



# FCC Test Report

FCC Part 15.247 for FHSS systems /  
CANADA RSS-210

FOR:

Handheld PC with BT

MODEL #: D7900LUPE, D7900BUPE

Hand Held Products, Inc.  
700 Vision Drive  
Skaneateles Falls, NY 13153  
U.S.A

FCC ID: HD57900LUPE, HD57900BUPE  
IC-ID : 1693B-79E

Test report no.: EMC\_HANDH\_015\_06002\_FCC15.247\_BT



Certificate # 2135.01



TTI-P-G  
081/94-A0

Accredited according to  
ISO/IEC 17025



Bluetooth  
Qualification Test  
Facility  
(BQTF)



FCC listed#  
101450

IC recognized #  
3925

## **CETECOM Inc.**

411 Dixon Landing Road ♦ Milpitas, CA 95035 ♦ U.S.A.

Phone: + 1 (408) 586 6200 ♦ Fax: + 1 (408) 586 6299 ♦ E-mail: [info@cetecomusa.com](mailto:info@cetecomusa.com) ♦ <http://www.cetecom.com>  
CETECOM Inc. is a Delaware Corporation with Corporation number: 2113686

Board of Directors: Dr. Harald Ansorge, Dr. Klaus Matkey, Hans Peter May

© Copyright by CETECOM

## **Table of Contents**

|            |                                |
|------------|--------------------------------|
| <b>1</b>   | <b>General information</b>     |
| <b>1.1</b> | <b>Notes</b>                   |
| <b>1.2</b> | <b>Testing laboratory</b>      |
| <b>1.3</b> | <b>Details of applicant</b>    |
| <b>1.4</b> | <b>Application details</b>     |
| <b>1.5</b> | <b>Test item</b>               |
| <b>1.6</b> | <b>Test standards</b>          |
| <b>2</b>   | <b>Technical test</b>          |
| <b>2.1</b> | <b>Summary of test results</b> |
| <b>2.2</b> | <b>Test report</b>             |

## **1 General information**

### **1.1 Notes**

The test results of this test report relate exclusively to the test item specified in 1.5. The CETECOM Inc. USA does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of the CETECOM Inc USA.

### **1.2 Testing laboratory**

**CETECOM Inc.**

**411 Dixon Landing Road, Milpitas, CA-95035, USA**

**Phone: +1 408 586 6200 Fax: +1 408 586 6299**

**E-mail: [lothar.schmidt@cetecomusa.com](mailto:lothar.schmidt@cetecomusa.com)**

**Internet: [www.cetecom.com](http://www.cetecom.com)**

**1.3 Details of applicant**

**Name** : Hand Held Products, Inc.  
**Street** : 700 Vision Drive  
**City / Zip Code** : Skaneateles Falls, NY 13153  
**Country** : U.S.A  
**Contact** : Naveen Velagapudi  
**Telephone** : +1 315 685 2931  
**Tele-fax** : +1 315 685 1210  
**e-mail** : [velagapudin@hhp.com](mailto:velagapudin@hhp.com)

**1.4 Application details**

Date of receipt test item : 2004-12-15  
Date of test : 2004-12-15/16

**1.5 Test item**

**Manufacturer** : Applicant  
**Marketing Name** : Dolphin 7900  
**Model No.** : **D7900LUPE. D7900BUPE**  
**Description** : [Dolphin 7900 is a ruggedized handheld computer which can read barcodes and other auto ID codes. It contains three different transmitters \(BT, WLAN and GSM\) to send and receive data.](#)  
**FCC-ID** : HD57900LUPE, HD57900BUPE  
**IC-ID** : 1693B-79E

**Additional information**

**Test Sample for BT** : s/n 0046785, 0046792 (used only for 30M-1GHz)  
**Frequency** : 2402MHz – 2480MHz for BT  
**Type of modulation** : GFSK  
**Number of channels** : 79  
**Antenna** : Internal  
**Power supply** : Battery or Charger (AC Adaptor)  
**Output power** : -11.4dBm (0.00007W) max. conducted peak power

**1.6 Test standards: FCC Part 15 §15.247 (DA00-705) / RSS 210**

**Note:** All radiated measurements were made in all three orthogonal planes. The values reported are the maximum values.

**PROJECT OVERVIEW:**

**NOTE:** This test report covers all radiated measurements as per FCC15.247 for BT module in HHP handheld computer model#D7900LUPE. For all conducted measurements please refer to *test report# BT\_cond\_Socket*.

**2 Technical test****2.1 Summary of test results**

No deviations from the technical specification(s) were ascertained in the course of the tests  
Performed

Final Verdict:  
(only “passed” if all single measurements are “passed”)

**Passed**

**Technical responsibility for area of testing:**

2006-07-28 EMC & Radio Michael Grings  
(Deputy Manager)



Date

Section

Name

Signature

## 2.2 Test report

### TEST REPORT

Test report no.: **EMC\_HANDH\_015\_06002\_FCC15.247\_BT**

## TEST REPORT REFERENCE

| LIST OF MEASUREMENTS                          |                  | PAGE |
|-----------------------------------------------|------------------|------|
| MAXIMUM PEAK OUTPUT POWER                     | § 15.247 (b) (1) | 9    |
| BAND EDGE COMPLIANCE                          | §15.247 (c)      | 14   |
| CONDUCTED EMISSIONS                           | § 15.107/207     | 29   |
| RECEIVER SPURIOUS RADIATION                   | § 15.209         | 31   |
| TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS |                  | 36   |
| BLOCK DIAGRAMS                                |                  | 37   |

**MAXIMUM PEAK OUTPUT POWER  
(CONDUCTED)**

§ 15.247 (b) (1)

| TEST CONDITIONS         |                  | MAXIMUM PEAK OUTPUT POWER (dBm) |       |       |
|-------------------------|------------------|---------------------------------|-------|-------|
| Frequency (MHz)         |                  | 2402                            | 2441  | 2480  |
| T <sub>nom</sub> (23)°C | V <sub>nom</sub> | -13.6                           | -12.7 | -11.4 |
| Measurement uncertainty |                  | ±0.5dBm                         |       |       |

RBW/VBW: 3 MHz

**LIMIT**

SUBCLAUSE § 15.247 (b) (1)

| Frequency range | RF power output    |
|-----------------|--------------------|
| 2400-2483.5 MHz | 1.0 Watt conducted |

**MAXIMUM PEAK OUTPUT POWER  
(RADIATED)****§ 15.247 (b) (1)****EIRP:**

| TEST CONDITIONS         |                  | MAXIMUM PEAK OUTPUT POWER (dBm) |        |        |
|-------------------------|------------------|---------------------------------|--------|--------|
| Frequency (MHz)         |                  | 2402                            | 2441   | 2480   |
| T <sub>nom</sub> (23)°C | V <sub>nom</sub> | -19.99                          | -21.63 | -22.65 |
| Measurement uncertainty |                  | ±0.5dBm                         |        |        |

RBW/VBW: 3 MHz

**LIMIT****SUBCLAUSE § 15.247 (b) (1)**

| Frequency range | RF power output    |
|-----------------|--------------------|
| 2400-2483.5 MHz | 1.0 Watt conducted |

## PEAK OUTPUT POWER (RADIATED)


§15.247 (b) (1)

### Lowest Channel: 2402MHz

SWEEP TABLE: "EIRP BT low channel"

Short Description: EIRP Bluetooth channel-2402MHz

| Start     | Stop      | Detector | Meas.   | IF    |
|-----------|-----------|----------|---------|-------|
| Frequency | Frequency |          | Time    | BW    |
| 2.397GHz  | 2.407GHz  | MaxPeak  | Coupled | 3 MHz |

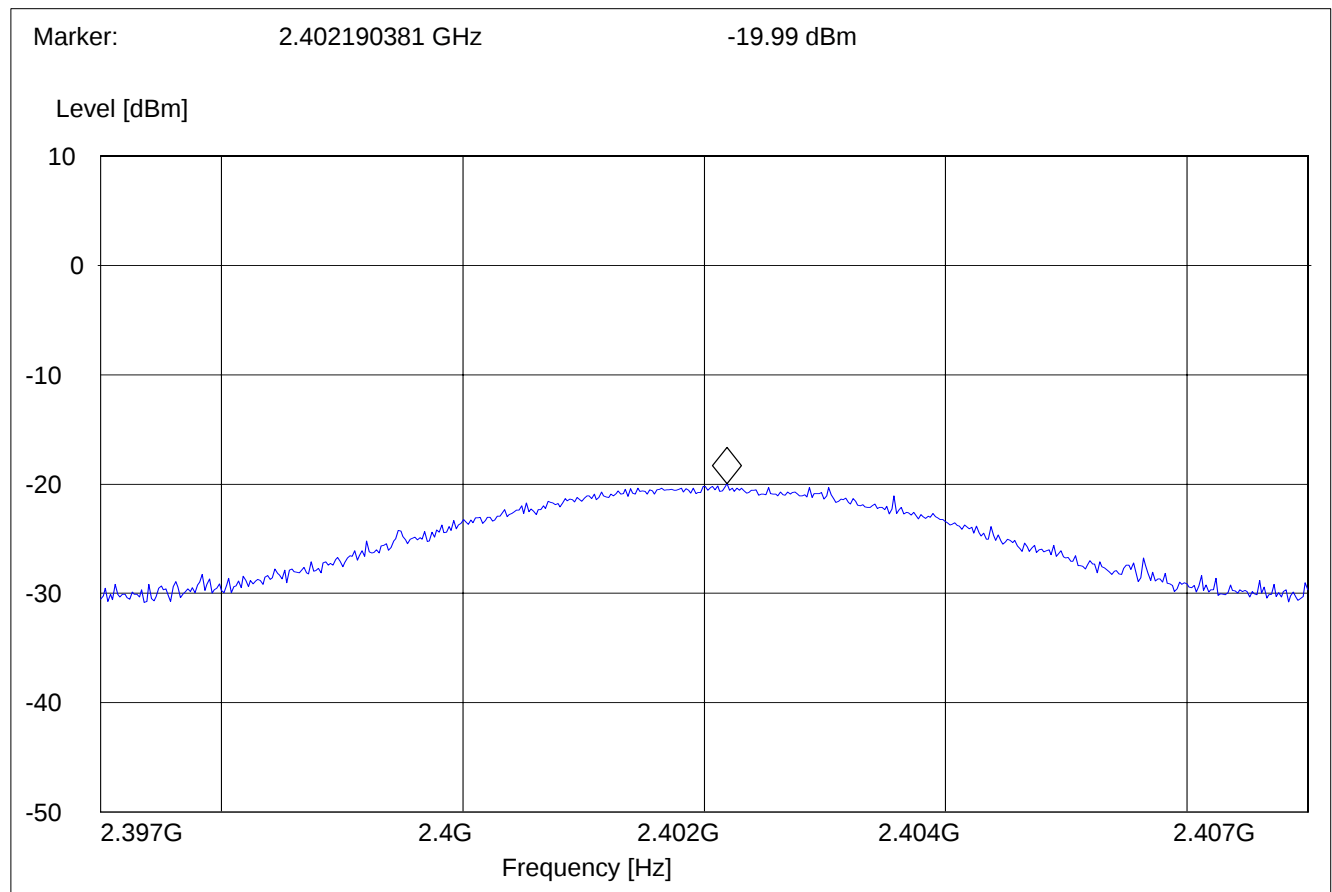

## PEAK OUTPUT POWER (RADIATED)


§15.247 (b) (1)

### Mid Channel: 2441MHz

SWEEP TABLE: "EIRP BT Mid channel"

Short Description: EIRP Bluetooth channel-2441MHz

| Start     | Stop      | Detector | Meas.   | IF    |
|-----------|-----------|----------|---------|-------|
| Frequency | Frequency |          | Time    | BW    |
| 2.436GHz  | 2.446GHz  | MaxPeak  | Coupled | 3 MHz |

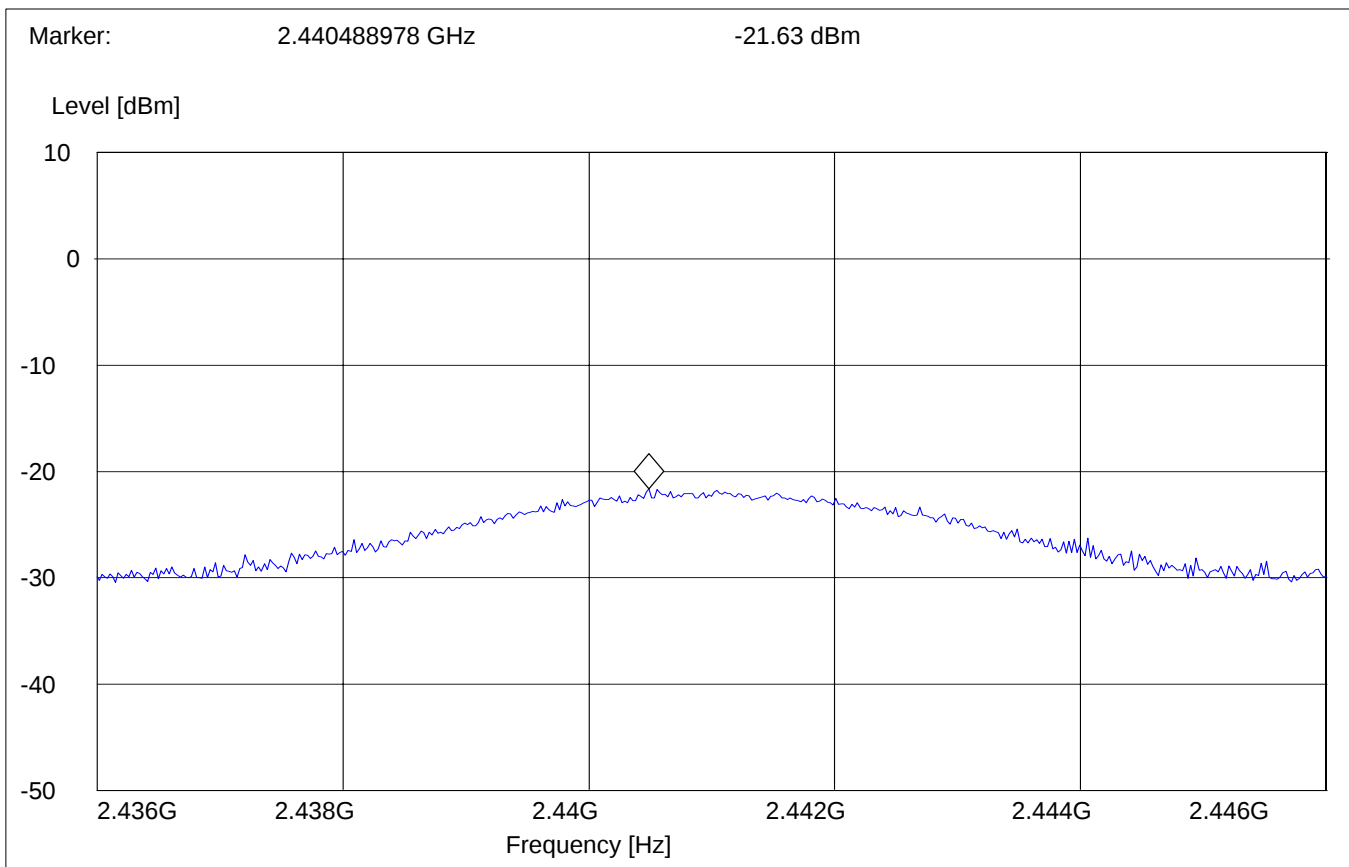

## PEAK OUTPUT POWER (RADIATED)


§15.247 (b) (1)

### Highest Channel: 2480MHz

SWEEP TABLE: "EIRP BT High channel"

Short Description: EIRP Bluetooth channel-2480MHz

| Start     | Stop      | Detector | Meas.   | IF    |
|-----------|-----------|----------|---------|-------|
| Frequency | Frequency |          | Time    | BW    |
| 2.475GHz  | 2.485GHz  | MaxPeak  | Coupled | 3 MHz |

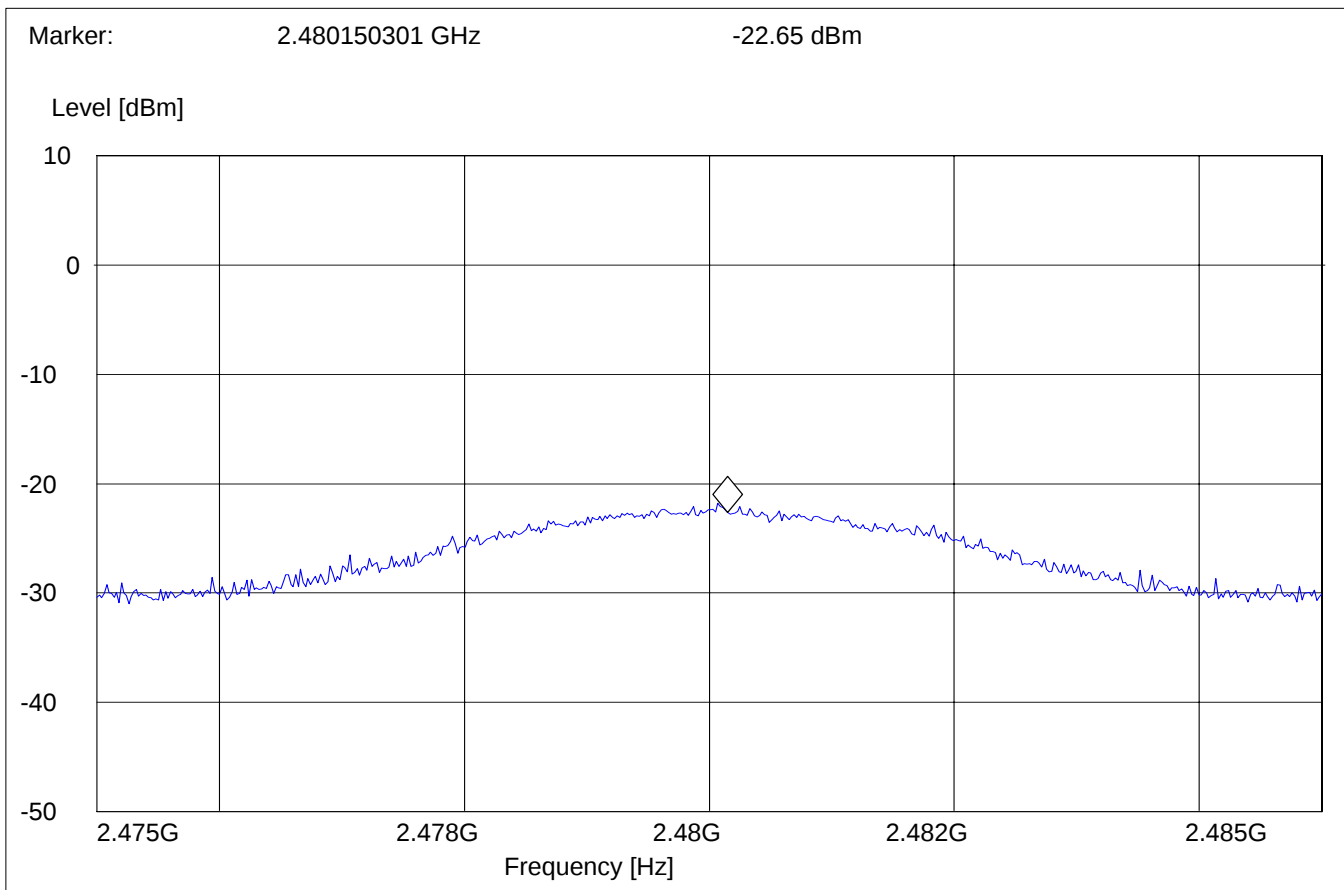

## BAND EDGE COMPLIANCE

§15.247 (c)


Low frequency section (spurious in the restricted band 2310 – 2390 MHz)

### Average Measurement

(This plot is valid for both Hopping ON & OFF)

Operating condition : Tx at 2402MHz  
 SWEEP TABLE : "FCC15.247 LBE\_AVG"  
 Short Description : FCC15.247 BT Low-band-edge  
 Limit Line : 54dBμV

| Start Frequency | Stop Frequency | Detector | Meas. Bandw. | RBW   | VBW  | Transducer      |
|-----------------|----------------|----------|--------------|-------|------|-----------------|
| 2.31 GHz        | 2.412 GHz      | MaxPeak  | Coupled      | 1 MHz | 10Hz | #326 horn (dBi) |

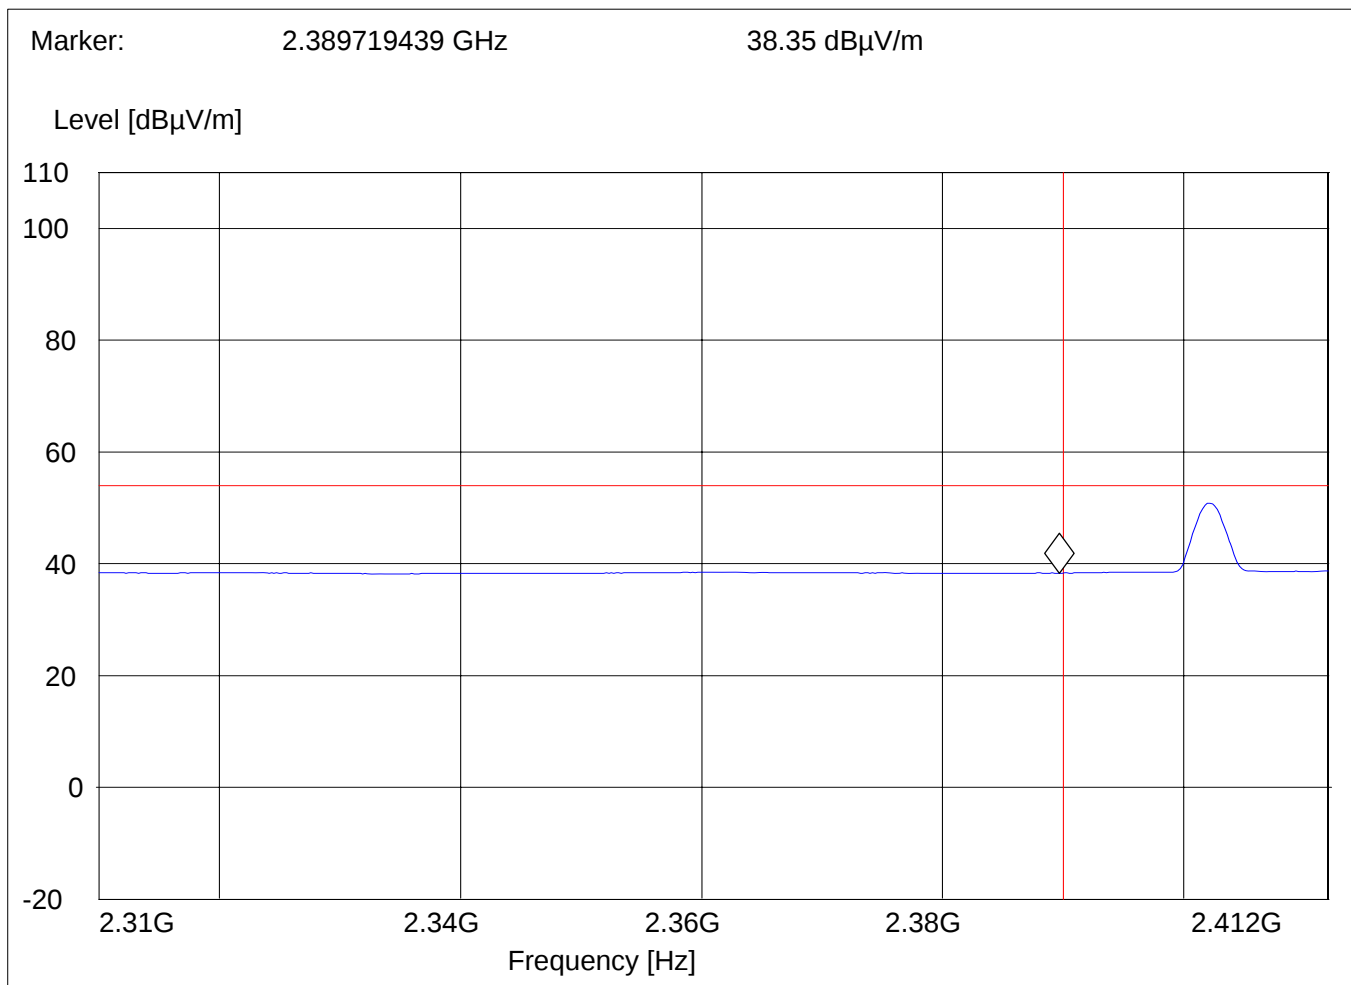

## BAND EDGE COMPLIANCE

§15.247 (c)


Low frequency section (spurious in the restricted band 2310 – 2390 MHz)

### Peak Measurement

(This plot is valid for both Hopping ON & OFF)

Operating condition : Tx at 2402MHz  
 SWEEP TABLE : "FCC15.247 LBE\_Pk"  
 Short Description : FCC15.247 BT Low-band-edge  
 Limit Line : 74dBμV

| Start Frequency | Stop Frequency | Detector | Meas. Bandw. | RBW   | VBW  | Transducer      |
|-----------------|----------------|----------|--------------|-------|------|-----------------|
| 2.31 GHz        | 2.412 GHz      | MaxPeak  | Coupled      | 1 MHz | 1MHz | #326 horn (dBi) |

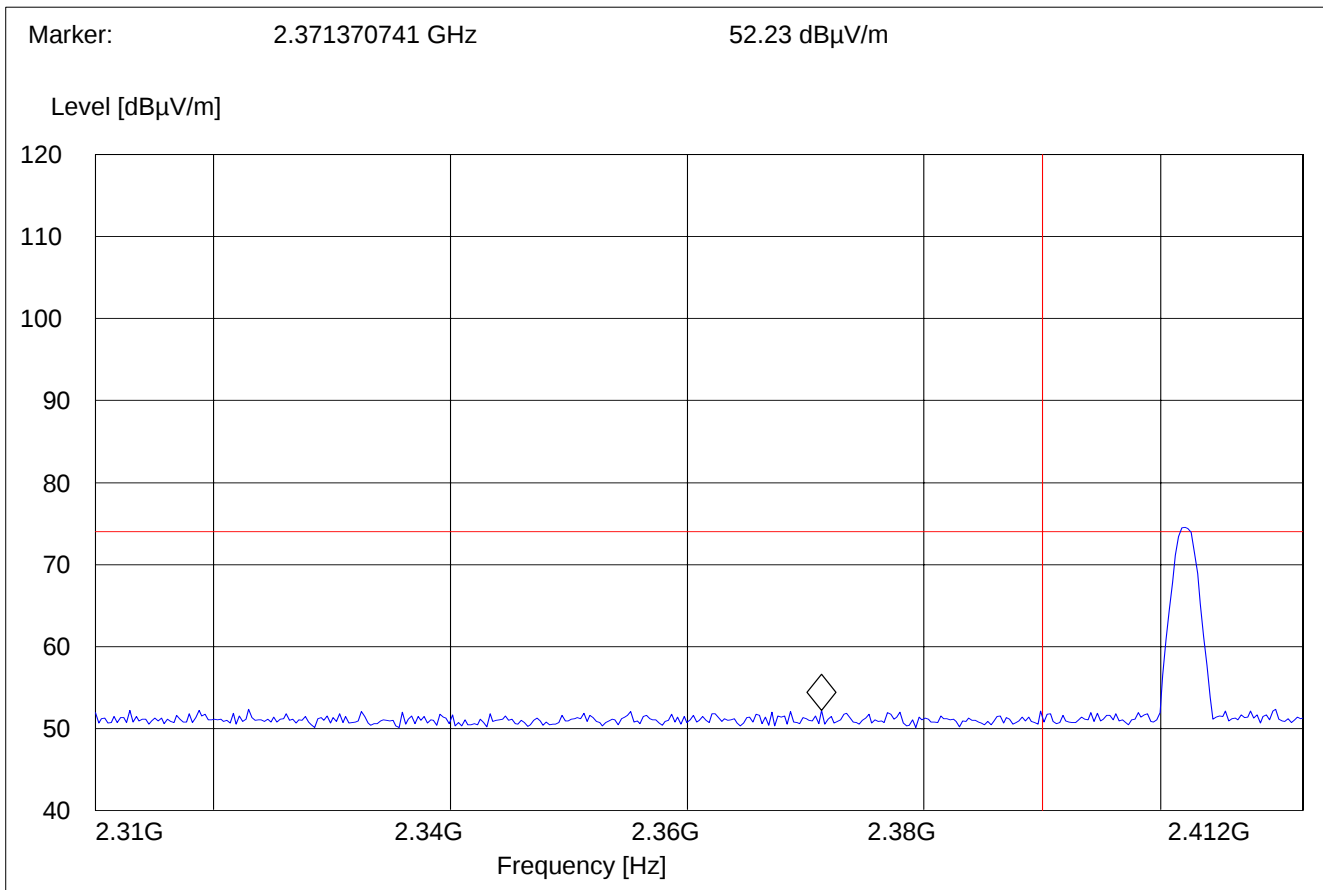

## BAND EDGE COMPLIANCE

§15.247 (c)


**High frequency section (spurious in the restricted band 2483.5 – 2500 MHz)**

### Average Measurement

**(This plot is valid for both Hopping ON & OFF)**

Operating condition : Tx at 2480MHz  
 SWEEP TABLE : "FCC15.247 HBE\_AVG"  
 Short Description : FCC15.247 BT High-band-edge  
 Limit Line : 54dB $\mu$ V

| Start Frequency | Stop Frequency | Detector Time | Meas. Bandw. | RBW   | VBW  | Transducer      |
|-----------------|----------------|---------------|--------------|-------|------|-----------------|
| 2.462 GHz       | 2.5 GHz        | MaxPeak       | Coupled      | 1 MHz | 10Hz | #326 horn (dBi) |

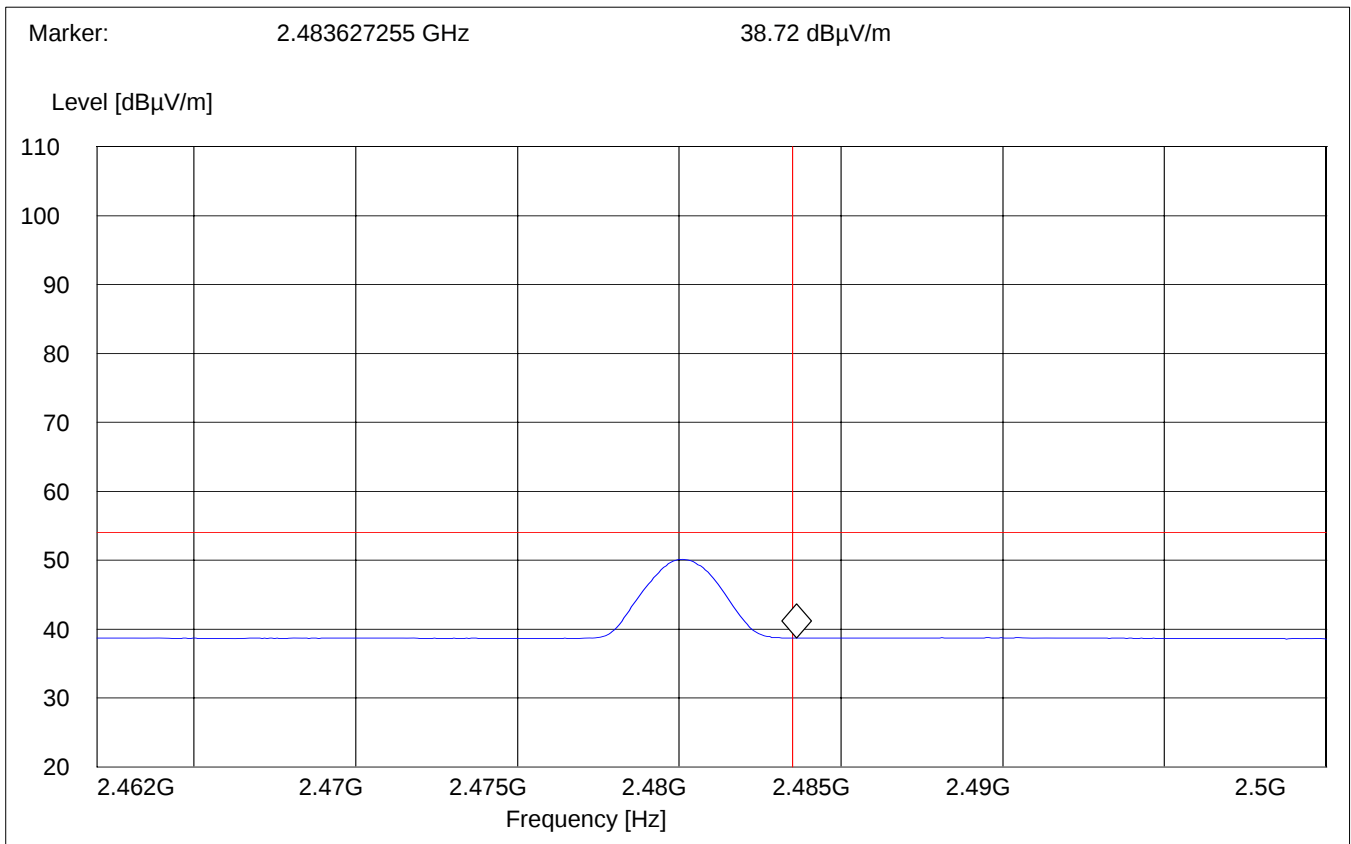

## BAND EDGE COMPLIANCE

§15.247 (c)


**High frequency section (spurious in the restricted band 2483.5 – 2500 MHz)**

### Peak Measurement

**(This plot is valid for both Hopping ON & OFF)**

Operating condition : Tx at 2480MHz  
 SWEEP TABLE : "FCC15.247 HBE\_PK"  
 Short Description : FCC15.247 BT High-band-edge  
 Limit Line : 74dBμV

| Start Frequency | Stop Frequency | Detector | Meas. Bandw. | RBW   | VBW  | Transducer      |
|-----------------|----------------|----------|--------------|-------|------|-----------------|
| 2.462 GHz       | 2.5 GHz        | MaxPeak  | Coupled      | 1 MHz | 1MHz | #326 horn (dBi) |

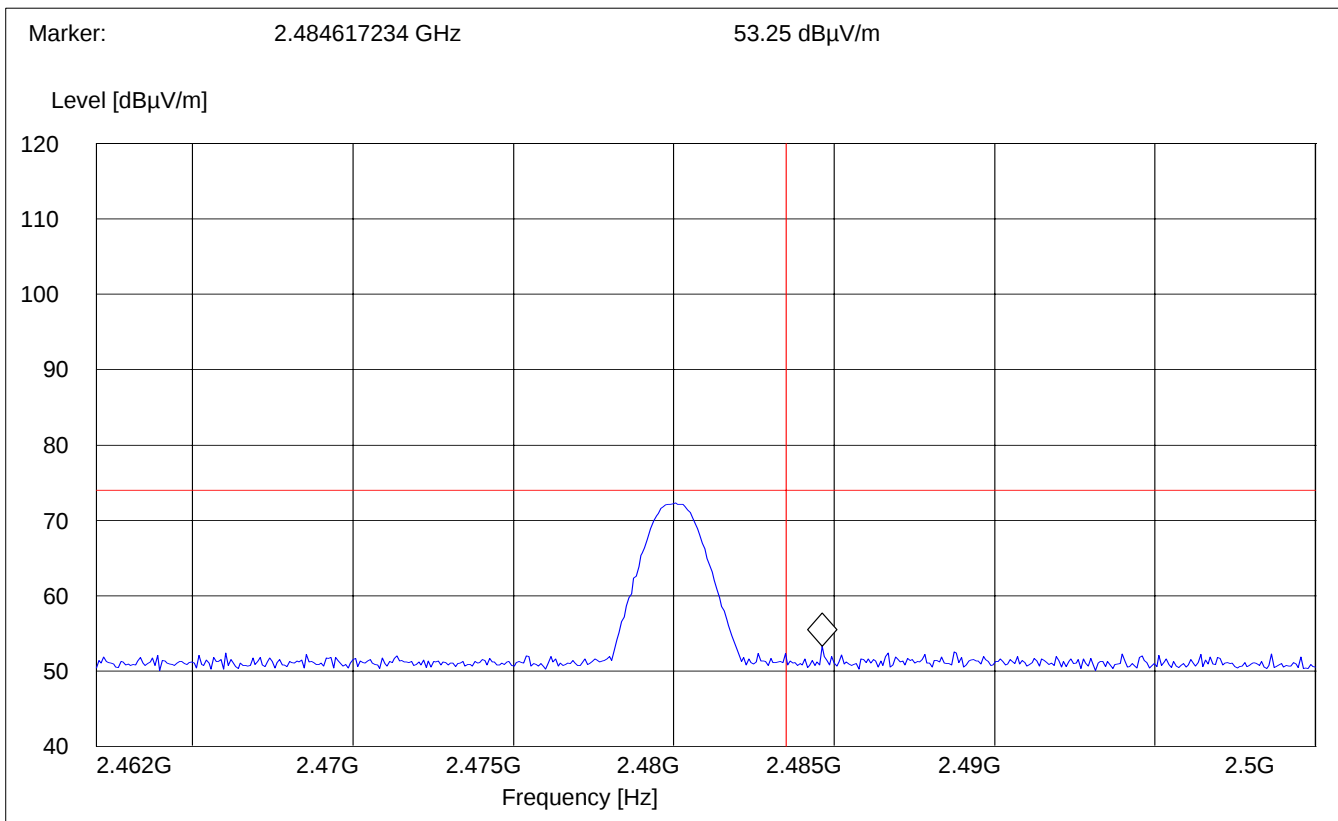

**EMISSION LIMITATIONS**

**§ 15.247 (c) (1)**

**Transmitter (Radiated)**

**LIMITS**

|                                                                                                                                                                                                                                                                                                                         |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p><b>In any 100 kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions that fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).</b></p> |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

**NOTE:**

1. The radiated emissions were done with different settings, using the relevant pre-amplifiers for the relevant frequency ranges. This is the reason that the graphs show different noise levels. In the range between 3 and 26.5 GHz very short cable connections to the antenna was used to minimize the noise level.
2. Frequency resolution is not fine enough to show the exact frequency of the carrier, refer to plots under EIRP.
3. All measurements are done in peak mode unless specified with plots.

**Results for the radiated measurements below 30MHz according § 15.33**

| Frequency    | Measured values                       | Remarks                                   |
|--------------|---------------------------------------|-------------------------------------------|
| 9KHz – 30MHz | No emissions found, caused by the EUT | This is valid for all the tested channels |

**EMISSION LIMITATIONS - Radiated (Transmitter)****§ 15.247 (c) (1)**

**Note: All radiated measurements were made in all three orthogonal planes. The values reported are the maximum values.**

| Transmit at Lowest channel Frequency 2402MHz  |                |            |         |
|-----------------------------------------------|----------------|------------|---------|
| Frequency (MHz)                               | Level (dBµV/m) |            |         |
|                                               | Peak           | Quasi-Peak | Average |
| SEE PLOTS                                     |                |            |         |
|                                               |                |            |         |
| Transmit at Middle channel Frequency 2441MHz  |                |            |         |
| Frequency (MHz)                               | Level (dBµV/m) |            |         |
|                                               | Peak           | Quasi-Peak | Average |
| SEE PLOTS                                     |                |            |         |
|                                               |                |            |         |
|                                               |                |            |         |
| Transmit at Highest channel Frequency 2480MHz |                |            |         |
| Frequency (MHz)                               | Level (dBµV/m) |            |         |
|                                               | Peak           | Quasi-Peak | Average |
| SEE PLOTS                                     |                |            |         |
|                                               |                |            |         |

## EMISSION LIMITATIONS - Radiated (Transmitter)


§ 15.247 (c) (1)

30MHz – 1GHz

Antenna: vertical

**Note: This plot is valid for low, mid & high channels (worst-case plot)**

|                    |           |                      |         |         |            |
|--------------------|-----------|----------------------|---------|---------|------------|
| SWEEP TABLE:       |           | "BT Spuri hi 30-1G"  |         |         |            |
| Short Description: |           | Bluetooth 30MHz-1GHz |         |         |            |
| Start              | Stop      | Detector             | Meas.   | RBW     | Transducer |
| Frequency          | Frequency |                      | Time    | VBW     |            |
| 30.0 MHz           | 1.0 GHz   | MaxPeak              | Coupled | 100 kHz | 3141-#1186 |

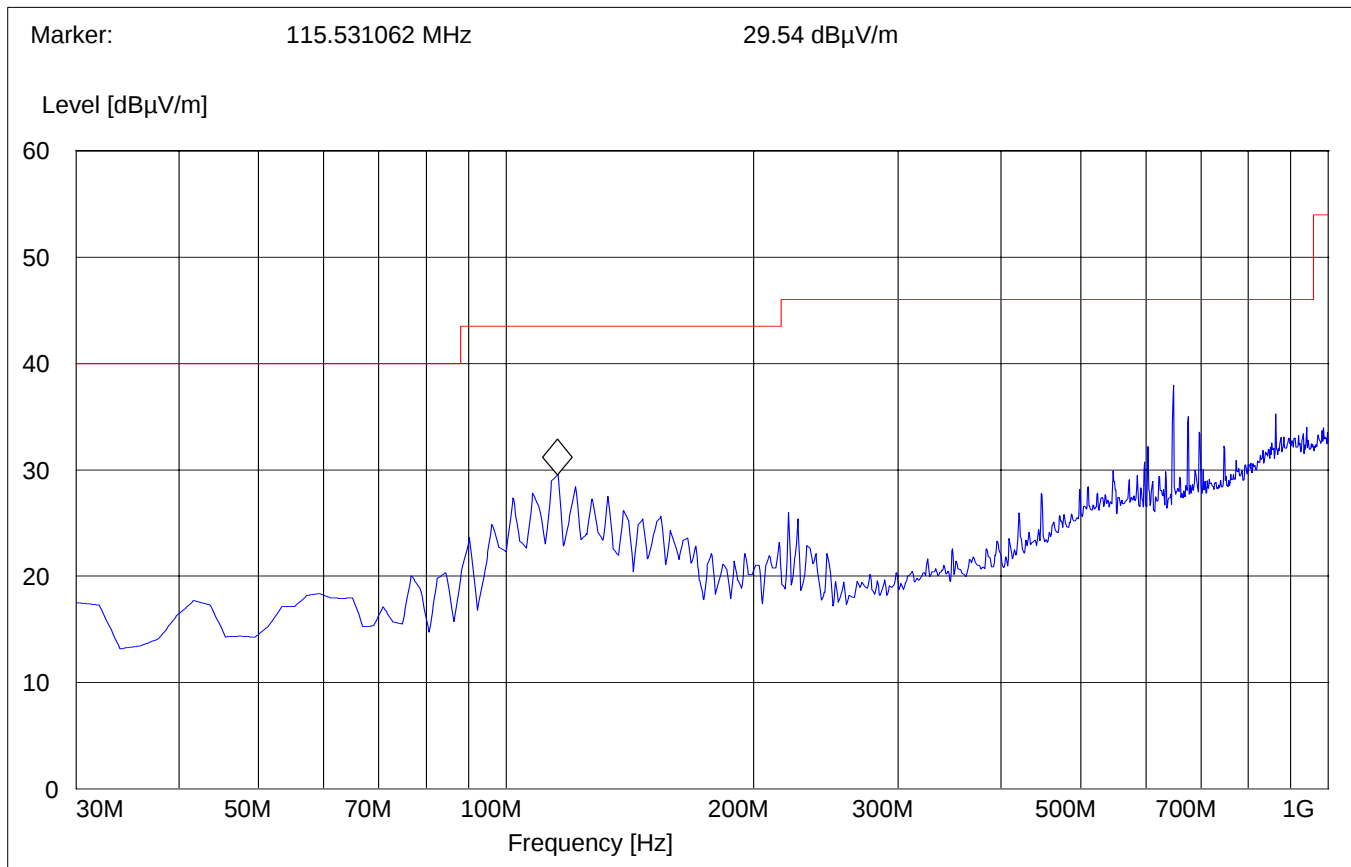

## EMISSION LIMITATIONS - Radiated (Transmitter)


§ 15.247 (c) (1)

30MHz – 1GHz

Antenna: horizontal

**Note: This plot is valid for low, mid & high channels (worst-case plot)**

|                    |           |                      |         |         |            |
|--------------------|-----------|----------------------|---------|---------|------------|
| SWEEP TABLE:       |           | "BT Spuri hi 30-1G"  |         |         |            |
| Short Description: |           | Bluetooth 30MHz-1GHz |         |         |            |
| Start              | Stop      | Detector             | Meas.   | RBW     | Transducer |
| Frequency          | Frequency |                      | Time    | VBW     |            |
| 30.0 MHz           | 1.0 GHz   | MaxPeak              | Coupled | 100 kHz | 3141-#1186 |

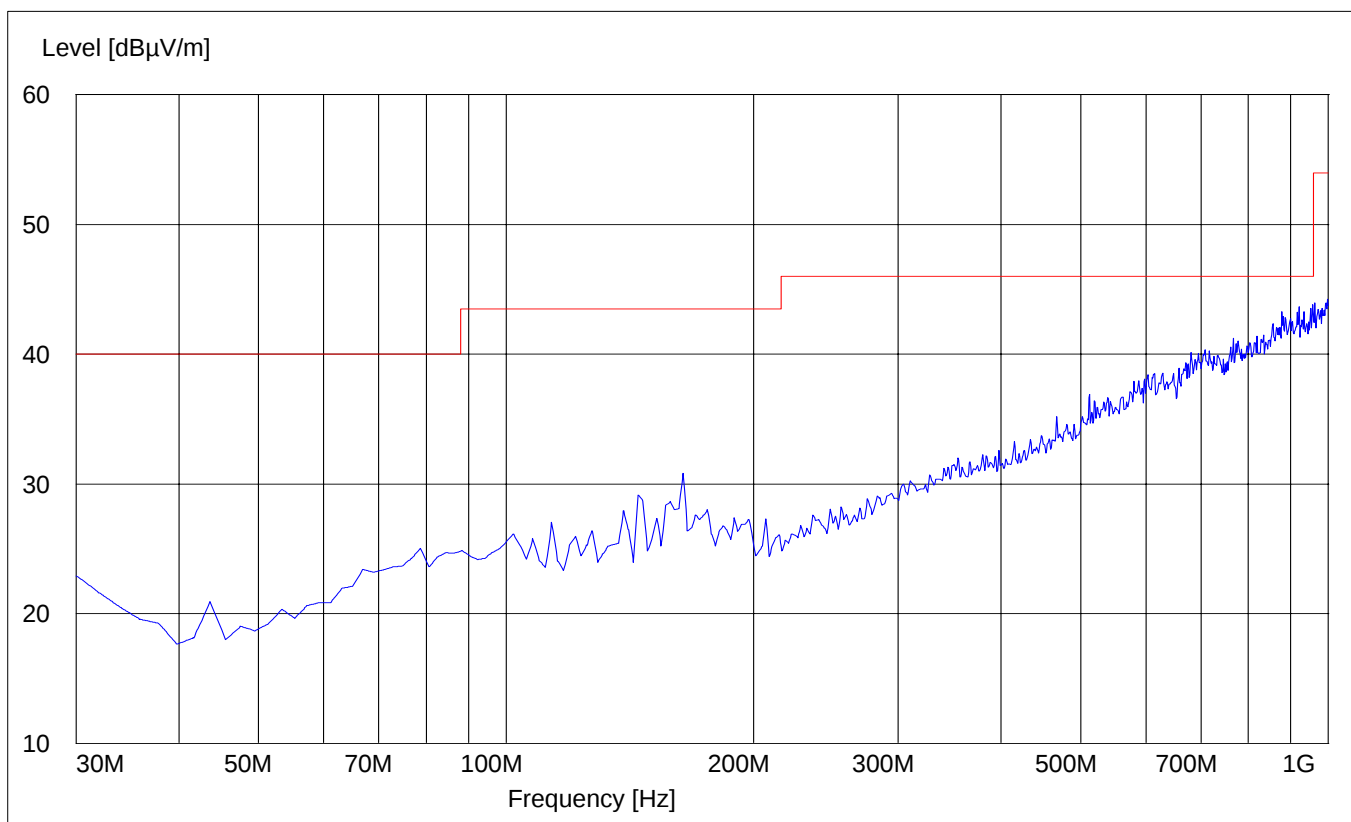


# EMISSION LIMITATIONS - Radiated (Transmitter)

§ 15.247 (c) (1)

Lowest Channel (2402MHz): 1GHz – 3GHz

NOTE: The peak is the carrier frequency.

|                    |           |                           |         |       |                 |
|--------------------|-----------|---------------------------|---------|-------|-----------------|
| SWEEP TABLE:       |           | "BT Spuri hi 1-3G"        |         |       |                 |
| Short Description: |           | Bluetooth Spurious 1-3GHz |         |       |                 |
| Start              | Stop      | Detector                  | Meas.   | RBW   | Transducer      |
| Frequency          | Frequency | Time                      | Bandw.  | VBW   |                 |
| 1.0 GHz            | 3.0 GHz   | MaxPeak                   | Coupled | 1 MHz | #326 horn (dBi) |

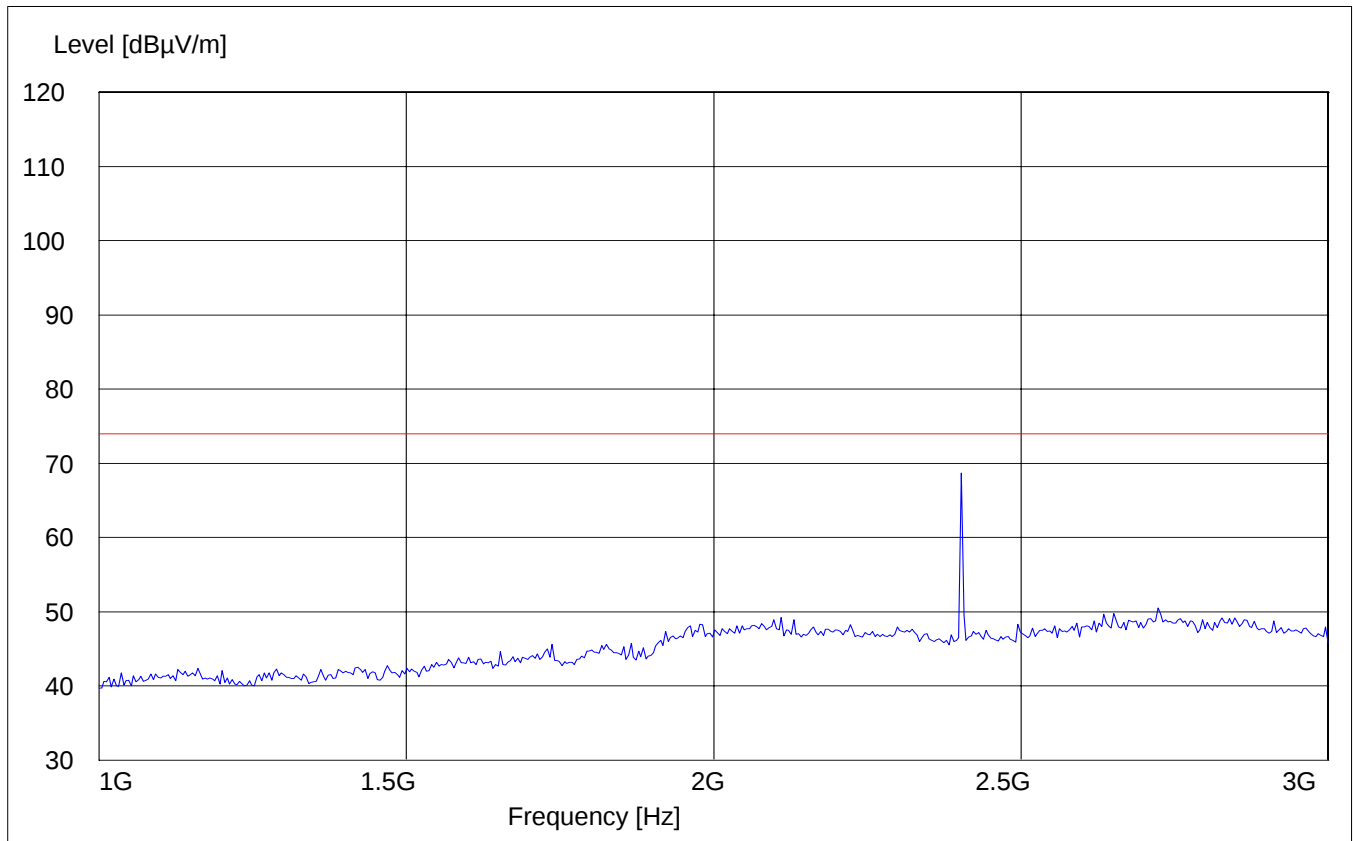


## EMISSION LIMITATIONS - Radiated (Transmitter)

§ 15.247 (c) (1)

### Lowest Channel (2402MHz): 3GHz – 18GHz

|                    |           |                             |         |       |                 |
|--------------------|-----------|-----------------------------|---------|-------|-----------------|
| SWEEP TABLE:       |           | "BT Spuri hi 3-18G"         |         |       |                 |
| Short Description: |           | Bluetooth Spurious 3-18 GHz |         |       |                 |
| Start              | Stop      | Detector                    | Meas.   | RBW   | Transducer      |
| Frequency          | Frequency | Time                        | Bandw.  | VBW   |                 |
| 3.0 GHz            | 18.0 GHz  | MaxPeak                     | Coupled | 1 MHz | #326 horn (dBi) |

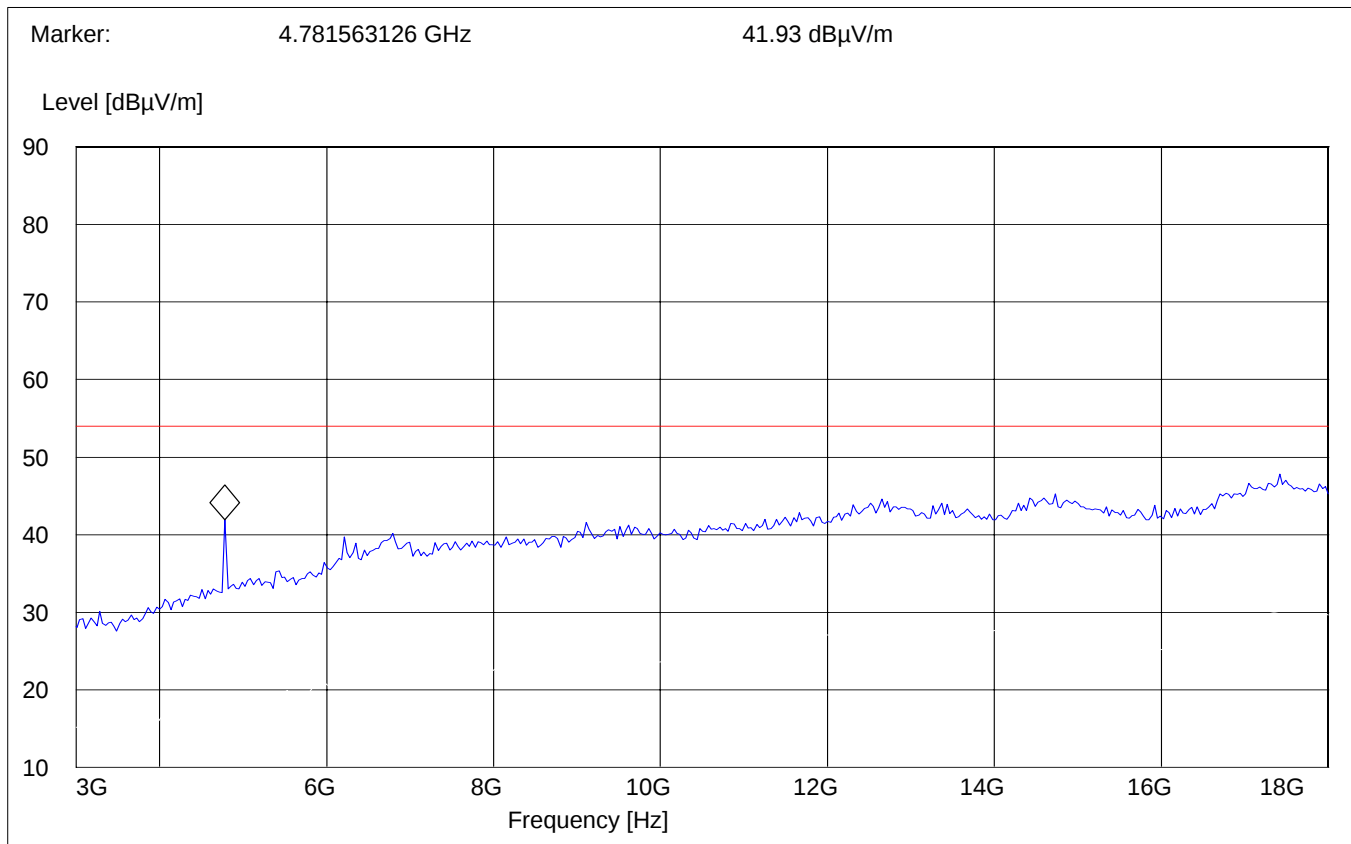


**EMISSION LIMITATIONS - Radiated (Transmitter)**  
**Middle Channel (2441MHz): 1GHz – 3GHz**

§ 15.247 (c) (1)

**NOTE: The peak is the carrier frequency.**


|                    |           |                           |         |       |                 |
|--------------------|-----------|---------------------------|---------|-------|-----------------|
| SWEEP TABLE:       |           | "BT Spuri hi 1-3G"        |         |       |                 |
| Short Description: |           | Bluetooth Spurious 1-3GHz |         |       |                 |
| Start              | Stop      | Detector                  | Meas.   | RBW   | Transducer      |
| Frequency          | Frequency | Time                      | Bandw.  | VBW   |                 |
| 1.0 GHz            | 3.0 GHz   | MaxPeak                   | Coupled | 1 MHz | #326 horn (dBi) |

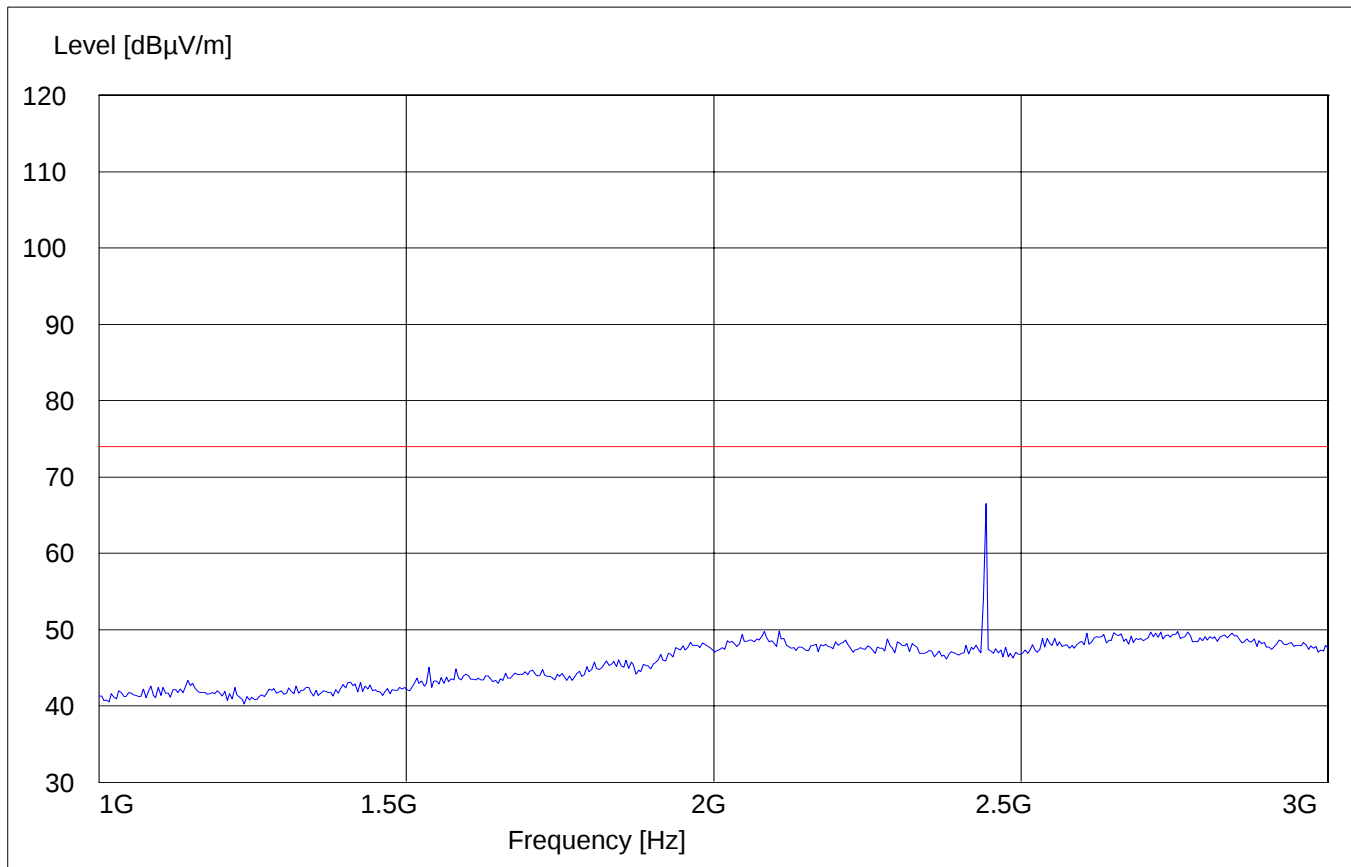

**EMISSION LIMITATIONS - Radiated (Transmitter)**  
**Middle Channel (2441MHz): 3GHz – 18GHz**

§ 15.247 (c) (1)

|                    |           |                            |         |       |                 |
|--------------------|-----------|----------------------------|---------|-------|-----------------|
| SWEEP TABLE:       |           | "BT Spuri hi 3-18G"        |         |       |                 |
| Short Description: |           | Bluetooth Spurious 3-18GHz |         |       |                 |
| Start              | Stop      | Detector                   | Meas.   | RBW   | Transducer      |
| Frequency          | Frequency | Time                       | Bandw.  | VBW   |                 |
| 3.0 GHz            | 18.0 GHz  | MaxPeak                    | Coupled | 1 MHz | #326 horn (dBi) |

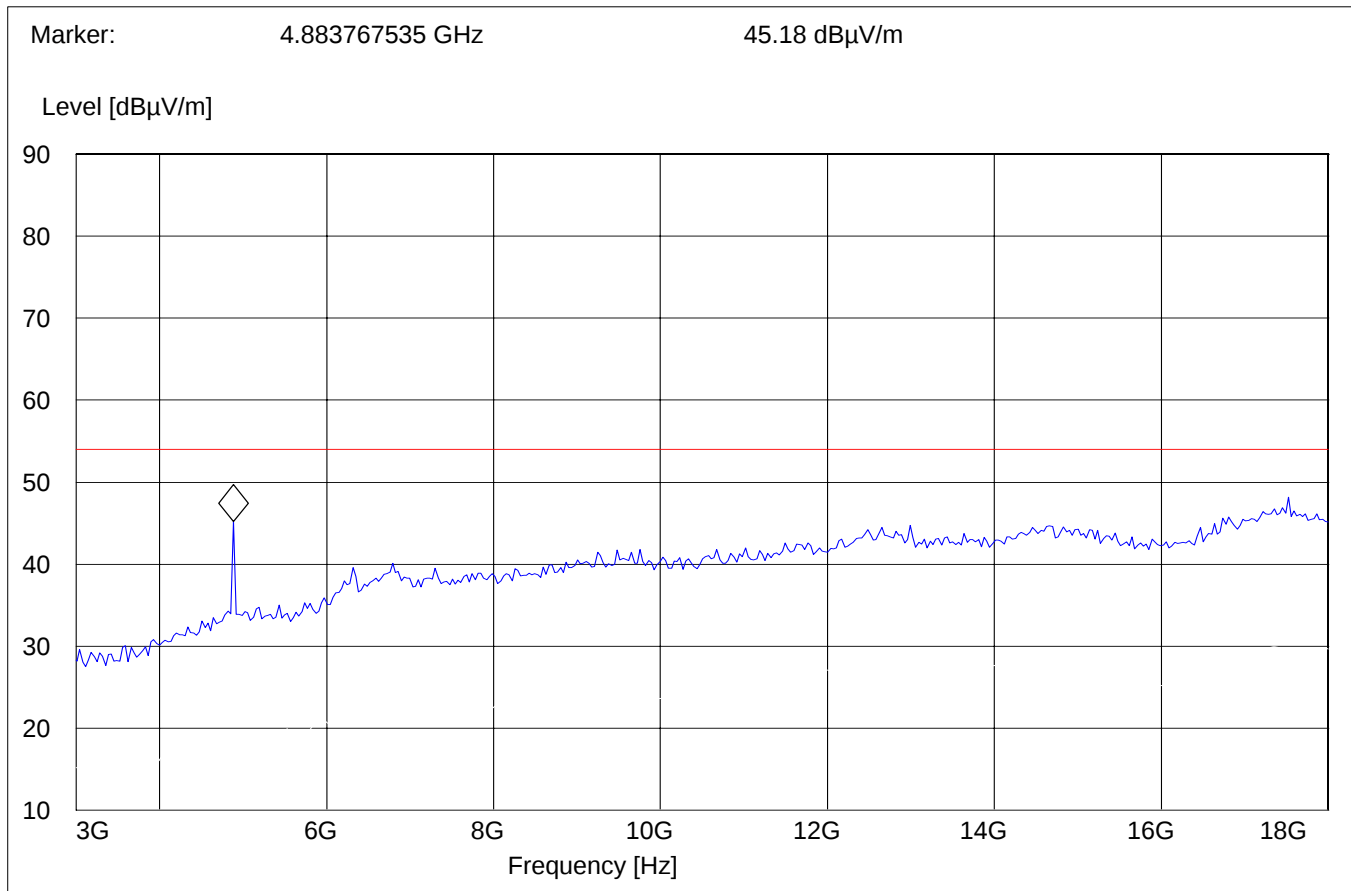


## EMISSION LIMITATIONS - Radiated (Transmitter)

§ 15.247 (c) (1)

Highest Channel (2480MHz): 1GHz – 3GHz

NOTE: The peak is the carrier frequency.

|                    |           |                           |         |       |                 |
|--------------------|-----------|---------------------------|---------|-------|-----------------|
| SWEEP TABLE:       |           | "BT Spuri hi 1-3G"        |         |       |                 |
| Short Description: |           | Bluetooth Spurious 1-3GHz |         |       |                 |
| Start              | Stop      | Detector                  | Meas.   | RBW   | Transducer      |
| Frequency          | Frequency | Time                      | Bandw.  | VBW   |                 |
| 1.0 GHz            | 3.0 GHz   | MaxPeak                   | Coupled | 1 MHz | #326 horn (dBi) |

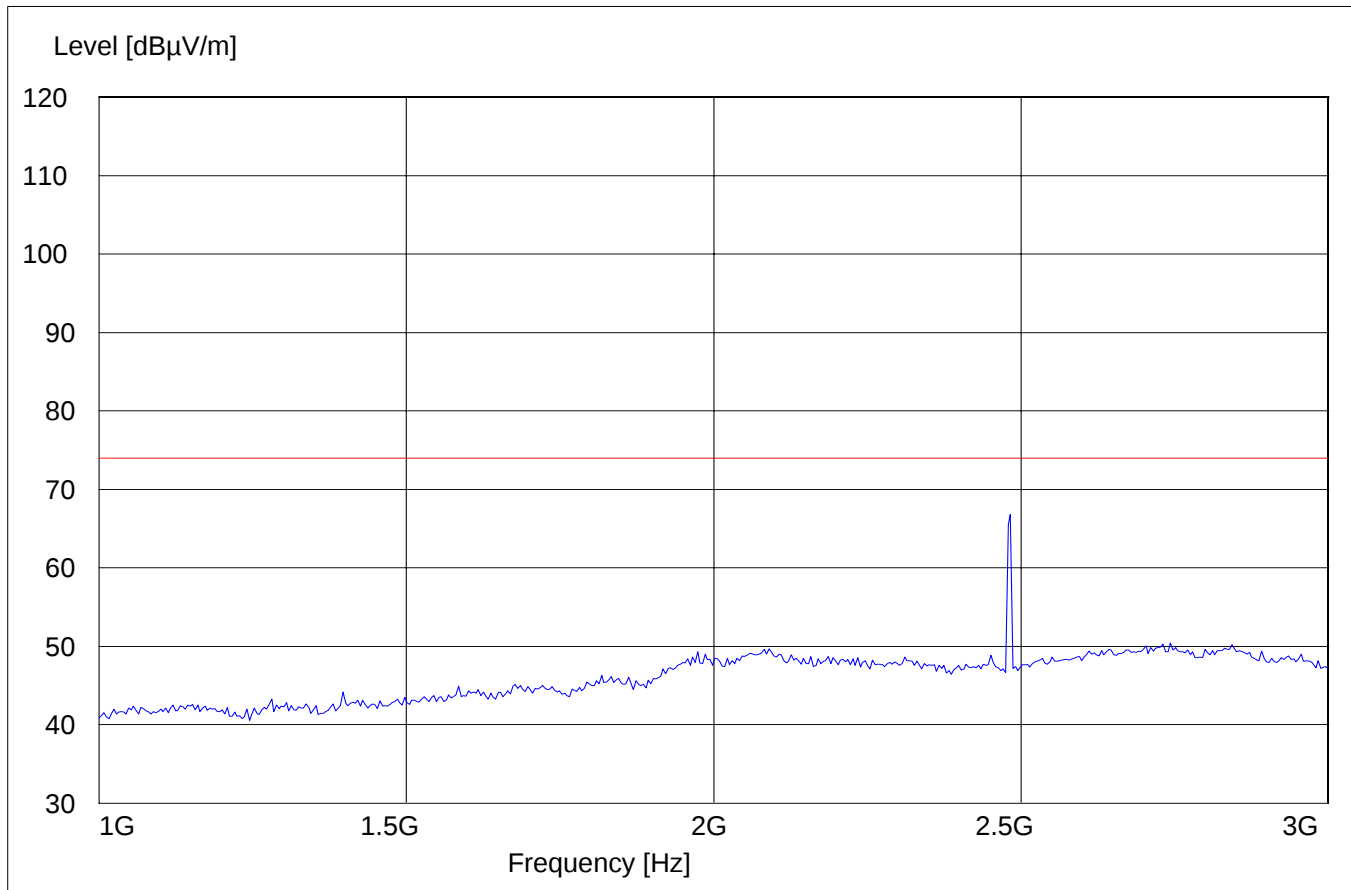


## EMISSION LIMITATIONS - Radiated (Transmitter)

§ 15.247 (c) (1)

### Highest Channel (2480MHz): 3GHz – 18GHz

|                    |           |                            |         |       |                 |
|--------------------|-----------|----------------------------|---------|-------|-----------------|
| SWEEP TABLE:       |           | "BT Spuri hi 3-18G"        |         |       |                 |
| Short Description: |           | Bluetooth Spurious 3-18GHz |         |       |                 |
| Start              | Stop      | Detector                   | Meas.   | RBW   | Transducer      |
| Frequency          | Frequency | Time                       | Bandw.  | VBW   |                 |
| 3.0 GHz            | 18.0 GHz  | MaxPeak                    | Coupled | 1 MHz | #326 horn (dBi) |

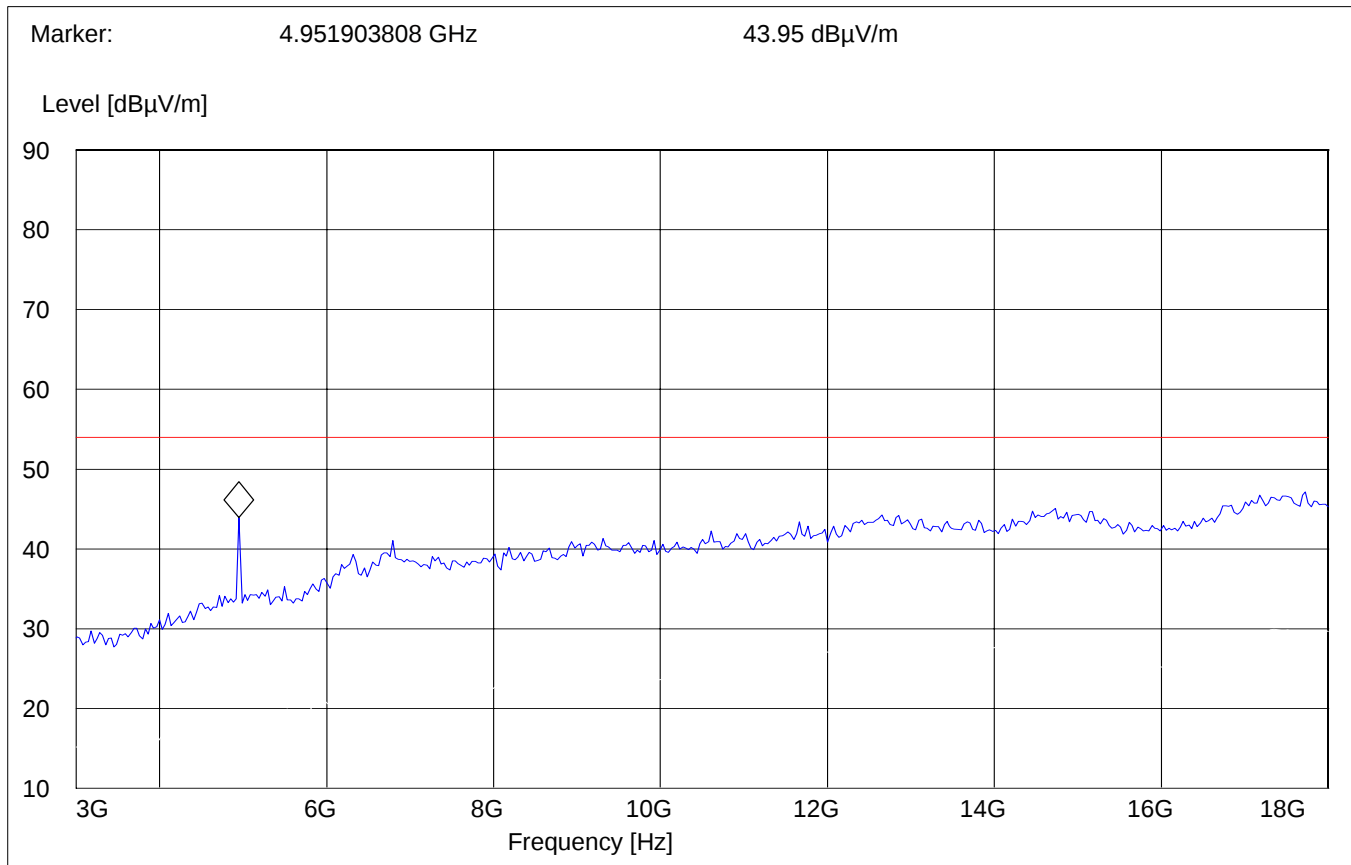


## EMISSION LIMITATIONS - Radiated (Transmitter)

§ 15.247 (c) (1)

18GHz – 26.5GHz

**Note: This plot is valid for low, mid & high channels (worst-case plot)**

|                    |           |                               |         |       |                 |
|--------------------|-----------|-------------------------------|---------|-------|-----------------|
| SWEEP TABLE:       |           | "BT Spuri hi 18-26.5G"        |         |       |                 |
| Short Description: |           | Bluetooth Spurious 18-26.5GHz |         |       |                 |
| Start              | Stop      | Detector                      | Meas.   | RBW   | Transducer      |
| Frequency          | Frequency | Time                          | Bandw.  | VBW   |                 |
| 18 GHz             | 26.5 GHz  | MaxPeak                       | Coupled | 1 MHz | #141 horn (dBi) |

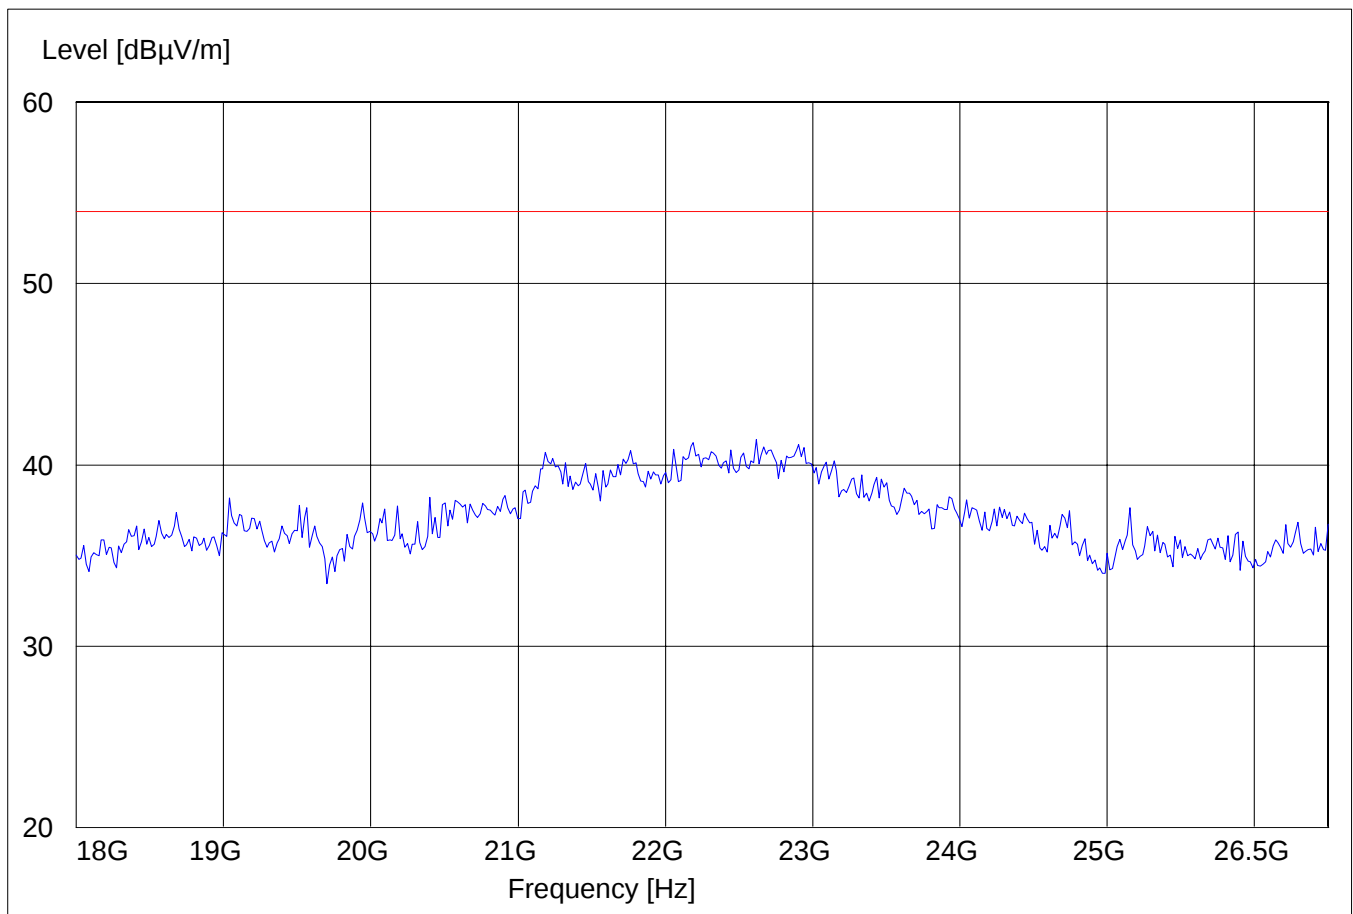

## CONDUCTED EMISSIONS

§ 15.107/207

Technical specification: 15.107 / 15.207 (Revised as of August 20, 2002)


### Limit

| Frequency of Emission (MHz) | Conducted Limit (dBµV) |           |
|-----------------------------|------------------------|-----------|
|                             | Quasi-Peak             | Average   |
| 0.15 – 0.5                  | 66 to 56*              | 56 to 46* |
| 0.5 – 5                     | 56                     | 46        |
| 5 – 30                      | 60                     | 50        |

\* Decreases with logarithm of the frequency

ANALYZER SETTINGS: RBW = 10KHz

VBW = 10KHz

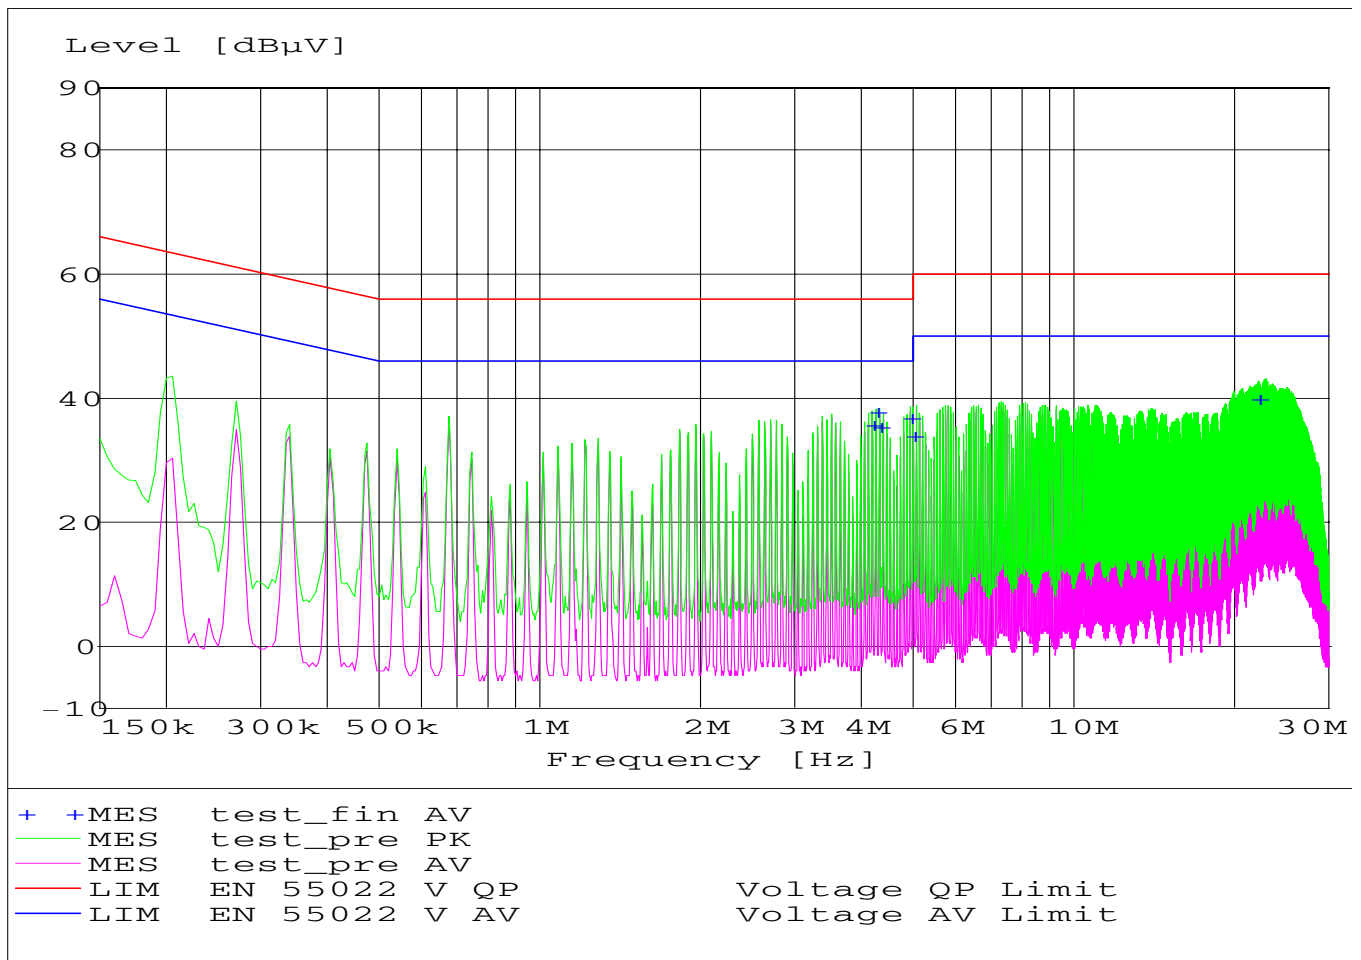

**MEASUREMENT RESULT: "test\_fin AV"**

| <b>Frequency</b> | <b>Level</b> | <b>Transd</b> | <b>Limit</b> | <b>Margin</b> | <b>Line</b> | <b>PE</b> |
|------------------|--------------|---------------|--------------|---------------|-------------|-----------|
| <b>MHz</b>       | <b>dBµV</b>  | <b>dB</b>     | <b>dBµV</b>  | <b>dB</b>     |             |           |
| 4.190000         | 35.80        | 0.0           | 46           | 10.2          | N           | GND       |
| 4.260000         | 37.90        | 0.0           | 46           | 8.1           | N           | GND       |
| 4.325000         | 35.40        | 0.0           | 46           | 10.6          | N           | GND       |
| 4.935000         | 36.90        | 0.0           | 46           | 9.1           | N           | GND       |
| 5.000000         | 34.00        | 0.0           | 46           | 12.0          | N           | GND       |
| 22.110000        | 39.90        | 0.0           | 50           | 10.1          | N           | GND       |

**RECEIVER SPURIOUS RADIATION****§ 15.209****Limits**

| Frequency (MHz) | Field strength (µV/m) | Measurement distance (m) |
|-----------------|-----------------------|--------------------------|
| 0.009 - 0.490   | 2400/F(kHz)           | 300                      |
| 0.490 - 1.705   | 24000/F(kHz)          | 30                       |
| 1.705 - 30.0    | 30                    | 30                       |
| 30 - 88         | 100                   | 3                        |
| 88 - 216        | 150                   | 3                        |
| 216 - 960       | 200                   | 3                        |
| above 960       | 500                   | 3                        |


**NOTE:**

1. The radiated emissions were done with different settings, using the relevant pre-amplifiers for the relevant frequency ranges. This is the reason that the graphs show different noise levels. In the range between 3 and 26.5 GHz very short cable connections to the antenna was used to minimize the noise level.
2. All measurements are done in peak mode unless specified with the plots.

**RECEIVER SPURIOUS RADIATION****§ 15.209****30MHz – 1GHz****Antenna: vertical (worst-case plot)**

SWEEP TABLE: "BT Spuri hi 30-1G"  
Short Description: Bluetooth 30MHz-1GHz


| Start     | Stop      | Detector | Meas.   | RBW     | Transducer |
|-----------|-----------|----------|---------|---------|------------|
| Frequency | Frequency |          | Time    | VBW     |            |
| 30.0 MHz  | 1.0 GHz   | MaxPeak  | Coupled | 100 kHz | 3141-#1186 |

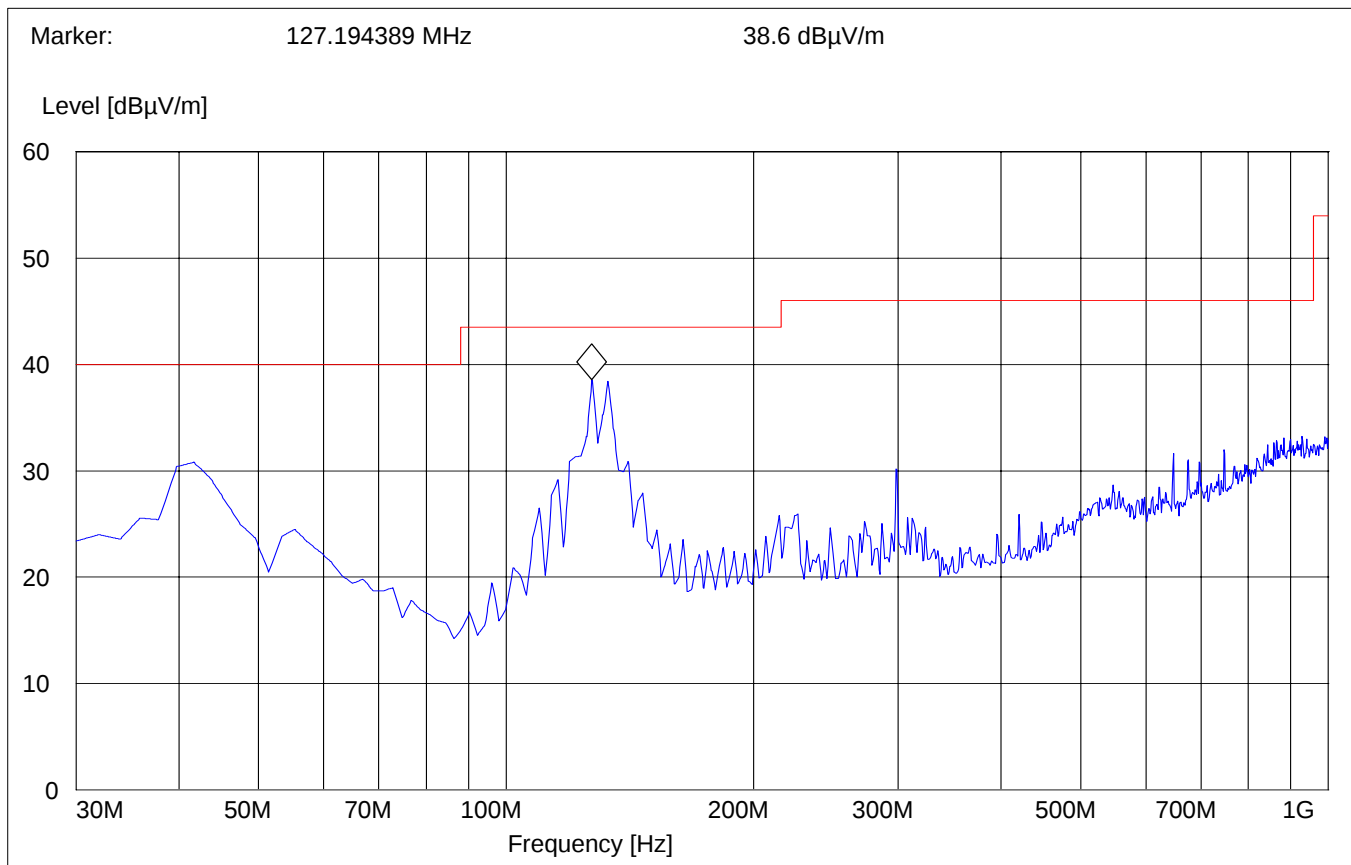

## RECEIVER SPURIOUS RADIATION 1GHz – 3GHz

§ 15.209


|                    |           |                           |         |       |                 |
|--------------------|-----------|---------------------------|---------|-------|-----------------|
| SWEEP TABLE:       |           | "BT Spuri hi 1-3G"        |         |       |                 |
| Short Description: |           | Bluetooth Spurious 1-3GHz |         |       |                 |
| Start              | Stop      | Detector                  | Meas.   | RBW   | Transducer      |
| Frequency          | Frequency | Time                      | Bandw.  | VBW   |                 |
| 1.0 GHz            | 3.0 GHz   | MaxPeak                   | Coupled | 1 MHz | #326 horn (dBi) |

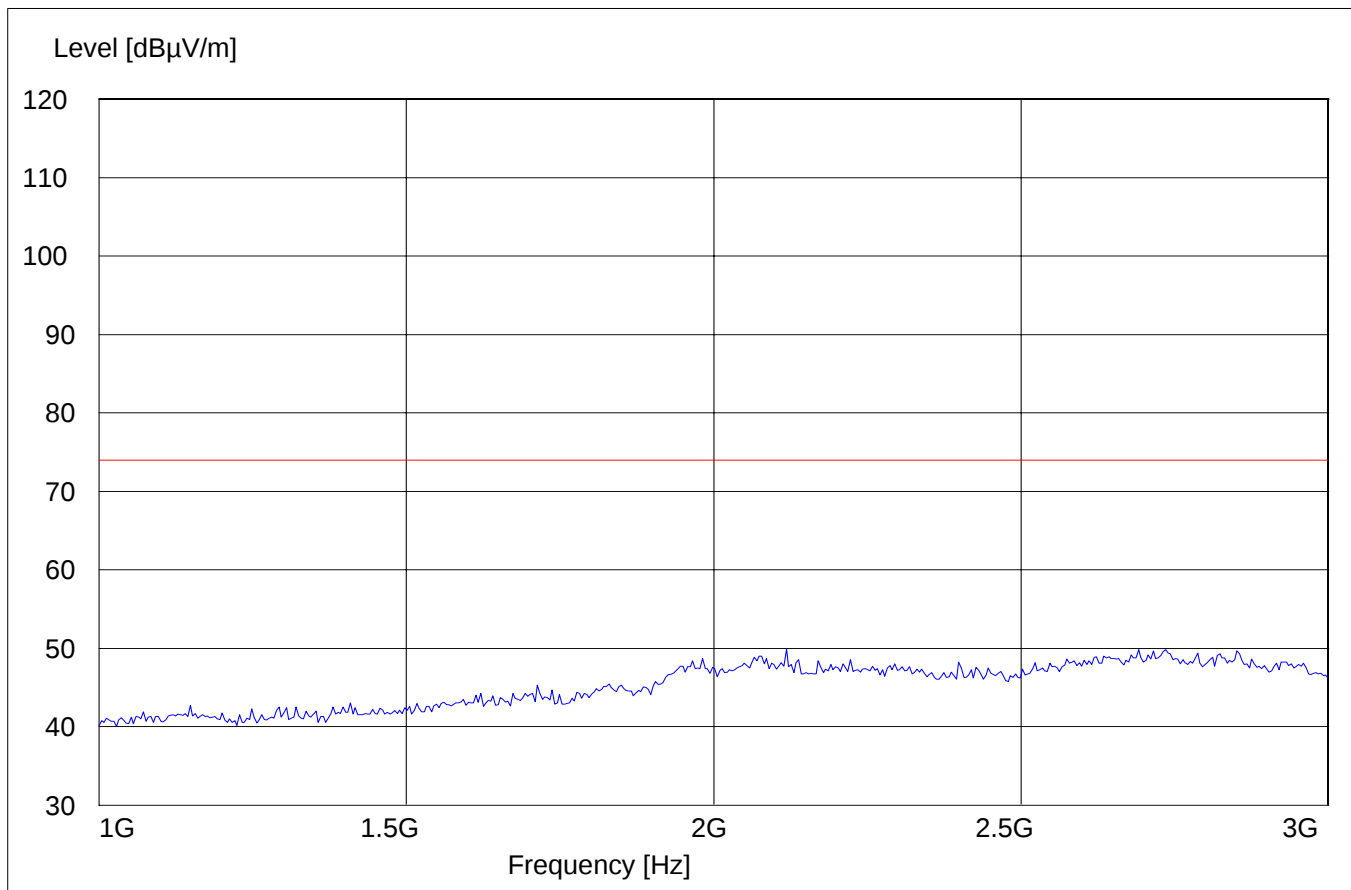

## RECEIVER SPURIOUS RADIATION 3GHz – 18GHz

§ 15.209


|                    |           |                             |         |       |                 |
|--------------------|-----------|-----------------------------|---------|-------|-----------------|
| SWEEP TABLE:       |           | "BT Spuri hi 3-18G"         |         |       |                 |
| Short Description: |           | Bluetooth Spurious 3-18 GHz |         |       |                 |
| Start              | Stop      | Detector                    | Meas.   | RBW   | Transducer      |
| Frequency          | Frequency | Time                        | Bandw.  | VBW   |                 |
| 3.0 GHz            | 18.0 GHz  | MaxPeak                     | Coupled | 1 MHz | #326 horn (dBi) |

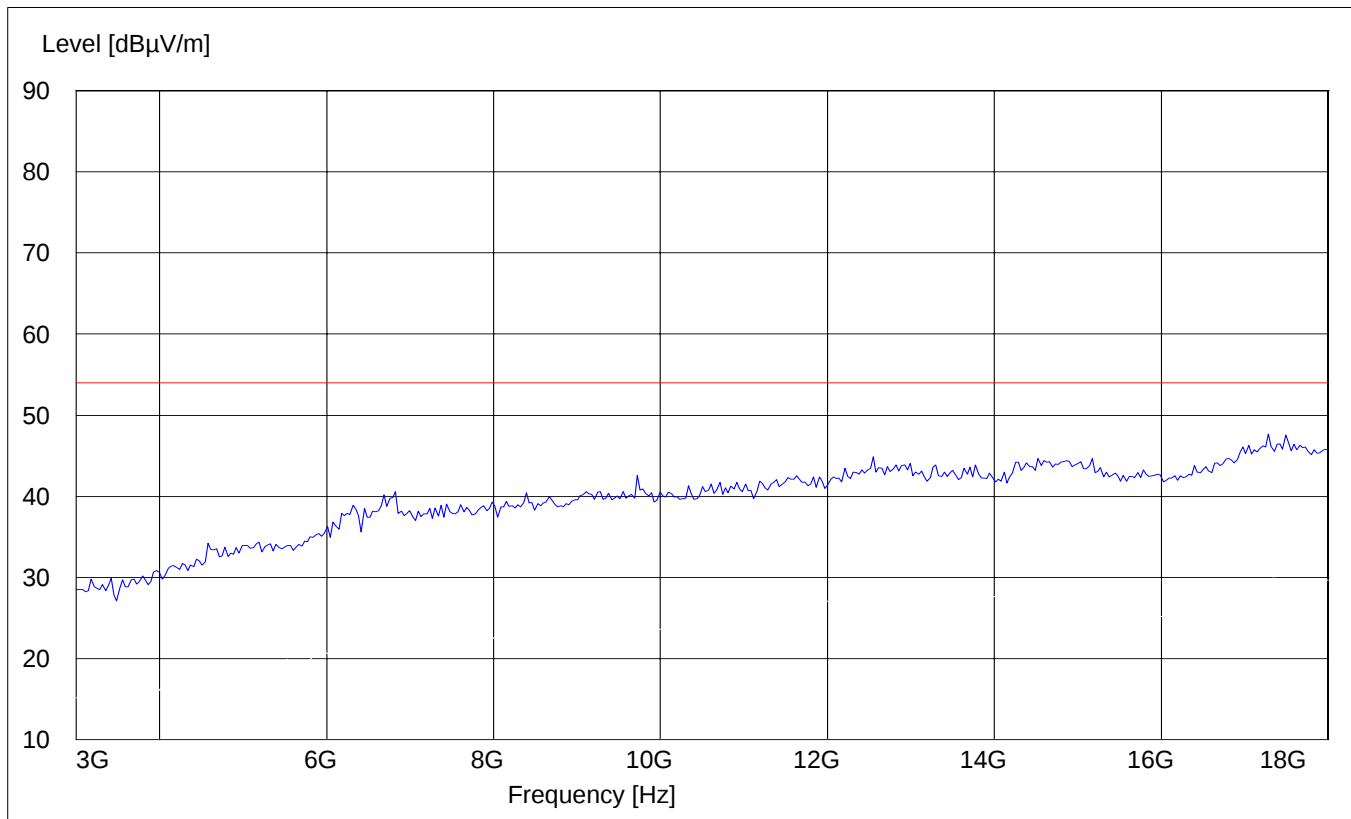

## RECEIVER SPURIOUS RADIATION 18GHz – 26.5GHz

§ 15.209


|                    |           |                               |         |       |                 |
|--------------------|-----------|-------------------------------|---------|-------|-----------------|
| SWEEP TABLE:       |           | "BT Spuri hi 18-26.5G"        |         |       |                 |
| Short Description: |           | Bluetooth Spurious 18-26.5GHz |         |       |                 |
| Start              | Stop      | Detector                      | Meas.   | RBW   | Transducer      |
| Frequency          | Frequency | Time                          | Bandw.  | VBW   |                 |
| 18.0 GHz           | 26.5 GHz  | MaxPeak                       | Coupled | 1 MHz | #326 horn (dBi) |

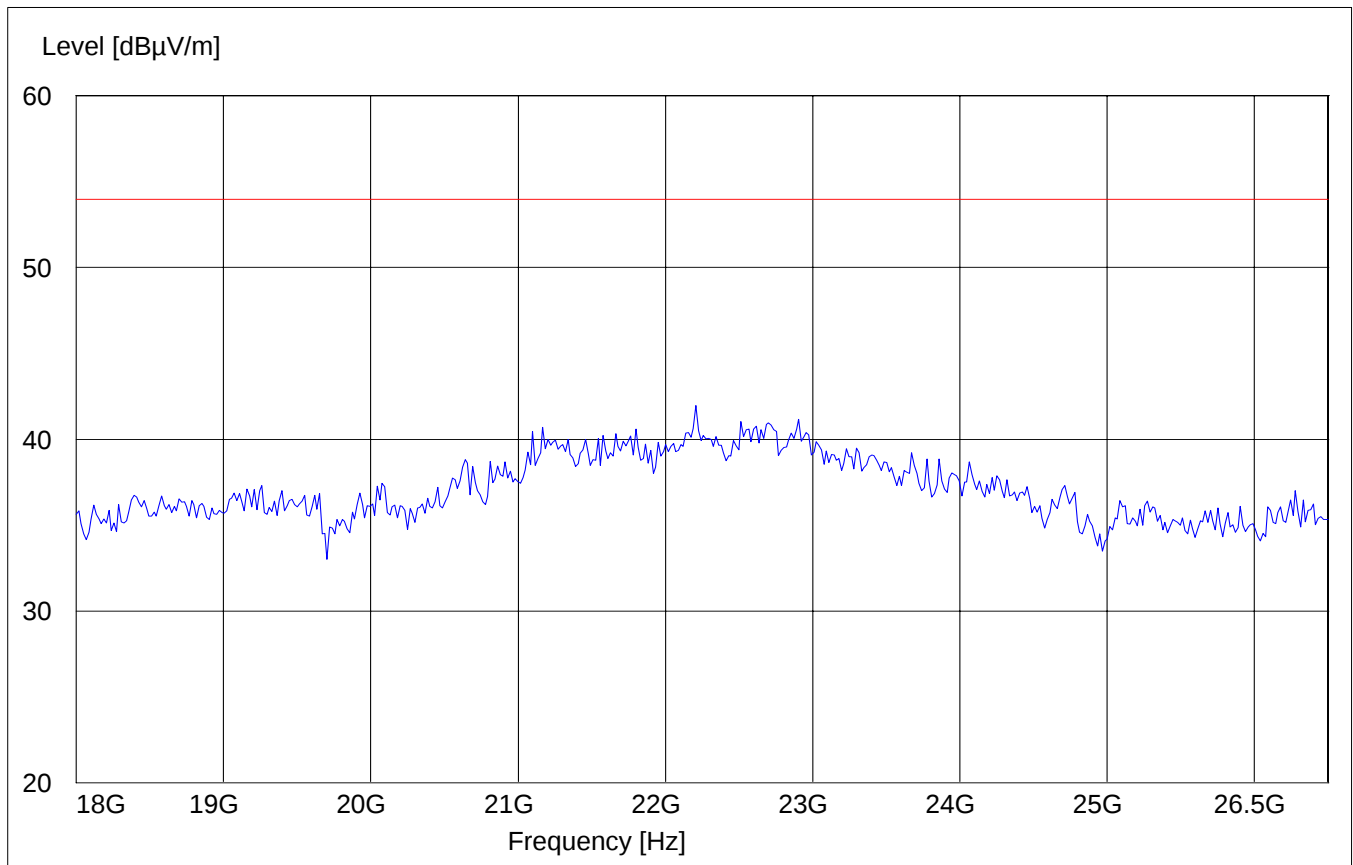

**TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS**

| <b>No</b> | <b>Instrument/Ancillary</b> | <b>Type</b>  | <b>Manufacturer</b> | <b>Serial No.</b> |
|-----------|-----------------------------|--------------|---------------------|-------------------|
| <b>01</b> | Spectrum Analyzer           | ESIB 40      | Rohde & Schwarz     | 100107            |
| <b>02</b> | Spectrum Analyzer           | FSEM 30      | Rohde & Schwarz     | 826880/010        |
| <b>03</b> | Biconilog Antenna           | 3141         | EMCO                | 0005-1186         |
| <b>04</b> | Horn Antenna (700M-18GHz)   | SAS-200/571  | AH Systems          | 325               |
| <b>05</b> | Horn Antenna (18-26.5GHz)   | 3160-09      | EMCO                | 1240              |
| <b>06</b> | 2-3GHz Band reject filter   | BRM50701     | Microtronics        | 6                 |
| <b>07</b> | Pre-Amplifier               | TS-ANA       | Rohde & Schwarz     | --                |
| <b>08</b> | Pre-Amplifier               | JS4-00102600 | Miteq               | 00616             |

**BLOCK DIAGRAMS**  
**Conducted Testing**

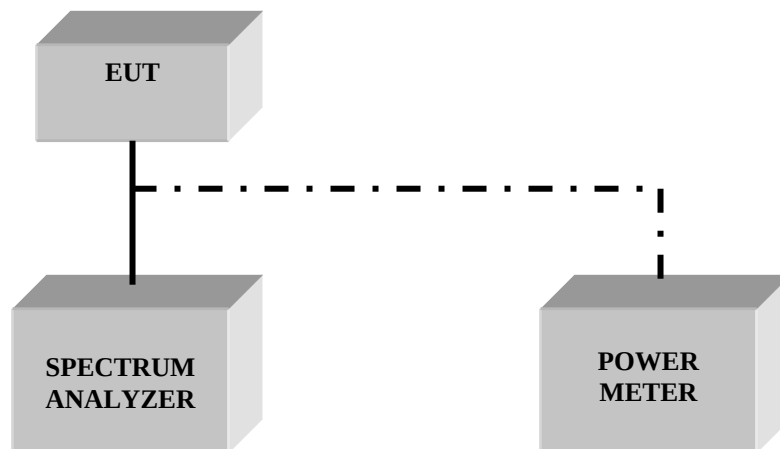

## Radiated Testing

### ANECHOIC CHAMBER

