



FCC RF Test Report

APPLICANT : Motorola Mobility LLC
EQUIPMENT : Mobile Cellular Phone
BRAND NAME : Motorola
MODEL NAME : 10808
FCC ID : IHDT56WJ2
STANDARD : 47 CFR Part 2, 22(H), 27(M)
CLASSIFICATION : PCS Licensed Transmitter Held to Ear (PCE)

This is a data re-used report which is only valid together with the original test report. The product was received on Mar. 08, 2017 and completely tested on Apr. 18, 2017. We, Sporton International (KunShan) INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI / TIA / EIA-603-D-2010 and the testing has shown the tested sample to be in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (KunShan) INC., the test report shall not be reproduced except in full.

Prepared by: James Huang / Manager



Approved by: Jones Tsai / Manager

Sporton International (KunShan) INC.
No.3-2, Pingxiang Road, Kunshan Development Zone, Jiangsu, China



TABLE OF CONTENTS

1 GENERAL DESCRIPTION 5
1.1 Applicant 5
1.2 Manufacturer 5
1.3 Product Feature of Equipment Under Test 5
1.4 Product Specification of Equipment Under Test 6
1.5 Component List 7
1.6 Specification of Accessory 8
1.7 Re-use of Measured Data 9
1.8 Modification of EUT 10
1.9 Maximum ERP/EIRP Power, Frequency Tolerance, and Emission Designator 10
1.10 Testing Location 12
1.11 Applicable Standards 12
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST 13
2.1 Test Mode 13
2.2 Connection Diagram of Test System 15
2.3 Support Unit used in test configuration and system 15
2.4 Measurement Results Explanation Example 15
2.5 Frequency List of Low/Middle/High Channels 16
3 CONDUCTED TEST ITEMS 18
3.1 Measuring Instruments 18
3.2 Test Setup 18
3.3 Test Result of Conducted Test 18
3.4 Conducted Output Power and ERP/EIRP 19
3.5 Peak-to-Average Ratio 20
3.6 Occupied Bandwidth 21
3.7 Conducted Band Edge 22
3.8 Conducted Spurious Emission 24
3.9 Frequency Stability 25
4 RADIATED TEST ITEMS 26
4.1 Measuring Instruments 26
4.2 Test Setup 26
4.3 Test Result of Radiated Test 26
4.4 Radiated Spurious Emission 27
5 LIST OF MEASURING EQUIPMENT 28
6 UNCERTAINTY OF EVALUATION 29

APPENDIX A. TEST RESULTS OF CONDUCTED TEST

APPENDIX B. TEST RESULTS OF RADIATED TEST

APPENDIX C. TEST SETUP PHOTOGRAPHS

APPENDIX D. REFERENCE REPORT



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FG730825-01B	Rev. 01	Initial issue of report	May 23, 2017



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.4	§2.1046	Conducted Output Power	Reporting Only	PASS	-
	§22.913(a)(2)	Effective Radiated Power (Band 5) (Band 26)	ERP < 7 Watt	PASS	-
	§27.50(h)(2)	Equivalent Isotropic Radiated Power (Band 38) (Band 41)	EIRP < 2Watt	PASS	-
3.5	N/A	Peak-to-Average Ratio	<13 dB	PASS	-
3.6	§2.1049	Occupied Bandwidth	Reporting Only	PASS	-
3.7	§2.1051 §22.917(a)	Conducted Band Edge Measurement (Band 5) (Band 26)	< 43+10log ₁₀ (P[Watts])	PASS	-
	§27.53(m)(4)	Conducted Band Edge Measurement (Band 38) (Band 41)	§27.53(m)(4)		
3.8	§2.1051 §22.917(a)	Conducted Spurious Emission (Band 5)(Band 26)	< 43+10log ₁₀ (P[Watts])	PASS	-
	§2.1051 §27.53(m)(4)	Conducted Spurious Emission (Band 38)(Band 41)	< 55+10log ₁₀ (P[Watts])		
3.9	§2.1055 §22.355	Frequency Stability Temperature & Voltage	< 2.5 ppm for Part 22H	PASS	-
	§2.1055 §27.54		Within Authorized Band		
4.4	§2.1053 §22.917(a)	Radiated Spurious Emission (Band 5)(Band 26)	< 43+10log ₁₀ (P[Watts])	PASS	Under limit 18.16 dB at 7772.000 MHz
	§2.1053 §27.53(m)(4)	Radiated Spurious Emission (Band 38)(Band 41)	< 55+10log ₁₀ (P[Watts])		



1 General Description

1.1 Applicant

Motorola Mobility LLC
222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

1.2 Manufacturer

Motorola Mobility LLC
222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Cellular Phone
Brand Name	Motorola
Model Name	10808
FCC ID	IHDT56WJ2
EUT supports Radios application	GSM/GPRS/EGPRS/WCDMA/HSPA/ HSPA+(16QAM uplink is not supported)/DC-HSDPA/LTE/NFC WLAN2.4GHz 802.11b/g/n HT20/ WLAN5GHz 802.11a/n HT20/HT40/ Bluetooth v3.0 + EDR/Bluetooth v4.0 LE Bluetooth v4.1 LE/ Bluetooth v4.2 LE
IMEI Code	Conducted: 351894080019137/351894080019145 for LTE Band 5 / 38 351894080019210/351894080019228 for LTE Band 26 / 41 Radiation: 351894080017271/351894080017289
HW Version	DVT2
SW Version	montana_n-userdebug 7.1.1 NPP26.56 1473 intcfg,test-keys
EUT Stage	Identical Prototype



1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx Frequency	LTE Band 5 : 824.7 MHz ~ 848.3 MHz LTE Band 7 : 2502.5 MHz ~ 2567.5 MHz LTE Band 26 : 824.7MHz ~ 848.3 MHz LTE Band 38 : 2572.5MHz ~ 2617.5MHz LTE Band 41 : 2547.5 MHz ~ 2652.5 MHz
Rx Frequency	LTE Band 5 : 869.7 MHz ~ 893.3 MHz LTE Band 7 : 2622.5 MHz ~ 2687.5 MHz LTE Band 26 : 869.7 MHz ~ 893.3 MHz LTE Band 38 : 2572.5 MHz ~ 2617.5 MHz LTE Band 41 : 2547.5 MHz ~ 2652.5 MHz
Bandwidth	LTE Band 5 : 1.4MHz / 3MHz / 5MHz / 10MHz LTE Band 7 : 5MHz / 10MHz / 15MHz / 20MHz LTE Band 26 : 1.4MHz / 3MHz / 5MHz / 10MHz / 15MHz LTE Band 38 : 5MHz / 10MHz / 15MHz / 20MHz LTE Band 41 : 5MHz / 10MHz / 15MHz / 20MHz
Maximum Output Power to Antenna	LTE Band 5 : 23.55 dBm LTE Band 26 : 23.35 dBm LTE Band 38 : 23.65 dBm LTE Band 41 : 23.69 dBm
Antenna Gain	LTE Band 5 : -1.01 dBi LTE Band 26 : -1.01 dBi LTE Band 38 : -1.78 dBi LTE Band 41 : -1.77 dBi
Type of Modulation	QPSK / 16QAM



1.5 Component List

Note: There are two types of EUT, the details refer the following table. According to the difference, we choose sample 1 to perform full test

Component	Sample 1	Sample 2
CPU	Qualcomm MSM-8937-4-727NSP-TR-00-1-AA	Qualcomm MSM-8937-4-727NSP-TR-00-1-AA
TLCM	Tianma TL052VVMP09-00/TL052VVMP13-00	Mutto 1010-0502-00009/1010-0502-00010
Memory	Samsung KMRX1000BM-B614	Hynix H9TQ26ACLTMCUR-KUM
Front Camera	sunny D5V16C-0JG	O-film L5695F70
Back Camera	sunny AL6S05S-0JG	Q-tech F3P3MBK
Battery	ATL SB18C15119	Sunwoda SB18C15118



1.6 Specification of Accessory

Specification of Accessory			
AC Adapter 1	Brand Name	Motorola(Salom)	Model Name SC-22
	Power Rating	I/P: 100-240Vac, 500mA, O/P: 5Vdc or 9Vdc or 12Vdc, 3000mA or 1600mA or 1200mA	
AC Adapter 2	Brand Name	Motorola(chenyang)	Model Name SC-22
	Power Rating	I/P: 100-240Vac, 500mA, O/P: 5Vdc or 9Vdc or 12Vdc, 3000mA or 1600mA or 1200mA	
AC Adapter 3	Brand Name	Motorola(LiteOn)	Model Name SC-22
	Power Rating	I/P: 100-240Vac, 500mA, O/P: 5Vdc or 9Vdc or 12Vdc, 3000mA or 1600mA or 1200mA	
Battery 1	Brand Name	Motorola (ATL)	Model Name SB18C15119
	Power Rating	3.8Vdc,3000mAh	Type Li-ion
Battery 2	Brand Name	Motorola (sunwoda)	Model Name SB18C15118
	Power Rating	3.8Vdc,3000mAh	Type Li-ion
Earphone 1	Brand Name	Motorola(Lian chuang)	Model Name SJYN1181B
	Signal Line Type	1.2 meter, non-shielded cable, without ferrite core	
Earphone 2	Brand Name	Motorola(Lianyun)	Model Name TS500-03AMS01WHR-M
	Signal Line Type	1.2 meter, non-shielded cable, without ferrite core	
Earphone 3	Brand Name	Motorola(Tianzhi)	Model Name TJ101817
	Signal Line Type	1.2 meter, non-shielded cable, without ferrite core	
USB Cable 1	Brand Name	Motorola(Liqi)	Model Name L25W-051000100AL
	Signal Line Type	1.0 meter, shielded cable, without core	
USB Cable 2	Brand Name	Motorola(Fukangyuan)	Model Name F25W-051000100A
	Signal Line Type	1.0 meter, shielded cable, without core	



1.7 Re-use of Measured Data

1.7.1 Introduction Section

This application re-uses data collected on a similar device. The subject device of this application (Model: 10808, FCC ID: IHDT56WJ2) is electrically identical to the reference device (Model: 10807, 11154, FCC ID: IHDT56WJ4) for the portions of the circuitry corresponding to the data being re-used, as treated by KDB Publication 178919 D01.

1.7.2 Difference Section

For details concerning the similarity with respect to component placement, mechanical/electrical design etc., some difference of population/depoulation to enable support of different cellular bands, please refer to the Operational Description.

The re-used RF data includes the following bands provided in Appendix D (Sporton RF Report No. FG730825-02B for the reference device Model: 10807, 11154, FCC ID: IHDT56WJ4):

1.7.3 Spot Check Verification Data Section

In order to confirm hardware similarity of the subject device with the reference device, spot check measurements were performed on the subject device for radiated spurious emission, Conducted Band-edge and Conducted spurious emission, the test result were consistent with FCC ID: IHDT56WJ4. And added LTE Band 26/38/41 to full test and re-test LTE Band 5

Assertions concerning the similarity of these devices are based on representations by the applicant. The applicant accepts full responsibility for the validity of the similarity claim, and for the determination that verification test data are sufficient to support it.

1.7.4 Reference detail Section:

Equipment Class	Reference FCC ID	Folder Test/RF Exposure	Report Title/Section
PCE (LTE)	IHDT56WJ4	Part22H.24E.27L.27M.27H (FG730825-02B)	All sections applicable For LTE Band 7



1.8 Modification of EUT

No modifications are made to the EUT during all test items.

1.9 Maximum ERP/EIRP Power, Frequency Tolerance, and Emission Designator

LTE Band 5		QPSK			16QAM		
BW (MHz)	Frequency Range (MHz)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum ERP(W)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum ERP(W)
1.4	824.7 ~ 848.3	1M09G7D	-	0.1057	1M09W7D	-	0.0787
3	825.5 ~ 847.5	2M72G7D	-	0.1026	2M73W7D	-	0.0780
5	826.5 ~ 846.5	4M50G7D	-	0.1040	4M50W7D	-	0.0811
10	829.0 ~ 844.0	9M03G7D	0.0072	0.1094	9M05W7D	-	0.0815
LTE Band 26		QPSK			16QAM		
BW (MHz)	Frequency Range (MHz)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum ERP(W)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum ERP(W)
1.4	824.7 ~ 848.3	1M10G7D	-	0.1033	1M10W7D	-	0.0773
3	825.5 ~ 847.5	2M72G7D	-	0.0973	2M72W7D	-	0.0798
5	826.5 ~ 846.5	4M51G7D	-	0.1026	4M50W7D	-	0.0824
10	829.0 ~ 844.0	9M07G7D	0.0117	0.1023	9M09W7D	-	0.0805
15	831.5 ~ 841.5	13M5G7D	-	0.1045	13M4W7D	-	0.0871
CH26765	821.5	13M4G7D	-	0.1047	13M4W7D	-	0.0885



LTE Band 38		QPSK			16QAM		
BW (MHz)	Frequency Range (MHz)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)
5	2572.5 ~ 2617.5	4M49G7D	-	0.1466	4M51W7D	-	0.1114
10	2575.0 ~ 2615.0	9M01G7D	0.0017	0.1486	9M01W7D	-	0.1159
15	2577.5 ~ 2612.5	13M5G7D	-	0.1538	13M5W7D	-	0.1148
20	2580.0 ~ 2610.0	18M4G7D	-	0.1452	18M4W7D	-	0.1109
LTE Band 41		QPSK			16QAM		
BW (MHz)	Frequency Range (MHz)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)
5	2547.5 ~ 2652.5	4M50G7D	-	0.1521	4M50W7D	-	0.1117
10	2550.0 ~ 2650.0	9M15G7D	0.0026	0.1531	9M05W7D	-	0.1161
15	2552.5 ~ 2647.5	13M5G7D	-	0.1552	13M5W7D	-	0.1161
20	2555.0 ~ 2645.0	18M4G7D	-	0.1556	18M3W7D	-	0.1159



1.10 Testing Location

Test Site	Sporton International (KunShan) INC.		
Test Site Location	No.3-2, Pingxiang Road, Kunshan Development Zone, Jiangsu, China TEL: +86-0512-5790-0158 FAX: +86-0512-5790-0958		
Test Site No.	Sporton Site No.		FCC Registration No.
	TH01-KS	03CH03-KS	306251

Note: The test site complies with ANSI C63.4 2014 requirement.

1.11 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 2, 22(H), 27(M)
- ♦ ANSI / TIA / EIA-603-D-2010
- ♦ FCC KDB 971168 D01 Power Meas. License Digital Systems v02r02
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

2.1 Test Mode

Antenna port conducted and radiated test items listed below are performed according to KDB 971168 D01 Power Meas. License Digital Systems v02r02 with maximum output power.


Radiated measurements are performed by rotating the EUT in three different orthogonal test planes to find the maximum emission.

Test Items	Band	Bandwidth (MHz)						Modulation		RB #			Test Channel		
		1.4	3	5	10	15	20	QPSK	16QAM	1	Half	Full	L	M	H
Max. Output Power	5	Y	Y	Y	Y	-	-	Y	Y	Y	Y	Y	Y	Y	Y
	38	-	-	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y
	26	Y	Y	Y	Y	Y	-	Y	Y	Y	Y	Y	Y	Y	Y
	41	-	-	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y
Peak-to-Average Ratio	5				Y	-	-	Y	Y	Y		Y	Y	Y	Y
	38	-	-				Y	Y	Y	Y		Y	Y	Y	Y
	26					Y	-	Y	Y	Y		Y	Y	Y	Y
	41	-	-				Y	Y	Y	Y		Y	Y	Y	Y
26dB and 99% Bandwidth	5	Y	Y	Y	Y	-	-	Y	Y			Y	Y	Y	Y
	38	-	-	Y	Y	Y	Y	Y	Y			Y	Y	Y	Y
	26	Y	Y	Y	Y	Y	-	Y	Y			Y	Y	Y	Y
	41	-	-	Y	Y	Y	Y	Y	Y			Y	Y	Y	Y
Conducted Band Edge	5	Y	Y	Y	Y	-	-	Y	Y	Y		Y	Y		Y
	38	-	-	Y	Y	Y	Y	Y	Y	Y		Y	Y		Y
	26	Y	Y	Y	Y	Y	-	Y	Y	Y		Y	Y		Y
	41	-	-	Y	Y	Y	Y	Y	Y	Y		Y	Y		Y



Test Items	Band	Bandwidth (MHz)						Modulation		RB #			Test Channel		
		1.4	3	5	10	15	20	QPSK	16QAM	1	Half	Full	L	M	H
Conducted Spurious Emission	5	v	v	v	v	-	-	v	v	v			v	v	v
	38	-	-	v	v	v	v	v	v	v			v	v	v
	26	v	v	v	v	v	-	v	v	v			v	v	v
	41	-	-	v	v	v	v	v	v	v			v	v	v
Frequency Stability	5				v	-	-	v				v		v	
	38	-	-		v			v				v		v	
	26				v		-	v				v		v	
	41	-	-		v			v				v		v	
E.R.P/ E.I.R.P.	5	v	v	v	v	-	-	v	v	v			v	v	v
	38	-	-	v	v	v	v	v	v	v			v	v	v
	26	v	v	v	v	v	-	v	v	v			v	v	v
	41	-	-	v	v	v	v	v	v	v			v	v	v
Radiated Spurious Emission	5	v	v	v	v	-	-	v		v				v	
	38	-	-	v	v	v	v	v		v				v	
	26	v	v	v	v	v	-	v		v				v	
	41	-	-	v	v	v	v	v		v				v	
Note	<p>1. The mark “v” means that this configuration is chosen for testing</p> <p>2. The mark “-“ means that this bandwidth is not supported.</p> <p>3. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported.</p>														

2.2 Connection Diagram of Test System

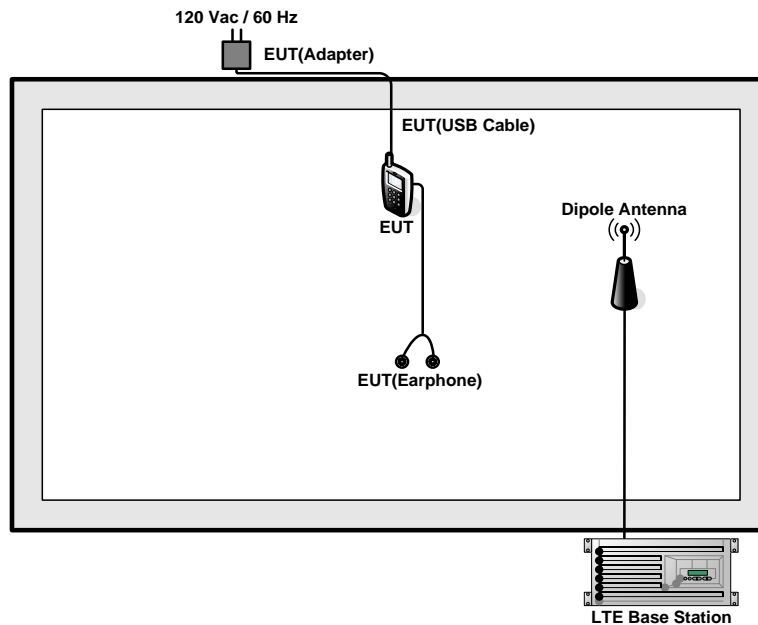

2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	Power Supply	GWINSTEK	PSS-2002	N/A	N/A	Unshielded, 1.8 m
2.	LTE Base Station	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss.

$Offset = RF\ cable\ loss$

Following shows an offset computation example with cable loss 4.5 dB

$$Offset\ (dB) = RF\ cable\ loss\ (dB).$$

$$= 4.5\ (dB)$$



2.5 Frequency List of Low/Middle/High Channels

LTE Band 5 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
10	Channel	20450	20525	20600
	Frequency	829	836.5	844
5	Channel	20425	20525	20625
	Frequency	826.5	836.5	846.5
3	Channel	20415	20525	20635
	Frequency	825.5	836.5	847.5
1.4	Channel	20407	20525	20643
	Frequency	824.7	836.5	848.3

LTE Band 26 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
15	Channel	26865	26915	26965
	Frequency	831.5	836.5	841.5
10	Channel	26840	26915	26990
	Frequency	829	836.5	844
5	Channel	26815	26915	27015
	Frequency	826.5	836.5	846.5
3	Channel	26805	26915	27025
	Frequency	825.5	836.5	847.5
1.4	Channel	26797	26915	27033
	Frequency	824.7	836.5	848.3



LTE Band 38 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	37850	38000	38150
	Frequency	2580	2595	2610
15	Channel	37825	38000	38175
	Frequency	2577.5	2595	2612.5
10	Channel	37800	38000	38200
	Frequency	2575	2595	2615
5	Channel	37775	38000	38225
	Frequency	2572.5	2595	2617.5

LTE Band 41 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	40240	40690	41140
	Frequency	2555	2600	2645
15	Channel	40215	40690	41165
	Frequency	2552.5	2600	2647.5
10	Channel	40190	40690	41190
	Frequency	2550	2600	2650
5	Channel	40165	40690	41215
	Frequency	2547.5	2600	2652.5

3 Conducted Test Items

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.2 Test Setup


3.2.1 Conducted Output Power



3.2.2 Peak-to-Average Ratio, Occupied Bandwidth ,Conducted Band-Edge and Conducted Spurious Emission

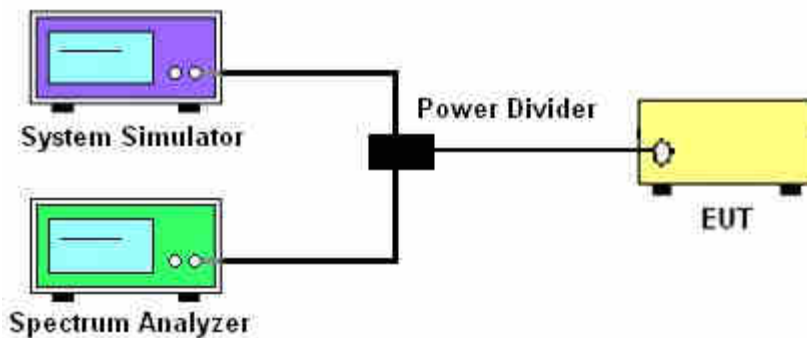

3.2.3 Frequency Stability

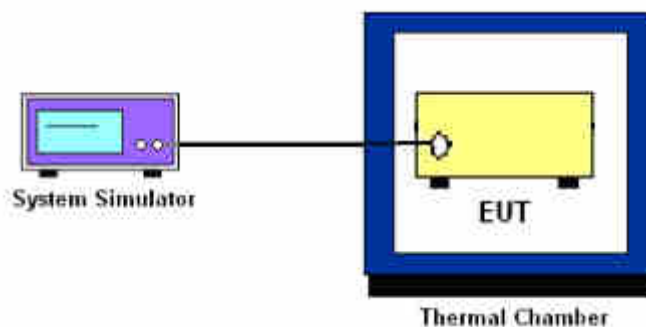

3.3 Test Result of Conducted Test

Please refer to Appendix A.



3.4 Conducted Output Power and ERP/EIRP

3.4.1 Description of the Conducted Output Power Measurement and ERP/EIRP Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to force the EUT transmitting at maximum output power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The ERP of mobile transmitters must not exceed 7 Watts for LTE Band 5 and Band 26.

The EIRP of mobile transmitters must not exceed 2 Watts for LTE Band 38 and Band 41.

According to KDB 412172 D01 Power Approach,

$EIRP = P_T + G_T - L_C$, $ERP = EIRP - 2.15$, where

P_T = transmitter output power in dBm

G_T = gain of the transmitting antenna in dBi

L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB

3.4.2 Test Procedures

1. The transmitter output port was connected to the system simulator.
2. Set EUT at maximum power through the system simulator.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure and record the power level from the system simulator.



3.5 Peak-to-Average Ratio

3.5.1 Description of the PAR Measurement

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.5.2 Test Procedures

1. The testing follows FCC KDB 971168 v02r02 Section 5.7.1.
2. The EUT was connected to spectrum and system simulator via a power divider.
3. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
4. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
5. Record the deviation as Peak to Average Ratio.



3.6 Occupied Bandwidth

3.6.1 Description of Occupied Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.6.2 Test Procedures

1. The testing follows FCC KDB 971168 v02r02 Section 4.2.
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
4. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
5. Set the detection mode to peak, and the trace mode to max hold.
6. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.
(this is the reference value)
7. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
8. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
9. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.



3.7 Conducted Band Edge

3.7.1 Description of Conducted Band Edge Measurement

22.917(a)

For operations in the 824 – 849 MHz band, the FCC limit is $43 + 10\log_{10}(P[\text{Watts}])$ dB below the transmitter power $P(\text{Watts})$ in a 100kHz bandwidth. However, in the 1MHz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

27.53(m)(4)

For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less that $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.



3.7.2 Test Procedures

1. The testing follows FCC KDB 971168 v02r02 Section 6.0.
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The band edges of low and high channels for the highest RF powers were measured.
4. Set RBW \geq 1% EBW in the 1MHz band immediately outside and adjacent to the band edge.
5. Beyond the 1 MHz band from the band edge, RBW=1MHz was used.
6. Set spectrum analyzer with RMS detector.
7. Offset has included the duty factor for LTE Band 38/41. Duty factor = $10 \log (1/x)$, where x is the measured duty cycle.
8. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
9. Checked that all the results comply with the emission limit line.

Example:

The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)

$$= P(W) - [43 + 10\log(P)] \text{ (dB)}$$

$$= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)} = -13\text{dBm.}$$

10. For LTE Band 38, 41, the other 40 dB, and 55 dB have additionally applied same calculation above.



3.8 Conducted Spurious Emission

3.8.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

For Band 38,41:

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $55 + 10 \log (P)$ dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 9kHz up to a frequency including its 10th harmonic.

3.8.2 Test Procedures

1. The testing follows FCC KDB 971168 v02r02 Section 6.0.
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
4. The middle channel for the highest RF power within the transmitting frequency was measured.
5. The conducted spurious emission for the whole frequency range was taken.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz.
7. Set spectrum analyzer with RMS detector.
8. Taking the record of maximum spurious emission.
9. Offset has included the duty factor for LTE Band 38/41. Duty factor = $10 \log (1/x)$, where x is the measured duty cycle
10. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
11. The limit line is derived from $43 + 10 \log (P)$ dB below the transmitter power P(Watts)
= $P(W) - [43 + 10 \log (P)]$ (dB)
= $[30 + 10 \log (P)]$ (dBm) - $[43 + 10 \log (P)]$ (dB)
= -13dBm.
12. For Band 38, 41
The limit line is derived from $55 + 10 \log (P)$ dB below the transmitter power P(Watts)
= $P(W) - [55 + 10 \log (P)]$ (dB)
= $[30 + 10 \log (P)]$ (dBm) - $[55 + 10 \log (P)]$ (dB)
= -25dBm.



3.9 Frequency Stability

3.9.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.

3.9.2 Test Procedures for Temperature Variation

1. The testing follows FCC KDB 971168 v02r02 Section 9.0.
2. The EUT was set up in the thermal chamber and connected with the system simulator.
3. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
4. With power OFF, the temperature was raised in 10°C step up to 50°C . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.9.3 Test Procedures for Voltage Variation

1. The testing follows FCC KDB 971168 v02r02 Section 9.0.
2. The EUT was placed in a temperature chamber at $20\pm 5^{\circ}\text{C}$ and connected with the system simulator.
3. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
4. The variation in frequency was measured for the worst case.


4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.2 Test Setup

4.2.1 For radiated test from 30MHz to 1GHz

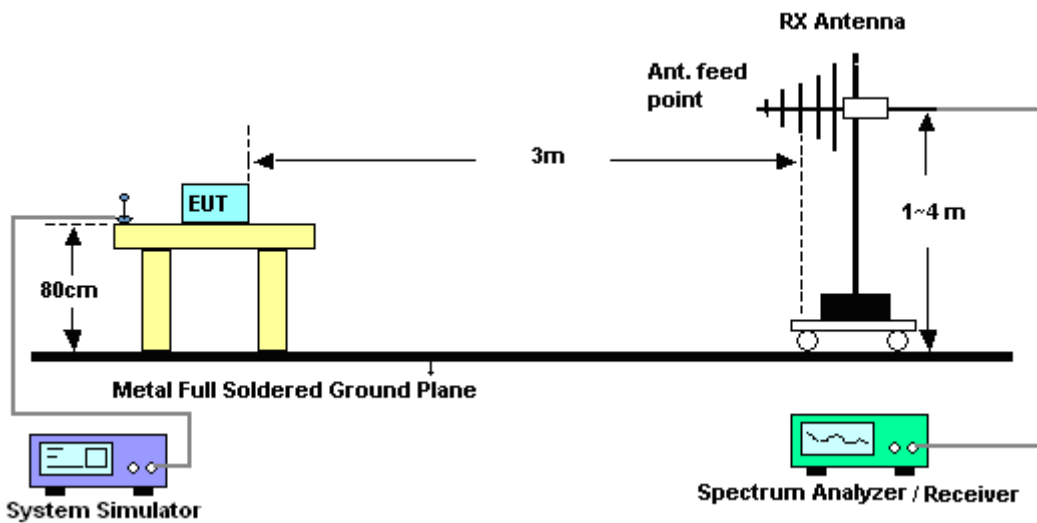

4.2.2 For radiated test above 1GHz

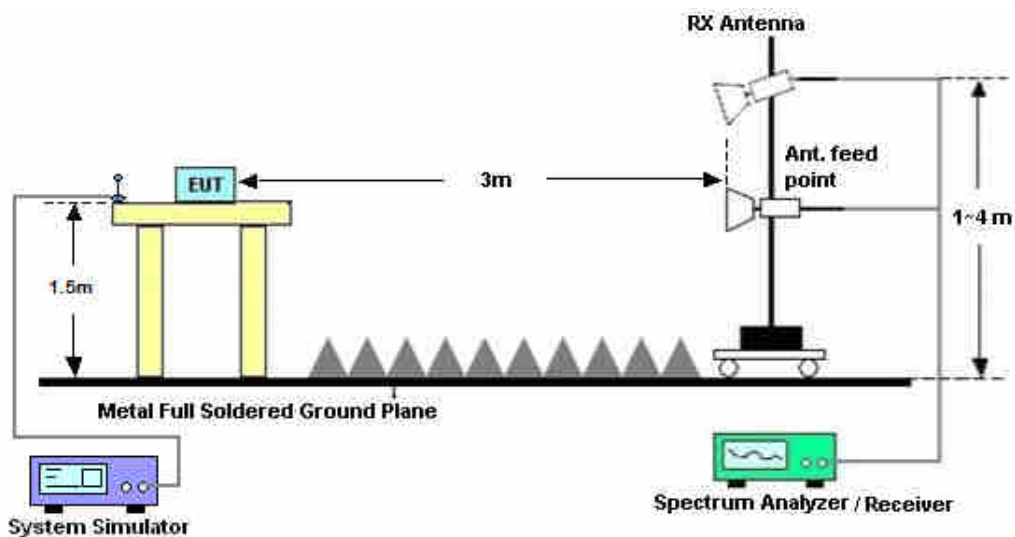

4.3 Test Result of Radiated Test

Please refer to Appendix B.



4.4 Radiated Spurious Emission

4.4.1 Description of Radiated Spurious Emission

The radiated spurious emission was measured by substitution method according to ANSI / TIA / EIA-603-D-2010. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

For Band 38, 41

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $55 + 10 \log (P)$ dB.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.4.2 Test Procedures

1. The testing follows FCC KDB 971168 v02r02 Section 5.8 and ANSI / TIA-603-D-2010 Section 2.2.12.
2. The EUT was placed on a turntable with 0.8 meter height for frequency below 1GHz and 1.5 meter height for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the receiving antenna mounted on the antenna tower.
4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
5. The height of the receiving antenna is varied between 1m to 4m to search the maximum spurious emission for both horizontal and vertical polarizations.
6. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power.
7. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
8. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
9. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
10. $EIRP \text{ (dBm)} = S.G. \text{ Power} - Tx \text{ Cable Loss} + Tx \text{ Antenna Gain}$
11. $ERP \text{ (dBm)} = EIRP - 2.15$
12. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [43 + 10\log(P)] \text{ (dB)}$
 $= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)}$
 $= -13\text{dBm}.$

13. For Band 38, 41:

The limit line is derived from $55 + 10\log(P)$ dB below the transmitter power P(Watts)
 $EIRP \text{ (dBm)} = S.G. \text{ Power} - Tx \text{ Cable Loss} + Tx \text{ Antenna Gain}$
 $ERP \text{ (dBm)} = EIRP - 2.15$



5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Aug. 09, 2016	Mar. 21, 2017~ Apr. 18, 2017	Aug. 08, 2017	Conducted (TH01-KS)
Thermal Chamber	Ten Billion	TTC-B3S	TBN-960502	-40~+150°C	Oct. 13, 2016	Mar. 21, 2017~ Apr. 18, 2017	Oct. 12, 2017	Conducted (TH01-KS)
Radio communication analyzer	Anritsu	MT8820C	6201300652	2G/3G/LTE Band	Aug. 08, 2016	Mar. 21, 2017~ Apr. 18, 2017	Aug. 07, 2017	Conducted (TH01-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55150244	10Hz~44GHz	Apr. 22, 2016	Mar. 20, 2017~ Apr. 12, 2017	Apr. 21, 2017	Radiation (03CH03-KS)
Bilog Antenna	TeseQ	CBL6112D	35406	25MHz~2GHz	Apr. 16, 2016	Mar. 20, 2017~ Apr. 12, 2017	Apr. 15, 2017	Radiation (03CH03-KS)
Horn Antenna	Schwarzbeck	BBHA9120D	9120D-1356	1GHz~18GHz	Apr. 16, 2016	Mar. 20, 2017~ Apr. 12, 2017	Apr. 15, 2017	Radiation (03CH03-KS)
SHF-EHF Horn	Schwarzbeck	BBHA 9170	BBHA170249	15GHz~40GHz	Feb. 15, 2017	Mar. 20, 2017~ Apr. 12, 2017	Feb. 14, 2018	Radiation (03CH03-KS)
Amplifier	SONOMA	310N	187289	9kHz~1GHz	Aug. 09, 2016	Mar. 20, 2017~ Apr. 12, 2017	Aug. 08, 2017	Radiation (03CH03-KS)
Amplifier	Agilent	8449B	3008A02370	1GHz~26.5GHz	Oct. 13, 2016	Mar. 20, 2017~ Apr. 12, 2017	Oct. 12, 2017	Radiation (03CH03-KS)
Amplifier	MITEQ	TTA1840-35-HG	1887435	18GHz~40GHz	Oct. 13, 2016	Mar. 20, 2017~ Apr. 12, 2017	Oct. 12, 2017	Radiation (03CH03-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Mar. 20, 2017~ Apr. 12, 2017	NCR	Radiation (03CH03-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Mar. 20, 2017~ Apr. 12, 2017	NCR	Radiation (03CH03-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Mar. 20, 2017~ Apr. 12, 2017	NCR	Radiation (03CH03-KS)

NCR: No Calibration Required



6 Uncertainty of Evaluation

ncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.8dB
---	-------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.3dB
---	-------



Appendix A. Test Results of Conducted Test

Conducted Output Power(Average power)

LTE Band 5 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
10	1	0	QPSK	22.91	22.99	22.94
10	1	25		23.55	23.20	23.51
10	1	49		23.11	23.00	22.97
10	25	0		22.05	22.15	22.09
10	25	12		22.07	22.13	22.10
10	25	25		21.94	22.13	22.06
10	50	0		22.15	22.06	22.06
10	1	0	16-QAM	21.56	21.35	21.46
10	1	25		22.27	21.51	21.80
10	1	49		21.55	21.61	22.09
10	25	0		21.06	21.18	21.09
10	25	12		21.09	21.04	21.30
10	25	25		21.14	21.12	20.98
10	50	0		21.14	21.06	20.97
5	1	0	QPSK	22.86	22.96	22.94
5	1	12		23.21	23.16	23.33
5	1	24		22.93	23.00	22.99
5	12	0		21.93	22.13	22.00
5	12	7		22.00	22.11	22.11
5	12	13		22.07	22.03	21.98
5	25	0		22.02	21.98	21.97
5	1	0	16-QAM	21.45	22.00	21.47
5	1	12		22.25	21.82	21.77
5	1	24		21.41	21.63	21.26
5	12	0		20.83	21.23	20.80
5	12	7		21.19	21.14	21.22
5	12	13		21.16	20.86	20.99
5	25	0		21.00	21.08	20.96



LTE Band 5 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
3	1	0	QPSK	23.10	23.27	22.98
3	1	8		23.06	23.25	23.05
3	1	14		23.00	23.22	22.80
3	8	0		21.97	22.09	22.08
3	8	4		21.96	22.05	22.03
3	8	7		22.05	22.05	21.97
3	15	0		22.05	22.02	21.99
3	1	0	16-QAM	22.01	22.05	22.02
3	1	8		22.00	22.01	21.78
3	1	14		22.07	22.08	21.34
3	8	0		20.97	21.12	20.76
3	8	4		21.05	21.09	21.09
3	8	7		21.05	21.09	21.04
3	15	0		21.11	21.14	21.10
1.4	1	0	QPSK	23.05	23.10	23.19
1.4	1	3		23.14	23.15	23.18
1.4	1	5		23.11	23.11	23.16
1.4	3	0		23.17	23.17	23.29
1.4	3	1		23.24	23.33	23.40
1.4	3	3		23.28	23.30	23.31
1.4	6	0		21.92	22.02	22.09
1.4	1	0	16-QAM	21.37	21.42	21.55
1.4	1	3		21.62	21.61	21.46
1.4	1	5		21.36	21.32	21.49
1.4	3	0		21.81	21.65	21.85
1.4	3	1		21.90	21.90	22.12
1.4	3	3		21.85	21.87	22.04
1.4	6	0		20.94	20.95	20.81



LTE Band 26 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
15	1	0	QPSK	23.22	22.34	23.06
15	1	37		23.35	22.72	23.25
15	1	74		23.02	22.29	23.06
15	36	0		22.20	21.58	22.17
15	36	20		22.18	21.52	22.19
15	36	39		22.12	21.45	22.18
15	75	0		22.19	21.58	22.20
15	1	0	16-QAM	21.82	21.28	21.72
15	1	37		22.56	21.53	22.24
15	1	74		21.95	21.18	21.69
15	36	0		21.13	20.51	21.15
15	36	20		21.21	20.49	21.19
15	36	39		21.09	20.52	21.17
15	75	0		21.11	20.52	21.15
10	1	0	QPSK	22.38	22.20	22.99
10	1	25		22.59	22.38	23.26
10	1	49		22.68	22.19	22.95
10	25	0		21.63	21.56	22.18
10	25	12		21.52	21.54	22.21
10	25	25		21.58	21.42	22.12
10	50	0		21.61	21.52	22.20
10	1	0	16-QAM	21.10	21.13	21.75
10	1	25		21.25	21.61	22.22
10	1	49		21.07	21.05	21.81
10	25	0		20.74	20.65	21.18
10	25	12		20.61	20.65	21.10
10	25	25		20.67	20.47	21.10
10	50	0		20.79	20.63	21.13



LTE Band 26 Maximum Average Power [dBm]						
5	1	0	QPSK	22.53	22.43	22.90
5	1	12		22.68	22.47	23.27
5	1	24		22.46	22.20	22.83
5	12	0		21.58	21.49	22.13
5	12	7		21.55	21.44	22.08
5	12	13		21.61	21.47	22.19
5	25	0		21.66	21.49	22.12
5	1	0	16-QAM	21.75	21.50	21.66
5	1	12		21.39	21.93	22.32
5	1	24		21.70	21.24	21.65
5	12	0		20.79	20.58	21.08
5	12	7		20.76	20.58	21.18
5	12	13		20.75	20.59	21.09
5	25	0		20.53	20.44	21.10
3	1	0	QPSK	22.56	22.40	22.83
3	1	8		22.72	22.58	23.04
3	1	14		22.55	22.33	22.88
3	8	0		21.67	21.49	22.21
3	8	4		21.62	21.43	22.12
3	8	7		21.68	21.47	22.13
3	15	0		21.61	21.48	22.13
3	1	0	16-QAM	22.18	21.73	22.00
3	1	8		22.15	21.71	21.66
3	1	14		21.07	20.77	21.62
3	8	0		20.64	20.59	21.17
3	8	4		20.68	20.61	21.09
3	8	7		20.69	20.45	21.16
3	15	0		20.69	20.58	21.22



LTE Band 26 Maximum Average Power [dBm]						
1.4	1	0	QPSK	22.54	22.38	23.15
1.4	1	3		22.60	22.43	23.00
1.4	1	5		22.39	22.17	23.01
1.4	3	0		22.58	22.50	23.28
1.4	3	1		22.71	22.55	23.30
1.4	3	3		22.58	22.43	23.21
1.4	6	0		21.64	21.63	22.19
1.4	1	0	16-QAM	21.44	21.59	21.71
1.4	1	3		20.96	21.57	21.92
1.4	1	5		20.89	21.40	22.03
1.4	3	0		21.57	21.35	22.04
1.4	3	1		21.58	21.39	21.95
1.4	3	3		21.46	21.21	21.94
1.4	6	0		20.63	20.38	20.91



LTE Band 38 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
20	1	0	QPSK	23.40	23.09	23.26
20	1	49		23.16	23.17	23.34
20	1	99		23.08	23.02	22.95
20	50	0		22.52	22.47	22.46
20	50	24		22.48	22.46	22.42
20	50	50		22.30	22.42	22.38
20	100	0		22.36	22.41	22.35
20	1	0	16-QAM	22.11	22.09	22.14
20	1	49		22.23	22.22	22.16
20	1	99		22.02	22.06	21.76
20	50	0		21.35	21.43	21.33
20	50	24		21.43	21.45	21.18
20	50	50		21.25	21.30	21.25
20	100	0		21.32	21.39	21.36
15	1	0	QPSK	23.35	23.41	23.40
15	1	37		23.65	23.60	23.20
15	1	74		23.30	23.23	23.15
15	36	0		22.55	22.45	22.38
15	36	20		22.39	22.51	22.39
15	36	39		22.32	22.42	22.27
15	75	0		22.38	22.43	22.37
15	1	0	16-QAM	22.08	22.16	22.11
15	1	37		22.25	22.38	21.99
15	1	74		21.98	22.12	22.02
15	36	0		21.34	21.47	21.38
15	36	20		21.30	21.45	21.31
15	36	39		21.34	21.38	21.22
15	75	0		21.32	21.48	21.38



LTE Band 38 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
10	1	0	QPSK	23.50	23.17	23.08
10	1	25		23.48	23.30	23.24
10	1	49		23.31	23.14	23.00
10	25	0		22.46	22.43	22.34
10	25	12		22.46	22.39	22.42
10	25	25		22.39	22.28	22.31
10	50	0		22.34	22.38	22.43
10	1	0	16-QAM	22.22	22.12	22.11
10	1	25		22.42	22.18	21.96
10	1	49		21.99	22.17	21.78
10	25	0		21.64	21.70	21.42
10	25	12		21.63	21.68	21.55
10	25	25		21.52	21.66	21.56
10	50	0		21.40	21.55	21.37
5	1	0	QPSK	23.30	23.11	23.23
5	1	12		23.44	23.28	23.14
5	1	24		23.18	23.11	22.89
5	12	0		22.45	22.39	22.18
5	12	7		22.50	22.40	22.23
5	12	13		22.34	22.40	22.15
5	25	0		22.40	22.39	22.18
5	1	0	16-QAM	22.25	21.92	21.72
5	1	12		22.24	22.02	22.14
5	1	24		21.90	21.97	21.60
5	12	0		21.42	21.27	21.15
5	12	7		21.45	21.47	21.31
5	12	13		21.40	21.38	21.14
5	25	0		21.56	21.53	21.06



LTE Band 41 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
20	1	0	QPSK	23.41	22.93	23.13
20	1	49		23.69	23.08	23.17
20	1	99		23.44	22.68	22.80
20	50	0		22.58	21.80	22.13
20	50	24		22.57	22.02	22.15
20	50	50		22.56	21.91	22.04
20	100	0		22.59	21.98	22.11
20	1	0	16-QAM	22.34	21.78	21.92
20	1	49		22.41	21.87	21.92
20	1	99		21.96	21.38	21.51
20	50	0		21.50	21.02	20.99
20	50	24		21.60	21.02	21.14
20	50	50		21.52	20.97	21.04
20	100	0		21.54	20.96	20.98
15	1	0	QPSK	23.57	22.95	23.06
15	1	37		23.68	23.00	23.30
15	1	74		23.67	22.81	22.92
15	36	0		22.64	21.92	22.10
15	36	20		22.7	21.98	22.29
15	36	39		22.58	21.93	22.03
15	75	0		22.58	22.02	22.06
15	1	0	16-QAM	22.20	21.86	21.89
15	1	37		22.18	21.96	21.72
15	1	74		22.42	21.52	21.48
15	36	0		21.50	21.02	21.01
15	36	20		21.60	20.99	21.05
15	36	39		21.59	21.03	21.01
15	75	0		21.53	21.24	21.04



LTE Band 41 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
10	1	0	QPSK	23.44	22.94	22.88
10	1	25		23.61	22.98	22.96
10	1	49		23.62	22.91	22.85
10	25	0		22.55	21.90	22.19
10	25	12		22.66	21.92	22.16
10	25	25		22.59	21.96	21.91
10	50	0		22.60	22.06	22.13
10	1	0	16-QAM	22.28	21.93	21.83
10	1	25		22.42	21.99	21.72
10	1	49		22.23	21.56	21.66
10	25	0		21.55	21.13	21.33
10	25	12		21.82	21.23	21.36
10	25	25		21.74	21.19	21.00
10	50	0		21.59	21.08	21.05
5	1	0	QPSK	23.38	23.02	22.89
5	1	12		23.59	23.06	23.02
5	1	24		23.42	22.90	22.86
5	12	0		22.54	21.82	22.10
5	12	7		22.62	21.98	22.09
5	12	13		22.54	21.99	21.98
5	25	0		22.50	22.05	22.07
5	1	0	16-QAM	22.04	21.90	21.70
5	1	12		22.25	21.92	22.10
5	1	24		22.03	21.50	21.63
5	12	0		21.29	21.16	21.18
5	12	7		21.48	20.92	21.16
5	12	13		21.38	21.24	20.96
5	25	0		21.50	21.07	21.19



ERP/EIRP

LTE Band 5 (G _T - L _C = -1.01 dB) QPSK									
Bandwidth	1.4M			3M			5M		
Channel	20407	20525	20643	20415	20525	20635	20425	20525	20625
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)
Frequency	824.7	836.5	848.3	825.5	836.5	847.5	826.5	836.5	846.5
(MHz)									
Conducted Power (dBm)	23.24	23.33	23.40	23.10	23.27	22.98	23.21	23.16	23.33
Conducted Power (Watts)	0.2109	0.2153	0.2188	0.2042	0.2123	0.1986	0.2094	0.2070	0.2153
ERP(dBm)	20.08	20.17	20.24	19.94	20.11	19.82	20.05	20.00	20.17
ERP(Watts)	0.1019	0.1040	0.1057	0.0986	0.1026	0.0959	0.1012	0.1000	0.1040

LTE Band 5 (G _T - L _C = -1.01 dB) QPSK			
Bandwidth	10M		
Channel	20450	20525	20600
	(Low)	(Mid)	(High)
Frequency	829	836.5	844
(MHz)			
Conducted Power (dBm)	23.55	23.20	23.51
Conducted Power (Watts)	0.2265	0.2089	0.2244
ERP(dBm)	20.39	20.04	20.35
ERP(Watts)	0.1094	0.1009	0.1084



LTE Band 5 ($G_T - L_C = -1.01$ dB) 16QAM									
Bandwidth	1.4M			3M			5M		
Channel	20407	20525	20643	20415	20525	20635	20425	20525	20625
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)
Frequency (MHz)	824.7	836.5	848.3	825.5	836.5	847.5	826.5	836.5	846.5
Conducted Power (dBm)	21.90	21.90	22.12	22.07	22.08	21.34	22.25	21.82	21.77
Conducted Power (Watts)	0.1549	0.1549	0.1629	0.1611	0.1614	0.1361	0.1679	0.1521	0.1503
ERP(dBm)	18.74	18.74	18.96	18.91	18.92	18.18	19.09	18.66	18.61
ERP(Watts)	0.0748	0.0748	0.0787	0.0778	0.0780	0.0658	0.0811	0.0735	0.0726

LTE Band 5 ($G_T - L_C = -1.01$ dB) 16QAM			
Bandwidth	10M		
Channel	20450	20525	20600
	(Low)	(Mid)	(High)
Frequency (MHz)	829	836.5	844
Conducted Power (dBm)	22.27	21.51	21.80
Conducted Power (Watts)	0.1687	0.1416	0.1514
ERP(dBm)	19.11	18.35	18.64
ERP(Watts)	0.0815	0.0684	0.0731



LTE Band 26 (G _T - L _C = -1.01 dB) QPSK									
Bandwidth	1.4M			3M			5M		
Channel	26797	26915	27033	26805	26915	27025	26815	26915	27015
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)
Frequency	824.7	836.5	848.3	825.5	836.5	847.5	826.5	836.5	846.5
(MHz)									
Conducted Power (dBm)	22.71	22.55	23.30	22.72	22.58	23.04	22.68	22.47	23.27
Conducted Power (Watts)	0.1866	0.1799	0.2138	0.1871	0.1811	0.2014	0.1854	0.1766	0.2123
ERP(dBm)	19.55	19.39	20.14	19.56	19.42	19.88	19.52	19.31	20.11
ERP(Watts)	0.0902	0.0869	0.1033	0.0904	0.0875	0.0973	0.0895	0.0853	0.1026

LTE Band 26 (G _T - L _C = -1.01 dB) QPSK							
Bandwidth	10M			15M			15M
Channel	26840	26915	26990	26865	26915	26965	26765
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)
Frequency	829	836.5	844	831.5	836.5	841.5	821.5
(MHz)							
Conducted Power (dBm)	22.59	22.38	23.26	23.35	22.72	23.25	23.36
Conducted Power (Watts)	0.1816	0.1730	0.2118	0.2163	0.1871	0.2113	0.2168
ERP(dBm)	19.43	19.22	20.10	20.19	19.56	20.09	20.20
ERP(Watts)	0.0877	0.0836	0.1023	0.1045	0.0904	0.1021	0.1047



LTE Band 26 (G _T - L _C = -1.01 dB) 16QAM									
Bandwidth	1.4M			3M			5M		
Channel	26797	26915	27033	26805	26915	27025	26815	26915	27015
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)
Frequency	824.7	836.5	848.3	825.5	836.5	847.5	826.5	836.5	846.5
(MHz)									
Conducted Power (dBm)	21.57	21.35	22.04	22.18	21.73	22.00	21.39	21.93	22.32
Conducted Power (Watts)	0.1435	0.1365	0.1600	0.1652	0.1489	0.1585	0.1377	0.1560	0.1706
ERP(dBm)	18.41	18.19	18.88	19.02	18.57	18.84	18.23	18.77	19.16
ERP(Watts)	0.0693	0.0659	0.0773	0.0798	0.0719	0.0766	0.0665	0.0753	0.0824

LTE Band 26 (G _T - L _C = -1.01 dB) 16QAM							
Bandwidth	10M			15M			15M
Channel	26840	26915	26990	26865	26915	26965	26765
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)
Frequency	829	836.5	844	831.5	836.5	841.5	821.5
(MHz)							
Conducted Power (dBm)	21.25	21.61	22.22	22.56	21.53	22.24	22.63
Conducted Power (Watts)	0.1334	0.1449	0.1667	0.1803	0.1422	0.1675	0.1832
ERP(dBm)	18.09	18.45	19.06	19.40	18.37	19.08	19.47
ERP(Watts)	0.0644	0.0700	0.0805	0.0871	0.0687	0.0809	0.0885



LTE Band 38 (G _T - L _C = -1.78 dB) QPSK			
Bandwidth	5M		
Channel	37775	38000	38225
	(Low)	(Mid)	(High)
Frequency	2572.5	2595	2617.5
(MHz)			
Conducted Power (dBm)	23.44	23.28	23.14
Conducted Power (Watts)	0.2208	0.2128	0.2061
EIRP(dBm)	21.66	21.50	21.36
EIRP(Watts)	0.1466	0.1413	0.1368

LTE Band 38 (G _T - L _C = -1.78 dB) QPSK									
Bandwidth	10M			15M			20M		
Channel	37800	38000	38200	37825	38000	38175	37850	38000	38150
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(Mid)
Frequency	2575	2595	2615	2577.5	2595	2612.5	2580	2595	2610
(MHz)									
Conducted Power (dBm)	23.50	23.17	23.08	23.65	23.60	23.20	23.40	23.09	23.26
Conducted Power (Watts)	0.2239	0.2075	0.2032	0.2317	0.2291	0.2089	0.2188	0.2037	0.2118
EIRP(dBm)	21.72	21.39	21.30	21.87	21.82	21.42	21.62	21.31	21.48
EIRP(Watts)	0.1486	0.1377	0.1349	0.1538	0.1521	0.1387	0.1452	0.1352	0.1406



LTE Band 38 (G _T - L _C = -1.78 dB) 16QAM			
Bandwidth	5M		
Channel	37775	38000	38225
	(Low)	(Mid)	(High)
Frequency	2572.5	2595	2617.5
(MHz)			
Conducted Power (dBm)	22.25	21.92	21.72
Conducted Power (Watts)	0.1679	0.1556	0.1486
EIRP(dBm)	20.47	20.14	19.94
EIRP(Watts)	0.1114	0.1033	0.0986

LTE Band 38 (G _T - L _C = -1.78 dB) 16QAM									
Bandwidth	10M			15M			20M		
Channel	37800	38000	38200	37825	38000	38175	37850	38000	38150
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(Mid)
Frequency	2575	2595	2615	2577.5	2595	2612.5	2580	2595	2610
(MHz)									
Conducted Power (dBm)	22.42	22.18	21.96	22.25	22.38	21.99	22.23	22.22	22.16
Conducted Power (Watts)	0.1746	0.1652	0.1570	0.1679	0.1730	0.1581	0.1671	0.1667	0.1644
EIRP(dBm)	20.64	20.40	20.18	20.47	20.60	20.21	20.45	20.44	20.38
EIRP(Watts)	0.1159	0.1096	0.1042	0.1114	0.1148	0.1050	0.1109	0.1107	0.1091



LTE Band 41 (G _T - L _C = -1.77 dB) QPSK									
Bandwidth	5M			10M			15M		
Channel	40165	40690	41215	40190	40690	41190	40215	40690	41165
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)
Frequency	2547.5	2600	2652.5	2550	2600	2650	2552.5	2600	2647.5
(MHz)									
Conducted Power (dBm)	23.59	23.06	23.02	23.62	22.91	22.85	23.68	23.00	23.30
Conducted Power (Watts)	0.2286	0.2023	0.2004	0.2301	0.1954	0.1928	0.2333	0.1995	0.2138
EIRP(dBm)	21.82	21.29	21.25	21.85	21.14	21.08	21.91	21.23	21.53
EIRP(Watts)	0.1521	0.1346	0.1334	0.1531	0.1300	0.1282	0.1552	0.1327	0.1422

LTE Band 41 (G _T - L _C = -1.77 dB) QPSK			
Bandwidth	20M		
Channel	40240	40690	41140
	(Low)	(Mid)	(High)
Frequency	2555	2600	2645
(MHz)			
Conducted Power (dBm)	23.69	23.08	23.17
Conducted Power (Watts)	0.2339	0.2032	0.2075
EIRP(dBm)	21.92	21.31	21.40
EIRP(Watts)	0.1556	0.1352	0.1380



LTE Band 41 (G _T - L _C = -1.77 dB) 16QAM									
Bandwidth	5M			10M			15M		
Channel	40165	40690	41215	40190	40690	41190	40215	40690	41165
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)
Frequency (MHz)	2547.5	2600	2652.5	2550	2600	2650	2552.5	2600	2647.5
Conducted Power (dBm)	22.25	21.92	22.10	22.42	21.99	21.72	22.42	21.52	21.48
Conducted Power (Watts)	0.1679	0.1556	0.1622	0.1746	0.1581	0.1486	0.1746	0.1419	0.1406
EIRP(dBm)	20.48	20.15	20.33	20.65	20.22	19.95	20.65	19.75	19.71
EIRP(Watts)	0.1117	0.1035	0.1079	0.1161	0.1052	0.0989	0.1161	0.0944	0.0935

LTE Band 41 (G _T - L _C = -1.77dB) 16QAM			
Bandwidth	20M		
Channel	40240	40690	41140
	(Low)	(Mid)	(High)
Frequency (MHz)	2555	2600	2645
Conducted Power (dBm)	22.41	21.87	21.92
Conducted Power (Watts)	0.1742	0.1538	0.1556
EIRP(dBm)	20.64	20.10	20.15
EIRP(Watts)	0.1159	0.1023	0.1035



Peak-to-Average Ratio

Mode	LTE Band 5 / 10MHz				
Mod.	QPSK		16QAM		Limit: 13dB
RB Size	1RB	Full RB	1RB	Full RB	Result
Lowest CH	3.68	5.04	4.49	5.94	PASS
Middle CH	3.86	4.61	4.55	5.45	
Highest CH	3.54	4.90	4.09	5.71	

Mode	LTE Band 26 / 15MHz				
Mod.	QPSK		16QAM		Limit: 13dB
RB Size	1RB	Full RB	1RB	Full RB	Result
Lowest CH	3.80	5.01	4.64	5.97	PASS
Middle CH	3.94	4.99	4.43	5.83	
Highest CH	3.57	5.25	4.49	6.03	

Mode	LTE Band 38 / 20MHz				
Mod.	QPSK		16QAM		Limit: 13dB
RB Size	1RB	Full RB	1RB	Full RB	Result
Lowest CH	4.00	4.70	7.01	6.70	PASS
Middle CH	4.00	5.10	6.46	5.91	
Highest CH	5.91	5.86	5.28	6.26	

Mode	LTE Band 41 / 20MHz				
Mod.	QPSK		16QAM		Limit: 13dB
RB Size	1RB	Full RB	1RB	Full RB	Result
Lowest CH	5.04	5.25	5.01	5.83	PASS
Middle CH	5.74	5.97	5.51	5.65	
Highest CH	4.96	6.23	5.80	5.71	



LTE Band 5 / 10MHz / QPSK

Lowest Channel / 1RB



Date: 16 APR 2017 22:30:15

Lowest Channel / Full RB



Date: 16 APR 2017 22:30:31

Middle Channel / 1RB




Date: 16 APR 2017 22:30:57

Middle Channel / Full RB



Date: 16 APR 2017 22:31:10

Highest Channel / 1RB

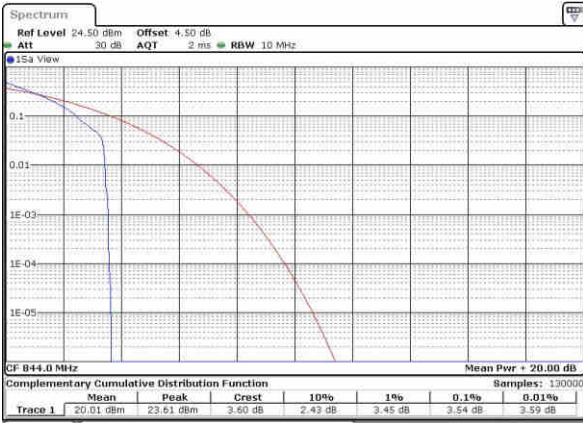

Date: 16 APR 2017 22:31:26

Highest Channel / Full RB




Date: 16 APR 2017 22:31:40



LTE Band 5 / 10MHz / 16QAM

Lowest Channel / 1RB

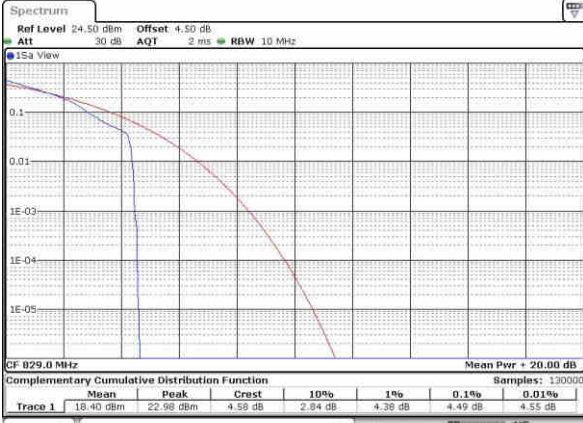


Date: 16 APR 2017 22:28:15

Lowest Channel / Full RB




Date: 16 APR 2017 22:28:29

Middle Channel / 1RB

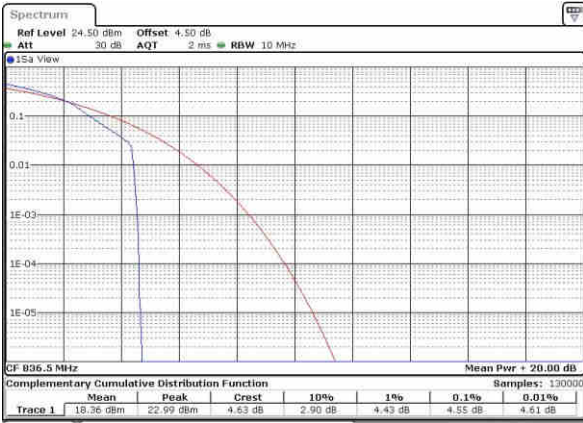

Date: 16 APR 2017 22:28:39

Middle Channel / Full RB

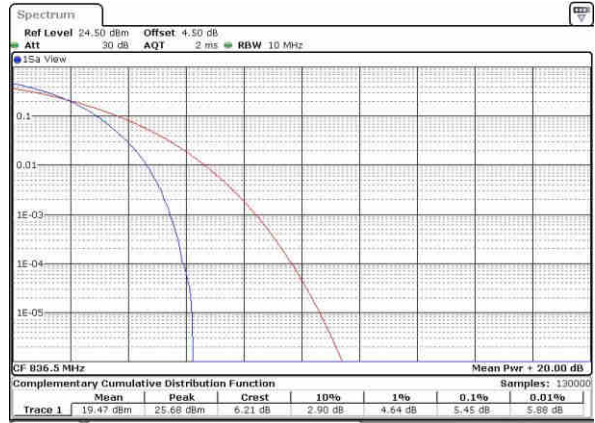

Date: 16 APR 2017 22:28:50

Highest Channel / 1RB



Date: 16 APR 2017 22:29:01

Highest Channel / Full RB



Date: 16 APR 2017 22:29:11




LTE Band 26 / 15MHz / QPSK

Lowest Channel / 1RB




Date: 19.MAR.2017 21:47:53

Lowest Channel / Full RB

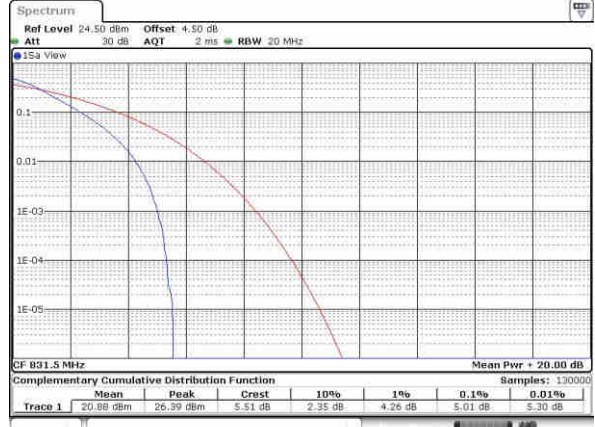


Date: 19.MAR.2017 21:42:52

Middle Channel / 1RB

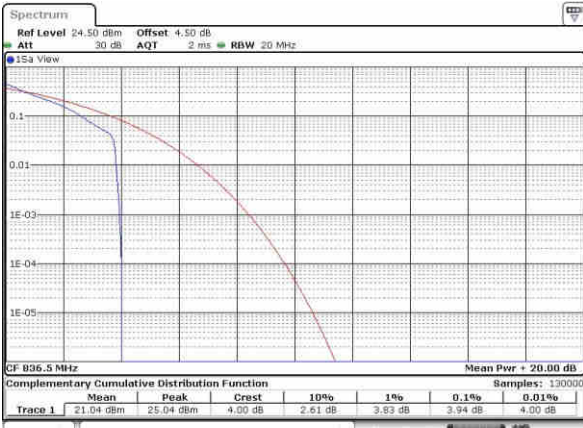

Date: 19.MAR.2017 21:48:54

Middle Channel / Full RB

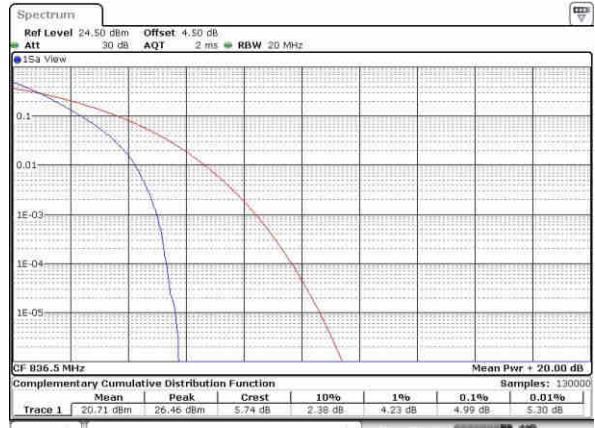


Date: 19.MAR.2017 21:51:09

Highest Channel / 1RB



Date: 19.MAR.2017 21:58:35

Highest Channel / Full RB

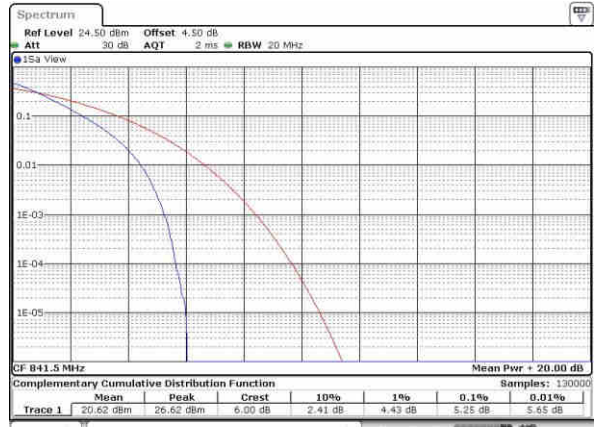


Date: 19.MAR.2017 21:52:45



LTE Band 26 / 15MHz / 16QAM

Lowest Channel / 1RB

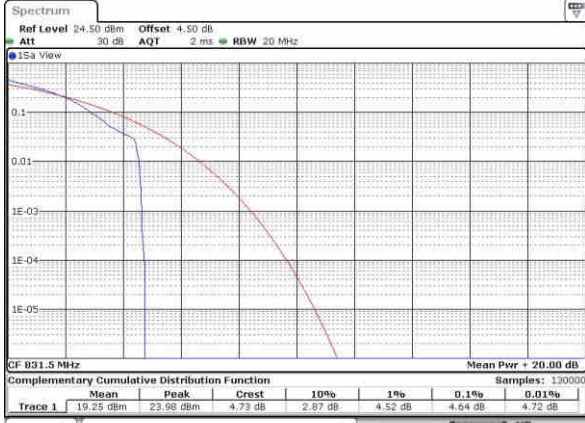

Date: 19.MAR.2017 21:44:59

Lowest Channel / Full RB



Date: 19.MAR.2017 21:41:06

Middle Channel / 1RB




Date: 19.MAR.2017 21:48:10

Middle Channel / Full RB



Date: 19.MAR.2017 21:50:15

Highest Channel / 1RB

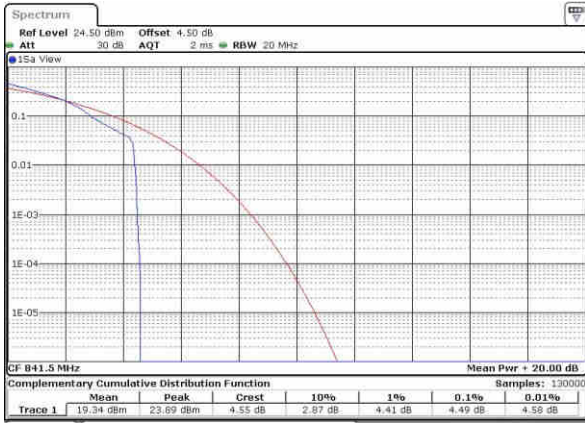

Date: 19.MAR.2017 21:55:59

Highest Channel / Full RB




Date: 19.MAR.2017 21:55:34



LTE Band 38 / 20MHz / QPSK

Lowest Channel / 1RB

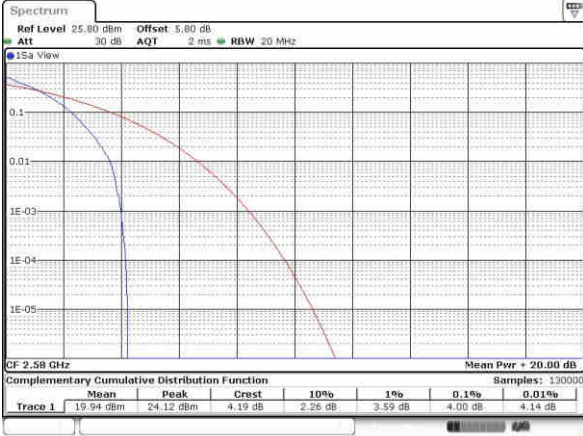

Date: 22.MAR.2017 07:27:40

Lowest Channel / Full RB




Date: 22.MAR.2017 07:23:30

Middle Channel / 1RB




Date: 22.MAR.2017 07:27:20

Middle Channel / Full RB

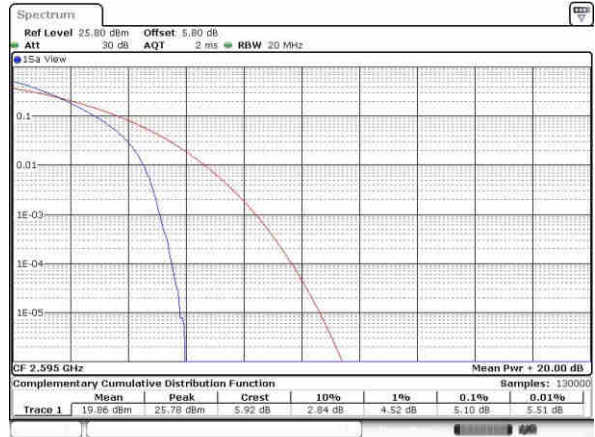


Date: 22.MAR.2017 07:24:00

Highest Channel / 1RB

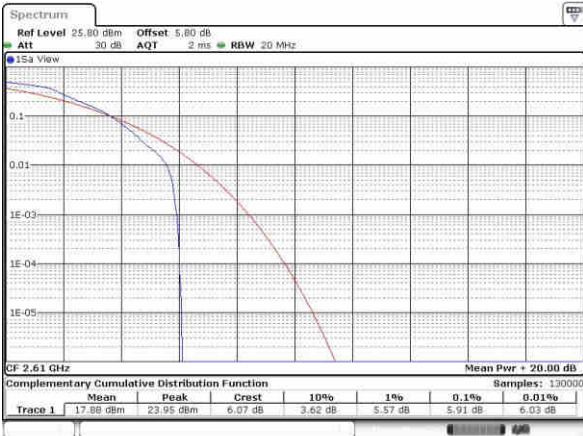

Date: 22.MAR.2017 07:27:01

Highest Channel / Full RB

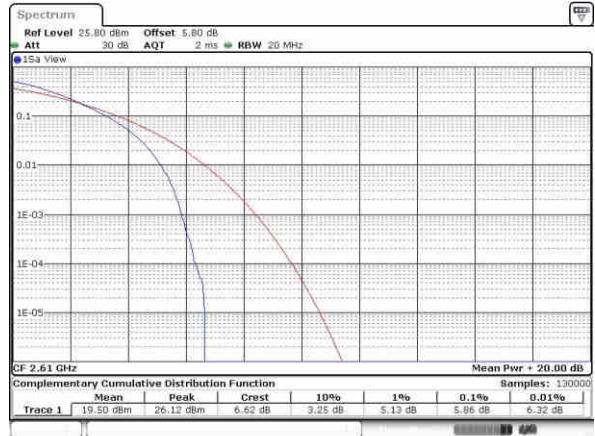


Date: 22.MAR.2017 07:24:16




LTE Band 38 / 20MHz / 16QAM

Lowest Channel / 1RB

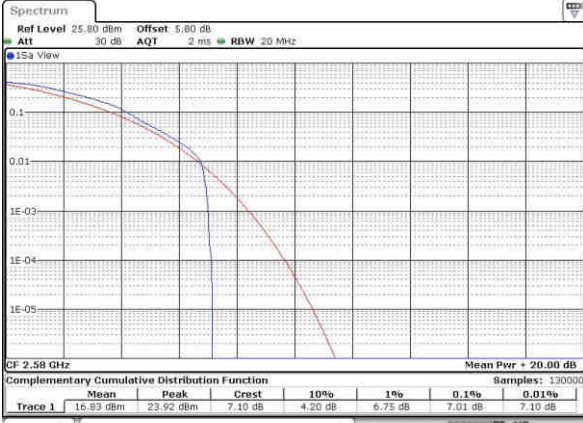


Date: 22.MAR.2017 07:26:13

Lowest Channel / Full RB

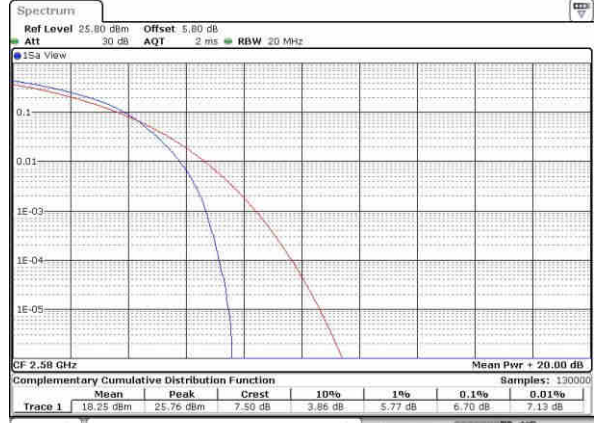

Date: 22.MAR.2017 07:25:56

Middle Channel / 1RB

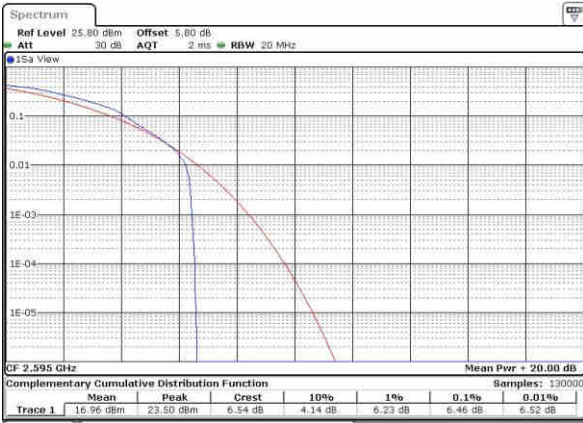


Date: 22.MAR.2017 07:26:33

Middle Channel / Full RB



Date: 22.MAR.2017 07:25:37

Highest Channel / 1RB

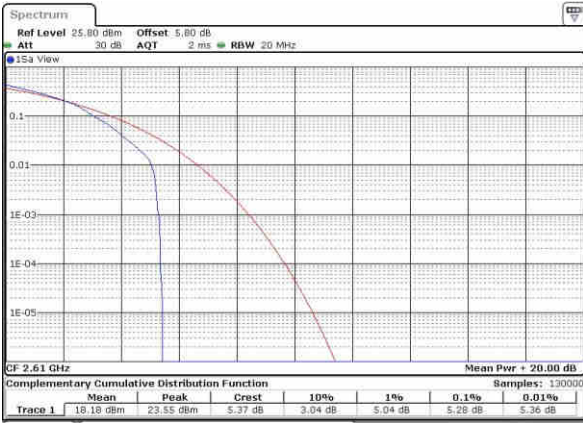

Date: 22.MAR.2017 07:26:47

Highest Channel / Full RB




Date: 22.MAR.2017 07:25:13



LTE Band 41 / 20MHz / QPSK

Lowest Channel / 1RB

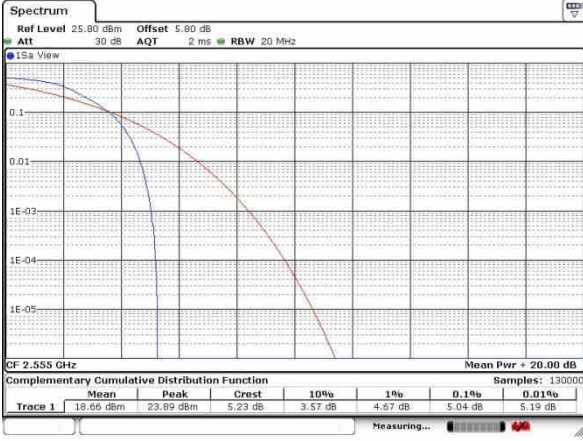


Date: 2 APR 2017 00:44:32

Lowest Channel / Full RB



Date: 2 APR 2017 00:45:54

Middle Channel / 1RB

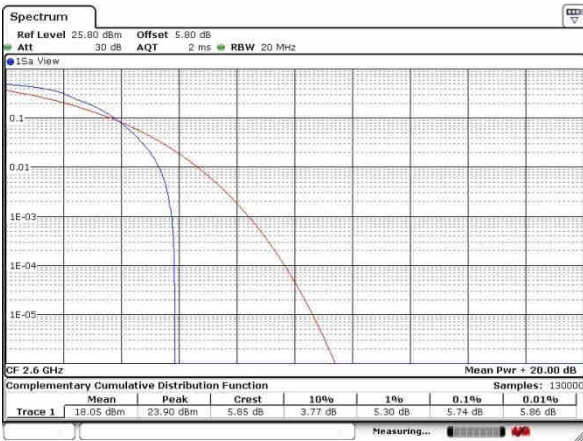


Date: 2 APR 2017 00:44:06

Middle Channel / Full RB




Date: 2 APR 2017 00:43:01

Highest Channel / 1RB

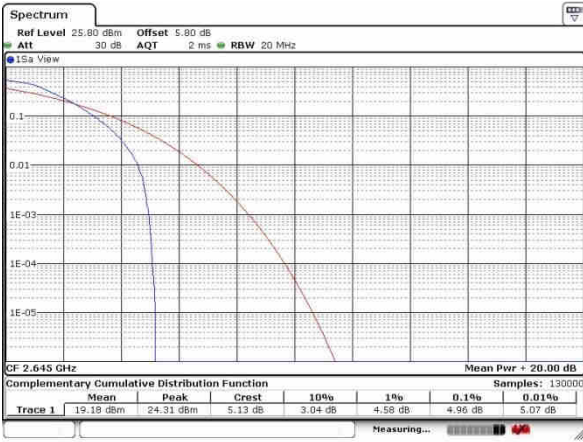

Date: 2 APR 2017 00:40:49

Highest Channel / Full RB

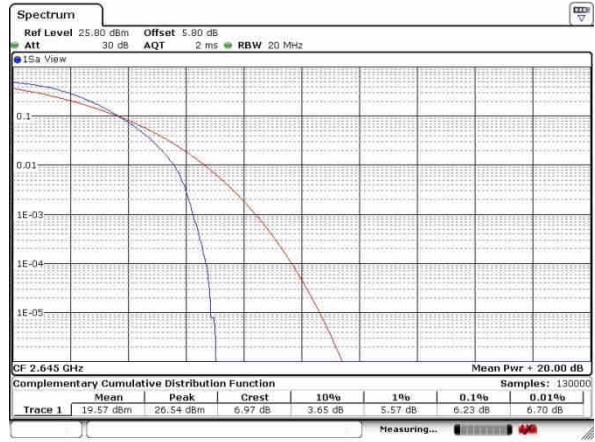

Date: 2 APR 2017 00:42:07



LTE Band 41 / 20MHz / 16QAM

Lowest Channel / 1RB



Date: 2 APR 2017 00:45:04

Lowest Channel / Full RB



Date: 2 APR 2017 00:45:27

Middle Channel / 1RB



Date: 2 APR 2017 00:43:41

Middle Channel / Full RB



Date: 2 APR 2017 00:43:24

Highest Channel / 1RB



Date: 2 APR 2017 00:41:31

Highest Channel / Full RB



Date: 2 APR 2017 00:41:48



26dB Bandwidth

Mode	LTE Band 5 : 26dB BW(MHz)											
	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH	1.27	1.27	3.01	3.00	5.00	4.96	9.85	9.79	-	-	-	-
Middle CH	1.29	1.32	2.96	3.03	4.94	4.88	9.67	9.95	-	-	-	-
Highest CH	1.25	1.30	2.99	3.02	5.01	4.95	9.79	9.73	-	-	-	-

Mode	LTE Band 26 : 26dB BW(MHz)											
	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH	1.28	1.25	3.00	3.04	4.91	5.01	9.79	9.63	14.33	14.24	-	-
Middle CH	1.29	1.29	2.97	3.02	4.87	4.93	9.75	9.81	14.42	14.57	-	-
Highest CH	1.26	1.28	2.97	2.97	4.98	4.88	9.73	9.79	14.39	14.51	-	-


Mode	LTE Band 38 : 26dB BW(MHz)											
	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH	-	-	-	-	4.93	4.96	9.67	9.69	14.21	14.51	20.14	20.30
Middle CH	-	-	-	-	4.88	4.94	9.81	9.67	14.21	14.30	20.14	20.26
Highest CH	-	-	-	-	4.89	4.87	9.69	9.83	14.39	14.30	20.10	20.30

Mode	LTE Band 41 : 26dB BW(MHz)											
	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH					4.75	4.91	9.85	9.69	14.33	14.42	19.98	20.06
Middle CH					4.92	4.81	9.75	9.61	14.48	14.36	20.18	20.06
Highest CH					4.91	4.89	9.65	9.71	14.48	14.18	20.02	20.06




LTE Band 5

Lowest Channel / 1.4MHz / QPSK

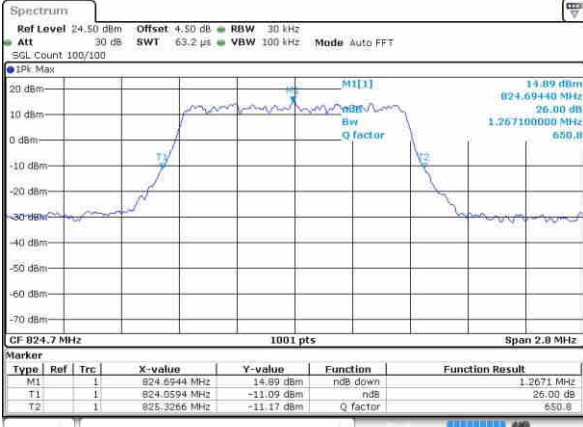


Date: 16 APR 2017 21:04:43

Lowest Channel / 1.4MHz / 16QAM

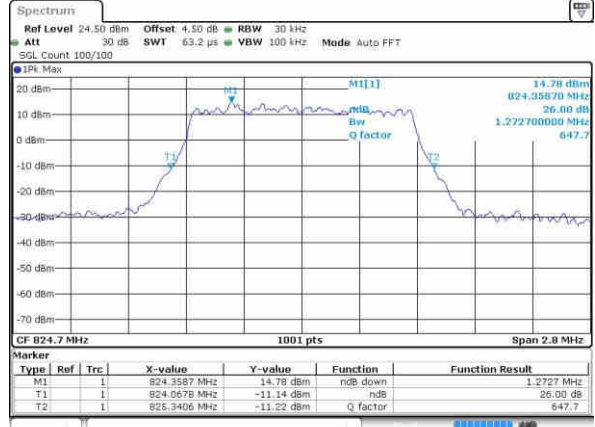


Date: 16 APR 2017 21:04:32

Middle Channel / 1.4MHz / QPSK

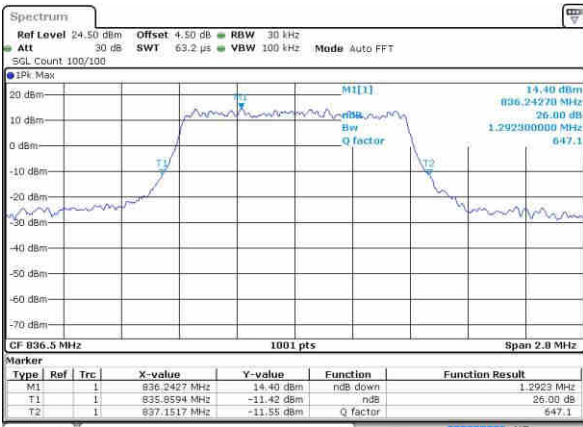


Date: 16 APR 2017 21:13:44

Middle Channel / 1.4MHz / 16QAM

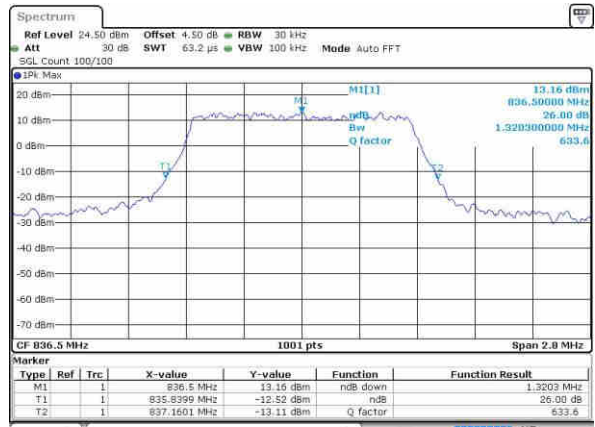


Date: 16 APR 2017 21:13:56

Highest Channel / 1.4MHz / QPSK

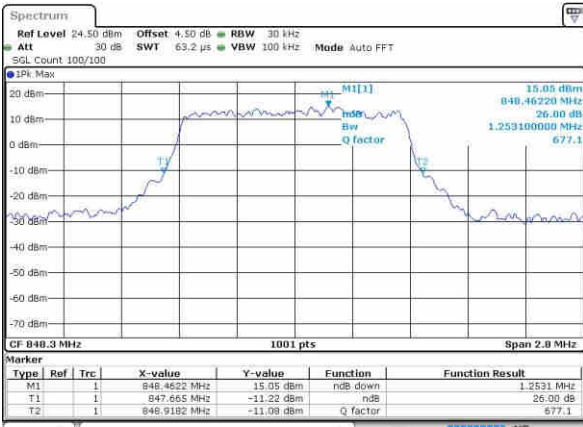

Date: 16 APR 2017 21:16:21

Highest Channel / 1.4MHz / 16QAM

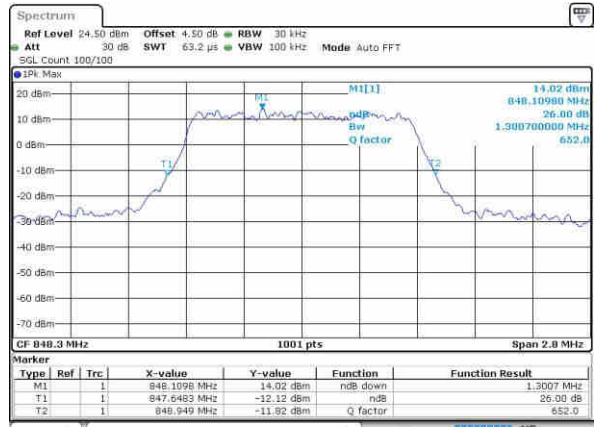


Date: 16 APR 2017 21:16:33




LTE Band 5

Lowest Channel / 3MHz / QPSK

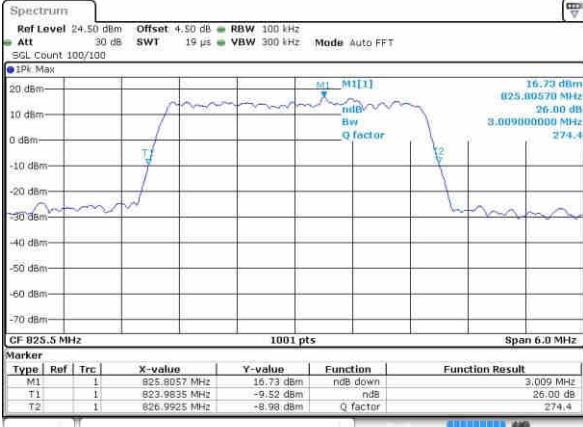


Date: 16 APR 2017 21:25:33

Lowest Channel / 3MHz / 16QAM

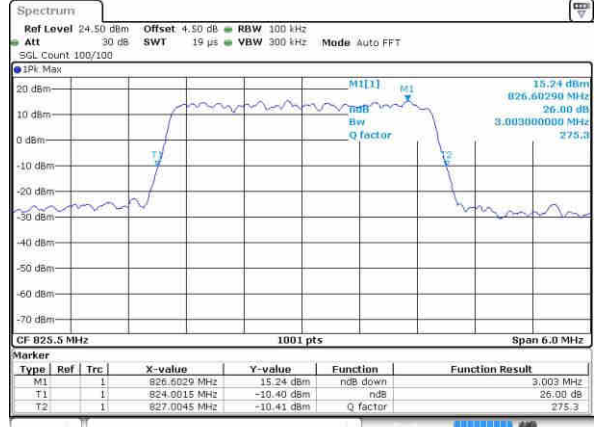


Date: 16 APR 2017 21:25:45

Middle Channel / 3MHz / QPSK

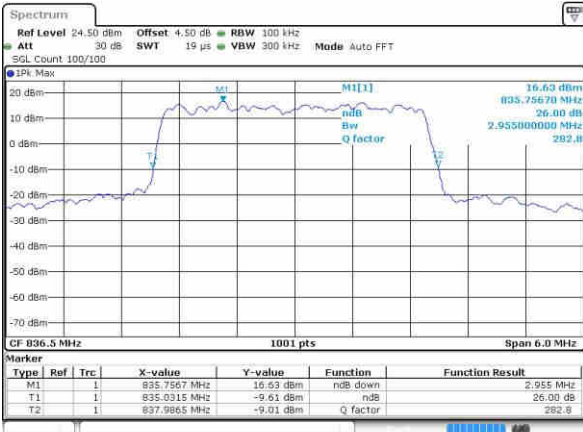


Date: 16 APR 2017 21:34:46

Middle Channel / 3MHz / 16QAM

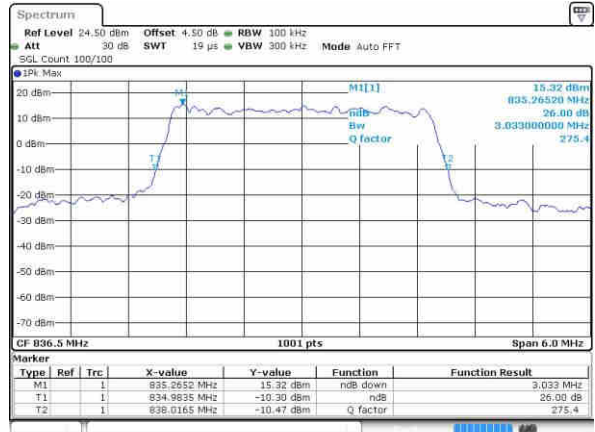


Date: 16 APR 2017 21:34:57

Highest Channel / 3MHz / QPSK

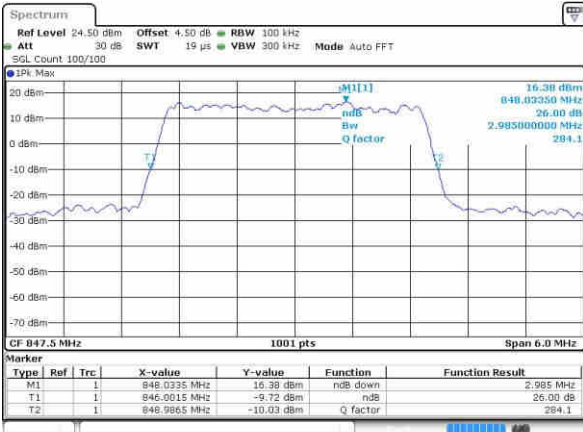

Date: 16 APR 2017 21:37:22

Highest Channel / 3MHz / 16QAM

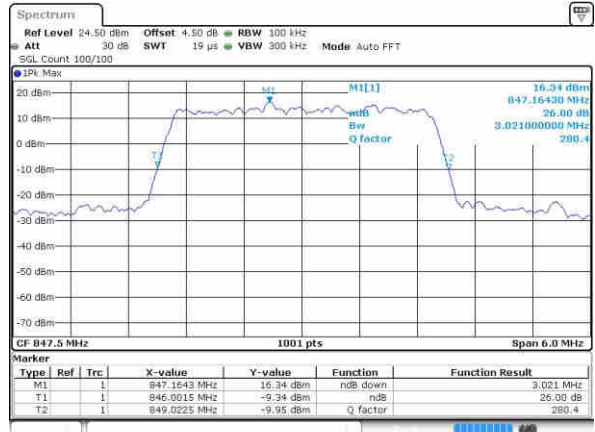


Date: 16 APR 2017 21:37:34




LTE Band 5

Lowest Channel / 5MHz / QPSK

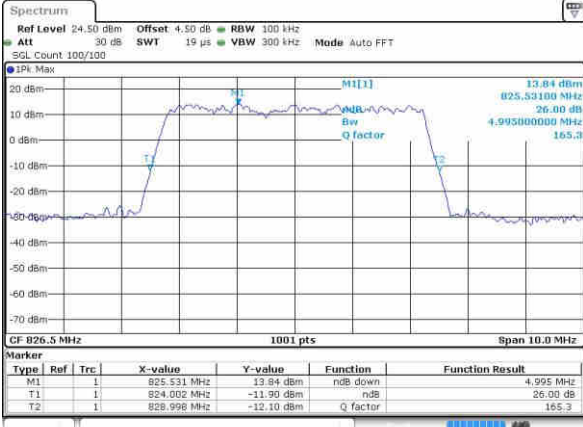


Date: 16 APR 2017 21:46:34

Lowest Channel / 5MHz / 16QAM

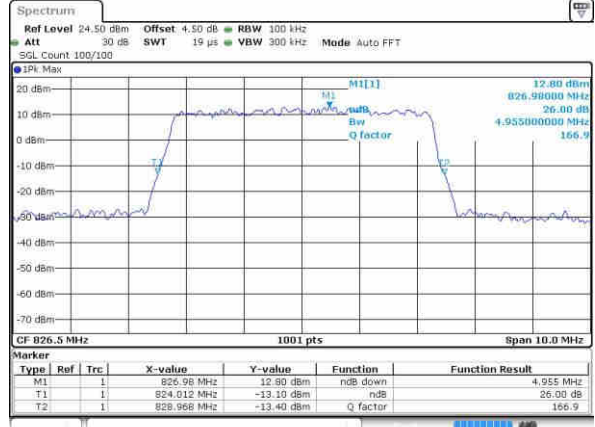


Date: 16 APR 2017 21:46:45

Middle Channel / 5MHz / QPSK

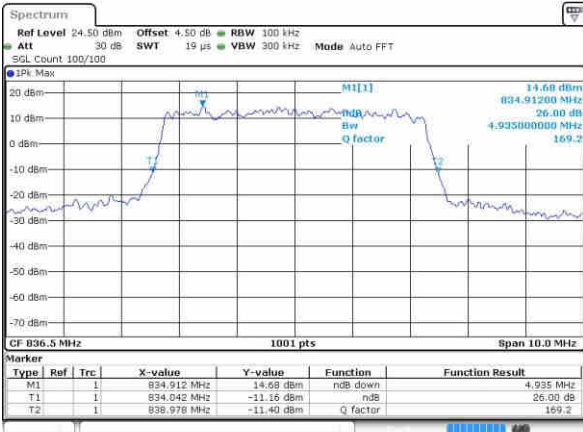


Date: 16 APR 2017 21:55:46

Middle Channel / 5MHz / 16QAM

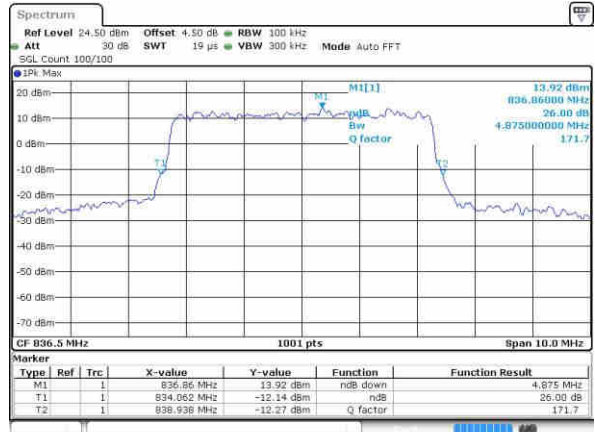


Date: 16 APR 2017 21:55:57

Highest Channel / 5MHz / QPSK

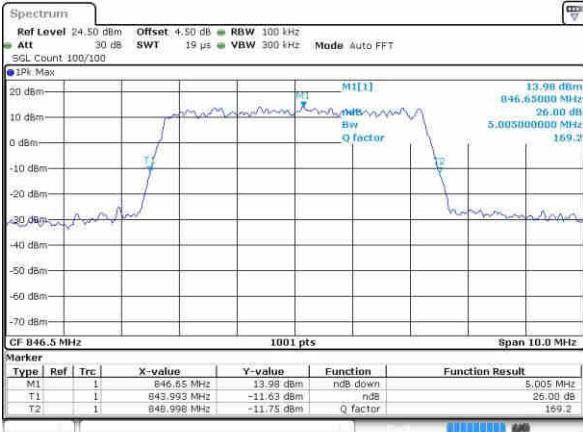

Date: 16 APR 2017 21:58:23

Highest Channel / 5MHz / 16QAM

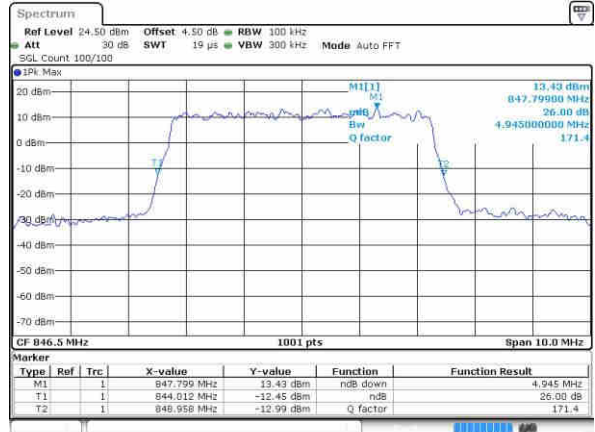


Date: 16 APR 2017 21:58:34




LTE Band 5

Lowest Channel / 10MHz / QPSK

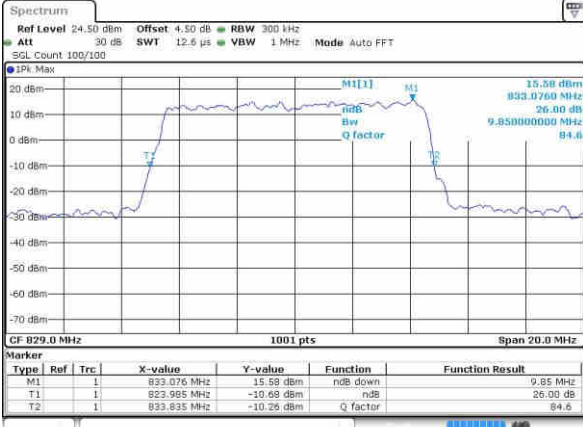


Date: 16 APR 2017 22:07:34

Lowest Channel / 10MHz / 16QAM

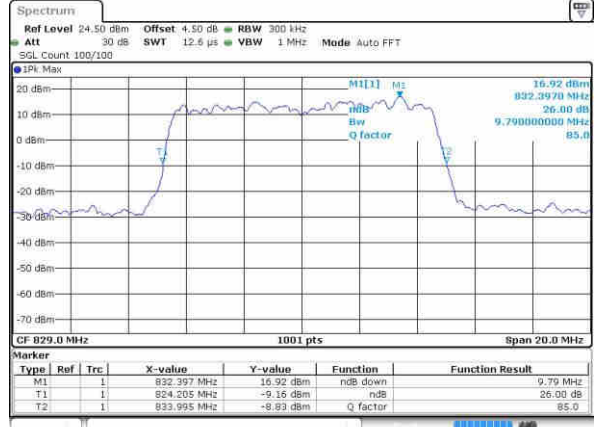


Date: 16 APR 2017 22:07:46

Middle Channel / 10MHz / QPSK

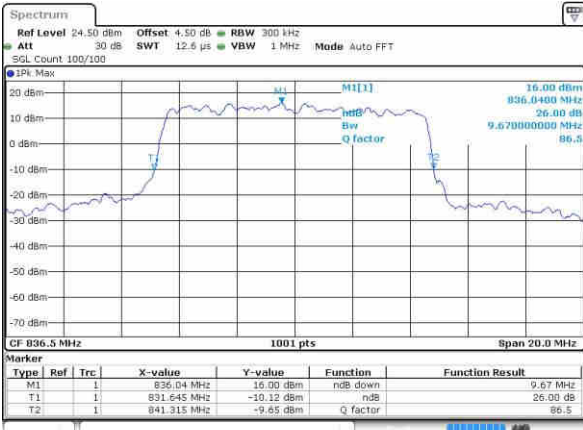


Date: 16 APR 2017 22:16:46

Middle Channel / 10MHz / 16QAM

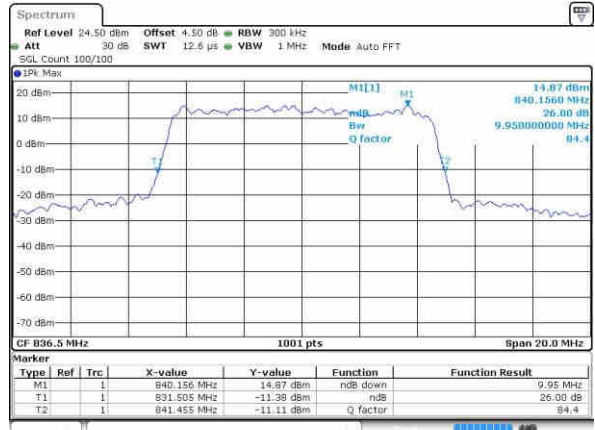


Date: 16 APR 2017 22:16:58

Highest Channel / 10MHz / QPSK

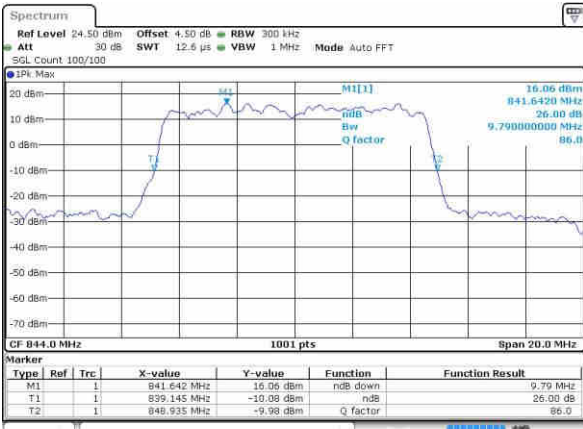

Date: 16 APR 2017 22:19:23

Highest Channel / 10MHz / 16QAM

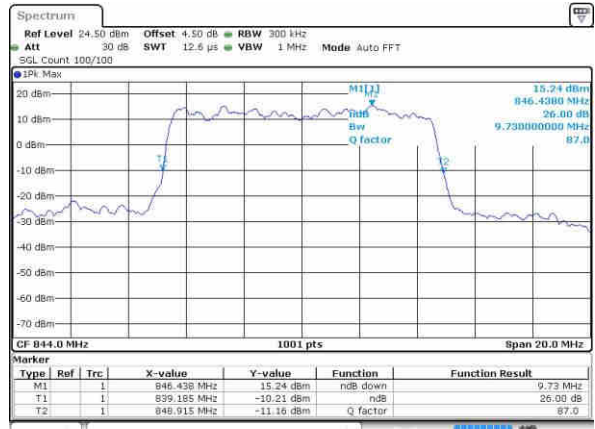


Date: 16 APR 2017 22:19:34




LTE Band 26

Lowest Channel / 1.4MHz / QPSK

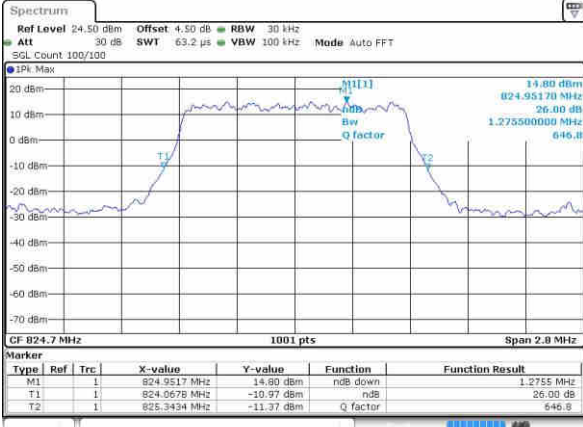


Date: 19 MAR 2017 20:33:56

Lowest Channel / 1.4MHz / 16QAM

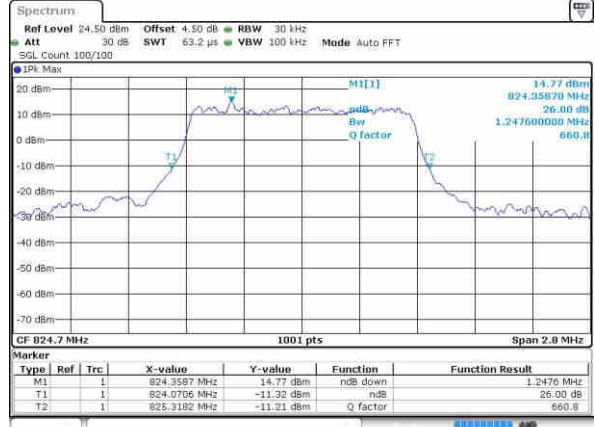


Date: 19 MAR 2017 20:30:03

Middle Channel / 1.4MHz / QPSK

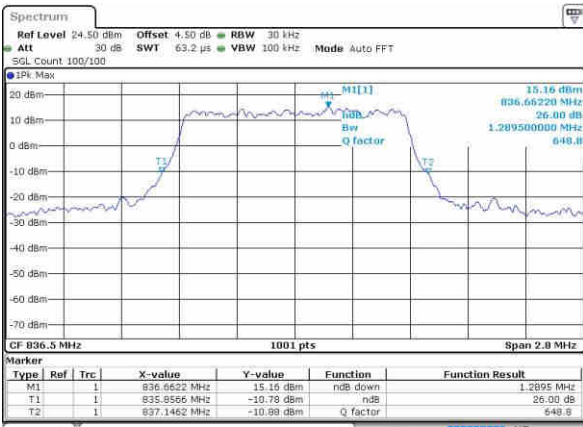


Date: 19 MAR 2017 20:41:50

Middle Channel / 1.4MHz / 16QAM

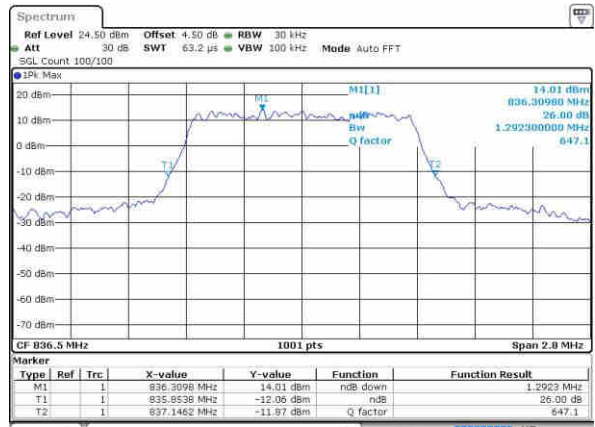


Date: 19 MAR 2017 20:40:07

Highest Channel / 1.4MHz / QPSK

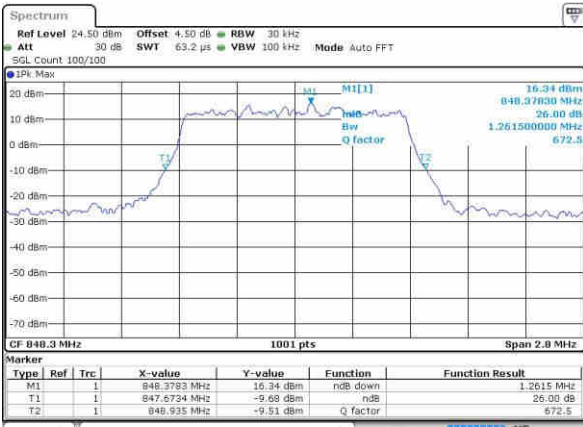

Date: 19 MAR 2017 20:42:54

Highest Channel / 1.4MHz / 16QAM

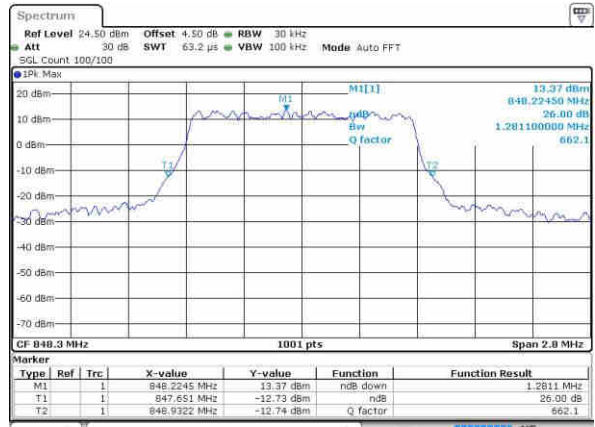


Date: 19 MAR 2017 20:47:48




LTE Band 26

Lowest Channel / 3MHz / QPSK

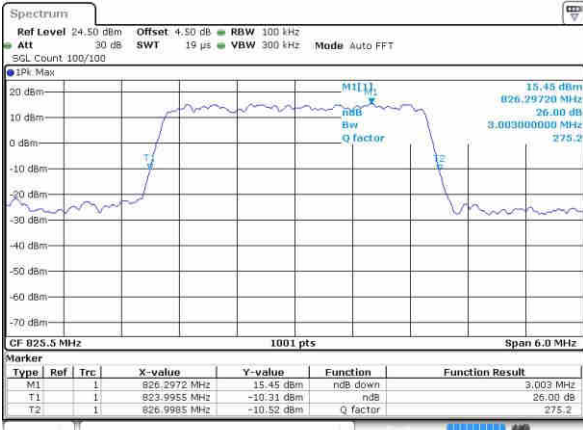


Date: 19 MAR 2017 20:54:26

Lowest Channel / 3MHz / 16QAM

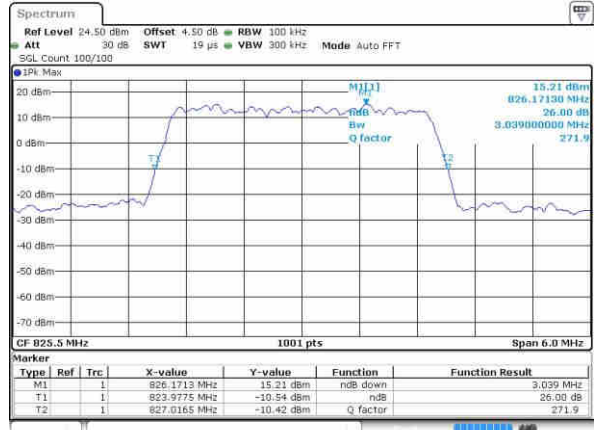


Date: 19 MAR 2017 20:52:48

Middle Channel / 3MHz / QPSK

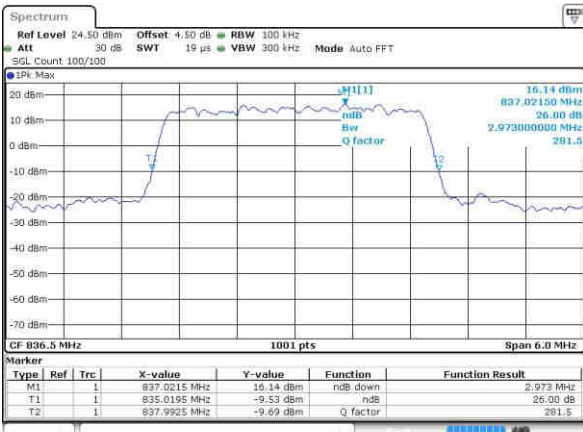


Date: 19 MAR 2017 21:00:40

Middle Channel / 3MHz / 16QAM

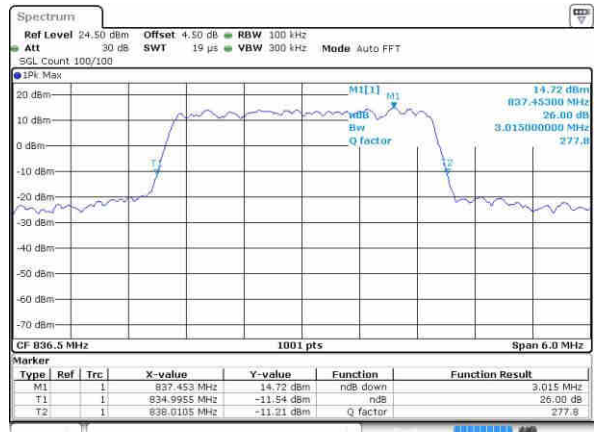


Date: 19 MAR 2017 21:01:52

Highest Channel / 3MHz / QPSK

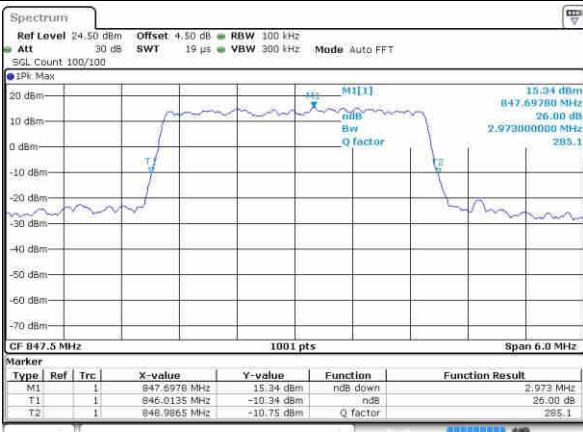

Date: 19 MAR 2017 21:05:10

Highest Channel / 3MHz / 16QAM

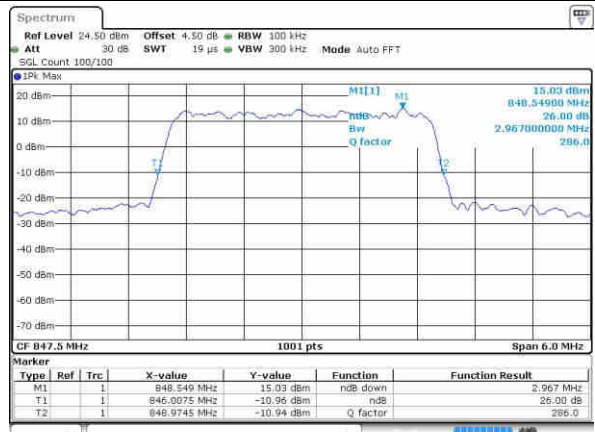


Date: 19 MAR 2017 21:02:35




LTE Band 26

Lowest Channel / 5MHz / QPSK

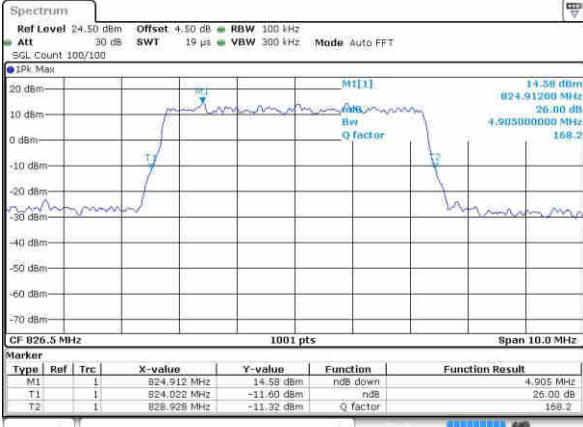


Date: 19.MAR.2017 21:09:32

Lowest Channel / 5MHz / 16QAM

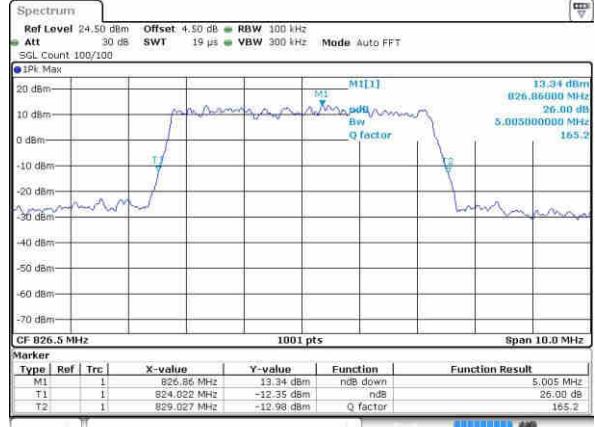


Date: 19.MAR.2017 21:11:48

Middle Channel / 5MHz / QPSK

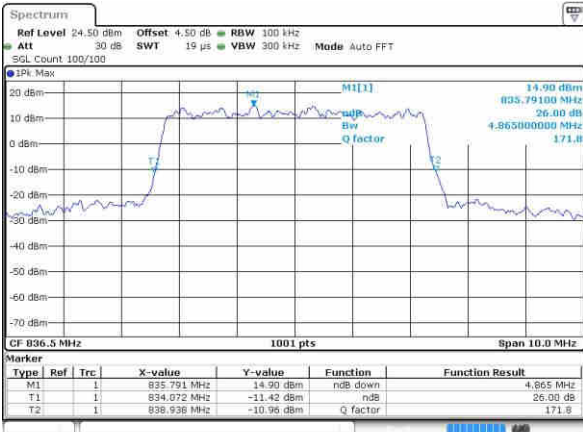


Date: 19.MAR.2017 21:18:16

Middle Channel / 5MHz / 16QAM

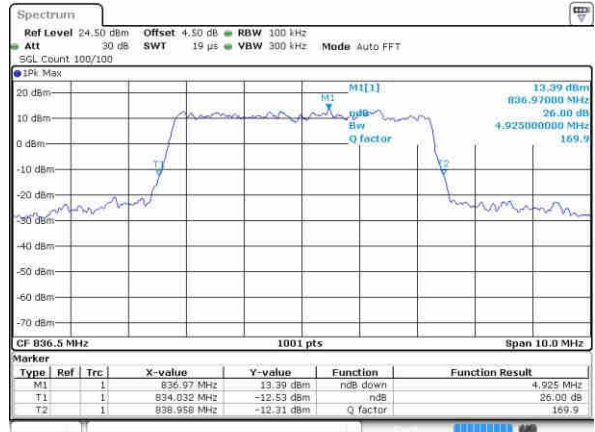


Date: 19.MAR.2017 21:17:52

Highest Channel / 5MHz / QPSK

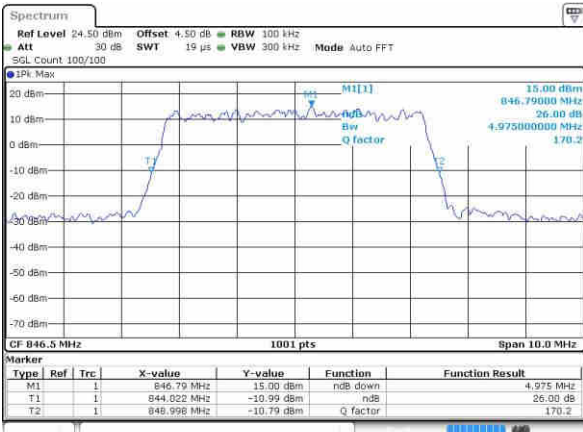

Date: 19.MAR.2017 21:18:57

Highest Channel / 5MHz / 16QAM

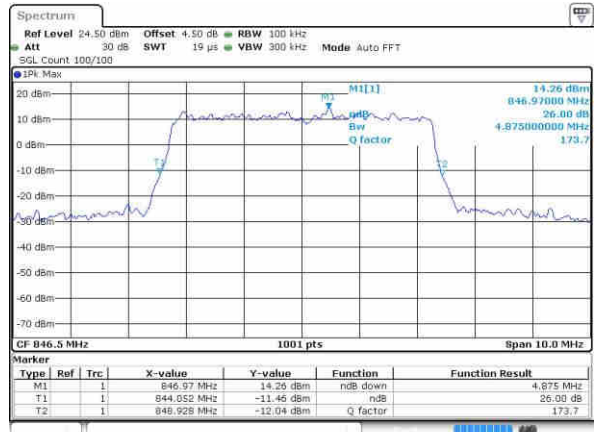


Date: 19.MAR.2017 21:21:13




LTE Band 26

Lowest Channel / 10MHz / QPSK

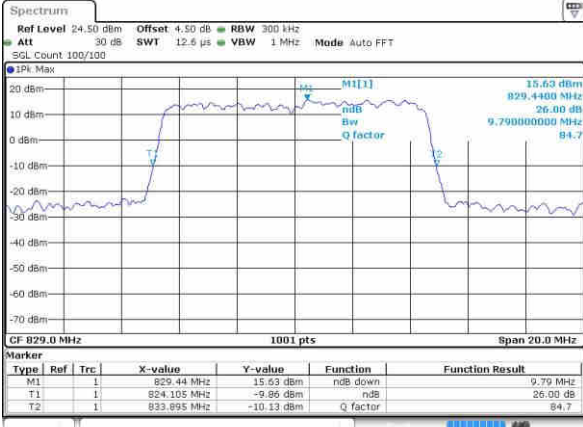


Date: 19 MAR 2017 21:26:54

Lowest Channel / 10MHz / 16QAM

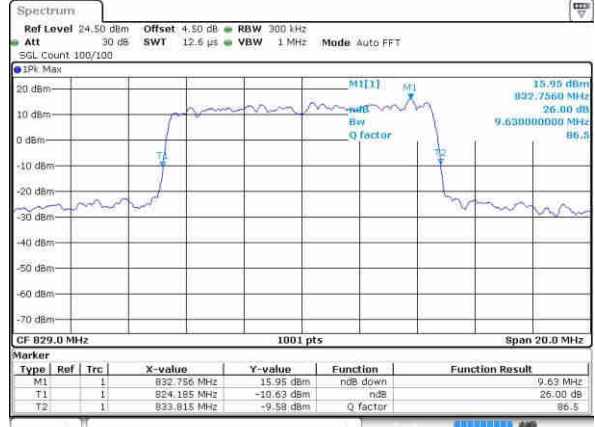


Date: 19 MAR 2017 21:30:53

Middle Channel / 10MHz / QPSK

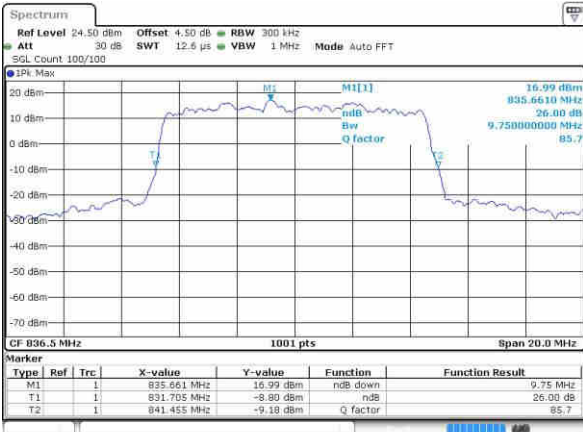


Date: 19 MAR 2017 21:33:25

Middle Channel / 10MHz / 16QAM

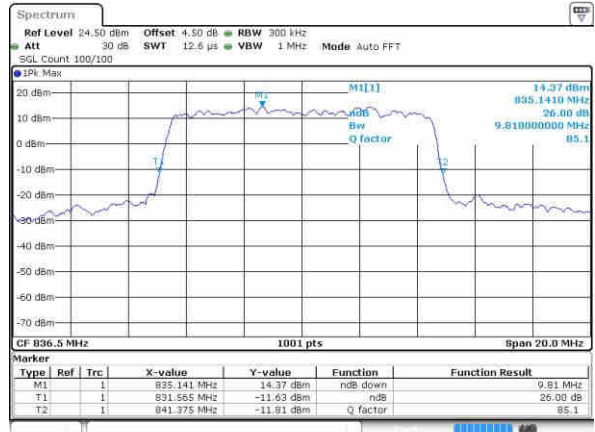


Date: 19 MAR 2017 21:33:02

Highest Channel / 10MHz / QPSK

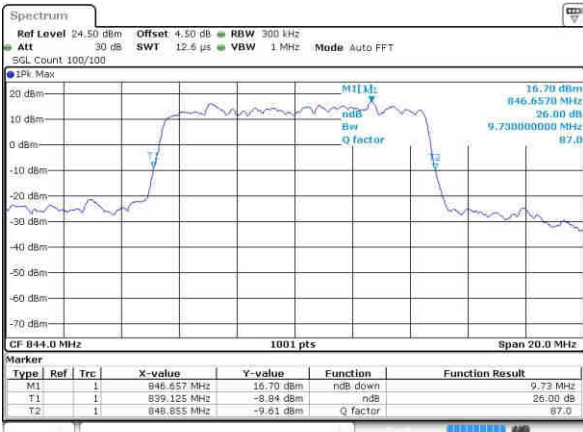

Date: 19 MAR 2017 21:34:22

Highest Channel / 10MHz / 16QAM

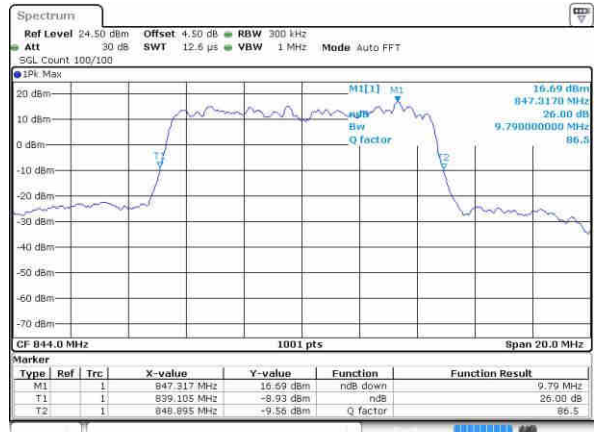


Date: 19 MAR 2017 21:36:43




LTE Band 26

Lowest Channel / 15MHz / QPSK

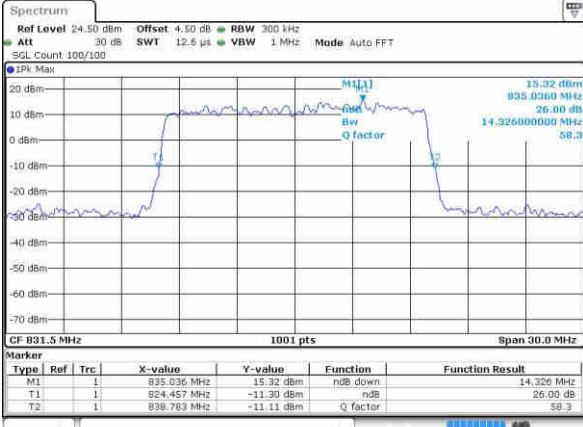


Date: 19 MAR 2017 21:41:38

Lowest Channel / 15MHz / 16QAM

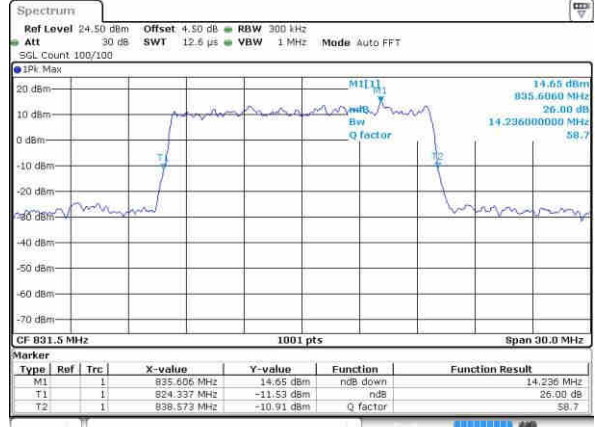


Date: 19 MAR 2017 21:43:55

Middle Channel / 15MHz / QPSK

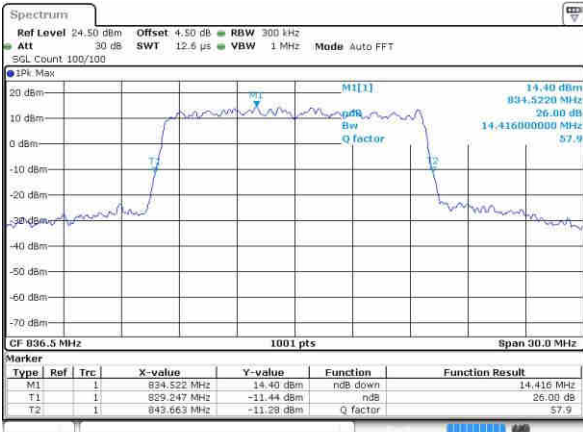


Date: 19 MAR 2017 21:51:38

Middle Channel / 15MHz / 16QAM

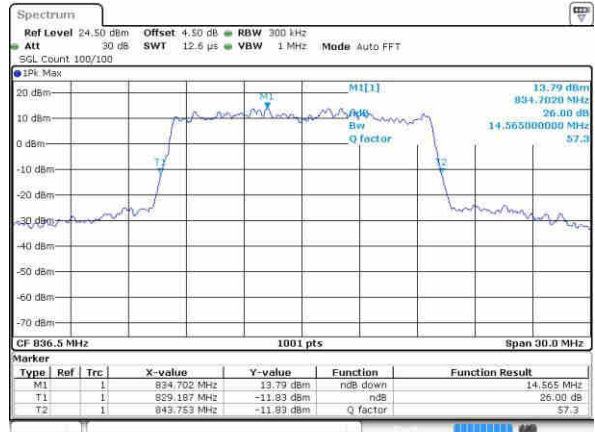


Date: 19 MAR 2017 21:54:45

Highest Channel / 15MHz / QPSK

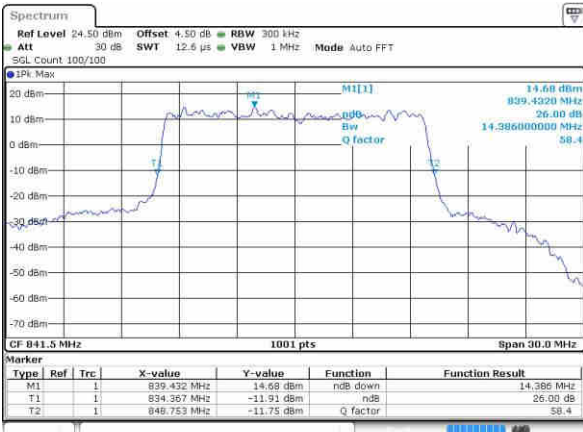

Date: 19 MAR 2017 21:53:07

Highest Channel / 15MHz / 16QAM

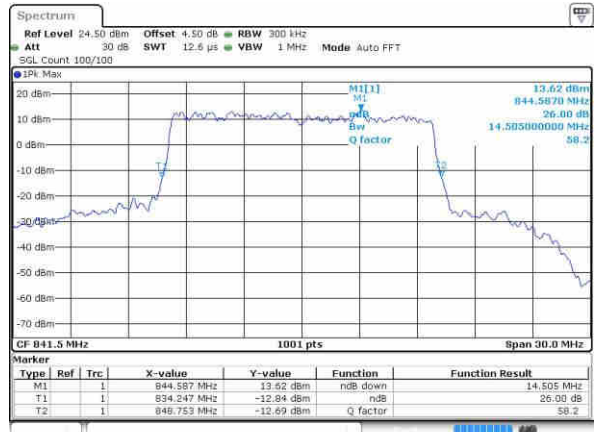


Date: 19 MAR 2017 21:54:55




LTE Band 38

Lowest Channel / 5MHz / QPSK

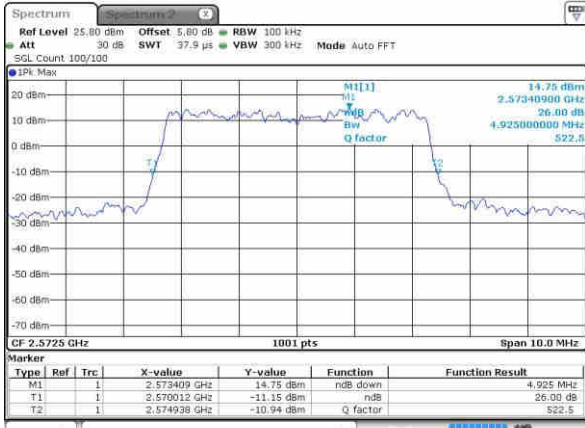


Date: 22.MAR.2017 01:06:45

Lowest Channel / 5MHz / 16QAM

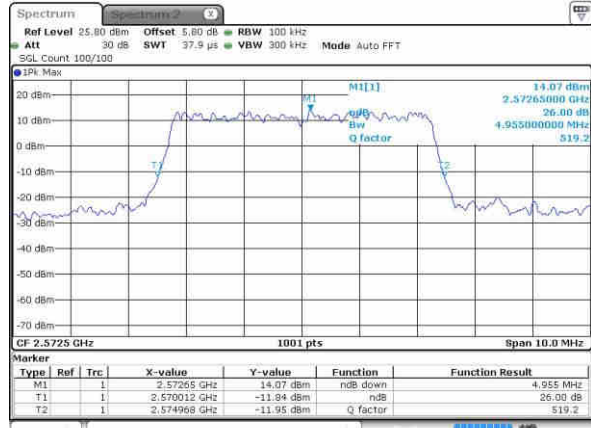


Date: 22.MAR.2017 01:07:46

Middle Channel / 5MHz / QPSK

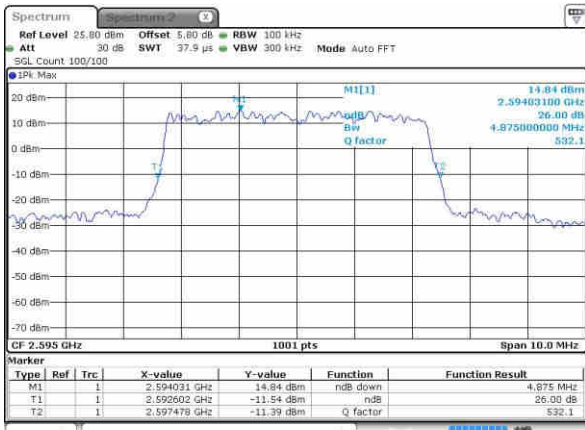


Date: 22.MAR.2017 01:08:48

Middle Channel / 5MHz / 16QAM

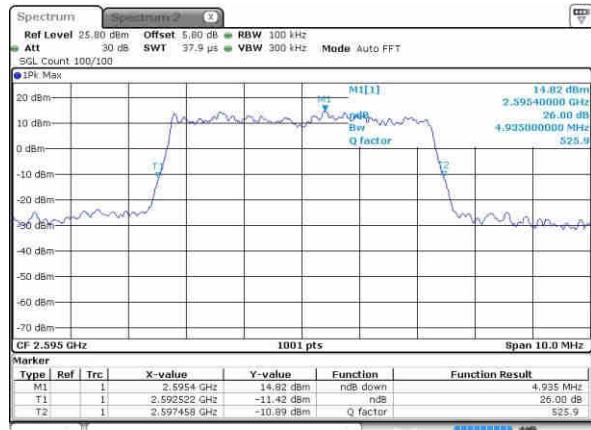


Date: 22.MAR.2017 01:11:26

Highest Channel / 5MHz / QPSK

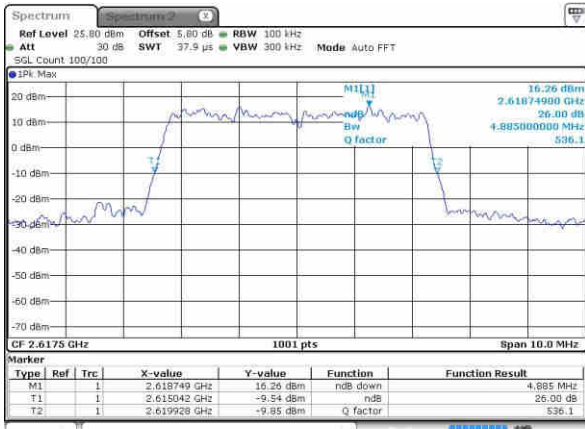

Date: 22.MAR.2017 01:09:15

Highest Channel / 5MHz / 16QAM

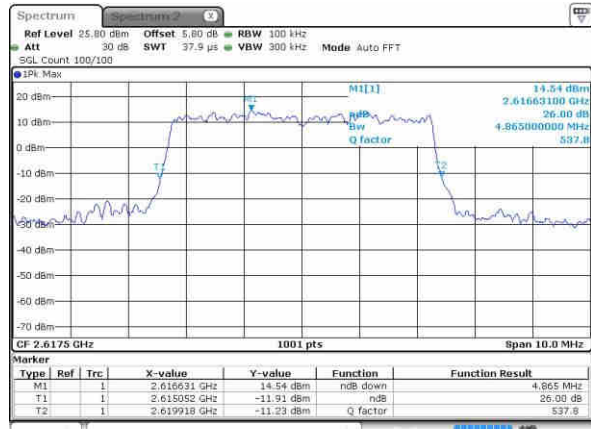


Date: 22.MAR.2017 01:09:47




LTE Band 38

Lowest Channel / 10MHz / QPSK

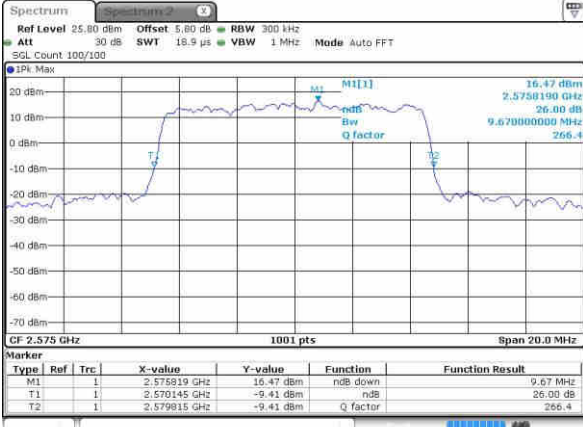


Date: 22.MAR.2017 01:45:44

Lowest Channel / 10MHz / 16QAM

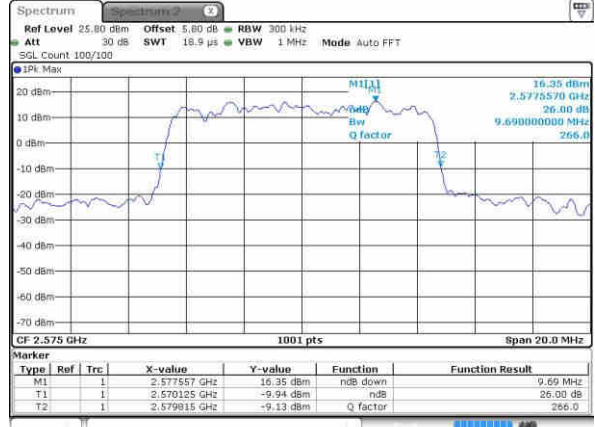


Date: 22.MAR.2017 01:48:52

Middle Channel / 10MHz / QPSK

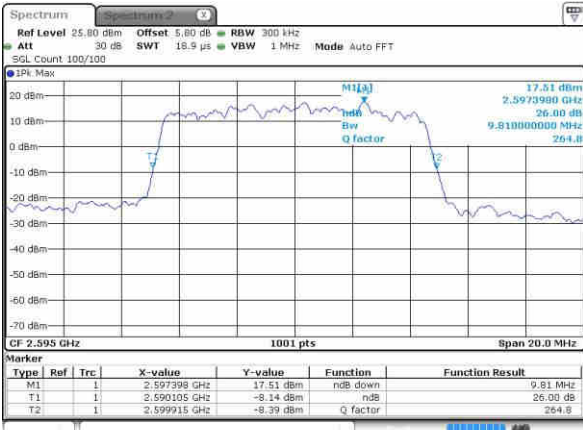


Date: 22.MAR.2017 01:46:29

Middle Channel / 10MHz / 16QAM

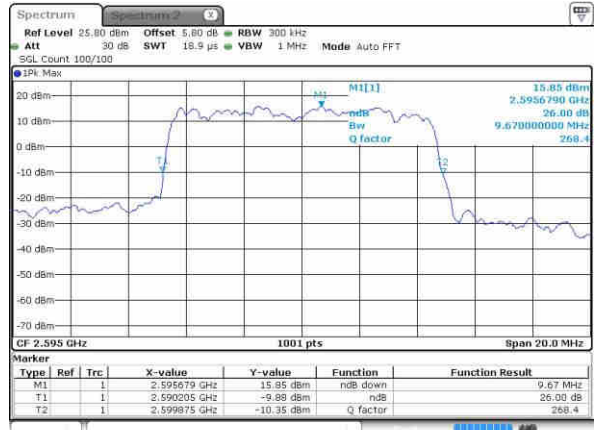


Date: 22.MAR.2017 01:48:23

Highest Channel / 10MHz / QPSK

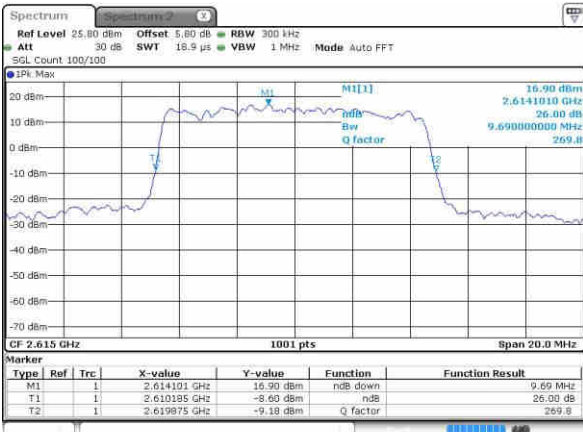

Date: 22.MAR.2017 01:47:04

Highest Channel / 10MHz / 16QAM

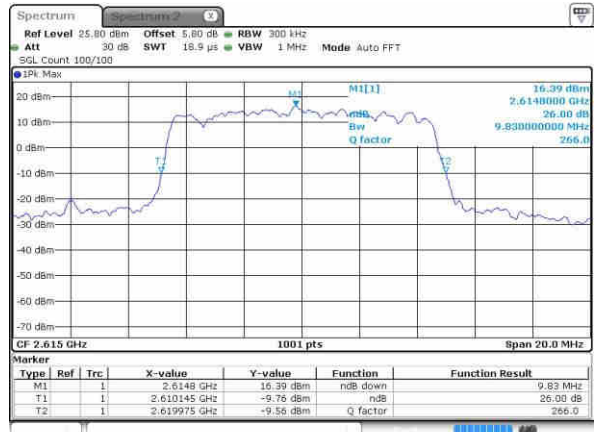


Date: 22.MAR.2017 01:47:51




LTE Band 38

Lowest Channel / 15MHz / QPSK

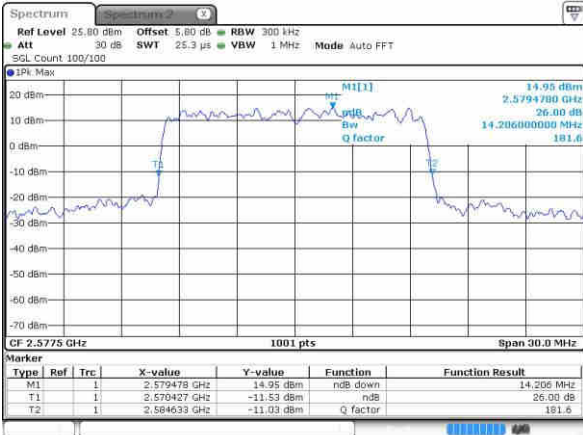


Date: 22.MAR.2017 03:28:00

Lowest Channel / 15MHz / 16QAM

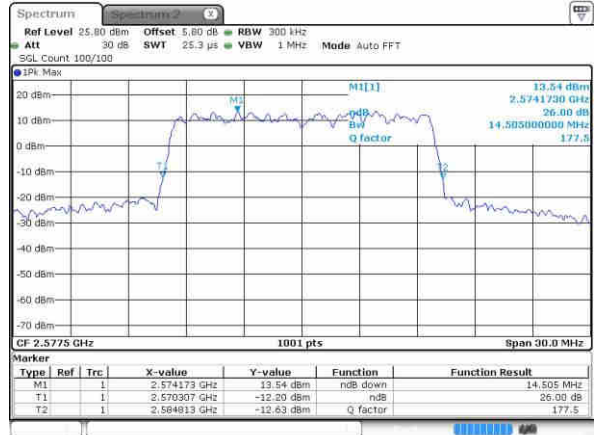


Date: 22.MAR.2017 03:24:25

Middle Channel / 15MHz / QPSK

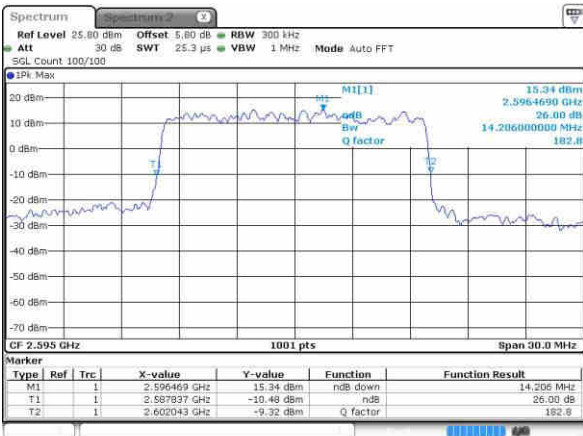


Date: 22.MAR.2017 03:27:14

Middle Channel / 15MHz / 16QAM

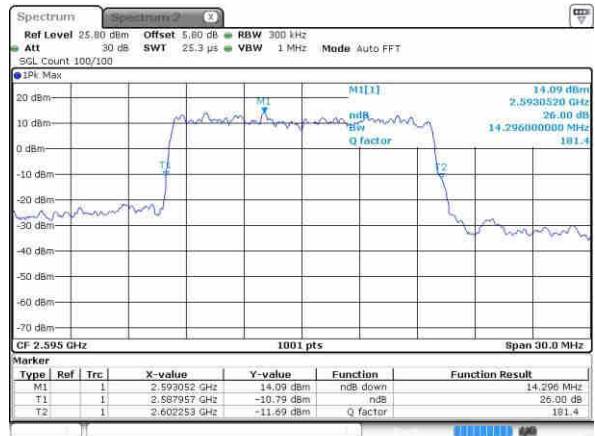


Date: 22.MAR.2017 03:25:16

Highest Channel / 15MHz / QPSK

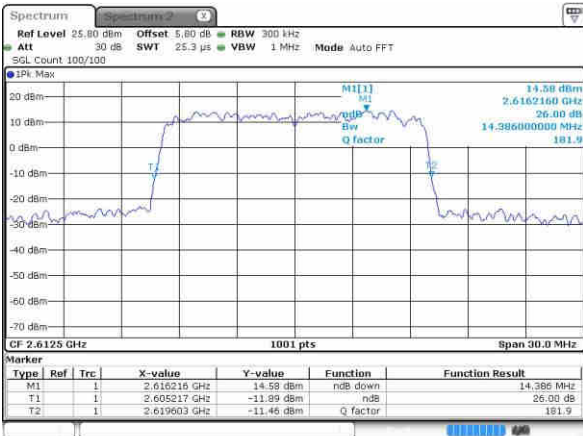

Date: 22.MAR.2017 03:26:43

Highest Channel / 15MHz / 16QAM

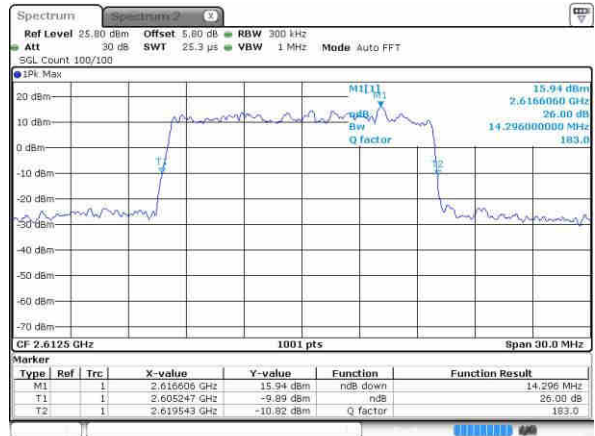


Date: 22.MAR.2017 03:30:42




LTE Band 38

Lowest Channel / 20MHz / QPSK

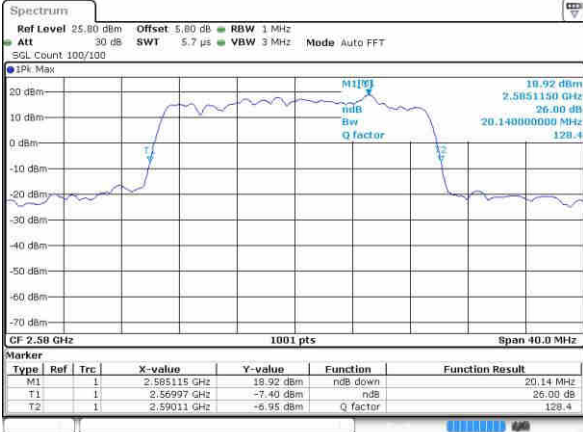


Date: 22.MAR.2017 07:01:43

Lowest Channel / 20MHz / 16QAM

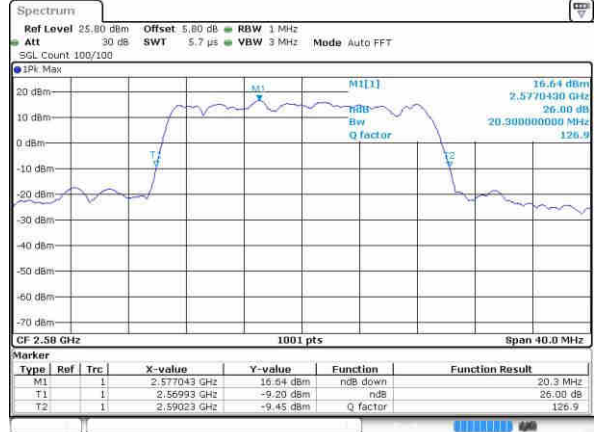


Date: 22.MAR.2017 06:53:32

Middle Channel / 20MHz / QPSK

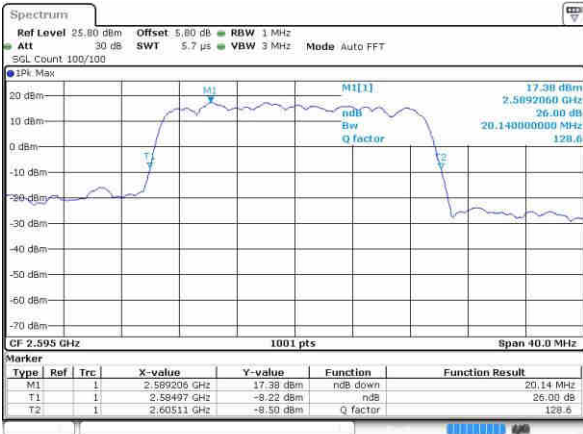


Date: 22.MAR.2017 07:02:10

Middle Channel / 20MHz / 16QAM

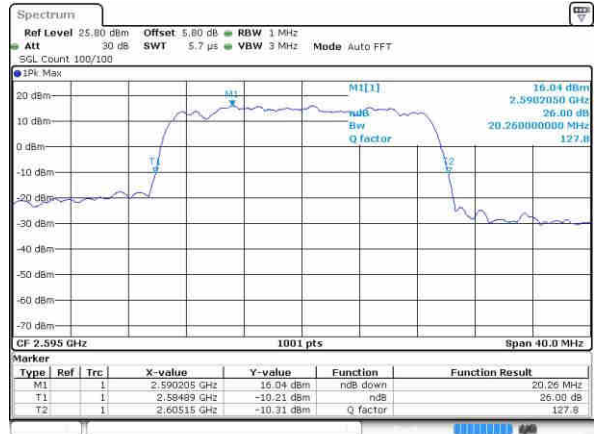


Date: 22.MAR.2017 06:53:51

Highest Channel / 20MHz / QPSK

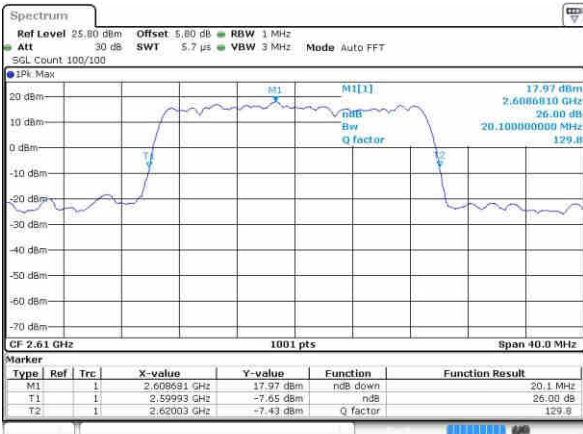

Date: 22.MAR.2017 07:02:38

Highest Channel / 20MHz / 16QAM

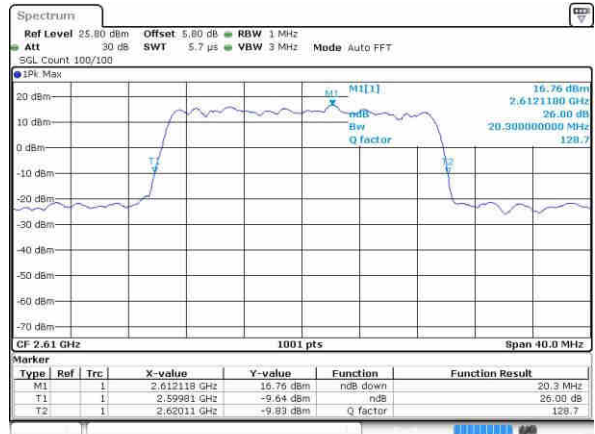


Date: 22.MAR.2017 06:54:28




LTE Band 41

Lowest Channel / 5MHz / QPSK

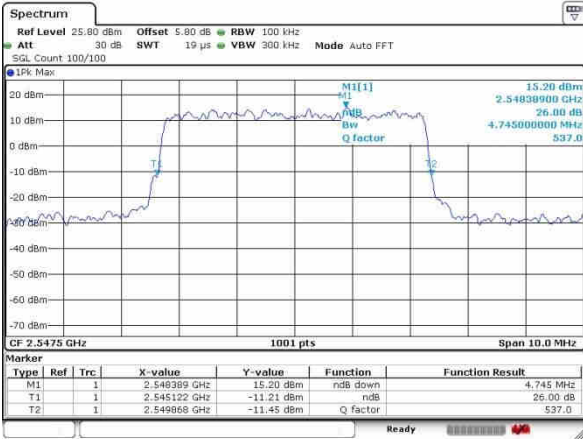


Date: 2 APR 2017 00:20:24

Lowest Channel / 5MHz / 16QAM

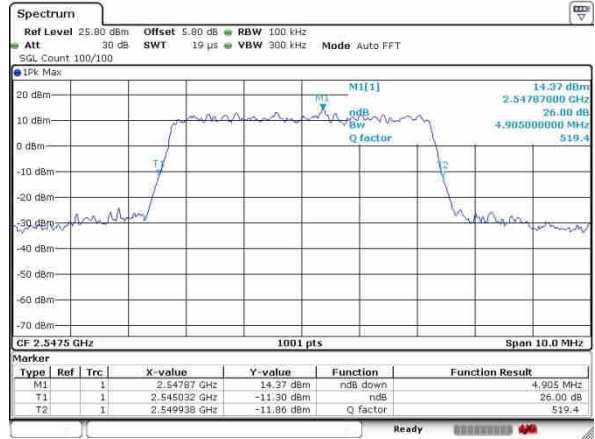


Date: 2 APR 2017 00:21:03

Middle Channel / 5MHz / QPSK

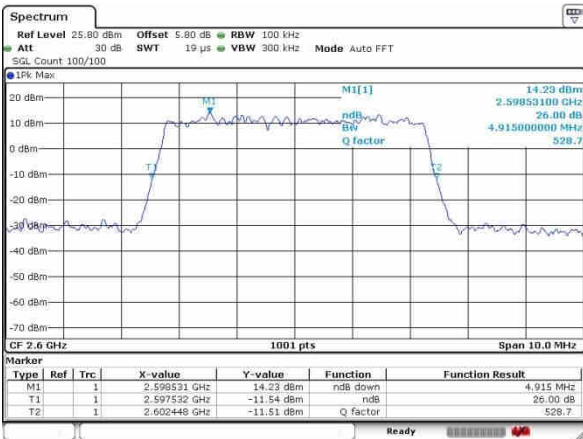


Date: 2 APR 2017 00:21:53

Middle Channel / 5MHz / 16QAM

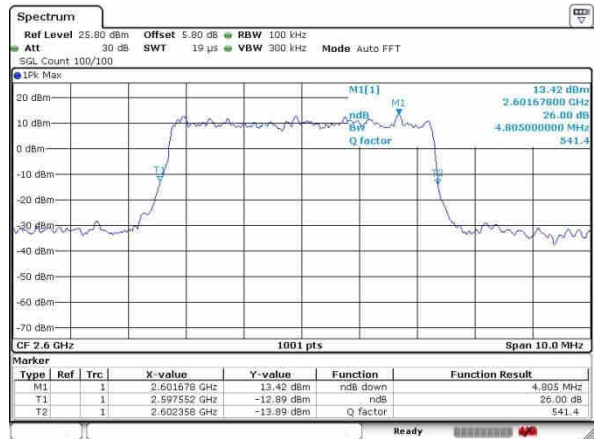


Date: 2 APR 2017 00:21:33

Highest Channel / 5MHz / QPSK

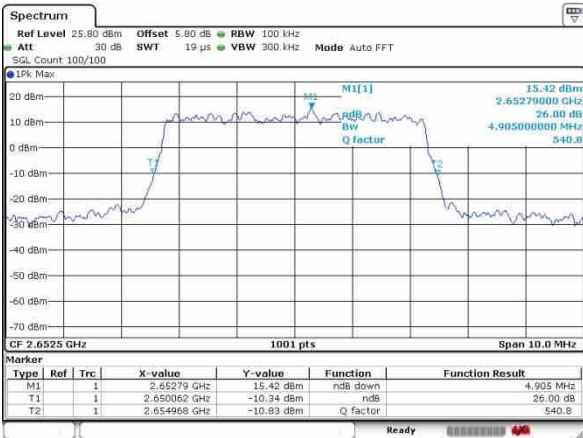

Date: 2 APR 2017 00:22:16

Highest Channel / 5MHz / 16QAM

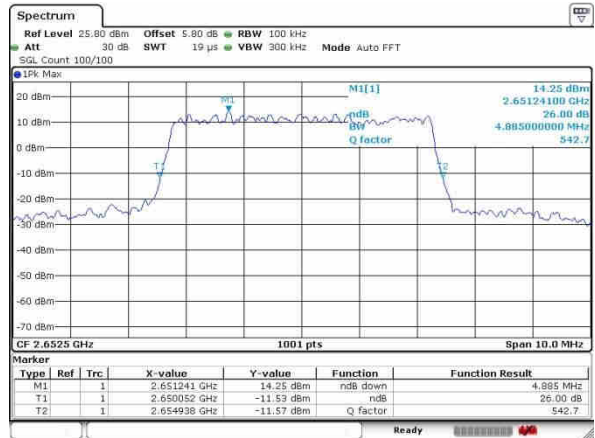

Date: 2 APR 2017 00:22:35




LTE Band 41

Lowest Channel / 10MHz / QPSK




Date: 2 APR 2017 00:28:10

Lowest Channel / 10MHz / 16QAM

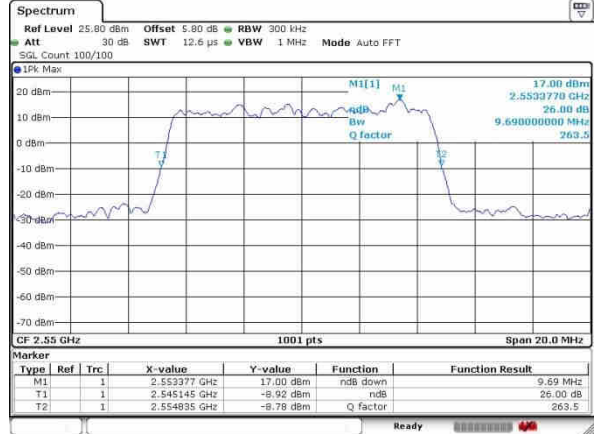


Date: 2 APR 2017 00:28:31

Middle Channel / 10MHz / QPSK

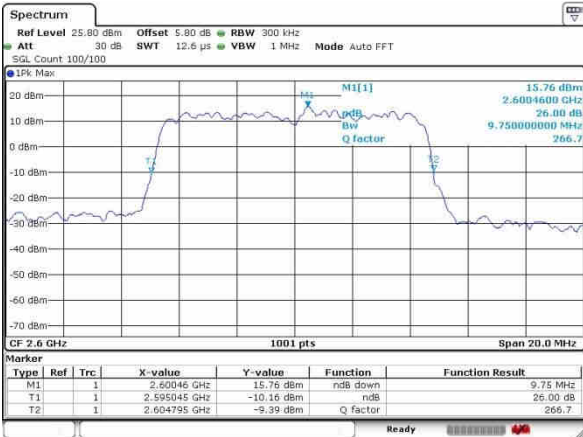


Date: 2 APR 2017 00:27:42

Middle Channel / 10MHz / 16QAM

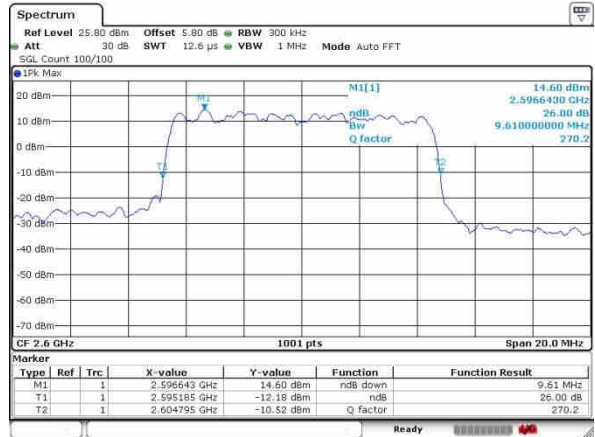


Date: 2 APR 2017 00:27:19

Highest Channel / 10MHz / QPSK

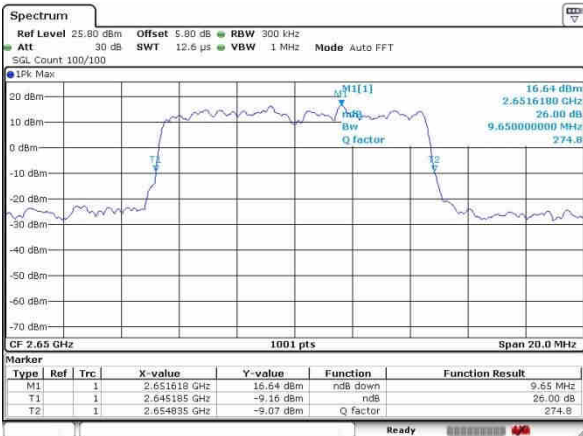

Date: 2 APR 2017 00:26:23

Highest Channel / 10MHz / 16QAM

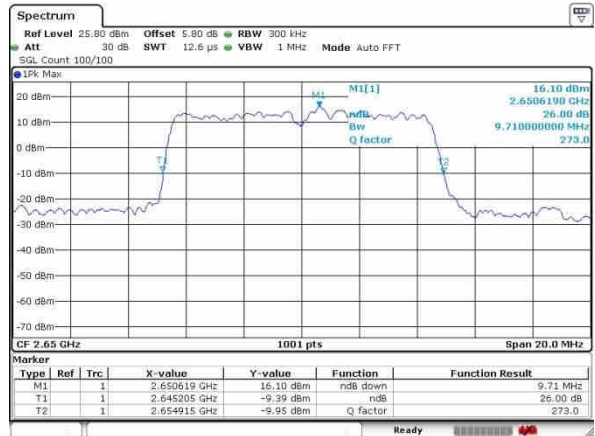

Date: 2 APR 2017 00:26:55