

Chain 0



Chain 1



Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5853.32 PK	65.57	68.2	-2.63	-38.54	-44.02	7.77	-29.69

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

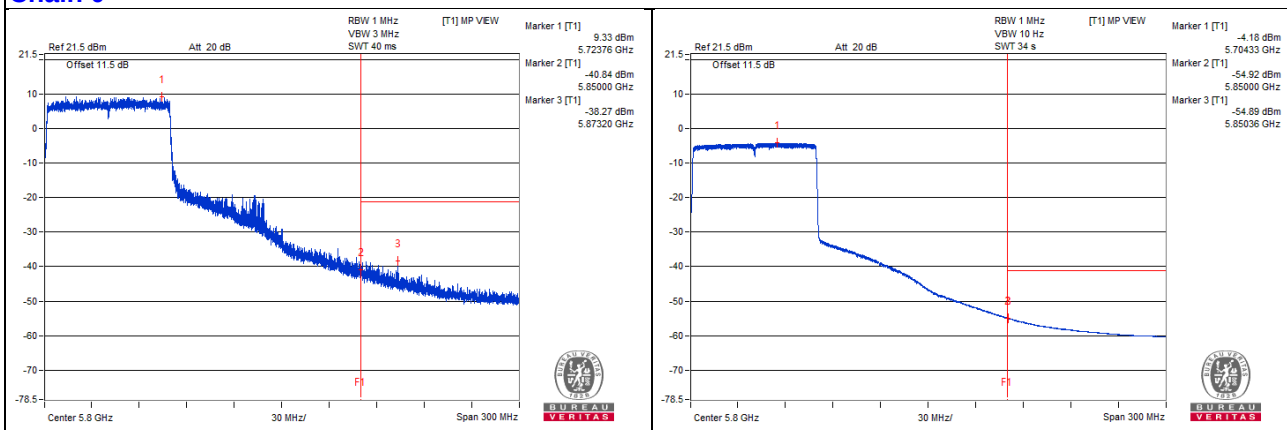

Chain 1

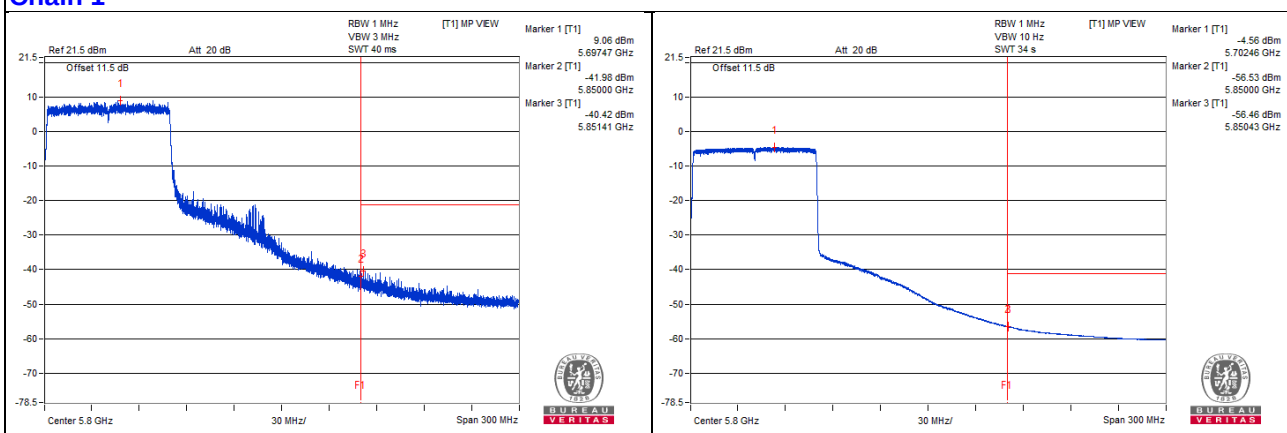

802.11ax (HE80) – Channel 155

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3839.06 PK	55.65	74	-18.35	-50.64	-50.16	7.77	-39.61
2	3832.81 AV	44.01	54	-9.99	-61.81	-62.26	7.77	-51.25
3	7710.93 PK	56.82	74	-17.18	-48.39	-50.26	7.77	-38.44
4	7700 AV	46.46	54	-7.54	-60.25	-59	7.77	-48.8
5	11534.37 PK	55.2	74	-18.8	-50.79	-50.9	7.77	-40.06
6	11535.93 AV	43.4	54	-10.6	-62.74	-62.55	7.77	-51.86
7	17313.68 PK	57.08	68.2	-11.12	-47.2	-51.98	7.77	-38.18

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

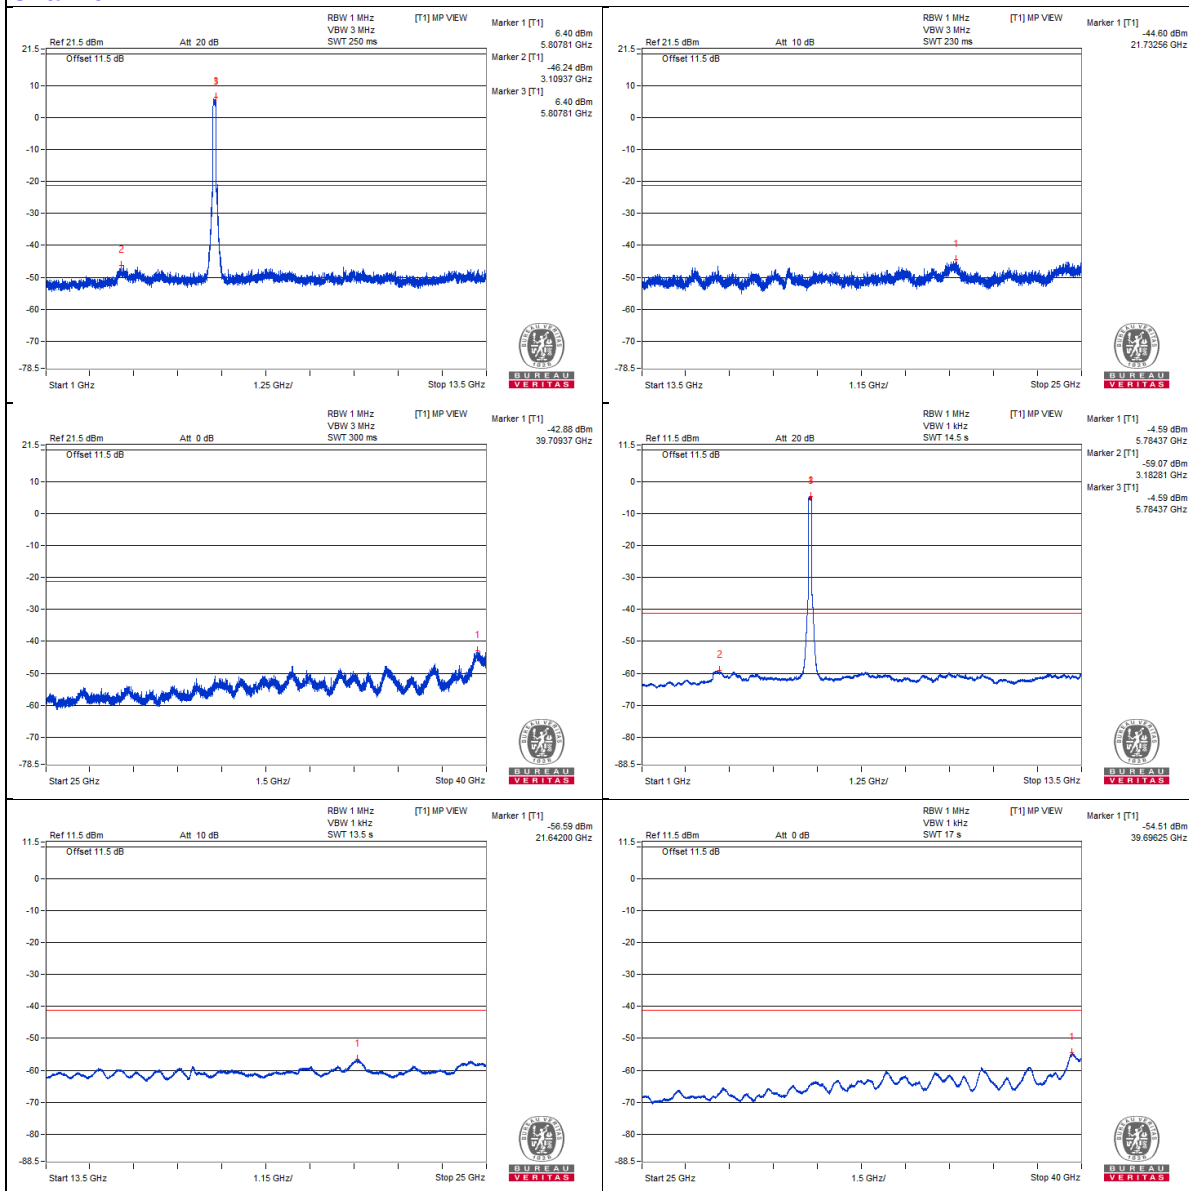


Chain 1

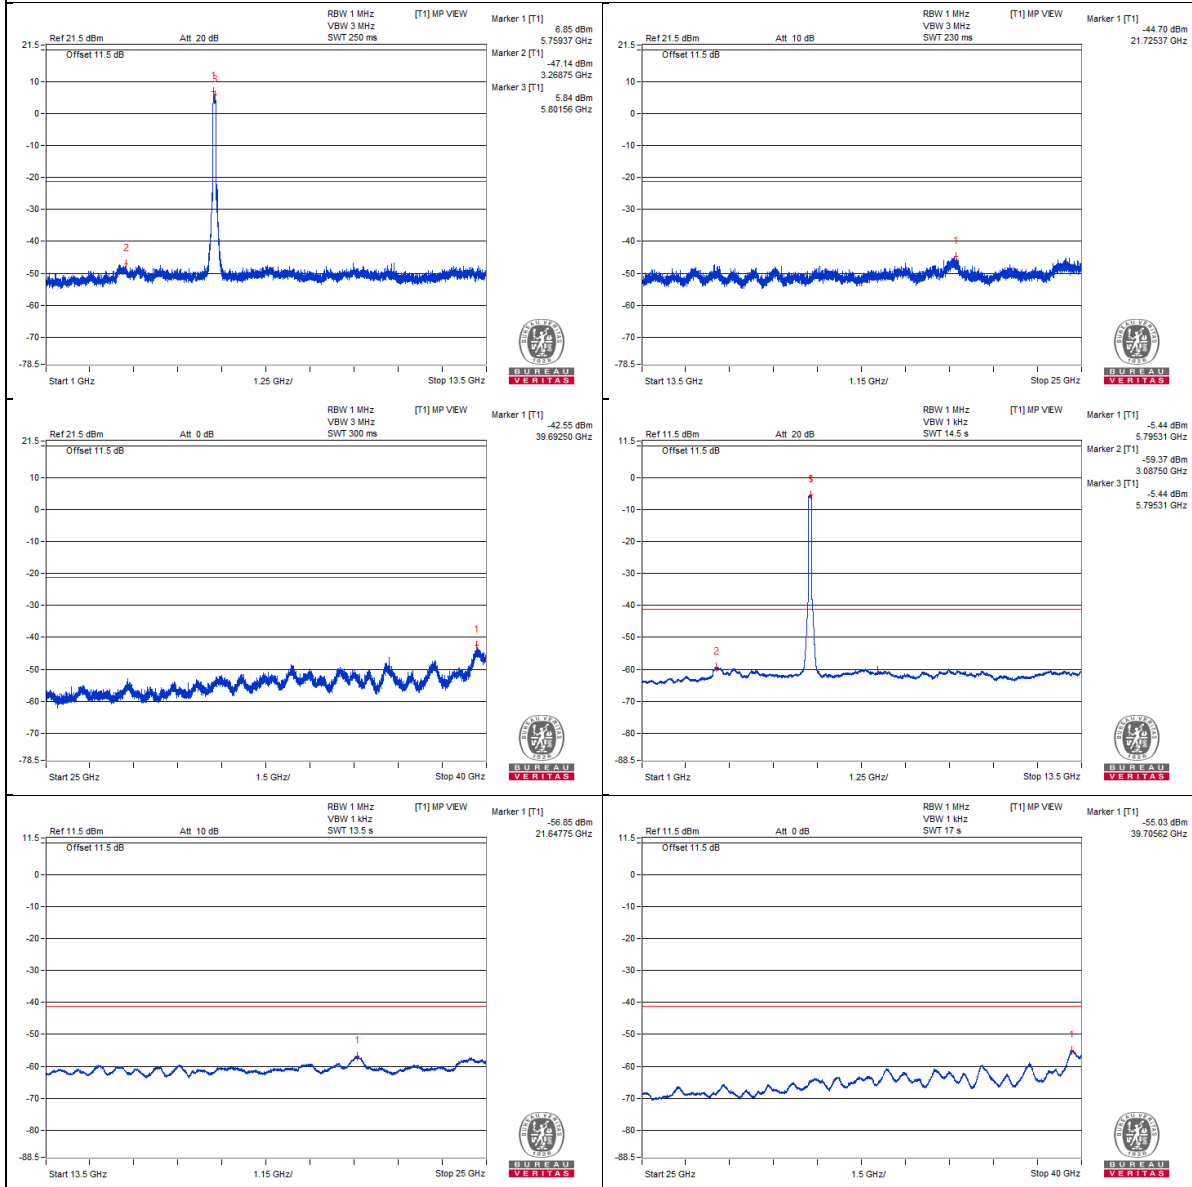


Bandedge table

Chain 0

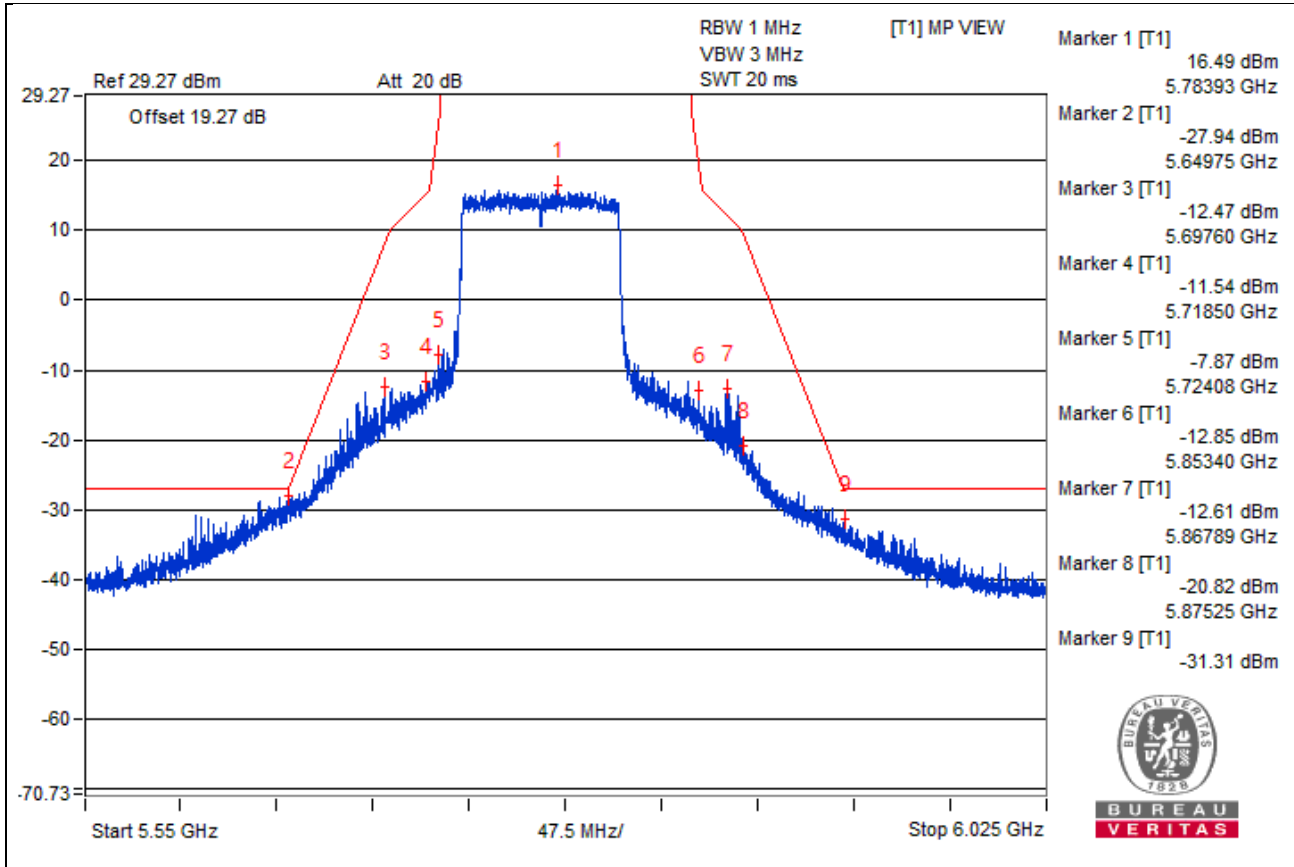

Chain 1

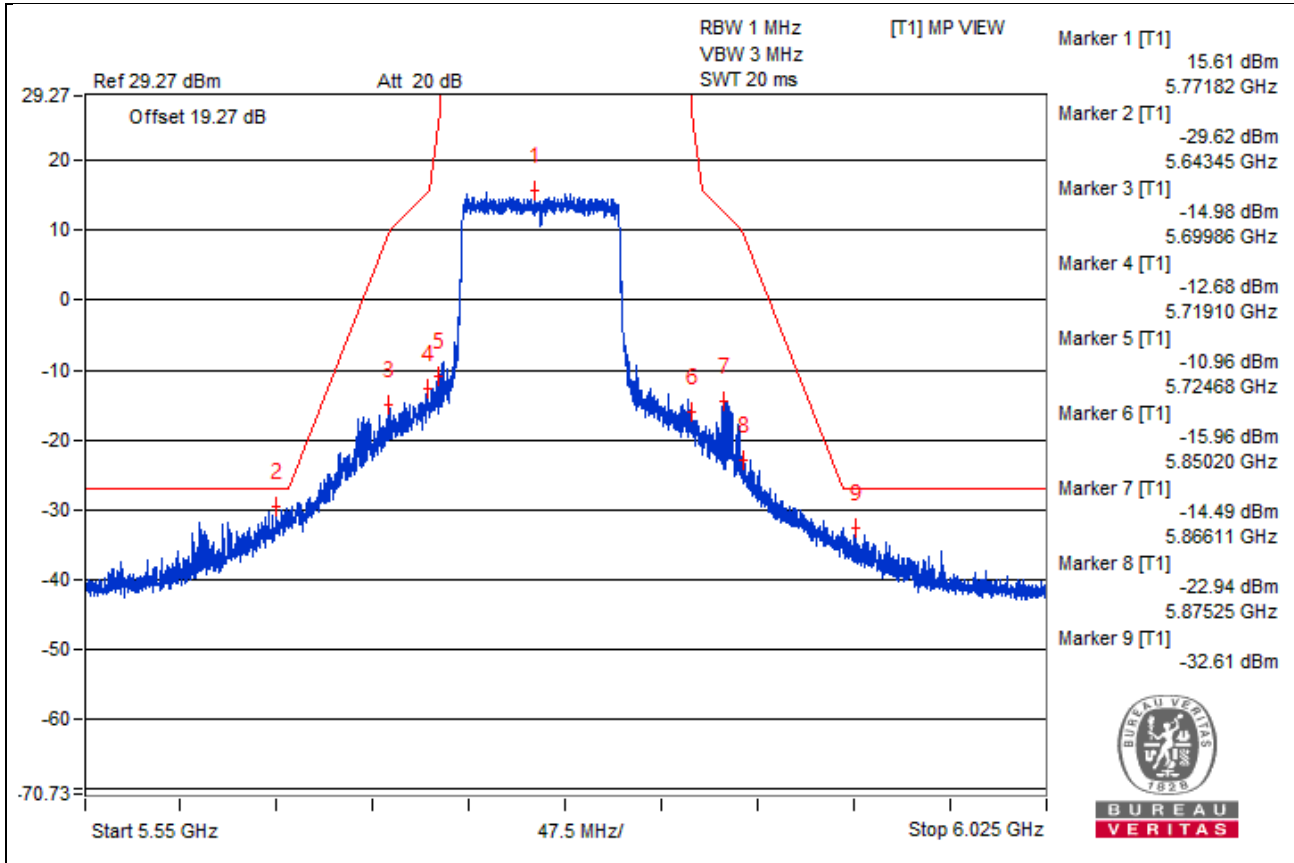

20MHz Preamble

RU26 (Conducted spurious emission) + RU106 (Bandedge)

Channel 36

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3454.68 PK	54.74	68.2	-13.46	-51.07	-48.53	6.09	-40.52
2	6906.25 PK	63.05	68.2	-5.15	-41.14	-41.49	6.09	-32.21
3	10343.75 PK	58.63	68.2	-9.57	-46.55	-45.04	6.09	-36.63
4	15525.43 PK	59.41	74	-14.59	-45.61	-44.38	6.09	-35.85
5	15528.31 AV	39.6	54	-14.4	-64.8	-64.73	6.09	-55.66

Note :







Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

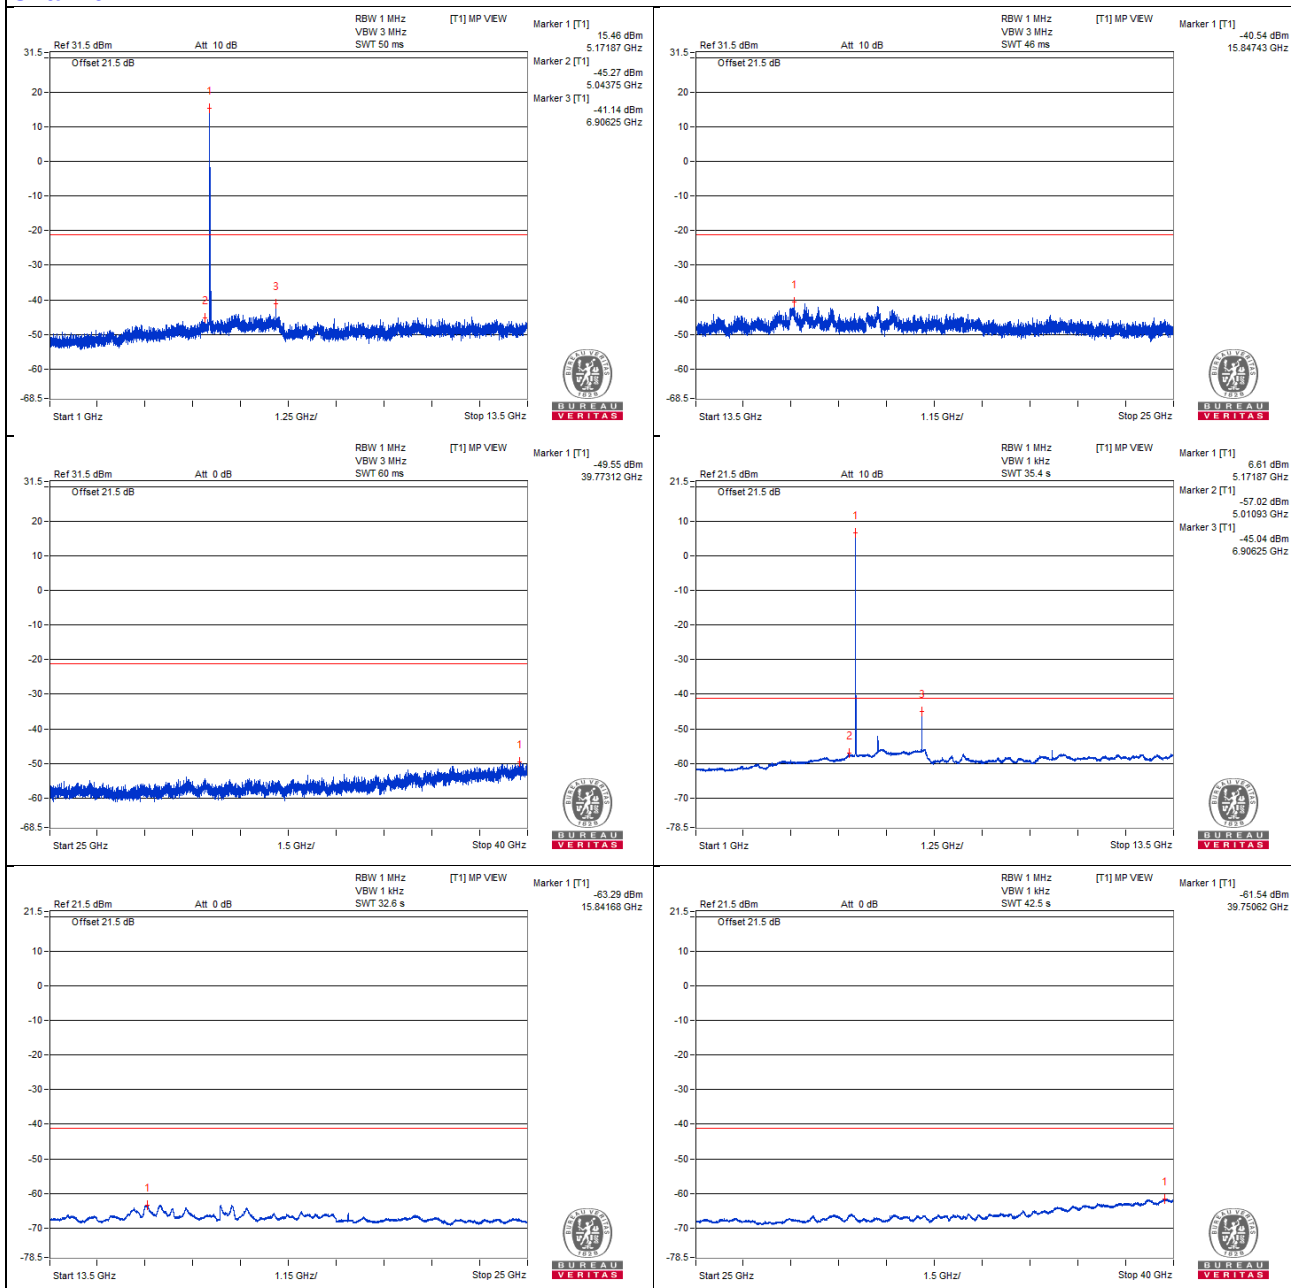

Chain 1

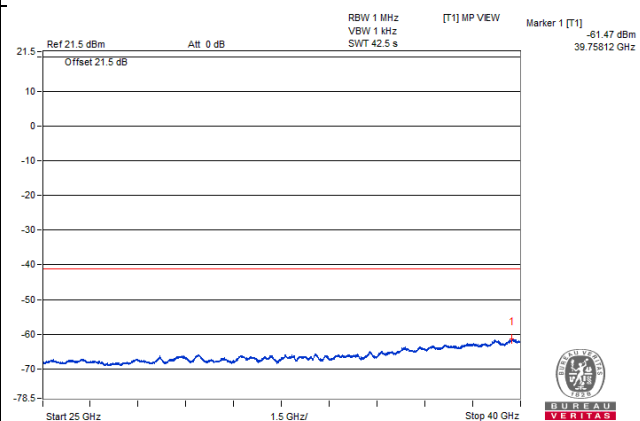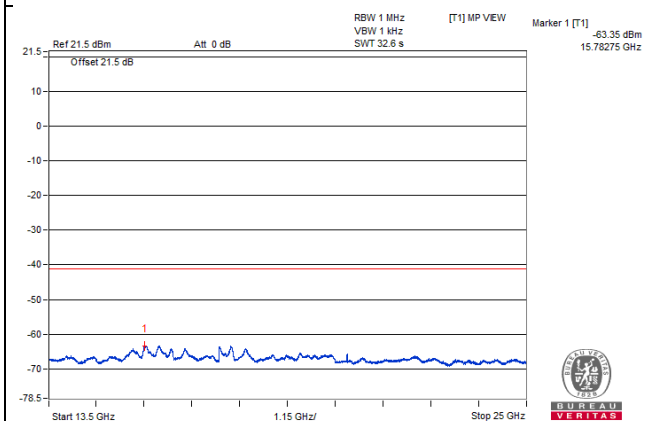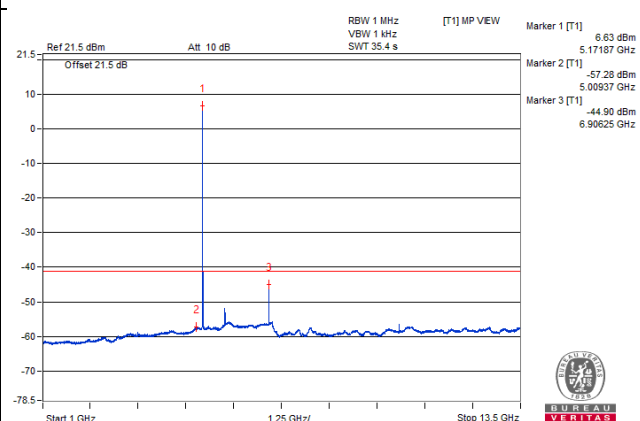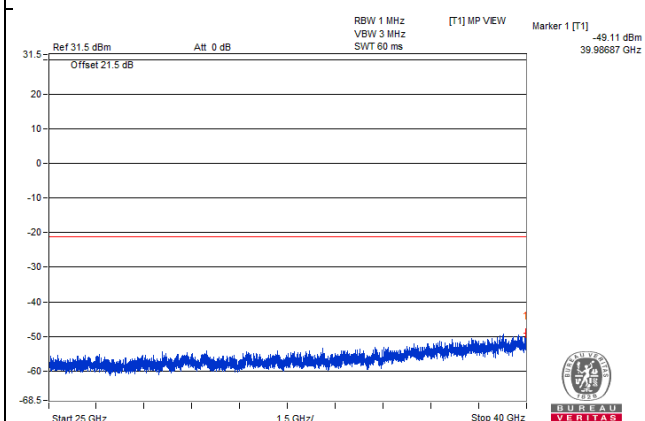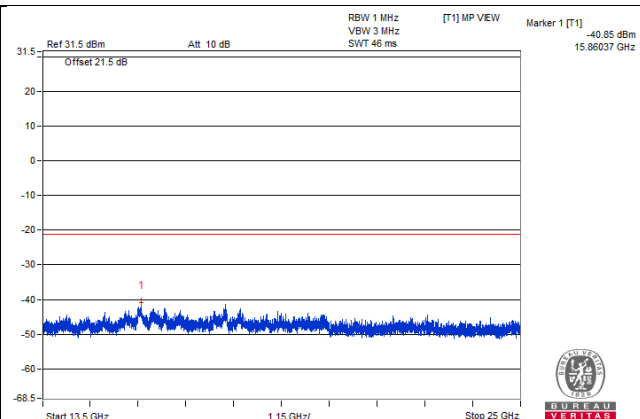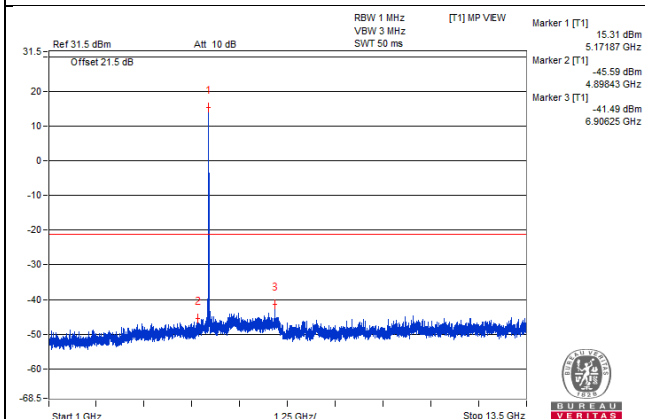

Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5149.85 PK	73.47	74	*-0.53	-30.06	-31.93	6.09	-21.79
2	5051.52 AV	47.22	54	-6.78	-57.14	-57.14	6.09	-48.04


Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8


d = measurement distance in 3 meters.

* The unwanted emission was verified and the test result was passed by radiated measurement.
(Please refer APPENDIX B)

Chain 0

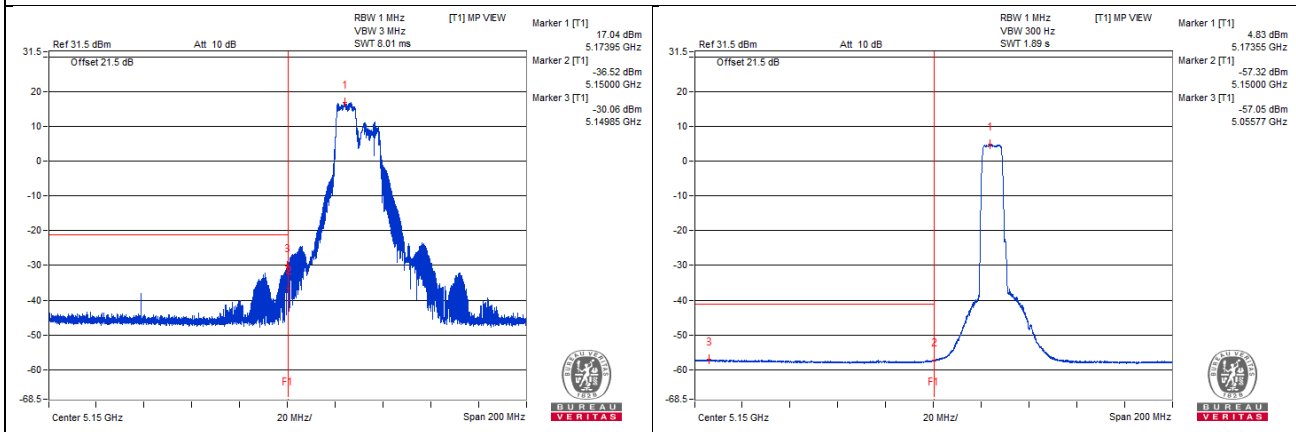

Chain 1

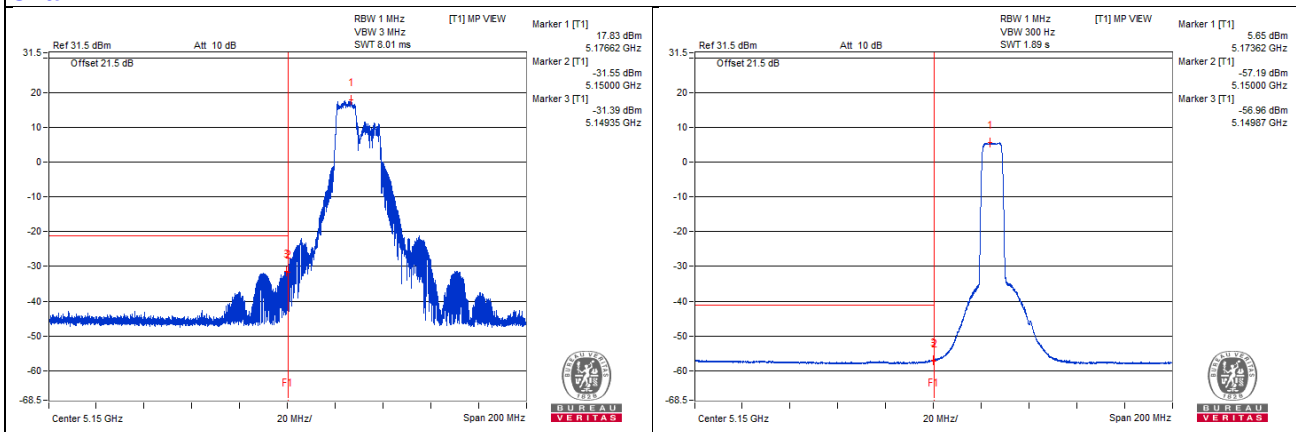

Channel 40

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3465.62 PK	55.92	68.2	-12.28	-48.48	-48.4	6.09	-39.34
2	6932.81 PK	61.24	68.2	-6.96	-45.21	-41.72	6.09	-34.02
3	10384.37 PK	60.23	68.2	-7.97	-48.03	-42.11	6.09	-35.03
4	15598.75 PK	59.48	74	-14.52	-43.99	-46.01	6.09	-35.78
5	15597.31 AV	39.08	54	-14.92	-65.22	-65.34	6.09	-56.18

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

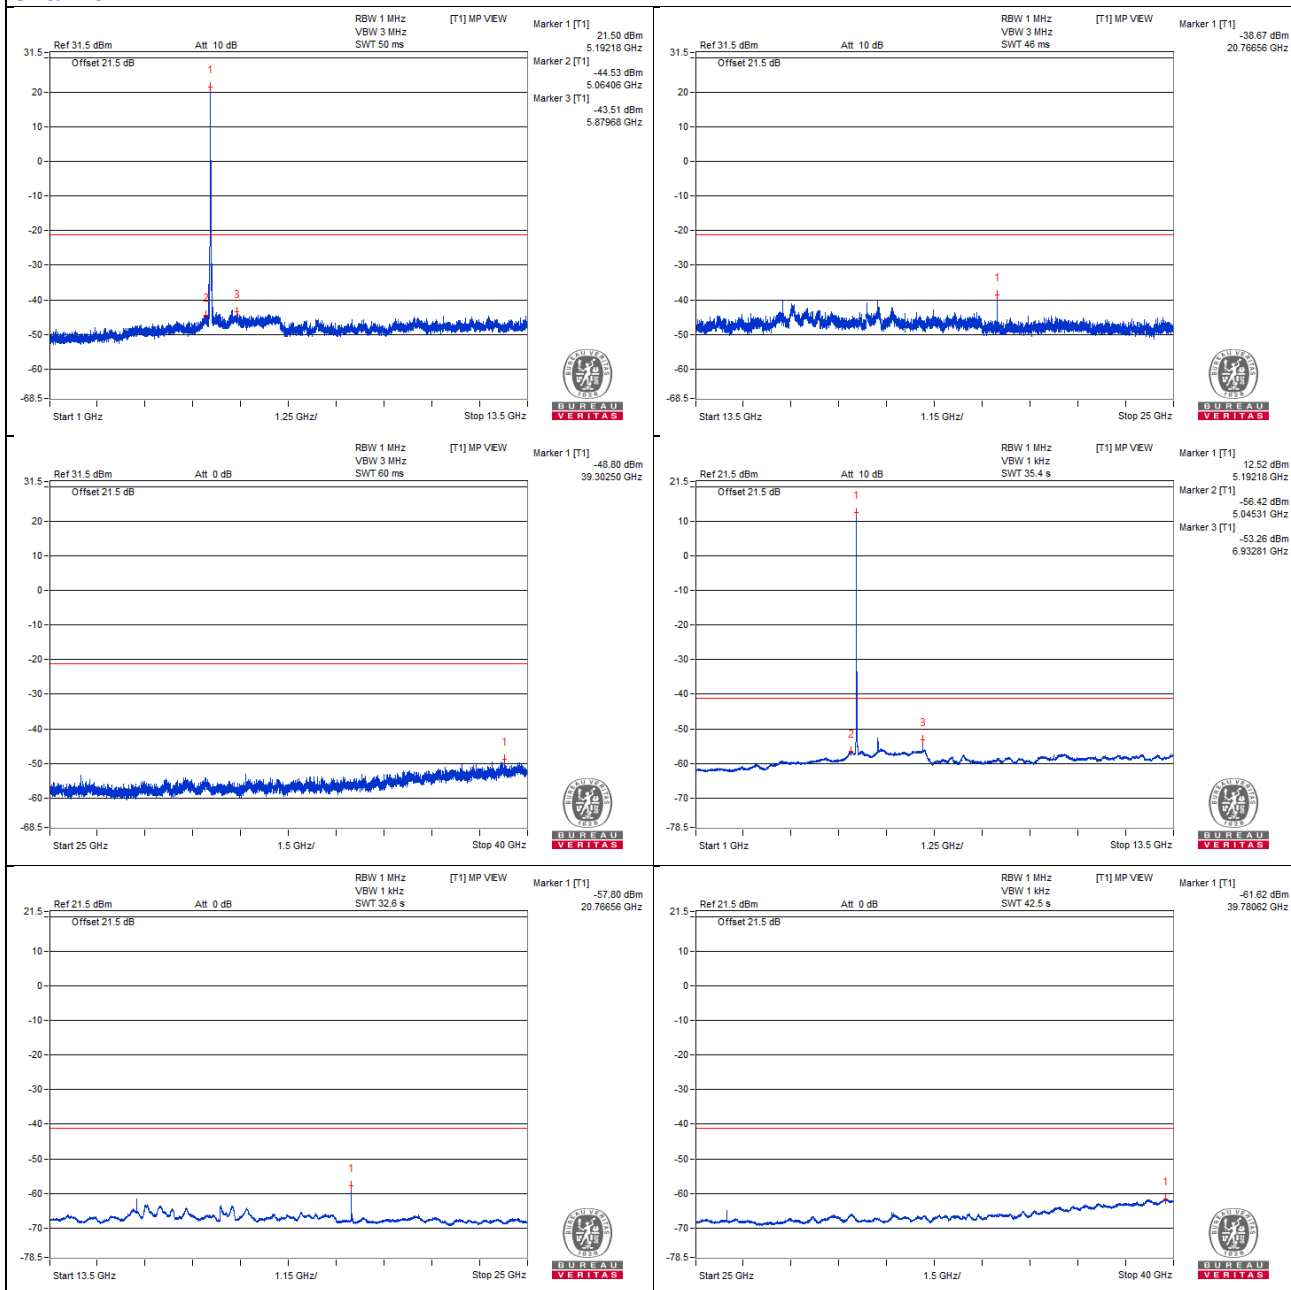

Chain 1

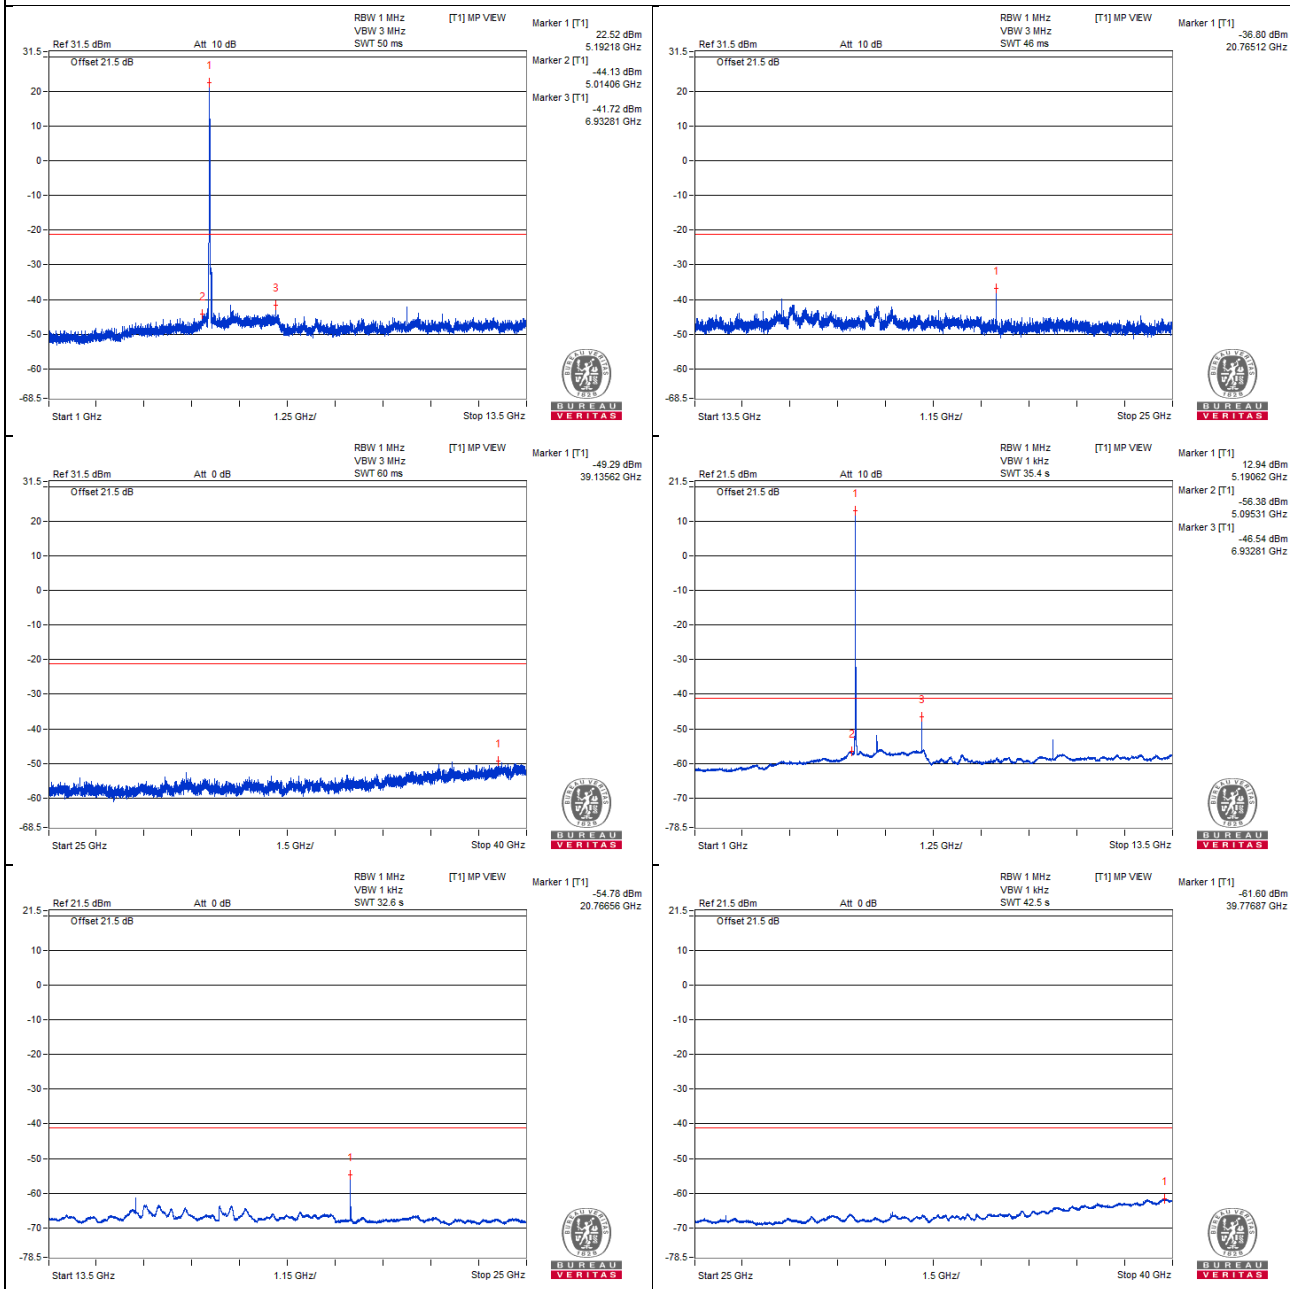

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5149.12 PK	67.15	74	-6.85	-38.88	-36.01	6.09	-28.11
2	5058.27 AV	47.52	54	-6.48	-56.88	-56.8	6.09	-47.74

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

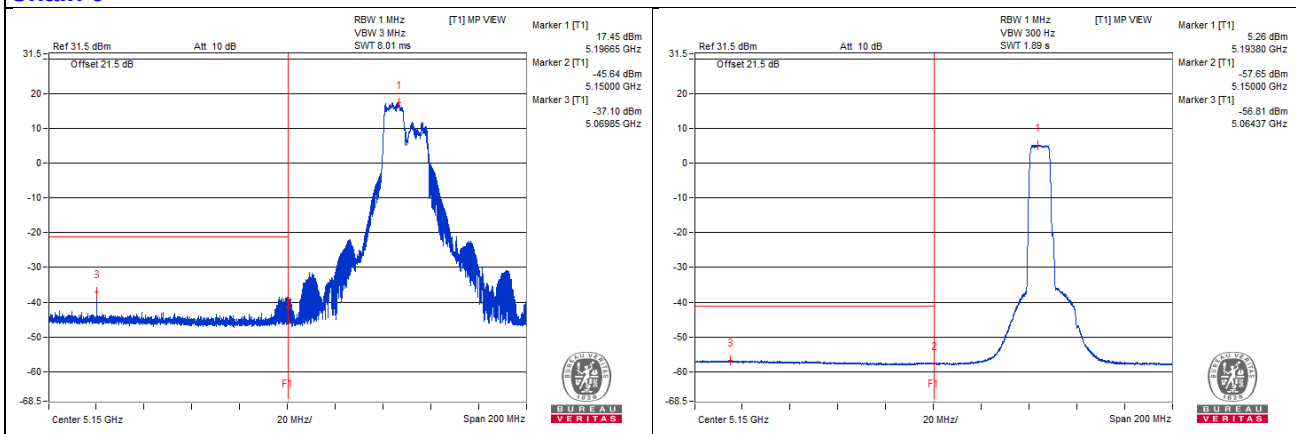

Chain 1

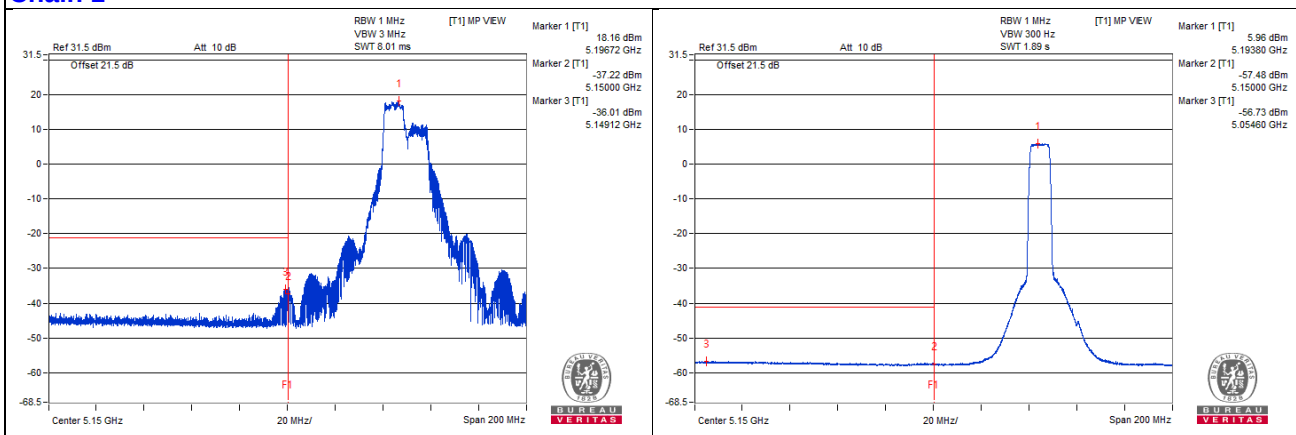

Channel 48

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3492.18 PK	55.6	68.2	-12.6	-48.53	-49	6.09	-39.66
2	6987.5 PK	61.58	68.2	-6.62	-45.22	-41.23	6.09	-33.68
3	10464.06 PK	58.77	68.2	-9.43	-48.27	-43.94	6.09	-36.49
4	15735.31 PK	58.95	74	-15.05	-45.29	-45.54	6.09	-36.31
5	15739.62 AV	38.18	54	-15.82	-66.21	-66.16	6.09	-57.08

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

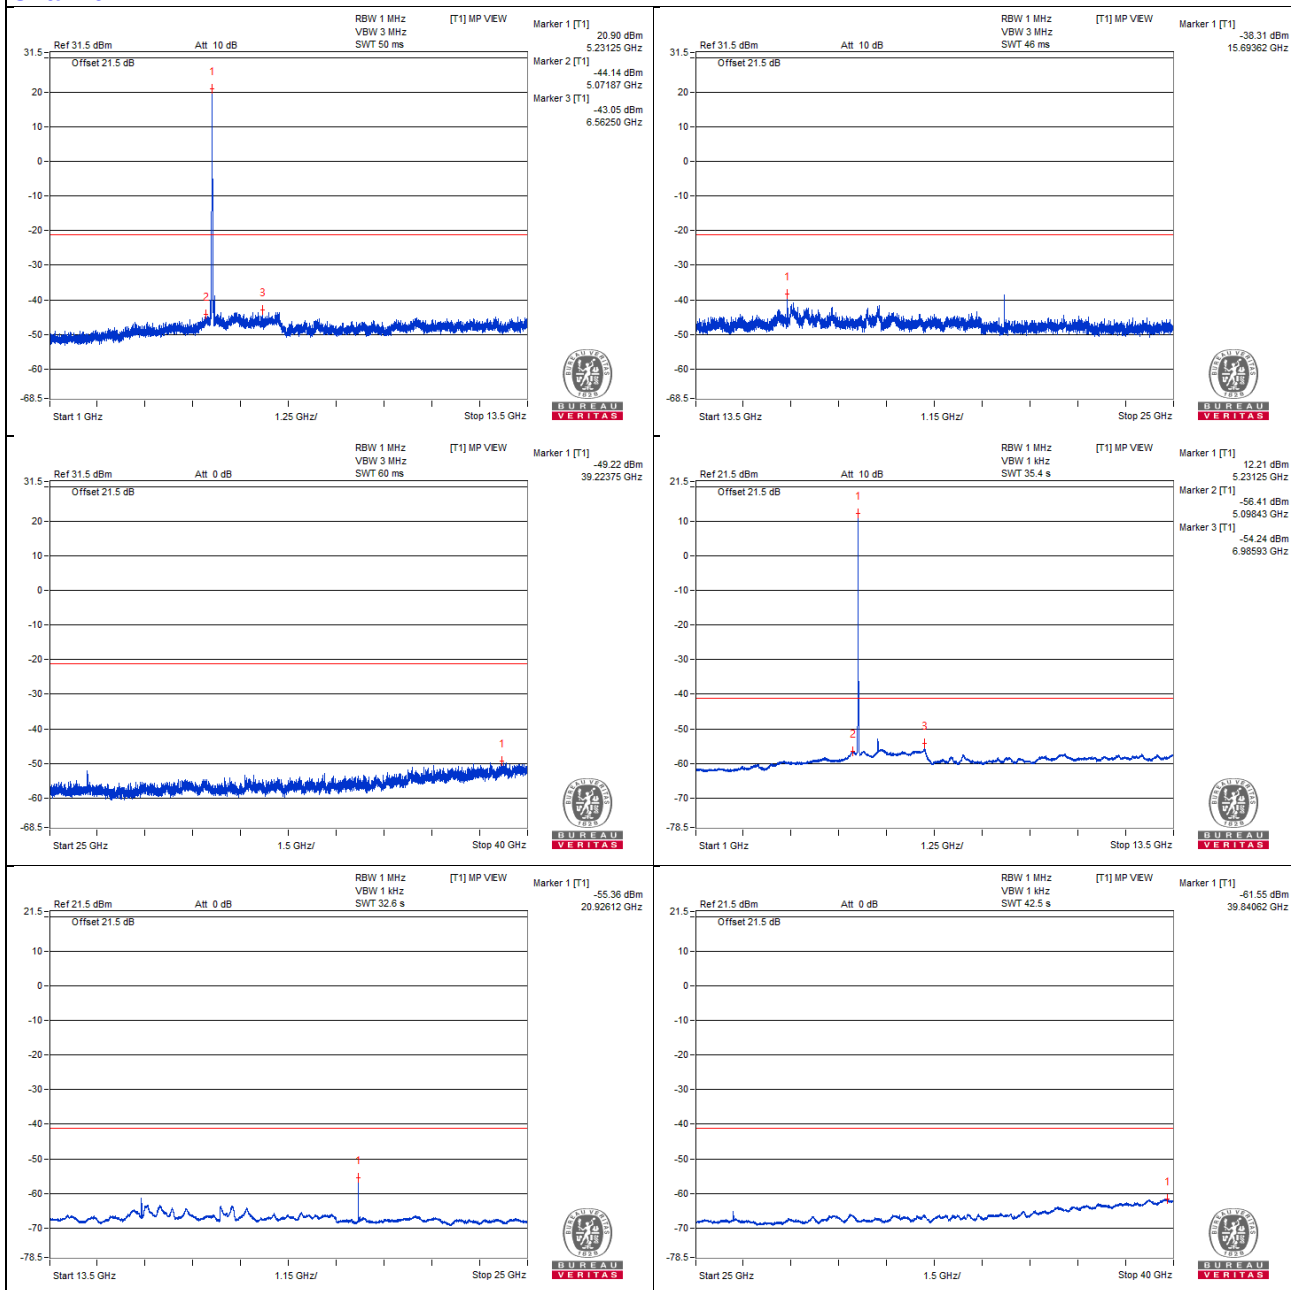

Chain 1

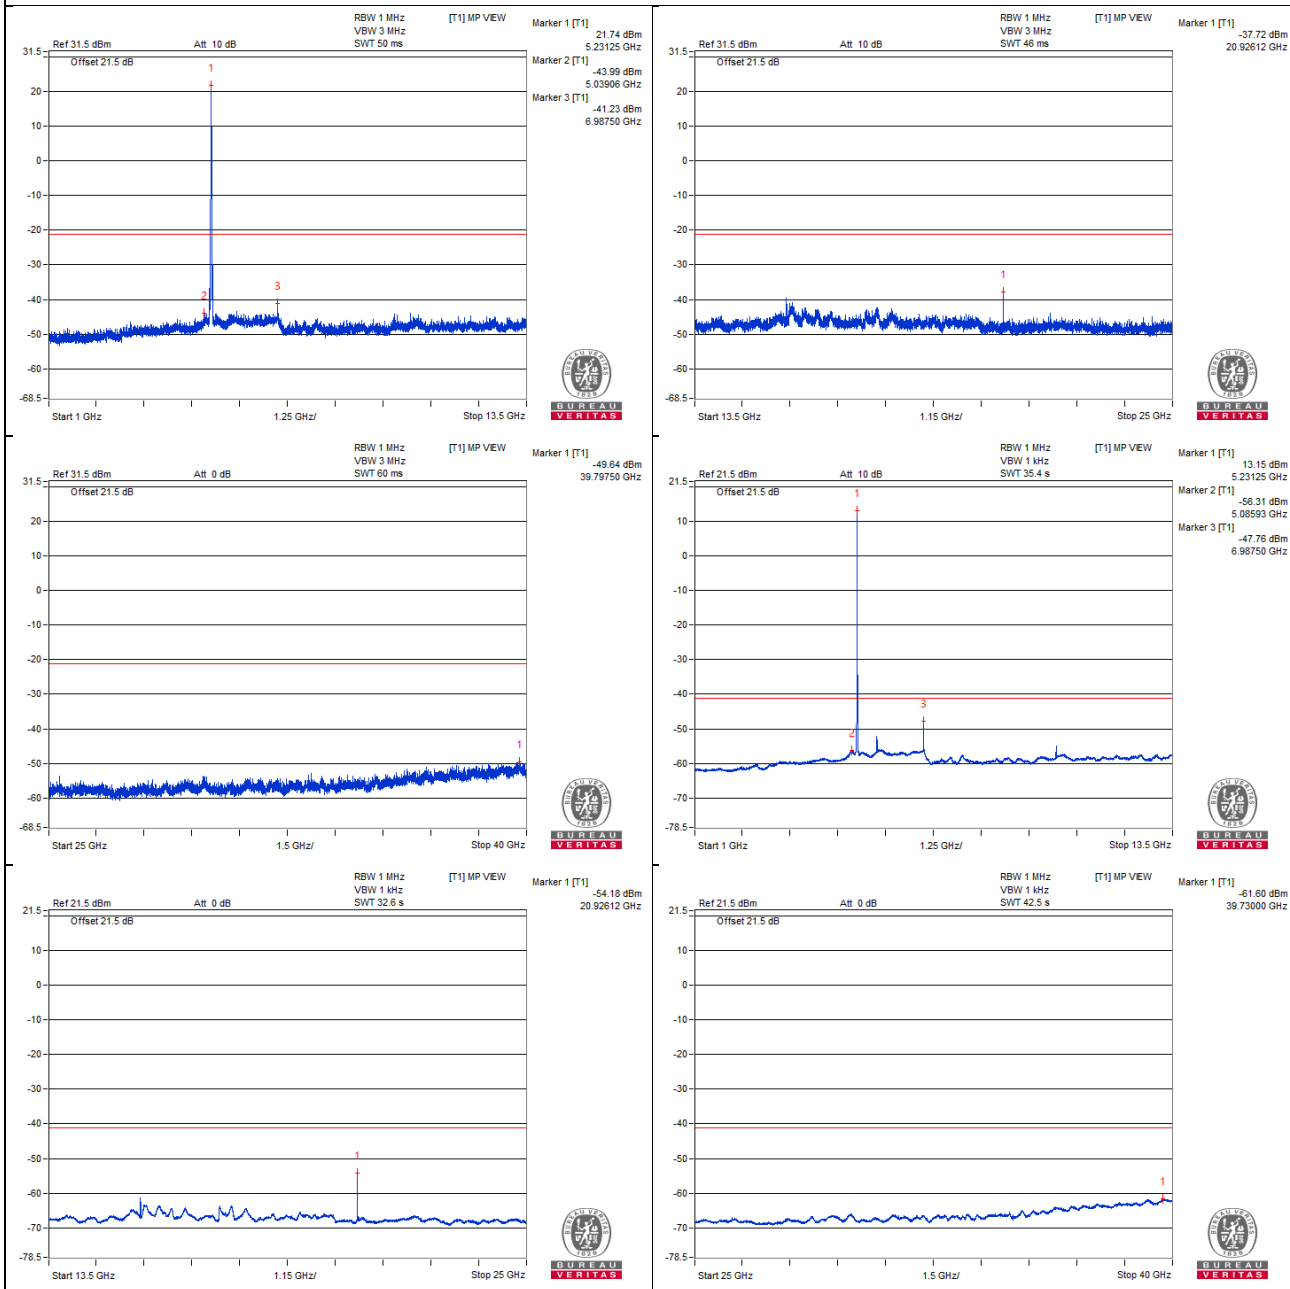

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5096.05 PK	61.09	74	-12.91	-43.36	-43.19	6.09	-34.17
2	5092.5 AV	47.65	54	-6.35	-56.68	-56.75	6.09	-47.61

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

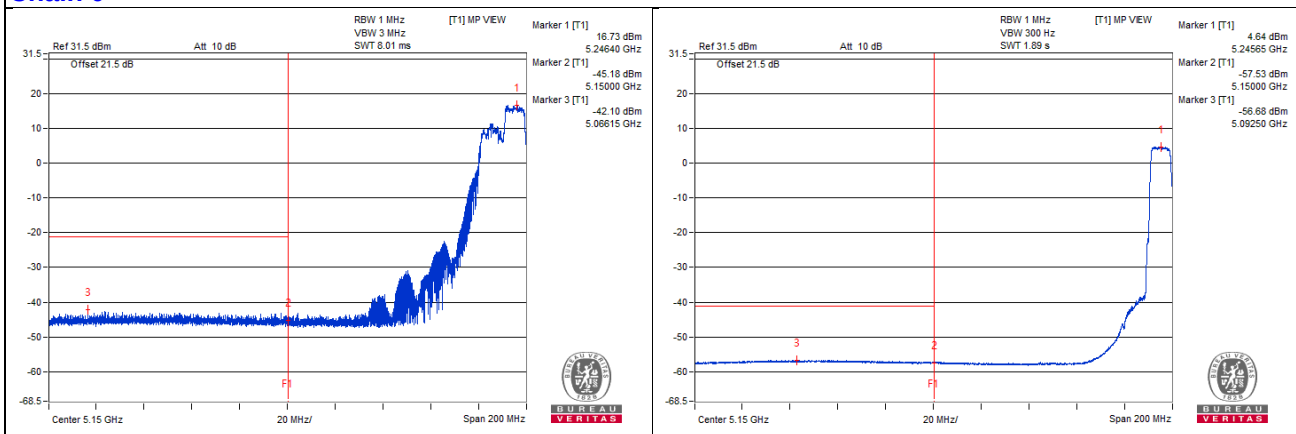

Chain 1

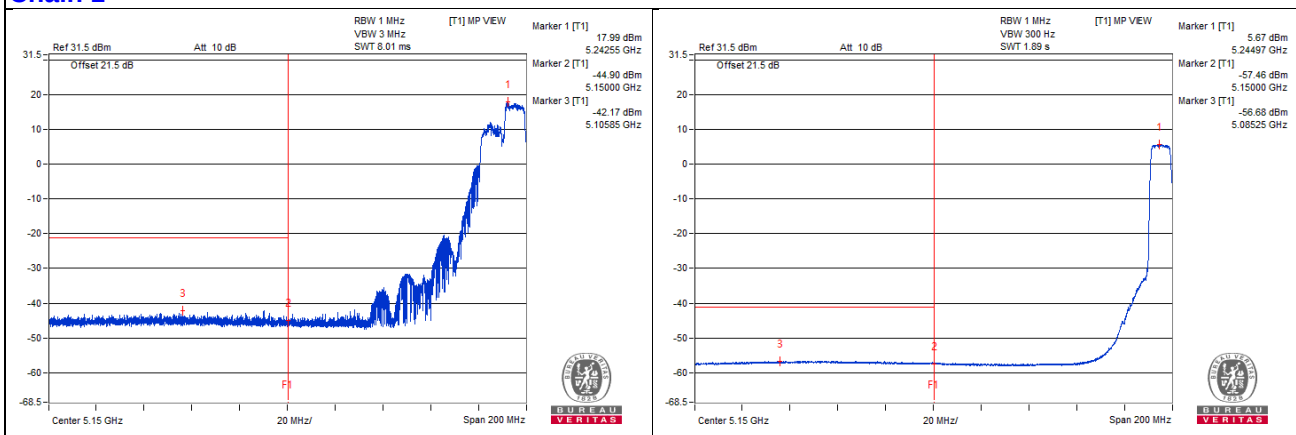

Channel 52

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3507.81 PK	56.02	74	-17.98	-48.27	-48.41	6.09	-39.24
2	3506.25 AV	44.31	54	-9.69	-59.92	-60.19	6.09	-50.95
3	7014.06 PK	60.94	68.2	-7.26	-46.34	-41.69	6.09	-34.32
4	10525 PK	58.26	68.2	-9.94	-46.68	-45.59	6.09	-37
5	15792.81 PK	62.14	74	-11.86	-42.21	-42.24	6.09	-33.12
6	15784.18 AV	40.72	54	-13.28	-63.73	-63.55	6.09	-54.54

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

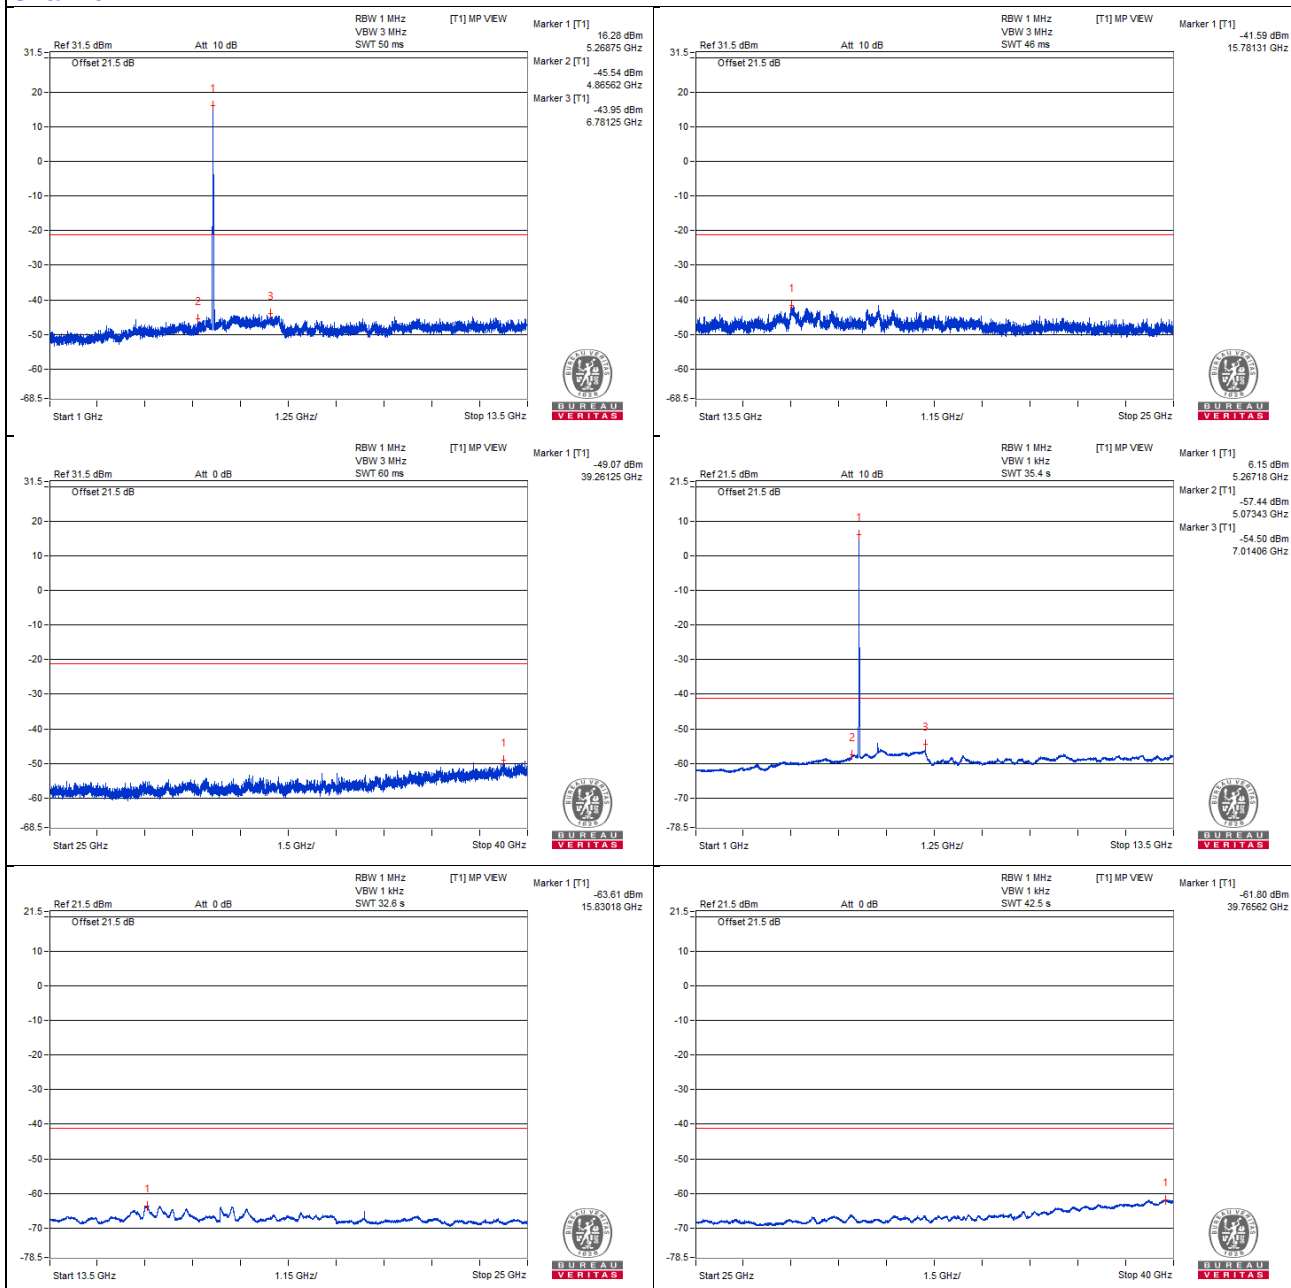

Chain 1

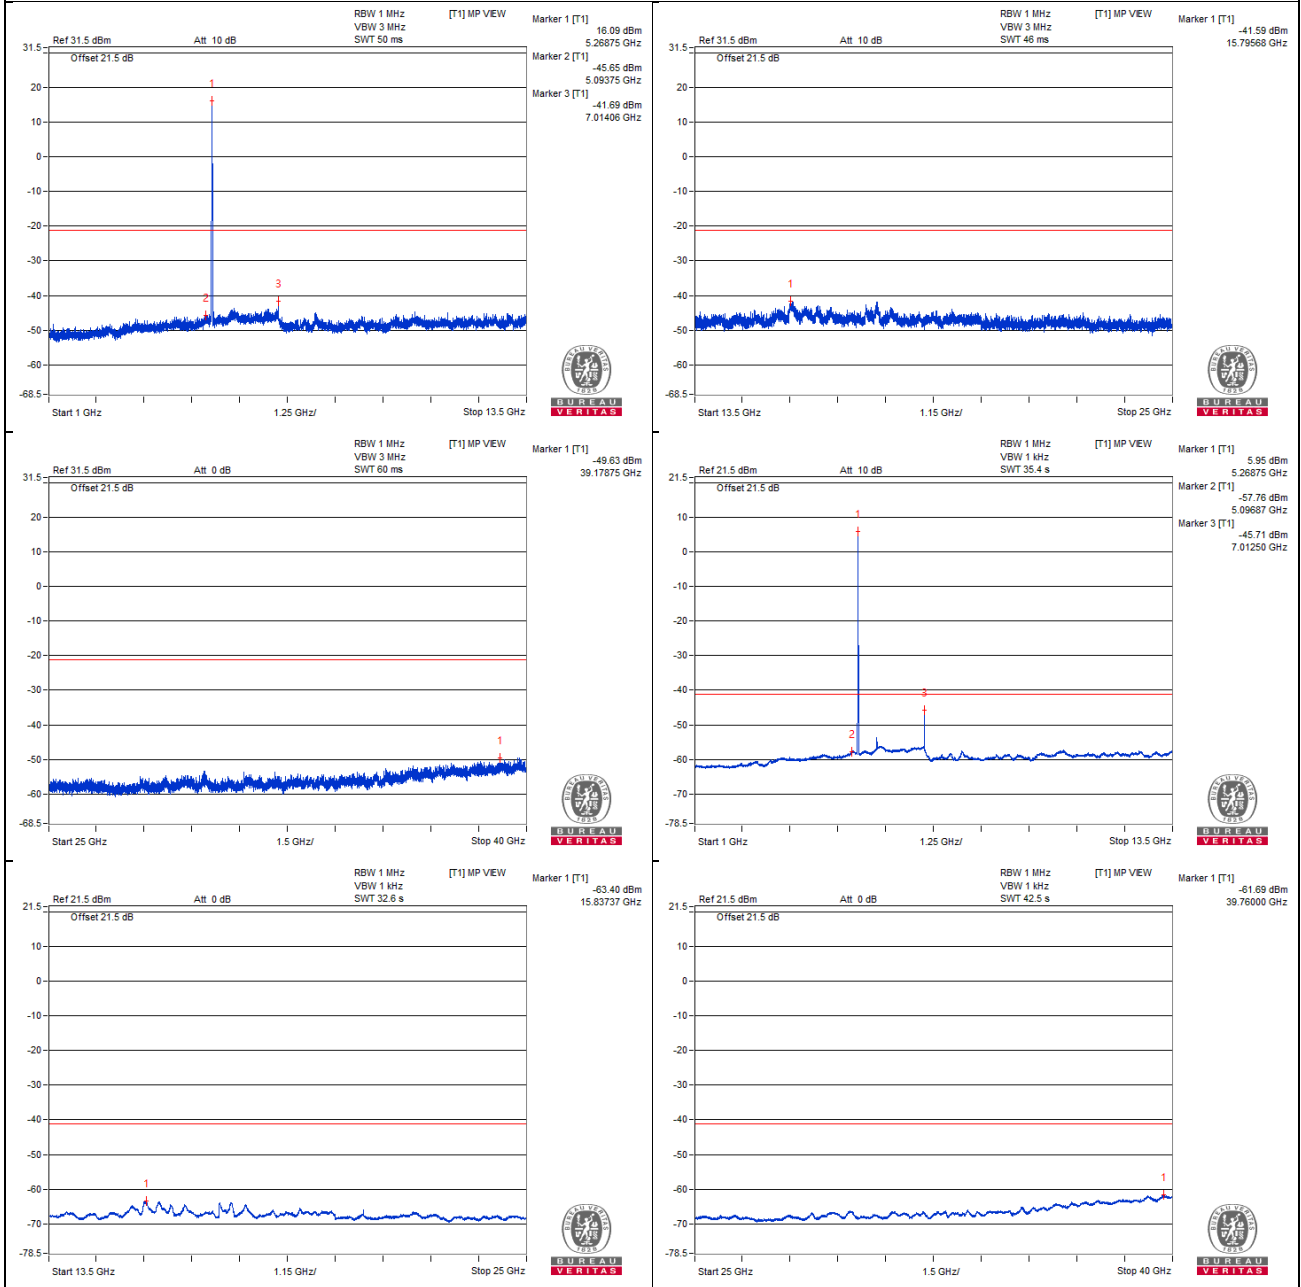

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5376.97 PK	60.72	74	-13.28	-44.23	-43.12	6.09	-34.54
2	5403.5 AV	47.49	54	-6.51	-56.78	-56.97	6.09	-47.77

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

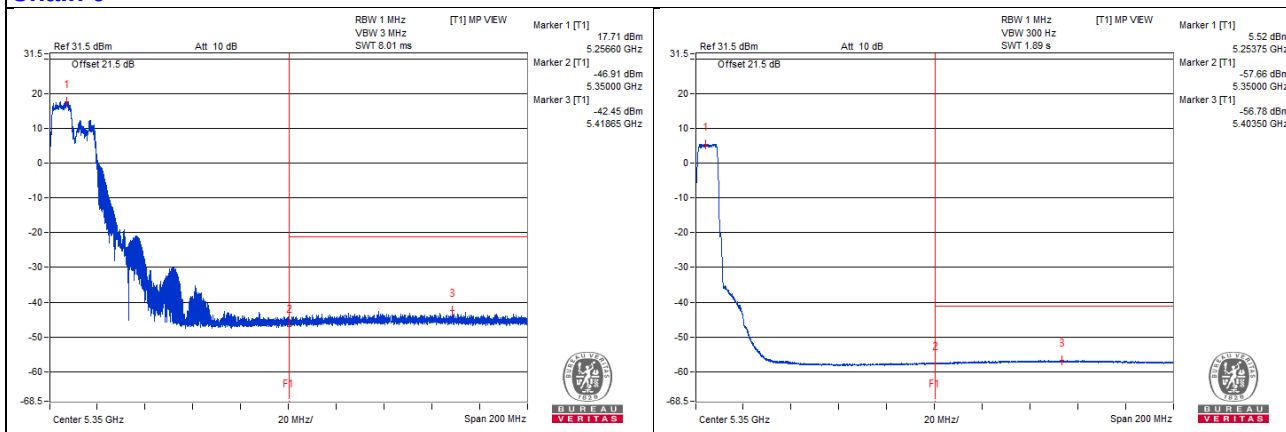

Chain 1

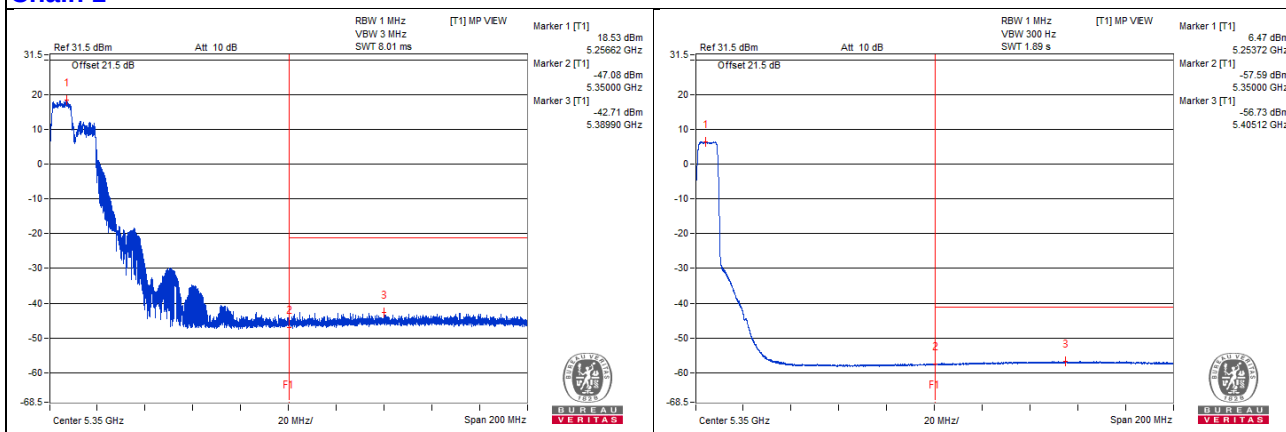

Channel 60

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3534.37 PK	56.04	74	-17.96	-48.79	-47.9	6.09	-39.22
2	3534.37 AV	44.28	54	-9.72	-60.14	-60.03	6.09	-50.98
3	7067.18 PK	59.9	68.2	-8.3	-47.17	-42.8	6.09	-35.36
4	10582.81 PK	58.18	68.2	-10.02	-45.26	-47.36	6.09	-37.08
5	15909.25 PK	60.5	74	-13.5	-42.87	-45.14	6.09	-34.76
6	15890.56 AV	39.07	54	-14.93	-65.14	-65.45	6.09	-56.19

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

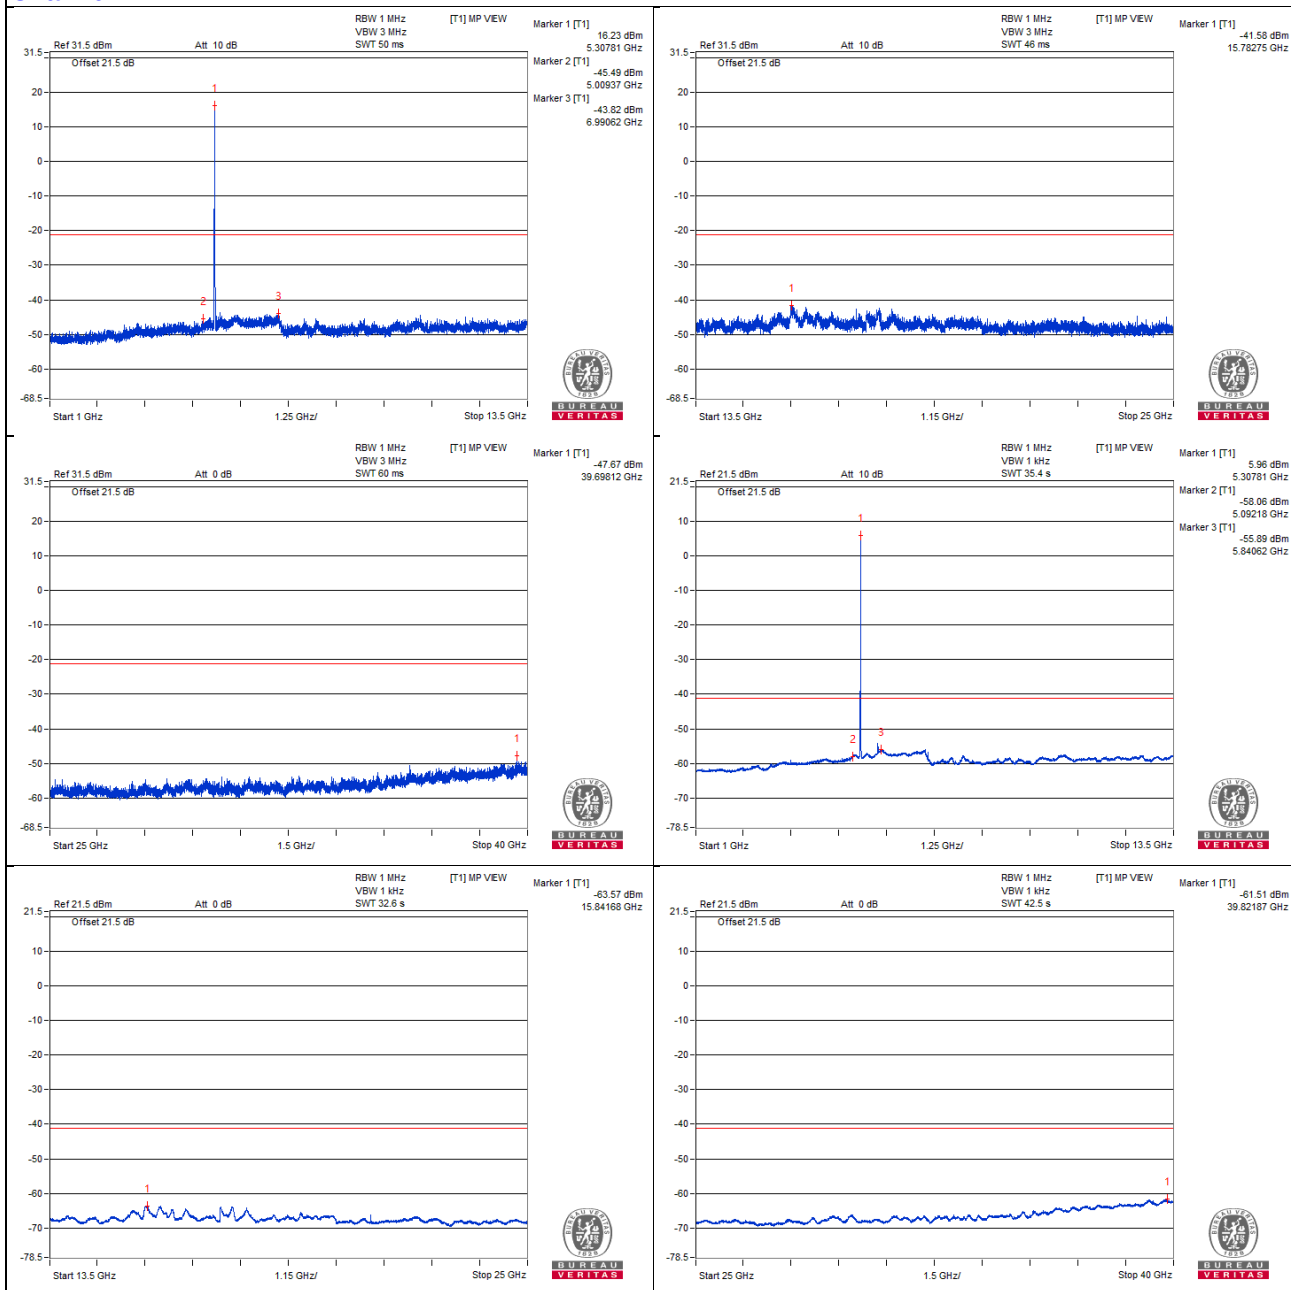

Chain 1

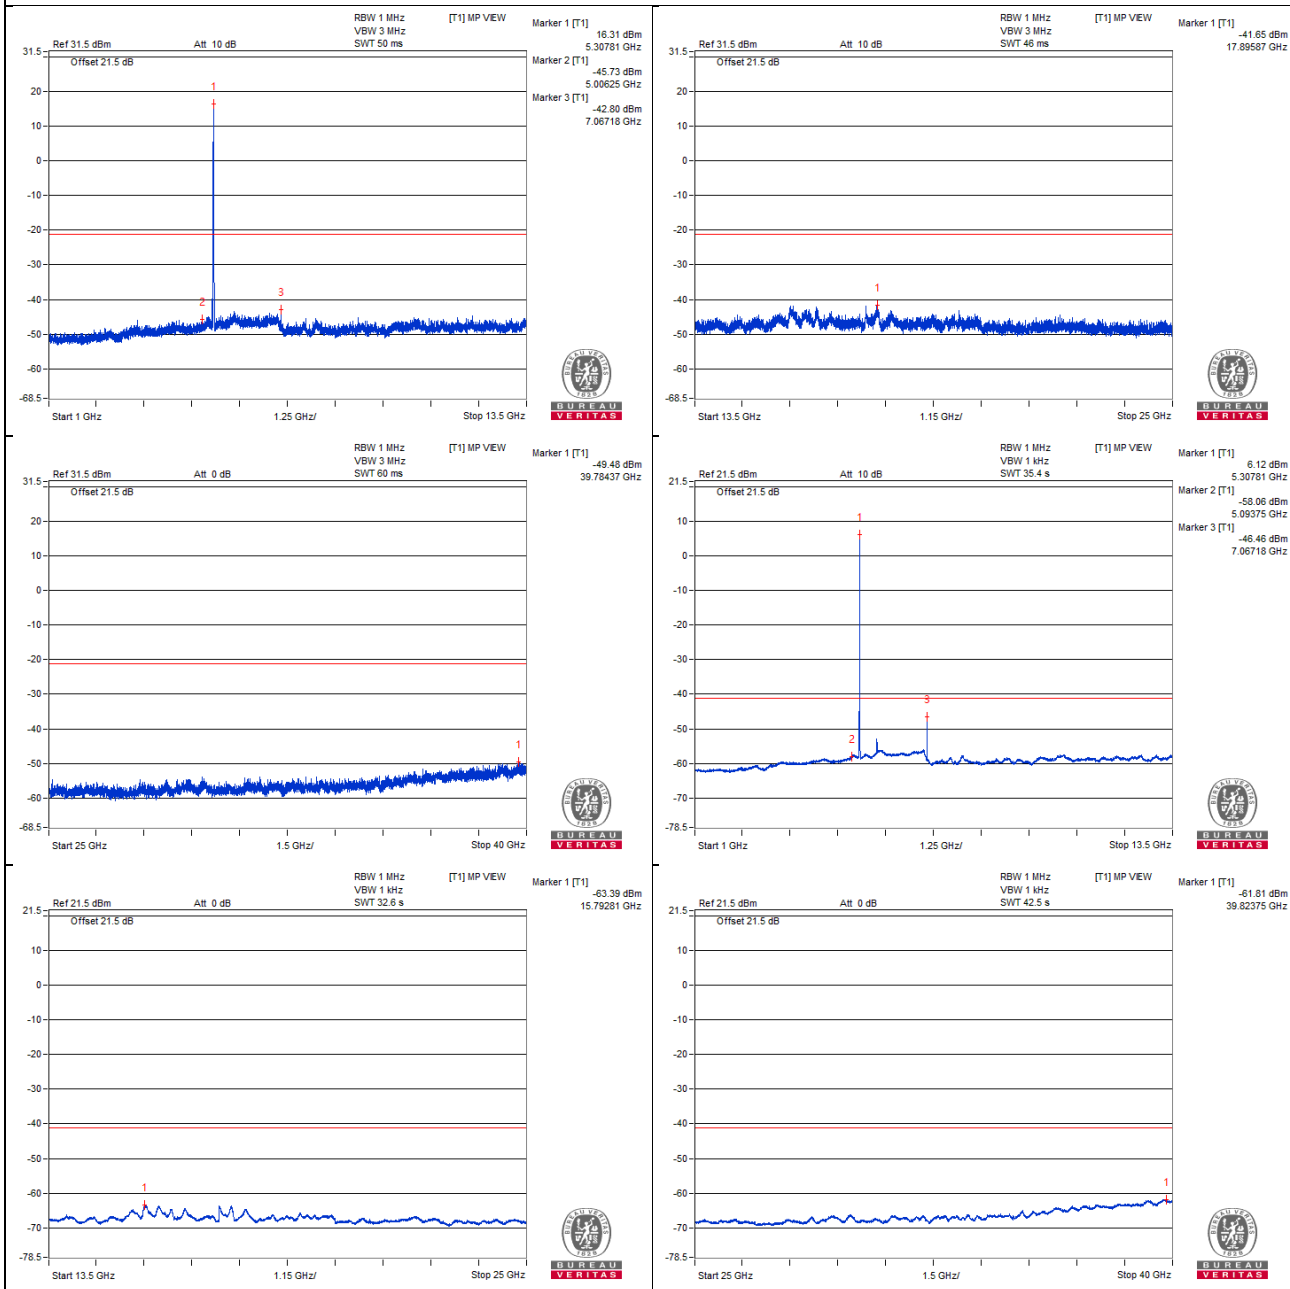

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5351.3 PK	68.23	74	-5.77	-36.77	-35.58	6.09	-27.03
2	5446.6 AV	47.6	54	-6.4	-56.56	-56.98	6.09	-47.66

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

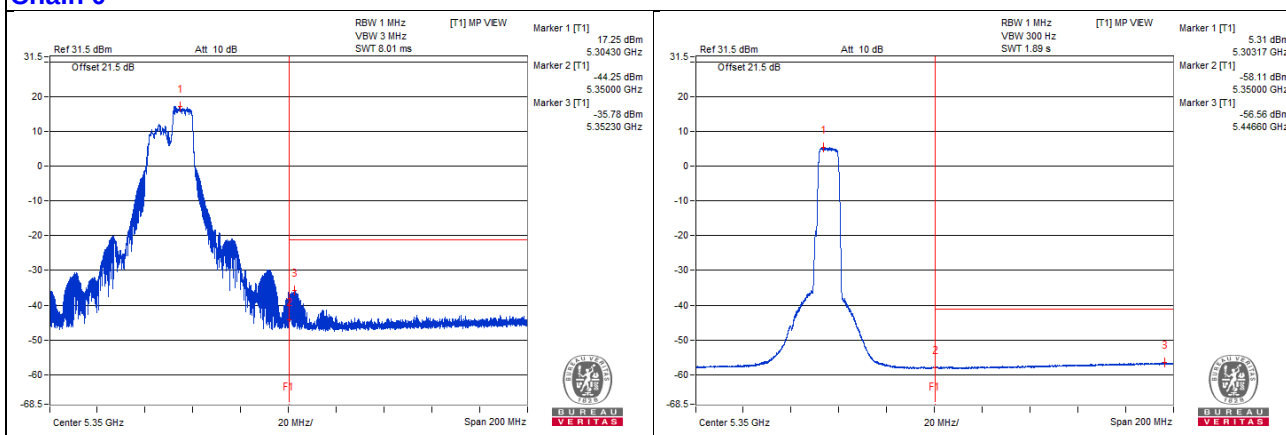

Chain 1

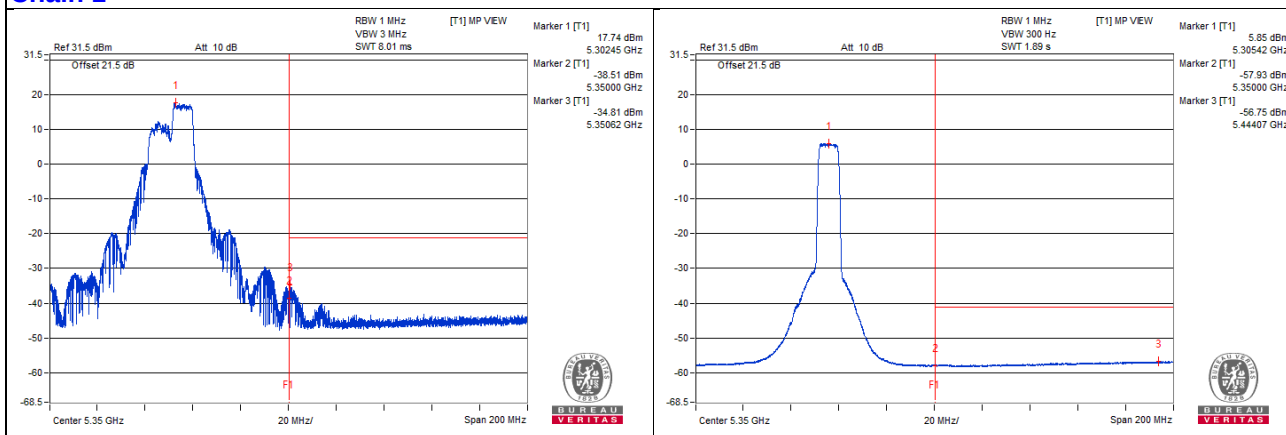

Channel 64

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3545.31 PK	55.2	74	-18.8	-49.58	-48.77	6.09	-40.06
2	3546.87 AV	44.27	54	-9.73	-59.89	-60.29	6.09	-50.99
3	7093.75 PK	59.99	68.2	-8.21	-46.49	-42.95	6.09	-35.27
4	10648.43 PK	58.7	74	-15.3	-47.79	-44.24	6.09	-36.56
5	10626.56 AV	46.69	54	-7.31	-57.55	-57.8	6.09	-48.57
6	15945.18 PK	59.35	74	-14.65	-44.94	-45.08	6.09	-35.91
7	15943.75 AV	38.48	54	-15.52	-65.88	-65.88	6.09	-56.78

Note :







Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

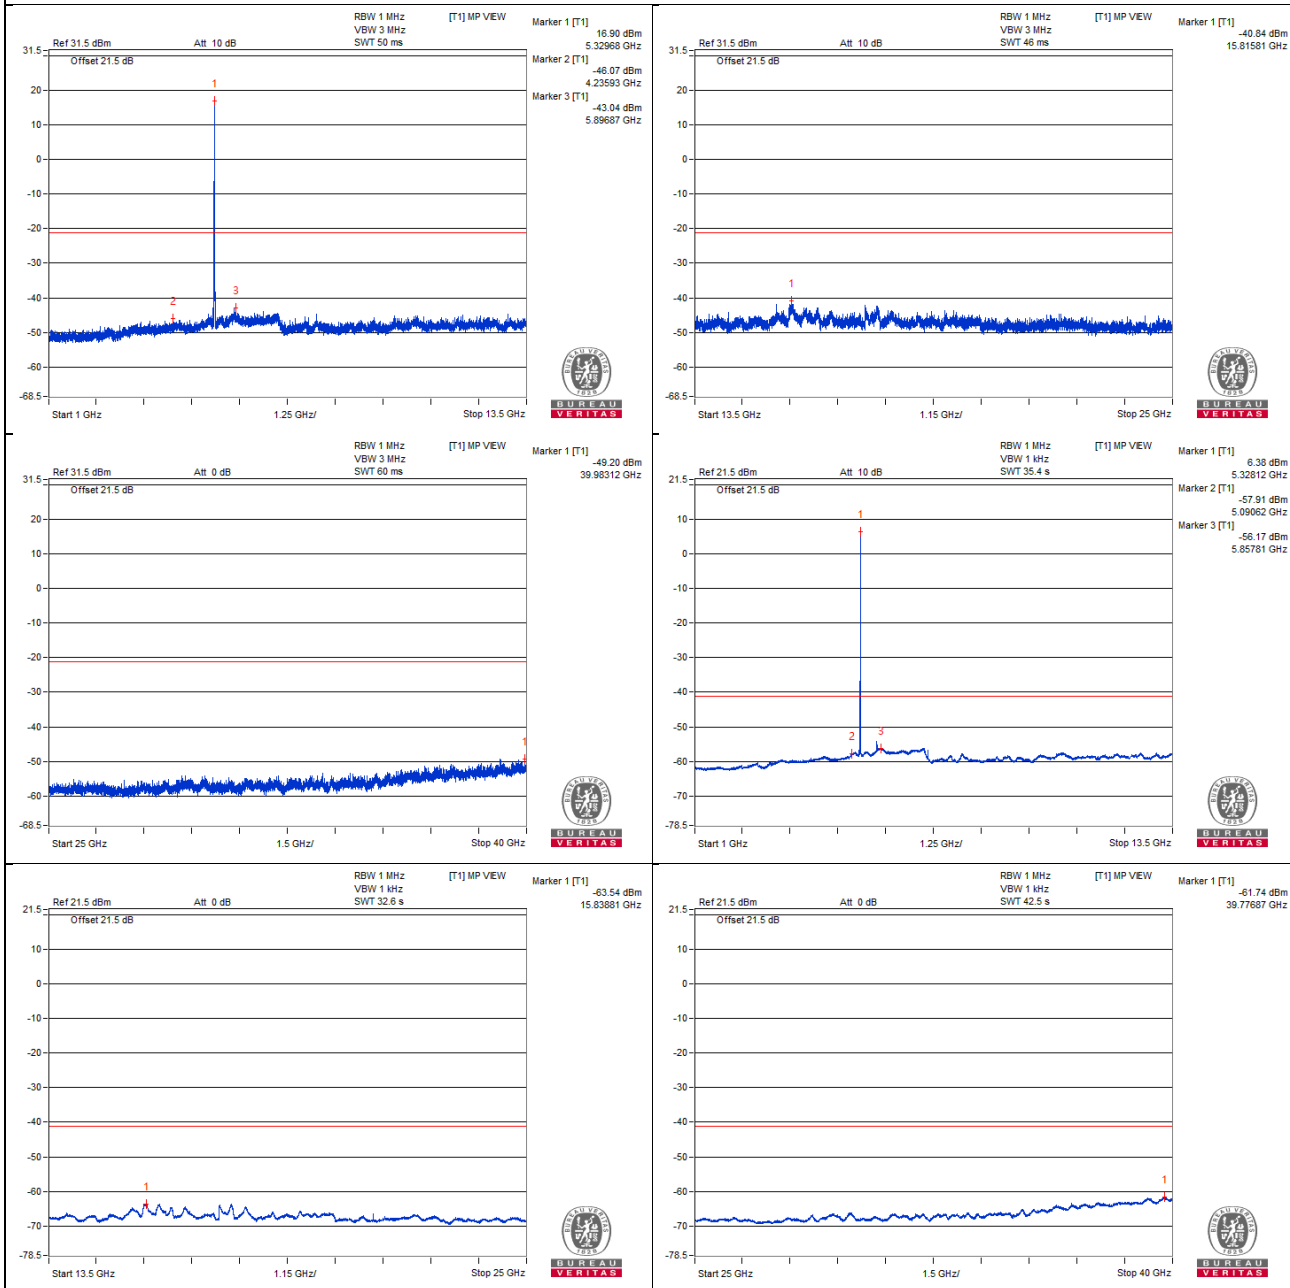

Chain 1

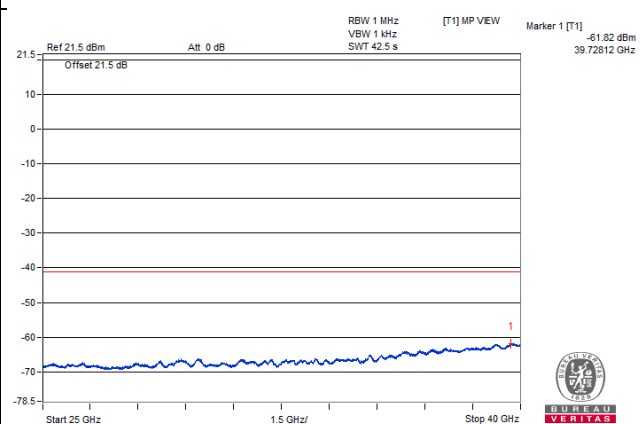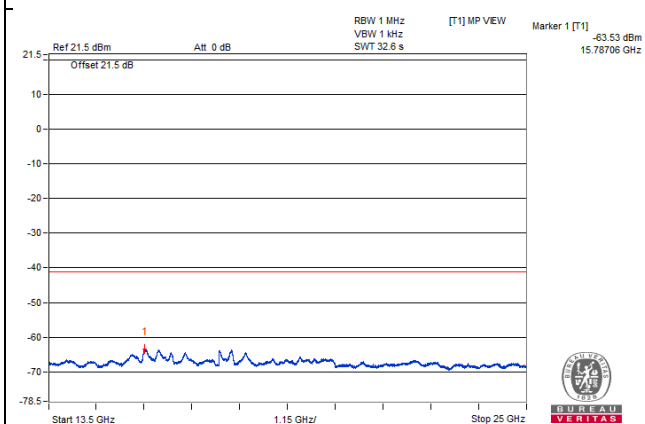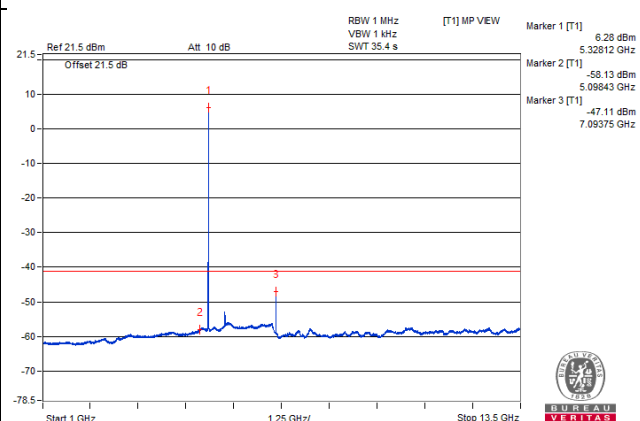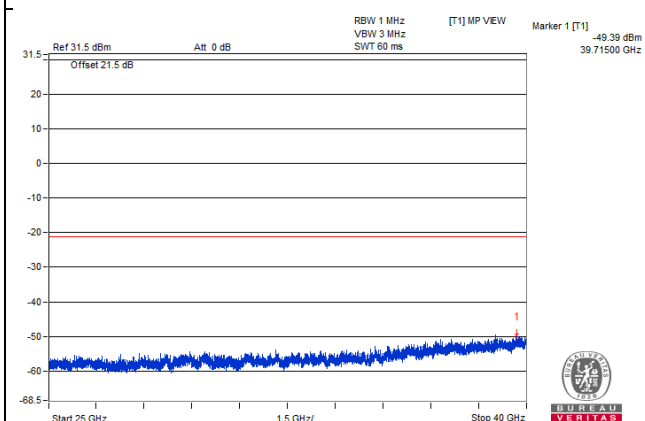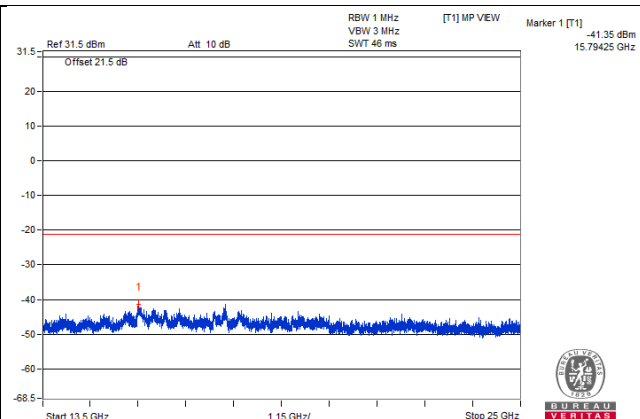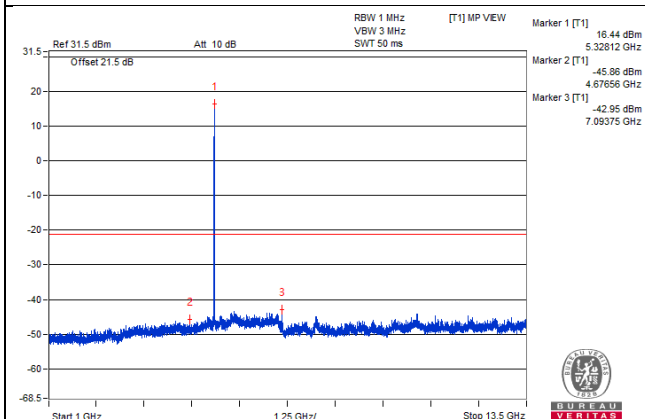

Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5350.02 PK	75.42	74	* 1.42	-28.24	-29.77	6.09	-19.84
2	5448.45 AV	47.39	54	-6.61	-56.91	-57.04	6.09	-47.87

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.


* The unwanted emission was verified and the test result was passed by radiated measurement.

(Please refer APPENDIX B)

Chain 0

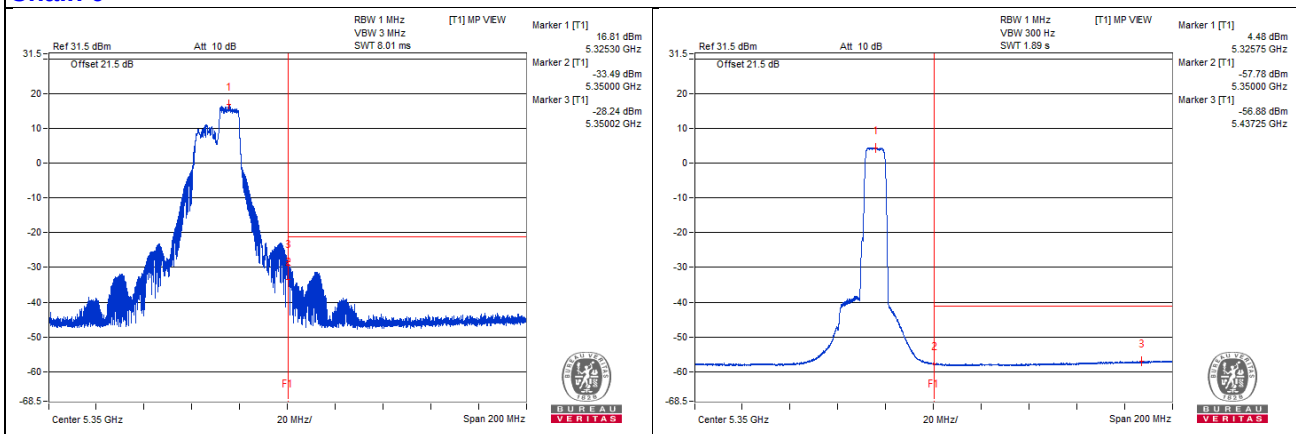

Chain 1

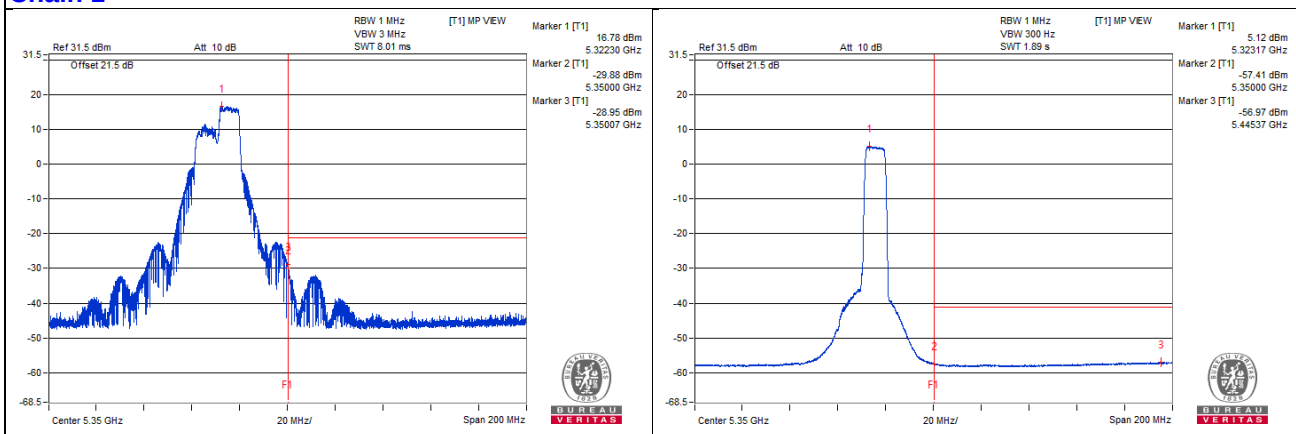

Channel 100

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3667.18 PK	57.05	74	-16.95	-49.54	-48.5	7.77	-38.21
2	3665.62 AV	46.24	54	-7.76	-59.93	-59.68	7.77	-49.02
3	7332.81 PK	58.43	74	-15.57	-48.26	-47.05	7.77	-36.83
4	7332.81 AV	51.04	54	-2.96	-54.89	-55.11	7.77	-44.22
5	11001.56 PK	59.3	74	-14.7	-46.64	-46.84	7.77	-35.96
6	11003.12 AV	47.55	54	-6.45	-58.62	-58.37	7.77	-47.71
7	16482.81 PK	60.38	68.2	-7.82	-44.66	-46.96	7.77	-34.88

Note :







Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

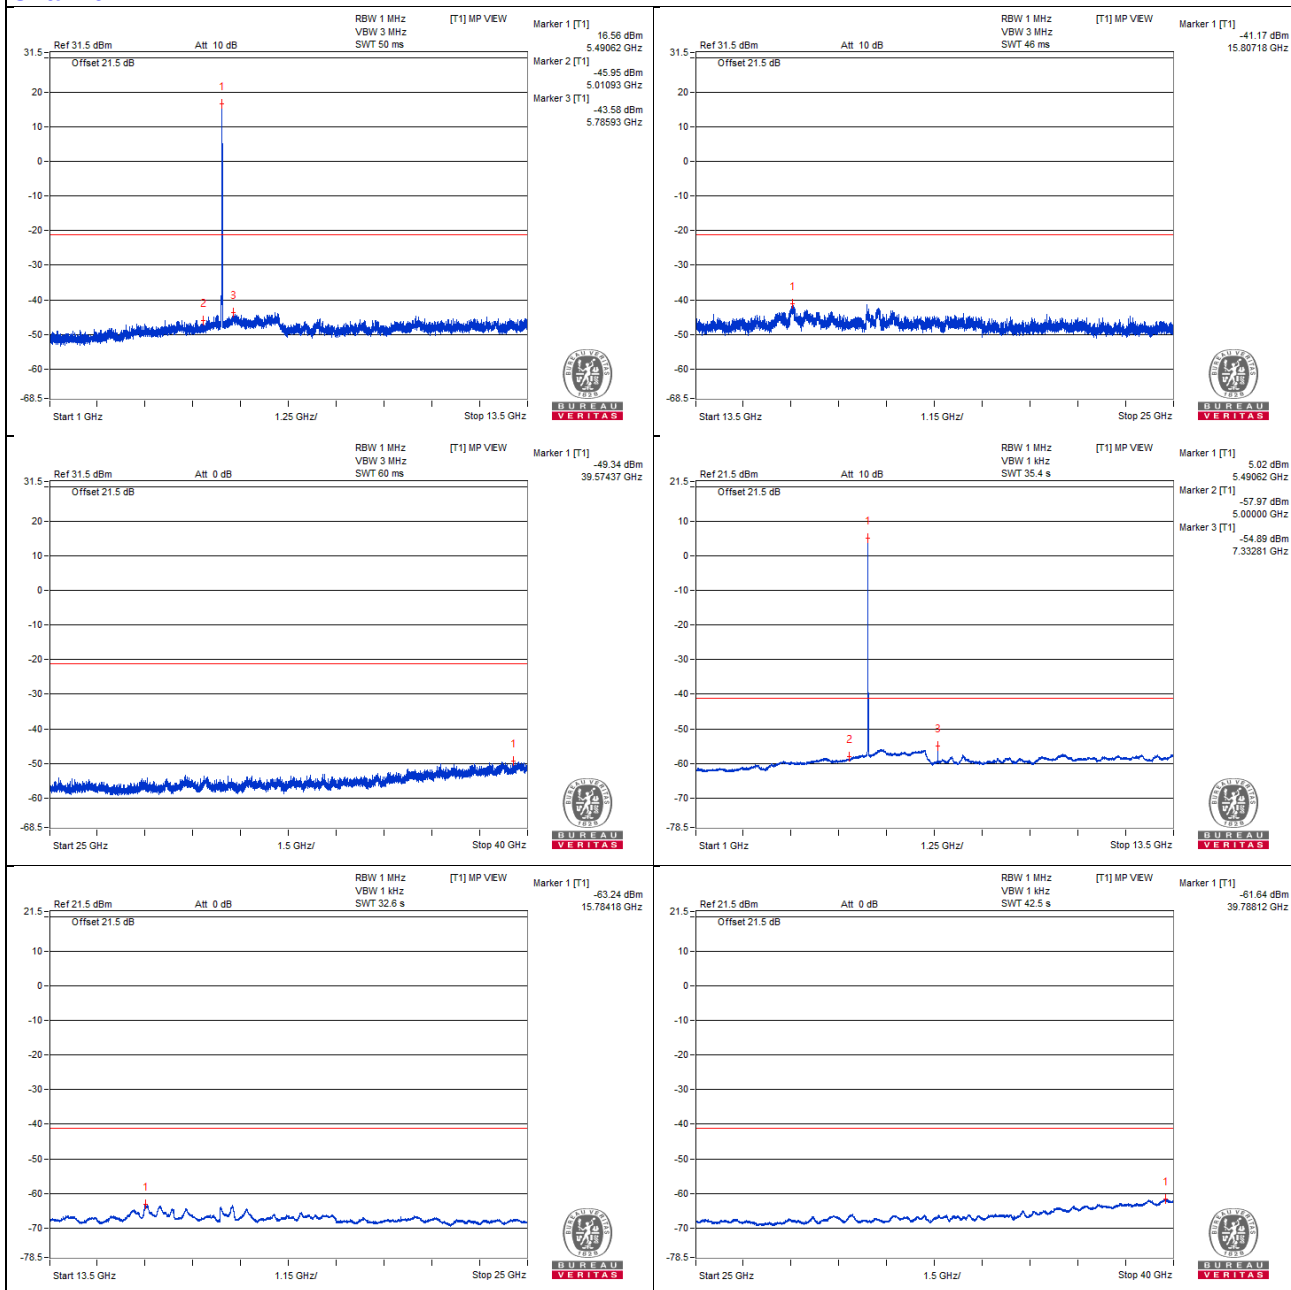

Chain 1

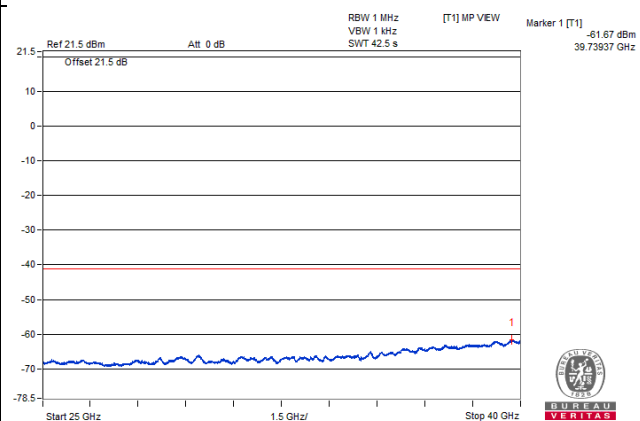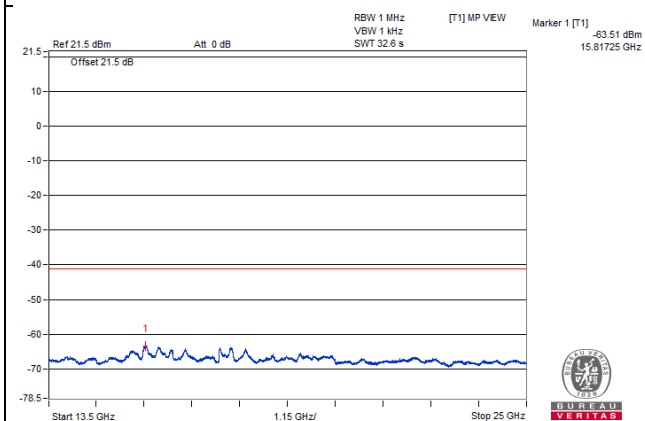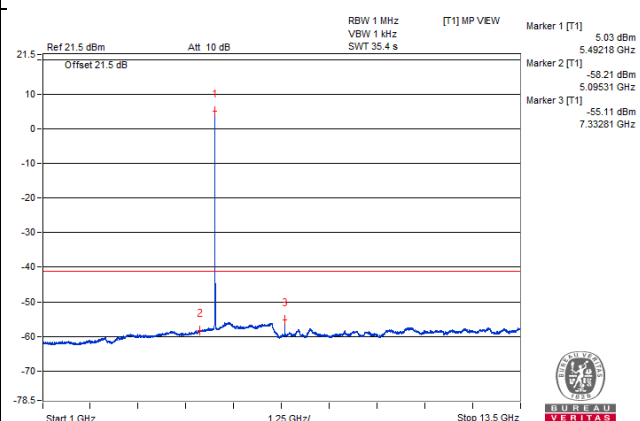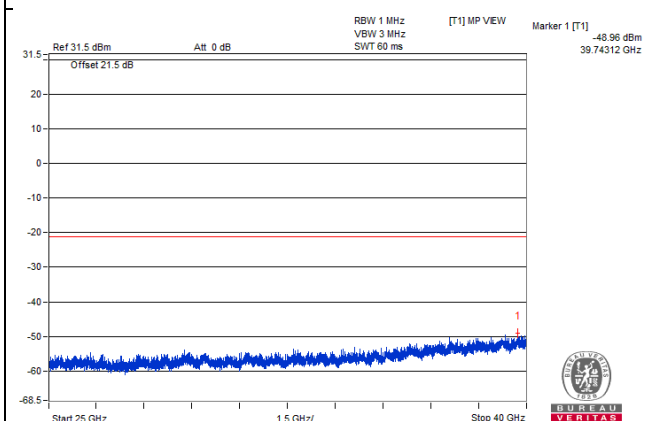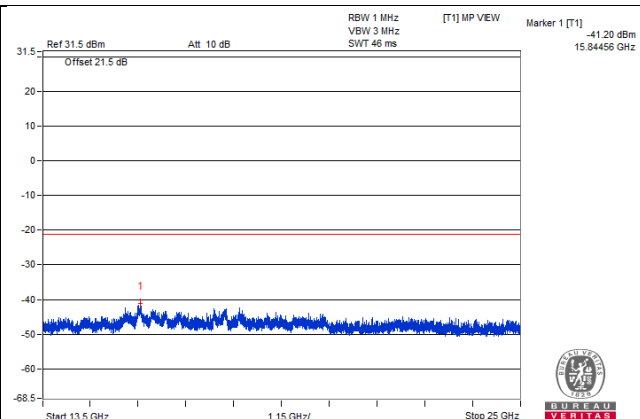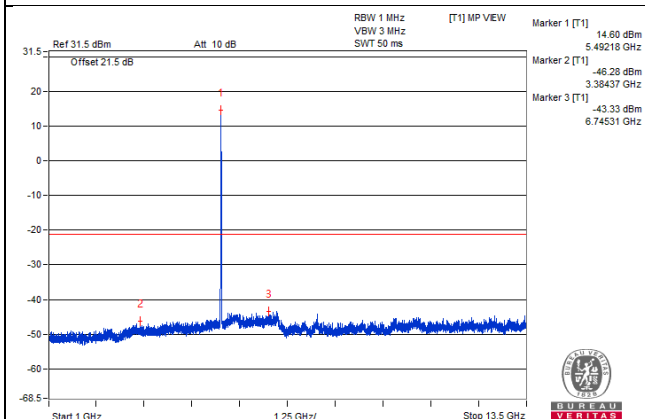

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5453.09 PK	63.51	74	-10.49	-41.74	-43.5	7.77	-31.75
2	5449.68 AV	48.44	54	-5.56	-57.58	-57.62	7.77	-46.82
3	5468.9 PK	72.64	74	*-1.36	-32.54	-34.48	7.77	-22.62
4	5466.81 AV	48.45	54	-5.55	-57.4	-57.78	7.77	-46.81

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8
d = measurement distance in 3 meters.

* The unwanted emission was verified and the test result was passed by radiated measurement.
(Please refer APPENDIX B)

Chain 0

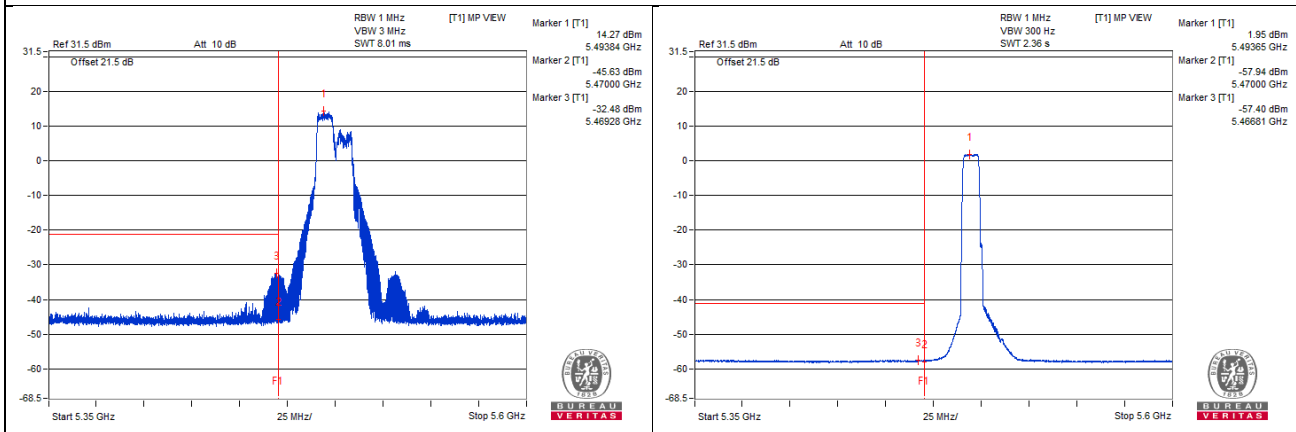

Chain 1

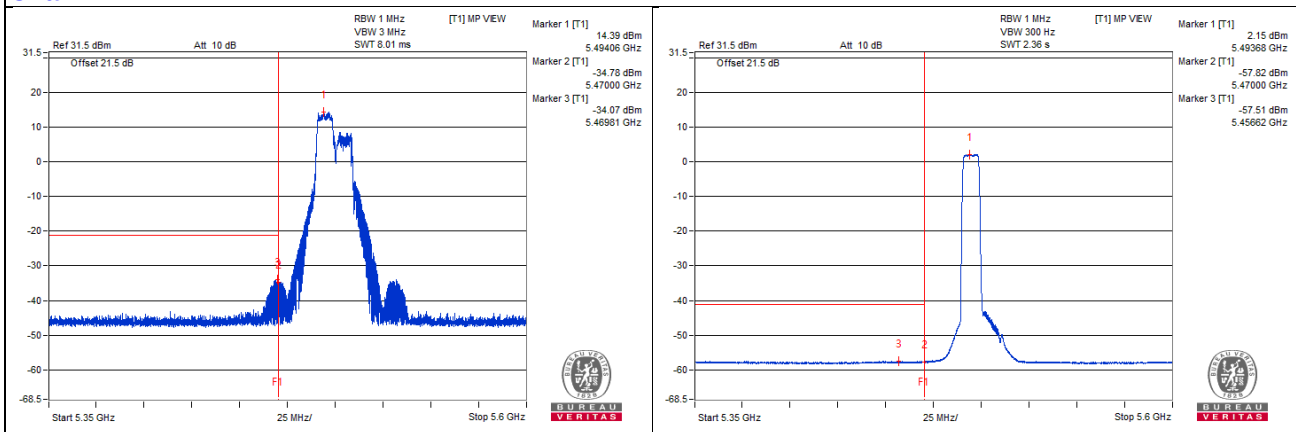

Channel 116

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3748.43 PK	57.82	74	-16.18	-47.67	-48.85	7.77	-37.44
2	3754.68 AV	46.23	54	-7.77	-59.87	-59.76	7.77	-49.03
3	7414.06 PK	59.14	74	-14.86	-45.86	-48.27	7.77	-36.12
4	7440.62 AV	48.65	54	-5.35	-57.68	-57.12	7.77	-46.61
5	11137.5 PK	59.05	74	-14.95	-48.03	-46.15	7.77	-36.21
6	11106.25 AV	47.48	54	-6.52	-58.72	-58.4	7.77	-47.78
7	16766 PK	62.58	68.2	-5.62	-43.61	-43.31	7.77	-32.68

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

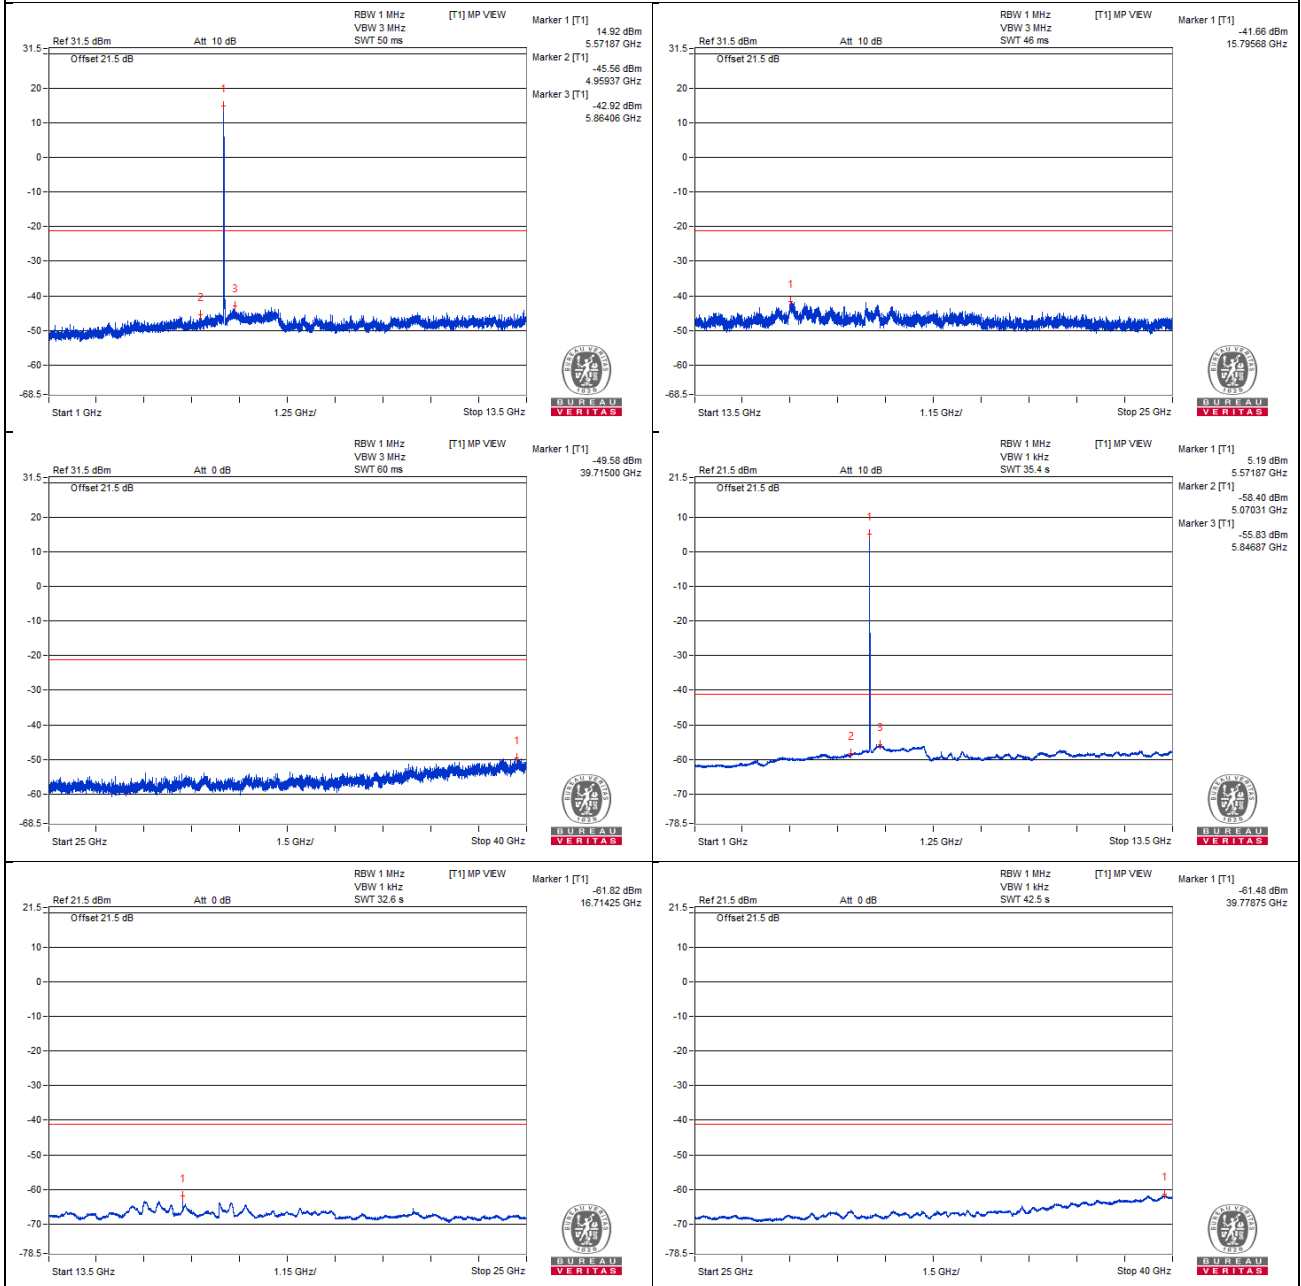

Chain 1

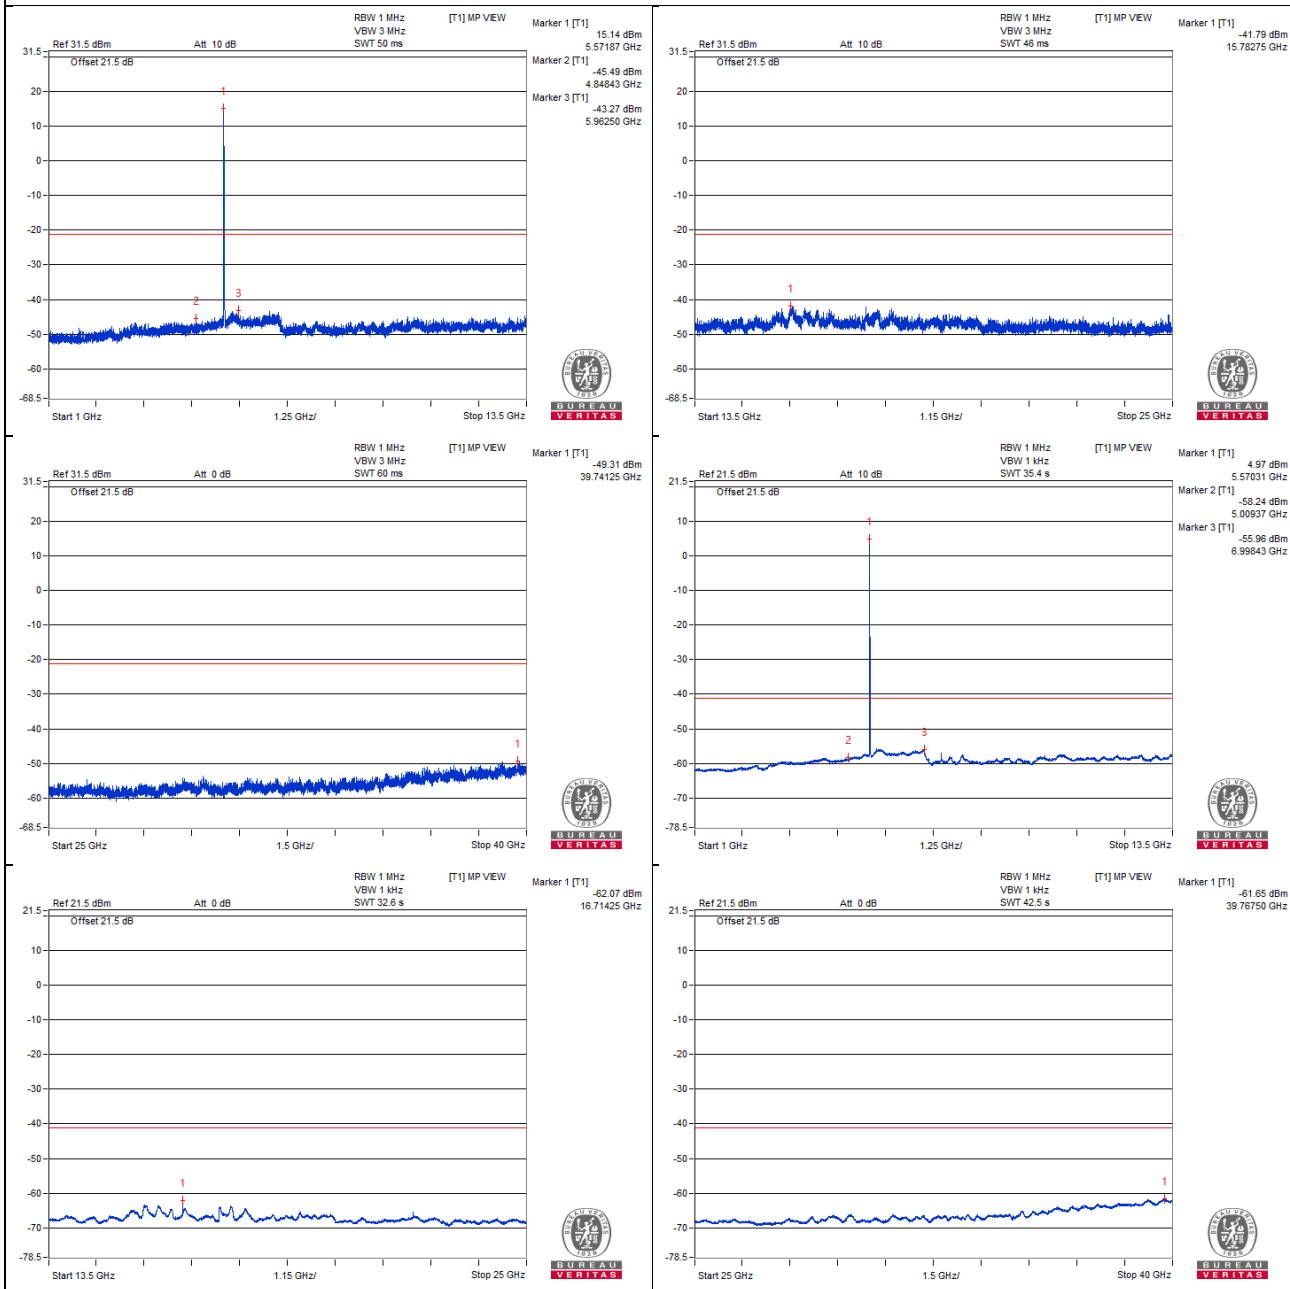

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5427.87 PK	62.61	74	-11.39	-41.79	-46.11	7.77	-32.65
2	5429.25 AV	49.13	54	-4.87	-56.84	-56.99	7.77	-46.13
3	5464.28 PK	62.09	74	-11.91	-44.1	-43.81	7.77	-33.17
4	5461.65 AV	48.97	54	-5.03	-57.15	-57	7.77	-46.29

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

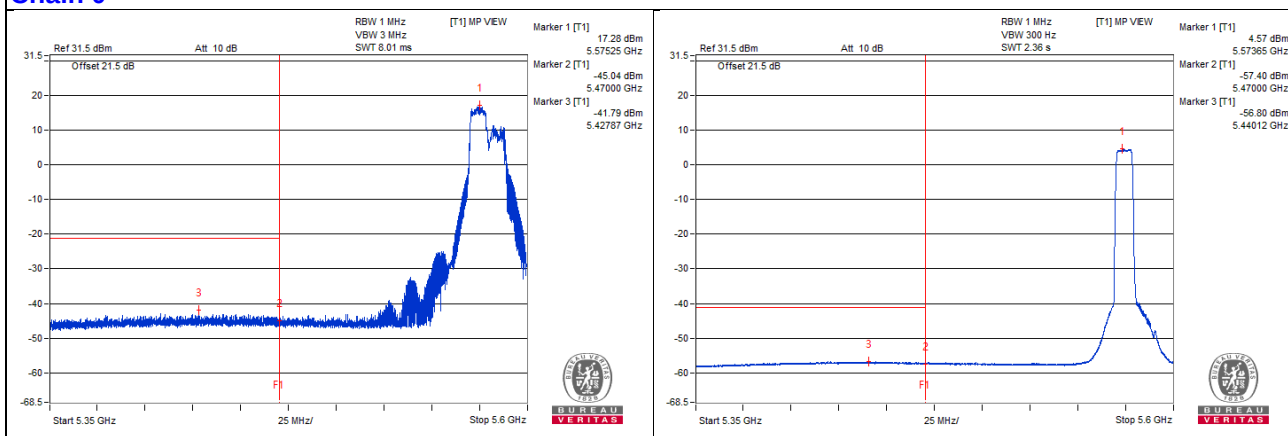

Chain 1

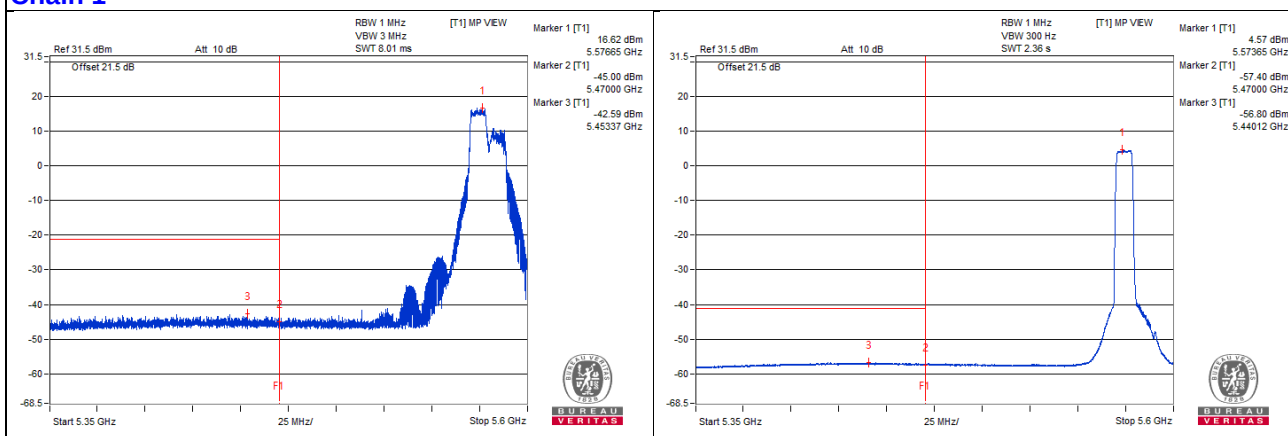

Channel 140

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3800 PK	56.28	74	-17.72	-50.07	-49.47	7.77	-38.98
2	3800 AV	45.77	54	-8.23	-60.27	-60.28	7.77	-49.49
3	7600 PK	57.03	74	-16.97	-48.29	-49.87	7.77	-38.23
4	7600 AV	47.82	54	-6.18	-58.05	-58.39	7.77	-47.44
5	11407.81 PK	59.6	74	-14.4	-46.79	-46.12	7.77	-35.66
6	11414.06 AV	47.64	54	-6.36	-58.6	-58.2	7.77	-47.62
7	17090.87 PK	60.47	68.2	-7.73	-47.28	-44.35	7.77	-34.79

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

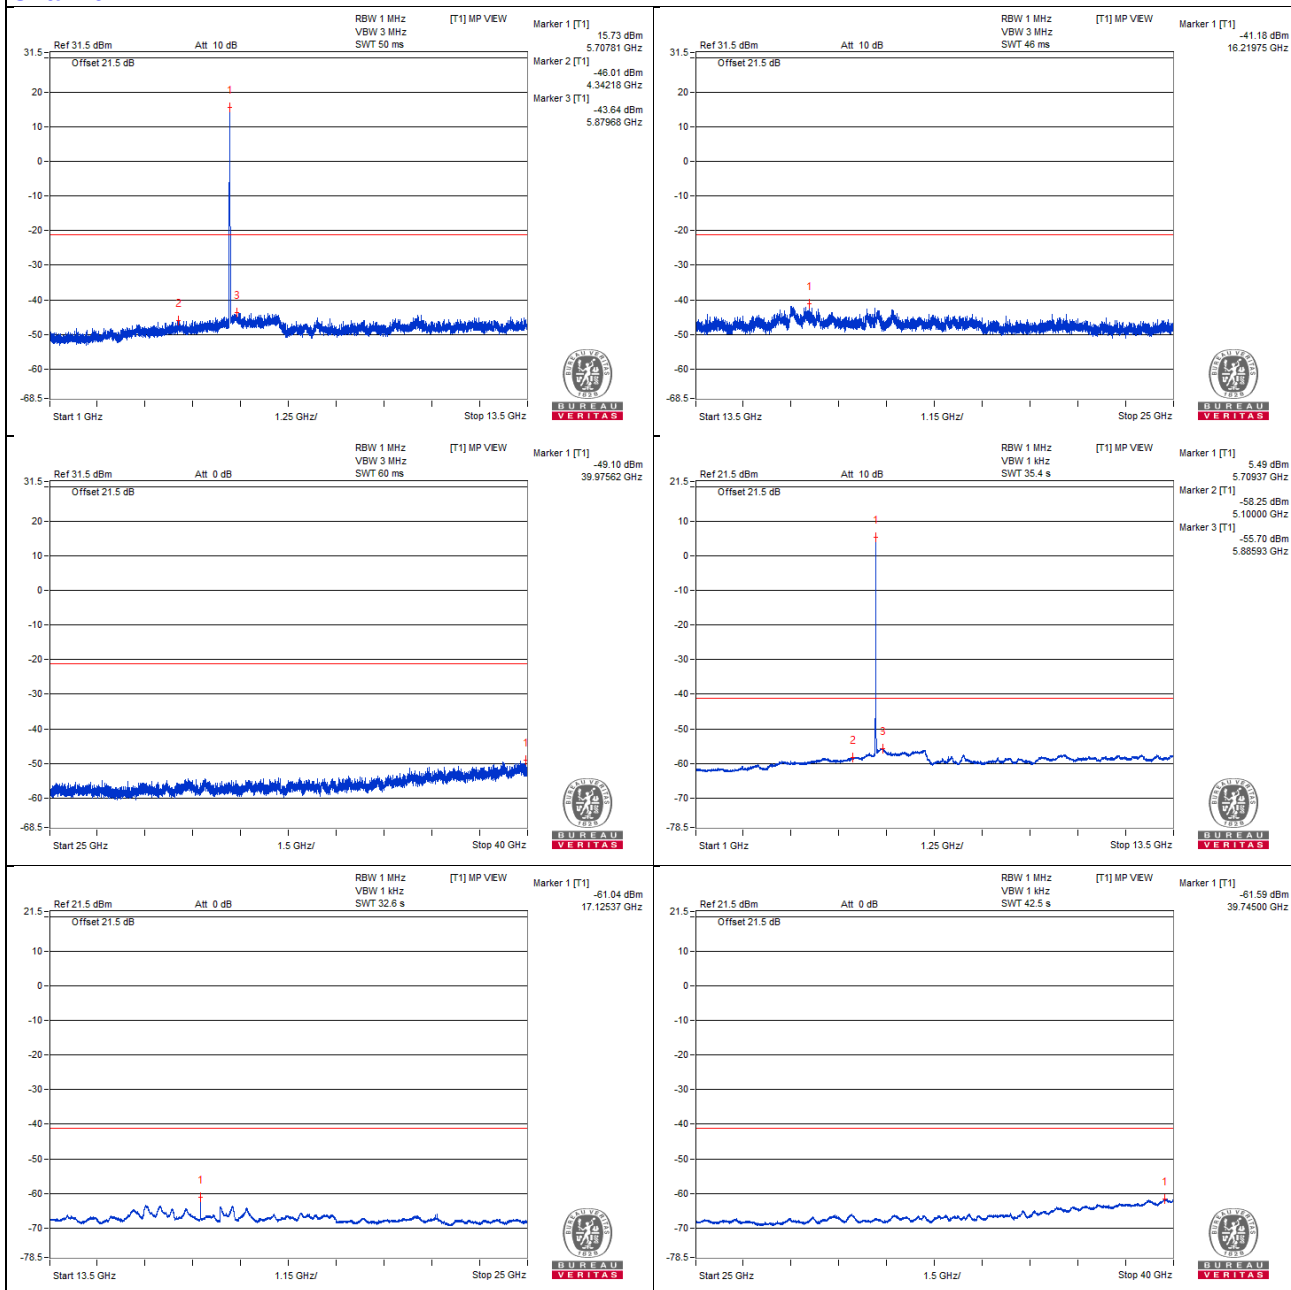

Chain 1

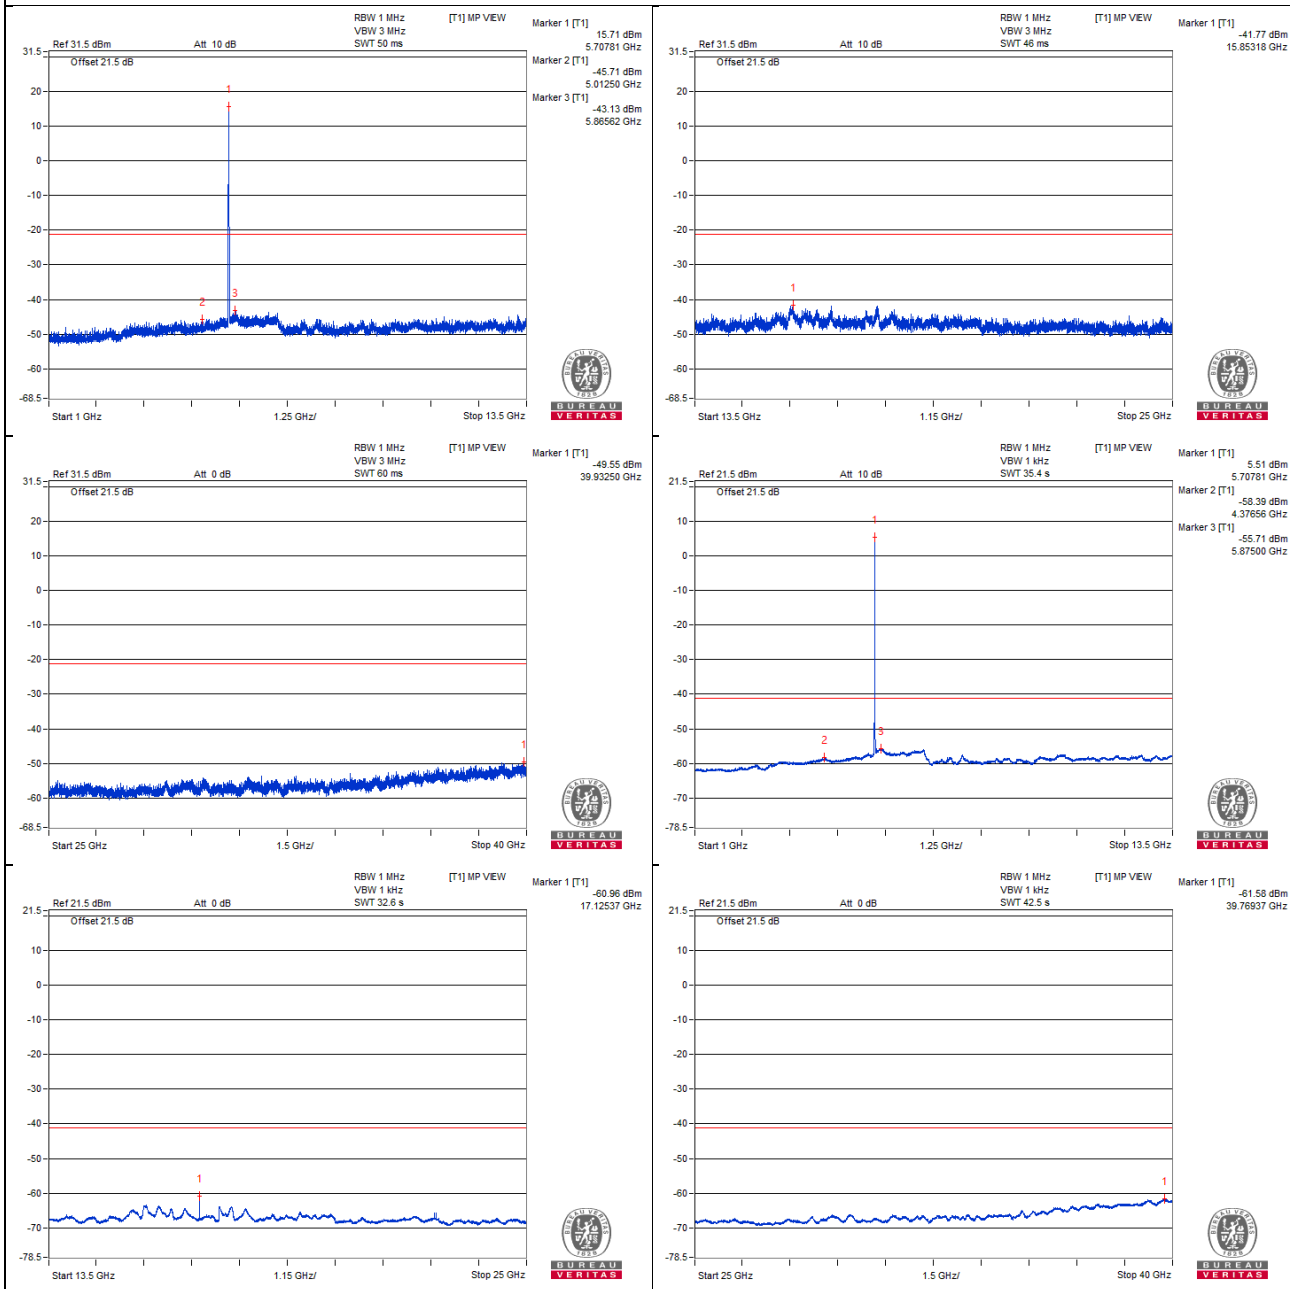

Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5728.95 PK	76.87	74	* 2.87	-28.16	-30.5	7.77	-18.39
2	5760 AV	52.51	54	-1.49	-54.89	-52.5	7.77	-42.75

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.


* The unwanted emission was verified and the test result was passed by radiated measurement.

(Please refer APPENDIX B)

Chain 0

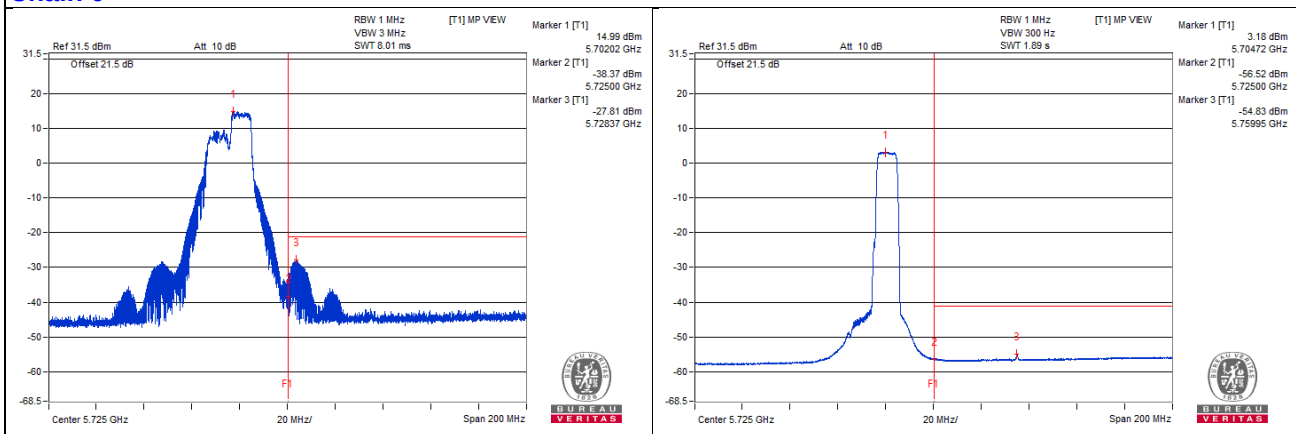

Chain 1

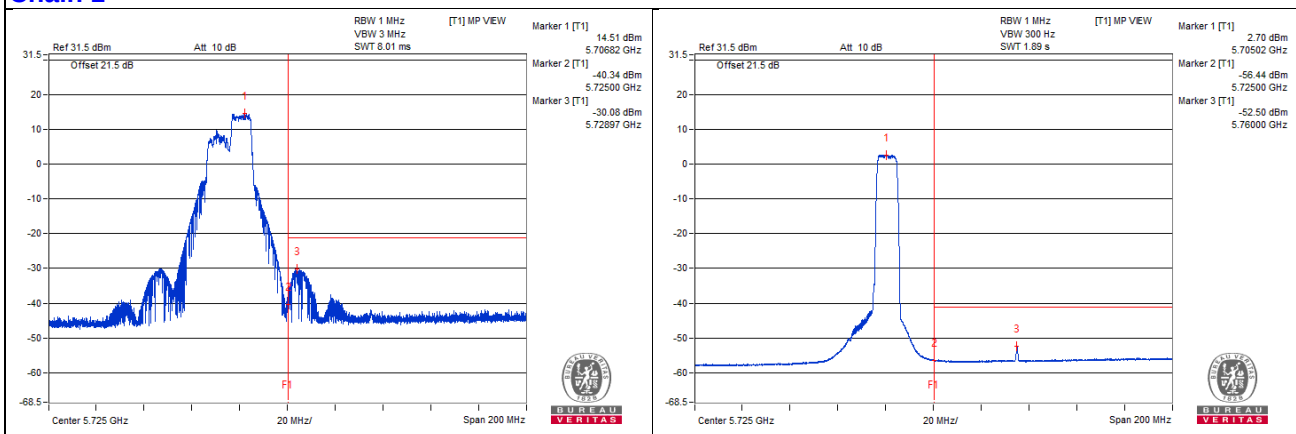

Channel 144

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3787.5 PK	57.59	74	-16.41	-48.35	-48.55	7.77	-37.67
2	3776.56 AV	46.31	54	-7.69	-59.84	-59.62	7.77	-48.95
3	7679.68 PK	59.18	74	-14.82	-45.64	-48.57	7.77	-36.08
4	7626.56 AV	49.3	54	-4.7	-58.57	-55.46	7.77	-45.96
5	11396.87 PK	59.3	74	-14.7	-48.37	-45.56	7.77	-35.96
6	11451.56 AV	47.77	54	-6.23	-58.32	-58.23	7.77	-47.49
7	17134 PK	60.94	68.2	-7.26	-44.44	-45.87	7.77	-34.32

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

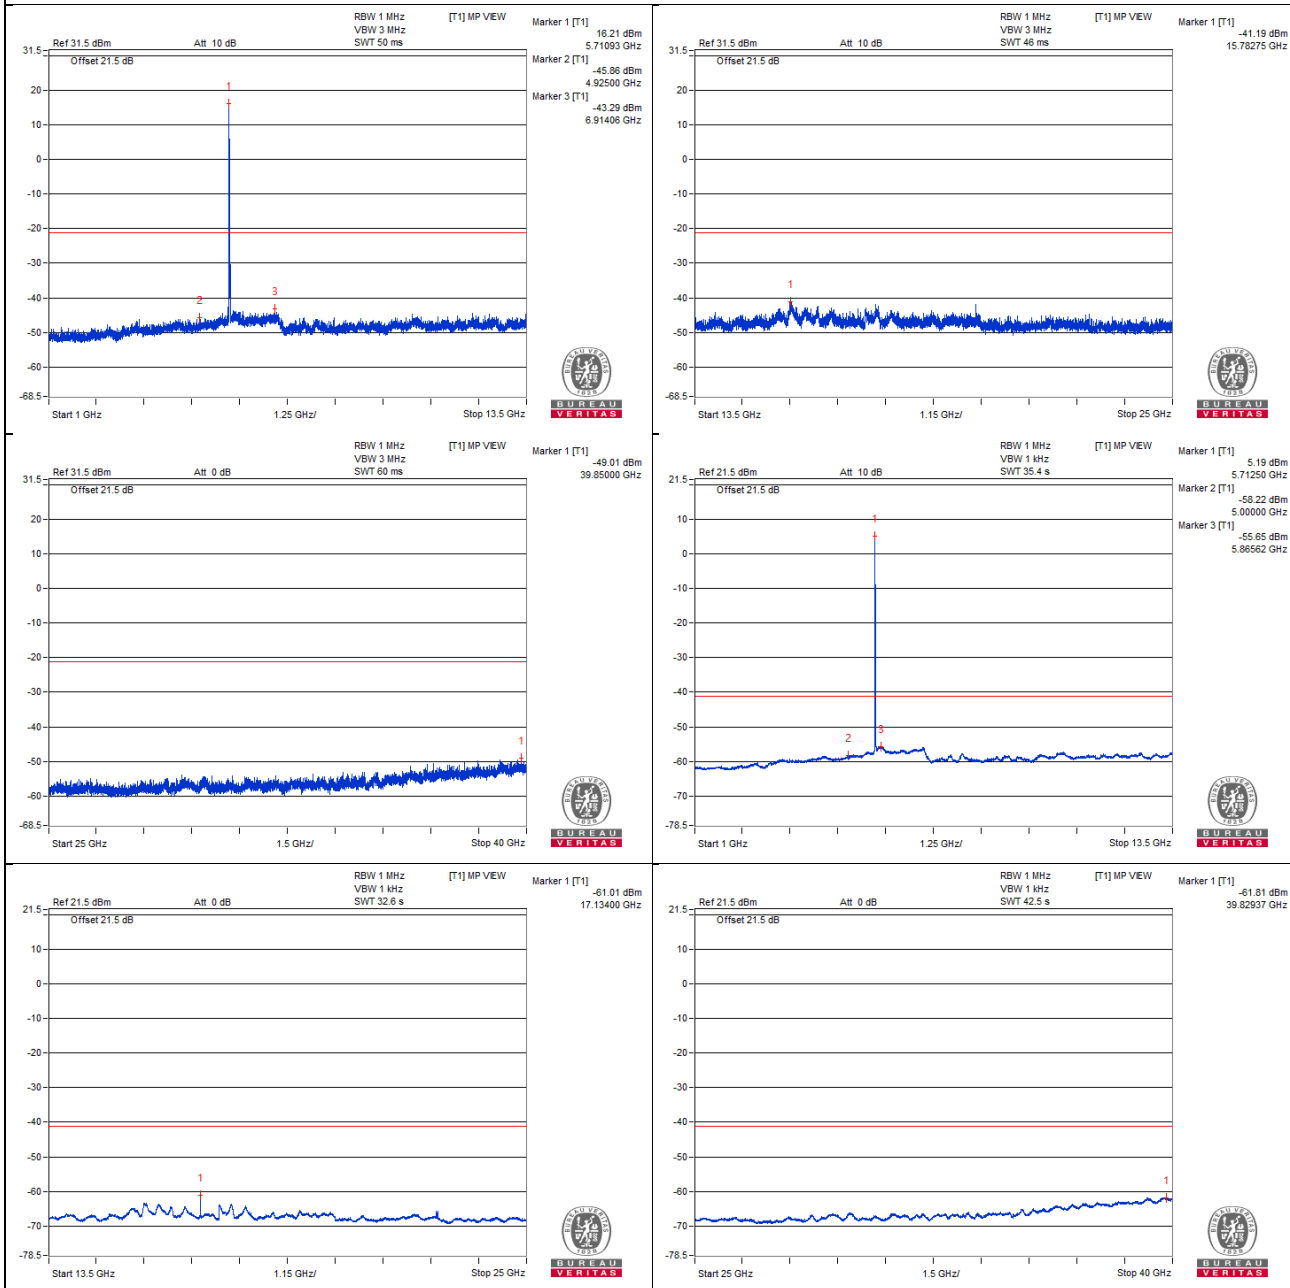

Chain 1

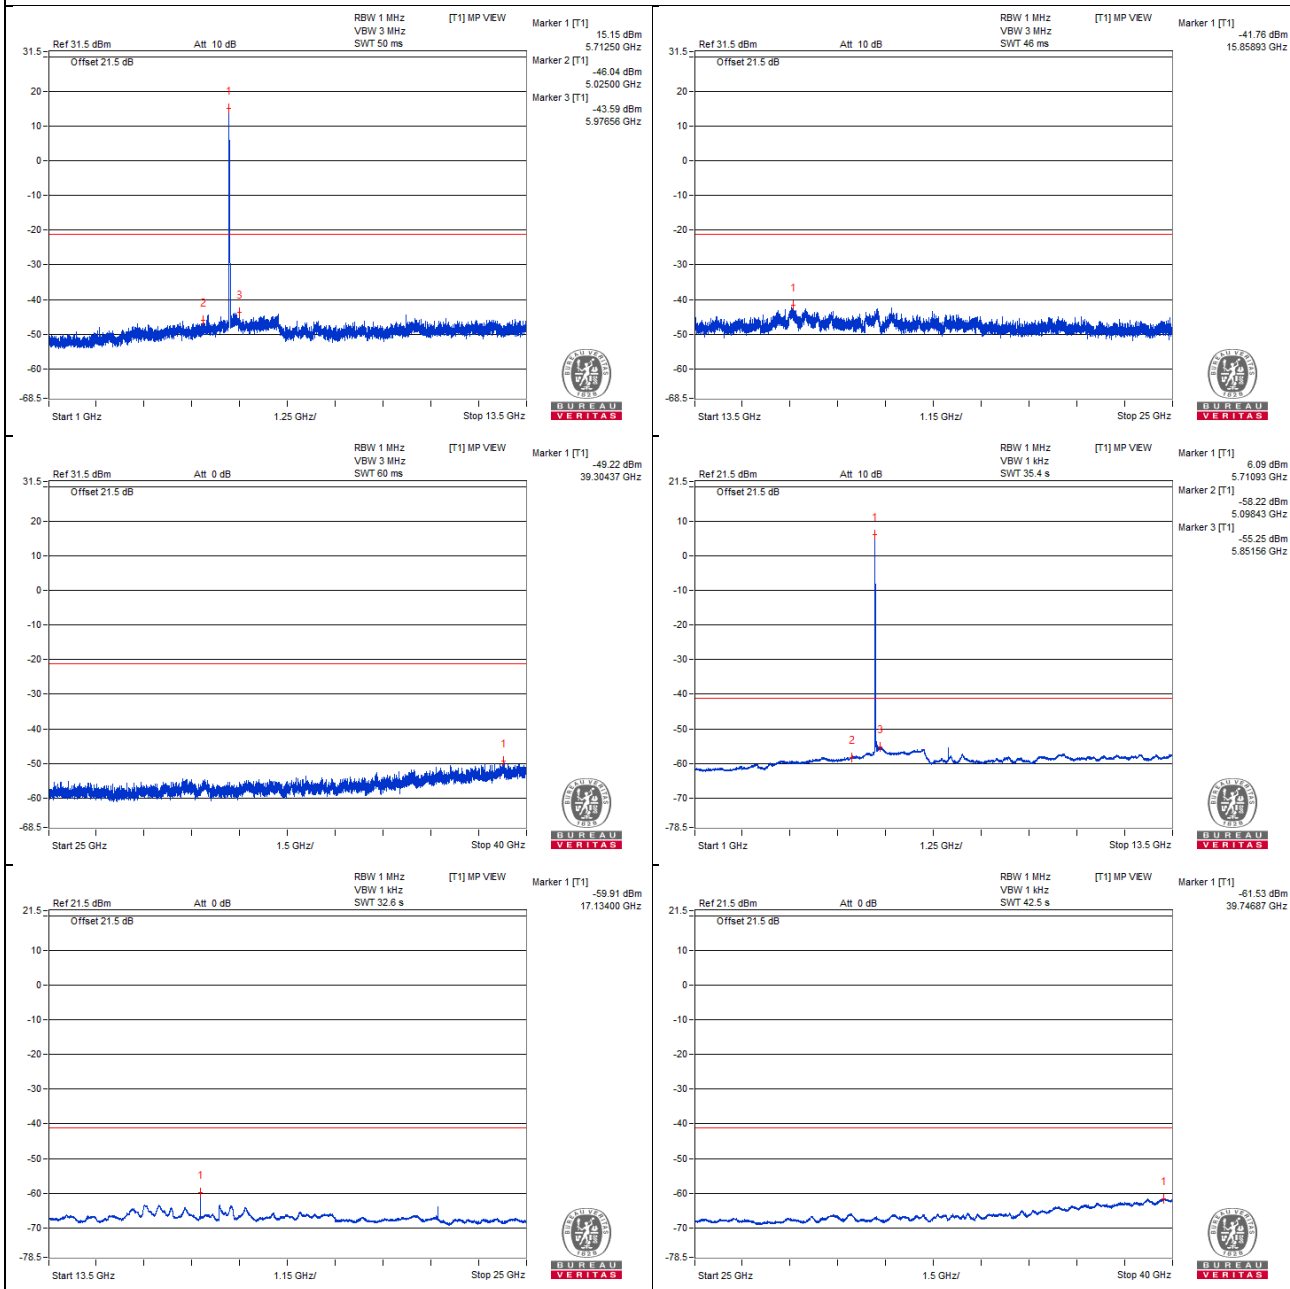

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5871.85 PK	63.67	74	-10.33	-43.55	-41.45	7.77	-31.59
2	5862.96 AV	50.51	54	-3.49	-55.57	-55.49	7.77	-44.75

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

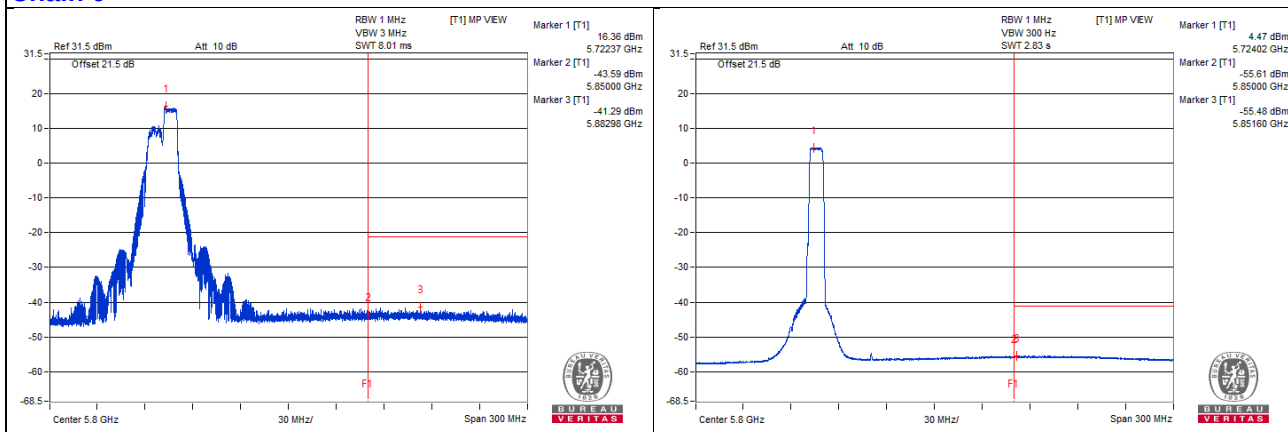

Chain 1

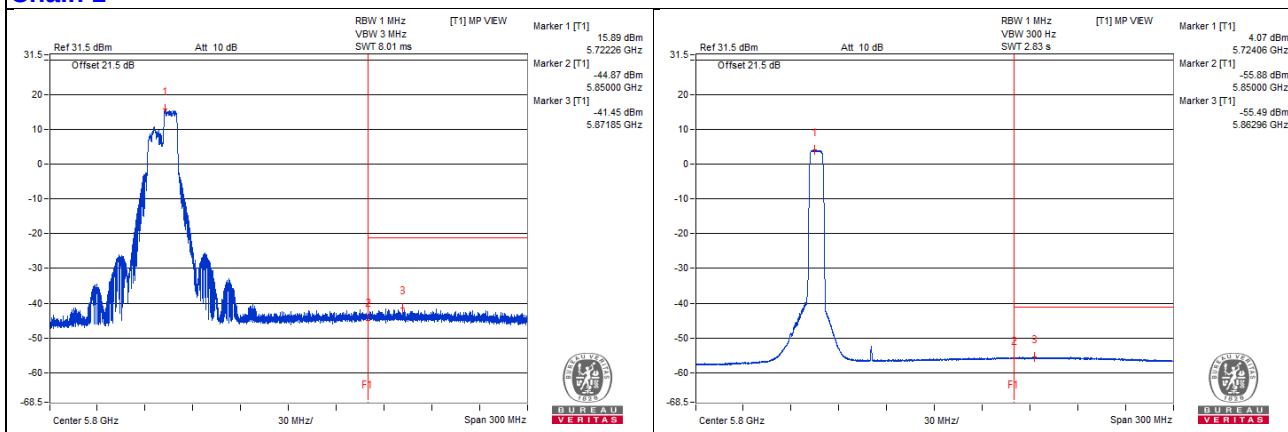

Channel 149

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3831.25 PK	57.17	74	-16.83	-49.03	-48.72	7.77	-38.09
2	3831.25 AV	46.22	54	-7.78	-59.87	-59.77	7.77	-49.04
3	7660.93 PK	58.49	74	-15.51	-47.39	-47.71	7.77	-36.77
4	7659.37 AV	49.05	54	-4.95	-58.34	-55.96	7.77	-46.21
5	11473.43 PK	59.48	74	-14.52	-45.74	-47.58	7.77	-35.78
6	11473.43 AV	48.58	54	-5.42	-56.8	-58.25	7.77	-46.68
7	17208.75 PK	82.19	68.2	* 13.99	-24.14	-23.58	7.77	-13.07

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.


* The unwanted emission was verified and the test result was passed by radiated measurement.

(Please refer APPENDIX B)

Chain 0

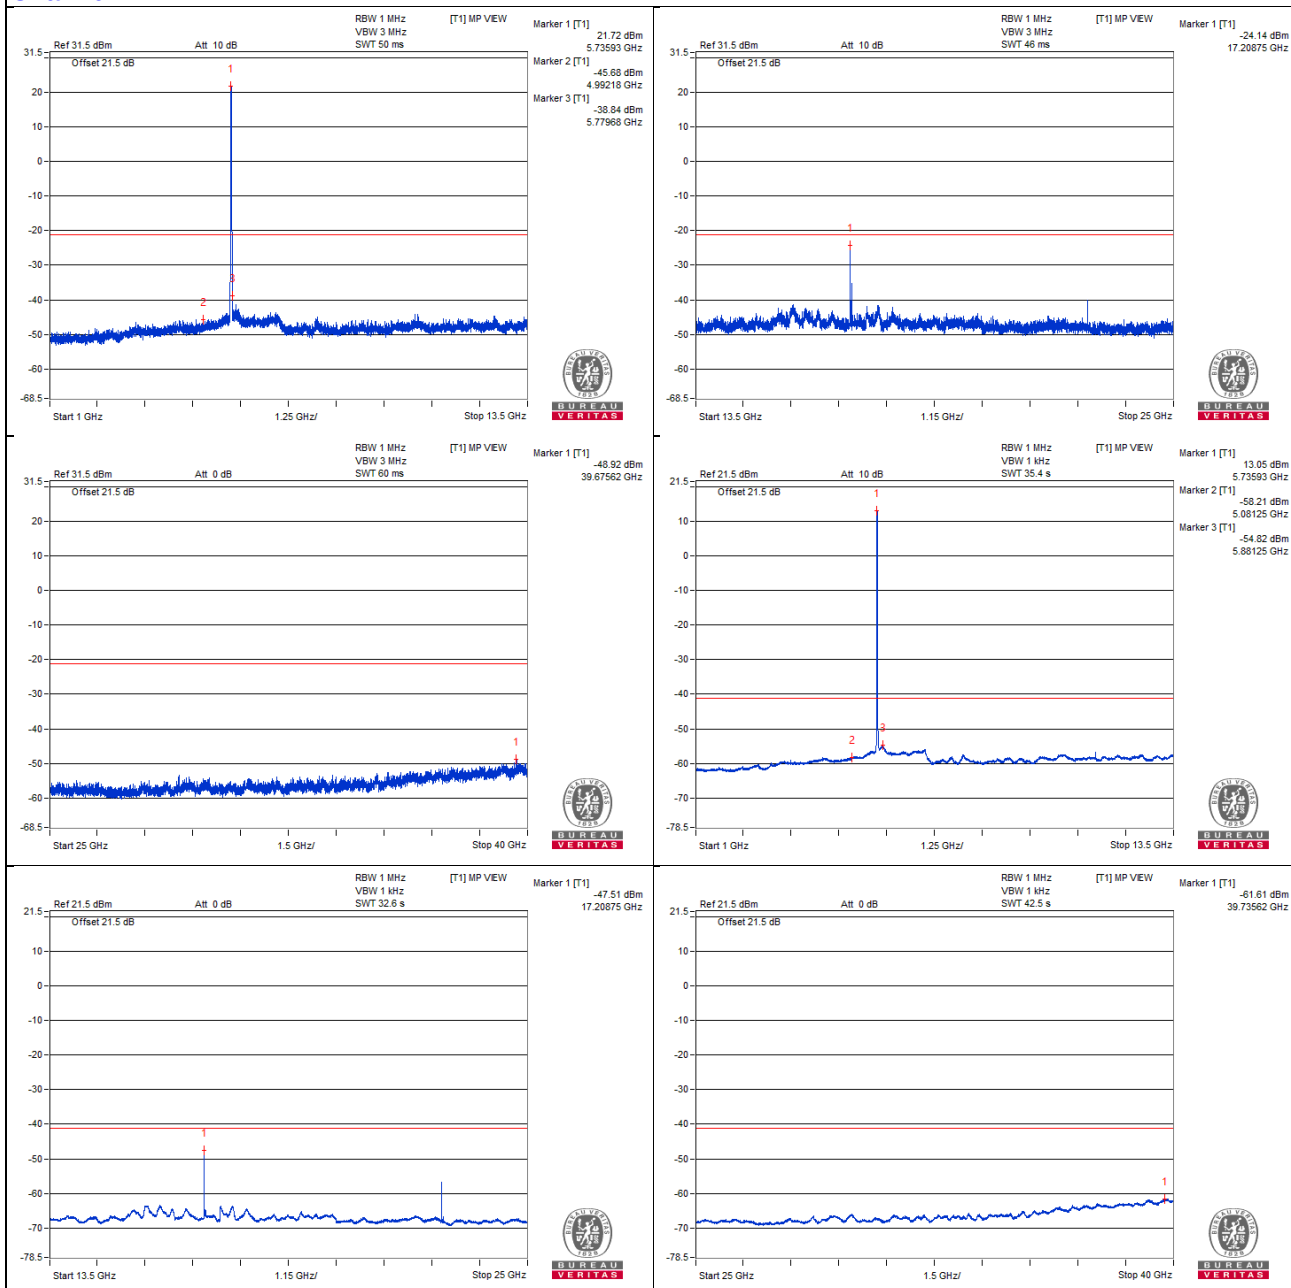


Chain 1

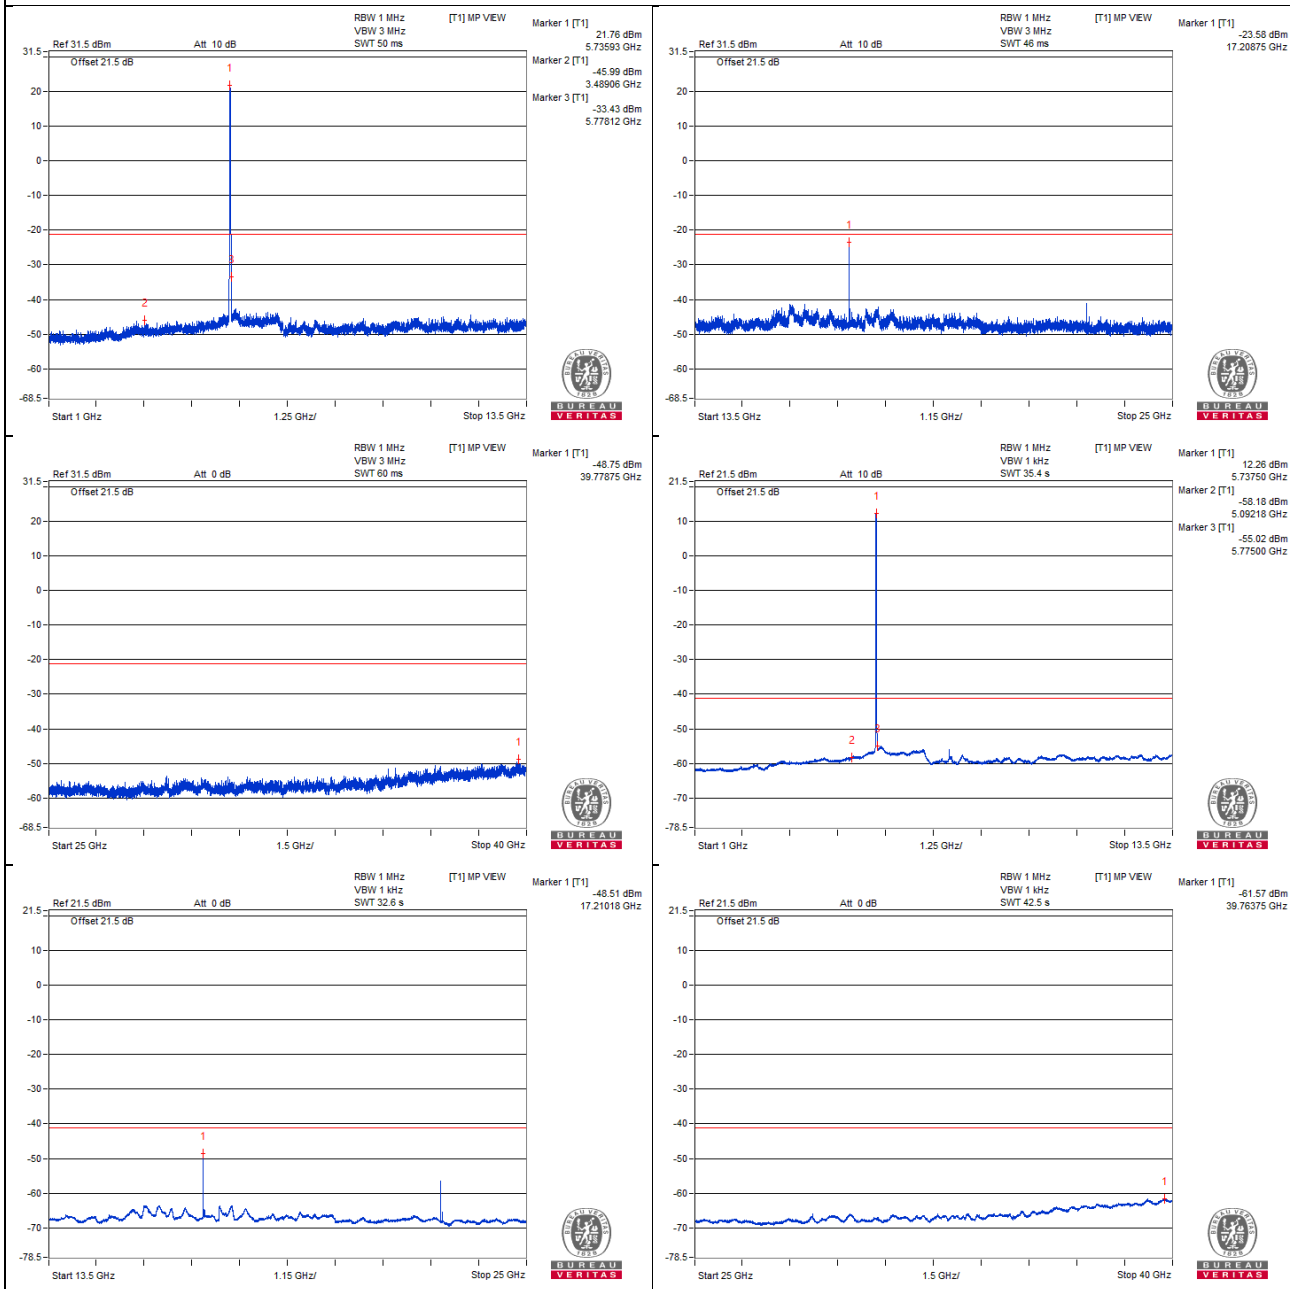


Bandedge table

Chain 0

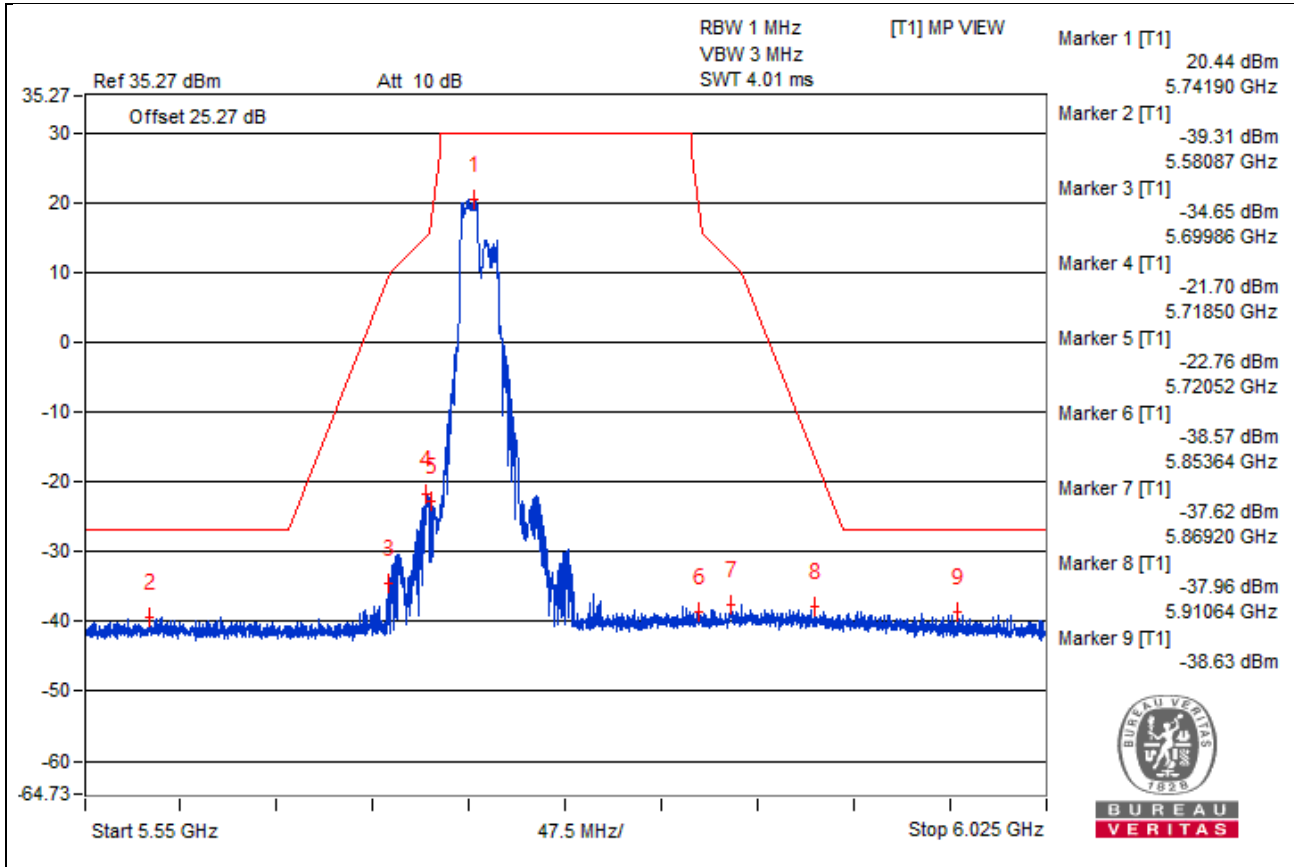

Chain 1

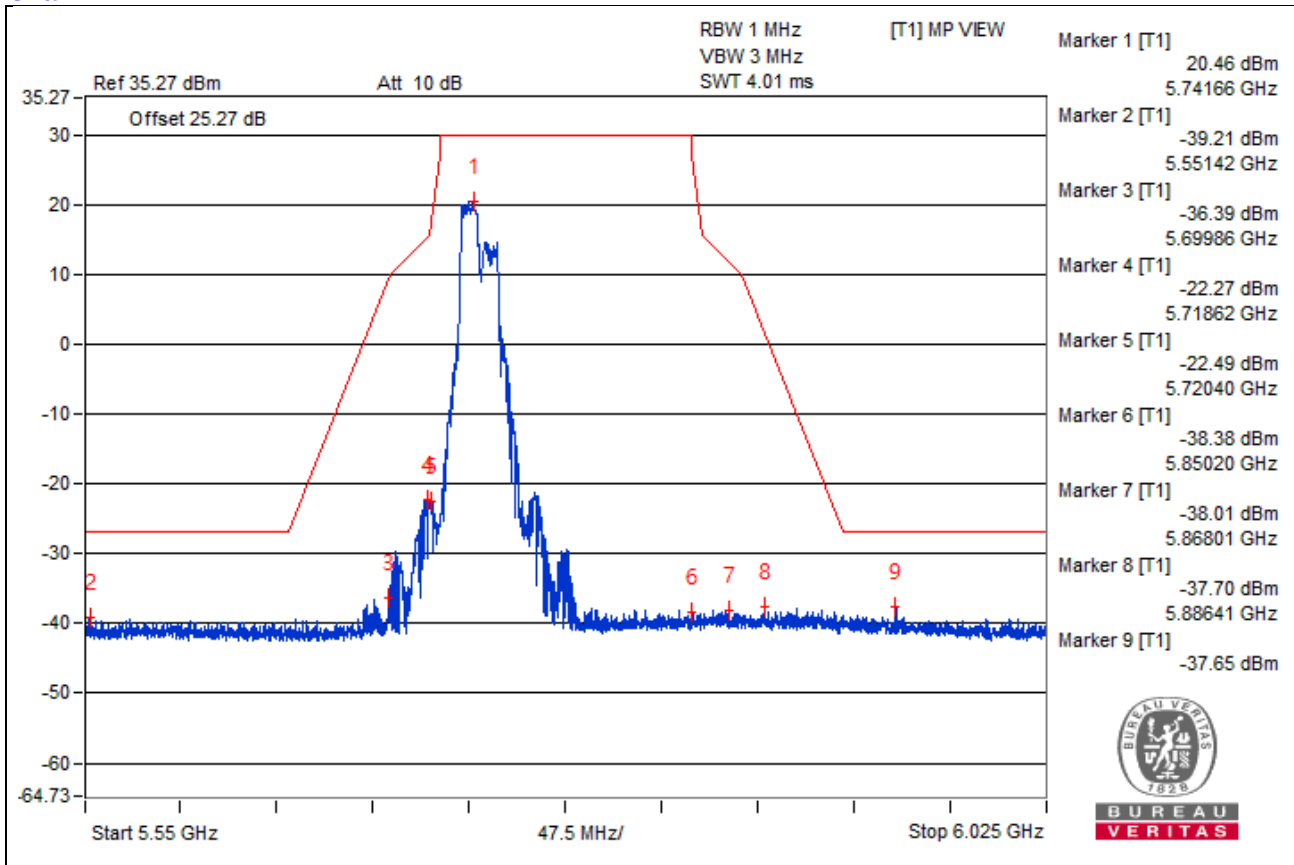

Channel 157

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3857.81 PK	56.62	74	-17.38	-49.75	-49.12	7.77	-38.64
2	3856.25 AV	46.08	54	-7.92	-60	-59.93	7.77	-49.18
3	7712.5 PK	58.23	74	-15.77	-47.87	-47.76	7.77	-37.03
4	7714.06 AV	48.93	54	-5.07	-58.1	-56.3	7.77	-46.33
5	11554.68 PK	59.23	74	-14.77	-45.58	-48.53	7.77	-36.03
6	11553.12 AV	48.59	54	-5.41	-56.65	-58.43	7.77	-46.67
7	17329.5 PK	77.32	68.2	* 9.12	-30.26	-27.59	7.77	-17.94

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.







* The unwanted emission was verified and the test result was passed by radiated measurement.

(Please refer APPENDIX B)

Chain 0

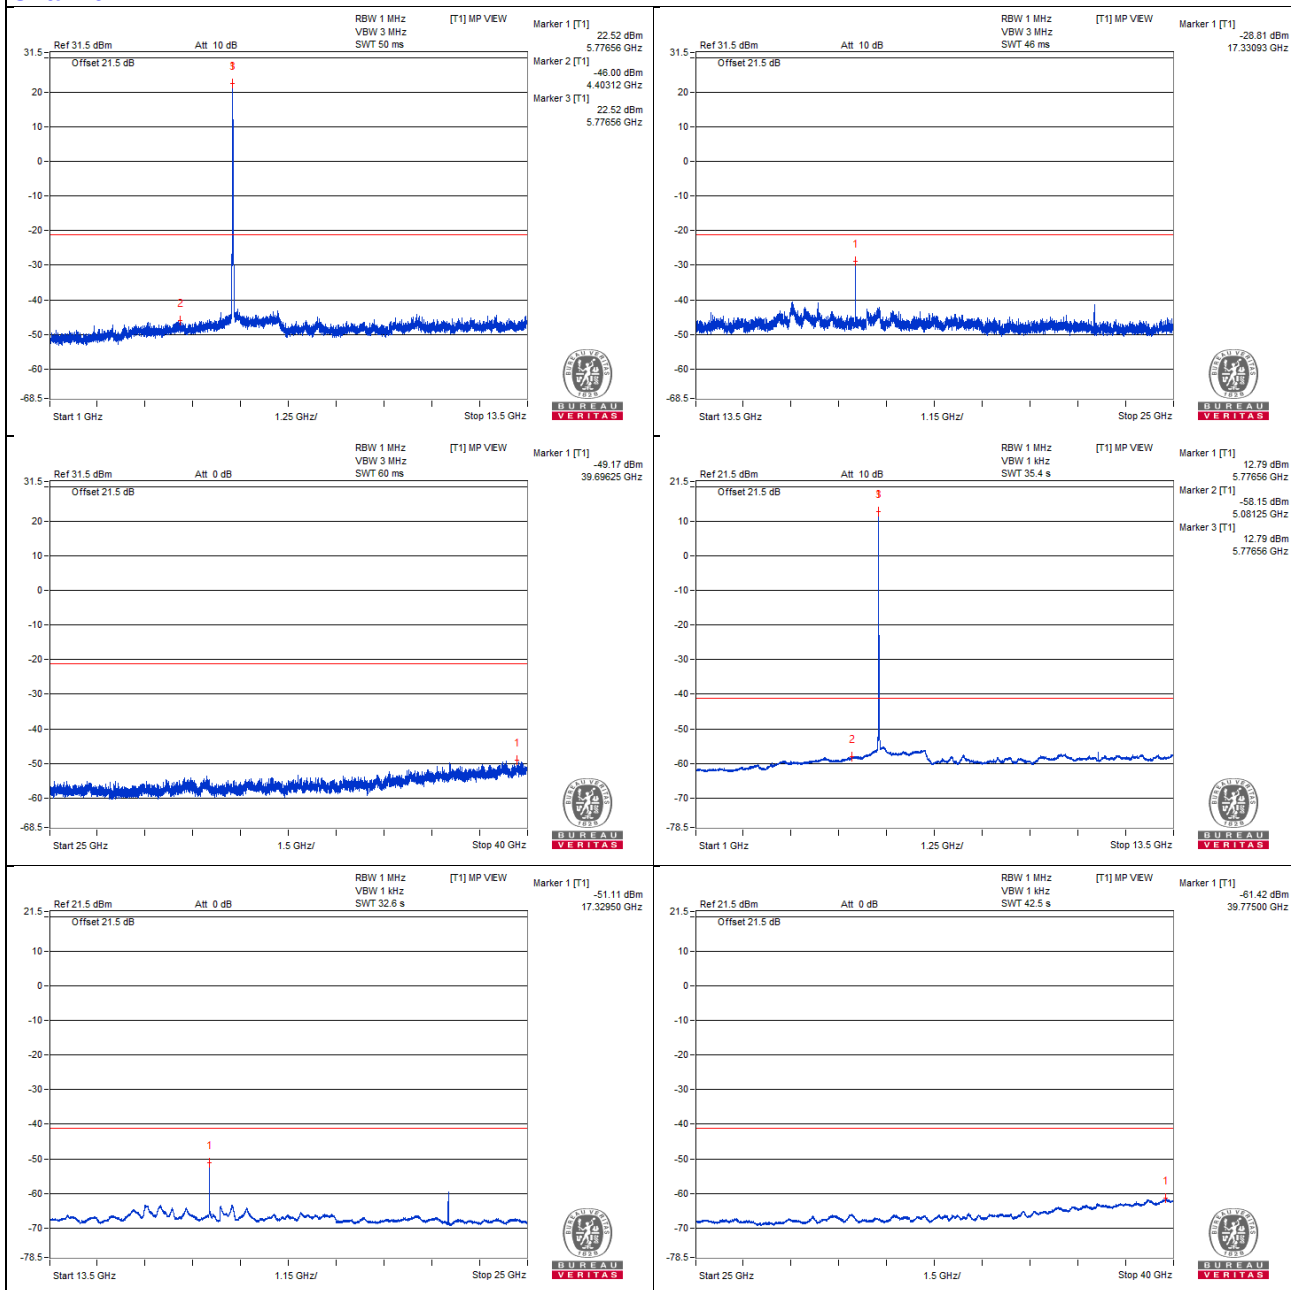


Chain 1

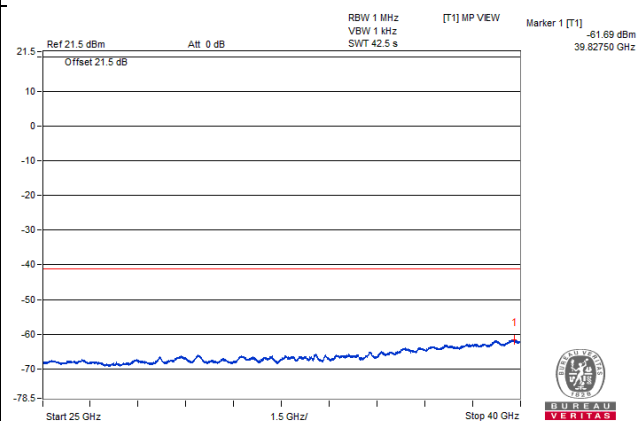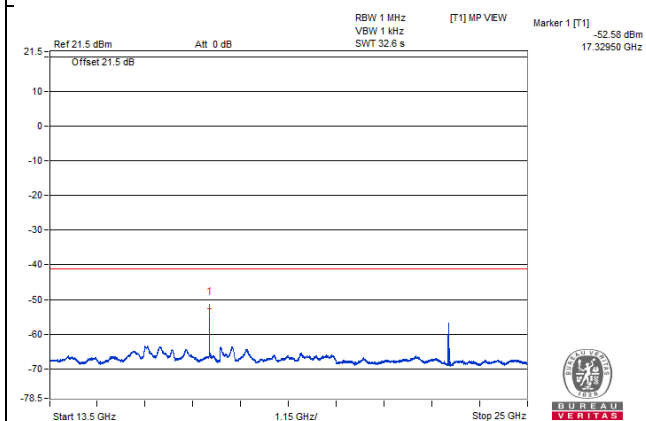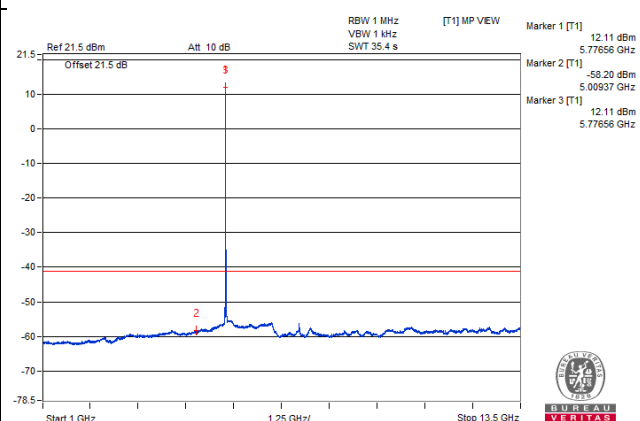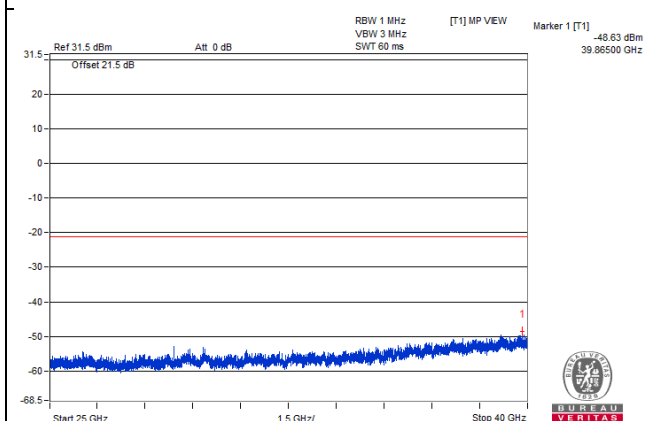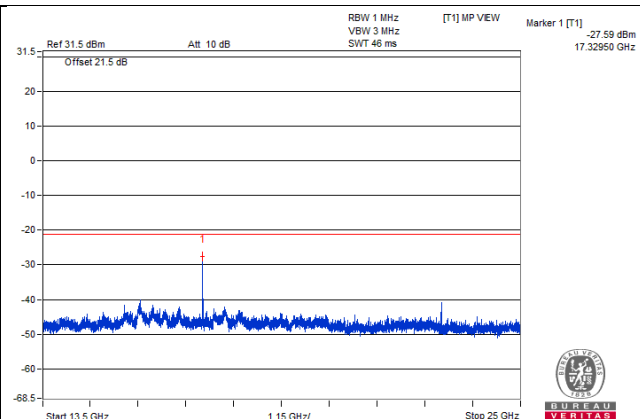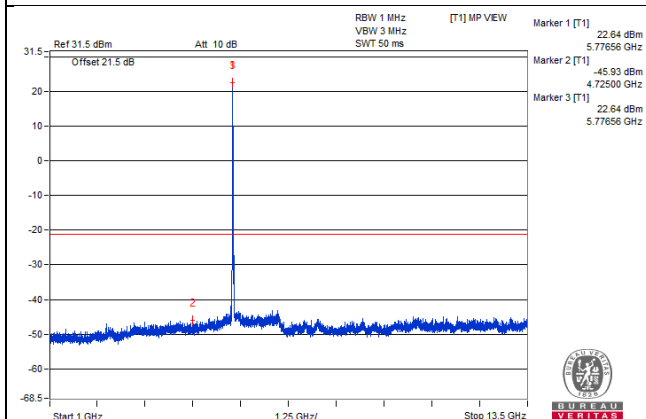


Bandedge table

Chain 0

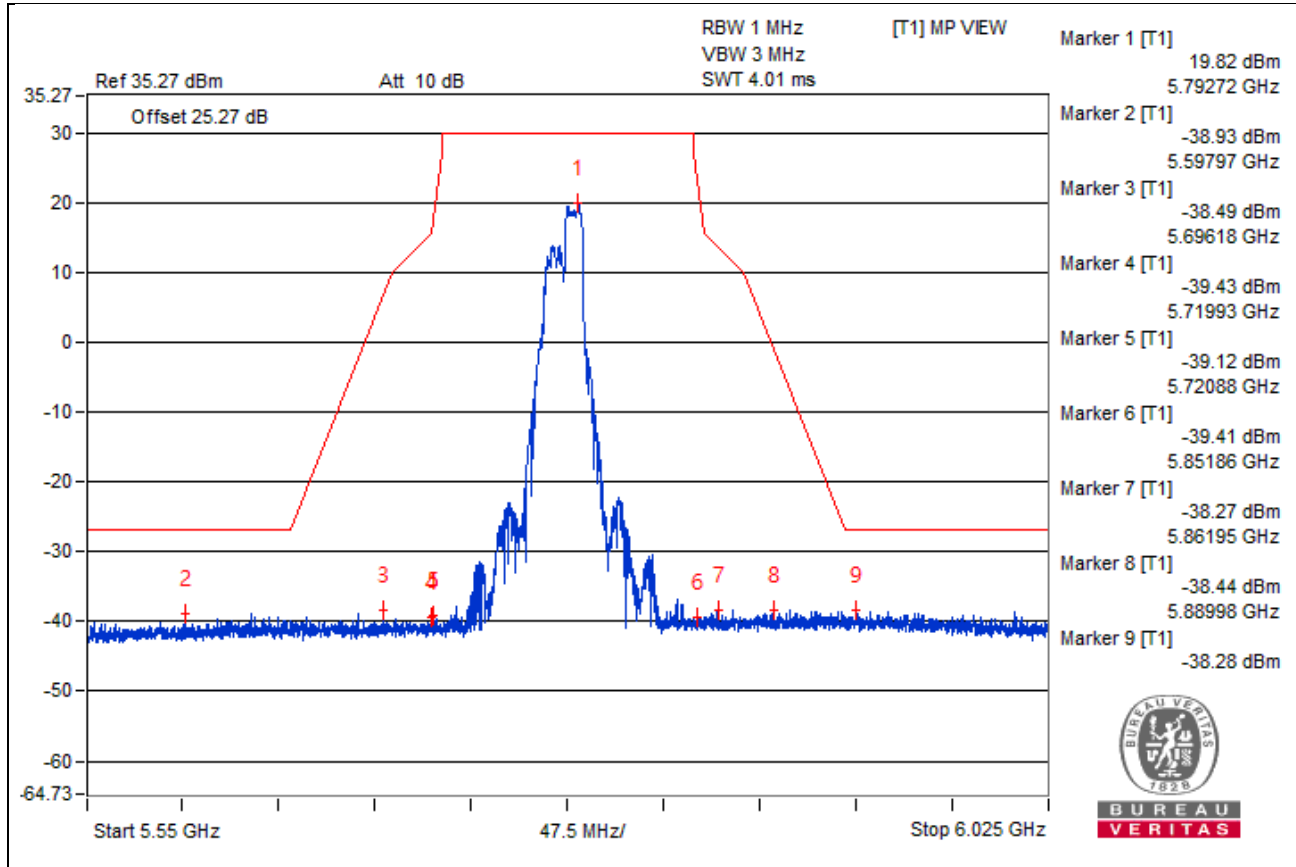

Chain 1

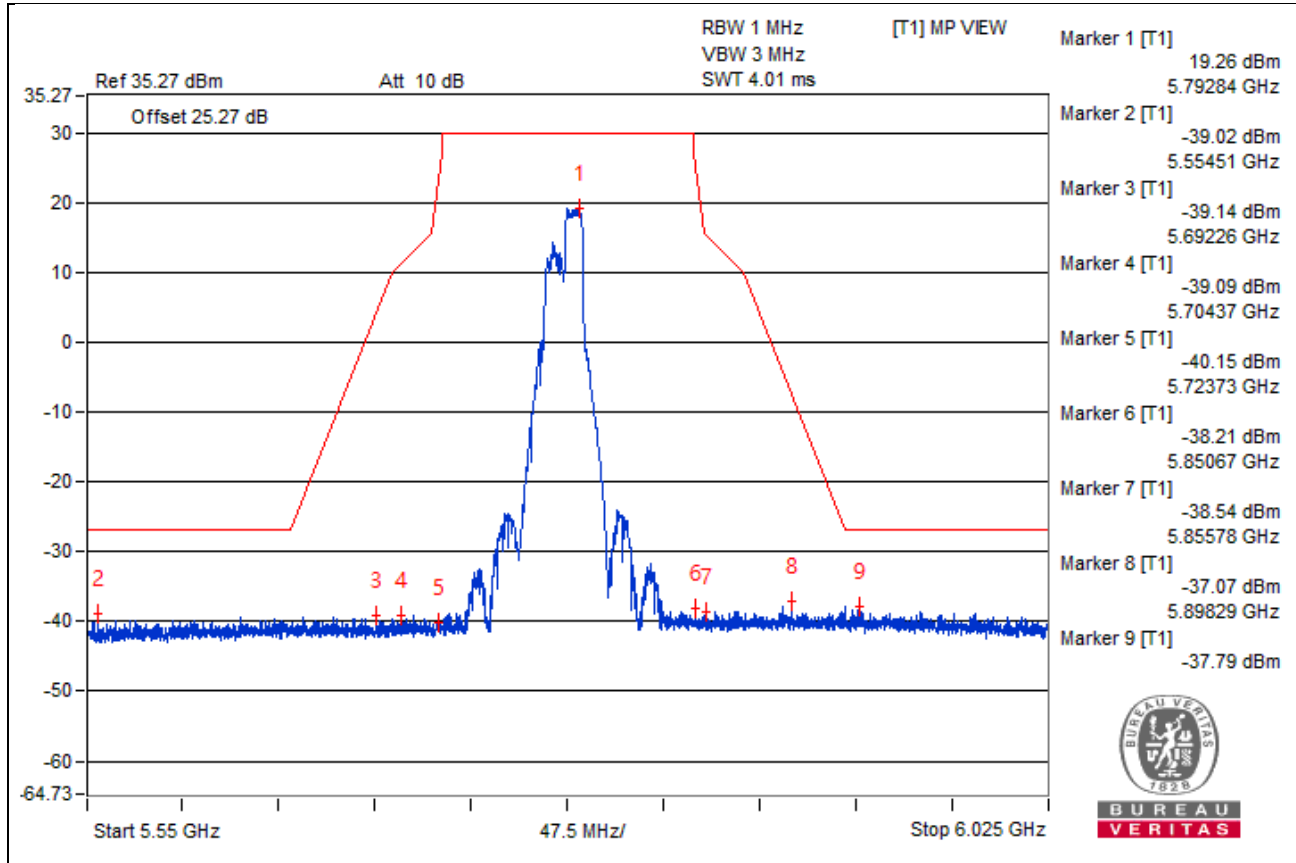

Channel 165

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3882.81 PK	57.58	74	-16.42	-47.71	-49.38	7.77	-37.68
2	3884.37 AV	46.09	54	-7.91	-60.04	-59.87	7.77	-49.17
3	7767.18 PK	57	68.2	-11.2	-49.94	-48.29	7.77	-38.26
4	11634.37 PK	60.34	74	-13.66	-46.43	-45.07	7.77	-34.92
5	11634.37 AV	48.82	54	-5.18	-56.7	-57.82	7.77	-46.44
6	17450.25 PK	70.83	68.2	* 2.63	-34.14	-36.62	7.77	-24.43

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.


* The unwanted emission was verified and the test result was passed by radiated measurement.

(Please refer APPENDIX B)

Chain 0

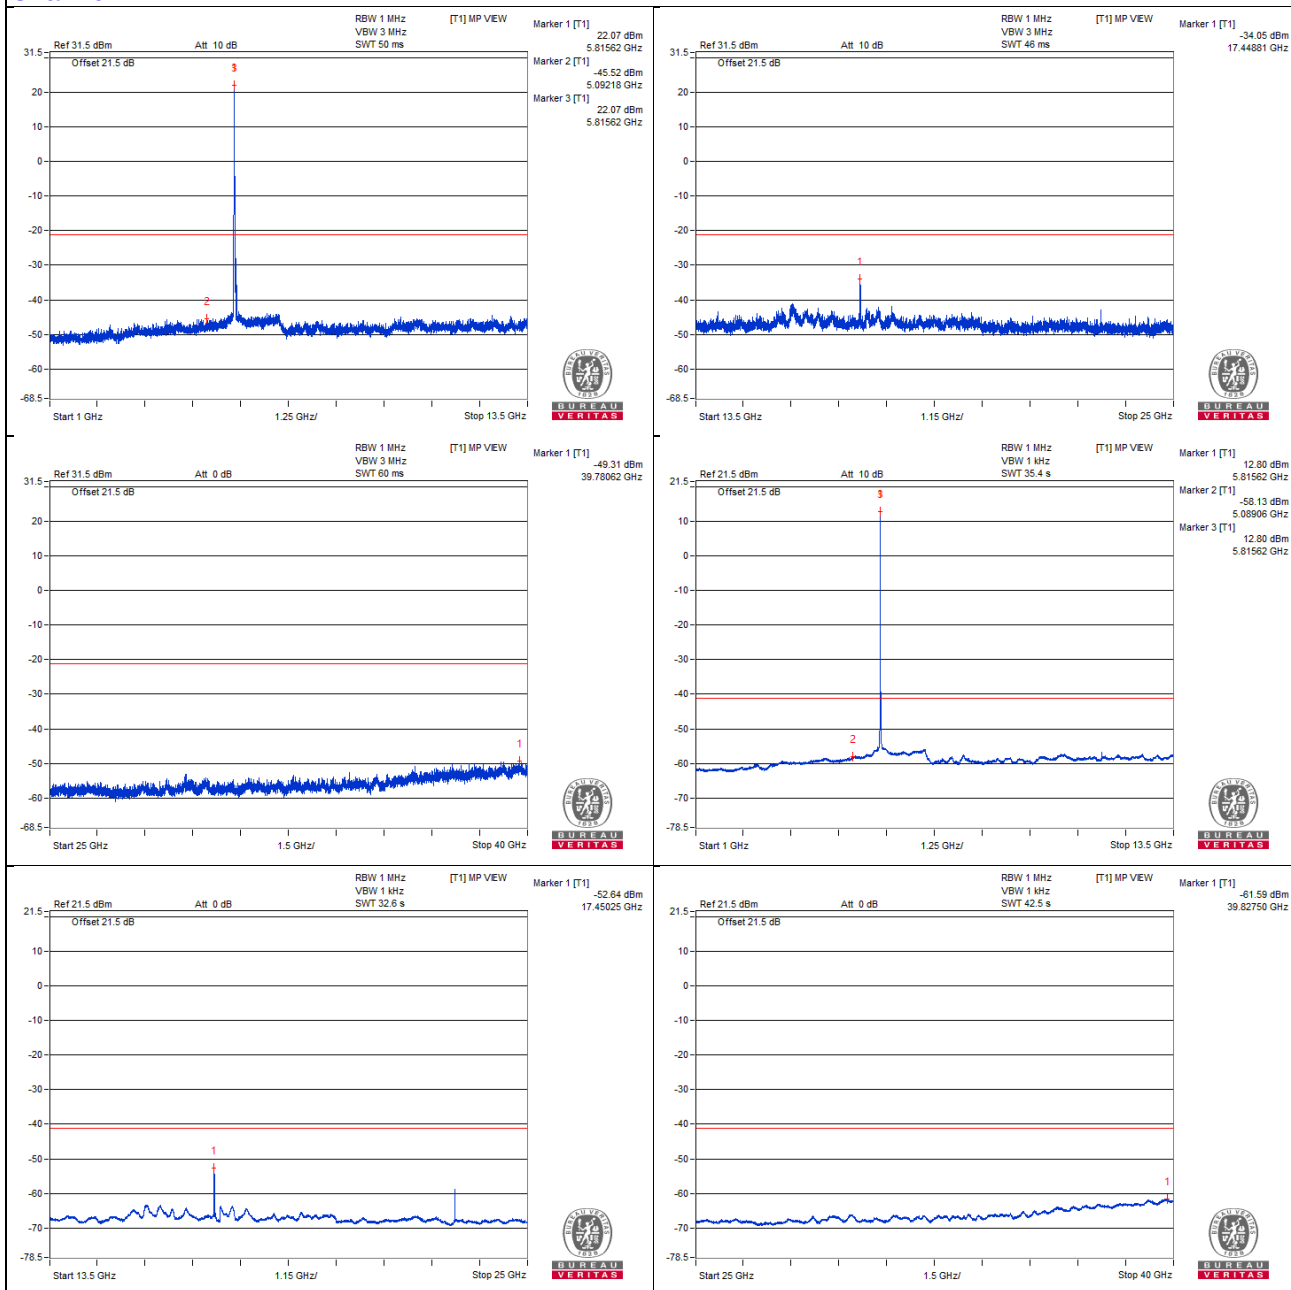


Chain 1

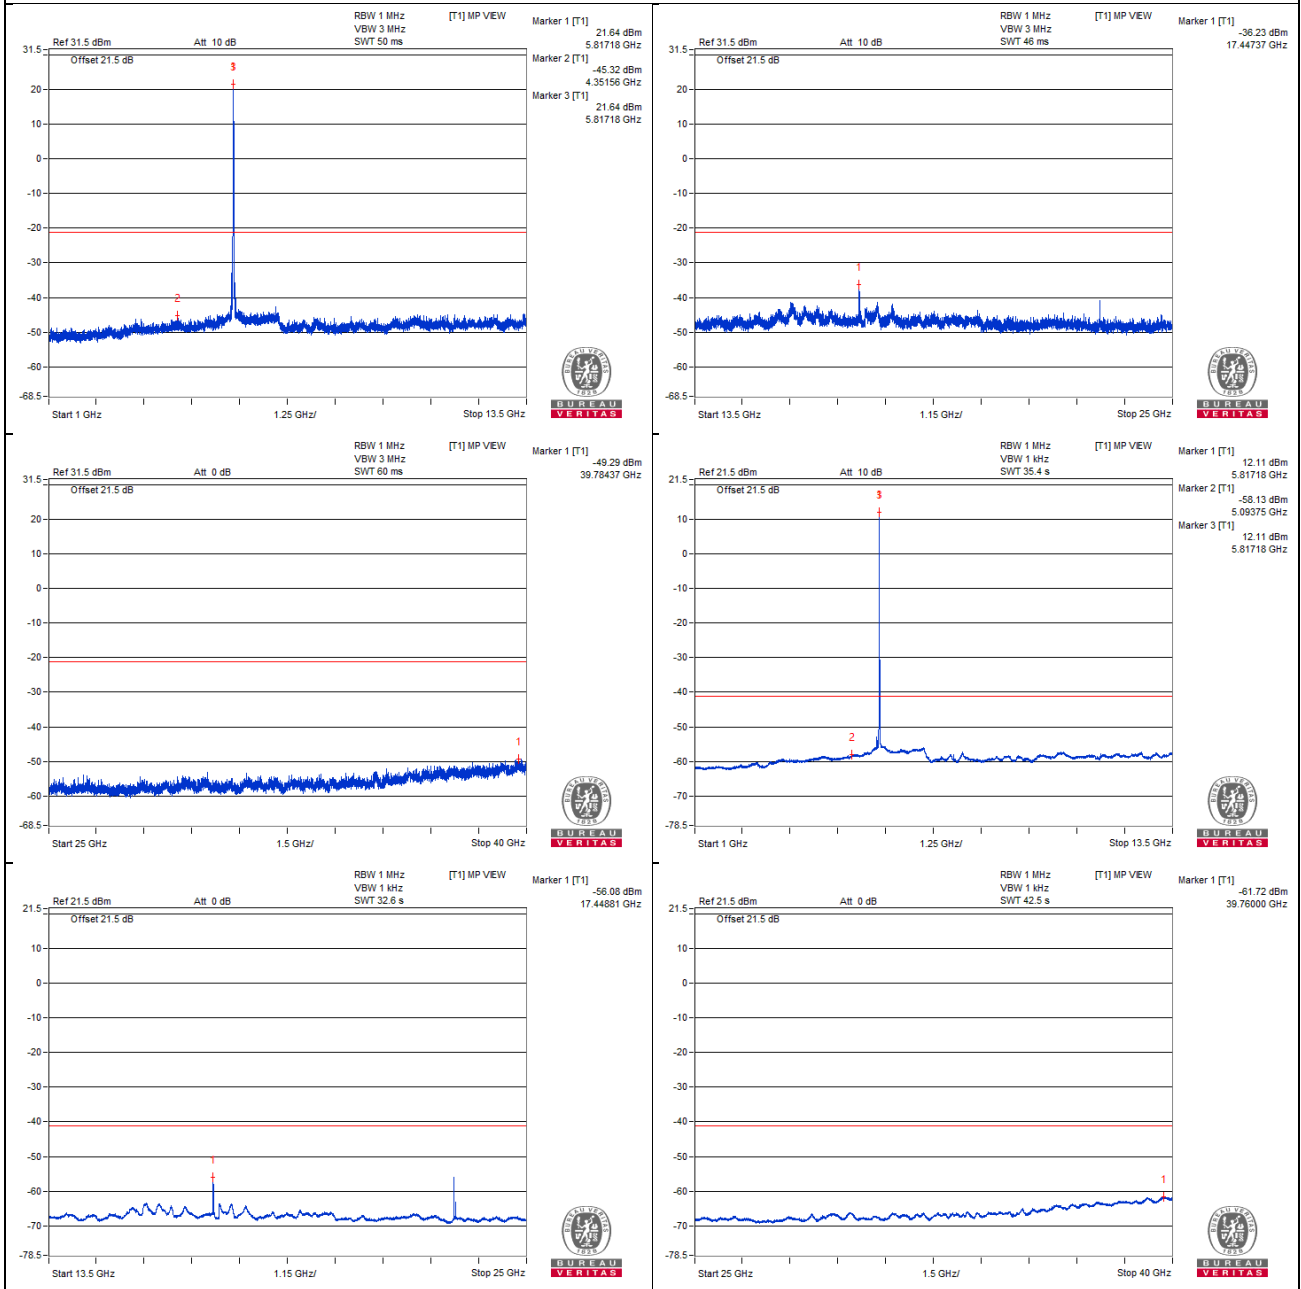


Bandedge table

Chain 0

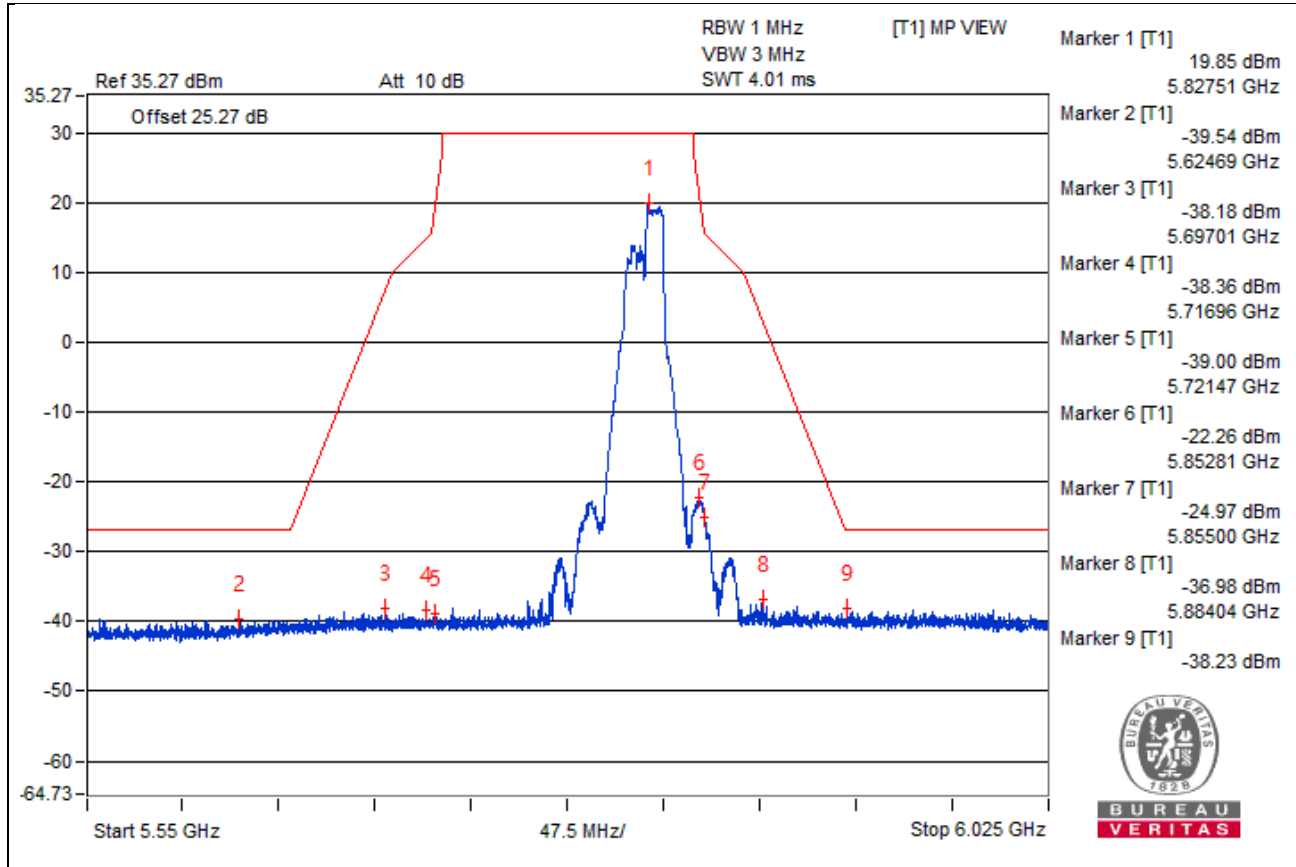

Chain 1

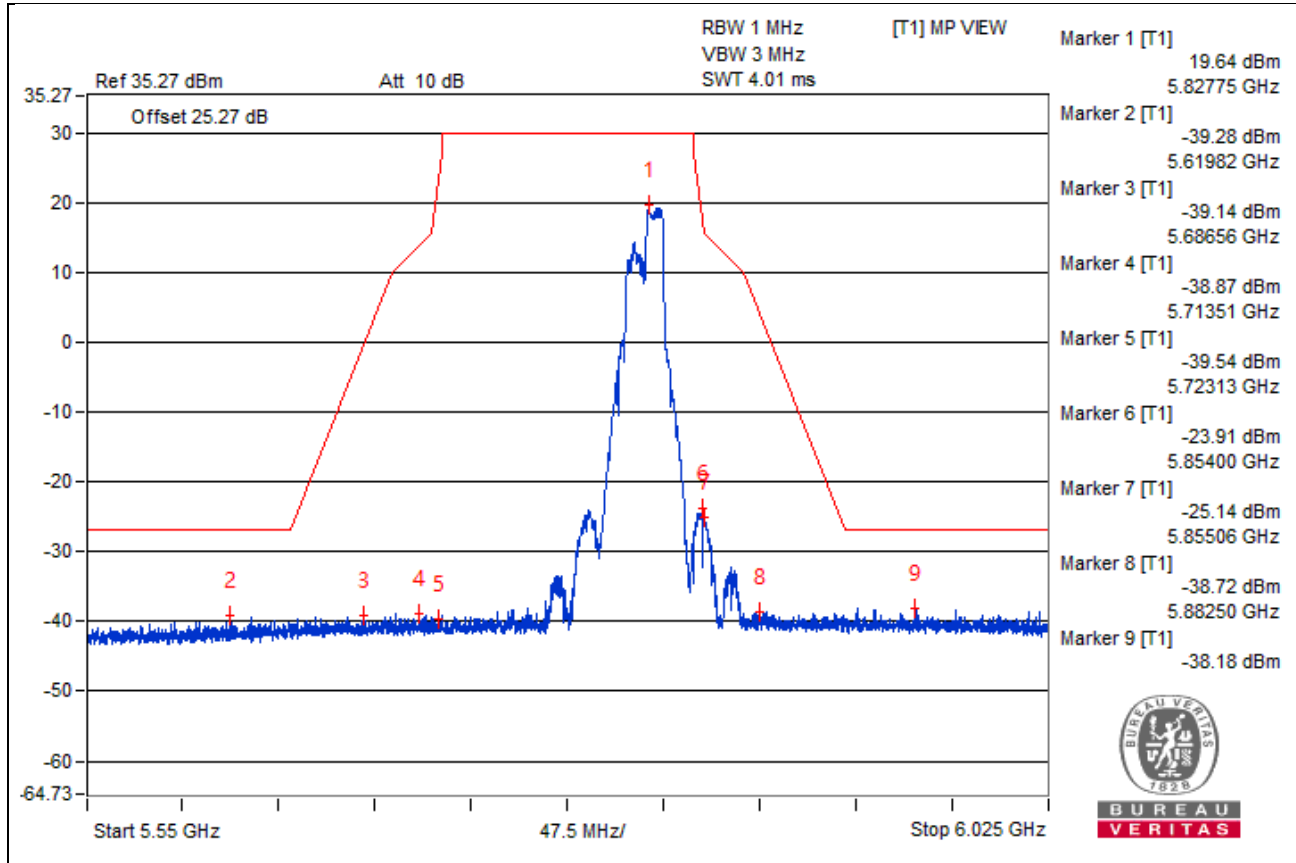

20MHz Preamble

RU242

Channel 36

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3431.25 PK	56.39	68.2	-11.81	-48.46	-47.53	6.09	-38.87
2	6906.25 PK	61.75	68.2	-6.45	-44.34	-41.37	6.09	-33.51
3	10321.87 PK	57.89	68.2	-10.31	-45.26	-48.16	6.09	-37.37
4	15498.12 PK	60.59	74	-13.41	-43.72	-43.82	6.09	-34.67
5	15541.25 AV	40.57	54	-13.43	-62.9	-64.92	6.09	-54.69

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

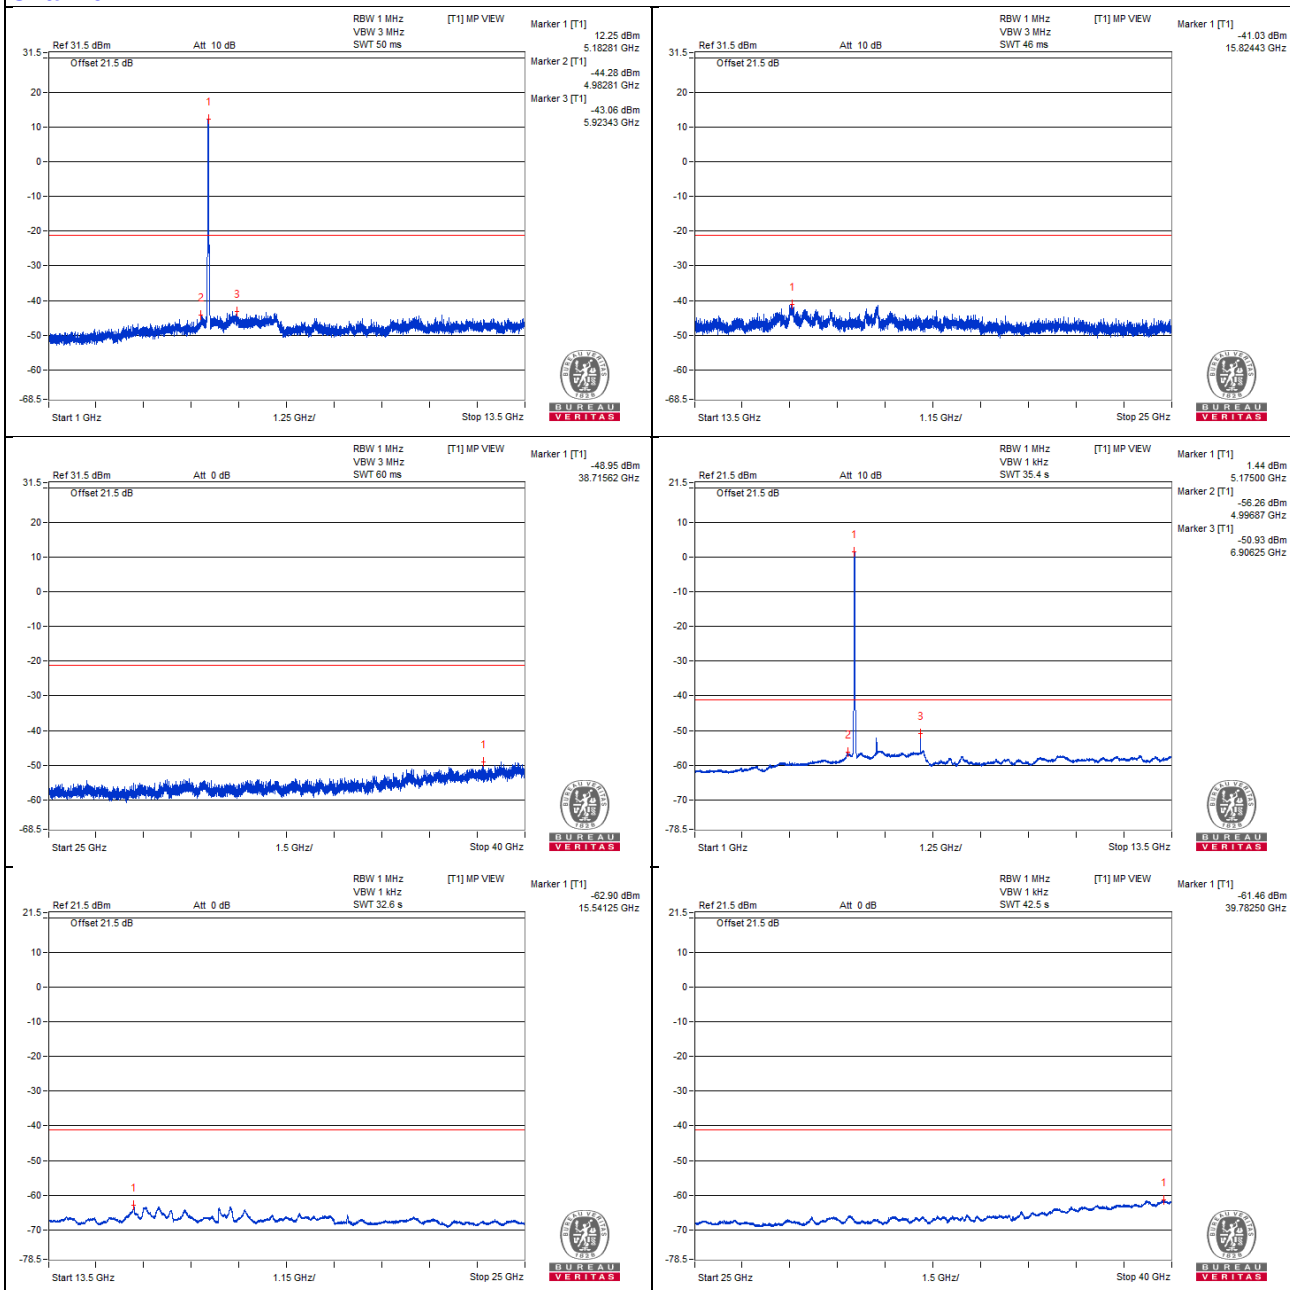

Chain 1

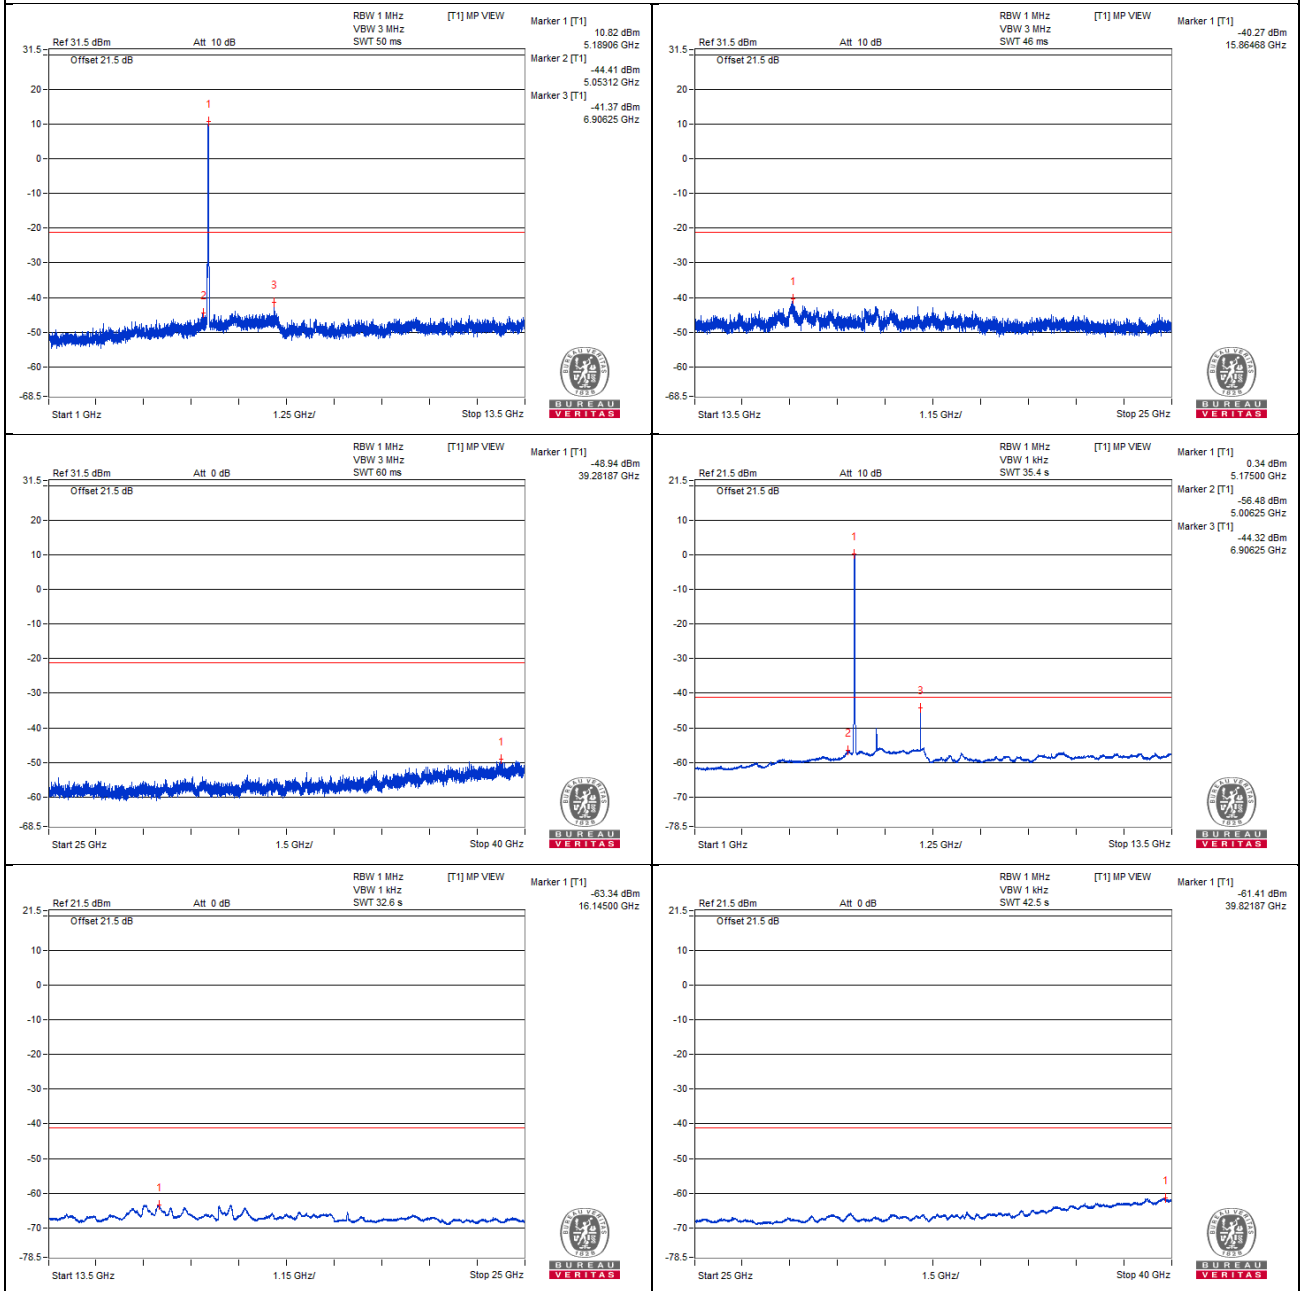

Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5149.87 PK	74.76	74	* 0.76	-29.39	-29.82	6.09	-20.5
2	5149.37 AV	56.84	54	* 2.84	-49.48	-46.17	6.09	-38.42


Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8


d = measurement distance in 3 meters.

* The unwanted emission was verified and the test result was passed by radiated measurement.
(Please refer APPENDIX B)

Chain 0

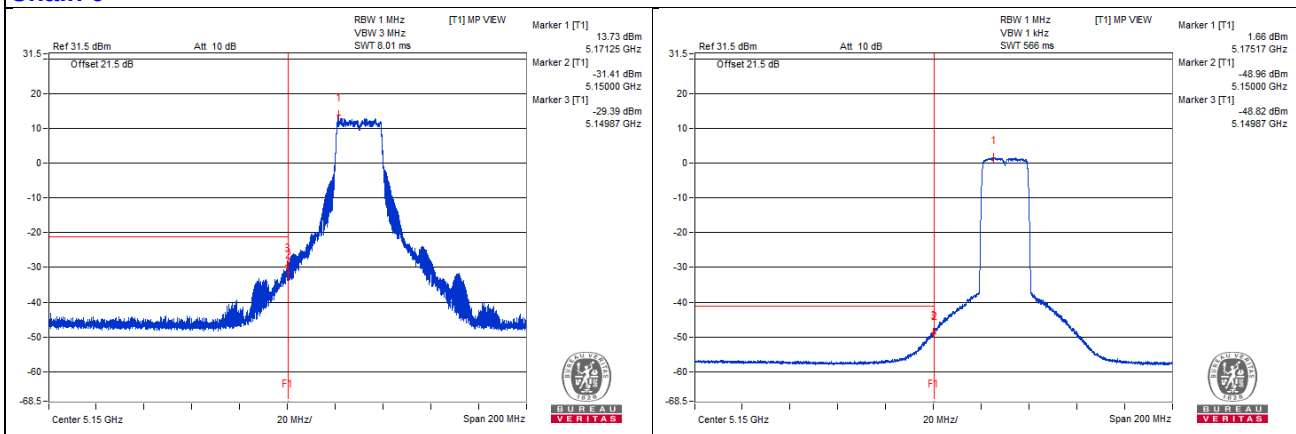

Chain 1

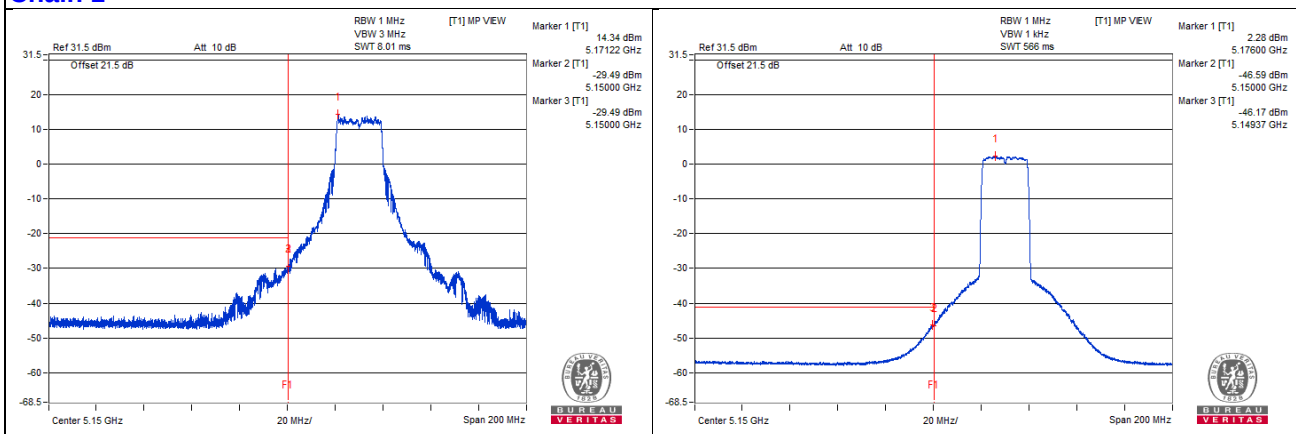

Channel 40

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3465.62 PK	55.34	68.2	-12.86	-48	-50.35	6.09	-39.92
2	6932.81 PK	62.67	68.2	-5.53	-43.8	-40.28	6.09	-32.59
3	10384.37 PK	57.18	68.2	-11.02	-46.6	-47.84	6.09	-38.08
4	15600.18 PK	61.33	74	-12.67	-42.11	-44.21	6.09	-33.93
5	15598.75 AV	43.87	54	-10.13	-59.44	-61.87	6.09	-51.39

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

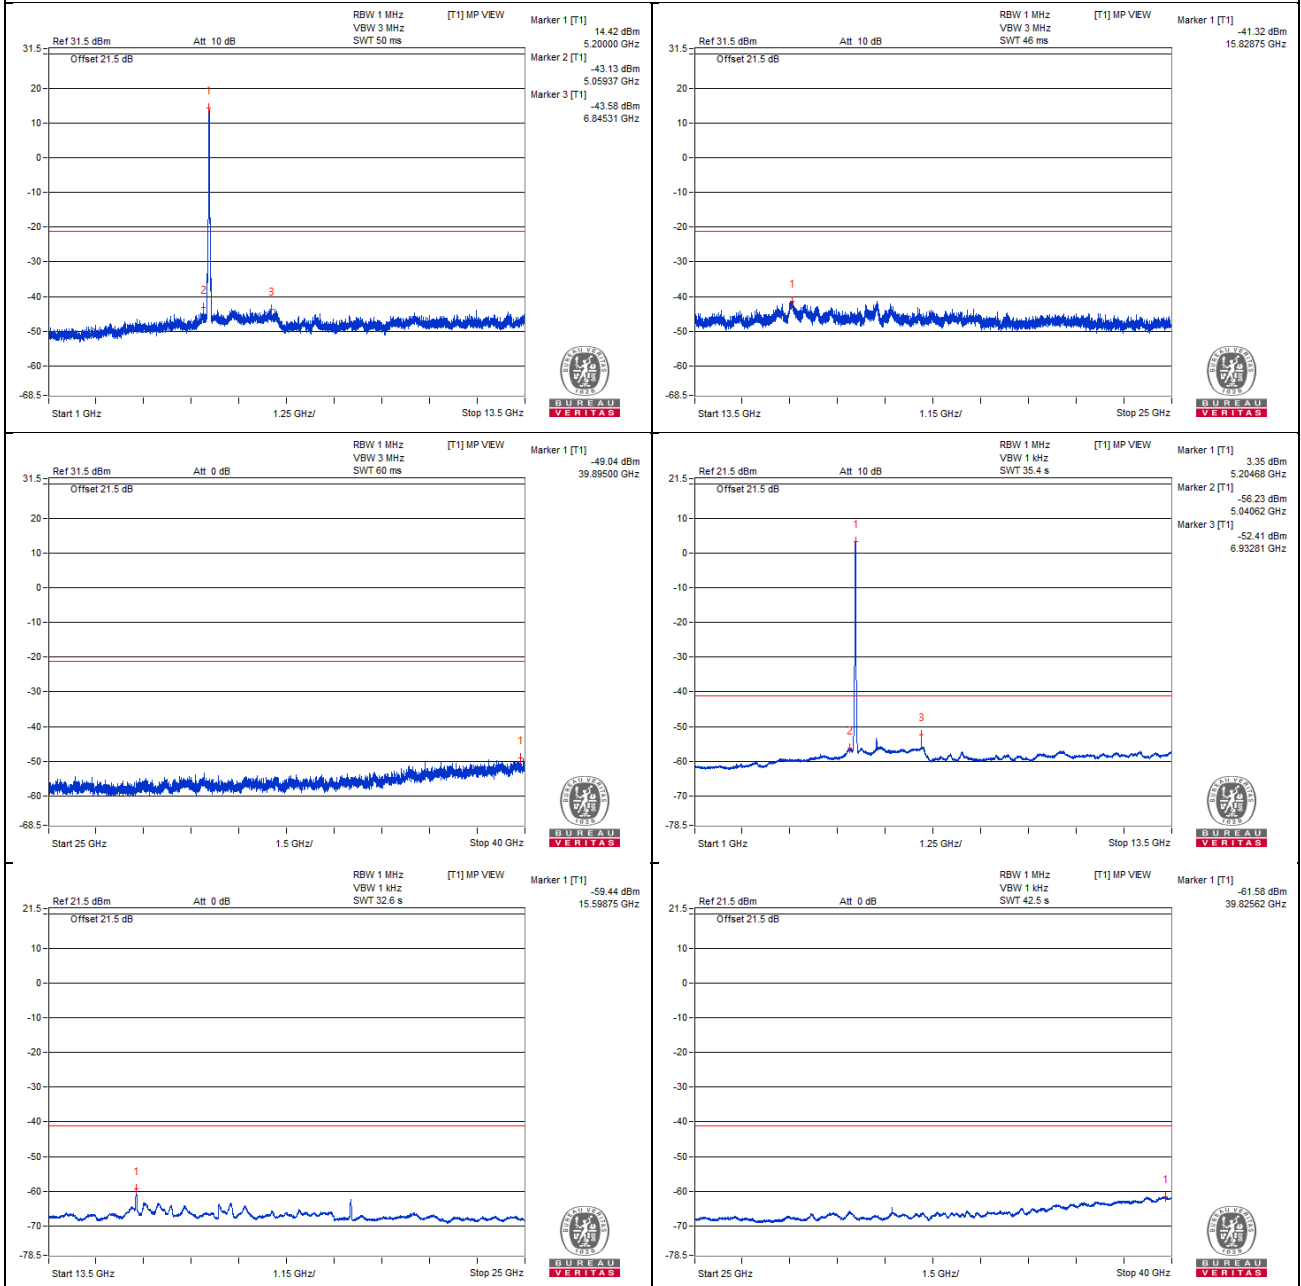

Chain 1

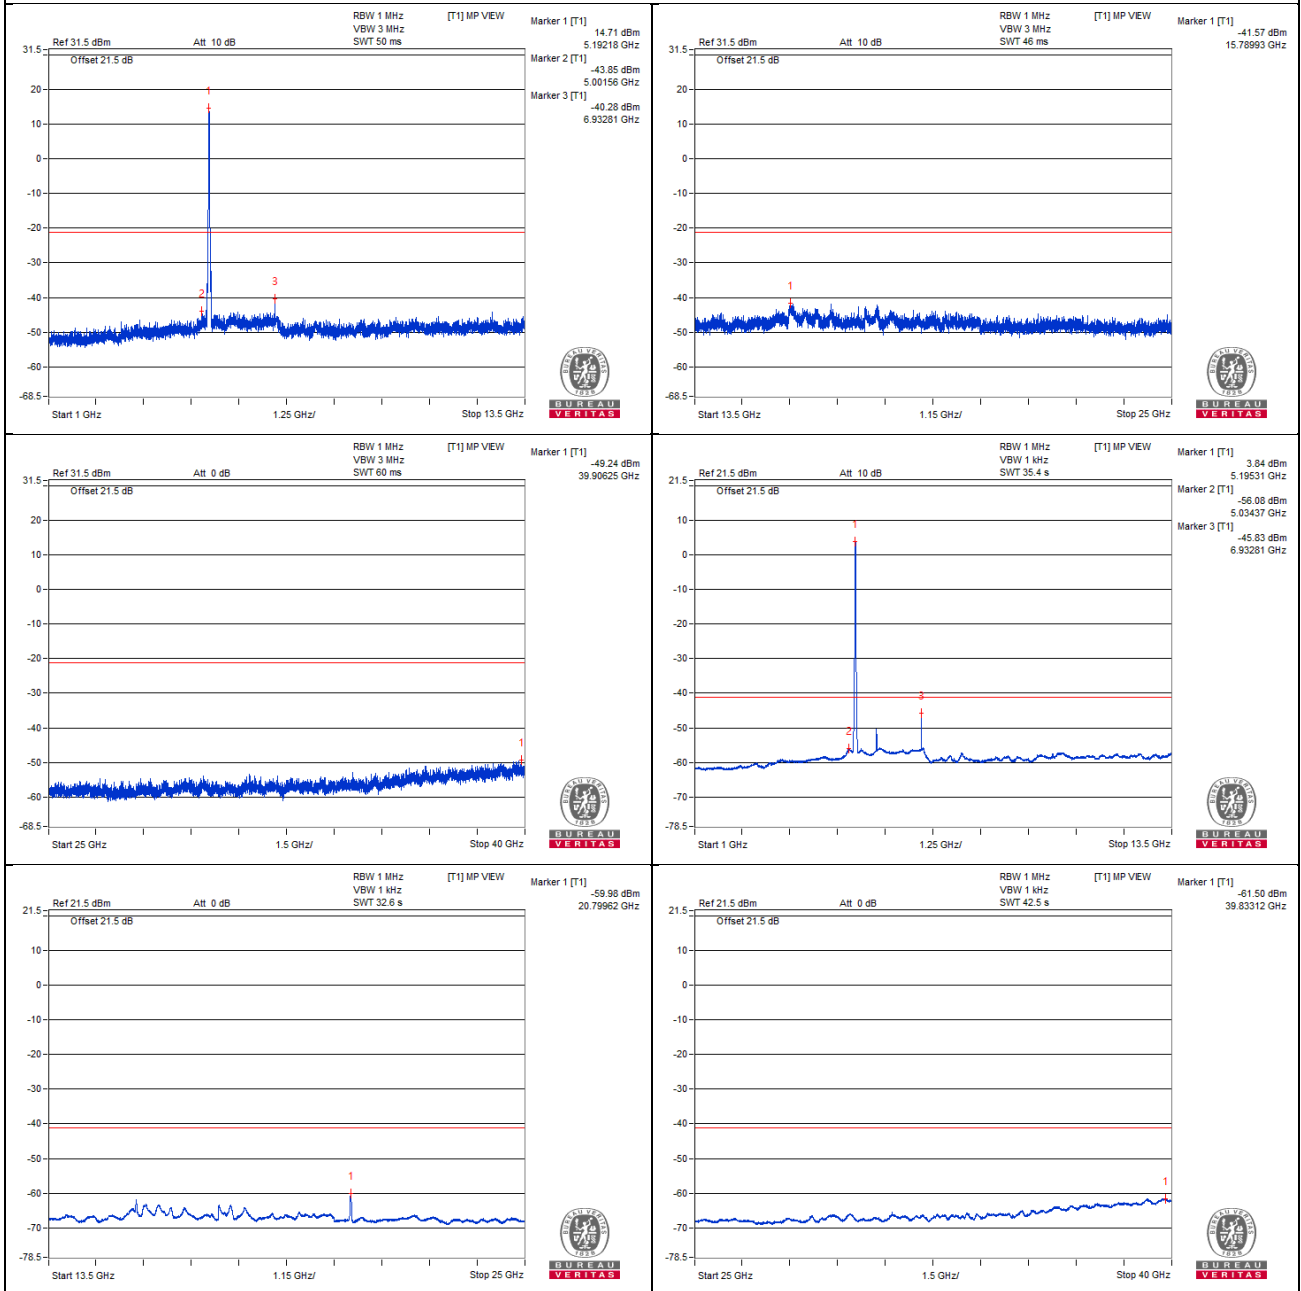

Bandedge table



No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5149.9 PK	71.07	74	-2.93	-33.2	-33.39	6.09	-24.19
2	5149.95 AV	49.83	54	-4.17	-55	-54.11	6.09	-45.43

Note :



Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

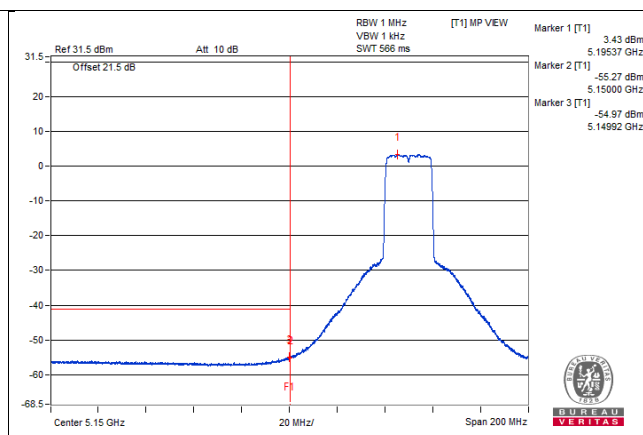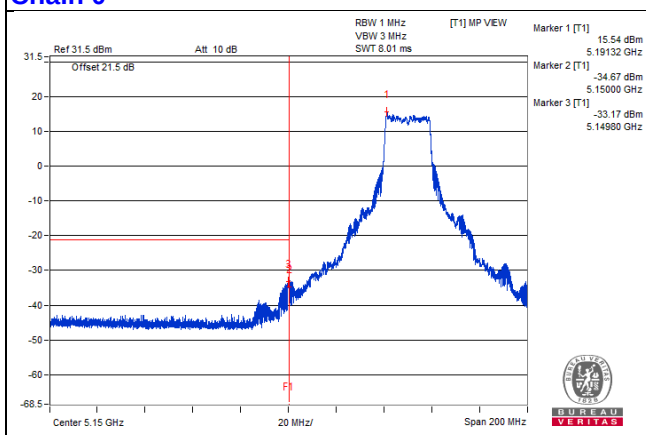

Chain 1

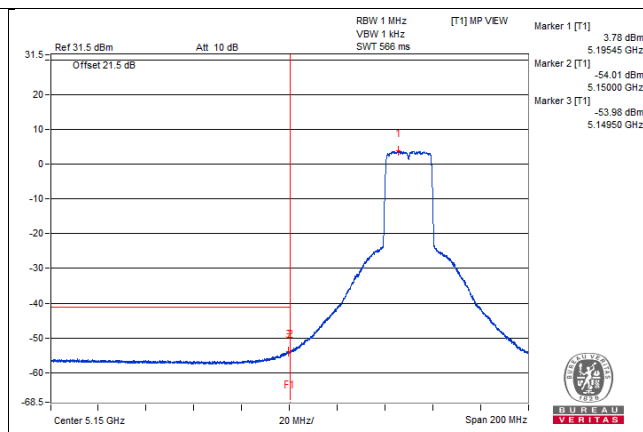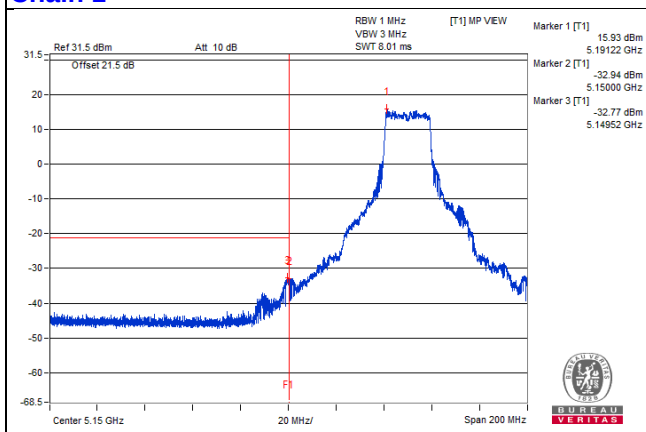

Channel 48

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3493.75 PK	55.3	68.2	-12.9	-48.26	-50.05	6.09	-39.96
2	6985.93 PK	60.98	68.2	-7.22	-44.77	-42.33	6.09	-34.28
3	10493.75 PK	58.15	68.2	-10.05	-47.26	-45.37	6.09	-37.11
4	15720.93 PK	59.54	74	-14.46	-43.44	-46.86	6.09	-35.72
5	15720.93 AV	42.54	54	-11.46	-61.09	-62.71	6.09	-52.72

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

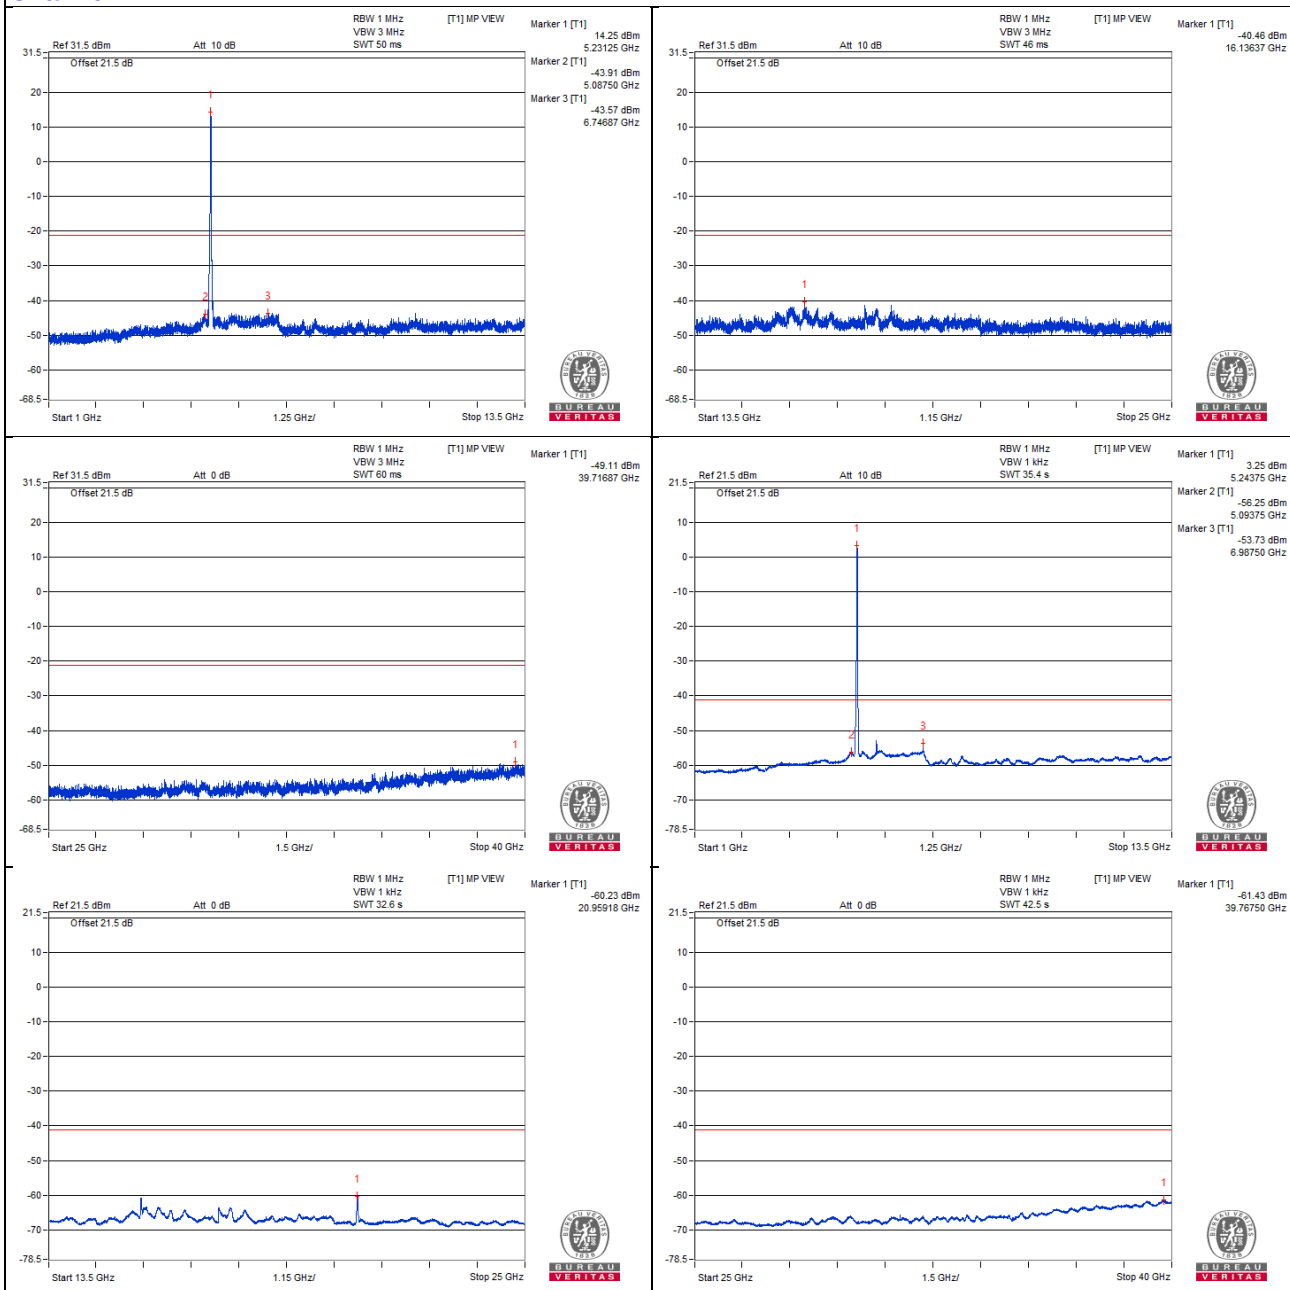

Chain 1

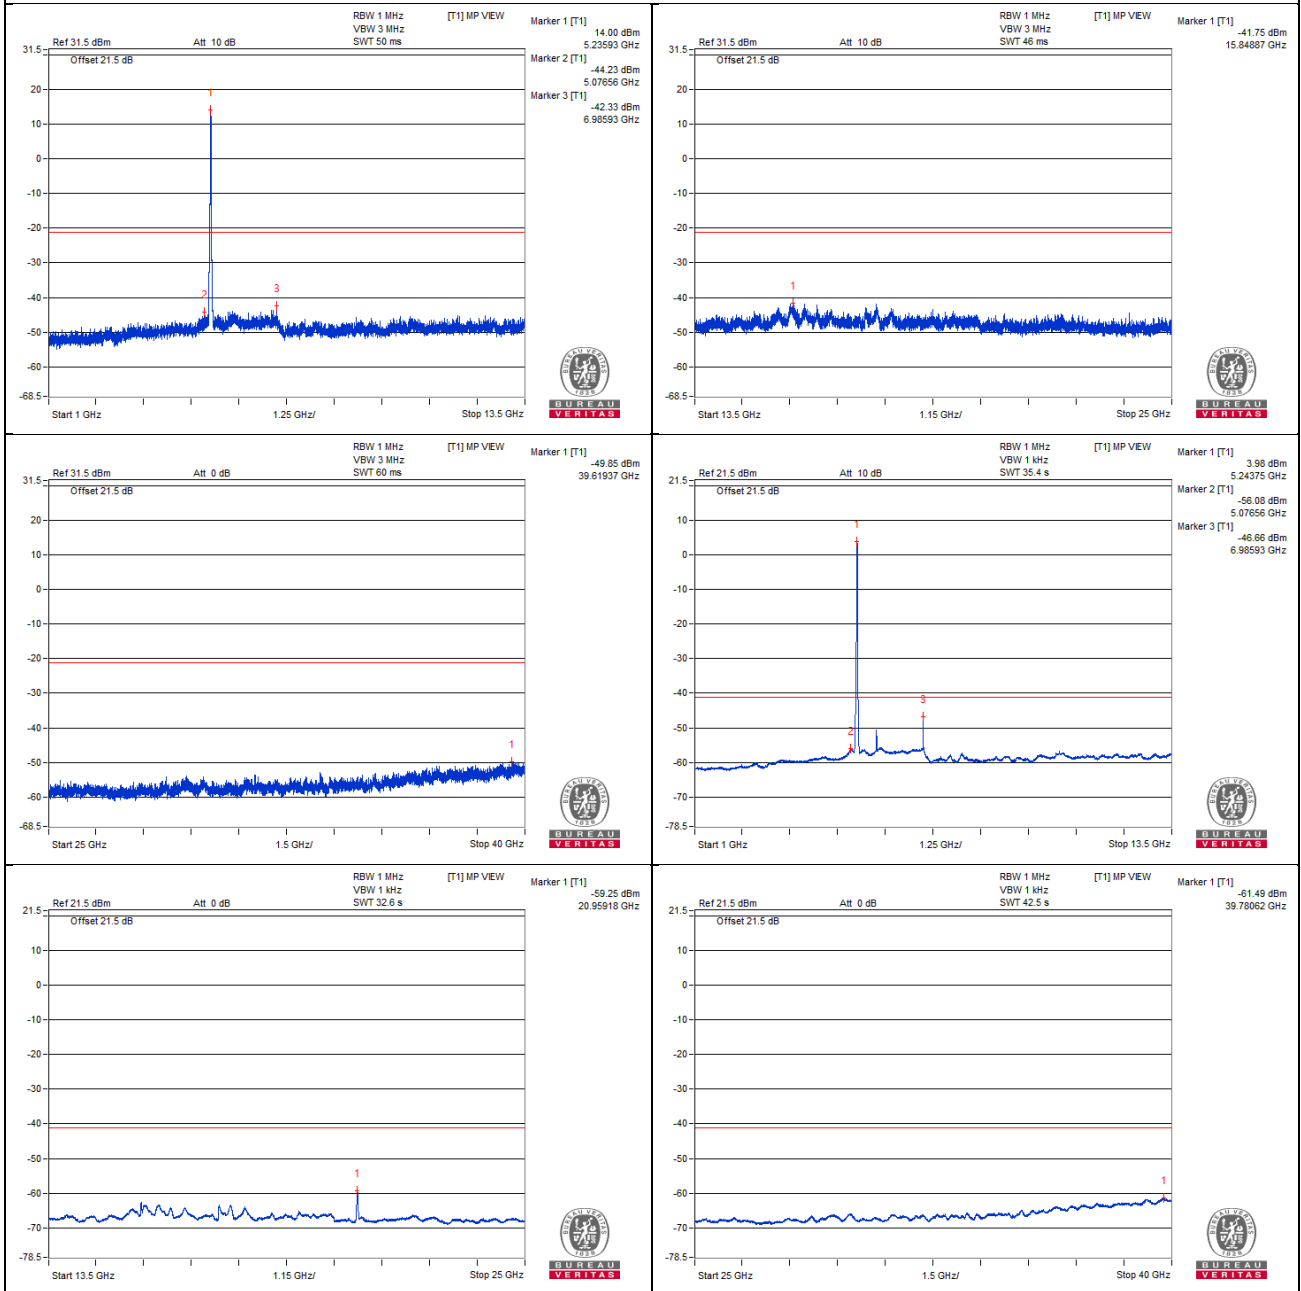

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5102.62 PK	61.25	74	-12.75	-44.71	-41.95	6.09	-34.01
2	5084.67 AV	48.26	54	-5.74	-56.34	-55.88	6.09	-47

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

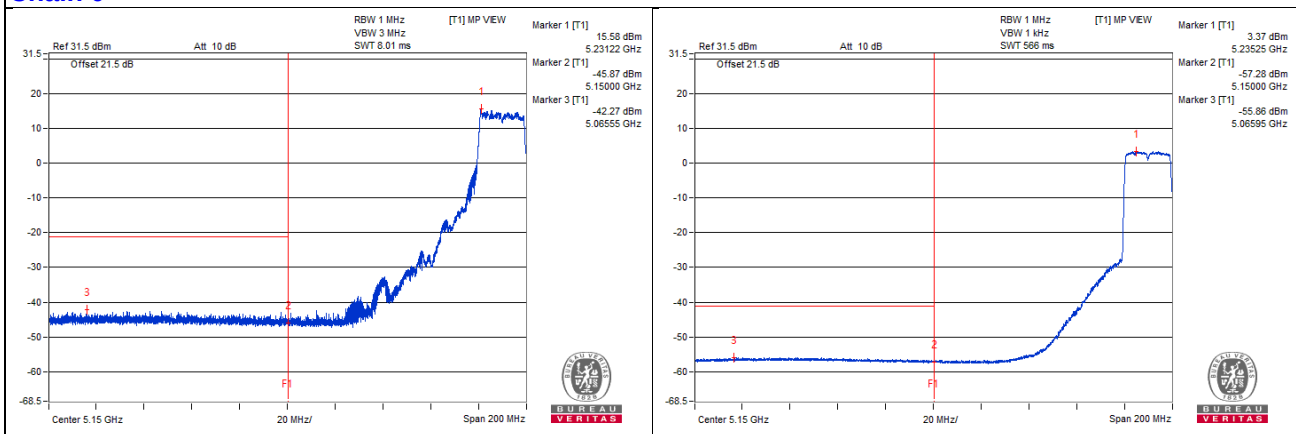

Chain 1

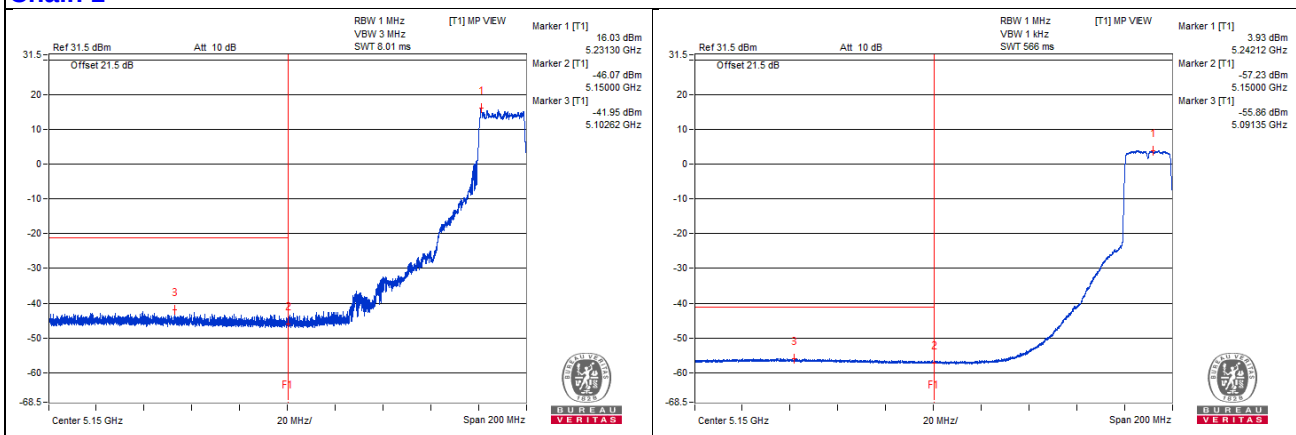

Channel 52

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3507.81 PK	54.87	74	-19.13	-49.23	-49.77	6.09	-40.39
2	3506.25 AV	44.61	54	-9.39	-59.77	-59.74	6.09	-50.65
3	7012.5 PK	58.1	68.2	-10.1	-46.61	-45.94	6.09	-37.16
4	10507.81 PK	58.07	68.2	-10.13	-44.85	-48.47	6.09	-37.19
5	15779.87 PK	61.94	74	-12.06	-42.27	-42.57	6.09	-33.32
6	15781.31 AV	42.46	54	-11.54	-63.69	-60.64	6.09	-52.8

Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

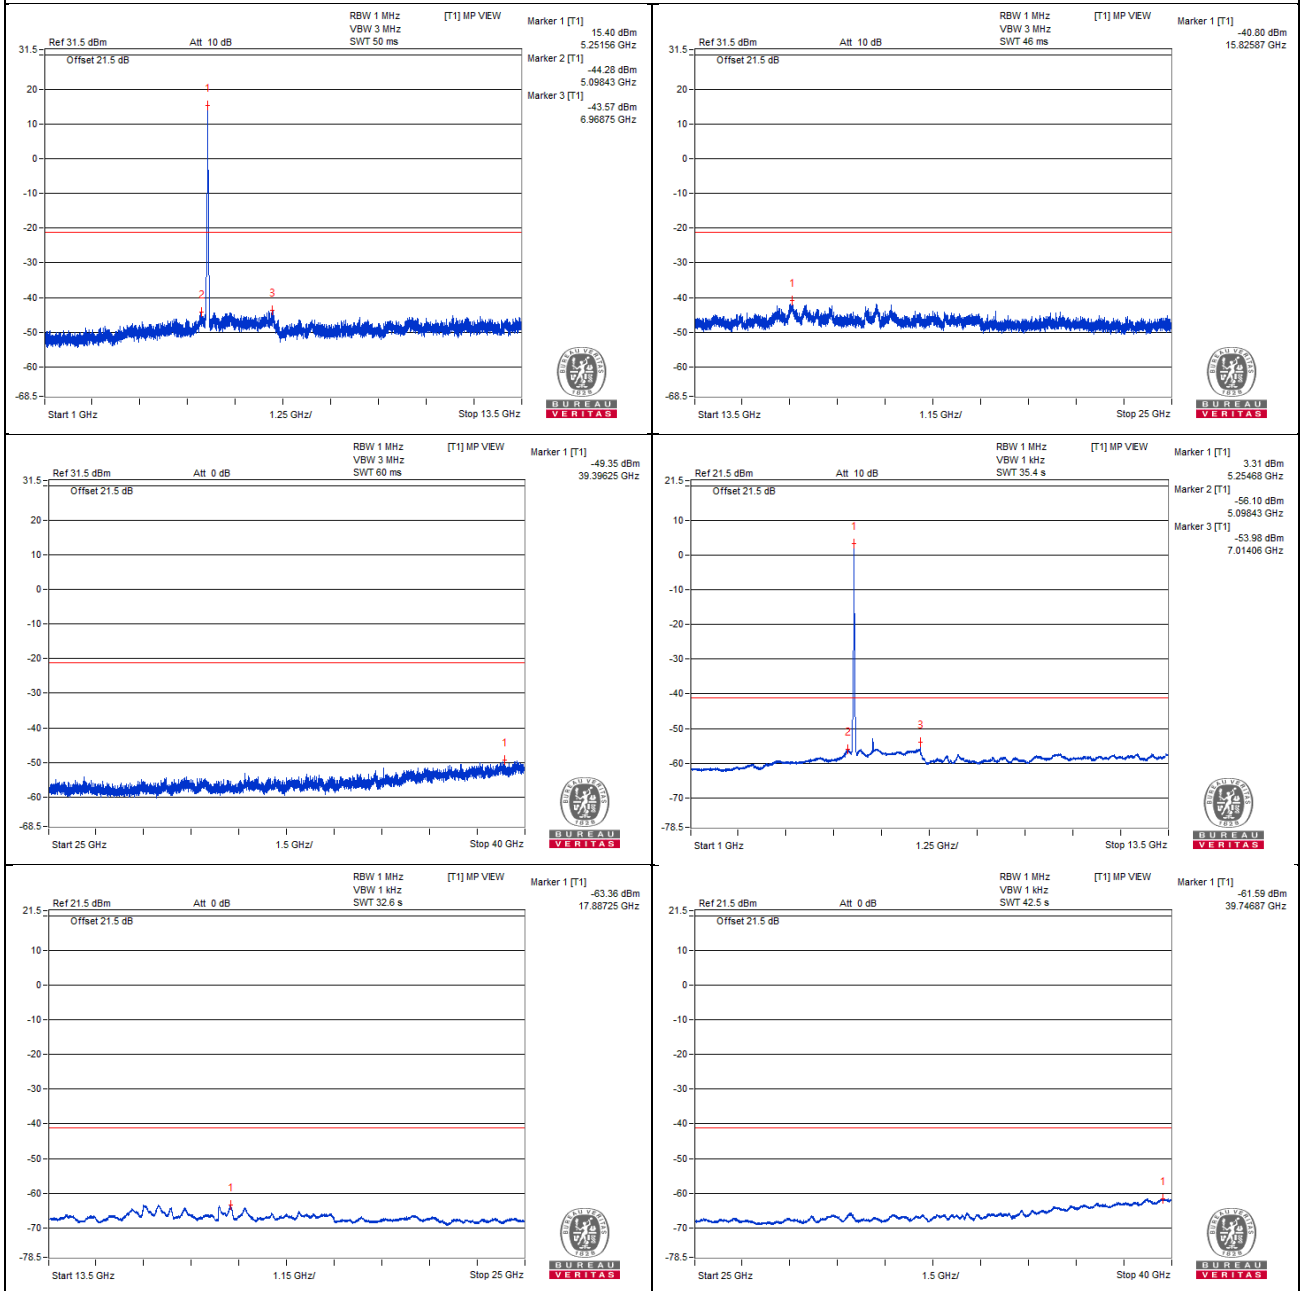

Chain 1

