

802.11ax (HE80) - Channel 122


Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3750 PK	57.06	74	-16.94	-48.68	-50.22	8.17	-38.2
2	3732.81 AV	36.07	54	-17.93	-70.33	-70.42	8.17	-59.19
3	7479.68 PK	58.51	74	-15.49	-47.55	-48.34	8.17	-36.75
4	7470.31 AV	37.24	54	-16.76	-68.98	-69.43	8.17	-58.02
5	11221.87 PK	60.54	74	-13.46	-45.76	-46.04	8.17	-34.72
6	11203.12 AV	39.01	54	-14.99	-67.51	-67.35	8.17	-56.25
7	16835 PK	52.95	68.2	-15.25	-52.34	-55.06	8.17	-42.31


Note :

1. Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8
d = measurement distance in 3 meters.
2. # : Non-restricted frequency, no limit for average emission.

Chain 0

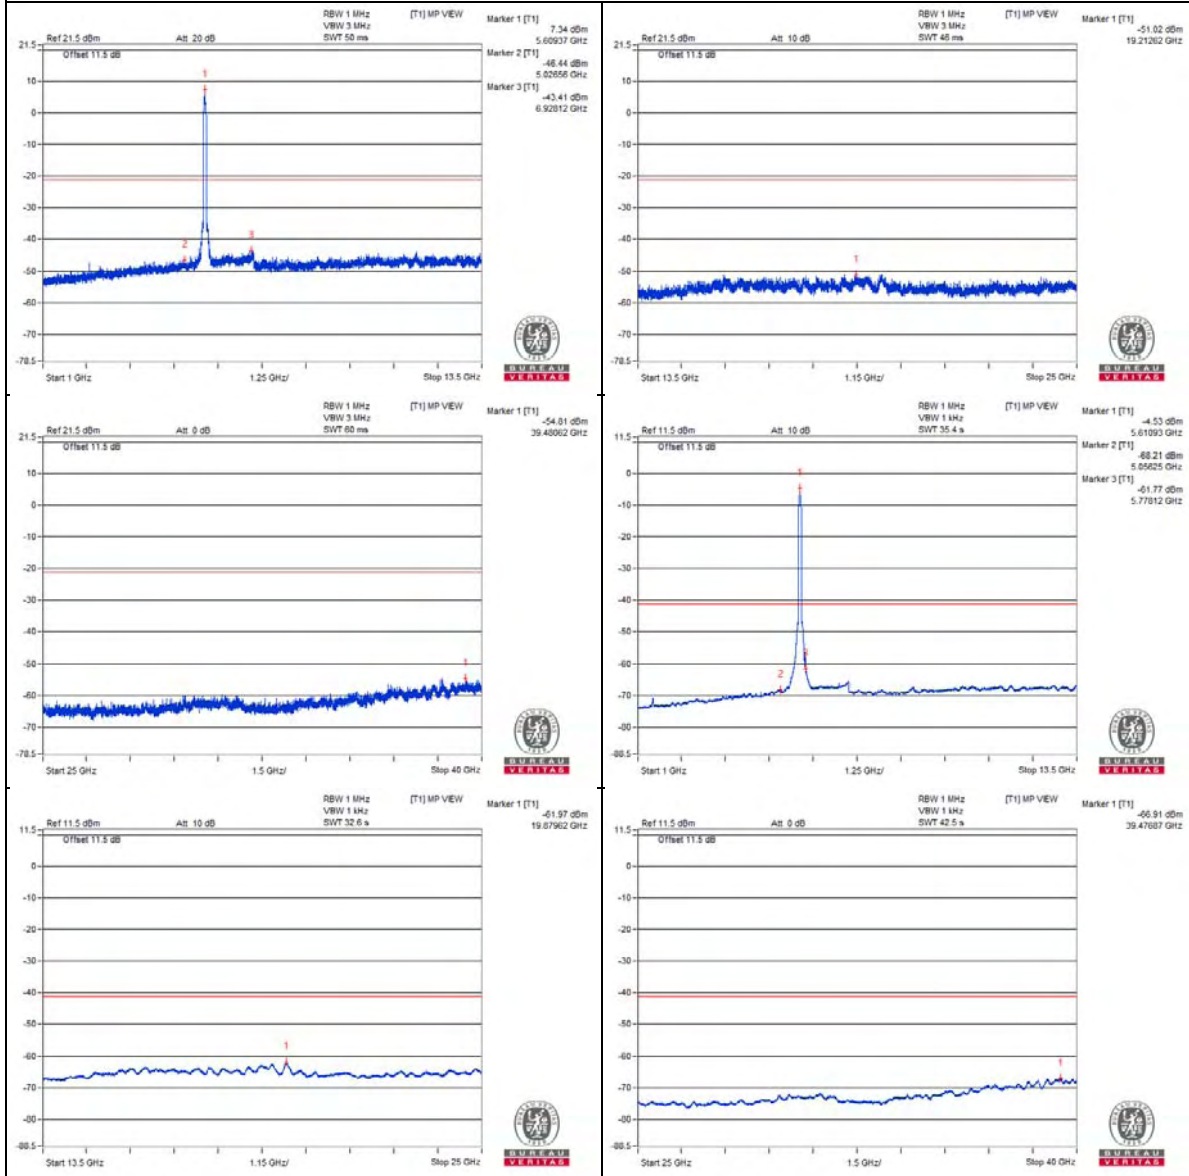

Chain 1

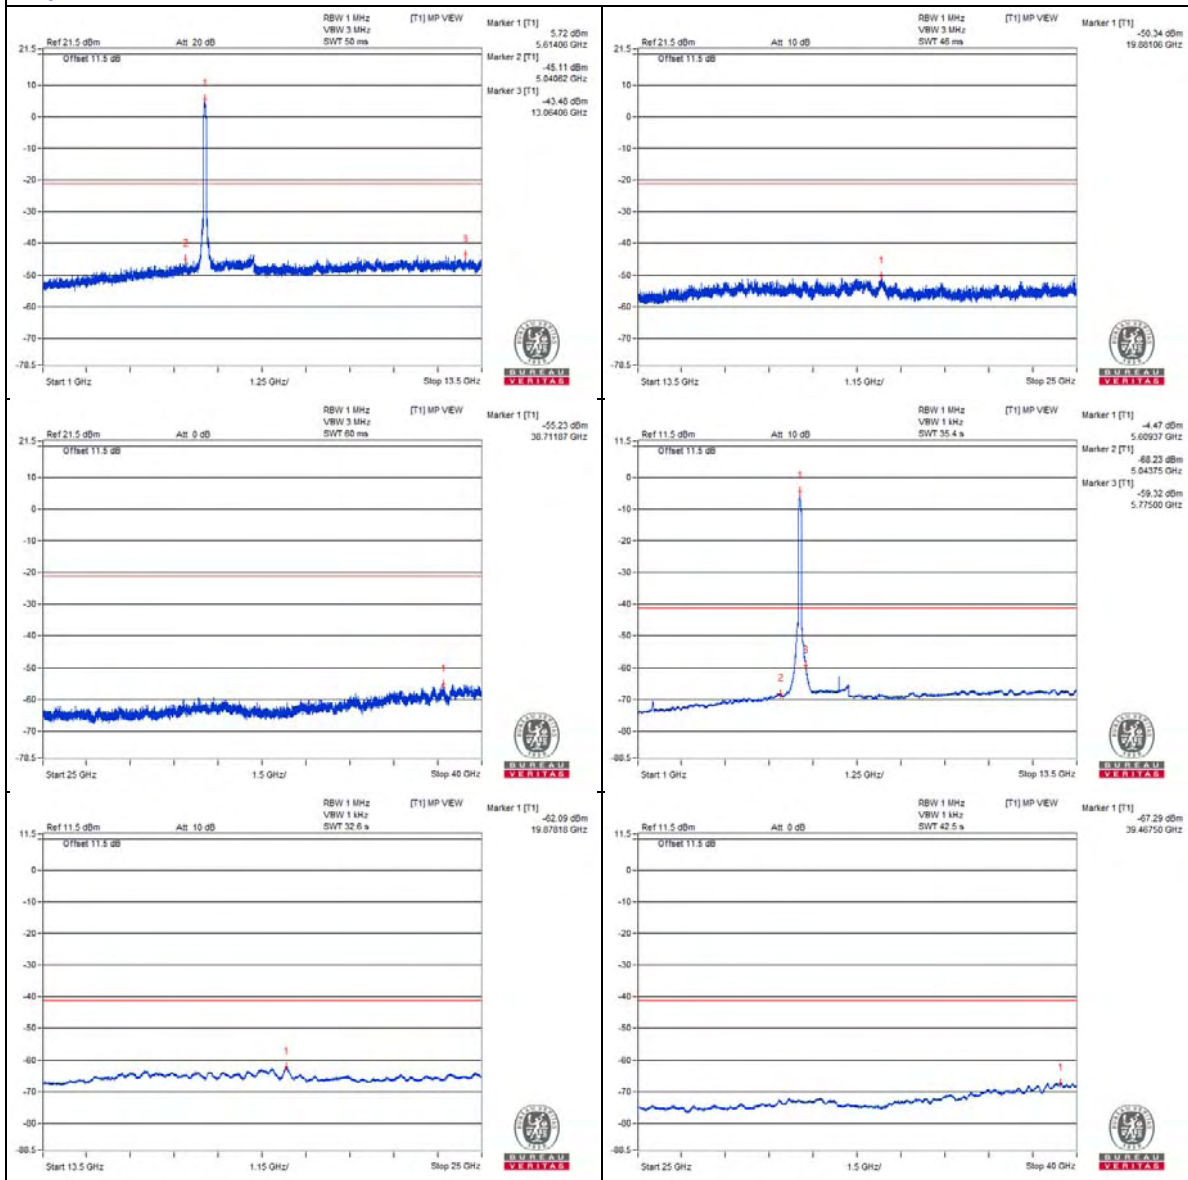

Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5729.72 PK	68.4	68.2	*0.2	-39.04	-36.66	7.82	-26.86

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.


* The unwanted emission was verified and the test result was passed by radiated measurement.

(Please refer APPENDIX B)

Chain 0

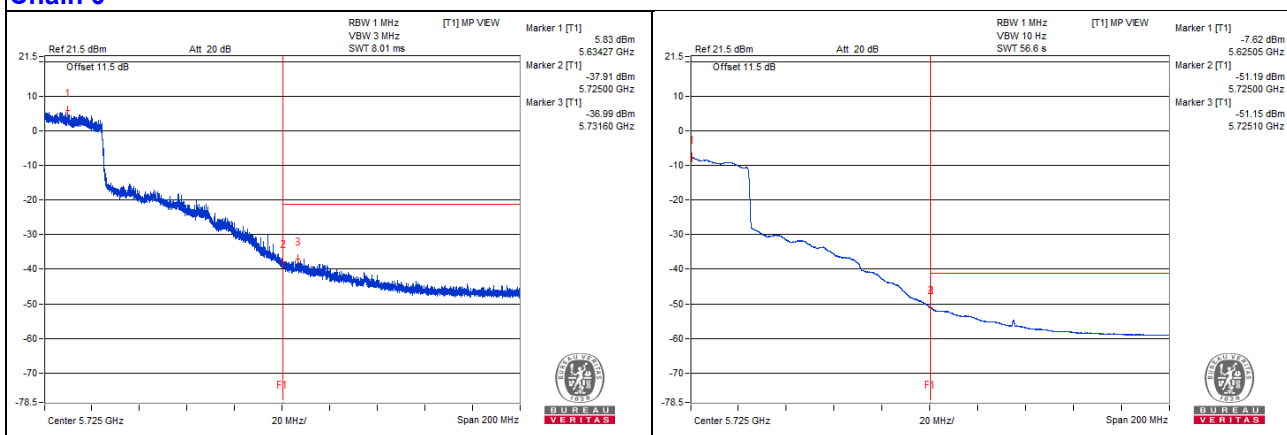

Chain 1

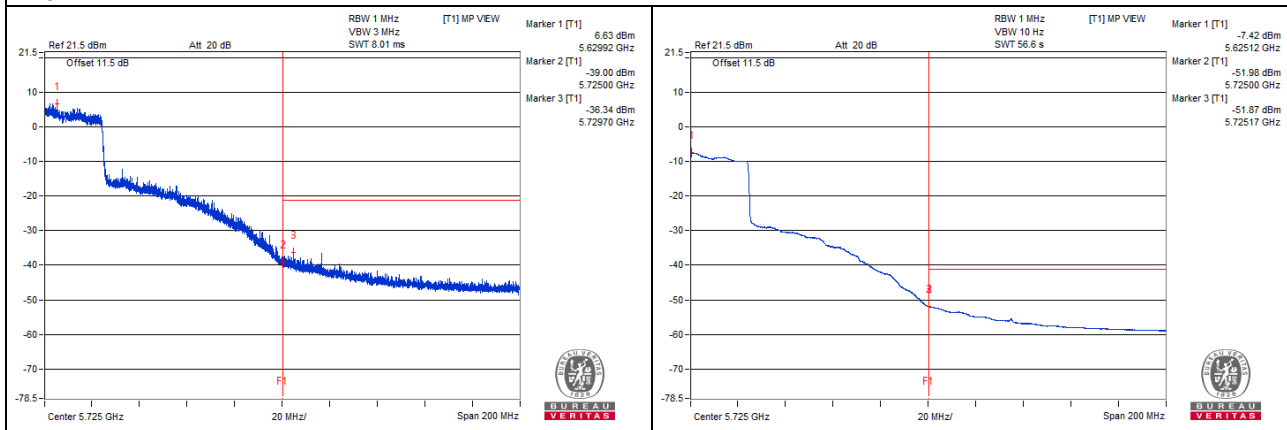

802.11ax (HE80) - Channel 138


Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3737.5 PK	57.64	74	-16.36	-49.18	-48.46	8.17	-37.62
2	3756.25 AV	36.07	54	-17.93	-70.28	-70.46	8.17	-59.19
3	7493.75 PK	58.63	74	-15.37	-47.79	-47.83	8.17	-36.63
4	7460.93 AV	37.24	54	-16.76	-69.11	-69.29	8.17	-58.02
5	11209.37 PK	60.32	74	-13.68	-45.05	-47.53	8.17	-34.94
6	11221.87 AV	38.83	54	-15.17	-67.59	-67.63	8.17	-56.43
7	16814.87 PK	53.12	68.2	-15.08	-54.12	-52.65	8.17	-42.14


Note :

1. Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8
d = measurement distance in 3 meters.
2. # : Non-restricted frequency, no limit for average emission.

Chain 0

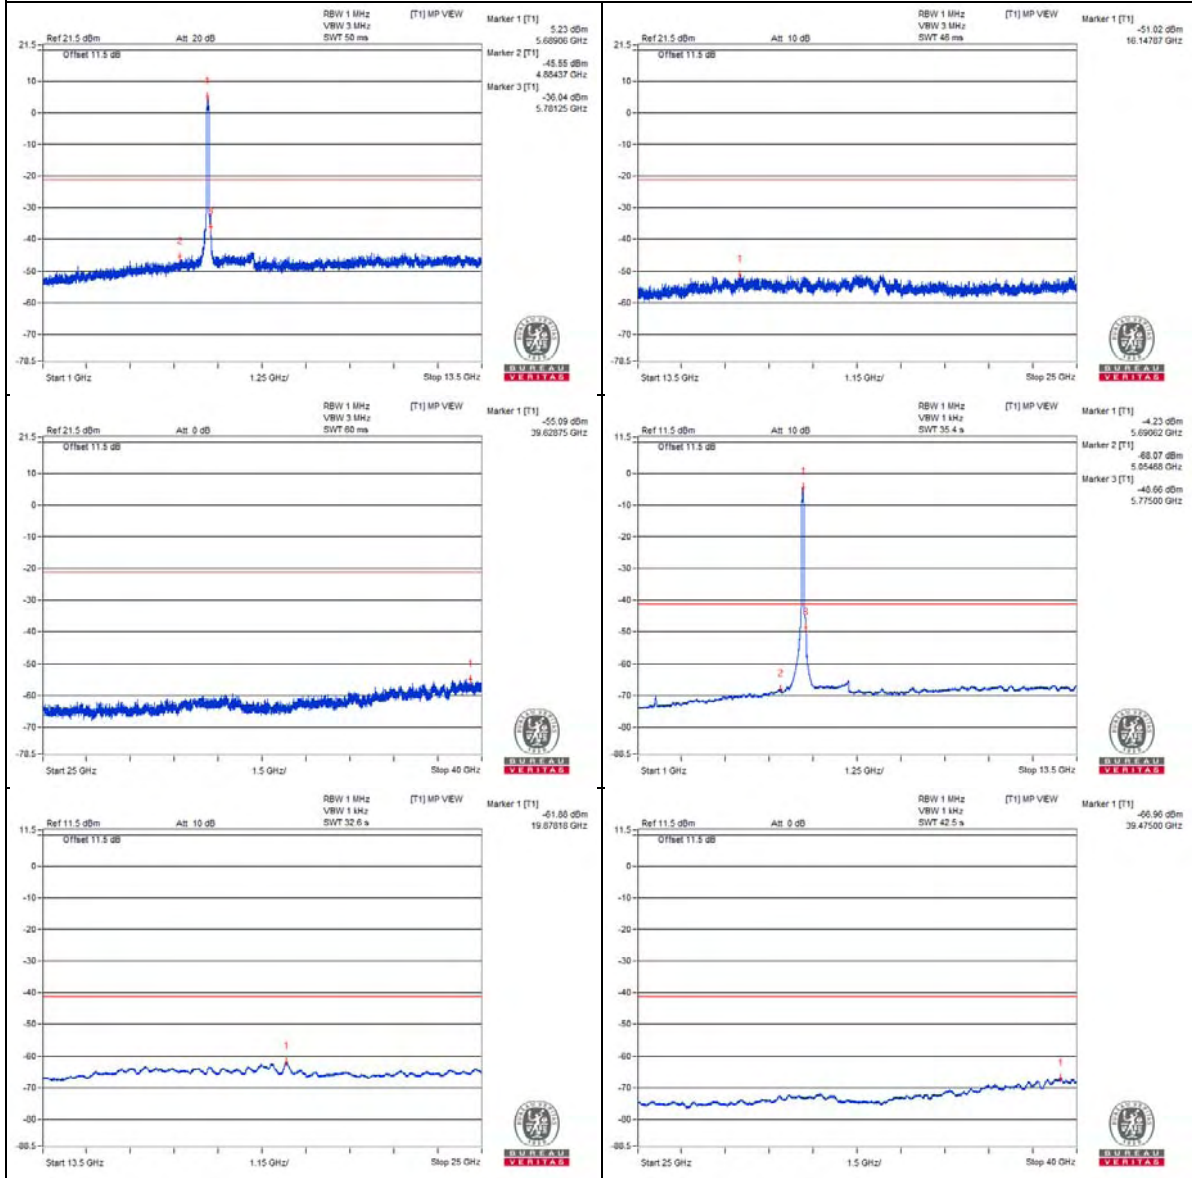

Chain 1

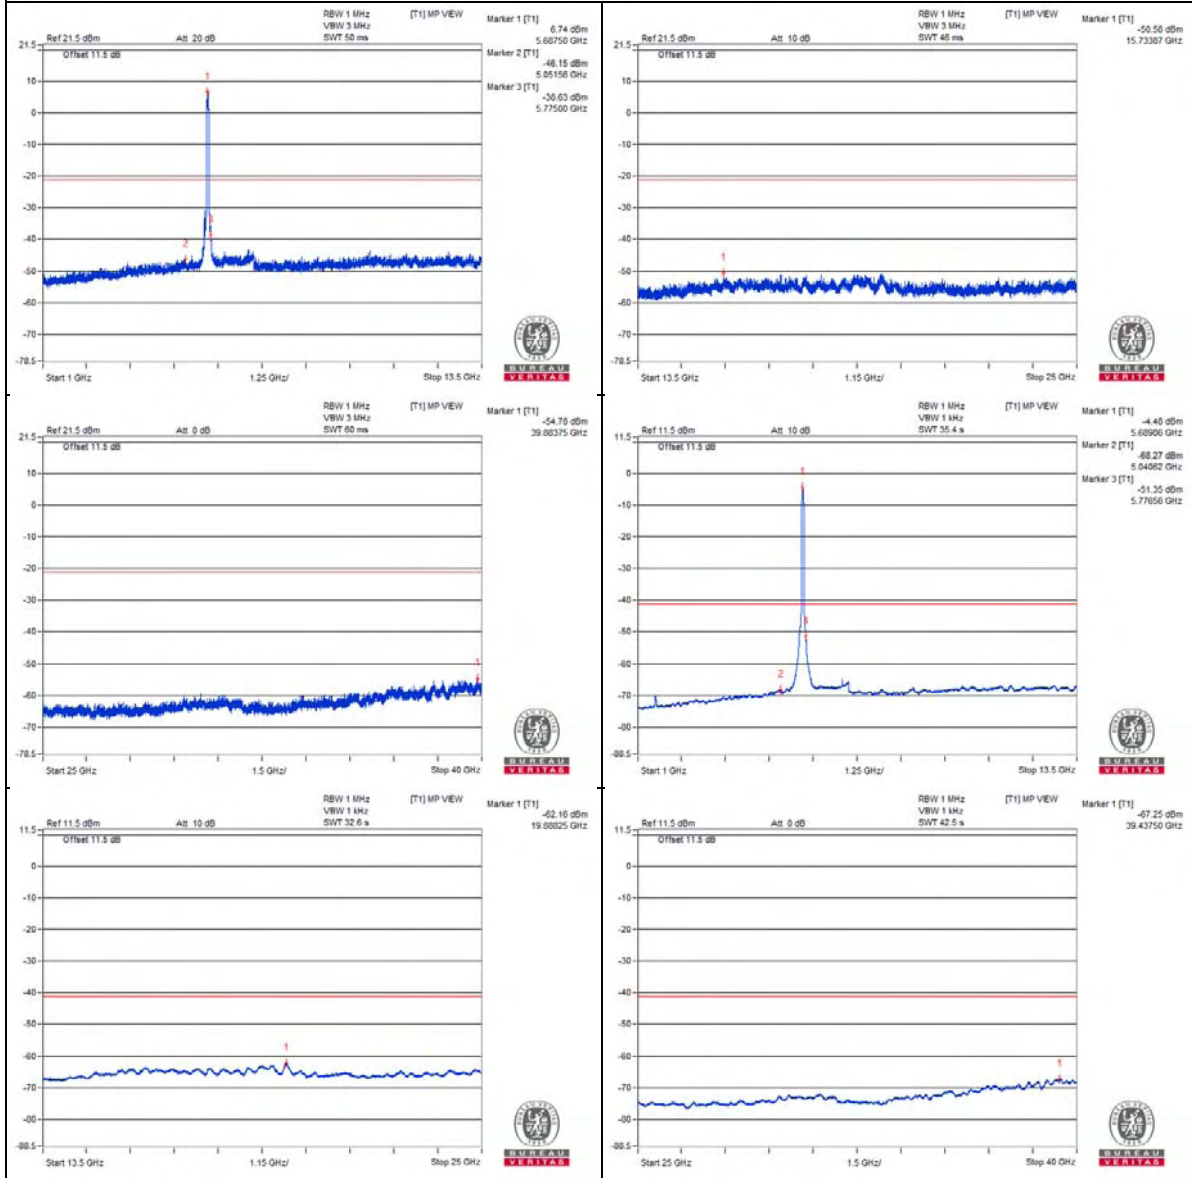

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5850.92 PK	62.02	68.2	-6.18	-45.04	-43.28	7.82	-33.24

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

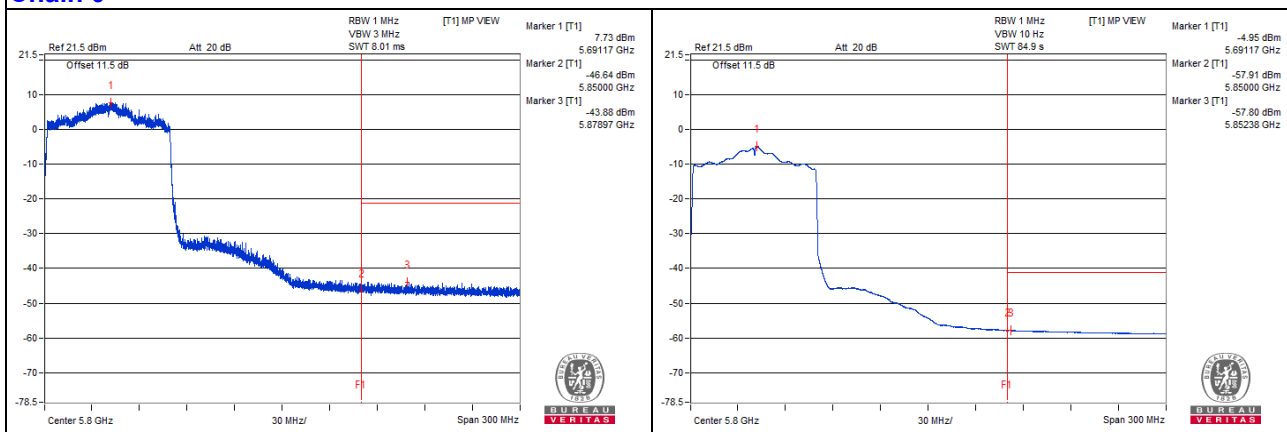

Chain 1

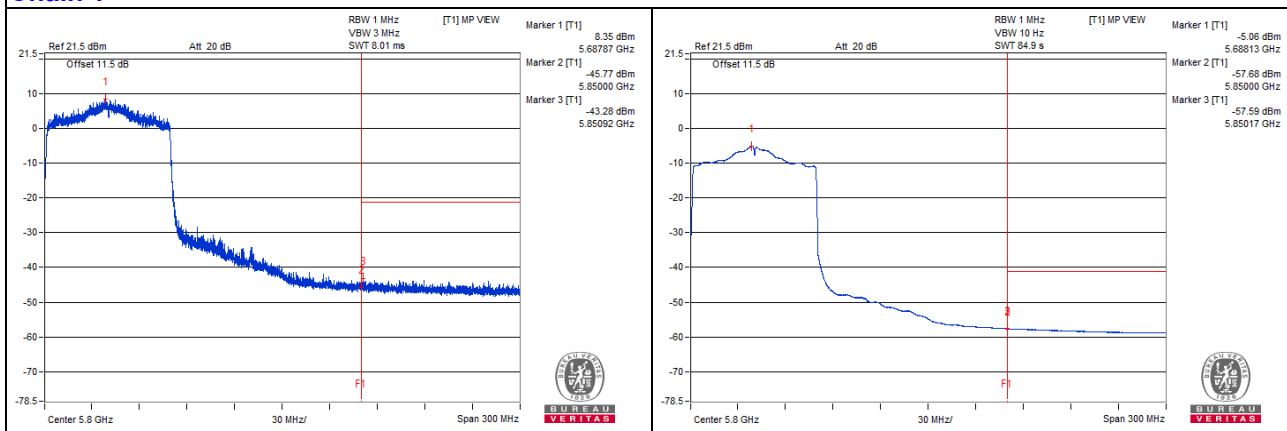

802.11ax (HE80) – Channel 155

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3850 PK	57.42	74	-16.58	-49.23	-48.82	8.17	-37.84
2	3832.81 AV	35.84	54	-18.16	-70.51	-70.7	8.17	-59.42
3	7717.18 PK	58.39	74	-15.61	-47.72	-48.41	8.17	-36.87
4	7682.81 AV	36.83	54	-17.17	-69.66	-69.56	8.17	-58.43
5	11534.37 PK	60.59	74	-13.41	-44.79	-47.26	8.17	-34.67
6	11568.75 AV	38.63	54	-15.37	-68.06	-67.57	8.17	-56.63
7	17320.87 PK	52.22	68.2	-15.98	-54.98	-53.58	8.17	-43.04


Note :

1. Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8


d = measurement distance in 3 meters.

2. # : Non-restricted frequency, no limit for average emission.

Chain 0

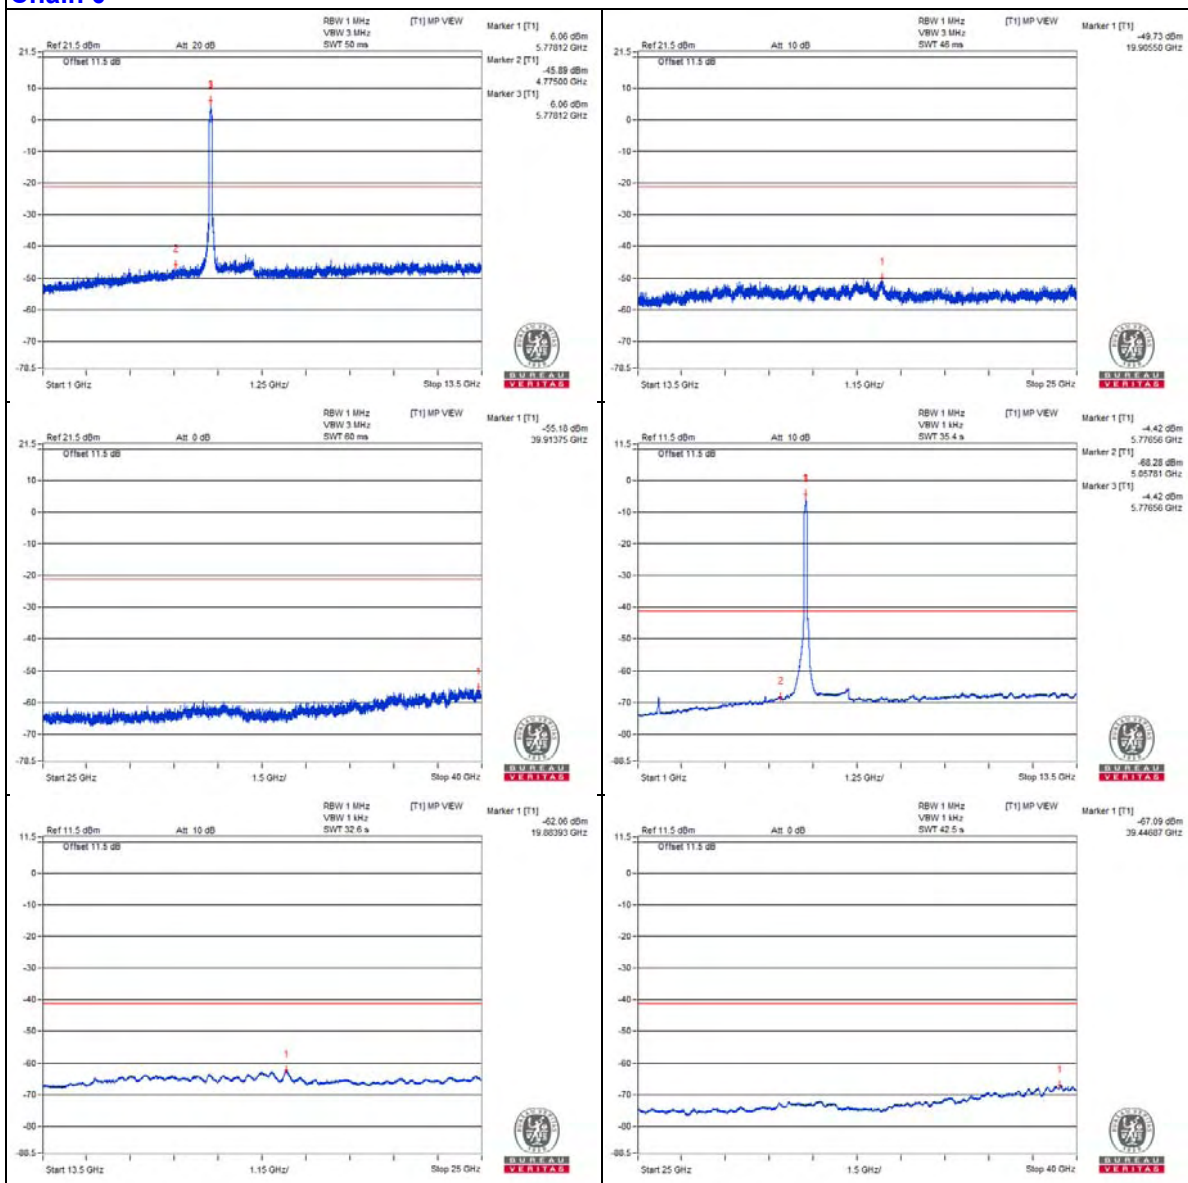


Chain 1

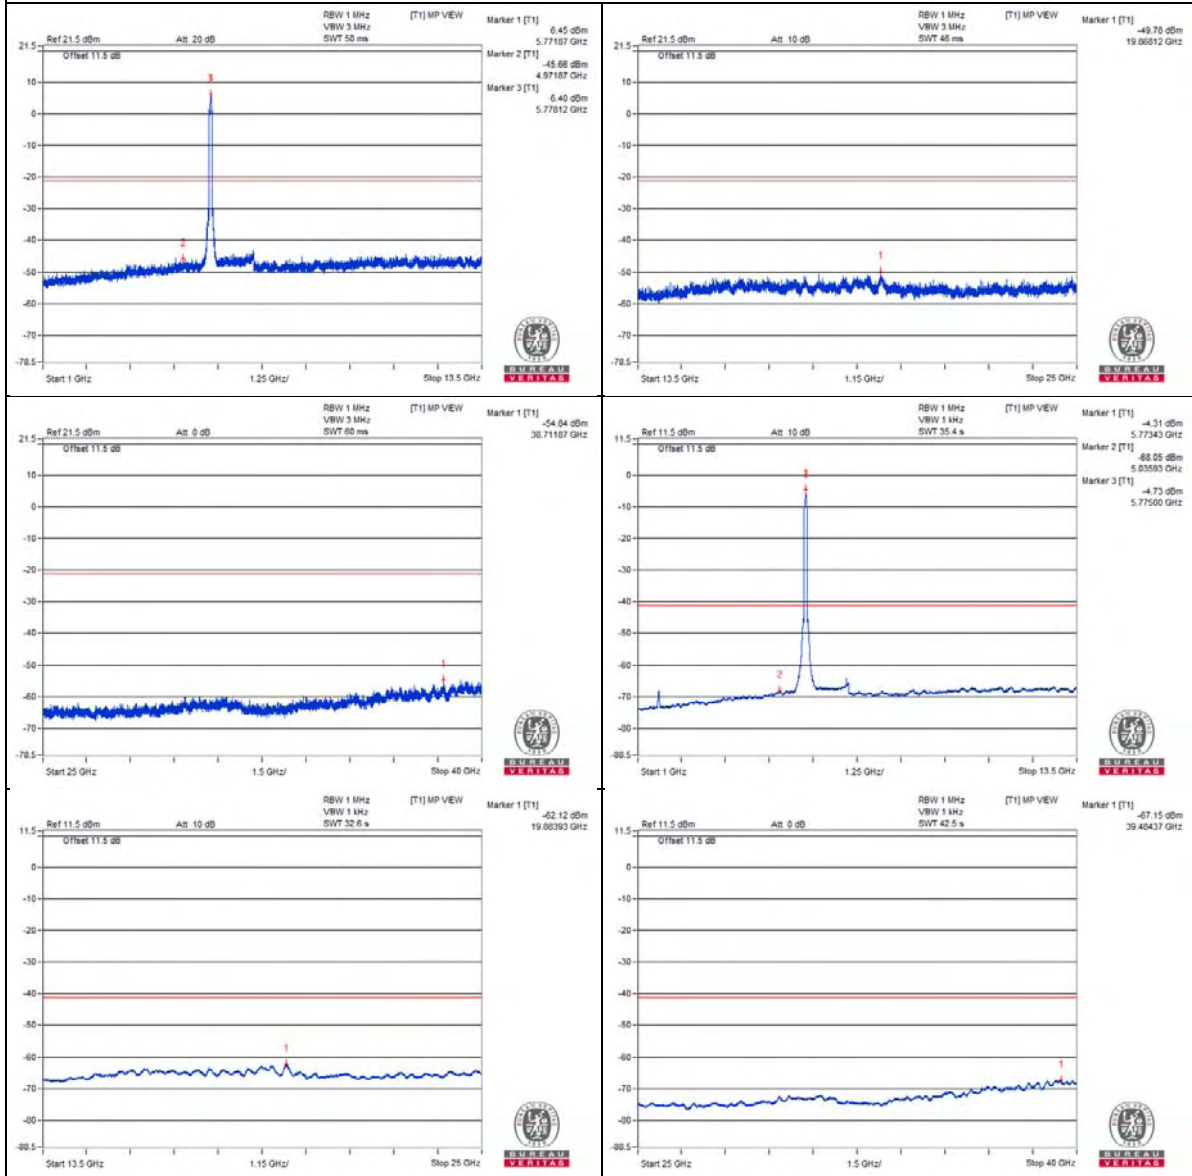


Bandedge table

Chain 0

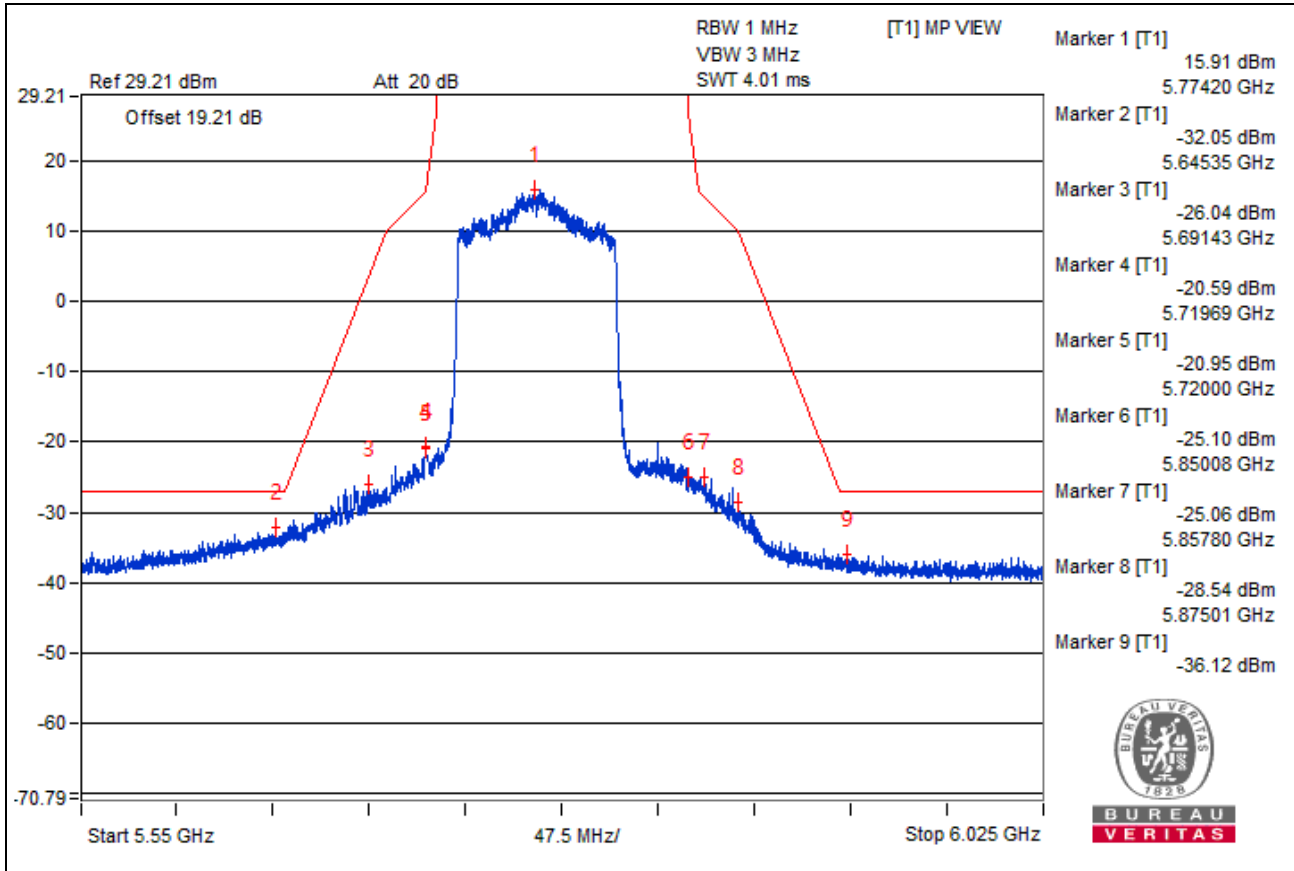

Chain 1

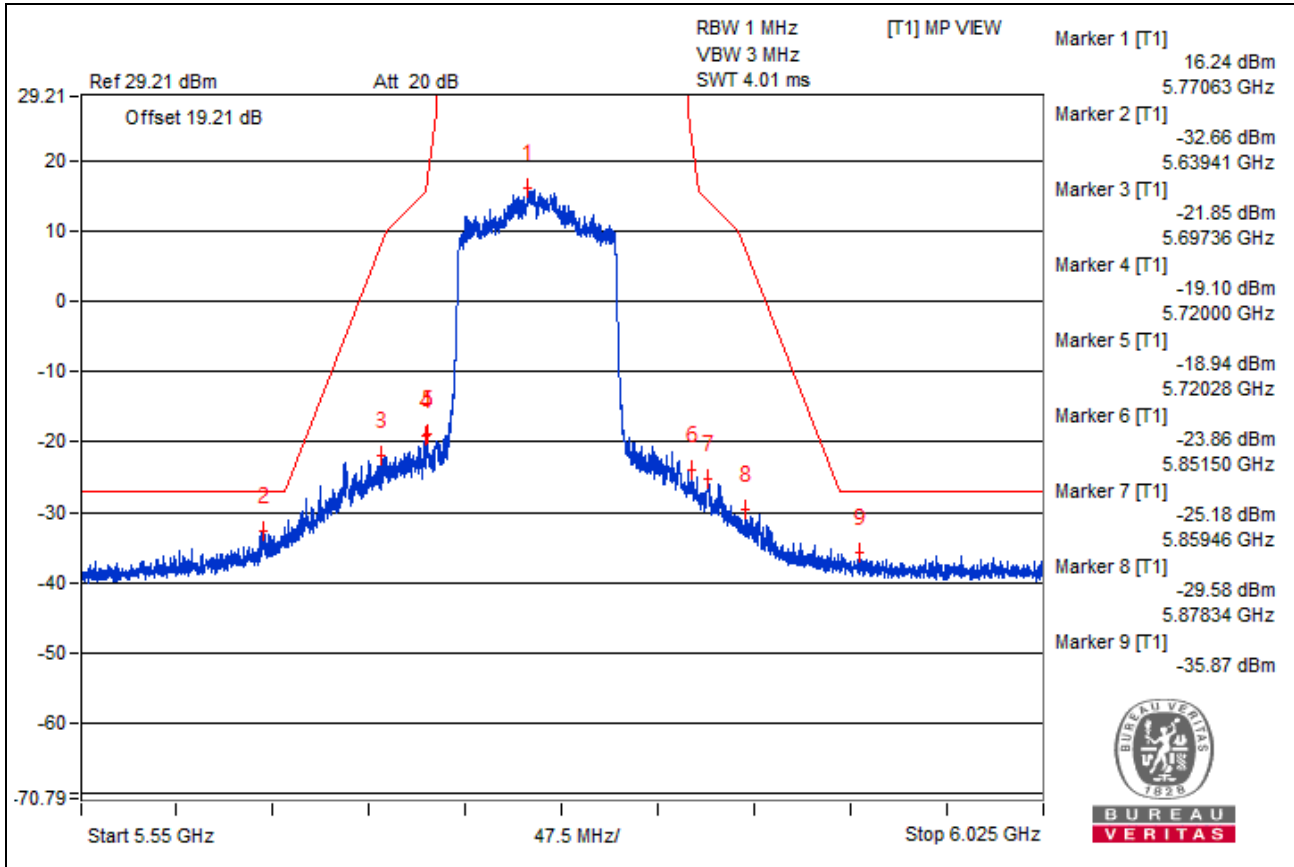

802.11ax (HE160) – Channel 50

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3518.75 PK	57.11	74	-16.89	-49.82	-48.89	8.17	-38.15
2	3510.93 AV	35.61	54	-18.39	-70.7	-70.97	8.17	-59.65
3	6981.25 PK	62.11	68.2	-6.09	-43.64	-45.16	8.17	-33.15
4	10498.43 PK	60.71	68.2	-7.49	-47.29	-44.59	8.17	-34.55
5	15749.68 PK	53.48	74	-20.52	-54.4	-51.88	8.17	-41.78
6	15762.62 AV	42.45	54	-11.55	-64.24	-63.76	8.17	-52.81


Note :

1. Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8


d = measurement distance in 3 meters.

2. # : Non-restricted frequency, no limit for average emission.

Chain 0

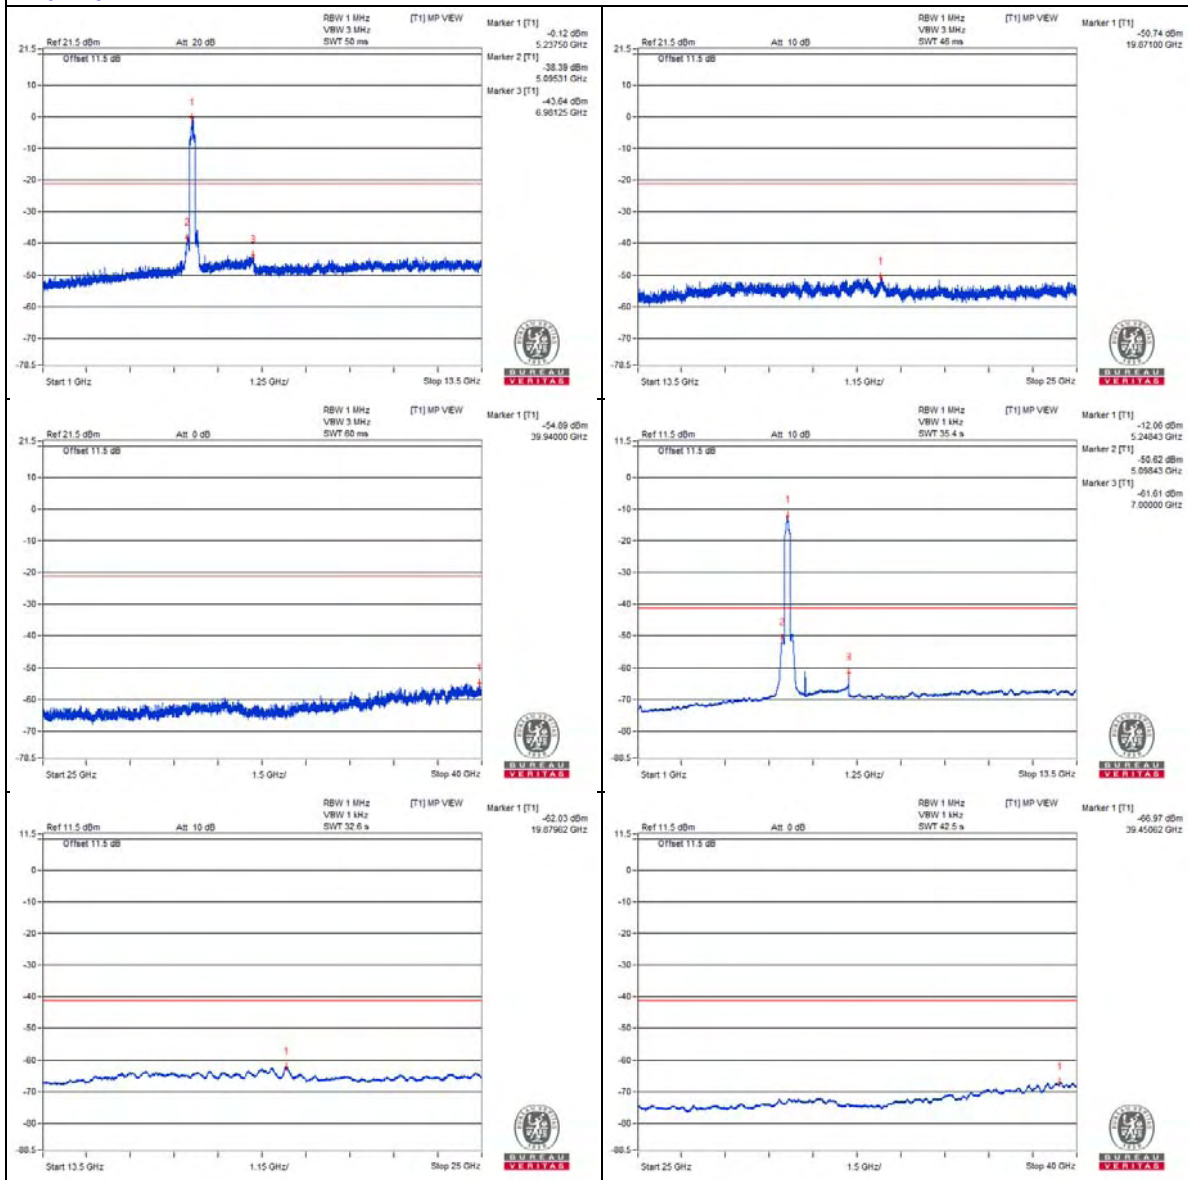

Chain 1

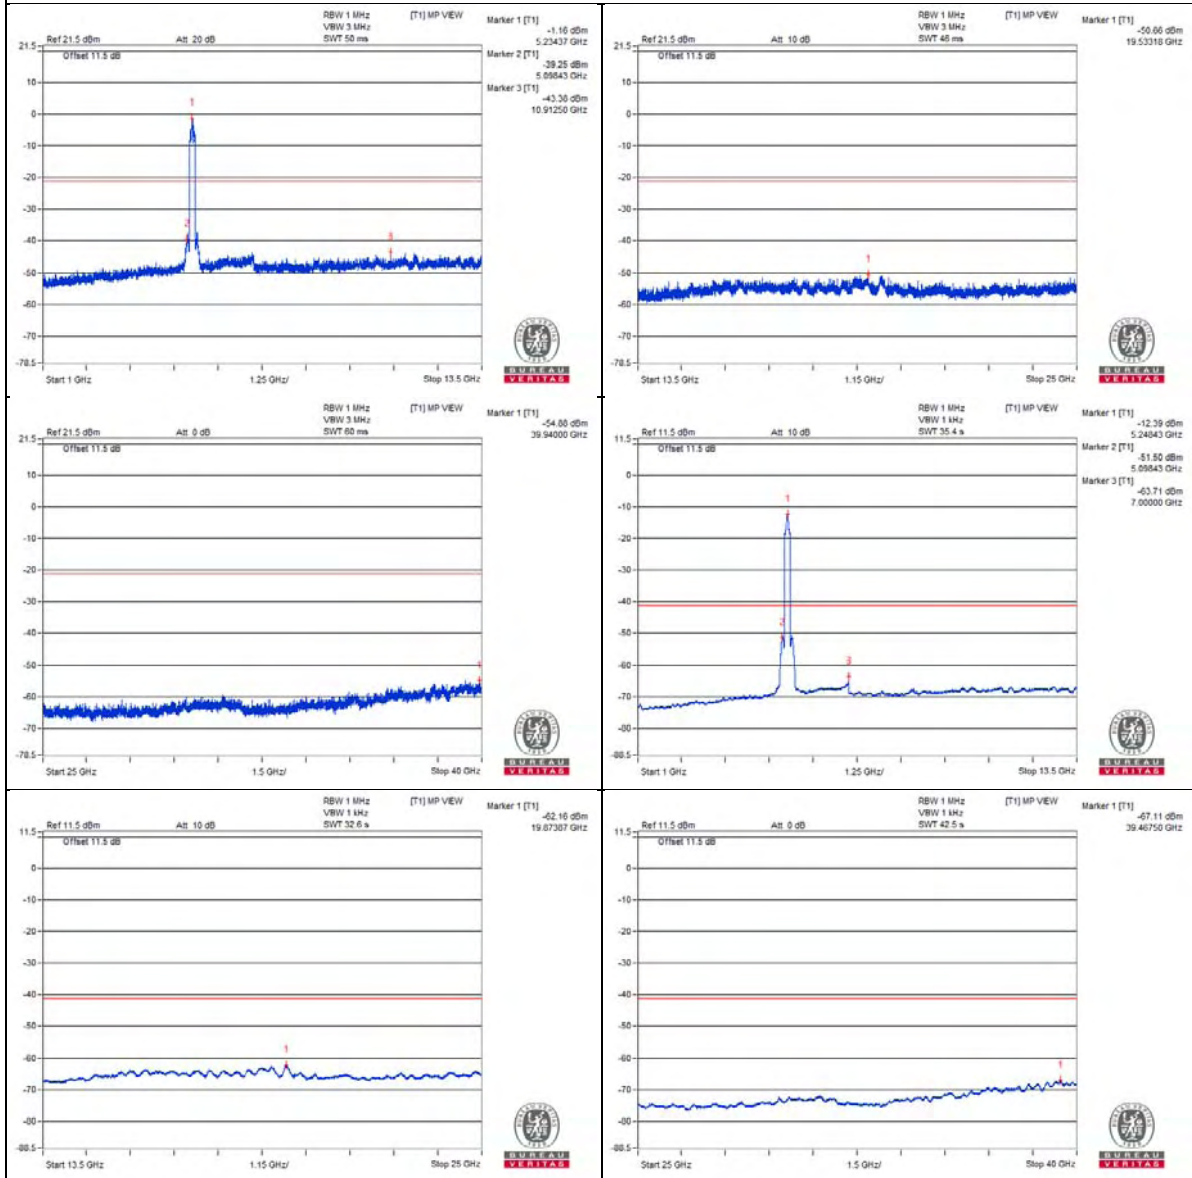

Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5148.8 PK	77.04	74	*3.04	-28.25	-27.14	6.43	-18.22
2	5148.77 AV	62.69	54	*8.69	-42.41	-41.65	6.43	-32.57

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.


* : The unwanted emission was verified and the test result was passed by radiated measurement.

(Please refer APPENDIX B)

Chain 0

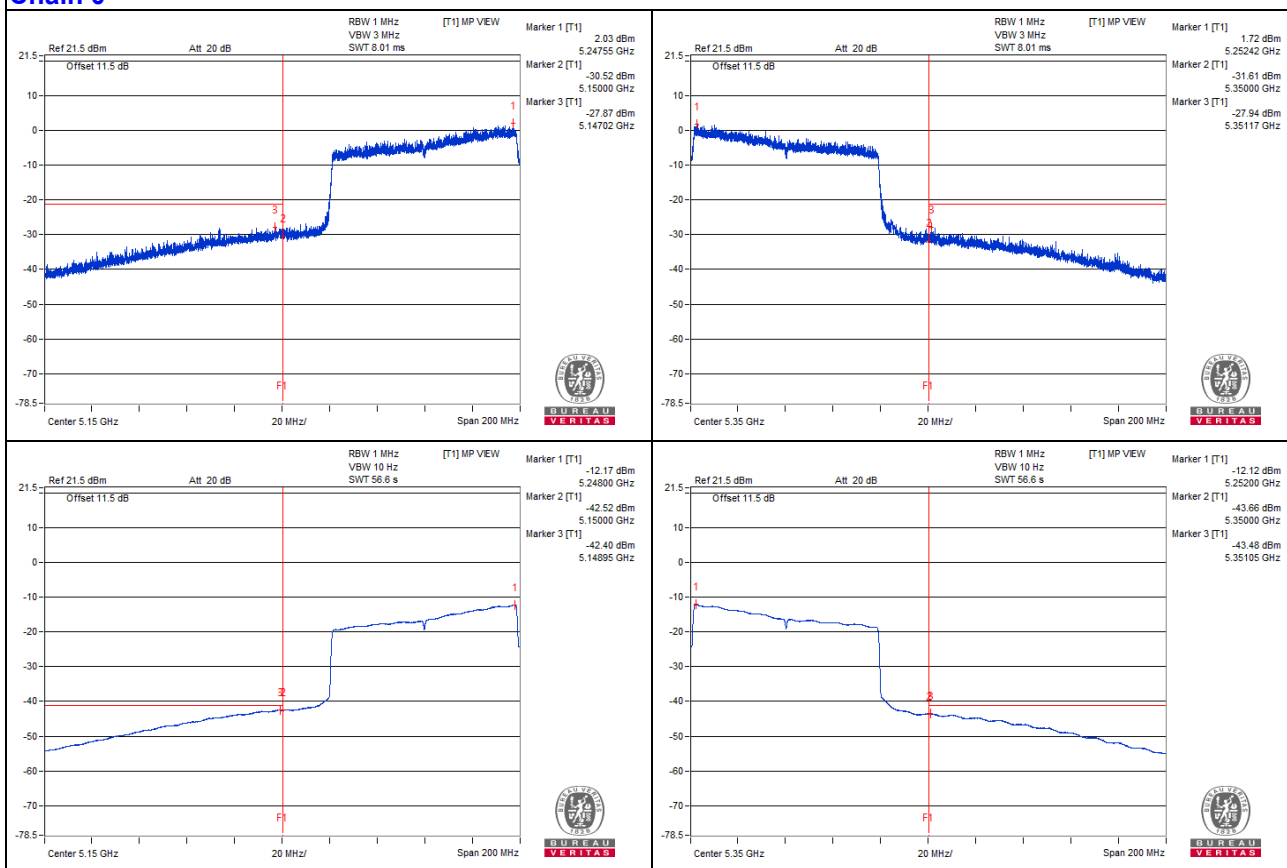

Chain 1

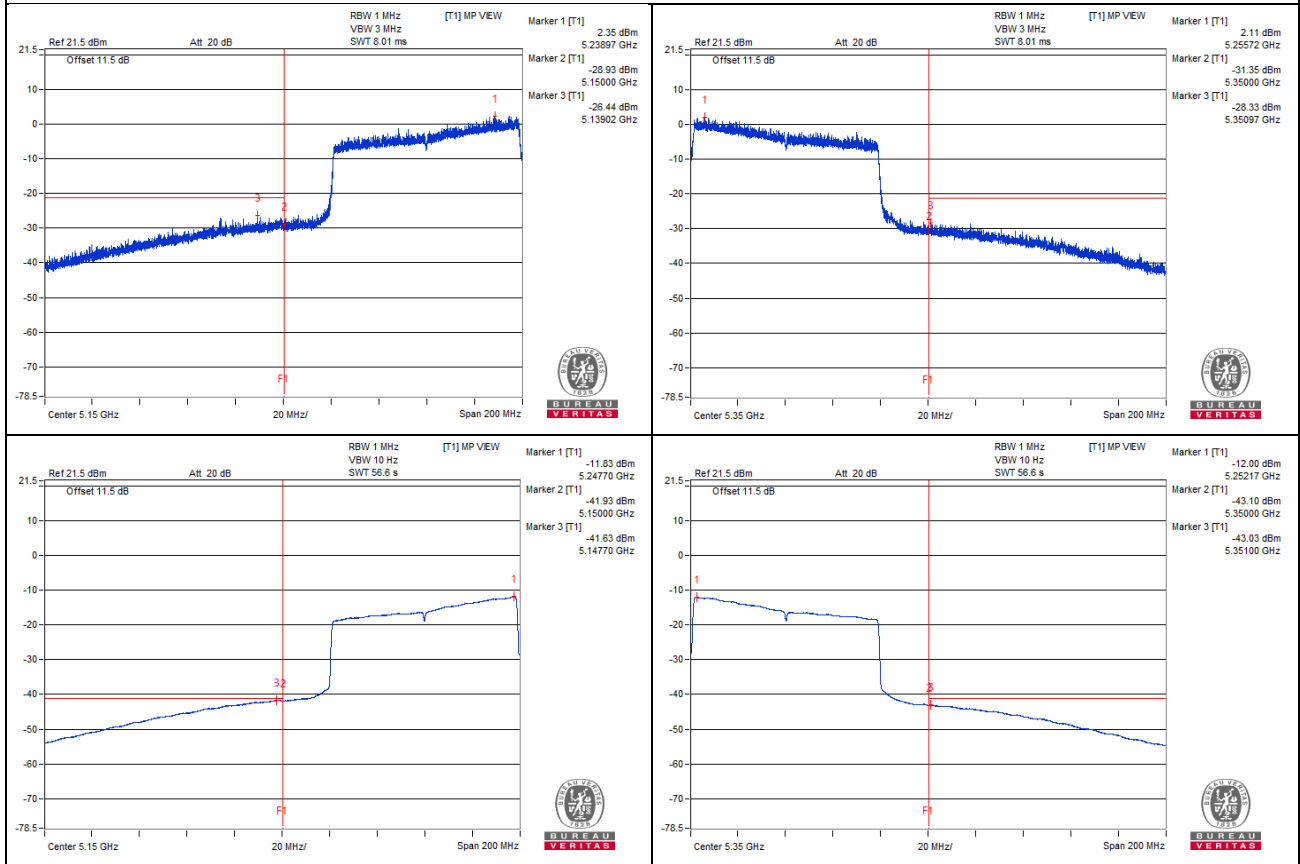

802.11ax (HE160) – Channel 114

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3709.37 PK	57.79	74	-16.21	-47.37	-50.47	8.17	-37.47
2	3718.75 AV	36.01	54	-17.99	-70.15	-70.73	8.17	-59.25
3	7429.68 PK	59.27	74	-14.73	-46.61	-47.81	8.17	-35.99
4	7418.75 AV	37.26	54	-16.74	-69.21	-69.16	8.17	-58
5	11159.37 PK	60.42	74	-13.58	-46.19	-45.86	8.17	-34.84
6	11157.81 AV	38.78	54	-15.22	-67.7	-67.62	8.17	-56.48
7	16707.06 PK	52.32	68.2	-15.88	-53.85	-54.41	8.17	-42.94


Note :

1. Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8


d = measurement distance in 3 meters.

2. # : Non-restricted frequency, no limit for average emission.

Chain 0

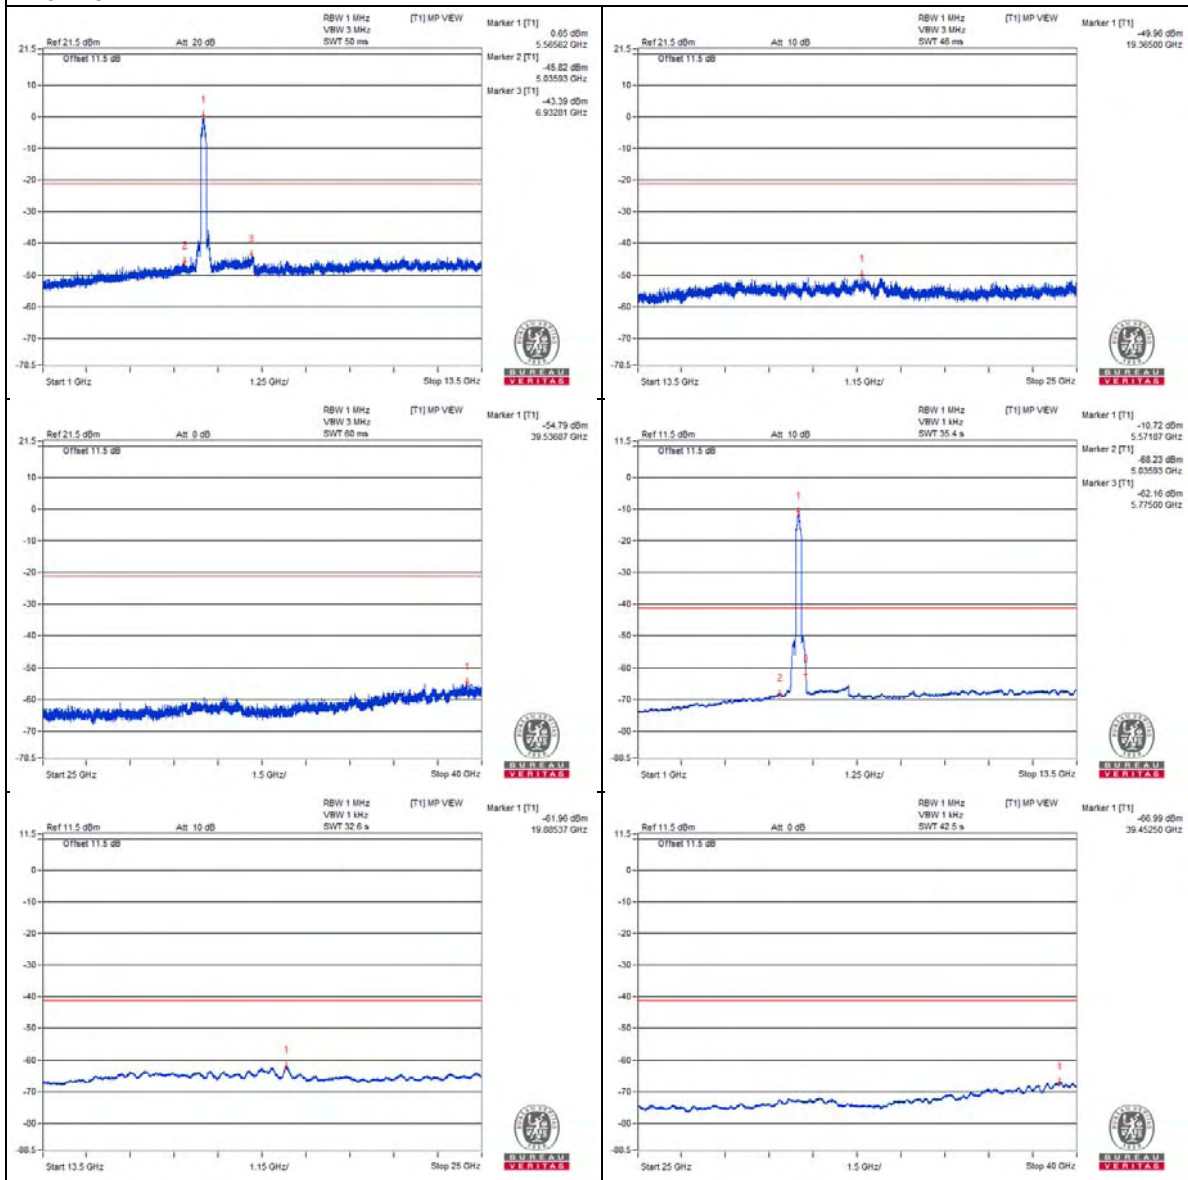

Chain 1

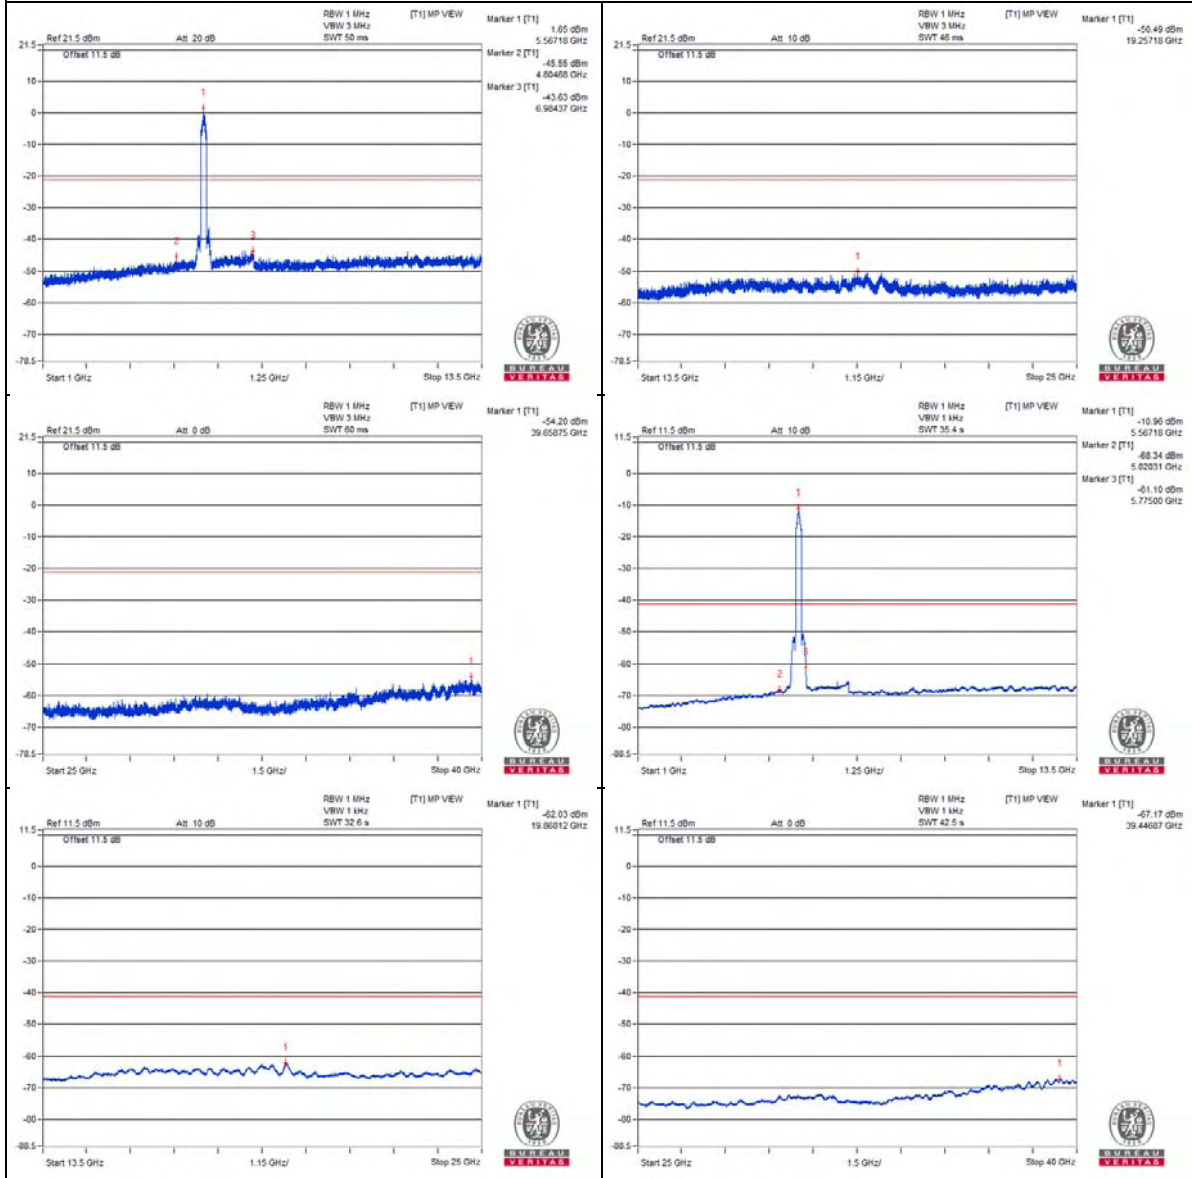

Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5468.84 PK	77.32	68.2	*9.12	-29.27	-28.33	7.82	-17.94


Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8


d = measurement distance in 3 meters.

* : The unwanted emission was verified and the test result was passed by radiated measurement.
(Please refer APPENDIX B)

Chain 0

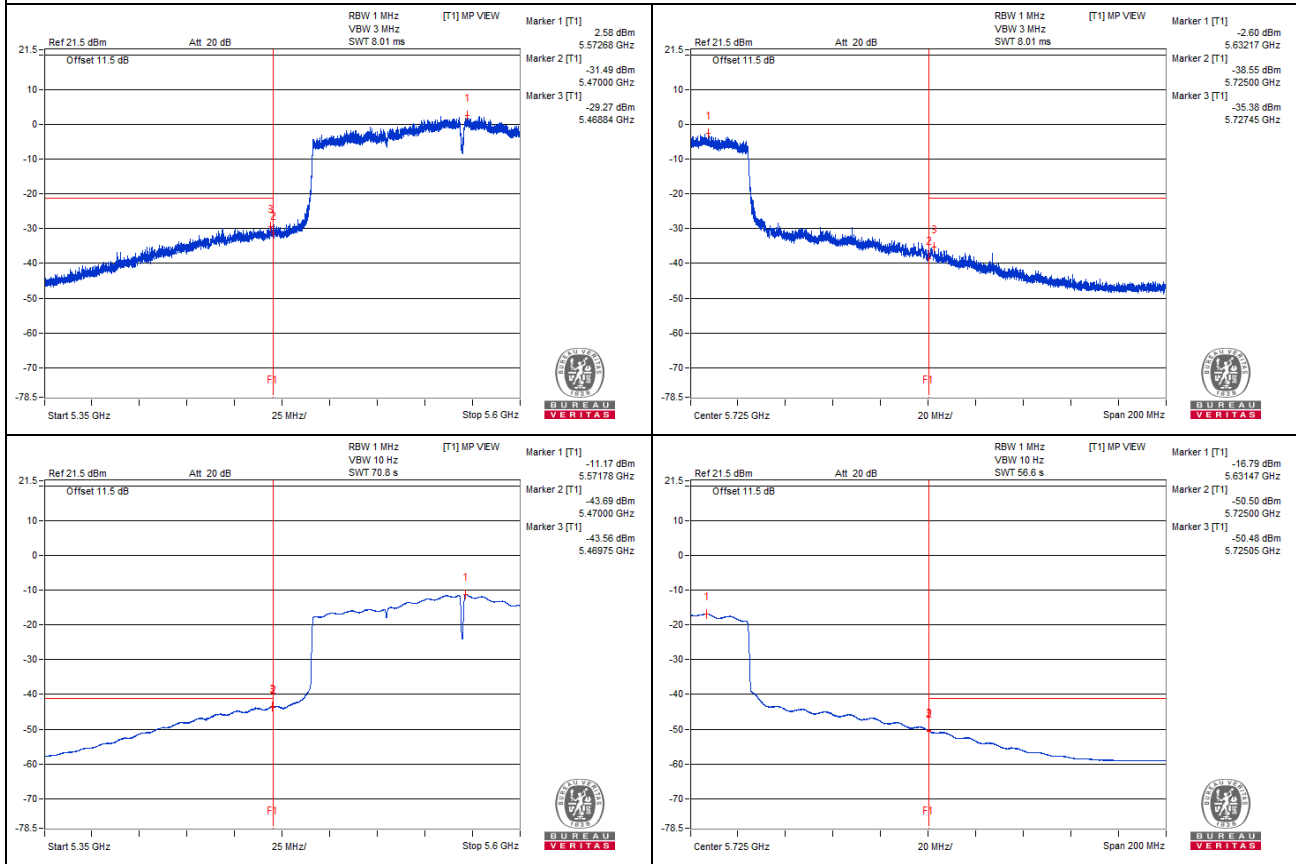

Chain 1

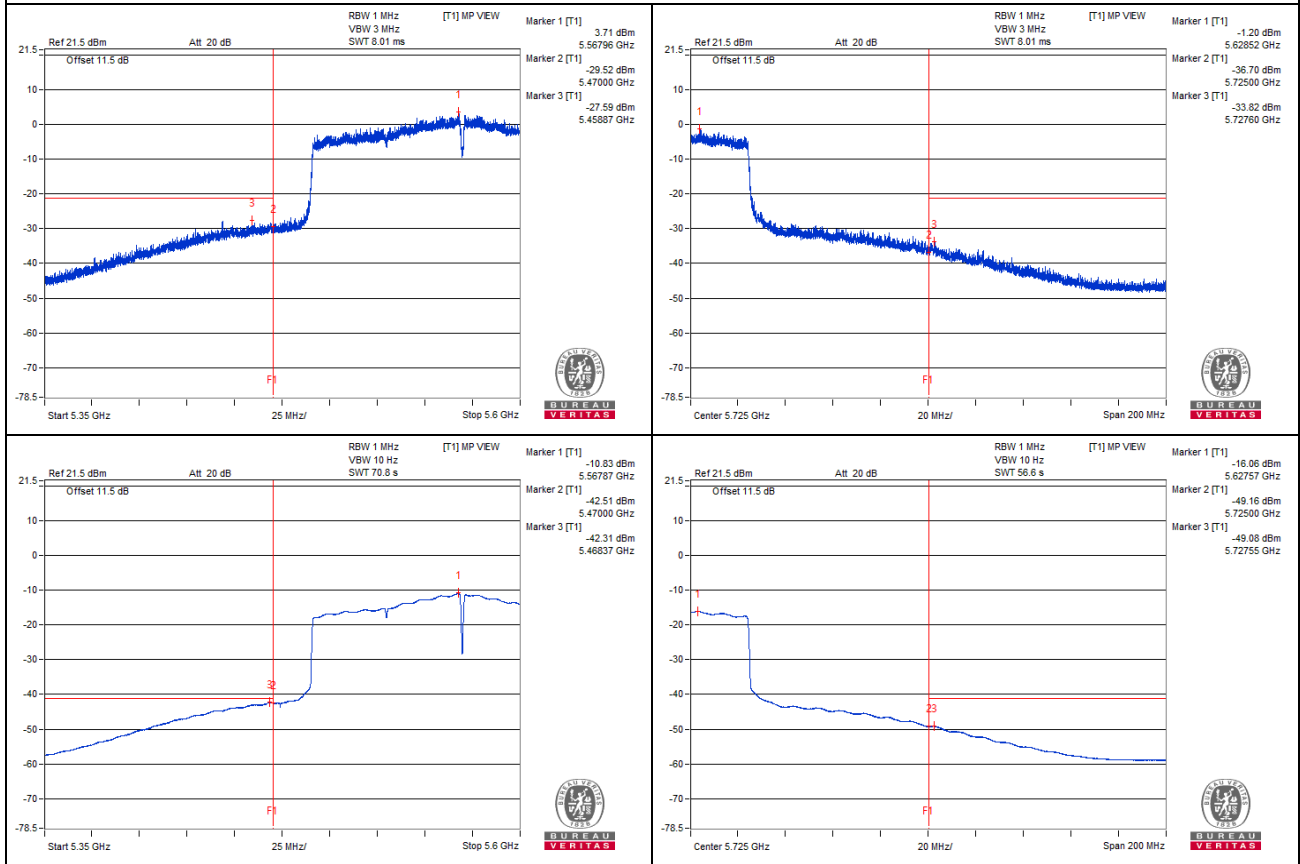

Below 1GHz Data:

802.11a – Channel 116

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain 0	Chain 1		
1	67.34	29.52	40	-10.48	-75.75	-78.53	8.17	-65.74
2	215.02	30.43	43.5	-13.07	-77.18	-75.09	8.17	-64.83
3	240.73	30.74	46	-15.26	-76.67	-74.91	8.17	-64.52
4	575.62	31.14	46	-14.86	-73.76	-77.7	8.17	-64.12
5	775.68	31.93	46	-14.07	-72.99	-76.87	8.17	-63.33
6	982.78	31.72	54	-22.28	-76.84	-73.3	8.17	-63.54

Note :


Emission Level (dBUV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

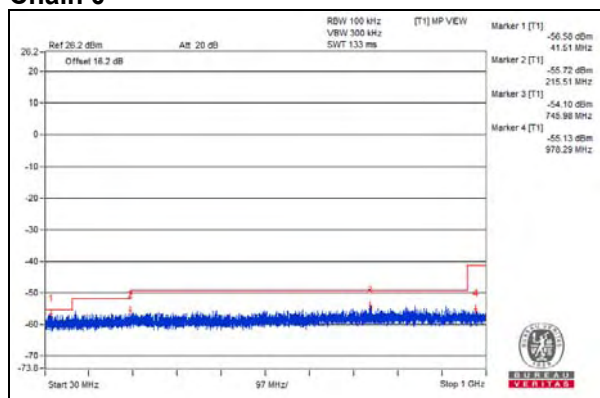

Chain 1

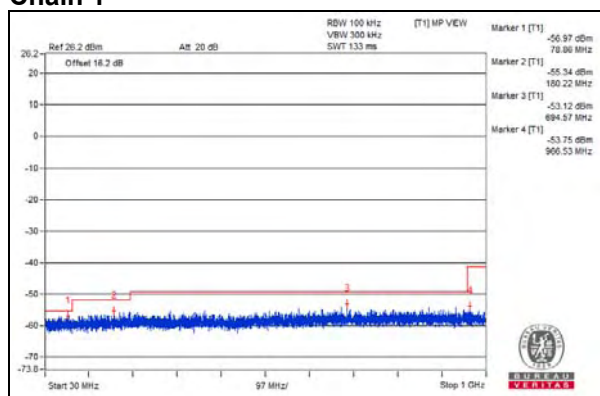

20MHz Preamble

RU26

Channel 36


Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	1001.56 PK	43.84	74	-30.16	-61.62	-63.88	8.17	-51.42
2	1009.37 AV	32.48	54	-21.52	-73.8	-74.12	8.17	-62.78
3	6906.25 PK	54.69	68.2	-13.51	-50.24	-54.1	8.17	-40.57
4	10356.25 PK	49.39	68.2	-18.81	-57.02	-57.08	8.17	-45.87
5	15544.12 PK	52.37	74	-21.63	-54	-54.15	8.17	-42.89
6	15542.68 AV	41.9	54	-12.1	-64.56	-64.52	8.17	-53.36


Note :

1. Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8
d = measurement distance in 3 meters.
2. # : Non-restricted frequency, no limit for average emission.

Chain 0

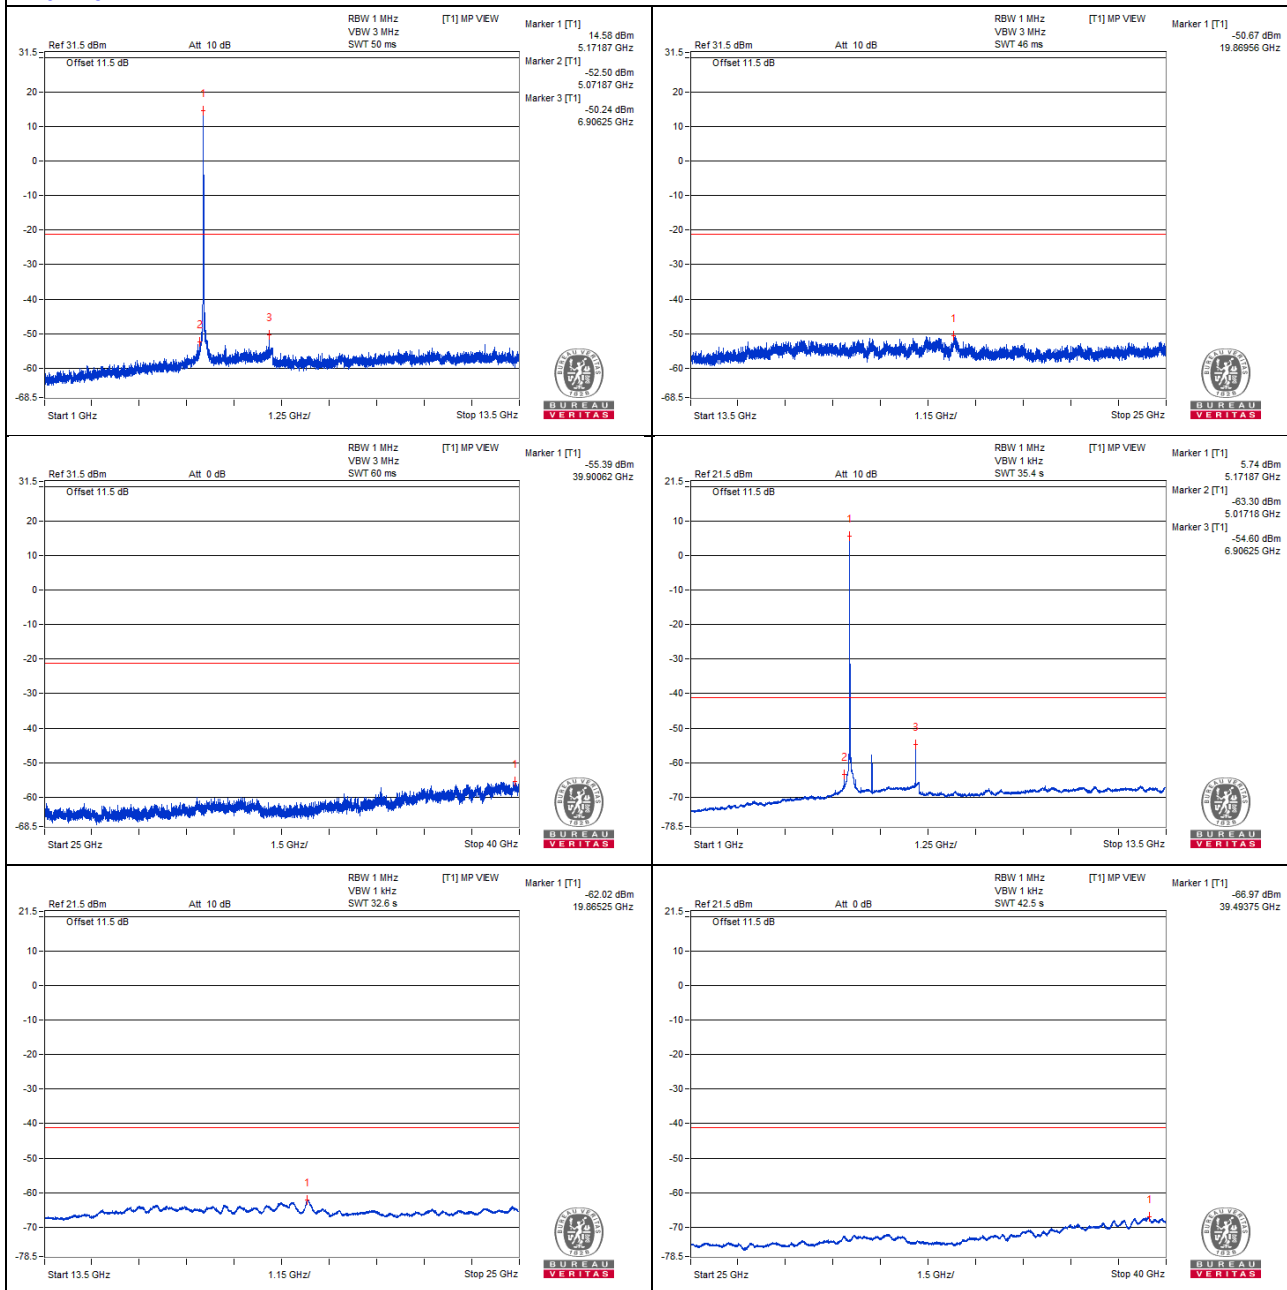

Chain 1

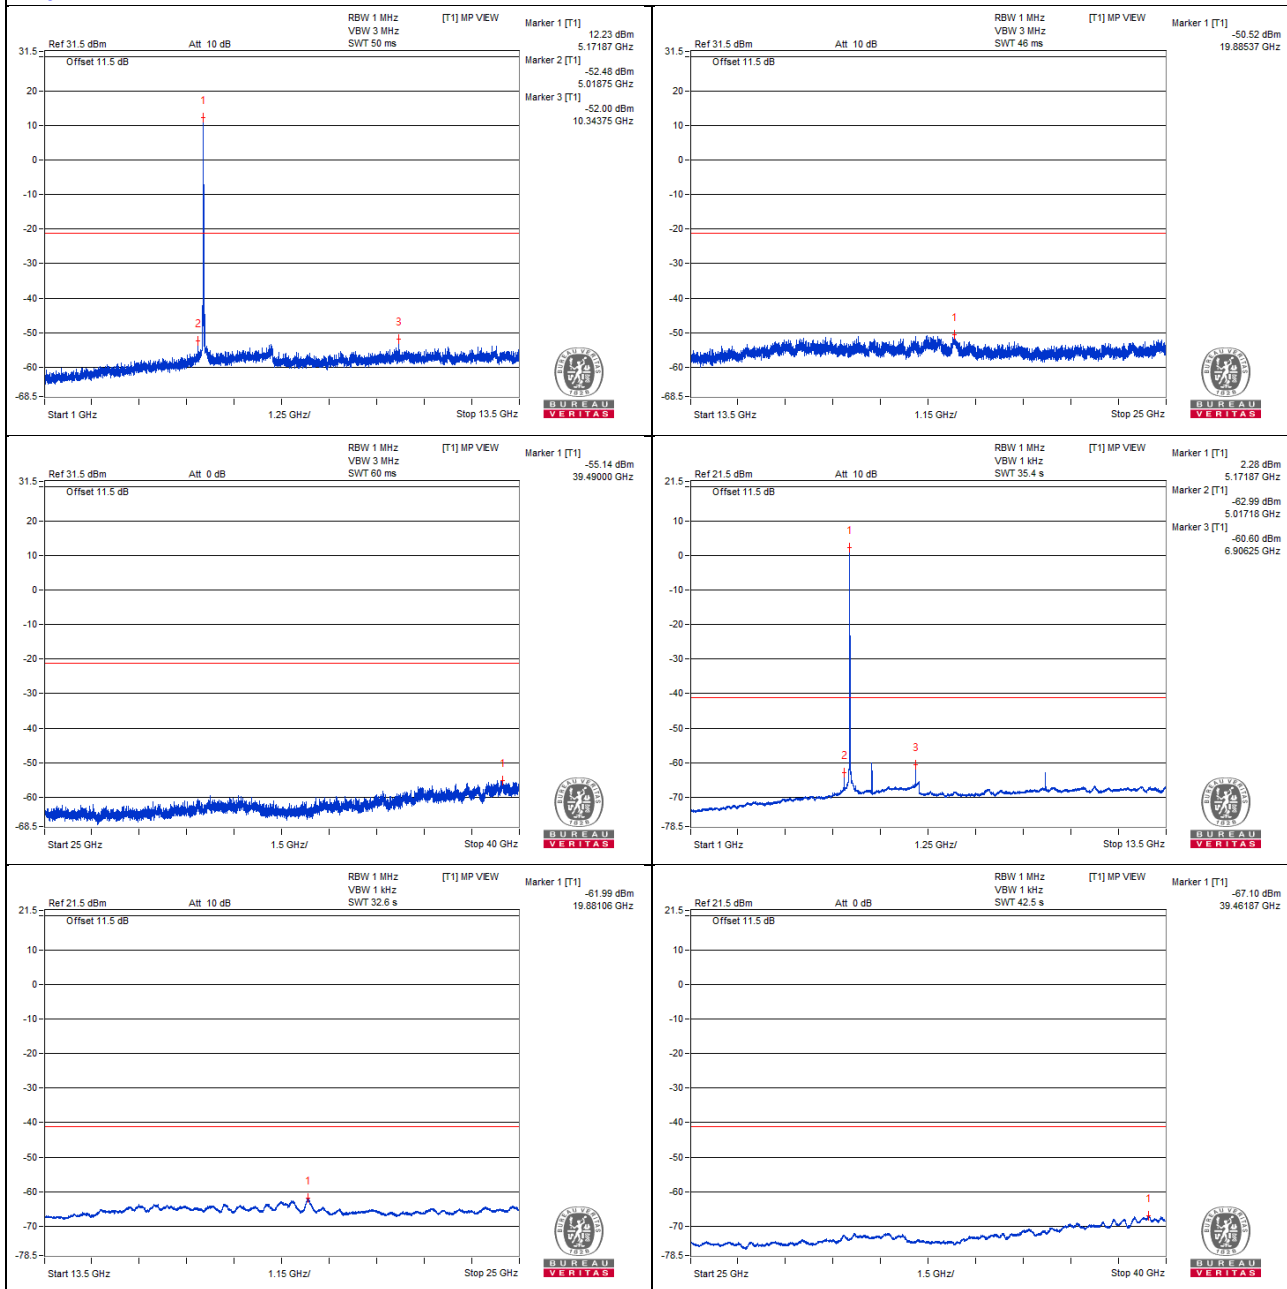

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5149.87 PK	65.58	74	-8.42	-37.78	-40.86	6.36	-29.68
2	5150 AV	41.13	54	-12.87	-62.14	-65.48	6.36	-54.13

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

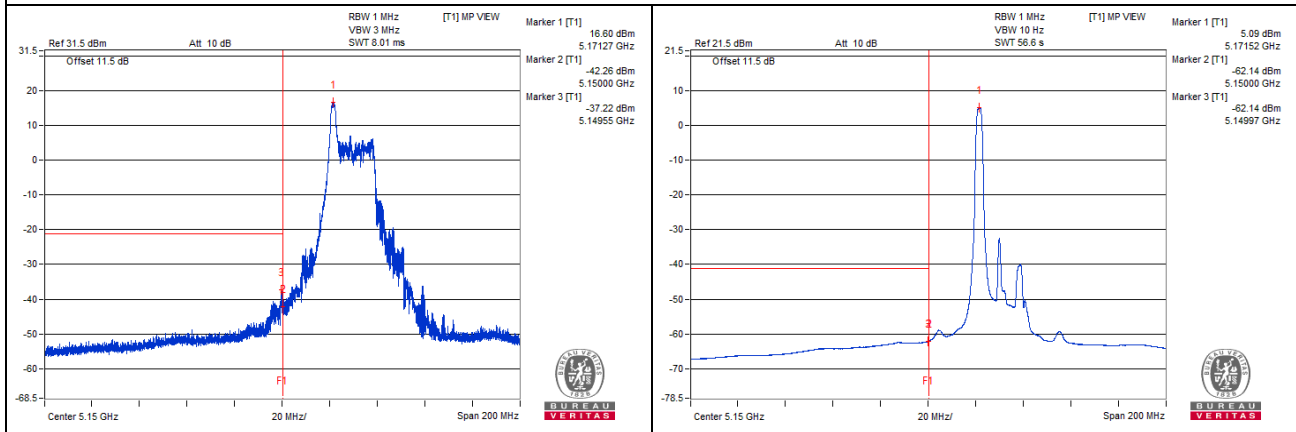

Chain 1

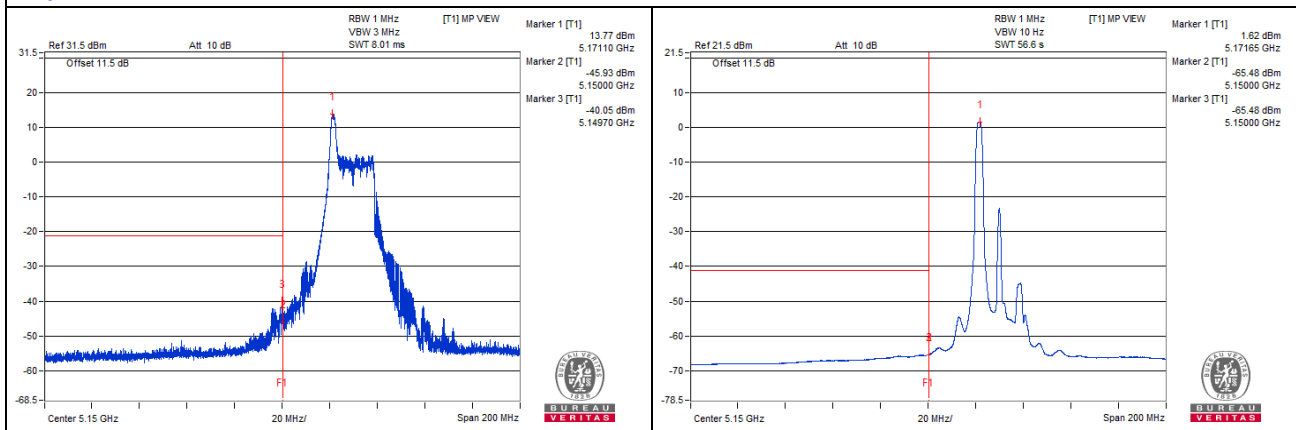

Channel 40

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	1000 PK	46.67	74	-27.33	-57.65	-64.1	8.17	-48.59
2	1000 AV	33.25	54	-20.75	-72.81	-73.61	8.17	-62.01
3	6932.81 PK	55.28	68.2	-12.92	-49.88	-52.97	8.17	-39.98
4	10401.56 PK	49.86	68.2	-18.34	-56.3	-56.87	8.17	-45.4
5	15600.18 PK	53.01	74	-20.99	-52.82	-54.15	8.17	-42.25
6	15600.18 AV	41.35	54	-12.65	-65.02	-65.17	8.17	-53.91

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

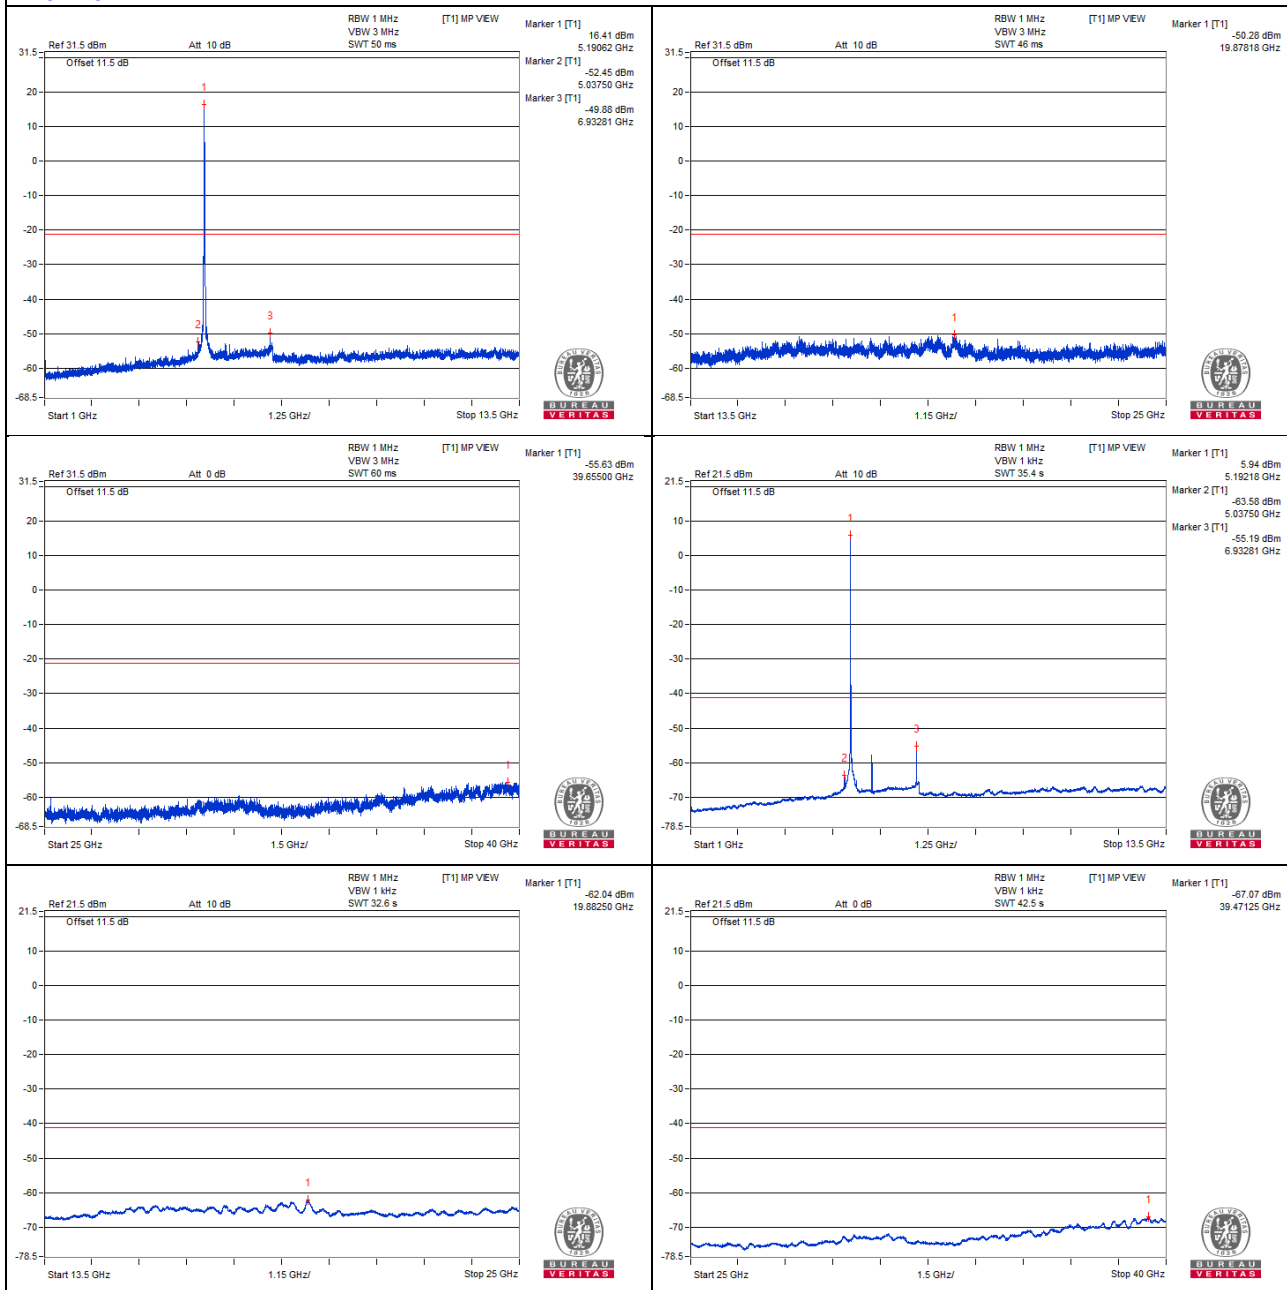

Chain 1

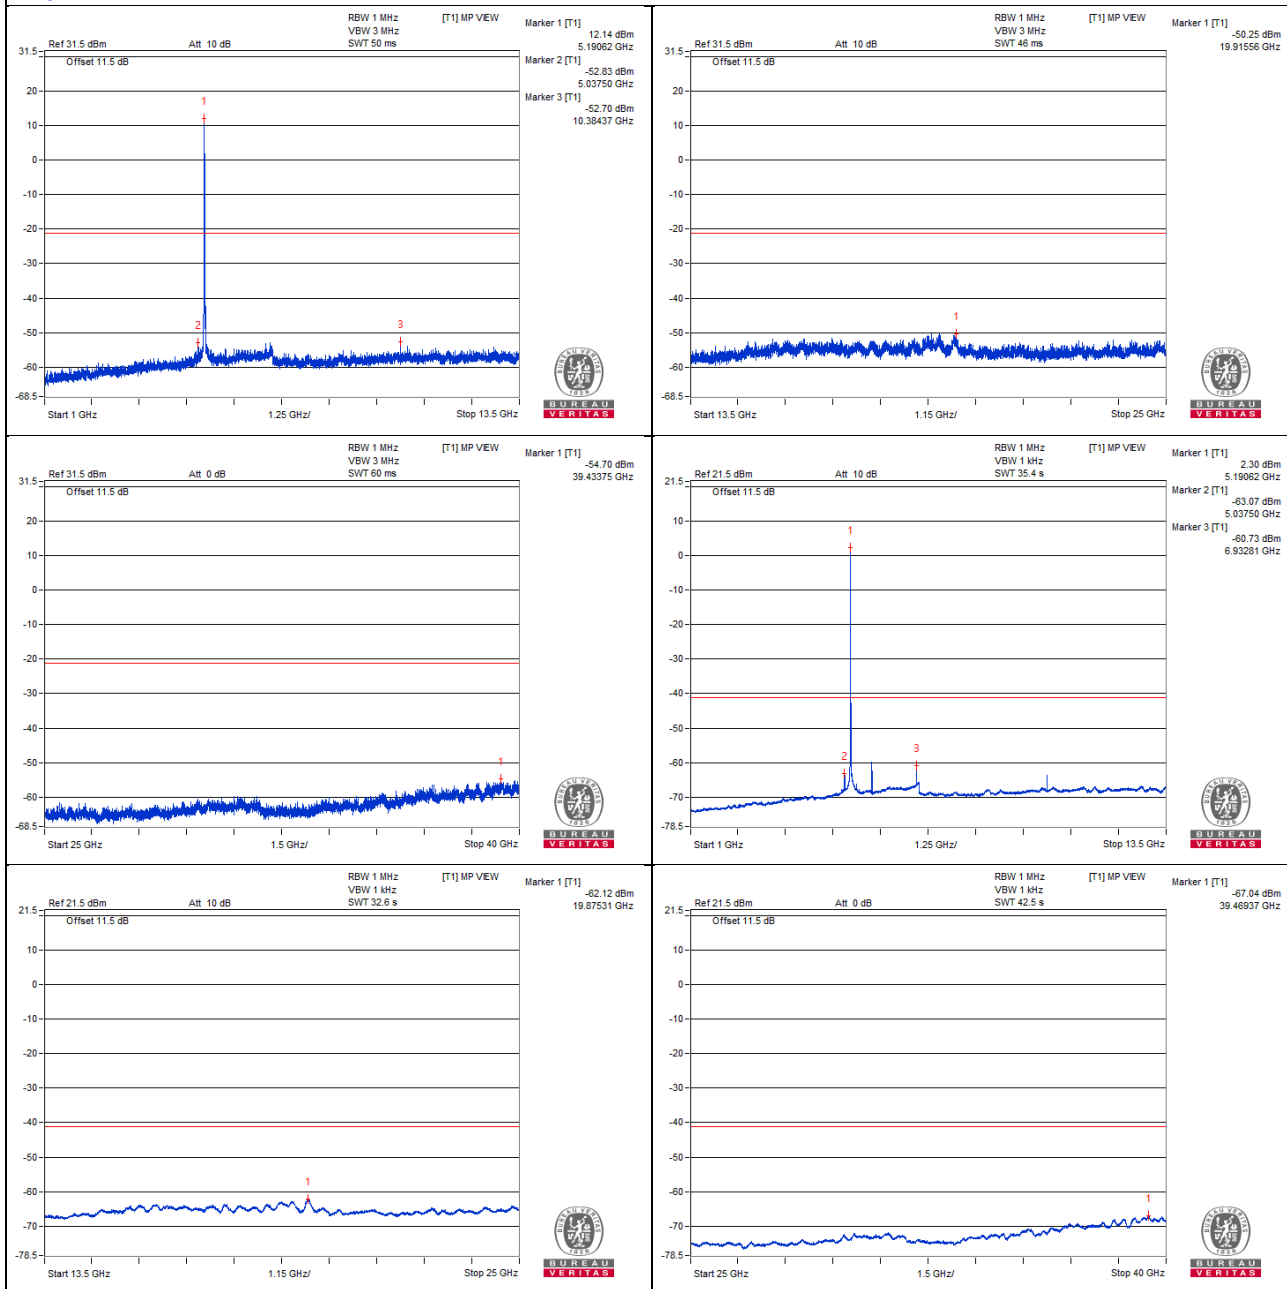

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5123 PK	57.5	74	-16.5	-51.37	-45.03	6.36	-37.76
2	5150 AV	40.07	54	-13.93	-63.23	-66.49	6.36	-55.19

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

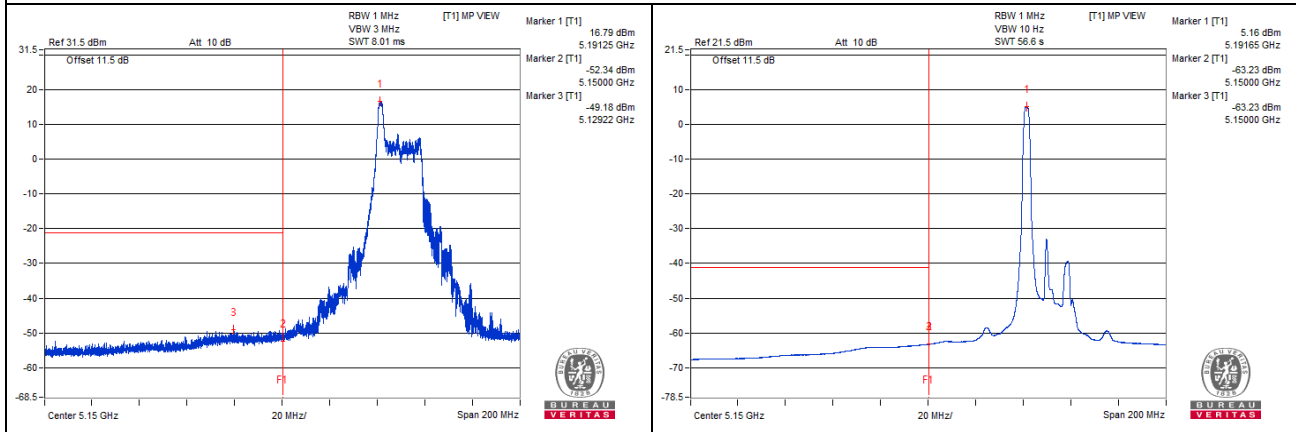

Chain 1

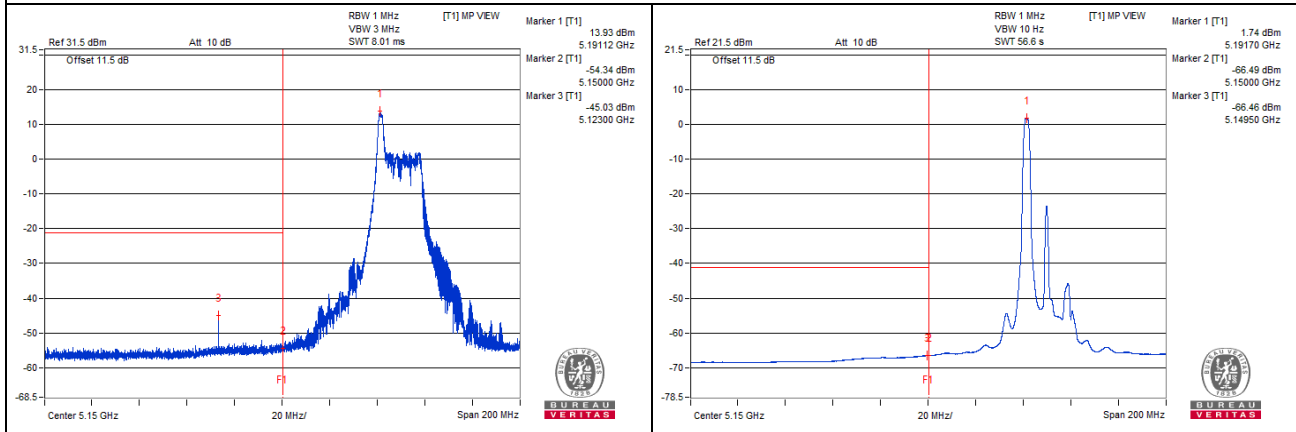

Channel 48

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	1043.75 PK	61.13	74	-12.87	-43.05	-50.3	8.17	-34.13
2	1042.18 AV	48.29	54	-5.71	-56.18	-61.87	8.17	-46.97
3	6985.93 PK	54.58	68.2	-13.62	-51.22	-52.62	8.17	-40.68
4	10478.12 PK	49.68	68.2	-18.52	-57.56	-56.08	8.17	-45.58
5	15720.93 PK	53.24	74	-20.76	-54.75	-52.06	8.17	-42.02
6	15723.81 AV	41.9	54	-12.1	-64.33	-64.76	8.17	-53.36

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

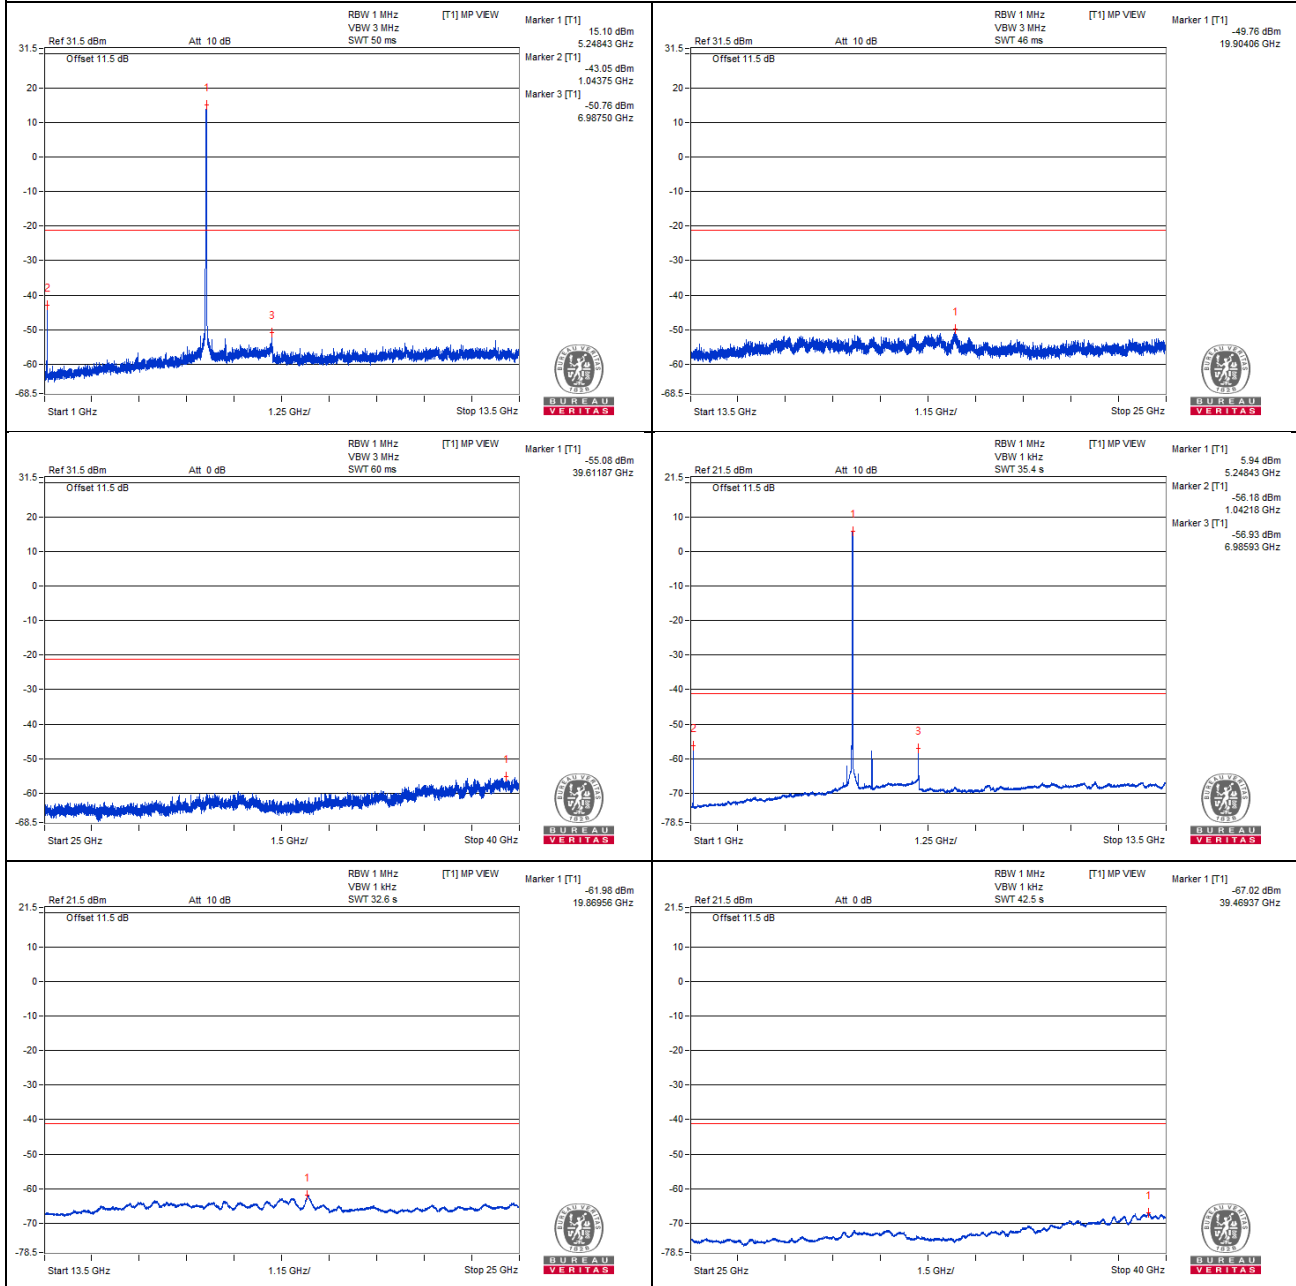

Chain 1

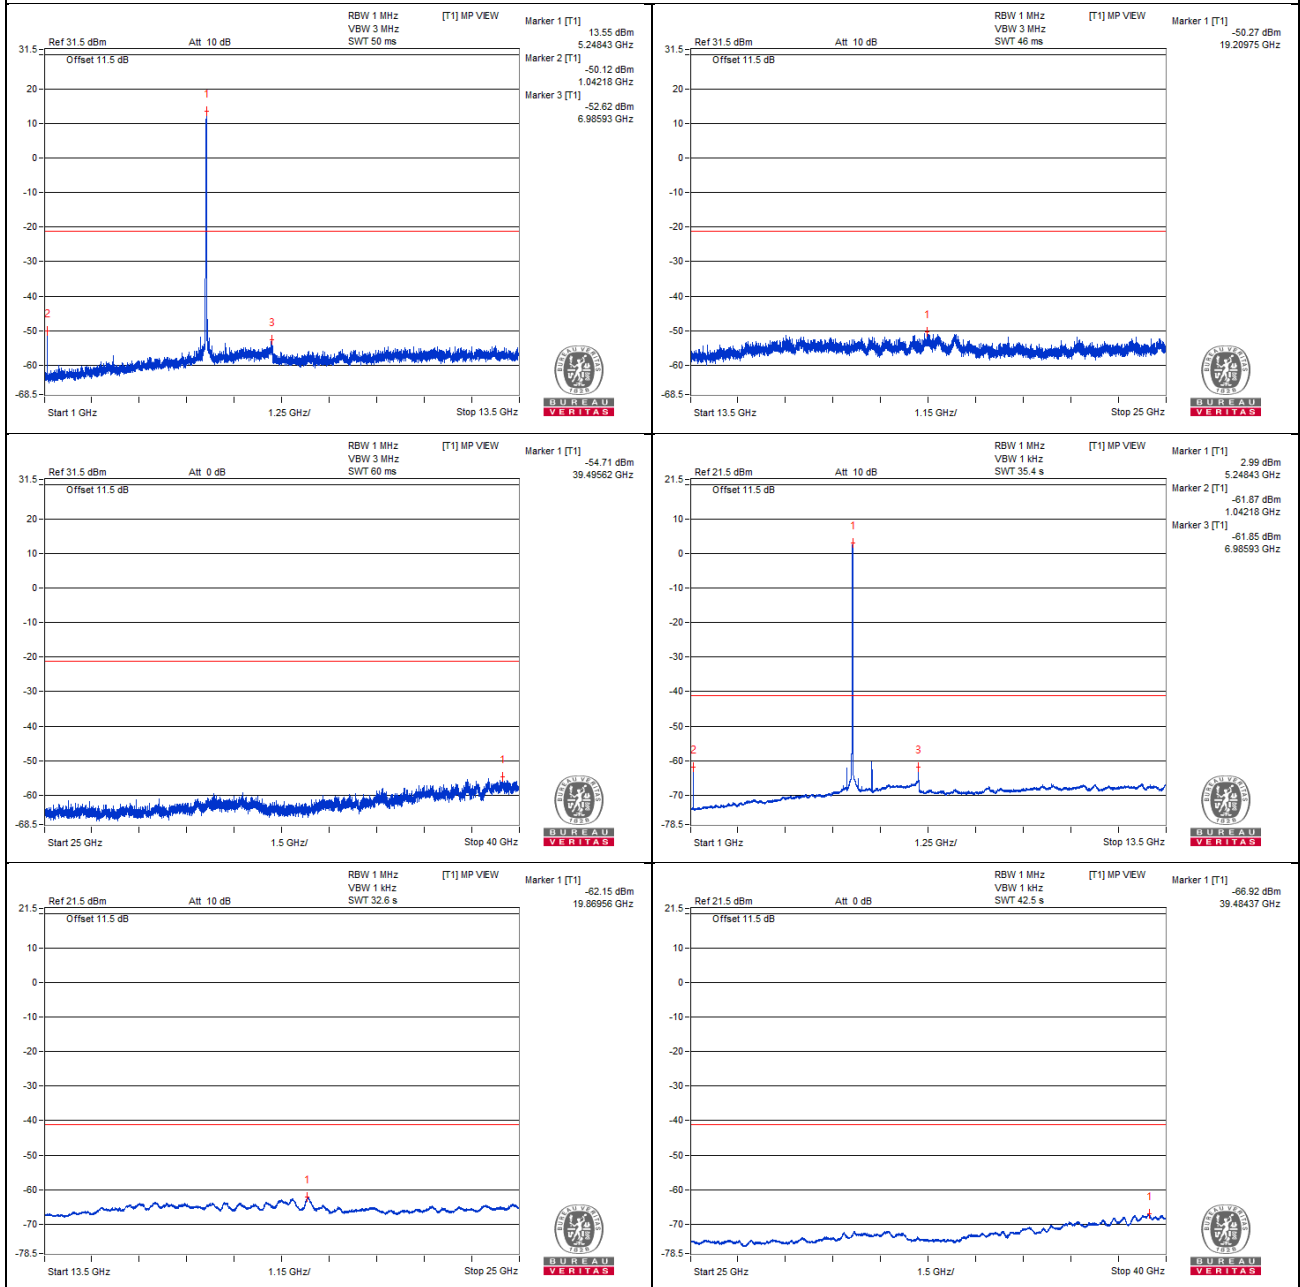

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5094.85 PK	53.73	74	-20.27	-50.91	-50.89	6.36	-41.53
2	5094.77 AV	42.03	54	-11.97	-62.65	-62.56	6.36	-53.23

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

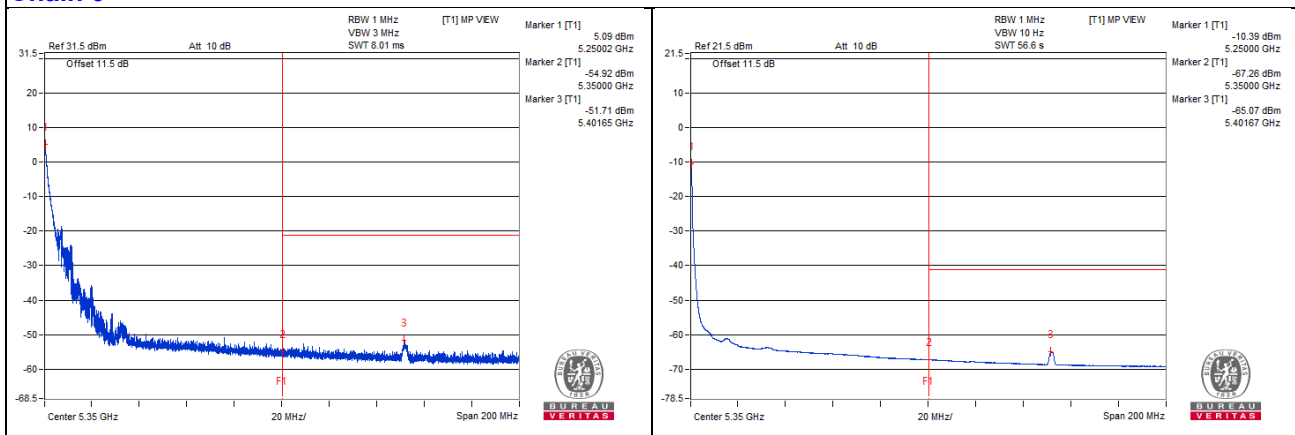

Chain 1

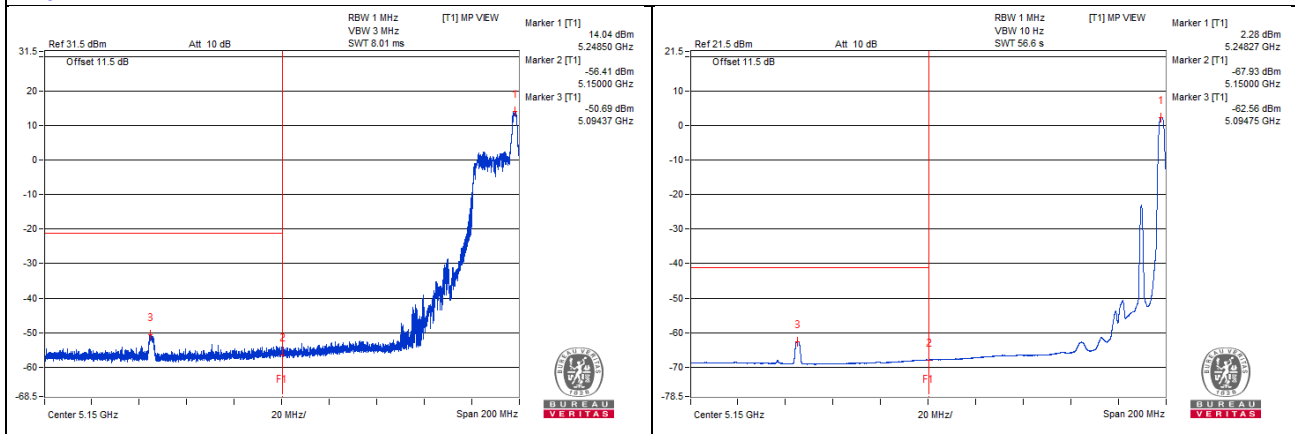

Channel 52

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	1045.31 PK	61.49	74	-12.51	-42.46	-51.4	8.17	-33.77
2	1045.31 AV	47.45	54	-6.55	-56.91	-63.12	8.17	-47.81
3	7014.06 PK	52	68.2	-16.2	-53.28	-56.02	8.17	-43.26
4	10518.75 PK	50.37	68.2	-17.83	-56.54	-55.65	8.17	-44.89
5	15778.43 PK	52.63	74	-21.37	-54.32	-53.36	8.17	-42.63
6	15781.31 AV	42.29	54	-11.71	-64.3	-64	8.17	-52.97

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

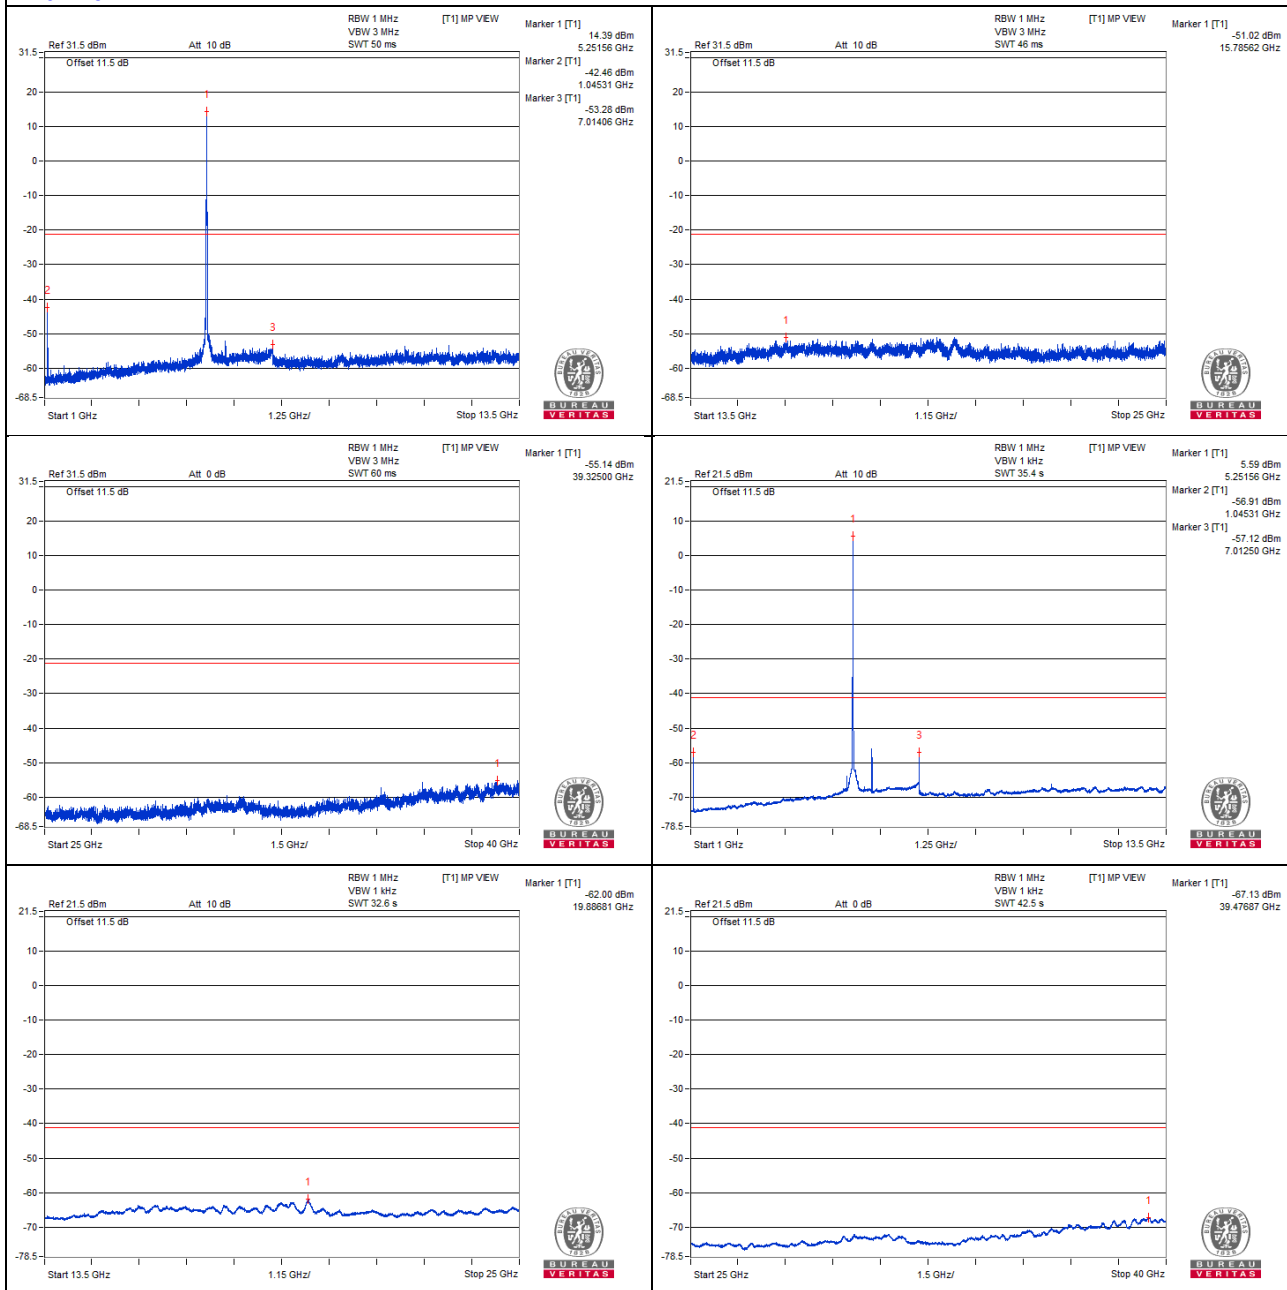

Chain 1

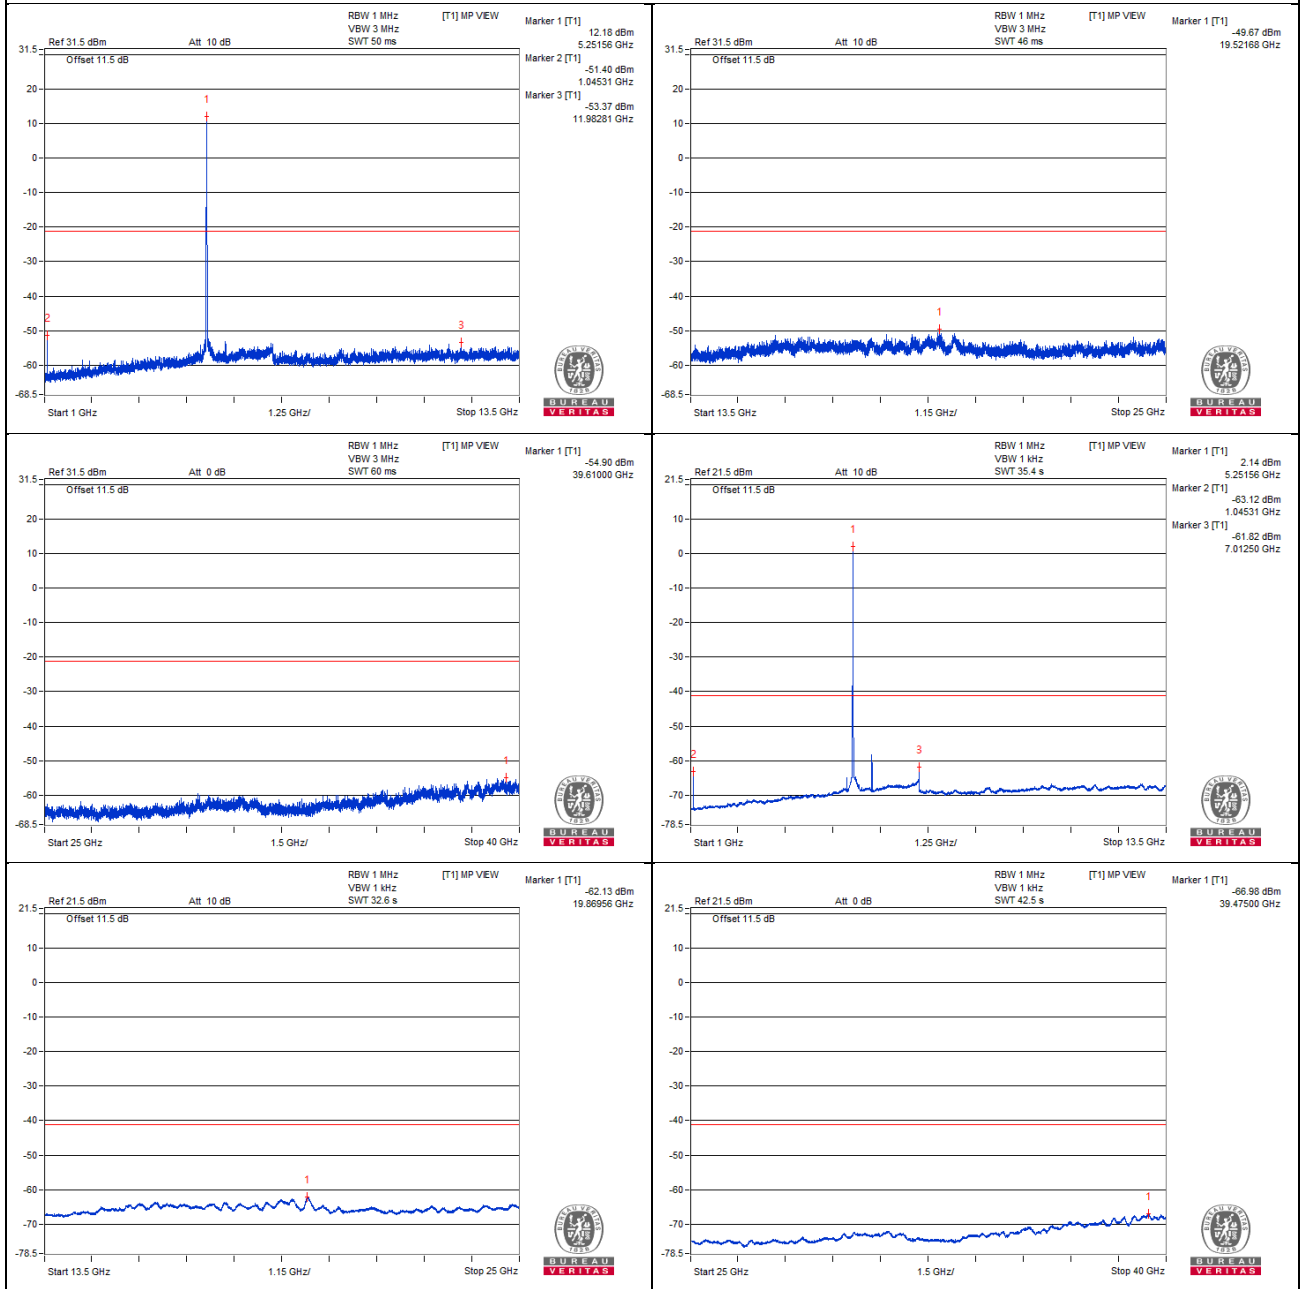

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5351.7 PK	53.06	74	-20.94	-52.49	-50.93	6.43	-42.2
2	5350.47 AV	39.19	54	-14.81	-64.69	-66.51	6.43	-56.07

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

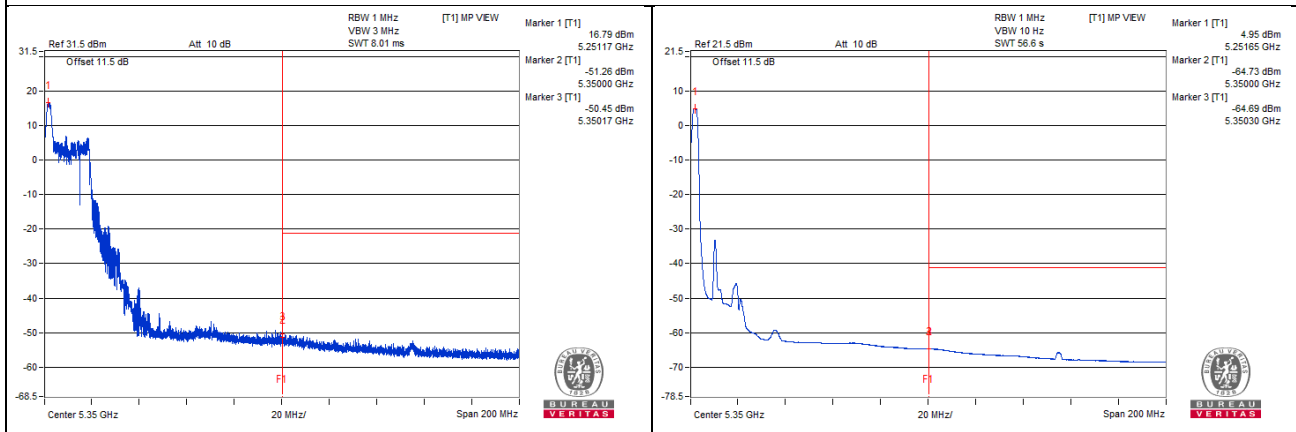

Chain 1

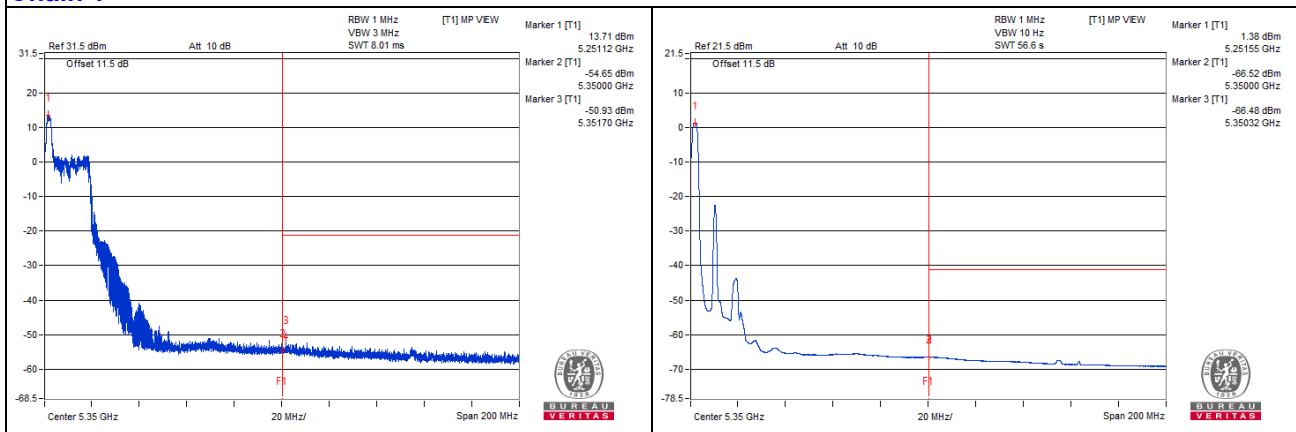

Channel 60

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	1103.12 PK	60.73	74	-13.27	-45	-46.56	8.17	-34.53
2	1103.12 AV	47.63	54	-6.37	-56.99	-62.02	8.17	-47.63
3	7067.18 PK	51.06	68.2	-17.14	-54.46	-56.55	8.17	-44.2
4	10600 PK	50.3	74	-23.7	-57.69	-55	8.17	-44.96
5	10600 AV	38.7	54	-15.3	-67.7	-67.78	8.17	-56.56
6	15902.06 PK	52.36	74	-21.64	-56.4	-52.57	8.17	-42.9
7	15897.75 AV	41.71	54	-12.29	-64.68	-64.79	8.17	-53.55

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

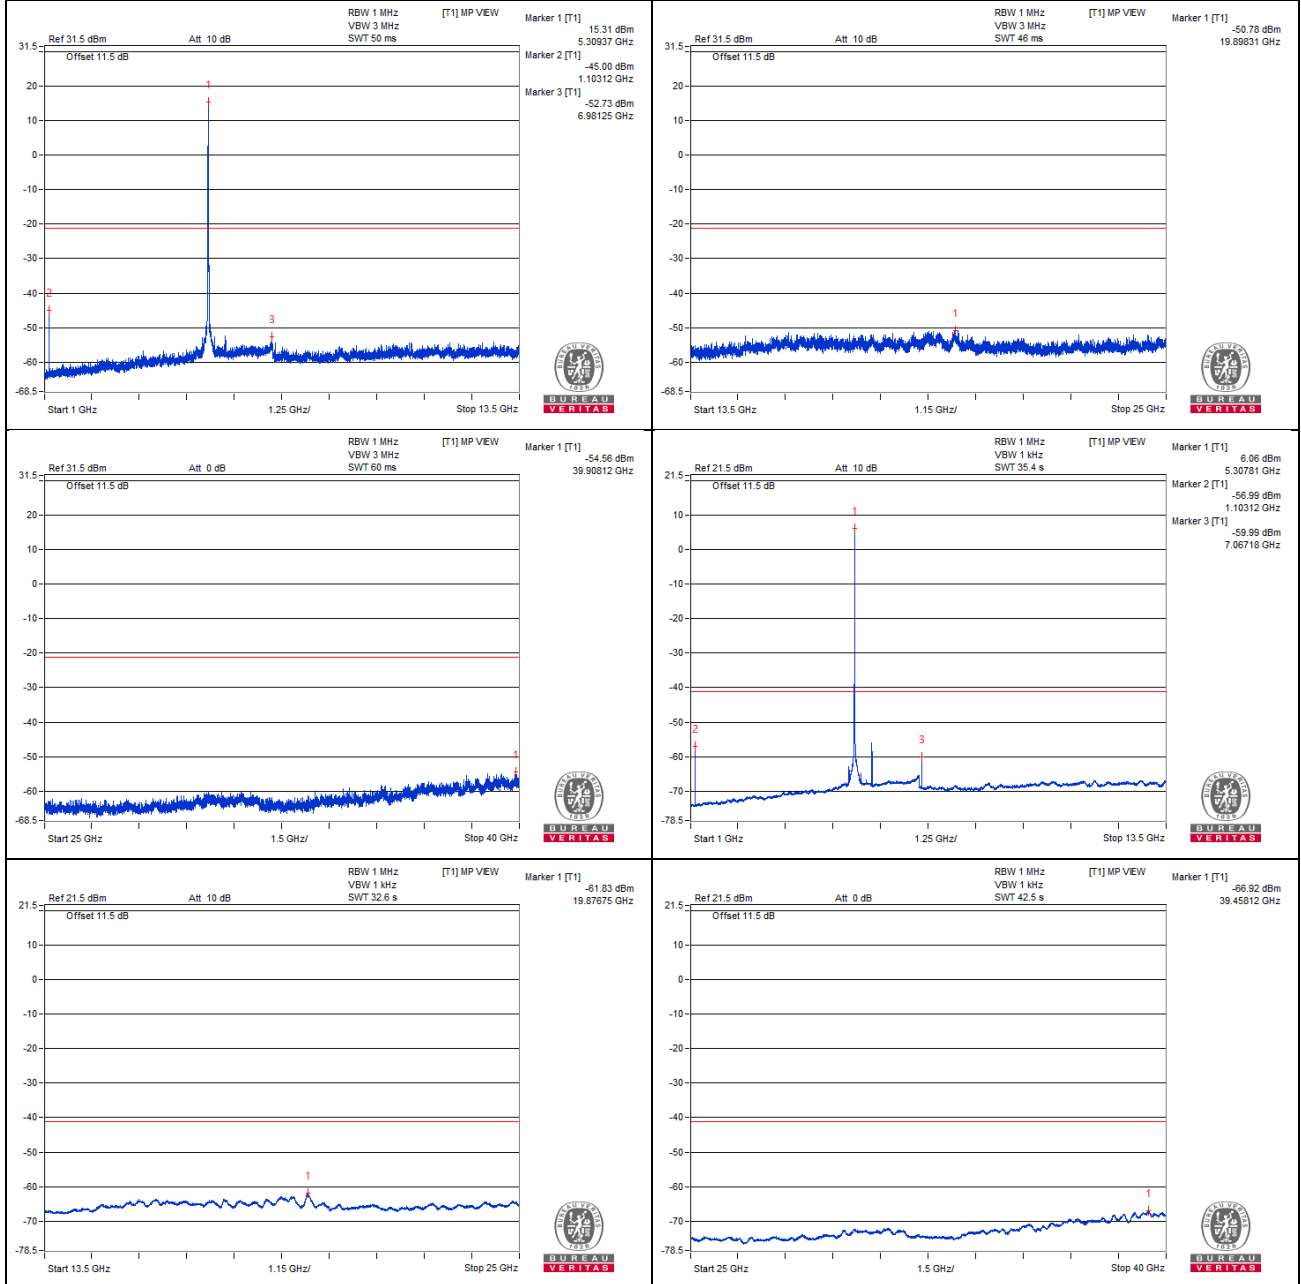

Chain 1

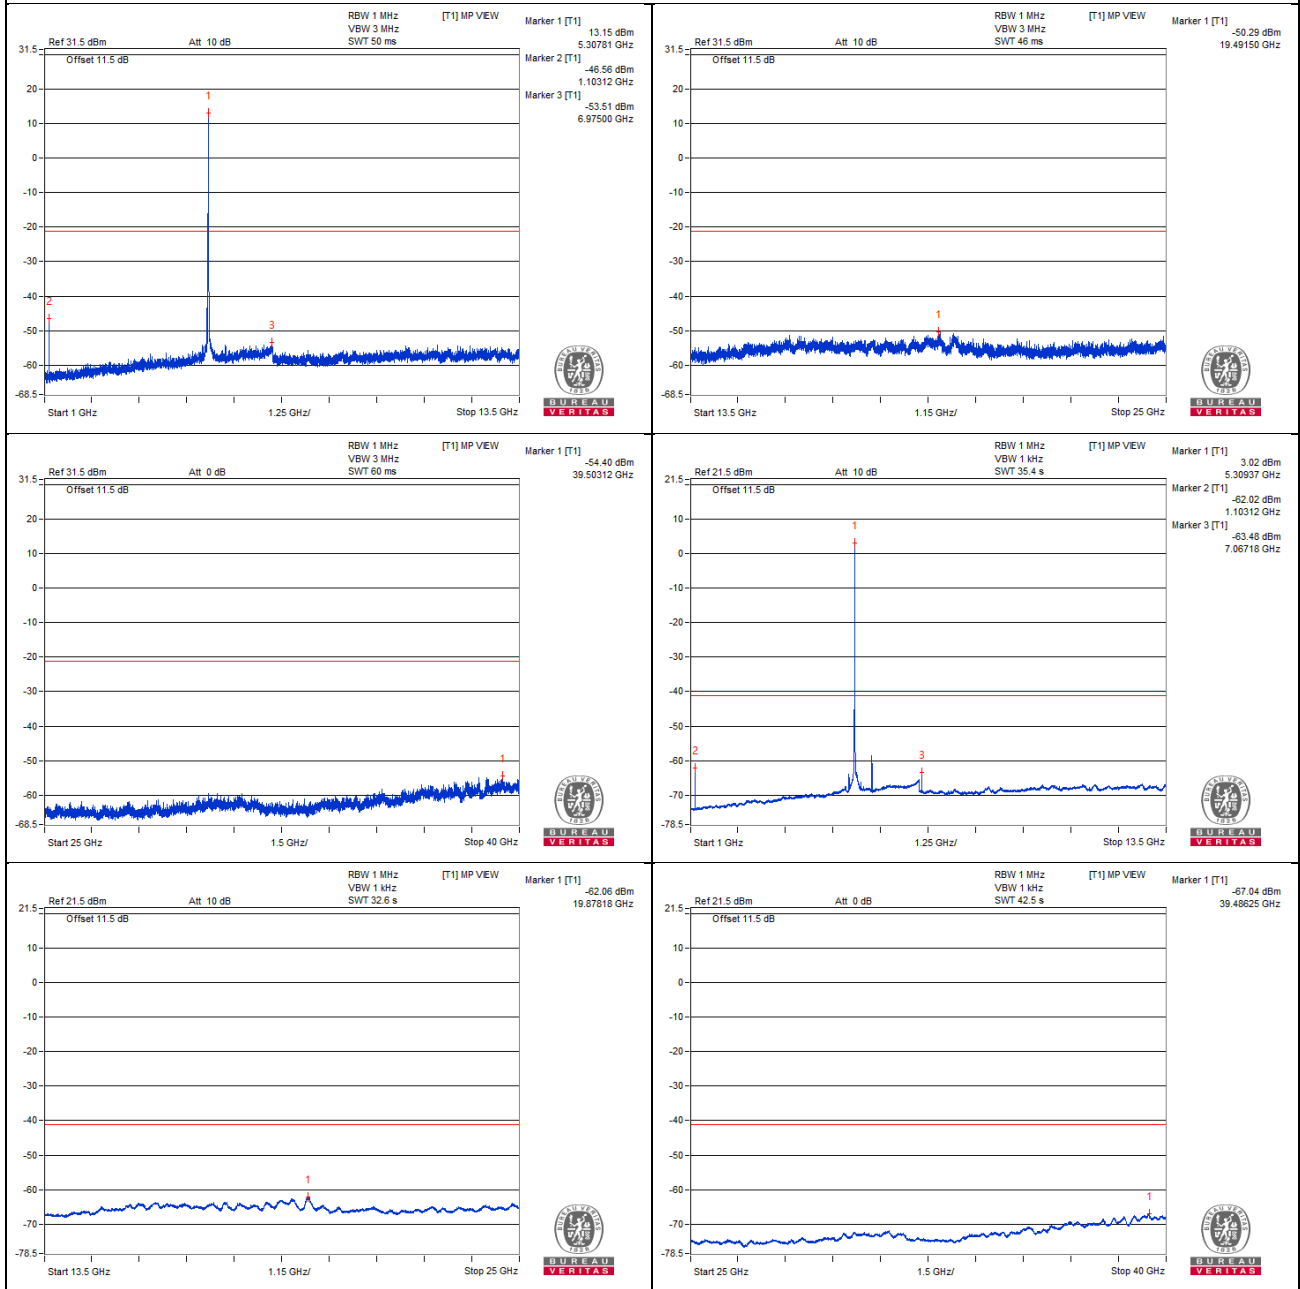

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5372.22 PK	54.61	74	-19.39	-48.85	-51.84	6.43	-40.65
2	5350.05 AV	41.04	54	-12.96	-62.69	-64.9	6.43	-54.22

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

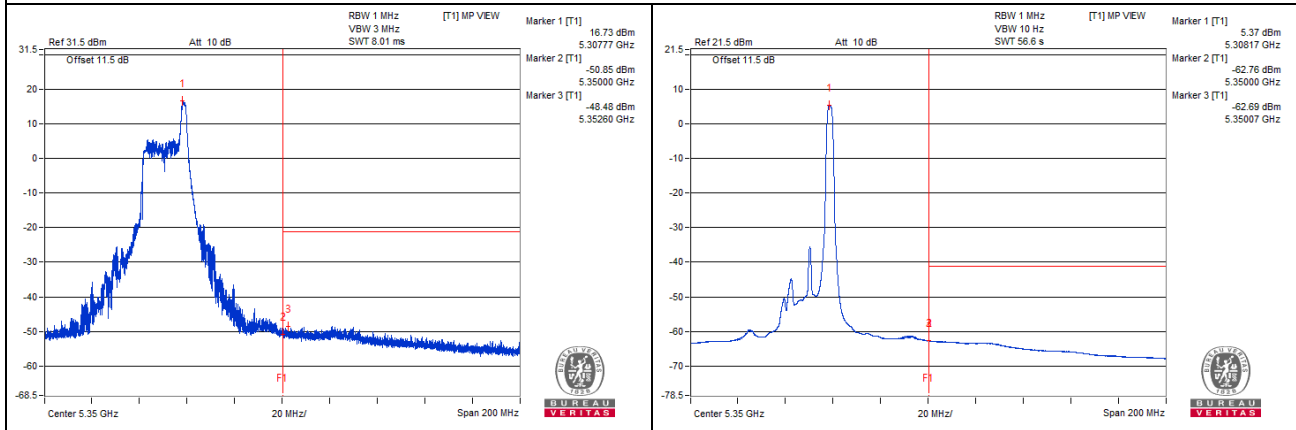

Chain 1

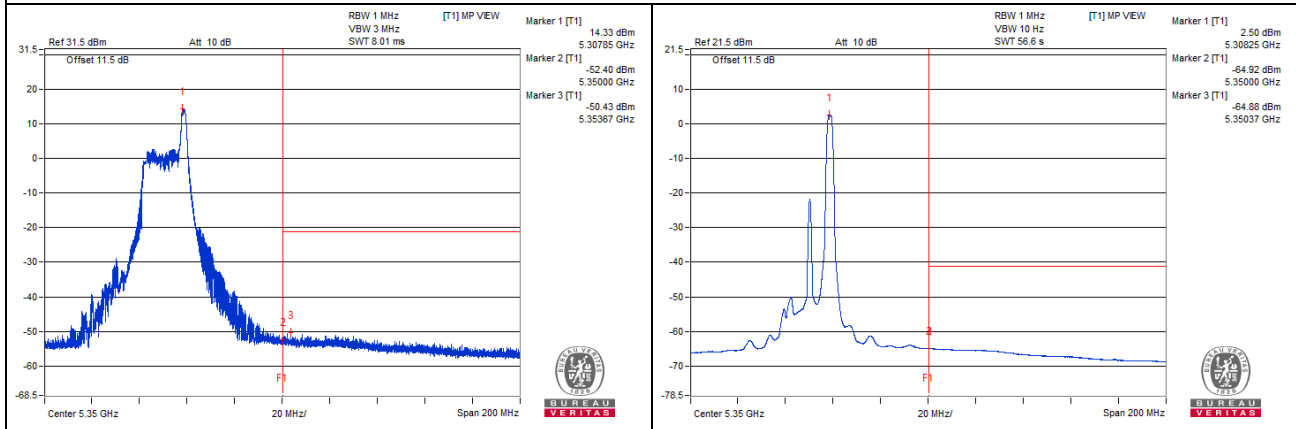

Channel 64


Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	1123.43 PK	61.79	74	-12.21	-42.73	-48.16	8.17	-33.47
2	1123.43 AV	46.71	54	-7.29	-58.01	-62.61	8.17	-48.55
3	7093.75 PK	51.41	68.2	-16.79	-53.94	-56.48	8.17	-43.85
4	10637.5 PK	50.47	74	-23.53	-55.31	-56.74	8.17	-44.79
5	10635.93 AV	38.7	54	-15.3	-67.81	-67.68	8.17	-56.56
6	15968.18 PK	52.43	74	-21.57	-53.06	-55.24	8.17	-42.83
7	15968.18 AV	40.9	54	-13.1	-65.35	-65.74	8.17	-54.36


Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8
 d = measurement distance in 3 meters.

Chain 0

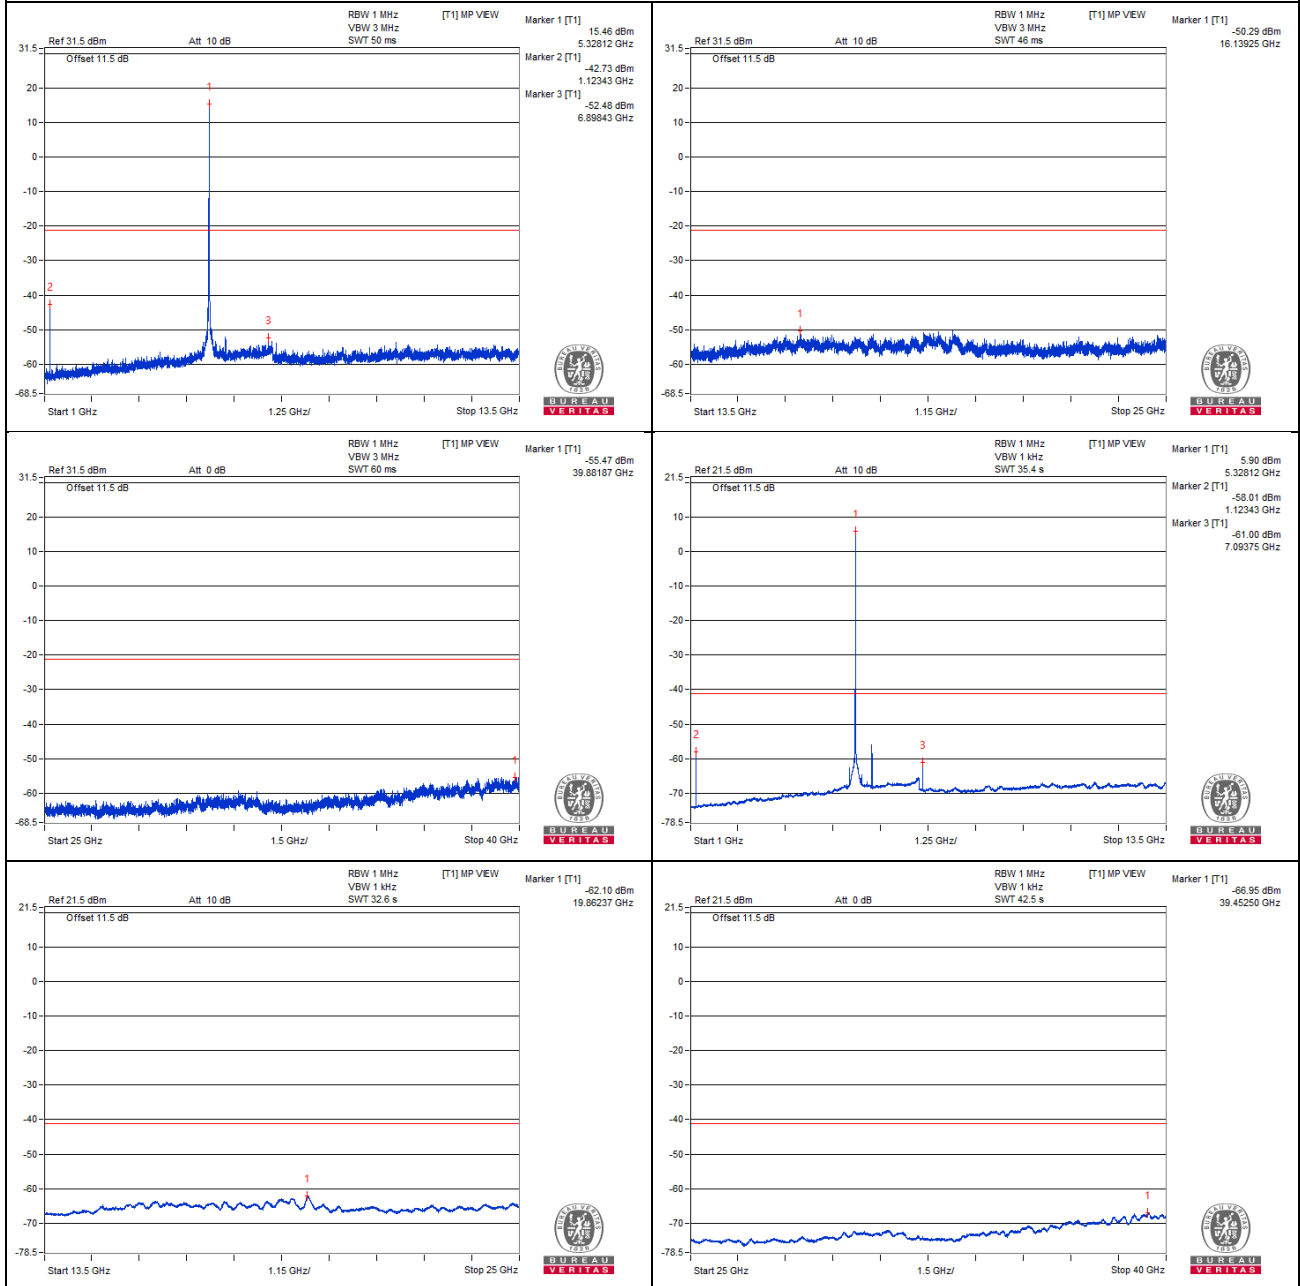

Chain 1

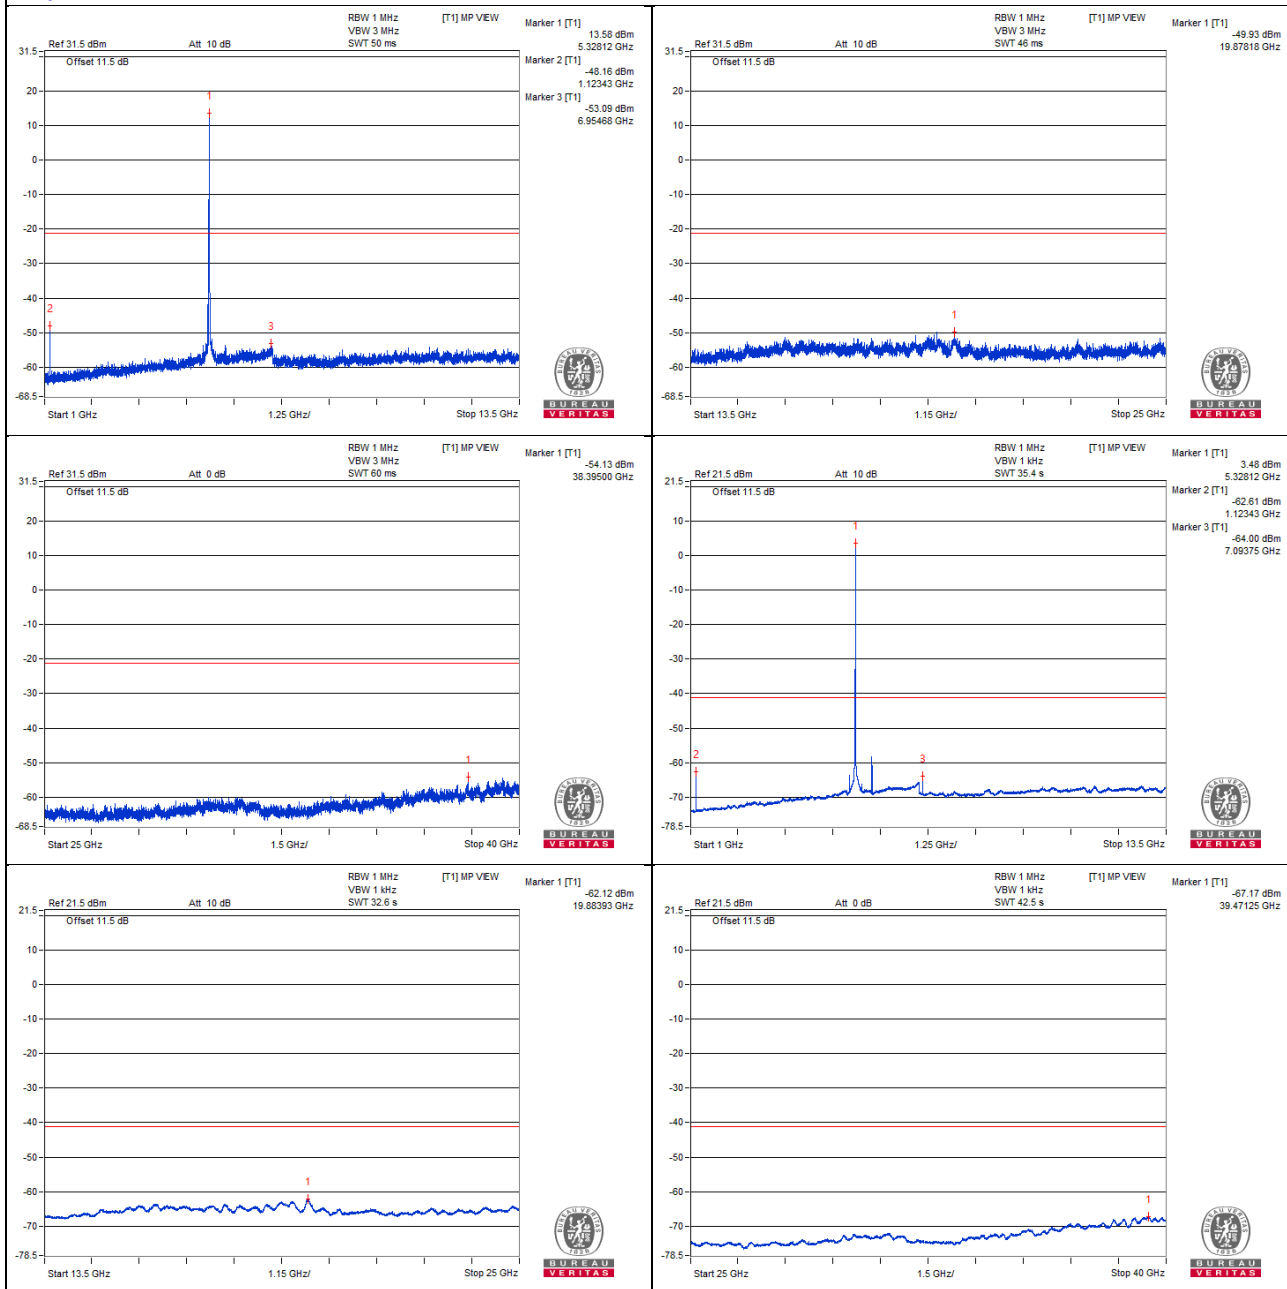

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5350.12 PK	63.33	74	-10.67	-43.12	-40.12	6.43	-31.93
2	5362.27 AV	41.94	54	-12.06	-61.93	-63.78	6.43	-53.32

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

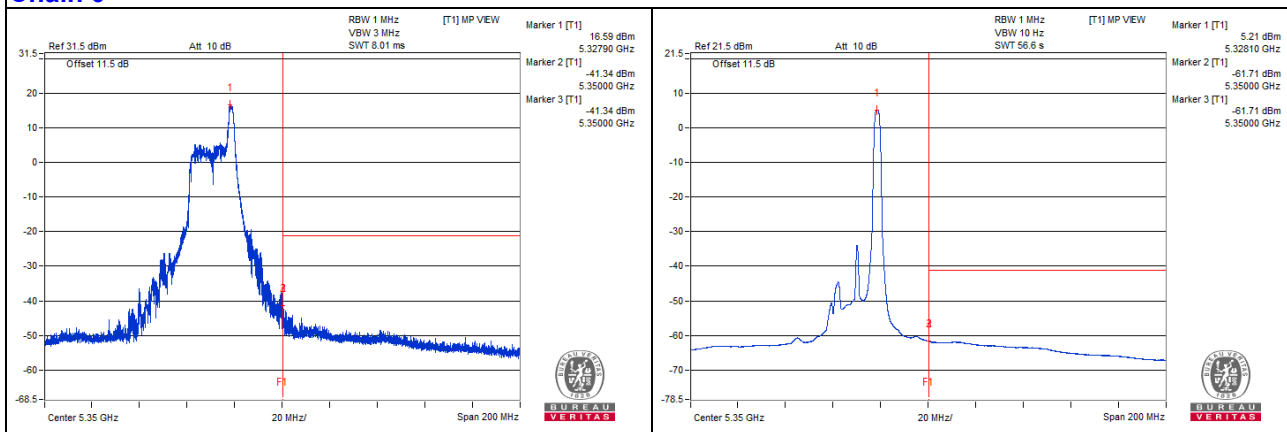

Chain 1

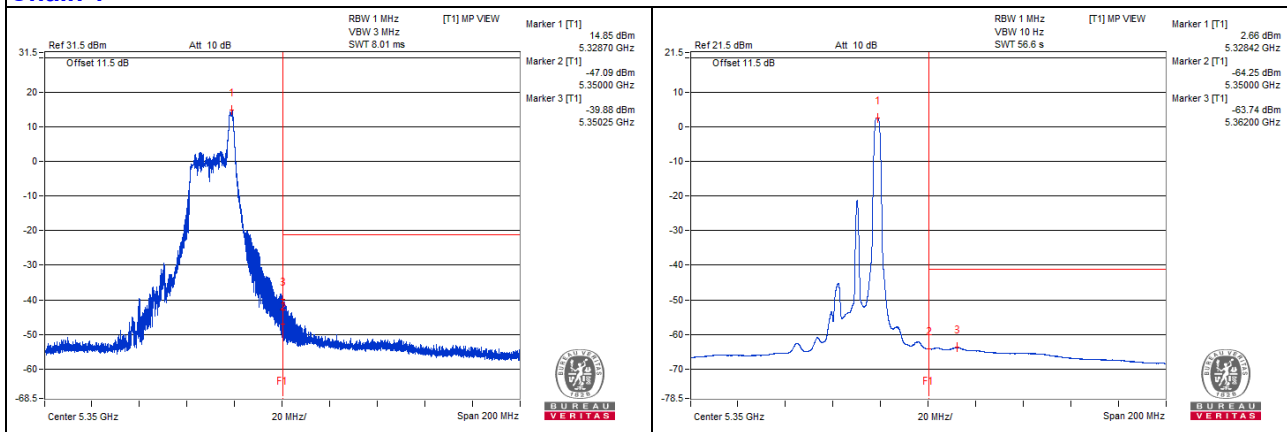

Channel 100

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	1285.93 PK	53.38	68.2	-14.82	-53.05	-53.08	8.17	-41.88
2	7328.12 PK	48.76	74	-25.24	-57.29	-58.11	8.17	-46.5
3	7326.56 AV	37.6	54	-16.4	-68.82	-68.86	8.17	-57.66
4	10995.31 PK	49.69	74	-24.31	-58.74	-55.39	8.17	-45.57
5	10995.31 AV	38.48	54	-15.52	-67.88	-68.04	8.17	-56.78
6	16492.87 PK	52.28	68.2	-15.92	-54.02	-54.3	8.17	-42.98

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

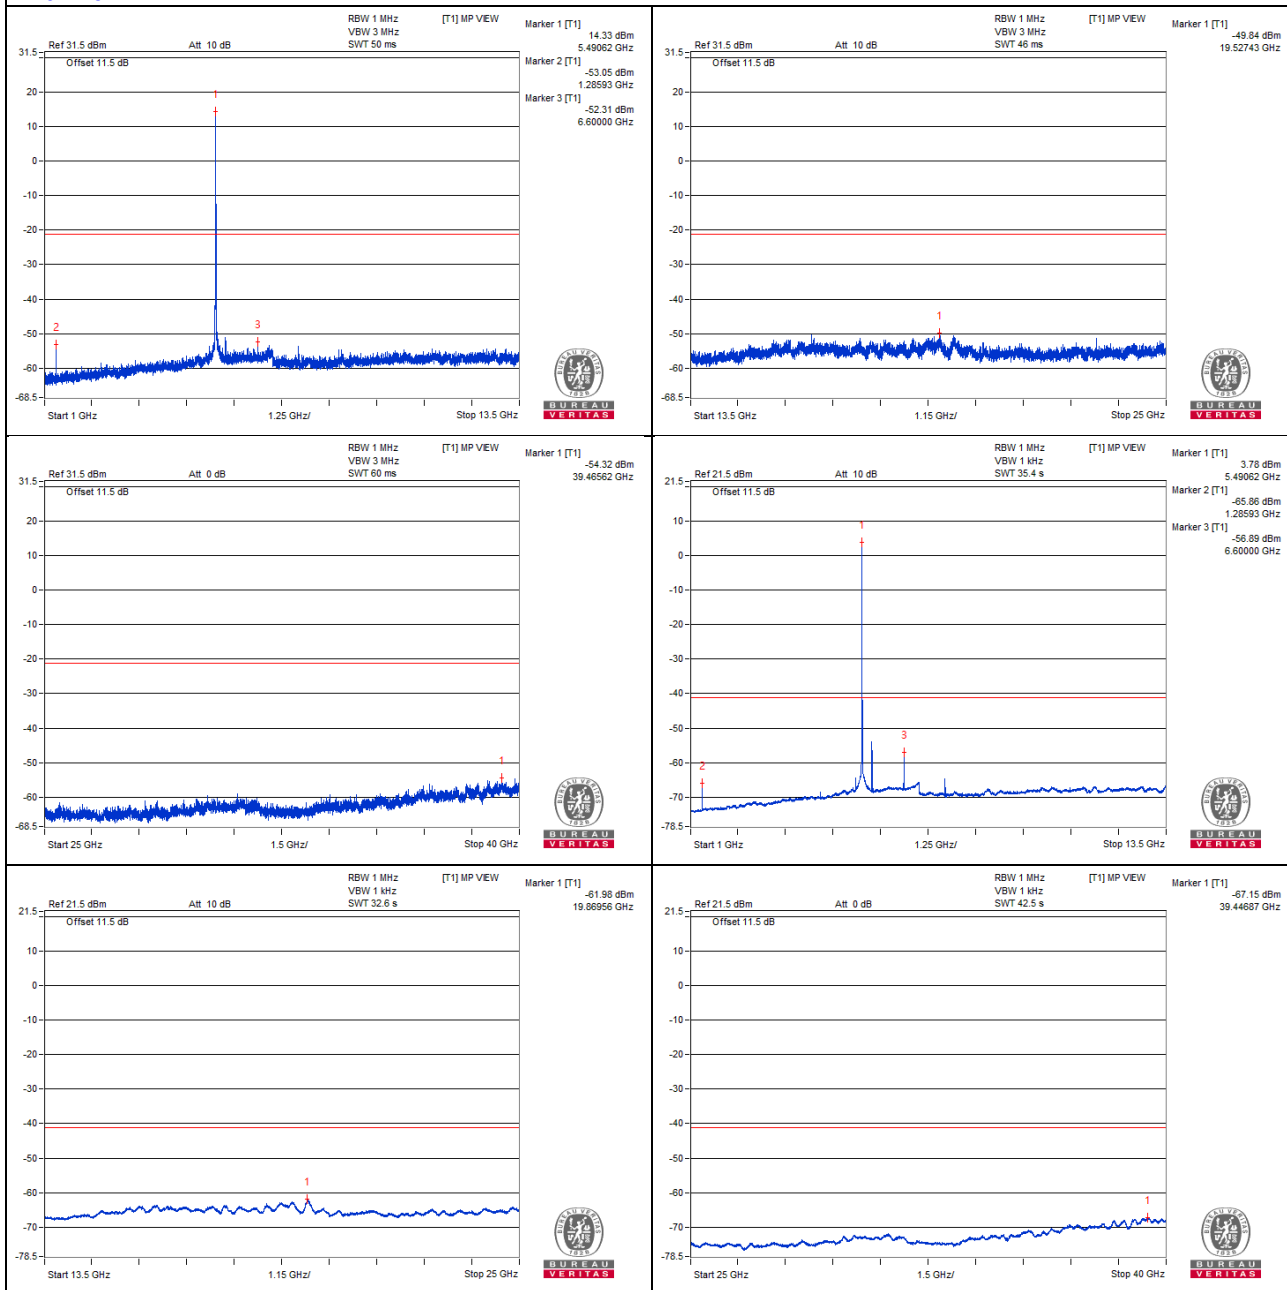

Chain 1

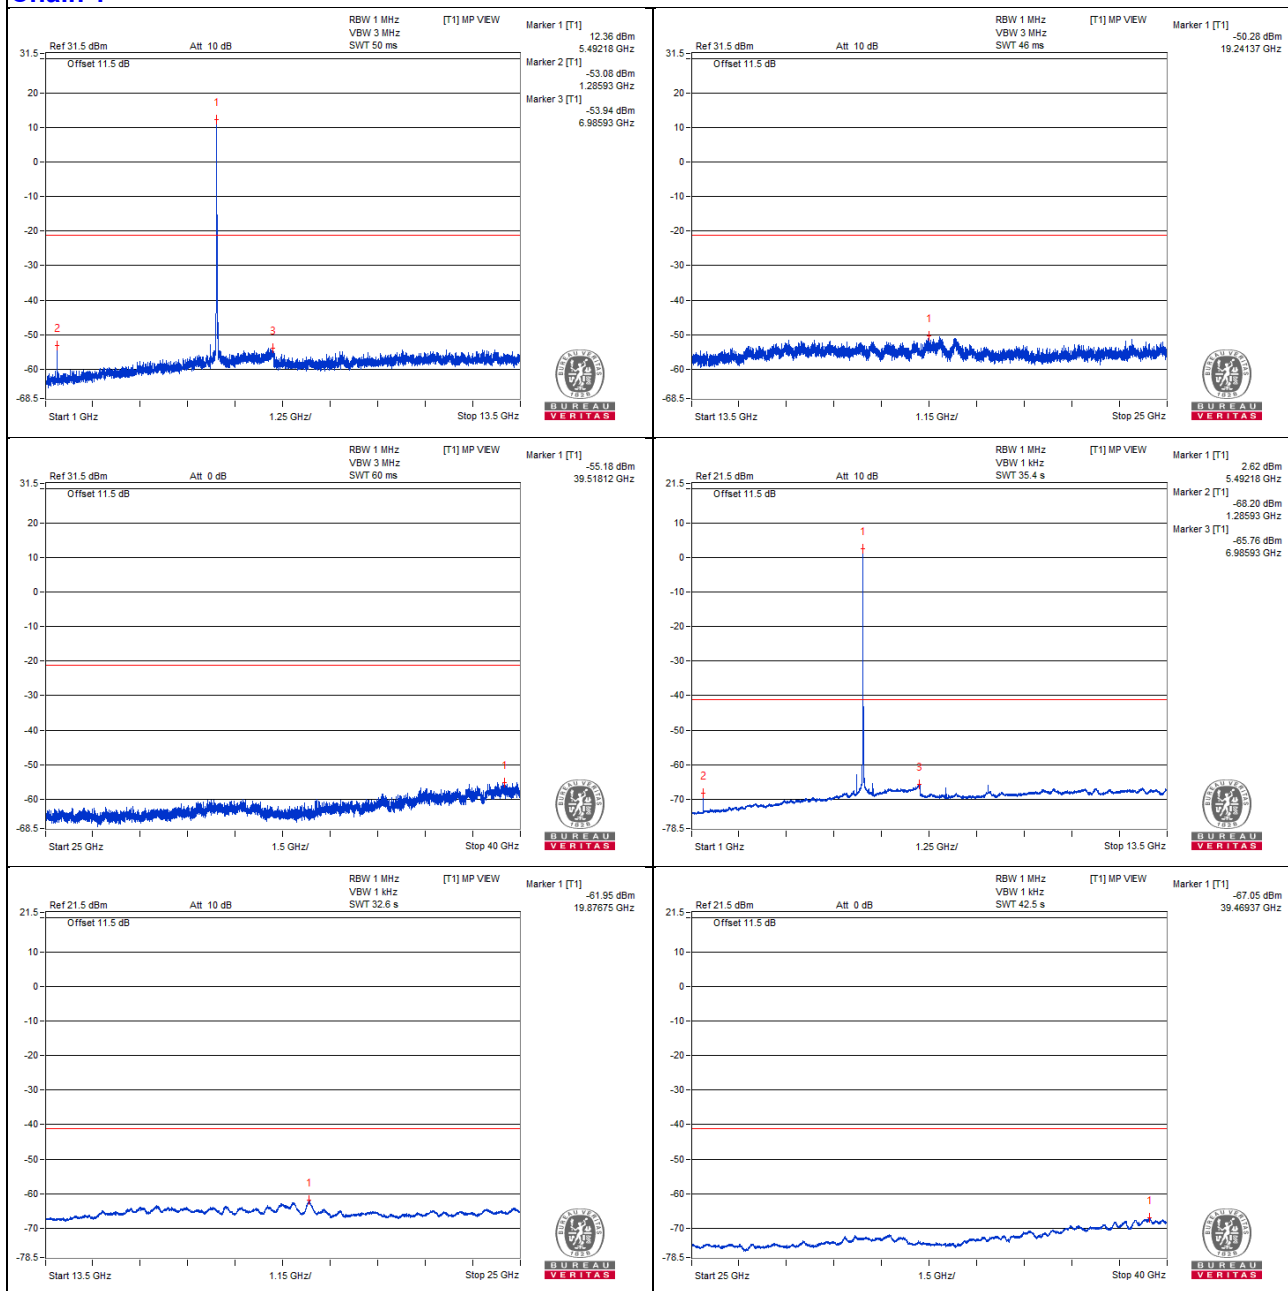

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5454.84 PK	55.06	74	-18.94	-49.39	-53.7	7.82	-40.2
2	5458.5 AV	40.68	54	-13.32	-64.58	-66.44	7.82	-54.58
3	5469.62 PK	62.13	68.2	-6.07	-42.61	-45.93	7.82	-33.13

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

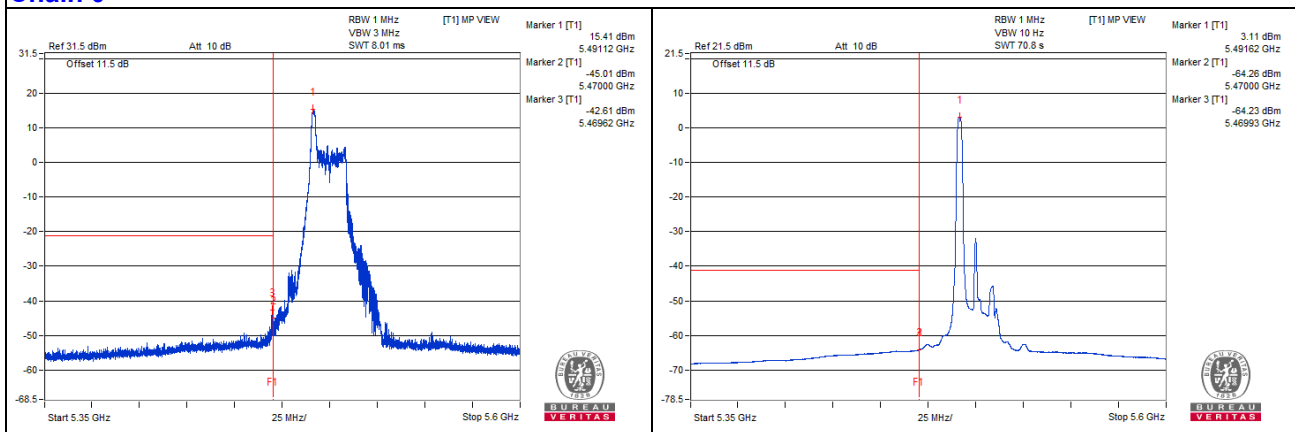

Chain 1

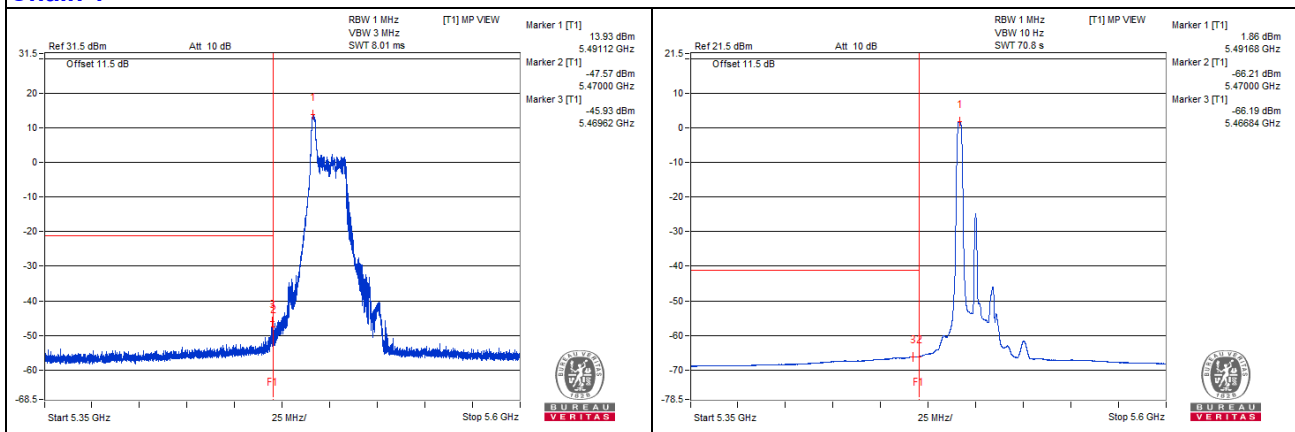

Channel 116

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	1365.62 PK	52.38	74	-21.62	-53.28	-55.01	8.17	-42.88
2	1365.62 AV	38.43	54	-15.57	-67.2	-69	8.17	-56.83
3	7437.5 PK	48.45	74	-25.55	-58.02	-57.97	8.17	-46.81
4	7439.06 AV	37.27	54	-16.73	-69.26	-69.09	8.17	-57.99
5	11159.37 PK	49.7	74	-24.3	-55.96	-57.7	8.17	-45.56
6	11159.37 AV	38.76	54	-15.24	-67.65	-67.71	8.17	-56.5
7	16740.12 PK	52.71	68.2	-15.49	-52.88	-54.78	8.17	-42.55

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

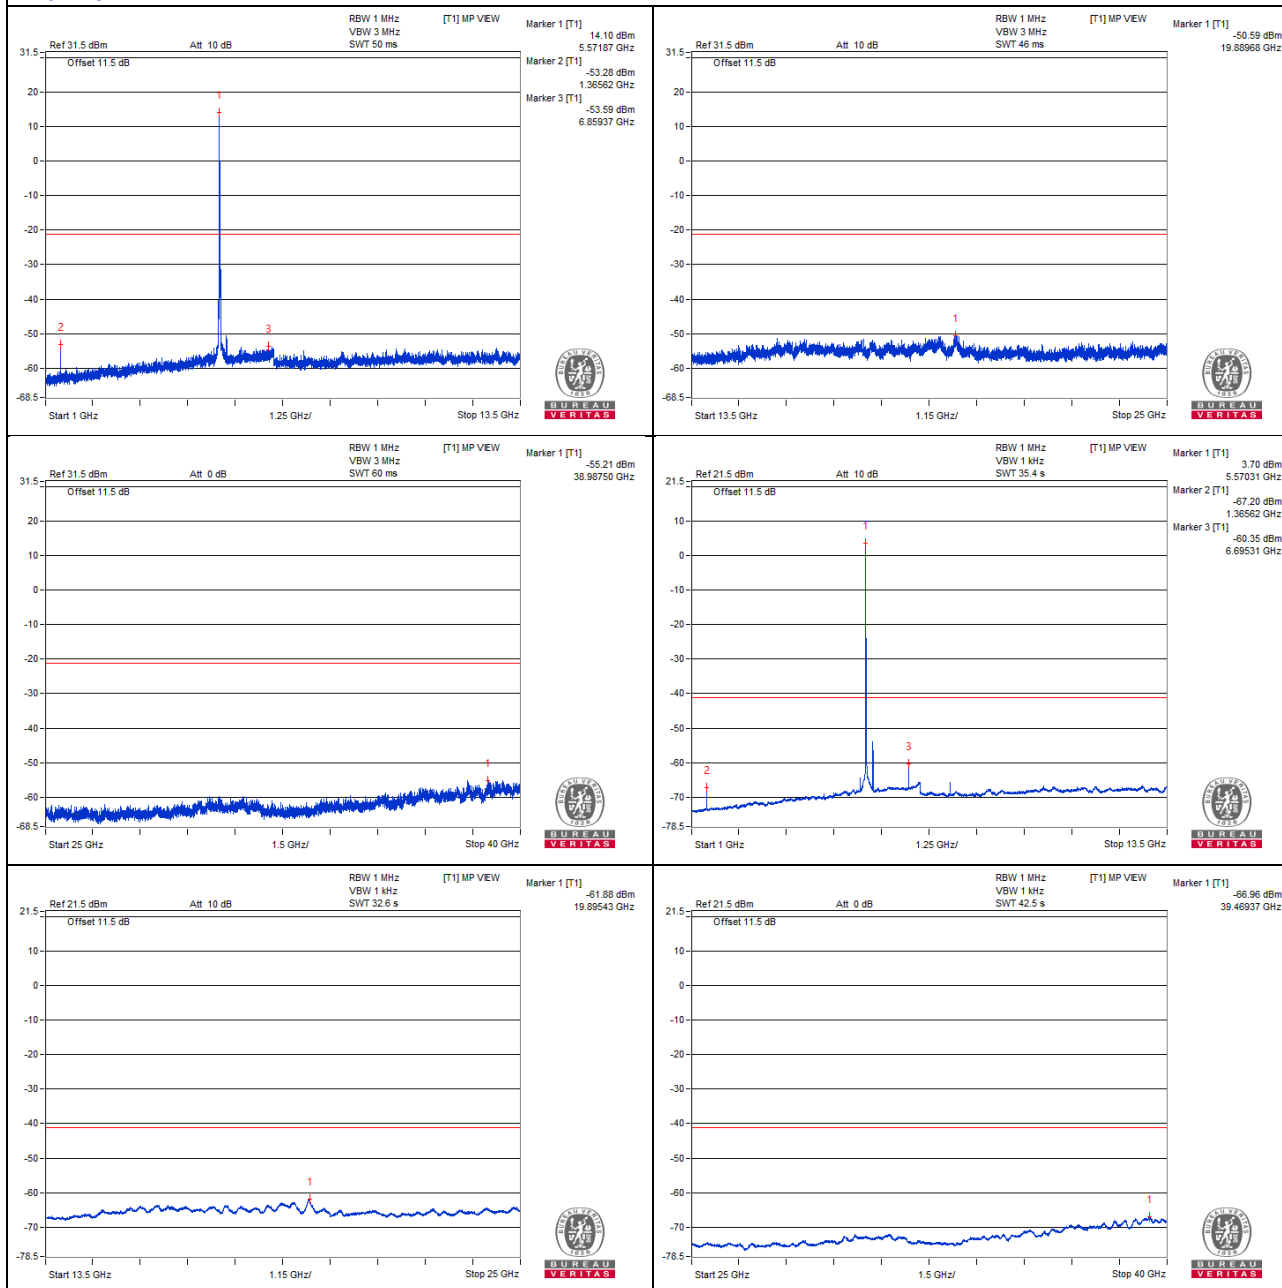

Chain 1

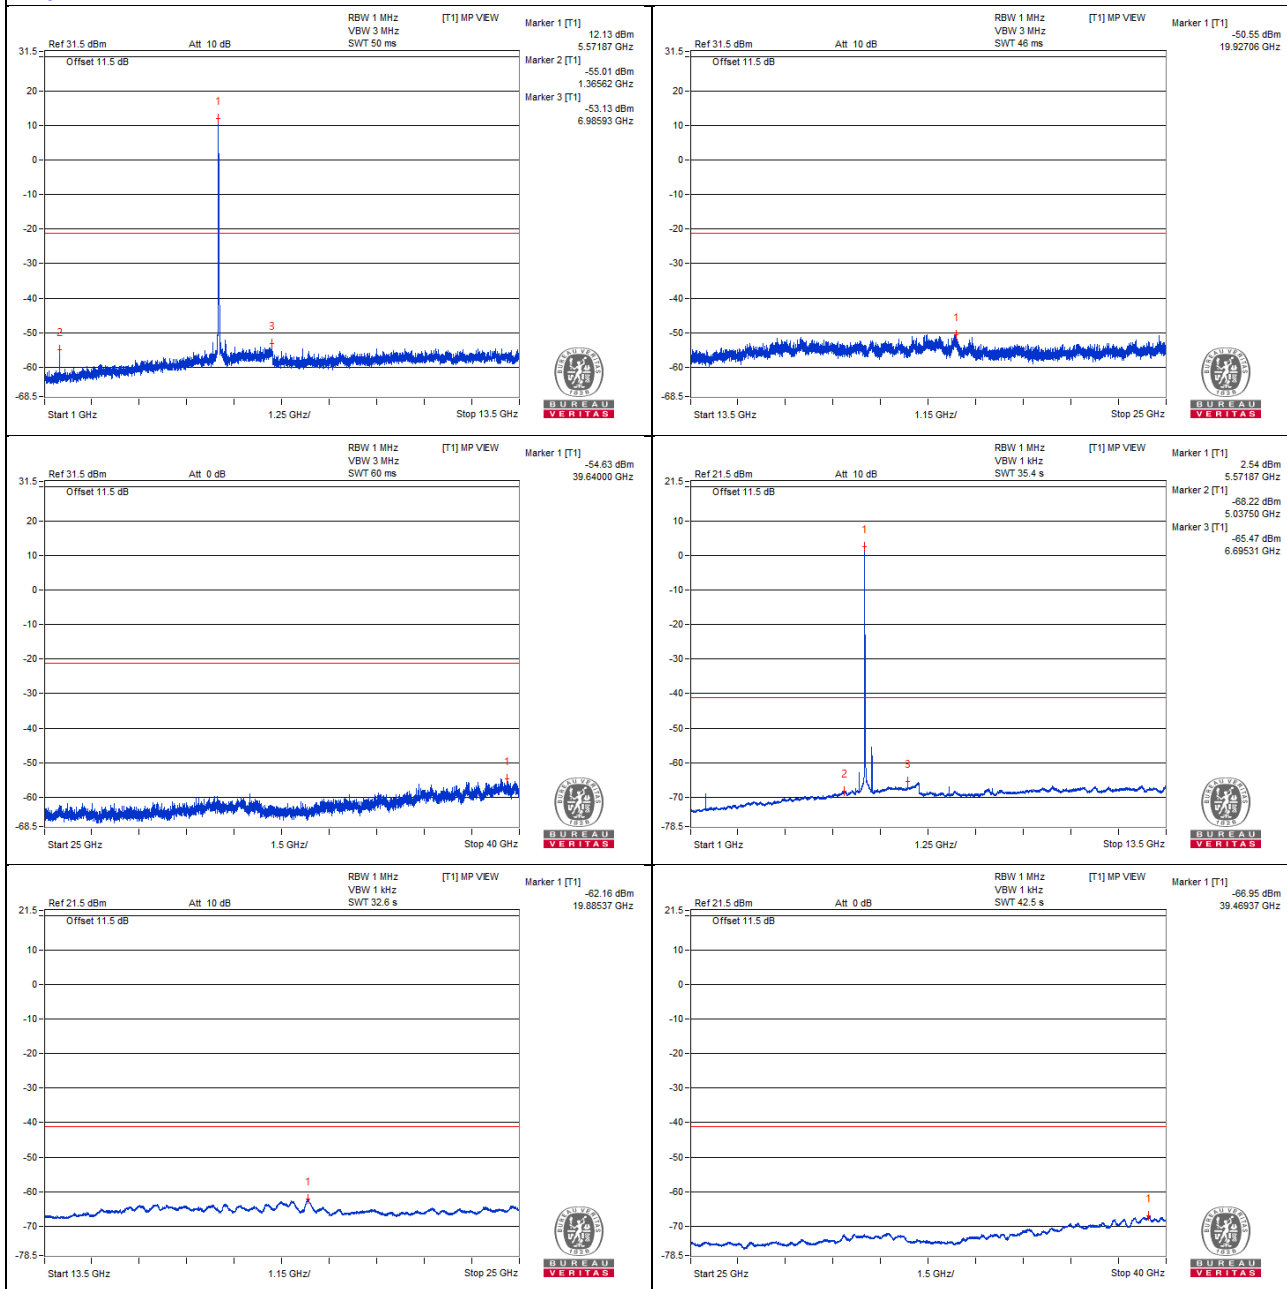

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5417.71 PK	54.41	74	-19.59	-54.5	-49.98	7.82	-40.85
2	5418.03 AV	41.74	54	-12.26	-65.28	-63.58	7.82	-53.52
3	5463.81 PK	50.99	68.2	-17.21	-55.47	-54.76	7.82	-44.27

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

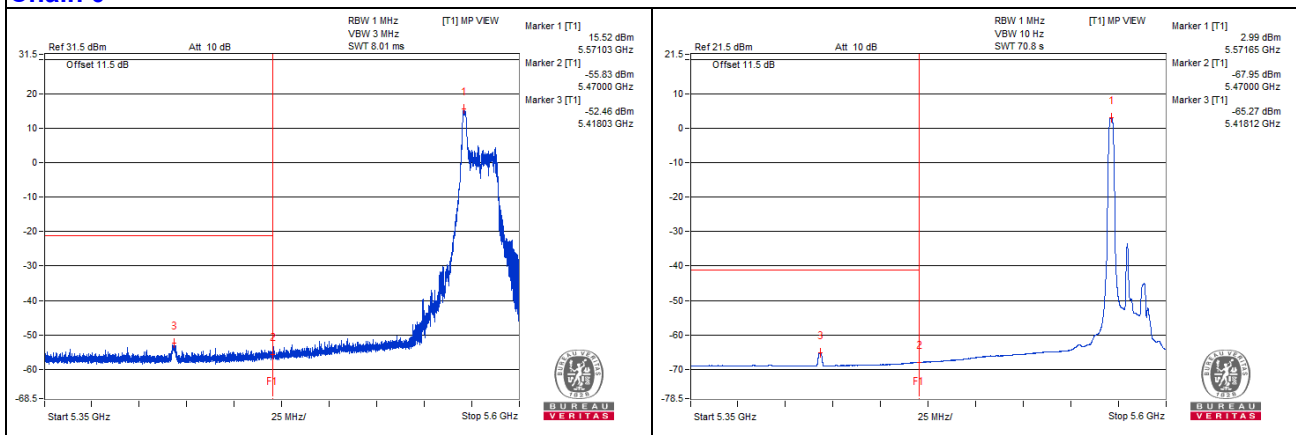

Chain 1

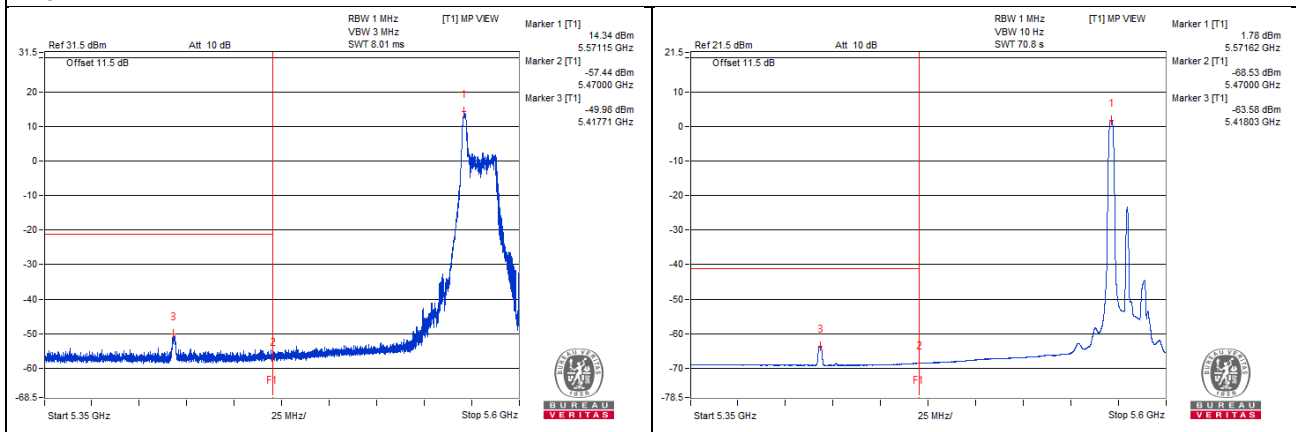

Channel 140

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	1503.12 PK	53.81	74	-20.19	-51.23	-54.72	8.17	-41.45
2	1503.12 AV	39.43	54	-14.57	-66.09	-68.19	8.17	-55.83
3	7593.75 PK	49.08	74	-24.92	-56.05	-59.26	8.17	-46.18
4	7590.62 AV	37.48	54	-16.52	-68.85	-69.07	8.17	-57.78
5	11392.18 PK	50.11	74	-23.89	-56.13	-56.54	8.17	-45.15
6	11392.18 AV	38.93	54	-15.07	-67.41	-67.61	8.17	-56.33
7	17095.18 PK	52.56	68.2	-15.64	-55.24	-52.84	8.17	-42.7

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

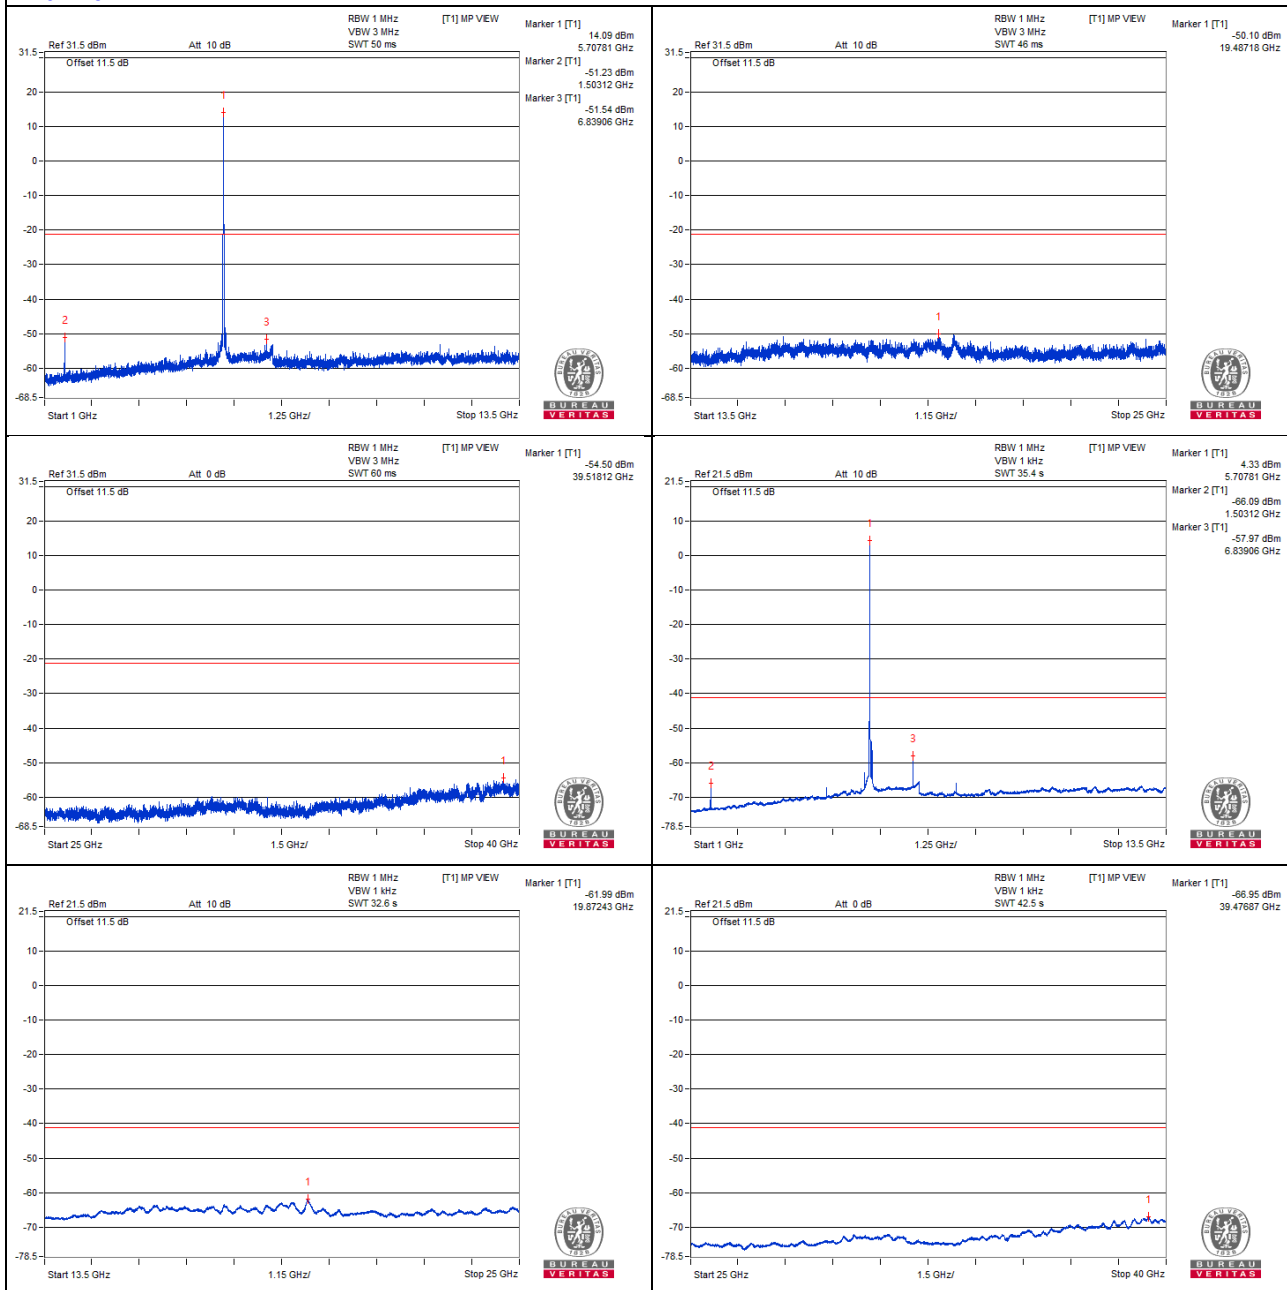

Chain 1

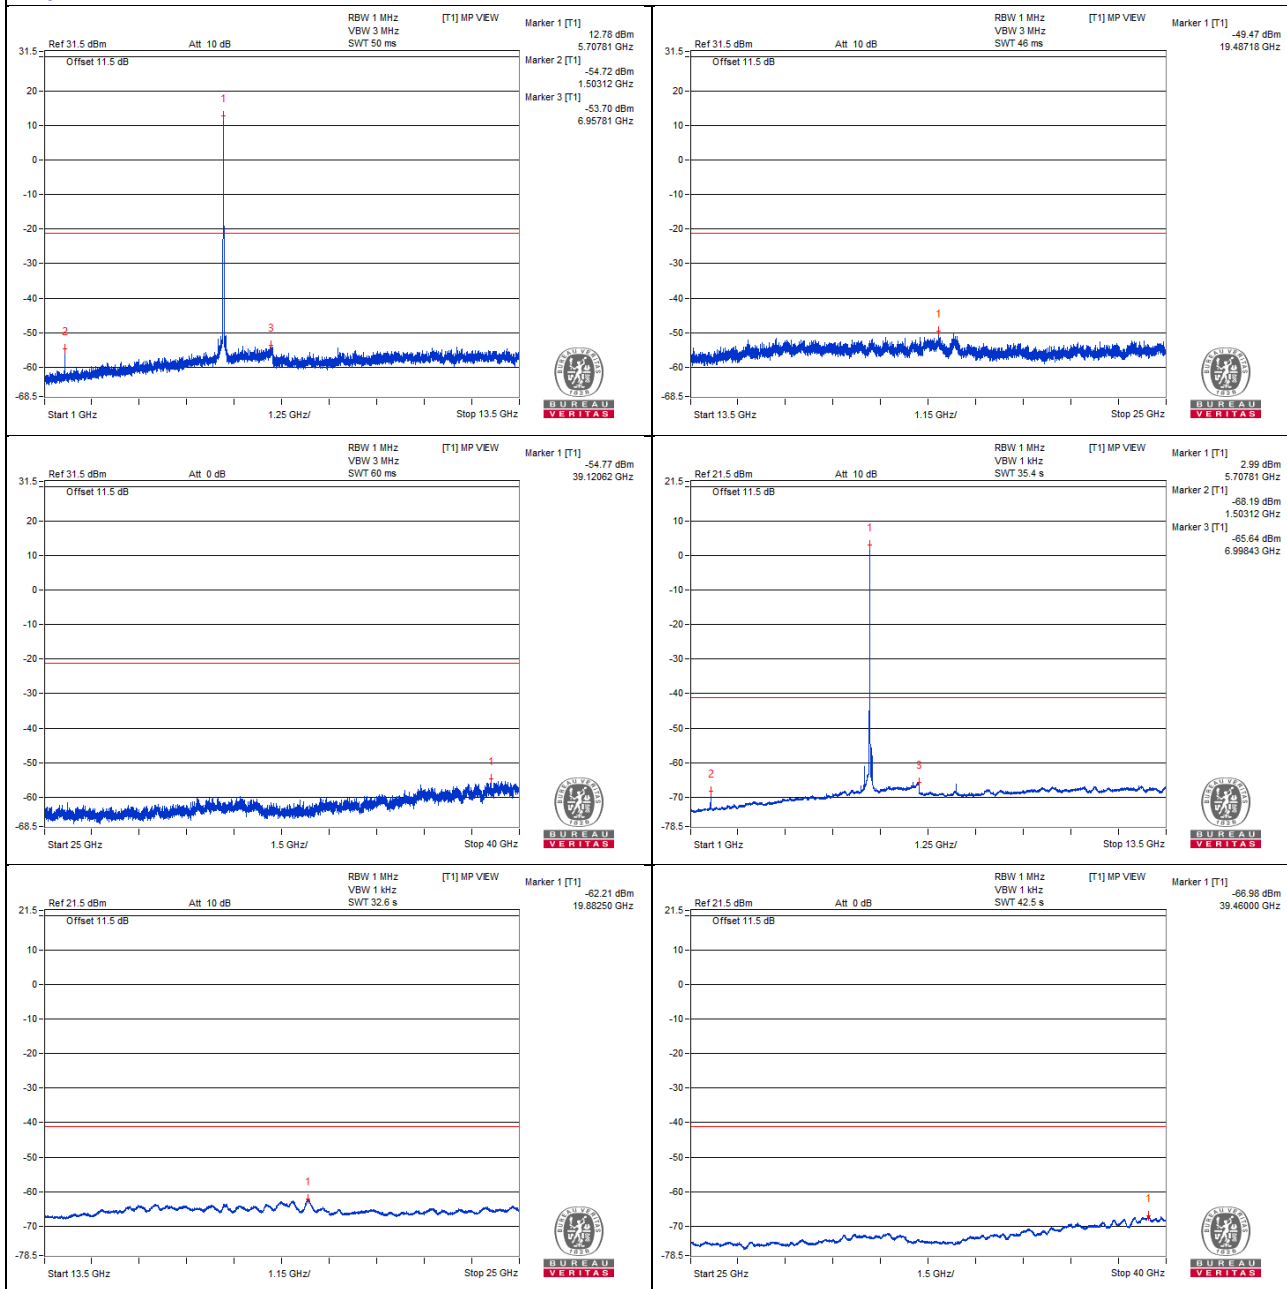

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5725.02 PK	66.94	68.2	-1.26	-37.28	-42.52	7.82	-28.32

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

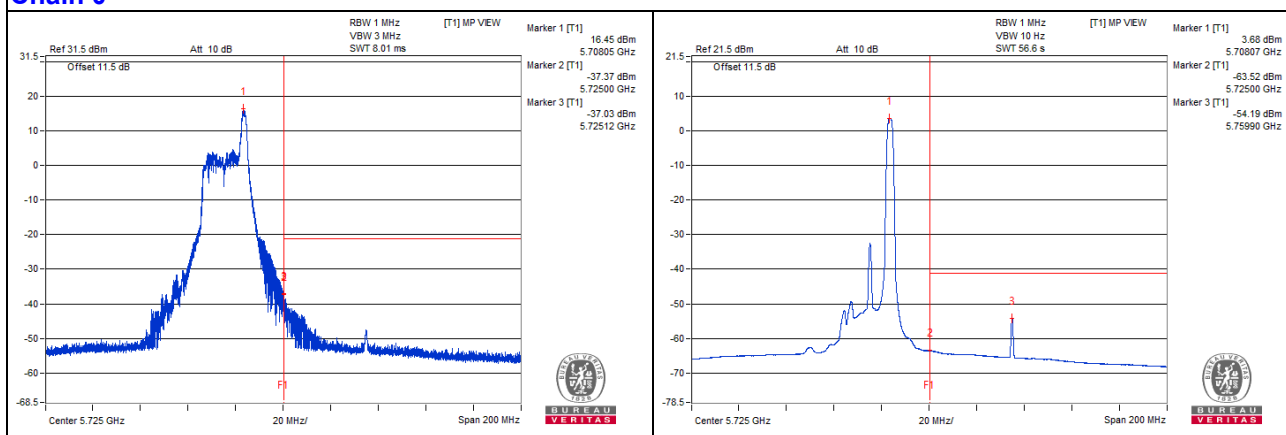

Chain 1

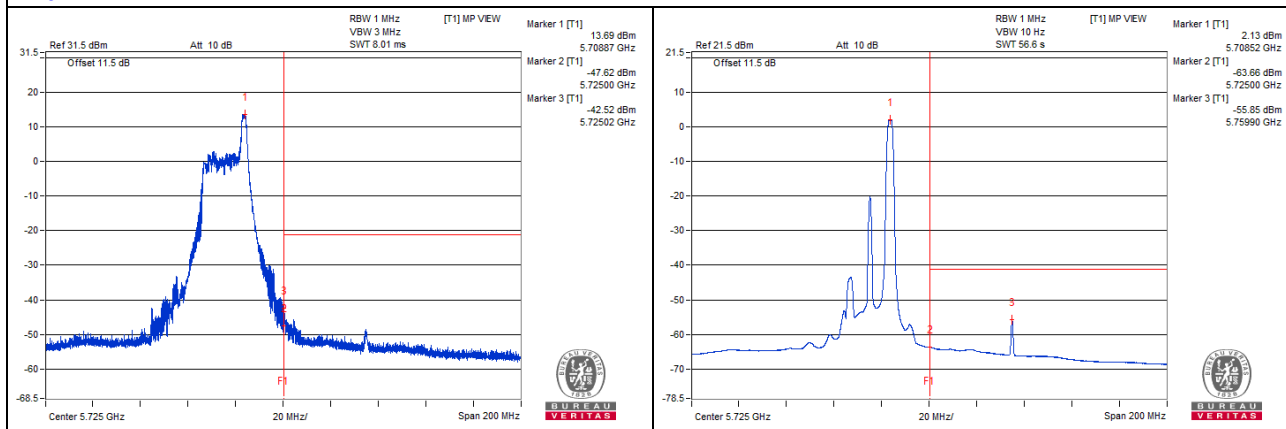

Channel 144

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	1521.87 PK	52.62	74	-21.38	-52.01	-57	8.17	-42.64
2	1523.43 AV	39.99	54	-14.01	-65.51	-67.66	8.17	-55.27
3	7625 PK	49	74	-25	-57.9	-57.02	8.17	-46.26
4	7618.75 AV	37.53	54	-16.47	-68.93	-68.9	8.17	-57.73
5	11448.43 PK	49.85	74	-24.15	-55.85	-57.48	8.17	-45.41
6	11434.37 AV	38.19	54	-15.81	-68.37	-68.14	8.17	-57.07
7	17168.5 PK	52.51	68.2	-15.69	-53.13	-54.92	8.17	-42.75

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

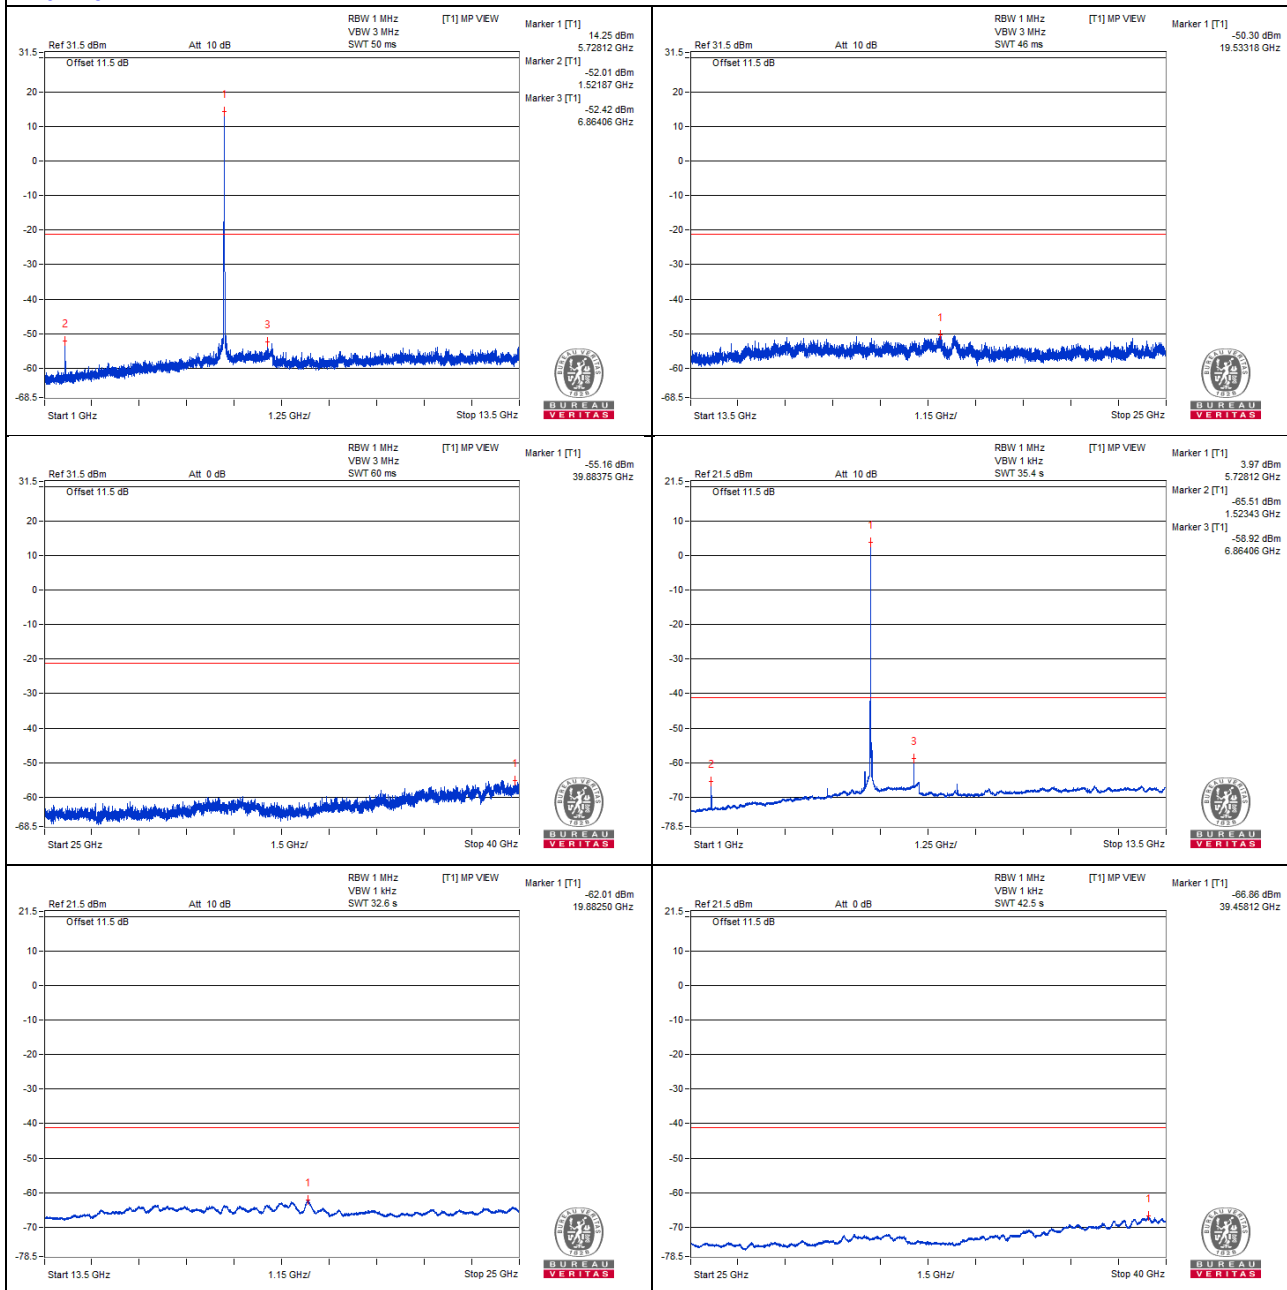

Chain 1

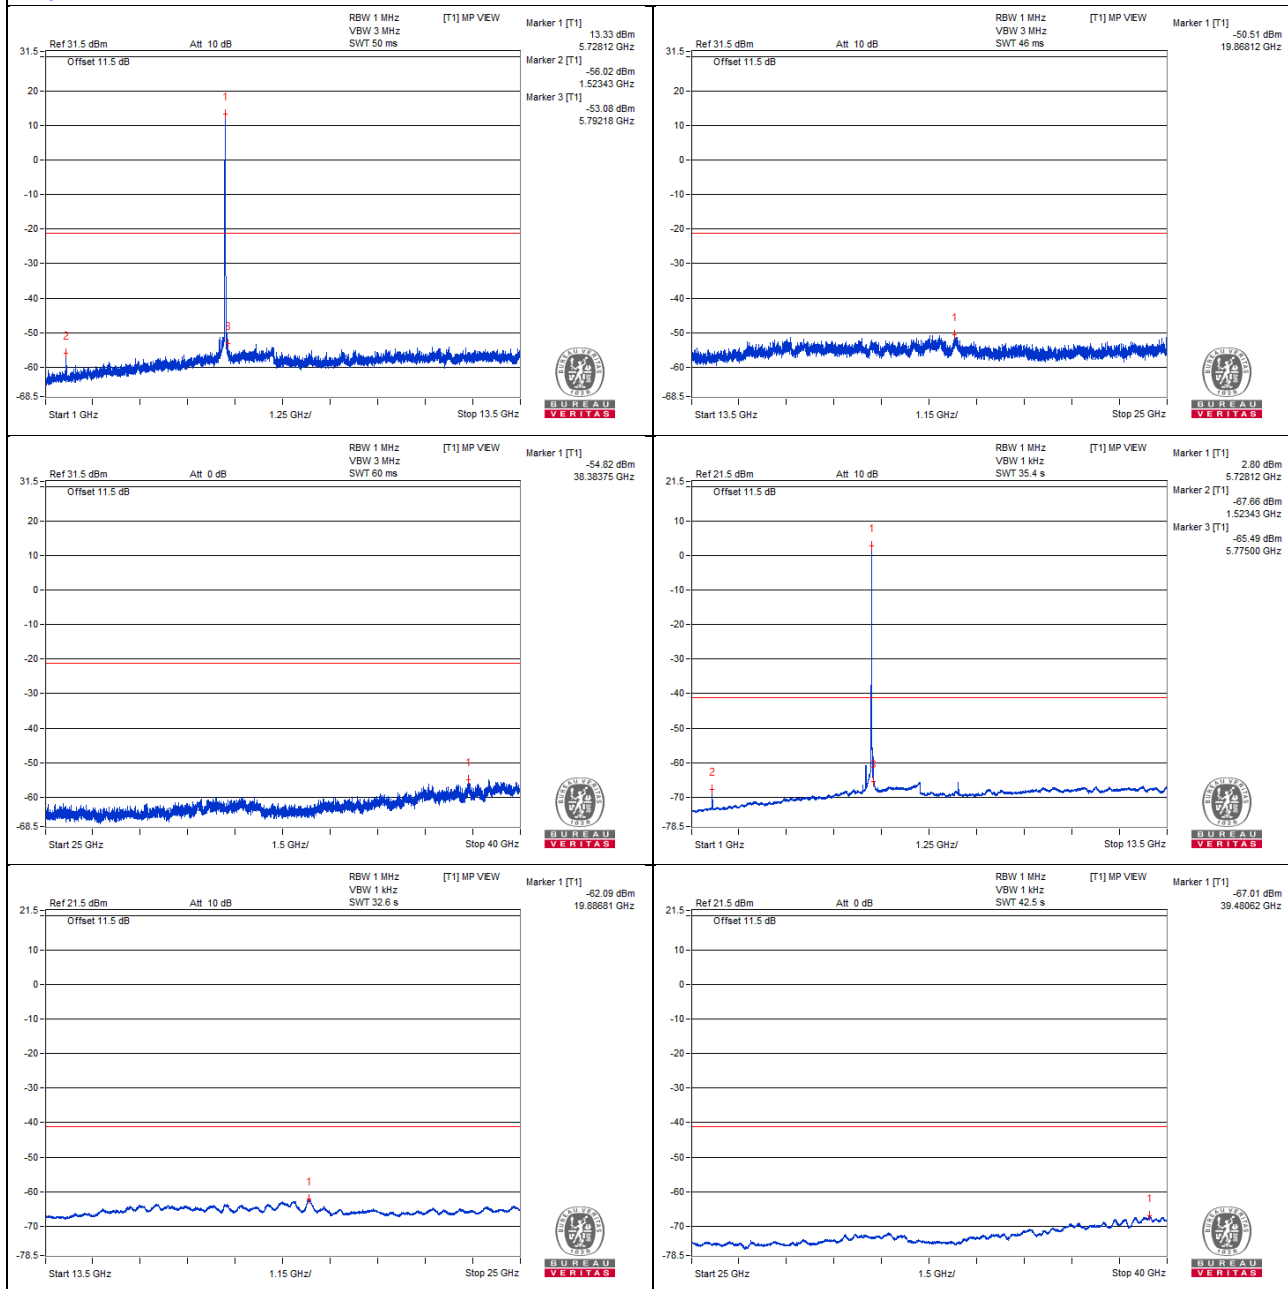

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5948.38 PK	51.3	68.2	-16.9	-53.19	-57.35	7.82	-43.96

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

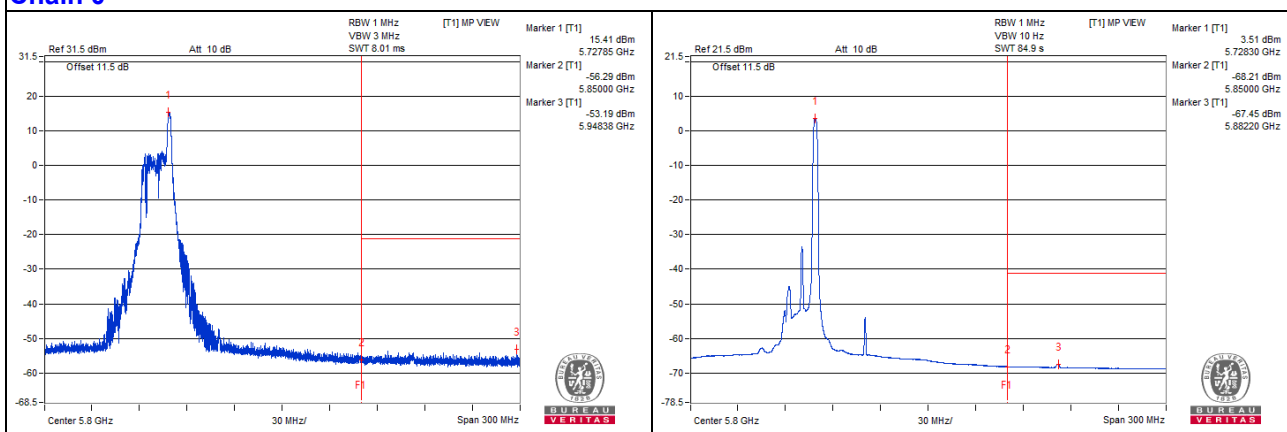

Chain 1

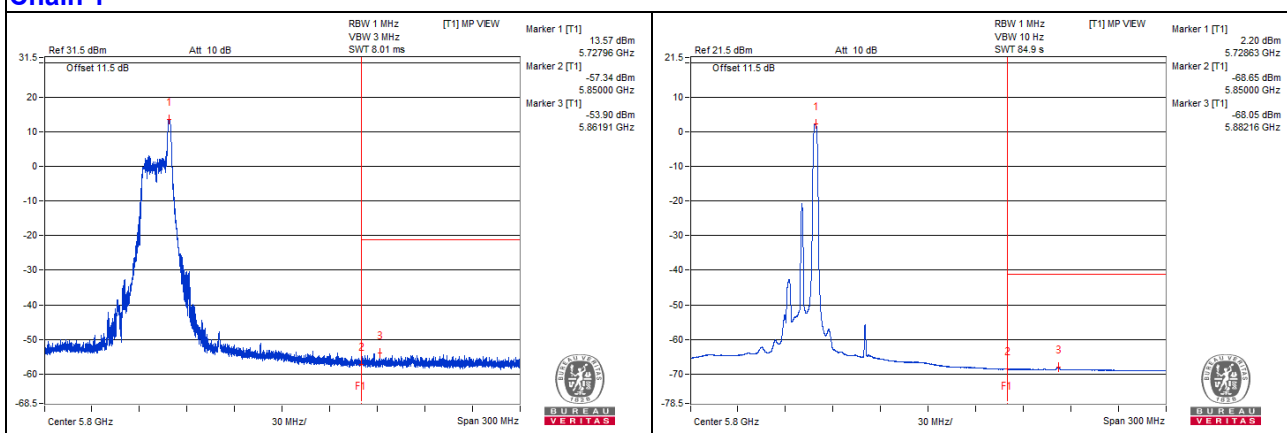

Channel 149

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	1531.25 PK	61.35	74	-12.65	-45.07	-45.12	8.17	-33.91
2	1531.25 AV	49.58	54	-4.42	-56.8	-56.92	8.17	-45.68
3	7651.56 PK	48.26	74	-25.74	-58.63	-57.77	8.17	-47
4	7656.25 AV	37.27	54	-16.73	-69.2	-69.14	8.17	-57.99
5	11490.62 PK	49.96	74	-24.04	-56.23	-56.75	8.17	-45.3
6	11496.87 AV	38.46	54	-15.54	-68.15	-67.82	8.17	-56.8
7	17237.5 PK	52.34	68.2	-15.86	-54.79	-53.5	8.17	-42.92

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

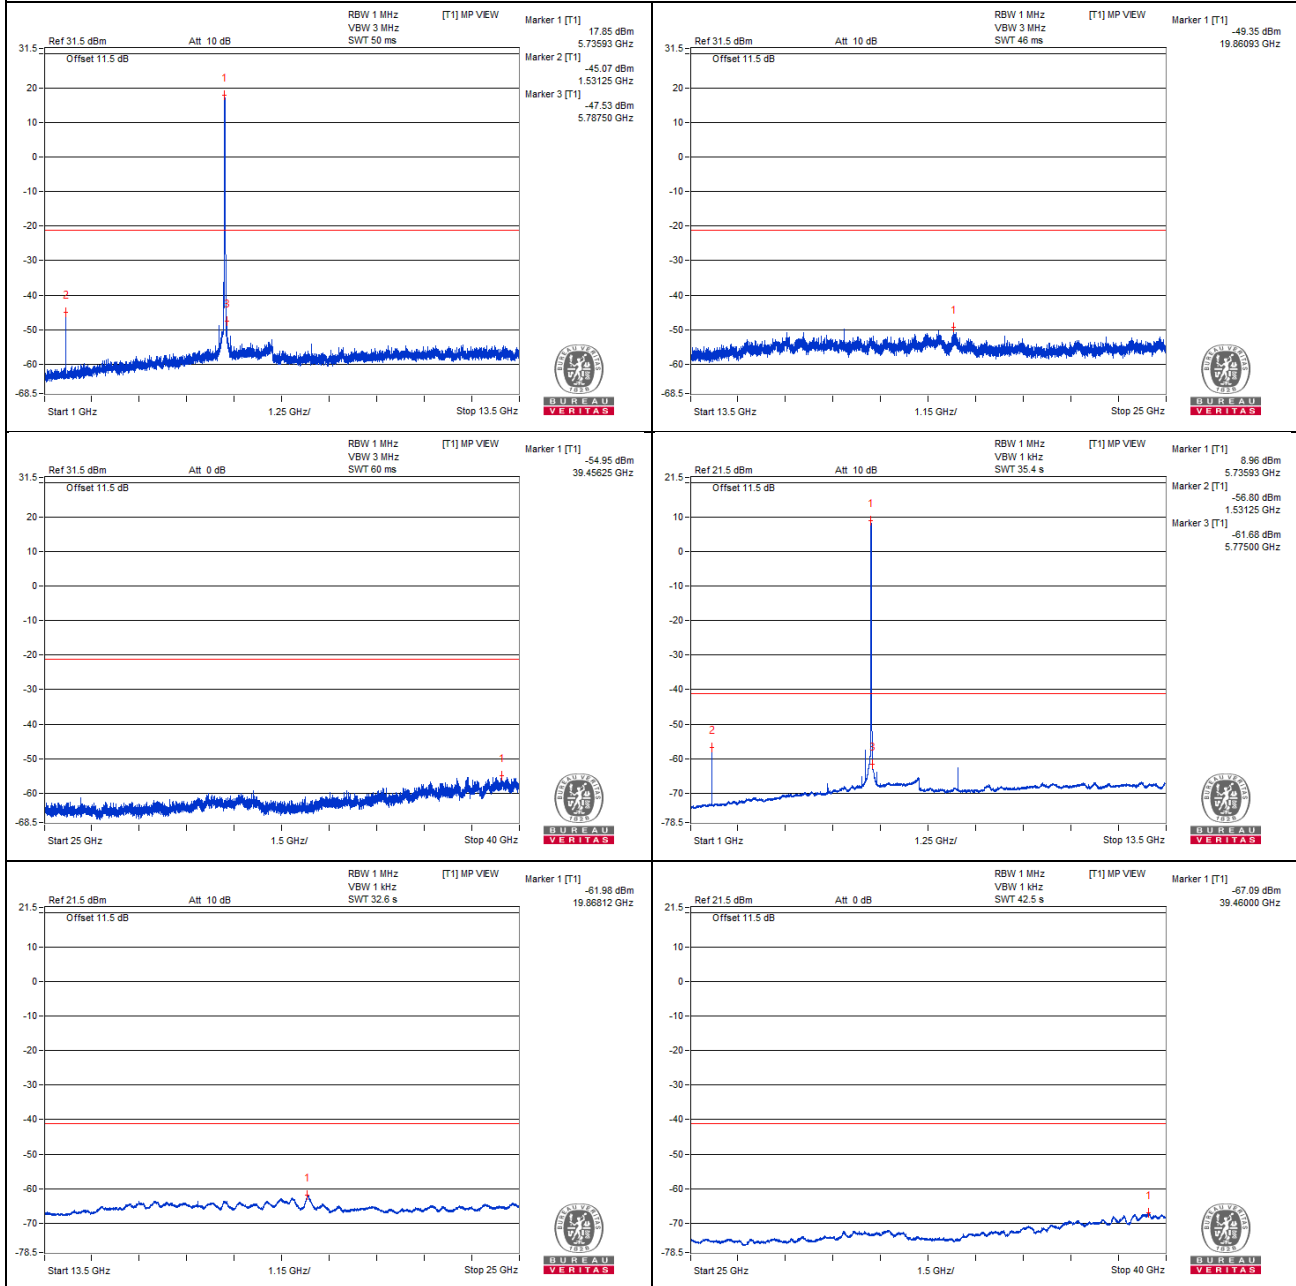


Chain 1

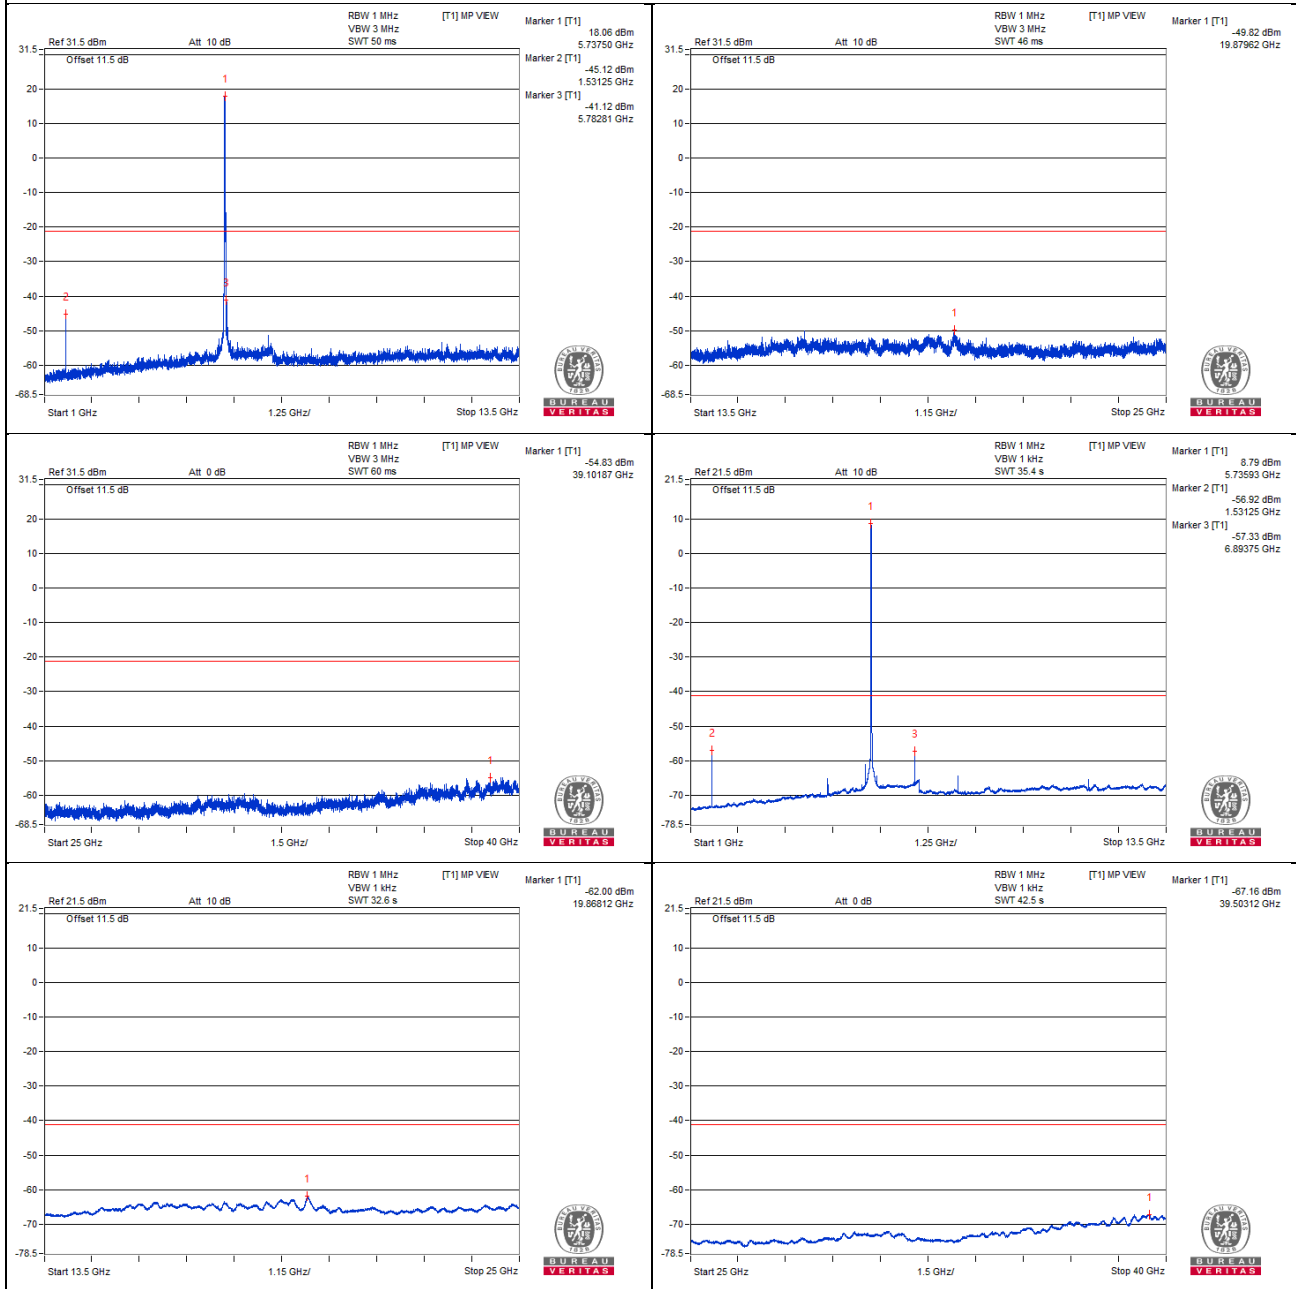


Bandedge table

Chain 0

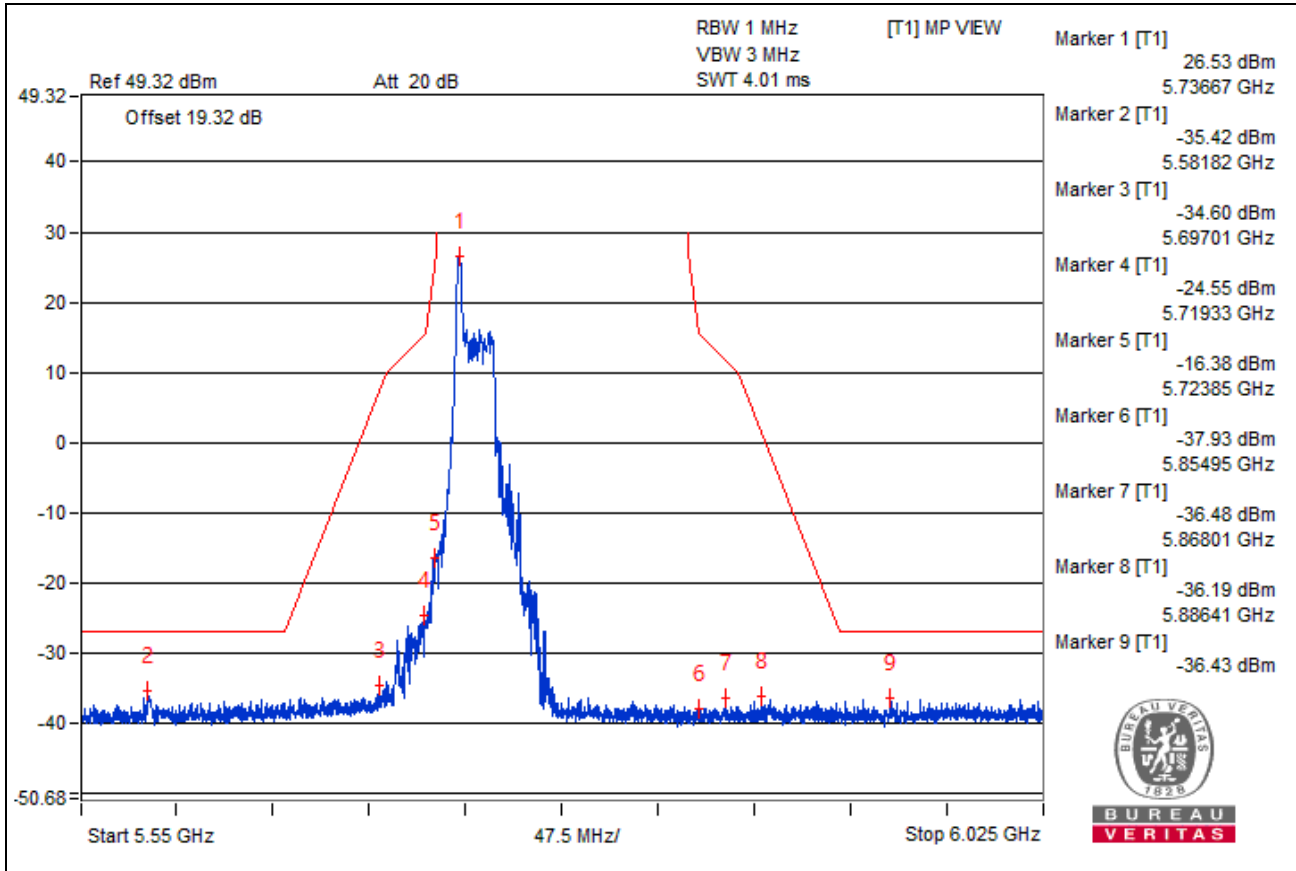

Chain 1

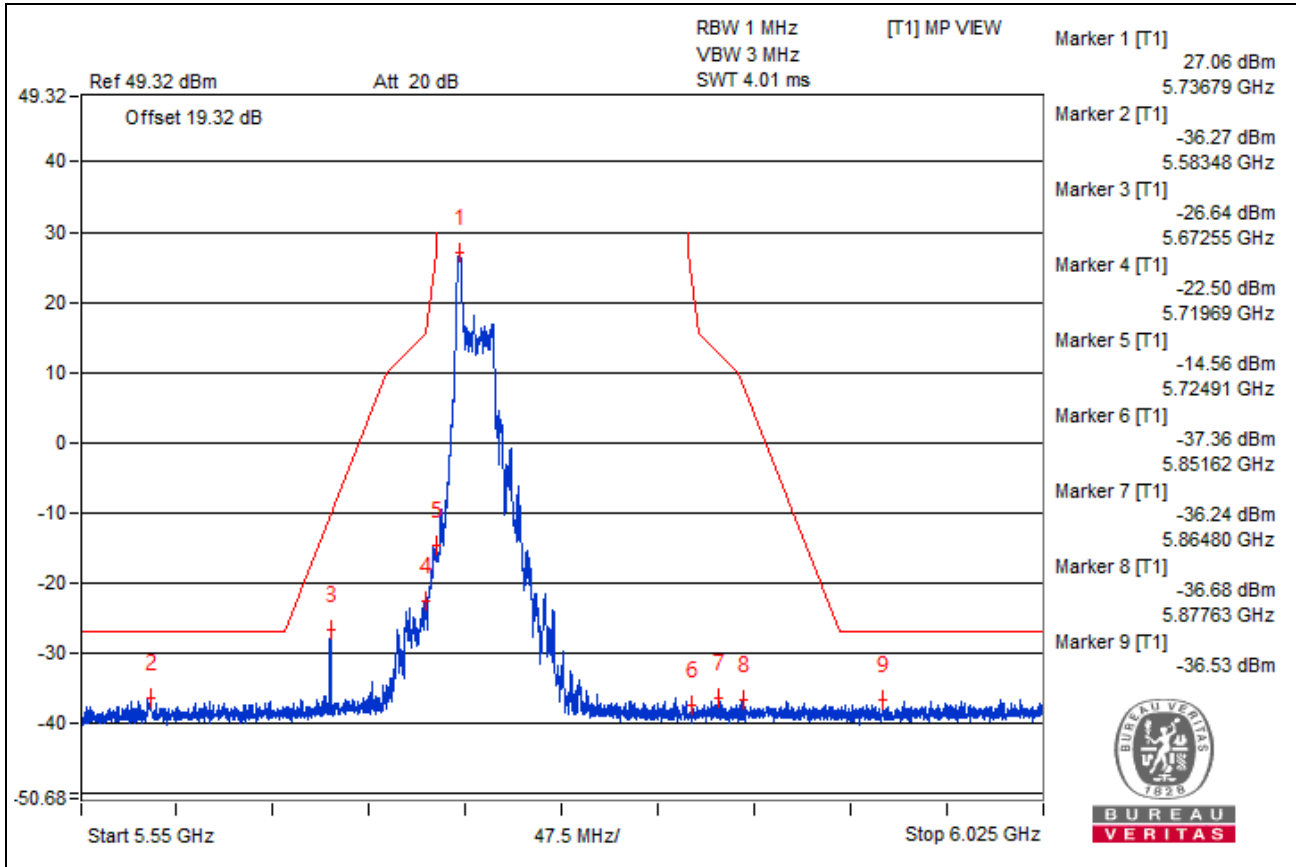

Channel 157

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	1589.06 PK	62.17	74	-11.83	-46.56	-42.78	8.17	-33.09
2	1587.5 AV	49.94	54	-4.06	-58.12	-55.32	8.17	-45.32
3	7720.31 PK	48.2	74	-25.8	-58.32	-58.17	8.17	-47.06
4	7707.81 AV	36.85	54	-17.15	-69.54	-69.64	8.17	-58.41
5	11562.5 PK	49.79	74	-24.21	-57.01	-56.31	8.17	-45.47
6	11578.12 AV	38.61	54	-15.39	-67.98	-67.68	8.17	-56.65
7	17355.37 PK	51.75	68.2	-16.45	-56.18	-53.58	8.17	-43.51

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

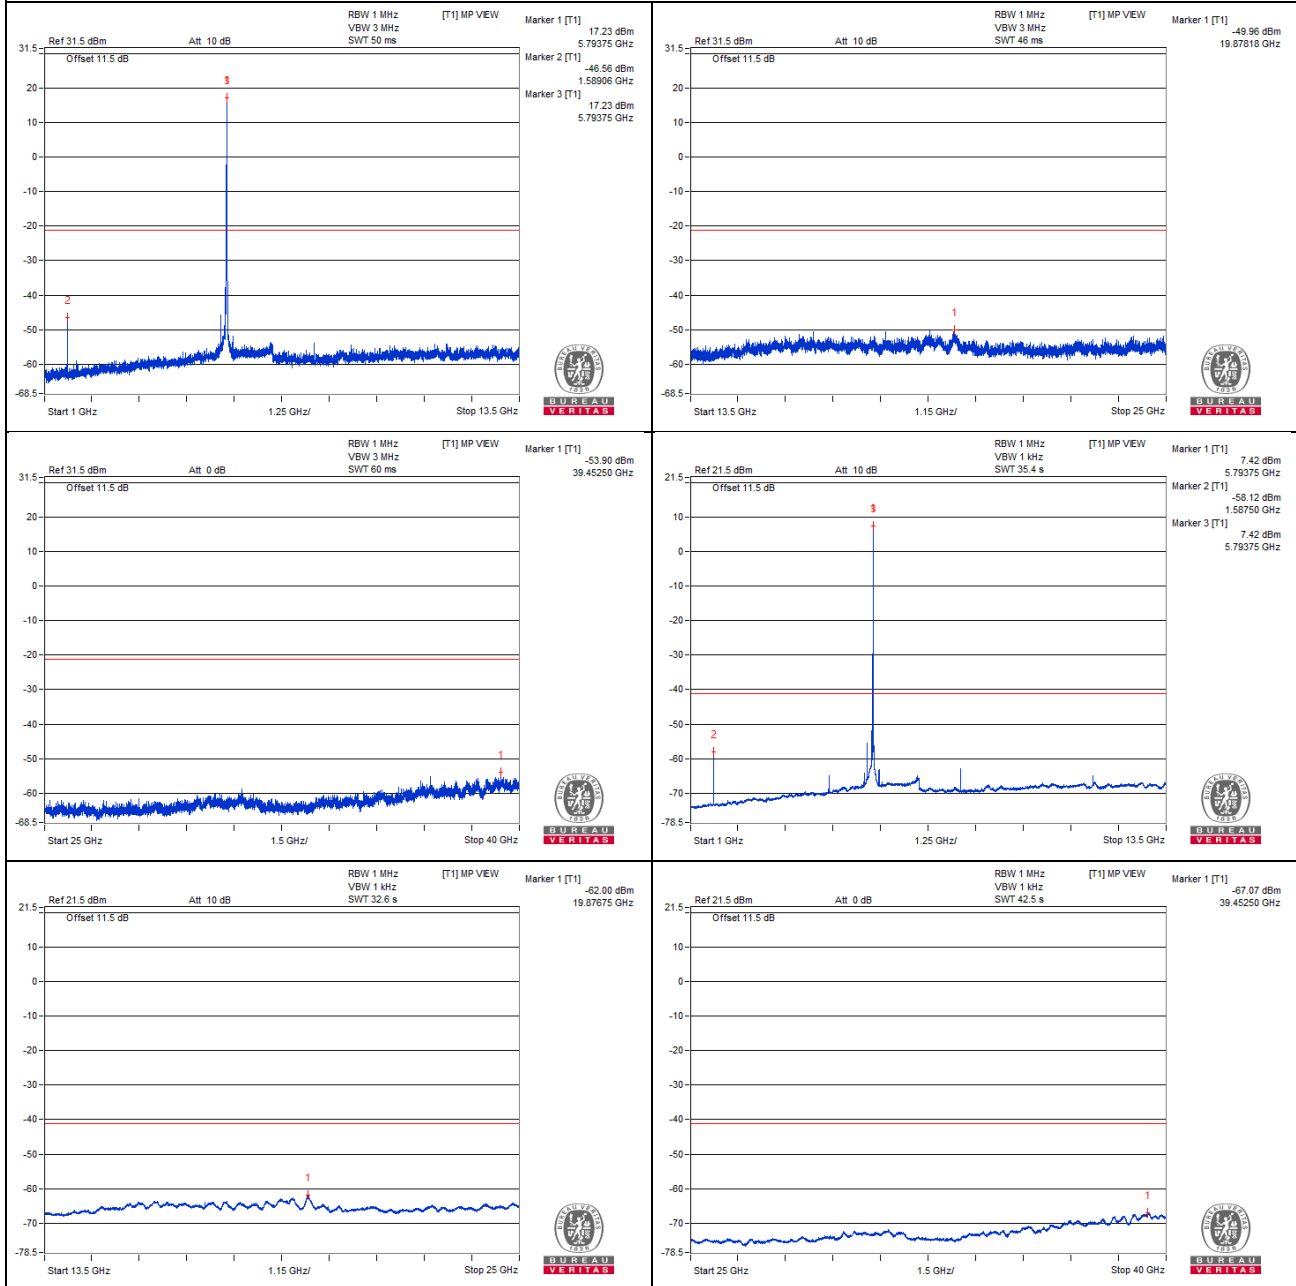


Chain 1

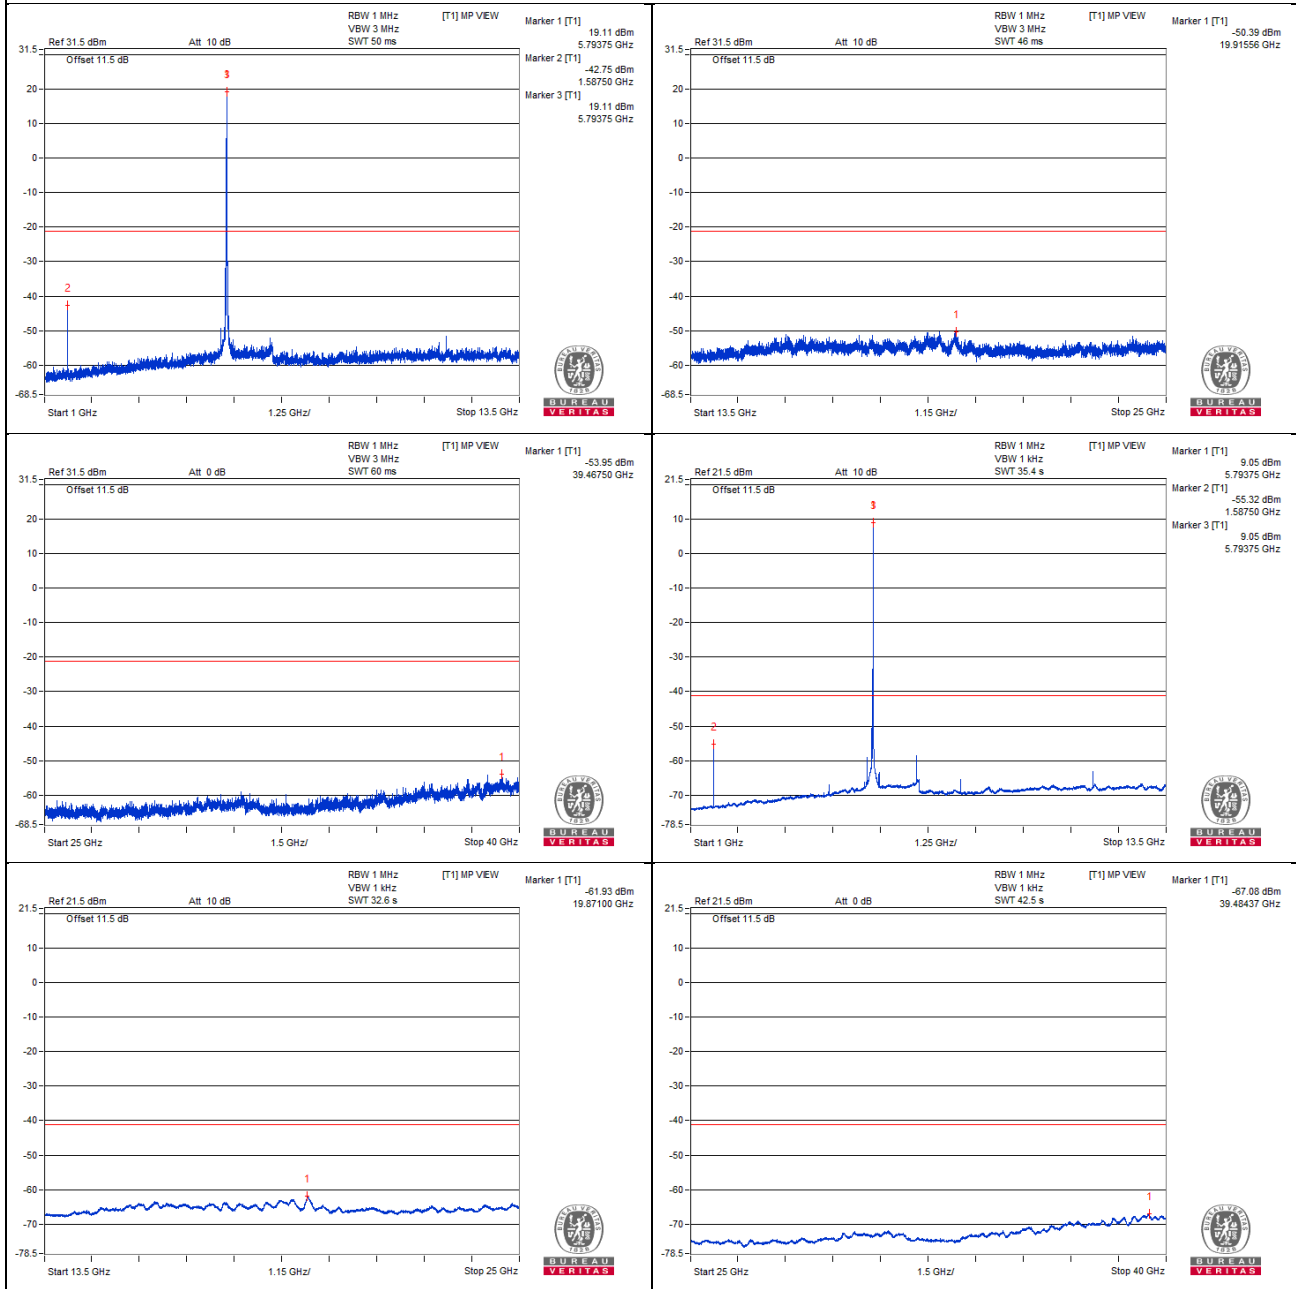


Bandedge table

Chain 0

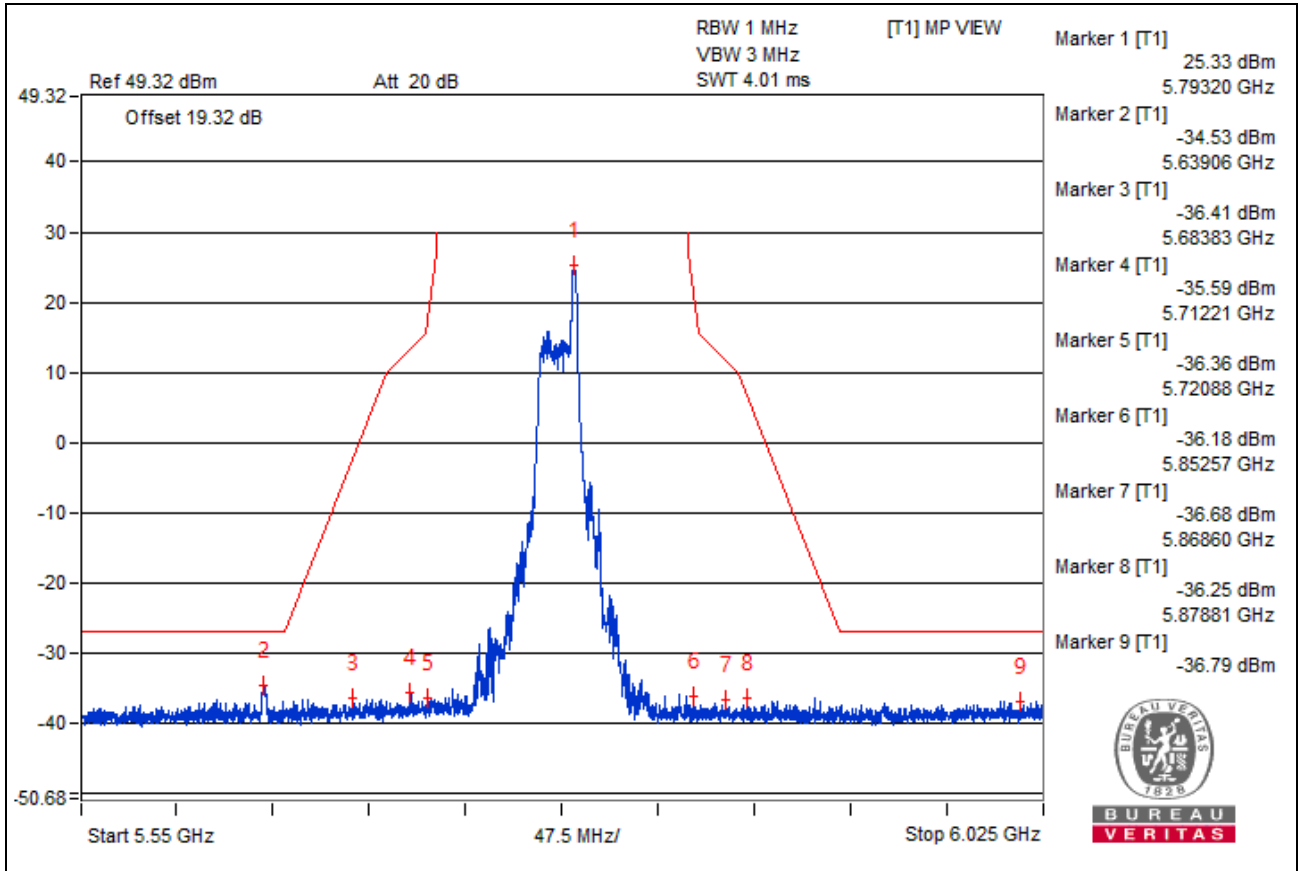

Chain 1

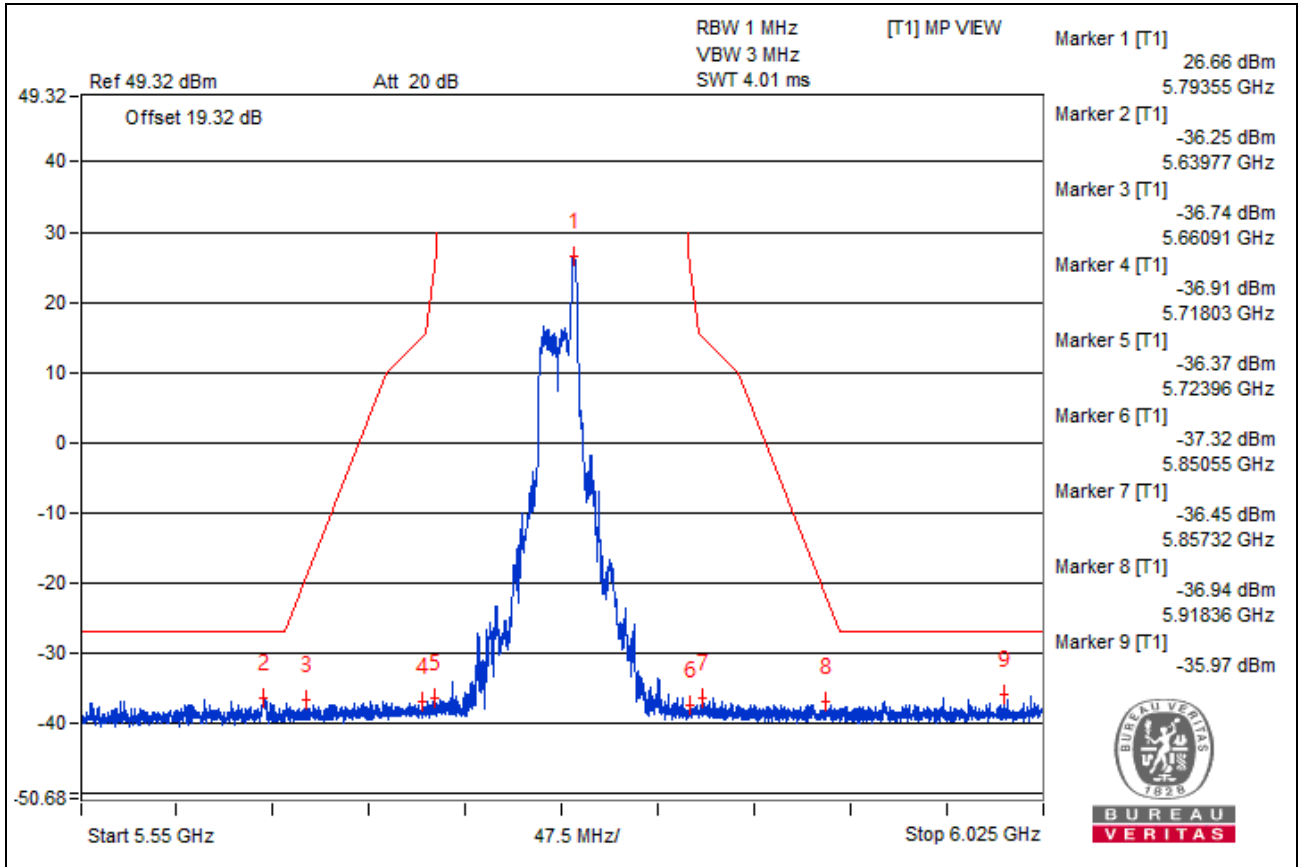

Channel 165

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	1628.12 PK	61.33	68.2	-6.87	-46.73	-43.93	8.17	-33.93
2	7775 PK	49.7	68.2	-18.5	-56.67	-56.81	8.17	-45.56
3	11640.62 PK	51.08	74	-22.92	-55.77	-54.99	8.17	-44.18
4	11645.31 AV	39.38	54	-14.62	-67.08	-67.04	8.17	-55.88
5	17479 PK	53.24	68.2	-14.96	-53.56	-52.86	8.17	-42.02

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

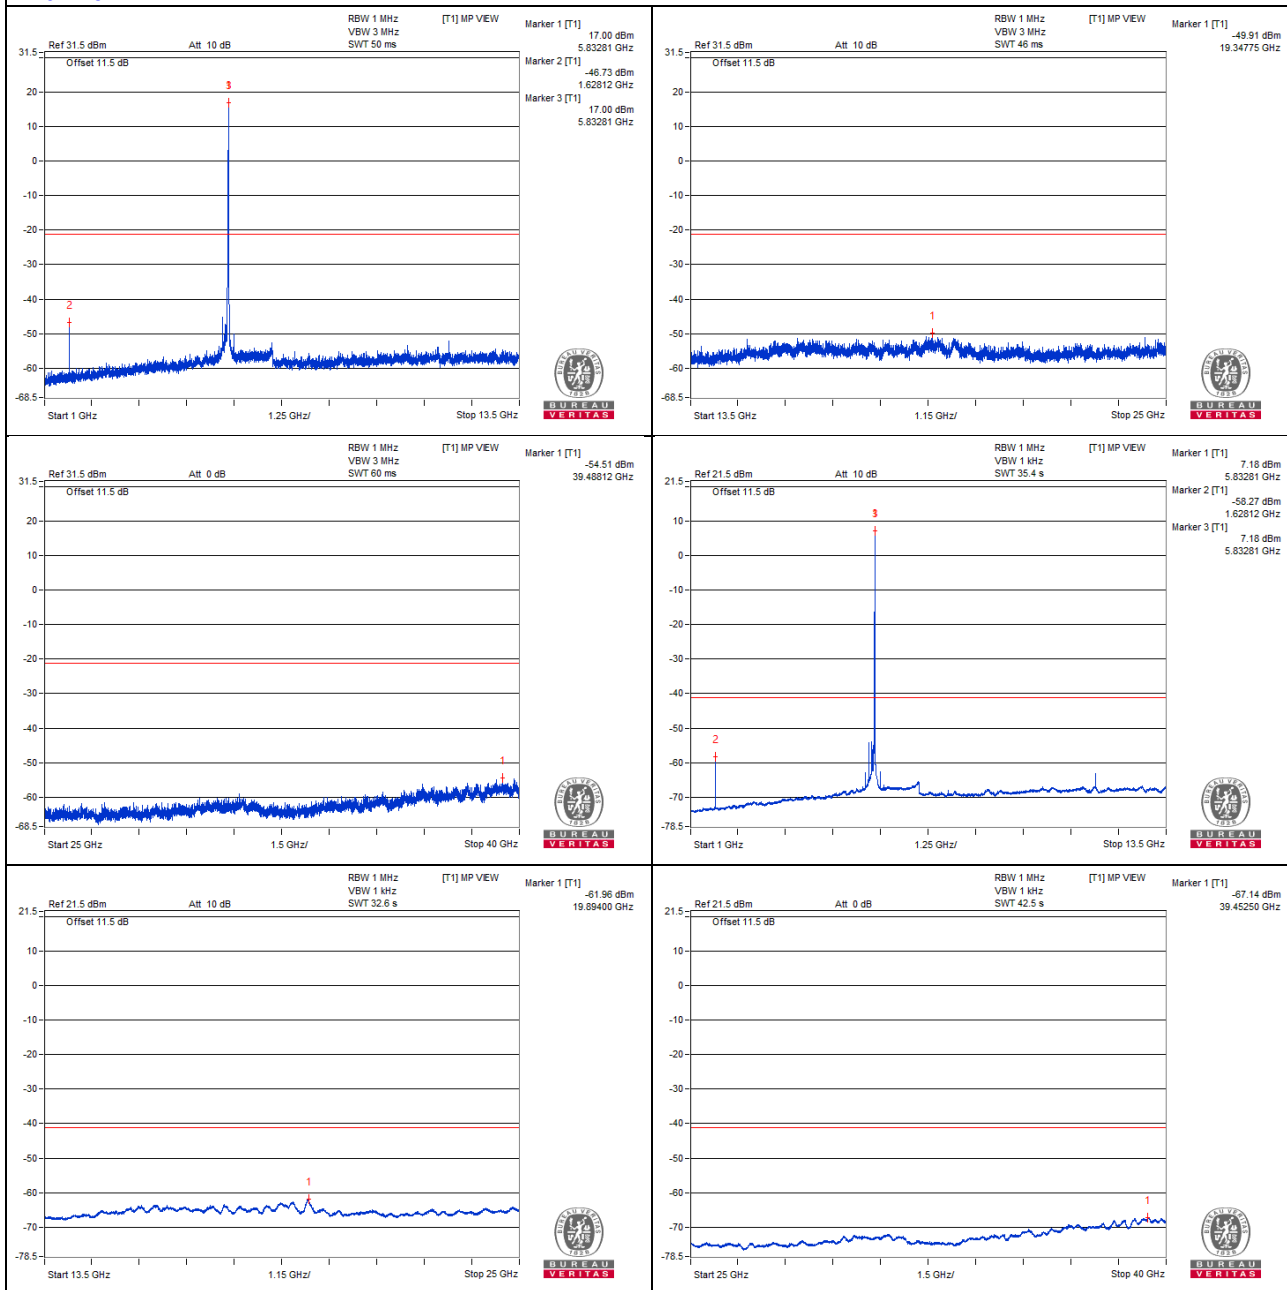


Chain 1

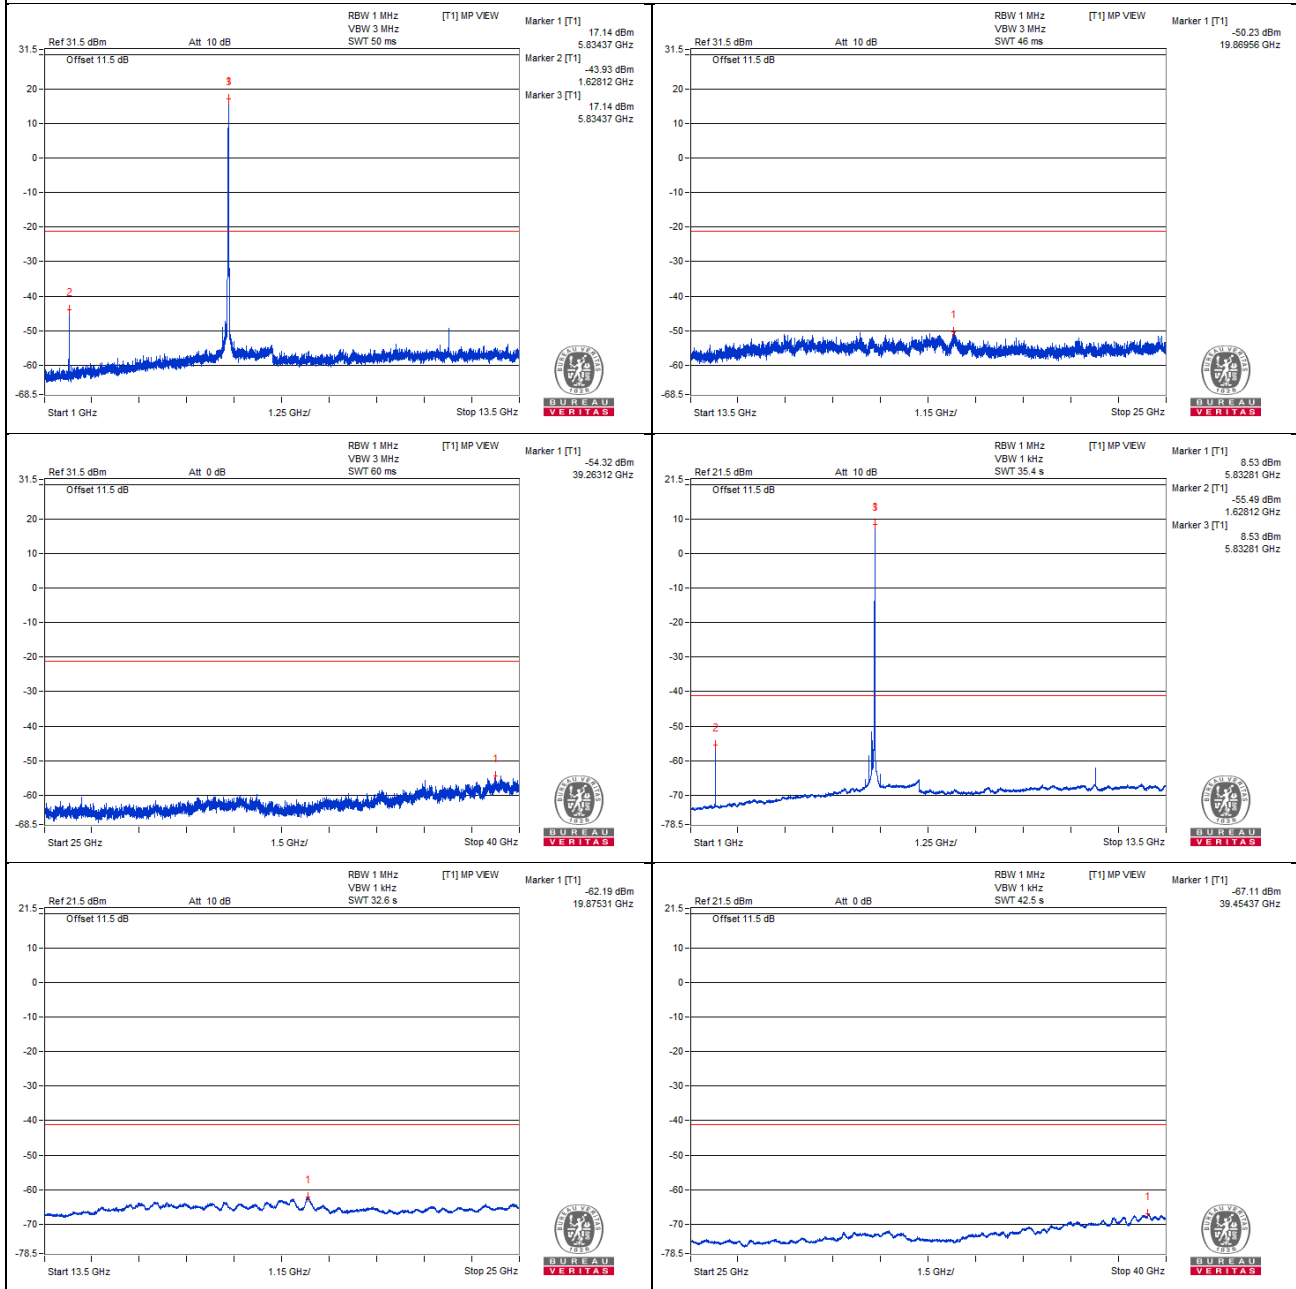


Bandedge table

Chain 0

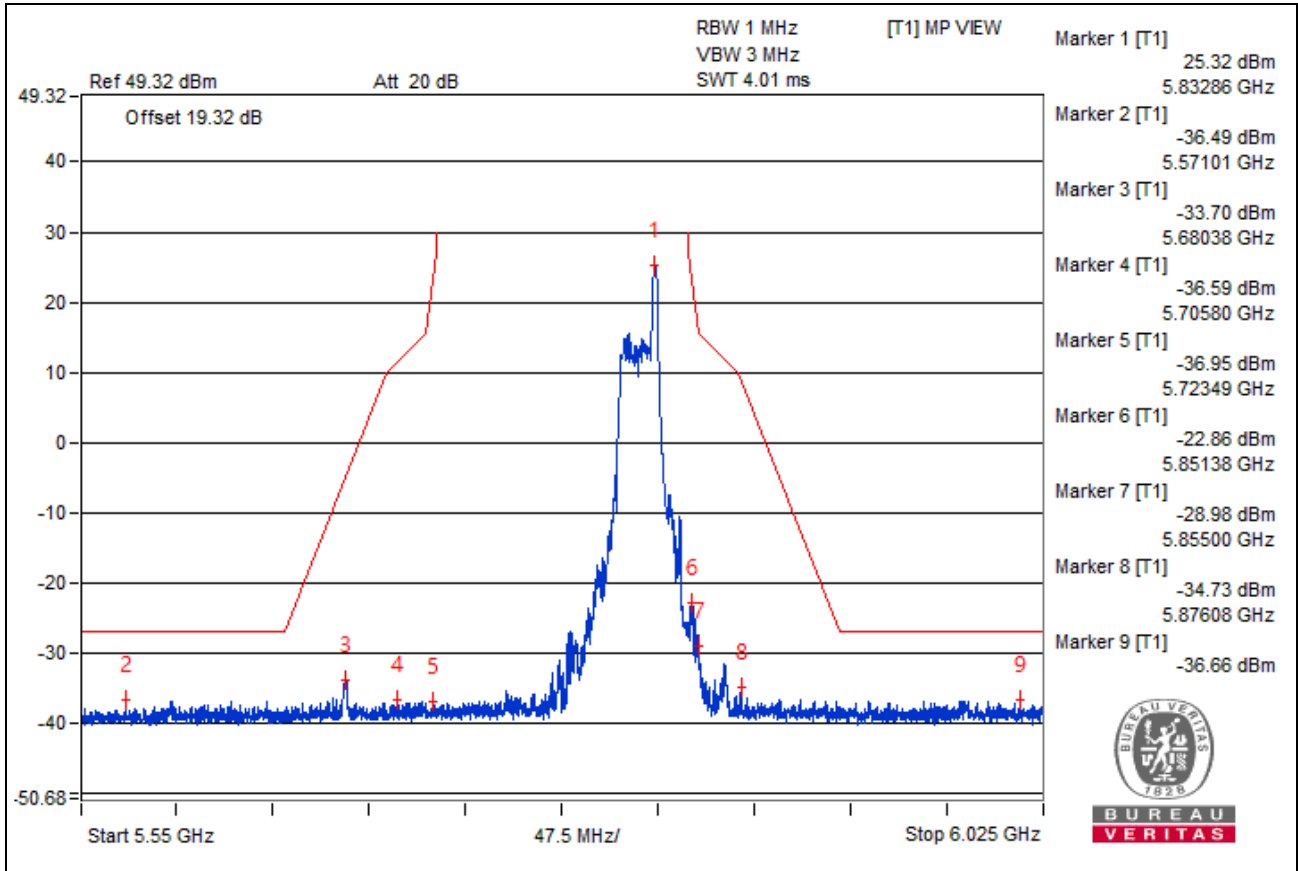

Chain 1

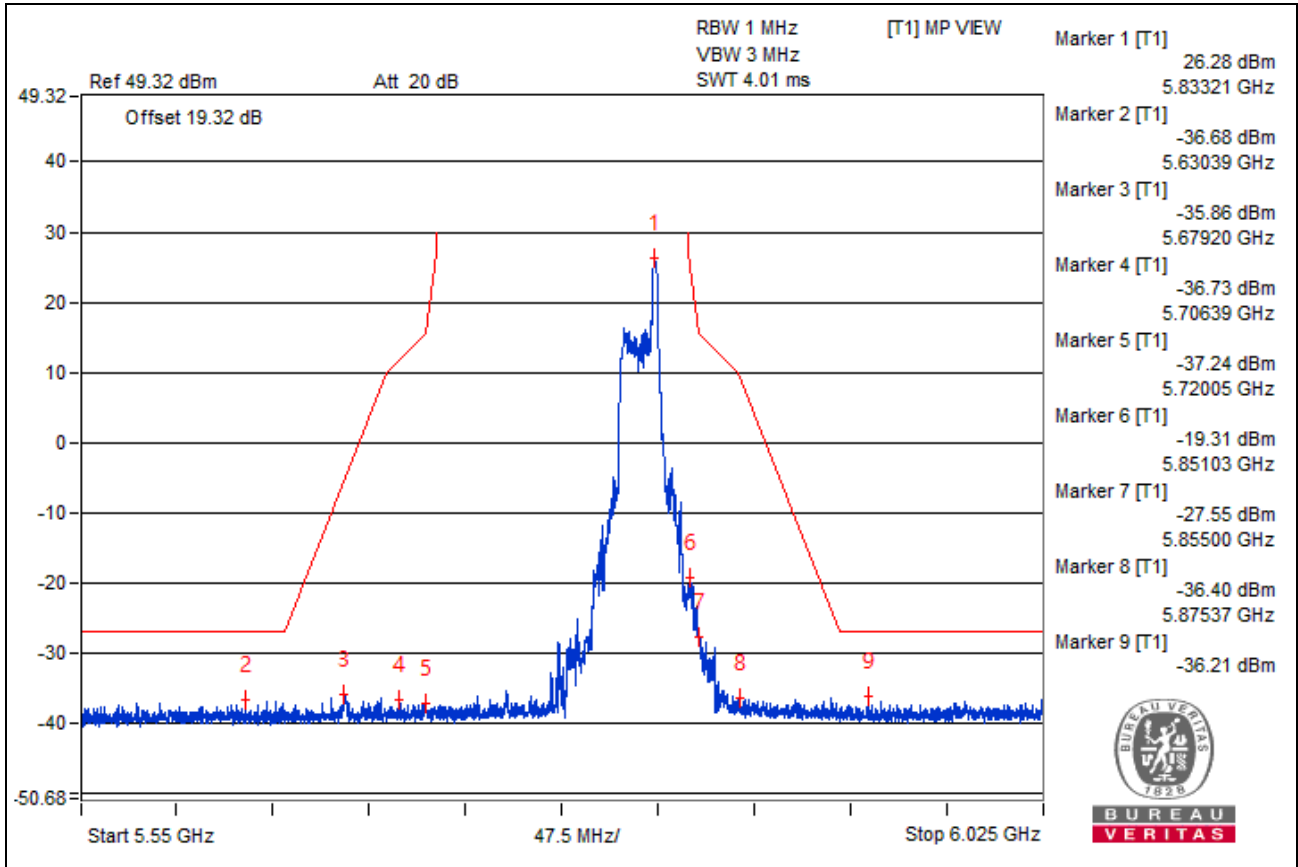

RU52

Channel 36


Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	1009.37 PK	43.84	74	-30.16	-62.81	-62.4	8.17	-51.42
2	1004.68 AV	32.51	54	-21.49	-74.07	-73.8	8.17	-62.75
3	6906.25 PK	53.66	68.2	-14.54	-54.51	-51.54	8.17	-41.6
4	10350 PK	50.67	68.2	-17.53	-55.11	-56.55	8.17	-44.59
5	15541.25 PK	52.62	74	-21.38	-54.01	-53.64	8.17	-42.64
6	15547 AV	42.02	54	-11.98	-64.61	-64.24	8.17	-53.24


Note :

1. Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8
d = measurement distance in 3 meters.
2. # : Non-restricted frequency, no limit for average emission.

Chain 0

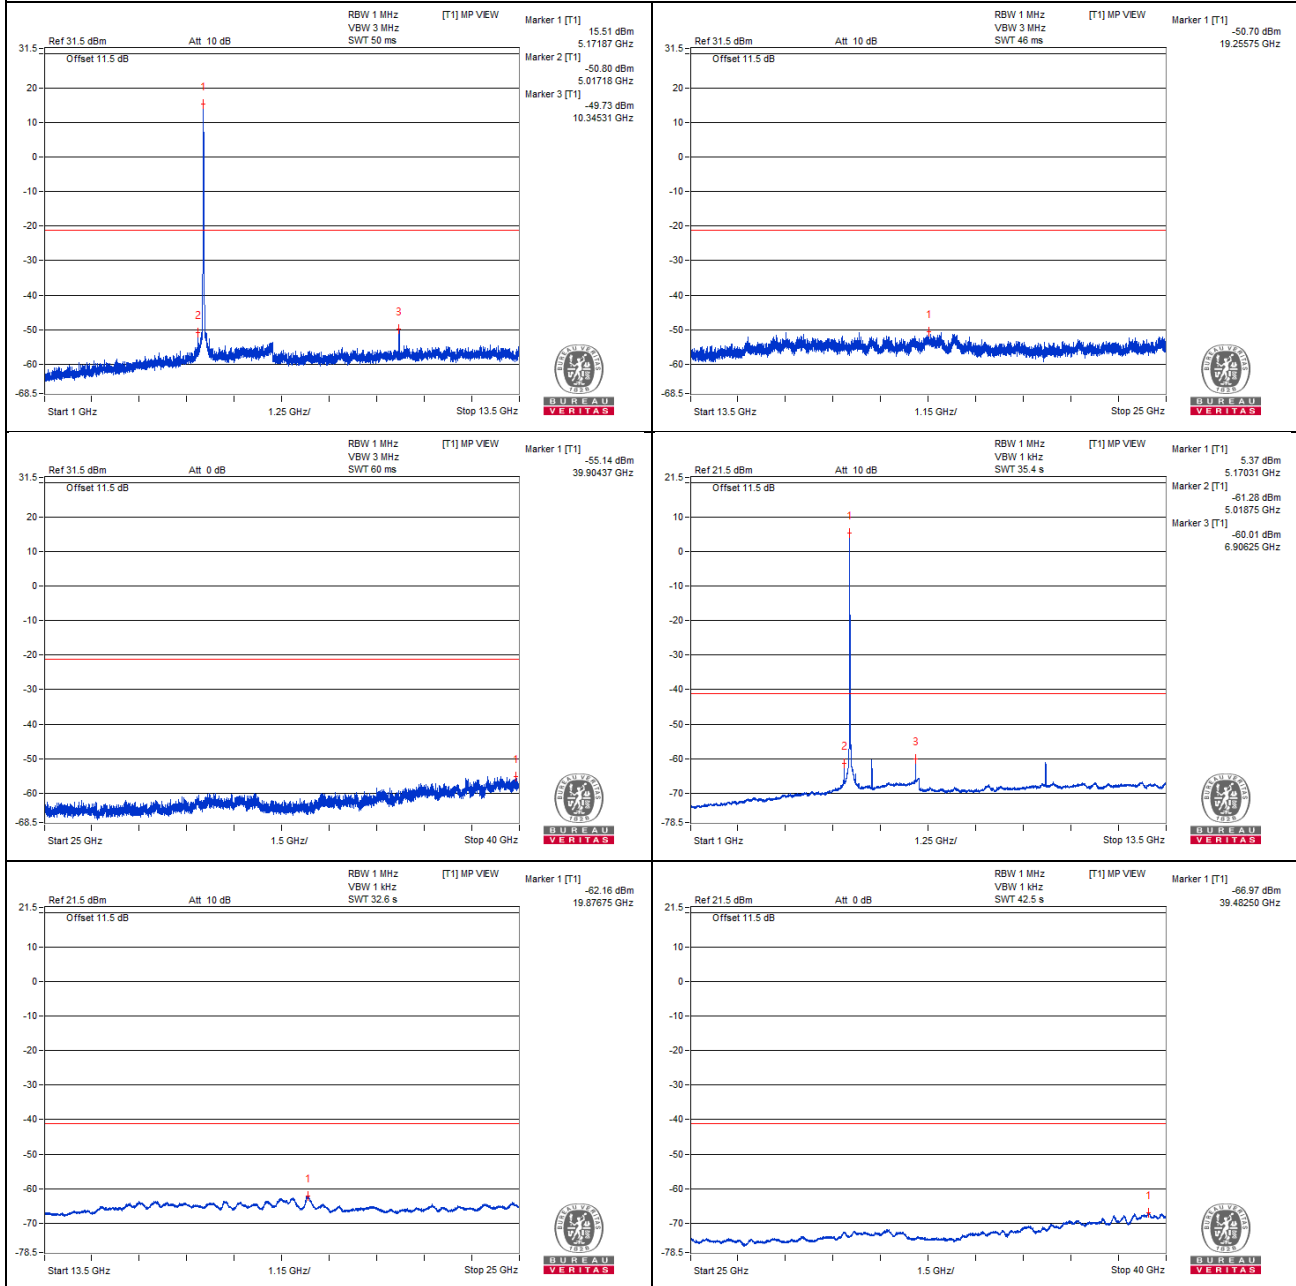

Chain 1

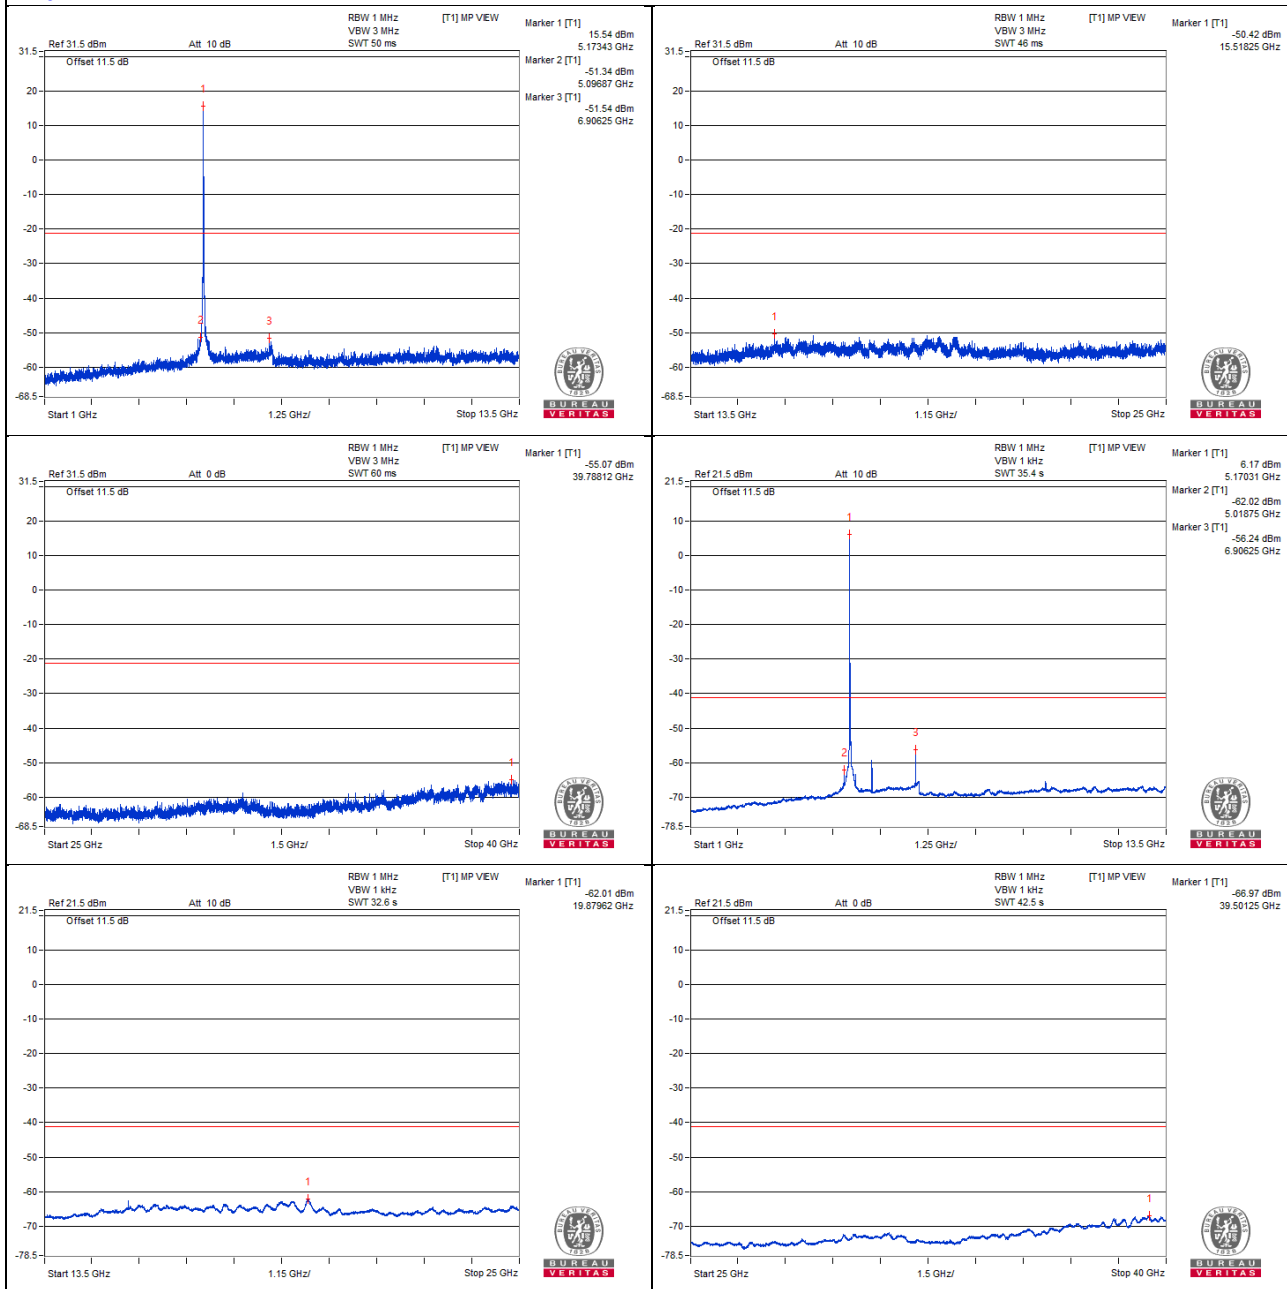

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5149.57 PK	72.34	74	-1.66	-32.47	-32.12	6.36	-22.92
2	5143.12 AV	44.03	54	-9.97	-61.93	-59.58	6.36	-51.23

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

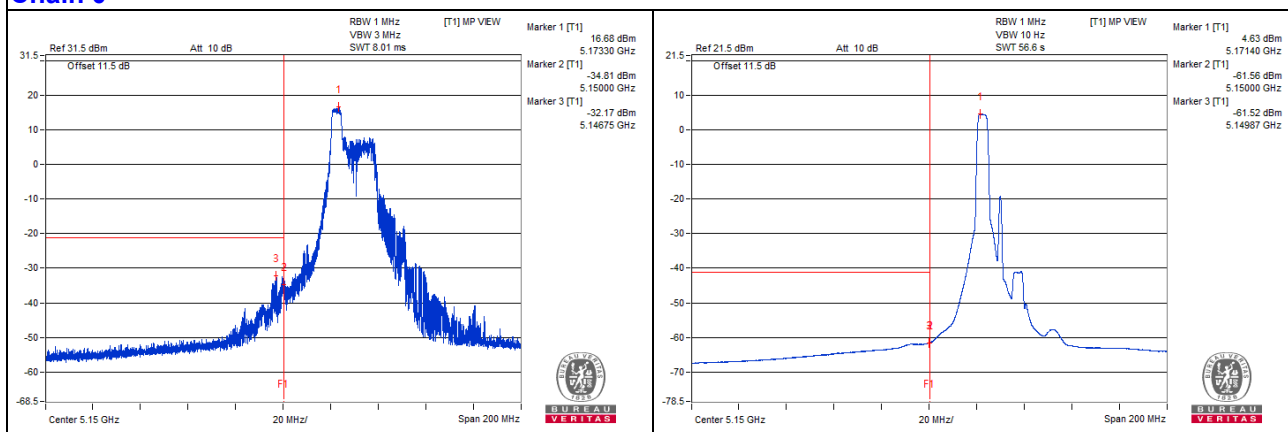

Chain 1

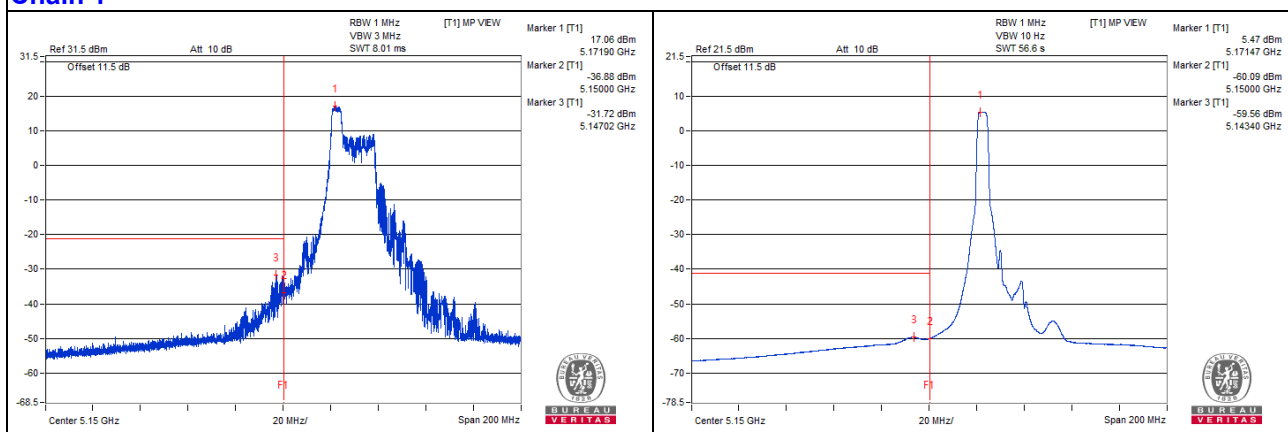

Channel 40


Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	1000 PK	51	74	-23	-74.5	-52.46	8.17	-44.26
2	1000 AV	33.85	54	-20.15	-72.67	-72.51	8.17	-61.41
3	6932.81 PK	54.44	68.2	-13.76	-53.49	-50.89	8.17	-40.82
4	10409.37 PK	49.86	68.2	-18.34	-56.57	-56.59	8.17	-45.4
5	15595.87 PK	52.25	74	-21.75	-54.65	-53.78	8.17	-43.01
6	15590.12 AV	41.46	54	-12.54	-64.96	-65.01	8.17	-53.8


Note :

1. Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8
d = measurement distance in 3 meters.
2. # : Non-restricted frequency, no limit for average emission.

Chain 0

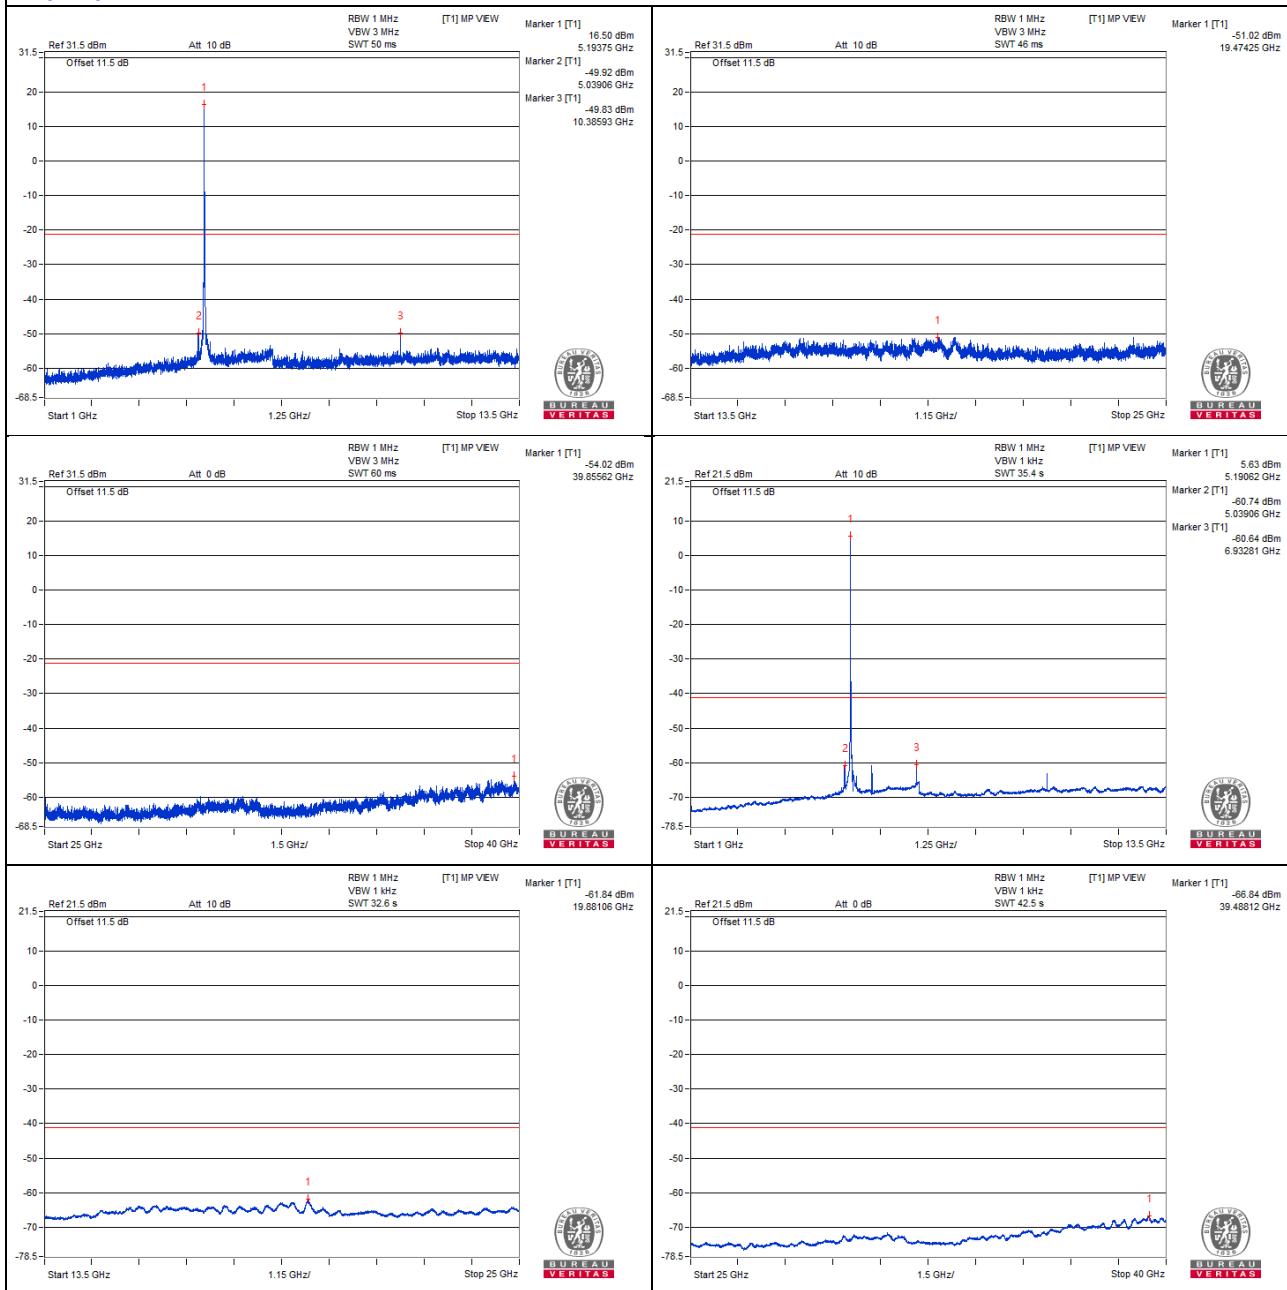

Chain 1

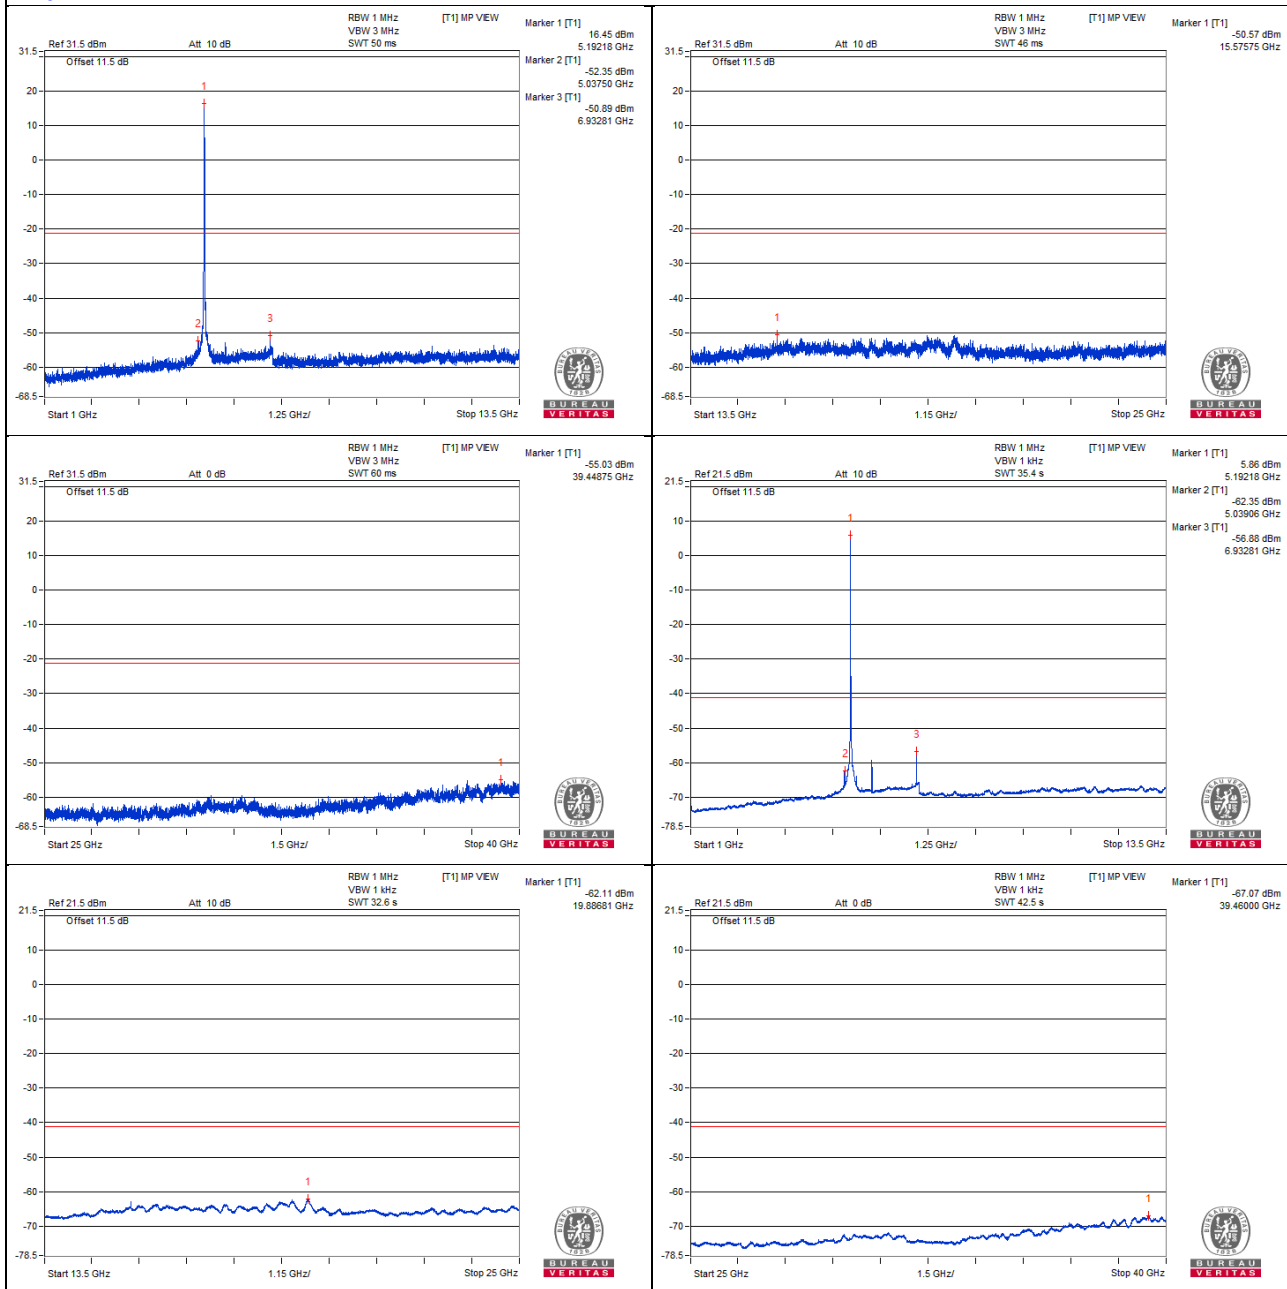

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5143.3 PK	59.02	74	-14.98	-43.7	-49.09	6.36	-36.24
2	5147.67 AV	42.01	54	-11.99	-63.59	-61.83	6.36	-53.25

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

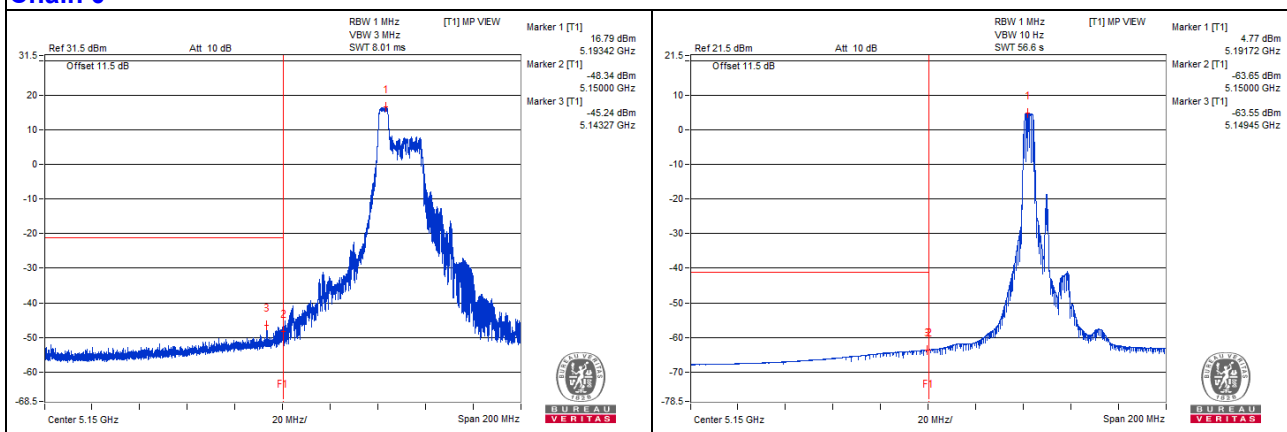

Chain 1

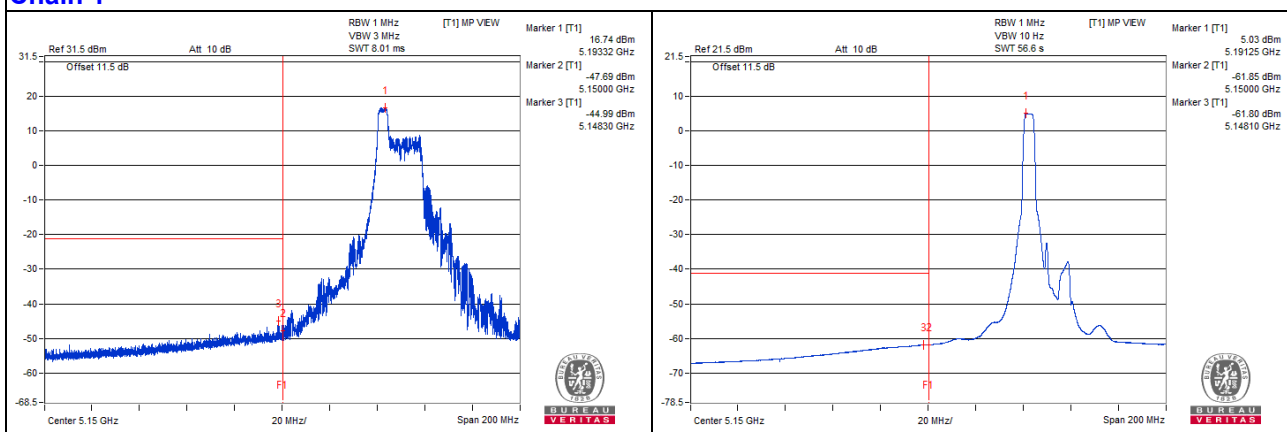

Channel 48


Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	1042.18 PK	65.57	74	-8.43	-40.47	-41.32	8.17	-29.69
2	1042.18 AV	51.89	54	-2.11	-54.47	-54.64	8.17	-43.37
3	6985.93 PK	54.36	68.2	-13.84	-52.37	-51.81	8.17	-40.9
4	10478.12 PK	50.18	68.2	-18.02	-56.95	-55.67	8.17	-45.08
5	15725.25 PK	52.89	74	-21.11	-52.55	-54.85	8.17	-42.37
6	15726.68 AV	41.81	54	-12.19	-64.73	-64.54	8.17	-53.45


Note :

1. Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8
d = measurement distance in 3 meters.
2. # : Non-restricted frequency, no limit for average emission.

Chain 0

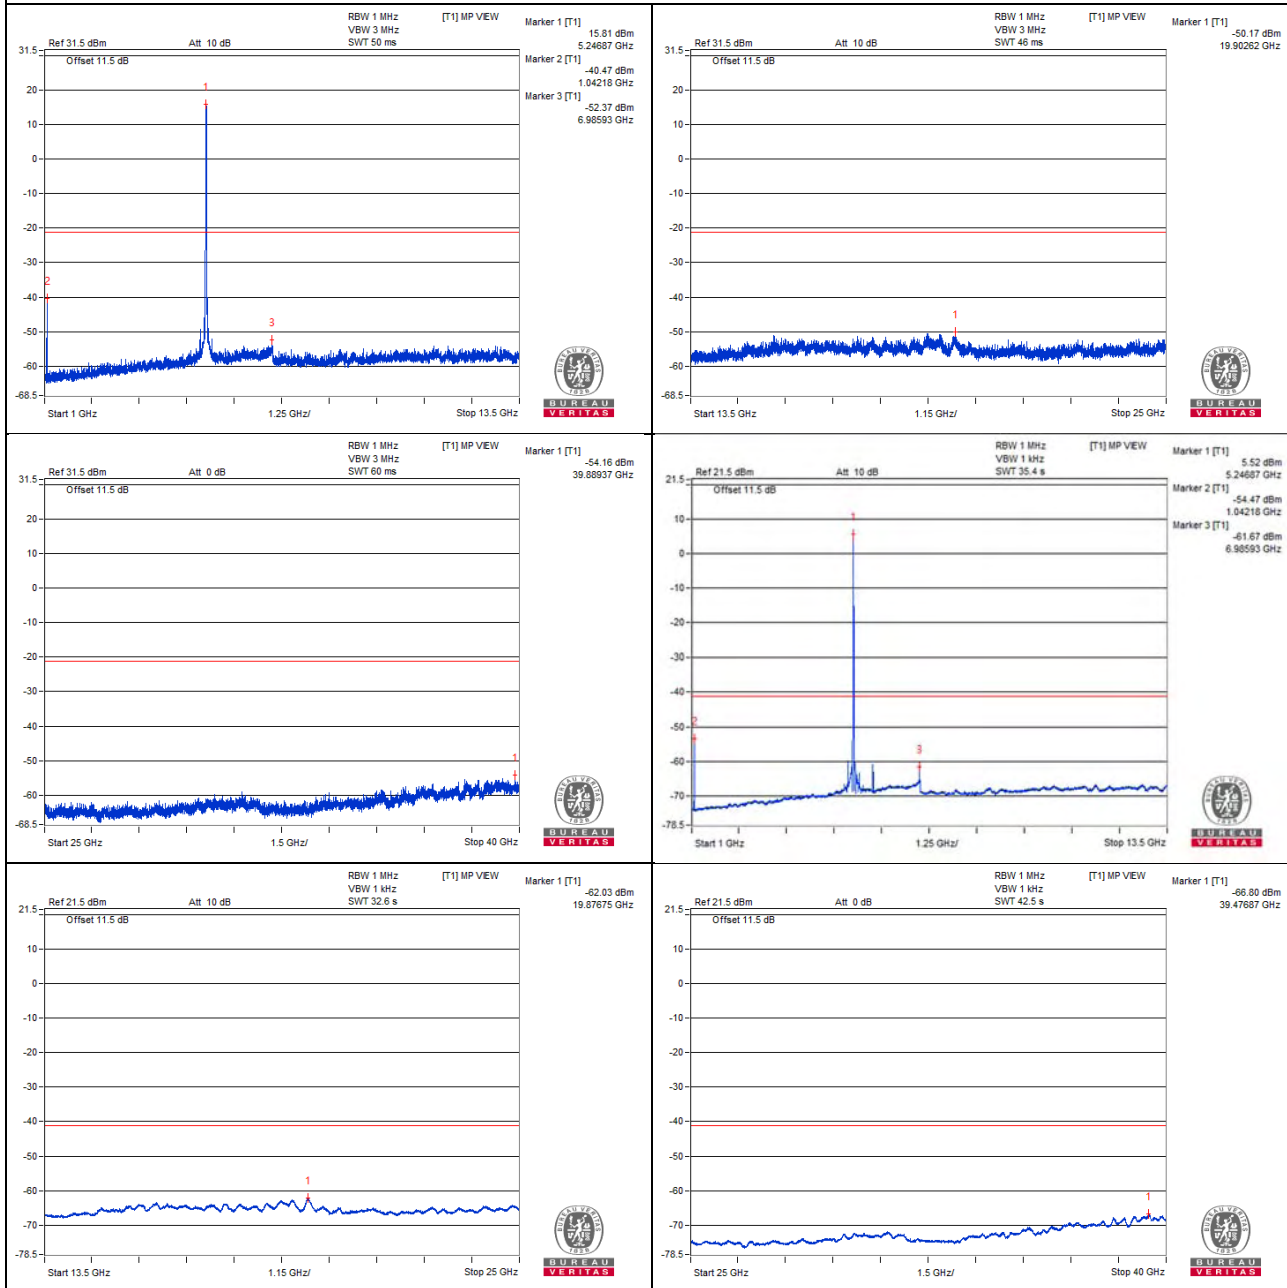

Chain 1

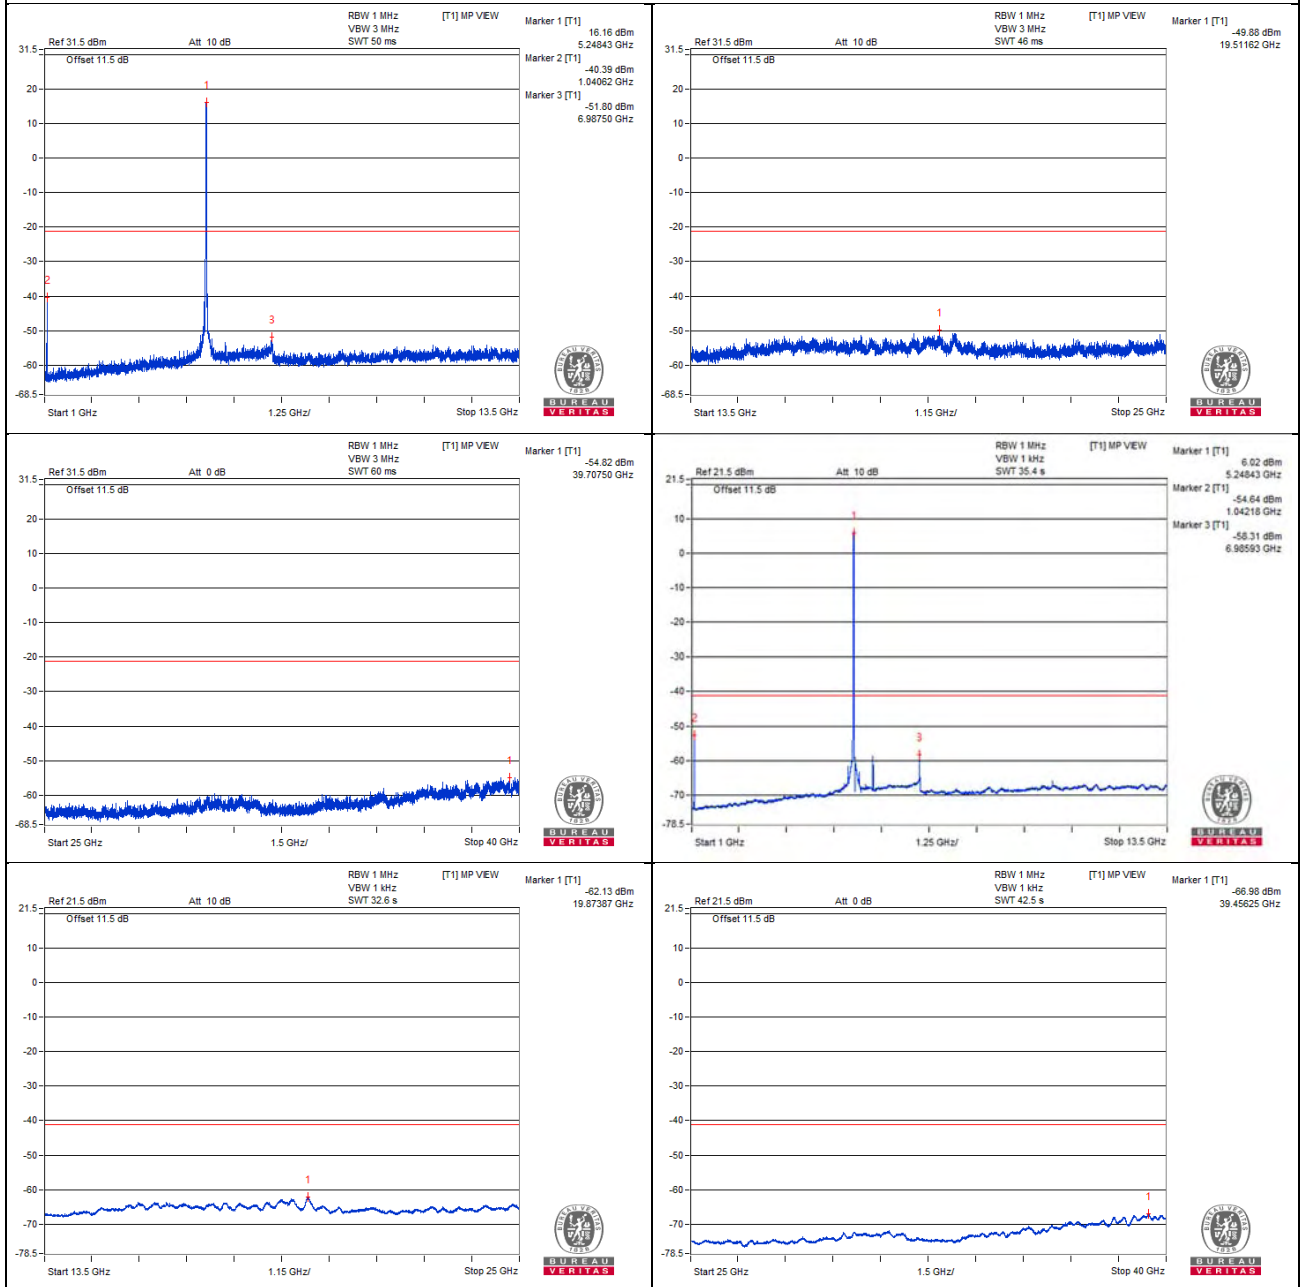

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5092.95 PK	55.81	74	-18.19	-47.6	-50.53	6.36	-39.45
2	5094.62 AV	43.55	54	-10.45	-60.29	-62.04	6.36	-51.71

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

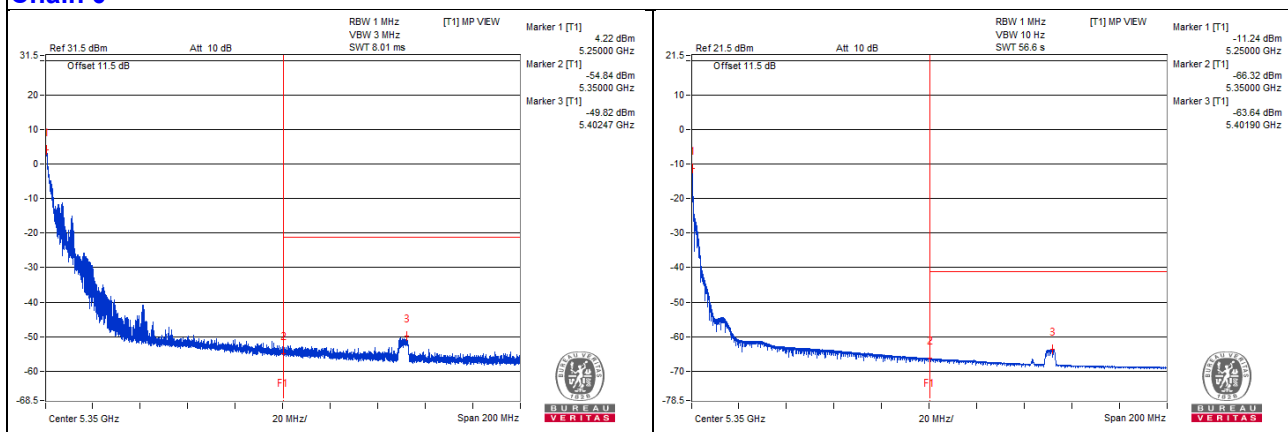

Chain 1

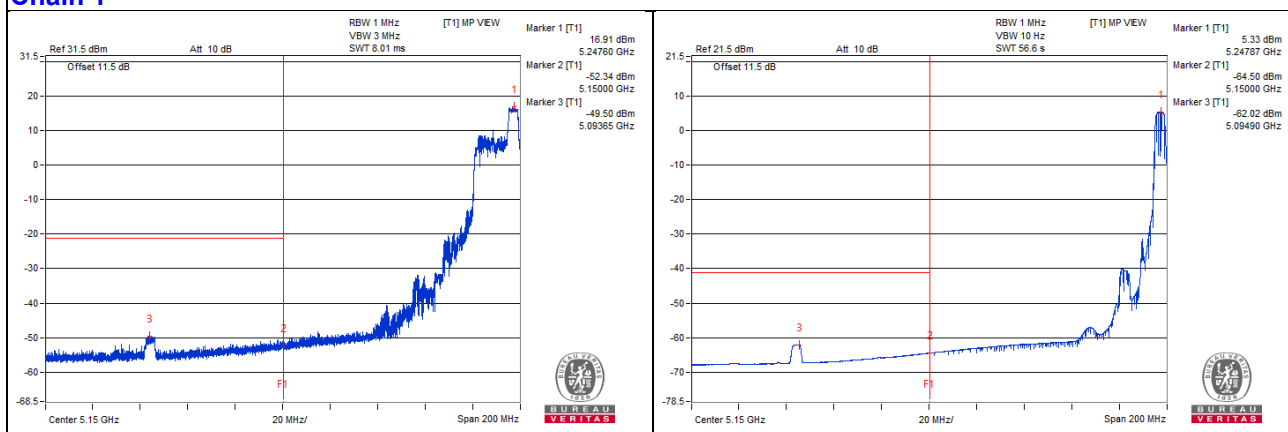

Channel 52


Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	1045.31 PK	64.13	74	-9.87	-41.7	-43.01	8.17	-31.13
2	1046.87 AV	52.73	54	-1.27	-54.28	-53.21	8.17	-42.53
3	7014.06 PK	52.17	68.2	-16.03	-55.48	-53.32	8.17	-43.09
4	10517.18 PK	49.89	68.2	-18.31	-57.09	-56.07	8.17	-45.37
5	15774.12 PK	53.92	74	-20.08	-51.81	-53.37	8.17	-41.34
6	15782.75 AV	42.39	54	-11.61	-64.11	-64	8.17	-52.87


Note :

1. Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8
d = measurement distance in 3 meters.
2. # : Non-restricted frequency, no limit for average emission.

Chain 0

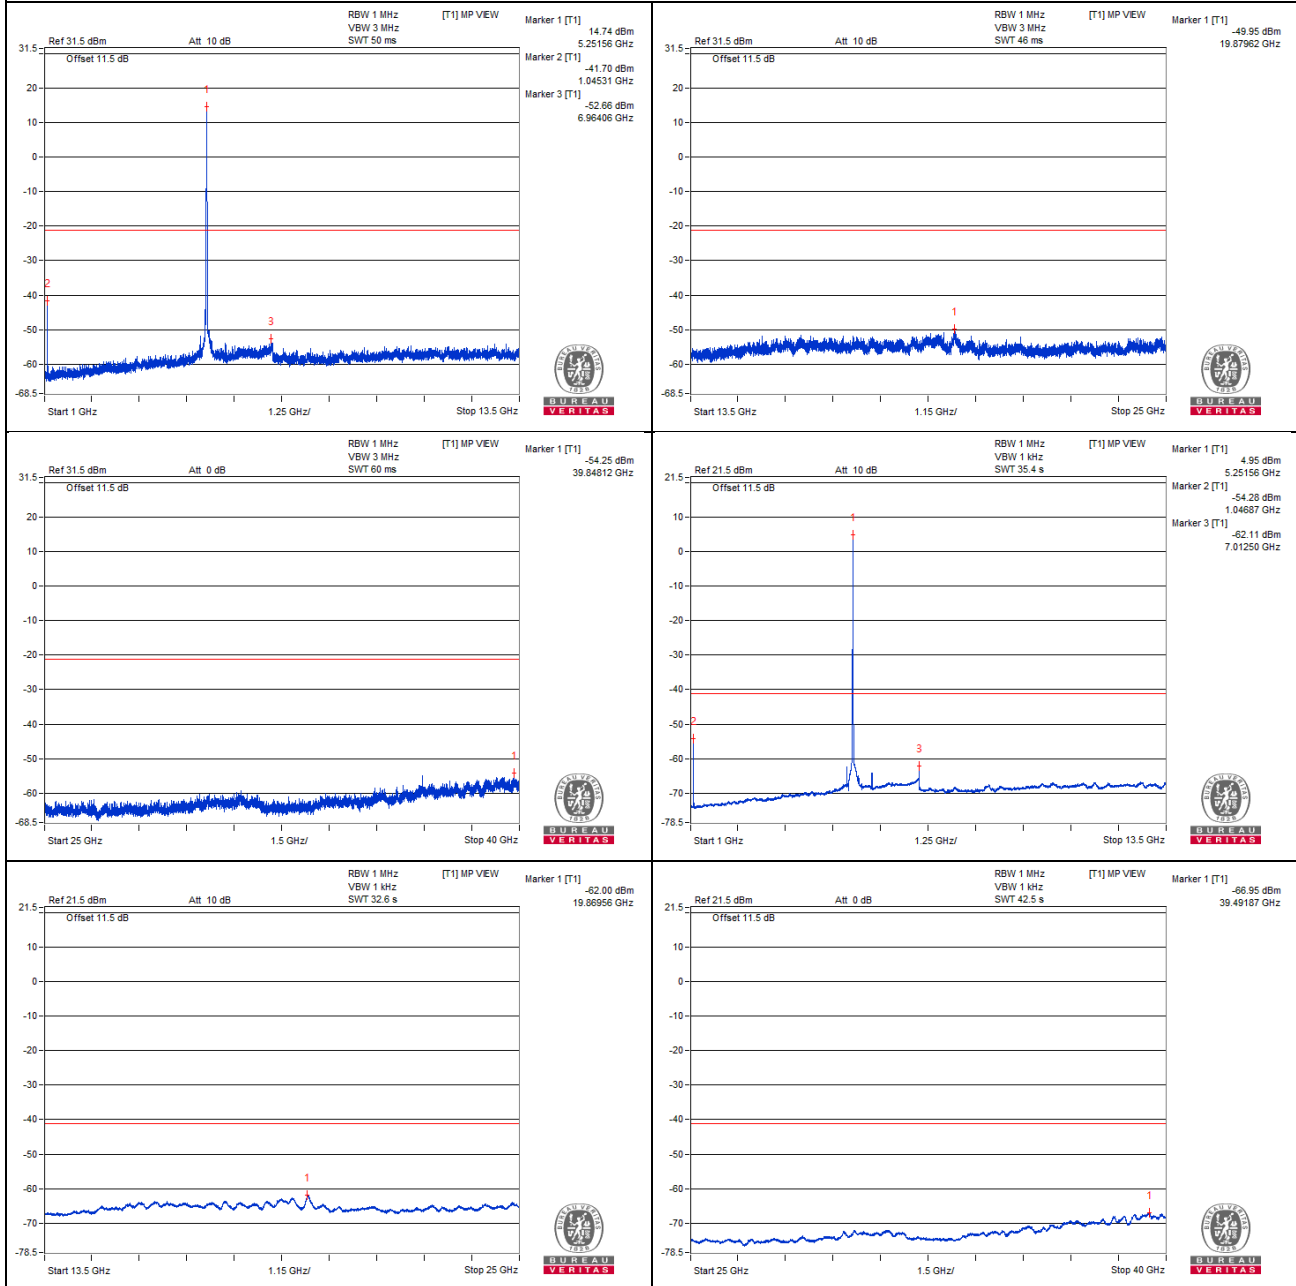

Chain 1

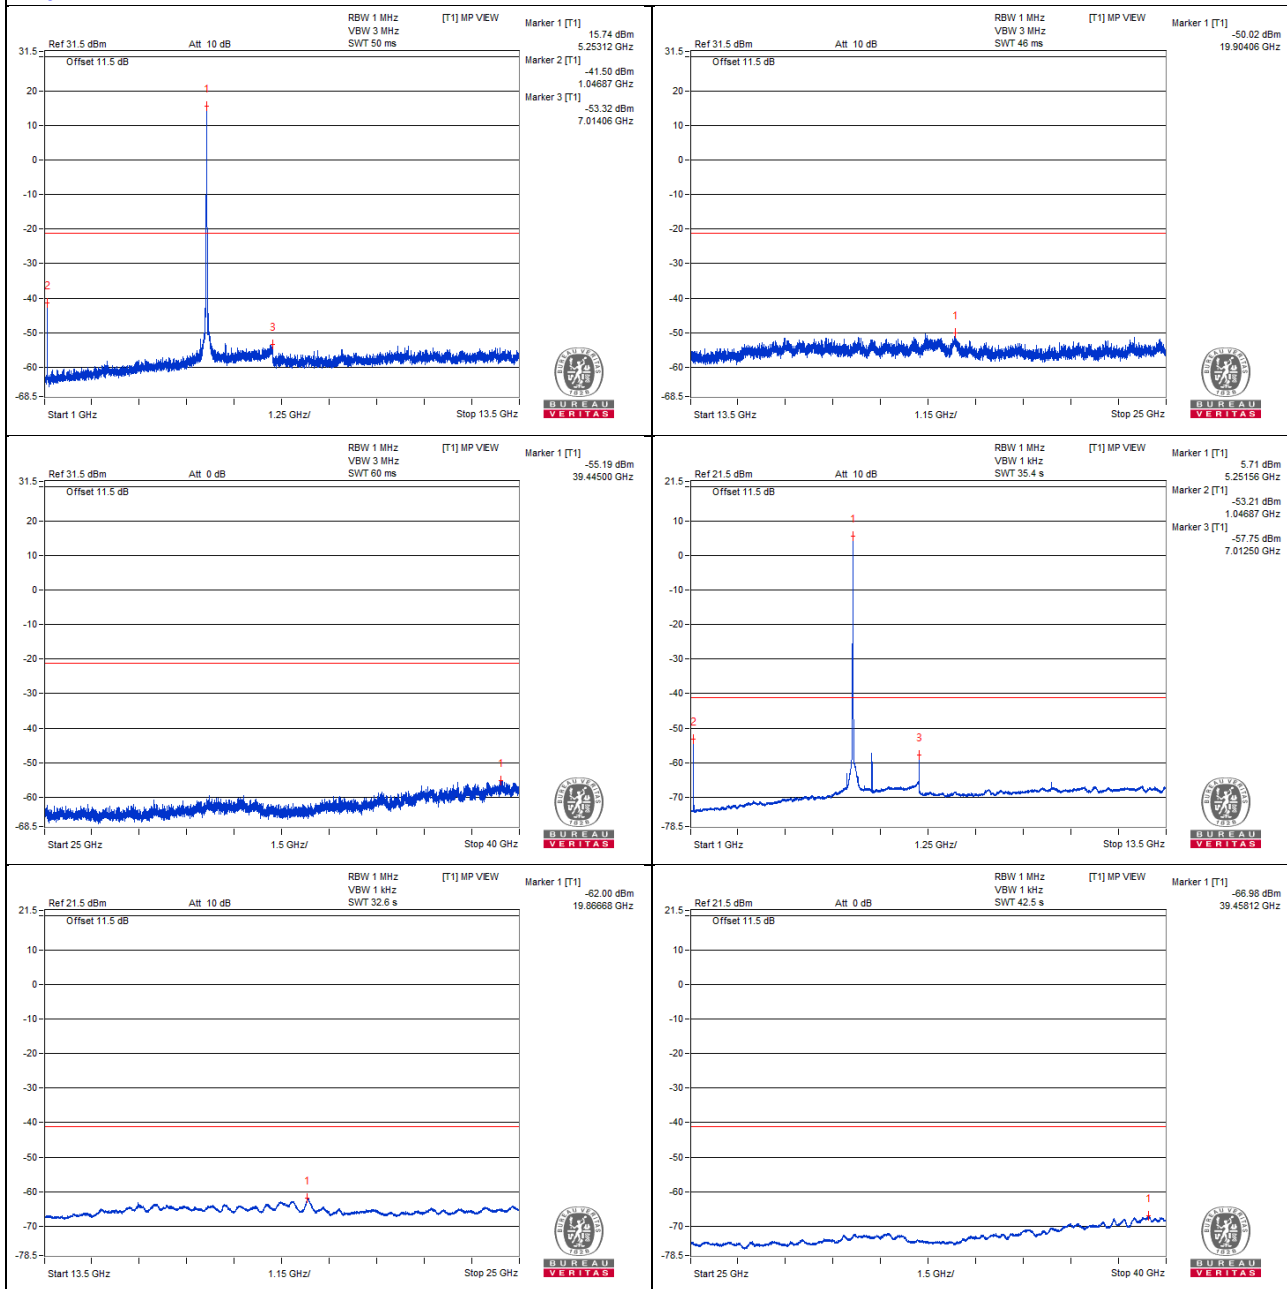

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5350.57 PK	53.97	74	-20.03	-51.38	-50.17	6.43	-41.29
2	5350.07 AV	40.44	54	-13.56	-64.95	-63.67	6.43	-54.82

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

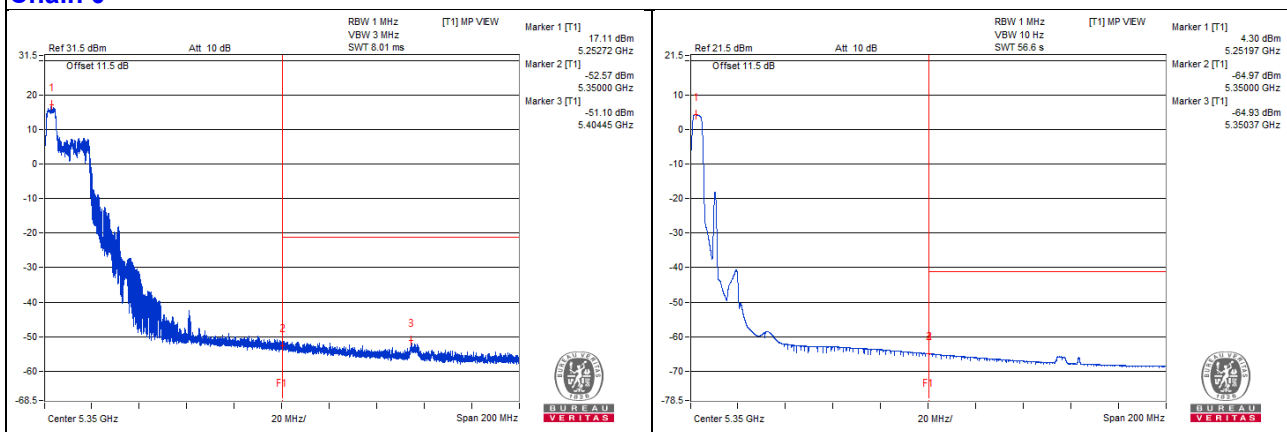

Chain 1

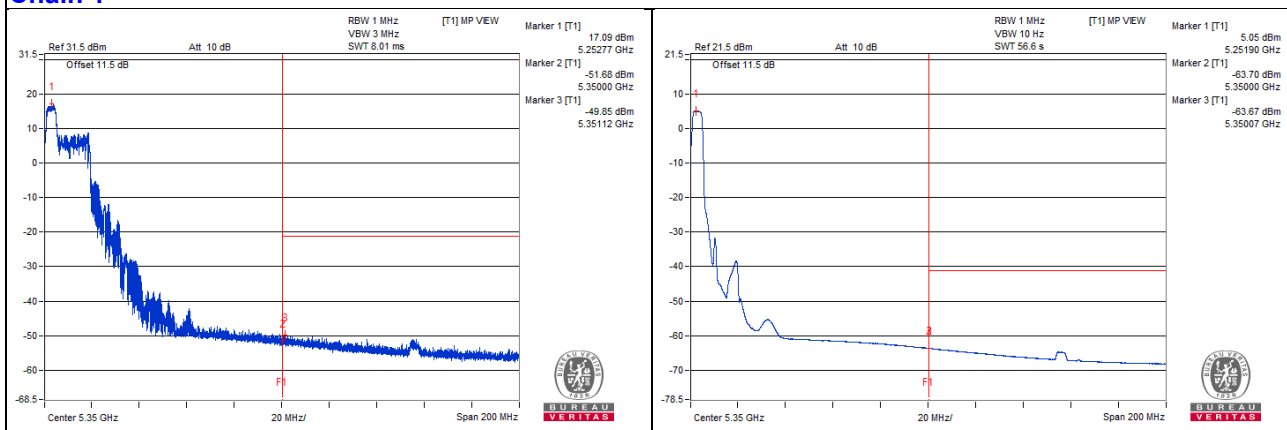

Channel 60


Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	1101.56 PK	63.97	74	-10.03	-44.45	-41.11	8.17	-31.29
2	1101.56 AV	52.15	54	-1.85	-55.39	-53.42	8.17	-43.11
3	7067.18 PK	50.88	68.2	-17.32	-56.21	-54.99	8.17	-44.38
4	10598.43 PK	50.13	68.2	-18.07	-57.24	-55.54	8.17	-45.13
5	15902.06 PK	53.1	74	-20.9	-54.34	-52.53	8.17	-42.16
6	15890.56 AV	41.89	54	-12.11	-64.75	-64.35	8.17	-53.37


Note :

1. Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8
d = measurement distance in 3 meters.
2. # : Non-restricted frequency, no limit for average emission.

Chain 0

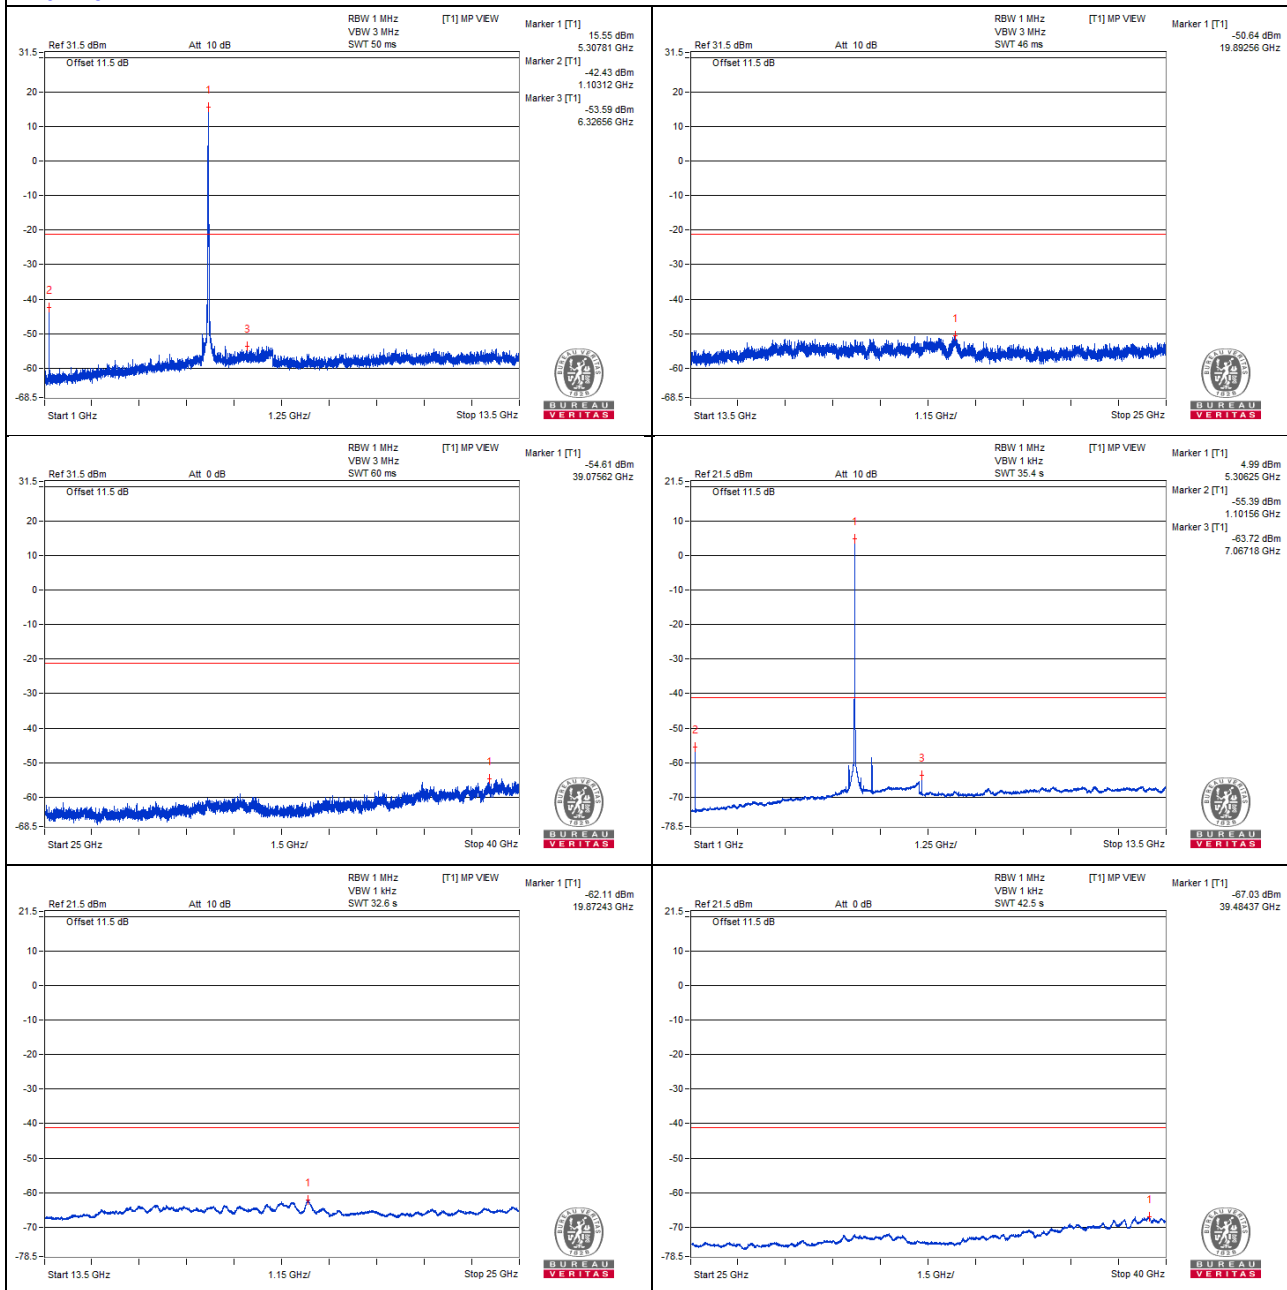

Chain 1

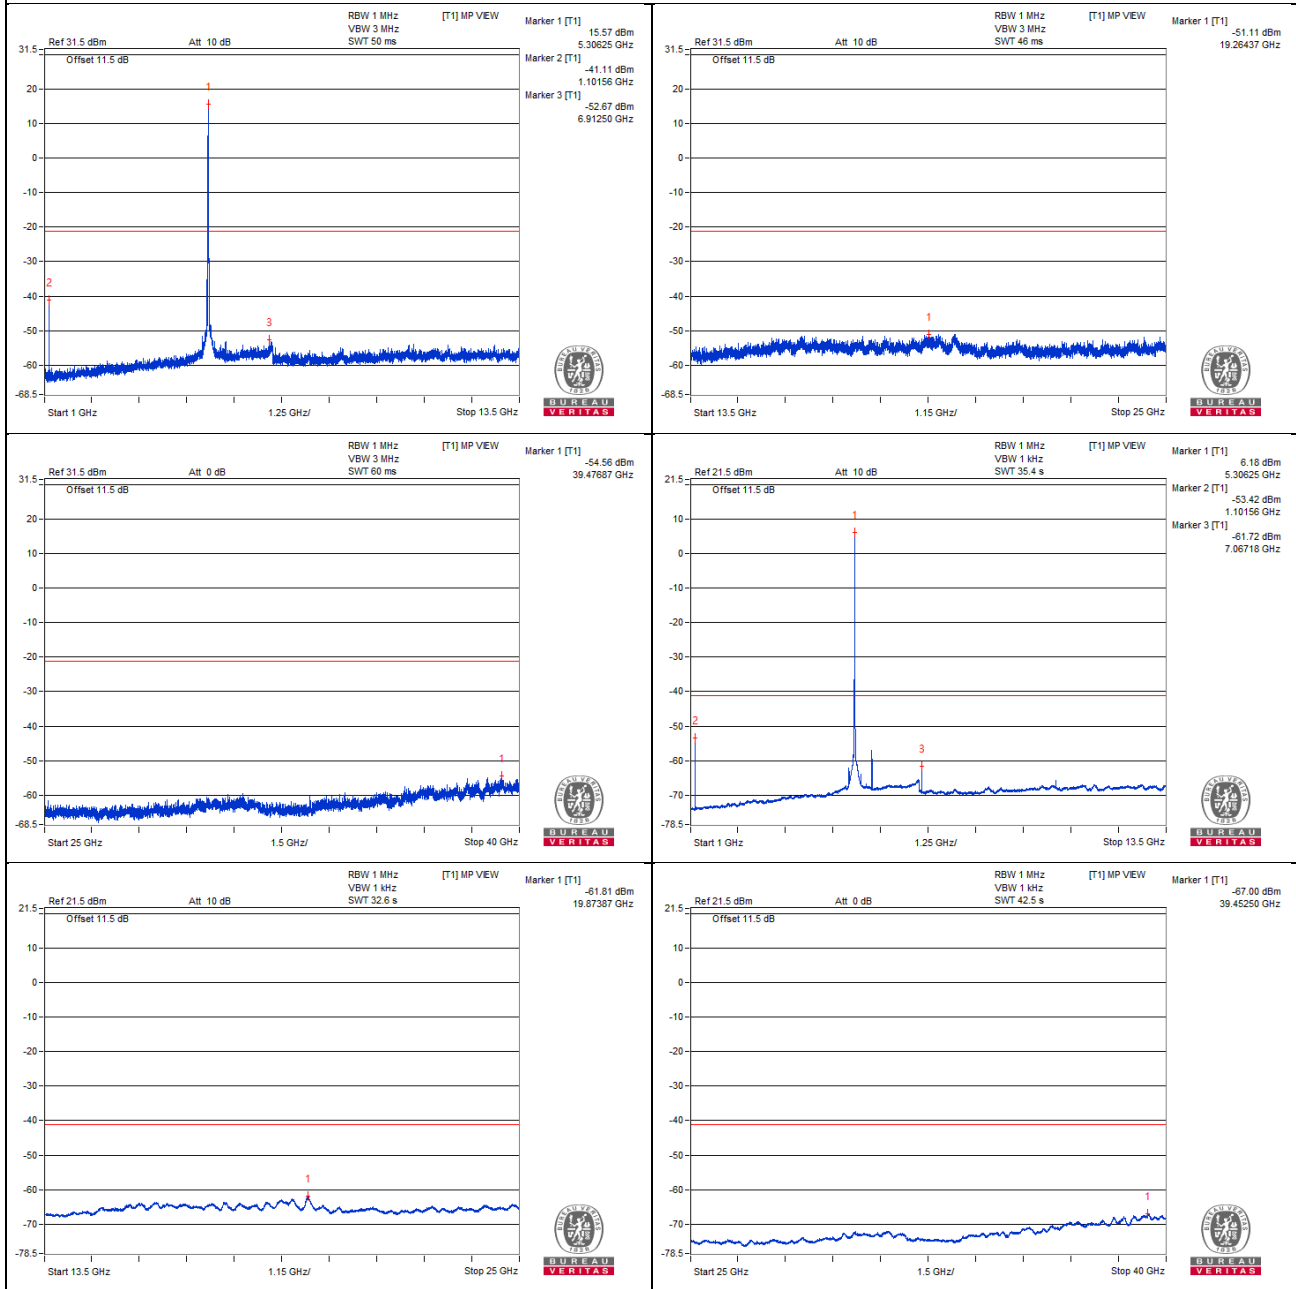

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5350.77 PK	62.04	74	-11.96	-42.92	-42.41	6.43	-33.22
2	5350.3 AV	42.84	54	-11.16	-62.68	-61.17	6.43	-52.42

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

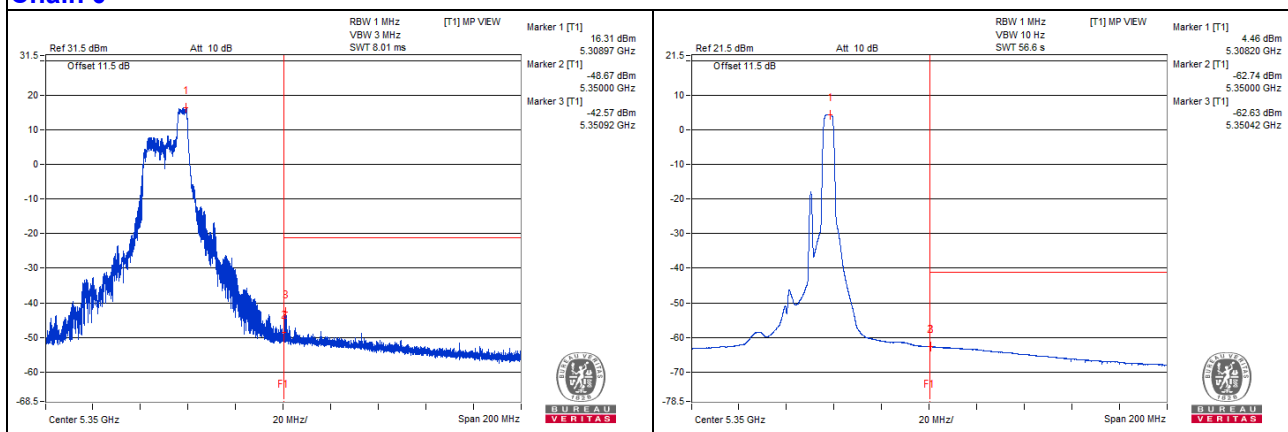

Chain 1

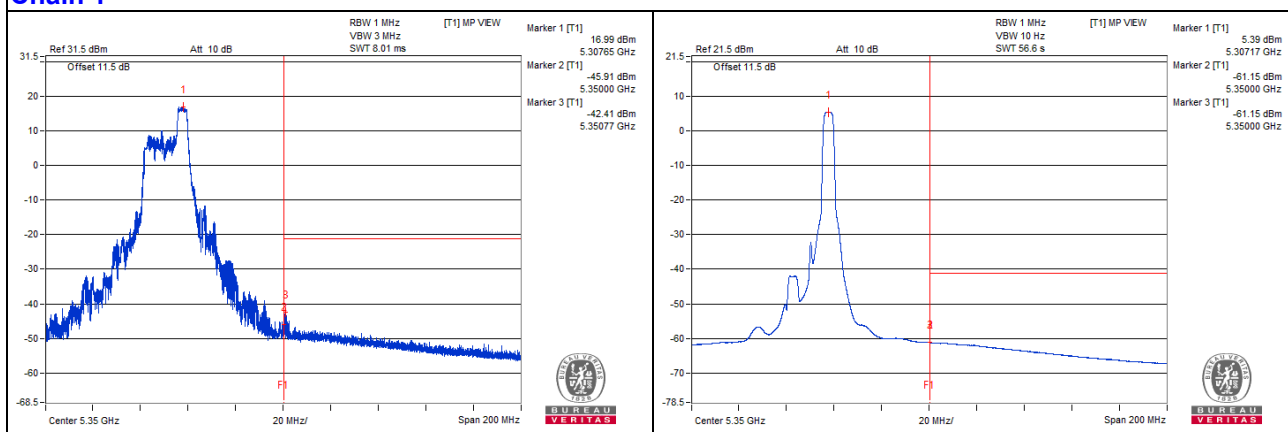

Channel 64

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	1121.87 PK	63.43	74	-10.57	-43.72	-42.4	8.17	-31.83
2	1121.87 AV	51.06	54	-2.94	-56.31	-54.61	8.17	-44.2
3	7093.75 PK	49.97	68.2	-18.23	-56.67	-56.27	8.17	-45.29
4	10632.81 PK	49.74	74	-24.26	-57.11	-56.32	8.17	-45.52
5	10634.37 AV	38.6	54	-15.4	-67.67	-68.01	8.17	-56.66
6	15950.93 PK	51.72	74	-22.28	-55.34	-54.17	8.17	-43.54
7	15966.75 AV	40.81	54	-13.19	-65.55	-65.72	8.17	-54.45


Note :

1. Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8


d = measurement distance in 3 meters.

2. # : Non-restricted frequency, no limit for average emission.

Chain 0

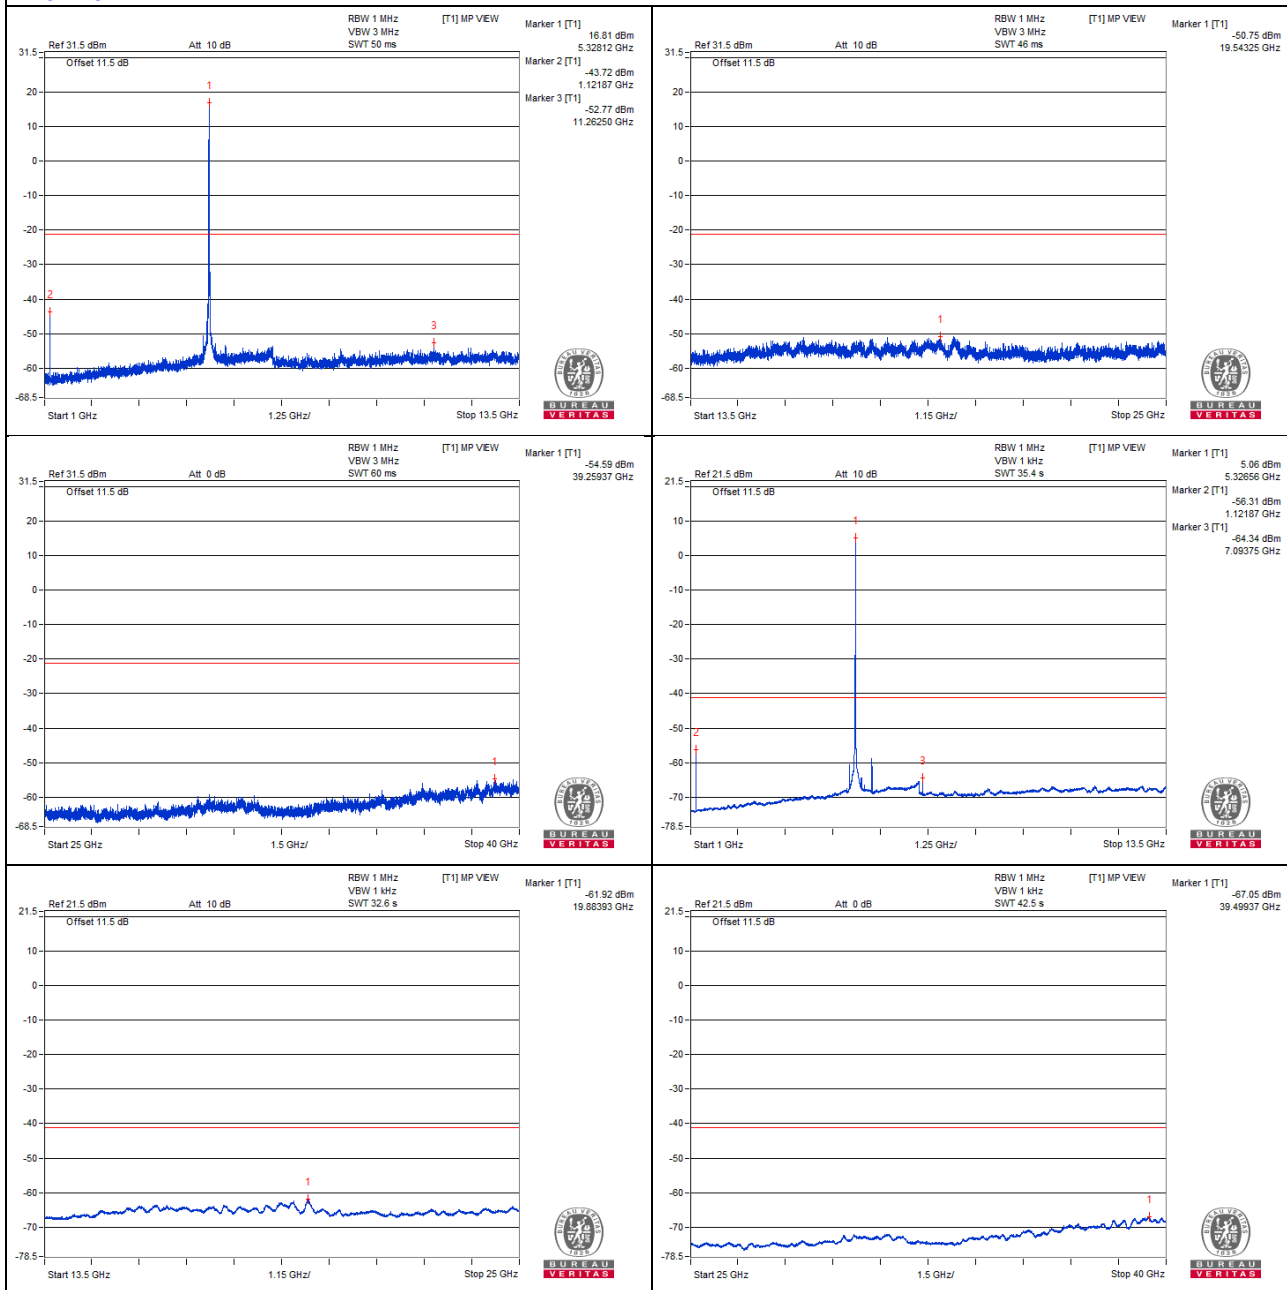

Chain 1

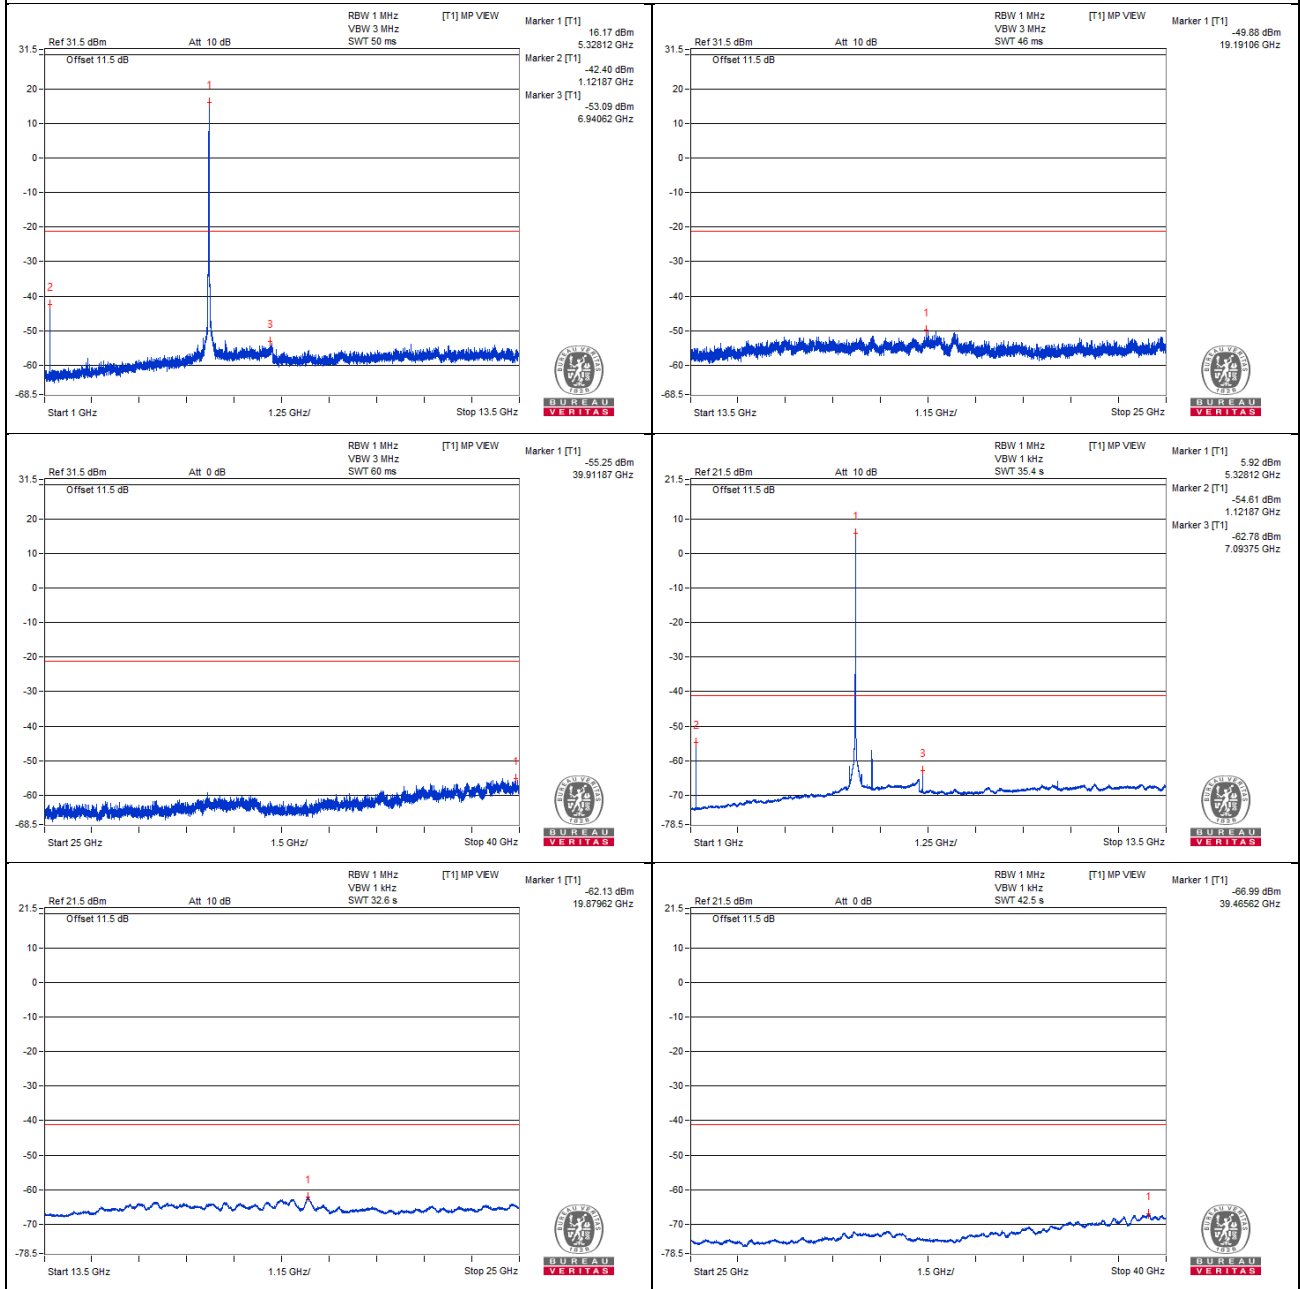

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5350.15 PK	71.98	74	-2.02	-33.1	-32.38	6.43	-23.28
2	5350.02 AV	44.37	54	-9.63	-60.99	-59.76	6.43	-50.89

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

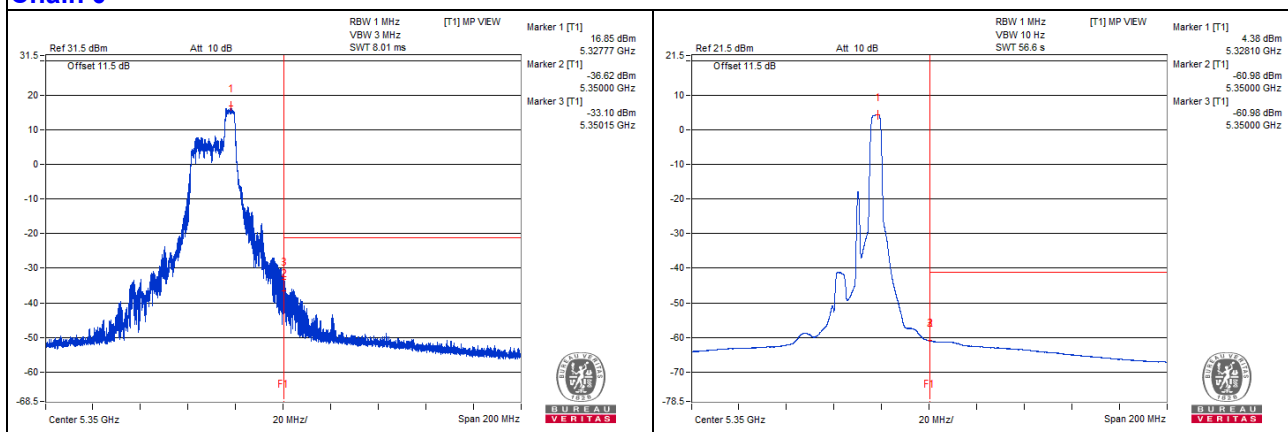

Chain 1

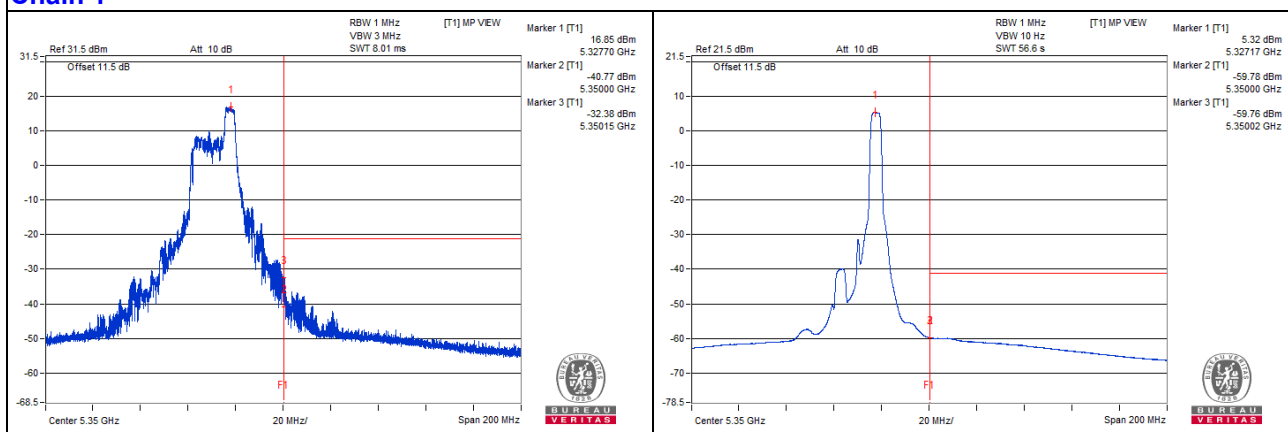

Channel 100


Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	1287.5 PK	58.83	68.2	-9.37	-50.54	-45.87	8.17	-36.43
2	7323.43 PK	48.4	74	-25.6	-57.61	-58.51	8.17	-46.86
3	7329.68 AV	37.61	54	-16.39	-68.8	-68.87	8.17	-57.65
4	11004.68 PK	49.52	74	-24.48	-57.23	-56.63	8.17	-45.74
5	10996.87 AV	38.53	54	-15.47	-67.73	-68.09	8.17	-56.73
6	16495.75 PK	53.23	68.2	-14.97	-53.2	-53.22	8.17	-42.03


Note :

1. Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8
d = measurement distance in 3 meters.
2. # : Non-restricted frequency, no limit for average emission.

Chain 0

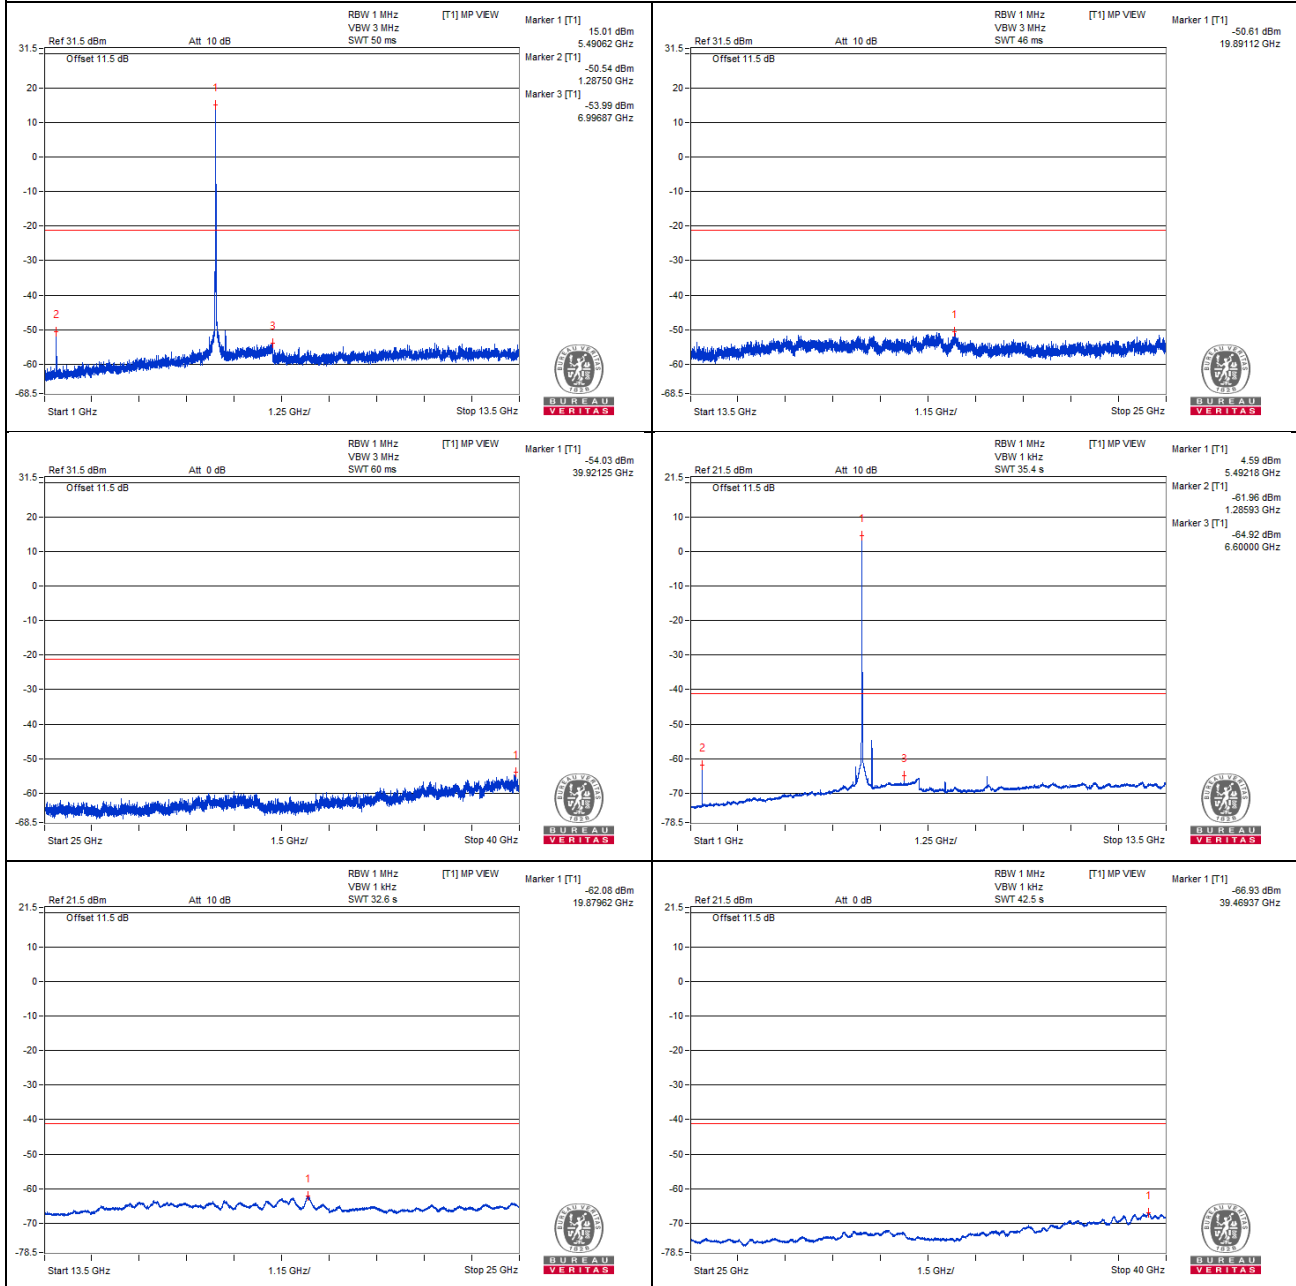

Chain 1

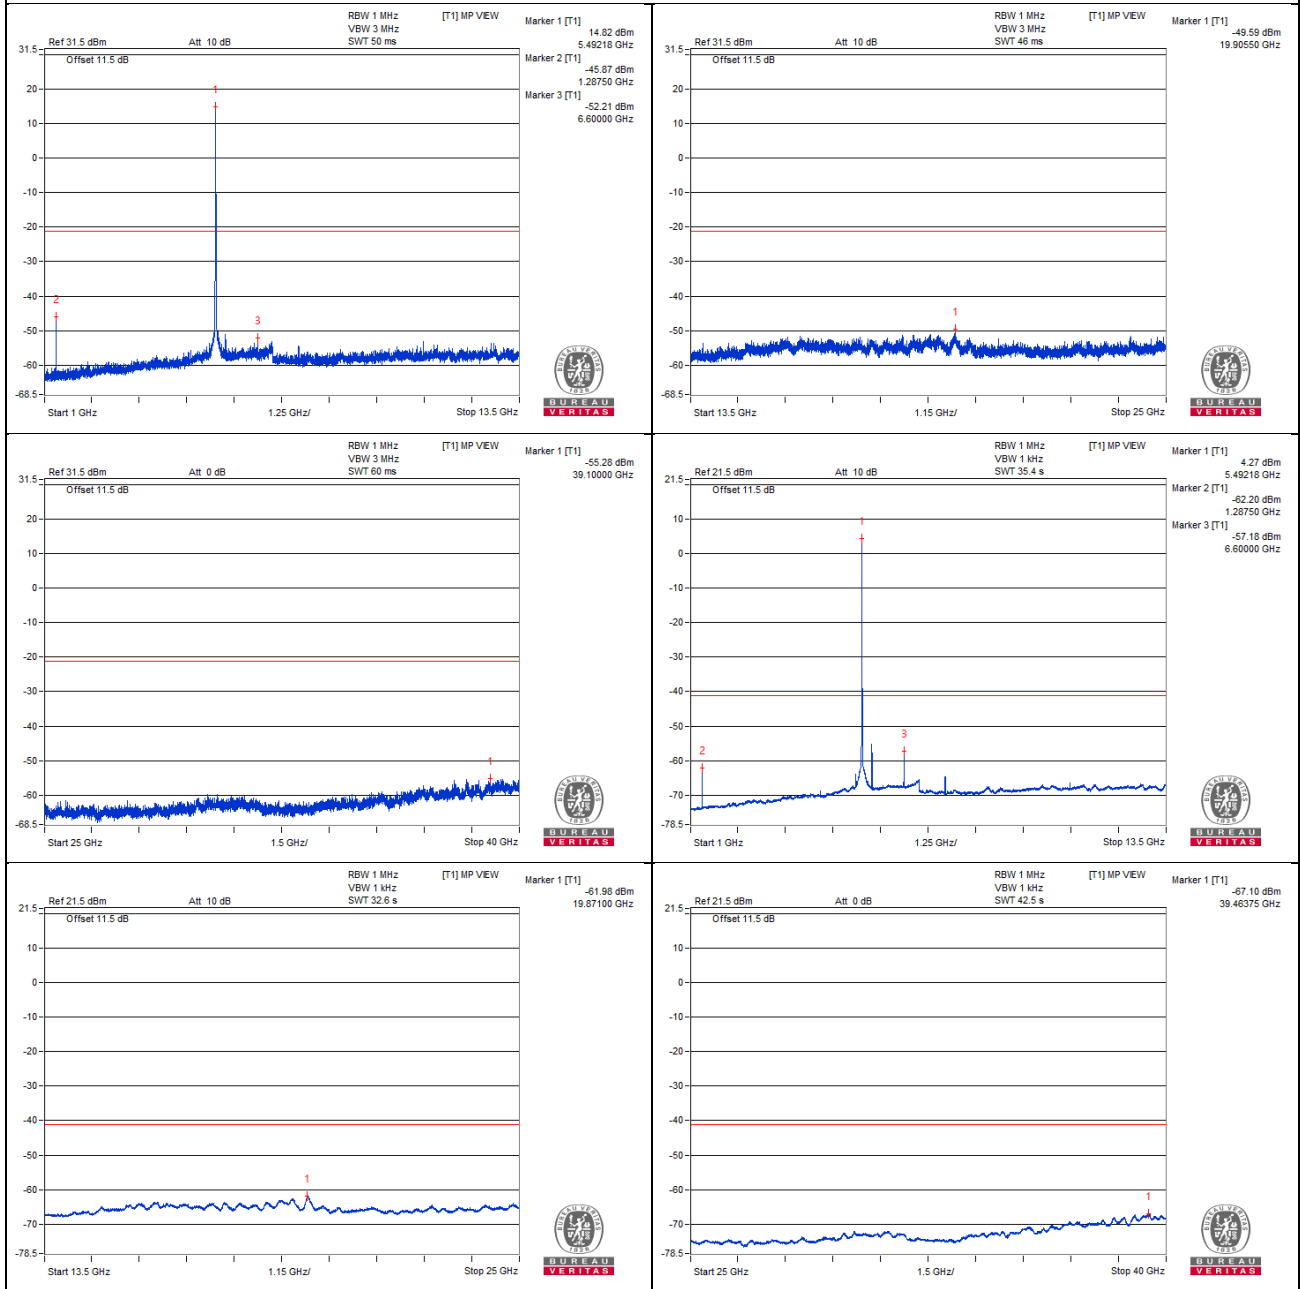

Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5454.78 PK	61.66	74	-12.34	-44.99	-43.93	7.82	-33.6
2	5459.43 AV	47.8	54	-6.2	-58.43	-58.16	7.82	-47.46
3	5469.34 PK	68.93	68.2	*0.73	-38.82	-35.97	7.82	-26.33


Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8


d = measurement distance in 3 meters.

* The unwanted emission was verified and the test result was passed by radiated measurement.
(Please refer APPENDIX B)

Chain 0

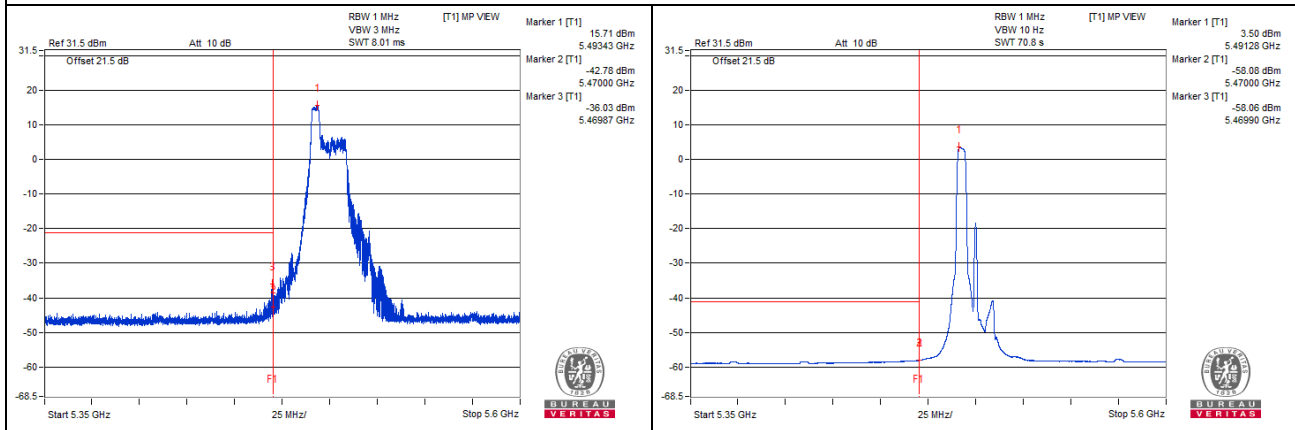

Chain 1

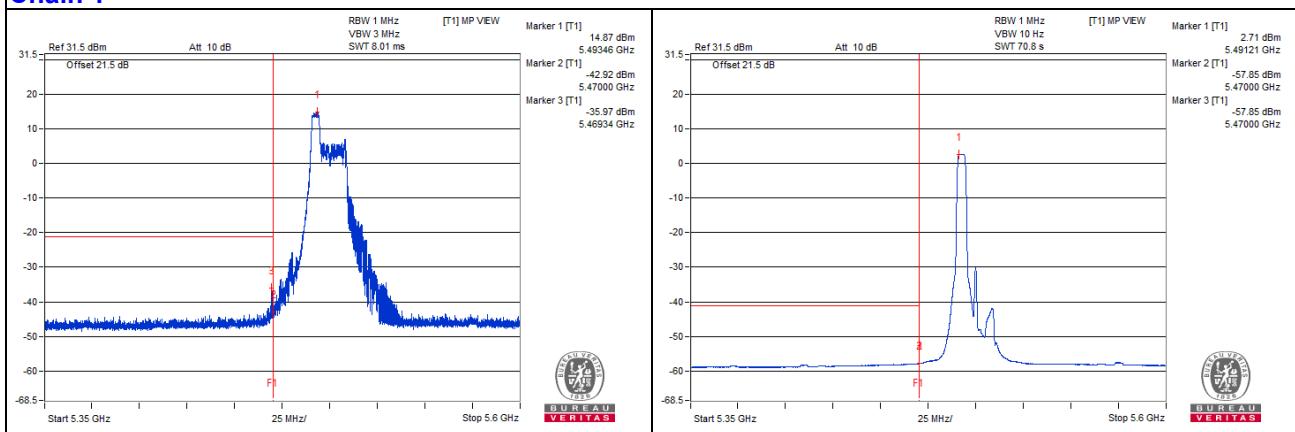

Channel 116

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	1367.18 PK	54.87	74	-19.13	-51.82	-51.33	8.17	-40.39
2	1367.18 AV	42.83	54	-11.17	-63.56	-63.66	8.17	-52.43
3	7437.5 PK	48.11	74	-25.89	-58.64	-58.04	8.17	-47.15
4	7432.81 AV	37.21	54	-16.79	-69.09	-69.38	8.17	-58.05
5	11165.62 PK	50.59	74	-23.41	-54.9	-57.08	8.17	-44.67
6	11168.75 AV	38.69	54	-15.31	-67.7	-67.8	8.17	-56.57
7	16744.43 PK	53.2	68.2	-15	-54.12	-52.51	8.17	-42.06


Note :

1. Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8


d = measurement distance in 3 meters.

2. # : Non-restricted frequency, no limit for average emission.

Chain 0

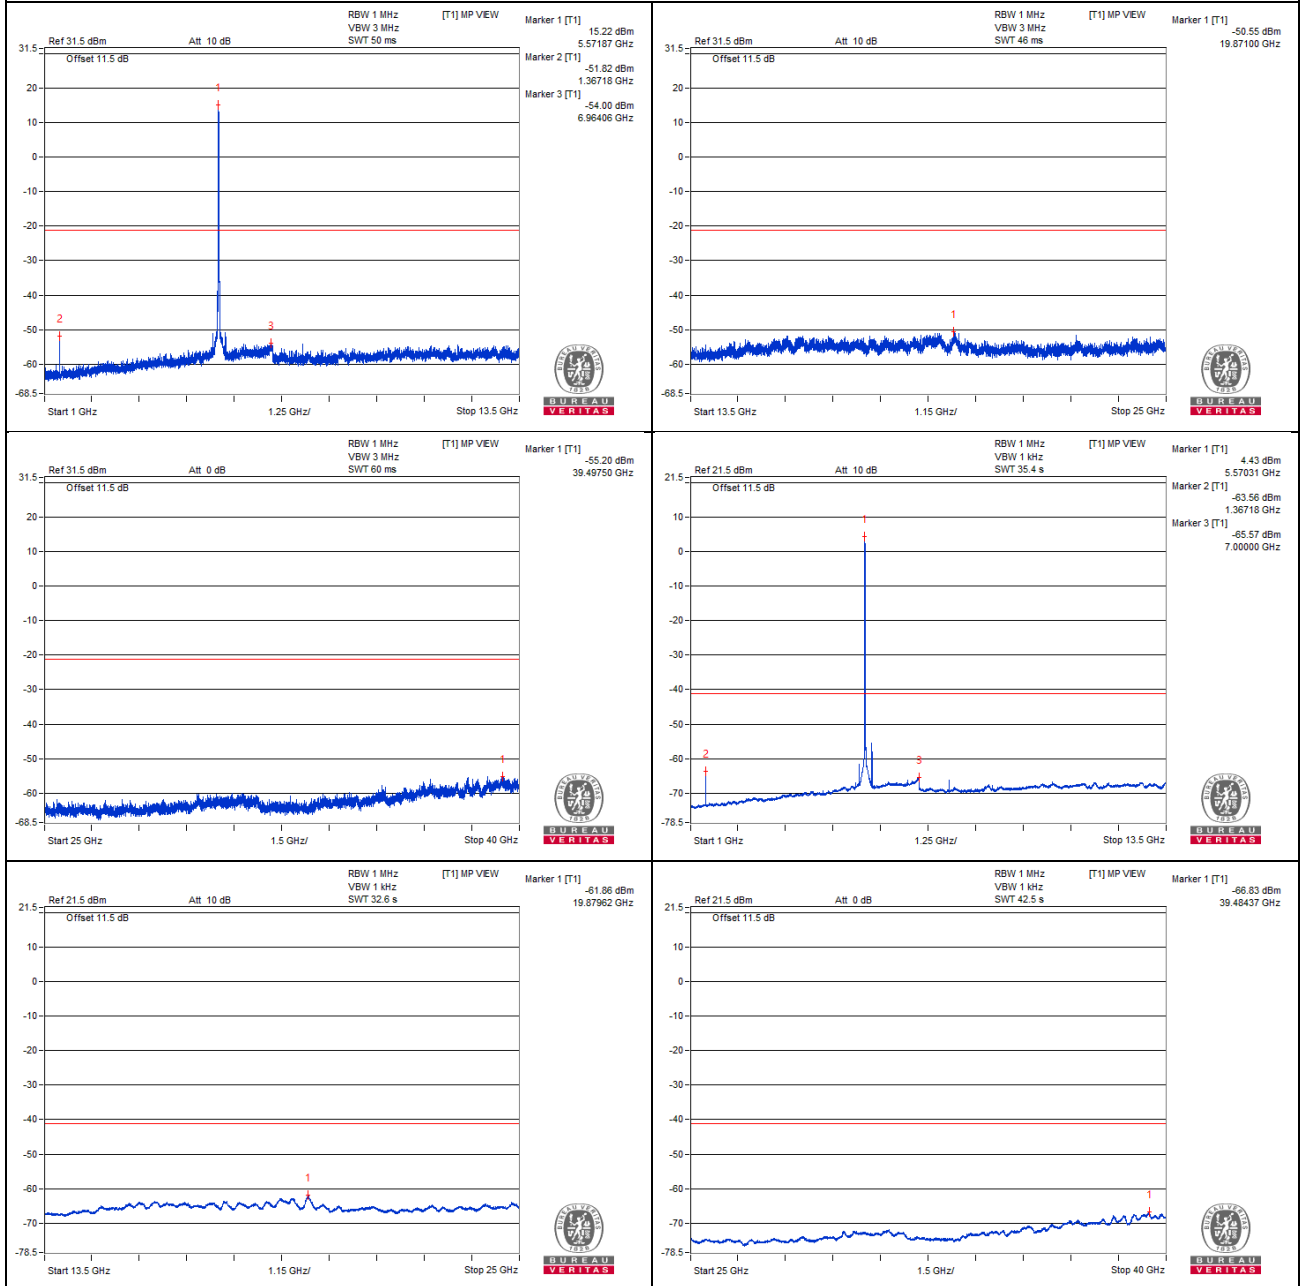

Chain 1

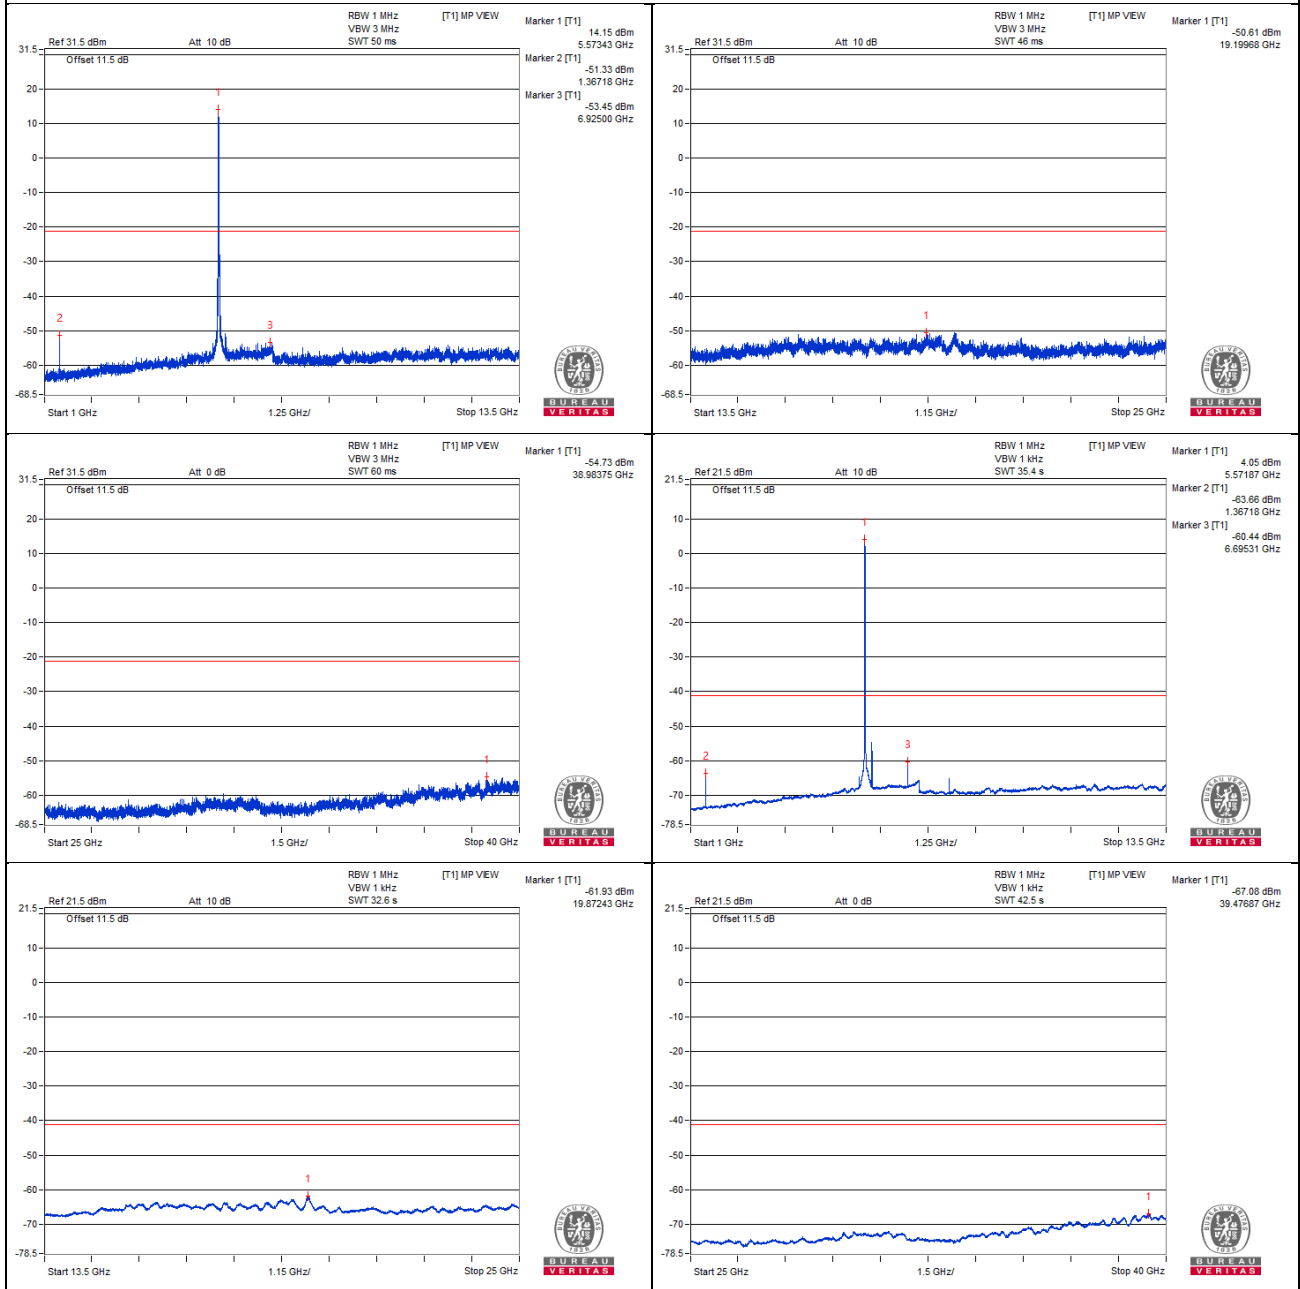

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5418.96 PK	55.06	74	-18.94	-49.52	-53.38	7.82	-40.2
2	5419.56 AV	42.69	54	-11.31	-62.08	-65.31	7.82	-52.57
3	5469.65 PK	52.21	68.2	-15.99	-53.68	-54.08	7.82	-43.05

Note :



Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.



Chain 0

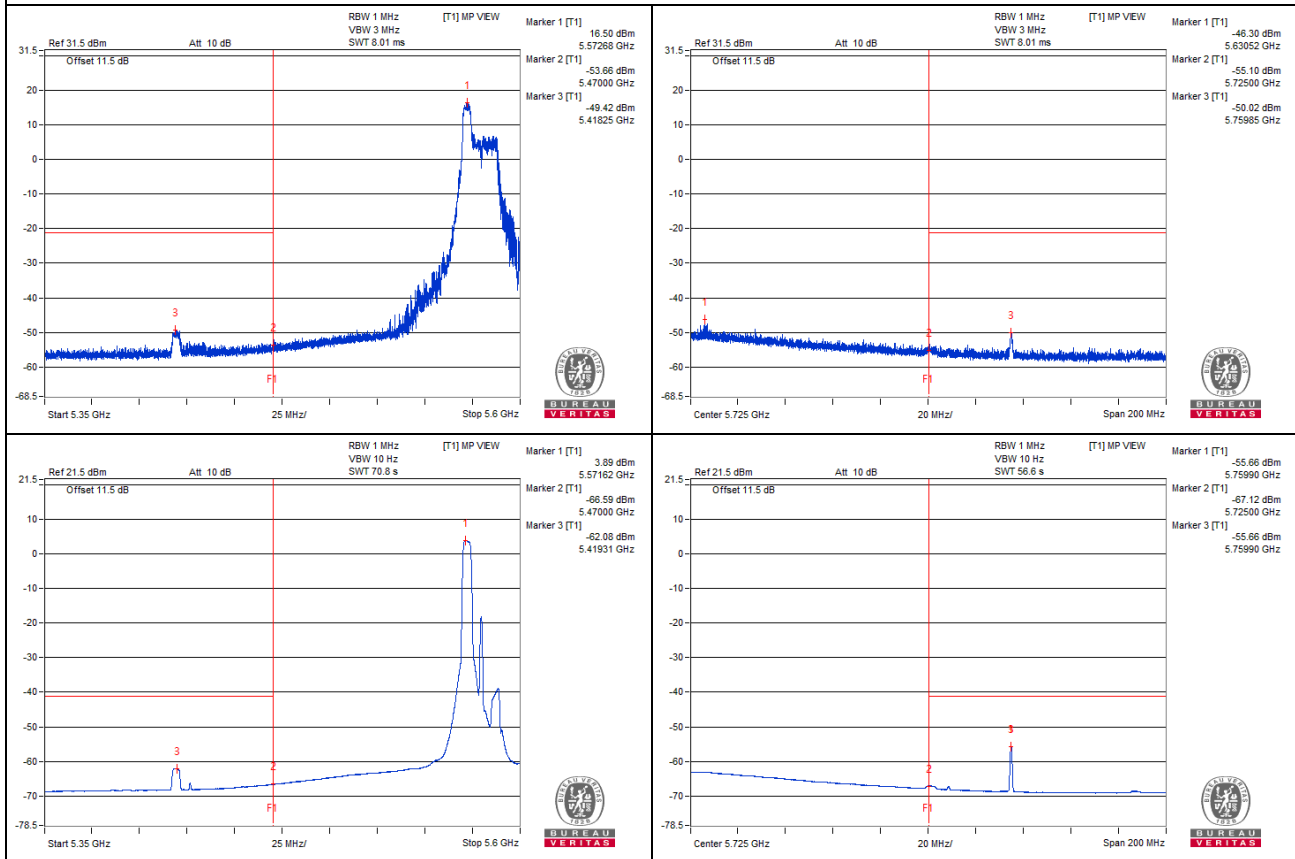

Chain 0

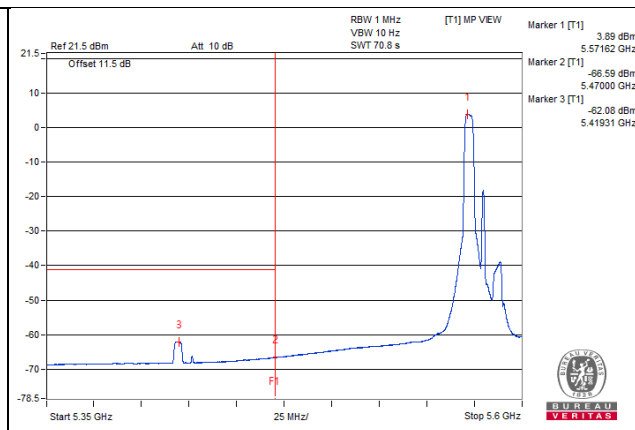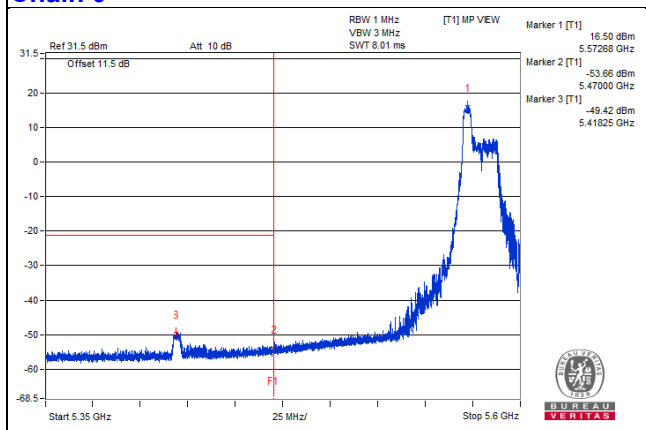

Chain 1

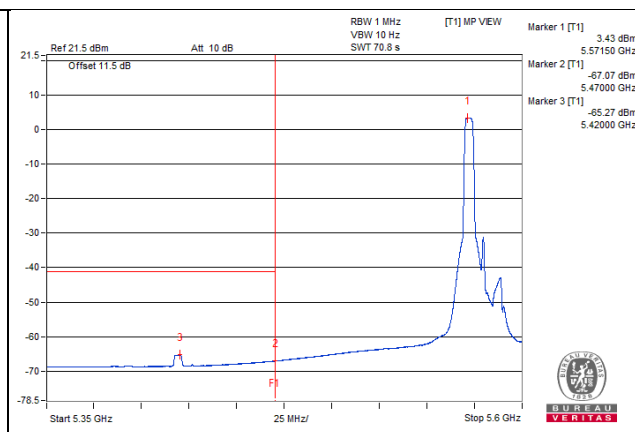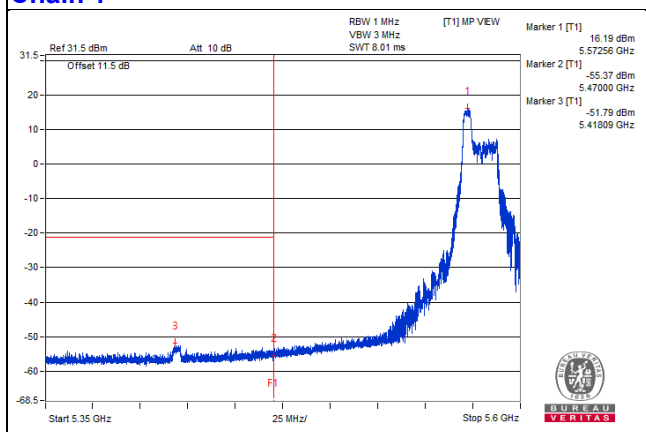

Channel 140

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	1501.56 PK	54.53	74	-19.47	-54.56	-50.27	8.17	-40.73
2	1501.56 AV	42.89	54	-11.11	-64.86	-62.54	8.17	-52.37
3	7606.25 PK	49.15	74	-24.85	-57.3	-57.28	8.17	-46.11
4	7606.25 AV	37.52	54	-16.48	-69.15	-68.7	8.17	-57.74
5	11404.68 PK	49.9	74	-24.1	-56.68	-56.4	8.17	-45.36
6	11395.31 AV	38.9	54	-15.1	-67.36	-67.72	8.17	-56.36
7	17108.12 PK	52.48	68.2	-15.72	-54.43	-53.54	8.17	-42.78


Note :

1. Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8


d = measurement distance in 3 meters.

2. # : Non-restricted frequency, no limit for average emission.

Chain 0

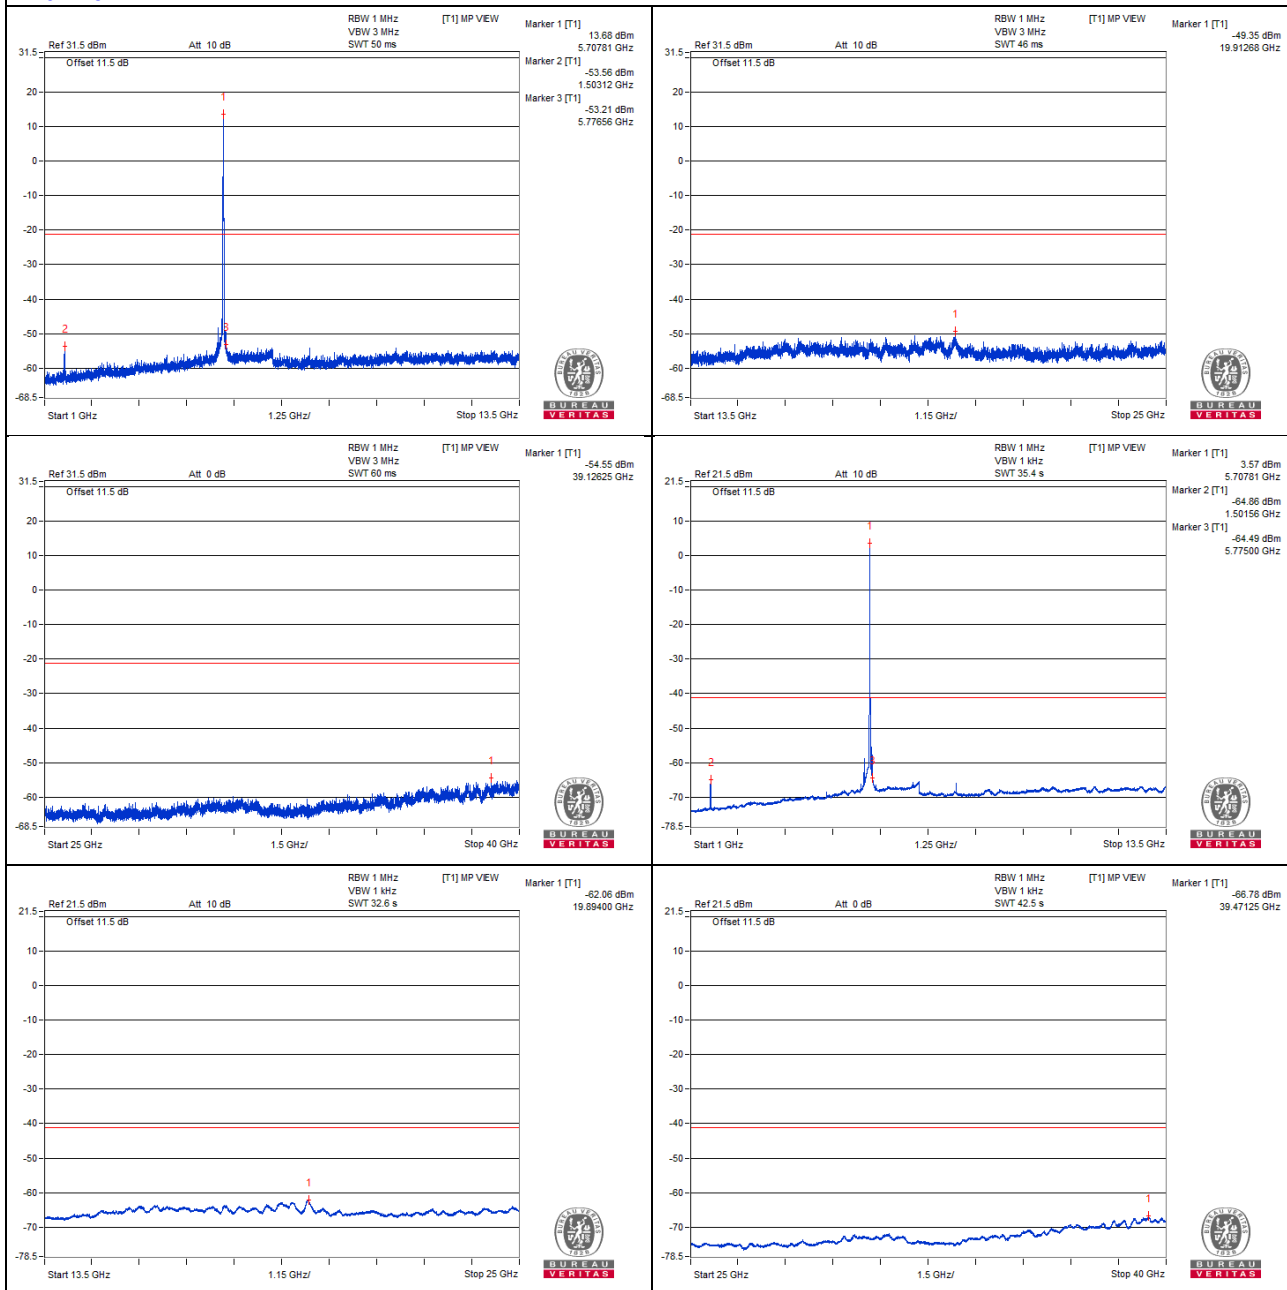

Chain 1

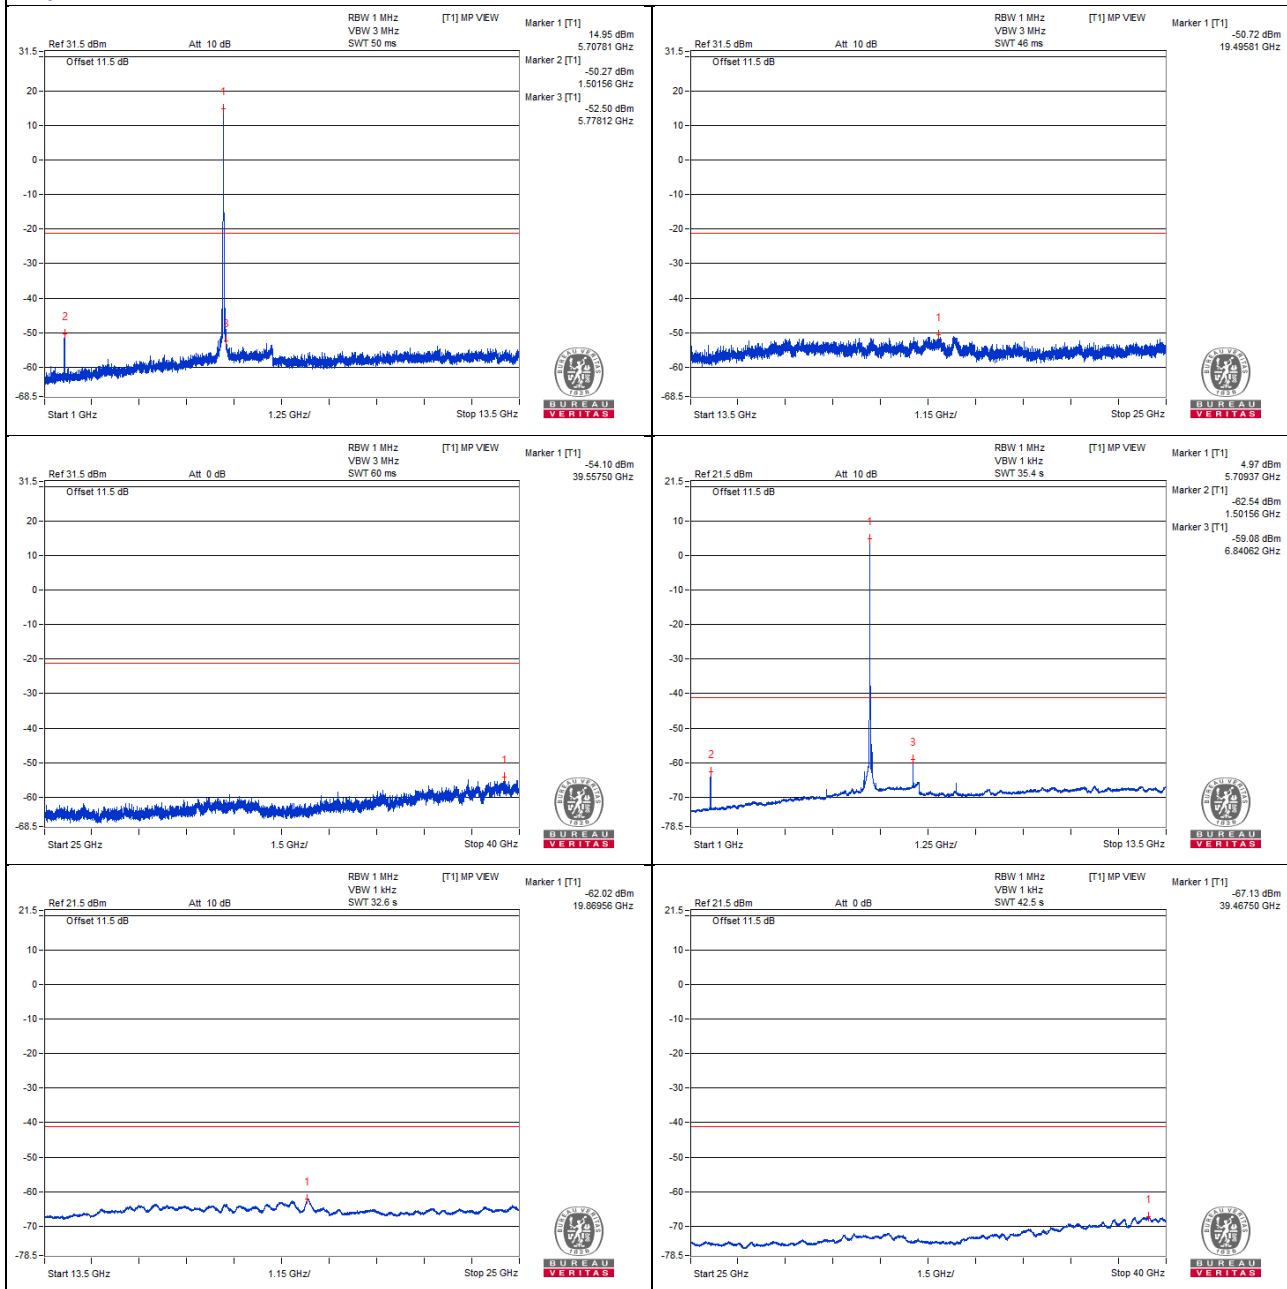

Bandedge table

No.	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5726.45 PK	72.1	68.2	*3.9	-31.45	-40.88	7.82	-23.16


Note :

Emission Level (dBUV/m) = EIRP Level (dBm) – 20log(d) + 104.8


d = measurement distance in 3 meters.

* The unwanted emission was verified and the test result was passed by radiated measurement.
(Please refer APPENDIX B)

Chain 0

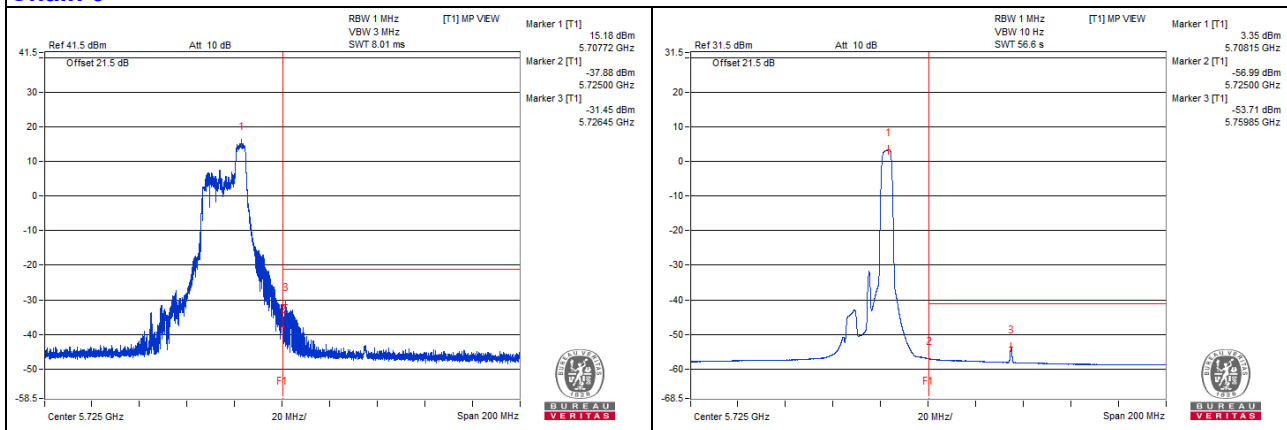

Chain 1

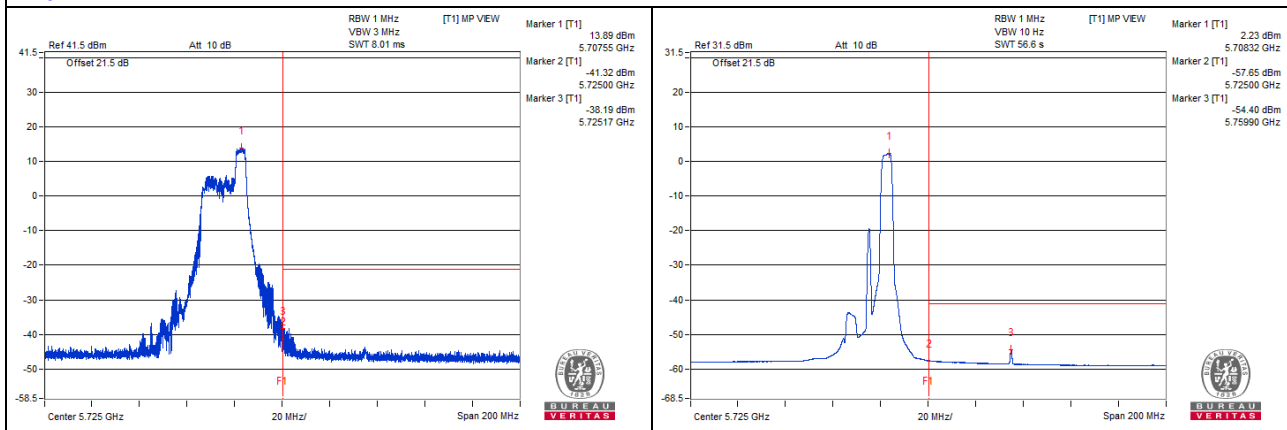

Channel 144

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	1521.87 PK	55.68	74	-18.32	-52.92	-49.32	8.17	-39.58
2	1521.87 AV	44.08	54	-9.92	-63.71	-61.33	8.17	-51.18
3	7634.37 PK	48.61	74	-25.39	-56.95	-58.94	8.17	-46.65
4	7620.31 AV	37.53	54	-16.47	-68.93	-68.9	8.17	-57.73
5	11450 PK	48.93	74	-25.07	-56.97	-58.12	8.17	-46.33
6	11432.81 AV	38.24	54	-15.76	-68.11	-68.29	8.17	-57.02
7	17167.06 PK	52.25	68.2	-15.95	-54.97	-53.53	8.17	-43.01


Note :

1. Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8


d = measurement distance in 3 meters.

2. # : Non-restricted frequency, no limit for average emission.

Chain 0

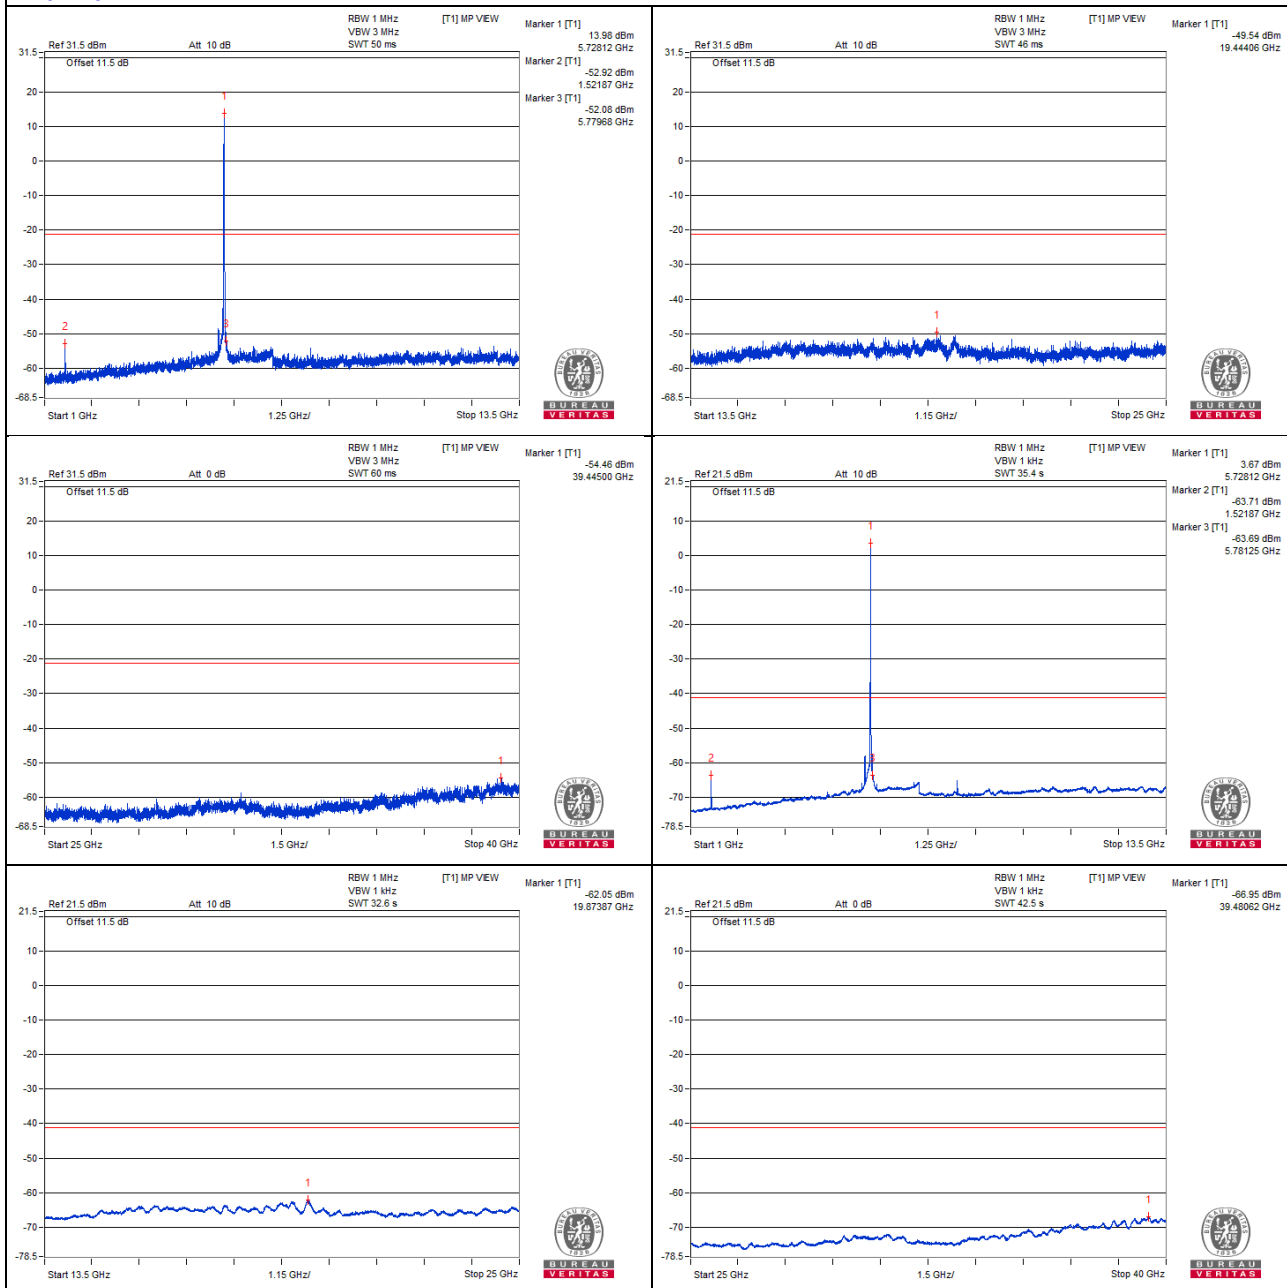

Chain 1

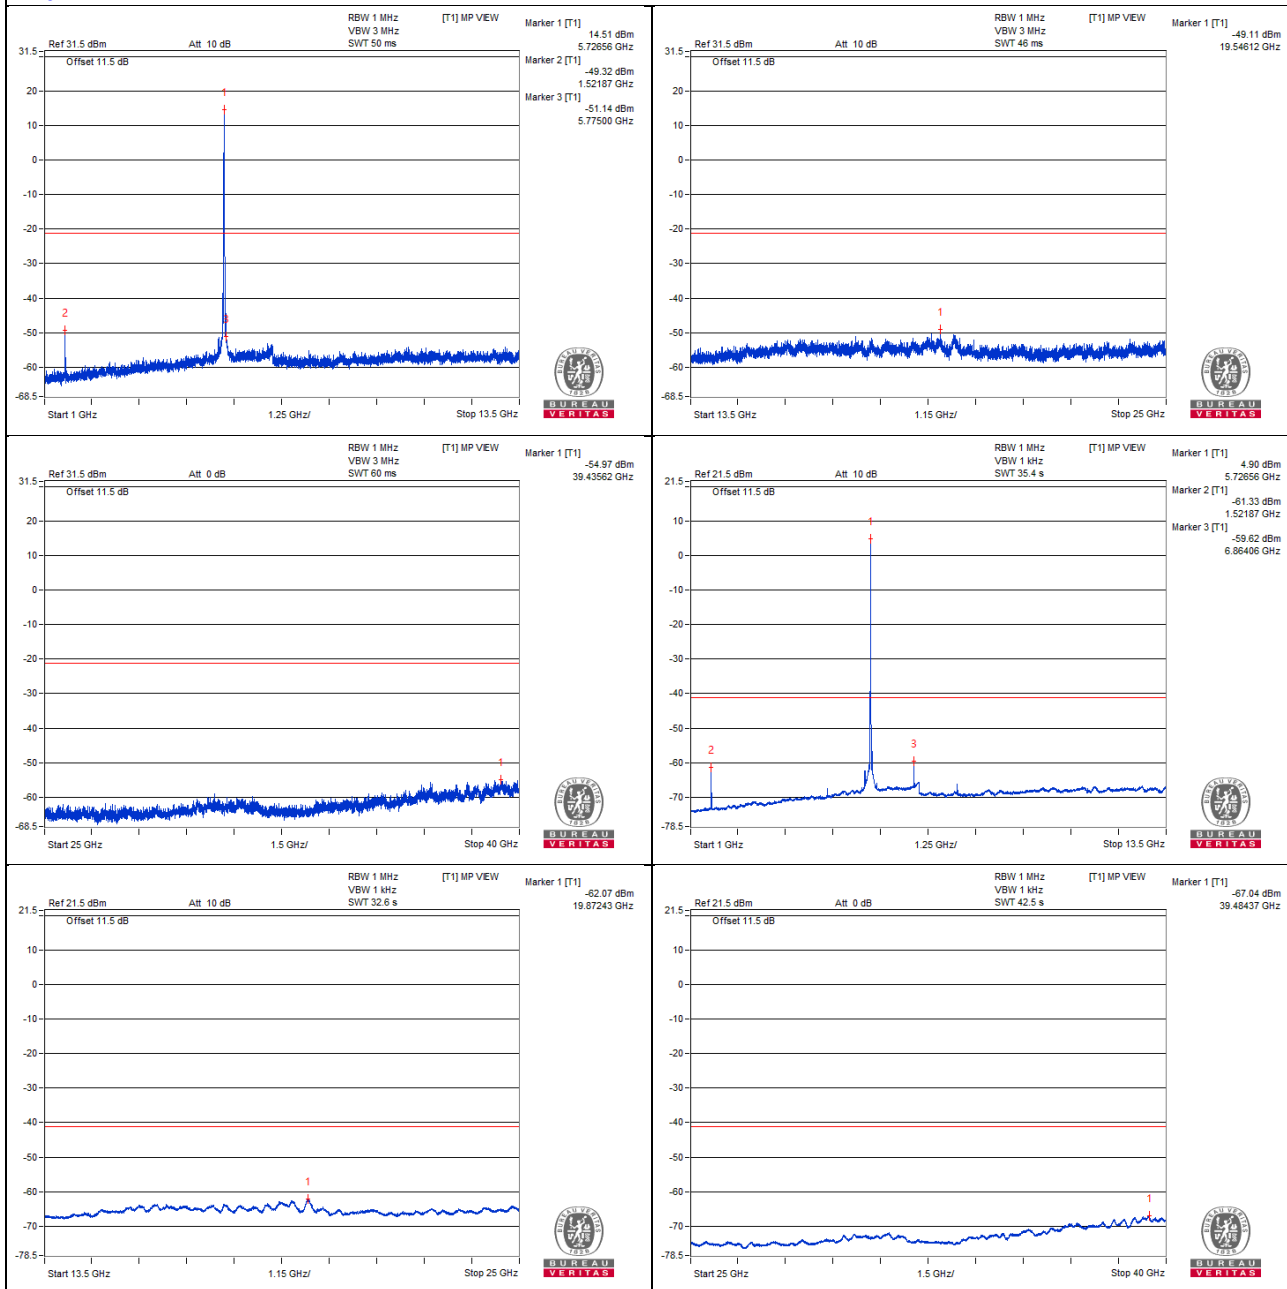

Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5881.67 PK	52.4	68.2	-15.8	-53.87	-53.52	7.82	-42.86


Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8


d = measurement distance in 3 meters.

* The unwanted emission was verified and the test result was passed by radiated measurement.
(Please refer APPENDIX B)

Chain 0

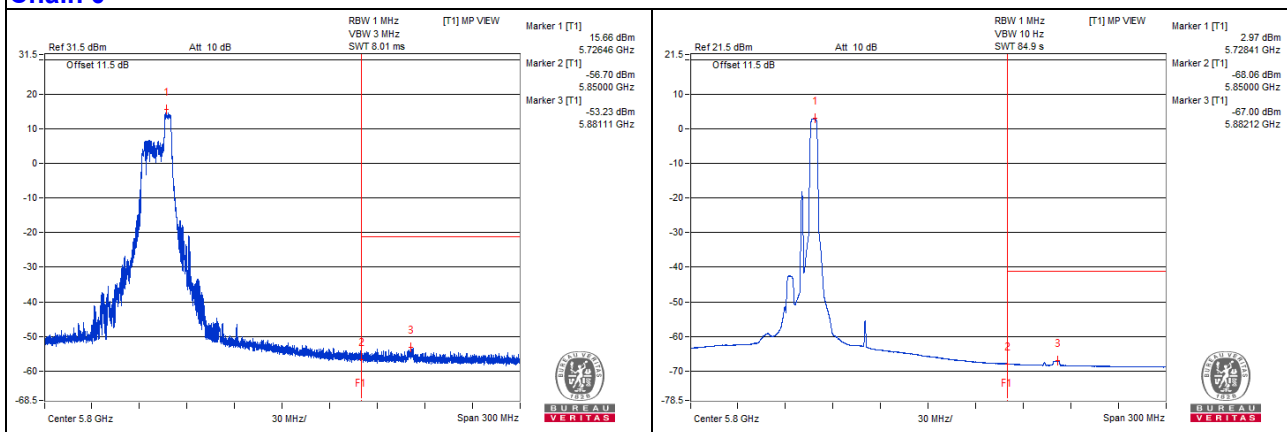

Chain 1

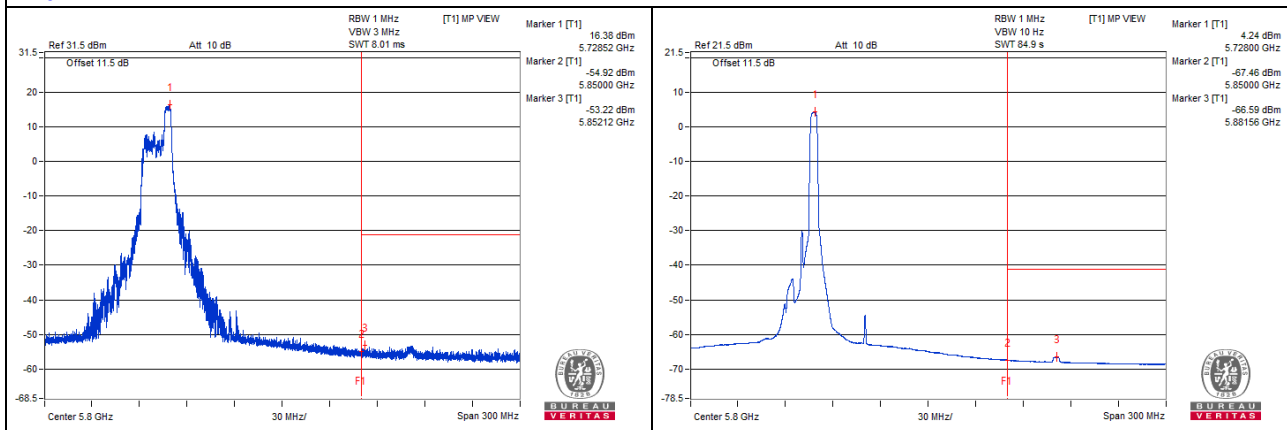

Channel 149

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	1532.81 PK	58.72	74	-15.28	-46.73	-49	8.17	-36.54
2	1531.25 AV	47.5	54	-6.5	-58.42	-59.53	8.17	-47.76
3	7659.37 PK	48.9	74	-25.1	-57.64	-57.45	8.17	-46.36
4	7651.56 AV	37.38	54	-16.62	-69.03	-69.09	8.17	-57.88
5	11484.37 PK	50.04	74	-23.96	-56.04	-56.8	8.17	-45.22
6	11490.62 AV	38.4	54	-15.6	-68.28	-67.82	8.17	-56.86
7	17231.75 PK	52.06	68.2	-16.14	-53.3	-55.82	8.17	-43.2


Note :

1. Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8


d = measurement distance in 3 meters.

2. # : Non-restricted frequency, no limit for average emission.

Chain 0

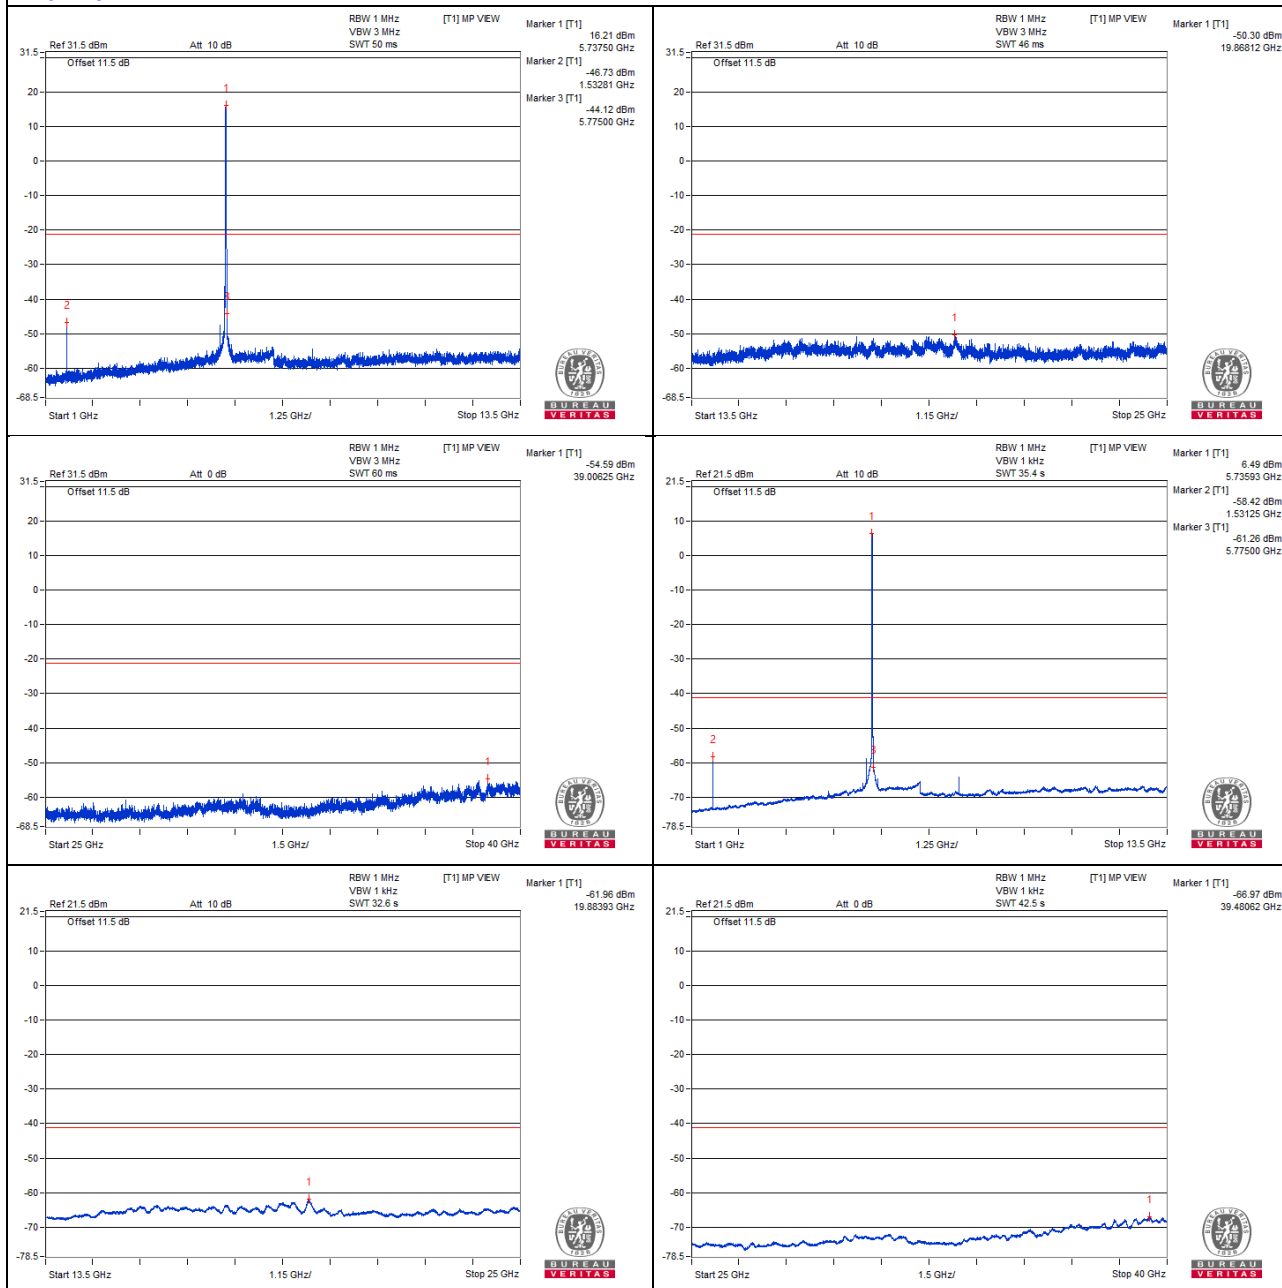


Chain 1

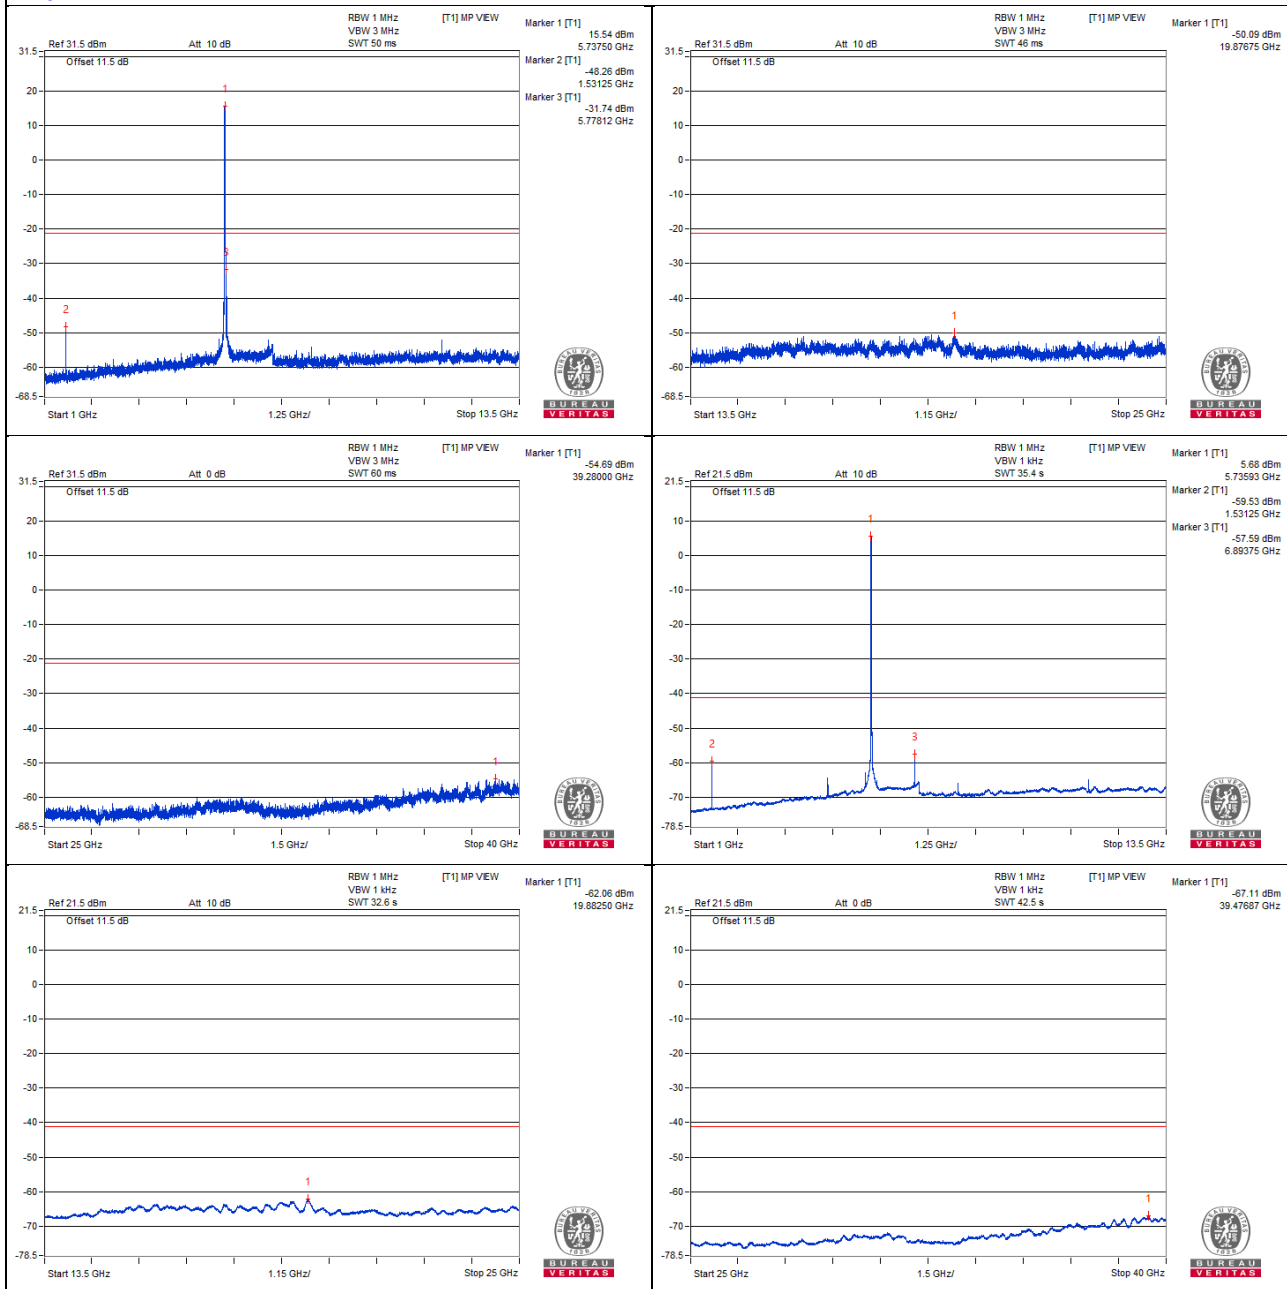


Bandedge table

Chain 0

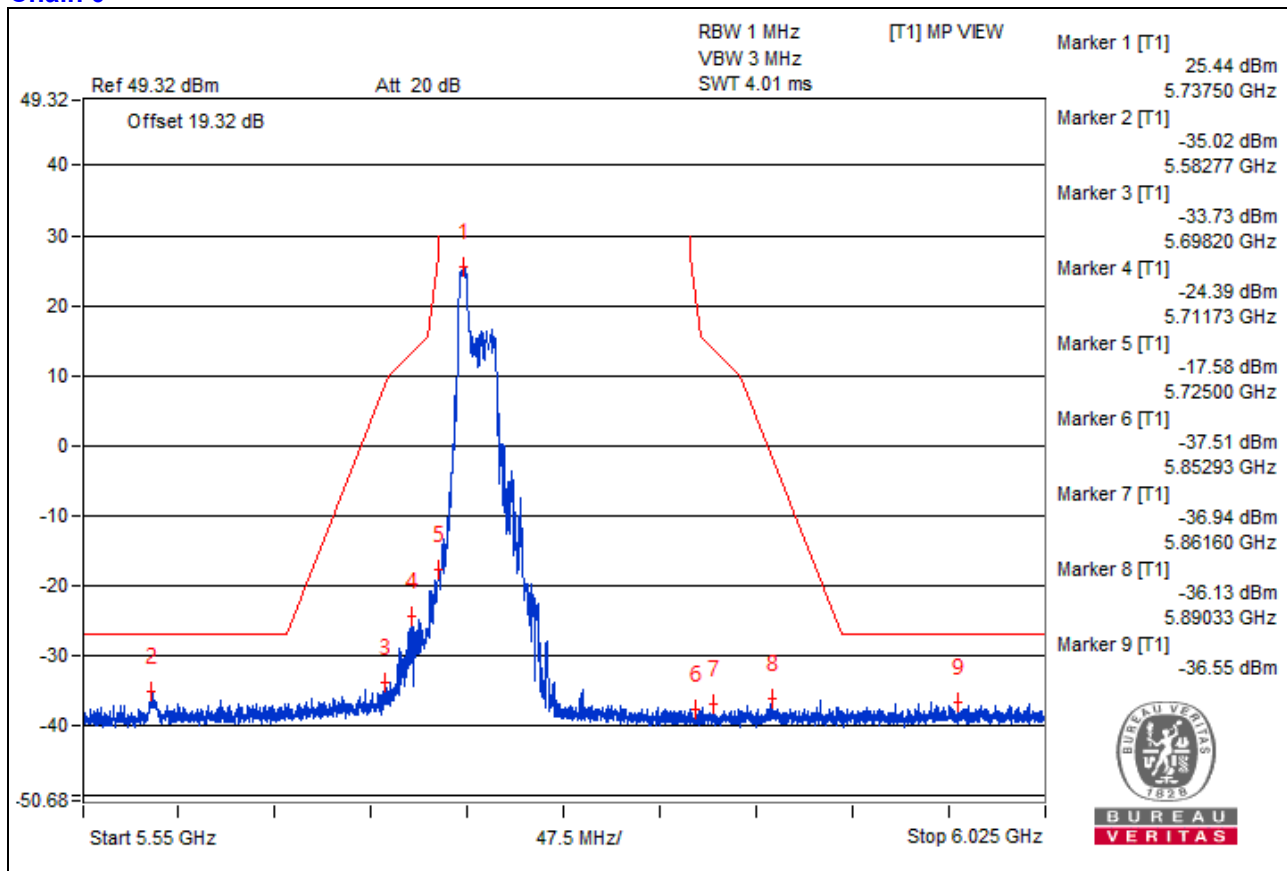

Chain 1

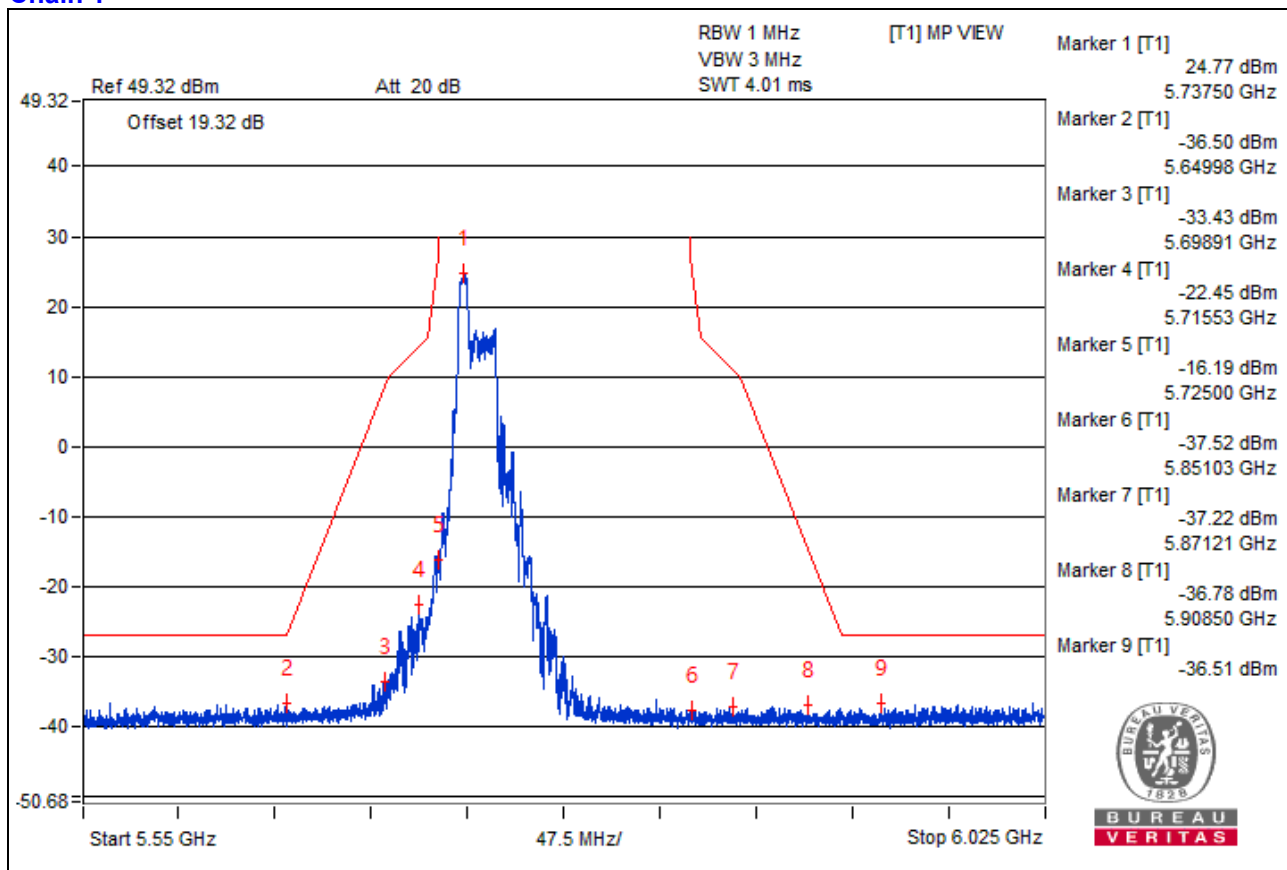

Channel 157


Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	1587.5 PK	60.26	74	-13.74	-46.18	-46.19	8.17	-35
2	1585.93 AV	48.25	54	-5.75	-58.89	-57.58	8.17	-47.01
3	7714.06 PK	48.62	74	-25.38	-57.35	-58.34	8.17	-46.64
4	7714.06 AV	36.86	54	-17.14	-69.81	-69.36	8.17	-58.4
5	11573.43 PK	50.04	74	-23.96	-55.33	-57.82	8.17	-45.22
6	11579.68 AV	38.67	54	-15.33	-67.88	-67.67	8.17	-56.59
7	17361.12 PK	52.81	68.2	-15.39	-54.55	-52.88	8.17	-42.45


Note :

1. Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8
d = measurement distance in 3 meters.
2. # : Non-restricted frequency, no limit for average emission.

Chain 0

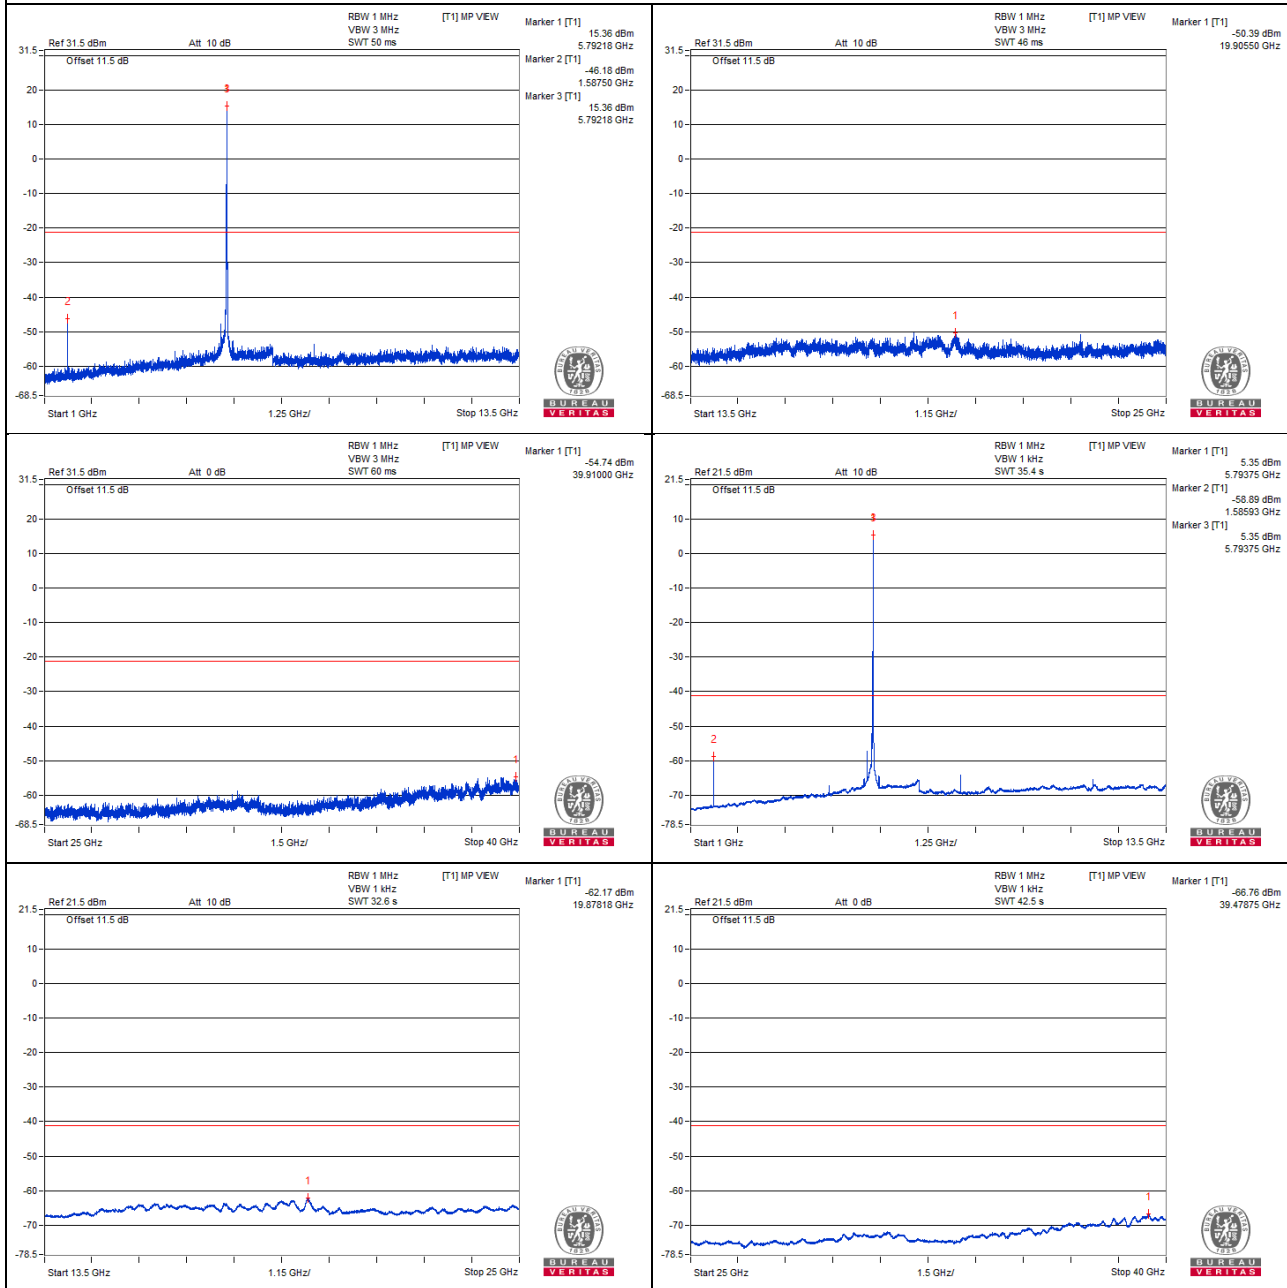


Chain 1

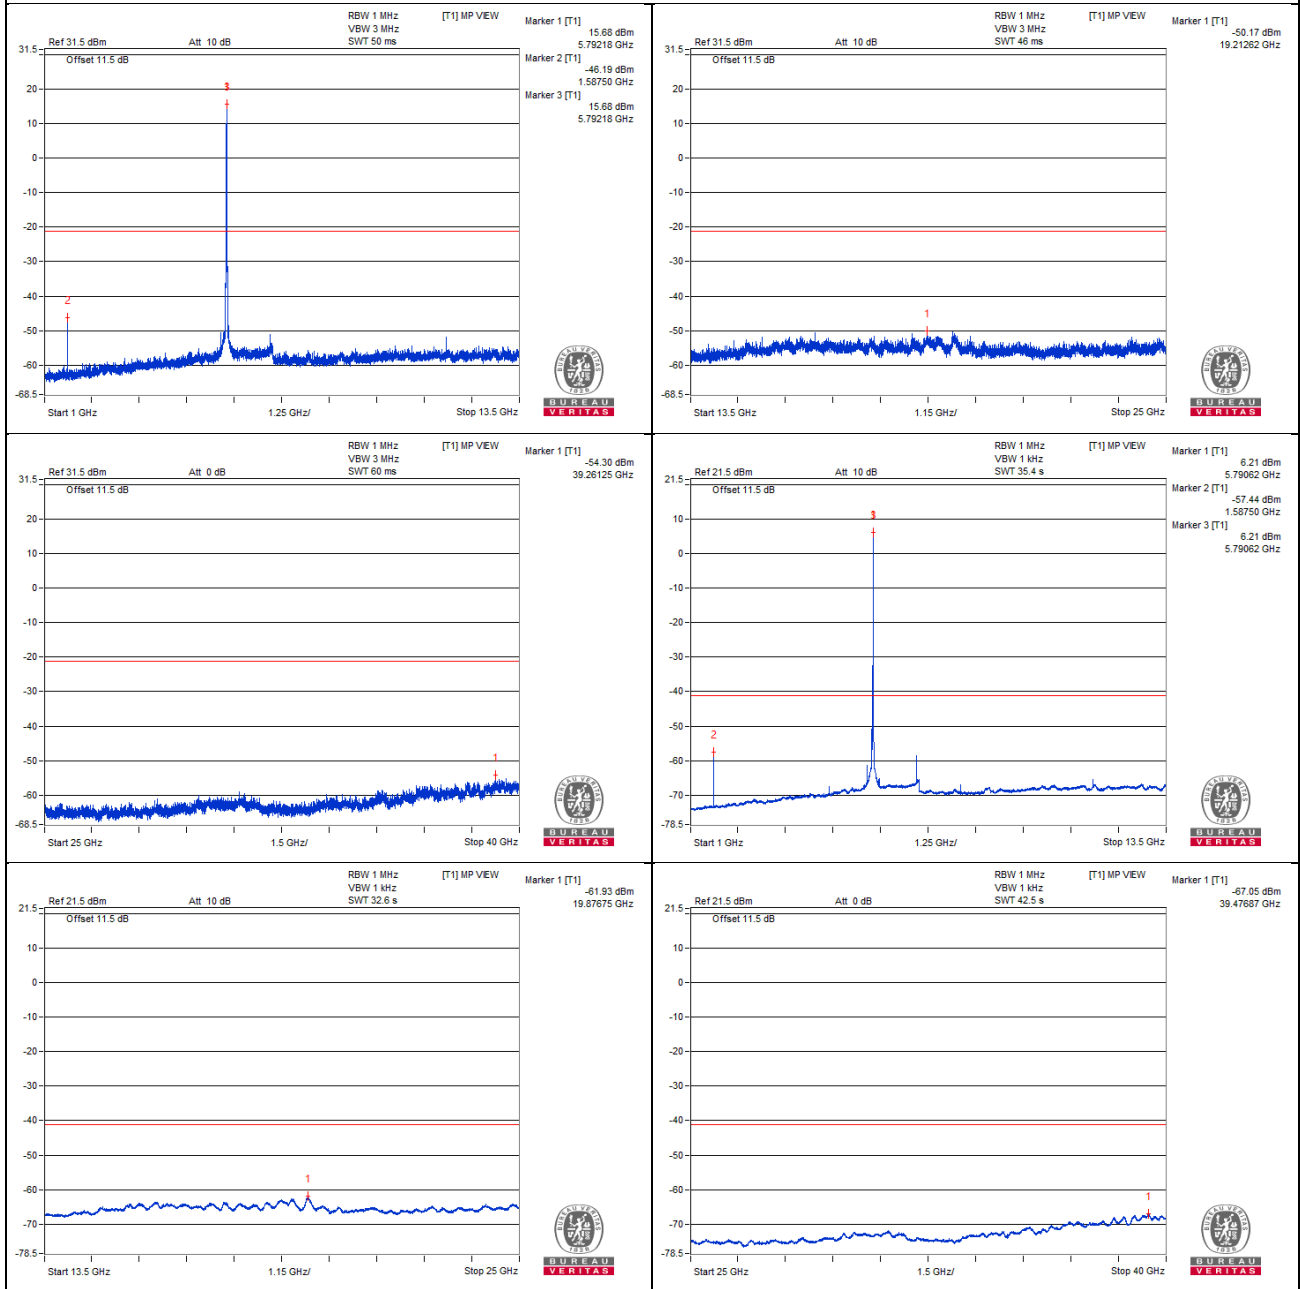


Bandedge table

Chain 0

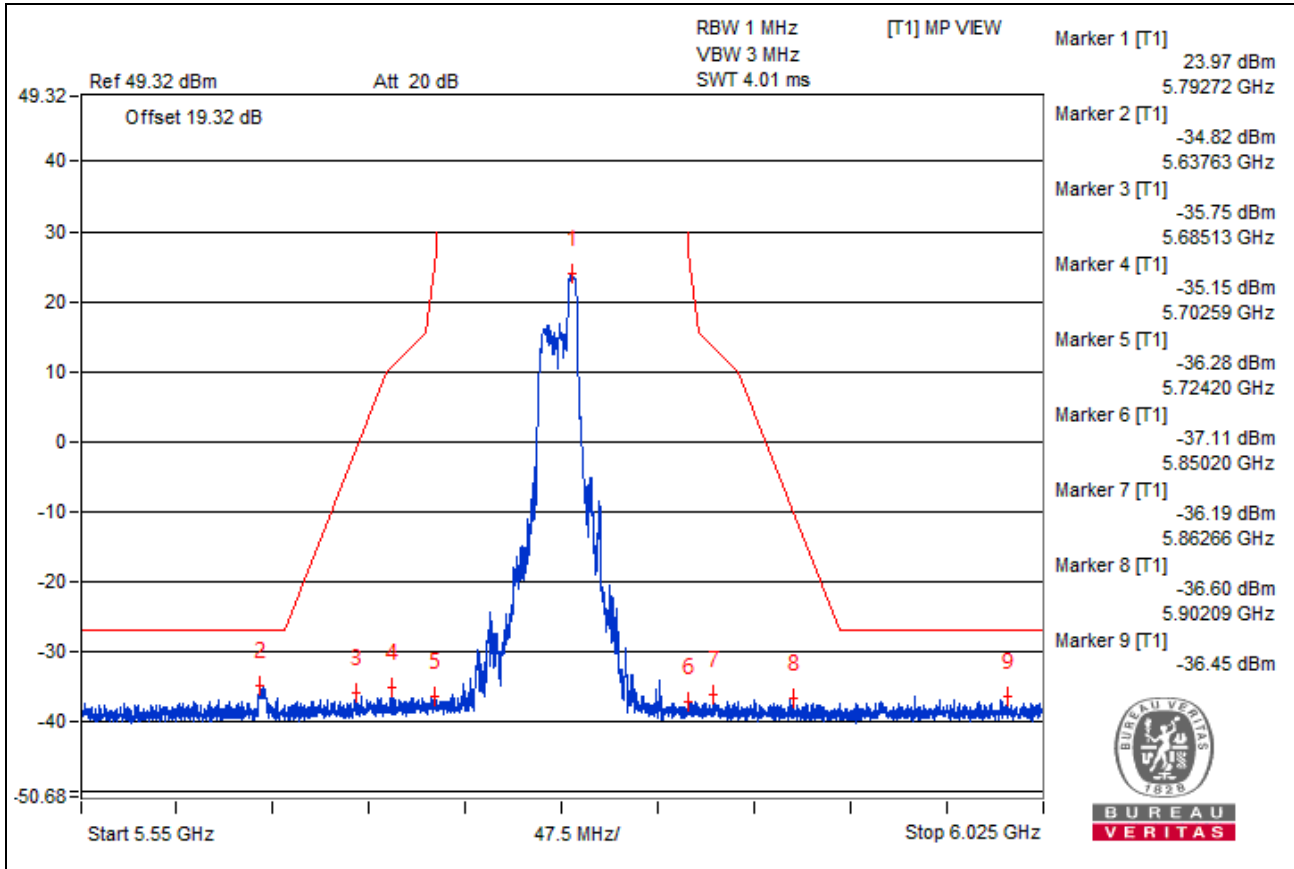

Chain 1

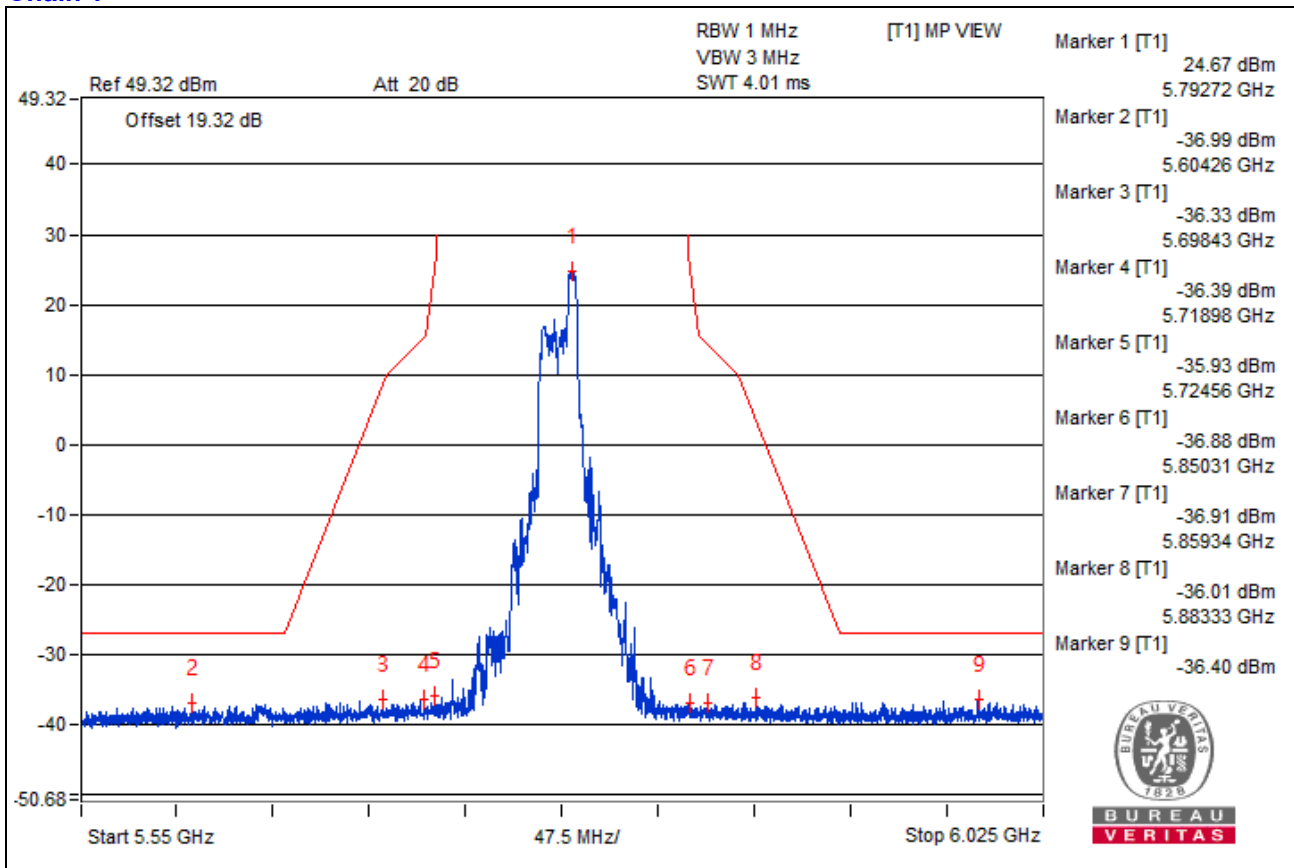

Channel 165


Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	1626.56 PK	60.18	68.2	-8.02	-46.71	-45.86	8.17	-35.08
2	7767.18 PK	48.74	68.2	-19.46	-57.55	-57.85	8.17	-46.52
3	11651.56 PK	51.41	74	-22.59	-55.52	-54.59	8.17	-43.85
4	11640.62 AV	39.56	54	-14.44	-66.73	-67.04	8.17	-55.7
5	17470.37 PK	53.02	68.2	-15.18	-53.03	-53.85	8.17	-42.24


Note :

1. Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8
d = measurement distance in 3 meters.
2. # : Non-restricted frequency, no limit for average emission.

Chain 0

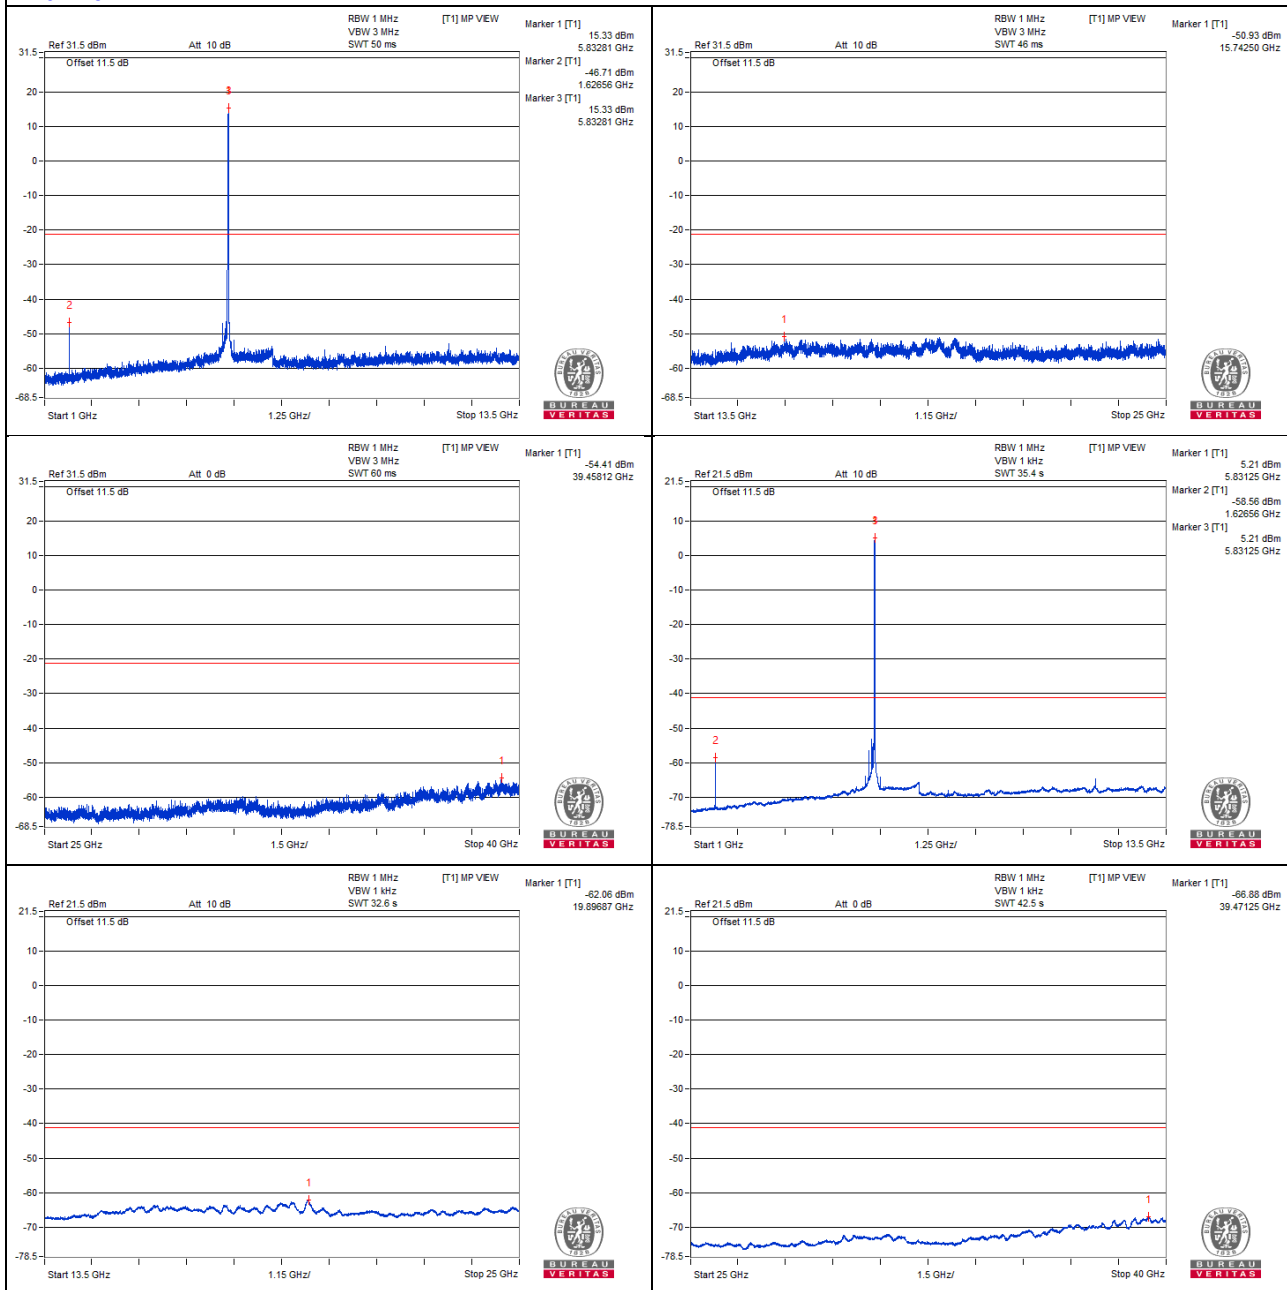


Chain 1

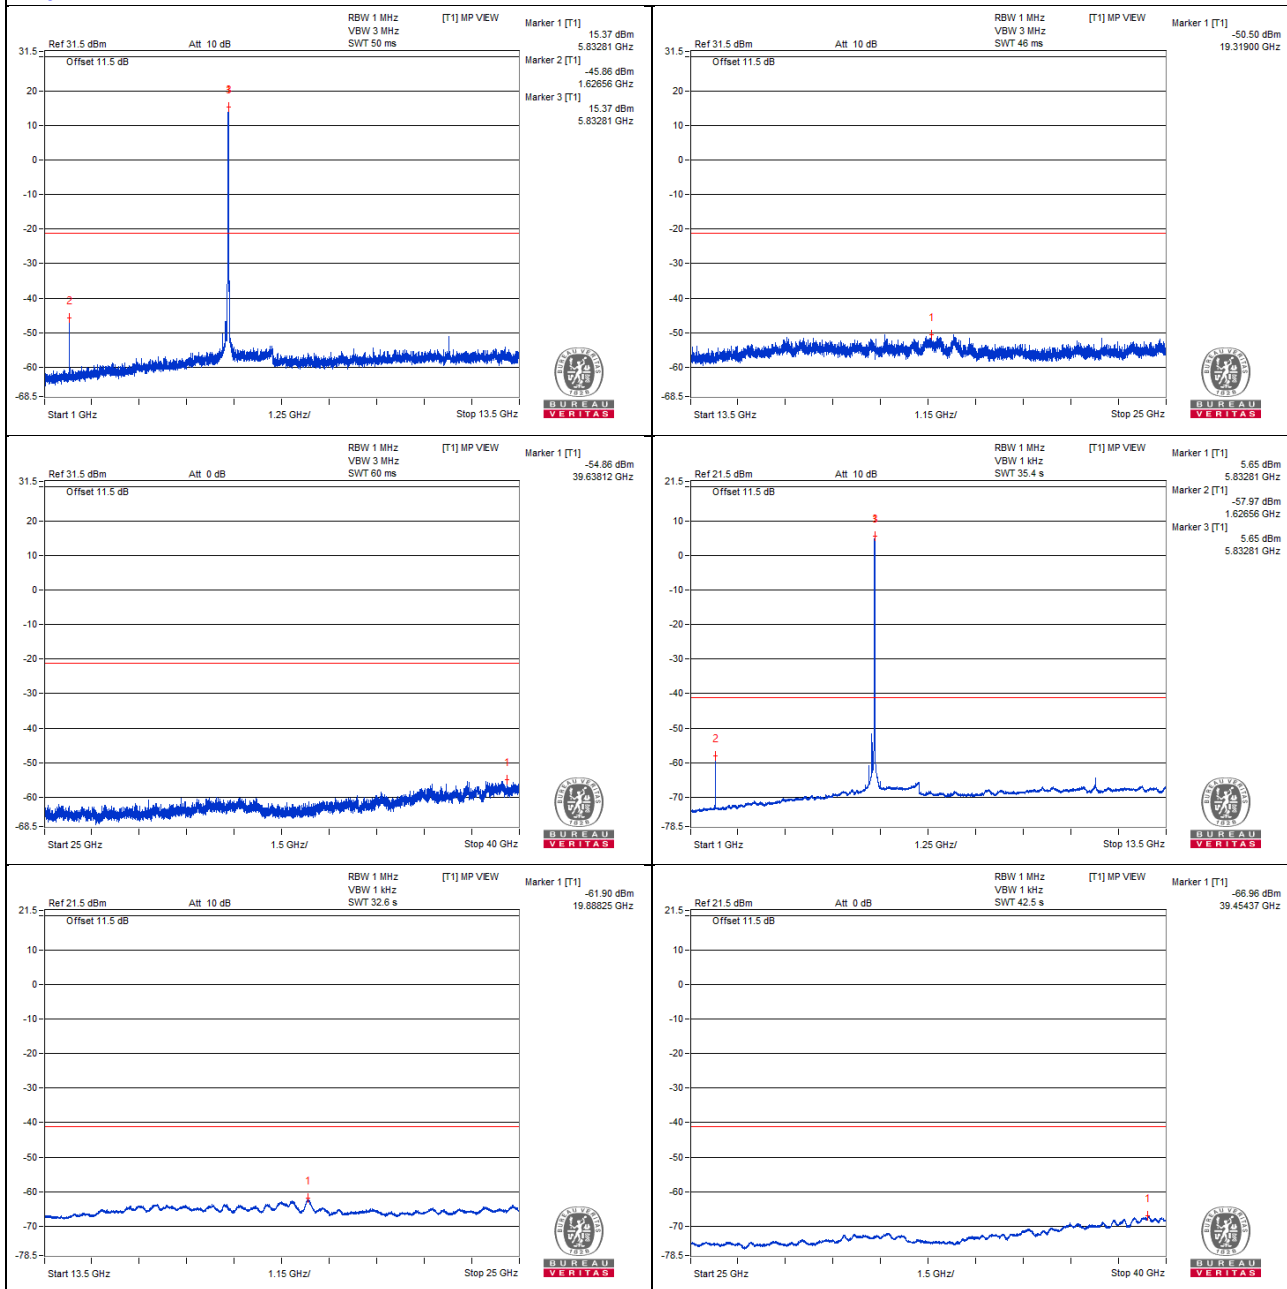


Bandedge table

Chain 0

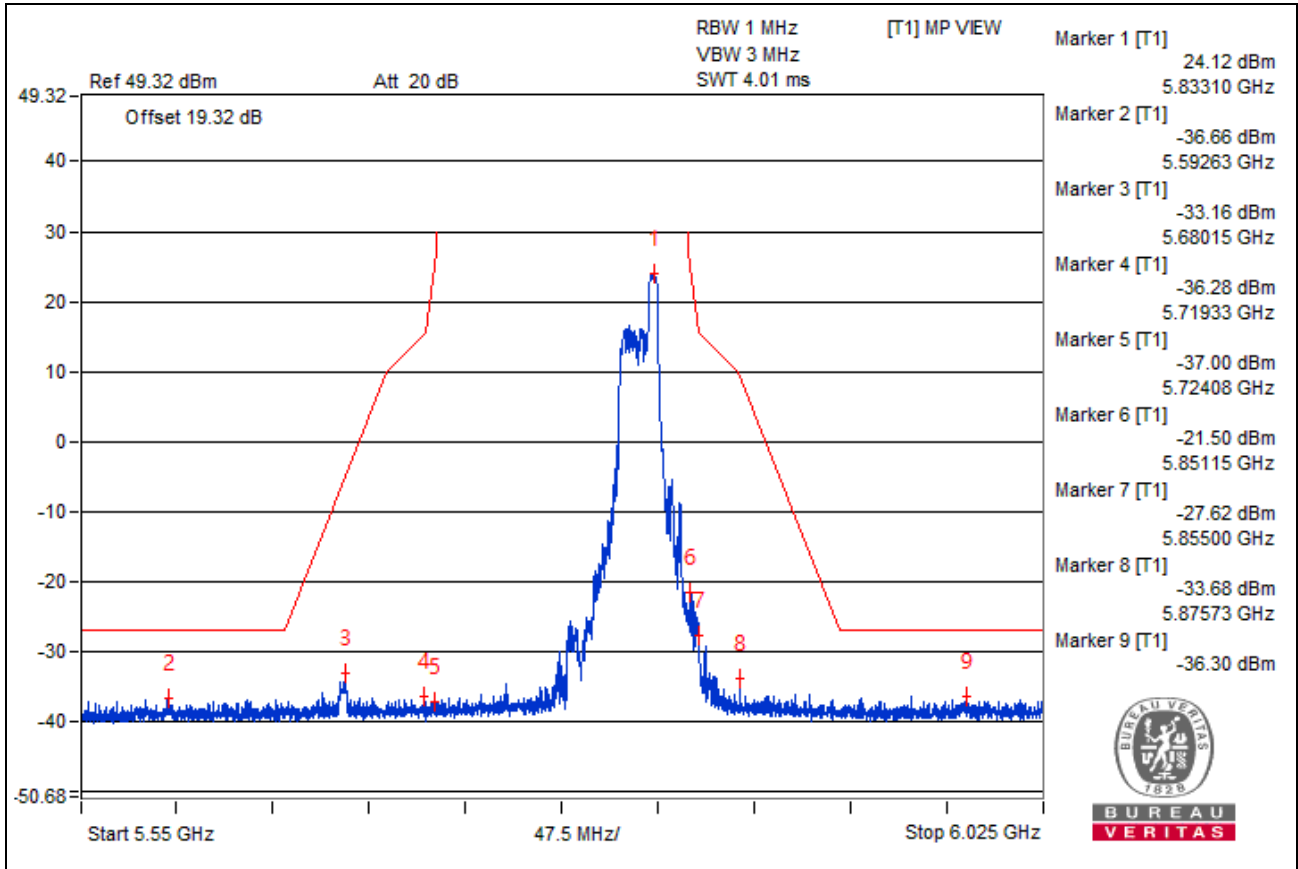

Chain 1

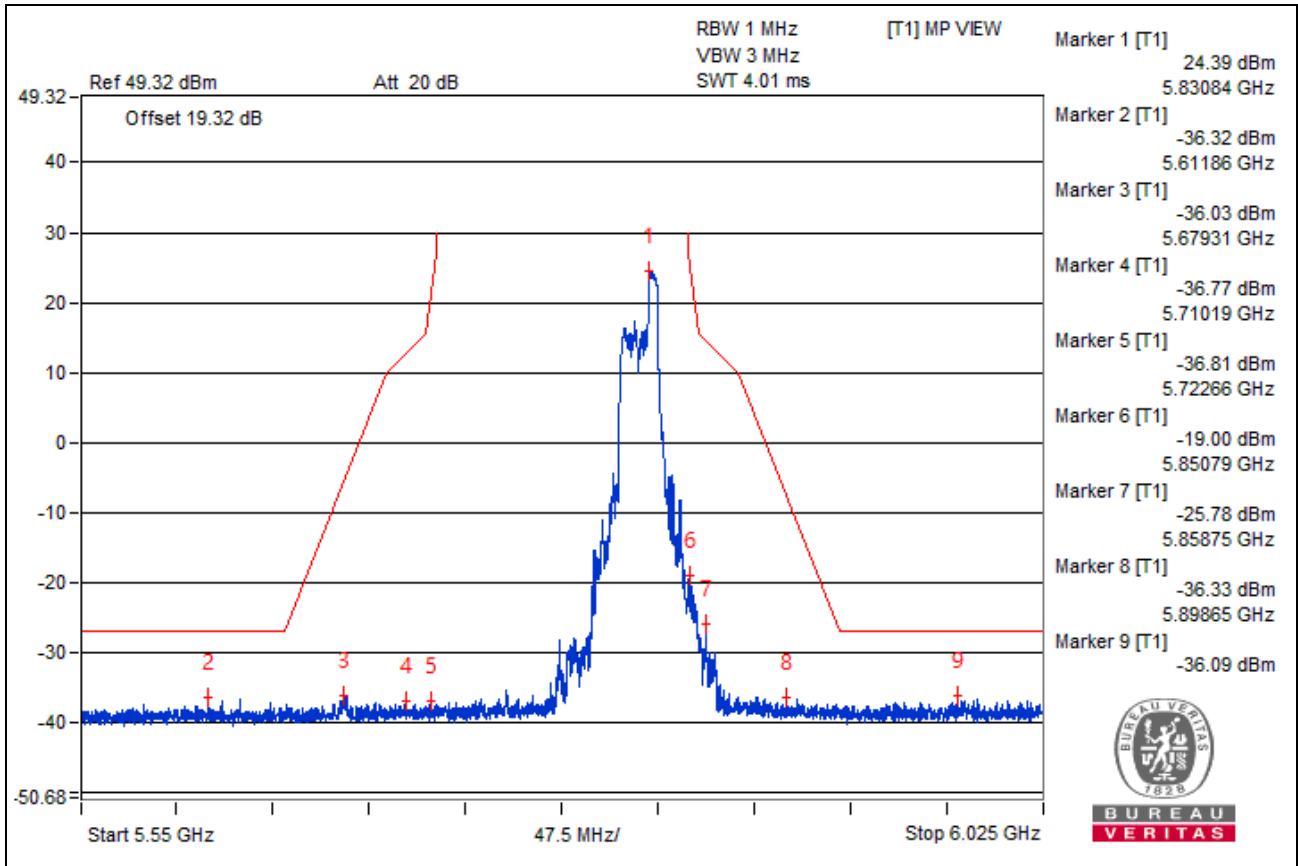

RU106

Channel 36


Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	1003.12 PK	53.18	74	-20.82	-53.2	-53.33	8.17	-42.08
2	1003.12 AV	42.49	54	-11.51	-63.94	-63.96	8.17	-52.77
3	6906.25 PK	61.1	68.2	-7.1	-45.69	-45.02	8.17	-34.16
4	10350 PK	61	68.2	-7.2	-45.64	-45.25	8.17	-34.26
5	15542.68 PK	62.63	74	-11.37	-44.68	-43.09	8.17	-32.63
6	15541.25 AV	41.98	54	-12.02	-64.37	-64.55	8.17	-53.28


Note :

1. Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8
d = measurement distance in 3 meters.
2. # : Non-restricted frequency, no limit for average emission.

Chain 0

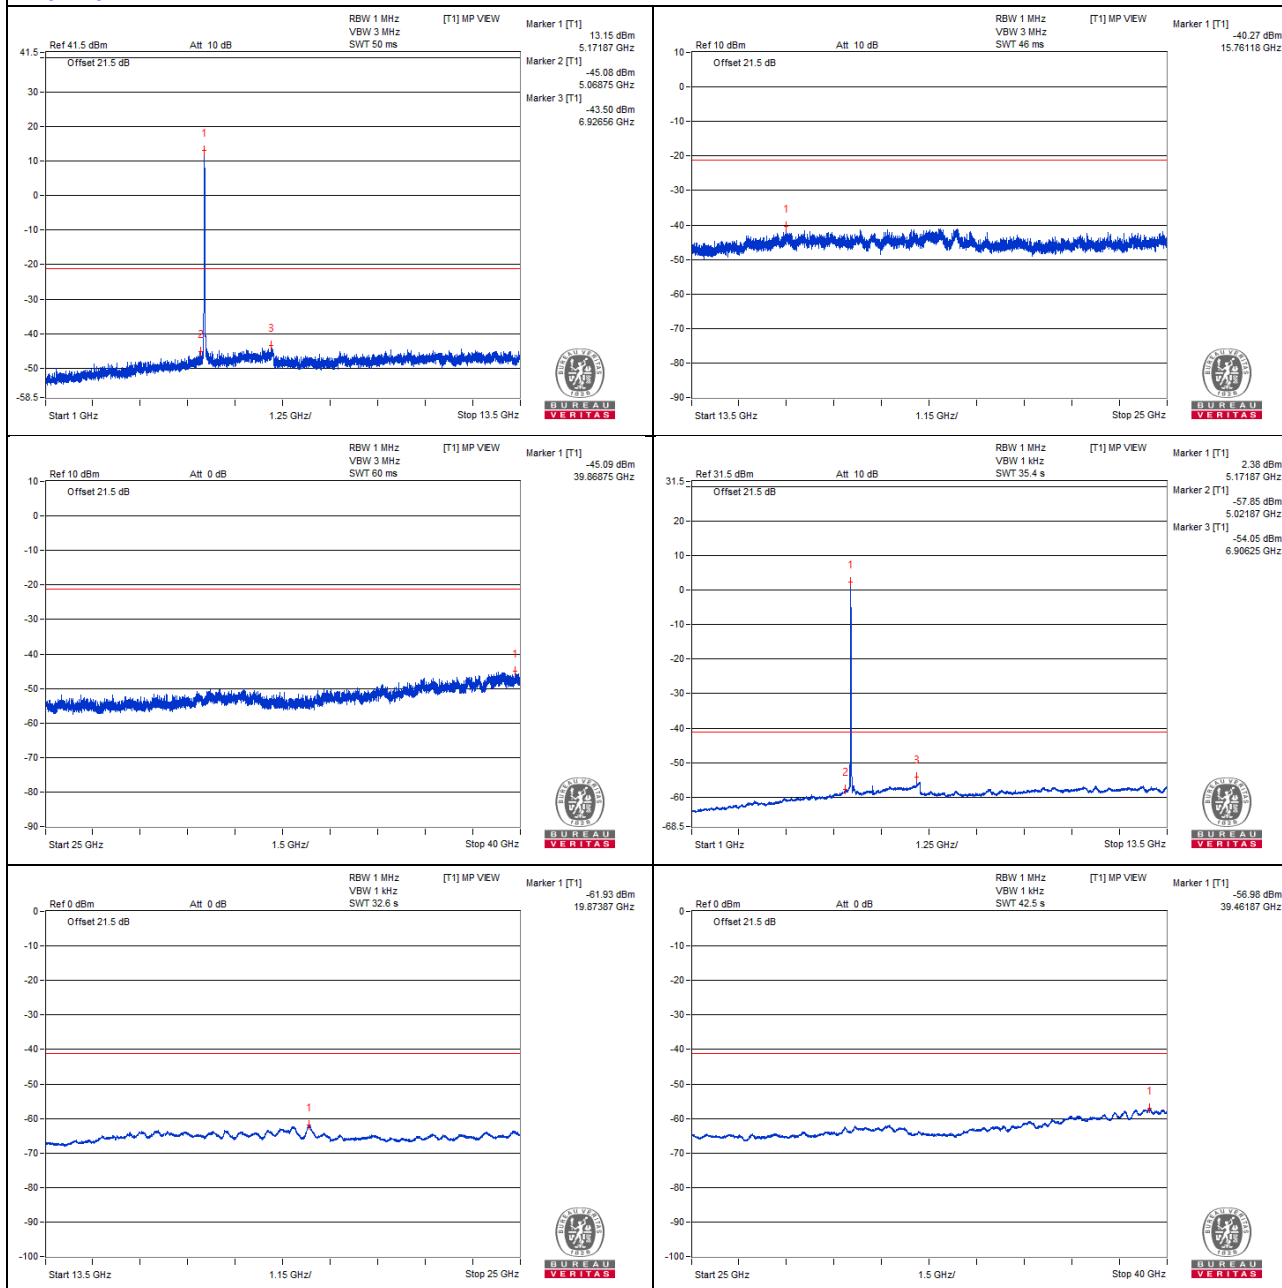

Chain 1

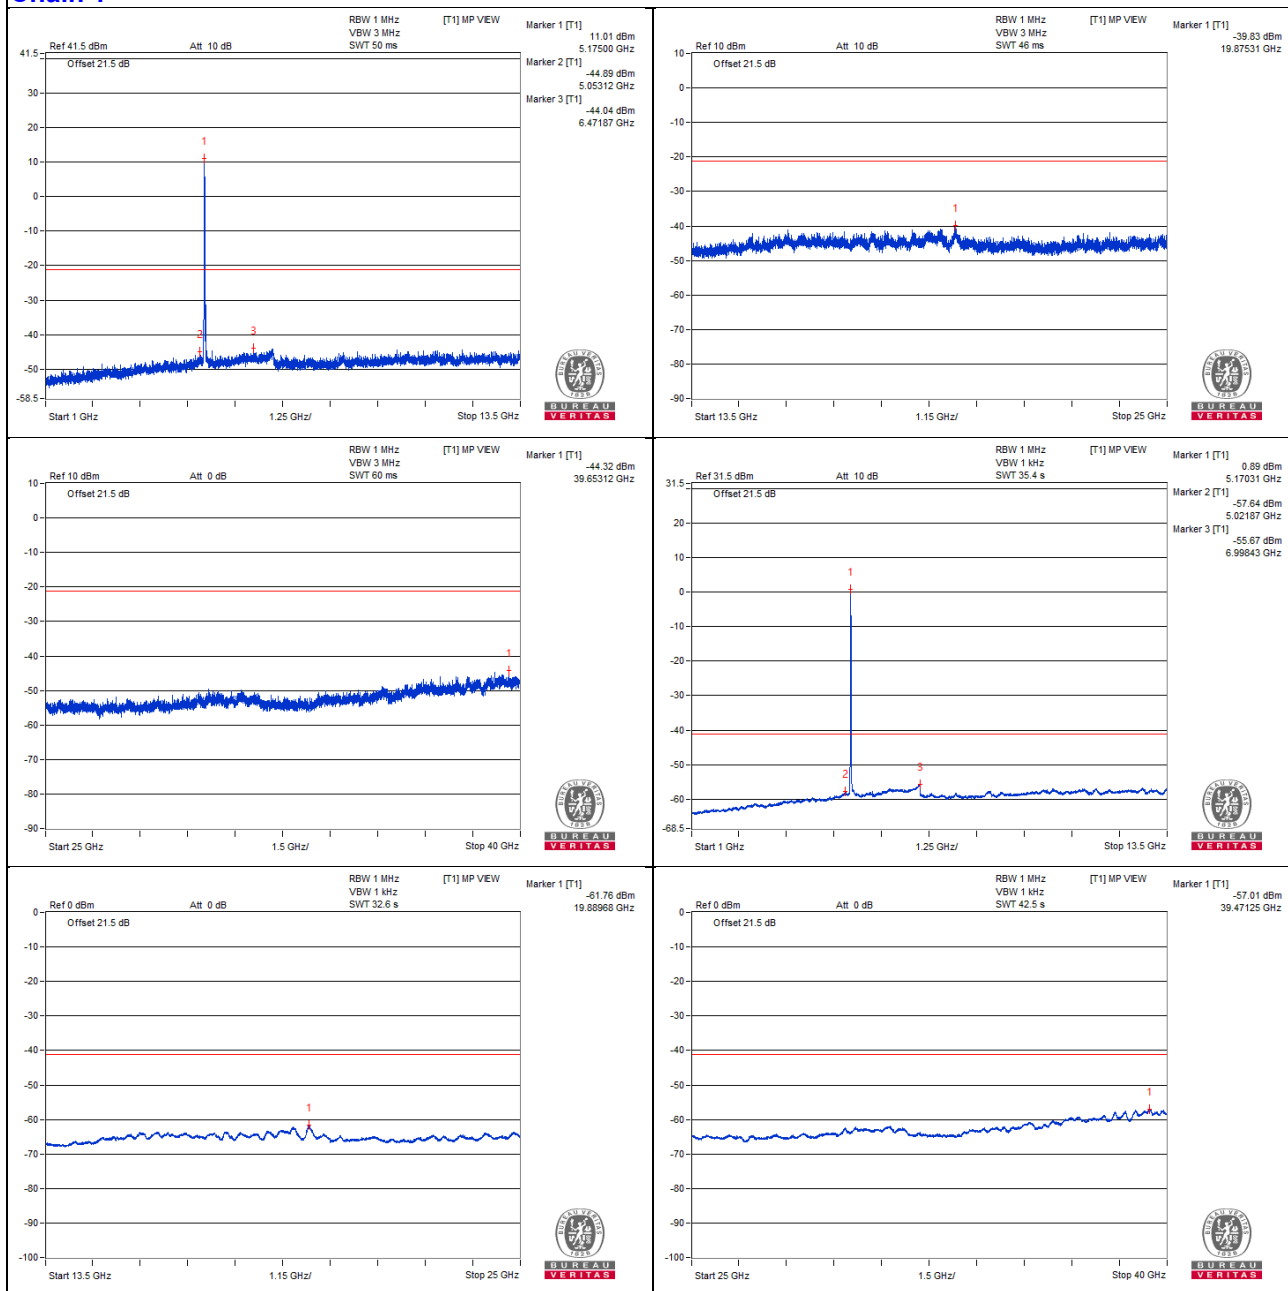

Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5149.15 PK	74.89	74	*0.89	-29.05	-30.55	6.36	-20.37
2	5149.95 AV	50.05	54	-3.95	-54.35	-54.82	6.36	-45.21


Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8


d = measurement distance in 3 meters.

* The unwanted emission was verified and the test result was passed by radiated measurement.
(Please refer APPENDIX B)

Chain 0

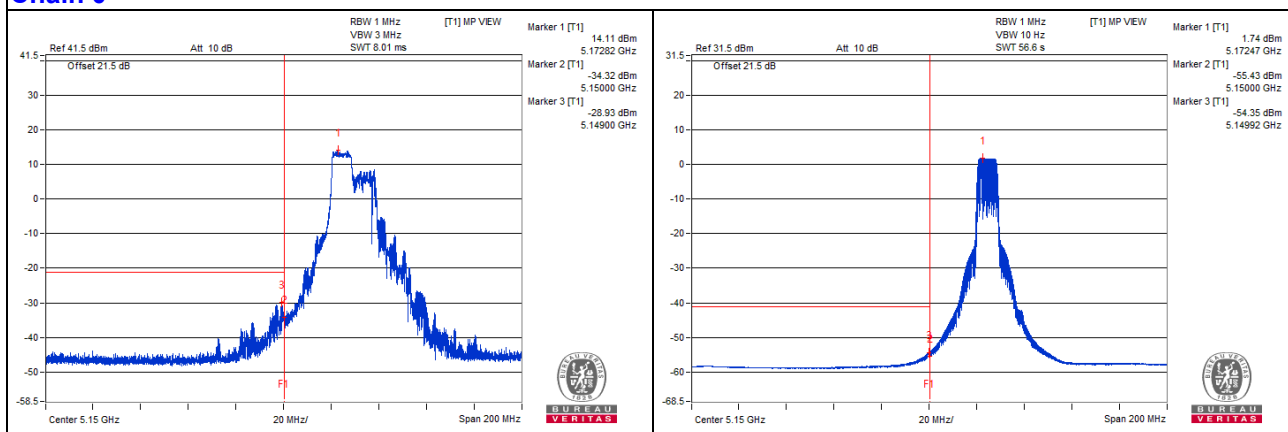

Chain 1

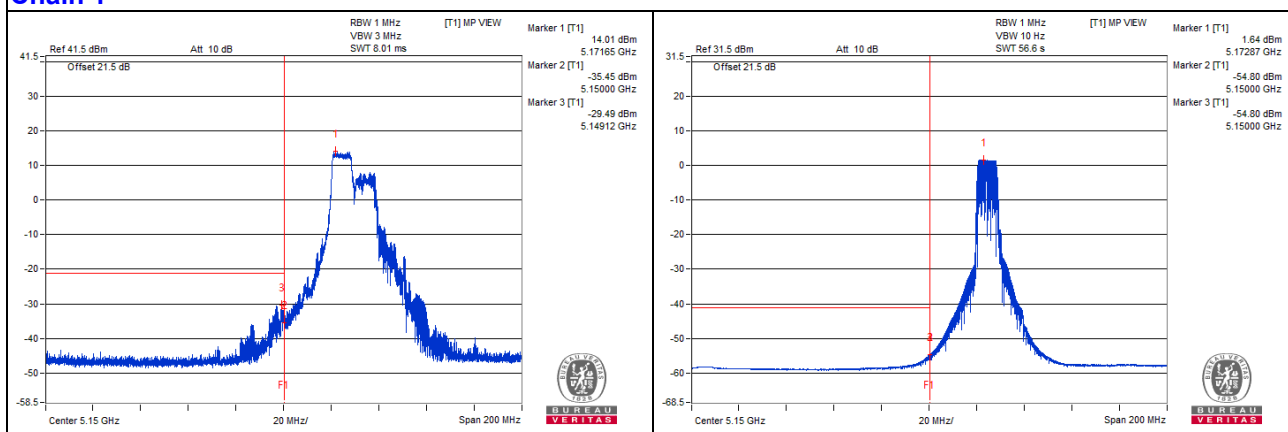

Channel 40


Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	1004.68 PK	53.39	74	-20.61	-52.88	-53.22	8.17	-41.87
2	1003.12 AV	42.48	54	-11.52	-64.01	-63.92	8.17	-52.78
3	6932.81 PK	61.36	68.2	-6.84	-45.04	-45.13	8.17	-33.9
4	10409.37 PK	59.87	68.2	-8.33	-46.03	-47.18	8.17	-35.39
5	15595.87 PK	62.73	74	-11.27	-42.98	-44.59	8.17	-32.53
6	15590.12 AV	41.52	54	-12.48	-64.82	-65.02	8.17	-53.74


Note :

1. Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8
d = measurement distance in 3 meters.
2. # : Non-restricted frequency, no limit for average emission.

Chain 0

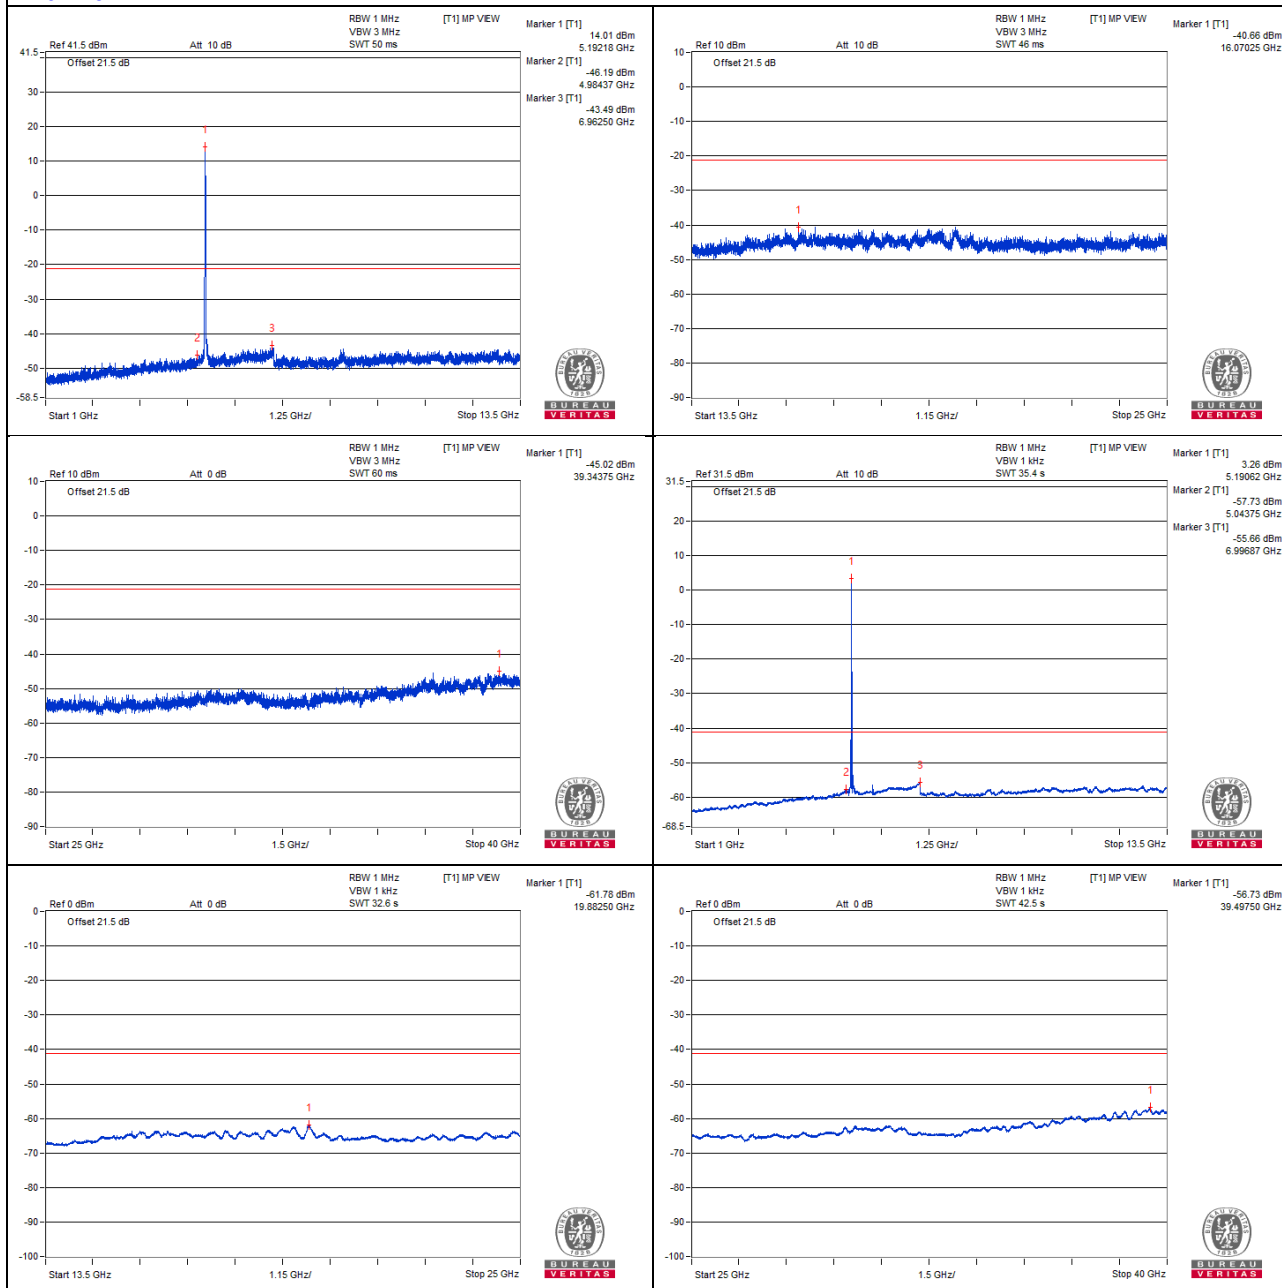

Chain 1

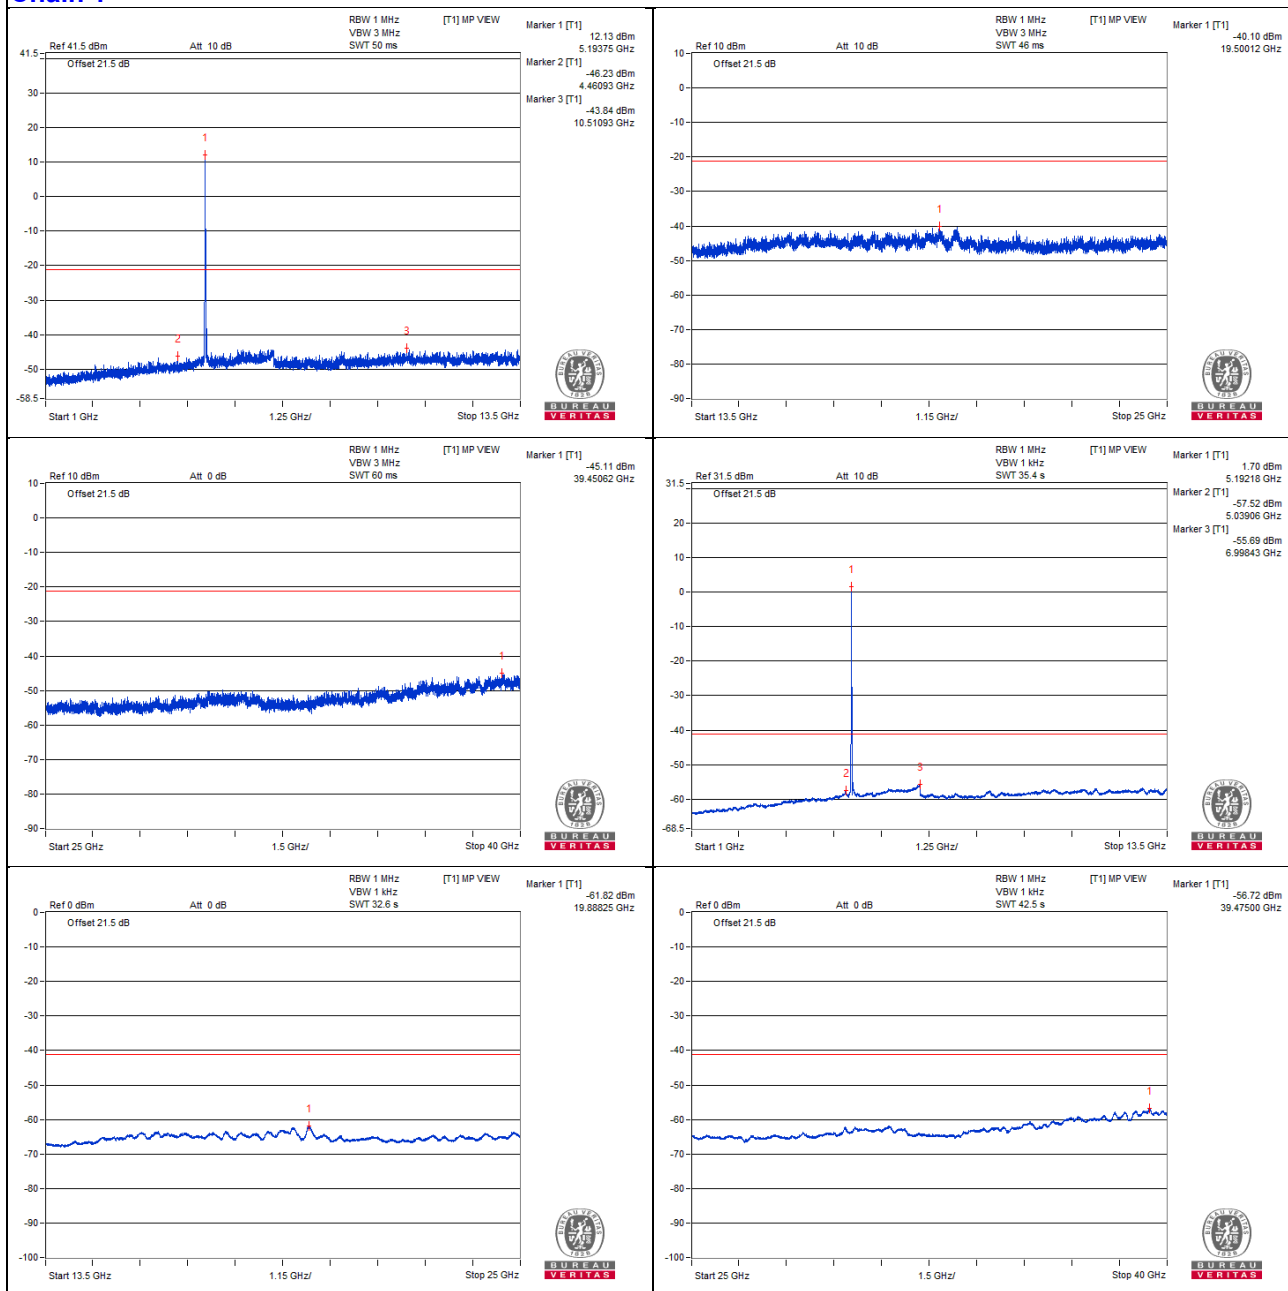

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5142.35 PK	60.84	74	-13.16	-43.29	-44.36	6.36	-34.42
2	5149.32 AV	46.26	54	-7.74	-57.99	-58.79	6.36	-49

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

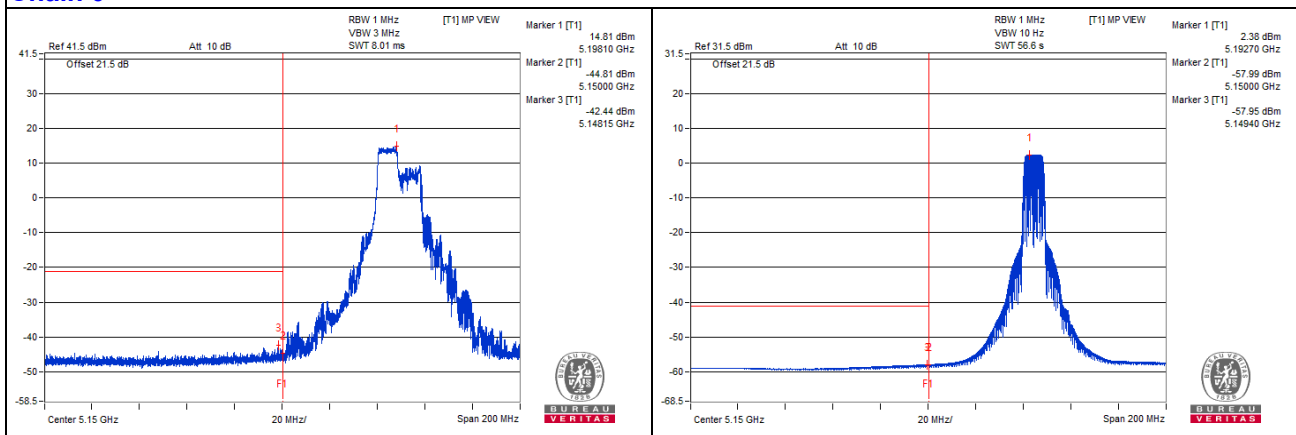

Chain 1

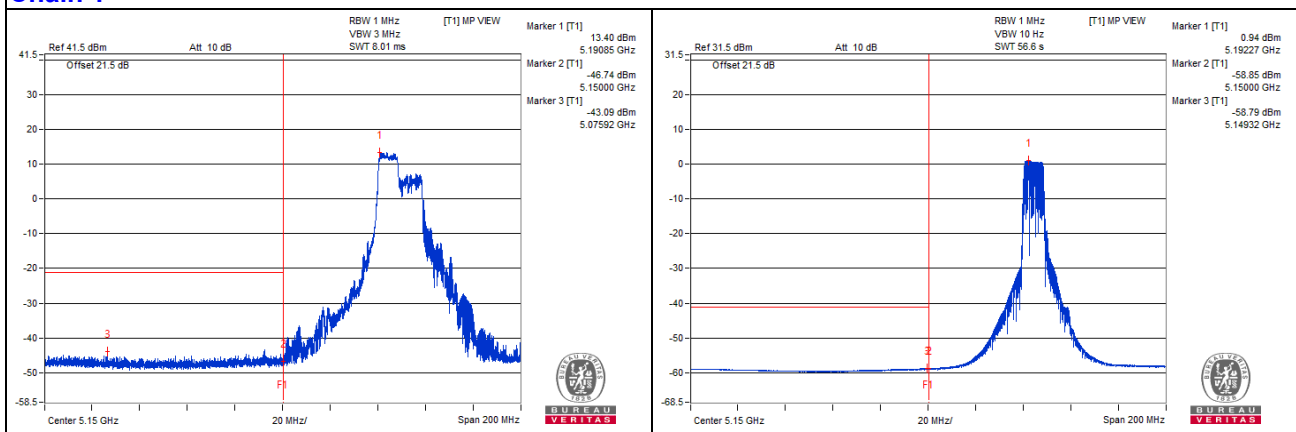

Channel 48


Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	1042.18 PK	54.92	74	-19.08	-52.33	-50.83	8.17	-40.34
2	1040.62 AV	44.56	54	-9.44	-61.21	-62.67	8.17	-50.7
3	6987.5 PK	62.23	68.2	-5.97	-44.91	-43.61	8.17	-33.03
4	10489.06 PK	60.28	68.2	-7.92	-46.42	-45.92	8.17	-34.98
5	15720.93 PK	63.36	74	-10.64	-42.43	-43.84	8.17	-31.9
6	15729.56 AV	42.11	54	-11.89	-64.1	-64.58	8.17	-53.15


Note :

1. Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8
d = measurement distance in 3 meters.
2. # : Non-restricted frequency, no limit for average emission.

Chain 0

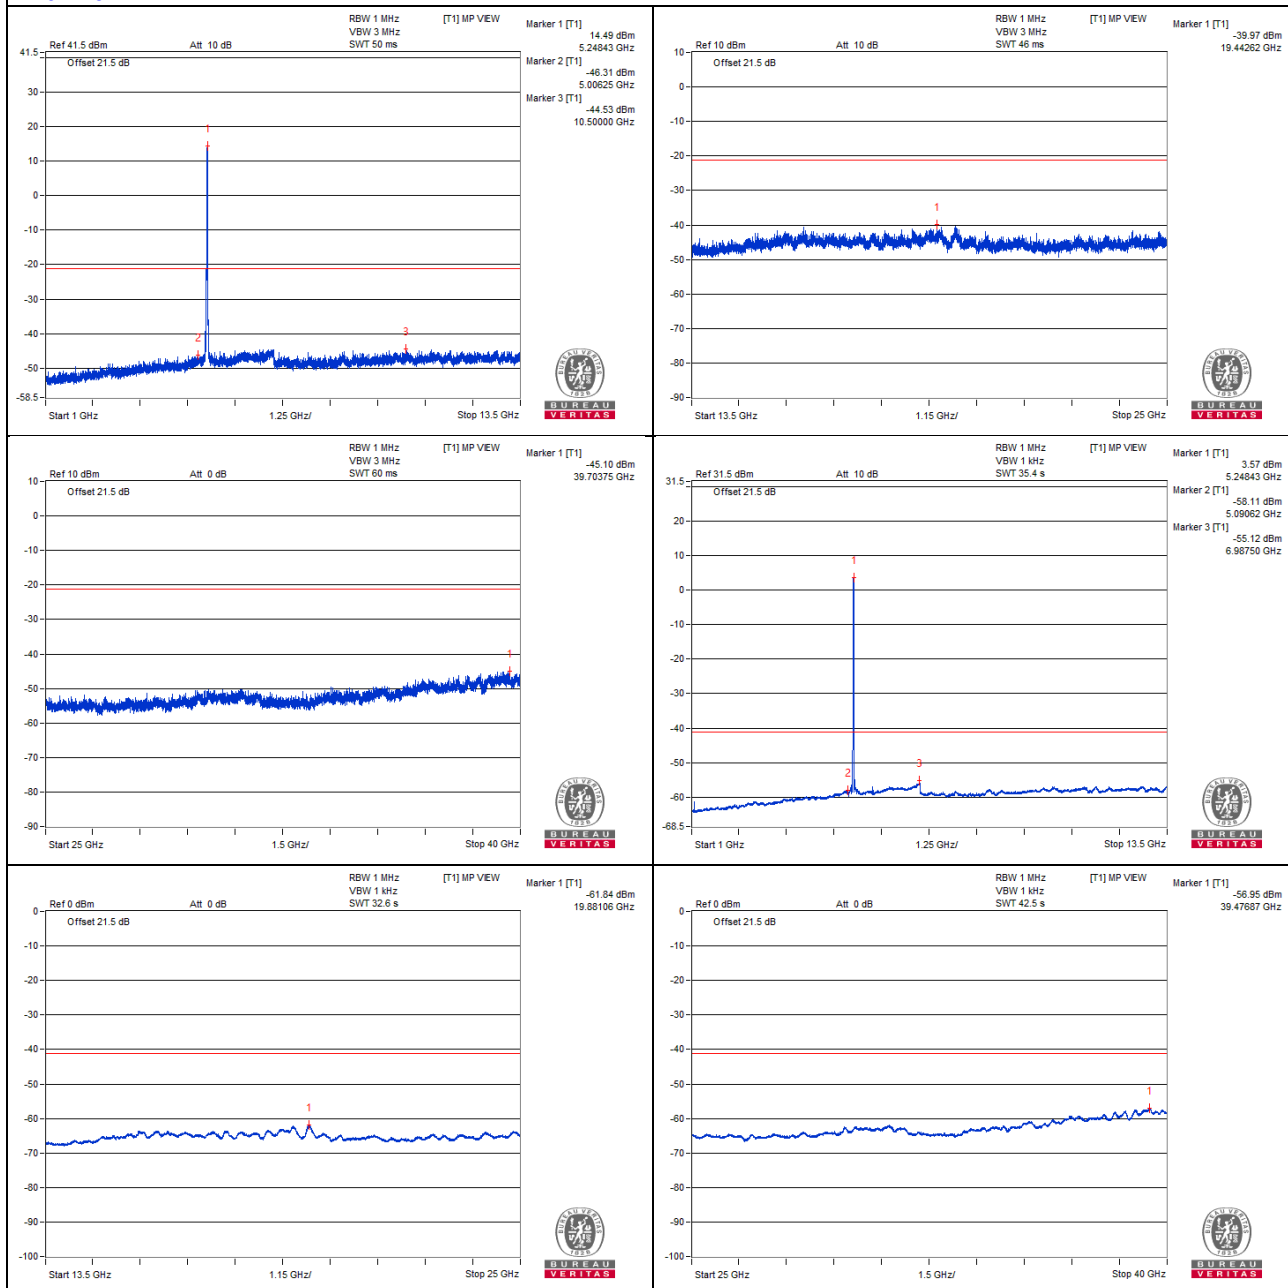

Chain 1

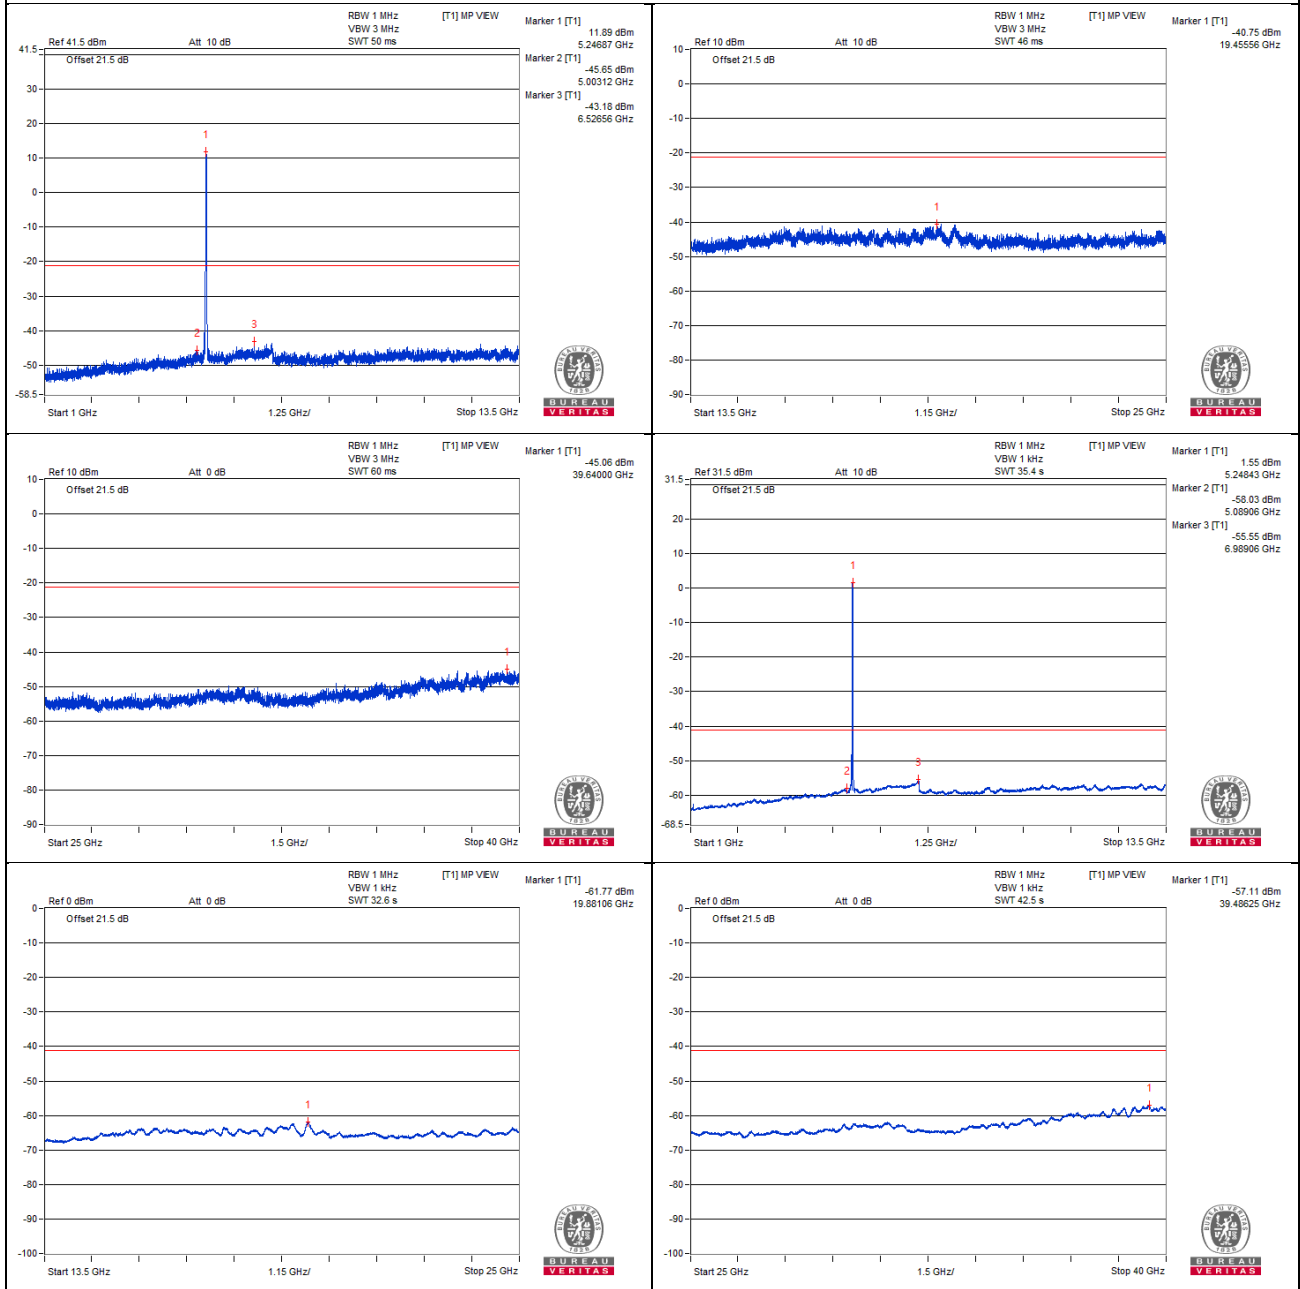

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5089.37 PK	60.2	74	-13.8	-44.24	-44.62	6.36	-35.06
2	5094.85 AV	45.98	54	-8.02	-58.71	-58.59	6.36	-49.28

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

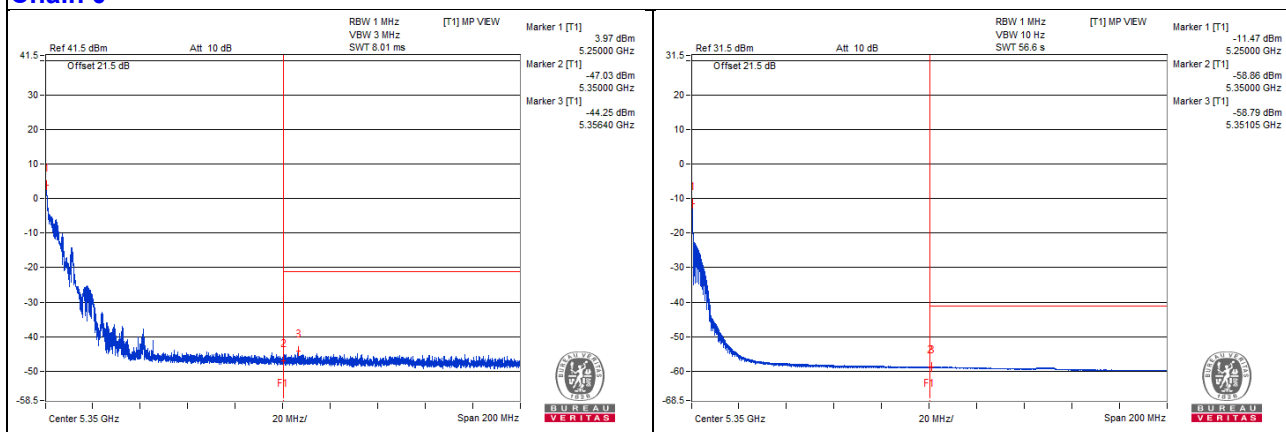

Chain 1

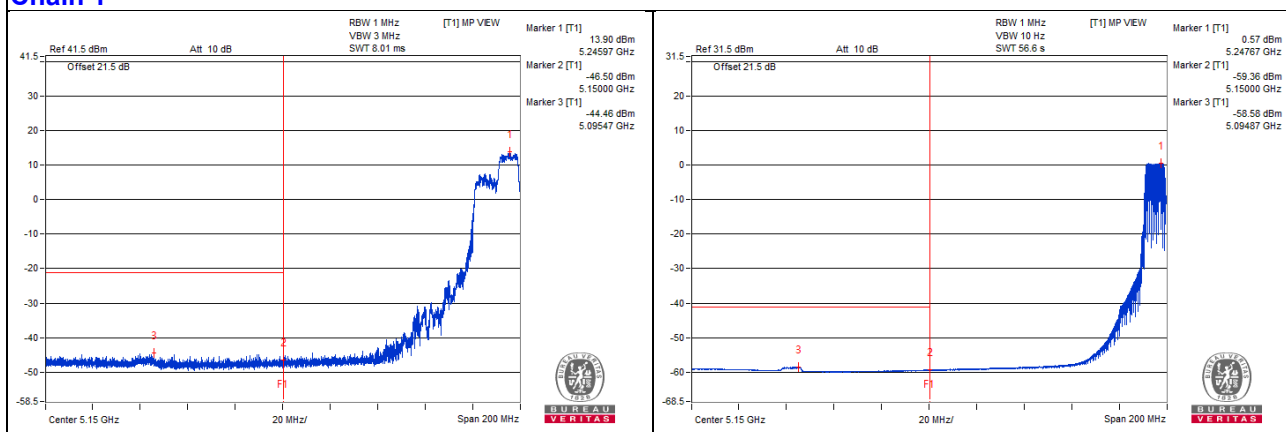

Channel 52

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	1050 PK	55.13	74	-18.87	-51.6	-51.04	8.17	-40.13
2	1048.43 AV	44.34	54	-9.66	-61.36	-62.99	8.17	-50.92
3	7017.18 PK	59.33	68.2	-8.87	-46.3	-48.1	8.17	-35.93
4	10512.5 PK	59.83	68.2	-8.37	-47.68	-45.75	8.17	-35.43
5	15771.25 PK	63.38	74	-10.62	-43.56	-42.62	8.17	-31.88
6	15774.12 AV	42.62	54	-11.38	-63.8	-63.85	8.17	-52.64


Note :

1. Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8


d = measurement distance in 3 meters.

2. # : Non-restricted frequency, no limit for average emission.

Chain 0

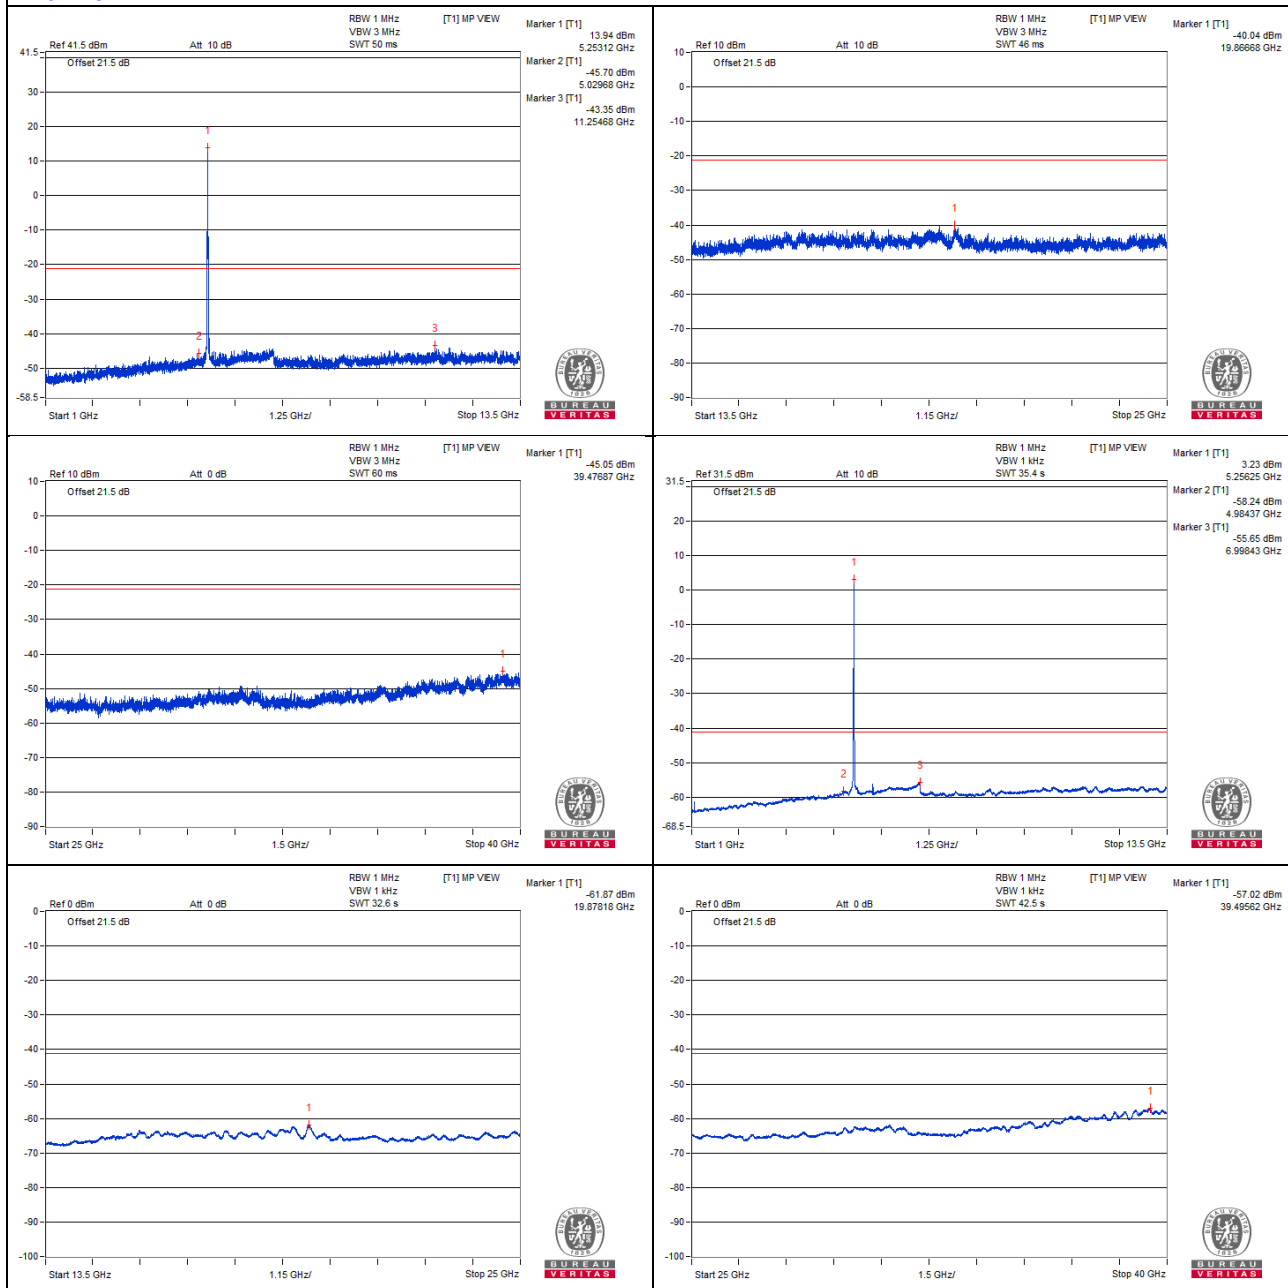

Chain 1

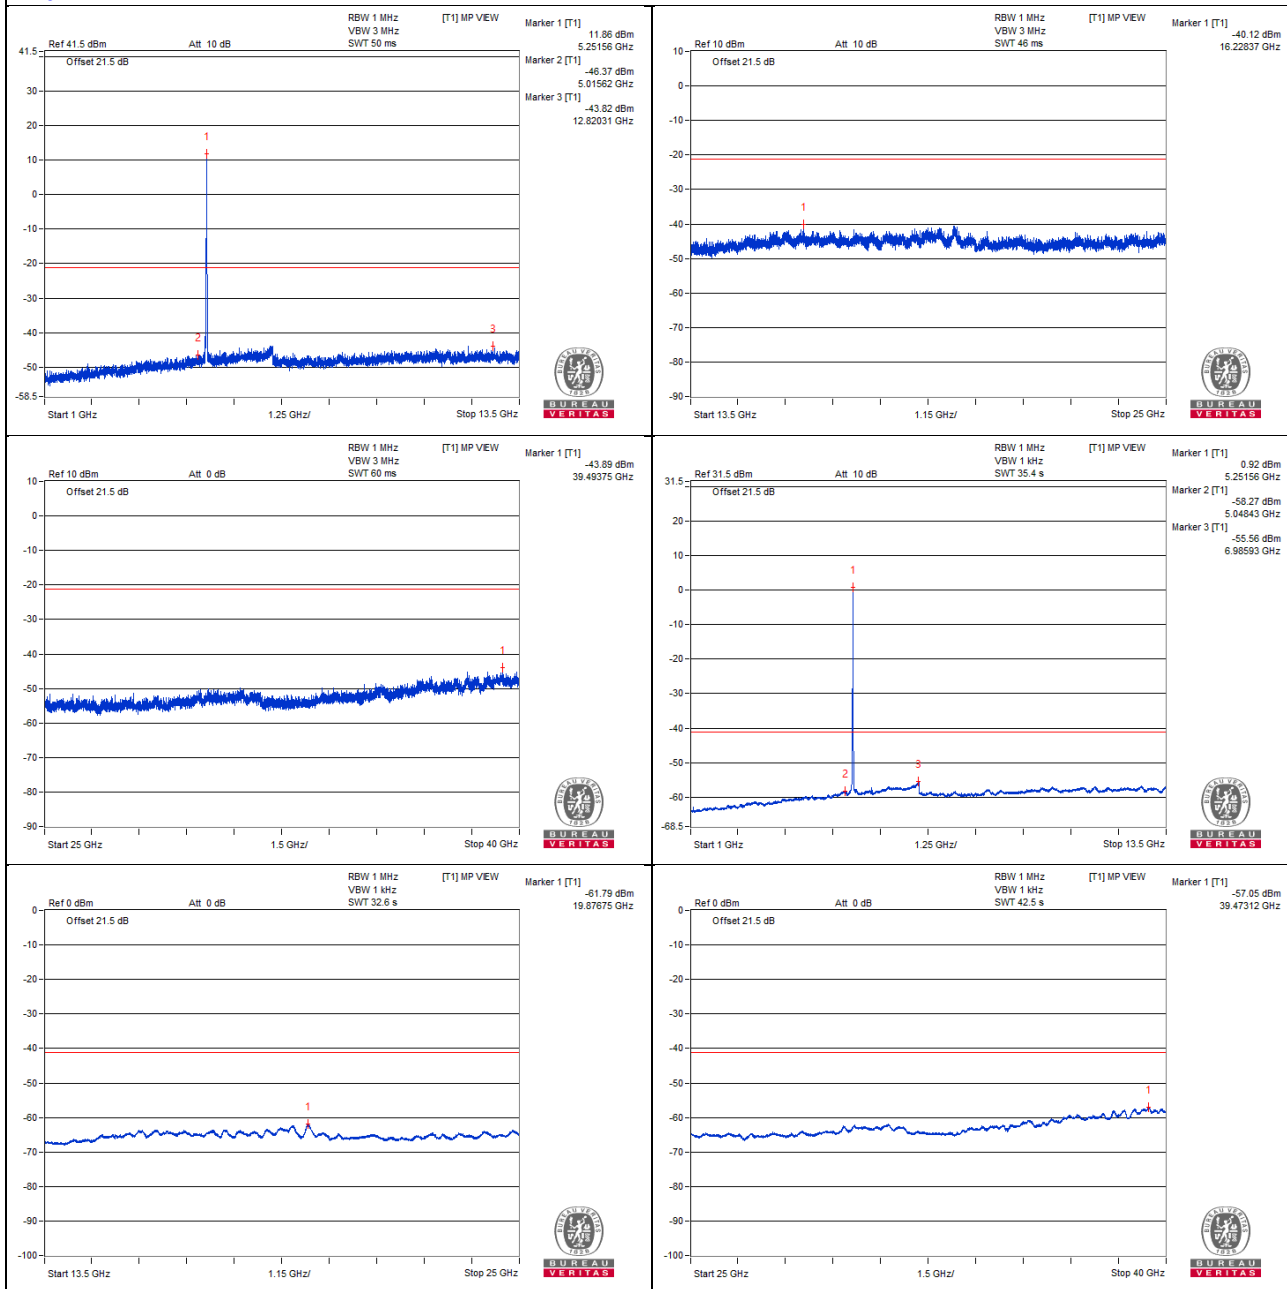

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5361.35 PK	59.68	74	-14.32	-43.32	-47.85	6.43	-35.58
2	5350.07 AV	46.09	54	-7.91	-58.38	-58.86	6.43	-49.17

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

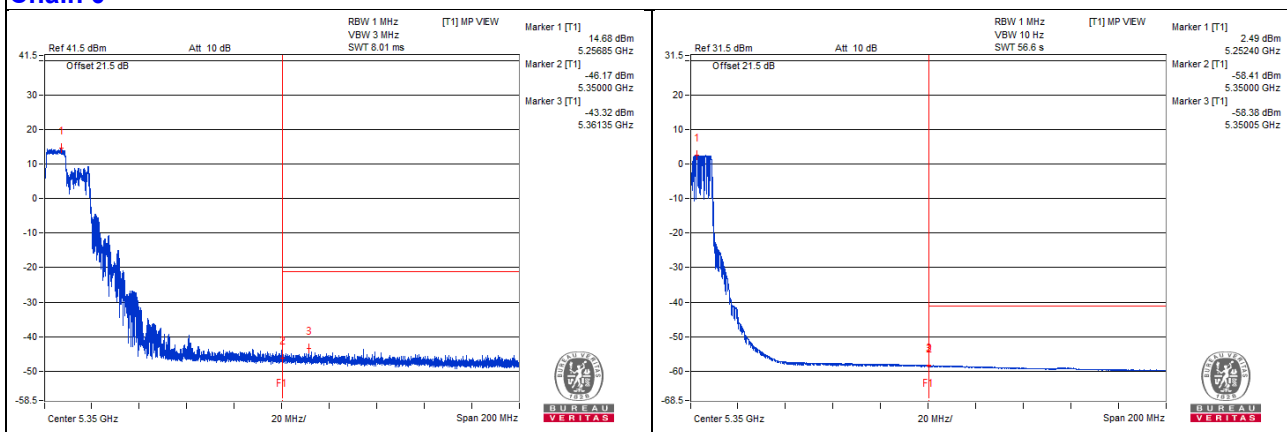

Chain 1

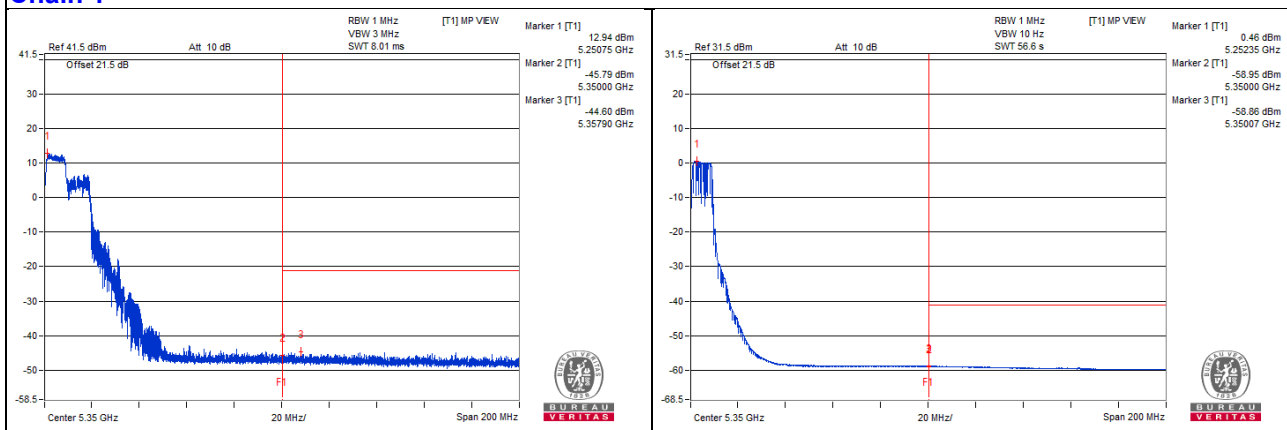

Channel 60

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	1100 PK	54.39	74	-19.61	-51.25	-53.04	8.17	-40.87
2	1100 AV	44.21	54	-9.79	-61.53	-63.07	8.17	-51.05
3	7065.62 PK	58.8	68.2	-9.4	-46.81	-48.67	8.17	-36.46
4	10607.81 PK	60	74	-14	-47.42	-45.64	8.17	-35.26
5	10607.43 AV	48.84	54	-5.16	-57.44	-57.77	8.17	-46.42
6	15894.87 PK	63.27	74	-10.73	-43.77	-42.64	8.17	-31.99
7	15892 AV	42.07	54	-11.93	-64.39	-64.35	8.17	-53.19


Note :

1. Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8


d = measurement distance in 3 meters.

2. # : Non-restricted frequency, no limit for average emission.

Chain 0

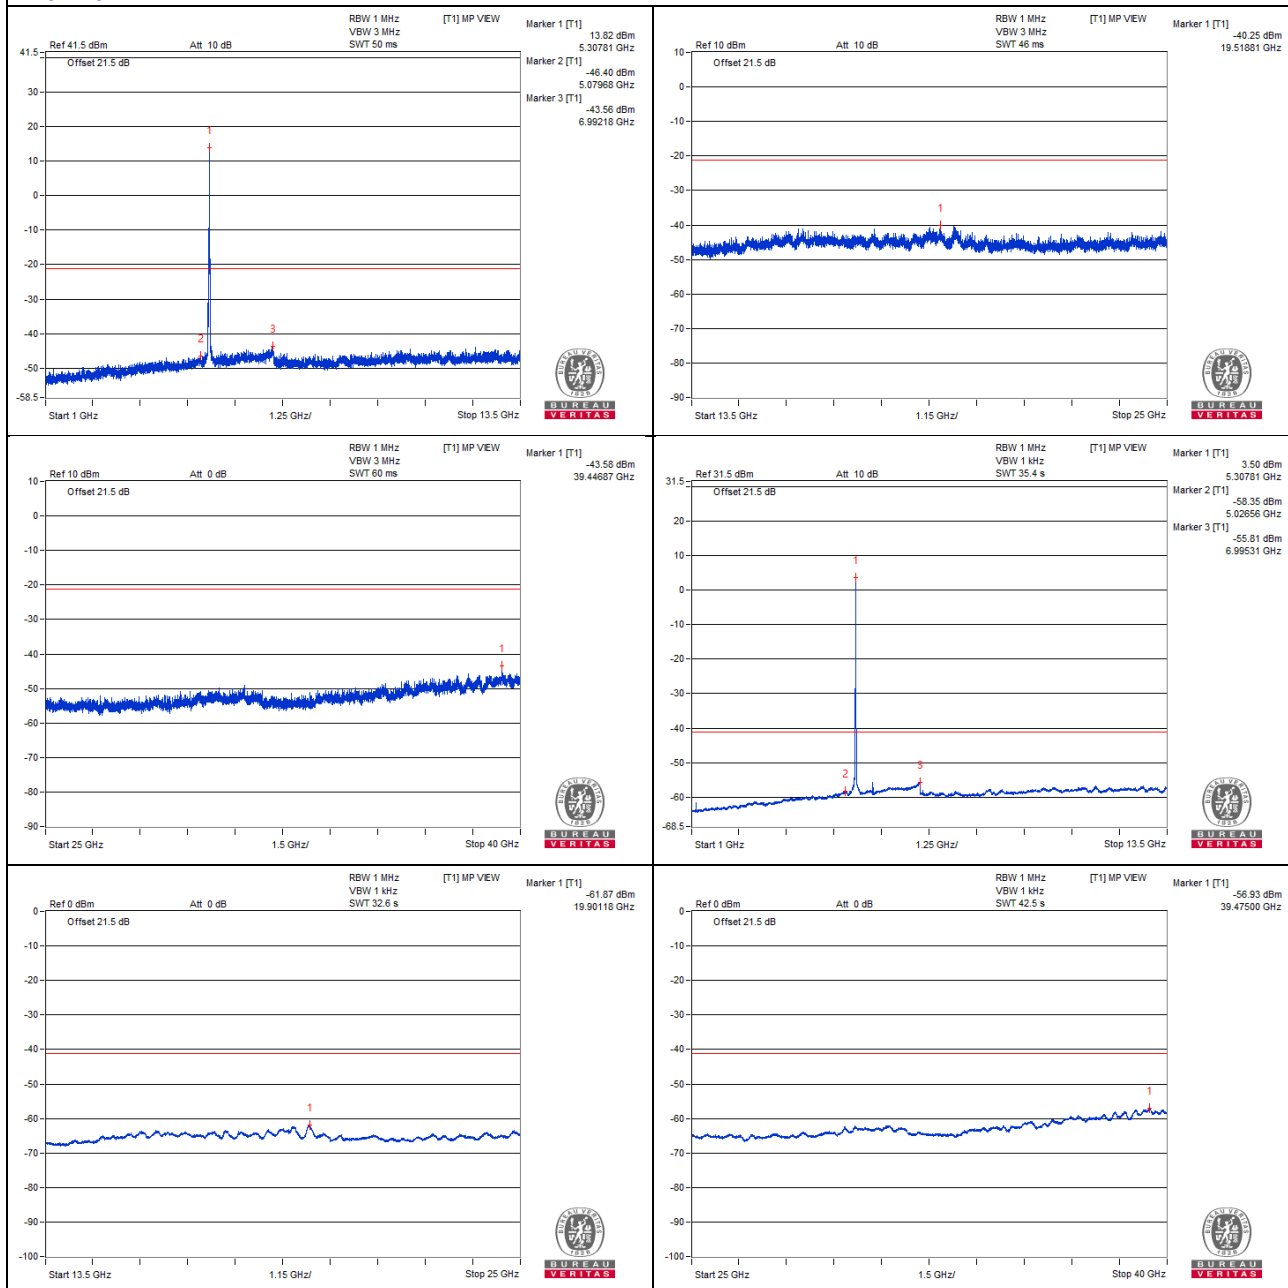

Chain 1

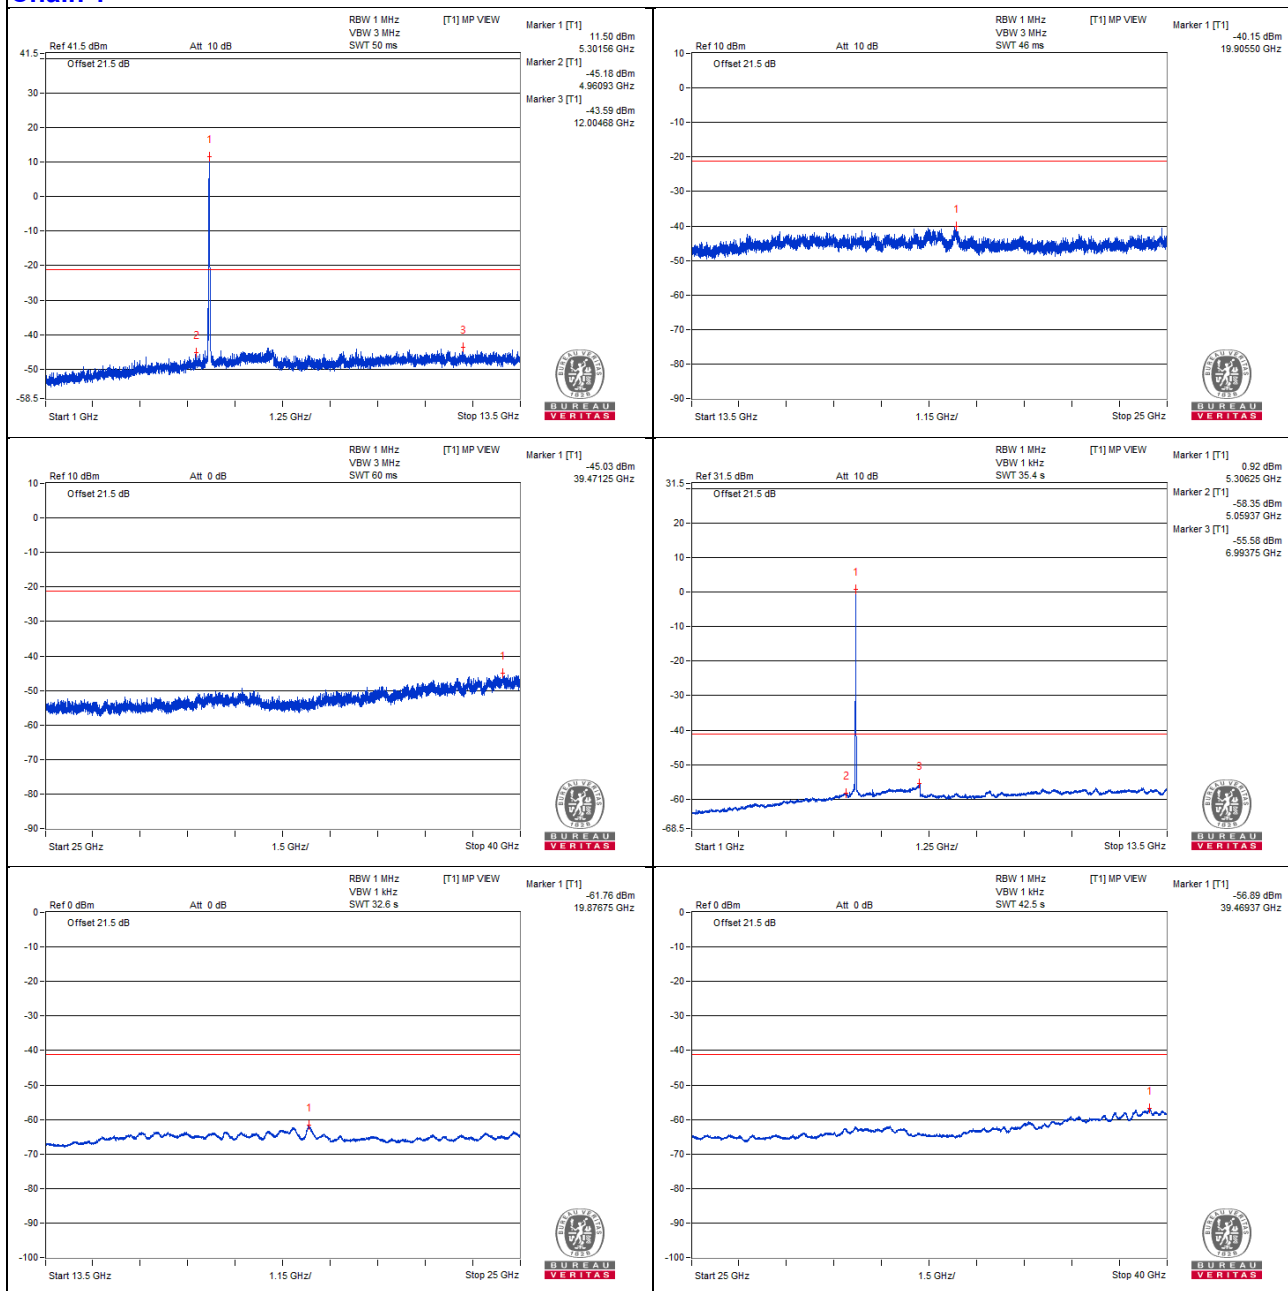

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5350.72 PK	63.77	74	-10.23	-39.07	-44.24	6.43	-31.49
2	5350.12 AV	46.83	54	-7.17	-57.44	-58.34	6.43	-48.43

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

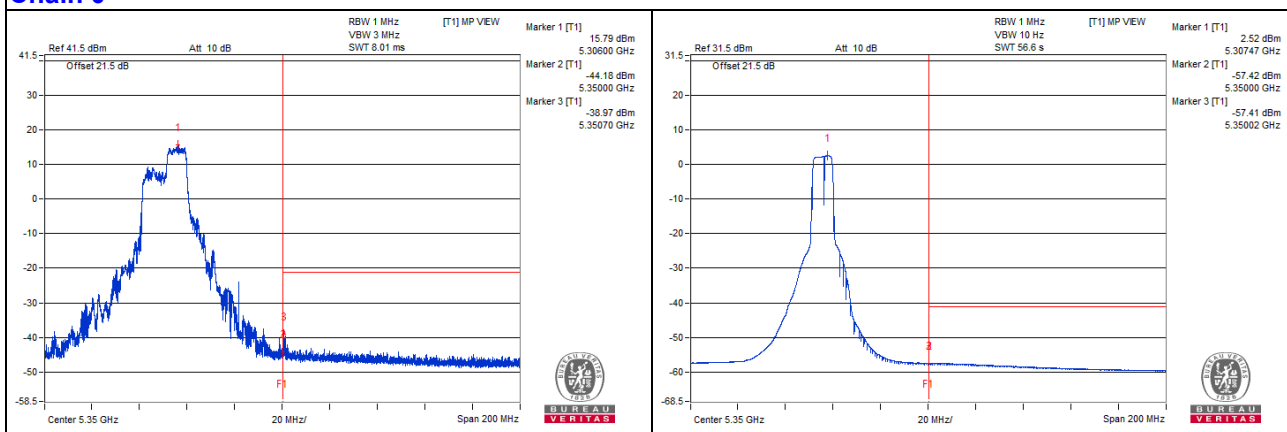

Chain 1

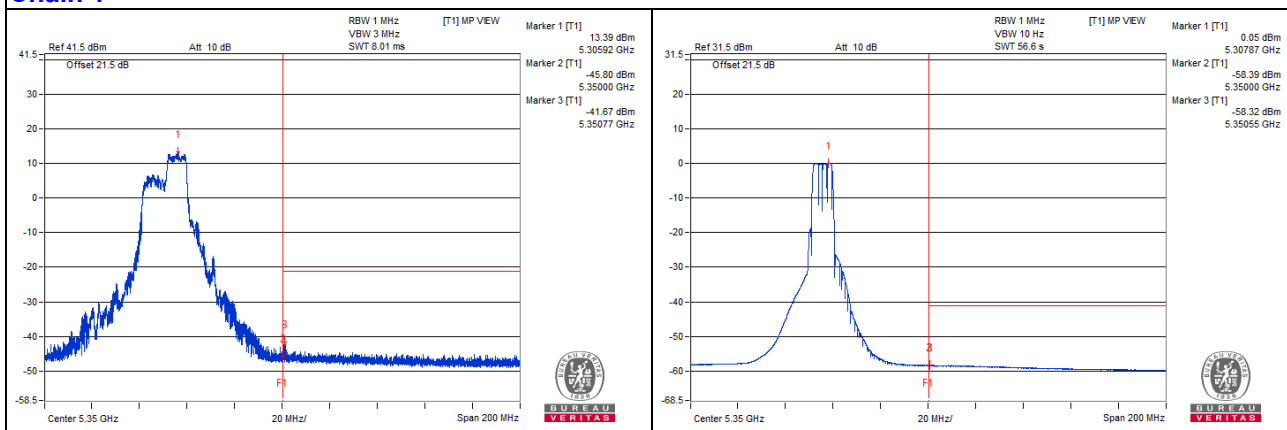

Channel 64

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	1120.31 PK	53.89	74	-20.11	-52.04	-53.13	8.17	-41.37
2	1120.31 AV	43.37	54	-10.63	-62.67	-63.51	8.17	-51.89
3	7103.12 PK	58.78	68.2	-9.42	-47.71	-47.62	8.17	-36.48
4	10632.81 PK	60.31	74	-13.69	-46.78	-45.57	8.17	-34.95
5	10634.37 AV	48.61	54	-5.39	-57.75	-57.91	8.17	-46.65
6	15953.81 PK	61.53	74	-12.47	-45.69	-44.25	8.17	-33.73
7	15961 AV	41.17	54	-12.83	-65.31	-65.23	8.17	-54.09


Note :

1. Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8


d = measurement distance in 3 meters.

2. # : Non-restricted frequency, no limit for average emission.

Chain 0

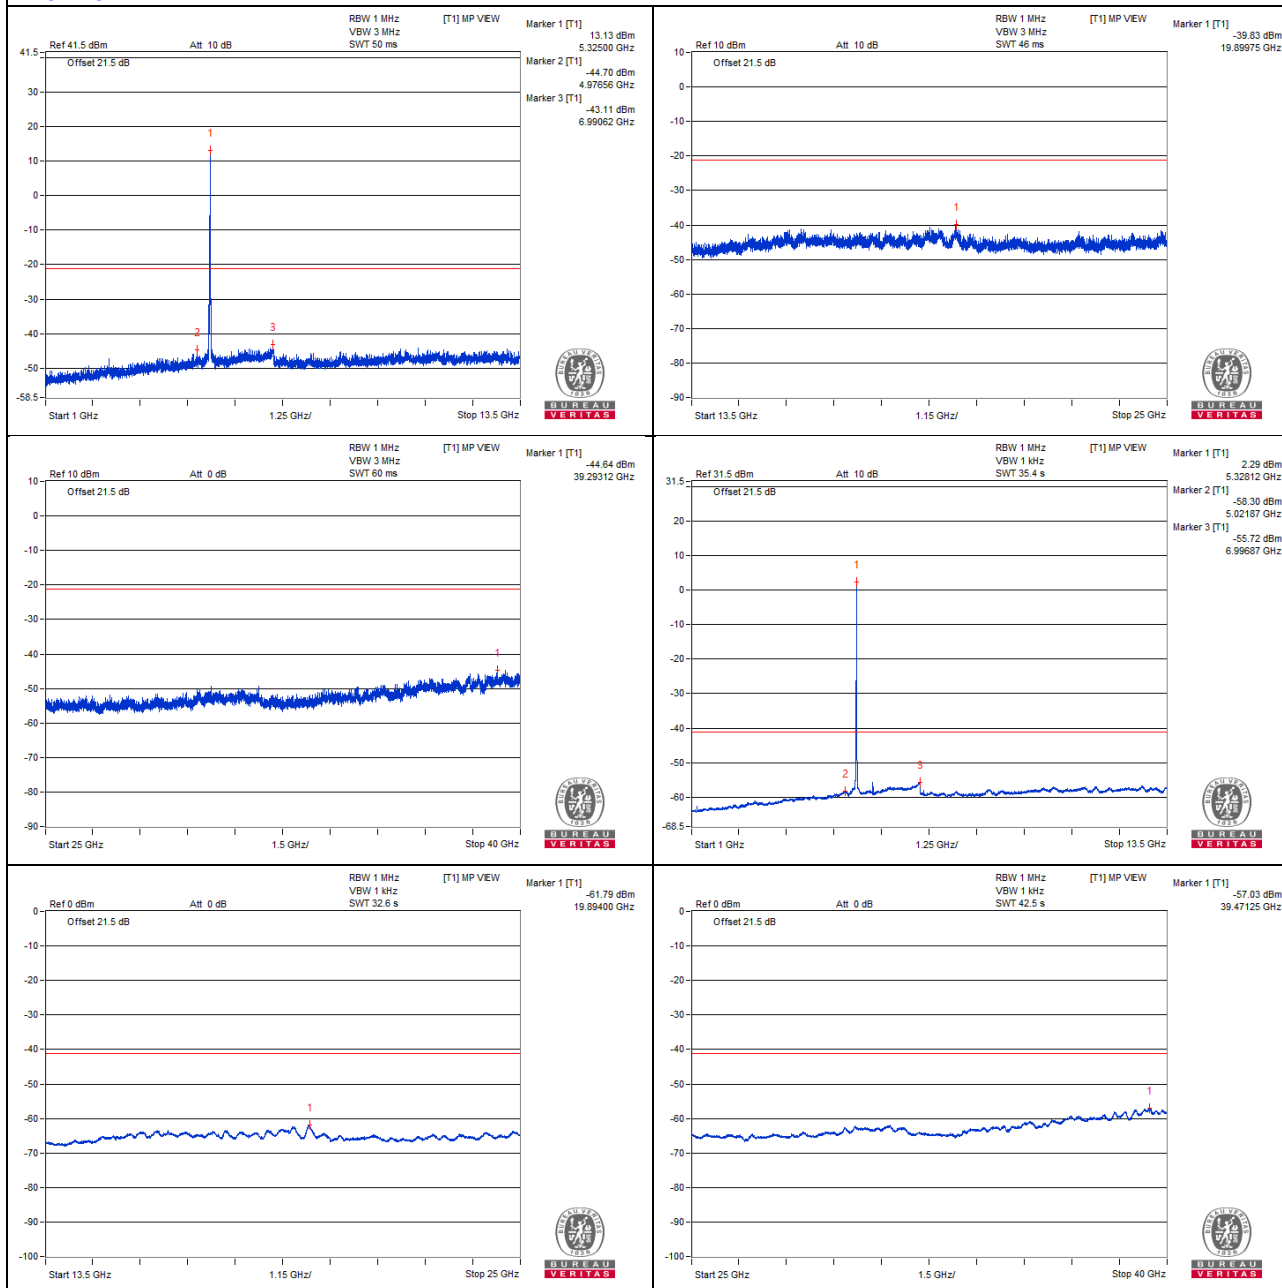

Chain 1

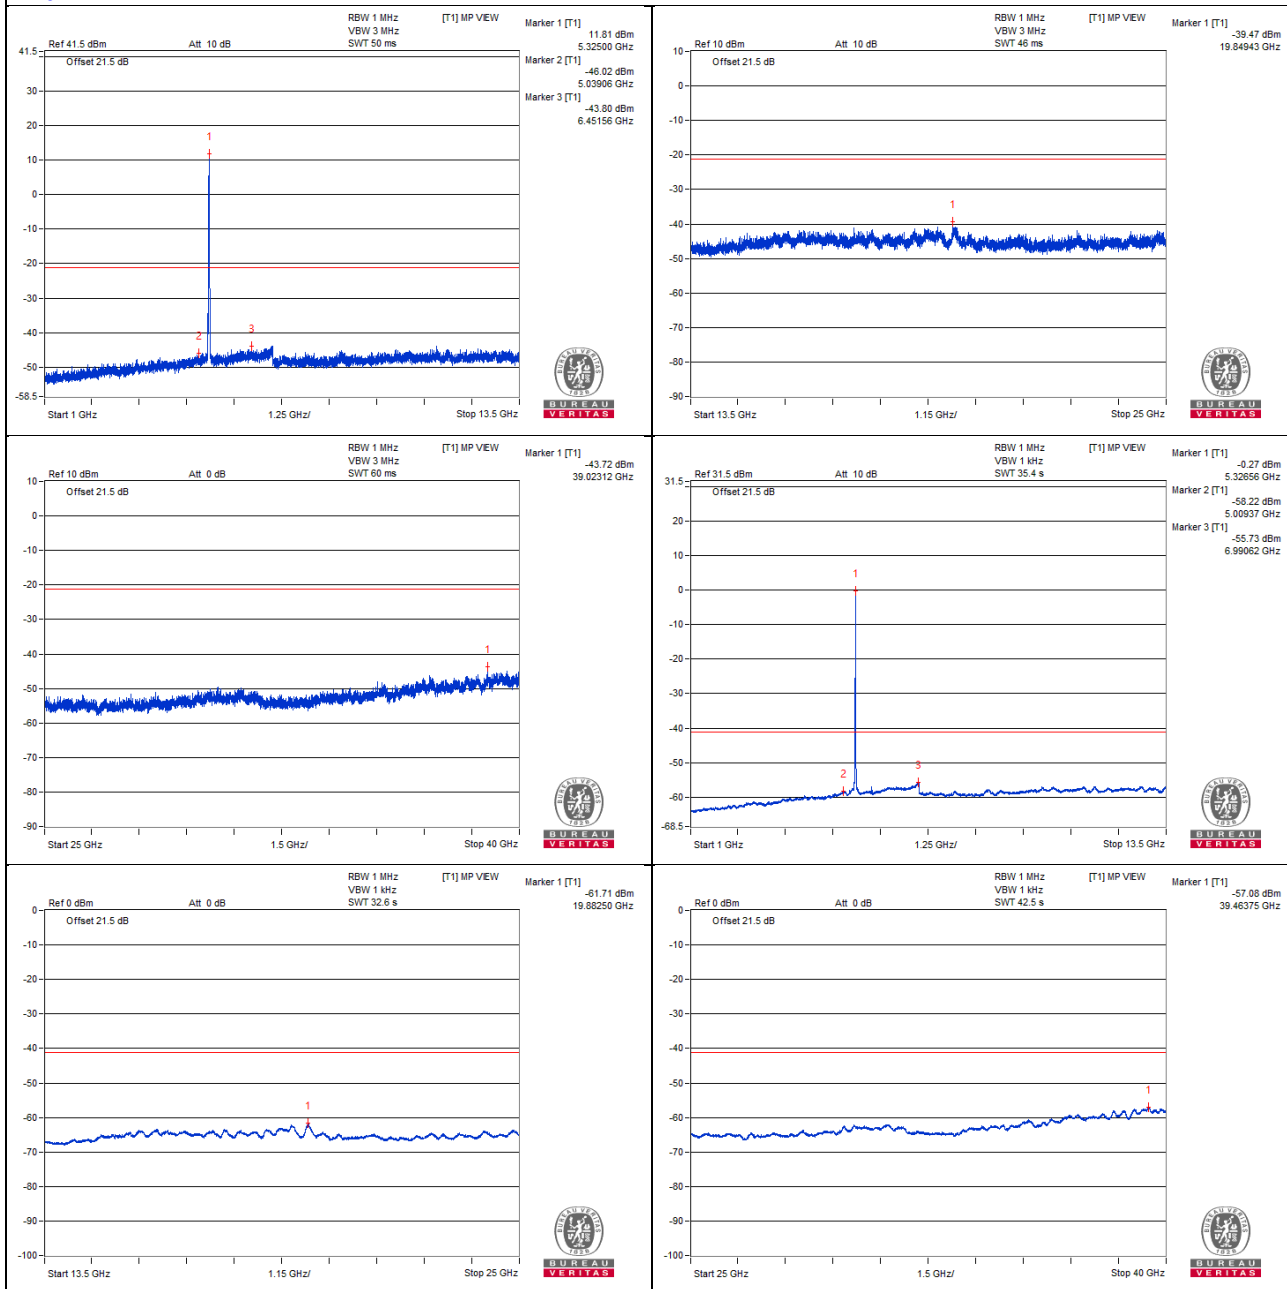

Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5350 PK	74.59	74	*0.59	-29.48	-30.85	6.43	-20.67
2	5350 AV	49.13	54	-4.87	-55.72	-55.43	6.43	-46.13


Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8


d = measurement distance in 3 meters.

* The unwanted emission was verified and the test result was passed by radiated measurement.
(Please refer APPENDIX B)

Chain 0

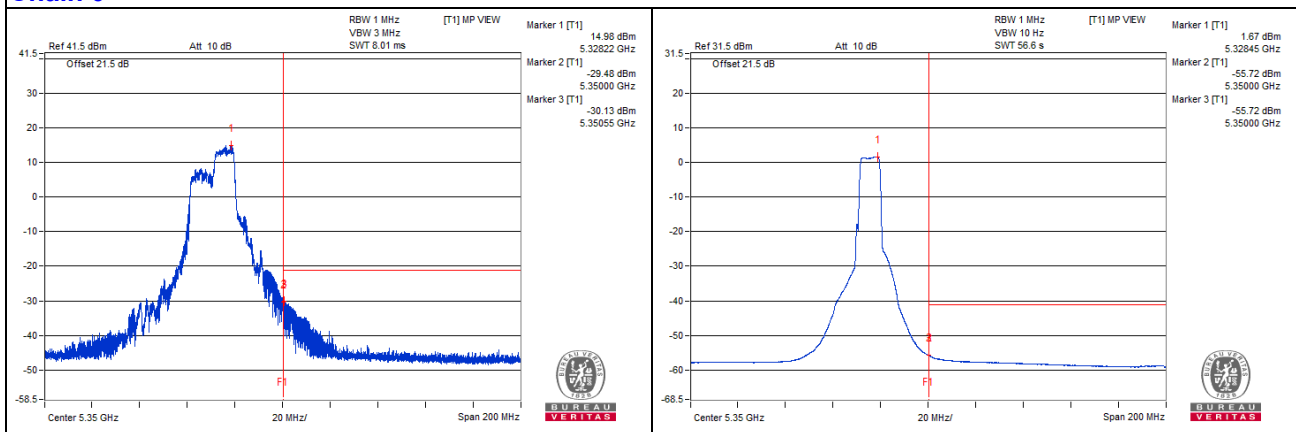

Chain 1

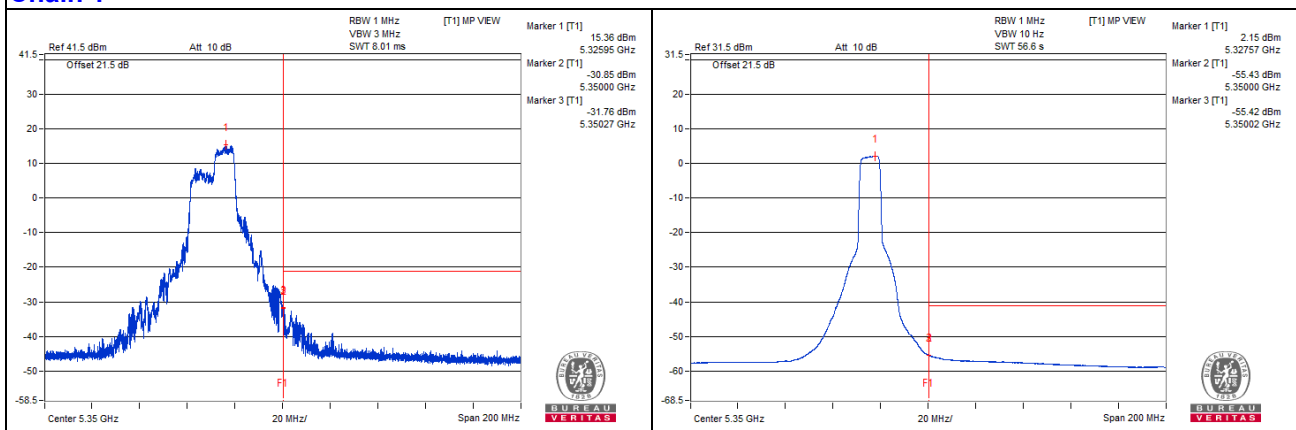

Channel 100

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	1285.93 PK	54.04	68.2	-14.16	-53.31	-51.65	8.17	-41.22
2	1300 AV	42.84	54	-11.16	-63.59	-63.61	8.17	-52.42
3	7323.43 PK	58.82	74	-15.18	-48.15	-47.15	8.17	-36.44
4	7328.12 AV	47.71	54	-6.29	-58.82	-58.65	8.17	-47.55
5	11003.12 PK	60.19	74	-13.81	-45.7	-46.88	8.17	-35.07
6	10995.31 AV	48.53	54	-5.47	-57.83	-57.99	8.17	-46.73
7	16502.93 PK	63.25	68.2	-4.95	-42.48	-44.03	8.17	-32.01


Note :

1. Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8


d = measurement distance in 3 meters.

2. # : Non-restricted frequency, no limit for average emission.

Chain 0

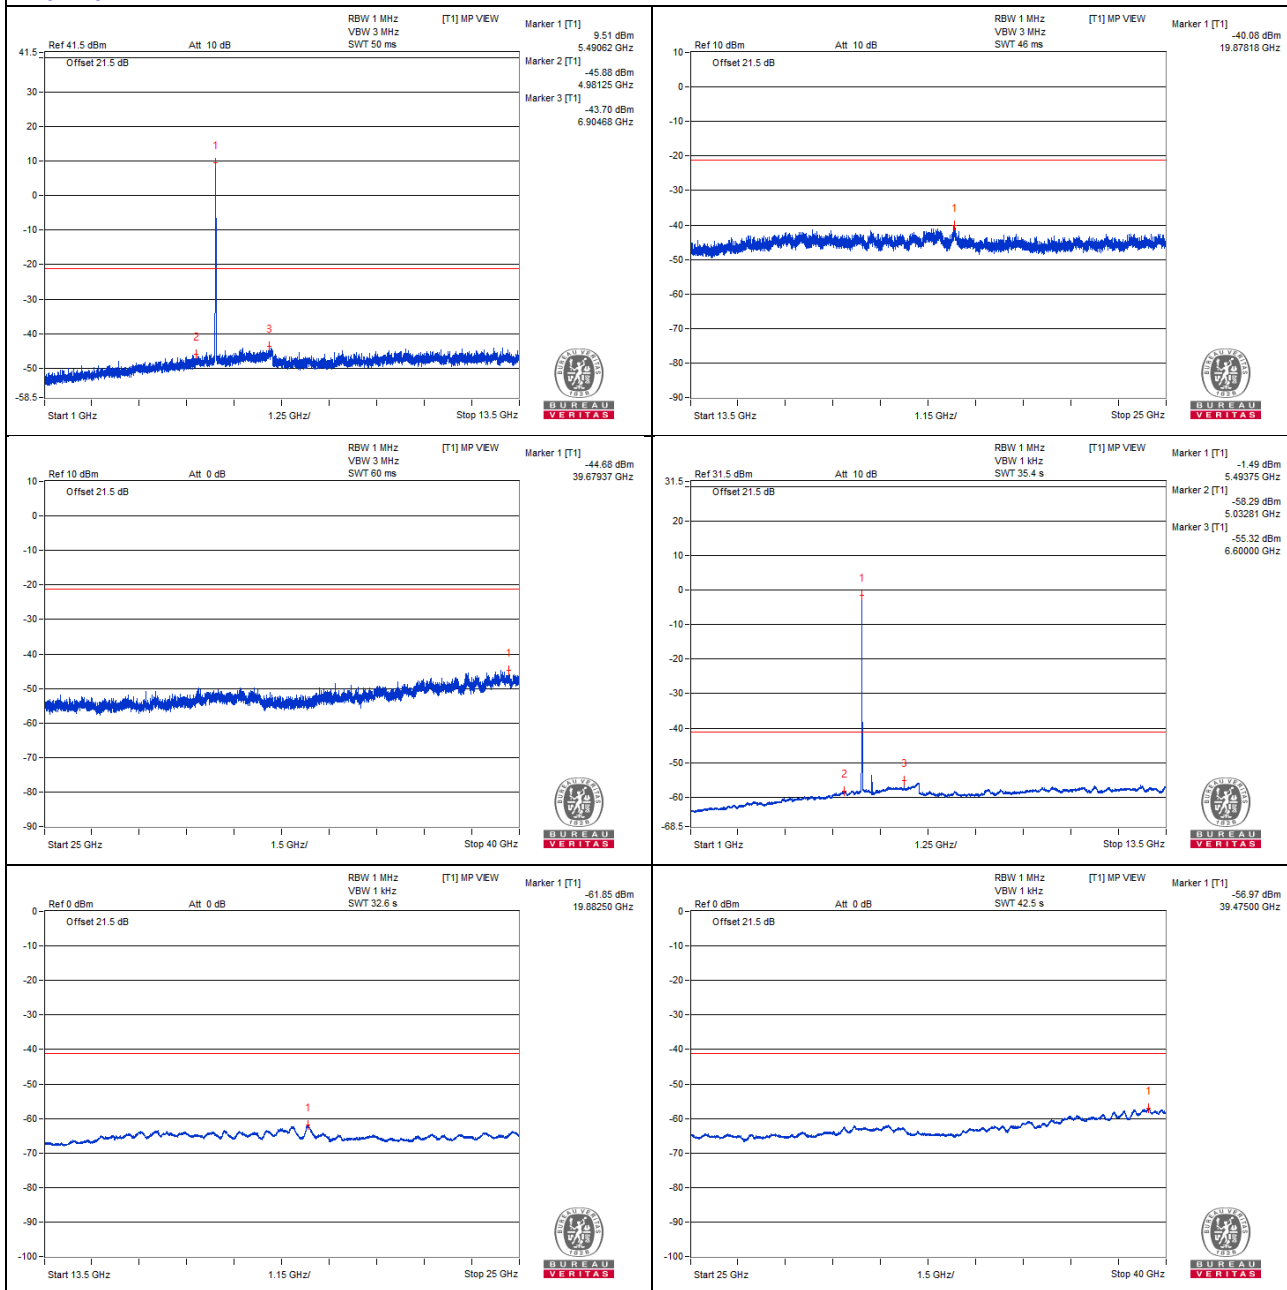

Chain 1

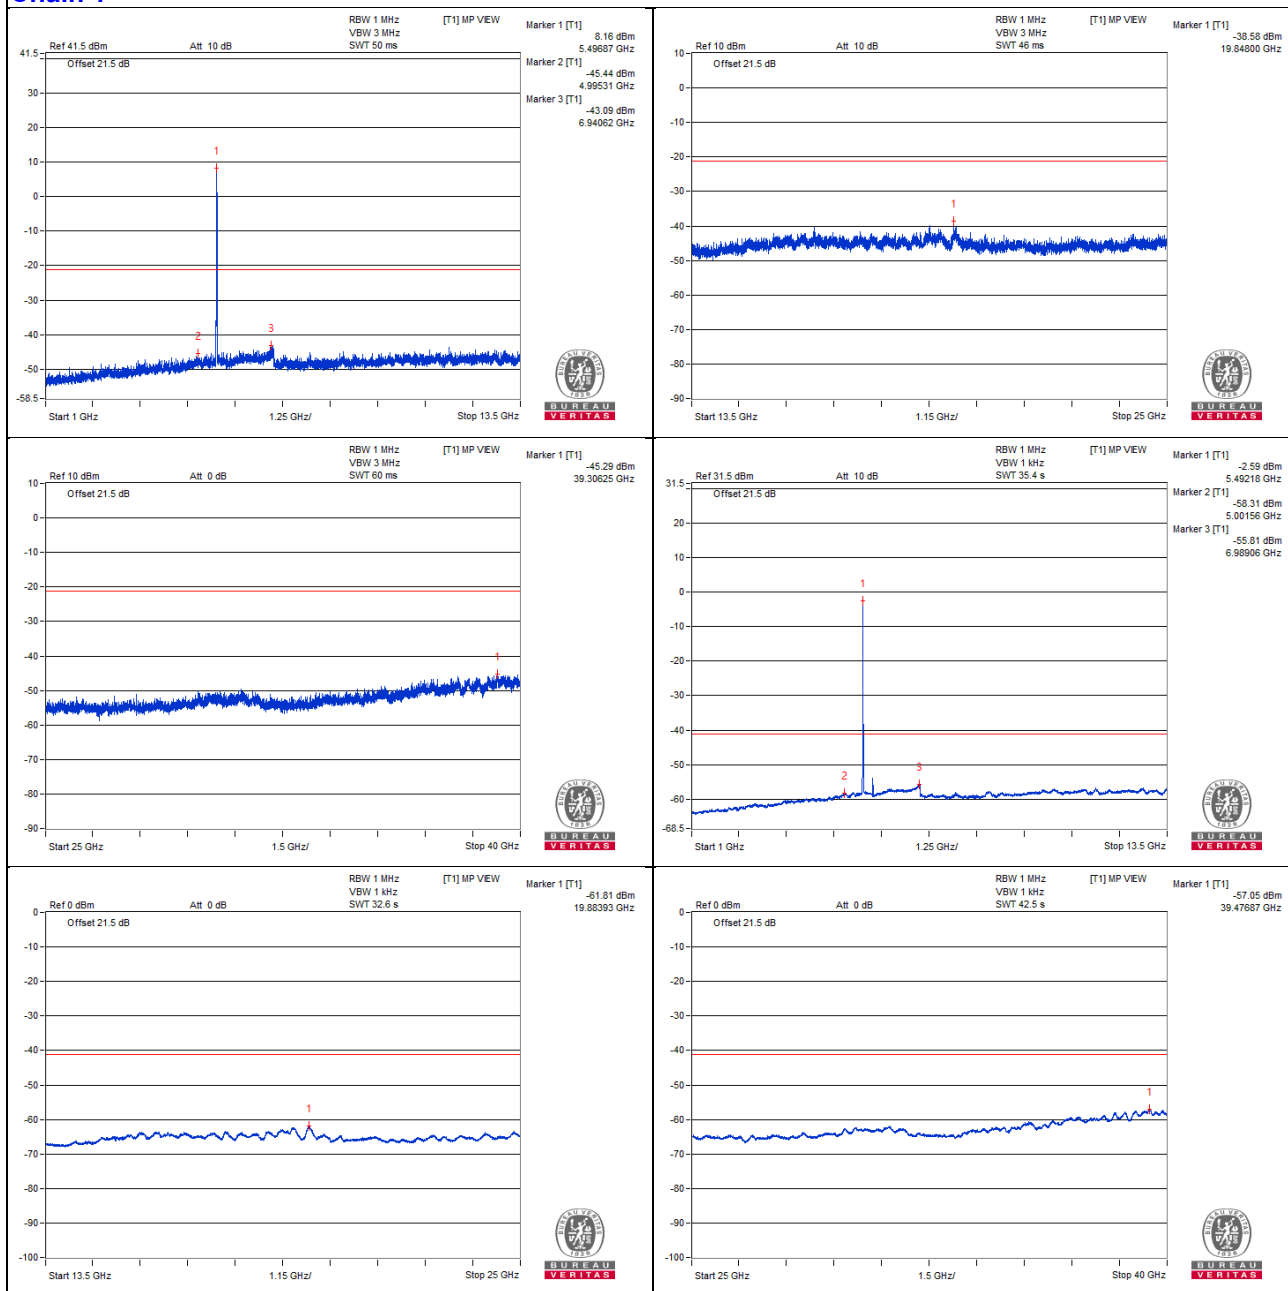

Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5423.31 PK	61.34	74	-12.66	-44.15	-45.44	7.82	-33.92
2	5460 AV	47.78	54	-6.22	-58.48	-58.15	7.82	-47.48
3	5469.56 PK	70.21	68.2	*2.01	-37.79	-34.56	7.82	-25.05

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.


* The unwanted emission was verified and the test result was passed by radiated measurement.

(Please refer APPENDIX B)

Chain 0

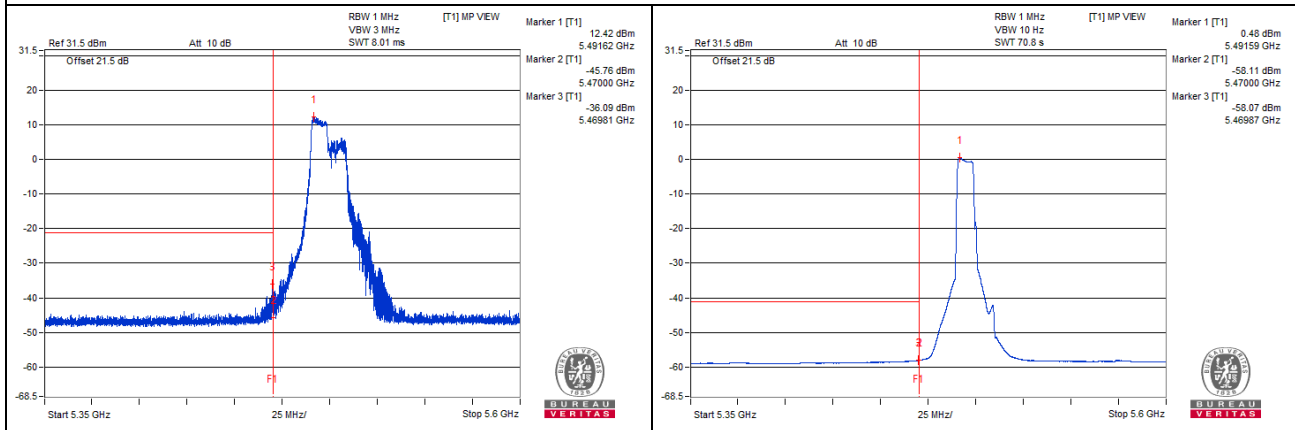

Chain 1

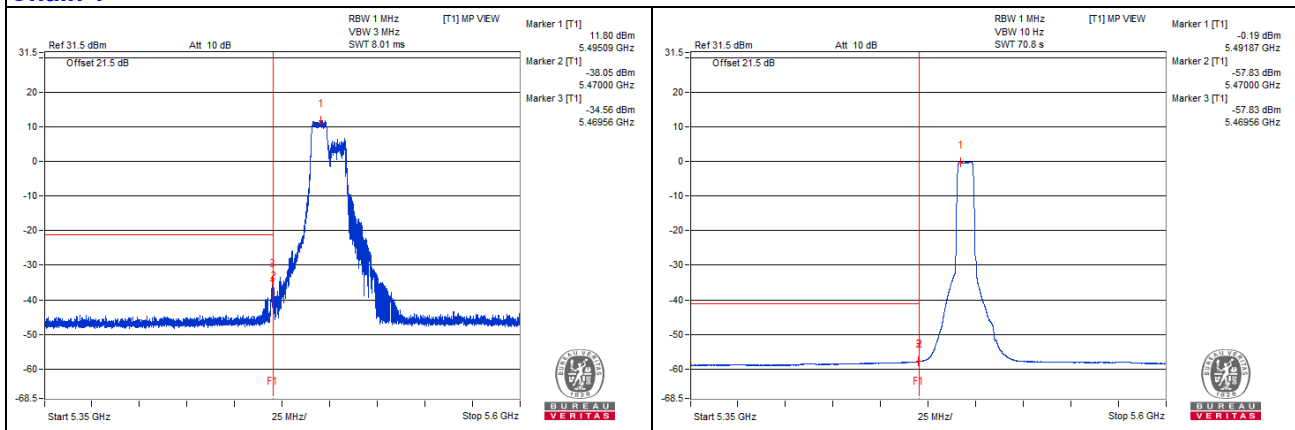

Channel 116

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	1373.43 PK	54.06	74	-19.94	-53.88	-51.26	8.17	-41.2
2	1368.75 AV	43.18	54	-10.82	-63.13	-63.4	8.17	-52.08
3	7434.37 PK	58.53	74	-15.47	-48.62	-47.3	8.17	-36.73
4	7434.37 AV	47.24	54	-6.76	-59.22	-59.19	8.17	-48.02
5	11154.68 PK	60.53	74	-13.47	-45.02	-47.04	8.17	-34.73
6	11167.18 AV	48.7	54	-5.3	-57.65	-57.84	8.17	-46.56
7	16741.56 PK	63.18	68.2	-5.02	-44.17	-42.51	8.17	-32.08


Note :

1. Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8


d = measurement distance in 3 meters.

2. # : Non-restricted frequency, no limit for average emission.

Chain 0

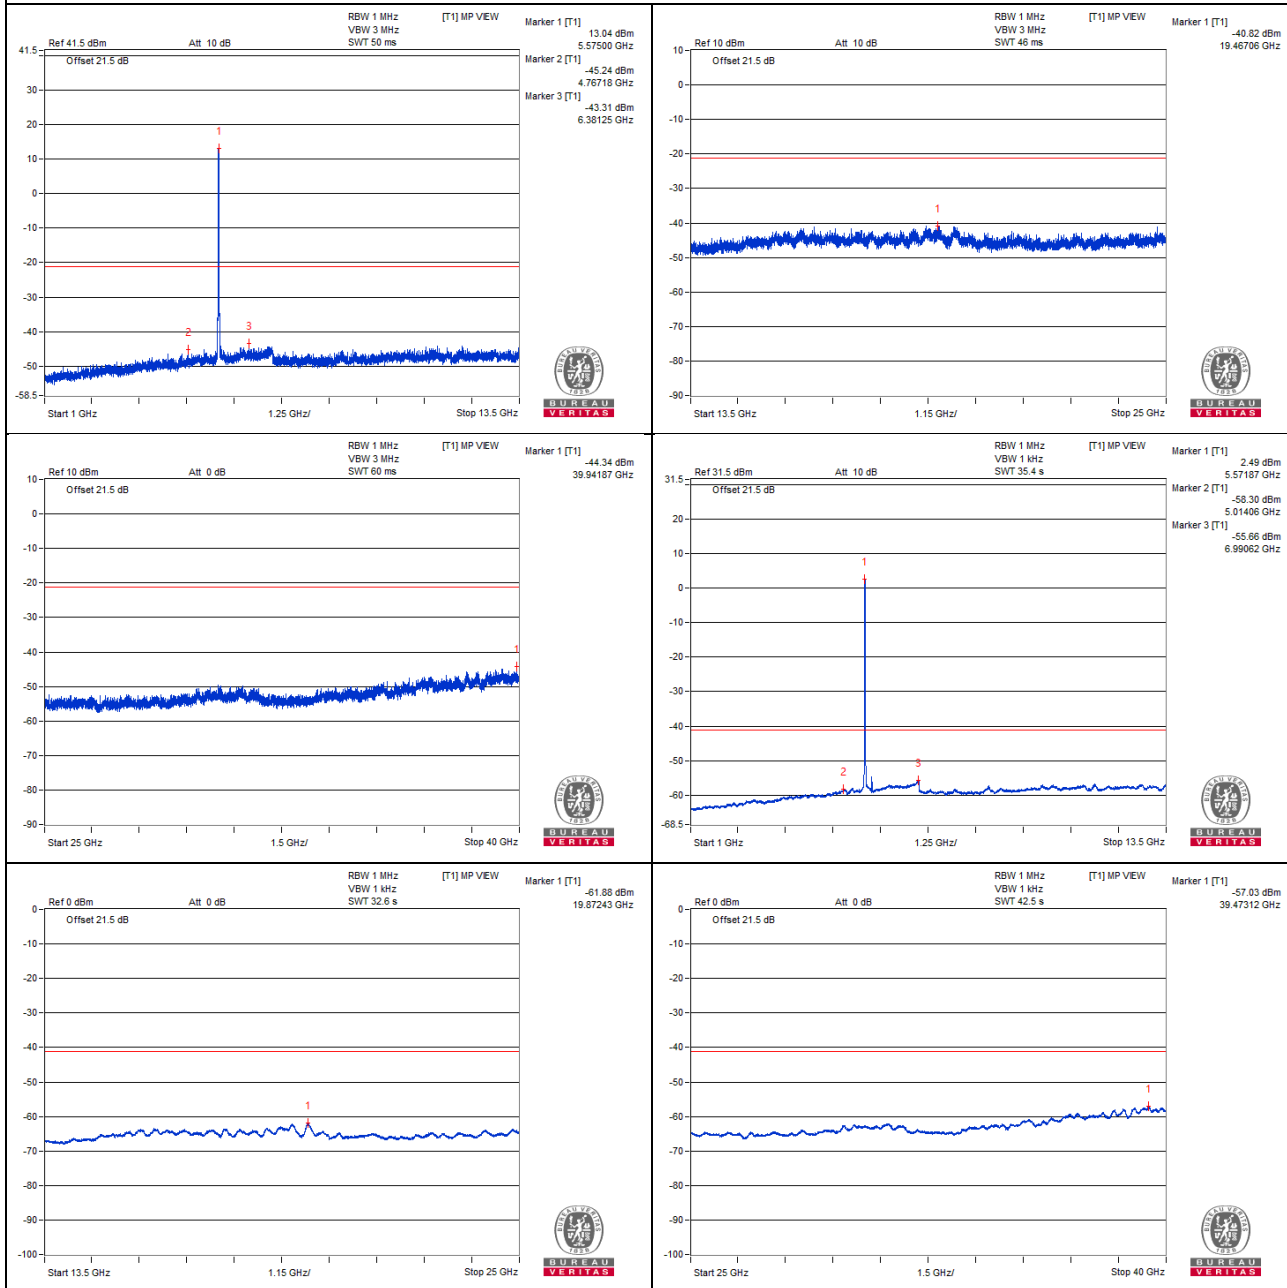

Chain 1

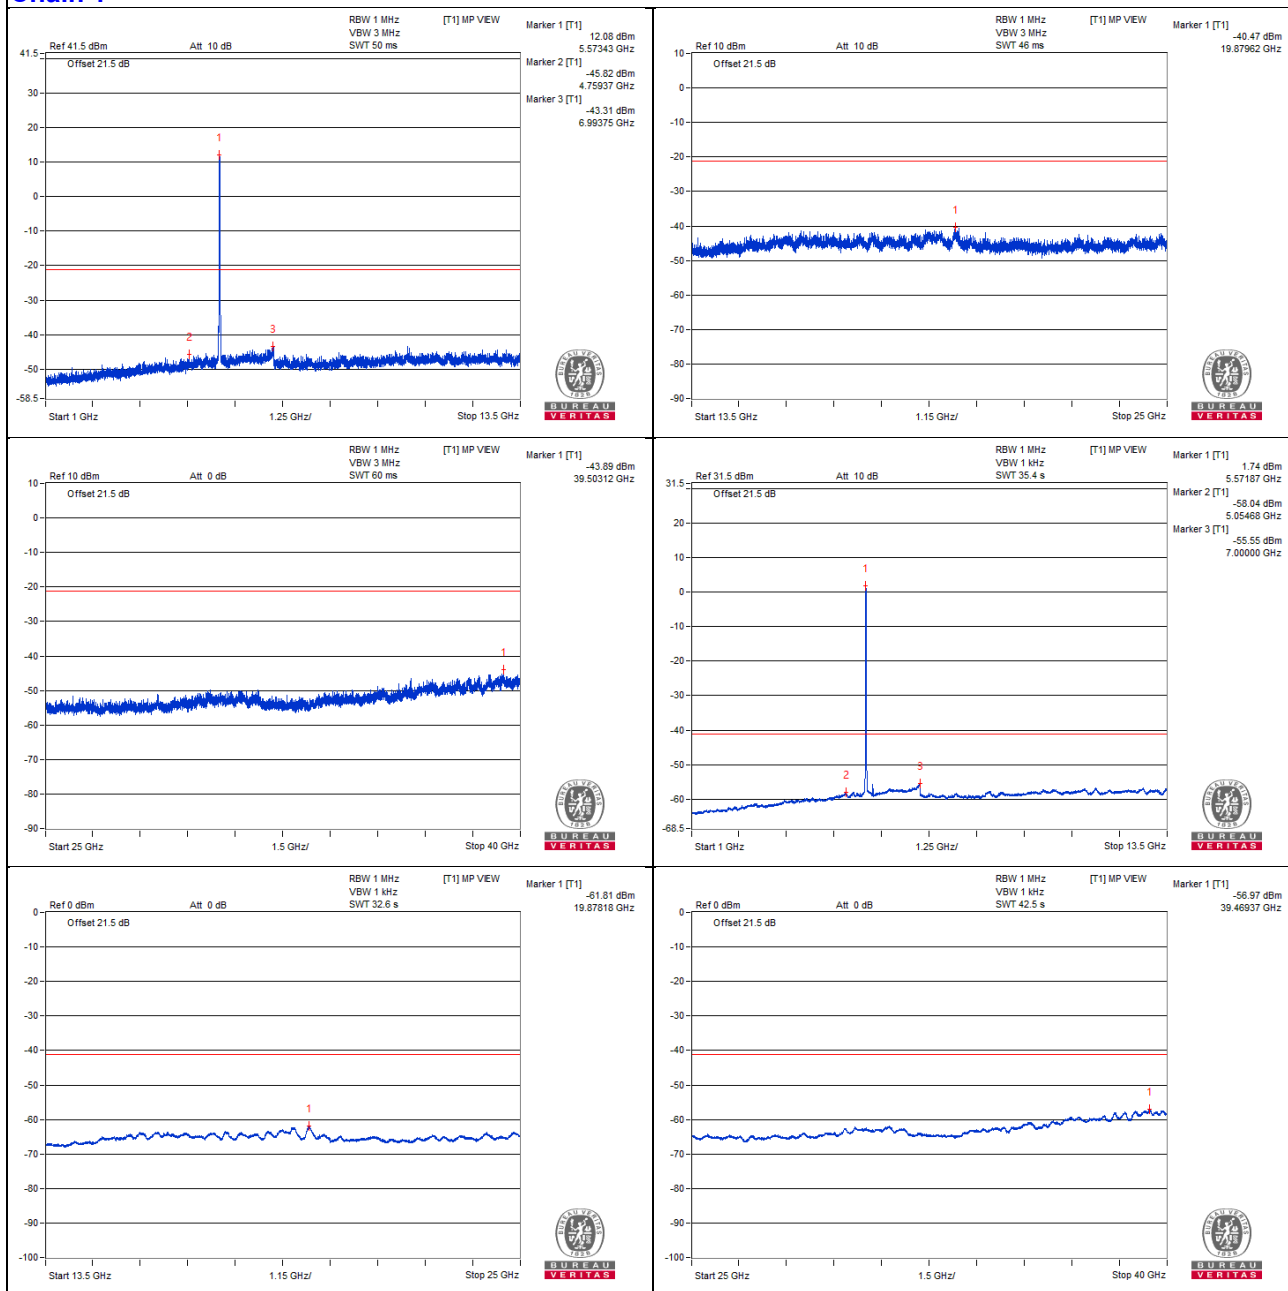

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5422.4 PK	60.85	74	-13.15	-43.87	-47.26	7.82	-34.41
2	5418.34 AV	47.03	54	-6.97	-59.26	-58.87	7.82	-48.23
3	5465.28 PK	60.23	68.2	-7.97	-45.64	-46.09	7.82	-35.03

Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

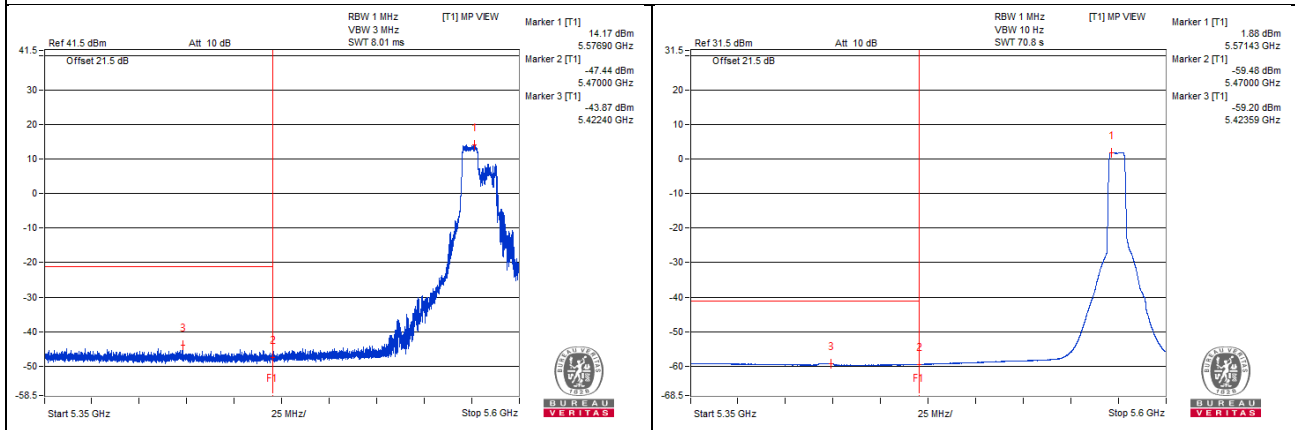

Chain 1

