

802.11ax (HE80) - Channel 151

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	2501.56 PK	55.97	74	-18.03	-51.27	-49.8	8.17	-39.29
2	2496.87 AV	42.12	54	-11.88	-64.63	-64.03	8.17	-53.14
3	5481.25 PK	59.77	88.2	-28.43	-46.92	-46.43	8.17	-35.49
4	5487.5 AV	38.45	68.2	-29.75	-67.77	-68.22	8.17	-56.81
5	5759.37 PK	59.78	88.2	-28.42	-47.28	-46.11	8.17	-35.48
6	5759.37 AV	51.21	68.2	-16.99	-54.9	-55.58	8.17	-44.05
7	4465.62 PK	57.99	88.2	-30.21	-48.55	-48.36	8.17	-37.27
8	4470.31 AV	36.98	68.2	-31.22	-69.45	-69.47	8.17	-58.28
9	13406.25 PK	60.26	88.2	-27.94	-46.77	-45.67	8.17	-35
10	13410.93 AV	39.62	68.2	-28.58	-67.76	-66.05	8.17	-55.64
11	20115.37 PK	52.61	74	-21.39	-54.64	-53.14	8.17	-42.65
12	20118.25 AV	41.5	54	-12.5	-64.93	-64.96	8.17	-53.76

Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 1

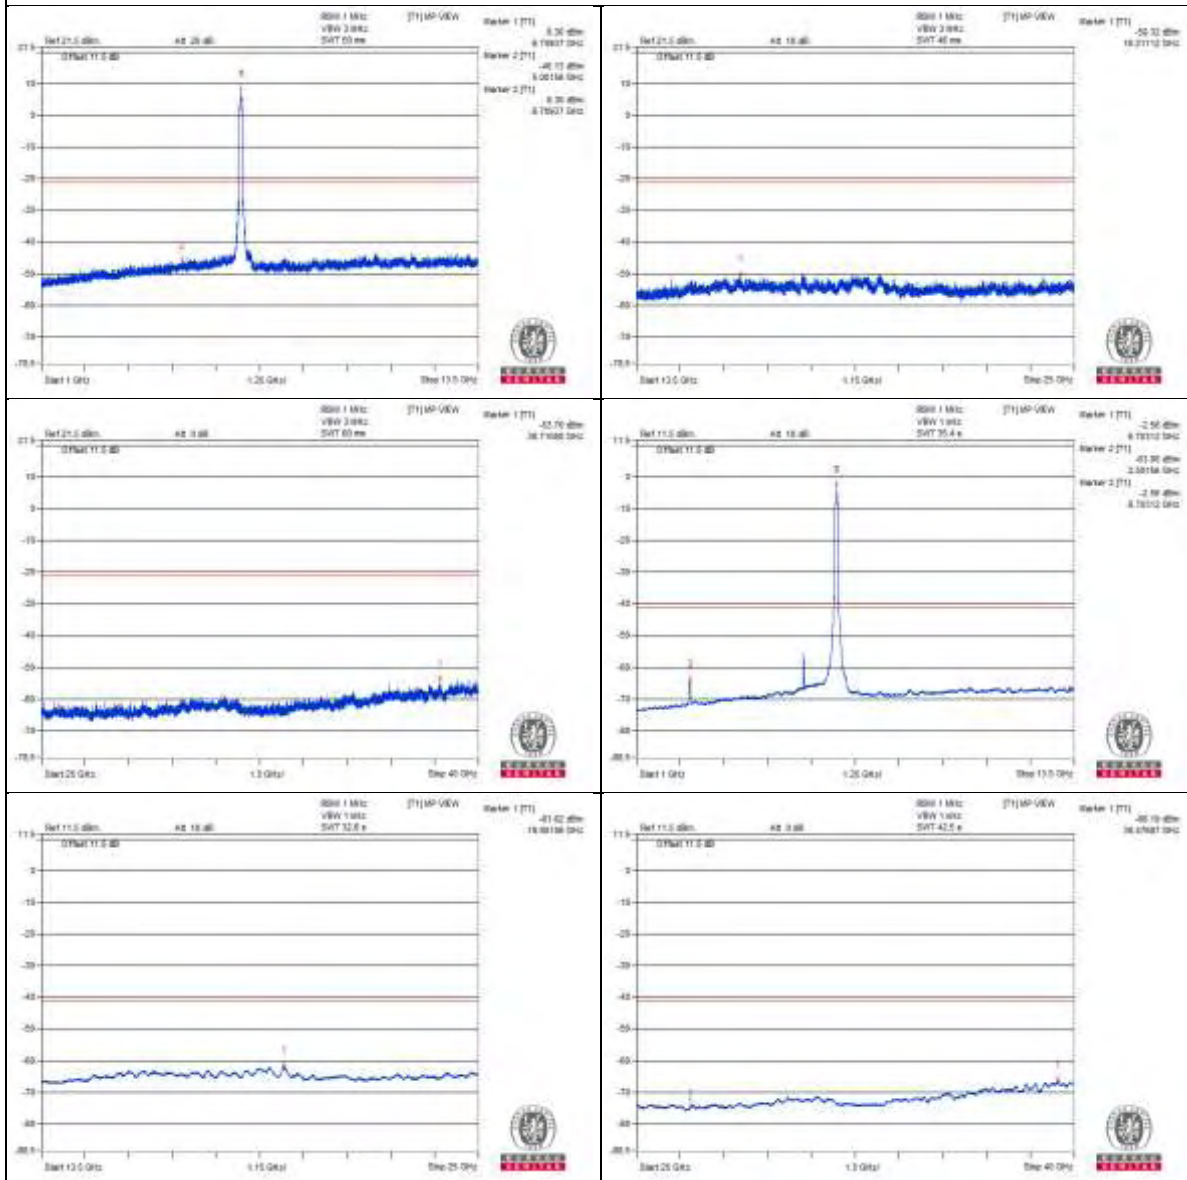

802.11ax (HE80) - Channel 167

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	2578.12 PK	56.61	74	-17.39	-50.42	-49.32	8.17	-38.65
2	2576.56 AV	39.93	54	-14.07	-66.95	-66.11	8.17	-55.33
3	5481.25 PK	59.75	88.2	-28.45	-46.69	-46.69	8.17	-35.51
4	5487.5 AV	38.46	68.2	-29.74	-68.17	-67.79	8.17	-56.8
5	5759.37 PK	61.01	88.2	-27.19	-44.79	-46.19	8.17	-34.25
6	5759.37 AV	51.71	68.2	-16.49	-54.28	-55.23	8.17	-43.55
7	4520.31 PK	57.67	74	-16.33	-48.69	-48.86	8.17	-37.59
8	4523.43 AV	36.96	54	-17.04	-69.46	-69.5	8.17	-58.3
9	13570.43 PK	51.58	88.2	-36.62	-55.74	-54.13	8.17	-43.68
10	13569 AV	40.98	68.2	-27.22	-66.5	-64.62	8.17	-54.28
11	20359.75 PK	52.03	74	-21.97	-53.84	-55.06	8.17	-43.23
12	20354 AV	41.52	54	-12.48	-64.82	-65.03	8.17	-53.74

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

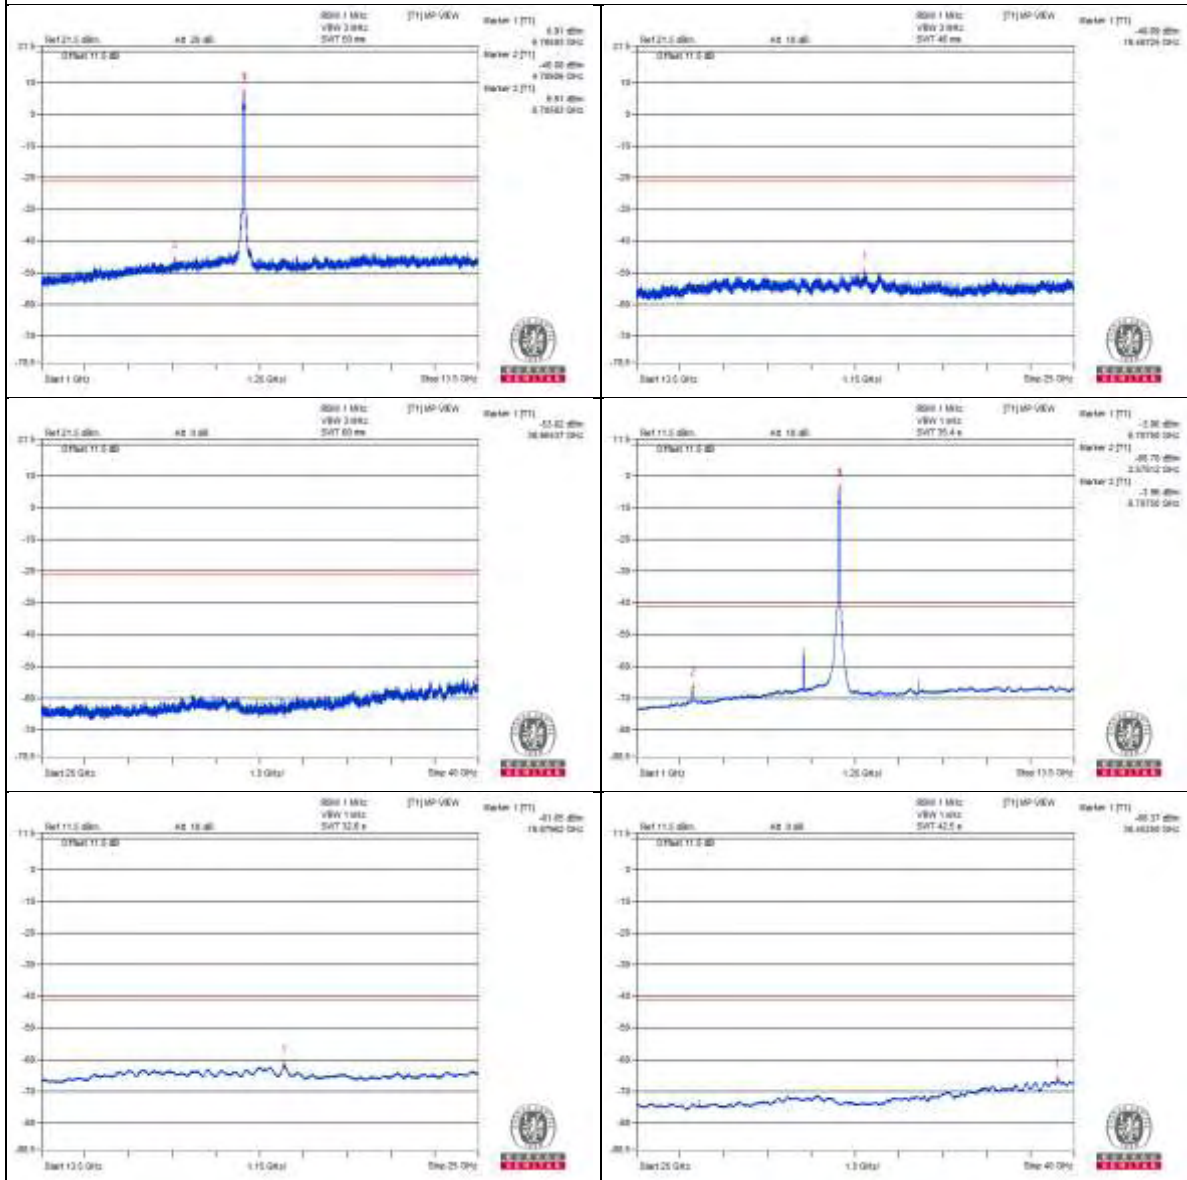

Chain 1

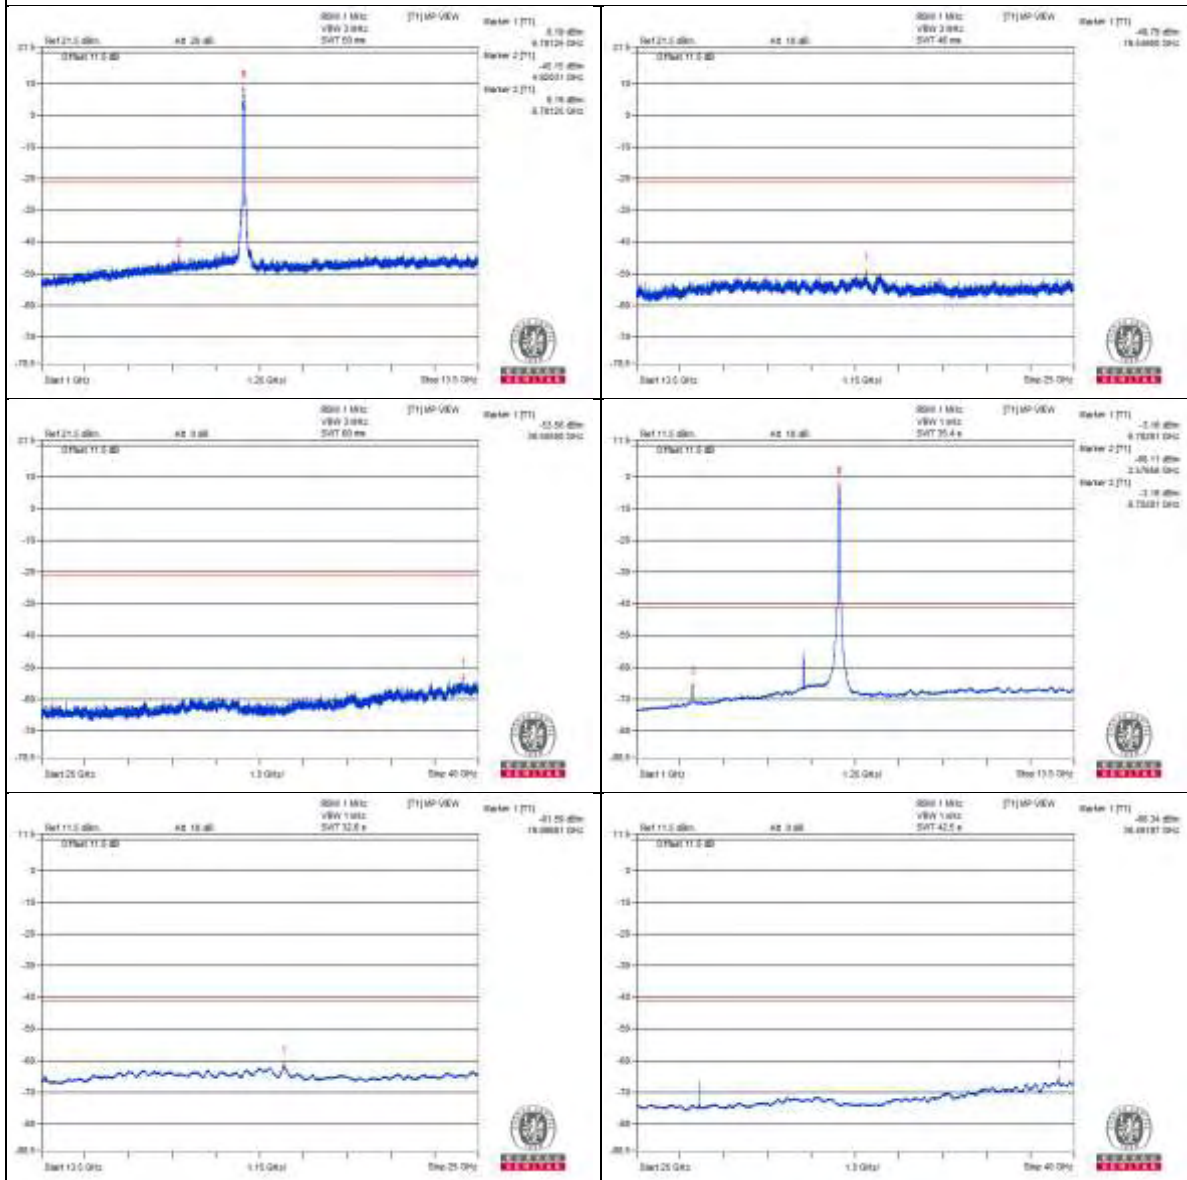

Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	7196.25 PK	59.76	88.2	-28.44	-45.62	-48.09	8.17	-35.5
2	7209.25 AV	47.05	68.2	-21.15	-59.42	-59.37	8.17	-48.21


Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8


d = measurement distance in 3 meters.

* The unwanted emission was verified and the test result was passed by radiated measurement.

Chain 0

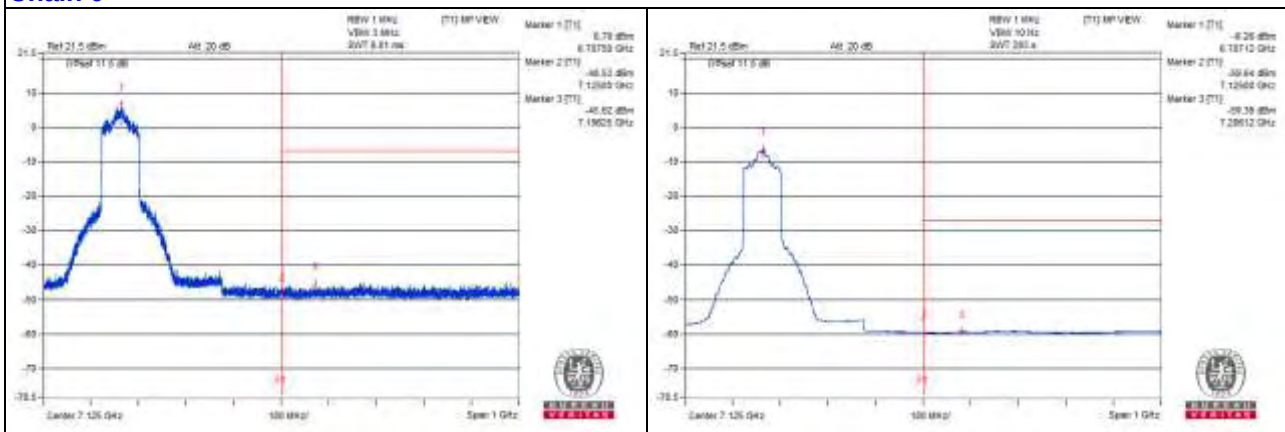

Chain 1

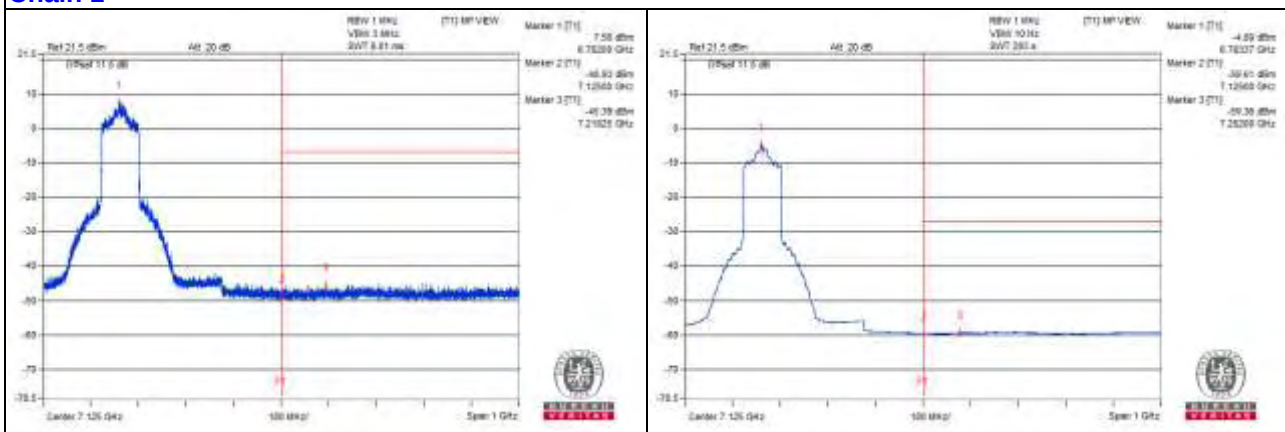

802.11ax (HE160) - Channel 15

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	1825 PK	54.78	74	-19.22	-52.27	-51.12	8.17	-40.48
2	1815.62 AV	38.34	54	-15.66	-67.74	-68.5	8.17	-56.92
3	5485.93 PK	59.21	88.2	-28.99	-47.59	-46.9	8.17	-36.05
4	5485.93 AV	39.85	68.2	-28.35	-67.22	-66.04	8.17	-55.41
5	5756.25 PK	65.41	88.2	-22.79	-42.82	-39.76	8.17	-29.85
6	5759.37 AV	55.84	68.2	-12.36	-53.56	-48.86	8.17	-39.42
7	4020.31 PK	58.28	74	-15.72	-48.52	-47.83	8.17	-36.98
8	4015.62 AV	37.13	54	-16.87	-69.11	-69.53	8.17	-58.13
9	12050 PK	60.15	74	-13.85	-46.41	-46.18	8.17	-35.11
10	12050 AV	40.82	54	-13.18	-64.9	-66.49	8.17	-54.44
11	18074.12 PK	52.75	74	-21.25	-55.05	-52.66	8.17	-42.51
12	18078.43 AV	41.43	54	-12.57	-65.09	-64.94	8.17	-53.83

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

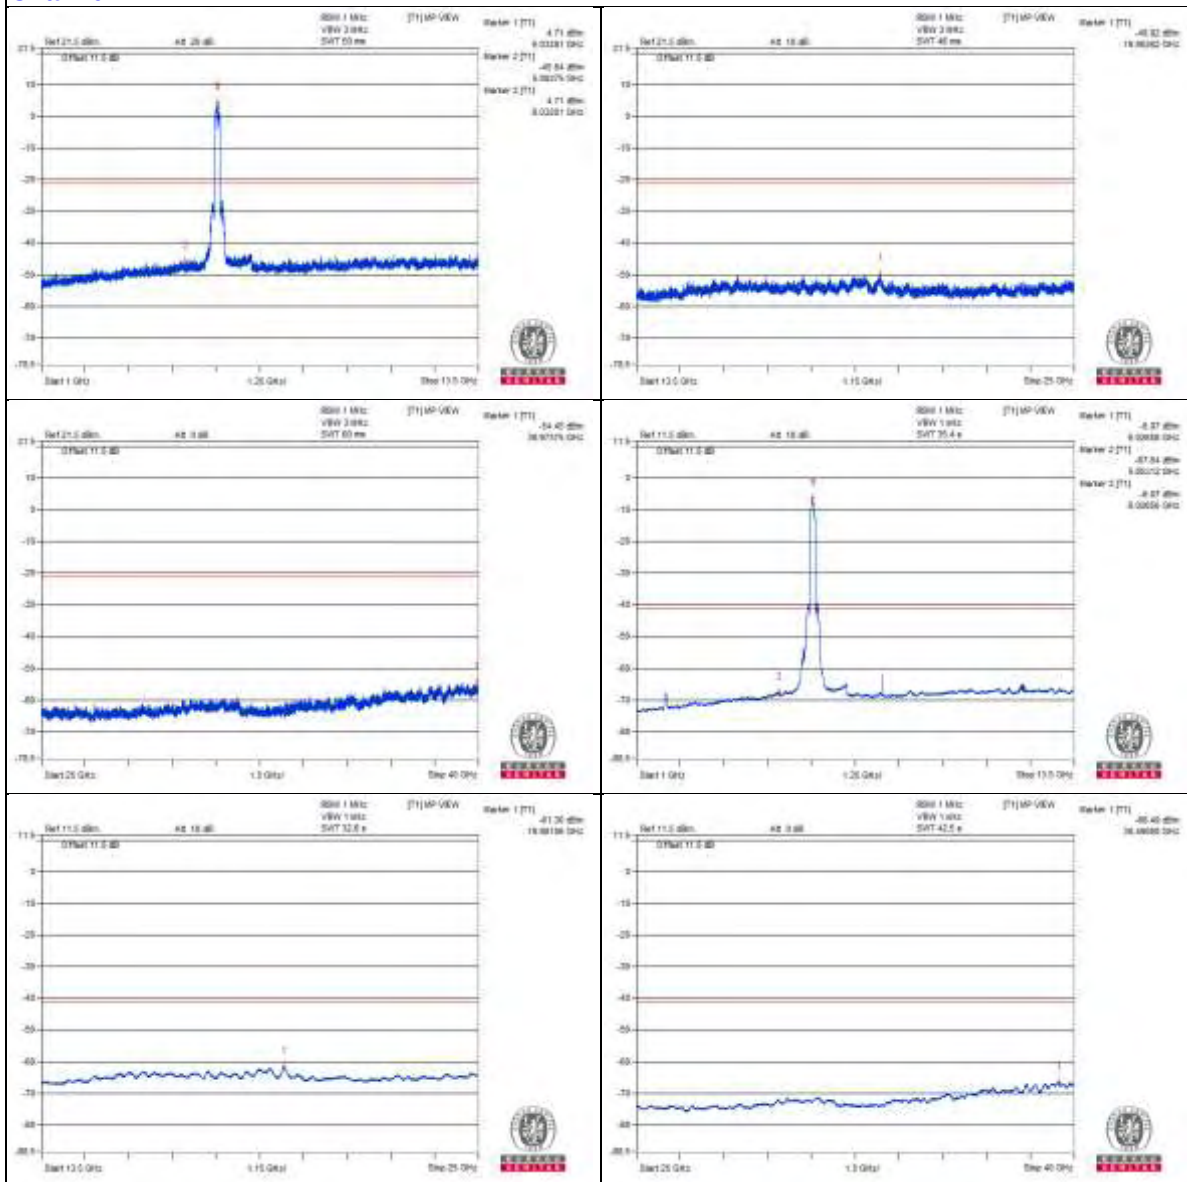

Chain 1

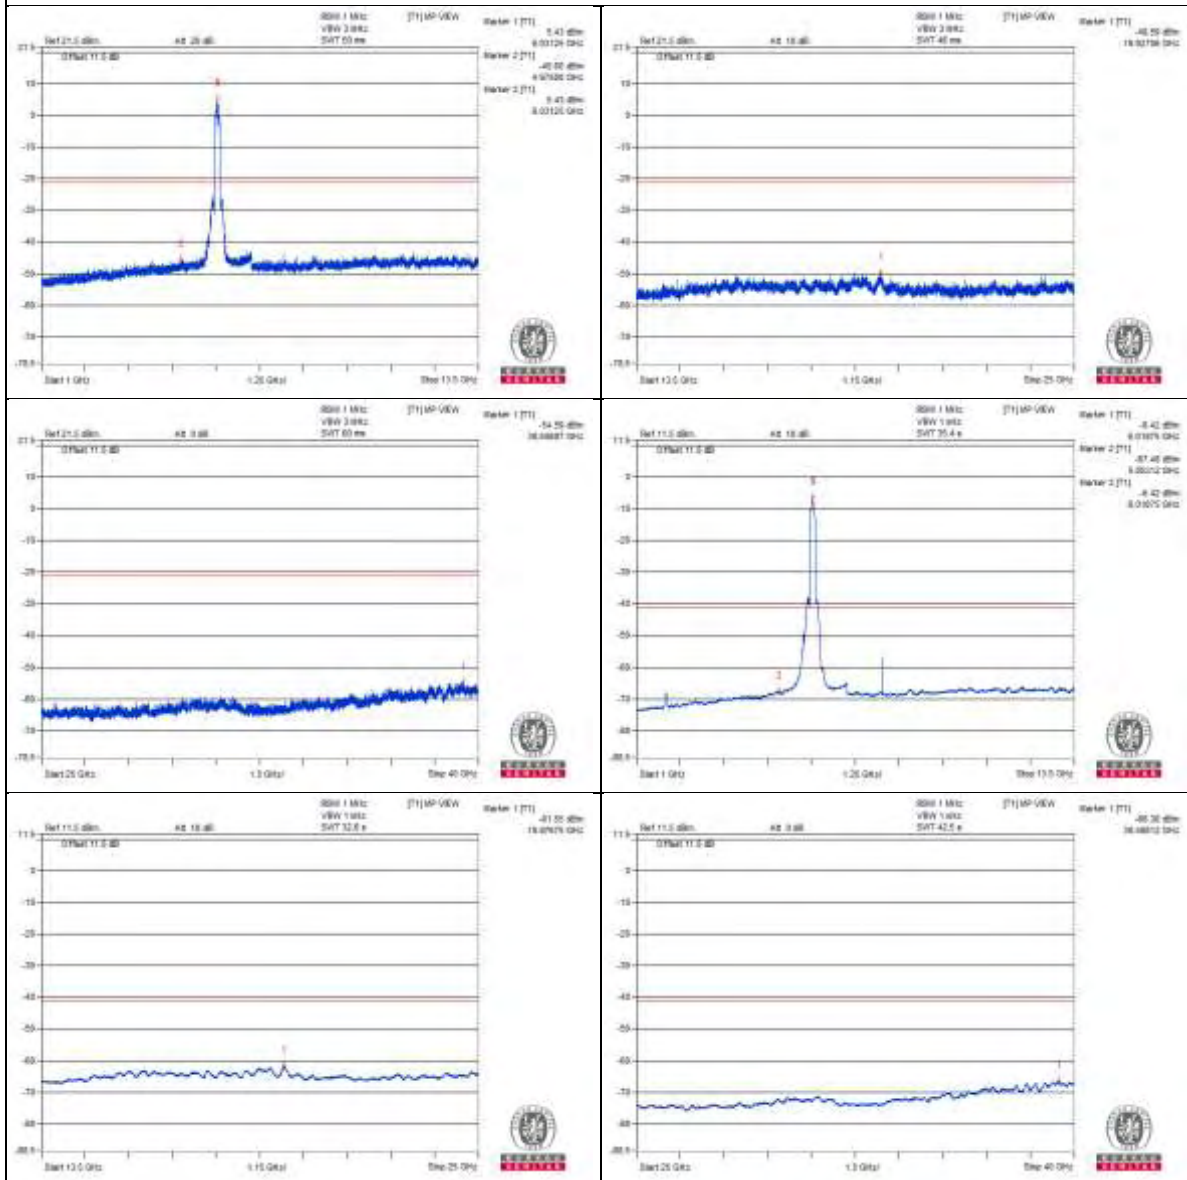

Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5899.92 PK	81.67	88.2	-6.53	-28.46	-22.78	8.15	-13.59
2	5889.52 AV	66.67	68.2	-1.53	-41.18	-38.67	8.15	-28.59


Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8


d = measurement distance in 3 meters.

* The unwanted emission was verified and the test result was passed by radiated measurement.

Chain 0

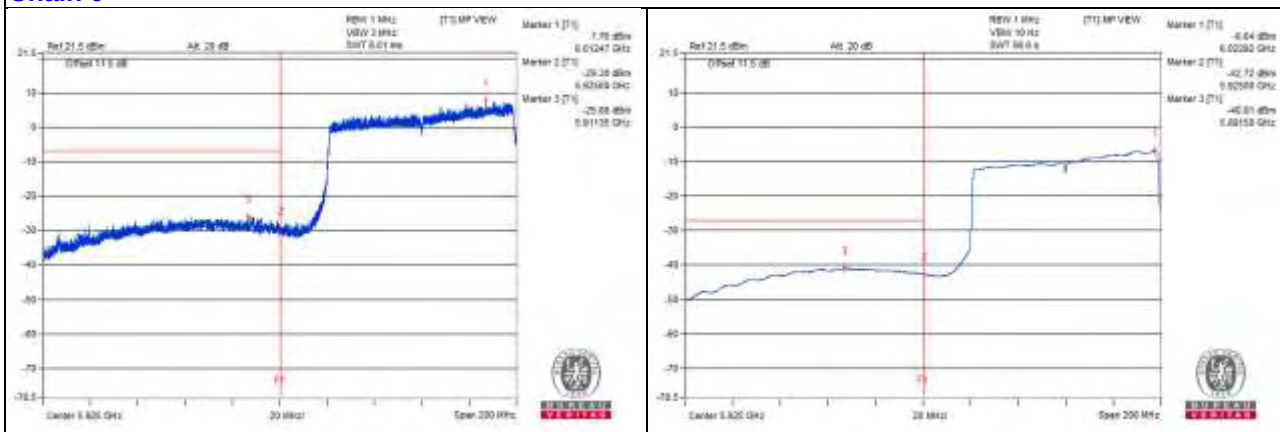

Chain 1

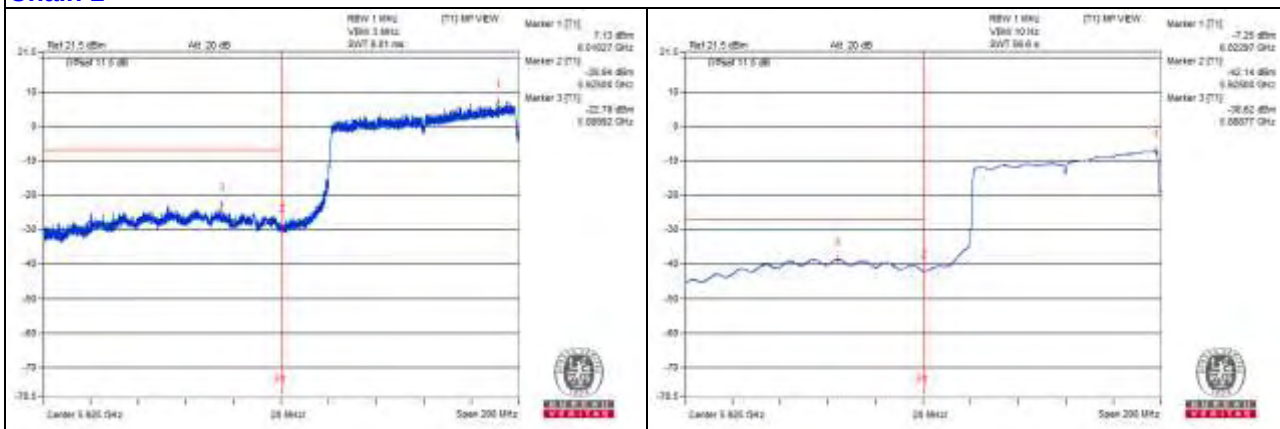

802.11ax (HE160) - Channel 47

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	1982.81 PK	54.99	74	-19.01	-50.96	-52.01	8.17	-40.27
2	1981.25 AV	38.31	54	-15.69	-68.17	-68.09	8.17	-56.95
3	5481.25 PK	58.66	88.2	-29.54	-48.48	-47.17	8.17	-36.6
4	5485.93 AV	39.51	68.2	-28.69	-67.16	-66.72	8.17	-55.75
5	5759.37 PK	61.71	88.2	-26.49	-43.56	-46.34	8.17	-33.55
6	5759.37 AV	53.74	68.2	-14.46	-51.06	-55.37	8.17	-41.52
7	4118.75 PK	58.11	74	-15.89	-48.05	-48.63	8.17	-37.15
8	4123.43 AV	37.4	54	-16.6	-68.77	-69.32	8.17	-57.86
9	12367.18 PK	60.66	74	-13.34	-45.43	-46.17	8.17	-34.6
10	12370.31 AV	40.24	54	-13.76	-66.61	-65.83	8.17	-55.02
11	18558.56 PK	53.32	74	-20.68	-52.58	-53.74	8.17	-41.94
12	18560 AV	42.52	54	-11.48	-63.91	-63.94	8.17	-52.74

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

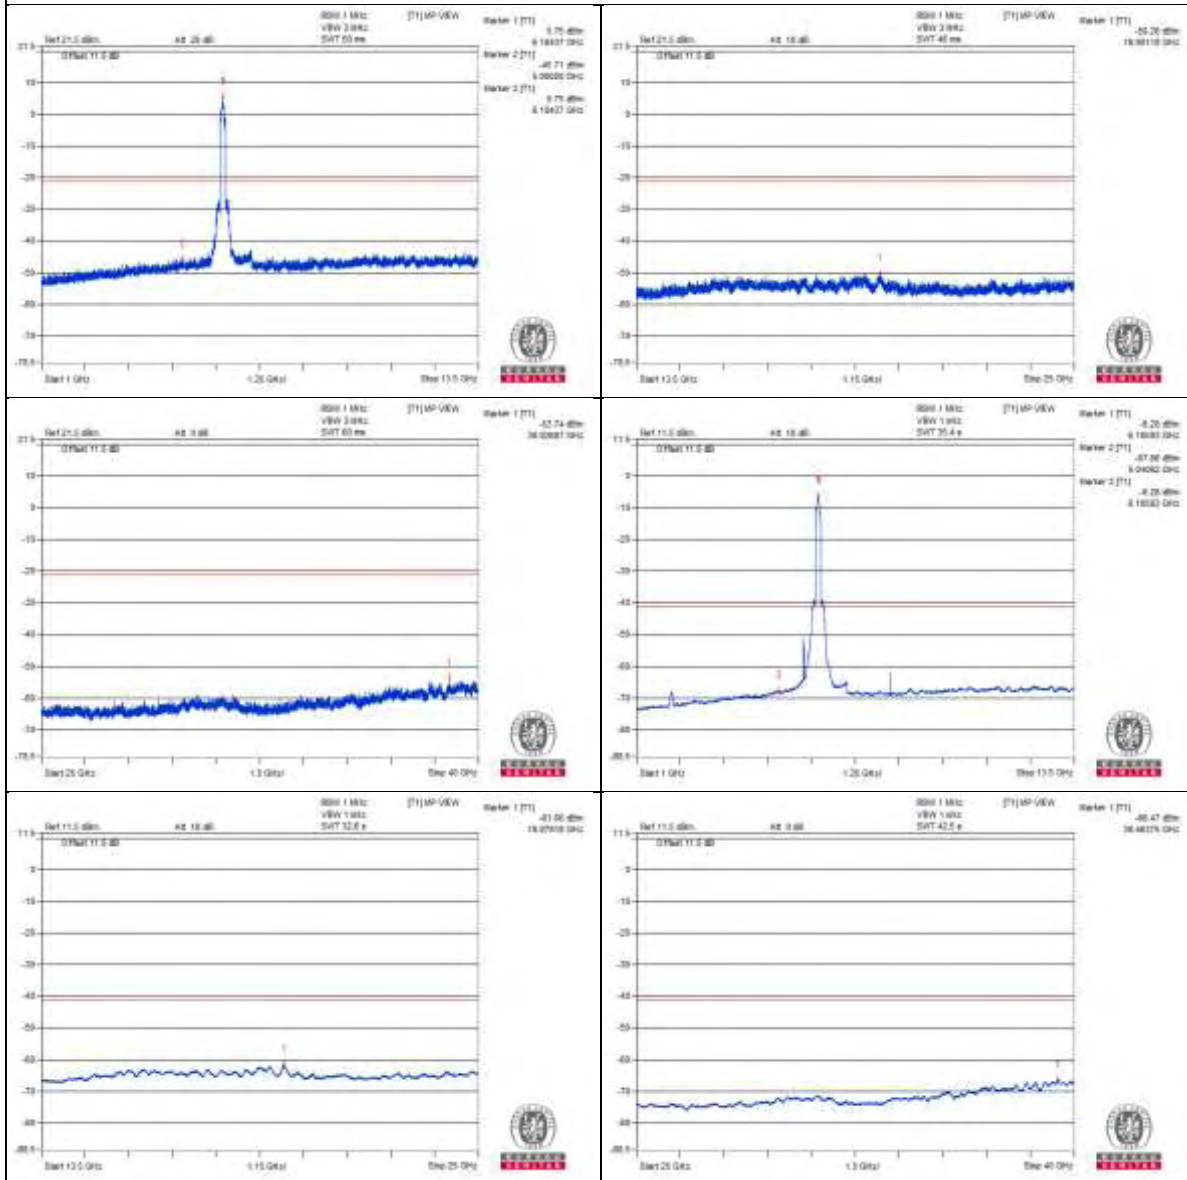

Chain 1

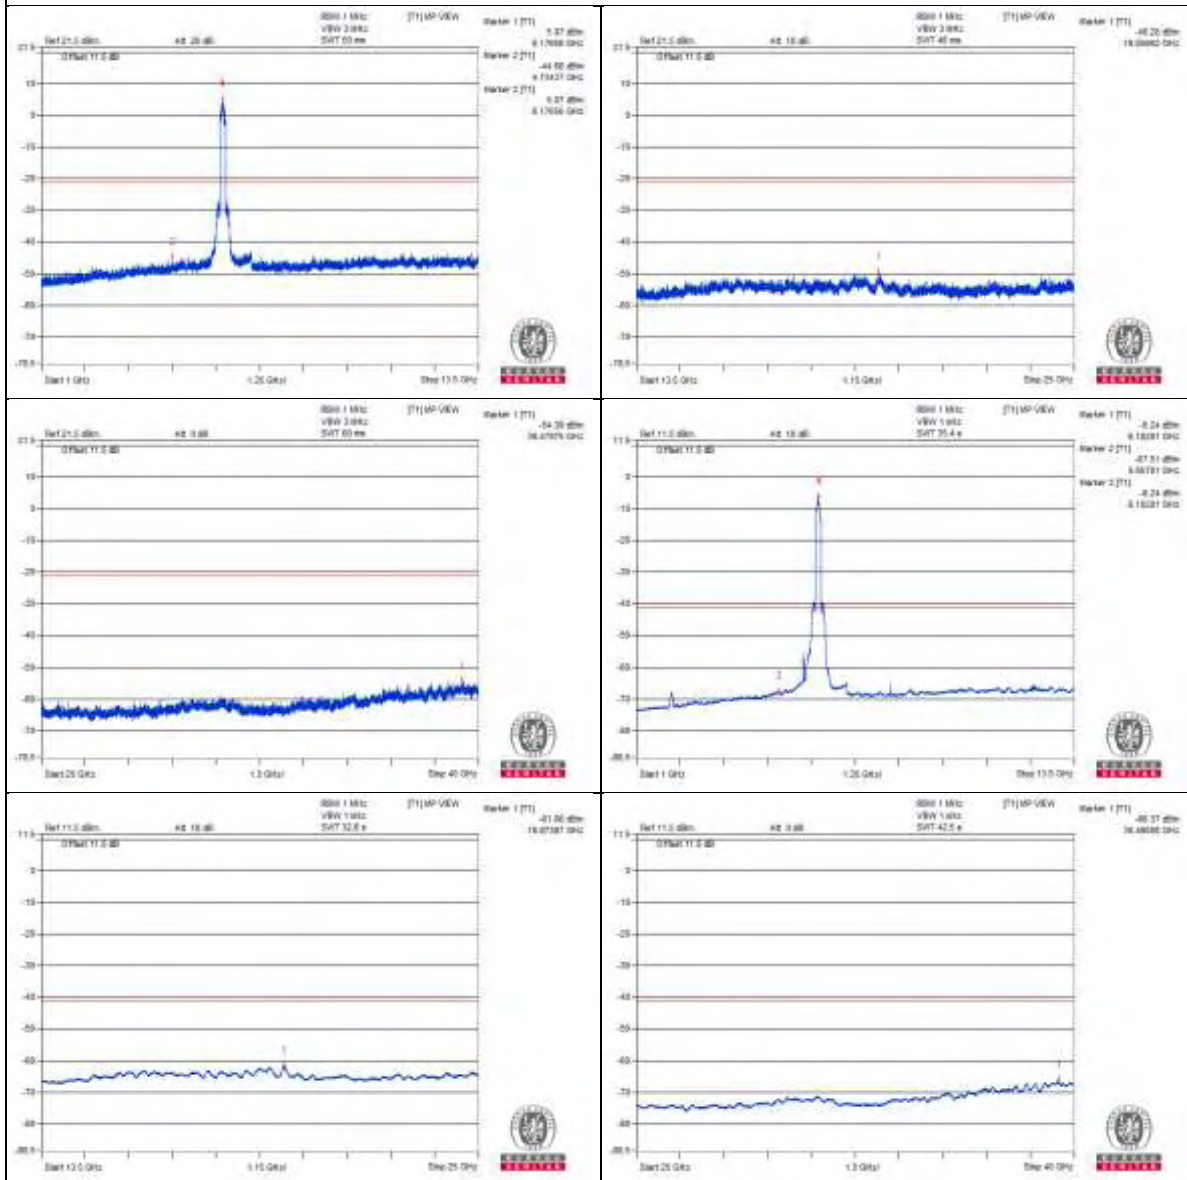

802.11ax (HE160) - Channel 79

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	2140.62 PK	55.86	74	-18.14	-51.94	-49.55	8.17	-39.4
2	2137.5 AV	38.12	54	-15.88	-68.63	-68.04	8.17	-57.14
3	5487.5 PK	59.67	88.2	-28.53	-46.01	-47.7	8.17	-35.59
4	5485.93 AV	38.79	68.2	-29.41	-67.79	-67.51	8.17	-56.47
5	5759.37 PK	60.07	88.2	-28.13	-47.72	-45.34	8.17	-35.19
6	5759.37 AV	49.77	68.2	-18.43	-57.83	-55.76	8.17	-45.49
7	4225 PK	58.57	74	-15.43	-47.57	-48.2	8.17	-36.69
8	4229.68 AV	36.69	54	-17.31	-69.5	-70.01	8.17	-58.57
9	12689.06 PK	60.86	74	-13.14	-46.73	-44.67	8.17	-34.4
10	12692.18 AV	39.93	54	-14.07	-67.23	-65.89	8.17	-55.33
11	19038.68 PK	52.95	74	-21.05	-54.93	-52.41	8.17	-42.31
12	19030.06 AV	41.91	54	-12.09	-64.53	-64.54	8.17	-53.35

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

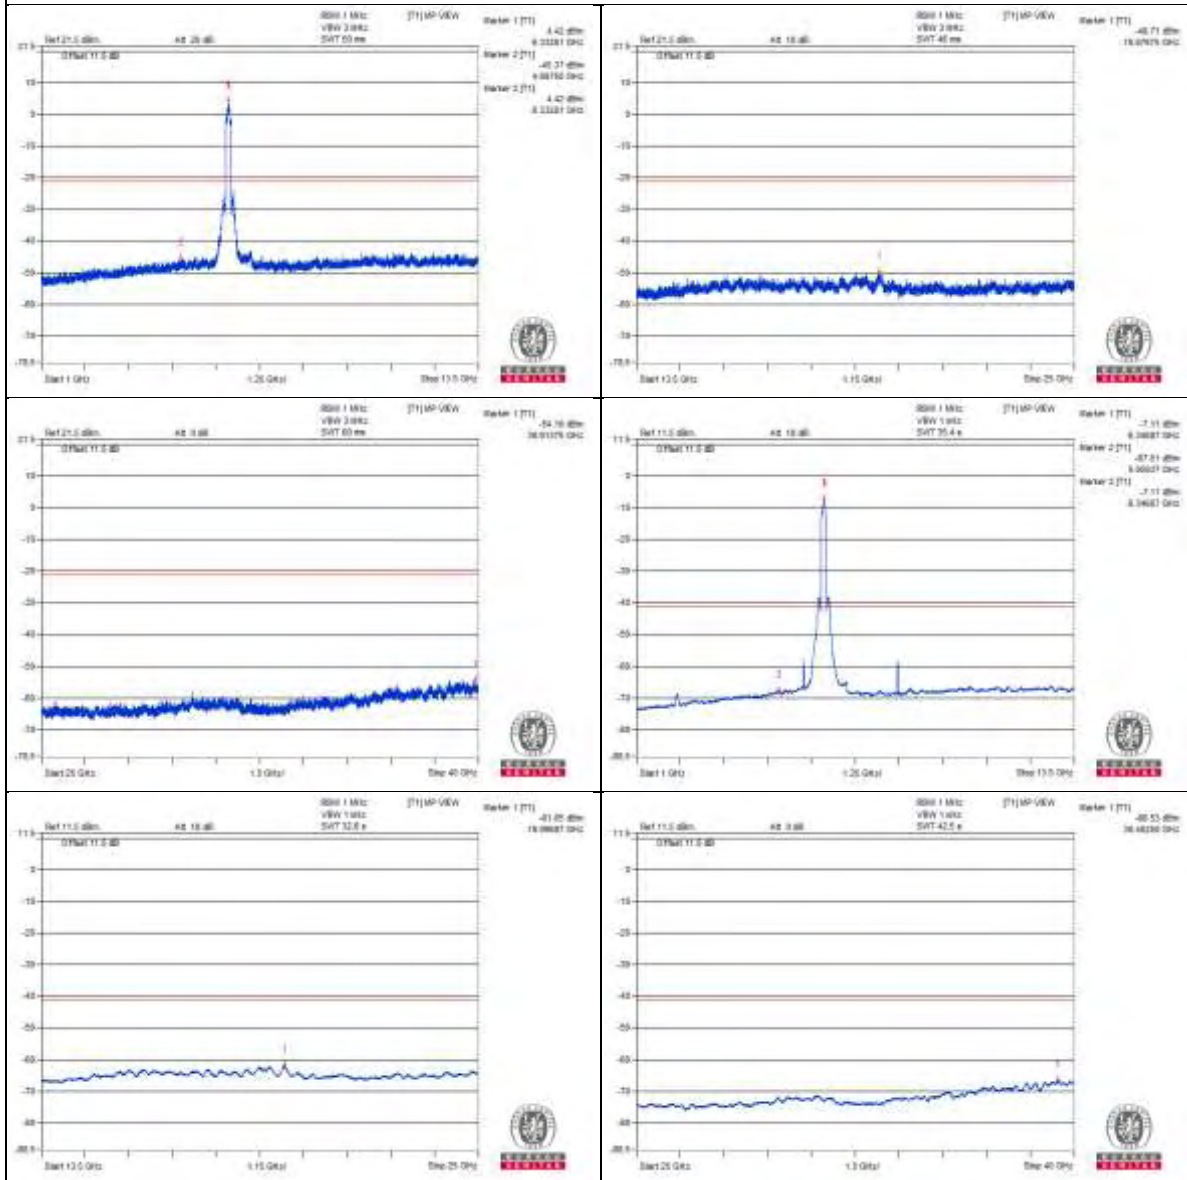

Chain 1

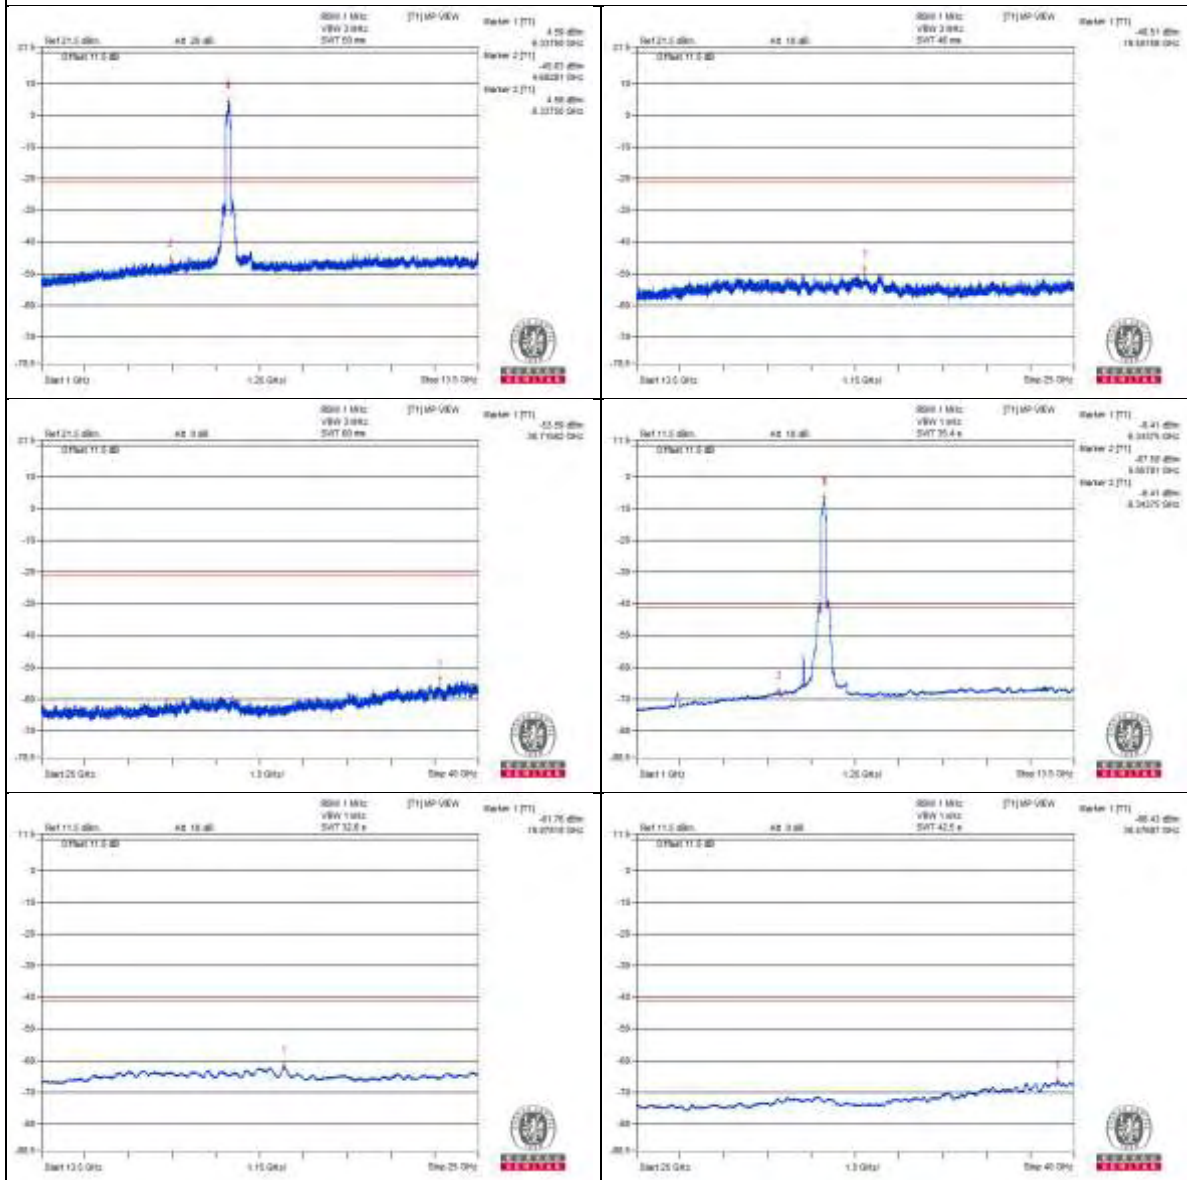

802.11ax (HE160) - Channel 143

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	2462.5 PK	56.31	88.2	-31.89	-50.7	-49.63	8.17	-38.95
2	2457.81 AV	39.37	68.2	-28.83	-67.4	-66.77	8.17	-55.89
3	5484.37 PK	59.94	88.2	-28.26	-47.42	-45.74	8.17	-35.32
4	5482.81 AV	38.64	68.2	-29.56	-67.92	-67.68	8.17	-56.62
5	5759.37 PK	60.3	88.2	-27.9	-46.43	-45.87	8.17	-34.96
6	5759.37 AV	50.66	68.2	-17.54	-56.46	-55.19	8.17	-44.6
7	4442.18 PK	57.69	88.2	-30.51	-48.42	-49.1	8.17	-37.57
8	4443.75 AV	36.92	68.2	-31.28	-69.46	-69.59	8.17	-58.34
9	13325 PK	60.51	74	-13.49	-45.81	-46.05	8.17	-34.75
10	13329.68 AV	39.25	54	-14.75	-67.66	-66.76	8.17	-56.01
11	19997.5 PK	53.3	74	-20.7	-54.29	-52.24	8.17	-41.96
12	19990.31 AV	42.34	54	-11.66	-64.1	-64.11	8.17	-52.92

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

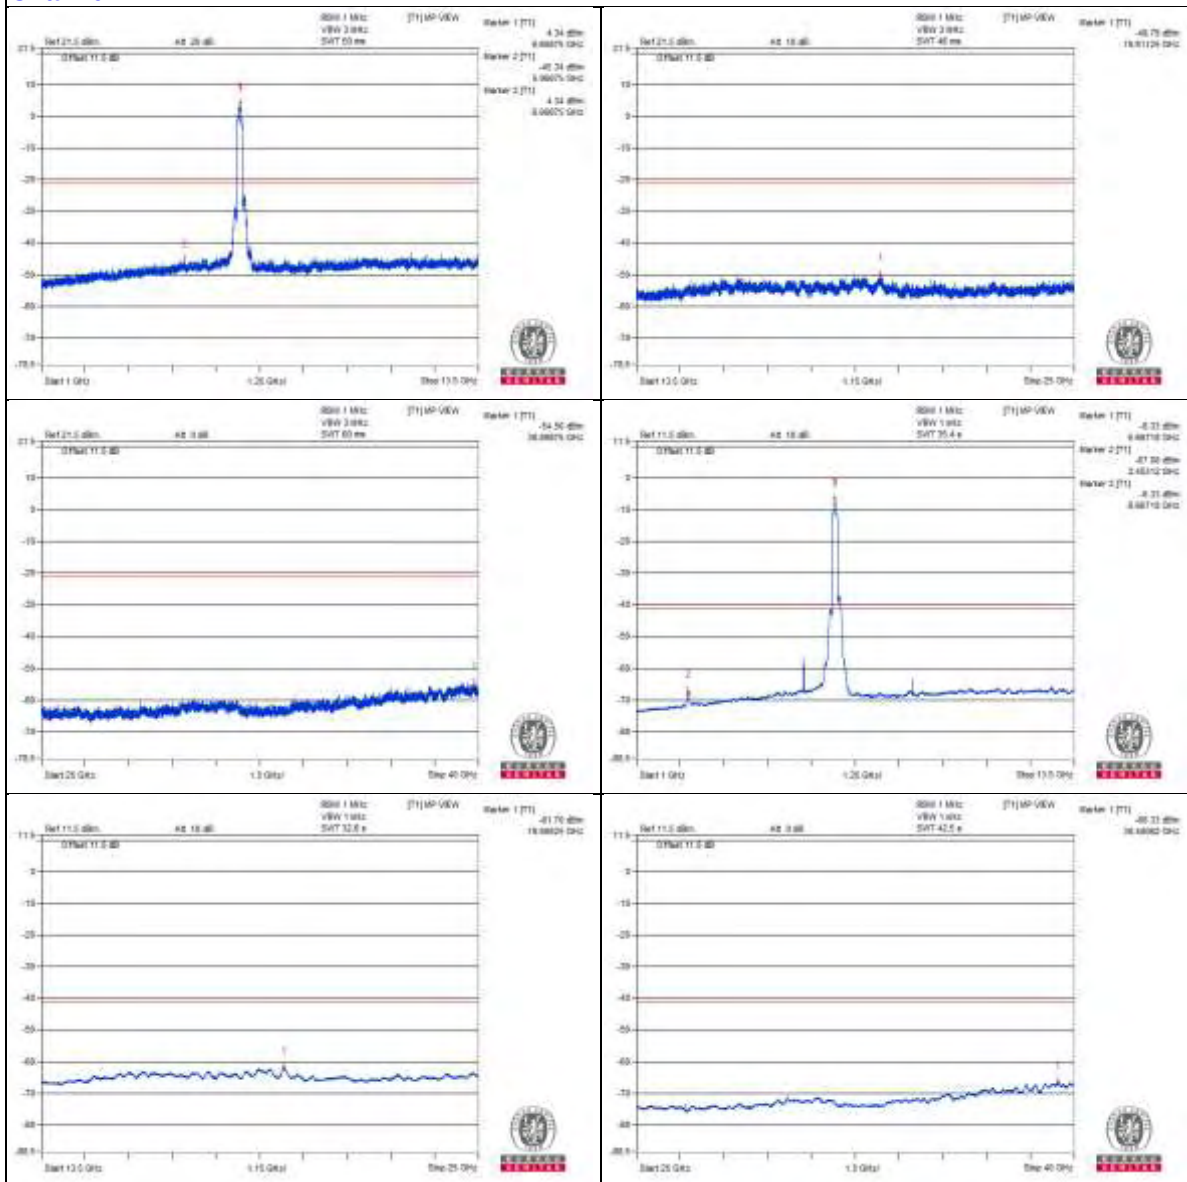

Chain 1

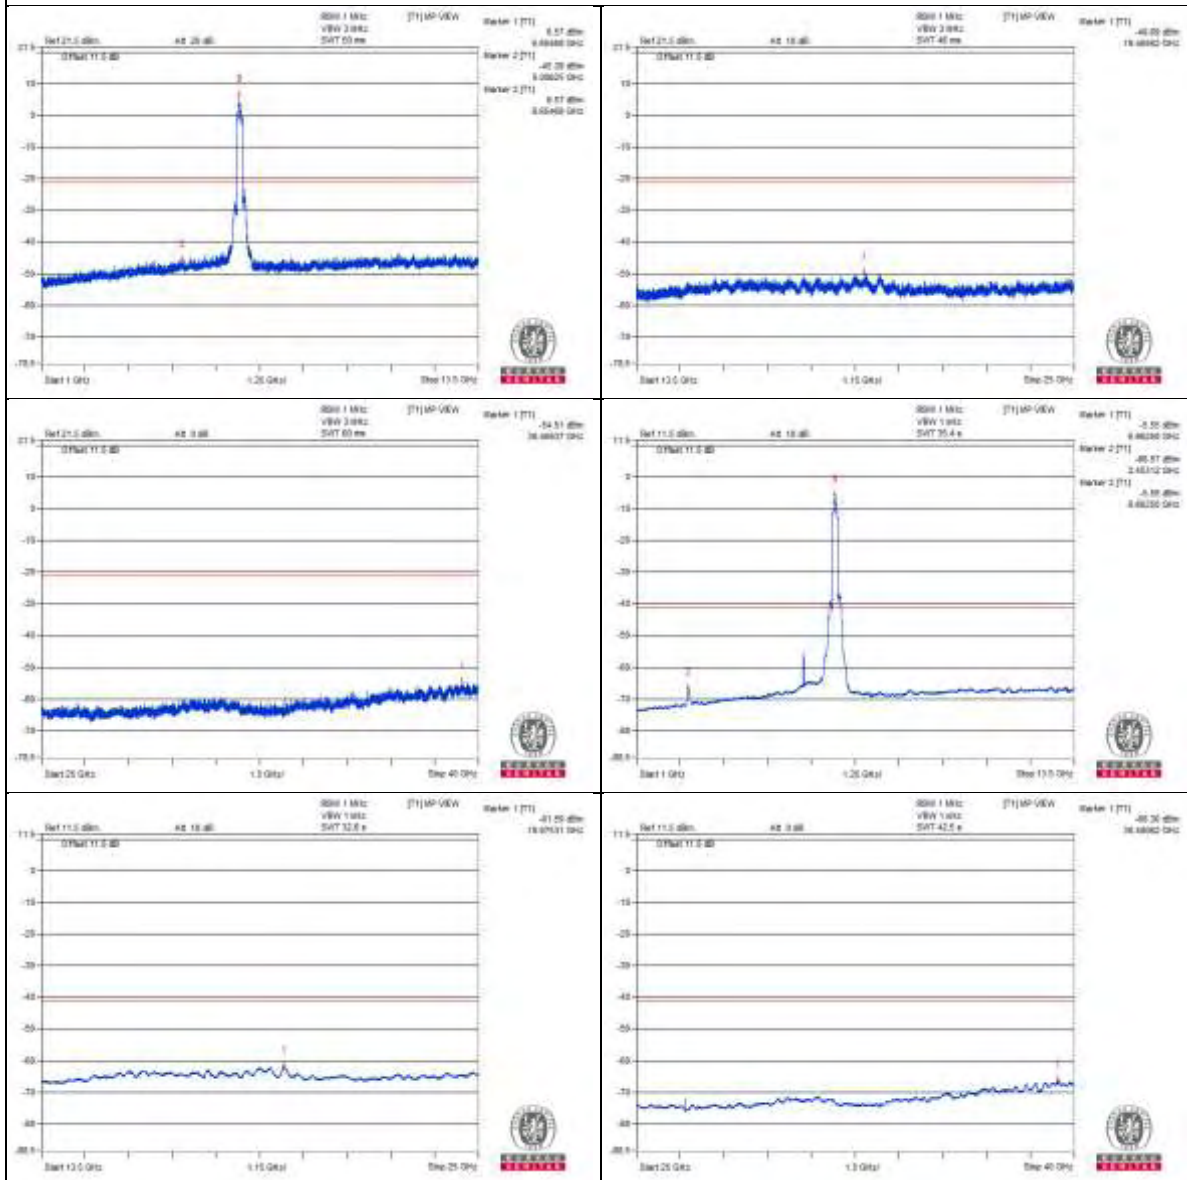

Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	7164.72 PK	59.94	88.2	-28.26	-47.46	-45.72	8.17	-35.32
2	7210.05 AV	47.36	68.2	-20.84	-58.8	-59.39	8.17	-47.9


Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8


d = measurement distance in 3 meters.

* The unwanted emission was verified and the test result was passed by radiated measurement.

Chain 0

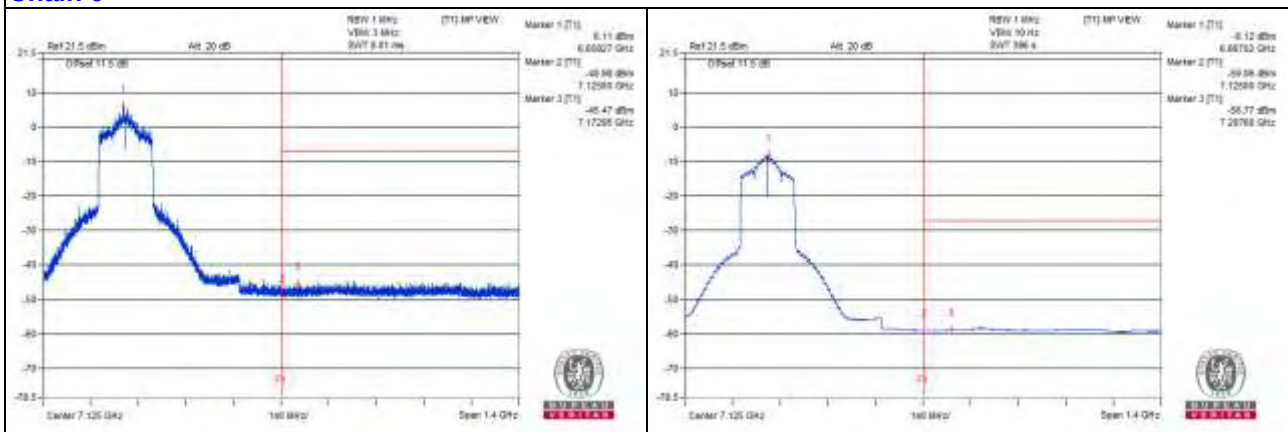

Chain 1

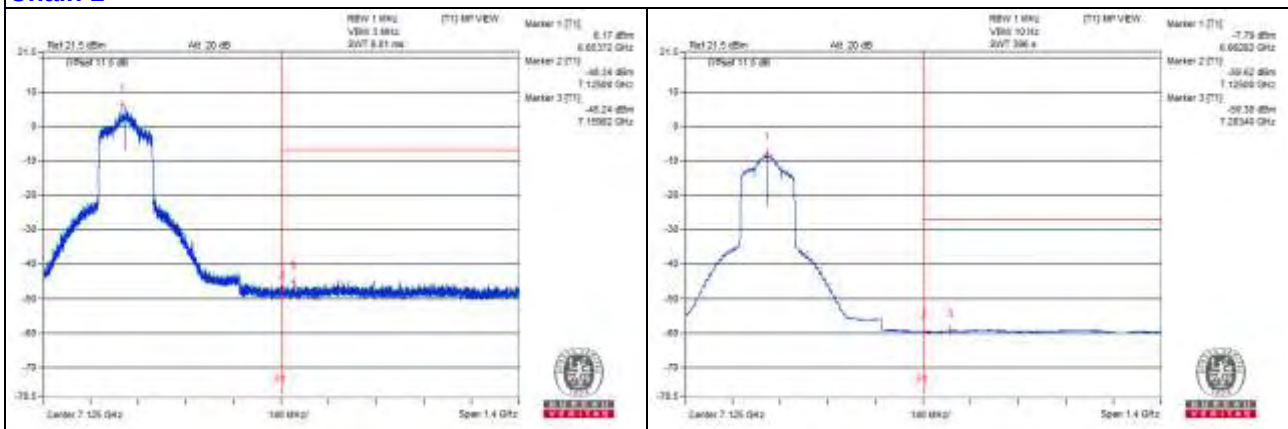

20MHz Preamble

RU26

Channel 2

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	1726.56 PK	54.55	74	-19.45	-51.26	-52.63	8.17	-40.71
2	1732.81 AV	33.59	54	-20.41	-73.16	-72.56	8.17	-61.67
3	5479.68 PK	59.84	88.2	-28.36	-47.34	-45.96	8.17	-35.42
4	5487.5 AV	38.14	68.2	-30.06	-68.36	-68.24	8.17	-57.12
5	5764.06 PK	58.82	88.2	-29.38	-47.19	-48.1	8.17	-36.44
6	5759.37 AV	39.65	68.2	-28.55	-65.67	-68.3	8.17	-55.61
7	7917.18 PK	59.08	88.2	-29.12	-48.02	-46.79	8.17	-36.18
8	7914.06 AV	41.36	68.2	-26.84	-64.65	-65.55	8.17	-53.9
9	11870.31 PK	59.92	74	-14.08	-45.38	-48.07	8.17	-35.34
10	11871.87 AV	38.69	54	-15.31	-67.74	-67.77	8.17	-56.57
11	17802.43 PK	52.91	74	-21.09	-53.45	-53.61	8.17	-42.35
12	17808.18 AV	42.25	54	-11.75	-64.05	-64.34	8.17	-53.01

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

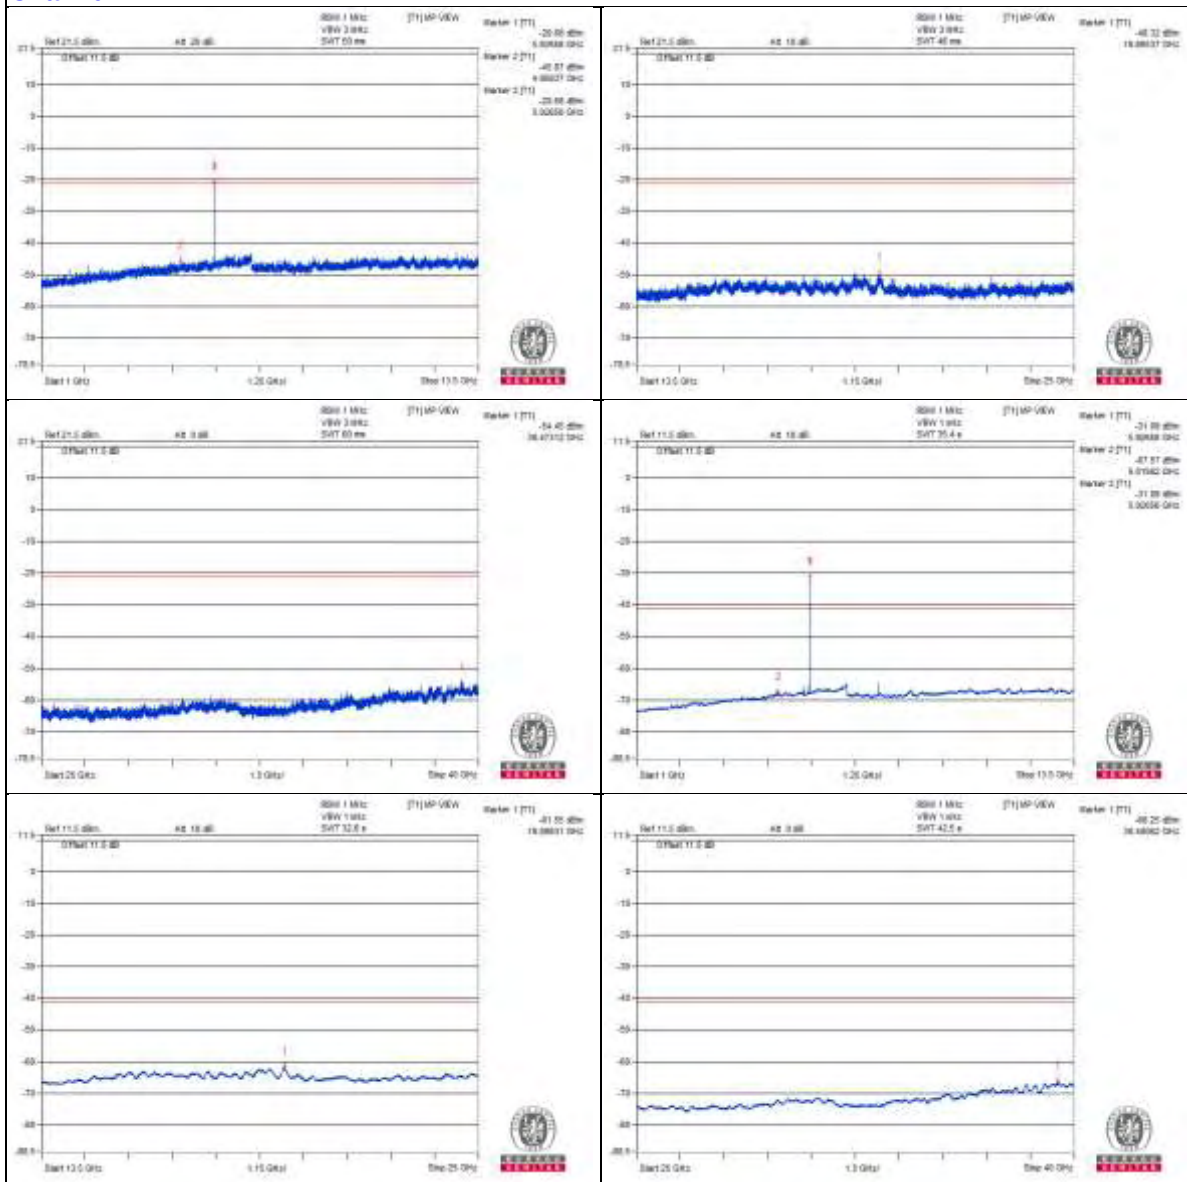

Chain 1

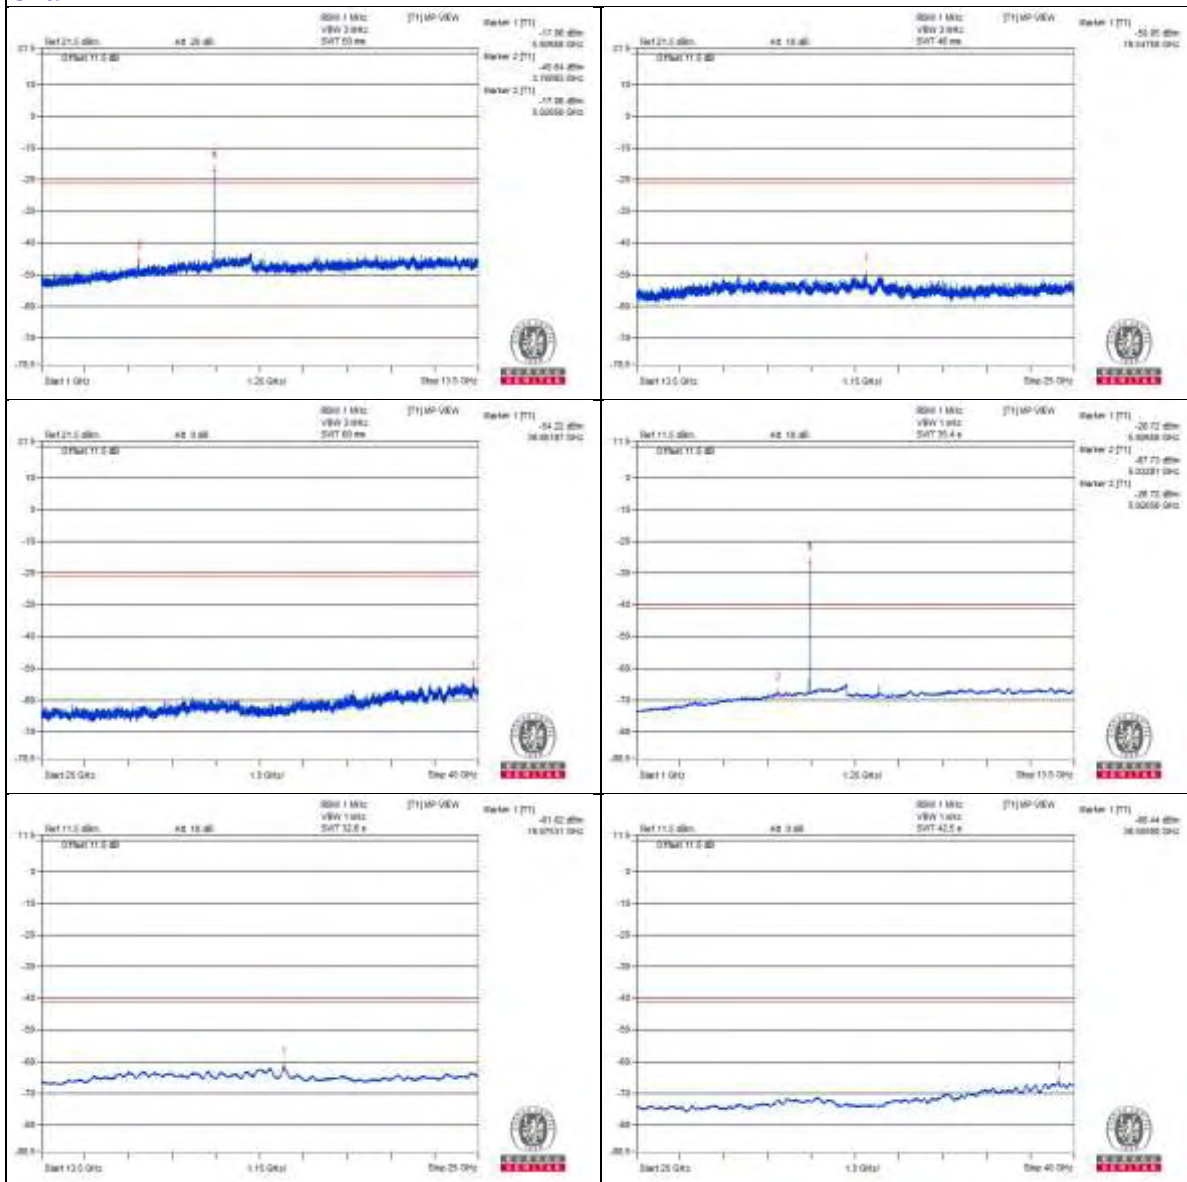

Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5925 PK	84.67	88.2	-3.53	-21.38	-22.16	8.15	-10.59
2	5925 AV	71.52	68.2	*3.32	-34.61	-35.22	8.15	-23.74


Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8


d = measurement distance in 3 meters.

* The unwanted emission was verified and the test result was passed by radiated measurement.
(Please refer APPENDIX B)

Chain 0

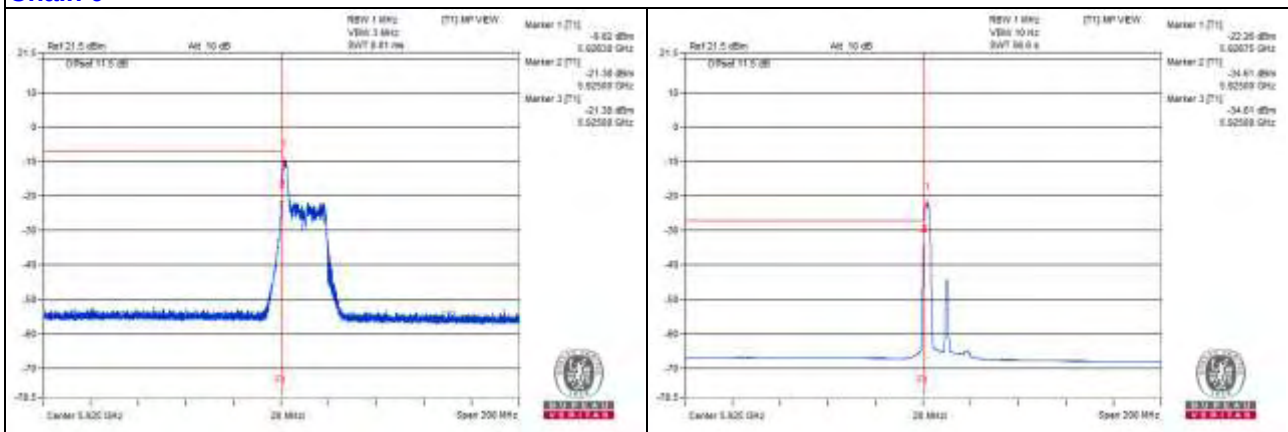

Chain 1

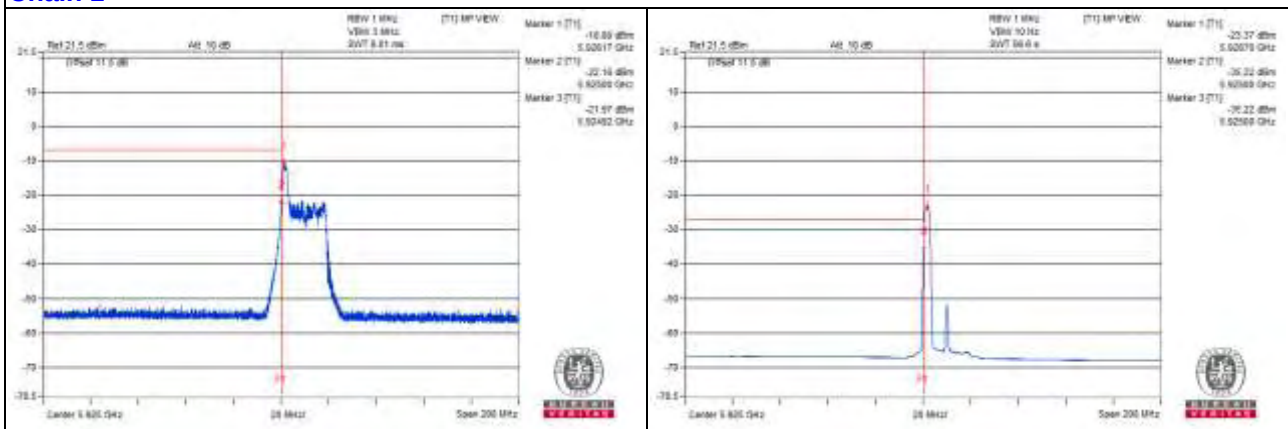

Channel 1


Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	1754.68 PK	54.78	74	-19.22	-50.95	-52.51	8.17	-40.48
2	1753.12 AV	33.96	54	-20.04	-72.59	-72.38	8.17	-61.3
3	5481.25 PK	59.39	88.2	-28.81	-47.2	-46.91	8.17	-35.87
4	5485.93 AV	38.89	68.2	-29.31	-67.14	-68	8.17	-56.37
5	5759.37 PK	63.43	88.2	-24.77	-43.37	-42.67	8.17	-31.83
6	5759.37 AV	57.07	68.2	-11.13	-50.16	-48.71	8.17	-38.19
7	7943.75 PK	59.88	88.2	-28.32	-48.05	-45.46	8.17	-35.38
8	7940.62 AV	46.11	68.2	-22.09	-58.47	-63.65	8.17	-49.15
9	11909.37 PK	60.17	74	-13.83	-45.34	-47.46	8.17	-35.09
10	11912.5 AV	39.04	54	-14.96	-67.19	-67.63	8.17	-56.22
11	17864.25 PK	54.59	74	-19.41	-51.82	-51.89	8.17	-40.67
12	17864.25 AV	43.03	54	-10.97	-63.55	-63.28	8.17	-52.23


Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.



Chain 1

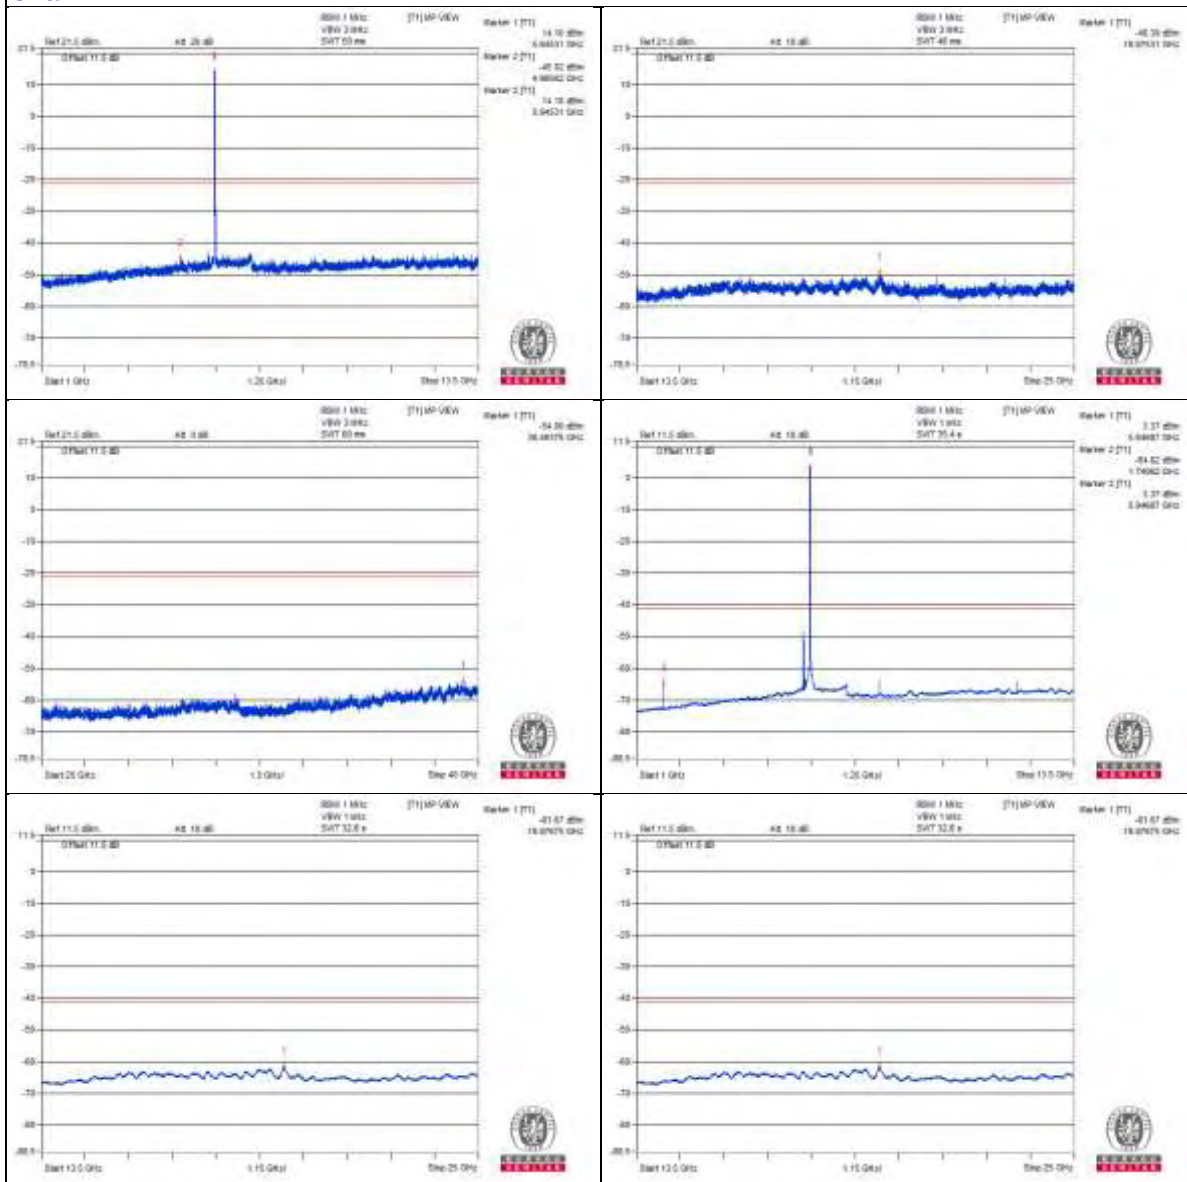

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5855.75 PK	71.68	88.2	-16.52	-33.37	-36.76	8.15	-23.58
2	5909.9 AV	58.17	68.2	-10.03	-48.33	-48.17	8.15	-37.09

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

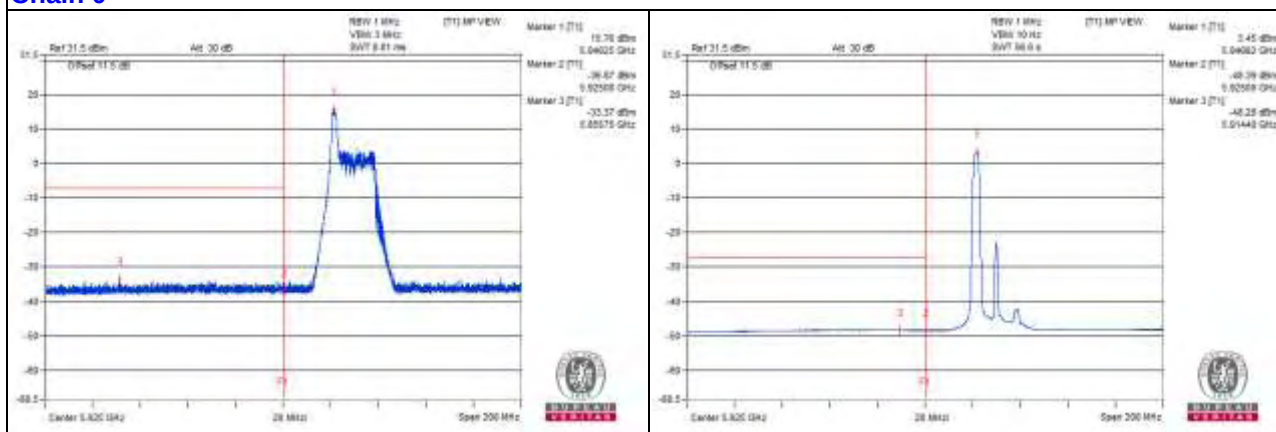

Chain 1

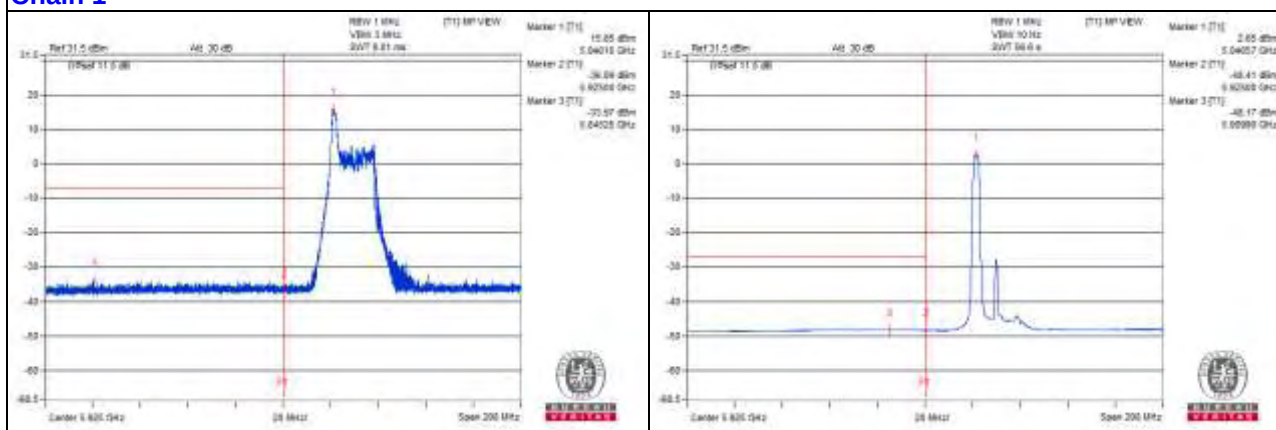

Channel 45

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	1970.31 PK	55.81	74	-18.19	-51.49	-49.91	8.17	-39.45
2	1968.75 AV	43.45	54	-10.55	-62.75	-63.25	8.17	-51.81
3	5484.37 PK	59.17	88.2	-29.03	-47.91	-46.71	8.17	-36.09
4	5484.37 AV	39.31	68.2	-28.89	-66.92	-67.35	8.17	-55.95
5	5759.37 PK	63.47	88.2	-24.73	-42.74	-43.22	8.17	-31.79
6	5759.37 AV	58.88	68.2	-9.32	-46.97	-48.24	8.17	-36.38
7	8232.81 PK	59.3	74	-14.7	-46.44	-47.98	8.17	-35.96
8	8232.81 AV	44.76	54	-9.24	-59.98	-64.51	8.17	-50.5
9	12348.43 PK	61.92	74	-12.08	-43.14	-46.54	8.17	-33.34
10	12350 AV	44.23	54	-9.77	-62.61	-61.85	8.17	-51.03
11	18521.18 PK	54.04	74	-19.96	-54.09	-51.18	8.17	-41.22
12	18524.06 AV	42.44	54	-11.56	-64.14	-63.86	8.17	-52.82

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

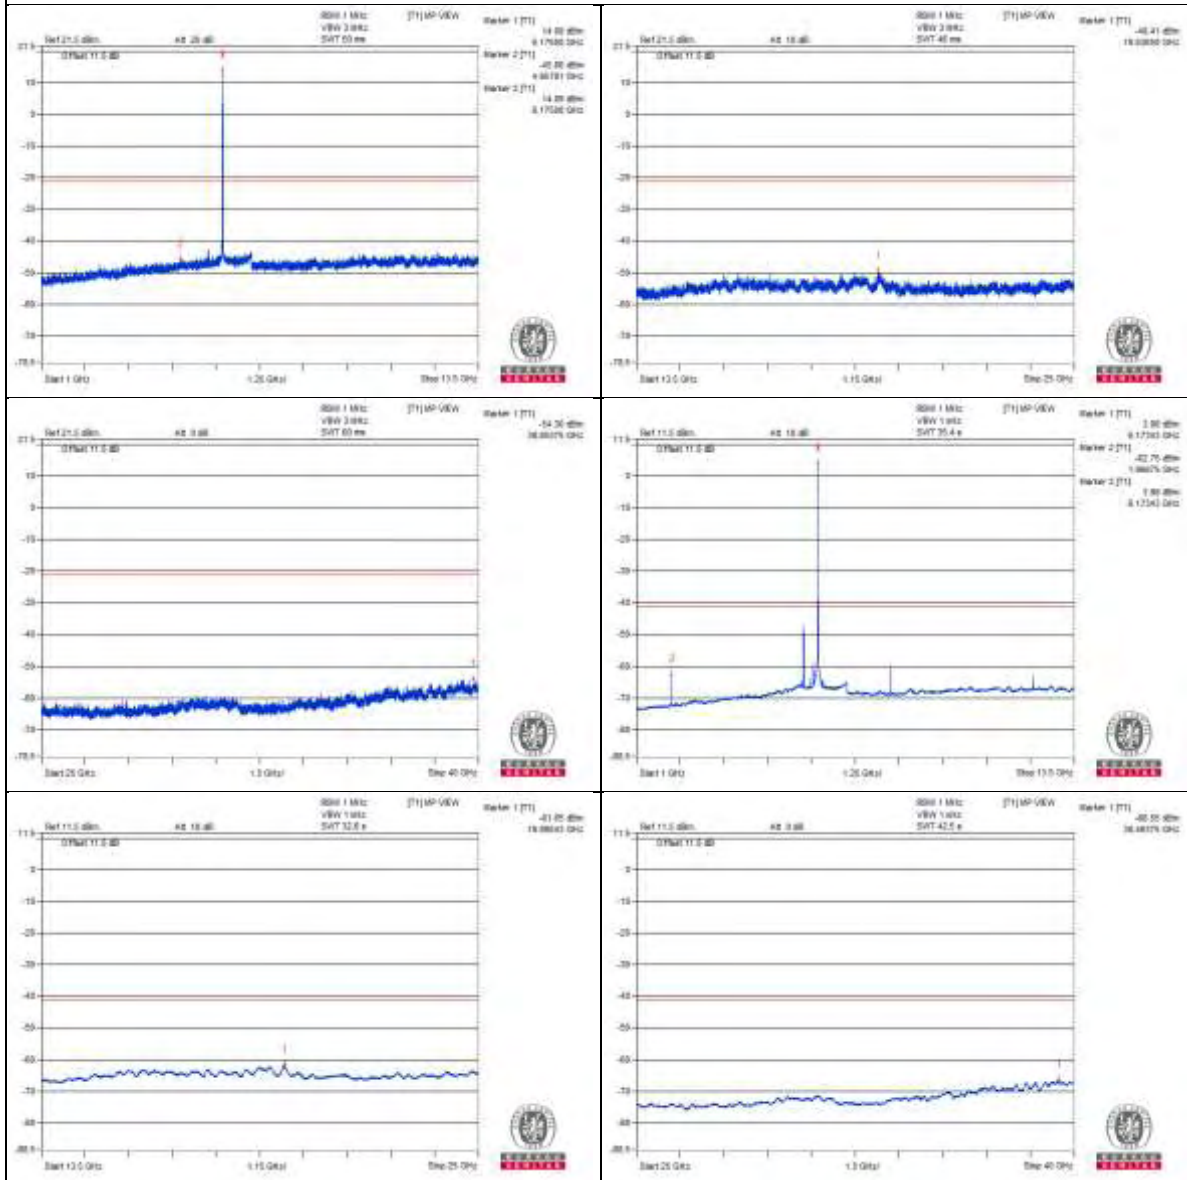

Chain 1

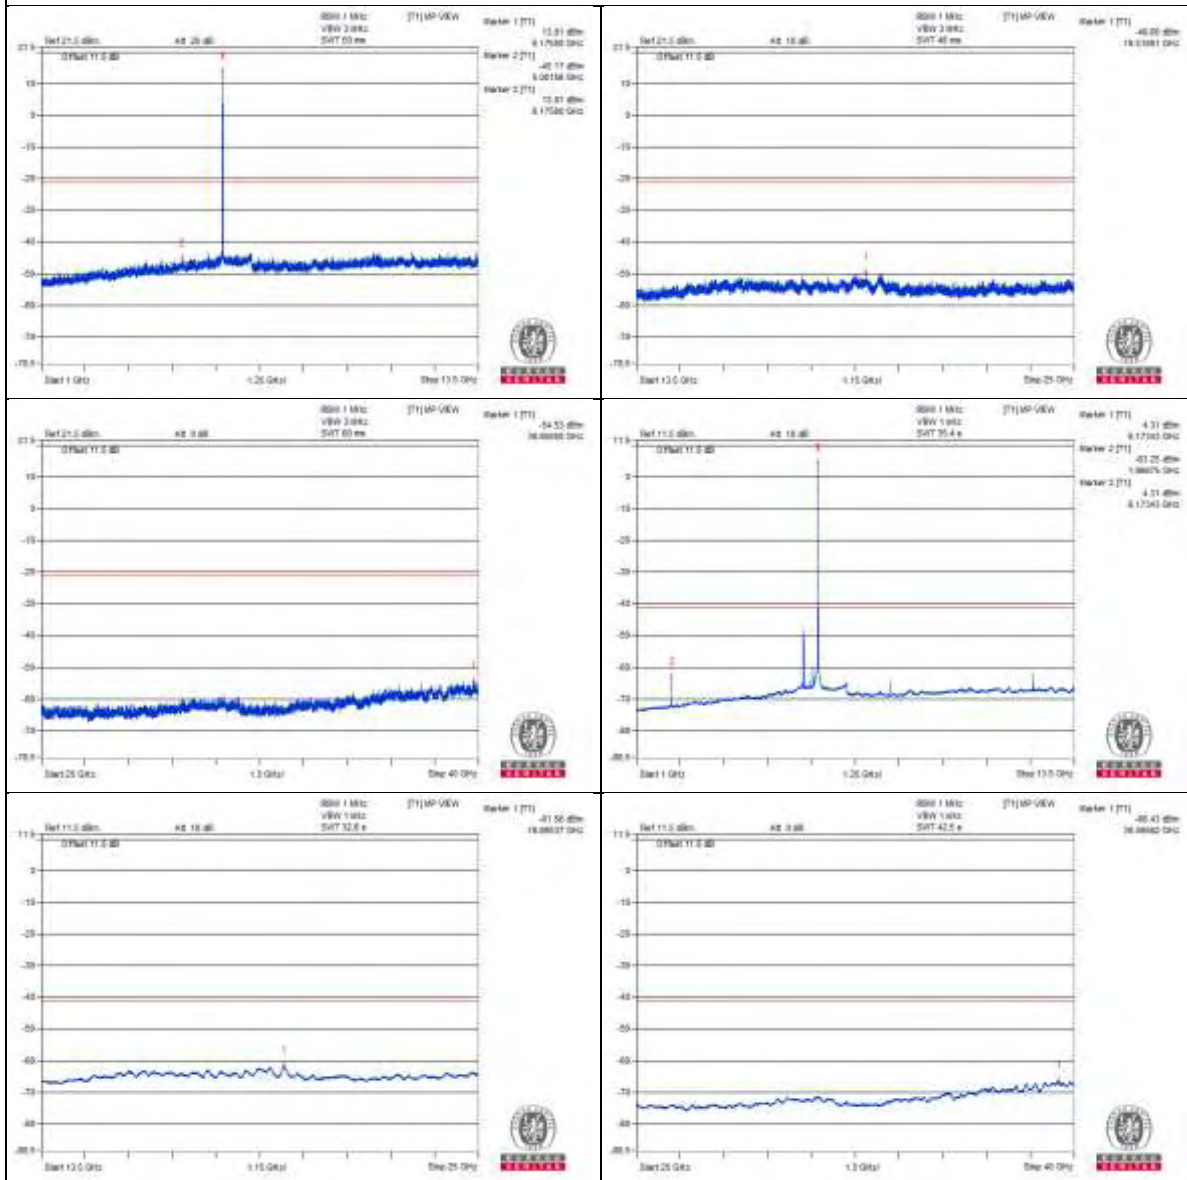

Channel 93


Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	2214.06 PK	54.89	74	-19.11	-51.62	-51.49	8.17	-40.37
2	2214.06 AV	34.27	54	-19.73	-72.04	-72.3	8.17	-60.99
3	5479.68 PK	59.5	88.2	-28.7	-45.65	-48.78	8.17	-35.76
4	5485.93 AV	38.78	68.2	-29.42	-67.66	-67.67	8.17	-56.48
5	5759.37 PK	61.51	88.2	-26.69	-45.5	-44.42	8.17	-33.75
6	5759.37 AV	55.71	68.2	-12.49	-53.6	-49.02	8.17	-39.55
7	8550 PK	58.68	88.2	-29.52	-47.98	-47.56	8.17	-36.58
8	8553.12 AV	47.34	68.2	-20.86	-56.35	-68.37	8.17	-47.92
9	12832.81 PK	61.05	88.2	-27.15	-45.3	-45.49	8.17	-34.21
10	12834.37 AV	39.79	68.2	-28.41	-66.57	-66.73	8.17	-55.47
11	19250 PK	54.29	74	-19.71	-52.3	-52	8.17	-40.97
12	19250 AV	43.88	54	-10.12	-62.64	-62.48	8.17	-51.38


Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.



Chain 1

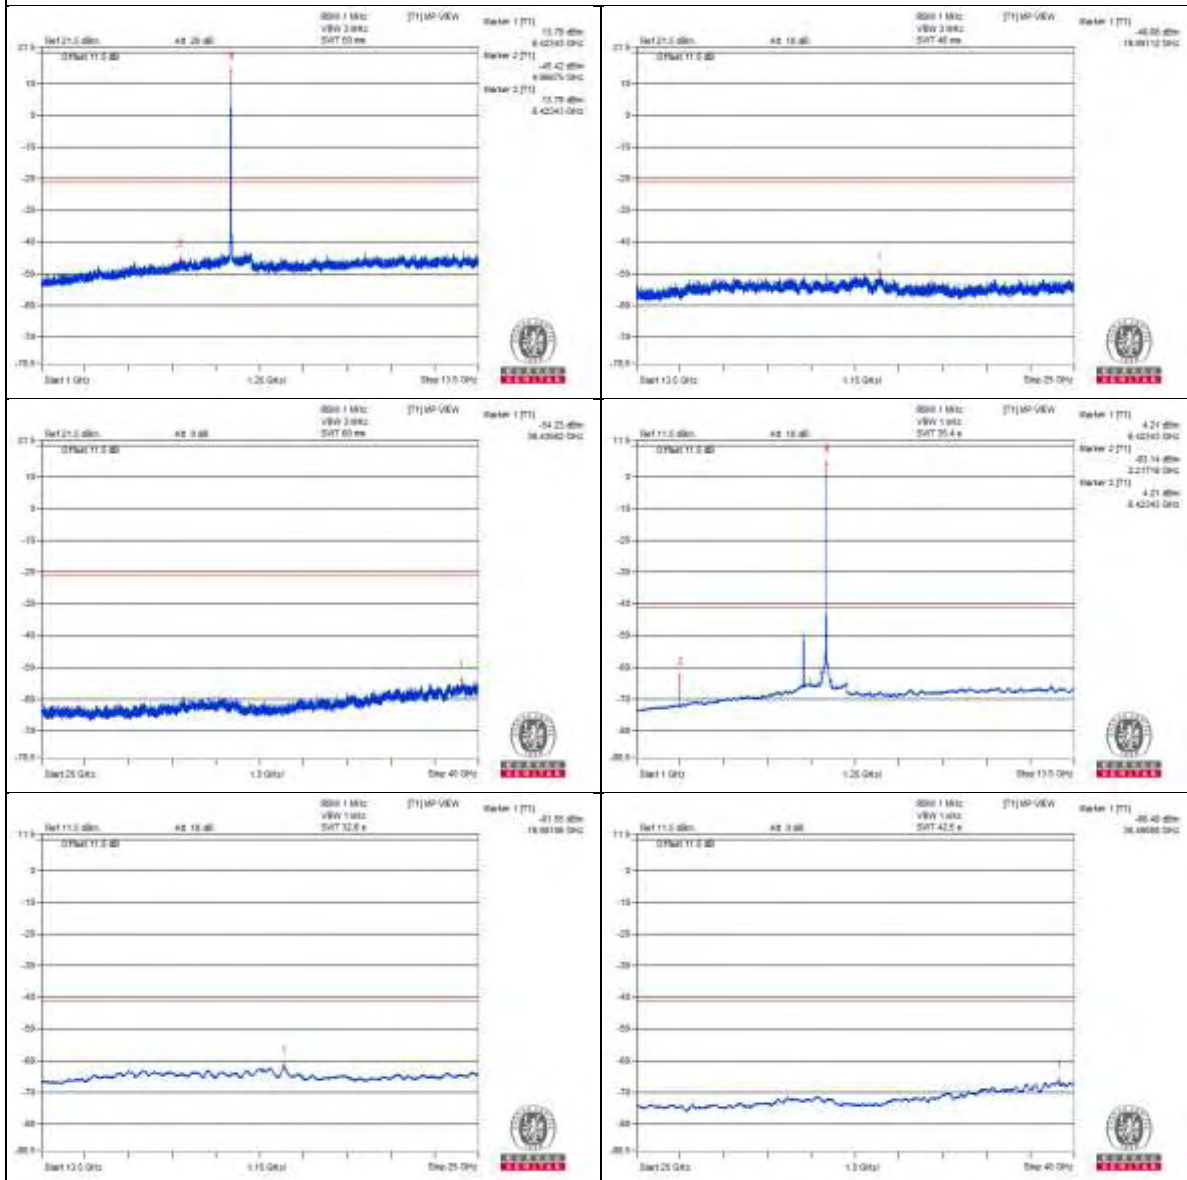

Channel 117

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	2329.68 PK	55.98	74	-18.02	-49.85	-51.17	8.17	-39.28
2	2328.12 AV	34.54	54	-19.46	-72.01	-71.8	8.17	-60.72
3	5485.93 PK	58.87	88.2	-29.33	-48.4	-46.88	8.17	-36.39
4	5481.25 AV	38.6	68.2	-29.6	-67.79	-67.9	8.17	-56.66
5	5759.37 PK	62.02	88.2	-26.18	-45.91	-43.31	8.17	-33.24
6	5759.37 AV	56.29	68.2	-11.91	-52.59	-48.6	8.17	-38.97
7	8714.06 PK	59.03	88.2	-29.17	-47.38	-47.45	8.17	-36.23
8	8714.06 AV	47.42	68.2	-20.78	-56.29	-68.13	8.17	-47.84
9	13075 PK	60.23	88.2	-27.97	-46.05	-46.38	8.17	-35.03
10	13070.31 AV	39.54	68.2	-28.66	-67.01	-66.79	8.17	-55.72
11	19603.62 PK	53.12	74	-20.88	-53.05	-53.6	8.17	-42.14
12	19605.06 AV	42.5	54	-11.5	-63.98	-63.91	8.17	-52.76

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

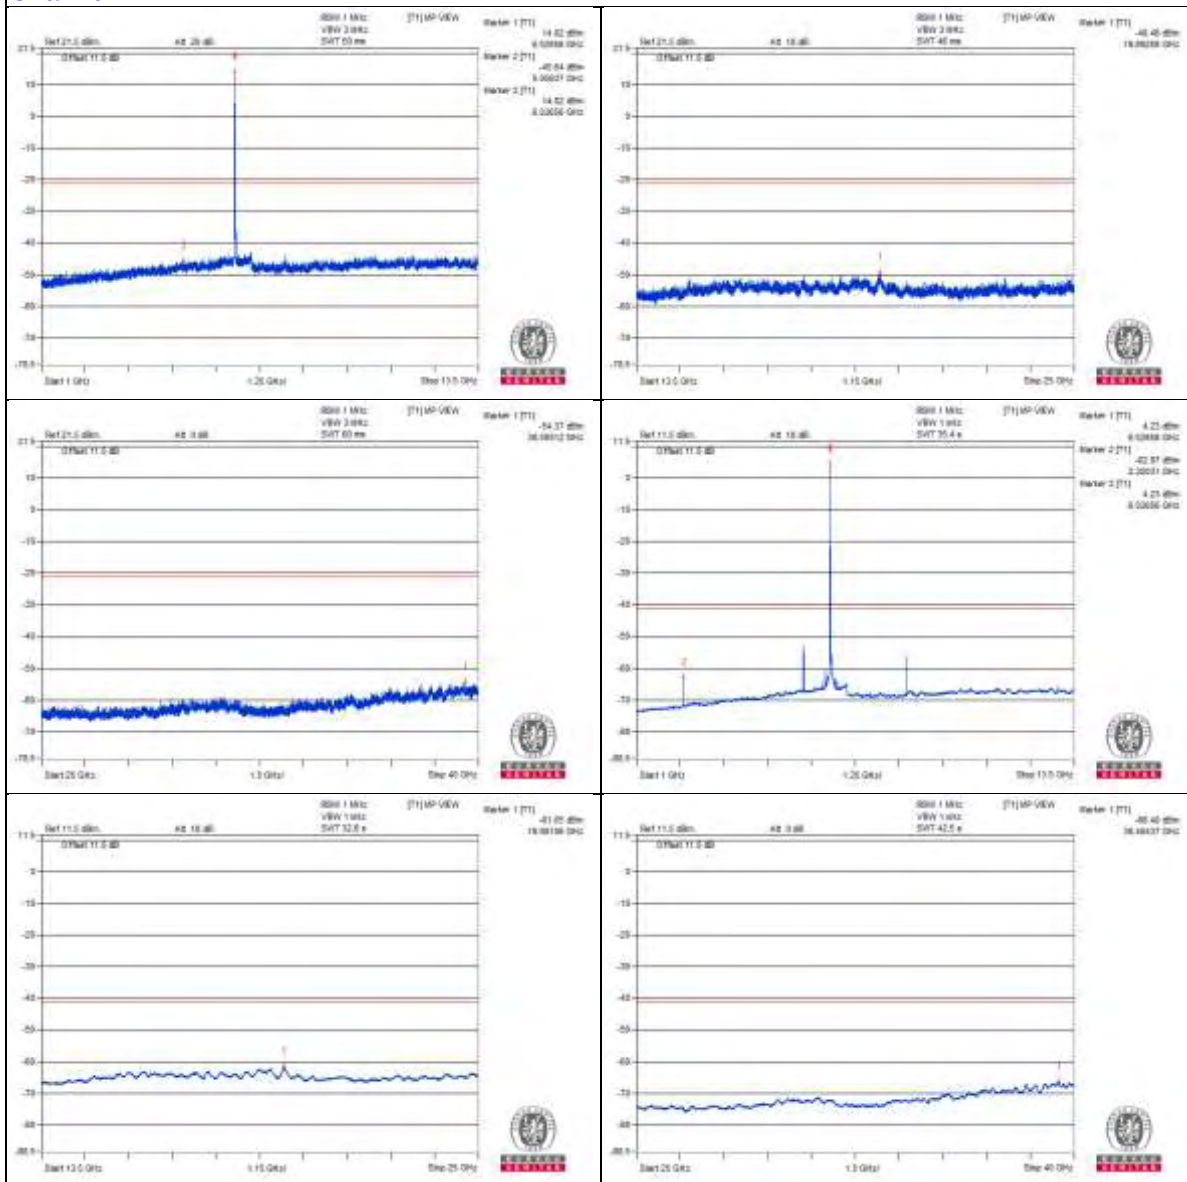

Chain 1

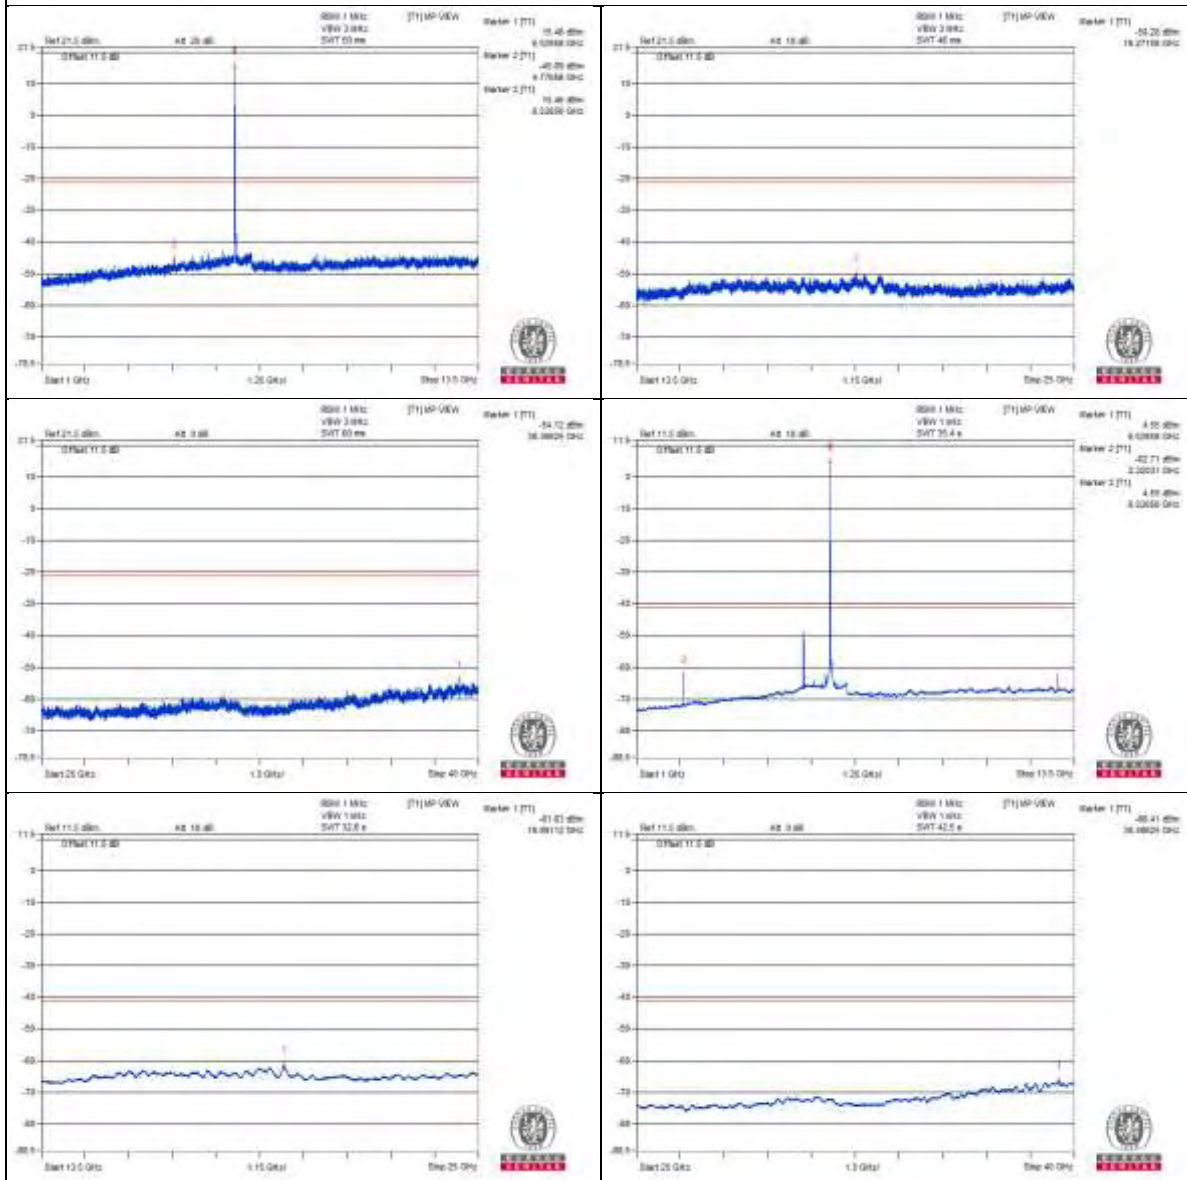

Channel 149

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	2487.5 PK	57.05	74	-16.95	-48.55	-50.43	8.17	-38.21
2	2489.06 AV	44.12	54	-9.88	-62.06	-62.6	8.17	-51.14
3	5485.93 PK	58.97	88.2	-29.23	-48.11	-46.91	8.17	-36.29
4	5485.93 AV	38.53	68.2	-29.67	-68	-67.82	8.17	-56.73
5	5759.37 PK	62.66	88.2	-25.54	-44.11	-43.48	8.17	-32.6
6	5759.37 AV	56.87	68.2	-11.33	-50.42	-48.86	8.17	-38.39
7	8926.56 PK	60.14	88.2	-28.06	-45.79	-46.88	8.17	-35.12
8	8926.56 AV	43.35	68.2	-24.85	-60.91	-67.7	8.17	-51.91
9	13385.93 PK	60.28	74	-13.72	-47.1	-45.39	8.17	-34.98
10	13390.62 AV	42.5	54	-11.5	-67.46	-62.02	8.17	-52.76
11	20082.31 PK	51.43	74	-22.57	-54.81	-55.22	8.17	-43.83
12	20080.87 AV	41.33	54	-12.67	-65.07	-65.15	8.17	-53.93

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

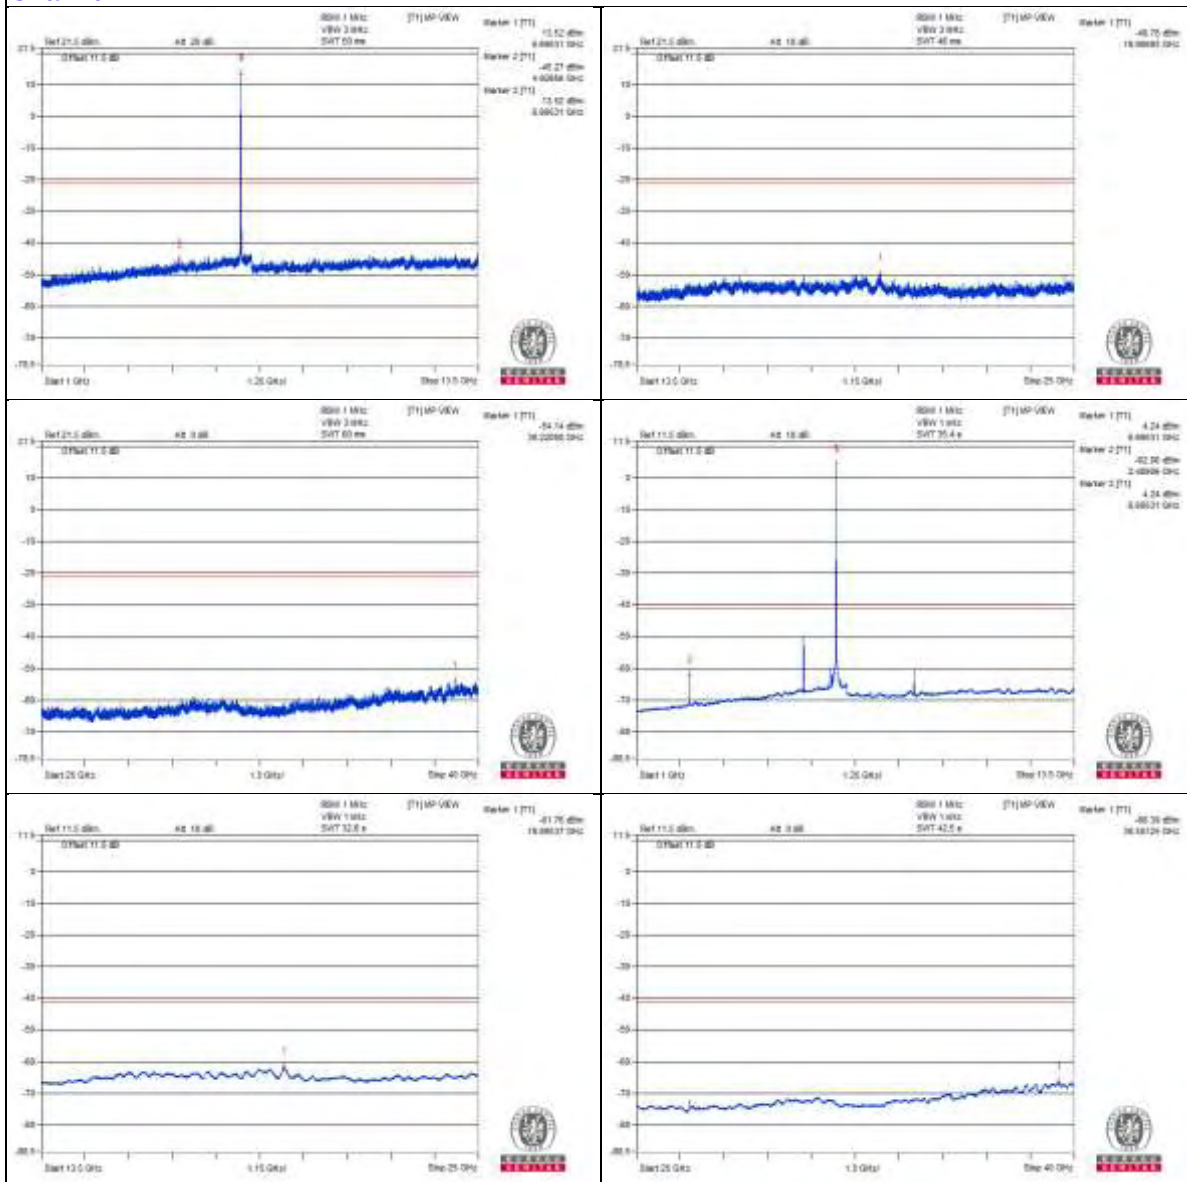

Chain 1

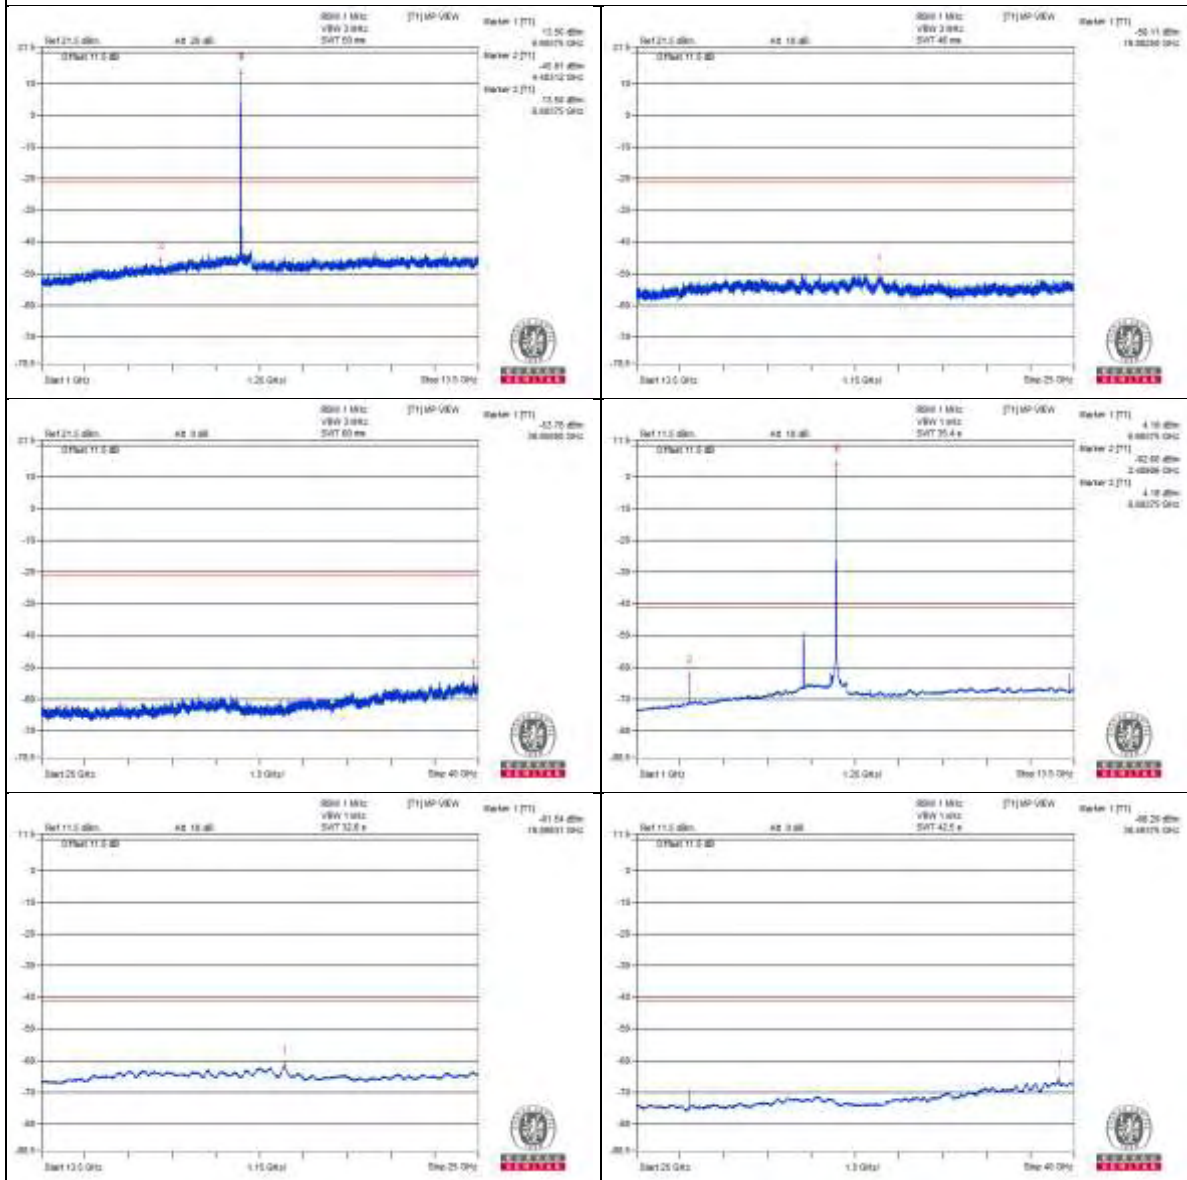

Channel 181

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	2650 PK	56.89	74	-17.11	-49.79	-49.33	8.17	-38.37
2	2653.12 AV	35.61	54	-18.39	-70.96	-70.71	8.17	-59.65
3	5484.37 PK	61.44	88.2	-26.76	-43.74	-46.78	8.17	-33.82
4	5484.37 AV	50.97	68.2	-17.23	-53.08	-61.24	8.17	-44.29
5	5759.37 PK	62.66	88.2	-25.54	-43.93	-43.63	8.17	-32.6
6	5759.37 AV	56.9	68.2	-11.3	-50.52	-48.74	8.17	-38.36
7	9137.5 PK	59.75	74	-14.25	-47.07	-46.35	8.17	-35.51
8	9142.18 AV	38.73	54	-15.27	-67.64	-67.78	8.17	-56.53
9	13712.75 PK	50.98	88.2	-37.22	-54.91	-56.1	8.17	-44.28
10	13708.43 AV	39.75	68.2	-28.45	-66.84	-66.55	8.17	-55.51
11	20569.62 PK	51.58	74	-22.42	-54.4	-55.37	8.17	-43.68
12	20569.62 AV	41	54	-13	-65.49	-65.4	8.17	-54.26

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

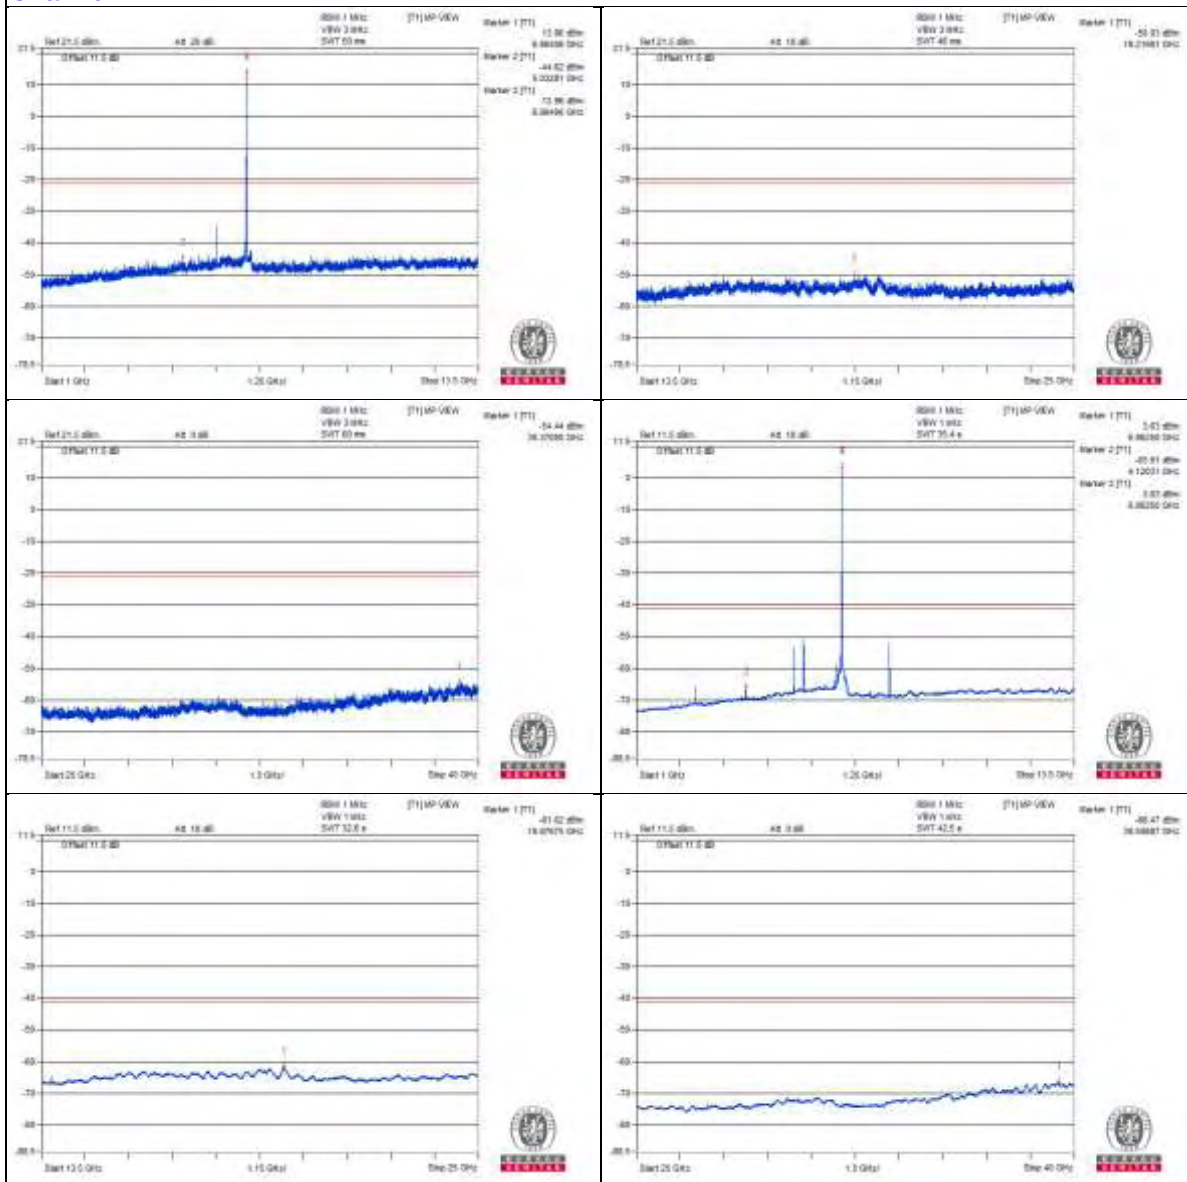

Chain 1

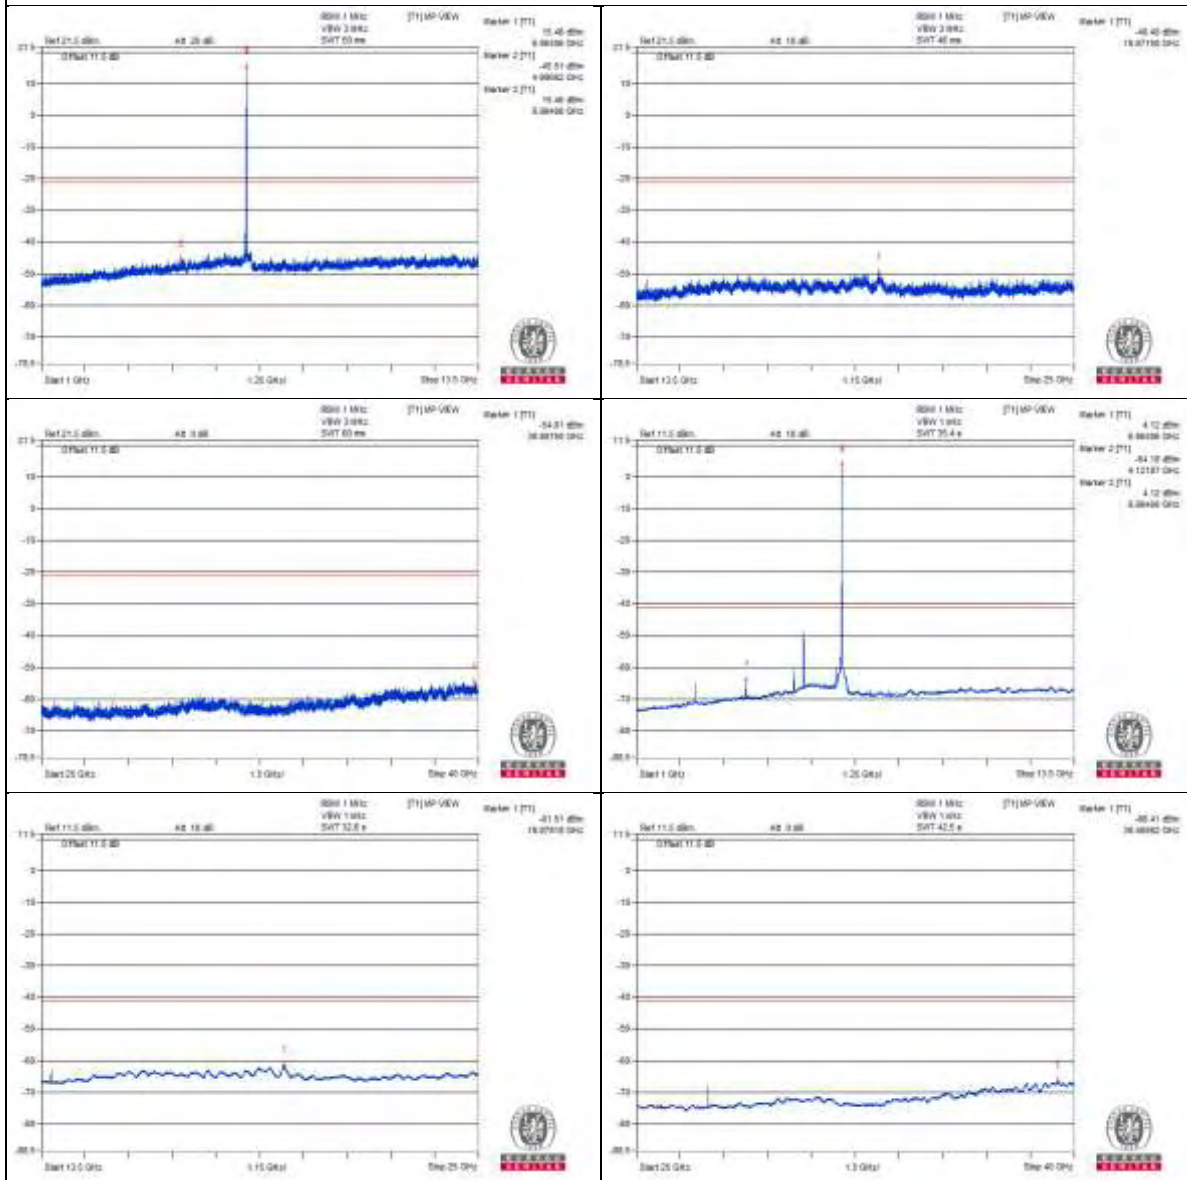

Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	7184.6 PK	60.22	88.2	-27.98	-47.55	-45.21	8.17	-35.04
2	7206.3 AV	47.05	68.2	-21.15	-59.37	-59.42	8.17	-48.21


Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8


d = measurement distance in 3 meters.

* The unwanted emission was verified and the test result was passed by radiated measurement.

Chain 0

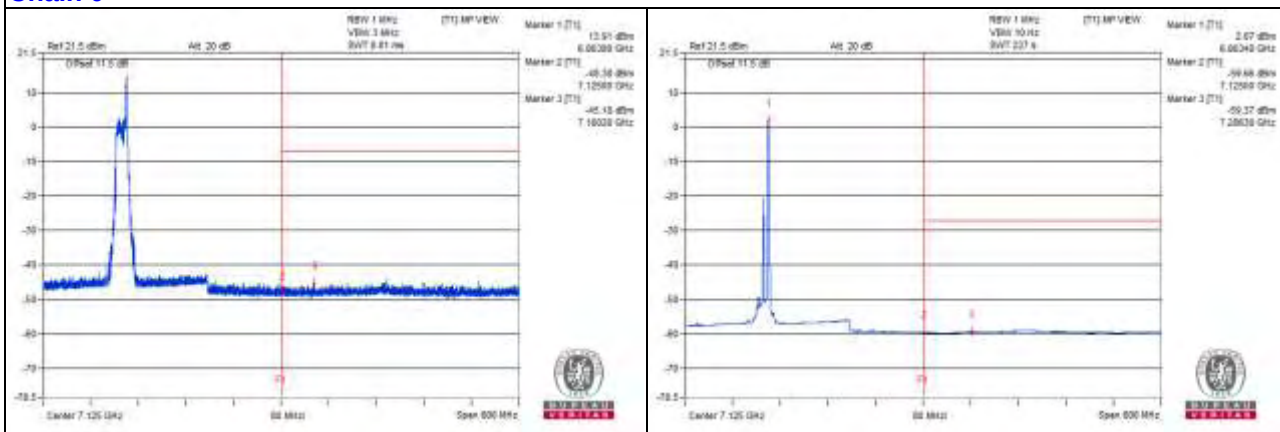

Chain 1

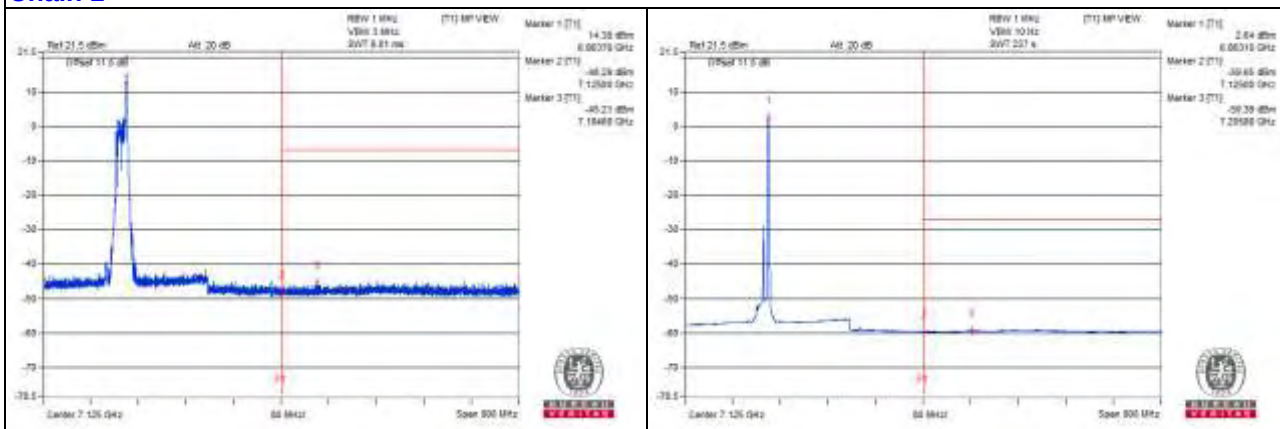

RU52

Channel 2

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	1731.25 PK	55.12	74	-18.88	-51.37	-51.27	8.17	-40.14
2	1725 AV	33.65	54	-20.35	-72.71	-72.88	8.17	-61.61
3	5479.68 PK	59.03	88.2	-29.17	-47.77	-47.08	8.17	-36.23
4	5479.68 AV	38.04	68.2	-30.16	-68.57	-68.24	8.17	-57.22
5	5756.25 PK	59.05	88.2	-29.15	-46.16	-49.11	8.17	-36.21
6	5759.37 AV	40.76	68.2	-27.44	-68.31	-64.05	8.17	-54.5
7	7917.18 PK	59.07	88.2	-29.13	-47.07	-47.69	8.17	-36.19
8	7912.5 AV	41.51	68.2	-26.69	-65.45	-64.47	8.17	-53.75
9	11868.75 PK	60.76	74	-13.24	-46.1	-45.29	8.17	-34.5
10	11875 AV	38.94	54	-15.06	-67.43	-67.58	8.17	-56.32
11	17808.18 PK	52.9	74	-21.1	-52.97	-54.2	8.17	-42.36
12	17809.62 AV	42.3	54	-11.7	-64.22	-64.07	8.17	-52.96

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

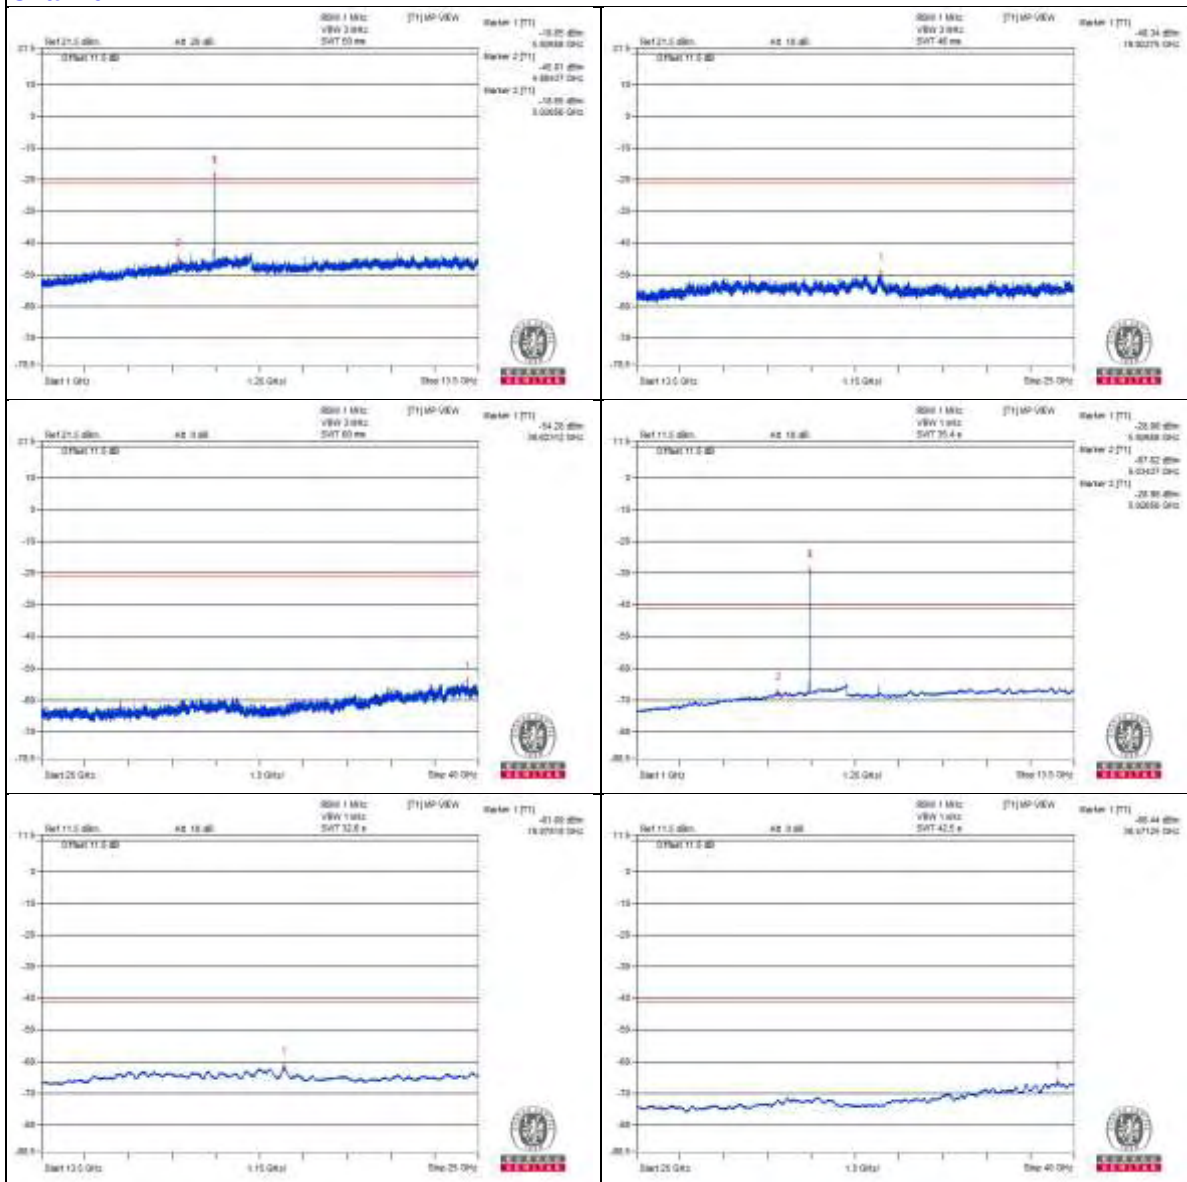

Chain 1

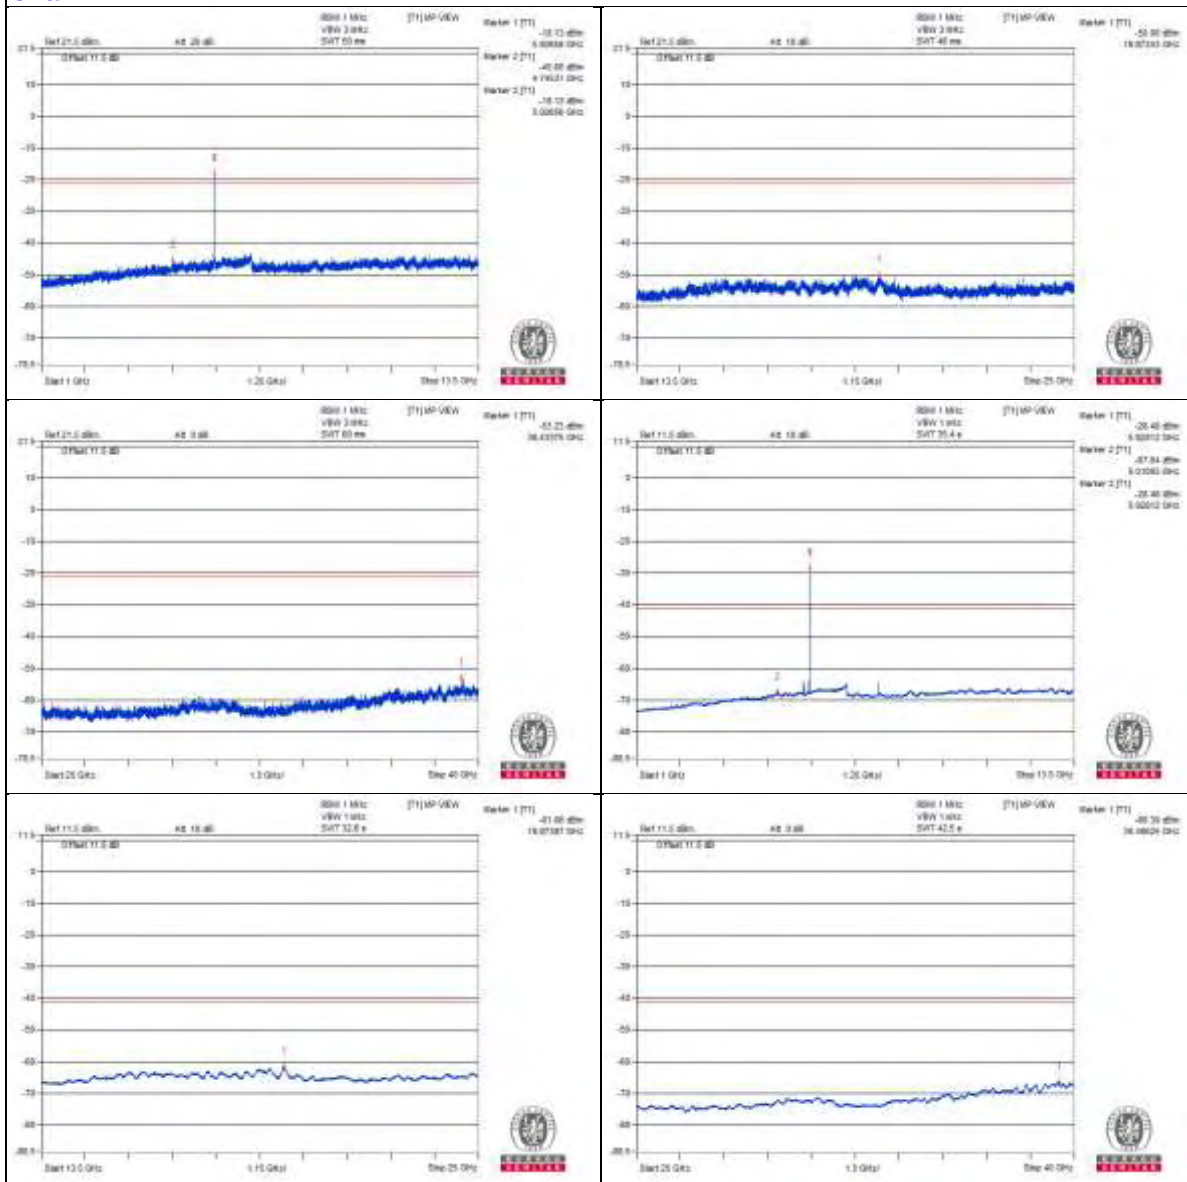

Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5924.95 PK	84.27	88.2	-3.93	-22.44	-21.88	8.15	-10.99
2	5925 AV	71.47	68.2	*3.27	-35.26	-34.66	8.15	-23.79


Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8


d = measurement distance in 3 meters.

* The unwanted emission was verified and the test result was passed by radiated measurement.
(Please refer APPENDIX B)

Chain 0

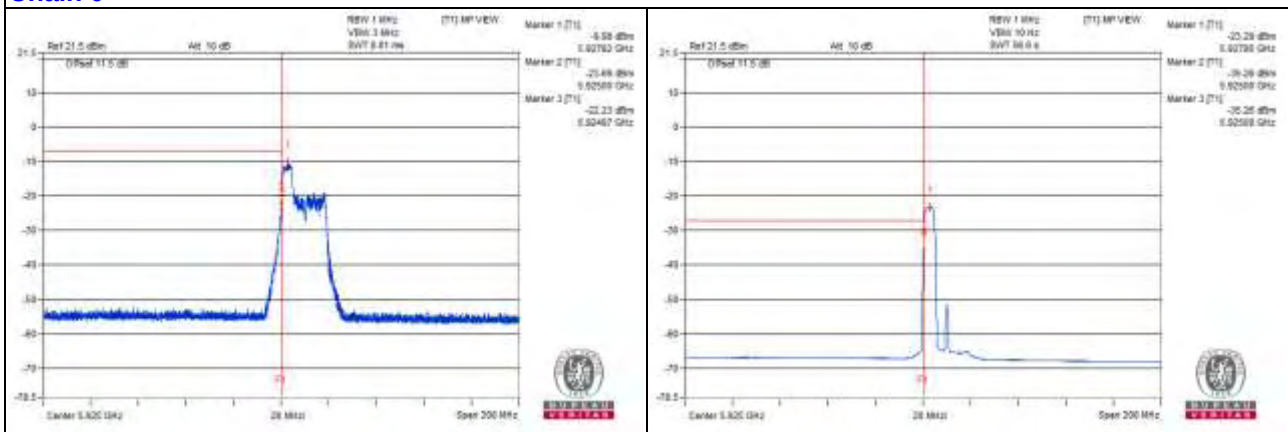

Chain 1

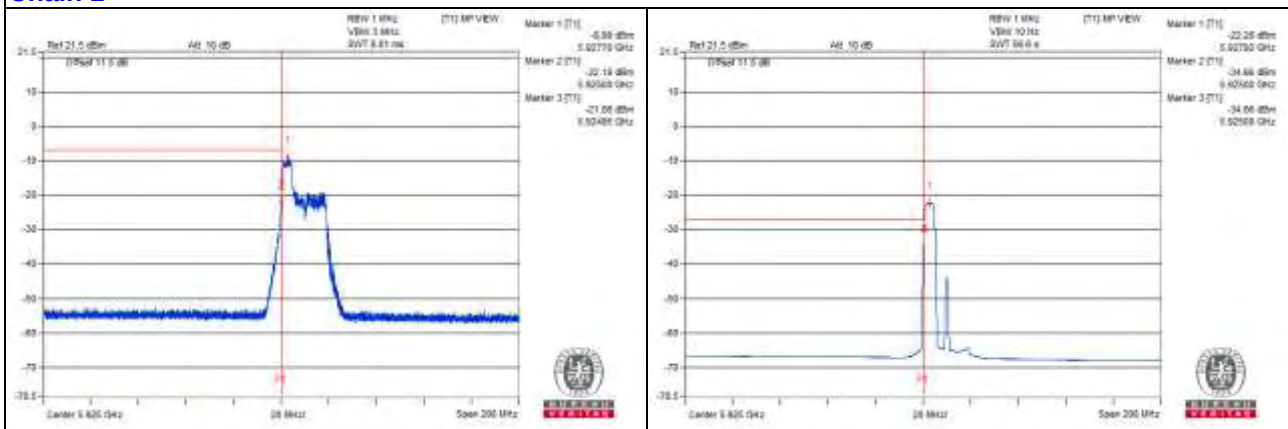

Channel 1

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	1753.12 PK	54.98	74	-19.02	-51.8	-51.15	8.17	-40.28
2	1746.87 AV	34.45	54	-19.55	-72.19	-71.8	8.17	-60.81
3	5484.37 PK	59.9	88.2	-28.3	-46.39	-46.7	8.17	-35.36
4	5485.93 AV	39	68.2	-29.2	-67.26	-67.63	8.17	-56.26
5	5759.37 PK	62.41	88.2	-25.79	-44.19	-43.88	8.17	-32.85
6	5759.37 AV	56.81	68.2	-11.39	-50.42	-48.96	8.17	-38.45
7	7937.5 PK	59.73	88.2	-28.47	-45.92	-47.68	8.17	-35.53
8	7940.62 AV	45.84	68.2	-22.36	-59.03	-63.1	8.17	-49.42
9	11909.37 PK	60.56	74	-13.44	-45.81	-45.95	8.17	-34.7
10	11910.93 AV	38.94	54	-15.06	-67.5	-67.51	8.17	-56.32
11	17864.25 PK	54.23	74	-19.77	-52.62	-51.84	8.17	-41.03
12	17867.12 AV	43.09	54	-10.91	-63.43	-63.28	8.17	-52.17

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

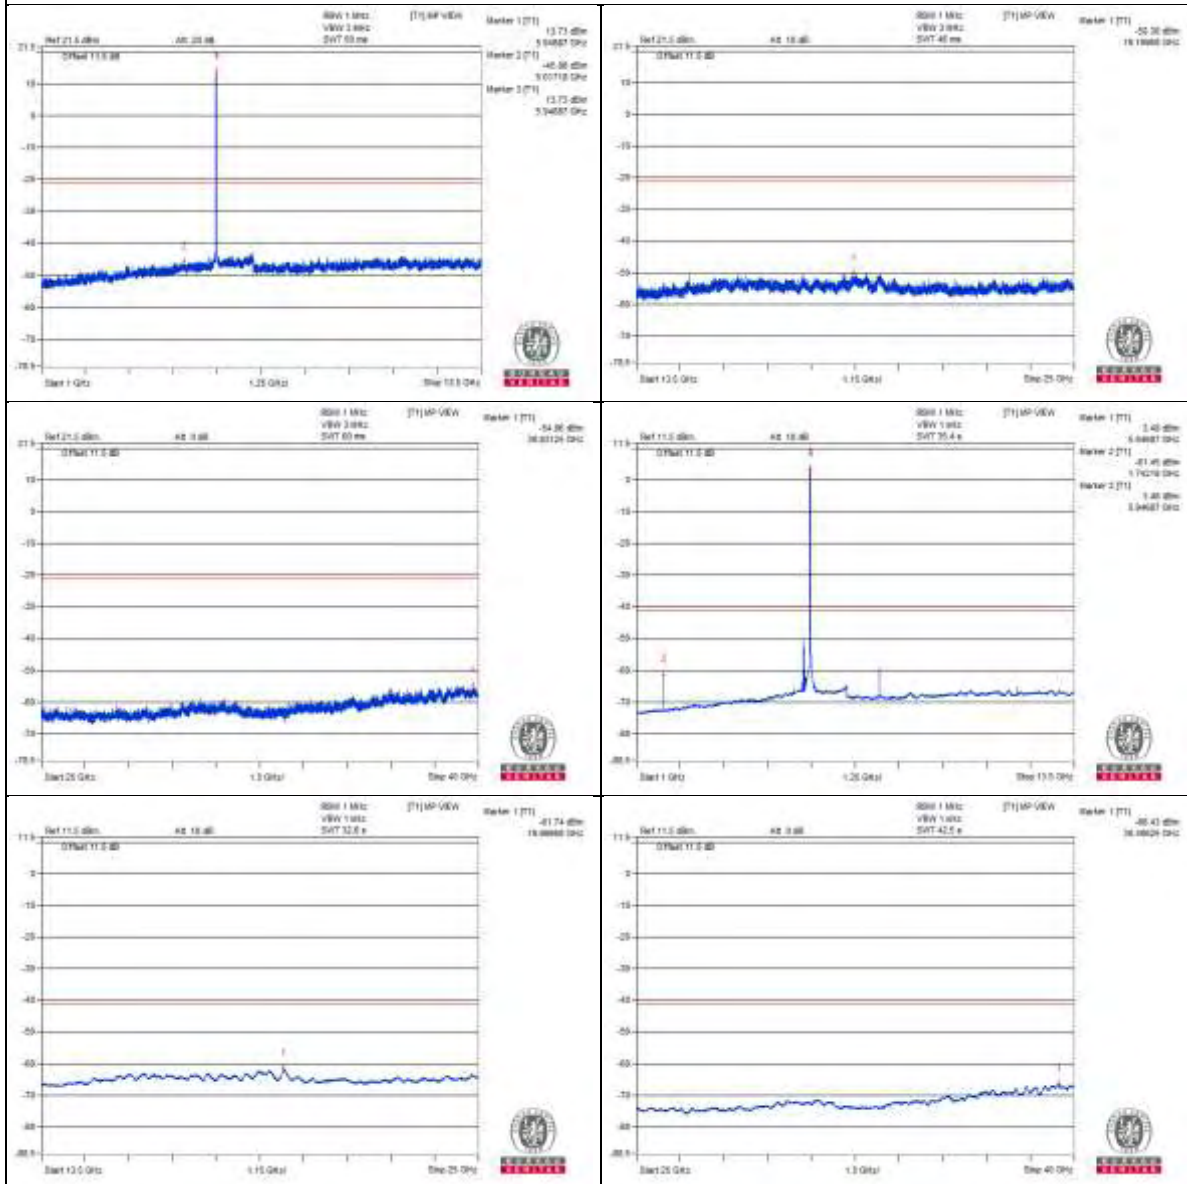

Chain 1

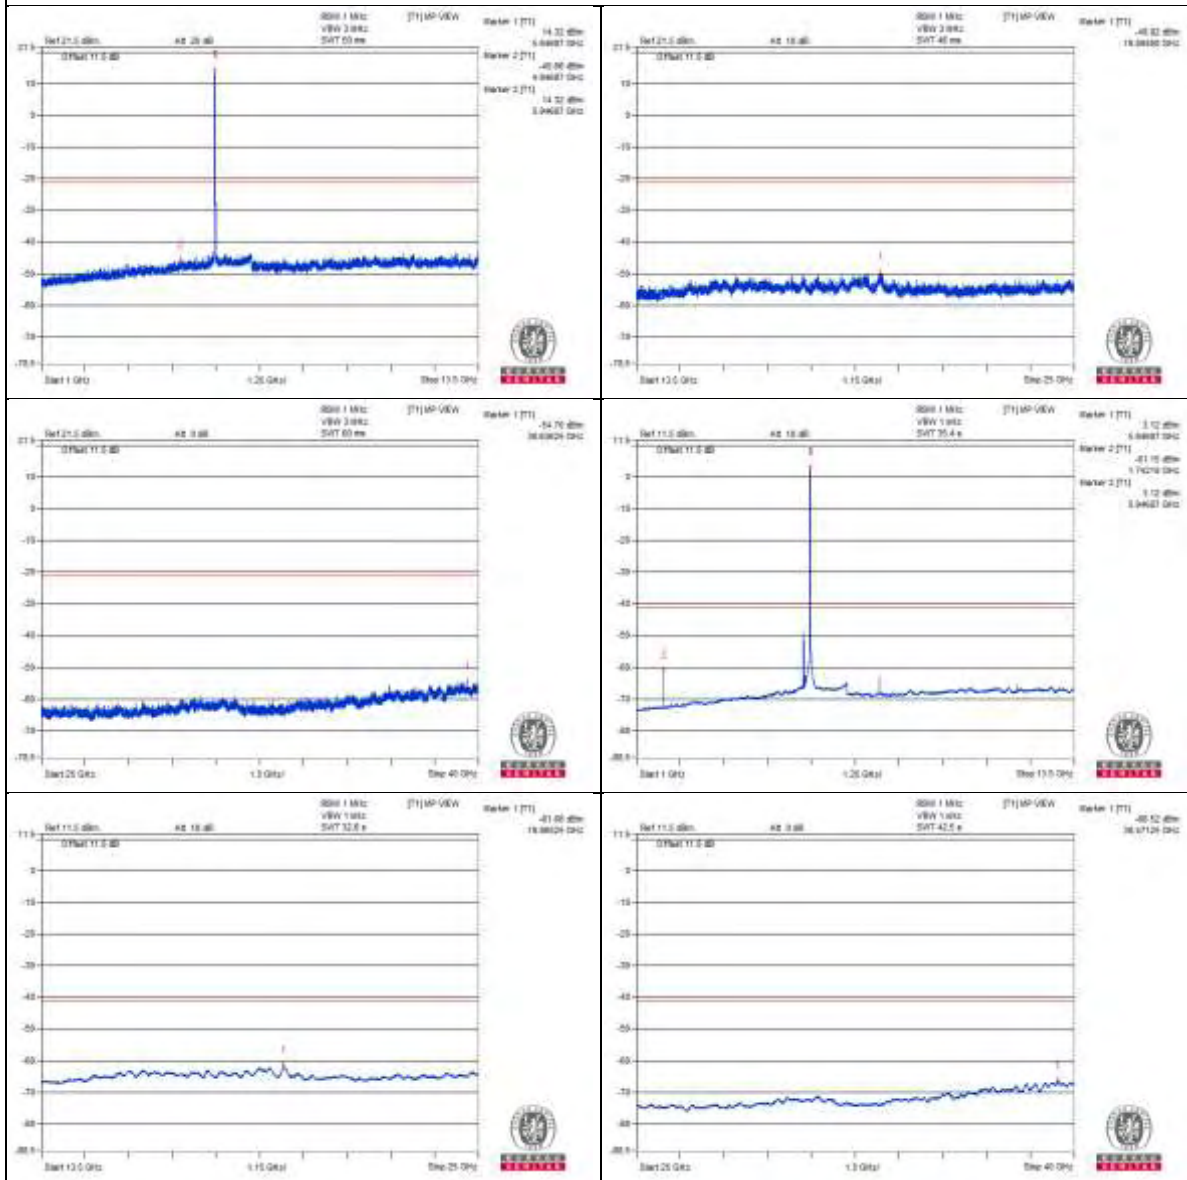

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5877.3 PK	72.25	88.2	-15.95	-35.57	-33.11	8.15	-23.01
2	5915.3 AV	58.26	68.2	-9.94	-48.19	-48.14	8.15	-37

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

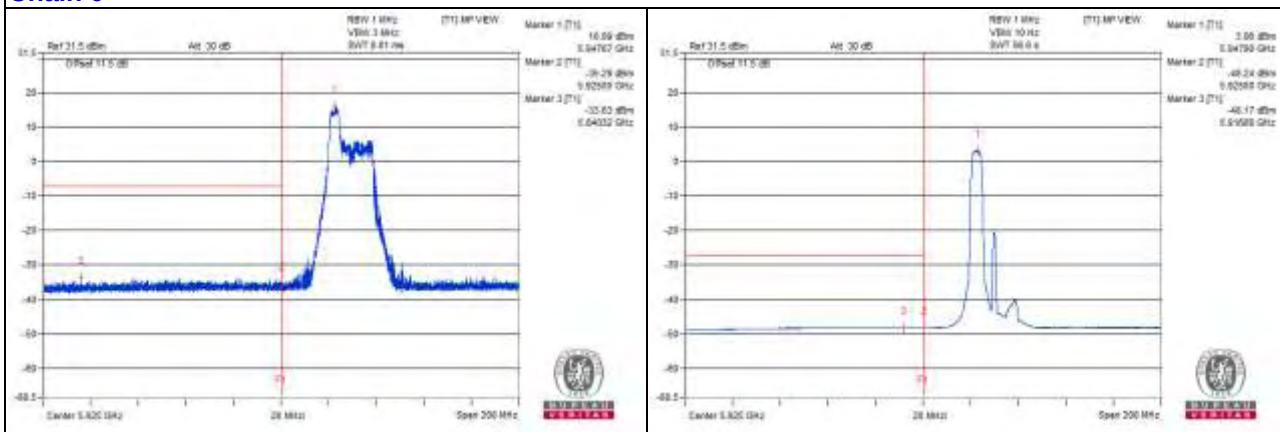

Chain 1

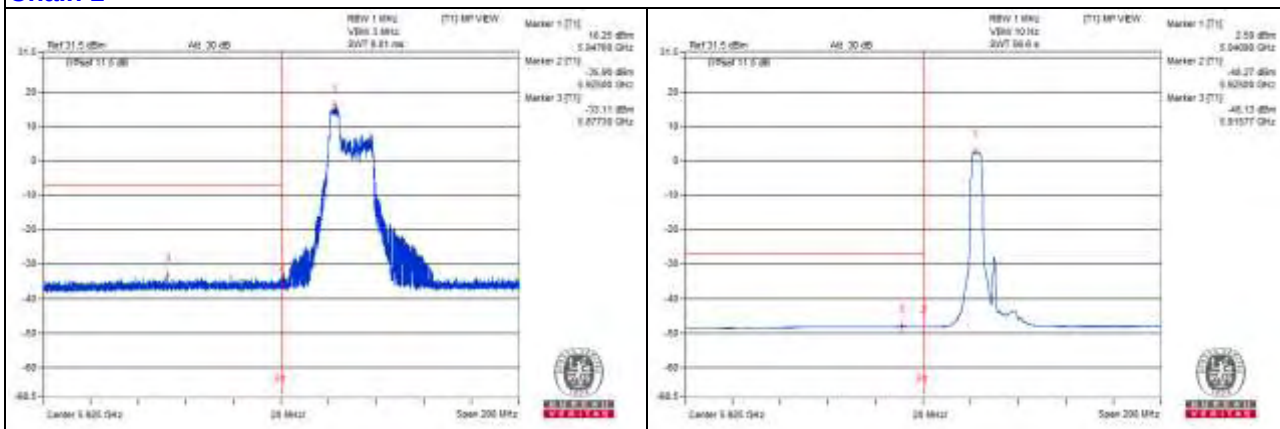

Channel 45

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	1973.43 PK	55.8	74	-18.2	-49.4	-52.39	8.17	-39.46
2	1965.62 AV	44.85	54	-9.15	-61.03	-62.24	8.17	-50.41
3	5481.25 PK	59.15	88.2	-29.05	-47.33	-47.25	8.17	-36.11
4	5487.5 AV	39.52	68.2	-28.68	-66.56	-67.32	8.17	-55.74
5	5759.37 PK	63.35	88.2	-24.85	-43.05	-43.13	8.17	-31.91
6	5759.37 AV	58.39	68.2	-9.81	-47.61	-48.55	8.17	-36.87
7	8235.93 PK	58.51	74	-15.49	-47.24	-48.75	8.17	-36.75
8	8232.81 AV	45.39	54	-8.61	-60.67	-61.47	8.17	-49.87
9	12346.87 PK	60.17	74	-13.83	-46.24	-46.31	8.17	-35.09
10	12345.31 AV	42.21	54	-11.79	-62.97	-66.02	8.17	-53.05
11	18521.18 PK	52.75	74	-21.25	-54.05	-53.35	8.17	-42.51
12	18529.81 AV	41.92	54	-12.08	-64.45	-64.59	8.17	-53.34

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

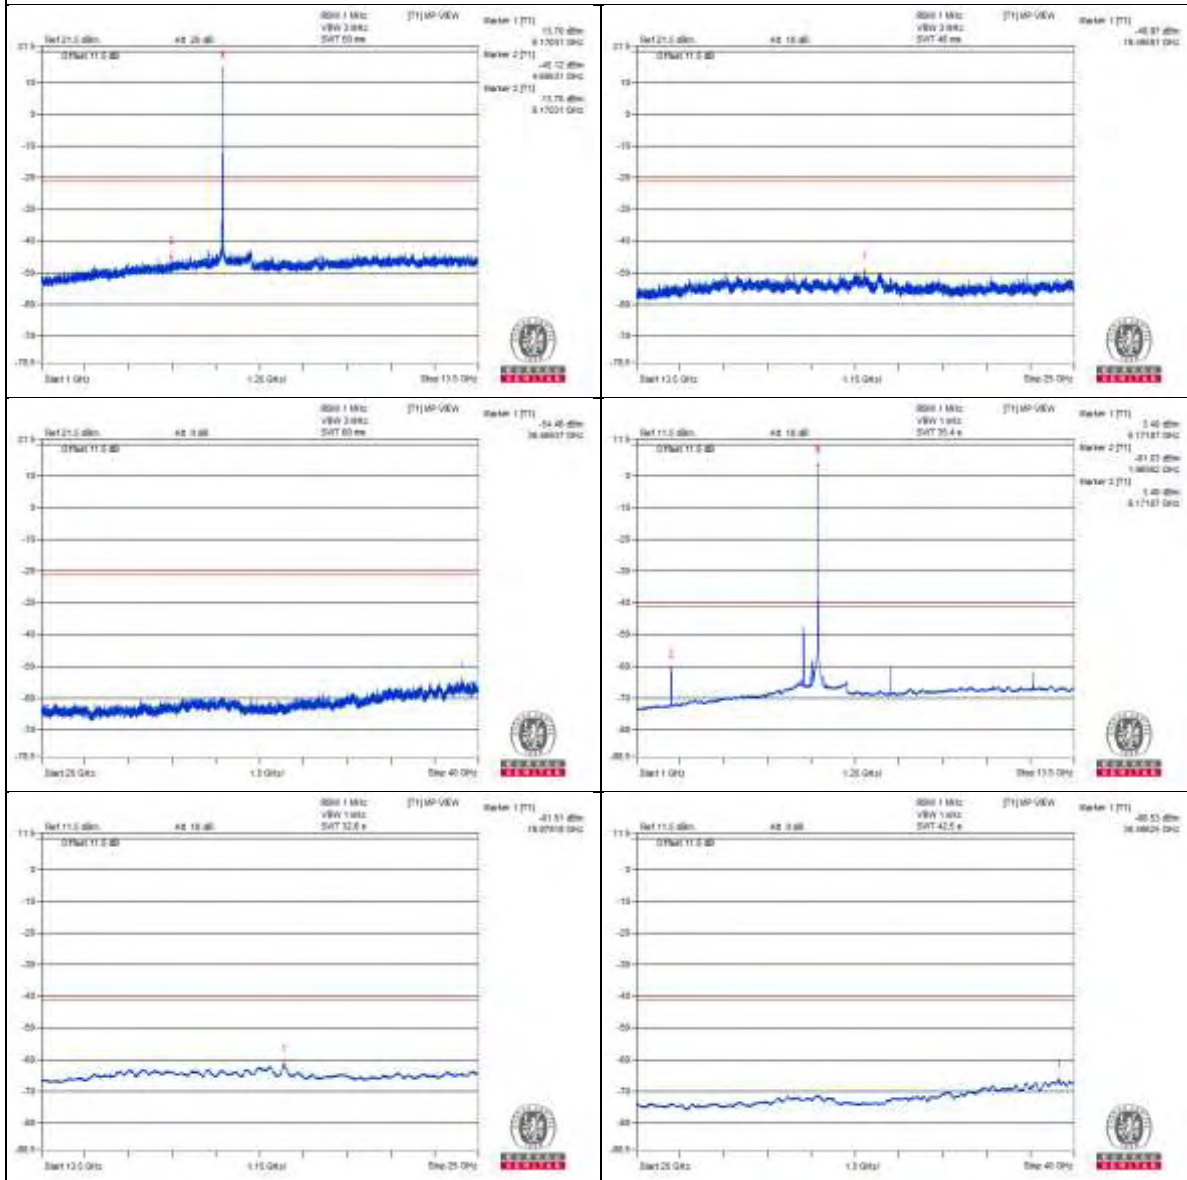

Chain 1

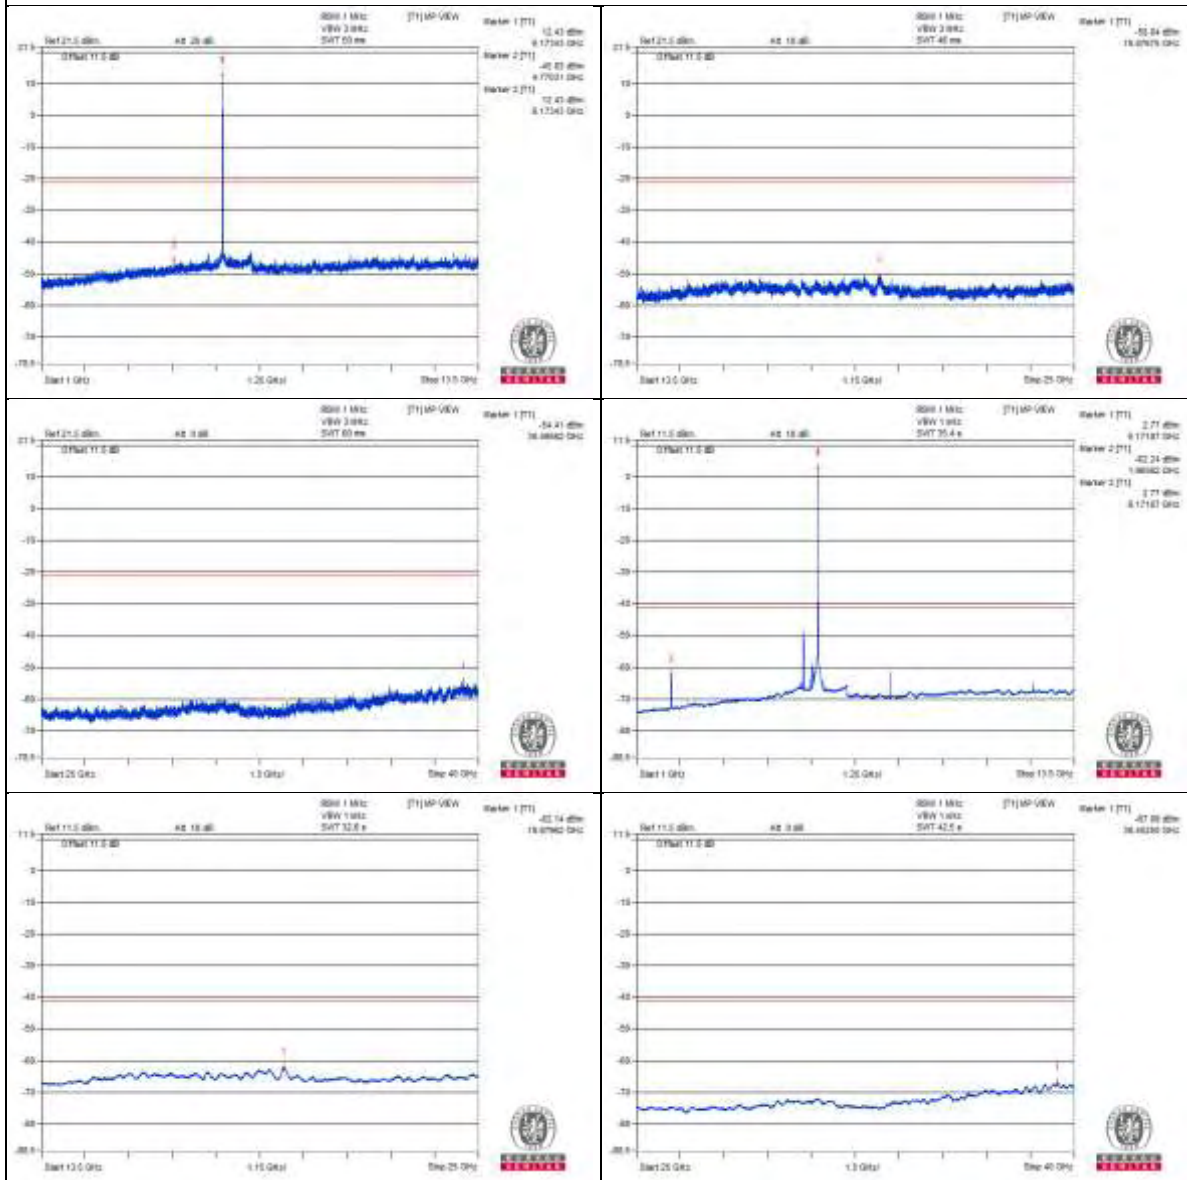

Channel 93

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	2210.93 PK	55.18	74	-18.82	-51.09	-51.43	8.17	-40.08
2	2214.06 AV	35.91	54	-18.09	-70.22	-70.87	8.17	-59.35
3	5479.68 PK	59.35	88.2	-28.85	-46.56	-47.69	8.17	-35.91
4	5487.5 AV	38.55	68.2	-29.65	-67.59	-68.21	8.17	-56.71
5	5759.37 PK	60.58	88.2	-27.62	-44.84	-47.2	8.17	-34.68
6	5759.37 AV	51.72	68.2	-16.48	-54.29	-55.19	8.17	-43.54
7	8553.12 PK	59.23	88.2	-28.97	-46.86	-47.6	8.17	-36.03
8	8553.12 AV	48.25	68.2	-19.95	-57.51	-59	8.17	-47.01
9	12832.81 PK	60.97	88.2	-27.23	-44.45	-46.82	8.17	-34.29
10	12829.68 AV	39.57	68.2	-28.63	-66.65	-67.11	8.17	-55.69
11	19248.56 PK	55.86	74	-18.14	-49.59	-51.87	8.17	-39.4
12	19248.56 AV	43.63	54	-10.37	-62.53	-63.1	8.17	-51.63

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

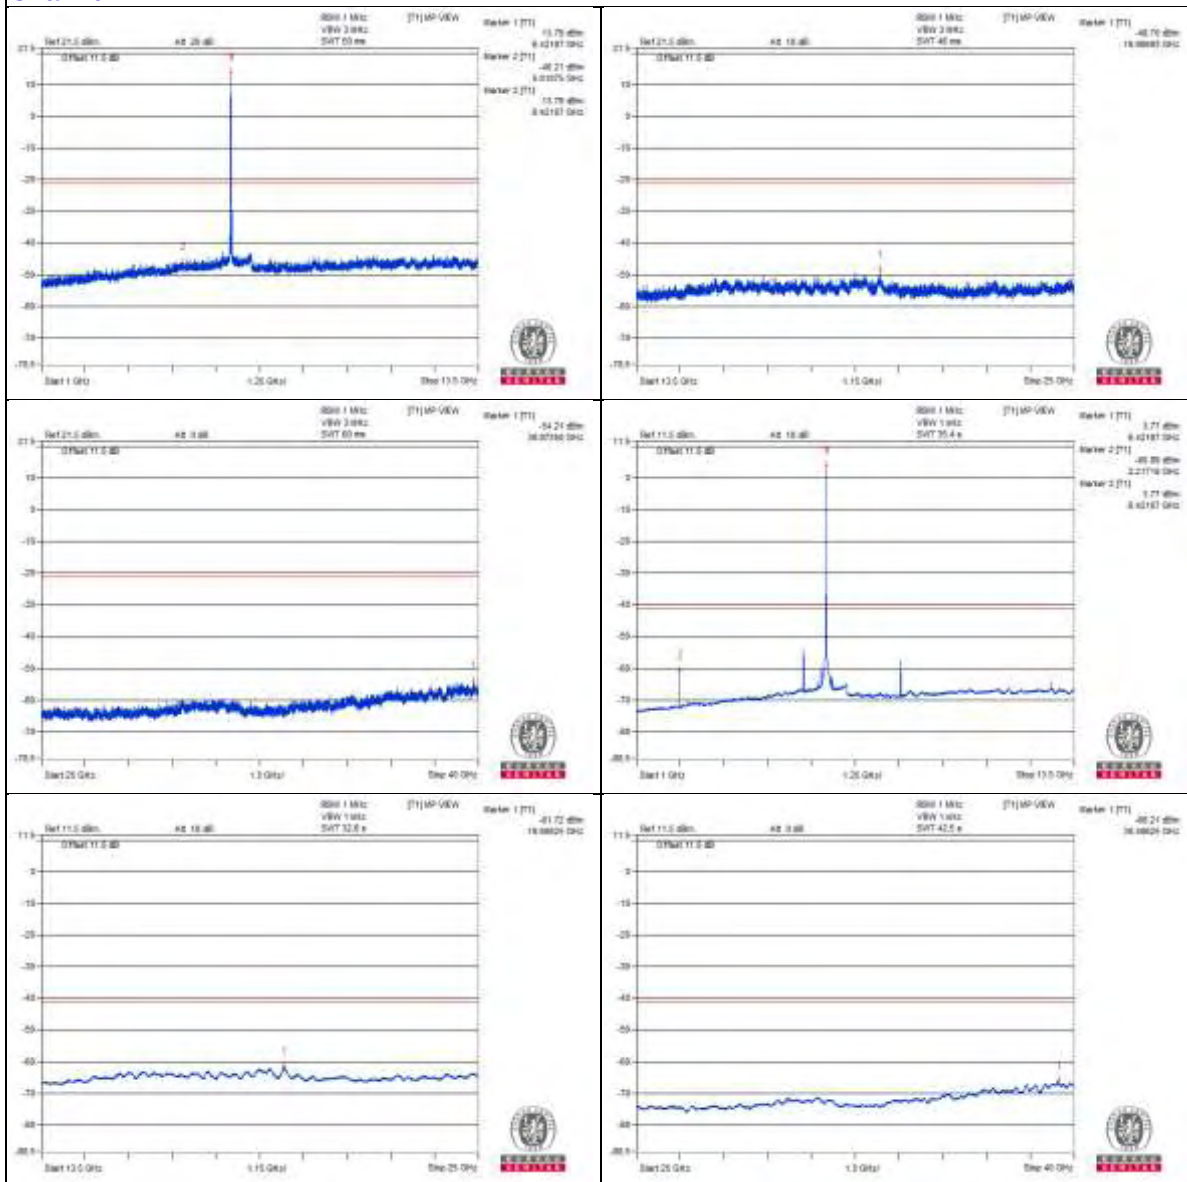

Chain 1

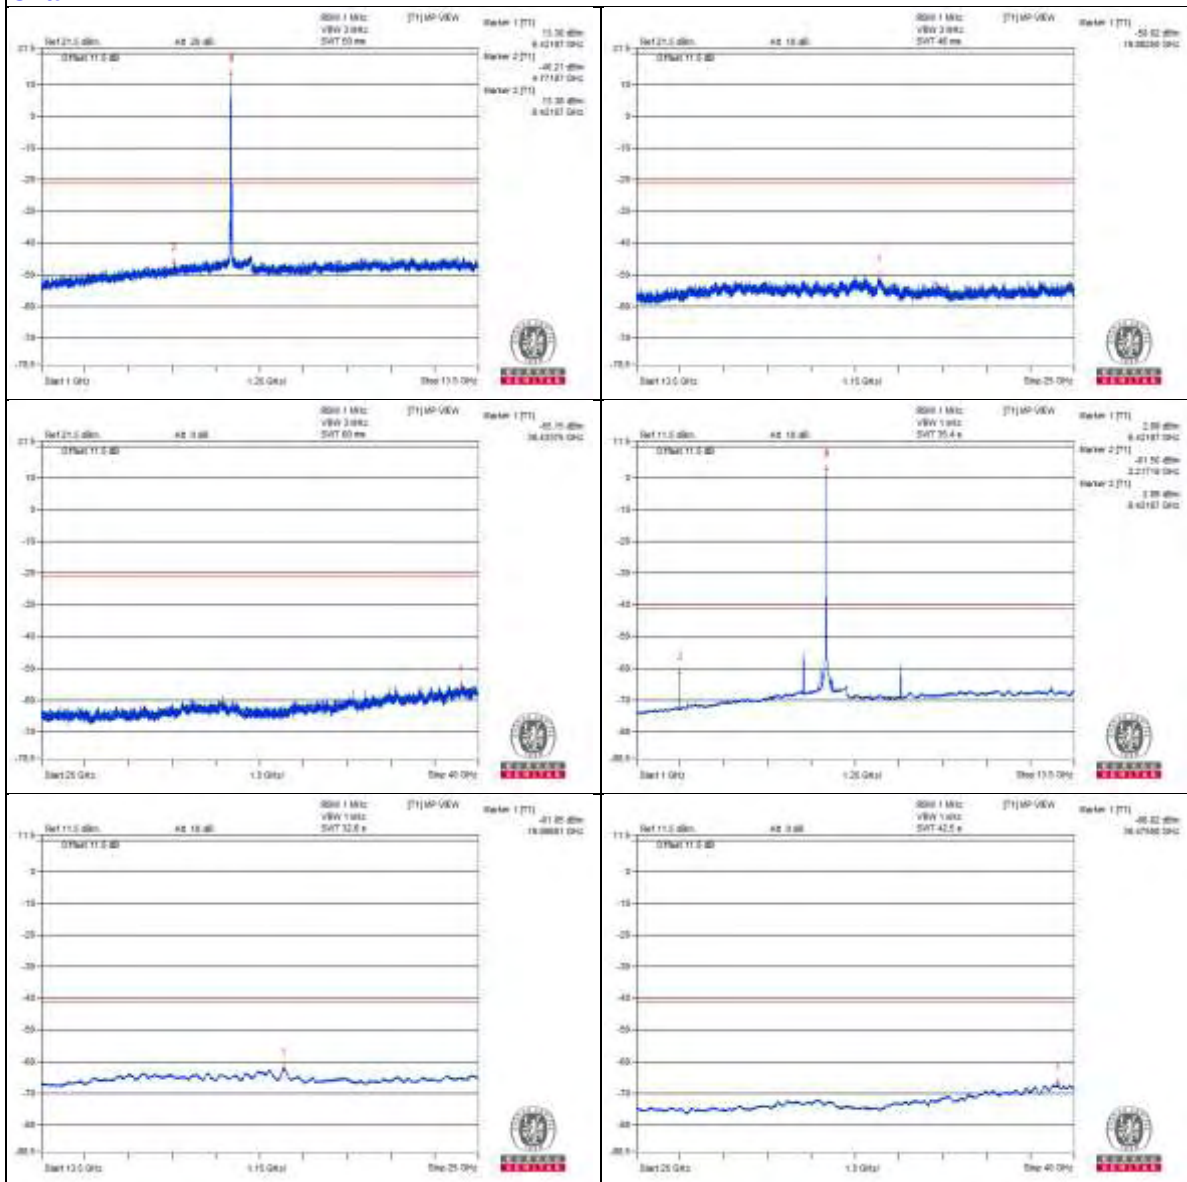

Channel 117

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	2328.12 PK	55.54	74	-18.46	-51.63	-50.27	8.17	-39.72
2	2325 AV	34.76	54	-19.24	-71.66	-71.7	8.17	-60.5
3	5487.5 PK	59.33	88.2	-28.87	-47.21	-47.02	8.17	-35.93
4	5485.93 AV	38.57	68.2	-29.63	-67.47	-68.32	8.17	-56.69
5	5759.37 PK	61.09	88.2	-27.11	-44.24	-46.84	8.17	-34.17
6	5759.37 AV	52.8	68.2	-15.4	-53.21	-54.11	8.17	-42.46
7	8714.06 PK	60.05	88.2	-28.15	-46.74	-46.07	8.17	-35.21
8	8714.06 AV	48.93	68.2	-19.27	-56.92	-58.2	8.17	-46.33
9	13067.18 PK	60.36	88.2	-27.84	-46	-46.17	8.17	-34.9
10	13075 AV	39.11	68.2	-29.09	-67.06	-67.61	8.17	-56.15
11	19603.62 PK	52.52	74	-21.48	-53.09	-54.94	8.17	-42.74
12	19603.62 AV	42.18	54	-11.82	-63.97	-64.57	8.17	-53.08

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

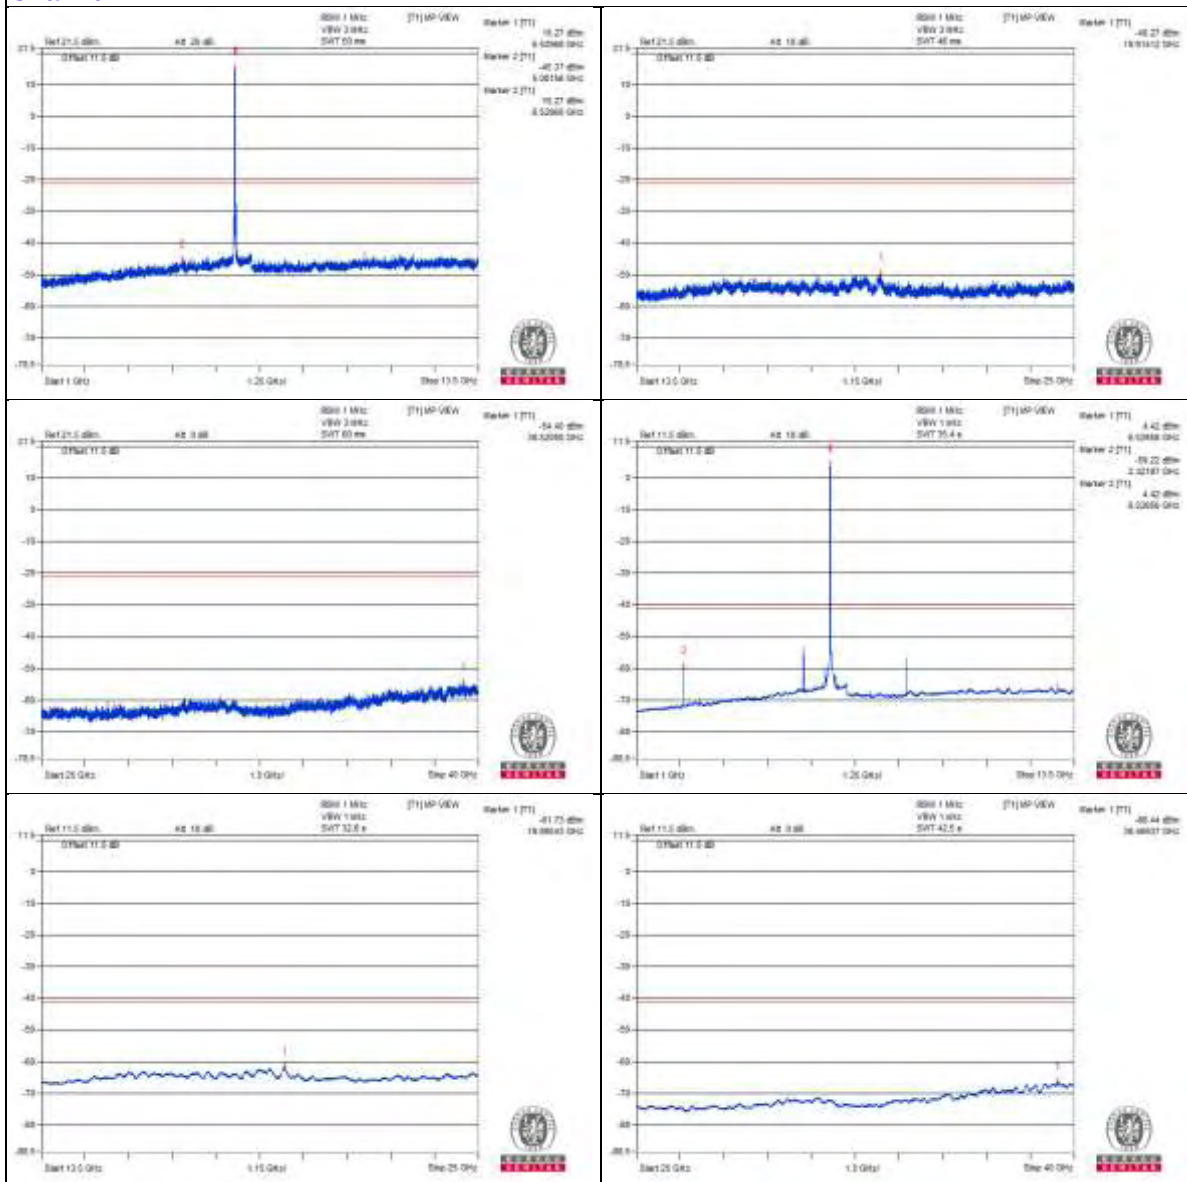

Chain 1

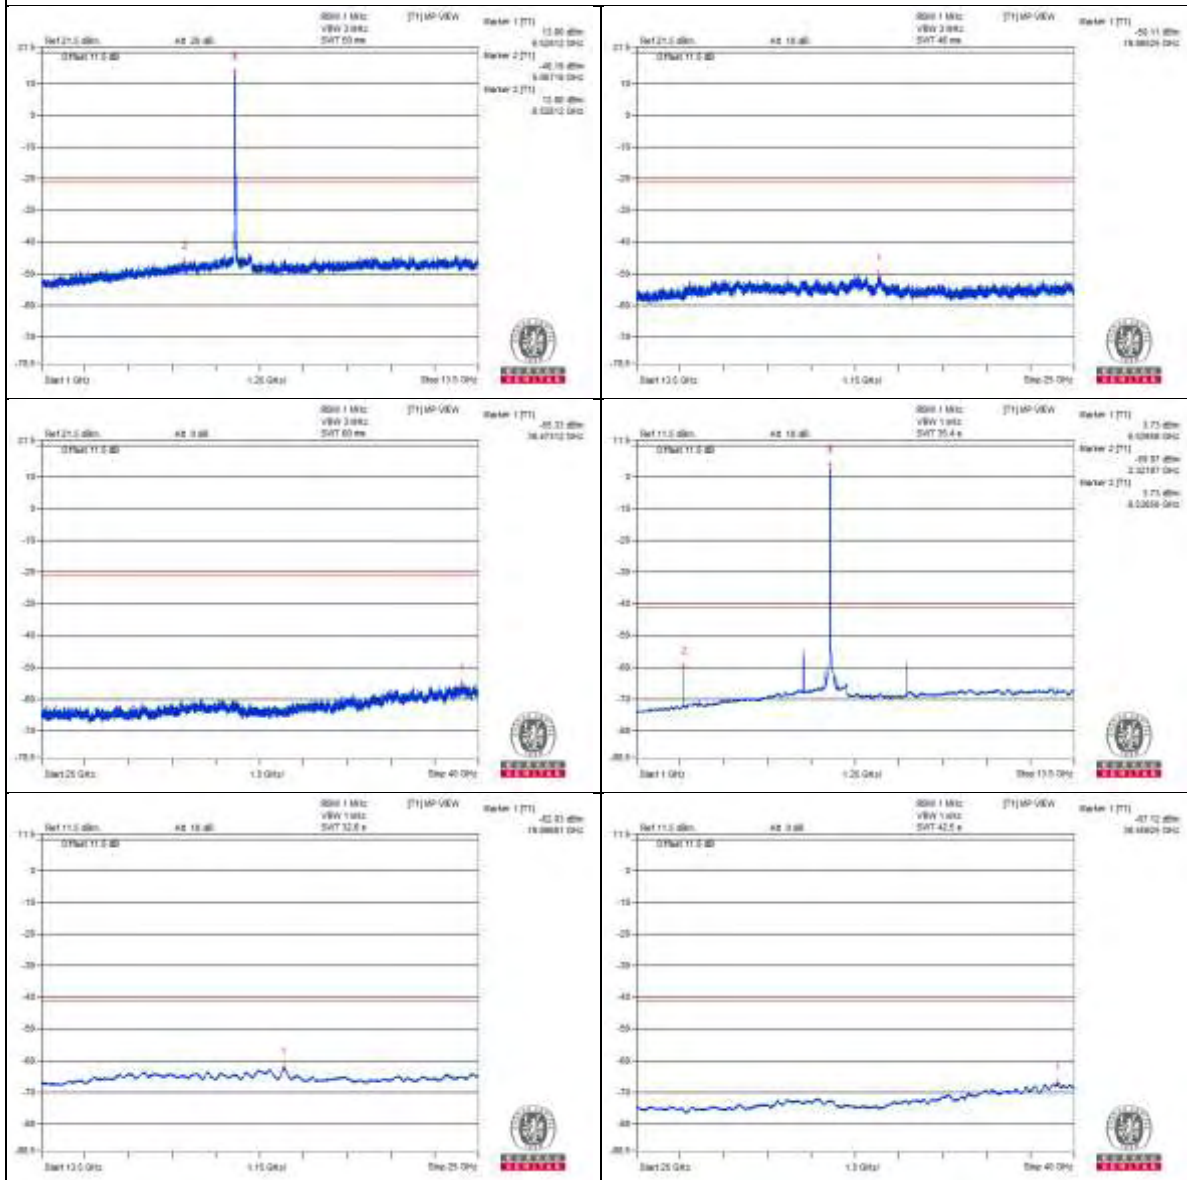

Channel 149

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	2485.93 PK	56.31	74	-17.69	-49.35	-51.07	8.17	-38.95
2	2485.93 AV	44.67	54	-9.33	-61.59	-61.95	8.17	-50.59
3	5487.5 PK	58.7	88.2	-29.5	-46.81	-48.93	8.17	-36.56
4	5487.5 AV	38.82	68.2	-29.38	-67.28	-67.99	8.17	-56.44
5	5759.37 PK	61.05	88.2	-27.15	-45.46	-45.32	8.17	-34.21
6	5759.37 AV	55.05	68.2	-13.15	-50.94	-51.9	8.17	-40.21
7	8923.43 PK	58.97	88.2	-29.23	-46.75	-48.33	8.17	-36.29
8	8926.56 AV	45.32	68.2	-22.88	-60.5	-61.84	8.17	-49.94
9	13390.62 PK	60.47	74	-13.53	-45.04	-47.15	8.17	-34.79
10	13385.93 AV	38.62	54	-15.38	-67.45	-68.23	8.17	-56.64
11	20086.62 PK	51.24	74	-22.76	-54.79	-55.65	8.17	-44.02
12	20080.87 AV	41	54	-13	-65.26	-65.62	8.17	-54.26

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

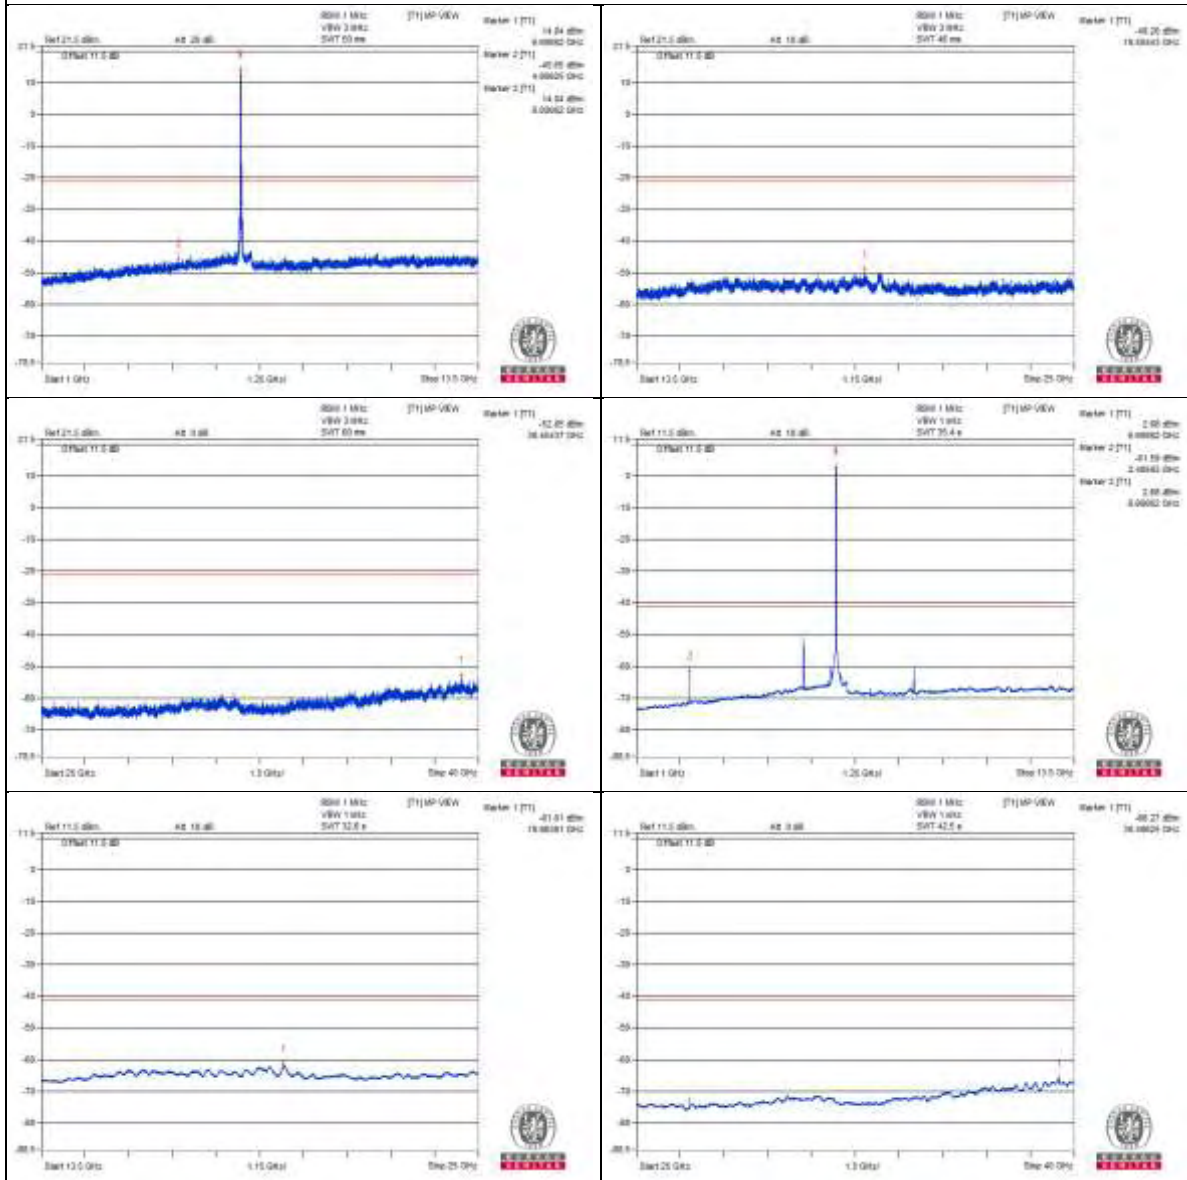

Chain 1

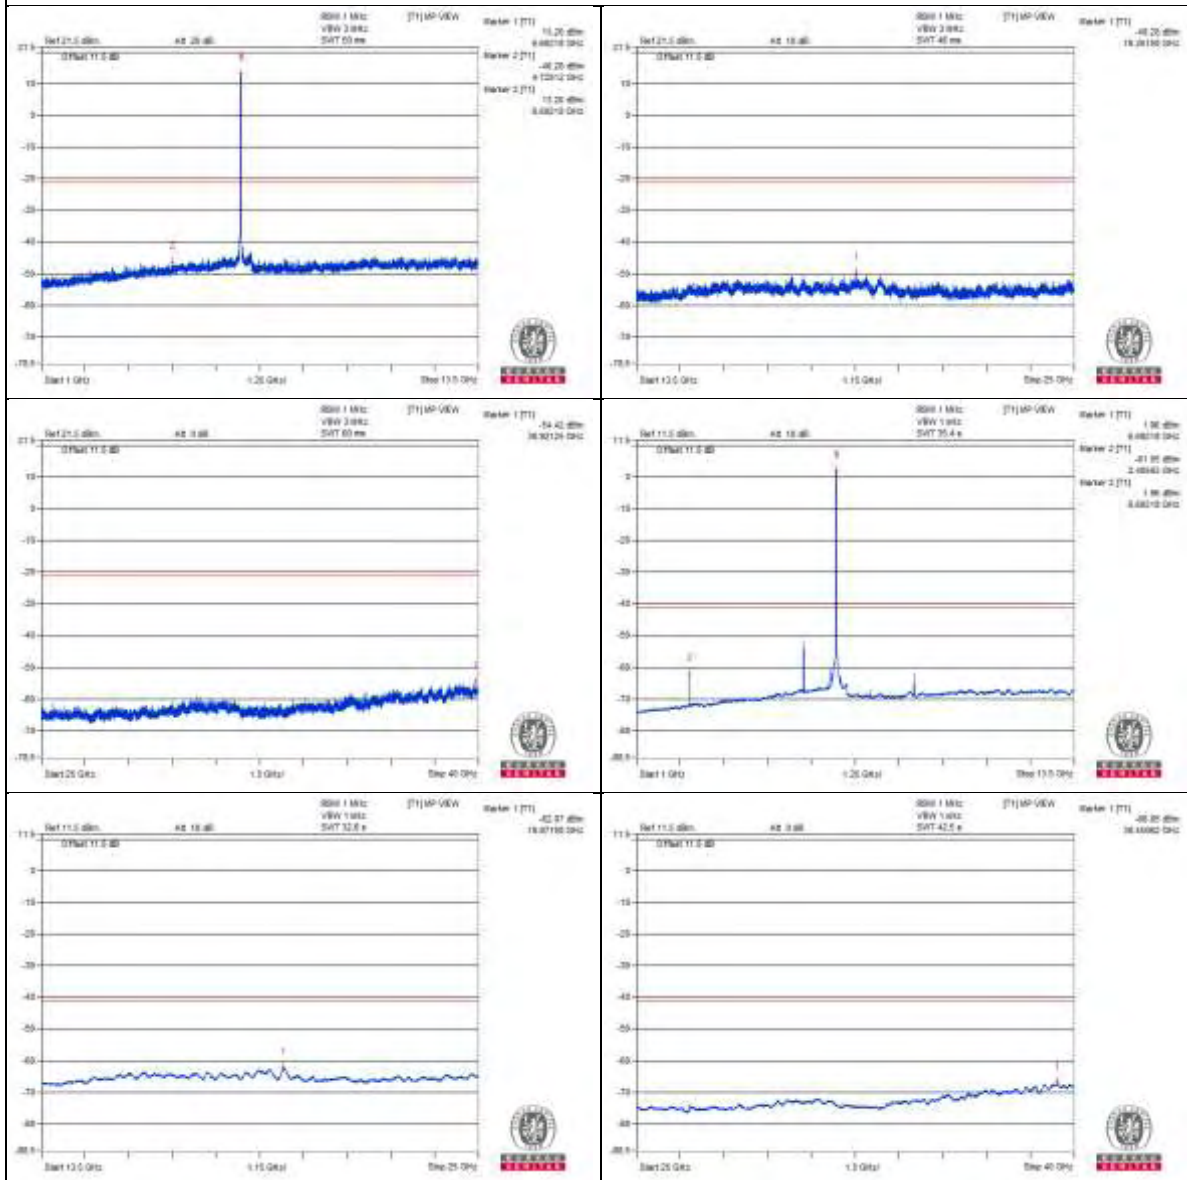

Channel 181

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	2654.68 PK	57.03	74	-16.97	-49.33	-49.49	8.17	-38.23
2	2654.68 AV	38.41	54	-15.59	-67.39	-68.78	8.17	-56.85
3	5484.37 PK	64.66	88.2	-23.54	-41.05	-42.66	8.17	-30.6
4	5484.37 AV	57.53	68.2	-10.67	-48.6	-49.25	8.17	-37.73
5	5759.37 PK	61.9	88.2	-26.3	-43.89	-45.3	8.17	-33.36
6	5759.37 AV	55.06	68.2	-13.14	-50.92	-51.89	8.17	-40.2
7	9142.18 PK	59.4	74	-14.6	-47.15	-46.94	8.17	-35.86
8	9142.18 AV	38.54	54	-15.46	-67.71	-68.09	8.17	-56.72
9	13709.87 PK	49.54	88.2	-38.66	-55.8	-58.39	8.17	-45.72
10	13708.43 AV	39.4	68.2	-28.8	-66.56	-67.59	8.17	-55.86
11	20569.62 PK	51.27	74	-22.73	-55	-55.35	8.17	-43.99
12	20569.62 AV	40.81	54	-13.19	-65.29	-65.99	8.17	-54.45

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

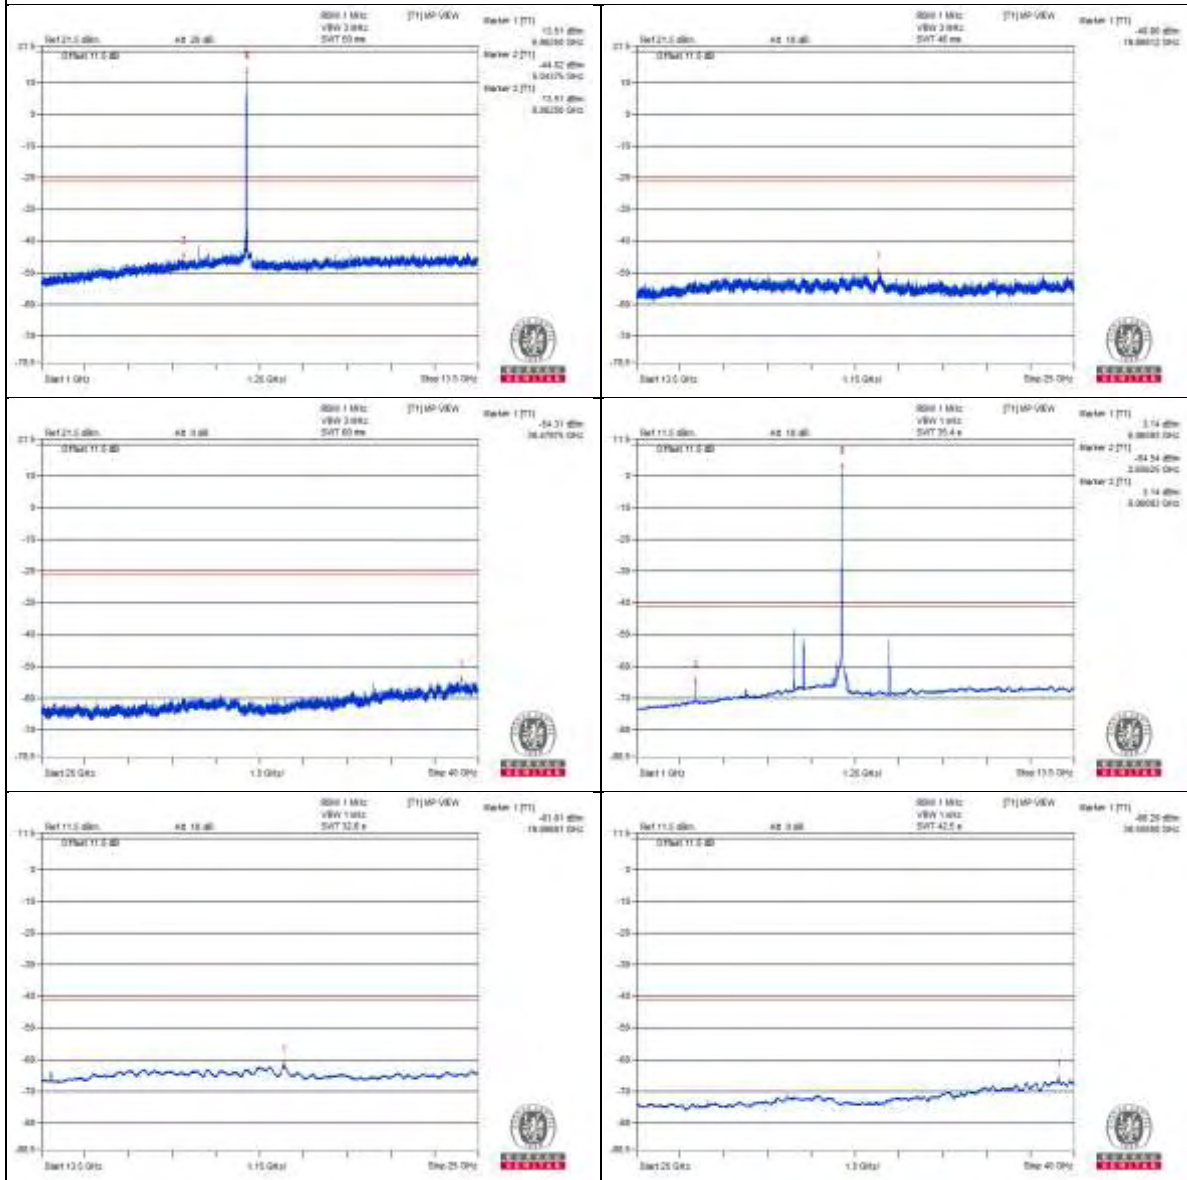

Chain 1

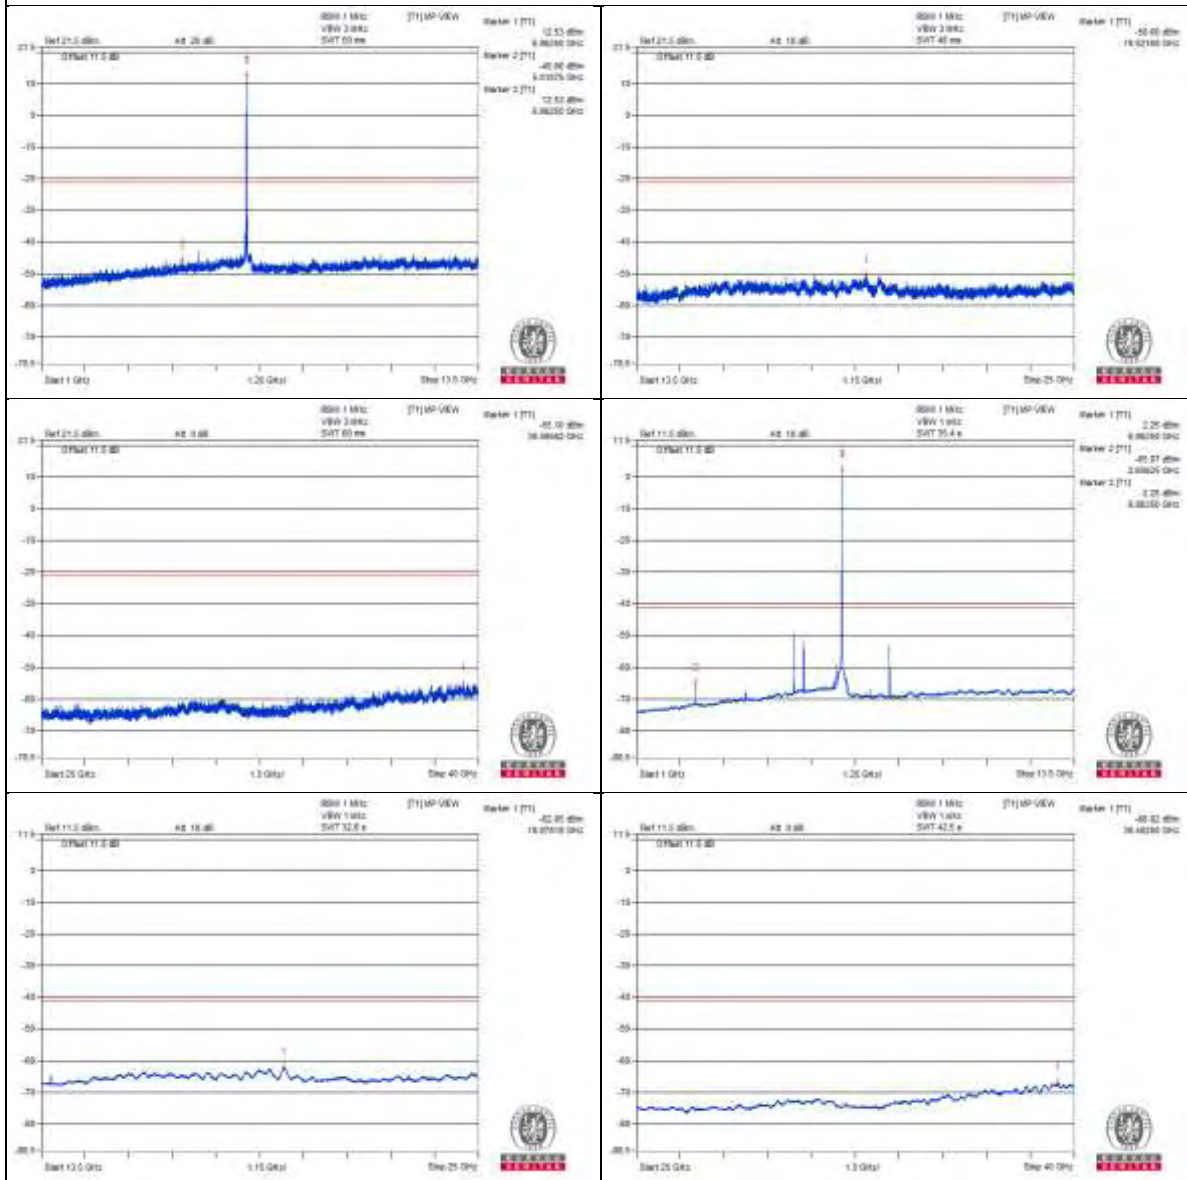

Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	7224.4 PK	60.6	88.2	-27.6	-46.74	-45.1	8.17	-34.66
2	7202.9 AV	47.04	68.2	-21.16	-59.43	-59.37	8.17	-48.22


Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8


d = measurement distance in 3 meters.

* The unwanted emission was verified and the test result was passed by radiated measurement.

Chain 0

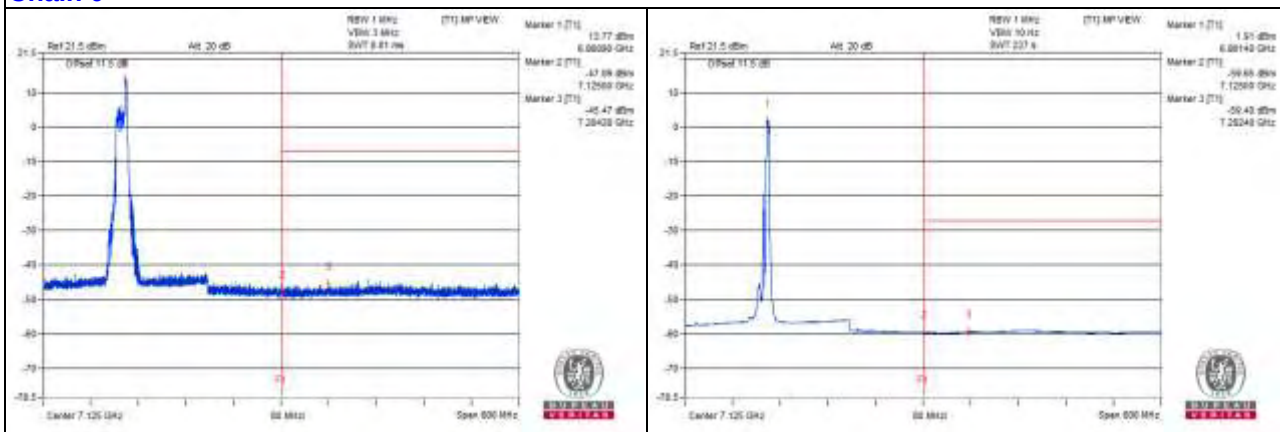

Chain 1

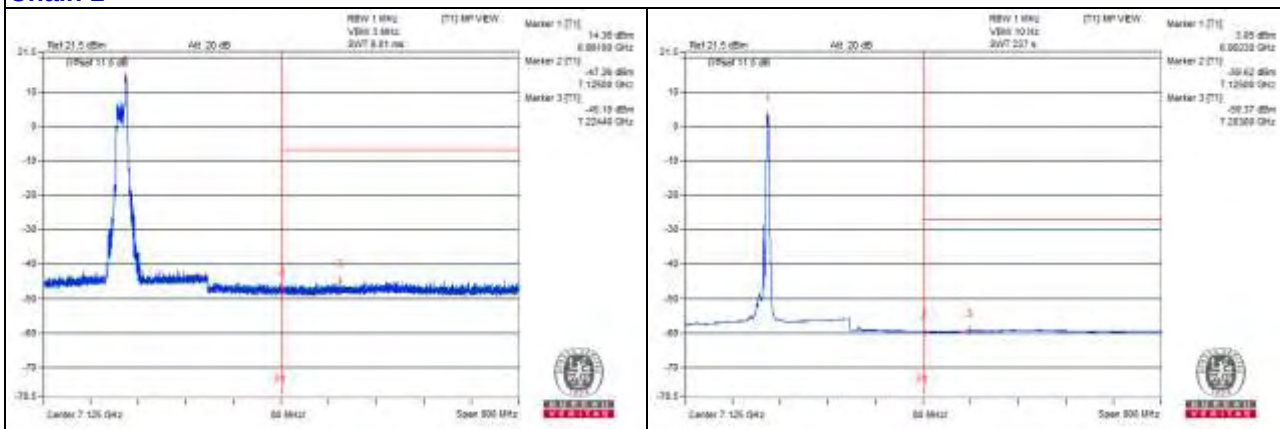

RU106

Channel 2

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	1729.68 PK	53.59	74	-20.41	-54.03	-51.93	8.17	-41.67
2	1731.25 AV	32.95	54	-21.05	-73.54	-73.44	8.17	-62.31
3	5482.81 PK	58.42	88.2	-29.78	-47.62	-48.46	8.17	-36.84
4	5485.93 AV	37.49	68.2	-30.71	-69.05	-68.85	8.17	-57.77
5	5756.25 PK	59.34	88.2	-28.86	-47.13	-47.07	8.17	-35.92
6	5759.37 AV	40.22	68.2	-27.98	-64.71	-68.57	8.17	-55.04
7	7914.06 PK	58.13	88.2	-30.07	-48.43	-48.2	8.17	-37.13
8	7914.06 AV	40.38	68.2	-27.82	-65.48	-66.74	8.17	-54.88
9	11867.18 PK	58.96	74	-15.04	-47.5	-47.46	8.17	-36.3
10	11865.62 AV	38.32	54	-15.68	-68.05	-68.2	8.17	-56.94
11	17805.31 PK	52.1	74	-21.9	-54.38	-54.31	8.17	-43.16
12	17809.62 AV	41.84	54	-12.16	-64.92	-64.3	8.17	-53.42

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

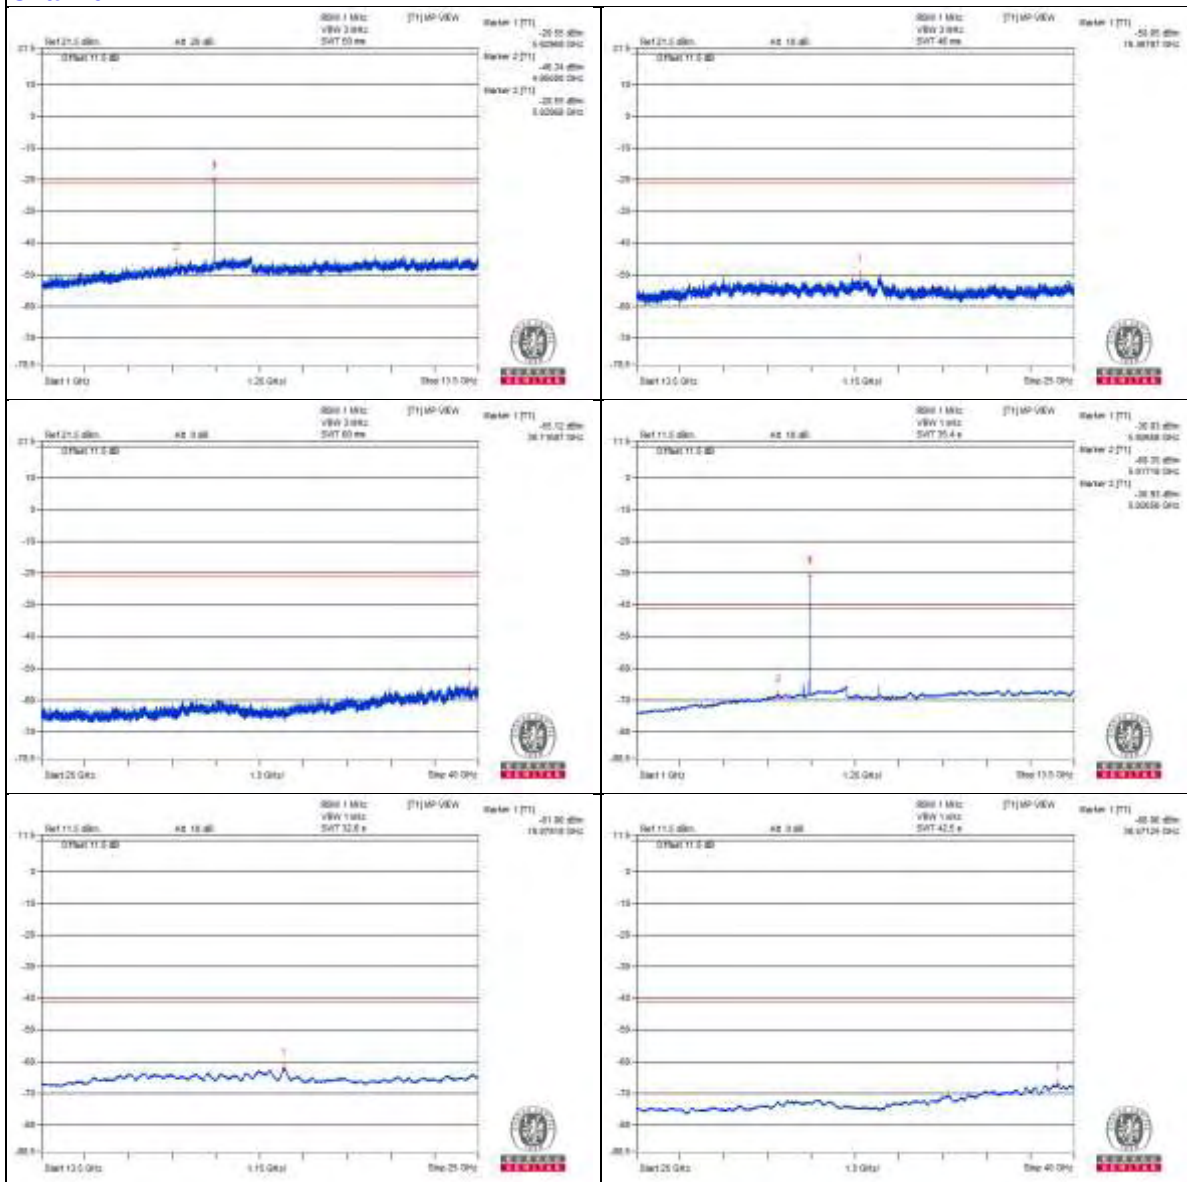

Chain 1

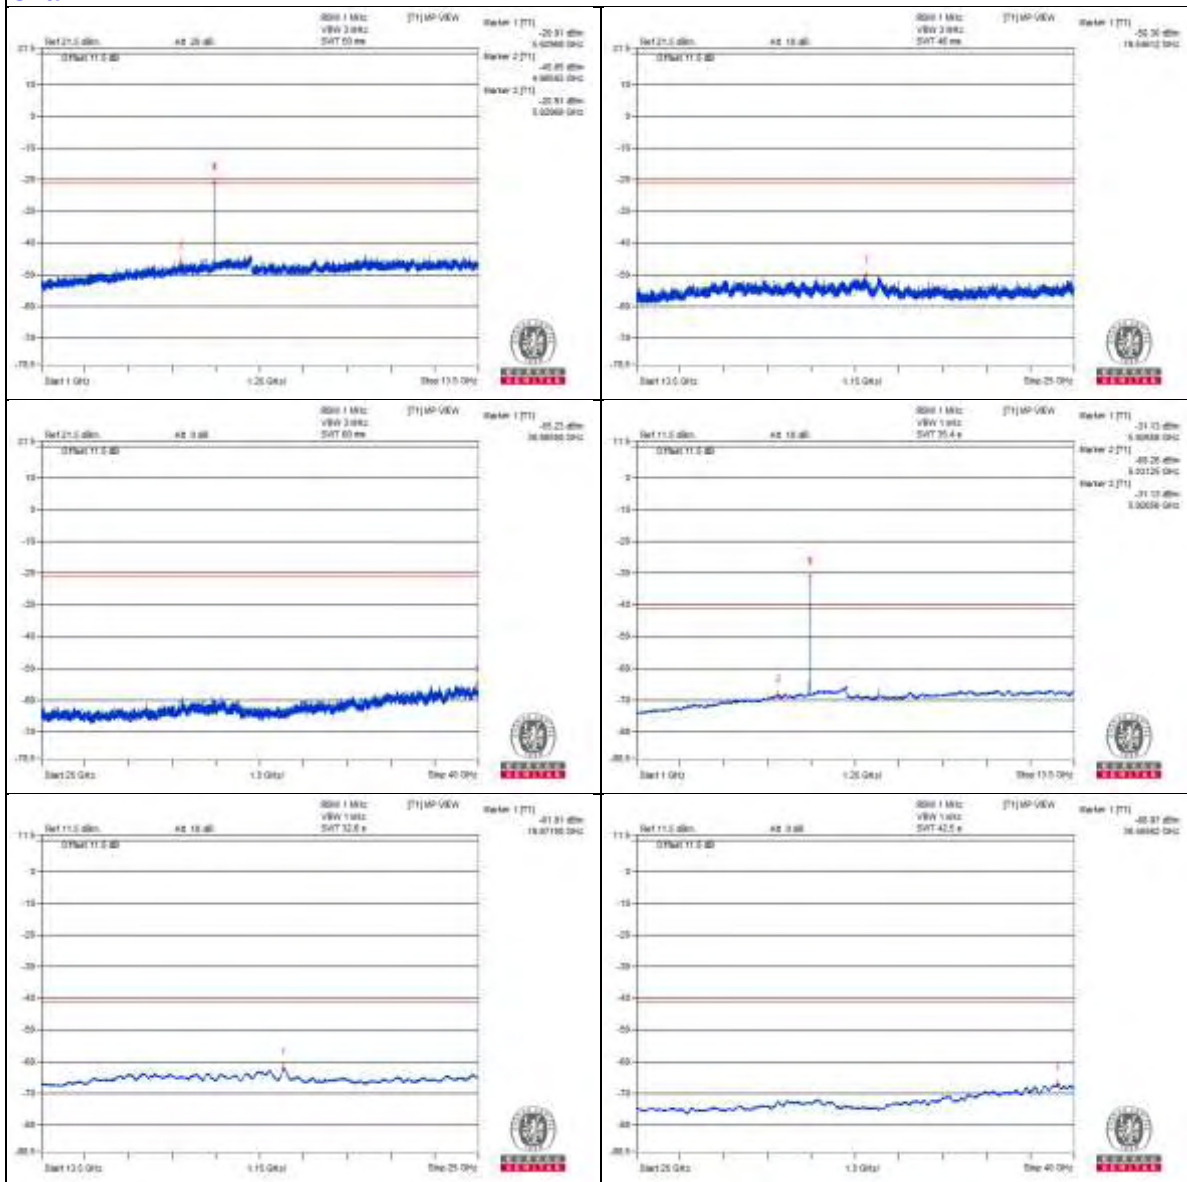

Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5925 PK	83.24	88.2	-4.96	-23.08	-23.29	8.15	-12.02
2	5925 AV	71.51	68.2	*3.31	-34.59	-35.26	8.15	-23.75

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.


* The unwanted emission was verified and the test result was passed by radiated measurement.

(Please refer APPENDIX B)

Chain 0

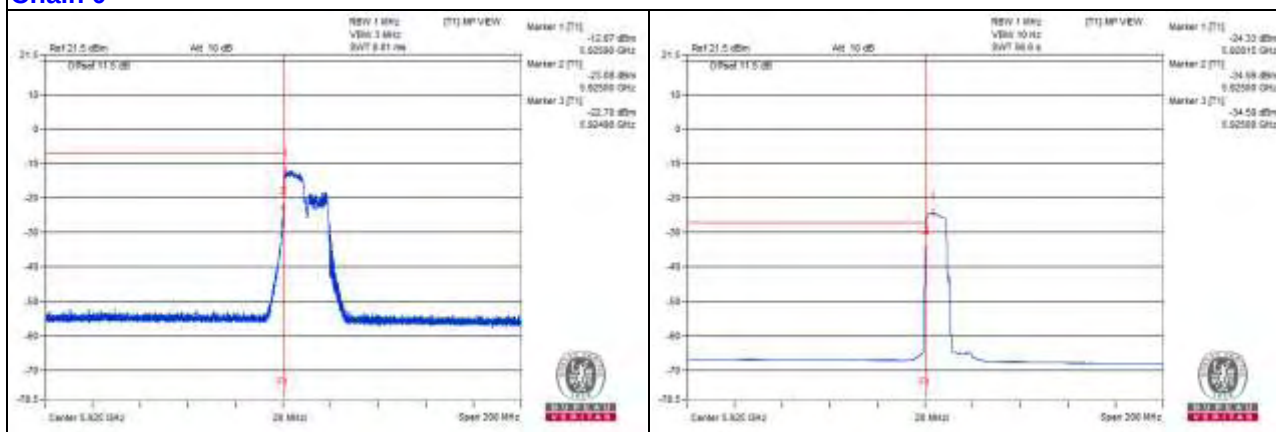

Chain 1

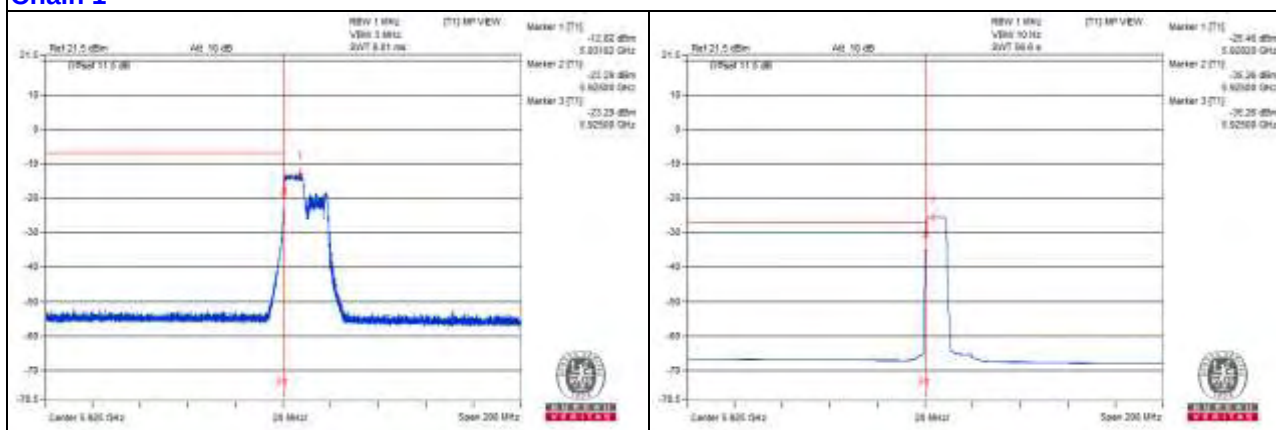

Channel 1

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	1746.87 PK	54.54	74	-19.46	-51.24	-52.69	8.17	-40.72
2	1745.31 AV	43.8	54	-10.2	-62.18	-63.15	8.17	-51.46
3	5481.25 PK	58.6	88.2	-29.6	-47.39	-48.35	8.17	-36.66
4	5484.37 AV	38.83	68.2	-29.37	-68.12	-67.15	8.17	-56.43
5	5759.37 PK	61.65	88.2	-26.55	-43.97	-45.81	8.17	-33.61
6	5759.37 AV	55.57	68.2	-12.63	-50.21	-51.64	8.17	-39.69
7	7940.62 PK	59.55	88.2	-28.65	-48.81	-45.56	8.17	-35.71
8	7940.62 AV	44.72	68.2	-23.48	-63.95	-60.25	8.17	-50.54
9	11906.25 PK	59.51	74	-14.49	-46.31	-47.66	8.17	-35.75
10	11907.81 AV	38.56	54	-15.44	-67.89	-67.88	8.17	-56.7
11	17870 PK	53.32	74	-20.68	-52.41	-53.96	8.17	-41.94
12	17861.37 AV	42.52	54	-11.48	-63.84	-64	8.17	-52.74

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

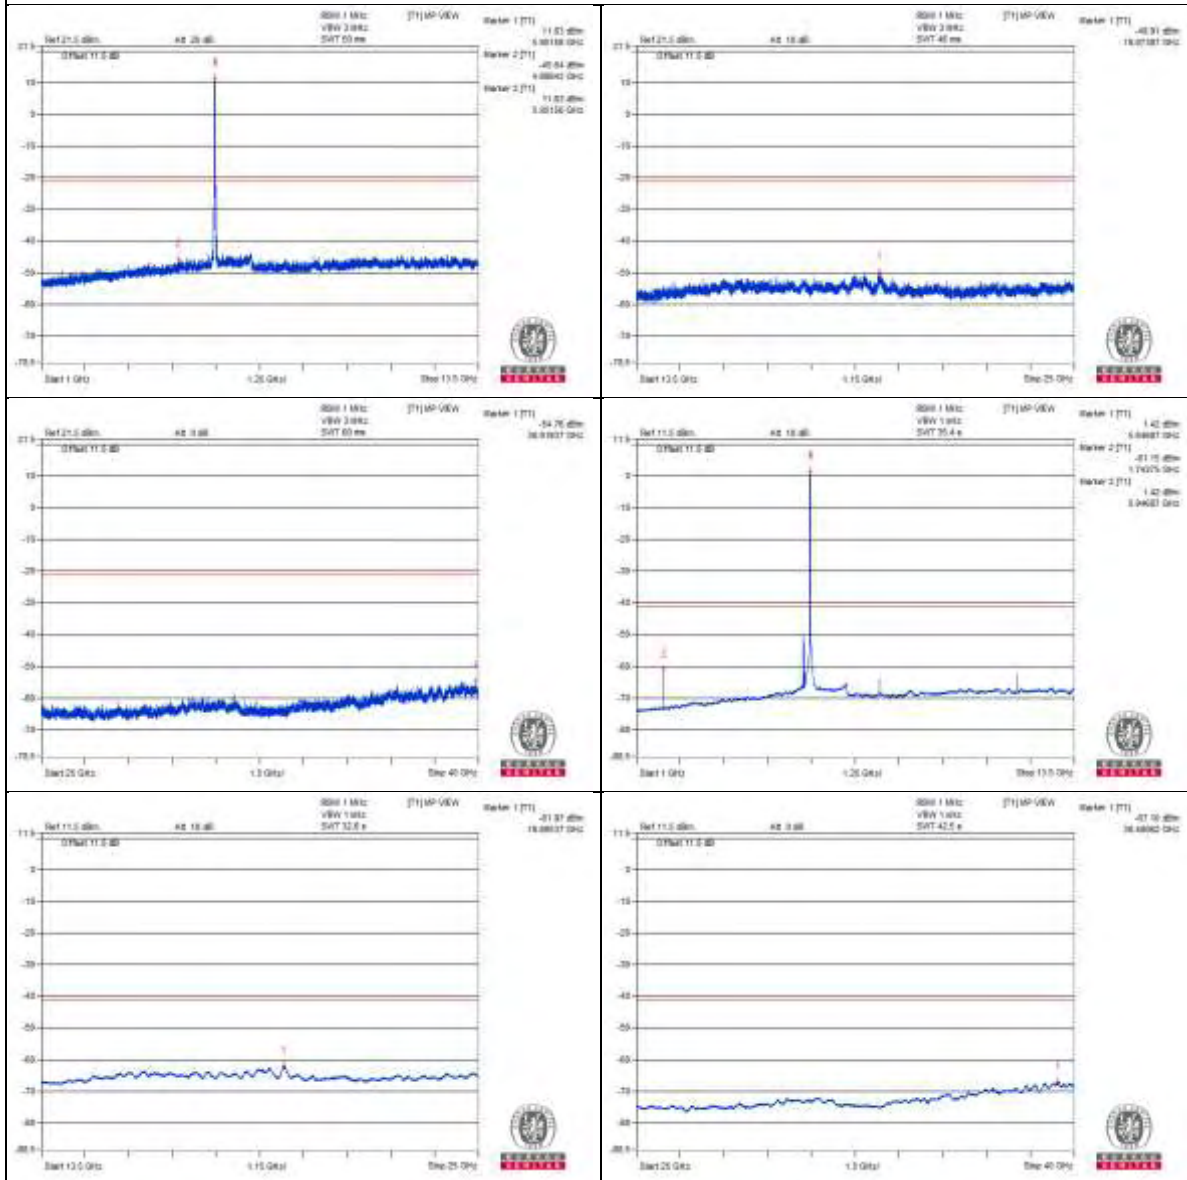

Chain 1

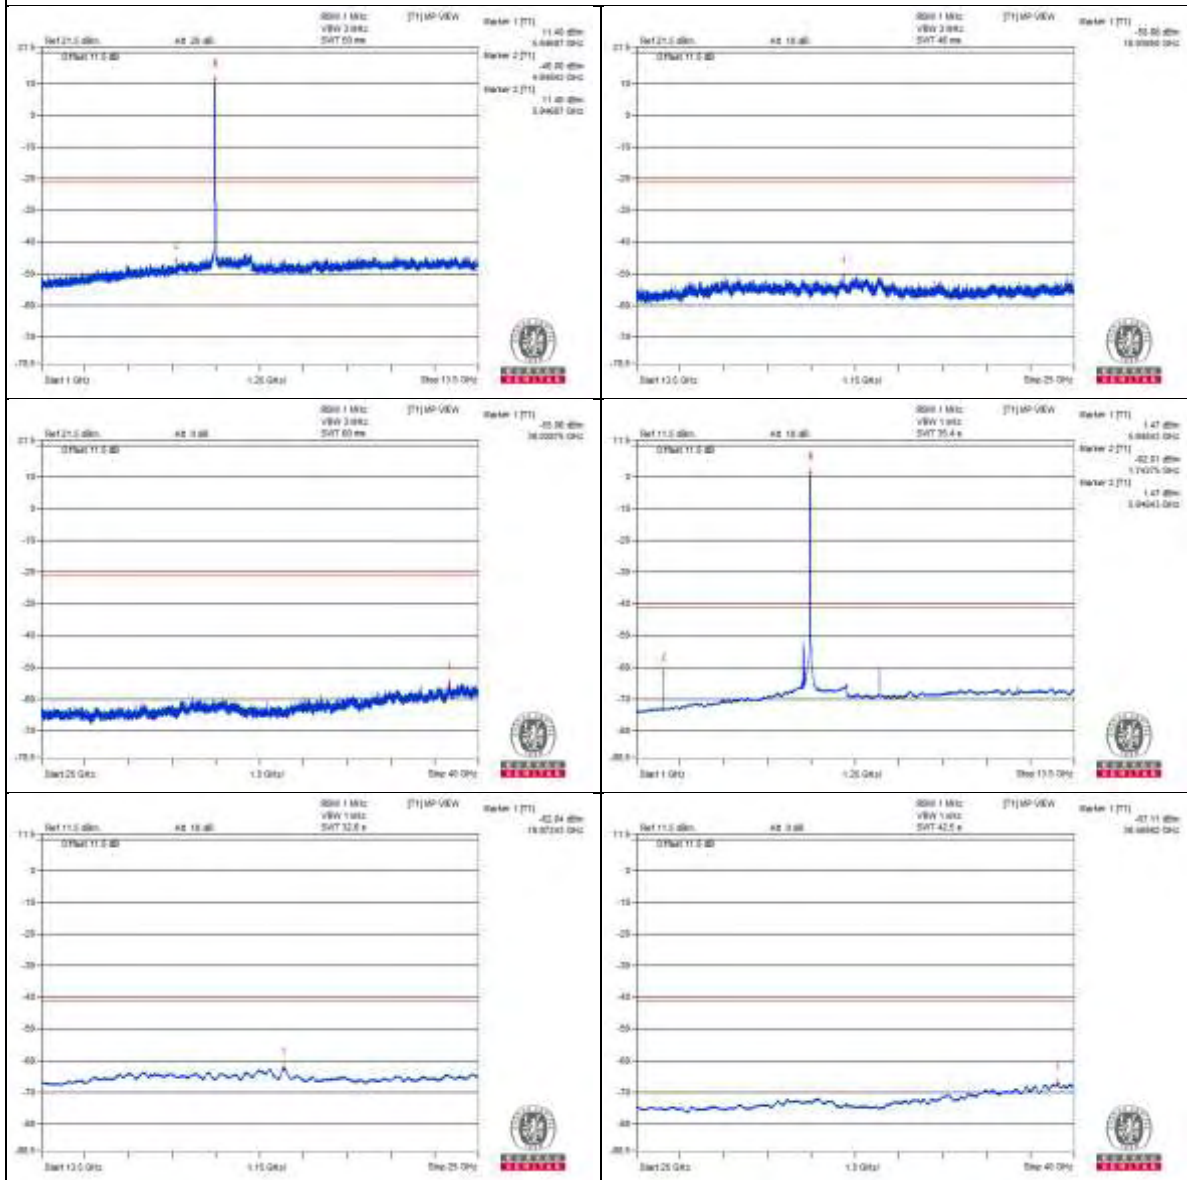

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5921.95 PK	79.78	88.2	-8.42	-23.83	-37.01	8.15	-15.48
2	5924.97 AV	58.1	68.2	-10.1	-48.27	-48.37	8.15	-37.16

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

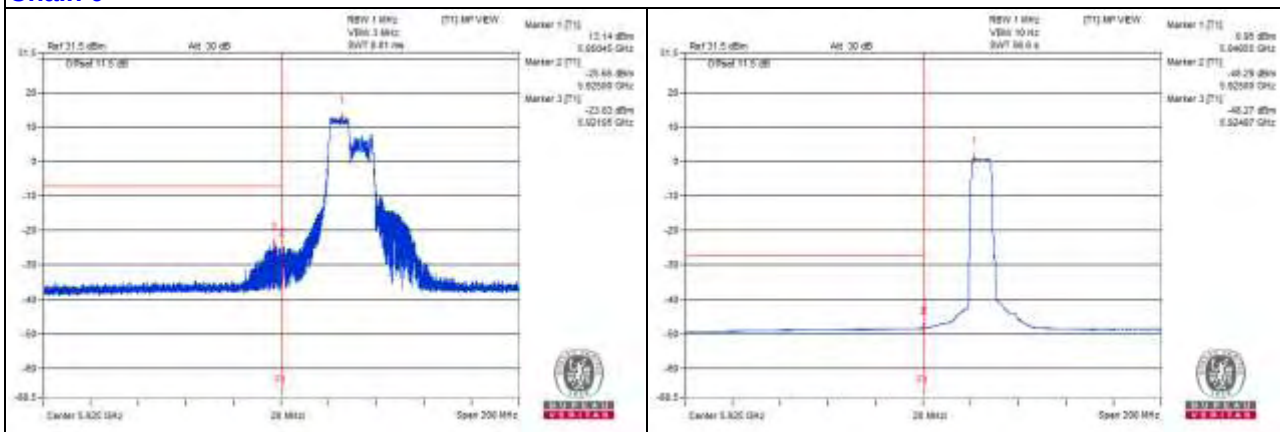

Chain 1

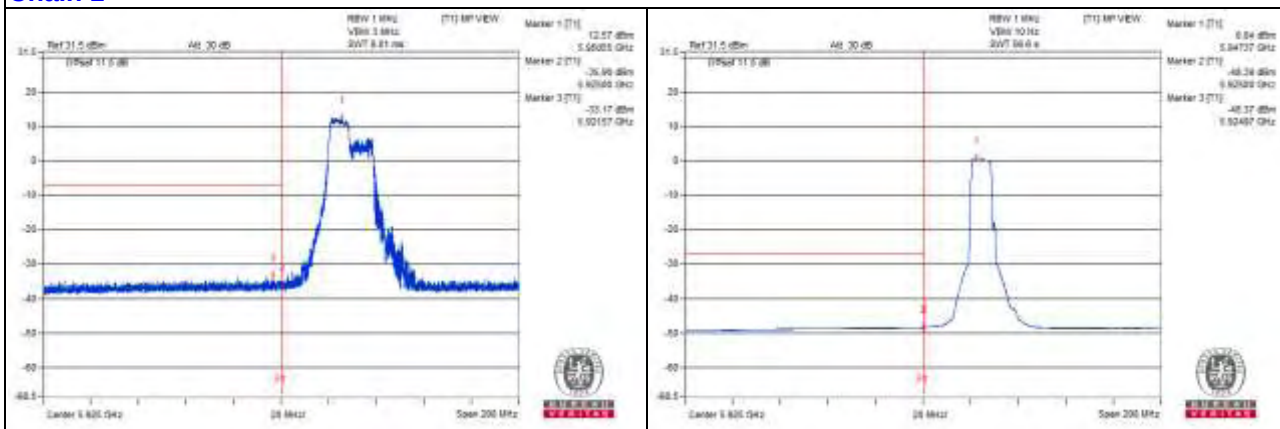

Channel 45

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	1968.75 PK	55.11	74	-18.89	-52.69	-50.3	8.17	-40.15
2	1965.62 AV	44.88	54	-9.12	-61.64	-61.48	8.17	-50.38
3	5487.5 PK	59.16	88.2	-29.04	-47.47	-47.09	8.17	-36.1
4	5487.5 AV	39.95	68.2	-28.25	-66.43	-66.55	8.17	-55.31
5	5759.37 PK	64.45	88.2	-23.75	-42.5	-41.53	8.17	-30.81
6	5759.37 AV	59.89	68.2	-8.31	-46.66	-46.45	8.17	-35.37
7	8232.81 PK	58.79	74	-15.21	-47.7	-47.6	8.17	-36.47
8	8232.81 AV	45.17	54	-8.83	-61.19	-61.36	8.17	-50.09
9	12348.43 PK	60.24	74	-13.76	-45.76	-46.69	8.17	-35.02
10	12345.31 AV	39.47	54	-14.53	-66.93	-67.01	8.17	-55.79
11	18528.37 PK	53.03	74	-20.97	-53.3	-53.52	8.17	-42.23
12	18525.5 AV	41.77	54	-12.23	-64.71	-64.64	8.17	-53.49

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

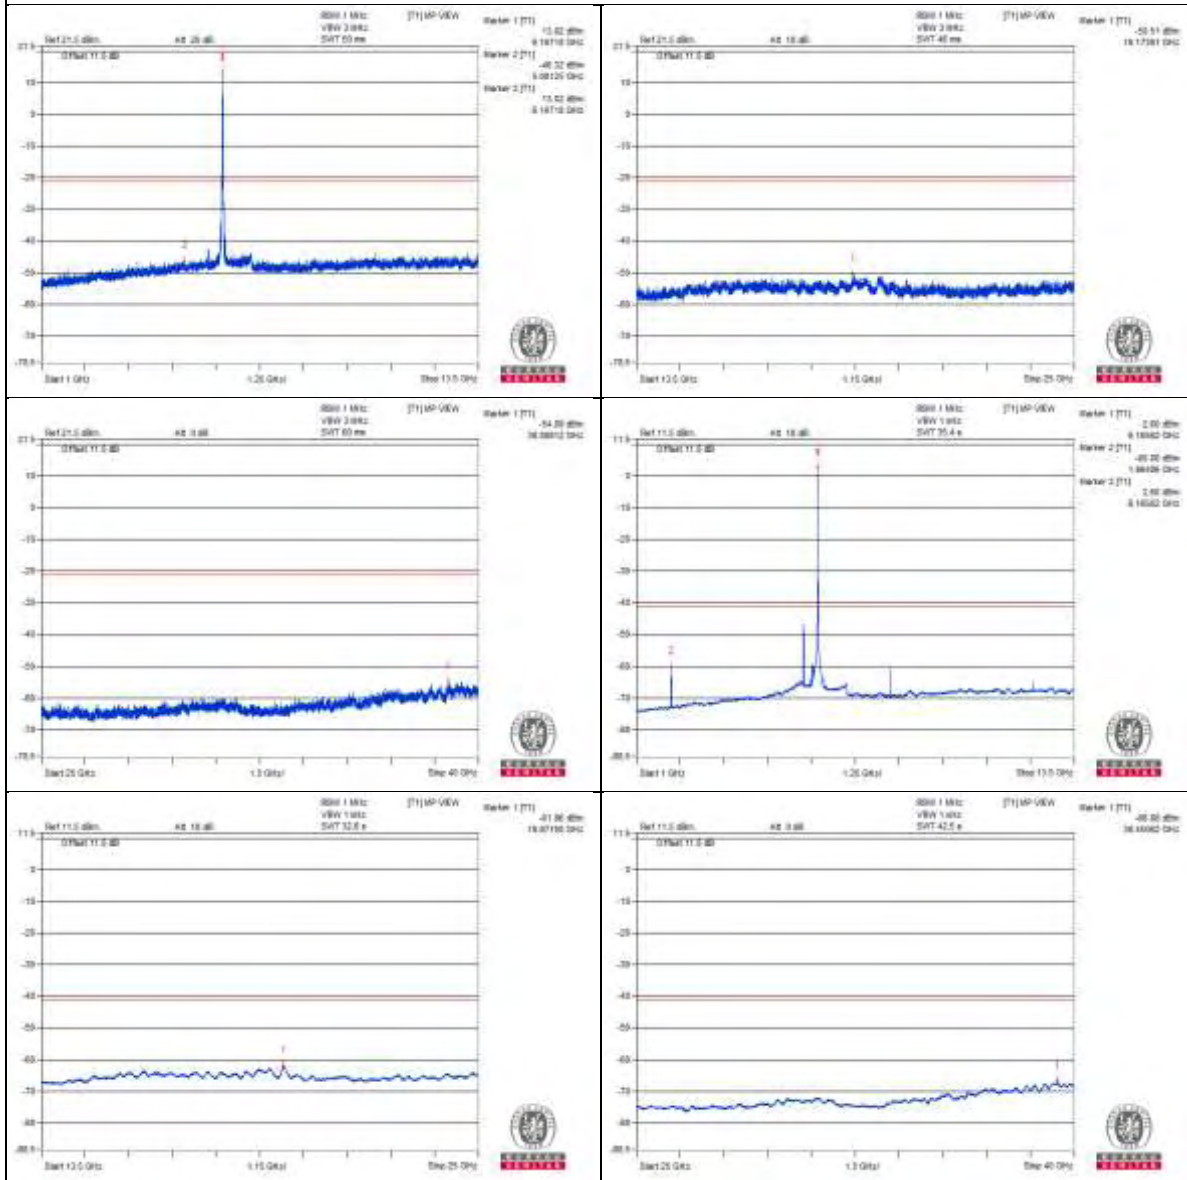

Chain 1

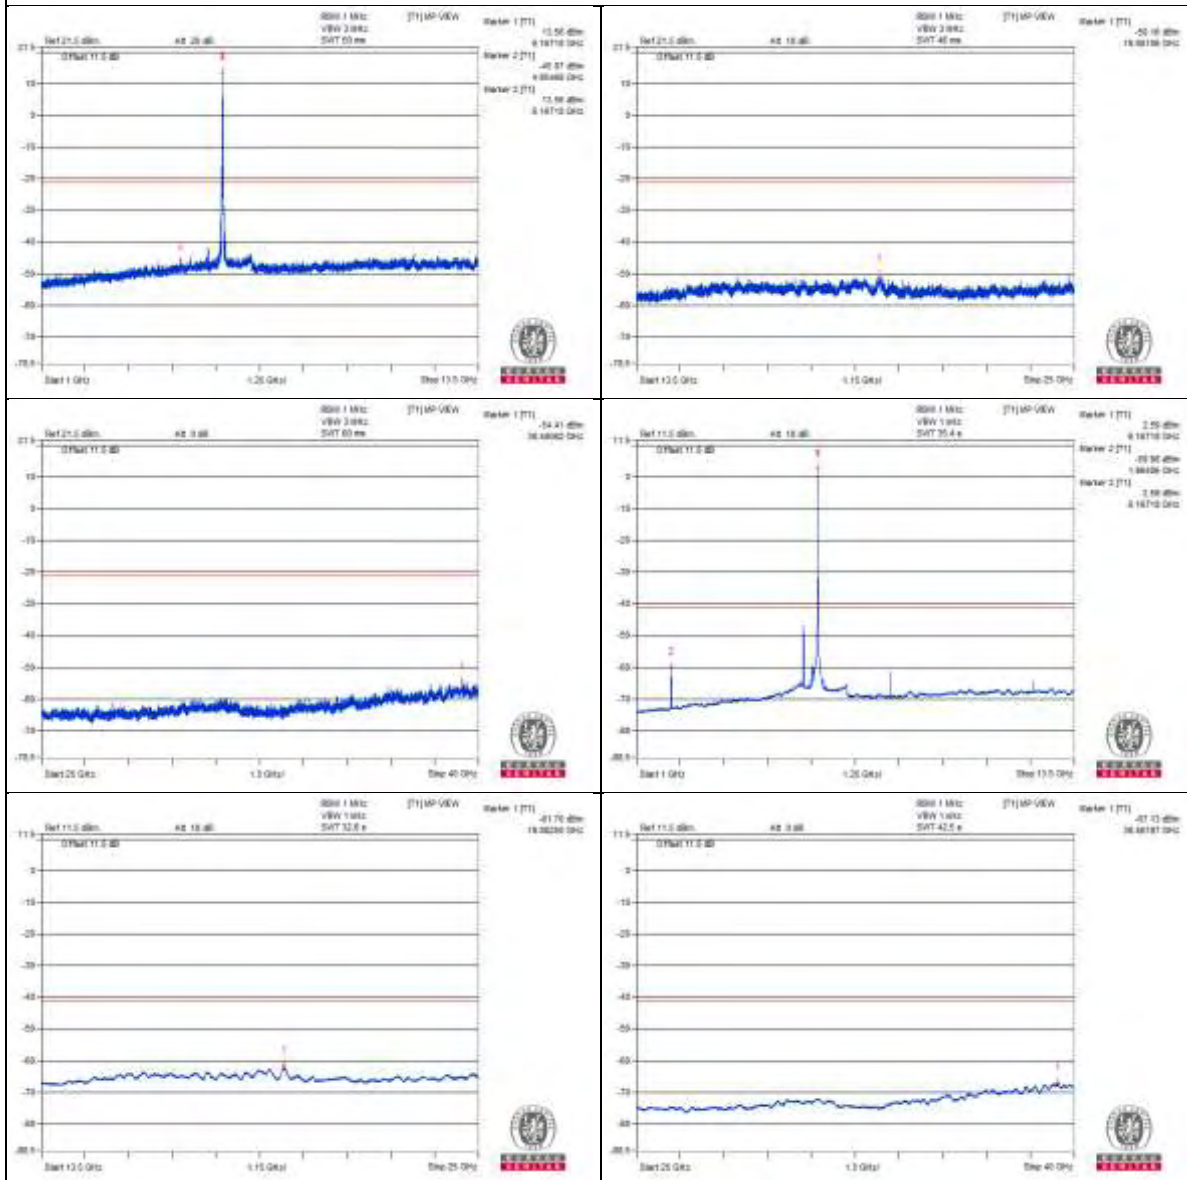

Channel 93

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	2212.5 PK	54.9	74	-19.1	-51.36	-51.73	8.17	-40.36
2	2214.06 AV	46.81	54	-7.19	-59.46	-59.8	8.17	-48.45
3	5485.93 PK	59.5	88.2	-28.7	-46.22	-47.8	8.17	-35.76
4	5484.37 AV	38.33	68.2	-29.87	-68.35	-67.89	8.17	-56.93
5	5759.37 PK	59.3	88.2	-28.9	-47.14	-47.15	8.17	-35.96
6	5759.37 AV	50.88	68.2	-17.32	-55.4	-55.72	8.17	-44.38
7	8551.56 PK	58.31	88.2	-29.89	-48.1	-48.16	8.17	-36.95
8	8553.12 AV	46.13	68.2	-22.07	-60.3	-60.32	8.17	-49.13
9	12832.81 PK	60.29	88.2	-27.91	-47.67	-45.02	8.17	-34.97
10	12834.37 AV	39.47	68.2	-28.73	-66.89	-67.05	8.17	-55.79
11	19250 PK	54.36	74	-19.64	-52.08	-52.09	8.17	-40.9
12	19250 AV	43.33	54	-10.67	-63.15	-63.07	8.17	-51.93

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

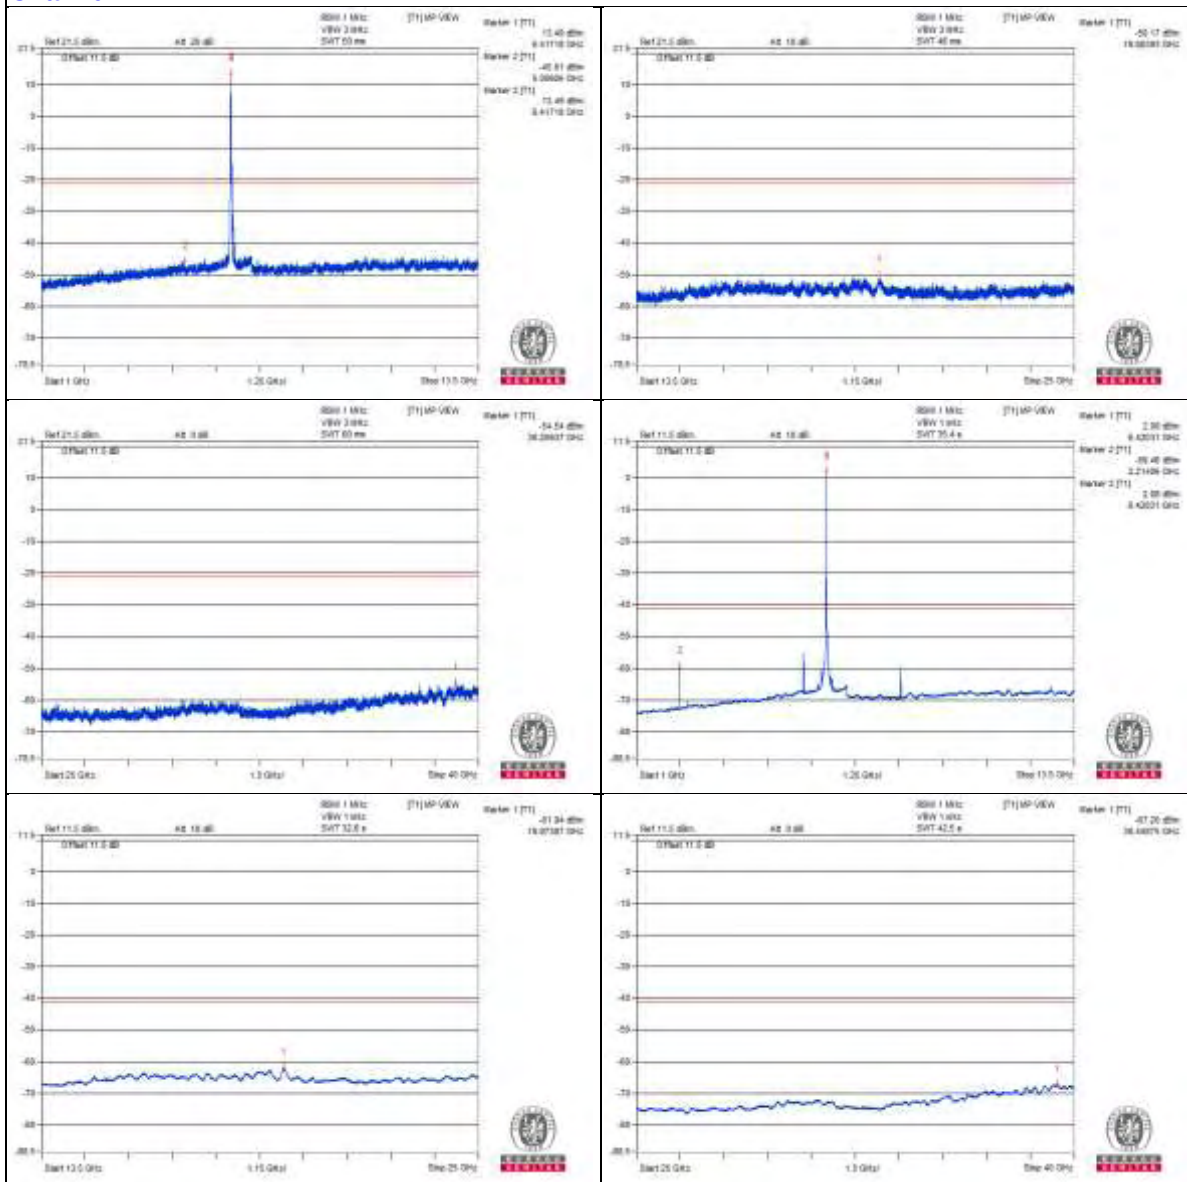

Chain 1

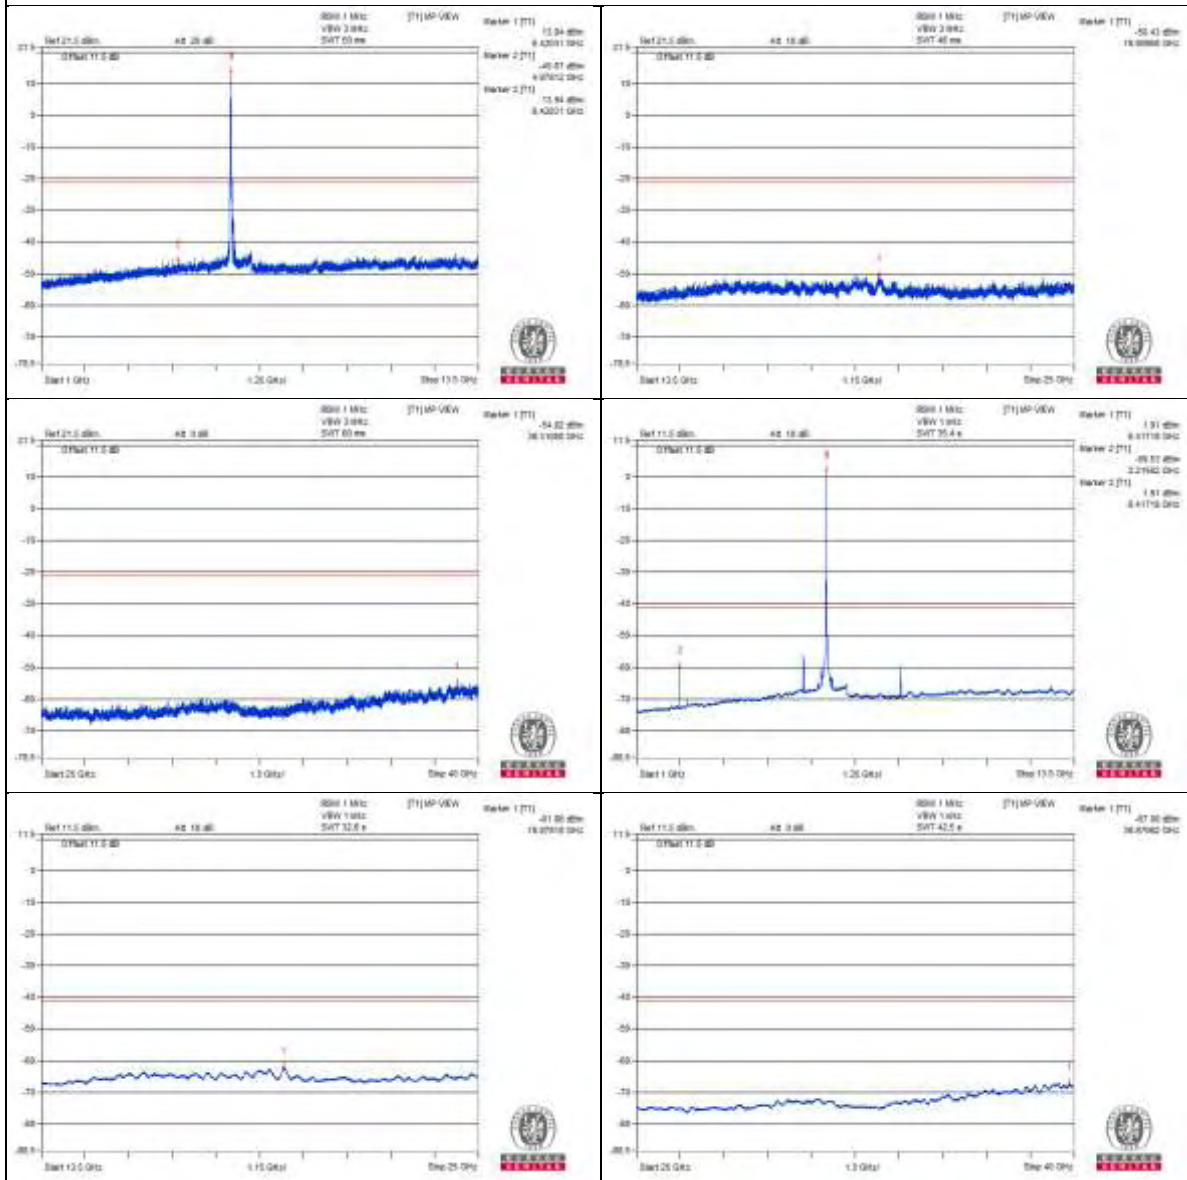

Channel 117

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	2325 PK	55.03	74	-18.97	-51.55	-51.28	8.17	-40.23
2	2325 AV	46.75	54	-7.25	-59.76	-59.62	8.17	-48.51
3	5482.81 PK	59.48	88.2	-28.72	-46.87	-47.06	8.17	-35.78
4	5482.81 AV	38.18	68.2	-30.02	-68.26	-68.26	8.17	-57.08
5	5759.37 PK	60.37	88.2	-27.83	-45.99	-46.15	8.17	-34.89
6	5759.37 AV	51.76	68.2	-16.44	-54.7	-54.67	8.17	-43.5
7	8714.06 PK	59.7	88.2	-28.5	-47.18	-46.35	8.17	-35.56
8	8714.06 AV	46.48	68.2	-21.72	-61.54	-58.8	8.17	-48.78
9	13070.31 PK	60.91	88.2	-27.29	-45.53	-45.53	8.17	-34.35
10	13075 AV	38.81	68.2	-29.39	-67.75	-67.51	8.17	-56.45
11	19603.62 PK	52.81	74	-21.19	-53.44	-53.82	8.17	-42.45
12	19605.06 AV	41.97	54	-12.03	-64.49	-64.45	8.17	-53.29

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

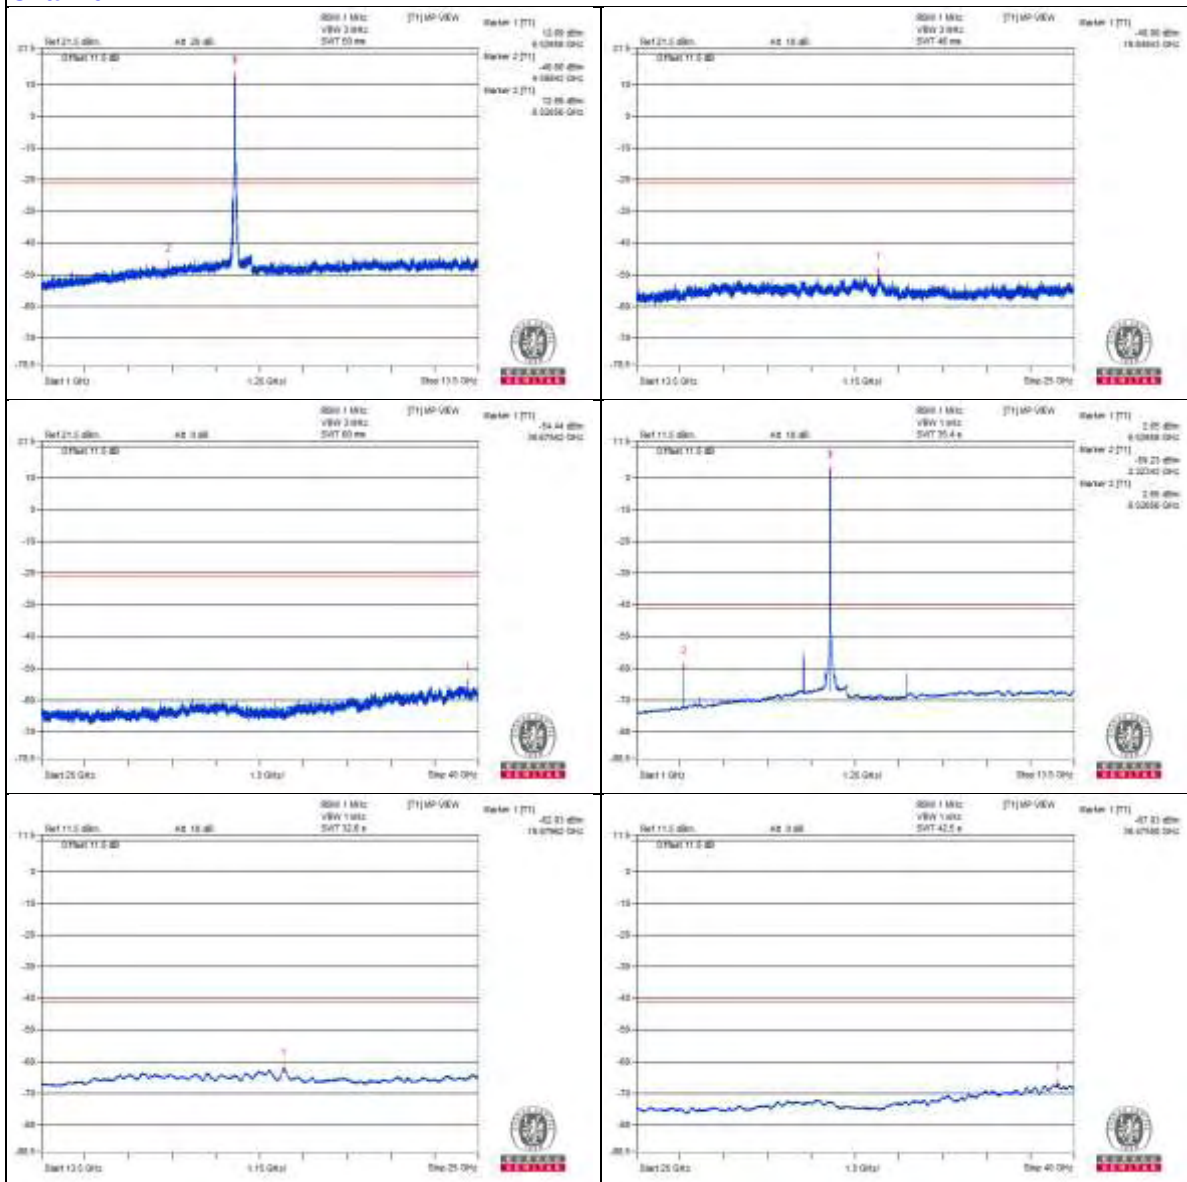

Chain 1

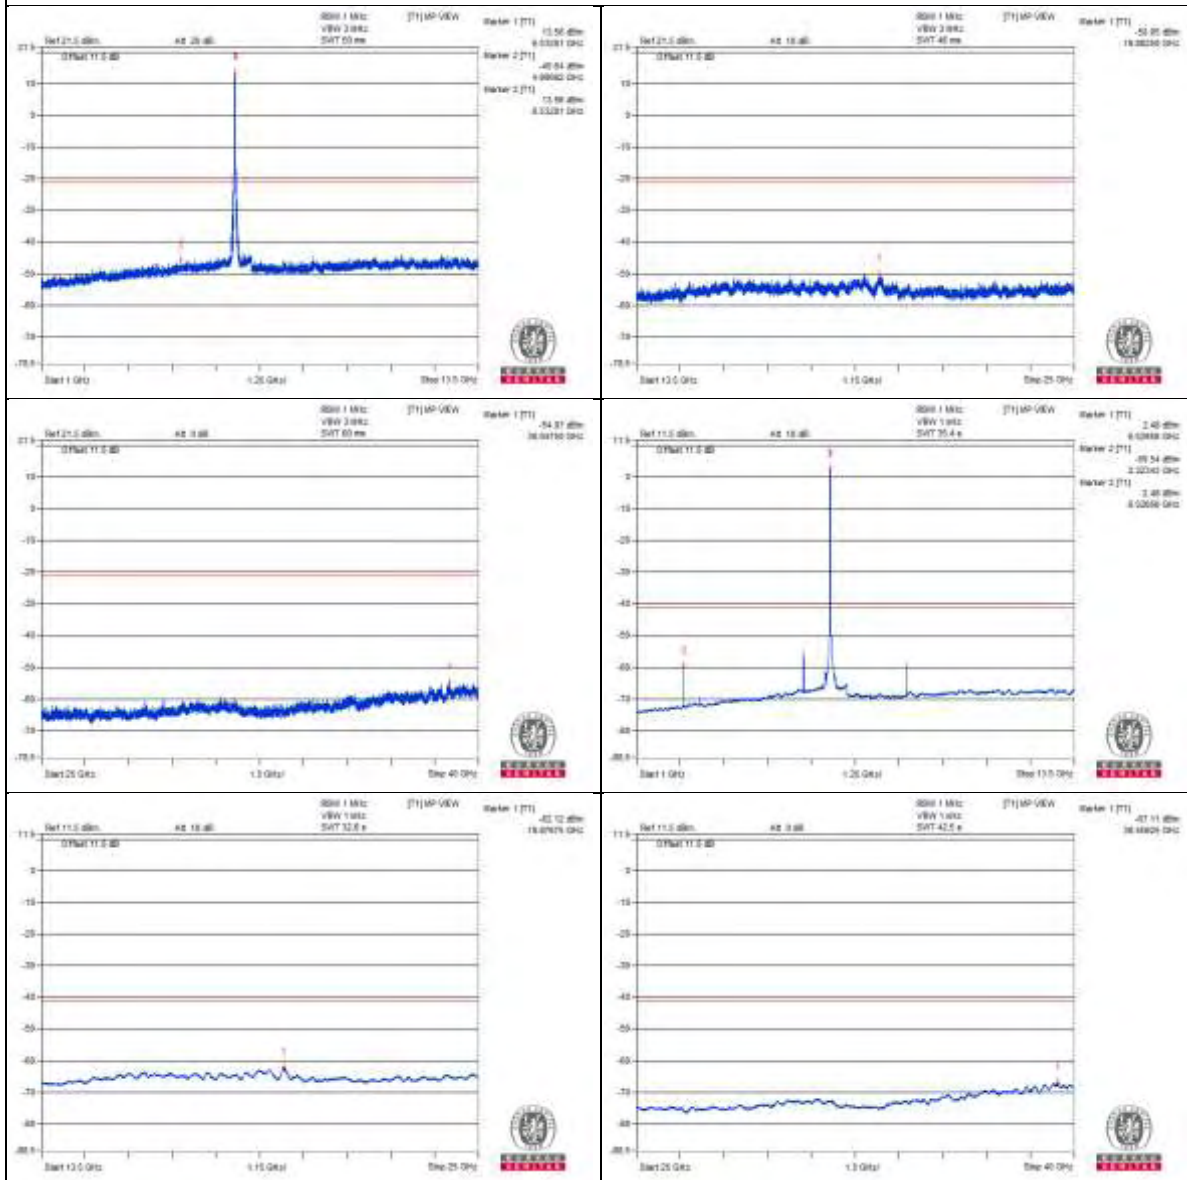

Channel 149

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	2492.18 PK	55.51	74	-18.49	-50.31	-51.65	8.17	-39.75
2	2493.75 AV	46.75	54	-7.25	-59.61	-59.78	8.17	-48.51
3	5482.81 PK	58.54	88.2	-29.66	-46.84	-49.3	8.17	-36.72
4	5481.25 AV	38.21	68.2	-29.99	-68.36	-68.11	8.17	-57.05
5	5759.37 PK	60.87	88.2	-27.33	-46.38	-44.89	8.17	-34.39
6	5759.37 AV	54.04	68.2	-14.16	-52.48	-52.33	8.17	-41.22
7	8928.12 PK	58.43	88.2	-29.77	-47.86	-48.17	8.17	-36.83
8	8926.56 AV	43.56	68.2	-24.64	-62.88	-62.88	8.17	-51.7
9	13392.18 PK	59.02	74	-14.98	-46.92	-47.98	8.17	-36.24
10	13393.75 AV	37.98	54	-16.02	-68.55	-68.37	8.17	-57.28
11	20088.06 PK	51.8	74	-22.2	-53.93	-55.48	8.17	-43.46
12	20083.75 AV	40.78	54	-13.22	-65.69	-65.64	8.17	-54.48

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

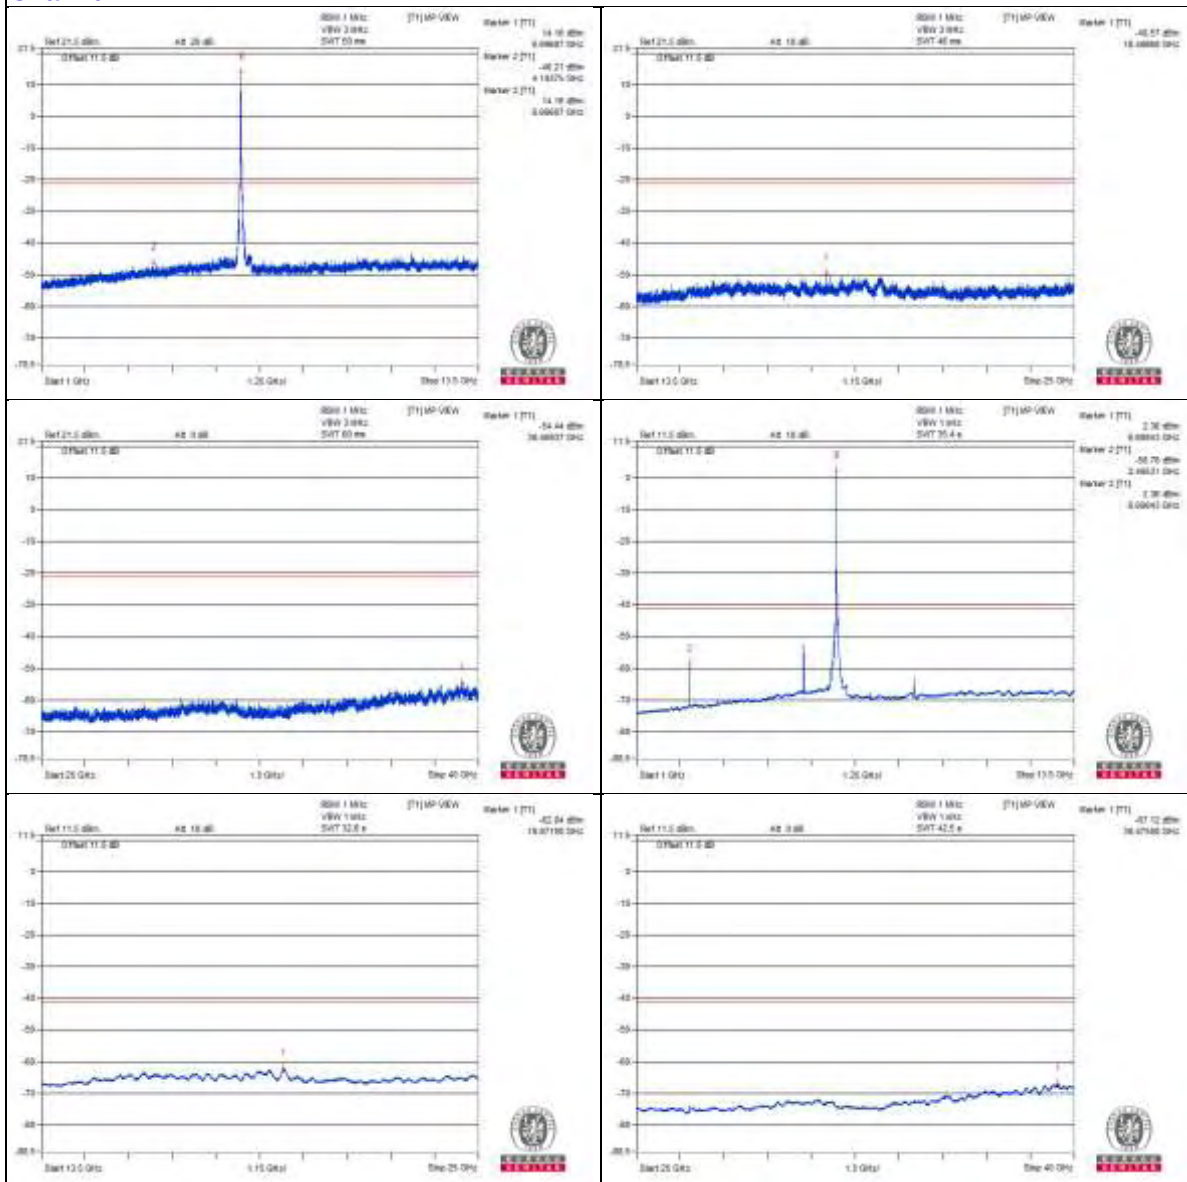

Chain 1

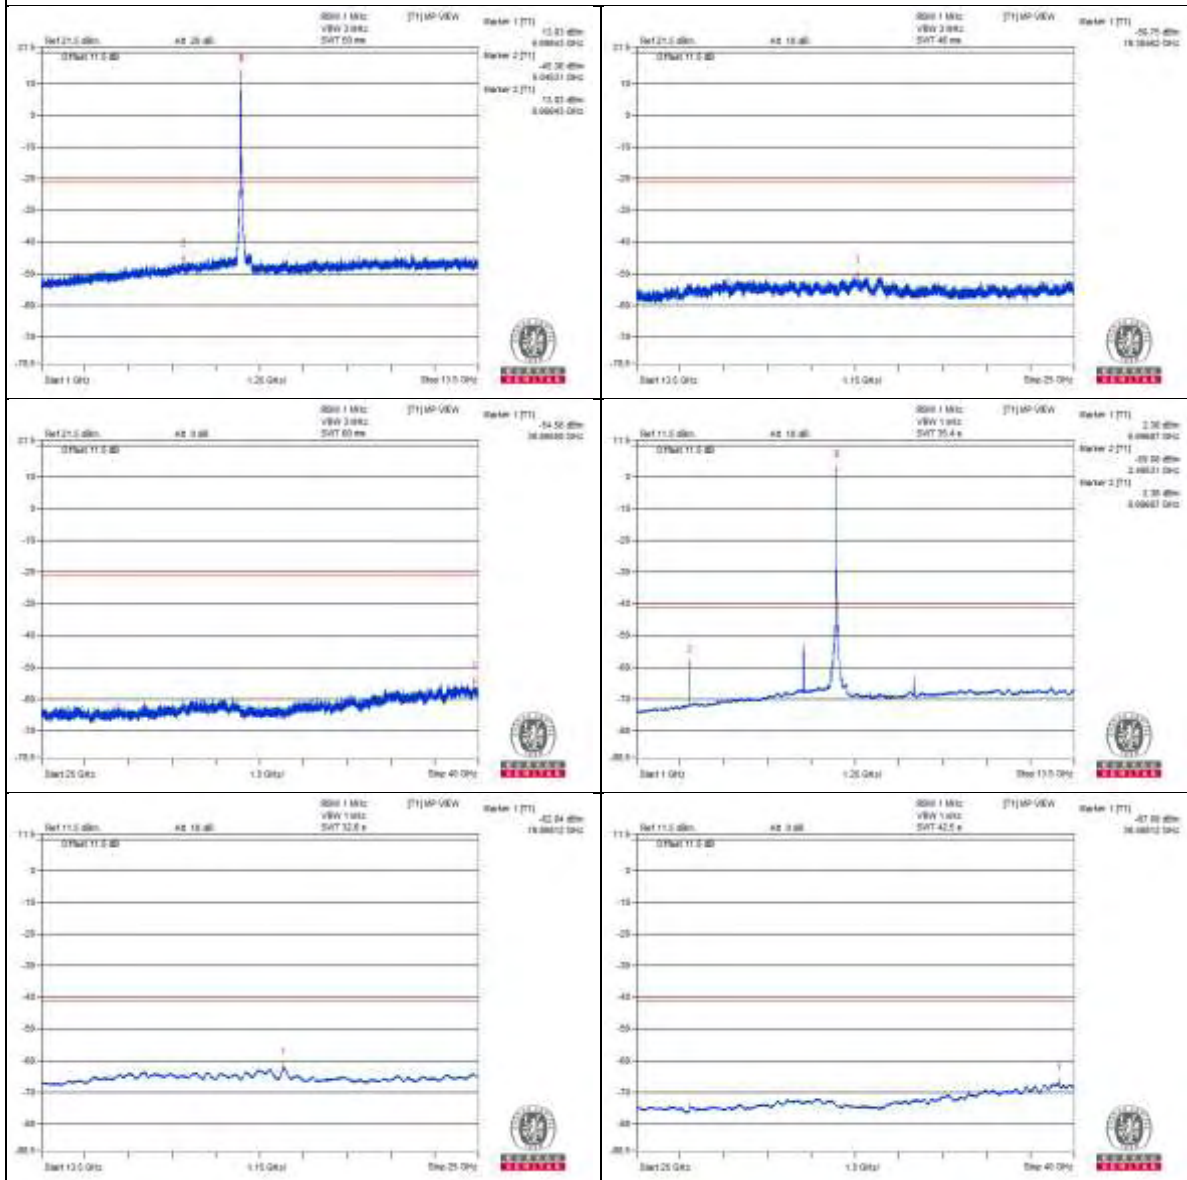

Channel 181

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	2645.31 PK	56.4	74	-17.6	-49.84	-50.25	8.17	-38.86
2	2654.68 AV	42.49	54	-11.51	-63.93	-63.98	8.17	-52.77
3	5484.37 PK	65.98	88.2	-22.22	-41.02	-39.97	8.17	-29.28
4	5484.37 AV	59.4	68.2	-8.8	-47.08	-47.01	8.17	-35.86
5	5759.37 PK	61.11	88.2	-27.09	-44.84	-45.88	8.17	-34.15
6	5759.37 AV	54.18	68.2	-14.02	-52.22	-52.3	8.17	-41.08
7	9135.93 PK	59.65	74	-14.35	-47.01	-46.59	8.17	-35.61
8	9137.5 AV	38.14	54	-15.86	-68.29	-68.31	8.17	-57.12
9	13705.56 PK	51.14	88.2	-37.06	-55.79	-54.86	8.17	-44.12
10	13714.18 AV	39.9	68.2	-28.3	-66.48	-66.61	8.17	-55.36
11	20563.87 PK	52.08	74	-21.92	-54.38	-54.34	8.17	-43.18
12	20565.31 AV	40.48	54	-13.52	-66.1	-65.83	8.17	-54.78

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

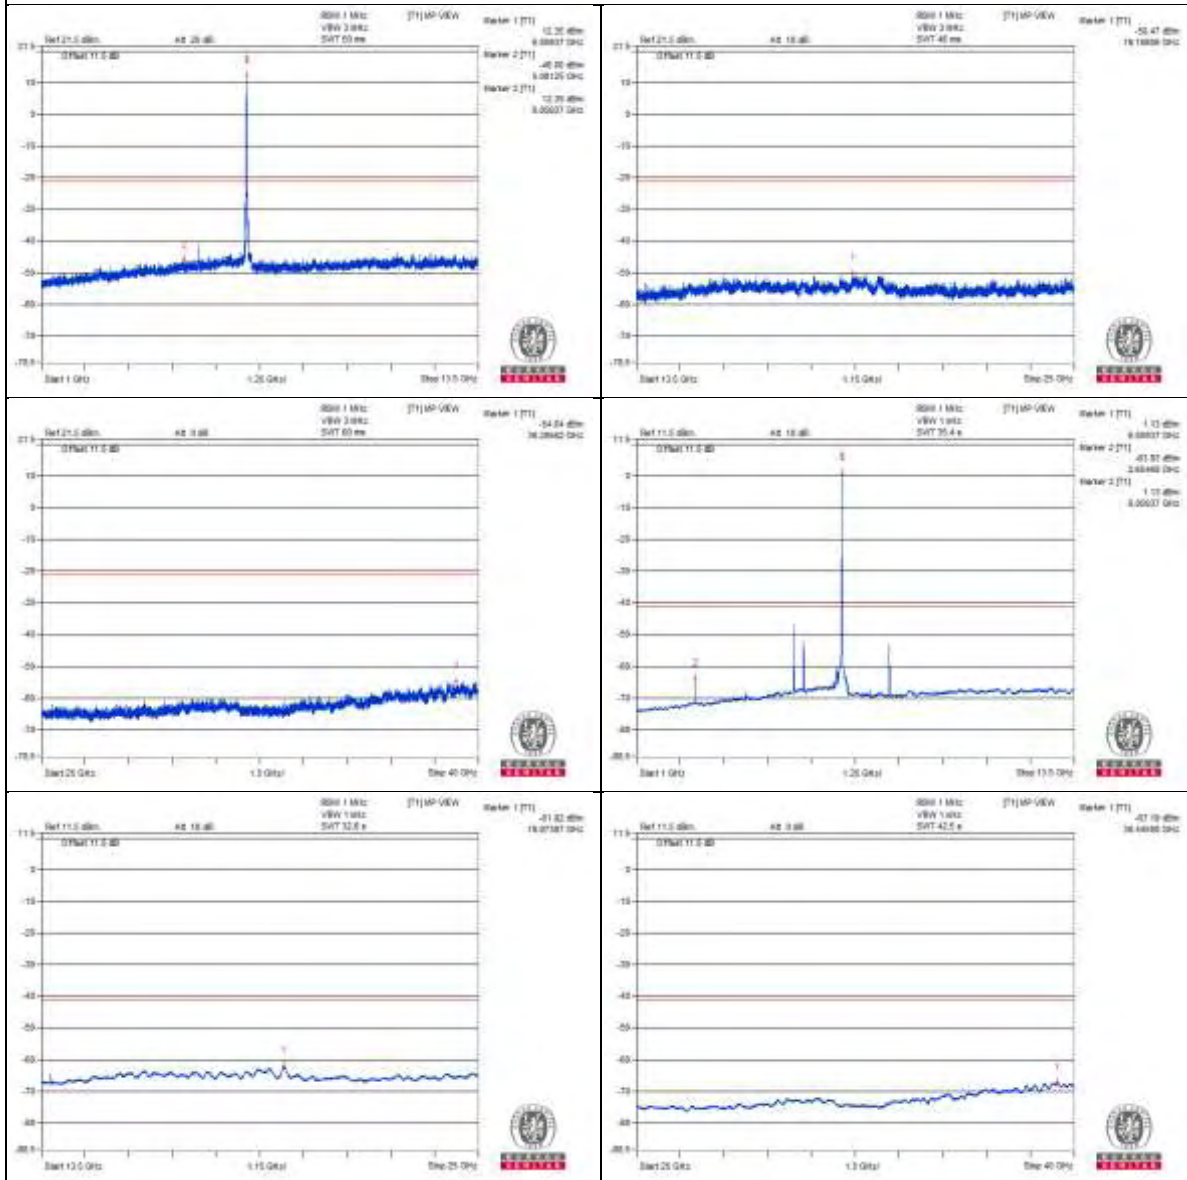

Chain 1

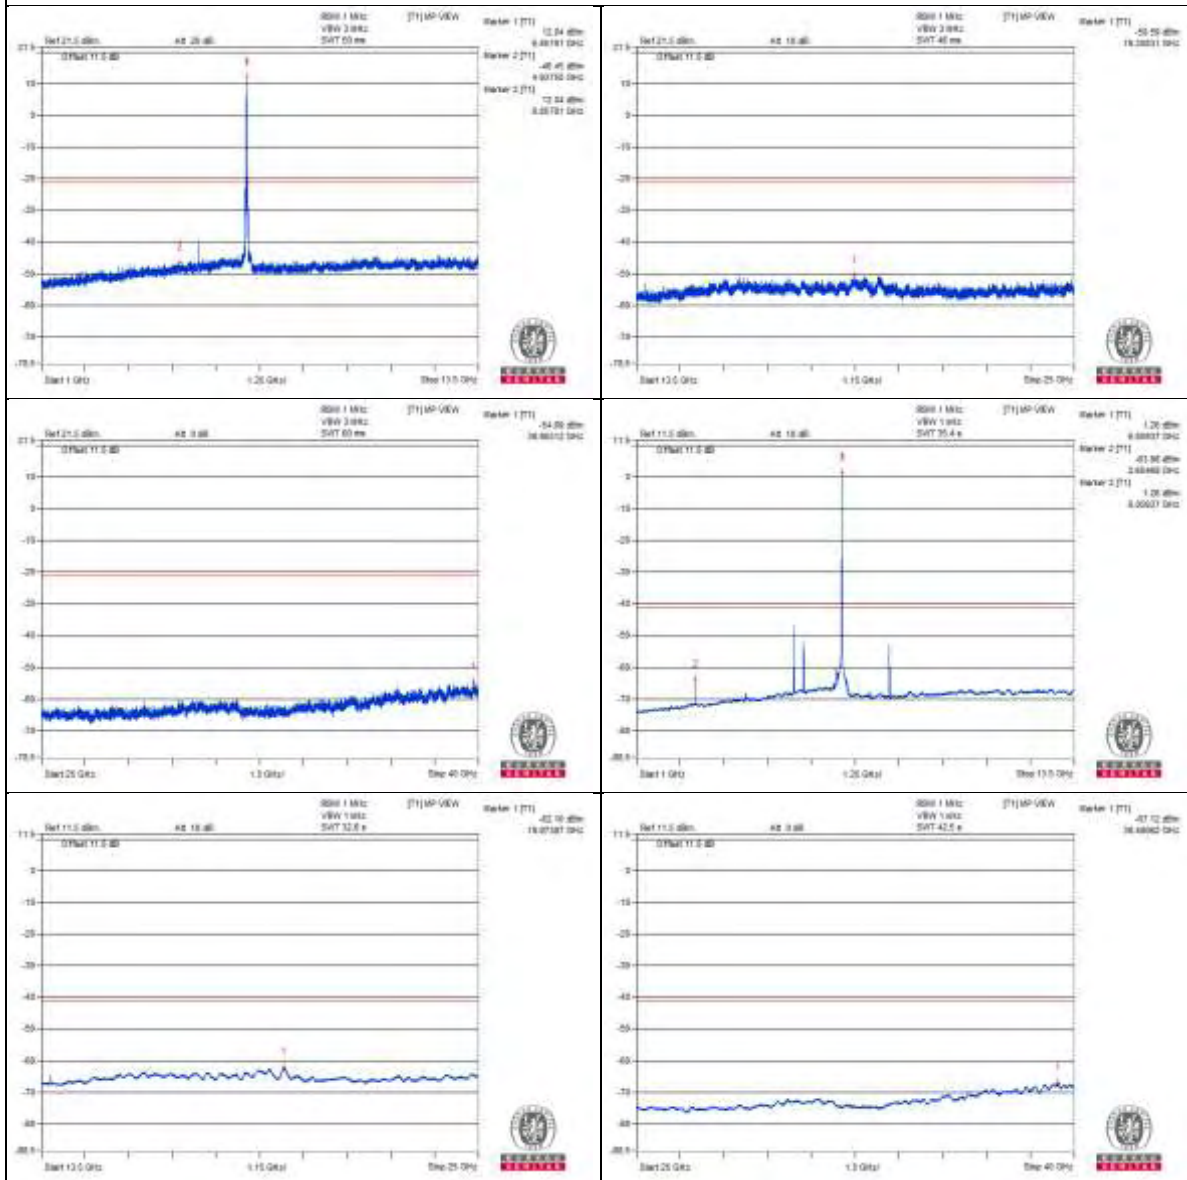

Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	7148.1 PK	60.5	88.2	-27.7	-46.4	-45.52	8.17	-34.76
2	7205.2 AV	47.05	68.2	-21.15	-59.38	-59.41	8.17	-48.21


Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8


d = measurement distance in 3 meters.

* The unwanted emission was verified and the test result was passed by radiated measurement.

Chain 0

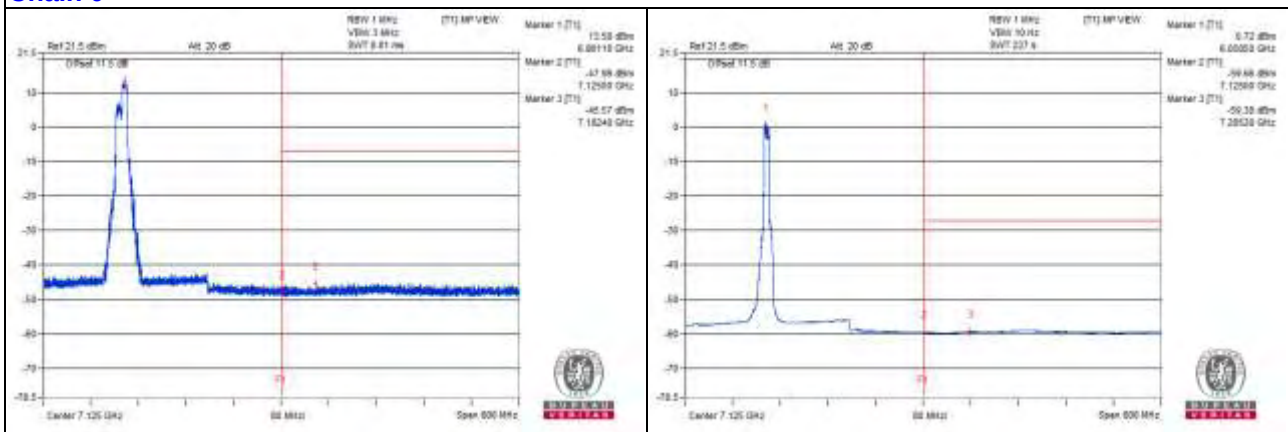

Chain 1

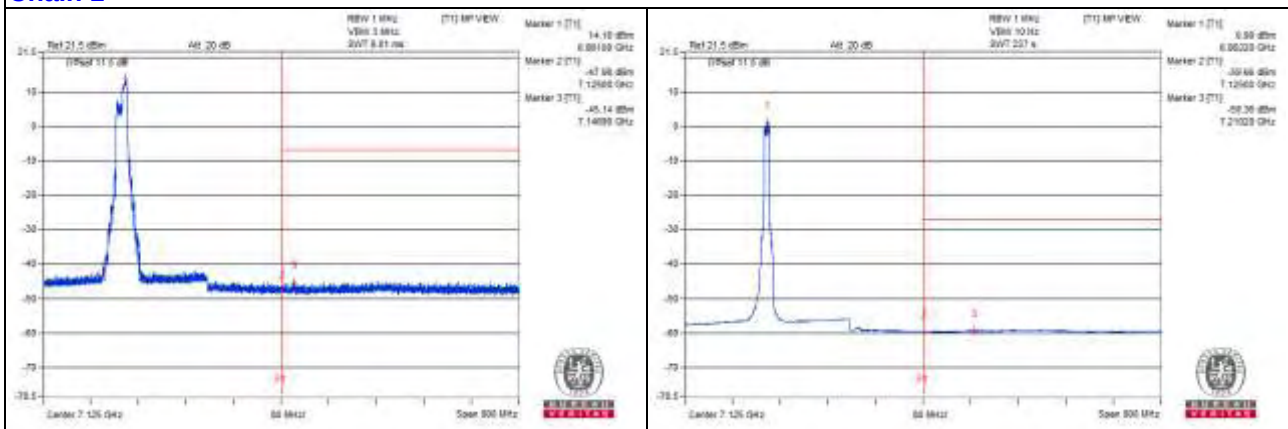

RU242

Channel 2

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	1728.12 PK	54.36	74	-19.64	-51.18	-53.21	8.17	-40.9
2	1731.25 AV	33.06	54	-20.94	-73.41	-73.35	8.17	-62.2
3	5482.81 PK	59.02	88.2	-29.18	-47.52	-47.33	8.17	-36.24
4	5481.25 AV	37.58	68.2	-30.62	-68.82	-68.9	8.17	-57.68
5	5760.93 PK	59.29	88.2	-28.91	-46.4	-48.05	8.17	-35.97
6	5759.37 AV	40.53	68.2	-27.67	-68.79	-64.2	8.17	-54.73
7	7914.06 PK	58.2	88.2	-30	-48.69	-47.84	8.17	-37.06
8	7914.06 AV	40.53	68.2	-27.67	-66.57	-65.34	8.17	-54.73
9	11873.43 PK	60.18	74	-13.82	-46.24	-46.28	8.17	-35.08
10	11870.31 AV	38.24	54	-15.76	-68.28	-68.12	8.17	-57.02
11	17808.18 PK	51.93	74	-22.07	-54.76	-54.28	8.17	-43.33
12	17808.18 AV	41.81	54	-12.19	-64.67	-64.59	8.17	-53.45

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

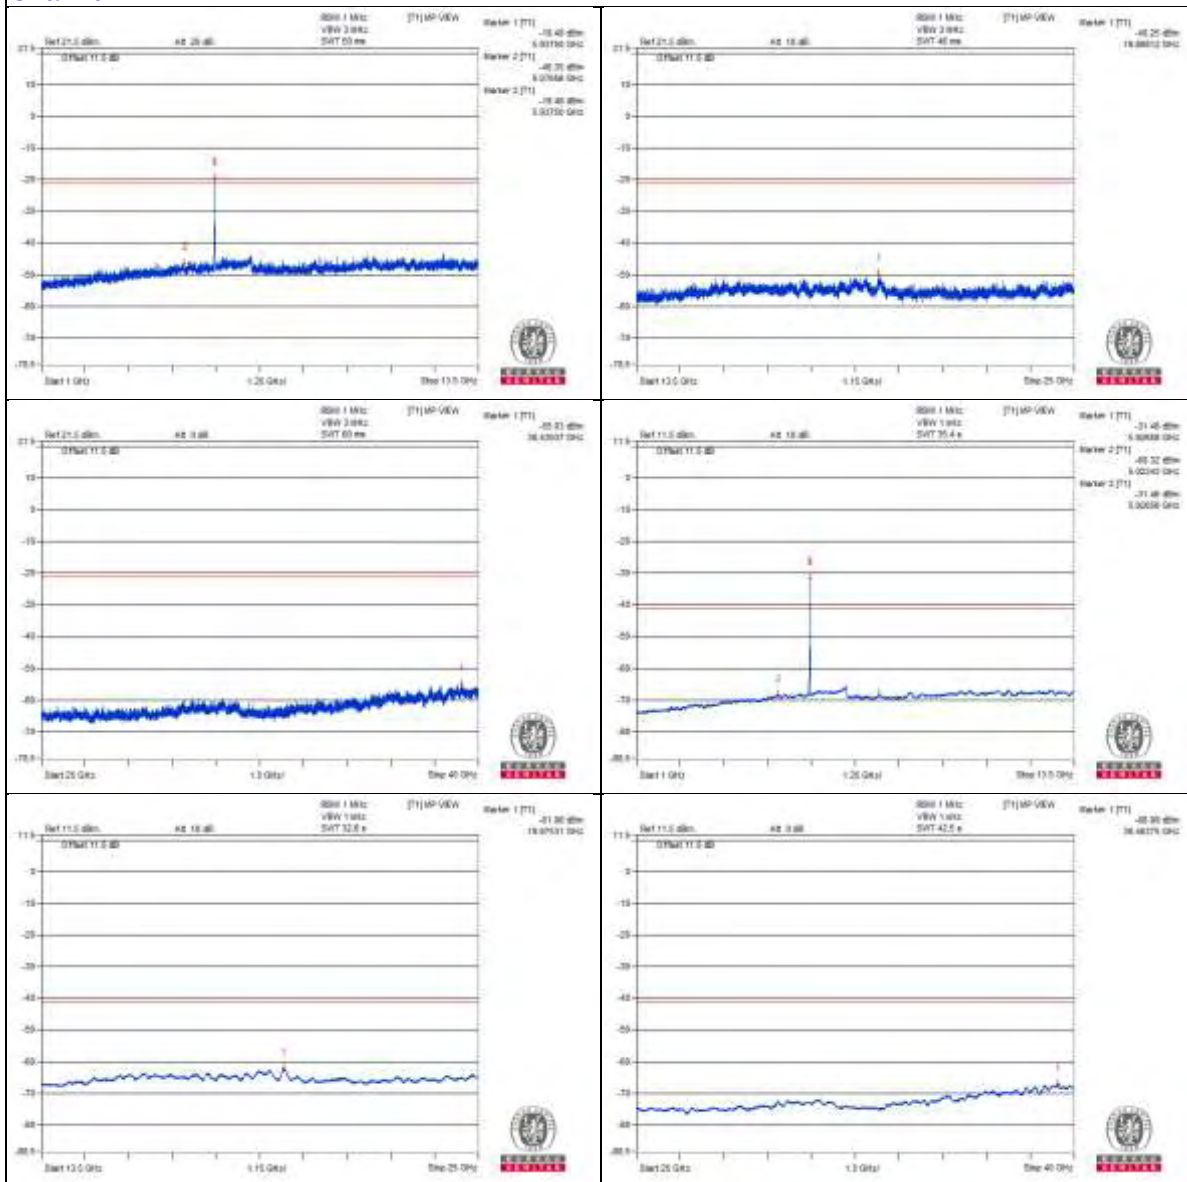

Chain 1

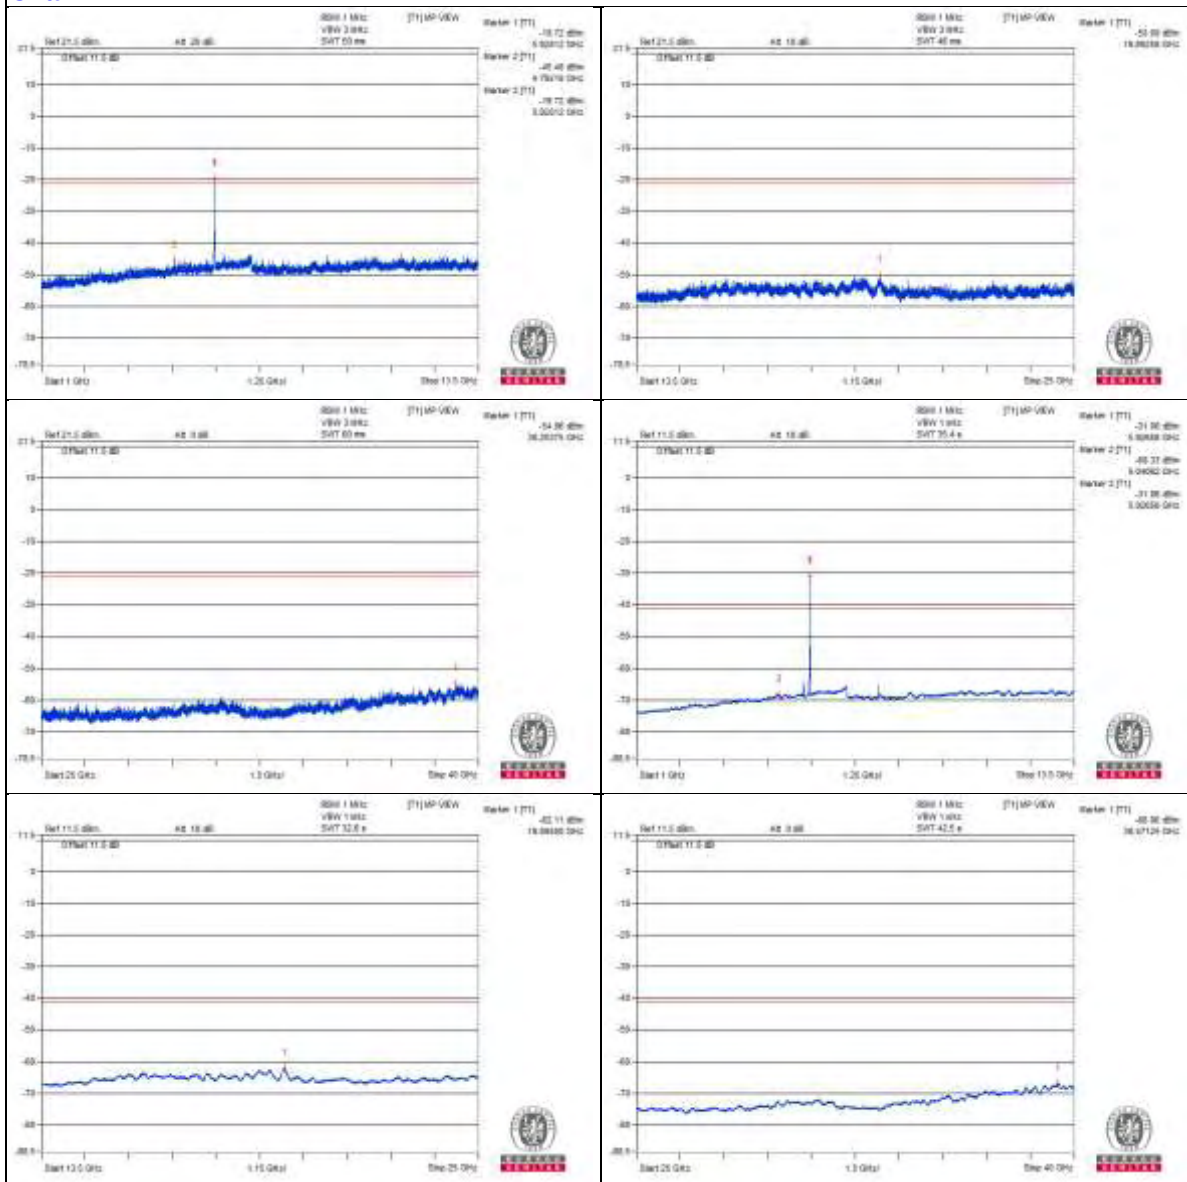

Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5924.97 PK	84.94	88.2	-3.26	-22.1	-20.94	8.15	-10.32
2	5925 AV	69.86	68.2	*1.66	-36.98	-36.17	8.15	-25.4


Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8


d = measurement distance in 3 meters.

* The unwanted emission was verified and the test result was passed by radiated measurement.
(Please refer APPENDIX B)

Chain 0

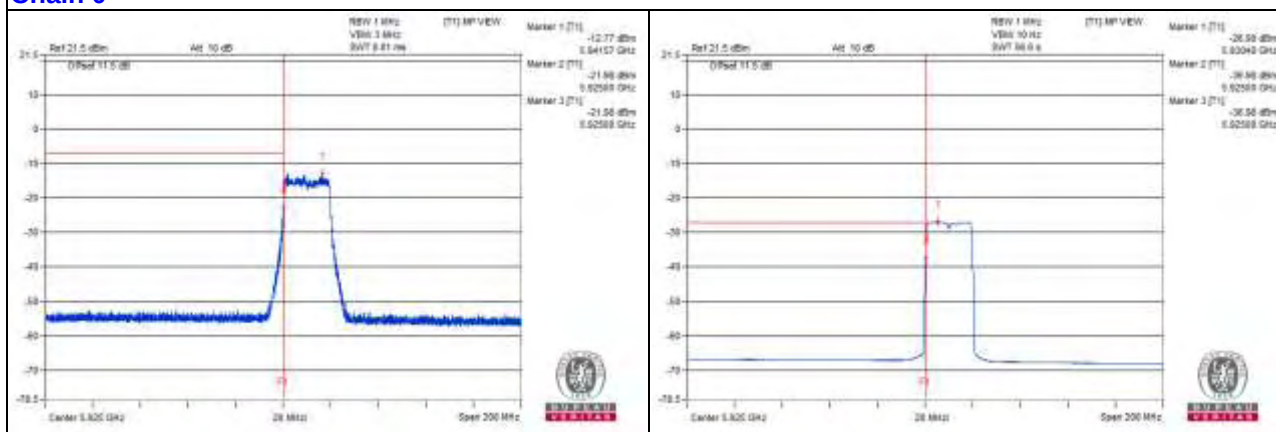

Chain 1

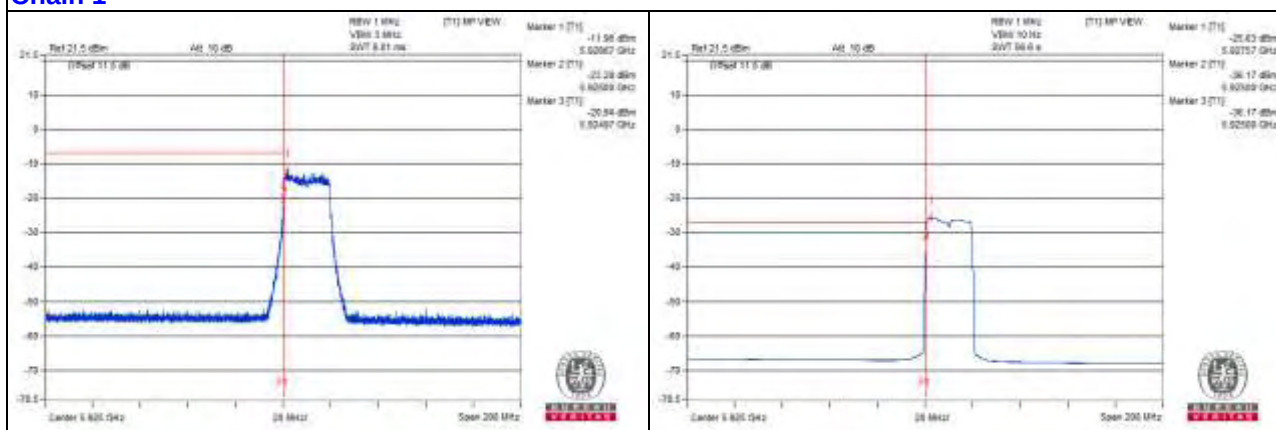

Channel 1

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	1746.87 PK	54.51	74	-19.49	-52.46	-51.46	8.17	-40.75
2	1750 AV	42.6	54	-11.4	-64.75	-63.09	8.17	-52.66
3	5485.93 PK	58.44	88.2	-29.76	-47.26	-48.89	8.17	-36.82
4	5482.81 AV	38.94	68.2	-29.26	-67.11	-67.94	8.17	-56.32
5	5759.37 PK	61.44	88.2	-26.76	-45.7	-44.4	8.17	-33.82
6	5759.37 AV	55.39	68.2	-12.81	-51.77	-50.43	8.17	-39.87
7	7939.06 PK	59.09	88.2	-29.11	-46.8	-47.99	8.17	-36.17
8	7940.62 AV	44.59	68.2	-23.61	-60.34	-64.18	8.17	-50.67
9	11910.93 PK	60.53	74	-13.47	-47.31	-44.86	8.17	-34.73
10	11909.37 AV	40.49	54	-13.51	-67.73	-64.69	8.17	-54.77
11	17867.12 PK	53.82	74	-20.18	-52.05	-53.28	8.17	-41.44
12	17864.25 AV	42.65	54	-11.35	-63.61	-63.98	8.17	-52.61

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

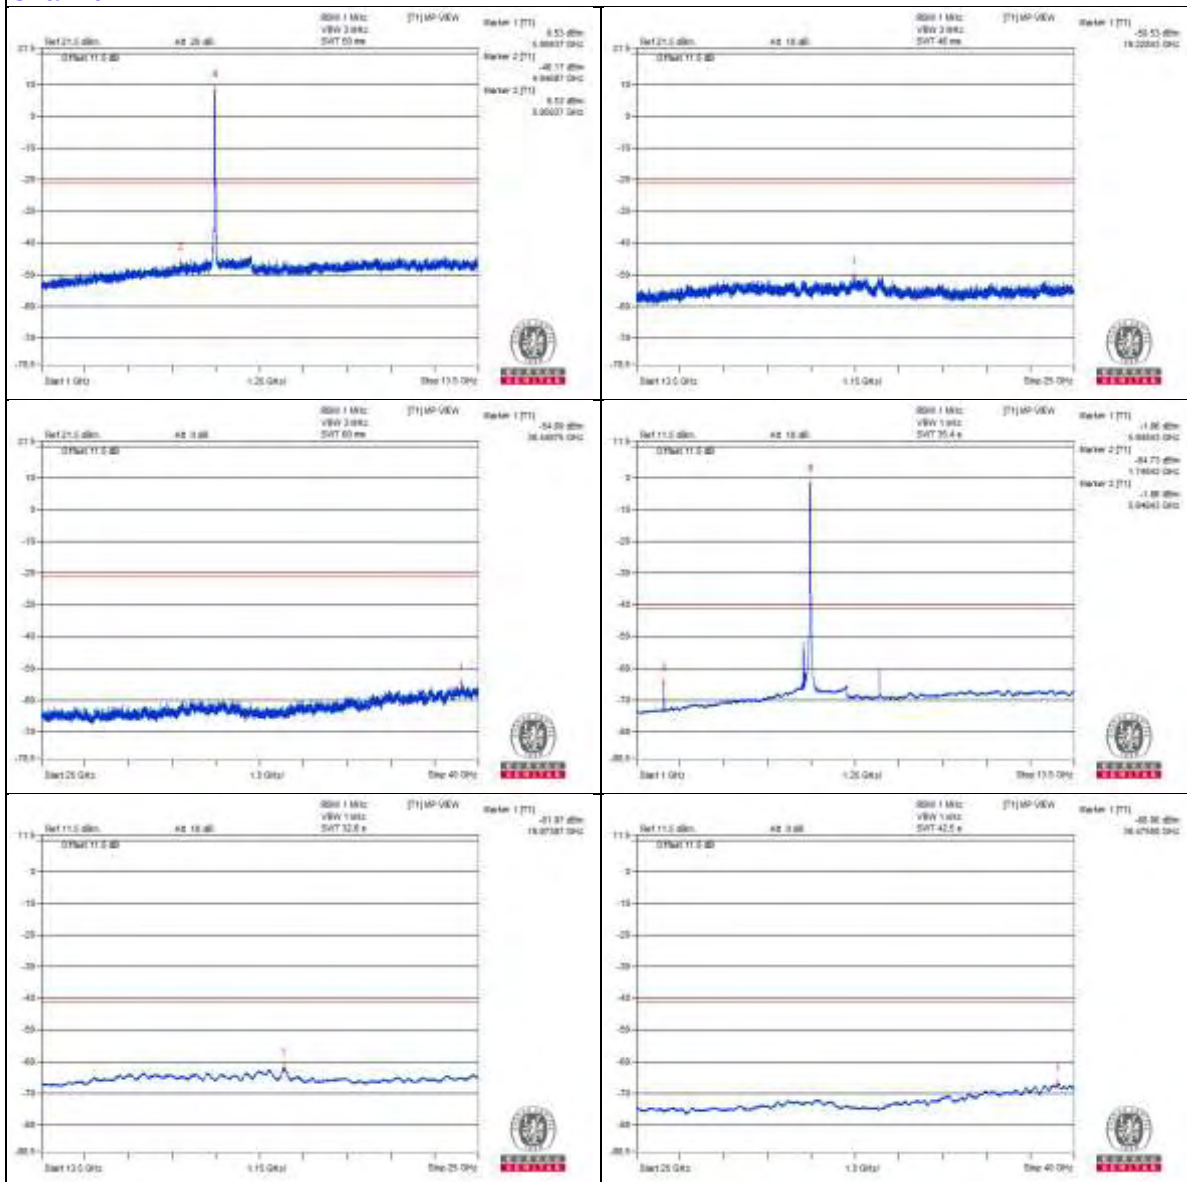

Chain 1

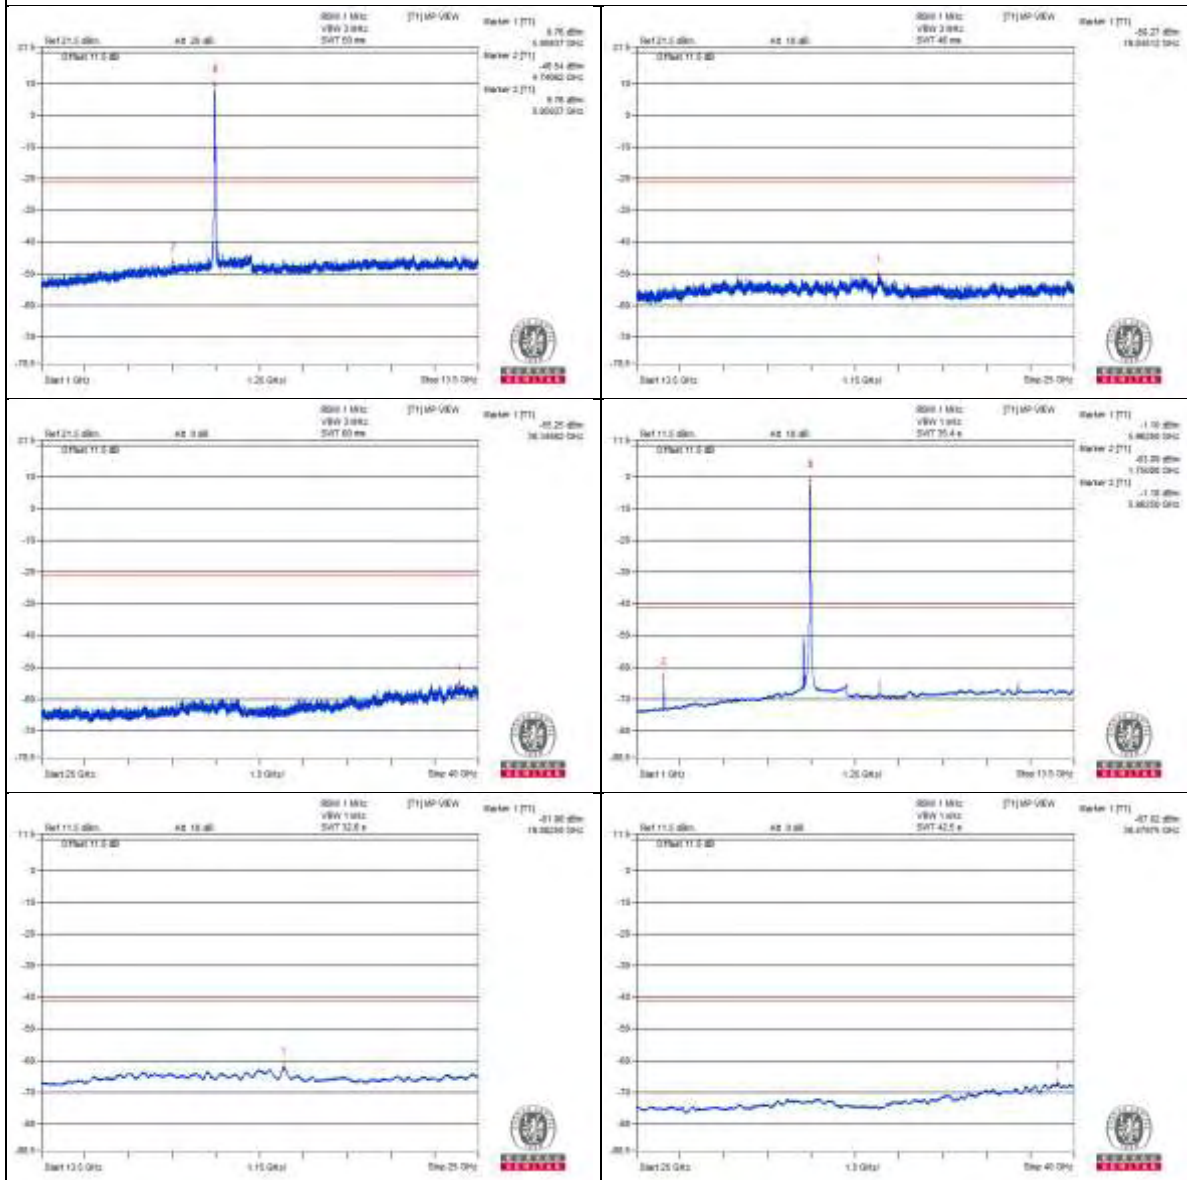

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5922.32 PK	76.58	88.2	-11.62	-32.83	-28.08	8.15	-18.68
2	5925 AV	61.01	68.2	-7.19	-46.86	-44.33	8.15	-34.25

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

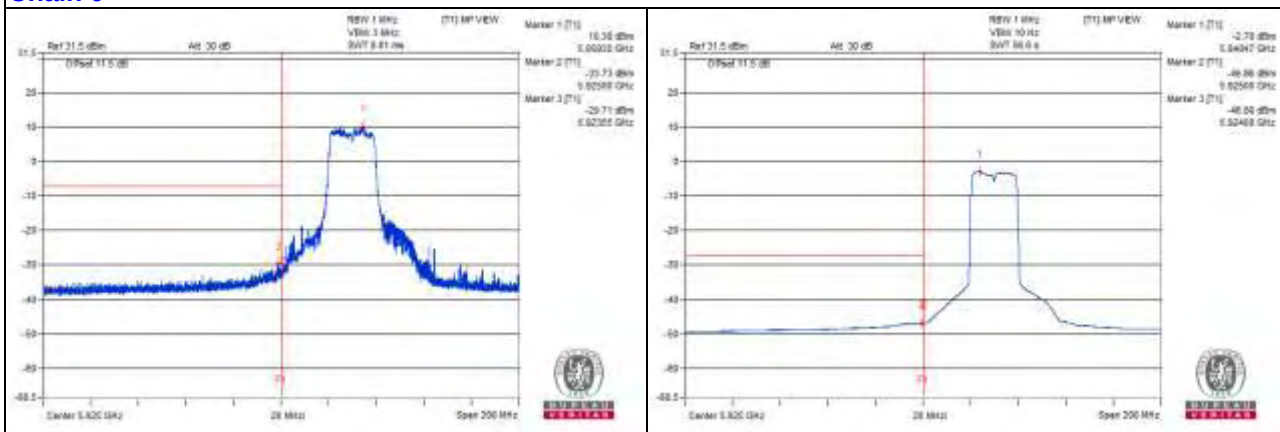

Chain 1

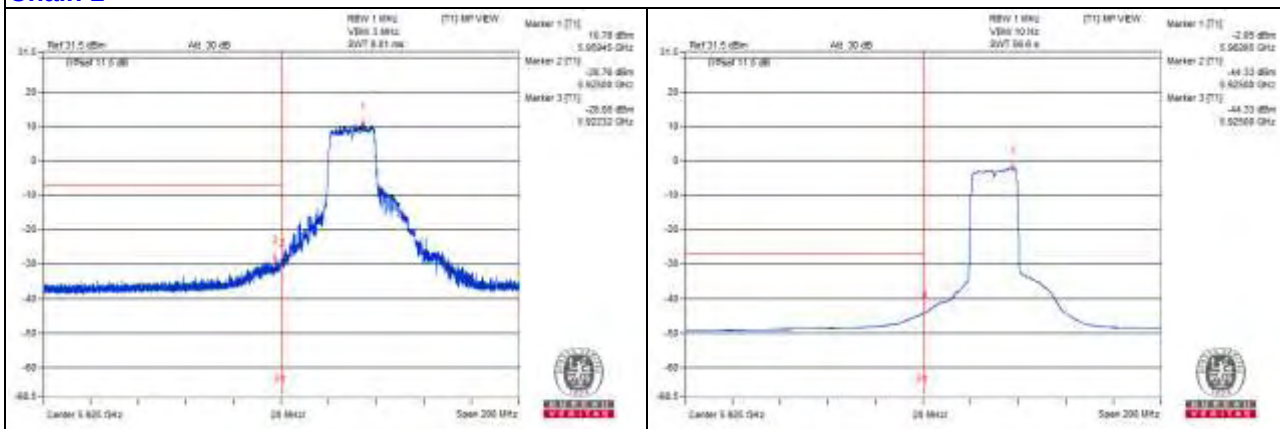

Channel 45

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	1965.62 PK	55.14	74	-18.86	-52.27	-50.5	8.17	-40.12
2	1968.75 AV	43.4	54	-10.6	-63.28	-62.81	8.17	-51.86
3	5484.37 PK	59.51	88.2	-28.69	-47.22	-46.65	8.17	-35.75
4	5487.5 AV	39.3	68.2	-28.9	-66.65	-67.69	8.17	-55.96
5	5759.37 PK	63.34	88.2	-24.86	-42.54	-43.75	8.17	-31.92
6	5759.37 AV	58.79	68.2	-9.41	-46.24	-49.76	8.17	-36.47
7	8232.81 PK	58.21	74	-15.79	-47.75	-48.78	8.17	-37.05
8	8232.81 AV	43.85	54	-10.15	-60.84	-65.55	8.17	-51.41
9	12345.31 PK	61.13	74	-12.87	-44.12	-46.97	8.17	-34.13
10	12350 AV	41.05	54	-12.95	-65.97	-64.88	8.17	-54.21
11	18528.37 PK	53.07	74	-20.93	-53.76	-53.01	8.17	-42.19
12	18529.81 AV	42.12	54	-11.88	-64.48	-64.17	8.17	-53.14

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

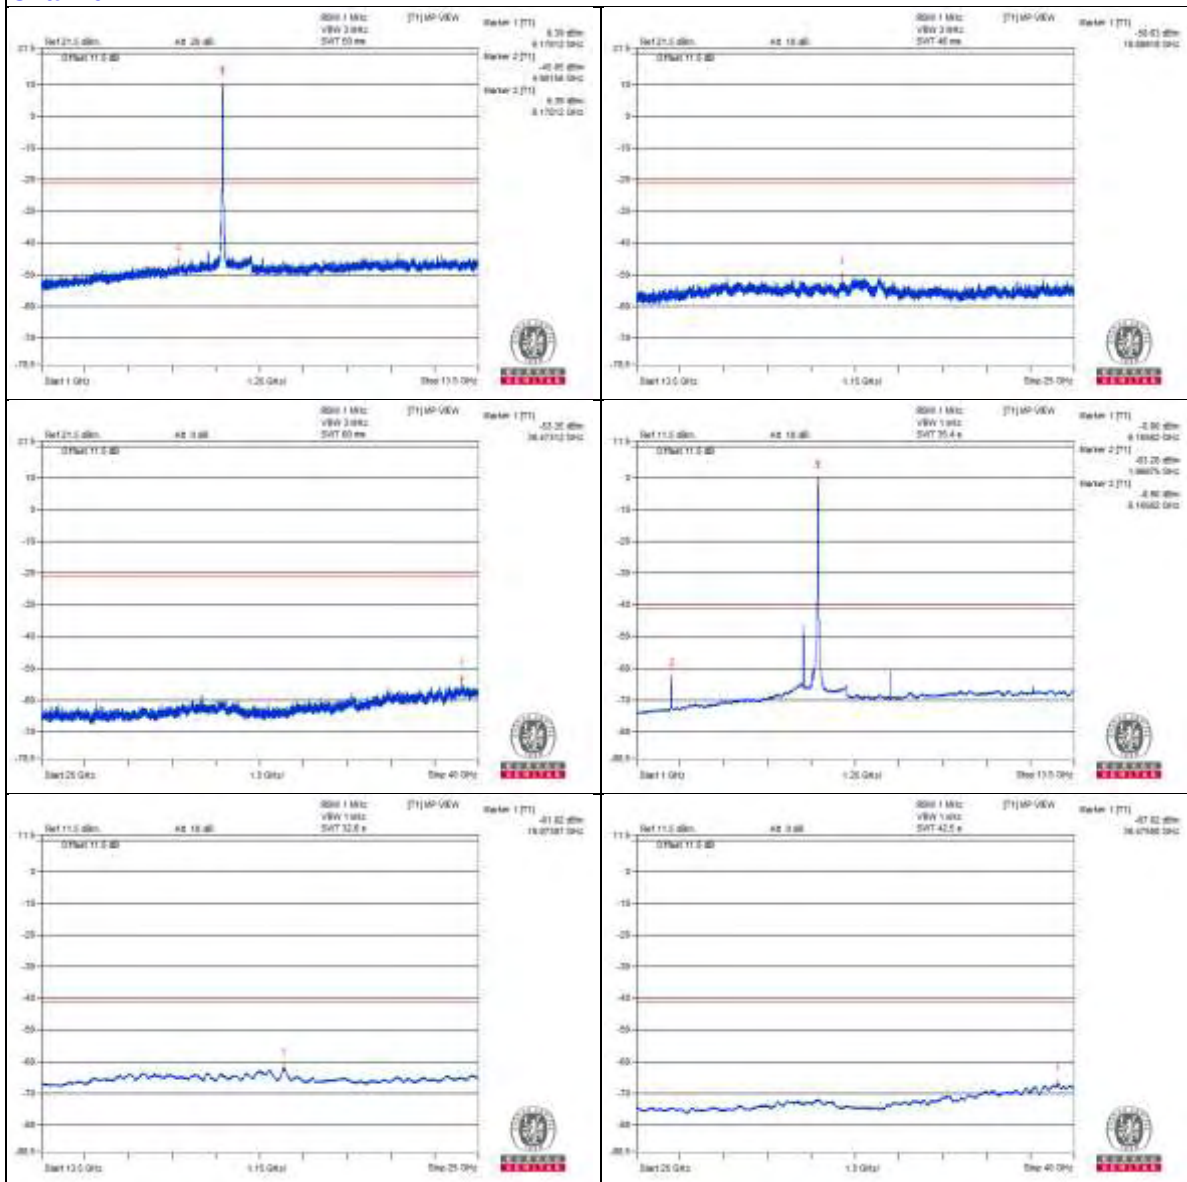

Chain 1

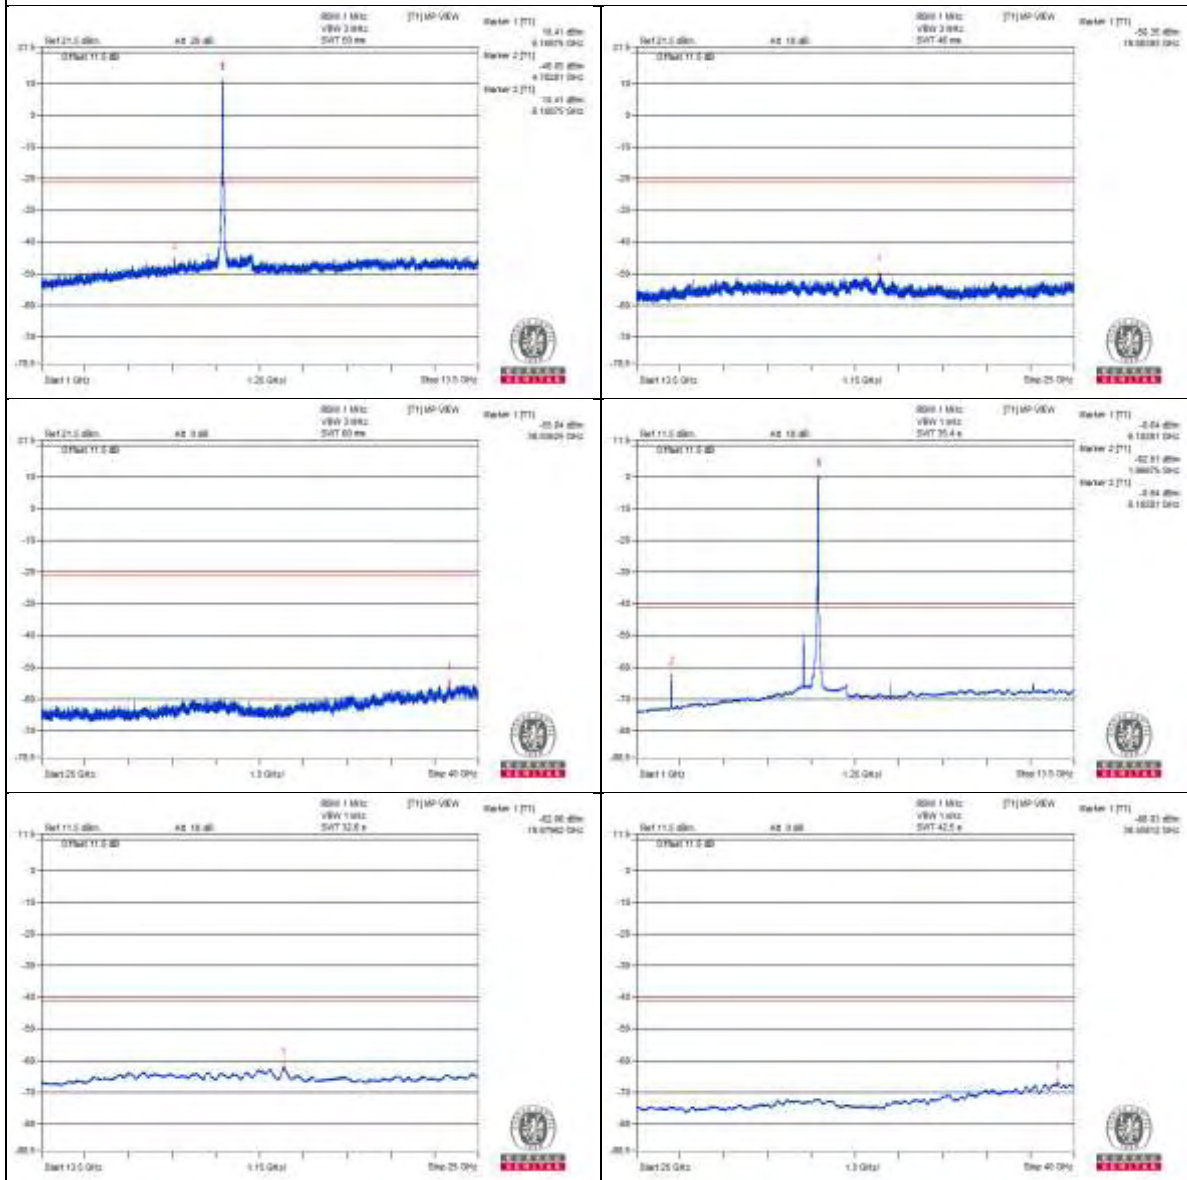

Channel 93

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	2210.93 PK	54.6	74	-19.4	-51.74	-51.95	8.17	-40.66
2	2209.37 AV	43.54	54	-10.46	-62.38	-63.5	8.17	-51.72
3	5485.93 PK	59.14	88.2	-29.06	-48	-46.7	8.17	-36.12
4	5487.5 AV	38.23	68.2	-29.97	-68.15	-68.27	8.17	-57.03
5	5759.37 PK	60.27	88.2	-27.93	-47.23	-45.32	8.17	-34.99
6	5759.37 AV	53.83	68.2	-14.37	-55.5	-50.89	8.17	-41.43
7	8553.12 PK	58.66	88.2	-29.54	-47.3	-48.33	8.17	-36.6
8	8553.12 AV	43.87	68.2	-24.33	-60.12	-68.77	8.17	-51.39
9	12828.12 PK	60.95	88.2	-27.25	-45.15	-45.86	8.17	-34.31
10	12832.81 AV	41.06	68.2	-27.14	-66.8	-64.31	8.17	-54.2
11	19241.37 PK	54.8	74	-19.2	-51.99	-51.31	8.17	-40.46
12	19244.25 AV	43.45	54	-10.55	-63.01	-62.98	8.17	-51.81

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

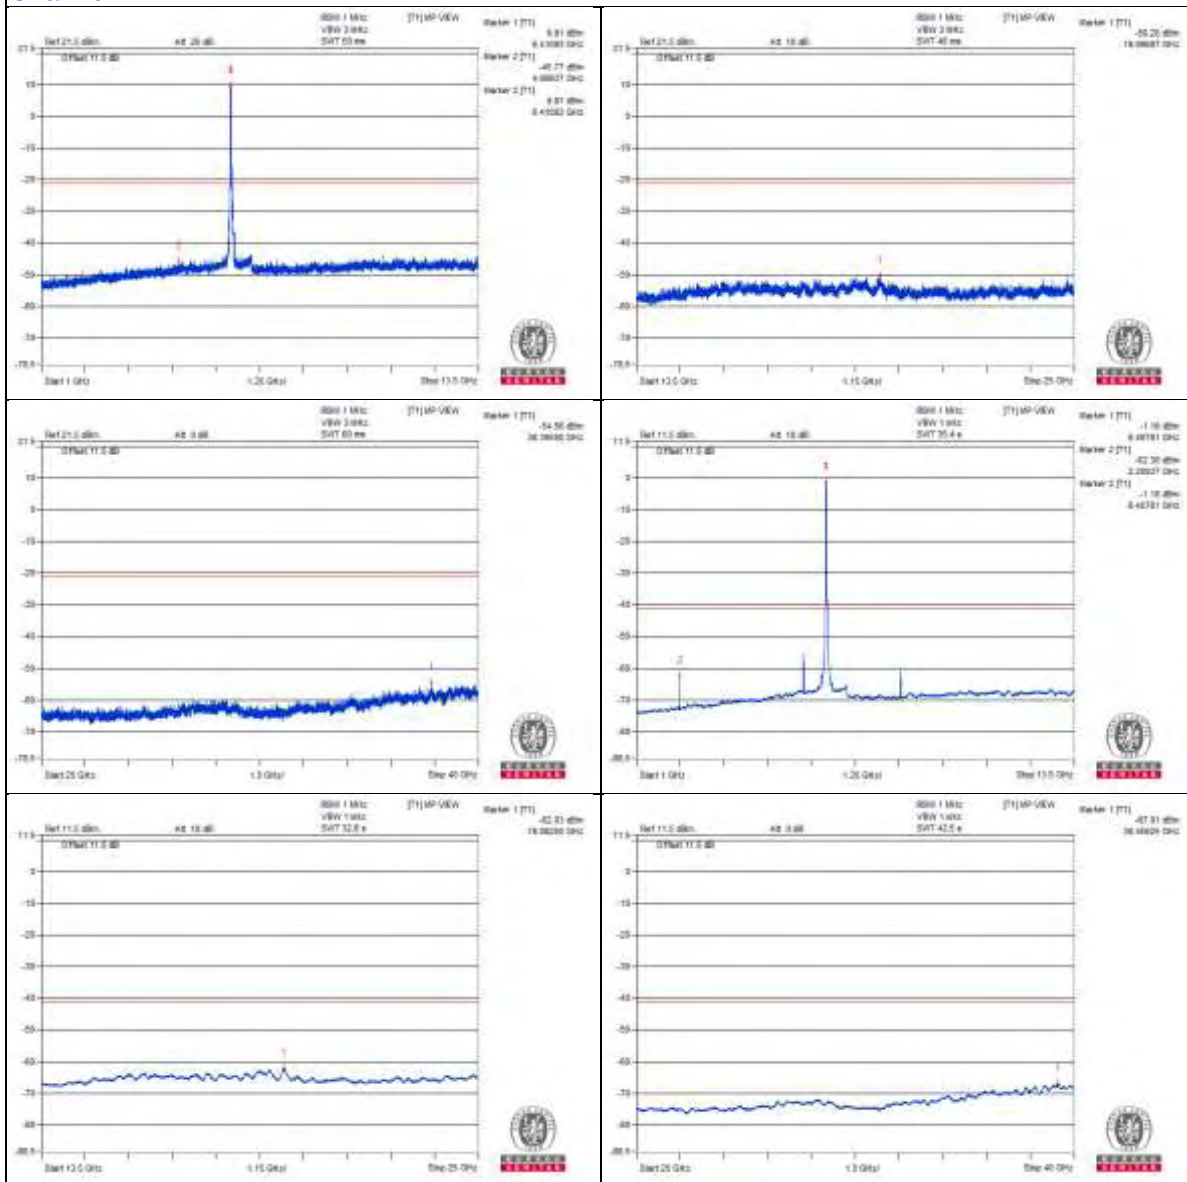

Chain 1

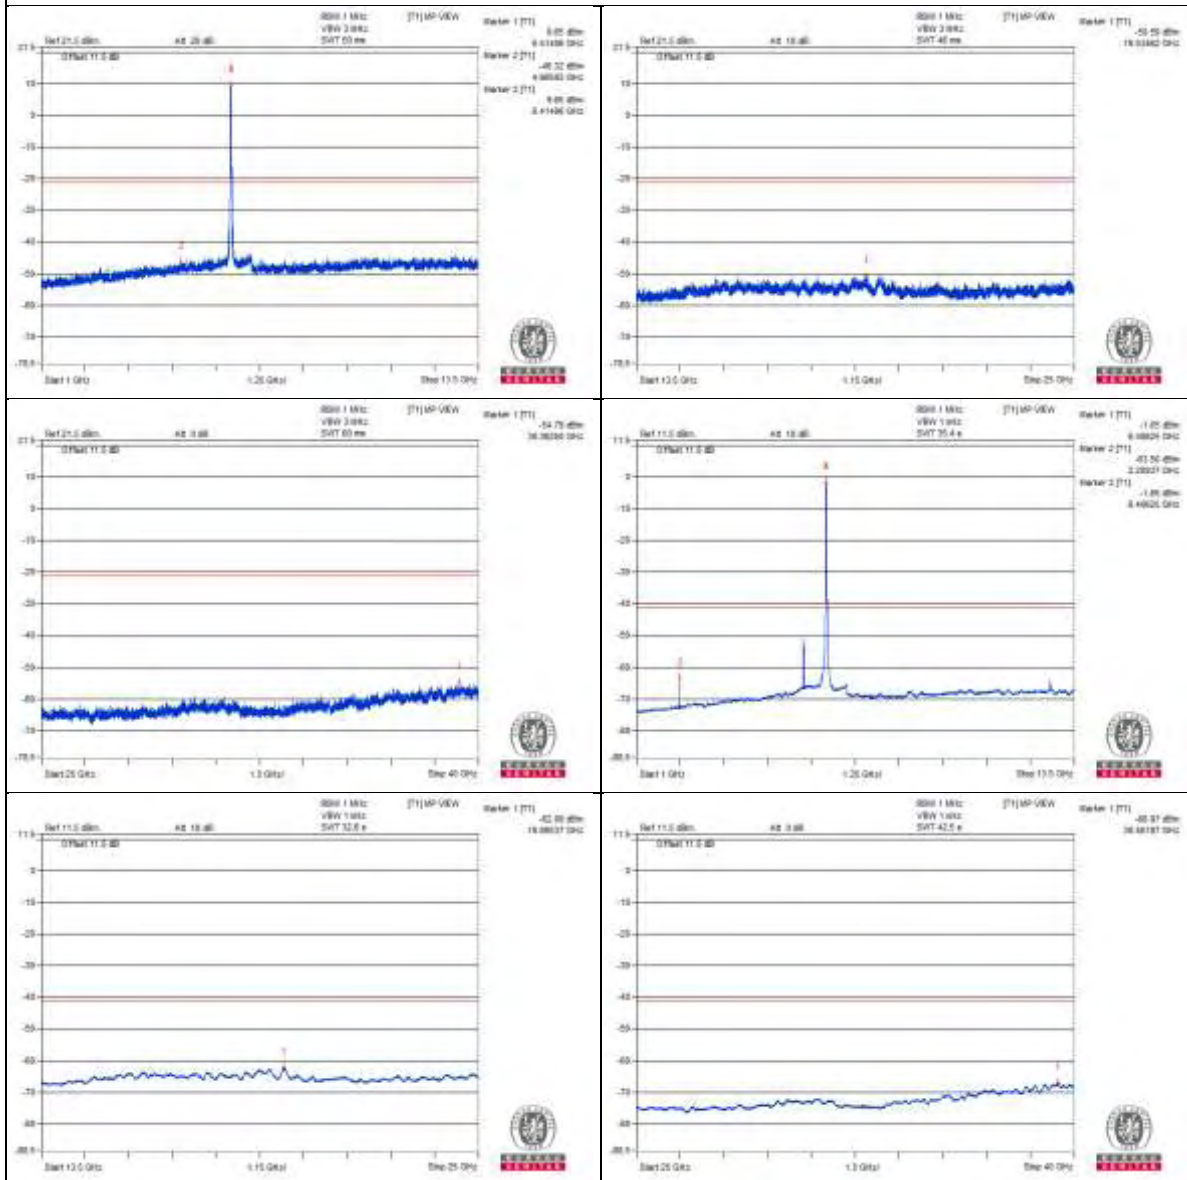

Channel 117

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	2328.12 PK	56.69	74	-17.31	-49.85	-49.66	8.17	-38.57
2	2329.68 AV	44.05	54	-9.95	-62.36	-62.43	8.17	-51.21
3	5485.93 PK	59.09	88.2	-29.11	-46.32	-48.7	8.17	-36.17
4	5485.93 AV	38.32	68.2	-29.88	-68.31	-67.94	8.17	-56.94
5	5759.37 PK	61.22	88.2	-26.98	-46.97	-43.97	8.17	-34.04
6	5759.37 AV	54.31	68.2	-13.89	-54.61	-50.56	8.17	-40.95
7	8714.06 PK	58.17	88.2	-30.03	-47.74	-48.87	8.17	-37.09
8	8714.06 AV	45.15	68.2	-23.05	-58.7	-68.67	8.17	-50.11
9	13067.18 PK	60.42	88.2	-27.78	-45.86	-46.18	8.17	-34.84
10	13071.87 AV	40.81	68.2	-27.39	-67.12	-64.52	8.17	-54.45
11	19602.18 PK	52.33	74	-21.67	-54.61	-53.66	8.17	-42.93
12	19605.06 AV	41.95	54	-12.05	-64.51	-64.48	8.17	-53.31

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

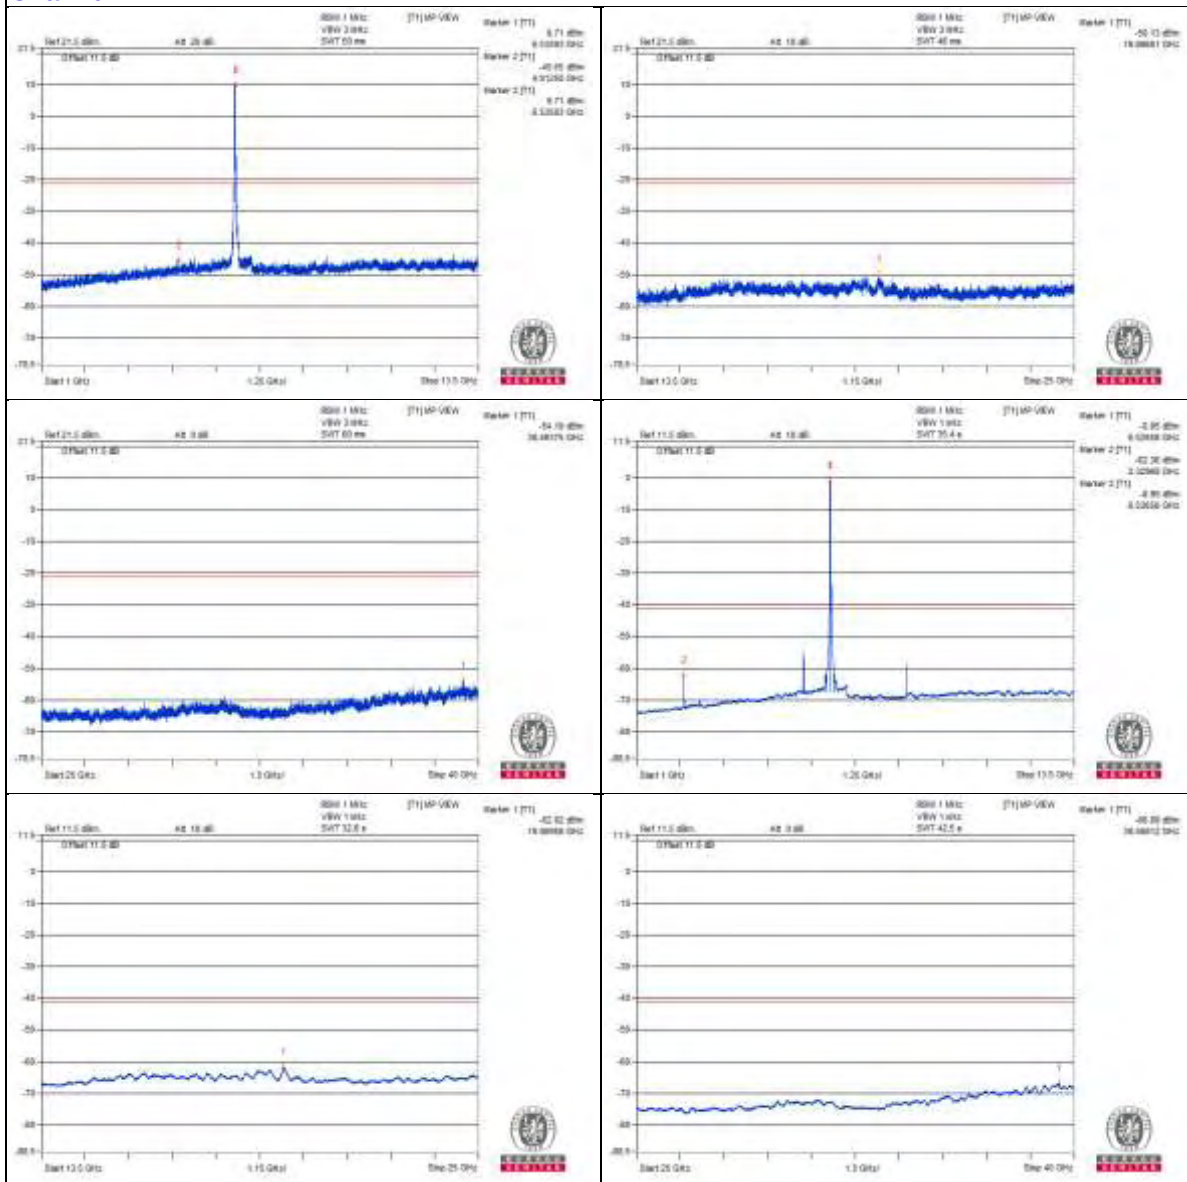

Chain 1

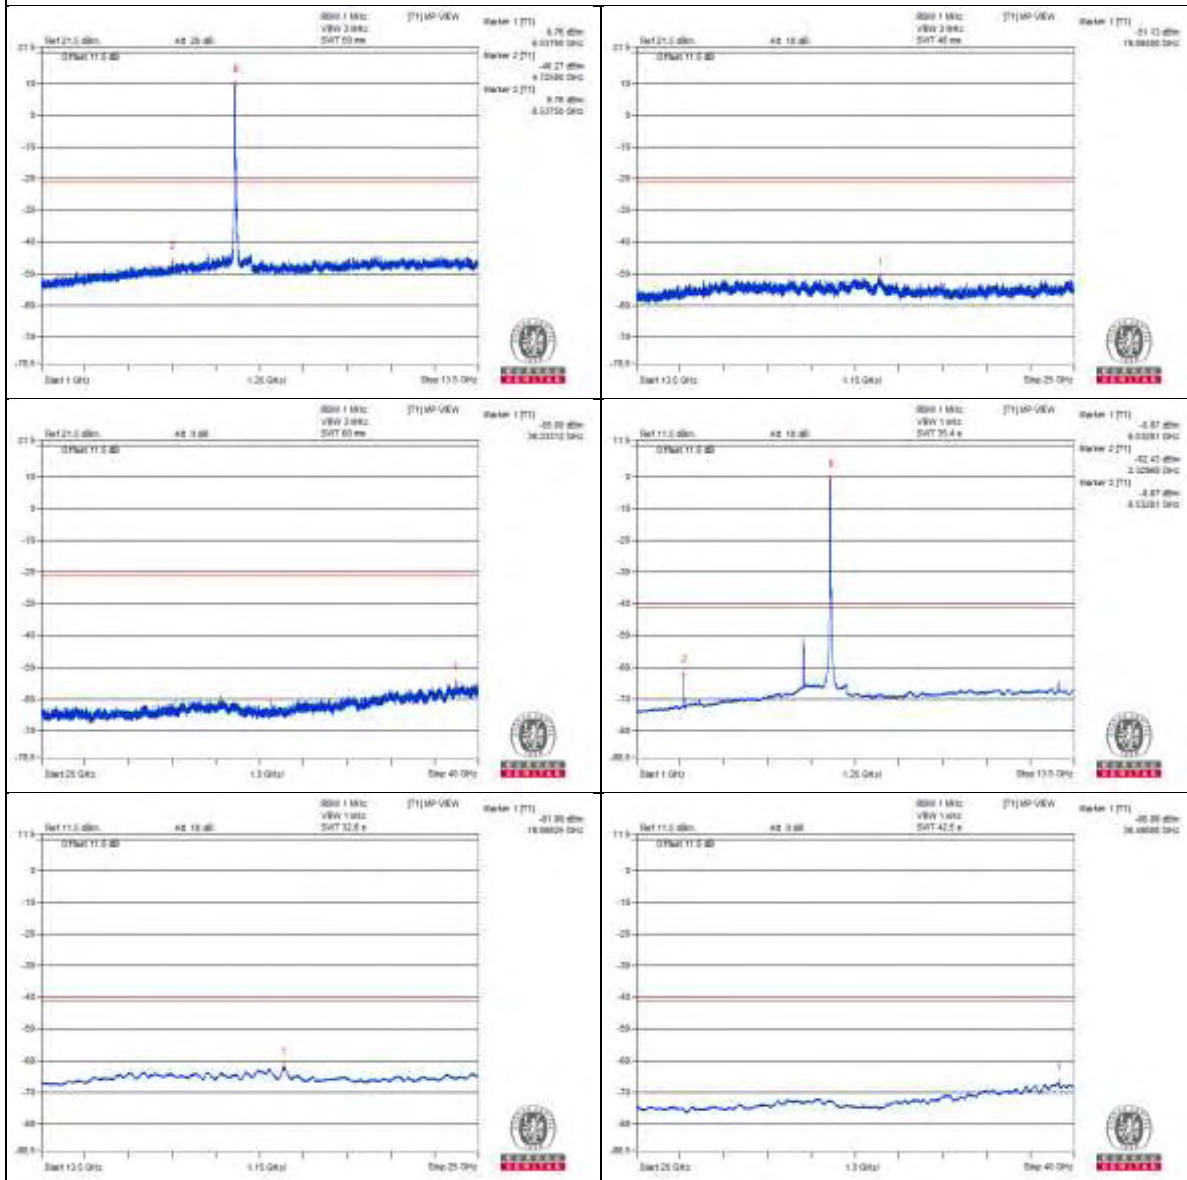

Channel 149

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	2487.5 PK	56.19	74	-17.81	-49.61	-51	8.17	-39.07
2	2489.06 AV	44.76	54	-9.24	-62.2	-61.21	8.17	-50.5
3	5479.68 PK	58.4	88.2	-29.8	-48.7	-47.46	8.17	-36.86
4	5487.5 AV	38.09	68.2	-30.11	-68.07	-68.65	8.17	-57.17
5	5759.37 PK	61.43	88.2	-26.77	-45.07	-44.96	8.17	-33.83
6	5759.37 AV	54.89	68.2	-13.31	-52.38	-50.85	8.17	-40.37
7	8926.56 PK	59.03	88.2	-29.17	-46.25	-48.99	8.17	-36.23
8	8926.56 AV	41.21	68.2	-26.99	-63.27	-68.91	8.17	-54.05
9	13390.62 PK	59.28	74	-14.72	-47.09	-47.23	8.17	-35.98
10	13390.62 AV	39.2	54	-14.8	-68.03	-66.58	8.17	-56.06
11	20086.62 PK	51.72	74	-22.28	-55.34	-54.17	8.17	-43.54
12	20082.31 AV	40.6	54	-13.4	-65.75	-65.93	8.17	-54.66

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

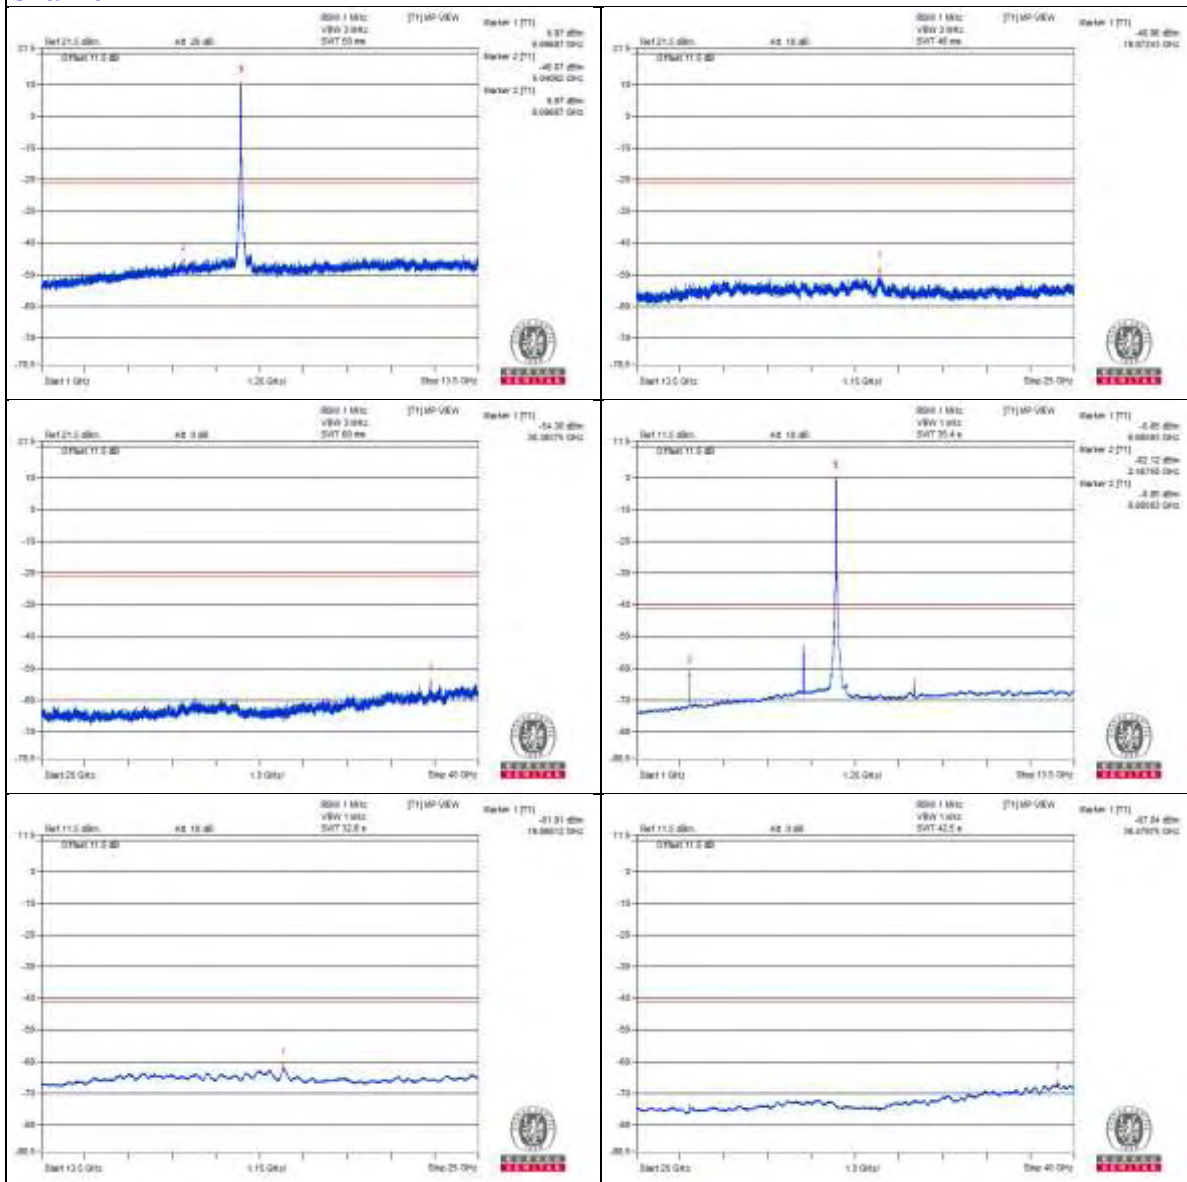

Chain 1

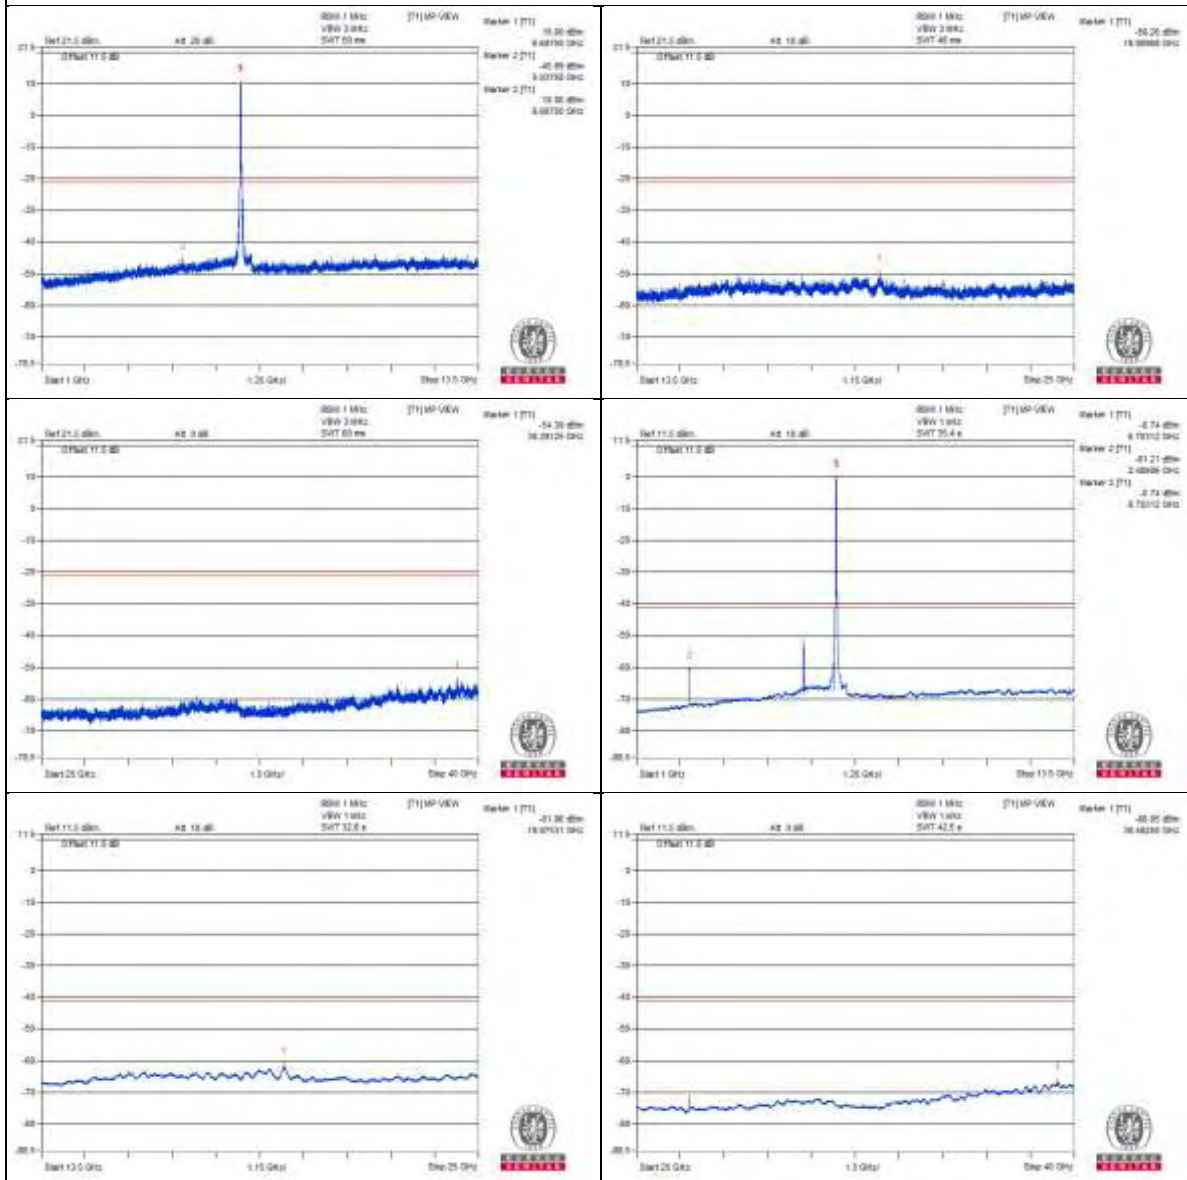

Channel 181

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	2646.87 PK	56.04	74	-17.96	-50.25	-50.56	8.17	-39.22
2	2648.43 AV	40.49	54	-13.51	-66.29	-65.64	8.17	-54.77
3	5484.37 PK	63.93	88.2	-24.27	-41.23	-44.34	8.17	-31.33
4	5484.37 AV	56.4	68.2	-11.8	-47.39	-58	8.17	-38.86
5	5759.37 PK	61.13	88.2	-27.07	-45.16	-45.46	8.17	-34.13
6	5759.37 AV	55.1	68.2	-13.1	-52.21	-50.61	8.17	-40.16
7	9142.18 PK	59.28	74	-14.72	-47.32	-47	8.17	-35.98
8	9142.18 AV	38.13	54	-15.87	-68.38	-68.24	8.17	-57.13
9	13707 PK	53.41	88.2	-34.79	-54.92	-51.72	8.17	-41.85
10	13709.87 AV	42.62	68.2	-25.58	-66.12	-62.32	8.17	-52.64
11	20569.62 PK	51.39	74	-22.61	-54.9	-55.2	8.17	-43.87
12	20563.87 AV	40.58	54	-13.42	-65.78	-65.95	8.17	-54.68

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

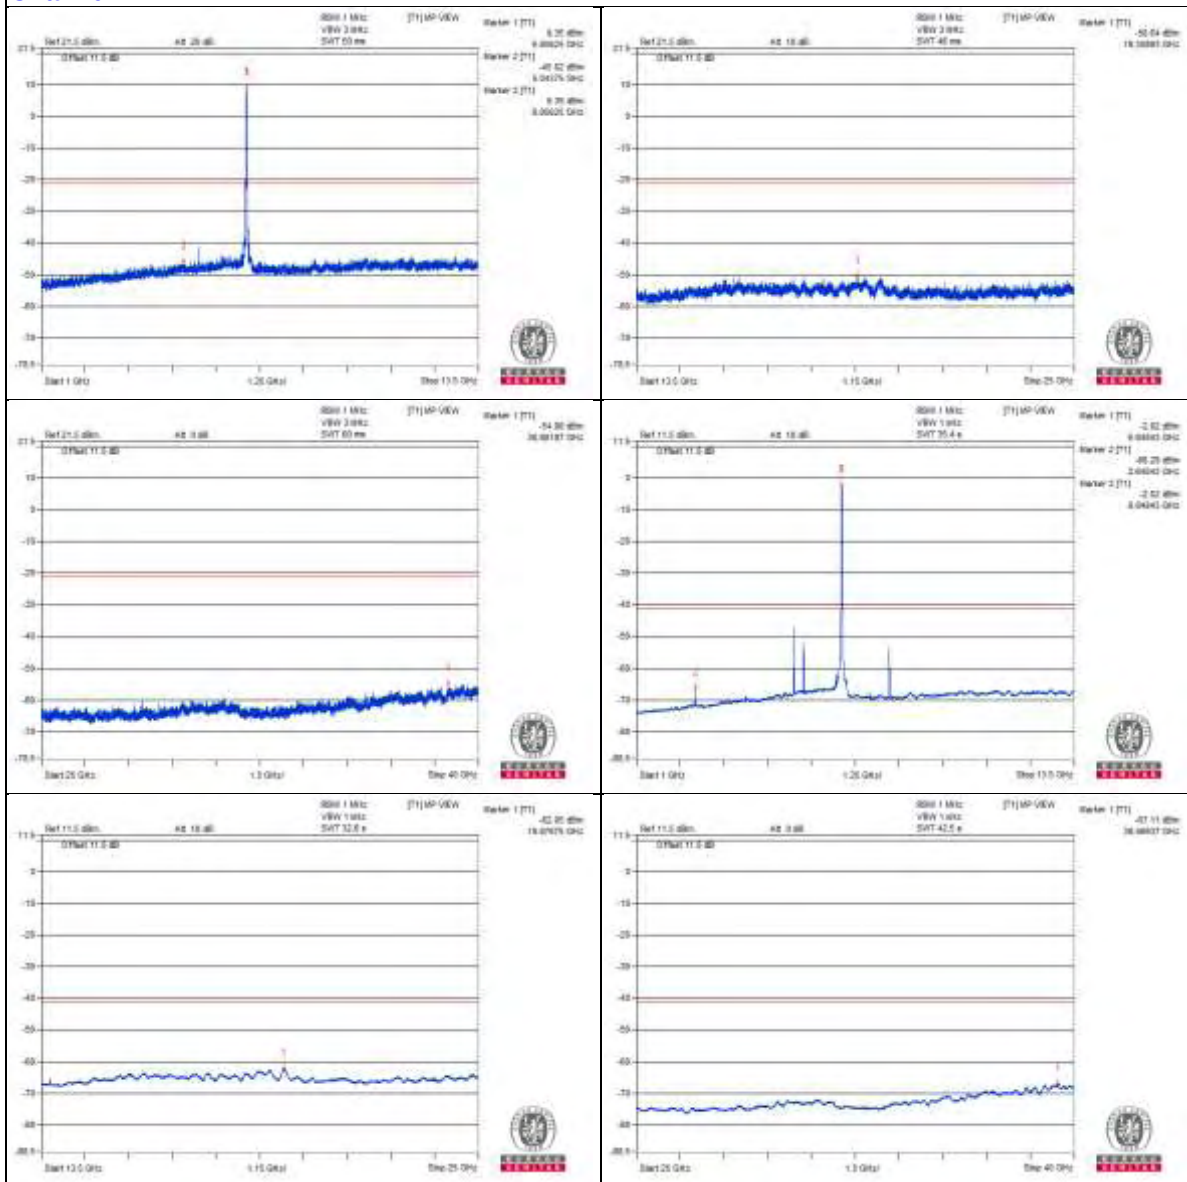

Chain 1

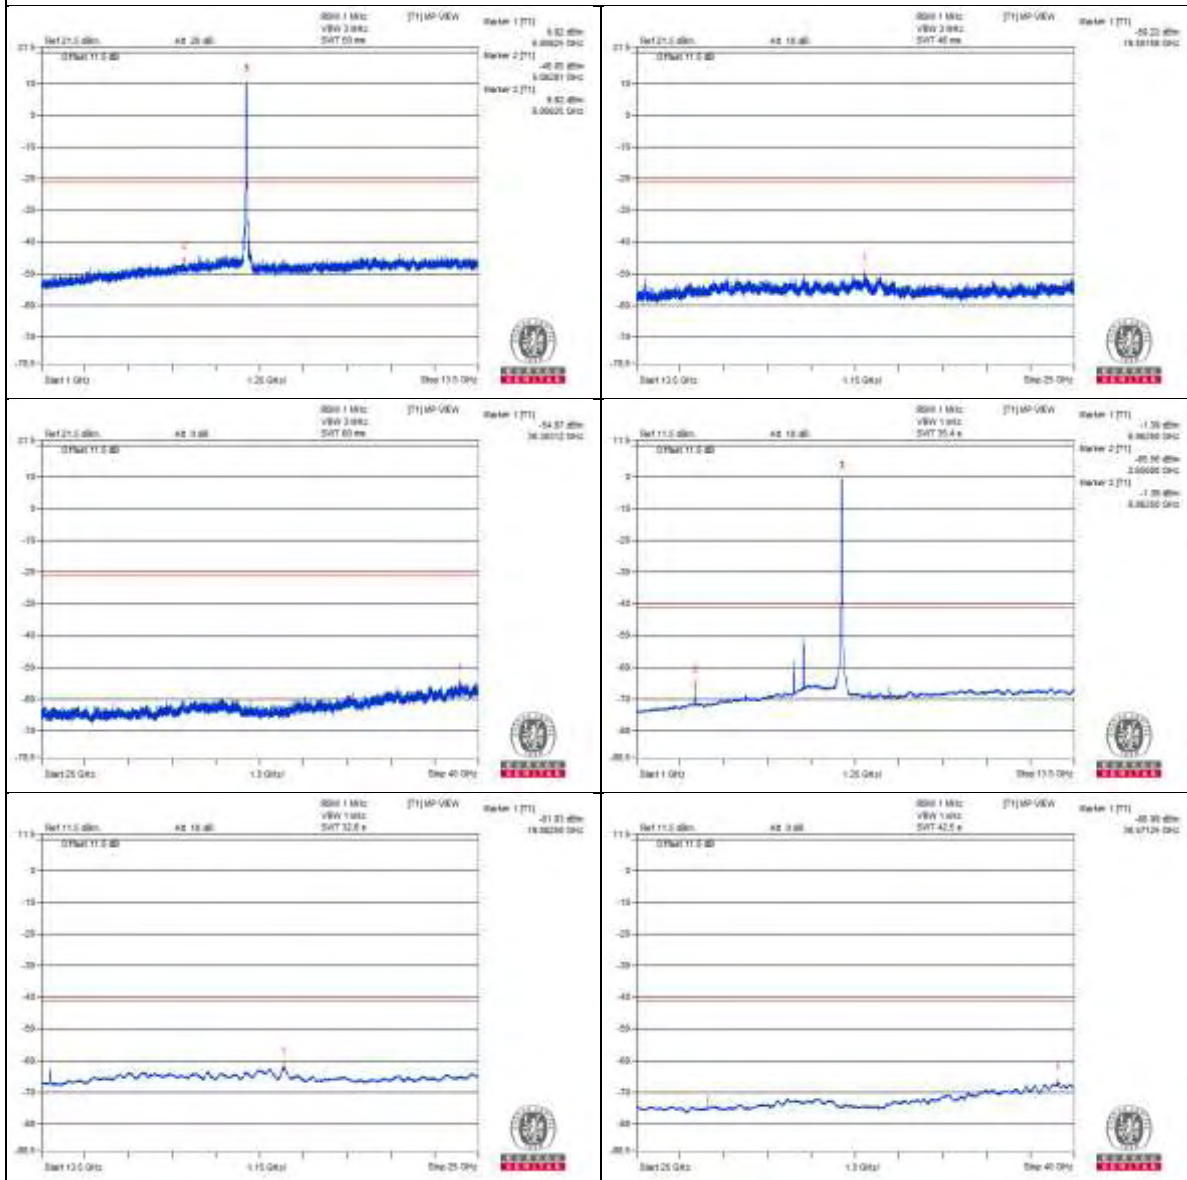

Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	7215.9 PK	59.65	88.2	-28.55	-45.64	-48.35	8.17	-35.61
2	7209.6 AV	47.04	68.2	-21.16	-59.42	-59.39	8.17	-48.22


Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8


d = measurement distance in 3 meters.

* The unwanted emission was verified and the test result was passed by radiated measurement.

Chain 0

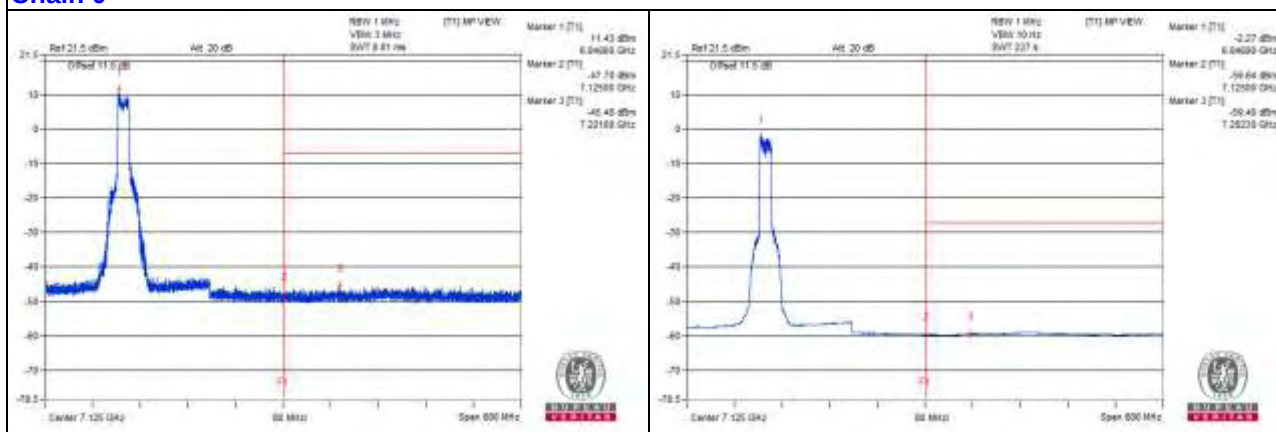

Chain 1

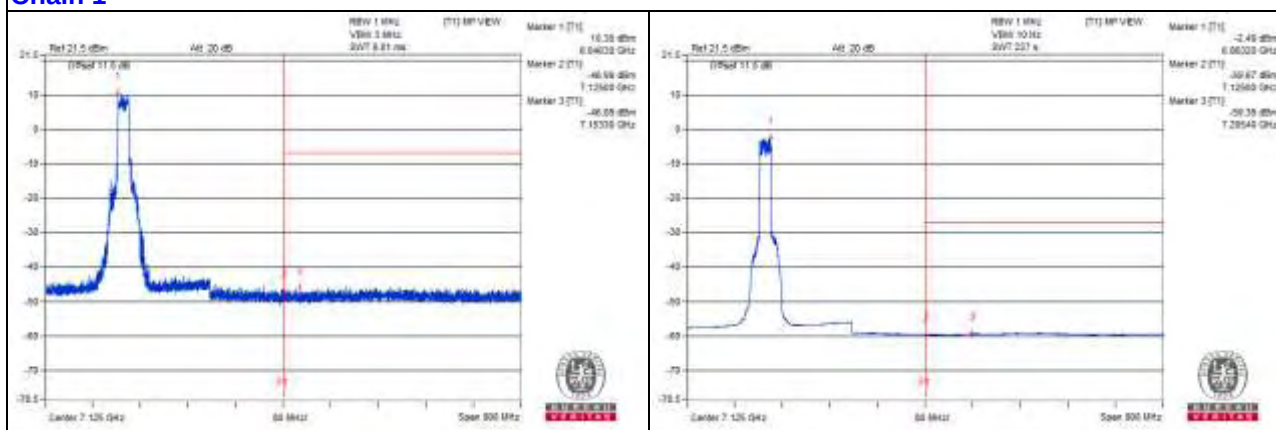

40MHz Preamble

RU26

Channel 3

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	1760.93 PK	54.98	74	-19.02	-51.05	-51.91	8.17	-40.28
2	1760.93 AV	41.28	54	-12.72	-65.34	-64.98	8.17	-53.98
3	5487.5 PK	59.28	88.2	-28.92	-48.18	-46.34	8.17	-35.98
4	5485.93 AV	39.88	68.2	-28.32	-67.1	-66.08	8.17	-55.38
5	5759.37 PK	62.94	88.2	-25.26	-42.6	-44.64	8.17	-32.32
6	5759.37 AV	56.96	68.2	-11.24	-48.79	-50.3	8.17	-38.3
7	7953.12 PK	60.17	88.2	-28.03	-46.92	-45.7	8.17	-35.09
8	7953.12 AV	46.12	68.2	-22.08	-63.17	-58.61	8.17	-49.14
9	11931.25 PK	60.35	74	-13.65	-45.86	-46.33	8.17	-34.91
10	11932.81 AV	41.5	54	-12.5	-63.85	-66.4	8.17	-53.76
11	17898.75 PK	53.55	74	-20.45	-53.85	-52.1	8.17	-41.71
12	17898.75 AV	43.22	54	-10.78	-63.21	-63.23	8.17	-52.04

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

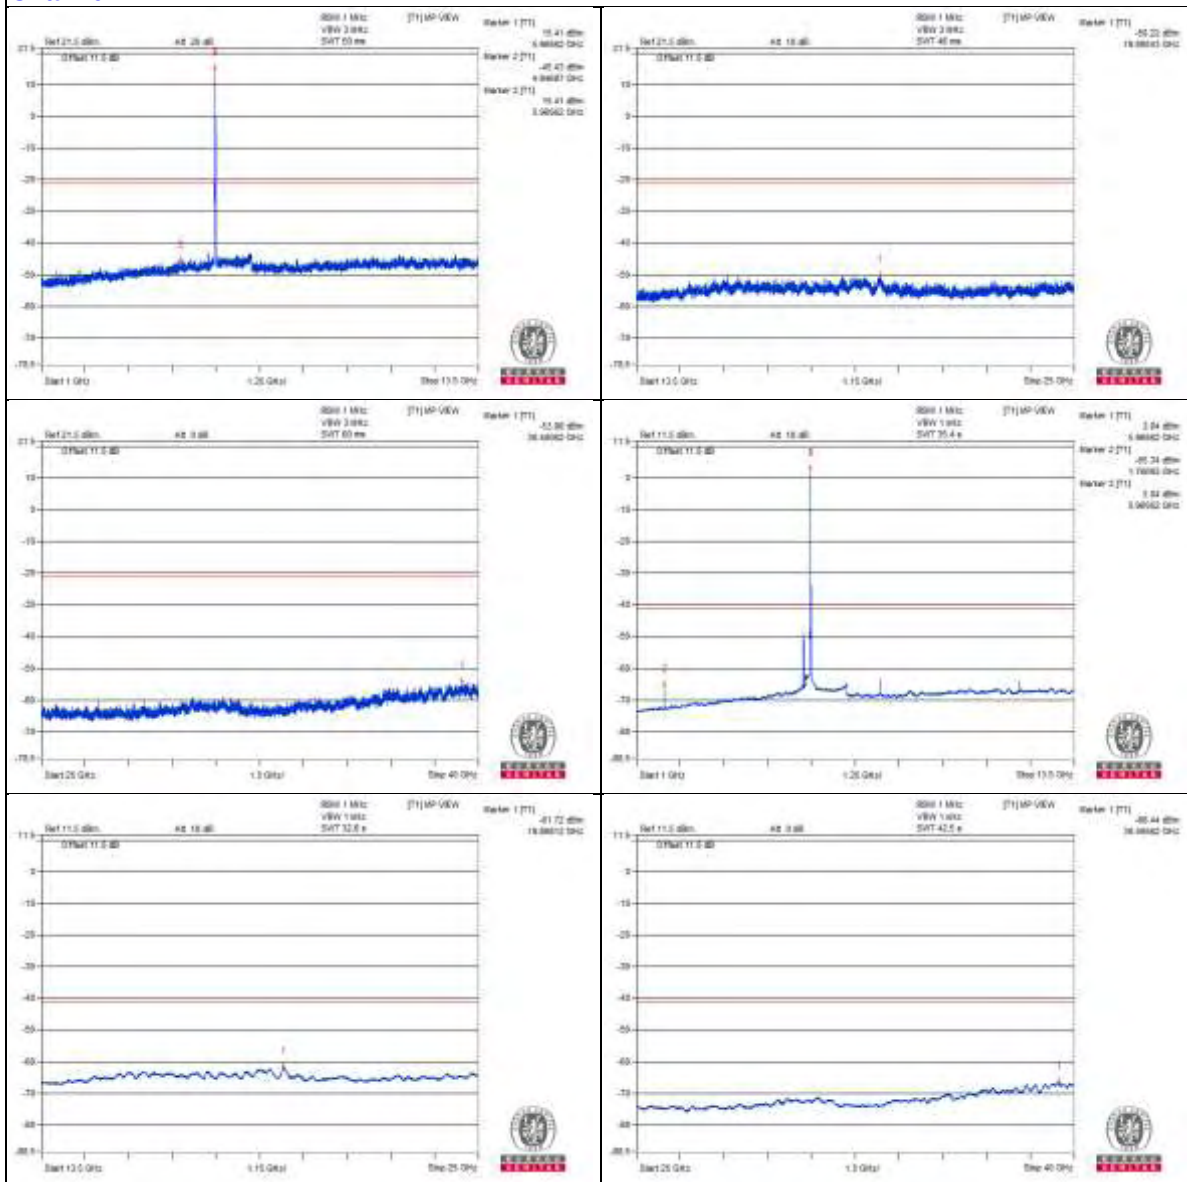

Chain 1

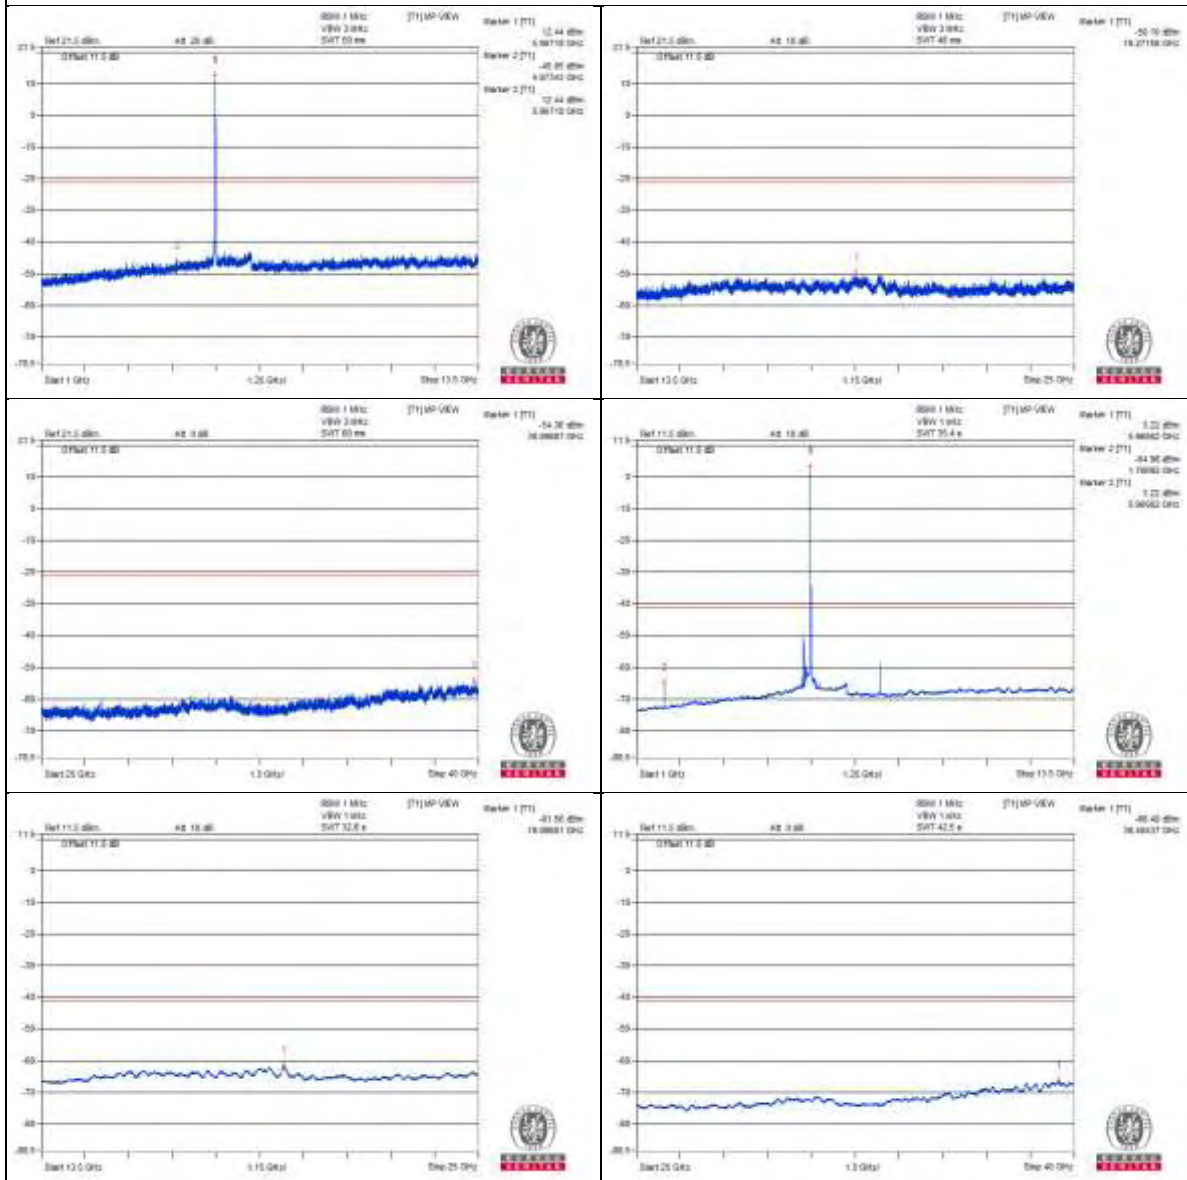

Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5898.25 PK	72.07	88.2	-16.13	-33.03	-36.25	8.15	-23.19
2	5889.57 AV	58.11	68.2	-10.09	-48.33	-48.29	8.15	-37.15


Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8


d = measurement distance in 3 meters.

* The unwanted emission was verified and the test result was passed by radiated measurement.

Chain 0

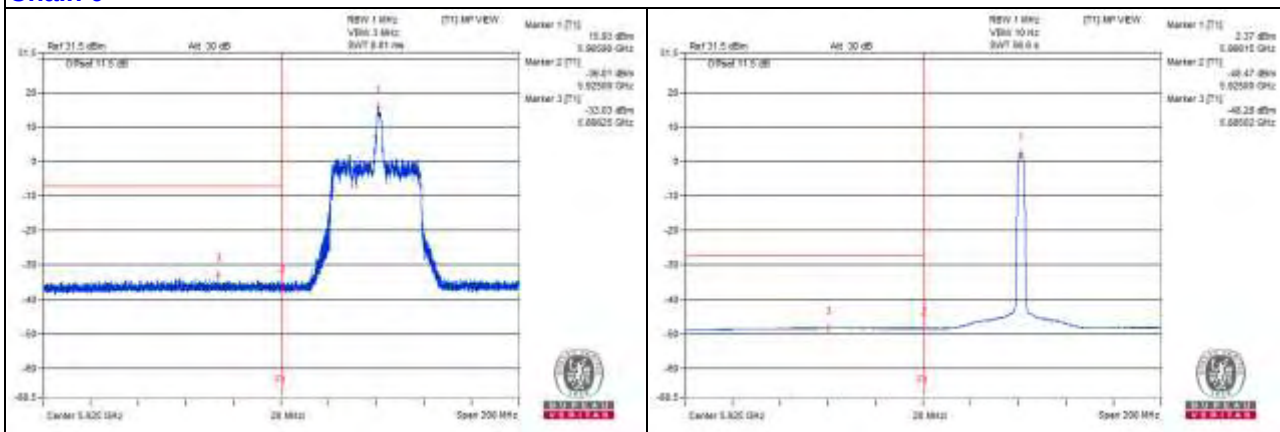

Chain 1

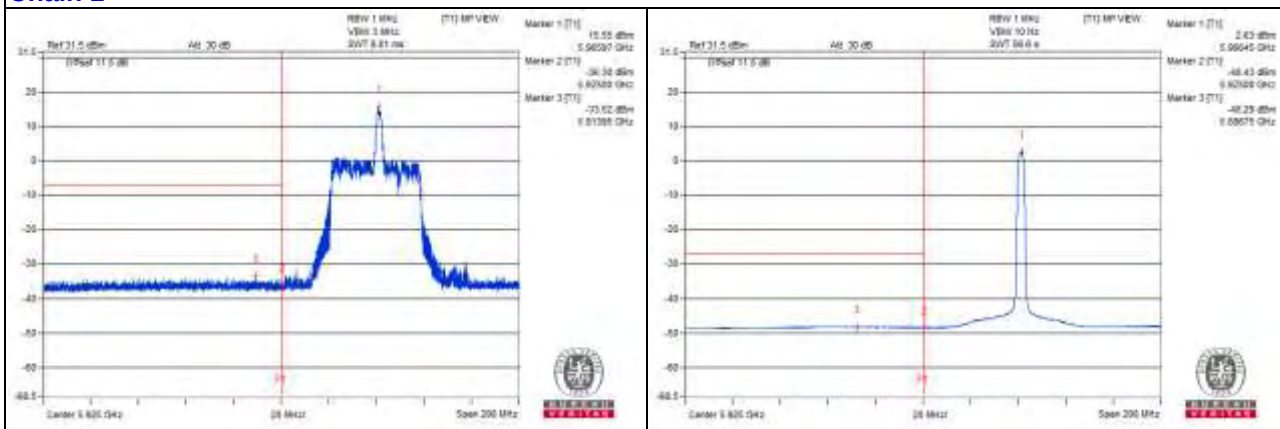

Channel 43

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	1957.81 PK	56.41	74	-17.59	-49.2	-51.05	8.17	-38.85
2	1957.81 AV	42.62	54	-11.38	-64.54	-63.21	8.17	-52.64
3	5481.25 PK	60.17	88.2	-28.03	-47.16	-45.53	8.17	-35.09
4	5484.37 AV	39.59	68.2	-28.61	-66.59	-67.12	8.17	-55.67
5	5759.37 PK	63.69	88.2	-24.51	-42.45	-43.08	8.17	-31.57
6	5759.37 AV	58.8	68.2	-9.4	-47.25	-48.06	8.17	-36.46
7	8225 PK	59.49	74	-14.51	-47.66	-46.34	8.17	-35.77
8	8220.31 AV	45.08	54	-8.92	-59.42	-64.94	8.17	-50.18
9	12331.25 PK	60.72	74	-13.28	-46.12	-45.35	8.17	-34.54
10	12328.12 AV	43.55	54	-10.45	-62.31	-63.56	8.17	-51.71
11	18498.18 PK	53.28	74	-20.72	-53.88	-52.55	8.17	-41.98
12	18495.31 AV	42.08	54	-11.92	-64.45	-64.27	8.17	-53.18

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

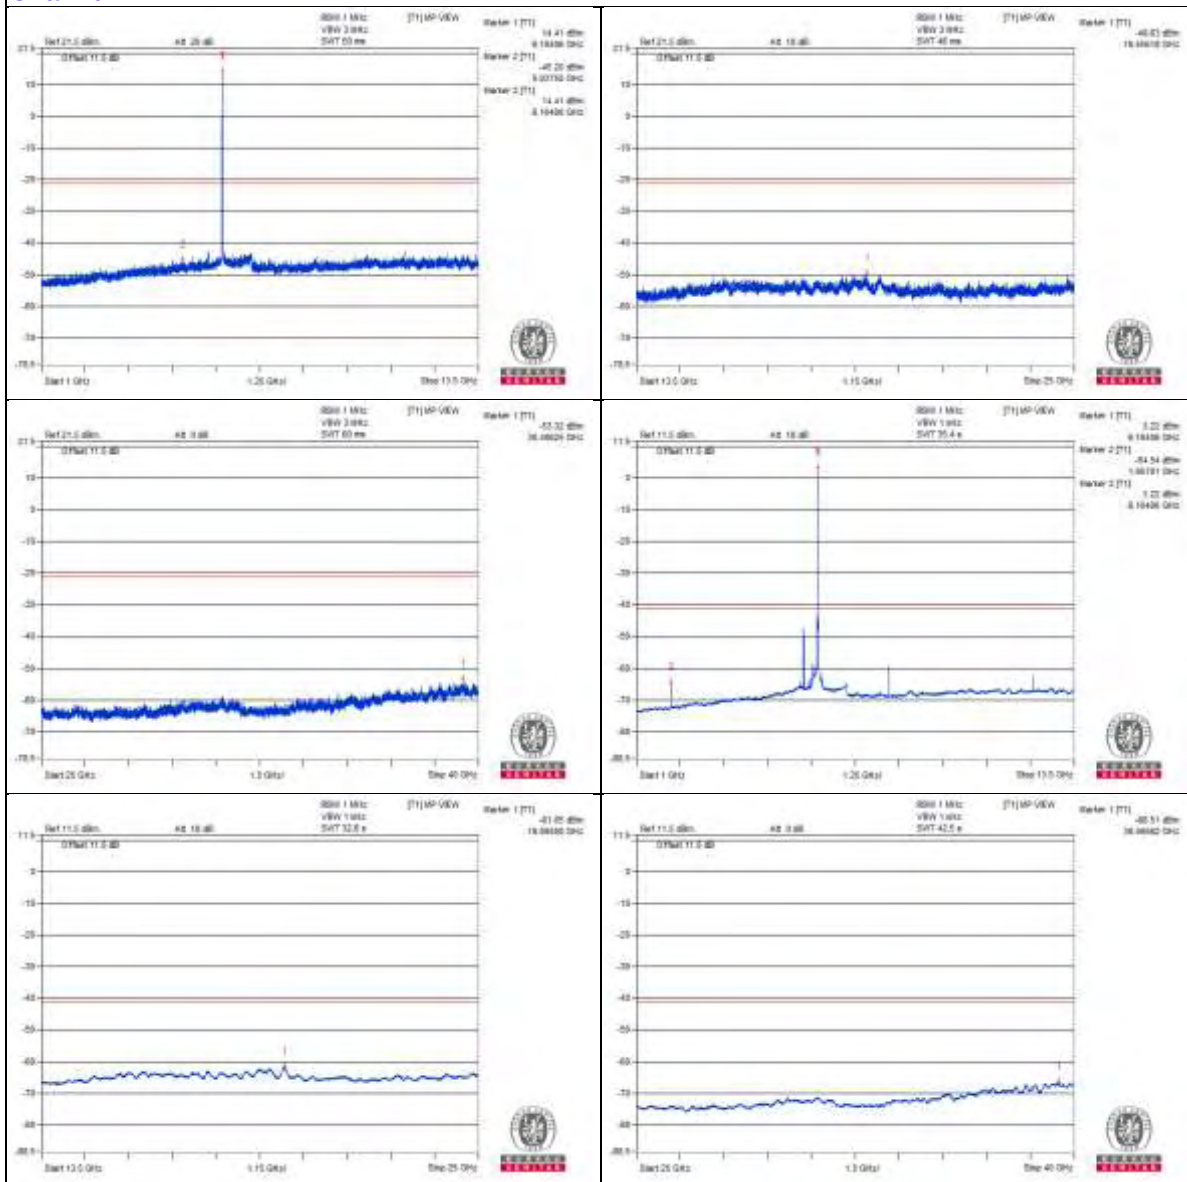

Chain 1

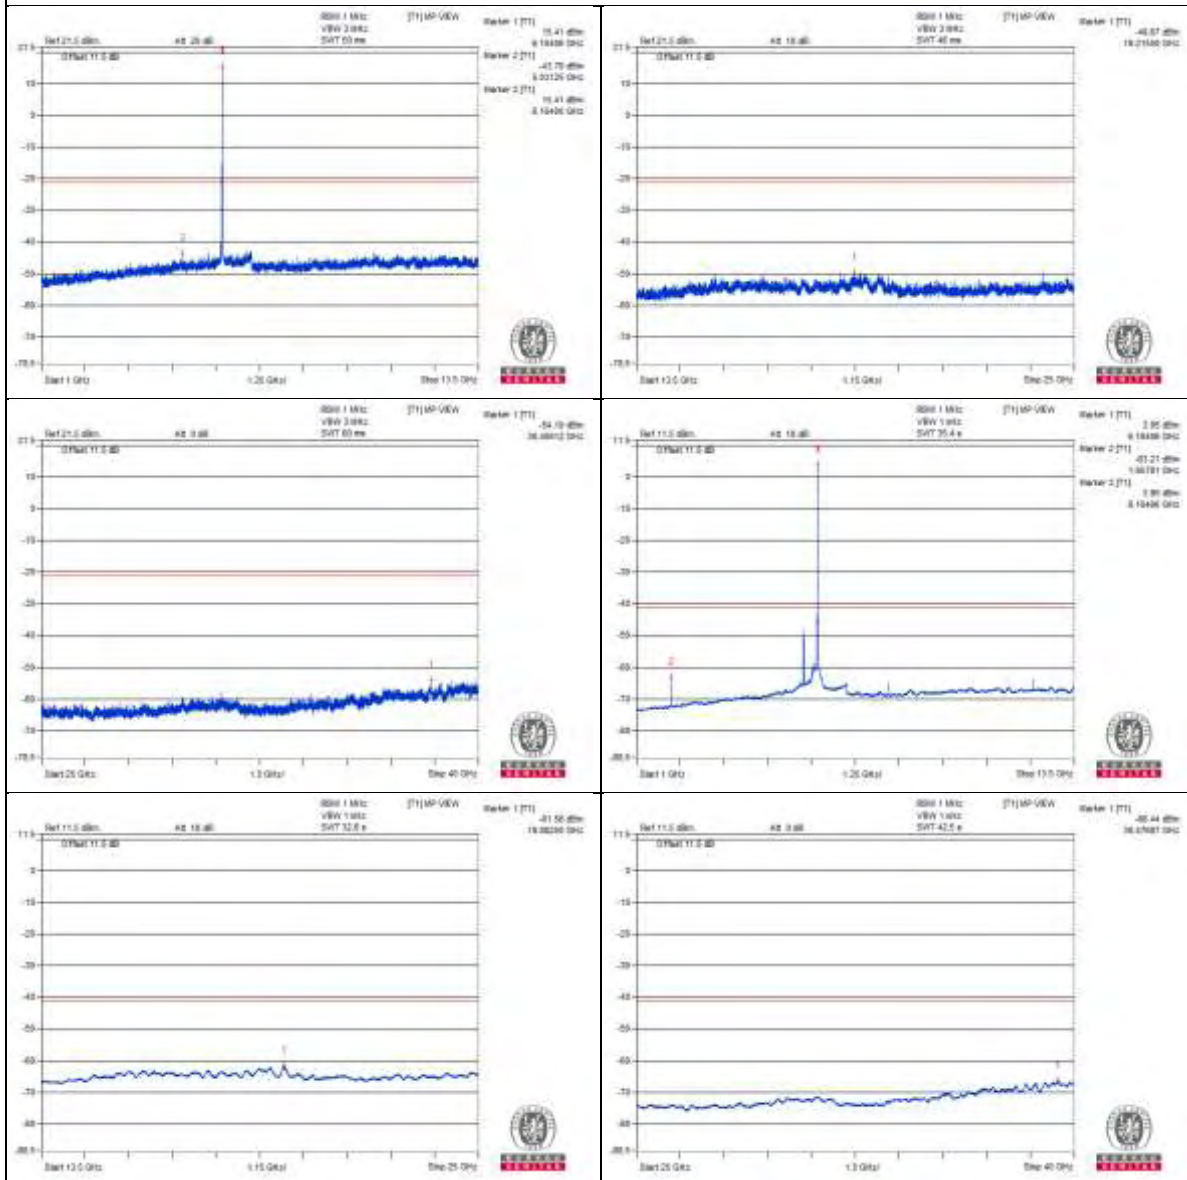

Channel 91

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	2196.87 PK	55.03	88.2	-33.17	-51.55	-51.28	8.17	-40.23
2	2198.43 AV	42.04	68.2	-26.16	-64.33	-64.47	8.17	-53.22
3	5482.81 PK	59.08	88.2	-29.12	-48.17	-46.68	8.17	-36.18
4	5485.93 AV	38.62	68.2	-29.58	-67.77	-67.88	8.17	-56.64
5	5759.37 PK	62.85	88.2	-25.35	-45.45	-42.29	8.17	-32.41
6	5759.37 AV	55.54	68.2	-12.66	-53.87	-49.15	8.17	-39.72
7	8535.93 PK	59.77	88.2	-28.43	-46.39	-46.98	8.17	-35.49
8	8540.62 AV	48.05	68.2	-20.15	-55.6	-68.52	8.17	-47.21
9	12809.37 PK	61.08	88.2	-27.12	-45.8	-44.96	8.17	-34.18
10	12807.81 AV	41.26	68.2	-26.94	-65.66	-64.75	8.17	-54
11	19218.37 PK	55.36	74	-18.64	-52.47	-50.03	8.17	-39.9
12	19219.81 AV	43.78	54	-10.22	-62.62	-62.7	8.17	-51.48

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

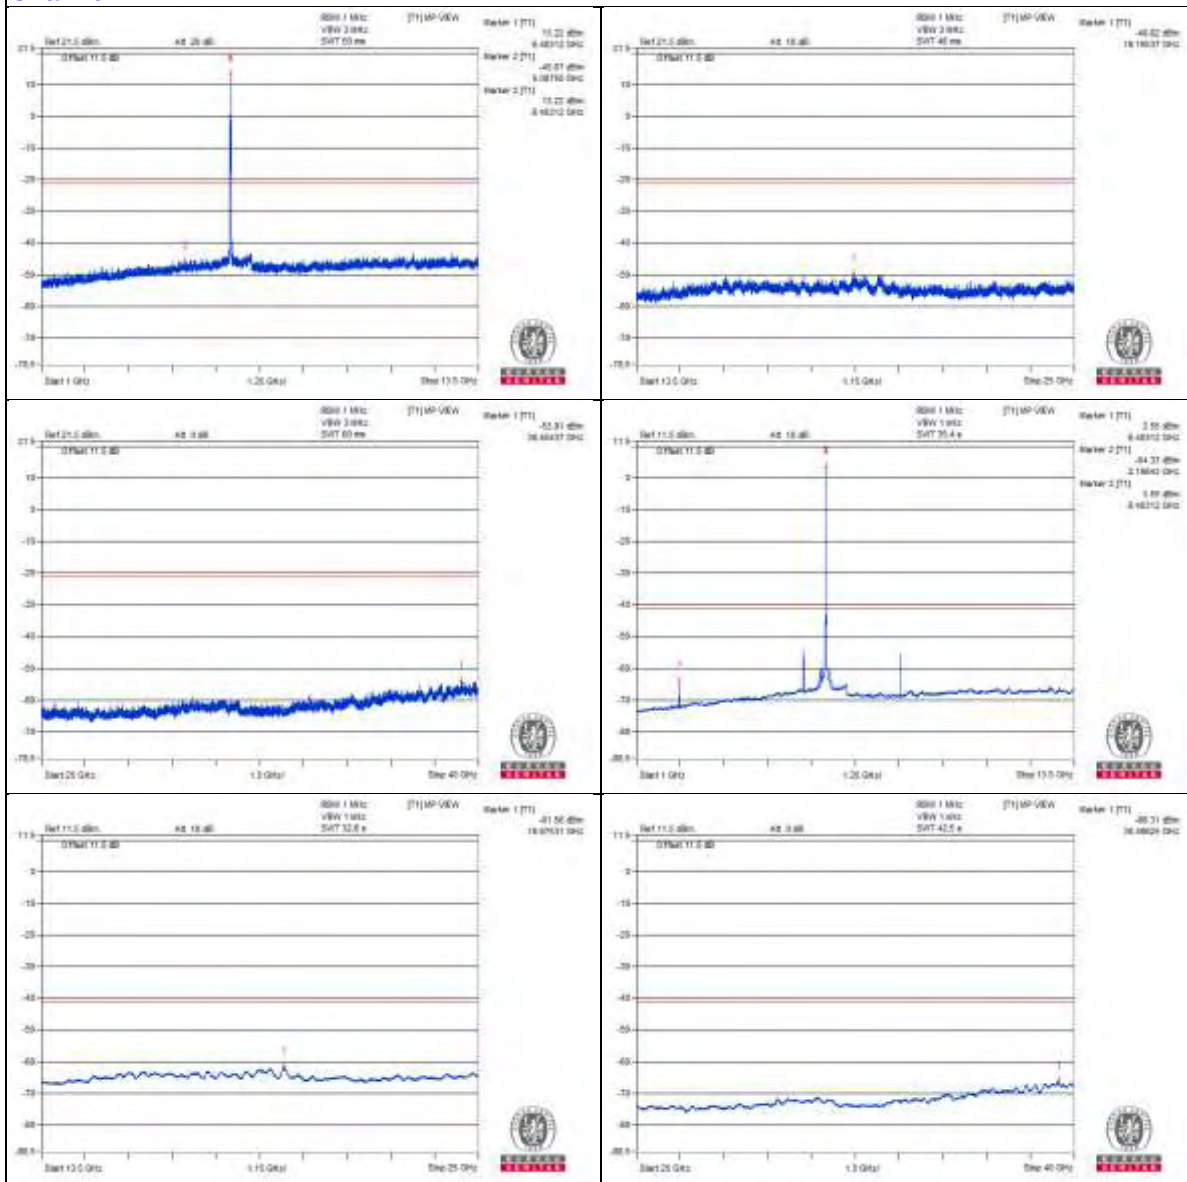

Chain 1

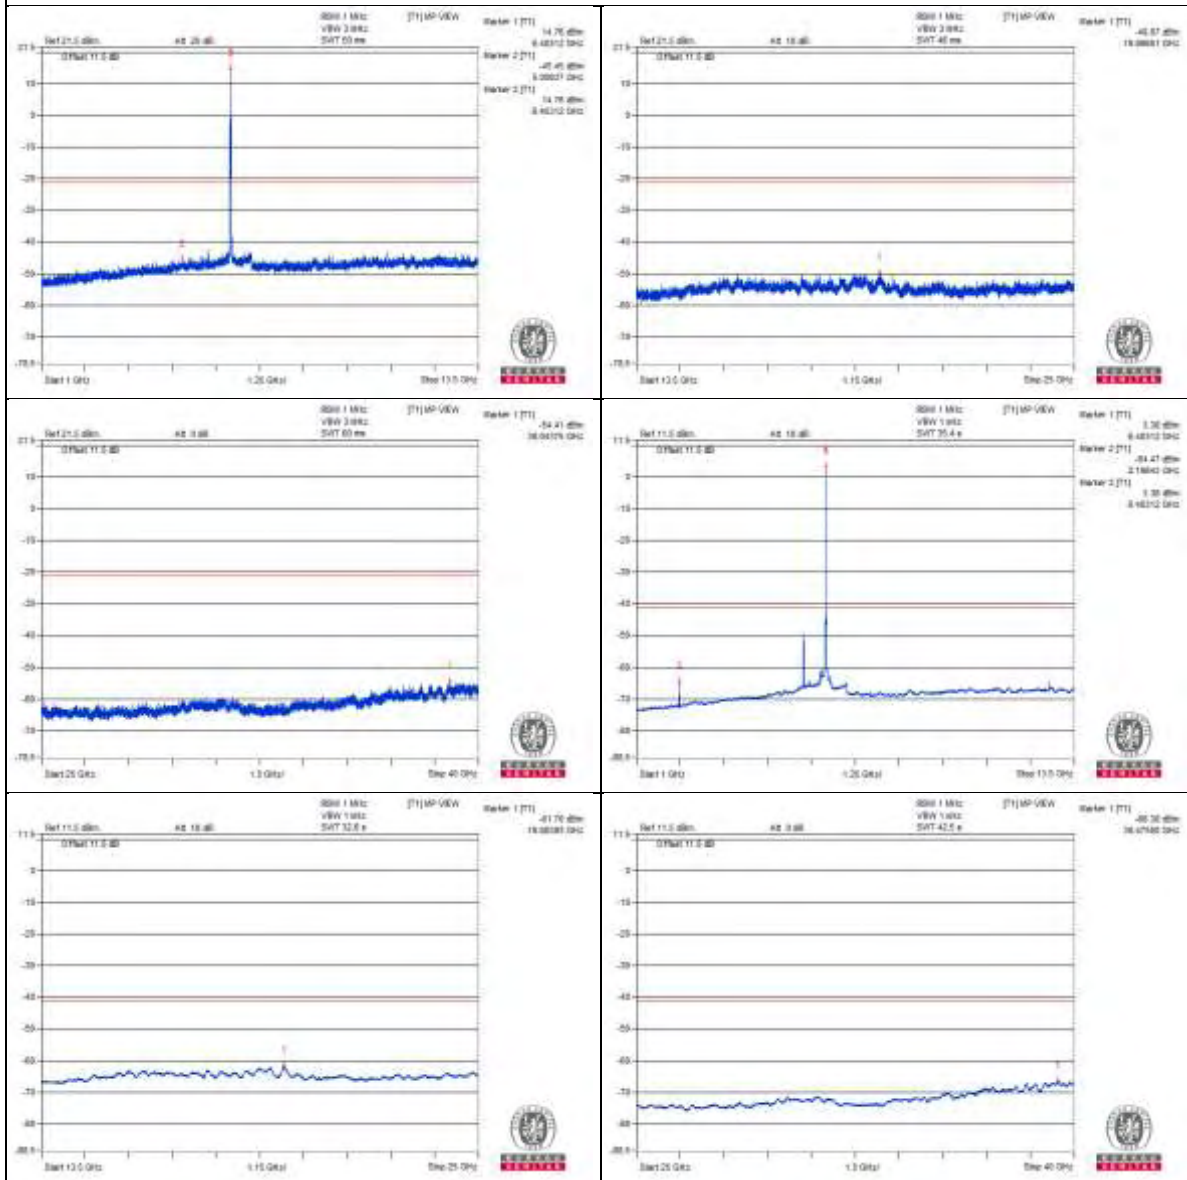

Channel 123

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	2364.06 PK	55.39	74	-18.61	-51.78	-50.42	8.17	-39.87
2	2360.93 AV	43.3	54	-10.7	-63.13	-63.16	8.17	-51.96
3	5481.25 PK	58.94	88.2	-29.26	-48.74	-46.53	8.17	-36.32
4	5484.37 AV	38.61	68.2	-29.59	-67.82	-67.84	8.17	-56.65
5	5759.37 PK	63.1	88.2	-25.1	-43.64	-43.06	8.17	-32.16
6	5759.37 AV	56.16	68.2	-12.04	-52.68	-48.74	8.17	-39.1
7	8750 PK	59.75	88.2	-28.45	-46.72	-46.66	8.17	-35.51
8	8753.12 AV	47.18	68.2	-21.02	-56.59	-67.46	8.17	-48.08
9	13131.25 PK	60.25	88.2	-27.95	-46.5	-45.9	8.17	-35.01
10	13132.81 AV	42.59	68.2	-25.61	-65.66	-62.58	8.17	-52.67
11	19699.93 PK	52.53	74	-21.47	-54.25	-53.6	8.17	-42.73
12	19691.31 AV	41.25	54	-12.75	-65.17	-65.22	8.17	-54.01

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

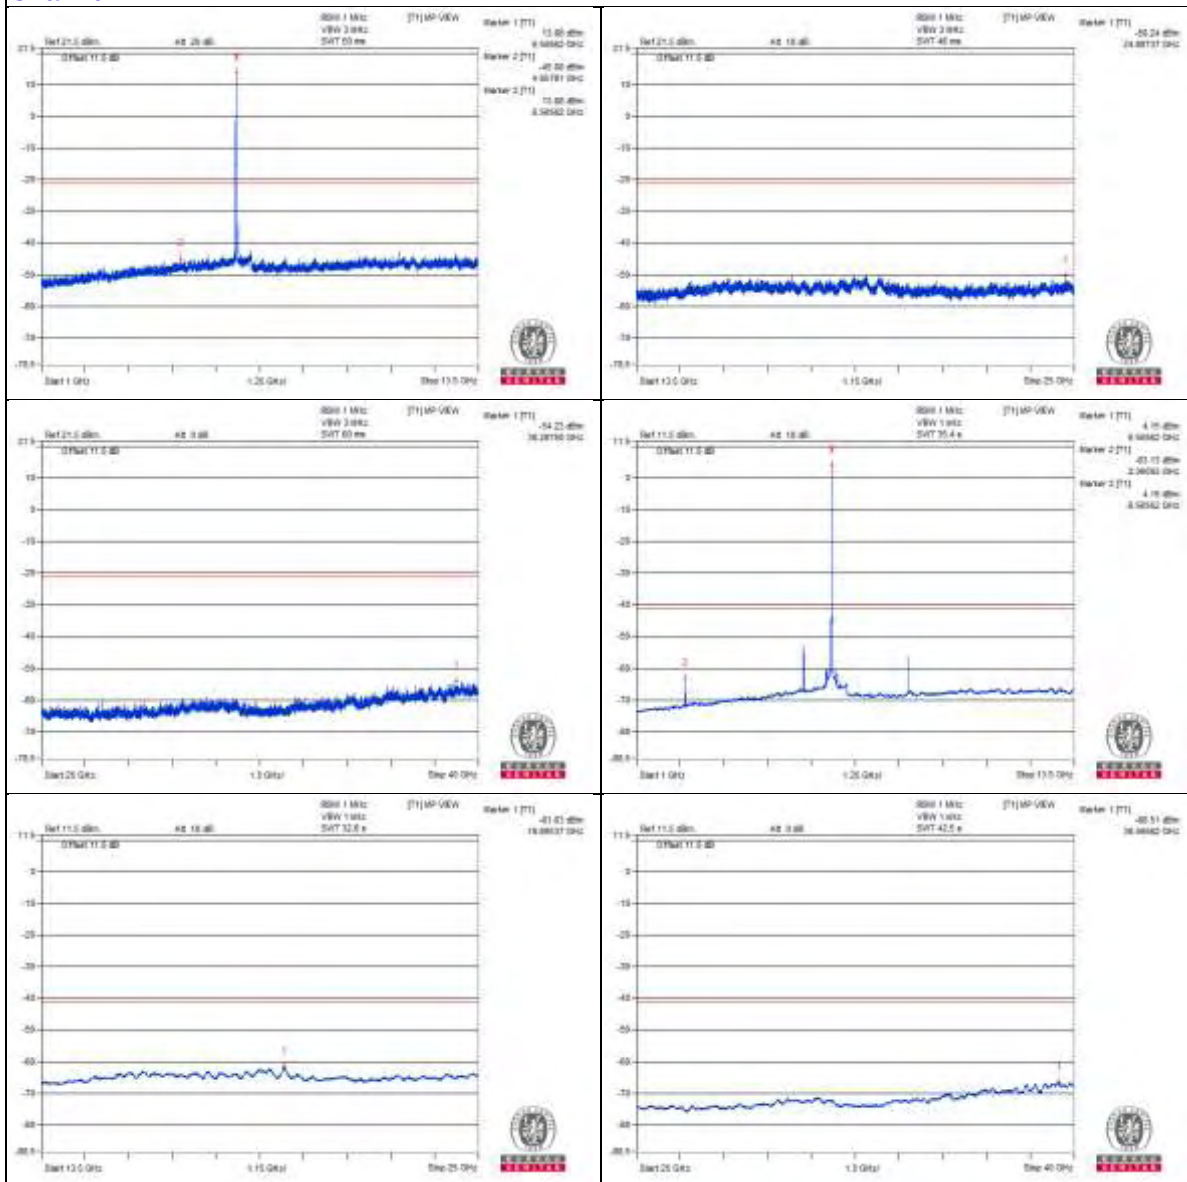

Chain 1

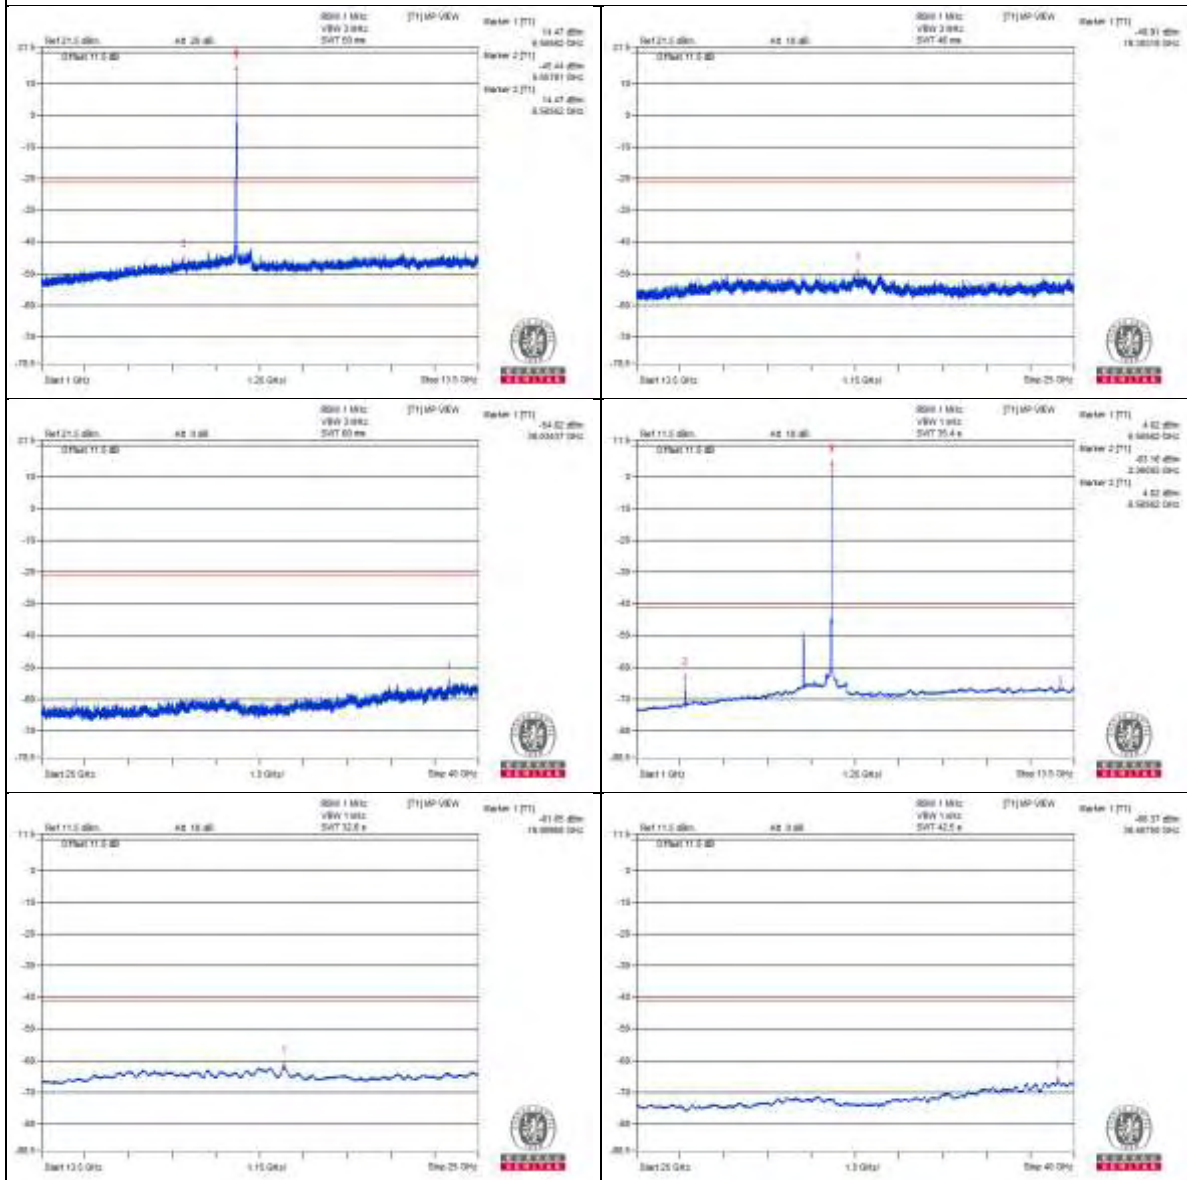

Channel 155

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	2515.62 PK	57.09	74	-16.91	-48.12	-51.07	8.17	-38.17
2	2520.31 AV	43.22	54	-10.78	-62.26	-64.46	8.17	-52.04
3	5481.25 PK	58.83	88.2	-29.37	-46.72	-48.73	8.17	-36.43
4	5484.37 AV	38.64	68.2	-29.56	-67.67	-67.93	8.17	-56.62
5	5759.37 PK	63.2	88.2	-25	-42.82	-43.7	8.17	-32.06
6	5759.37 AV	56.82	68.2	-11.38	-50.67	-48.78	8.17	-38.44
7	8967.18 PK	59.81	88.2	-28.39	-45.45	-48.27	8.17	-35.45
8	8967.18 AV	42.63	68.2	-25.57	-61.68	-68.15	8.17	-52.63
9	13451.56 PK	60.75	88.2	-27.45	-45.78	-45.6	8.17	-34.51
10	13453.12 AV	41.22	68.2	-26.98	-66.8	-64.07	8.17	-54.04
11	20178.62 PK	52.11	74	-21.89	-53.72	-55.04	8.17	-43.15
12	20171.43 AV	41.58	54	-12.42	-64.95	-64.77	8.17	-53.68

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

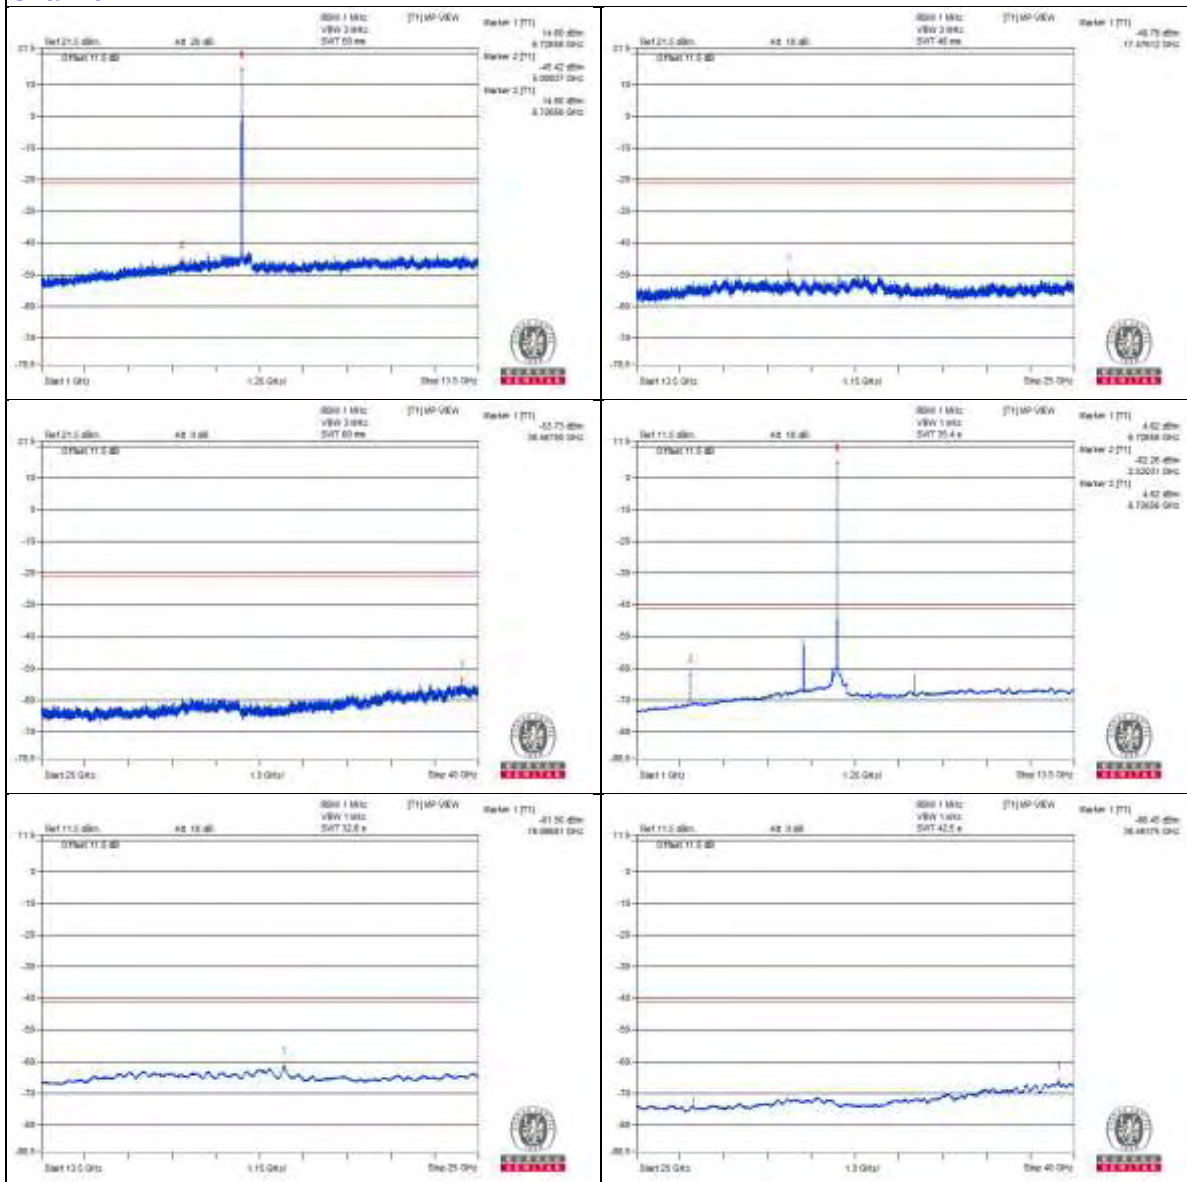

Chain 1

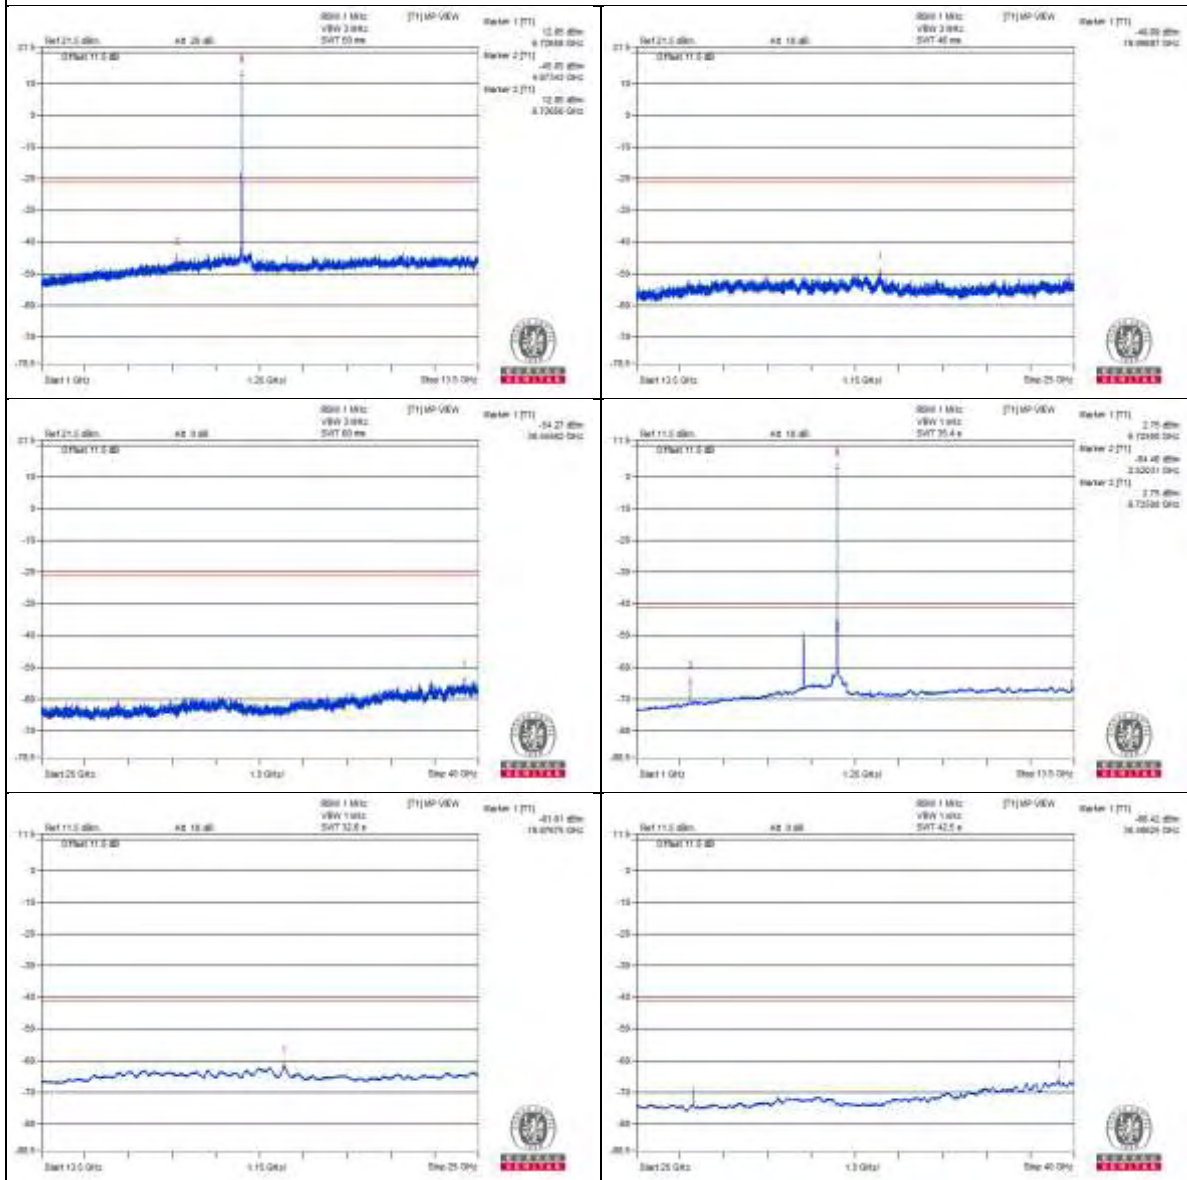

Channel 179

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	2642.18 PK	56.17	74	-17.83	-50.21	-50.33	8.17	-39.09
2	2637.5 AV	40.49	54	-13.51	-66.51	-65.45	8.17	-54.77
3	5485.93 PK	58.73	88.2	-29.47	-47.52	-47.91	8.17	-36.53
4	5485.93 AV	38.61	68.2	-29.59	-67.94	-67.72	8.17	-56.65
5	5759.37 PK	62.39	88.2	-25.81	-44	-44.11	8.17	-32.87
6	5759.37 AV	56.73	68.2	-11.47	-50.85	-48.81	8.17	-38.53
7	9129.68 PK	60.35	74	-13.65	-46.06	-46.13	8.17	-34.91
8	9126.56 AV	40.88	54	-13.12	-64.14	-67.68	8.17	-54.38
9	13686.87 PK	53.28	88.2	-34.92	-54.19	-52.33	8.17	-41.98
10	13686.87 AV	42.31	68.2	-25.89	-65.16	-63.3	8.17	-52.95
11	20539.43 PK	51.04	74	-22.96	-56.37	-54.61	8.17	-44.22
12	20536.56 AV	40.97	54	-13.03	-65.43	-65.51	8.17	-54.29

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

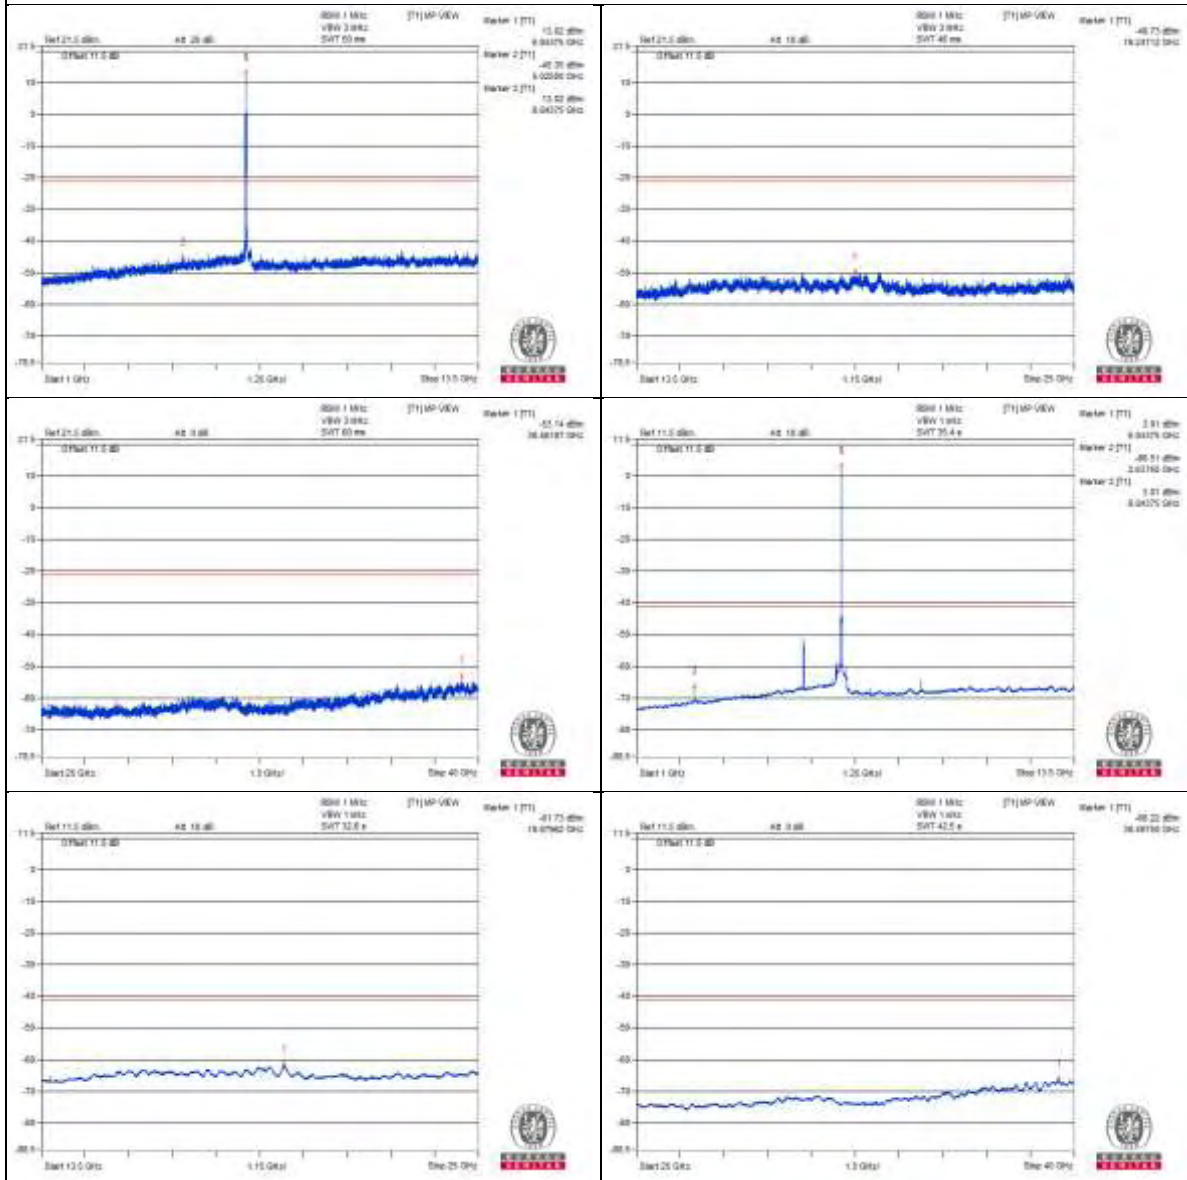

Chain 1

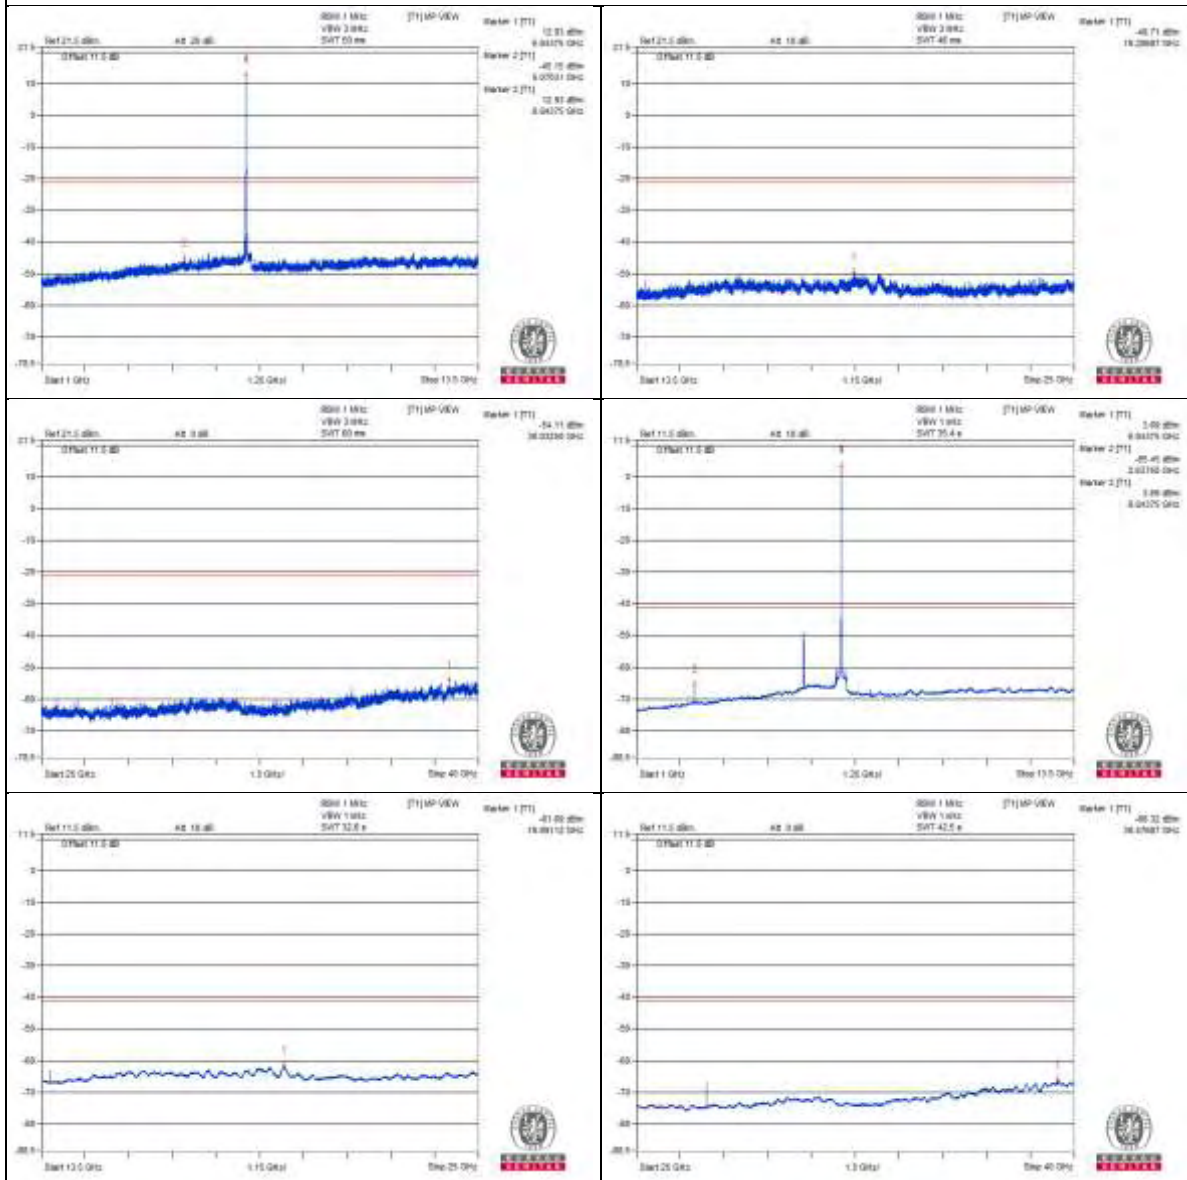

Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	7141.2 PK	60.61	88.2	-27.59	-46.36	-45.35	8.17	-34.65
2	7207.7 AV	47.04	68.2	-21.16	-59.4	-59.4	8.17	-48.22


Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8


d = measurement distance in 3 meters.

* The unwanted emission was verified and the test result was passed by radiated measurement.

Chain 0

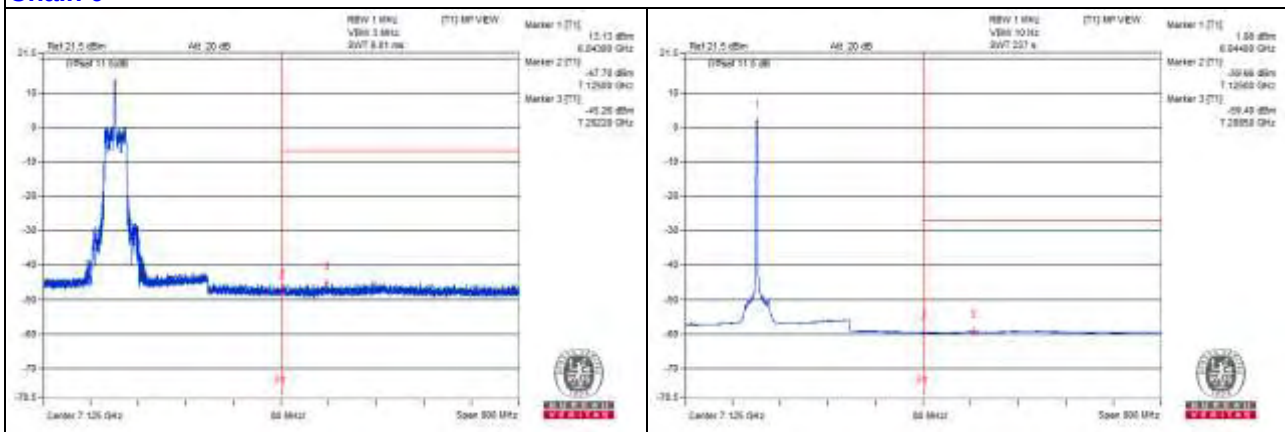

Chain 1

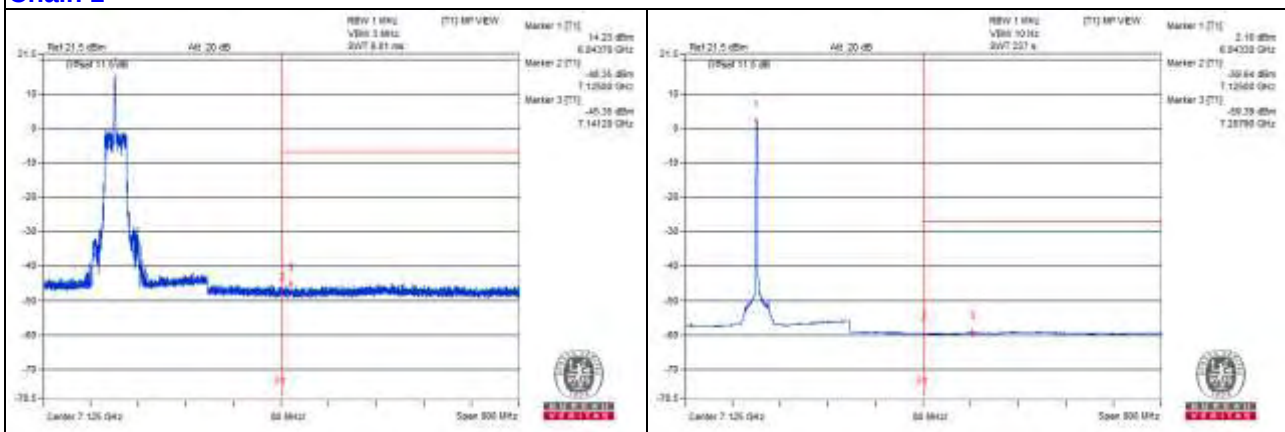

RU52

Channel 3

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	1759.37 PK	55.35	74	-18.65	-51.02	-51.17	8.17	-39.91
2	1760.93 AV	46.05	54	-7.95	-61.07	-59.81	8.17	-49.21
3	5479.68 PK	59.38	88.2	-28.82	-46.88	-47.25	8.17	-35.88
4	5487.5 AV	40.36	68.2	-27.84	-67.19	-65.2	8.17	-54.9
5	5759.37 PK	63.03	88.2	-25.17	-44.1	-42.81	8.17	-32.23
6	5759.37 AV	56.45	68.2	-11.75	-49.38	-50.71	8.17	-38.81
7	7953.12 PK	59.93	88.2	-28.27	-47.4	-45.77	8.17	-35.33
8	7953.12 AV	45.85	68.2	-22.35	-62.86	-59.11	8.17	-49.41
9	11934.37 PK	60.47	74	-13.53	-45.42	-46.61	8.17	-34.79
10	11934.37 AV	41.45	54	-12.55	-64.34	-65.76	8.17	-53.81
11	17895.87 PK	53.58	74	-20.42	-52.93	-52.79	8.17	-41.68
12	17898.75 AV	43.3	54	-10.7	-63.38	-62.91	8.17	-51.96

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

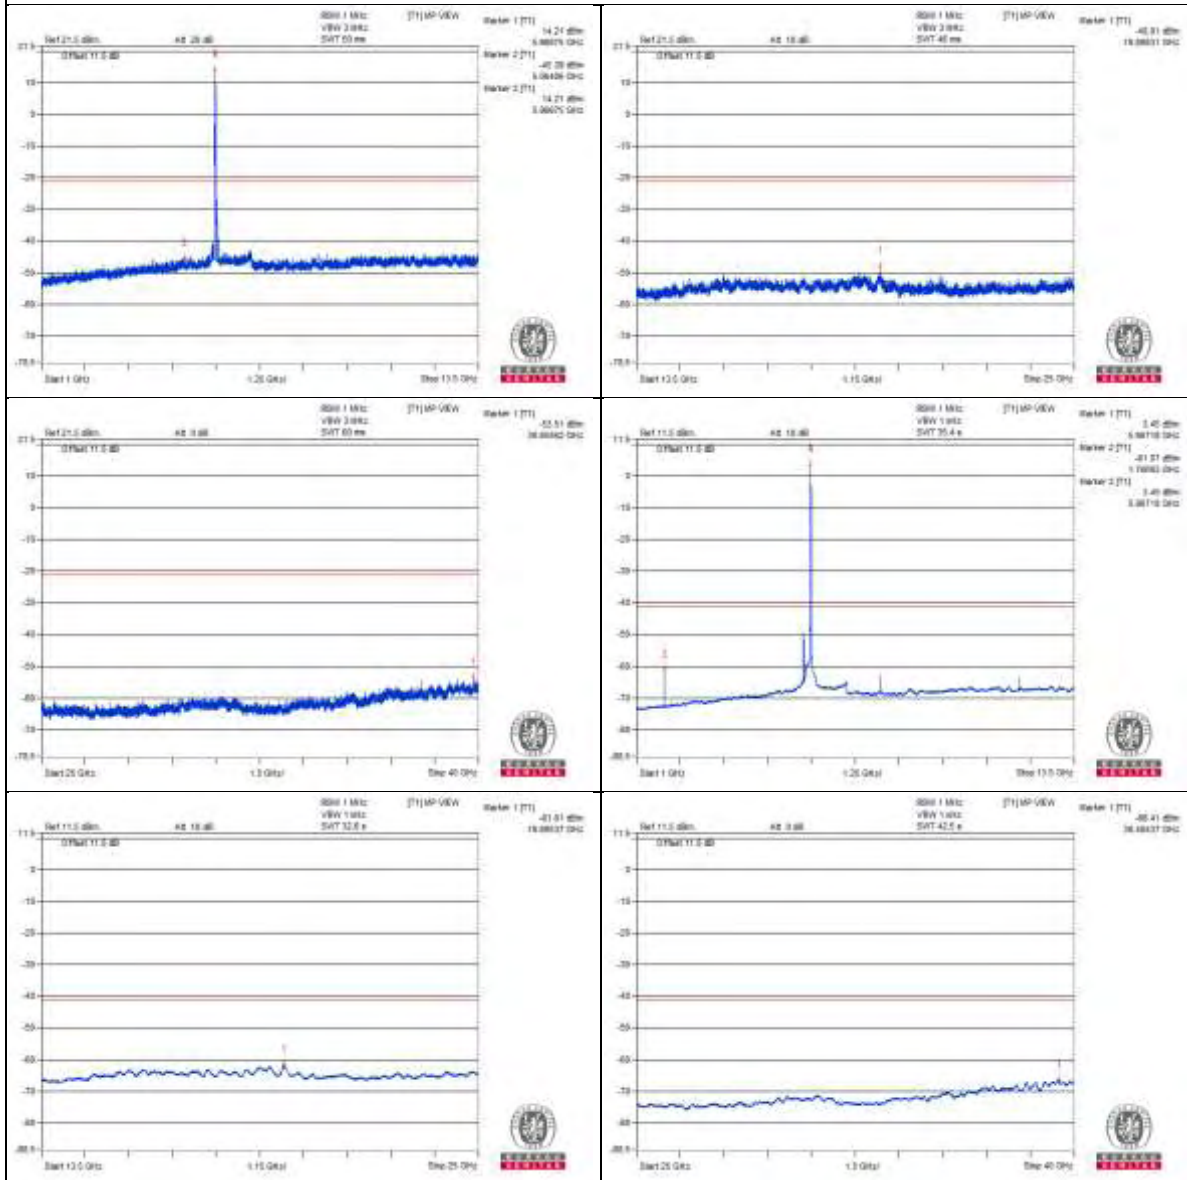

Chain 1

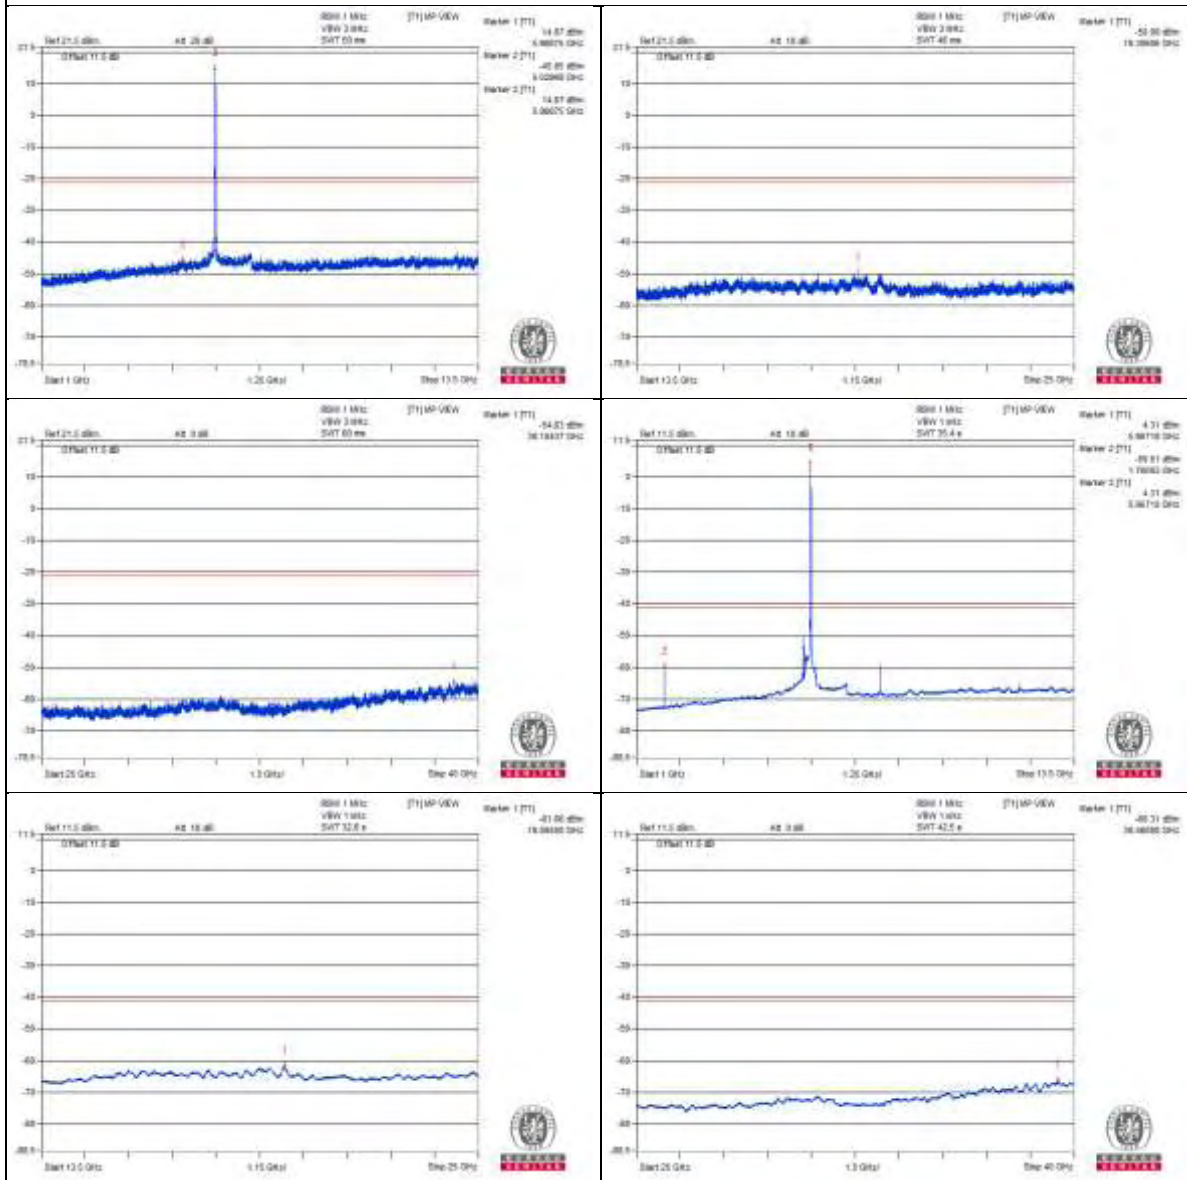

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5924.37 PK	78.77	88.2	-9.43	-26.19	-29.88	8.15	-16.49
2	5894.3 AV	58.36	68.2	-9.84	-48.12	-48.01	8.15	-36.9

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

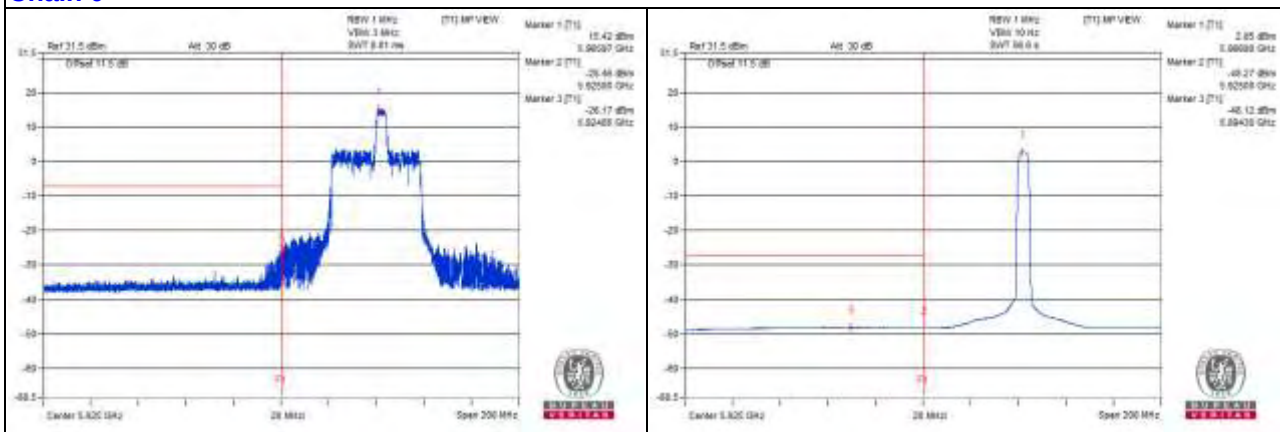

Chain 1

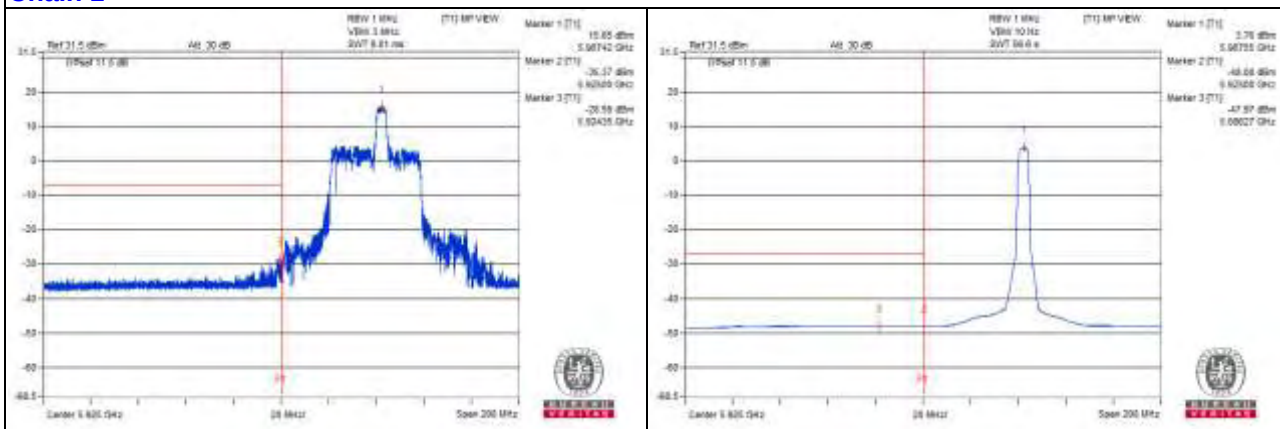

Channel 43

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	1957.81 PK	55.26	74	-18.74	-50.18	-52.49	8.17	-40
2	1957.81 AV	46.94	54	-7.06	-59.06	-59.99	8.17	-48.32
3	5484.37 PK	59.39	88.2	-28.81	-48.29	-46.09	8.17	-35.87
4	5487.5 AV	40	68.2	-28.2	-66.18	-66.71	8.17	-55.26
5	5759.37 PK	63.56	88.2	-24.64	-42.83	-42.94	8.17	-31.7
6	5759.37 AV	58.14	68.2	-10.06	-47.91	-48.74	8.17	-37.12
7	8220.31 PK	59.04	74	-14.96	-46.51	-48.53	8.17	-36.22
8	8220.31 AV	45.65	54	-8.35	-60.39	-61.24	8.17	-49.61
9	12326.56 PK	61.05	74	-12.95	-44.81	-46.05	8.17	-34.21
10	12325 AV	43.75	54	-10.25	-61.19	-65	8.17	-51.51
11	18495.31 PK	52.64	74	-21.36	-54.22	-53.41	8.17	-42.62
12	18499.62 AV	41.96	54	-12.04	-64.22	-64.75	8.17	-53.3

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

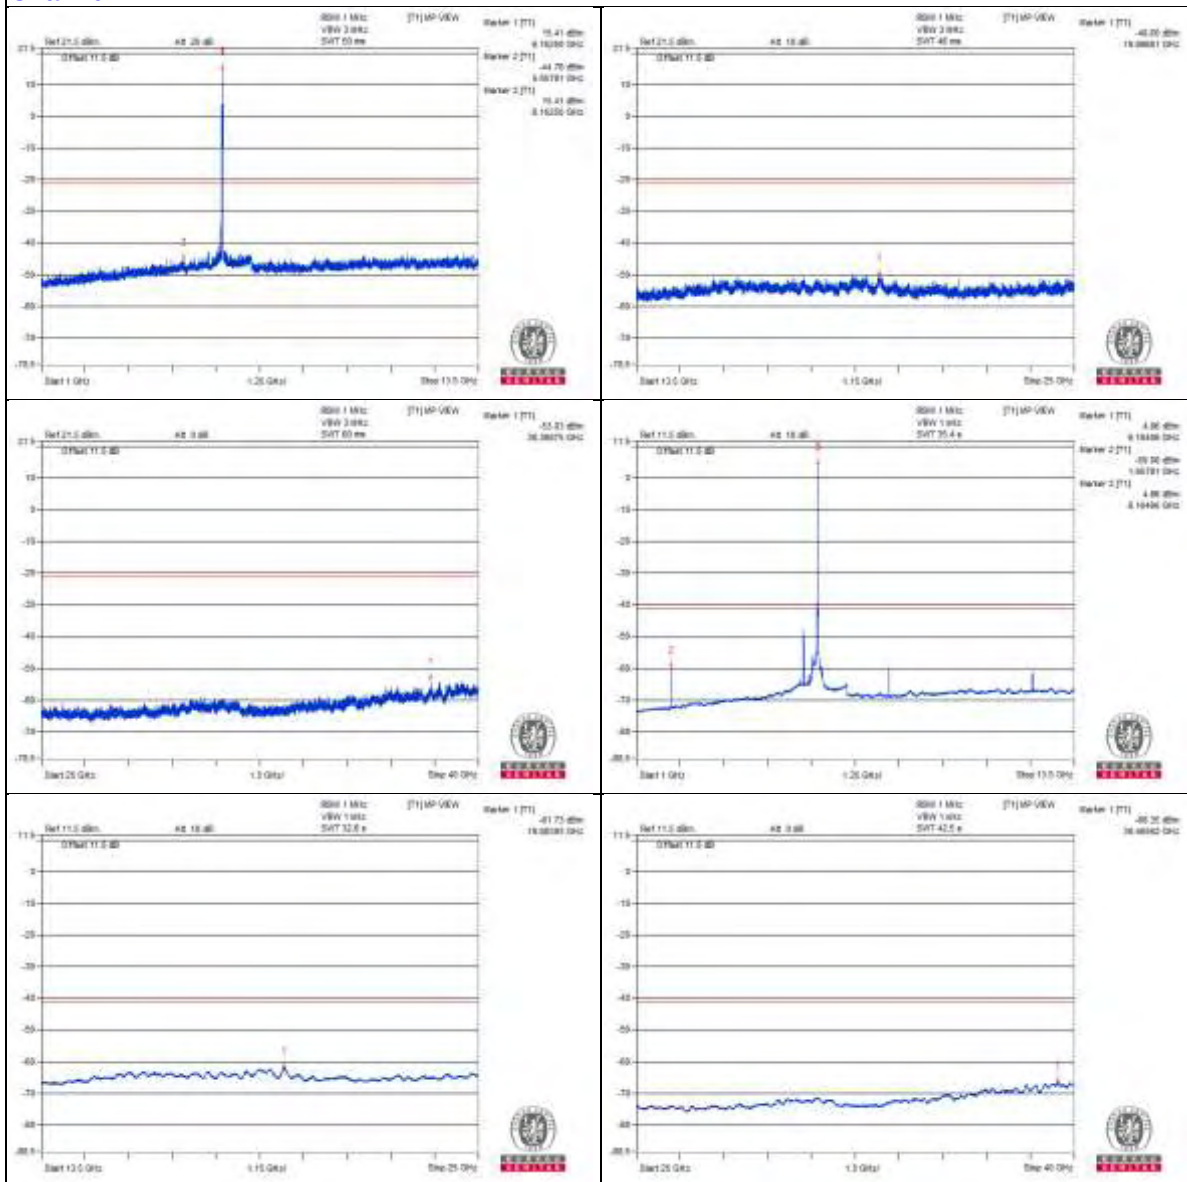

Chain 1

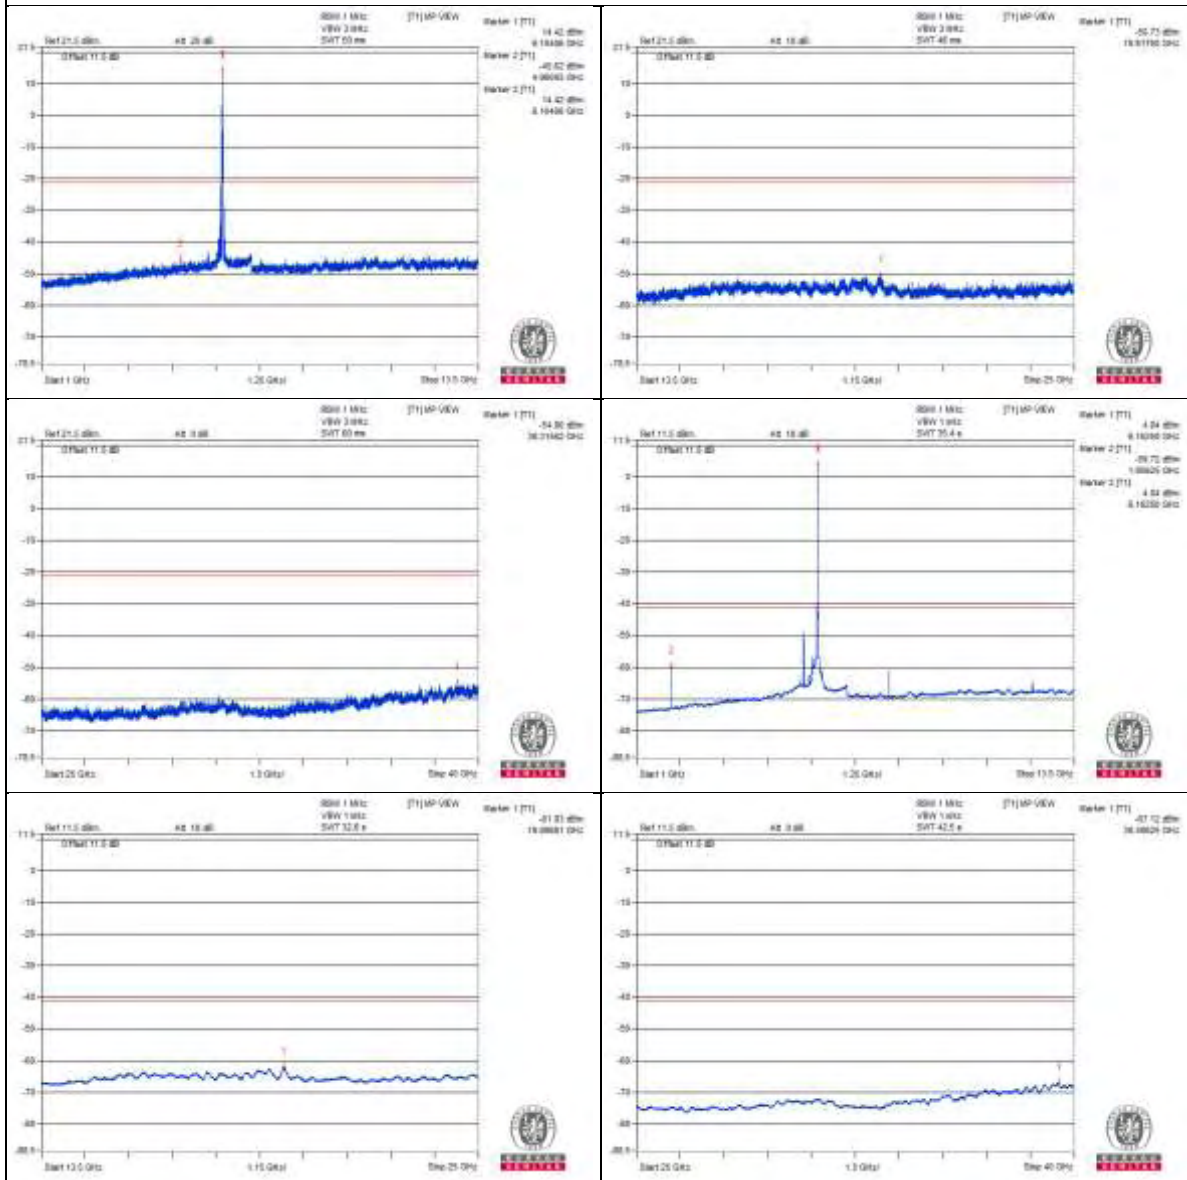

Channel 91

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	2198.43 PK	55.45	88.2	-32.75	-50.21	-51.95	8.17	-39.81
2	2196.87 AV	46.55	68.2	-21.65	-59.44	-60.4	8.17	-48.71
3	5481.25 PK	60.03	88.2	-28.17	-45.37	-47.77	8.17	-35.23
4	5482.81 AV	38.44	68.2	-29.76	-67.87	-68.13	8.17	-56.82
5	5759.37 PK	60.44	88.2	-27.76	-45.31	-46.82	8.17	-34.82
6	5759.37 AV	51.37	68.2	-16.83	-54.67	-55.52	8.17	-43.89
7	8540.62 PK	59.31	88.2	-28.89	-46.88	-47.39	8.17	-35.95
8	8540.62 AV	48.67	68.2	-19.53	-57.2	-58.43	8.17	-46.59
9	12807.81 PK	60.26	88.2	-27.94	-46.55	-45.84	8.17	-35
10	12806.25 AV	40.84	68.2	-27.36	-64.66	-66.81	8.17	-54.42
11	19214.06 PK	53.83	74	-20.17	-51.77	-53.65	8.17	-41.43
12	19211.18 AV	43.61	54	-10.39	-62.52	-63.17	8.17	-51.65

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

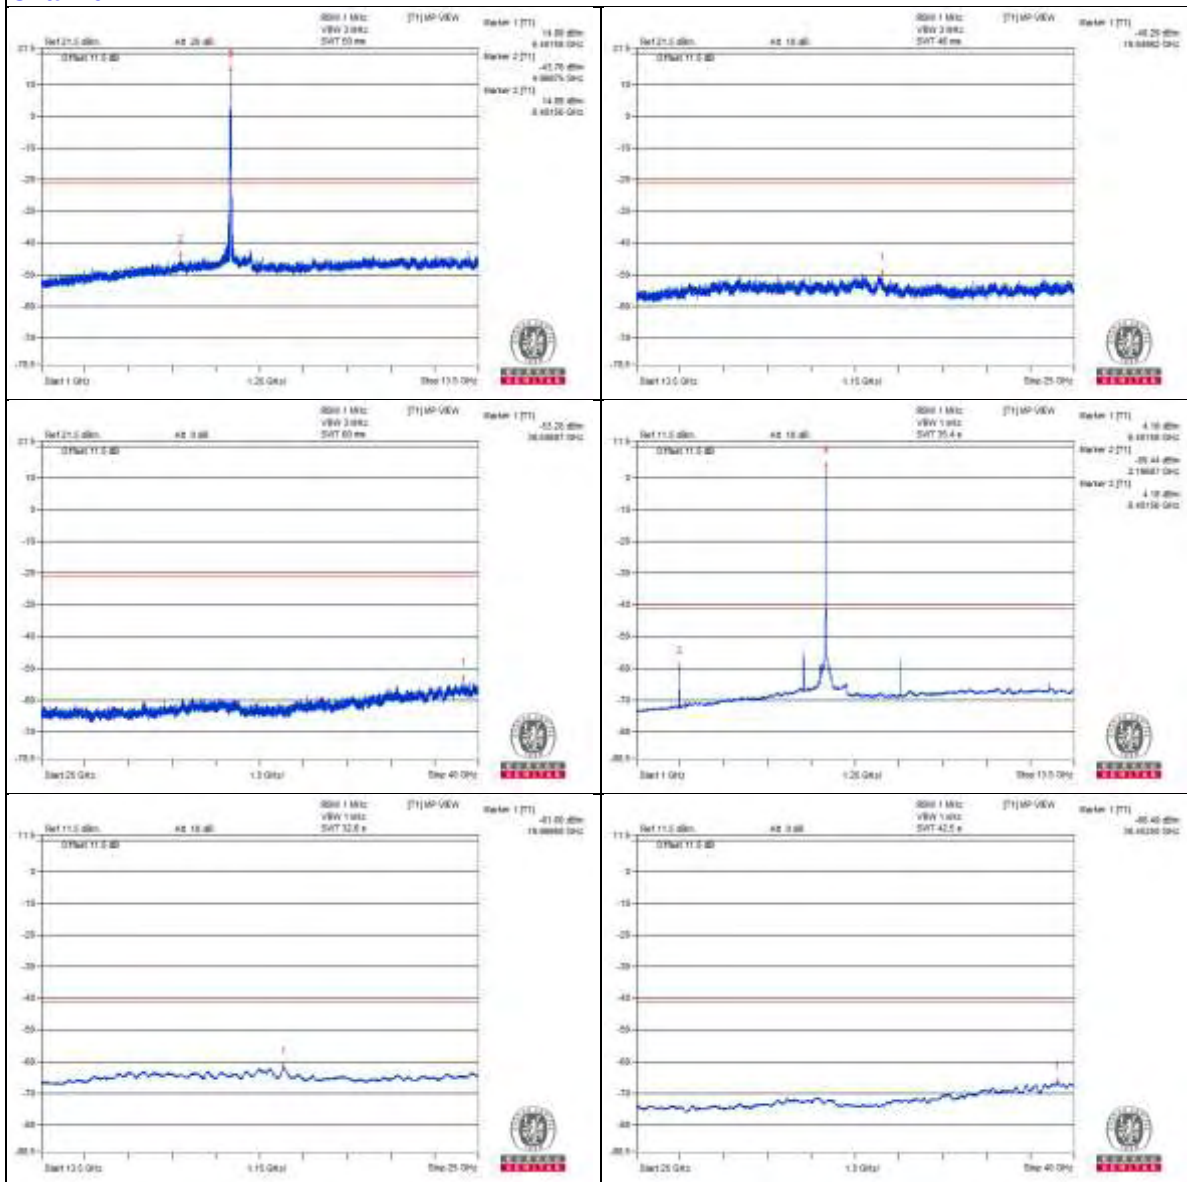

Chain 1

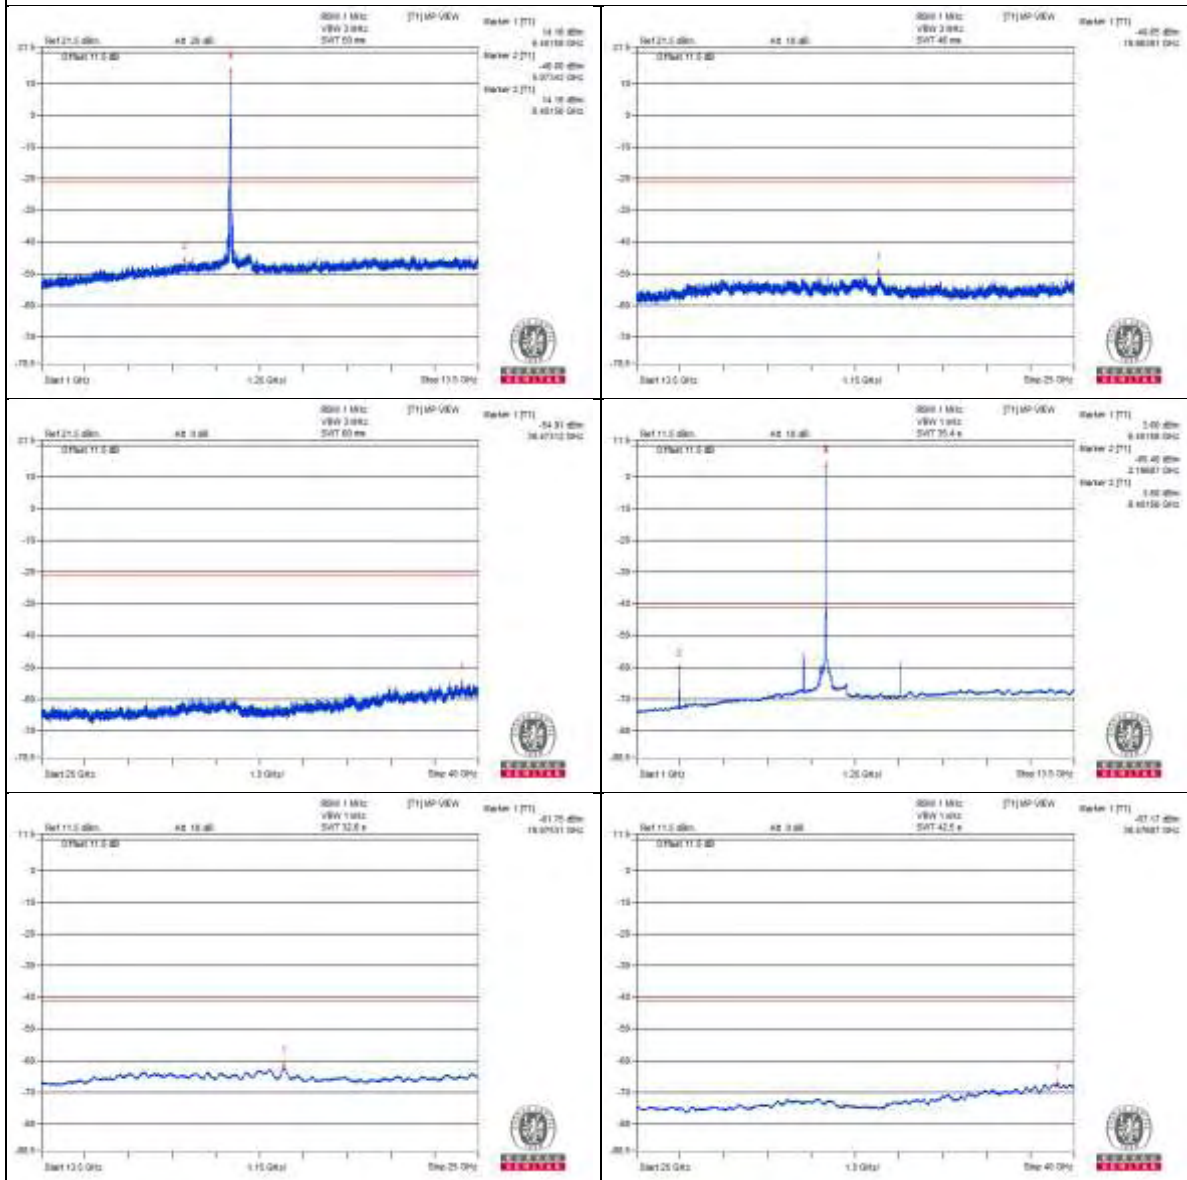

Channel 123

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	2364.06 PK	55.7	74	-18.3	-50	-51.63	8.17	-39.56
2	2360.93 AV	46.76	54	-7.24	-58.96	-60.55	8.17	-48.5
3	5484.37 PK	58.96	88.2	-29.24	-47.05	-47.96	8.17	-36.3
4	5485.93 AV	38.51	68.2	-29.69	-67.68	-68.2	8.17	-56.75
5	5759.37 PK	60.79	88.2	-27.41	-45.1	-46.27	8.17	-34.47
6	5759.37 AV	52.54	68.2	-15.66	-53.49	-54.35	8.17	-42.72
7	8753.12 PK	60.88	88.2	-27.32	-45.75	-45.37	8.17	-34.38
8	8753.12 AV	48.55	68.2	-19.65	-57.14	-58.79	8.17	-46.71
9	13132.81 PK	60.5	88.2	-27.7	-45.6	-46.31	8.17	-34.76
10	13134.37 AV	41.03	68.2	-27.17	-64.89	-66.01	8.17	-54.23
11	19698.5 PK	51.75	74	-22.25	-54.51	-54.87	8.17	-43.51
12	19698.5 AV	41.07	54	-12.93	-64.99	-65.79	8.17	-54.19

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

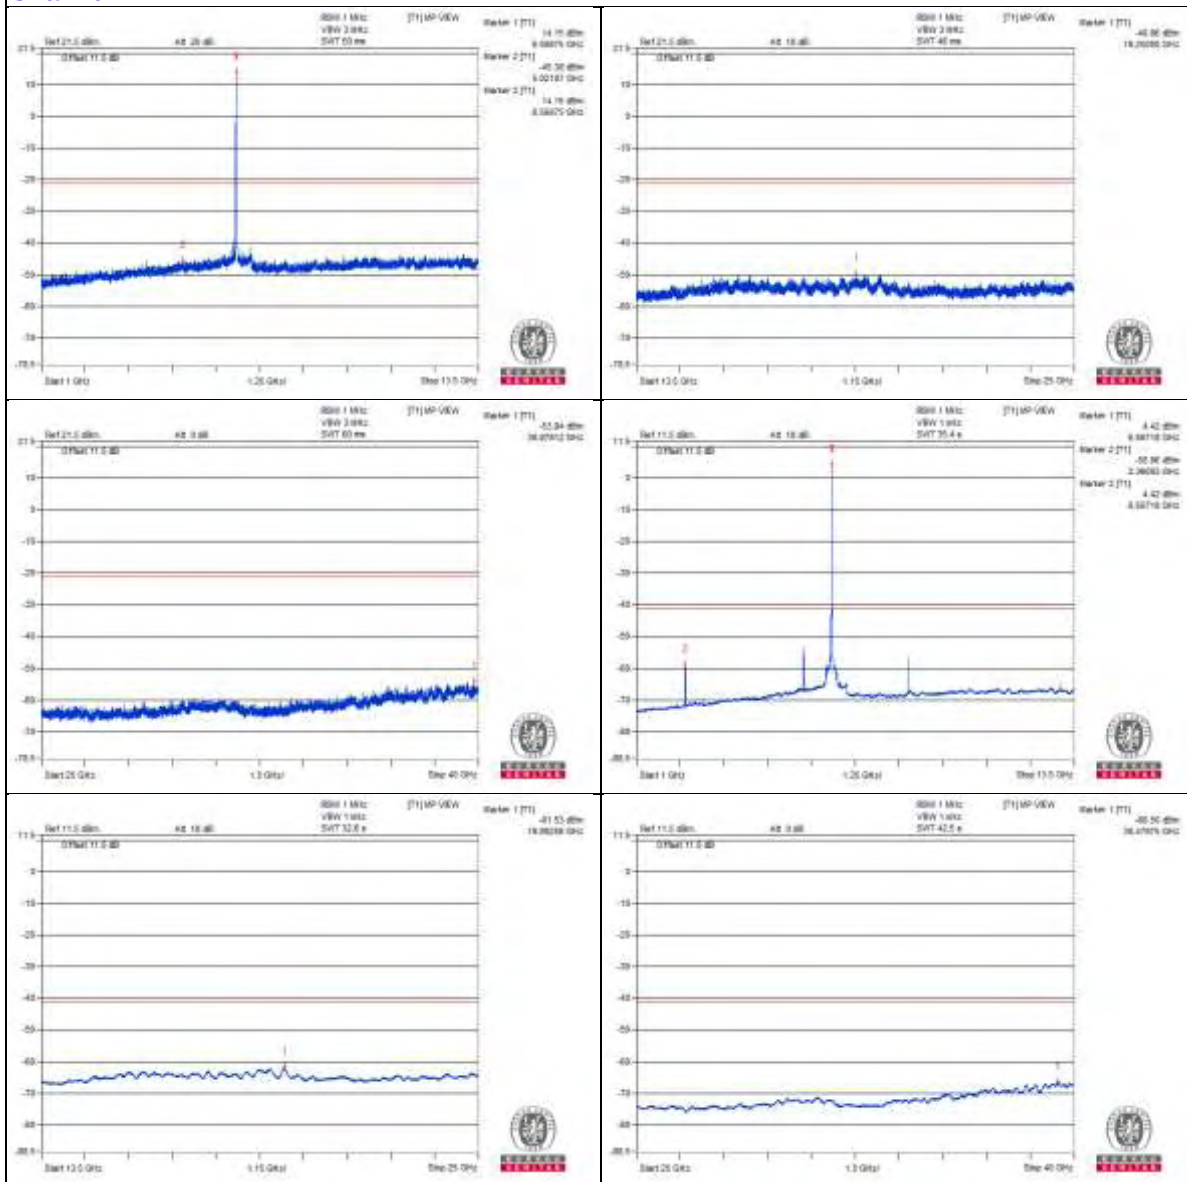

Chain 1

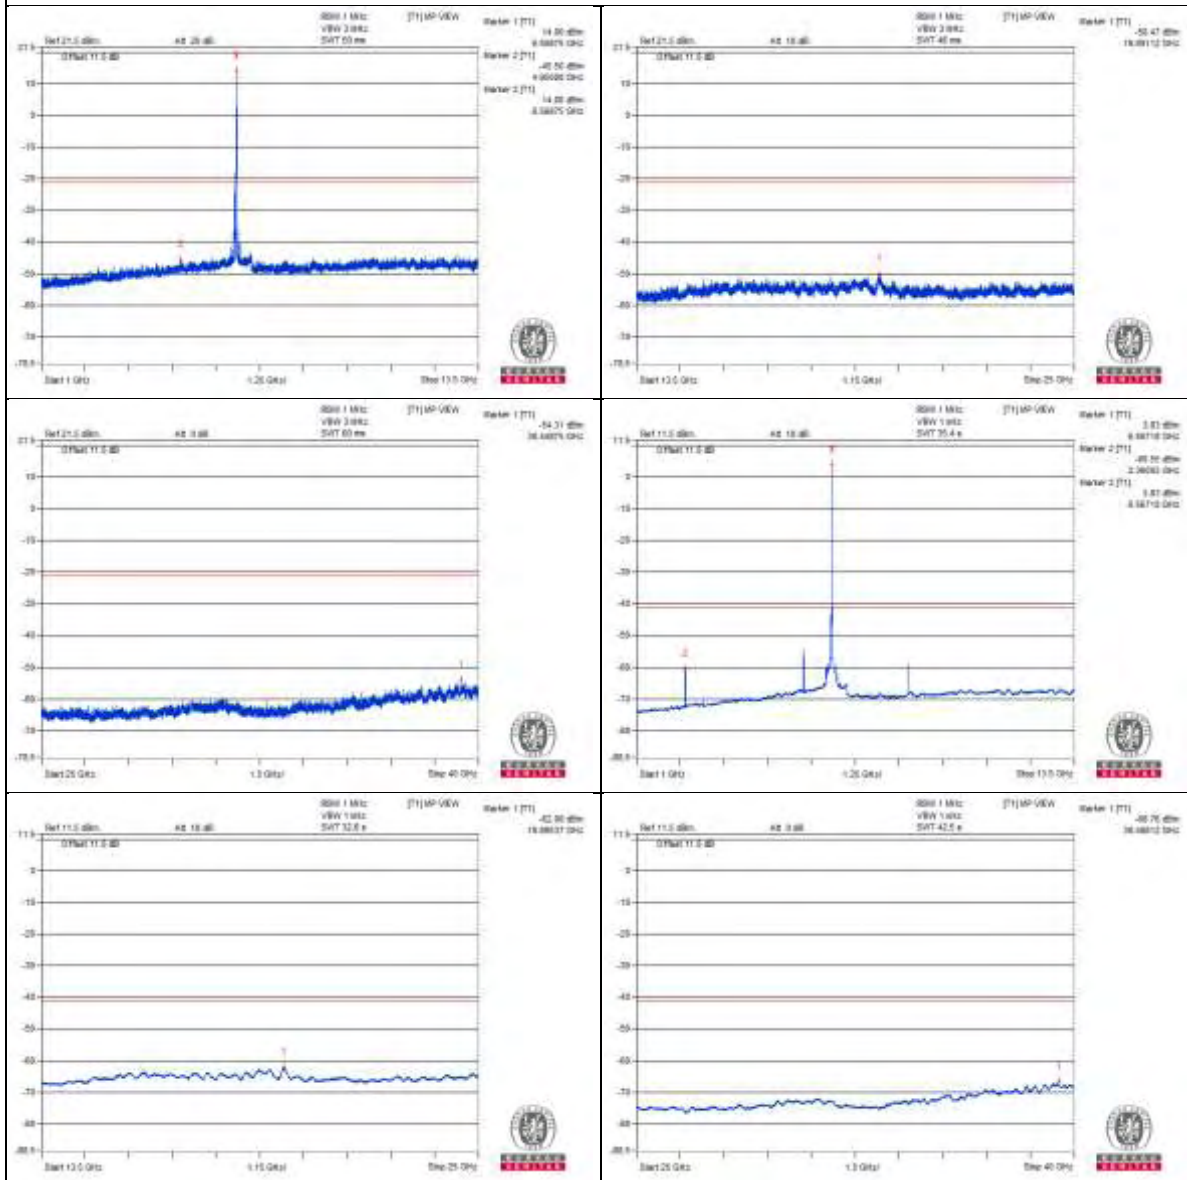

Channel 155

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	2521.87 PK	56.87	74	-17.13	-48.23	-51.51	8.17	-38.39
2	2521.87 AV	47.17	54	-6.83	-58.95	-59.61	8.17	-48.09
3	5485.93 PK	59.66	88.2	-28.54	-46.57	-47.01	8.17	-35.6
4	5485.93 AV	38.51	68.2	-29.69	-67.79	-68.07	8.17	-56.75
5	5759.37 PK	61.05	88.2	-27.15	-45.42	-45.37	8.17	-34.21
6	5759.37 AV	54.59	68.2	-13.61	-51.39	-52.37	8.17	-40.67
7	8968.75 PK	59.62	88.2	-28.58	-45.61	-48.49	8.17	-35.64
8	8967.18 AV	43.66	68.2	-24.54	-62.2	-63.46	8.17	-51.6
9	13453.12 PK	60.45	88.2	-27.75	-45.65	-46.37	8.17	-34.81
10	13454.68 AV	39.27	68.2	-28.93	-66.62	-67.81	8.17	-55.99
11	20178.62 PK	52.36	74	-21.64	-52.59	-56.36	8.17	-42.9
12	20177.18 AV	41.63	54	-12.37	-64.3	-65.39	8.17	-53.63

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

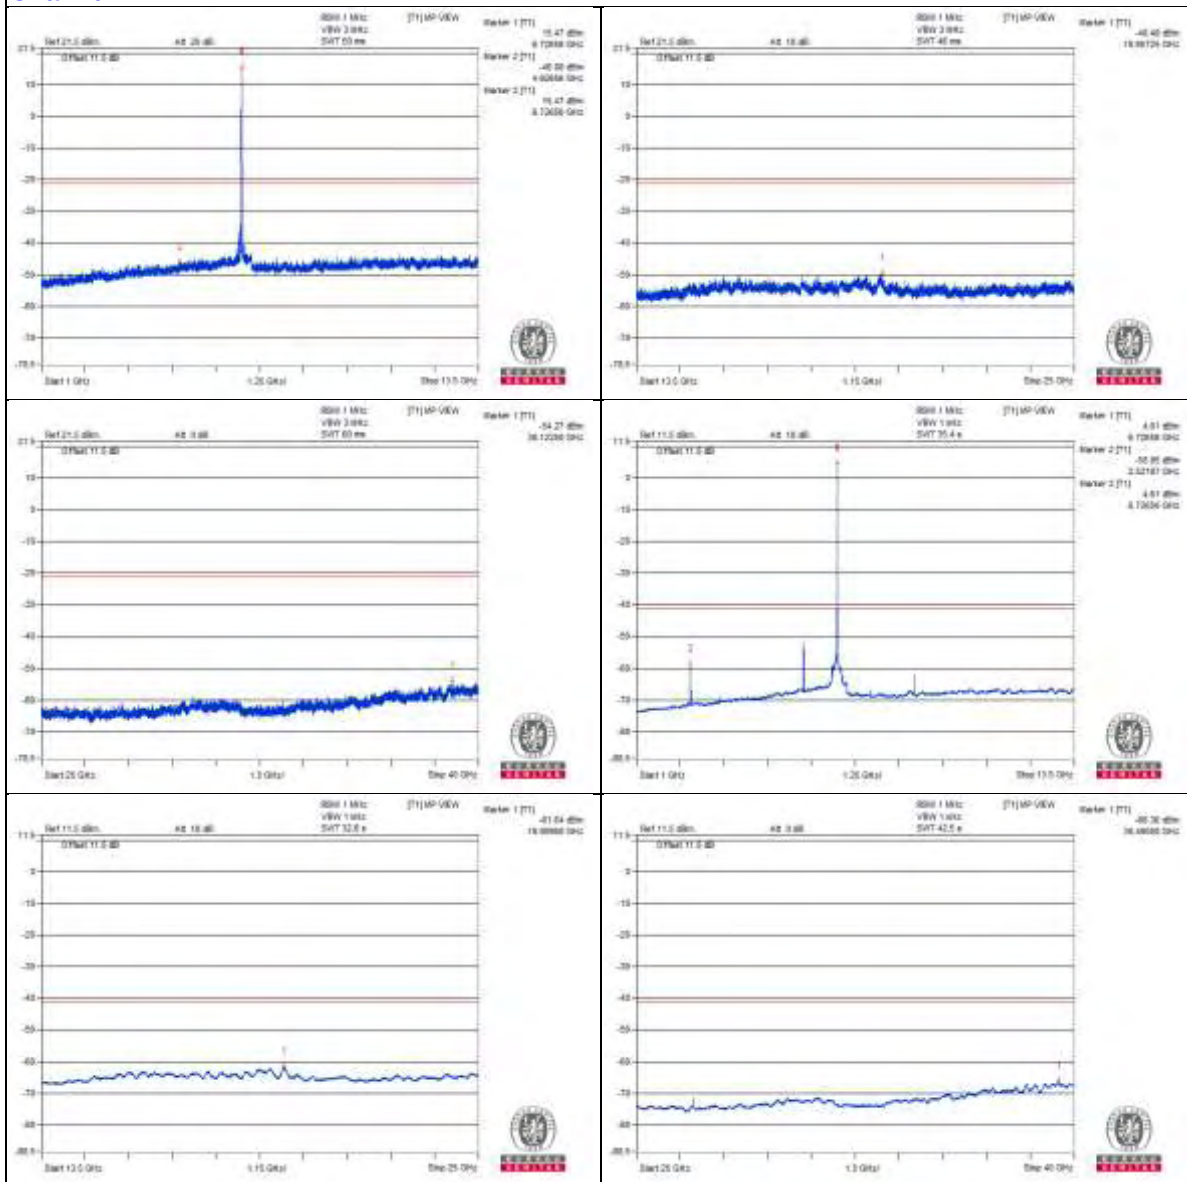

Chain 1

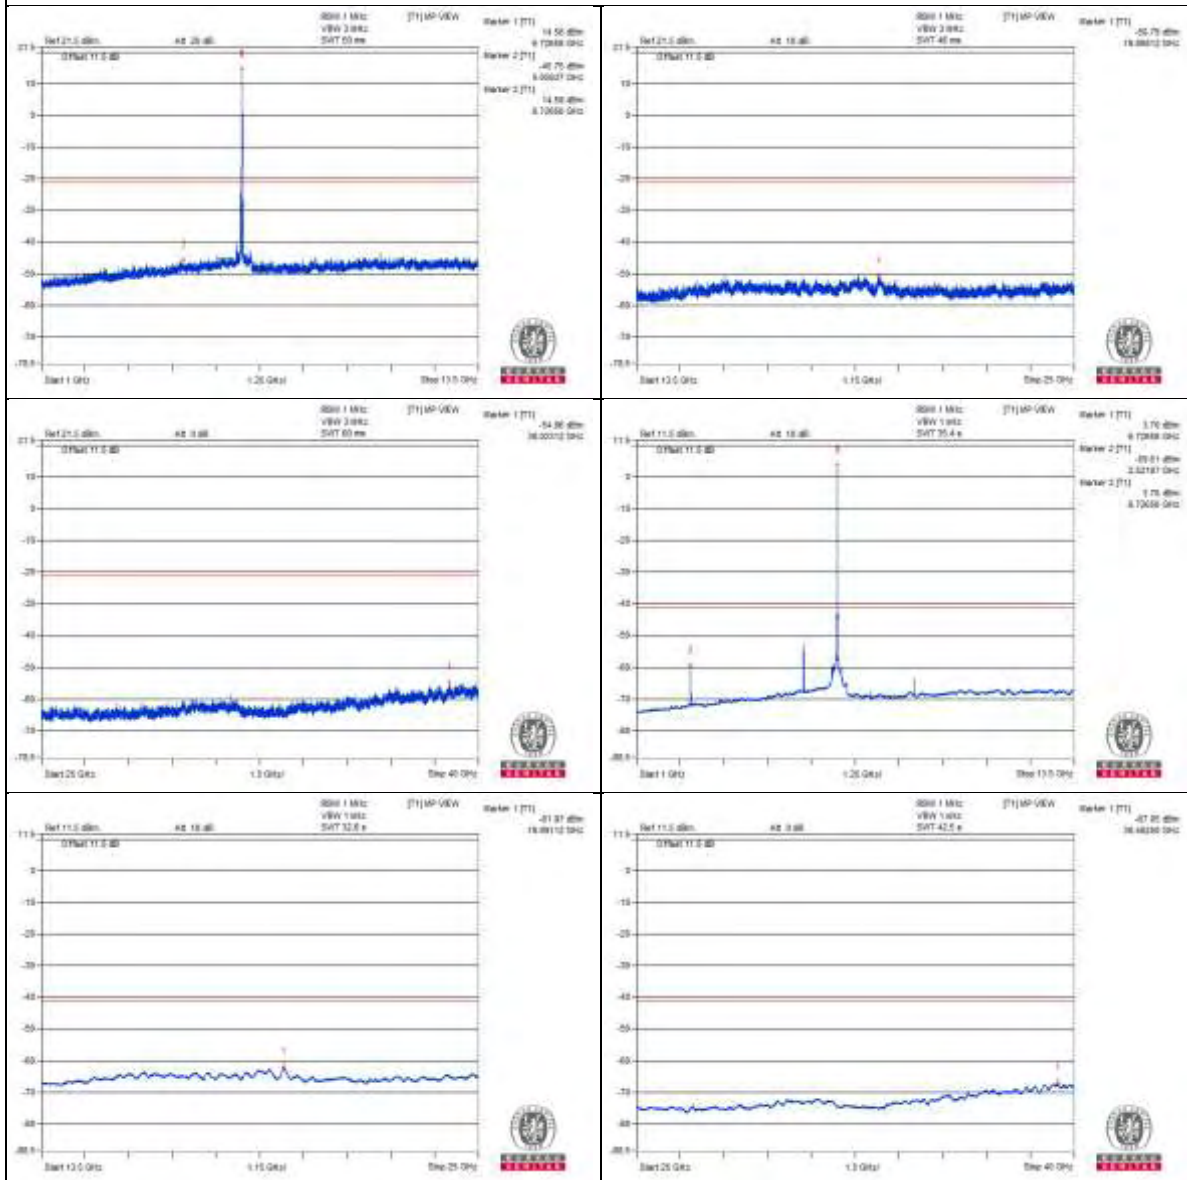

Channel 179

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	2635.93 PK	57.3	74	-16.7	-49.06	-49.22	8.17	-37.96
2	2637.5 AV	41.78	54	-12.22	-64.54	-64.78	8.17	-53.48
3	5485.93 PK	58.86	88.2	-29.34	-47.47	-47.69	8.17	-36.4
4	5482.81 AV	38.44	68.2	-29.76	-67.69	-68.34	8.17	-56.82
5	5759.37 PK	61.72	88.2	-26.48	-44.65	-44.8	8.17	-33.54
6	5759.37 AV	54.92	68.2	-13.28	-51.13	-51.94	8.17	-40.34
7	9131.25 PK	59.89	74	-14.11	-46.02	-47.16	8.17	-35.37
8	9126.56 AV	41.1	54	-12.9	-64.81	-65.94	8.17	-54.16
9	13685.43 PK	52.61	88.2	-35.59	-53.32	-54.41	8.17	-42.65
10	13685.43 AV	41.92	68.2	-26.28	-64.25	-64.8	8.17	-53.34
11	20530.81 PK	50.47	74	-23.53	-56.8	-55.27	8.17	-44.79
12	20532.25 AV	40.58	54	-13.42	-65.67	-66.05	8.17	-54.68

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

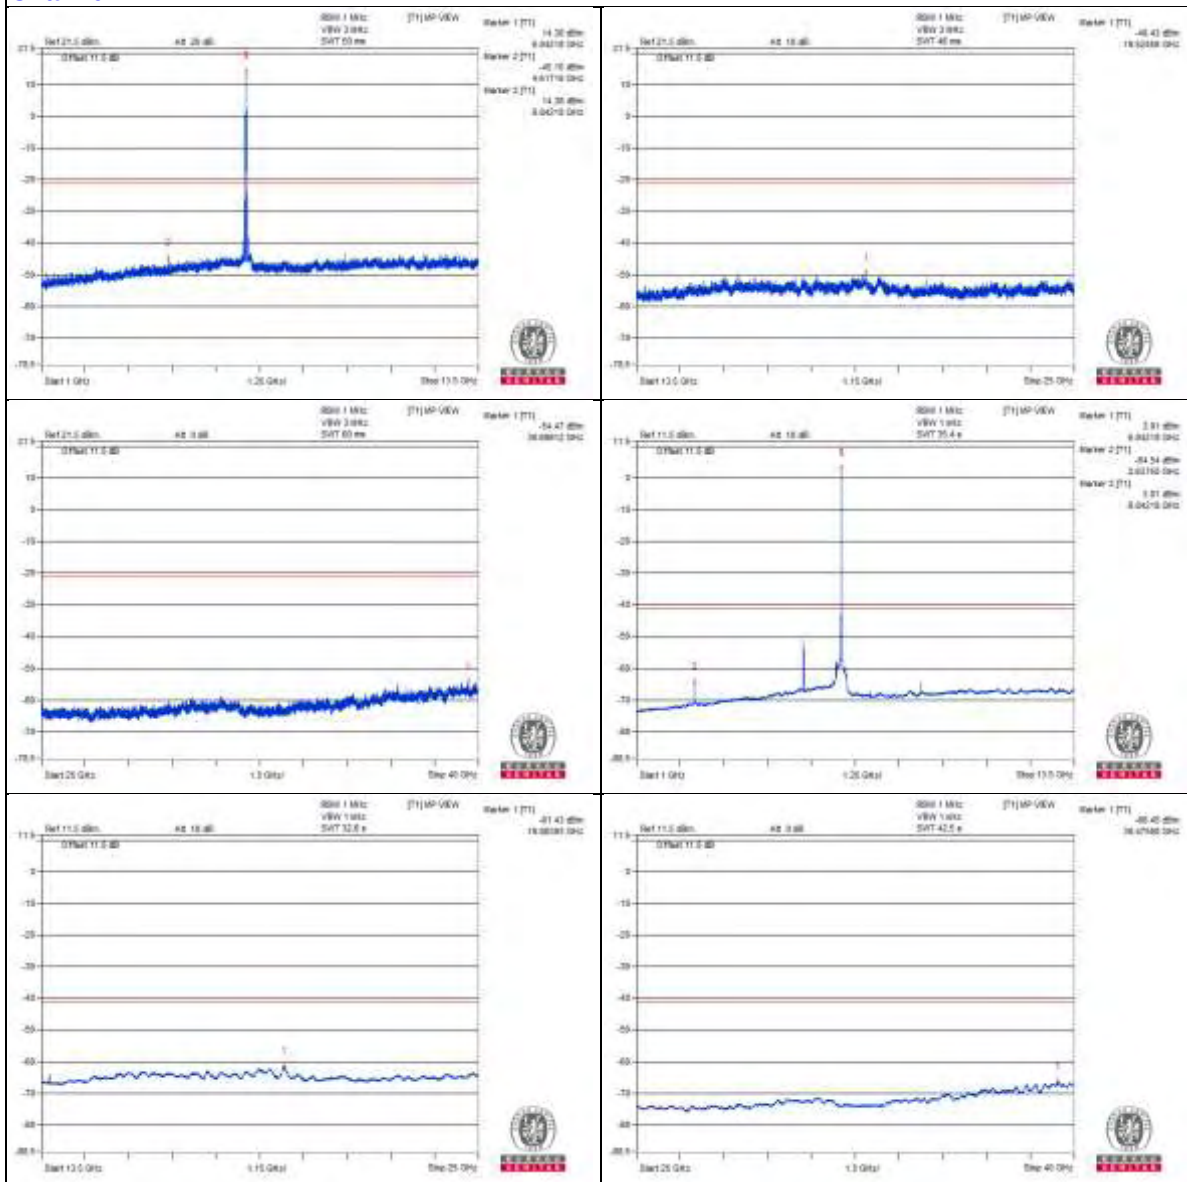

Chain 1

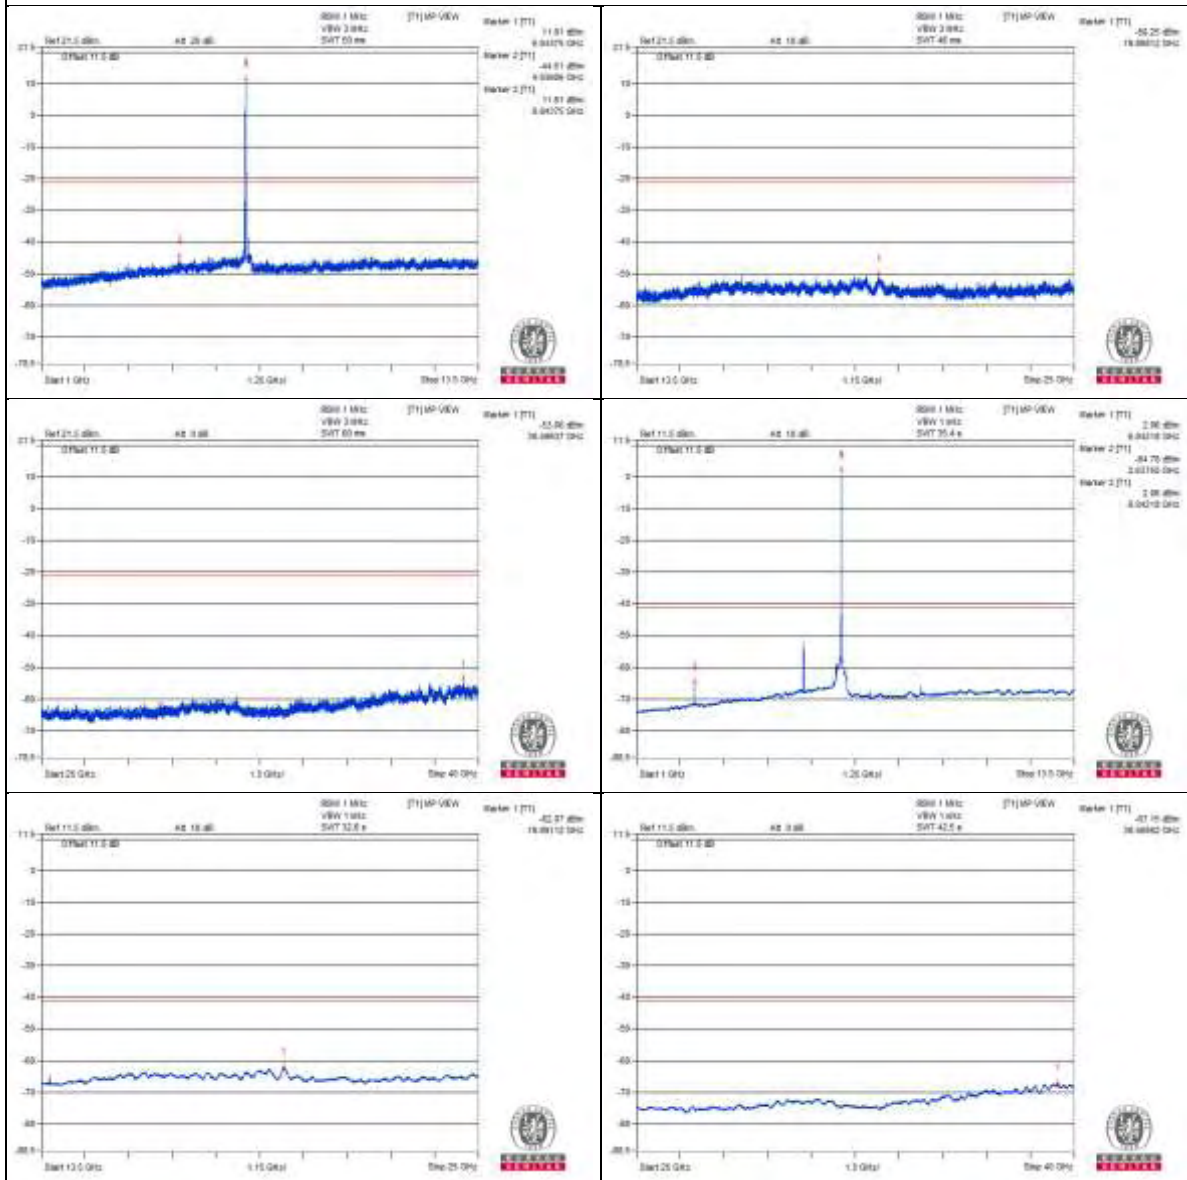

Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	7204.5 PK	60.47	88.2	-27.73	-46.31	-45.65	8.17	-34.79
2	7206.9 AV	47.06	68.2	-21.14	-59.4	-59.37	8.17	-48.2


Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

* The unwanted emission was verified and the test result was passed by radiated measurement.

Chain 0

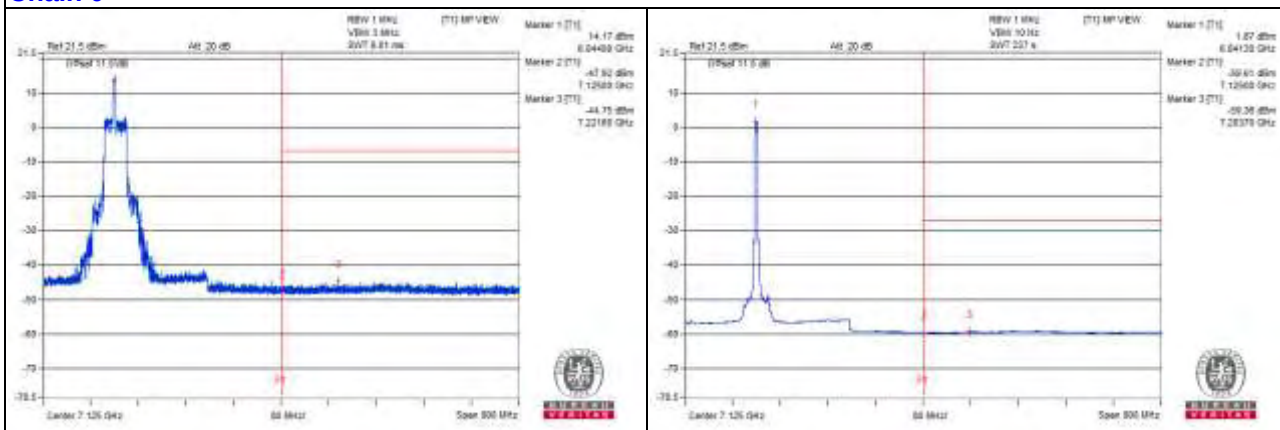

Chain 1

