

RU106

Channel 3

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	1756.25 PK	54.24	74	-19.76	-52.64	-51.81	8.17	-41.02
2	1764.06 AV	45.31	54	-8.69	-60.89	-61.38	8.17	-49.95
3	5487.5 PK	58.95	88.2	-29.25	-46.71	-48.43	8.17	-36.31
4	5487.5 AV	39.72	68.2	-28.48	-65.98	-67.61	8.17	-55.54
5	5759.37 PK	62.57	88.2	-25.63	-43.39	-44.41	8.17	-32.69
6	5759.37 AV	55.17	68.2	-13.03	-52.1	-50.57	8.17	-40.09
7	7953.12 PK	59.75	88.2	-28.45	-47.39	-46.09	8.17	-35.51
8	7953.12 AV	44.98	68.2	-23.22	-60.1	-63.46	8.17	-50.28
9	11929.68 PK	59.56	74	-14.44	-46.84	-46.92	8.17	-35.7
10	11932.81 AV	39.3	54	-14.7	-67.68	-66.66	8.17	-55.96
11	17893 PK	54.55	74	-19.45	-52.54	-51.33	8.17	-40.71
12	17895.87 AV	42.44	54	-11.56	-64.05	-63.96	8.17	-52.82

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

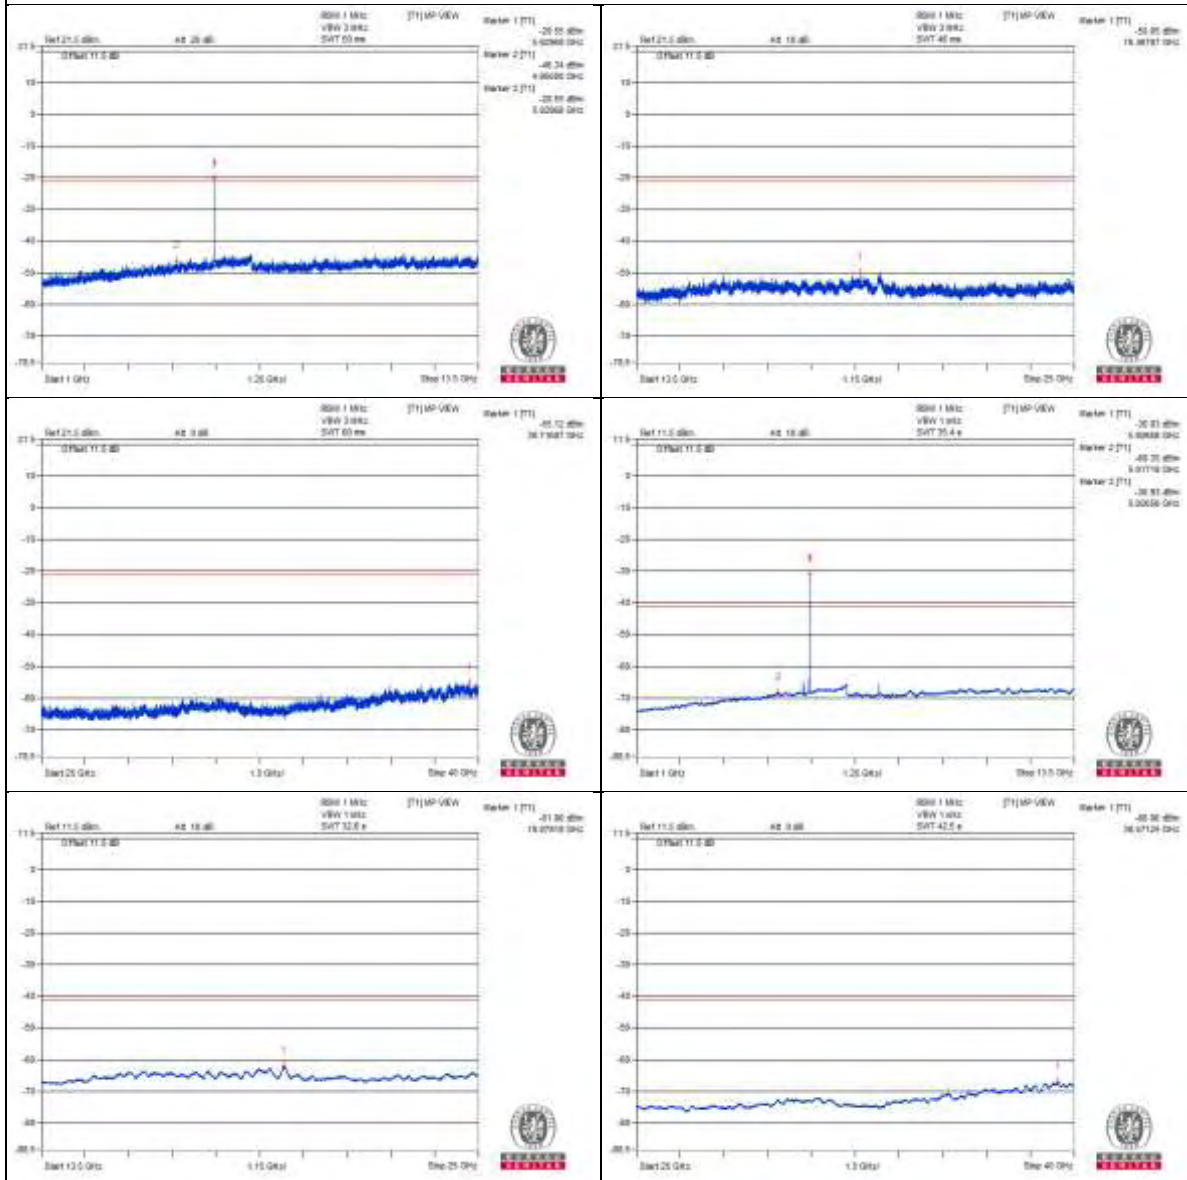

Chain 1

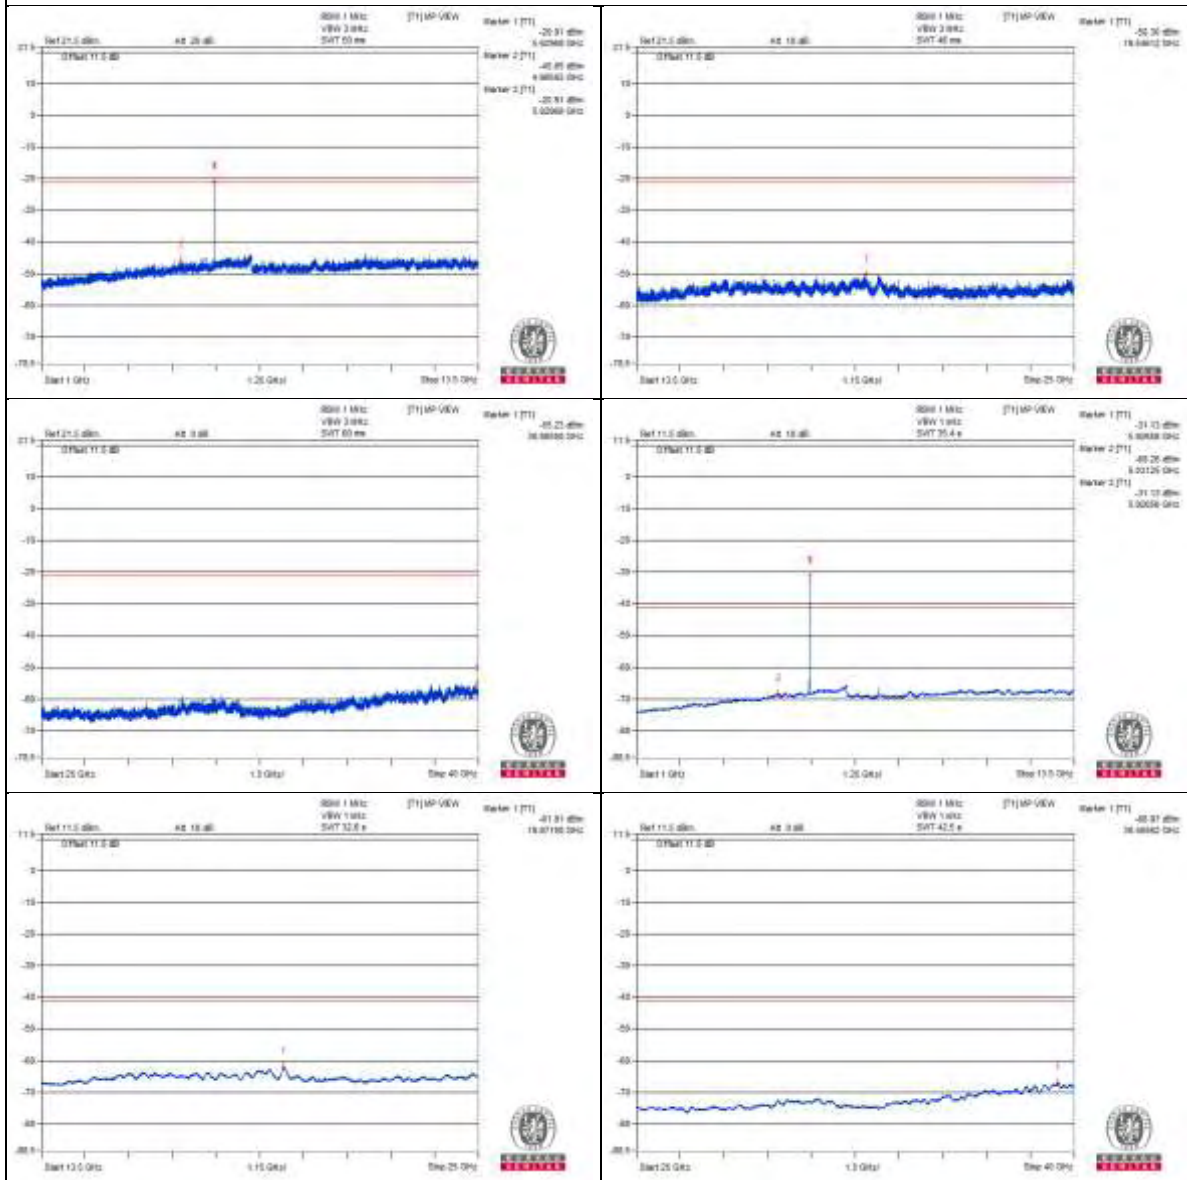

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5924.45 PK	79.28	88.2	-8.92	-25.37	-30.16	8.15	-15.98
2	5889.6 AV	57.87	68.2	-10.33	-48.56	-48.55	8.15	-37.39

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

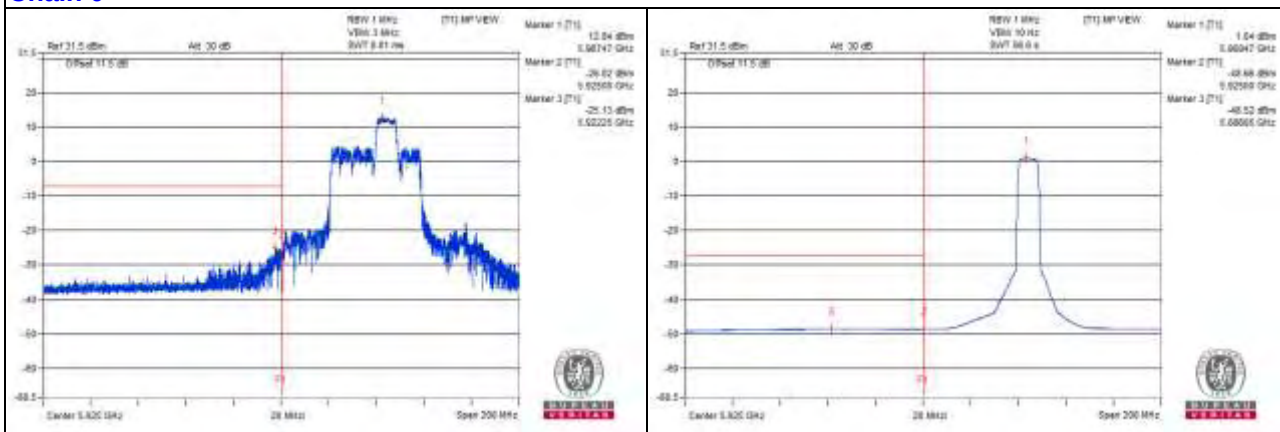

Chain 1

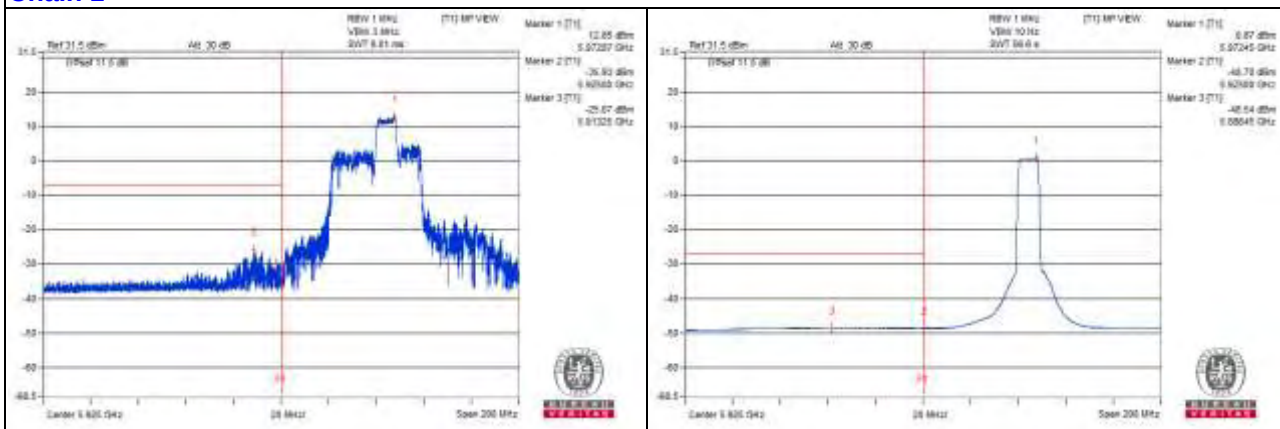

Channel 43

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	1957.81 PK	55.47	74	-18.53	-52.34	-49.93	8.17	-39.79
2	1964.06 AV	46.21	54	-7.79	-60.26	-60.21	8.17	-49.05
3	5487.5 PK	59.13	88.2	-29.07	-46.82	-47.86	8.17	-36.13
4	5481.25 AV	39.77	68.2	-28.43	-66.65	-66.69	8.17	-55.49
5	5759.37 PK	64.4	88.2	-23.8	-41.45	-42.73	8.17	-30.86
6	5759.37 AV	59.91	68.2	-8.29	-46.48	-46.58	8.17	-35.35
7	8218.75 PK	58.87	74	-15.13	-48.15	-47.06	8.17	-36.39
8	8220.31 AV	45.5	54	-8.5	-60.9	-60.98	8.17	-49.76
9	12326.56 PK	60.42	74	-13.58	-44.96	-47.42	8.17	-34.84
10	12334.37 AV	39.06	54	-14.94	-67.38	-67.38	8.17	-56.2
11	18496.75 PK	52.76	74	-21.24	-53.7	-53.67	8.17	-42.5
12	18496.75 AV	41.6	54	-12.4	-64.7	-64.99	8.17	-53.66

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

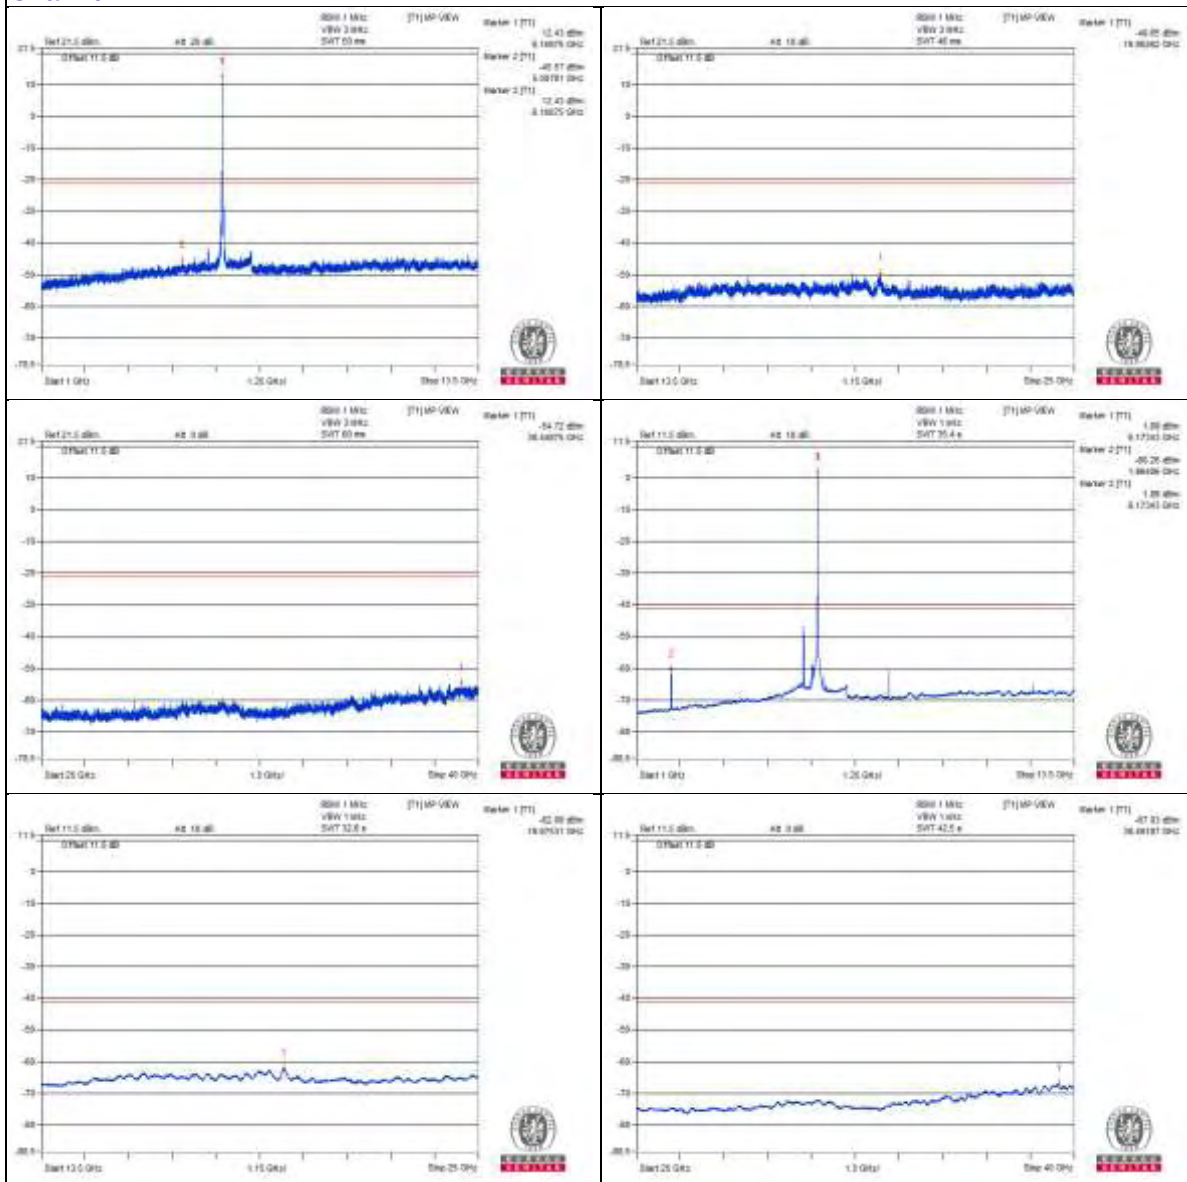

Chain 1

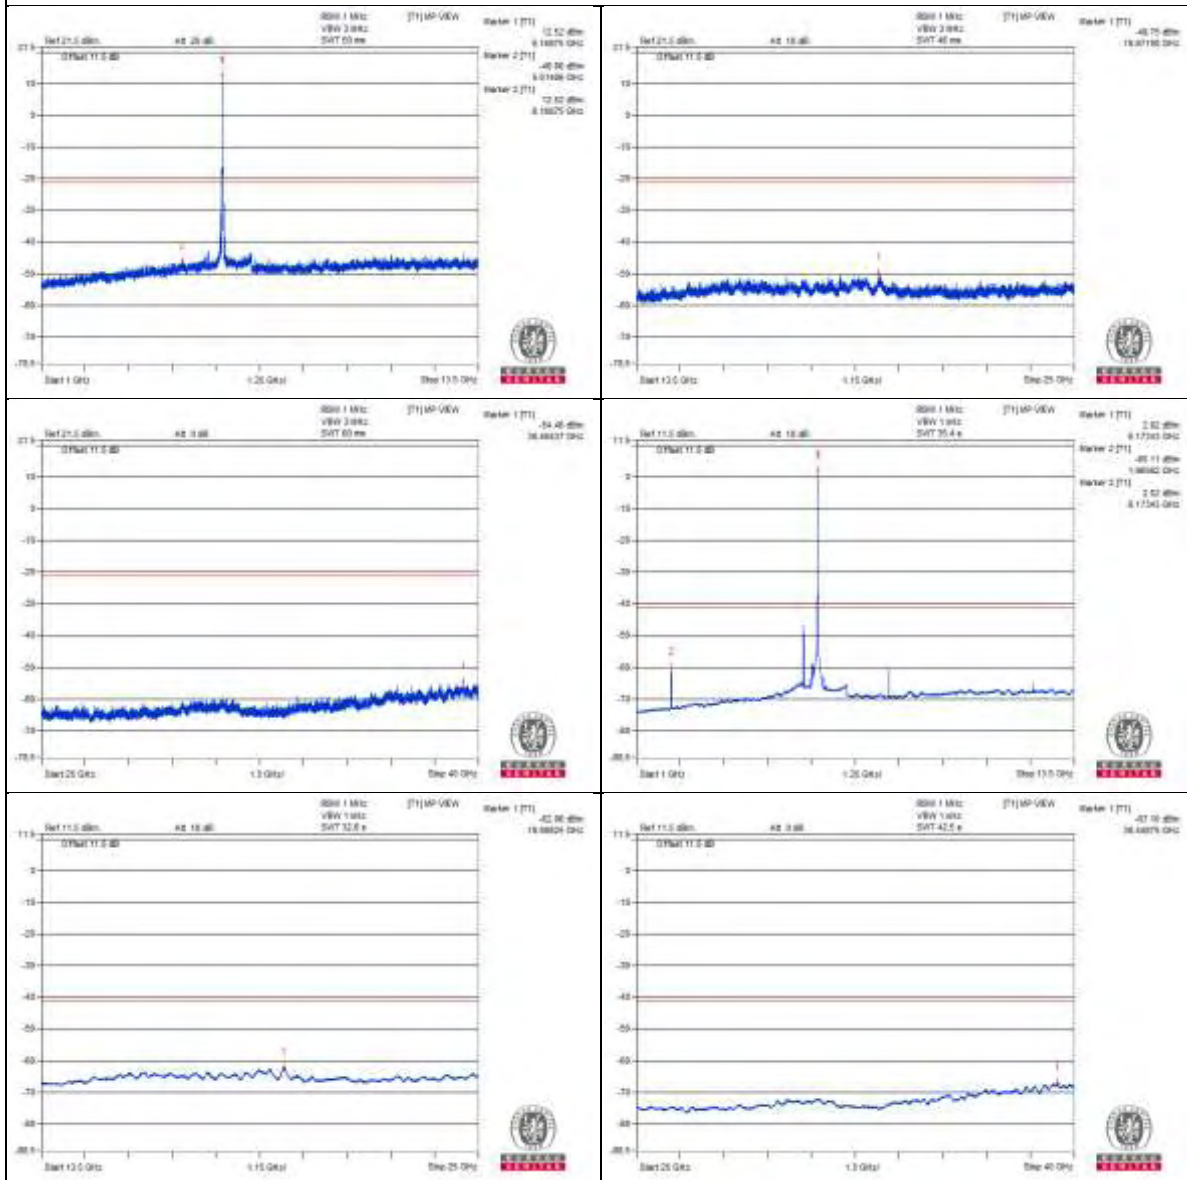

Channel 91

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	2204.68 PK	55.24	74	-18.76	-50.94	-51.47	8.17	-40.02
2	2204.68 AV	45.61	54	-8.39	-60.76	-60.91	8.17	-49.65
3	5487.5 PK	59.26	88.2	-28.94	-46.36	-48.19	8.17	-36
4	5482.81 AV	38.24	68.2	-29.96	-68.15	-68.26	8.17	-57.02
5	5759.37 PK	59.92	88.2	-28.28	-46.8	-46.26	8.17	-35.34
6	5759.37 AV	51.32	68.2	-16.88	-55.17	-55.08	8.17	-43.94
7	8540.62 PK	59.23	88.2	-28.97	-47.32	-47.1	8.17	-36.03
8	8540.62 AV	46.54	68.2	-21.66	-59.92	-59.89	8.17	-48.72
9	12806.25 PK	60.18	88.2	-28.02	-45.6	-47.03	8.17	-35.08
10	12807.81 AV	39.17	68.2	-29.03	-67.2	-67.34	8.17	-56.09
11	19219.81 PK	53.73	74	-20.27	-52.22	-53.26	8.17	-41.53
12	19216.93 AV	43.2	54	-10.8	-63.34	-63.15	8.17	-52.06

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

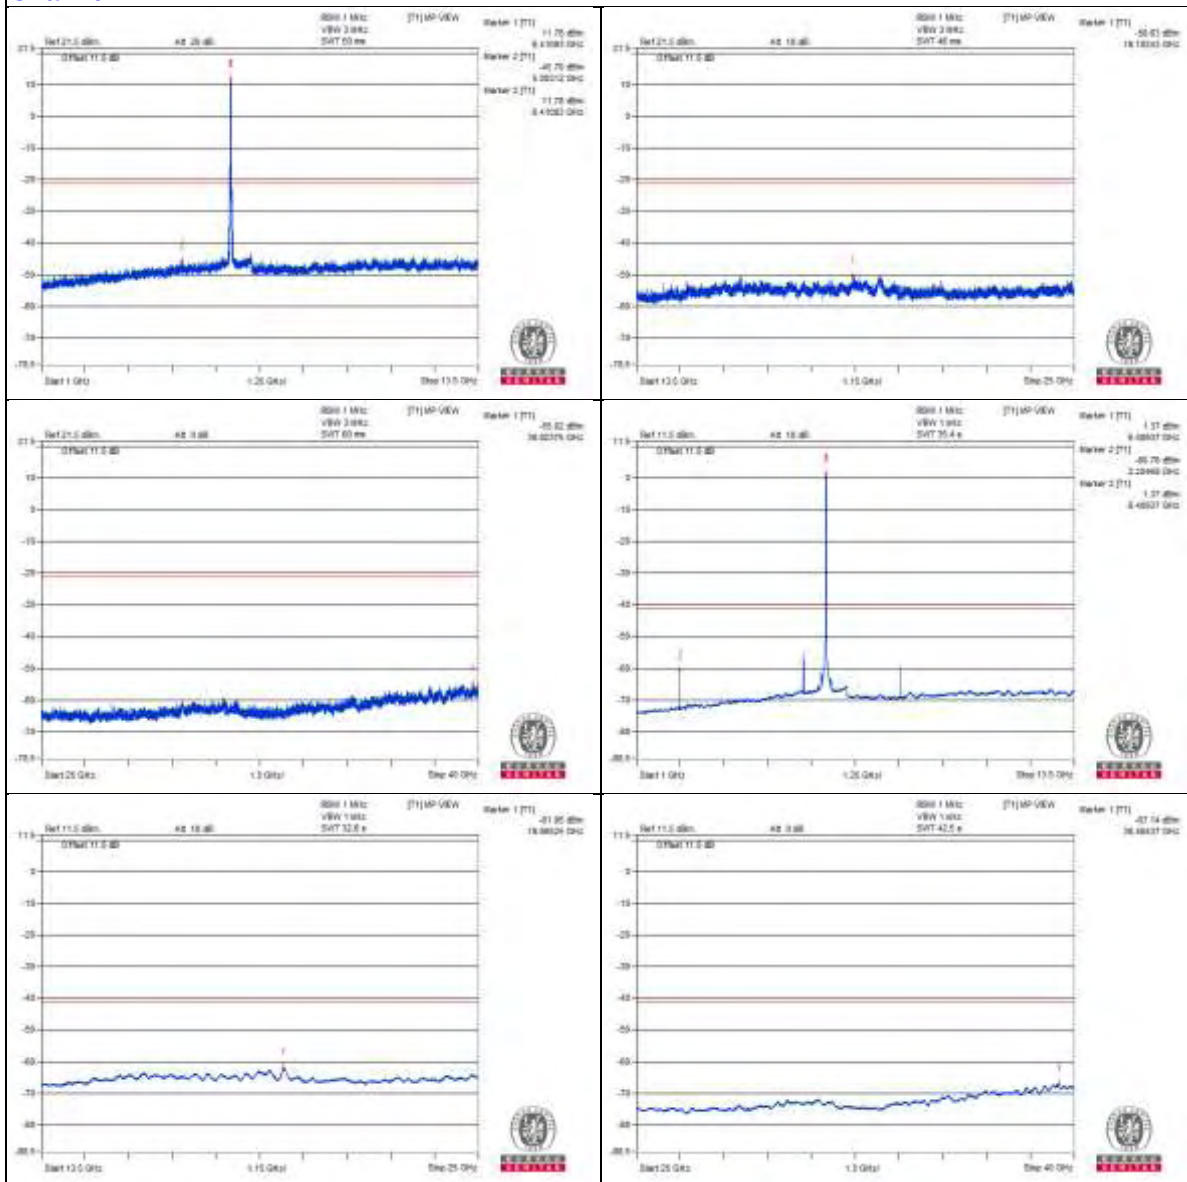

Chain 1

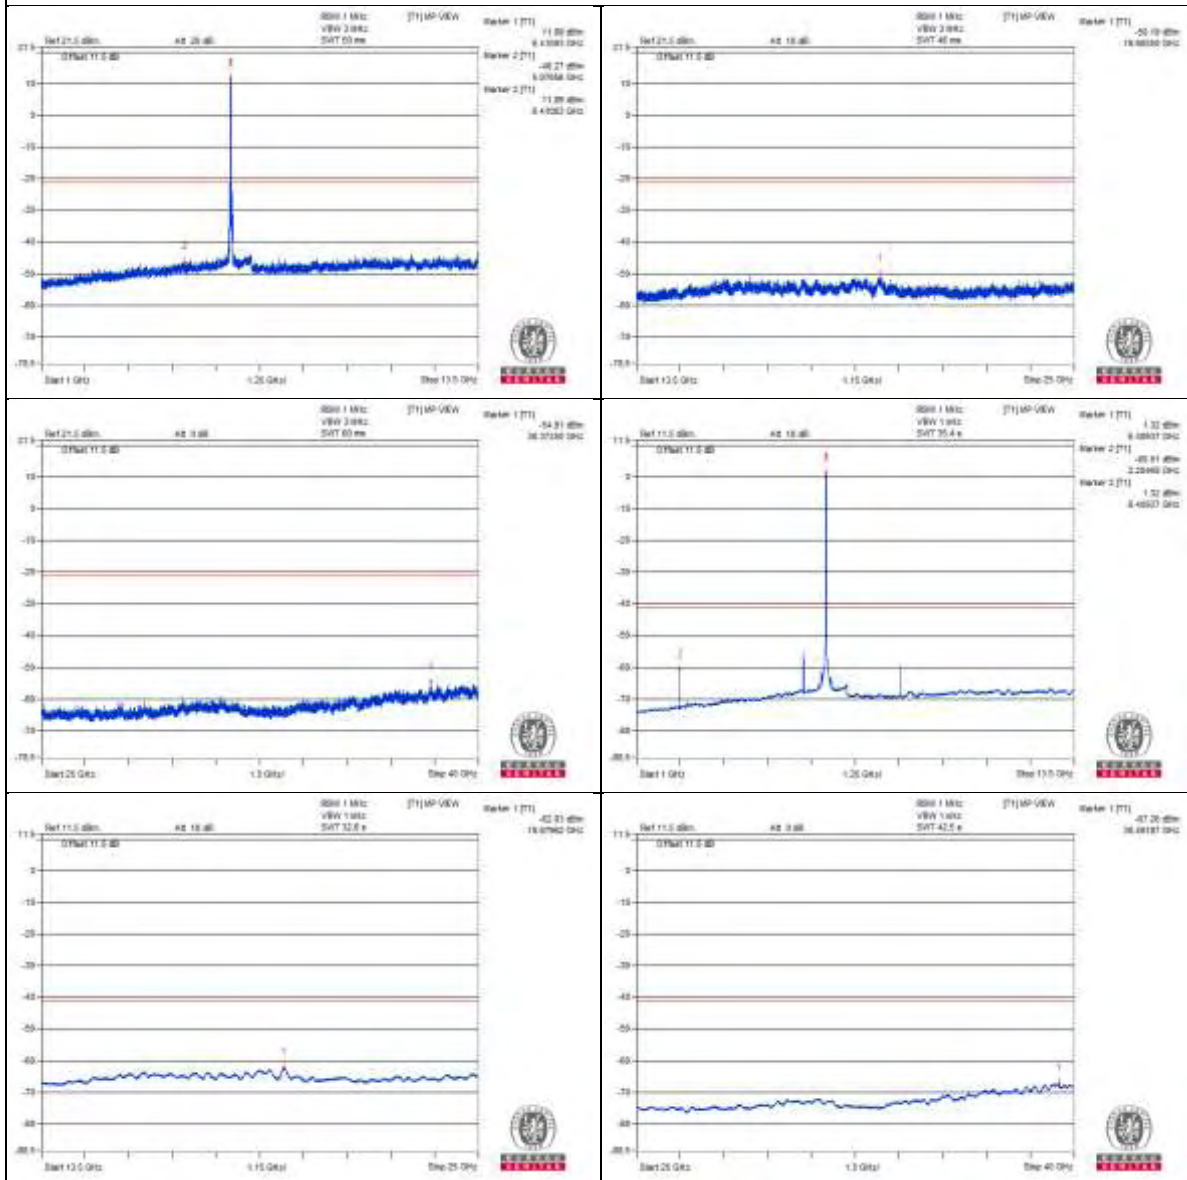

Channel 123

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	2360.93 PK	56.26	74	-17.74	-49.35	-51.2	8.17	-39
2	2364.06 AV	47.35	54	-6.65	-58.7	-59.51	8.17	-47.91
3	5479.68 PK	59.17	88.2	-29.03	-47.09	-47.45	8.17	-36.09
4	5481.25 AV	38.21	68.2	-29.99	-68.28	-68.18	8.17	-57.05
5	5759.37 PK	60.51	88.2	-27.69	-46.12	-45.74	8.17	-34.75
6	5759.37 AV	51.63	68.2	-16.57	-55.12	-54.52	8.17	-43.63
7	8753.12 PK	60.13	88.2	-28.07	-46.84	-45.83	8.17	-35.13
8	8753.12 AV	47.07	68.2	-21.13	-59.33	-59.41	8.17	-48.19
9	13132.81 PK	59.88	88.2	-28.32	-46	-47.21	8.17	-35.38
10	13134.37 AV	39.27	68.2	-28.93	-67.03	-67.32	8.17	-55.99
11	19697.06 PK	51.76	74	-22.24	-54.46	-54.91	8.17	-43.5
12	19695.62 AV	40.66	54	-13.34	-66	-65.57	8.17	-54.6

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

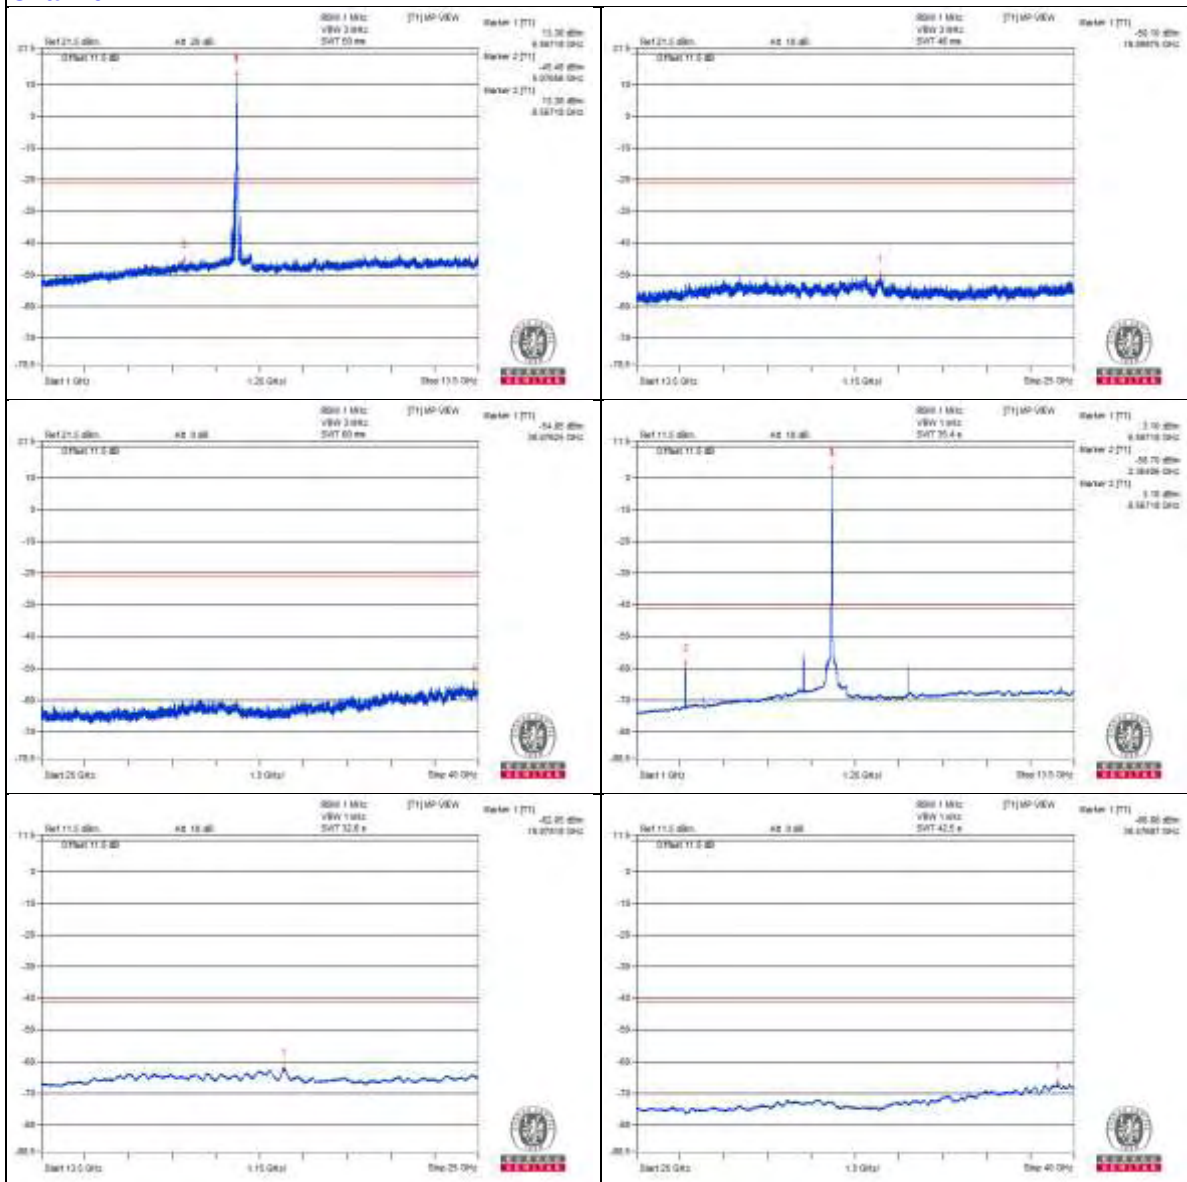

Chain 1

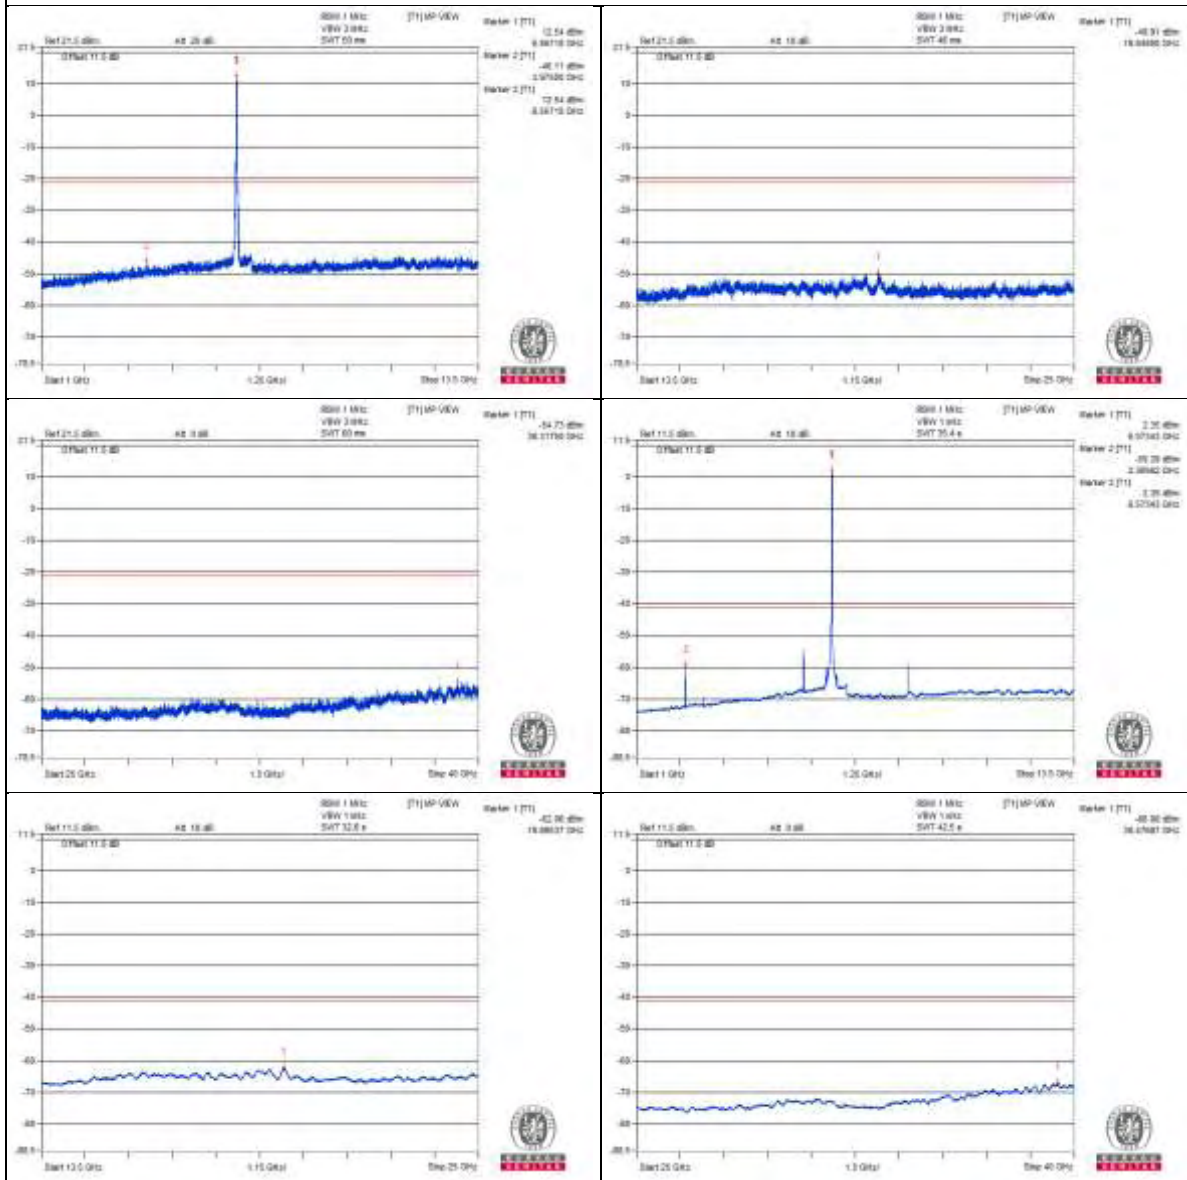

Channel 155

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	2521.87 PK	56.36	74	-17.64	-51.04	-49.29	8.17	-38.9
2	2523.43 AV	46.12	54	-7.88	-60.39	-60.25	8.17	-49.14
3	5479.68 PK	58.52	88.2	-29.68	-47.91	-47.94	8.17	-36.74
4	5479.68 AV	38.37	68.2	-29.83	-67.99	-68.16	8.17	-56.89
5	5759.37 PK	61.56	88.2	-26.64	-45.43	-44.39	8.17	-33.7
6	5759.37 AV	53.96	68.2	-14.24	-52.44	-52.52	8.17	-41.3
7	8967.18 PK	58.91	88.2	-29.29	-48.08	-47.05	8.17	-36.35
8	8967.18 AV	42.96	68.2	-25.24	-63.55	-63.42	8.17	-52.3
9	13446.87 PK	59.59	88.2	-28.61	-46.13	-47.71	8.17	-35.67
10	13451.56 AV	38.75	68.2	-29.45	-67.73	-67.66	8.17	-56.51
11	20175.75 PK	51.58	74	-22.42	-54.64	-55.09	8.17	-43.68
12	20174.31 AV	41.31	54	-12.69	-65.19	-65.08	8.17	-53.95

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

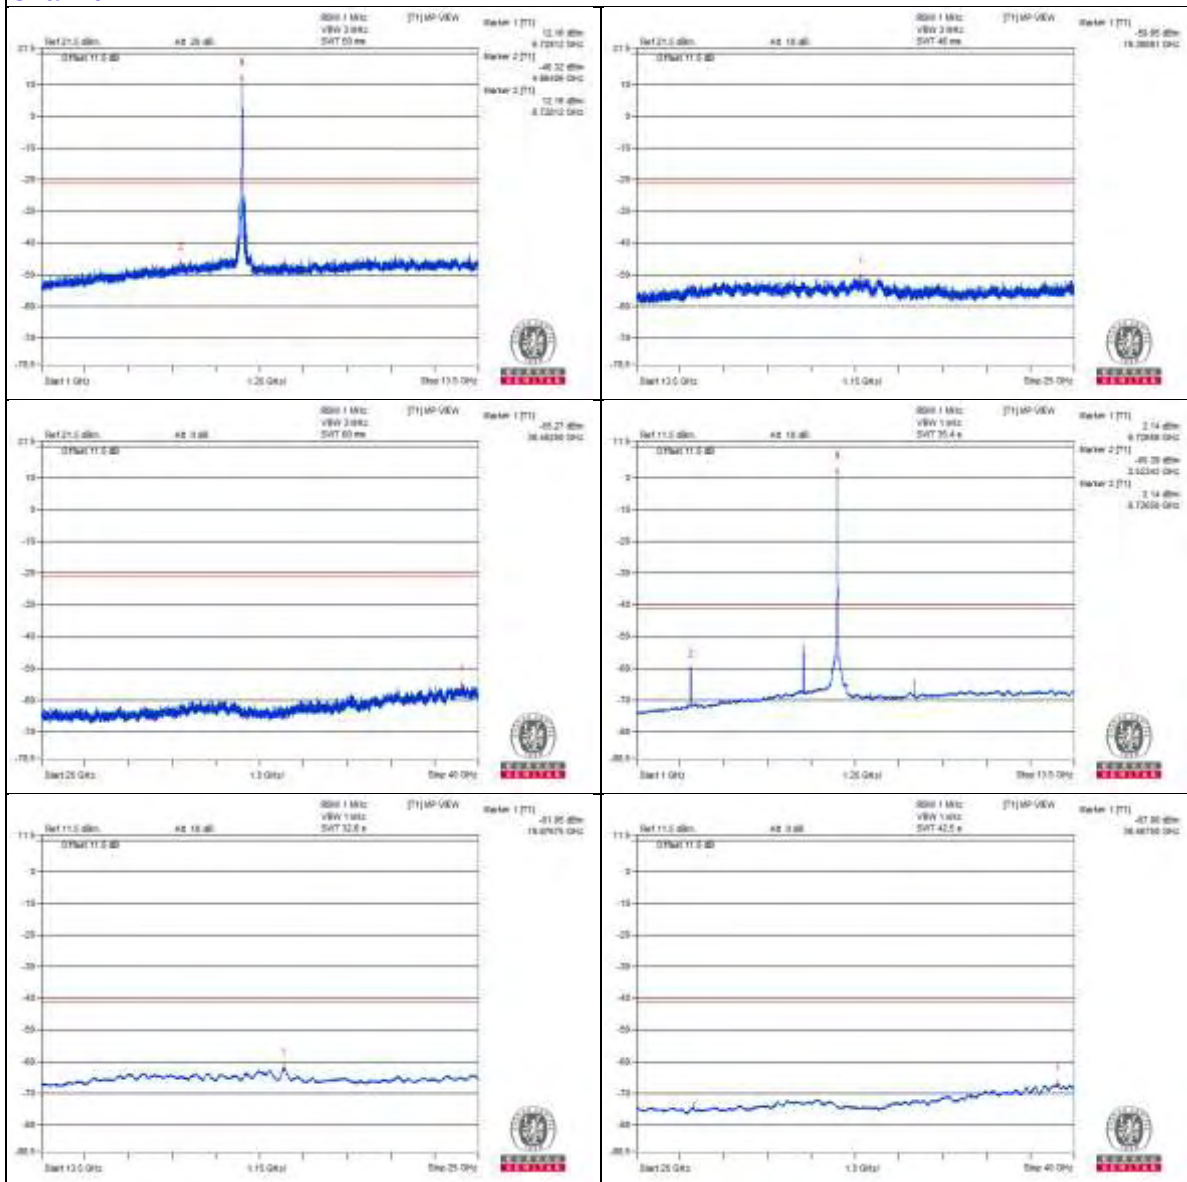

Chain 1

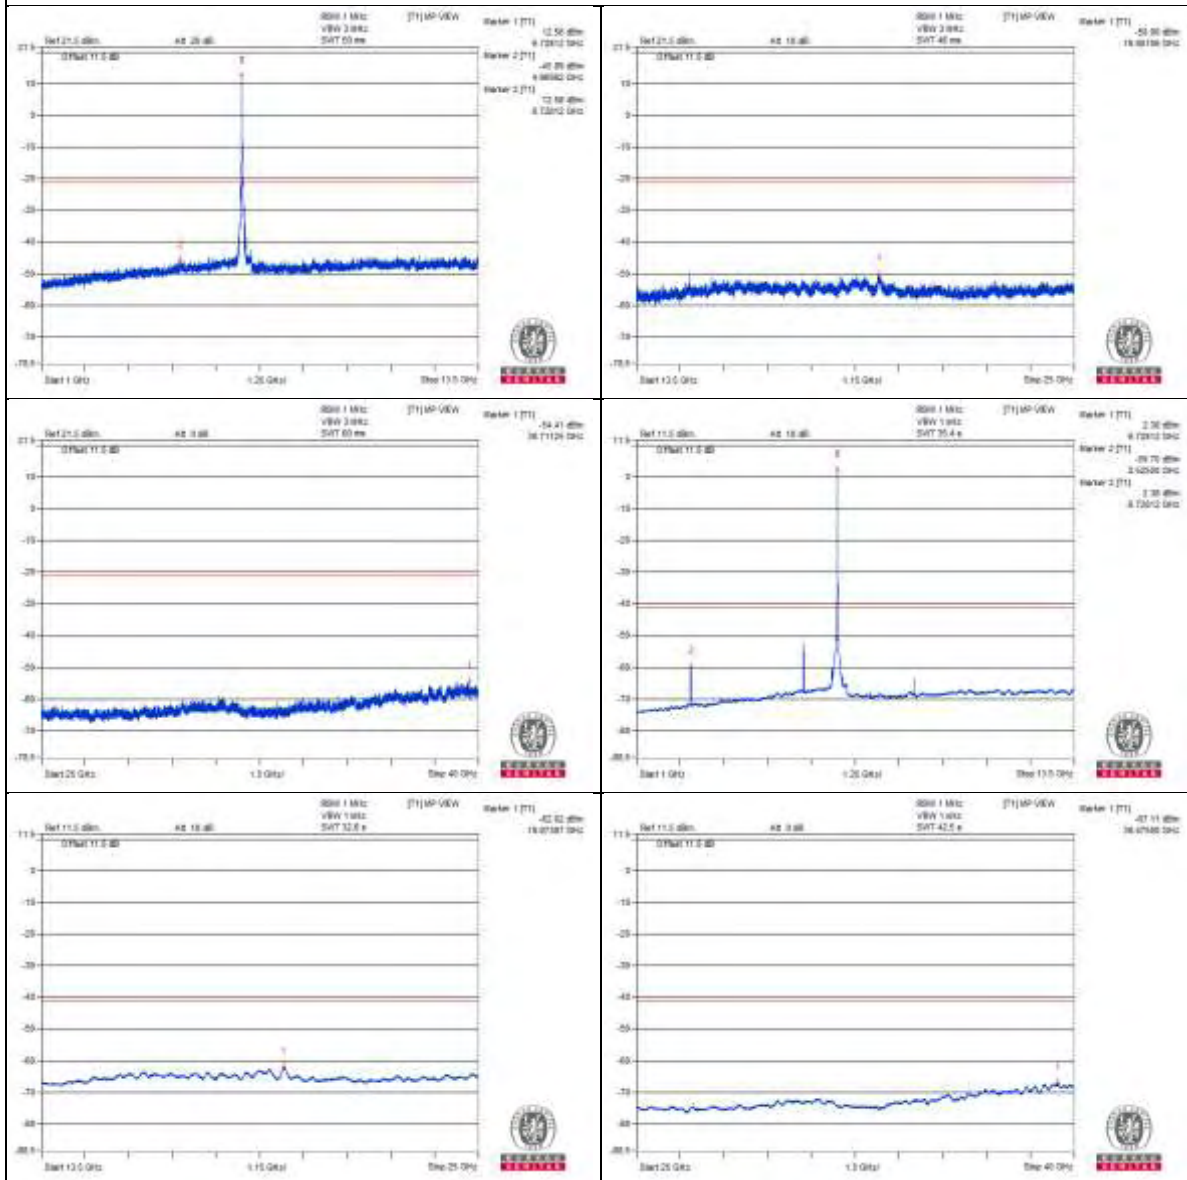

Channel 179

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	2640.62 PK	56.11	74	-17.89	-50.65	-50.04	8.17	-39.15
2	2635.93 AV	40.3	54	-13.7	-63.84	-71.35	8.17	-54.96
3	5485.93 PK	58.82	88.2	-29.38	-47.86	-47.4	8.17	-36.44
4	5481.25 AV	38.15	68.2	-30.05	-68.41	-68.17	8.17	-57.11
5	5759.37 PK	61.38	88.2	-26.82	-45.13	-45	8.17	-33.88
6	5759.37 AV	54.08	68.2	-14.12	-52.43	-52.29	8.17	-41.18
7	9121.87 PK	59.01	74	-14.99	-47.04	-47.86	8.17	-36.25
8	9126.56 AV	39.8	54	-14.2	-66.55	-66.74	8.17	-55.46
9	13694.06 PK	49.83	88.2	-38.37	-57.01	-56.25	8.17	-45.43
10	13685.43 AV	39.42	68.2	-28.78	-66.41	-67.73	8.17	-55.84
11	20538 PK	50.96	74	-23.04	-55.8	-55.19	8.17	-44.3
12	20533.68 AV	40.42	54	-13.58	-65.91	-66.14	8.17	-54.84

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

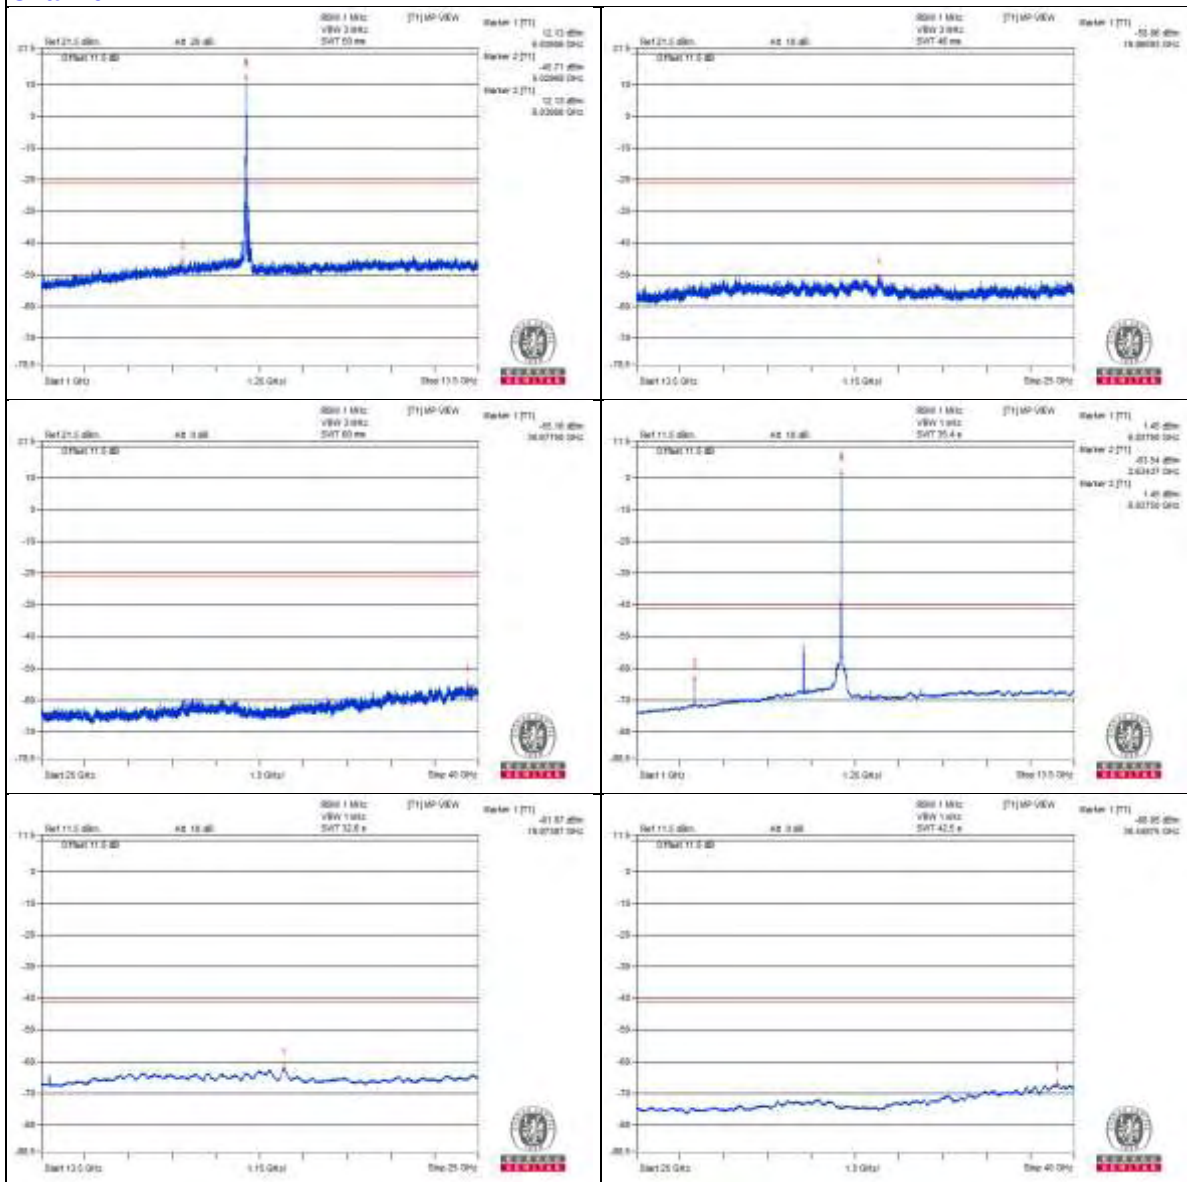

Chain 1

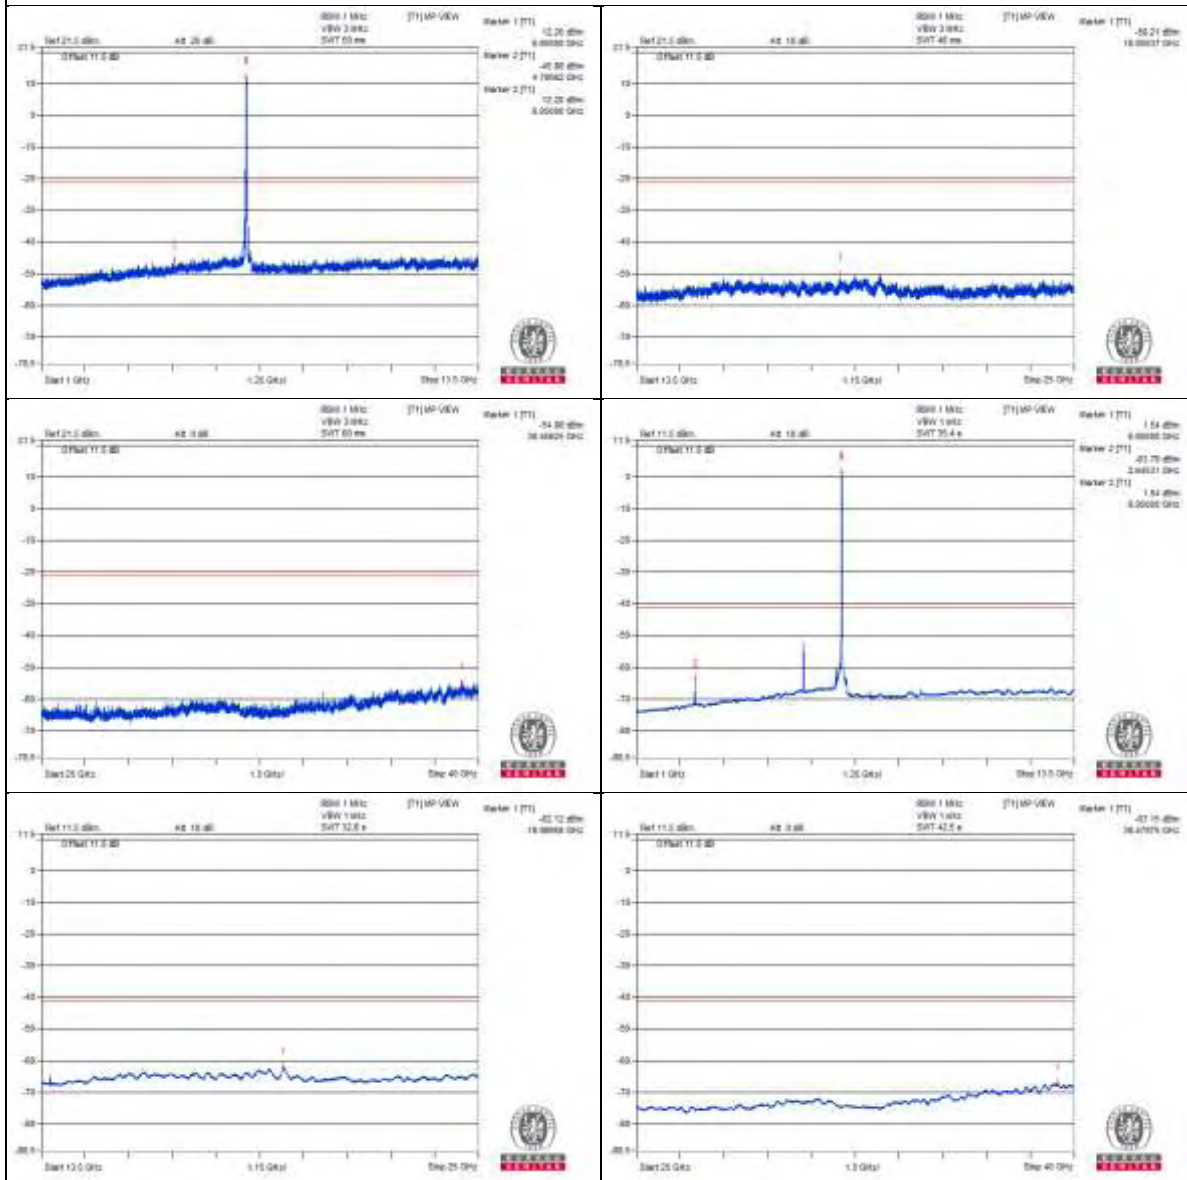

Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	7210.8 PK	60.28	88.2	-27.92	-47.12	-45.37	8.17	-34.98
2	7203.6 AV	47.07	68.2	-21.13	-59.38	-59.37	8.17	-48.19


Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8


d = measurement distance in 3 meters.

* The unwanted emission was verified and the test result was passed by radiated measurement.

Chain 0

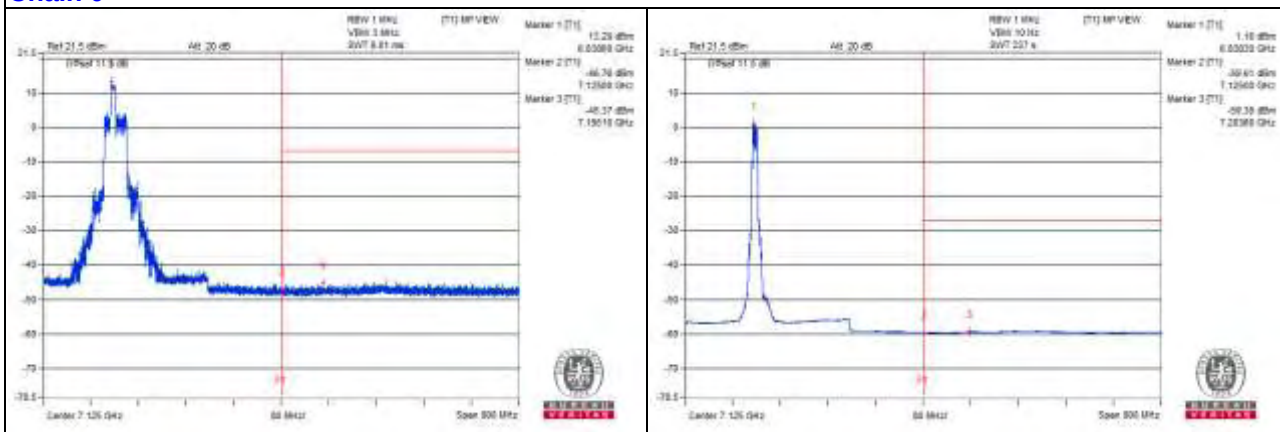

Chain 1

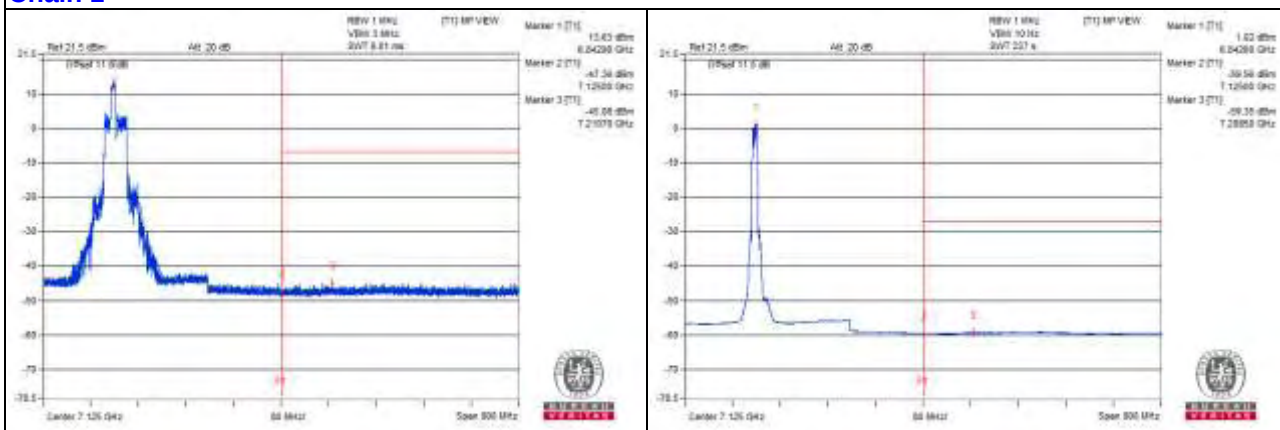

RU242

Channel 3

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	1757.81 PK	54.3	74	-19.7	-51.52	-52.87	8.17	-40.96
2	1764.06 AV	41.27	54	-12.73	-64.67	-65.73	8.17	-53.99
3	5485.93 PK	58.83	88.2	-29.37	-46.97	-48.35	8.17	-36.43
4	5487.5 AV	39.5	68.2	-28.7	-67.77	-66.25	8.17	-55.76
5	5759.37 PK	61.7	88.2	-26.5	-44.72	-44.76	8.17	-33.56
6	5759.37 AV	55.02	68.2	-13.18	-50.87	-52.04	8.17	-40.24
7	7956.25 PK	59.35	88.2	-28.85	-46.89	-47.29	8.17	-35.91
8	7953.12 AV	44.83	68.2	-23.37	-63.52	-60.29	8.17	-50.43
9	11932.81 PK	59.65	74	-14.35	-46.25	-47.41	8.17	-35.61
10	11925 AV	38.59	54	-15.41	-67.75	-67.96	8.17	-56.67
11	17894.43 PK	53.95	74	-20.05	-52.36	-52.62	8.17	-41.31
12	17898.75 AV	42.43	54	-11.57	-64.03	-64	8.17	-52.83

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

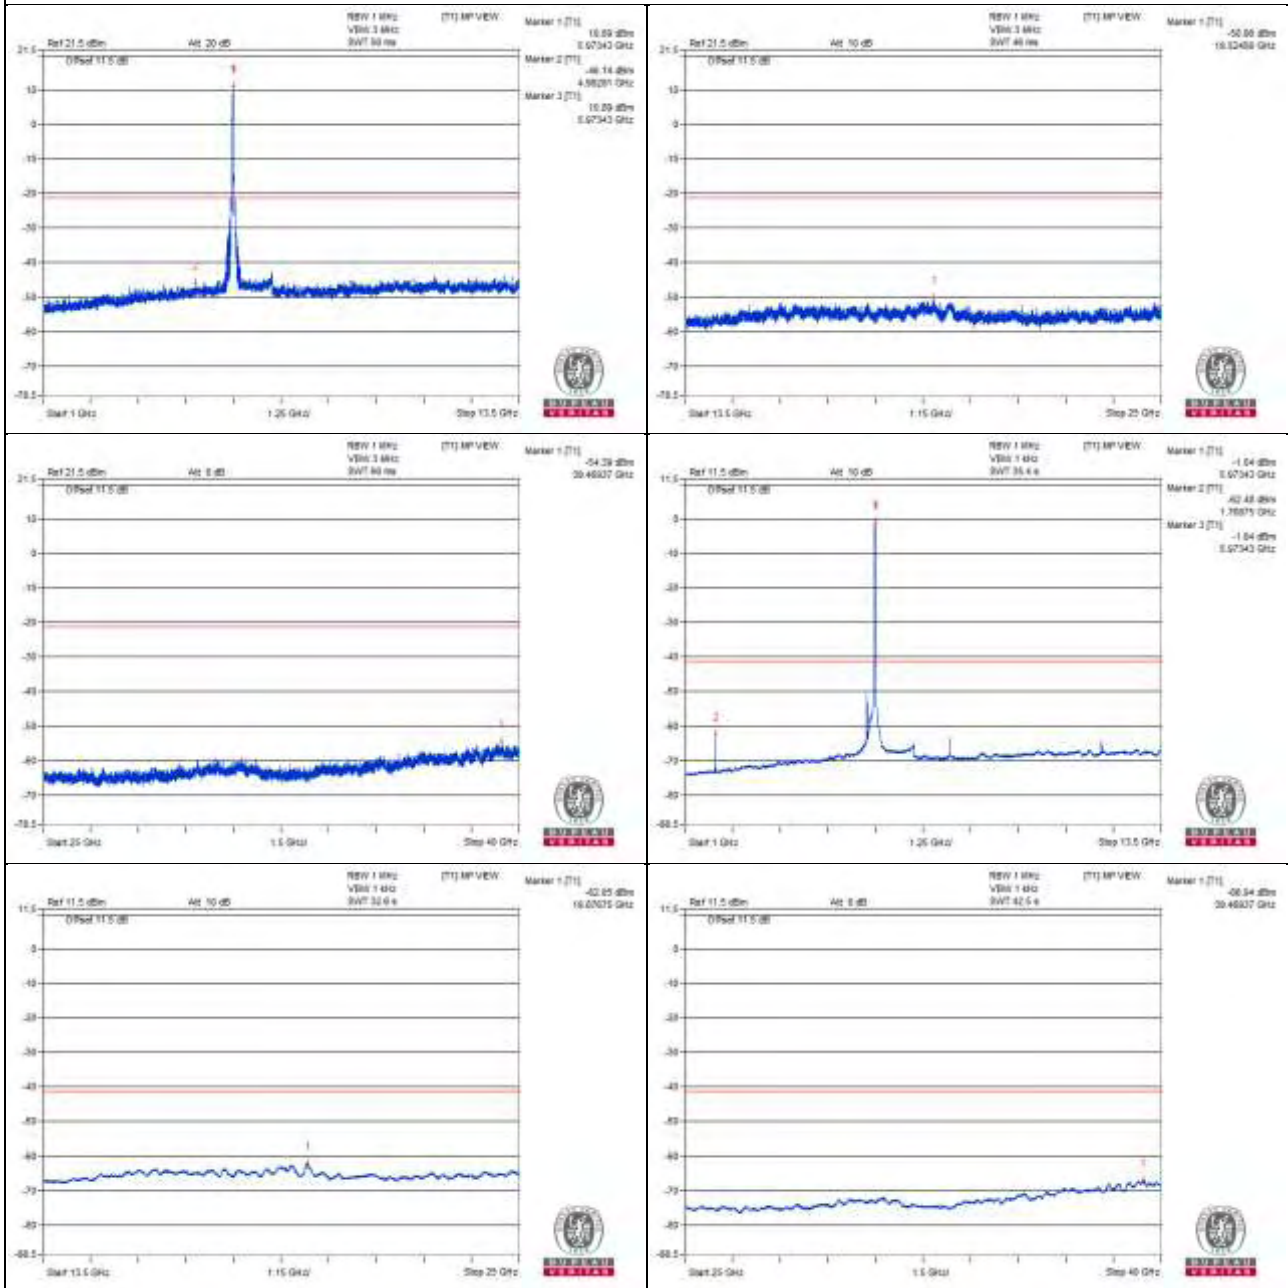

Chain 1

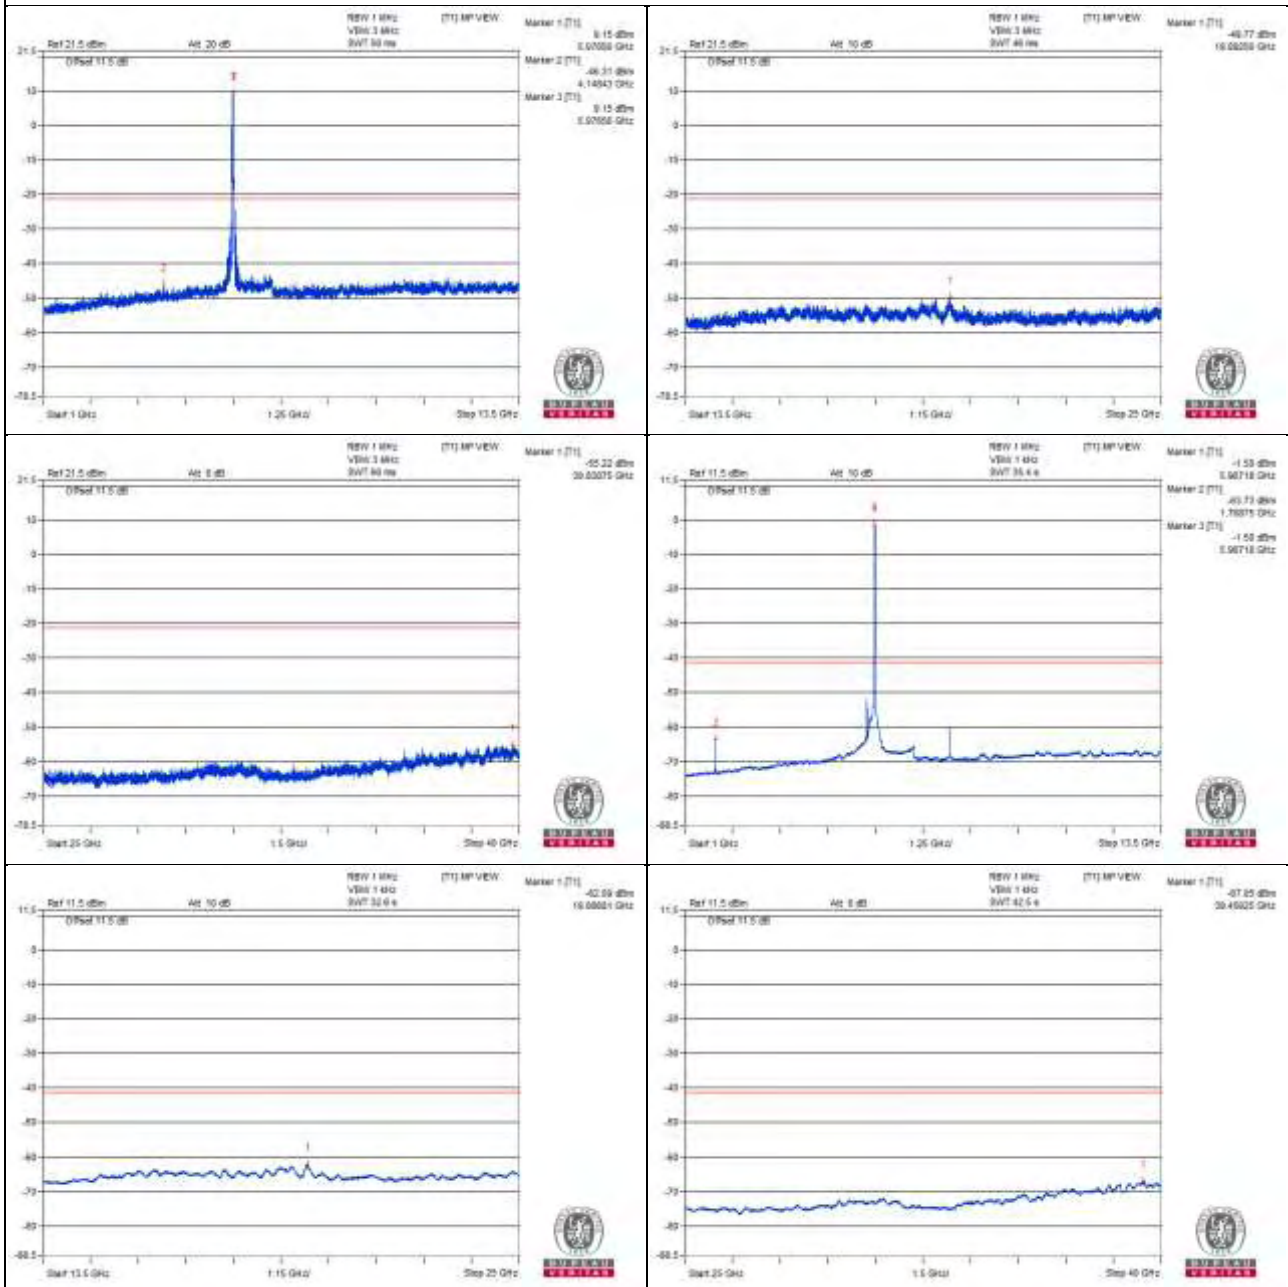

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5923.82 PK	85.37	88.2	-2.83	-18.69	-26.59	8.15	-9.89
2	5923.45 AV	58.61	68.2	-9.59	-47.58	-48.05	8.15	-36.65

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

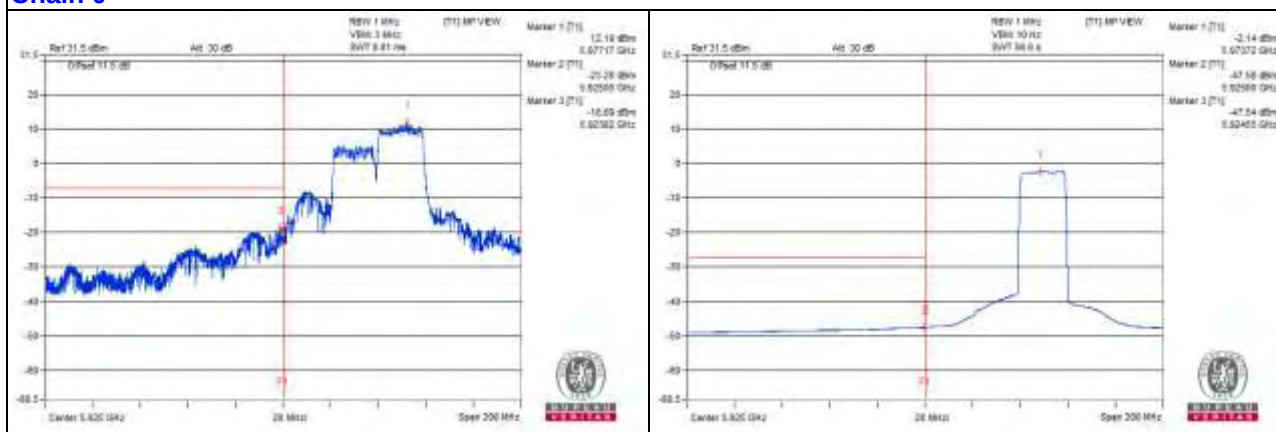

Chain 1

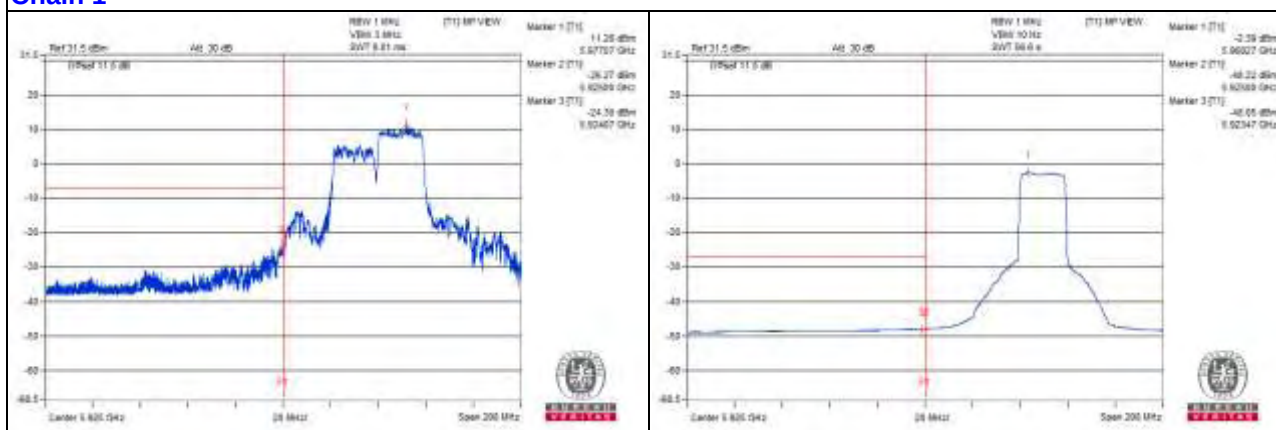

Channel 43

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	1957.81 PK	54.69	74	-19.31	-51.29	-52.26	8.17	-40.57
2	1956.25 AV	39.18	54	-14.82	-67.43	-67.09	8.17	-56.08
3	5479.68 PK	58.65	88.2	-29.55	-47.7	-47.89	8.17	-36.61
4	5485.93 AV	39.19	68.2	-29.01	-66.87	-67.66	8.17	-56.07
5	5759.37 PK	62.5	88.2	-25.7	-43.53	-44.39	8.17	-32.76
6	5759.37 AV	57.01	68.2	-11.19	-49.05	-49.84	8.17	-38.25
7	8223.43 PK	58.79	74	-15.21	-47.74	-47.57	8.17	-36.47
8	8220.31 AV	43.27	54	-10.73	-61.92	-64.93	8.17	-51.99
9	12331.25 PK	61.14	74	-12.86	-44.78	-45.9	8.17	-34.12
10	12325 AV	38.97	54	-15.03	-67.39	-67.56	8.17	-56.29
11	18491 PK	52.4	74	-21.6	-55.26	-53.09	8.17	-42.86
12	18492.43 AV	41.56	54	-12.44	-64.92	-64.84	8.17	-53.7

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

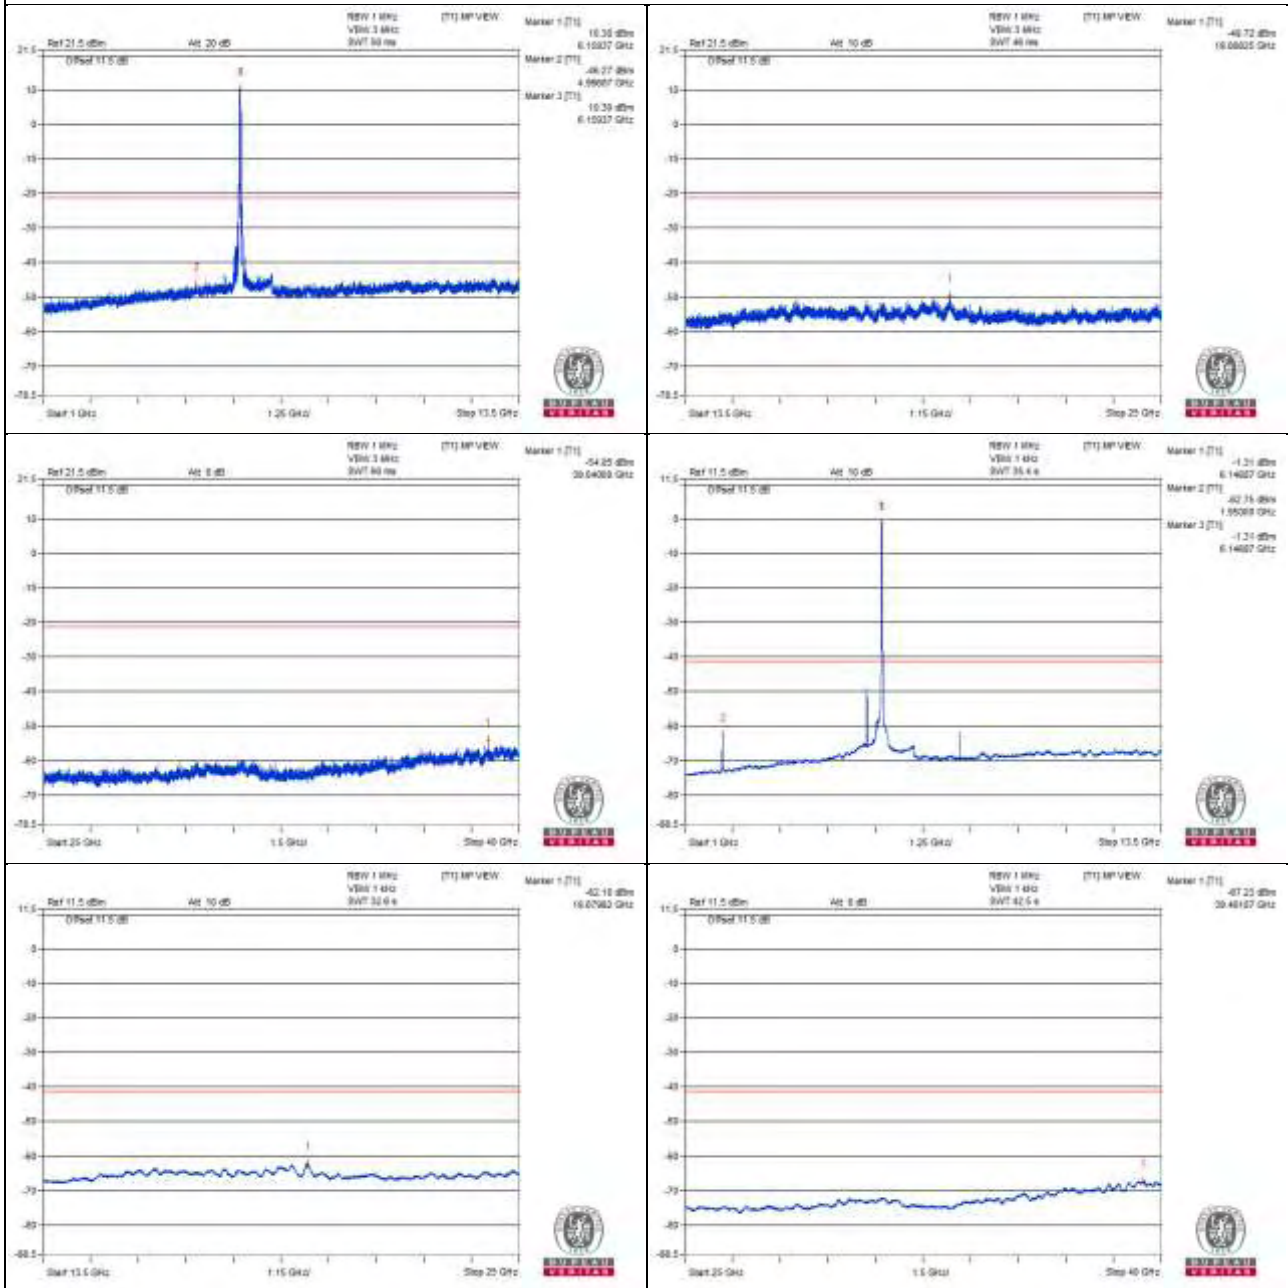

Chain 1

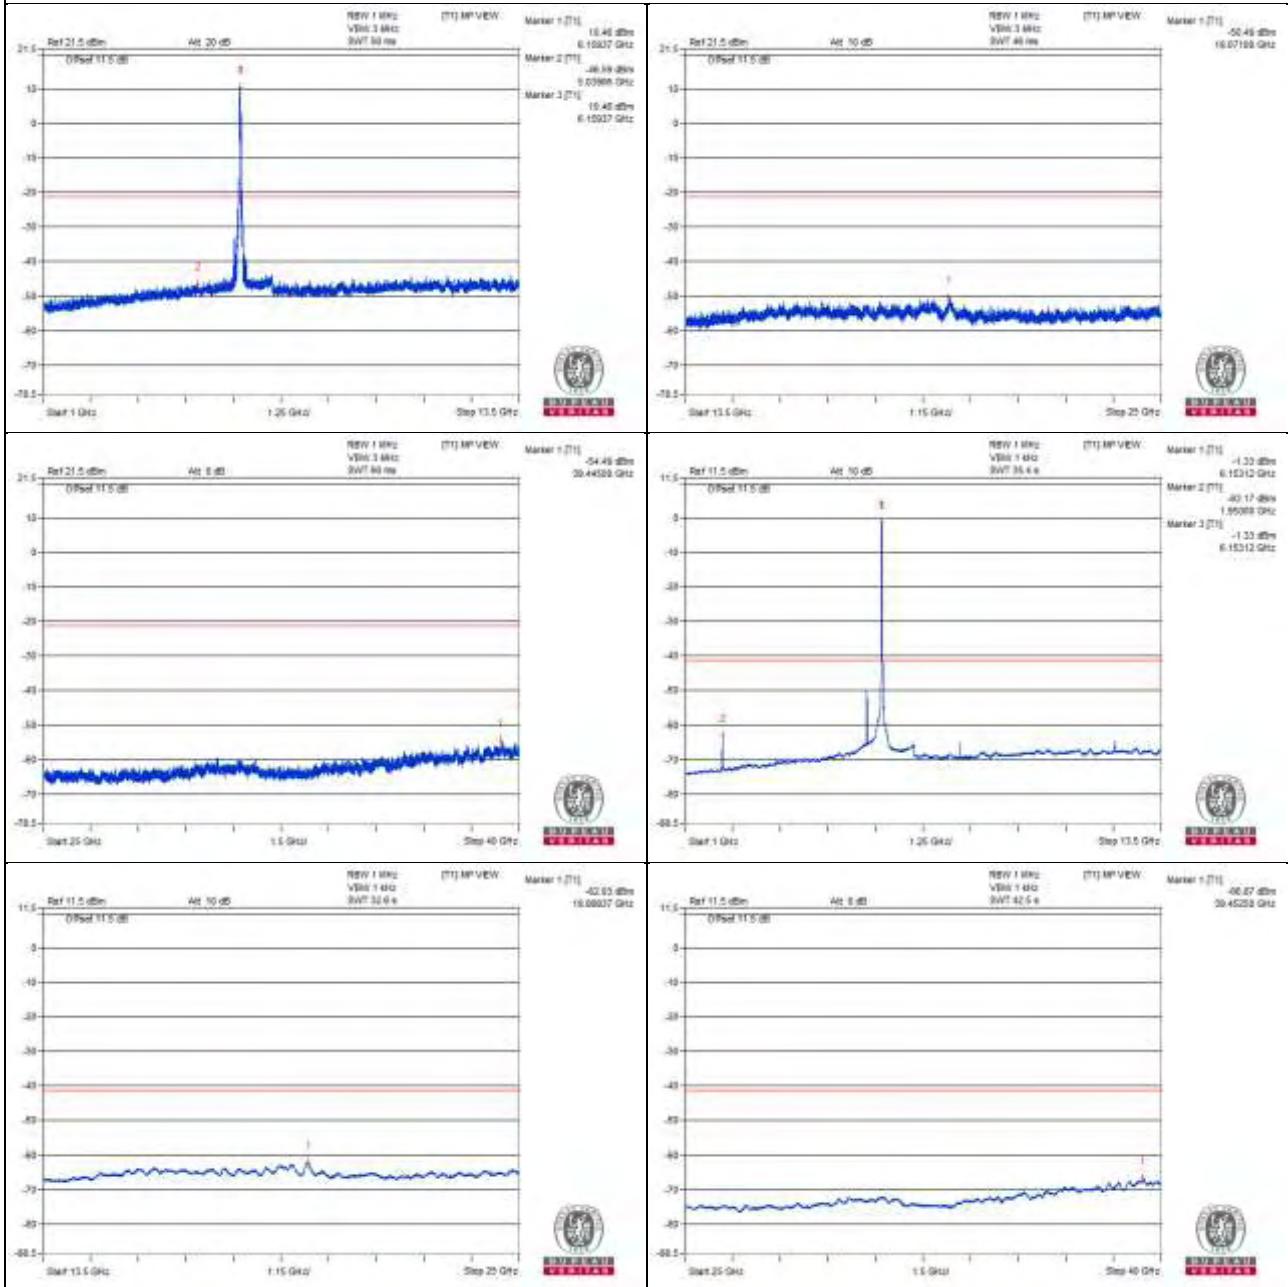

Channel 91

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	2198.43 PK	54.93	88.2	-33.27	-51.2	-51.84	8.17	-40.33
2	2195.31 AV	41.19	68.2	-27.01	-65.31	-65.19	8.17	-54.07
3	5484.37 PK	58.61	88.2	-29.59	-47.17	-48.6	8.17	-36.65
4	5484.37 AV	38.36	68.2	-29.84	-68.13	-68.03	8.17	-56.9
5	5759.37 PK	60.4	88.2	-27.8	-46.7	-45.47	8.17	-34.86
6	5759.37 AV	53.39	68.2	-14.81	-56.07	-51.28	8.17	-41.87
7	8540.62 PK	58.66	88.2	-29.54	-47.24	-48.39	8.17	-36.6
8	8540.62 AV	43.58	68.2	-24.62	-60.38	-69.22	8.17	-51.68
9	12809.37 PK	60.67	88.2	-27.53	-44.71	-47.18	8.17	-34.59
10	12806.25 AV	39.2	68.2	-29	-67.16	-67.33	8.17	-56.06
11	19216.93 PK	54.07	74	-19.93	-53.18	-51.69	8.17	-41.19
12	19216.93 AV	43.37	54	-10.63	-63.1	-63.04	8.17	-51.89

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

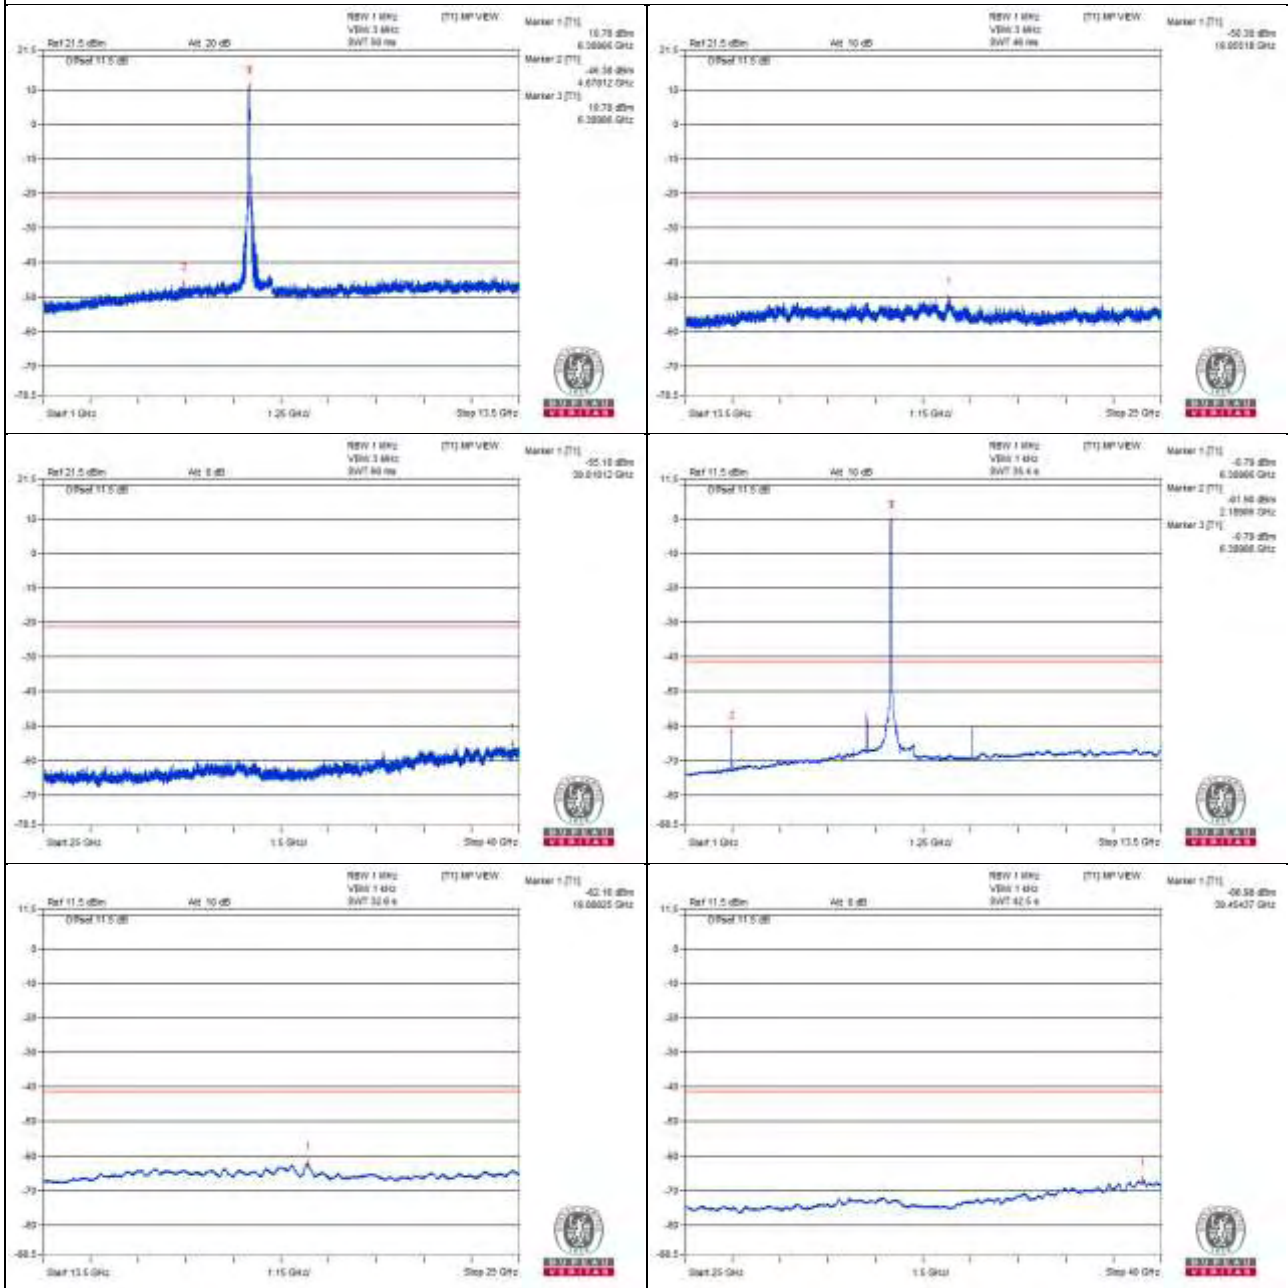

Chain 1

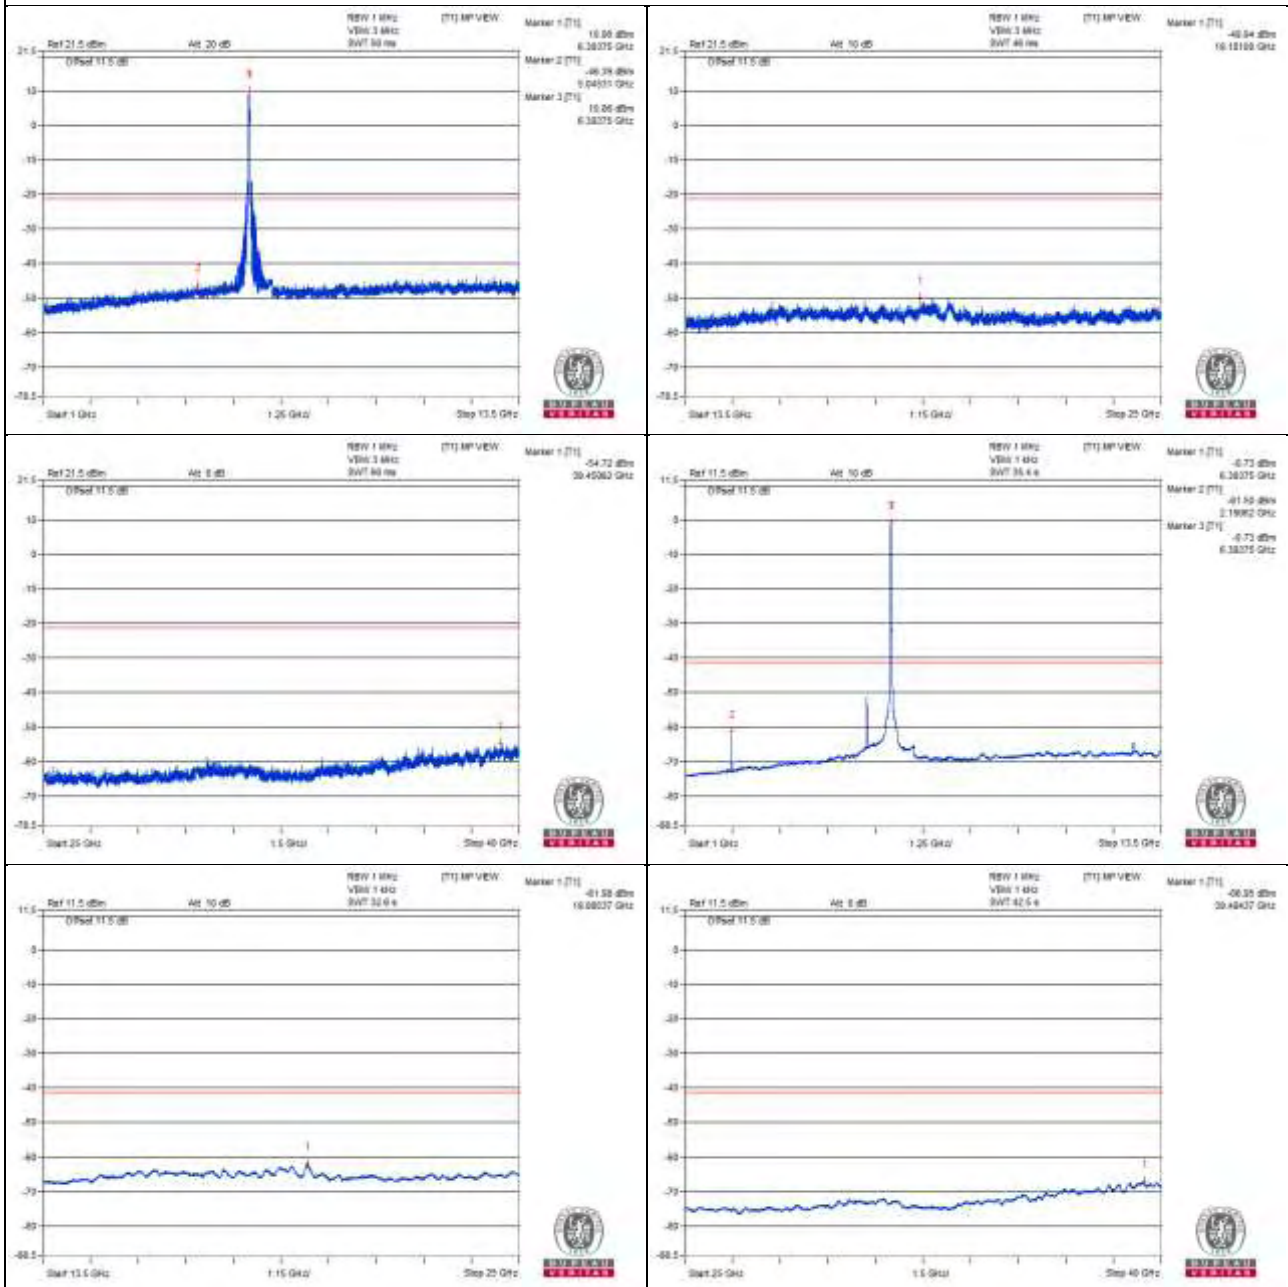

Channel 123

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	2360.93 PK	55.43	74	-18.57	-50.83	-51.2	8.17	-39.83
2	2364.06 AV	41.89	54	-12.11	-64.54	-64.56	8.17	-53.37
3	5484.37 PK	58.98	88.2	-29.22	-46.82	-48.21	8.17	-36.28
4	5479.68 AV	38.29	68.2	-29.91	-68.27	-68.04	8.17	-56.97
5	5759.37 PK	61.23	88.2	-26.97	-46.04	-44.51	8.17	-34.03
6	5759.37 AV	54.18	68.2	-14.02	-54.68	-50.71	8.17	-41.08
7	8753.12 PK	59.97	88.2	-28.23	-47	-46	8.17	-35.29
8	8753.12 AV	45.07	68.2	-23.13	-58.85	-68.06	8.17	-50.19
9	13126.56 PK	60.19	88.2	-28.01	-45.45	-47.23	8.17	-35.07
10	13131.25 AV	39	68.2	-29.2	-67.64	-67.25	8.17	-56.26
11	19695.62 PK	51.29	74	-22.71	-54.92	-55.4	8.17	-43.97
12	19692.75 AV	40.76	54	-13.24	-65.91	-65.47	8.17	-54.5

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

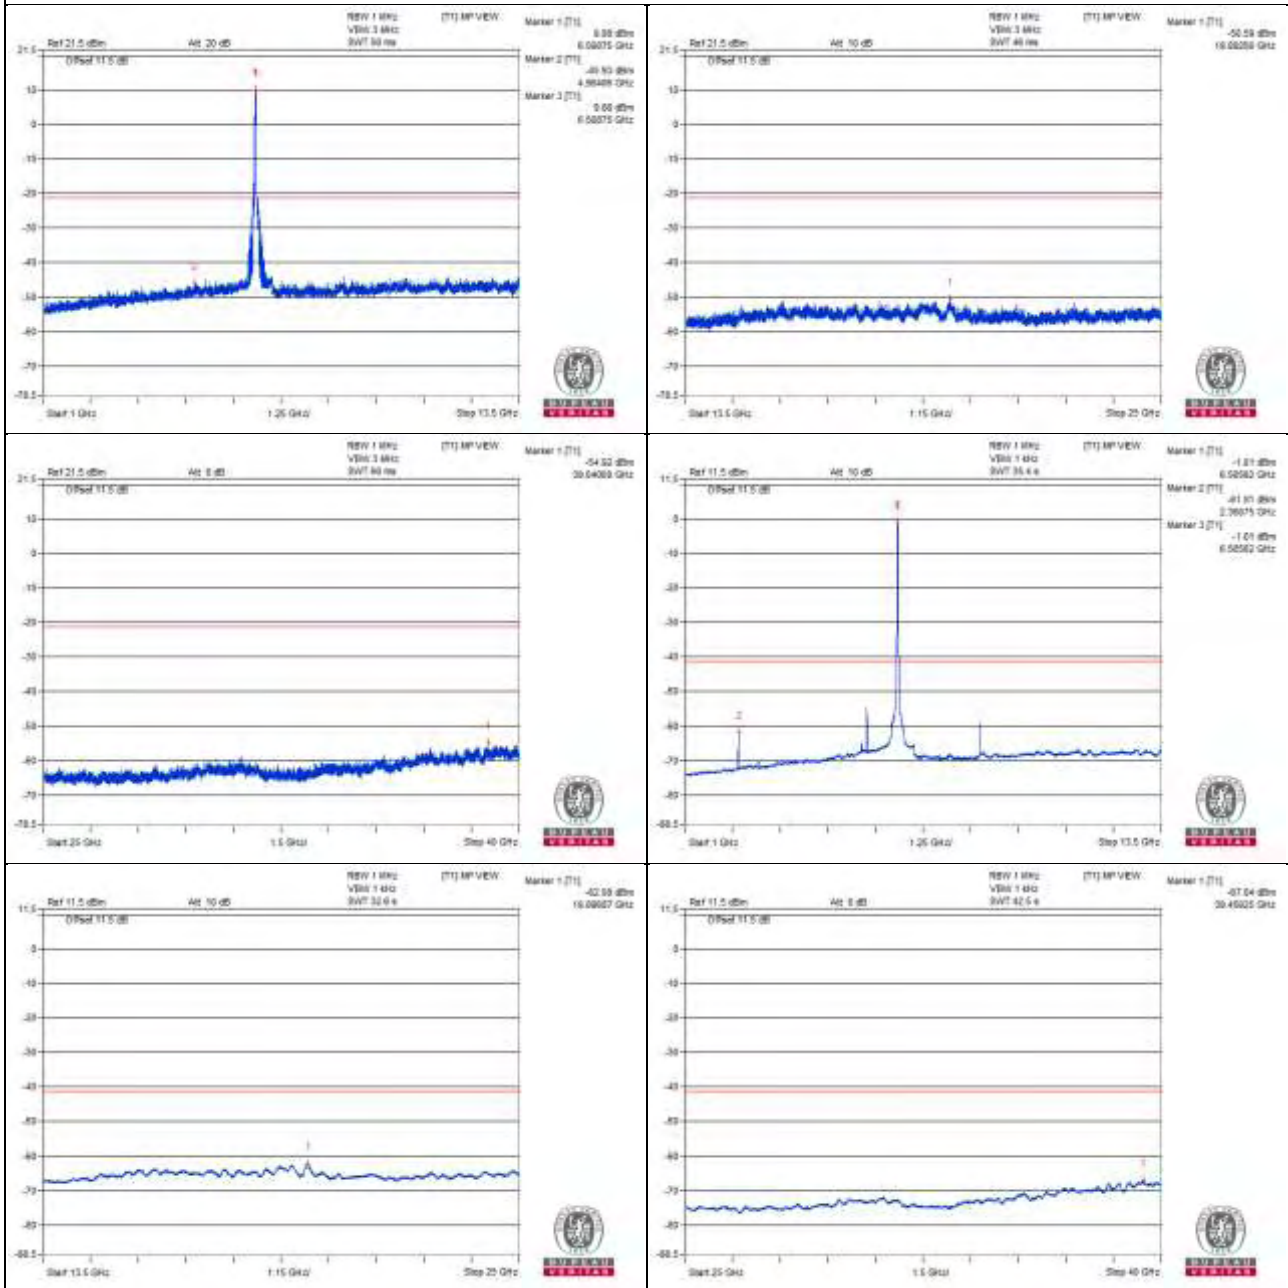

Chain 1

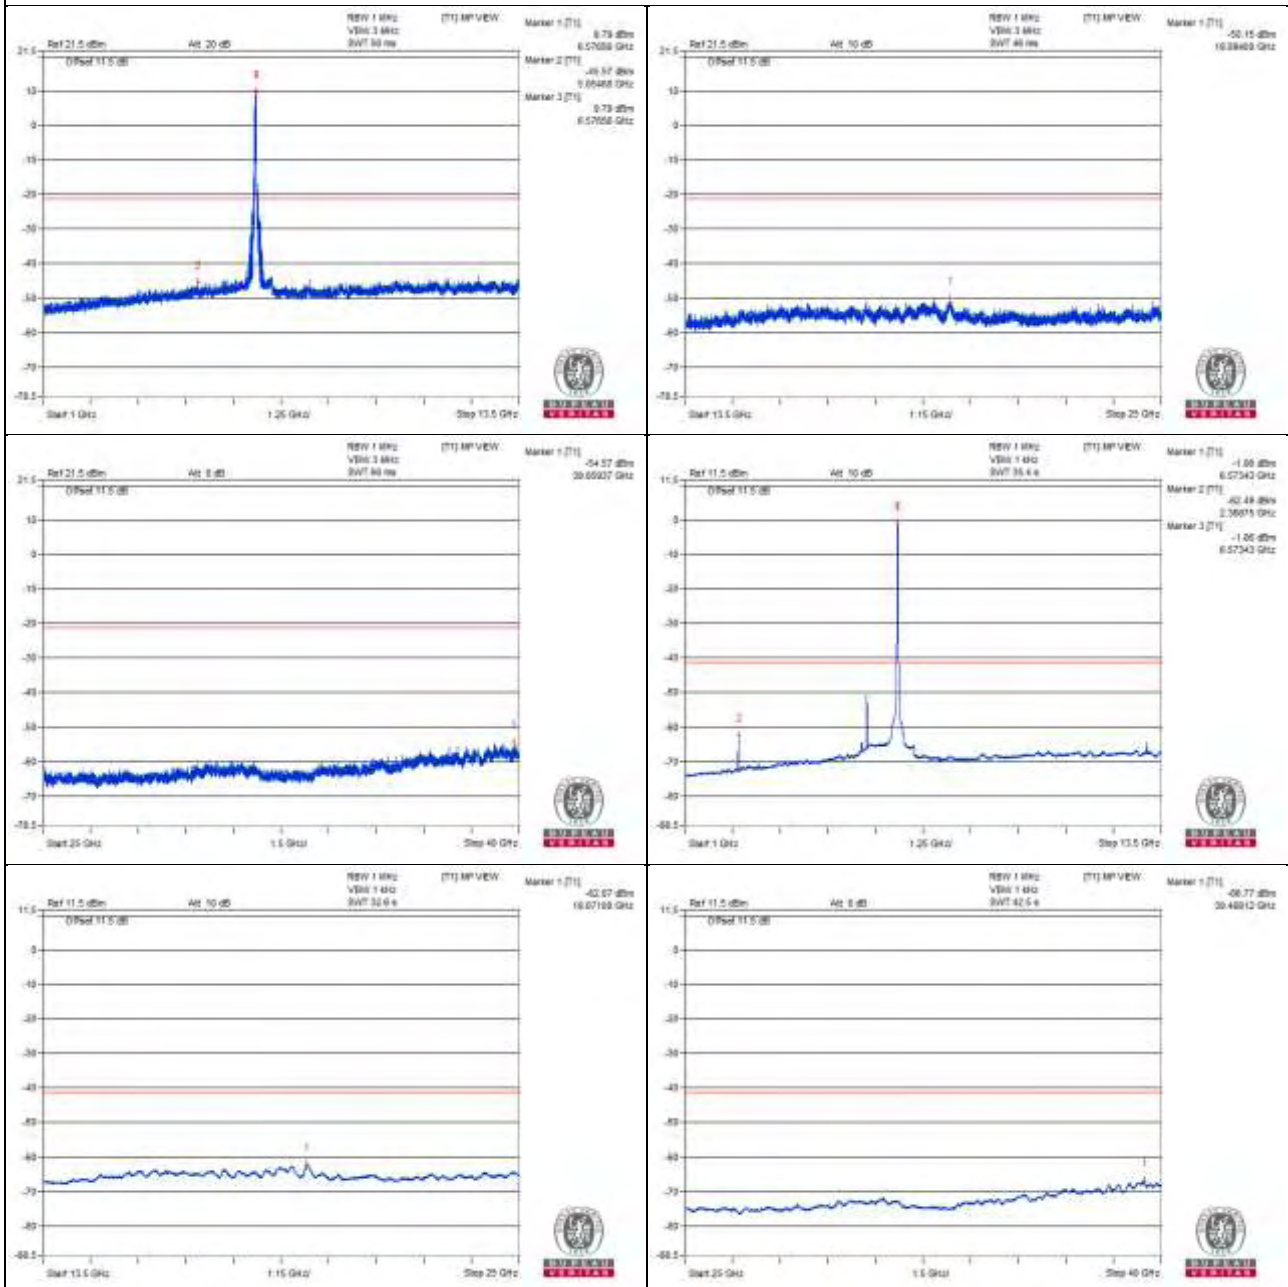

Channel 155

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	2520.31 PK	56.29	74	-17.71	-50.08	-50.22	8.17	-38.97
2	2525 AV	41.92	54	-12.08	-64.7	-64.35	8.17	-53.34
3	5487.5 PK	58.41	88.2	-29.79	-47.61	-48.5	8.17	-36.85
4	5485.93 AV	38.17	68.2	-30.03	-68.21	-68.33	8.17	-57.09
5	5759.37 PK	61.25	88.2	-26.95	-45.58	-44.83	8.17	-34.01
6	5759.37 AV	54.95	68.2	-13.25	-52.39	-50.74	8.17	-40.31
7	8965.62 PK	58.75	88.2	-29.45	-47	-48.51	8.17	-36.51
8	8967.18 AV	41.53	68.2	-26.67	-62.94	-68.64	8.17	-53.73
9	13453.12 PK	59.94	88.2	-28.26	-46.55	-46.46	8.17	-35.32
10	13454.68 AV	38.86	68.2	-29.34	-67.55	-67.62	8.17	-56.4
11	20175.75 PK	51.19	74	-22.81	-55.92	-54.67	8.17	-44.07
12	20178.62 AV	41.28	54	-12.72	-65.12	-65.2	8.17	-53.98

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

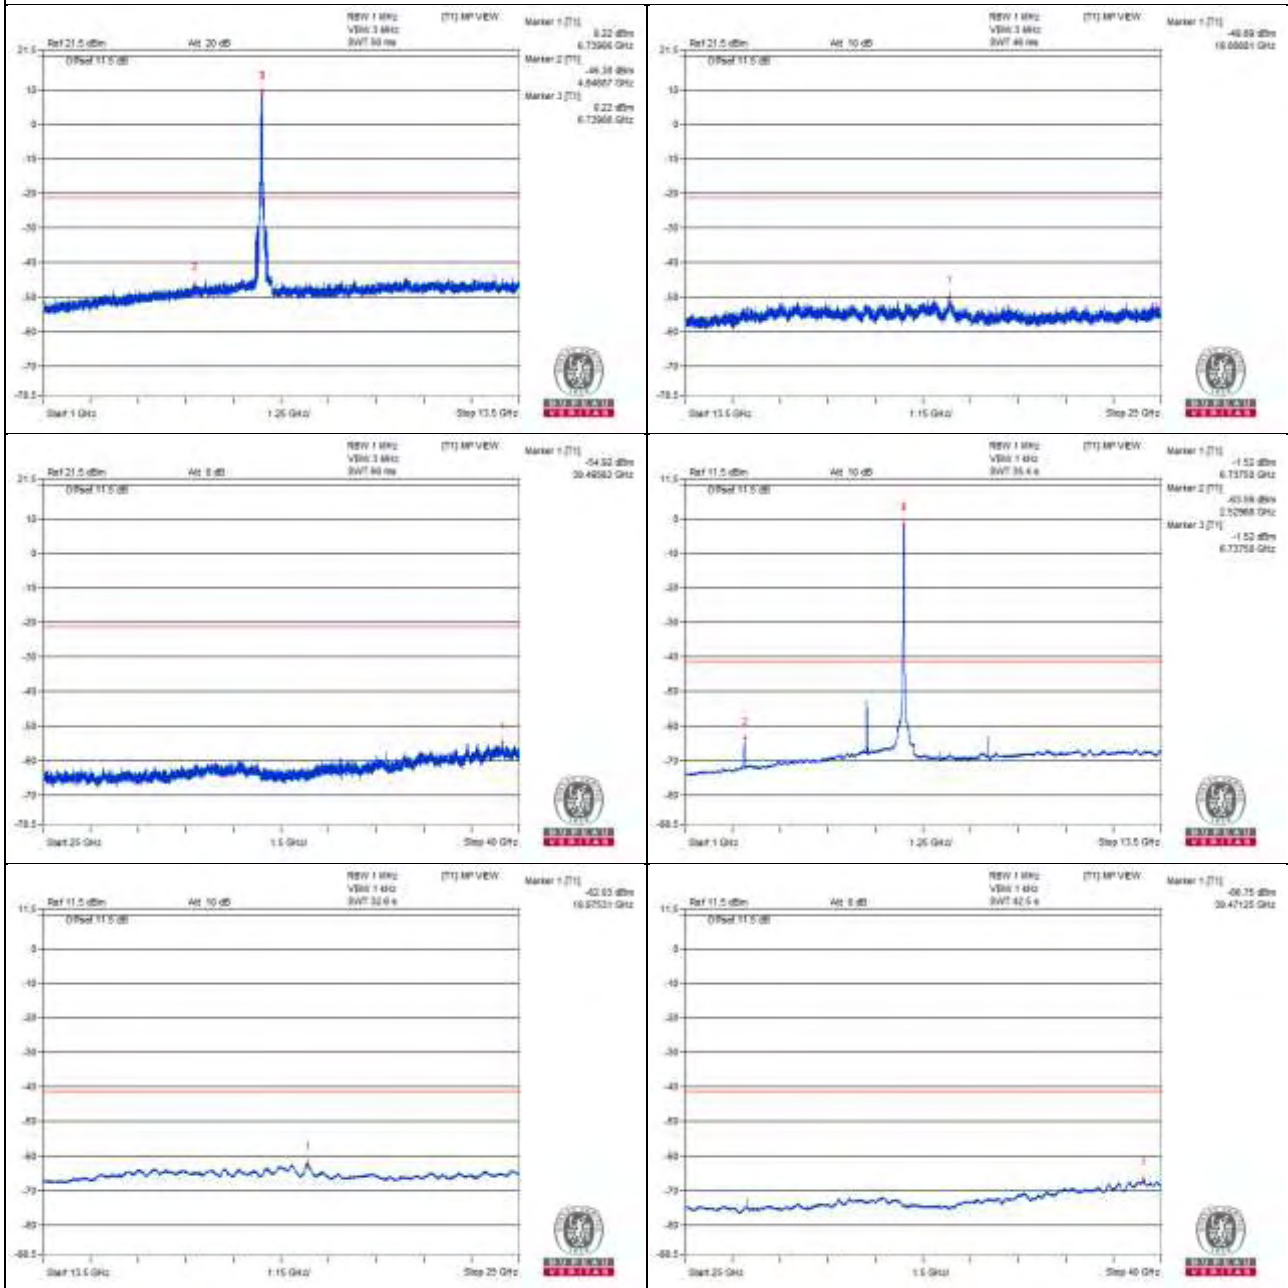

Chain 1

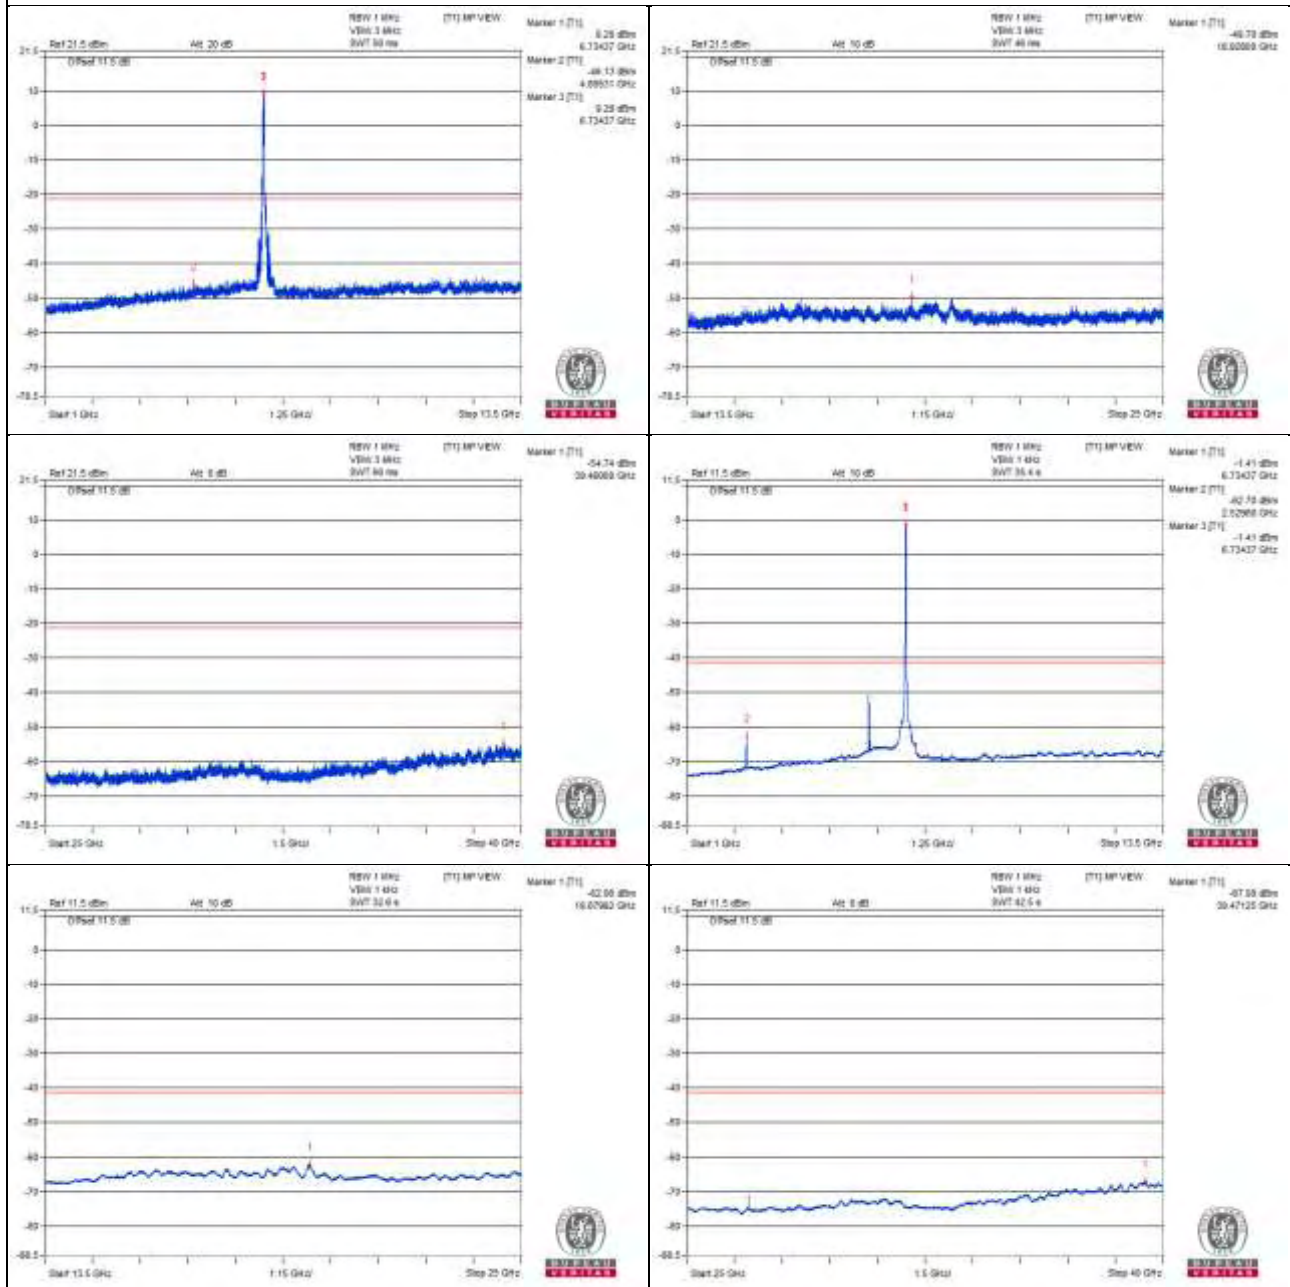

Channel 179

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	2635.93 PK	56.44	74	-17.56	-49.98	-50.02	8.17	-38.82
2	2643.75 AV	36.94	54	-17.06	-68.33	-71.1	8.17	-58.32
3	5481.25 PK	58.81	88.2	-29.39	-48.75	-46.74	8.17	-36.45
4	5485.93 AV	38.21	68.2	-29.99	-68	-68.47	8.17	-57.05
5	5759.37 PK	62.24	88.2	-25.96	-45.34	-43.3	8.17	-33.02
6	5759.37 AV	54.89	68.2	-13.31	-52.74	-50.62	8.17	-40.37
7	9125 PK	59.36	74	-14.64	-47.16	-47.01	8.17	-35.9
8	9126.56 AV	39	54	-15	-66.78	-68.21	8.17	-56.26
9	13688.31 PK	49.3	88.2	-38.9	-57.52	-56.79	8.17	-45.96
10	13686.87 AV	39.51	68.2	-28.69	-67.46	-66.45	8.17	-55.75
11	20530.81 PK	51.7	74	-22.3	-55.31	-54.24	8.17	-43.56
12	20539.43 AV	40.41	54	-13.59	-66.16	-65.91	8.17	-54.85

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

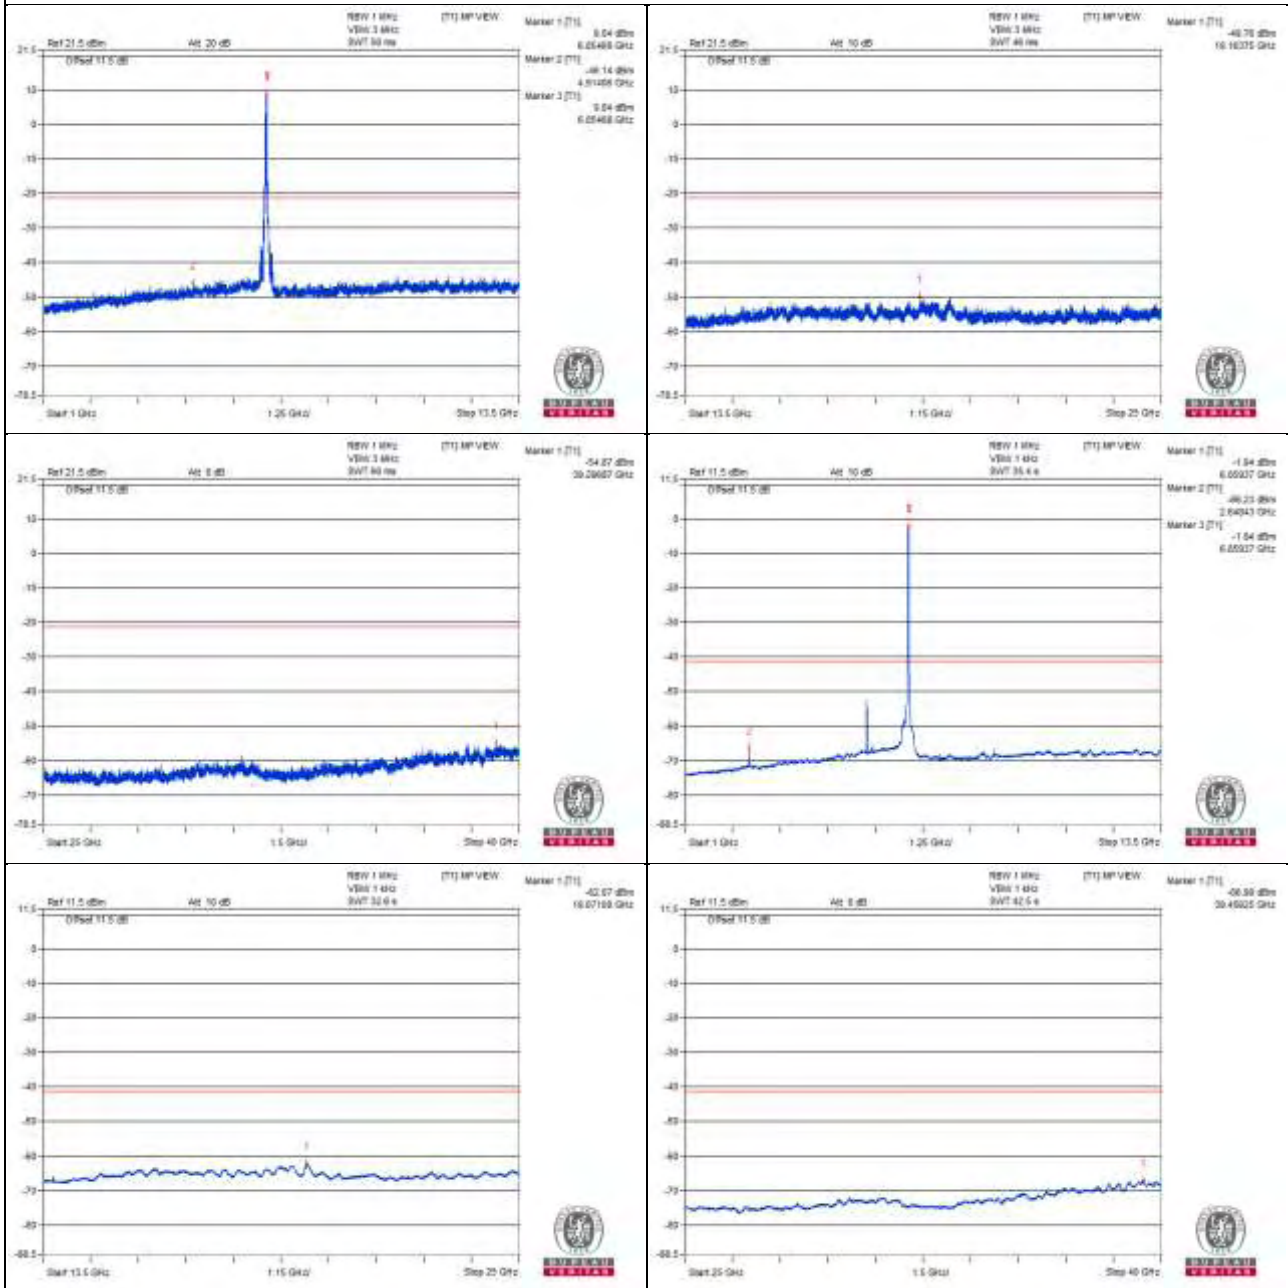

Chain 1

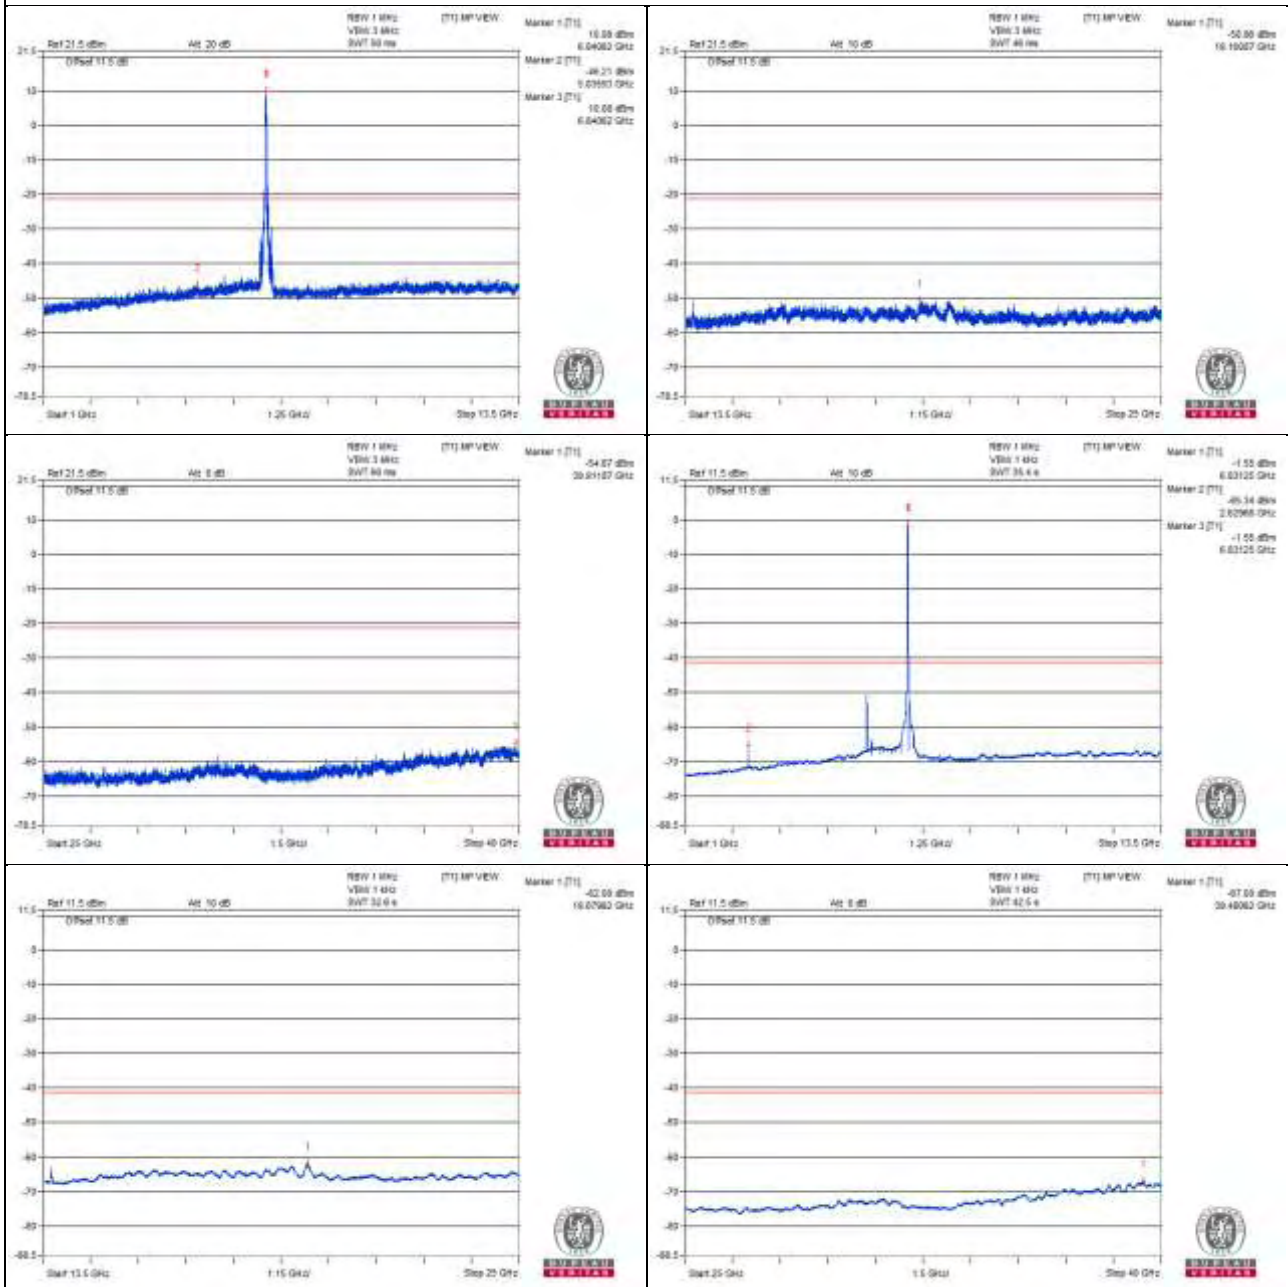

Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	7205.6 PK	60.14	88.2	-28.06	-46.53	-46.09	8.17	-35.12
2	7203.6 AV	47.05	68.2	-21.15	-59.43	-59.36	8.17	-48.21


Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8


d = measurement distance in 3 meters.

* The unwanted emission was verified and the test result was passed by radiated measurement.

Chain 0

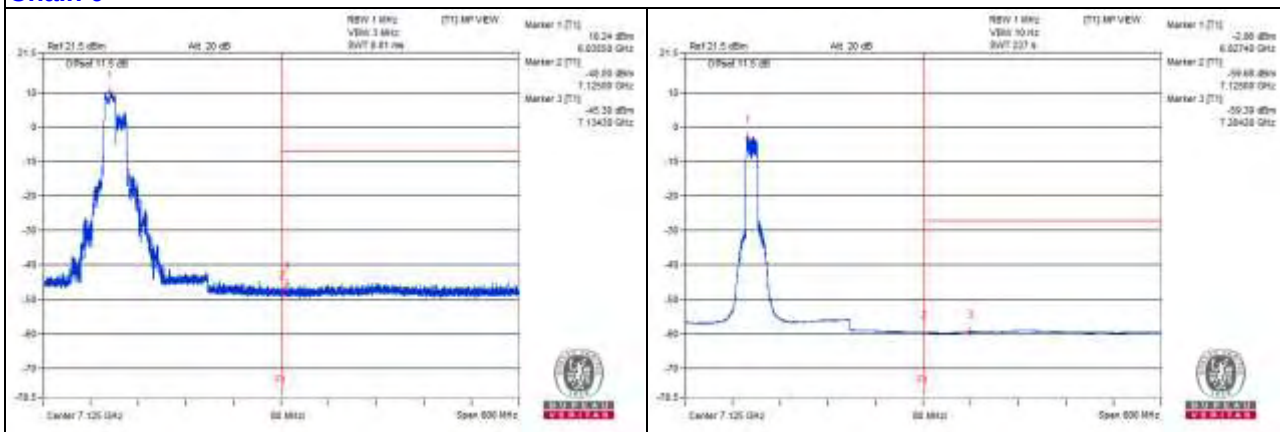

Chain 1

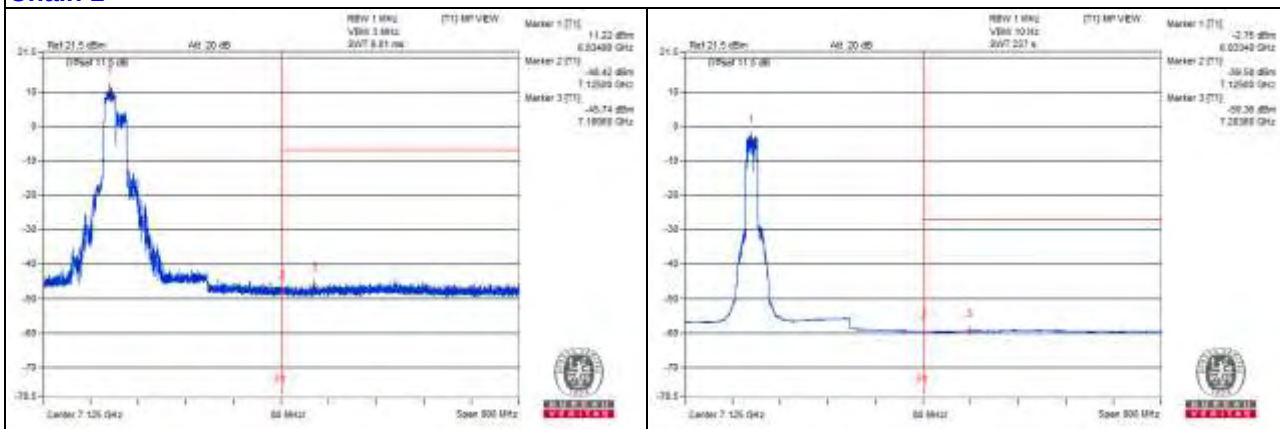

RU484

Channel 3

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	1760.93 PK	54.57	74	-19.43	-51.21	-52.65	8.17	-40.69
2	1759.37 AV	41.31	54	-12.69	-64.79	-65.51	8.17	-53.95
3	5484.37 PK	59.34	88.2	-28.86	-46.48	-47.83	8.17	-35.92
4	5481.25 AV	39.4	68.2	-28.8	-66.59	-67.55	8.17	-55.86
5	5759.37 PK	62.11	88.2	-26.09	-44.99	-43.76	8.17	-33.15
6	5759.37 AV	54.64	68.2	-13.56	-52.91	-50.92	8.17	-40.62
7	7950 PK	59.3	88.2	-28.9	-46.49	-47.91	8.17	-35.96
8	7953.12 AV	44.86	68.2	-23.34	-60.19	-63.64	8.17	-50.4
9	11926.56 PK	60.19	74	-13.81	-45.75	-46.81	8.17	-35.07
10	11929.68 AV	40.15	54	-13.85	-66.95	-65.71	8.17	-55.11
11	17893 PK	53.39	74	-20.61	-52.71	-53.42	8.17	-41.87
12	17897.31 AV	42.9	54	-11.1	-63.52	-63.57	8.17	-52.36

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

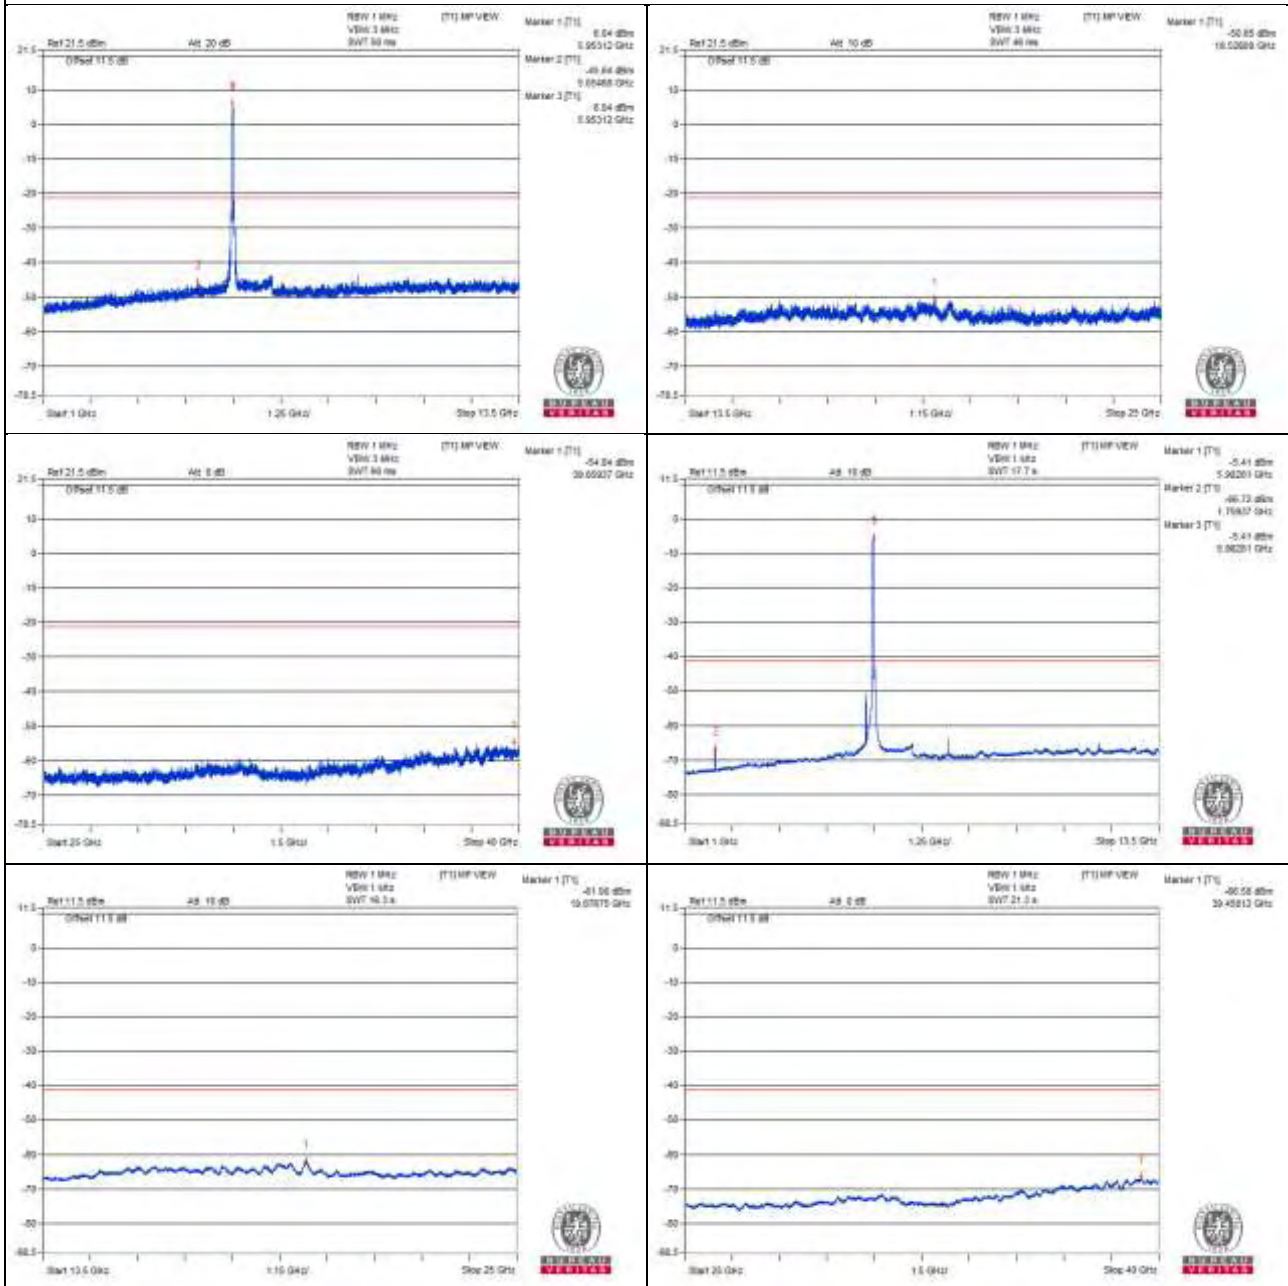

Chain 1

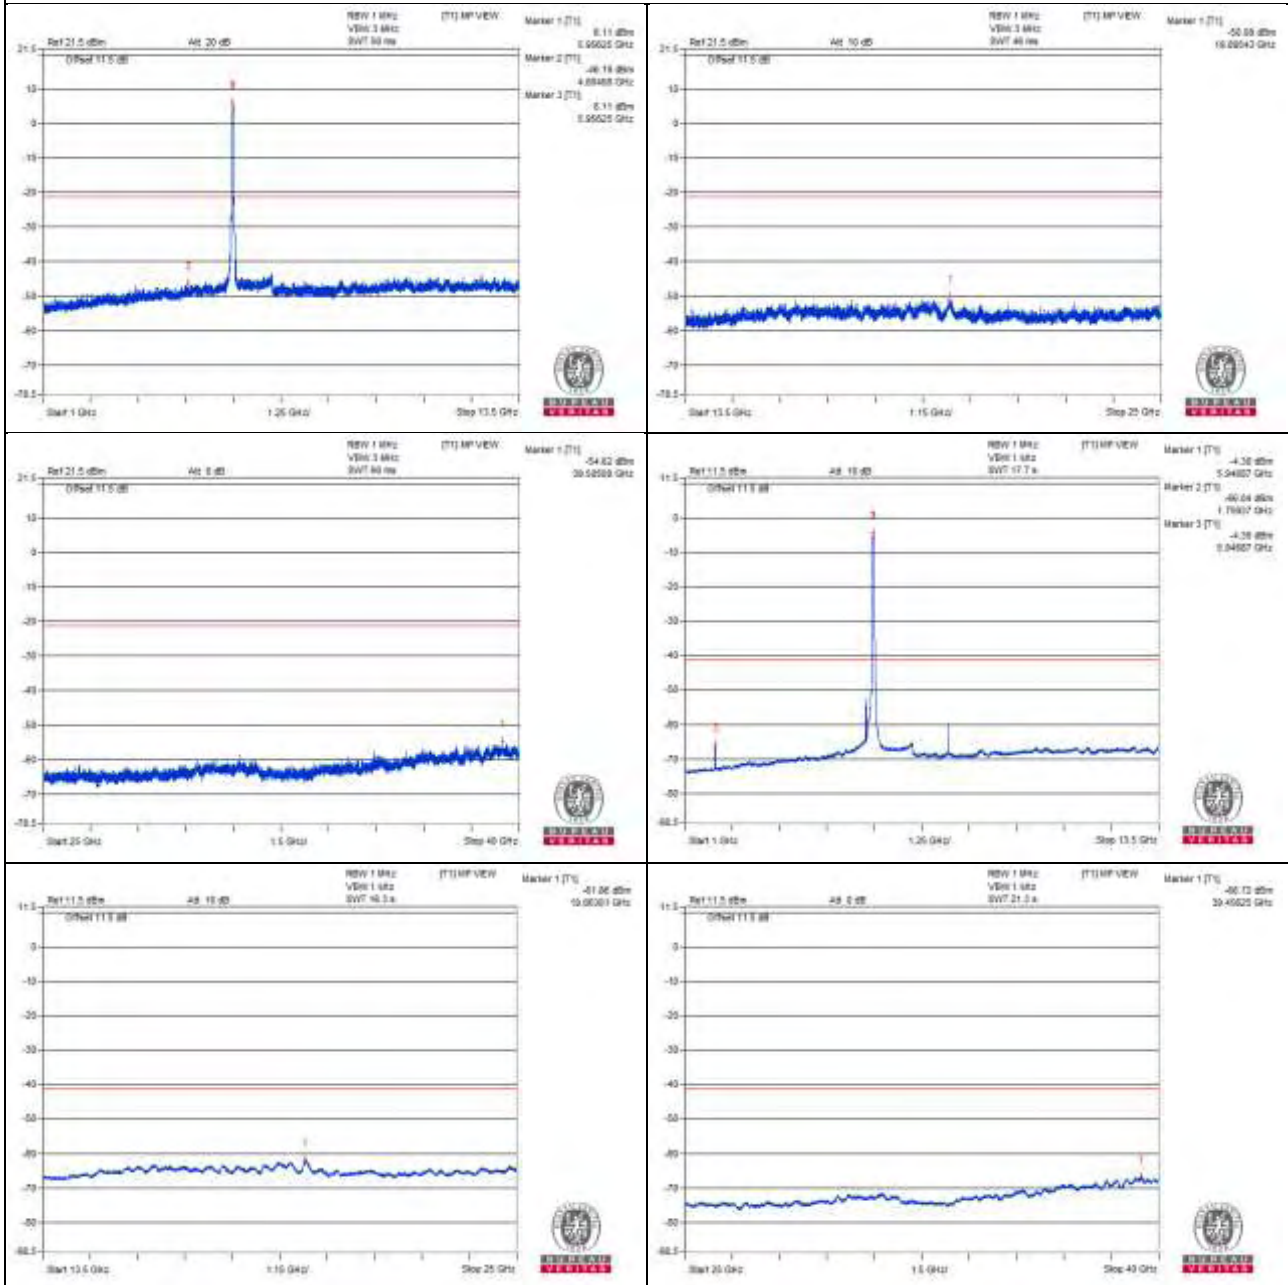

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5923.1 PK	84.07	88.2	-4.13	-20.7	-25.03	8.15	-11.19
2	5924.82 AV	65.87	68.2	-2.33	-42.78	-39.08	8.15	-29.39

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

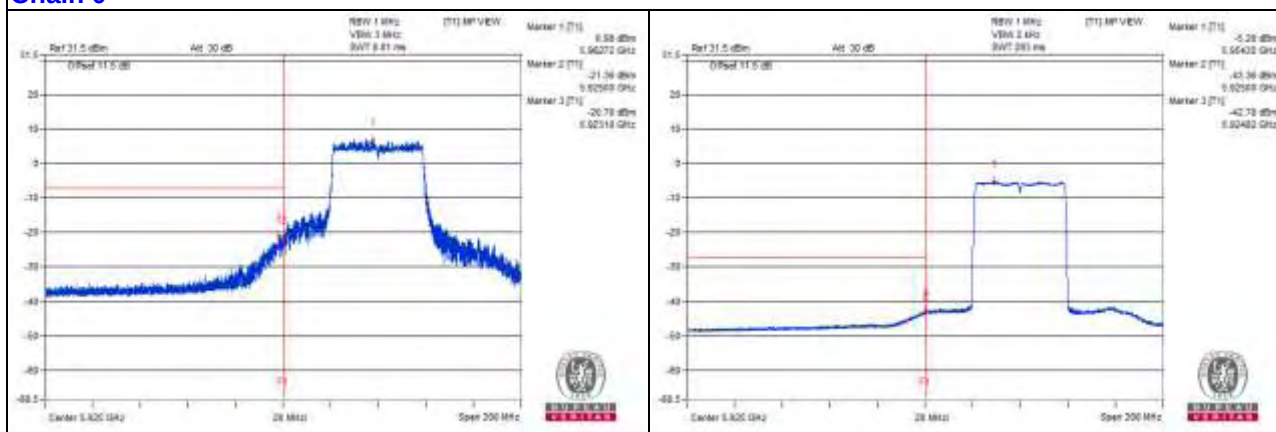

Chain 1

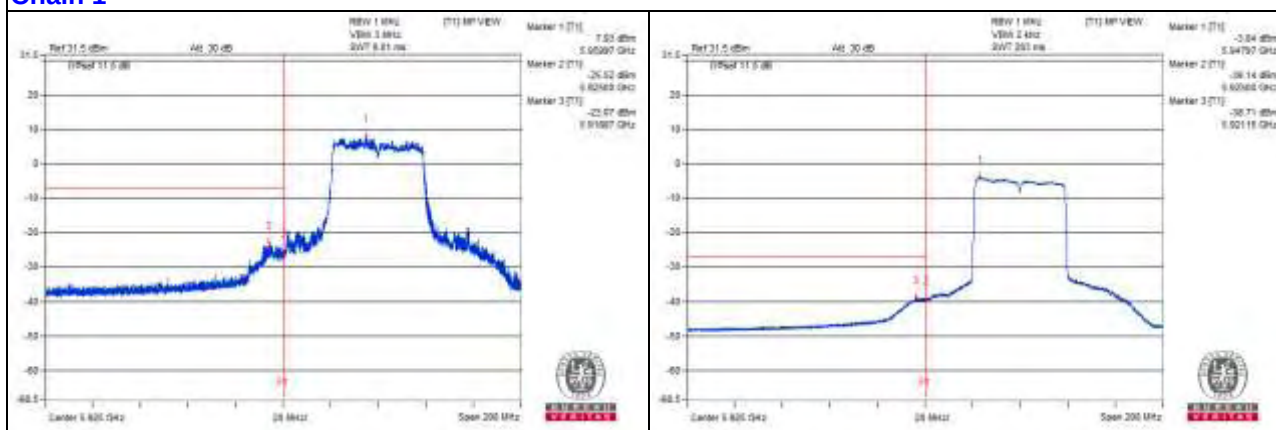

Channel 43

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	1956.25 PK	55.04	74	-18.96	-51.39	-51.42	8.17	-40.22
2	1959.37 AV	40.96	54	-13.04	-65.52	-65.45	8.17	-54.3
3	5481.25 PK	58.79	88.2	-29.41	-47.74	-47.56	8.17	-36.47
4	5487.5 AV	39.4	68.2	-28.8	-66.55	-67.59	8.17	-55.86
5	5759.37 PK	62.39	88.2	-25.81	-43.38	-44.84	8.17	-32.87
6	5759.37 AV	56.29	68.2	-11.91	-49.81	-50.53	8.17	-38.97
7	8220.31 PK	58.54	74	-15.46	-47.11	-48.86	8.17	-36.72
8	8220.31 AV	43.4	54	-10.6	-61.58	-65.25	8.17	-51.86
9	12329.68 PK	60.04	74	-13.96	-46.75	-46.08	8.17	-35.22
10	12329.68 AV	39.99	54	-14.01	-66.67	-66.24	8.17	-55.27
11	18495.31 PK	53.07	74	-20.93	-52.61	-54.3	8.17	-42.19
12	18495.31 AV	41.86	54	-12.14	-64.55	-64.61	8.17	-53.4

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

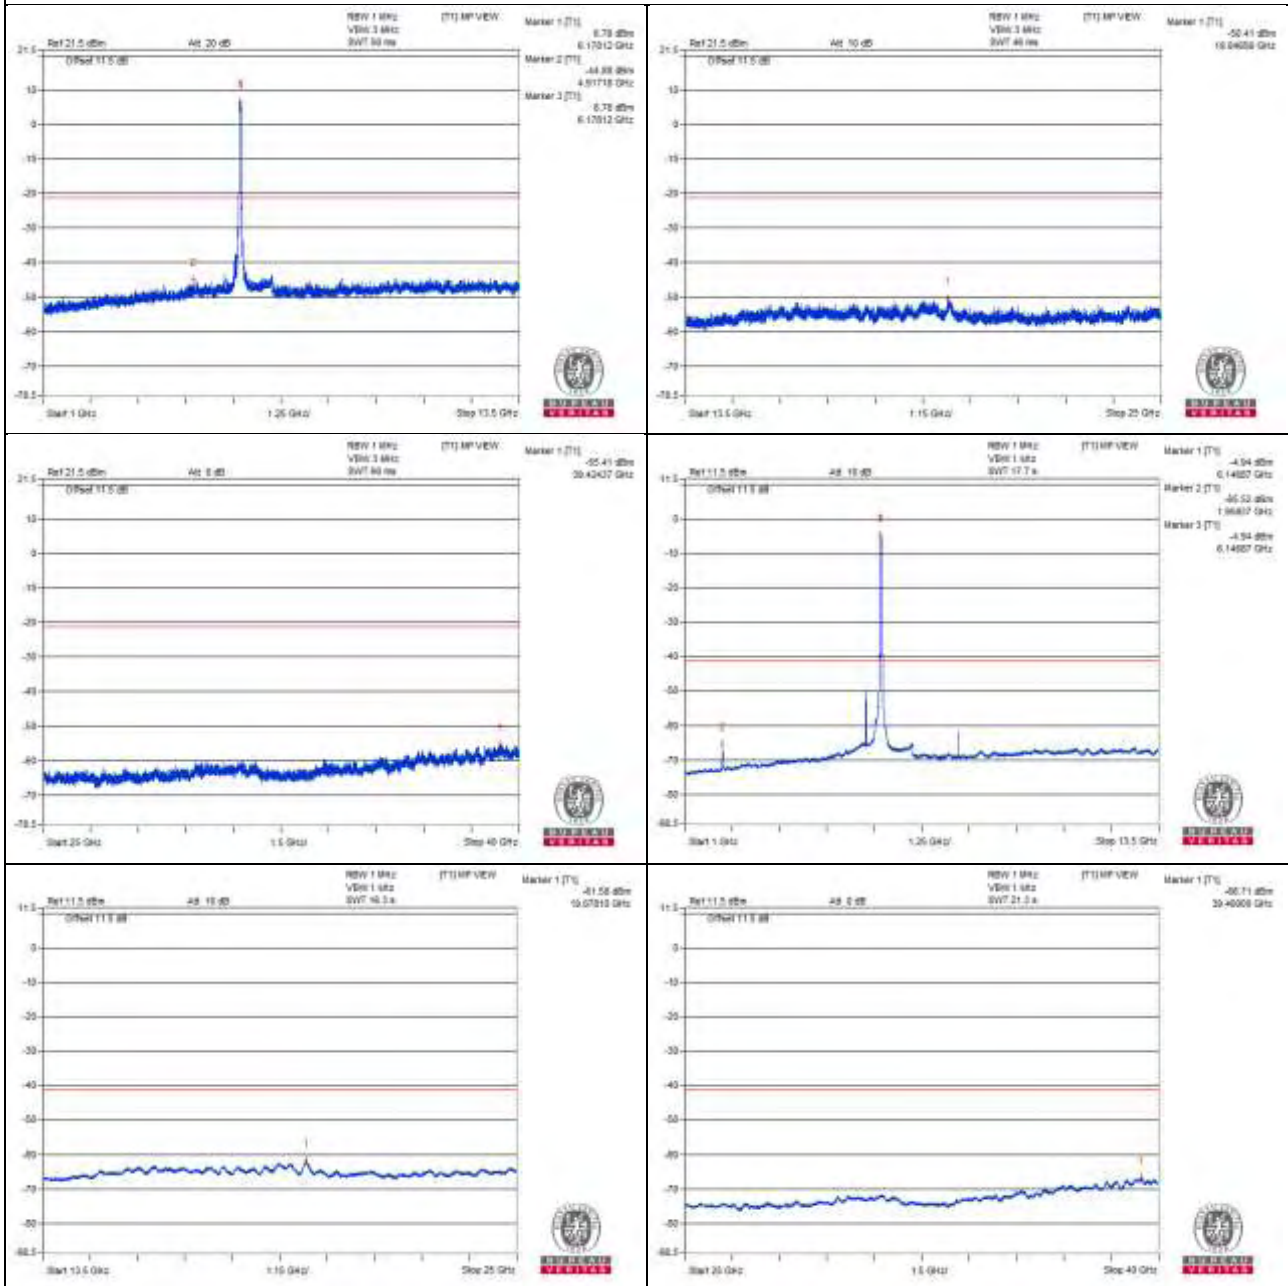

Chain 1

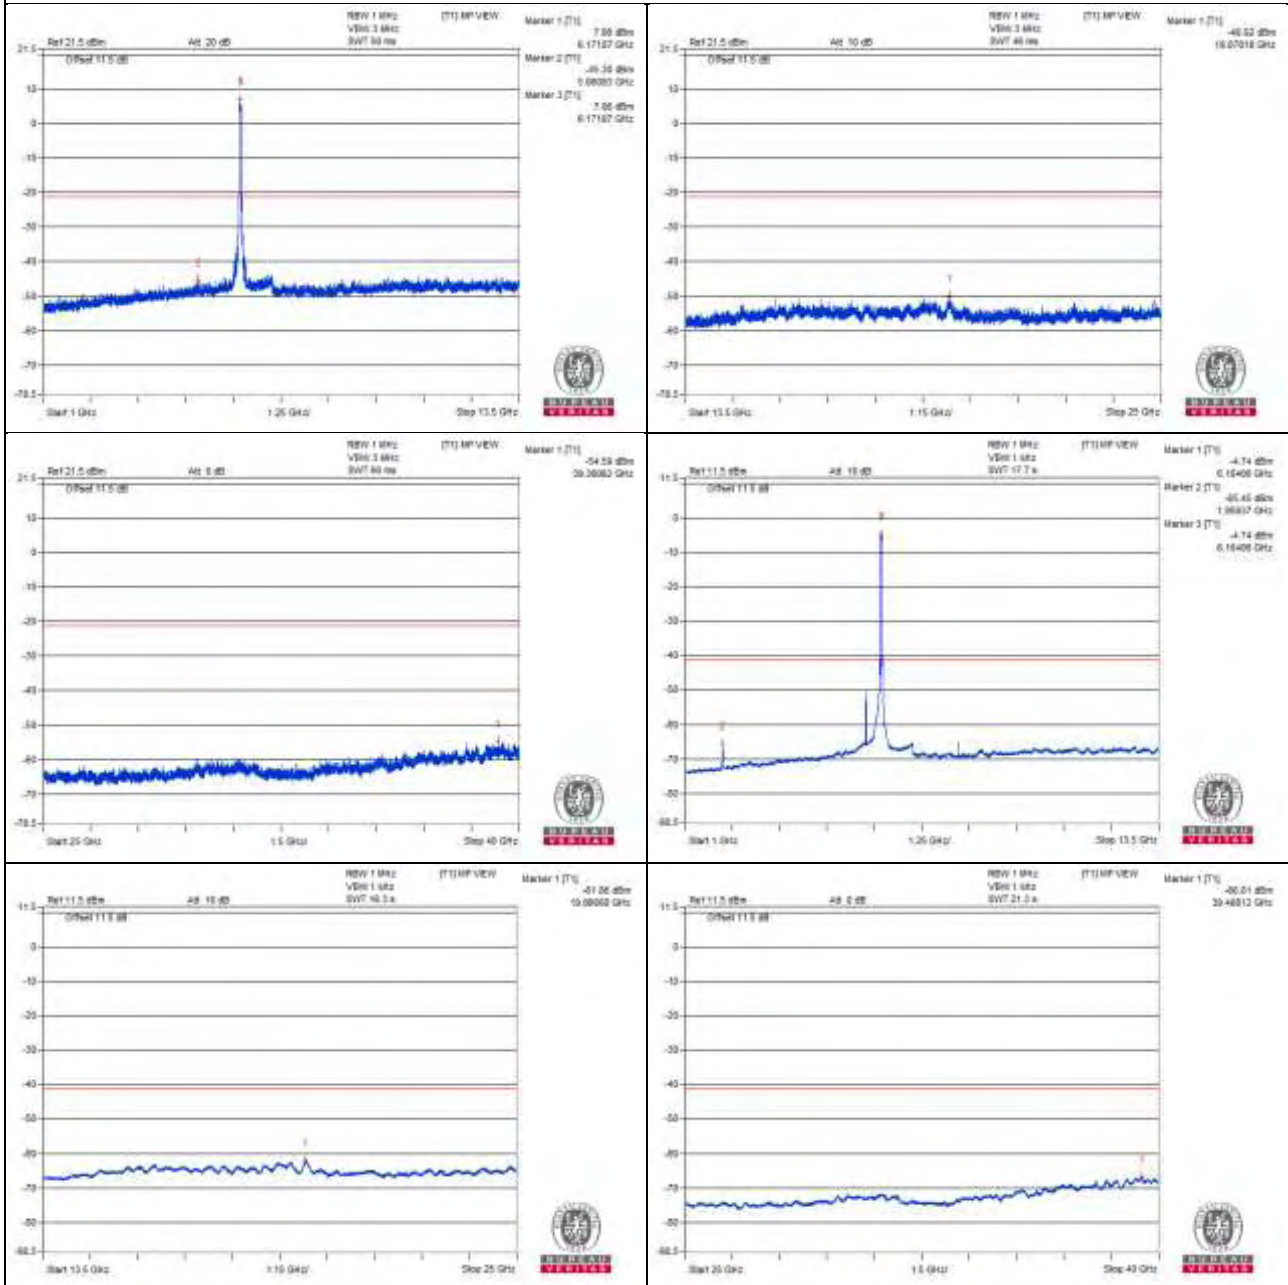

Channel 91

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	2201.56 PK	55.32	74	-18.68	-51.19	-51.06	8.17	-39.94
2	5484.37 PK	59	88.2	-29.2	-48.79	-46.42	8.17	-36.26
3	5481.25 AV	38.43	68.2	-29.77	-68.14	-67.88	8.17	-56.83
4	5759.37 PK	60	88.2	-28.2	-47.75	-45.43	8.17	-35.26
5	5759.37 AV	53.26	68.2	-14.94	-56.7	-51.26	8.17	-42
6	8535.93 PK	58.77	88.2	-29.43	-46.52	-49.23	8.17	-36.49
7	8540.62 AV	43.41	68.2	-24.79	-60.89	-67.43	8.17	-51.85
8	12812.5 PK	60.36	88.2	-27.84	-45.74	-46.46	8.17	-34.9
9	12812.5 AV	39.72	68.2	-28.48	-67.4	-66.14	8.17	-55.54
10	19212.62 PK	54.19	74	-19.81	-52.09	-52.42	8.17	-41.07
11	19212.62 AV	43.55	54	-10.45	-62.96	-62.83	8.17	-51.71
12	2201.56 PK	55.32	74	-18.68	-51.19	-51.06	8.17	-39.94

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

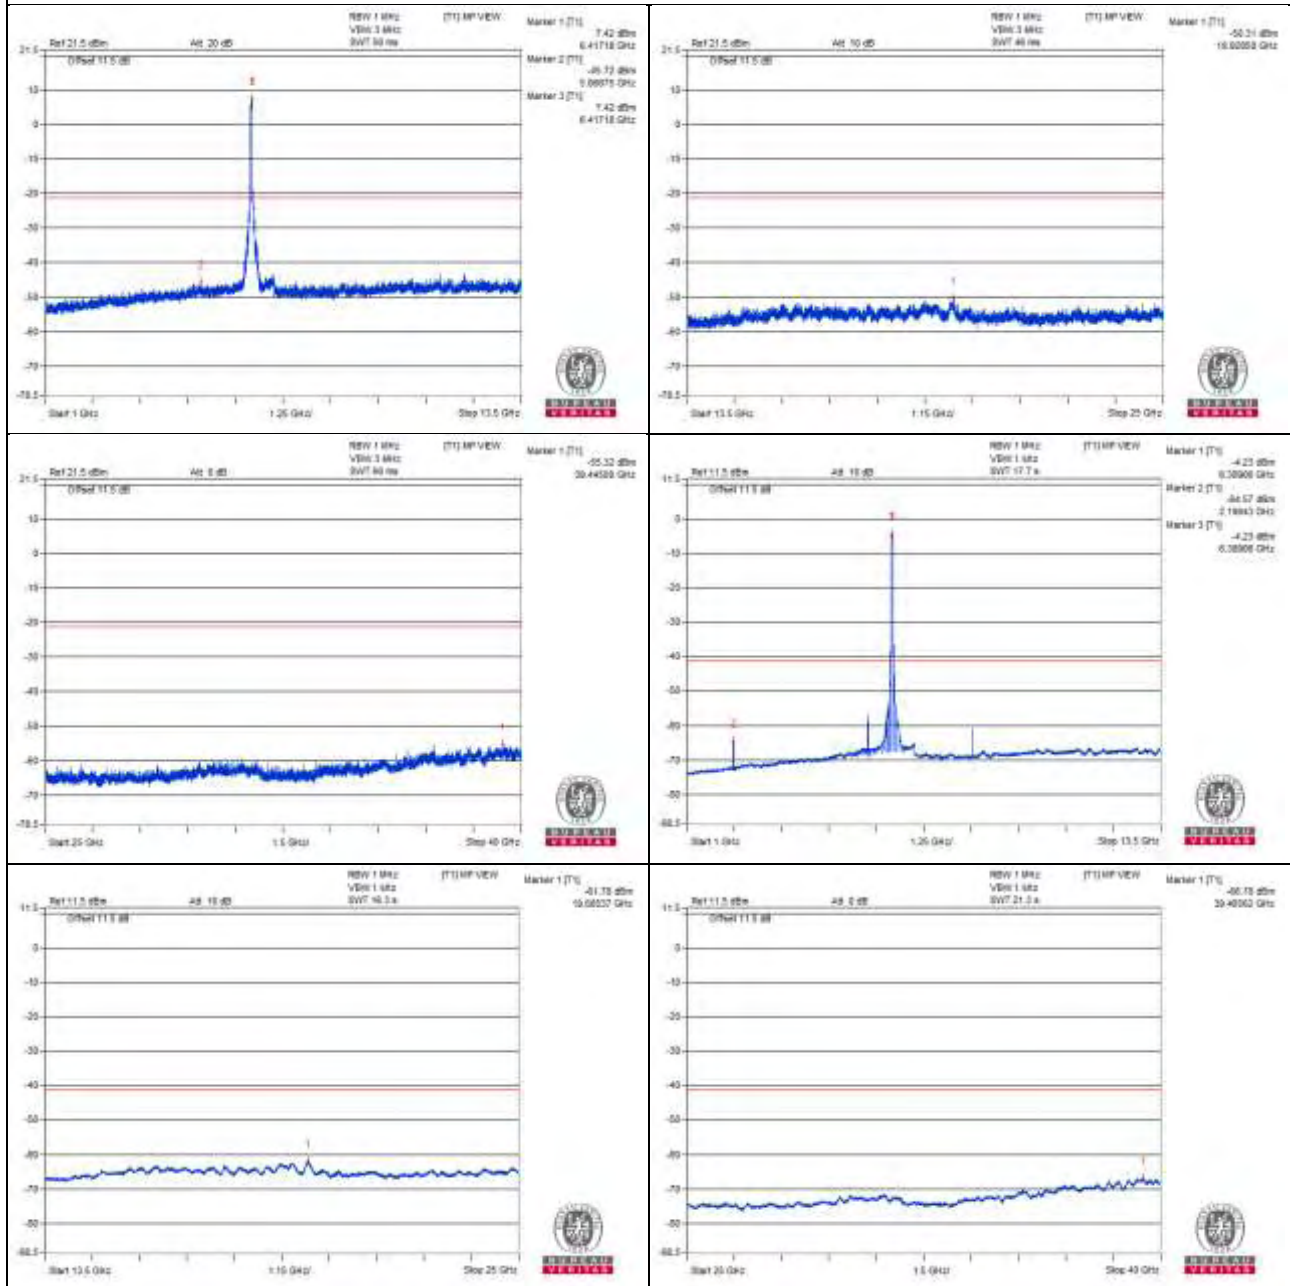

Chain 1

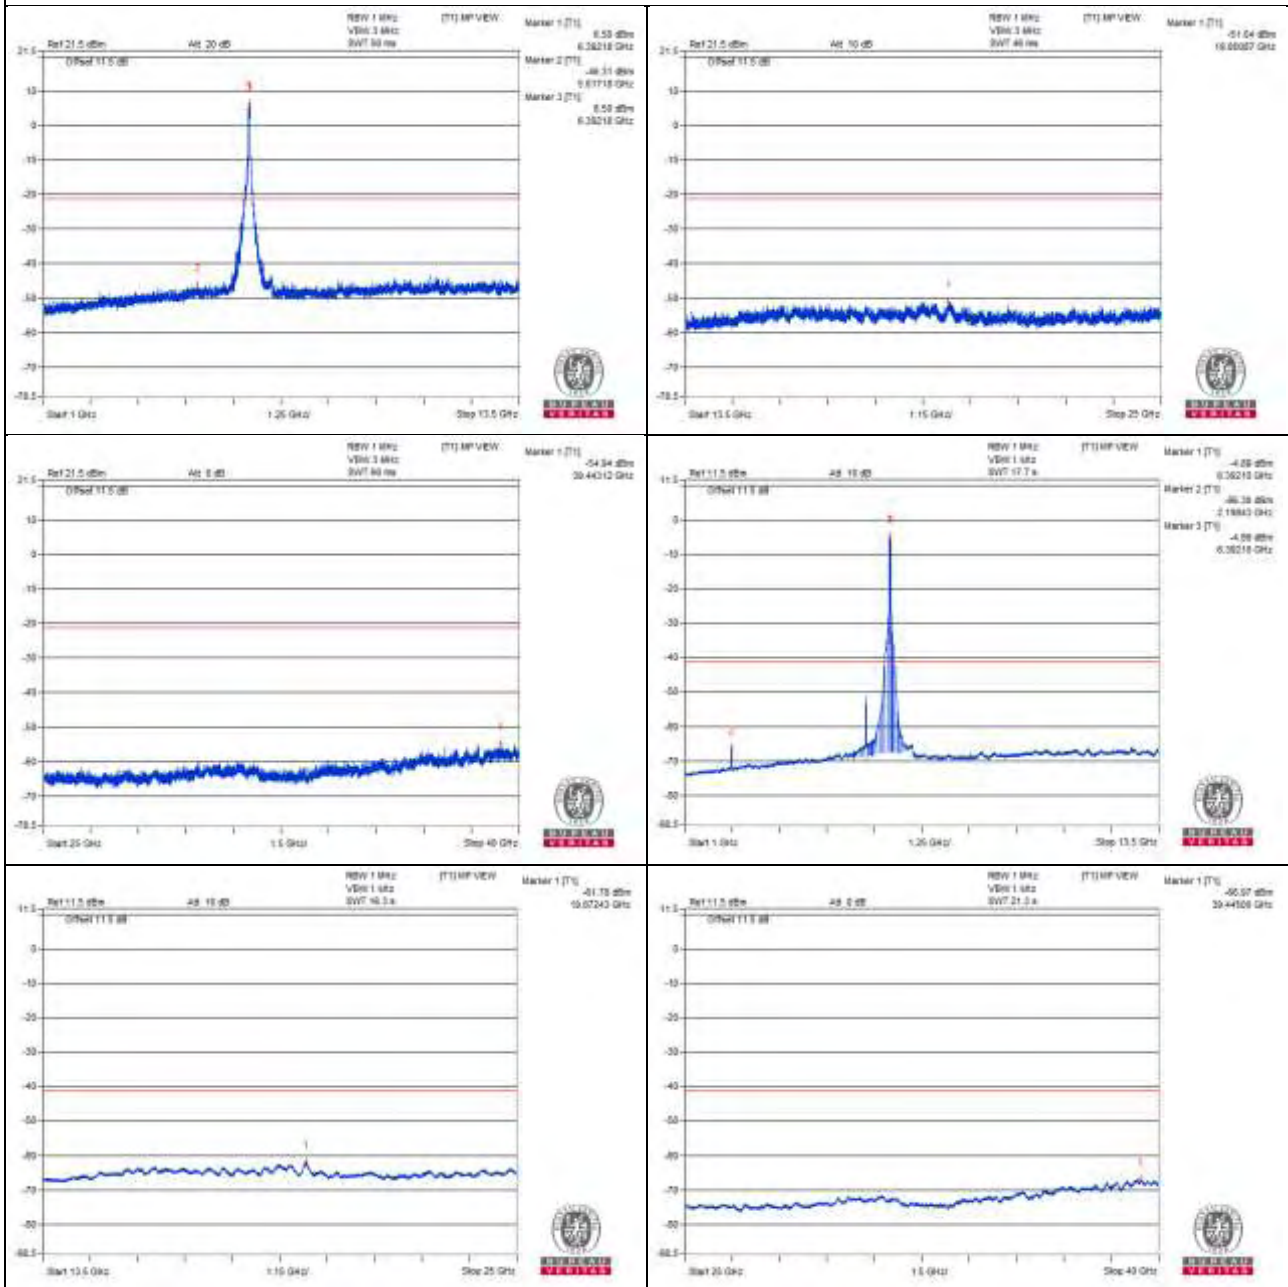

Channel 123

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	2357.81 PK	54.84	74	-19.16	-52.55	-50.82	8.17	-40.42
2	2359.37 AV	41.62	54	-12.38	-64.38	-65.3	8.17	-53.64
3	5482.81 PK	58.59	88.2	-29.61	-46.91	-49.04	8.17	-36.67
4	5485.93 AV	38.28	68.2	-29.92	-68.09	-68.24	8.17	-56.98
5	5759.37 PK	61.24	88.2	-26.96	-46.38	-44.28	8.17	-34.02
6	5759.37 AV	53.86	68.2	-14.34	-55.54	-50.83	8.17	-41.4
7	8753.12 PK	59.53	88.2	-28.67	-45.79	-48.42	8.17	-35.73
8	8753.12 AV	44.37	68.2	-23.83	-59.64	-68.06	8.17	-50.89
9	13125 PK	59.98	88.2	-28.22	-47.37	-45.71	8.17	-35.28
10	13131.25 AV	39.65	68.2	-28.55	-67.31	-66.33	8.17	-55.61
11	19695.62 PK	52.42	74	-21.58	-55.76	-52.78	8.17	-42.84
12	19695.62 AV	41	54	-13	-65.52	-65.37	8.17	-54.26

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

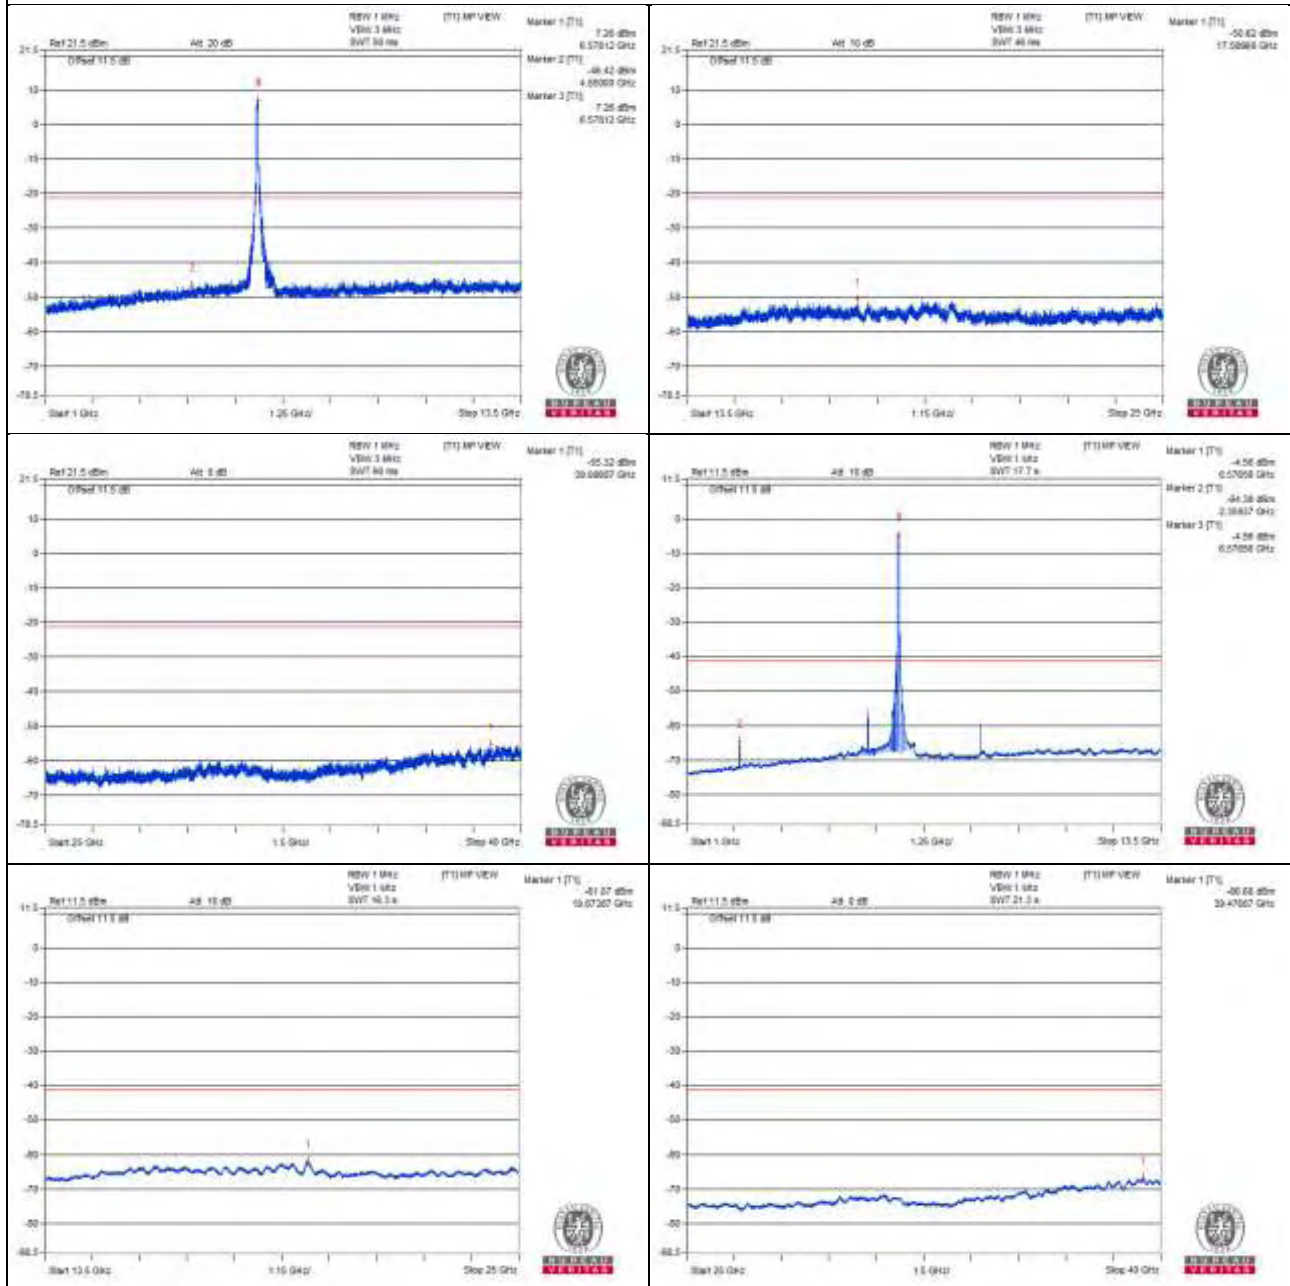

Chain 1

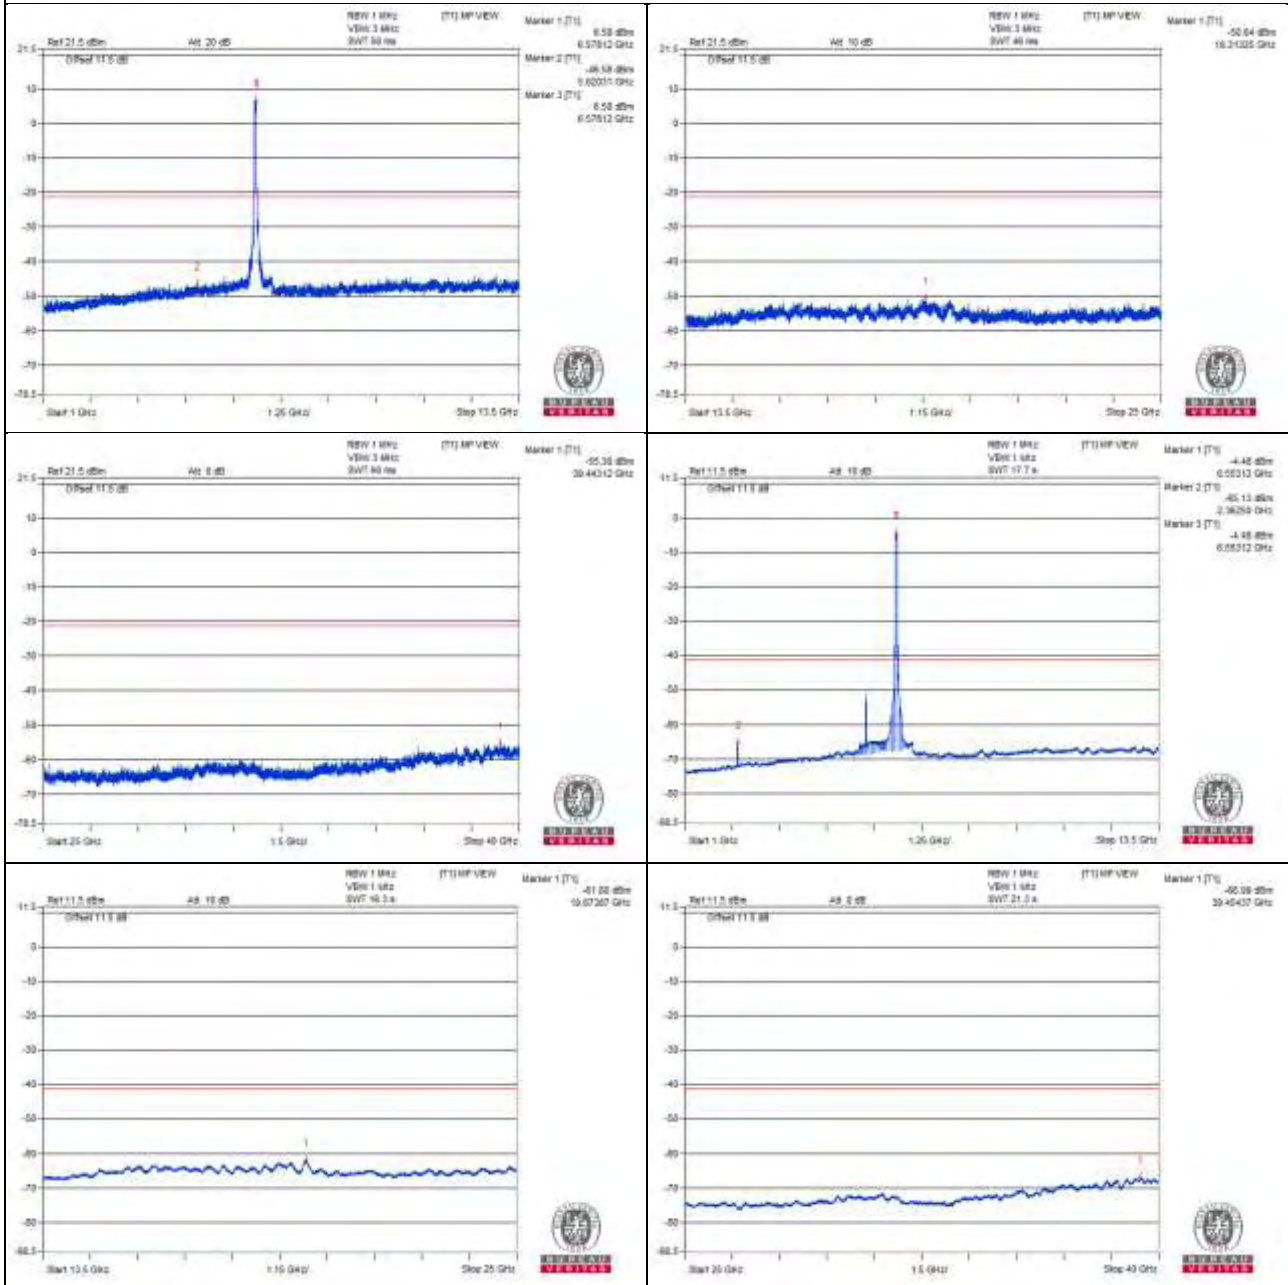

Channel 155

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	2521.87 PK	55.7	74	-18.3	-50.17	-51.4	8.17	-39.56
2	2518.75 AV	40.71	54	-13.29	-65.79	-65.67	8.17	-54.55
3	5481.25 PK	58.01	88.2	-30.19	-48.31	-48.56	8.17	-37.25
4	5487.5 AV	38.38	68.2	-29.82	-68.03	-68.09	8.17	-56.88
5	5759.37 PK	61.52	88.2	-26.68	-45.34	-44.54	8.17	-33.74
6	5759.37 AV	54.62	68.2	-13.58	-53.03	-50.88	8.17	-40.64
7	8965.62 PK	58.85	88.2	-29.35	-46.88	-48.44	8.17	-36.41
8	8967.18 AV	40.8	68.2	-27.4	-63.84	-68.77	8.17	-54.46
9	13454.68 PK	60.01	88.2	-28.19	-45.31	-47.93	8.17	-35.25
10	13454.68 AV	39.19	68.2	-29.01	-67.06	-67.45	8.17	-56.07
11	20174.31 PK	52.07	74	-21.93	-53.41	-55.6	8.17	-43.19
12	20175.75 AV	41.51	54	-12.49	-64.73	-65.15	8.17	-53.75

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

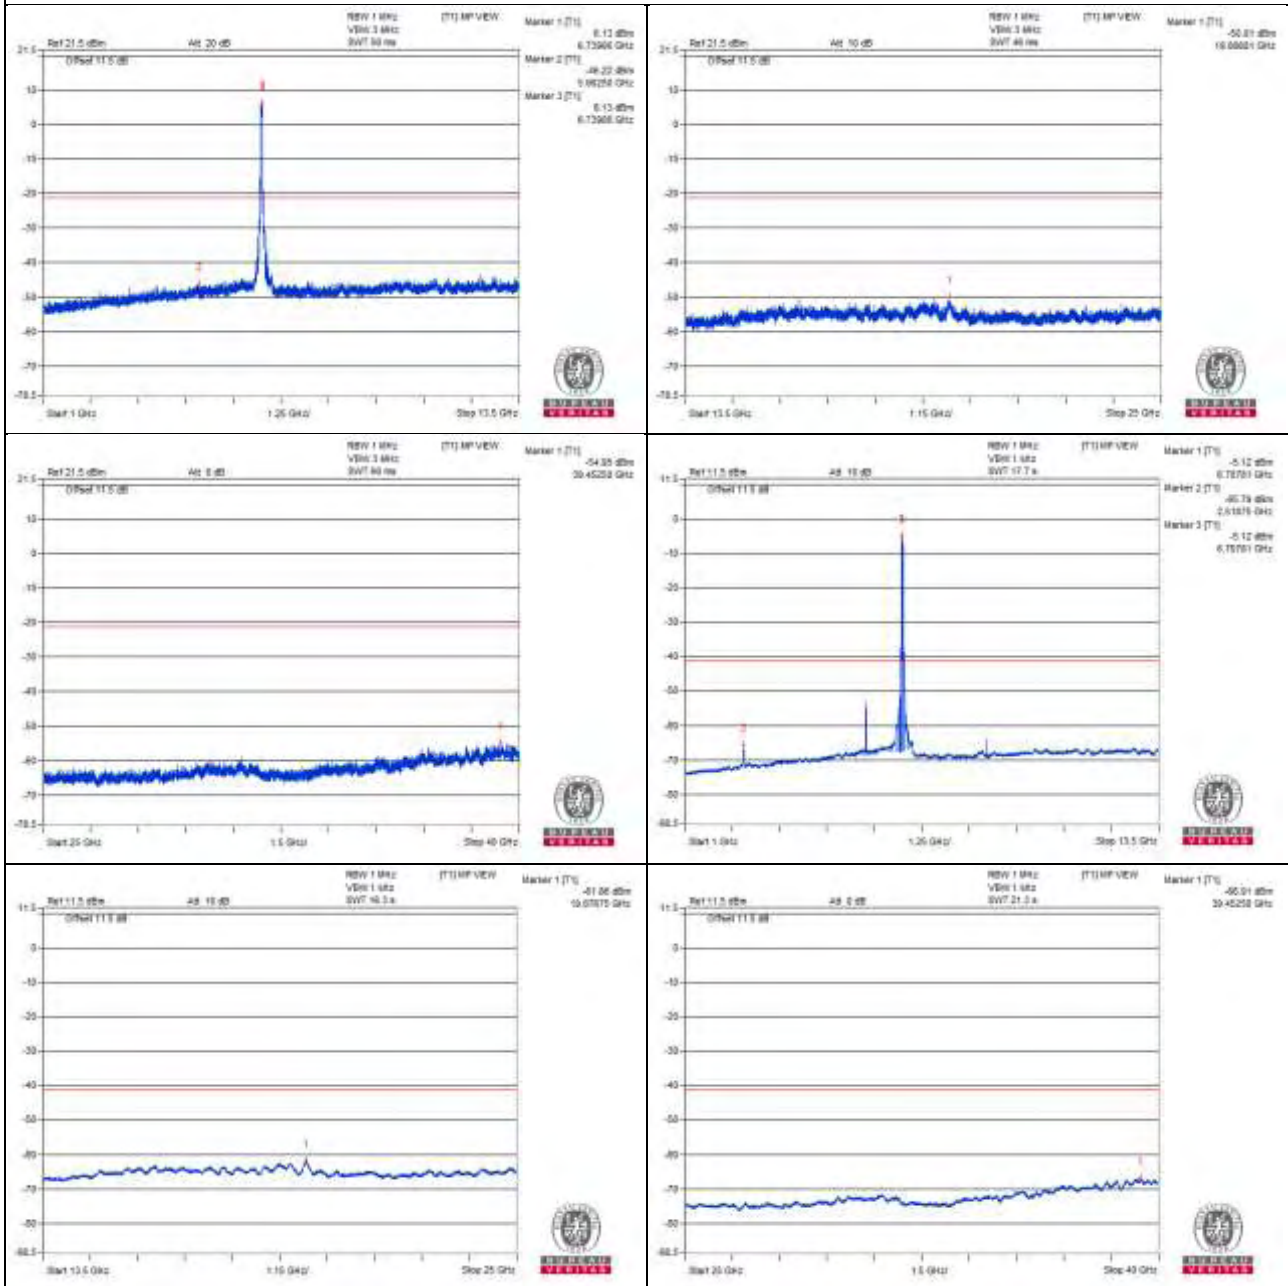

Chain 1

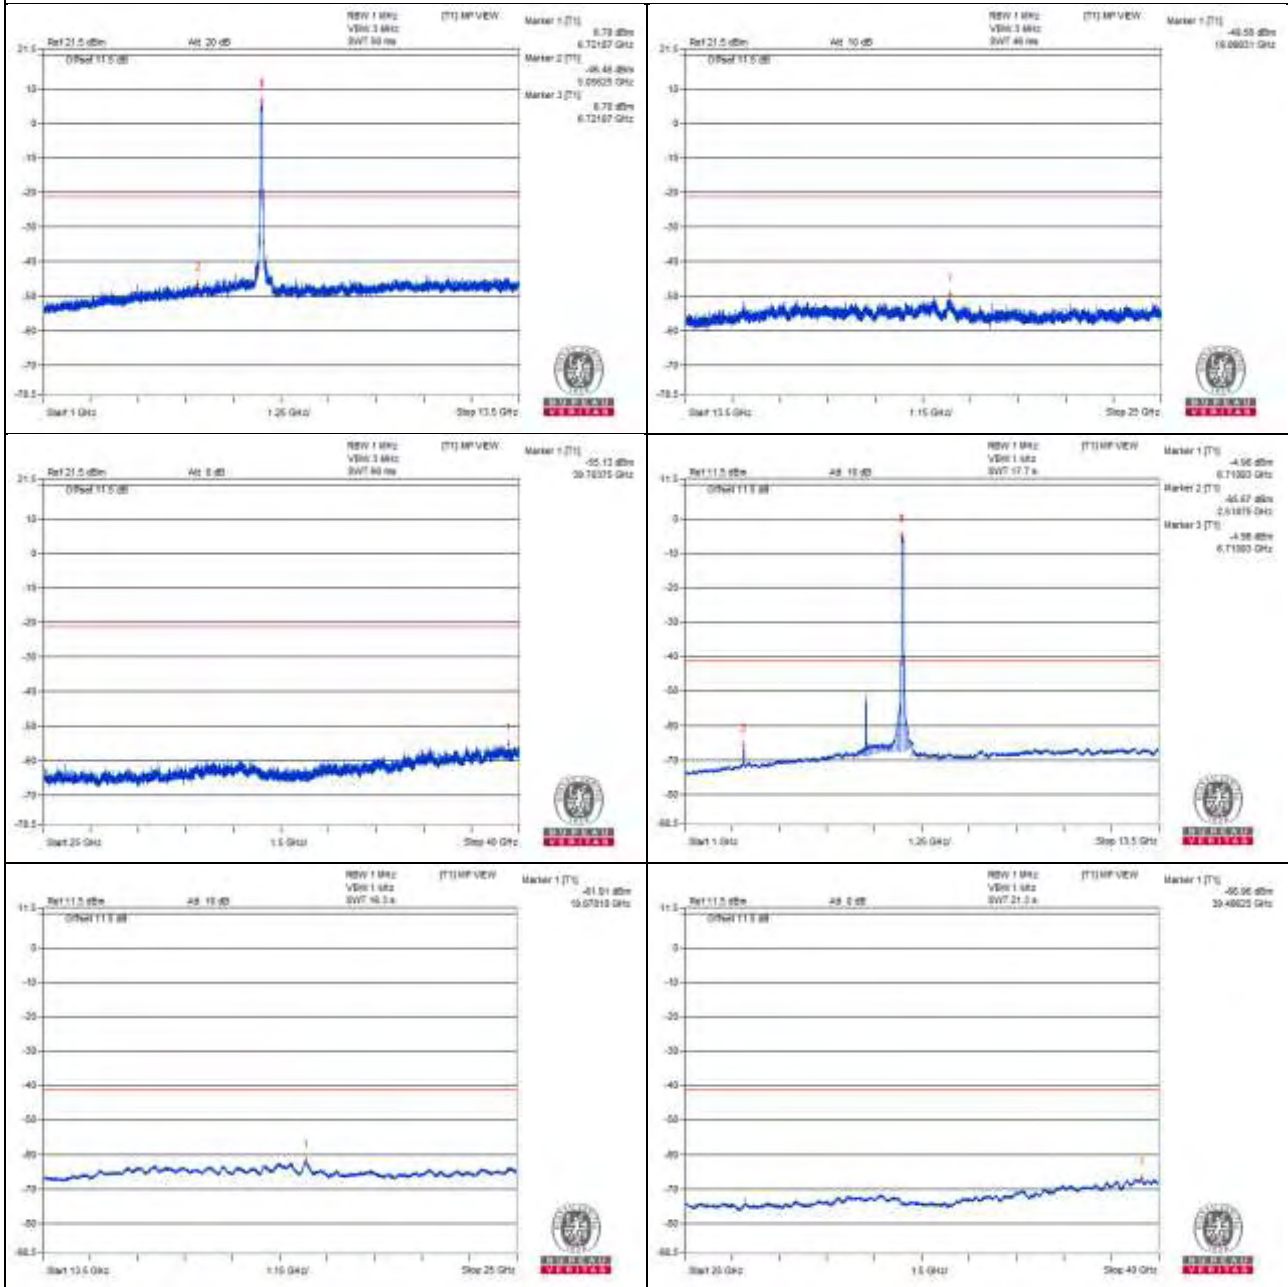

Channel 179

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	2637.5 PK	56.13	74	-17.87	-49.56	-51.21	8.17	-39.13
2	2639.06 AV	38.47	54	-15.53	-68.31	-67.65	8.17	-56.79
3	5485.93 PK	58.27	88.2	-29.93	-48.12	-48.23	8.17	-36.99
4	5487.5 AV	38.17	68.2	-30.03	-68	-68.55	8.17	-57.09
5	5759.37 PK	60.7	88.2	-27.5	-46.03	-45.47	8.17	-34.56
6	5759.37 AV	54.69	68.2	-13.51	-53.04	-50.76	8.17	-40.57
7	9123.43 PK	59.38	74	-14.62	-46.49	-47.72	8.17	-35.88
8	9126.56 AV	39.5	54	-14.5	-65.84	-68.42	8.17	-55.76
9	13689.75 PK	50.97	88.2	-37.23	-56.9	-54.4	8.17	-44.29
10	13688.31 AV	41.18	68.2	-27.02	-66.47	-64.32	8.17	-54.08
11	20535.12 PK	51.03	74	-22.97	-54.72	-56.22	8.17	-44.23
12	20532.25 AV	40.56	54	-13.44	-65.76	-66.01	8.17	-54.7

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

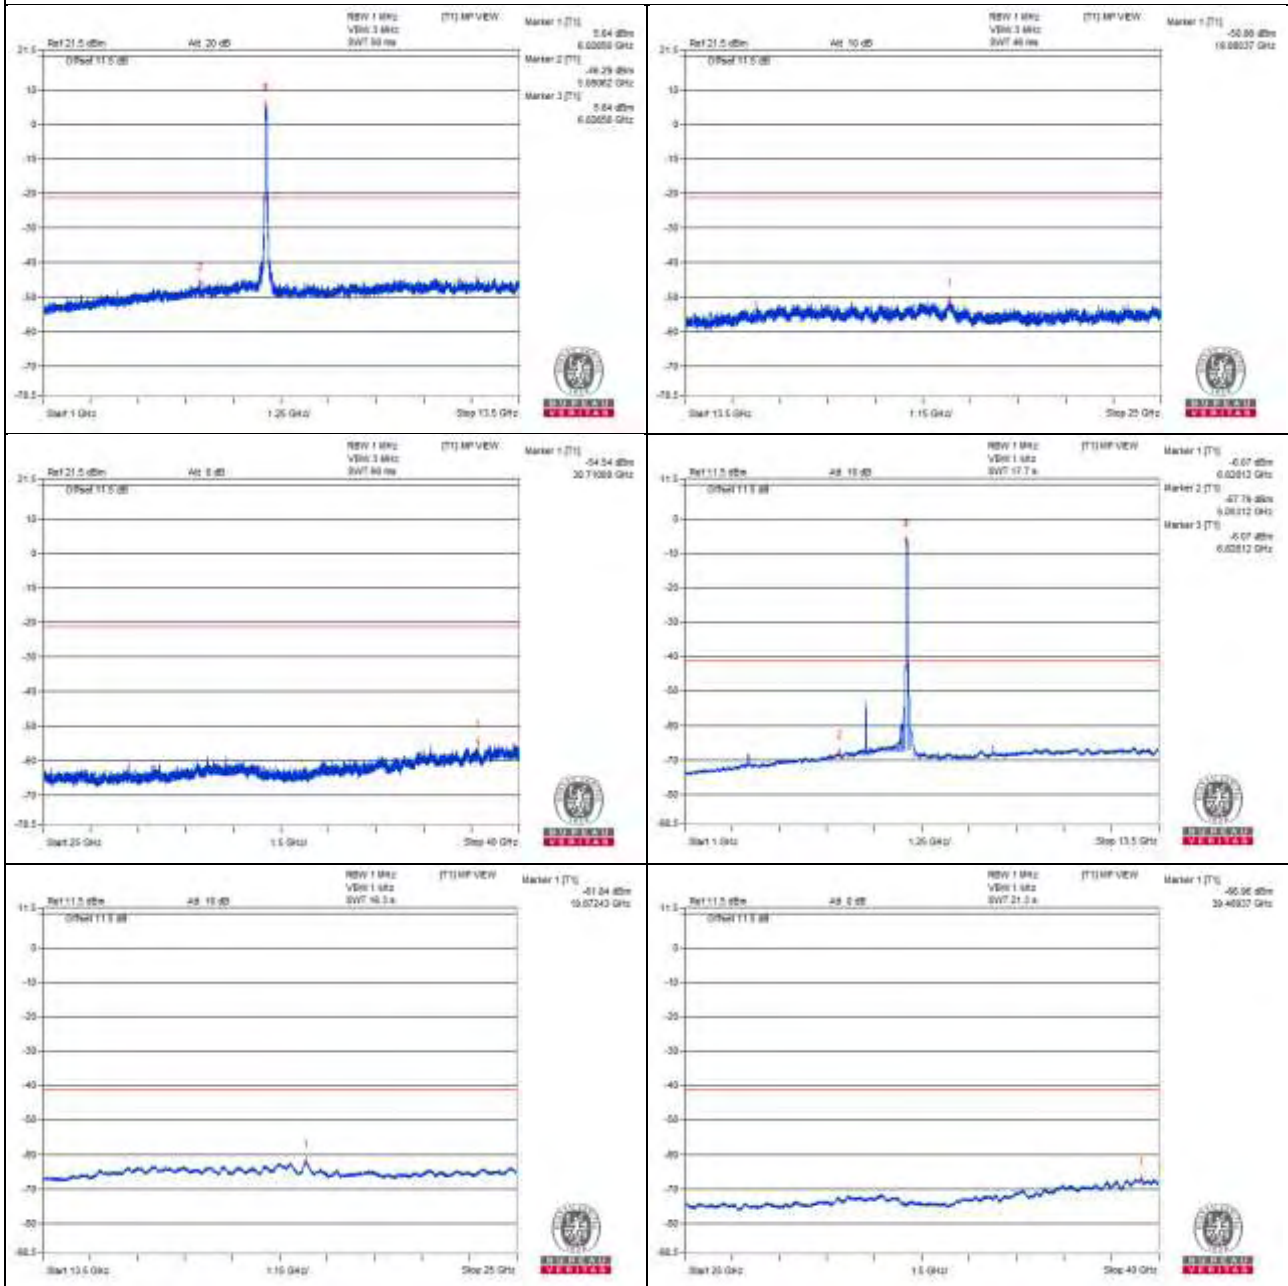

Chain 1

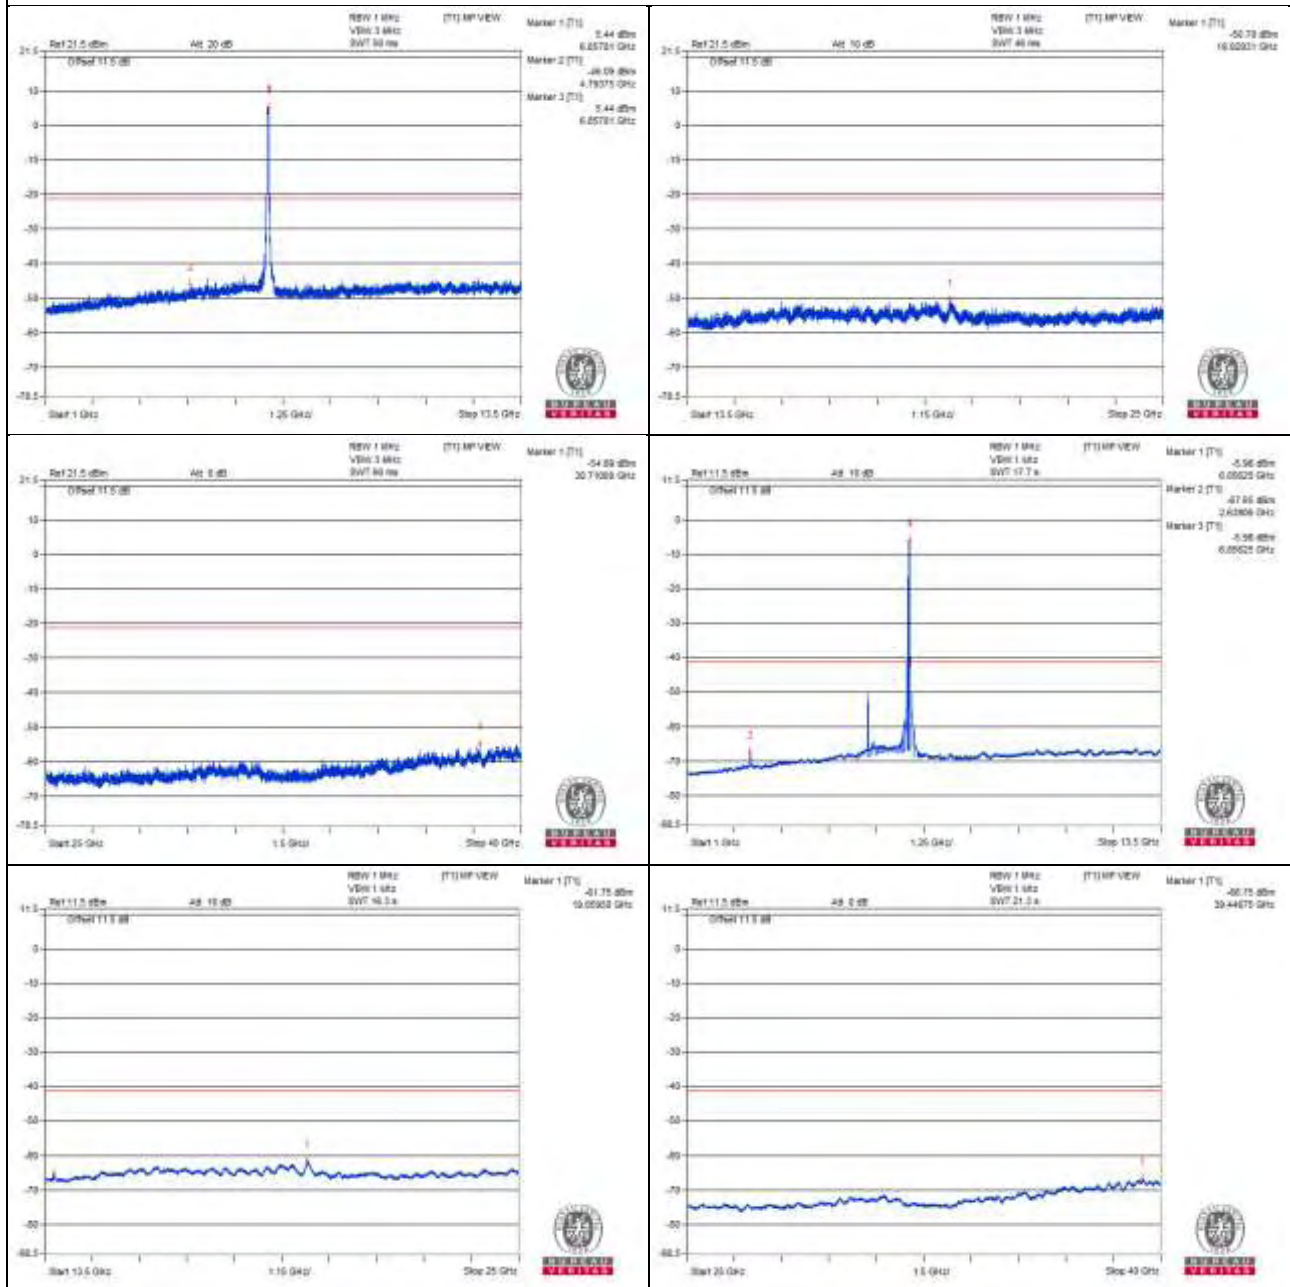

Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	7135 PK	59.68	88.2	-28.52	-46.83	-46.7	8.17	-35.58
2	7201.2 AV	47.04	68.2	-21.16	-59.44	-59.37	8.17	-48.22


Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8


d = measurement distance in 3 meters.

* The unwanted emission was verified and the test result was passed by radiated measurement.

Chain 0

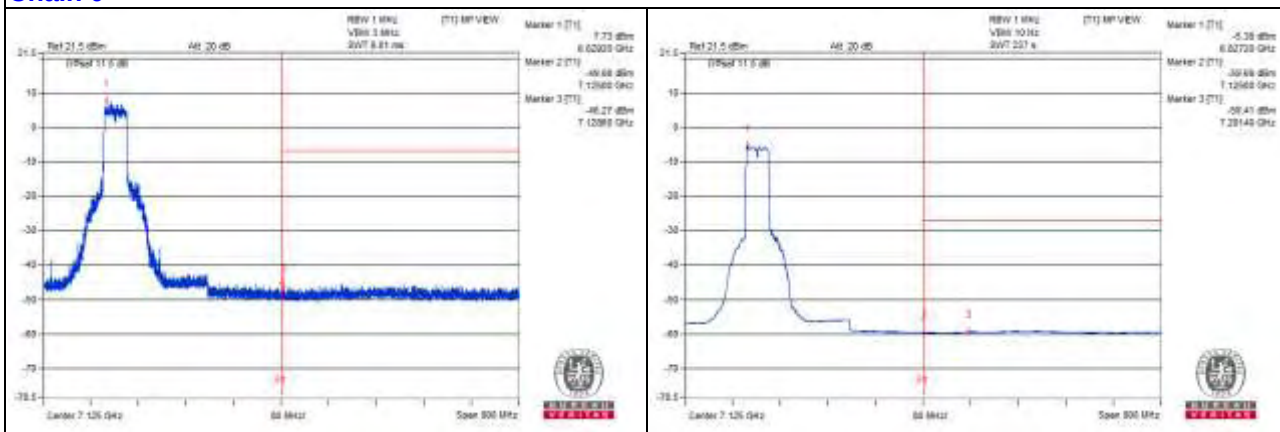

Chain 1

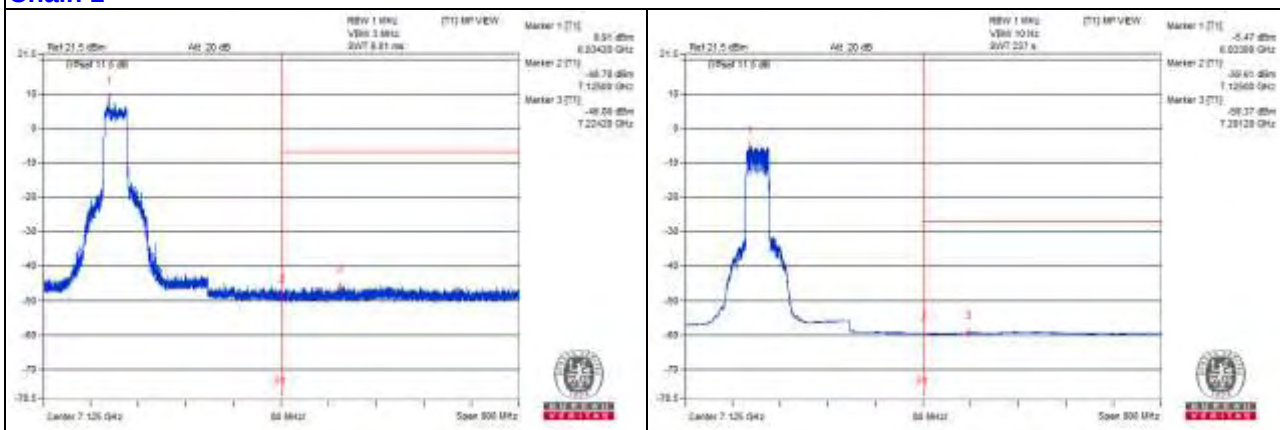

80MHz Preamble

RU996

Channel 7

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	1778.12 PK	53.94	74	-20.06	-52.48	-52.52	8.17	-41.32
2	1781.25 AV	38	54	-16	-68.75	-68.16	8.17	-57.26
3	5484.37 PK	58.71	88.2	-29.49	-49.25	-46.61	8.17	-36.55
4	5484.37 AV	39.11	68.2	-29.09	-66.61	-68.19	8.17	-56.15
5	5759.37 PK	62.45	88.2	-25.75	-43.89	-44.1	8.17	-32.81
6	5759.37 AV	50.38	68.2	-17.82	-53.16	-69.06	8.17	-44.88
7	7984.37 PK	58.95	88.2	-29.25	-48.21	-46.88	8.17	-36.31
8	7979.68 AV	45.3	68.2	-22.9	-59.77	-63.15	8.17	-49.96
9	11968.75 PK	60.52	74	-13.48	-44.72	-47.59	8.17	-34.74
10	11970.31 AV	39.47	54	-14.53	-67.34	-66.63	8.17	-55.79
11	17953.37 PK	51.45	74	-22.55	-55.45	-54.57	8.17	-43.81
12	17953.37 AV	41.32	54	-12.68	-65.11	-65.13	8.17	-53.94

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

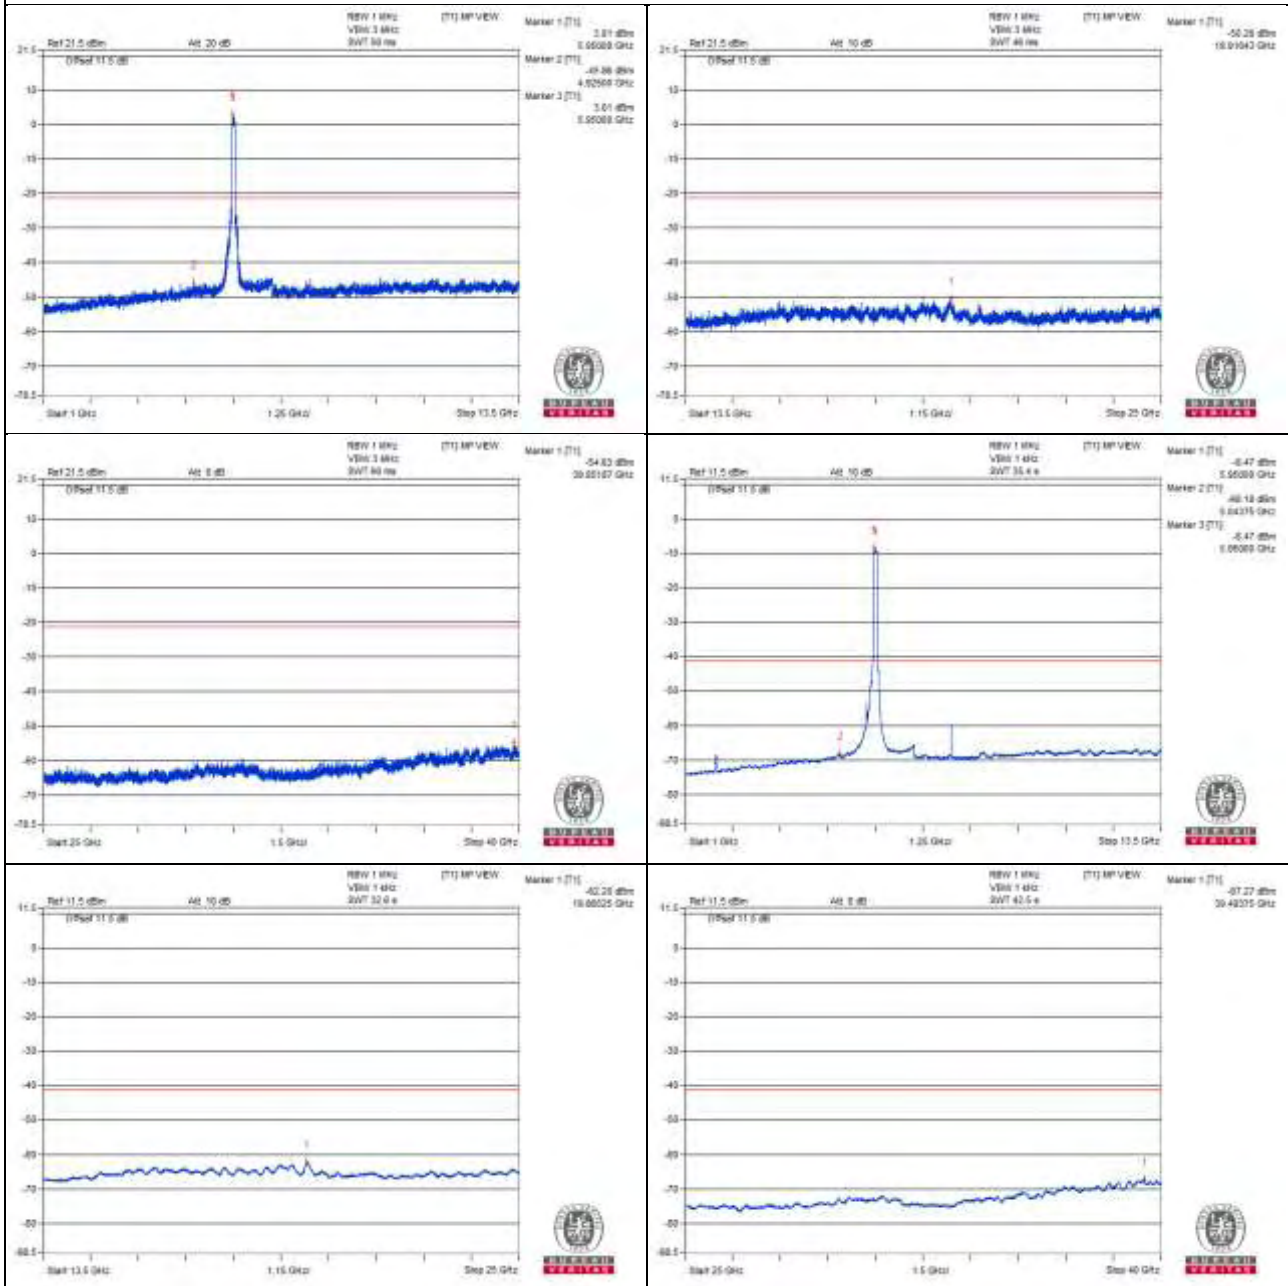

Chain 1

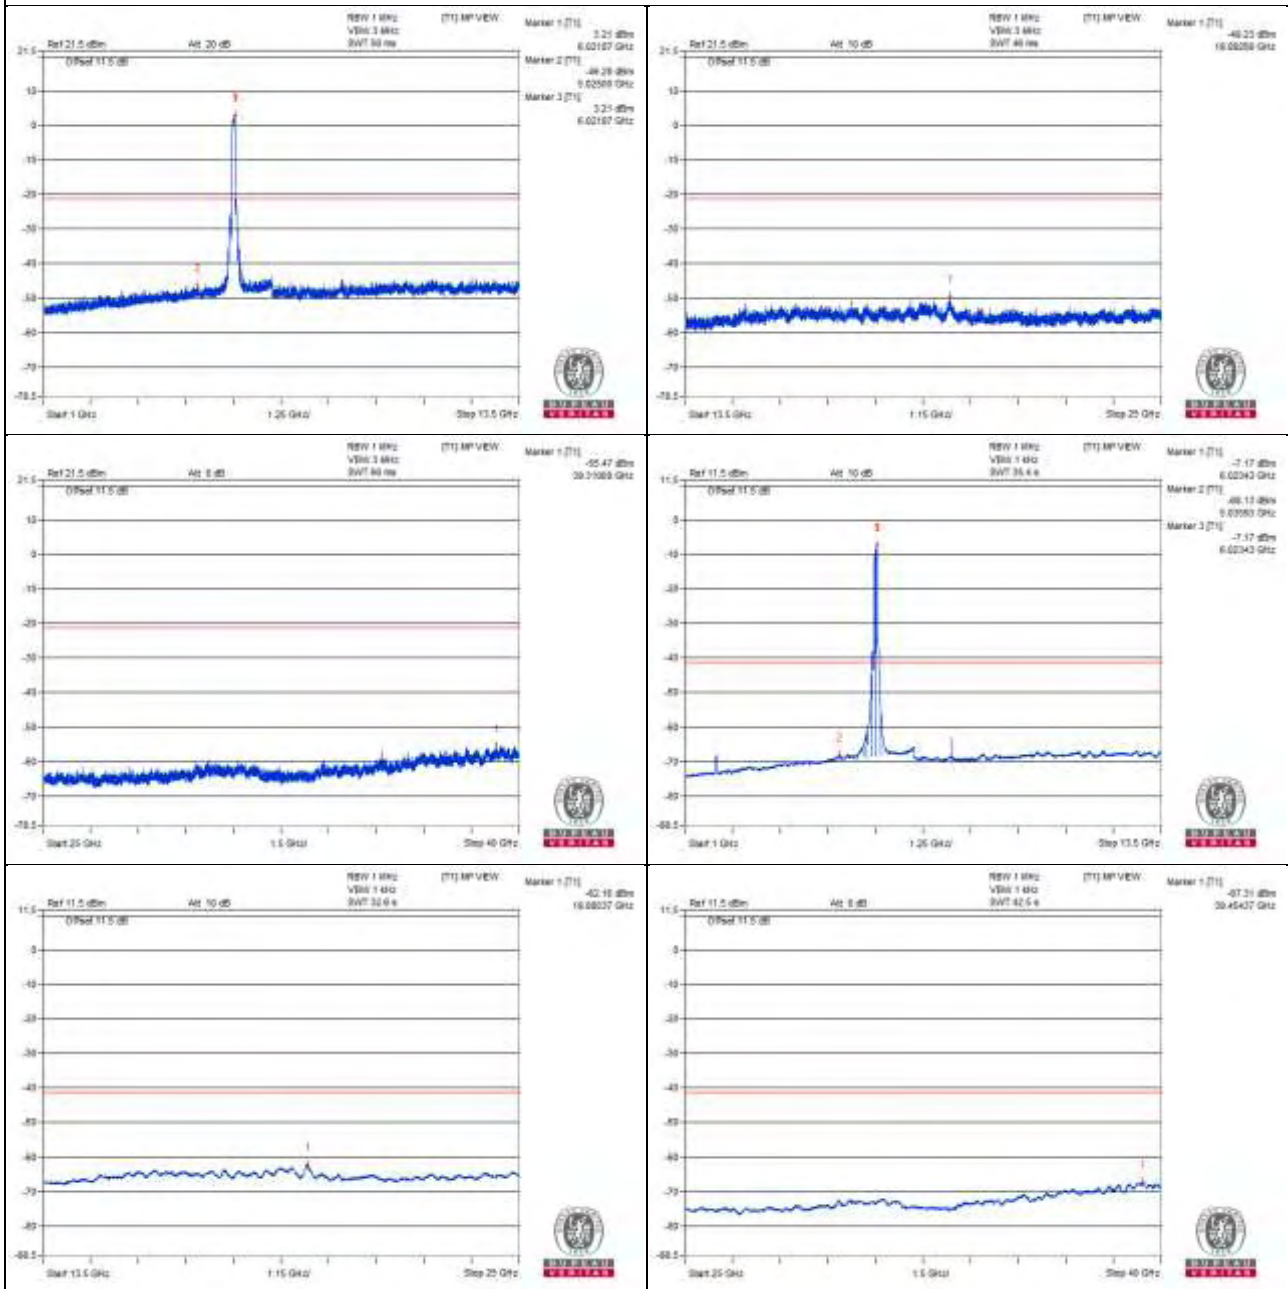

Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5891.42 PK	82.92	88.2	-5.28	-24.83	-22.48	8.15	-12.34
2	5901.17 AV	66.61	68.2	-1.59	-42.22	-38.27	8.15	-28.65


Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8


d = measurement distance in 3 meters.

* The unwanted emission was verified and the test result was passed by radiated measurement.

Chain 0

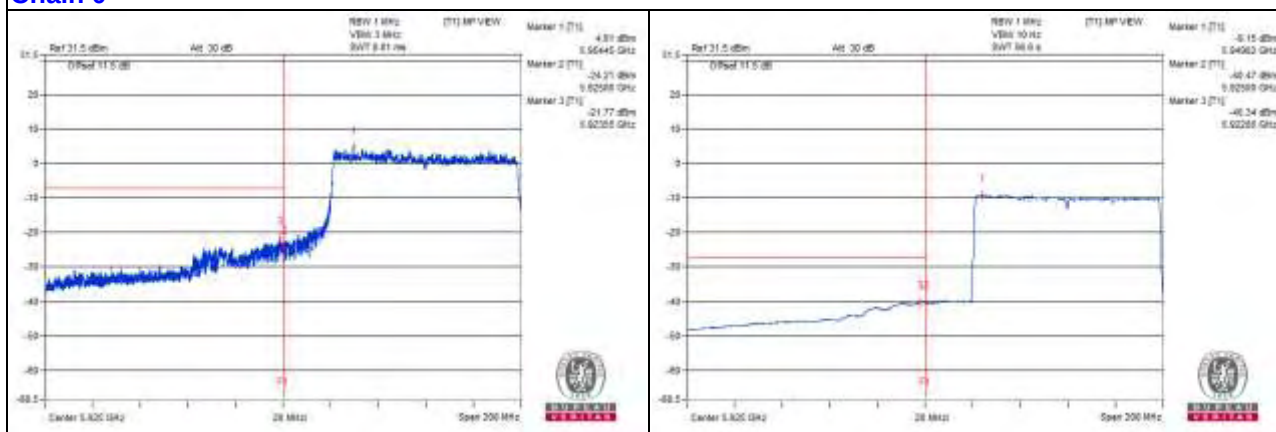

Chain 1

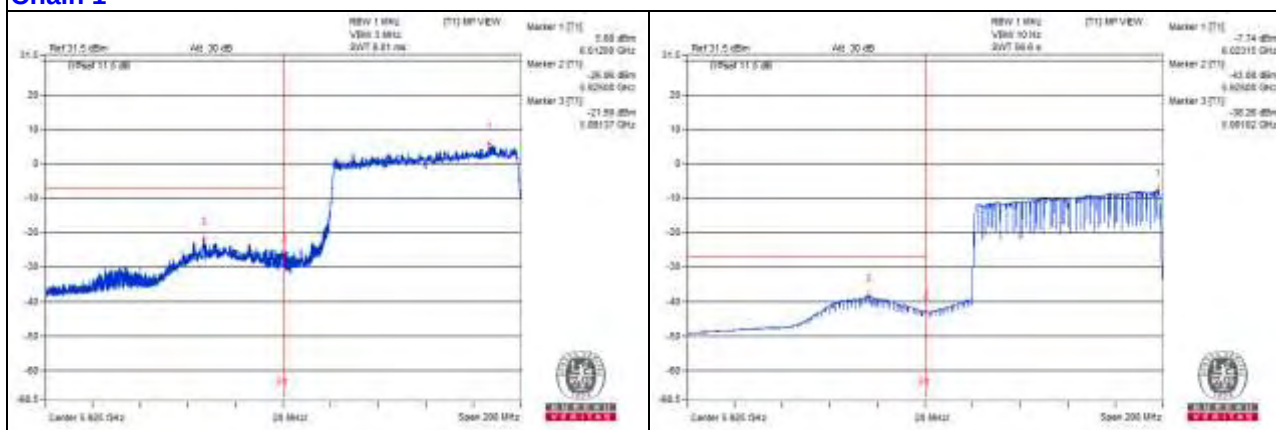

Channel 39

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	1943.75 PK	54.7	74	-19.3	-52.5	-51.09	8.17	-40.56
2	1935.93 AV	39.99	54	-14.01	-66.72	-66.2	8.17	-55.27
3	5484.37 PK	58.79	88.2	-29.41	-47.64	-47.67	8.17	-36.47
4	5482.81 AV	40.5	68.2	-27.7	-66.81	-65.21	8.17	-54.76
5	5760.93 PK	61.5	88.2	-26.7	-44.56	-45.35	8.17	-33.76
6	5759.37 AV	54.23	68.2	-13.97	-54.76	-50.62	8.17	-41.03
7	8196.87 PK	59.52	74	-14.48	-48.35	-45.84	8.17	-35.74
8	8193.75 AV	43.19	54	-10.81	-66.69	-61.35	8.17	-52.07
9	12292.18 PK	59.88	74	-14.12	-46.19	-46.96	8.17	-35.38
10	12289.06 AV	39.48	54	-14.52	-66.92	-67.01	8.17	-55.78
11	18433.5 PK	52.18	74	-21.82	-52.81	-56.45	8.17	-43.08
12	18432.06 AV	42.35	54	-11.65	-63.94	-64.25	8.17	-52.91

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

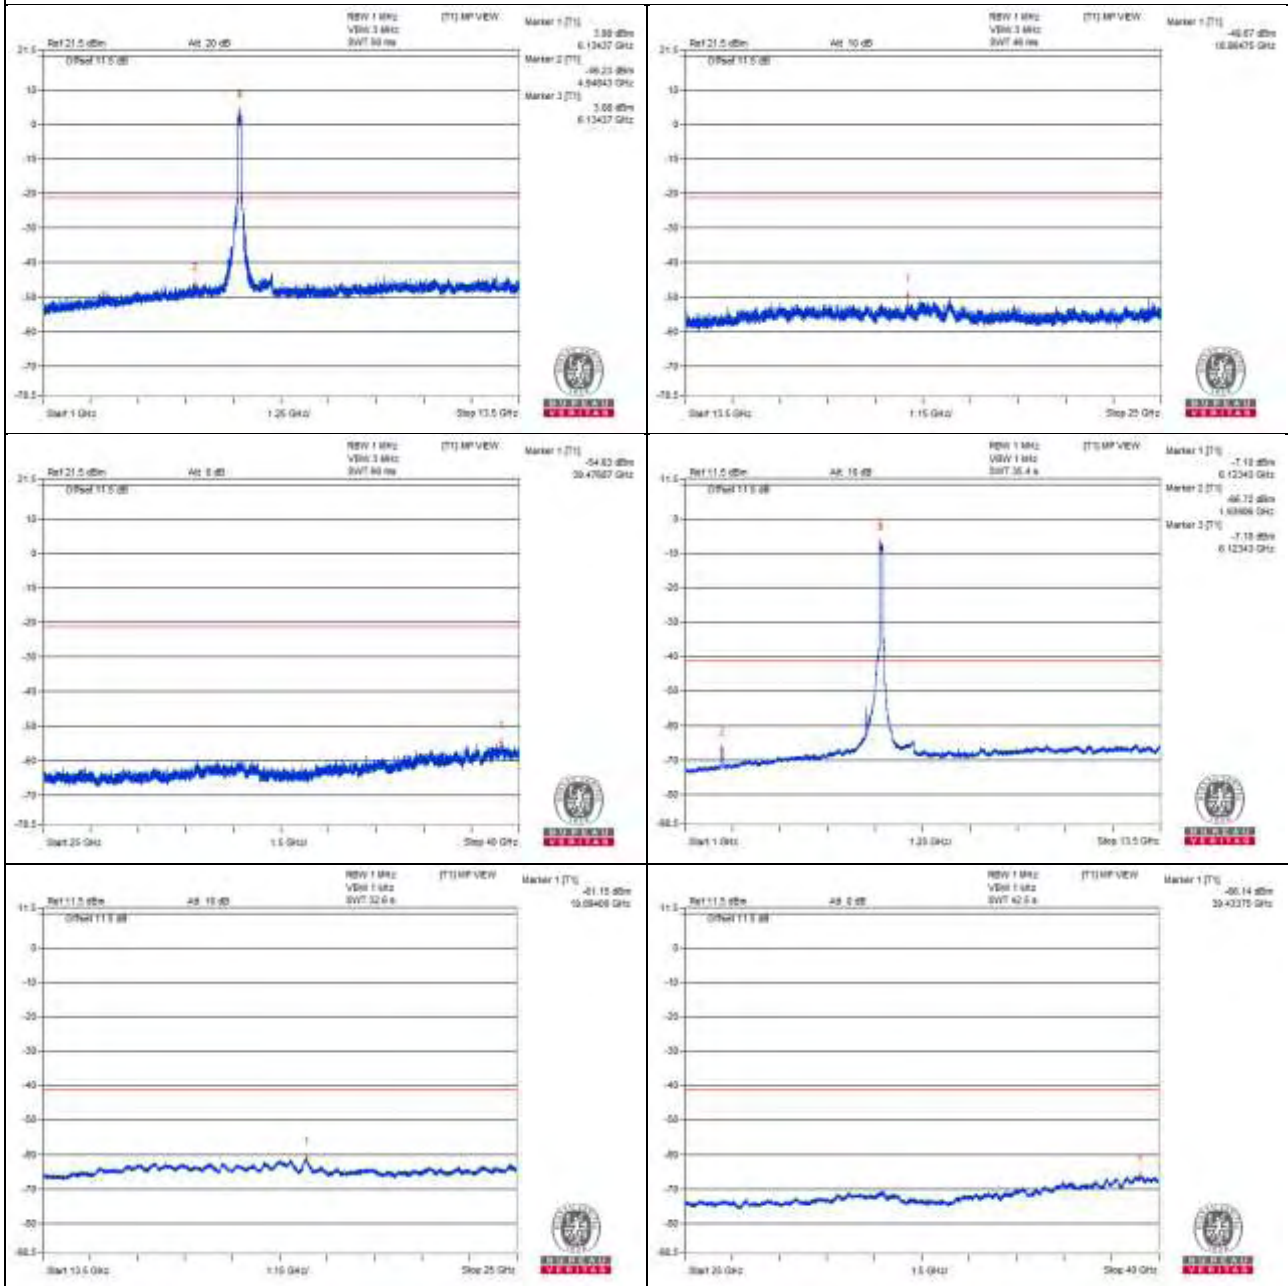

Chain 1

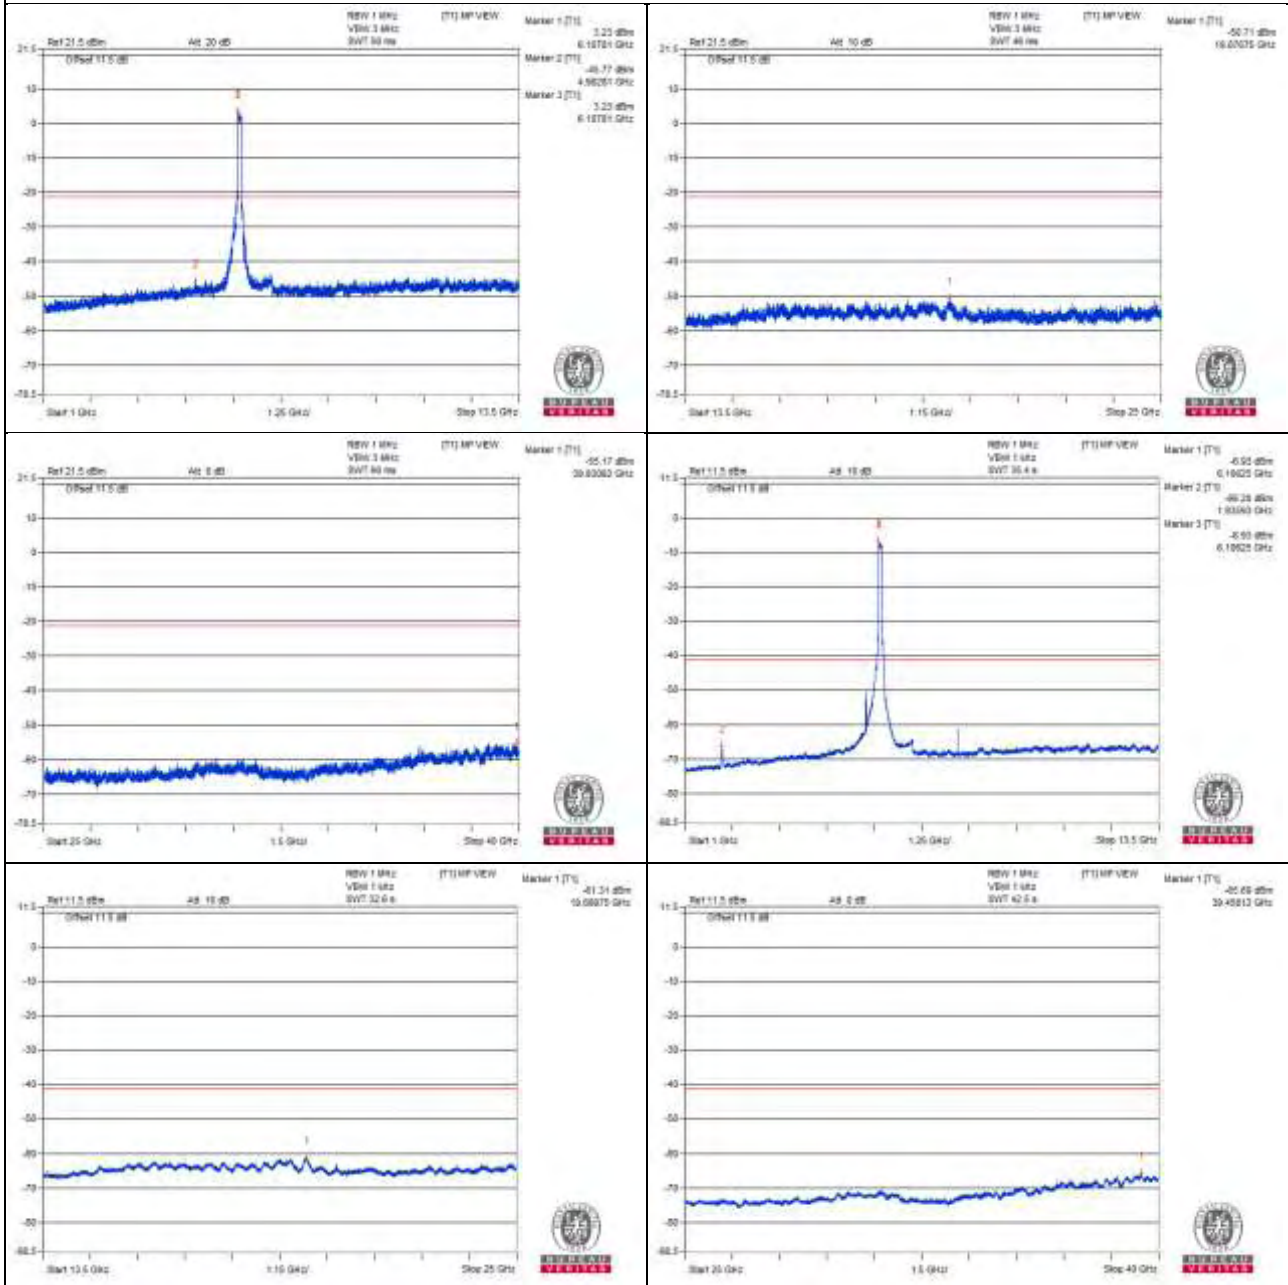

Channel 87

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	2184.37 PK	54.8	88.2	-33.4	-50.75	-52.75	8.17	-40.46
2	2179.68 AV	39.64	68.2	-28.56	-66.74	-66.86	8.17	-55.62
3	5479.68 PK	58.23	88.2	-29.97	-48.48	-47.95	8.17	-37.03
4	5484.37 AV	39.46	68.2	-28.74	-66.76	-67.21	8.17	-55.8
5	5764.06 PK	59.78	88.2	-28.42	-46.08	-47.34	8.17	-35.48
6	5759.37 AV	50.49	68.2	-17.71	-55.33	-56.68	8.17	-44.77
7	8517.18 PK	58.52	88.2	-29.68	-47.09	-48.96	8.17	-36.74
8	8514.06 AV	45.09	68.2	-23.11	-67.2	-58.95	8.17	-50.17
9	12773.43 PK	60.45	88.2	-27.75	-45.24	-46.9	8.17	-34.81
10	12770.31 AV	40.16	68.2	-28.04	-65.8	-66.83	8.17	-55.1
11	19158 PK	52.9	74	-21.1	-52.31	-55.25	8.17	-42.36
12	19159.43 AV	43.65	54	-10.35	-62.73	-62.86	8.17	-51.61

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

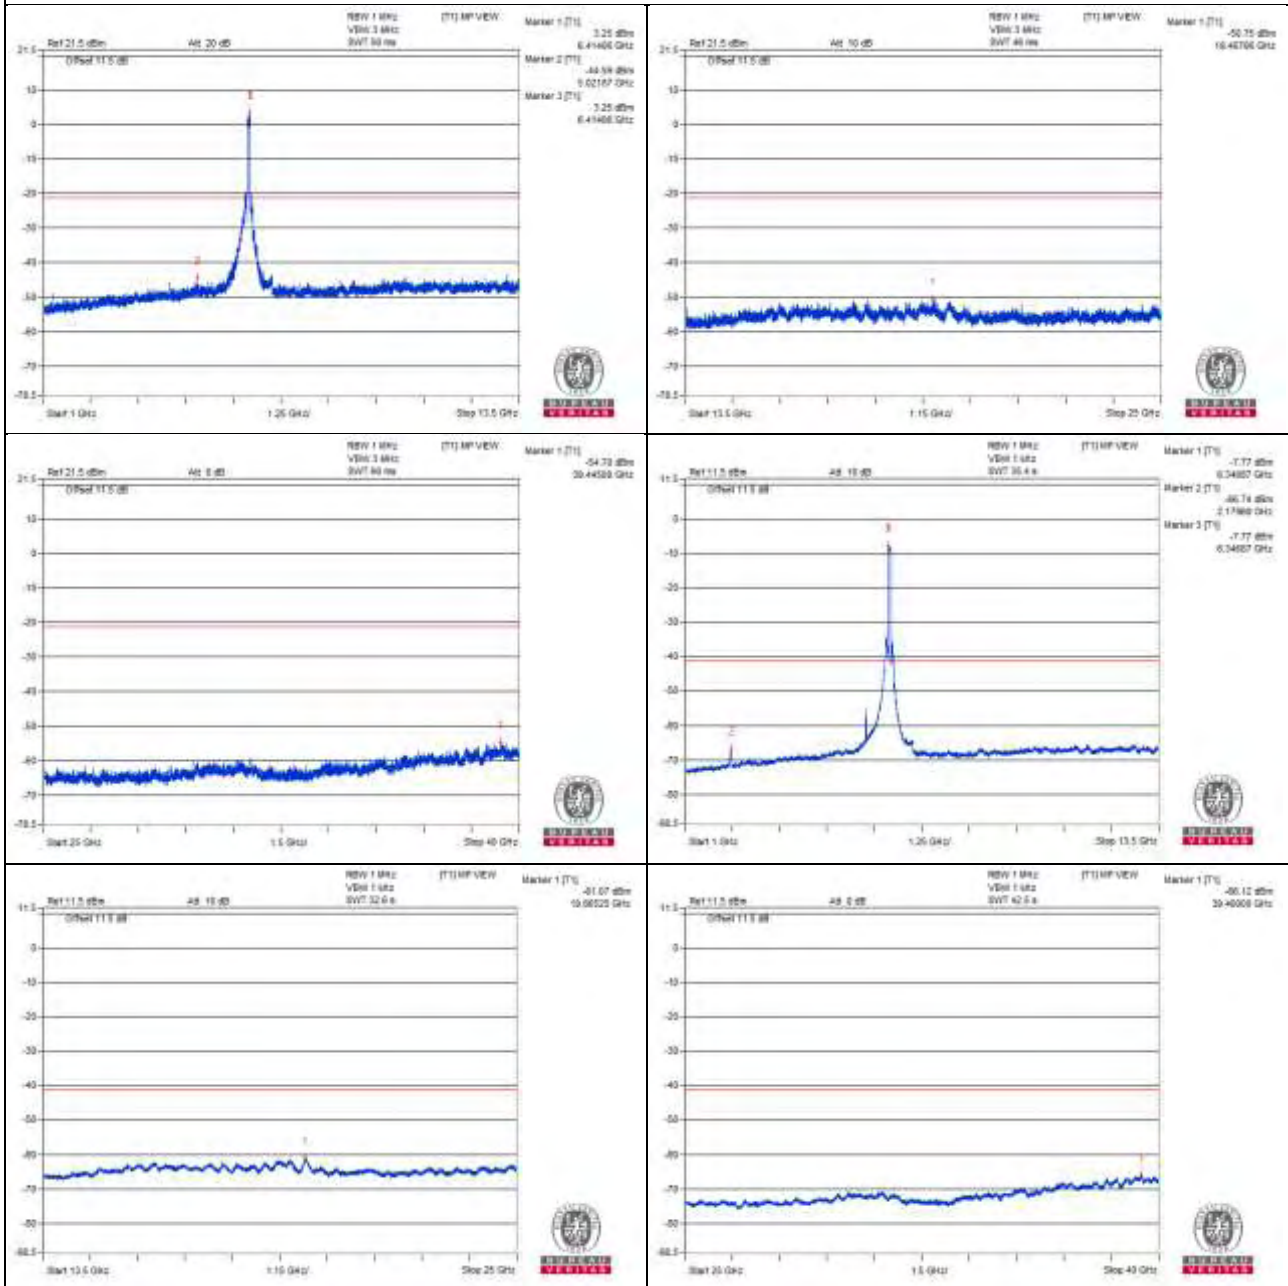

Chain 1

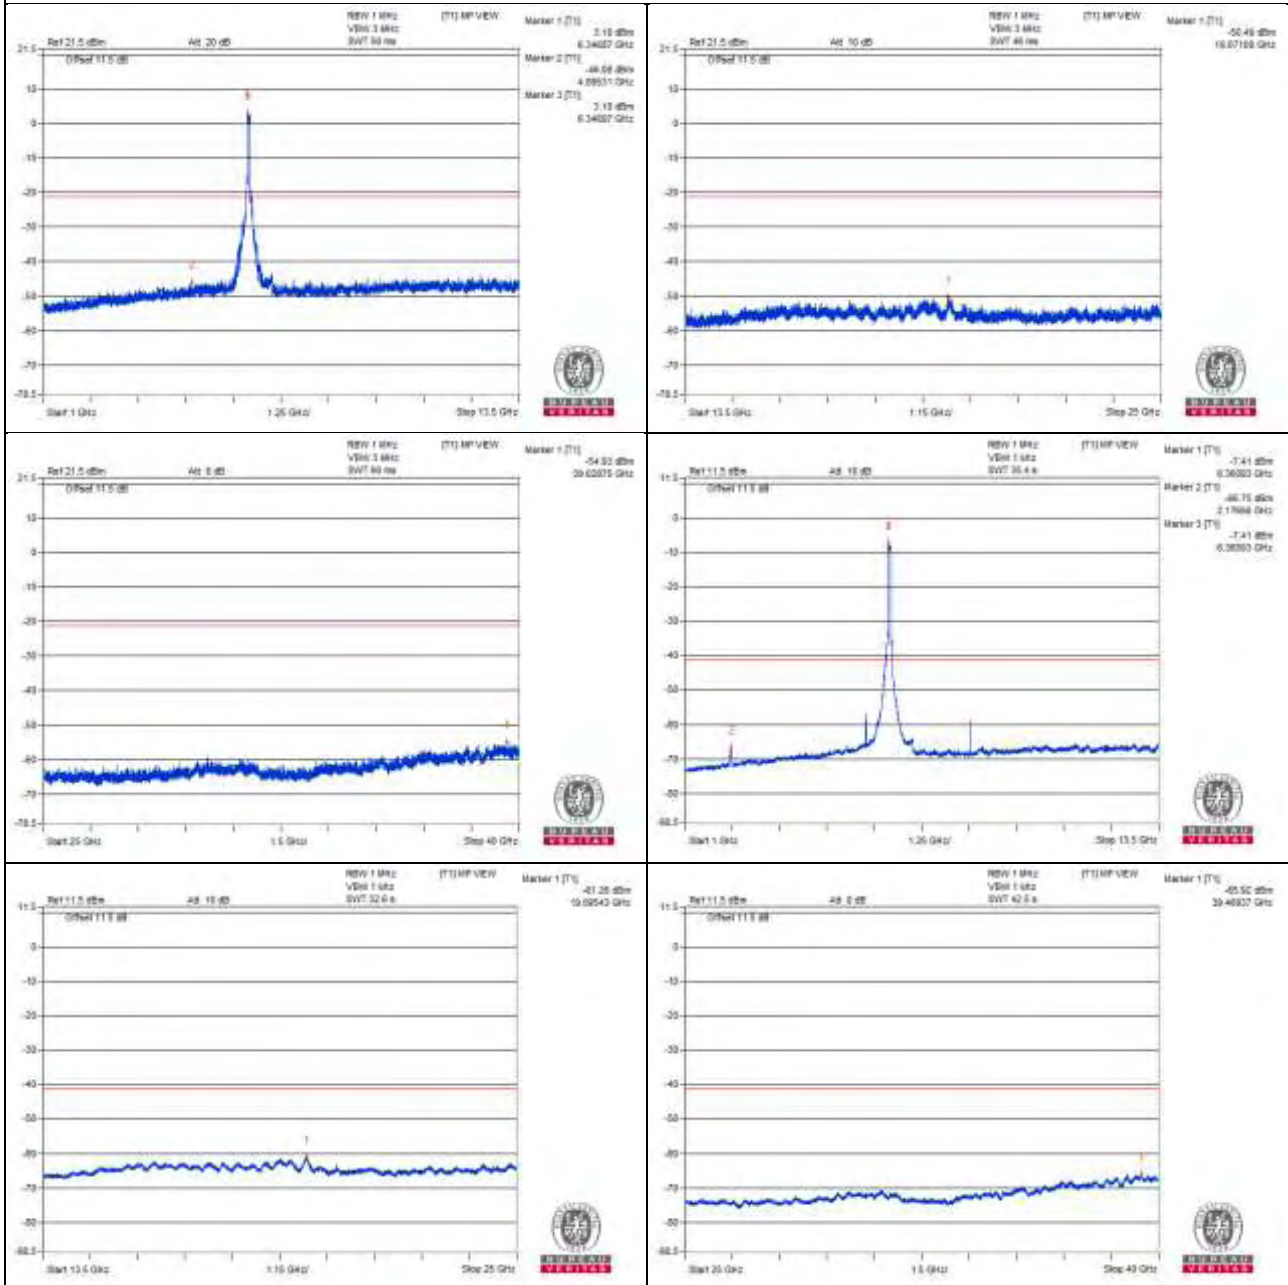

Channel 135

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	2415.62 PK	55.13	88.2	-33.07	-51.53	-51.1	8.17	-40.13
2	2418.75 AV	39.8	68.2	-28.4	-66.41	-66.88	8.17	-55.46
3	5484.37 PK	58.5	88.2	-29.7	-48.82	-47.21	8.17	-36.76
4	5482.81 AV	38.92	68.2	-29.28	-67.55	-67.5	8.17	-56.34
5	5759.37 PK	61.42	88.2	-26.78	-45.22	-44.83	8.17	-33.84
6	5759.37 AV	51.62	68.2	-16.58	-54.36	-55.34	8.17	-43.64
7	8835.93 PK	59.46	88.2	-28.74	-47.88	-46.23	8.17	-35.8
8	8832.81 AV	41.74	68.2	-26.46	-67.35	-63.07	8.17	-53.52
9	13246.87 PK	60.25	88.2	-27.95	-45.69	-46.75	8.17	-35.01
10	13246.87 AV	39.78	68.2	-28.42	-66.55	-66.78	8.17	-55.48
11	19871 PK	55.05	74	-18.95	-51.8	-51.02	8.17	-40.21
12	19872.43 AV	45.14	54	-8.86	-61.2	-61.41	8.17	-50.12

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

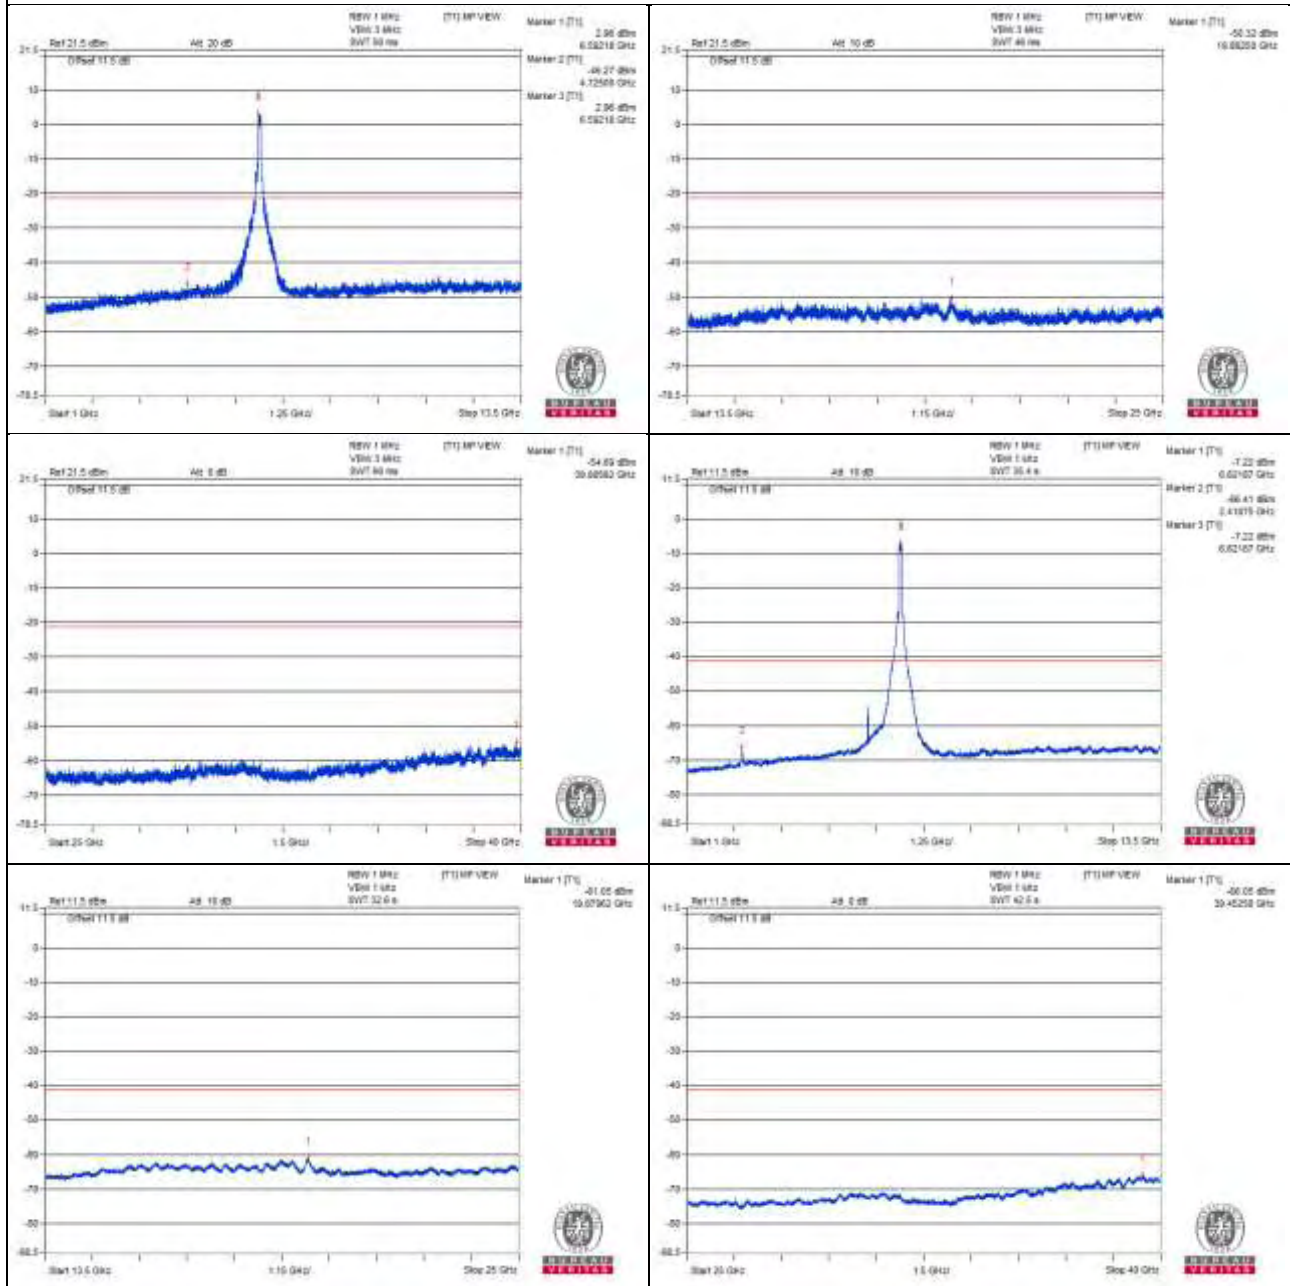

Chain 1

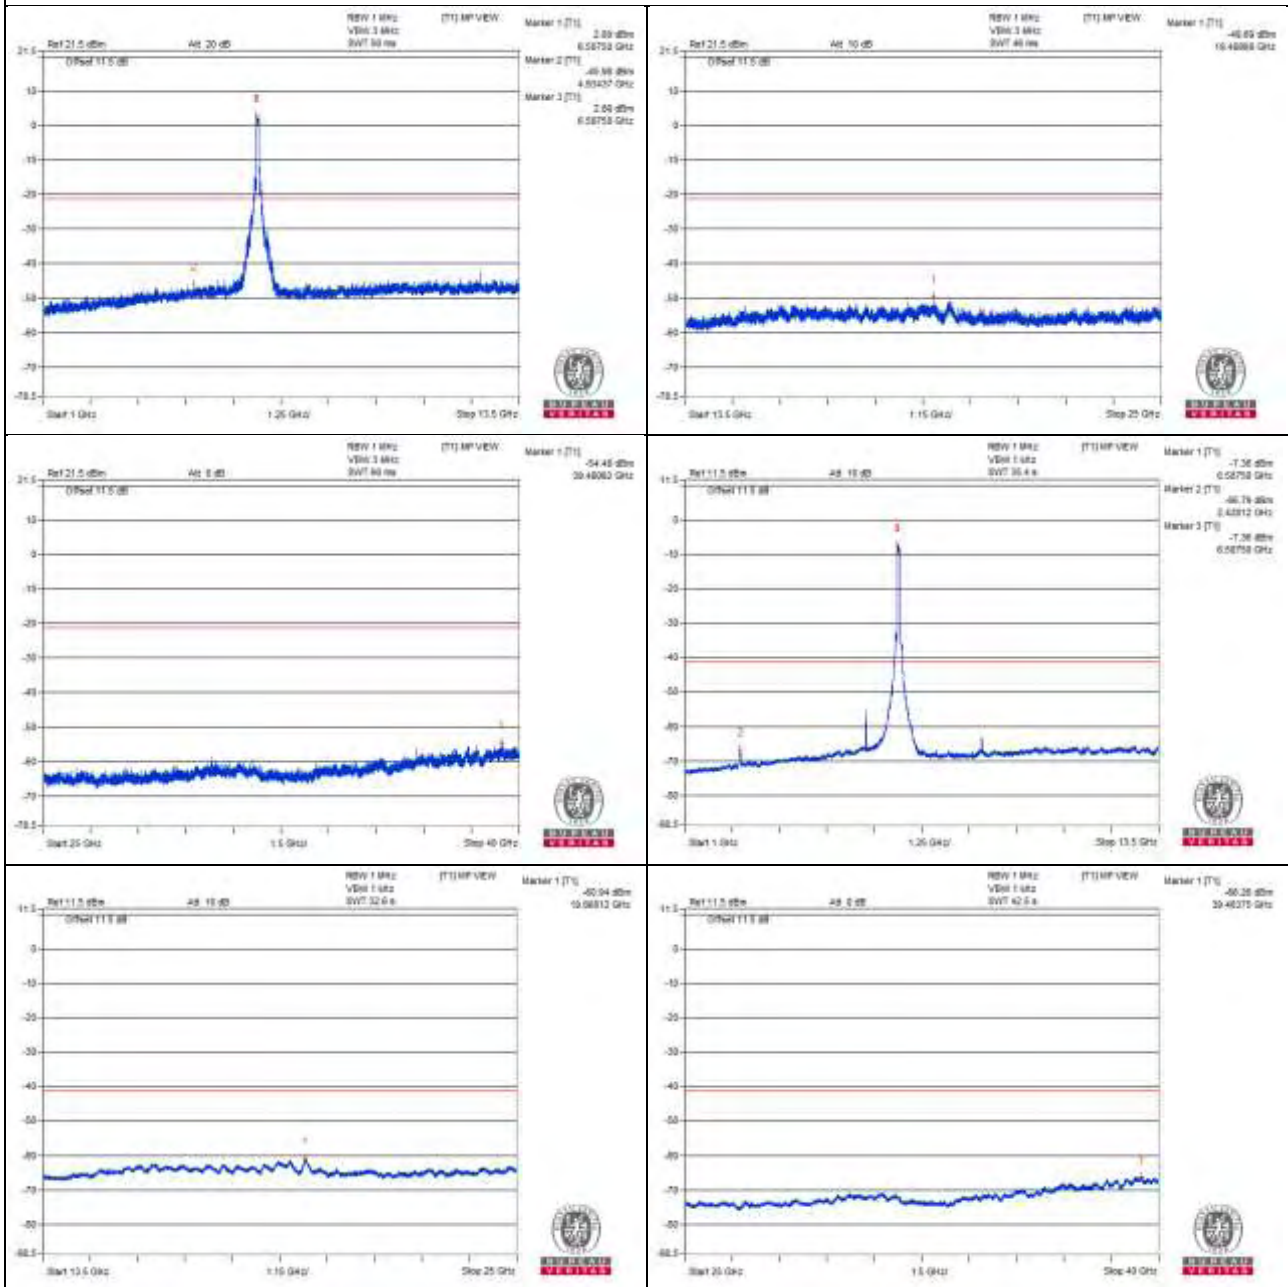

Channel 151

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	2495.31 PK	56.58	74	-17.42	-50.17	-49.58	8.17	-38.68
2	2498.43 AV	40.4	54	-13.6	-65.45	-66.72	8.17	-54.86
3	5484.37 PK	58.8	88.2	-29.4	-48.45	-46.95	8.17	-36.46
4	5485.93 AV	39.08	68.2	-29.12	-67.71	-67.04	8.17	-56.18
5	5759.37 PK	60.13	88.2	-28.07	-46.61	-46.03	8.17	-35.13
6	5759.37 AV	51.96	68.2	-16.24	-55.55	-53.63	8.17	-43.3
7	8939.06 PK	59.63	88.2	-28.57	-45.9	-47.96	8.17	-35.63
8	8940.62 AV	41.88	68.2	-26.32	-67.96	-62.68	8.17	-53.38
9	13406.25 PK	60.55	88.2	-27.65	-44.11	-48.95	8.17	-34.71
10	13414.06 AV	39.16	68.2	-29.04	-67.06	-67.52	8.17	-56.1
11	20111.06 PK	51.09	74	-22.91	-55.94	-54.84	8.17	-44.17
12	20119.68 AV	42.17	54	-11.83	-64.49	-64.07	8.17	-53.09

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

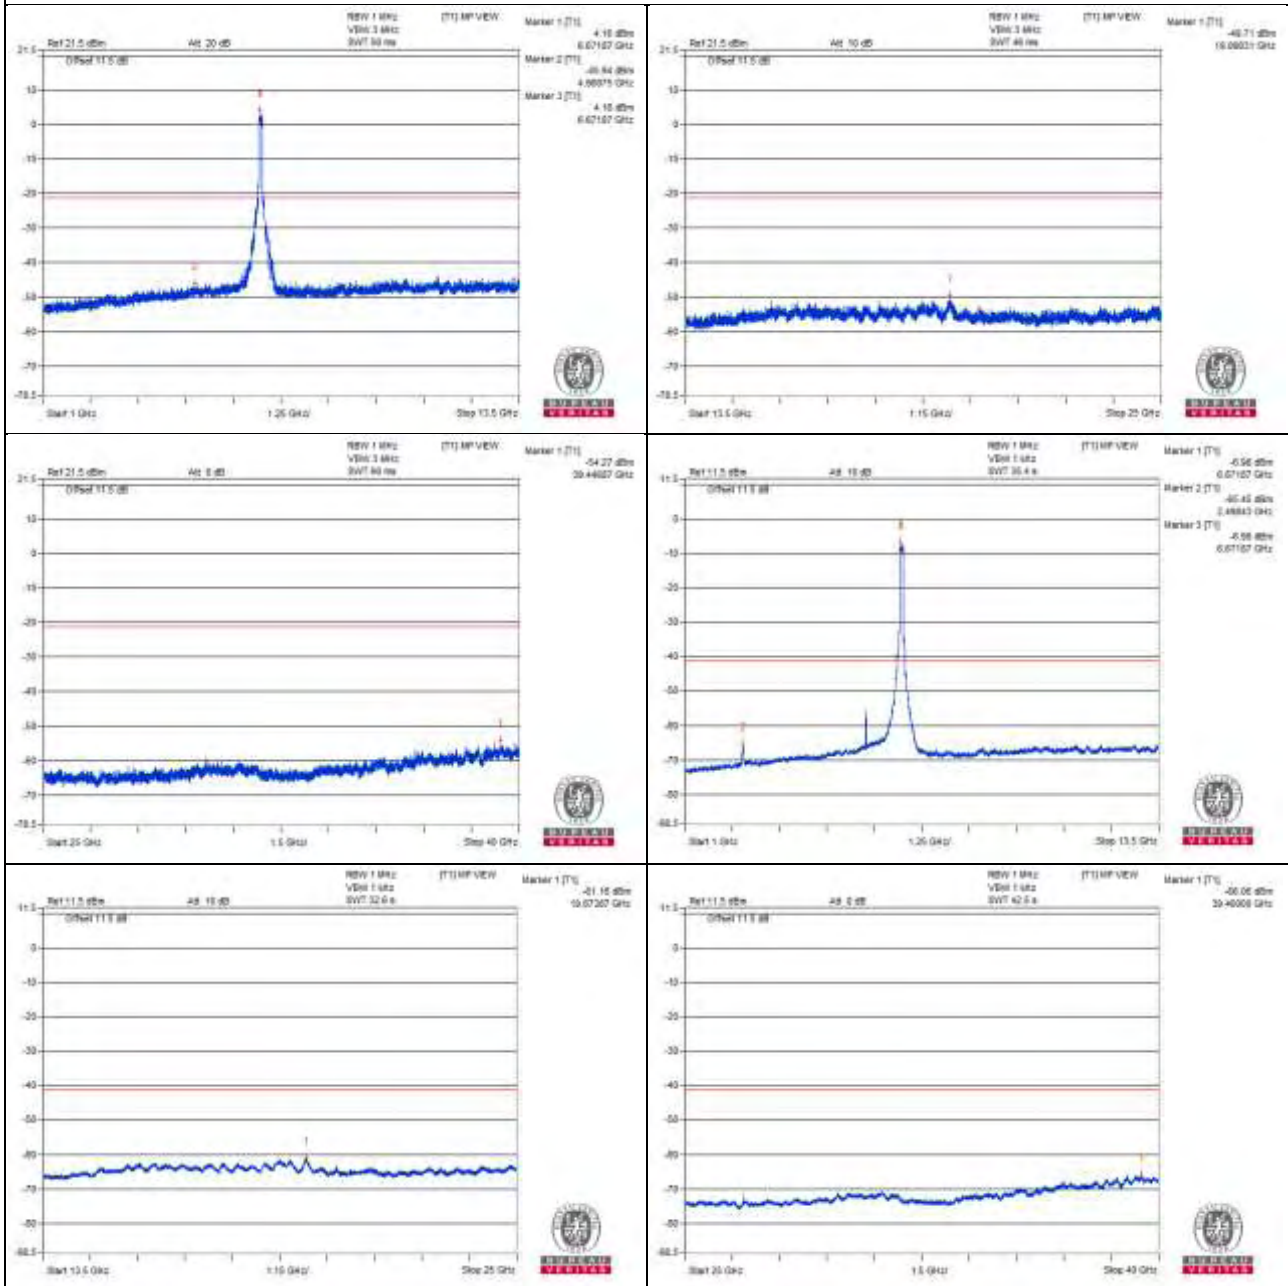

Chain 1

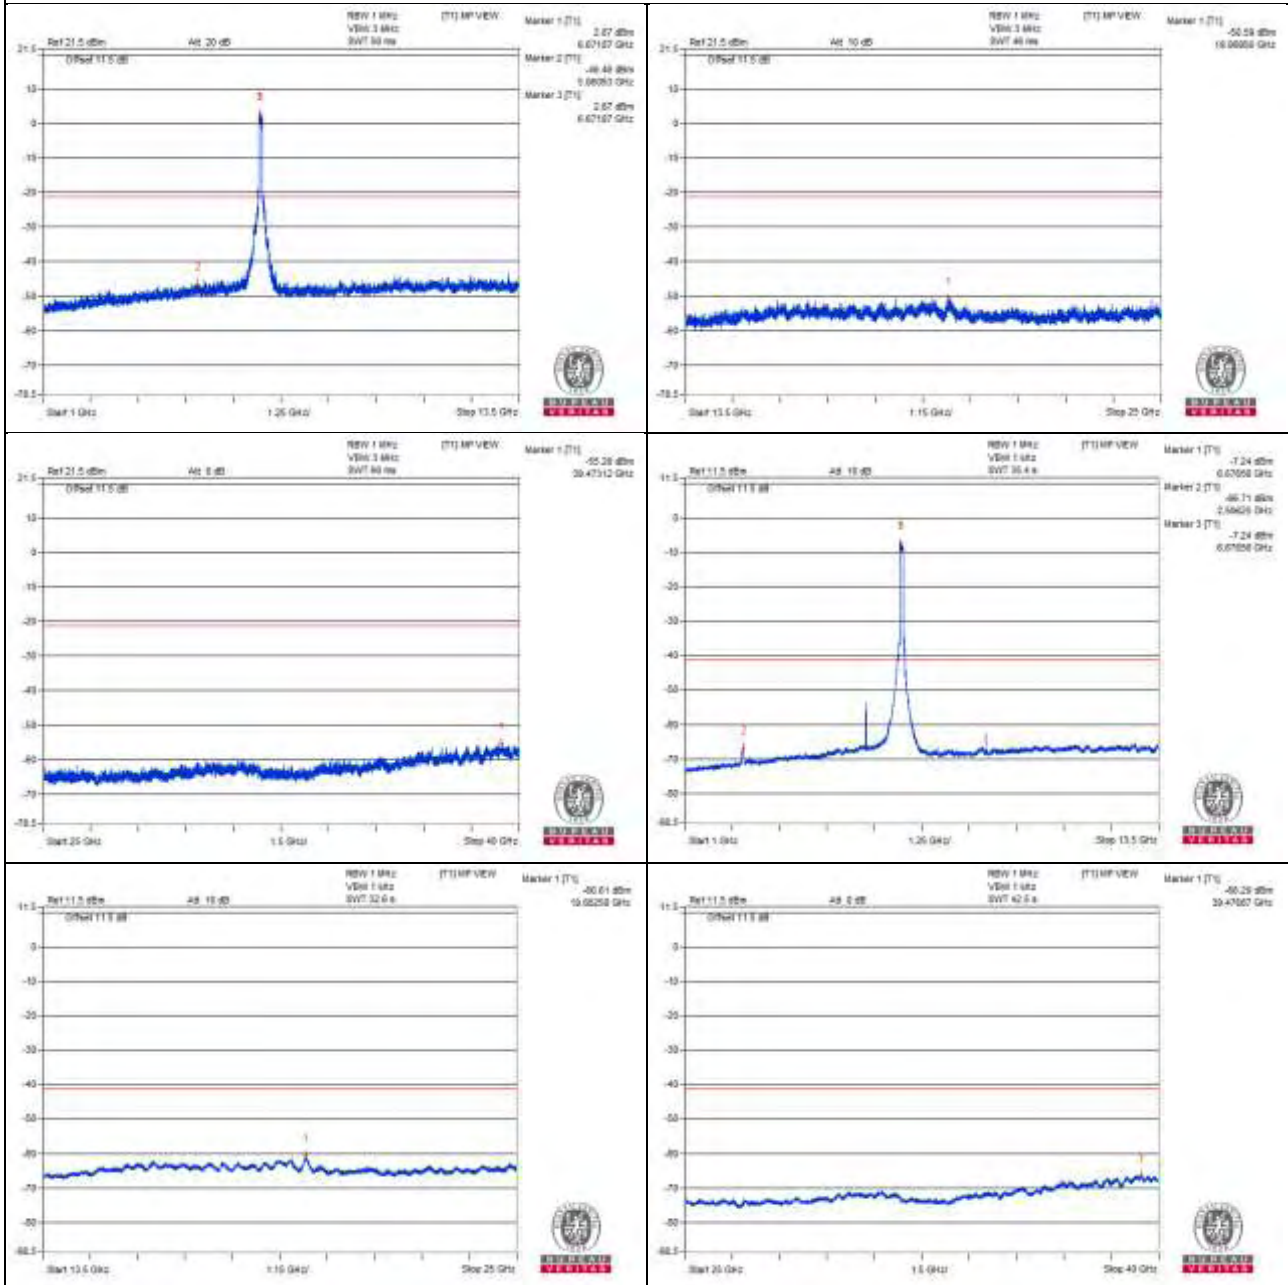

Channel 167

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	2584.37 PK	55.73	74	-18.27	-50.31	-51.15	8.17	-39.53
2	2579.68 AV	38.41	54	-15.59	-67.54	-68.58	8.17	-56.85
3	5487.5 PK	58.27	88.2	-29.93	-48.09	-48.25	8.17	-36.99
4	5482.81 AV	38.86	68.2	-29.34	-67.32	-67.85	8.17	-56.4
5	5759.37 PK	60.01	88.2	-28.19	-46.85	-46.04	8.17	-35.25
6	5759.37 AV	52.03	68.2	-16.17	-55.32	-53.66	8.17	-43.23
7	9045.31 PK	58.25	74	-15.75	-48.54	-47.87	8.17	-37.01
8	9046.87 AV	40.17	54	-13.83	-68.21	-64.94	8.17	-55.09
9	13574.75 PK	50.34	88.2	-37.86	-56.37	-55.85	8.17	-44.92
10	13567.56 AV	41.04	68.2	-27.16	-64.59	-66.4	8.17	-54.22
11	20352.56 PK	52.62	74	-21.38	-54.95	-52.93	8.17	-42.64
12	20359.75 AV	41.51	54	-12.49	-65.11	-64.75	8.17	-53.75

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

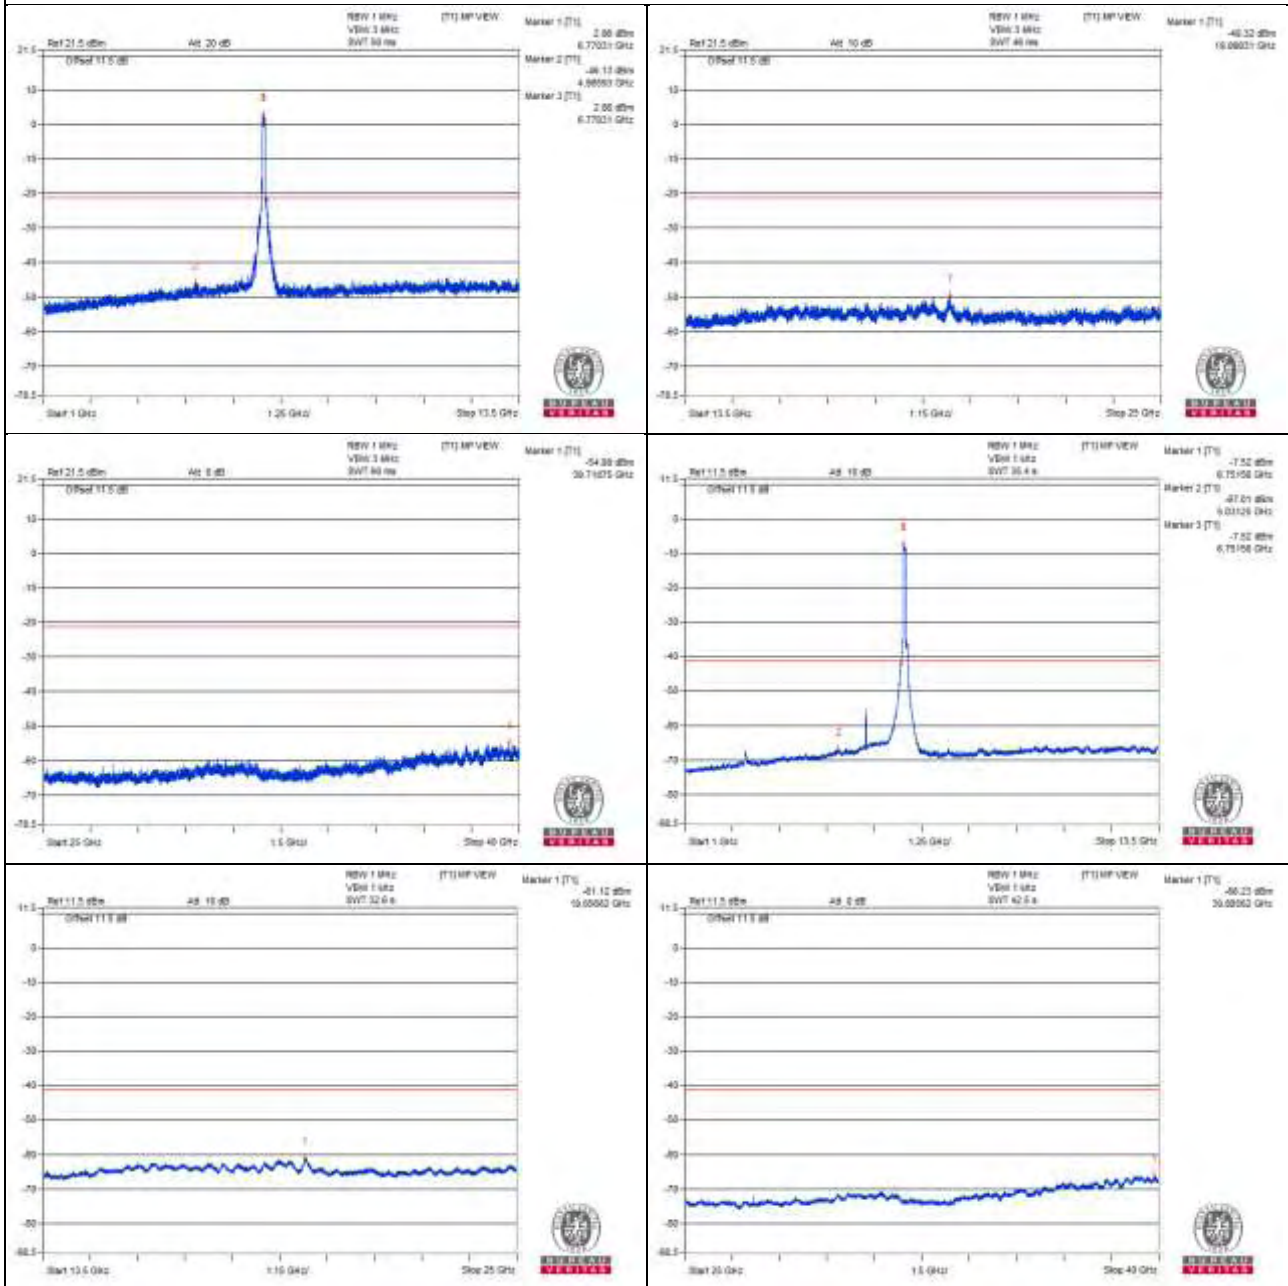

Chain 1

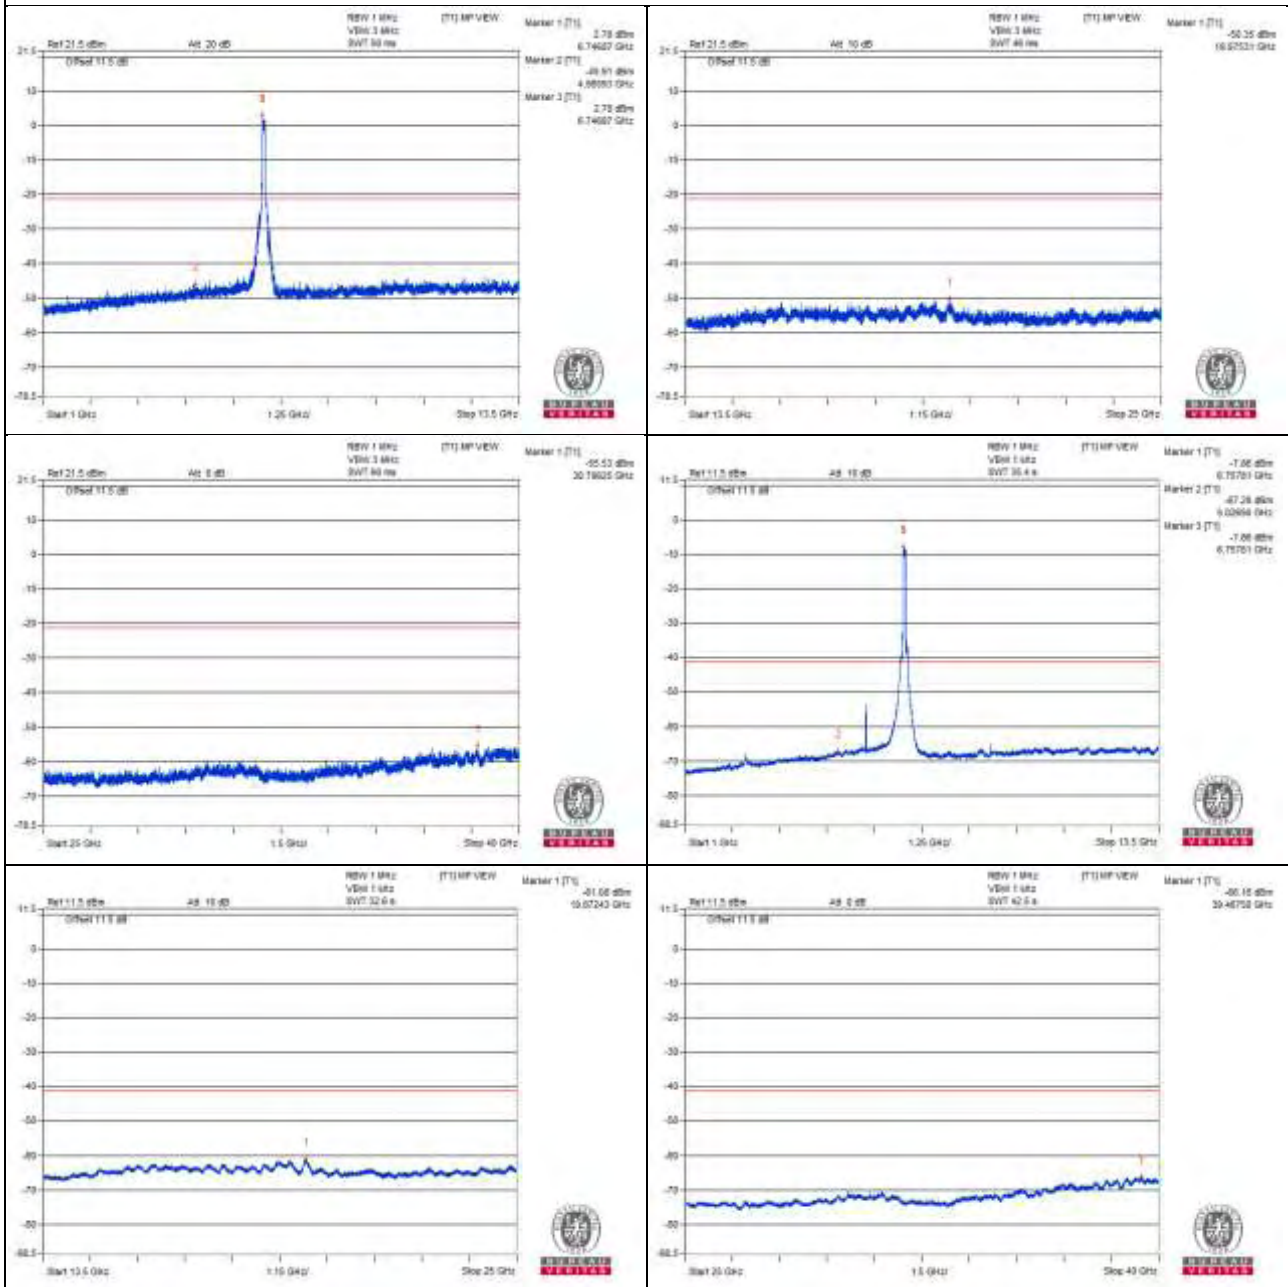

Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	7208.87 PK	60.31	88.2	-27.89	-45.88	-46.39	8.17	-34.95
2	7209.25 AV	47.05	68.2	-21.15	-59.42	-59.37	8.17	-48.21


Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8


d = measurement distance in 3 meters.

* The unwanted emission was verified and the test result was passed by radiated measurement.

Chain 0

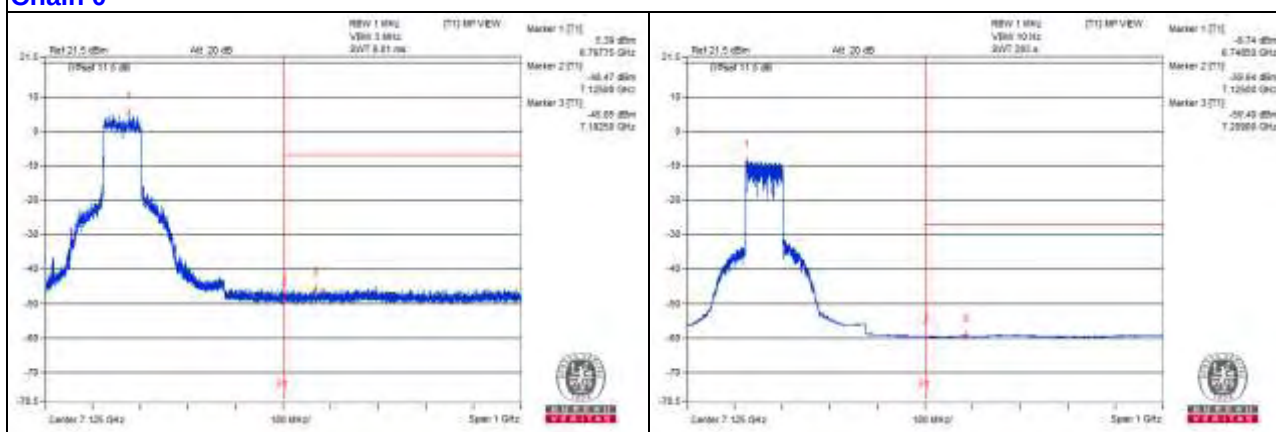

Chain 1

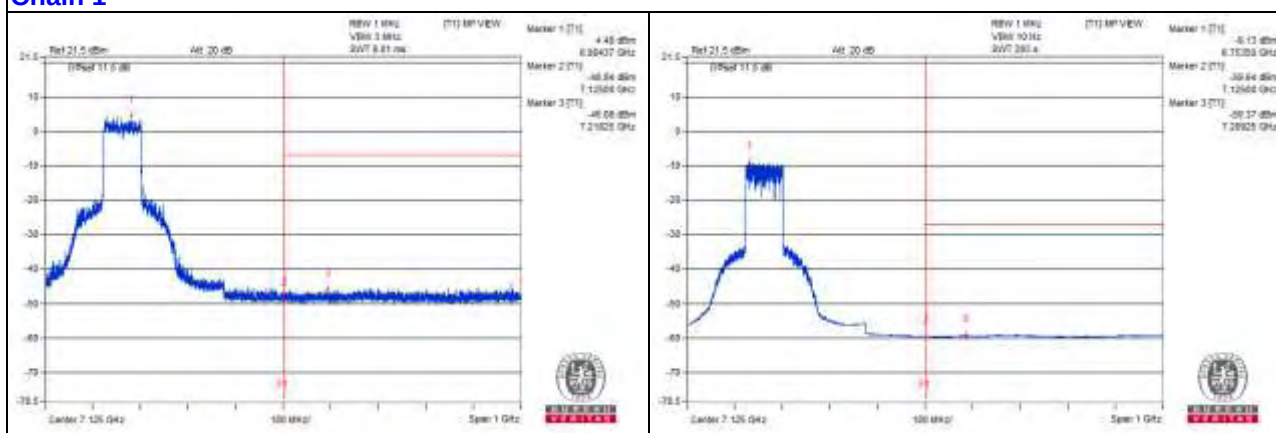

160MHz Preamble

RU1992

Channel 15

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	4000 PK	58.99	74	-15.01	-47.89	-47.06	8.17	-36.27
2	4015.62 AV	36.99	54	-17.01	-69.62	-69.29	8.17	-58.27
3	8032.81 PK	59.98	74	-14.02	-45.61	-47.51	8.17	-35.28
4	8032.81 AV	47.57	54	-6.43	-56.85	-62.79	8.17	-47.69
5	12031.25 PK	61.35	74	-12.65	-47.05	-43.74	8.17	-33.91
6	12039.06 AV	39.79	54	-14.21	-66.91	-66.41	8.17	-55.47
7	18085.62 PK	52.38	74	-21.62	-53.65	-54.52	8.17	-42.88
8	18088.5 AV	41.18	54	-12.82	-65.31	-65.21	8.17	-54.08

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

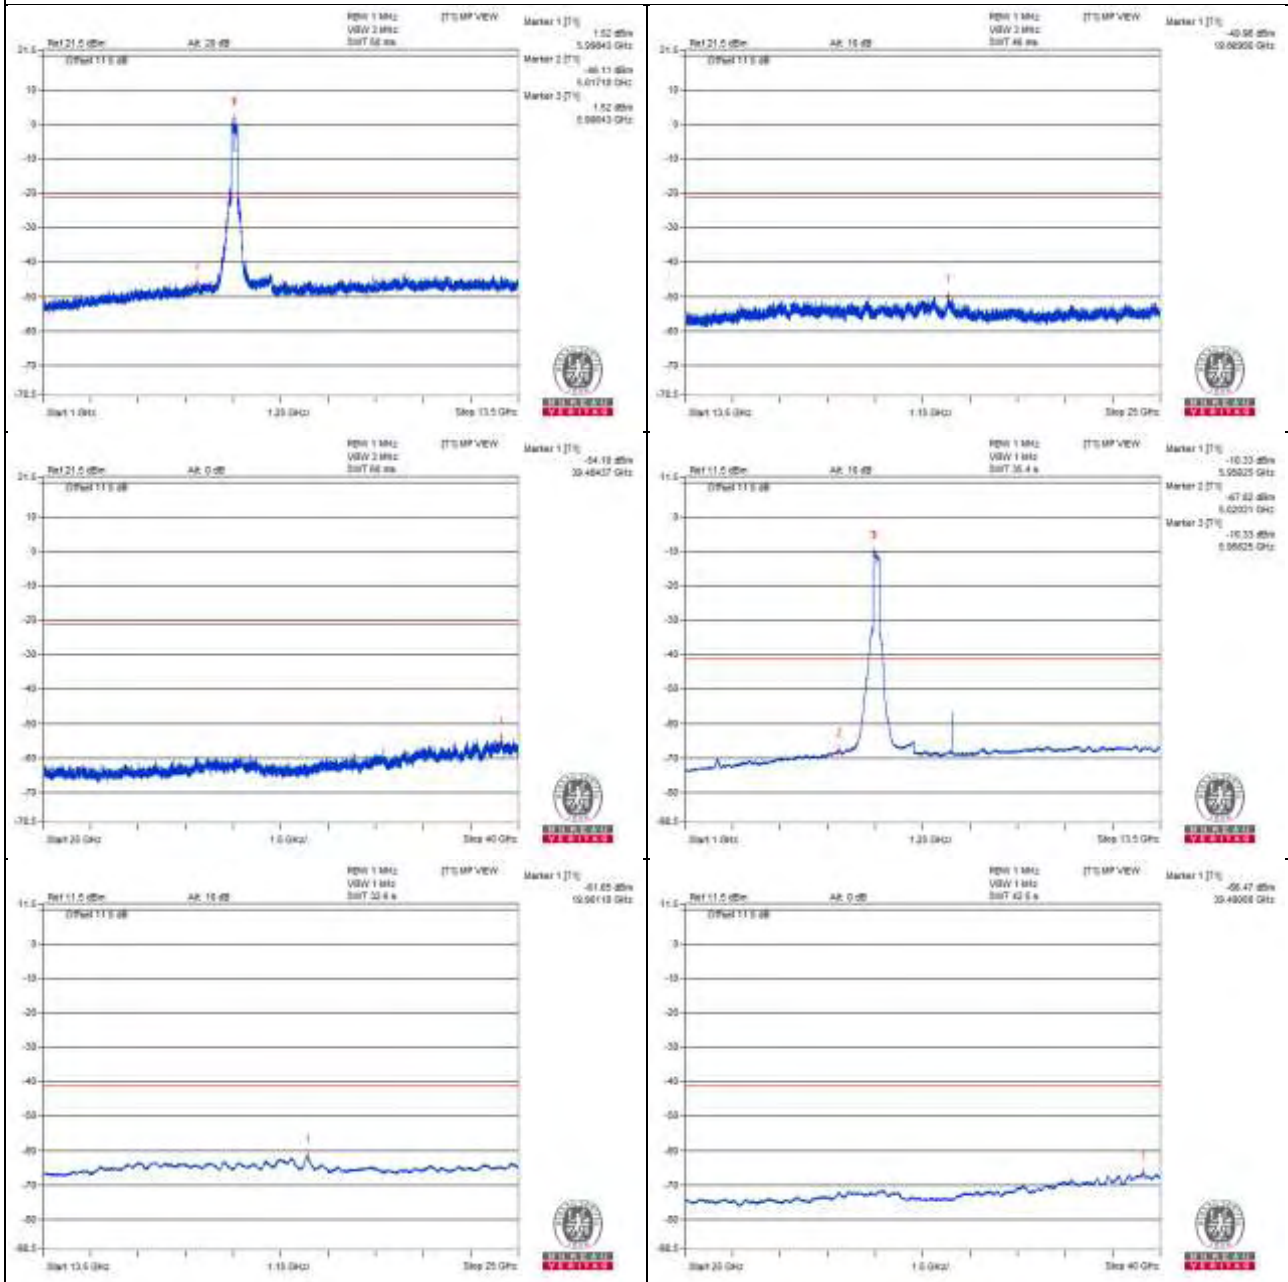

Chain 1

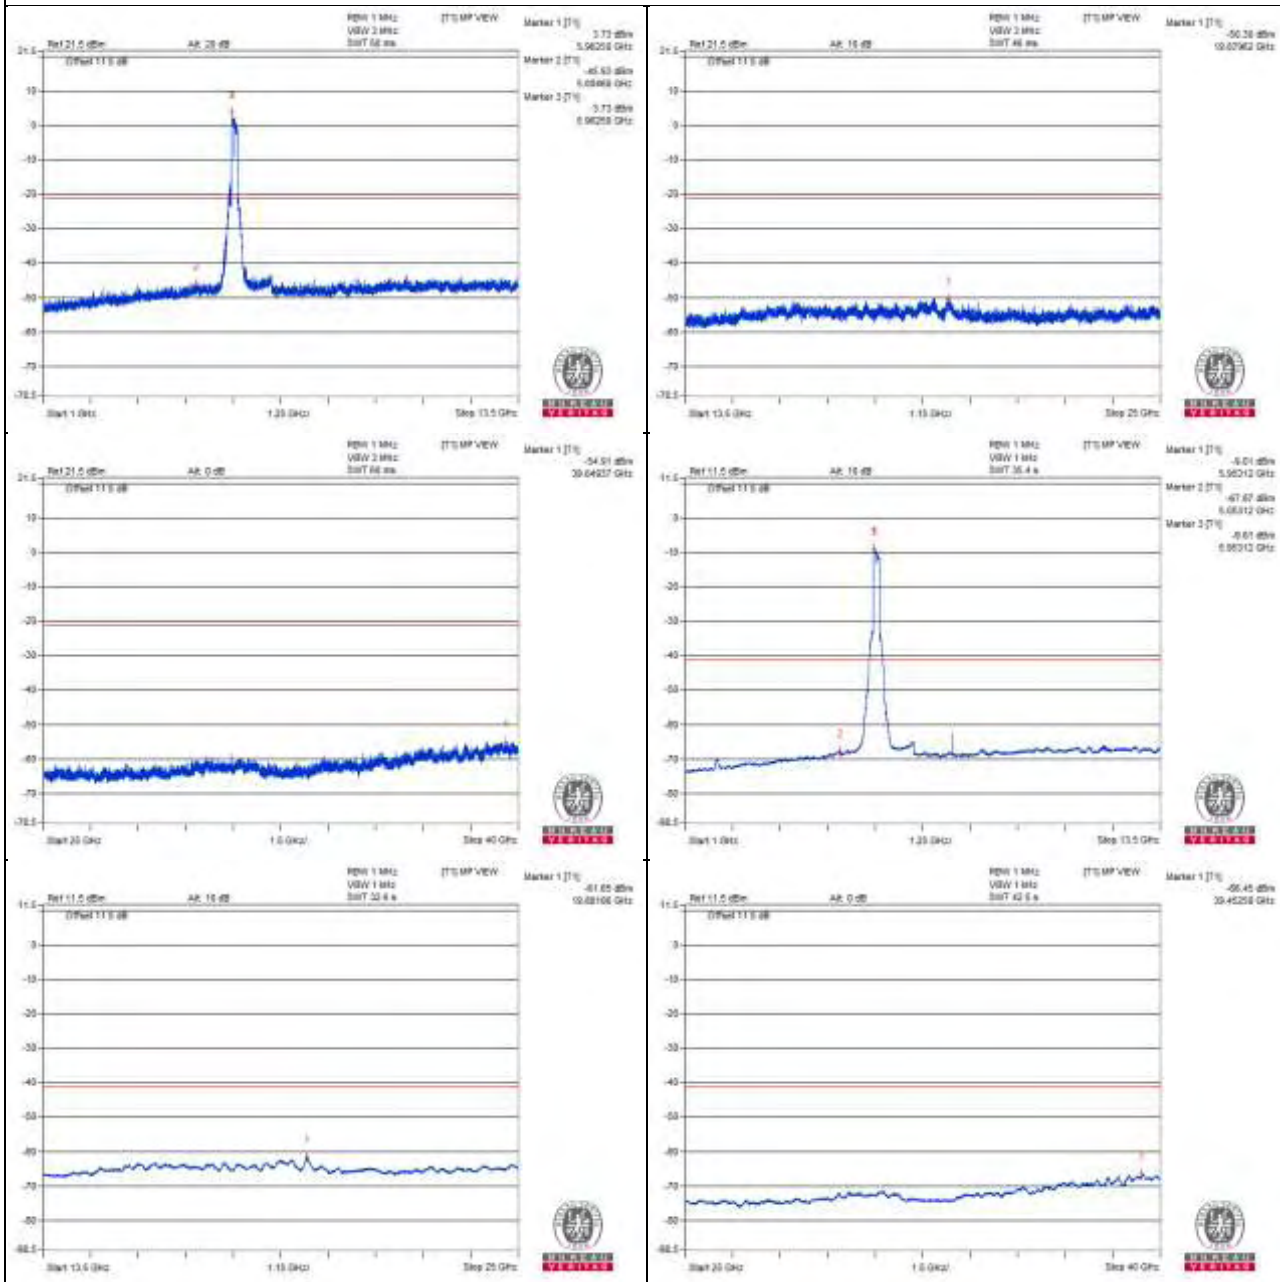

Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5893.05 PK	90.17	88.2	*1.97	-16.84	-15.74	8.15	-5.09
2	5923.47 AV	72.89	68.2	*4.69	-33.47	-33.59	8.15	-22.37


Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8


d = measurement distance in 3 meters.

* The unwanted emission was verified and the test result was passed by radiated measurement.
(Please refer APPENDIX B)

Chain 0

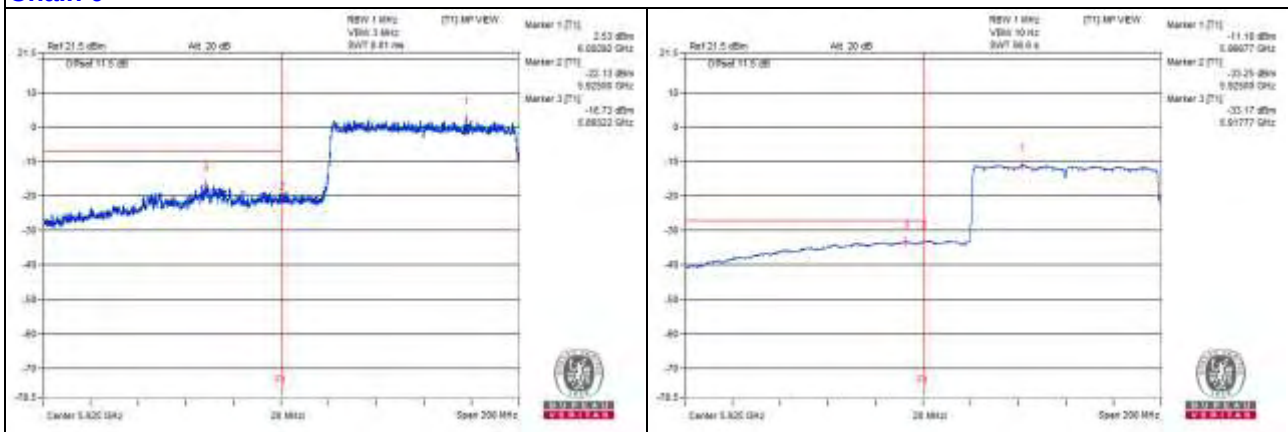

Chain 1

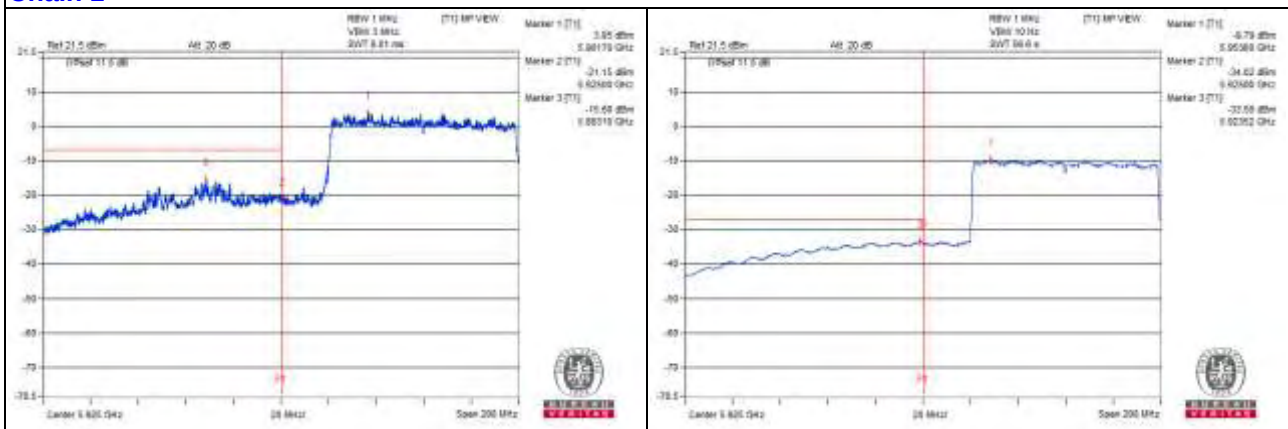

Channel 47

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	4126.56 PK	58.8	74	-15.2	-48.48	-46.93	8.17	-36.46
2	4123.43 AV	37.41	54	-16.59	-68.84	-69.22	8.17	-57.85
3	8246.87 PK	59.16	74	-14.84	-46.61	-48.07	8.17	-36.1
4	8246.87 AV	44.36	54	-9.64	-60.39	-64.88	8.17	-50.9
5	12353.12 PK	61.18	74	-12.82	-44.62	-46.01	8.17	-34.08
6	12351.56 AV	39.81	54	-14.19	-67.09	-66.21	8.17	-55.45
7	18574.37 PK	53.83	74	-20.17	-51.6	-53.92	8.17	-41.43
8	18561.43 AV	42.42	54	-11.58	-64	-64.05	8.17	-52.84

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

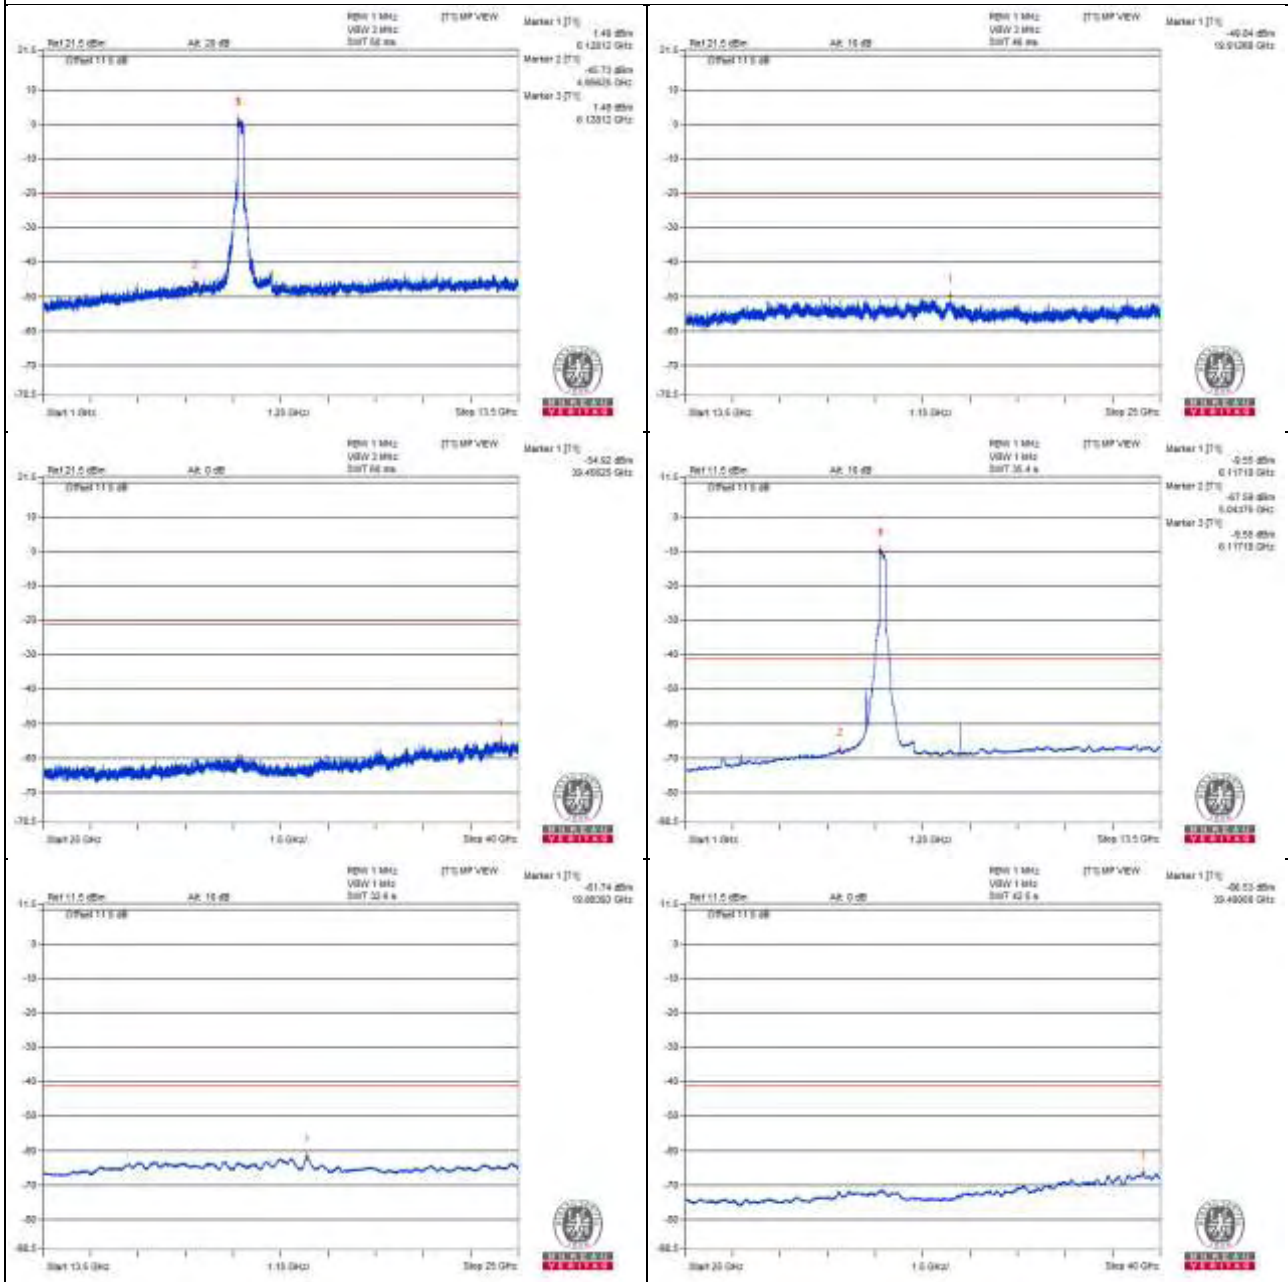

Chain 1

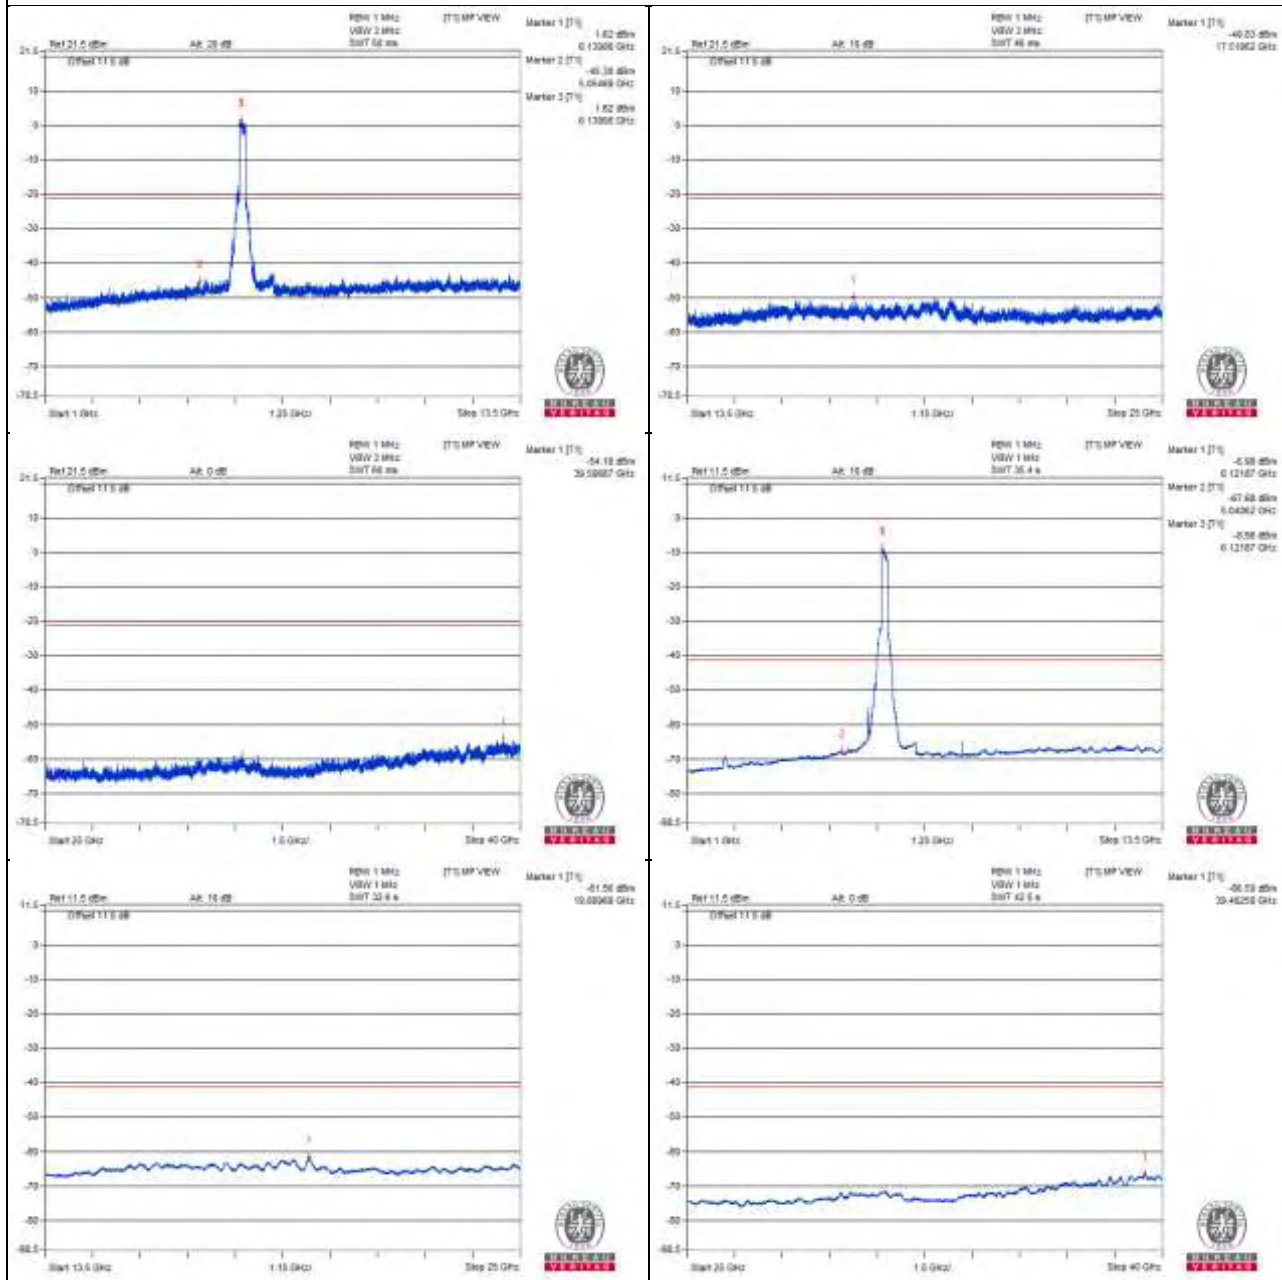

Channel 79

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	4239.06 PK	57.85	74	-16.15	-48.28	-48.93	8.17	-37.41
2	4210.93 AV	36.89	54	-17.11	-69.5	-69.61	8.17	-58.37
3	8445.31 PK	59.89	74	-14.11	-45.95	-47.25	8.17	-35.37
4	8459.37 AV	47.32	54	-6.68	-56.48	-67.01	8.17	-47.94
5	12692.18 PK	60.88	74	-13.12	-46.74	-44.64	8.17	-34.38
6	12681.25 AV	39.44	54	-14.56	-67.14	-66.86	8.17	-55.82
7	19022.87 PK	53.2	74	-20.8	-54.65	-52.17	8.17	-42.06
8	19017.12 AV	41.8	54	-12.2	-64.68	-64.61	8.17	-53.46

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

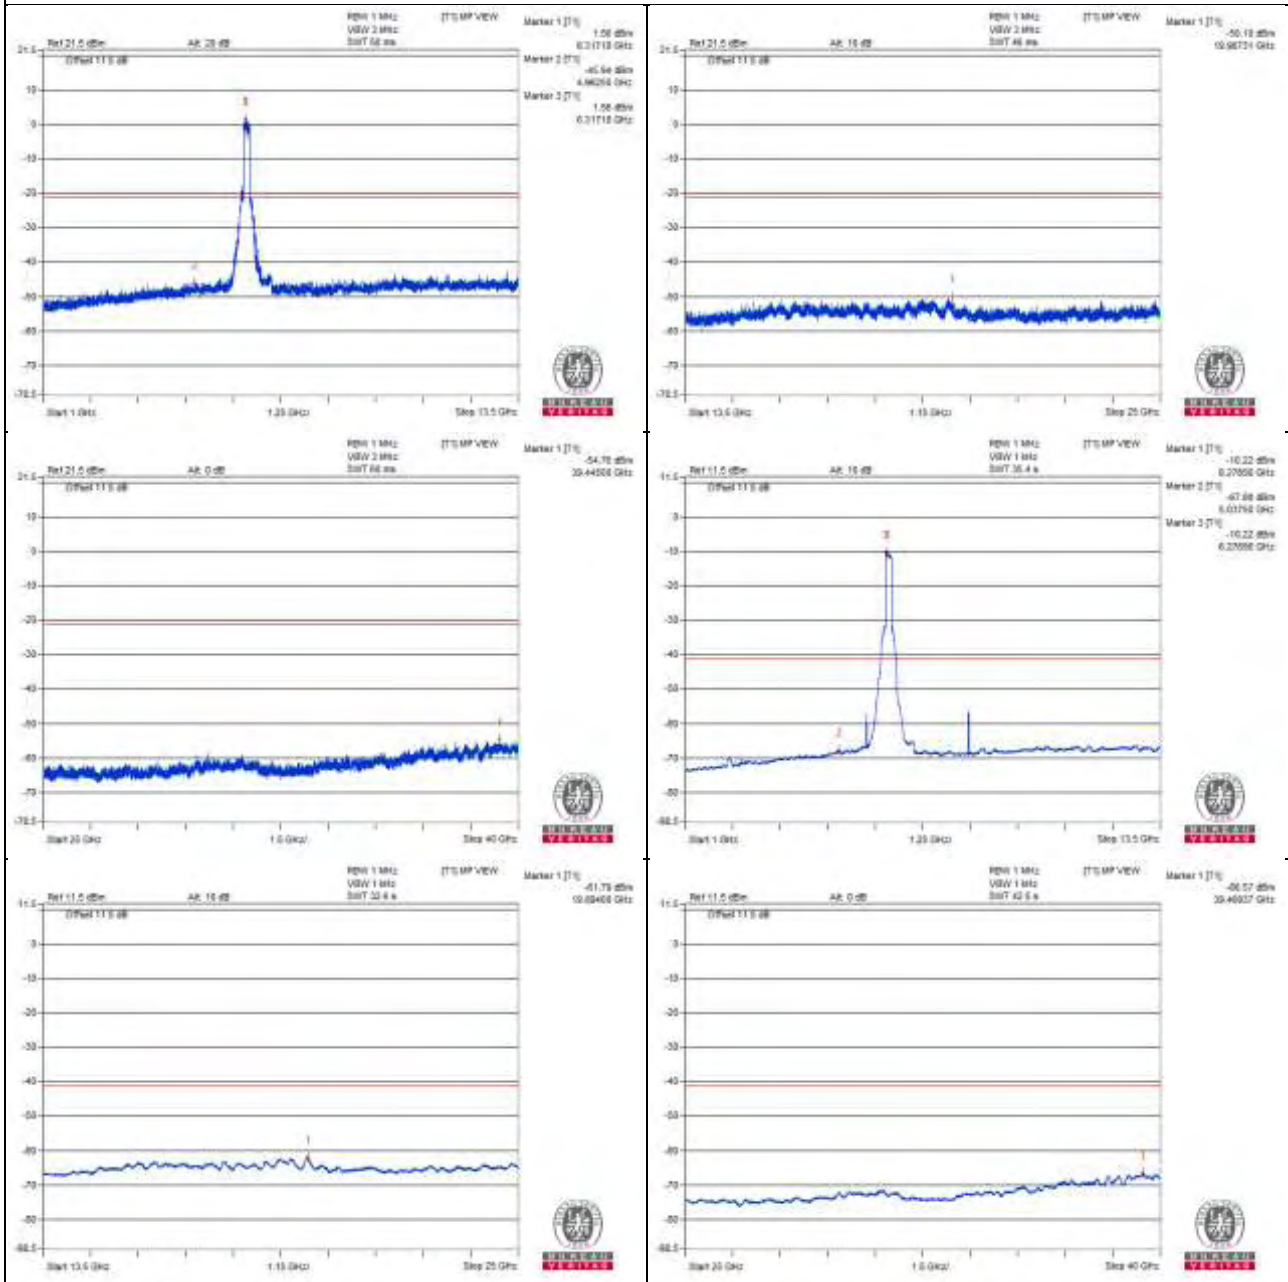

Chain 1

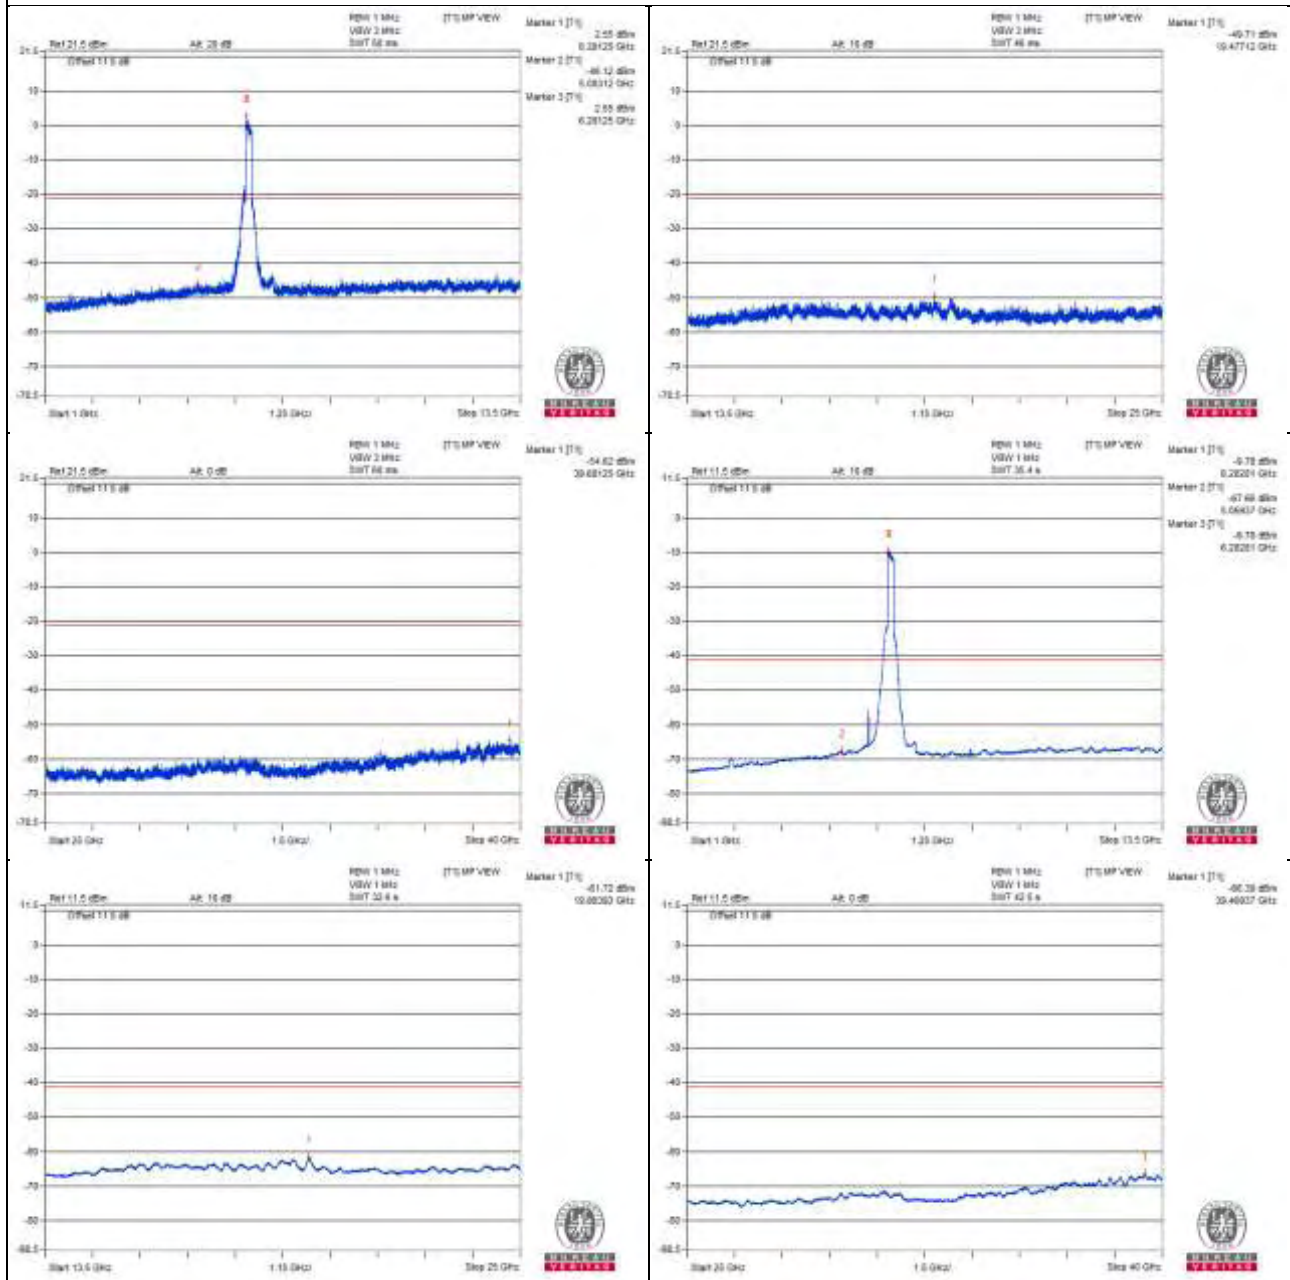

Channel 143

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	4453.12 PK	58.77	68.2	-9.43	-49.39	-46.44	8.17	-36.49
2	8870.31 PK	60.42	68.2	-7.78	-45.08	-47.23	8.17	-34.84
3	13315.62 PK	60.43	74	-13.57	-46.28	-45.76	8.17	-34.83
4	13310.93 AV	39.15	54	-14.85	-67.58	-67.02	8.17	-56.11
5	20010.43 PK	53.47	74	-20.53	-53.26	-52.7	8.17	-41.79
6	19975.93 AV	42.58	54	-11.42	-63.68	-64.05	8.17	-52.68

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

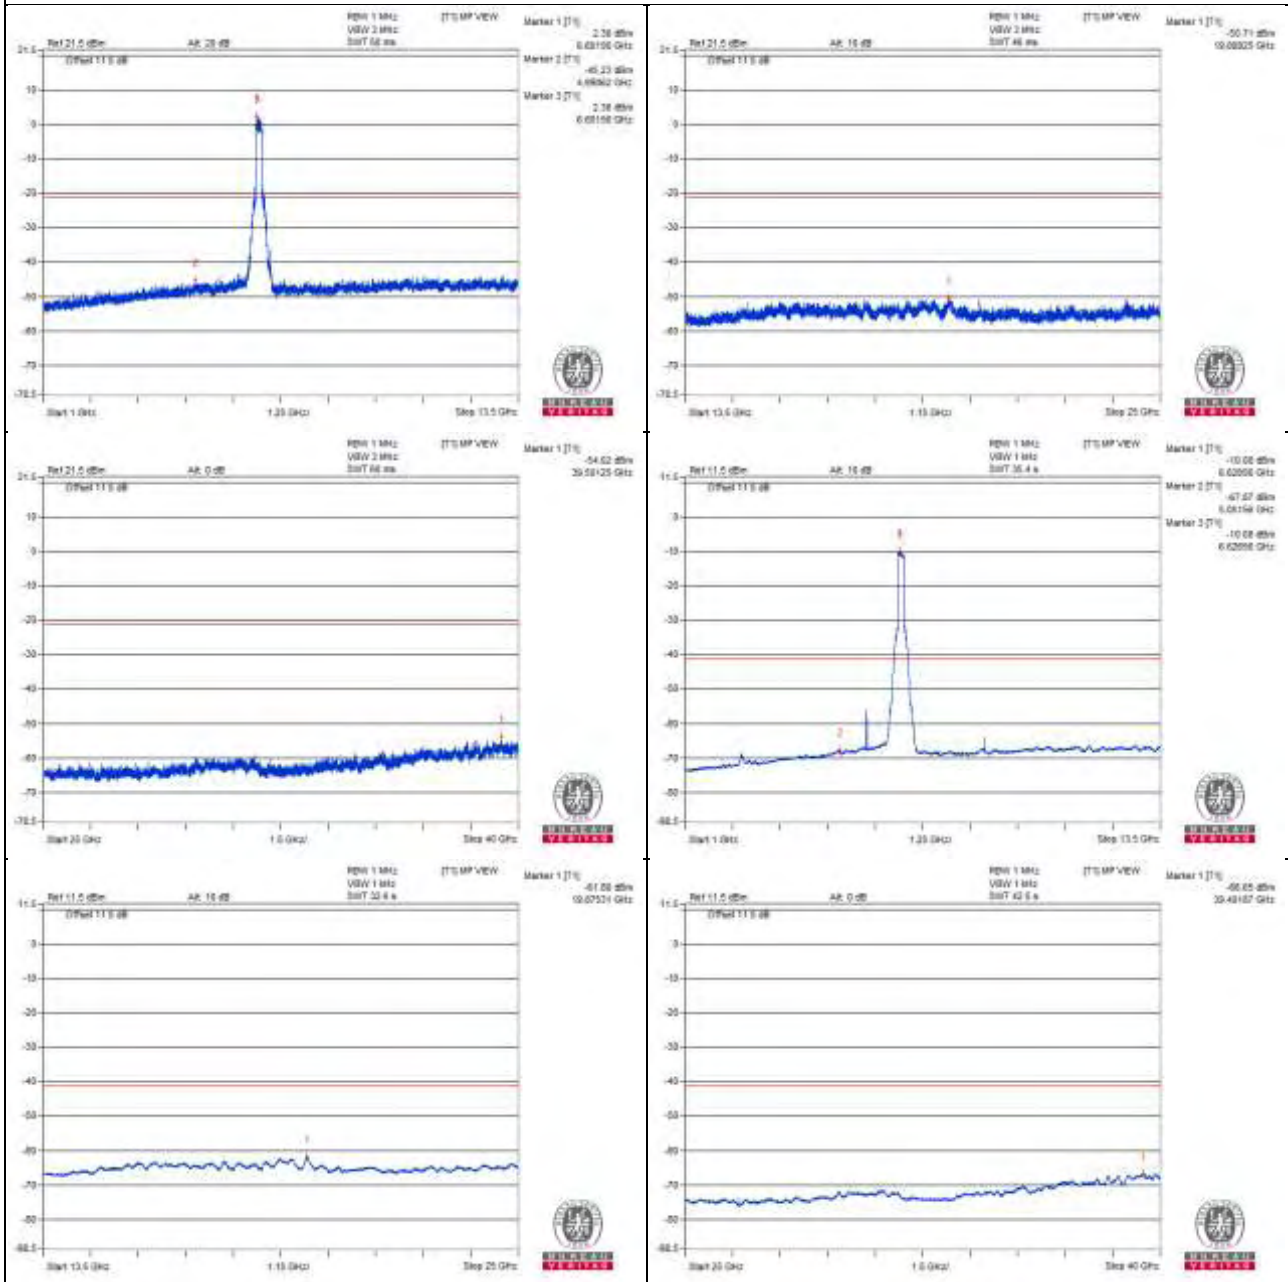

Chain 1

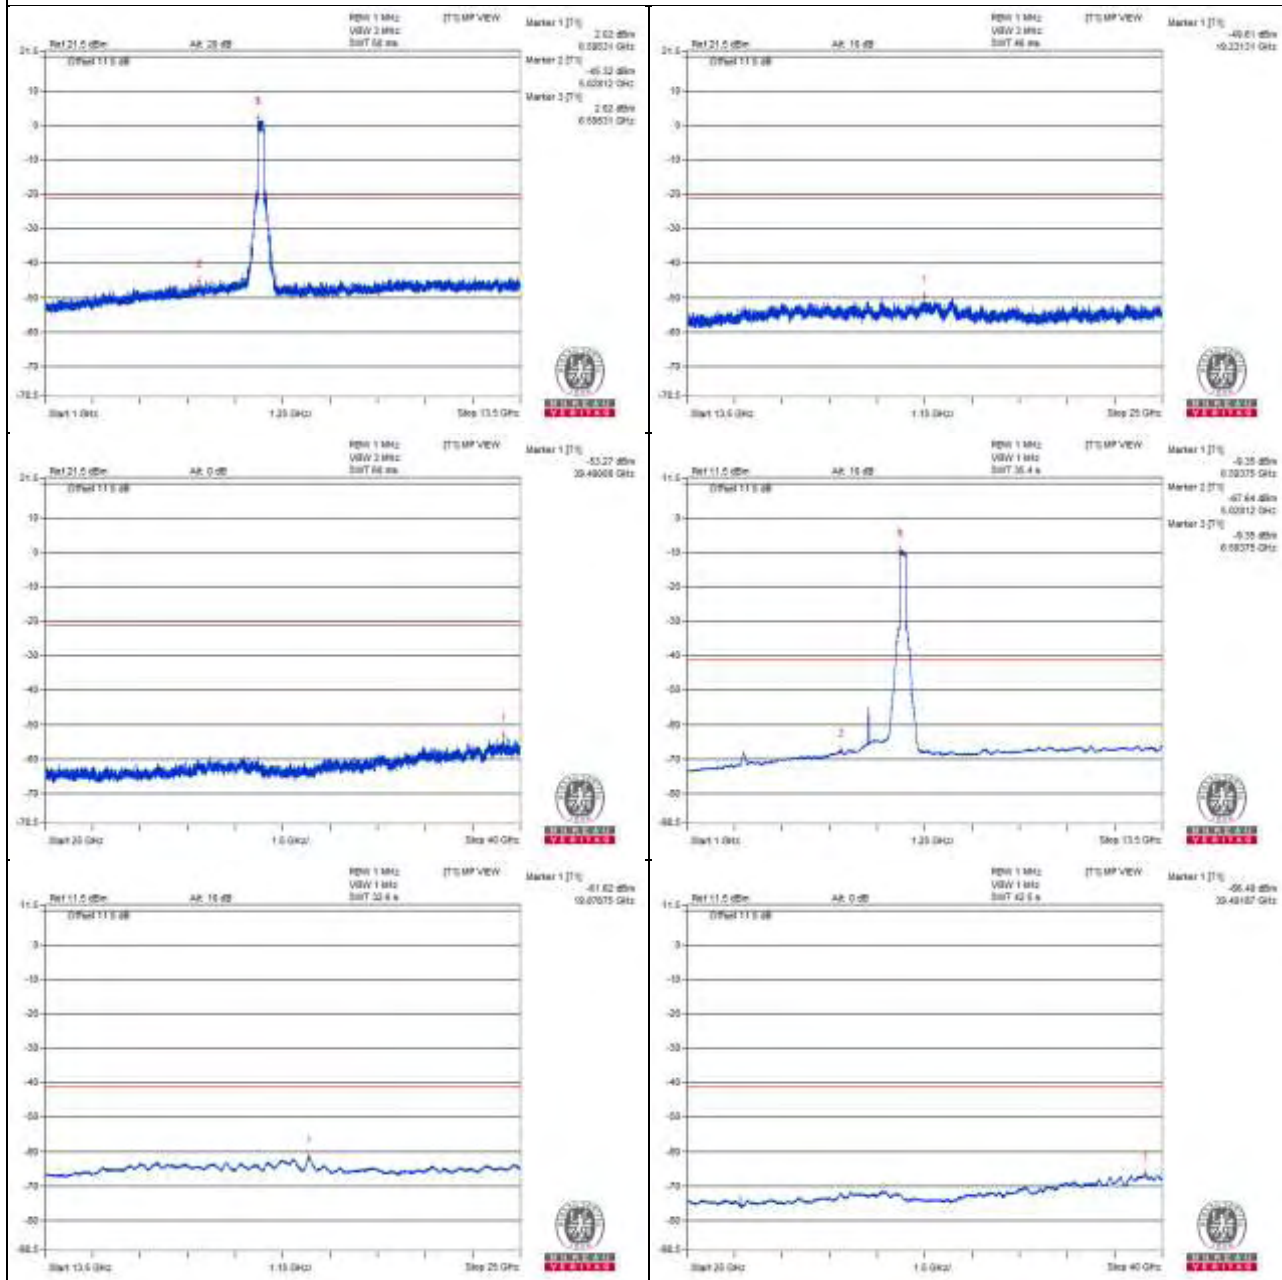

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	7150.72 PK	60.49	88.2	-27.71	-44.42	-48.34	8.17	-34.77
2	7209.7 AV	47.02	68.2	-21.18	-59.38	-59.46	8.17	-48.24

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

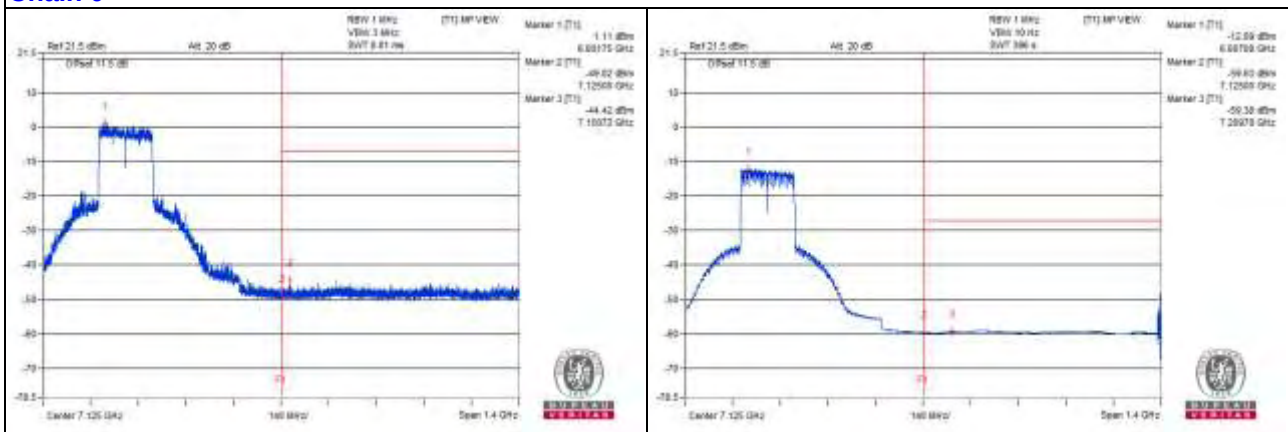

Chain 1

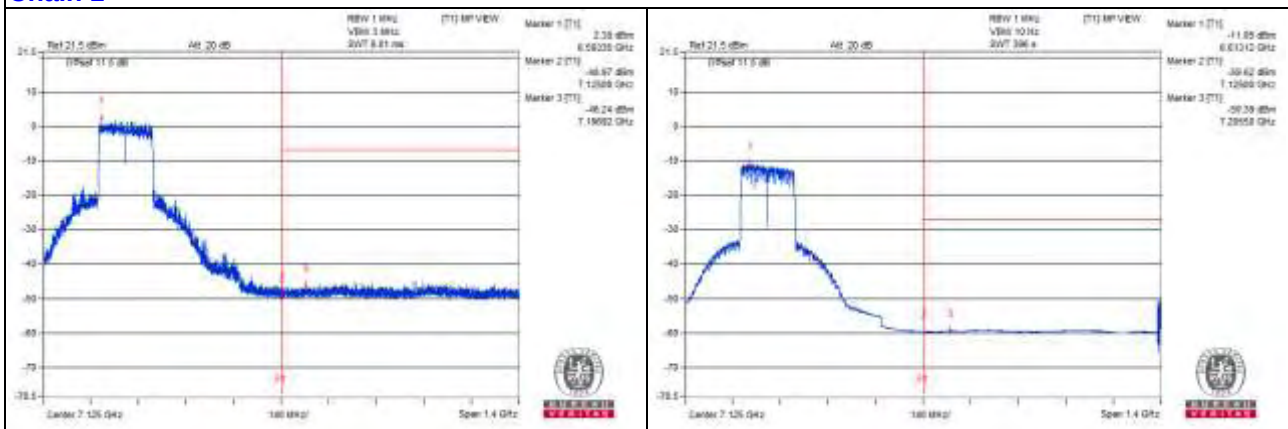

Below 1GHz Data (For Standard AP Client):

802.11a – Channel 117

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain 0	Chain 1		
1	799.45	32.2	46	-13.8	-74.57	-73.93	8.17	-63.06

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

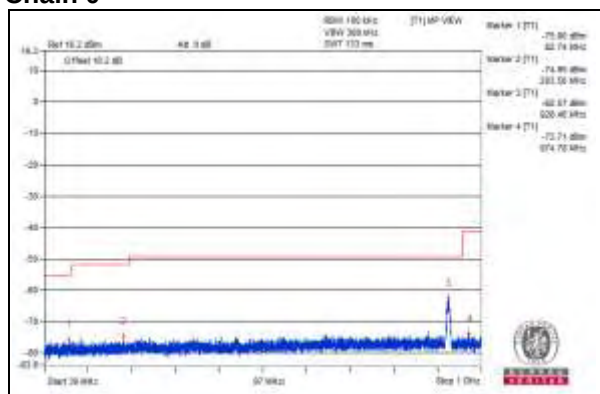

Chain 1

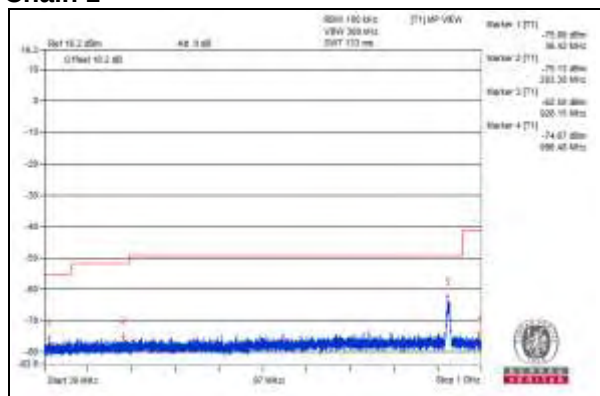

Above 1GHz Data (For Indoor AP Client):

802.11a - Channel 2

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	11875 PK	60.82	74	-13.18	-44.82	-46.6	8.17	-34.44
2	11878.12 AV	38.91	54	-15.09	-67.49	-67.57	8.17	-56.35
3	17813.93 PK	53.67	74	-20.33	-54.27	-51.65	8.17	-41.59
4	17813.93 AV	42.37	54	-11.63	-64.06	-64.09	8.17	-52.89

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

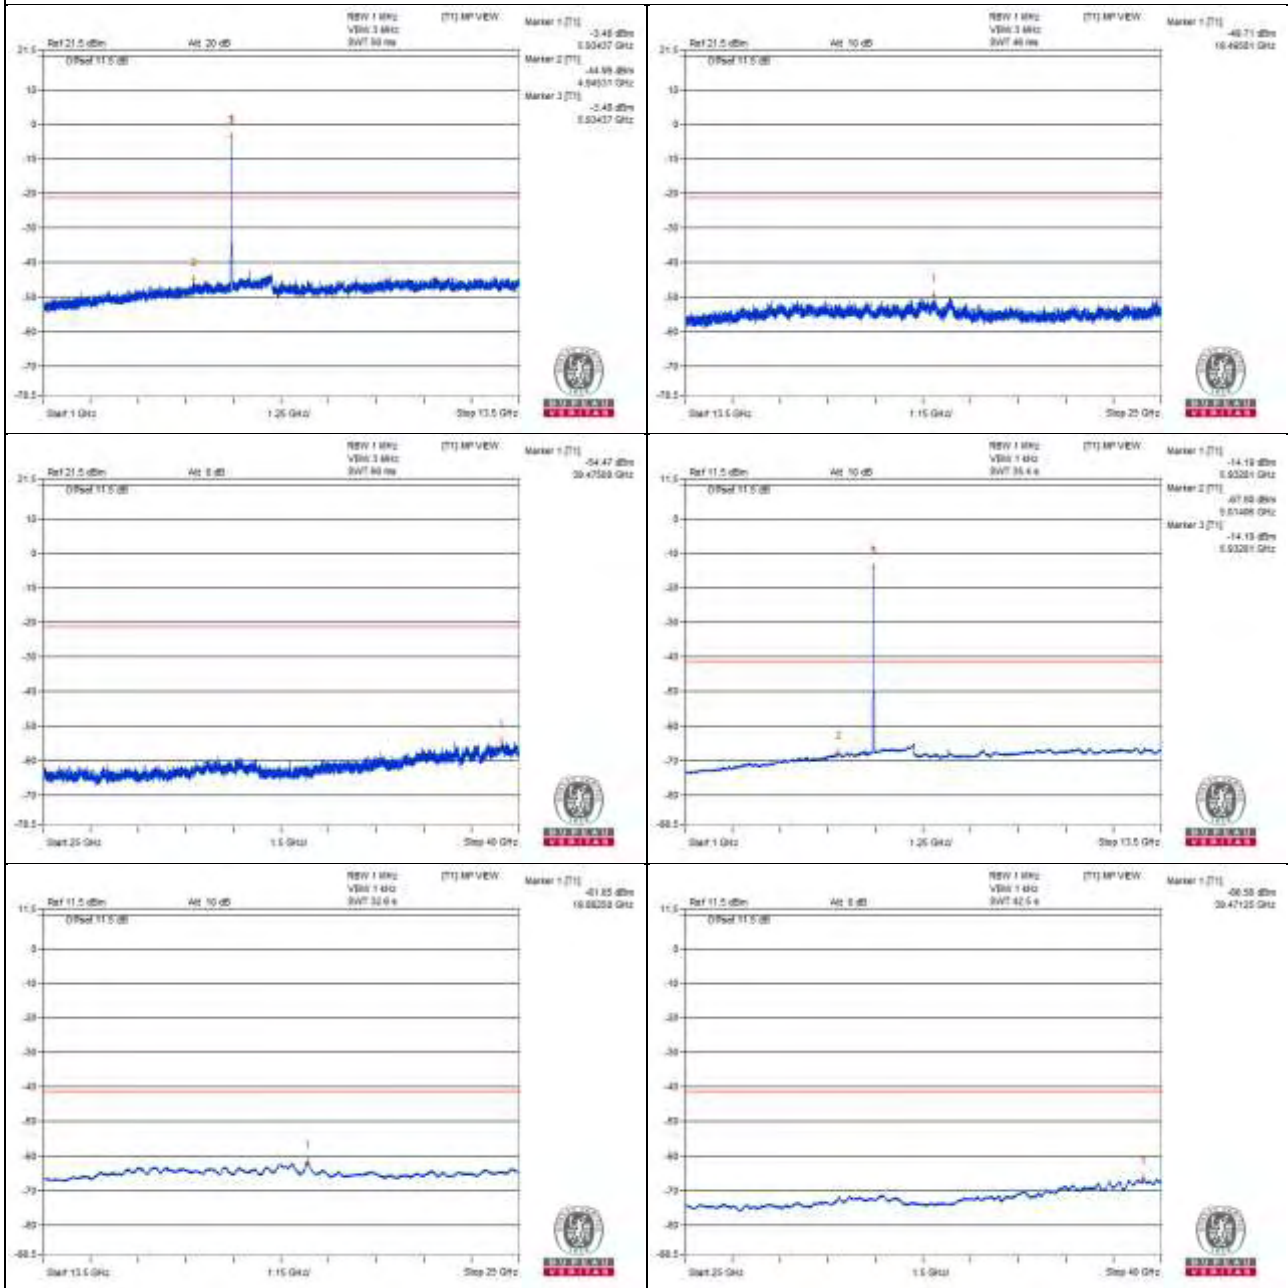

Chain 1

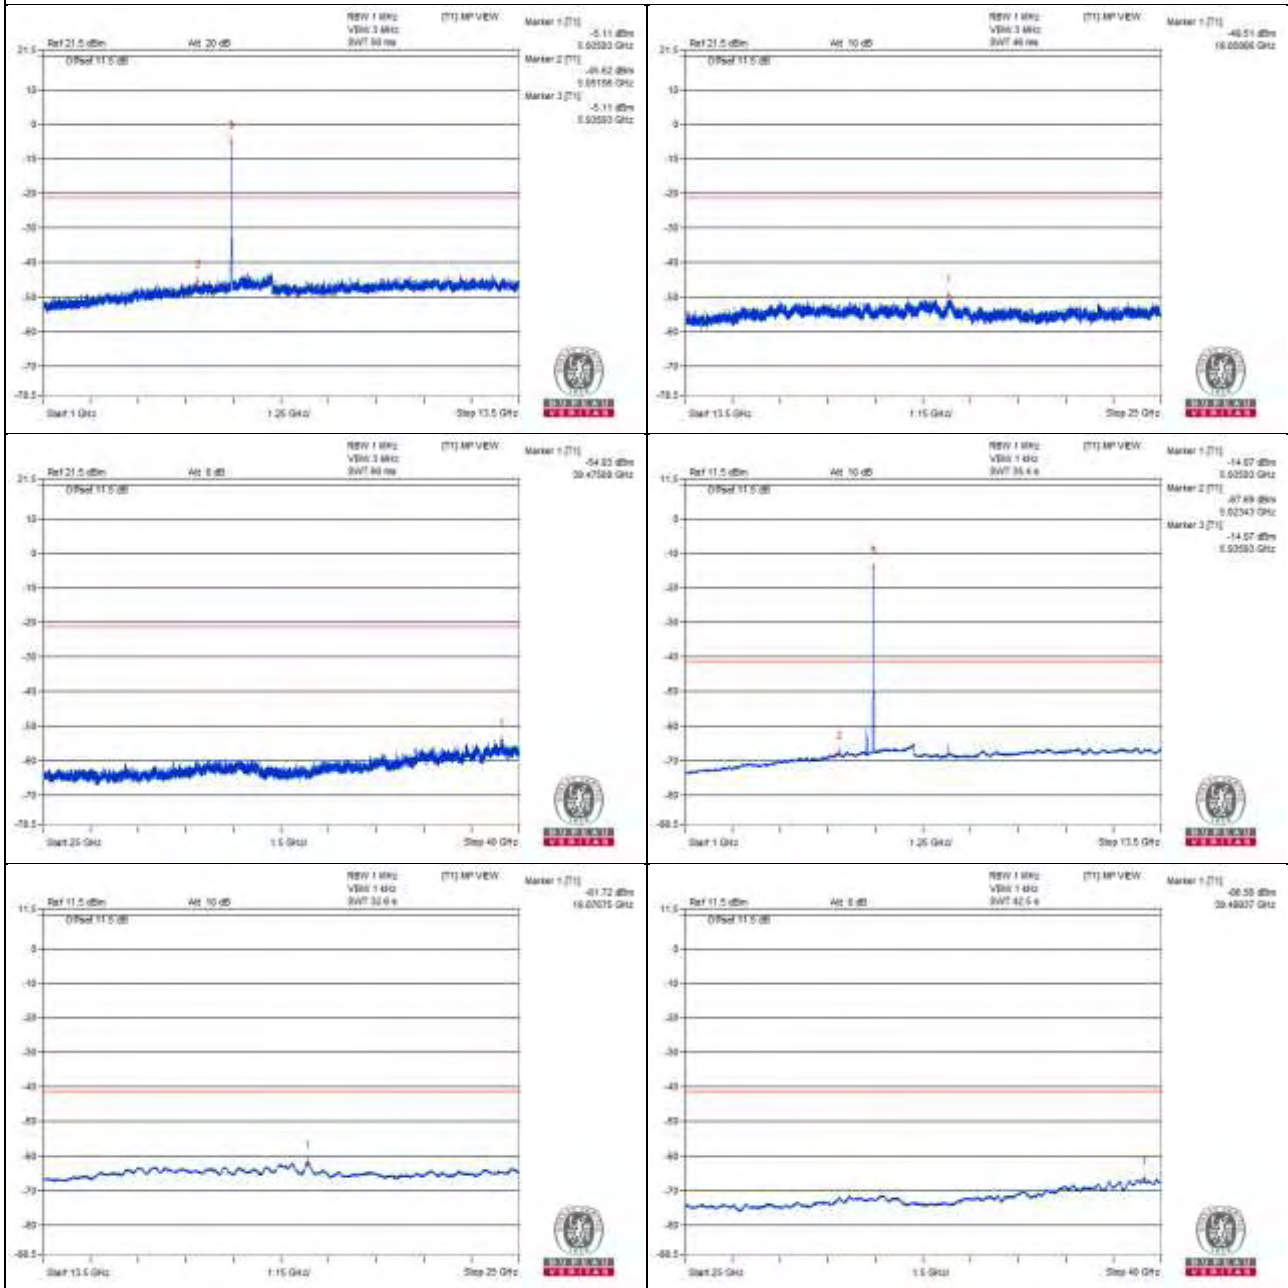

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5924.92 PK	79.11	88.2	-9.09	-27.04	-27.6	8.15	-16.15
2	5925 AV	60.42	68.2	-7.78	-45.87	-46.14	8.15	-34.84

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

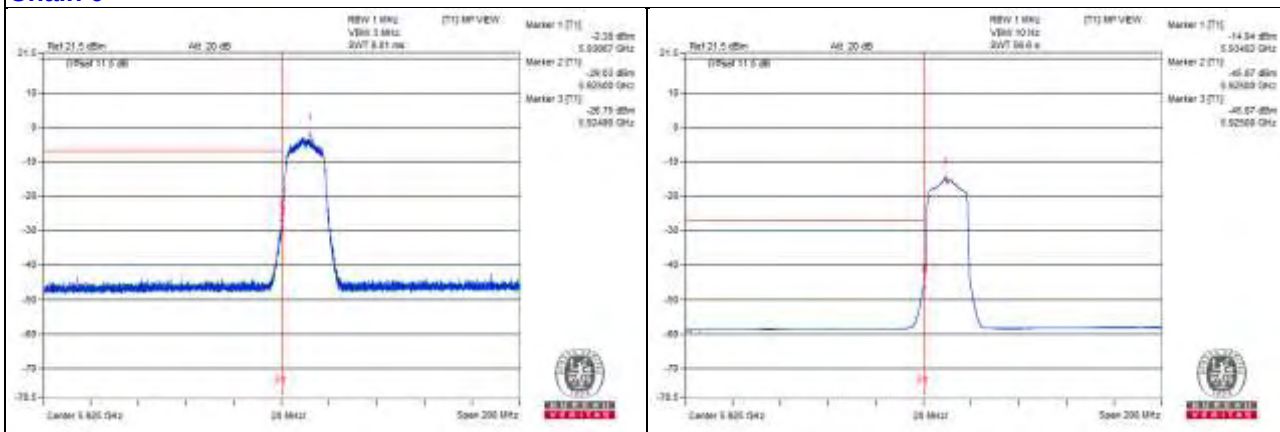

Chain 1

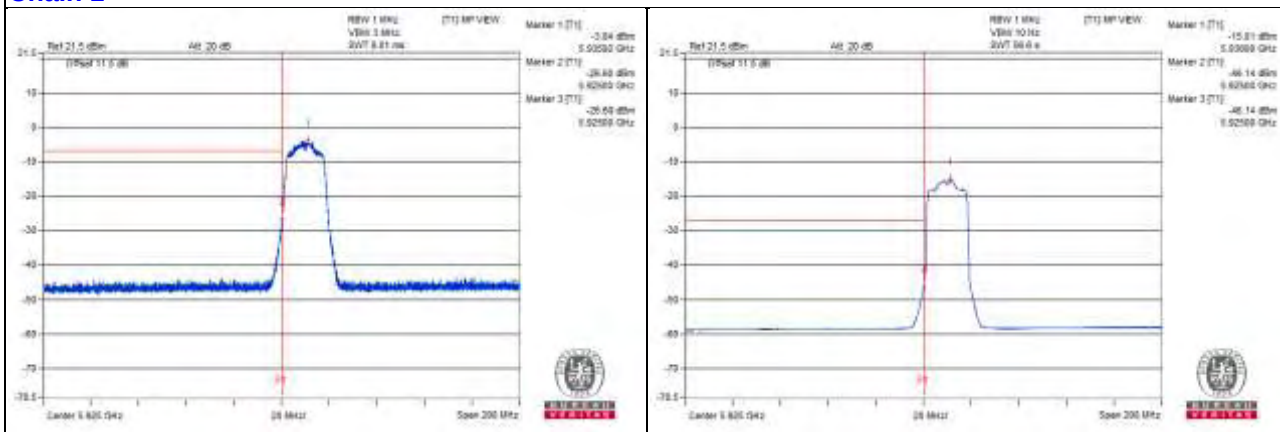

802.11a - Channel 1

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	11912.5 PK	60.08	74	-13.92	-46.35	-46.37	8.17	-35.18
2	11917.18 AV	39.11	54	-14.89	-67.08	-67.59	8.17	-56.15
3	17861.37 PK	53.95	74	-20.05	-52.51	-52.48	8.17	-41.31
4	17857.06 AV	43.13	54	-10.87	-63.34	-63.28	8.17	-52.13

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

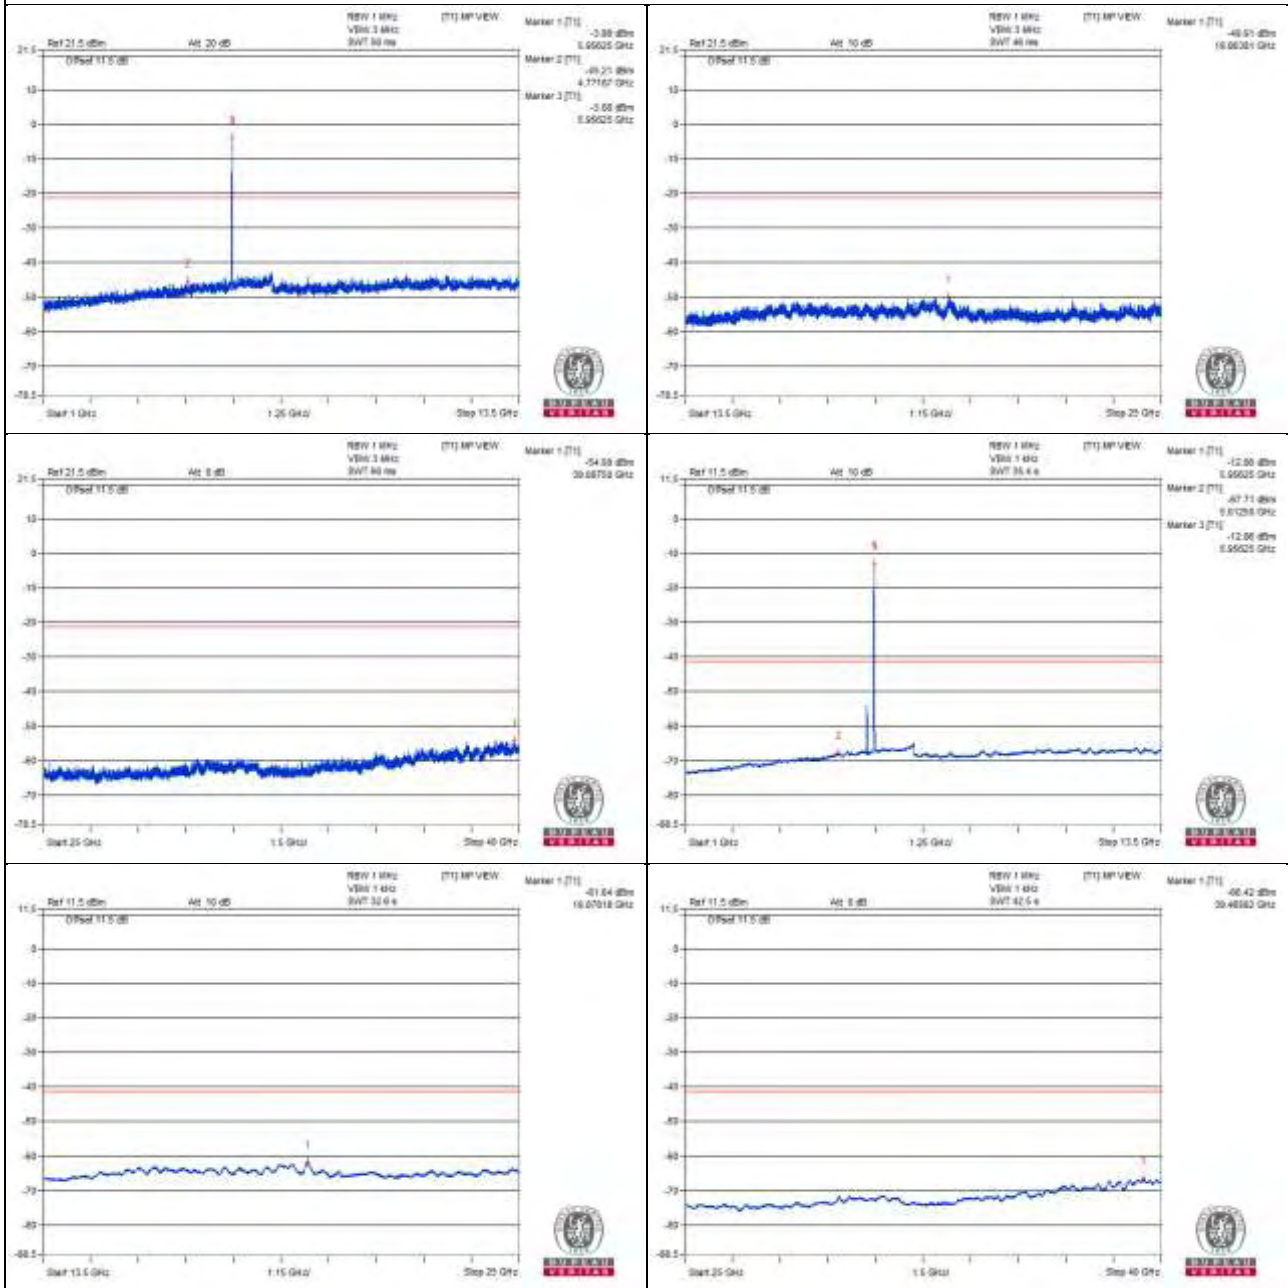

Chain 1

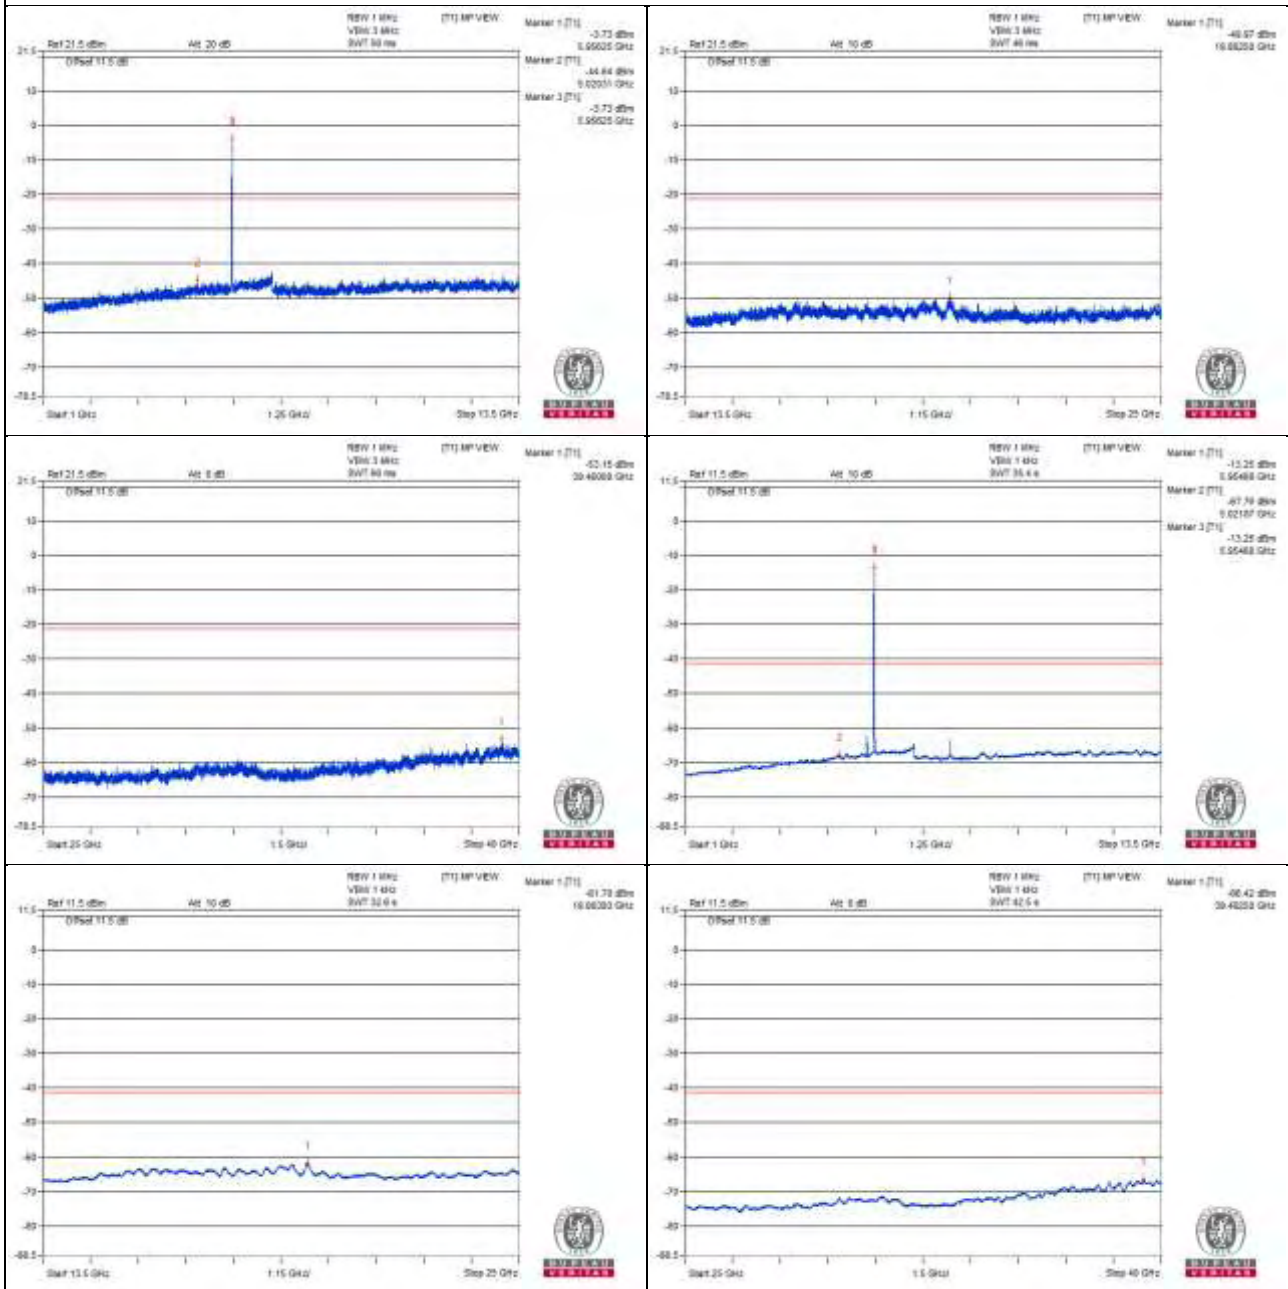

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5904.52 PK	61.68	88.2	-26.52	-44.1	-45.49	8.15	-33.58
2	5900.92 AV	48.04	68.2	-20.16	-58.33	-58.44	8.15	-47.22

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

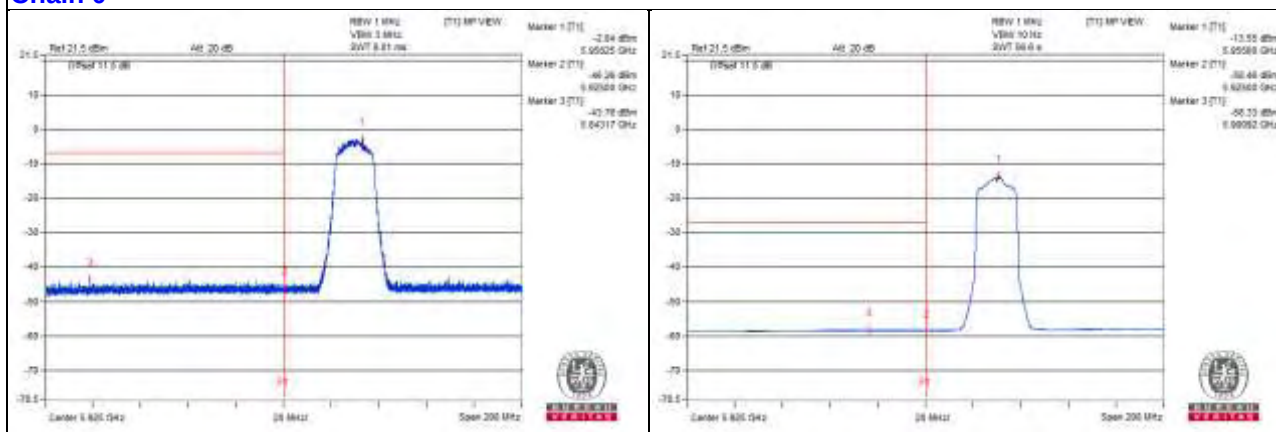

Chain 1

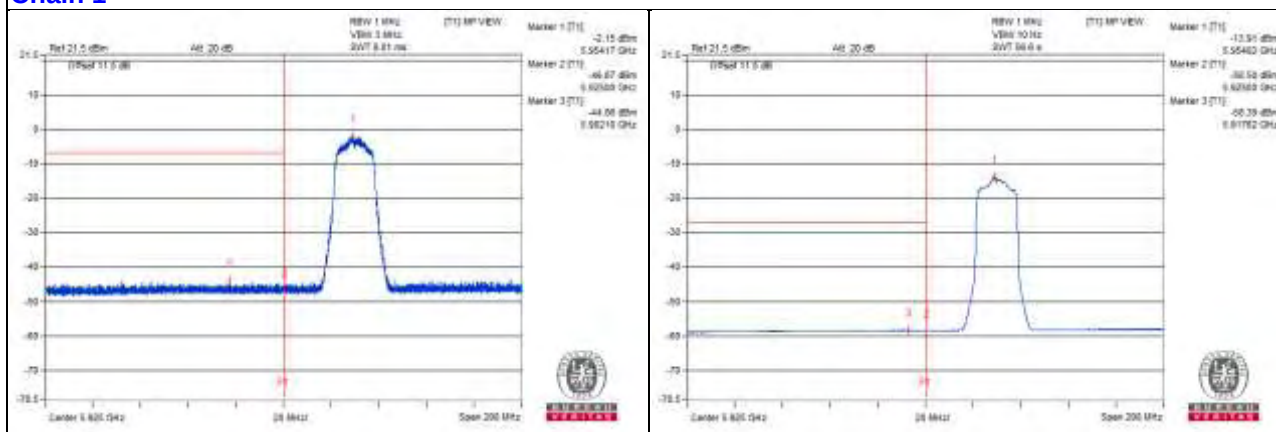

802.11a - Channel 45

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	12348.43 PK	61.5	74	-12.5	-43.93	-46.27	8.17	-33.76
2	12343.75 AV	39.36	54	-14.64	-67.26	-66.91	8.17	-55.9
3	18531.25 PK	52.47	74	-21.53	-55	-53.14	8.17	-42.79
4	18534.12 AV	42.23	54	-11.77	-64.26	-64.16	8.17	-53.03

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

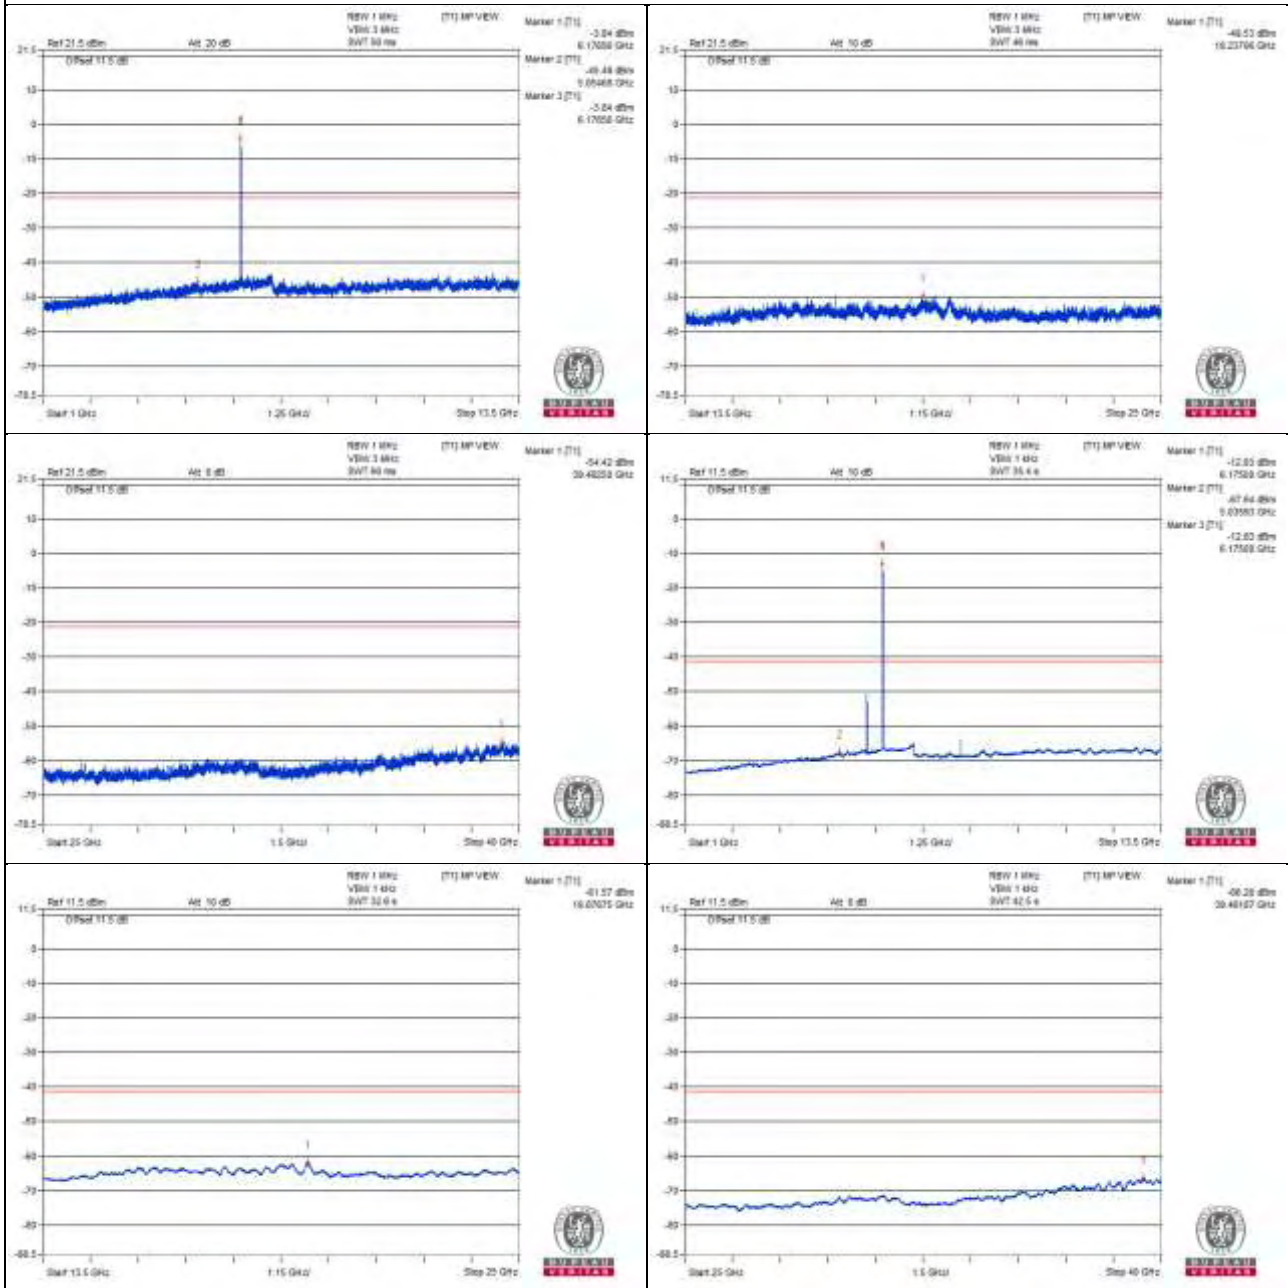

Chain 1

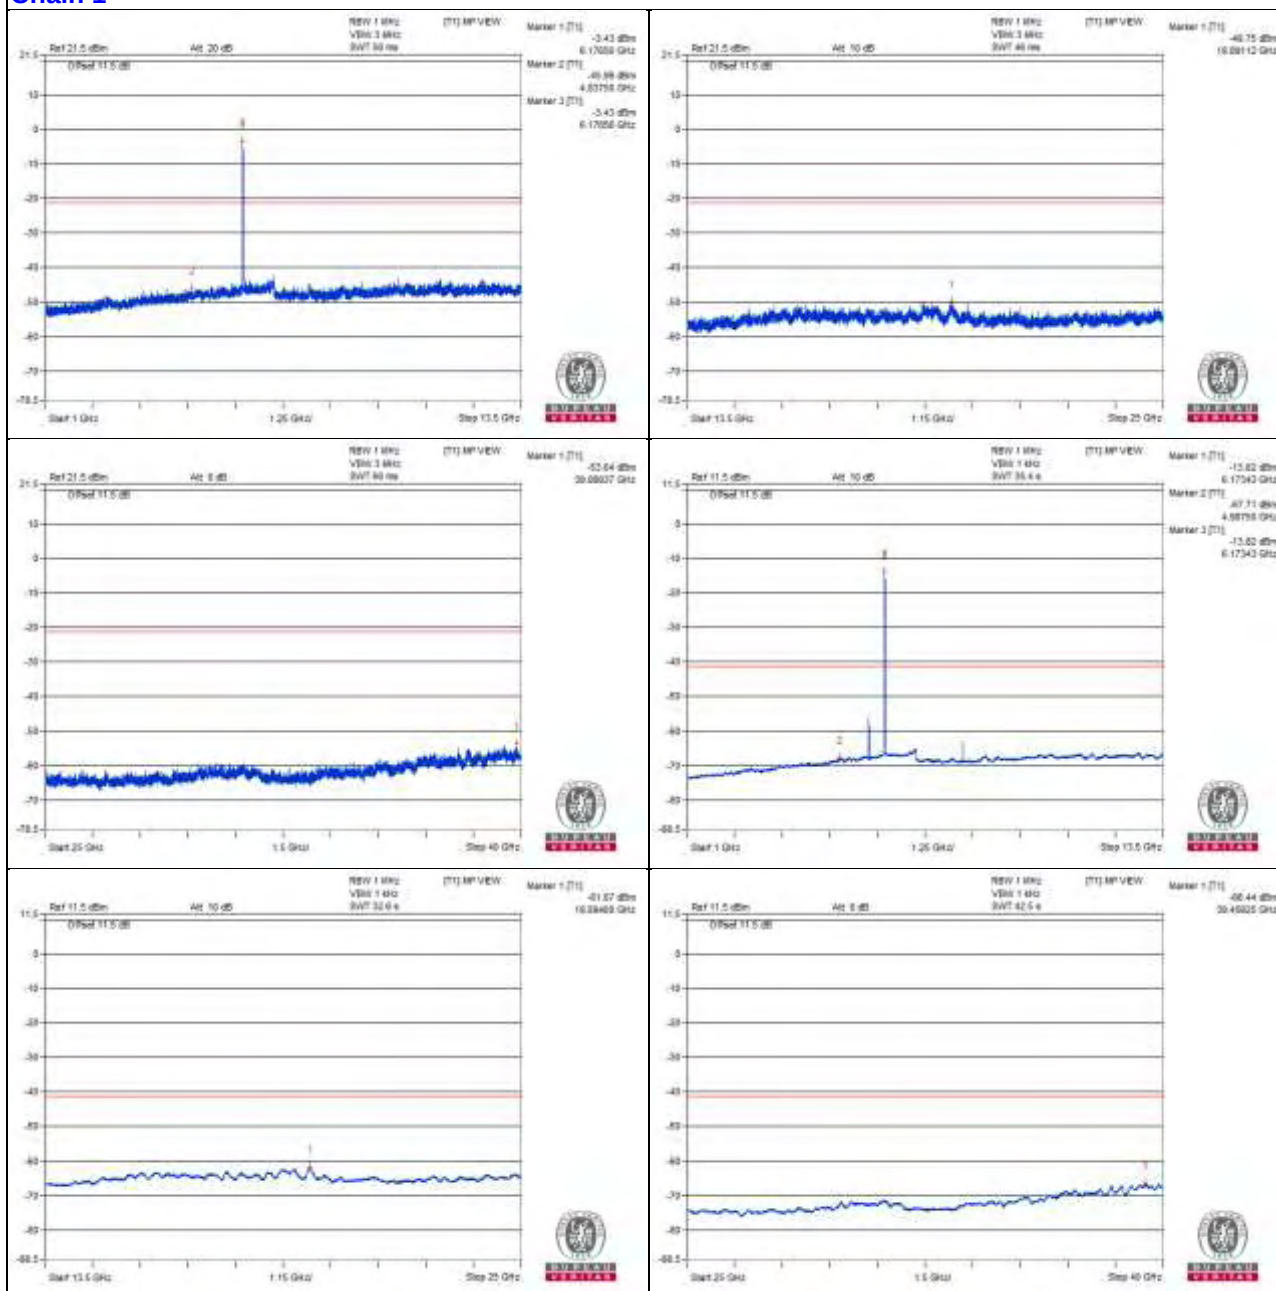

802.11a - Channel 93

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	12834.37 PK	60.77	88.2	-27.43	-44.9	-46.6	8.17	-34.49
2	12831.25 AV	39.91	68.2	-28.29	-66.47	-66.6	8.17	-55.35
3	19247.12 PK	54.67	74	-19.33	-51.49	-52.08	8.17	-40.59
4	19244.25 AV	44.01	54	-9.99	-62.42	-62.44	8.17	-51.25

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

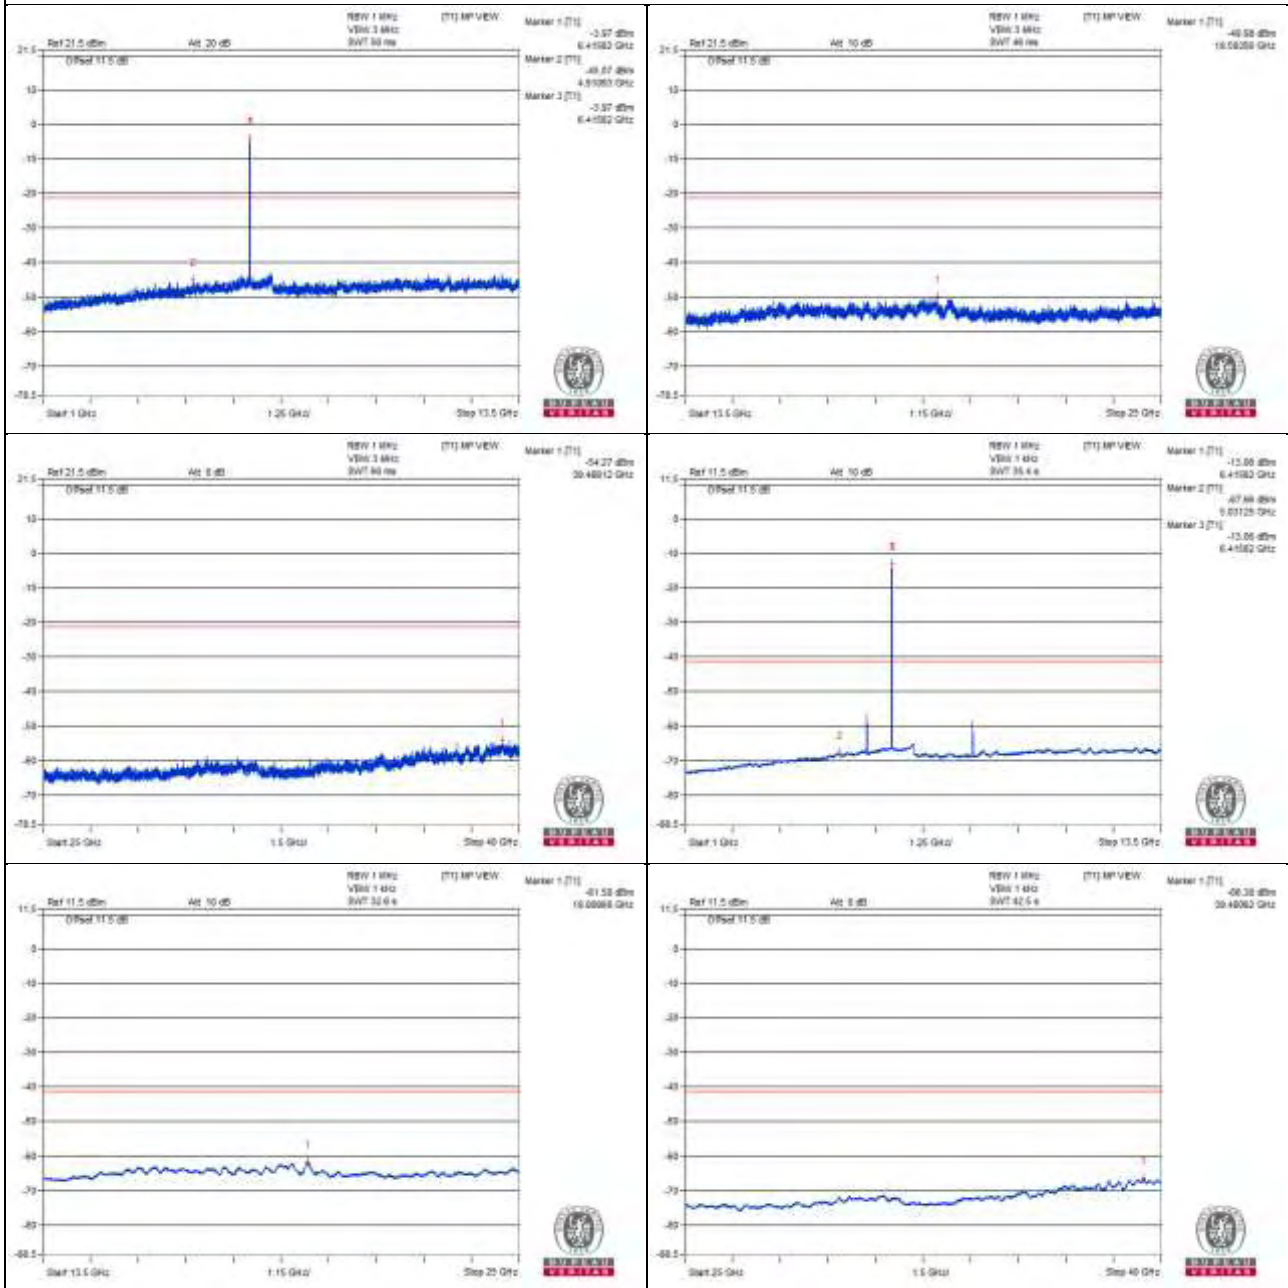

Chain 1

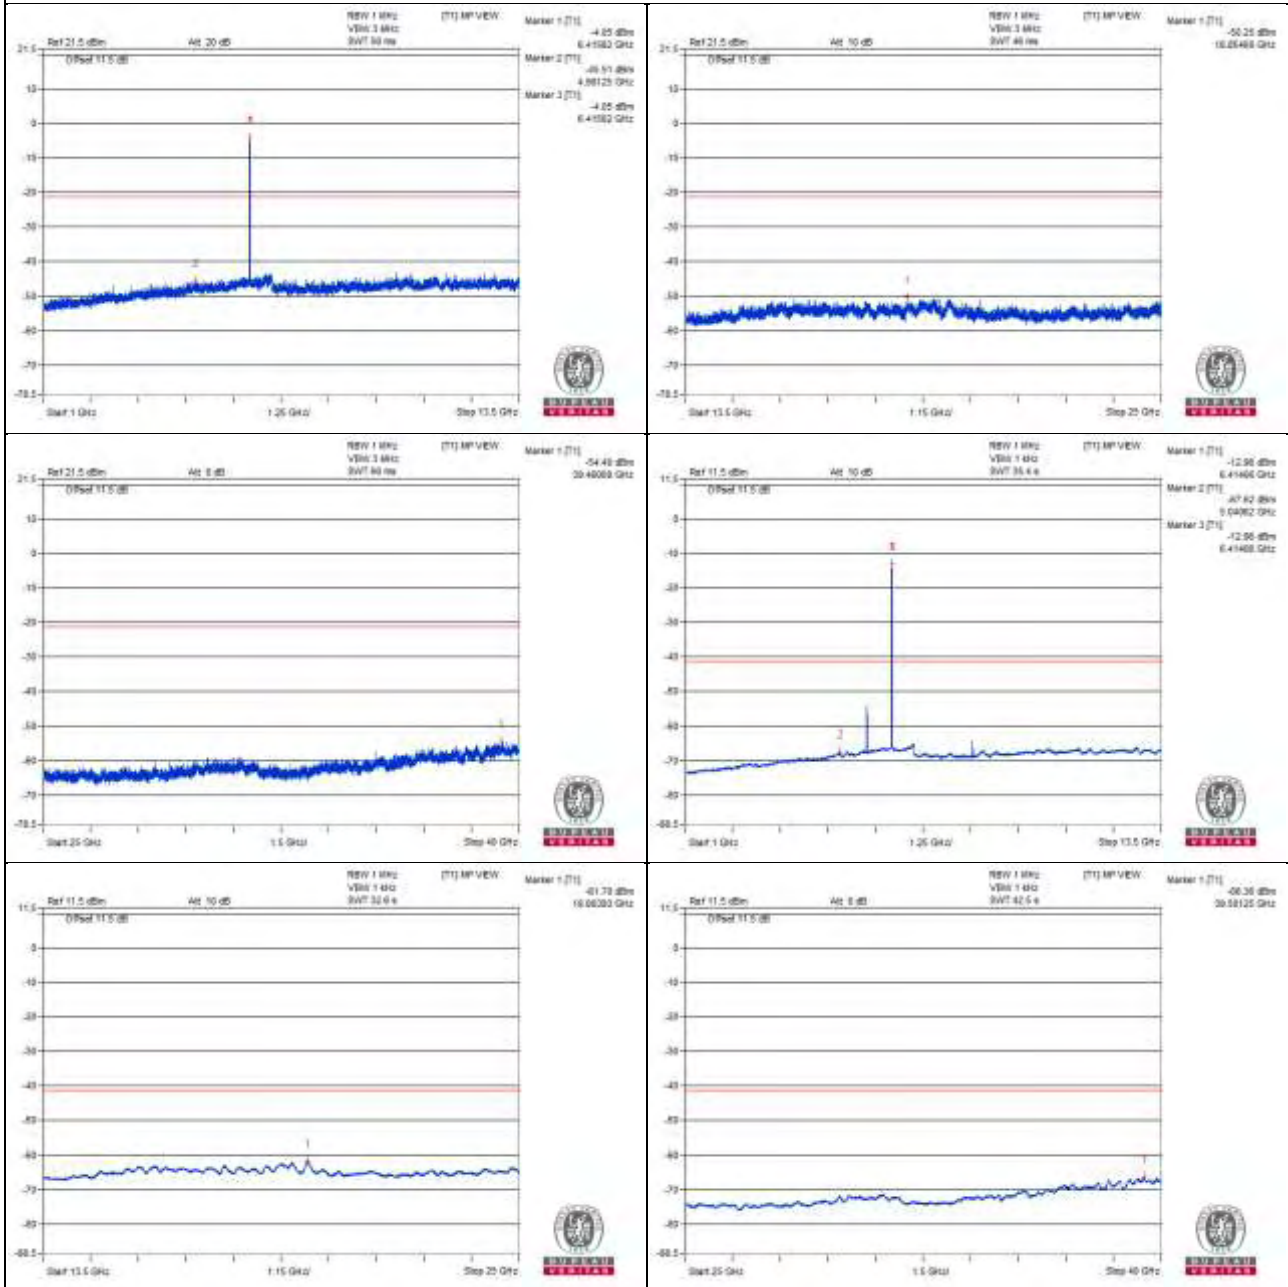

802.11a - Channel 97

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	12862.5 PK	61.06	88.2	-27.14	-46.1	-44.77	8.17	-34.2
2	12864.06 AV	40.17	68.2	-28.03	-66.15	-66.4	8.17	-55.09
3	19313.25 PK	55.12	74	-18.88	-50.93	-51.75	8.17	-40.14
4	19296 AV	43.5	54	-10.5	-63.11	-62.77	8.17	-51.76

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

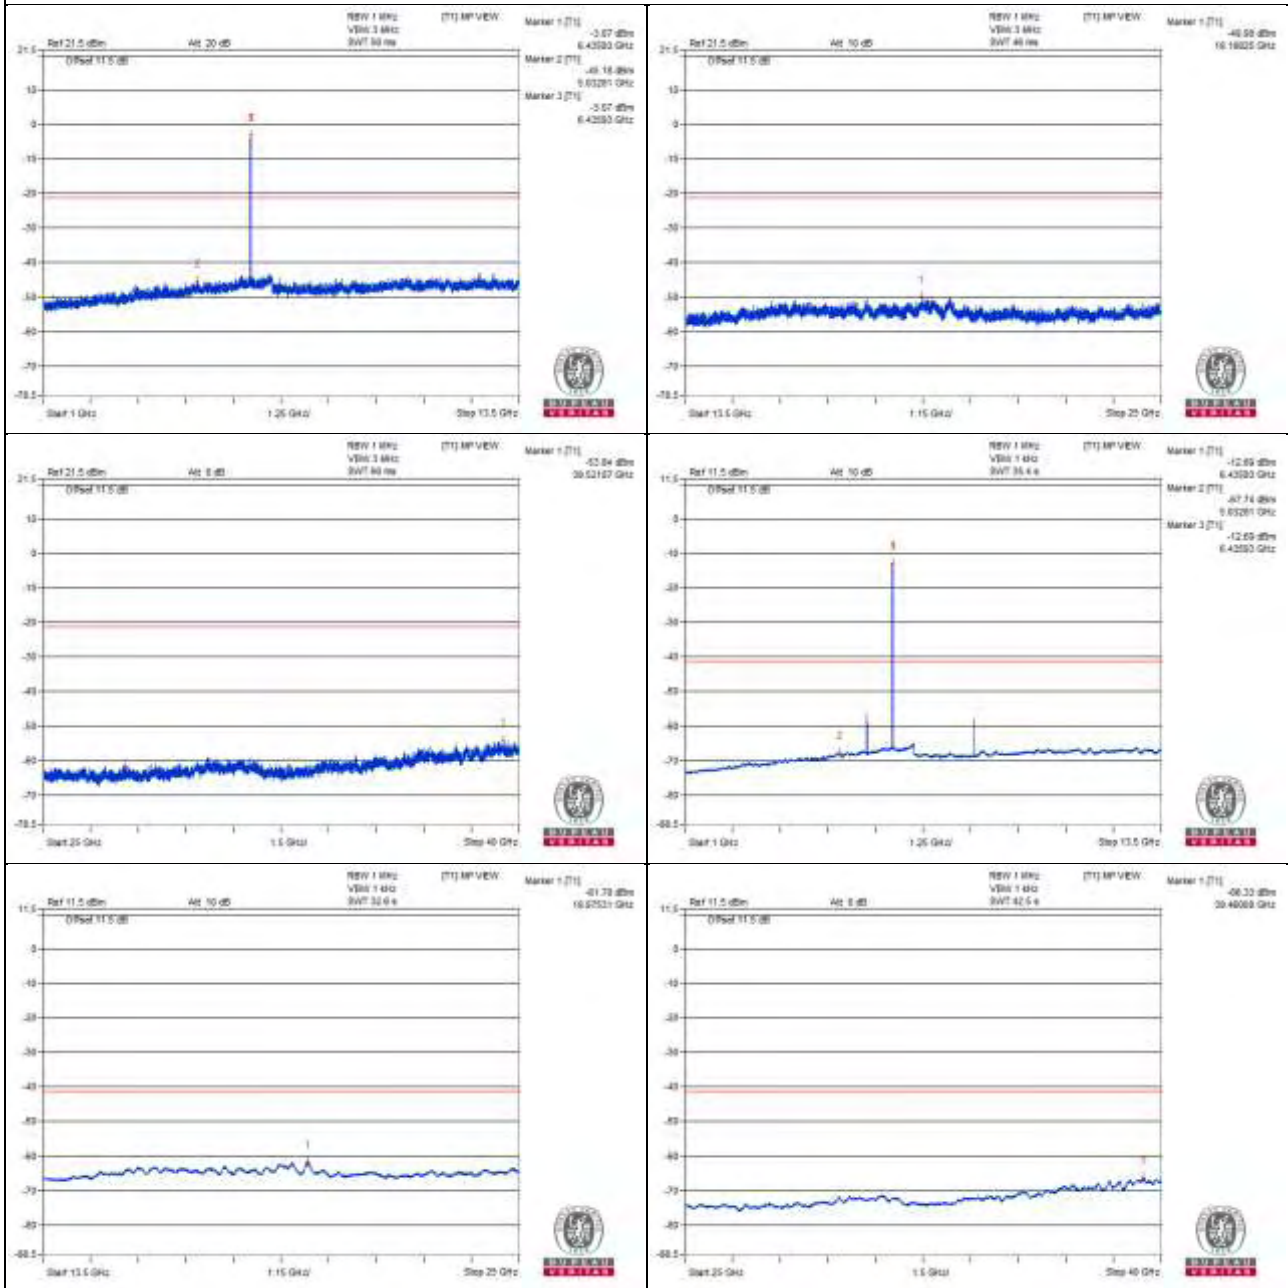

Chain 1

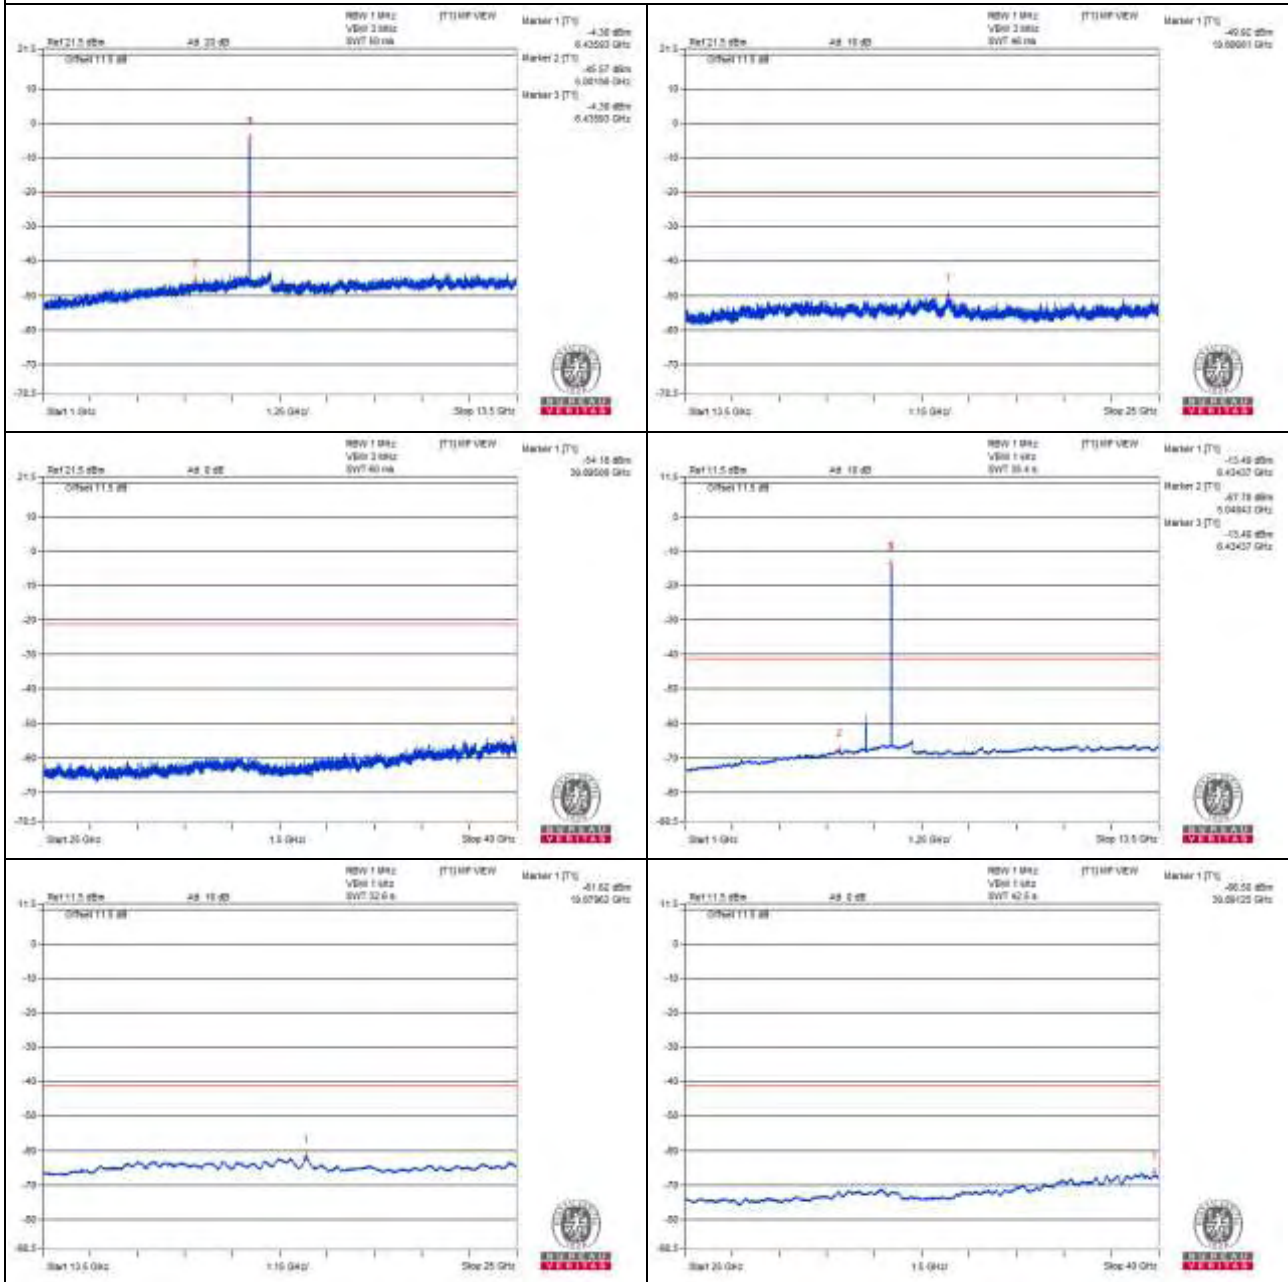

802.11a - Channel 105

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	12940.62 PK	61.11	88.2	-27.09	-46.64	-44.33	8.17	-34.15
2	12940.62 AV	39.12	68.2	-29.08	-67.41	-67.23	8.17	-56.14
3	19432.56 PK	53.76	74	-20.24	-52.68	-52.69	8.17	-41.5
4	19432.56 AV	43.19	54	-10.81	-63.14	-63.37	8.17	-52.07

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

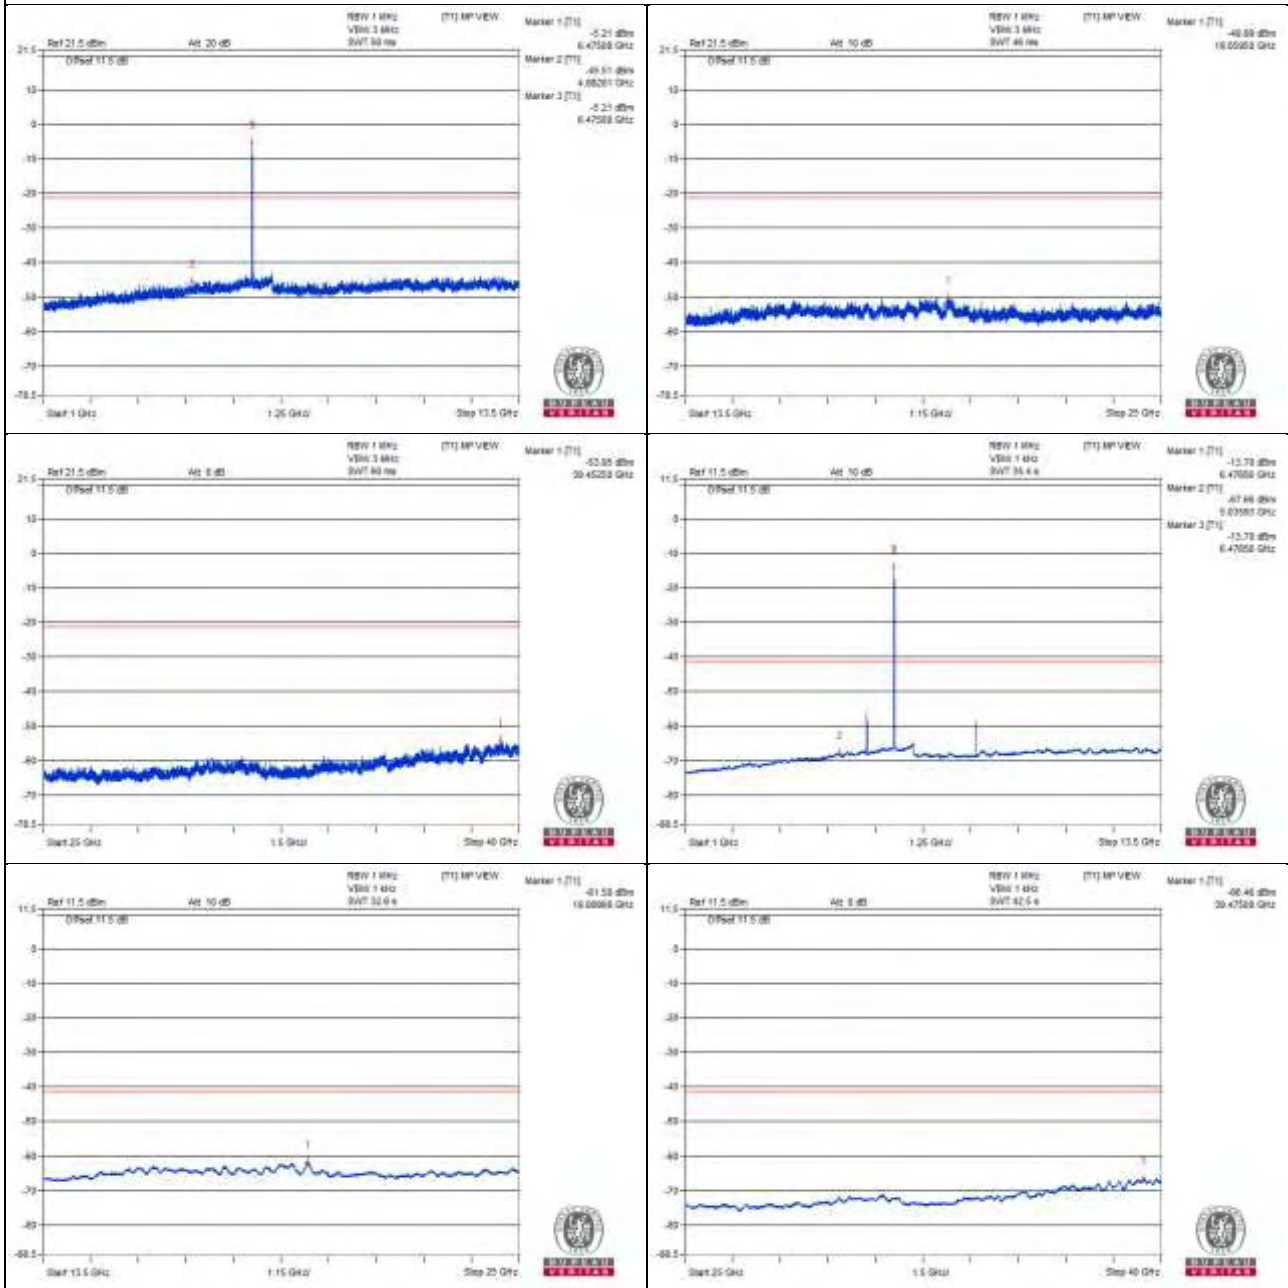

Chain 1

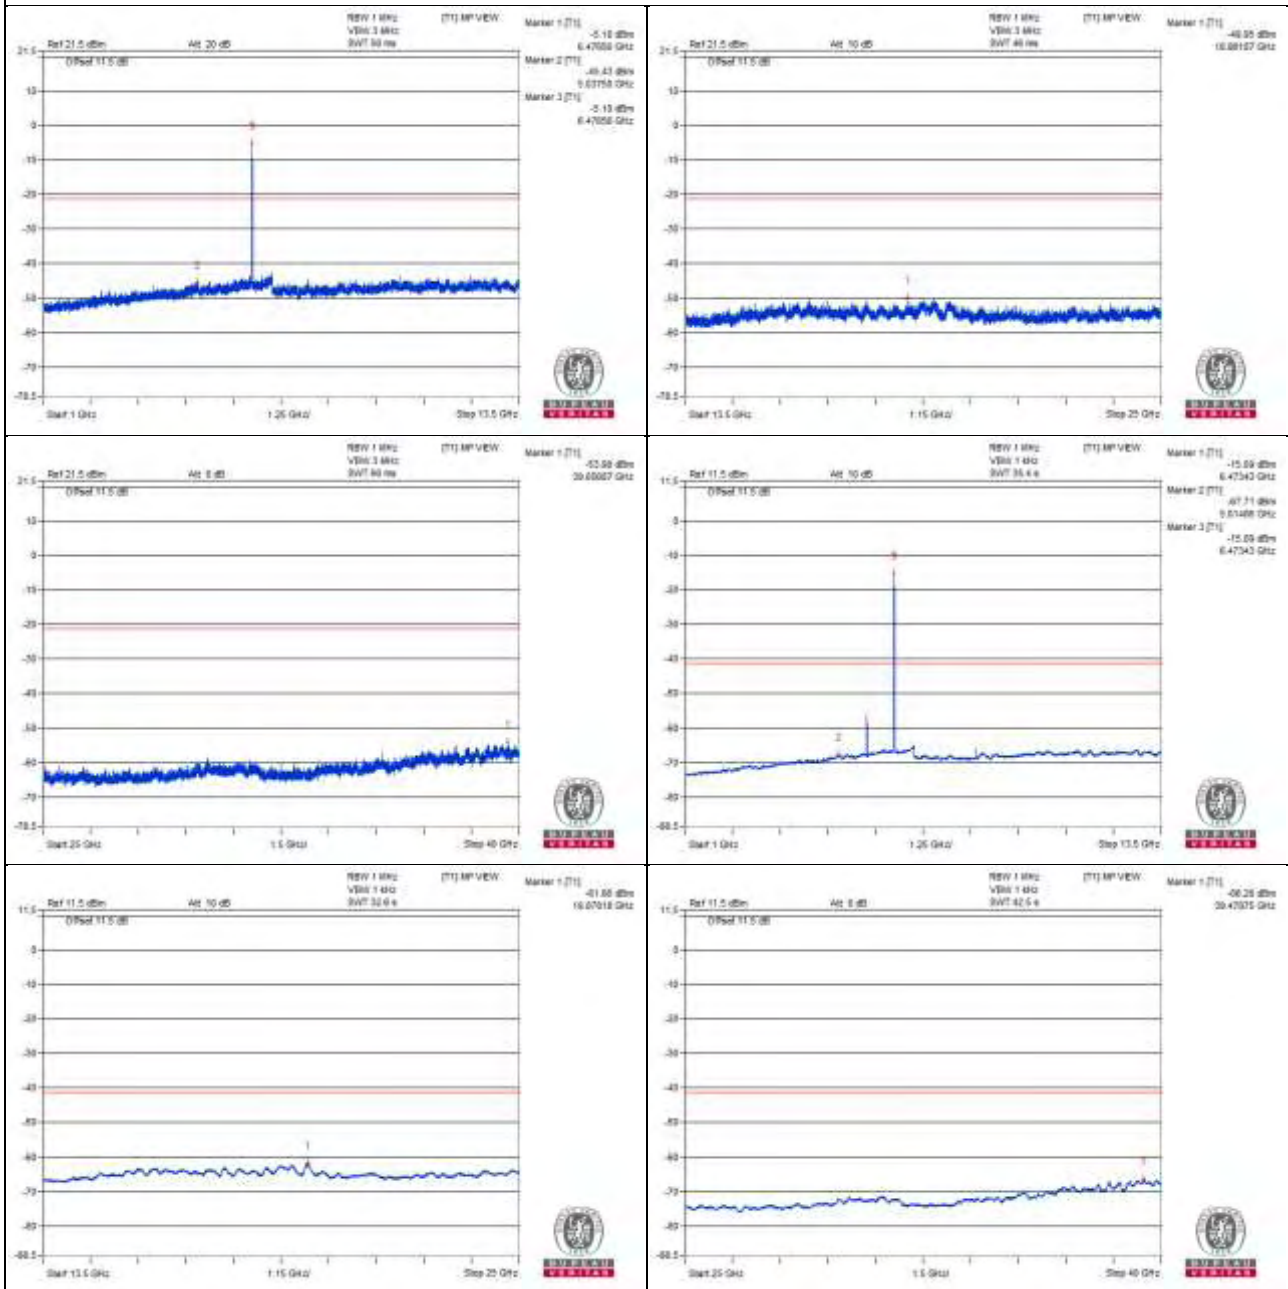

802.11a - Channel 113

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	13021.87 PK	60.63	88.2	-27.57	-45.01	-46.79	8.17	-34.63
2	13029.68 AV	39.15	68.2	-29.05	-67.28	-67.31	8.17	-56.11
3	19549 PK	55.01	74	-18.99	-52.41	-50.63	8.17	-40.25
4	19541.81 AV	43.98	54	-10.02	-62.43	-62.5	8.17	-51.28

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

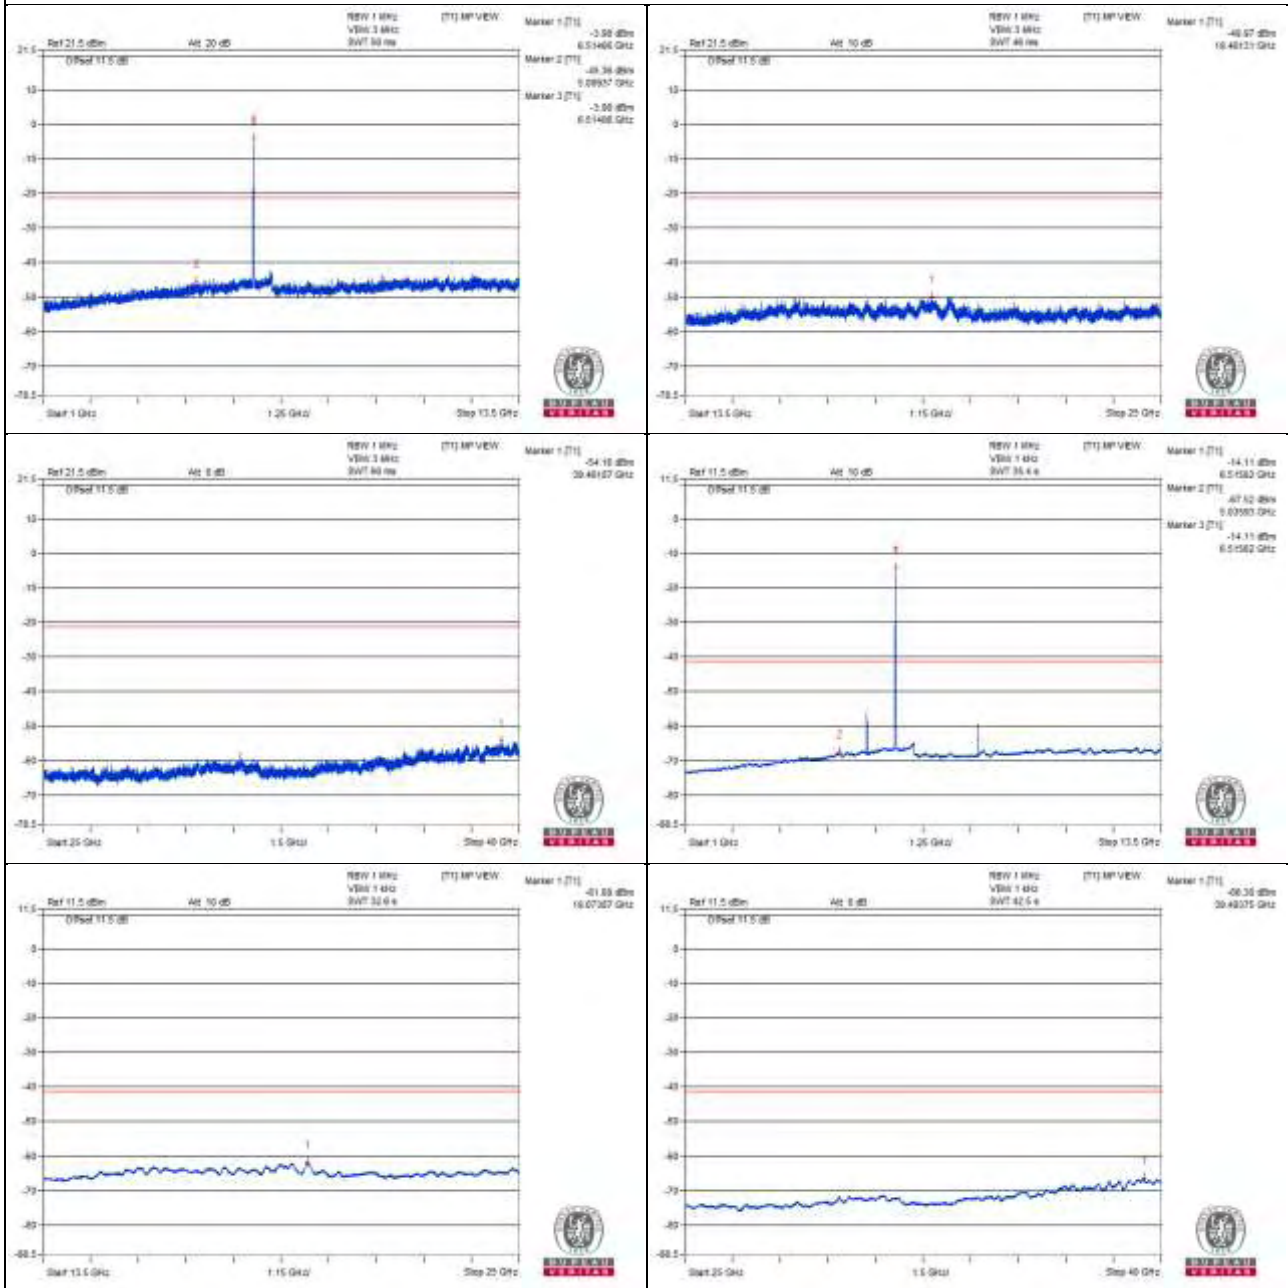

Chain 1

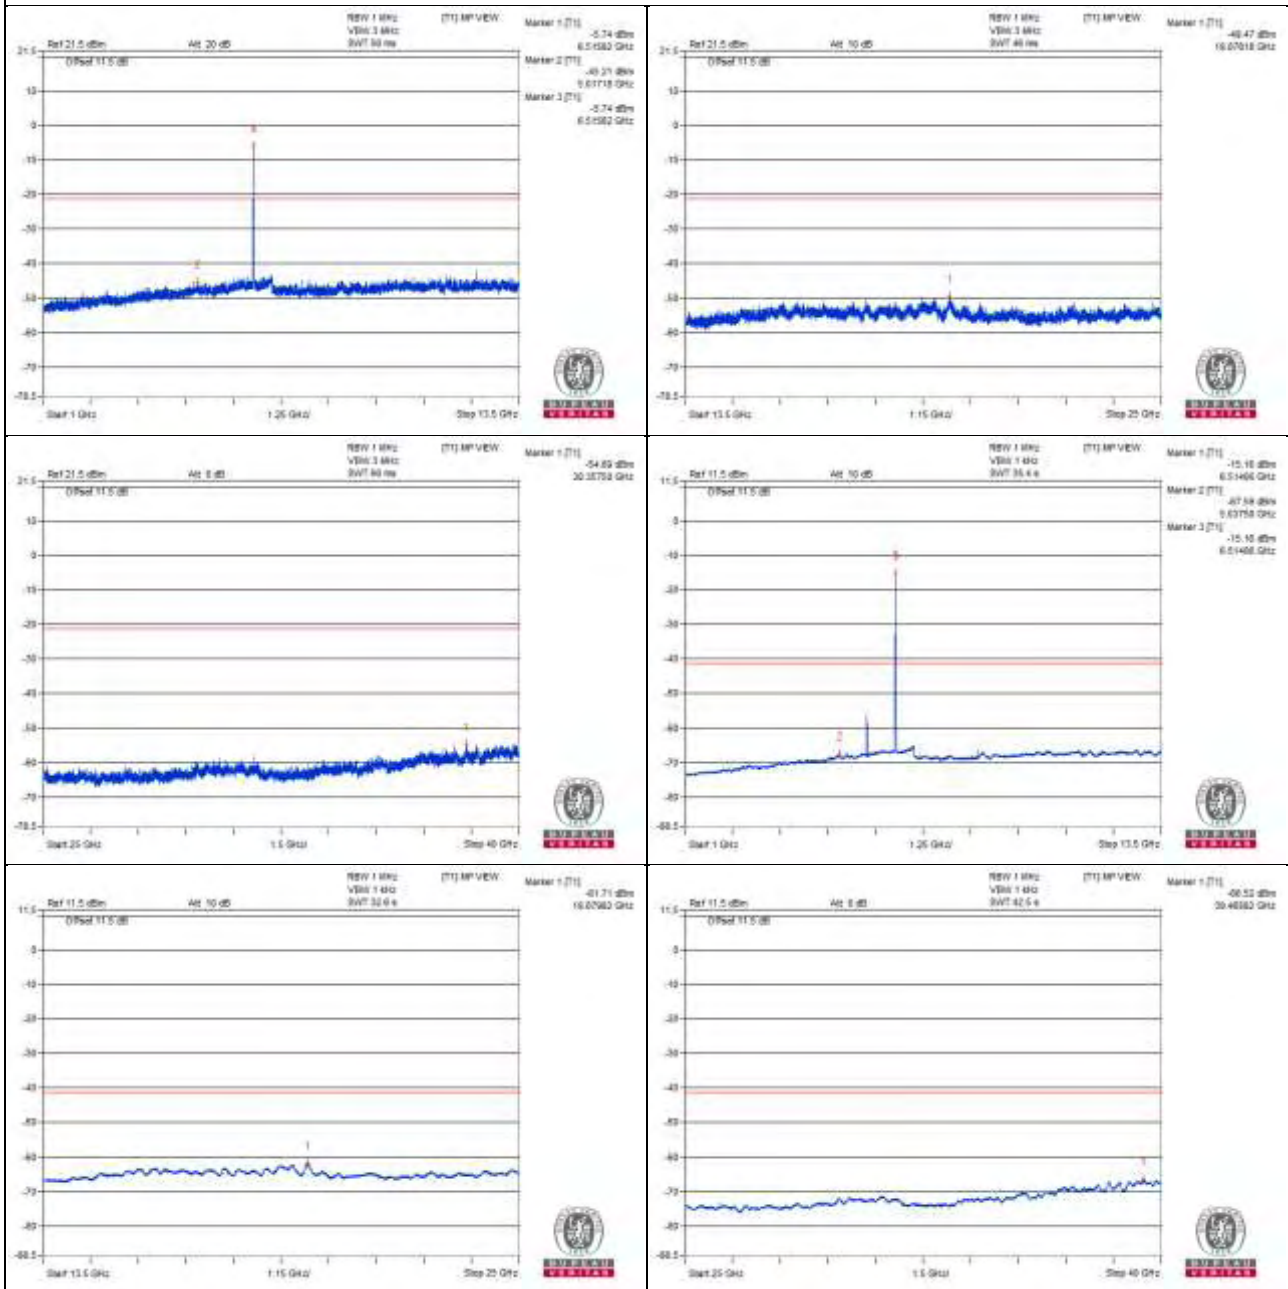

802.11a - Channel 117

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	13064.06 PK	60.44	88.2	-27.76	-46.47	-45.57	8.17	-34.82
2	13078.12 AV	39.65	68.2	-28.55	-66.74	-66.84	8.17	-55.61
3	19600.75 PK	53.87	74	-20.13	-51.53	-53.93	8.17	-41.39
4	19600.75 AV	42.62	54	-11.38	-63.89	-63.76	8.17	-52.64

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

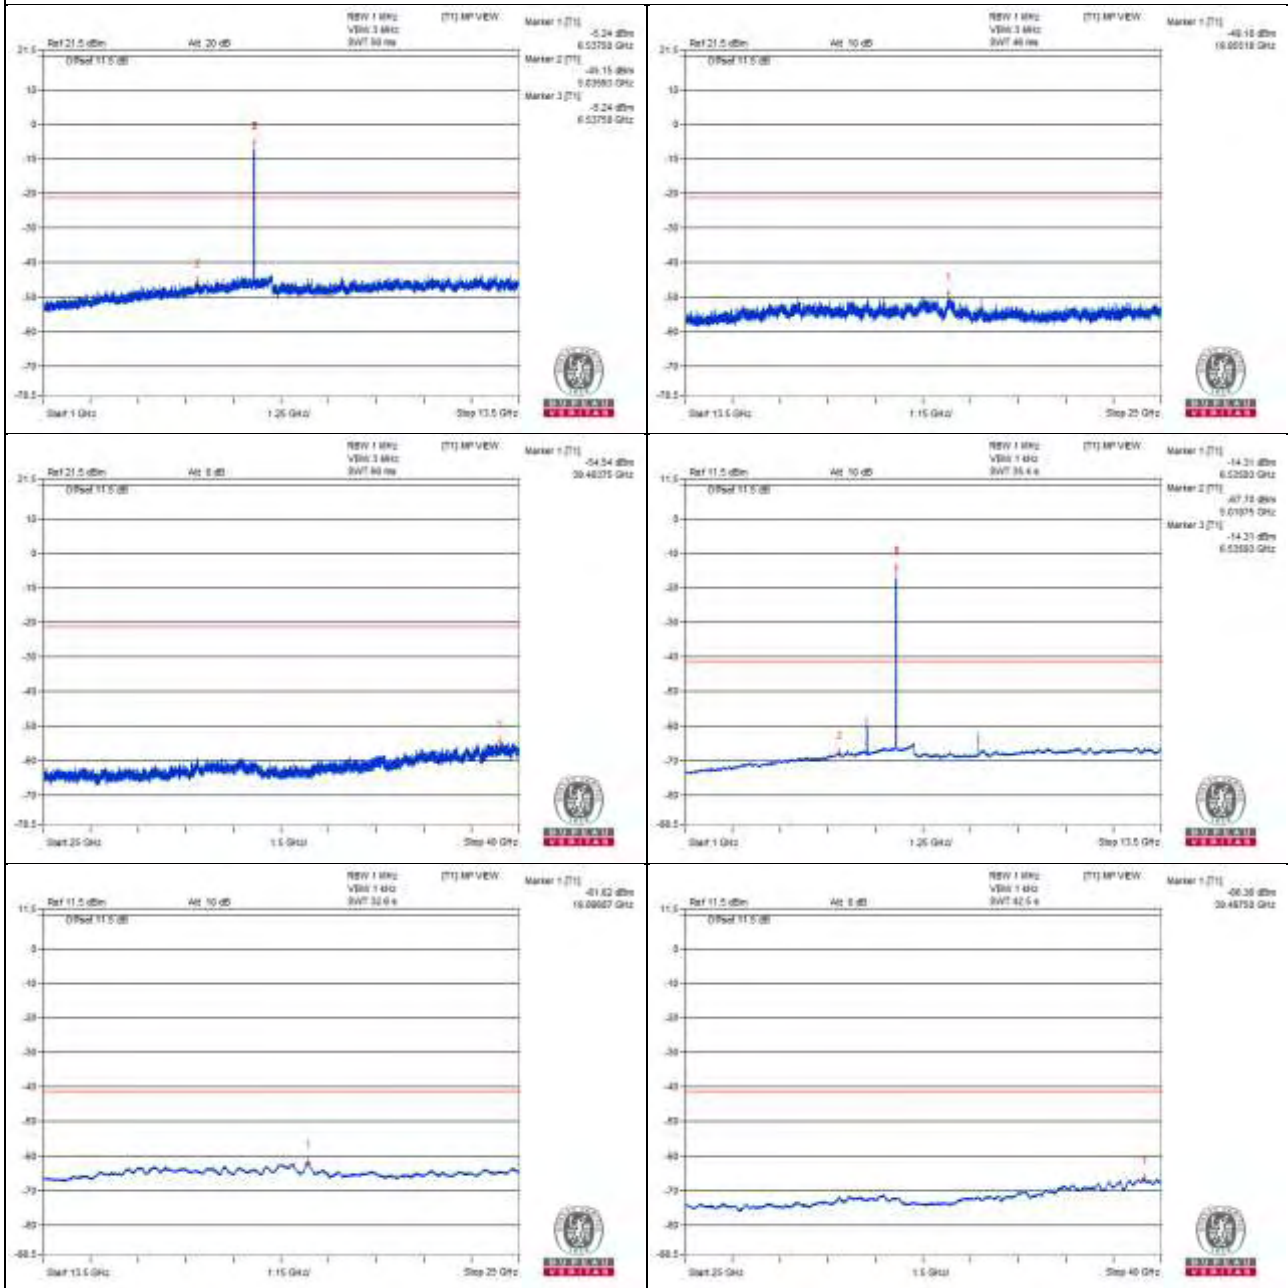

Chain 1

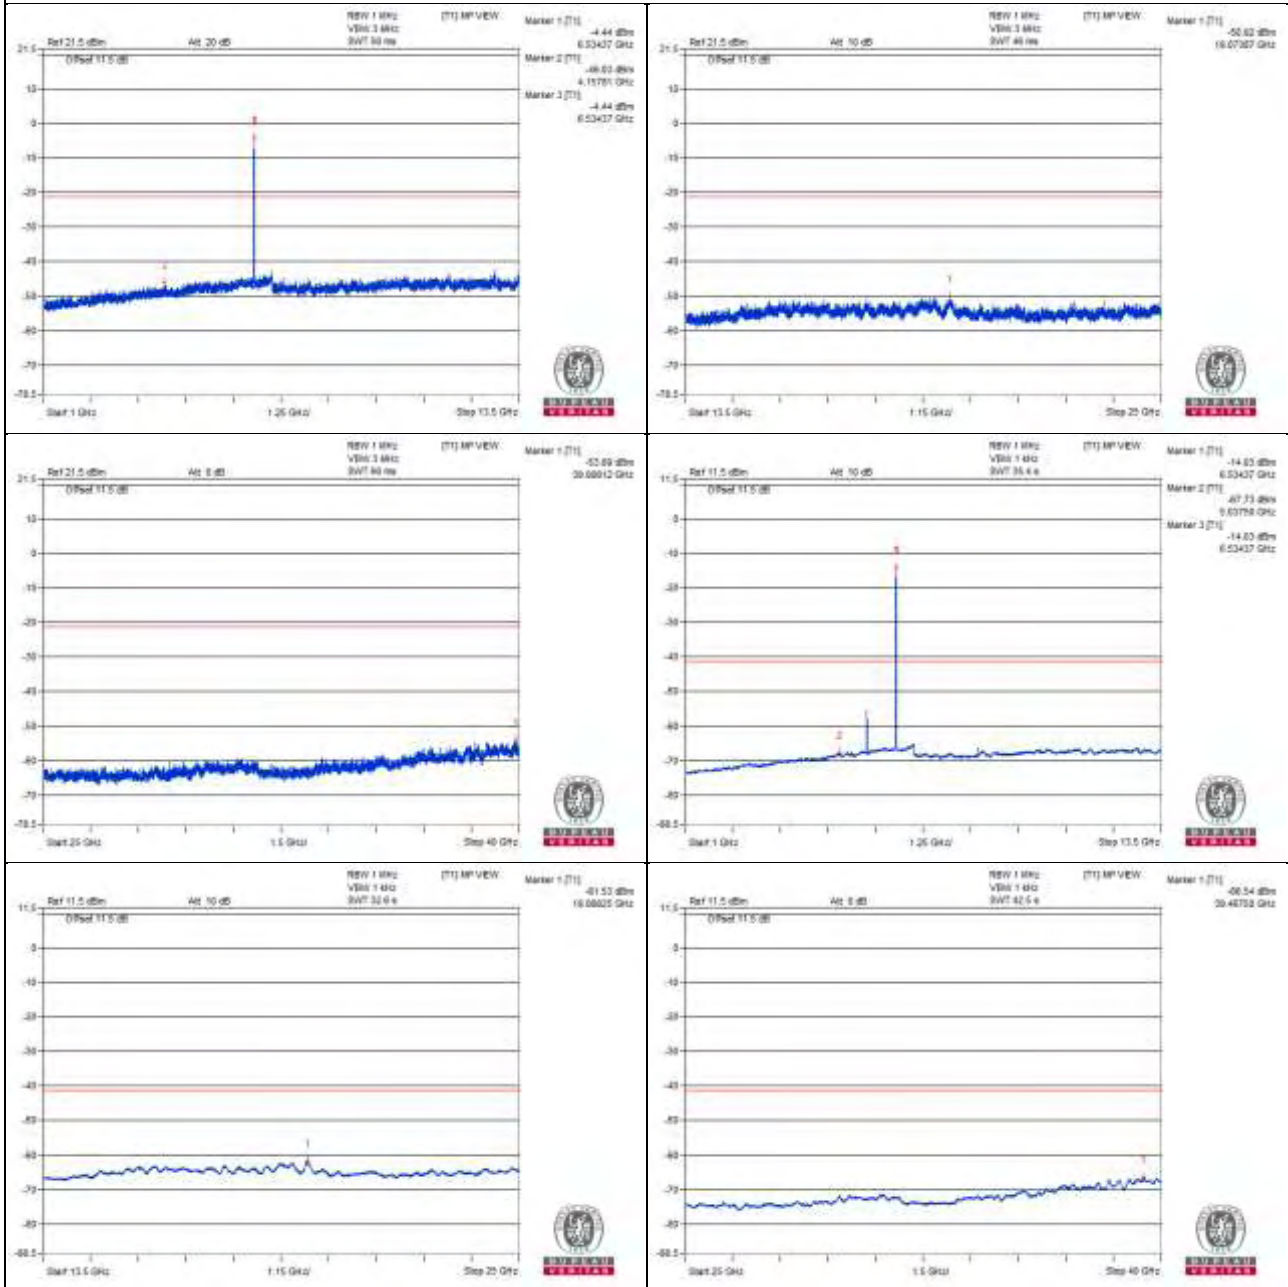

802.11a - Channel 149

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	13390.62 PK	60.16	74	-13.84	-46.02	-46.55	8.17	-35.1
2	13396.87 AV	38.76	54	-15.24	-67.45	-67.92	8.17	-56.5
3	20088.06 PK	52.61	74	-21.39	-53.28	-54.46	8.17	-42.65
4	20089.5 AV	41.36	54	-12.64	-65.12	-65.05	8.17	-53.9

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

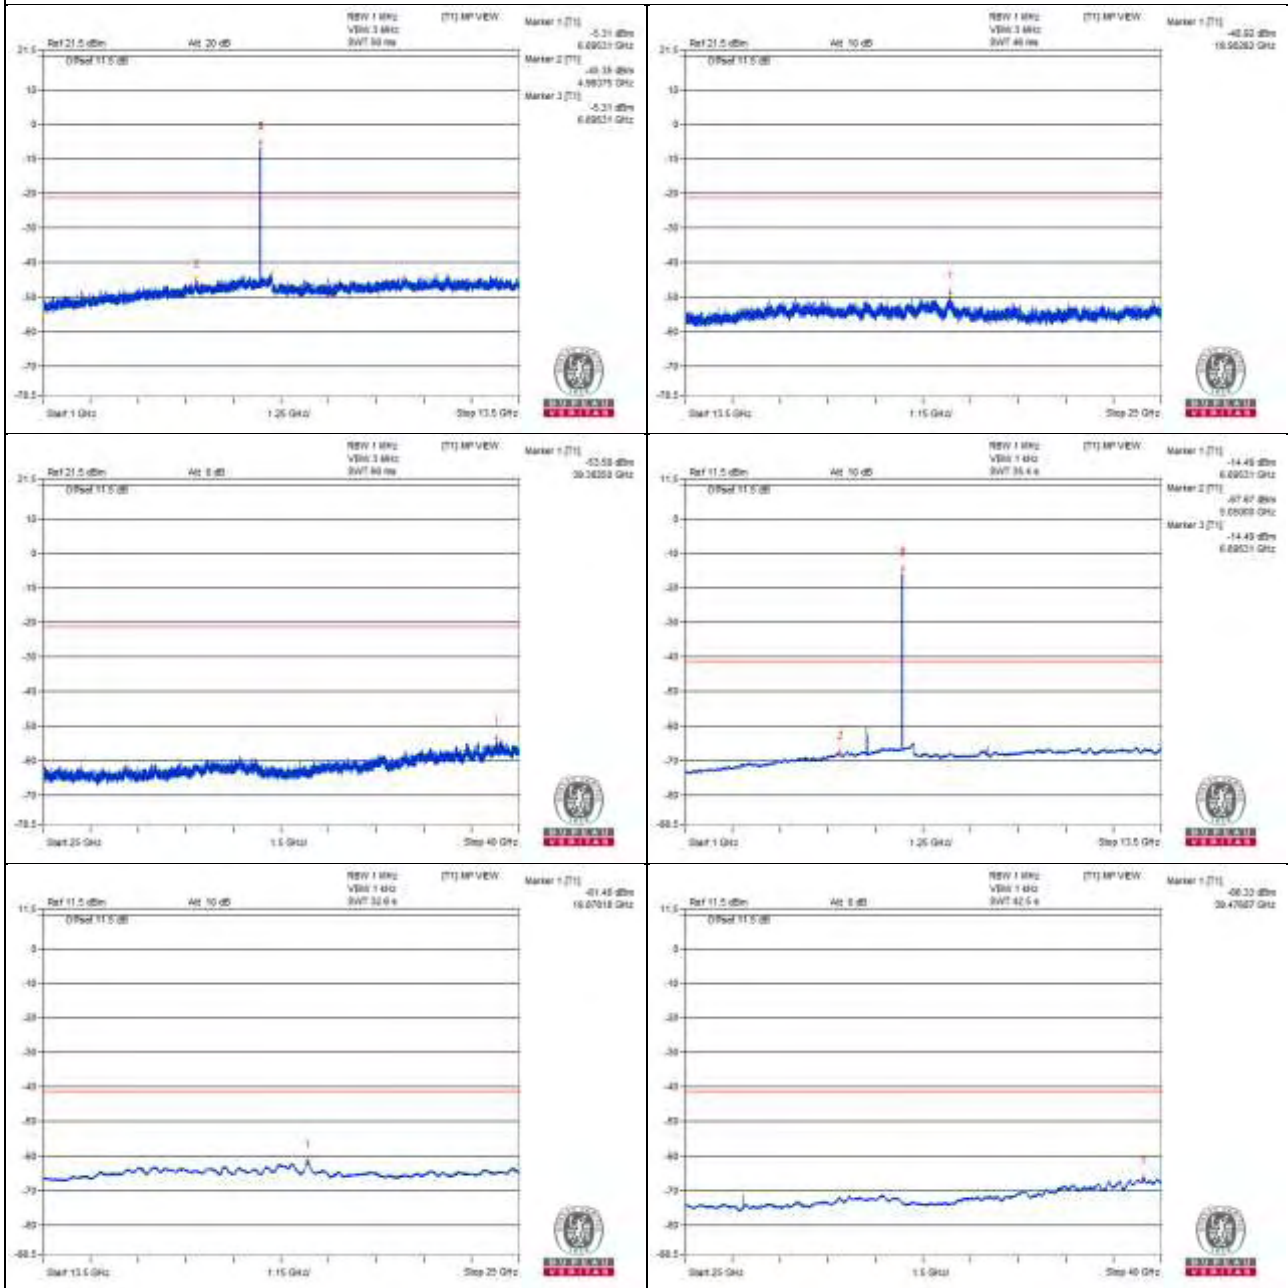

Chain 1

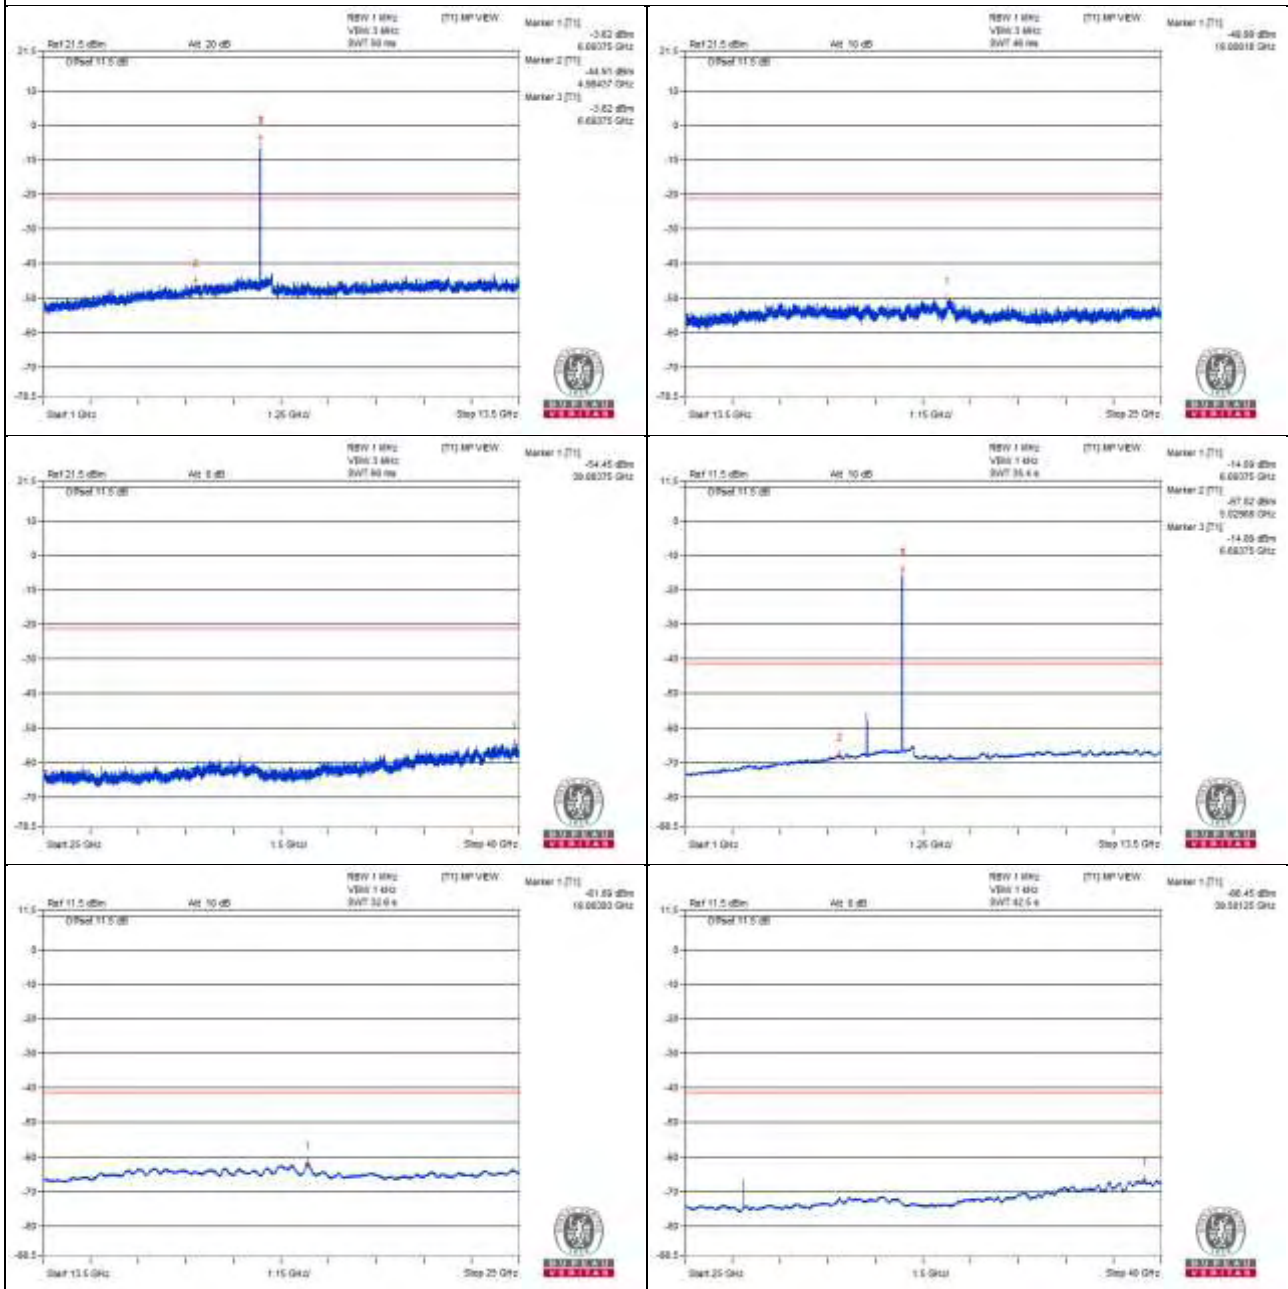

802.11a - Channel 181

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	13704.12 PK	51.47	88.2	-36.73	-55.78	-54.28	8.17	-43.79
2	13715.62 AV	39.6	68.2	-28.6	-66.68	-67	8.17	-55.66
3	20558.12 PK	52.41	74	-21.59	-55.21	-53.11	8.17	-42.85
4	20571.06 AV	41.16	54	-12.84	-65.13	-65.43	8.17	-54.1

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

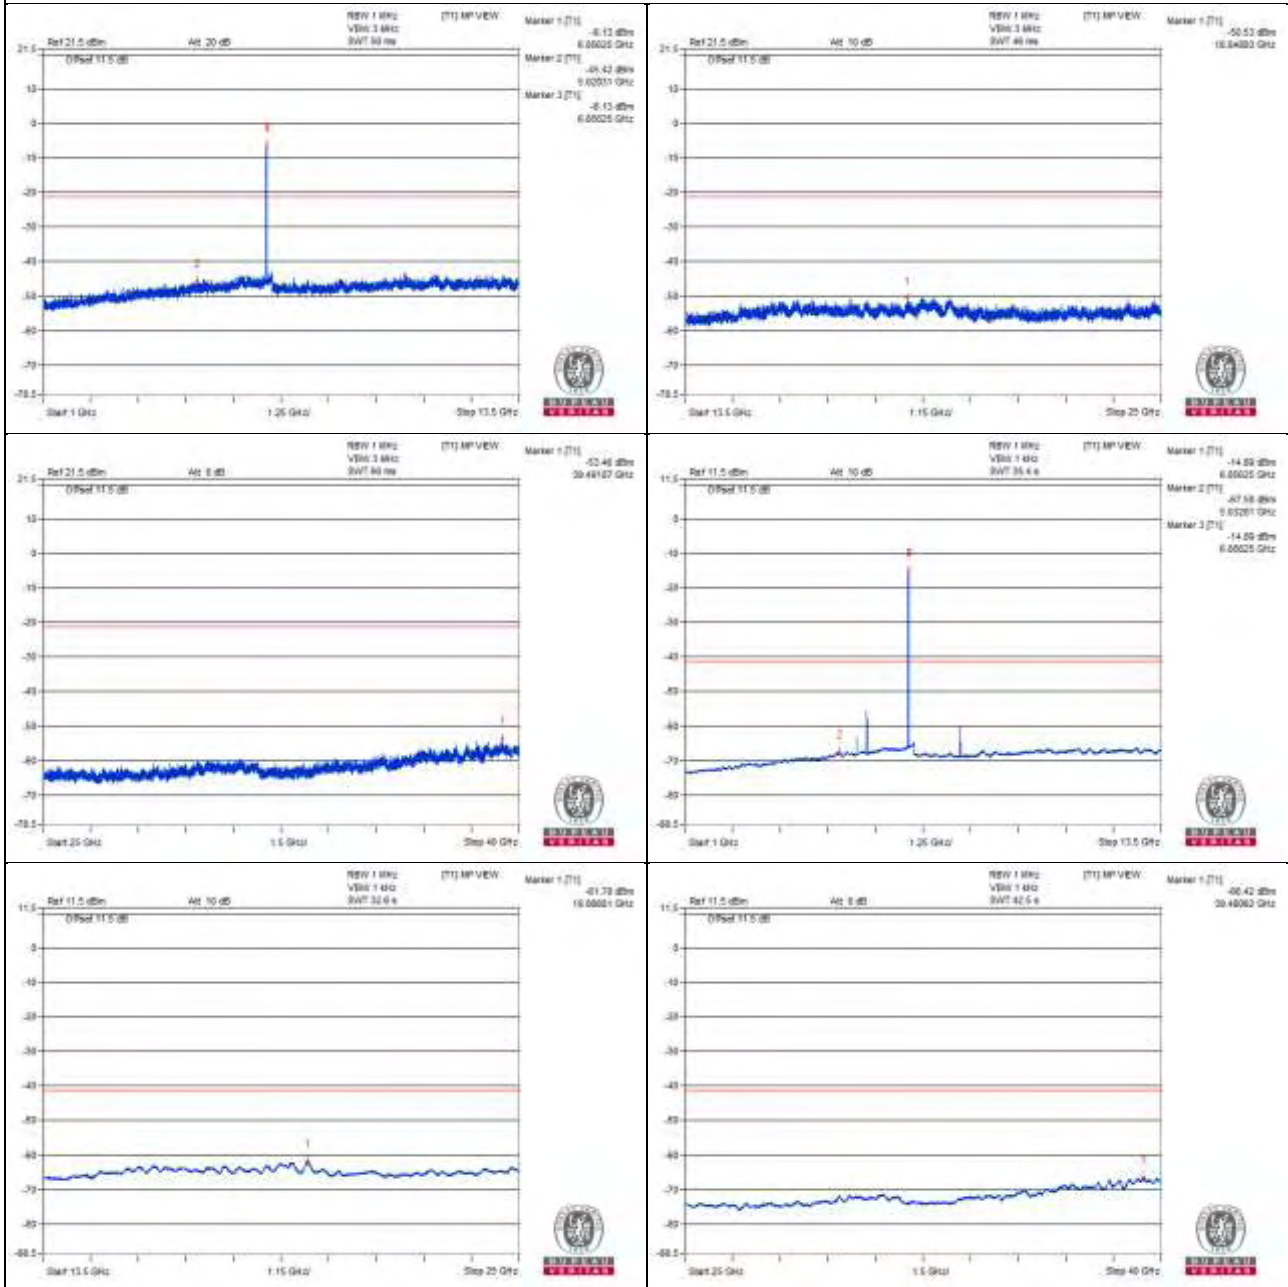

Chain 1

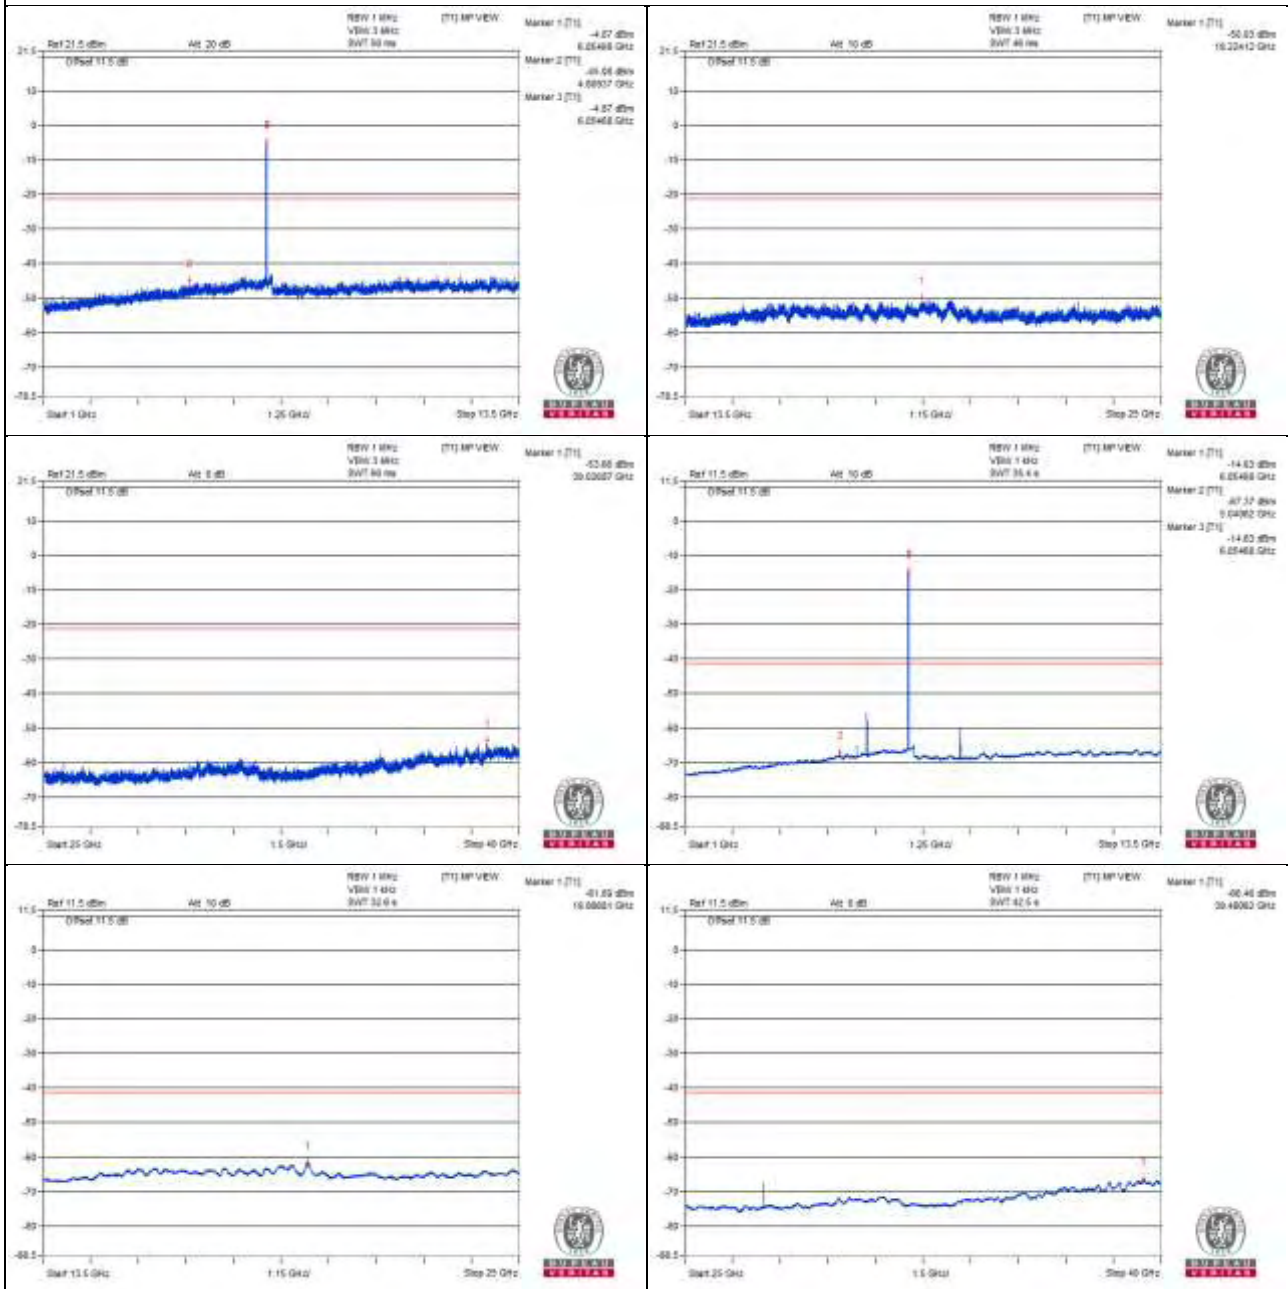

802.11a - Channel 185

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	13745.81 PK	51.3	88.2	-36.9	-55.74	-54.62	8.17	-43.96
2	13748.68 AV	39.84	68.2	-28.36	-67	-66.23	8.17	-55.42
3	20631.43 PK	53.42	74	-20.58	-51.9	-54.52	8.17	-41.84
4	20632.87 AV	41.74	54	-12.26	-64.51	-64.89	8.17	-53.52

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

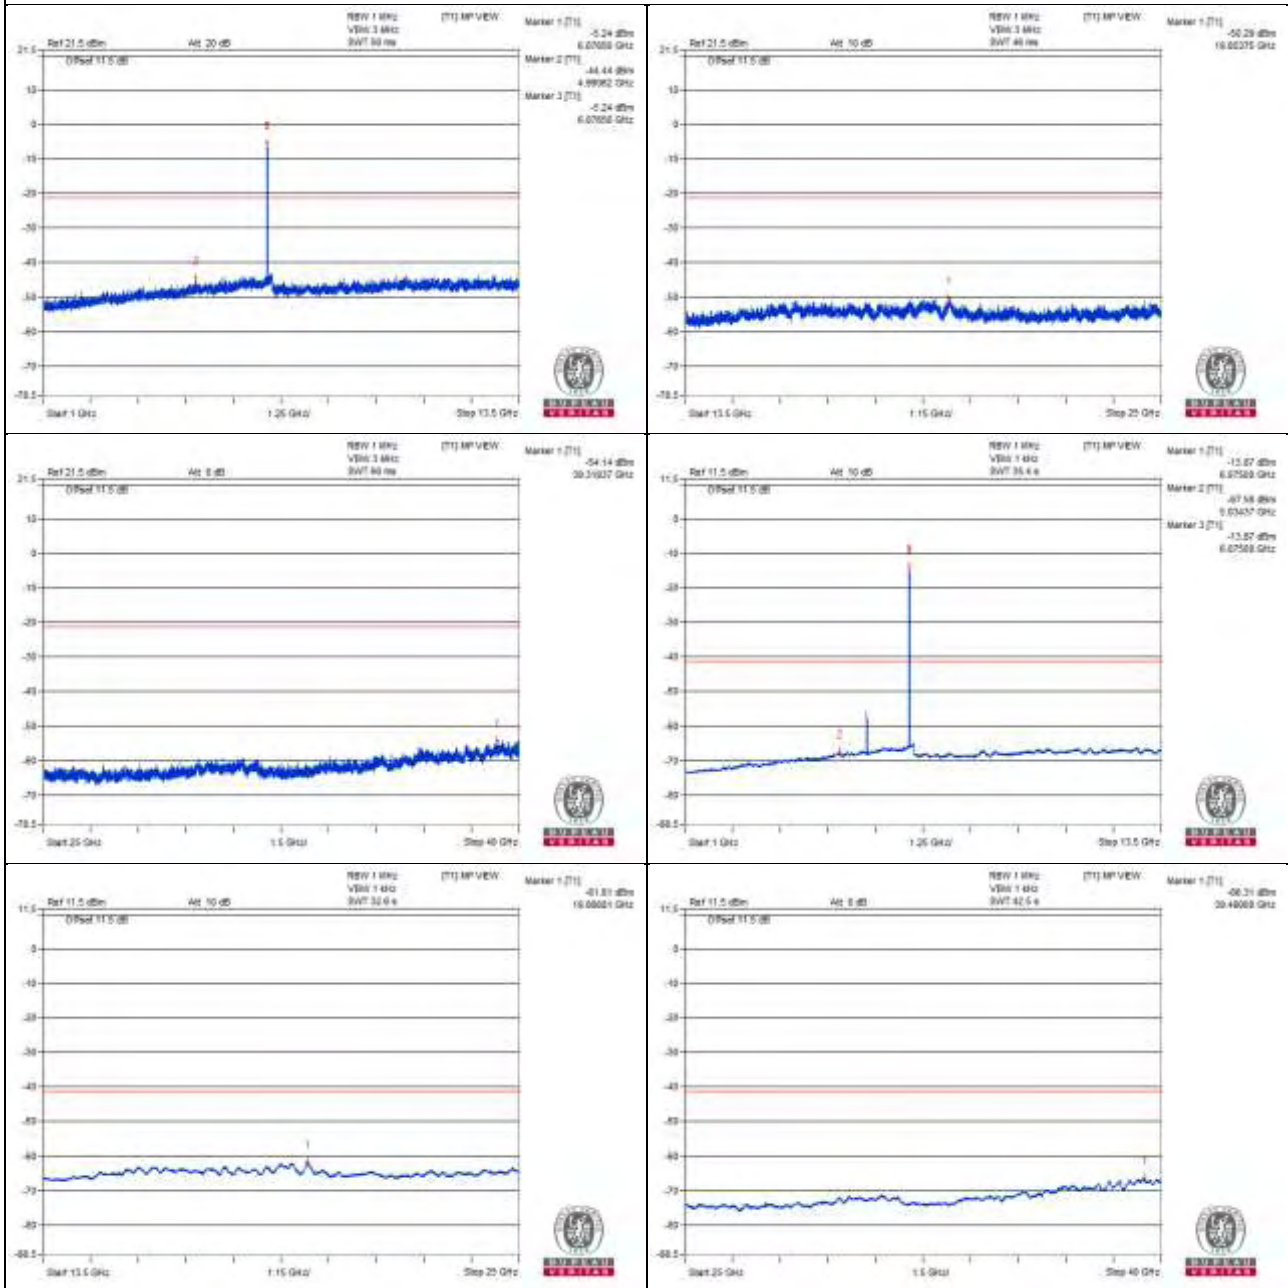

Chain 1

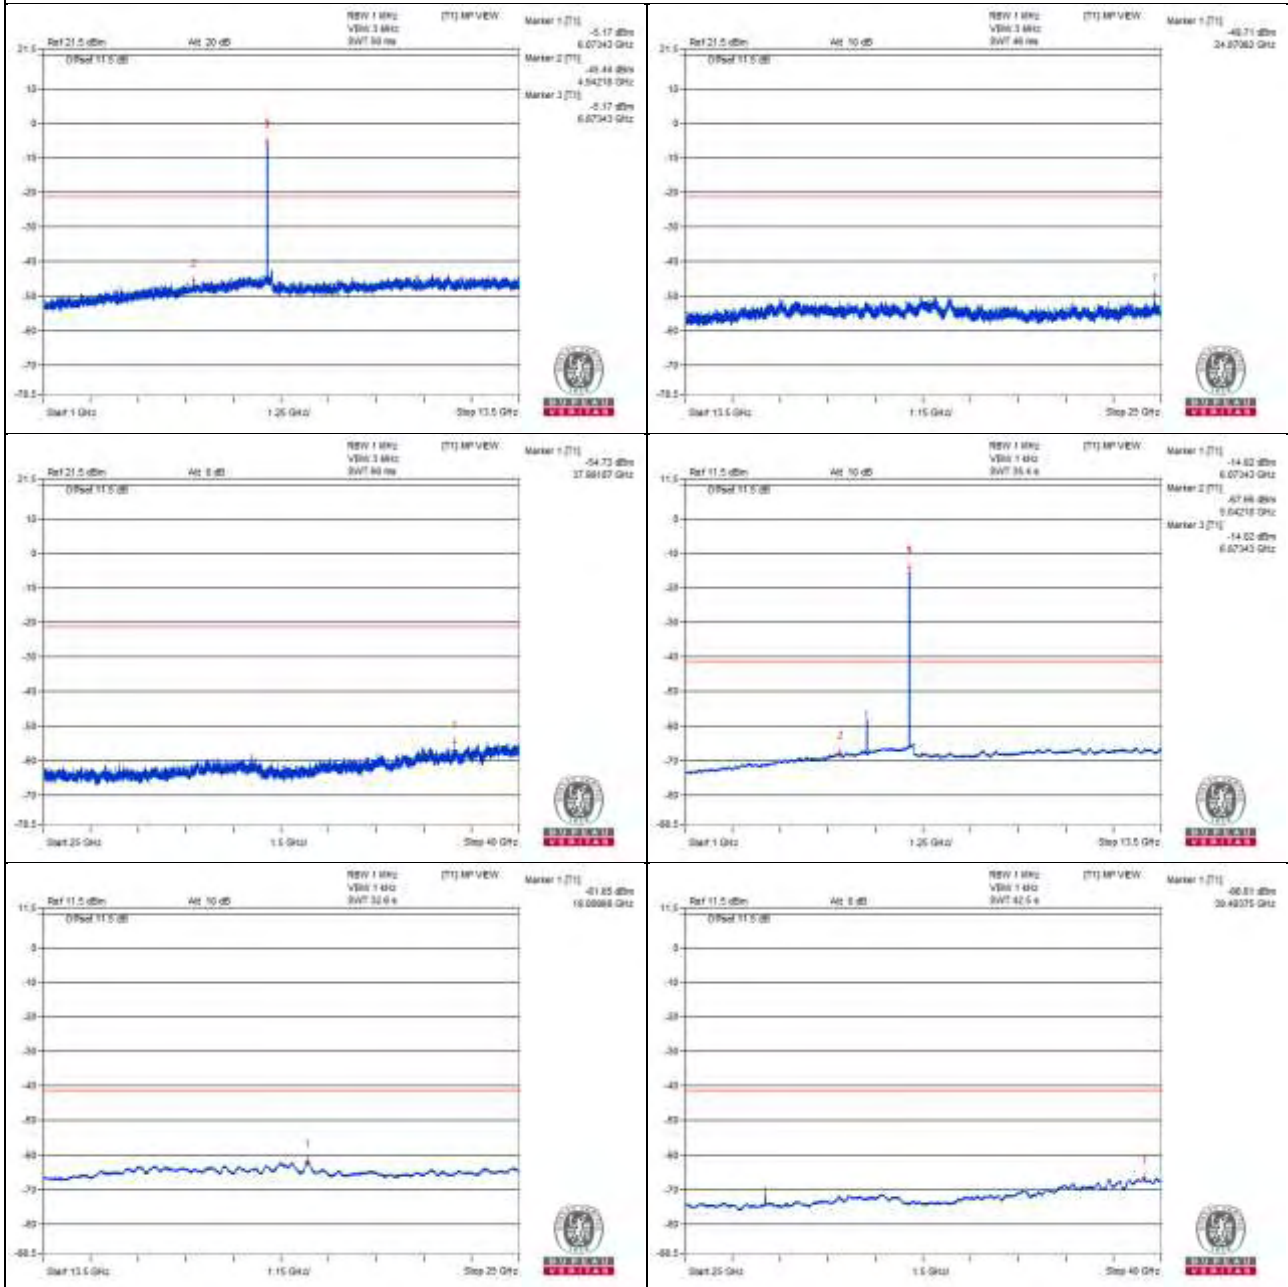

802.11a - Channel 209

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	13997.37 PK	50.62	88.2	-37.58	-54.56	-57.59	8.17	-44.64
2	13997.37 AV	39.59	68.2	-28.61	-66.86	-66.84	8.17	-55.67
3	20976.43 PK	51.83	74	-22.17	-54.87	-54.37	8.17	-43.43
4	20979.31 AV	40.96	54	-13.04	-65.56	-65.41	8.17	-54.3

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

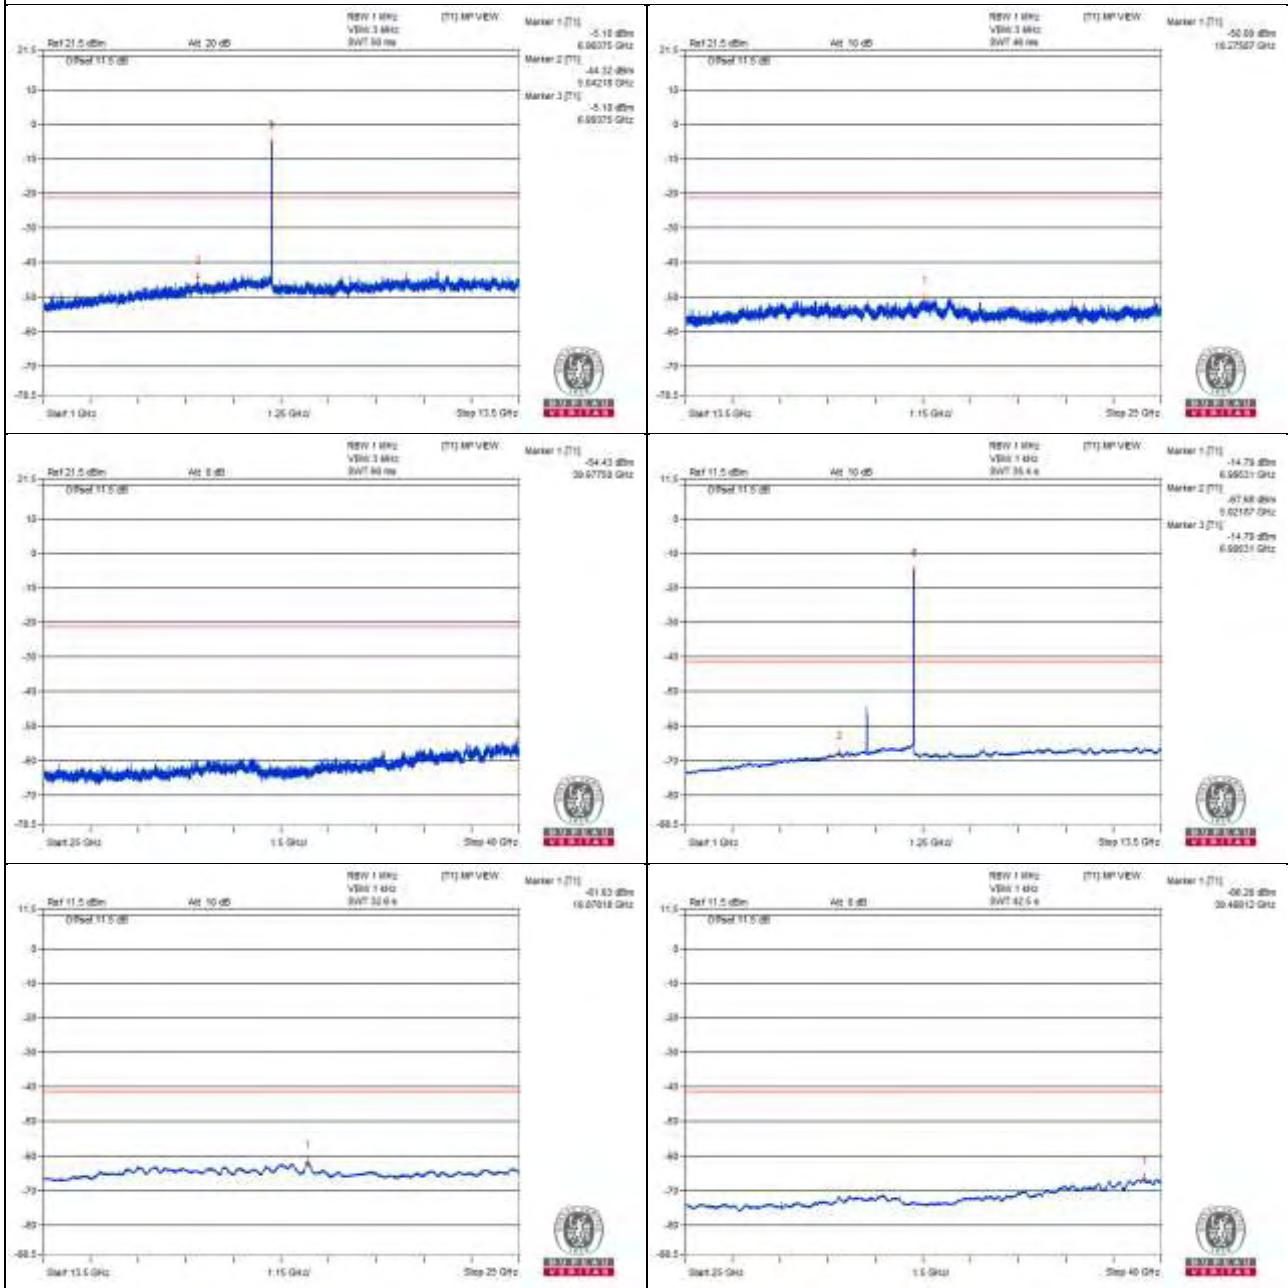

Chain 1

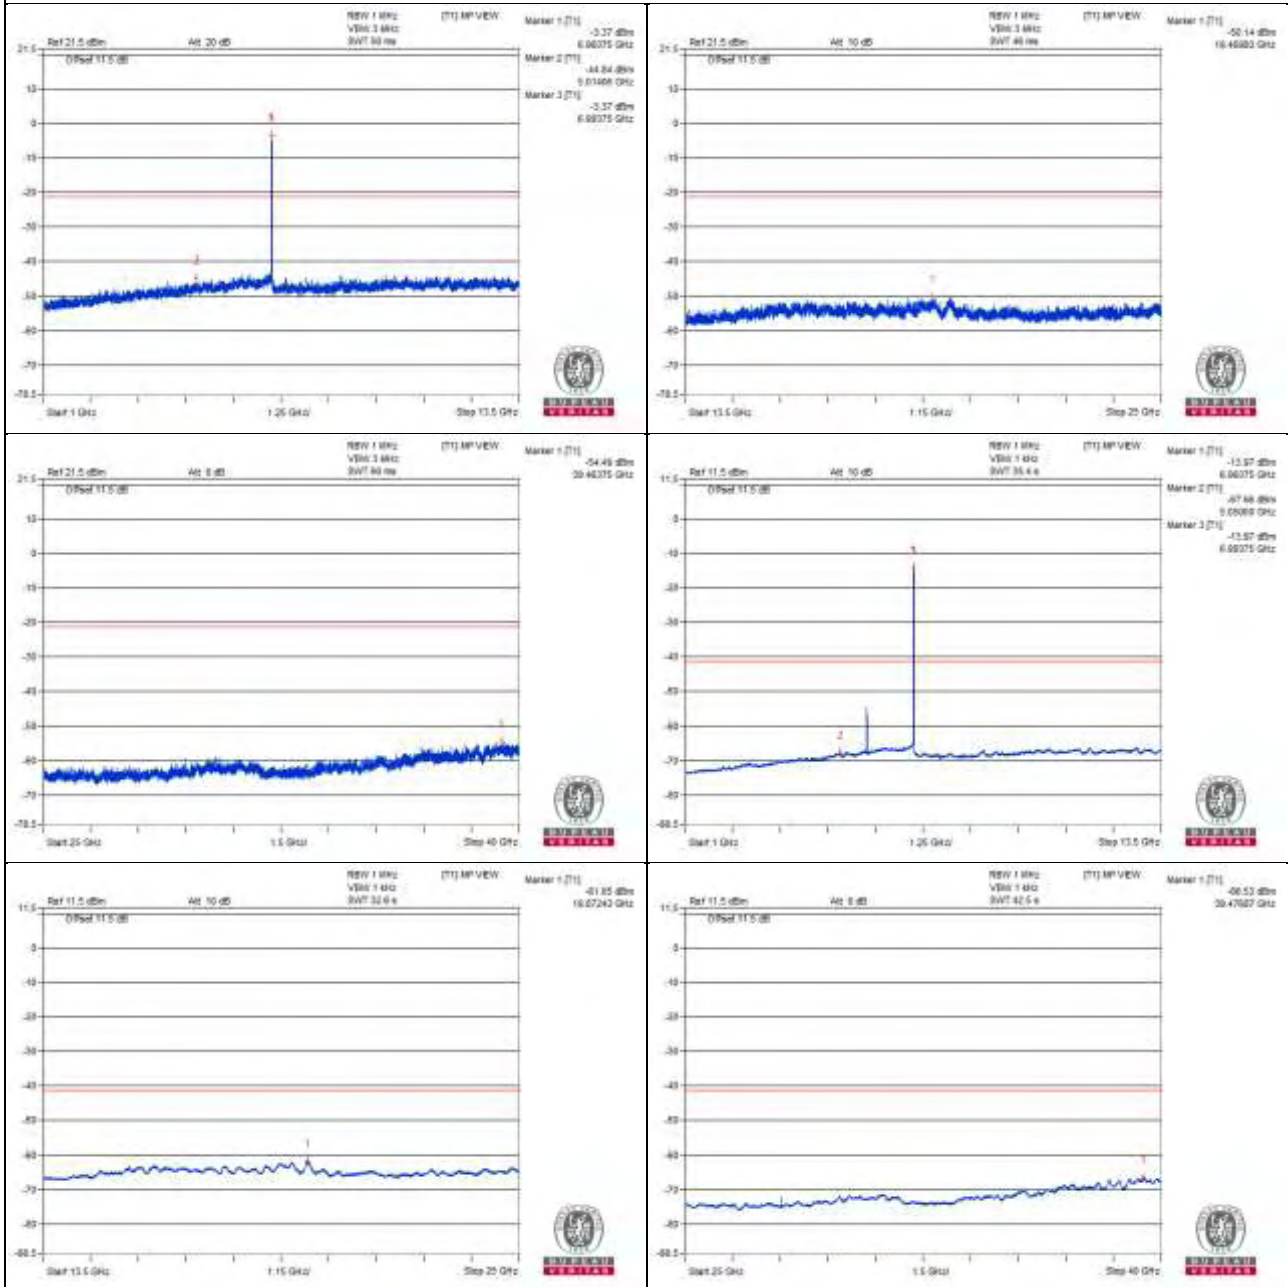

802.11a - Channel 229

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	14194.31 PK	51.27	88.2	-36.93	-54.38	-56.14	8.17	-43.99
2	14198.62 AV	40.58	68.2	-27.62	-65.93	-65.8	8.17	-54.68
3	21292.68 PK	52.46	74	-21.54	-53.31	-54.78	8.17	-42.8
4	21292.68 AV	41.51	54	-12.49	-65.01	-64.85	8.17	-53.75

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

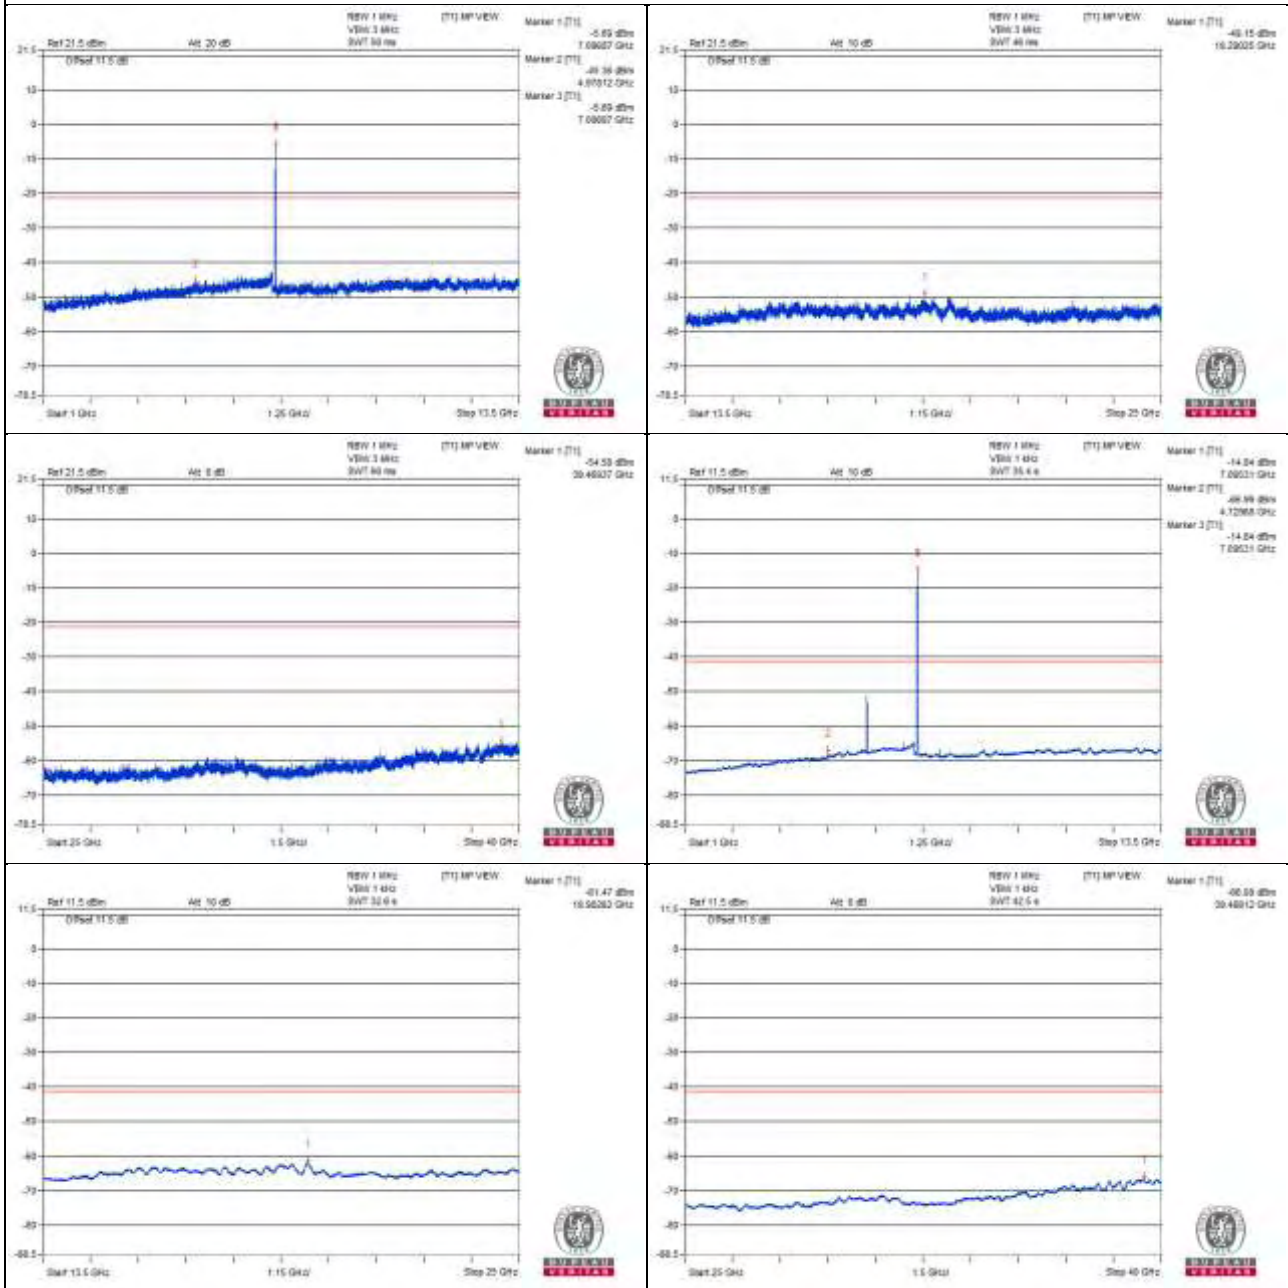

Chain 1

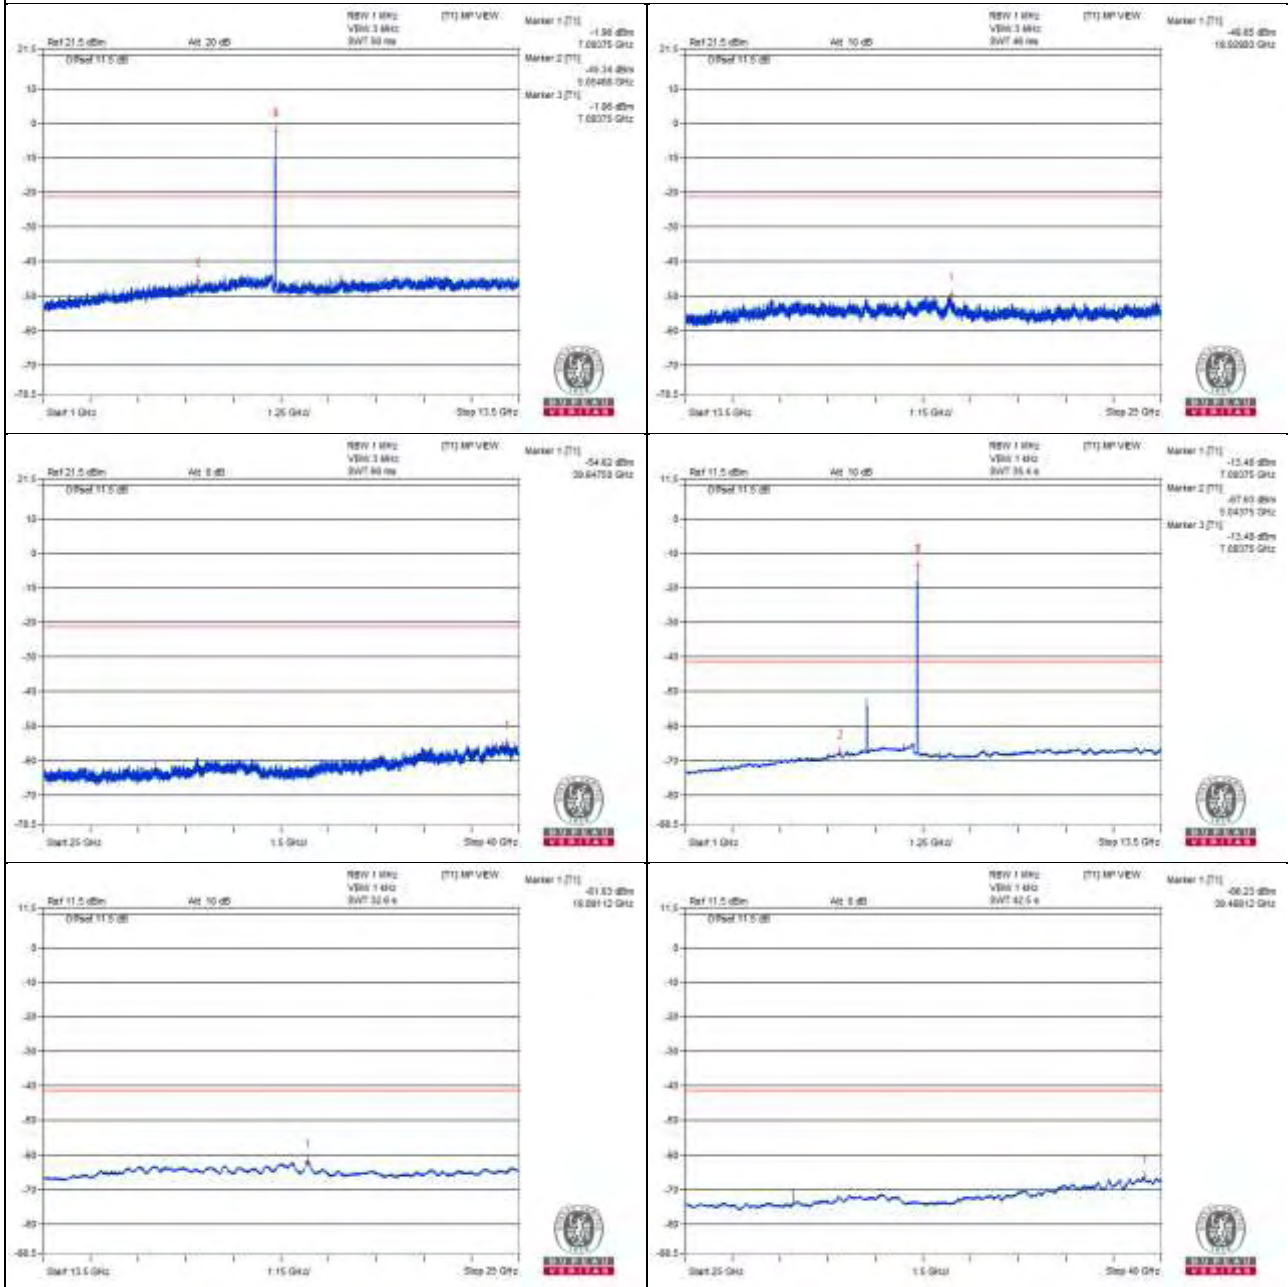

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	7218.15 PK	60.28	88.2	-27.92	-44.77	-48.08	8.13	-34.98
2	7209 AV	47.28	68.2	-20.92	-59.09	-59.15	8.13	-47.98

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

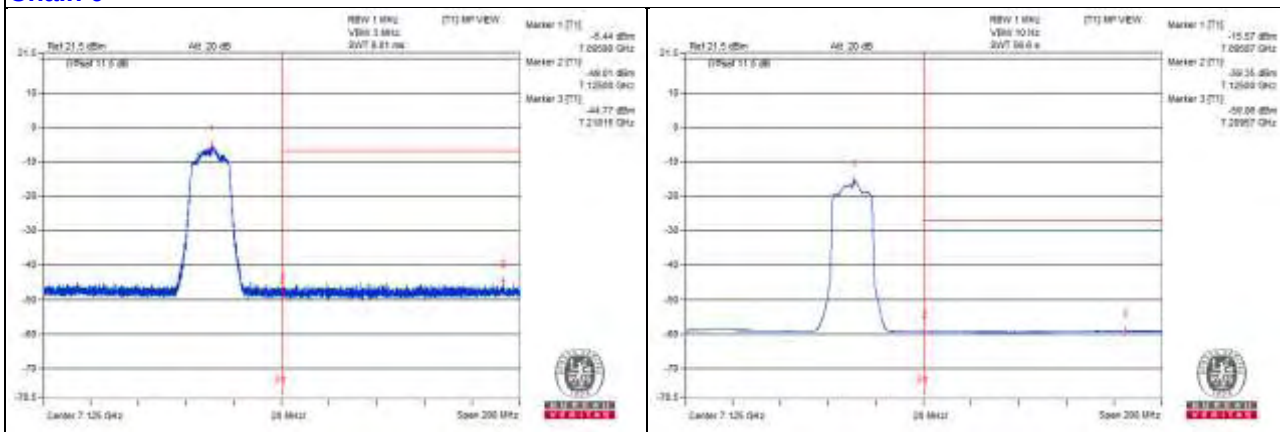

Chain 1

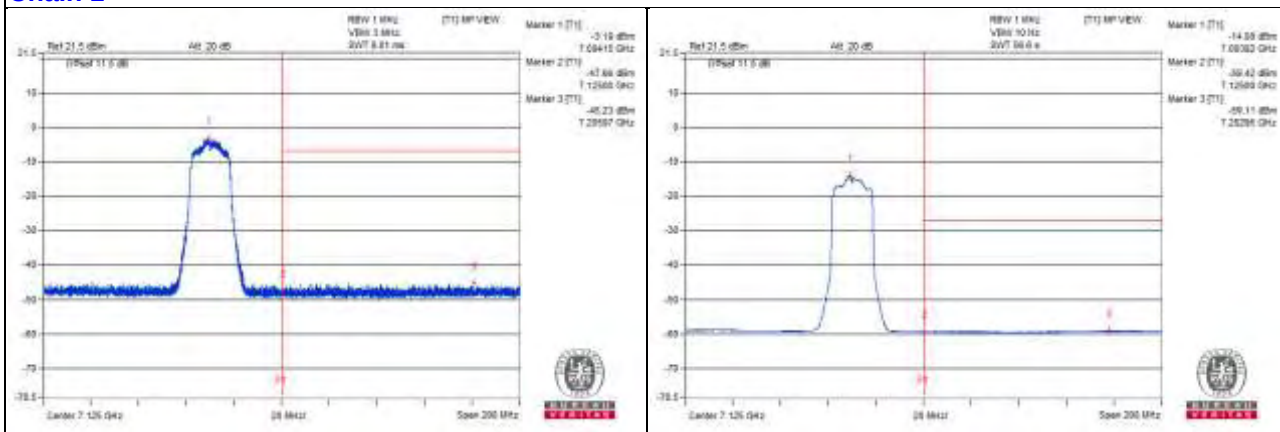

802.11a - Channel 233

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	14230.25 PK	51.01	88.2	-37.19	-55.61	-55.26	8.17	-44.25
2	14228.81 AV	40.41	68.2	-27.79	-66.16	-65.9	8.17	-54.85
3	21335.81 PK	52.23	74	-21.77	-53.34	-55.3	8.17	-43.03
4	21348.75 AV	41.51	54	-12.49	-64.83	-65.03	8.17	-53.75

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

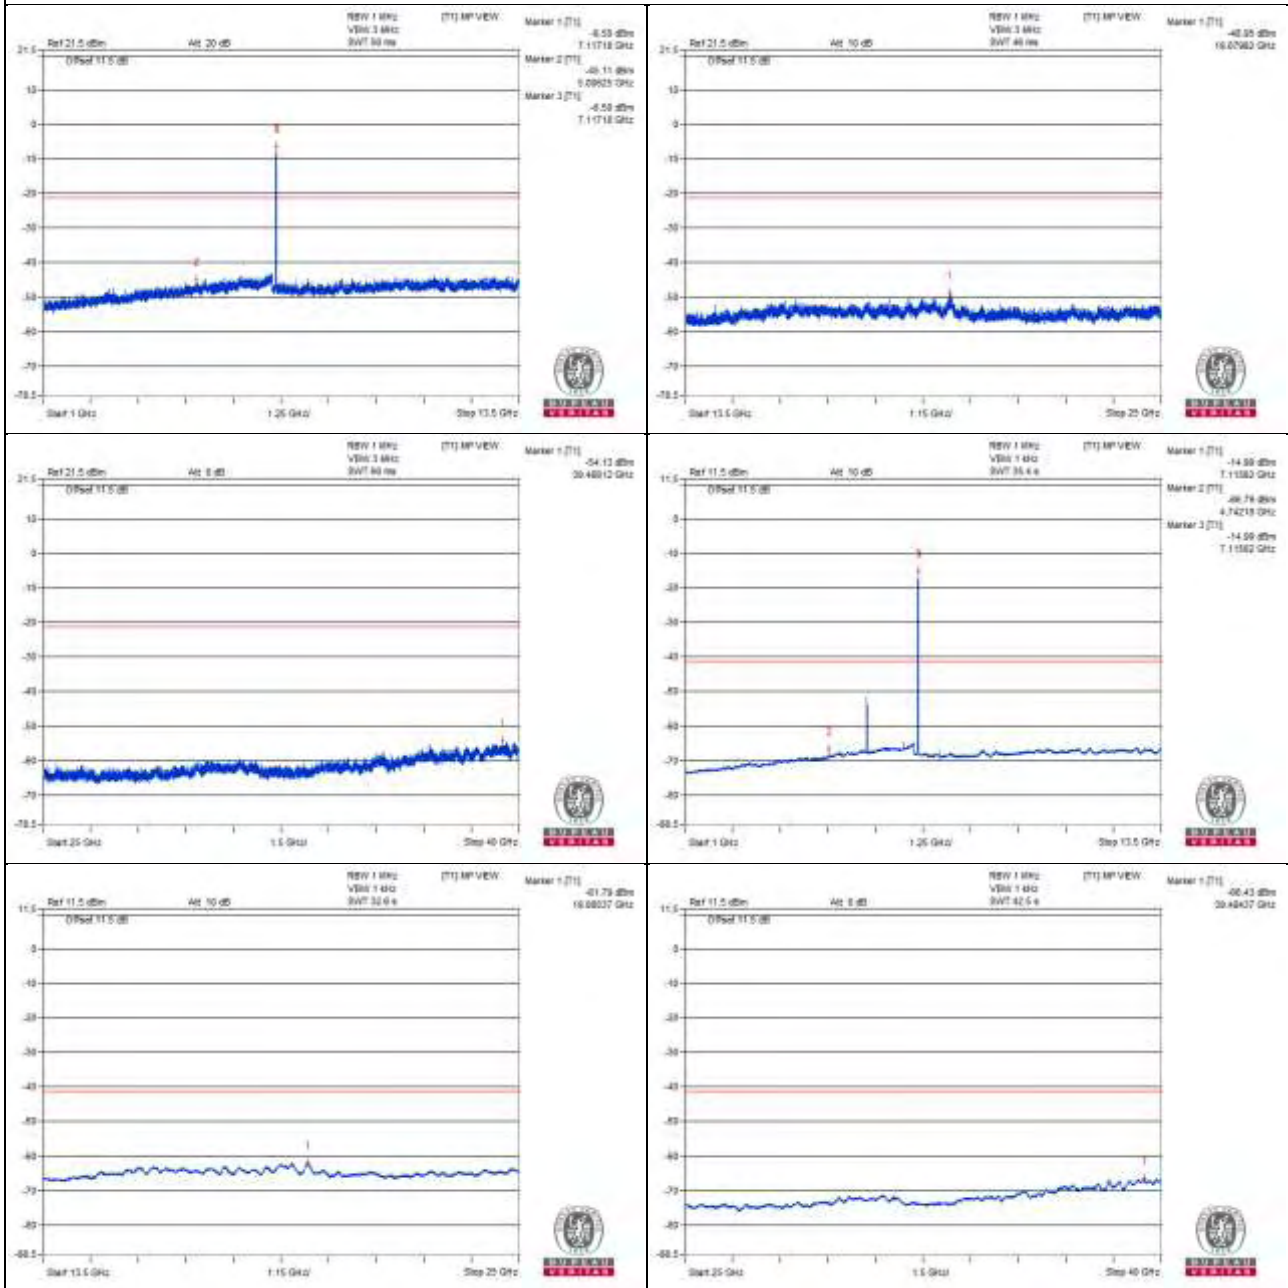

Chain 1

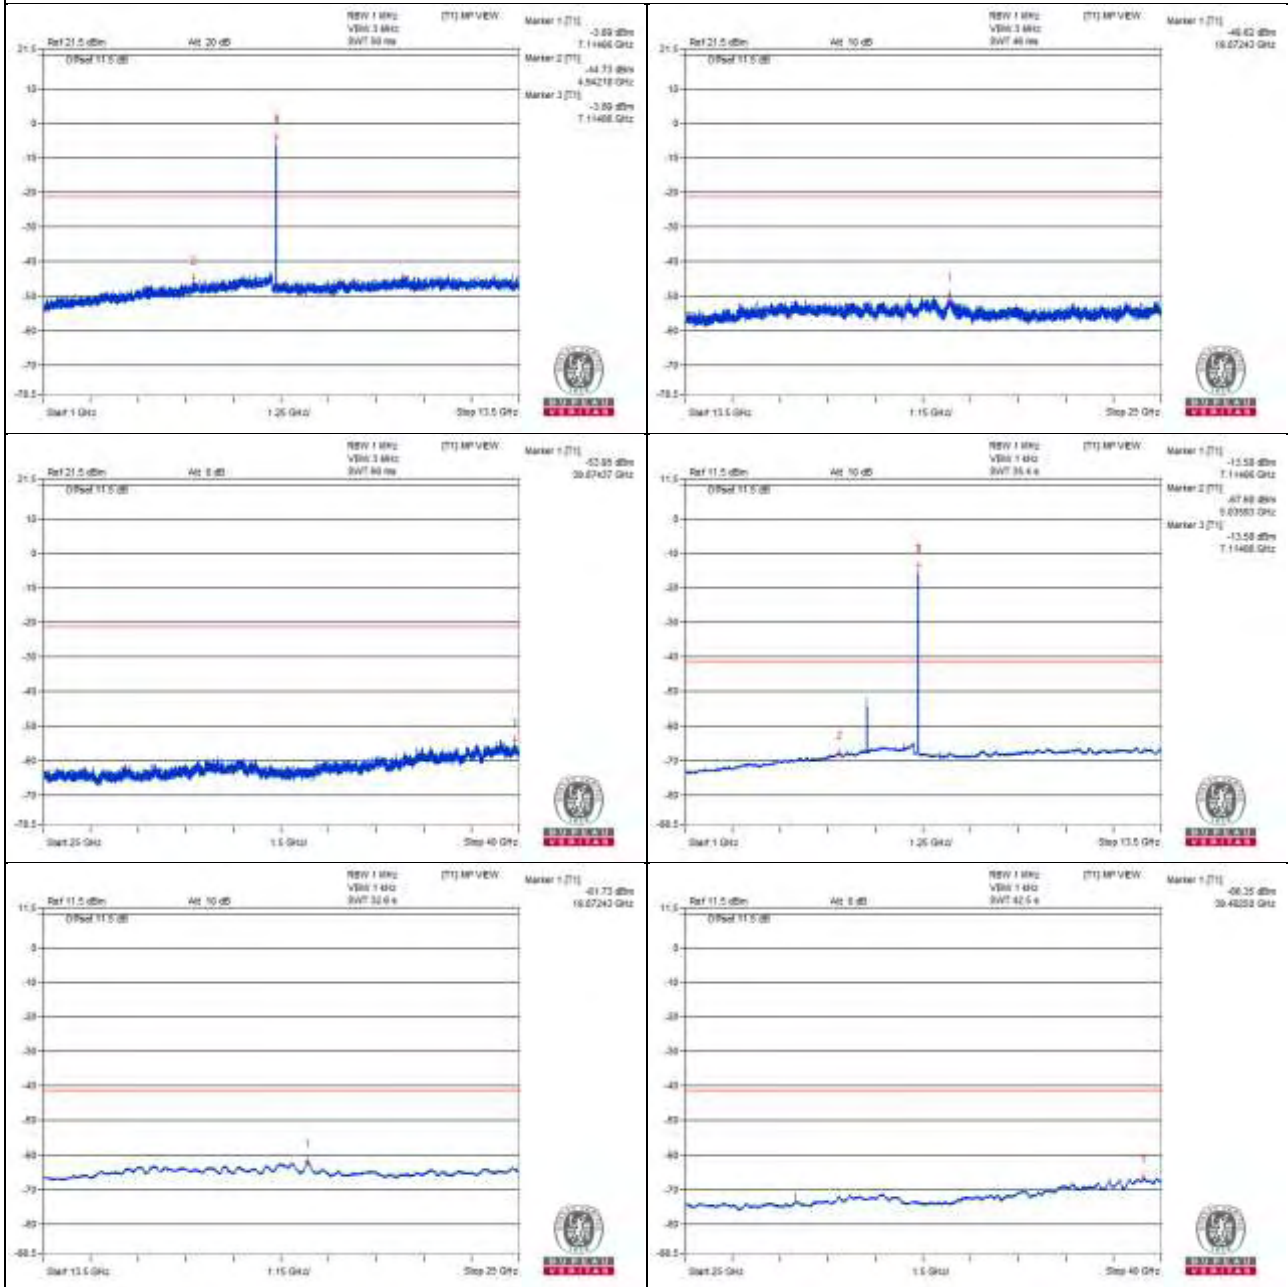

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	7125 PK	77.62	88.2	-10.58	-30.15	-27.74	8.13	-17.64
2	7125 AV	58.71	68.2	-9.49	-48.76	-46.83	8.13	-36.55

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

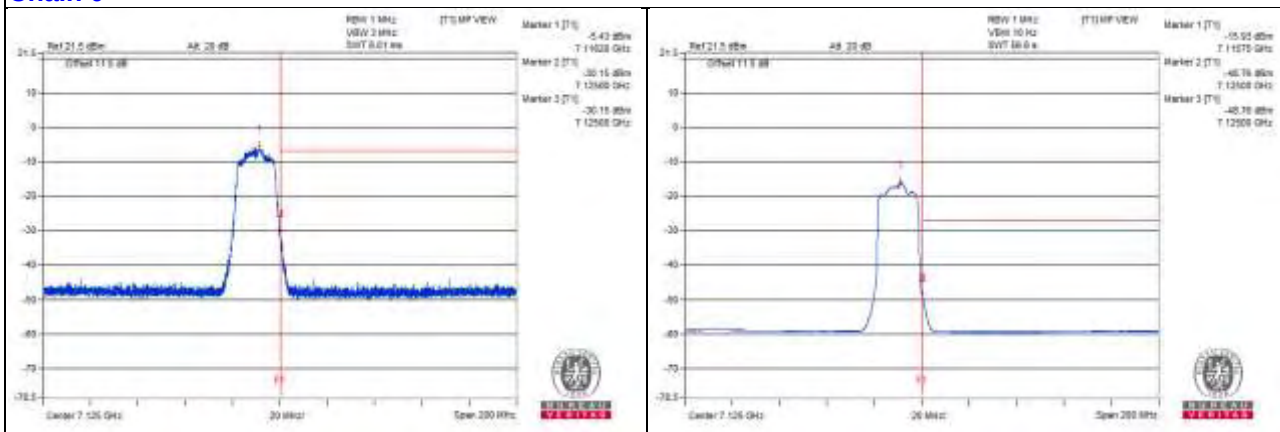

Chain 1

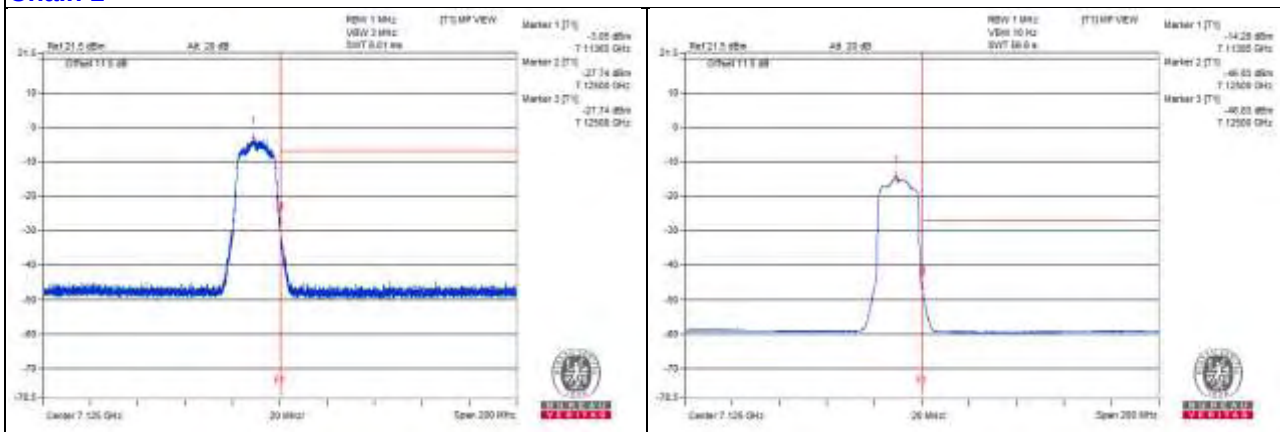

802.11ax (HE20) - Channel 2

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	11868.75 PK	60.57	74	-13.43	-46.19	-45.57	8.17	-34.69
2	11873.43 AV	38.88	54	-15.12	-67.57	-67.56	8.17	-56.38
3	17813.93 PK	52.96	74	-21.04	-53.92	-53.08	8.17	-42.3
4	17811.06 AV	42.32	54	-11.68	-63.97	-64.28	8.17	-52.94

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

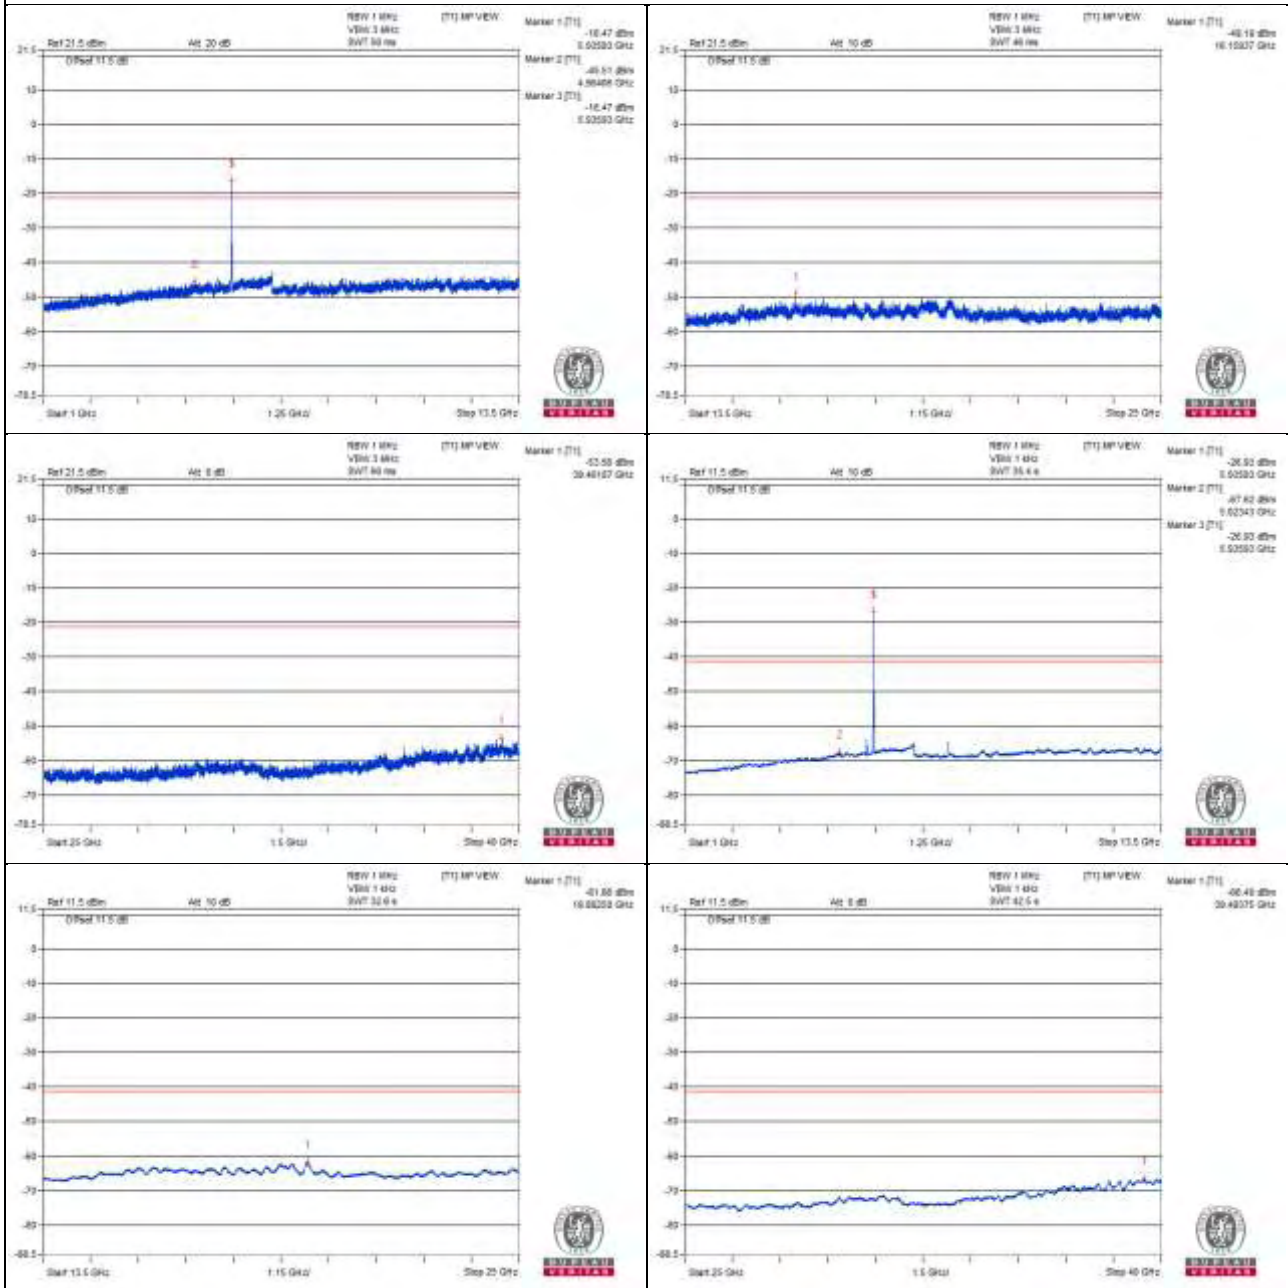

Chain 1

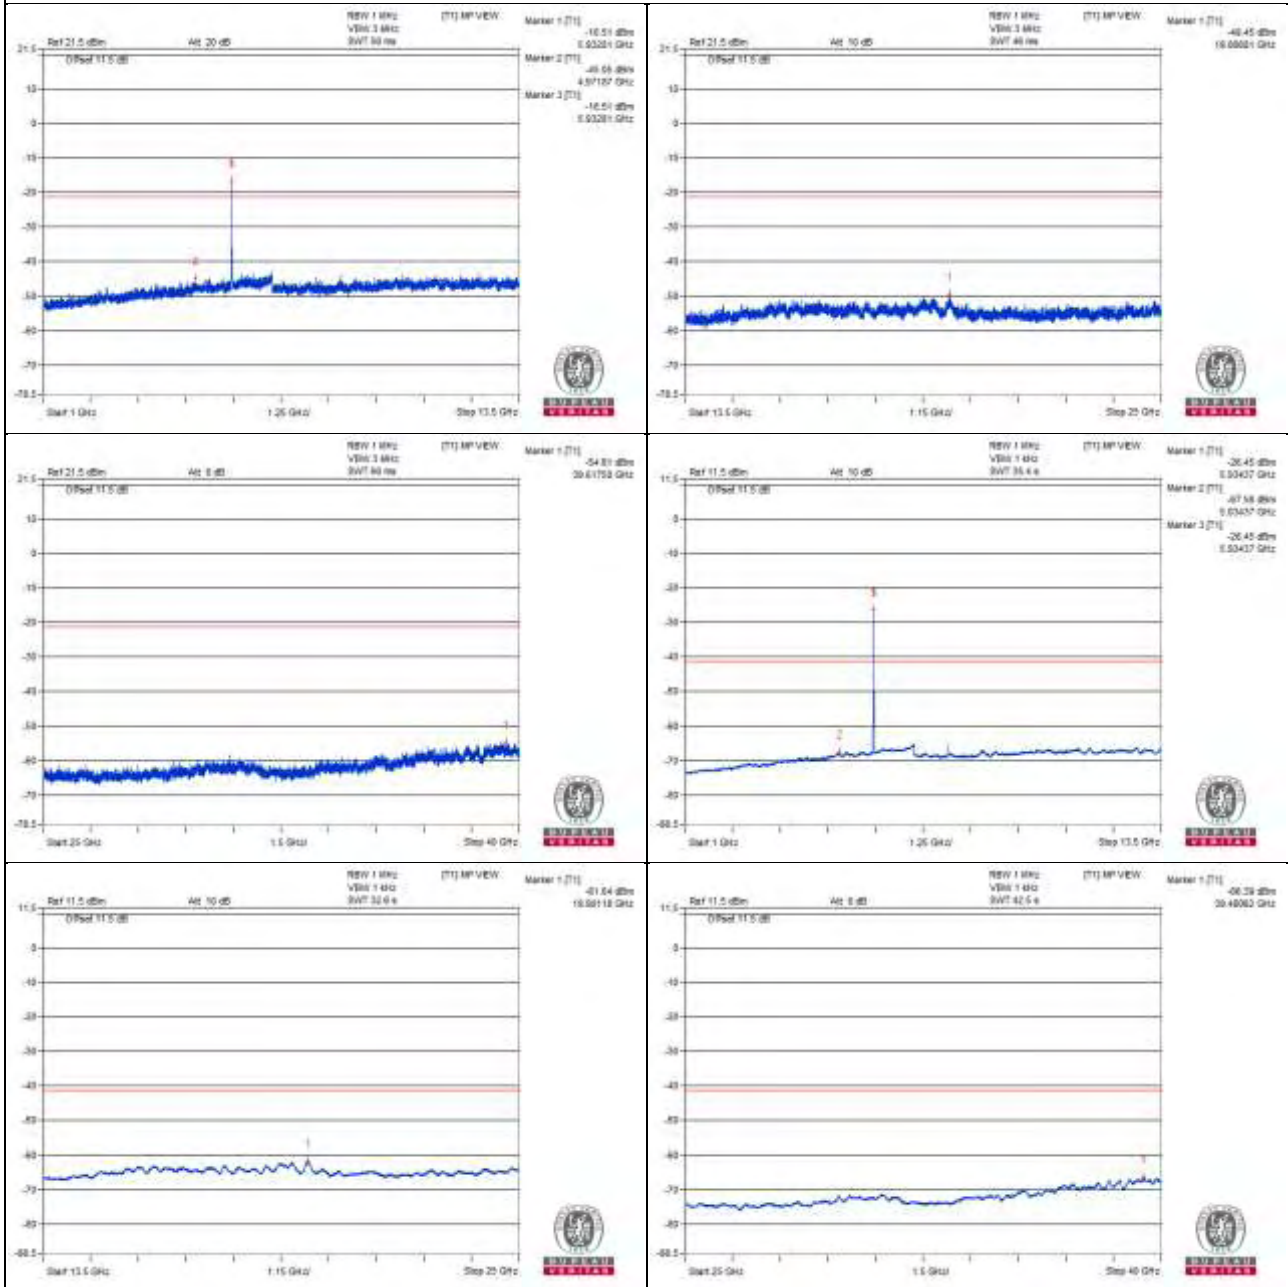

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5924.97 PK	77.65	88.2	-10.55	-28.62	-28.93	8.15	-17.61
2	5925 AV	67.05	68.2	-1.15	-39.41	-39.33	8.15	-28.21

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

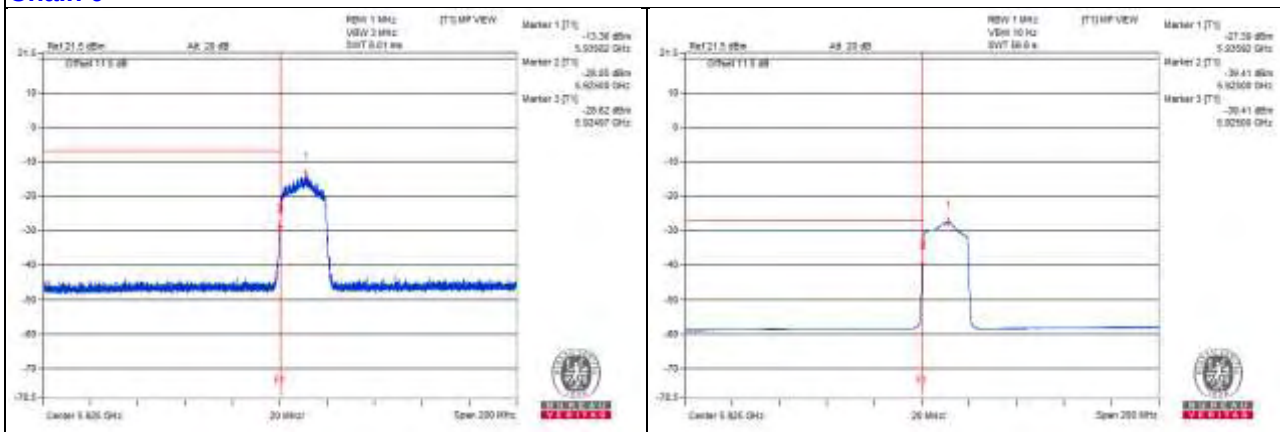

Chain 1

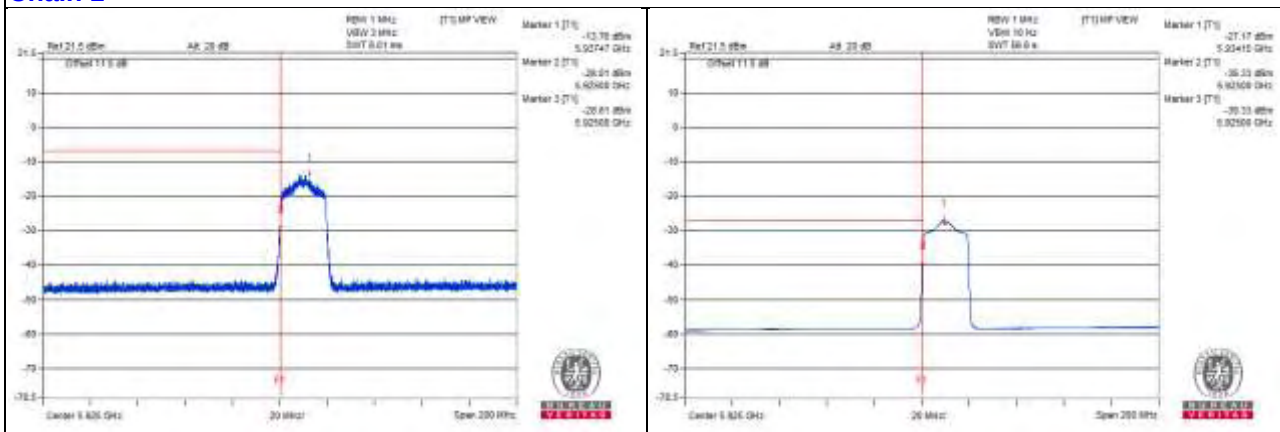

802.11ax (HE20) - Channel 1

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	11917.18 PK	60.21	74	-13.79	-45.91	-46.58	8.17	-35.05
2	11907.81 AV	38.99	54	-15.01	-67.4	-67.5	8.17	-56.27
3	17858.5 PK	53.99	74	-20.01	-52.55	-52.36	8.17	-41.27
4	17857.06 AV	43.2	54	-10.8	-63.3	-63.18	8.17	-52.06

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

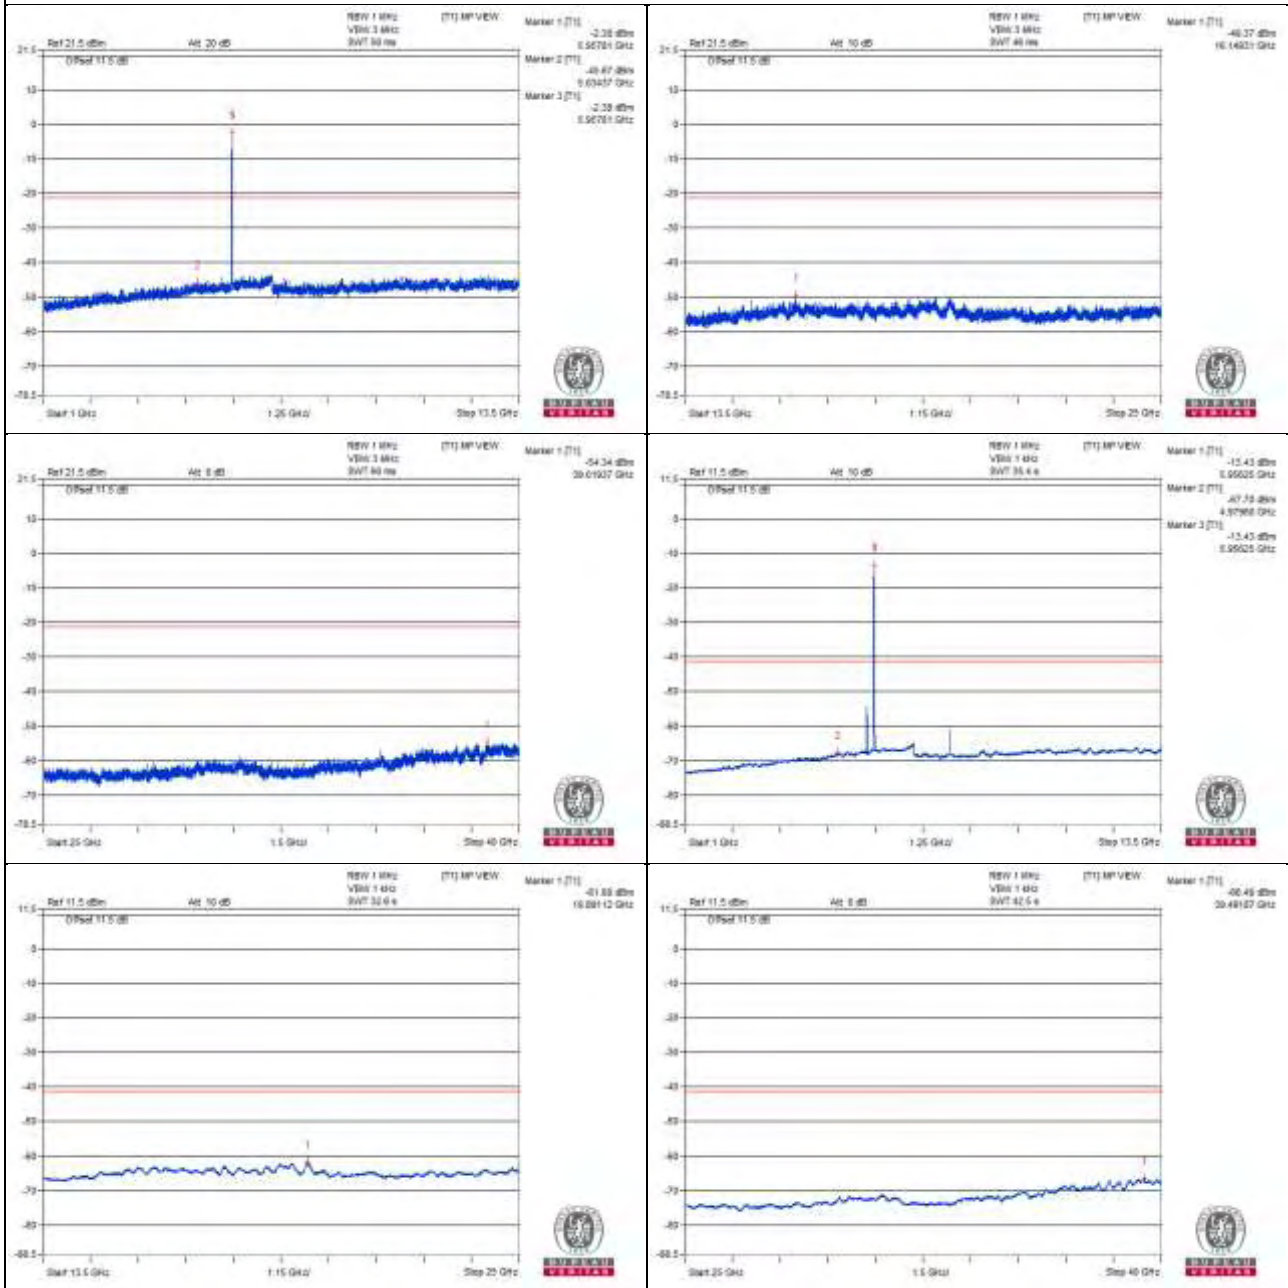

Chain 1

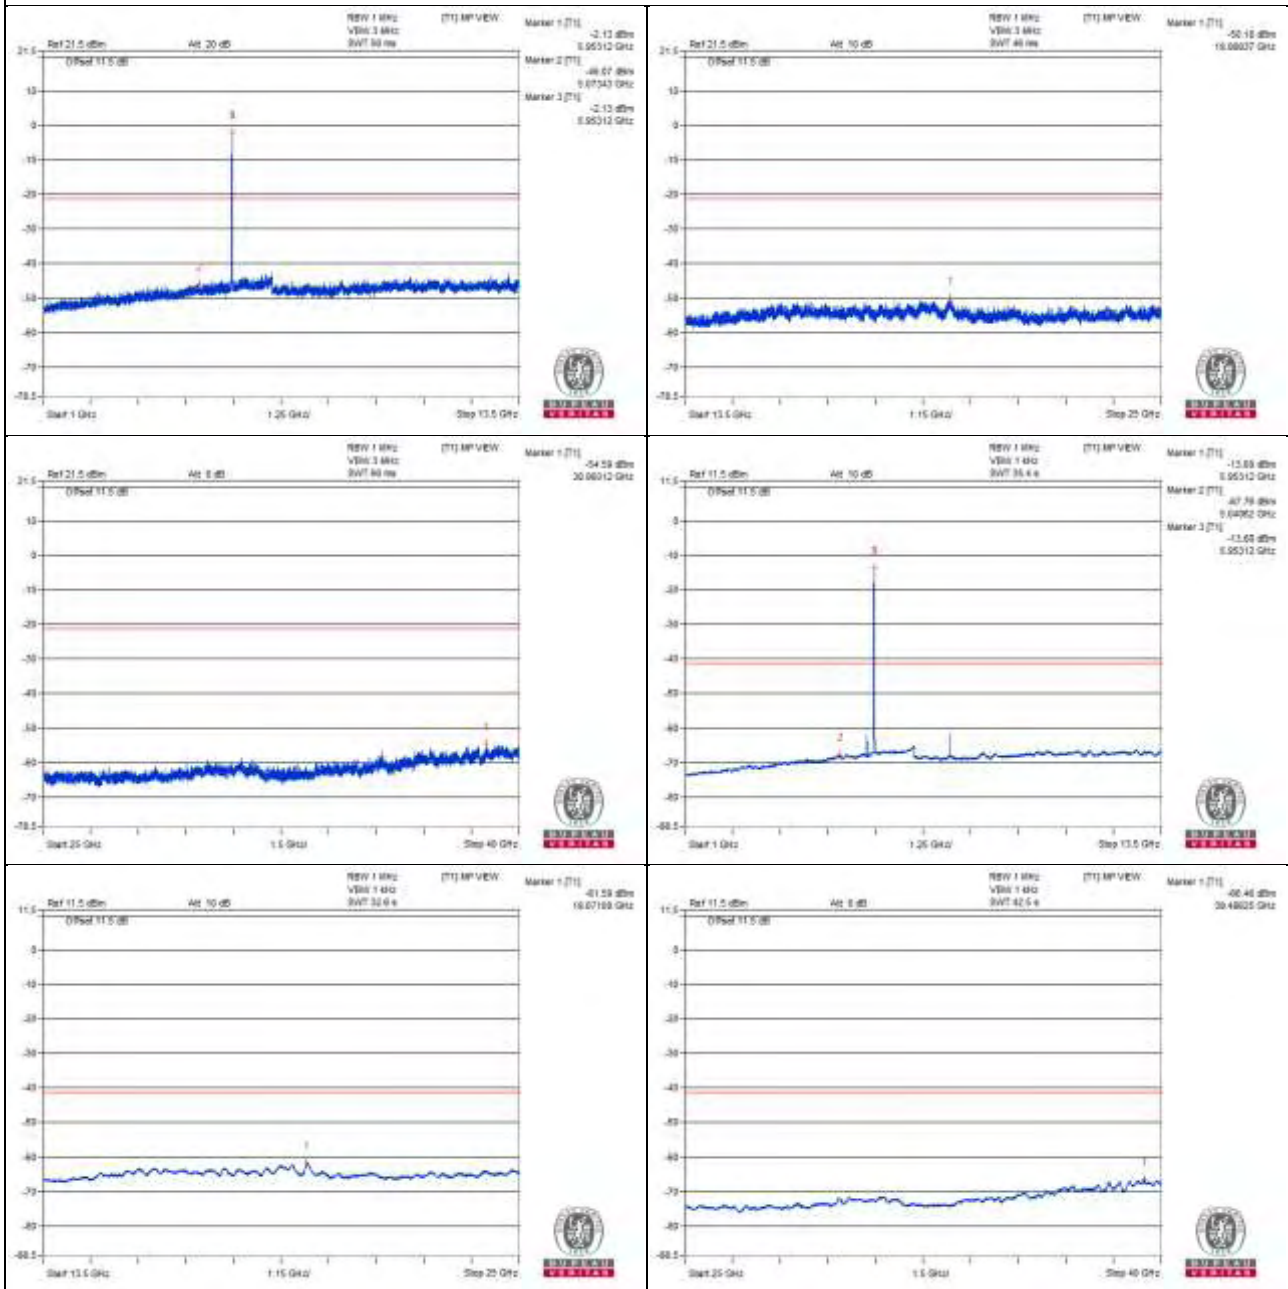

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5828.22 PK	61.69	88.2	-26.51	-43.47	-46.5	8.15	-33.57
2	5905.82 AV	48.06	68.2	-20.14	-58.33	-58.4	8.15	-47.2

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

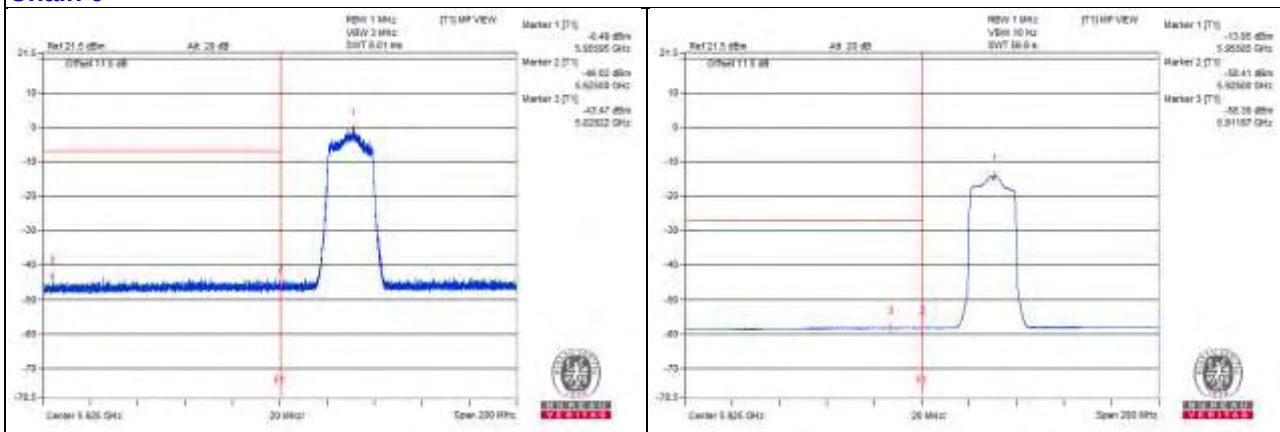

Chain 1

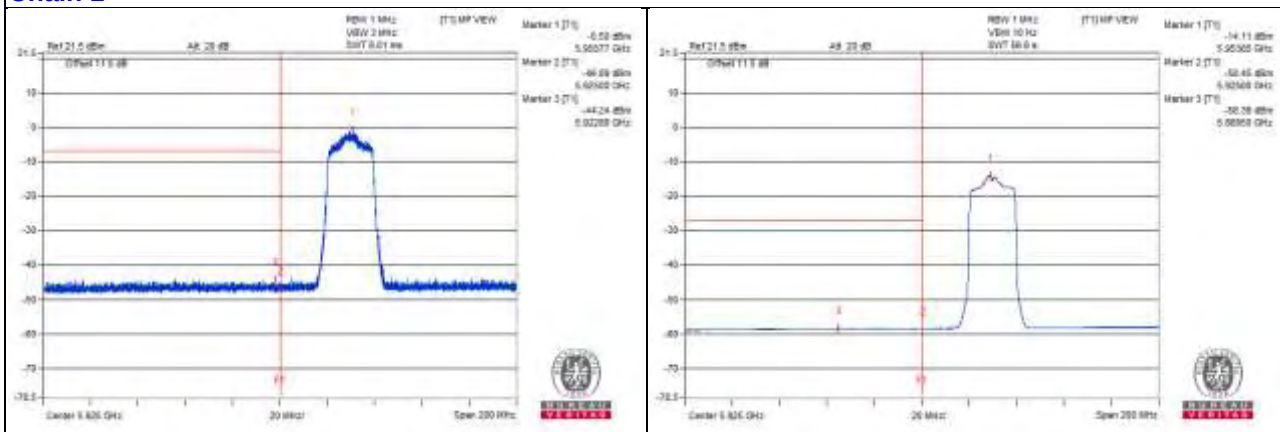

802.11ax (HE20) - Channel 45

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	12343.75 PK	60.82	74	-13.18	-44.52	-47.09	8.17	-34.44
2	12345.31 AV	39.32	54	-14.68	-66.94	-67.3	8.17	-55.94
3	18519.75 PK	52.93	74	-21.07	-54.73	-52.56	8.17	-42.33
4	18534.12 AV	42.38	54	-11.62	-64.07	-64.05	8.17	-52.88

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

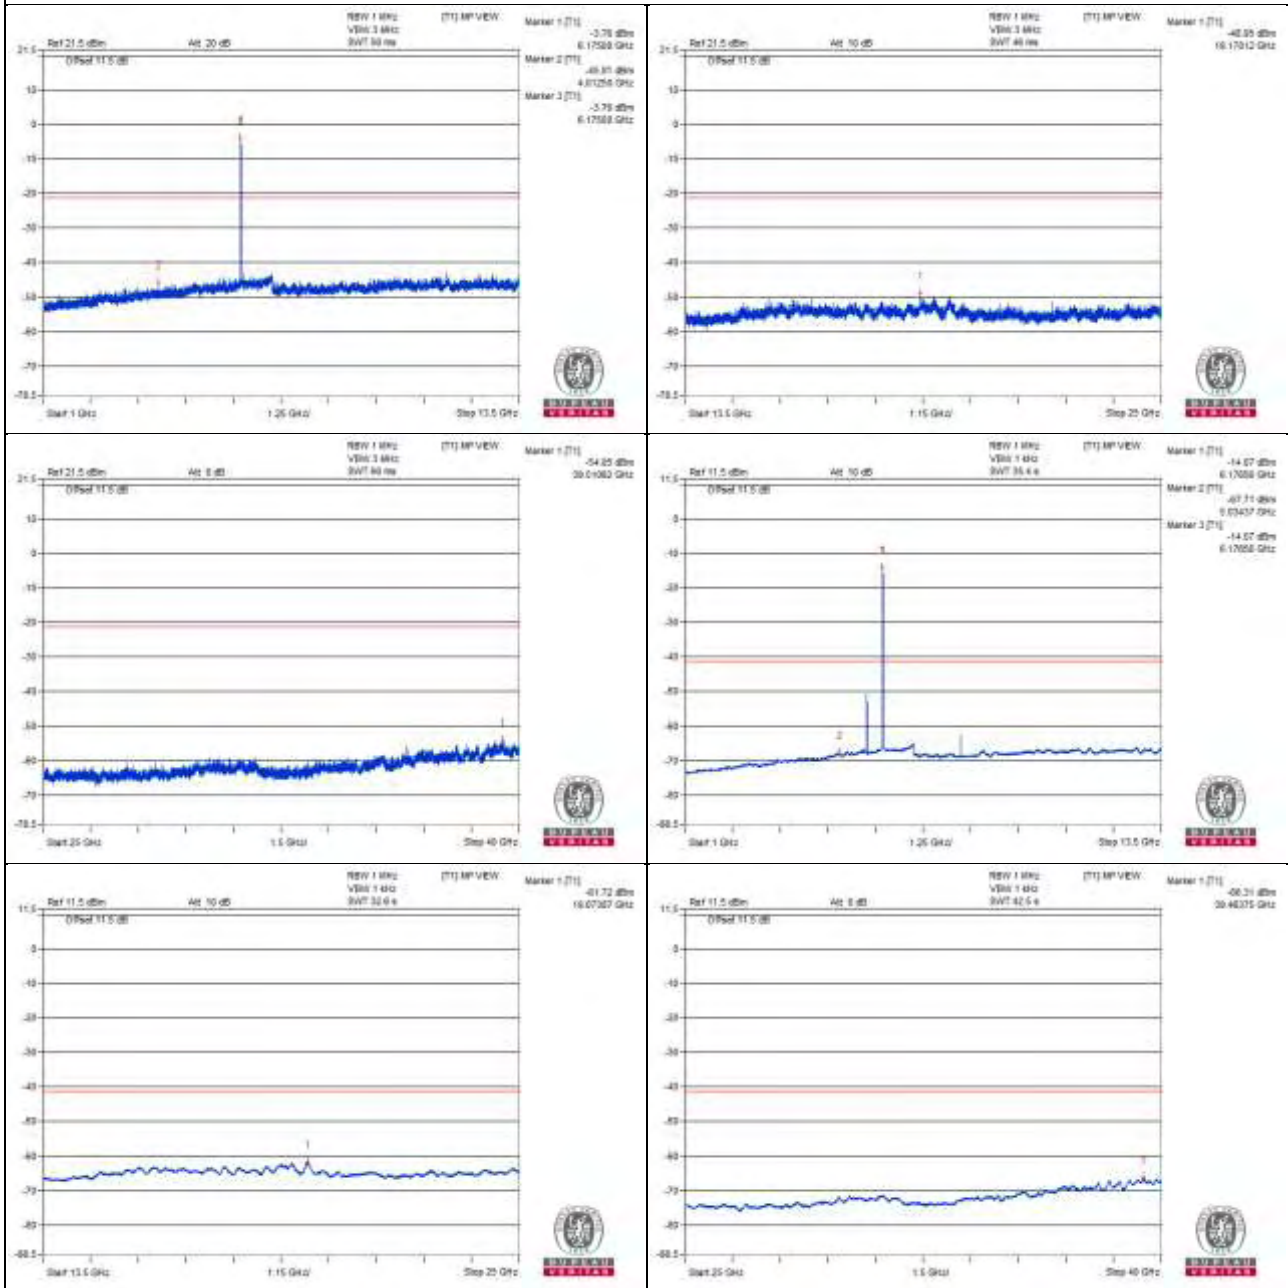

Chain 1

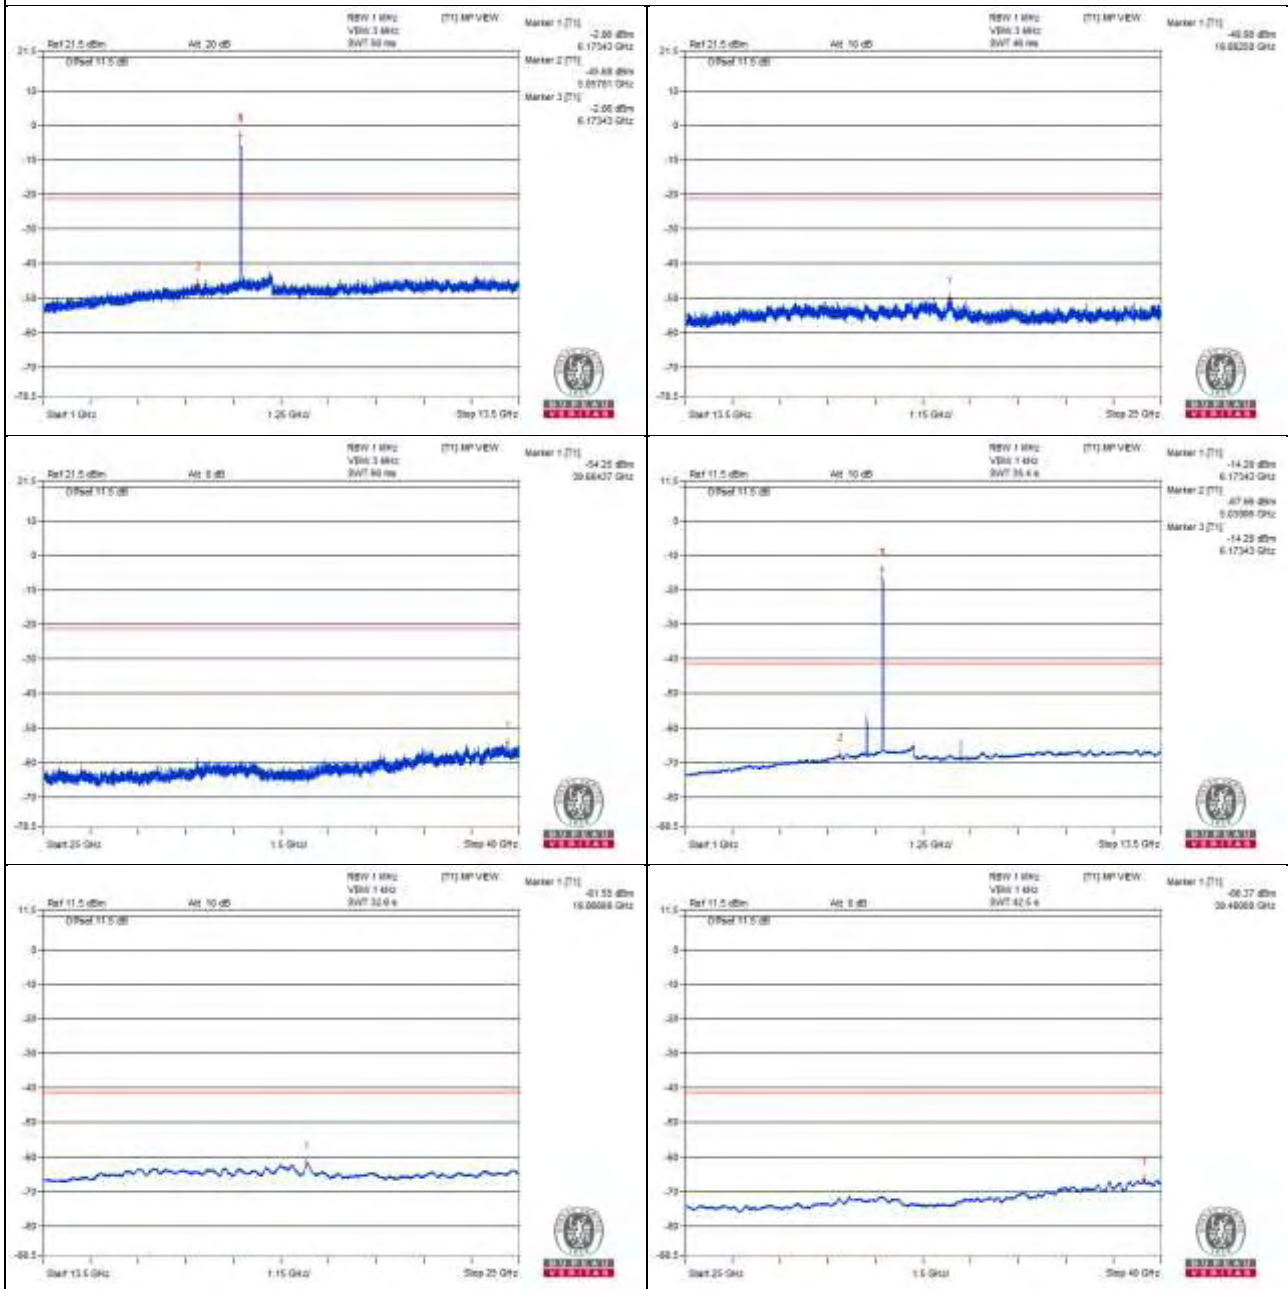

802.11ax (HE20) – Channel 93

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	12835.93 PK	61.49	88.2	-26.71	-44.79	-45.12	8.17	-33.77
2	12839.06 AV	39.85	68.2	-28.35	-66.62	-66.57	8.17	-55.41
3	19242.81 PK	55.07	74	-18.93	-50.75	-52.09	8.17	-40.19
4	19237.06 AV	43.89	54	-10.11	-62.39	-62.72	8.17	-51.37

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

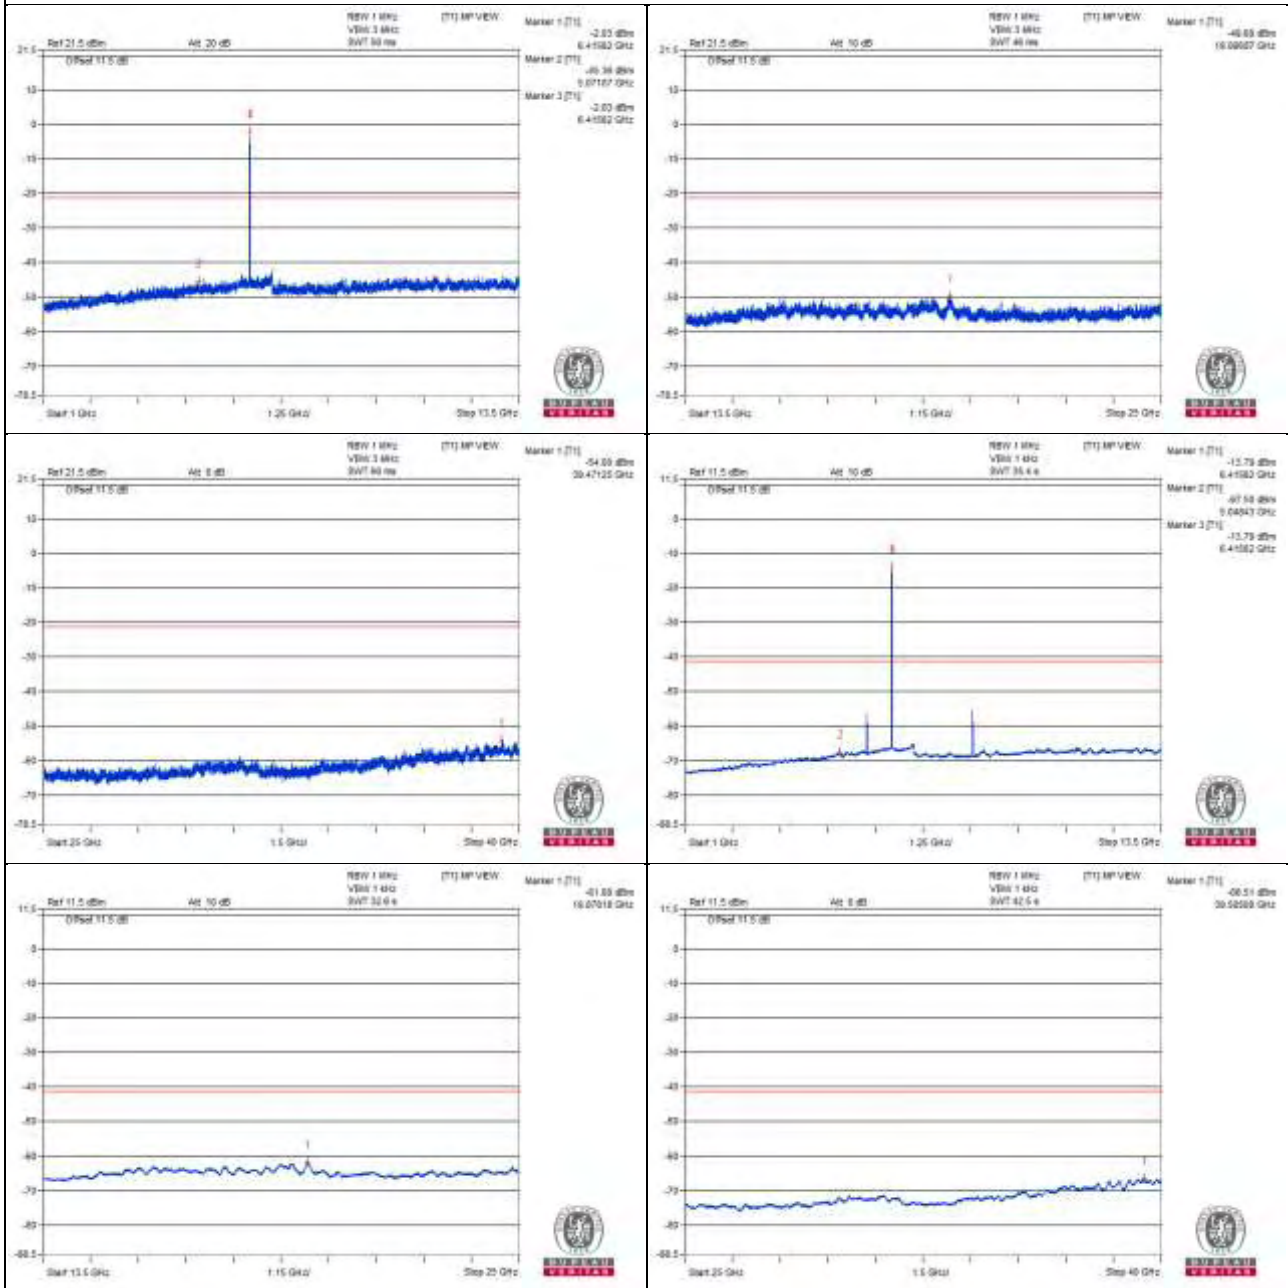

Chain 1

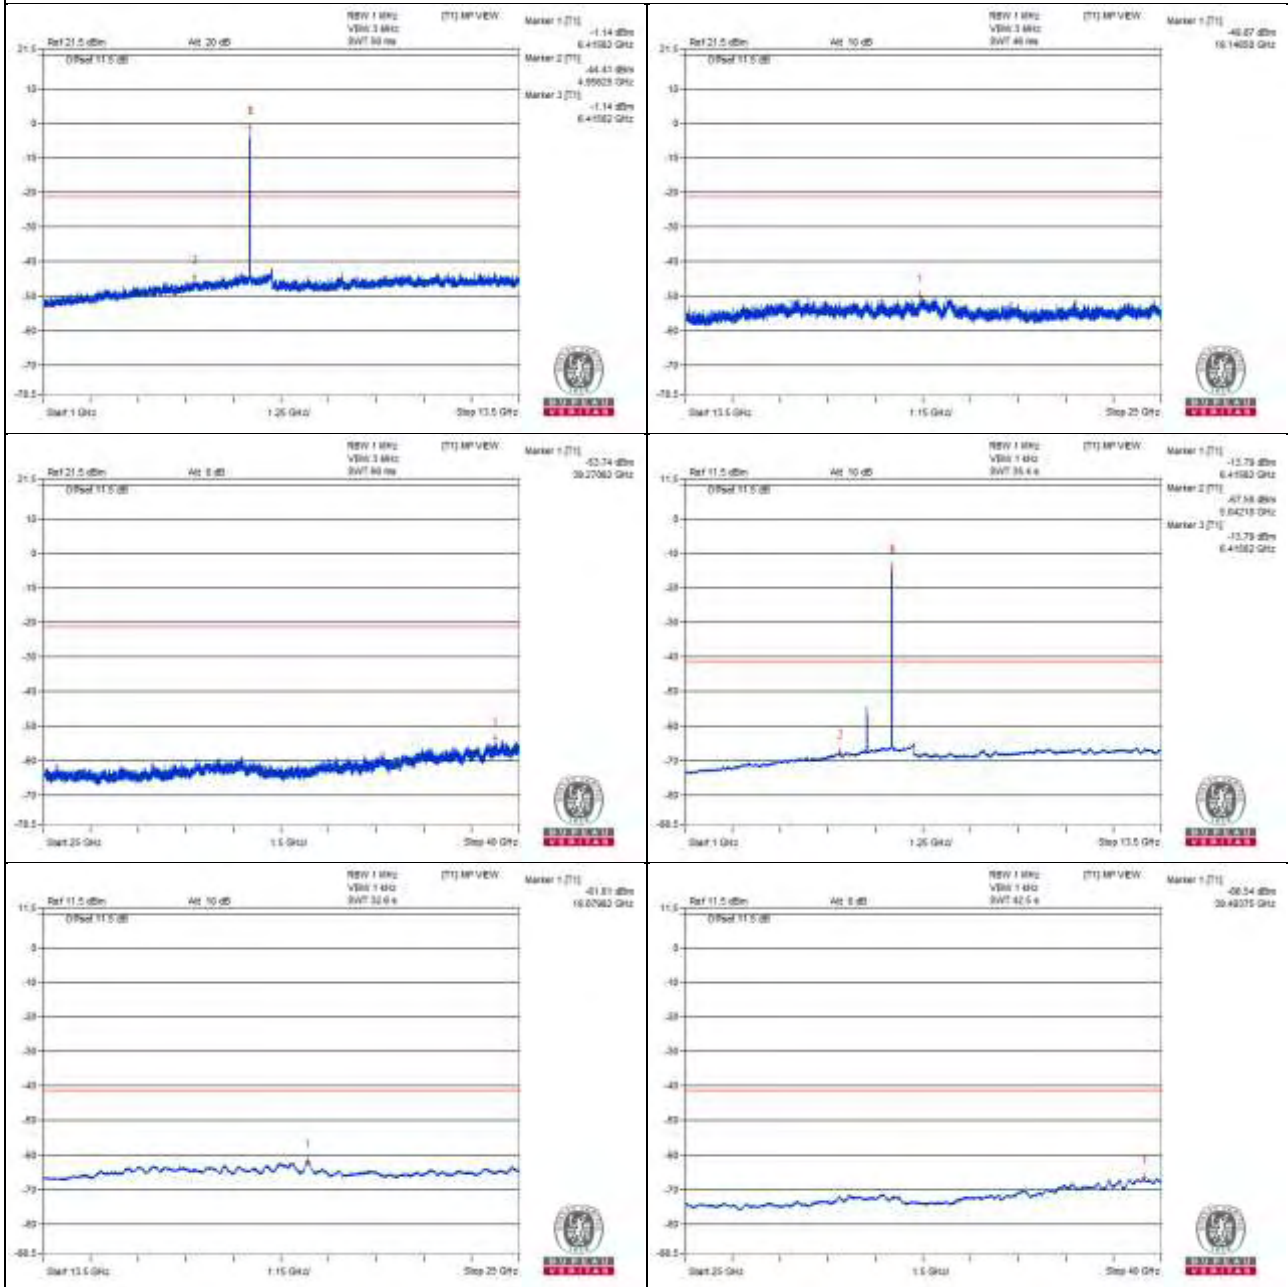

802.11ax (HE20) - Channel 97

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	12871.87 PK	61.43	88.2	-26.77	-44.57	-45.49	8.17	-33.83
2	12865.62 AV	40.17	68.2	-28.03	-66.16	-66.39	8.17	-55.09
3	19311.81 PK	54.27	74	-19.73	-52.68	-51.71	8.17	-40.99
4	19298.87 AV	43.56	54	-10.44	-62.83	-62.94	8.17	-51.7

Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

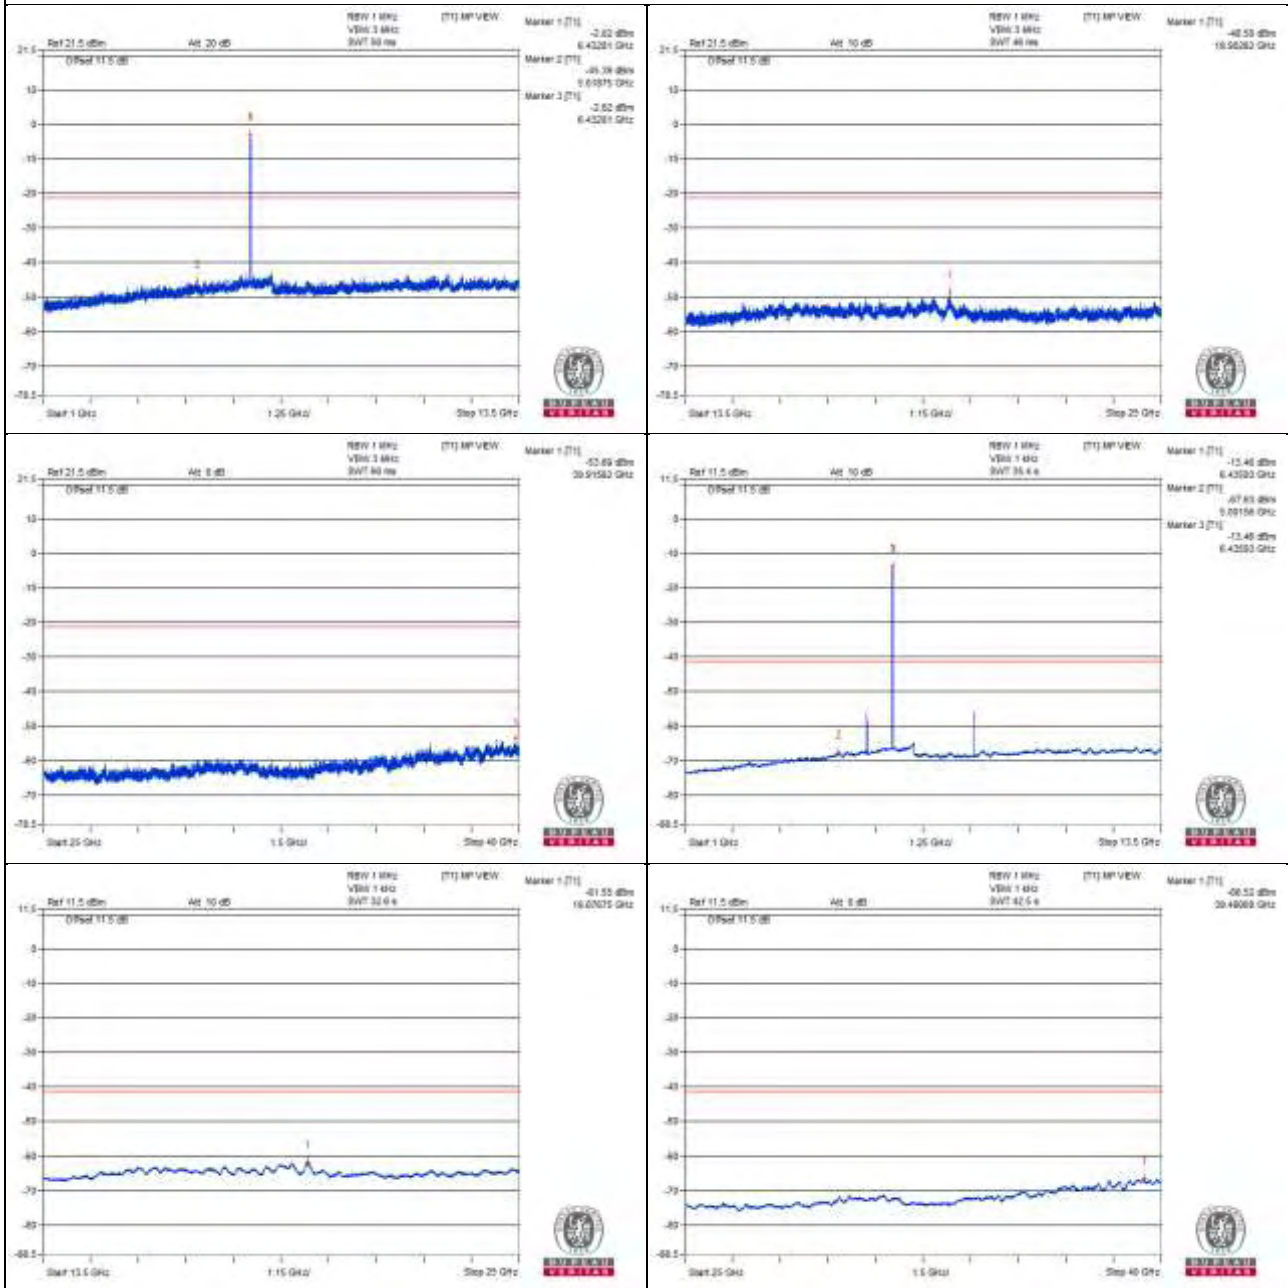

Chain 1

