

802.11ax (HE20) - Channel 105

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	12940.62 PK	60.3	88.2	-27.9	-46.04	-46.24	8.17	-34.96
2	12940.62 AV	39.13	68.2	-29.07	-67.44	-67.19	8.17	-56.13
3	19432.56 PK	53.68	74	-20.32	-53	-52.53	8.17	-41.58
4	19432.56 AV	43.06	54	-10.94	-63.2	-63.56	8.17	-52.2

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

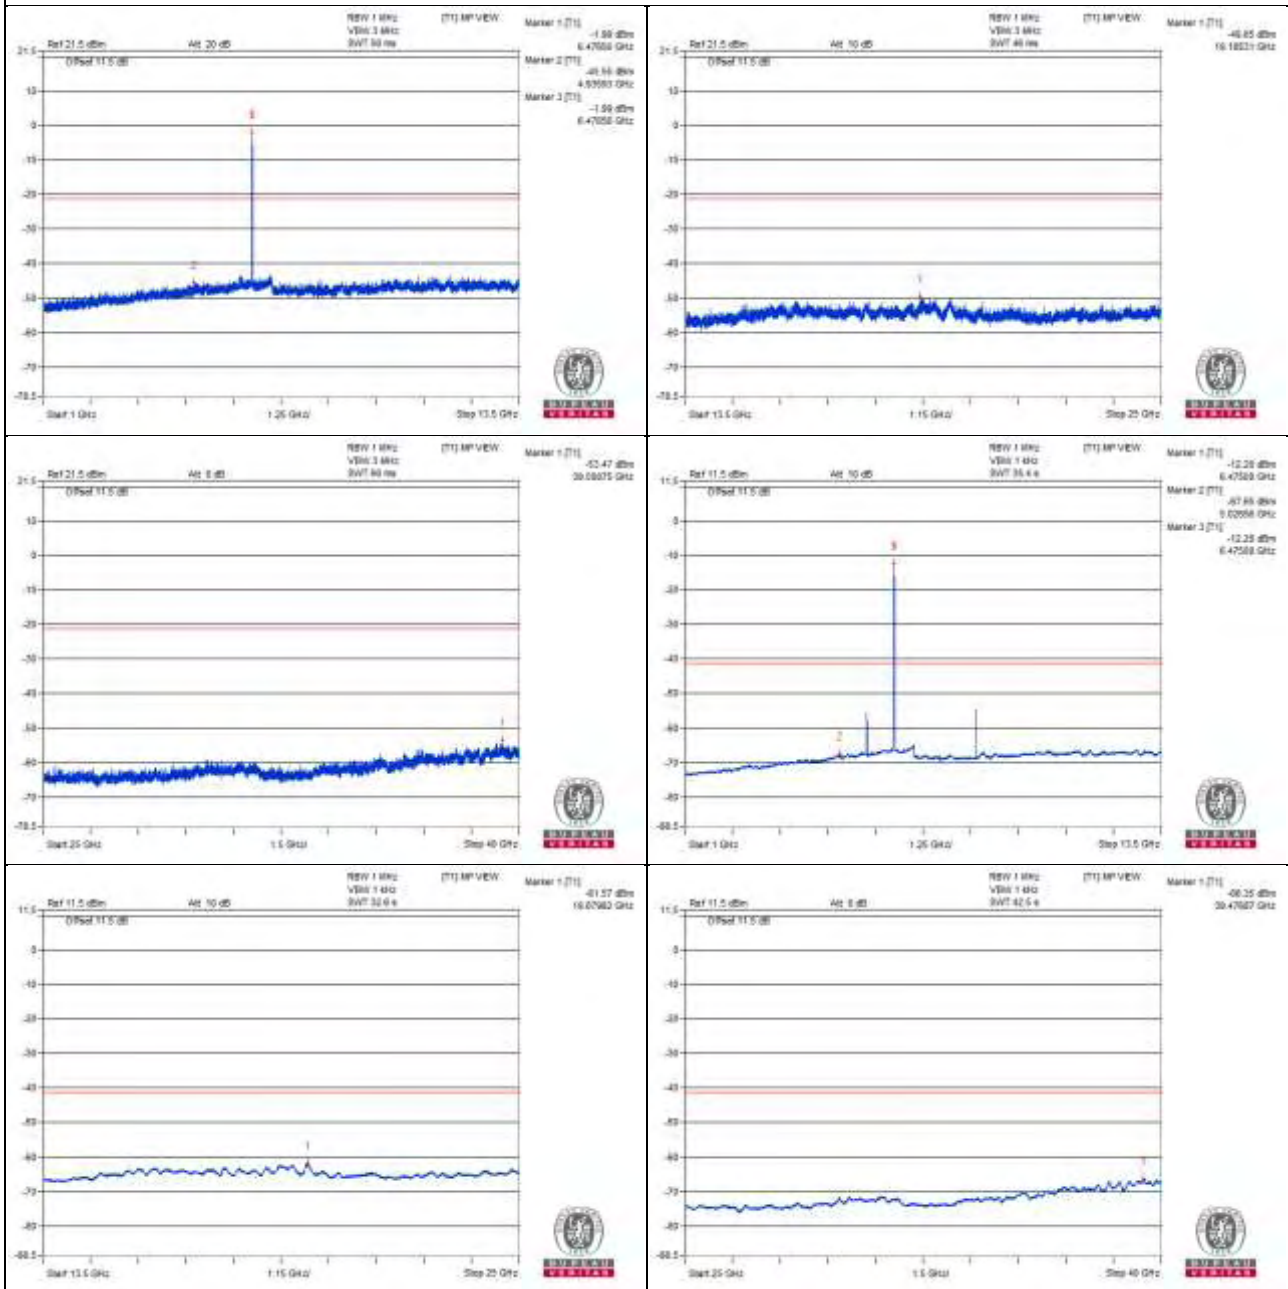

Chain 1

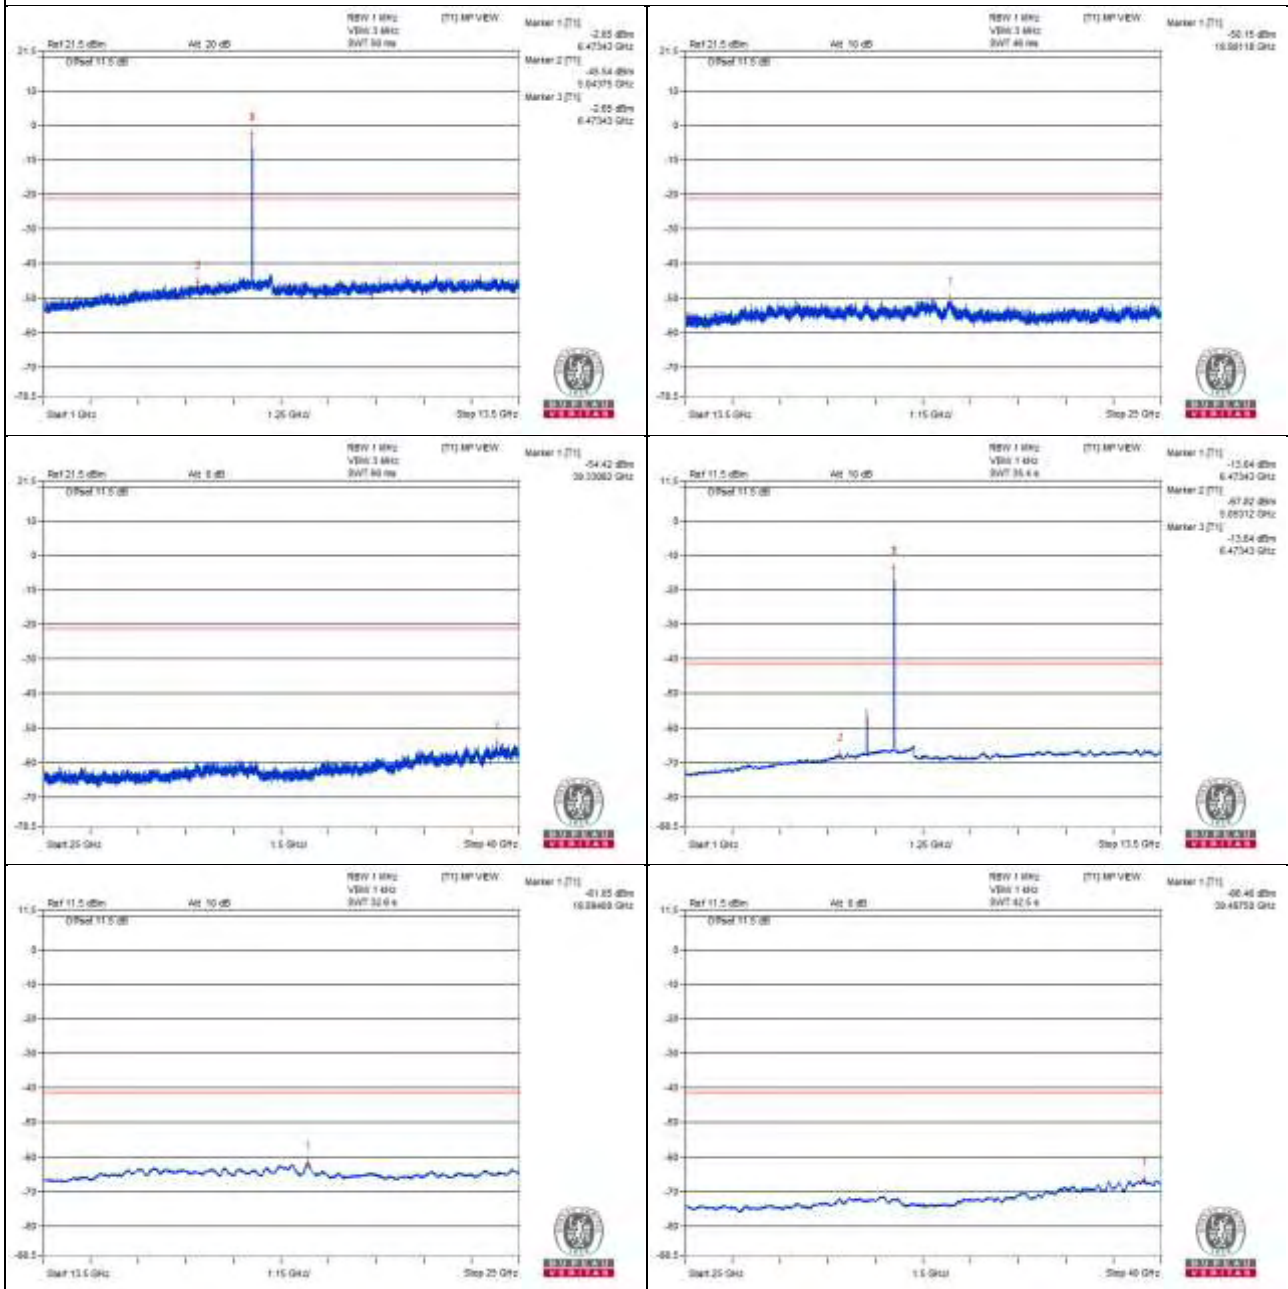

802.11ax (HE20) - Channel 113

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	13039.06 PK	61.08	88.2	-27.12	-45.78	-44.97	8.17	-34.18
2	13020.31 AV	39.4	68.2	-28.8	-67.13	-66.95	8.17	-55.86
3	19543.25 PK	55.68	74	-18.32	-50.98	-50.56	8.17	-39.58
4	19536.06 AV	44.06	54	-9.94	-62.2	-62.57	8.17	-51.2

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

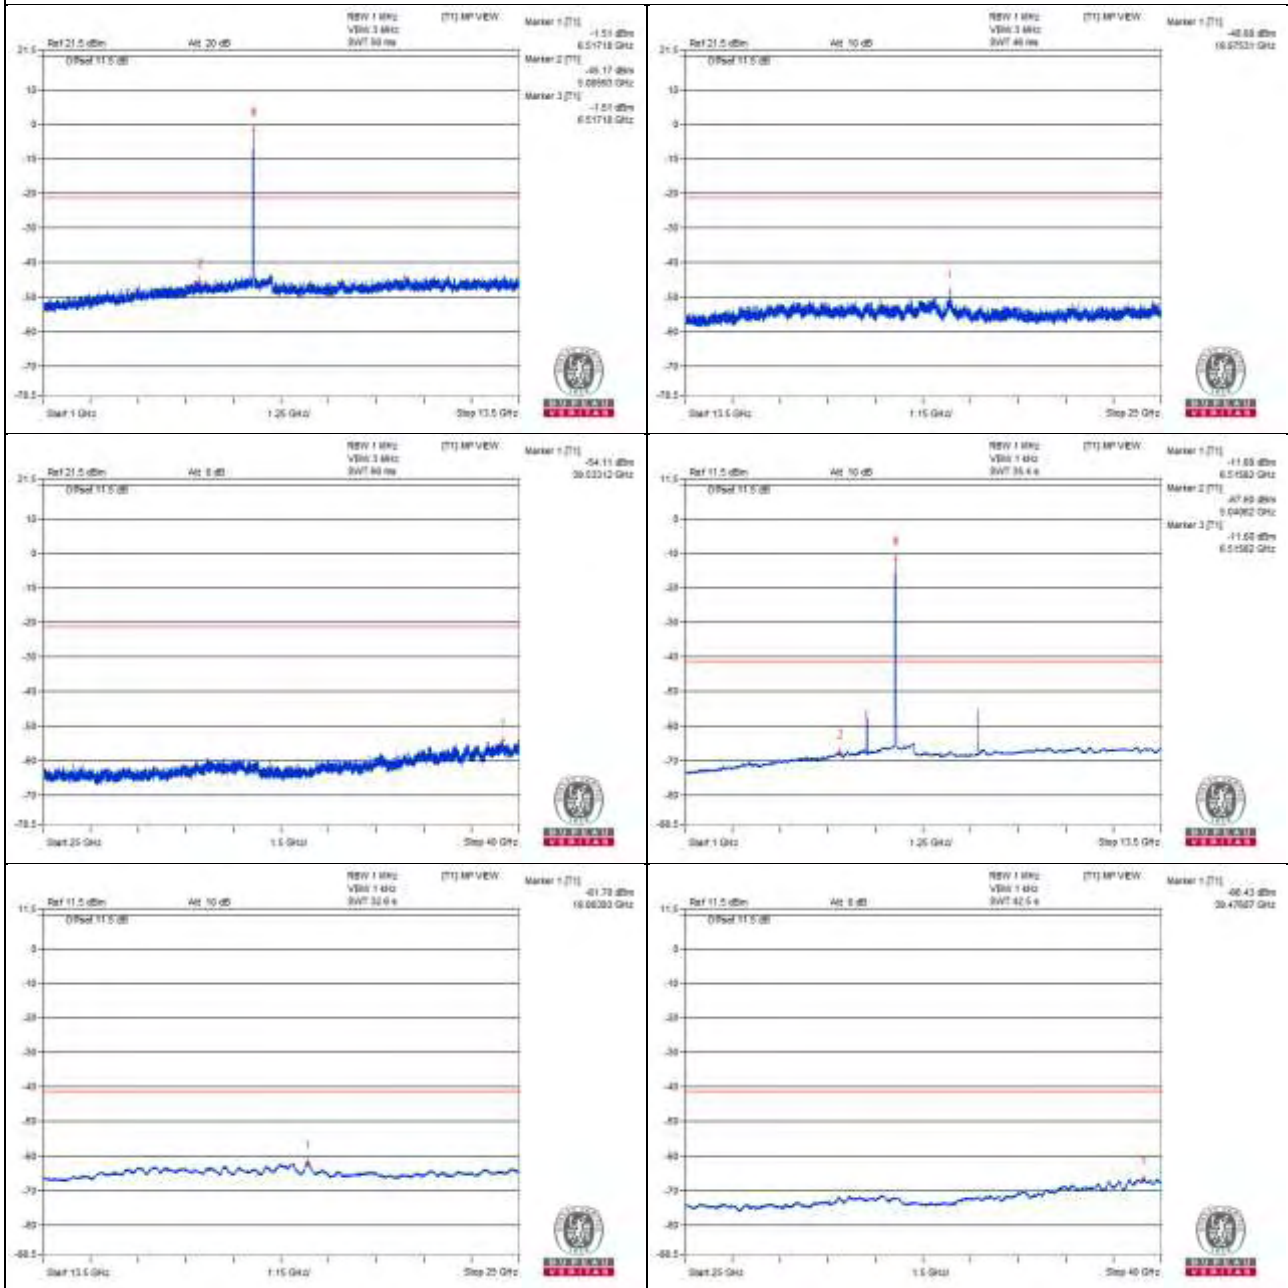

Chain 1

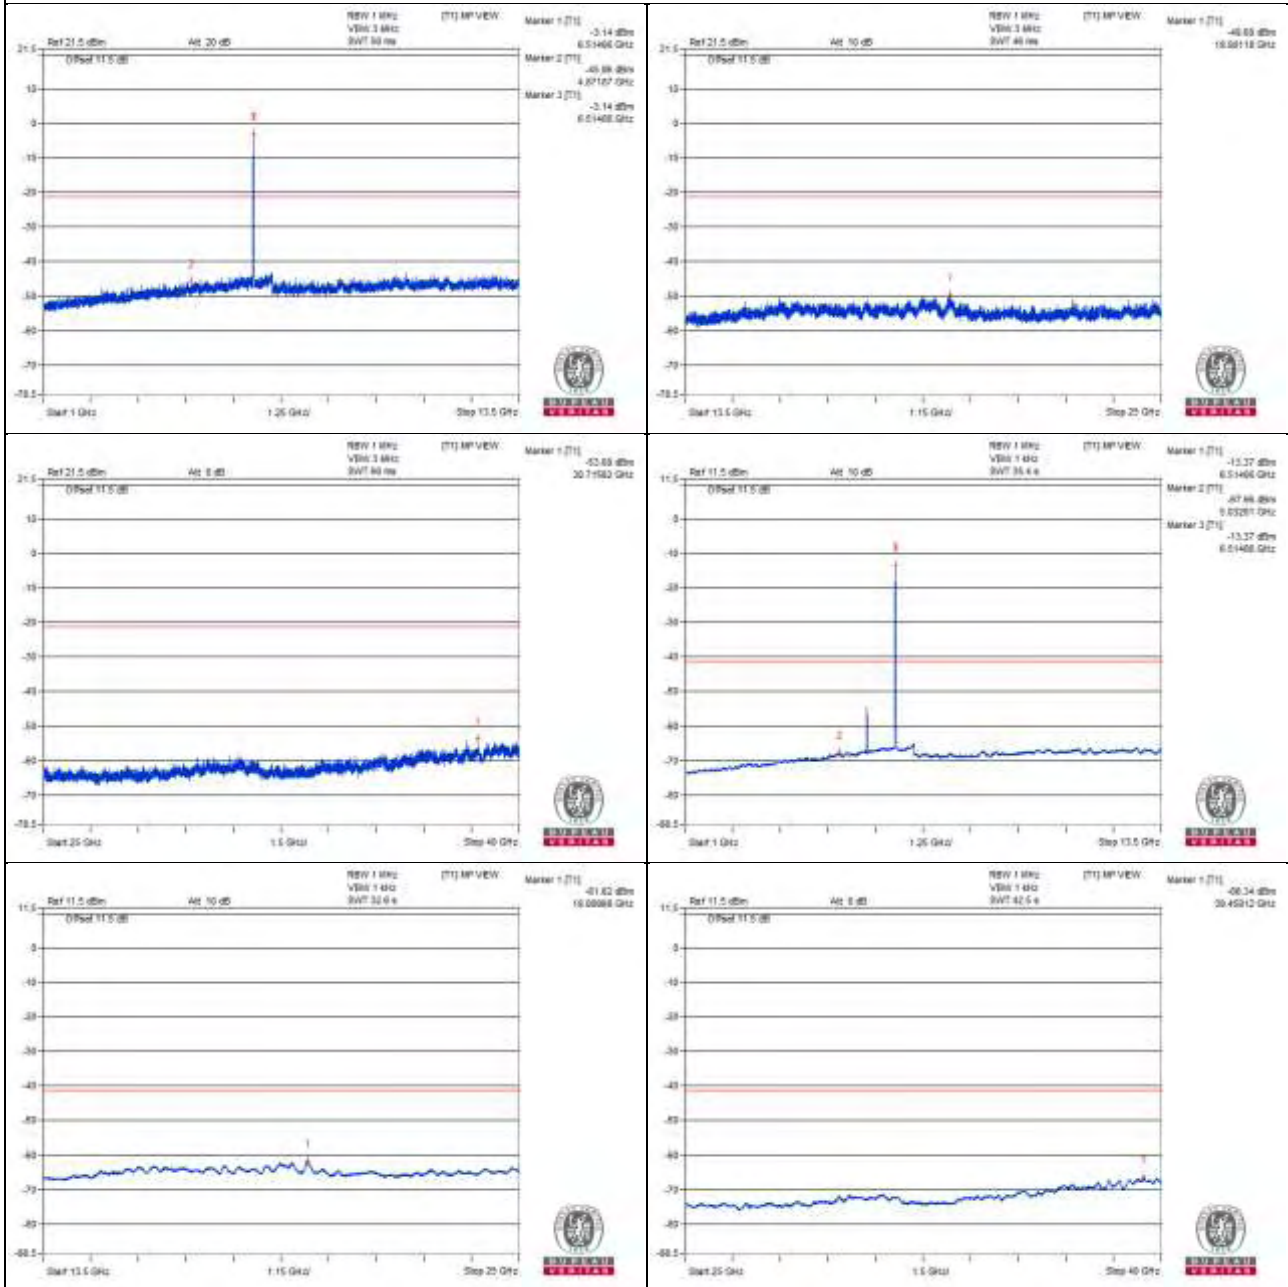

802.11ax (HE20) - Channel 117

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	13067.18 PK	60.72	88.2	-27.48	-45.29	-46.19	8.17	-34.54
2	13076.56 AV	39.54	68.2	-28.66	-66.91	-66.9	8.17	-55.72
3	19605.06 PK	52.93	74	-21.07	-53.98	-53.08	8.17	-42.33
4	19596.43 AV	42.75	54	-11.25	-63.64	-63.75	8.17	-52.51

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

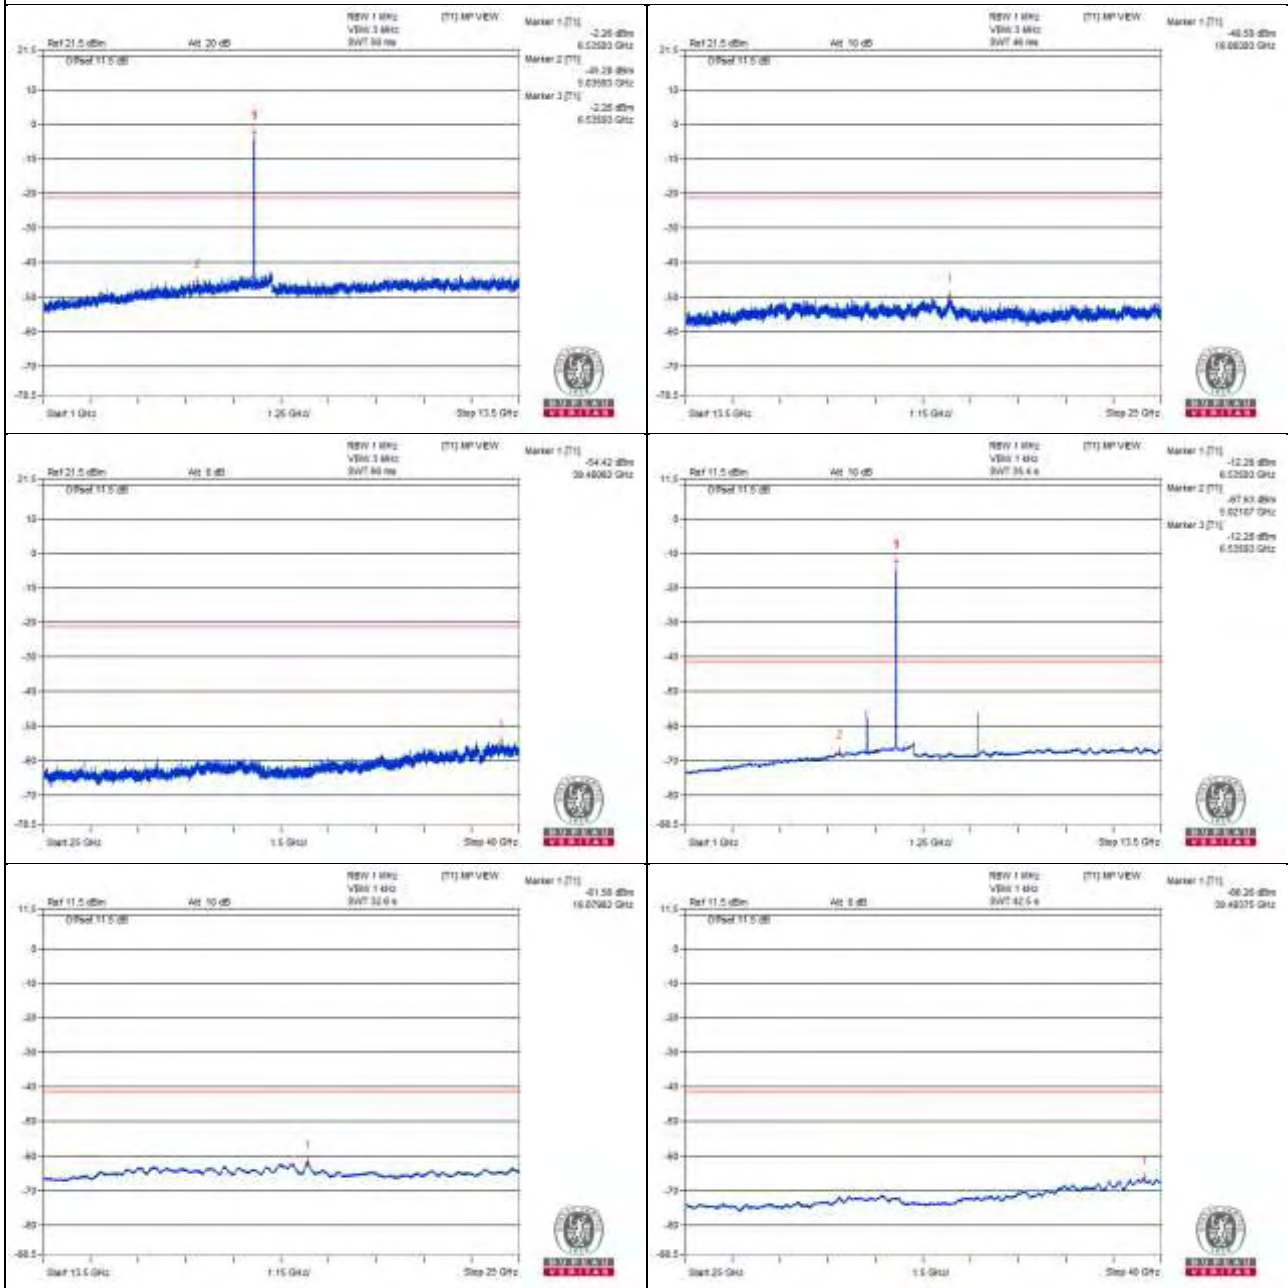

Chain 1

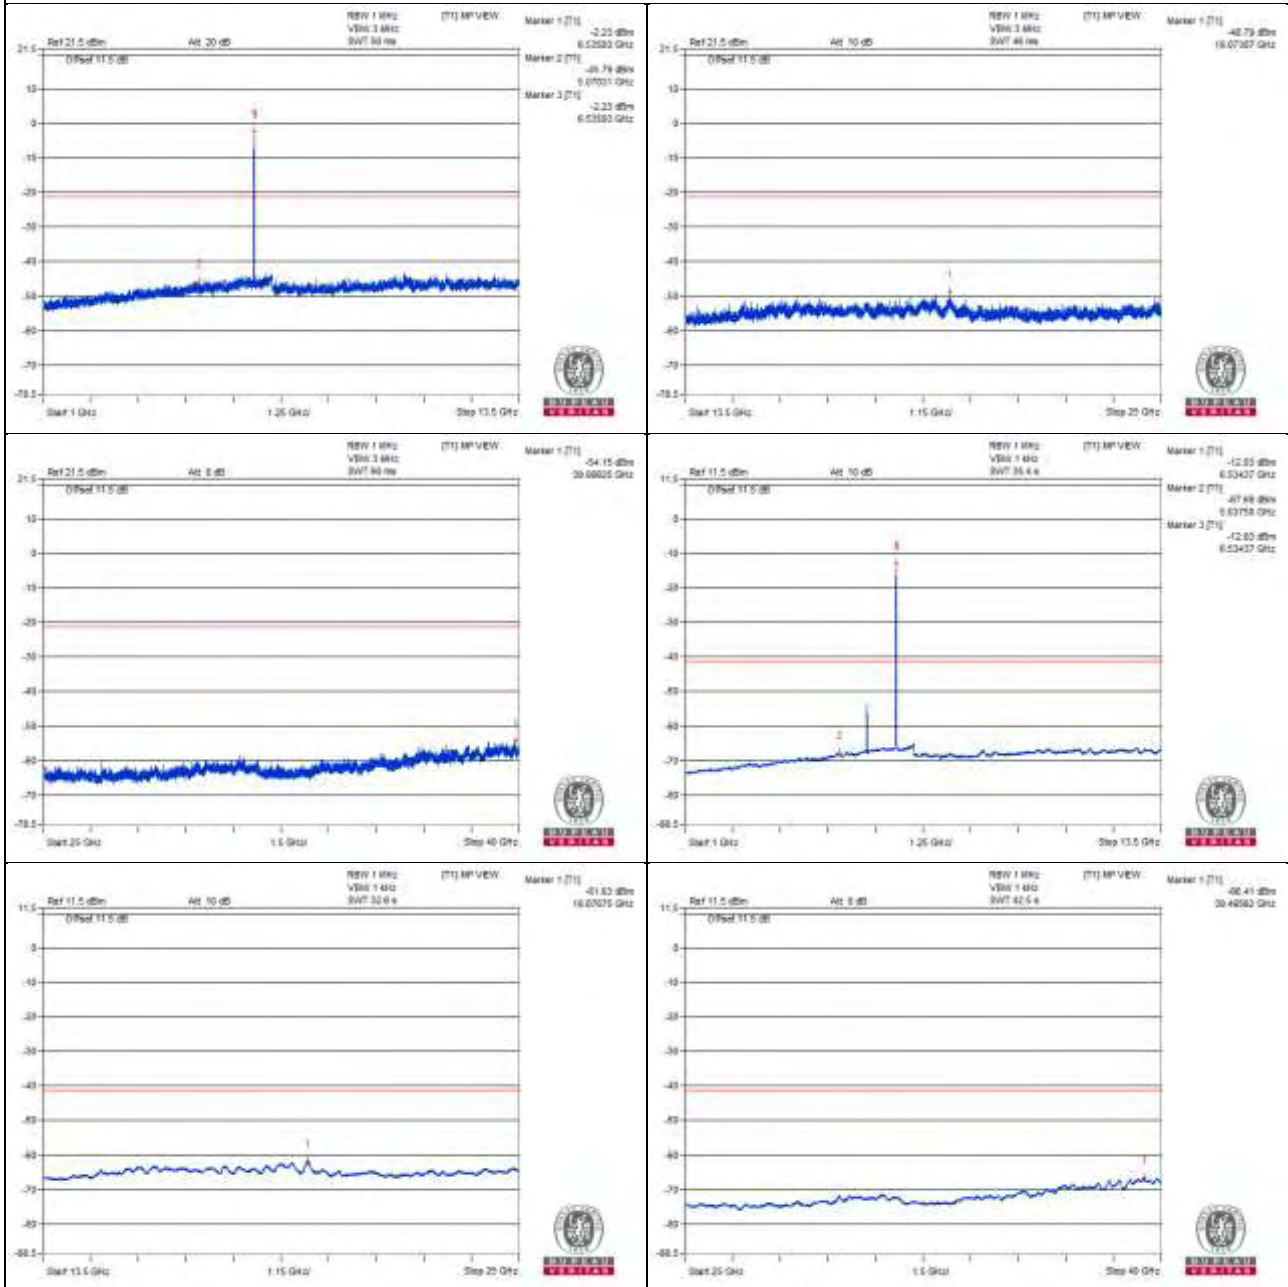

802.11ax (HE20) - Channel 149

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	13400 PK	60.28	74	-13.72	-46.18	-46.14	8.17	-34.98
2	13390.62 AV	38.79	54	-15.21	-67.58	-67.72	8.17	-56.47
3	20076.56 PK	52.74	74	-21.26	-53.55	-53.86	8.17	-42.52
4	20086.62 AV	41.5	54	-12.5	-64.83	-65.06	8.17	-53.76

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

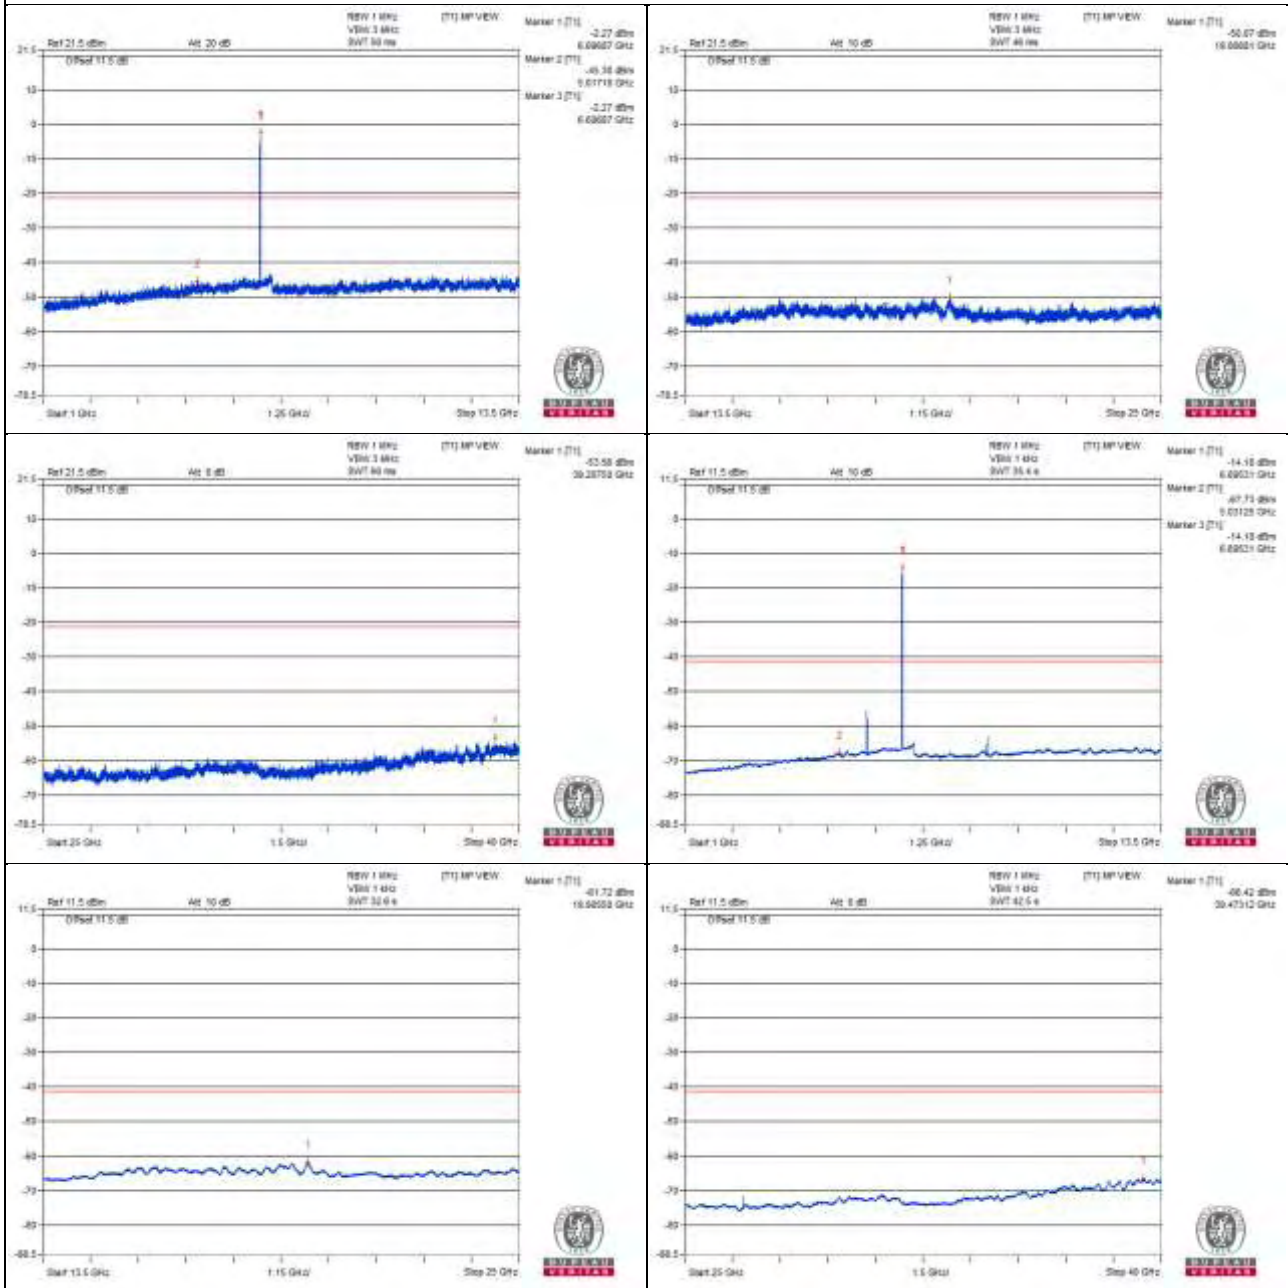

Chain 1

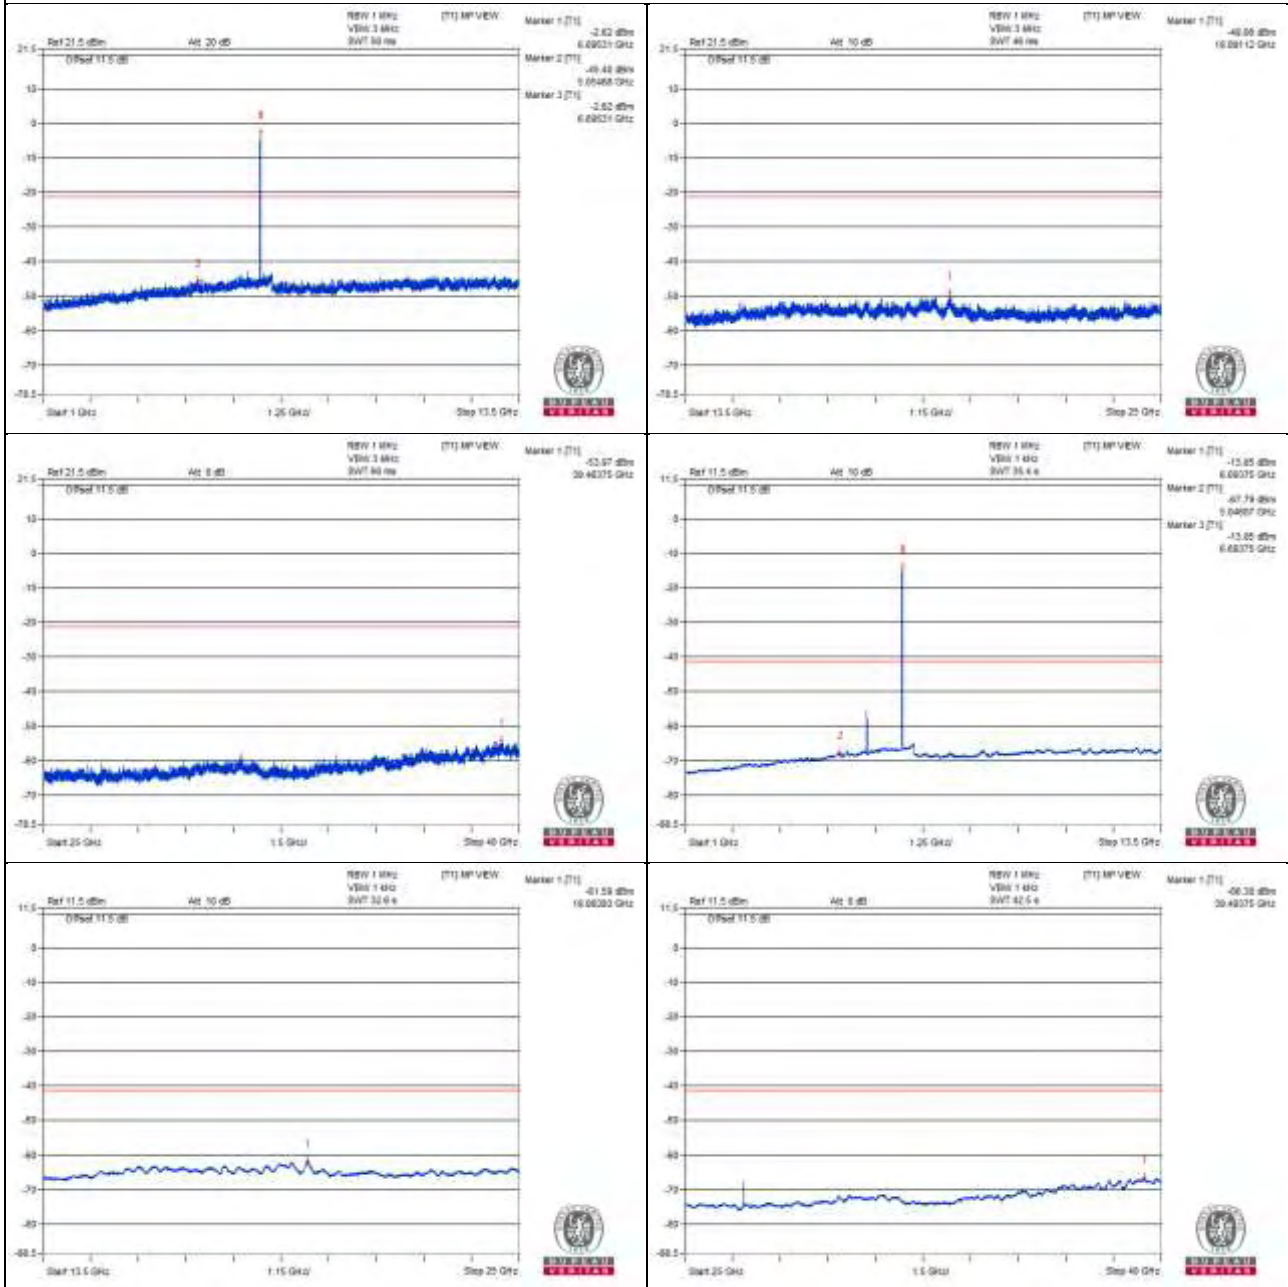

802.11ax (HE20) - Channel 181

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	13702.68 PK	50.59	88.2	-37.61	-55.22	-56.59	8.17	-44.67
2	13708.43 AV	39.66	68.2	-28.54	-66.82	-66.74	8.17	-55.6
3	20572.5 PK	52.5	74	-21.5	-54.5	-53.44	8.17	-42.76
4	20569.62 AV	41.09	54	-12.91	-65.38	-65.32	8.17	-54.17

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

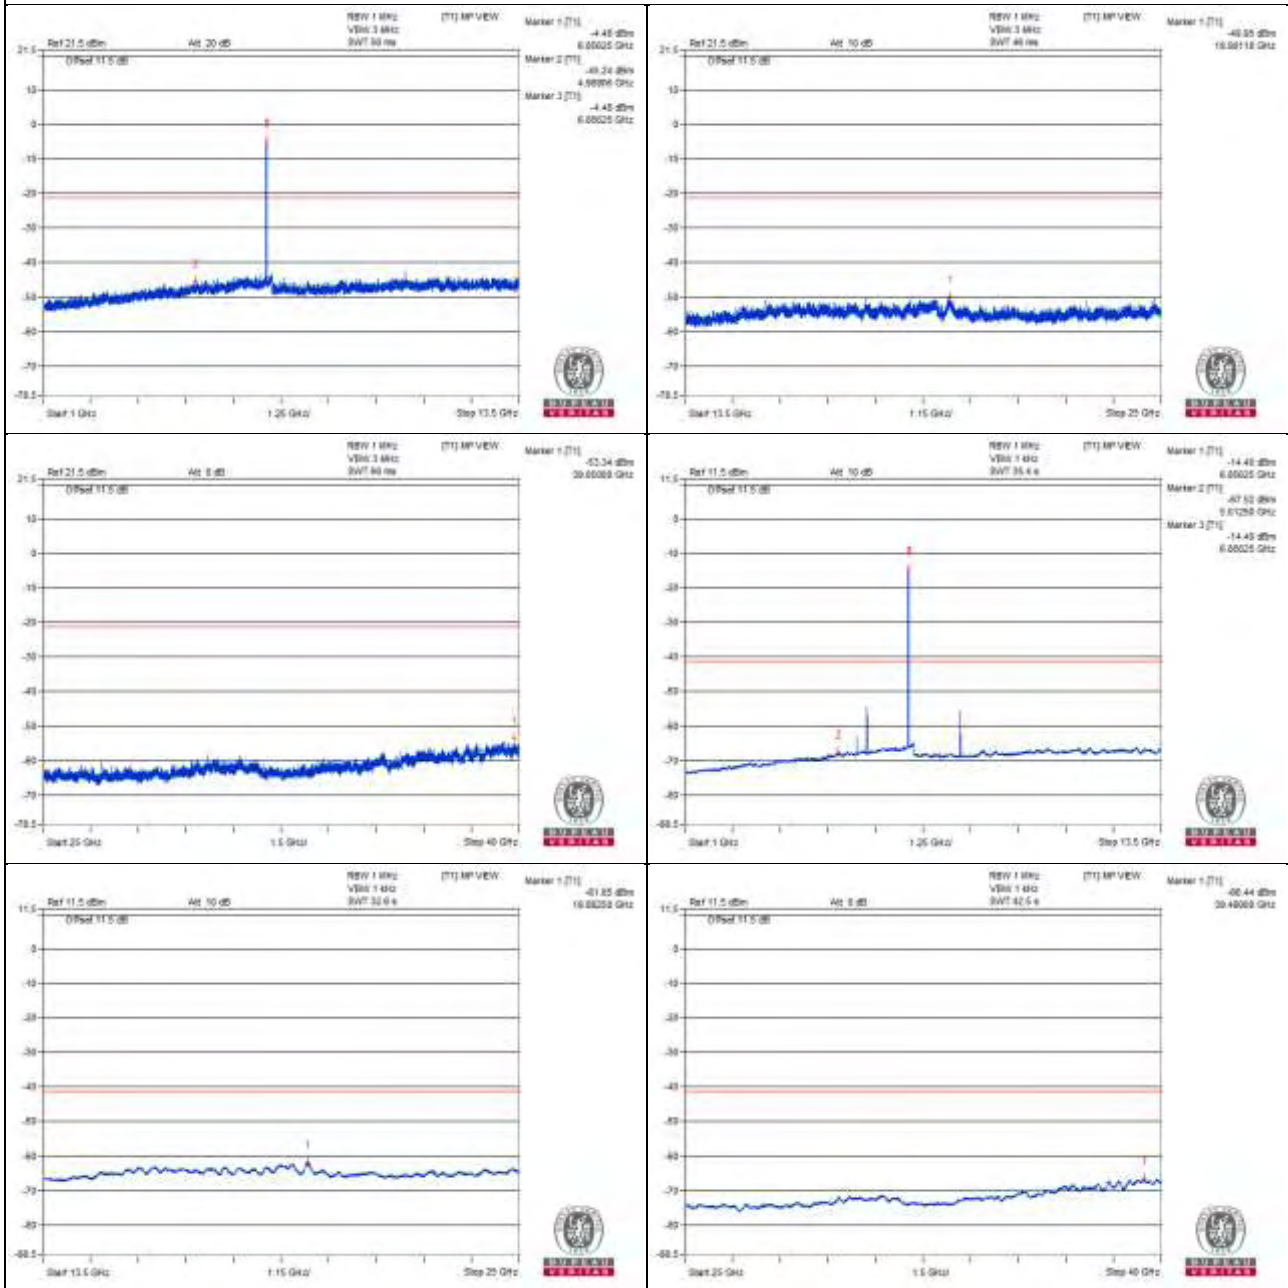

Chain 1

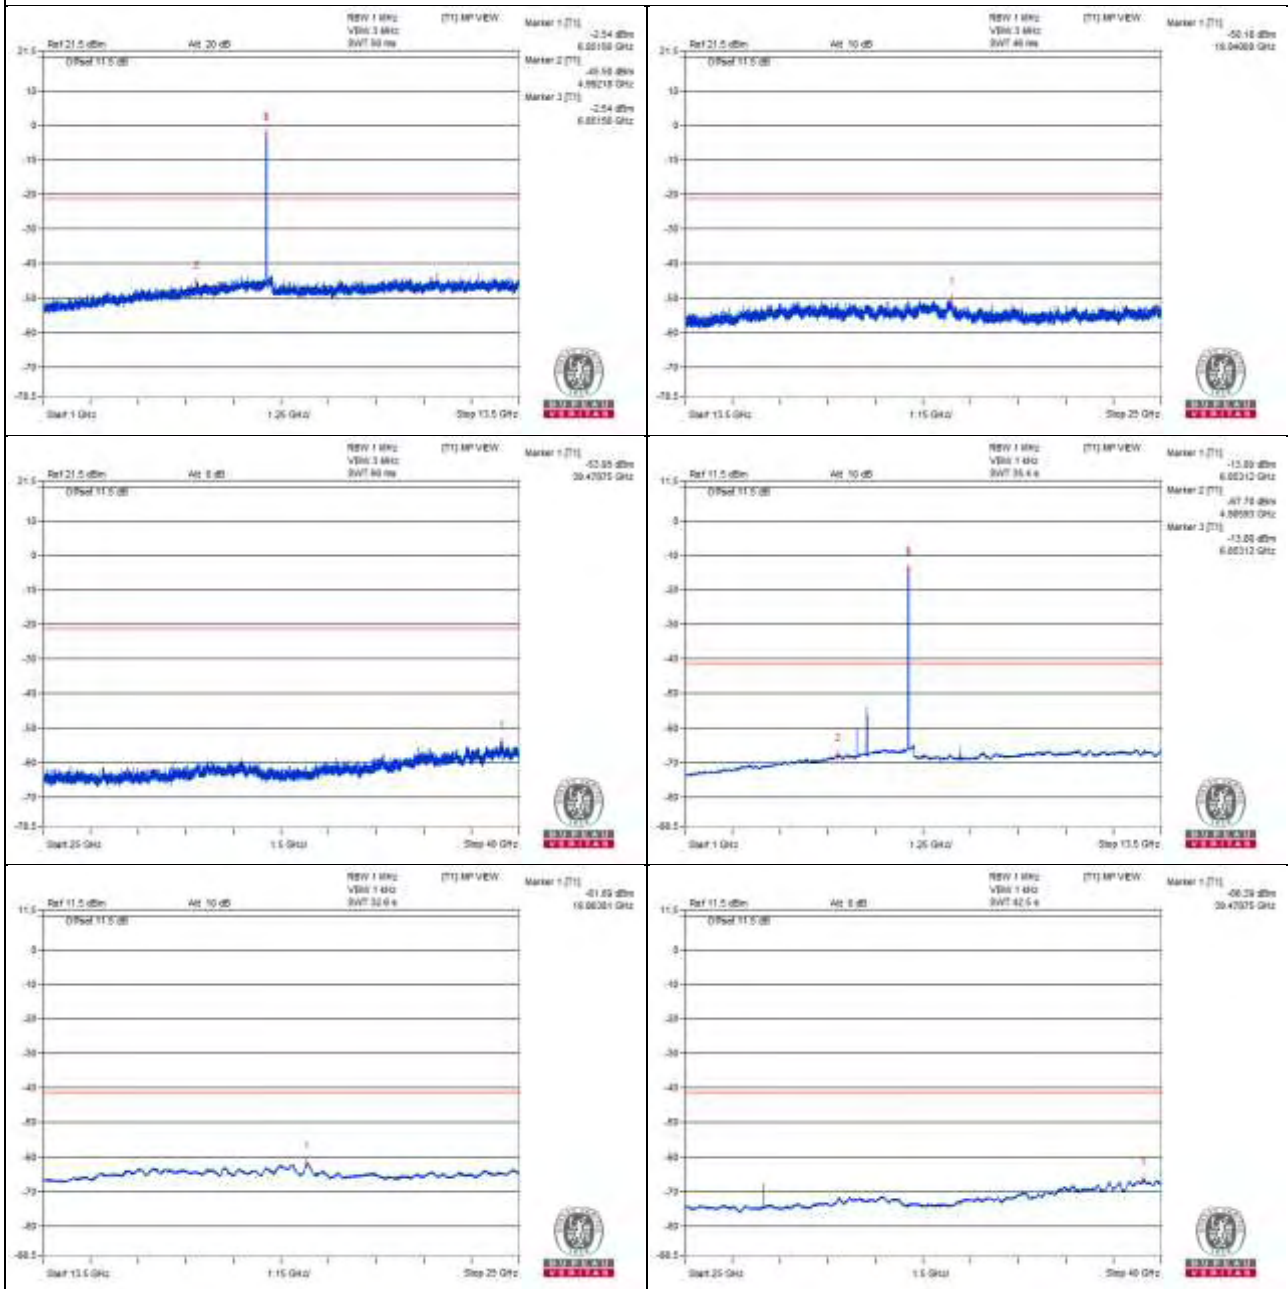

802.11ax (HE20) - Channel 185

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	13745.81 PK	50.54	88.2	-37.66	-55.87	-55.94	8.17	-44.72
2	13754.43 AV	39.66	68.2	-28.54	-66.74	-66.83	8.17	-55.6
3	20634.31 PK	53.79	74	-20.21	-50.99	-55.36	8.17	-41.47
4	20630 AV	41.79	54	-12.21	-64.6	-64.71	8.17	-53.47

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

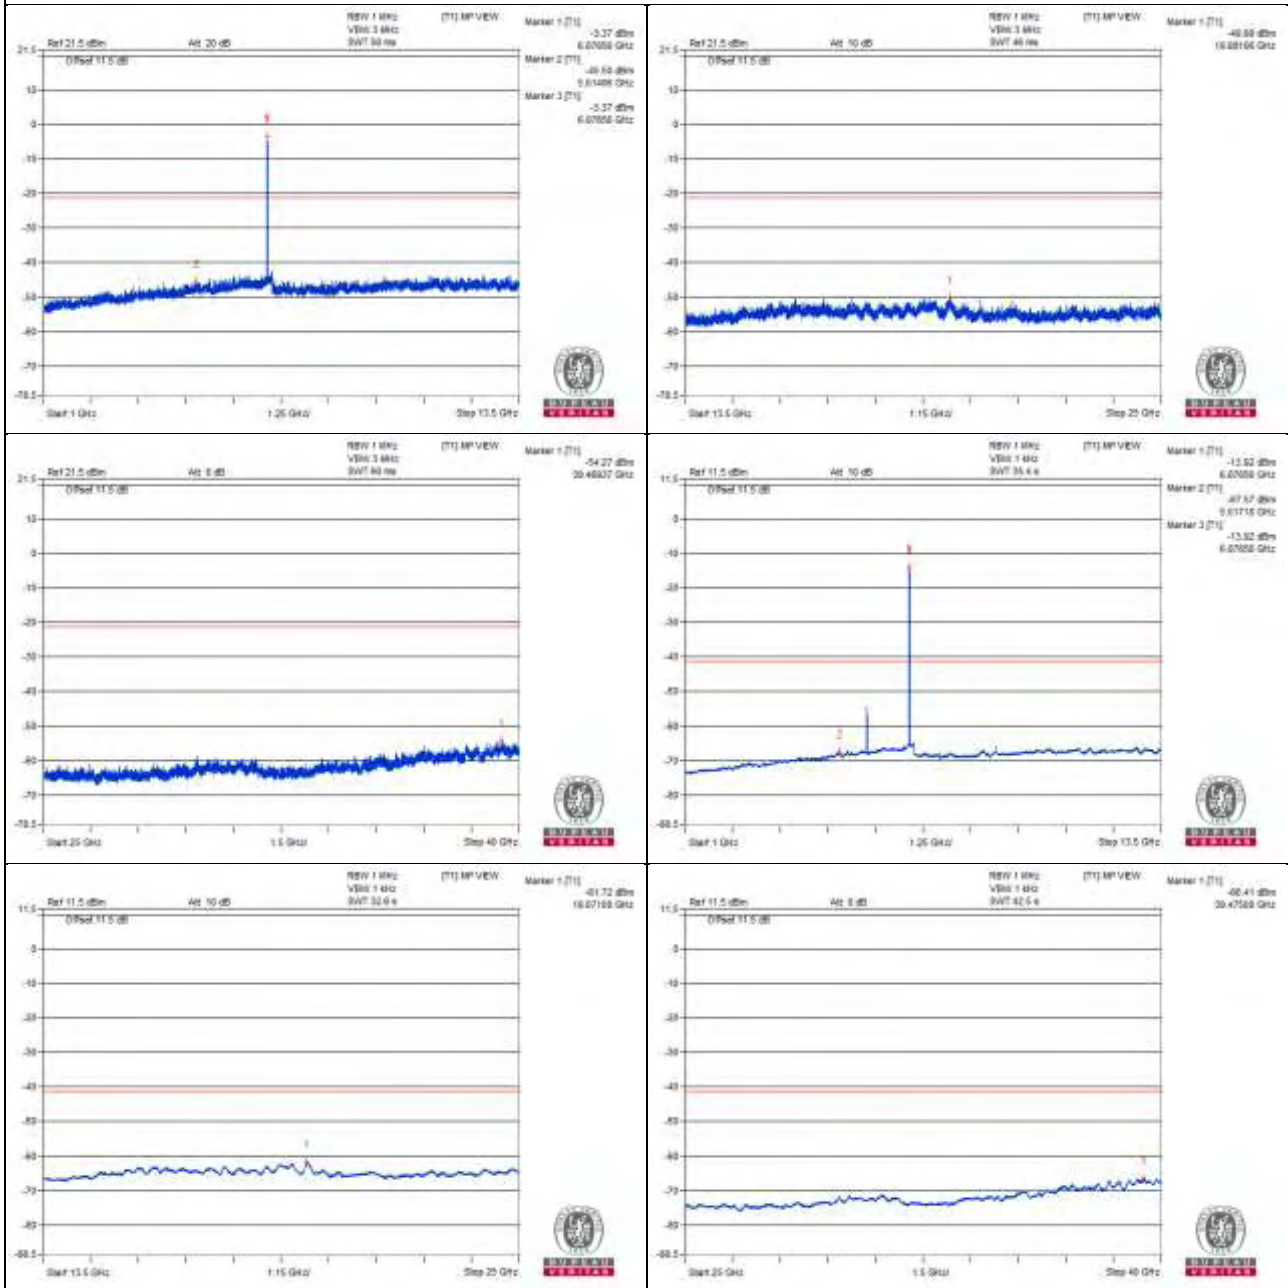

Chain 1

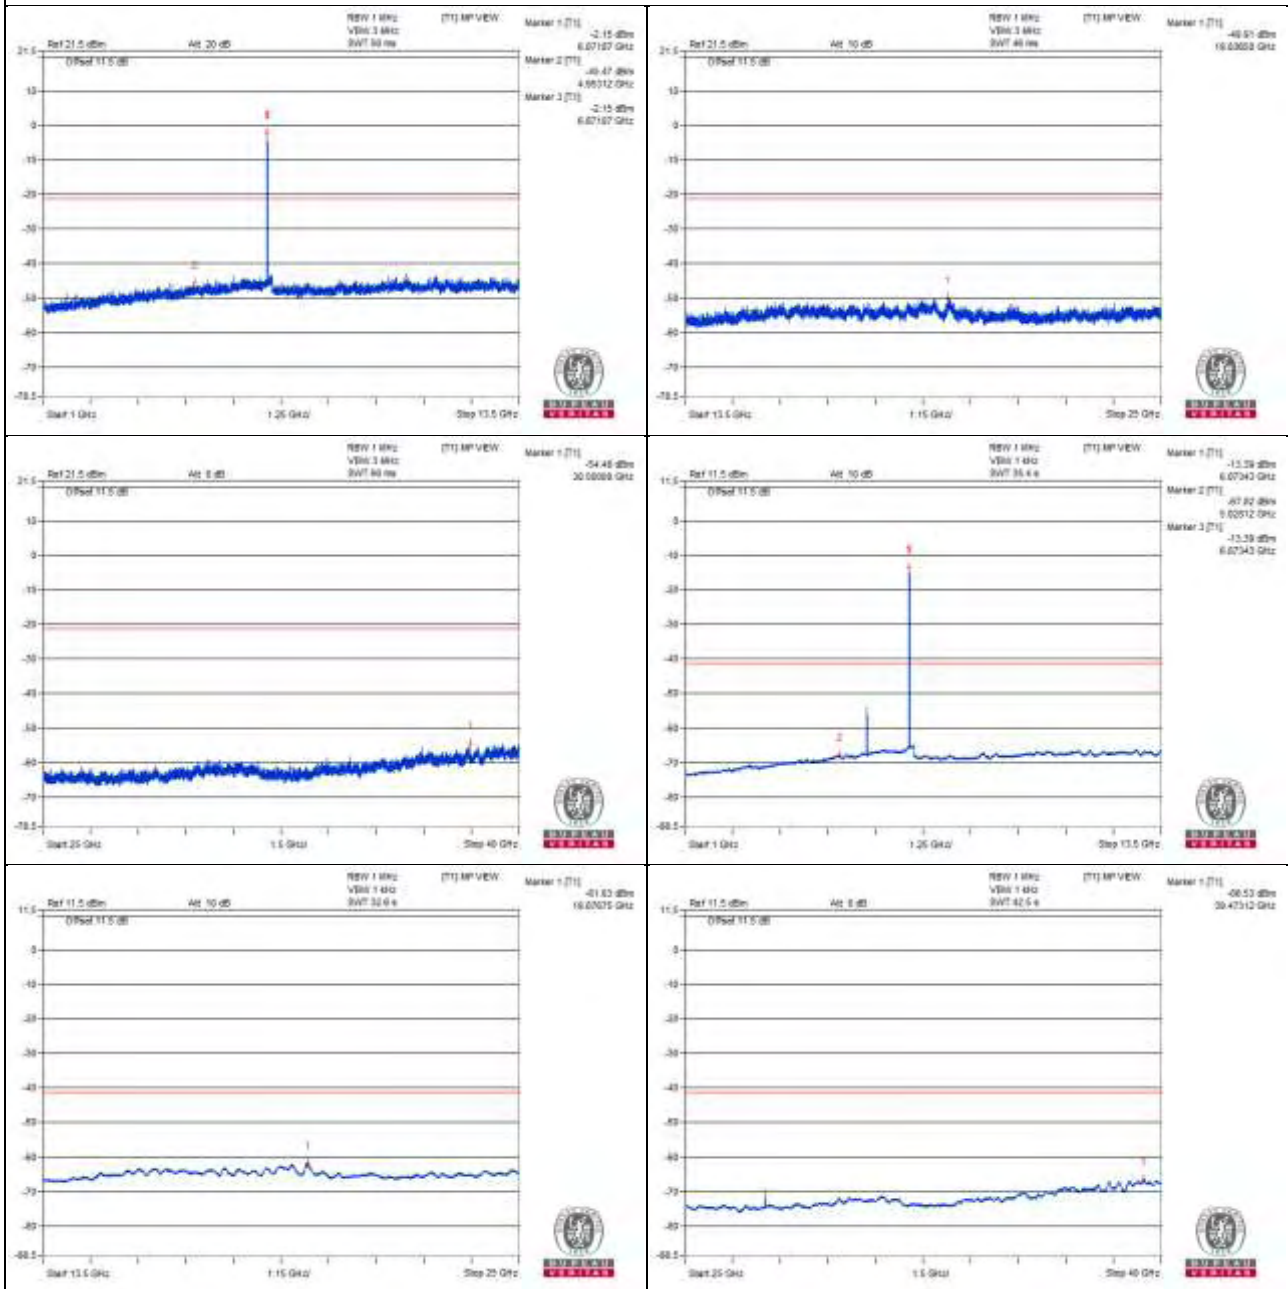

802.11ax (HE20) - Channel 209

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	13985.87 PK	51.25	88.2	-36.95	-54.04	-56.76	8.17	-44.01
2	13988.75 AV	39.82	68.2	-28.38	-67.07	-66.21	8.17	-55.44
3	20990.81 PK	51.98	74	-22.02	-54.54	-54.38	8.17	-43.28
4	20979.31 AV	41.06	54	-12.94	-65.18	-65.59	8.17	-54.2

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

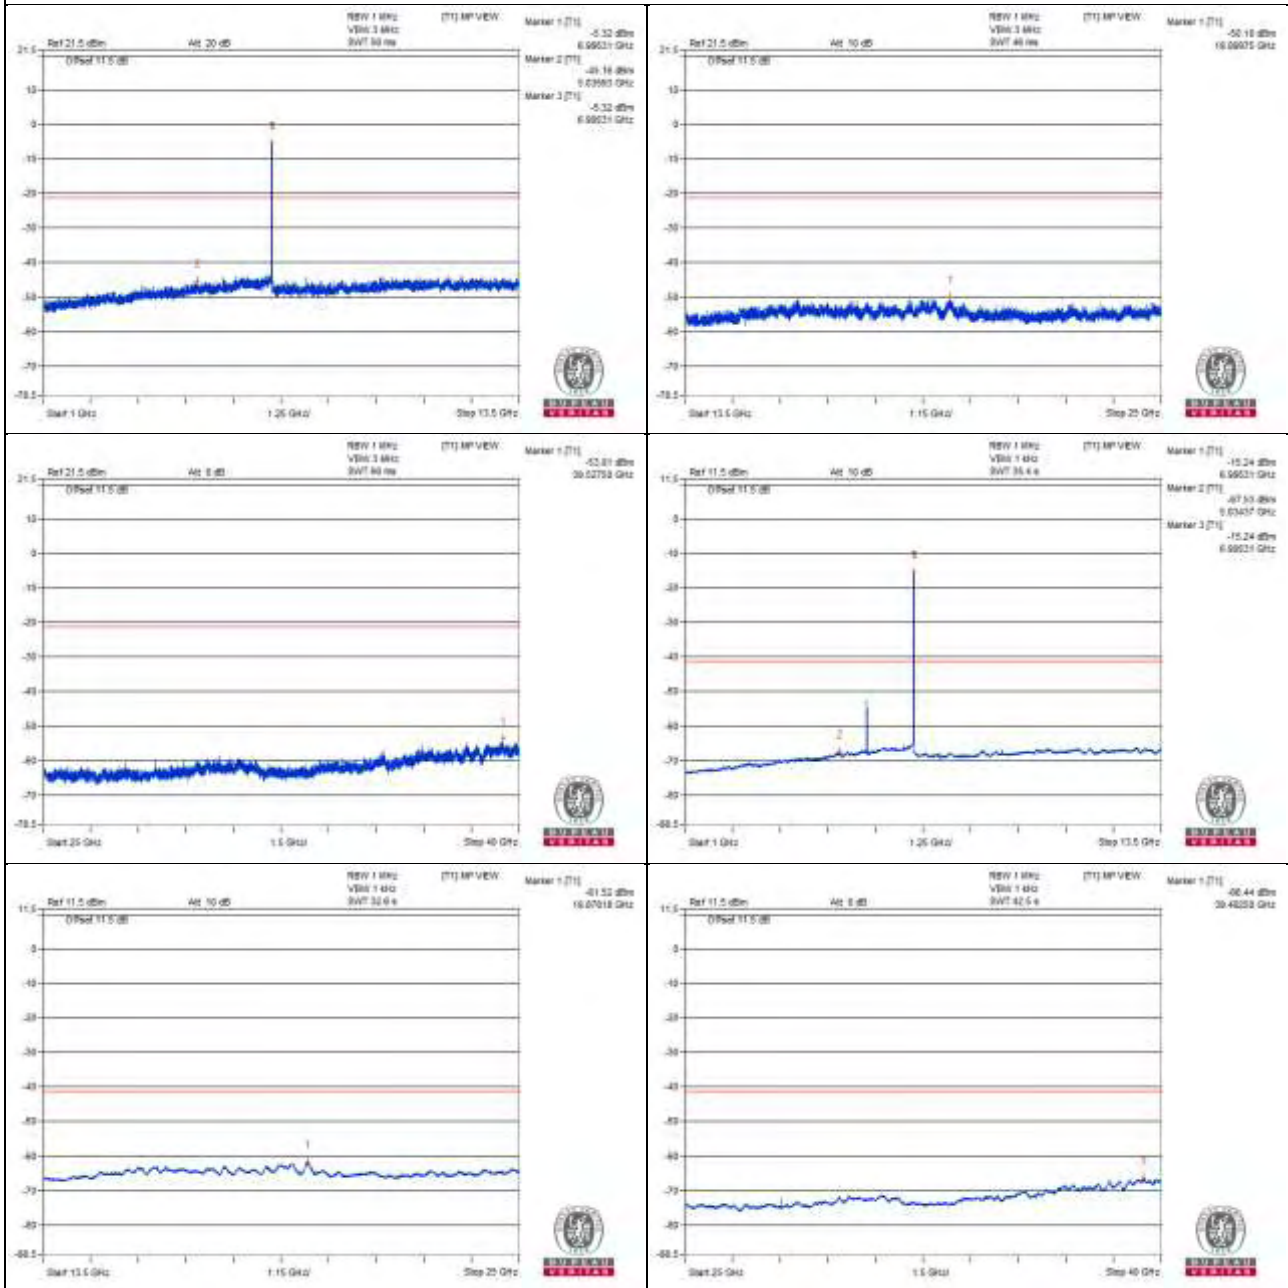

Chain 1

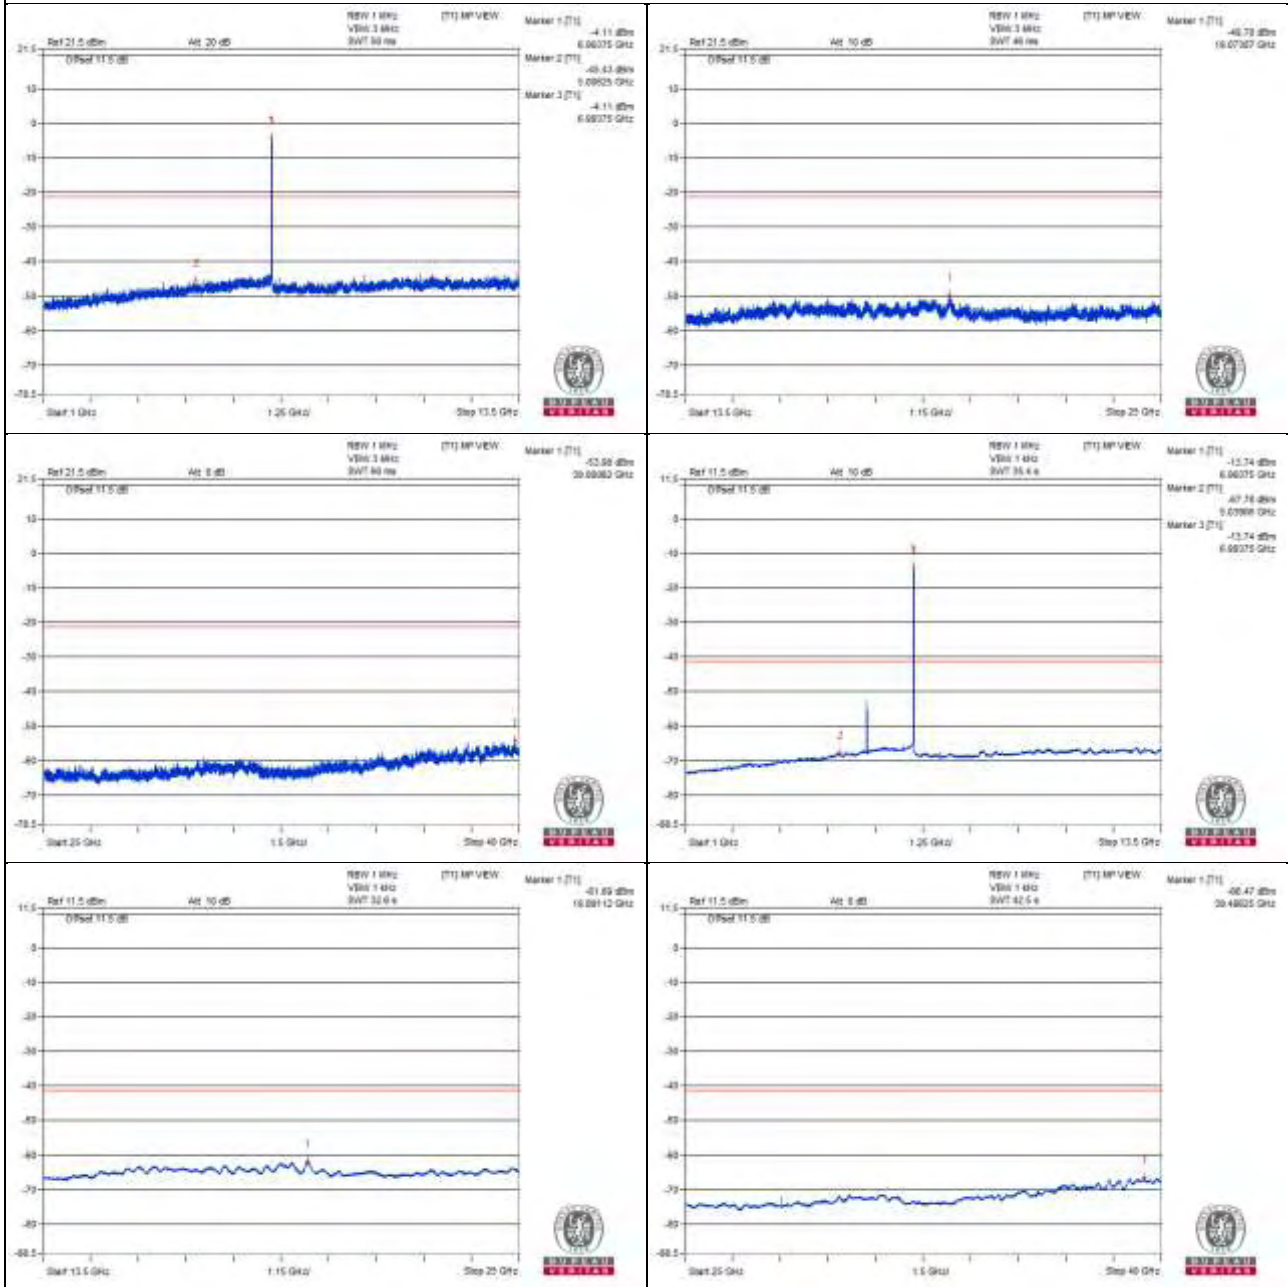

802.11ax (HE20) - Channel 229

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	14195.75 PK	51.15	88.2	-37.05	-55.54	-55.06	8.17	-44.11
2	14187.12 AV	40.5	68.2	-27.7	-65.85	-66.04	8.17	-54.76
3	21284.06 PK	53.52	74	-20.48	-53.65	-52.29	8.17	-41.74
4	21294.12 AV	41.39	54	-12.61	-64.82	-65.3	8.17	-53.87

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

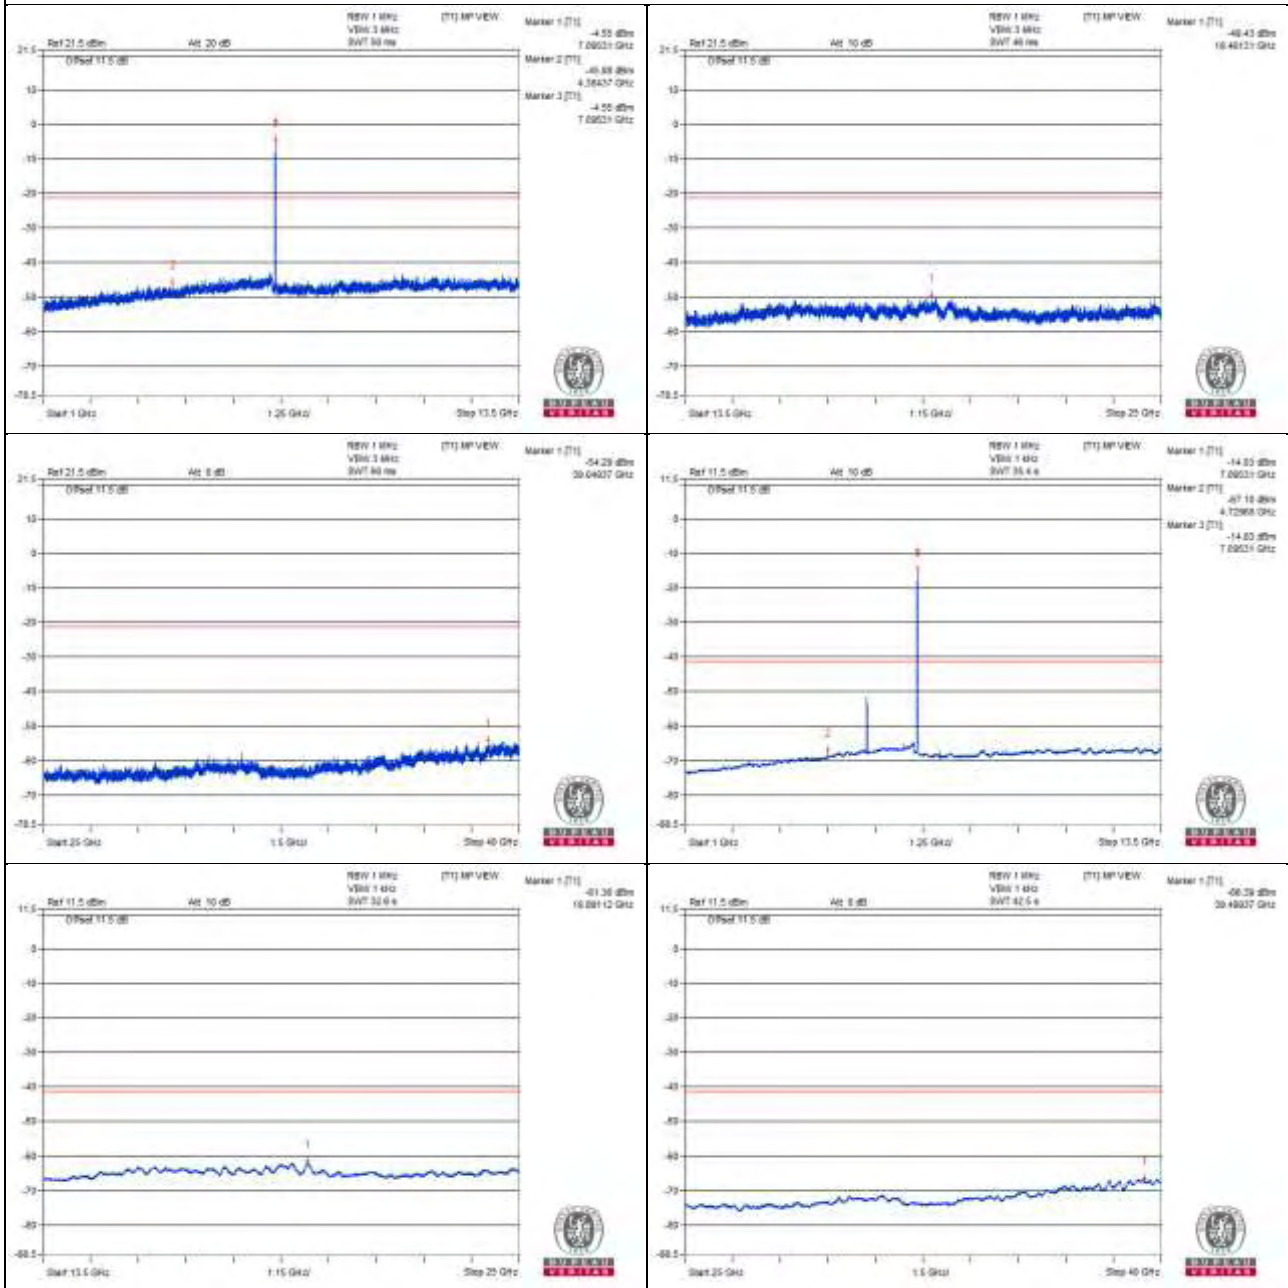

Chain 1

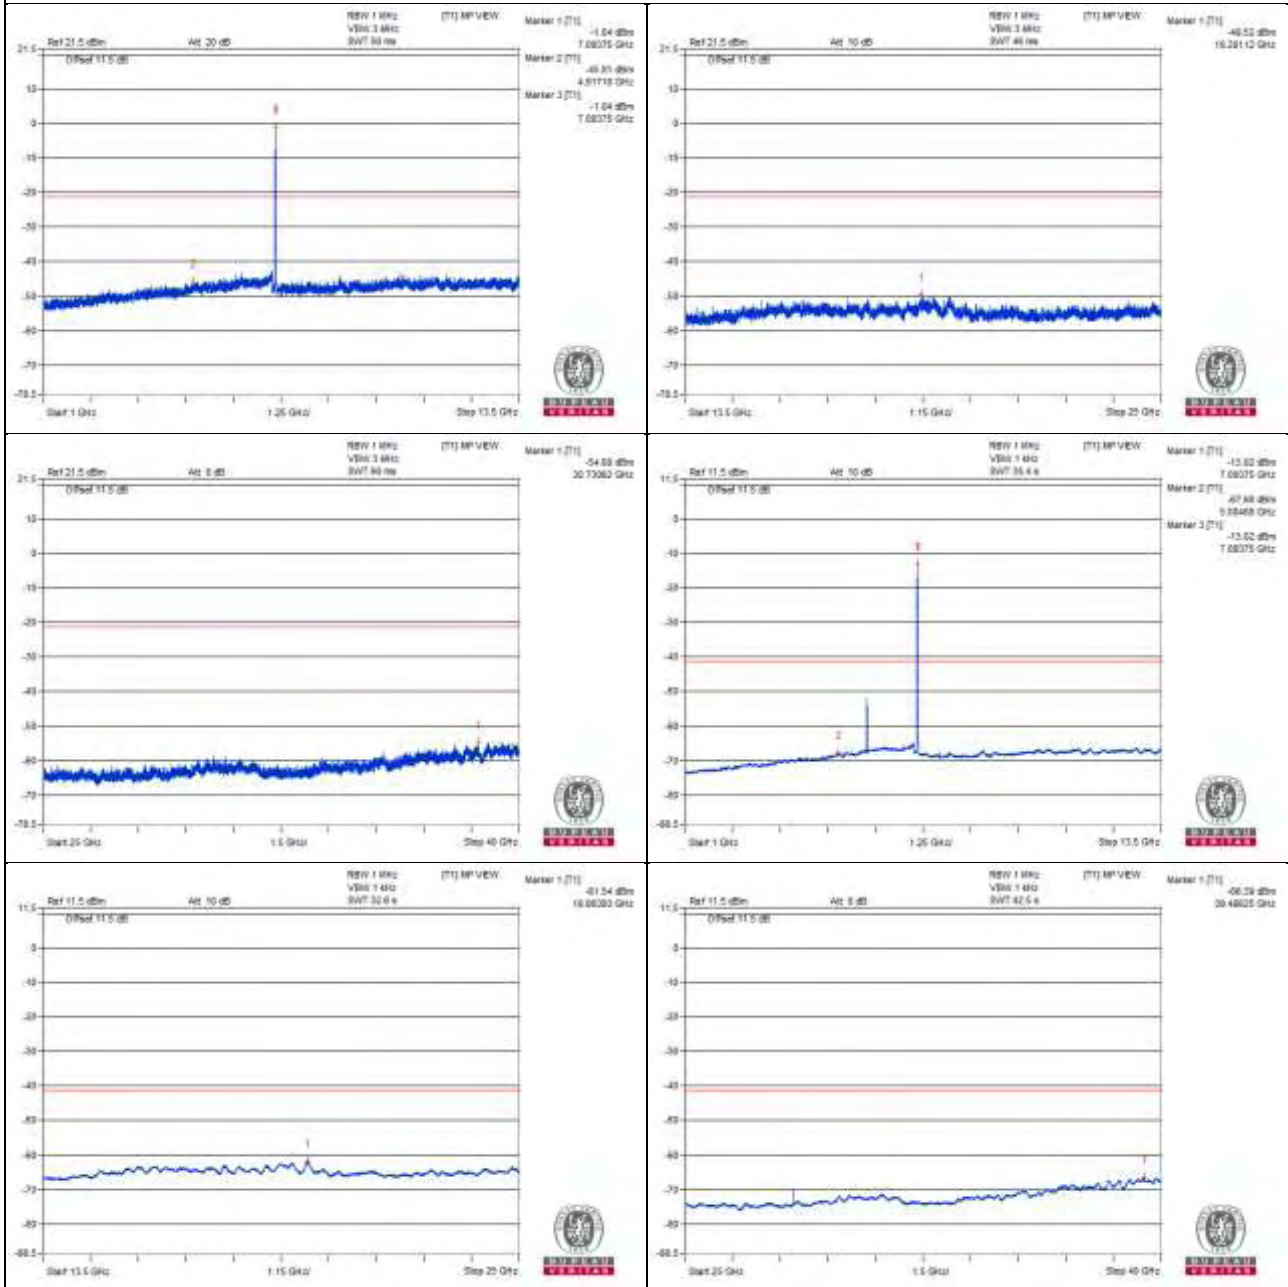

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	7176.37 PK	60.78	88.2	-27.42	-44.84	-46.58	8.13	-34.48
2	7206.9 AV	47.29	68.2	-20.91	-59.1	-59.13	8.13	-47.97

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

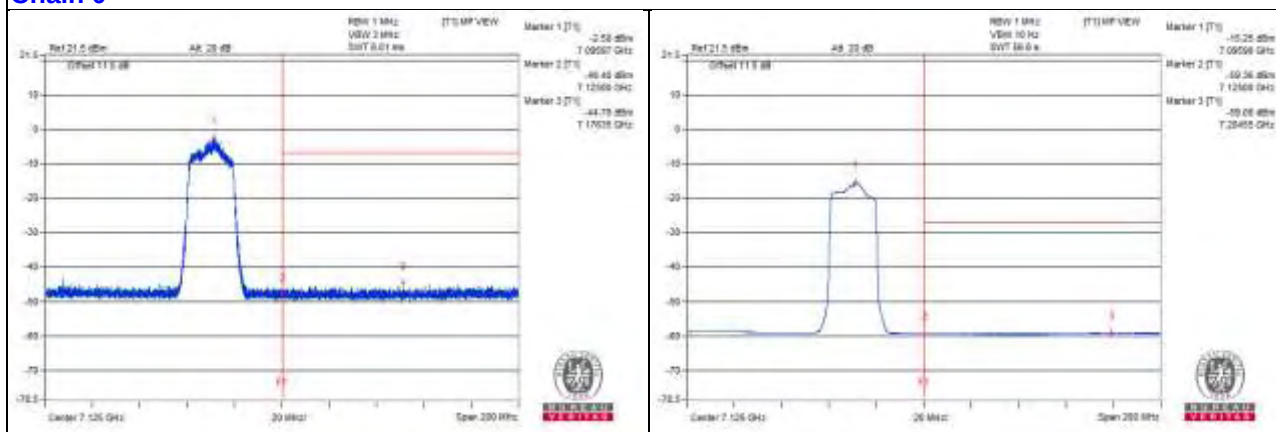

Chain 1

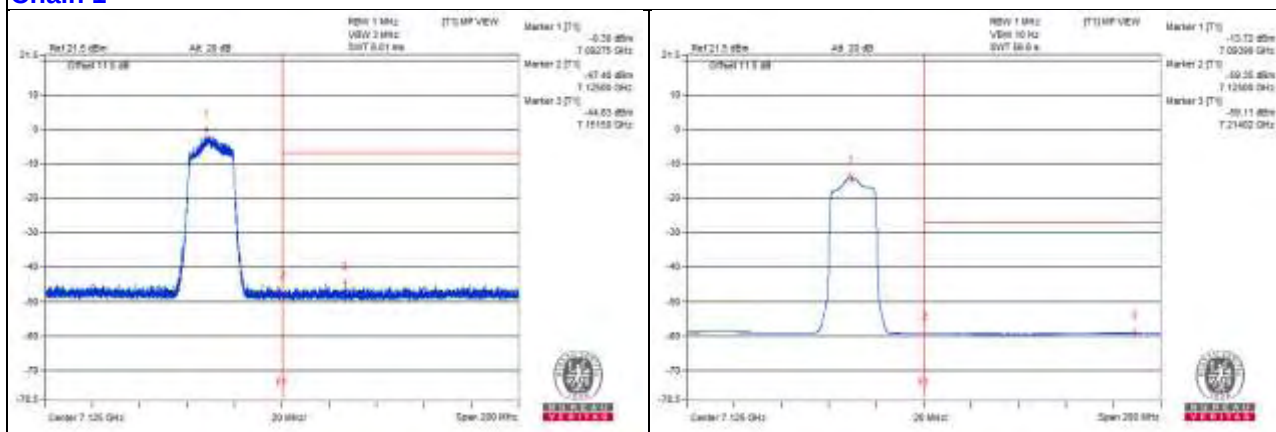

802.11ax (HE20) - Channel 233

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	14211.56 PK	52.52	88.2	-35.68	-54.59	-53.34	8.17	-42.74
2	14228.81 AV	40.52	68.2	-27.68	-65.72	-66.13	8.17	-54.74
3	21364.56 PK	53.22	74	-20.78	-53.95	-52.6	8.17	-42.04
4	21354.5 AV	41.54	54	-12.46	-64.78	-65.03	8.17	-53.72

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

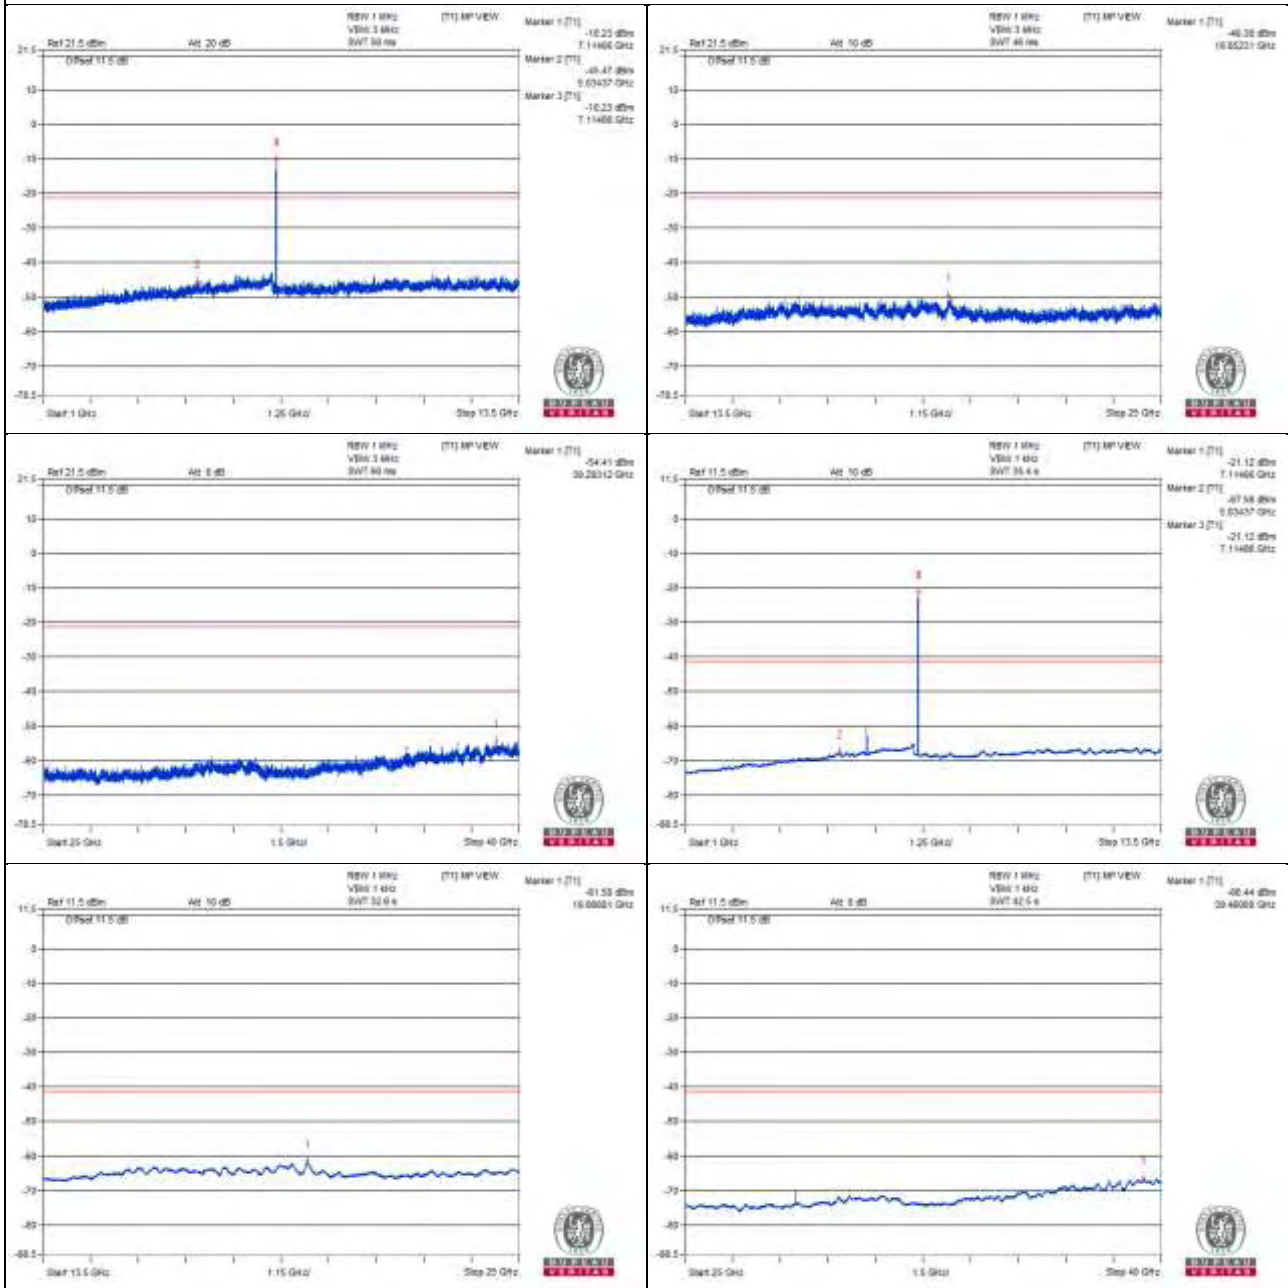

Chain 1

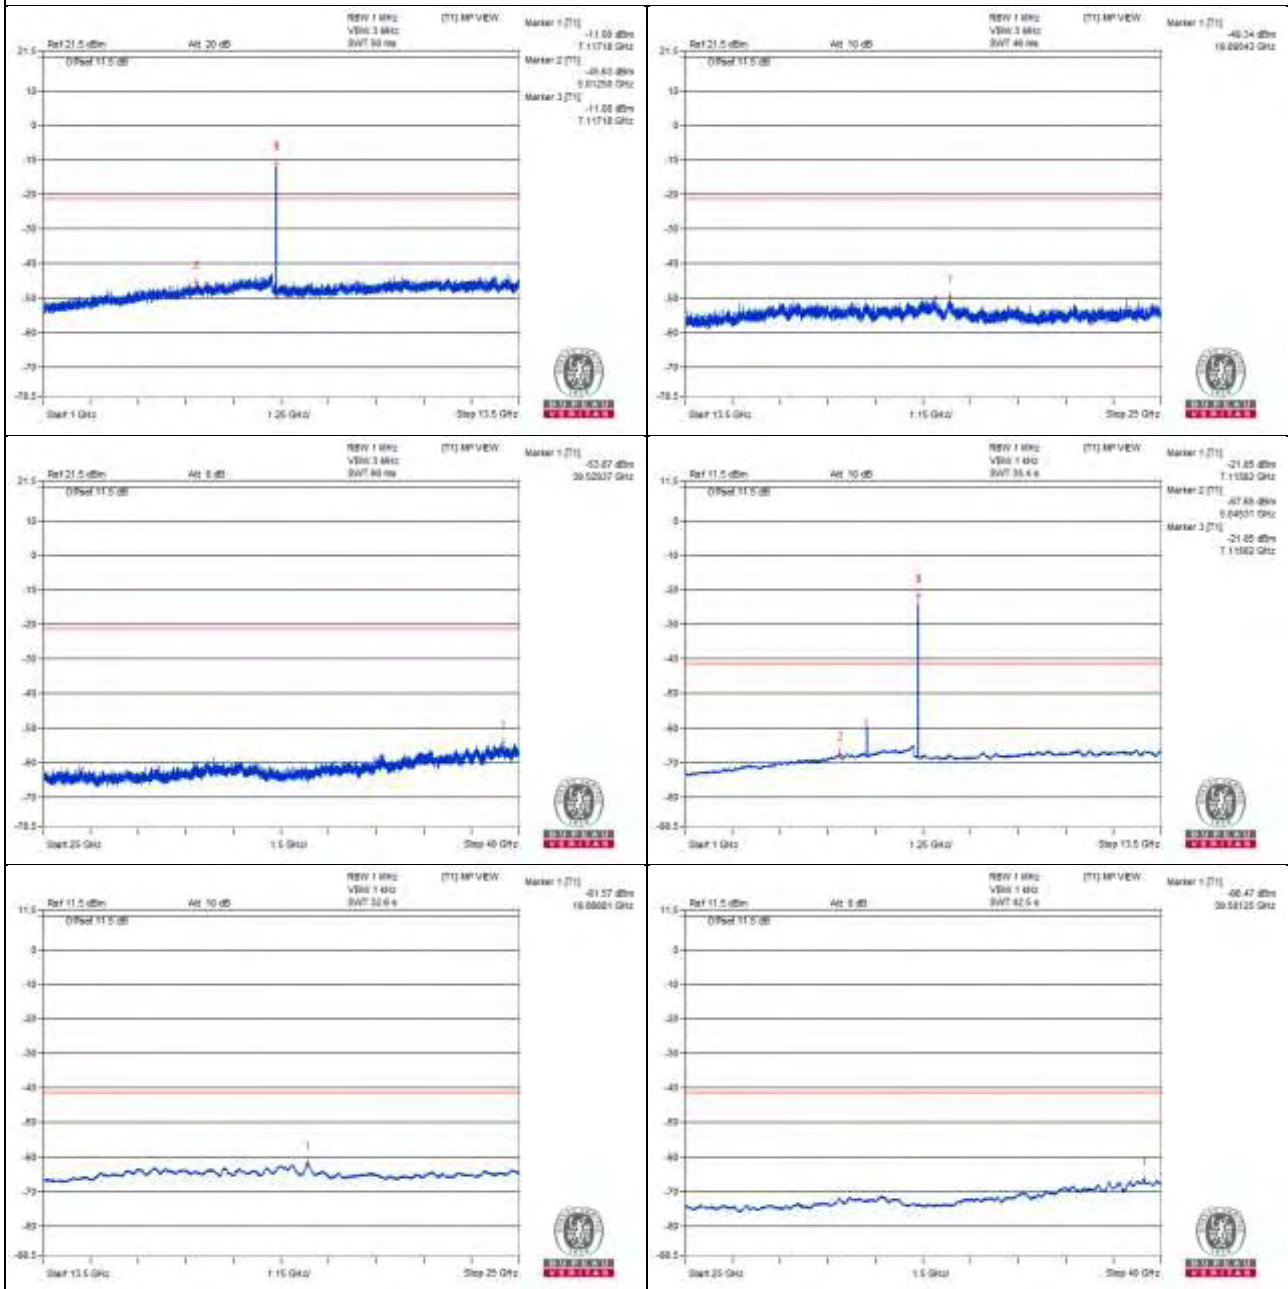

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	7125.12 PK	78.63	88.2	-9.57	-26.4	-29.78	8.13	-16.63
2	7125 AV	66.42	68.2	-1.78	-39.09	-41.1	8.13	-28.84

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

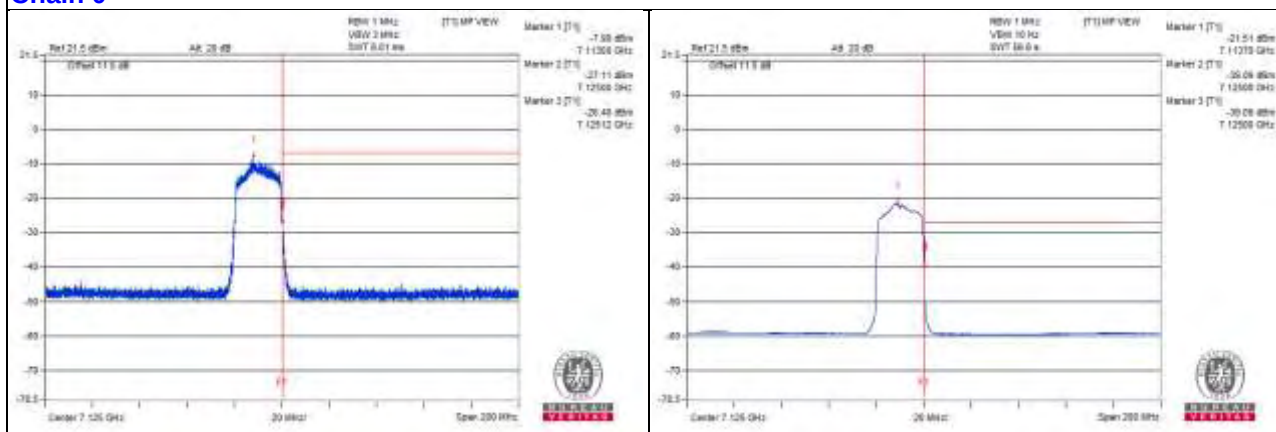

Chain 1

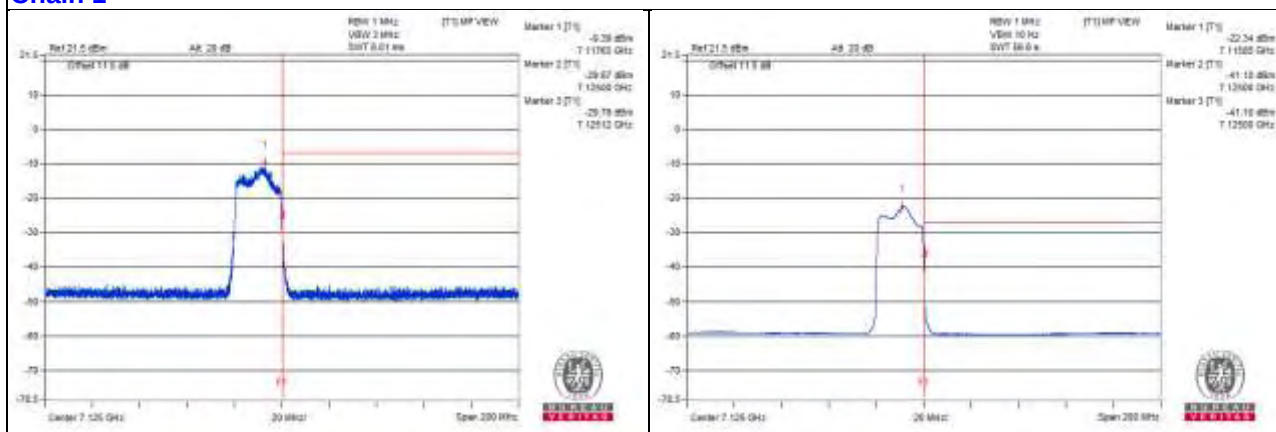

802.11ax (HE40) - Channel 3

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	11928.12 PK	61.14	74	-12.86	-46.39	-44.43	8.17	-34.12
2	11923.43 AV	39.22	54	-14.78	-67.1	-67.35	8.17	-56.04
3	17893 PK	53.66	74	-20.34	-52.58	-52.98	8.17	-41.6
4	17894.43 AV	43.13	54	-10.87	-63.4	-63.23	8.17	-52.13

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

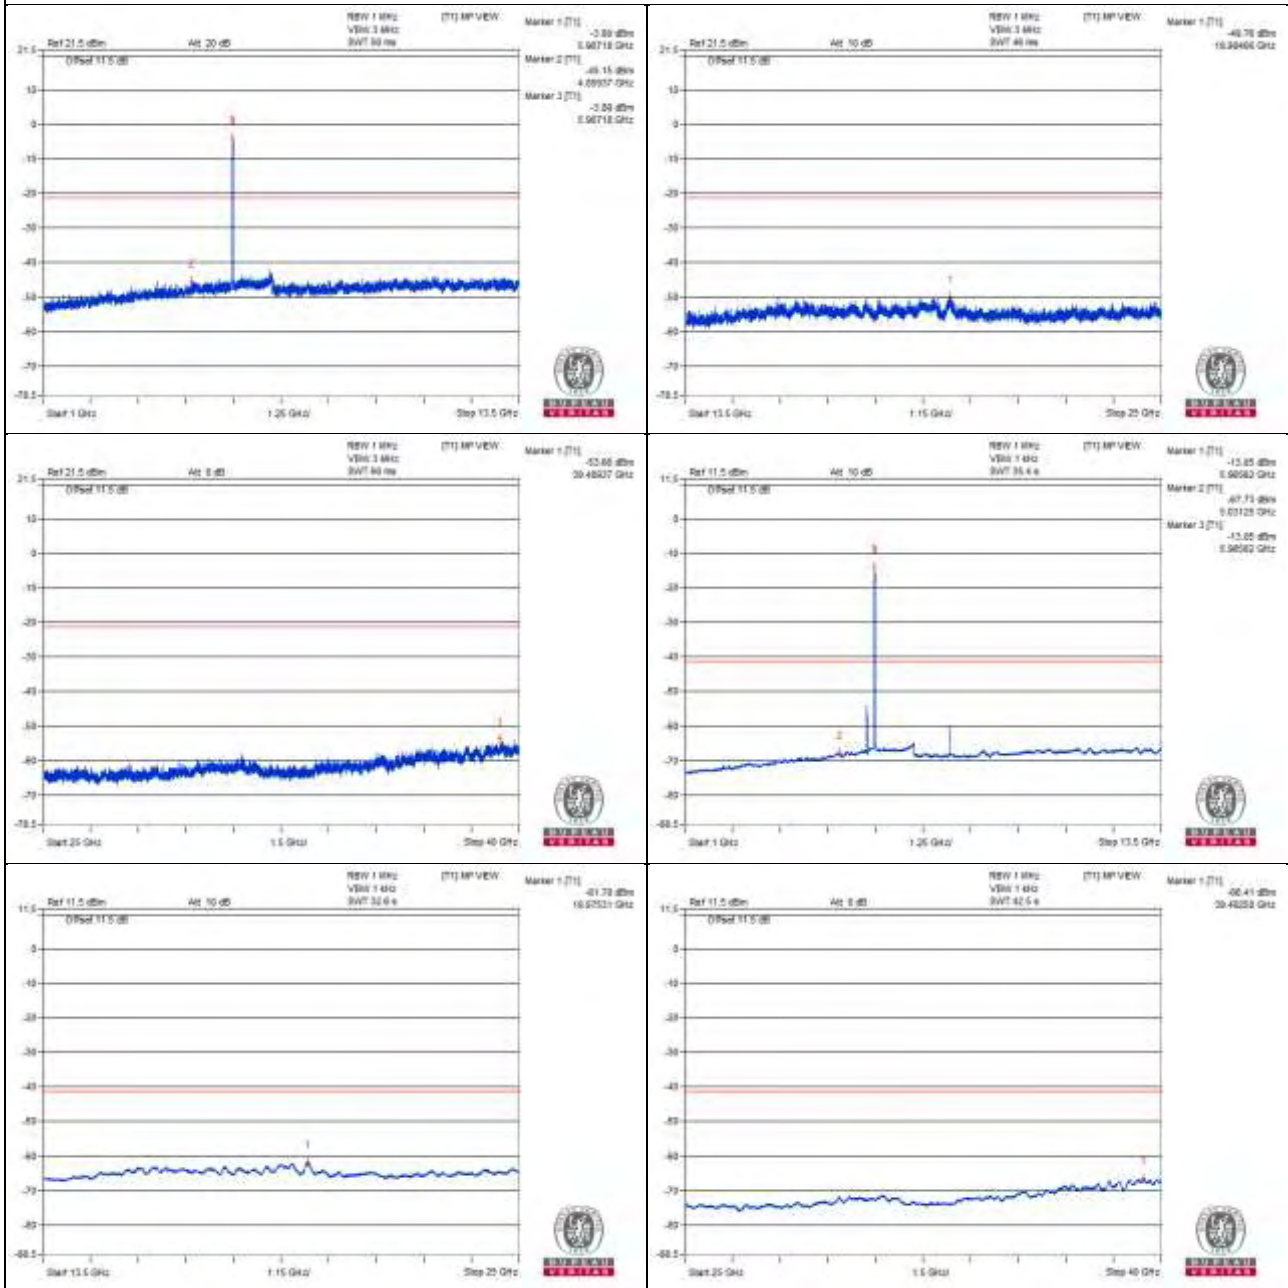

Chain 1

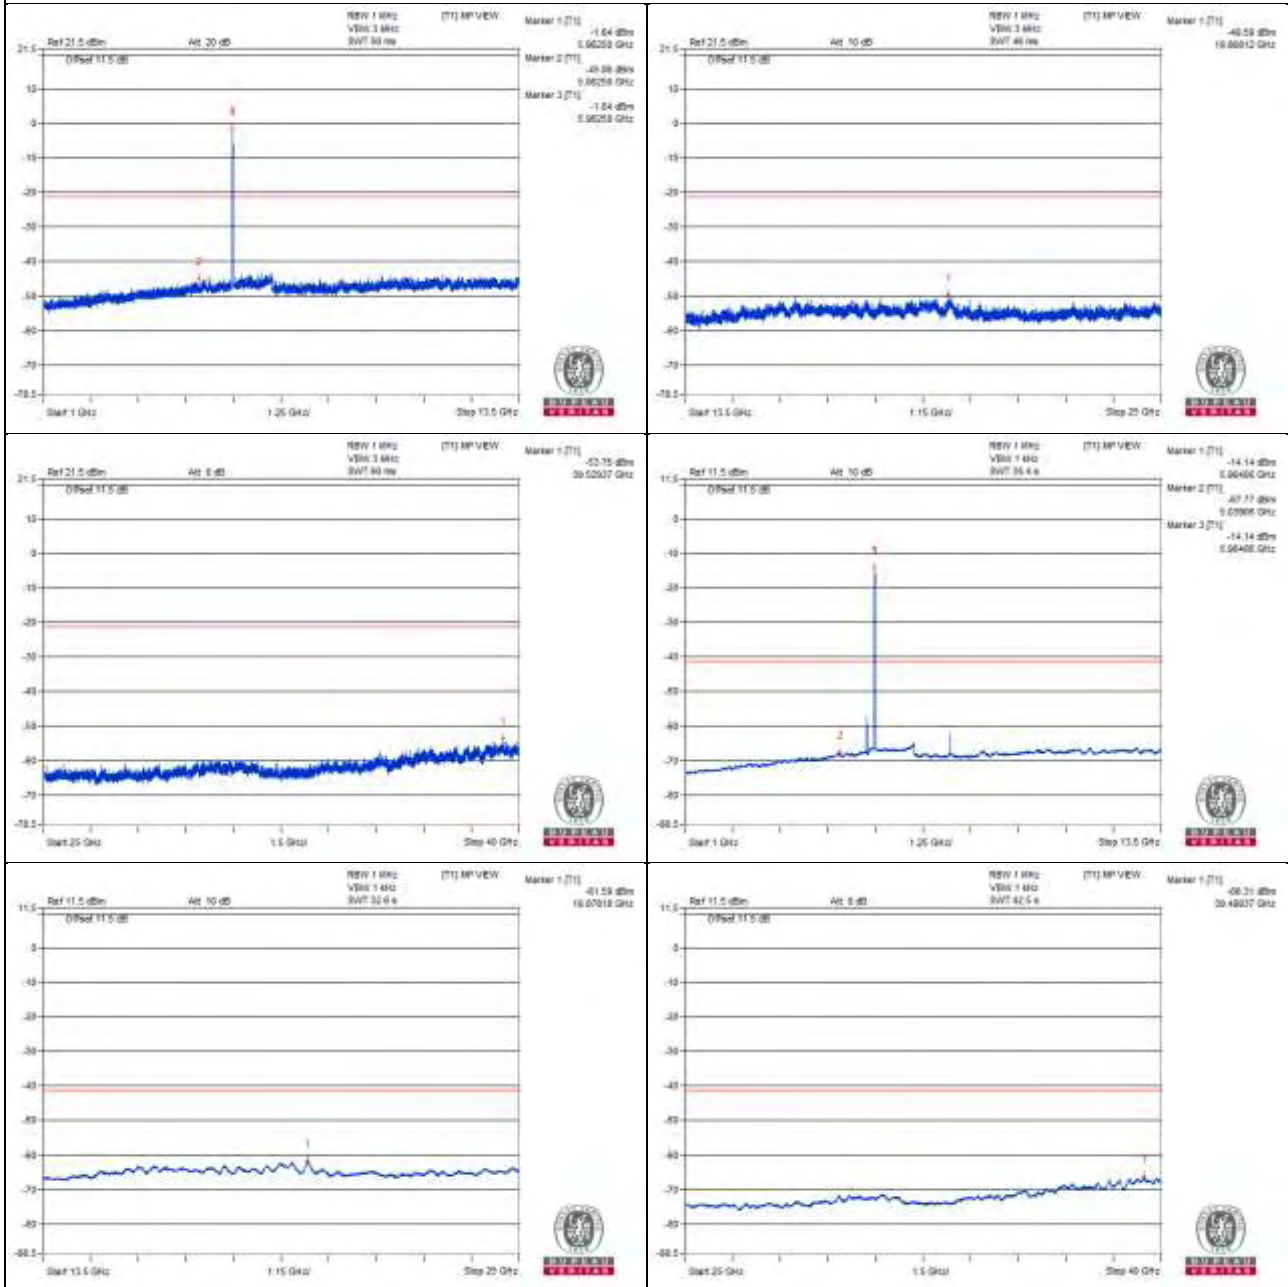

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5905.82 PK	61.76	88.2	-26.44	-46.39	-43.42	8.15	-33.5
2	5903.85 AV	48.11	68.2	-20.09	-58.26	-58.37	8.15	-47.15

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

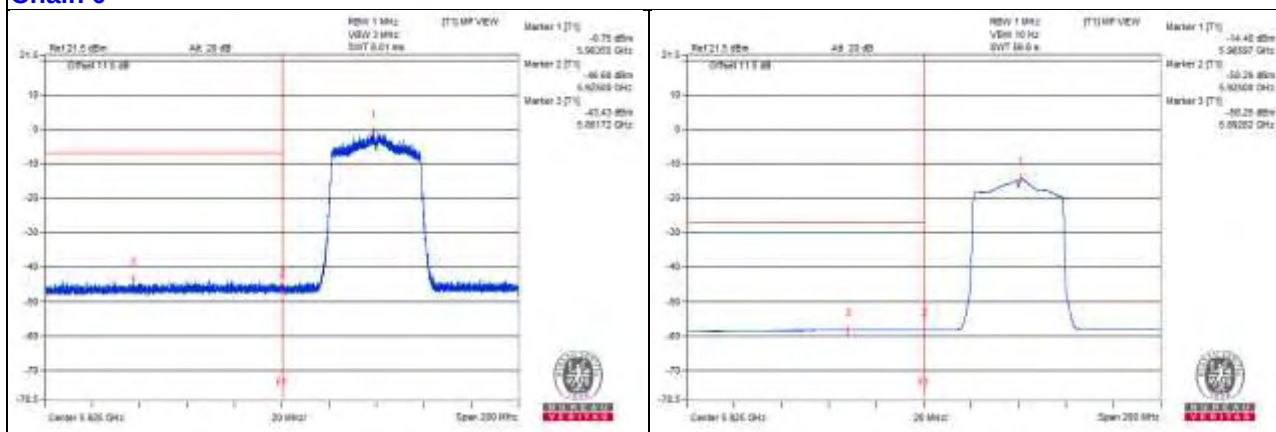

Chain 1

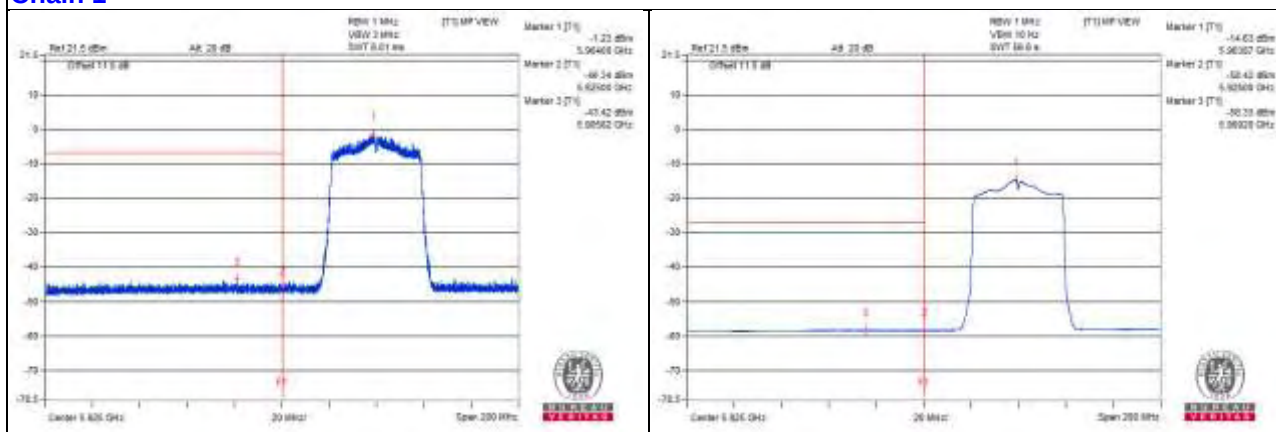

802.11ax (HE40) - Channel 43

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	12335.93 PK	60.92	74	-13.08	-46.21	-44.93	8.17	-34.34
2	12331.25 AV	39.44	54	-14.56	-67.01	-66.99	8.17	-55.82
3	18492.43 PK	52.32	74	-21.68	-53.52	-54.82	8.17	-42.94
4	18499.62 AV	42.2	54	-11.8	-64.26	-64.23	8.17	-53.06

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

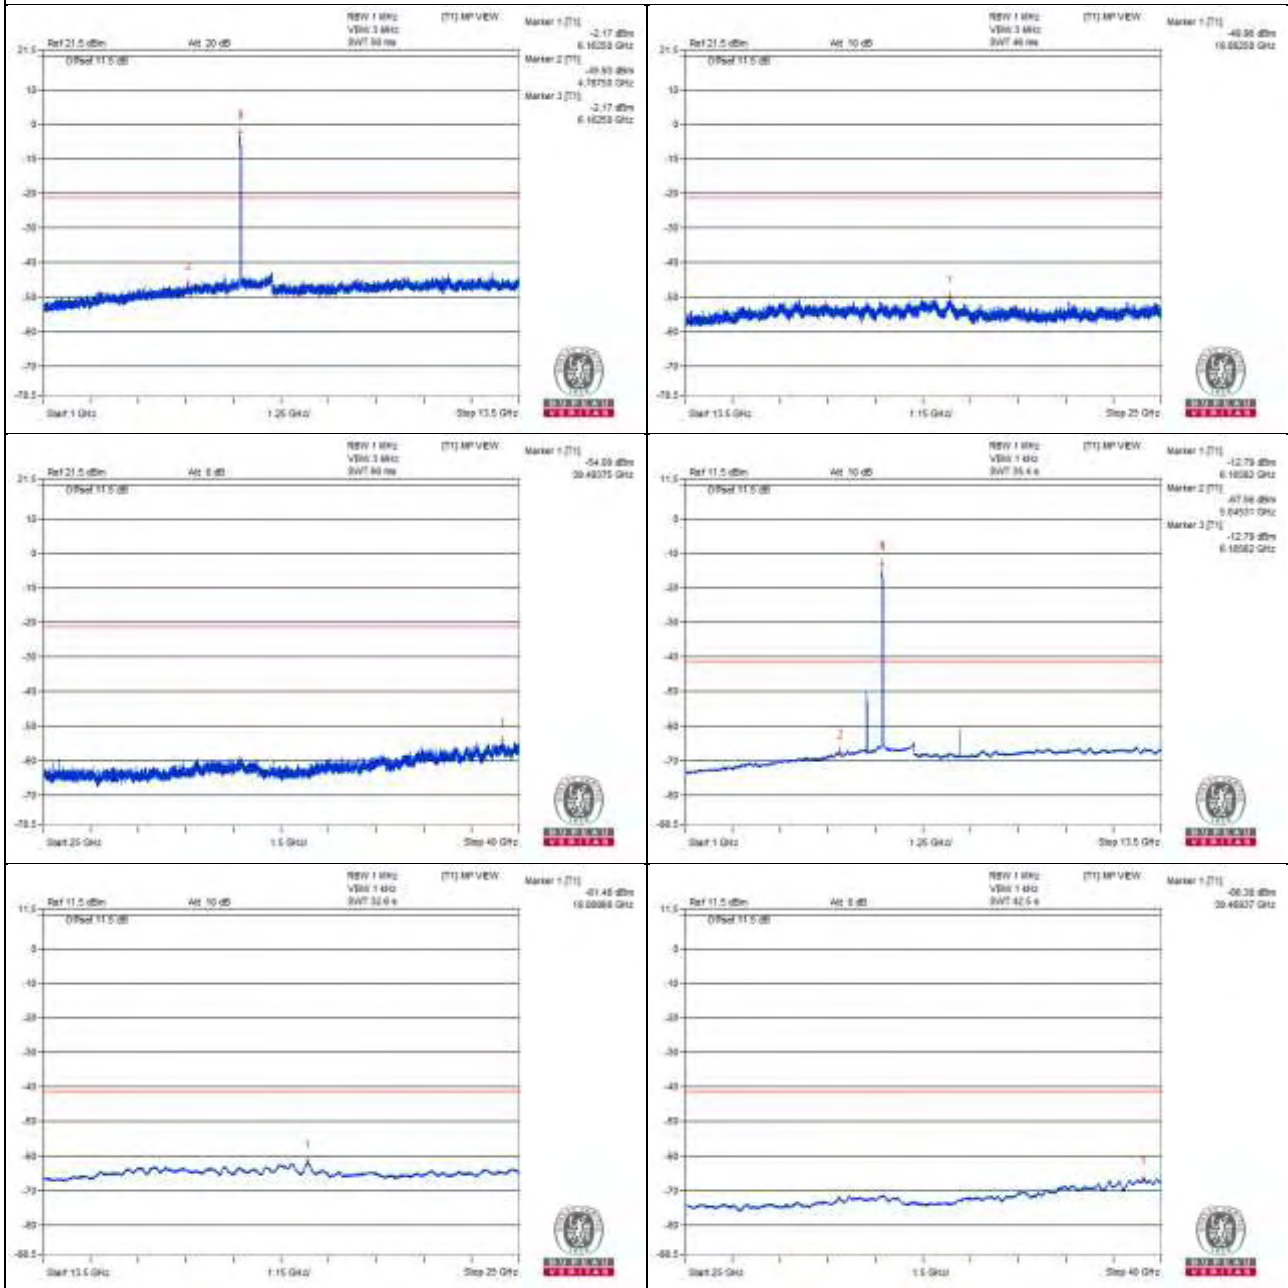

Chain 1

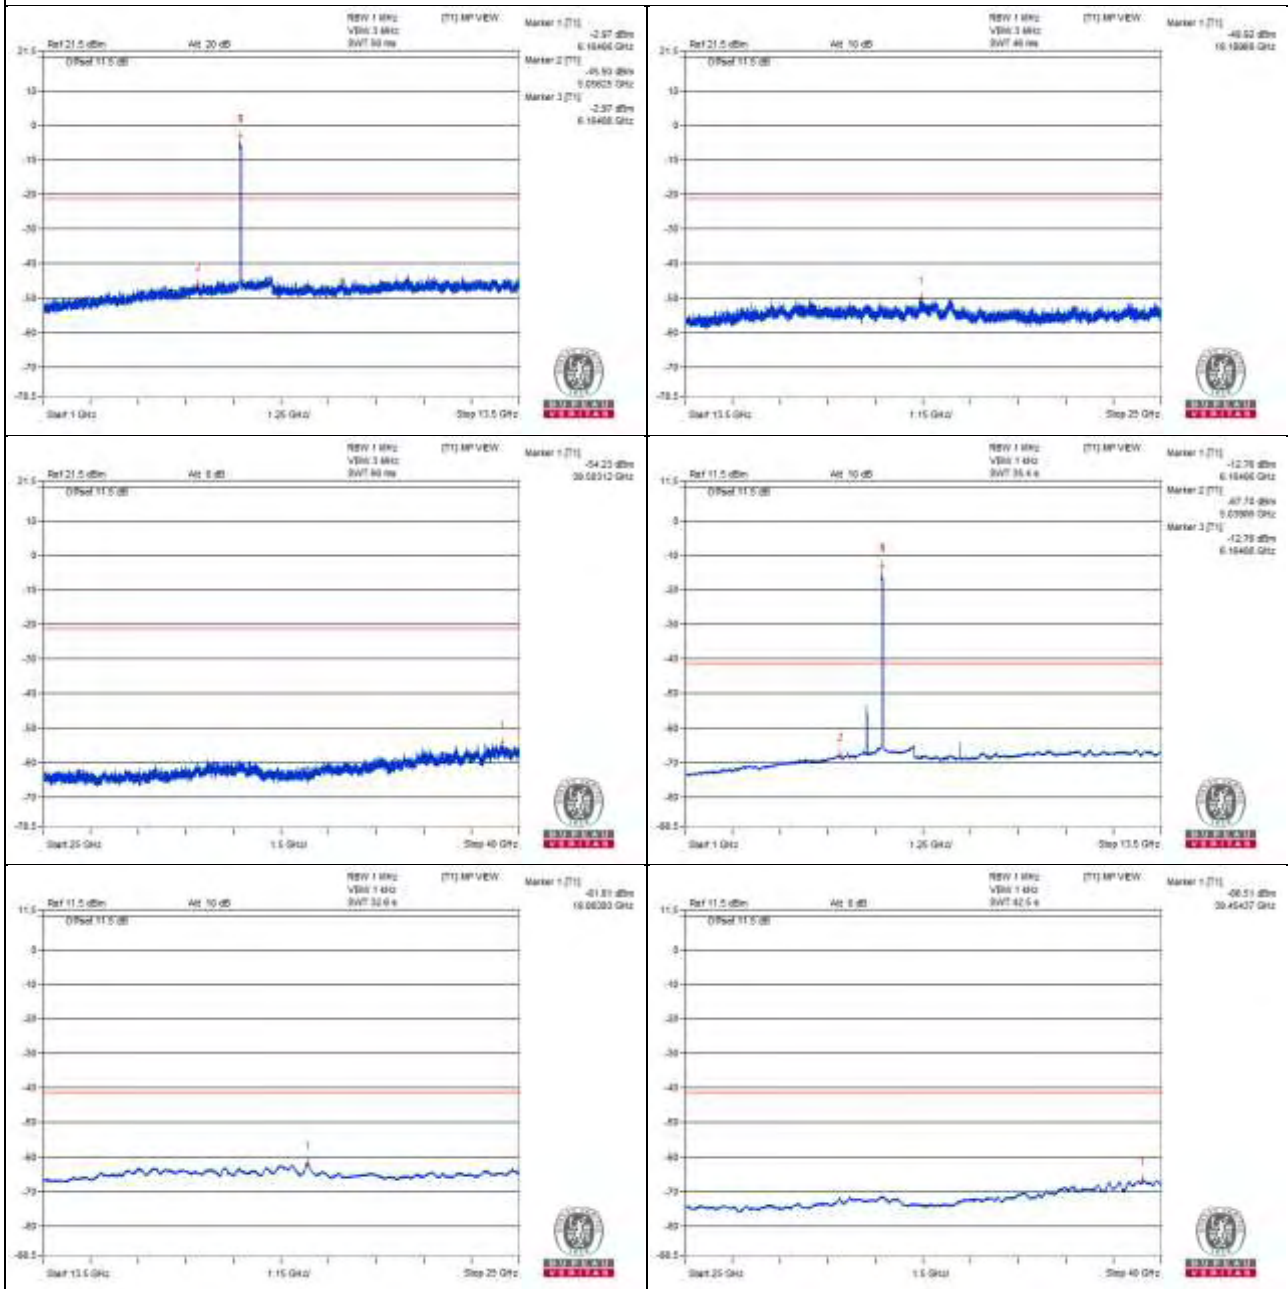

802.11ax (HE40) - Channel 91

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	12803.12 PK	61.8	88.2	-26.4	-43.44	-46.3	8.17	-33.46
2	12818.75 AV	39.72	68.2	-28.48	-66.6	-66.85	8.17	-55.54
3	19221.25 PK	55	74	-19	-51.37	-51.51	8.17	-40.26
4	19221.25 AV	44.16	54	-9.84	-62.29	-62.27	8.17	-51.1

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

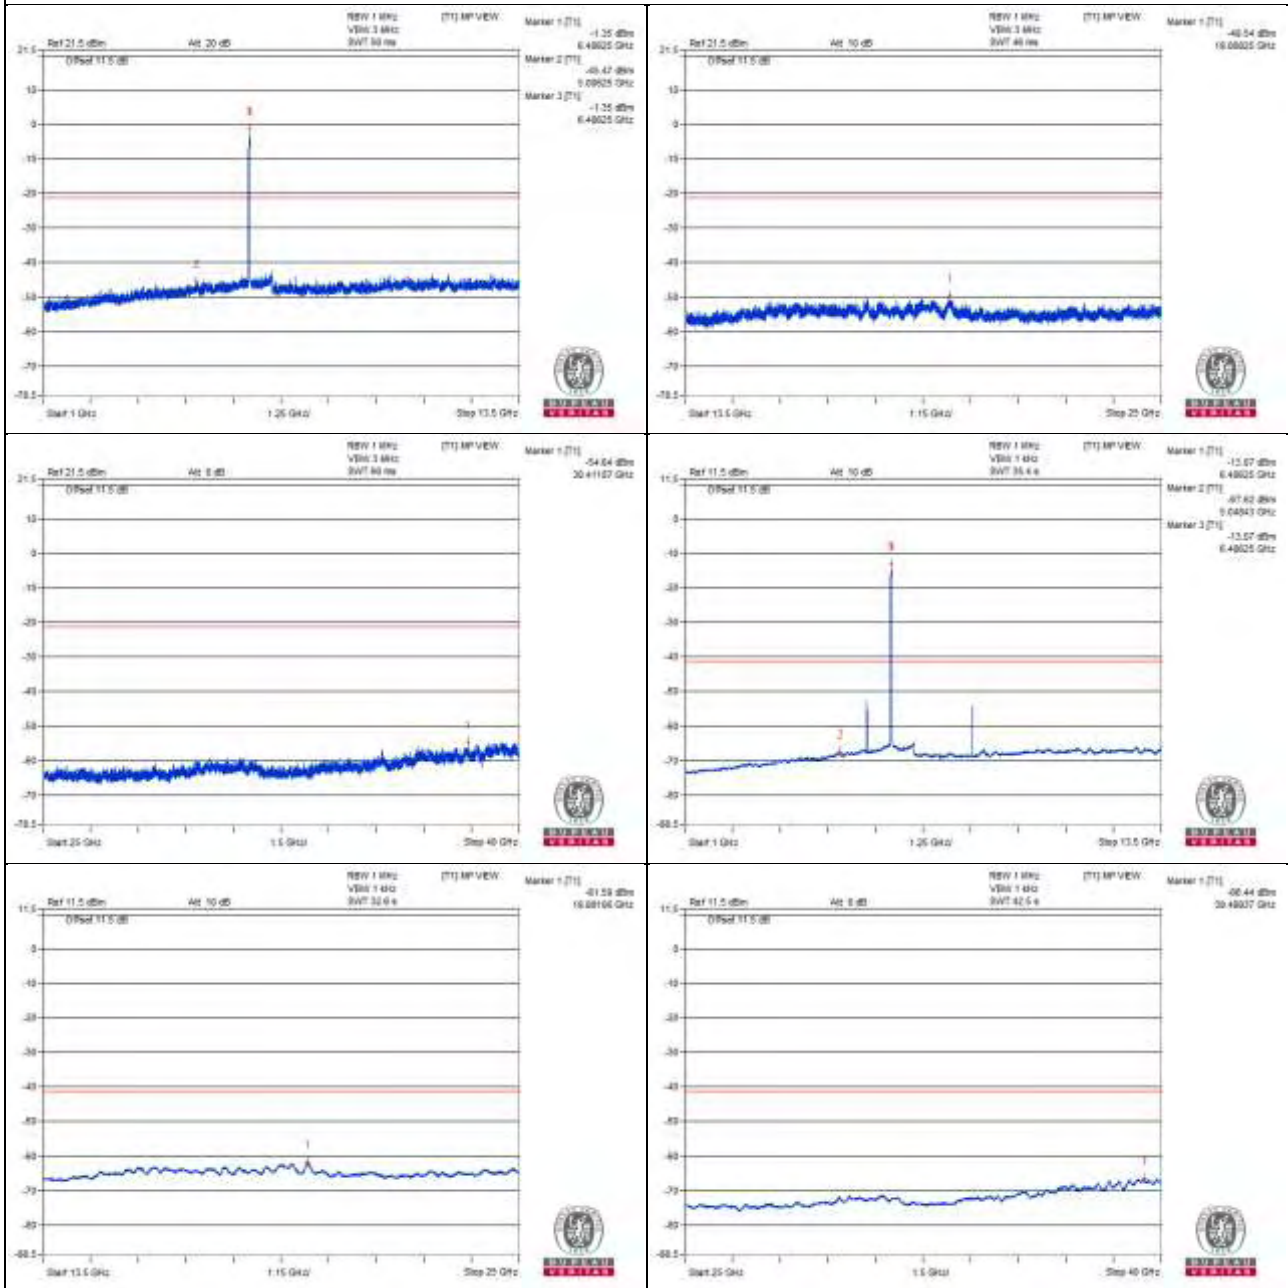

Chain 1

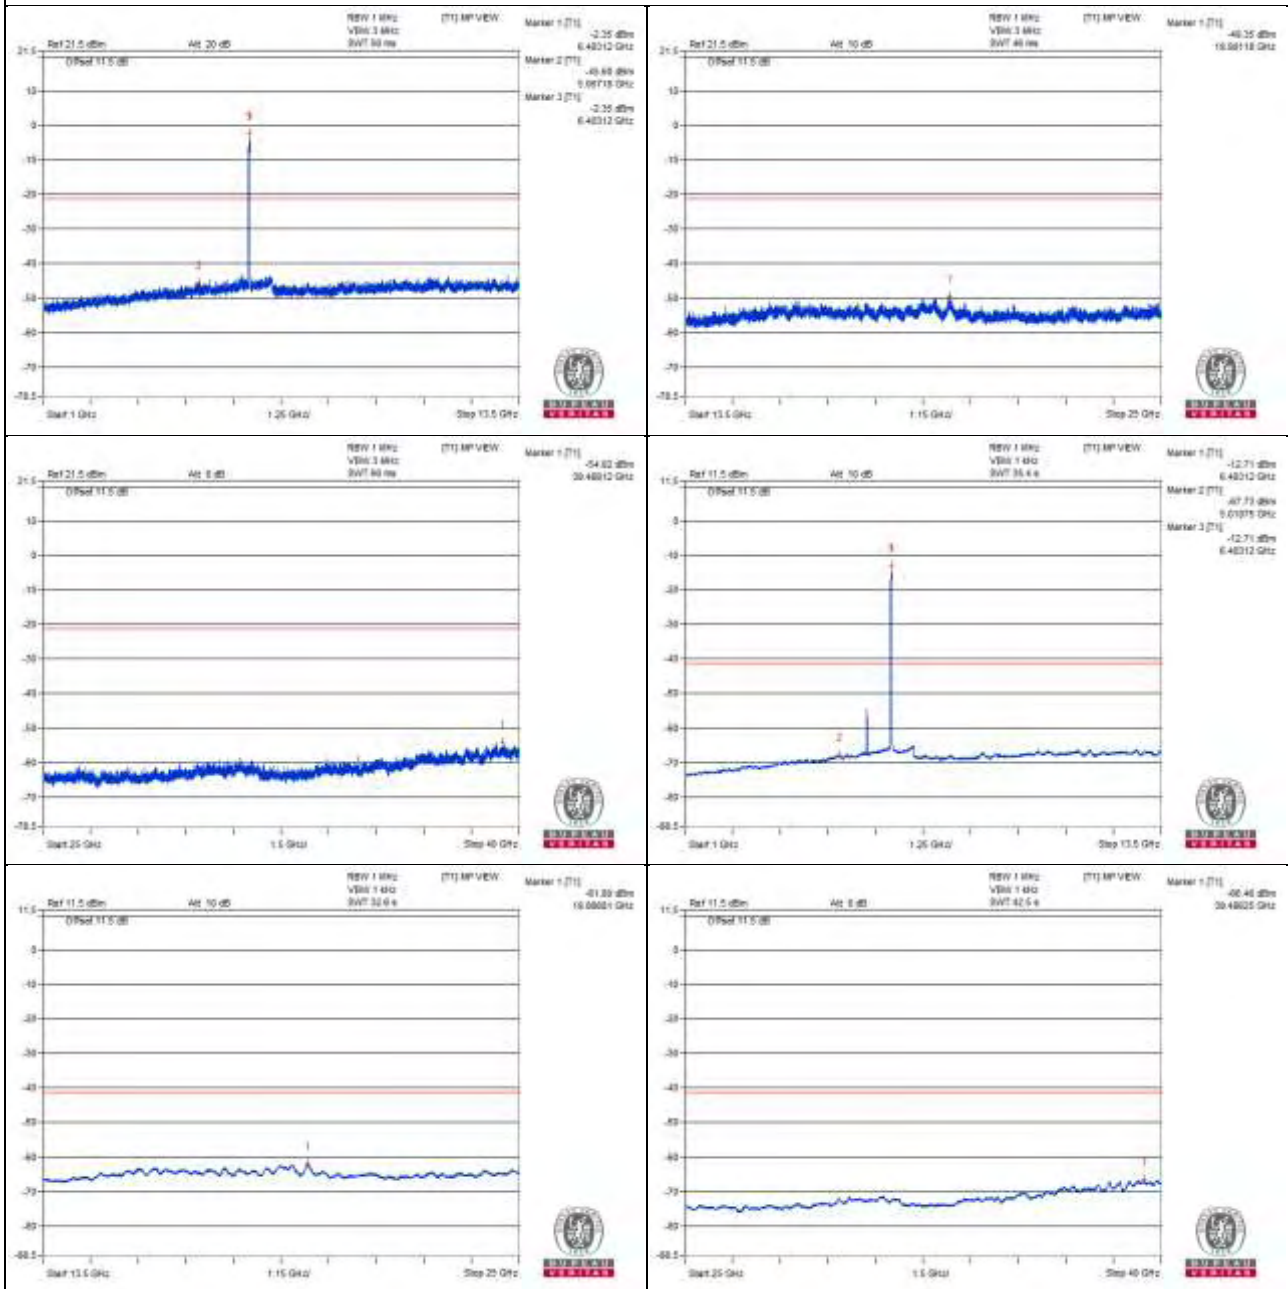

802.11ax (HE40) - Channel 99

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	12887.5 PK	60.99	88.2	-27.21	-44.97	-46	8.17	-34.27
2	12890.62 AV	40.2	68.2	-28	-66.28	-66.2	8.17	-55.06
3	19340.56 PK	54.73	74	-19.27	-50.86	-52.76	8.17	-40.53
4	19327.62 AV	43.51	54	-10.49	-62.85	-63.01	8.17	-51.75

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

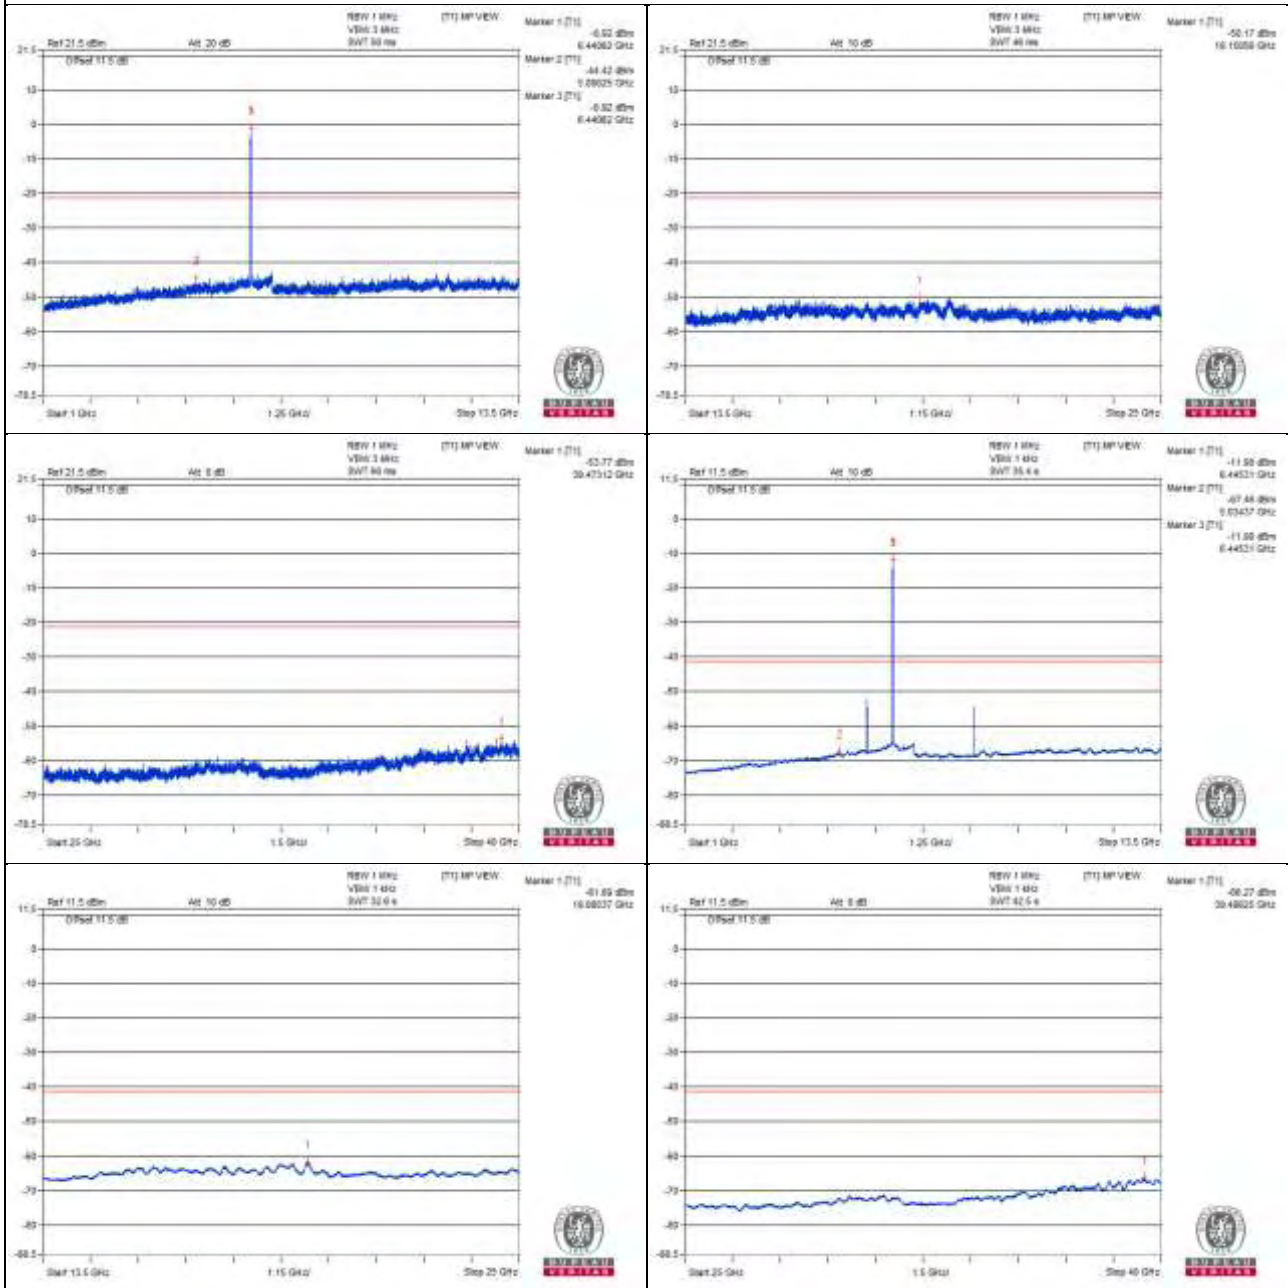

Chain 1

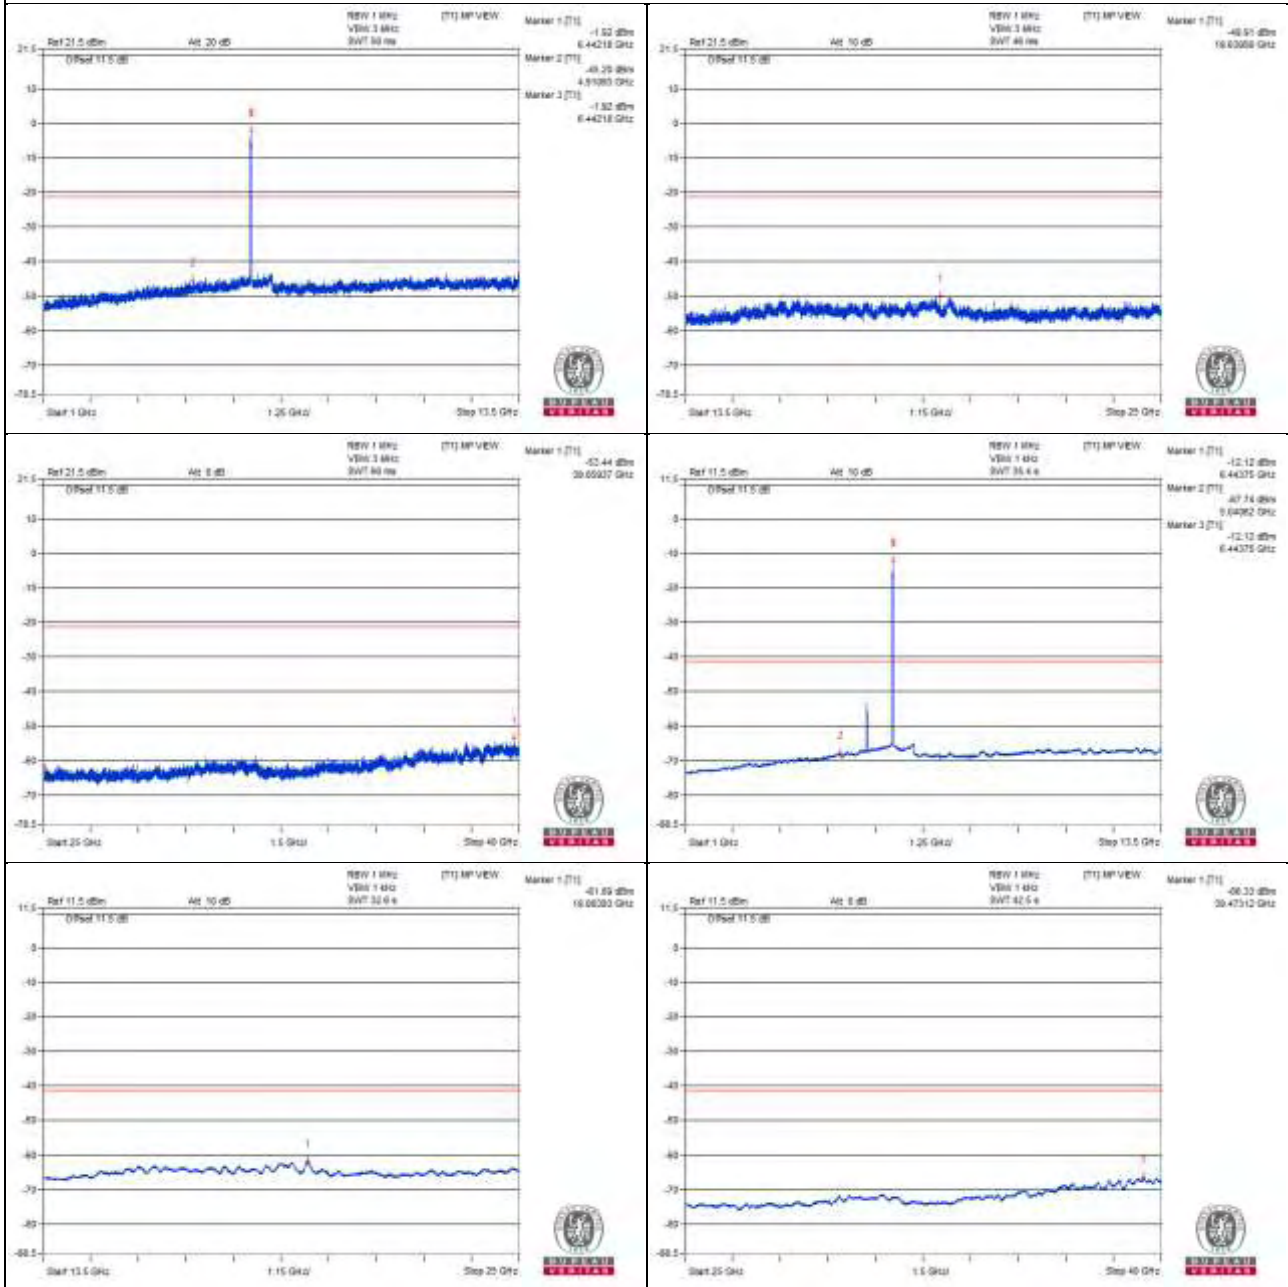

802.11ax (HE40) - Channel 107

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	12975 PK	60.7	88.2	-27.5	-45.48	-46.01	8.17	-34.56
2	12965.62 AV	38.9	68.2	-29.3	-67.57	-67.52	8.17	-56.36
3	19448.37 PK	54.63	74	-19.37	-52.43	-51.26	8.17	-40.63
4	19462.75 AV	43.69	54	-10.31	-62.78	-62.73	8.17	-51.57

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

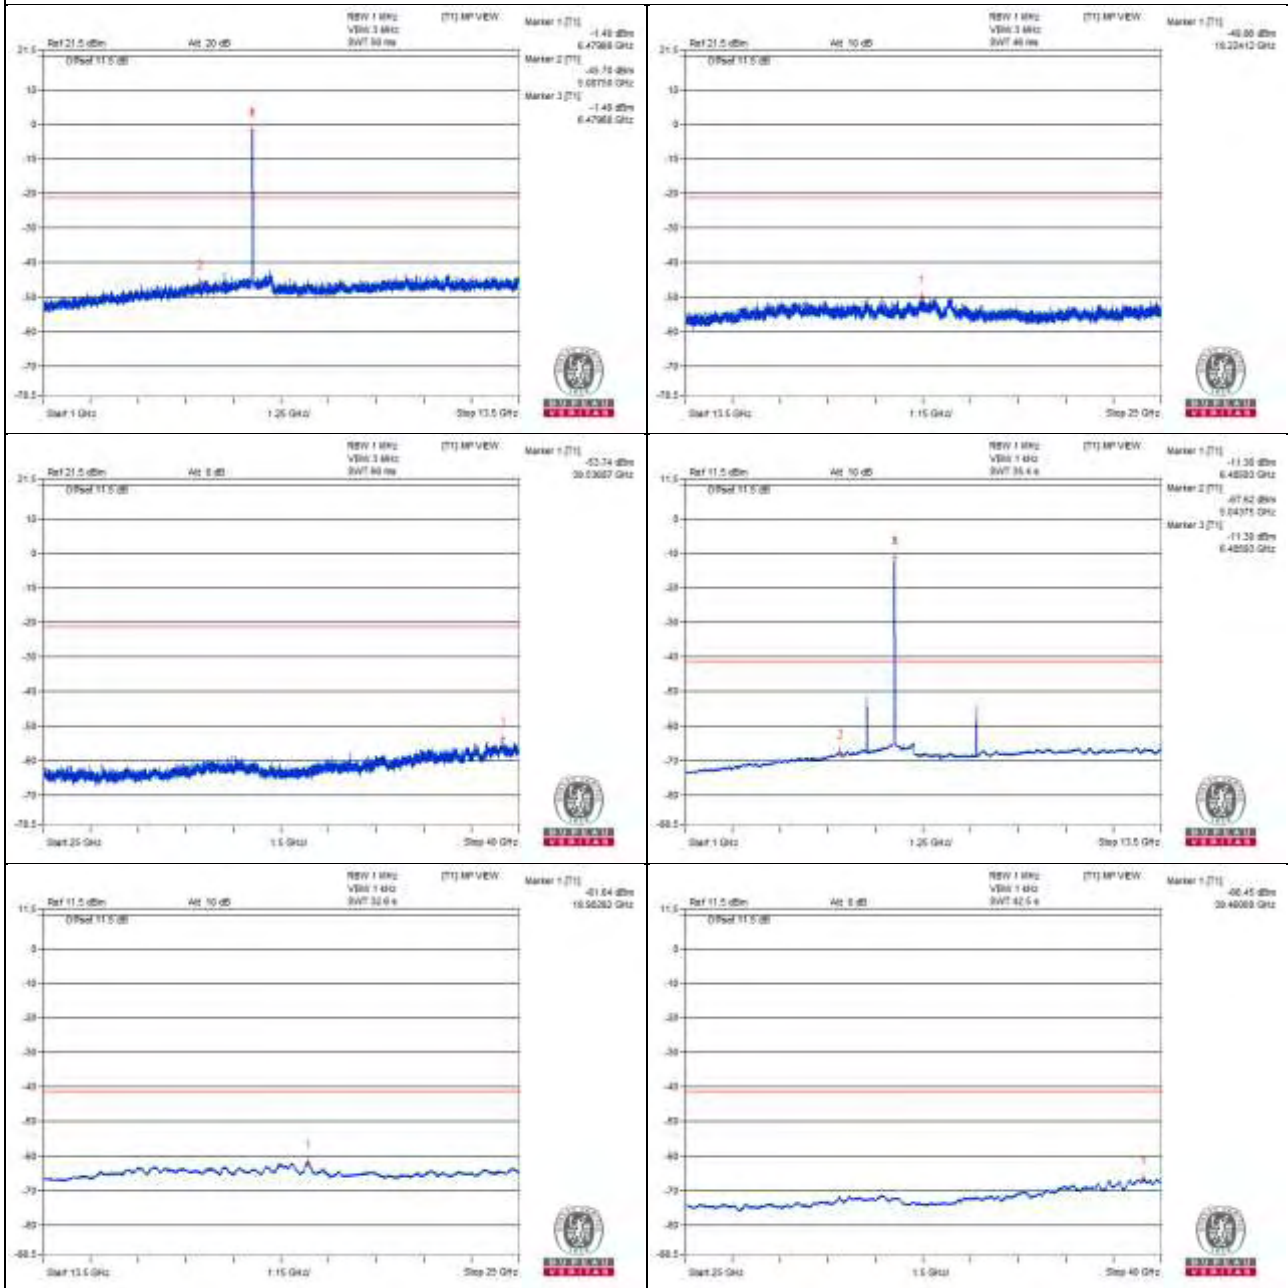

Chain 1

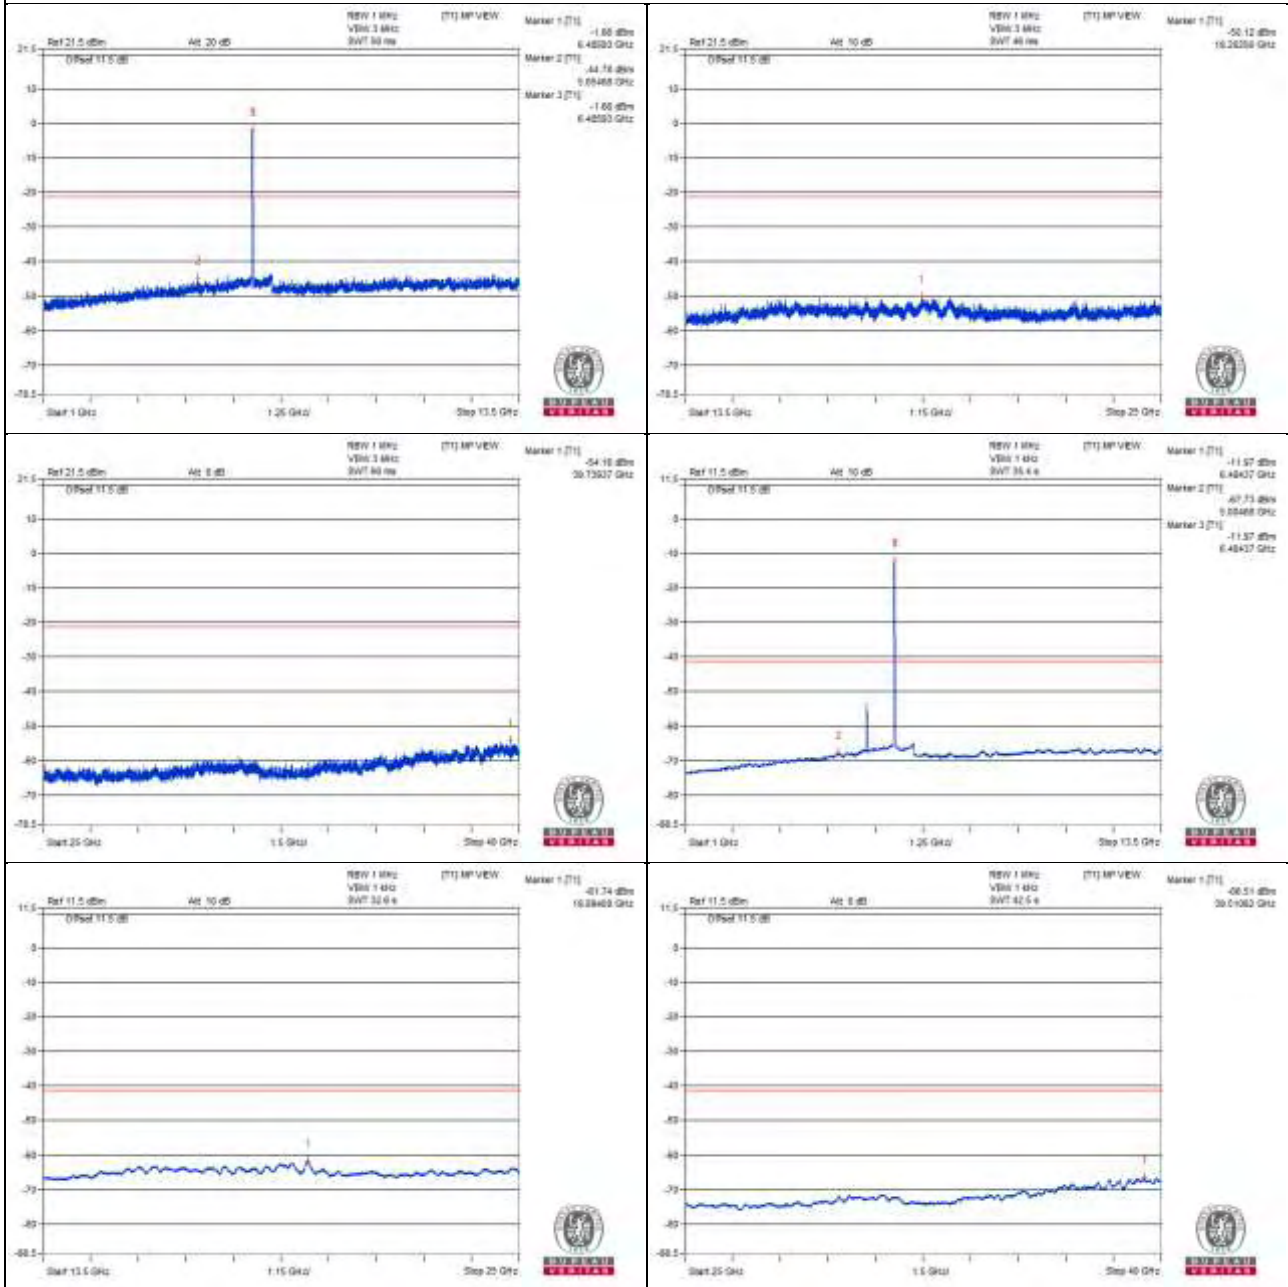

802.11ax (HE40) - Channel 115

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	13054.68 PK	61.07	88.2	-27.13	-46.42	-44.53	8.17	-34.19
2	13048.43 AV	39.35	68.2	-28.85	-67.01	-67.18	8.17	-55.91
3	19572 PK	54.34	74	-19.66	-51.5	-52.8	8.17	-40.92
4	19572 AV	43.26	54	-10.74	-63.09	-63.27	8.17	-52

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

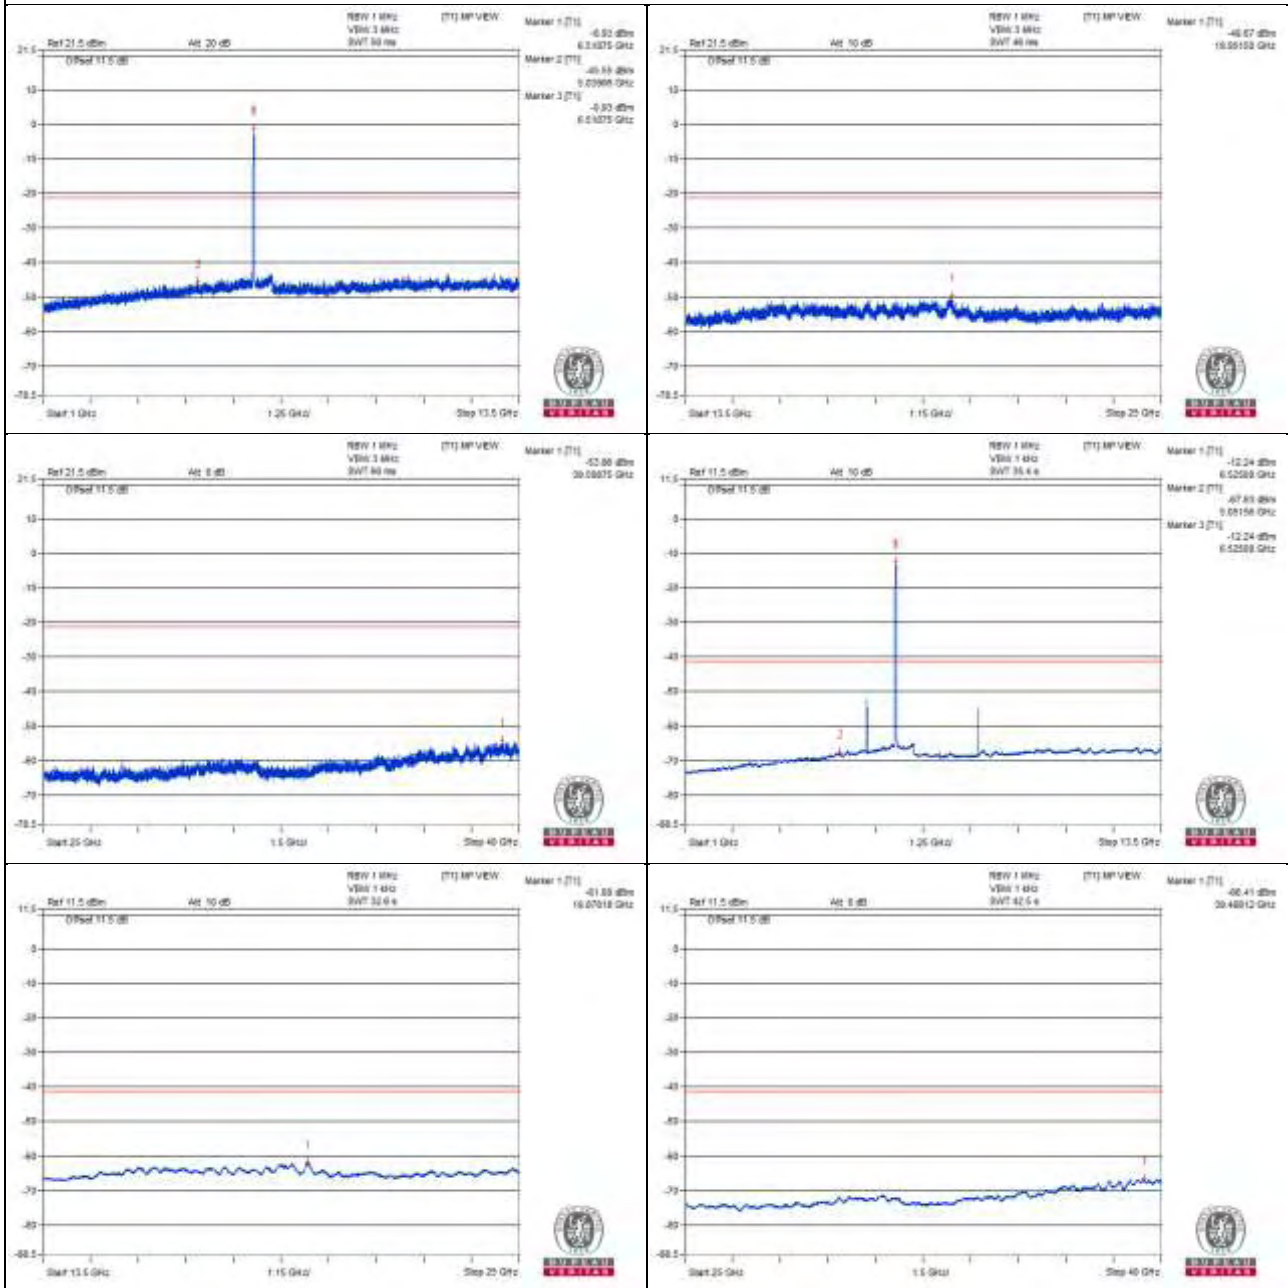

Chain 1

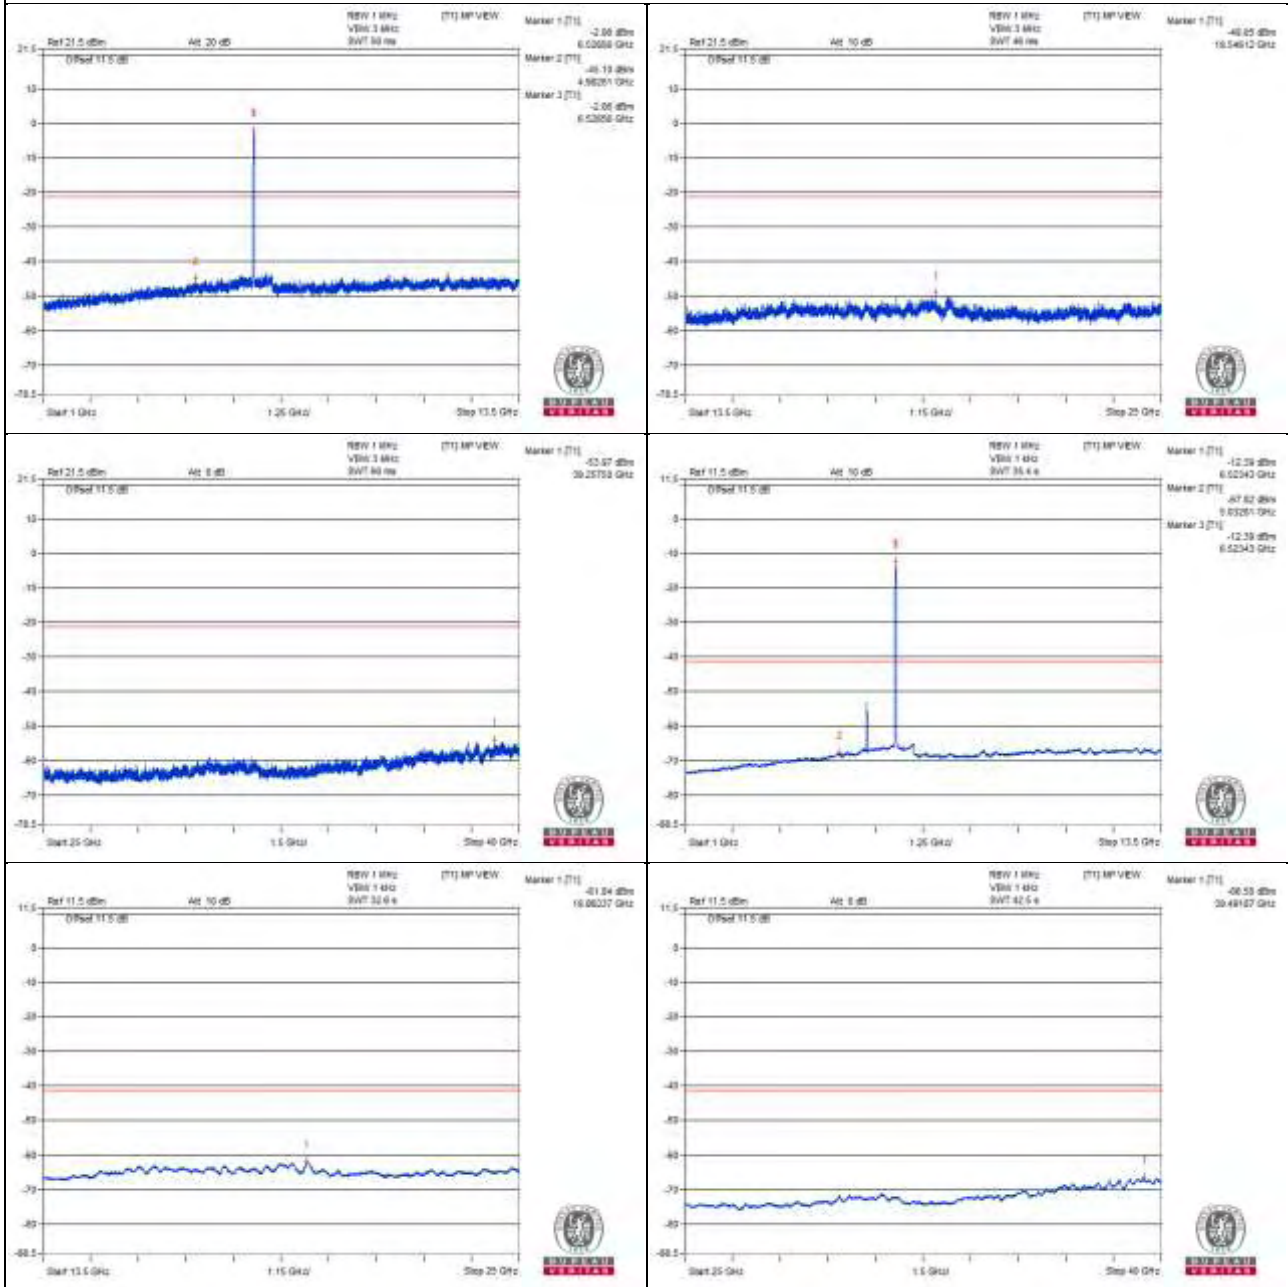

802.11ax (HE40) - Channel 123

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	13125 PK	61.14	88.2	-27.06	-44.79	-45.87	8.17	-34.12
2	13126.56 AV	39.57	68.2	-28.63	-66.73	-67.01	8.17	-55.69
3	19699.93 PK	52.92	74	-21.08	-53.78	-53.28	8.17	-42.34
4	19698.5 AV	41.51	54	-12.49	-64.82	-65.04	8.17	-53.75

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

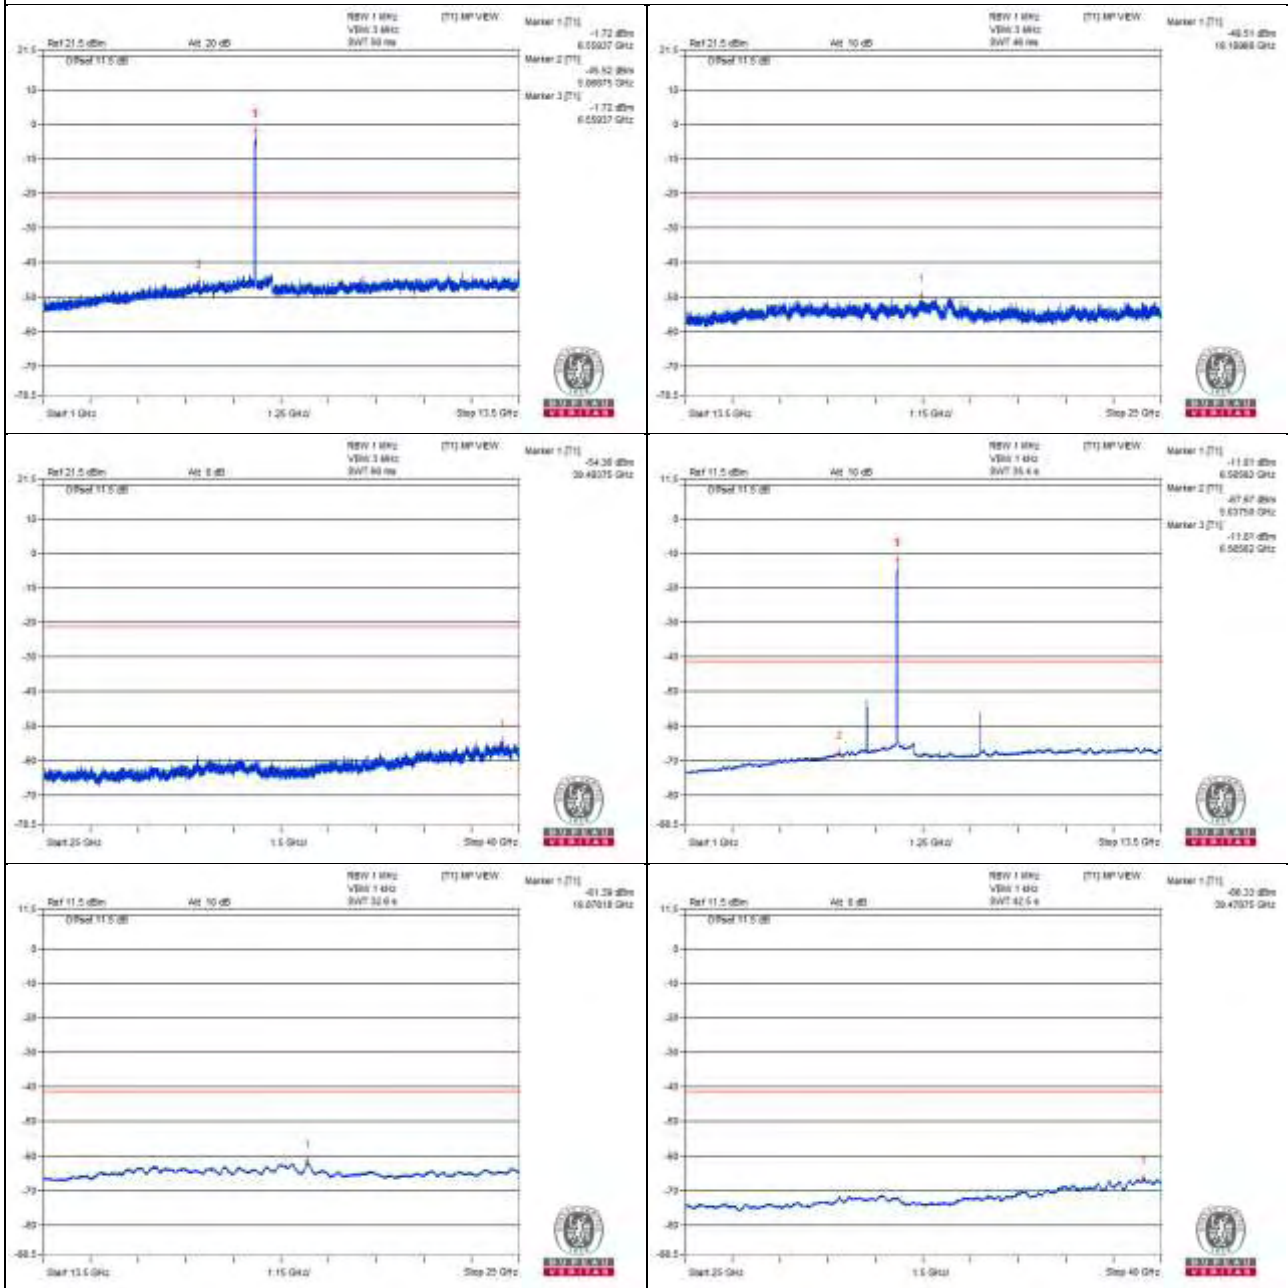

Chain 1

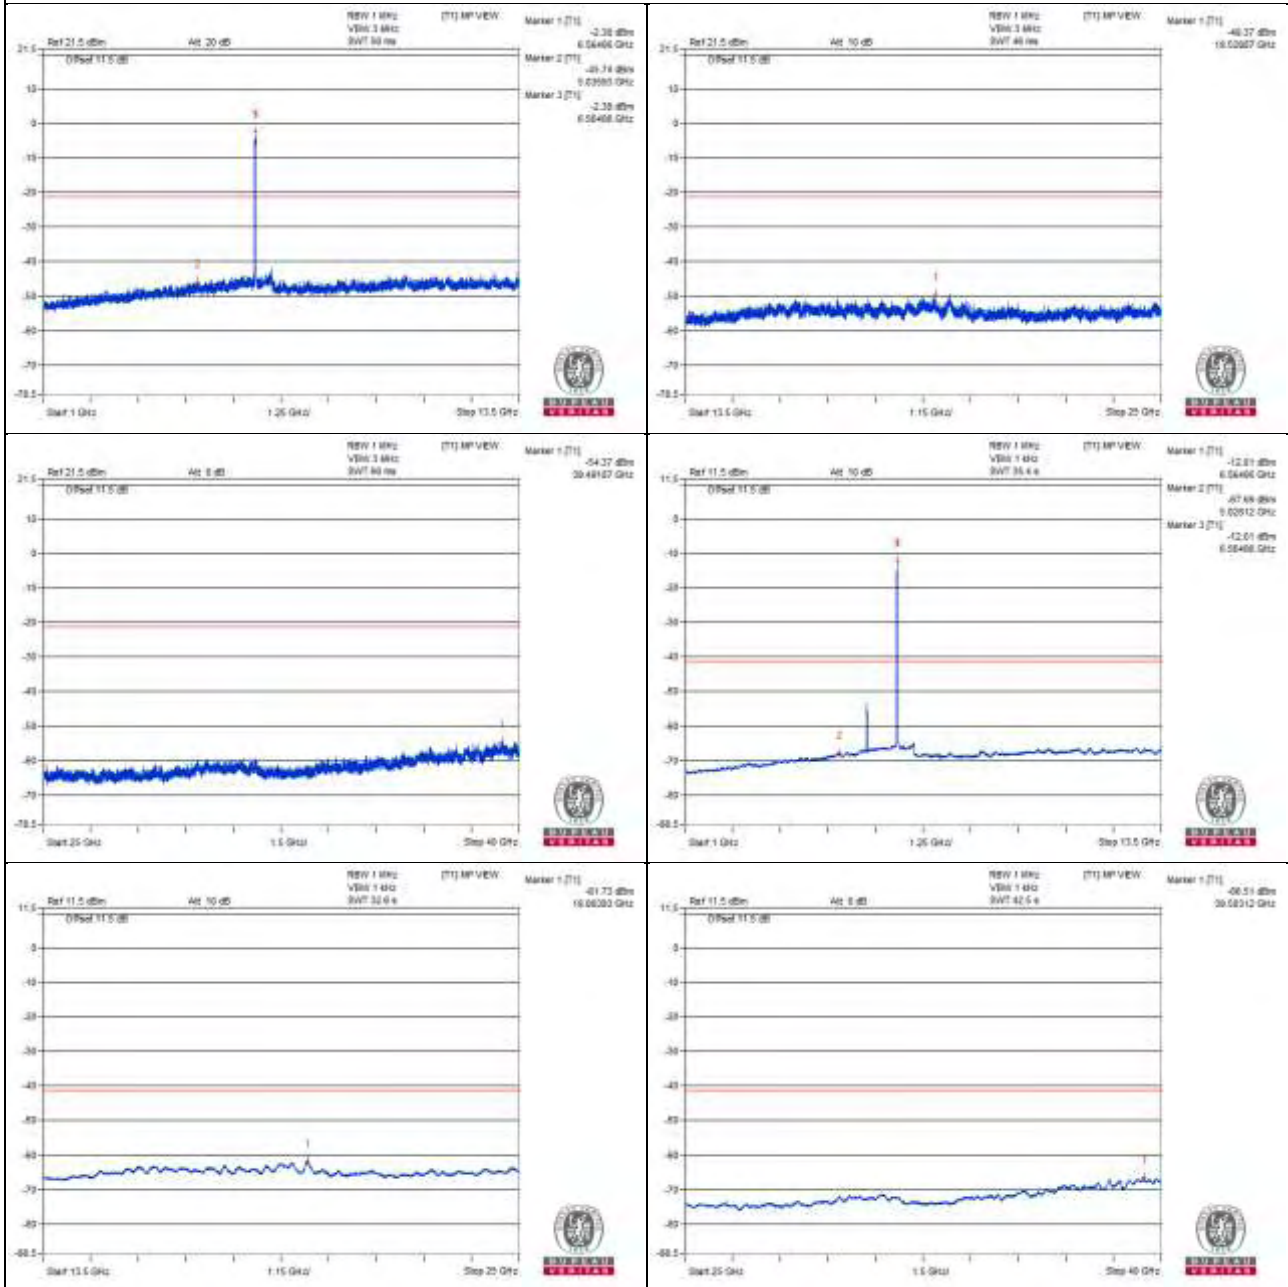

802.11ax (HE40) - Channel 155

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	13451.56 PK	60.53	88.2	-27.67	-45.65	-46.18	8.17	-34.73
2	13453.12 AV	39.33	68.2	-28.87	-67.07	-67.15	8.17	-55.93
3	20167.12 PK	52.2	74	-21.8	-52.92	-56.14	8.17	-43.06
4	20174.31 AV	41.82	54	-12.18	-64.33	-64.93	8.17	-53.44

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

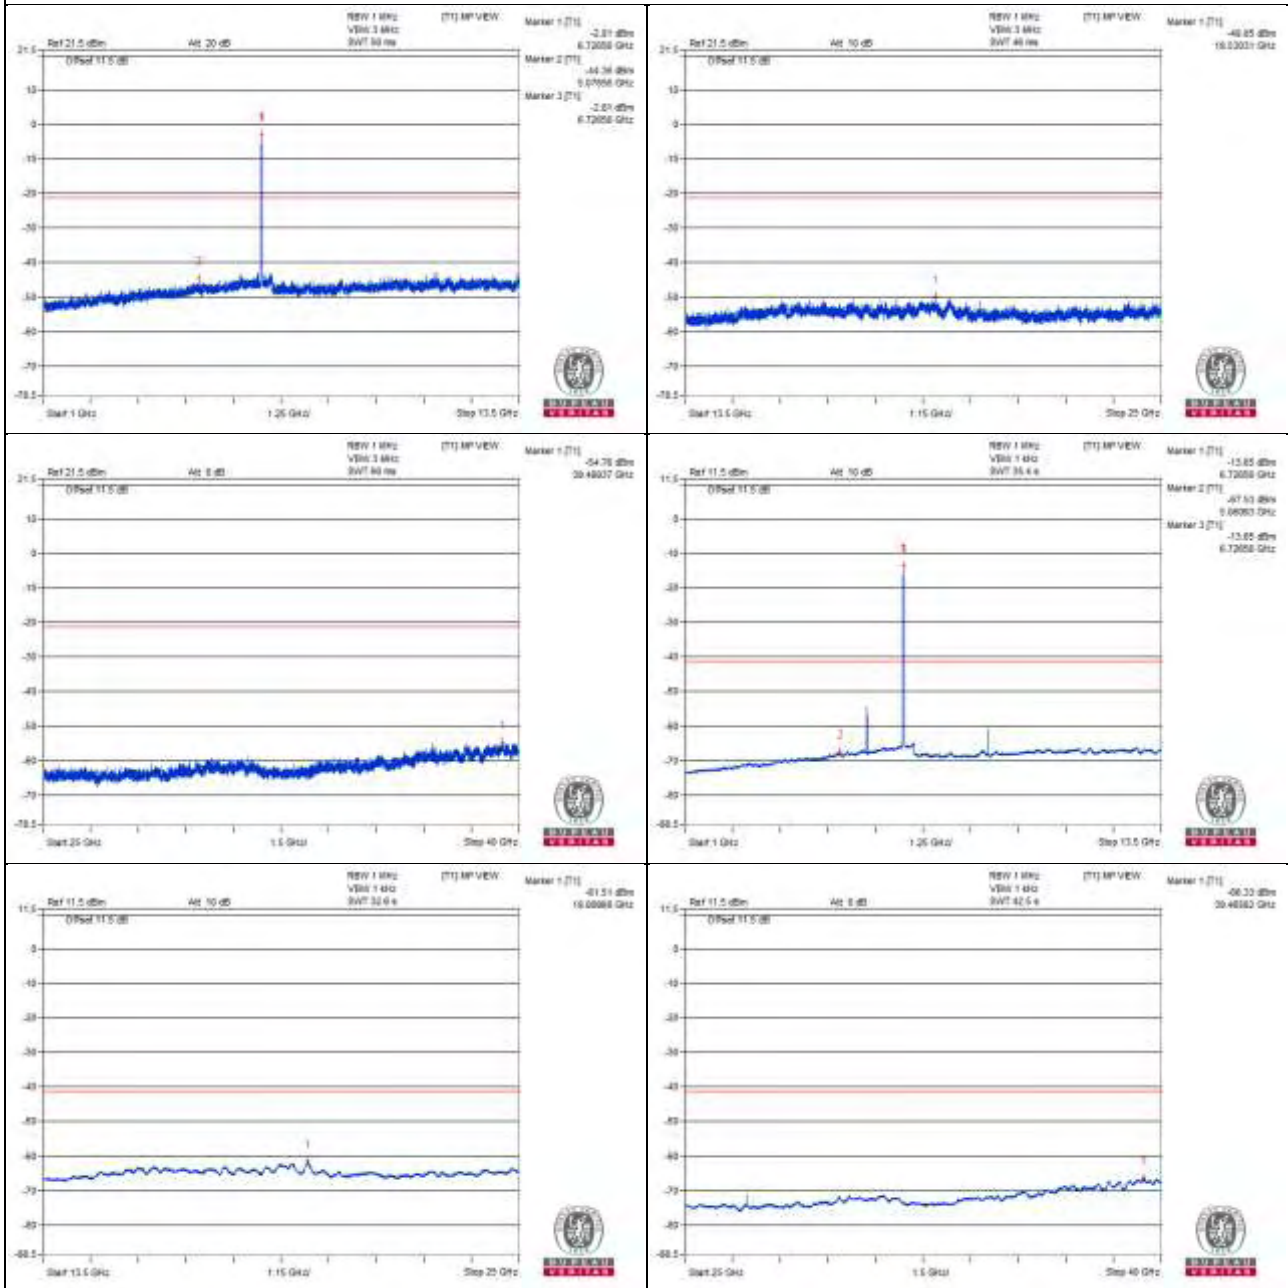

Chain 1

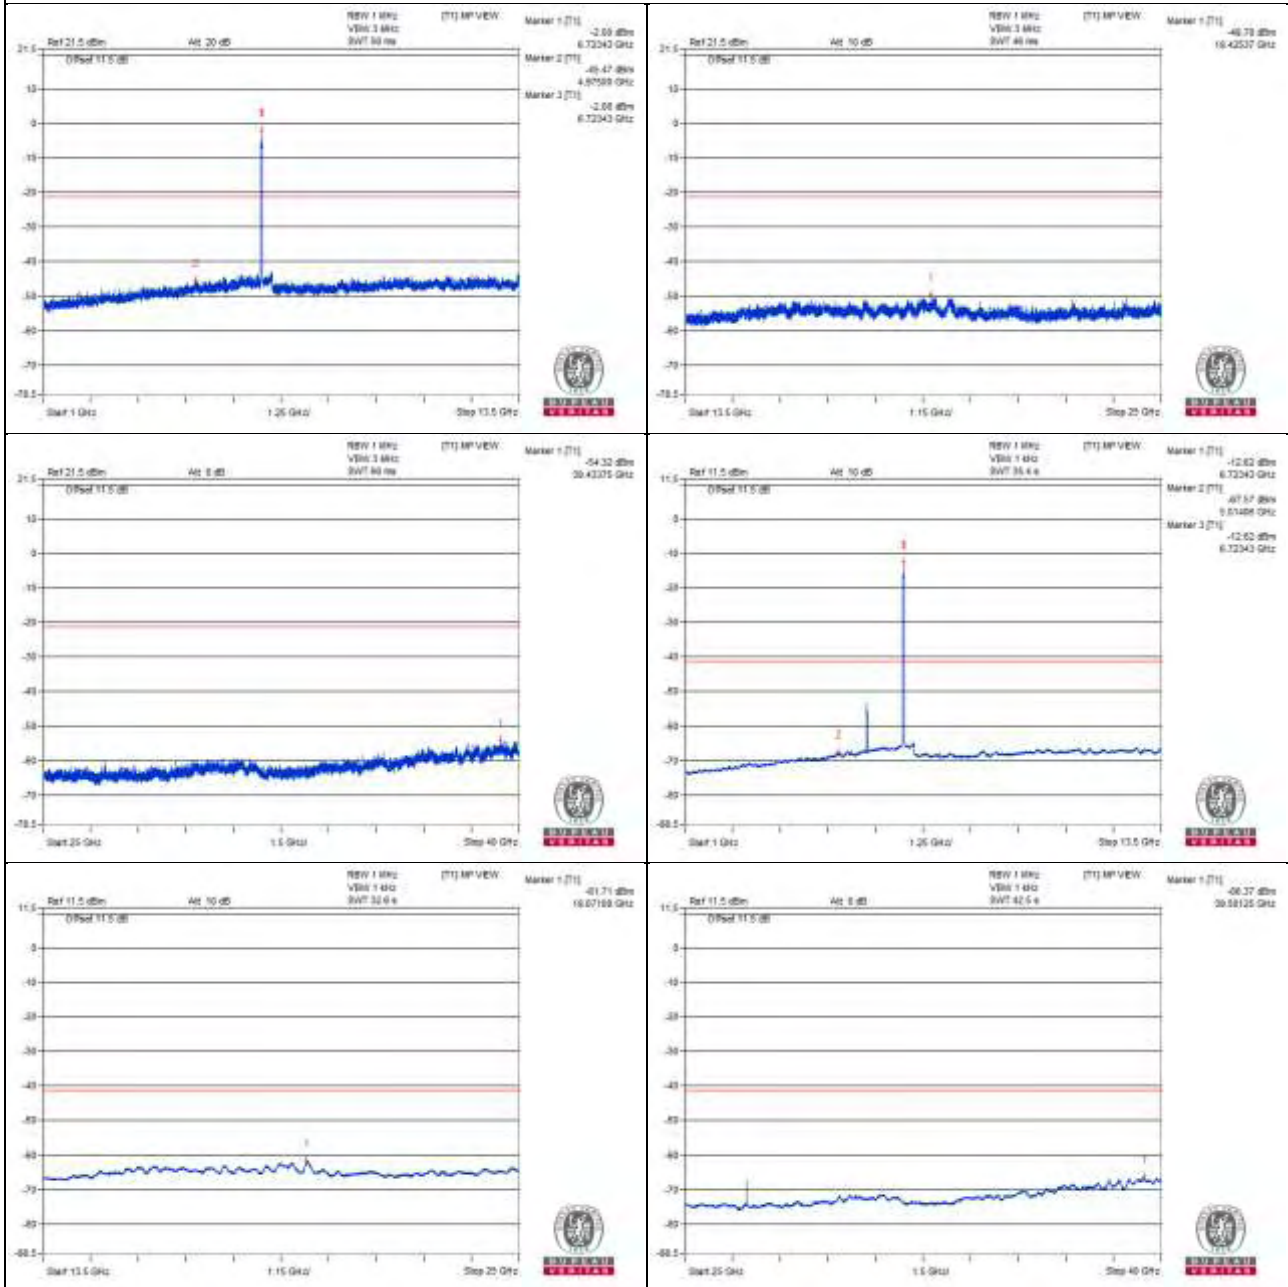

802.11ax (HE40) - Channel 179

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	13692.62 PK	51	88.2	-37.2	-56.01	-54.94	8.17	-44.26
2	13689.75 AV	39.74	68.2	-28.46	-66.78	-66.62	8.17	-55.52
3	20540.87 PK	51.84	74	-22.16	-55.73	-53.71	8.17	-43.42
4	20538 AV	41.08	54	-12.92	-65.36	-65.36	8.17	-54.18

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

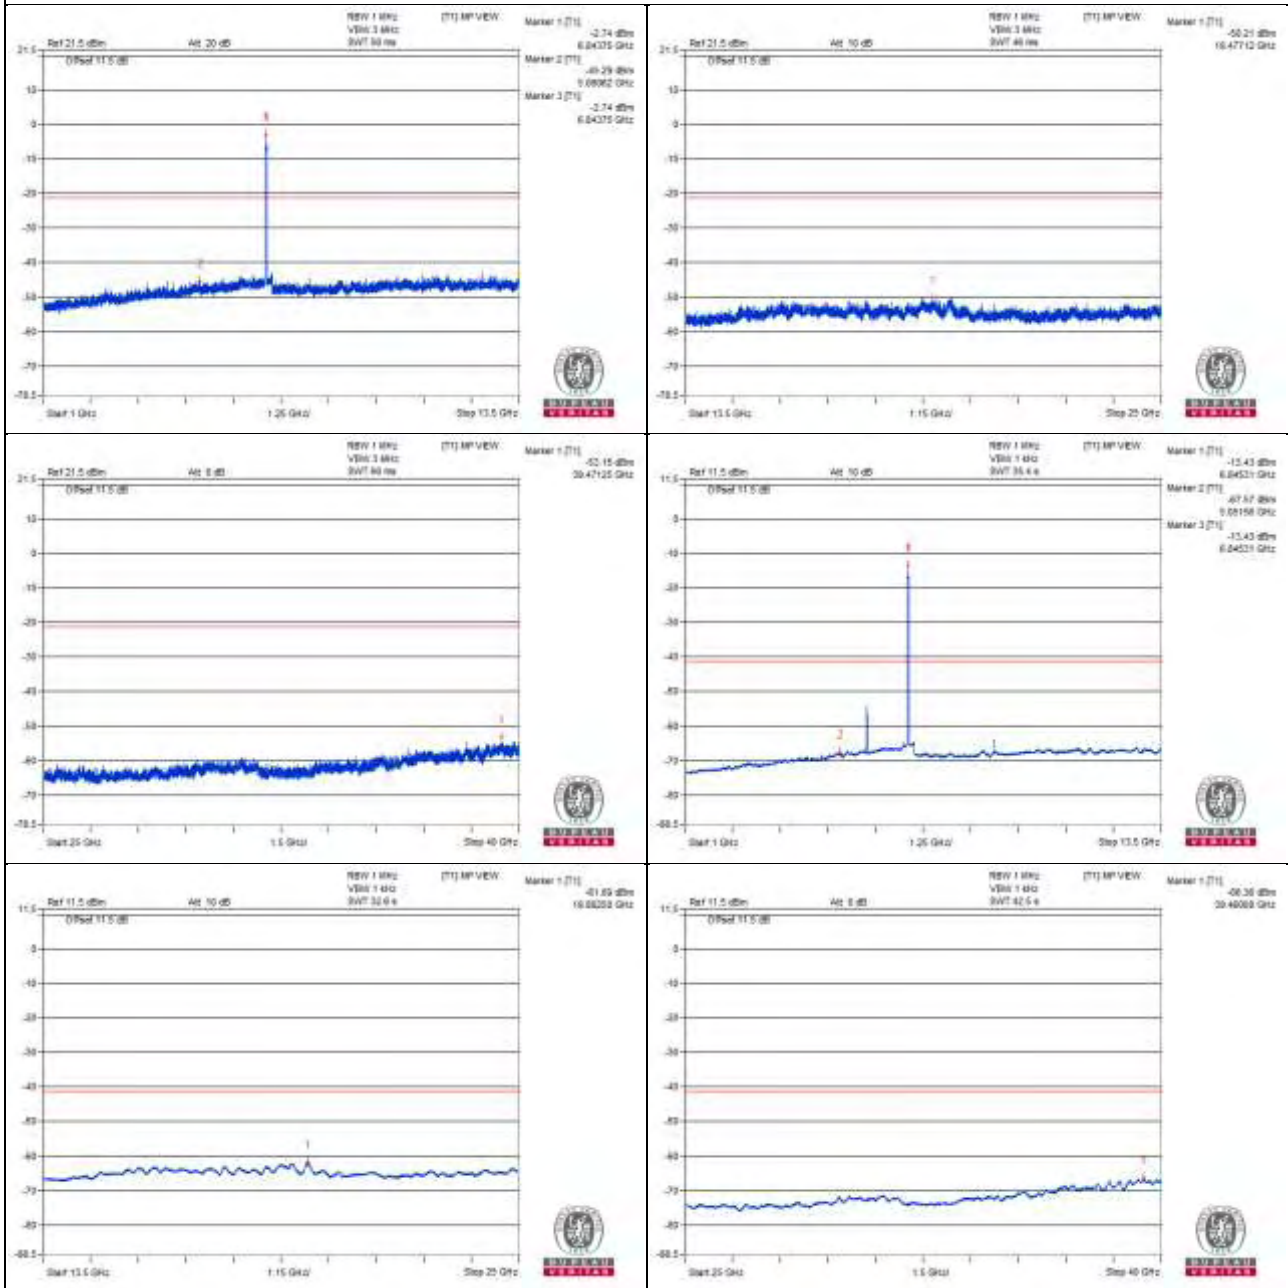

Chain 1

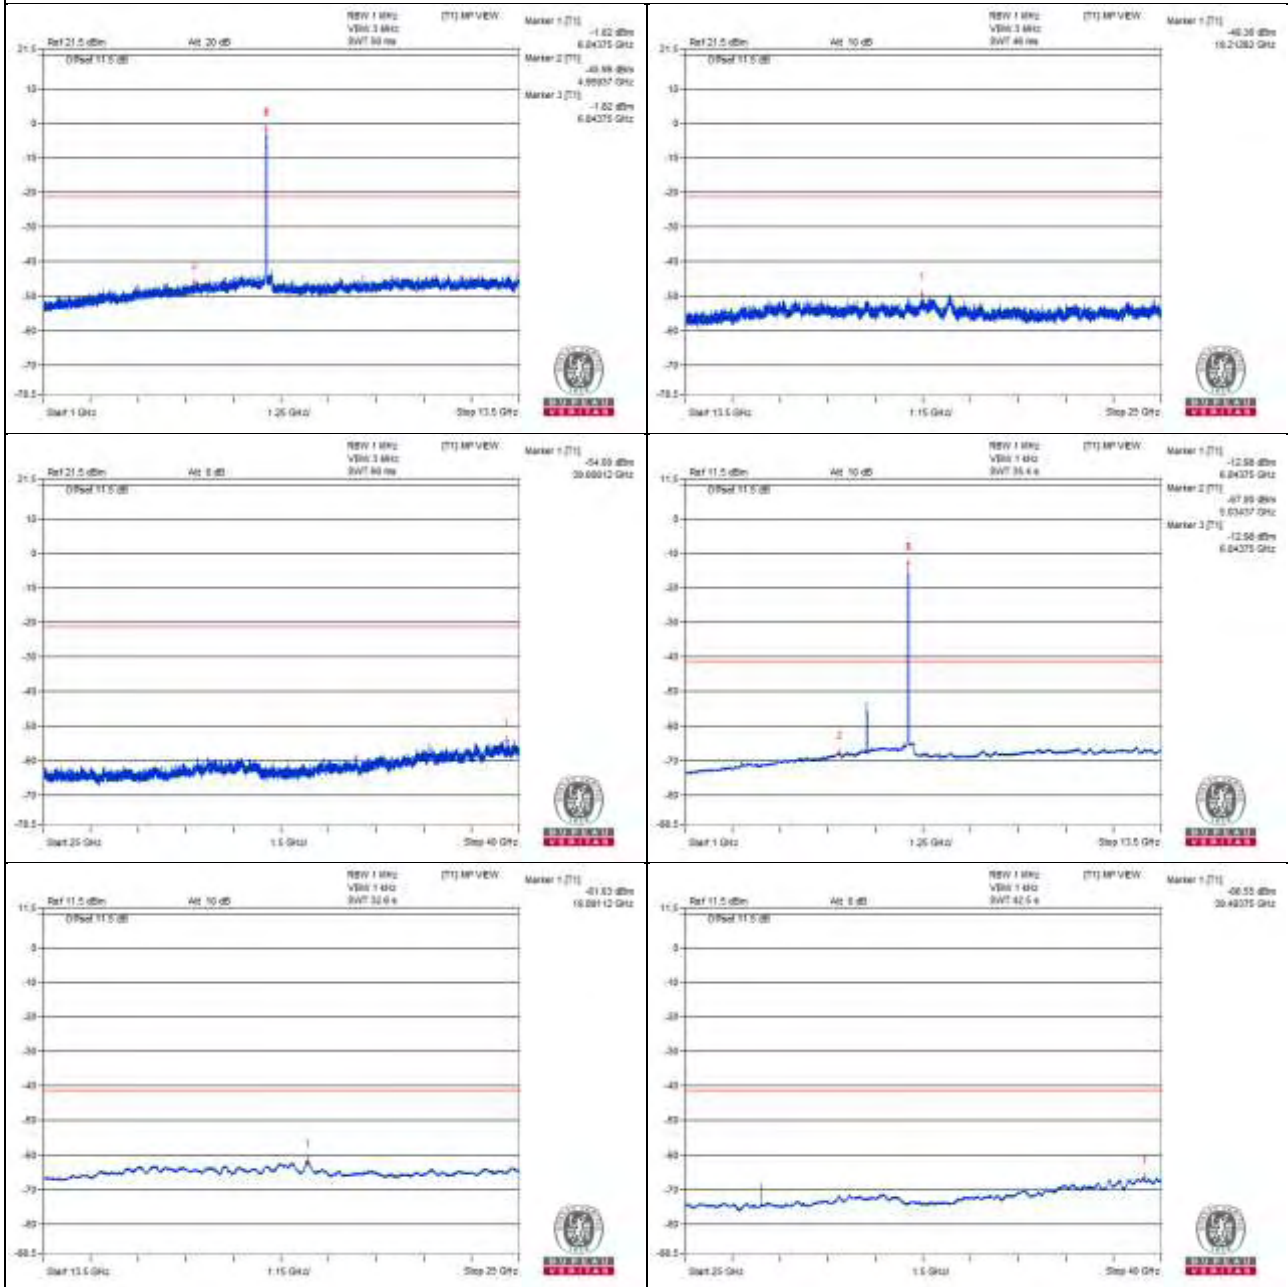

802.11ax (HE40) - Channel 187

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	13765.93 PK	50.99	88.2	-37.21	-54.07	-57.5	8.17	-44.27
2	13768.81 AV	39.91	68.2	-28.29	-66.76	-66.31	8.17	-55.35
3	20655.87 PK	52.7	74	-21.3	-52.83	-54.9	8.17	-42.56
4	20654.43 AV	41.83	54	-12.17	-64.47	-64.76	8.17	-53.43

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

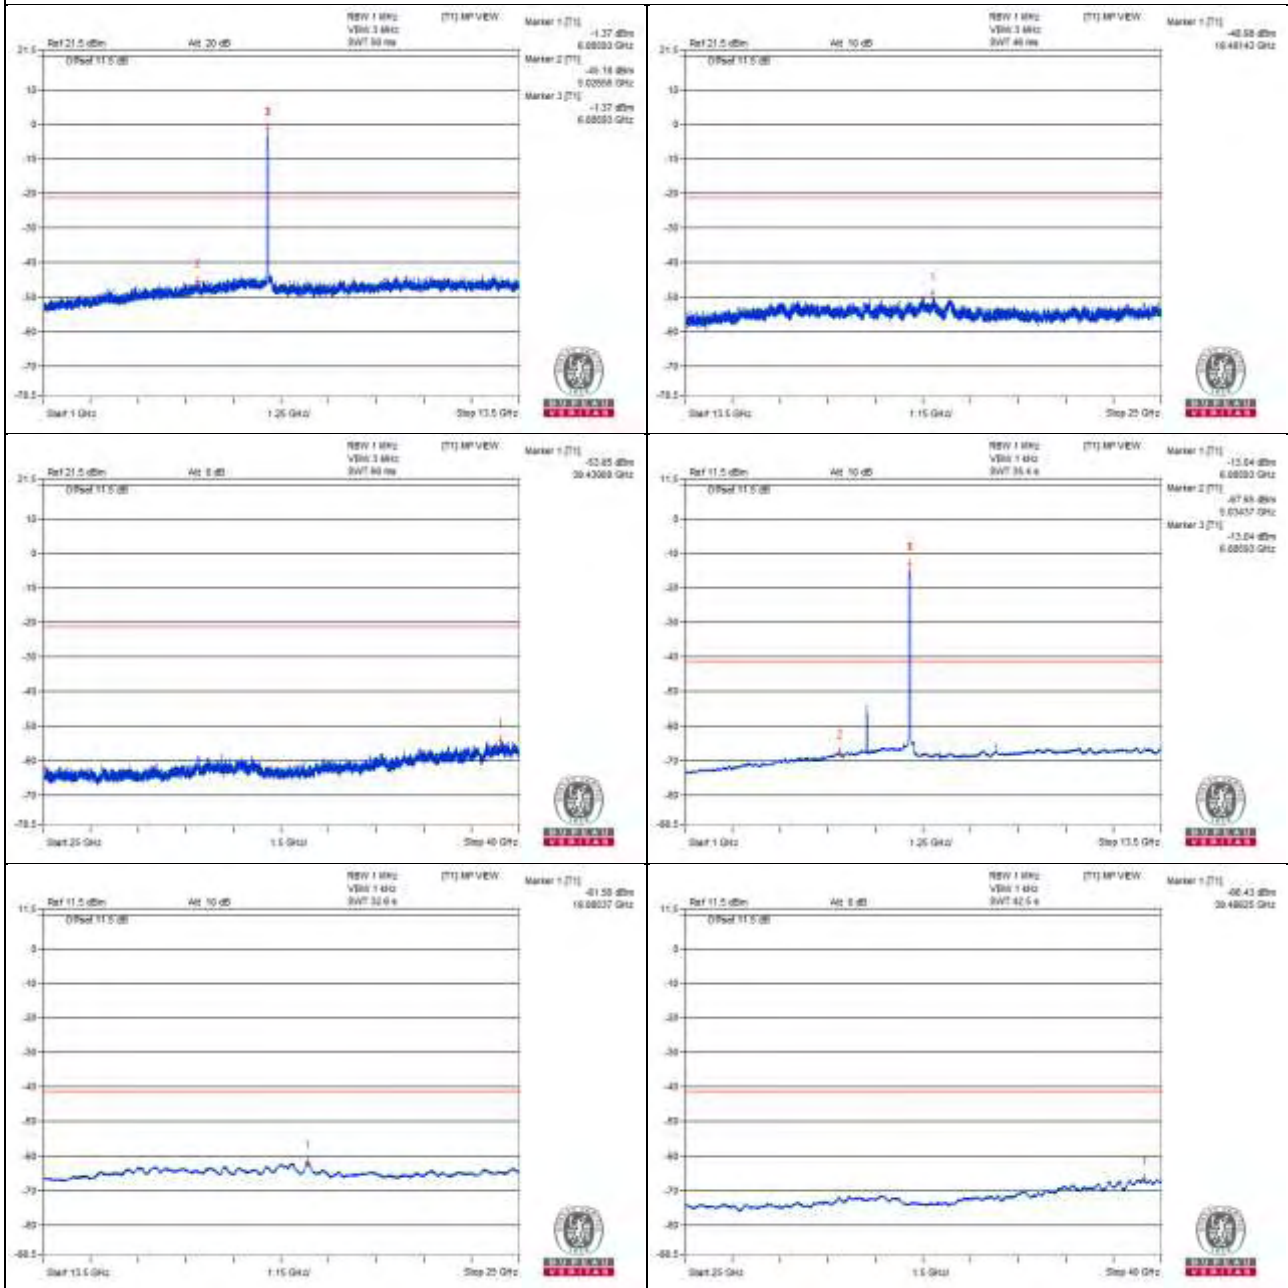

Chain 1

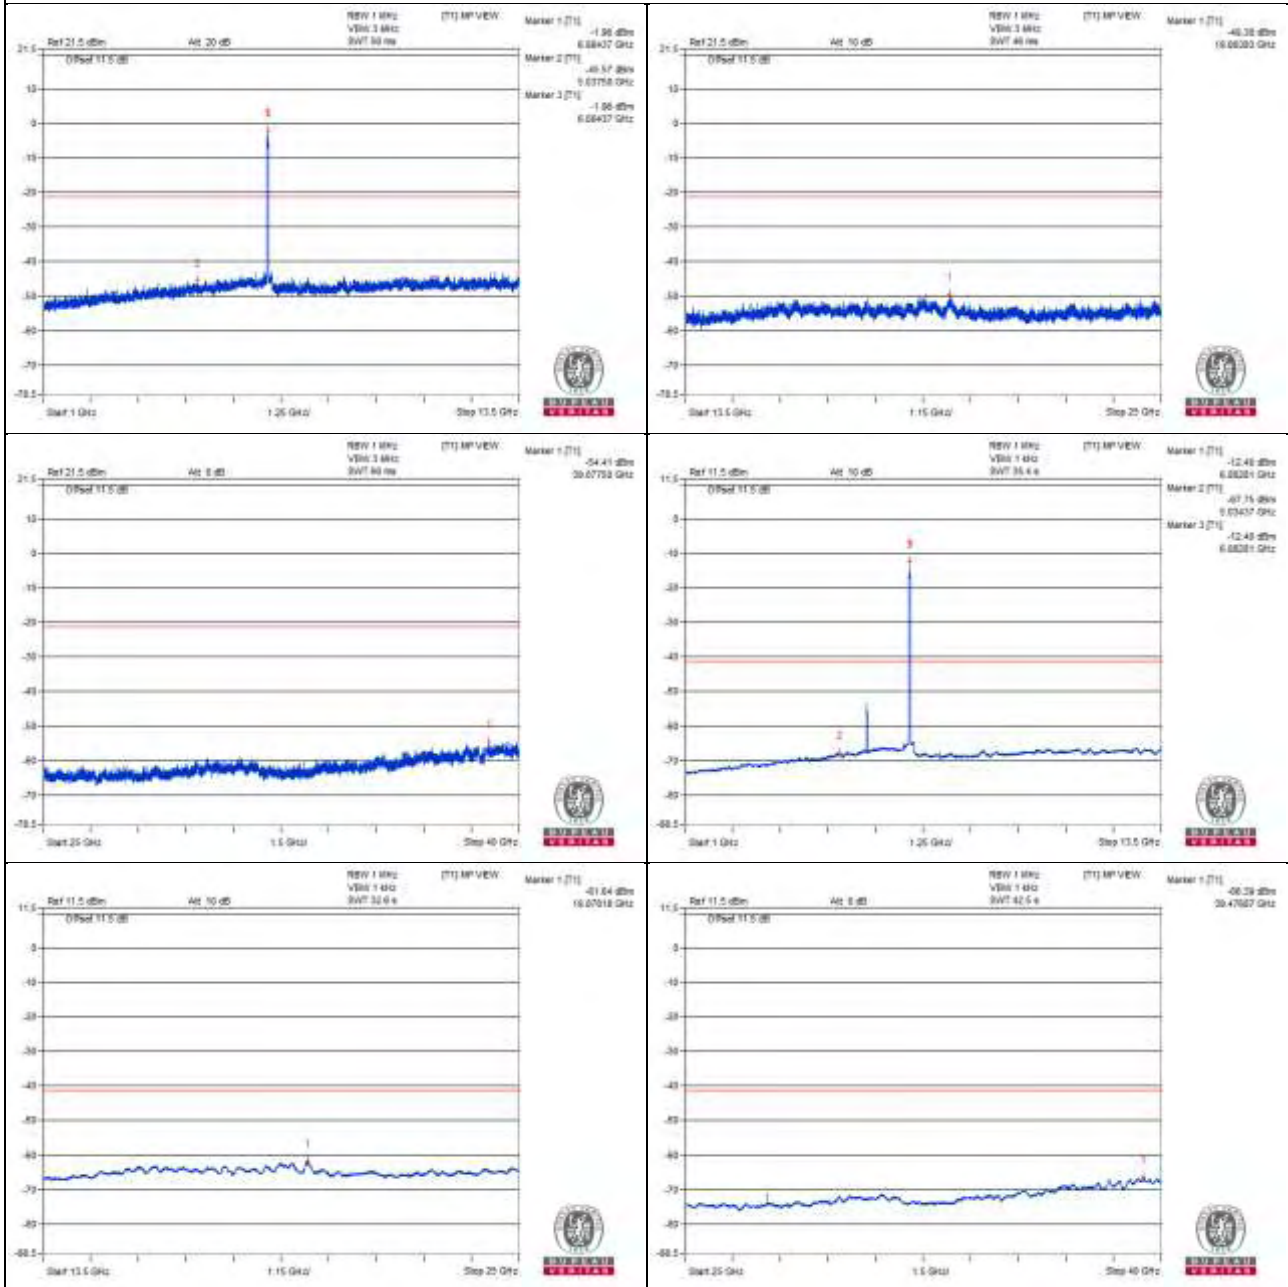

802.11ax (HE40) - Channel 211

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	14000.25 PK	50.73	88.2	-37.47	-55.88	-55.55	8.17	-44.53
2	14008.87 AV	39.87	68.2	-28.33	-66.81	-66.34	8.17	-55.39
3	21023.87 PK	51.65	74	-22.35	-54.89	-54.69	8.17	-43.61
4	21012.37 AV	41.05	54	-12.95	-65.52	-65.26	8.17	-54.21

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

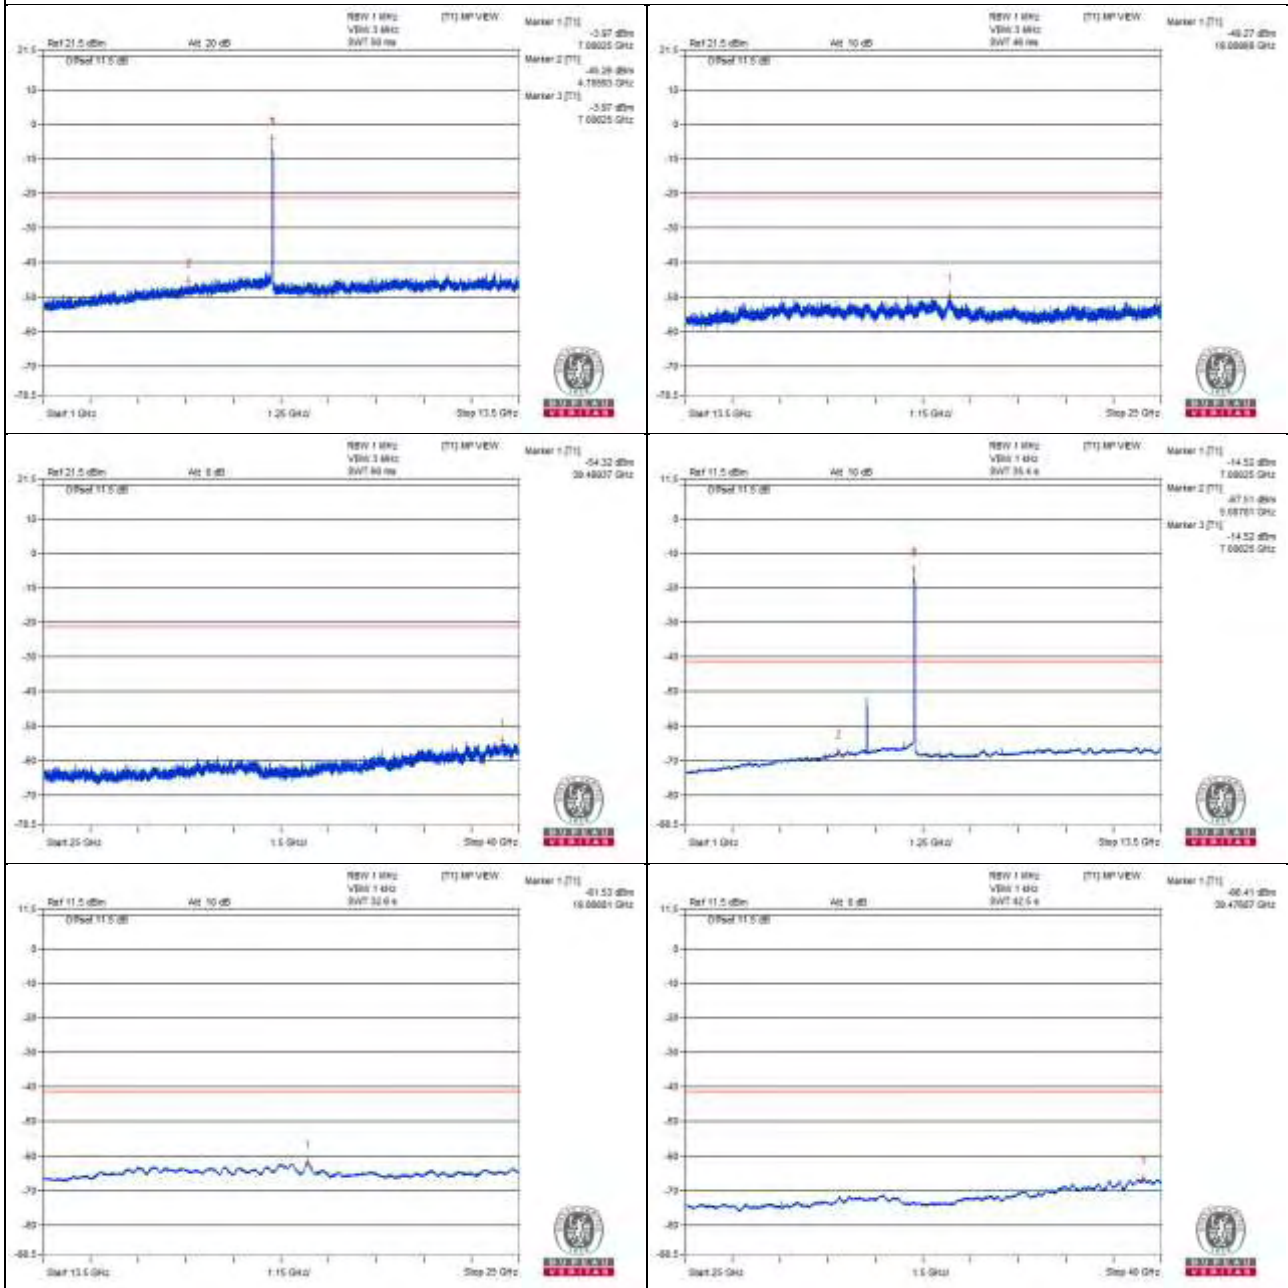

Chain 1

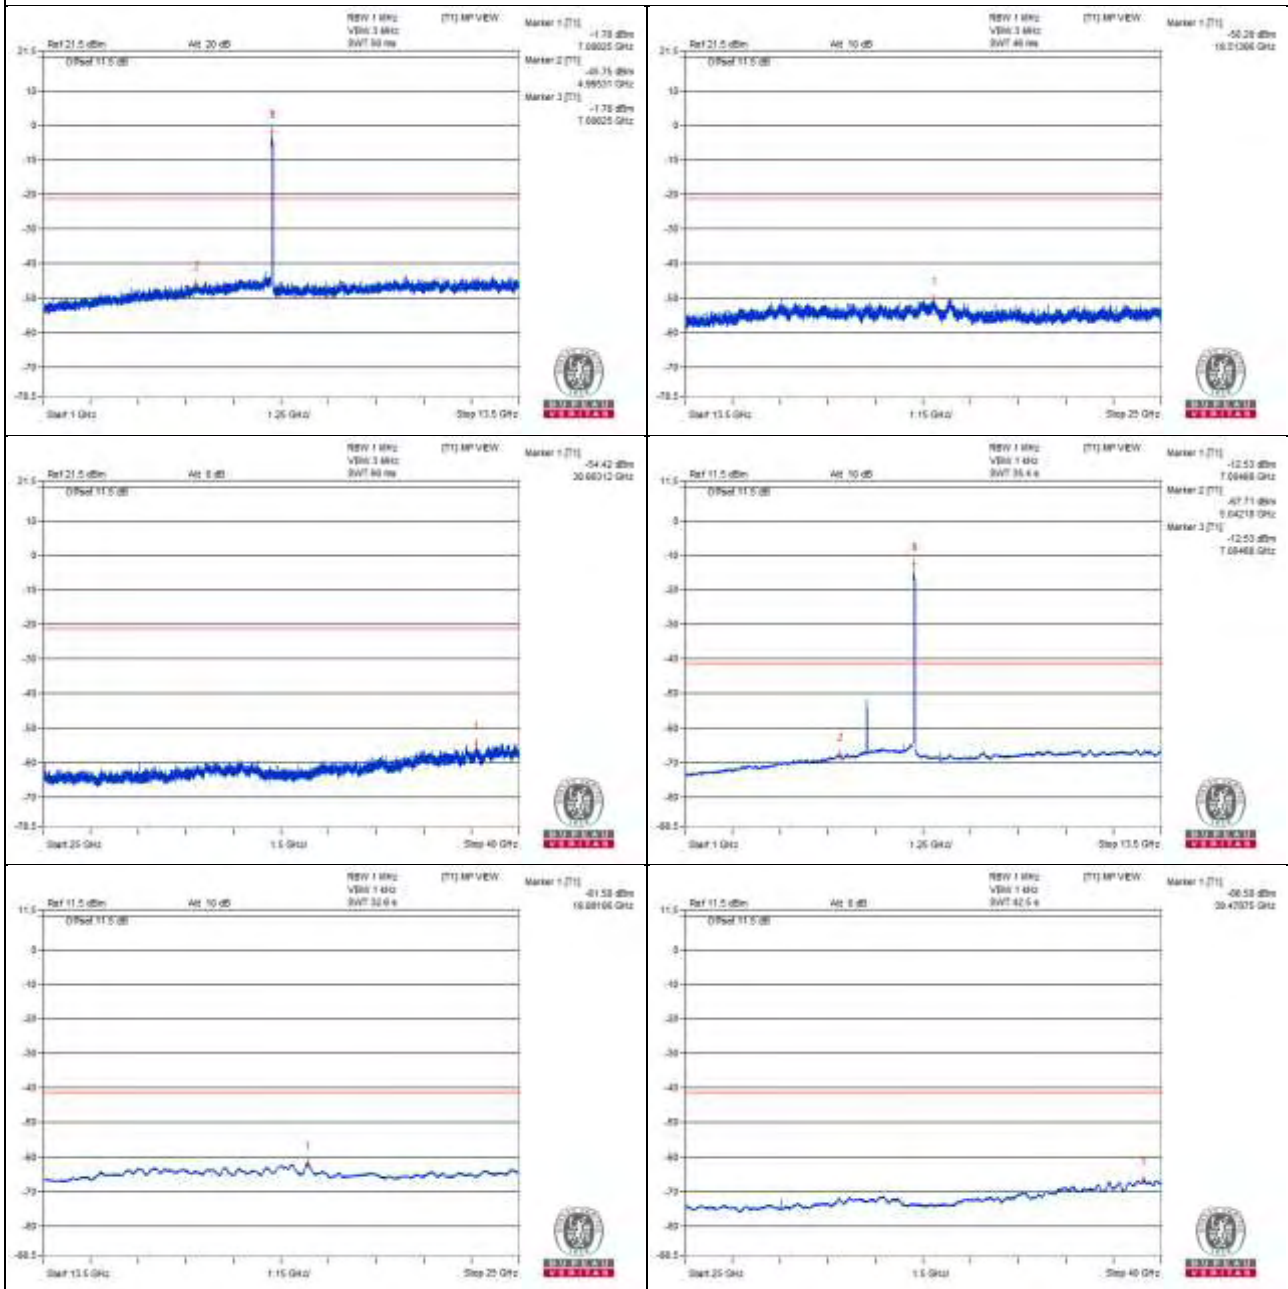

802.11ax (HE40) - Channel 227

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	14161.25 PK	51.82	88.2	-36.38	-53.44	-56.25	8.17	-43.44
2	14179.93 AV	40.37	68.2	-27.83	-66	-66.15	8.17	-54.89
3	21255.31 PK	52.05	74	-21.95	-53.47	-55.56	8.17	-43.21
4	21262.5 AV	41.27	54	-12.73	-64.95	-65.4	8.17	-53.99

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

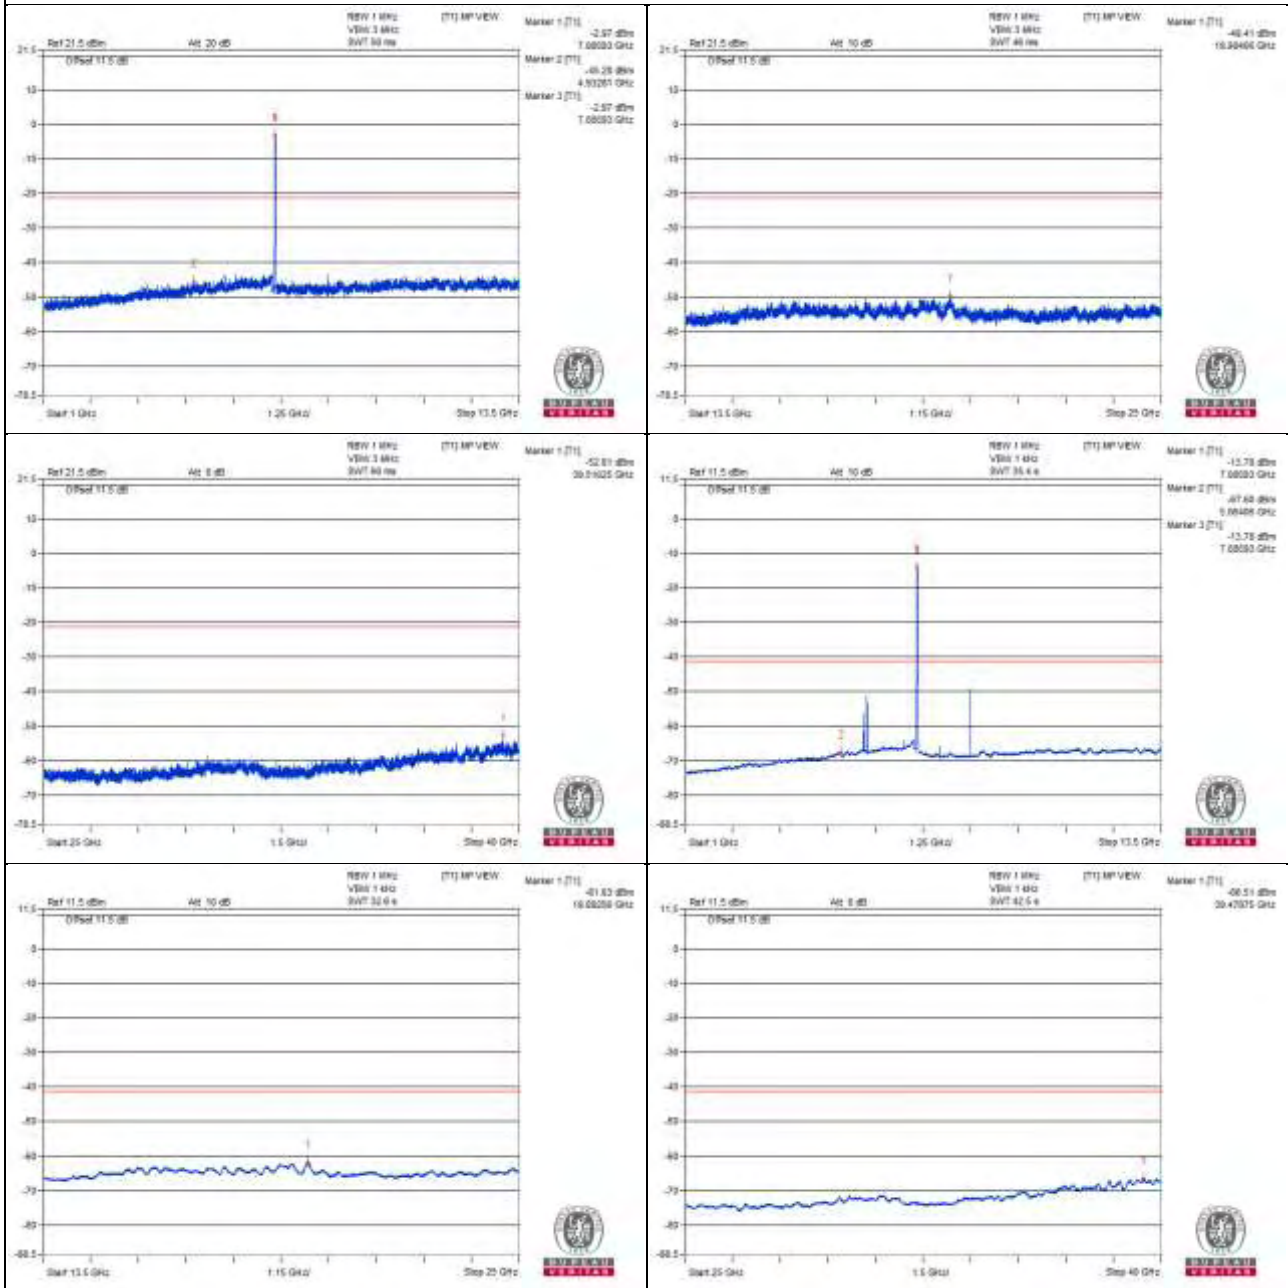

Chain 1

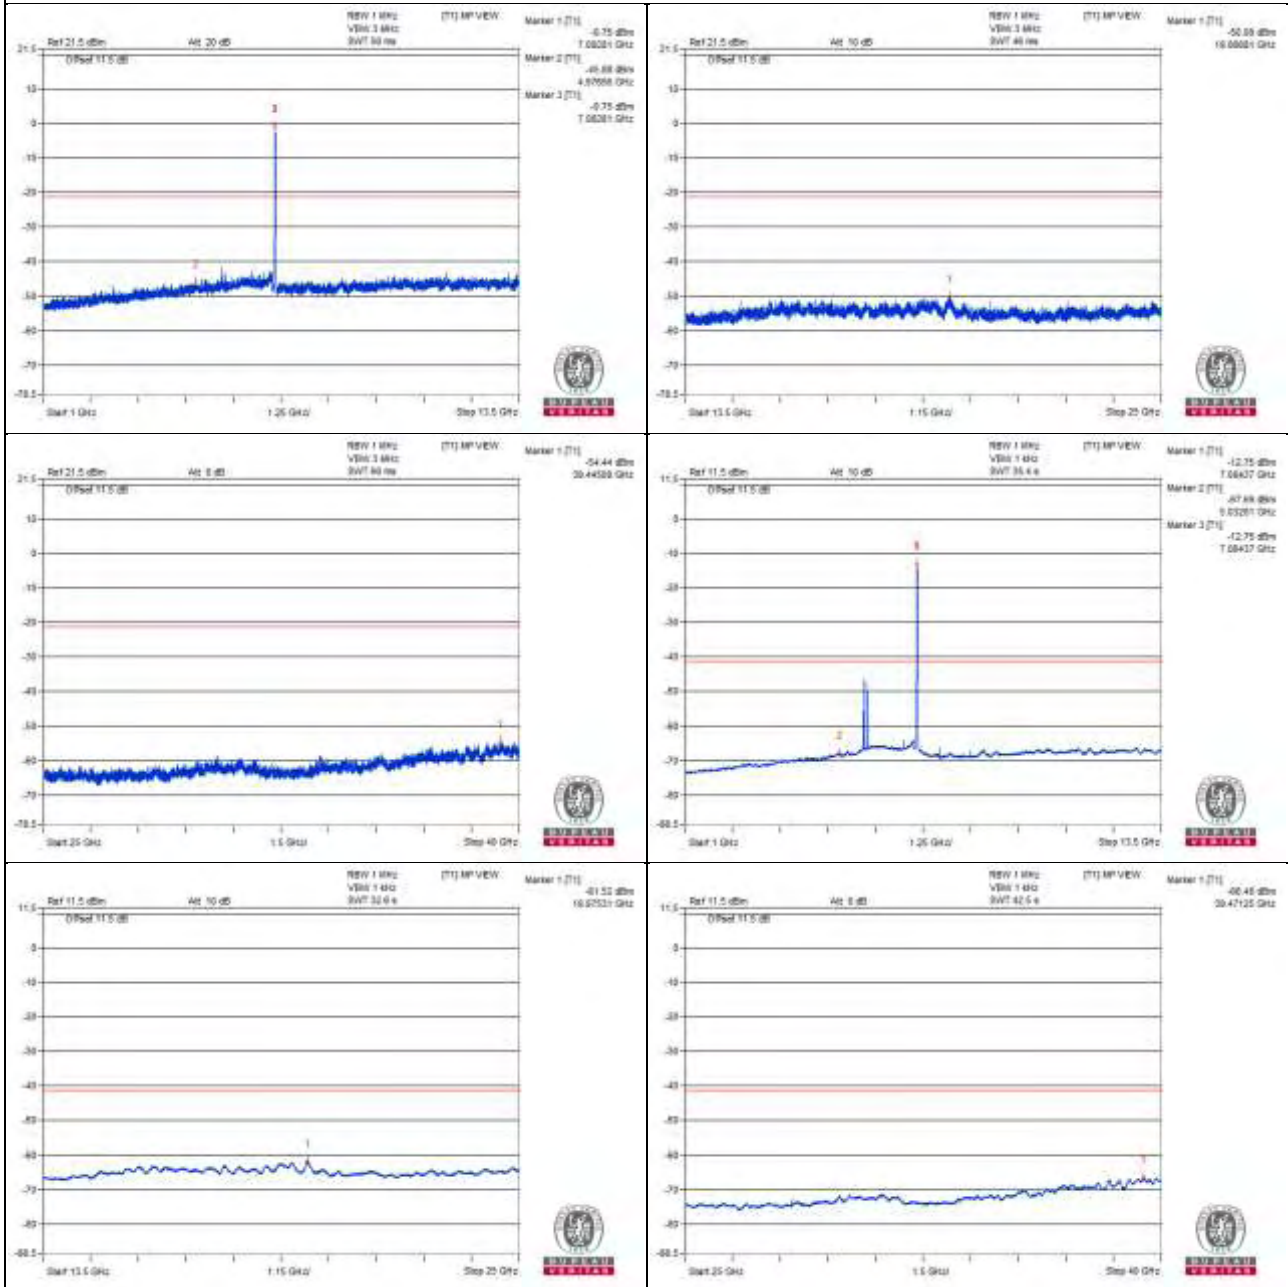

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	7181.72 PK	61	88.2	-27.2	-45.49	-45.32	8.13	-34.26
2	7202.02 AV	47.37	68.2	-20.83	-59.05	-59.01	8.13	-47.89

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

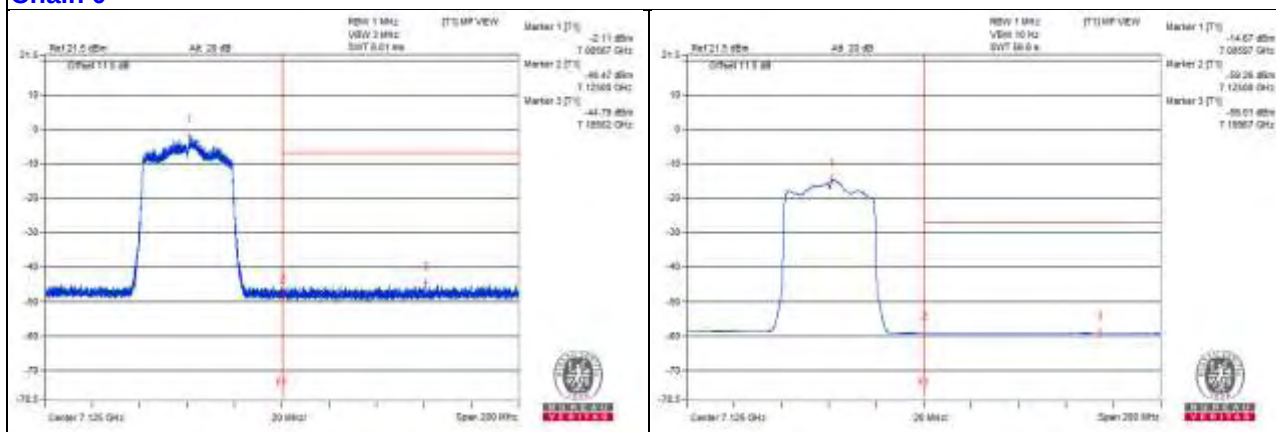

Chain 1

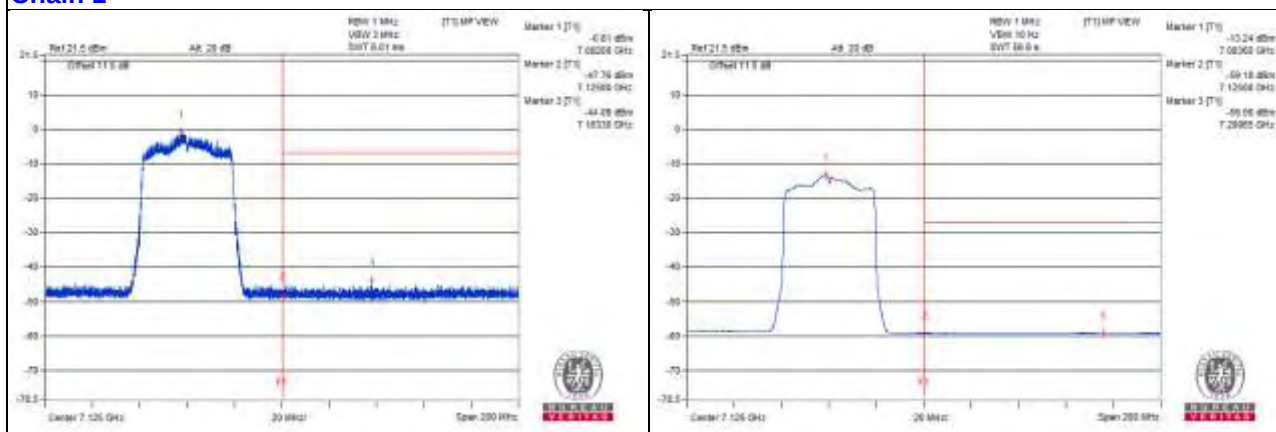

802.11ax (HE80) - Channel 7

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	11965.62 PK	60.82	74	-13.18	-44.64	-46.88	8.17	-34.44
2	11979.68 AV	39.48	54	-14.52	-66.86	-67.06	8.17	-55.78
3	17947.62 PK	54.02	74	-19.98	-54.1	-51.21	8.17	-41.24
4	17946.18 AV	42.13	54	-11.87	-64.31	-64.32	8.17	-53.13

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

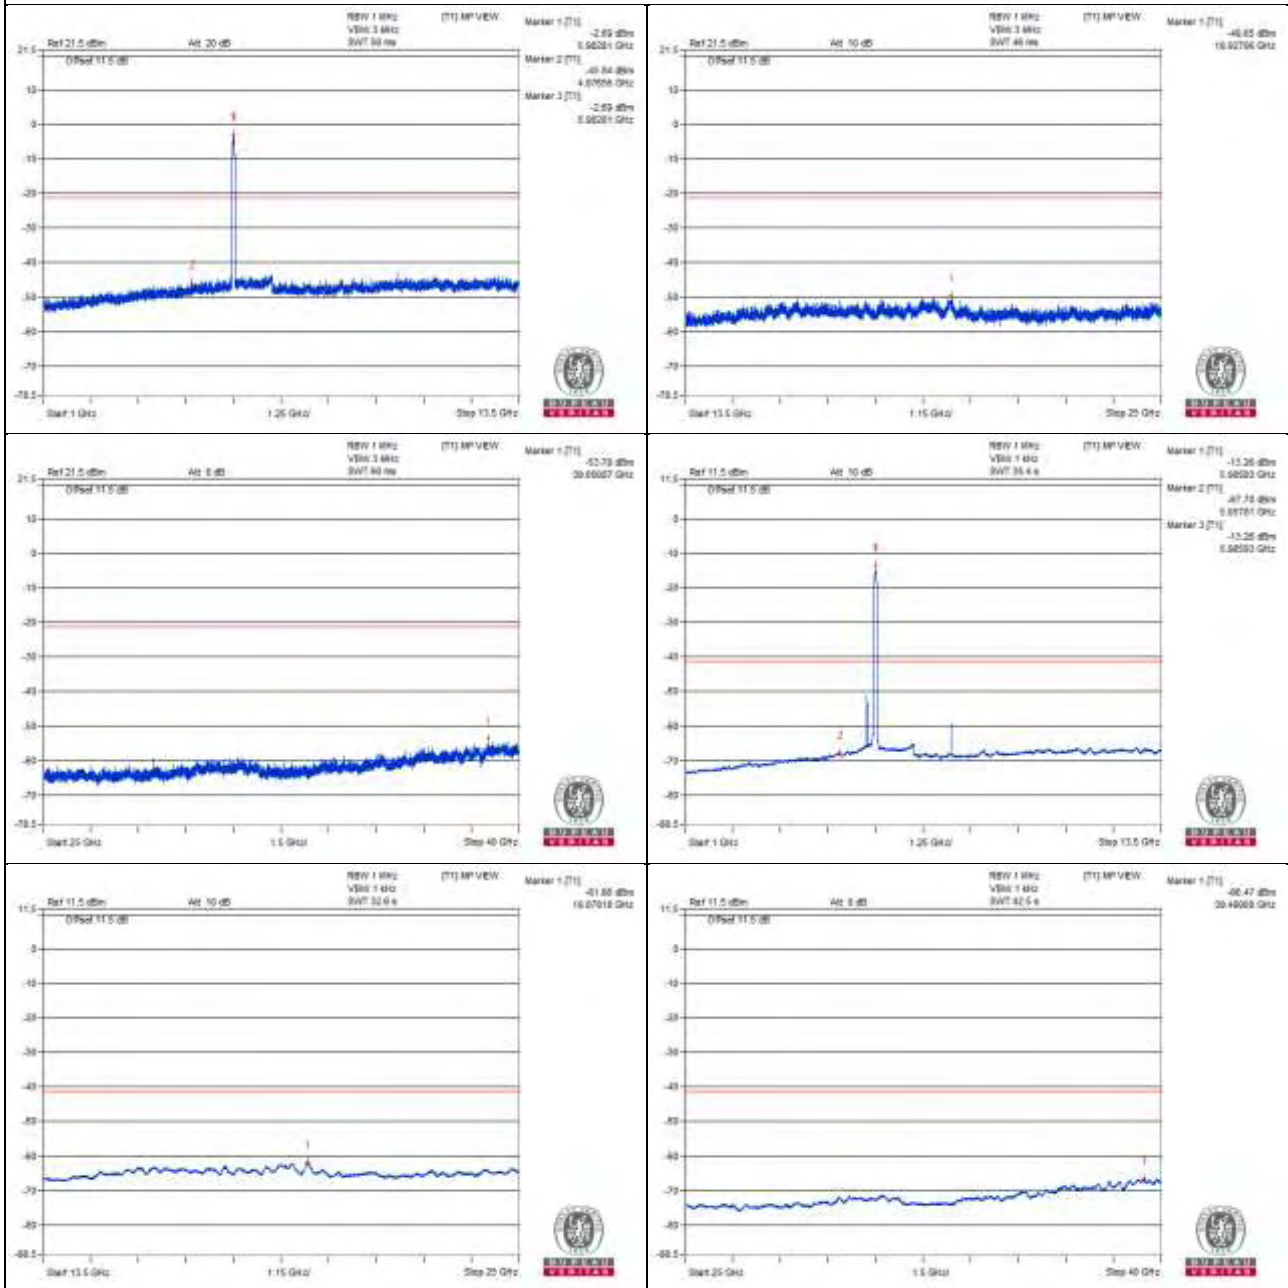

Chain 1

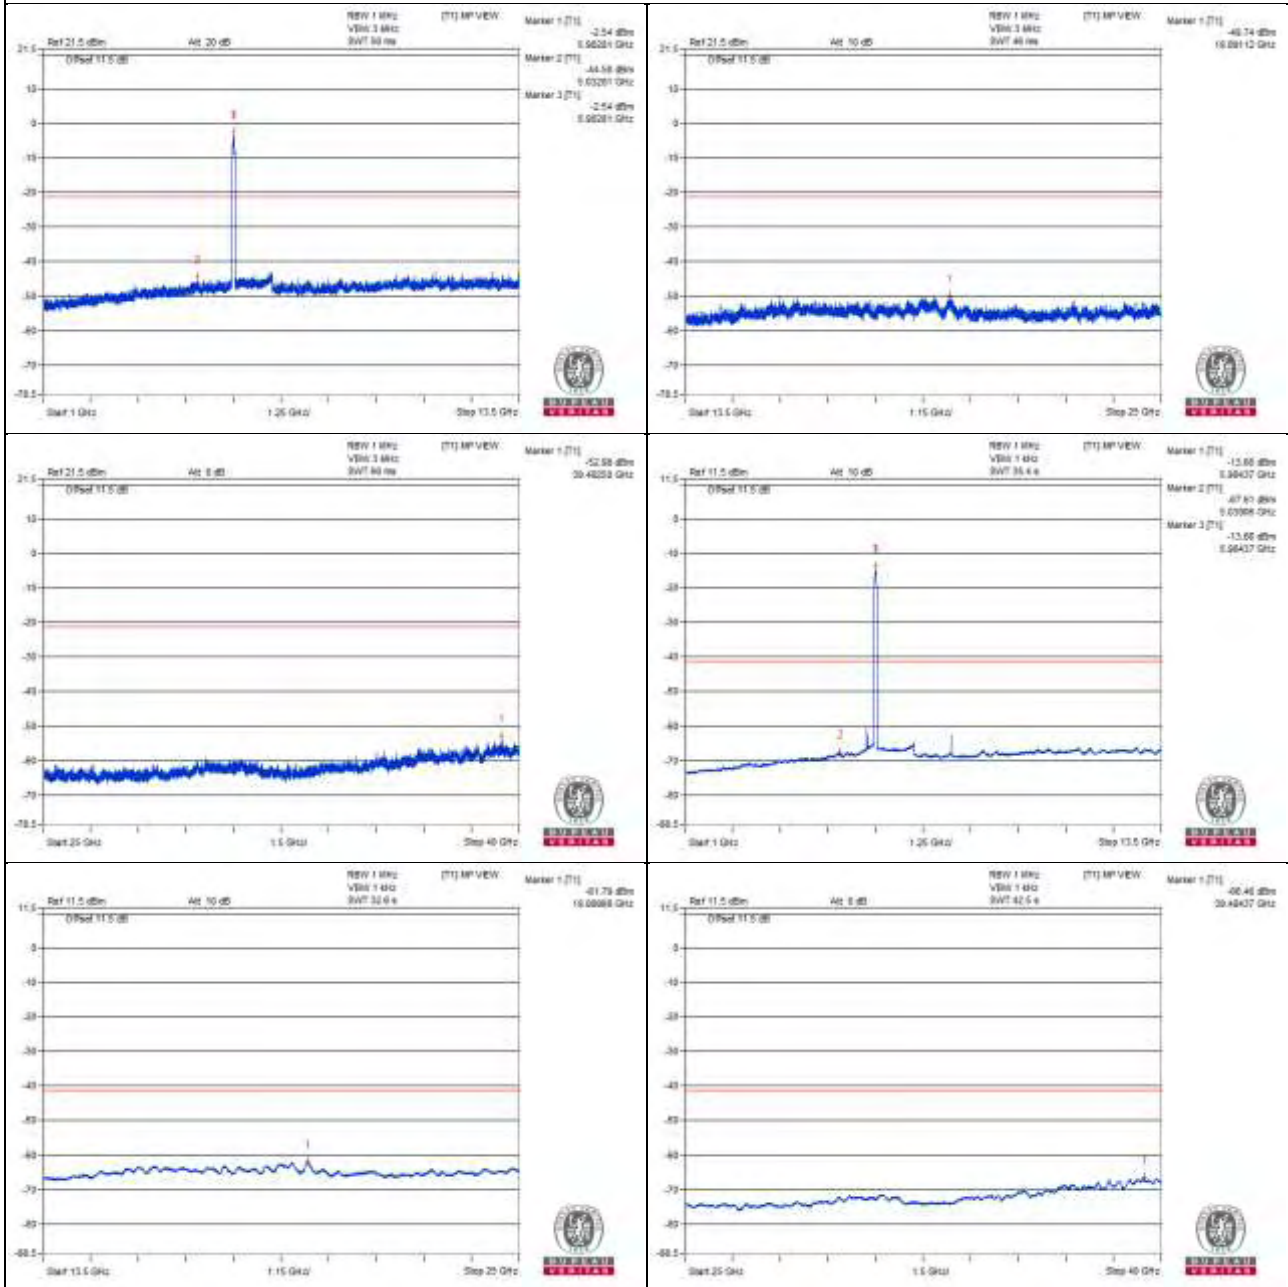

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5923.65 PK	62.31	88.2	-25.89	-44.8	-43.52	8.15	-32.95
2	5923.8 AV	48.62	68.2	-19.58	-57.48	-58.14	8.15	-46.64

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

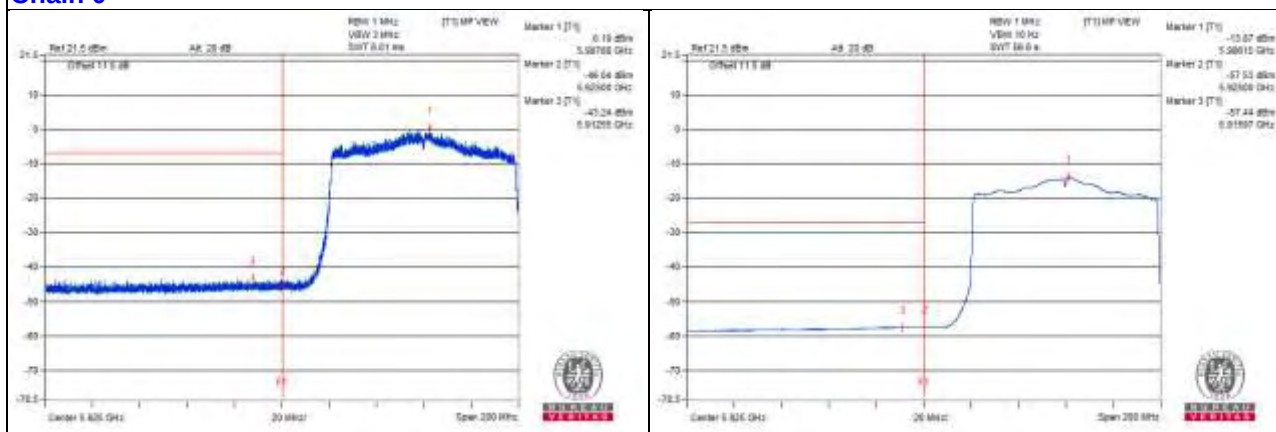

Chain 1

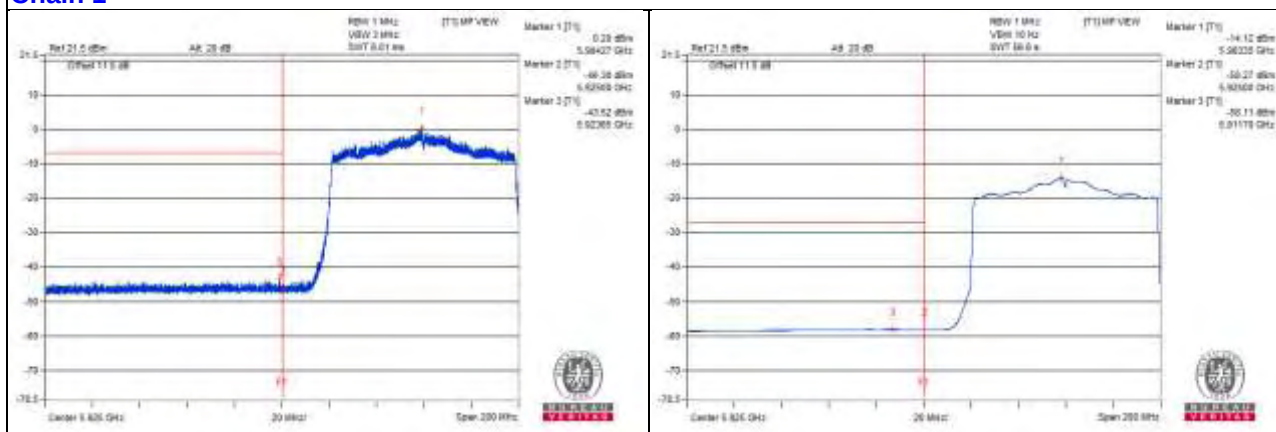

802.11ax (HE80) - Channel 39

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	12289.06 PK	61.26	74	-12.74	-44.69	-45.73	8.17	-34
2	12290.62 AV	39.15	54	-14.85	-67.21	-67.37	8.17	-56.11
3	18427.75 PK	52.84	74	-21.16	-52.99	-54.3	8.17	-42.42
4	18434.93 AV	41.77	54	-12.23	-64.39	-64.97	8.17	-53.49

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

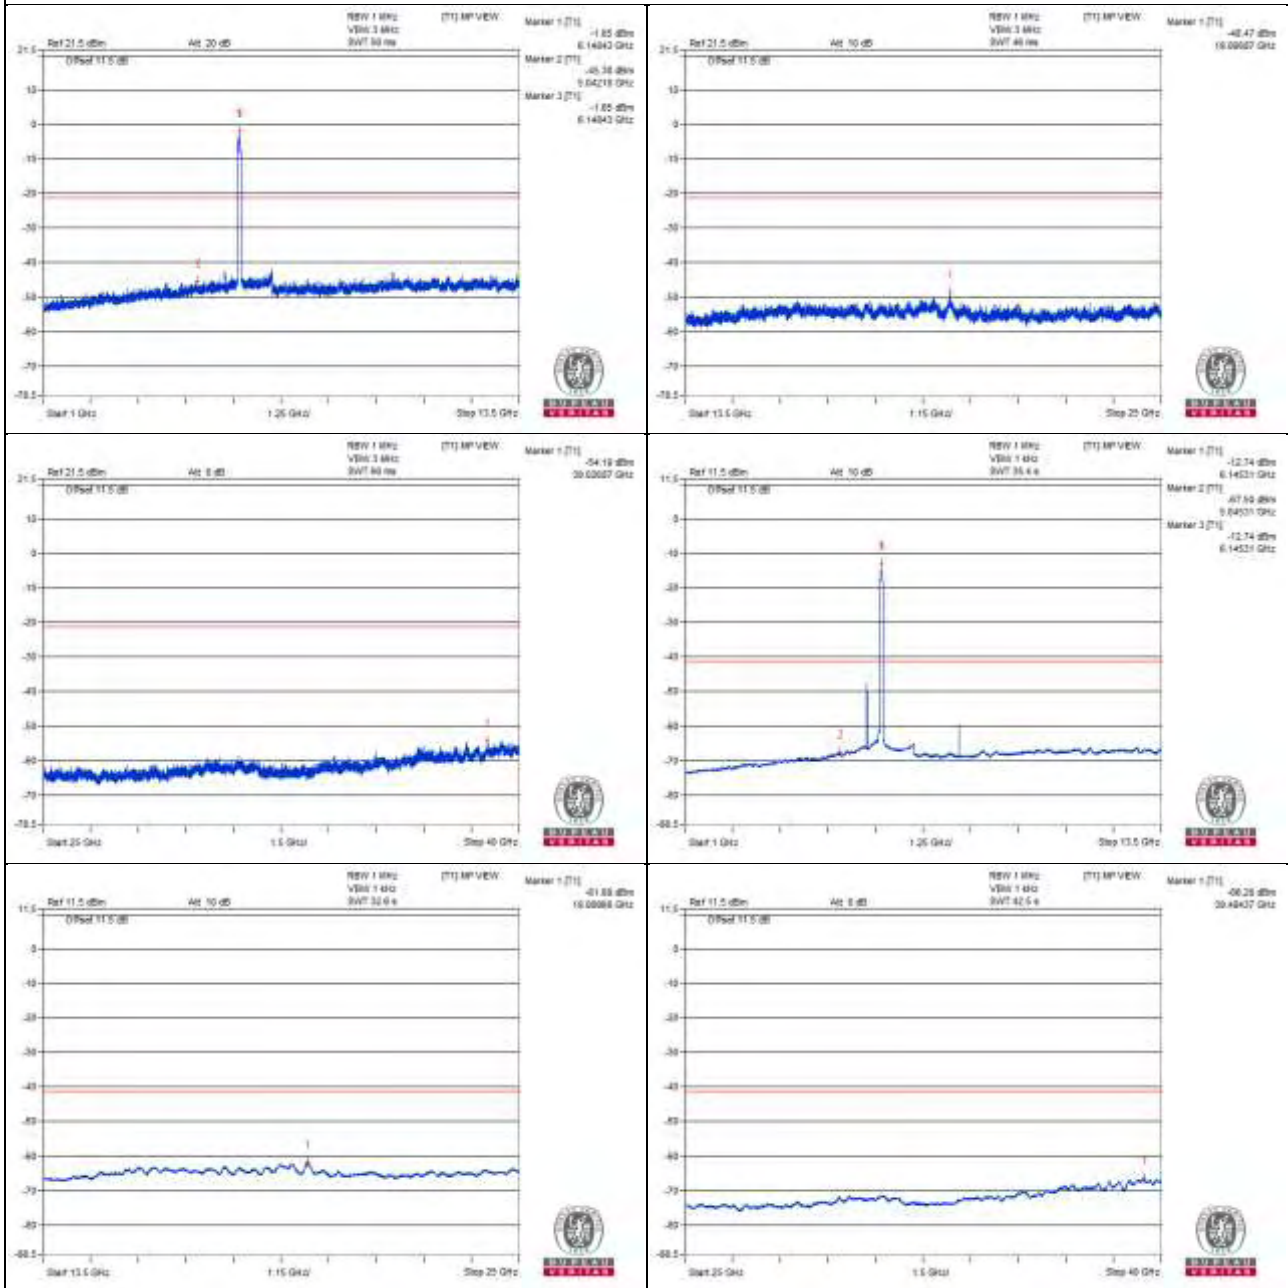

Chain 1

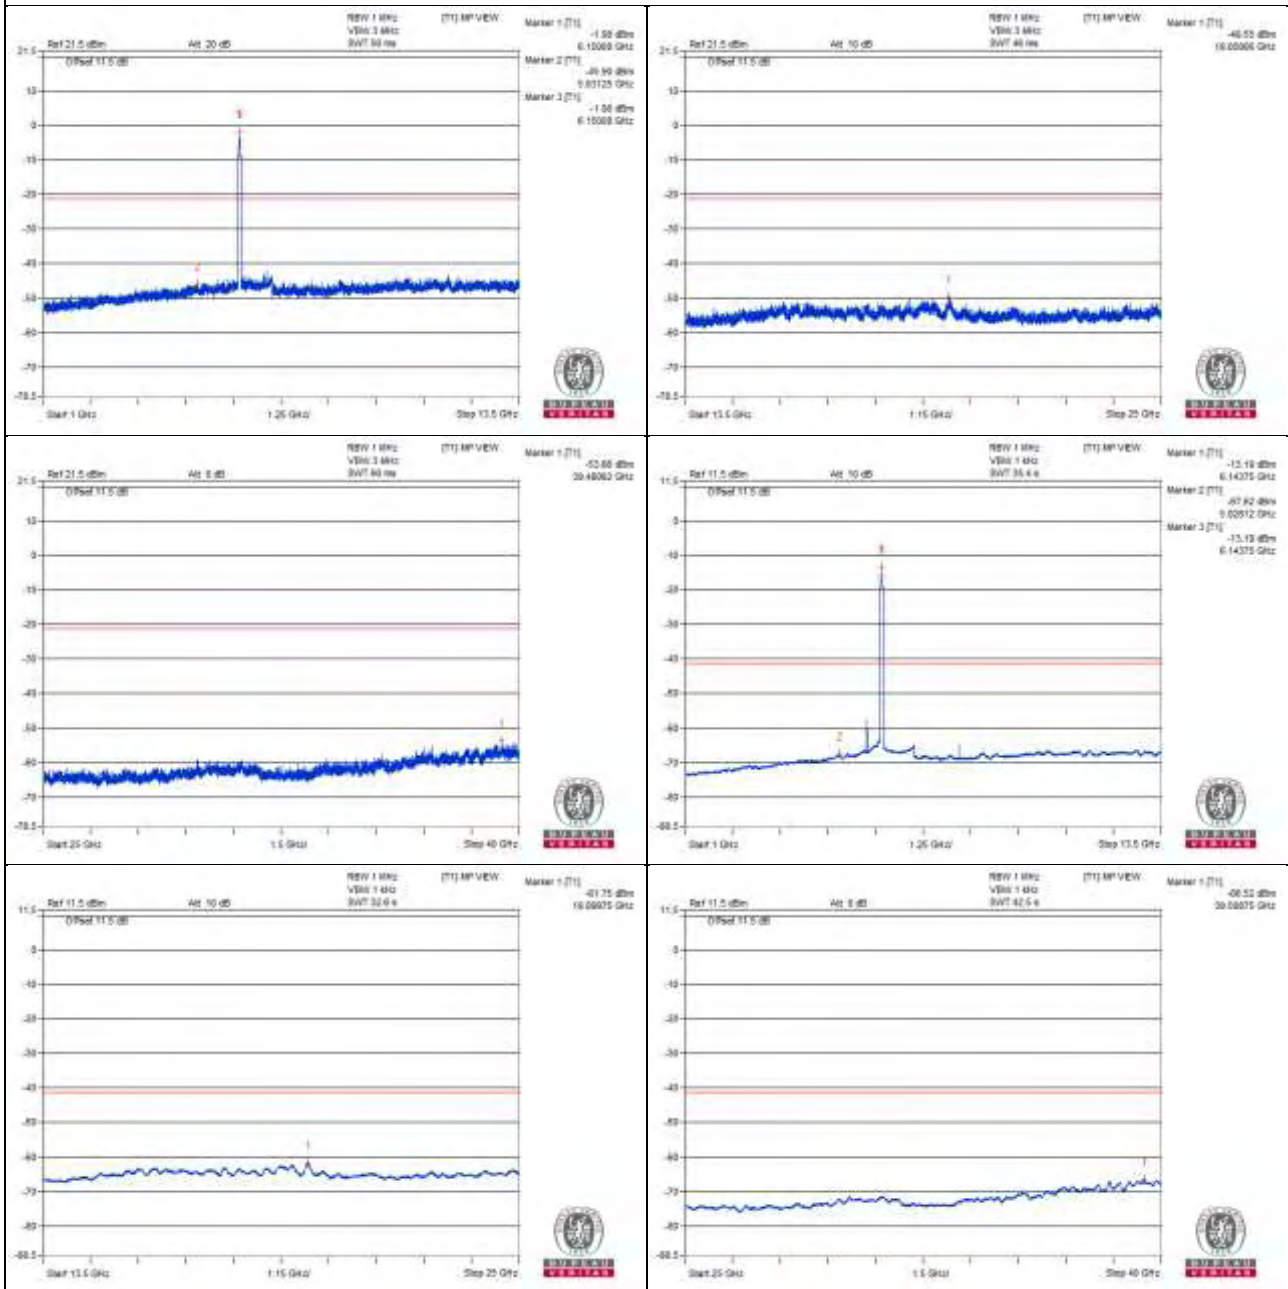

802.11ax (HE80) - Channel 87

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	12765.62 PK	61.04	88.2	-27.16	-47.82	-43.85	8.17	-34.22
2	12770.31 AV	39.51	68.2	-28.69	-66.91	-66.95	8.17	-55.75
3	19152.25 PK	54.73	74	-19.27	-51.65	-51.78	8.17	-40.53
4	19162.31 AV	43.29	54	-10.71	-63.11	-63.19	8.17	-51.97

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

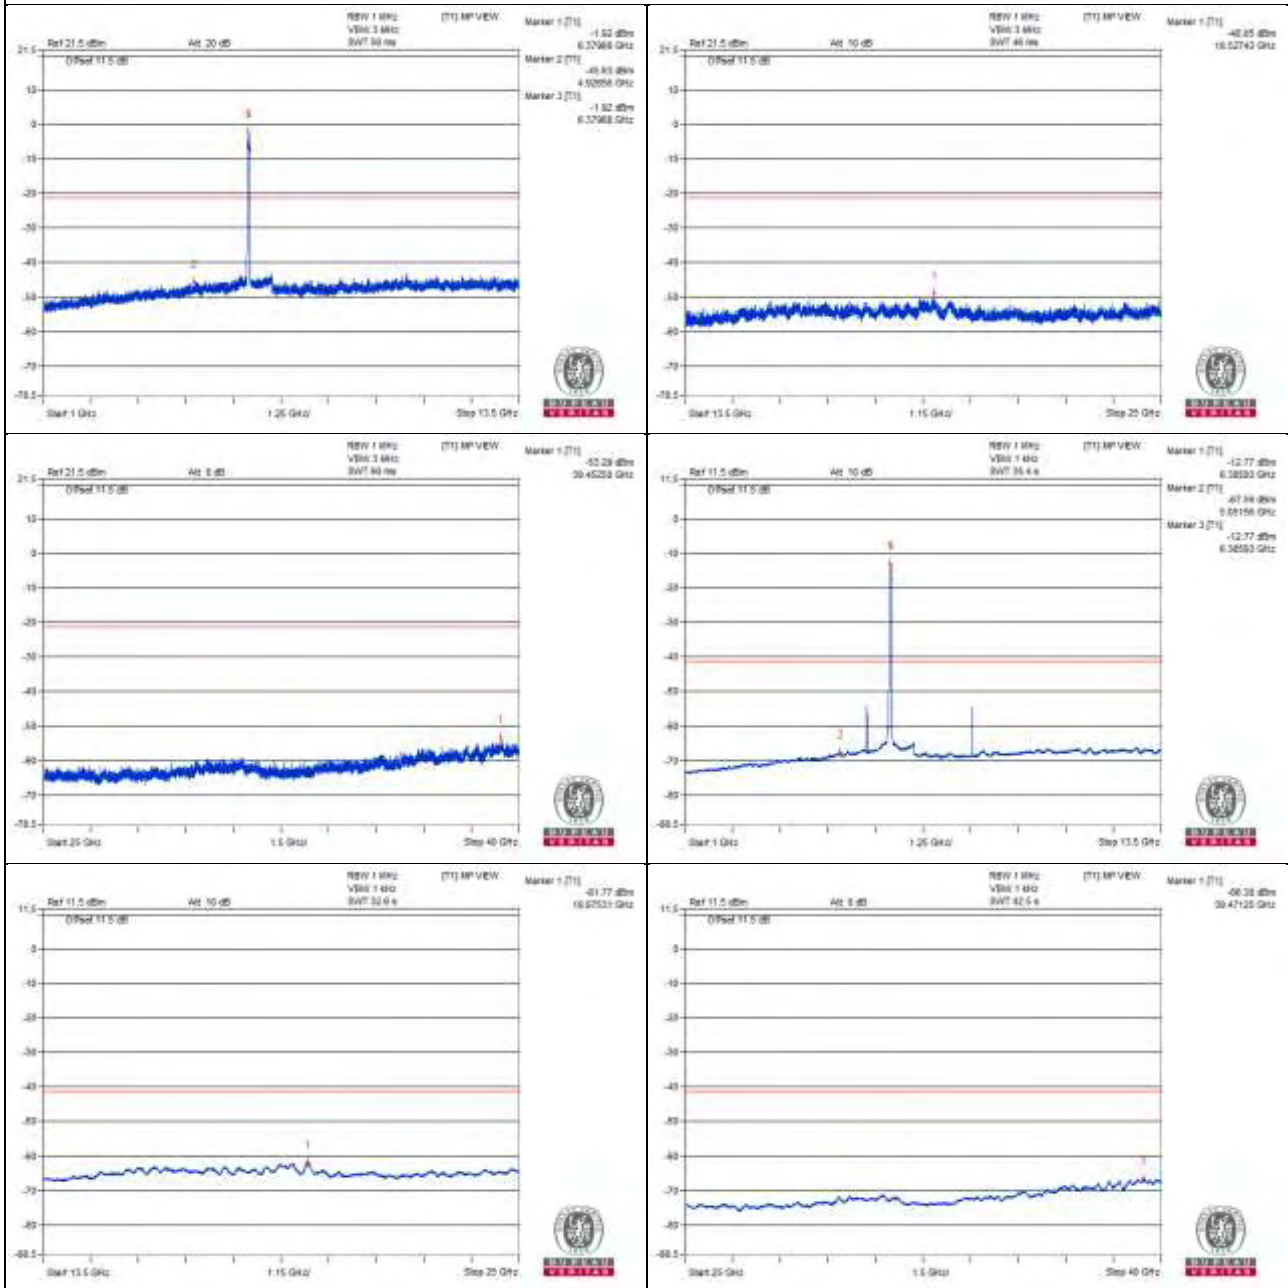

Chain 1

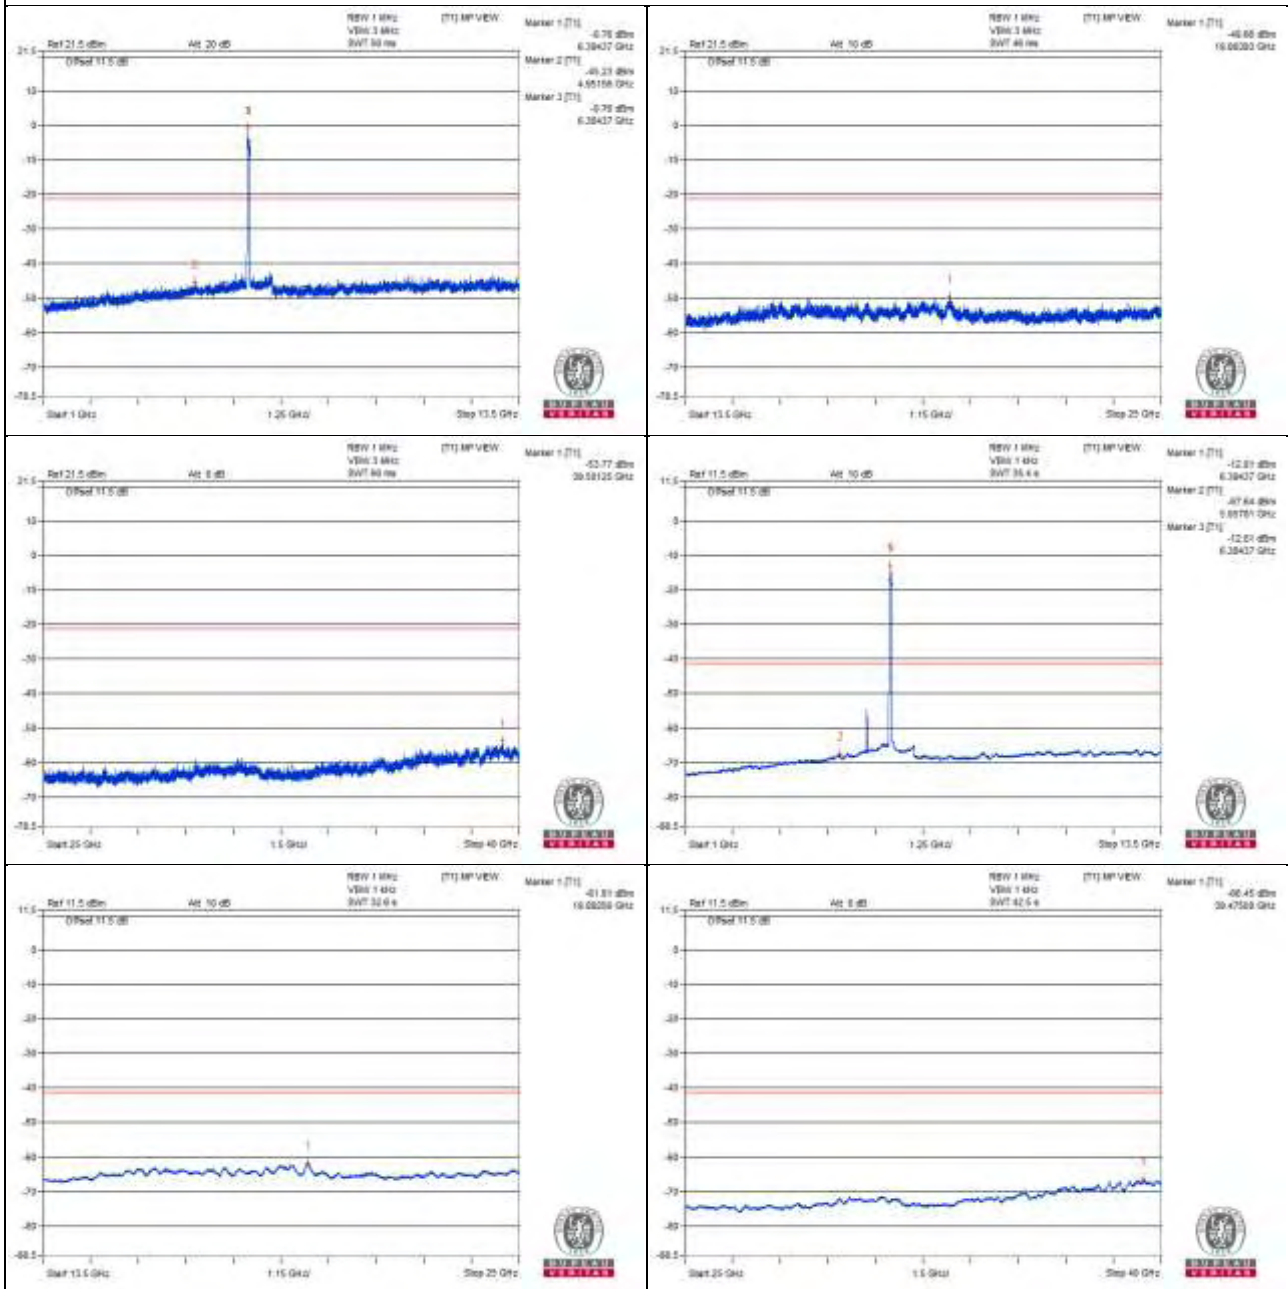

802.11ax (HE80) - Channel 103

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	12925 PK	61.09	88.2	-27.11	-46.1	-44.71	8.17	-34.17
2	12921.87 AV	39.53	68.2	-28.67	-67	-66.83	8.17	-55.73
3	19388 PK	53.56	74	-20.44	-52.34	-53.5	8.17	-41.7
4	19388 AV	43.38	54	-10.62	-63.15	-62.97	8.17	-51.88

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

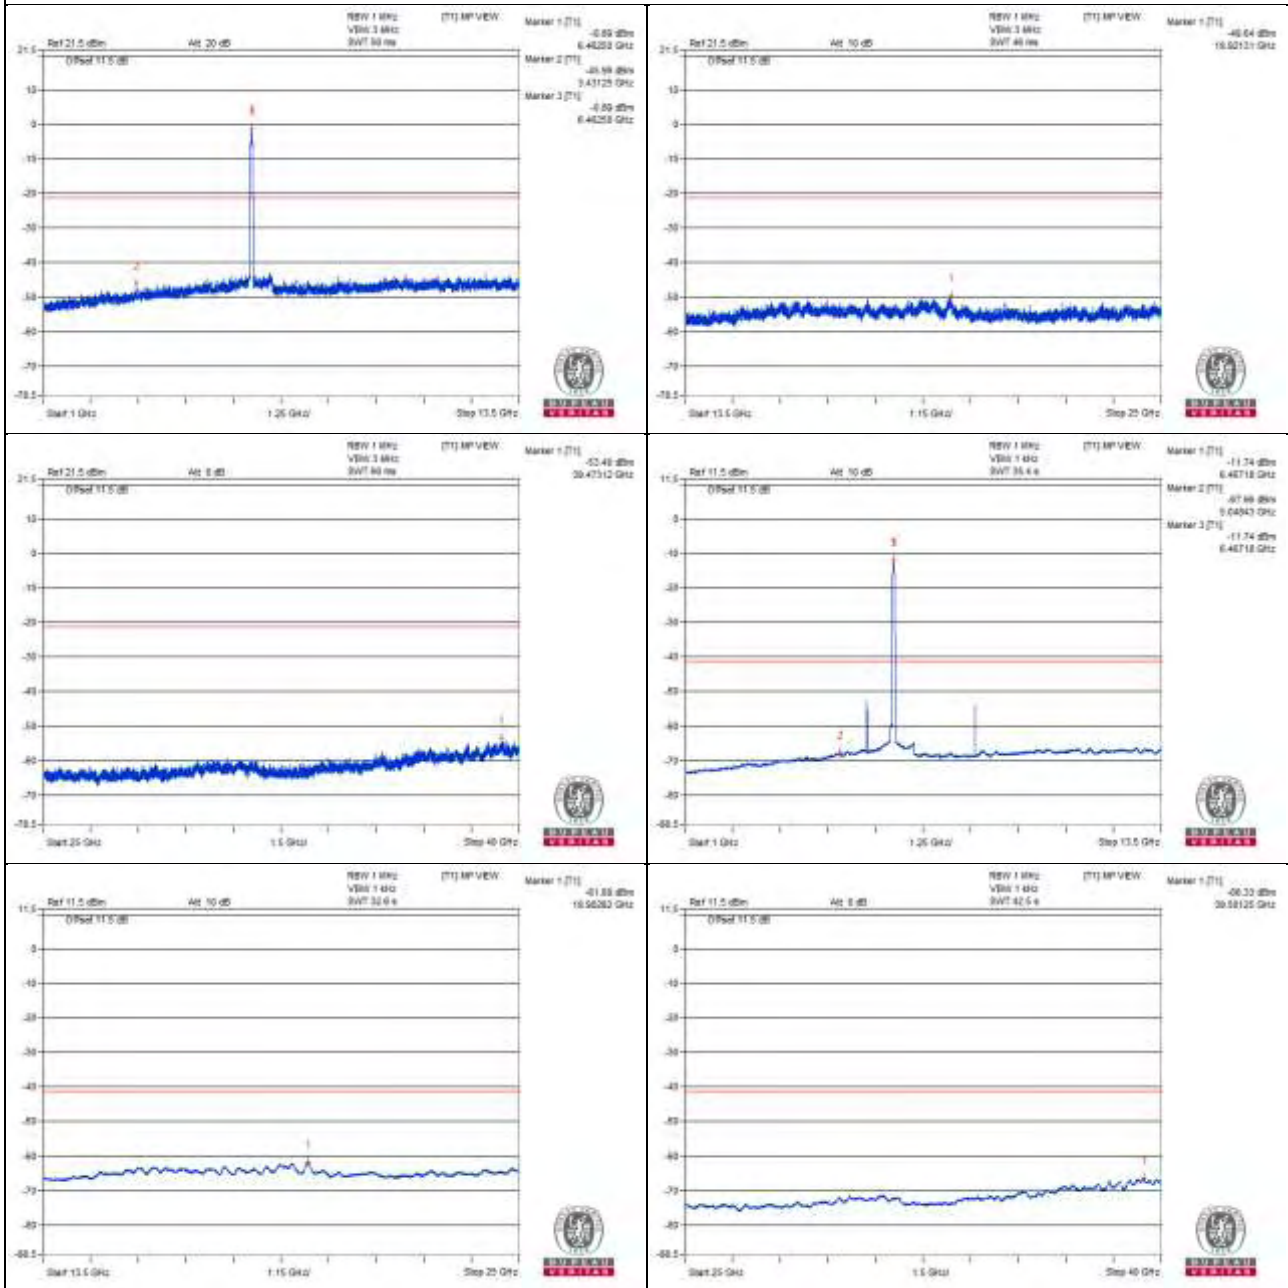

Chain 1

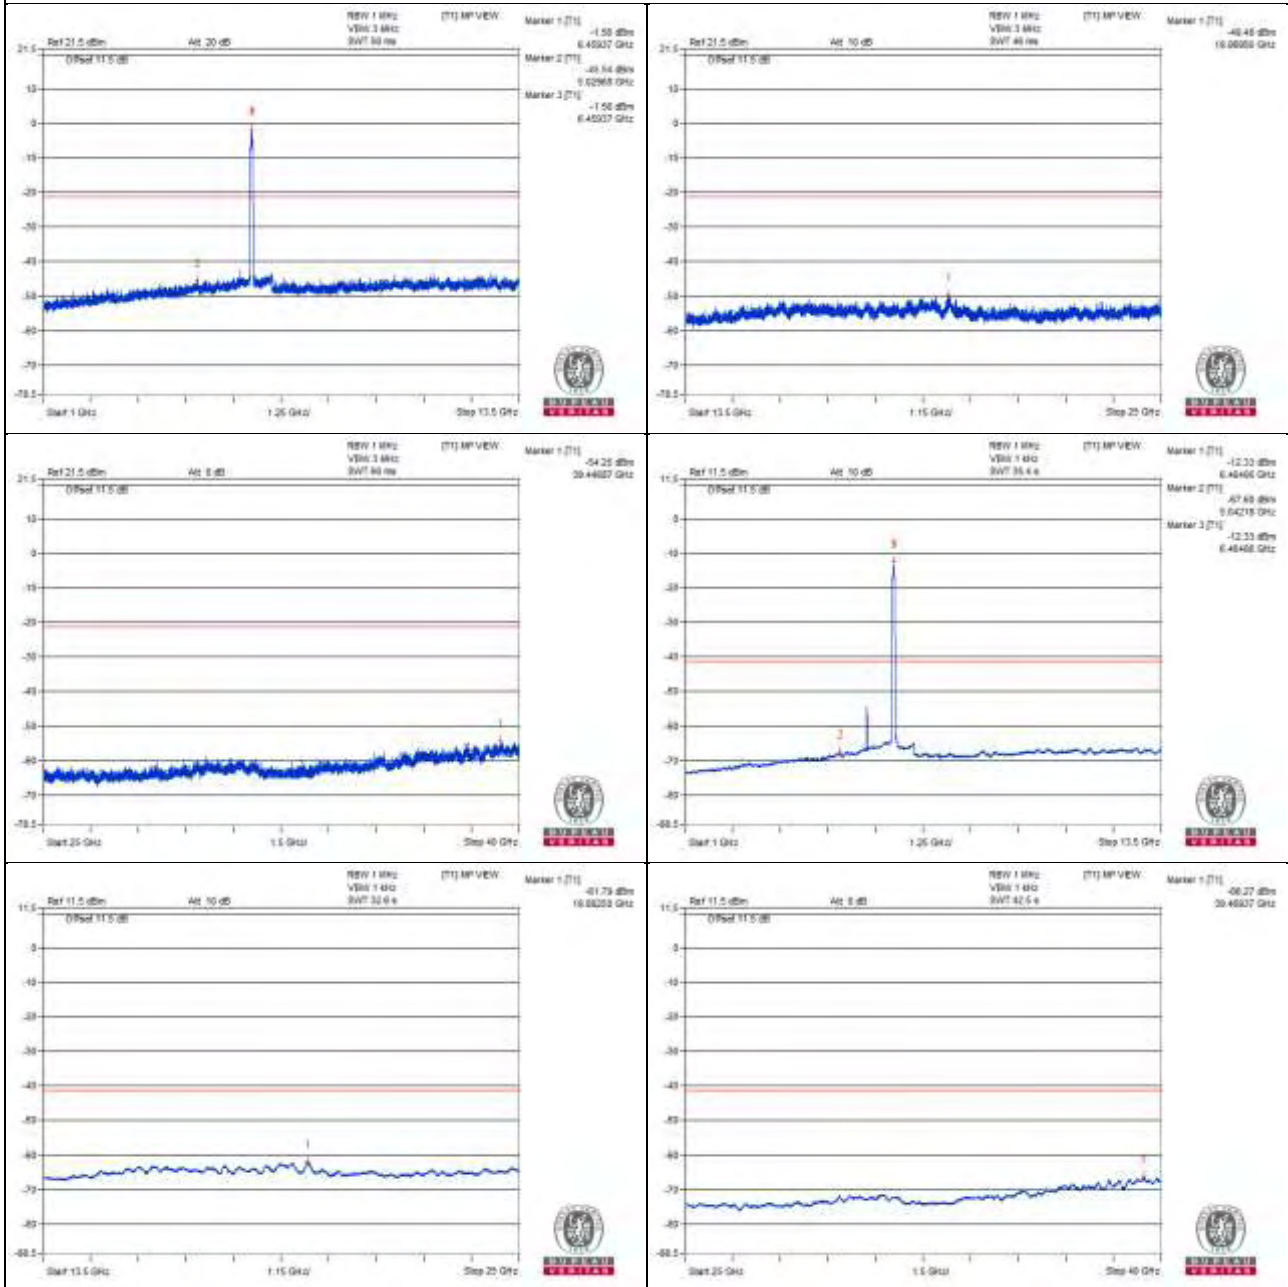

802.11ax (HE80) - Channel 119

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	13096.87 PK	60.93	88.2	-27.27	-45.74	-45.29	8.17	-34.33
2	13089.06 AV	39.79	68.2	-28.41	-66.26	-67.08	8.17	-55.47
3	19643.87 PK	52.93	74	-21.07	-55.18	-52.3	8.17	-42.33
4	19628.06 AV	42.2	54	-11.8	-64.3	-64.19	8.17	-53.06

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

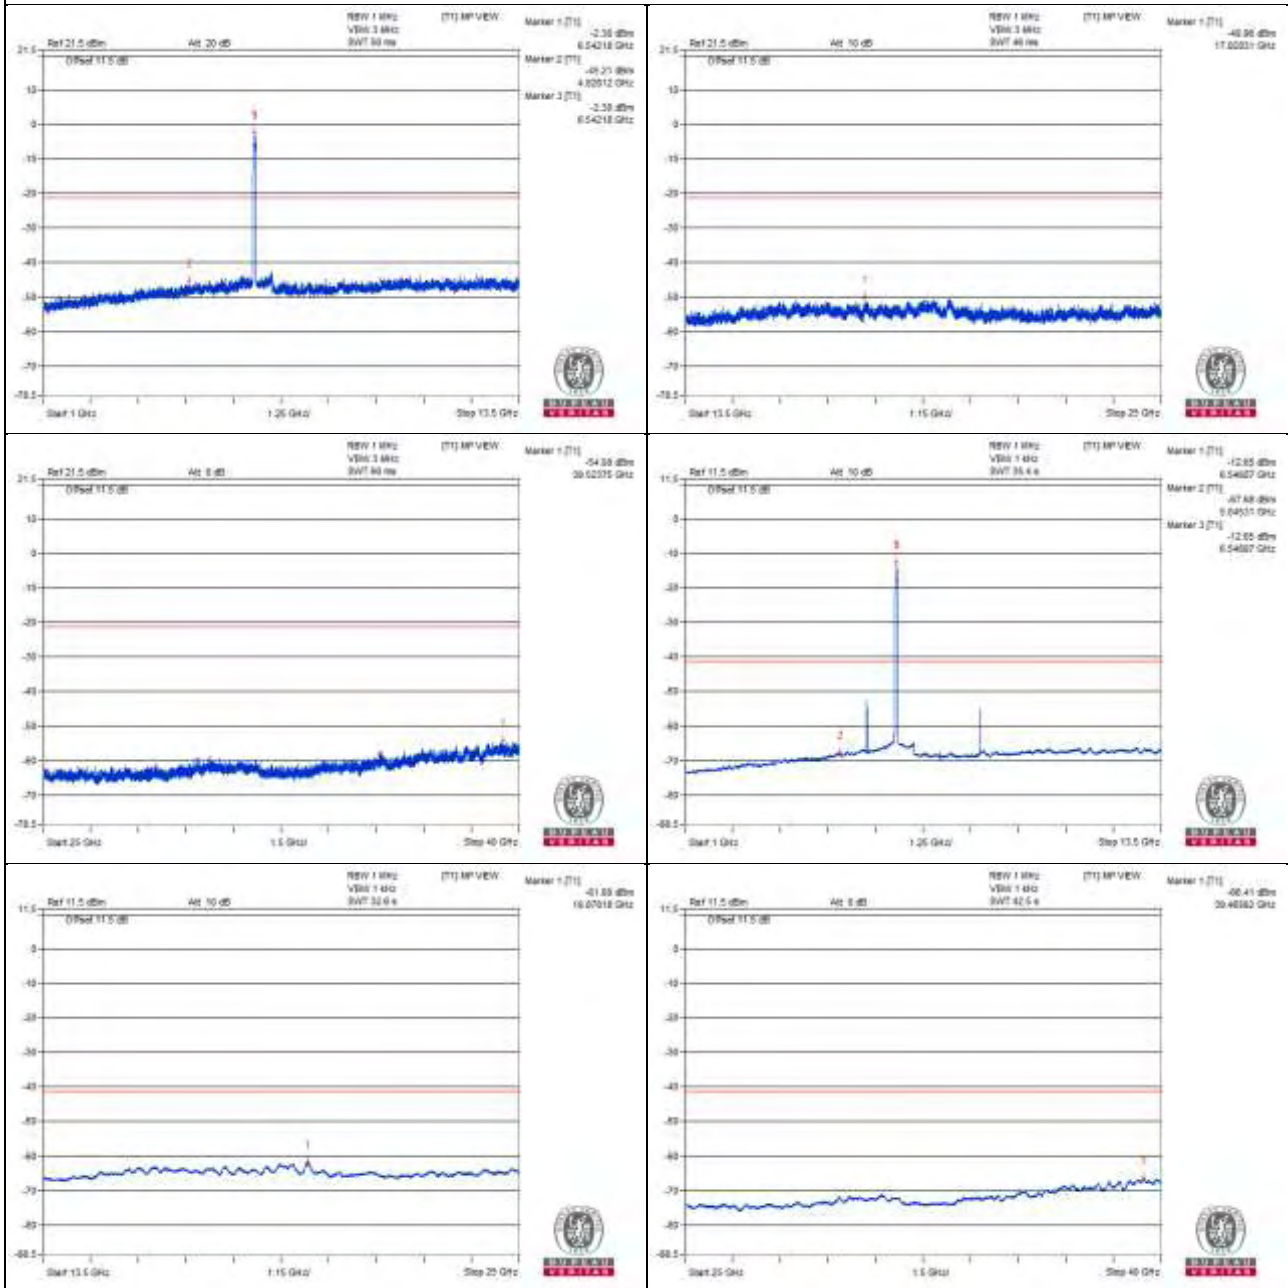

Chain 1

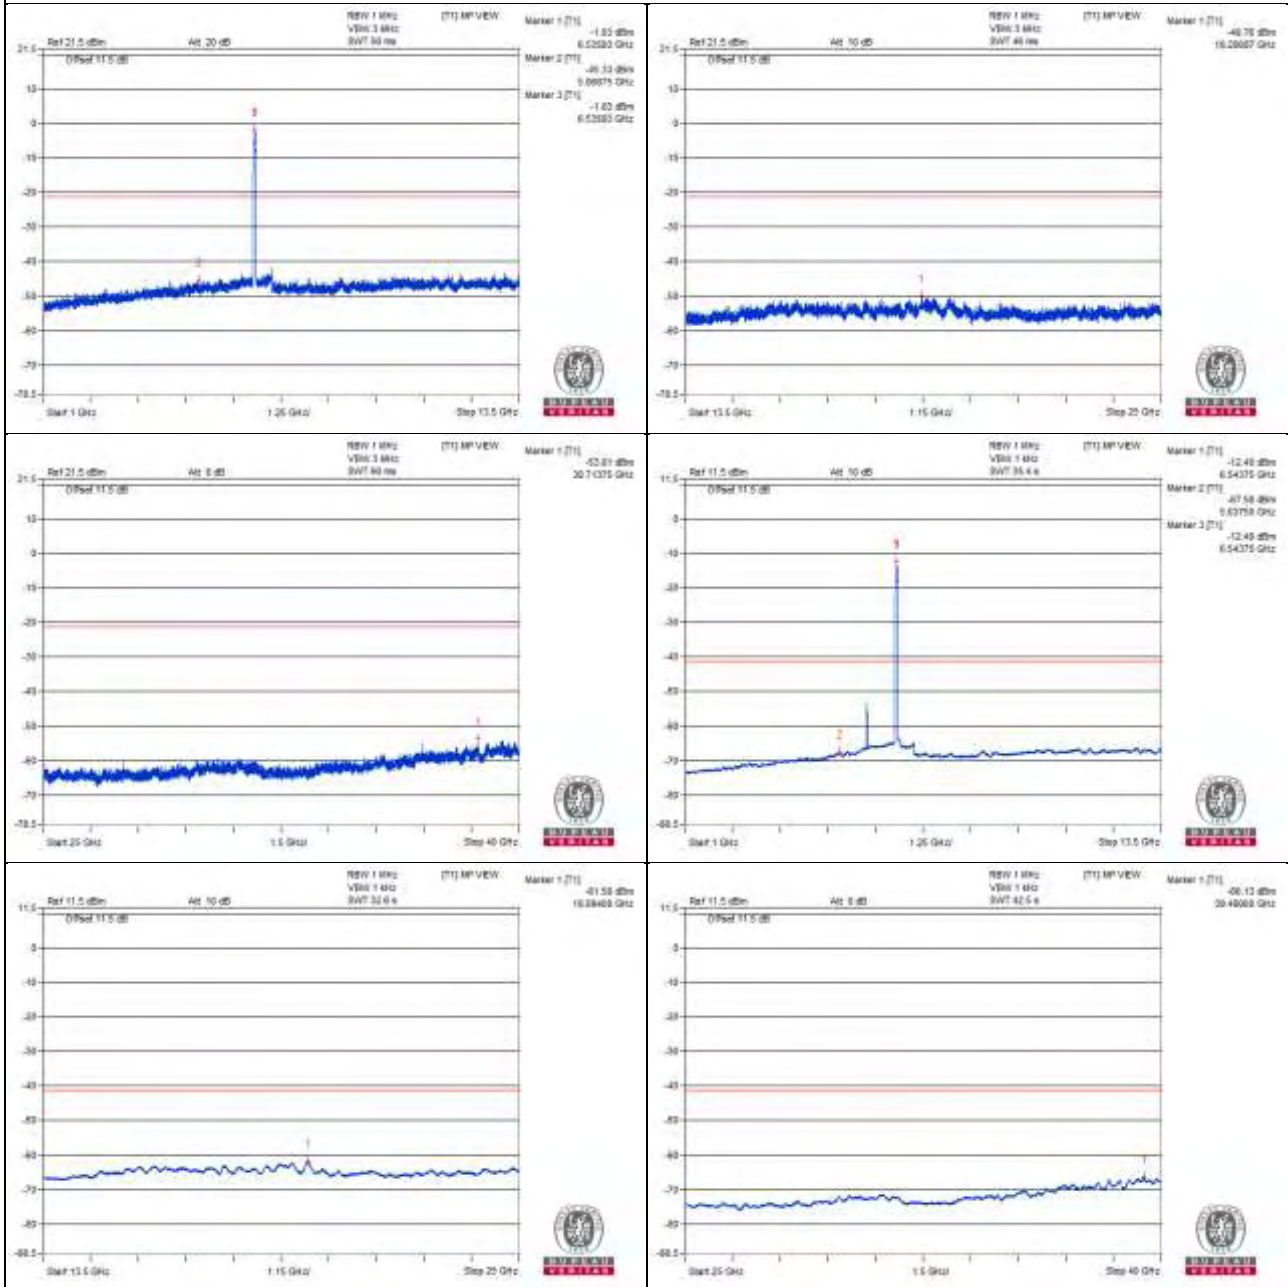

802.11ax (HE80) - Channel 151

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	13414.06 PK	60.4	88.2	-27.8	-44.75	-47.88	8.17	-34.86
2	13418.75 AV	38.82	68.2	-29.38	-67.55	-67.7	8.17	-56.44
3	20109.62 PK	52.11	74	-21.89	-54.5	-54.16	8.17	-43.15
4	20118.25 AV	41.88	54	-12.12	-64.34	-64.79	8.17	-53.38

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

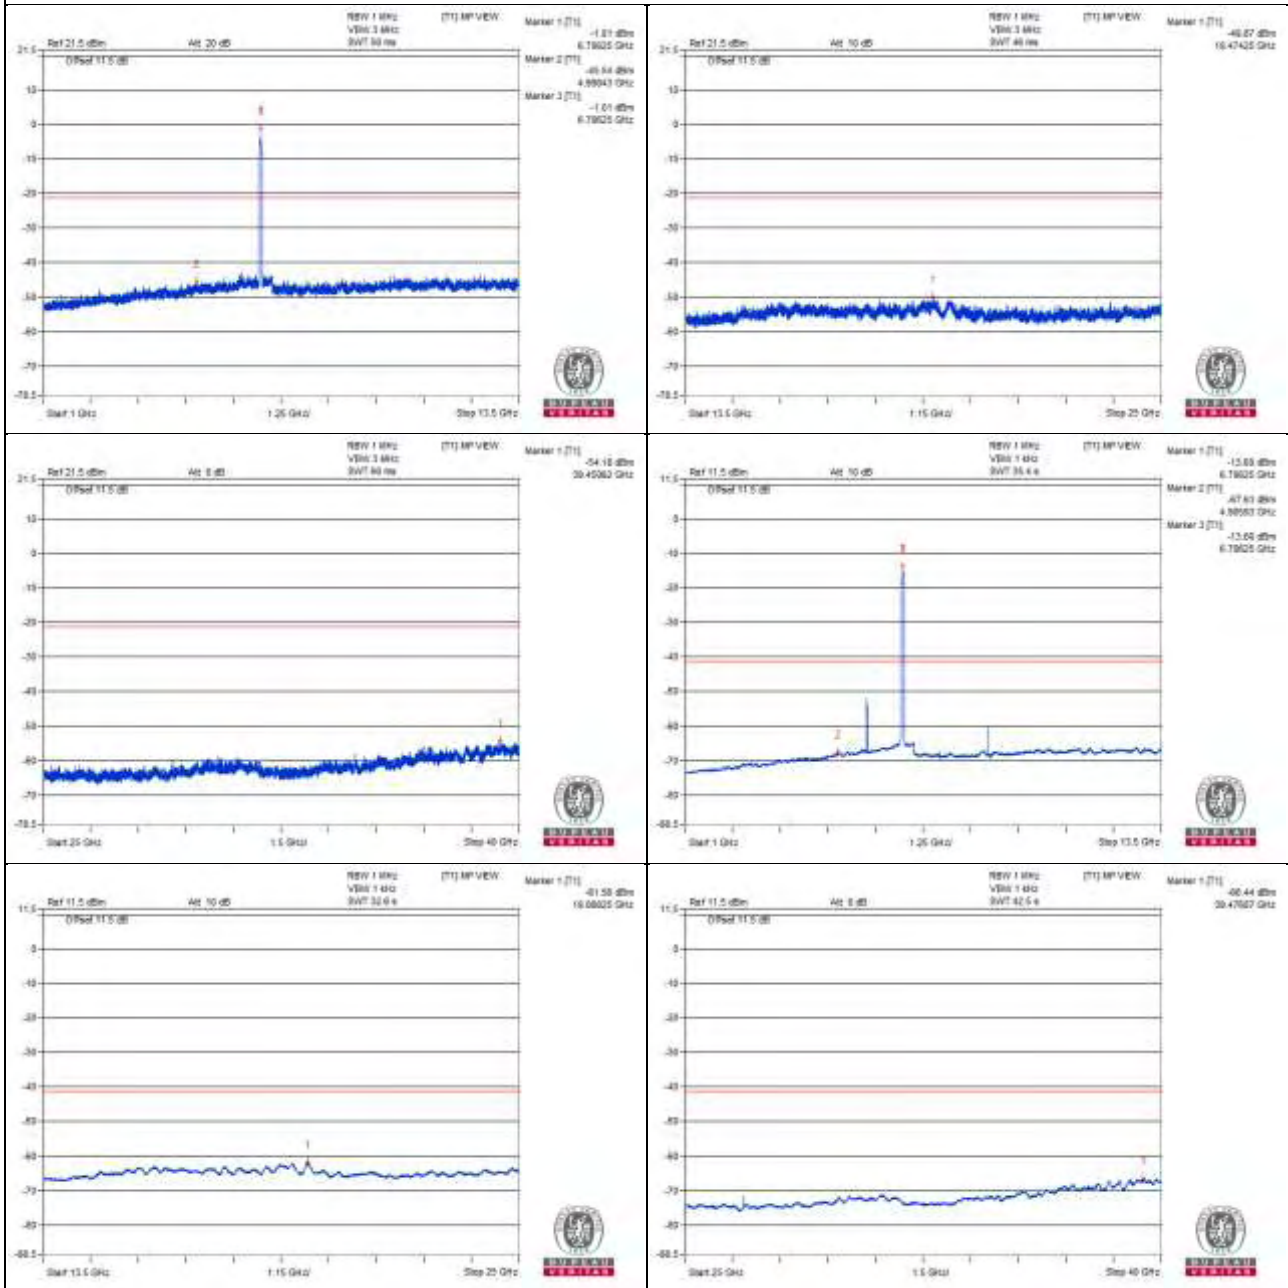

Chain 1

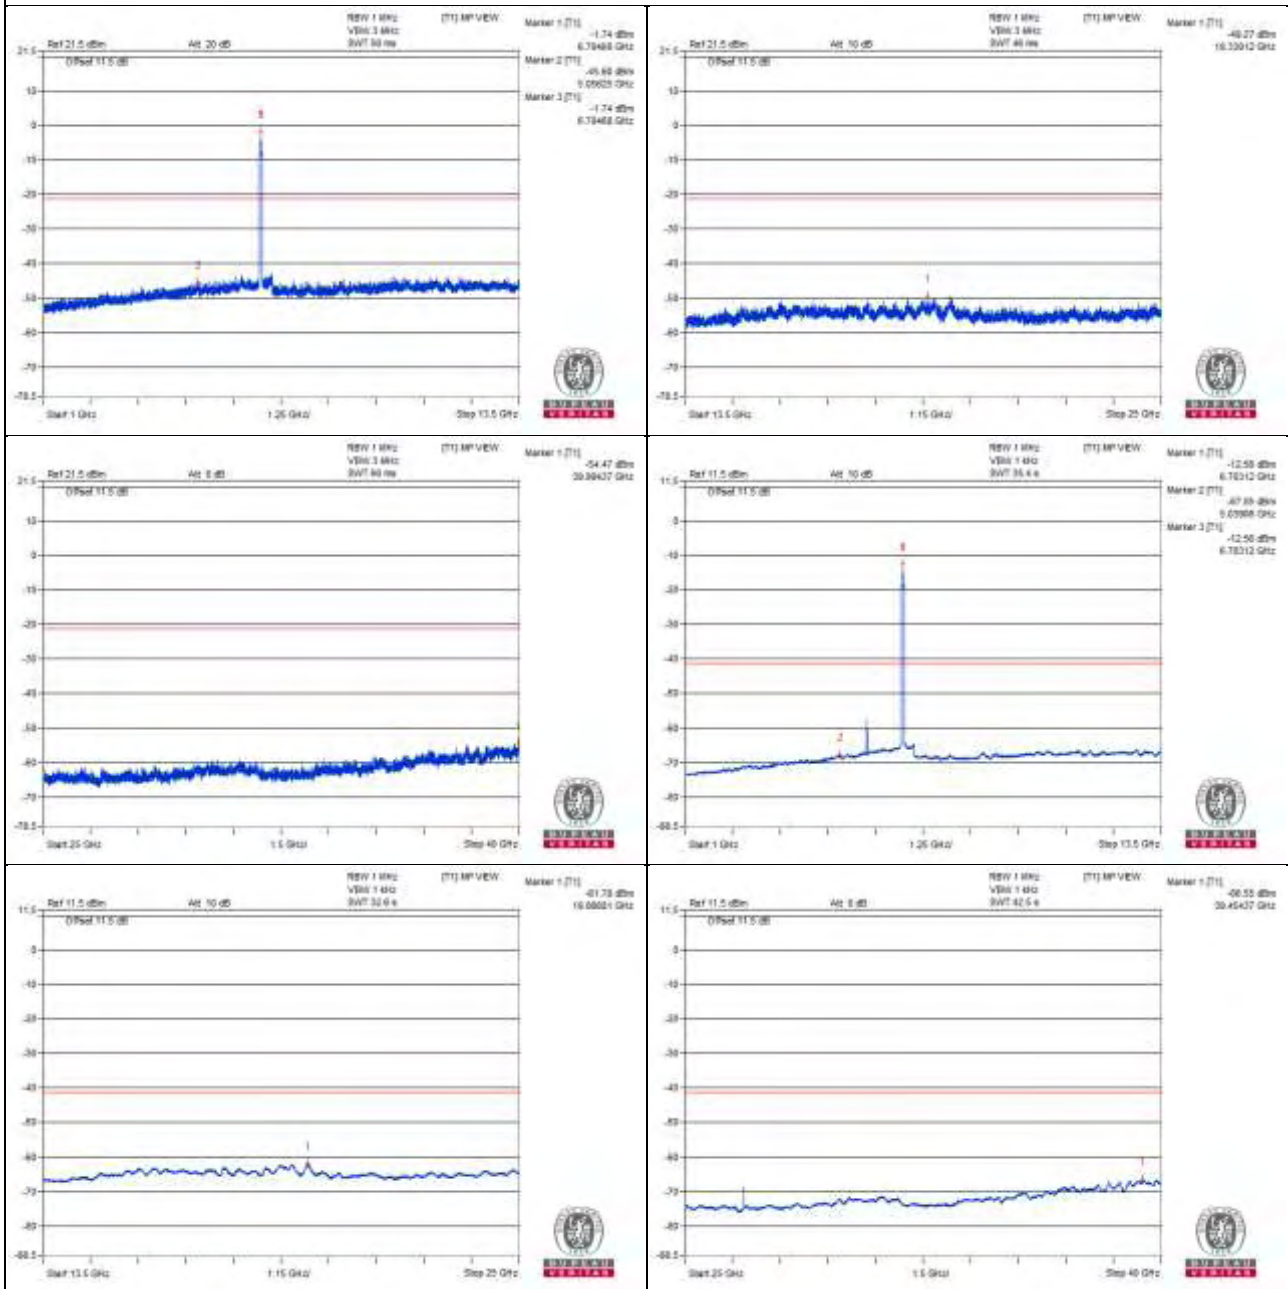

802.11ax (HE80) - Channel 183

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	13731.43 PK	50.32	88.2	-37.88	-55.34	-57.08	8.17	-44.94
2	13737.18 AV	39.66	68.2	-28.54	-66.83	-66.73	8.17	-55.6
3	20586.87 PK	52.71	74	-21.29	-52.58	-55.29	8.17	-42.55
4	20596.93 AV	41.65	54	-12.35	-64.77	-64.82	8.17	-53.61

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

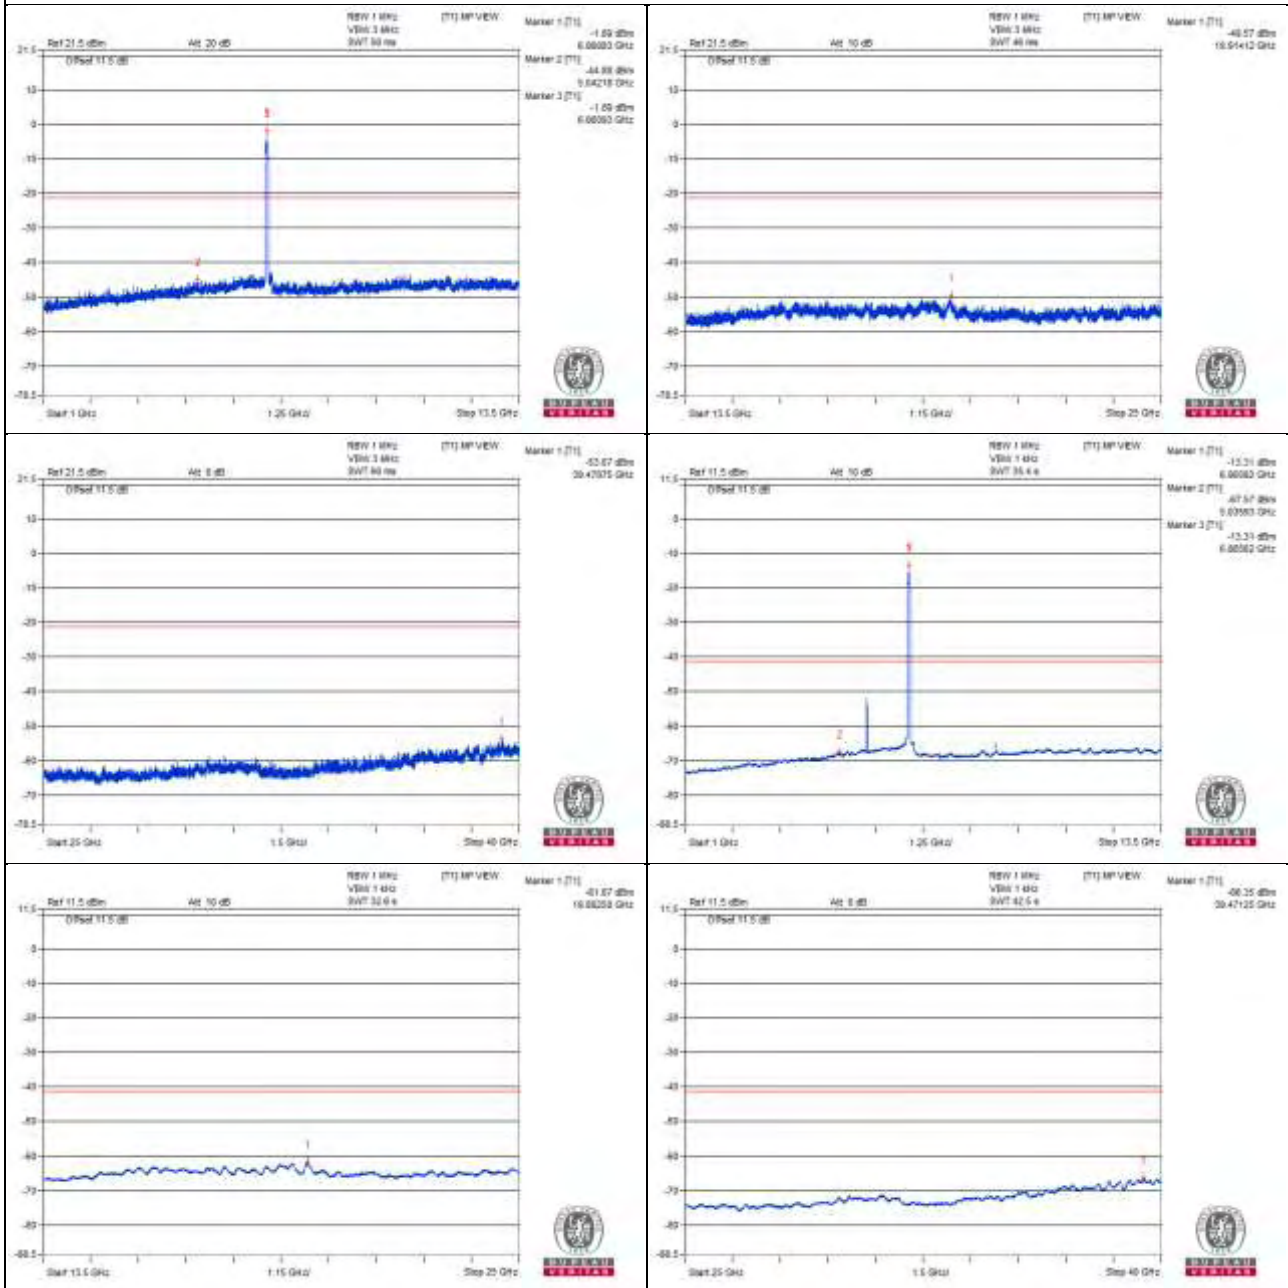

Chain 1

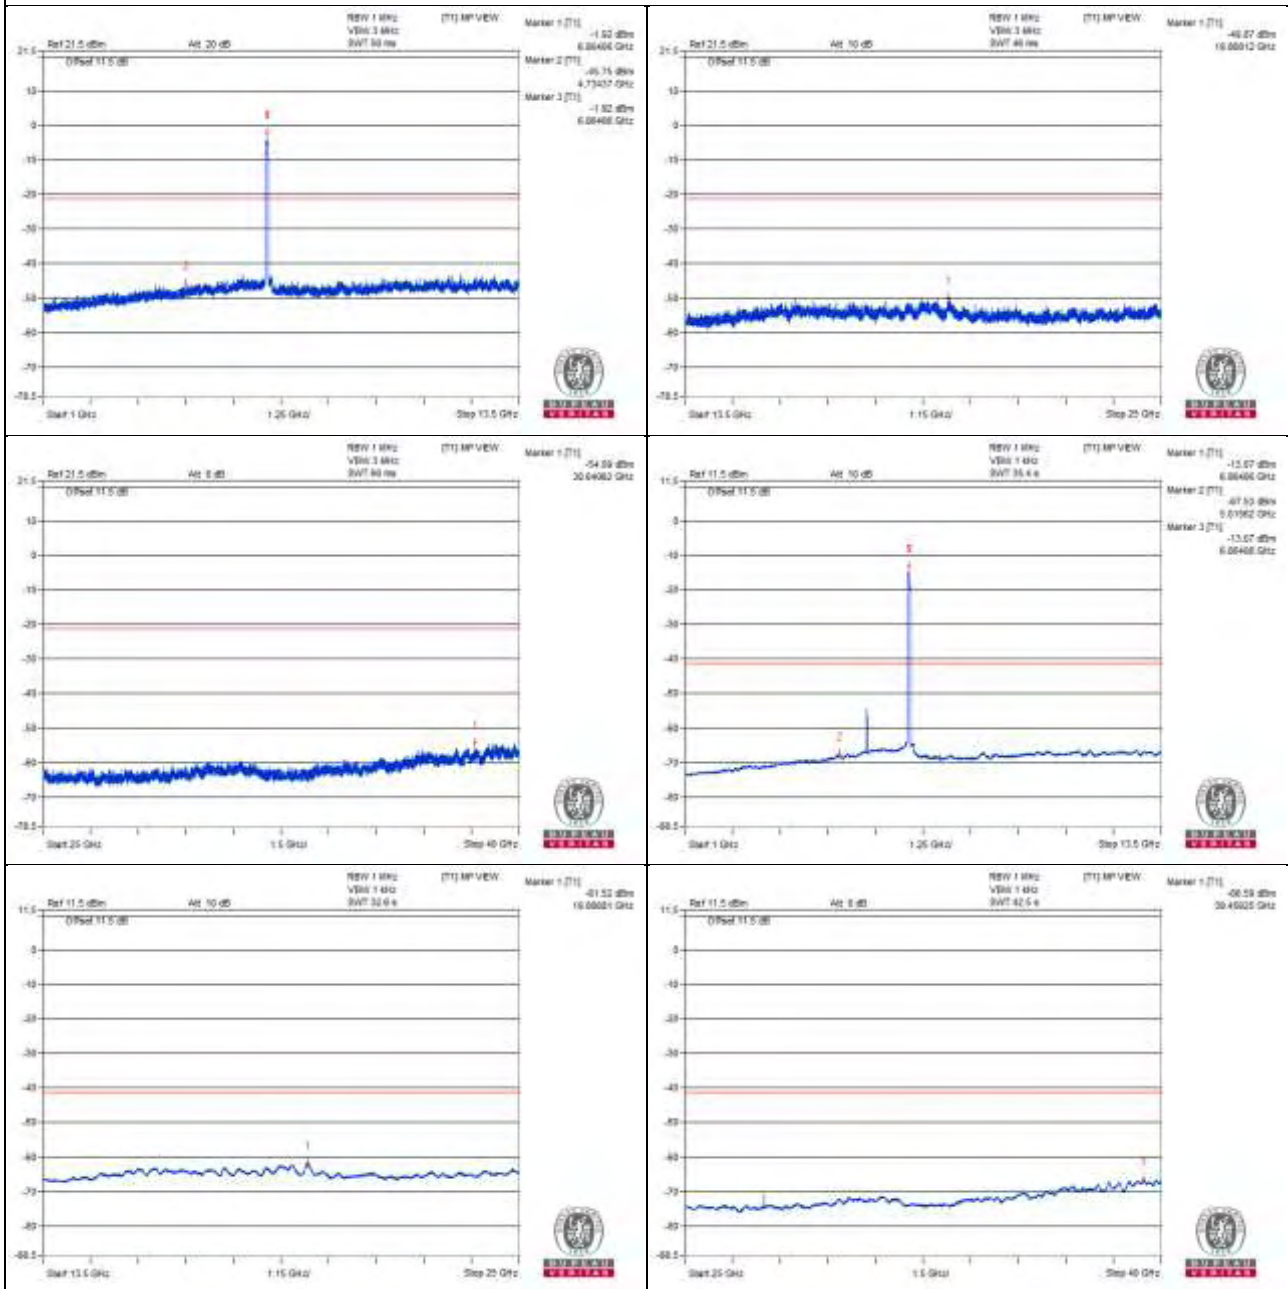

802.11ax (HE80) - Channel 199

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	13891 PK	51.01	88.2	-37.19	-56.72	-54.44	8.17	-44.25
2	13889.56 AV	40.02	68.2	-28.18	-66.61	-66.24	8.17	-55.24
3	20828.37 PK	51.43	74	-22.57	-54.94	-55.09	8.17	-43.83
4	20829.81 AV	40.77	54	-13.23	-65.54	-65.81	8.17	-54.49

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

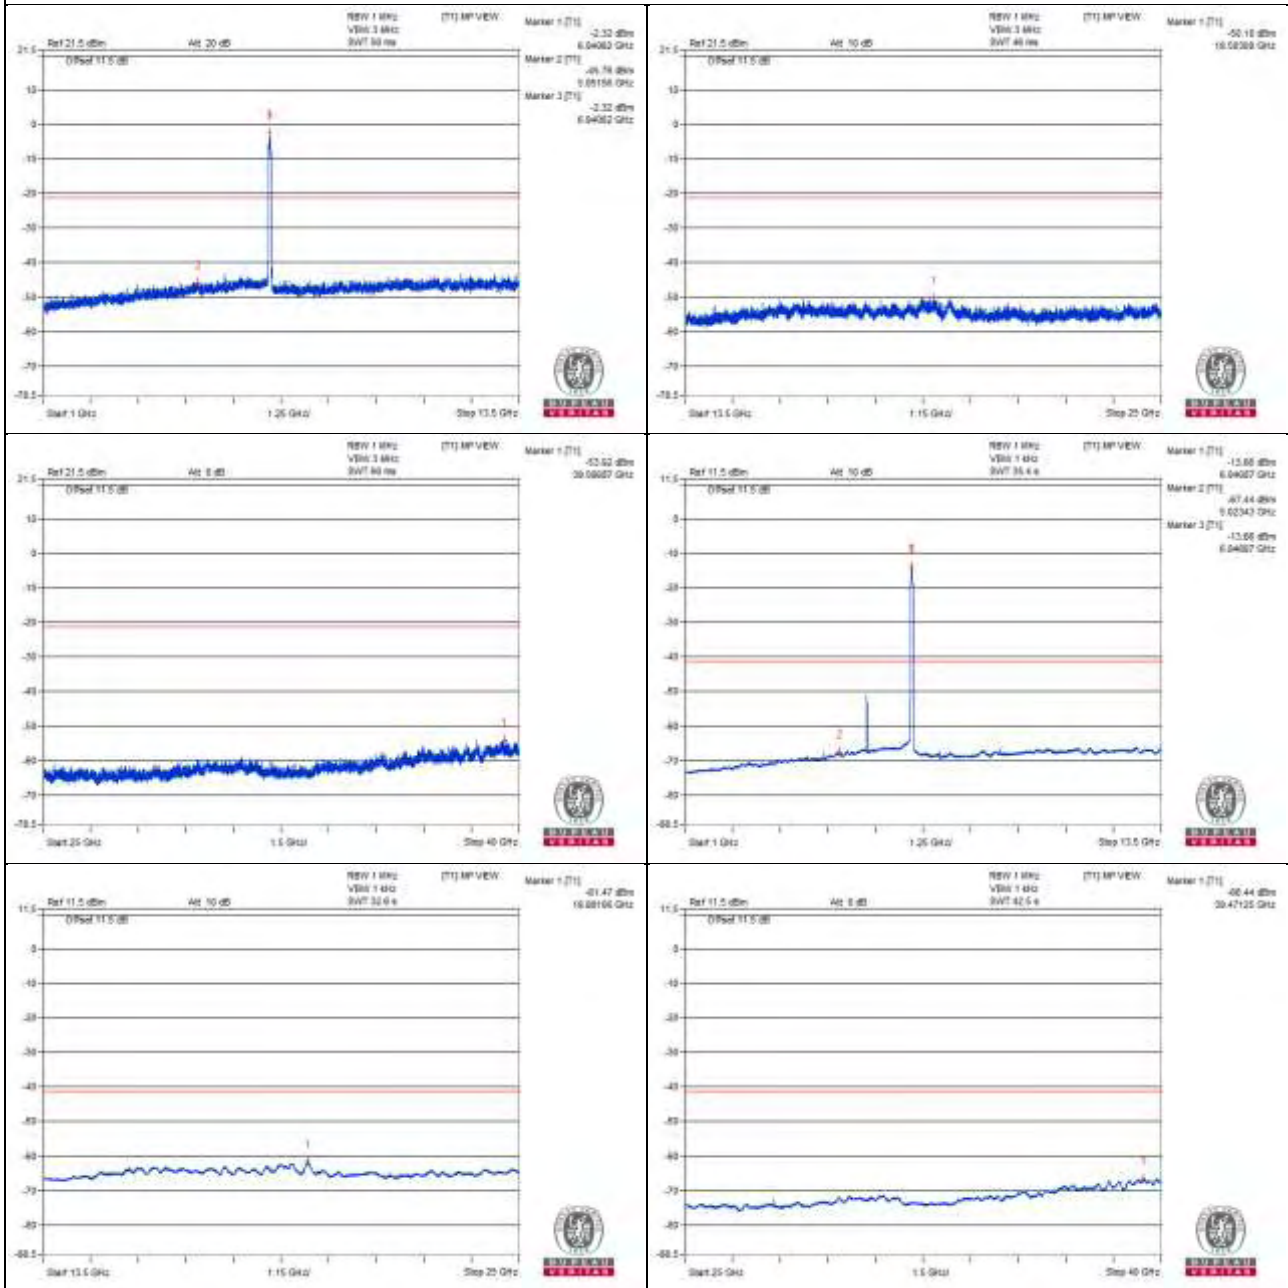

Chain 1

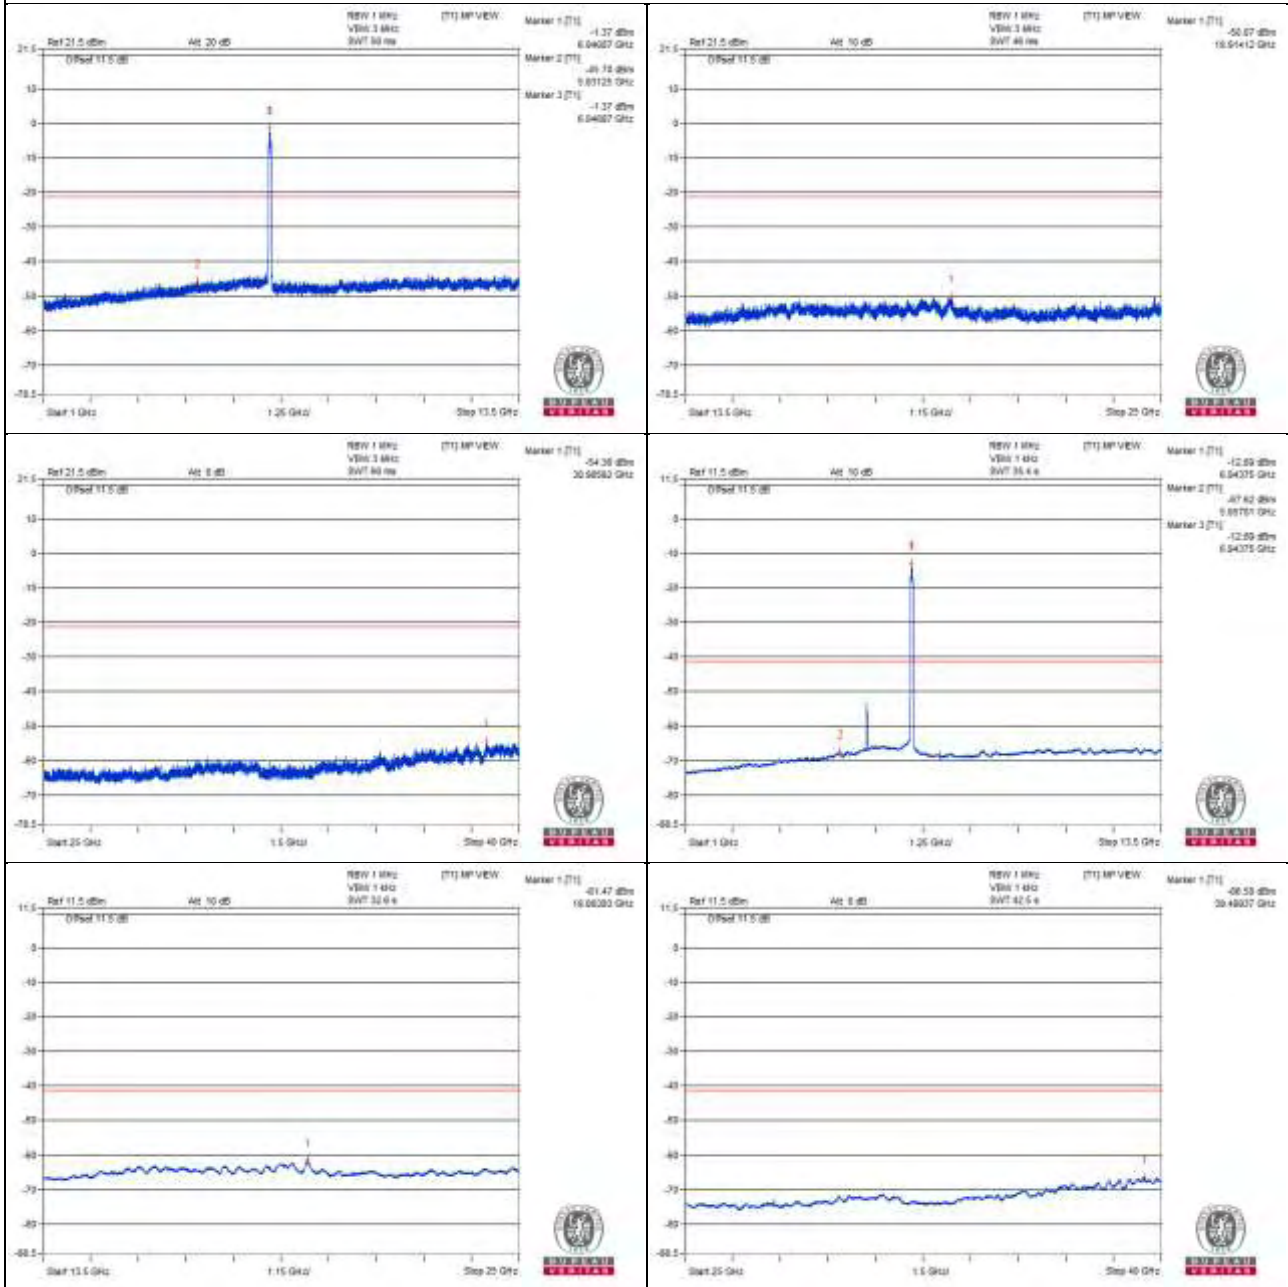

802.11ax (HE80) - Channel 215

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	14053.43 PK	50.24	88.2	-37.96	-56.04	-56.36	8.17	-45.02
2	14052 AV	39.8	68.2	-28.4	-66.59	-66.69	8.17	-55.46
3	21084.25 PK	52.35	74	-21.65	-54.41	-53.79	8.17	-42.91
4	21067 AV	41.09	54	-12.91	-65.22	-65.49	8.17	-54.17

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

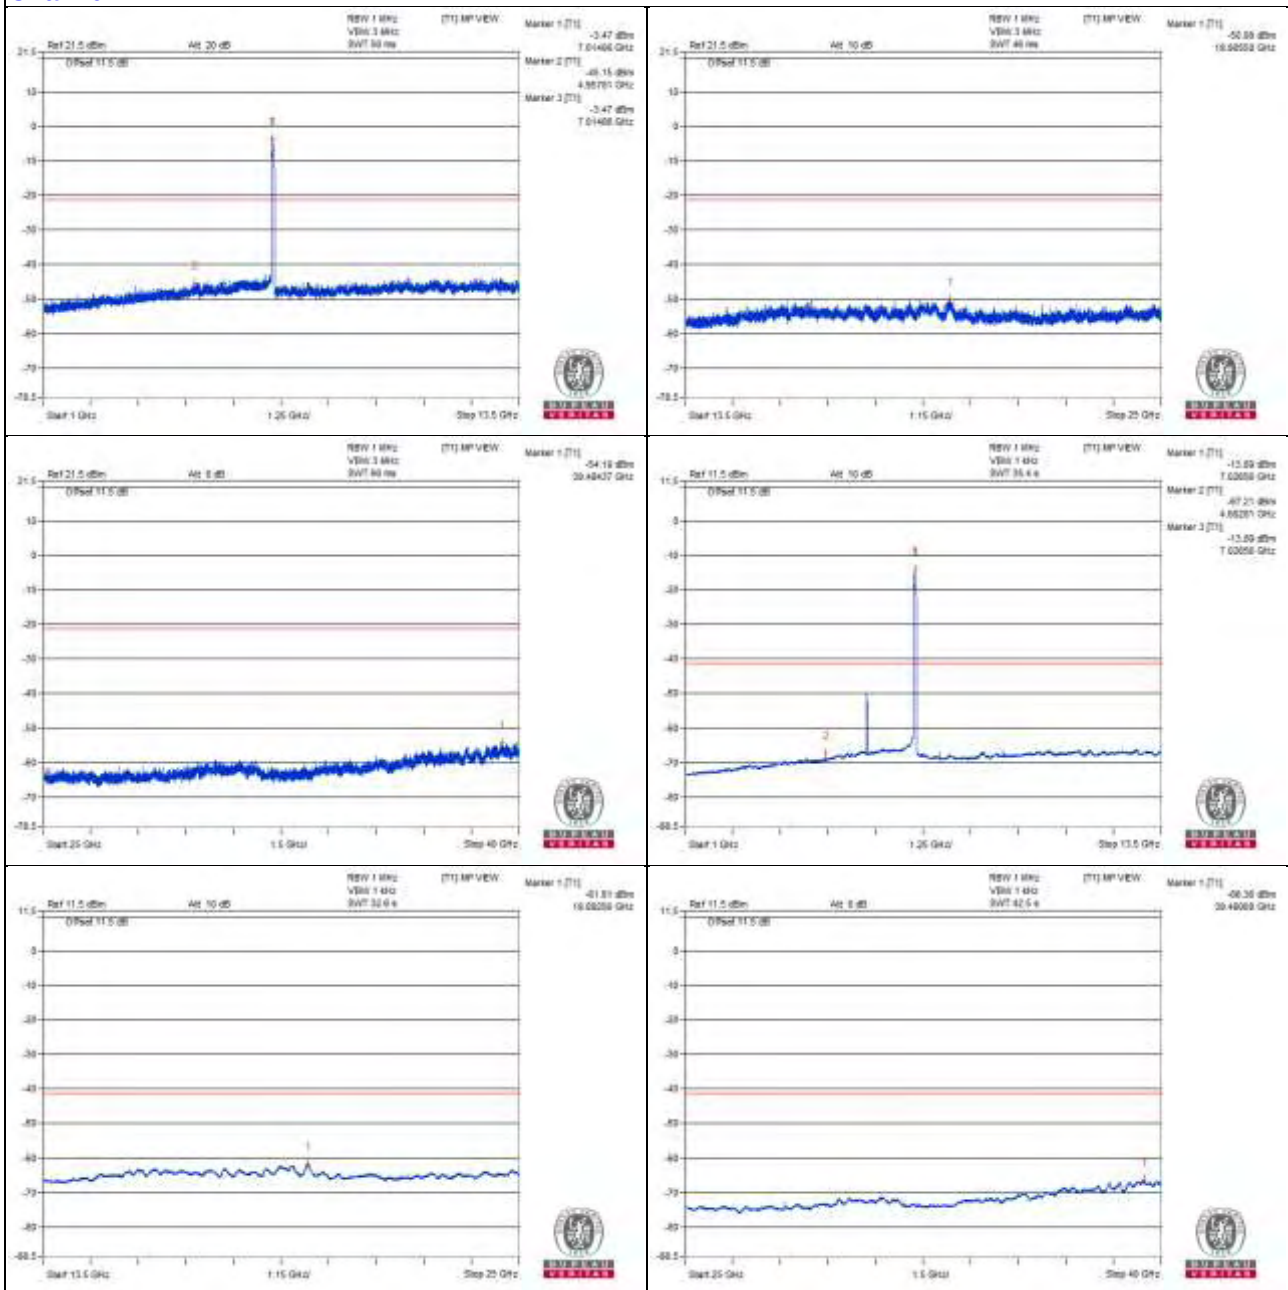

Chain 1

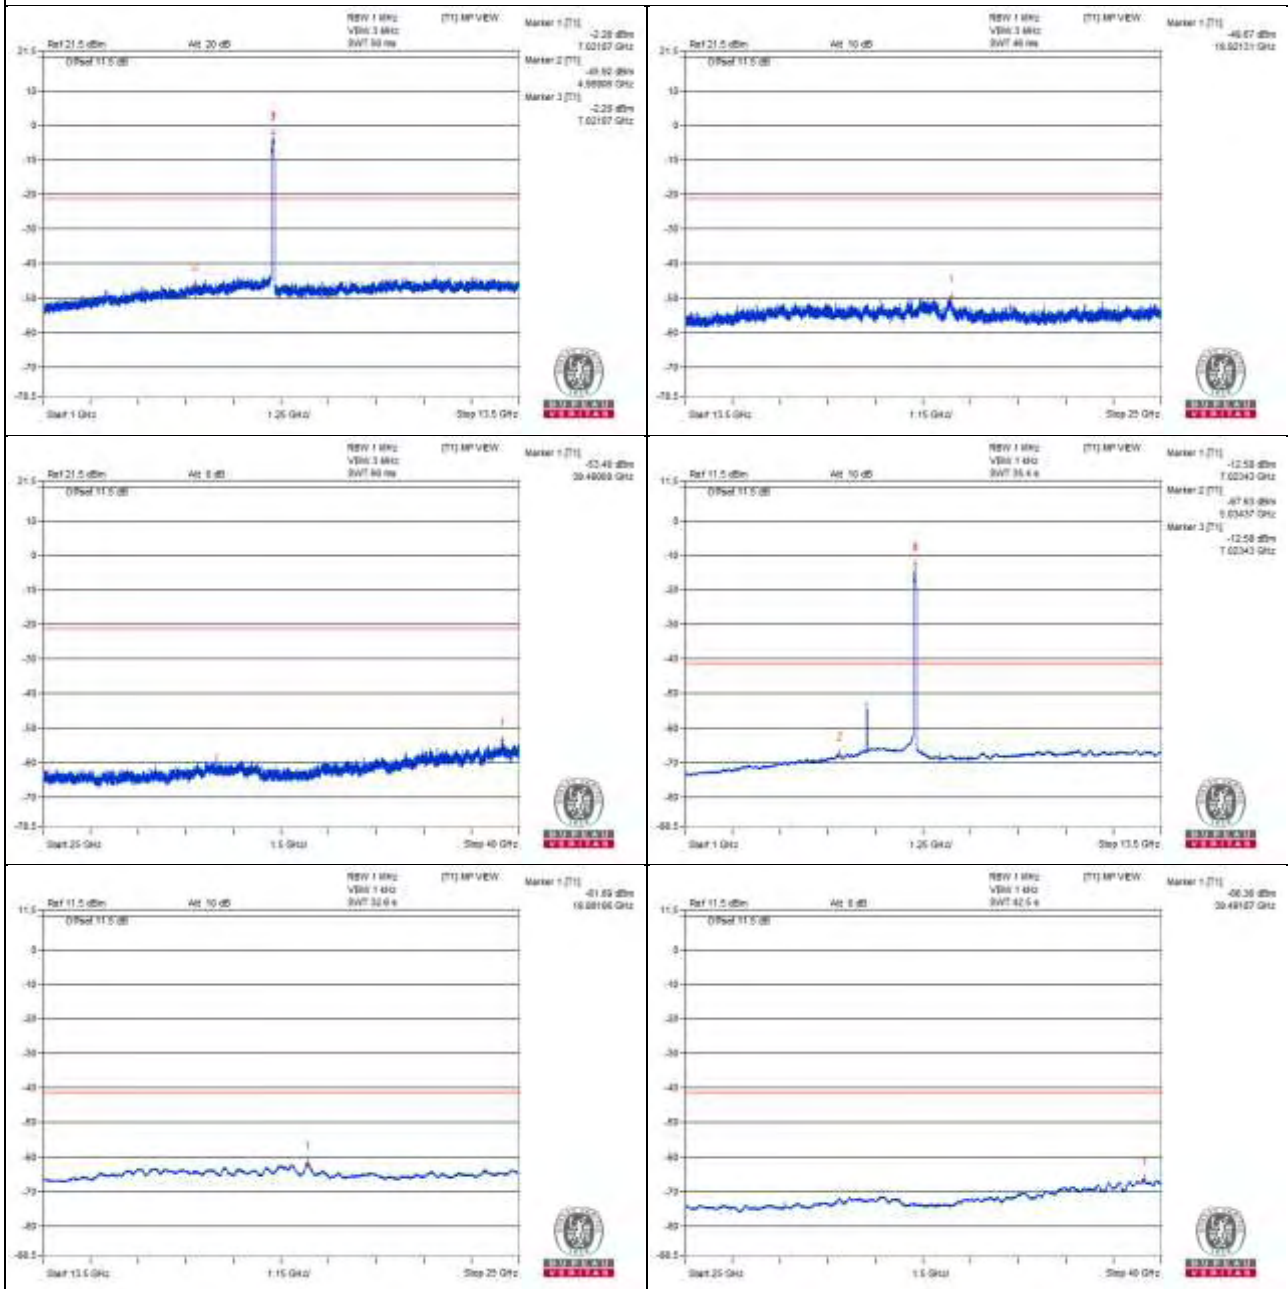

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	7205.35 PK	60.58	88.2	-27.62	-45.97	-45.67	8.13	-34.68
2	7199.85 AV	47.38	68.2	-20.82	-59.06	-58.99	8.13	-47.88

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

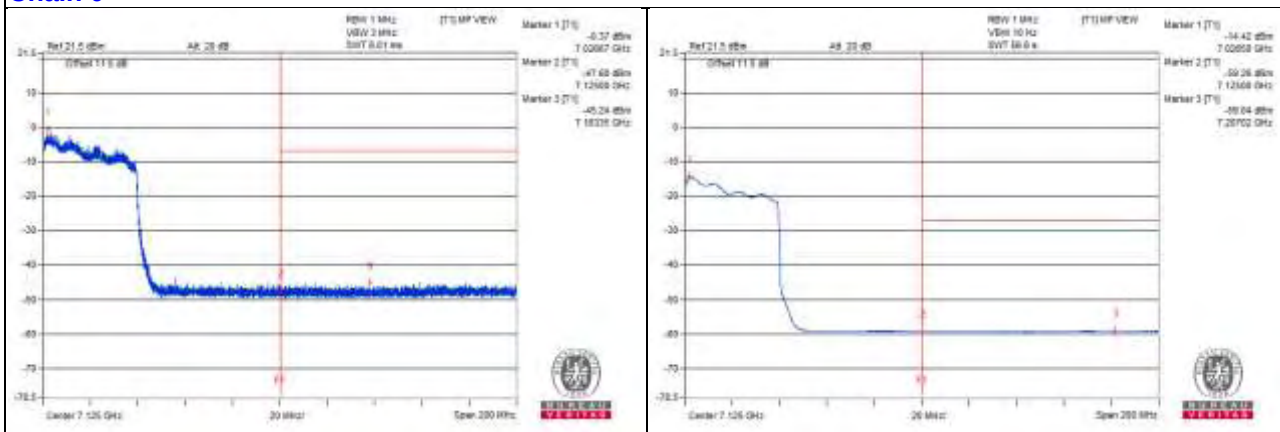

Chain 1

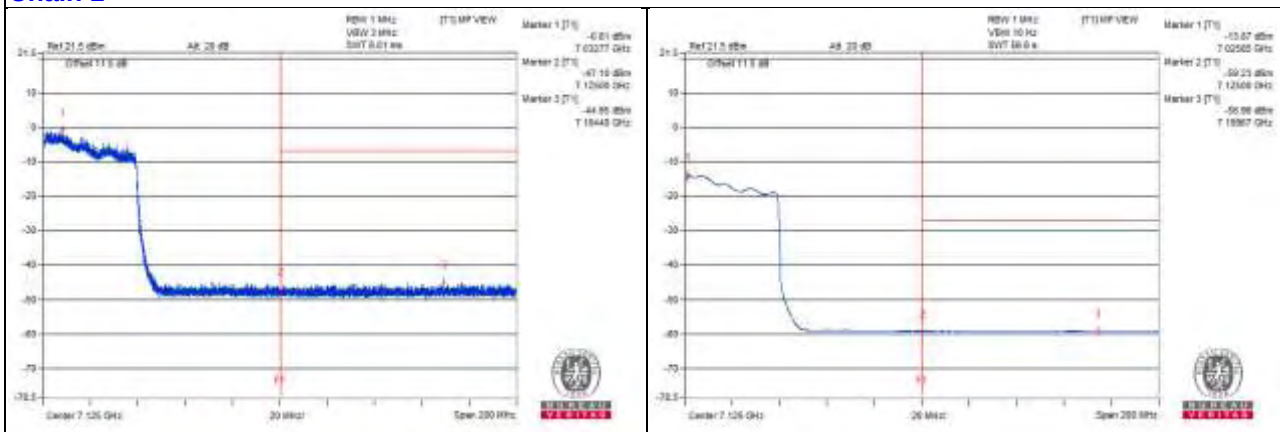

802.11ax (HE160) - Channel 15

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	12054.68 PK	61.59	74	-12.41	-45.32	-44.42	8.17	-33.67
2	12050 AV	39.4	54	-14.6	-67.08	-67.01	8.17	-55.86
3	18081.31 PK	52.25	74	-21.75	-52.95	-55.92	8.17	-43.01
4	18075.56 AV	41.35	54	-12.65	-64.97	-65.22	8.17	-53.91

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

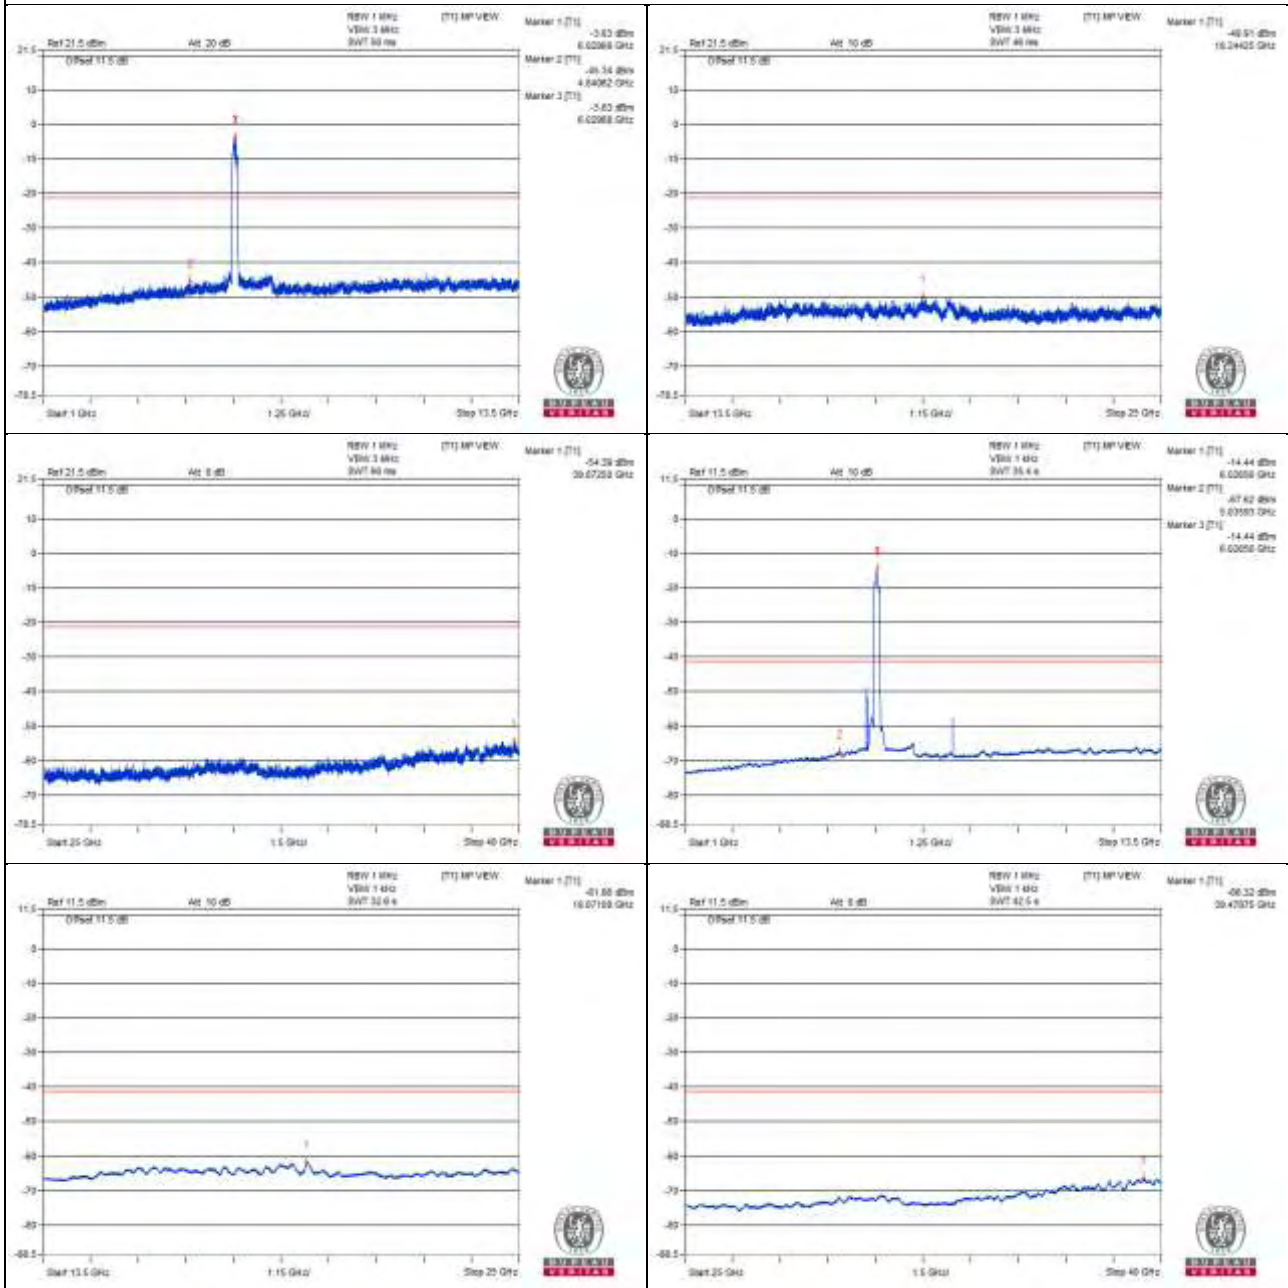

Chain 1

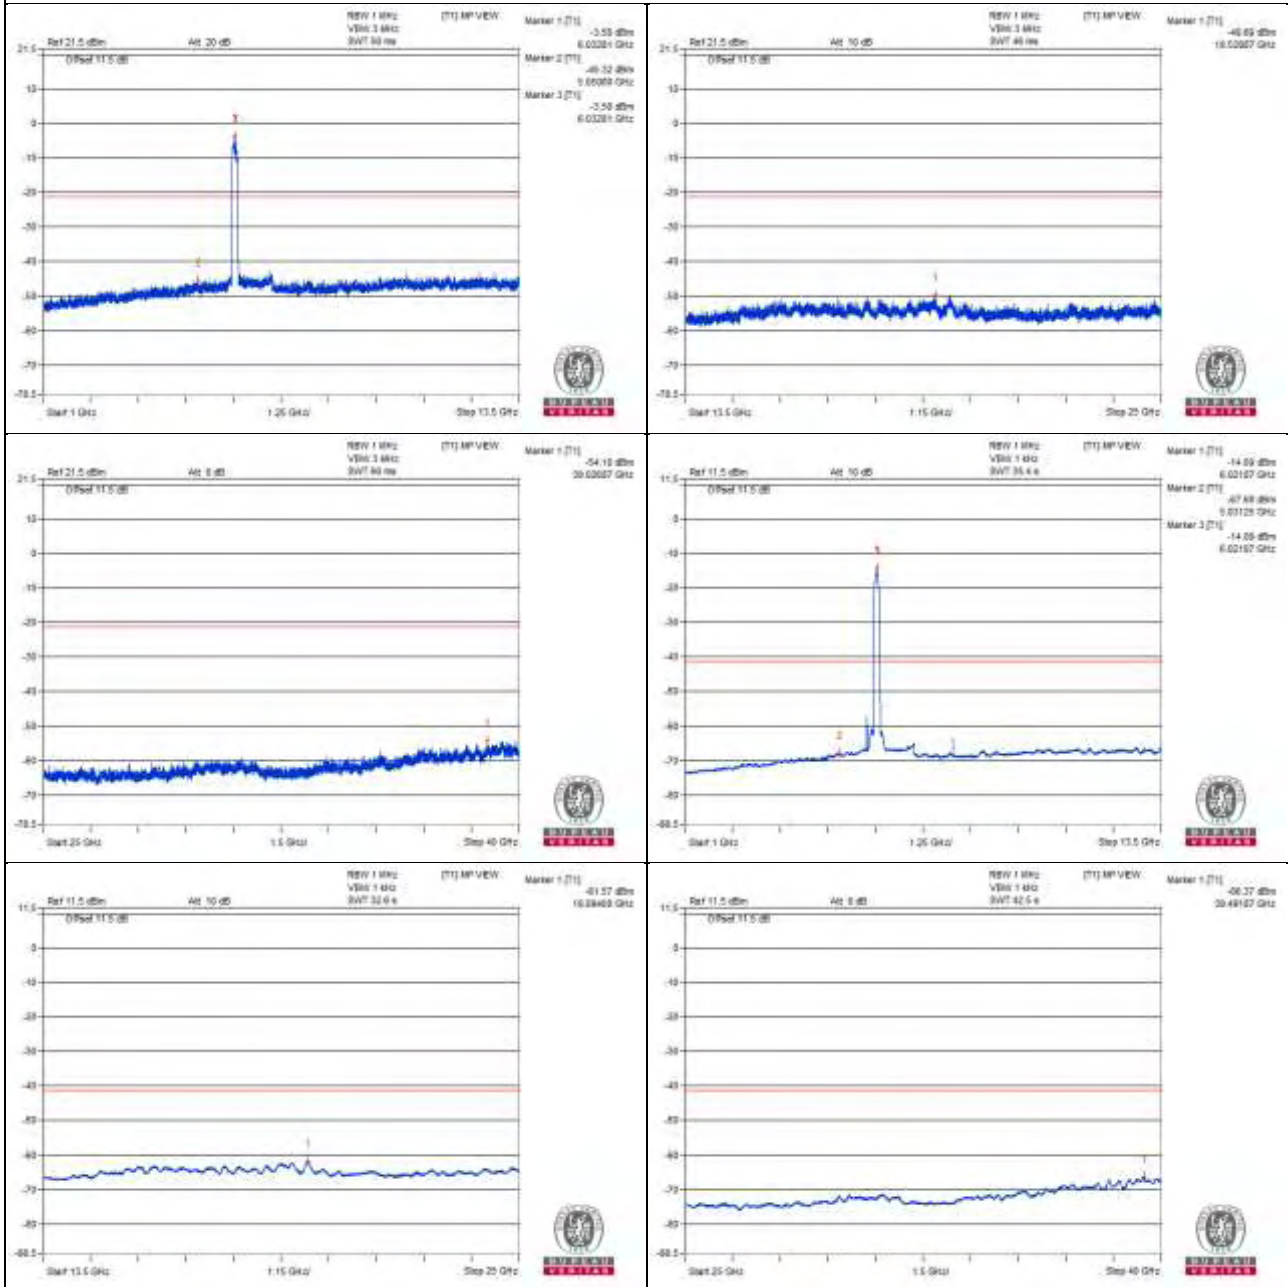

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5888.95 PK	63.98	88.2	-24.22	-41.08	-44.44	8.15	-31.28
2	5884.6 AV	50.19	68.2	-18.01	-55.48	-57.13	8.15	-45.07

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

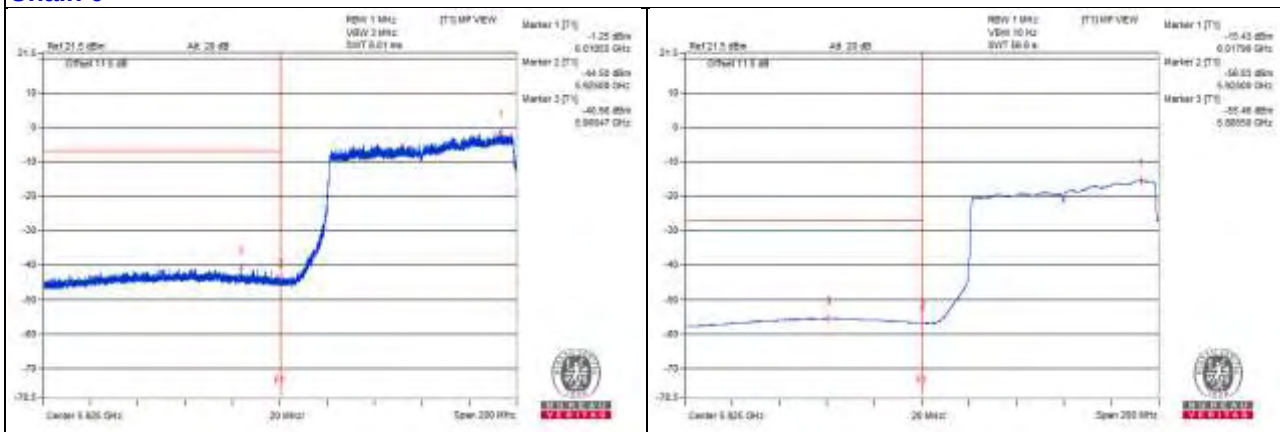

Chain 1

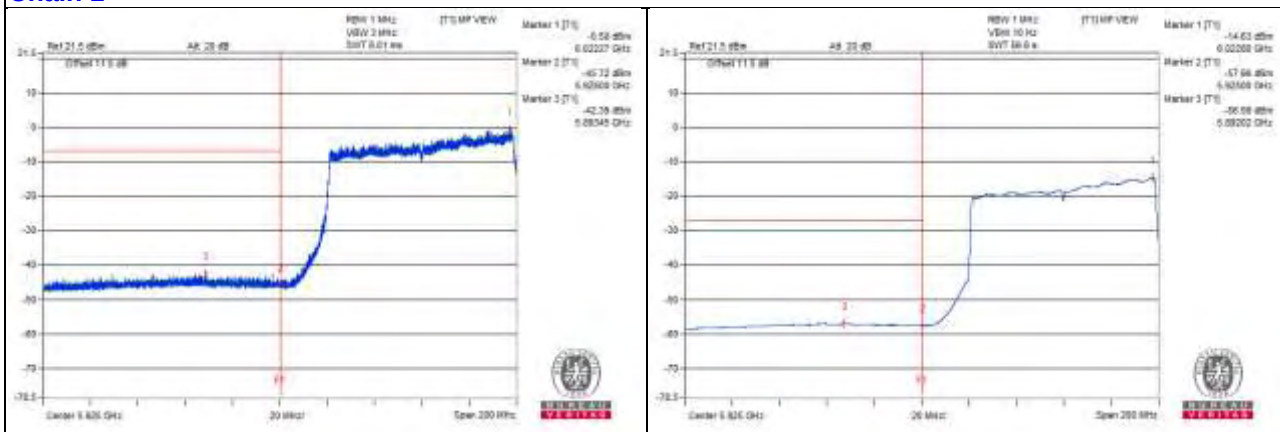

802.11ax (HE160) - Channel 47

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	12365.62 PK	60.43	74	-13.57	-45	-47.33	8.17	-34.83
2	12370.31 AV	39.45	54	-14.55	-67.04	-66.94	8.17	-55.81
3	18547.06 PK	53.33	74	-20.67	-54.03	-52.35	8.17	-41.93
4	18558.56 AV	42.64	54	-11.36	-63.52	-64.11	8.17	-52.62

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

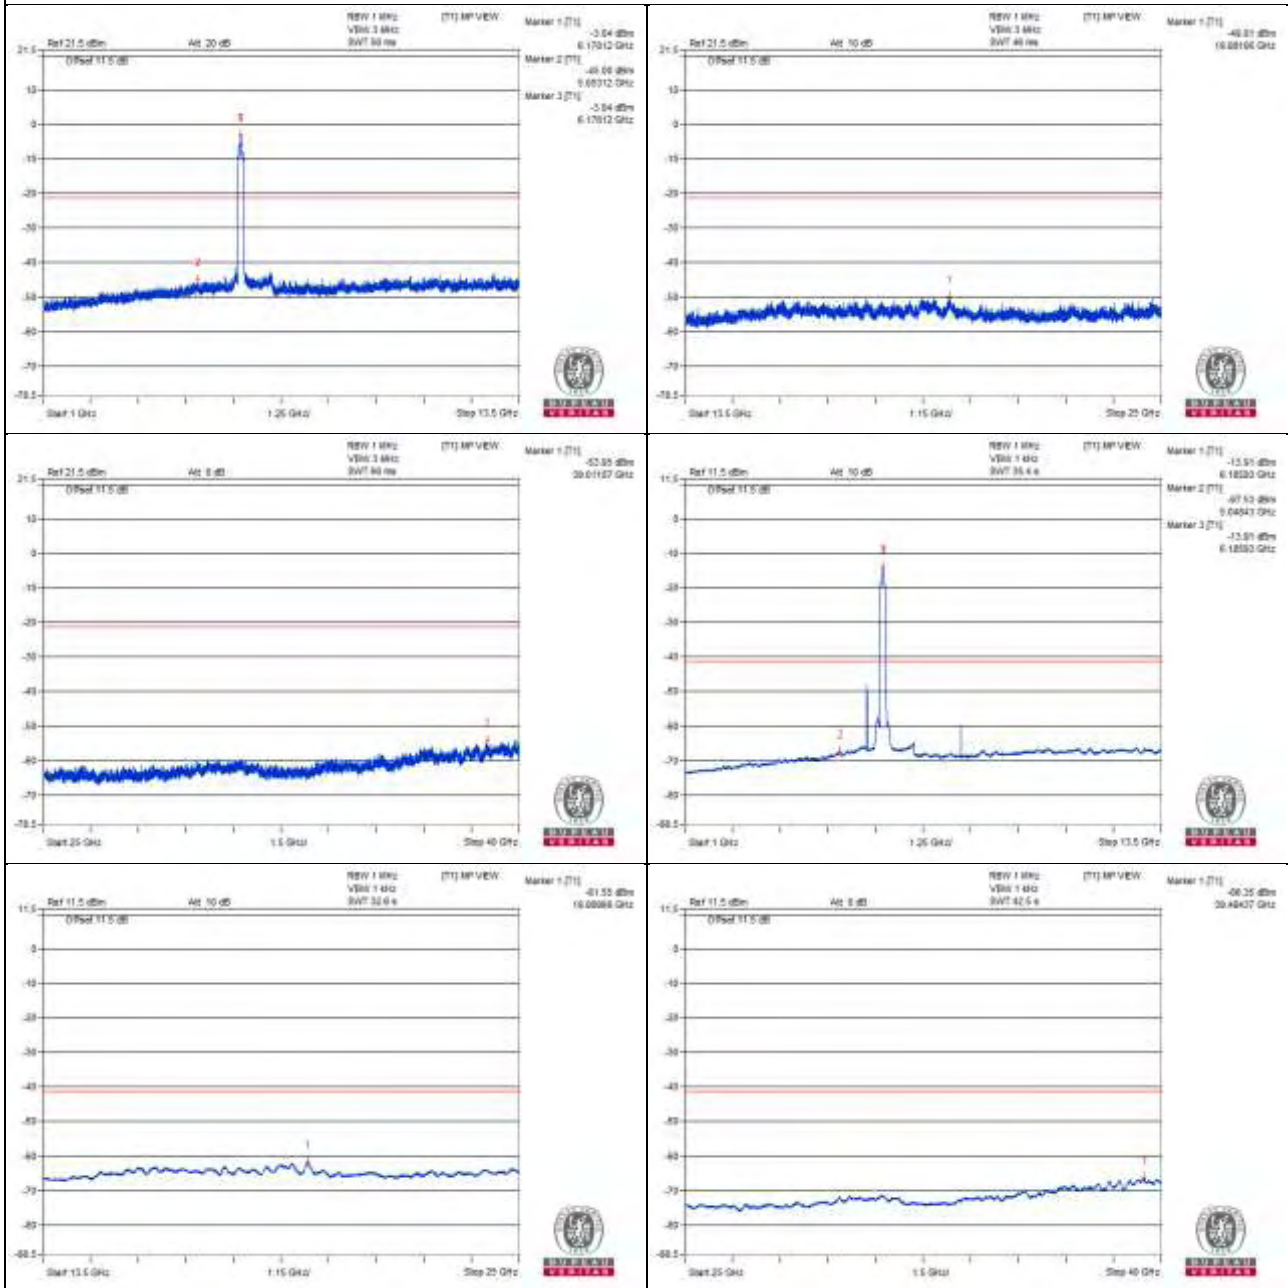

Chain 1

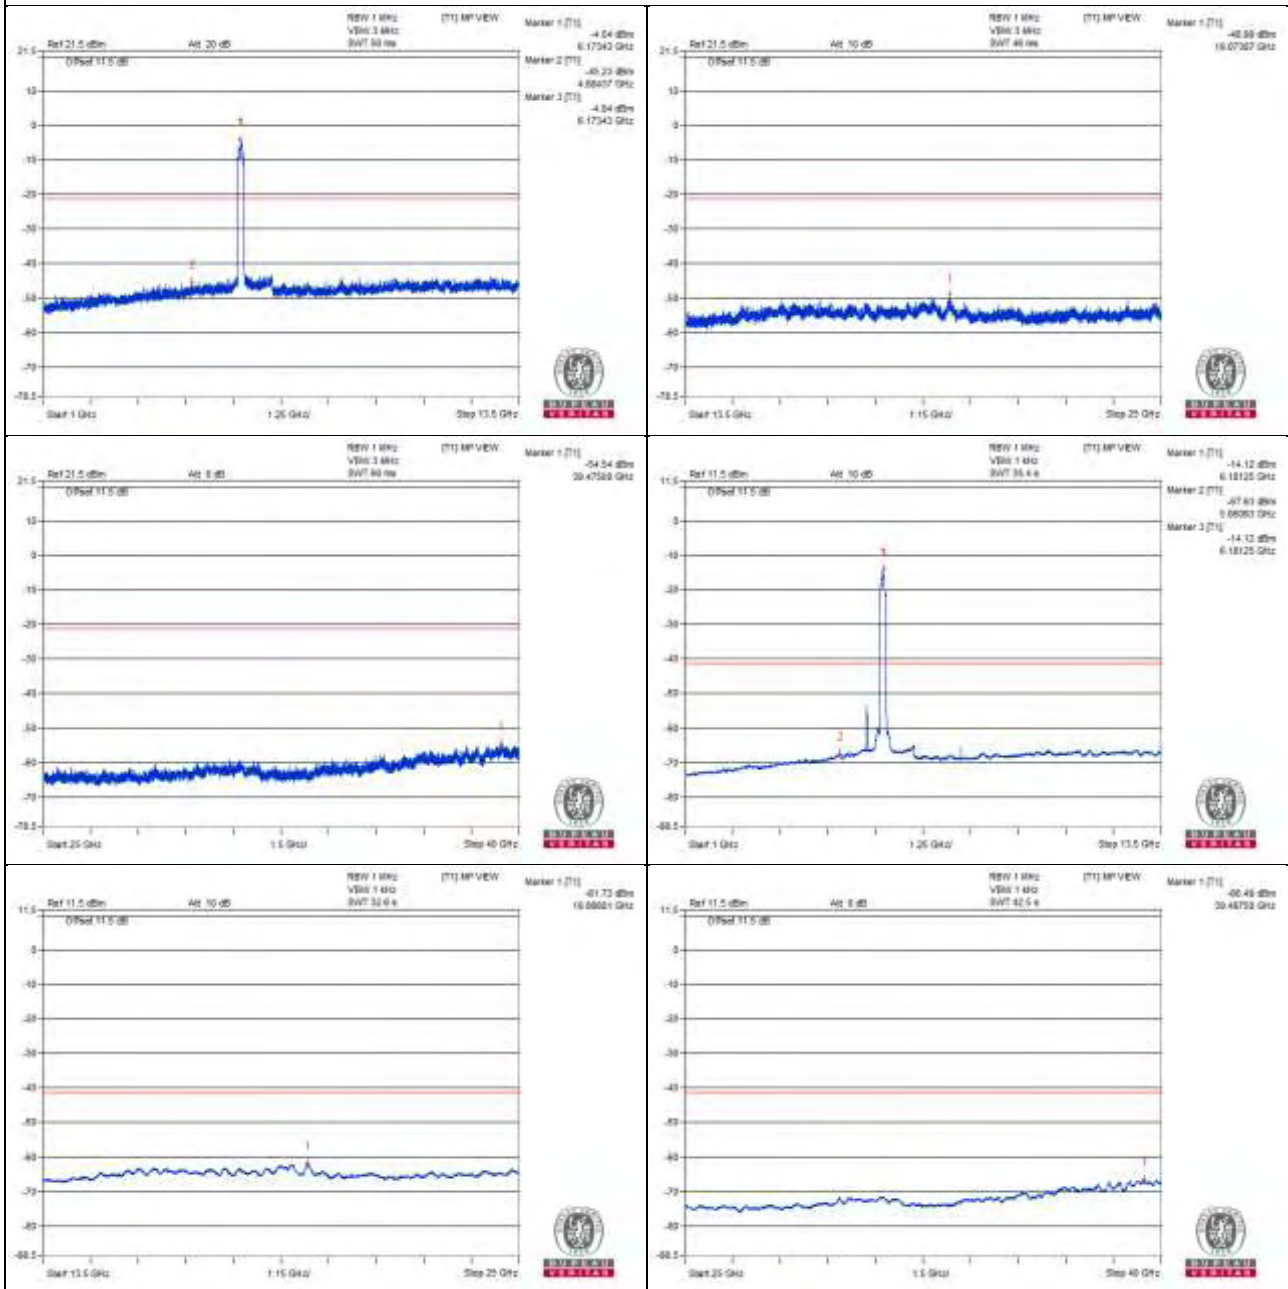

802.11ax (HE160) - Channel 79

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	12687.5 PK	61.16	74	-12.84	-45.65	-44.94	8.17	-34.1
2	12692.18 AV	39.37	54	-14.63	-67	-67.14	8.17	-55.89
3	19041.56 PK	53.57	74	-20.43	-53.69	-52.18	8.17	-41.69
4	19041.56 AV	42.02	54	-11.98	-64.36	-64.48	8.17	-53.24

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

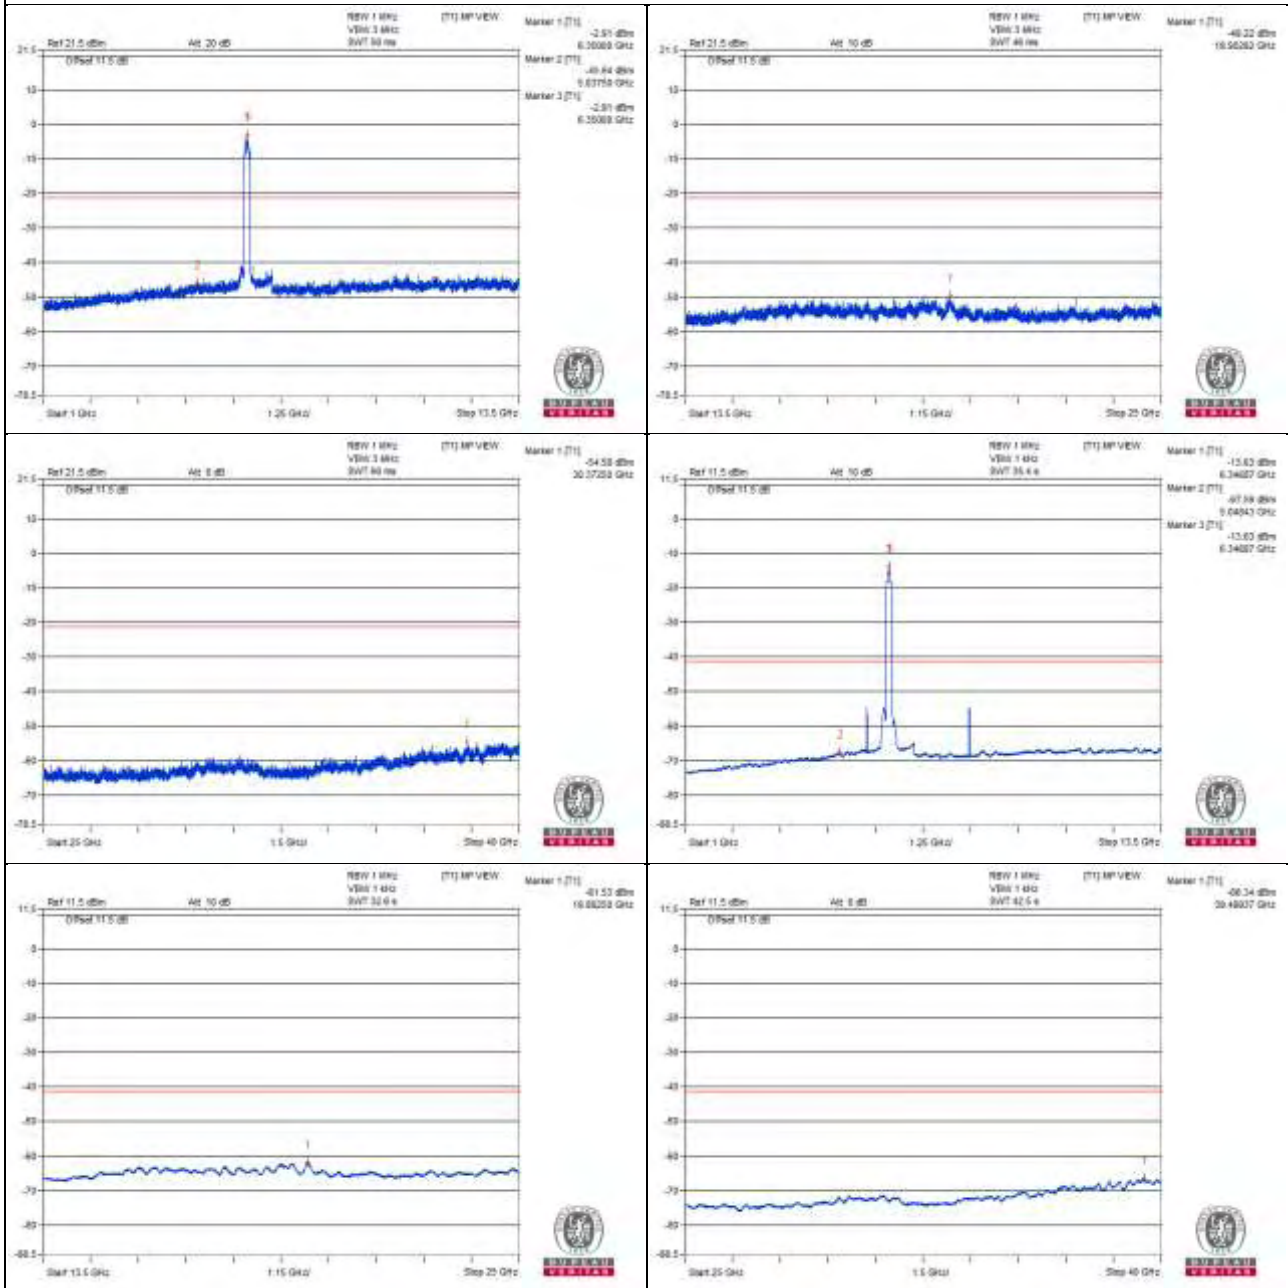

Chain 1

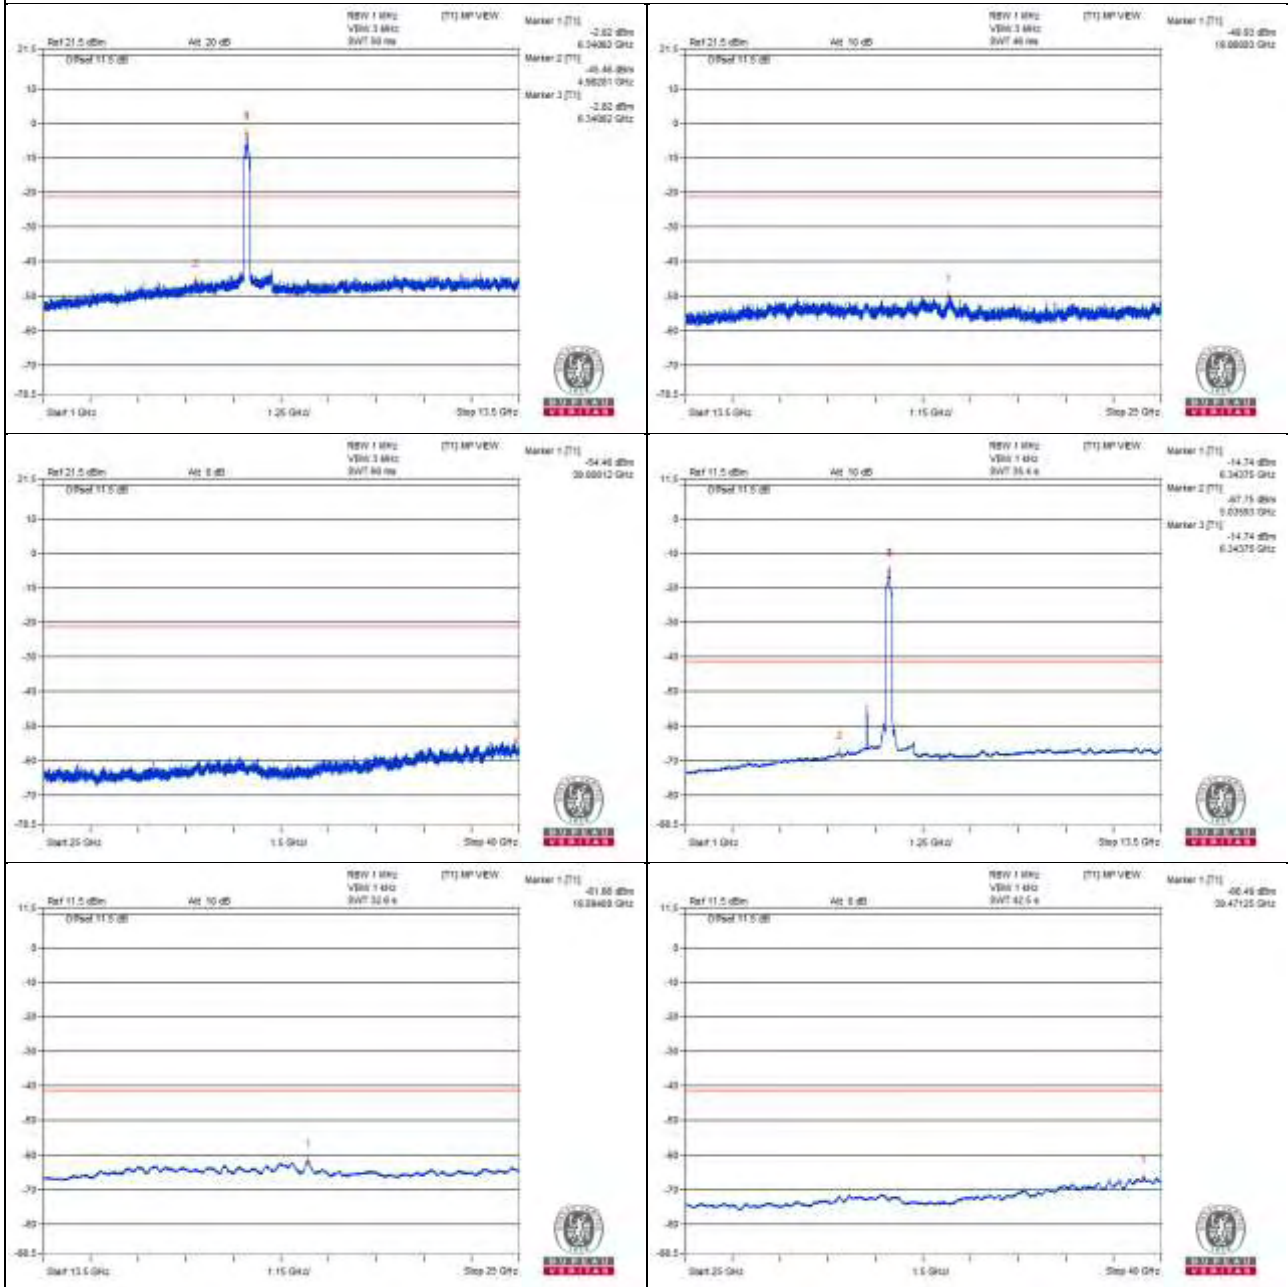

802.11ax (HE160) - Channel 111

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	13000 PK	60.48	88.2	-27.72	-47.31	-44.94	8.17	-34.78
2	13012.5 AV	39	68.2	-29.2	-67.52	-67.37	8.17	-56.26
3	19507.31 PK	55.19	74	-18.81	-53.78	-49.66	8.17	-40.07
4	19518.81 AV	44.15	54	-9.85	-62.18	-62.41	8.17	-51.11

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

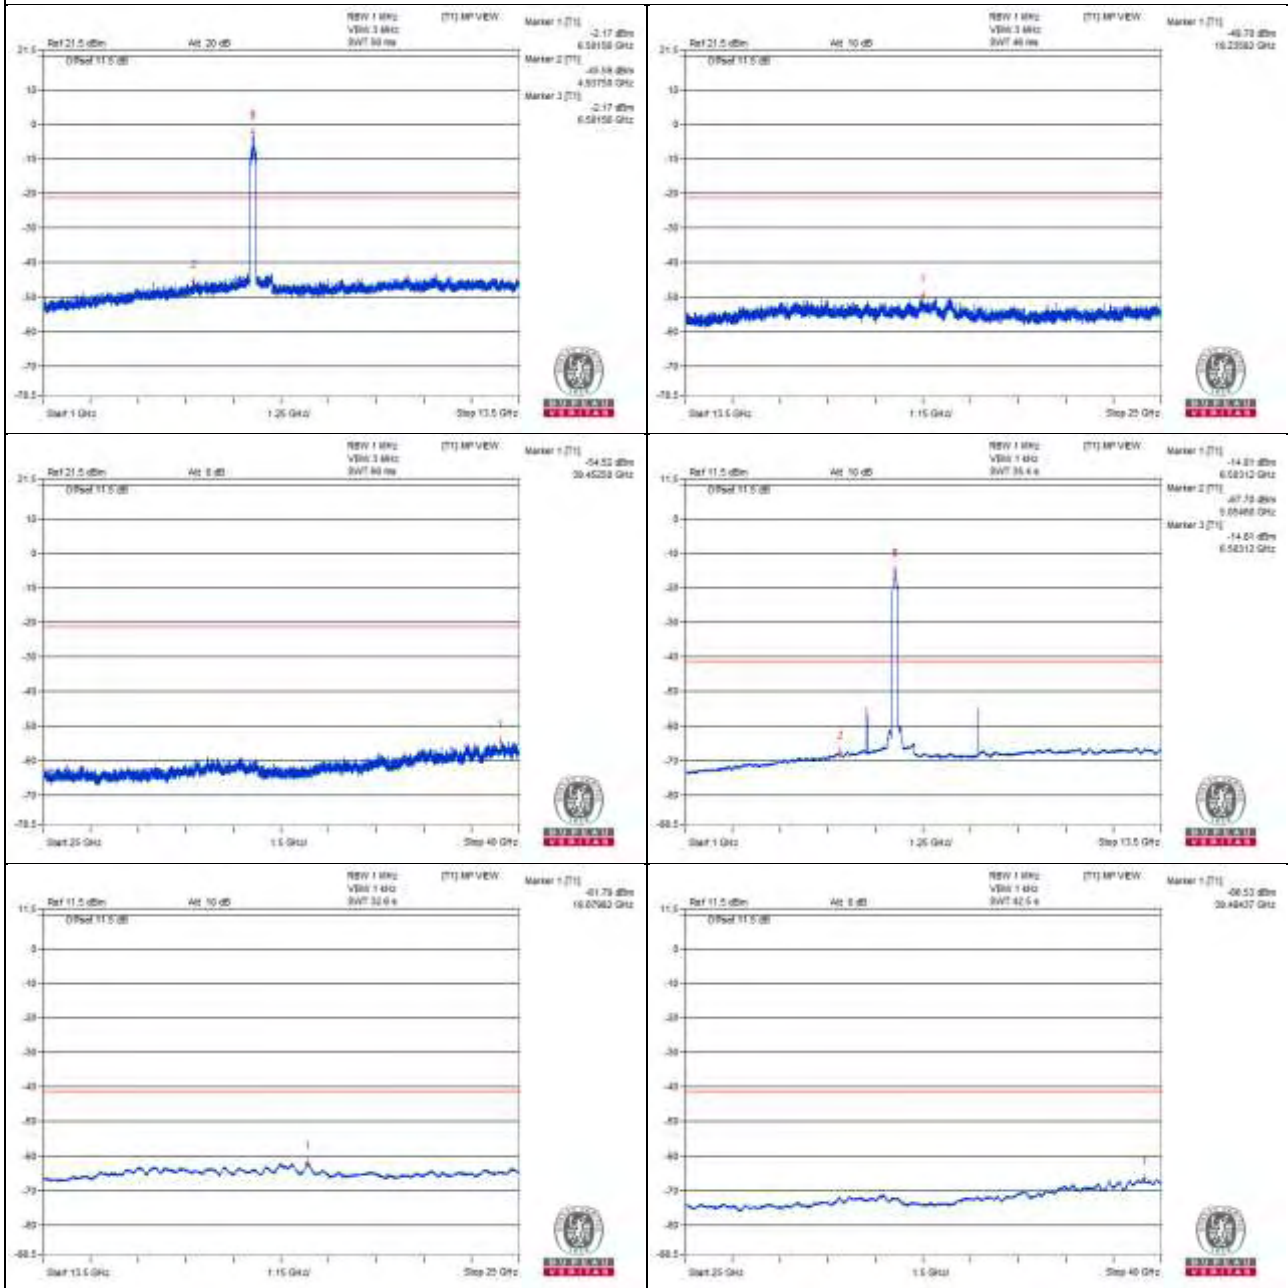

Chain 1

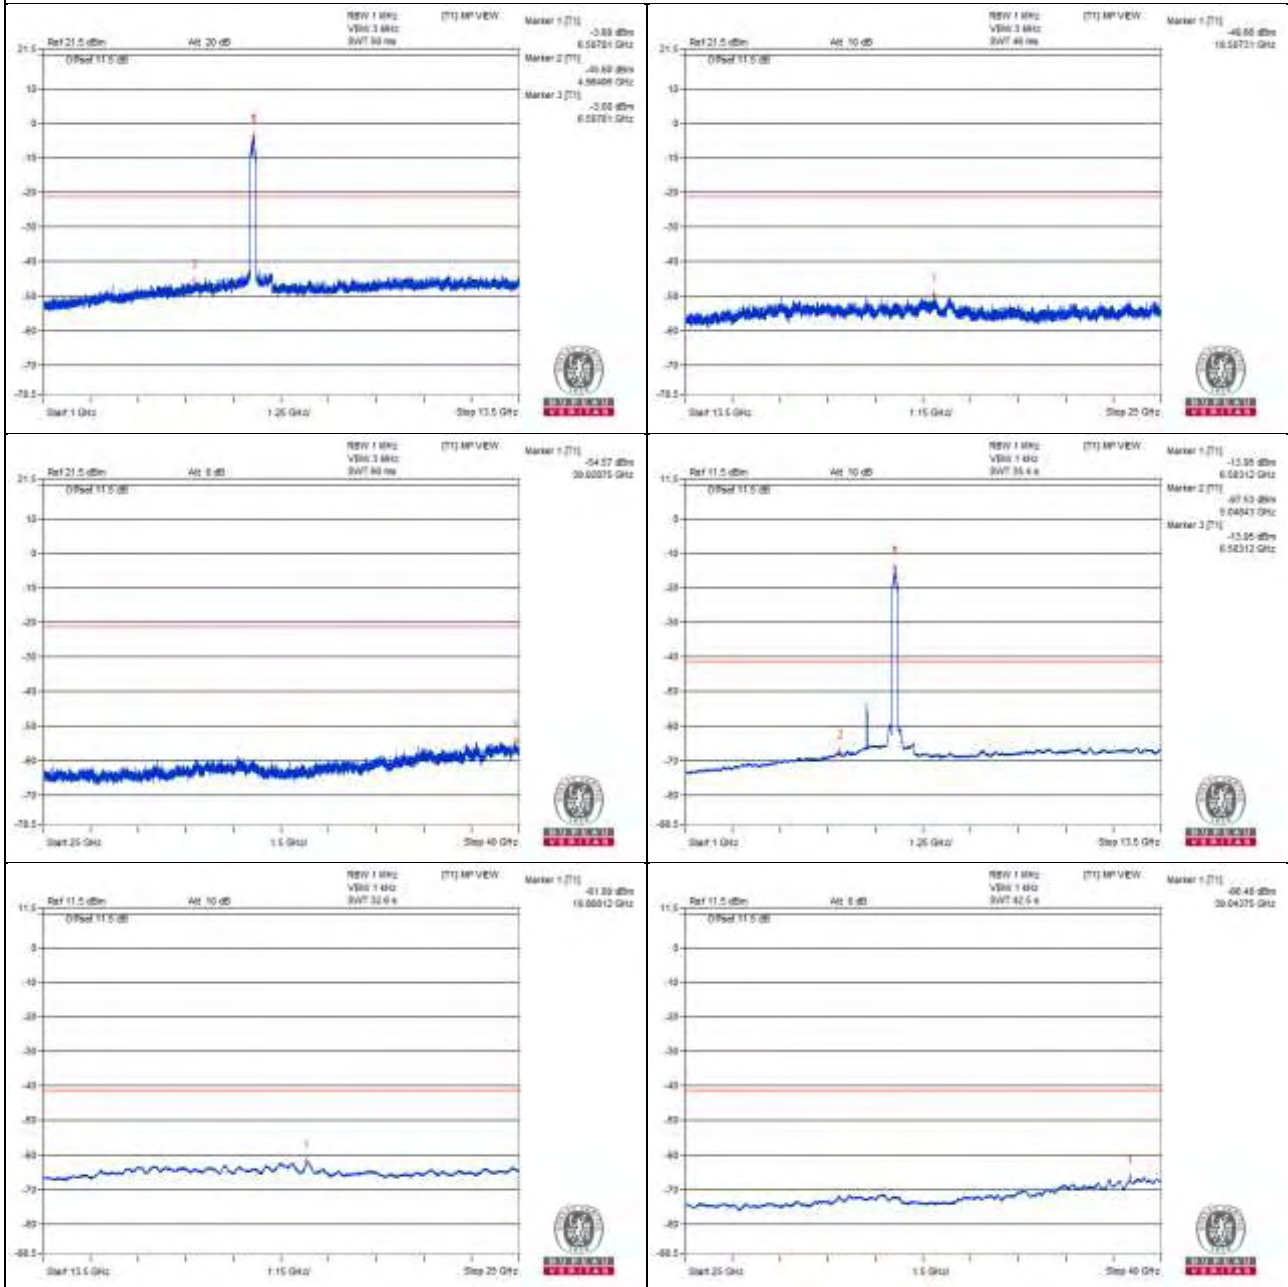

802.11ax (HE160) - Channel 143

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	13332.81 PK	60.29	74	-13.71	-45.82	-46.5	8.17	-34.97
2	13331.25 AV	38.92	54	-15.08	-67.61	-67.43	8.17	-56.34
3	19996.06 PK	52.9	74	-21.1	-53.79	-53.3	8.17	-42.36
4	19988.87 AV	42.51	54	-11.49	-64.03	-63.84	8.17	-52.75

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

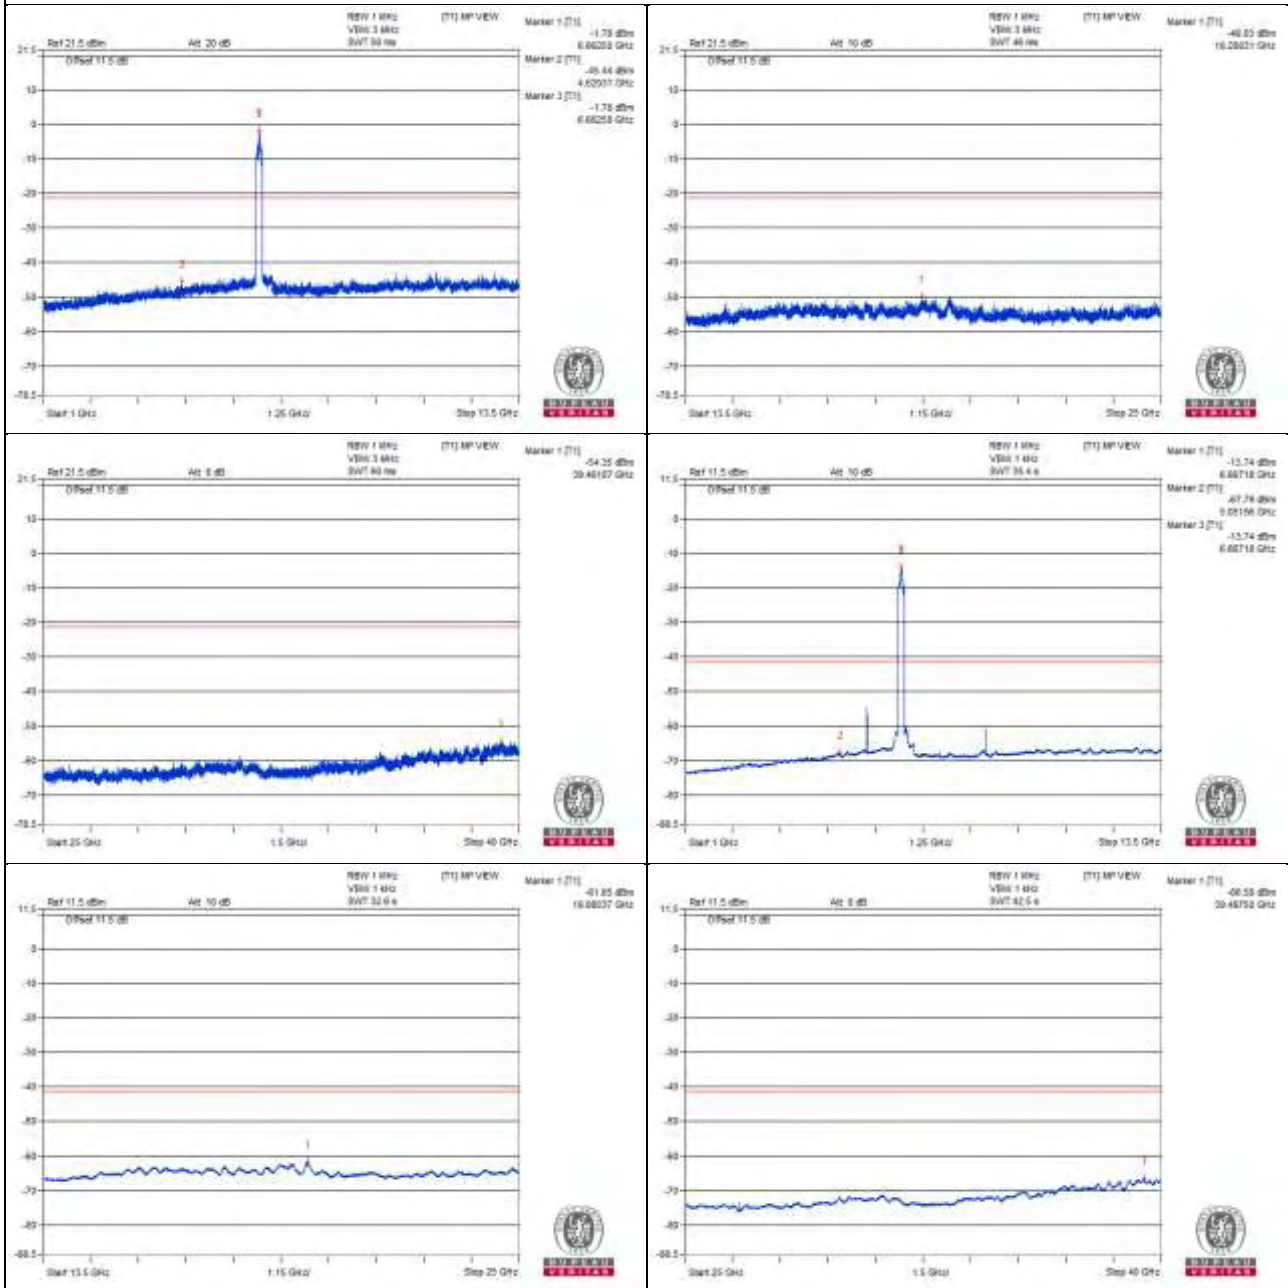

Chain 1

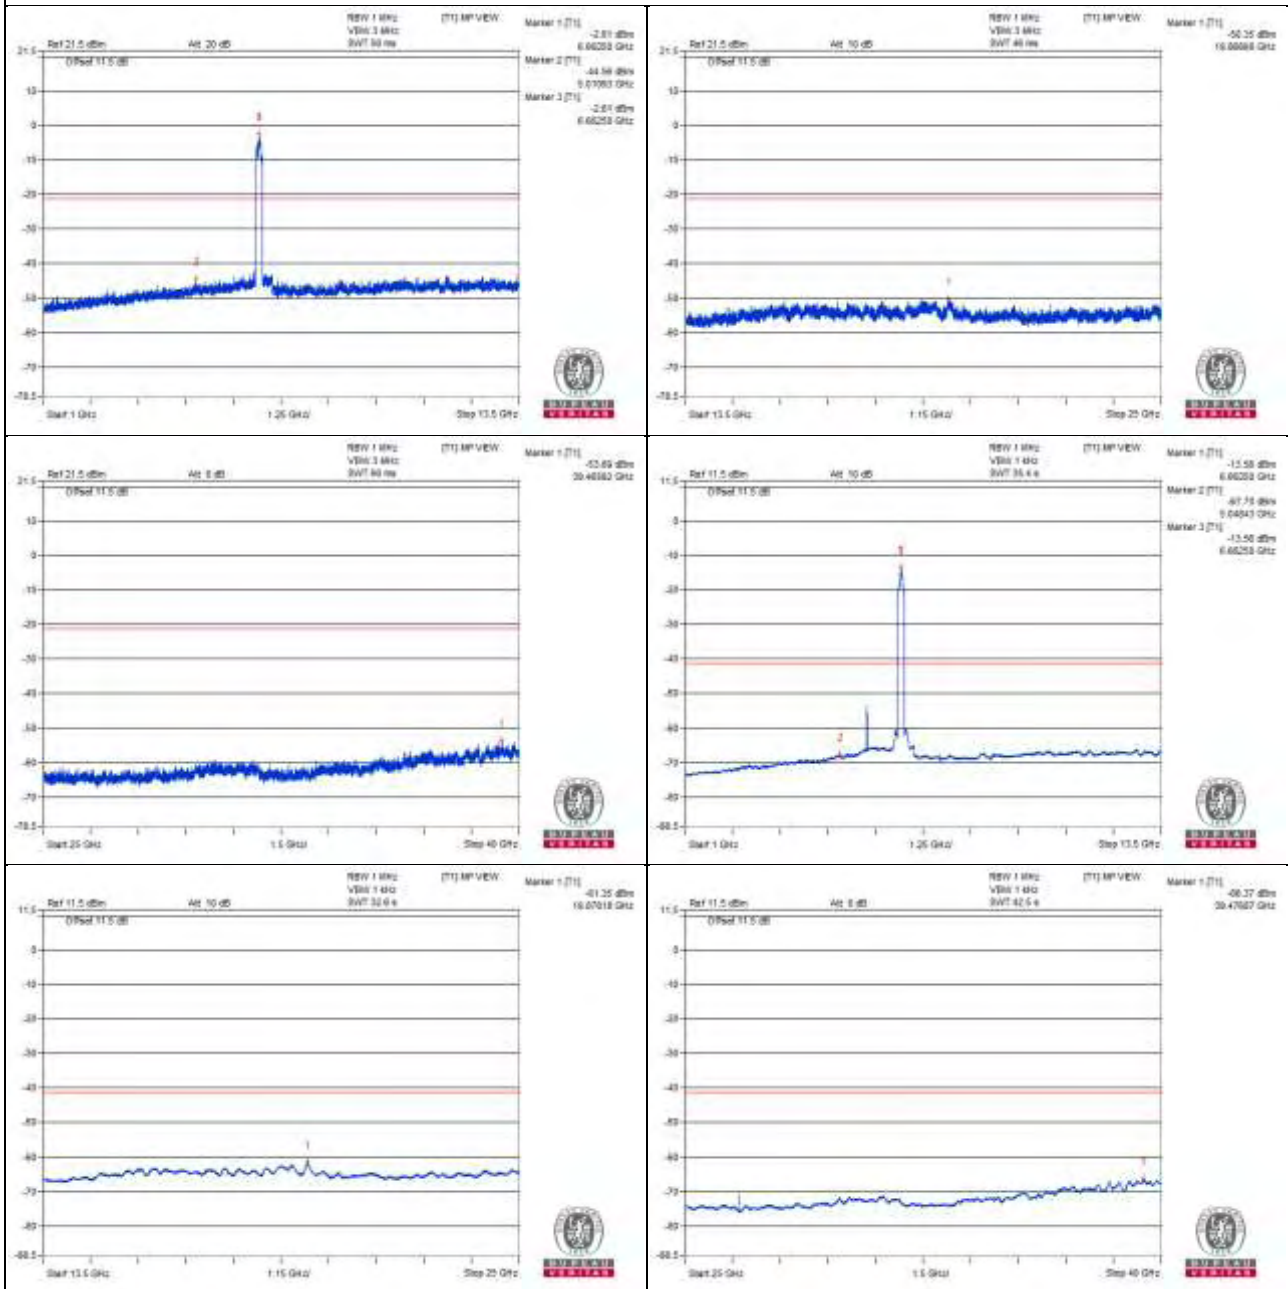

802.11ax (HE160) - Channel 175

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	13645.18 PK	50.63	88.2	-37.57	-54.61	-57.47	8.17	-44.63
2	13643.75 AV	39.81	68.2	-28.39	-66.65	-66.61	8.17	-55.45
3	20466.12 PK	51.48	74	-22.52	-55.28	-54.66	8.17	-43.78
4	20484.81 AV	40.69	54	-13.31	-65.71	-65.79	8.17	-54.57

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

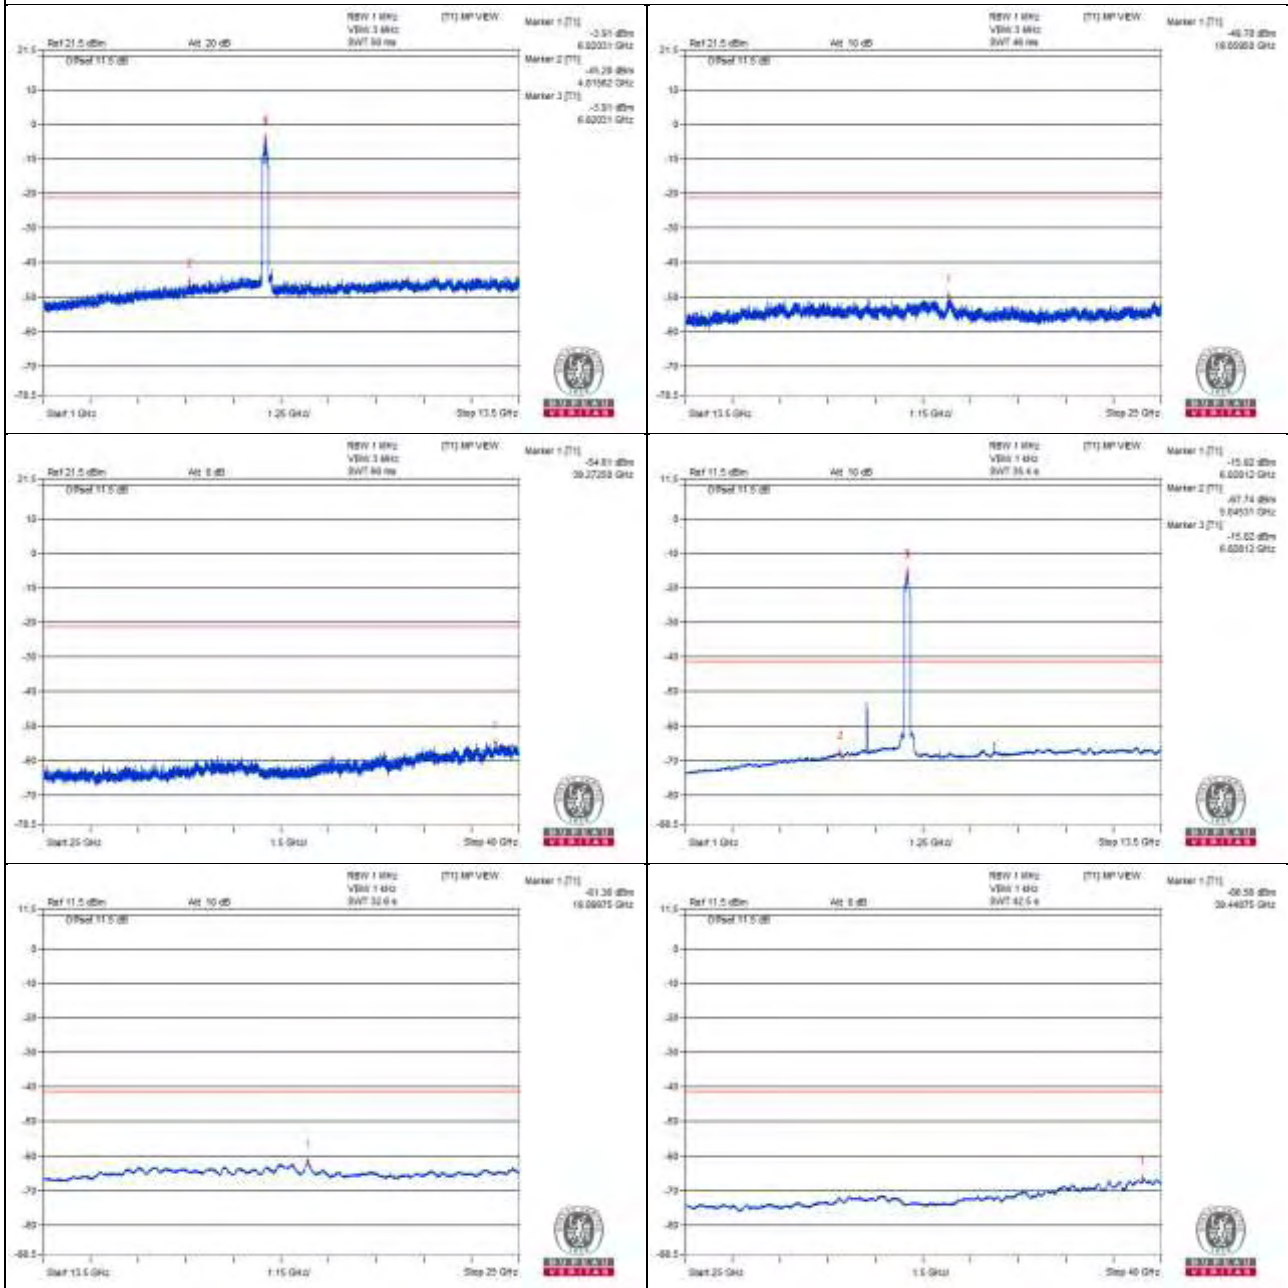

Chain 1

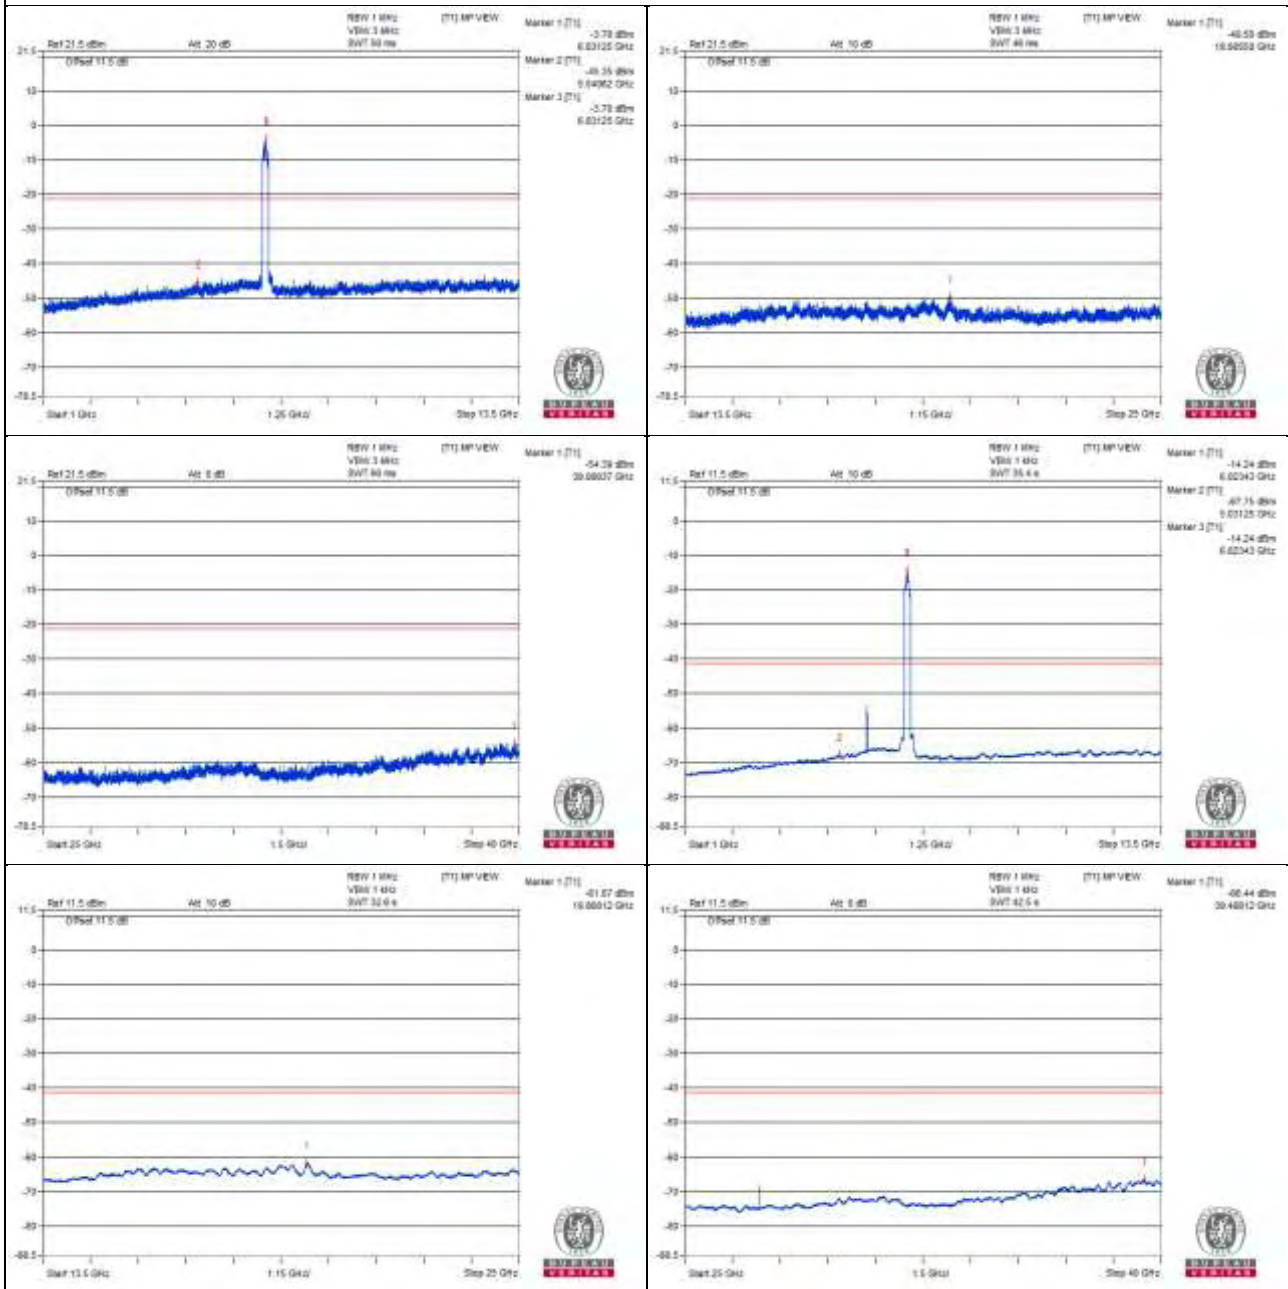

802.11ax (HE160) - Channel 207

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	13975.81 PK	51.57	88.2	-36.63	-53.57	-56.73	8.17	-43.69
2	13968.62 AV	39.79	68.2	-28.41	-67.1	-66.24	8.17	-55.47
3	20963.5 PK	52.06	74	-21.94	-55.67	-53.38	8.17	-43.2
4	20956.31 AV	41.03	54	-12.97	-65.46	-65.36	8.17	-54.23

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

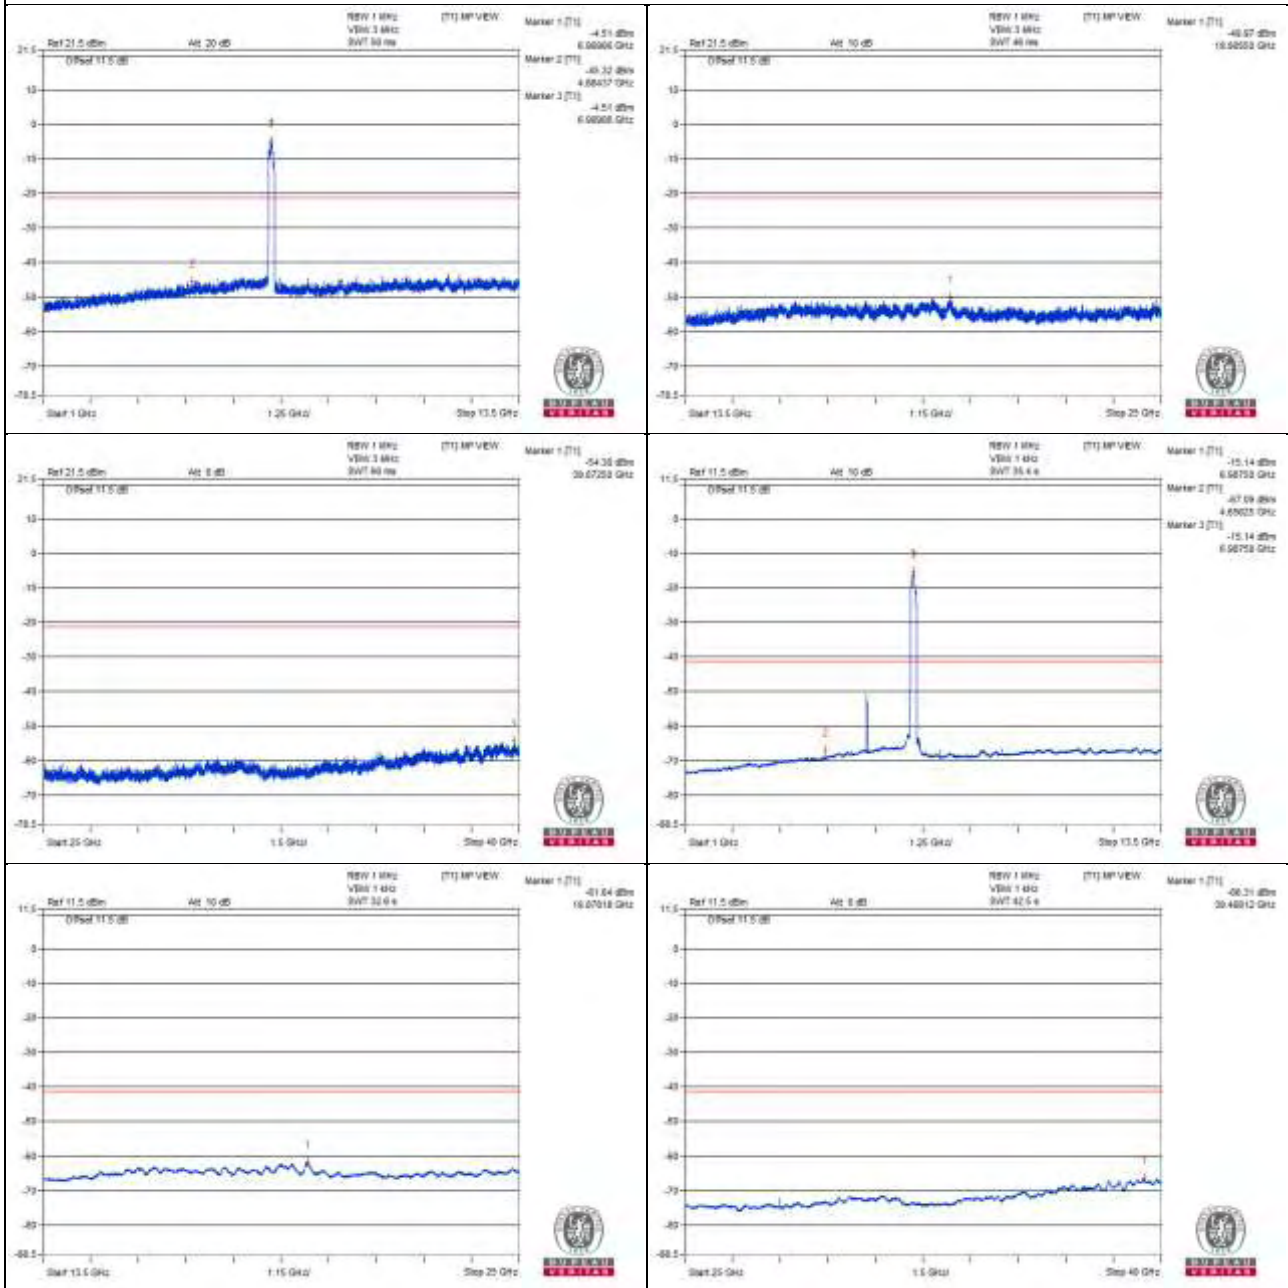

Chain 1

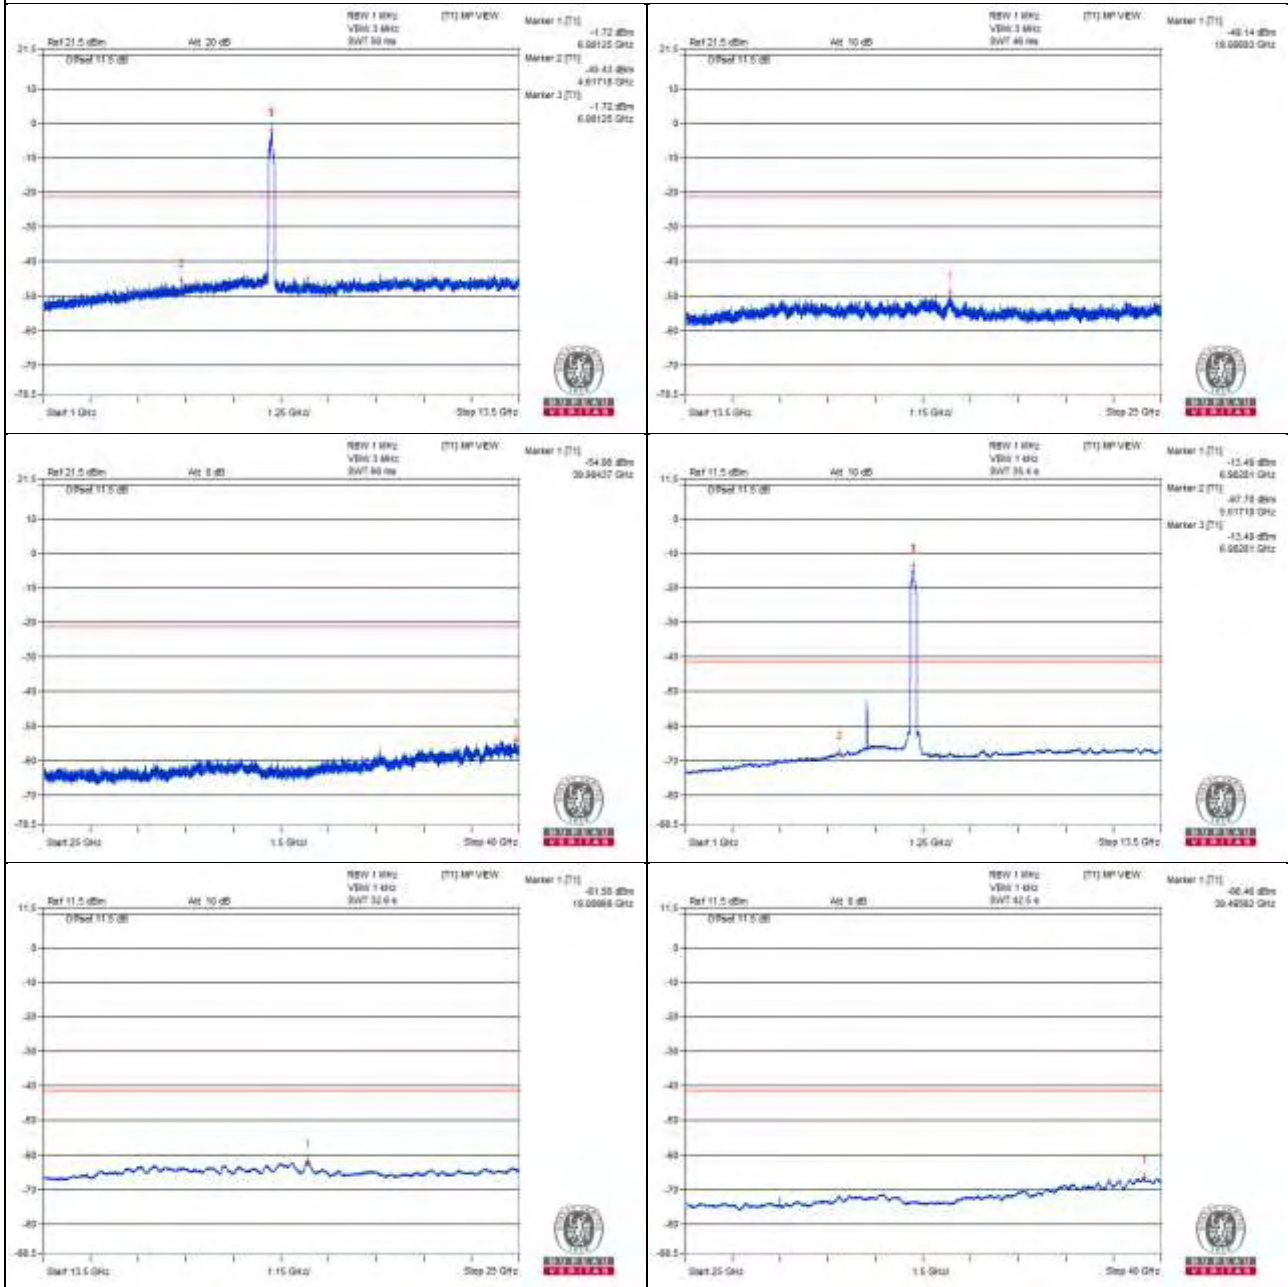

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	7137.27 PK	61.23	88.2	-26.97	-44.64	-45.77	8.13	-34.03
2	7126.92 AV	48.04	68.2	-20.16	-58.6	-58.14	8.13	-47.22

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

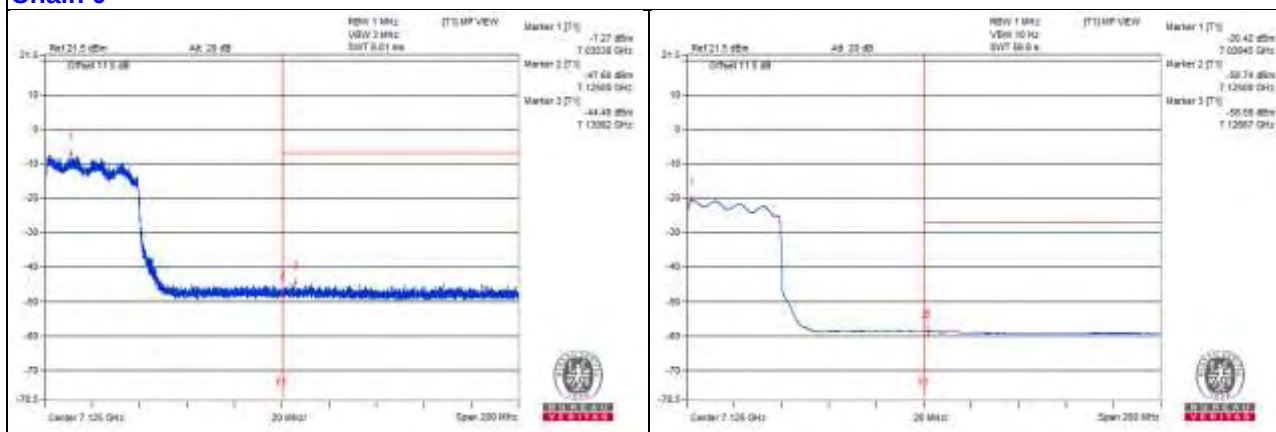

Chain 1

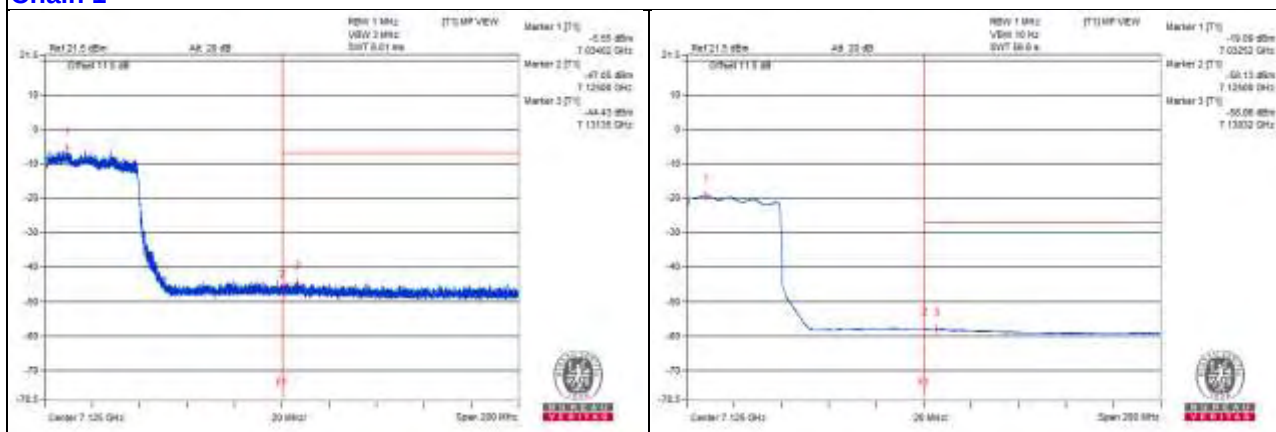

20MHz Preamble

RU26

Channel 2

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3964.06 PK	58.05	74	-15.95	-48	-48.82	8.17	-37.21
2	3975 AV	36.44	54	-17.56	-70.09	-69.92	8.17	-58.82
3	7915.62 PK	59.71	88.2	-28.49	-46.07	-47.5	8.17	-35.55
4	7912.5 AV	40.59	68.2	-27.61	-65.34	-66.43	8.17	-54.67
5	11850 PK	60.1	74	-13.9	-46.42	-46.26	8.17	-35.16
6	11851.56 AV	38.26	54	-15.74	-68.25	-68.11	8.17	-57
7	17824 PK	52.82	74	-21.18	-53.73	-53.52	8.17	-42.44

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

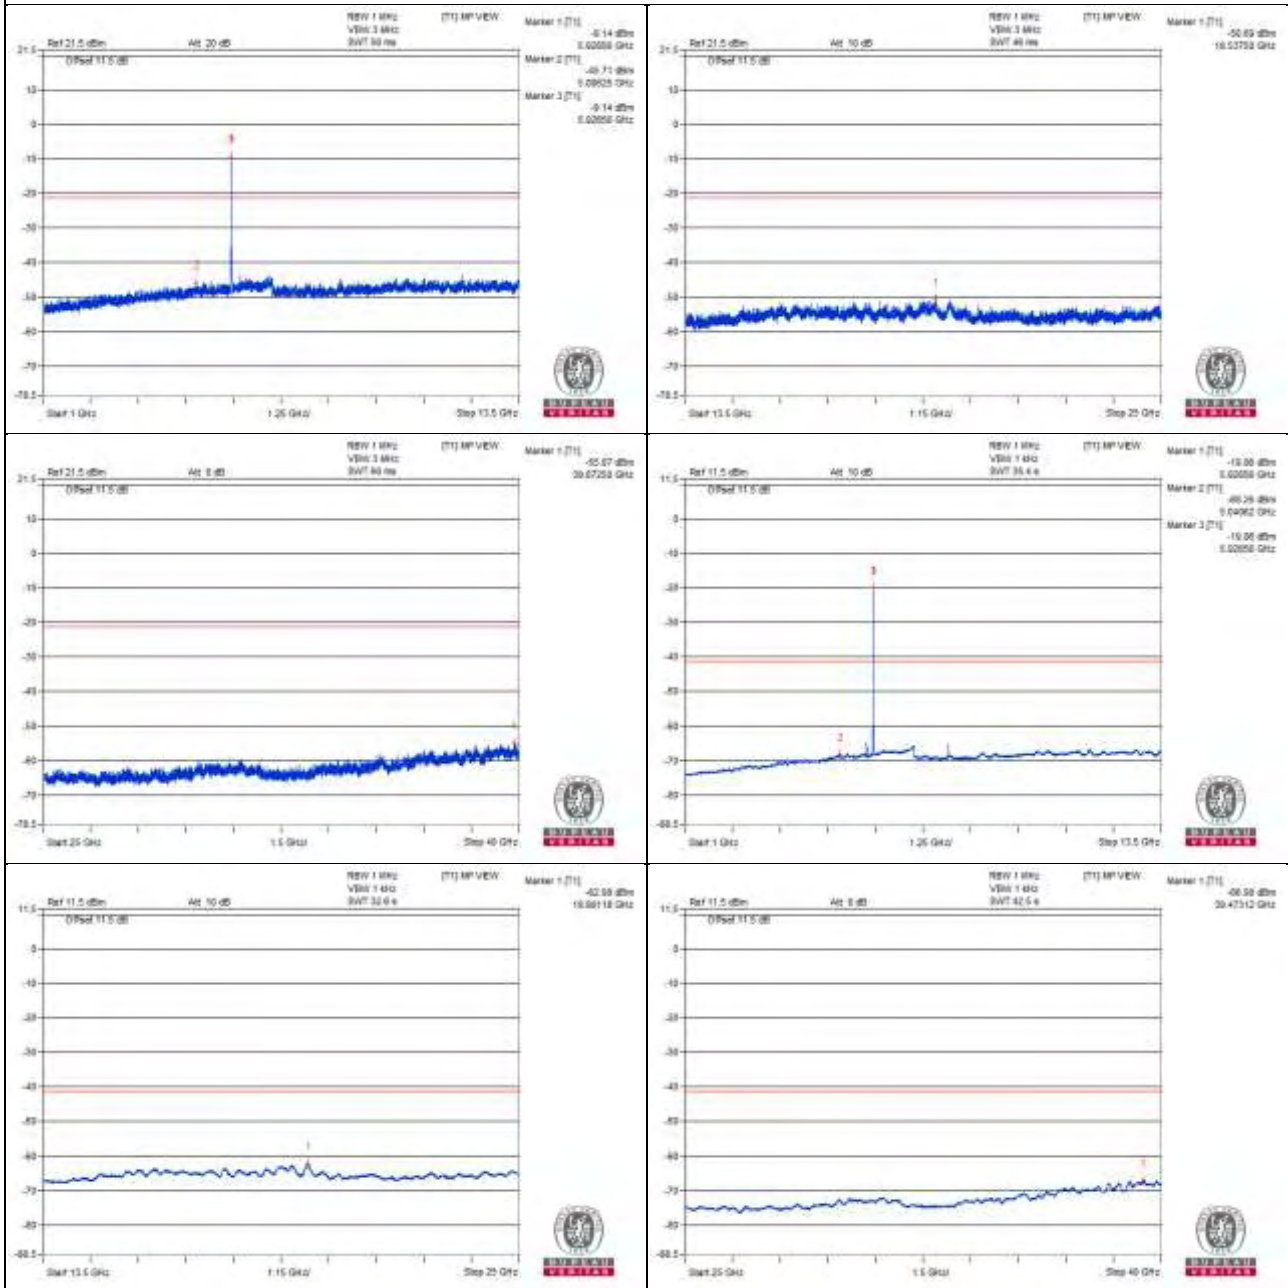

Chain 1

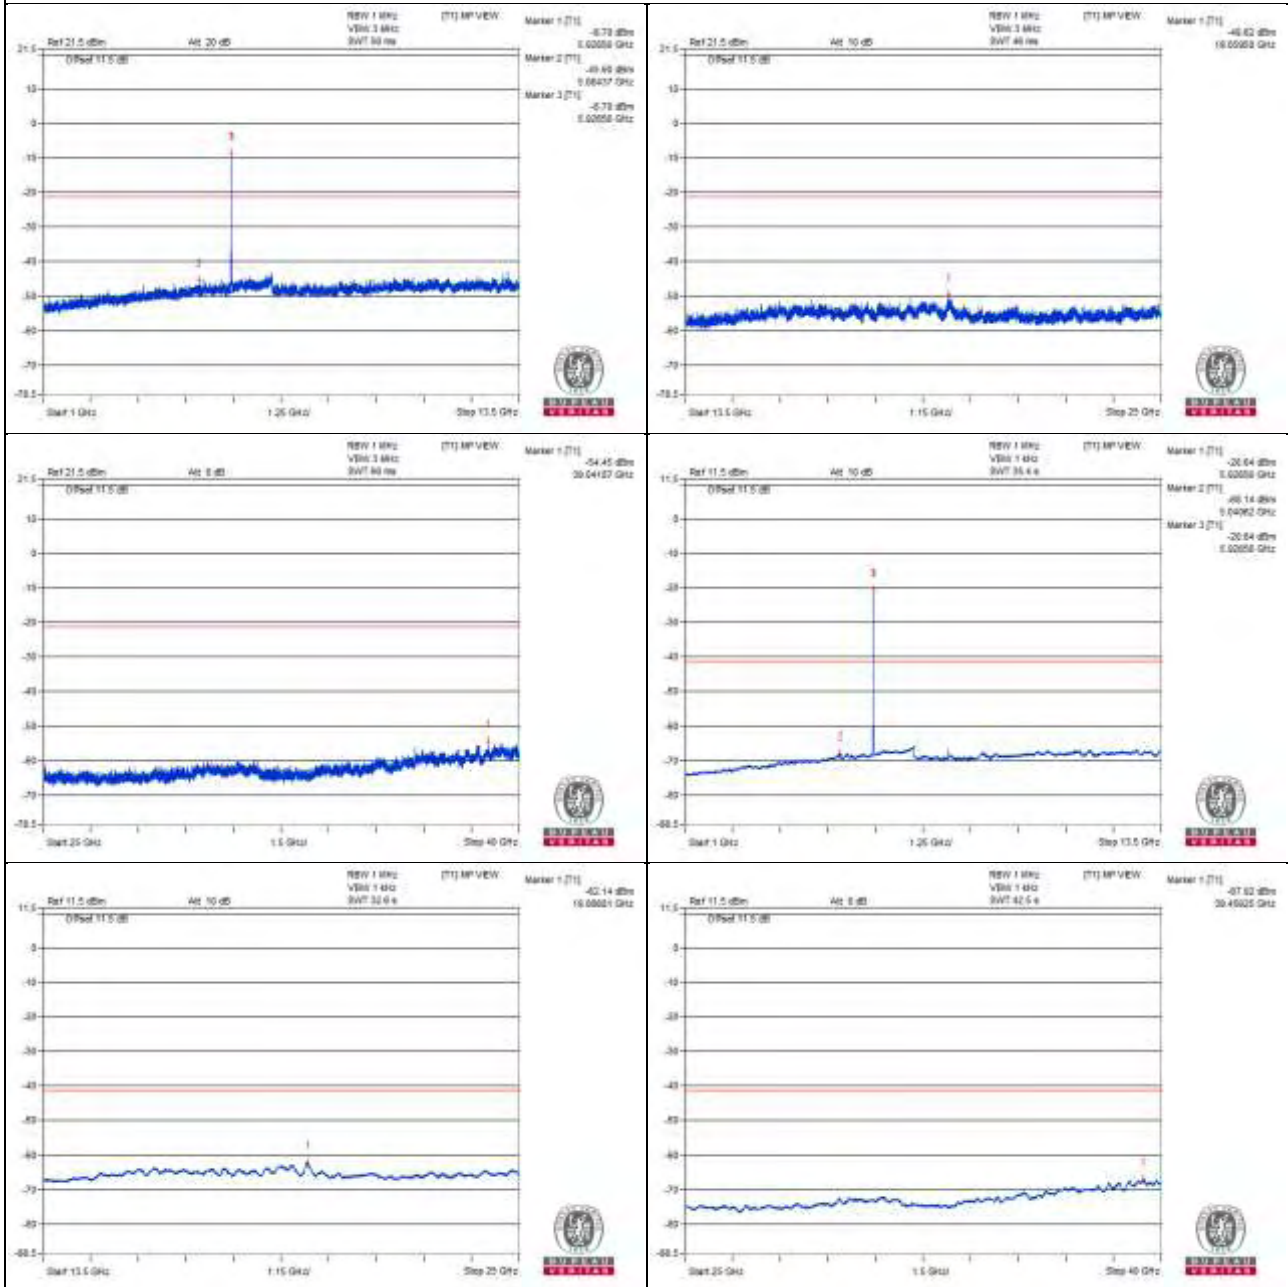

Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5925 PK	85.23	88.2	-2.97	-20.81	-21.6	8.15	-10.03
2	5925 AV	73.01	68.2	* 4.81	-33.06	-33.8	8.15	-22.25

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.


* The unwanted emission was verified and the test result was passed by radiated measurement.

(Please refer APPENDIX B)

Chain 0

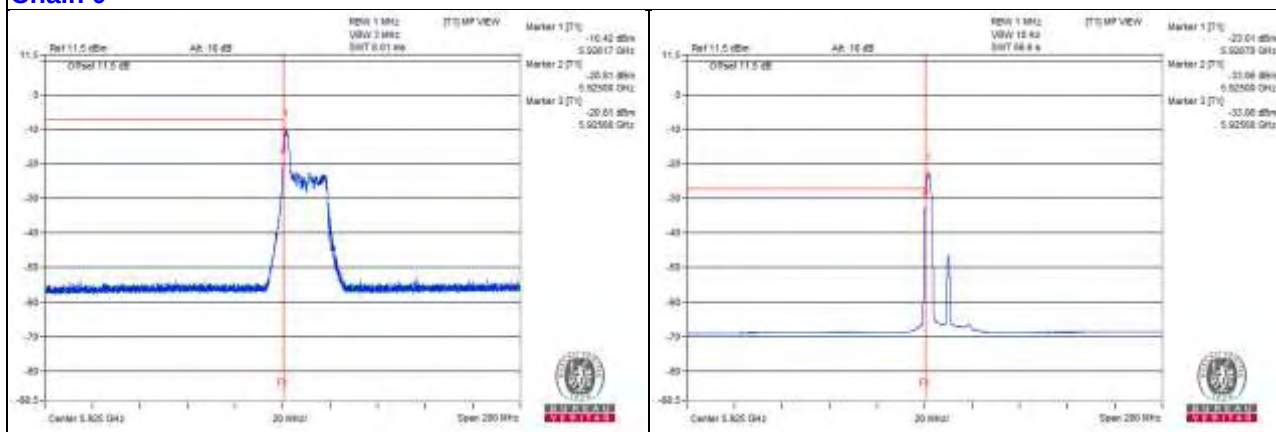

Chain 1

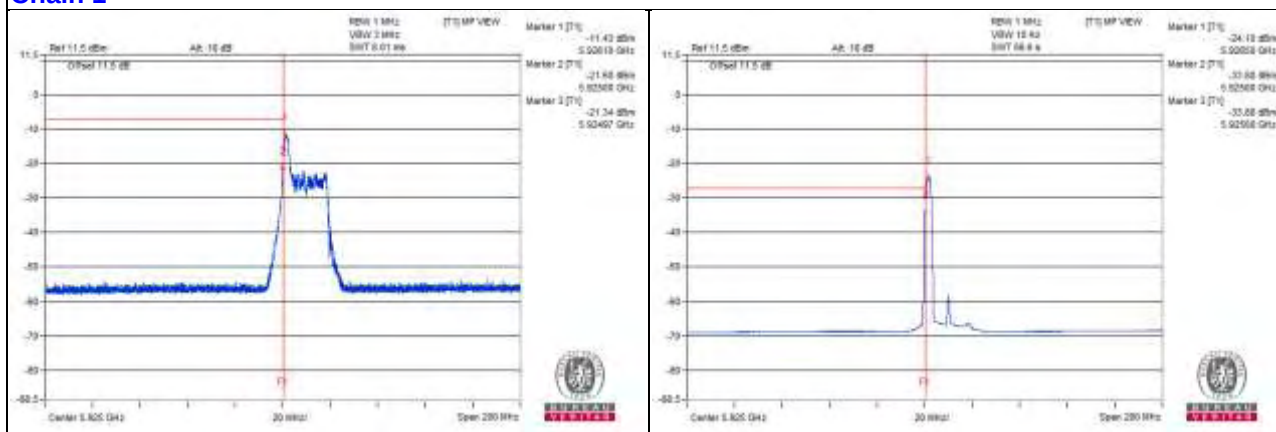

Channel 1

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3987.5 PK	57.83	74	-16.17	-49.48	-47.89	8.17	-37.43
2	3981.25 AV	36.38	54	-17.62	-70.07	-70.06	8.17	-58.88
3	7957.81 PK	59.62	88.2	-28.58	-46.12	-47.66	8.17	-35.64
4	7940.62 AV	43.61	68.2	-24.59	-63.99	-61.92	8.17	-51.65
5	11918.75 PK	59.82	74	-14.18	-47.79	-45.7	8.17	-35.44
6	11892.18 AV	38.56	54	-15.44	-67.84	-67.93	8.17	-56.7
7	17851.31 PK	53.73	74	-20.27	-52.16	-53.34	8.17	-41.53

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

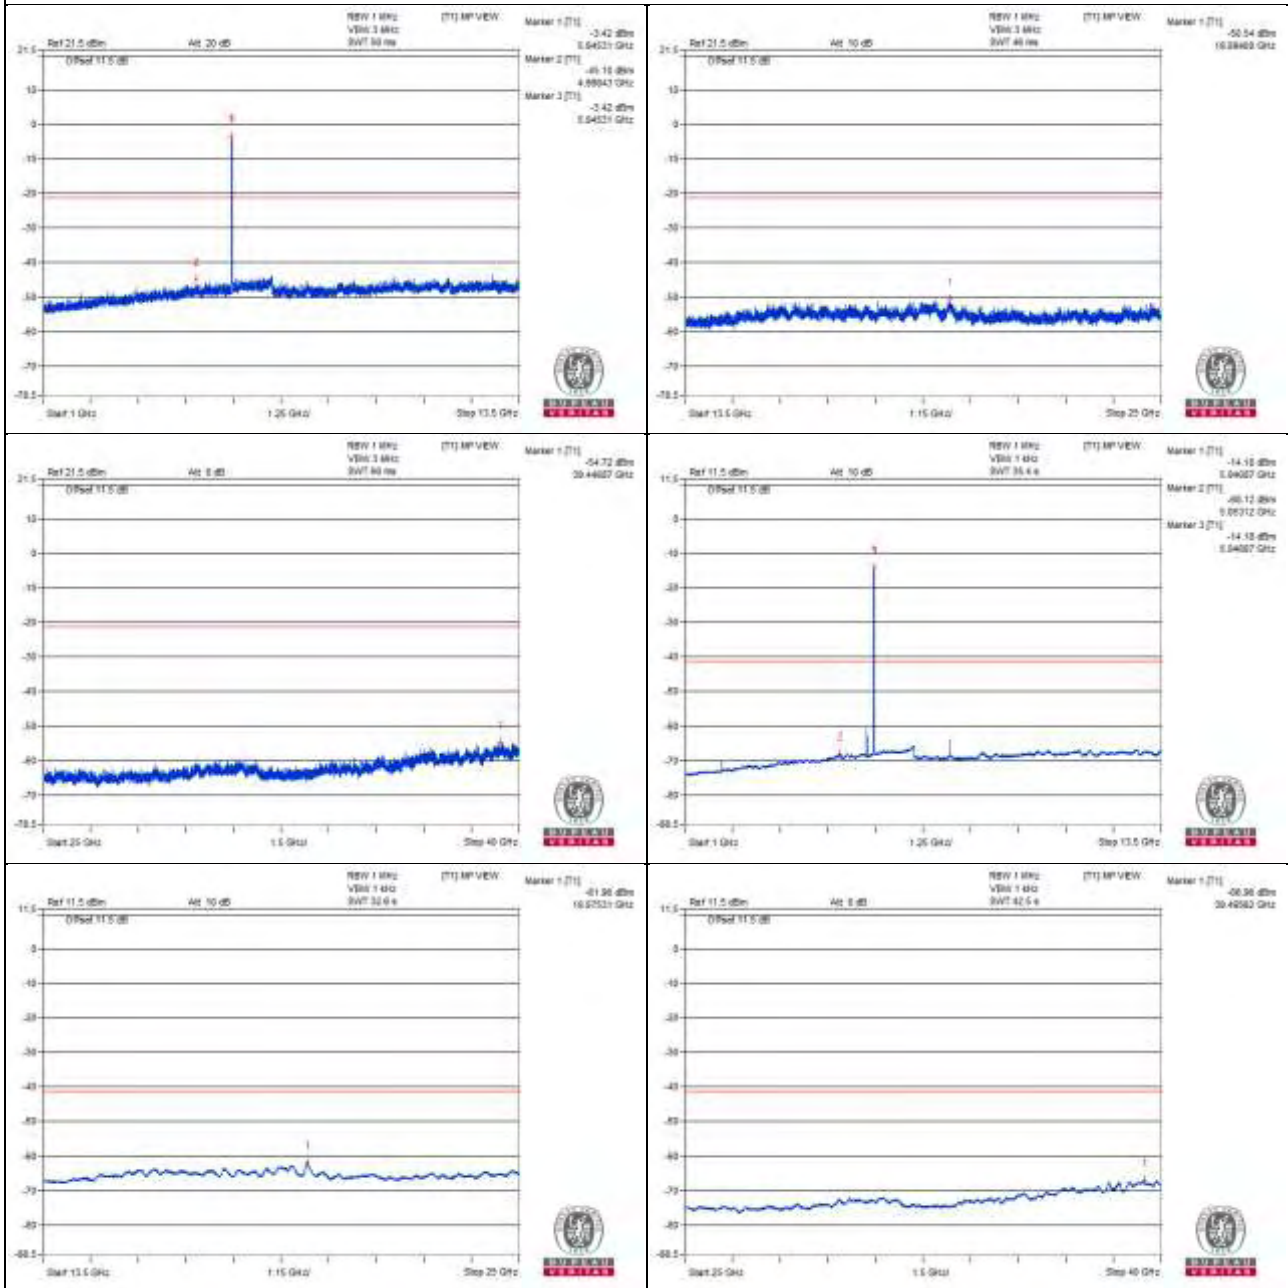

Chain 1

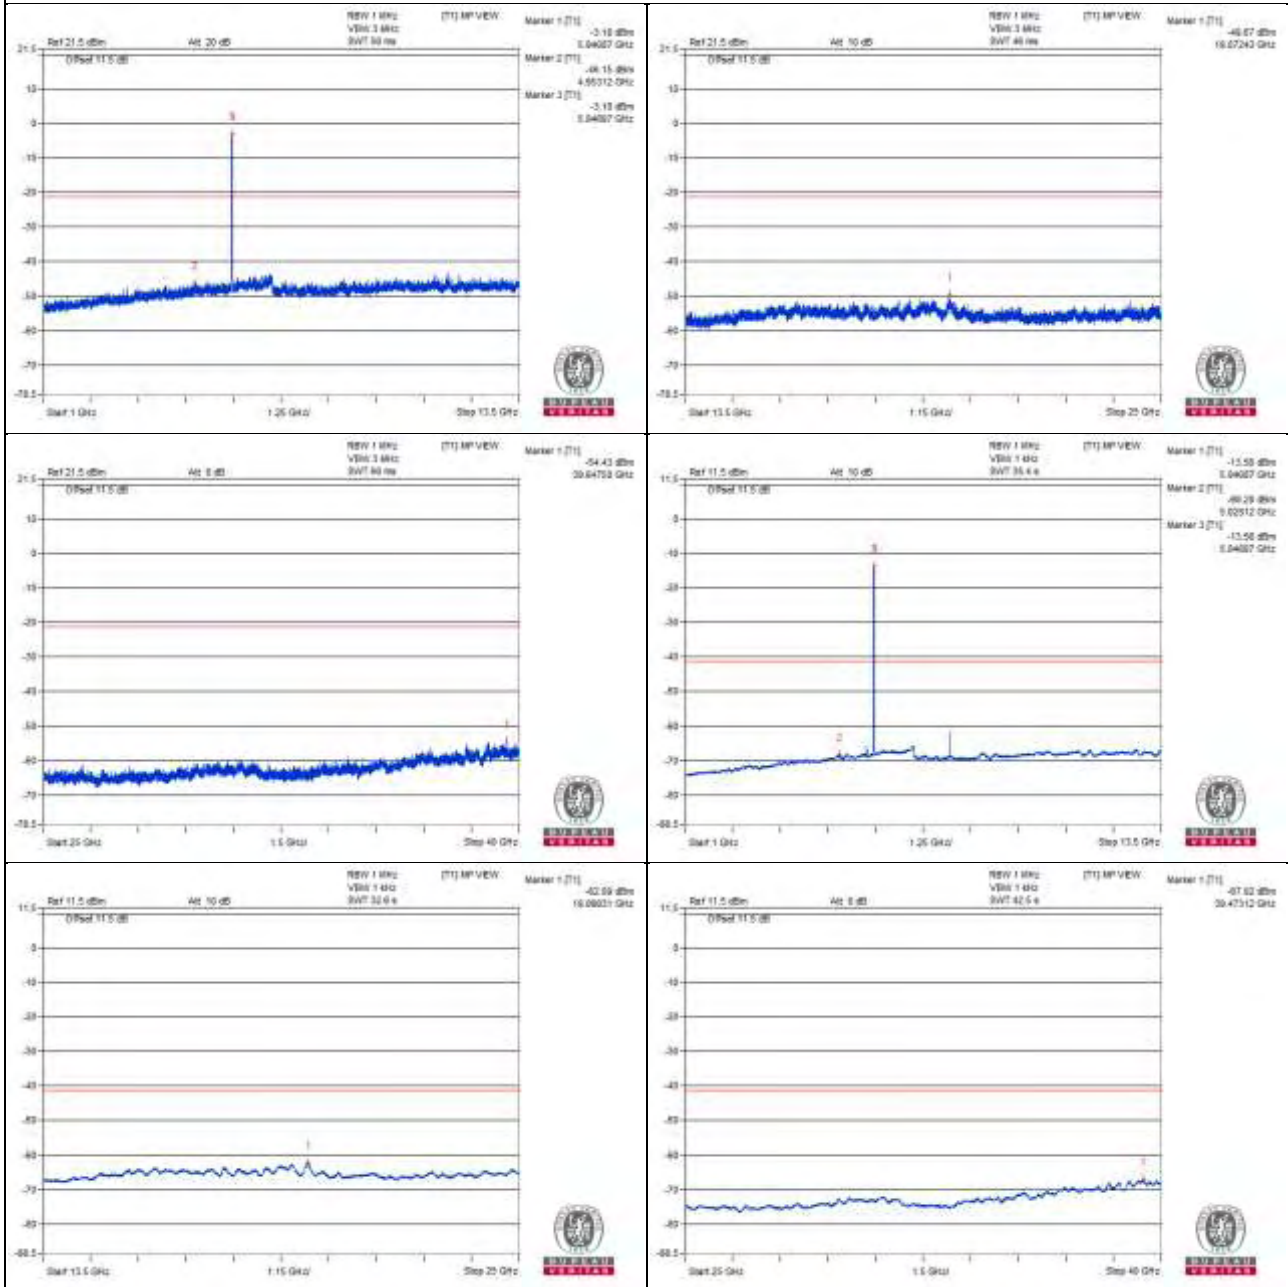

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5925 PK	85.23	88.2	-2.97	-20.81	-21.6	8.15	-10.03
2	5925 AV	73.01	68.2	* 4.81	-33.06	-33.8	8.15	-22.25

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

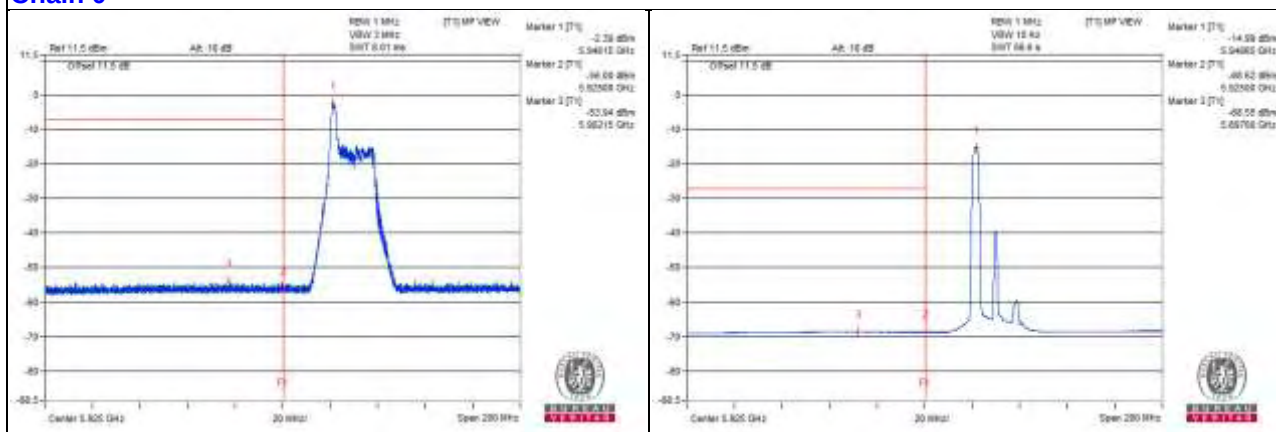

Chain 1

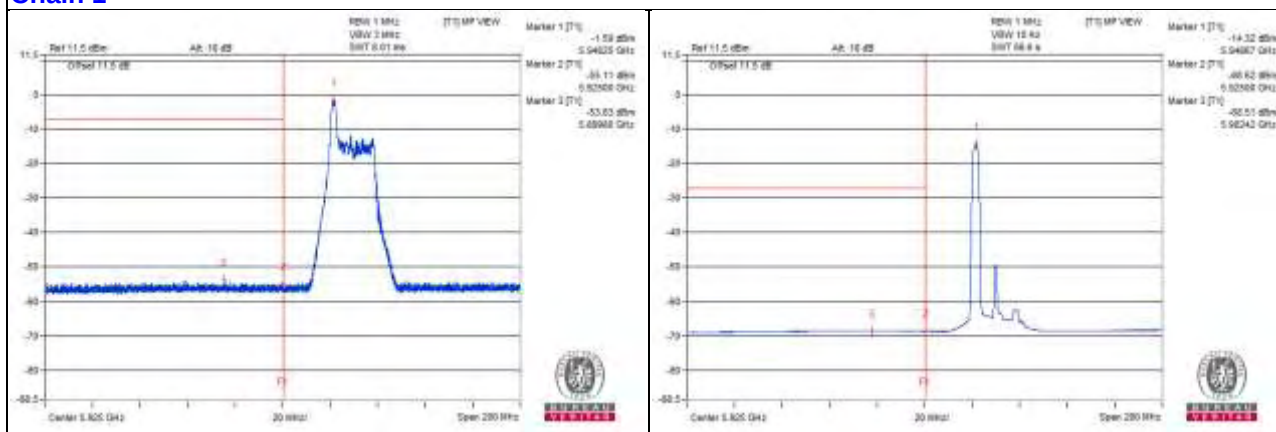

Channel 45

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	4110.93 PK	58.17	74	-15.83	-49.61	-47.25	8.17	-37.09
2	4115.62 AV	36.44	54	-17.56	-69.93	-70.08	8.17	-58.82
3	8232.81 PK	58.71	74	-15.29	-48.29	-47.23	8.17	-36.55
4	8232.81 AV	43.52	54	-10.48	-61.83	-64.38	8.17	-51.74
5	12346.87 PK	60.89	74	-13.11	-44.39	-47.13	8.17	-34.37
6	12365.62 AV	38.89	54	-15.11	-67.55	-67.55	8.17	-56.37
7	18516.87 PK	52.58	74	-21.42	-53.98	-53.74	8.17	-42.68
8	18537 AV	41.86	54	-12.14	-64.51	-64.65	8.17	-53.4

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

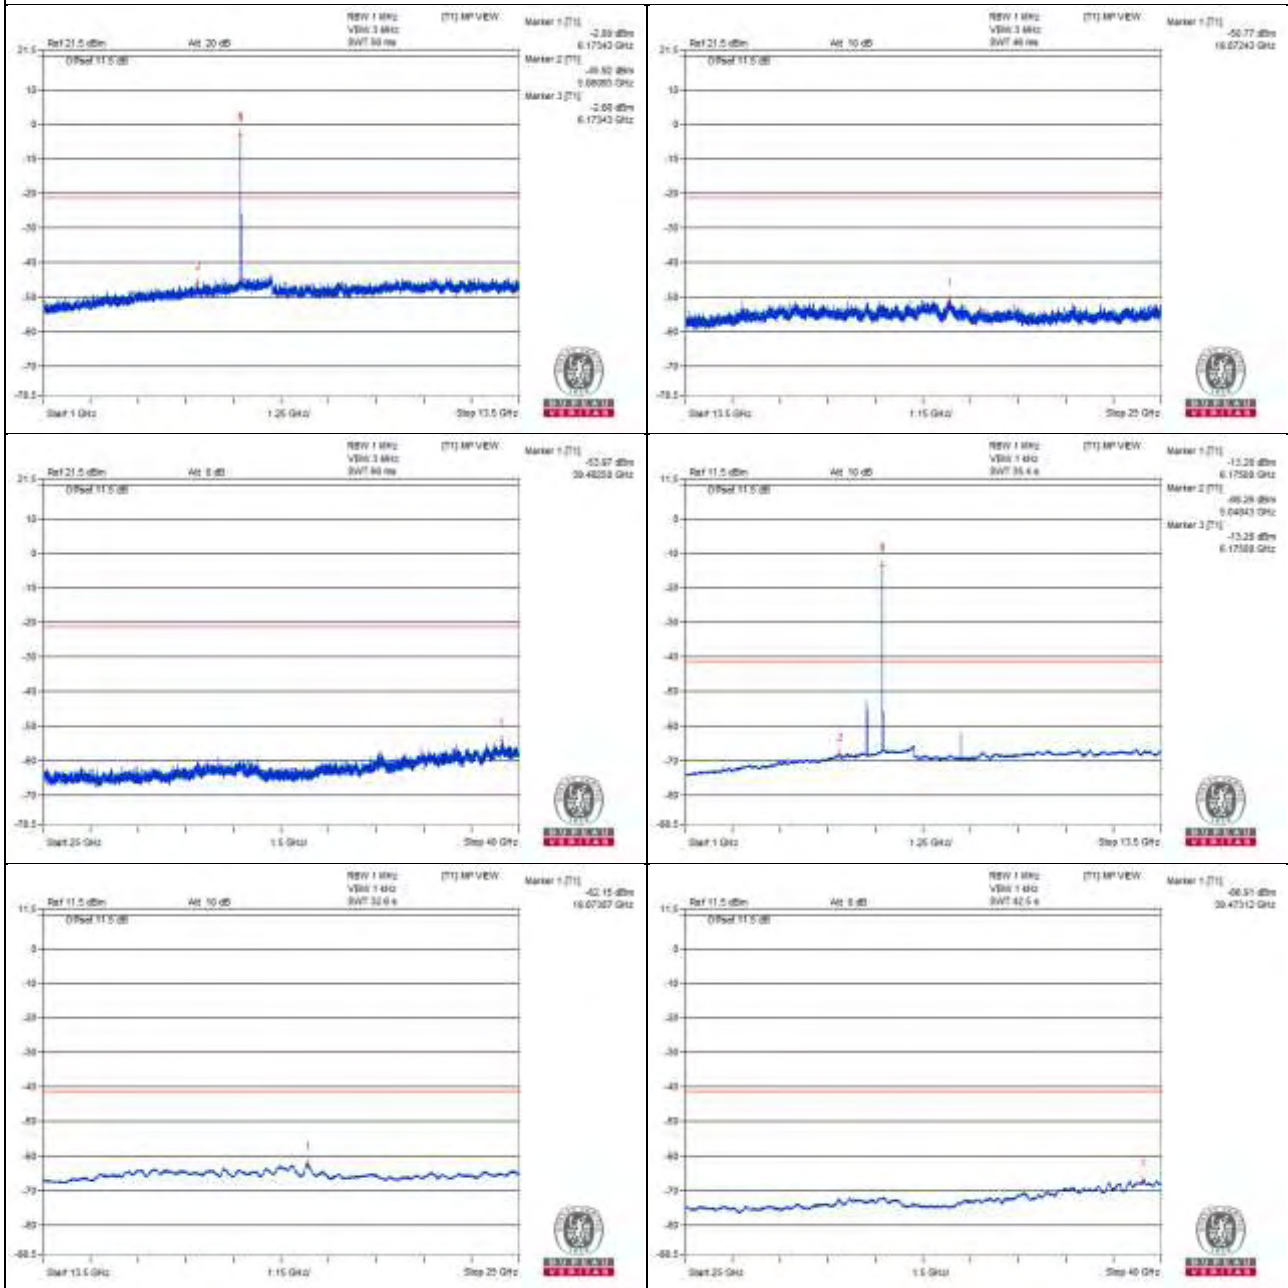

Chain 1

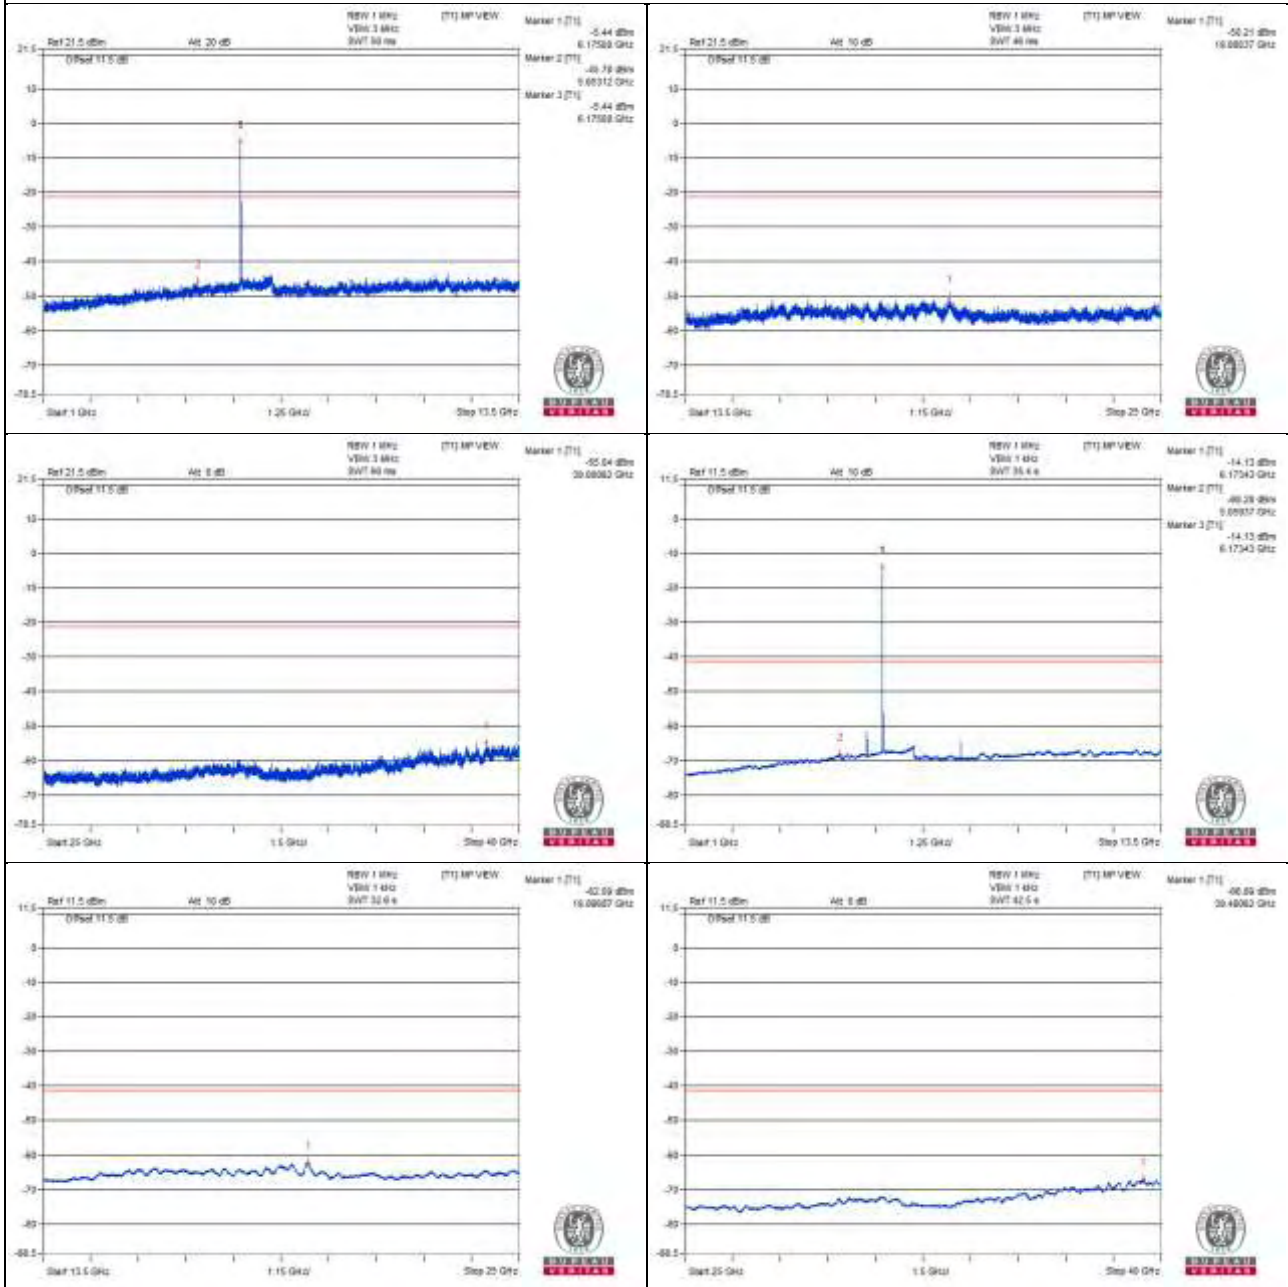

Channel 93

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	4292.18 PK	58.21	74	-15.79	-48.84	-47.69	8.17	-37.05
2	4285.93 AV	36.33	54	-17.67	-70.19	-70.03	8.17	-58.93
3	8554.68 PK	59.07	88.2	-29.13	-46.56	-48.37	8.17	-36.19
4	8553.12 AV	43.42	68.2	-24.78	-60.84	-67.59	8.17	-51.84
5	12850 PK	60.5	88.2	-27.7	-46.37	-45.55	8.17	-34.76
6	12848.43 AV	39.33	68.2	-28.87	-67.07	-67.16	8.17	-55.93
7	19229.87 PK	54.05	74	-19.95	-51.5	-53.52	8.17	-41.21
8	19255.75 AV	43.39	54	-10.61	-63.4	-62.73	8.17	-51.87

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

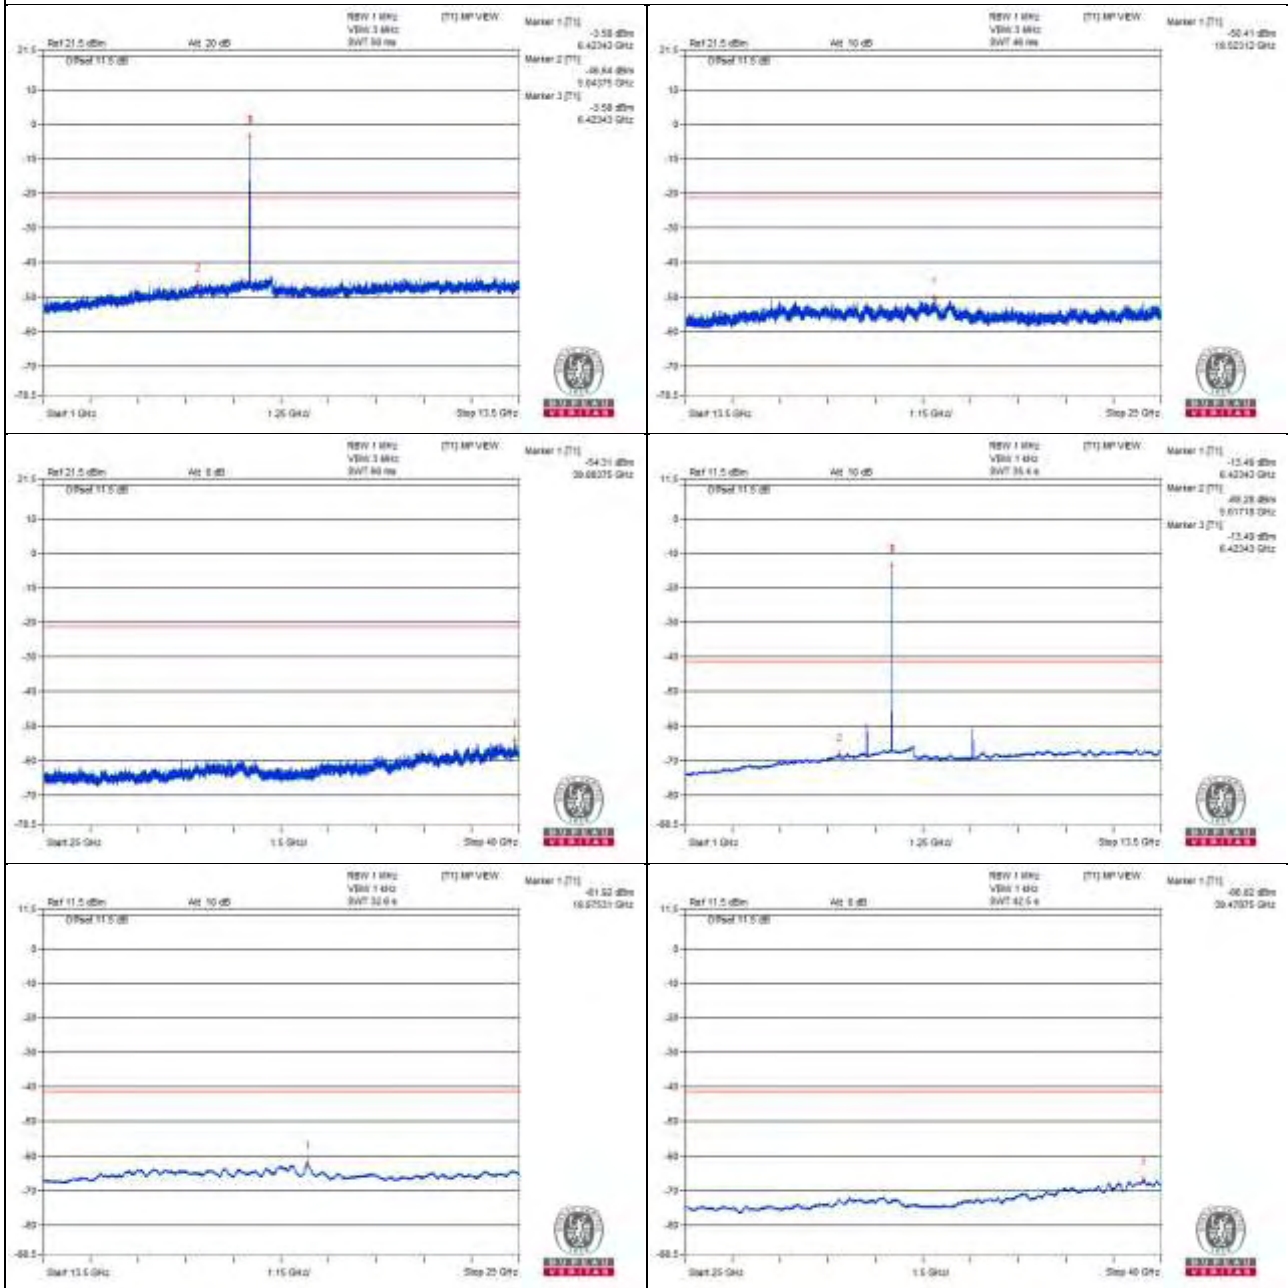

Chain 1

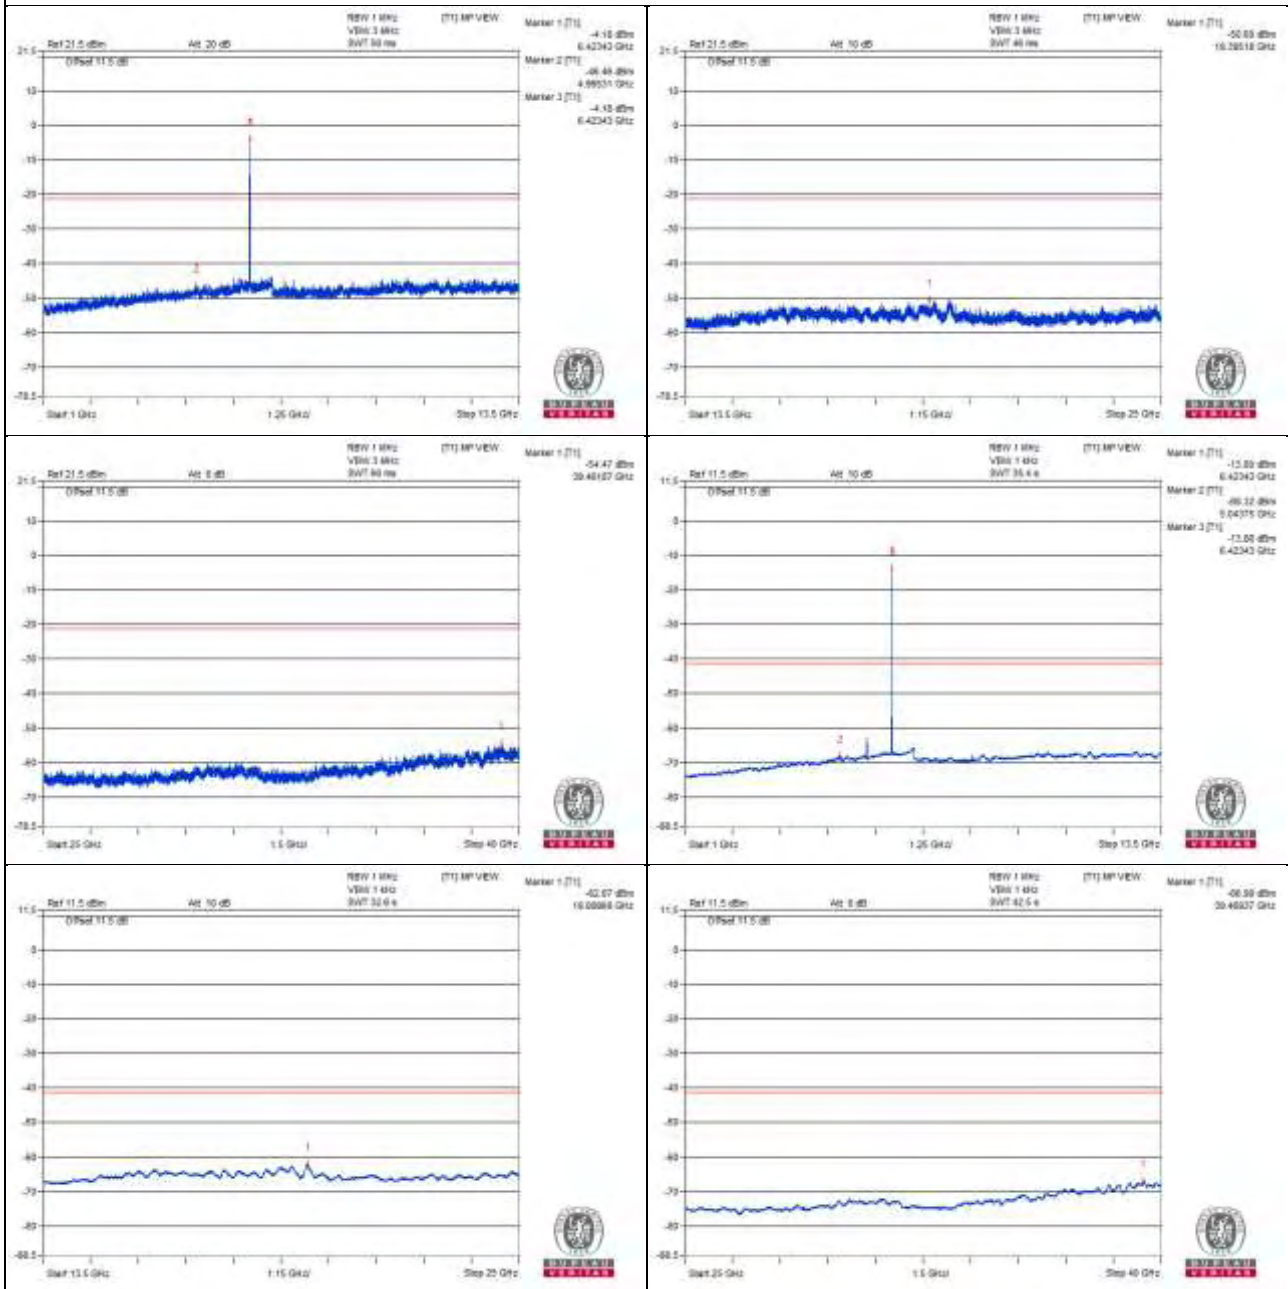

Channel 97

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	4300 PK	58.5	74	-15.5	-47.24	-48.78	8.17	-36.76
2	4309.37 AV	36.44	54	-17.56	-69.98	-70.02	8.17	-58.82
3	8565.62 PK	58.25	88.2	-29.95	-48.36	-48.02	8.17	-37.01
4	8579.68 AV	43.96	68.2	-24.24	-60.21	-67.53	8.17	-51.3
5	12881.25 PK	61.18	88.2	-27.02	-44.68	-45.92	8.17	-34.08
6	12870.31 AV	39.53	68.2	-28.67	-66.67	-67.17	8.17	-55.73
7	19288.81 PK	54.3	74	-19.7	-53.34	-51.2	8.17	-40.96

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

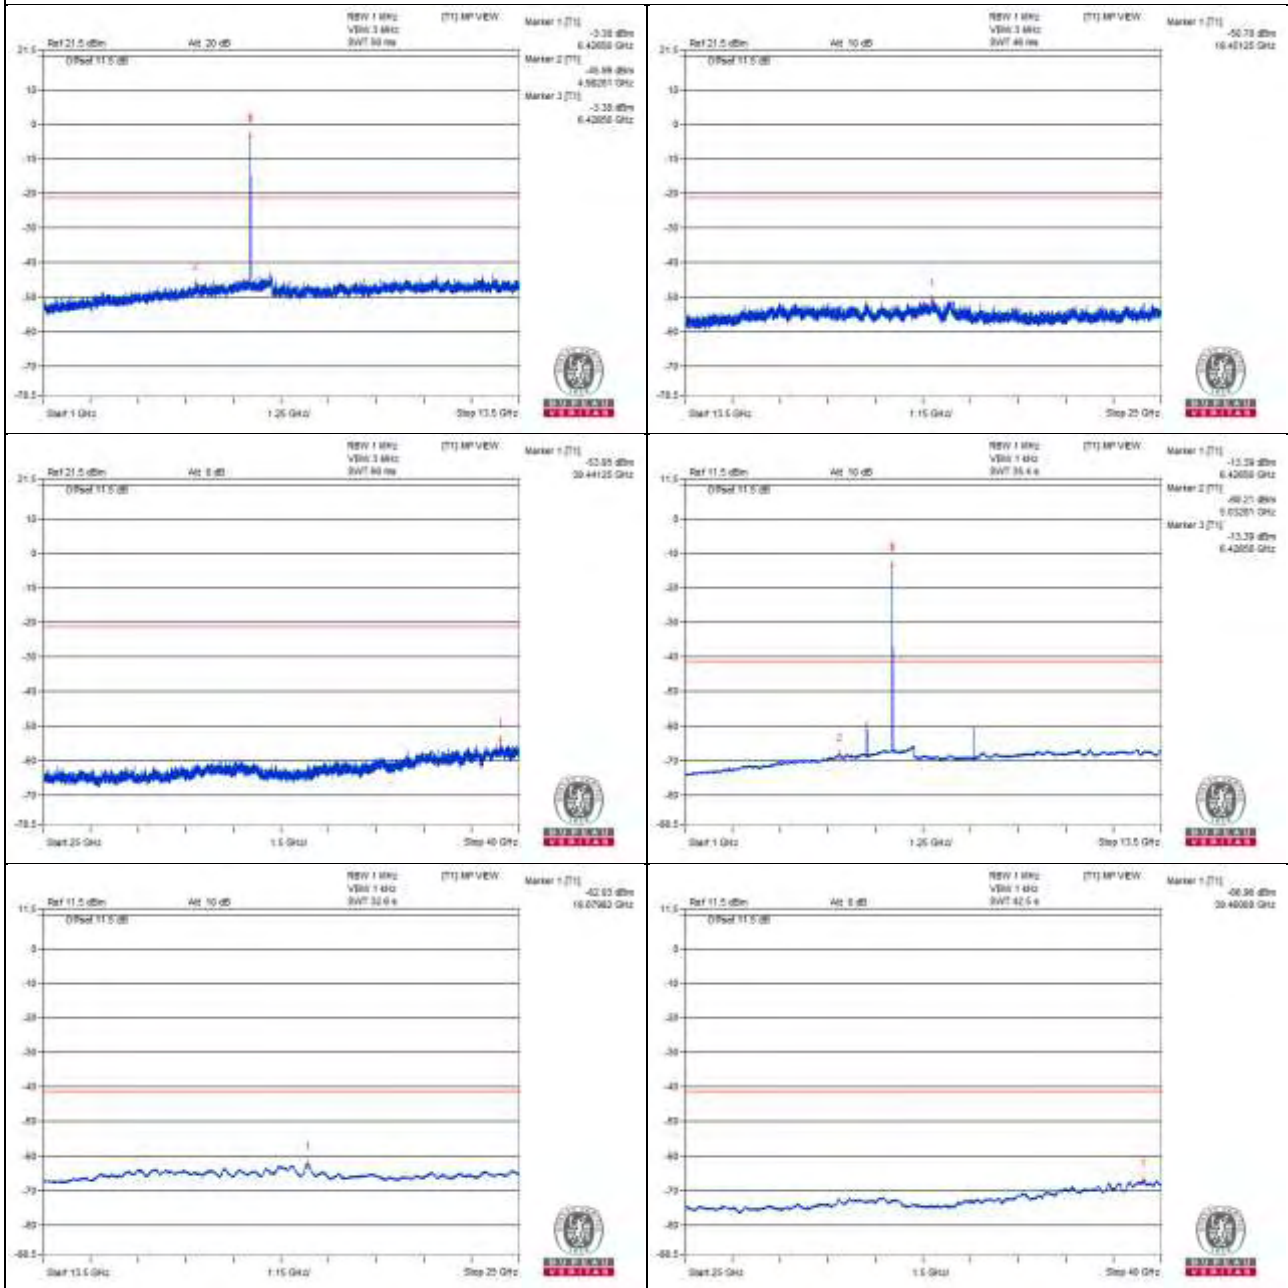

Chain 1

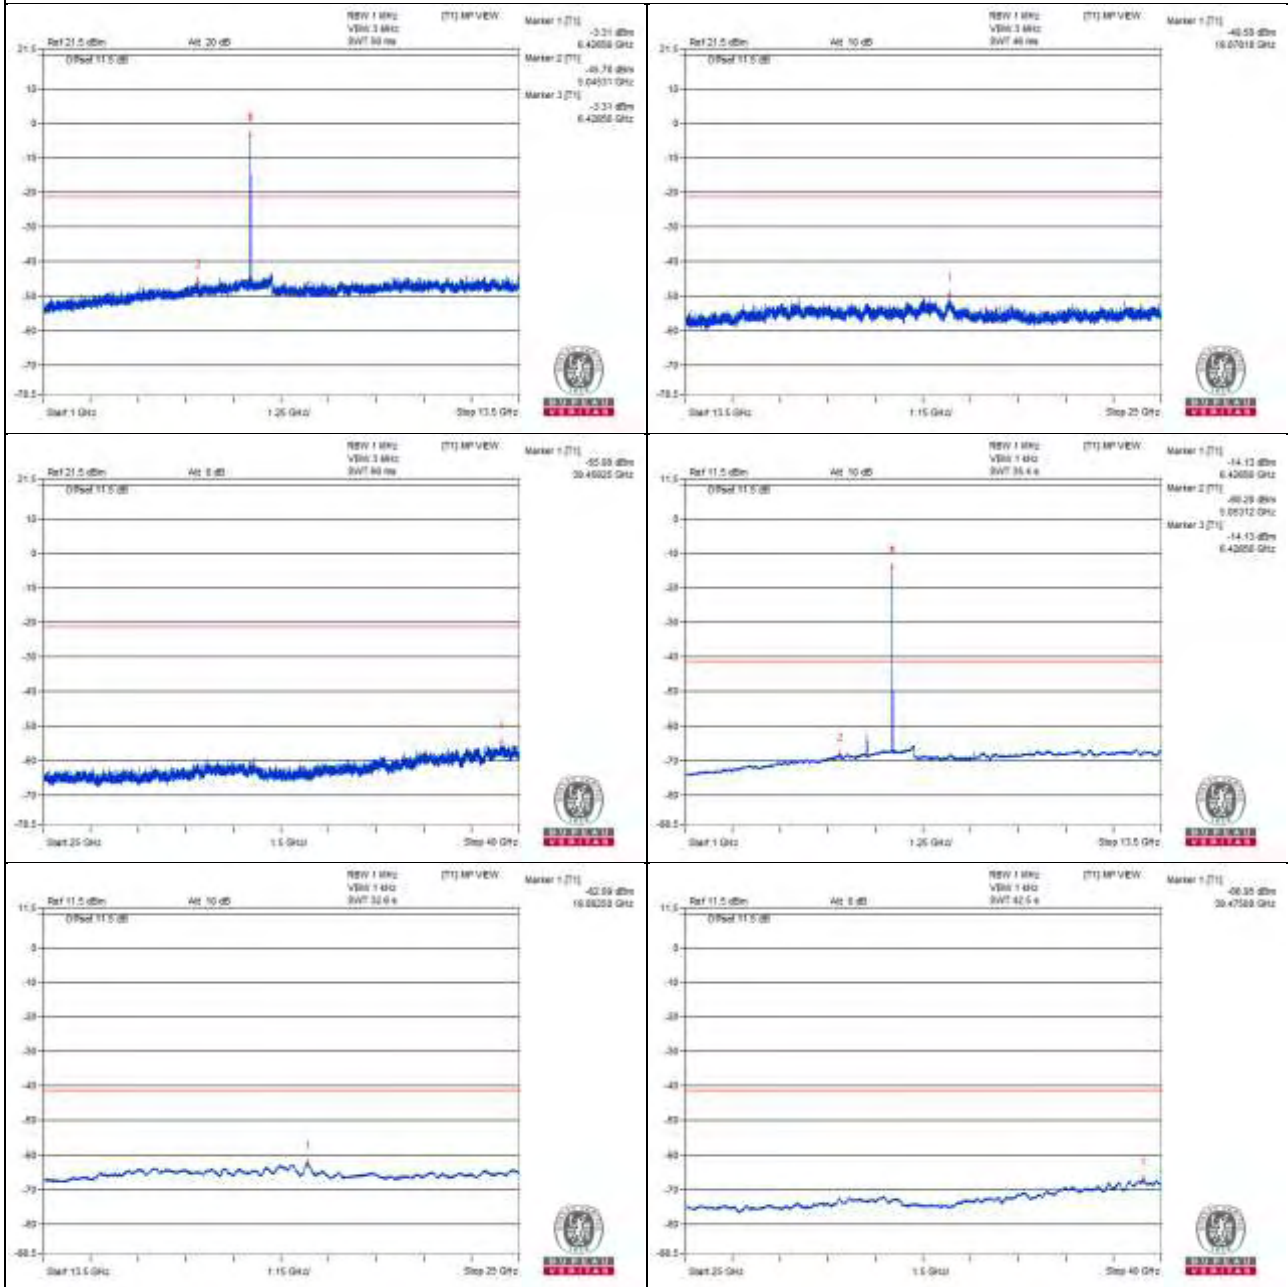

Channel 105

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	4309.37 PK	58.3	74	-15.7	-48.13	-48.16	8.17	-36.96
2	4315.62 AV	36.53	54	-17.47	-69.71	-70.12	8.17	-58.73
3	8642.18 PK	59.16	88.2	-29.04	-46.23	-48.66	8.17	-36.1
4	8632.81 AV	43.74	68.2	-24.46	-60.34	-68.25	8.17	-51.52
5	12940.62 PK	60.35	88.2	-27.85	-45.26	-47.12	8.17	-34.91
6	12931.25 AV	38.71	68.2	-29.49	-67.74	-67.73	8.17	-56.55
7	19434 PK	54.43	74	-19.57	-51.17	-53.05	8.17	-40.83
8	19444.06 AV	42.8	54	-11.2	-63.74	-63.54	8.17	-52.46

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

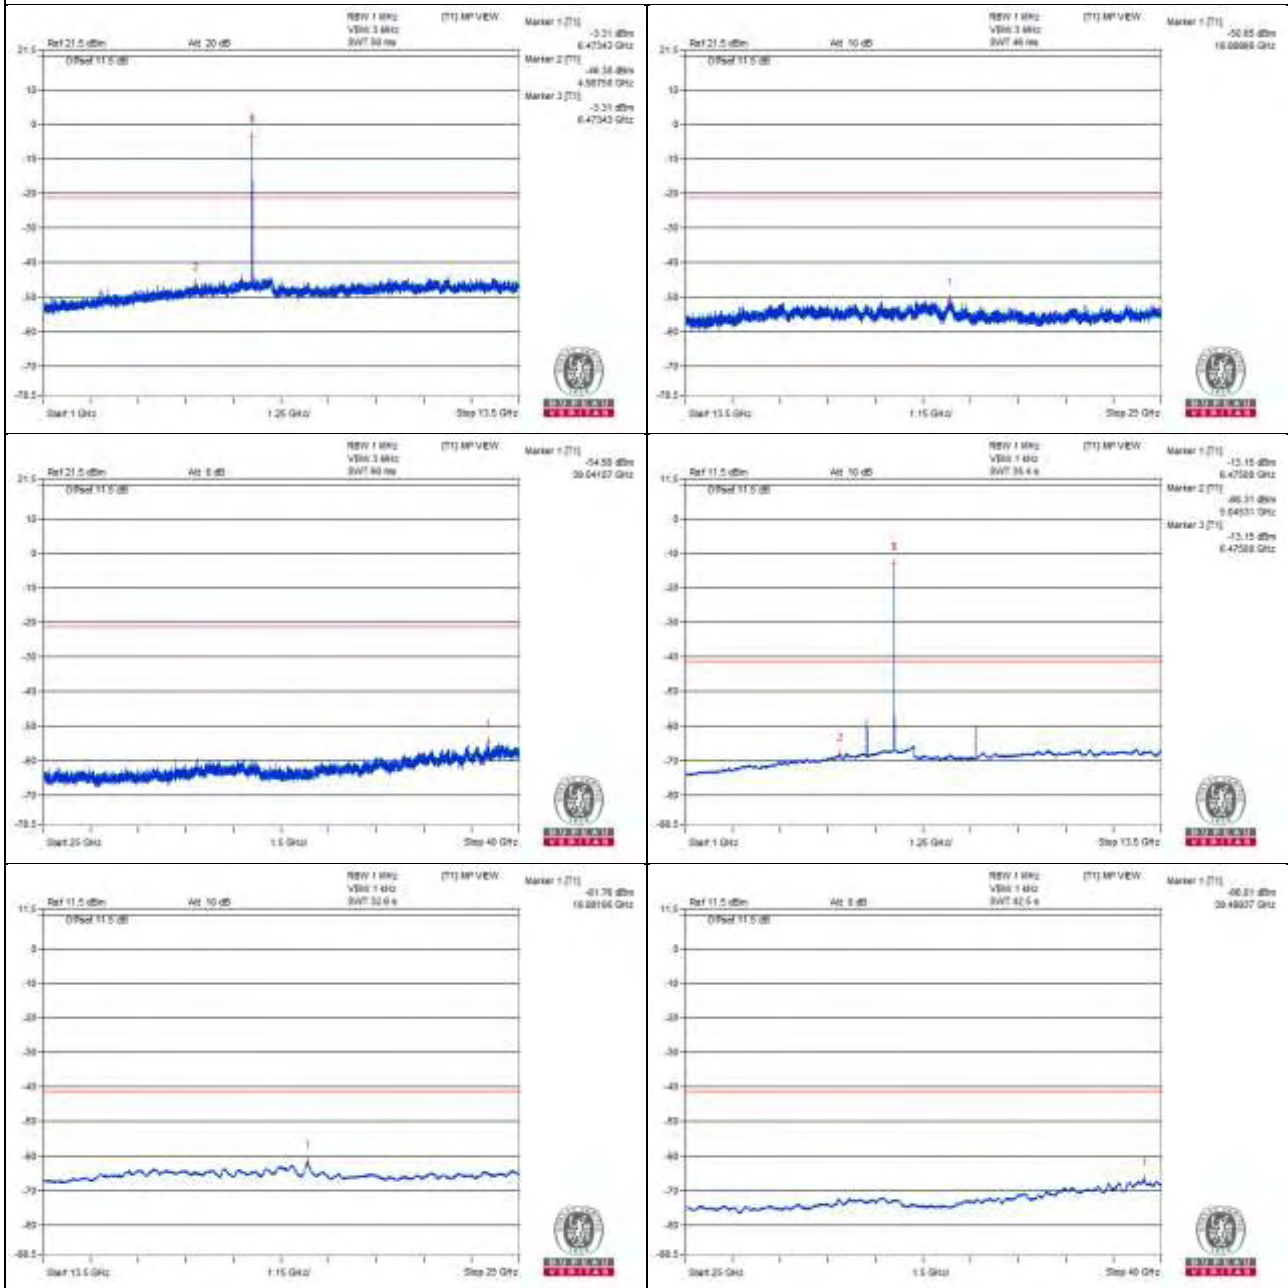

Chain 1

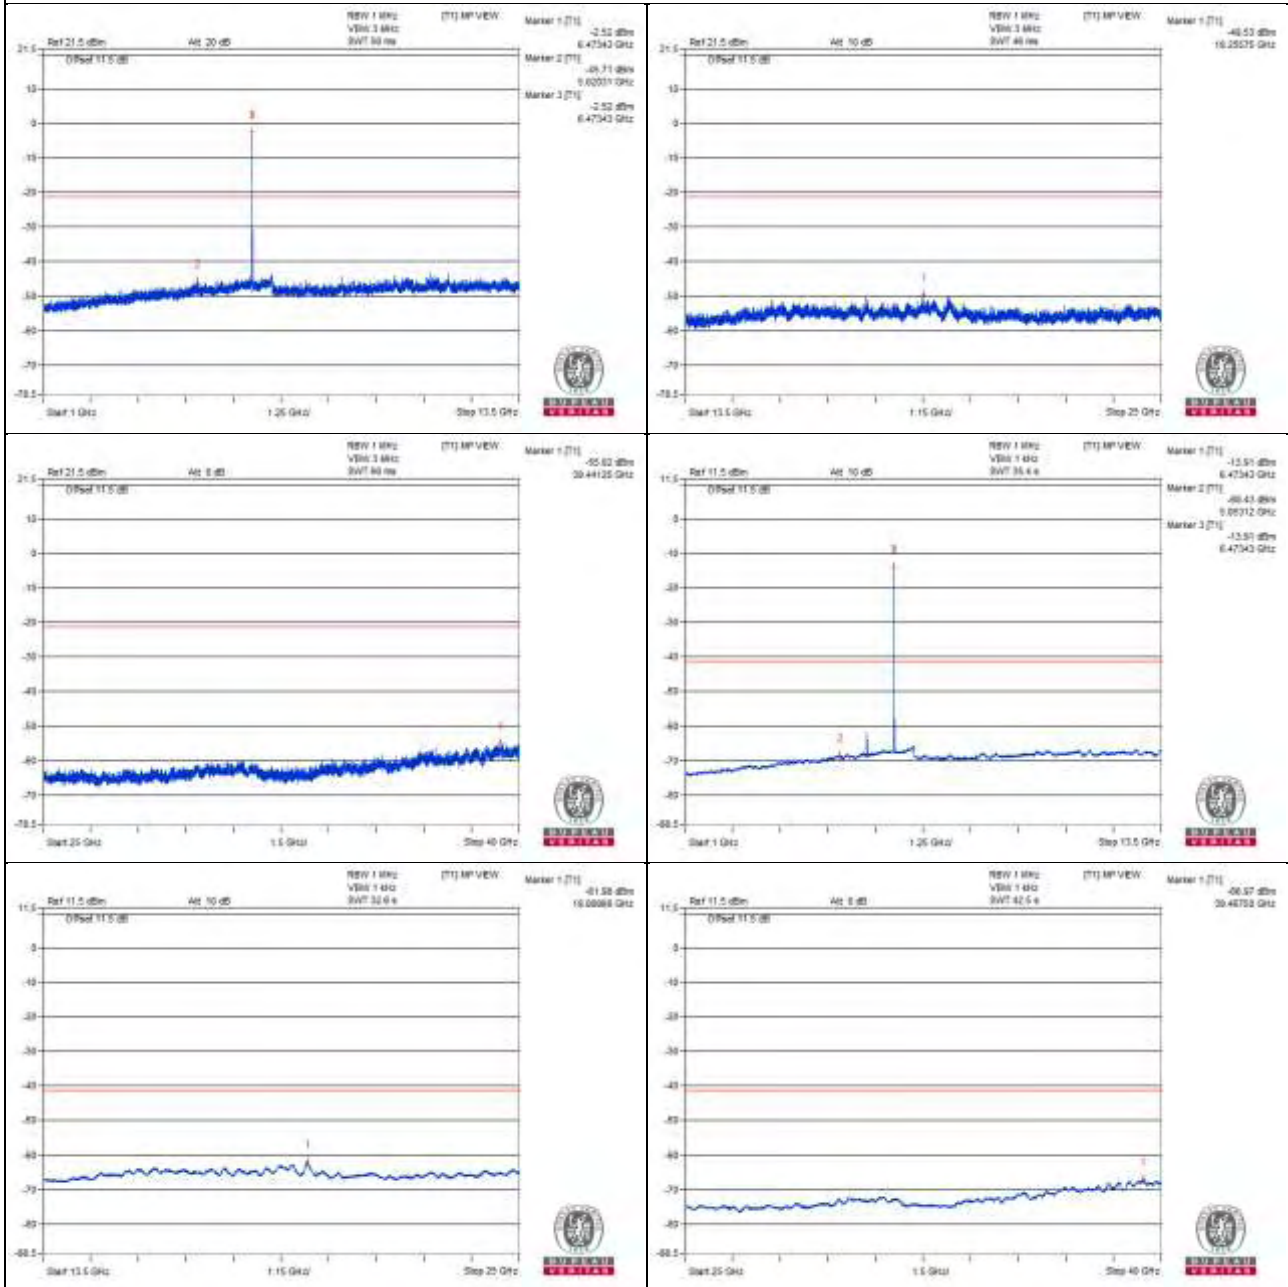

Channel 113

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	4332.81 PK	57.97	74	-16.03	-49.65	-47.55	8.17	-37.29
2	4342.18 AV	36.53	54	-17.47	-70.11	-69.72	8.17	-58.73
3	8687.5 PK	59.27	88.2	-28.93	-48.54	-46.13	8.17	-35.99
4	8687.5 AV	43.06	68.2	-25.14	-61.22	-67.89	8.17	-52.2
5	13043.75 PK	60.13	88.2	-28.07	-46.84	-45.84	8.17	-35.13
6	13029.68 AV	38.72	68.2	-29.48	-67.88	-67.57	8.17	-56.54
7	19549 PK	55.35	74	-18.65	-50.19	-52.24	8.17	-39.91
8	19534.62 AV	43.49	54	-10.51	-62.93	-62.98	8.17	-51.77

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

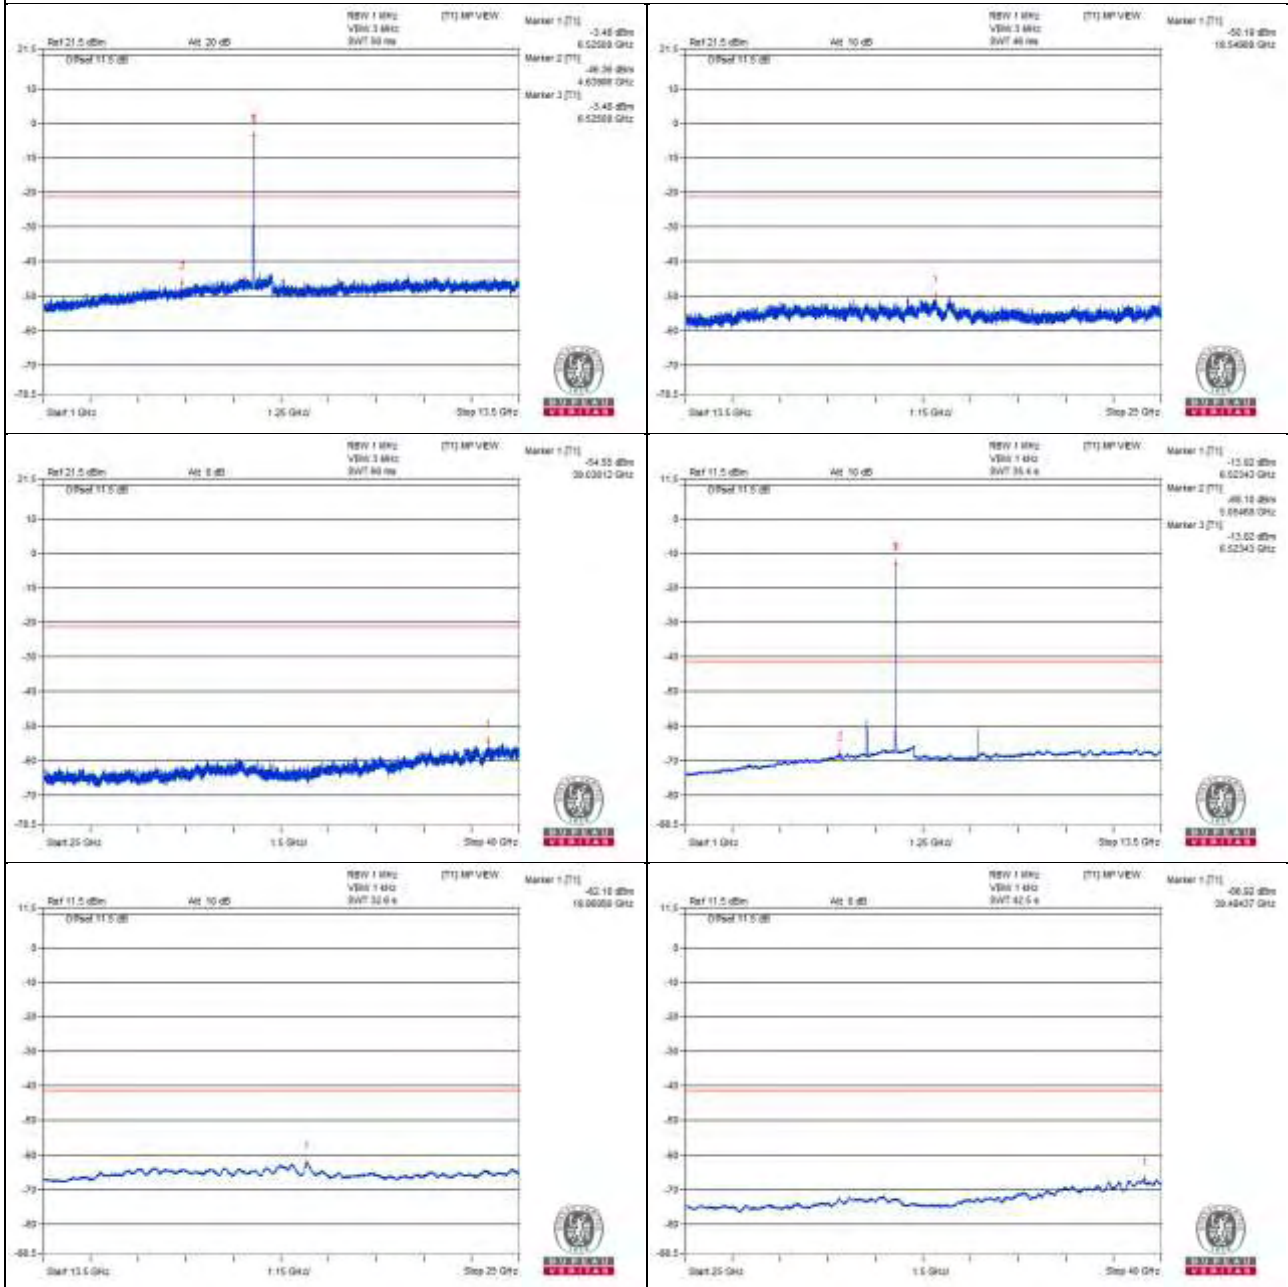

Chain 1

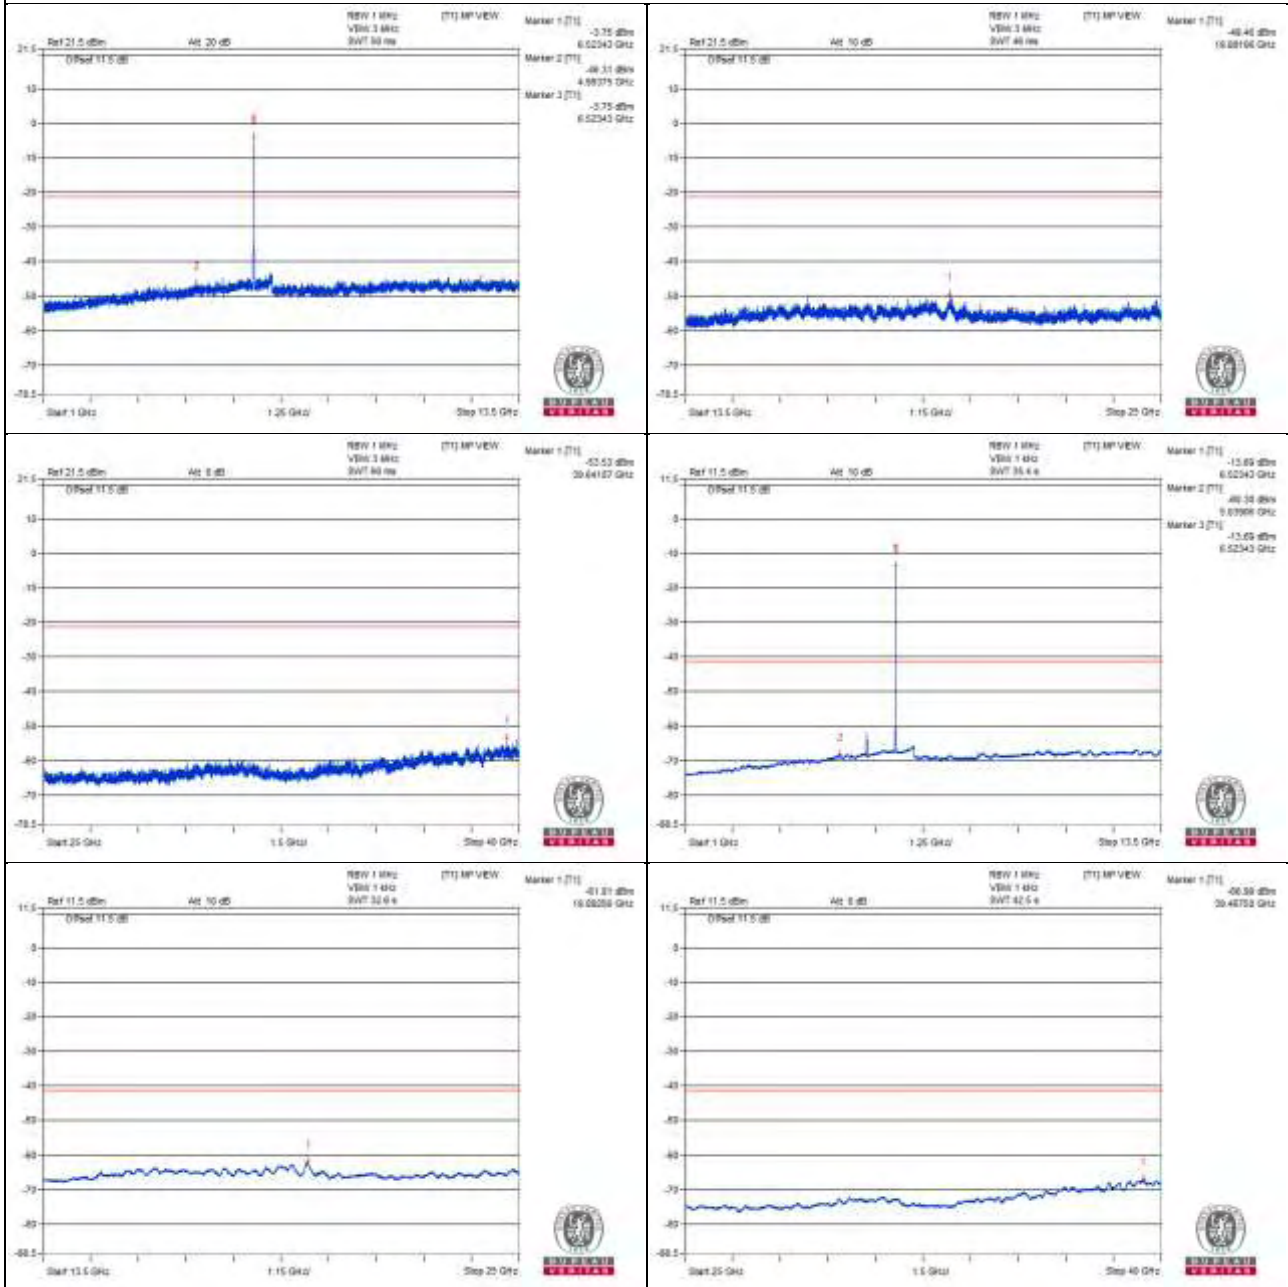

Channel 117

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	4376.56 PK	57.64	74	-16.36	-48.74	-48.87	8.17	-37.62
2	4354.68 AV	36.65	54	-17.35	-69.71	-69.87	8.17	-58.61
3	8726.56 PK	59.09	88.2	-29.11	-47.12	-47.59	8.17	-36.17
4	8712.5 AV	39.07	68.2	-29.13	-66.58	-68.33	8.17	-56.19
5	13076.56 PK	60.18	88.2	-28.02	-45.82	-46.75	8.17	-35.08
6	13087.5 AV	39.03	68.2	-29.17	-67.31	-67.51	8.17	-56.23
7	19587.81 PK	53.45	74	-20.55	-53.18	-52.81	8.17	-41.81
8	19589.25 AV	42.15	54	-11.85	-64.44	-64.14	8.17	-53.11

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

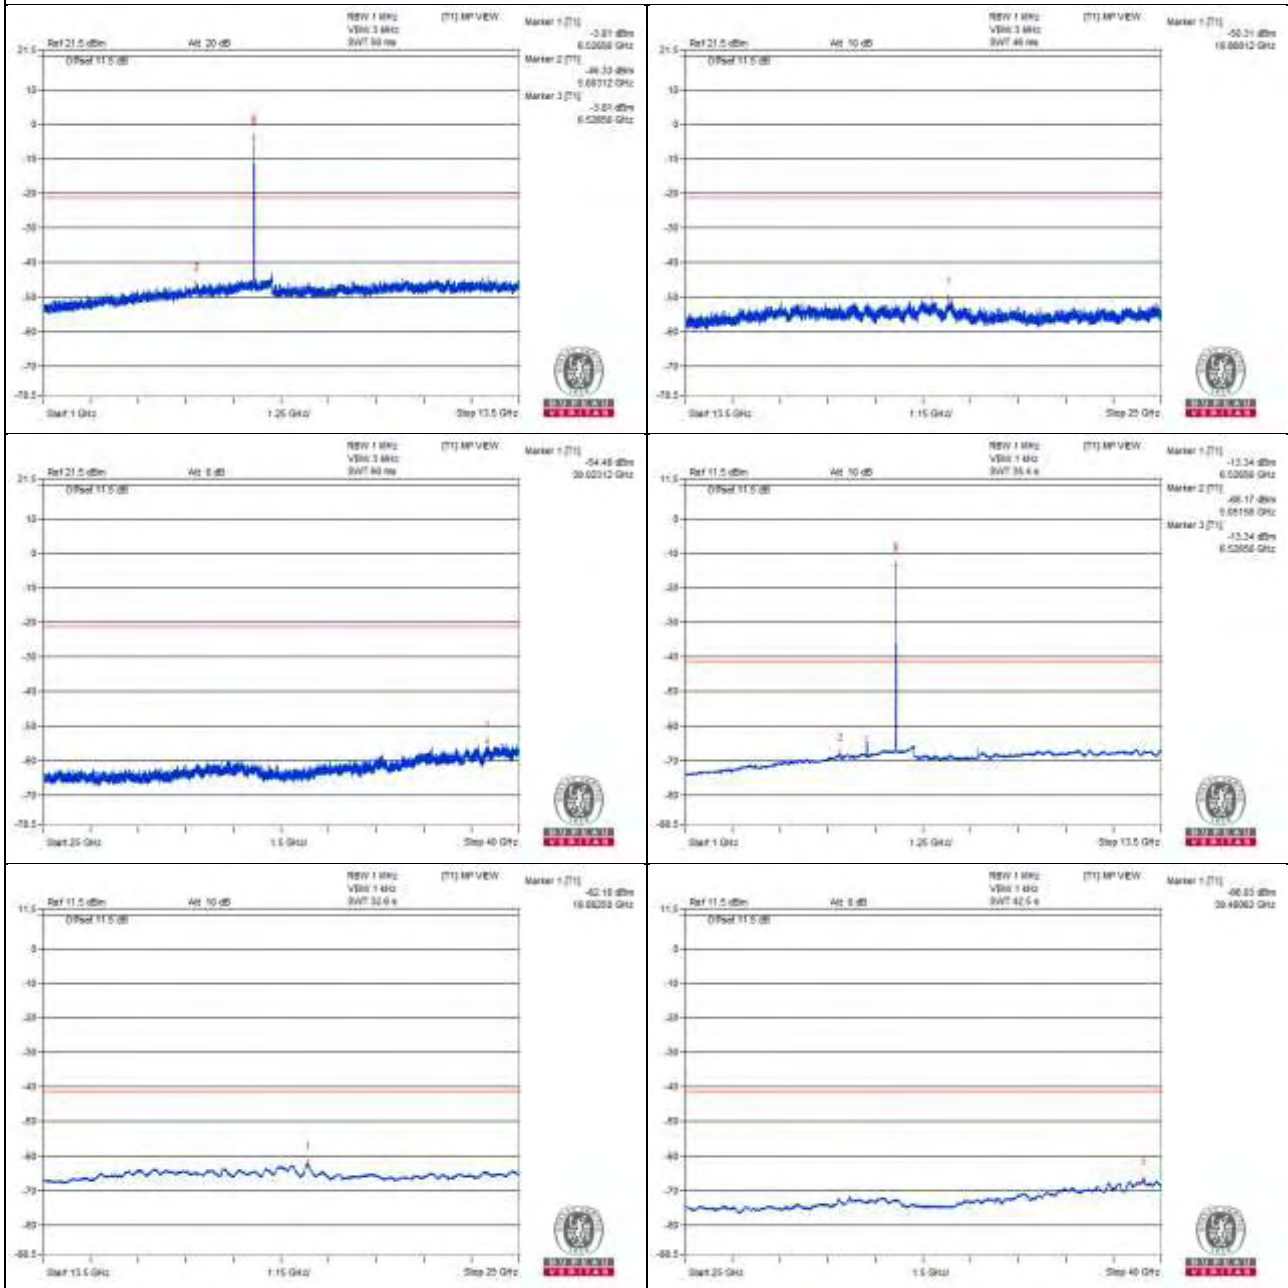

Chain 1

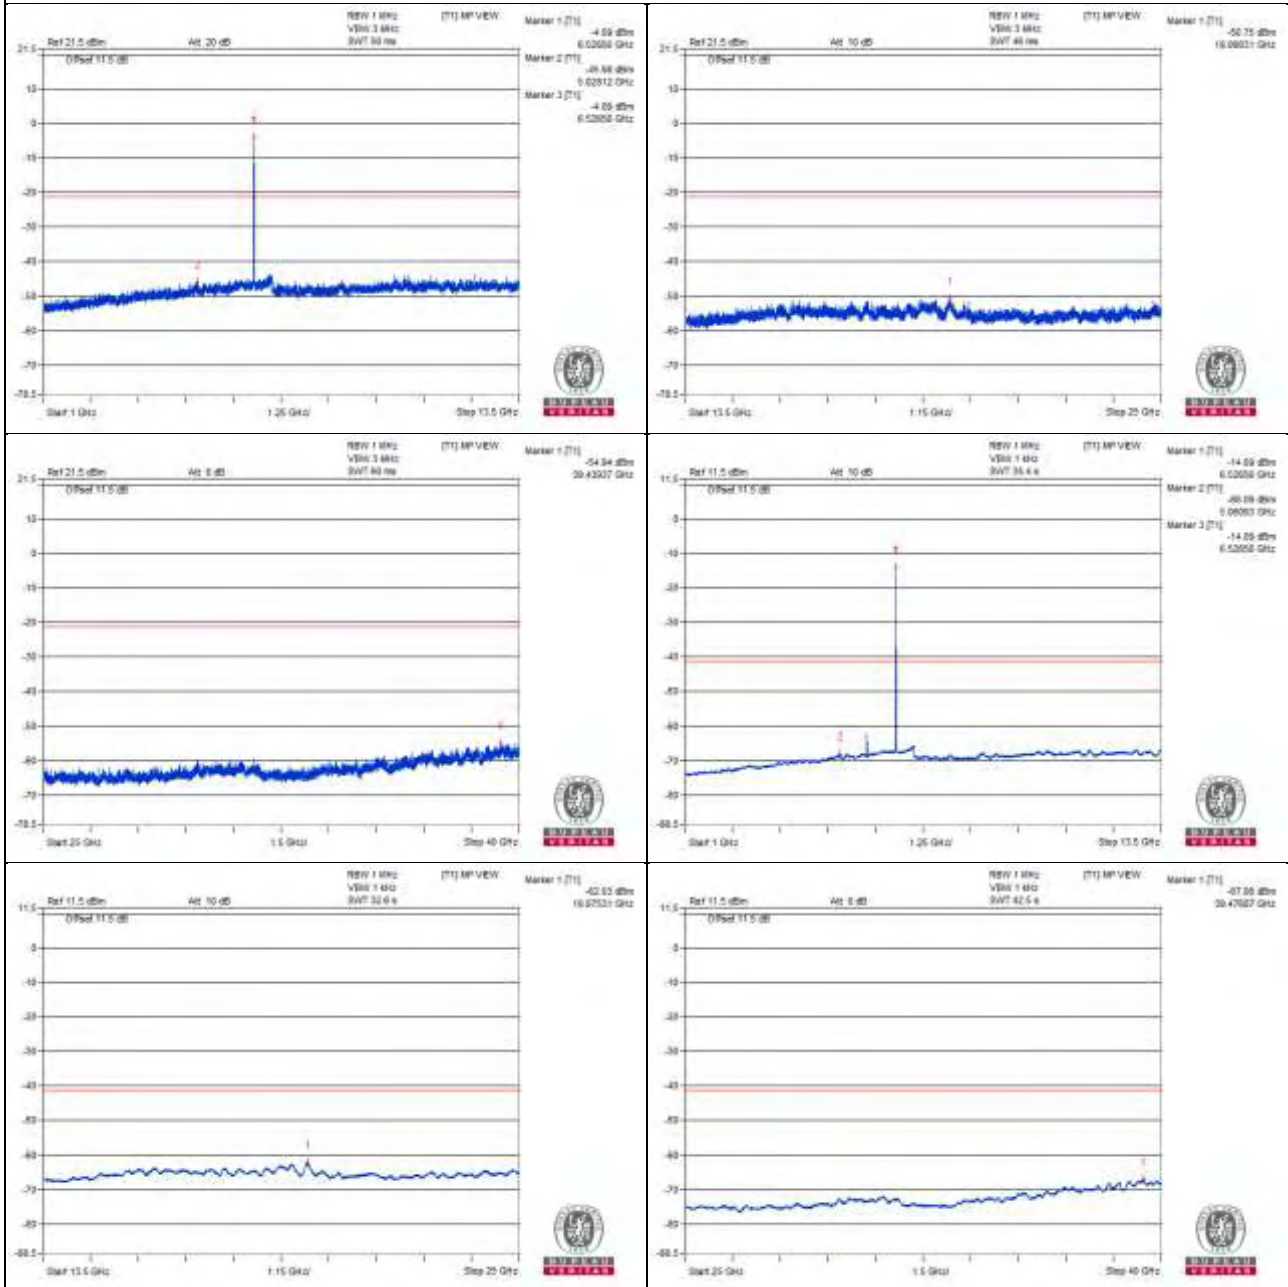

Channel 149

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	4457.81 PK	58.04	88.2	-30.16	-48.11	-48.71	8.17	-37.22
2	4454.68 AV	36.31	68.2	-31.89	-70.42	-69.85	8.17	-58.95
3	8939.06 PK	59.12	88.2	-29.08	-47.04	-47.61	8.17	-36.14
4	8926.56 AV	37.9	68.2	-30.3	-68.39	-68.69	8.17	-57.36
5	13395.31 PK	59.8	74	-14.2	-47.88	-45.68	8.17	-35.46
6	13396.87 AV	38.21	54	-15.79	-68.16	-68.3	8.17	-57.05
7	20103.87 PK	52.28	74	-21.72	-55.09	-53.39	8.17	-42.98
8	20072.25 AV	40.77	54	-13.23	-65.41	-65.95	8.17	-54.49

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

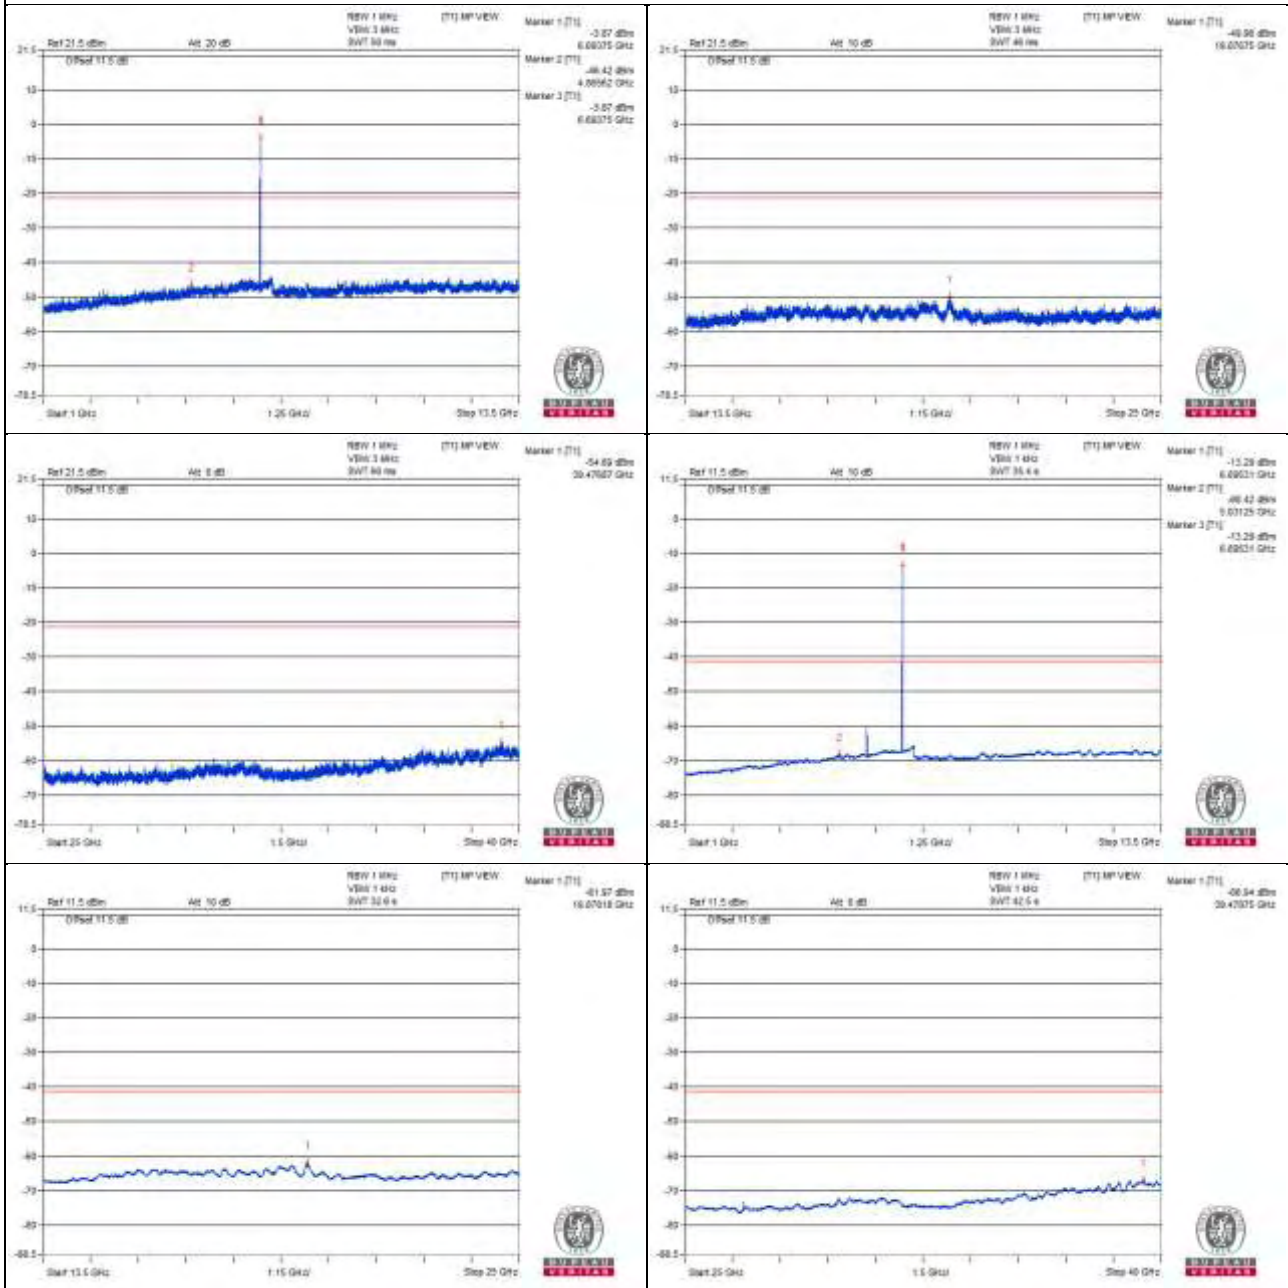

Chain 1

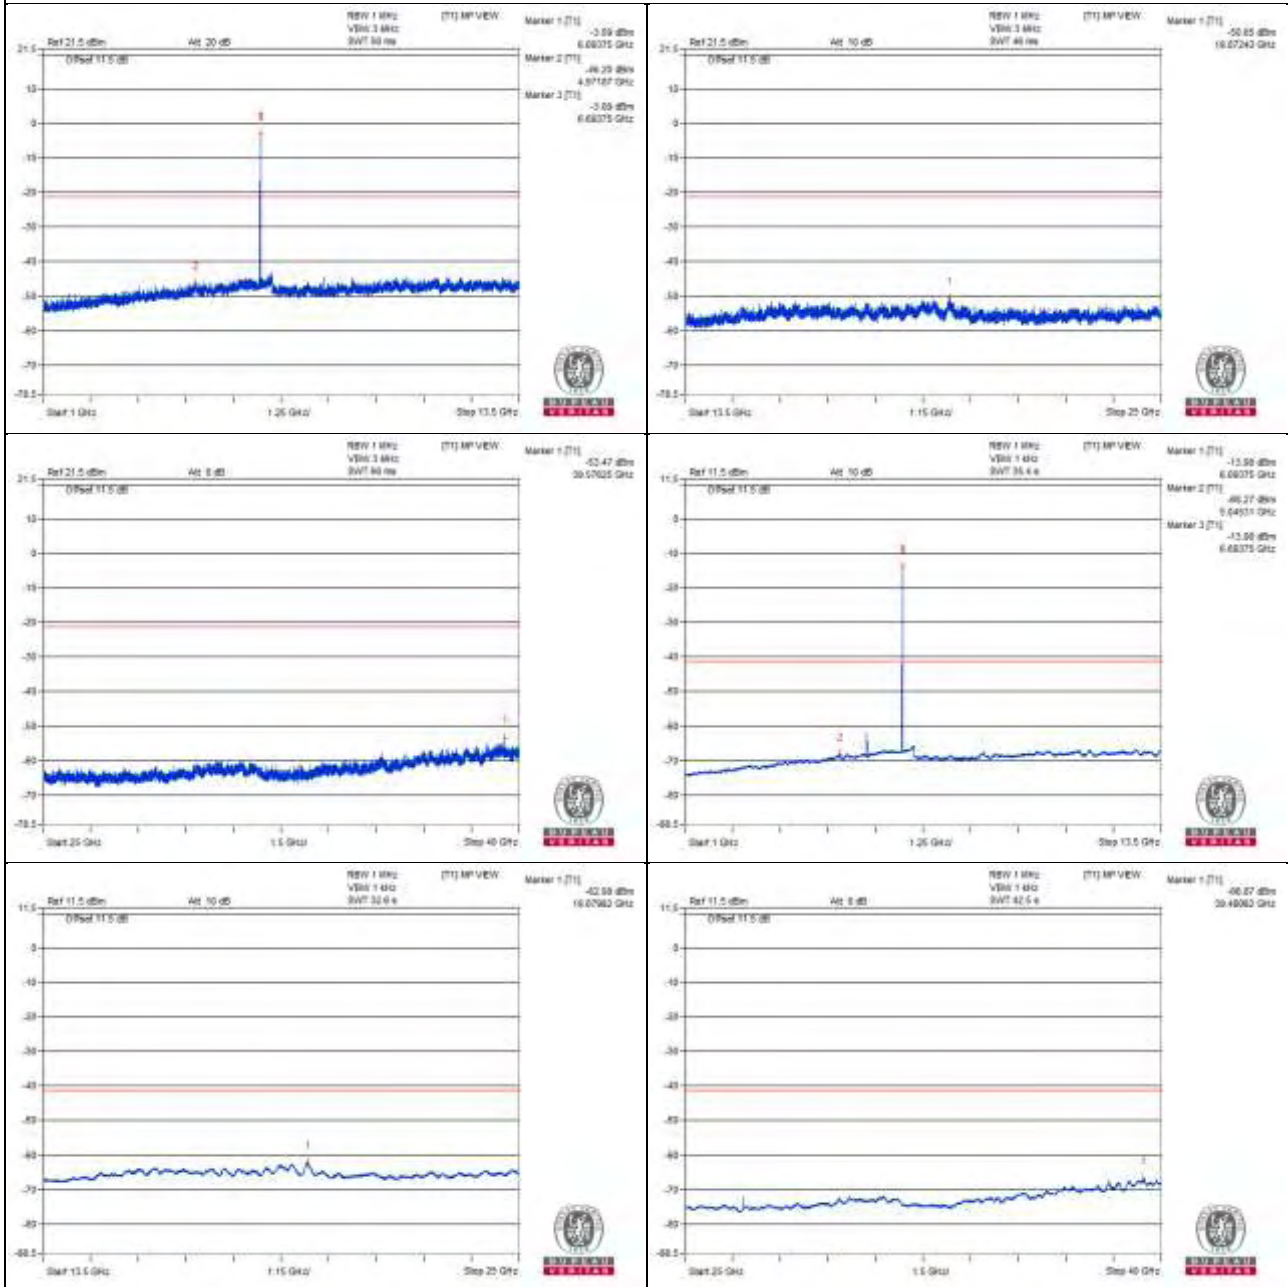

Channel 181

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	4560.93 PK	58.07	74	-15.93	-48.81	-47.97	8.17	-37.19
2	4587.5 AV	36.65	54	-17.35	-69.73	-69.86	8.17	-58.61
3	9142.18 PK	60.41	74	-13.59	-45.62	-46.48	8.17	-34.85
4	9150 AV	38.26	54	-15.74	-68.22	-68.14	8.17	-57
5	13696.93 PK	49.73	88.2	-38.47	-56.76	-56.67	8.17	-45.53
6	13708.43 AV	39.29	68.2	-28.91	-67.3	-67	8.17	-55.97
7	20561 PK	51.59	74	-22.41	-55.43	-54.34	8.17	-43.67
8	20578.25 AV	40.66	54	-13.34	-65.9	-65.66	8.17	-54.6

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

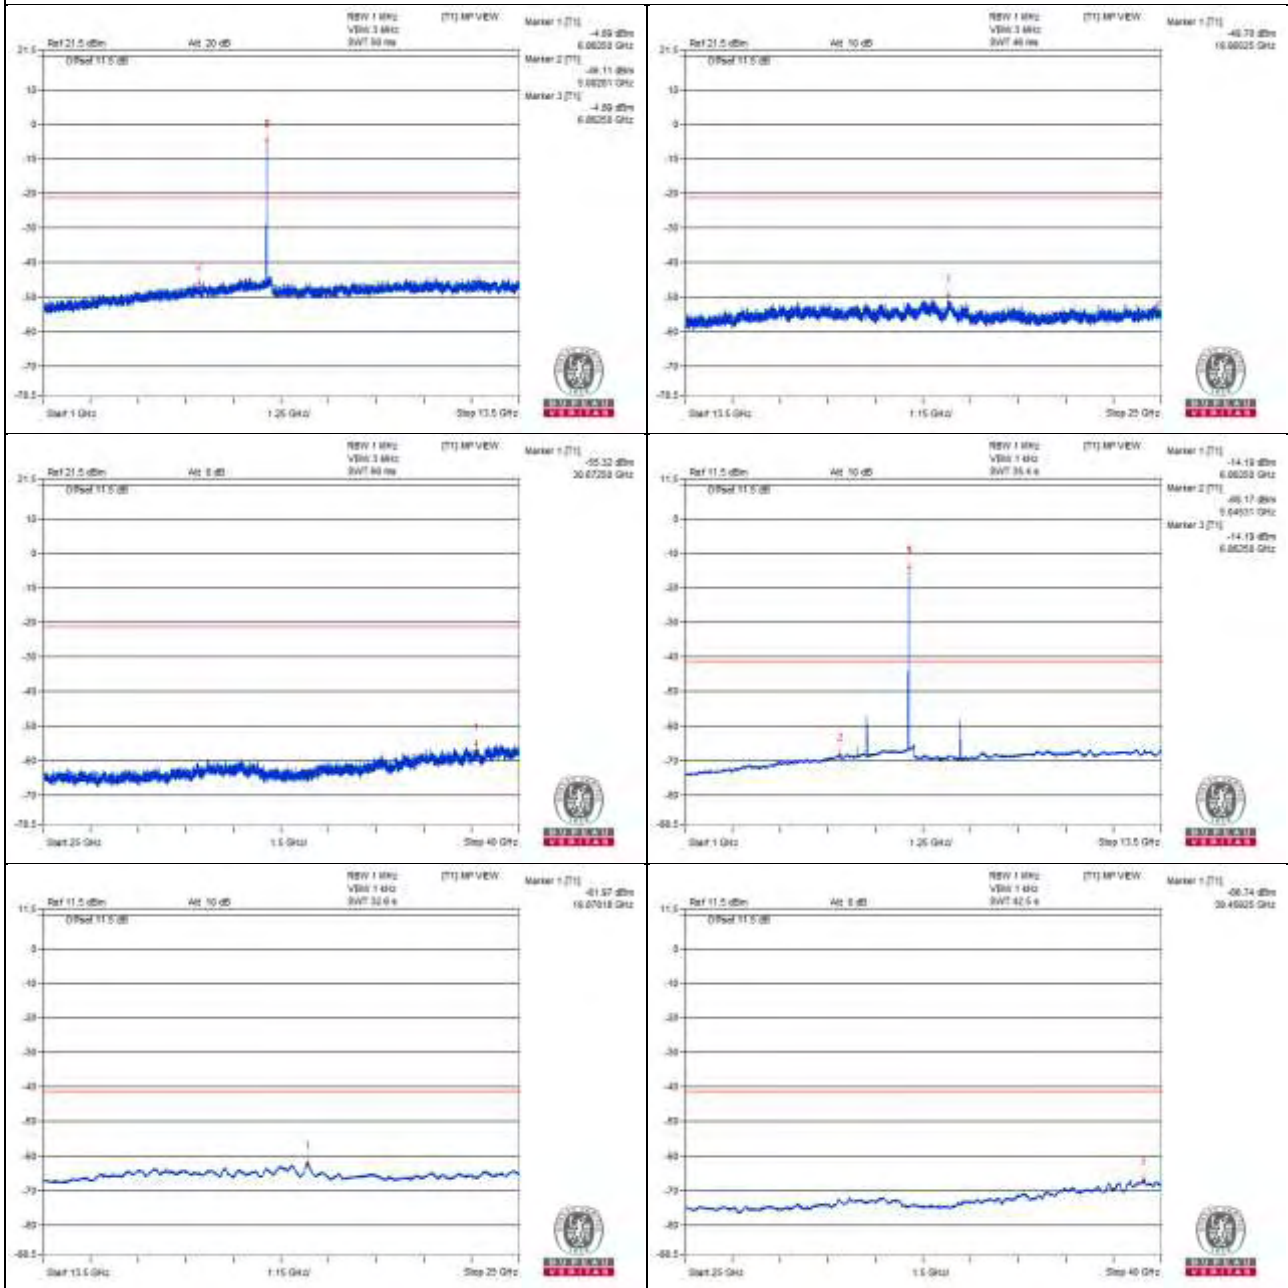

Chain 1

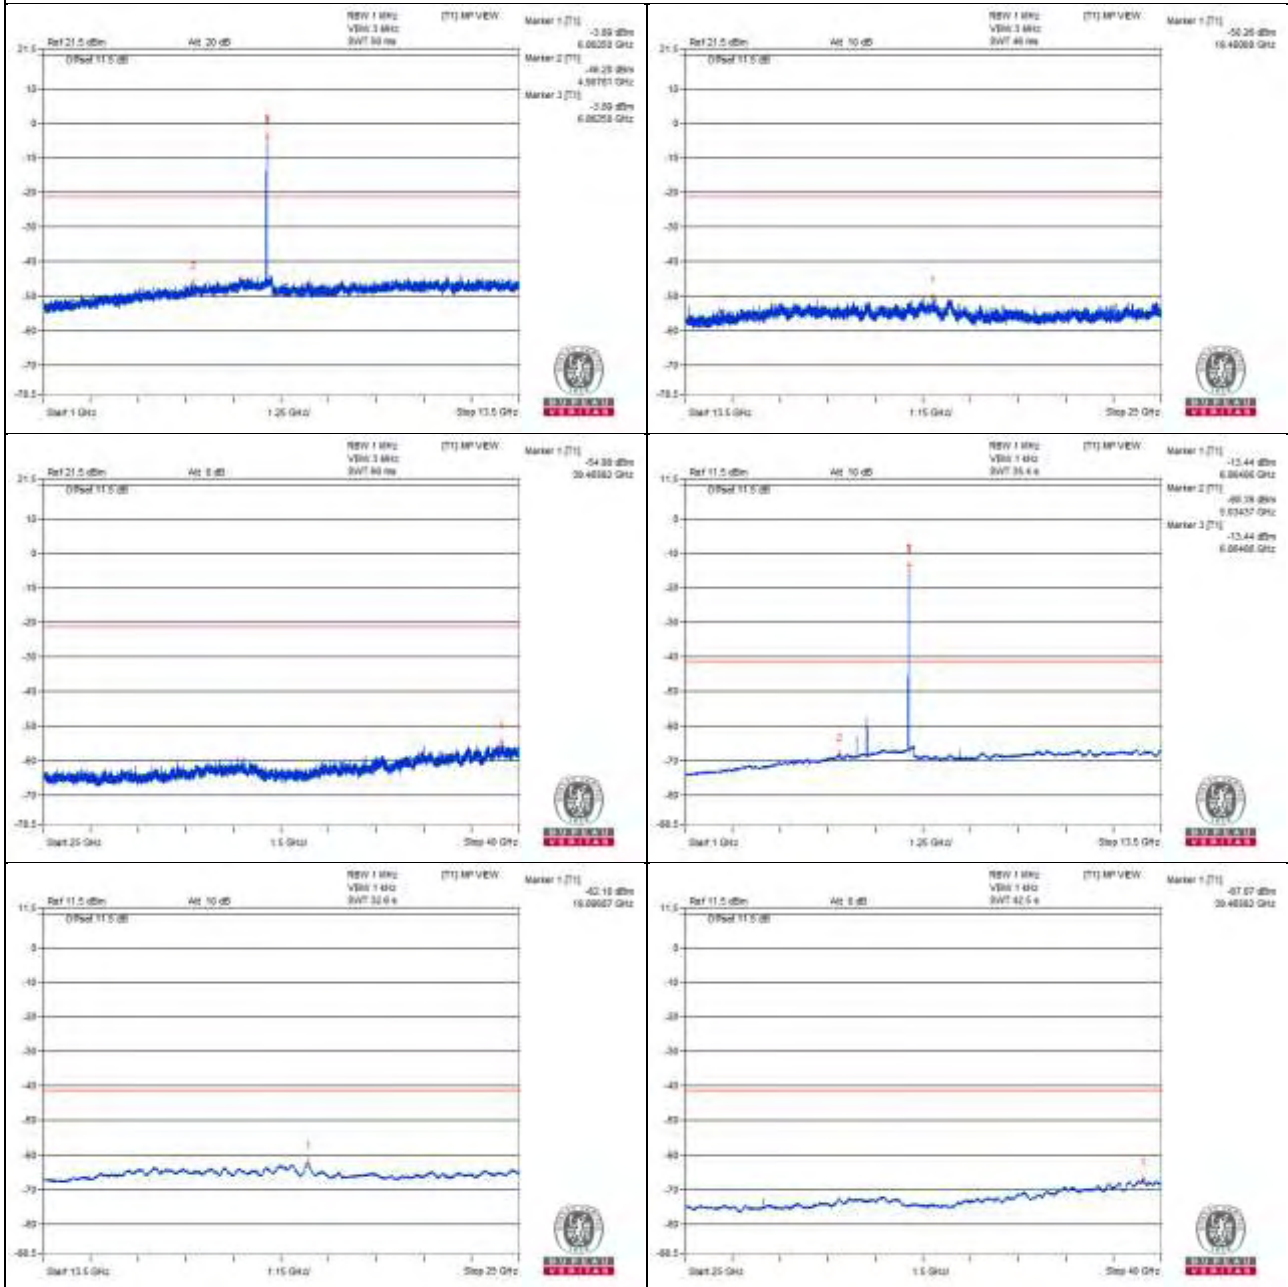

Channel 185

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	4590.62 PK	59.22	74	-14.78	-45.81	-49.32	8.17	-36.04
2	4585.93 AV	36.7	54	-17.3	-69.83	-69.65	8.17	-58.56
3	9176.56 PK	59.64	74	-14.36	-46.69	-46.91	8.17	-35.62
4	9165.62 AV	38.62	54	-15.38	-67.34	-68.35	8.17	-56.64
5	13755.87 PK	50.58	88.2	-37.62	-55.25	-56.58	8.17	-44.68
6	13748.68 AV	39.3	68.2	-28.9	-67.26	-67.02	8.17	-55.96
7	20618.5 PK	51.96	74	-22.04	-54.01	-55	8.17	-43.3
8	20625.68 AV	41.3	54	-12.7	-65.22	-65.07	8.17	-53.96

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

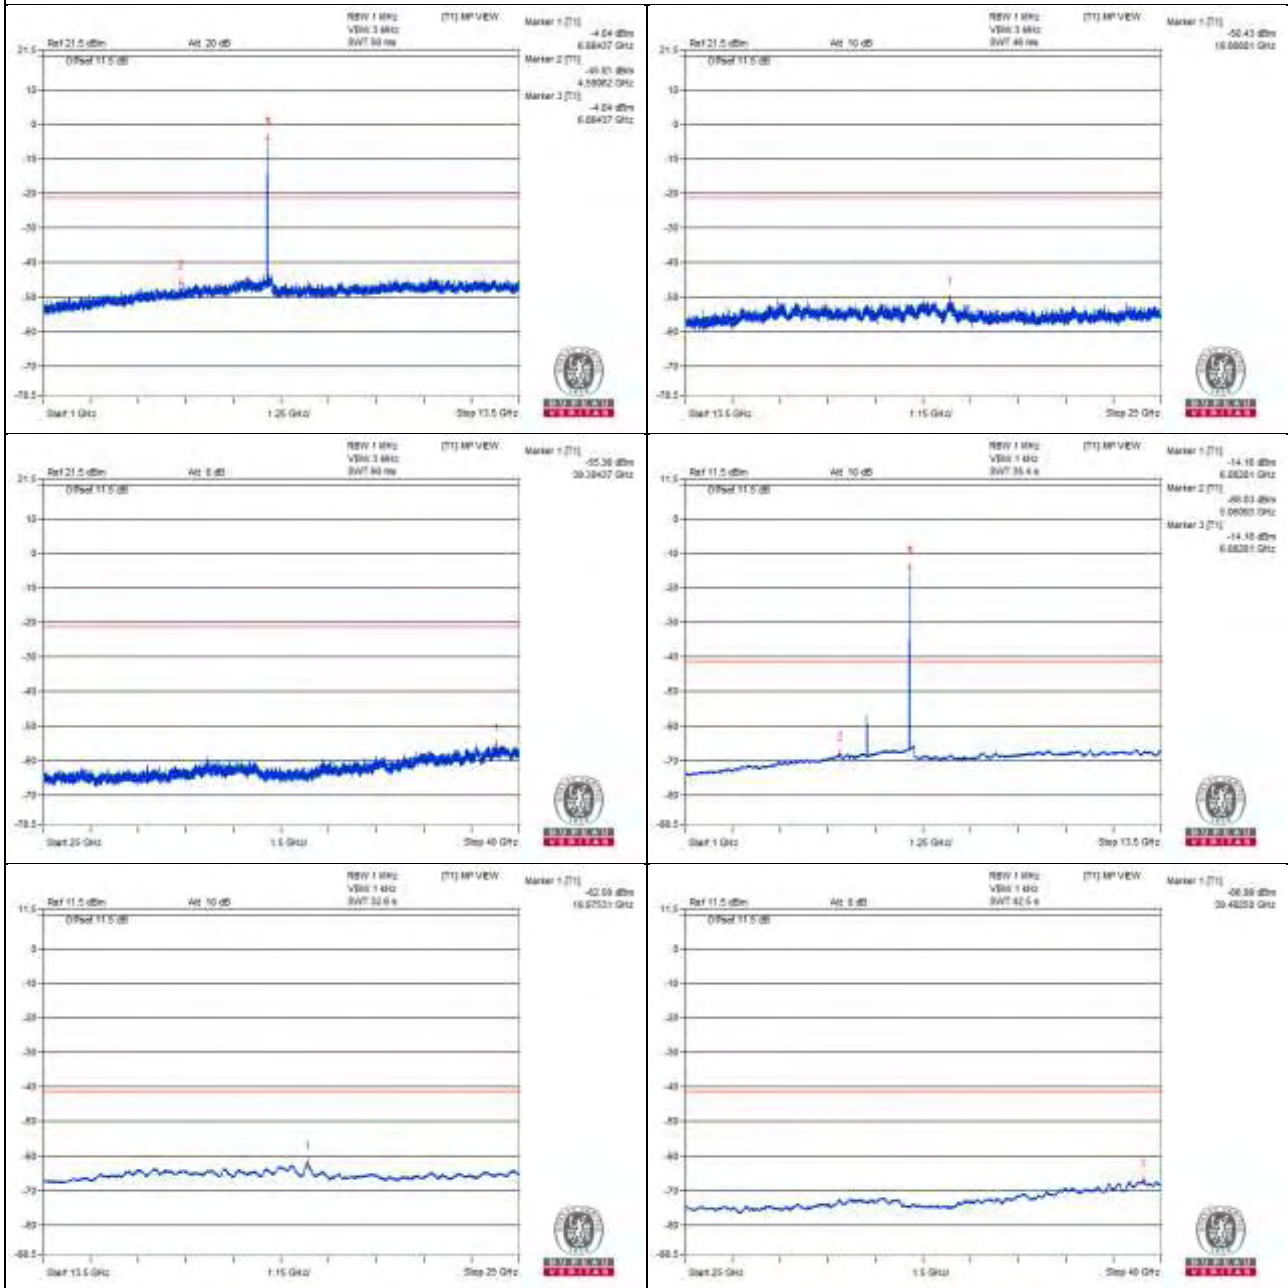

Chain 1

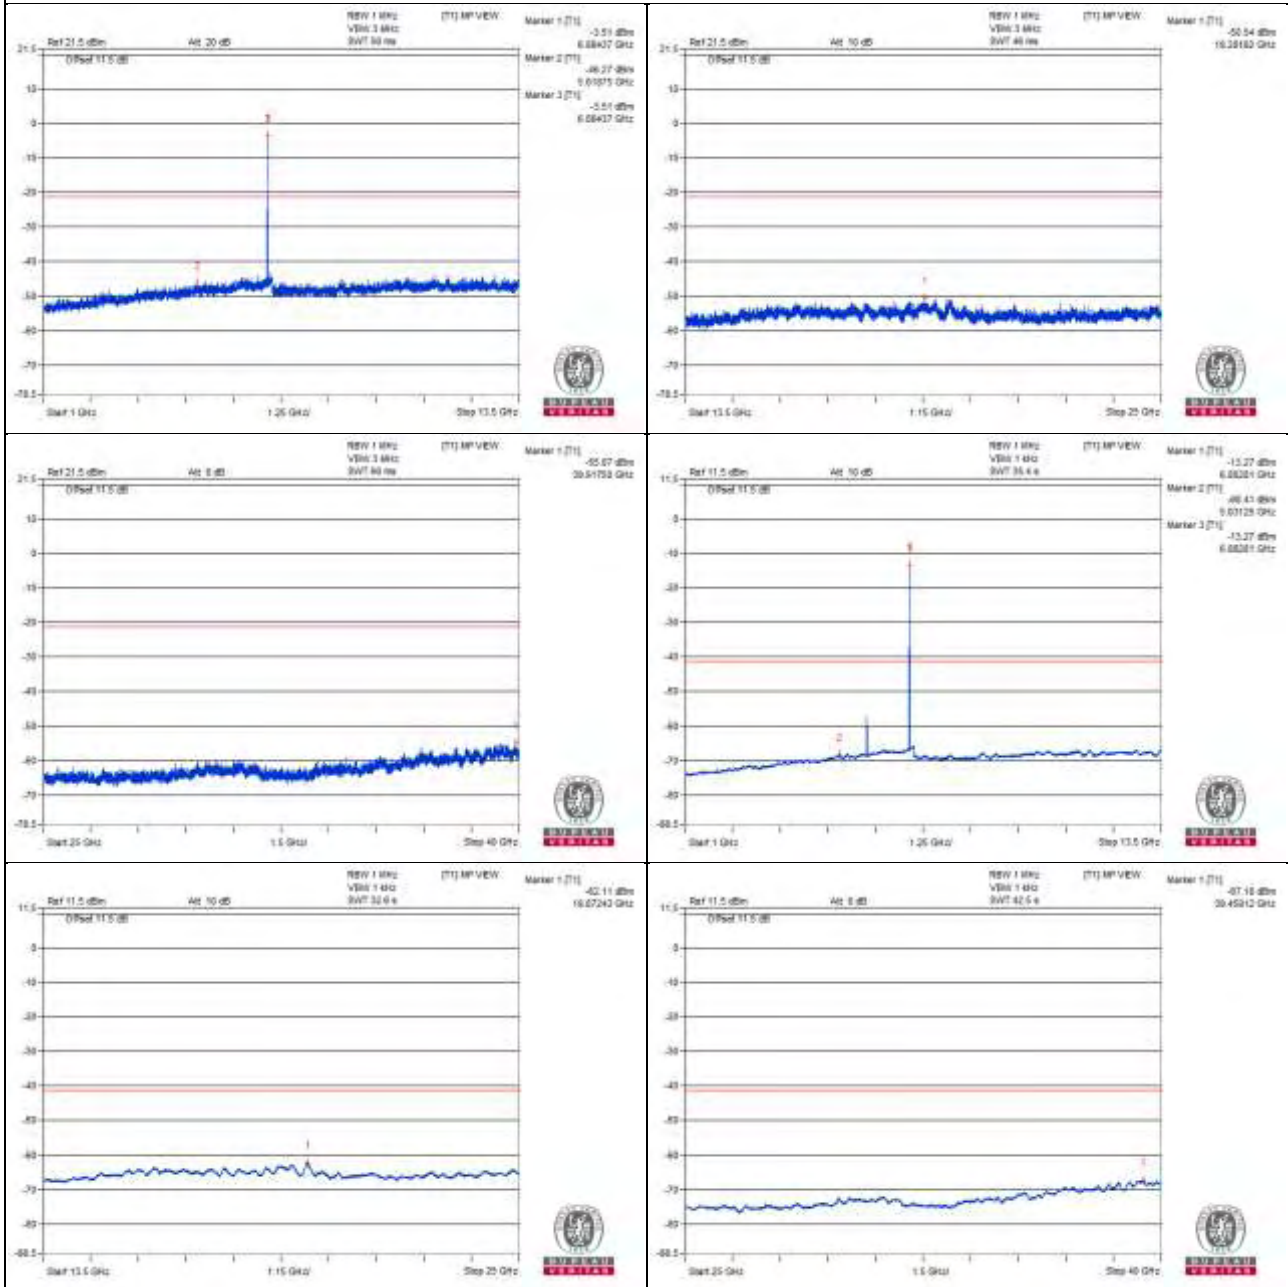

Channel 209

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	4653.12 PK	58.21	74	-15.79	-47.49	-49.12	8.17	-37.05
2	4645.31 AV	36.77	54	-17.23	-69.46	-69.89	8.17	-58.49
3	9332.81 PK	59.36	74	-14.64	-47.01	-47.15	8.17	-35.9
4	9326.56 AV	38.03	54	-15.97	-68.36	-68.47	8.17	-57.23
5	14003.12 PK	50.38	88.2	-37.82	-55.52	-56.68	8.17	-44.88
6	13988.75 AV	39.68	68.2	-28.52	-67.27	-66.3	8.17	-55.58
7	20970.68 PK	51.58	74	-22.42	-53.9	-56.09	8.17	-43.68
8	20993.68 AV	40.47	54	-13.53	-66	-65.95	8.17	-54.79

Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

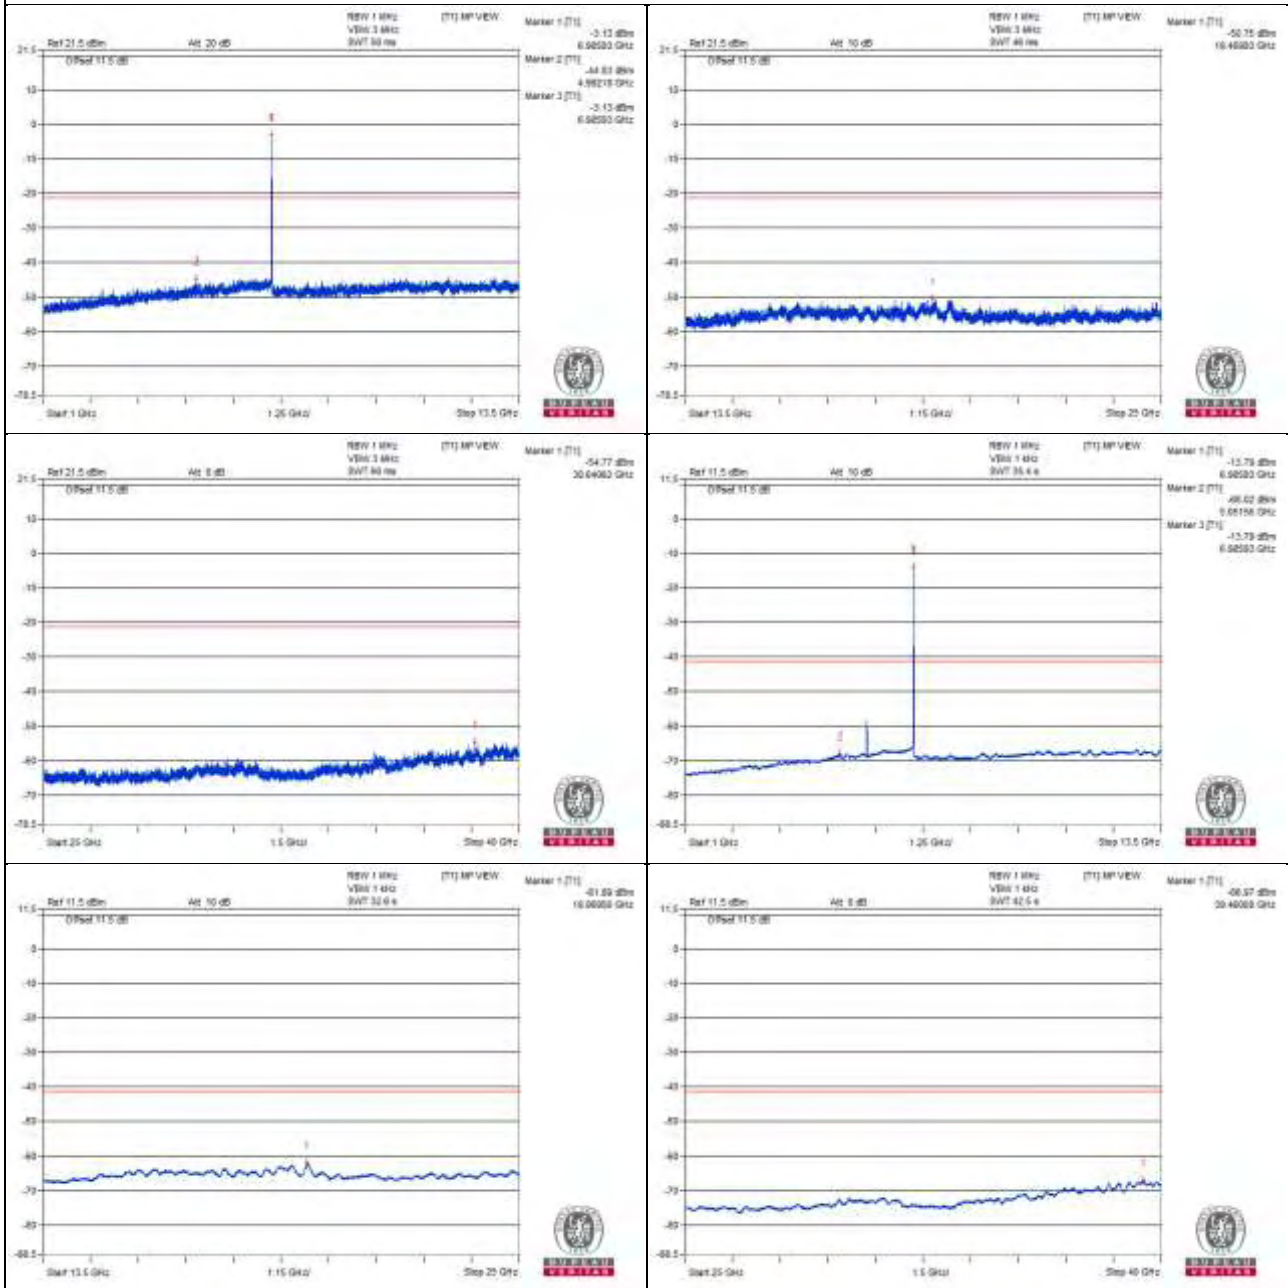

Chain 1

