



[IEEE802.11ac (VHT80)]

5.6 GHz Band, Channel Low  
Horizontal

Peak

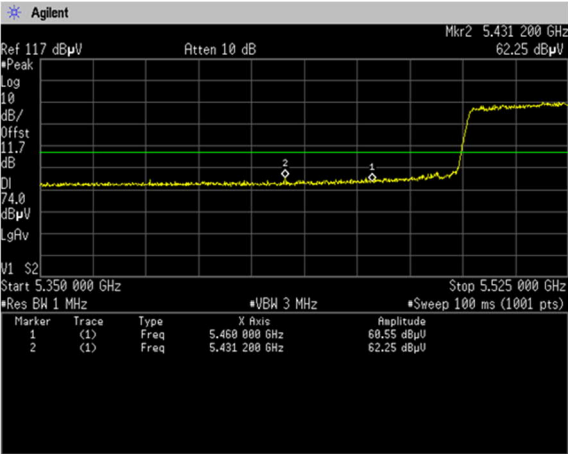


Average

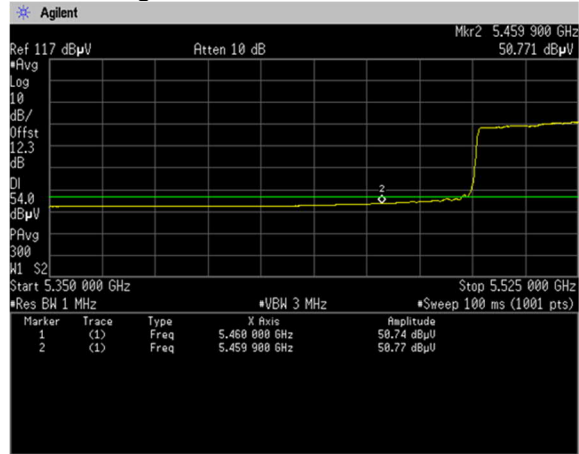


Vertical

Peak

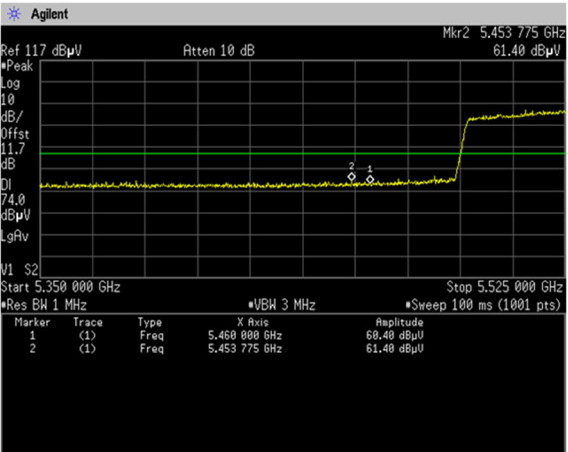

Average

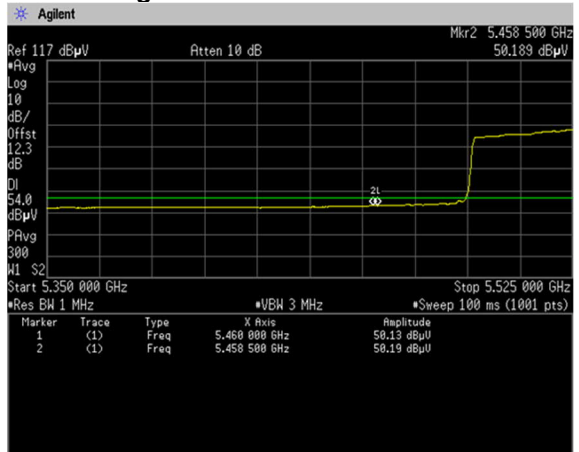


#### 4.4.4.2 Non-Restricted Bandedge

[IEEE802.11a]


#### 5.6 GHz Band, Channel High (140)

Peak

Horizontal

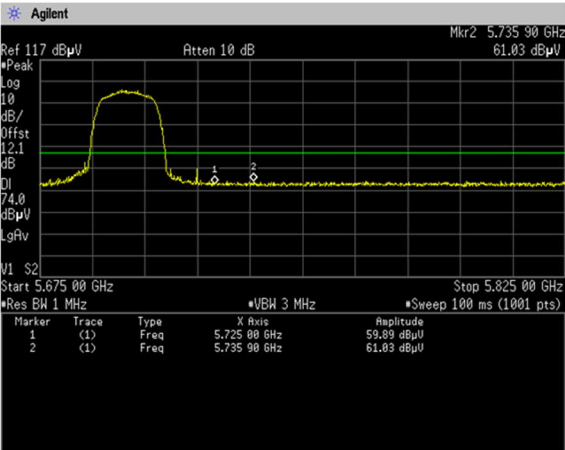


Vertical

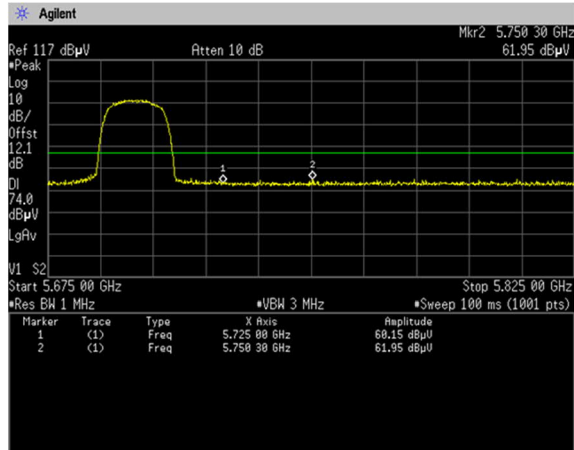


#### 5.6 GHz Band, Channel High (144)

Peak

Horizontal

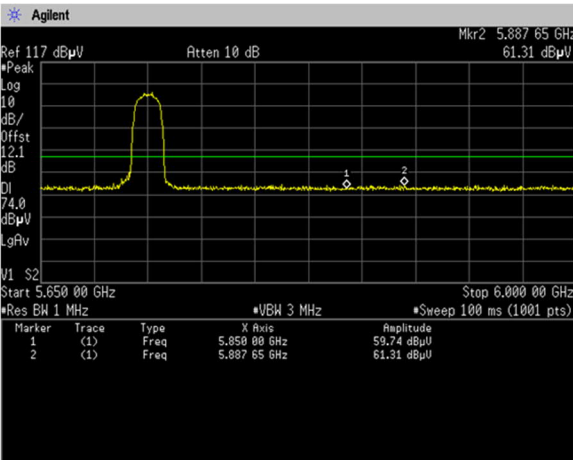

Vertical

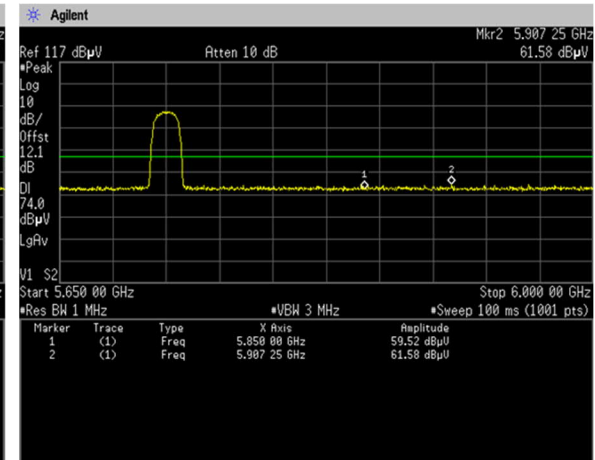


[IEEE802.11n (HT20)]


5.6GHz Band, Channel High (140)

Peak

Horizontal

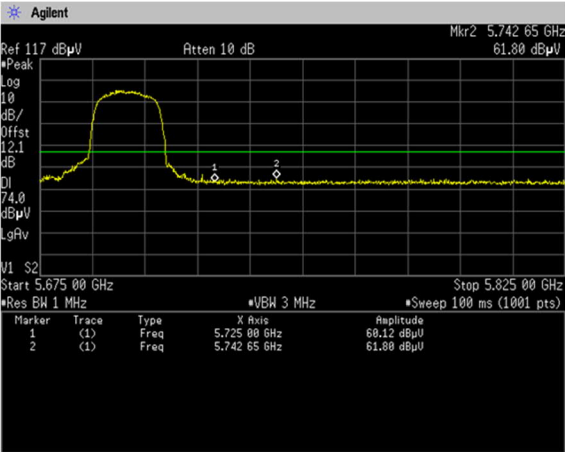


Vertical

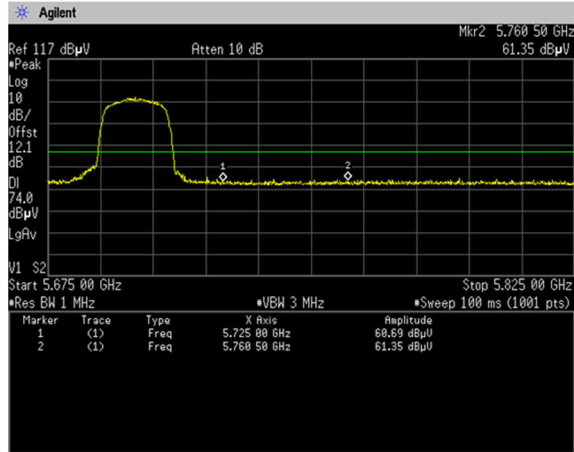


5.6GHz Band, Channel High (144)

Peak

Horizontal

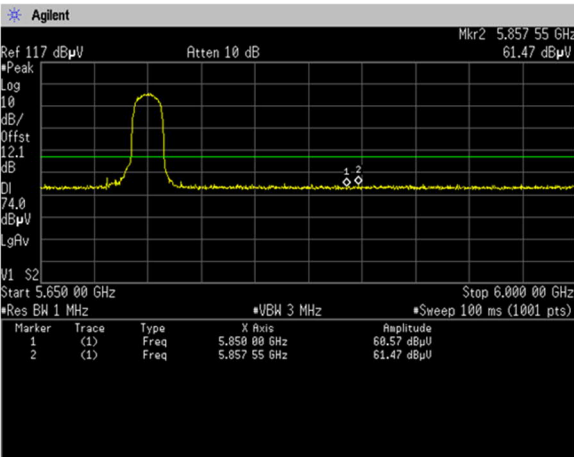

Vertical

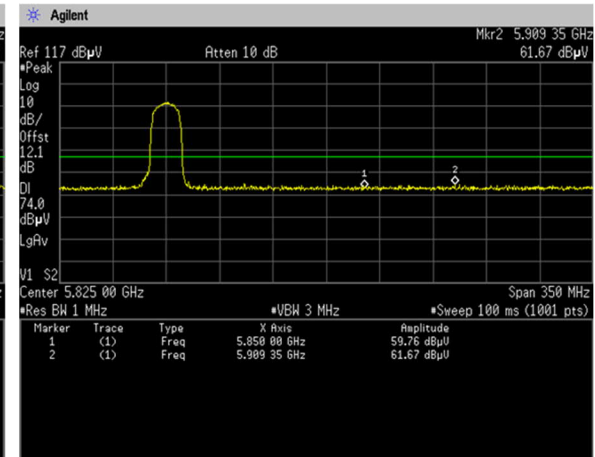


[IEEE802.11n (HT40)]


5.6GHz Band, Channel High (134)

Peak

Horizontal

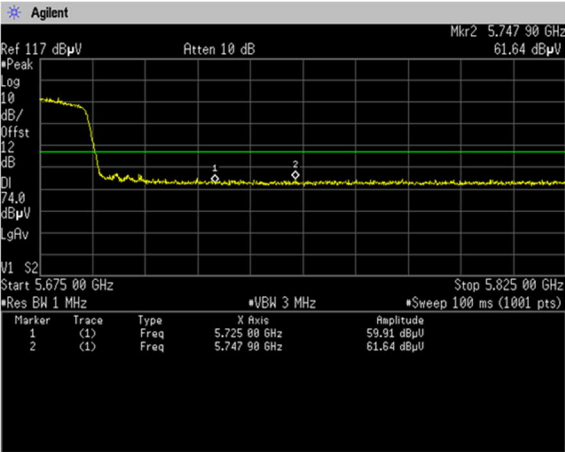


Vertical

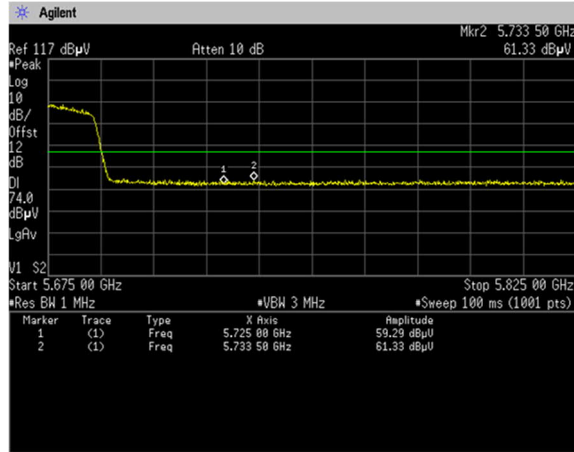


5.6GHz Band, Channel High (142)

Peak

Horizontal

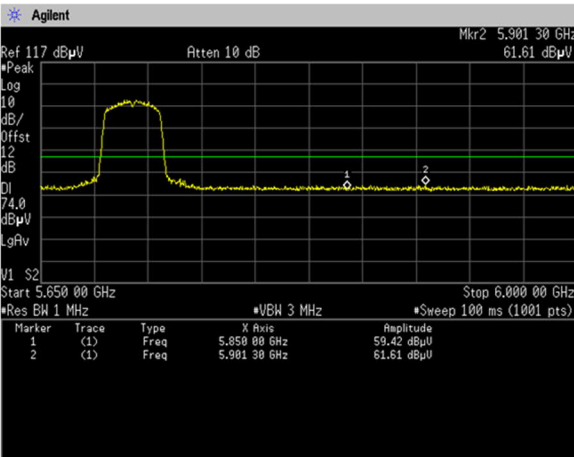

Vertical

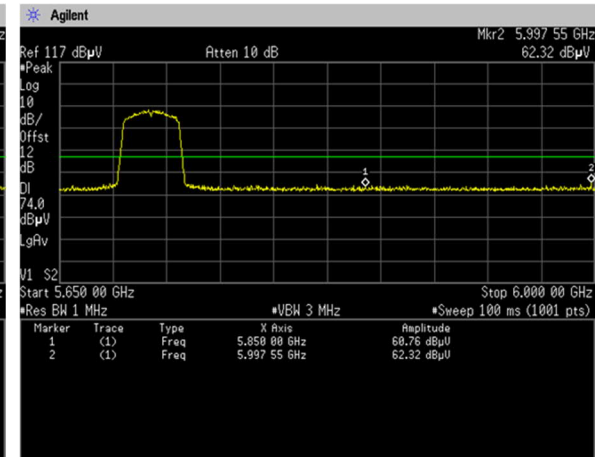


[IEEE802.11ac (VHT80)]


5.6GHz Band, Channel High (122)

Peak

Horizontal

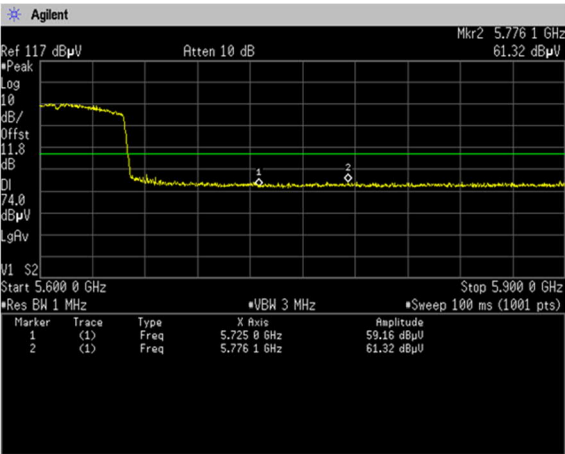


Vertical

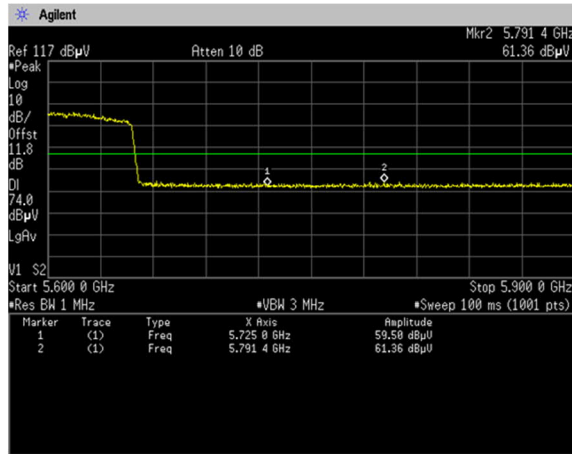


5.6GHz Band, Channel High (138)

Peak

Horizontal

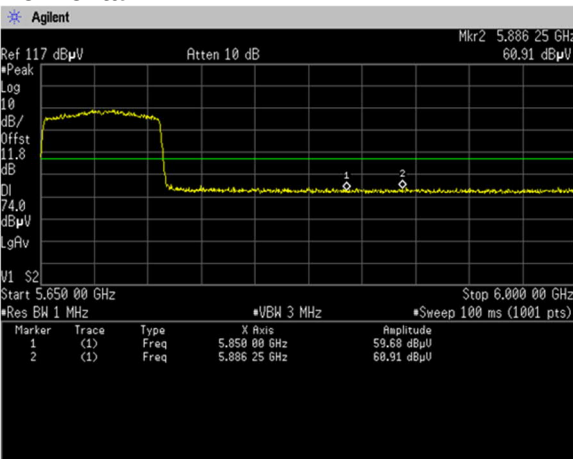

Vertical

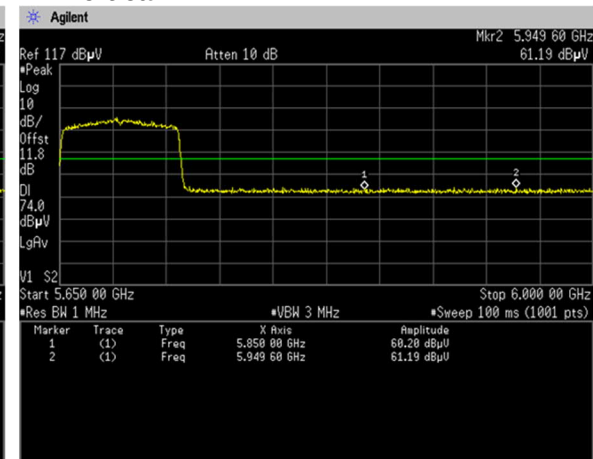

**4.4.4.3 Radiated Emissions**

|             |                            |               |                       |
|-------------|----------------------------|---------------|-----------------------|
| Date        | : 8-November-2021          |               |                       |
| Temperature | : 22.1 [°C]                |               |                       |
| Humidity    | : 31.5 [%]                 | Test engineer | :                     |
| Test place  | : 3m Semi-anechoic chamber |               | <u>Tadahiro Seino</u> |
| Date        | : 9-10-November-2021       |               |                       |
| Temperature | : 23.5 [°C]                |               |                       |
| Humidity    | : 47.7 [%]                 | Test engineer | :                     |
| Test place  | : 3m Semi-anechoic chamber |               | <u>Chiaki Kanno</u>   |
| Date        | : 11-November-2021         |               |                       |
| Temperature | : 22.6 [°C]                |               |                       |
| Humidity    | : 31.3 [%]                 | Test engineer | :                     |
| Test place  | : 3m Semi-anechoic chamber |               | <u>Kazunori Saito</u> |
| Date        | : 12-November-2021         |               |                       |
| Temperature | : 24.4 [°C]                |               |                       |
| Humidity    | : 30.5 [%]                 | Test engineer | :                     |
| Test place  | : 3m Semi-anechoic chamber |               | <u>Tadahiro Seino</u> |
| Date        | : 16-November-2021         |               |                       |
| Temperature | : 22.1 [°C]                |               |                       |
| Humidity    | : 36.9 [%]                 | Test engineer | :                     |
| Test place  | : 3m Semi-anechoic chamber |               | <u>Tadahiro Seino</u> |

**[IEEE802.11a]  
(5.2 GHz Band)**

| Mode    | Channel | Frequency (MHz) | Frequency (MHz) | ANT H/V | Detector PK/AV | Reading (dBμV) | C.F (dB) | DCF (dB) | Result (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
|---------|---------|-----------------|-----------------|---------|----------------|----------------|----------|----------|-----------------|----------------|-------------|
| 802.11a | 36      | 5180            | 10360.00        | H       | PK             | 45.6           | 11.2     |          | 56.8            | 68.2           | 11.4        |
|         | 40      | 5200            | 10400.00        | H       | PK             | 44.6           | 11.3     |          | 55.9            | 68.2           | 12.3        |
|         | 48      | 5240            | 10480.00        | H       | PK             | 44.5           | 11.4     |          | 55.9            | 68.2           | 12.3        |

**(5.3 GHz Band)**

| Mode    | Channel | Frequency (MHz) | Frequency (MHz) | ANT H/V | Detector PK/AV | Reading (dBμV) | C.F (dB) | DCF (dB) | Result (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
|---------|---------|-----------------|-----------------|---------|----------------|----------------|----------|----------|-----------------|----------------|-------------|
| 802.11a | 52      | 5260            | 10520.00        | H       | PK             | 45.2           | 11.5     |          | 56.7            | 68.2           | 11.5        |
|         | 56      | 5280            | 10560.00        | H       | PK             | 45.4           | 11.5     |          | 56.9            | 68.2           | 11.3        |
|         | 64      | 5320            | 10640.00        | H       | PK             | 46.0           | 11.7     |          | 57.7            | 74.0           | 16.3        |
|         |         |                 | 10640.00        | H       | AV             | 32.1           | 11.7     | 0.141    | 43.9            | 54.0           | 10.1        |

**(5.6 GHz Band)**

| Mode    | Channel | Frequency (MHz) | Frequency (MHz) | ANT H/V | Detector PK/AV | Reading (dBμV) | C.F (dB) | DCF (dB) | Result (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
|---------|---------|-----------------|-----------------|---------|----------------|----------------|----------|----------|-----------------|----------------|-------------|
| 802.11a | 100     | 5500            | 5465.30         | H       | PK             | 48.9           | 11.8     |          | 60.7            | 68.2           | 7.5         |
|         |         |                 | 5467.60         | V       | PK             | 49.3           | 11.8     |          | 61.1            | 68.2           | 7.1         |
|         |         |                 | 11000.00        | H       | PK             | 45.3           | 12.3     |          | 57.6            | 74.0           | 16.4        |
|         |         |                 | 11000.00        | H       | AV             | 31.7           | 12.3     | 0.135    | 44.1            | 54.0           | 9.9         |
|         | 116     | 5580            | 11160.00        | H       | PK             | 45.3           | 12.3     |          | 57.6            | 74.0           | 16.4        |
|         |         |                 | 11160.00        | H       | AV             | 32.0           | 12.3     | 0.135    | 44.4            | 54.0           | 9.6         |
|         | 140     | 5700            | 11400.00        | H       | PK             | 46.1           | 12.5     |          | 58.6            | 74.0           | 15.4        |
|         |         |                 | 11400.00        | H       | AV             | 31.0           | 12.5     | 0.135    | 43.6            | 54.0           | 10.4        |
|         | 144     | 5720            | 11440.00        | H       | PK             | 46.0           | 12.5     |          | 58.5            | 74.0           | 15.5        |
|         |         |                 | 11440.00        | H       | AV             | 30.8           | 12.5     | 0.135    | 43.4            | 54.0           | 10.6        |

Note:

1. Emission Level (Margin) = Limit - [Reading + C.F ( Antenna + Cable – Amp)]
2. No emission were detected in frequency range 30 MHz to 1000 MHz at the 3 meters distance.
3. No emission was detected in the receive mode.

**[IEEE802.11n (HT20)]**  
**(5.2 GHz Band)**

| Mode            | Channel | Frequency (MHz) | Frequency (MHz) | ANT H/V | Detector PK/AV | Reading (dBμV) | C.F (dB) | DCF (dB) | Result (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
|-----------------|---------|-----------------|-----------------|---------|----------------|----------------|----------|----------|-----------------|----------------|-------------|
| 802.11n (20MHz) | 36      | 5180            | 10360.00        | V       | PK             | 46.0           | 11.2     |          | 57.2            | 68.2           | 11.0        |
|                 | 40      | 5200            | 10400.00        | V       | PK             | 46.3           | 11.3     |          | 57.6            | 68.2           | 10.6        |
|                 | 48      | 5240            | 10480.00        | V       | PK             | 45.9           | 11.4     |          | 57.3            | 68.2           | 10.9        |

**(5.3 GHz Band)**

| Mode            | Channel | Frequency (MHz) | Frequency (MHz) | ANT H/V | Detector PK/AV | Reading (dBμV) | C.F (dB) | DCF (dB) | Result (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
|-----------------|---------|-----------------|-----------------|---------|----------------|----------------|----------|----------|-----------------|----------------|-------------|
| 802.11n (20MHz) | 52      | 5260            | 10520.00        | V       | PK             | 46.0           | 11.5     |          | 57.5            | 68.2           | 10.7        |
|                 | 56      | 5280            | 10560.00        | V       | PK             | 46.2           | 11.5     |          | 57.7            | 68.2           | 10.5        |
|                 | 64      | 5320            | 10640.00        | V       | PK             | 46.7           | 11.7     |          | 58.4            | 74.0           | 15.6        |
|                 |         |                 | 10640.00        | V       | AV             | 32.1           | 11.7     | 0.146    | 43.9            | 54.0           | 10.1        |

**(5.6 GHz Band)**

| Mode            | Channel | Frequency (MHz) | Frequency (MHz) | ANT H/V | Detector PK/AV | Reading (dBμV) | C.F (dB) | DCF (dB) | Result (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
|-----------------|---------|-----------------|-----------------|---------|----------------|----------------|----------|----------|-----------------|----------------|-------------|
| 802.11n (20MHz) | 100     | 5500            | 5468.98         | H       | PK             | 50.5           | 11.8     |          | 62.3            | 68.2           | 5.9         |
|                 |         |                 | 5467.01         | V       | PK             | 50.0           | 11.8     |          | 61.8            | 68.2           | 6.4         |
|                 |         |                 | 11000.00        | V       | PK             | 46.0           | 12.3     |          | 58.3            | 74.0           | 15.7        |
|                 |         |                 | 11000.00        | V       | AV             | 30.8           | 12.3     | 0.152    | 43.3            | 54.0           | 10.7        |
|                 | 116     | 5580            | 11160.00        | V       | PK             | 45.8           | 12.3     |          | 58.1            | 74.0           | 15.9        |
|                 |         |                 | 11160.00        | V       | AV             | 31.3           | 12.3     | 0.152    | 43.8            | 54.0           | 10.2        |
|                 |         |                 | 11400.00        | V       | PK             | 46.1           | 12.5     |          | 58.6            | 74.0           | 15.4        |
|                 | 140     | 5700            | 11400.00        | V       | AV             | 31.1           | 12.5     | 0.152    | 43.8            | 54.0           | 10.2        |
|                 |         |                 | 11440.00        | V       | PK             | 46.2           | 12.5     |          | 58.7            | 74.0           | 15.3        |
|                 | 144     | 5720            | 11440.00        | V       | AV             | 31.1           | 12.5     | 0.152    | 43.8            | 54.0           | 10.2        |
|                 |         |                 | 11440.00        | V       | AV             | 31.1           | 12.5     | 0.152    | 43.8            | 54.0           | 10.2        |

Note:

1. Emission Level (Margin) = Limit - [Reading + C.F ( Antenna + Cable – Amp)]
2. No emission were detected in frequency range 30 MHz to 1000 MHz at the 3 meters distance.
3. No emission was detected in the receive mode.

**[IEEE802.11n (HT40)]****(5.2 GHz Band)**

| Mode            | Channel | Frequency (MHz) | Frequency (MHz) | ANT H/V | Detector PK/AV | Reading (dBμV) | C.F (dB) | DCF (dB) | Result (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
|-----------------|---------|-----------------|-----------------|---------|----------------|----------------|----------|----------|-----------------|----------------|-------------|
| 802.11n (40MHz) | 38      | 5190            | 10380.00        | H       | PK             | 46.2           | 11.2     |          | 57.4            | 68.2           | 10.8        |
|                 | 46      | 5230            | 10460.00        | H       | PK             | 45.9           | 11.4     |          | 57.3            | 68.2           | 10.9        |

**(5.3 GHz Band)**

| Mode            | Channel | Frequency (MHz) | Frequency (MHz) | ANT H/V | Detector PK/AV | Reading (dBμV) | C.F (dB) | DCF (dB) | Result (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
|-----------------|---------|-----------------|-----------------|---------|----------------|----------------|----------|----------|-----------------|----------------|-------------|
| 802.11n (40MHz) | 54      | 5270            | 10540.00        | H       | PK             | 46.2           | 11.5     |          | 57.7            | 68.2           | 10.5        |
|                 | 62      | 5310            | 10620.00        | H       | PK             | 46.9           | 11.7     |          | 58.6            | 74.0           | 15.4        |
|                 |         |                 | 10620.00        | H       | AV             | 31.9           | 11.7     | 0.291    | 43.9            | 54.0           | 10.1        |

**(5.6 GHz Band)**

| Mode            | Channel | Frequency (MHz) | Frequency (MHz) | ANT H/V | Detector PK/AV | Reading (dBμV) | C.F (dB) | DCF (dB) | Result (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
|-----------------|---------|-----------------|-----------------|---------|----------------|----------------|----------|----------|-----------------|----------------|-------------|
| 802.11n (40MHz) | 102     | 5510            | 5466.40         | H       | PK             | 49.8           | 11.8     |          | 61.6            | 68.2           | 6.6         |
|                 |         |                 | 5467.60         | V       | PK             | 49.6           | 11.8     |          | 61.4            | 68.2           | 6.8         |
|                 |         |                 | 11020.00        | H       | PK             | 45.8           | 12.3     |          | 58.1            | 74.0           | 15.9        |
|                 |         |                 | 11020.00        | H       | AV             | 32.0           | 12.3     | 0.304    | 44.6            | 54.0           | 9.4         |
|                 | 110     | 5550            | 11100.00        | H       | PK             | 46.3           | 12.3     |          | 58.6            | 74.0           | 15.4        |
|                 |         |                 | 11100.00        | H       | AV             | 31.8           | 12.3     | 0.304    | 44.4            | 54.0           | 9.6         |
|                 |         |                 | 11340.00        | H       | PK             | 46.4           | 12.4     |          | 58.8            | 74.0           | 15.2        |
|                 | 134     | 5670            | 11340.00        | H       | AV             | 31.4           | 12.4     | 0.304    | 44.1            | 54.0           | 9.9         |
|                 |         |                 | 11420.00        | H       | PK             | 46.0           | 12.5     |          | 58.5            | 74.0           | 15.5        |
|                 | 142     | 5710            | 11420.00        | H       | PK             | 46.0           | 12.5     |          | 58.5            | 74.0           | 15.5        |
|                 |         |                 | 11420.00        | H       | AV             | 31.0           | 12.5     | 0.304    | 43.8            | 54.0           | 10.2        |

Note:

1. Emission Level (Margin) = Limit - [Reading + C.F ( Antenna + Cable – Amp)]
2. No emission were detected in frequency range 30 MHz to 1000 MHz at the 3 meters distance.
3. No emission was detected in the receive mode.

**[IEEE802.11ac (VHT80)]****(5.2 GHz Band)**

| Mode             | Channel | Frequency (MHz) | Frequency (MHz) | ANT H/V | Detector PK/AV | Reading (dBμV) | C.F (dB) | DCF (dB) | Result (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
|------------------|---------|-----------------|-----------------|---------|----------------|----------------|----------|----------|-----------------|----------------|-------------|
| 802.11ac (80MHz) | 42      | 5210            | 10420.00        | H       | PK             | 45.7           | 11.3     |          | 57.0            | 68.2           | 11.2        |

**(5.3 GHz Band)**

| Mode             | Channel | Frequency (MHz) | Frequency (MHz) | ANT H/V | Detector PK/AV | Reading (dBμV) | C.F (dB) | DCF (dB) | Result (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
|------------------|---------|-----------------|-----------------|---------|----------------|----------------|----------|----------|-----------------|----------------|-------------|
| 802.11ac (80MHz) | 58      | 5290            | 10580.00        | H       | PK             | 46.7           | 11.6     |          | 58.3            | 68.2           | 9.9         |

**(5.6 GHz Band)**

| Mode             | Channel | Frequency (MHz) | Frequency (MHz) | ANT H/V | Detector PK/AV | Reading (dBμV) | C.F (dB) | DCF (dB) | Result (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
|------------------|---------|-----------------|-----------------|---------|----------------|----------------|----------|----------|-----------------|----------------|-------------|
| 802.11ac (80MHz) | 106     | 5530            | 5461.20         | H       | PK             | 50.6           | 11.8     |          | 62.4            | 68.2           | 5.8         |
|                  |         |                 | 5469.10         | V       | PK             | 50.3           | 11.8     |          | 62.1            | 68.2           | 6.1         |
|                  |         |                 | 11060.00        | H       | PK             | 46.4           | 12.3     |          | 58.7            | 74.0           | 15.3        |
|                  |         |                 | 11060.00        | H       | AV             | 32.1           | 12.3     | 0.558    | 45.0            | 54.0           | 9.0         |
|                  | 122     | 5610            | 11220.00        | H       | PK             | 46.1           | 12.4     |          | 58.5            | 74.0           | 15.5        |
|                  |         |                 | 11220.00        | H       | AV             | 31.7           | 12.4     | 0.556    | 44.7            | 54.0           | 9.3         |
|                  | 138     | 5690            | 11380.00        | H       | PK             | 46.0           | 12.5     |          | 58.5            | 74.0           | 15.5        |
|                  |         |                 | 11380.00        | H       | AV             | 31.3           | 12.5     | 0.564    | 44.4            | 54.0           | 9.6         |


Note:

1. Emission Level (Margin) = Limit - [Reading + C.F ( Antenna + Cable – Amp)]
2. No emission were detected in frequency range 30 MHz to 1000 MHz at the 3 meters distance.
3. No emission was detected in the receive mode.

## 4.4.4.4 Measurement chart

## Transmission mode

[11a]

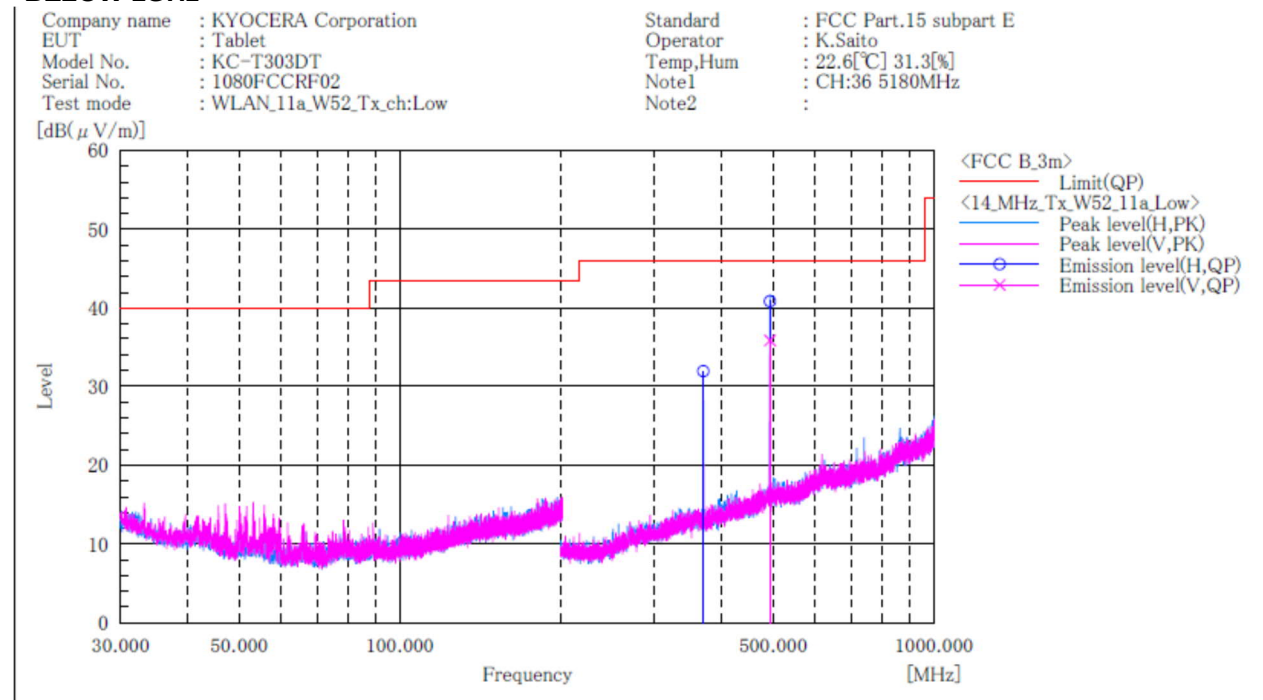
W52 / Channel Low  
BELOW 1GHz

## Final Result

| No. | Frequency [MHz] | (P) | Reading QP [dB(μV)] | c.f [dB(1/m)] | Result QP [dB(μV/m)] | Limit QP [dB(μV/m)] | Margin QP [dB] | Height [cm] | Angle [°] | Remark |
|-----|-----------------|-----|---------------------|---------------|----------------------|---------------------|----------------|-------------|-----------|--------|
| 1   | 369.744         | H   | 44.1                | -12.2         | 31.9                 | 46.0                | 14.1           | 100.0       | 88.0      |        |
| 2   | 493.001         | H   | 50.1                | -9.2          | 40.9                 | 46.0                | 5.1            | 193.0       | 33.0      |        |
| 3   | 493.001         | V   | 45.0                | -9.2          | 35.8                 | 46.0                | 10.2           | 207.0       | 328.0     |        |

Note:

1. Emission Level (Margin) = Limit - [Reading + Factor ( Antenna + Cable – Amp)]

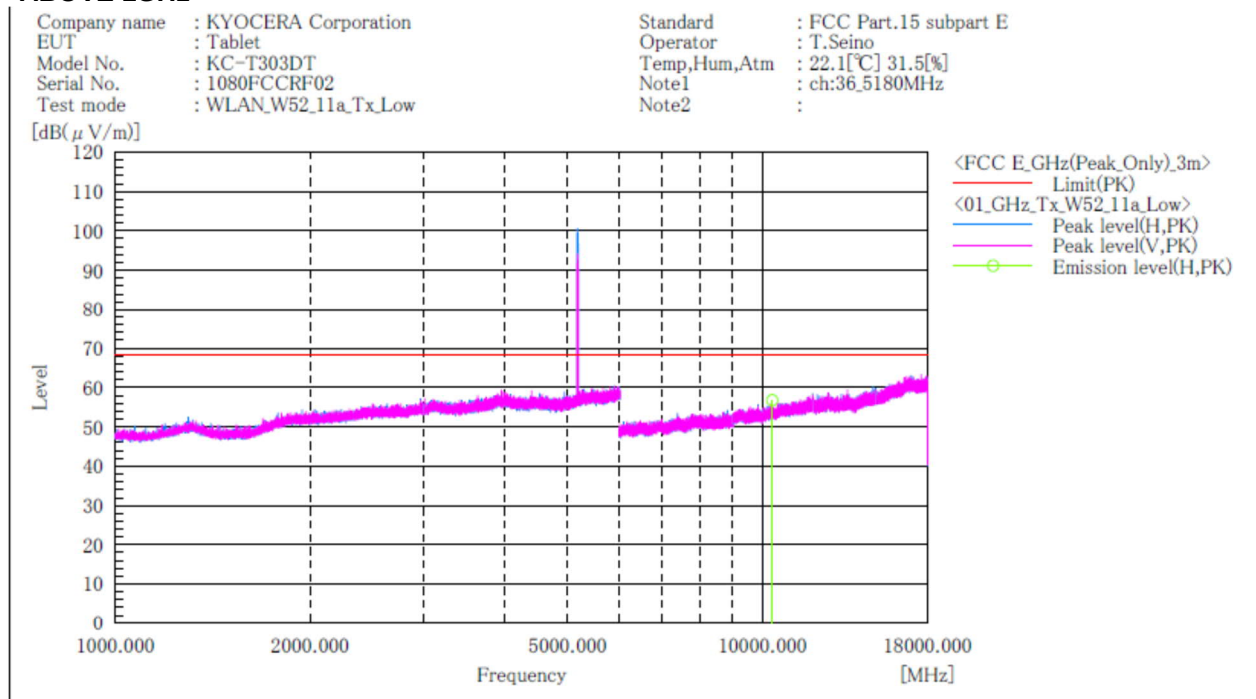**[11a]****W52 / Channel Low  
ABOVE 1GHz****Final Result**

| No. | Frequency | (P) | Reading        | c.f       | Result           | Limit            | Margin     | Height | Angle | Remark |
|-----|-----------|-----|----------------|-----------|------------------|------------------|------------|--------|-------|--------|
|     | [MHz]     |     | PK<br>[dB(μV)] | [dB(1/m)] | PK<br>[dB(μV/m)] | PK<br>[dB(μV/m)] | PK<br>[dB] | [cm]   | [°]   |        |
| 1   | 10360.000 | H   | 45.6           | 11.2      | 56.8             | 68.2             | 11.4       | 100.0  | 67.0  |        |


**Note:**

- Emission Level (Margin) = Limit - [Reading + Factor ( Antenna + Cable – Amp)]
- No emission were detected in frequency range 18GHz to 40GHz at the 3 meters distance.

**[11a]**  
**W52 / Channel Middle**  
**BELOW 1GHz**

Company name : KYOCERA Corporation  
 EUT : Tablet  
 Model No. : KC-T303DT  
 Serial No. : 1080FCCR02  
 Test mode : WLAN\_11a\_W52\_Tx\_ch:Mid

Standard : FCC Part.15 subpart E  
 Operator : K.Saito  
 Temp,Hum : 22.6[°C] 31.3[%]  
 Note1 : CH:40 5200MHz  
 Note2 :

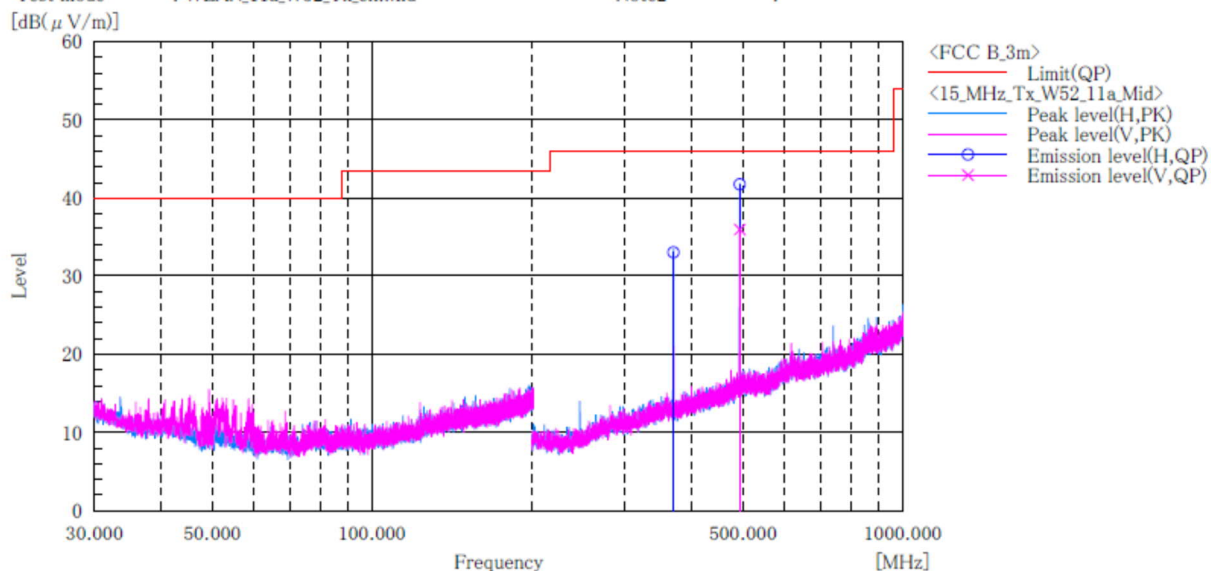


**Final Result**

| No. | Frequency [MHz] | (P) | Reading QP [dB(μV)] | c.f [dB(1/m)] | Result QP [dB(μV/m)] | Limit QP [dB(μV/m)] | Margin QP [dB] | Height [cm] | Angle [°] | Remark |
|-----|-----------------|-----|---------------------|---------------|----------------------|---------------------|----------------|-------------|-----------|--------|
| 1   | 369.750         | H   | 45.2                | -12.2         | 33.0                 | 46.0                | 13.0           | 100.0       | 237.0     |        |
| 2   | 493.001         | H   | 51.0                | -9.2          | 41.8                 | 46.0                | 4.2            | 203.0       | 265.0     |        |
| 3   | 493.001         | V   | 45.1                | -9.2          | 35.9                 | 46.0                | 10.1           | 210.0       | 340.0     |        |

**Note:**

1. Emission Level (Margin) = Limit - [Reading + Factor ( Antenna + Cable - Amp)]

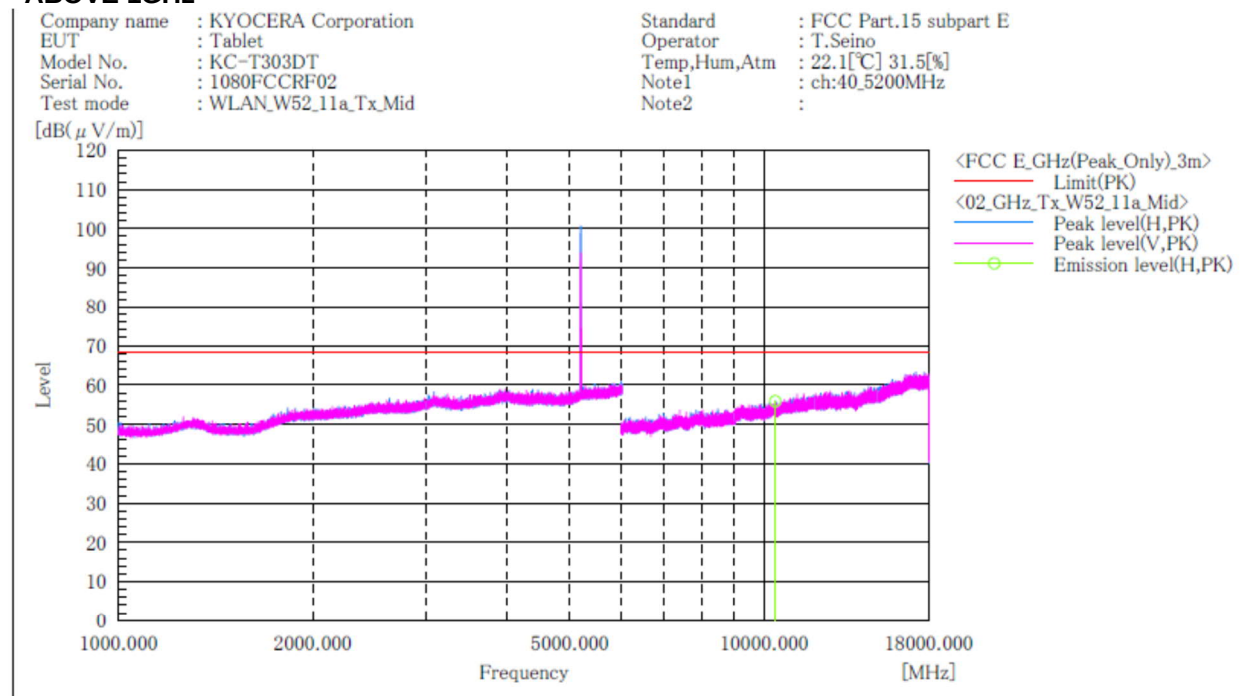**[11a]****W52 / Channel Middle  
ABOVE 1GHz****Final Result**

| No. | Frequency [MHz] | (P) | Reading PK [dB(μV)] | c. f [dB(1/m)] | Result PK [dB(μV/m)] | Limit PK [dB(μV/m)] | Margin PK [dB] | Height [cm] | Angle [°] | Remark |
|-----|-----------------|-----|---------------------|----------------|----------------------|---------------------|----------------|-------------|-----------|--------|
| 1   | 10400.000       | H   | 44.6                | 11.3           | 55.9                 | 68.2                | 12.3           | 100.0       | 69.0      |        |


**Note:**

- Emission Level (Margin) = Limit - [Reading + Factor ( Antenna + Cable – Amp)]
- No emission were detected in frequency range 18GHz to 40GHz at the 3 meters distance.

**[11a]**  
**W52 / Channel High**  
**BELOW 1GHz**

Company name : KYOCERA Corporation  
 EUT : Tablet  
 Model No. : KC-T303DT  
 Serial No. : 1080FCCRF02  
 Test mode : WLAN\_11a\_W52\_Tx\_ch:High

Standard : FCC Part.15 subpart E  
 Operator : K.Saito  
 Temp,Hum : 22.6[°C] 31.3[%]  
 Note1 : CH:48 5240MHz  
 Note2 :

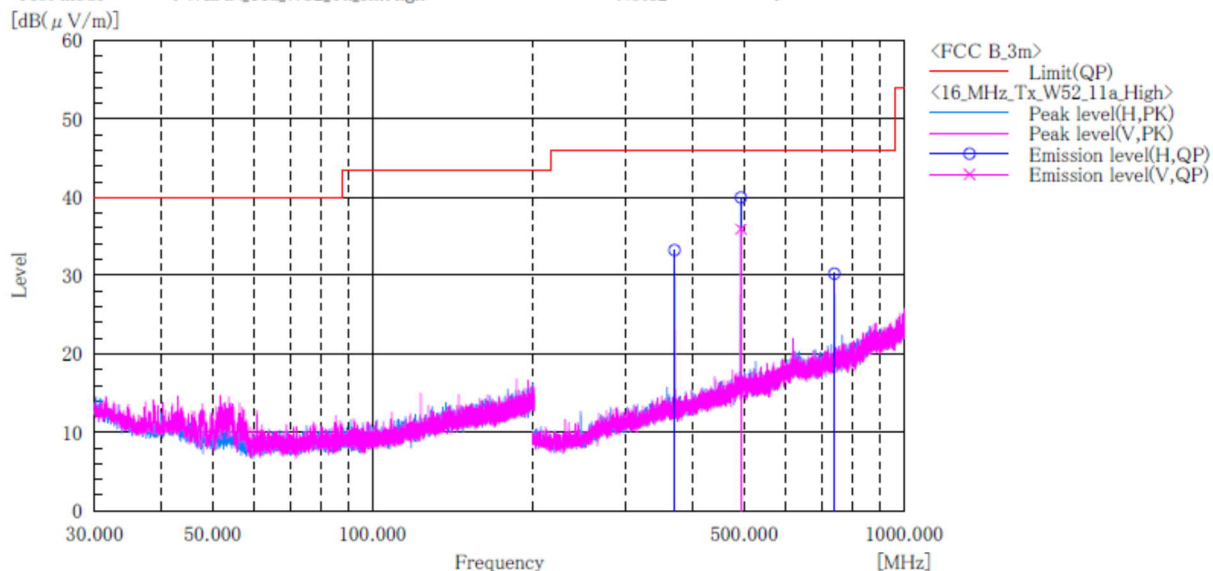

**Final Result**

| No. | Frequency [MHz] | (P) | Reading QP [dB(μV)] | c. f [dB(1/m)] | Result QP [dB(μV/m)] | Limit QP [dB(μV/m)] | Margin QP [dB] | Height [cm] | Angle [°] | Remark |
|-----|-----------------|-----|---------------------|----------------|----------------------|---------------------|----------------|-------------|-----------|--------|
| 1   | 369.753         | H   | 45.4                | -12.2          | 33.2                 | 46.0                | 12.8           | 100.0       | 248.0     |        |
| 2   | 493.001         | H   | 49.2                | -9.2           | 40.0                 | 46.0                | 6.0            | 190.0       | 40.0      |        |
| 3   | 493.001         | V   | 45.1                | -9.2           | 35.9                 | 46.0                | 10.1           | 209.0       | 331.0     |        |
| 4   | 739.488         | H   | 36.2                | -6.0           | 30.2                 | 46.0                | 15.8           | 129.0       | 281.0     |        |

**Note:**


1. Emission Level (Margin) = Limit - [Reading + Factor ( Antenna + Cable – Amp)]

## [11a]

W52 / Channel High  
ABOVE 1GHz

Company name : KYOCERA Corporation  
EUT : Tablet  
Model No. : KC-T303DT  
Serial No. : 1080FCCR02  
Test mode : WLAN\_W52\_11a\_Tx\_High

Standard : FCC Part.15 subpart E  
Operator : T.Seino  
Temp,Hum,Atm : 22.1[°C] 31.5[%]  
Note1 : ch:48\_5240MHz  
Note2 :

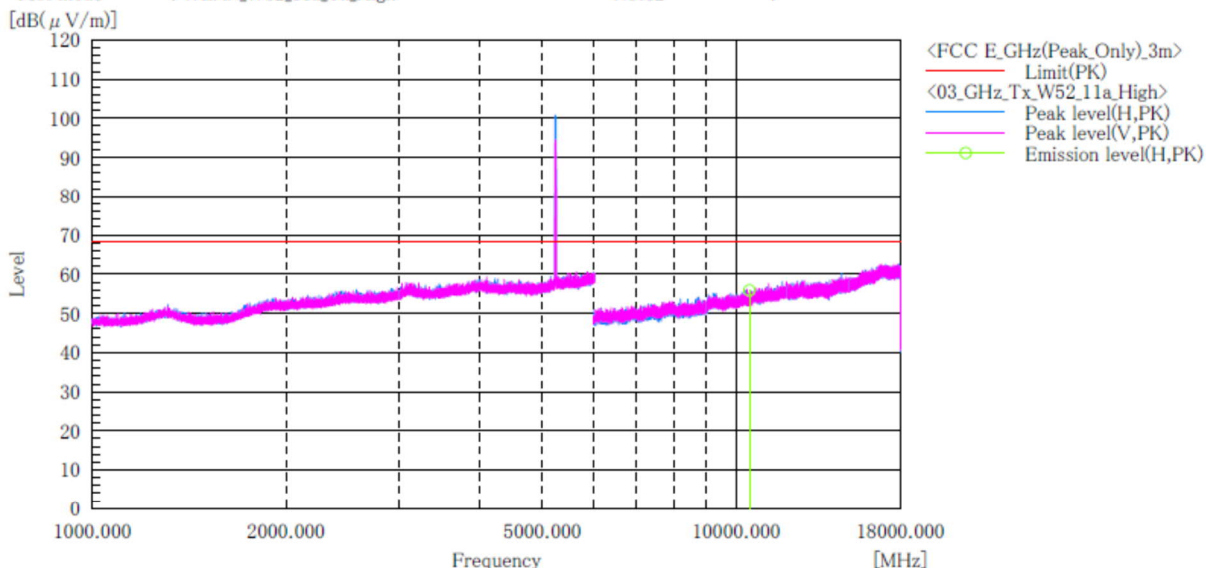

## Final Result

| No. | Frequency [MHz] | (P) | Reading PK [dB(μV)] | c.f [dB(1/m)] | Result PK [dB(μV/m)] | Limit PK [dB(μV/m)] | Margin PK [dB] | Height [cm] | Angle [°] | Remark |
|-----|-----------------|-----|---------------------|---------------|----------------------|---------------------|----------------|-------------|-----------|--------|
| 1   | 10480.000       | H   | 44.5                | 11.4          | 55.9                 | 68.2                | 12.3           | 100.0       | 83.0      |        |

## Note:


- Emission Level (Margin) = Limit - [Reading + Factor ( Antenna + Cable – Amp)]
- No emission were detected in frequency range 18GHz to 40GHz at the 3 meters distance.

**[11a]****W53 / Channel Low  
BELOW 1GHz**

Company name : KYOCERA Corporation  
 EUT : Tablet  
 Model No. : KC-T303DT  
 Serial No. : 1080FCCR02  
 Test mode : WLAN\_11a\_W52\_Tx\_ch:High

Standard : FCC Part.15 subpart E  
 Operator : K.Saito  
 Temp,Hum : 22.6[°C] 31.3[%]  
 Note1 : CH:52 5260MHz  
 Note2 :

[dB(μV/m)]

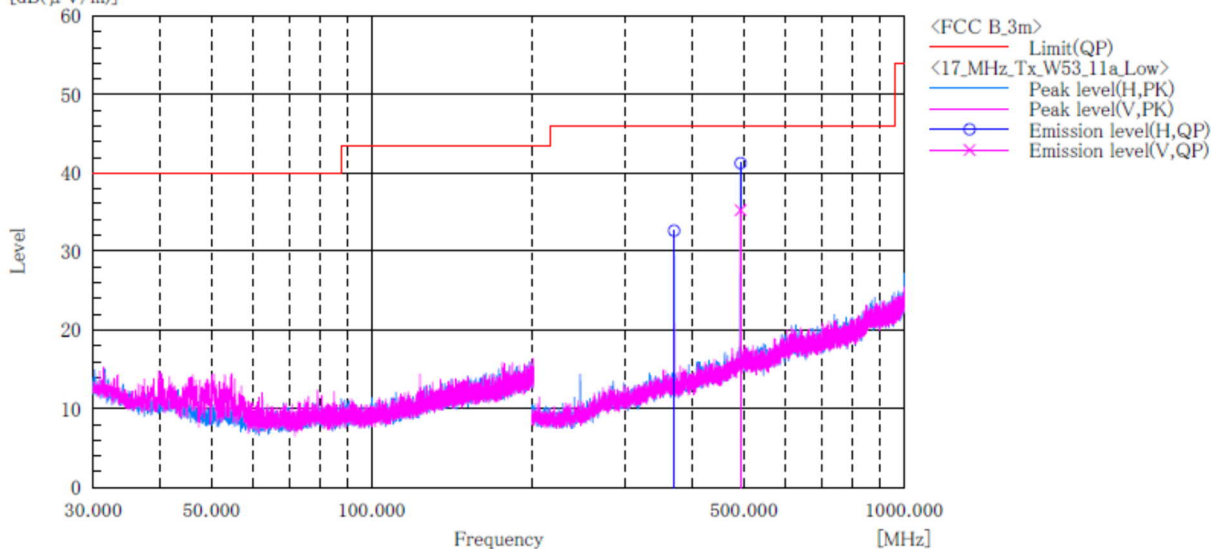**Final Result**

| No. | Frequency [MHz] | (P) | Reading QP [dB(μV)] | c.f [dB(1/m)] | Result QP [dB(μV/m)] | Limit QP [dB(μV/m)] | Margin QP [dB] | Height [cm] | Angle [°] | Remark |
|-----|-----------------|-----|---------------------|---------------|----------------------|---------------------|----------------|-------------|-----------|--------|
| 1   | 369.759         | H   | 44.8                | -12.2         | 32.6                 | 46.0                | 13.4           | 100.0       | 246.0     |        |
| 2   | 493.001         | H   | 50.5                | -9.2          | 41.3                 | 46.0                | 4.7            | 198.0       | 262.0     |        |
| 3   | 493.001         | V   | 44.4                | -9.2          | 35.2                 | 46.0                | 10.8           | 202.0       | 344.0     |        |

**Note:**

1. Emission Level (Margin) = Limit - [Reading + Factor ( Antenna + Cable - Amp)]

## [11a]


## W53 / Channel Low

## ABOVE 1GHz

Company name : KYOCERA Corporation  
 EUT : Tablet  
 Model No. : KC-T303DT  
 Serial No. : 1080FCCRF02  
 Test mode : WLAN\_W53\_11a\_Tx\_Low

Standard : FCC Part.15 subpart E  
 Operator : T.Seino  
 Temp,Hum,Atm : 22.1[°C] 31.5[%]  
 Note1 : ch:52\_5260MHz  
 Note2 :

[dB(μV/m)]

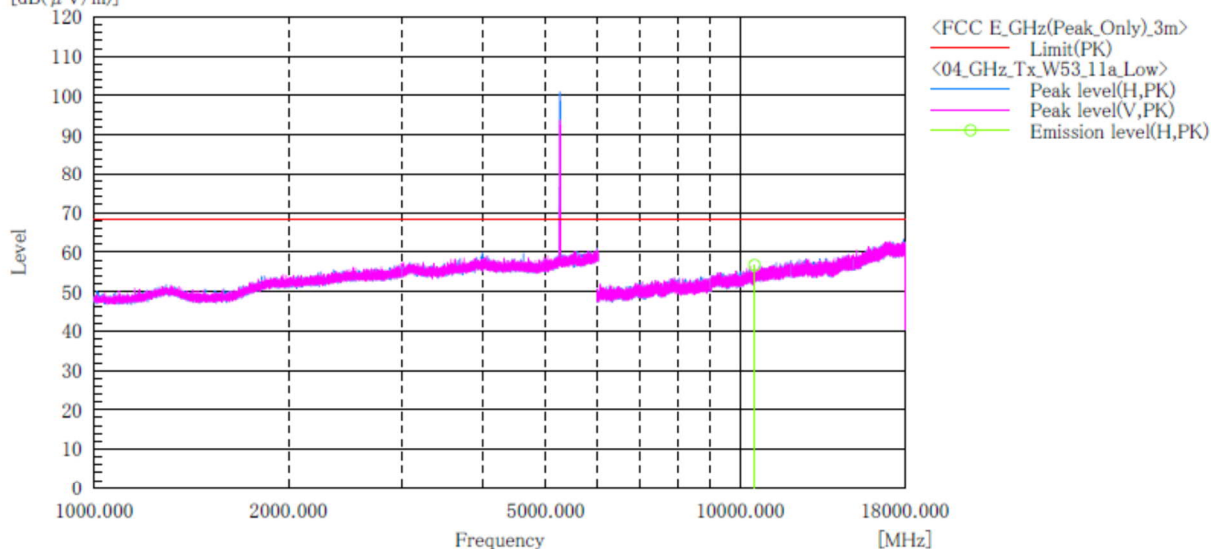


## Final Result

| No. | Frequency [MHz] | (P) | Reading PK [dB(μV)] | c.f [dB(1/m)] | Result PK [dB(μV/m)] | Limit PK [dB(μV/m)] | Margin PK [dB] | Height [cm] | Angle [°] | Remark |
|-----|-----------------|-----|---------------------|---------------|----------------------|---------------------|----------------|-------------|-----------|--------|
| 1   | 10520.000       | H   | 45.2                | 11.5          | 56.7                 | 68.2                | 11.5           | 100.0       | 82.0      |        |

## Note:

- Emission Level (Margin) = Limit - [Reading + Factor ( Antenna + Cable – Amp)]
- No emission were detected in frequency range 18GHz to 40GHz at the 3 meters distance.

**[11a]**  
**W53 / Channel Middle**  
**BELOW 1GHz**

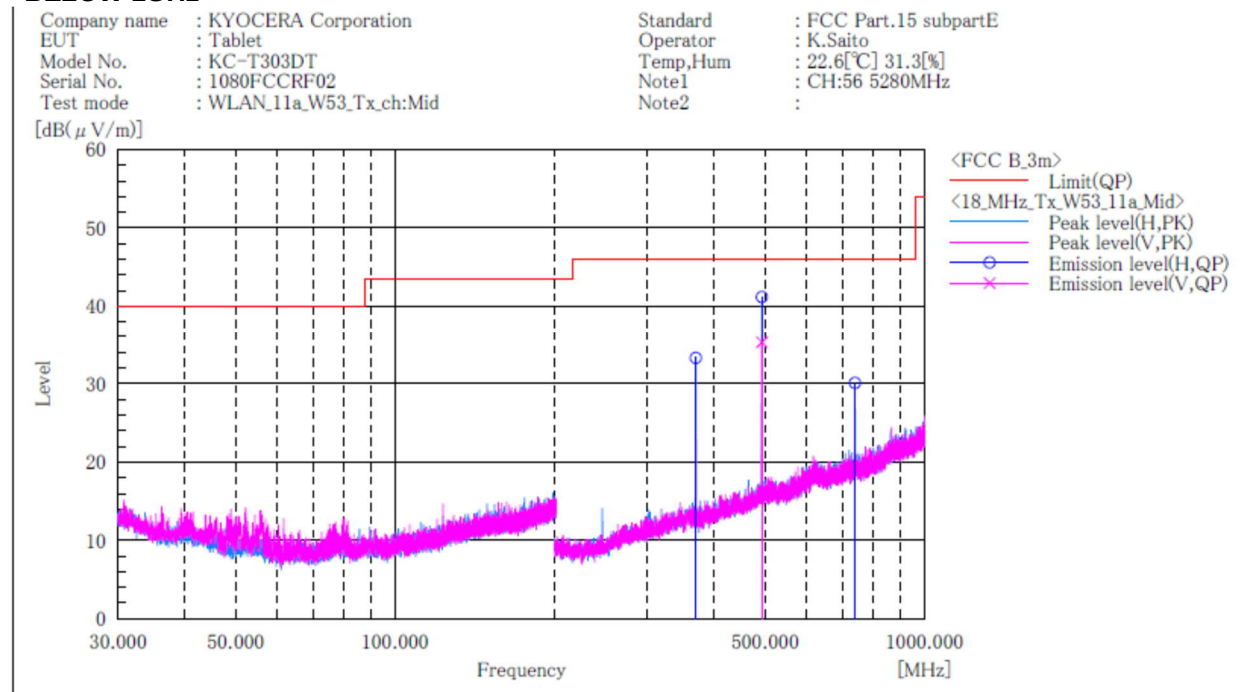


**Final Result**

| No. | Frequency [MHz] | (P) | Reading QP [dB(μV)] | c. f [dB(1/m)] | Result QP [dB(μV/m)] | Limit QP [dB(μV/m)] | Margin QP [dB] | Height [cm] | Angle [°] | Remark |
|-----|-----------------|-----|---------------------|----------------|----------------------|---------------------|----------------|-------------|-----------|--------|
| 1   | 369.749         | H   | 45.5                | -12.2          | 33.3                 | 46.0                | 12.7           | 100.0       | 87.0      |        |
| 2   | 493.001         | H   | 50.4                | -9.2           | 41.2                 | 46.0                | 4.8            | 205.0       | 260.0     |        |
| 3   | 493.001         | V   | 44.5                | -9.2           | 35.3                 | 46.0                | 10.7           | 212.0       | 329.0     |        |
| 4   | 739.508         | H   | 36.1                | -6.0           | 30.1                 | 46.0                | 15.9           | 116.0       | 293.0     |        |

**Note:**

1. Emission Level (Margin) = Limit - [Reading + Factor ( Antenna + Cable – Amp)]

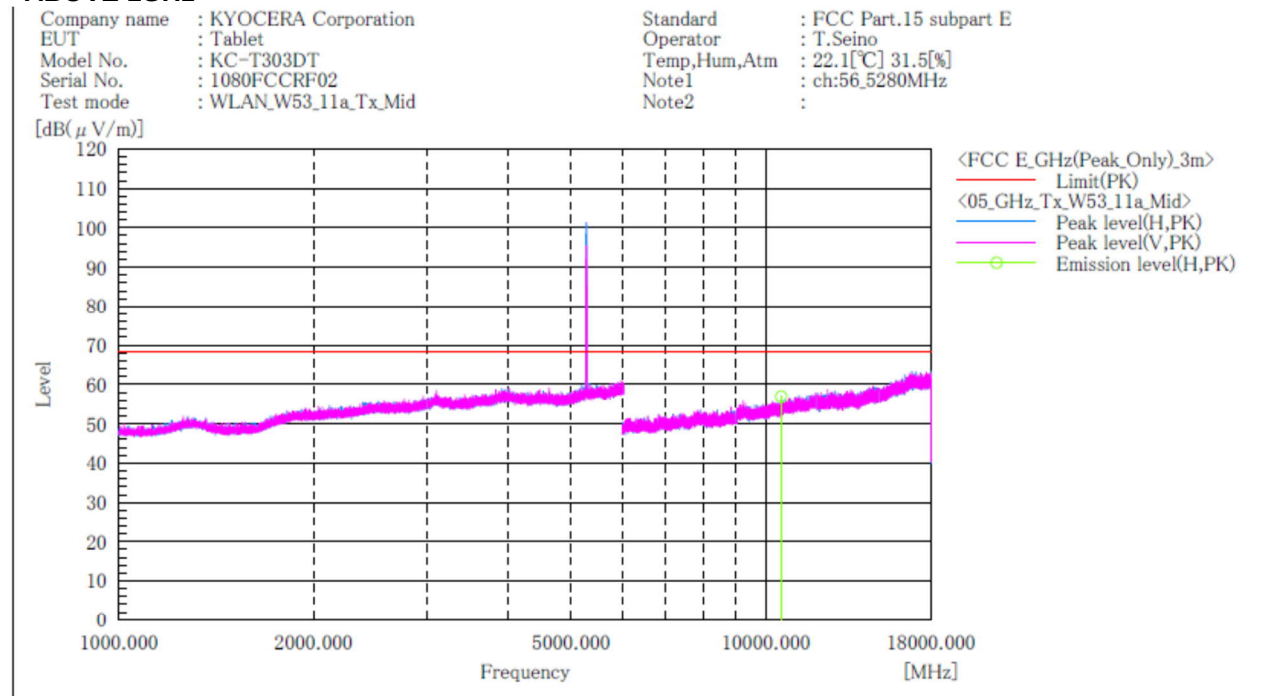**[11a]****W53 / Channel Middle  
ABOVE 1GHz****Final Result**

| No. | Frequency | (P) | Reading        | c.f       | Result           | Limit            | Margin     | Height | Angle | Remark |
|-----|-----------|-----|----------------|-----------|------------------|------------------|------------|--------|-------|--------|
|     | [MHz]     |     | PK<br>[dB(μV)] | [dB(1/m)] | PK<br>[dB(μV/m)] | PK<br>[dB(μV/m)] | PK<br>[dB] | [cm]   | [°]   |        |
| 1   | 10560.000 | H   | 45.4           | 11.5      | 56.9             | 68.2             | 11.3       | 100.0  | 79.0  |        |

**Note:**


1. Emission Level (Margin) = Limit - [Reading + Factor ( Antenna + Cable – Amp)]
2. No emission were detected in frequency range 18GHz to 40GHz at the 3 meters distance.

## [11a]

W53 / Channel High  
BELOW 1GHz

Company name : KYOCERA Corporation  
EUT : Tablet  
Model No. : KC-T303DT  
Serial No. : 1080FCCR02  
Test mode : WLAN\_11a\_W53\_Tx\_ch:High

Standard : FCC Part.15 subpart E  
Operator : K.Saito  
Temp,Hum : 22.6[°C] 31.3[%]  
Note1 : CH:64 5320MHz  
Note2 :

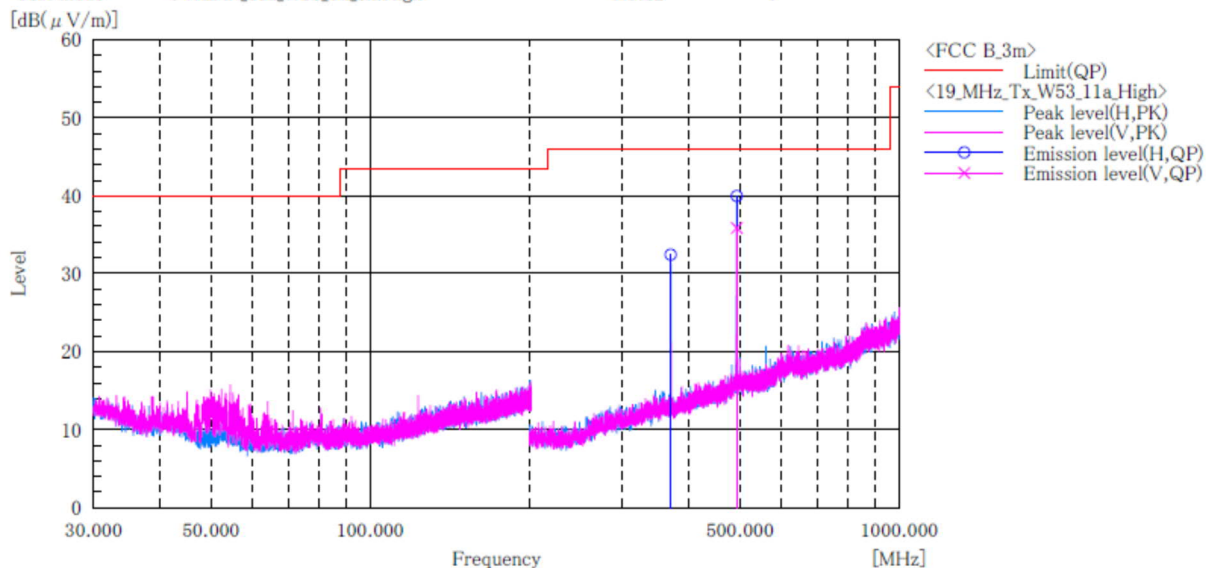

## Final Result

| No. | Frequency [MHz] | (P) | Reading QP [dB(μV)] | c.f [dB(1/m)] | Result QP [dB(μV/m)] | Limit QP [dB(μV/m)] | Margin QP [dB] | Height [cm] | Angle [°] | Remark |
|-----|-----------------|-----|---------------------|---------------|----------------------|---------------------|----------------|-------------|-----------|--------|
| 1   | 369.749         | H   | 44.6                | -12.2         | 32.4                 | 46.0                | 13.6           | 100.0       | 242.0     |        |
| 2   | 493.001         | H   | 49.2                | -9.2          | 40.0                 | 46.0                | 6.0            | 202.0       | 45.0      |        |
| 3   | 493.001         | V   | 45.0                | -9.2          | 35.8                 | 46.0                | 10.2           | 206.0       | 327.0     |        |


## Note:

1. Emission Level (Margin) = Limit - [Reading + Factor ( Antenna + Cable - Amp)]

**[11a]**  
**W53 / Channel High**  
**ABOVE 1GHz**

Company name : KYOCERA Corporation  
 EUT : Tablet  
 Model No. : KC-T303DT  
 Serial No. : 1080FCCR02  
 Test mode : WLAN\_W53\_11a\_Tx\_High

Standard : FCC Part.15 subpart C  
 Operator : T.Seino  
 Temp,Hum,Atm : 23.4[°C] 44.5[%]  
 Note1 : ch:64\_5320MHz  
 Note2 :

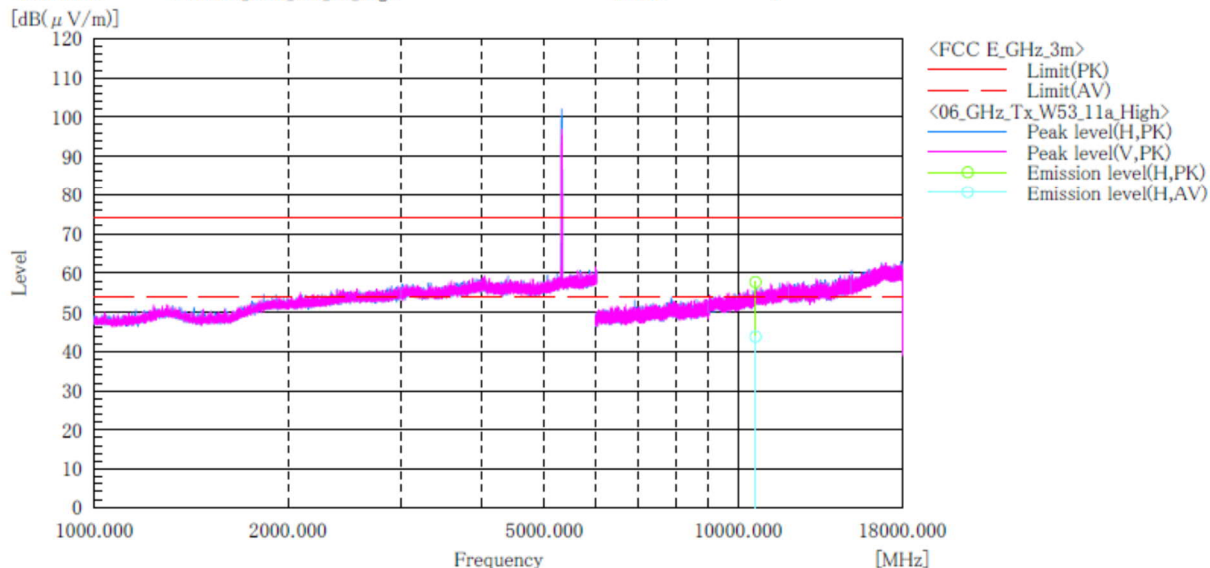

**Final Result**

| No. | Frequency | (P) | Reading  | Reading  | c.f       | Result     | Result     | Limit      | Limit      | Margin | Margin | Height | Angle | Remark |
|-----|-----------|-----|----------|----------|-----------|------------|------------|------------|------------|--------|--------|--------|-------|--------|
|     | [MHz]     |     | [dB(μV)] | [dB(μV)] | [dB(1/m)] | [dB(μV/m)] | [dB(μV/m)] | [dB(μV/m)] | [dB(μV/m)] | [dB]   | [dB]   | [cm]   | [°]   |        |
| 1   | 10640.000 | H   | 46.0     | 32.1     | 11.7      | 57.7       | 43.8       | 74.0       | 54.0       | 16.3   | 10.2   | 100.0  | 79.0  |        |


**Note:**

1. Emission Level (Margin) = Limit - [Reading + Factor ( Antenna + Cable – Amp)]
2. No emission were detected in frequency range 18GHz to 40GHz at the 3 meters distance.

**[11a]****W56 / Channel Low  
BELOW 1GHz**

Company name : KYOCERA Corporation  
 EUT : Tablet  
 Model No. : KC-T303DT  
 Serial No. : 1080FCCR02  
 Test mode : WLAN\_11a\_W56\_Tx\_ch:Low

Standard : FCC Part.15 subpartE  
 Operator : K.Saito  
 Temp,Hum : 22.6[°C] 31.3[%]  
 Note1 : CH:100 5500MHz  
 Note2 :

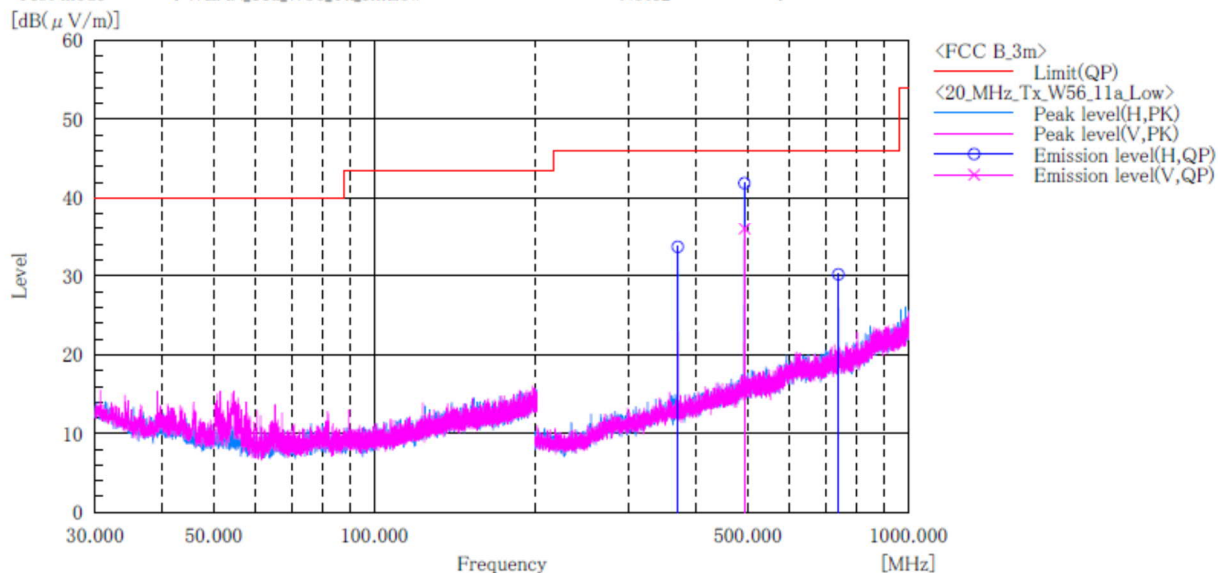
**Final Result**

| No. | Frequency [MHz] | (P) | Reading QP [dB(μV)] | c.f [dB(1/m)] | Result QP [dB(μV/m)] | Limit QP [dB(μV/m)] | Margin QP [dB] | Height [cm] | Angle [°] | Remark |
|-----|-----------------|-----|---------------------|---------------|----------------------|---------------------|----------------|-------------|-----------|--------|
| 1   | 369.750         | H   | 45.9                | -12.2         | 33.7                 | 46.0                | 12.3           | 100.0       | 98.0      |        |
| 2   | 493.001         | H   | 51.1                | -9.2          | 41.9                 | 46.0                | 4.1            | 203.0       | 271.0     |        |
| 3   | 493.001         | V   | 45.2                | -9.2          | 36.0                 | 46.0                | 10.0           | 217.0       | 343.0     |        |
| 4   | 739.489         | H   | 36.2                | -6.0          | 30.2                 | 46.0                | 15.8           | 124.0       | 289.0     |        |

**Note:**

1. Emission Level (Margin) = Limit - [Reading + Factor ( Antenna + Cable – Amp)]

## [11a]

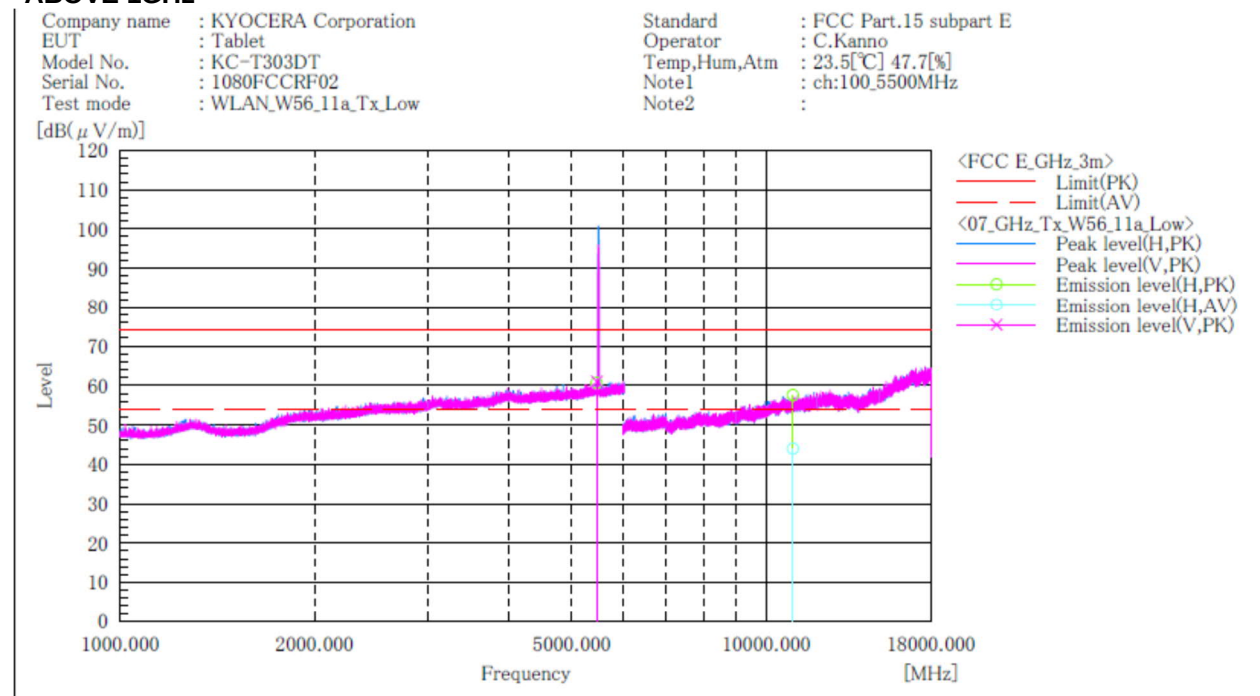W56 / Channel Low  
ABOVE 1GHz

## Final Result

| No. | Frequency [MHz] | (P) | Reading PK [dB(μV)] | Reading AV [dB(μV)] | c. f [dB(1/m)] | Result PK [dB(μV/m)] | Result AV [dB(μV/m)] | Limit PK [dB(μV/m)] | Limit AV [dB(μV/m)] | Margin PK [dB] | Margin AV [dB] | Height [cm] | Angle [°] | Remark |
|-----|-----------------|-----|---------------------|---------------------|----------------|----------------------|----------------------|---------------------|---------------------|----------------|----------------|-------------|-----------|--------|
| 1   | 5465.300        | H   | 48.9                |                     | 11.8           | 60.7                 |                      | 68.2                | 54.0                | 7.5            |                | 100.0       | 2.0       |        |
| 2   | 5467.600        | V   | 49.3                |                     | 11.8           | 61.1                 |                      | 68.2                | 54.0                | 7.1            |                | 100.0       | 347.0     |        |
| 3   | 11000.000       | H   | 45.3                | 31.7                | 12.3           | 57.6                 | 44.0                 | 74.0                | 54.0                | 16.4           | 10.0           | 200.0       | 0.0       |        |

## Note:

- Emission Level (Margin) = Limit - [Reading + Factor ( Antenna + Cable – Amp)]
- No emission were detected in frequency range 18GHz to 40GHz at the 3 meters distance.


## [11a]

W56 / Channel Middle  
BELOW 1GHz

Company name : KYOCERA Corporation  
EUT : Tablet  
Model No. : KC-T303DT  
Serial No. : 1080FCCR02  
Test mode : WLAN\_11a\_W56\_Tx\_ch:Mid

Standard : FCC Part.15 subpart E  
Operator : T.Watanabe  
Temp,Hum : 22.6[°C] 31.3[%]  
Note1 : CH:116 5580MHz  
Note2 :

[dB(μV/m)]

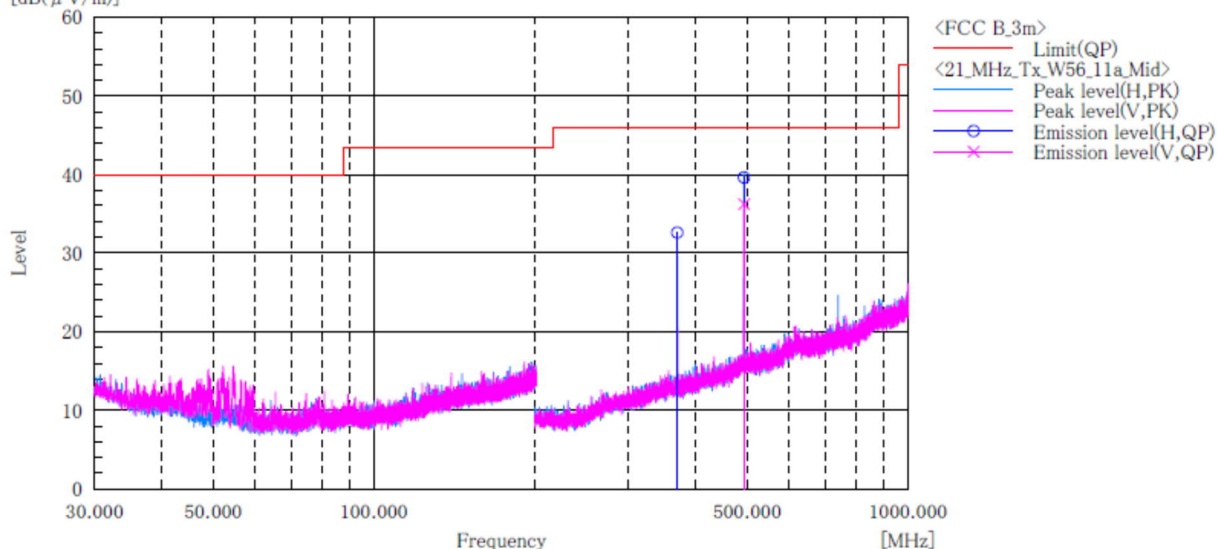


## Final Result

| No. | Frequency [MHz] | (P) | Reading QP [dB(μV)] | c.f [dB(1/m)] | Result QP [dB(μV/m)] | Limit QP [dB(μV/m)] | Margin QP [dB] | Height [cm] | Angle [°] | Remark |
|-----|-----------------|-----|---------------------|---------------|----------------------|---------------------|----------------|-------------|-----------|--------|
| 1   | 369.738         | H   | 44.8                | -12.2         | 32.6                 | 46.0                | 13.4           | 100.0       | 93.0      |        |
| 2   | 493.001         | H   | 48.9                | -9.2          | 39.7                 | 46.0                | 6.3            | 189.0       | 29.0      |        |
| 3   | 493.001         | V   | 45.4                | -9.2          | 36.2                 | 46.0                | 9.8            | 214.0       | 336.0     |        |

## Note:

1. Emission Level (Margin) = Limit - [Reading + Factor ( Antenna + Cable – Amp)]

## [11a]

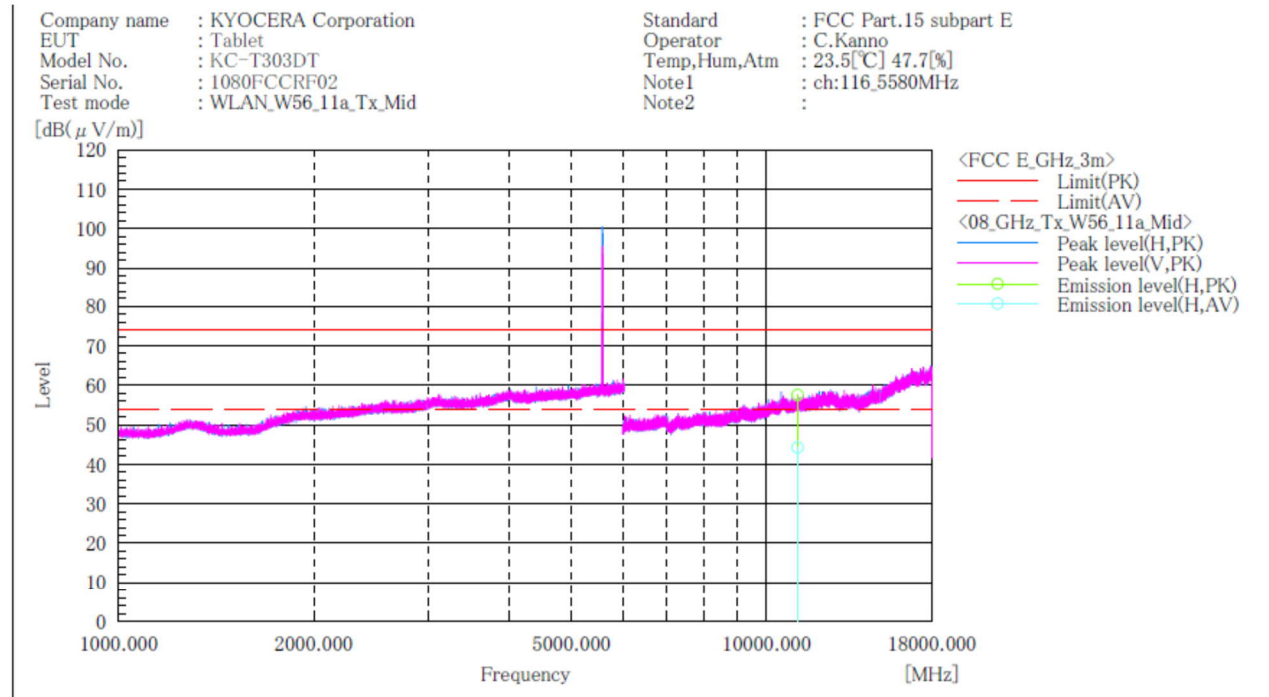**W56 / Channel Middle**  
**ABOVE 1GHz**


## Final Result

| No. | Frequency (P) | Reading PK | Reading AV | c. f      | Result PK  | Result AV  | Limit PK   | Limit AV   | Margin PK | Margin AV | Height | Angle | Remark |
|-----|---------------|------------|------------|-----------|------------|------------|------------|------------|-----------|-----------|--------|-------|--------|
|     | [MHz]         | [dB(μV)]   | [dB(μV)]   | [dB(1/m)] | [dB(μV/m)] | [dB(μV/m)] | [dB(μV/m)] | [dB(μV/m)] | [dB]      | [dB]      | [cm]   | [°]   |        |
| 1   | 11160.000     | H          | 45.3       | 32.0      | 12.3       | 57.6       | 44.3       | 74.0       | 54.0      | 16.4      | 9.7    | 200.0 | 75.0   |

## Note:


- Emission Level (Margin) = Limit - [Reading + Factor ( Antenna + Cable – Amp)]
- No emission were detected in frequency range 18GHz to 40GHz at the 3 meters distance.

## [11a]

W56 / Channel High  
BELOW 1GHz

Company name : KYOCERA Corporation  
EUT : Tablet  
Model No. : KC-T303DT  
Serial No. : 1080FCCR02  
Test mode : WLAN\_11a\_W56\_Tx\_ch:High

Standard : FCC Part.15 subpartE  
Operator : K.Saito  
Temp,Hum : 22.6[°C] 31.3[%]  
Note1 : CH:140 5700MHz  
Note2 :

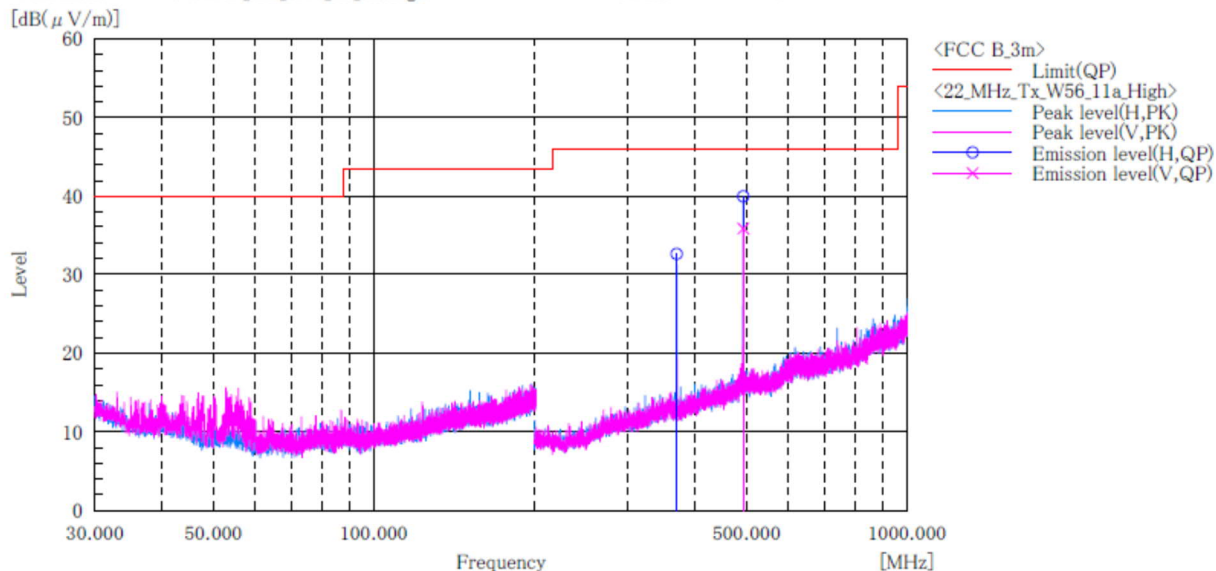

## Final Result

| No. | Frequency [MHz] | (P) | Reading QP [dB(μV)] | c.f [dB(1/m)] | Result QP [dB(μV/m)] | Limit QP [dB(μV/m)] | Margin QP [dB] | Height [cm] | Angle [°] | Remark |
|-----|-----------------|-----|---------------------|---------------|----------------------|---------------------|----------------|-------------|-----------|--------|
| 1   | 369.752         | H   | 44.8                | -12.2         | 32.6                 | 46.0                | 13.4           | 100.0       | 256.0     |        |
| 2   | 493.001         | H   | 49.2                | -9.2          | 40.0                 | 46.0                | 6.0            | 186.0       | 49.0      |        |
| 3   | 493.001         | V   | 45.0                | -9.2          | 35.8                 | 46.0                | 10.2           | 204.0       | 355.0     |        |

## Note:

1. Emission Level (Margin) = Limit - [Reading + Factor ( Antenna + Cable – Amp)]

## [11a]


## W56 / Channel High

## ABOVE 1GHz

Company name : KYOCERA Corporation  
 EUT : Tablet  
 Model No. : KC-T303DT  
 Serial No. : 1080FCCR02  
 Test mode : WLAN\_W56\_11a\_Tx\_High

Standard : FCC Part.15 subpart E  
 Operator : C.Kanno  
 Temp,Hum,Atm : 23.5[°C] 47.7[%]  
 Note1 : ch:140\_5700MHz  
 Note2 :

[dB(μV/m)]

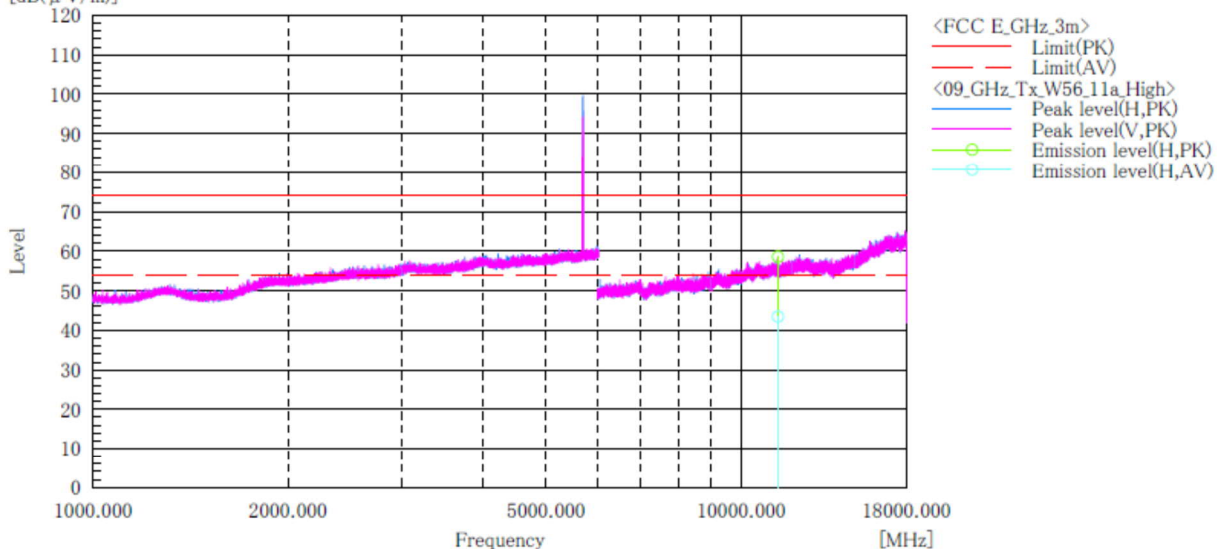

## Final Result

| No. | Frequency (P) | Reading PK | Reading AV | c.f       | Result PK  | Result AV  | Limit PK   | Limit AV   | Margin PK | Margin AV | Height | Angle | Remark |  |
|-----|---------------|------------|------------|-----------|------------|------------|------------|------------|-----------|-----------|--------|-------|--------|--|
|     | [MHz]         | [dB(μV)]   | [dB(μV)]   | [dB(1/m)] | [dB(μV/m)] | [dB(μV/m)] | [dB(μV/m)] | [dB(μV/m)] | [dB]      | [dB]      | [cm]   | [°]   |        |  |
| 1   | 11400.000     | H          | 46.1       | 31.0      | 12.5       | 58.6       | 43.5       | 74.0       | 54.0      | 15.4      | 10.5   | 100.0 | 125.0  |  |


## Note:

1. Emission Level (Margin) = Limit - [Reading + Factor ( Antenna + Cable – Amp)]
2. No emission were detected in frequency range 18GHz to 40GHz at the 3 meters distance.

**[11a]****W56 / Channel High  
BELOW 1GHz**

Company name : KYOCERA Corporation  
 EUT : Tablet  
 Model No. : KC-T303DT  
 Serial No. : 1080FCCR02  
 Test mode : WLAN\_11a\_W56\_Tx\_ch:High

Standard : FCC Part.15 subpartE  
 Operator : K.Saito  
 Temp,Hum : 22.6[°C] 31.3[%]  
 Note1 : CH:144 5720MHz  
 Note2 :

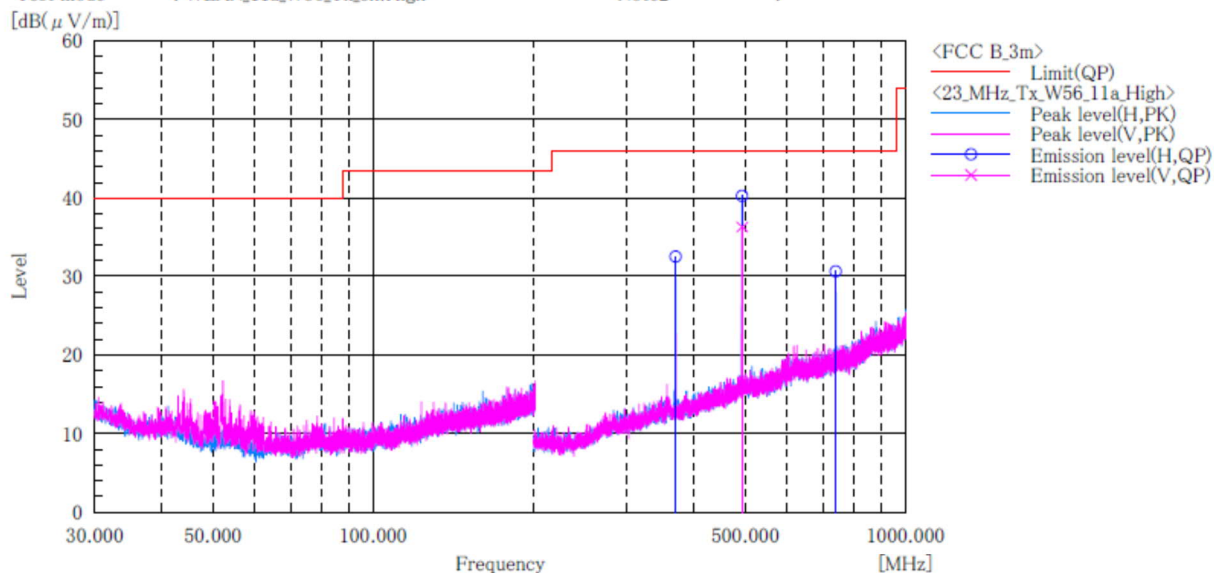**Final Result**

| No. | Frequency [MHz] | (P) | Reading QP [dB(μV)] | c.f [dB(1/m)] | Result QP [dB(μV/m)] | Limit QP [dB(μV/m)] | Margin QP [dB] | Height [cm] | Angle [°] | Remark |
|-----|-----------------|-----|---------------------|---------------|----------------------|---------------------|----------------|-------------|-----------|--------|
| 1   | 369.742         | H   | 44.7                | -12.2         | 32.5                 | 46.0                | 13.5           | 100.0       | 249.0     |        |
| 2   | 493.001         | H   | 49.5                | -9.2          | 40.3                 | 46.0                | 5.7            | 195.0       | 50.0      |        |
| 3   | 493.001         | V   | 45.5                | -9.2          | 36.3                 | 46.0                | 9.7            | 212.0       | 338.0     |        |
| 4   | 739.509         | H   | 36.6                | -6.0          | 30.6                 | 46.0                | 15.4           | 124.0       | 280.0     |        |

**Note:**

1. Emission Level (Margin) = Limit - [Reading + Factor ( Antenna + Cable – Amp)]


## [11a]

## W56 / Channel High

## ABOVE 1GHz

Company name : KYOCERA Corporation  
 EUT : Tablet  
 Model No. : KC-T303DT  
 Serial No. : 1080FCCR02  
 Test mode : WLAN\_W56\_11a\_Tx\_High

Standard : FCC Part.15 subpart E  
 Operator : C.Kanno  
 Temp,Hum,Atm : 23.5[°C] 47.7[%]  
 Note1 : ch:144\_5720MHz  
 Note2 :

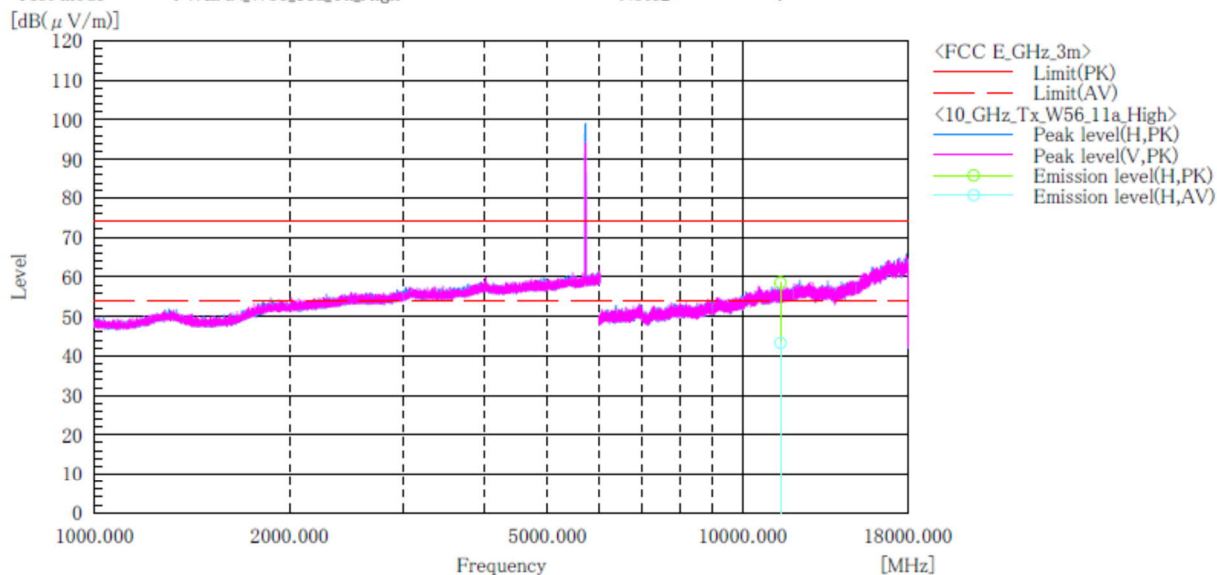

## Final Result

| No. | Frequency (P) | Reading PK | Reading AV | c. f      | Result PK  | Result AV  | Limit PK   | Limit AV   | Margin PK | Margin AV | Height | Angle | Remark |
|-----|---------------|------------|------------|-----------|------------|------------|------------|------------|-----------|-----------|--------|-------|--------|
|     | [MHz]         | [dB(μV)]   | [dB(μV)]   | [dB(1/m)] | [dB(μV/m)] | [dB(μV/m)] | [dB(μV/m)] | [dB(μV/m)] | [dB]      | [dB]      | [cm]   | [°]   |        |
| 1   | 11440.000     | H          | 46.0       | 30.8      | 12.5       | 58.5       | 43.3       | 74.0       | 54.0      | 15.5      | 10.7   | 100.0 | 174.0  |


## Note:

- Emission Level (Margin) = Limit - [Reading + Factor ( Antenna + Cable – Amp)]
- No emission were detected in frequency range 18GHz to 40GHz at the 3 meters distance.

**[11n(HT20)]**  
**W52 / Channel Low**  
**BELOW 1GHz**

Company name : KYOCERA Corporation  
 EUT : Tablet  
 Model No. : KC-T303DT  
 Serial No. : 1080FCCR02  
 Test mode : WLAN\_11n(HT20)\_W52\_Tx\_ch:Low

Standard : FCC Part.15 subpart E  
 Operator : K.Saito  
 Temp,Hum : 22.6[°C] 31.3[%]  
 Note1 : CH:36 5180MHz  
 Note2 :

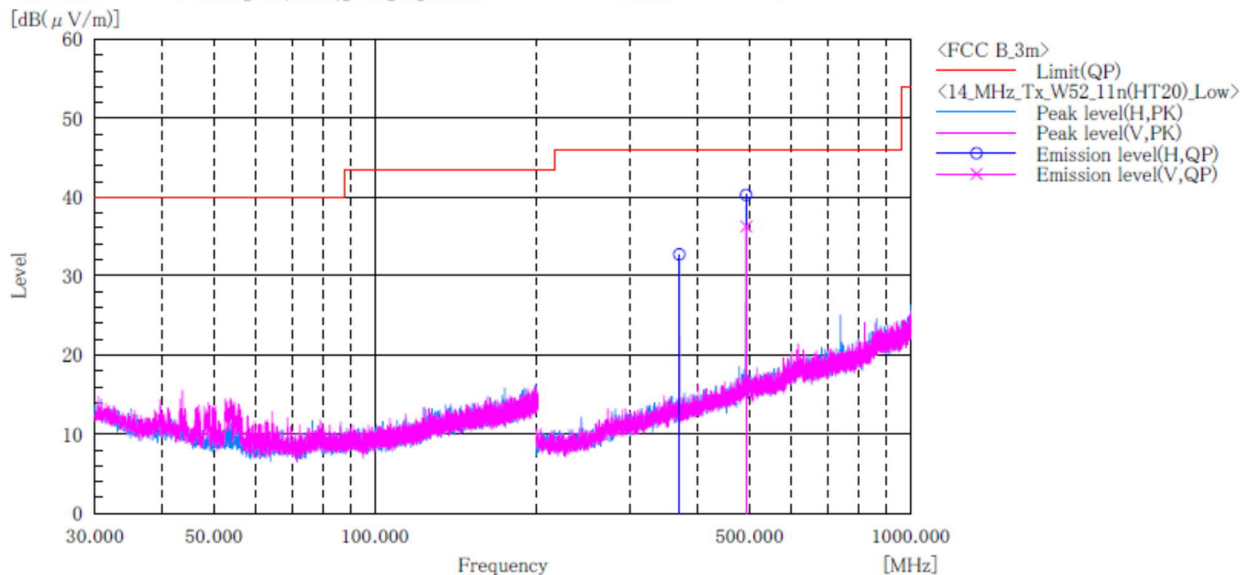

**Final Result**

| No. | Frequency [MHz] | (P) | Reading QP [dB(μV)] | c. f [dB(1/m)] | Result QP [dB(μV/m)] | Limit QP [dB(μV/m)] | Margin QP [dB] | Height [cm] | Angle [°] | Remark |
|-----|-----------------|-----|---------------------|----------------|----------------------|---------------------|----------------|-------------|-----------|--------|
| 1   | 369.747         | H   | 44.9                | -12.2          | 32.7                 | 46.0                | 13.3           | 100.0       | 92.0      |        |
| 2   | 493.001         | H   | 49.5                | -9.2           | 40.3                 | 46.0                | 5.7            | 195.0       | 48.0      |        |
| 3   | 493.001         | V   | 45.4                | -9.2           | 36.2                 | 46.0                | 9.8            | 209.0       | 332.0     |        |


**Note:**

1. Emission Level (Margin) = Limit - [Reading + Factor ( Antenna + Cable – Amp)]

**[11n(HT20)]**  
**W52 / Channel Low**  
**ABOVE 1GHz**

Company name : KYOCERA Corporation  
 EUT : Tablet  
 Model No. : KC-T303DT  
 Serial No. : 1080FCCR02  
 Test mode : WLAN\_W52\_11n(HT20)\_Tx\_Low

Standard : FCC Part.15 subpart E  
 Operator : C.Kanno  
 Temp,Hum,Atm : 23.5[°C] 47.7[%]  
 Note1 : ch:36,5180MHz  
 Note2 :

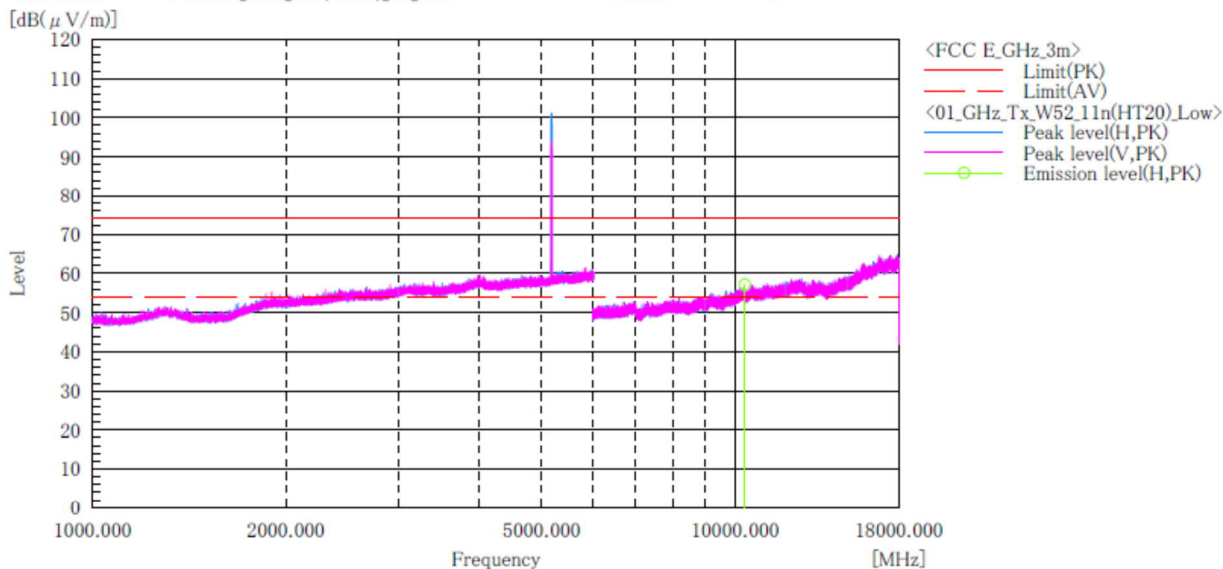

**Final Result**

| No. | Frequency [MHz] | (P) | Reading PK [dB(μV)] | c. f [dB(1/m)] | Result PK [dB(μV/m)] | Limit PK [dB(μV/m)] | Margin PK [dB] | Height [cm] | Angle [°] | Remark |
|-----|-----------------|-----|---------------------|----------------|----------------------|---------------------|----------------|-------------|-----------|--------|
| 1   | 10360.000       | H   | 46.0                | 11.2           | 57.2                 | 68.2                | 11.0           | 100.0       | 221.0     |        |


**Note:**

- Emission Level (Margin) = Limit - [Reading + Factor ( Antenna + Cable – Amp)]
- No emission were detected in frequency range 18GHz to 40GHz at the 3 meters distance.

**[11n(HT20)]**  
**W52 / Channel Middle**  
**BELOW 1GHz**

Company name : KYOCERA Corporation  
 EUT : Tablet  
 Model No. : KC-T303DT  
 Serial No. : 1080FCCR02  
 Test mode : WLAN\_11n(HT20)\_W52\_Tx\_ch:Mid

Standard : FCC Part.15 subpart E  
 Operator : K.Saito  
 Temp,Hum : 22.6[°C] 31.3[%]  
 Note1 : CH:40 5200MHz  
 Note2 :

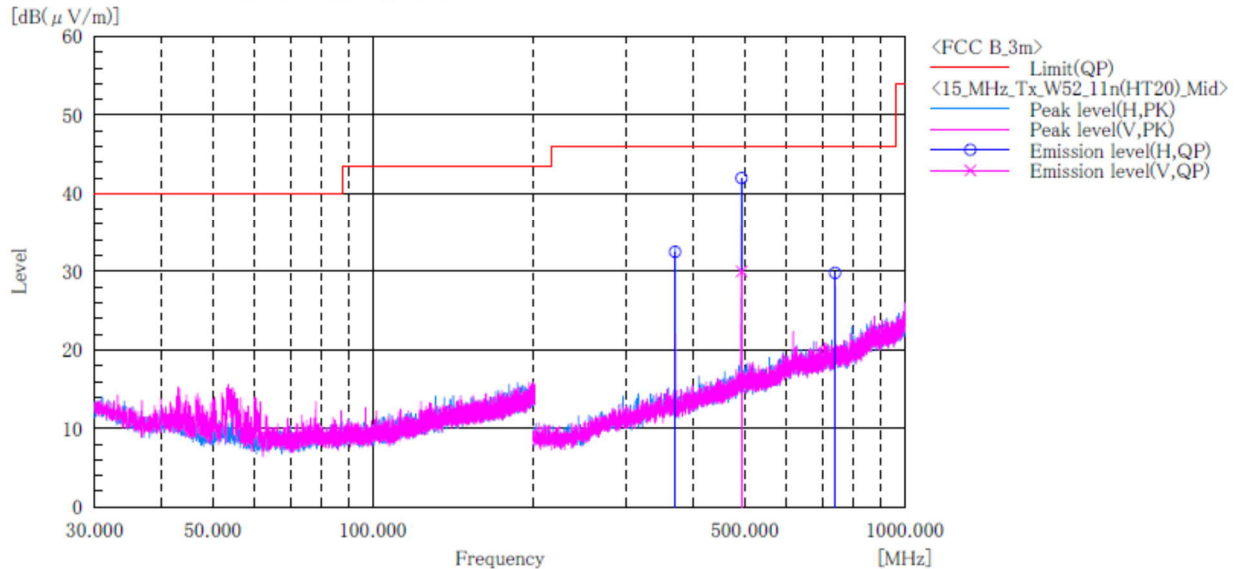


**Final Result**

| No. | Frequency [MHz] | (P) | Reading QP [dB(μV)] | c.f [dB(1/m)] | Result QP [dB(μV/m)] | Limit QP [dB(μV/m)] | Margin QP [dB] | Height [cm] | Angle [°] | Remark |
|-----|-----------------|-----|---------------------|---------------|----------------------|---------------------|----------------|-------------|-----------|--------|
| 1   | 369.753         | H   | 44.7                | -12.2         | 32.5                 | 46.0                | 13.5           | 100.0       | 83.0      |        |
| 2   | 739.511         | H   | 35.8                | -6.0          | 29.8                 | 46.0                | 16.2           | 129.0       | 275.0     |        |
| 3   | 493.001         | H   | 51.2                | -9.2          | 42.0                 | 46.0                | 4.0            | 192.0       | 267.0     |        |
| 4   | 493.001         | V   | 39.2                | -9.2          | 30.0                 | 46.0                | 16.0           | 208.0       | 175.0     |        |

**Note:**

1. Emission Level (Margin) = Limit - [Reading + Factor ( Antenna + Cable – Amp)]

**[11n(HT20)]**  
**W52 / Channel Middle**  
**ABOVE 1GHz**

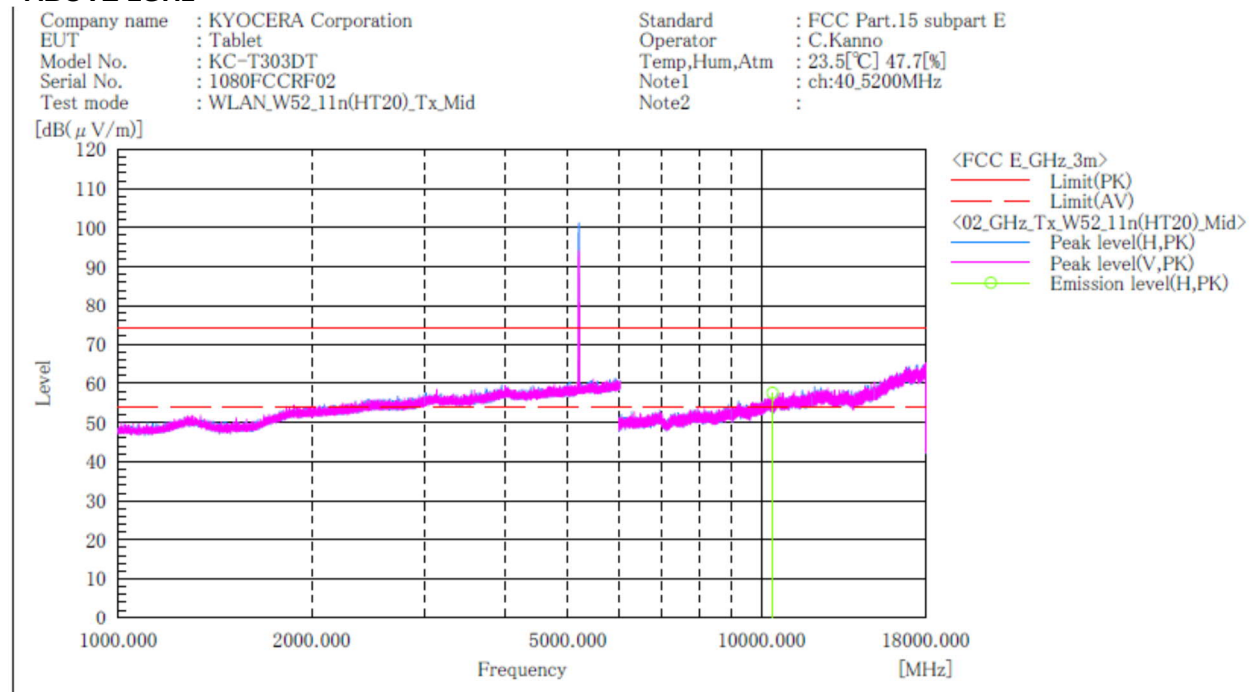

**Final Result**

| No. | Frequency [MHz] | (P) | Reading PK [dB(μV)] | c. f [dB(1/m)] | Result PK [dB(μV/m)] | Limit PK [dB(μV/m)] | Margin PK [dB] | Height [cm] | Angle [°] | Remark |
|-----|-----------------|-----|---------------------|----------------|----------------------|---------------------|----------------|-------------|-----------|--------|
| 1   | 10400.000       | H   | 46.3                | 11.3           | 57.6                 | 68.2                | 10.6           | 138.0       | 162.0     |        |


**Note:**

- Emission Level (Margin) = Limit - [Reading + Factor ( Antenna + Cable – Amp)]
- No emission were detected in frequency range 18GHz to 40GHz at the 3 meters distance.

**[11n(HT20)]**  
**W52 / Channel High**  
**BELOW 1GHz**

Company name : KYOCERA Corporation  
 EUT : Tablet  
 Model No. : KC-T303DT  
 Serial No. : 1080FCCR02  
 Test mode : WLAN\_11n(HT20)\_W52\_Tx\_ch:High

Standard : FCC Part.15 subpart E  
 Operator : K.Saito  
 Temp,Hum : 22.6[°C] 31.3[%]  
 Note1 : CH:48 5240MHz  
 Note2 :

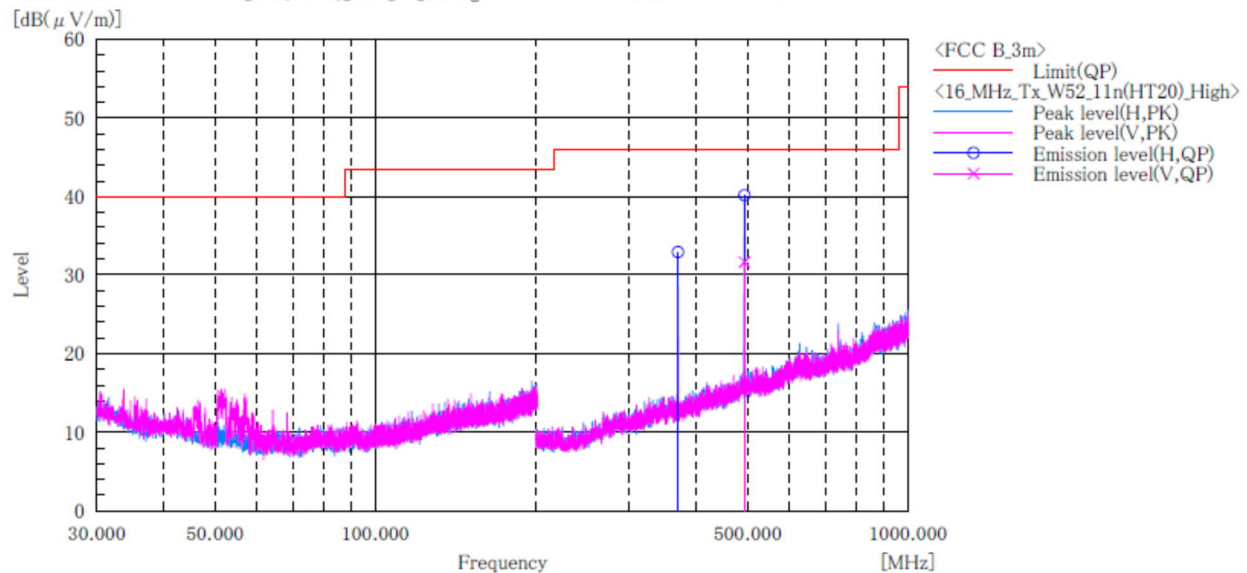

**Final Result**

| No. | Frequency [MHz] | (P) | Reading QP [dB(μV)] | c.f [dB(1/m)] | Result QP [dB(μV/m)] | Limit QP [dB(μV/m)] | Margin QP [dB] | Height [cm] | Angle [°] | Remark |
|-----|-----------------|-----|---------------------|---------------|----------------------|---------------------|----------------|-------------|-----------|--------|
| 1   | 369.749         | H   | 45.1                | -12.2         | 32.9                 | 46.0                | 13.1           | 100.0       | 86.0      |        |
| 2   | 493.001         | H   | 49.4                | -9.2          | 40.2                 | 46.0                | 5.8            | 187.0       | 43.0      |        |
| 3   | 493.001         | V   | 40.8                | -9.2          | 31.6                 | 46.0                | 14.4           | 209.0       | 105.0     |        |


**Note:**

1. Emission Level (Margin) = Limit - [Reading + Factor ( Antenna + Cable – Amp)]

**[11n(HT20)]**  
**W52 / Channel High**  
**ABOVE 1GHz**

Company name : KYOCERA Corporation  
 EUT : Tablet  
 Model No. : KC-T303DT  
 Serial No. : 1080FCCRF02  
 Test mode : WLAN\_W52\_11n(HT20)\_Tx\_High

Standard : FCC Part.15 subpart E  
 Operator : C.Kanno  
 Temp,Hum,Atm : 23.5[°C] 47.7[%]  
 Note1 : ch:48\_5240MHz  
 Note2 :

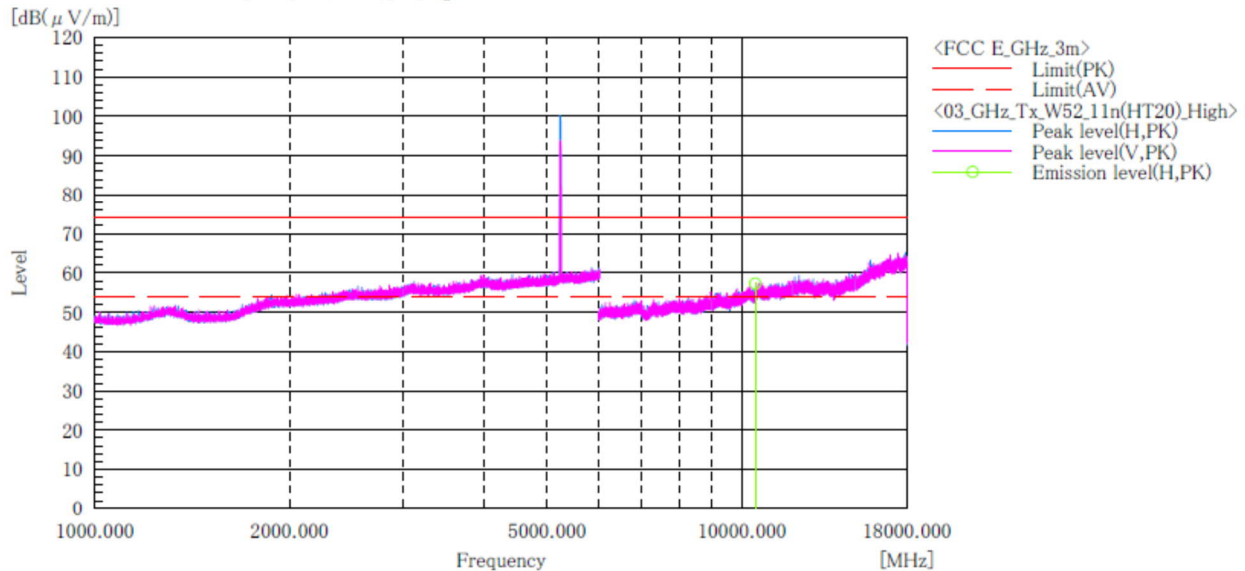

**Final Result**

| No. | Frequency | (P) | Reading        | c.f       | Result           | Limit            | Margin     | Height | Angle | Remark |
|-----|-----------|-----|----------------|-----------|------------------|------------------|------------|--------|-------|--------|
|     | [MHz]     |     | PK<br>[dB(μV)] | [dB(1/m)] | PK<br>[dB(μV/m)] | PK<br>[dB(μV/m)] | PK<br>[dB] | [cm]   | [°]   |        |
| 1   | 10480.000 | H   | 45.9           | 11.4      | 57.3             | 68.2             | 10.9       | 121.0  | 103.0 |        |


**Note:**

- Emission Level (Margin) = Limit - [Reading + Factor ( Antenna + Cable – Amp)]
- No emission were detected in frequency range 18GHz to 40GHz at the 3 meters distance.

**[11n(HT20)]**  
**W53 / Channel Low**  
**BELOW 1GHz**

Company name : KYOCERA Corporation  
 EUT : Tablet  
 Model No. : KC-T303DT  
 Serial No. : 1080FCCRF02  
 Test mode : 5GHz\_W53\_11n(HT20)\_Tx\_ch:Low

Standard : FCC Part.15 subpart E  
 Operator : K.Saito  
 Temp,Hum : 22.6[°C] 31.3[%]  
 Note1 : CH:52 5260MHz  
 Note2 :

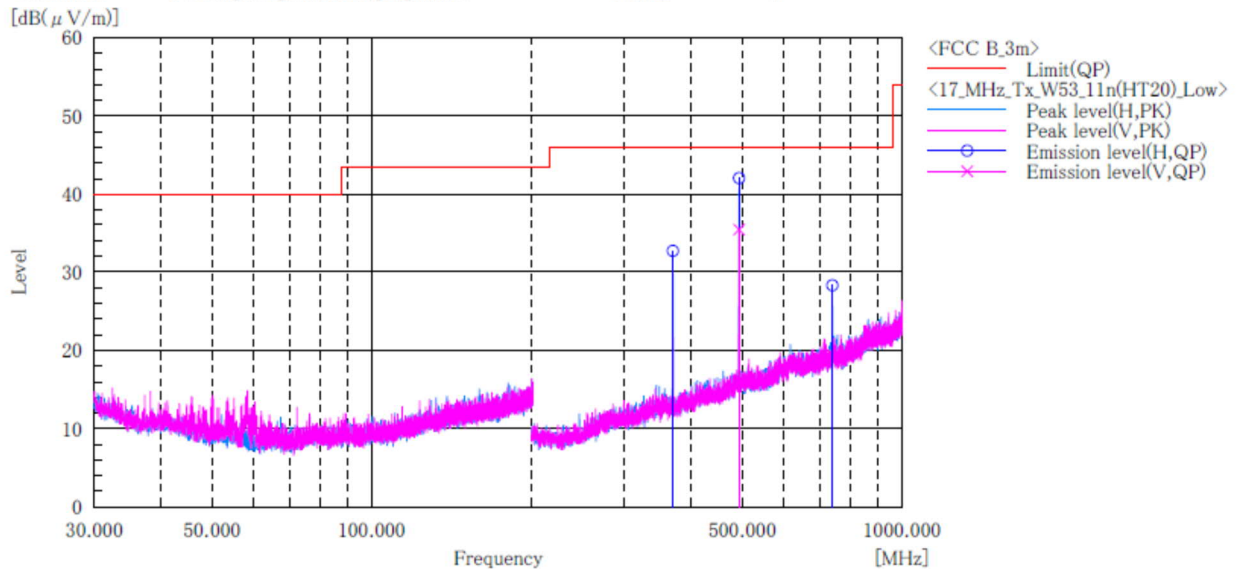

**Final Result**

| No. | Frequency [MHz] | (P) | Reading QP [dB(μV)] | c. f [dB(1/m)] | Result QP [dB(μV/m)] | Limit QP [dB(μV/m)] | Margin QP [dB] | Height [cm] | Angle [°] | Remark |
|-----|-----------------|-----|---------------------|----------------|----------------------|---------------------|----------------|-------------|-----------|--------|
| 1   | 369.744         | H   | 44.9                | -12.2          | 32.7                 | 46.0                | 13.3           | 100.0       | 83.0      |        |
| 2   | 739.497         | H   | 34.3                | -6.0           | 28.3                 | 46.0                | 17.7           | 133.0       | 265.0     |        |
| 3   | 493.001         | H   | 51.3                | -9.2           | 42.1                 | 46.0                | 3.9            | 202.0       | 258.0     |        |
| 4   | 493.001         | V   | 44.6                | -9.2           | 35.4                 | 46.0                | 10.6           | 205.0       | 0.0       |        |


**Note:**

1. Emission Level (Margin) = Limit - [Reading + Factor ( Antenna + Cable – Amp)]

**[11n(HT20)]**  
**W53 / Channel Low**  
**ABOVE 1GHz**

Company name : KYOCERA Corporation  
 EUT : Tablet  
 Model No. : KC-T303DT  
 Serial No. : 1080FCCR02  
 Test mode : WLAN\_W53\_11n(HT20)\_Tx\_Low

Standard : FCC Part.15 subpart E  
 Operator : C.Kanno  
 Temp,Hum,Atm : 23.5[°C] 47.7[%]  
 Note1 : ch:52\_5260MHz  
 Note2 :

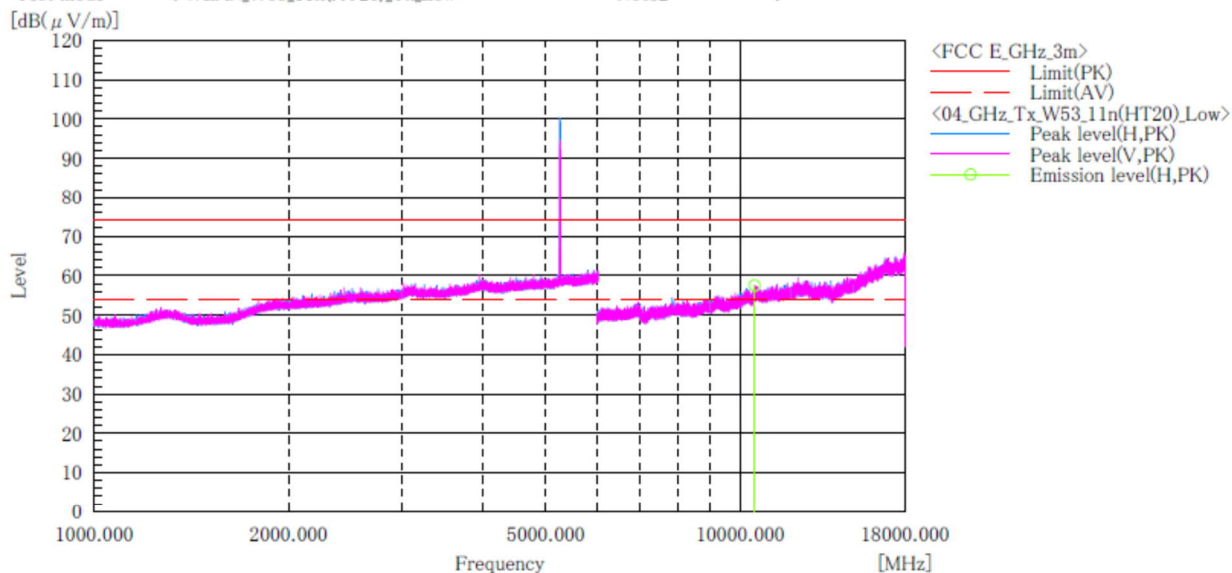

**Final Result**

| No. | Frequency [MHz] | (P) | Reading PK [dB(μV)] | c.f [dB(1/m)] | Result PK [dB(μV/m)] | Limit PK [dB(μV/m)] | Margin PK [dB] | Height [cm] | Angle [°] | Remark |
|-----|-----------------|-----|---------------------|---------------|----------------------|---------------------|----------------|-------------|-----------|--------|
| 1   | 10520.000       | H   | 46.0                | 11.5          | 57.5                 | 68.2                | 10.7           | 142.0       | 168.0     |        |


**Note:**

1. Emission Level (Margin) = Limit - [Reading + Factor ( Antenna + Cable – Amp)]
2. No emission were detected in frequency range 18GHz to 40GHz at the 3 meters distance.

**[11n(HT20)]**  
**W53 / Channel Middle**  
**BELOW 1GHz**

Company name : KYOCERA Corporation  
 EUT : Tablet  
 Model No. : KC-T303DT  
 Serial No. : 1080FCCR02  
 Test mode : 5GHz\_W53\_11n(HT20)\_Tx\_ch:Mid

Standard : FCC Part.15 subpart E  
 Operator : K.Saito  
 Temp,Hum : 22.6[°C] 31.3[%]  
 Note1 : CH:56 5280MHz  
 Note2 :

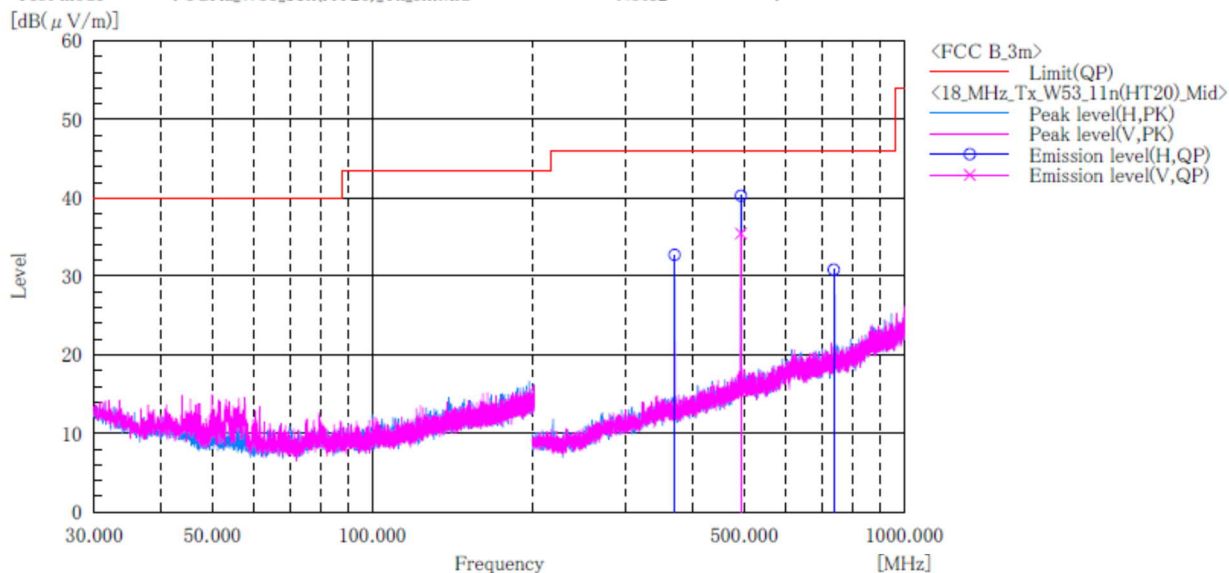

**Final Result**

| No. | Frequency [MHz] | (P) | Reading QP [dB(μV)] | c.f [dB(1/m)] | Result QP [dB(μV/m)] | Limit QP [dB(μV/m)] | Margin QP [dB] | Height [cm] | Angle [°] | Remark |
|-----|-----------------|-----|---------------------|---------------|----------------------|---------------------|----------------|-------------|-----------|--------|
| 1   | 369.745         | H   | 44.9                | -12.2         | 32.7                 | 46.0                | 13.3           | 100.0       | 86.0      |        |
| 2   | 493.001         | H   | 49.5                | -9.2          | 40.3                 | 46.0                | 5.7            | 189.0       | 36.0      |        |
| 3   | 493.001         | V   | 44.6                | -9.2          | 35.4                 | 46.0                | 10.6           | 223.0       | 321.0     |        |
| 4   | 736.496         | H   | 36.8                | -6.0          | 30.8                 | 46.0                | 15.2           | 124.0       | 293.0     |        |

**Note:**


1. Emission Level (Margin) = Limit - [Reading + Factor ( Antenna + Cable – Amp)]

**[11n(HT20)]****W53 / Channel Middle****ABOVE 1GHz**

Company name : KYOCERA Corporation  
 EUT : Tablet  
 Model No. : KC-T303DT  
 Serial No. : 1080FCCR02  
 Test mode : WLAN\_W53\_11n(HT20)\_Tx\_Mid

Standard : FCC Part.15 subpart E  
 Operator : C.Kanno  
 Temp,Hum,Atm : 23.5[°C] 47.7[%]  
 Note1 : ch:56\_5280MHz  
 Note2 :

[dB(μV/m)]

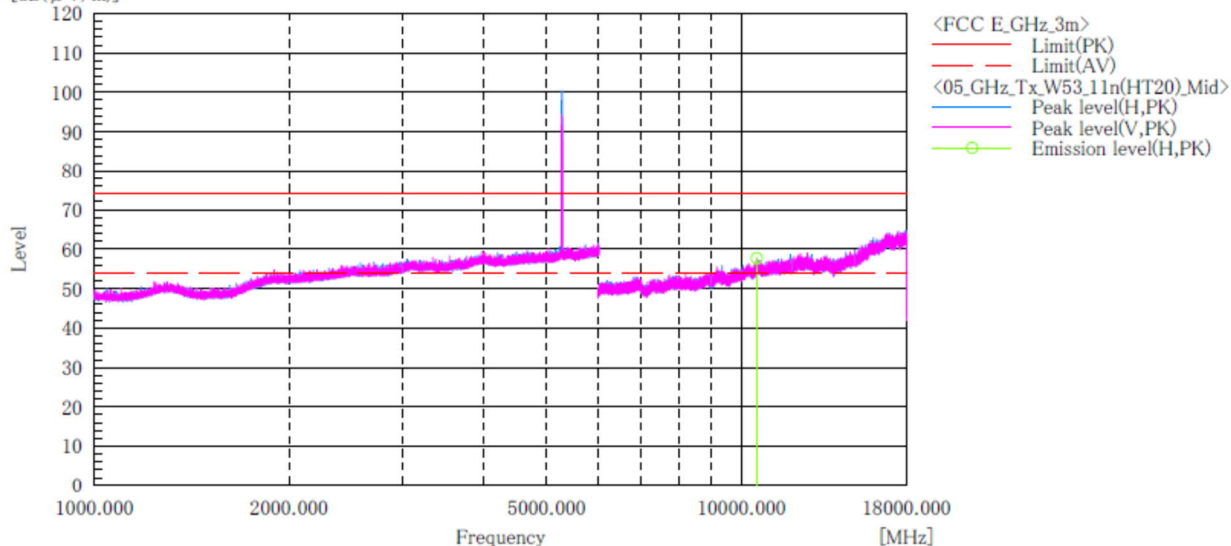**Final Result**

| No. | Frequency [MHz] | (P) | Reading PK [dB(μV)] | c.f [dB(1/m)] | Result PK [dB(μV/m)] | Limit PK [dB(μV/m)] | Margin PK [dB] | Height [cm] | Angle [°] | Remark |
|-----|-----------------|-----|---------------------|---------------|----------------------|---------------------|----------------|-------------|-----------|--------|
| 1   | 10560.000       | H   | 46.2                | 11.5          | 57.7                 | 68.2                | 10.5           | 131.0       | 189.0     |        |


**Note:**

1. Emission Level (Margin) = Limit - [Reading + Factor ( Antenna + Cable – Amp)]
2. No emission were detected in frequency range 18GHz to 40GHz at the 3 meters distance.

**[11n(HT20)]**  
**W53 / Channel High**  
**BELOW 1GHz**

Company name : KYOCERA Corporation  
 EUT : Tablet  
 Model No. : KC-T303DT  
 Serial No. : 1080FCCR02  
 Test mode : 5GHz\_W53\_11n(HT20)\_Tx\_ch:High

Standard : FCC Part.15 subpart E  
 Operator : K.Saito  
 Temp,Hum : 22.6[°C] 31.3[%]  
 Note1 : CH:64 5320MHz  
 Note2 :

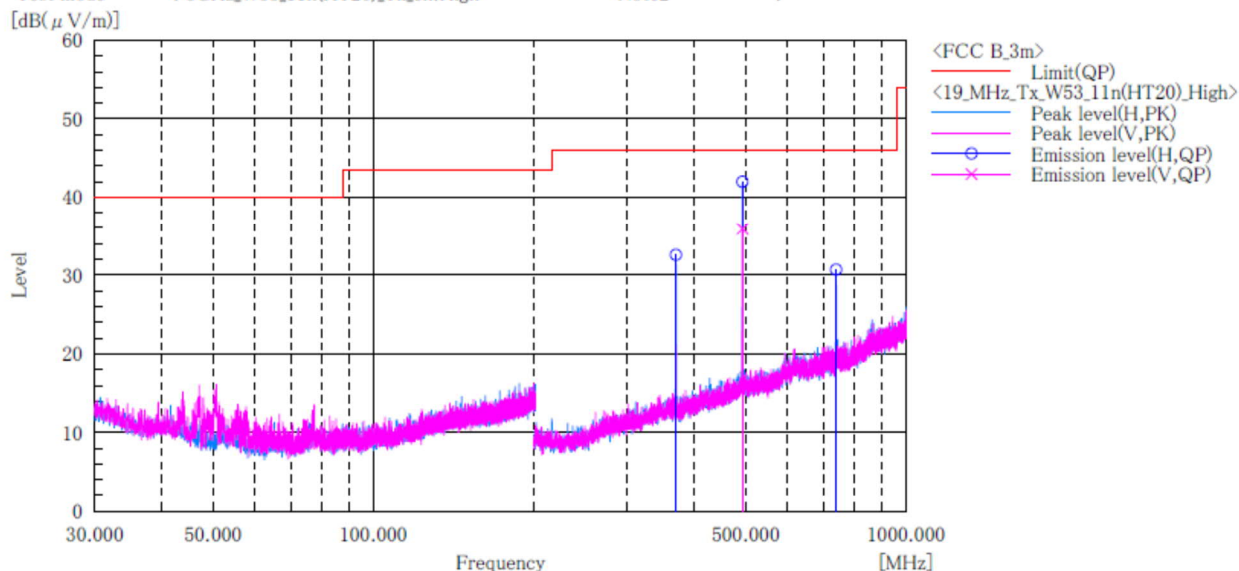


**Final Result**

| No. | Frequency [MHz] | (P) | Reading QP [dB(μV)] | c.f [dB(1/m)] | Result QP [dB(μV/m)] | Limit QP [dB(μV/m)] | Margin QP [dB] | Height [cm] | Angle [°] | Remark |
|-----|-----------------|-----|---------------------|---------------|----------------------|---------------------|----------------|-------------|-----------|--------|
| 1   | 369.752         | H   | 44.8                | -12.2         | 32.6                 | 46.0                | 13.4           | 100.0       | 253.0     |        |
| 2   | 493.001         | H   | 51.2                | -9.2          | 42.0                 | 46.0                | 4.0            | 209.0       | 261.0     |        |
| 3   | 493.001         | V   | 45.1                | -9.2          | 35.9                 | 46.0                | 10.1           | 218.0       | 326.0     |        |
| 4   | 739.504         | H   | 36.7                | -6.0          | 30.7                 | 46.0                | 15.3           | 116.0       | 287.0     |        |

**Note:**

1. Emission Level (Margin) = Limit - [Reading + Factor ( Antenna + Cable – Amp)]

**[11n(HT20)]**  
**W53 / Channel High**  
**ABOVE 1GHz**

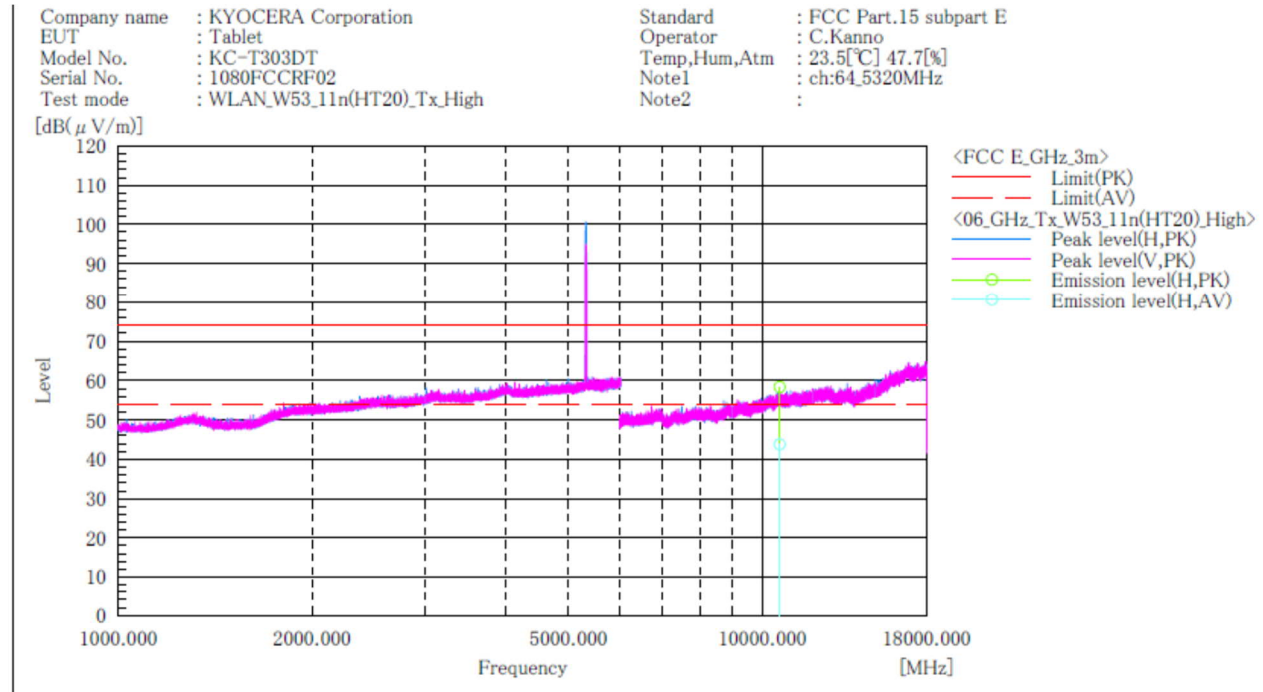

## Final Result

| No. | Frequency (P) | Reading PK | Reading AV | c.f       | Result PK   | Result AV   | Limit PK    | Limit AV    | Margin PK | Margin AV | Height | Angle | Remark |  |
|-----|---------------|------------|------------|-----------|-------------|-------------|-------------|-------------|-----------|-----------|--------|-------|--------|--|
|     | [MHz]         | [dB(μ V)]  | [dB(μ V)]  | [dB(1/m)] | [dB(μ V/m)] | [dB(μ V/m)] | [dB(μ V/m)] | [dB(μ V/m)] | [dB]      | [dB]      | [cm]   | [°]   |        |  |
| 1   | 10640.000     | H          | 46.7       | 32.1      | 11.7        | 58.4        | 43.8        | 74.0        | 54.0      | 15.6      | 10.2   | 118.0 | 168.0  |  |

## Note:

1. Emission Level (Margin) = Limit - [Reading + Factor ( Antenna + Cable – Amp)]
2. No emission were detected in frequency range 18GHz to 40GHz at the 3 meters distance.