

FCC Part 15B Compliance Test Report

Test Report no.:	FCC15B_RX-51_48.doc	Date of Report:	24-May-2010
Number of pages:	6	Customer's Contact person:	Niina Upola
Testing laboratory:	TCC Nokia Beijing Laboratory Beijing Economic and Technological Development Area No.5 Donghuan Zhonglu Beijing PRC China 100176 Tel. +86 10 8711 8888 Fax. +86 10 8711 4550	Customer:	Nokia Corporation P.O. Box 50 Elektroniikkatie 10 FIN-90571 OULU, FINLAND Tel. +358 (0) 7180 08000 Fax. +358 (0) 7180 47222
FCC listing no.:	975940		
IC recognition no.:	661AH-1		
Tested devices/ accessories:	Phone RX-51 / Battery BL-5J / Headset WH-205 / Data cable CA-101D / Laptop IBM T40		
FCC ID:	LJPRX-51	IC:	661E-RX51
Supplement reports:	-		
Testing has been carried out in accordance with:	CFR 47, FCC rules Part 15 Subpart B, ANSI C63.4 (2003), ICES-003 and CISPR 22. Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method and limit".		
Documentation:	The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory. The documentation of the testing performed on the tested devices is archived for 15 years at TCC Nokia.		
Test Results:	The EUT complies with the requirements in respect of all parameters subject to the test. The test results relate only to devices specified in this document.		
Date and signature for the contents:			

Jia Dongsheng, System Manager

1. Summary for FCC Part 15B Compliance Test Report

Date of receipt	20-May-2010
Testing completed	24-May-2010
The customer's contact person	Niina Upola
Test Plan referred to	T:\Projects\RX-51\TestPlan_RS\RS_testplan_RX-51_CR_HW2205.xls
Notes	-
Document name	FCC15B_RX-51_48.doc

1.1. EUT and Accessory Information

The EUT is a 7-band (GSM850/900/1800/1900 and WCDMA Band I/IV(1700)/VIII) mobile phone with GPRS, EGPRS, Bluetooth, WLAN and FM transmitter. GSM bands are tested in idle mode. Bluetooth and WLAN are tested with maximum rated TX power.

Product	Type	SN	HW	MV	SW	DUT
Phone	RX-51	004401107724466	2205	-	3.2010.02.8	51635
Battery	BL-5J	4620409457L20205330;0670573	-	-	-	51636
Headset	WH-205	06944219431D1R55431	-	-	-	51638
Data cable	CA-101D	0730368951272F04245	-	-	-	51641
Laptop	IBM T40	99FMPGT	-	-	-	51044

1.2. Summary of Test Results

WLAN:

Section in CFR 47	Section in ICES-003	Name of the test	Result
15.107, a	5.3	AC powerline conducted emissions	PASSED
15.109, a	5.5	Radiated emissions	-

PASSED
FAILED
NP

The EUT complies with the essential requirements in the standard.
The EUT does not comply with the essential requirements in the standard.
The test was not performed by the TCC Nokia Beijing Laboratory.


CONTENTS

1. Summary for FCC Part 15B Compliance Test Report	2
1.1. EUT and Accessory Information	2
1.2. Summary of Test Results	2
2. AC powerline conducted emissions (FCC §15.107, ICES-003 section 5.3)	4
2.1. Test setup	4
2.2. Test method and limit	4
2.3. WLAN Test results	5
3. Test Equipment	6
3.1. Conducted measurements	6
3.2. Radiated measurements	6

2. AC powerline conducted emissions (FCC §15.107, ICES-003 section 5.3)

EUT with DUT number	RX-51, DUT 51635
Accessories with DUT numbers	BL-5J, DUT 51636 ; WH-205, DUT 51638 ; CA-101D, DUT 51641 ; IBM T40, DUT 51044
Operation Voltage [V] / [Hz]	115 / 60
Result	PASSED
Remarks	Data was transferring between PC and mobile phone during the test. Emission was measured from PC's AC charger.
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	25 / 41 / 102.3
Date of measurements	24-May-2010
Measured by	Jia Dongsheng

2.1. Test setup



2.2. Test method and limit

The measurement is made according to ANSI C63.4-2003 as follows:

The EUT is placed on a wooden table 80 cm above the reference groundplane.

The EUT is connected via LISN to a test power supply.

The measurement results are obtained as described below:

$$U [dB\mu V] = U_{RX} + A_{TOT}$$


Where U_{RX} is receiver reading and A_{TOT} is total correction factor including cable and pulse limiter attenuations.

CISPR 22 Class B limits

Frequency range [MHz]	Quasi peak limit [dBμV]	Average limit [dBμV]
0.15 - 0.5	66 - 56	56 - 46
0.5 - 5	56	46
5 - 30	60	50

2.3. WLAN Test results

TX mode, channel 7 / 2442 MHz, DSSS mode

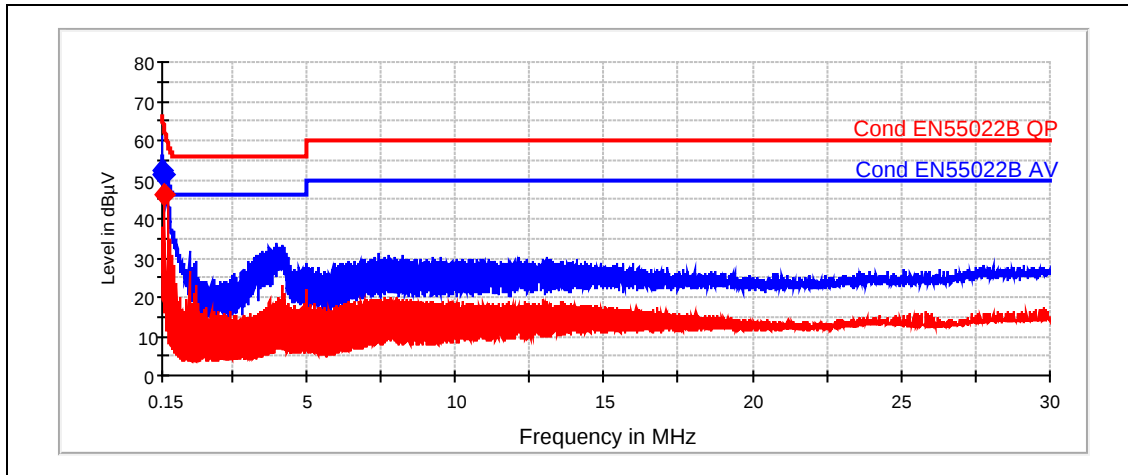

Quasi peak

Frequency [MHz]	Level [dBμV]	Meas. time[ms]	IF-BW[kHz]	Line	Margin	Result
0.15	52.44	15000	9	N	13.6	PASSED
0.155	51.24	15000	9	L1	14.53	PASSED
0.245	51.5	15000	9	N	10.42	PASSED

Average

Frequency [MHz]	Level [dBμV]	Meas. time[ms]	IF-BW[kHz]	Line	Margin	Result
0.245	46.24	15000	9	N	5.72	PASSED

3. Test Equipment

3.1. Conducted measurements

Eq. No	Equipment	Type	Manufacturer	Used in
-	RF Emission Software	ES-K1 v.1.71	R&S	22/24/27, 15C, 15B
BJPCHW0020	DC Power supply	Hp6632B	HP	22/24/27, 15C
BJPCPT0040	Receiver	ESCS30	R&S	15C,15B
BJPCPT0069	LISN 50 µH	ESH3-Z5	R&S	15C,15B
BJPCPT0073	Signal Generator	SMR 20	R&S	22/24/27, 15C, 15B
BJPCPT0079	LISN 50 µH	ESH3-Z5	R&S	15C,15B
BJPCPT0131	Communication Tester	CMU200	R&S	15C,15B
BJPCPT0191	Pulse Limiter	ESH3-Z2	R&S	15C,15B
BJPCTC0017	Communication Tester	CMU200	R&S	22/24/27, 15C, 15B
BJPCTC0067	Bluetooth Tester	CBT	R&S	22/24/27, 15C
BJPCTC0089	Temperature Test chamber	VT4002	Votsch industrietechnik	22/24/27, 15C
BJPCTC0090	FSP spectrum analyzer	FSP30	R&S	22/24/27, 15C
BJPCTC0094	GPB-RS232 convertor	GPB-RS232	NI	22/24/27, 15C

3.2. Radiated measurements

Eq. No	Equipment	Type	Manufacturer	Used in
-	BT / WLAN Antenna	SPA 2400/75/9/0/V	Huber-Suhner	15C, 15B
-	BT / WLAN Antenna	SPA 2400/75/9/0/V	Huber-Suhner	15C, 15B
-	RF Emission Software	ES-K1 v.1.71	R&S	22/24/27, 15C, 15B
BJPCPT0072	Receiver	ESI B26	R&S	22/24/27, 15C, 15B
BJPCPT0130	Relay Switch Unit	TS-RSP	R&S	22/24/27, 15C, 15B
BJPCPT0150	High Pass Filter	WHKS1200-10SS	Wainwright	22/24/27, 15C, 15B
BJPCPT0151	Band Reject Filter	WRCD1880/2000-0.2/40-5SSK	Wainwright	24, 15B
BJPCPT0154	Band Reject Filter	WRCT2402/2480-2400/2483.5-30-20SS	Wainwright	15C, 15B
BJPCPT0162	Antenna	HF906	R&S	22/24/27, 15C, 15B
BJPCTC0007	Antenna	HL562	R&S	22/24/27, 15C, 15B
BJPCTC0029	Antenna	HF906	R&S	22/24/27, 15C, 15B
BJPCTC0034	Band Reject Filter	WRCT 800/880-0.2/40-5SSK	Wainwright	22, 15B
BJPCTC0049	Preamplifier	Blma 0118-1A-Bt	Bonn	22/24/27, 15C, 15B
BJPCTC0055	Communication Tester	CMU200	R&S	22/24/27,15C,15B
BJPCTC0058	Bluetooth Tester	CBT	R&S	15C, 15B
BJPCTC0064	Band Reject Filter	WRCG1877/1883-1870/1890-40/6SS	Wainwright	24, 15B
BJPCTC0065	Band Reject Filter	WRCG832/838-825/845-40/5SS	Wainwright	27, 15B
BJPCTC0071	Multi-Device Controller	2090	EMCO	22/24/27, 15C, 15B
BJPCTC0072	Anechoic Chamber	3 m Semi / Full Anechoic Chamber	ETS	22/24/27, 15C, 15B
BJPCTC0073	MAST	Model-TR/POL	ETS	22/24/27, 15C, 15B
BJPCTC0074	MAST	Model 2070-2	ETS	22/24/27, 15C, 15B
BJPCTC0075	Turntable	Model 2188	ETS-EMCO	22/24/27, 15C, 15B
BJPCTC0096	Preamplifier	AFS4-00100300-20-23P-6	Miteq	22/24/27, 15C, 15B