


EXHIBIT B – Radiated Emissions Test Data

FCC ID M4D1010

Northwest EMC, Inc., Radiated and Conducted Emissions Data Sheets				Rev 3.3 10/09/99
EUT: LCS-TX	Serial Number: N/A	Job Number: CARD0026	Date: 11/08/00	
Manufacturer: Cardio Theatre	Test Engineer: Rod Peloquin	Job Site: EV01		
Customer Reference Number:	Software:	Power:		
Comments: Four Audio Devices to inputs, Unit modified to 27ohm output resistor				
<i>Rod Peloquin</i>		Temperature (°C): 21	% Humidity: 42	

FCC 15.209 Peak Radiated Emissions (3 meter limit)

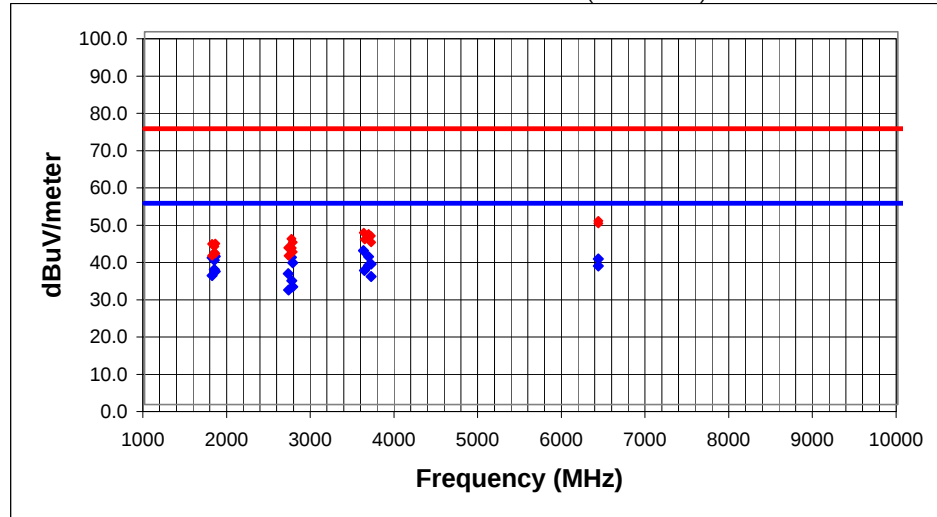


Frequency (MHz)	Meter Reading (dBuV)	Detector	Antenna Factor (dB/m)	Antenna Polarity	Preamp Gain (dB)	Cable Loss (dB)	Table Azimuth (degrees)	Antenna Height (meters)	Adjusted Level (dBuV/m)	Spec. Limit (dBuV/m)	Margin (dB)	Comment
3617.000	39.2	AV	31.9	VHRN	33.4	3.6	318.0	1.4	41.3	54.0	-12.8	Low Band
1844.000	43.9	AV	26.3	HHRN	32.9	2.4	200.0	1.7	39.7	54.0	-14.3	High Band
3677.600	37.6	AV	32.0	VHRN	33.5	3.6	345.0	1.3	39.7	54.0	-14.4	Mid Band
2753.900	40.8	AV	29.1	VHRN	33.4	3.0	10.0	1.7	39.5	54.0	-14.5	Mid Band
1807.270	44.4	AV	26.1	VHRN	33.4	2.3	179.0	1.3	39.4	54.0	-14.6	Low Band
6422.000	34.0	AV	34.4	HHRN	34.9	5.6	325.0	1.9	39.1	54.0	-15.0	Mid Band
1832.480	43.2	AV	26.2	VHRN	33.1	2.4	175.0	1.3	38.7	54.0	-15.3	Mid Band
2770.500	39.2	AV	29.1	VHRN	33.4	3.1	360.0	1.8	38.0	54.0	-16.0	High Band
3705.000	35.5	AV	32.1	VHRN	33.6	3.7	360.0	1.3	37.7	54.0	-16.3	High Band
3677.600	35.3	AV	32.0	HHRN	33.5	3.6	196.0	2.0	37.4	54.0	-16.7	Mid Band
6422.000	32.1	AV	34.4	VHRN	34.9	5.6	355.0	1.1	37.2	54.0	-16.8	Mid Band
1832.480	40.8	AV	26.2	HHRN	33.1	2.4	72.0	1.4	36.3	54.0	-17.8	Mid Band
3628.500	34.0	AV	31.9	HHRN	33.5	3.6	10.0	1.8	36.0	54.0	-18.0	Low Band
1844.000	39.9	AV	26.3	VHRN	32.9	2.4	195.0	1.3	35.7	54.0	-18.3	High Band
2717.450	36.7	AV	28.9	VHRN	33.5	3.0	353.0	1.6	35.1	54.0	-18.9	Low Band
1807.270	39.6	AV	26.1	HHRN	33.4	2.3	69.0	1.9	34.6	54.0	-19.5	Low Band
3705.000	32.1	AV	32.1	HHRN	33.6	3.7	163.0	1.9	34.3	54.0	-19.7	High Band
2758.200	34.5	AV	29.1	HHRN	33.4	3.0	352.0	1.4	33.2</			

Northwest EMC, Inc., Radiated and Conducted Emissions Data Sheets

Rev 3.3
10/09/99

EUT: LCS-TX	Serial Number: N/A	Job Number: CARD0026	Date: 11/08/00
Manufacturer: Cardio Theater	Test Engineer: Rod Peloquin	Job Site: EV01	
Customer Reference Number:	Software:	Power:	
Comments: 4 audio devices to inputs, power output resistor to 27 ohm, High band			
<i>Rod Peloquin</i>		Temperature (°C): 21	% Humidity: 42

FCC 15.249 (3 Meter Limit)

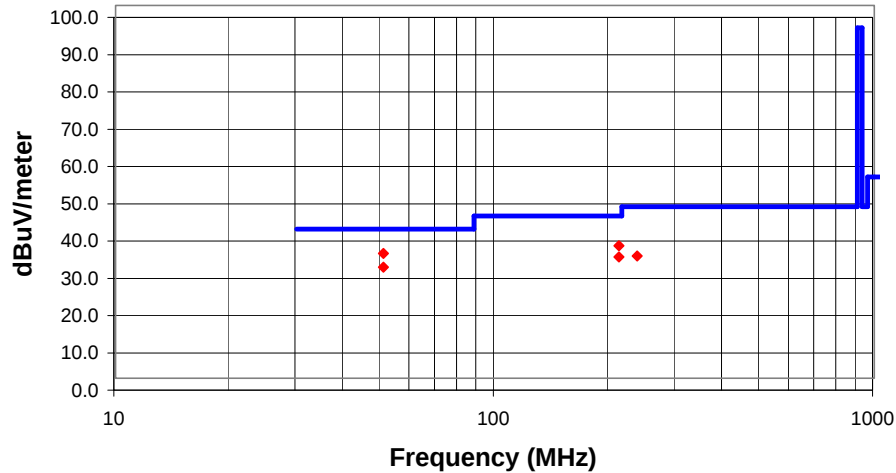

Frequency (MHz)	Meter Reading (dBuV)	Detector	Antenna Factor (dB/m)	Antenna Polarity	Preamplifier Gain (dB)	Cable Loss (dB)	Table Azimuth (degrees)	Antenna Height (meters)	Adjusted Level (dBuV/m)	Spec. Limit (dBuV/m)	Margin (dB)	Comment
50.800	58.0	PK	6.6	VBLG	31.6	0.5	130.0	1.8	33.5	40.0	-6.5	
212.310	55.0	PK	11.0	HBLG	31.3	0.8	261.0	1.4	35.5	43.5	-8.0	
50.800	54.3	PK	6.6	HBLG	31.6	0.5	145.0	3.9	29.8	40.0	-10.2	
212.311	52.0	PK	11.0	VBLG	31.3	0.8	79.0	1.0	32.5	43.5	-11.0	
237.188	51.4	PK	11.9	HBLG	31.3	0.8	178.0	1.3	32.8	46.0	-13.2	