

EXHIBIT D – Field Strength of Fundamental Test Data


FCC ID M4D1010

Northwest EMC, Inc., Radiated and Conducted Emissions Data Sheets

Rev 3.3
10/09/99

EUT: LCS-TX	Serial Number: N/A	Job Number: CARD0026	Date: 11/08/00
Manufacturer: Cardio Theater	Test Engineer: Rod Peloquin	Job Site: EV01	
Customer Reference Number:	Software:	Power:	
Comments: Four Audio Devices to inputs, unit modified to 27ohm power output resistor			
<i>Rocky Le Pelley</i>		Temperature (°C): 21	% Humidity: 42

FCC 15.249 (3 Meter Limit)

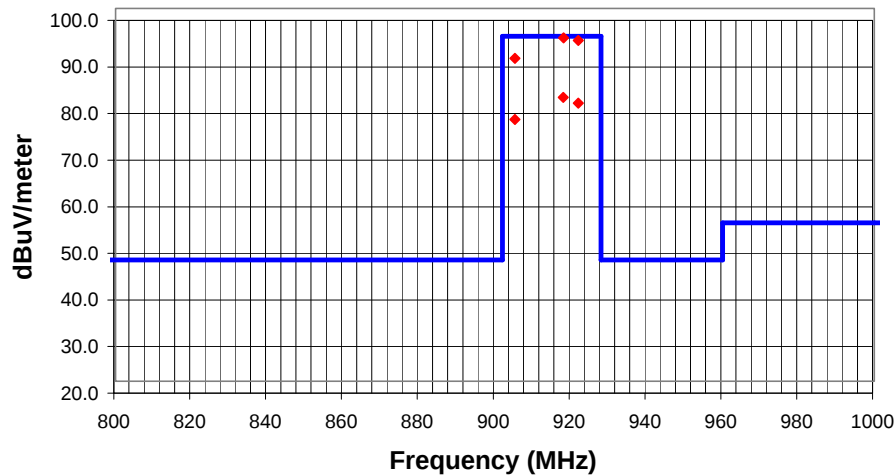

Frequency (MHz)	Meter Reading (dBuV)	Detector	Antenna Factor (dB/m)	Antenna Polarity	Preamplifier Gain (dB)	Cable Loss (dB)	Table Azimuth (degrees)	Antenna Height (meters)	Adjusted Level (dBuV/m)	Spec. Limit (dBuV/m)	Margin (dB)	Comment
918.056	68.6	PK	23.4	VBLG	0.0	1.7	199.0	1.0	93.7	94.0	-0.3	Mid Band
922.000	67.9	PK	23.5	VBLG	0.0	1.7	130.0	1.5	93.1	94.0	-0.9	High Band
905.300	64.3	PK	23.3	VBLG	0.0	1.7	207.0	1.0	89.3	94.0	-4.7	Low Band
918.000	55.8	PK	23.4	HBLG	0.0	1.7	214.0	1.0	80.9	94.0	-13.1	Mid Band
922.000	54.5	PK	23.5	HBLG	0.0	1.7	213.0	1.0	79.7	94.0	-14.3	High Band
905.300	51.2	PK	23.3	HBLG	0.0	1.7	188.0	1.0	76.2	94.0	-17.8	Low Band