

Note:

- a. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
- b. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
- c. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle $< 98\%$) or 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.

Peak

Frequency	RBW	VBW
9 kHz~150 kHz	200 Hz	600 Hz
150 kHz~30 MHz	10 kHz	30 kHz
30 MHz~1 GHz	120 kHz	360 kHz
Above 1GHz	1 MHz	3 MHz

Average for above 1GHz

RBW	VBW
1MHz	Refer to section 6.6 for duty cycle.

- d. All modes of operation were investigated (includes all external accessories) and the worst-case emissions are reported, the other emission levels were low against the limit.
- e. Test data of Result value (dBuV/m) = Reading value (dBuV/m) + Correction Factor (dB/m).
- f. Test data of Margin(dB) = Result value (dBuV/m) - Limit value (dBuV/m).
- g. Test data of Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamp Factor (dB).
- h. Test data of Notation "@" = Fundamental Frequency
- i. Test data of Notation "*" = The peak result under 20 dB above and complies with AVG limit, AVG result is deemed to comply with AVG limit.

Underwriters Laboratories Taiwan Co., Ltd.

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

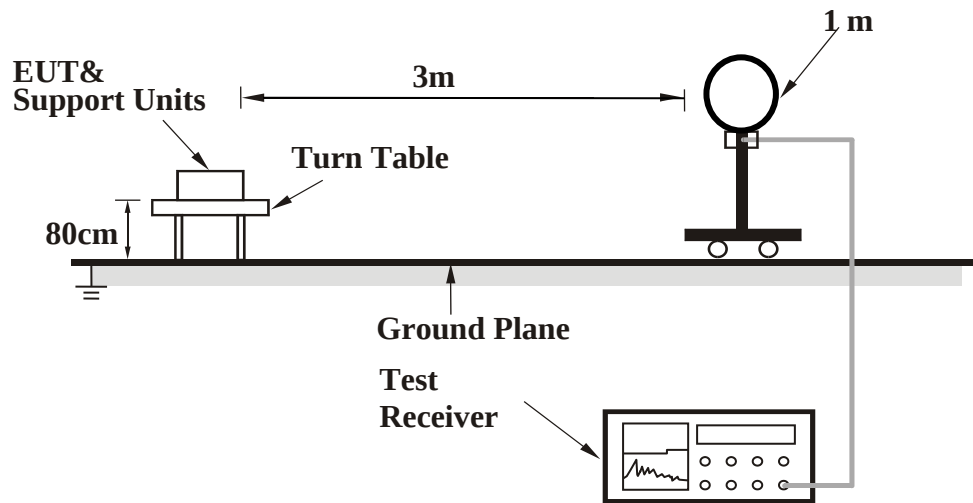
Telephone : +886-2-7737-3000

Facsimile (FAX) : +886-3-583-7948


Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

Test Setup

<Frequency Range 9 kHz ~ 30 MHz>



<Frequency Range 30 MHz ~ 1 GHz >

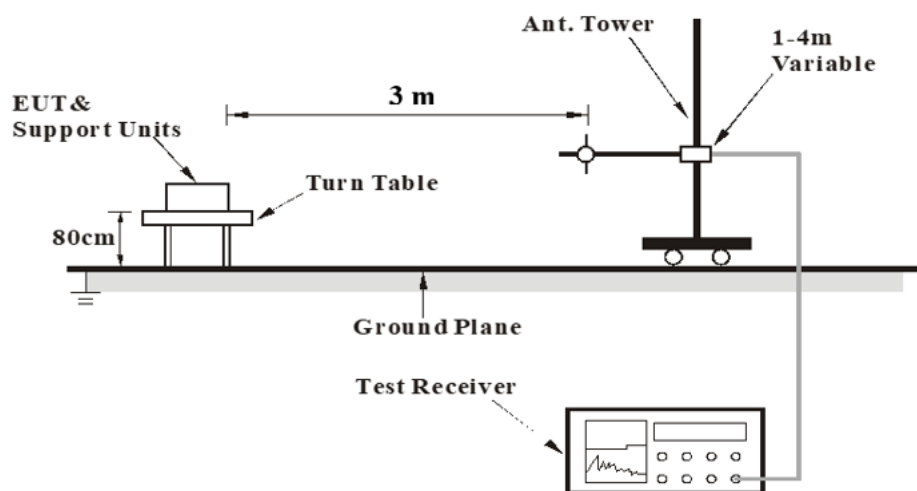

Underwriters Laboratories Taiwan Co., Ltd.

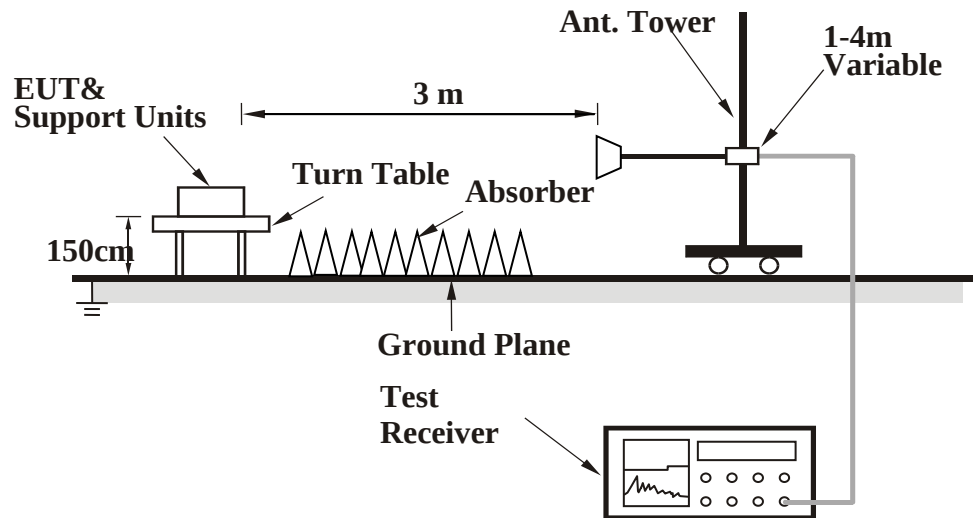
Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone : +886-2-7737-3000

Facsimile (FAX) : +886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

<Frequency Range above 1 GHz>



For the actual test configuration, please refer to the Setup Configurations.

Test Data

Above 1 GHz

Mode	BT-LE-1Mbps	Channel	0
------	-------------	---------	---

Polarization	Notation	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
Horizontal		2322.73	41.96	12.77	54.73	74	-19.27	PK
		2325.01	31.47	12.76	44.23	54	-9.77	AVG
	@	2402	91.95	12.43	104.38	N/A	N/A	PK
	@	2402	91.48	12.43	103.91	N/A	N/A	AVG
	*	4804	41.6	2.65	44.25	74	-29.75	PK
Vertical		2322.73	40.98	12.77	53.75	74	-20.25	PK
		2322.92	30.37	12.77	43.14	54	-10.86	AVG
	@	2402	101.81	12.43	114.24	N/A	N/A	PK
	@	2402	101.09	12.43	113.52	N/A	N/A	AVG
	*	4804	40.07	2.65	42.72	74	-31.28	PK

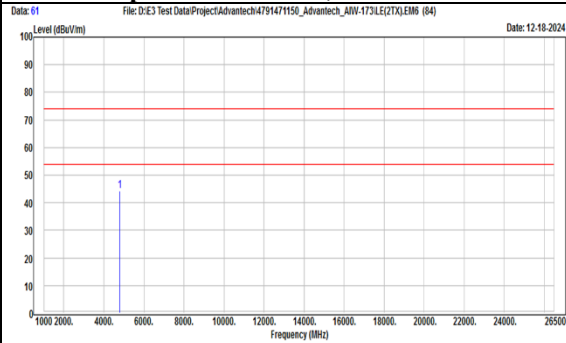
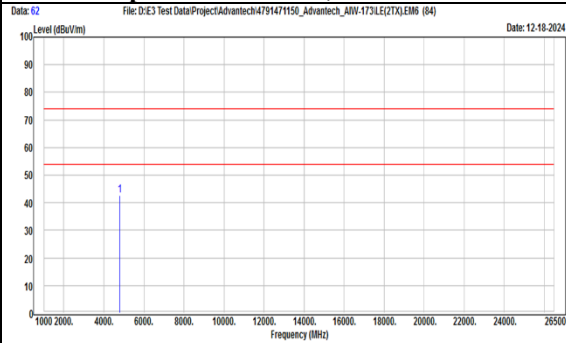
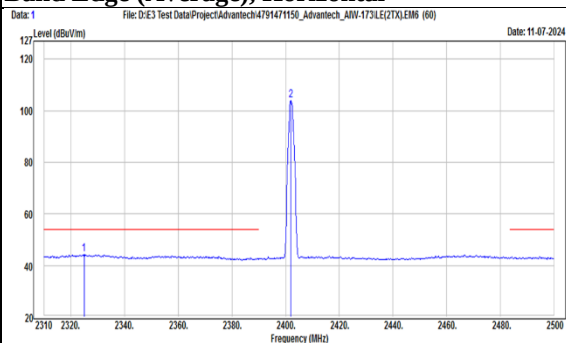
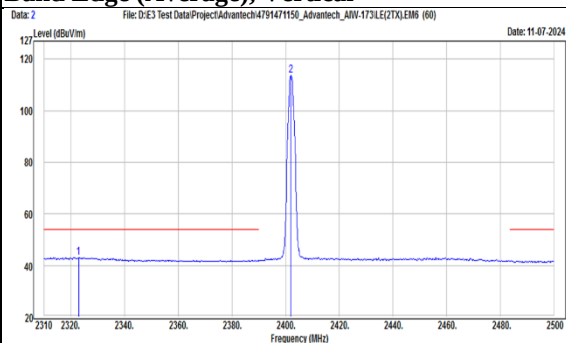
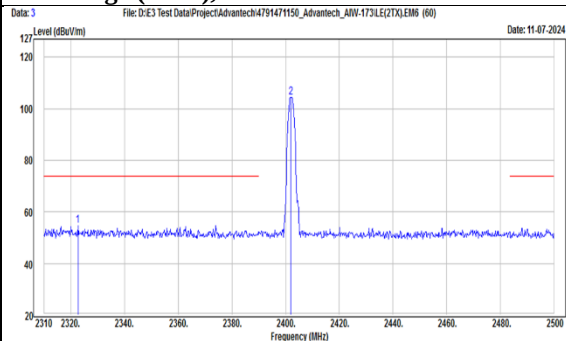
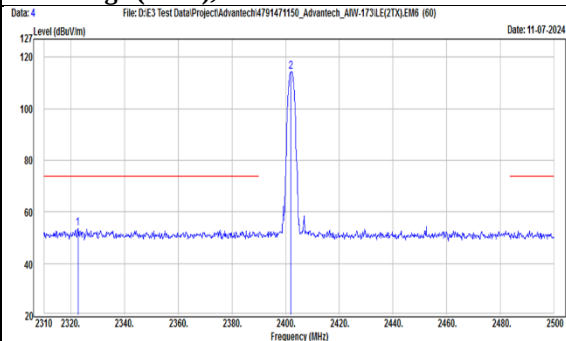
Underwriters Laboratories Taiwan Co., Ltd.

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone : +886-2-7737-3000

Facsimile (FAX) : +886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

TX, BT-LE-1Mbps (Ch 0)
Radiated Spurious Emission, Horizontal

TX, BT-LE-1Mbps (Ch 0)
Radiated Spurious Emission, Vertical

TX, BT-LE-1Mbps (Ch 0)
Band Edge (Average), Horizontal

TX, BT-LE-1Mbps (Ch 0)
Band Edge (Average), Vertical

TX, BT-LE-1Mbps (Ch 0)
Band Edge (Peak), Horizontal

TX, BT-LE-1Mbps (Ch 0)
Band Edge (Peak), Vertical


Mode	BT-LE-1Mbps	Channel	19
------	-------------	---------	----

Polarization	Notation	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
Horizontal		2319.88	31.21	12.78	43.99	54	-10.01	AVG
		2389.23	42.13	12.49	54.62	74	-19.38	PK
	@	2440	89.49	12.19	101.68	N/A	N/A	PK
	@	2440	89.01	12.19	101.2	N/A	N/A	AVG
		2487.65	42.04	12.42	54.46	74	-19.54	PK
		2493.92	30.66	12.46	43.12	54	-10.88	AVG
	*	4880	41.12	2.7	43.82	74	-30.18	PK
	*	7320	33.03	10.6	43.63	74	-30.37	PK
Vertical		2319.5	42.44	12.78	55.22	74	-18.78	PK
		2322.73	30.37	12.77	43.14	54	-10.86	AVG
	@	2440	100.57	12.19	112.76	N/A	N/A	PK
	@	2440	99.99	12.19	112.18	N/A	N/A	AVG
		2484.04	29.48	12.38	41.86	54	-12.14	AVG
		2494.87	40.66	12.47	53.13	74	-20.87	PK
	*	4880	39.16	2.7	41.86	74	-32.14	PK
	*	7320	32.85	10.6	43.45	74	-30.55	PK

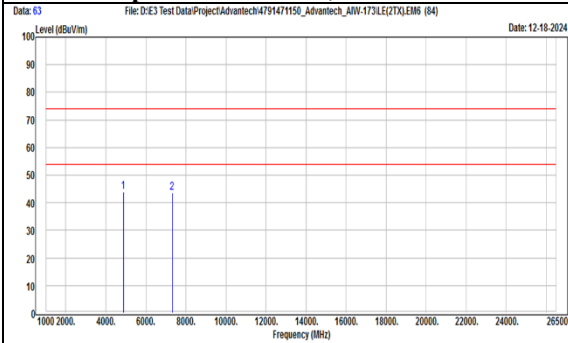
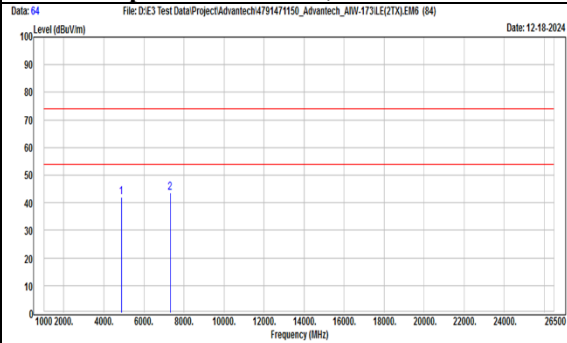
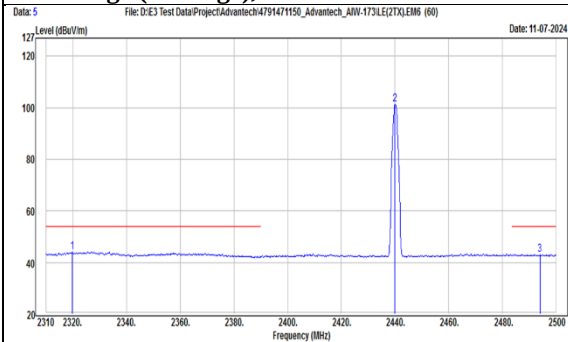
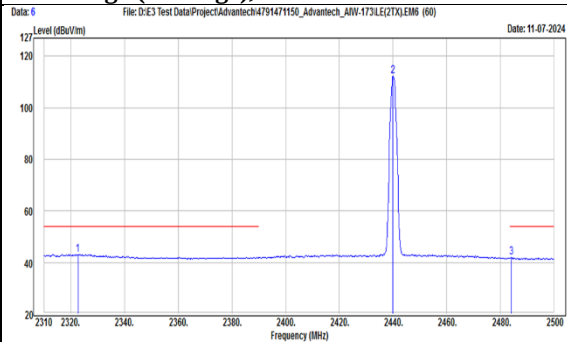
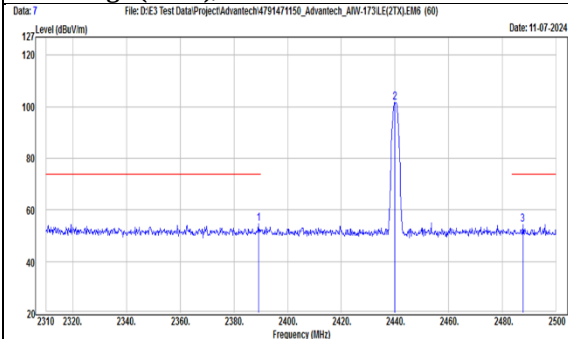
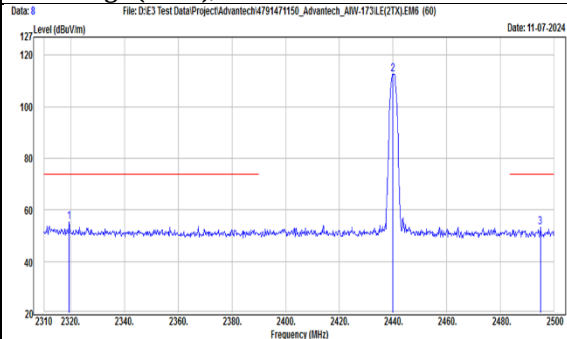
Underwriters Laboratories Taiwan Co., Ltd.

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

TX, BT-LE-1Mbps (Ch 19)
Radiated Spurious Emission, Horizontal

TX, BT-LE-1Mbps (Ch 19)
Radiated Spurious Emission, Vertical

TX, BT-LE-1Mbps (Ch 19)
Band Edge (Average), Horizontal

TX, BT-LE-1Mbps (Ch 19)
Band Edge (Average), Vertical

TX, BT-LE-1Mbps (Ch 19)
Band Edge (Peak), Horizontal

TX, BT-LE-1Mbps (Ch 19)
Band Edge (Peak), Vertical


Mode	BT-LE-1Mbps	Channel	39
------	-------------	---------	----

Polarization	Notation	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
Horizontal	@	2480	89.89	12.35	102.24	N/A	N/A	PK
	@	2480	89.56	12.35	101.91	N/A	N/A	AVG
		2484.99	40.4	12.39	52.79	74	-21.21	PK
		2491.26	30.84	12.44	43.28	54	-10.72	AVG
	*	4960	39.93	2.84	42.77	74	-31.23	PK
	*	7440	33.63	11.04	44.67	74	-29.33	PK
Vertical	@	2480	99.6	12.35	111.95	N/A	N/A	PK
	@	2480	99.23	12.35	111.58	N/A	N/A	AVG
		2483.85	29.69	12.38	42.07	54	-11.93	AVG
		2498.67	40.19	12.5	52.69	74	-21.31	PK
	*	4960	39.6	2.84	42.44	74	-31.56	PK
	*	7440	34.61	11.04	45.65	74	-28.35	PK

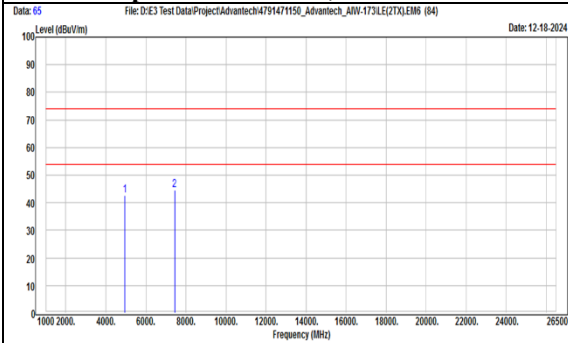
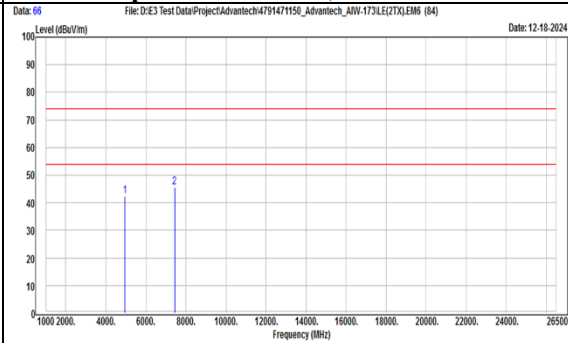
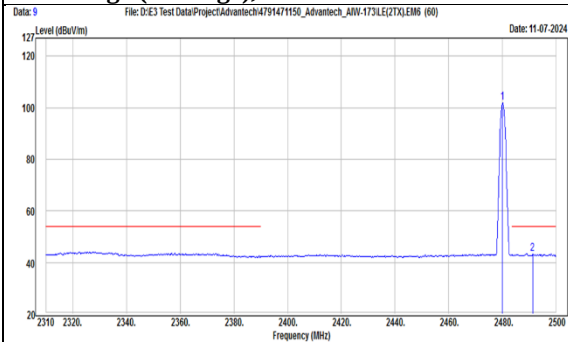
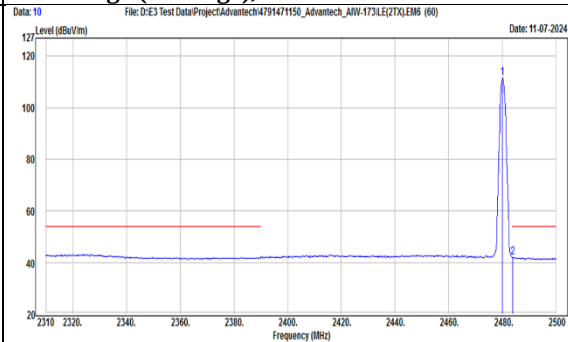
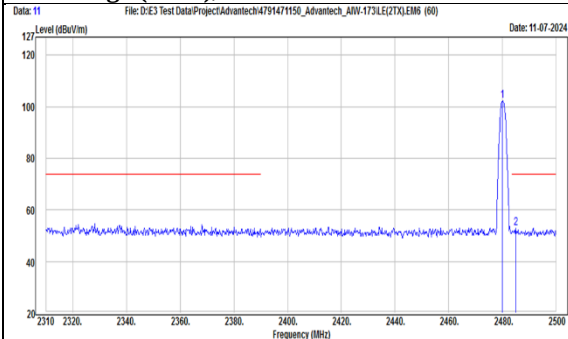
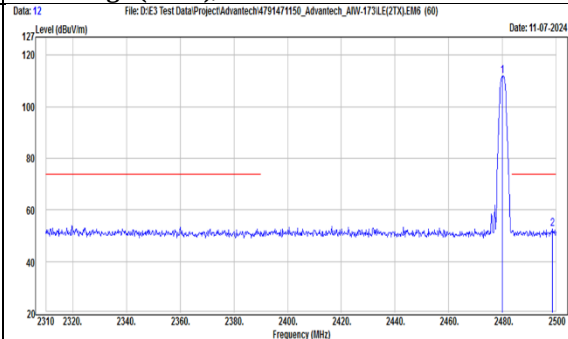
Underwriters Laboratories Taiwan Co., Ltd.

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

TX, BT-LE-1Mbps (Ch 39)
Radiated Spurious Emission, Horizontal

TX, BT-LE-1Mbps (Ch 39)
Radiated Spurious Emission, Vertical

TX, BT-LE-1Mbps (Ch 39)
Band Edge (Average), Horizontal

TX, BT-LE-1Mbps (Ch 39)
Band Edge (Average), Vertical

TX, BT-LE-1Mbps (Ch 39)
Band Edge (Peak), Horizontal

TX, BT-LE-1Mbps (Ch 39)
Band Edge (Peak), Vertical


Mode	BT-LE-2Mbps	Channel	0
------	-------------	---------	---

Polarization	Notation	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
Horizontal		2326.15	31.49	12.76	44.25	54	-9.75	AVG
		2343.82	41.59	12.68	54.27	74	-19.73	PK
	@	2402	87.41	12.43	99.84	N/A	N/A	PK
	@	2402	85.27	12.43	97.7	N/A	N/A	AVG
	*	4804	42.42	2.65	45.07	74	-28.93	PK
Vertical		2326.72	30.59	12.76	43.35	54	-10.65	AVG
		2337.74	41	12.71	53.71	74	-20.29	PK
	@	2402	97.49	12.43	109.92	N/A	N/A	PK
	@	2402	95.32	12.43	107.75	N/A	N/A	AVG
	*	4804	38.92	2.65	41.57	74	-32.43	PK

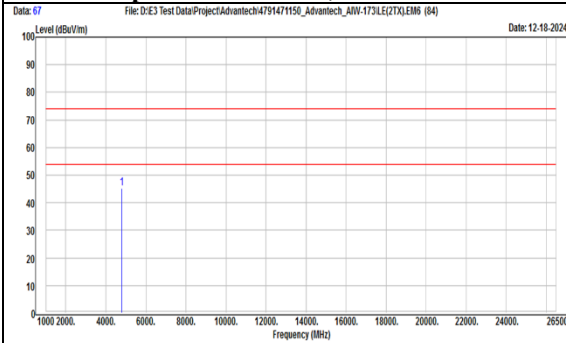
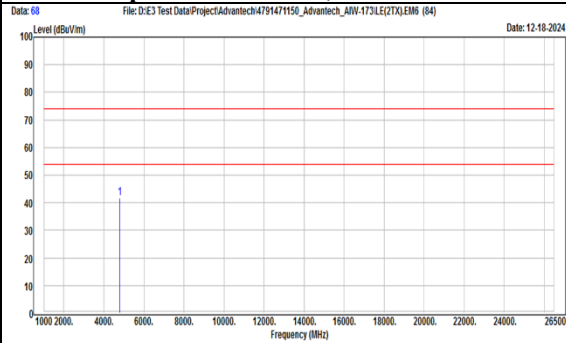
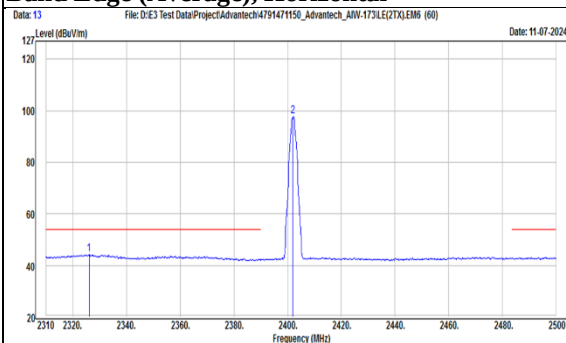
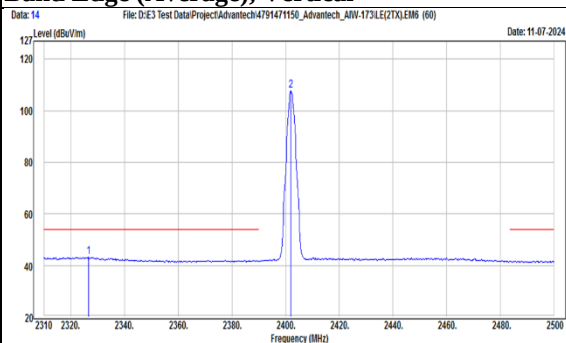
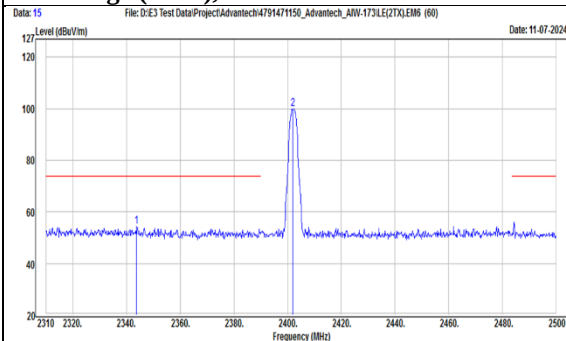
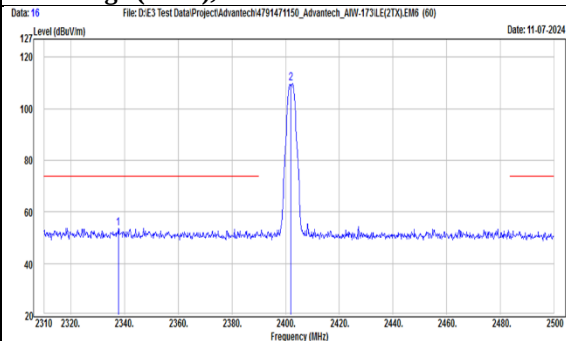
Underwriters Laboratories Taiwan Co., Ltd.

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

TX, BT-LE-2Mbps (Ch 0)
Radiated Spurious Emission, Horizontal

TX, BT-LE-2Mbps (Ch 0)
Radiated Spurious Emission, Vertical

TX, BT-LE-2Mbps (Ch 0)
Band Edge (Average), Horizontal

TX, BT-LE-2Mbps (Ch 0)
Band Edge (Average), Vertical

TX, BT-LE-2Mbps (Ch 0)
Band Edge (Peak), Horizontal

TX, BT-LE-2Mbps (Ch 0)
Band Edge (Peak), Vertical


Mode	BT-LE-2Mbps	Channel	19
------	-------------	---------	----

Polarization	Notation	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
Horizontal		2324.63	31.28	12.76	44.04	54	-9.96	AVG
		2336.41	41.08	12.72	53.8	74	-20.2	PK
	@	2440	85.4	12.19	97.59	N/A	N/A	PK
	@	2440	83.36	12.19	95.55	N/A	N/A	AVG
		2487.08	40.97	12.41	53.38	74	-20.62	PK
		2496.2	30.71	12.48	43.19	54	-10.81	AVG
	*	4880	43.2	2.7	45.9	74	-28.1	PK
	*	7320	32.98	10.6	43.58	74	-30.42	PK
Vertical		2314.75	41	12.8	53.8	74	-20.2	PK
		2322.54	30.65	12.77	43.42	54	-10.58	AVG
	@	2440	95.57	12.19	107.76	N/A	N/A	PK
	@	2440	93.66	12.19	105.85	N/A	N/A	AVG
		2495.82	39.91	12.47	52.38	74	-21.62	PK
		2499.43	29.2	12.51	41.71	54	-12.29	AVG
	*	4880	39.3	2.7	42	74	-32	PK
	*	7320	33.44	10.6	44.04	74	-29.96	PK

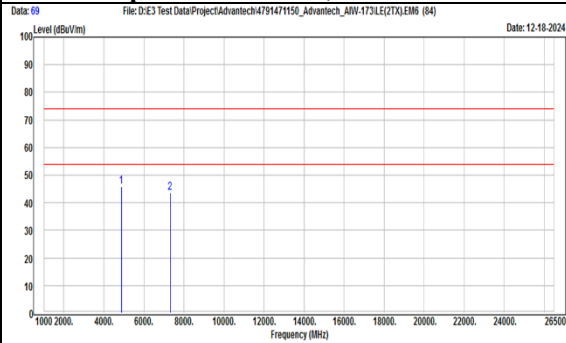
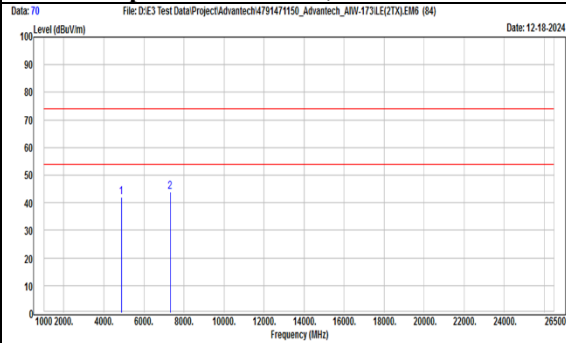
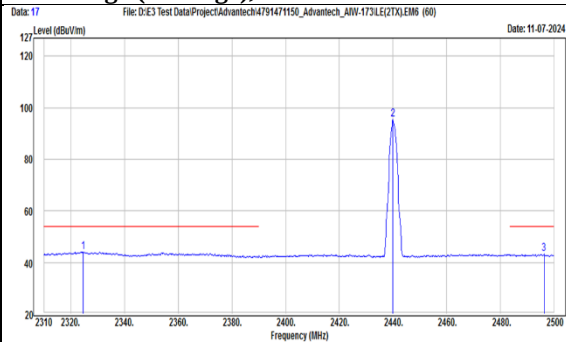
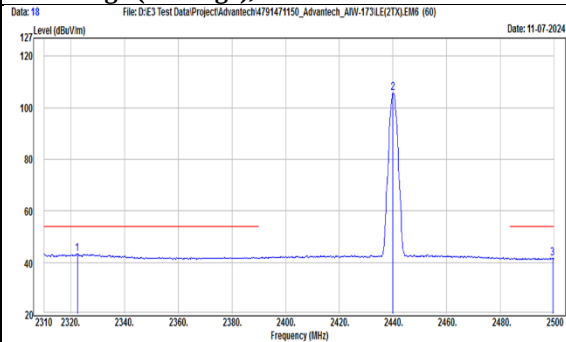
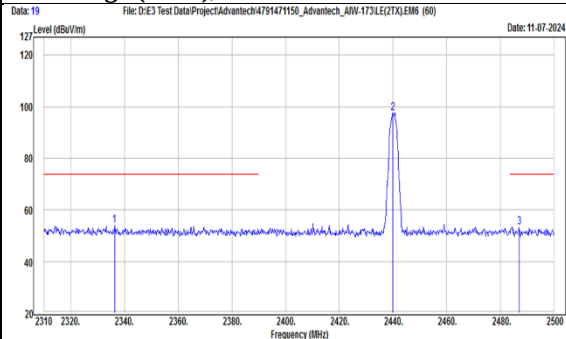
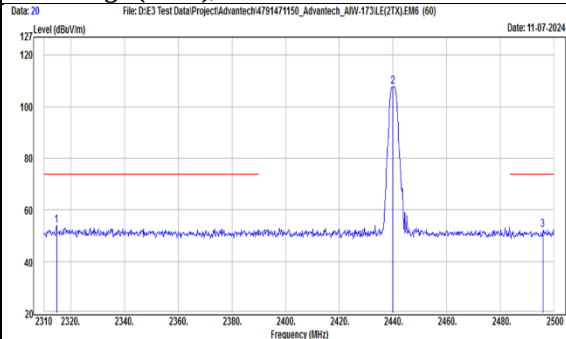
Underwriters Laboratories Taiwan Co., Ltd.

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

TX, BT-LE-2Mbps (Ch 19)
Radiated Spurious Emission, Horizontal

TX, BT-LE-2Mbps (Ch 19)
Radiated Spurious Emission, Vertical

TX, BT-LE-2Mbps (Ch 19)
Band Edge (Average), Horizontal

TX, BT-LE-2Mbps (Ch 19)
Band Edge (Average), Vertical

TX, BT-LE-2Mbps (Ch 19)
Band Edge (Peak), Horizontal

TX, BT-LE-2Mbps (Ch 19)
Band Edge (Peak), Vertical


Mode	BT-LE-2Mbps	Channel	39
------	-------------	---------	----

Polarization	Notation	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
Horizontal	@	2480	86.54	12.35	98.89	N/A	N/A	PK
	@	2480	84.09	12.35	96.44	N/A	N/A	AVG
		2492.59	41.33	12.46	53.79	74	-20.21	PK
		2493.35	30.95	12.46	43.41	54	-10.59	AVG
	*	4960	39.59	2.84	42.43	74	-31.57	PK
	*	7440	32.43	11.04	43.47	74	-30.53	PK
Vertical	@	2480	95.72	12.35	108.07	N/A	N/A	PK
	@	2480	93.58	12.35	105.93	N/A	N/A	AVG
		2483.66	31.36	12.38	43.74	54	-10.26	AVG
		2484.42	43.12	12.39	55.51	74	-18.49	PK
	*	4960	40.73	2.84	43.57	74	-30.43	PK
	*	7440	33.34	11.04	44.38	74	-29.62	PK

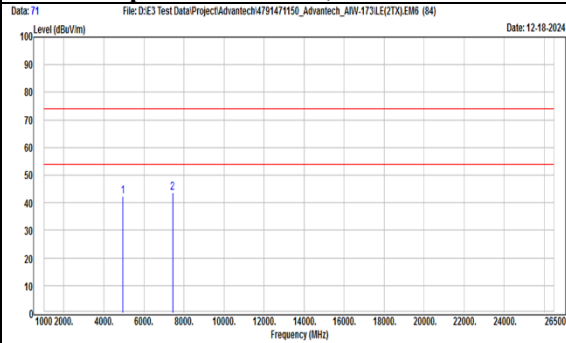
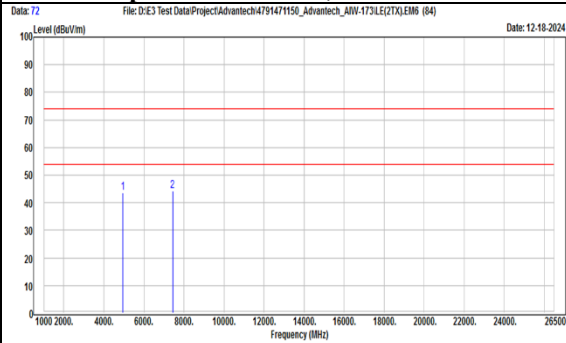
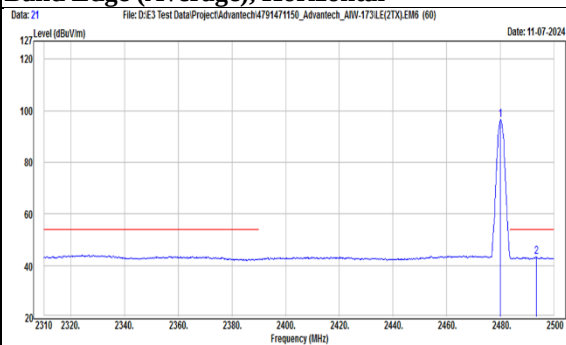
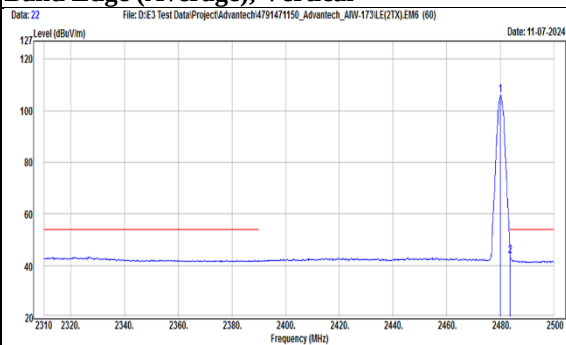
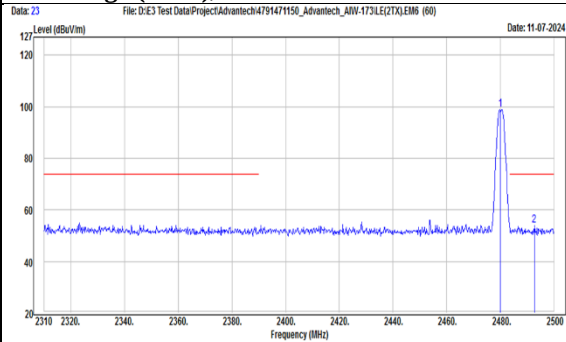
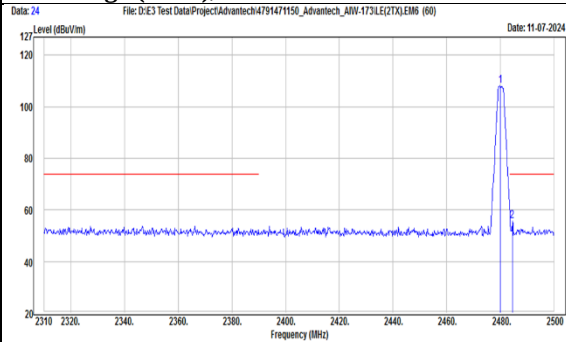
Underwriters Laboratories Taiwan Co., Ltd.

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

TX, BT-LE-2Mbps (Ch 39)
Radiated Spurious Emission, Horizontal

TX, BT-LE-2Mbps (Ch 39)
Radiated Spurious Emission, Vertical

TX, BT-LE-2Mbps (Ch 39)
Band Edge (Average), Horizontal

TX, BT-LE-2Mbps (Ch 39)
Band Edge (Average), Vertical

TX, BT-LE-2Mbps (Ch 39)
Band Edge (Peak), Horizontal

TX, BT-LE-2Mbps (Ch 39)
Band Edge (Peak), Vertical


Mode	BT-LR	Channel	0
------	-------	---------	---

Polarization	Notation	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
Horizontal		2324.44	41.57	12.76	54.33	74	-19.67	PK
		2324.44	31.38	12.76	44.14	54	-9.86	AVG
	@	2402	87.61	12.43	100.04	N/A	N/A	PK
	@	2402	86.77	12.43	99.2	N/A	N/A	AVG
	*	4804	40.71	2.65	43.36	74	-30.64	PK
Vertical		2319.69	41.86	12.78	54.64	74	-19.36	PK
		2328.62	30.25	12.75	43	54	-11	AVG
	@	2402	97.26	12.43	109.69	N/A	N/A	PK
	@	2402	96.71	12.43	109.14	N/A	N/A	AVG
	*	4804	39.77	2.65	42.42	74	-31.58	PK

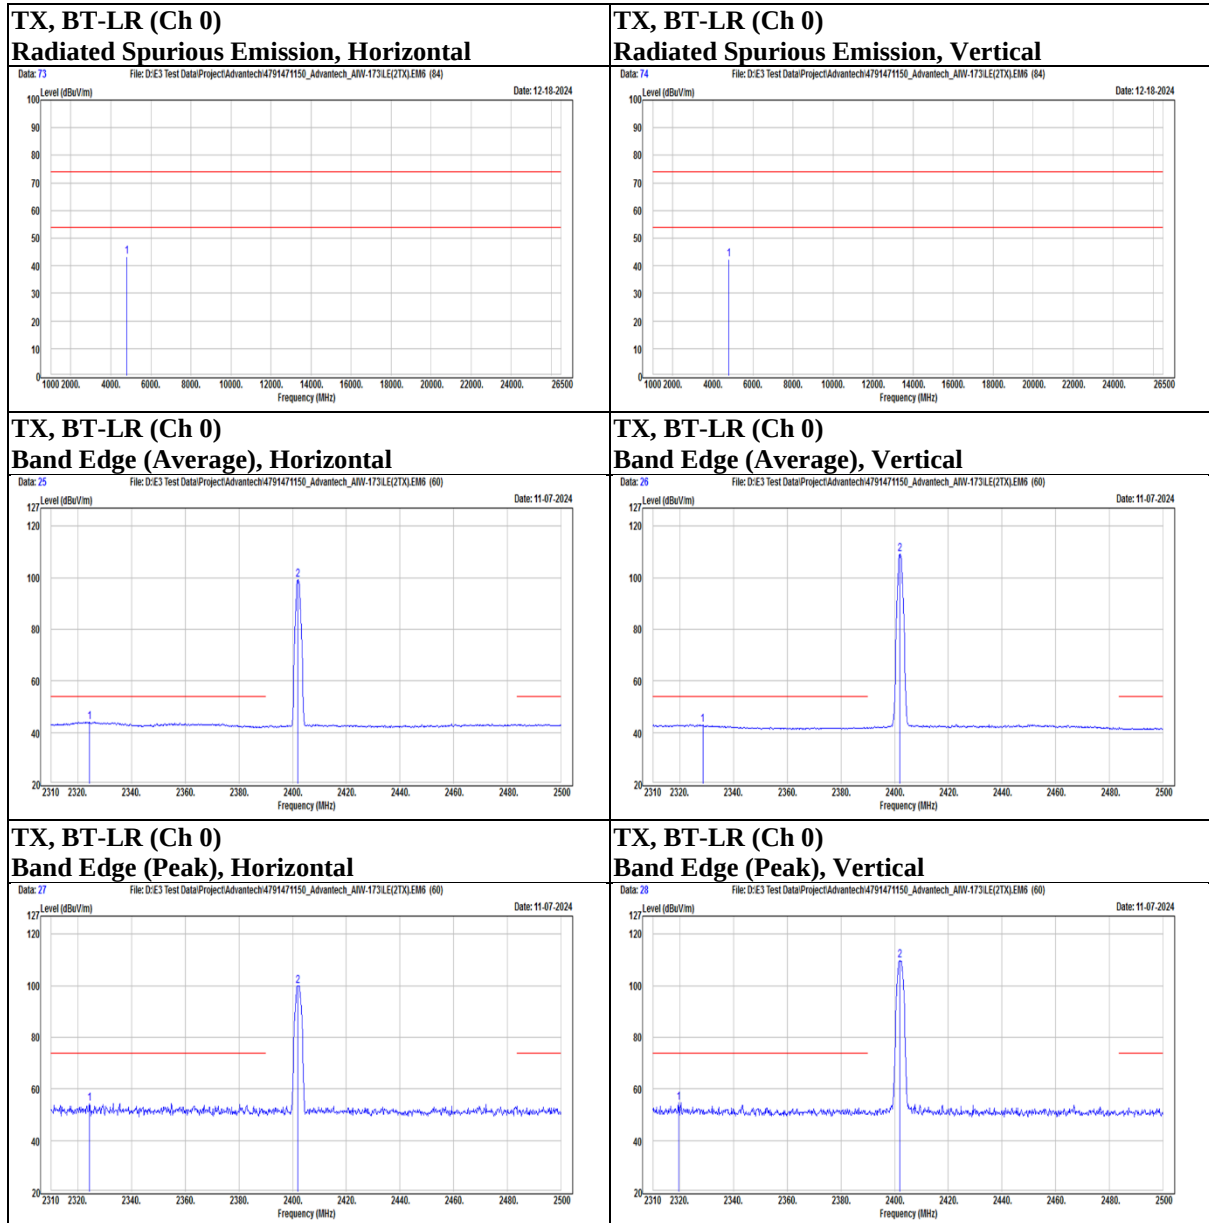
Underwriters Laboratories Taiwan Co., Ltd.

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1



Mode	BT-LR	Channel	19
------	-------	---------	----

Polarization	Notation	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
Horizontal		2313.23	42.11	12.81	54.92	74	-19.08	PK
		2323.87	31.17	12.77	43.94	54	-10.06	AVG
	@	2440	85.3	12.19	97.49	N/A	N/A	PK
	@	2440	84.73	12.19	96.92	N/A	N/A	AVG
		2491.45	41.74	12.44	54.18	74	-19.82	PK
		2496.96	30.7	12.48	43.18	54	-10.82	AVG
	*	4880	41.7	2.7	44.4	74	-29.6	PK
	*	7320	33.34	10.6	43.94	74	-30.06	PK
Vertical		2322.54	42.25	12.77	55.02	74	-18.98	PK
		2326.91	30.38	12.76	43.14	54	-10.86	AVG
	@	2440	96.12	12.19	108.31	N/A	N/A	PK
	@	2440	95.31	12.19	107.5	N/A	N/A	AVG
		2483.85	29.39	12.38	41.77	54	-12.23	AVG
		2492.78	40.6	12.46	53.06	74	-20.94	PK
	*	4880	39.8	2.7	42.5	74	-31.5	PK
	*	7320	33.39	10.6	43.99	74	-30.01	PK

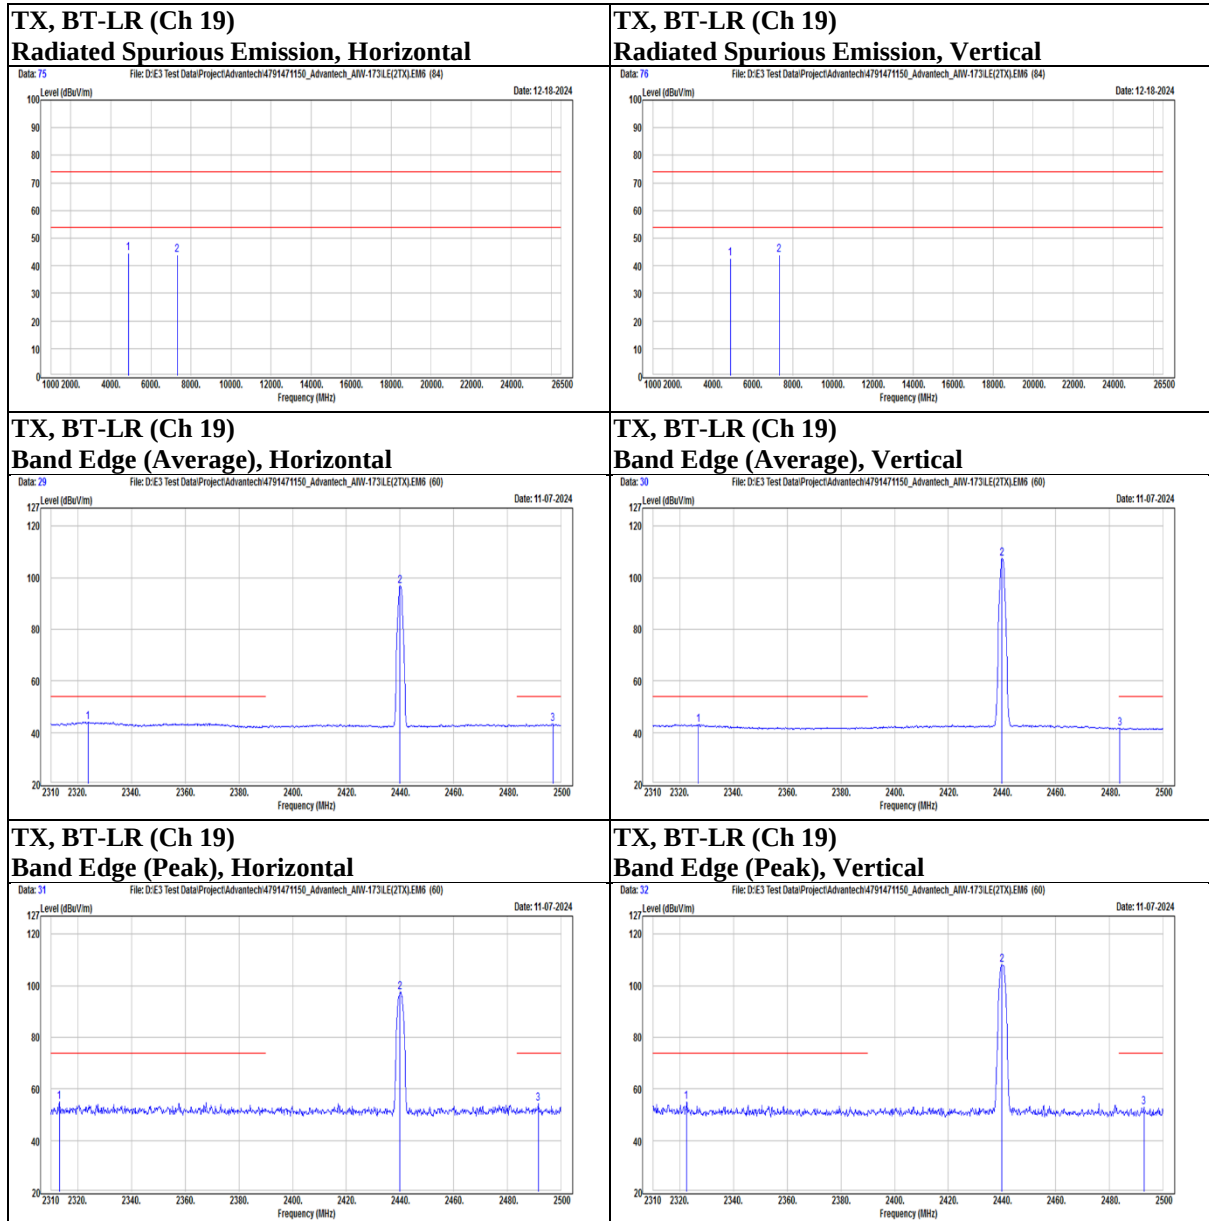
Underwriters Laboratories Taiwan Co., Ltd.

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1



Mode	BT-LR	Channel	39
------	-------	---------	----

Polarization	Notation	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
Horizontal	@	2480	86.45	12.35	98.8	N/A	N/A	PK
	@	2480	85.26	12.35	97.61	N/A	N/A	AVG
		2495.63	30.68	12.47	43.15	54	-10.85	AVG
		2496.77	41.42	12.48	53.9	74	-20.1	PK
	*	4960	38.77	2.84	41.61	74	-32.39	PK
	*	7440	32.44	11.04	43.48	74	-30.52	PK
Vertical	@	2480	95.28	12.35	107.63	N/A	N/A	PK
	@	2480	94.74	12.35	107.09	N/A	N/A	AVG
		2483.66	29.52	12.38	41.9	54	-12.1	AVG
		2495.25	40.24	12.47	52.71	74	-21.29	PK
	*	4960	39.11	2.84	41.95	74	-32.05	PK
	*	7440	33.24	11.04	44.28	74	-29.72	PK

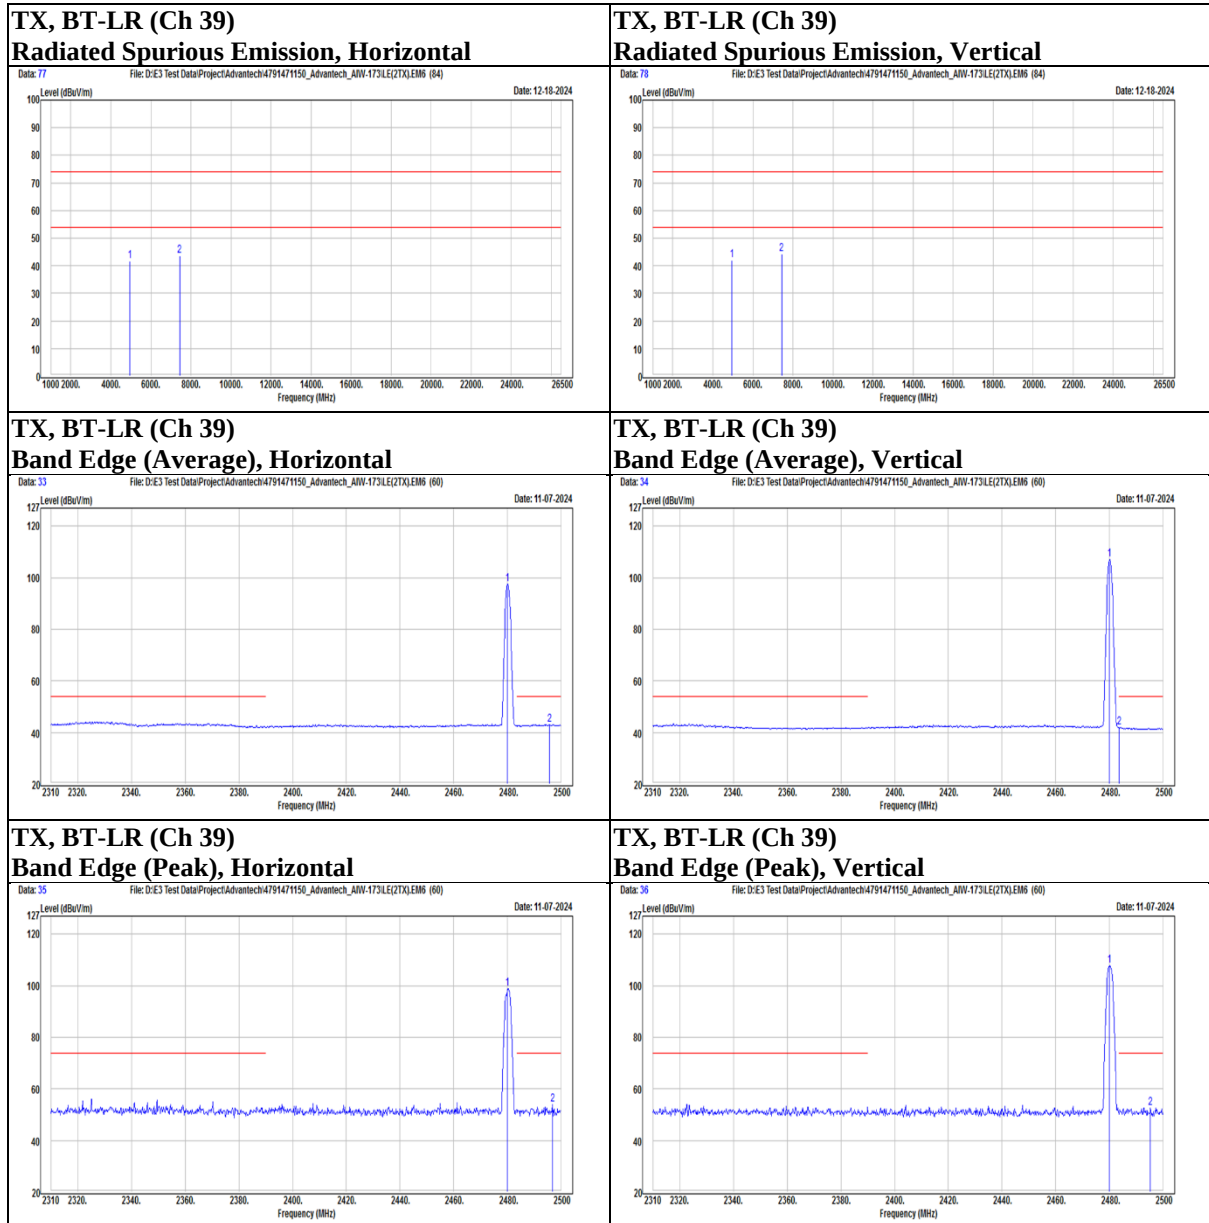
Underwriters Laboratories Taiwan Co., Ltd.

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948


Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1



Below 1 GHz

Mode	BT-LE-1Mbps	Channel	39
------	-------------	---------	----

Polarization	Notation	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
Horizontal		98.87	53.27	-16.53	36.74	43.5	-6.76	PK
		299.66	49.98	-10.49	39.49	46	-6.51	PK
		399.57	47.34	-7.63	39.71	46	-6.29	PK
		497.54	44.13	-5.01	39.12	46	-6.88	PK
		600.36	41.64	-2.39	39.25	46	-6.75	PK
		699.3	39.74	-0.63	39.11	46	-6.89	PK
Vertical		98.87	53.66	-16.53	37.13	43.5	-6.37	PK
		298.69	48.6	-10.49	38.11	46	-7.89	PK
		408.3	46.94	-7.38	39.56	46	-6.44	PK
		503.36	43.96	-4.86	39.1	46	-6.9	PK
		551.86	43.11	-3.97	39.14	46	-6.86	PK
		600.36	41.93	-2.39	39.54	46	-6.46	PK

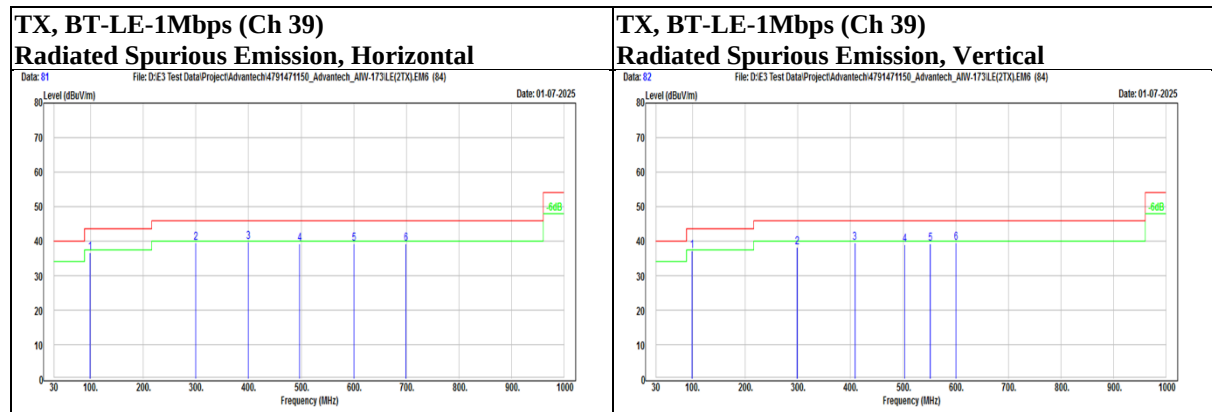

Underwriters Laboratories Taiwan Co., Ltd.

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan
Telephone : +886-2-7737-3000
Facsimile (FAX) : +886-3-583-7948

9 kHz ~ 30 MHz Data:

For 9 kHz to 30 MHz radiated emission have performed all modes of operation were investigated. The amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required to be report.

No non-compliance noted:

KDB 414788 D01 OATS and Chamber Correlation Justification

- Base on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field.

- OATs and chamber correlation testing had been performed and chamber measured test results is the worst case test result.

Although these tests were performed other than open area test site, adequate comparison measurements were confirmed against 30m open area test site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 414788.

Underwriters Laboratories Taiwan Co., Ltd.

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone : +886-2-7737-3000

Facsimile (FAX) : +886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

9.6. AC Power Line Conducted Emission

Requirements

Frequency (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note:

1. The lower limit shall apply at the transition frequencies.
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

Test Procedures

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.
2. All modes of operation were investigated (includes all external accessories) and the worst-case emissions are reported, the other emission levels were low against the limit.
3. Test data of Result value (dB μ V) = Reading value (dB μ V) + Correction Factor (dB).
4. Test data of Margin(dB) = Result value (dB μ V) - Limit value (dB μ V).
5. Test data of Correction Factor (dB) = Insertion loss(dB) + Cable loss(dB).

Underwriters Laboratories Taiwan Co., Ltd.

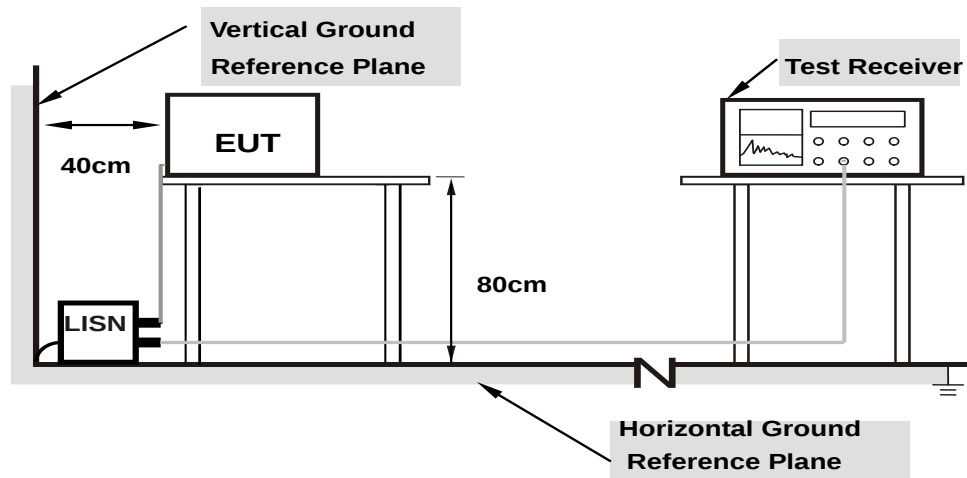
Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone : +886-2-7737-3000

Facsimile (FAX) : +886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

Test Setup




Note: 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the Setup Configurations.

Test Data

Mode	LE1M_TX2480	Channel	39
------	-------------	---------	----

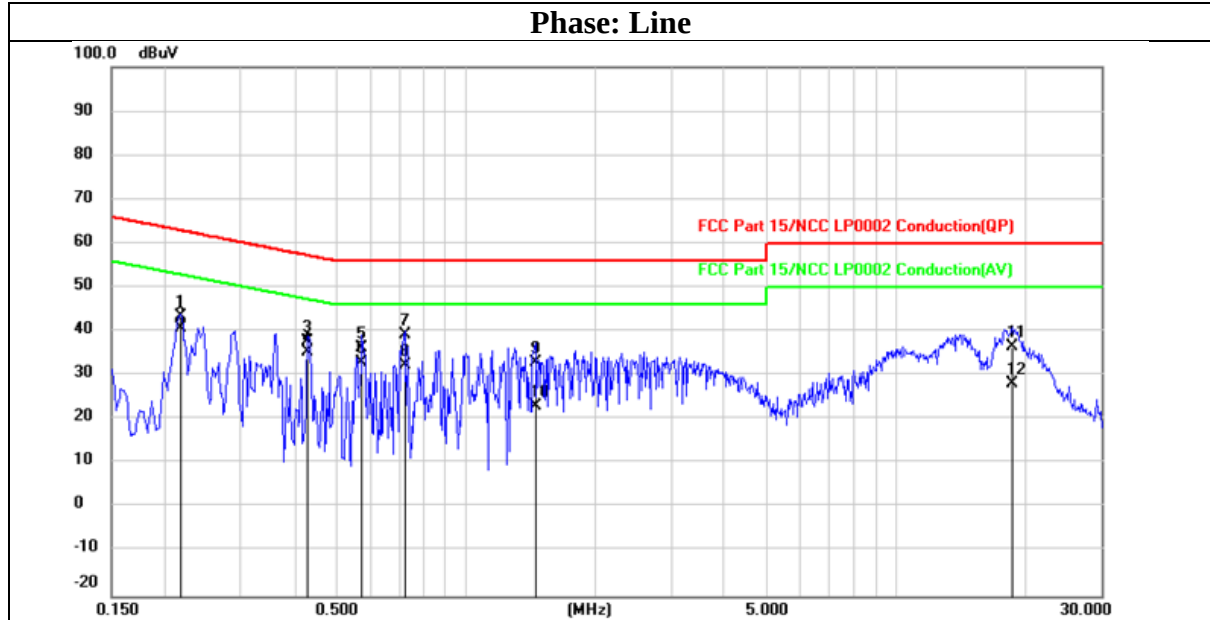

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.2180	33.45	9.96	43.41	62.89	-19.48	QP
2	0.2180	30.66	9.96	40.62	52.89	-12.27	AVG
3	0.4300	27.81	9.96	37.77	57.25	-19.48	QP
4	0.4300	25.33	9.96	35.29	47.25	-11.96	AVG
5	0.5740	26.28	9.98	36.26	56.00	-19.74	QP
6	0.5740	22.93	9.98	32.91	46.00	-13.09	AVG
7	0.7220	29.40	9.98	39.38	56.00	-16.62	QP
8	0.7220	22.33	9.98	32.31	46.00	-13.69	AVG
9	1.4500	22.92	10.01	32.93	56.00	-23.07	QP
10	1.4500	12.93	10.01	22.94	46.00	-23.06	AVG
11	18.6380	26.03	10.49	36.52	60.00	-23.48	QP
12	18.6380	17.69	10.49	28.18	50.00	-21.82	AVG

Underwriters Laboratories Taiwan Co., Ltd.


Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone : +886-2-7737-3000

Facsimile (FAX) : +886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

Mode	LE1M_TX2480	Channel	39
------	-------------	---------	----

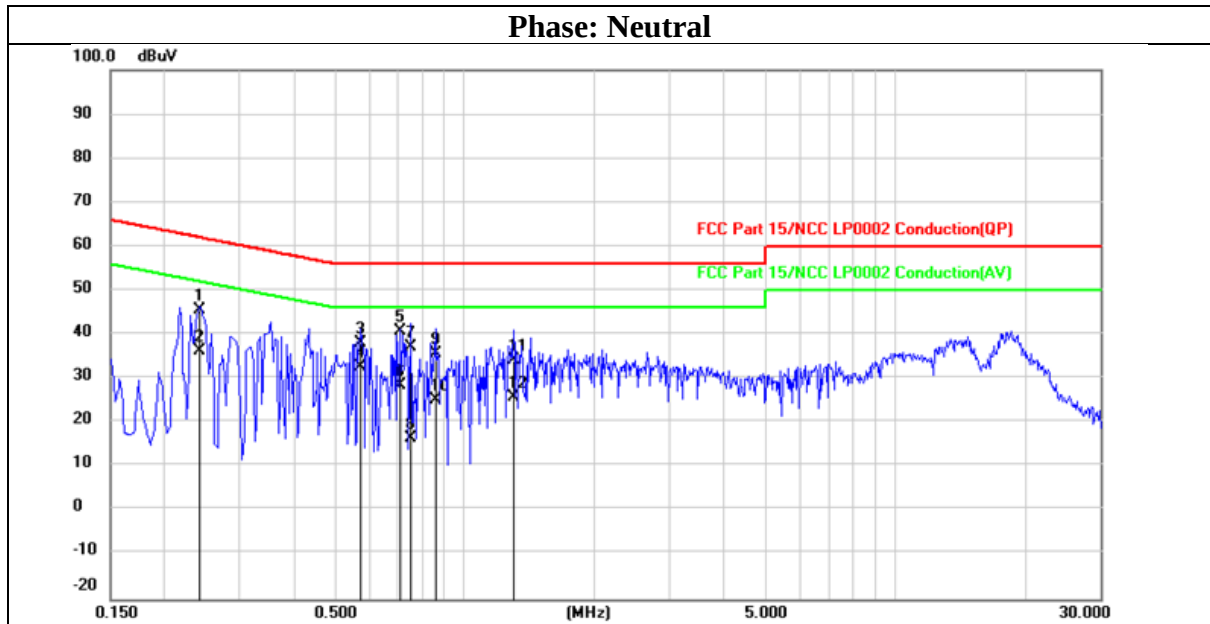

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.2420	35.62	9.94	45.56	62.03	-16.47	QP
2	0.2420	26.43	9.94	36.37	52.03	-15.66	AVG
3	0.5740	28.10	9.95	38.05	56.00	-17.95	QP
4	0.5740	22.85	9.95	32.80	46.00	-13.20	AVG
5	0.7100	30.89	9.96	40.85	56.00	-15.15	QP
6	0.7100	18.63	9.96	28.59	46.00	-17.41	AVG
7	0.7500	27.08	9.96	37.04	56.00	-18.96	QP
8	0.7500	6.38	9.96	16.34	46.00	-29.66	AVG
9	0.8540	25.66	9.96	35.62	56.00	-20.38	QP
10	0.8540	15.18	9.96	25.14	46.00	-20.86	AVG
11	1.3020	24.19	9.98	34.17	56.00	-21.83	QP
12	1.3020	15.87	9.98	25.85	46.00	-20.15	AVG

END OF REPORT

Underwriters Laboratories Taiwan Co., Ltd.

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone : +886-2-7737-3000

Facsimile (FAX) : +886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1