

Plots of System Verification

Annex A. Plots of System Verification

The plots for system verification are shown as follows.

Plots of System Verification

Test Laboratory: Bureau Veritas ADT SAR/HAC Testing Lab

Date: 2022/03/29

S01 System Check_H1900_220329

DUT: Dipole 1900 MHz; Type: D1900V2; SN: 5d036

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: H16T20N1_0329 Medium parameters used: $f = 1900$ MHz; $\sigma = 1.457$ S/m; $\epsilon_r = 38.276$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 23.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3820; ConvF(7.35, 7.35, 7.35) @ 1900 MHz; Calibrated: 2021/07/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1431; Calibrated: 2022/02/23
- Phantom: ELI Phantom_1206; Type: QDOVA001BB;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=50mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 3.36 W/kg


Pin=50mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 49.61 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 4.13 W/kg

SAR(1 g) = 2.11 W/kg; SAR(10 g) = 1.08 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 3.43 W/kg

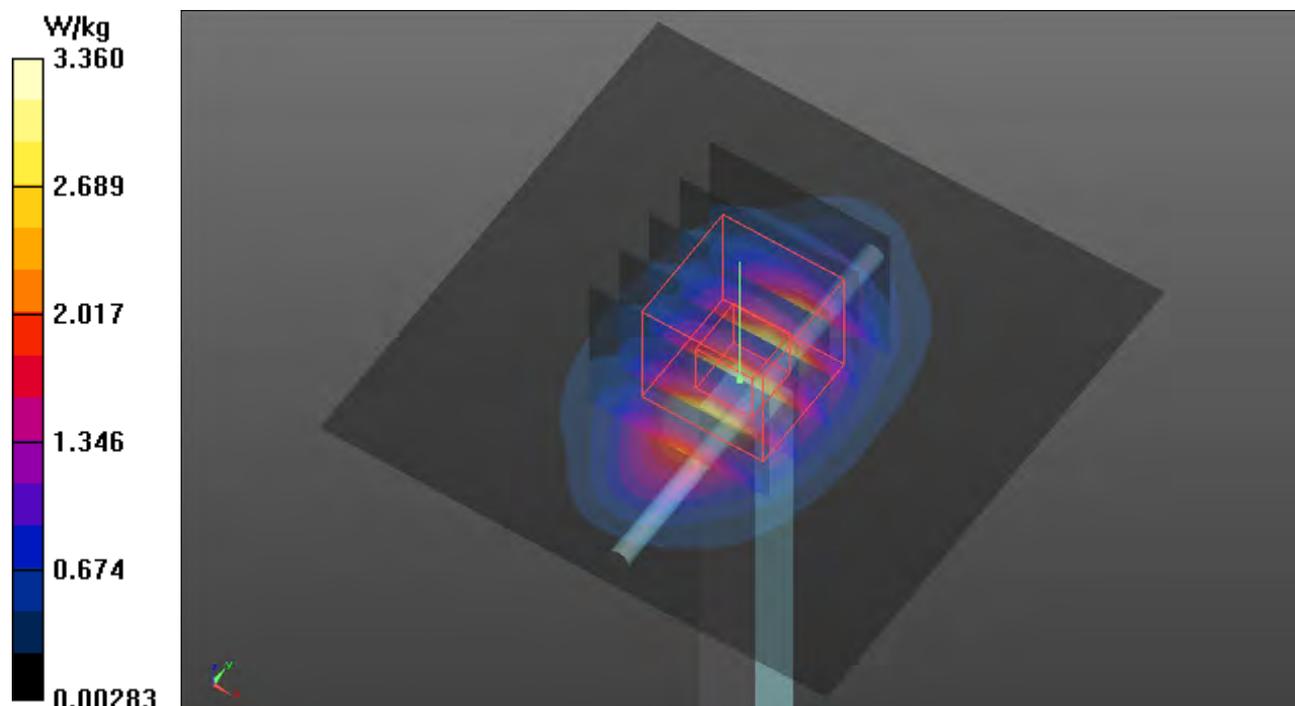

Plots of System Verification

Test Laboratory: Bureau Veritas ADT SAR/HAC Testing Lab

Date: 2022/03/23

S02 System Check_H1750_220323

DUT: Dipole 1750 MHz; Type: D1750V2; SN: 1055

Communication System: UID 0, CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium: H16T20N1_0323 Medium parameters used: $f = 1750$ MHz; $\sigma = 1.275$ S/m; $\epsilon_r = 43.531$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 23.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3820; ConvF(7.66, 7.66, 7.66) @ 1750 MHz; Calibrated: 2021/07/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1431; Calibrated: 2022/02/23
- Phantom: ELI Phantom_1206; Type: QDOVA001BB;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=50mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 2.87 W/kg


Pin=50mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 48.18 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 3.34 W/kg

SAR(1 g) = 1.96 W/kg; SAR(10 g) = 1.01 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 2.78 W/kg

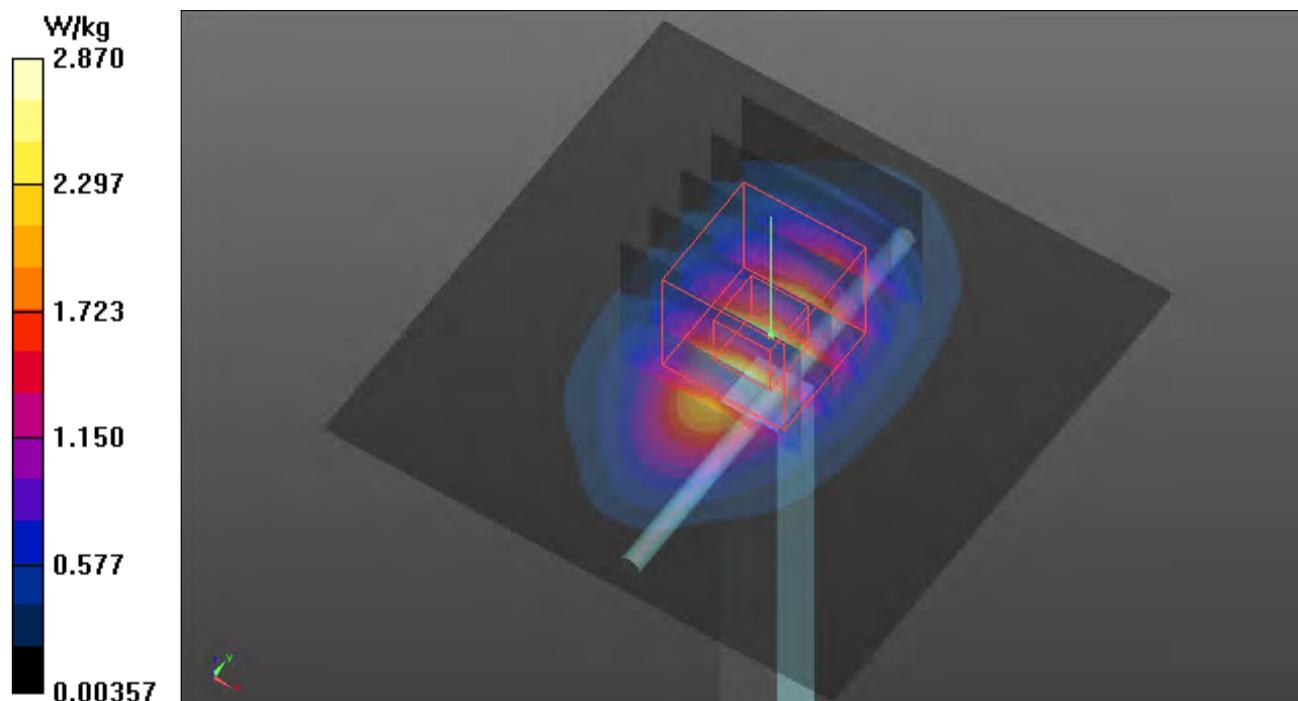

Plots of System Verification

Test Laboratory: Bureau Veritas ADT SAR/HAC Testing Lab

Date: 2022/03/23

S03 System Check_H835_220323

DUT: Dipole 835 MHz; Type: D835V2; SN: 4d121

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: H07T10N1_0323 Medium parameters used: $f = 835$ MHz; $\sigma = 0.916$ S/m; $\epsilon_r = 40.623$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 23.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3820; ConvF(9.09, 9.09, 9.09) @ 835 MHz; Calibrated: 2021/07/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1431; Calibrated: 2022/02/23
- Phantom: ELI Phantom_1206; Type: QDOVA001BB;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=50mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.669 W/kg


Pin=50mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 28.07 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.760 W/kg

SAR(1 g) = 0.485 W/kg; SAR(10 g) = 0.316 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.666 W/kg

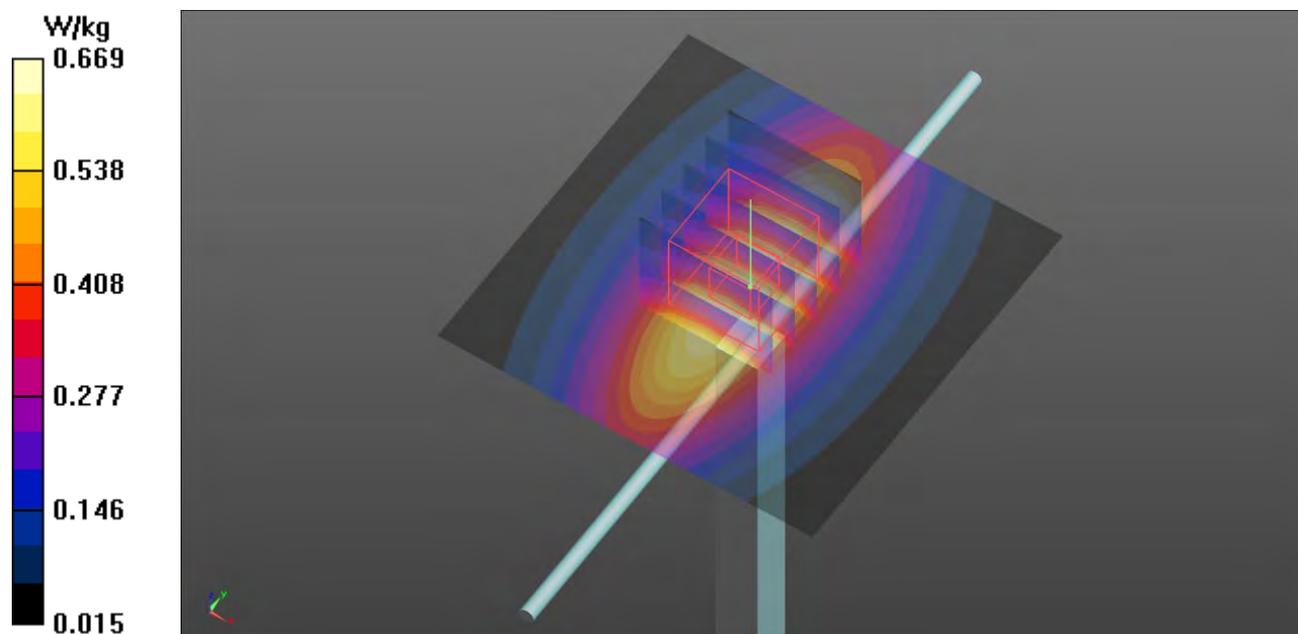

Plots of System Verification

Test Laboratory: Bureau Veritas ADT SAR/HAC Testing Lab

Date: 2022/03/29

S04 System Check_H1900_220329

DUT: Dipole 1900 MHz; Type: D1900V2; SN: 5d036

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: H16T20N1_0329 Medium parameters used: $f = 1900$ MHz; $\sigma = 1.457$ S/m; $\epsilon_r = 38.276$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 23.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3820; ConvF(7.35, 7.35, 7.35) @ 1900 MHz; Calibrated: 2021/07/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1431; Calibrated: 2022/02/23
- Phantom: ELI Phantom_1206; Type: QDOVA001BB;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=50mW/Area Scan (61x61x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 3.36 W/kg


Pin=50mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 49.61 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 4.13 W/kg

SAR(1 g) = 2.11 W/kg; SAR(10 g) = 1.08 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 3.43 W/kg

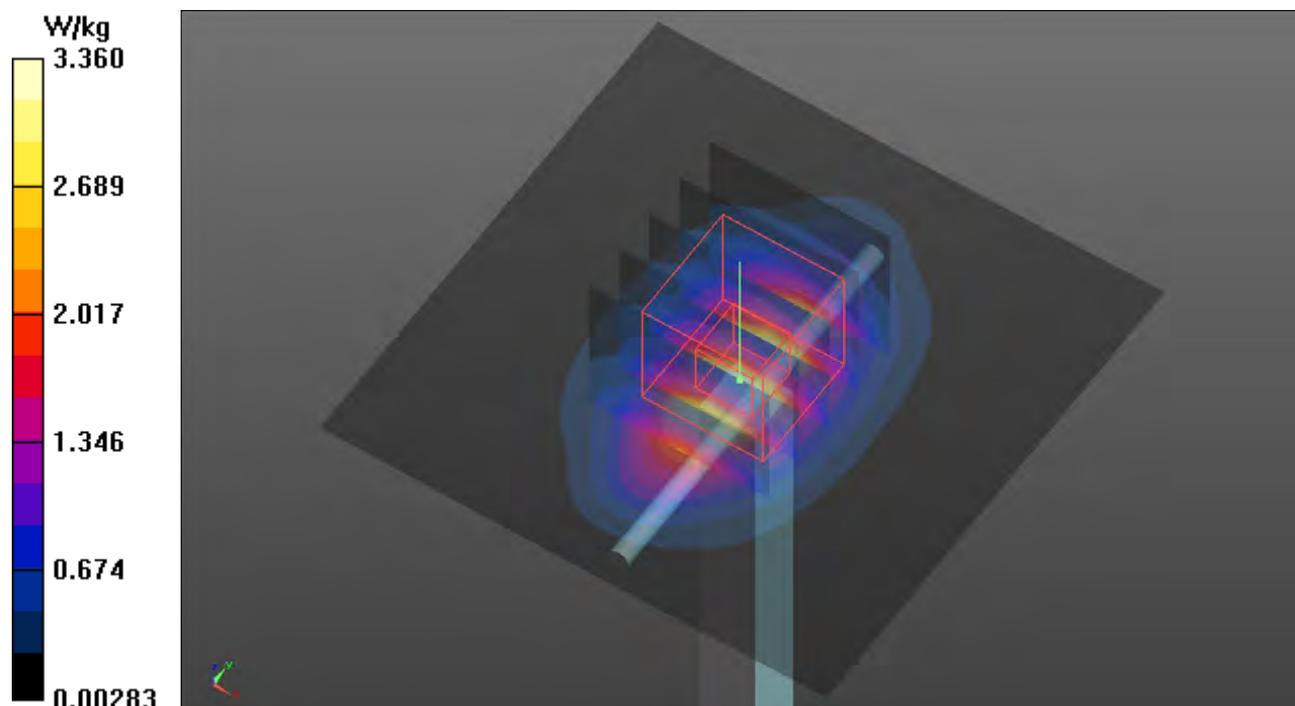

Plots of System Verification

Test Laboratory: Bureau Veritas ADT SAR/HAC Testing Lab

Date: 2022/03/30

S05 System Check_H1750_220330

DUT: Dipole 1750 MHz; Type: D1750V2; SN: 1055

Communication System: UID 0, CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium: H16T20N1_0330 Medium parameters used: $f = 1750$ MHz; $\sigma = 1.373$ S/m; $\epsilon_r = 39.042$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 23.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3820; ConvF(7.66, 7.66, 7.66) @ 1750 MHz; Calibrated: 2021/07/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1431; Calibrated: 2022/02/23
- Phantom: ELI Phantom_1206; Type: QDOVA001BB;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=50mW/Area Scan (61x61x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 3.09 W/kg


Pin=50mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 48.18 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 3.60 W/kg

SAR(1 g) = 1.95 W/kg; SAR(10 g) = 1.07 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 3.00 W/kg

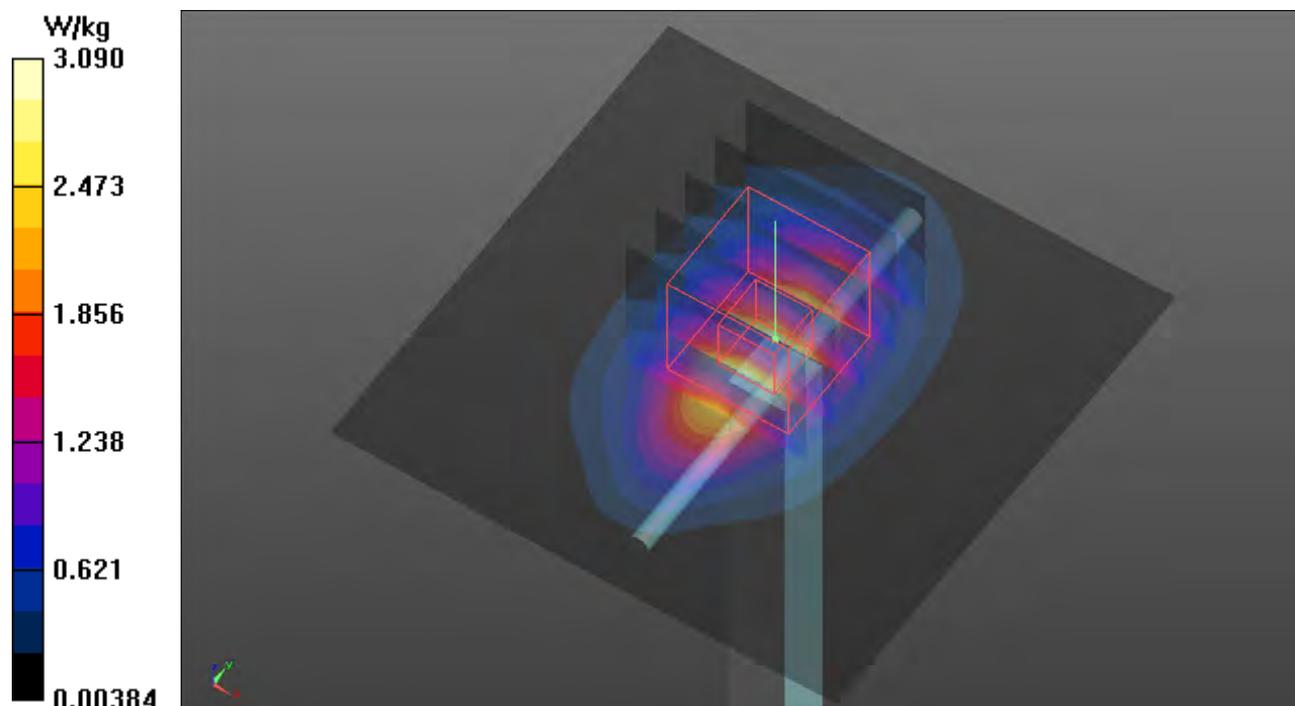

Plots of System Verification

Test Laboratory: Bureau Veritas ADT SAR/HAC Testing Lab

Date: 2022/03/30

S06 System Check_H835_220330

DUT: Dipole 835 MHz; Type: D835V2; SN: 4d121

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: H07T10N1_0330 Medium parameters used: $f = 835$ MHz; $\sigma = 0.872$ S/m; $\epsilon_r = 45.053$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 23.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3820; ConvF(9.09, 9.09, 9.09) @ 835 MHz; Calibrated: 2021/07/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1431; Calibrated: 2022/02/23
- Phantom: ELI Phantom_1206; Type: QDOVA001BB;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=50mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.637 W/kg


Pin=50mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 28.07 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.724 W/kg

SAR(1 g) = 0.494 W/kg; SAR(10 g) = 0.315 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.634 W/kg

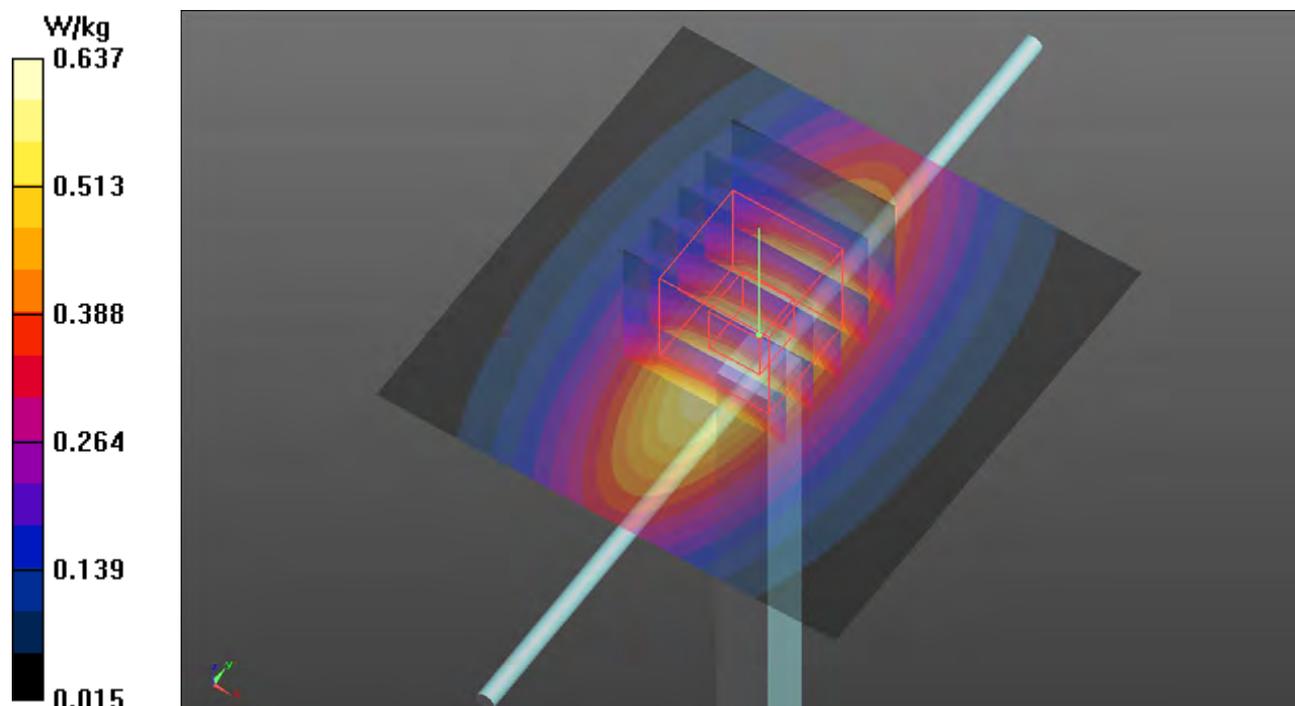

Plots of System Verification

Test Laboratory: Bureau Veritas ADT SAR/HAC Testing Lab

Date: 2022/03/29

S07 System Check_H2600_220329

DUT: Dipole 2600 MHz; Type: D2600V2; SN: 1020

Communication System: UID 0, CW; Frequency: 2600 MHz; Duty Cycle: 1:1

Medium: H19T27N1_0329 Medium parameters used: $f = 2600$ MHz; $\sigma = 1.901$ S/m; $\epsilon_r = 38.467$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 23.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3820; ConvF(6.7, 6.7, 6.7) @ 2600 MHz; Calibrated: 2021/07/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1431; Calibrated: 2022/02/23
- Phantom: ELI Phantom_1206; Type: QDOVA001BB;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=50mW/Area Scan (81x81x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 4.79 W/kg


Pin=50mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 52.63 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 5.92 W/kg

SAR(1 g) = 2.83 W/kg; SAR(10 g) = 1.24 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 4.78 W/kg

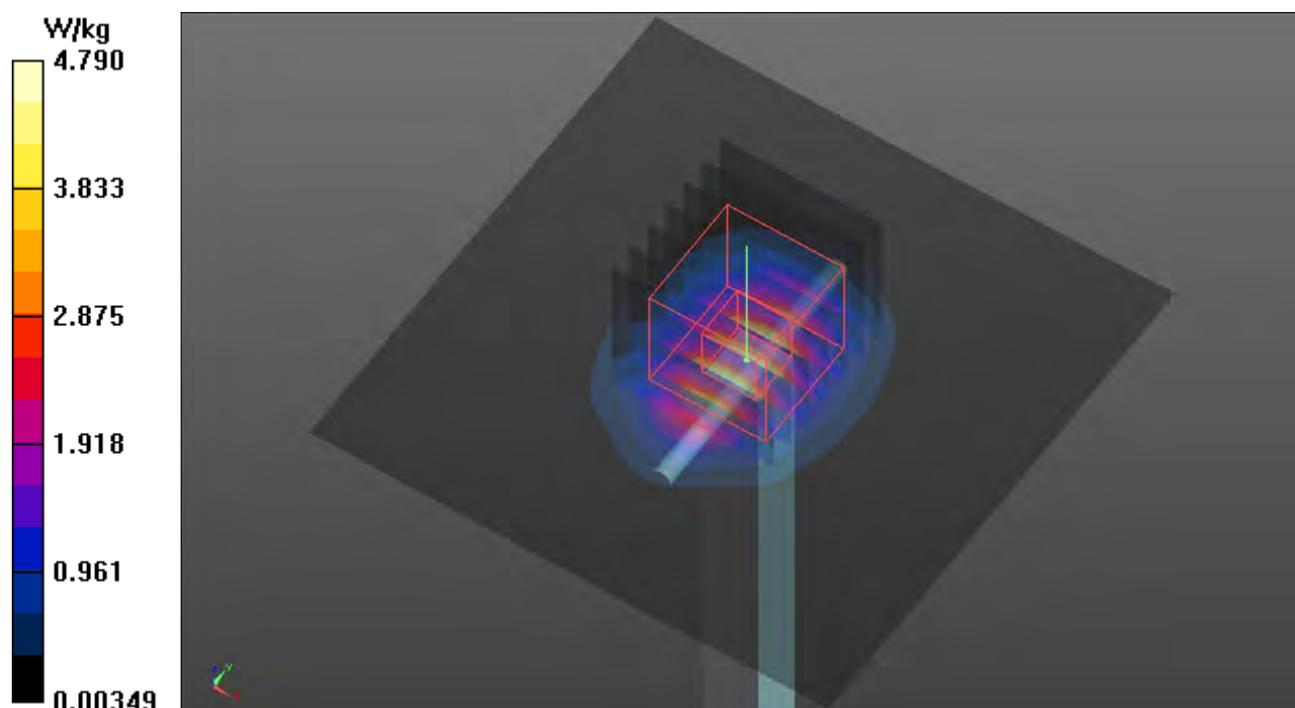

Plots of System Verification

Test Laboratory: Bureau Veritas ADT SAR/HAC Testing Lab

Date: 2022/03/28

S08 System Check_H750_220328

DUT: Dipole 750 MHz; Type: D750V3; SN: 1013

Communication System: UID 0, CW; Frequency: 750 MHz; Duty Cycle: 1:1

Medium: H06T09N1_0328 Medium parameters used: $f = 750$ MHz; $\sigma = 0.921$ S/m; $\epsilon_r = 42.312$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.7 °C ; Liquid Temperature : 23.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7554; ConvF(10.38, 10.38, 10.38) @ 750 MHz; Calibrated: 2021/08/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1589; Calibrated: 2021/08/20
- Phantom: ELI Phantom_2105; Type: QD OVA 004 Ax;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.645 W/kg


Pin=50mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 27.48 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.716 W/kg

SAR(1 g) = 0.453 W/kg; SAR(10 g) = 0.299 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.627 W/kg

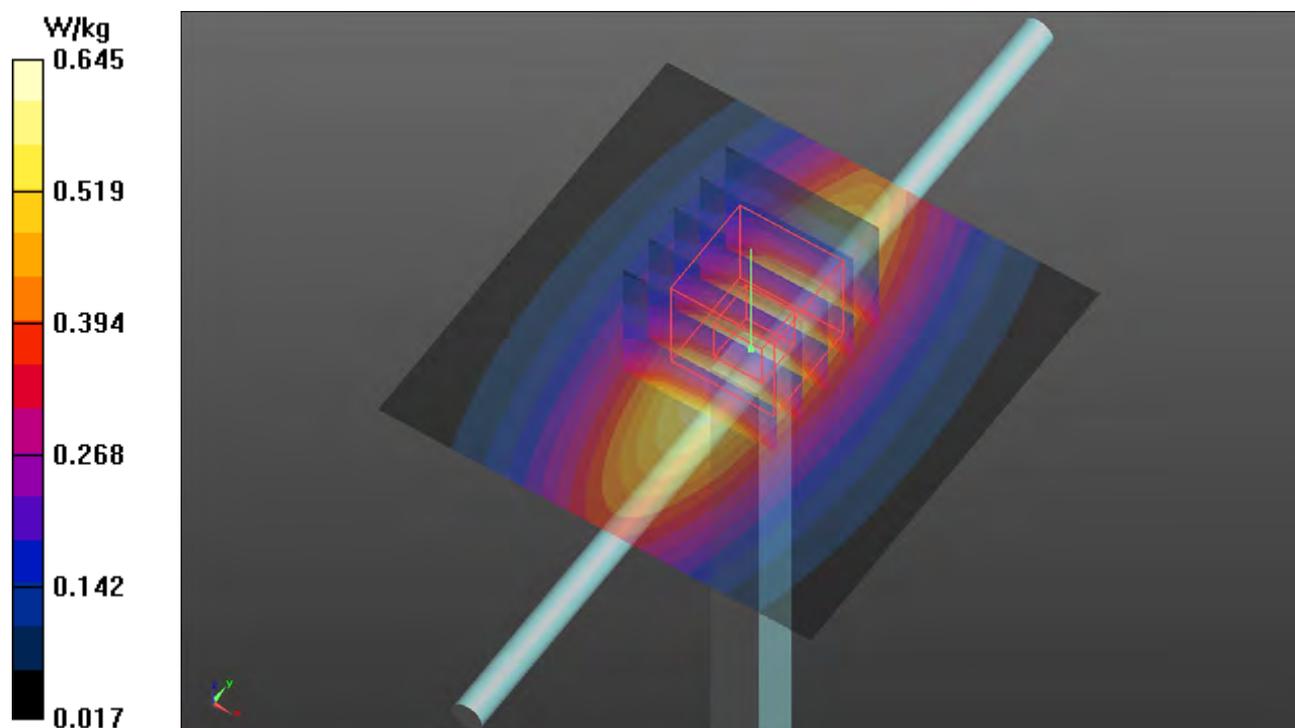

Plots of System Verification

Test Laboratory: Bureau Veritas ADT SAR/HAC Testing Lab

Date: 2022/03/23

S09 System Check_H750_220323

DUT: Dipole 750 MHz; Type: D750V3; SN: 1013

Communication System: UID 0, CW; Frequency: 750 MHz; Duty Cycle: 1:1

Medium: H06T09N1_0323 Medium parameters used: $f = 750$ MHz; $\sigma = 0.9$ S/m; $\epsilon_r = 42.167$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 23.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3820; ConvF(9.62, 9.62, 9.62) @ 750 MHz; Calibrated: 2021/07/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1431; Calibrated: 2022/02/23
- Phantom: ELI Phantom_1206; Type: QDOVA001BB;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=50mW/Area Scan (61x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.551 W/kg


Pin=50mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 25.69 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.632 W/kg

SAR(1 g) = 0.405 W/kg; SAR(10 g) = 0.267 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.554 W/kg

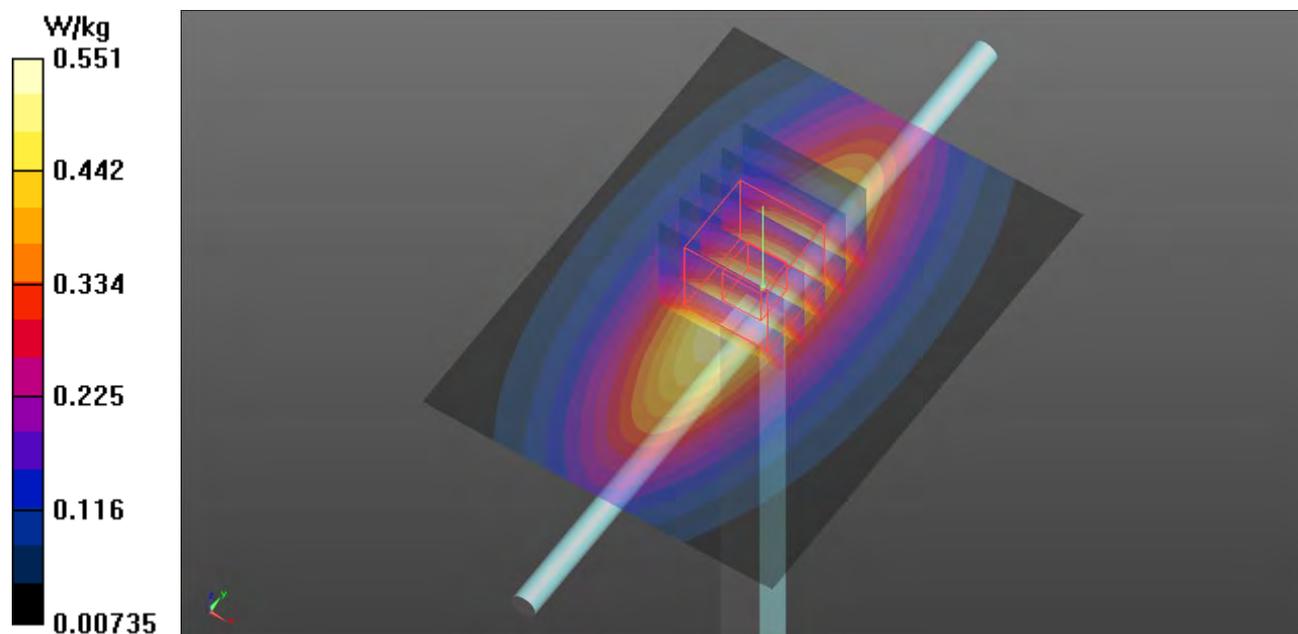

Plots of System Verification

Test Laboratory: Bureau Veritas ADT SAR/HAC Testing Lab

Date: 2022/03/23

S10 System Check_H750_220323

DUT: Dipole 750 MHz; Type: D750V3; SN: 1013

Communication System: UID 0, CW; Frequency: 750 MHz; Duty Cycle: 1:1

Medium: H06T09N1_0323 Medium parameters used: $f = 750$ MHz; $\sigma = 0.9$ S/m; $\epsilon_r = 42.167$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 23.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3820; ConvF(9.62, 9.62, 9.62) @ 750 MHz; Calibrated: 2021/07/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1431; Calibrated: 2022/02/23
- Phantom: ELI Phantom_1206; Type: QDOVA001BB;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=50mW/Area Scan (61x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.551 W/kg


Pin=50mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 25.69 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.632 W/kg

SAR(1 g) = 0.405 W/kg; SAR(10 g) = 0.267 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.554 W/kg

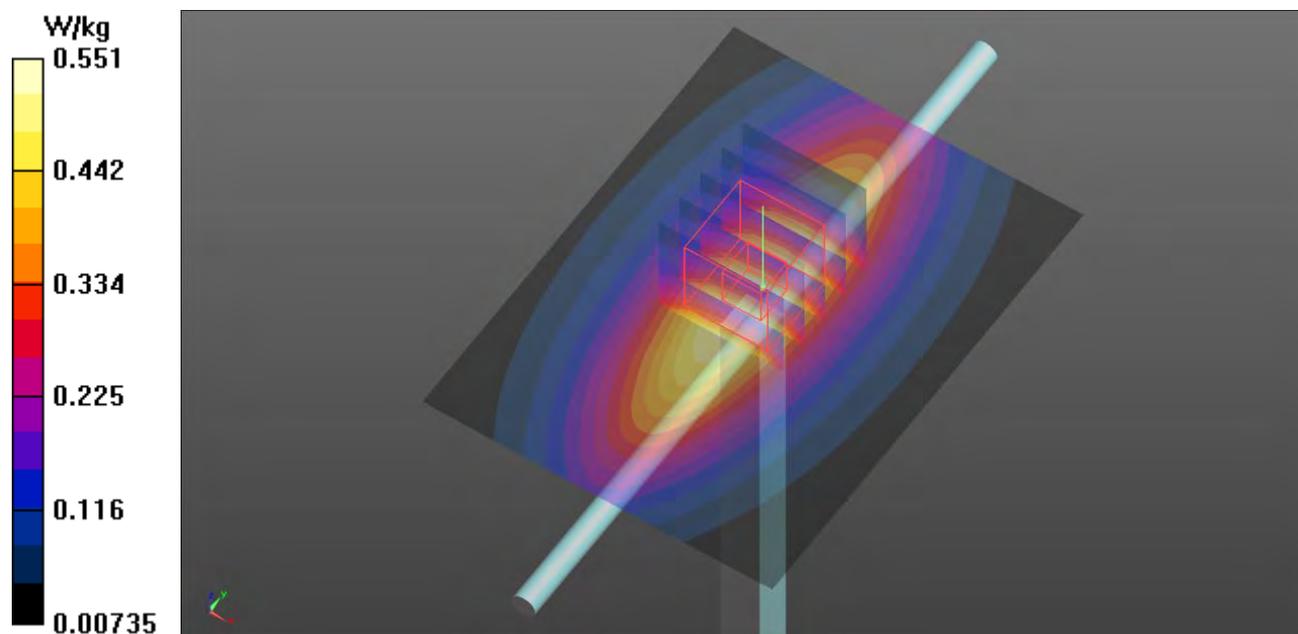

Plots of System Verification

Test Laboratory: Bureau Veritas ADT SAR/HAC Testing Lab

Date: 2022/03/31

S11 System Check_H750_220331

DUT: Dipole 750 MHz; Type: D750V3; SN: 1013

Communication System: UID 0, CW; Frequency: 750 MHz; Duty Cycle: 1:1

Medium: H06T09N1_0331 Medium parameters used: $f = 750$ MHz; $\sigma = 0.894$ S/m; $\epsilon_r = 40.645$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C ; Liquid Temperature : 23.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3820; ConvF(9.62, 9.62, 9.62) @ 750 MHz; Calibrated: 2021/07/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1431; Calibrated: 2022/02/23
- Phantom: ELI Phantom_1206; Type: QDOVA001BB;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=50mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.777 W/kg


Pin=50mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 30.61 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.892 W/kg

SAR(1 g) = 0.464 W/kg; SAR(10 g) = 0.274 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.780 W/kg

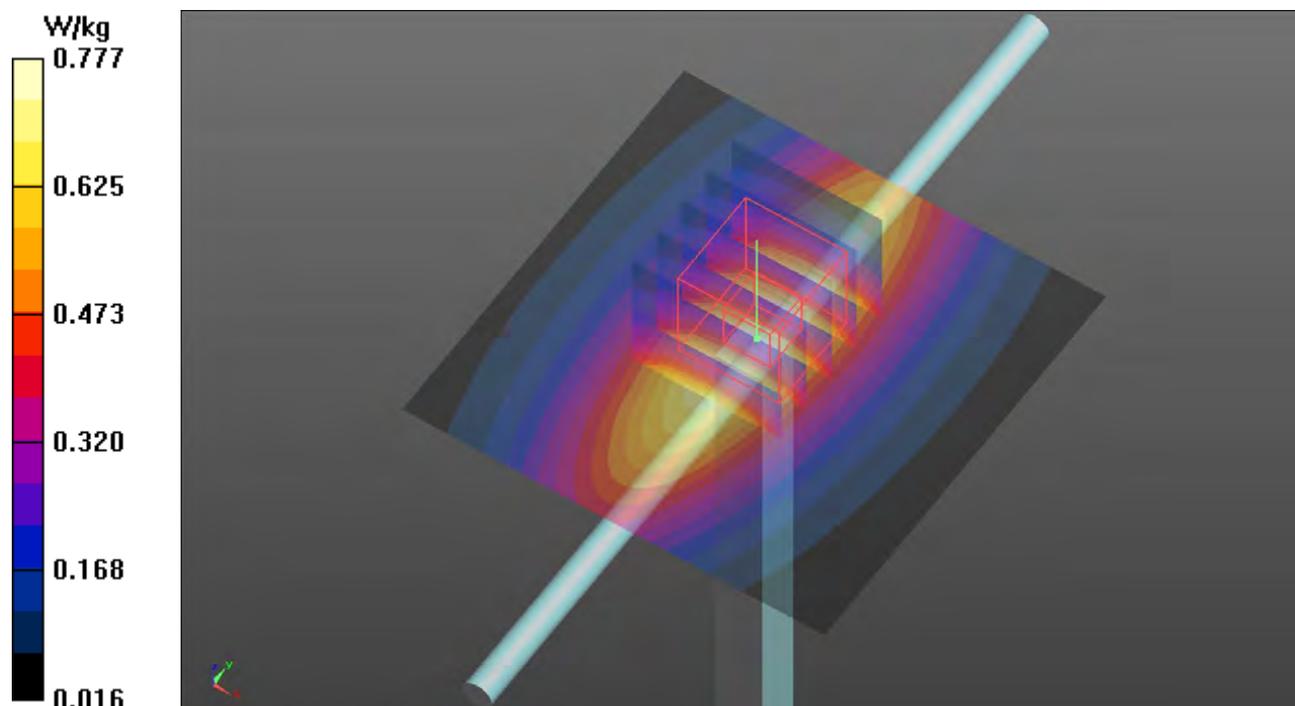

Plots of System Verification

Test Laboratory: Bureau Veritas ADT SAR/HAC Testing Lab

Date: 2022/04/01

S12 System Check_H1900_220401

DUT: Dipole 1900 MHz; Type: D1900V2; SN: 5d036

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: H16T20N1_0401 Medium parameters used: $f = 1900$ MHz; $\sigma = 1.463$ S/m; $\epsilon_r = 38.847$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 23.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3820; ConvF(7.35, 7.35, 7.35) @ 1900 MHz; Calibrated: 2021/07/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1431; Calibrated: 2022/02/23
- Phantom: ELI Phantom_1206; Type: QDOVA001BB;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=50mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 4.51 W/kg


Pin=50mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 57.19 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 5.34 W/kg

SAR(1 g) = 2.09 W/kg; SAR(10 g) = 0.988 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 4.51 W/kg

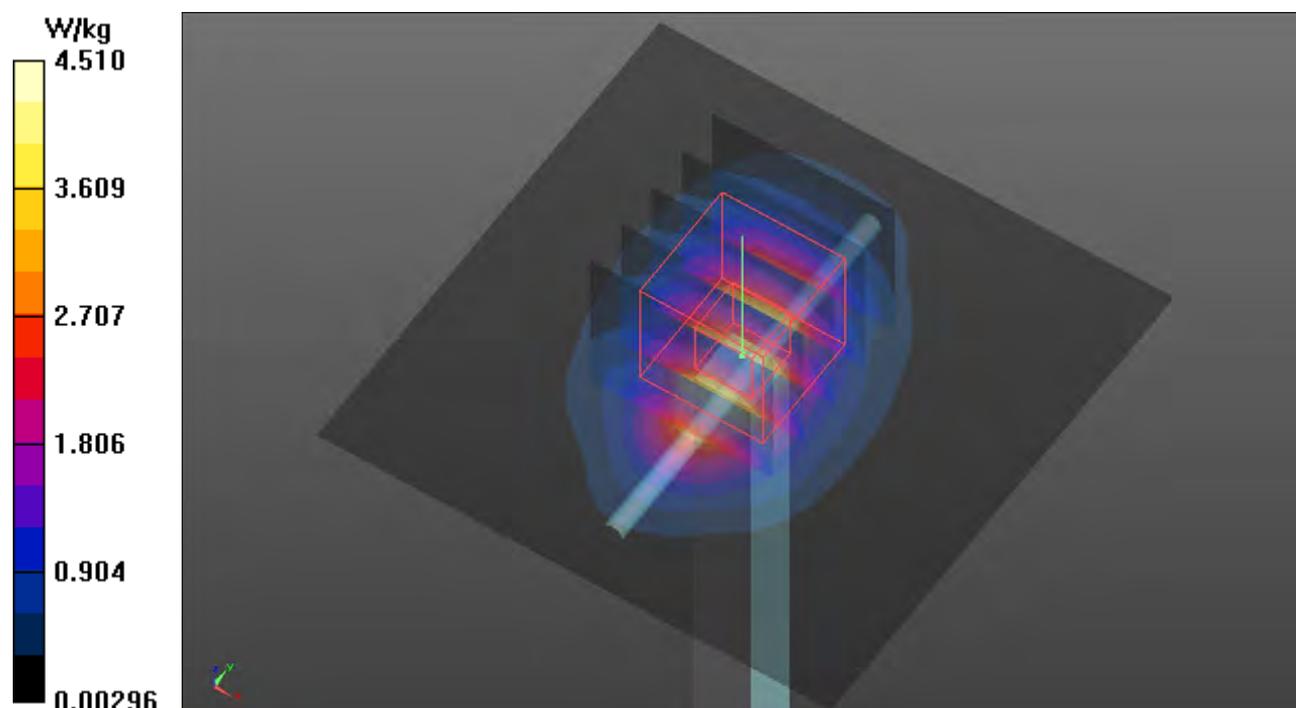

Plots of System Verification

Test Laboratory: Bureau Veritas ADT SAR/HAC Testing Lab

Date: 2022/04/01

S13 System Check_H835_220401

DUT: Dipole 835 MHz; Type: D835V2; SN: 4d121

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: H07T10N1_0401 Medium parameters used: $f = 835$ MHz; $\sigma = 0.929$ S/m; $\epsilon_r = 40.545$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 23.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3820; ConvF(9.09, 9.09, 9.09) @ 835 MHz; Calibrated: 2021/07/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1431; Calibrated: 2022/02/23
- Phantom: ELI Phantom_1206; Type: QDOVA001BB;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=50mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.890 W/kg


Pin=50mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 32.07 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 1.02 W/kg

SAR(1 g) = 0.458 W/kg; SAR(10 g) = 0.291 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.900 W/kg

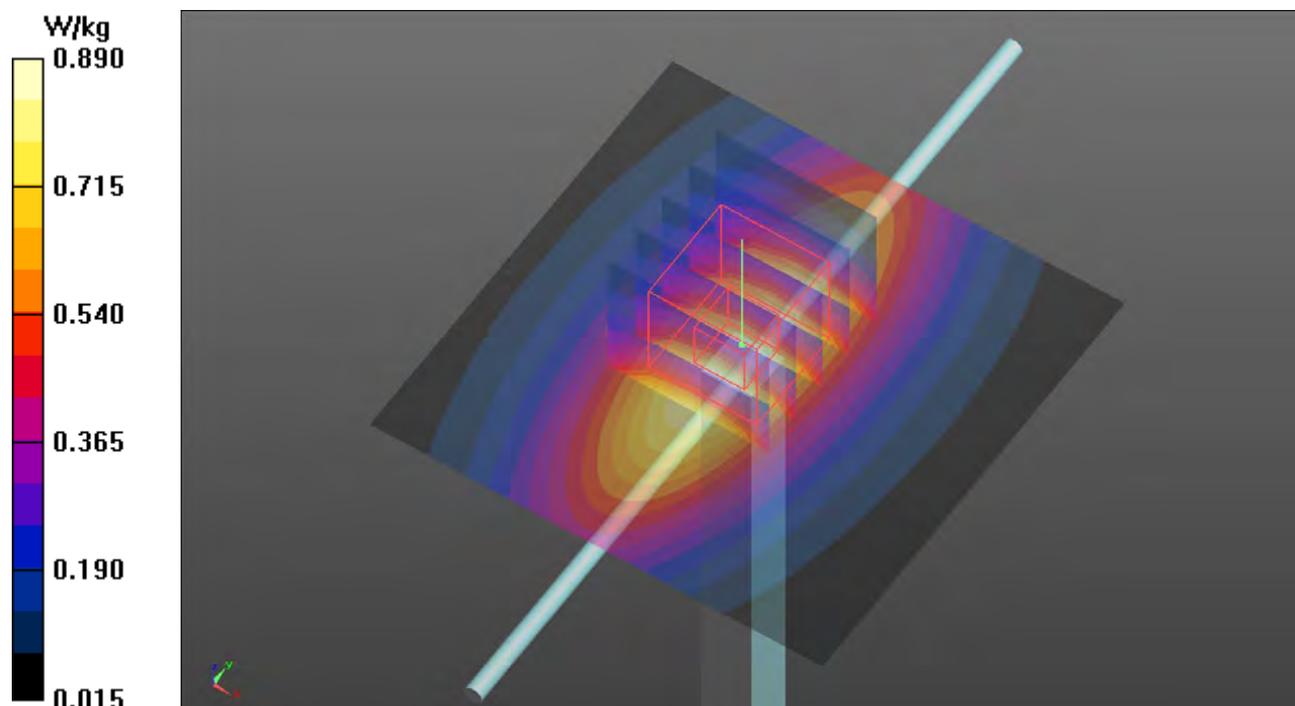

Plots of System Verification

Test Laboratory: Bureau Veritas ADT SAR/HAC Testing Lab

Date: 2022/03/29

S14 System Check_H2300_220329

DUT: Dipole 2300 MHz; Type: D2300V2; SN:1004

Communication System: UID 0, CW; Frequency: 2300 MHz; Duty Cycle: 1:1

Medium: H19T27N1_0329 Medium parameters used: $f = 2300$ MHz; $\sigma = 1.716$ S/m; $\epsilon_r = 38.469$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.7 °C ; Liquid Temperature : 23.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7554; ConvF(7.68, 7.68, 7.68) @ 2300 MHz; Calibrated: 2021/08/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1589; Calibrated: 2021/08/20
- Phantom: ELI Phantom_2105; Type: QD OVA 004 Ax;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (81x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 4.24 W/kg


Pin=50mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 50.45 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 5.17 W/kg

SAR(1 g) = 2.46 W/kg; SAR(10 g) = 1.18 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 4.16 W/kg

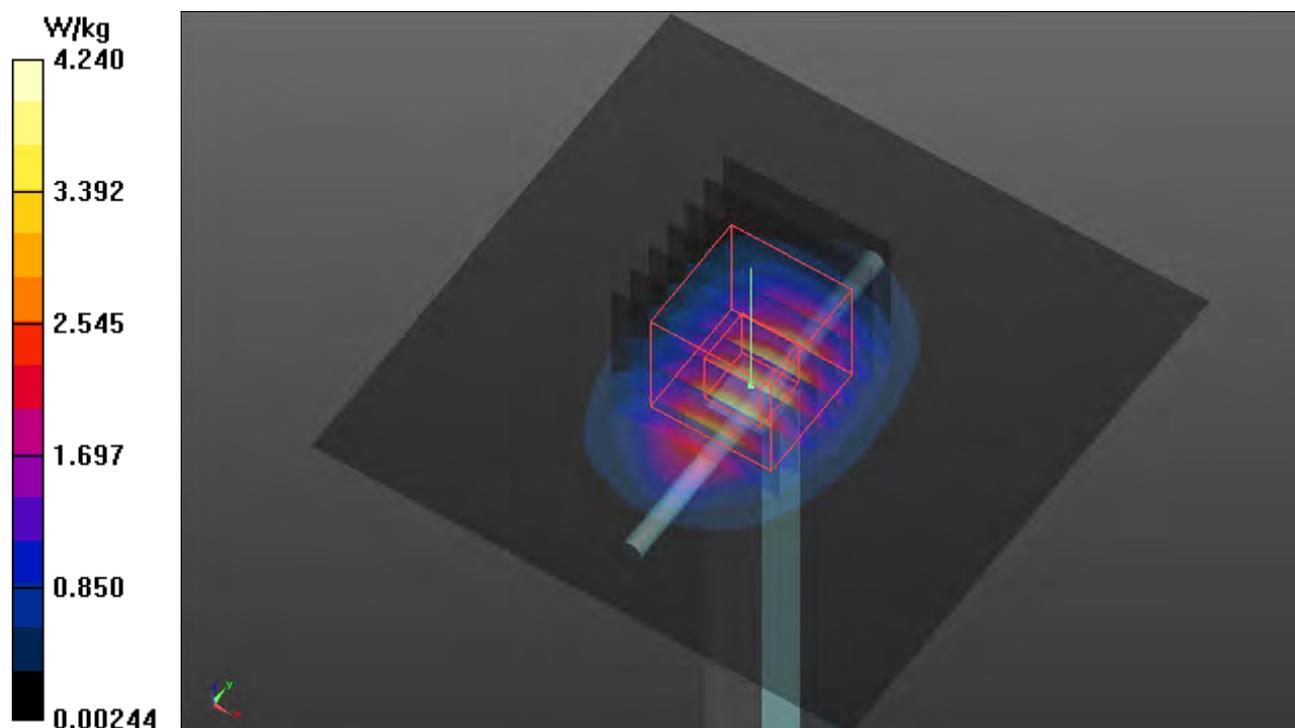

Plots of System Verification

Test Laboratory: Bureau Veritas ADT SAR/HAC Testing Lab

Date: 2022/04/01

S15 System Check_H2600_220401

DUT: Dipole 2600 MHz; Type: D2600V2; SN: 1020

Communication System: UID 0, CW; Frequency: 2600 MHz; Duty Cycle: 1:1

Medium: H19T27N1_0401 Medium parameters used: $f = 2600$ MHz; $\sigma = 1.9$ S/m; $\epsilon_r = 38.472$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 23.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3820; ConvF(6.7, 6.7, 6.7) @ 2600 MHz; Calibrated: 2021/07/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1431; Calibrated: 2022/02/23
- Phantom: ELI Phantom_1206; Type: QDOVA001BB;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=50mW/Area Scan (81x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 6.61 W/kg


Pin=50mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 60.19 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 8.23 W/kg

SAR(1 g) = 2.68 W/kg; SAR(10 g) = 1.31 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 6.67 W/kg

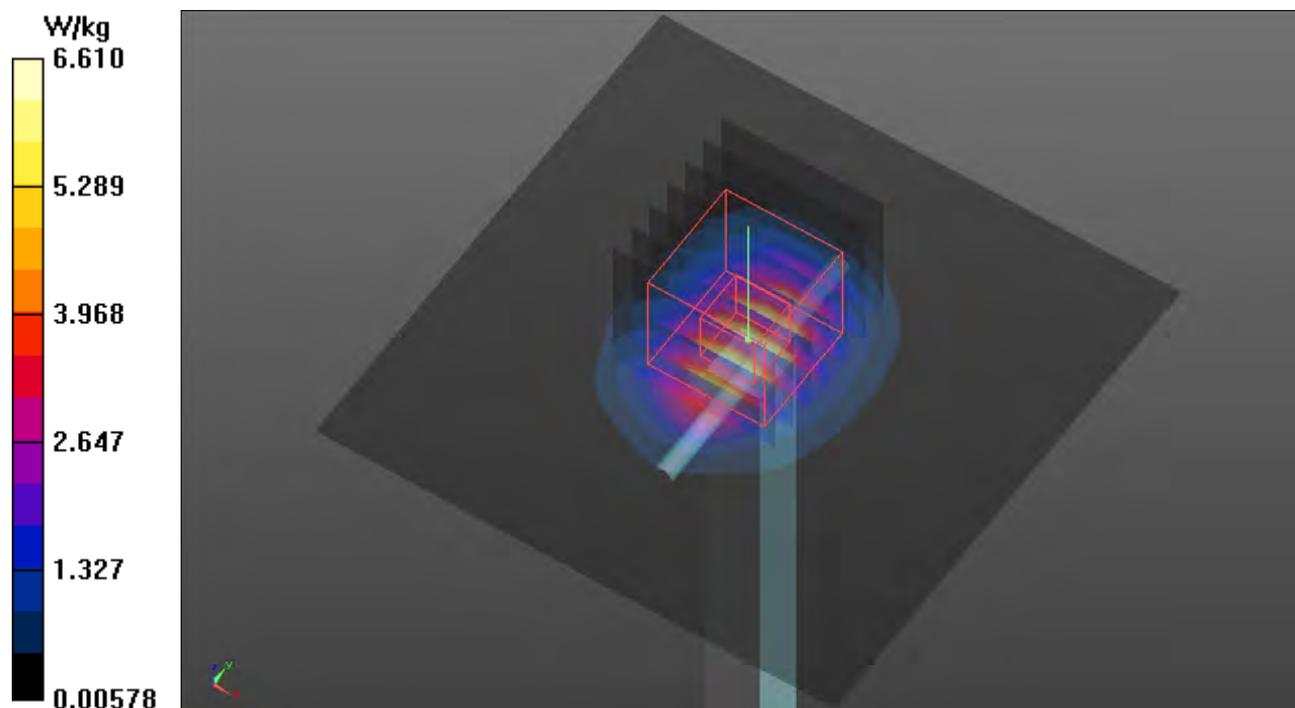

Plots of System Verification

Test Laboratory: Bureau Veritas ADT SAR/HAC Testing Lab

Date: 2022/03/29

S16 System Check_H2300_220329

DUT: Dipole 2300 MHz; Type: D2300V2; SN:1004

Communication System: UID 0, CW; Frequency: 2300 MHz; Duty Cycle: 1:1

Medium: H19T27N1_0329 Medium parameters used: $f = 2300$ MHz; $\sigma = 1.716$ S/m; $\epsilon_r = 38.469$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.7 °C ; Liquid Temperature : 23.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7554; ConvF(7.68, 7.68, 7.68) @ 2300 MHz; Calibrated: 2021/08/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1589; Calibrated: 2021/08/20
- Phantom: ELI Phantom_2105; Type: QD OVA 004 Ax;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (81x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 4.24 W/kg


Pin=50mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 50.45 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 5.17 W/kg

SAR(1 g) = 2.46 W/kg; SAR(10 g) = 1.18 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 4.16 W/kg

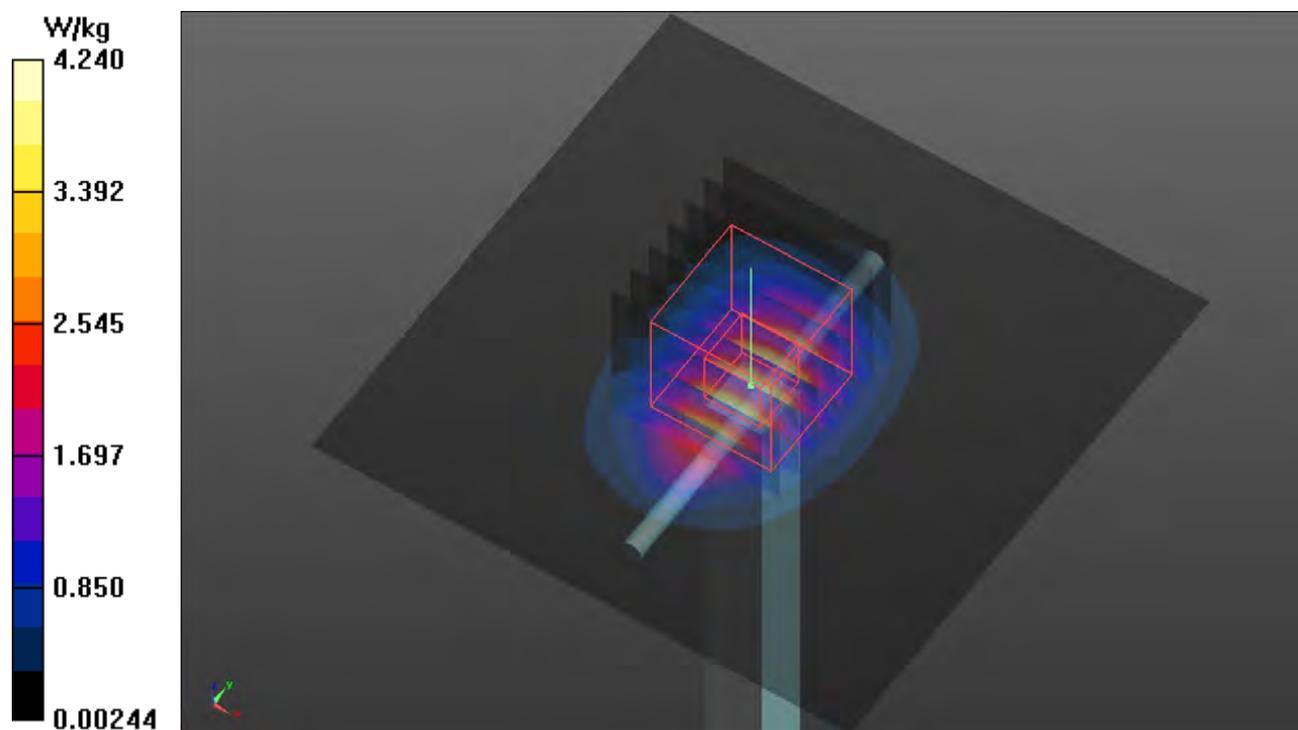

Plots of System Verification

Test Laboratory: Bureau Veritas ADT SAR/HAC Testing Lab

Date: 2022/03/22

S17 System Check_H2600_220322

DUT: Dipole 2600 MHz; Type: D2600V2; SN: 1020

Communication System: UID 0, CW; Frequency: 2600 MHz; Duty Cycle: 1:1

Medium: H19T27N1_0322 Medium parameters used: $f = 2600$ MHz; $\sigma = 2.03$ S/m; $\epsilon_r = 37.454$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 23.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7554; ConvF(7.3, 7.3, 7.3) @ 2600 MHz; Calibrated: 2021/08/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1589; Calibrated: 2021/08/20
- Phantom: ELI Phantom_2105; Type: QD OVA 004 Ax;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (81x81x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 4.89 W/kg


Pin=50mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 50.77 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 6.10 W/kg

SAR(1 g) = 2.73 W/kg; SAR(10 g) = 1.26 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 4.83 W/kg

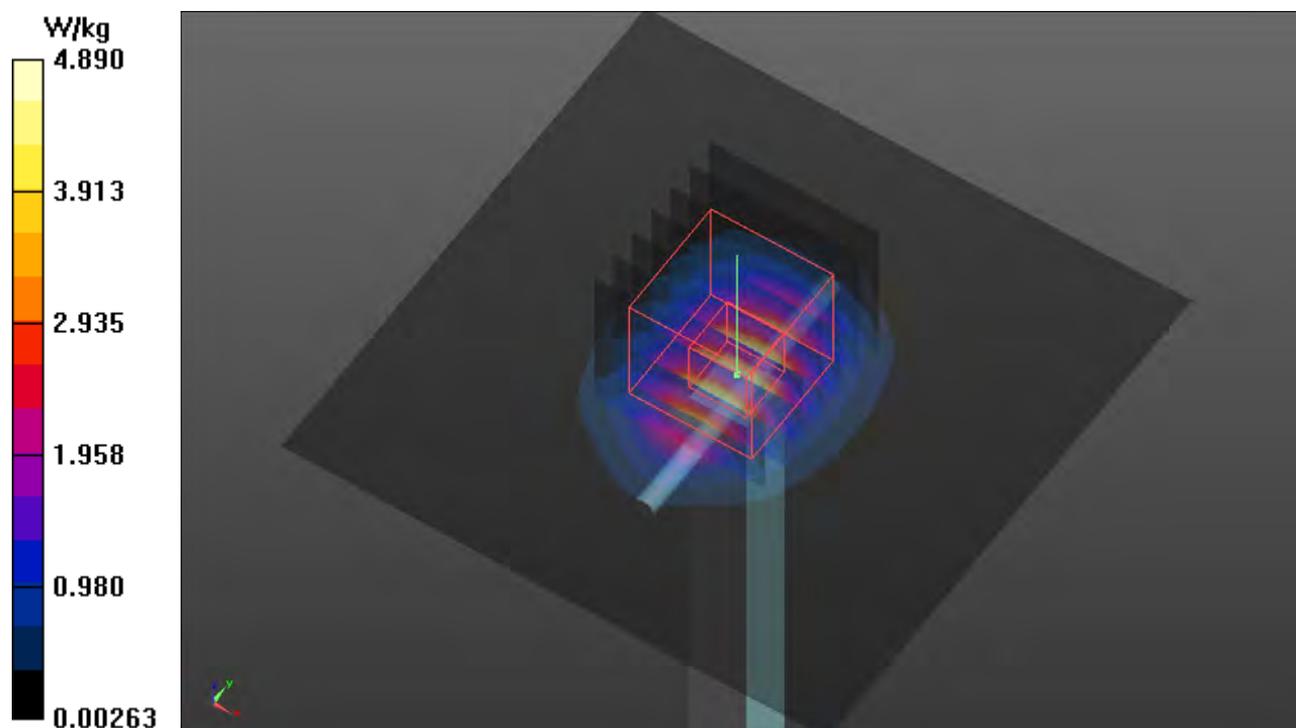

Plots of System Verification

Test Laboratory: Bureau Veritas ADT SAR/HAC Testing Lab

Date: 2022/03/27

S20a System Check_H3500_220327

DUT: Dipole 3500 MHz; Type:D3500V2; SN: 1007

Communication System: UID 0, CW; Frequency: 3500 MHz; Duty Cycle: 1:1

Medium: H33T42N1_0327 Medium parameters used: $f = 3500$ MHz; $\sigma = 2.922$ S/m; $\epsilon_r = 37.452$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 23.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3820; ConvF(6.66, 6.66, 6.66) @ 3500 MHz; Calibrated: 2021/07/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1431; Calibrated: 2022/02/23
- Phantom: ELI Phantom_1206; Type: QDOVA001BB;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=50mW/Area Scan (81x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 6.70 W/kg


Pin=50mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=2.5mm

Reference Value = 49.09 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 8.94 W/kg

SAR(1 g) = 3.45 W/kg; SAR(10 g) = 1.31 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 6.66 W/kg

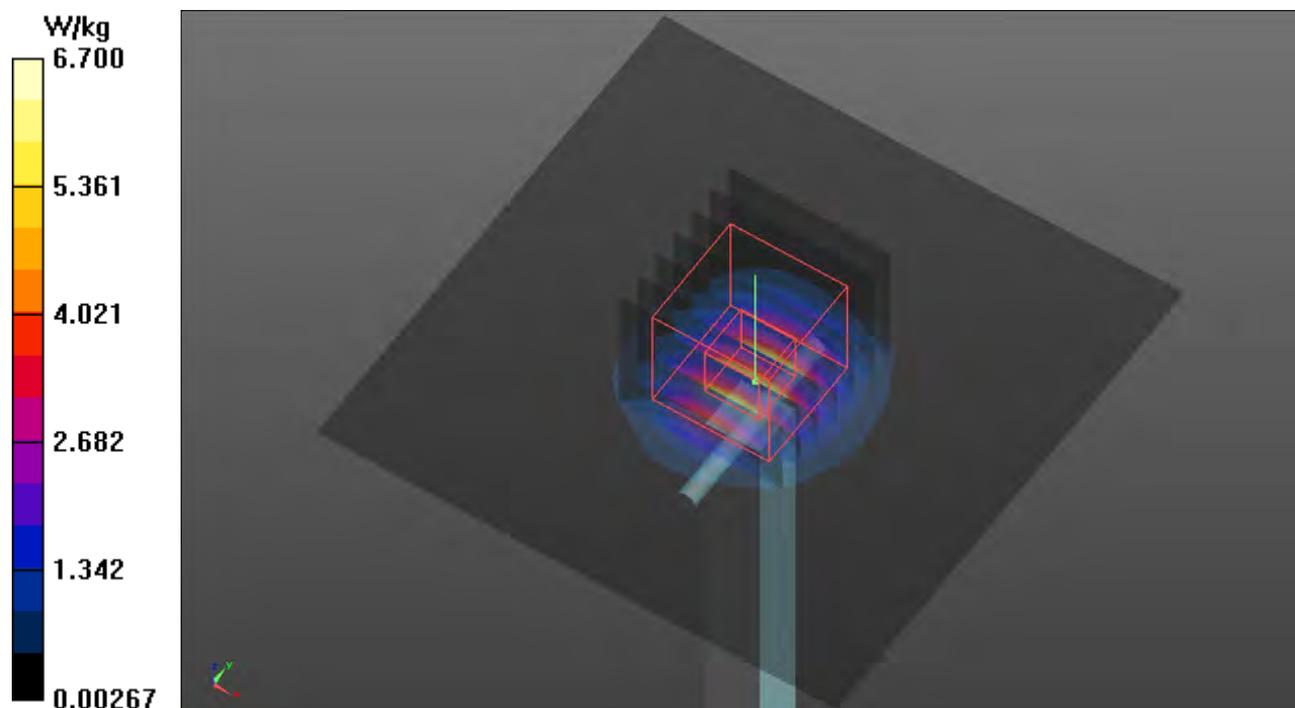

Plots of System Verification

Test Laboratory: Bureau Veritas ADT SAR/HAC Testing Lab

Date: 2022/03/27

S20b System Check_H3700_220327

DUT: Dipole 3700 MHz D3700V2

Communication System: UID 0, CW; Frequency: 3700 MHz; Duty Cycle: 1:1

Medium: H33T42N1_0327 Medium parameters used: $f = 3700$ MHz; $\sigma = 3.133$ S/m; $\epsilon_r = 36.831$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 23.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3820; ConvF(6.51, 6.51, 6.51) @ 3700 MHz; Calibrated: 2021/07/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1431; Calibrated: 2022/02/23
- Phantom: ELI Phantom_1206; Type: QDOVA001BB;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=50mW/Area Scan (81x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 6.98 W/kg


Pin=50mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=2.5mm

Reference Value = 50.13 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 9.43 W/kg

SAR(1 g) = 3.43 W/kg; SAR(10 g) = 1.27 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 6.93 W/kg

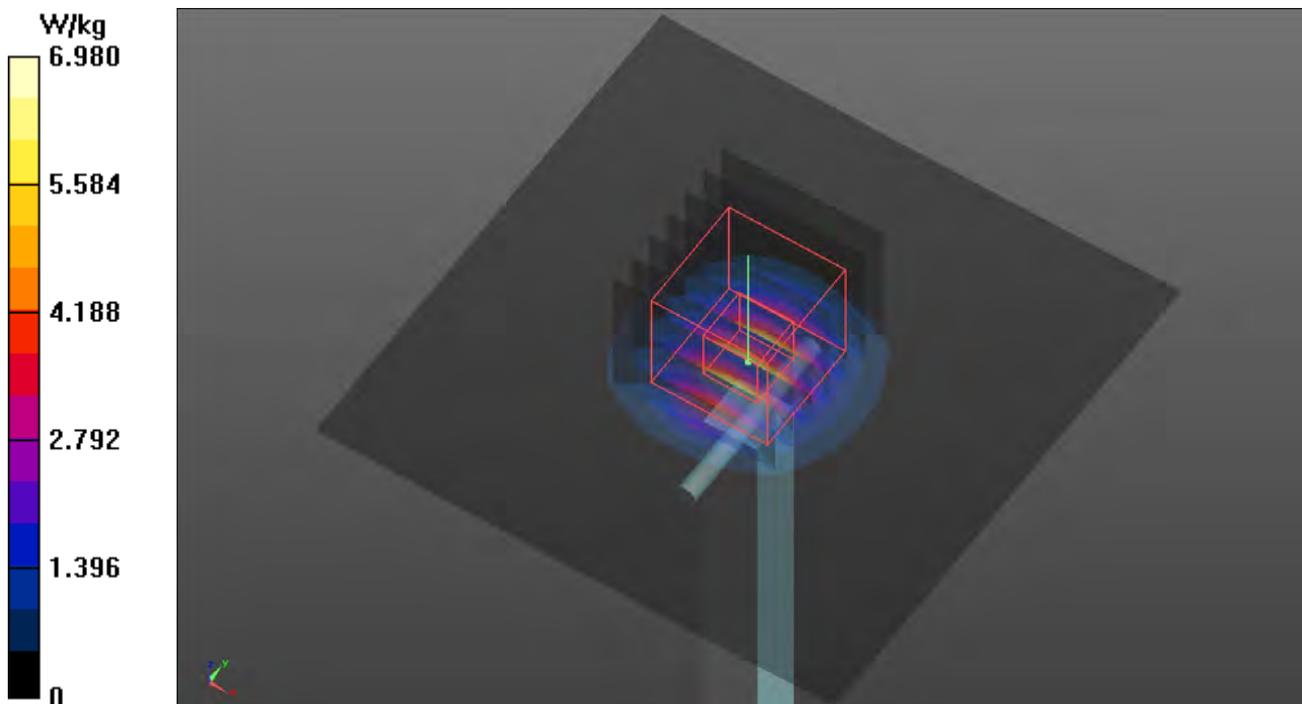

Plots of System Verification

Test Laboratory: Bureau Veritas ADT SAR/HAC Testing Lab

Date: 2022/03/26

S21 System Check_H1750_220326

DUT: Dipole 1750 MHz; Type: D1750V2; SN: 1055

Communication System: UID 0, CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium: H16T20N1_0326 Medium parameters used: $f = 1750$ MHz; $\sigma = 1.368$ S/m; $\epsilon_r = 38.841$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 23.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7554; ConvF(8.54, 8.54, 8.54) @ 1750 MHz; Calibrated: 2021/08/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1589; Calibrated: 2021/08/20
- Phantom: ELI Phantom_2105; Type: QD OVA 004 Ax;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 2.75 W/kg


Pin=50mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 46.25 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 3.23 W/kg

SAR(1 g) = 1.75 W/kg; SAR(10 g) = 0.940 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 2.72 W/kg

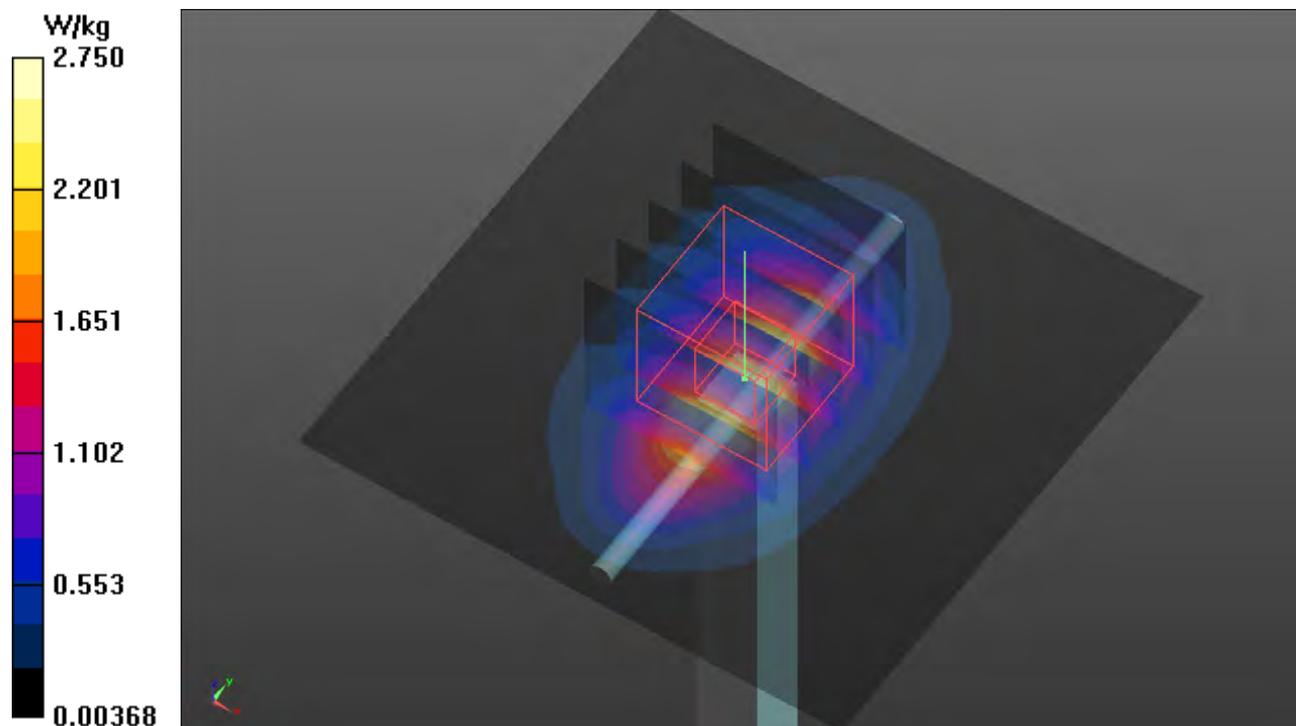

Plots of System Verification

Test Laboratory: Bureau Veritas ADT SAR/HAC Testing Lab

Date: 2022/03/28

S22 System Check_H750_220328

DUT: Dipole 750 MHz; Type: D750V3; SN: 1013

Communication System: UID 0, CW; Frequency: 750 MHz; Duty Cycle: 1:1

Medium: H06T09N1_0328 Medium parameters used: $f = 750$ MHz; $\sigma = 0.895$ S/m; $\epsilon_r = 43.887$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.7 °C ; Liquid Temperature : 23.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7554; ConvF(10.38, 10.38, 10.38) @ 750 MHz; Calibrated: 2021/08/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1589; Calibrated: 2021/08/20
- Phantom: ELI Phantom_2105; Type: QD OVA 004 Ax;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.627 W/kg


Pin=50mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 27.48 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.696 W/kg

SAR(1 g) = 0.453 W/kg; SAR(10 g) = 0.297 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.609 W/kg

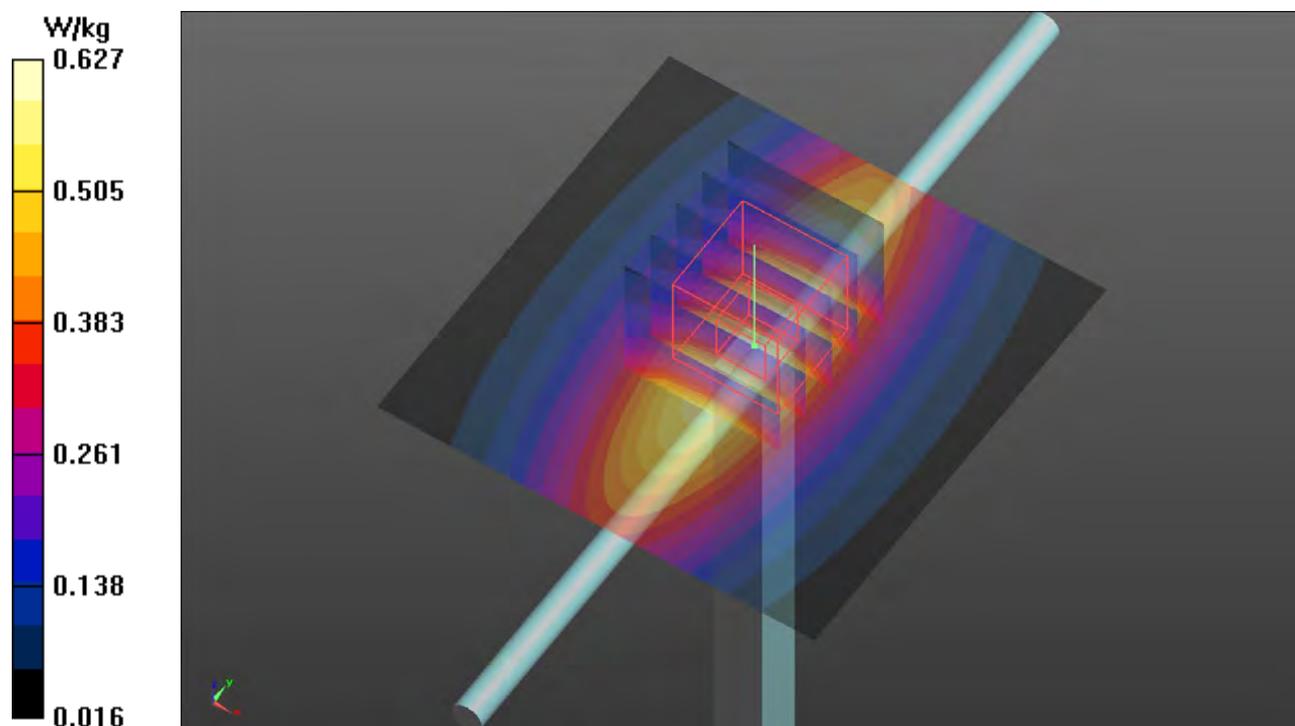

Plots of System Verification

Test Laboratory: Bureau Veritas ADT SAR/HAC Testing Lab

Date: 2022/03/26

S23 System Check_H1900_220326

DUT: Dipole 1900 MHz; Type: D1900V2; SN: 5d036

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: H16T20N1_0326 Medium parameters used: $f = 1900$ MHz; $\sigma = 1.459$ S/m; $\epsilon_r = 38.57$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 23.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7554; ConvF(8.17, 8.17, 8.17) @ 1900 MHz; Calibrated: 2021/08/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1589; Calibrated: 2021/08/20
- Phantom: ELI Phantom_2105; Type: QD OVA 004 Ax;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 3.25 W/kg


Pin=50mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 48.80 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 3.95 W/kg

SAR(1 g) = 2.03 W/kg; SAR(10 g) = 1.08 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 3.30 W/kg

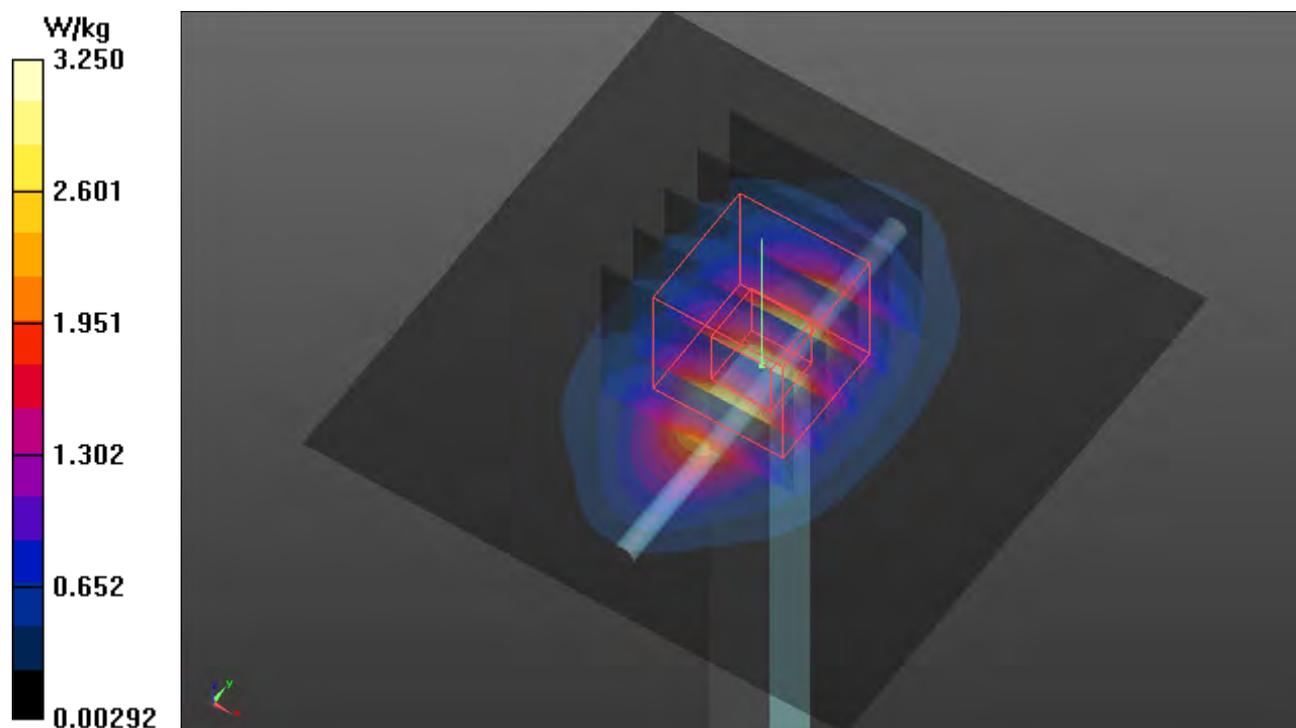

Plots of System Verification

Test Laboratory: Bureau Veritas ADT SAR/HAC Testing Lab

Date: 2022/03/26

S24 System Check_H835_220326

DUT: Dipole 835 MHz; Type: D835V2; SN: 4d121

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: H07T10N1_0326 Medium parameters used: $f = 835$ MHz; $\sigma = 0.931$ S/m; $\epsilon_r = 40.566$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 23.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7554; ConvF(9.92, 9.92, 9.92) @ 835 MHz; Calibrated: 2021/08/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1589; Calibrated: 2021/08/20
- Phantom: ELI Phantom_2105; Type: QD OVA 004 Ax;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.648 W/kg


Pin=50mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 27.79 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.737 W/kg

SAR(1 g) = 0.478 W/kg; SAR(10 g) = 0.316 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.655 W/kg

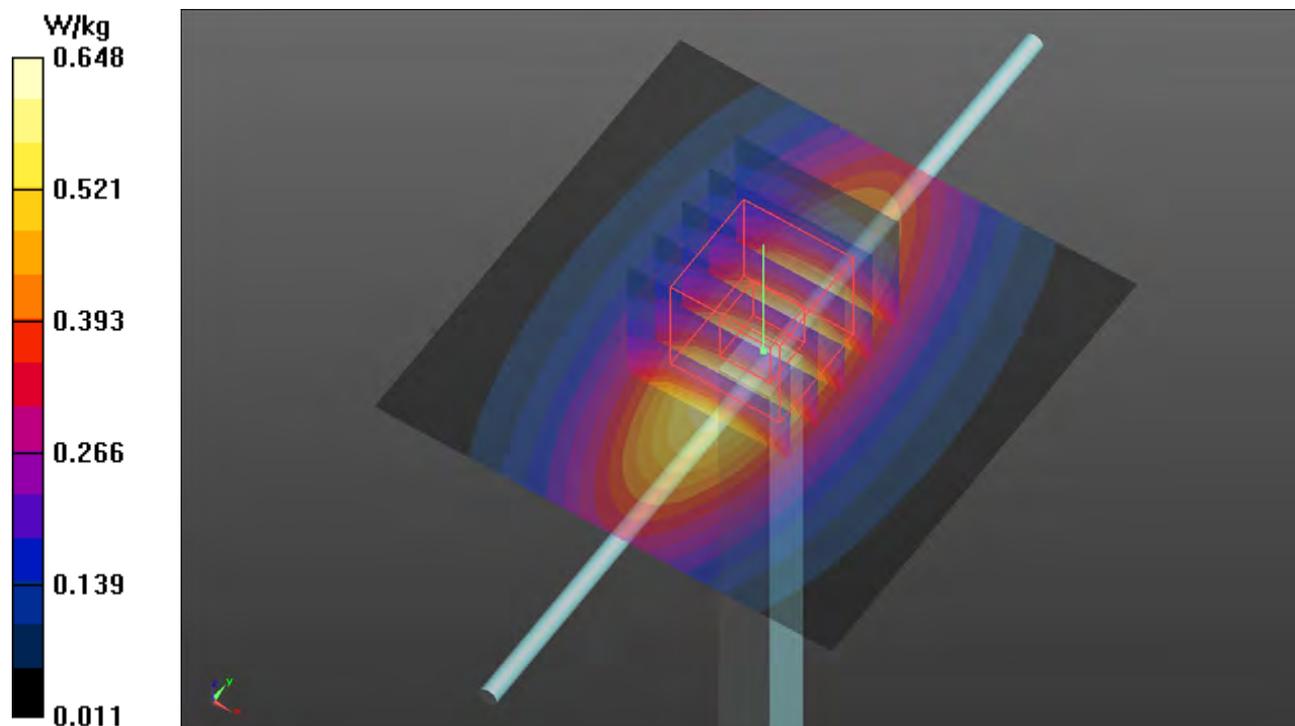

Plots of System Verification

Test Laboratory: Bureau Veritas ADT SAR/HAC Testing Lab

Date: 2022/03/28

S25 System Check_H2600_220328

DUT: Dipole 2600 MHz; Type: D2600V2; SN: 1020

Communication System: UID 0, CW; Frequency: 2600 MHz; Duty Cycle: 1:1

Medium: H19T27N1_0328 Medium parameters used: $f = 2600$ MHz; $\sigma = 2.029$ S/m; $\epsilon_r = 37.61$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.7 °C ; Liquid Temperature : 23.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7554; ConvF(7.3, 7.3, 7.3) @ 2600 MHz; Calibrated: 2021/08/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1589; Calibrated: 2021/08/20
- Phantom: ELI Phantom_2105; Type: QD OVA 004 Ax;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (81x81x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 5.46 W/kg


Pin=50mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 52.33 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 6.91 W/kg

SAR(1 g) = 3.04 W/kg; SAR(10 g) = 1.38 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 5.41 W/kg

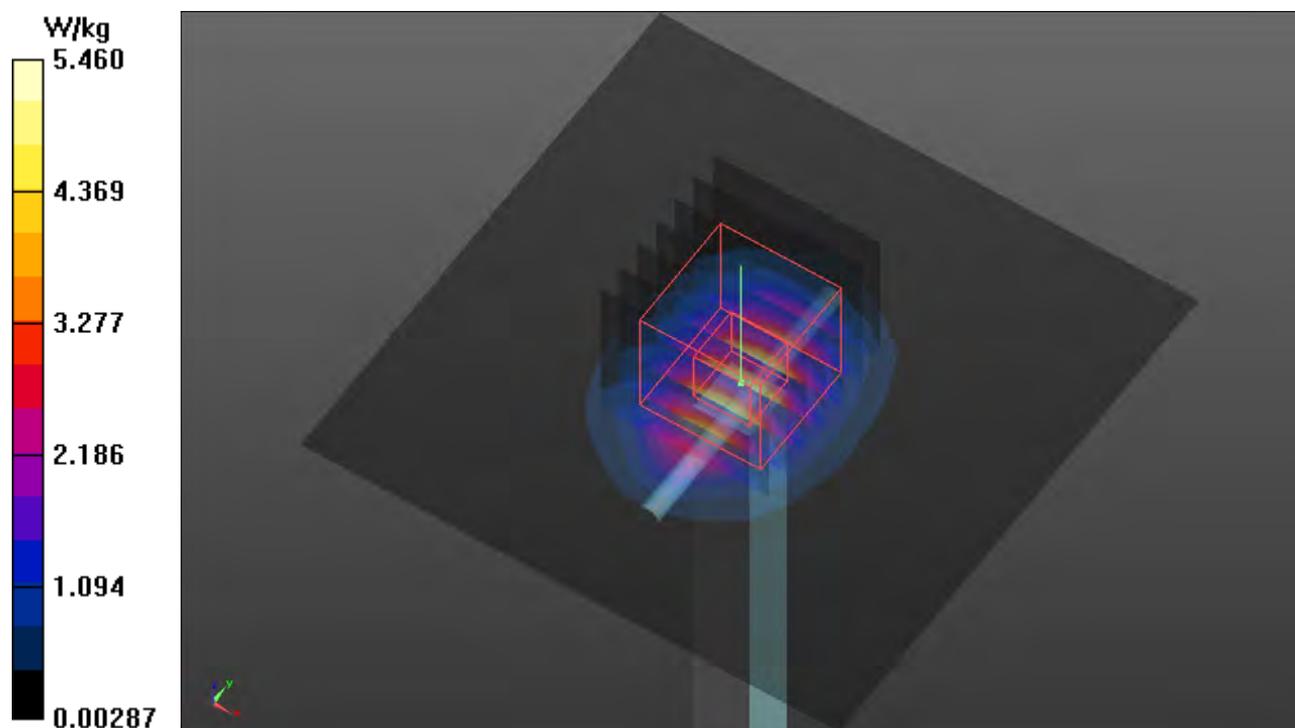

Plots of System Verification

Test Laboratory: Bureau Veritas ADT SAR/HAC Testing Lab

Date: 2022/03/25

S26 System Check_H1900_220325

DUT: Dipole 1900 MHz; Type: D1900V2; SN: 5d036

Communication System: UID 0, CW (0); Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: H16T20N1_0325 Medium parameters used: $f = 1900$ MHz; $\sigma = 1.45$ S/m; $\epsilon_r = 39.054$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C ; Liquid Temperature : 23.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3820; ConvF(7.35, 7.35, 7.35) @ 1900 MHz; Calibrated: 2021/07/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1431; Calibrated: 2022/02/23
- Phantom: ELI Phantom_1206; Type: QDOVA001BB;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=50mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 2.80 W/kg


Pin=50mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 45.30 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 3.28 W/kg

SAR(1 g) = 1.93 W/kg; SAR(10 g) = 1.01 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 2.75 W/kg

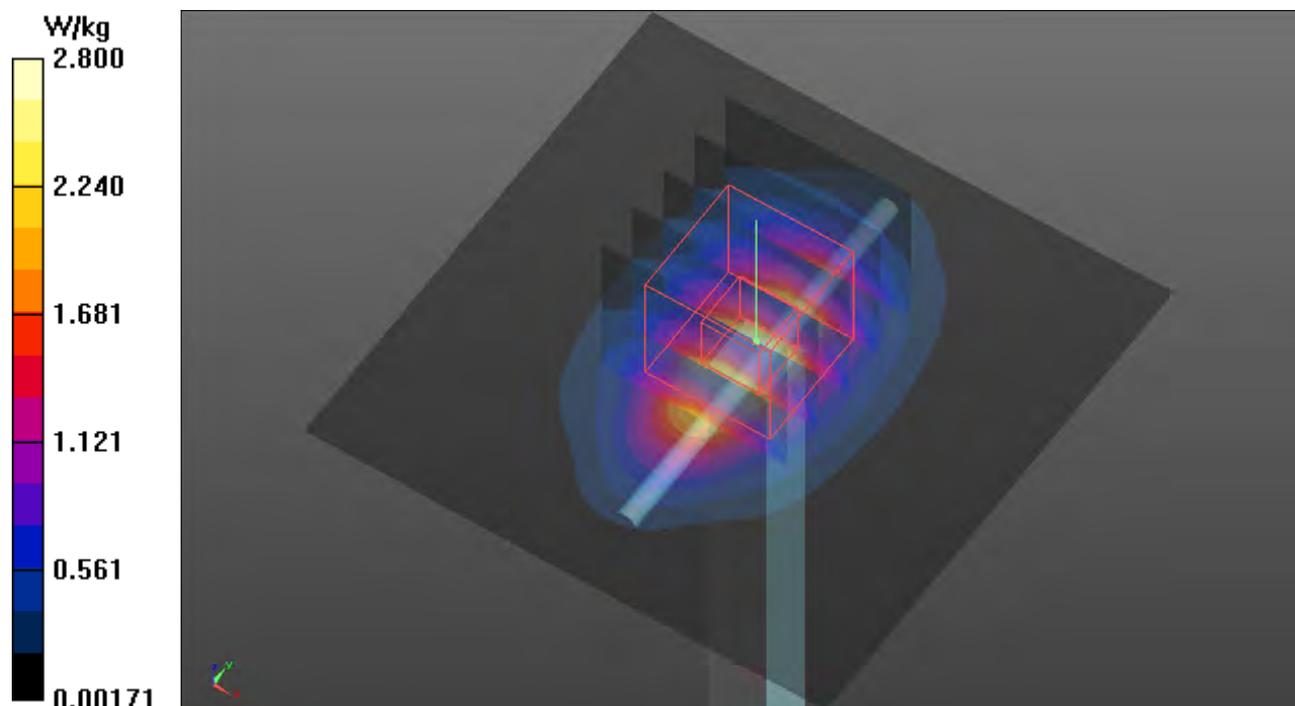

Plots of System Verification

Test Laboratory: Bureau Veritas ADT SAR/HAC Testing Lab

Date: 2022/03/29

S27 System Check_H2300_220329

DUT: Dipole 2300 MHz; Type: D2300V2; SN:1004

Communication System: UID 0, CW; Frequency: 2300 MHz; Duty Cycle: 1:1

Medium: H19T27N1_0329 Medium parameters used: $f = 2300$ MHz; $\sigma = 1.716$ S/m; $\epsilon_r = 38.469$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.7 °C ; Liquid Temperature : 23.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7554; ConvF(7.68, 7.68, 7.68) @ 2300 MHz; Calibrated: 2021/08/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1589; Calibrated: 2021/08/20
- Phantom: ELI Phantom_2105; Type: QD OVA 004 Ax;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (81x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 4.24 W/kg


Pin=50mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 50.45 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 5.17 W/kg

SAR(1 g) = 2.46 W/kg; SAR(10 g) = 1.18 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 4.16 W/kg

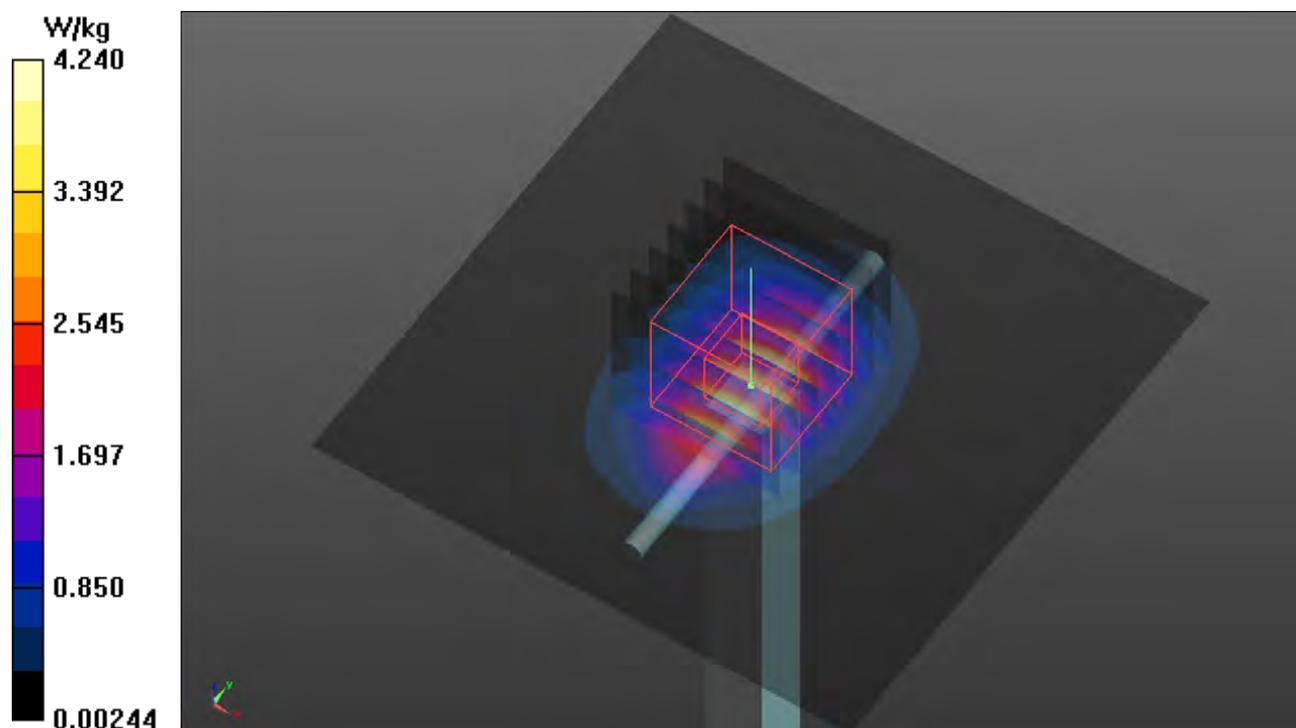

Plots of System Verification

Test Laboratory: Bureau Veritas ADT SAR/HAC Testing Lab

Date: 2022/03/30

S28 System Check_H2600_220330

DUT: Dipole 2600 MHz; Type: D2600V2; SN: 1020

Communication System: UID 0, CW; Frequency: 2600 MHz; Duty Cycle: 1:1

Medium: H19T27N0_0330 Medium parameters used: $f = 2600$ MHz; $\sigma = 2.049$ S/m; $\epsilon_r = 37.987$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.7 °C ; Liquid Temperature : 23.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7554; ConvF(7.3, 7.3, 7.3) @ 2600 MHz; Calibrated: 2021/08/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1589; Calibrated: 2021/08/20
- Phantom: ELI Phantom_2105; Type: QD OVA 004 Ax;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (81x81x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 4.93 W/kg


Pin=50mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 50.77 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 6.15 W/kg

SAR(1 g) = 2.76 W/kg; SAR(10 g) = 1.27 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 4.87 W/kg

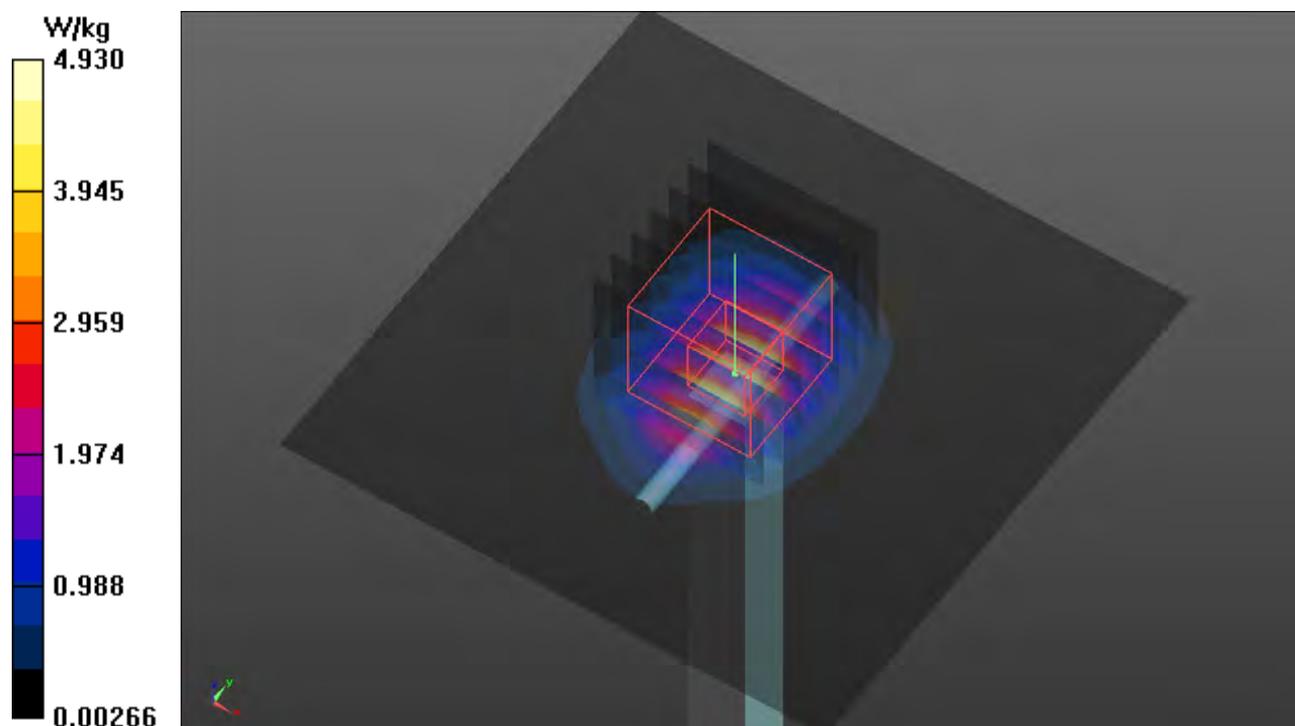

Plots of System Verification

Test Laboratory: Bureau Veritas ADT SAR/HAC Testing Lab

Date: 2022/03/30

S29 System Check_H2300_220330

DUT: Dipole 2300 MHz; Type: D2300V2; SN:1004

Communication System: UID 0, CW; Frequency: 2300 MHz; Duty Cycle: 1:1

Medium: H19T27N0_0330 Medium parameters used: $f = 2300$ MHz; $\sigma = 1.714$ S/m; $\epsilon_r = 39.064$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.7 °C ; Liquid Temperature : 23.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7554; ConvF(7.68, 7.68, 7.68) @ 2300 MHz; Calibrated: 2021/08/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1589; Calibrated: 2021/08/20
- Phantom: ELI Phantom_2105; Type: QD OVA 004 Ax;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (81x81x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 4.23 W/kg


Pin=50mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 50.45 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 5.16 W/kg

SAR(1 g) = 2.46 W/kg; SAR(10 g) = 1.18 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 4.16 W/kg

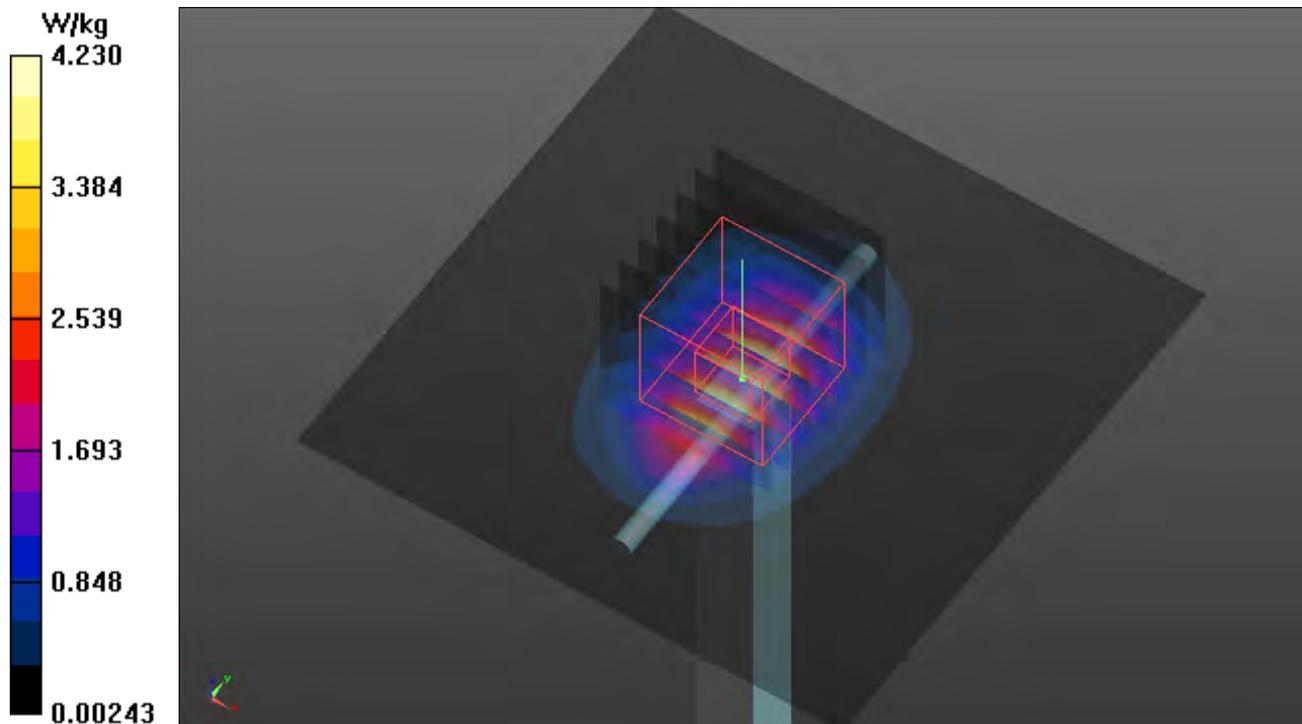

Plots of System Verification

Test Laboratory: Bureau Veritas ADT SAR/HAC Testing Lab

Date: 2022/04/02

S30 System Check_H2600_220402

DUT: Dipole 2600 MHz; Type: D2600V2; SN: 1020

Communication System: UID 0, CW; Frequency: 2600 MHz; Duty Cycle: 1:1

Medium: H19T27N0_0402 Medium parameters used: $f = 2600$ MHz; $\sigma = 2.048$ S/m; $\epsilon_r = 37.972$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C ; Liquid Temperature : 23.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7554; ConvF(7.3, 7.3, 7.3) @ 2600 MHz; Calibrated: 2021/08/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1589; Calibrated: 2021/08/20
- Phantom: ELI Phantom_2105; Type: QD OVA 004 Ax;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (81x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 4.93 W/kg


Pin=50mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 50.77 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 6.15 W/kg

SAR(1 g) = 2.75 W/kg; SAR(10 g) = 1.27 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 4.87 W/kg

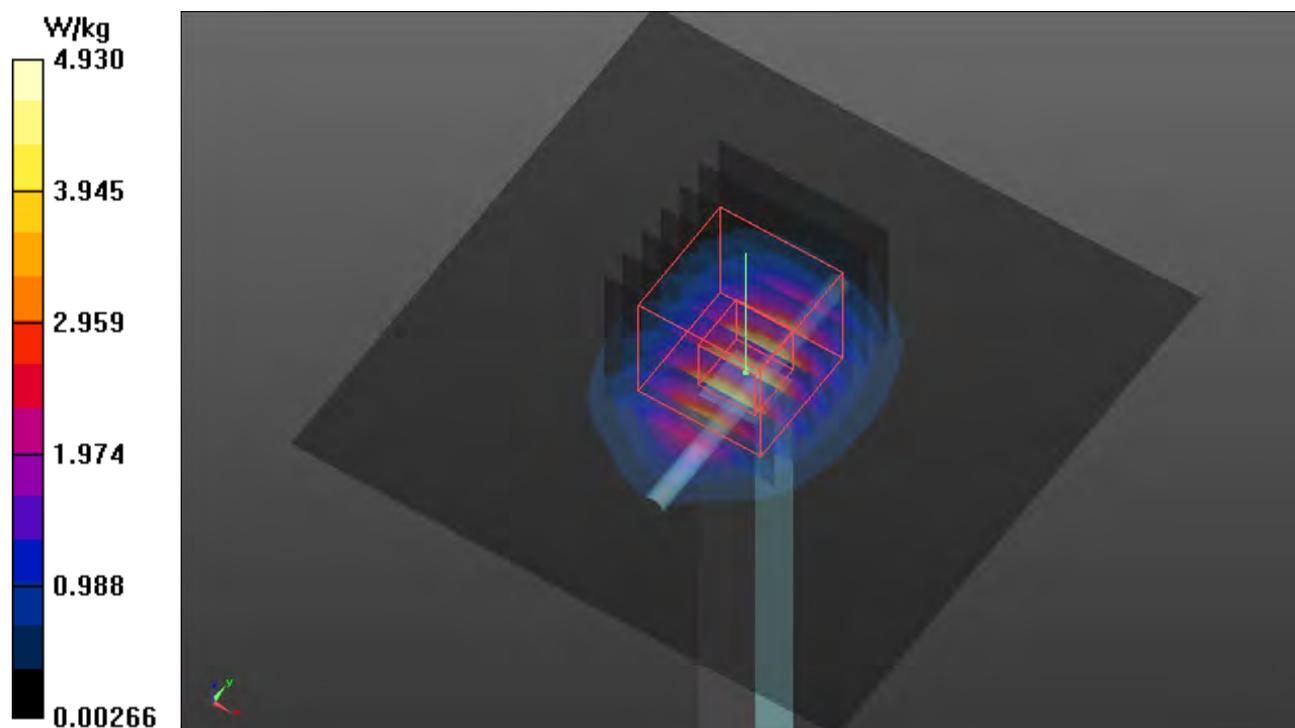

Plots of System Verification

Test Laboratory: Bureau Veritas ADT SAR/HAC Testing Lab

Date: 2022/03/22

S32 System Check_H1750_220322

DUT: Dipole 1750 MHz; Type: D1750V2; SN: 1055

Communication System: UID 0, CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium: H16T20N2_0322 Medium parameters used: $f = 1750$ MHz; $\sigma = 1.374$ S/m; $\epsilon_r = 41.484$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 23.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7554; ConvF(8.54, 8.54, 8.54) @ 1750 MHz; Calibrated: 2021/08/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1589; Calibrated: 2021/08/20
- Phantom: ELI Phantom_2105; Type: QD OVA 004 Ax;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 2.76 W/kg


Pin=50mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 46.25 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 3.25 W/kg

SAR(1 g) = 1.78 W/kg; SAR(10 g) = 0.951 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 2.74 W/kg

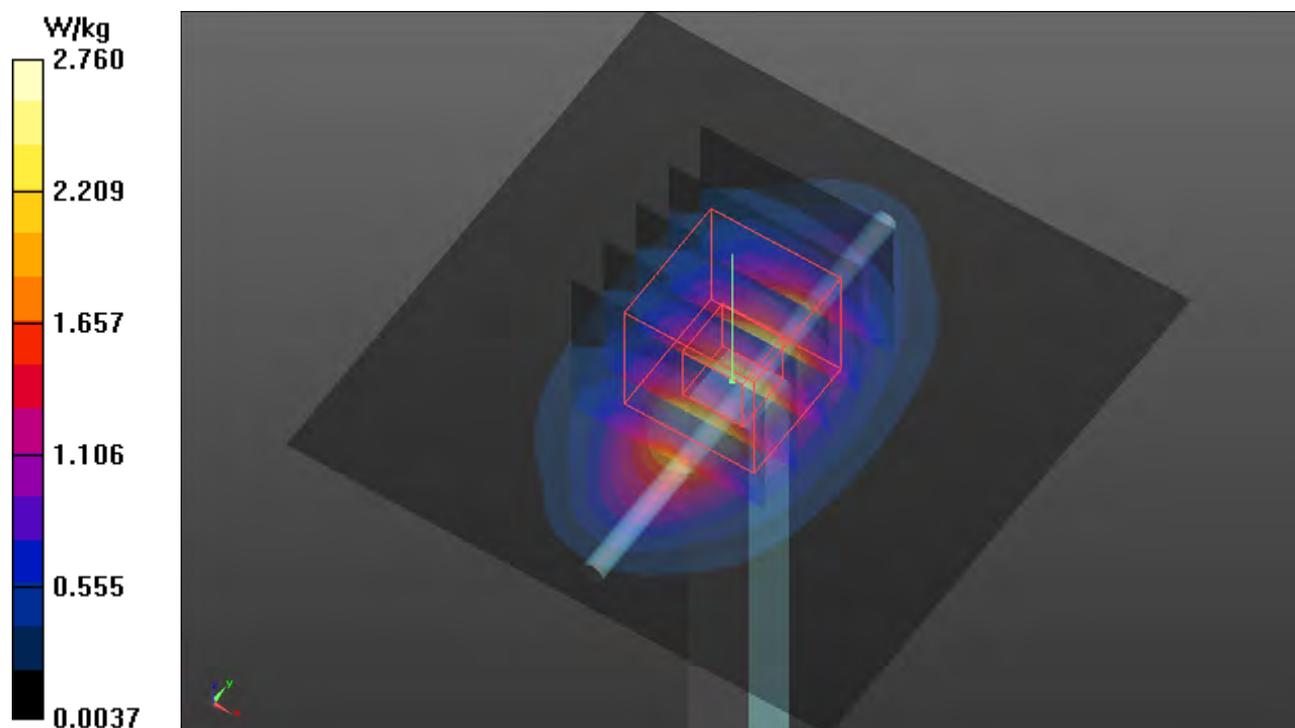

Plots of System Verification

Test Laboratory: Bureau Veritas ADT SAR/HAC Testing Lab

Date: 2022/03/28

S33 System Check_H750_220328

DUT: Dipole 750 MHz; Type: D750V3; SN: 1013

Communication System: UID 0, CW; Frequency: 750 MHz; Duty Cycle: 1:1

Medium: H06T09N1_0328 Medium parameters used: $f = 750$ MHz; $\sigma = 0.895$ S/m; $\epsilon_r = 43.887$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.7 °C ; Liquid Temperature : 23.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7554; ConvF(10.38, 10.38, 10.38) @ 750 MHz; Calibrated: 2021/08/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1589; Calibrated: 2021/08/20
- Phantom: ELI Phantom_2105; Type: QD OVA 004 Ax;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.627 W/kg


Pin=50mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 27.48 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.696 W/kg

SAR(1 g) = 0.453 W/kg; SAR(10 g) = 0.297 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.609 W/kg

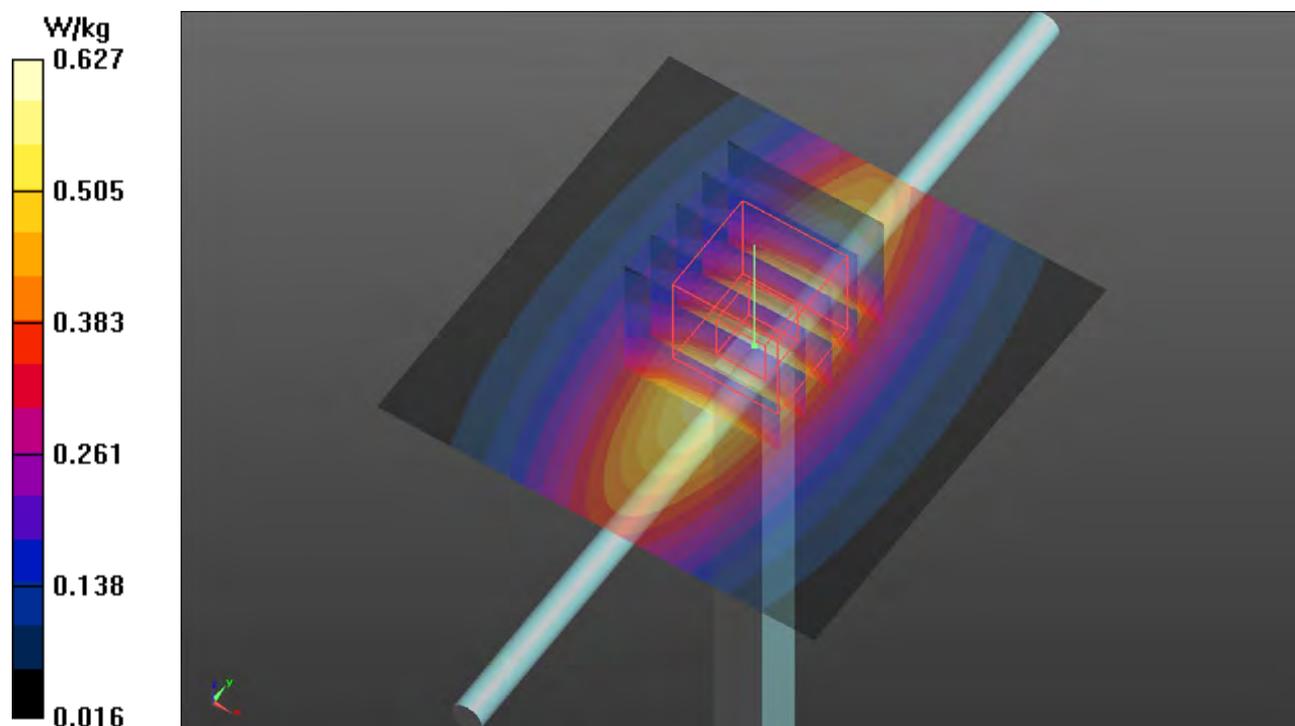

Plots of System Verification

Test Laboratory: Bureau Veritas ADT SAR/HAC Testing Lab

Date: 2022/04/02

S34a System Check_H3700_220402

DUT: Dipole 3700 MHz; Type:D3700V2; SN: 1017

Communication System: UID 0, CW; Frequency: 3700 MHz; Duty Cycle: 1:1

Medium: H33T42N1_0402 Medium parameters used: $f = 3700$ MHz; $\sigma = 3.108$ S/m; $\epsilon_r = 36.356$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C ; Liquid Temperature : 23.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7554; ConvF(6.7, 6.7, 6.7) @ 3700 MHz; Calibrated: 2021/08/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1589; Calibrated: 2021/08/20
- Phantom: ELI Phantom_2105; Type: QD OVA 004 Ax;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (81x81x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 6.95 W/kg


Pin=50mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=2.5$ mm

Reference Value = 49.83 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 9.44 W/kg

SAR(1 g) = 3.46 W/kg; SAR(10 g) = 1.3 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 6.91 W/kg

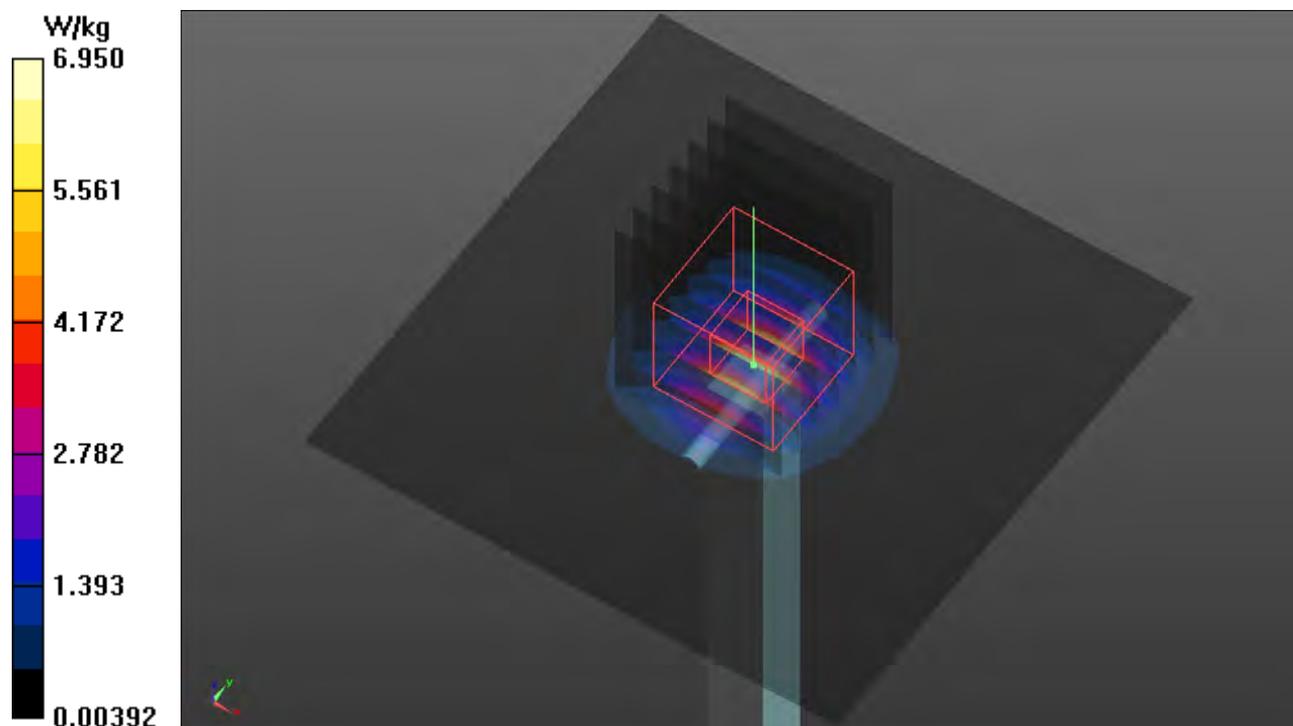

Plots of System Verification

Test Laboratory: Bureau Veritas ADT SAR/HAC Testing Lab

Date: 2022/04/02

S34b System Check_H3900_220402

DUT: Dipole 3900 MHz D3900V2

Communication System: UID 0, CW; Frequency: 3900 MHz; Duty Cycle: 1:1

Medium: H33T42N1_0402 Medium parameters used: $f = 3900$ MHz; $\sigma = 3.204$ S/m; $\epsilon_r = 36.371$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C ; Liquid Temperature : 23.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7554; ConvF(6.6, 6.6, 6.6) @ 3900 MHz; Calibrated: 2021/08/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1589; Calibrated: 2021/08/20
- Phantom: ELI Phantom_2105; Type: QD OVA 004 Ax;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (81x81x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 5.40 W/kg


Pin=50mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=2.5$ mm

Reference Value = 43.01 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 7.20 W/kg

SAR(1 g) = 3.73 W/kg; SAR(10 g) = 1.25 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 5.29 W/kg

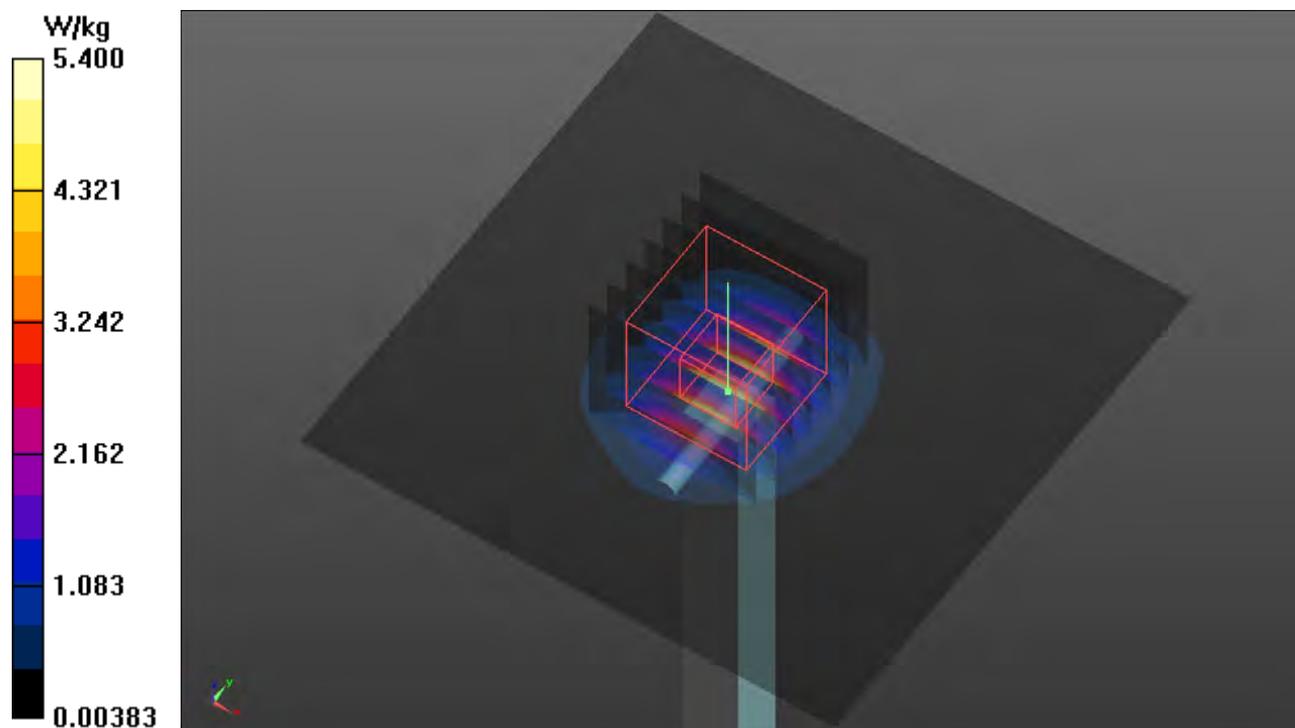

Plots of System Verification

Test Laboratory: Bureau Veritas ADT SAR/HAC Testing Lab

Date: 2022/04/02

S35 System Check_H3700_220402

DUT: Dipole 3700 MHz; Type:D3700V2; SN: 1017

Communication System: UID 0, CW; Frequency: 3700 MHz; Duty Cycle: 1:1

Medium: H33T42N1_0402 Medium parameters used: $f = 3700$ MHz; $\sigma = 3.108$ S/m; $\epsilon_r = 36.356$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C ; Liquid Temperature : 23.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7554; ConvF(6.7, 6.7, 6.7) @ 3700 MHz; Calibrated: 2021/08/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1589; Calibrated: 2021/08/20
- Phantom: ELI Phantom_2105; Type: QD OVA 004 Ax;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (81x81x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 6.95 W/kg


Pin=50mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=2.5$ mm

Reference Value = 49.83 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 9.44 W/kg

SAR(1 g) = 3.46 W/kg; SAR(10 g) = 1.3 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 6.91 W/kg

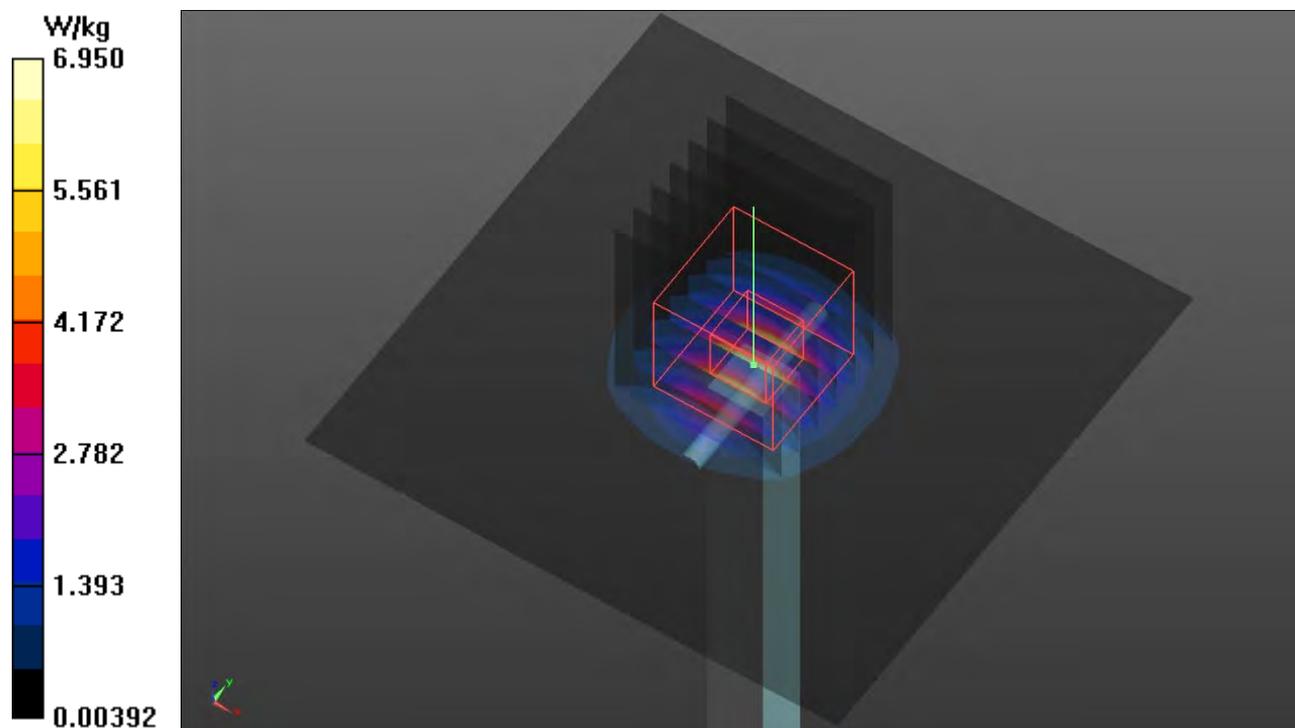

Plots of System Verification

Test Laboratory: Bureau Veritas ADT SAR/HAC Testing Lab

Date: 2022/03/21

S36 System Check_H2450_220321

DUT: Dipole 2450 MHz; Type: D2450V2; SN: 737

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: H19T27N1_0321 Medium parameters used (interpolated): $f = 2450$ MHz; $\sigma = 1.883$ S/m; $\epsilon_r = 38.286$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 23.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7555; ConvF(7.9, 7.9, 7.9) @ 2450 MHz; Calibrated: 2021/09/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1341; Calibrated: 2021/08/20
- Phantom: ELI Phantom_1043; Type: QD OVA 002 Ax;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (81x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 4.22 W/kg


Pin=50mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 48.14 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 5.28 W/kg

SAR(1 g) = 2.51 W/kg; SAR(10 g) = 1.22 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 4.26 W/kg

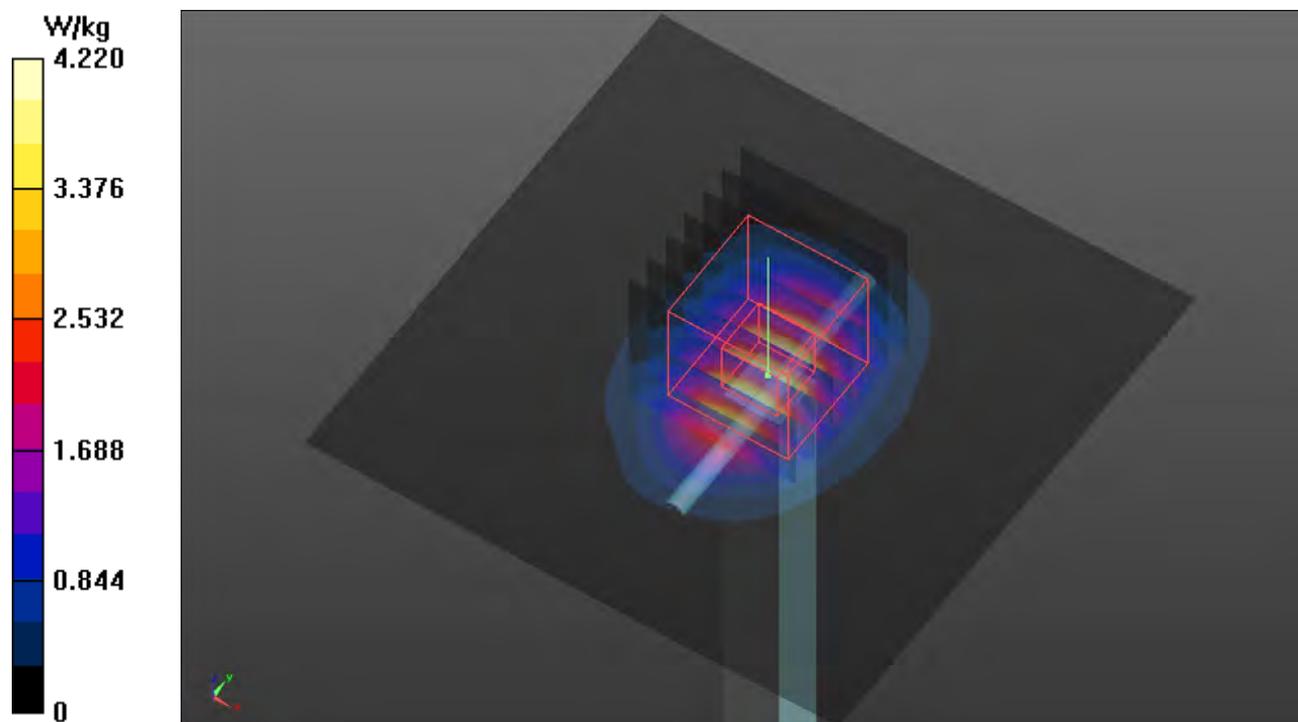

Plots of System Verification

Test Laboratory: Bureau Veritas ADT SAR/HAC Testing Lab

Date: 2022/03/21

S37 System Check_H5250_220321

DUT: Dipole 5 GHz; Type: D5GHZV2; SN: 1019

Communication System: UID 0, CW; Frequency: 5250 MHz; Duty Cycle: 1:1

Medium: H34T60N1_0321 Medium parameters used: $f = 5250$ MHz; $\sigma = 4.607$ S/m; $\epsilon_r = 34.846$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 23.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7555; ConvF(5.45, 5.45, 5.45) @ 5250 MHz; Calibrated: 2021/09/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1341; Calibrated: 2021/08/20
- Phantom: ELI Phantom_1043; Type: QD OVA 002 Ax;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (91x91x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 6.57 W/kg


Pin=50mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 44.12 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 11.6 W/kg

SAR(1 g) = 3.78 W/kg; SAR(10 g) = 1.25 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 7.66 W/kg

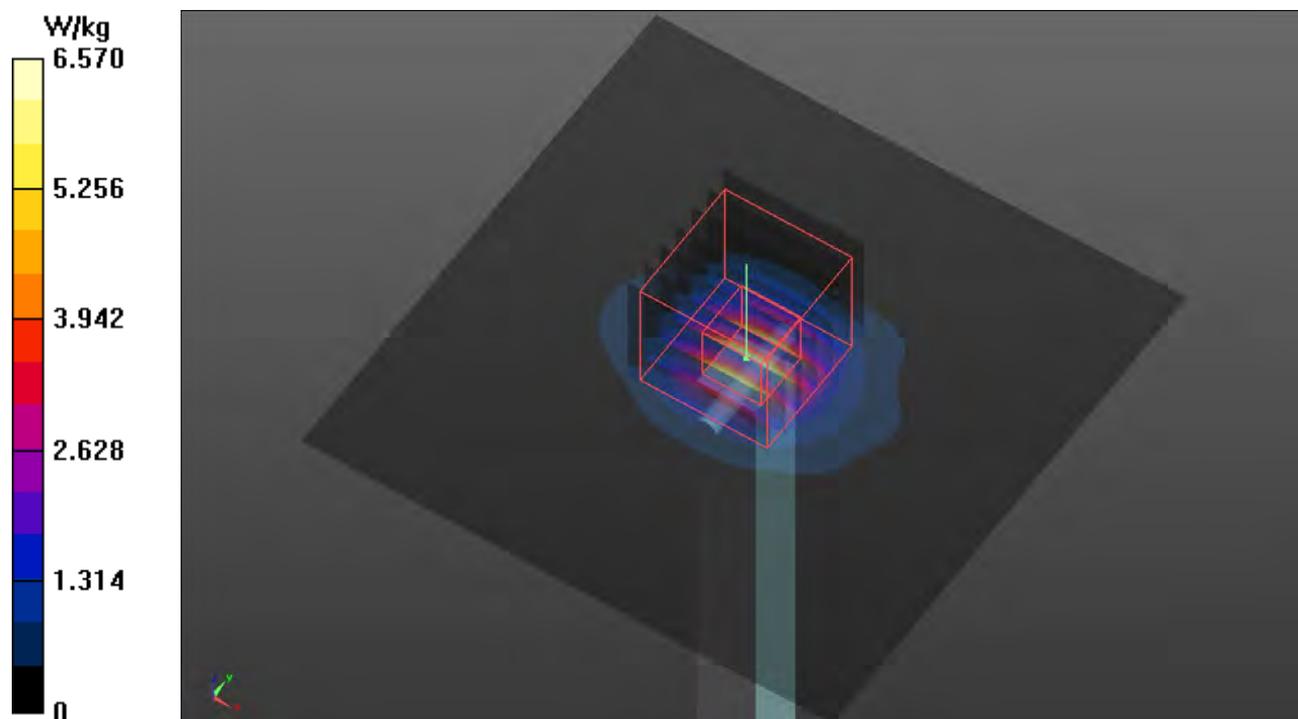

Plots of System Verification

Test Laboratory: Bureau Veritas ADT SAR/HAC Testing Lab

Date: 2022/03/20

S38 System Check_H5600_220320

DUT: Dipole 5 GHz; Type: D5GHzV2; SN: 1019

Communication System: UID 0, CW; Frequency: 5600 MHz; Duty Cycle: 1:1

Medium: H34T60N1_0320 Medium parameters used: $f = 5600$ MHz; $\sigma = 5.178$ S/m; $\epsilon_r = 34.66$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C ; Liquid Temperature : 23.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7555; ConvF(4.8, 4.8, 4.8) @ 5600 MHz; Calibrated: 2021/09/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1341; Calibrated: 2021/08/20
- Phantom: ELI Phantom_1043; Type: QD OVA 002 Ax;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (91x91x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 8.22 W/kg


Pin=50mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 45.64 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 14.9 W/kg

SAR(1 g) = 3.89 W/kg; SAR(10 g) = 1.12 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 9.33 W/kg

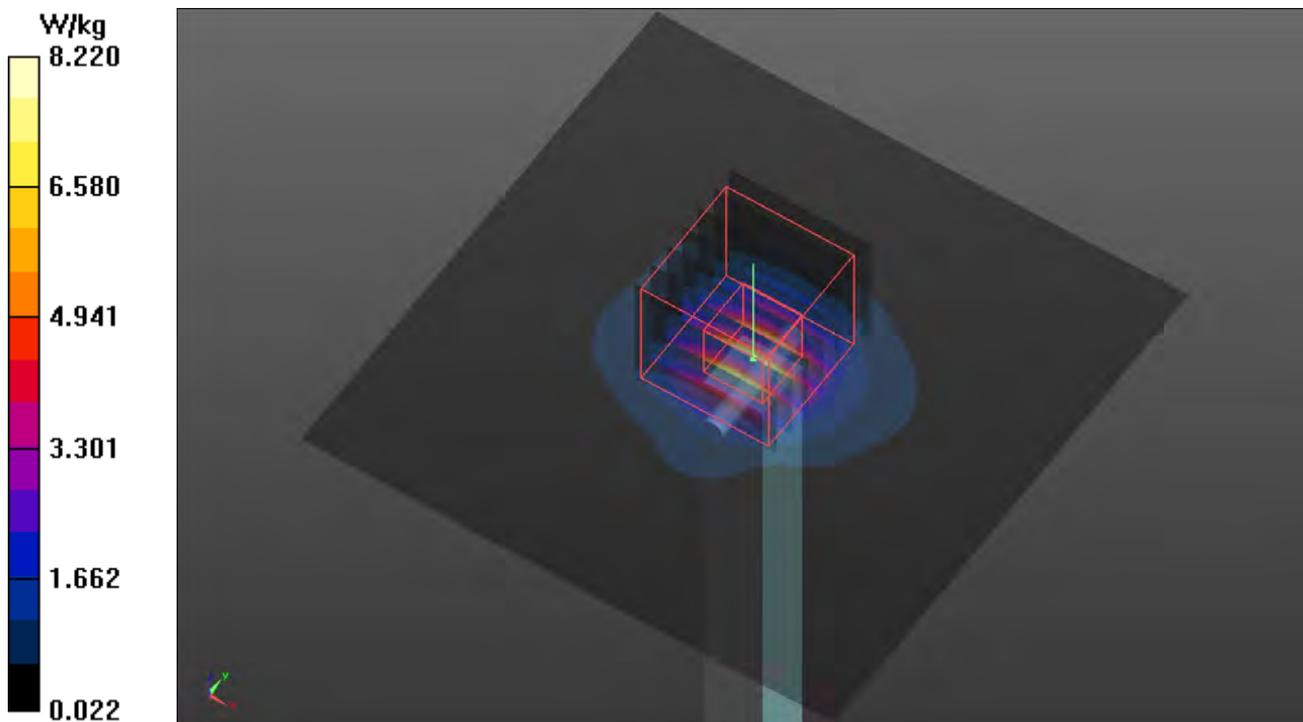

Plots of System Verification

Test Laboratory: Bureau Veritas ADT SAR/HAC Testing Lab

Date: 2022/03/21

S39 System Check_H5750_220321

DUT: Dipole 5 GHz; Type: D5GHZV2; SN: 1019

Communication System: UID 0, CW; Frequency: 5750 MHz; Duty Cycle: 1:1

Medium: H34T60N1_0321 Medium parameters used: $f = 5750$ MHz; $\sigma = 5.133$ S/m; $\epsilon_r = 34.387$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 23.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7555; ConvF(5, 5, 5) @ 5750 MHz; Calibrated: 2021/09/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1341; Calibrated: 2021/08/20
- Phantom: ELI Phantom_1043; Type: QD OVA 002 Ax;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (91x91x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 6.62 W/kg


Pin=50mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 41.80 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 13.1 W/kg

SAR(1 g) = 4.16 W/kg; SAR(10 g) = 1.41 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 7.86 W/kg

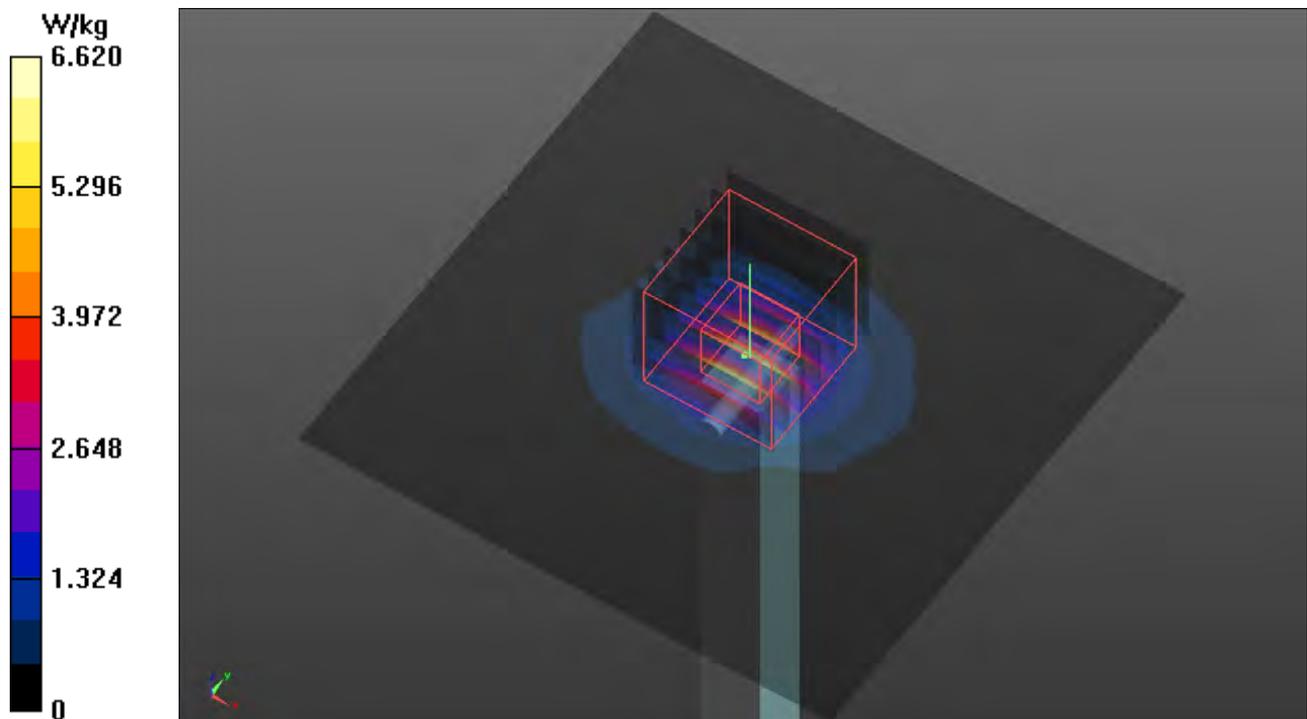

Plots of System Verification

Test Laboratory: Bureau Veritas ADT SAR/HAC Testing Lab

Date: 2022/03/20

S40 System Check_H2450_220320

DUT: Dipole 2450 MHz; Type: D2450V2; SN: 737

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: H19T27N1_0320 Medium parameters used (interpolated): $f = 2450$ MHz; $\sigma = 1.877$ S/m; $\epsilon_r = 38.405$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C ; Liquid Temperature : 23.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7555; ConvF(7.9, 7.9, 7.9) @ 2450 MHz; Calibrated: 2021/09/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1341; Calibrated: 2021/08/20
- Phantom: ELI Phantom_1043; Type: QD OVA 002 Ax;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (81x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 4.21 W/kg


Pin=50mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 48.14 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 5.26 W/kg

SAR(1 g) = 2.51 W/kg; SAR(10 g) = 1.22 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 4.25 W/kg

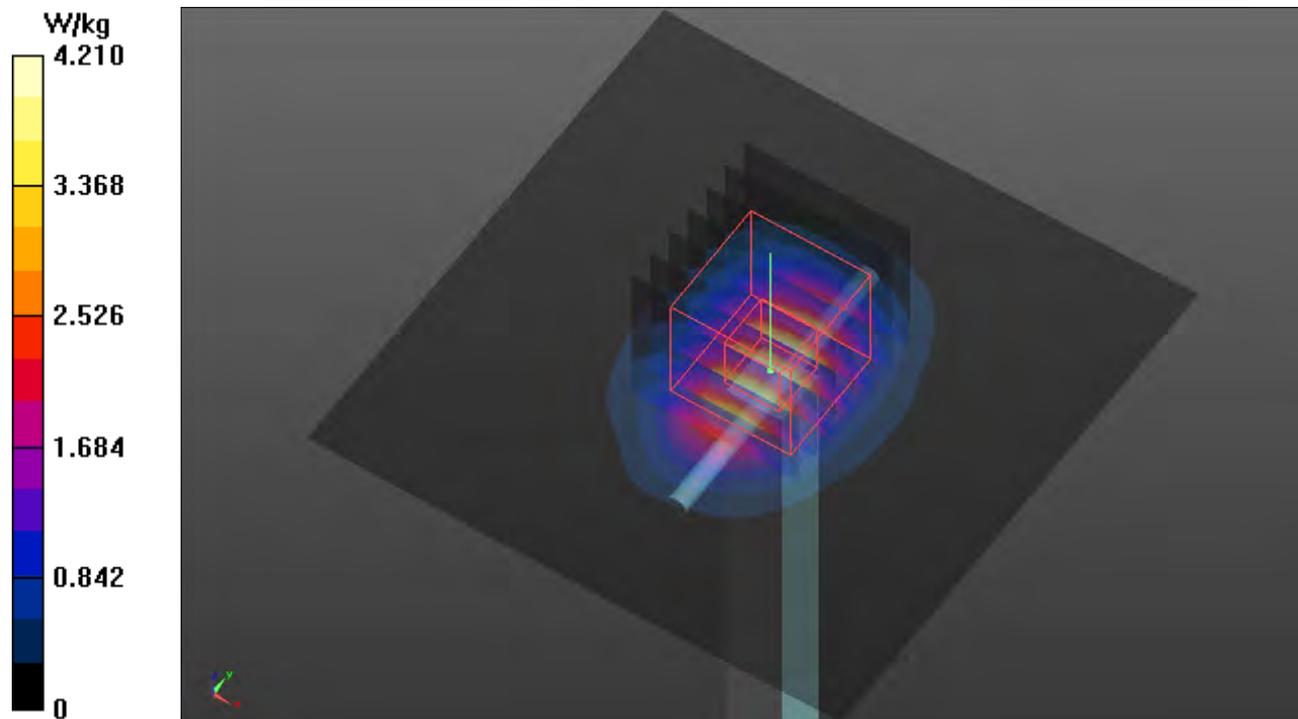

Annex B. Plots of Measurement

The SAR plots for highest measured SAR in each exposure configuration, wireless mode and frequency band combination are shown as follows.

Plots of System Verification

Test Laboratory: Bureau Veritas ADT SAR/HAC Testing Lab

Date: 2022/03/29

P01 WCDMA II_RMC12.2K_Rear Face_0mm_Ch9262_Ant 0_w

DUT: BFLF-WTW-P22030374

Communication System: UID 10011 - CAB, UMTS-FDD (WCDMA); Frequency: 1852.4 MHz; Duty Cycle: 1:1.95
Medium: H16T20N1_0329 Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.417$ S/m; $\epsilon_r = 38.449$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 23.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3820; ConvF(7.35, 7.35, 7.35) @ 1852.4 MHz; Calibrated: 2021/07/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1431; Calibrated: 2022/02/23
- Phantom: ELI Phantom_1206; Type: QDOVA001BB;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (71x281x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.15 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 29.53 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 1.58 W/kg

SAR(1 g) = 0.613 W/kg; SAR(10 g) = 0.262 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 9.2 mm

Ratio of SAR at M2 to SAR at M1 = 50.2%

Maximum value of SAR (measured) = 1.23 W/kg

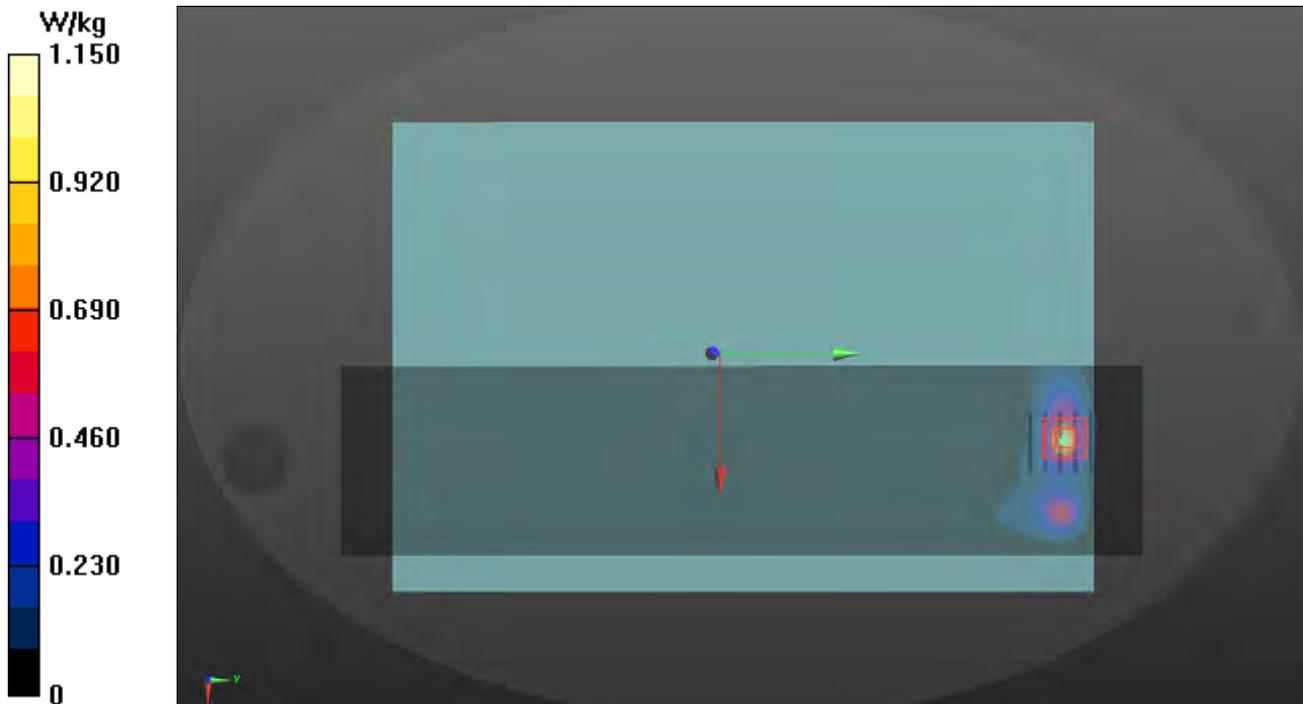

Plots of System Verification

Test Laboratory: Bureau Veritas ADT SAR/HAC Testing Lab

Date: 2022/03/23

P02 WCDMA IV_RMC12.2K_Bottom for Laptop_0mm_Ch1413_Ant 0_w

DUT: BFLF-WTW-P22030374

Communication System: UID 10011 - CAB, UMTS-FDD (WCDMA); Frequency: 1732.6 MHz; Duty Cycle: 1:1.95
Medium: H16T20N1_0323 Medium parameters used: $f = 1733$ MHz; $\sigma = 1.265$ S/m; $\epsilon_r = 43.579$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.5 °C ; Liquid Temperature : 23.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3820; ConvF(7.66, 7.66, 7.66) @ 1732.6 MHz; Calibrated: 2021/07/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1431; Calibrated: 2022/02/23
- Phantom: ELI Phantom_1206; Type: QDOVA001BB;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (71x271x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.654 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.31 V/m; Power Drift = 0.12 dB


Peak SAR (extrapolated) = 0.858 W/kg

SAR(1 g) = 0.519 W/kg; SAR(10 g) = 0.296 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 10.2 mm

Ratio of SAR at M2 to SAR at M1 = 58%

Maximum value of SAR (measured) = 0.705 W/kg

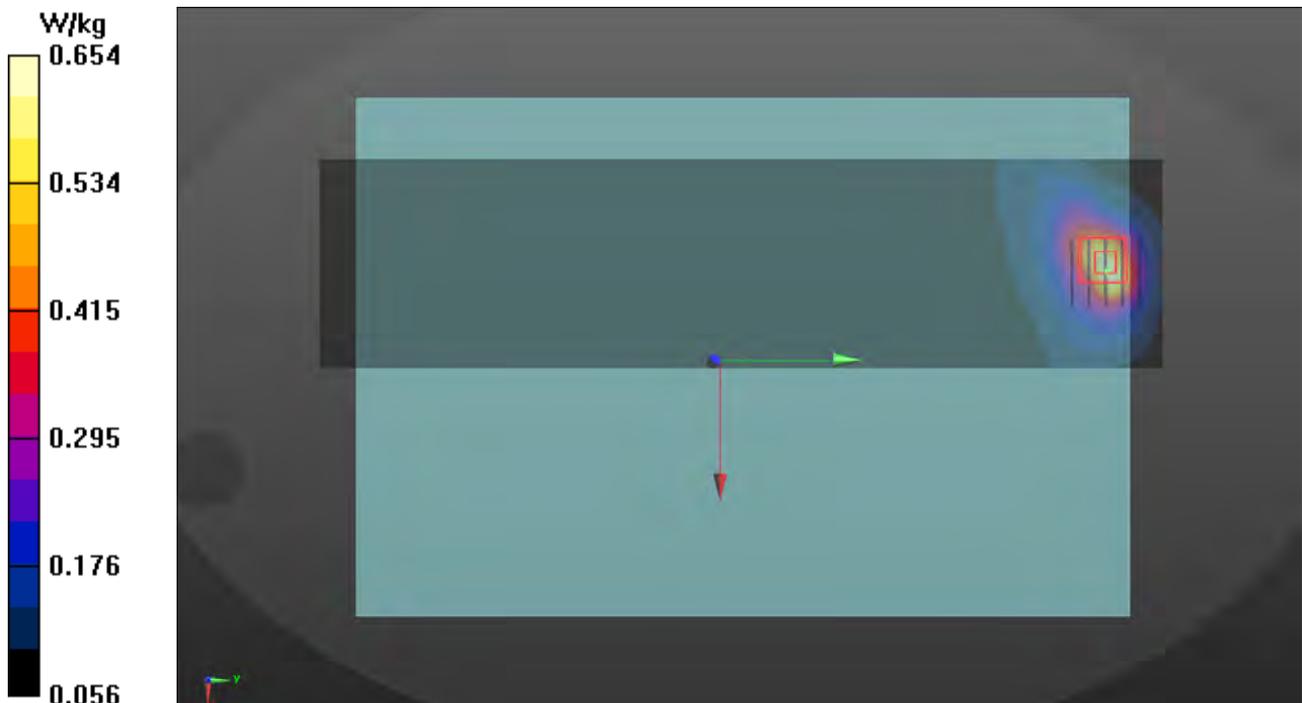

Plots of System Verification

Test Laboratory: Bureau Veritas ADT SAR/HAC Testing Lab

Date: 2022/03/23

P03 WCDMA V_RMC12.2K_Bottom for Laptop_0mm_Ch4182_Ant 0_w

DUT: BFLF-WTW-P22030374

Communication System: UID 10011 - CAB, UMTS-FDD (WCDMA); Frequency: 836.4 MHz; Duty Cycle: 1:1.95
Medium: H07T10N1_0323 Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.917$ S/m; $\epsilon_r = 40.605$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 23.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3820; ConvF(9.09, 9.09, 9.09) @ 836.4 MHz; Calibrated: 2021/07/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1431; Calibrated: 2022/02/23
- Phantom: ELI Phantom_1206; Type: QDOVA001BB;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (81x281x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.655 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 26.21 V/m; Power Drift = -0.06 dB


Peak SAR (extrapolated) = 0.873 W/kg

SAR(1 g) = 0.602 W/kg; SAR(10 g) = 0.375 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 14.4 mm

Ratio of SAR at M2 to SAR at M1 = 63.4%

Maximum value of SAR (measured) = 0.746 W/kg

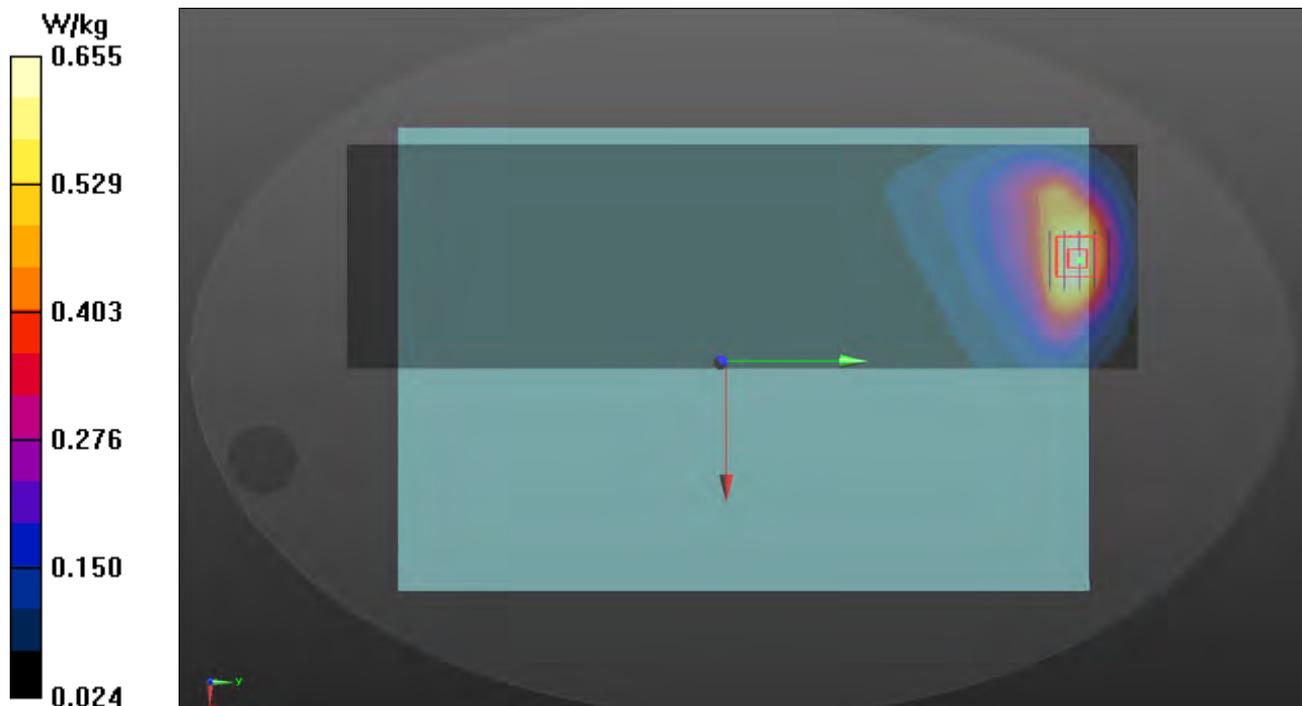

Plots of System Verification

Test Laboratory: Bureau Veritas ADT SAR/HAC Testing Lab

Date: 2022/03/29

P04 LTE 2_QPSK20M_Rear Face_0mm_Ch18700_1RB_OS0_Ant 0_w

DUT: BFLF-WTW-P22030374

Communication System: UID 10169 - CAE, LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK); Frequency: 1860 MHz; Duty Cycle: 1:3.74

Medium: H16T20N1_0329 Medium parameters used: $f = 1860$ MHz; $\sigma = 1.423$ S/m; $\epsilon_r = 38.42$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 23.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3820; ConvF(7.35, 7.35, 7.35) @ 1860 MHz; Calibrated: 2021/07/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1431; Calibrated: 2022/02/23
- Phantom: ELI Phantom_1206; Type: QDOVA001BB;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (71x281x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.25 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 30.82 V/m; Power Drift = -0.12 dB


Peak SAR (extrapolated) = 1.58 W/kg

SAR(1 g) = 0.657 W/kg; SAR(10 g) = 0.289 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8.5 mm

Ratio of SAR at M2 to SAR at M1 = 53.8%

Maximum value of SAR (measured) = 1.24 W/kg

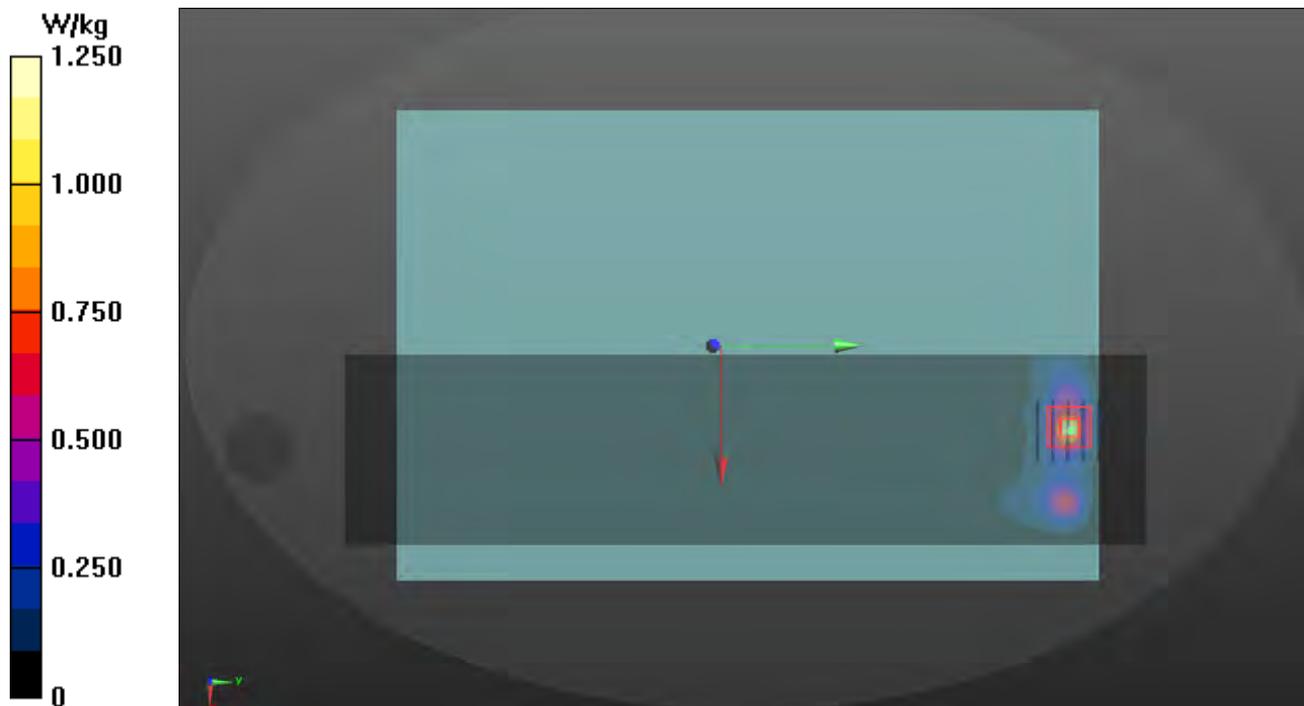

Plots of System Verification

Test Laboratory: Bureau Veritas ADT SAR/HAC Testing Lab

Date: 2022/03/30

P05 LTE 4_QPSK20M_Rear Face_0mm_Ch20175_1RB_OS0_Ant 0_w

DUT: BFLF-WTW-P22030374

Communication System: UID 10169 - CAE, LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK); Frequency: 1732.5 MHz; Duty Cycle: 1:3.74

Medium: H16T20N1_0330 Medium parameters used (interpolated): $f = 1732.5$ MHz; $\sigma = 1.362$ S/m; $\epsilon_r = 39.076$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 23.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3820; ConvF(7.66, 7.66, 7.66) @ 1732.5 MHz; Calibrated: 2021/07/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1431; Calibrated: 2022/02/23
- Phantom: ELI Phantom_1206; Type: QDOVA001BB;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (71x281x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.08 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 28.69 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 1.49 W/kg

SAR(1 g) = 0.601 W/kg; SAR(10 g) = 0.269 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 9.4 mm

Ratio of SAR at M2 to SAR at M1 = 50.2%

Maximum value of SAR (measured) = 1.17 W/kg

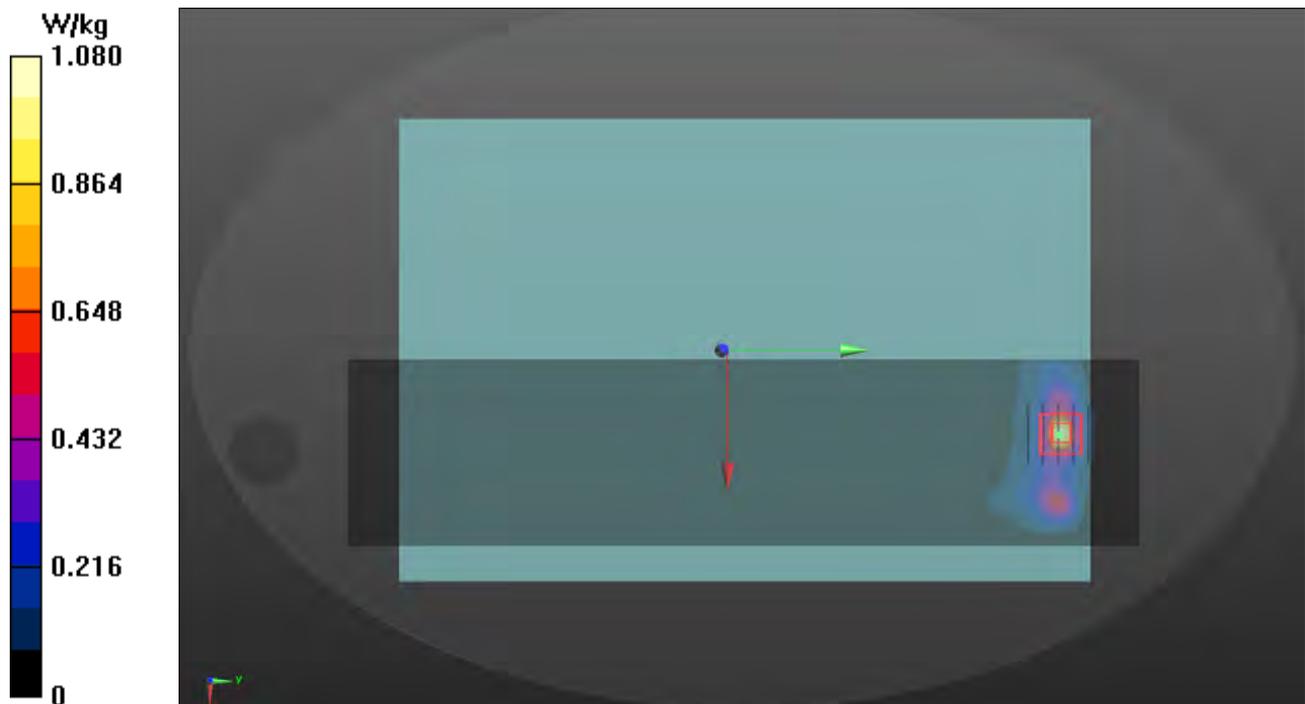

Plots of System Verification

Test Laboratory: Bureau Veritas ADT SAR/HAC Testing Lab

Date: 2022/03/30

P06 LTE 5_QPSK10M_Rear Face_0mm_Ch20450_1RB_OS0_Ant 0_w

DUT: BFLF-WTW-P22030374

Communication System: UID 10175 - CAG, LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK); Frequency: 829 MHz; Duty Cycle: 1:3.74
Medium: H07T10N1_0330 Medium parameters used: $f = 829$ MHz; $\sigma = 0.87$ S/m; $\epsilon_r = 45.075$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.5 °C ; Liquid Temperature : 23.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3820; ConvF(9.09, 9.09, 9.09) @ 829 MHz; Calibrated: 2021/07/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1431; Calibrated: 2022/02/23
- Phantom: ELI Phantom_1206; Type: QDOVA001BB;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (71x281x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.945 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 33.93 V/m; Power Drift = -0.05 dB


Peak SAR (extrapolated) = 1.26 W/kg

SAR(1 g) = 0.584 W/kg; SAR(10 g) = 0.309 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 9.7 mm

Ratio of SAR at M2 to SAR at M1 = 58.3%

Maximum value of SAR (measured) = 0.888 W/kg

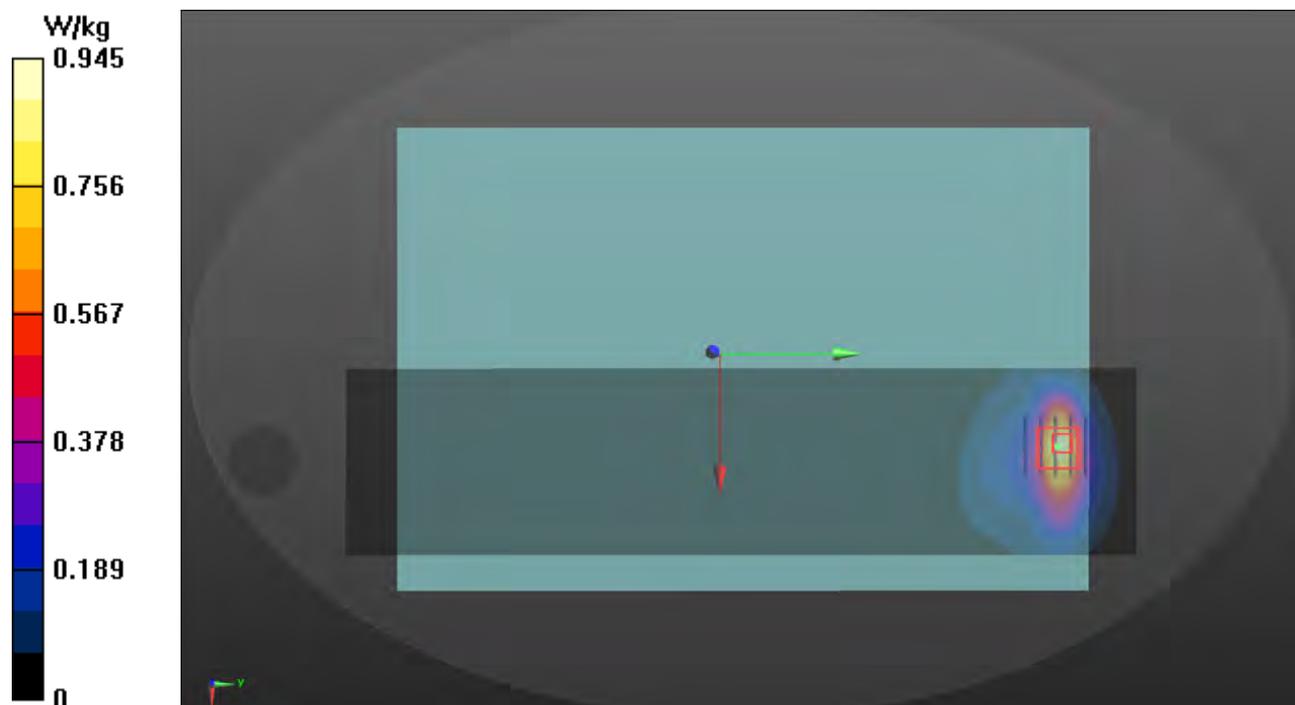

Plots of System Verification

Test Laboratory: Bureau Veritas ADT SAR/HAC Testing Lab

Date: 2022/03/29

P07 LTE 7_QPSK20M_Rear Face_0mm_Ch21350_1RB_OS0_Ant 0_w

DUT: BFLF-WTW-P22030374

Communication System: UID 10169 - CAE, LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK); Frequency: 2560 MHz; Duty Cycle: 1:3.74

Medium: H19T27N1_0329 Medium parameters used: $f = 2560$ MHz; $\sigma = 1.866$ S/m; $\epsilon_r = 38.457$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 23.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3820; ConvF(6.7, 6.7, 6.7) @ 2560 MHz; Calibrated: 2021/07/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1431; Calibrated: 2022/02/23
- Phantom: ELI Phantom_1206; Type: QDOVA001BB;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (91x351x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.12 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 25.83 V/m; Power Drift = 0.09 dB


Peak SAR (extrapolated) = 1.80 W/kg

SAR(1 g) = 0.655 W/kg; SAR(10 g) = 0.24 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 5.6 mm

Ratio of SAR at M2 to SAR at M1 = 50.6%

Maximum value of SAR (measured) = 1.19 W/kg

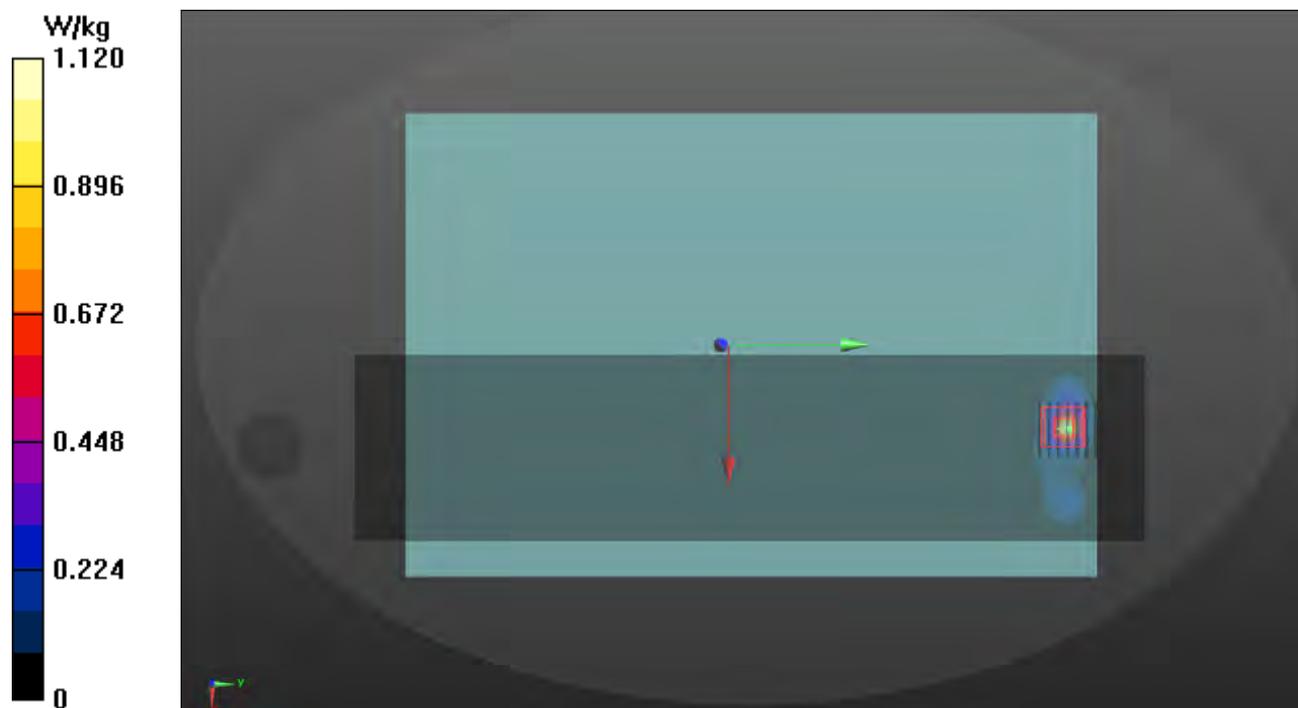

Plots of System Verification

Test Laboratory: Bureau Veritas ADT SAR/HAC Testing Lab

Date: 2022/03/28

P08 LTE 12_QPSK10M_Rear Face_0mm_Ch23095_1RB_OS0_Ant 0_w

DUT: BFLF-WTW-P22030374

Communication System: UID 10175 - CAG, LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK); Frequency: 707.5 MHz; Duty Cycle: 1:3.74

Medium: H06T09N1_0328 Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.907$ S/m; $\epsilon_r = 42.416$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.7 °C ; Liquid Temperature : 23.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7554; ConvF(10.38, 10.38, 10.38) @ 707.5 MHz; Calibrated: 2021/08/26

- Sensor-Surface: 1.4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn1589; Calibrated: 2021/08/20

- Phantom: ELI Phantom_2105; Type: QD OVA 004 Ax;

- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (81x301x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.297 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.82 V/m; Power Drift = -0.08 dB


Peak SAR (extrapolated) = 0.654 W/kg

SAR(1 g) = 0.294 W/kg; SAR(10 g) = 0.151 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8.6 mm

Ratio of SAR at M2 to SAR at M1 = 45.5%

Maximum value of SAR (measured) = 0.506 W/kg

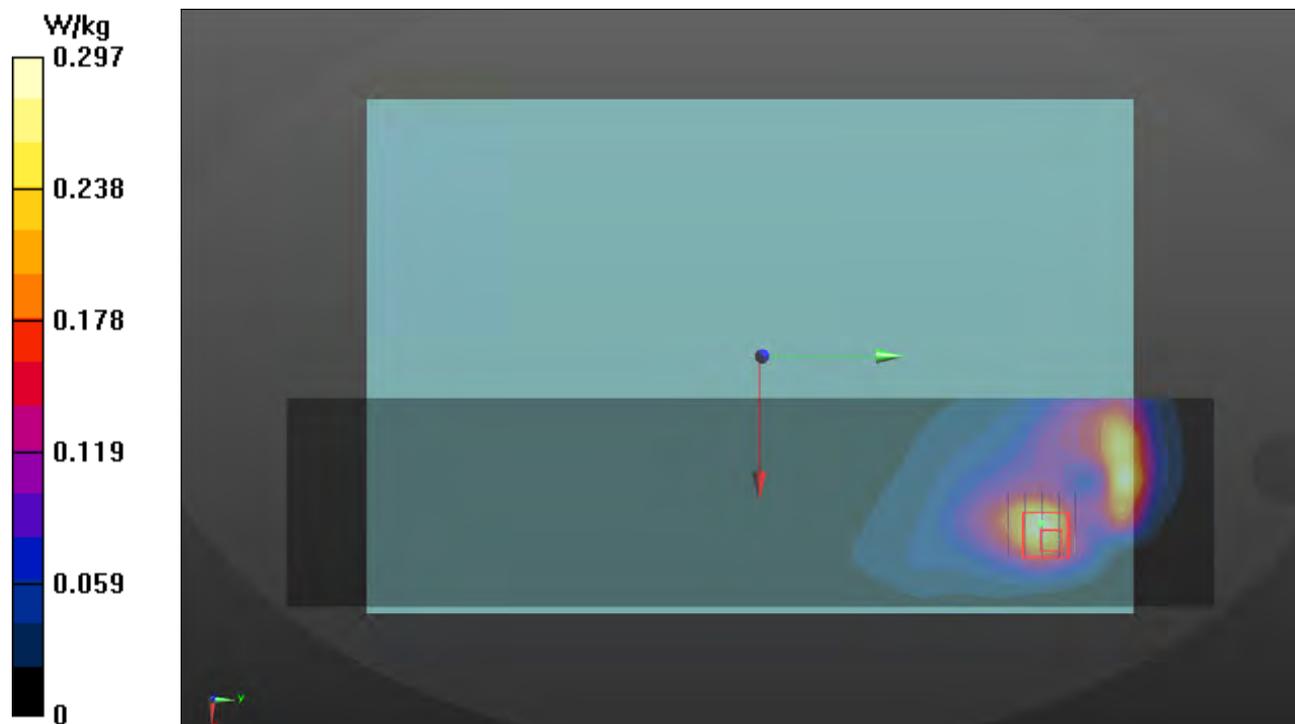

Plots of System Verification

Test Laboratory: Bureau Veritas ADT SAR/HAC Testing Lab

Date: 2022/03/23

P09 LTE 13_QPSK10M_Bottom for Laptop_0mm_Ch23230_1RB_OS0_Ant 0_w

DUT: BFLF-WTW-P22030374

Communication System: UID 10175 - CAG, LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK); Frequency: 782 MHz; Duty Cycle: 1:3.74

Medium: H06T09N1_0323 Medium parameters used: $f = 782$ MHz; $\sigma = 0.931$ S/m; $\epsilon_r = 42.287$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 23.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3820; ConvF(9.62, 9.62, 9.62) @ 782 MHz; Calibrated: 2021/07/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1431; Calibrated: 2022/02/23
- Phantom: ELI Phantom_1206; Type: QDOVA001BB;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (81x281x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.880 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 31.03 V/m; Power Drift = 0.16 dB


Peak SAR (extrapolated) = 1.06 W/kg

SAR(1 g) = 0.611 W/kg; SAR(10 g) = 0.365 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 15.8 mm

Ratio of SAR at M2 to SAR at M1 = 54.2%

Maximum value of SAR (measured) = 0.865 W/kg

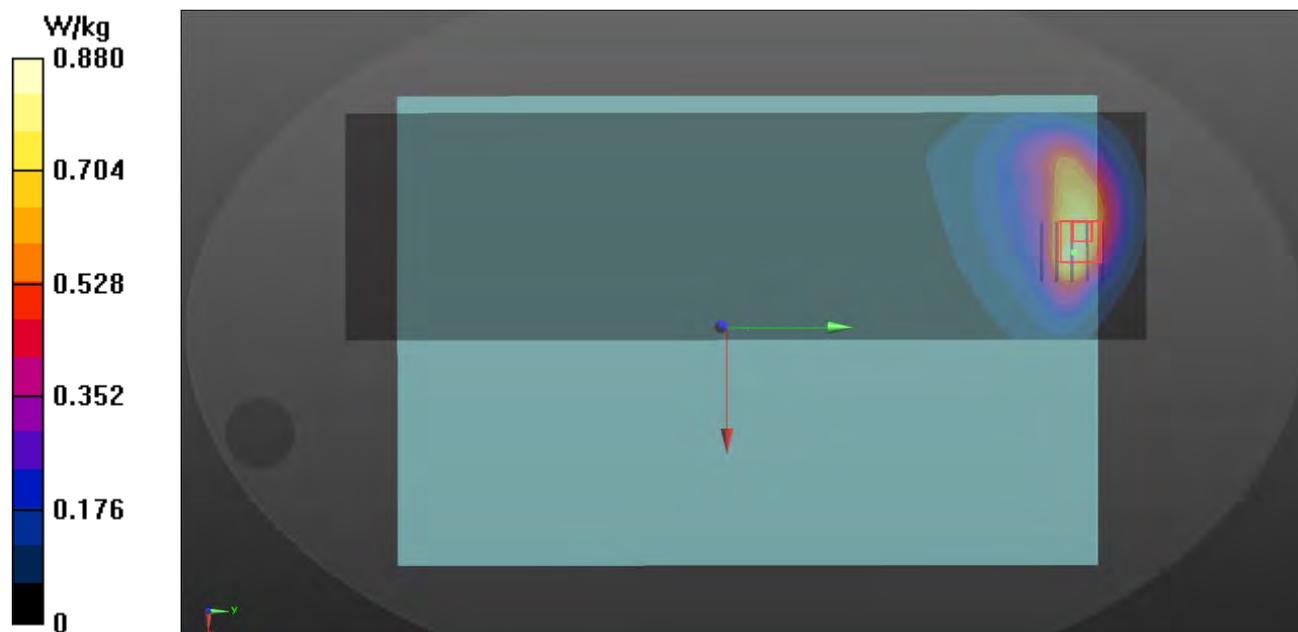

Plots of System Verification

Test Laboratory: Bureau Veritas ADT SAR/HAC Testing Lab

Date: 2022/03/23

P10 LTE 14_QPSK10M_Bottom for Laptop_0mm_Ch23330_1RB_OS0_Ant 0_w

DUT: BFLF-WTW-P22030374

Communication System: UID 10175 - CAG, LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK); Frequency: 793 MHz; Duty Cycle: 1:3.74

Medium: H06T09N1_0323 Medium parameters used: $f = 793$ MHz; $\sigma = 0.938$ S/m; $\epsilon_r = 42.201$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 23.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3820; ConvF(9.62, 9.62, 9.62) @ 793 MHz; Calibrated: 2021/07/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1431; Calibrated: 2022/02/23
- Phantom: ELI Phantom_1206; Type: QDOVA001BB;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (81x281x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.847 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 30.49 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 1.03 W/kg

SAR(1 g) = 0.583 W/kg; SAR(10 g) = 0.348 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 15.8 mm

Ratio of SAR at M2 to SAR at M1 = 53.7%

Maximum value of SAR (measured) = 0.844 W/kg

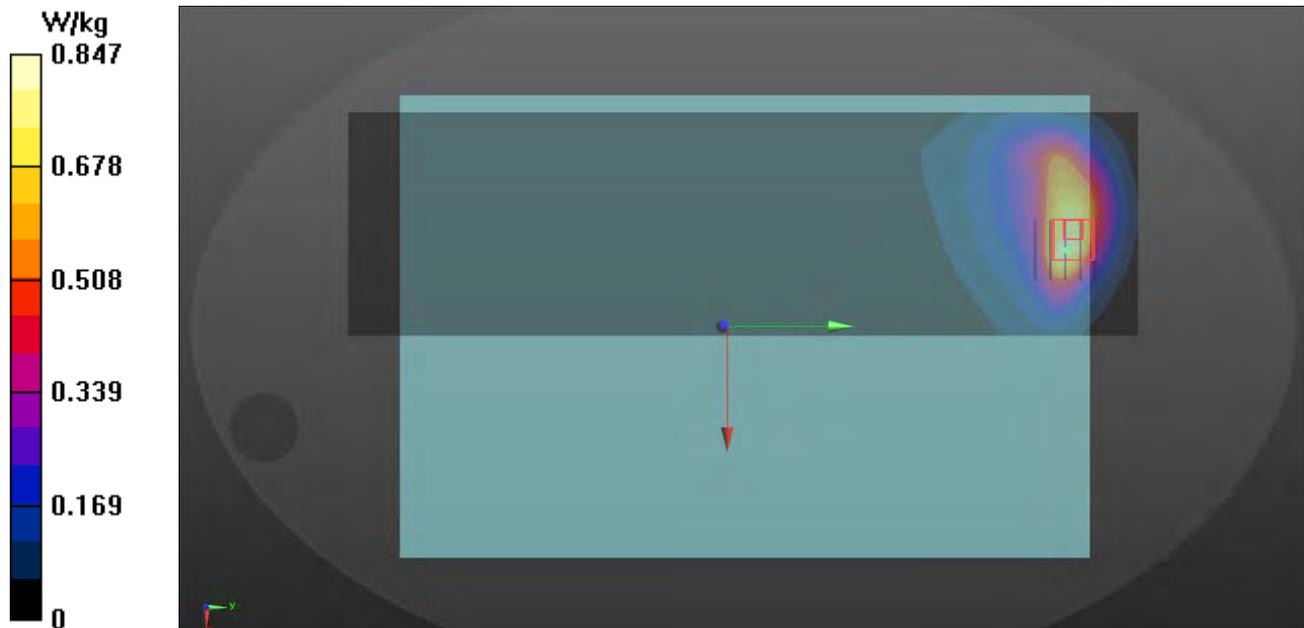

Plots of System Verification

Test Laboratory: Bureau Veritas ADT SAR/HAC Testing Lab

Date: 2022/03/31

P11 LTE 17_QPSK10M_Rear Face_0mm_Ch23800_1RB_OS0_Ant 0_w

DUT: BFLF-WTW-P22030374

Communication System: UID 10175 - CAG, LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK); Frequency: 711 MHz; Duty Cycle: 1:3.74

Medium: H06T09N1_0331 Medium parameters used: $f = 711$ MHz; $\sigma = 0.881$ S/m; $\epsilon_r = 40.76$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C ; Liquid Temperature : 23.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3820; ConvF(9.62, 9.62, 9.62) @ 711 MHz; Calibrated: 2021/07/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1431; Calibrated: 2022/02/23
- Phantom: ELI Phantom_1206; Type: QDOVA001BB;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (71x281x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.869 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 32.61 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 1.53 W/kg

SAR(1 g) = 0.661 W/kg; SAR(10 g) = 0.338 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 9.2 mm

Ratio of SAR at M2 to SAR at M1 = 53.4%

Maximum value of SAR (measured) = 1.14 W/kg

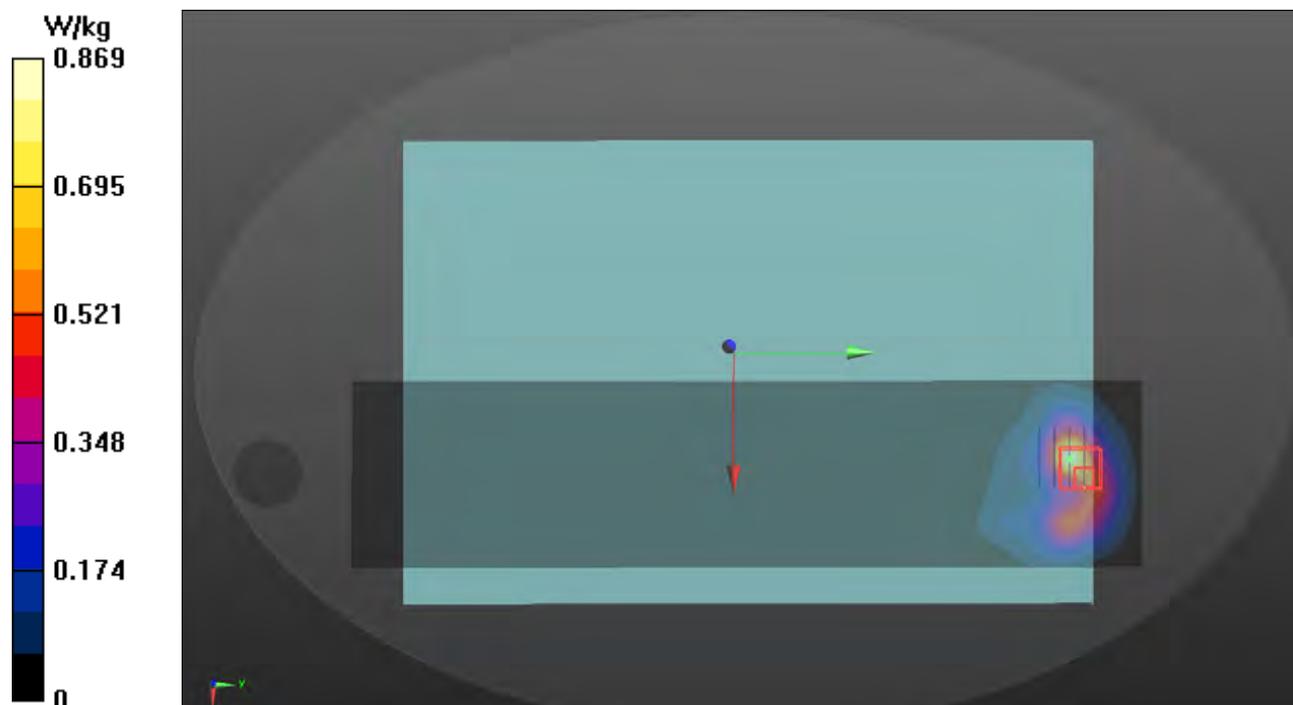

Plots of System Verification

Test Laboratory: Bureau Veritas ADT SAR/HAC Testing Lab

Date: 2022/04/01

P12 LTE 25_QPSK20M_Rear Face_0mm_Ch26365_1RB_OS0_Ant 0_w

DUT: BFLF-WTW-P22030374

Communication System: UID 10169 - CAE, LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK); Frequency: 1882.5 MHz; Duty Cycle: 1:3.74

Medium: H16T20N1_0401 Medium parameters used (interpolated): $f = 1882.5$ MHz; $\sigma = 1.453$ S/m; $\epsilon_r = 38.846$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 23.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3820; ConvF(7.35, 7.35, 7.35) @ 1882.5 MHz; Calibrated: 2021/07/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1431; Calibrated: 2022/02/23
- Phantom: ELI Phantom_1206; Type: QDOVA001BB;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (71x281x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.33 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 31.56 V/m; Power Drift = -0.12 dB



Peak SAR (extrapolated) = 1.71 W/kg

SAR(1 g) = 0.667 W/kg; SAR(10 g) = 0.289 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 9.8 mm

Ratio of SAR at M2 to SAR at M1 = 51.1%

Maximum value of SAR (measured) = 1.34 W/kg

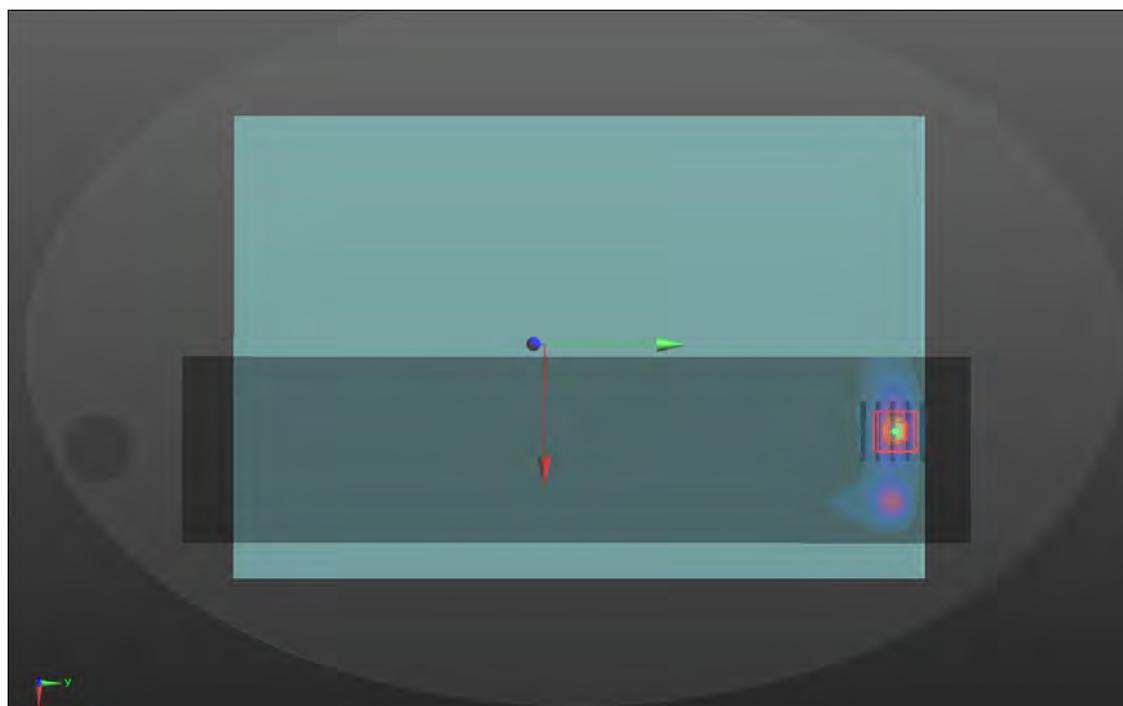

Plots of System Verification

Test Laboratory: Bureau Veritas ADT SAR/HAC Testing Lab

Date: 2022/04/01

P13 LTE 26_QPSK15M_Rear Face_0mm_Ch26865_1RB_OS0_Ant 0_w

DUT: BFLF-WTW-P22030374

Communication System: UID 10181 - CAE, LTE-FDD (SC-FDMA, 1 RB, 15 MHz, QPSK); Frequency: 831.5 MHz; Duty Cycle: 1:3.74

Medium: H07T10N1_0401 Medium parameters used (interpolated): $f = 831.5$ MHz; $\sigma = 0.928$ S/m; $\epsilon_r = 40.58$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 23.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3820; ConvF(9.09, 9.09, 9.09) @ 831.5 MHz; Calibrated: 2021/07/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1431; Calibrated: 2022/02/23
- Phantom: ELI Phantom_1206; Type: QDOVA001BB;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (71x281x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.00 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 34.09 V/m; Power Drift = 0.15 dB


Peak SAR (extrapolated) = 1.33 W/kg

SAR(1 g) = 0.581 W/kg; SAR(10 g) = 0.313 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 9.3 mm

Ratio of SAR at M2 to SAR at M1 = 57.4%

Maximum value of SAR (measured) = 0.980 W/kg

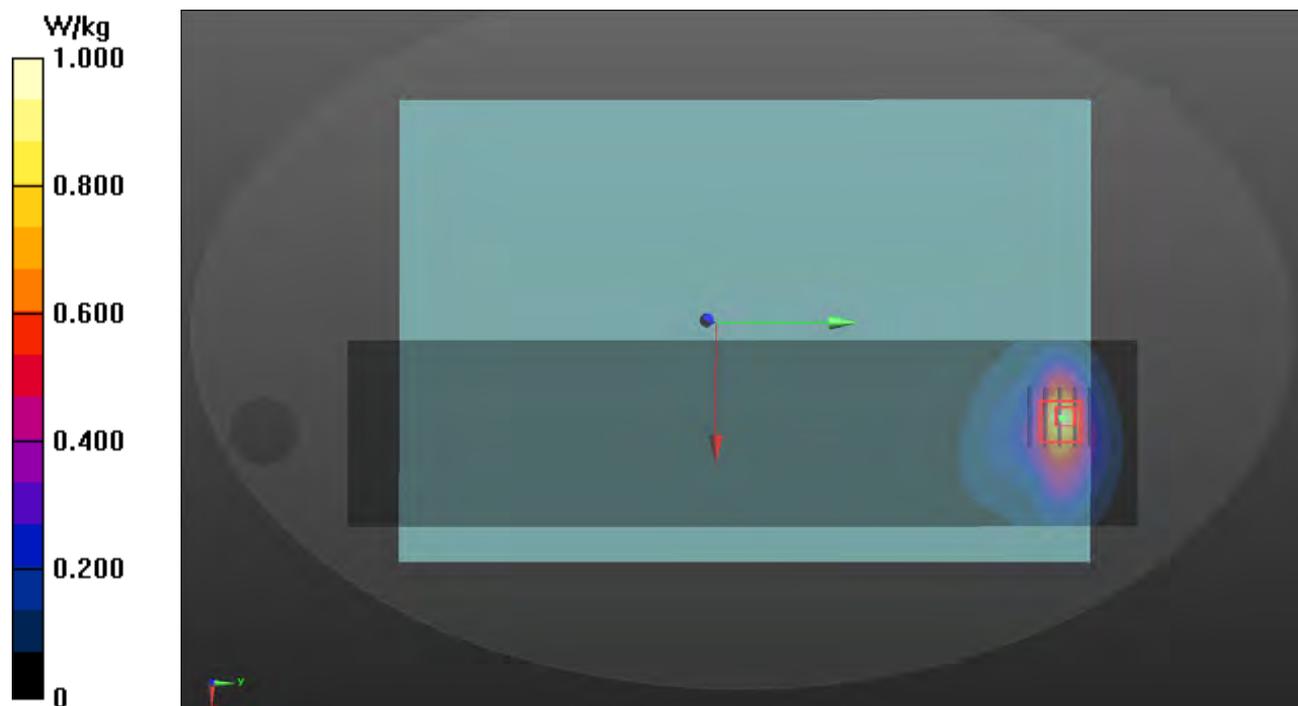

Plots of System Verification

Test Laboratory: Bureau Veritas ADT SAR/HAC Testing Lab

Date: 2022/03/29

P14 LTE 30_QPSK10M_Rear Face_0mm_Ch27710_1RB_OS0_Ant 0_w

DUT: BFLF-WTW-P22030374

Communication System: UID 10175 - CAG, LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK); Frequency: 2310 MHz; Duty Cycle: 1:3.74

Medium: H19T27N1_0329 Medium parameters used: $f = 2310$ MHz; $\sigma = 1.726$ S/m; $\epsilon_r = 38.428$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.7 °C ; Liquid Temperature : 23.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7554; ConvF(7.68, 7.68, 7.68) @ 2310 MHz; Calibrated: 2021/08/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1589; Calibrated: 2021/08/20
- Phantom: ELI Phantom_2105; Type: QD OVA 004 Ax;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (91x371x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.663 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 19.78 V/m; Power Drift = -0.11 dB


Peak SAR (extrapolated) = 2.01 W/kg

SAR(1 g) = 0.685 W/kg; SAR(10 g) = 0.251 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 5.4 mm

Ratio of SAR at M2 to SAR at M1 = 37.6%

Maximum value of SAR (measured) = 1.50 W/kg

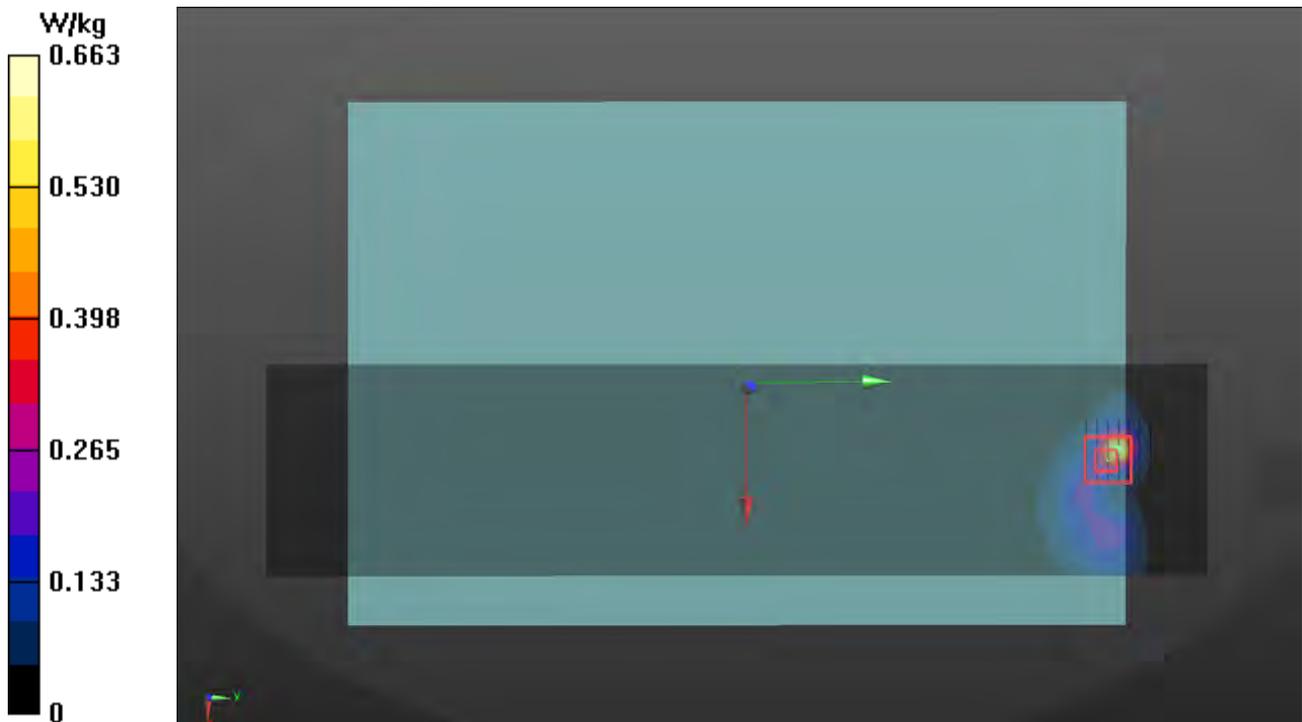

Plots of System Verification

Test Laboratory: Bureau Veritas ADT SAR/HAC Testing Lab

Date: 2022/04/01

P15 LTE 38_QPSK20M_Rear Face_0mm_Ch38150_1RB_OS0_Ant 0_w

DUT: BFLF-WTW-P22030374

Communication System: UID 10172 - CAG, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK); Frequency: 2610 MHz; Duty Cycle: 1:8.33

Medium: H19T27N1_0401 Medium parameters used: $f = 2610$ MHz; $\sigma = 1.908$ S/m; $\epsilon_r = 38.485$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 23.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3820; ConvF(6.7, 6.7, 6.7) @ 2610 MHz; Calibrated: 2021/07/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1431; Calibrated: 2022/02/23
- Phantom: ELI Phantom_1206; Type: QDOVA001BB;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (91x351x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.46 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 29.23 V/m; Power Drift = -0.03 dB


Peak SAR (extrapolated) = 1.61 W/kg

SAR(1 g) = 0.582 W/kg; SAR(10 g) = 0.208 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 9.4 mm

Ratio of SAR at M2 to SAR at M1 = 58.5%

Maximum value of SAR (measured) = 1.17 W/kg

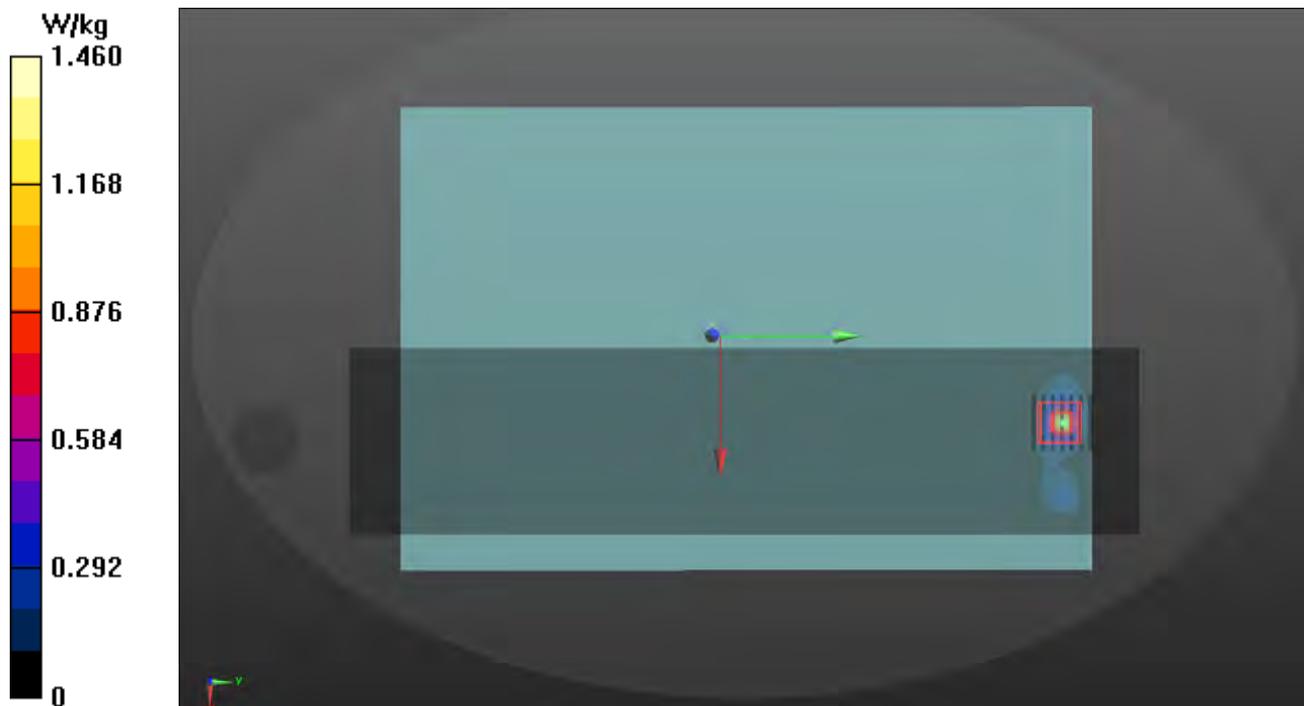

Plots of System Verification

Test Laboratory: Bureau Veritas ADT SAR/HAC Testing Lab

Date: 2022/03/29

P16 LTE 40_QPSK20M_Rear Face_0mm_Ch39550_1RB_OS0_Ant 0_w

DUT: BFLF-WTW-P22030374

Communication System: UID 10172 - CAG, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK); Frequency: 2390 MHz; Duty Cycle: 1:8.33

Medium: H19T27N1_0329 Medium parameters used: $f = 2390$ MHz; $\sigma = 1.808$ S/m; $\epsilon_r = 38.173$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.7 °C ; Liquid Temperature : 23.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7554; ConvF(7.68, 7.68, 7.68) @ 2390 MHz; Calibrated: 2021/08/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1589; Calibrated: 2021/08/20
- Phantom: ELI Phantom_2105; Type: QD OVA 004 Ax;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (91x371x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.602 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 18.30 V/m; Power Drift = -0.09 dB


Peak SAR (extrapolated) = 1.87 W/kg

SAR(1 g) = 0.644 W/kg; SAR(10 g) = 0.228 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 5.4 mm

Ratio of SAR at M2 to SAR at M1 = 37.5%

Maximum value of SAR (measured) = 1.39 W/kg

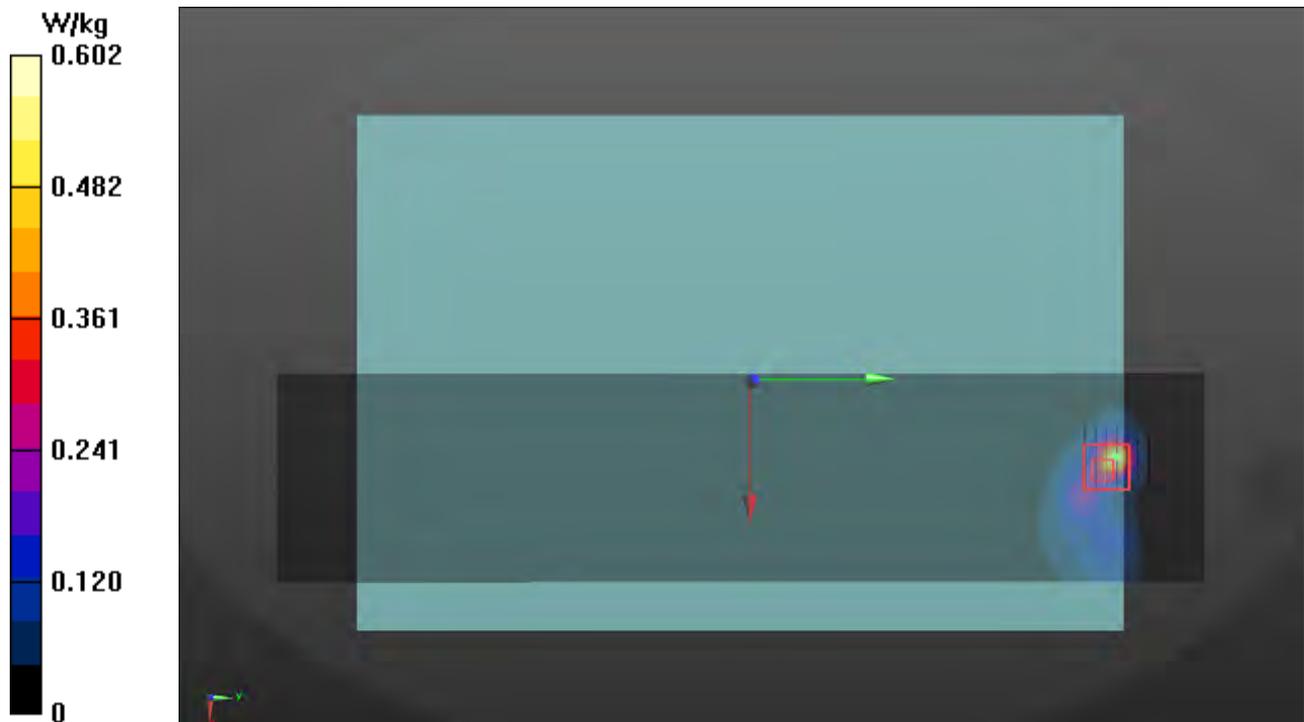

Plots of System Verification

Test Laboratory: Bureau Veritas ADT SAR/HAC Testing Lab

Date: 2022/03/22

P17 LTE 41_QPSK20M_Rear Face_0mm_Ch40620_1RB_OS0_Ant 2_w

DUT: BFLF-WTW-P22030374

Communication System: UID 10172 - CAG, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK); Frequency: 2593 MHz; Duty Cycle: 1:8.33

Medium: H19T27N1_0322 Medium parameters used (interpolated): $f = 2593$ MHz; $\sigma = 2.022$ S/m; $\epsilon_r = 37.473$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 23.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7554; ConvF(7.3, 7.3, 7.3) @ 2593 MHz; Calibrated: 2021/08/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1589; Calibrated: 2021/08/20
- Phantom: ELI Phantom_2105; Type: QD OVA 004 Ax;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (91x371x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.220 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.25 V/m; Power Drift = -0.08 dB


Peak SAR (extrapolated) = 0.447 W/kg

SAR(1 g) = 0.315 W/kg; SAR(10 g) = 0.069 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 6.3 mm

Ratio of SAR at M2 to SAR at M1 = 37.9%

Maximum value of SAR (measured) = 0.324 W/kg

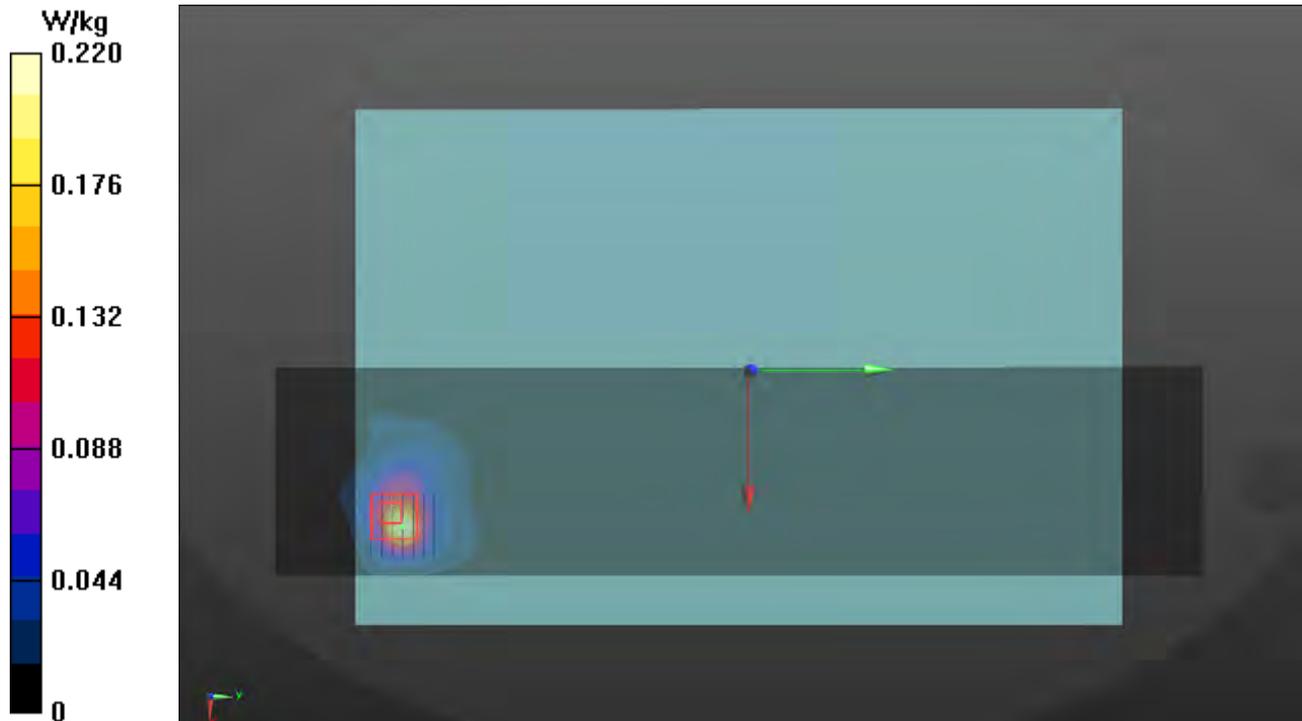

Plots of System Verification

Test Laboratory: Bureau Veritas ADT SAR/HAC Testing Lab

Date: 2022/03/27

P20 LTE 48_QPSK20M_Rear Face_0mm_Ch55340_1RB_OS0_Ant 2_w

DUT: BFLF-WTW-P22030374

Communication System: UID 10172 - CAG, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK); Frequency: 3560 MHz; Duty Cycle: 1:8.3

Medium: H33T42N1_0327 Medium parameters used: $f = 3560$ MHz; $\sigma = 2.974$ S/m; $\epsilon_r = 37.192$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 23.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3820; ConvF(6.66, 6.66, 6.66) @ 3560 MHz; Calibrated: 2021/07/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1431; Calibrated: 2022/02/23
- Phantom: ELI Phantom_1206; Type: QDOVA001BB;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (91x371x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.785 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=2.5mm

Reference Value = 16.60 V/m; Power Drift = 0.05 dB


Peak SAR (extrapolated) = 1.57 W/kg

SAR(1 g) = 0.437 W/kg; SAR(10 g) = 0.129 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 5.4 mm

Ratio of SAR at M2 to SAR at M1 = 58.1%

Maximum value of SAR (measured) = 0.897 W/kg

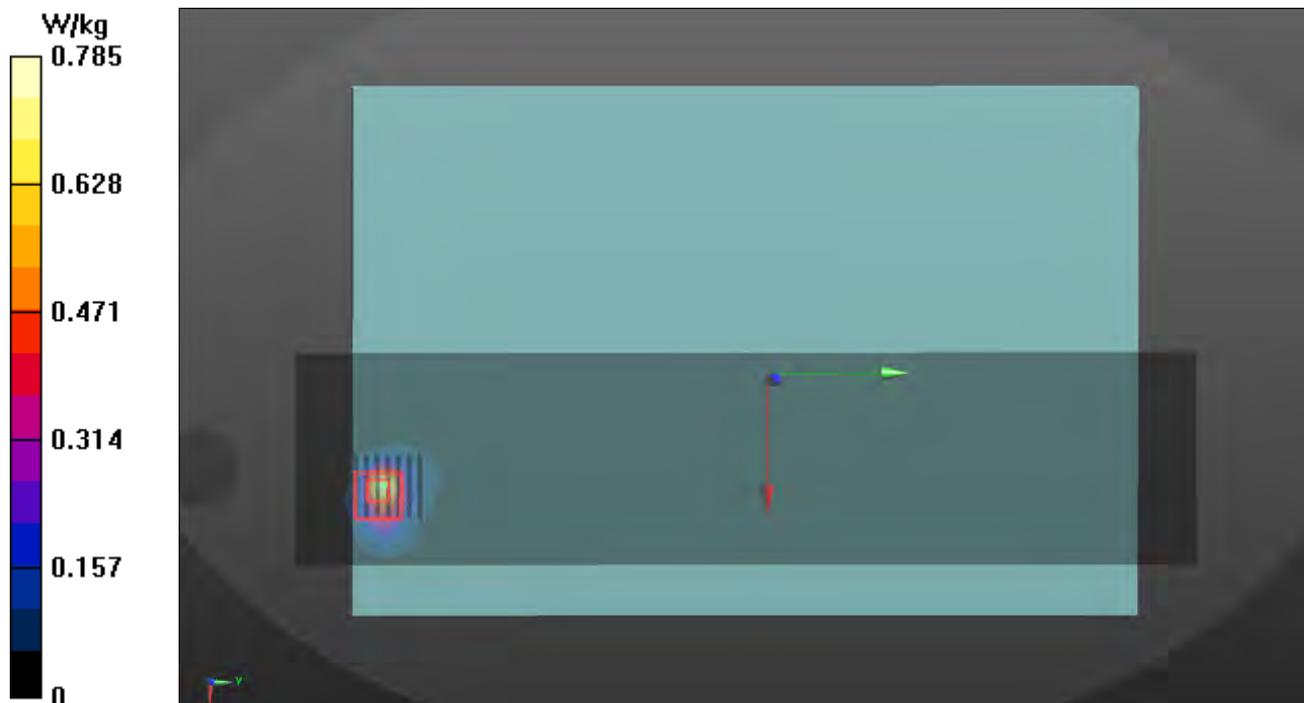

Plots of System Verification

Test Laboratory: Bureau Veritas ADT SAR/HAC Testing Lab

Date: 2022/03/26

P21 LTE 66_QPSK20M_Rear Face_0mm_Ch132572_1RB_OS0_Ant 0_w

DUT: BFLF-WTW-P22030374

Communication System: UID 10169 - CAE, LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK); Frequency: 1770 MHz; Duty Cycle: 1:3.74

Medium: H16T20N1_0326 Medium parameters used: $f = 1770$ MHz; $\sigma = 1.378$ S/m; $\epsilon_r = 38.798$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 23.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7554; ConvF(8.54, 8.54, 8.54) @ 1770 MHz; Calibrated: 2021/08/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1589; Calibrated: 2021/08/20
- Phantom: ELI Phantom_2105; Type: QD OVA 004 Ax;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (71x301x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.17 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 29.02 V/m; Power Drift = -0.05 dB


Peak SAR (extrapolated) = 1.60 W/kg

SAR(1 g) = 0.664 W/kg; SAR(10 g) = 0.308 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8.2 mm

Ratio of SAR at M2 to SAR at M1 = 45%

Maximum value of SAR (measured) = 1.20 W/kg

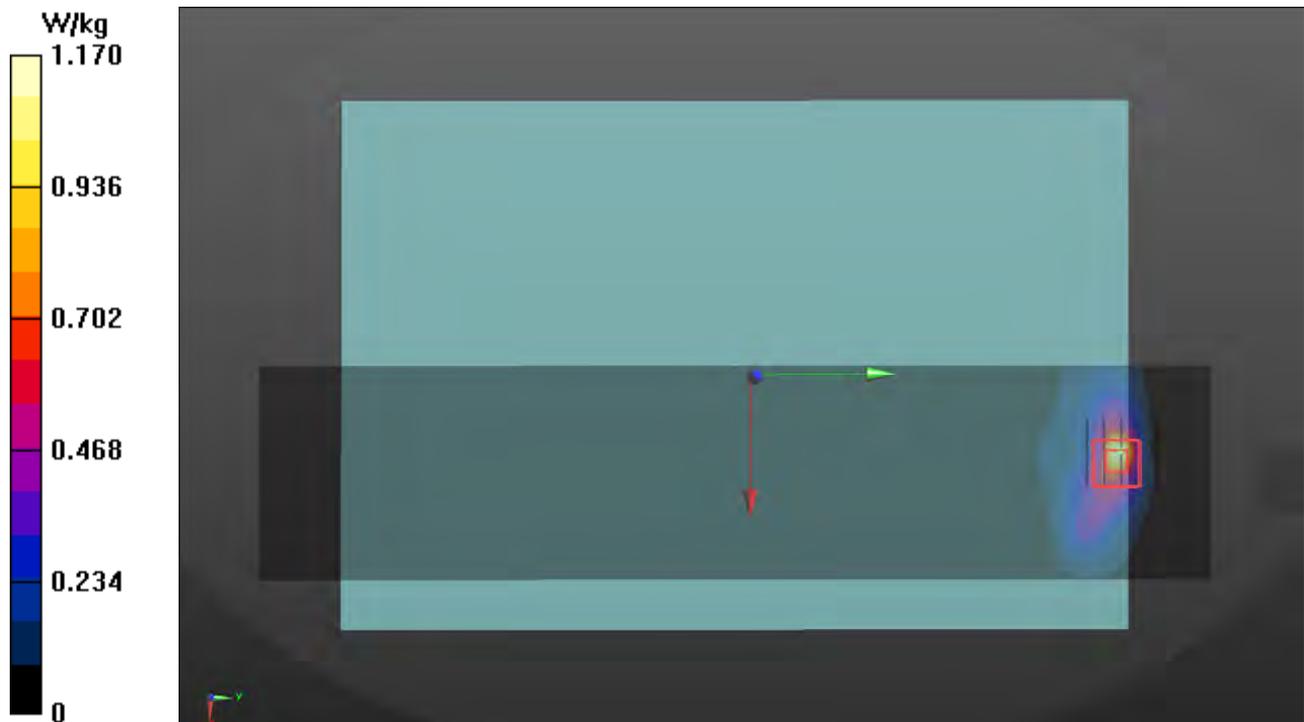

Plots of System Verification

Test Laboratory: Bureau Veritas ADT SAR/HAC Testing Lab

Date: 2022/03/28

P22 LTE 71_QPSK20M_Bottom for Laptop_0mm_Ch133222_1RB_OS0_Ant 0_w

DUT: BFLF-WTW-P22030374

Communication System: UID 10169 - CAE, LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK); Frequency: 673 MHz; Duty Cycle: 1:3.74

Medium: H06T09N1_0328 Medium parameters used: $f = 673$ MHz; $\sigma = 0.873$ S/m; $\epsilon_r = 44.115$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.7 °C ; Liquid Temperature : 23.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7554; ConvF(10.38, 10.38, 10.38) @ 673 MHz; Calibrated: 2021/08/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1589; Calibrated: 2021/08/20
- Phantom: ELI Phantom_2105; Type: QD OVA 004 Ax;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (101x301x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.484 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 23.68 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 0.558 W/kg

SAR(1 g) = 0.284 W/kg; SAR(10 g) = 0.167 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 20.8 mm

Ratio of SAR at M2 to SAR at M1 = 55.4%

Maximum value of SAR (measured) = 0.452 W/kg

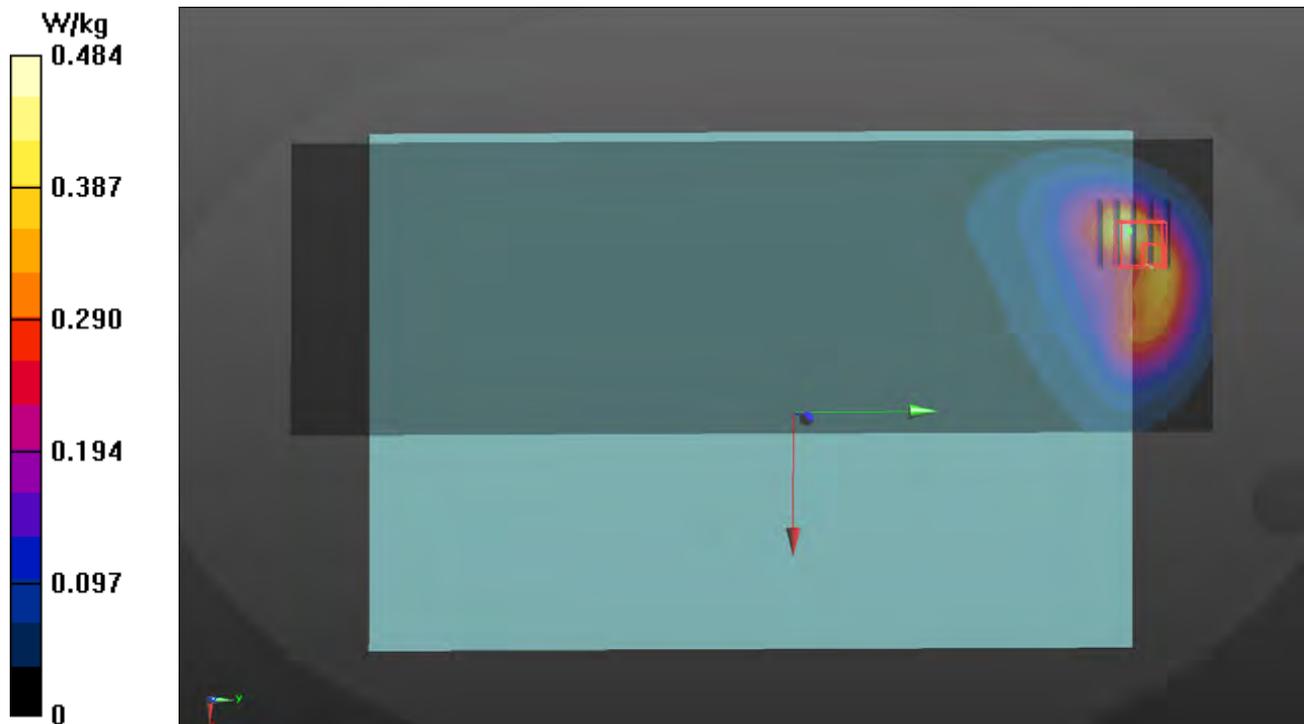

Plots of System Verification

Test Laboratory: Bureau Veritas ADT SAR/HAC Testing Lab

Date: 2022/03/26

P23 5GNR-n2_DFT-S QPSK20M_Rear Face_0mm_Ch376000_1RB_OS1_Ant 0_w

DUT: BFLF-WTW-P22030374

Communication System: UID 10931 - AAC, 5G NR (DFT-s-OFDM, 1 RB, 20 MHz, QPSK, 15 kHz); Frequency: 1880 MHz; Duty Cycle: 1:3.56
Medium: H16T20N1_0326 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.446$ S/m; $\epsilon_r = 38.571$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.5 °C ; Liquid Temperature : 23.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7554; ConvF(8.17, 8.17, 8.17) @ 1880 MHz; Calibrated: 2021/08/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1589; Calibrated: 2021/08/20
- Phantom: ELI Phantom_2105; Type: QD OVA 004 Ax;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (71x401x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.823 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 22.92 V/m; Power Drift = -0.05 dB


Peak SAR (extrapolated) = 1.32 W/kg

SAR(1 g) = 0.582 W/kg; SAR(10 g) = 0.273 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8.2 mm

Ratio of SAR at M2 to SAR at M1 = 45%

Maximum value of SAR (measured) = 1.00 W/kg

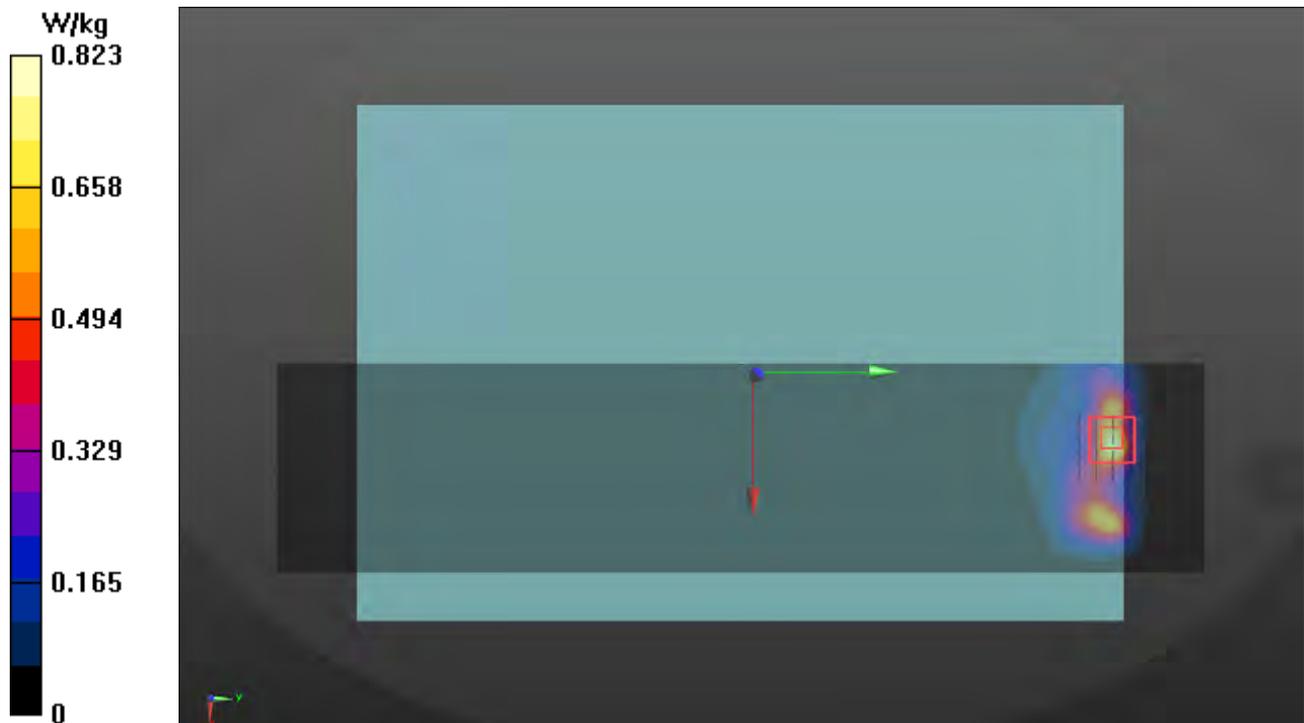

Plots of System Verification

Test Laboratory: Bureau Veritas ADT SAR/HAC Testing Lab

Date: 2022/03/26

P24 5GNR-n5_DFT-S QPSK20M_Rear Face_0mm_Ch167300_1RB_OS1_Ant 0_w

DUT: BFLF-WTW-P22030374

Communication System: UID 10931 - AAC, 5G NR (DFT-s-OFDM, 1 RB, 20 MHz, QPSK, 15 kHz); Frequency: 836.5 MHz; Duty Cycle: 1:3.56

Medium: H07T10N1_0326 Medium parameters used (interpolated): $f = 836.5$ MHz; $\sigma = 0.932$ S/m; $\epsilon_r = 40.562$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 23.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7554; ConvF(9.92, 9.92, 9.92) @ 836.5 MHz; Calibrated: 2021/08/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1589; Calibrated: 2021/08/20
- Phantom: ELI Phantom_2105; Type: QD OVA 004 Ax;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (71x301x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.03 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 34.72 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 1.49 W/kg

SAR(1 g) = 0.606 W/kg; SAR(10 g) = 0.346 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8.6 mm

Ratio of SAR at M2 to SAR at M1 = 41.1%

Maximum value of SAR (measured) = 1.01 W/kg

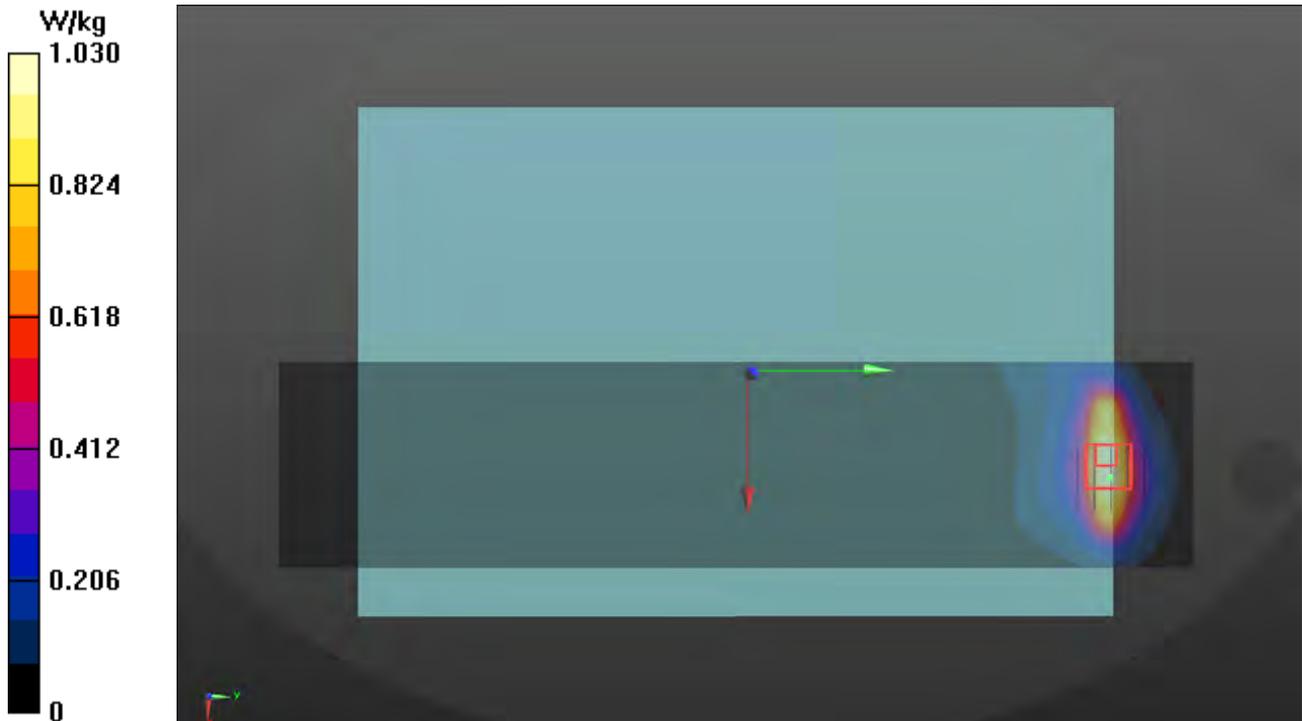

Plots of System Verification

Test Laboratory: Bureau Veritas ADT SAR/HAC Testing Lab

Date: 2022/03/28

P25 5GNR-n7_DFT-S QPSK20M_Rear Face_0mm_Ch507000_1RB_OS1_Ant 0_w

DUT: BFLF-WTW-P22030374

Communication System: UID 10931 - AAB, 5G NR (DFT-s-OFDM, 1 RB, 20 MHz, QPSK, 15 kHz); Frequency: 2535 MHz; Duty Cycle: 1:3.56

Medium: H19T27N1_0328 Medium parameters used (interpolated): $f = 2535$ MHz; $\sigma = 1.954$ S/m; $\epsilon_r = 37.831$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.7 °C ; Liquid Temperature : 23.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7554; ConvF(7.3, 7.3, 7.3) @ 2535 MHz; Calibrated: 2021/08/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1589; Calibrated: 2021/08/20
- Phantom: ELI Phantom_2105; Type: QD OVA 004 Ax;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (91x371x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.362 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.92 V/m; Power Drift = -0.04 dB


Peak SAR (extrapolated) = 1.88 W/kg

SAR(1 g) = 0.617 W/kg; SAR(10 g) = 0.228 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 5.1 mm

Ratio of SAR at M2 to SAR at M1 = 39.1%

Maximum value of SAR (measured) = 1.30 W/kg

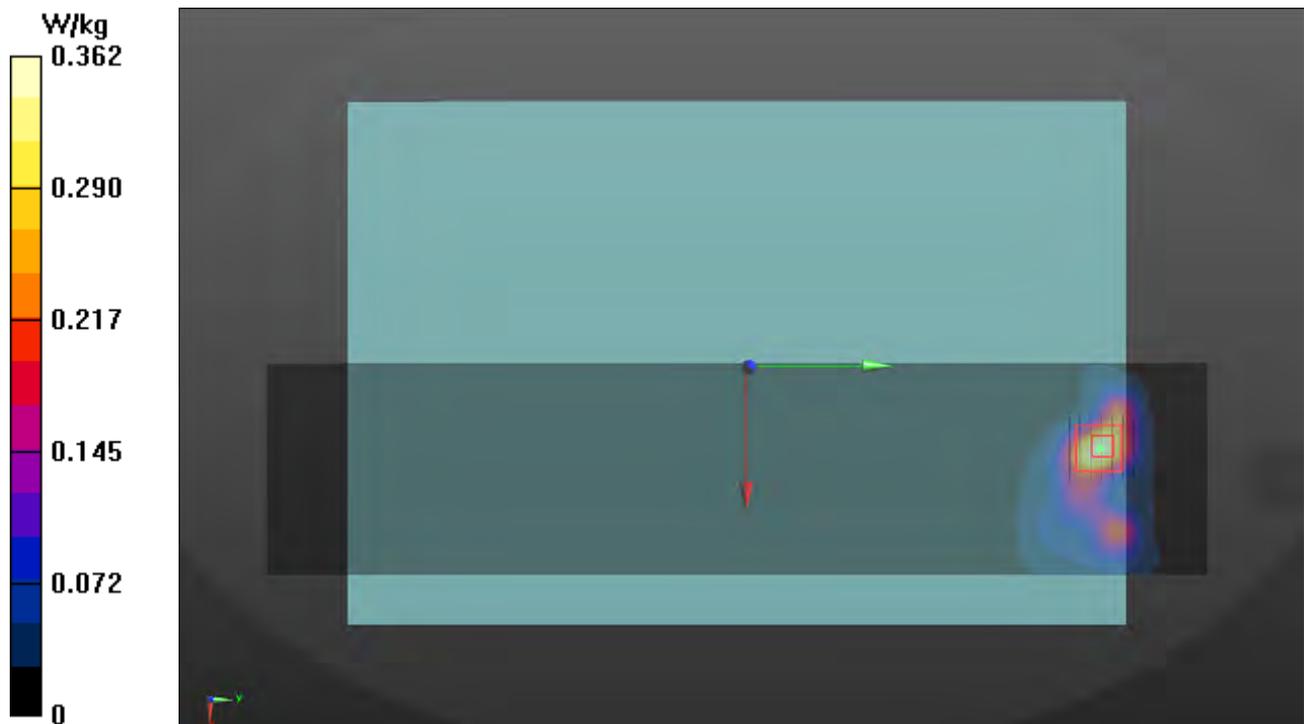

Plots of System Verification

Test Laboratory: Bureau Veritas ADT SAR/HAC Testing Lab

Date: 2022/03/25

P26 5GNR-n25_DFT-S QPSK20M_Bottom for Laptop_0mm_Ch372000_1RB_OS1_Ant 0_w

DUT: BFLF-WTW-P22030374

Communication System: UID 10931 - AAC, 5G NR (DFT-s-OFDM, 1 RB, 20 MHz, QPSK, 15 kHz); Frequency: 1860 MHz; Duty Cycle: 1:3.56

Medium: H16T20N1_0325 Medium parameters used: $f = 1860$ MHz; $\sigma = 1.414$ S/m; $\epsilon_r = 39.219$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C ; Liquid Temperature : 23.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3820; ConvF(7.35, 7.35, 7.35) @ 1860 MHz; Calibrated: 2021/07/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1431; Calibrated: 2022/02/23
- Phantom: ELI Phantom_1206; Type: QDOVA001BB;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (71x281x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 2.21 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 39.08 V/m; Power Drift = -0.03 dB


Peak SAR (extrapolated) = 1.19 W/kg

SAR(1 g) = 0.627 W/kg; SAR(10 g) = 0.333 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 10.7 mm

Ratio of SAR at M2 to SAR at M1 = 55.8%

Maximum value of SAR (measured) = 0.925 W/kg

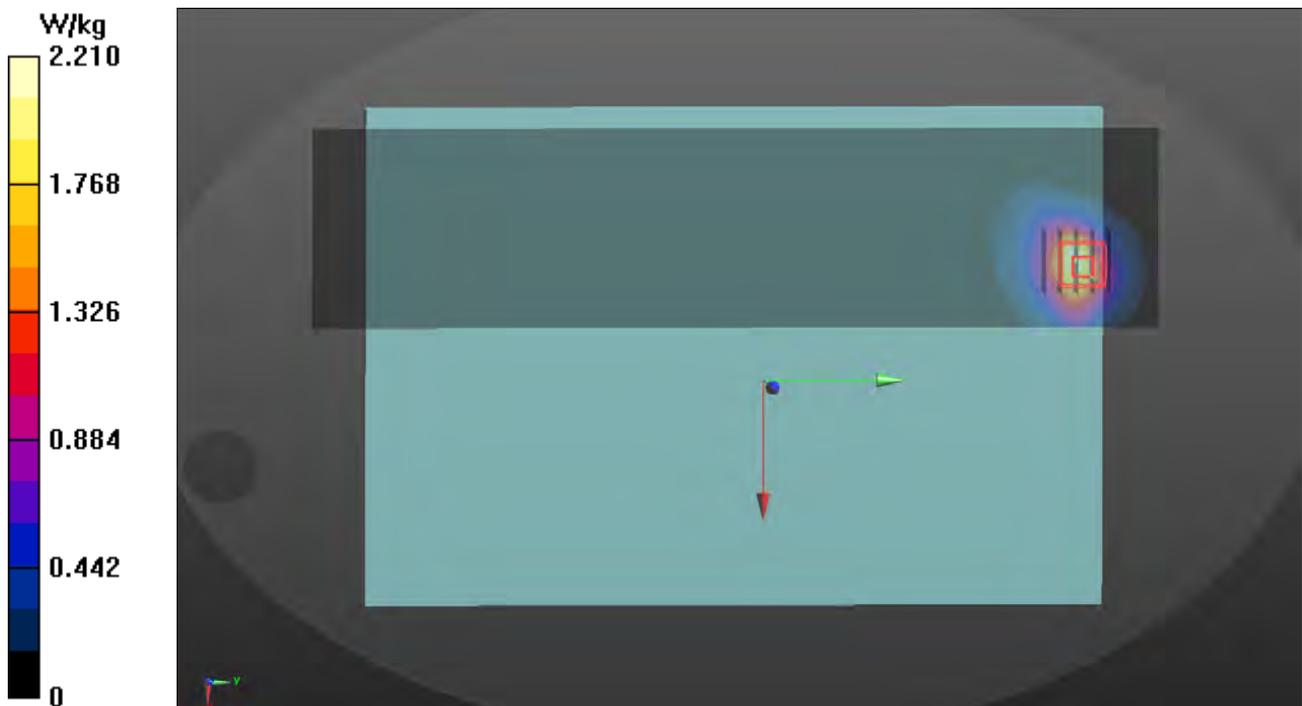

Plots of System Verification

Test Laboratory: Bureau Veritas ADT SAR/HAC Testing Lab

Date: 2022/03/29

P27 5GNR-n30_DFT-S QPSK10M_Rear Face_0mm_Ch462000_1RB_OS1_Ant 0_w

DUT: BFLF-WTW-P22030374

Communication System: UID 10929 - AAC, 5G NR (DFT-s-OFDM, 1 RB, 10 MHz, QPSK, 15 kHz); Frequency: 2310 MHz; Duty Cycle: 1:3.56

Medium: H19T27N1_0329 Medium parameters used: $f = 2310$ MHz; $\sigma = 1.726$ S/m; $\epsilon_r = 38.428$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.7 °C ; Liquid Temperature : 23.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7554; ConvF(7.68, 7.68, 7.68) @ 2310 MHz; Calibrated: 2021/08/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1589; Calibrated: 2021/08/20
- Phantom: ELI Phantom_2105; Type: QD OVA 004 Ax;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (91x371x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.592 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 18.66 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 1.77 W/kg

SAR(1 g) = 0.595 W/kg; SAR(10 g) = 0.213 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 5.4 mm

Ratio of SAR at M2 to SAR at M1 = 37.7%

Maximum value of SAR (measured) = 1.32 W/kg

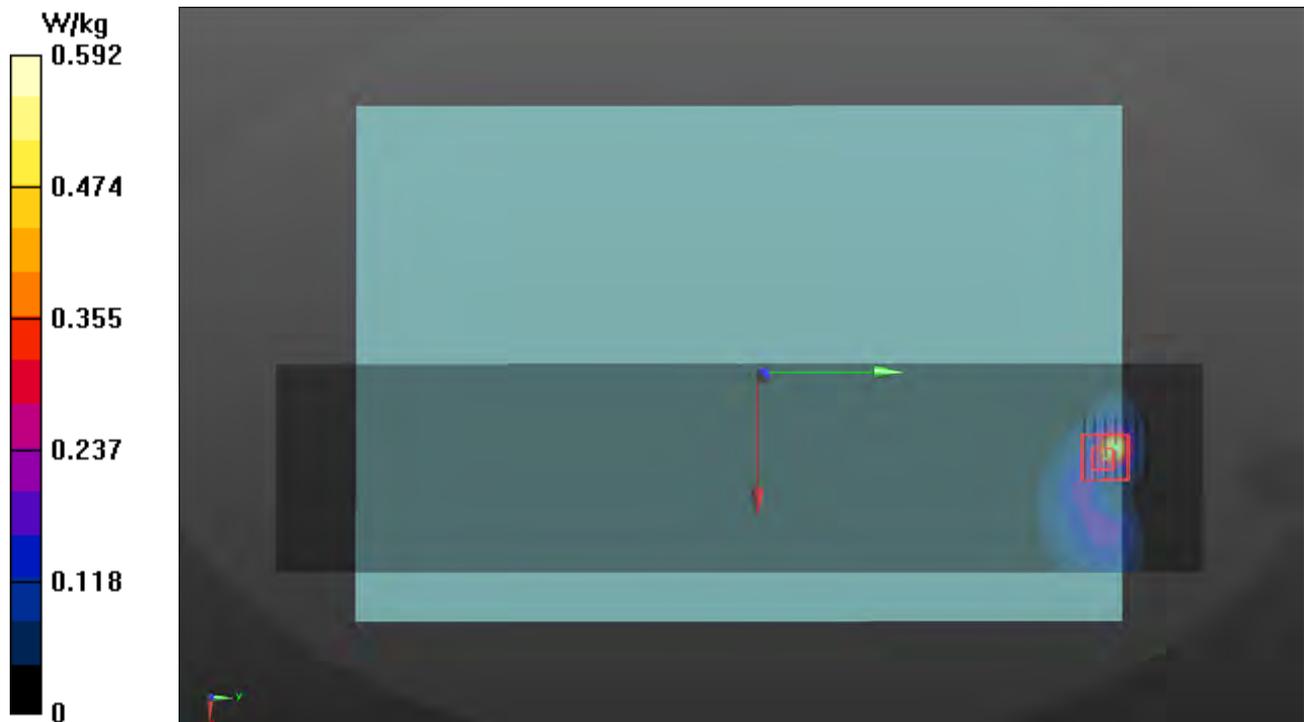

Plots of System Verification

Test Laboratory: Bureau Veritas ADT SAR/HAC Testing Lab

Date: 2022/03/30

P28 5GNR-n38_DFT-S QPSK20M_Rear Face_0mm_Ch519000_1RB_OS1_Ant 0_w

DUT: BFLF-WTW-P22030374

Communication System: UID 10900 - AAB, 5G NR (DFT-s-OFDM, 1 RB, 20 MHz, QPSK, 30 kHz); Frequency: 2595 MHz; Duty Cycle: 1:3.7

Medium: H19T27N0_0330 Medium parameters used (interpolated): $f = 2595$ MHz; $\sigma = 2.043$ S/m; $\epsilon_r = 38.005$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.7 °C ; Liquid Temperature : 23.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7554; ConvF(7.3, 7.3, 7.3) @ 2595 MHz; Calibrated: 2021/08/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1589; Calibrated: 2021/08/20
- Phantom: ELI Phantom_2105; Type: QD OVA 004 Ax;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (91x371x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 2.20 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 32.35 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 1.74 W/kg

SAR(1 g) = 0.564 W/kg; SAR(10 g) = 0.201 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 5.1 mm

Ratio of SAR at M2 to SAR at M1 = 36.6%

Maximum value of SAR (measured) = 1.26 W/kg

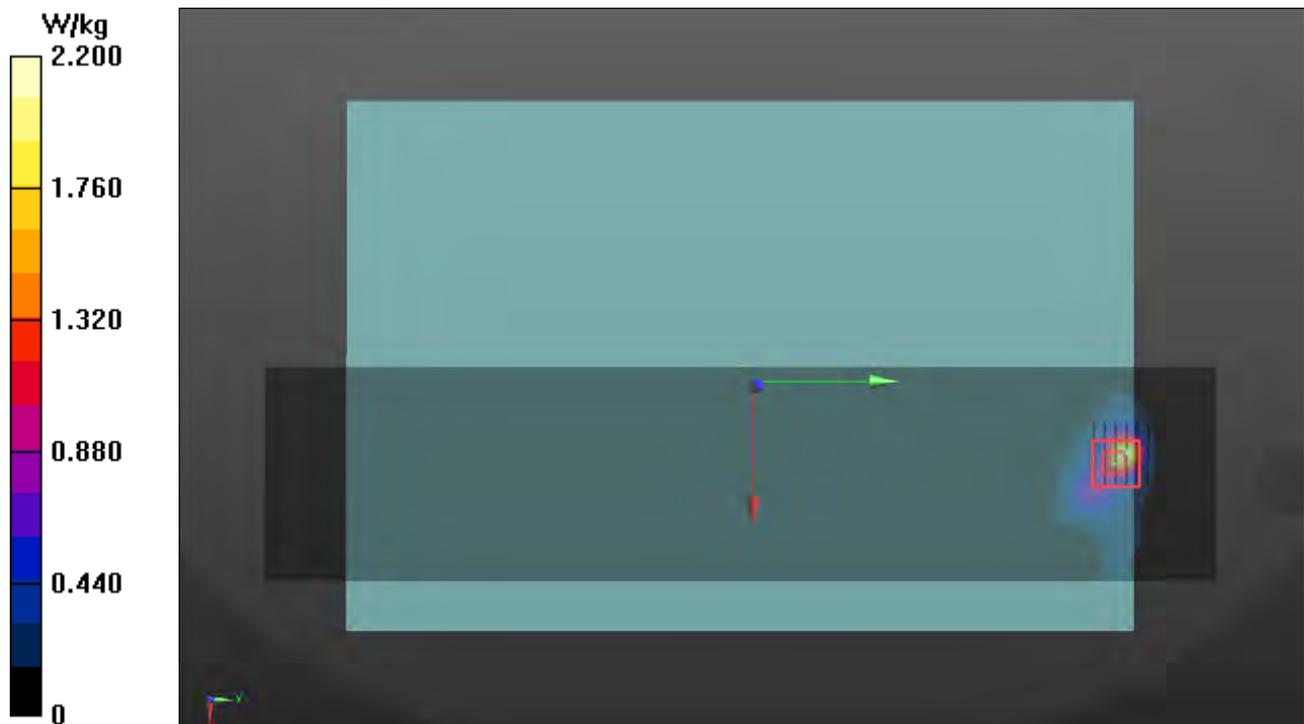

Plots of System Verification

Test Laboratory: Bureau Veritas ADT SAR/HAC Testing Lab

Date: 2022/03/30

P29 5GNR-n40_DFT-S QPSK80M_Rear Face_0mm_Ch472000_1RB_OS1_Ant 0_w

DUT: BFLF-WTW-P22030374

Communication System: UID 10906 - AAB, 5G NR (DFT-s-OFDM, 1 RB, 80 MHz, QPSK, 30 kHz); Frequency: 2360 MHz; Duty Cycle: 1:3.7

Medium: H19T27N0_0330 Medium parameters used: $f = 2360$ MHz; $\sigma = 1.786$ S/m; $\epsilon_r = 38.851$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.7 °C ; Liquid Temperature : 23.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7554; ConvF(7.68, 7.68, 7.68) @ 2360 MHz; Calibrated: 2021/08/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1589; Calibrated: 2021/08/20
- Phantom: ELI Phantom_2105; Type: QD OVA 004 Ax;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (91x371x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.514 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 17.00 V/m; Power Drift = -0.09 dB


Peak SAR (extrapolated) = 1.89 W/kg

SAR(1 g) = 0.638 W/kg; SAR(10 g) = 0.227 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 5.4 mm

Ratio of SAR at M2 to SAR at M1 = 40.3%

Maximum value of SAR (measured) = 1.33 W/kg

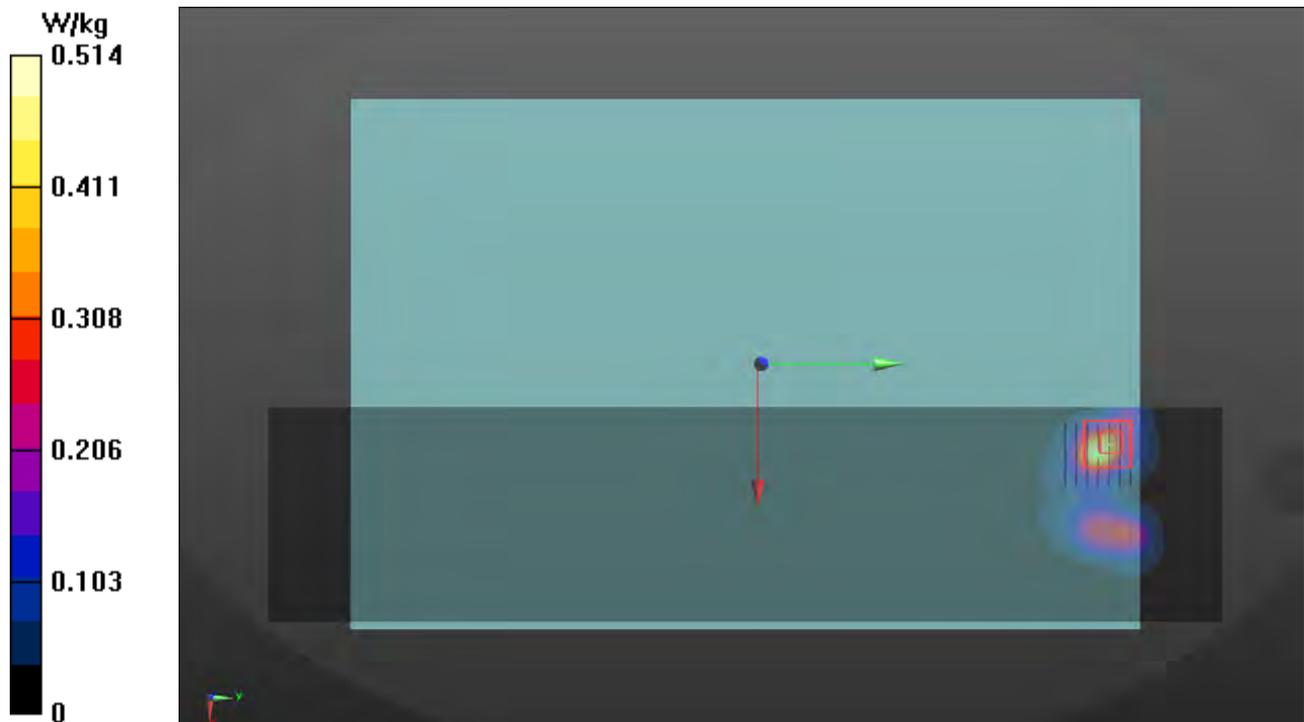

Plots of System Verification

Test Laboratory: Bureau Veritas ADT SAR/HAC Testing Lab

Date: 2022/04/02

P30 5GNR-n41_DFT-S QPSK100M_Rear Face_0mm_Ch509202_1RB_OS1_Ant 2_w

DUT: BFLF-WTW-P22030374

Communication System: UID 10866 - AAD, 5G NR (DFT-s-OFDM, 1 RB, 100 MHz, QPSK, 30 kHz); Frequency: 2546.01 MHz; Duty Cycle: 1:3.7

Medium: H19T27N0_0402 Medium parameters used (interpolated): $f = 2546.01$ MHz; $\sigma = 1.992$ S/m; $\epsilon_r = 38.225$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C ; Liquid Temperature : 23.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7554; ConvF(7.3, 7.3, 7.3) @ 2546.01 MHz; Calibrated: 2021/08/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1589; Calibrated: 2021/08/20
- Phantom: ELI Phantom_2105; Type: QD OVA 004 Ax;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (101x371x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.573 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 16.74 V/m; Power Drift = 0.06 dB


Peak SAR (extrapolated) = 1.89 W/kg

SAR(1 g) = 0.671 W/kg; SAR(10 g) = 0.271 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 5.8 mm

Ratio of SAR at M2 to SAR at M1 = 38.4%

Maximum value of SAR (measured) = 1.35 W/kg

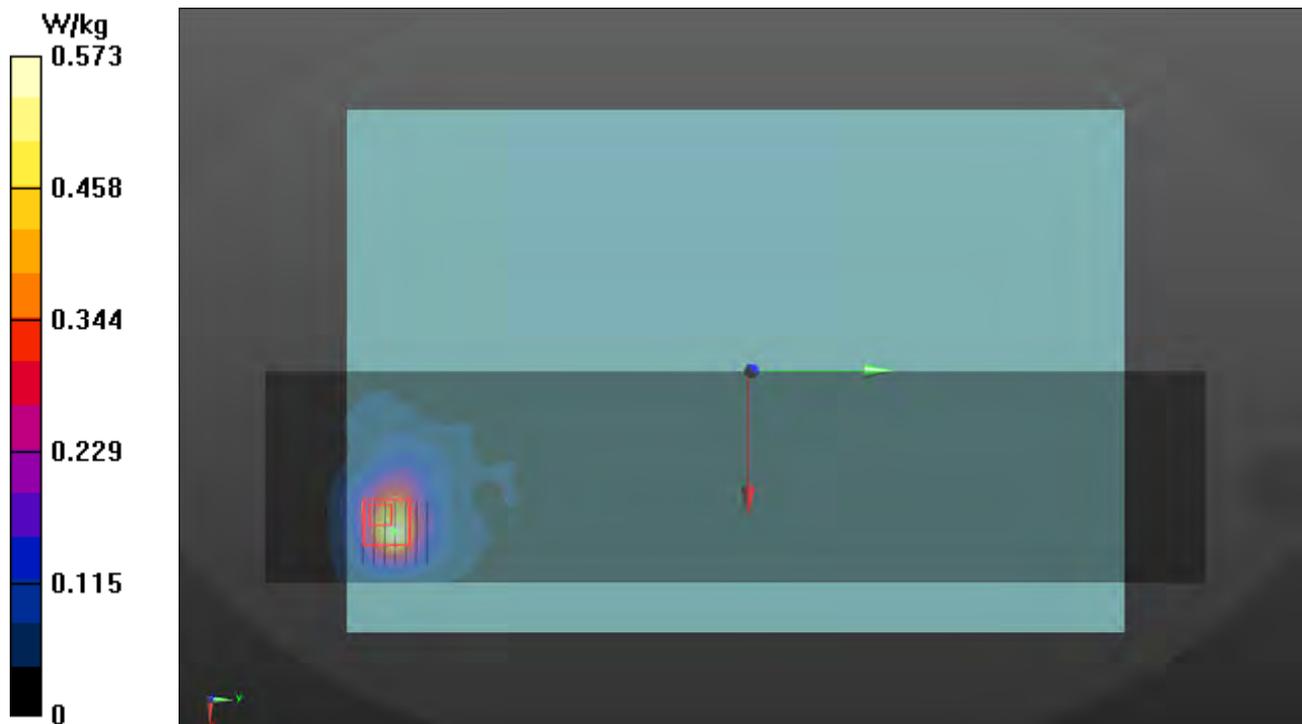

Plots of System Verification

Test Laboratory: Bureau Veritas ADT SAR/HAC Testing Lab

Date: 2022/03/22

P32 5GNR-n66_DFT-S QPSK40M_Rear Face_0mm_Ch349000_1RB_OS1_Ant 0_w

DUT: BFLF-WTW-P22030374

Communication System: UID 10934 - AAC, 5G NR (DFT-s-OFDM, 1 RB, 40 MHz, QPSK, 15 kHz); Frequency: 1745 MHz; Duty Cycle: 1:3.56

Medium: H16T20N2_0322 Medium parameters used: $f = 1745$ MHz; $\sigma = 1.372$ S/m; $\epsilon_r = 41.491$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 23.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7554; ConvF(8.54, 8.54, 8.54) @ 1745 MHz; Calibrated: 2021/08/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1589; Calibrated: 2021/08/20
- Phantom: ELI Phantom_2105; Type: QD OVA 004 Ax;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (81x301x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.696 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.31 V/m; Power Drift = -0.07 dB


Peak SAR (extrapolated) = 1.38 W/kg

SAR(1 g) = 0.627 W/kg; SAR(10 g) = 0.294 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8.2 mm

Ratio of SAR at M2 to SAR at M1 = 44.6%

Maximum value of SAR (measured) = 1.03 W/kg

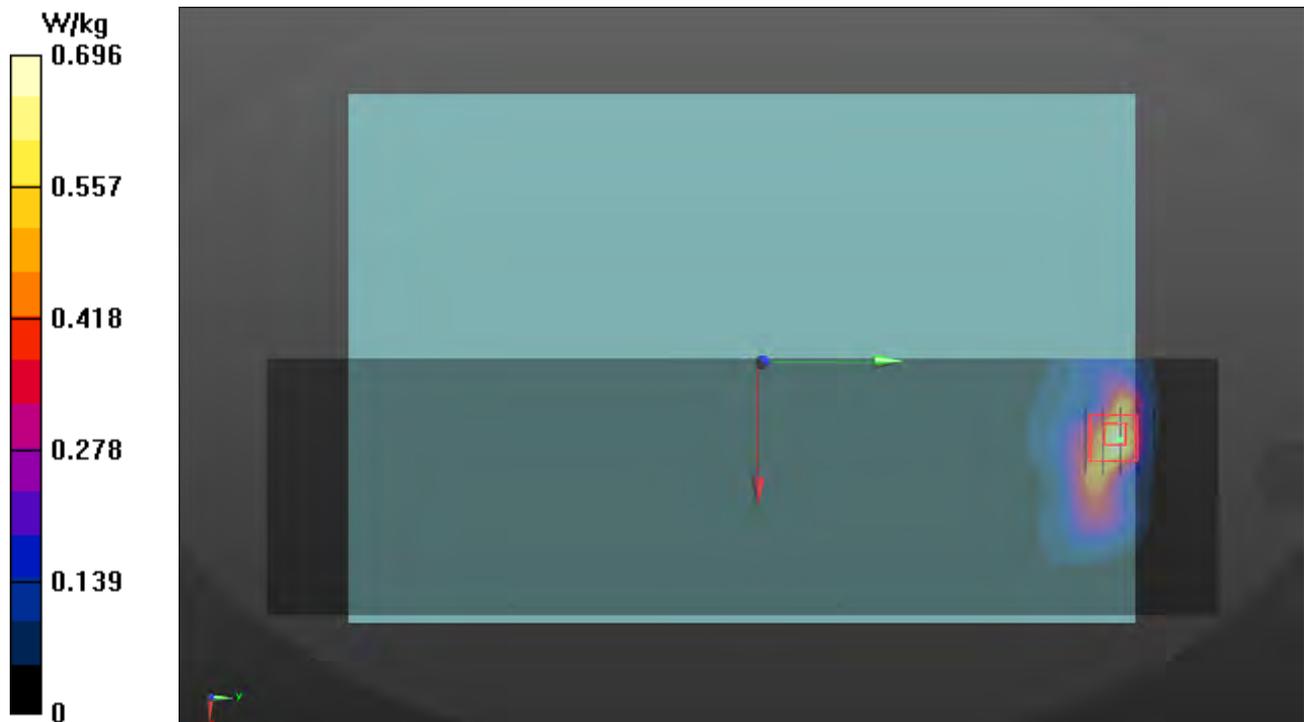

Plots of System Verification

Test Laboratory: Bureau Veritas ADT SAR/HAC Testing Lab

Date: 2022/03/28

P33 5GNR-n71_DFT-S QPSK20M_Rear Face_0mm_Ch136100_1RB_OS1_Ant 0_w

DUT: BFLF-WTW-P22030374

Communication System: UID 10931 - AAC, 5G NR (DFT-s-OFDM, 1 RB, 20 MHz, QPSK, 15 kHz); Frequency: 680.5 MHz; Duty Cycle: 1:3.56

Medium: H06T09N1_0328 Medium parameters used (interpolated): $f = 680.5$ MHz; $\sigma = 0.875$ S/m; $\epsilon_r = 44.051$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.7 °C ; Liquid Temperature : 23.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7554; ConvF(10.38, 10.38, 10.38) @ 680.5 MHz; Calibrated: 2021/08/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1589; Calibrated: 2021/08/20
- Phantom: ELI Phantom_2105; Type: QD OVA 004 Ax;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (81x301x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.752 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 29.14 V/m; Power Drift = -0.09 dB


Peak SAR (extrapolated) = 1.36 W/kg

SAR(1 g) = 0.597 W/kg; SAR(10 g) = 0.298 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 50.4%

Maximum value of SAR (measured) = 0.928 W/kg

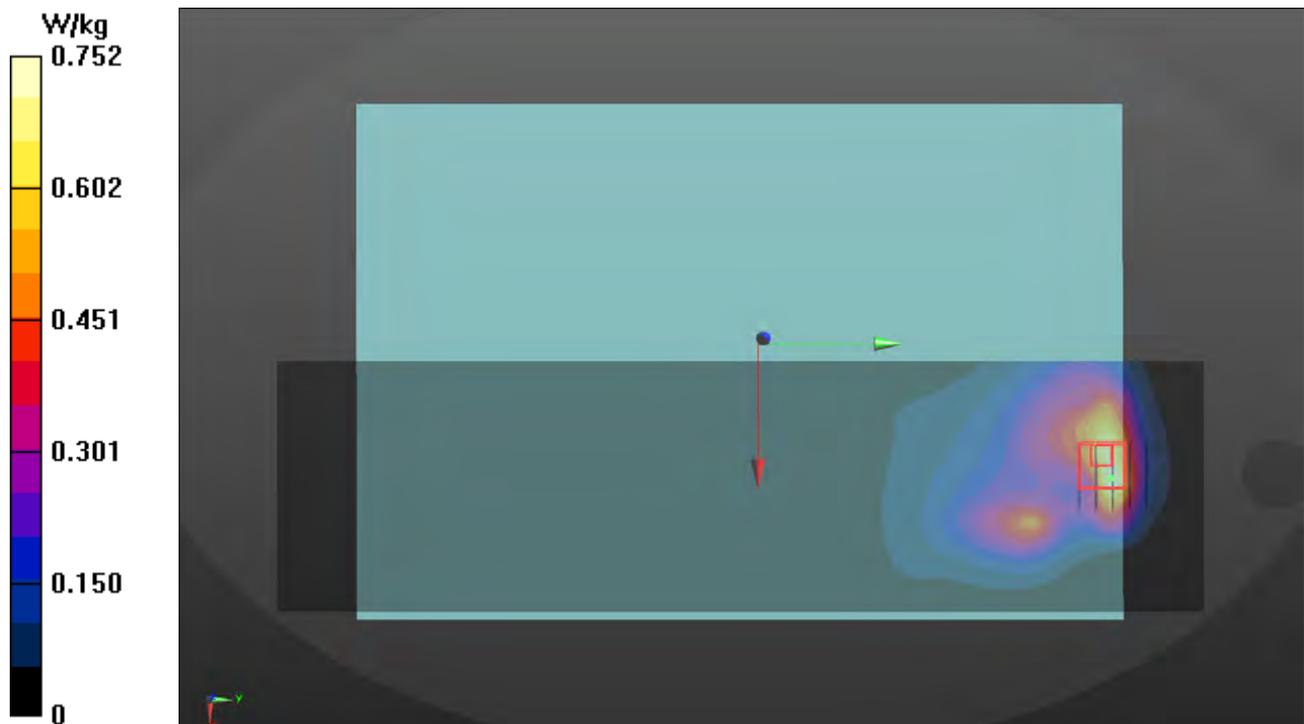

Plots of System Verification

Test Laboratory: Bureau Veritas ADT SAR/HAC Testing Lab

Date: 2022/04/02

P34 5GNR-n77_DFT-S QPSK100M_Rear Face_0mm_Ch659000_1RB_OS1_Ant 2_w

DUT: BFLF-WTW-P22030374

Communication System: UID 10866 - AAD, 5G NR (DFT-s-OFDM, 1 RB, 100 MHz, QPSK, 30 kHz); Frequency: 3885 MHz; Duty Cycle: 1:3:7

Medium: H33T42N1_0402 Medium parameters used (interpolated): $f = 3885$ MHz; $\sigma = 3.2$ S/m; $\epsilon_r = 36.37$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C ; Liquid Temperature : 23.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7554; ConvF(6.6, 6.6, 6.6) @ 3885 MHz; Calibrated: 2021/08/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1589; Calibrated: 2021/08/20
- Phantom: ELI Phantom_2105; Type: QD OVA 004 Ax;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (91x371x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm
Maximum value of SAR (interpolated) = 0.393 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=2.5$ mm

Reference Value = 10.64 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 2.35 W/kg

SAR(1 g) = 0.665 W/kg; SAR(10 g) = 0.179 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 5.4 mm

Ratio of SAR at M2 to SAR at M1 = 54.8%

Maximum value of SAR (measured) = 1.58 W/kg

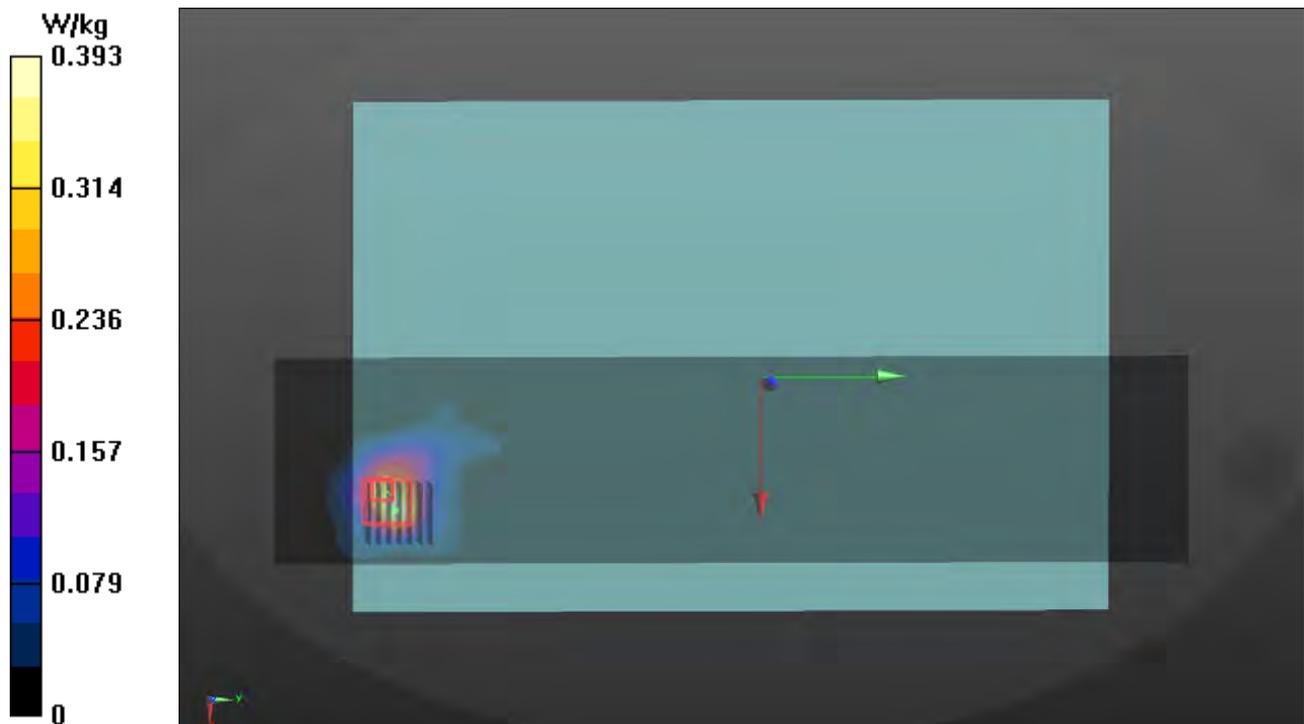

Plots of System Verification

Test Laboratory: Bureau Veritas ADT SAR/HAC Testing Lab

Date: 2022/04/02

P35 5GNR-n78_DFT-S QPSK100M_Bottom for Laptop_0mm_Ch650000_1RB_OS1_Ant 2_w

DUT: BFLF-WTW-P22030374

Communication System: UID 10866 - AAD, 5G NR (DFT-s-OFDM, 1 RB, 100 MHz, QPSK, 30 kHz); Frequency: 3750 MHz; Duty Cycle: 1:3.7

Medium: H33T42N1_0402 Medium parameters used: $f = 3750$ MHz; $\sigma = 3.141$ S/m; $\epsilon_r = 36.36$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C ; Liquid Temperature : 23.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7554; ConvF(6.7, 6.7, 6.7) @ 3750 MHz; Calibrated: 2021/08/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1589; Calibrated: 2021/08/20
- Phantom: ELI Phantom_2105; Type: QD OVA 004 Ax;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (91x371x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.29 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=2.5mm

Reference Value = 19.29 V/m; Power Drift = -0.05 dB


Peak SAR (extrapolated) = 1.78 W/kg

SAR(1 g) = 0.658 W/kg; SAR(10 g) = 0.308 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 10 mm

Ratio of SAR at M2 to SAR at M1 = 57.5%

Maximum value of SAR (measured) = 1.25 W/kg

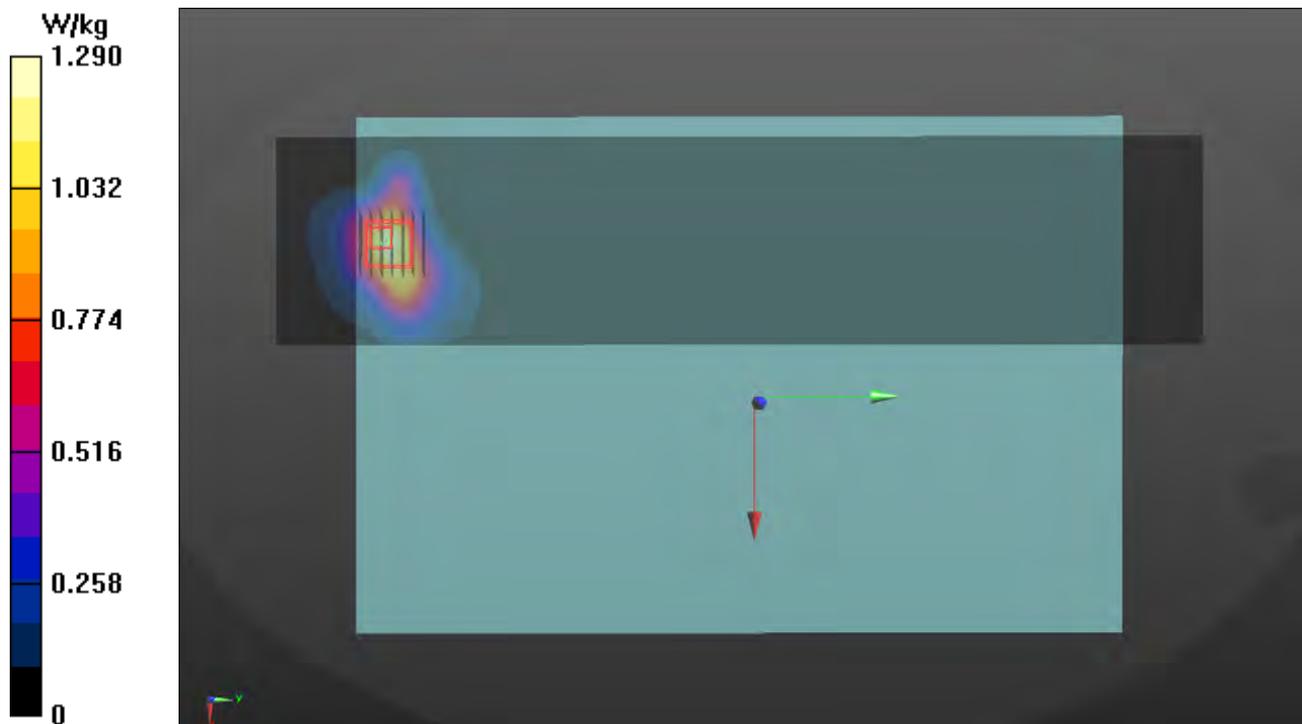

Plots of System Verification

Test Laboratory: Bureau Veritas ADT SAR/HAC Testing Lab

Date: 2022/03/21

P36 WLAN2.4G_802.11n HT20_Top Side_0mm_Ch6_Ant 0+1

DUT: BFLF-WTW-P22030374

Communication System: UID 10591 - AAC, IEEE 802.11n (HT Mixed, 20MHz, MCS0); Frequency: 2437 MHz; Duty Cycle: 1:1.01

Medium: H19T27N1_0321 Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.873$ S/m; $\epsilon_r = 38.363$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 23.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7555; ConvF(7.9, 7.9, 7.9) @ 2437 MHz; Calibrated: 2021/09/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1341; Calibrated: 2021/08/20
- Phantom: ELI Phantom_1043; Type: QD OVA 002 Ax;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (71x321x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 1.30 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 23.94 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 2.06 W/kg

SAR(1 g) = 0.738 W/kg; SAR(10 g) = 0.327 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 6.8 mm

Ratio of SAR at M2 to SAR at M1 = 57.5%

Maximum value of SAR (measured) = 1.26 W/kg

Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 23.94 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 1.28 W/kg


SAR(1 g) = 0.494 W/kg; SAR(10 g) = 0.226 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 7 mm

Ratio of SAR at M2 to SAR at M1 = 50.9%

Maximum value of SAR (measured) = 0.866 W/kg

Plots of System Verification

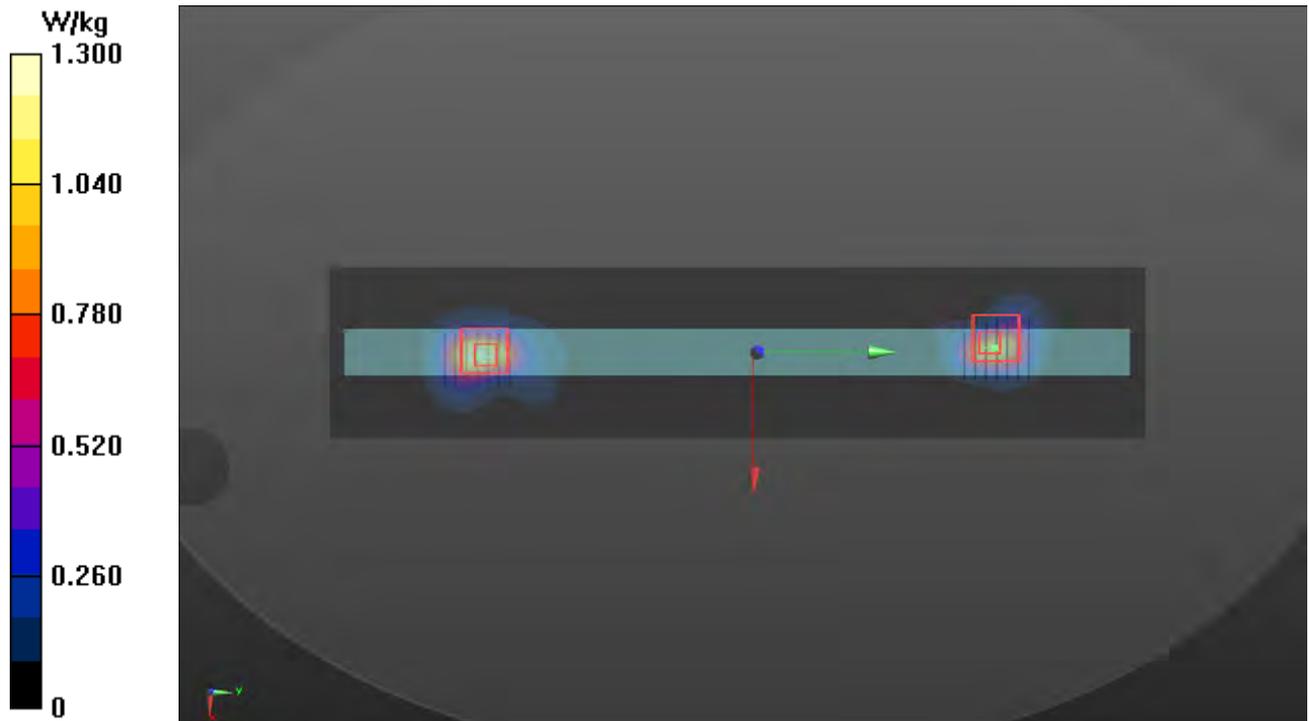

Plots of System Verification

Test Laboratory: Bureau Veritas ADT SAR/HAC Testing Lab

Date: 2022/03/21

P37 WLAN5.3G_802.11n HT20_Top Side_0mm_Ch52_Ant 0+1

DUT: BFLF-WTW-P22030374

Communication System: UID 10591 - AAC, IEEE 802.11n (HT Mixed, 20MHz, MCS0); Frequency: 5260 MHz; Duty Cycle: 1:1.01

Medium: H34T60N1_0321 Medium parameters used: $f = 5260$ MHz; $\sigma = 4.631$ S/m; $\epsilon_r = 34.901$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 23.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7555; ConvF(5.45, 5.45, 5.45) @ 5260 MHz; Calibrated: 2021/09/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1341; Calibrated: 2021/08/20
- Phantom: ELI Phantom_1043; Type: QD OVA 002 Ax;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (61x381x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.32 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 17.72 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 3.09 W/kg

SAR(1 g) = 0.728 W/kg; SAR(10 g) = 0.220 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 6.9 mm

Ratio of SAR at M2 to SAR at M1 = 63.2%

Maximum value of SAR (measured) = 1.79 W/kg

Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 17.72 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 2.28 W/kg


SAR(1 g) = 0.520 W/kg; SAR(10 g) = 0.169 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 5.8 mm

Ratio of SAR at M2 to SAR at M1 = 62.1%

Maximum value of SAR (measured) = 1.28 W/kg

Plots of System Verification

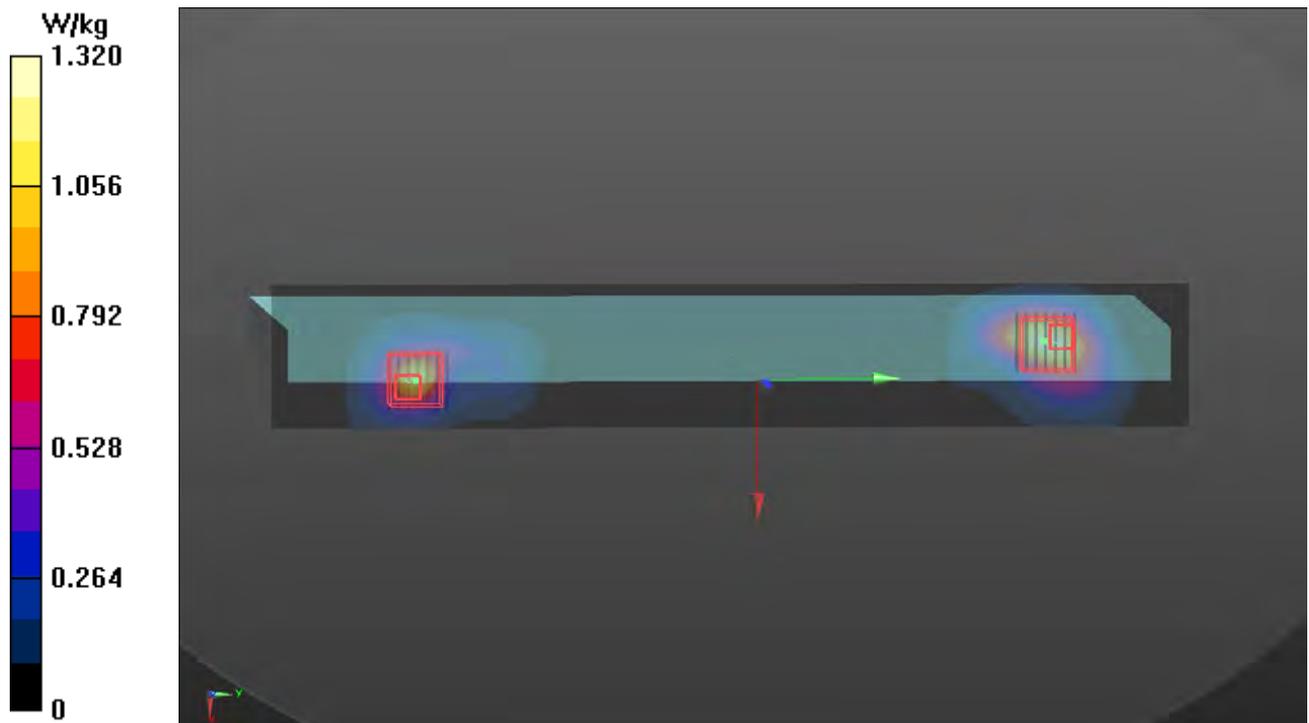

Plots of System Verification

Test Laboratory: Bureau Veritas ADT SAR/HAC Testing Lab

Date: 2022/03/20

P38 WLAN5.6G_802.11ac VHT80_Top Side_0mm_Ch138_Ant 1

DUT: BFLF-WTW-P22030374

Communication System: UID 10544 - AAC, IEEE 802.11ac WiFi (80MHz, MCS0); Frequency: 5690 MHz; Duty Cycle: 1:1.02

Medium: H34T60N1_0320 Medium parameters used: $f = 5690$ MHz; $\sigma = 5.277$ S/m; $\epsilon_r = 34.494$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C ; Liquid Temperature : 23.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7555; ConvF(5, 5, 5) @ 5690 MHz; Calibrated: 2021/09/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1341; Calibrated: 2021/08/20
- Phantom: ELI Phantom_1043; Type: QD OVA 002 Ax;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (61x381x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.46 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 16.04 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 3.06 W/kg

SAR(1 g) = 0.608 W/kg; SAR(10 g) = 0.213 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 5.4 mm

Ratio of SAR at M2 to SAR at M1 = 61.2%

Maximum value of SAR (measured) = 1.74 W/kg

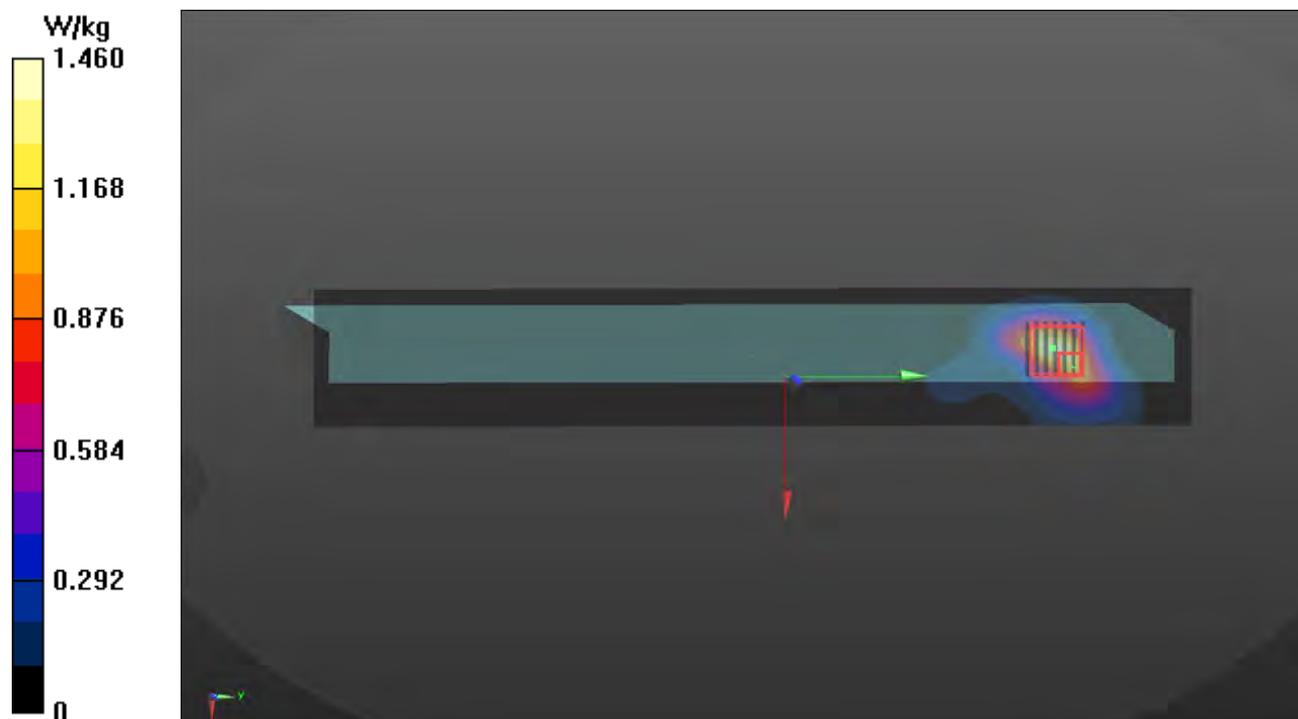

Plots of System Verification

Test Laboratory: Bureau Veritas ADT SAR/HAC Testing Lab

Date: 2022/03/21

P39 WLAN5.8G_802.11ac VHT80_Top Side_0mm_Ch155_Ant 1

DUT: BFLF-WTW-P22030374

Communication System: UID 10544 - AAC, IEEE 802.11ac WiFi (80MHz, MCS0); Frequency: 5775 MHz; Duty Cycle: 1:1.02

Medium: H34T60N1_0321 Medium parameters used: $f = 5775$ MHz; $\sigma = 5.109$ S/m; $\epsilon_r = 34.307$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 23.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7555; ConvF(5, 5, 5) @ 5775 MHz; Calibrated: 2021/09/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1341; Calibrated: 2021/08/20
- Phantom: ELI Phantom_1043; Type: QD OVA 002 Ax;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (61x381x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.84 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 18.73 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 3.68 W/kg

SAR(1 g) = 0.757 W/kg; SAR(10 g) = 0.259 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 6.4 mm

Ratio of SAR at M2 to SAR at M1 = 59.3%

Maximum value of SAR (measured) = 2.02 W/kg

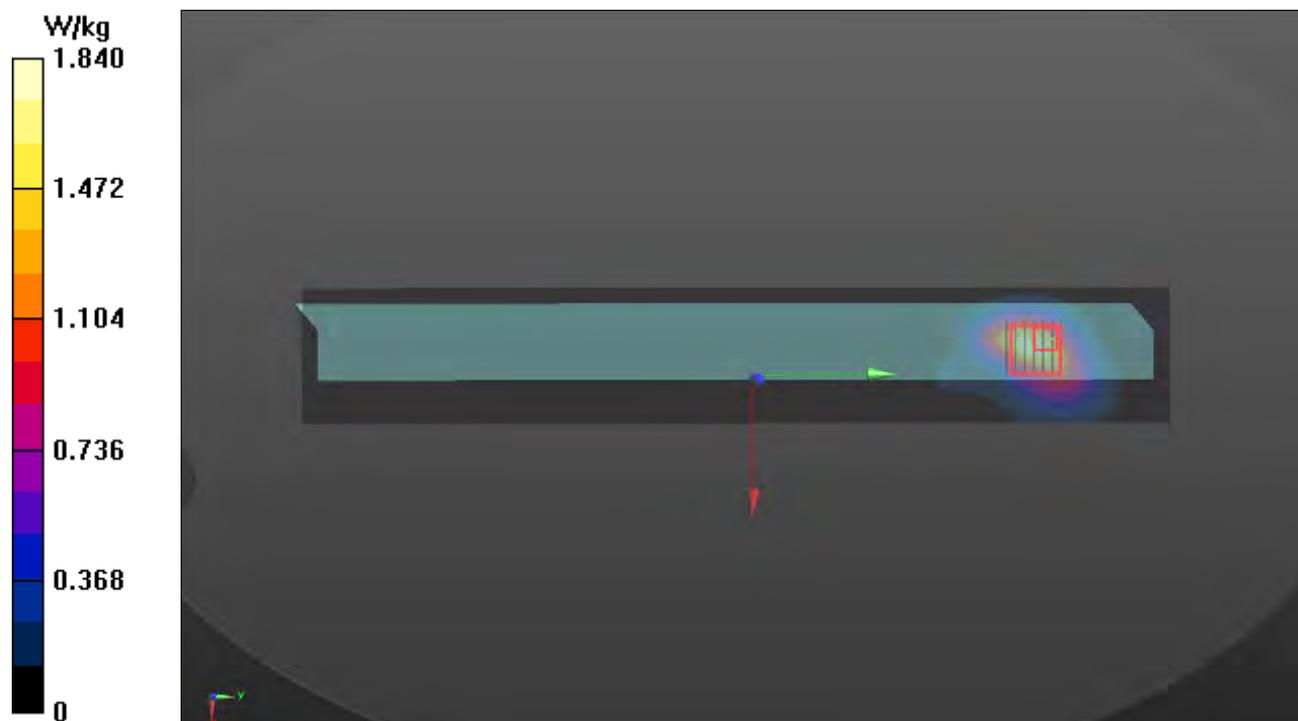

Plots of System Verification

Test Laboratory: Bureau Veritas ADT SAR/HAC Testing Lab

Date: 2022/03/20

P40 BT_BDR_Top Side_0mm_Ch78_Ant 1

DUT: BFLF-WTW-P22030374

Communication System: UID 10032 - CAA, IEEE 802.15.1 Bluetooth (GFSK, DH5); Frequency: 2480 MHz; Duty Cycle: 1:1.3

Medium: H19T27N1_0320 Medium parameters used: $f = 2480$ MHz; $\sigma = 1.909$ S/m; $\epsilon_r = 38.274$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C ; Liquid Temperature : 23.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7555; ConvF(7.9, 7.9, 7.9) @ 2480 MHz; Calibrated: 2021/09/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1341; Calibrated: 2021/08/20
- Phantom: ELI Phantom_1043; Type: QD OVA 002 Ax;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (51x321x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.103 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.744 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 0.146 W/kg

SAR(1 g) = 0.043 W/kg; SAR(10 g) = 0.019 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 6.5 mm

Ratio of SAR at M2 to SAR at M1 = 51.1%

Maximum value of SAR (measured) = 0.0763 W/kg

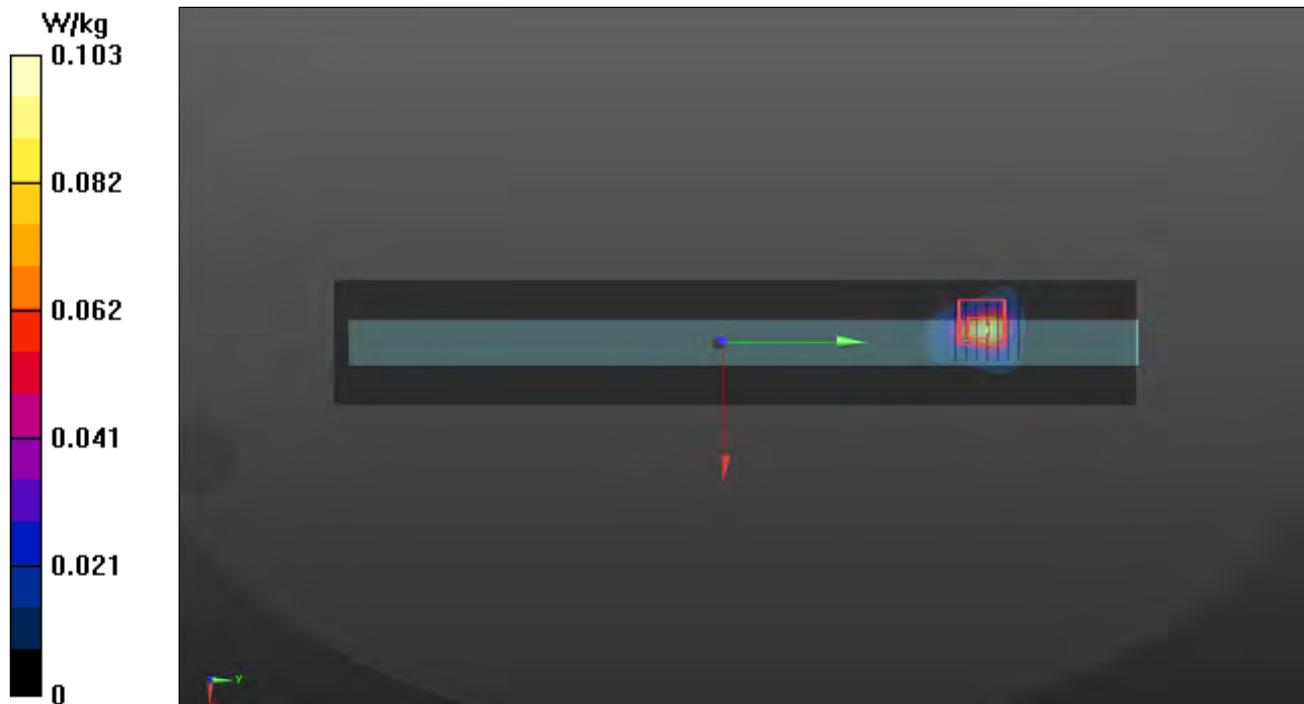

Annex C. Tissue & System Verification

The measuring results for tissue simulating liquid and system check are shown as below.

Note:

1. For Section 4.3, the dielectric properties of the tissue simulating liquid have been measured within 24 hours before the SAR testing and within $\pm 10\%$ of the target values. Liquid temperature during the SAR testing has kept within $\pm 2\text{ }^{\circ}\text{C}$.
2. For Section 4.4, The SAR measurement system was validated according to procedures in KDB 865664 D01. The validation status in tabulated summary is as below.
3. For Section 4.5, Comparing to the reference SAR value provided by SPEAG in dipole calibration certificate, the deviation of system check results is within its specification of 10 %. The result indicates the system check can meet the variation criterion and the plots please refer to Annex A of this report.

Tissue Verification									Validation for CW			Validation for Modulation			System Validation					Note				
Plot No.	Frequency (MHz)	Liquid Temp. (°C)	Conductivity (σ)	Permittivity (εr)	Targeted Conductivity (σ)	Targeted Permittivity (εr)	Deviation Conductivity (σ)	Deviation Permittivity (εr)	Sensitivity Range	Probe Linearity	Probe Isotropy	Modulation Type	Duty Factor	PAR	Date	Frequency (MHz)	Targeted 1g SAR (W/kg)	Measured 1g SAR (W/kg)	Normalized 1g SAR (W/kg)	Deviation (%)	Dipole S/N	Probe S/N	DAE S/N	Output Power (dB)
S01	1900	23.2	1.457	38.276	1.4	40	4.07	-4.31	Pass	Pass	Pass	N/A	N/A	N/A	Mar. 29, 2022	1900	40.40	2.11	42.10	4.21	5d036	3820	1431	17
S02	1750	23.2	1.275	43.531	1.37	40.1	-6.93	8.56	Pass	Pass	Pass	N/A	N/A	N/A	Mar. 23, 2022	1750	35.80	1.96	39.11	9.24	1055	3820	1431	17
S03	835	23.2	0.916	40.623	0.9	41.5	1.78	-2.11	Pass	Pass	Pass	N/A	N/A	N/A	Mar. 29, 2022	835	9.58	0.485	9.68	1.01	4d121	3820	1431	17
S04	1900	23.2	1.457	38.276	1.4	40	4.07	-4.31	Pass	Pass	Pass	N/A	N/A	N/A	Mar. 29, 2022	1900	40.40	2.11	42.10	4.21	5d036	3820	1431	17
S05	1750	23.3	1.373	39.042	1.37	40.1	0.22	-2.64	Pass	Pass	Pass	N/A	N/A	N/A	Mar. 30, 2022	1750	35.80	1.95	38.91	8.68	1055	3820	1431	17
S06	835	23.3	0.872	45.053	0.9	41.5	-3.11	8.56	Pass	Pass	Pass	N/A	N/A	N/A	Mar. 30, 2022	835	9.58	0.494	9.86	2.89	4d121	3820	1431	17
S07	2600	23.2	1.901	38.467	1.96	39	-3.01	-1.37	Pass	Pass	Pass	N/A	N/A	N/A	Mar. 29, 2022	2600	57.60	2.83	56.47	-1.97	1020	3820	1431	17
S08	750	23.2	0.921	42.312	0.9	42	2.33	0.74	Pass	Pass	Pass	N/A	N/A	N/A	Mar. 28, 2022	750	8.56	0.453	9.04	5.59	1013	7554	1589	17
S09	750	23.2	0.09	42.167	0.9	42	-90.00	0.40	Pass	Pass	Pass	N/A	N/A	N/A	Mar. 23, 2022	750	8.56	0.405	8.08	-5.60	1013	3820	1431	17
S10	750	23.2	0.09	42.167	0.9	42	-90.00	0.40	Pass	Pass	Pass	N/A	N/A	N/A	Mar. 23, 2022	750	8.56	0.405	8.08	-5.60	1013	3820	1431	17
S11	750	23.4	0.894	40.645	0.9	42	-0.67	-3.23	Pass	Pass	Pass	N/A	N/A	N/A	Mar. 31, 2022	750	8.56	0.464	9.26	8.15	1013	3820	1431	17
S12	1900	23.1	1.463	38.847	1.4	40	4.50	-2.88	Pass	Pass	Pass	N/A	N/A	N/A	Apr. 01, 2022	1900	40.40	2.09	41.70	3.22	5d036	3820	1431	17
S13	835	23.1	0.929	40.545	0.9	41.5	3.22	-2.30	Pass	Pass	Pass	N/A	N/A	N/A	Apr. 01, 2022	835	9.58	0.458	9.14	-4.61	4d121	3820	1431	17
S14	2300	23.4	1.716	38.469	1.67	39.5	2.75	-2.61	Pass	Pass	Pass	N/A	N/A	N/A	Mar. 29, 2022	2300	49.20	2.46	49.08	-0.24	1004	7554	1589	17
S15	2600	23.1	1.9	38.472	1.96	39	-3.06	-1.35	Pass	Pass	Pass	N/A	N/A	N/A	Apr. 01, 2022	2600	57.60	2.68	53.47	-7.16	1020	3820	1431	17
S16	2300	23.4	1.716	38.469	1.67	39.5	2.75	-2.61	Pass	Pass	Pass	N/A	N/A	N/A	Mar. 29, 2022	2300	49.20	2.46	49.08	-0.24	1004	7554	1589	17
S17	2600	23.3	2.03	37.454	1.96	39	3.57	-3.96	Pass	Pass	Pass	N/A	N/A	N/A	Mar. 22, 2022	2600	57.60	2.73	54.47	-5.43	1020	7554	1589	17
S20a	3500	23.1	2.922	37.452	2.91	37.9	0.41	-1.18	Pass	Pass	Pass	N/A	N/A	N/A	Mar. 27, 2022	3500	65.60	3.45	68.84	4.93	1007	3820	1431	17
S20b	3700	23.1	3.133	36.831	3.12	37.7	0.42	-2.31	Pass	Pass	Pass	N/A	N/A	N/A	Mar. 27, 2022	3700	66.70	3.43	68.44	2.60	1017	3820	1431	17
S21	1750	23.4	1.368	38.841	1.37	40.1	-0.15	-3.14	Pass	Pass	Pass	N/A	N/A	N/A	Mar. 26, 2022	1750	35.80	1.75	34.92	-2.47	1055	7554	1589	17
S22	750	23.2	0.895	43.887	0.9	42	-0.56	4.49	Pass	Pass	Pass	N/A	N/A	N/A	Mar. 28, 2022	750	8.56	0.453	9.04	5.59	1013	7554	1589	17
S23	1900	23.4	1.459	38.57	1.4	40	4.21	-3.58	Pass	Pass	Pass	N/A	N/A	N/A	Mar. 26, 2022	1900	40.40	2.03	40.50	0.26	5d036	7554	1589	17
S24	835	23.4	0.931	40.566	0.9	41.5	3.44	-2.25	Pass	Pass	Pass	N/A	N/A	N/A	Mar. 26, 2022	835	9.58	0.478	9.54	-0.45	4d121	7554	1589	17
S25	2600	23.2	2.029	37.61	1.96	39	3.52	-3.56	Pass	Pass	Pass	N/A	N/A	N/A	Mar. 28, 2022	2600	57.60	3.04	60.66	5.31	1020	7554	1589	17
S26	1900	23.4	1.45	39.054	1.4	40	3.57	-2.36	Pass	Pass	Pass	N/A	N/A	N/A	Mar. 25, 2022	1900	40.40	1.93	38.51	-4.68	5d036	3820	1431	17
S27	2300	23.4	1.716	38.469	1.67	39.5	2.75	-2.61	Pass	Pass	Pass	N/A	N/A	N/A	Mar. 29, 2022	2300	49.20	2.46	49.08	-0.24	1004	7554	1589	17
S28	2600	23.5	2.049	37.987	1.96	39	4.54	-2.60	Pass	Pass	Pass	N/A	N/A	N/A	Mar. 30, 2022	2600	57.60	2.76	55.07	-4.39	1020	7554	1589	17
S29	2300	23.5	1.714	39.064	1.67	39.5	2.63	-1.10	Pass	Pass	Pass	N/A	N/A	N/A	Mar. 30, 2022	2300	49.20	2.46	49.08	-0.24	1004	7554	1589	17
S30	2600	23.2	2.048	37.972	1.96	39	4.49	-2.64	Pass	Pass	Pass	N/A	N/A	N/A	Apr. 02, 2022	2600	57.60	2.75	54.87	-4.74	1020	7554	1589	17
S32	1750	23.3	1.374	41.484	1.37	40.1	0.29	3.45	Pass	Pass	Pass	N/A	N/A	N/A	Mar. 22, 2022	1750	35.80	1.78	35.52	-0.79	1055	7554	1589	17
S33	750	23.2	0.895	43.887	0.9	42	-0.56	4.49	Pass	Pass	Pass	N/A	N/A	N/A	Mar. 28, 2022	750	8.56	0.453	9.04	5.59	1013	7554	1589	17
S34a	3700	23.2	3.108	36.356	3.12	37.7	-0.38	-3.56	Pass	Pass	Pass	N/A	N/A	N/A	Apr. 02, 2022	3700	66.70	3.46	69.04	3.50	1017	7554	1589	17
S34b	3900	23.2	3.204	36.371	3.32	37.5	-3.49	-3.01	Pass	Pass	Pass	N/A	N/A	N/A	Apr. 02, 2022	3900	70.90	3.73	74.42	4.97	1020	7554	1589	17
S35	3700	23.2	3.108	36.356	3.12	37.7	-0.38	-3.56	Pass	Pass	Pass	N/A	N/A	N/A	Apr. 02, 2022	3700	66.70	3.46	69.04	3.50	1017	7554	1589	17
S36	2450	23.1	1.883	38.286	1.8	39.2	4.61	-2.33	Pass	Pass	Pass	OFDM	N/A	Pass	Mar. 21, 2022	2450	52.60	2.51	50.08	-4.79	737	7555	1341	17
S37	5250	23.1	4.607	34.846	4.71	35.9	-2.19	-2.94	Pass	Pass	Pass	OFDM	N/A	Pass	Mar. 21, 2022	5250	80.60	3.78	75.42	-6.43	1019	7555	1341	17
S38	5600	23.4	5.178	34.66	5.07	35.5	2.13	-2.37	Pass	Pass	Pass	OFDM	N/A	Pass	Mar. 20, 2022	5600	82.40	3.89	77.62	-5.81	1019	7555	1341	17
S39	5750	23.1	5.133	34.387	5.22	35.4	-1.67	-2.86	Pass	Pass	Pass	OFDM	N/A	Pass	Mar. 21, 2022	5750	79.40	4.16	83.00	4.54	1019	7555	1341	17
S40	2450	23.4	1.877	38.405	1.8	39.2	4.28	-2.03	Pass	Pass	Pass	OFDM	N/A	Pass	Mar. 20, 2022	2450	52.60	2.51	50.08	-4.79	737	7555	1341	17

Annex D. Maximum Target Conducted Power

The maximum conducted average power (Unit: dBm) including tune-up tolerance is shown as below.

WCDMA Max. Tune-up Power (Full)		
Mode	RMC 12.2K	HSDPA DC-HSDPA HSUPA
	Maximum Target Power	Maximum Target Power
WCDMA Band II	24.5	24.5
WCDMA Band IV	24.5	24.5
WCDMA Band V	24.5	24.5

LTE Max. Tune-up Power (Full)				
Mode	QPSK	16QAM	64QAM	256QAM
	Maximum Target Power	Maximum Target Power	Maximum Target Power	Maximum Target Power
LTE 2	24.0	23.0	22.0	19.0
LTE 4	24.0	23.0	22.0	19.0
LTE 5	24.0	23.0	22.0	19.0
LTE 7	24.0	23.0	22.0	19.0
LTE 12	24.0	23.0	22.0	19.0
LTE 13	24.0	23.0	22.0	19.0
LTE 14	24.0	23.0	22.0	19.0
LTE 17	24.0	23.0	22.0	19.0
LTE 25	24.0	23.0	22.0	19.0
LTE 26	24.0	23.0	22.0	19.0
LTE 30	24.0	23.0	22.0	19.0
LTE 38	24.0	23.0	22.0	19.0
LTE 40	24.0	23.0	22.0	19.0
LTE 41(PC2)	27.0	26.0	25.0	22.0
LTE 41(PC3)	24.0	23.0	22.0	19.0
LTE 48	22.0	21.0	20.0	17.0
LTE 66	24.0	23.0	22.0	19.0
LTE 71	24.0	23.0	22.0	19.0

5G NR Max. Tune-up Power (Full)					
DFT-S Mode	PI/2 BPSK	QPSK	16QAM	64QAM	256QAM
	Maximum Target Power				
NR 2	24.0	24.0	23.0	21.5	19.5
NR 5	24.0	24.0	23.0	21.5	19.5
NR 7	24.0	24.0	23.0	21.5	19.5
NR 25	24.0	24.0	23.0	21.5	19.5
NR 30	24.0	24.0	23.0	21.5	19.5
NR 38	24.0	24.0	23.0	21.5	19.5
NR 40	24.0	24.0	23.0	21.5	19.5
NR 41(PC2)	27.0	27.0	26.0	24.5	22.5
NR 41(PC3)	24.0	24.0	23.0	21.5	19.5
NR 66	24.0	24.0	23.0	21.5	19.5
NR 71	24.0	24.0	23.0	21.5	19.5
NR 77(PC2)	27.0	27.0	26.0	24.5	22.5
NR 78(PC2)	27.0	27.0	26.0	24.5	22.5

5G NR Max. Tune-up Power (Full)				
CP Mode	QPSK	16QAM	64QAM	256QAM
	Maximum Target Power	Maximum Target Power	Maximum Target Power	Maximum Target Power
NR 2	22.5	22.0	20.5	17.5
NR 5	22.5	22.0	20.5	17.5
NR 7	22.5	22.0	20.5	17.5
NR 25	22.5	22.0	20.5	17.5
NR 30	22.5	22.0	20.5	17.5
NR 38	22.5	22.0	20.5	17.5
NR 40	22.5	22.0	20.5	17.5
NR 41(PC2)	25.5	25.0	23.5	20.5
NR 41(PC3)	22.5	22.0	20.5	17.5
NR 66	22.5	22.0	20.5	17.5
NR 71	22.5	22.0	20.5	17.5
NR 77(PC2)	25.5	25.0	23.5	20.5
NR 77(PC3)	22.5	22.0	20.5	17.5
NR 78(PC2)	25.5	25.0	23.5	20.5
NR 78(PC3)	22.5	22.0	20.5	17.5

WCDMA Max. Tune-up Power (Laptop Mode Reduction)		
Mode	RMC 12.2K	HSDPA DC-HSDPA HSUPA
	Maximum Target Power	Maximum Target Power
WCDMA Band II	17.0	17.0
WCDMA Band IV	17.0	17.0
WCDMA Band V	20.5	20.5

LTE Max. Tune-up Power (Laptop Mode Reduction)				
Mode	QPSK	16QAM	64QAM	256QAM
	Maximum Target Power	Maximum Target Power	Maximum Target Power	Maximum Target Power
LTE 2	16.0	15.0	14.0	11.0
LTE 4	16.5	15.5	14.5	11.5
LTE 5	19.5	18.5	17.5	14.5
LTE 7	17.5	16.5	15.5	12.5
LTE 12	20.5	19.5	18.5	15.5
LTE 13	20.0	19.0	18.0	15.0
LTE 14	20.0	19.0	18.0	15.0
LTE 17	20.5	19.5	18.5	15.5
LTE 25	17.0	16.0	15.0	12.0
LTE 26	20.0	19.0	18.0	15.0
LTE 30	17.0	16.0	15.0	12.0
LTE 38	20.5	19.5	18.5	15.5
LTE 40	20.0	19.0	18.0	15.0
LTE 41	17.5	16.5	15.5	12.5
LTE 48	18.0	17.0	16.0	13.0
LTE 66	16.5	15.5	14.5	11.5
LTE 71	19.5	18.5	17.5	14.5

5G NR Max. Tune-up Power (Laptop Mode Reduction)					
DFT-S Mode	PI/2 BPSK	QPSK	16QAM	64QAM	256QAM
	Maximum Target Power				
NR 2	16.0	16.0	15.0	13.5	11.5
NR 5	19.5	19.5	18.5	17.0	15.0
NR 7	17.5	17.5	16.5	15.0	13.0
NR 25	17.5	17.5	16.5	15.0	13.0
NR 30	16.5	16.5	15.5	14.0	12.0
NR 38	17.5	17.5	16.5	15.0	13.0
NR 40	17.5	17.5	16.5	15.0	13.0
NR 41	17.0	17.0	16.0	14.5	12.5
NR 66	15.0	15.0	14.0	12.5	10.5
NR 71	23.0	23.0	22.0	20.5	18.5
NR 77	18.5	18.5	17.5	16.0	14.0
NR 78	19.0	19.0	18.0	16.5	14.5

5G NR Max. Tune-up Power (Laptop Mode Reduction)				
CP Mode	QPSK	16QAM	64QAM	256QAM
	Maximum Target Power	Maximum Target Power	Maximum Target Power	Maximum Target Power
NR 2	14.5	14.0	12.5	9.5
NR 5	18.0	17.5	16.0	13.0
NR 7	16.0	15.5	14.0	11.0
NR 25	16.0	15.5	14.0	11.0
NR 30	15.0	14.5	13.0	10.0
NR 38	16.0	15.5	14.0	11.0
NR 40	16.0	15.5	14.0	11.0
NR 41	15.5	15.0	13.5	10.5
NR 66	13.5	13.0	11.5	8.5
NR 71	21.5	21.0	19.5	16.5
NR 77	17.0	16.5	15.0	12.0
NR 78	17.5	17.0	15.5	12.5

WCDMA Max. Tune-up Power (Tablet Mode Reduction)		
Mode	RMC 12.2K	HSDPA DC-HSDPA HSUPA
	Maximum Target Power	Maximum Target Power
WCDMA Band II	14.0	14.0
WCDMA Band IV	14.0	14.0
WCDMA Band V	18.5	18.5

LTE Max. Tune-up Power (Tablet Mode Reduction)				
Mode	QPSK	16QAM	64QAM	256QAM
	Maximum Target Power	Maximum Target Power	Maximum Target Power	Maximum Target Power
LTE 2	14.0	13.0	12.0	9.0
LTE 4	14.5	13.5	12.5	9.5
LTE 5	18.5	17.5	16.5	13.5
LTE 7	11.5	10.5	9.5	6.5
LTE 12	16.5	15.5	14.5	11.5
LTE 13	17.0	16.0	15.0	12.0
LTE 14	17.5	16.5	15.5	12.5
LTE 17	17.0	16.0	15.0	12.0
LTE 25	14.0	13.0	12.0	9.0
LTE 26	18.0	17.0	16.0	13.0
LTE 30	13.0	12.0	11.0	8.0
LTE 38	14.0	13.0	12.0	9.0
LTE 40	15.0	14.0	13.0	10.0
LTE 41	11.0	10.0	9.0	6.0
LTE 48	12.0	11.0	10.0	7.0
LTE 66	15.0	14.0	13.0	10.0
LTE 71	16.5	15.5	14.5	11.5

5G NR Max. Tune-up Power (Tablet Mode Reduction)					
DFT-S Mode	PI/2 BPSK	QPSK	16QAM	64QAM	256QAM
	Maximum Target Power				
NR 2	15.5	15.5	14.5	13.0	11.0
NR 5	19.5	19.5	18.5	17.0	15.0
NR 7	12.5	12.5	11.5	10.0	8.0
NR 25	15.5	15.5	14.5	13.0	11.0
NR 30	13.0	13.0	12.0	10.5	8.5
NR 38	11.5	11.5	10.5	9.0	7.0
NR 40	12.5	12.5	11.5	10.0	8.0
NR 41	12.0	12.0	11.0	9.5	7.5
NR 66	15.0	15.0	14.0	12.5	10.5
NR 71	20.0	20.0	19.0	17.5	15.5
NR 77	10.5	10.5	9.5	8.0	6.0
NR 78	10.5	10.5	9.5	8.0	6.0

5G NR Max. Tune-up Power (Tablet Mode Reduction)				
CP Mode	QPSK	16QAM	64QAM	256QAM
	Maximum Target Power	Maximum Target Power	Maximum Target Power	Maximum Target Power
NR 2	14.0	13.5	12.0	9.0
NR 5	18.0	17.5	16.0	13.0
NR 7	11.0	10.5	9.0	6.0
NR 25	14.0	13.5	12.0	9.0
NR 30	11.5	11.0	9.5	6.5
NR 38	10.0	9.5	8.0	5.0
NR 40	11.0	10.5	9.0	6.0
NR 41	10.5	10.0	8.5	5.5
NR 66	13.5	13.0	11.5	8.5
NR 71	18.5	18.0	16.5	13.5
NR 77	9.0	8.5	7.0	4.0
NR 78	9.0	8.5	7.0	4.0

WLAN Tune-up Power (Laptop Mode)							
WLAN 2.4GHz							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11b	1	2412	19.0	19.5			
	6	2437	20.0	20.0			
	11	2462	19.5	19.5			
	12	2467	18.5	18.5			
	13	2472	15.0	15.0			
802.11g	1	2412	17.0	17.0			
	6	2437	20.0	20.0			
	11	2462	17.0	17.0			
	12	2467	15.0	15.0			
	13	2472	1.5	1.5			
802.11n HT20	1	2412	17.0	17.0	14.0	14.0	17.0
	6	2437	20.0	20.0	17.5	17.5	20.5
	11	2462	15.5	15.5	15.0	15.0	18.0
	12	2467	15.0	15.0	12.0	12.0	15.0
	13	2472	1.5	1.5	-1.5	-1.5	1.5
802.11n HT40	3	2422	16.5	16.5	13.5	13.5	16.5
	6	2437	15.5	15.5	14.5	14.5	17.5
	9	2452	16.0	14.5	13.0	13.0	16.0
	10	2457	12.5	12.5	9.5	9.5	12.5
	11	2462	5.0	5.0	2.0	2.0	5.0
802.11ax HE20	1	2412	17.0	17.0	14.0	14.0	17.0
	6	2437	20.0	20.0	17.5	17.5	20.5
	11	2462	15.5	15.5	14.5	14.5	17.5
	12	2467	15.0	15.0	12.0	12.0	15.0
	13	2472	1.5	1.5	-1.5	-1.5	1.5
802.11ax HE40	3	2422	16.5	16.5	13.5	13.5	16.5
	6	2437	15.5	15.5	14.5	14.5	17.5
	9	2452	16.0	15.0	13.0	13.0	16.0
	10	2457	12.5	12.5	9.5	9.5	12.5
	11	2462	5.0	5.0	2.0	2.0	5.0

WLAN Tune-up Power (Laptop Mode)				
Bluetooth				
Mode	Channel	Frequency		Ant 1 Max Tune-up
BR / EDR	0	2402		8
	39	2441		8
	78	2480		8
LE	0	2402		7
	19	2440		7
	39	2480		7

WLAN Tune-up Power (Laptop Mode)							
WLAN 5.2GHz							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11a	36	5180	18.50	18.50			
	40	5200	19.25	19.25			
	44	5220	20.00	20.00			
	48	5240	20.00	20.00			
802.11n HT20	36	5180	18.50	18.50	15.50	15.50	18.50
	40	5200	19.25	19.25	16.25	16.25	19.25
	44	5220	20.00	20.00	17.50	17.50	20.50
	48	5240	20.00	20.00	17.50	17.50	20.50
802.11n HT40	38	5190	18.50	18.50	15.50	15.50	18.50
	46	5230	20.00	20.00	17.25	17.25	20.25
802.11ac VHT80	42	5210	18.25	18.25	15.25	15.25	18.25
802.11ax HE20	36	5180	18.50	18.50	15.50	15.50	18.50
	40	5200	19.25	19.25	16.25	16.25	19.25
	44	5220	20.00	20.00	17.50	17.50	20.50
	48	5240	20.00	20.00	17.50	17.50	20.50
802.11ax HE40	38	5190	18.50	18.50	15.50	15.50	18.50
	46	5230	20.00	20.00	17.25	17.25	20.25
802.11ax HE80	42	5210	15.00	15.00	14.25	14.25	17.25

WLAN Tune-up Power (Laptop Mode)							
WLAN 5.3GHz							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11a	52	5260	20.00	20.00			
	56	5280	20.00	20.00			
	60	5300	19.00	19.00			
	64	5320	18.00	18.00			
802.11n HT20	52	5260	20.00	20.00	17.50	17.50	20.50
	56	5280	20.00	20.00	17.50	17.50	20.50
	60	5300	19.00	19.00	16.00	16.00	19.00
	64	5320	18.00	18.00	15.00	15.00	18.00
802.11n HT40	54	5270	19.25	19.75	16.25	16.25	19.25
	62	5310	17.00	17.50	14.00	14.00	17.00
802.11ac VHT80	58	5290	17.25	17.25	14.25	14.25	17.25
802.11ac VHT160	50	5250	14.25	14.00	11.00	11.00	14.00
802.11ax HE20	52	5260	20.00	20.00	17.50	17.50	20.50
	56	5280	20.00	20.00	17.50	17.50	20.50
	60	5300	19.00	19.00	16.00	16.00	19.00
	64	5320	18.00	18.00	15.00	15.00	18.00
802.11ax HE40	54	5270	19.25	19.75	16.25	16.25	19.25
	62	5310	17.00	17.50	14.00	14.00	17.00
802.11ax HE80	58	5290	17.25	17.25	14.25	14.25	17.25
802.11ax HE160	50	5250	14.25	14.00	11.00	11.00	14.00

WLAN Tune-up Power (Laptop Mode)							
WLAN 5.6GHz							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11a	100	5500	18.50	18.50			
	116	5580	20.00	20.00			
	120	5600	20.00	20.00			
	124	5620	20.00	20.00			
	132	5660	20.00	20.00			
	140	5700	18.50	17.50			
	144	5720	20.00	20.00			
802.11n HT20	100	5500	18.50	18.50	15.50	15.50	18.50
	116	5580	17.50	17.50	14.50	14.50	17.50
	120	5600	20.00	20.00	17.50	17.50	20.50
	124	5620	20.00	20.00	17.50	17.50	20.50
	132	5660	20.00	20.00	17.50	17.50	20.50
	140	5700	18.50	17.50	14.50	14.50	17.50
	144	5720	20.00	20.00	17.25	17.25	20.25
802.11n HT40	102	5510	17.50	17.50	14.50	14.50	17.50
	110	5550	18.50	18.50	15.50	15.50	18.50
	118	5590	20.00	20.00	17.50	17.50	20.50
	126	5630	20.00	20.00	17.00	17.00	20.00
	134	5670	19.50	19.50	17.00	17.00	20.00
	142	5710	20.00	20.00	17.50	17.50	20.50
802.11ac VHT80	106	5530	18.50	18.50	15.50	15.50	18.50
	122	5610	20.00	20.00	17.50	17.50	20.50
	138	5690	20.00	20.00	17.50	17.50	20.50
802.11ac VHT160	114	5570	13.75	13.75	10.75	10.75	13.75
802.11ax HE20	100	5500	18.50	18.50	15.50	15.50	18.50
	116	5580	17.50	17.50	14.50	14.50	17.50
	120	5600	20.00	20.00	17.50	17.50	20.50
	124	5620	20.00	20.00	17.50	17.50	20.50
	132	5660	20.00	20.00	17.50	17.50	20.50
	140	5700	18.50	17.50	14.50	14.50	17.50
	144	5720	20.00	20.00	17.25	17.25	20.25
802.11ax HE40	102	5510	17.50	17.50	14.50	14.50	17.50
	110	5550	18.50	18.50	15.50	15.50	18.50
	118	5590	20.00	20.00	17.50	17.50	20.50
	126	5630	20.00	20.00	17.00	17.00	20.00
	134	5670	19.00	19.00	17.00	17.00	20.00
	142	5710	20.00	20.00	17.50	17.50	20.50
802.11ax HE80	106	5530	18.50	18.50	15.50	15.50	18.50
	122	5610	19.50	19.50	17.50	17.50	20.50
	138	5690	20.00	20.00	17.50	17.50	20.50
802.11ax HE160	114	5570	13.75	13.75	10.75	10.75	13.75

WLAN Tune-up Power (Laptop Mode)							
WLAN 5.8GHz							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11a	149	5745	20.00	20.00			
	153	5765	20.00	20.00			
	157	5785	20.00	20.00			
	161	5805	20.00	20.00			
	165	5825	20.00	20.00			
802.11n HT20	149	5745	20.00	20.00	17.25	17.25	20.25
	153	5765	20.00	20.00	17.25	17.25	20.25
	157	5785	20.00	20.00	17.25	17.25	20.25
	161	5805	20.00	20.00	17.25	17.25	20.25
	165	5825	20.00	20.00	17.25	17.25	20.25
802.11n HT40	151	5755	20.00	20.00	17.50	17.50	20.50
	159	5795	20.00	20.00	17.50	17.50	20.50
802.11ac VHT80	155	5775	18.50	19.00	16.00	16.00	19.00
802.11ax HE20	149	5745	20.00	20.00	17.25	17.25	20.25
	153	5765	20.00	20.00	17.25	17.25	20.25
	157	5785	20.00	20.00	17.25	17.25	20.25
	161	5805	20.00	20.00	17.25	17.25	20.25
	165	5825	20.00	20.00	17.25	17.25	20.25
802.11ax HE40	151	5755	20.00	20.00	17.50	17.50	20.50
	159	5795	20.00	20.00	17.50	17.50	20.50
802.11ax HE80	155	5775	18.50	19.00	16.00	16.00	19.00

WLAN Tune-up Power (Tablet Mode)							
WLAN 2.4GHz							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11b	1	2412	17.0	19.5			
	6	2437	17.0	20.0			
	11	2462	17.0	19.5			
	12	2467	17.0	18.5			
	13	2472	15.0	15.0			
802.11g	1	2412	16.5	17.0			
	6	2437	17.0	20.0			
	11	2462	16.5	17.0			
	12	2467	15.0	15.0			
	13	2472	1.5	1.5			
802.11n HT20	1	2412	16.5	17.0	14.0	14.0	17.0
	6	2437	17.0	20.0	17.5	17.5	20.5
	11	2462	15.5	15.5	15.0	15.0	18.0
	12	2467	15.0	15.0	12.0	12.0	15.0
	13	2472	1.5	1.5	-1.5	-1.5	1.5
802.11n HT40	3	2422	16.5	16.5	13.5	13.5	16.5
	6	2437	15.5	15.5	14.5	14.5	17.5
	9	2452	16.0	14.5	13.0	13.0	16.0
	10	2457	12.5	12.5	9.5	9.5	12.5
	11	2462	5.0	5.0	2.0	2.0	5.0
802.11ax HE20	1	2412	16.5	17.0	14.0	14.0	17.0
	6	2437	17.0	20.0	17.5	17.5	20.5
	11	2462	15.5	15.5	14.5	14.5	17.5
	12	2467	15.0	15.0	12.0	12.0	15.0
	13	2472	1.5	1.5	-1.5	-1.5	1.5
802.11ax HE40	3	2422	16.5	16.5	13.5	13.5	16.5
	6	2437	15.5	15.5	14.5	14.5	17.5
	9	2452	16.0	15.0	13.0	13.0	16.0
	10	2457	12.5	12.5	9.5	9.5	12.5
	11	2462	5.0	5.0	2.0	2.0	5.0

WLAN Tune-up Power (Tablet Mode)				
Bluetooth				
Mode	Channel	Frequency		Ant 1 Max Tune-up
BR / EDR	0	2402		8
	39	2441		8
	78	2480		8
LE	0	2402		7
	19	2440		7
	39	2480		7

WLAN Tune-up Power (Tablet Mode)							
WLAN 5.2GHz							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11a	36	5180	17.50	18.00			
	40	5200	17.50	18.00			
	44	5220	17.50	18.00			
	48	5240	17.50	18.00			
802.11n HT20	36	5180	17.50	18.00	15.50	15.50	18.50
	40	5200	17.50	18.00	16.25	16.25	19.25
	44	5220	17.50	18.00	17.00	17.00	20.00
	48	5240	17.50	18.00	17.00	17.00	20.00
802.11n HT40	38	5190	17.50	18.00	15.50	15.50	18.50
	46	5230	17.50	18.00	17.25	17.25	20.25
802.11ac VHT80	42	5210	17.50	18.00	15.25	15.25	18.25
802.11ax HE20	36	5180	17.50	18.00	15.50	15.50	18.50
	40	5200	17.50	18.00	16.25	16.25	19.25
	44	5220	17.50	18.00	17.00	17.00	20.00
	48	5240	17.50	18.00	17.00	17.00	20.00
802.11ax HE40	38	5190	17.50	18.00	15.50	15.50	18.50
	46	5230	17.50	18.00	17.25	17.25	20.25
802.11ax HE80	42	5210	15.00	15.00	14.25	14.25	17.25

WLAN Tune-up Power (Tablet Mode)							
WLAN 5.3GHz							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11a	52	5260	17.50	16.50			
	56	5280	17.50	16.50			
	60	5300	17.50	16.50			
	64	5320	17.50	16.50			
802.11n HT20	52	5260	17.50	16.50	17.00	17.00	20.00
	56	5280	17.50	16.50	17.00	17.00	20.00
	60	5300	17.50	16.50	16.00	16.00	19.00
	64	5320	17.50	16.50	15.00	15.00	18.00
802.11n HT40	54	5270	17.50	16.50	16.25	16.25	19.25
	62	5310	17.50	16.50	14.00	14.00	17.00
802.11ac VHT80	58	5290	17.25	16.50	14.25	14.25	17.25
802.11ac VHT160	50	5250	14.25	14.00	11.00	11.00	14.00
802.11ax HE20	52	5260	17.50	16.50	17.00	17.00	20.00
	56	5280	17.50	16.50	17.00	17.00	20.00
	60	5300	17.50	16.50	16.00	16.00	19.00
	64	5320	17.50	16.50	15.00	15.00	18.00
802.11ax HE40	54	5270	17.50	16.50	16.25	16.25	19.25
	62	5310	17.50	16.50	14.00	14.00	17.00
802.11ax HE80	58	5290	17.25	16.50	14.25	14.25	17.25
802.11ax HE160	50	5250	14.25	14.00	11.00	11.00	14.00

WLAN Tune-up Power (Tablet Mode)							
WLAN 5.6GHz							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11a	100	5500	14.50	17.00			
	116	5580	14.50	17.00			
	120	5600	14.50	17.00			
	124	5620	14.50	17.00			
	132	5660	14.50	17.00			
	140	5700	14.50	17.00			
	144	5720	14.50	17.00			
802.11n HT20	100	5500	14.50	17.00	14.50	14.50	17.50
	116	5580	14.50	17.00	14.50	14.50	17.50
	120	5600	14.50	17.00	14.50	14.50	17.50
	124	5620	14.50	17.00	14.50	14.50	17.50
	132	5660	14.50	17.00	14.50	14.50	17.50
	140	5700	14.50	17.00	14.50	14.50	17.50
	144	5720	14.50	17.00	14.50	14.50	17.50
802.11n HT40	102	5510	14.50	17.00	14.50	14.50	17.50
	110	5550	14.50	17.00	14.50	14.50	17.50
	118	5590	14.50	17.00	14.50	14.50	17.50
	126	5630	14.50	17.00	14.50	14.50	17.50
	134	5670	14.50	17.00	14.50	14.50	17.50
	142	5710	14.50	17.00	14.50	14.50	17.50
802.11ac VHT80	106	5530	14.50	17.00	14.50	14.50	17.50
	122	5610	14.50	17.00	14.50	14.50	17.50
	138	5690	14.50	17.00	14.50	14.50	17.50
802.11ac VHT160	114	5570	13.75	13.75	10.75	10.75	13.75
802.11ax HE20	100	5500	14.50	17.00	14.50	14.50	17.50
	116	5580	14.50	17.00	14.50	14.50	17.50
	120	5600	14.50	17.00	14.50	14.50	17.50
	124	5620	14.50	17.00	14.50	14.50	17.50
	132	5660	14.50	17.00	14.50	14.50	17.50
	140	5700	14.50	17.00	14.50	14.50	17.50
	144	5720	14.50	17.00	14.50	14.50	17.50
802.11ax HE40	102	5510	14.50	17.00	14.50	14.50	17.50
	110	5550	14.50	17.00	14.50	14.50	17.50
	118	5590	14.50	17.00	14.50	14.50	17.50
	126	5630	14.50	17.00	14.50	14.50	17.50
	134	5670	14.50	17.00	14.50	14.50	17.50
	142	5710	14.50	17.00	14.50	14.50	17.50
802.11ax HE80	106	5530	14.50	17.00	14.50	14.50	17.50
	122	5610	14.50	17.00	14.50	14.50	17.50
	138	5690	14.50	17.00	14.50	14.50	17.50
802.11ax HE160	114	5570	13.75	13.75	10.75	10.75	13.75

WLAN Tune-up Power (Tablet Mode)							
WLAN 5.8GHz							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11a	149	5745	15.5	17.5			
	153	5765	15.5	17.5			
	157	5785	15.5	17.5			
	161	5805	15.5	17.5			
	165	5825	15.5	17.5			
802.11n HT20	149	5745	15.5	17.5	15.5	15.5	18.5
	153	5765	15.5	17.5	15.5	15.5	18.5
	157	5785	15.5	17.5	15.5	15.5	18.5
	161	5805	15.5	17.5	15.5	15.5	18.5
	165	5825	15.5	17.5	15.5	15.5	18.5
802.11n HT40	151	5755	15.5	17.5	15.5	15.5	18.5
	159	5795	15.5	17.5	15.5	15.5	18.5
802.11ac VHT80	155	5775	15.5	17.5	15.5	15.5	18.5
802.11ax HE20	149	5745	15.5	17.5	15.5	15.5	18.5
	153	5765	15.5	17.5	15.5	15.5	18.5
	157	5785	15.5	17.5	15.5	15.5	18.5
	161	5805	15.5	17.5	15.5	15.5	18.5
	165	5825	15.5	17.5	15.5	15.5	18.5
802.11ax HE40	151	5755	15.5	17.5	15.5	15.5	18.5
	159	5795	15.5	17.5	15.5	15.5	18.5
802.11ax HE80	155	5775	15.5	17.5	15.5	15.5	18.5

Annex E. Measured Conducted Power Result

The measuring conducted power (Unit: dBm) are shown as below.

WCDMA Conducted Power (Full)

Band	WCDMA II			WCDMA IV			WCDMA V		
TX Channel	9262	9400	9538	1312	1413	1513	4132	4182	4233
Rx Channel	9662	9800	9938	1537	1638	1738	4357	4407	4458
Frequency	1852.4	1880	1907.6	1712.4	1732.6	1752.6	826.4	836.4	846.6
RMC 12.2K	23.92	23.82	23.88	23.99	23.97	23.93	24.28	24.26	24.29
HSDPA Subtest-1	22.91	22.85	22.91	23.21	23.25	23.18	23.27	23.31	23.27
HSDPA Subtest-2	22.87	22.86	22.87	23.19	23.22	23.12	23.26	23.29	23.28
HSDPA Subtest-3	22.49	22.36	22.43	22.75	22.73	22.67	22.78	22.82	22.81
HSDPA Subtest-4	22.43	22.35	22.38	22.62	22.69	22.62	22.76	22.78	22.74
DC-HSDPA Subtest-1	22.79	22.73	22.76	23.16	23.13	23.05	23.16	23.22	23.15
DC-HSDPA Subtest-2	22.77	22.72	22.80	23.10	23.15	23.03	23.14	23.19	23.17
DC-HSDPA Subtest-3	22.42	22.25	22.31	22.61	22.66	22.56	22.65	22.72	22.70
DC-HSDPA Subtest-4	22.28	22.20	22.23	22.56	22.55	22.47	22.62	22.76	22.65
HSUPA Subtest-1	22.55	22.52	22.53	22.68	22.68	22.63	22.72	22.76	22.71
HSUPA Subtest-2	21.07	20.98	21.01	21.19	21.15	21.13	21.26	21.24	21.24
HSUPA Subtest-3	21.96	21.83	21.88	22.22	22.23	22.12	22.30	22.30	22.26
HSUPA Subtest-4	20.59	20.52	20.52	20.73	20.75	20.66	20.77	20.74	20.76
HSUPA Subtest-5	22.63	22.58	22.52	22.73	22.71	22.62	22.81	22.86	22.79

LTE Conducted Power (Full)							
LTE Band 2							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		18700	18900	19100	
		Frequency (MHz)		1860	1880	1900	
20M	QPSK	1	0	23.16	23.11	23.03	0
		1	50	23.13	23.08	23.01	0
		1	99	22.97	22.91	22.73	0
		50	0	22.22	22.16	22.06	1
		50	25	22.21	22.13	22.05	1
		50	50	22.19	22.12	22.02	1
20M	16QAM	100	0	22.13	22.07	21.91	1
		1	0	22.41	22.35	22.31	1
		1	50	22.38	22.32	22.29	1
		1	99	22.23	22.17	22.07	1
		50	0	21.15	21.09	20.99	2
		50	25	21.17	21.11	21.05	2
20M	64QAM	50	50	21.14	21.08	21.03	2
		100	0	21.14	21.08	20.96	2
		1	0	21.29	21.23	21.11	2
		1	50	21.28	21.22	21.07	2
		1	99	21.10	21.04	20.90	2
		50	0	20.18	20.12	20.04	3
20M	256QAM	50	25	20.15	20.09	20.03	3
		50	50	20.15	20.09	19.97	3
		100	0	20.11	20.05	19.89	3
		1	0	18.09	18.12	18.06	5
		1	50	18.16	18.19	18.16	5
		1	99	17.94	17.99	17.94	5
15M	QPSK	50	0	17.92	17.96	17.89	5
		50	25	18.04	18.05	18.02	5
		50	50	17.92	17.98	17.84	5
		100	0	17.97	18.04	17.90	5
		1	0	23.12	23.10	23.02	0
		1	37	23.09	23.02	22.99	0
15M	16QAM	1	74	22.88	22.91	22.70	0
		36	0	22.16	22.07	22.05	1
		36	19	22.18	22.12	22.03	1
		36	39	22.12	22.06	22.01	1
		75	0	22.07	22.02	21.87	1
		1	0	22.34	22.25	22.31	1
15M	64QAM	1	37	22.29	22.28	22.21	1
		1	74	22.23	22.12	22.05	1
		36	0	21.10	21.08	20.91	2
		36	19	21.11	21.04	21.01	2
		36	39	21.06	20.99	21.03	2
		75	0	21.04	21.06	20.94	2
15M	256QAM	1	0	21.25	21.19	21.10	2
		1	37	21.27	21.15	20.99	2
		1	74	21.05	20.99	20.84	2
		36	0	20.17	20.09	19.98	3
		36	19	20.08	20.06	20.01	3
		36	39	20.14	20.09	19.89	3
15M	QPSK	75	0	20.09	20.01	19.82	3
		1	0	18.04	18.07	17.97	5
		1	37	18.12	18.19	18.12	5
		1	74	17.86	17.94	17.87	5
		36	0	17.88	17.92	17.83	5
		36	19	17.94	17.98	17.94	5
15M	16QAM	36	39	17.92	17.98	17.79	5
		75	0	17.89	18.00	17.80	5

LTE Conducted Power (Full)									
LTE Band 2									
BW	MCS Index	Channel		18650	18900	19150	3GPP MPR		
		Frequency (MHz)		1855	1880	1905			
10M	QPSK	1	0	23.08	22.98	22.94	0		
		1	24	22.99	22.91	22.81	0		
		1	49	22.80	22.75	22.60	0		
		25	0	22.14	22.00	21.85	1		
		25	12	22.10	22.05	21.82	1		
		25	25	22.06	22.06	21.86	1		
10M	16QAM	50	0	21.97	22.06	21.77	1		
		1	0	22.31	22.24	22.16	1		
		1	24	22.19	22.21	22.09	1		
		1	49	22.10	21.95	21.96	1		
		25	0	20.93	20.99	20.80	2		
		25	12	20.96	21.01	20.90	2		
10M	64QAM	25	25	21.12	20.87	20.95	2		
		50	0	20.95	20.98	20.90	2		
		1	0	21.14	21.07	20.90	2		
		1	24	21.21	21.11	21.03	2		
		1	49	20.95	21.00	20.75	2		
		25	0	19.97	19.97	19.93	3		
10M	256QAM	25	12	19.96	19.94	19.90	3		
		25	25	20.05	19.97	19.87	3		
		50	0	19.93	19.87	19.78	3		
		1	0	17.98	18.09	17.81	5		
		1	24	18.08	18.07	18.05	5		
		1	49	17.73	17.89	17.83	5		
10M	256QAM	25	0	17.80	17.81	17.76	5		
		25	12	17.85	17.98	17.95	5		
		25	25	17.82	17.75	17.65	5		
		50	0	17.76	17.89	17.83	5		
		BW	MCS Index	Channel		18625	18900	19175	3GPP MPR
				Frequency (MHz)		1852.5	1880	1907.5	
5M	QPSK	1	0	23.07	23.06	22.78	0		
		1	12	22.96	22.89	22.88	0		
		1	24	22.91	22.80	22.51	0		
		12	0	22.06	21.94	21.81	1		
		12	6	22.14	22.08	21.95	1		
		12	13	22.06	22.07	21.98	1		
5M	16QAM	25	0	21.95	22.01	21.84	1		
		1	0	22.34	22.21	22.28	1		
		1	12	22.22	22.26	22.21	1		
		1	24	22.06	22.11	21.89	1		
		12	0	21.04	21.01	20.89	2		
		12	6	20.99	20.96	20.98	2		
5M	64QAM	12	13	21.02	20.93	20.92	2		
		25	0	21.07	20.96	20.95	2		
		1	0	21.12	21.09	20.96	2		
		1	12	21.06	21.07	20.97	2		
		1	24	20.91	20.87	20.75	2		
		12	0	19.99	19.91	19.96	3		
5M	256QAM	12	6	19.95	19.86	19.89	3		
		12	13	19.95	20.05	19.91	3		
		25	0	20.06	19.89	19.75	3		
		1	0	17.99	18.05	17.82	5		
		1	12	18.01	18.08	17.87	5		
		1	24	17.84	17.77	17.56	5		
5M	256QAM	12	0	17.79	17.84	17.74	5		
		12	6	17.88	17.81	17.94	5		
		12	13	17.79	17.93	17.78	5		
		25	0	17.86	17.94	17.83	5		

LTE Conducted Power (Full)									
LTE Band 2									
BW	MCS Index	Channel		18615	18900	19185	3GPP MPR		
		Frequency (MHz)		1851.5	1880	1908.5			
3M	QPSK	1	0	23.09	22.98	23.02	0		
		1	7	22.91	22.96	22.81	0		
		1	14	22.92	22.90	22.58	0		
		8	0	22.05	21.95	22.02	1		
		8	3	22.05	22.05	21.87	1		
		8	7	22.13	21.94	21.84	1		
3M	16QAM	15	0	22.04	21.97	21.67	1		
		1	0	22.35	22.26	22.26	1		
		1	7	22.23	22.21	22.16	1		
		1	14	22.21	21.94	21.96	1		
		8	0	21.05	20.90	20.84	2		
		8	3	20.94	20.95	20.94	2		
3M	64QAM	8	7	20.94	20.99	20.97	2		
		15	0	20.97	20.83	20.88	2		
		1	0	21.10	21.15	21.03	2		
		1	7	21.15	21.09	20.88	2		
		1	14	20.90	20.95	20.81	2		
		8	0	20.11	20.06	19.96	3		
3M	256QAM	8	3	20.01	20.02	19.90	3		
		8	7	20.03	19.99	19.80	3		
		15	0	20.08	19.97	19.81	3		
		1	0	18.00	17.91	17.91	5		
		1	7	18.01	17.95	17.97	5		
		1	14	17.87	17.83	17.82	5		
3M	256QAM	8	0	17.80	17.76	17.70	5		
		8	3	17.99	17.88	17.87	5		
		8	7	17.78	17.89	17.82	5		
		15	0	17.79	17.90	17.68	5		
		BW	MCS Index	Channel		18607	18900	19193	3GPP MPR
		Frequency (MHz)		1850.7	1880	1909.3			
1.4M	QPSK	1	0	23.08	23.01	23.00	0		
		1	2	23.04	23.01	22.78	0		
		1	5	22.88	22.83	22.55	0		
		3	0	23.09	23.07	22.89	0		
		3	1	23.12	22.96	22.86	0		
		3	3	23.12	22.99	22.93	0		
1.4M	16QAM	6	0	21.98	21.95	21.79	1		
		1	0	22.35	22.18	22.21	1		
		1	2	22.31	22.30	22.22	1		
		1	5	22.11	22.04	21.98	1		
		3	0	22.11	22.04	21.79	1		
		3	1	22.12	21.99	22.01	1		
1.4M	64QAM	3	3	22.00	22.00	21.83	1		
		6	0	21.04	20.97	20.76	2		
		1	0	21.18	21.07	21.00	2		
		1	2	21.20	21.02	21.00	2		
		1	5	21.02	20.88	20.87	2		
		3	0	21.03	21.02	20.87	2		
1.4M	256QAM	3	1	21.02	20.95	20.91	2		
		3	3	21.06	21.06	20.80	2		
		6	0	20.06	19.92	19.72	3		
		1	0	17.99	17.99	17.87	5		
		1	2	18.09	18.02	17.96	5		
		1	5	17.74	17.79	17.89	5		
1.4M	256QAM	3	0	17.88	17.75	17.78	5		
		3	1	17.94	17.92	17.90	5		
		3	3	17.83	17.92	17.64	5		
		6	0	17.85	17.85	17.80	5		

LTE Conducted Power (Full)							
LTE Band 4							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		20050	20175	20300	
		Frequency (MHz)		1720	1732.5	1745	
20M	QPSK	1	0	23.39	23.29	23.25	0
		1	50	23.32	23.27	23.22	0
		1	99	23.22	23.24	23.21	0
		50	0	22.46	22.45	22.38	1
		50	25	22.45	22.42	22.36	1
		50	50	22.32	22.31	22.26	1
20M	16QAM	100	0	22.36	22.33	22.23	1
		1	0	22.55	22.51	22.42	1
		1	50	22.61	22.59	22.51	1
		1	99	22.50	22.54	22.50	1
		50	0	21.33	21.35	21.33	2
		50	25	21.42	21.37	21.33	2
20M	64QAM	50	50	21.31	21.26	21.23	2
		100	0	21.33	21.32	21.24	2
		1	0	21.38	21.43	21.37	2
		1	50	21.51	21.47	21.42	2
		1	99	21.50	21.46	21.37	2
		50	0	20.35	20.36	20.26	3
20M	256QAM	50	25	20.29	20.31	20.24	3
		50	50	20.37	20.32	20.22	3
		100	0	20.33	20.29	20.27	3
		1	0	18.21	18.24	18.22	5
		1	50	18.32	18.37	18.27	5
		1	99	18.20	18.22	18.11	5
BW	MCS Index	Channel		20025	20175	20325	3GPP MPR
		Frequency (MHz)		1717.5	1732.5	1747.5	
		15M	QPSK	50	0	18.12	
50	25			18.24	18.29	18.16	5
50	50			18.14	18.22	18.06	5
100	0			18.16	18.26	18.08	5
1	0			23.35	23.19	23.23	0
1	37			23.29	23.25	23.21	0
15M	16QAM	1	74	23.14	23.22	23.16	0
		36	0	22.39	22.40	22.35	1
		36	19	22.41	22.40	22.34	1
		36	39	22.32	22.27	22.20	1
		75	0	22.27	22.25	22.17	1
		1	0	22.46	22.49	22.42	1
15M	64QAM	1	37	22.57	22.53	22.45	1
		1	74	22.50	22.54	22.46	1
		36	0	21.26	21.34	21.32	2
		36	19	21.38	21.36	21.33	2
		36	39	21.28	21.25	21.15	2
		75	0	21.28	21.32	21.14	2
15M	256QAM	1	0	21.31	21.36	21.33	2
		1	37	21.43	21.39	21.32	2
		1	74	21.49	21.42	21.28	2
		36	0	20.25	20.26	20.21	3
		36	19	20.26	20.28	20.21	3
		36	39	20.33	20.29	20.18	3
15M	256QAM	75	0	20.26	20.26	20.18	3
		1	0	18.18	18.21	18.12	5
		1	37	18.26	18.32	18.23	5
		1	74	18.15	18.15	18.05	5
		36	0	18.05	18.21	18.03	5
		36	19	18.18	18.24	18.09	5
BW	MCS Index	Channel		20025	20175	20325	3GPP MPR
		Frequency (MHz)		1717.5	1732.5	1747.5	
		36	39	18.10	18.18	17.97	
75	0	18.08	18.24	18.08	5		

LTE Conducted Power (Full)									
LTE Band 4									
BW	MCS Index	Channel		20000	20175	20350	3GPP MPR		
		Frequency (MHz)		1715	1732.5	1750			
10M	QPSK	1	0	23.19	23.21	23.25	0		
		1	24	23.25	23.08	23.01	0		
		1	49	23.04	23.12	23.09	0		
		25	0	22.28	22.29	22.36	1		
		25	12	22.32	22.33	22.30	1		
		25	25	22.27	22.16	22.16	1		
10M	16QAM	50	0	22.17	22.24	22.14	1		
		1	0	22.55	22.38	22.29	1		
		1	24	22.48	22.42	22.42	1		
		1	49	22.29	22.43	22.32	1		
		25	0	21.15	21.27	21.12	2		
		25	12	21.26	21.32	21.24	2		
10M	64QAM	25	25	21.17	21.04	21.21	2		
		50	0	21.25	21.23	21.09	2		
		1	0	21.25	21.38	21.21	2		
		1	24	21.45	21.37	21.32	2		
		1	49	21.29	21.36	21.33	2		
		25	0	20.22	20.26	20.21	3		
10M	256QAM	25	12	20.13	20.13	20.09	3		
		25	25	20.27	20.20	20.09	3		
		50	0	20.21	20.19	20.11	3		
		1	0	18.09	18.01	18.10	5		
		1	24	18.11	18.28	18.21	5		
		1	49	18.06	18.07	18.02	5		
10M	256QAM	25	0	18.07	18.13	17.95	5		
		25	12	18.19	18.09	18.05	5		
		25	25	18.05	18.16	17.94	5		
		50	0	17.98	18.19	17.96	5		
		BW	MCS Index	Channel		19975	20175	20375	3GPP MPR
		Frequency (MHz)		1712.5	1732.5	1752.5			
5M	QPSK	1	0	23.38	23.19	23.09	0		
		1	12	23.28	23.15	23.07	0		
		1	24	22.98	23.24	23.05	0		
		12	0	22.26	22.28	22.07	1		
		12	6	22.26	22.28	22.11	1		
		12	13	22.20	22.25	22.02	1		
5M	16QAM	25	0	22.34	22.17	22.03	1		
		1	0	22.47	22.40	22.18	1		
		1	12	22.38	22.48	22.44	1		
		1	24	22.29	22.32	22.30	1		
		12	0	21.11	21.17	21.25	2		
		12	6	21.35	21.30	21.18	2		
5M	64QAM	12	13	21.18	21.18	21.08	2		
		25	0	21.20	21.23	21.17	2		
		1	0	21.26	21.24	21.26	2		
		1	12	21.37	21.33	21.31	2		
		1	24	21.33	21.34	21.14	2		
		12	0	20.23	20.32	20.14	3		
5M	256QAM	12	6	20.08	20.27	20.09	3		
		12	13	20.22	20.23	20.11	3		
		25	0	20.24	20.09	20.09	3		
		1	0	18.08	18.06	18.03	5		
		1	12	18.19	18.20	18.16	5		
		1	24	18.11	18.04	17.86	5		
5M	256QAM	12	0	18.11	18.13	17.84	5		
		12	6	18.04	18.24	18.02	5		
		12	13	18.07	18.04	17.87	5		
		25	0	18.03	18.04	17.86	5		

LTE Conducted Power (Full)									
LTE Band 4									
BW	MCS Index	Channel		19965	20175	20385	3GPP MPR		
		Frequency (MHz)		1711.5	1732.5	1753.5			
3M	QPSK	1	0	23.25	23.17	23.09	0		
		1	7	23.15	23.19	23.08	0		
		1	14	23.05	23.10	23.05	0		
		8	0	22.32	22.29	22.31	1		
		8	3	22.33	22.32	22.25	1		
		8	7	22.21	22.23	22.15	1		
3M	16QAM	15	0	22.21	22.22	22.08	1		
		1	0	22.39	22.36	22.22	1		
		1	7	22.45	22.44	22.34	1		
		1	14	22.37	22.46	22.33	1		
		8	0	21.20	21.29	21.23	2		
		8	3	21.37	21.32	21.20	2		
3M	64QAM	8	7	21.25	21.18	21.07	2		
		15	0	21.19	21.17	21.15	2		
		1	0	21.32	21.34	21.30	2		
		1	7	21.36	21.30	21.23	2		
		1	14	21.35	21.33	21.21	2		
		8	0	20.28	20.23	20.16	3		
3M	256QAM	8	3	20.08	20.15	20.14	3		
		8	7	20.17	20.22	20.17	3		
		15	0	20.16	20.22	20.17	3		
		1	0	18.08	18.07	18.17	5		
		1	7	18.14	18.25	18.14	5		
		1	14	18.07	18.18	18.01	5		
3M	256QAM	8	0	17.90	18.12	17.85	5		
		8	3	18.20	18.26	17.94	5		
		8	7	18.00	18.08	17.85	5		
		15	0	18.00	18.11	17.95	5		
		BW	MCS Index	Channel		19957	20175	20393	3GPP MPR
				Frequency (MHz)		1710.7	1732.5	1754.3	
1.4M	QPSK	1	0	23.37	23.26	23.19	0		
		1	2	23.26	23.09	23.17	0		
		1	5	23.11	23.21	23.17	0		
		3	0	23.35	23.33	23.30	0		
		3	1	23.32	23.29	23.32	0		
		3	3	23.17	23.12	23.23	0		
1.4M	16QAM	6	0	22.29	22.22	22.14	1		
		1	0	22.33	22.33	22.36	1		
		1	2	22.58	22.54	22.33	1		
		1	5	22.37	22.47	22.46	1		
		3	0	22.15	22.15	22.09	1		
		3	1	22.32	22.19	22.19	1		
1.4M	64QAM	3	3	22.24	22.08	22.17	1		
		6	0	21.12	21.24	21.04	2		
		1	0	21.20	21.26	21.26	2		
		1	2	21.32	21.46	21.37	2		
		1	5	21.41	21.32	21.29	2		
		3	0	21.20	21.31	21.17	2		
1.4M	256QAM	3	1	21.15	21.13	21.20	2		
		3	3	21.33	21.22	21.11	2		
		6	0	20.19	20.25	20.06	3		
		1	0	17.99	18.16	18.08	5		
		1	2	18.22	18.28	18.22	5		
		1	5	18.05	18.13	17.98	5		
1.4M	256QAM	3	0	17.90	18.03	18.02	5		
		3	1	18.13	18.21	18.03	5		
		3	3	17.96	18.07	17.88	5		
		6	0	18.06	18.16	17.97	5		

LTE Conducted Power (Full)							
LTE Band 5							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		20450	20525	20600	
		Frequency (MHz)		829	836.5	844	
10M	QPSK	1	0	23.31	23.26	23.15	0
		1	24	23.25	23.22	23.12	0
		1	49	23.22	23.19	23.11	0
		25	0	22.35	22.27	22.31	1
		25	12	22.32	22.25	22.29	1
		25	25	22.25	22.21	22.23	1
10M	16QAM	1	0	22.48	22.39	22.44	1
		1	24	22.39	22.37	22.37	1
		1	49	22.42	22.34	22.33	1
		25	0	21.30	21.28	21.29	2
		25	12	21.32	21.25	21.29	2
		25	25	21.33	21.28	21.25	2
10M	64QAM	1	0	21.43	21.39	21.35	2
		1	24	21.44	21.32	21.34	2
		1	49	21.35	21.29	21.35	2
		25	0	20.32	20.28	20.27	3
		25	12	20.34	20.23	20.30	3
		25	25	20.27	20.21	20.27	3
10M	256QAM	1	0	18.28	18.37	18.27	5
		1	24	18.30	18.32	18.27	5
		1	49	18.22	18.31	18.18	5
		25	0	18.15	18.25	18.11	5
		25	12	18.16	18.19	18.11	5
		25	25	18.15	18.16	18.14	5
BW	MCS Index	Channel		20425	20525	20625	3GPP MPR
		Frequency (MHz)		826.5	836.5	846.5	
		1	0	23.24	23.25	23.14	
5M	QPSK	1	12	23.18	23.17	23.04	0
		1	24	23.14	23.18	23.01	0
		12	0	22.23	22.18	22.29	1
		12	6	22.29	22.19	22.19	1
		12	13	22.34	22.16	22.15	1
		25	0	22.30	22.15	22.22	1
5M	16QAM	1	0	22.42	22.30	22.40	1
		1	12	22.31	22.36	22.35	1
		1	24	22.37	22.28	22.29	1
		12	0	21.28	21.19	21.28	2
		12	6	21.32	21.19	21.22	2
		12	13	21.31	21.19	21.25	2
5M	64QAM	1	0	21.22	21.13	21.20	2
		1	0	21.38	21.31	21.25	2
		1	12	21.36	21.22	21.27	2
		1	24	21.28	21.26	21.29	2
		12	0	20.30	20.27	20.17	3
		12	6	20.24	20.21	20.20	3
5M	256QAM	12	13	20.22	20.17	20.19	3
		25	0	20.28	20.15	20.20	3
		1	0	18.18	18.33	18.21	5
		1	12	18.25	18.32	18.19	5
		1	24	18.15	18.25	18.15	5
		12	0	18.12	18.21	18.11	5
5M	256QAM	12	6	18.12	18.15	18.11	5
		12	13	18.14	18.06	18.07	5
		25	0	18.14	18.16	18.16	5

LTE Conducted Power (Full)									
LTE Band 5									
BW	MCS Index	Channel		20415	20525	20635	3GPP MPR		
		Frequency (MHz)		825.5	836.5	847.5			
3M	QPSK	1	0	23.15	23.12	23.07	0		
		1	7	23.15	23.10	22.93	0		
		1	14	23.10	23.13	22.88	0		
		8	0	22.21	22.04	22.15	1		
		8	3	22.24	22.15	22.23	1		
		8	7	22.15	22.07	22.12	1		
3M	16QAM	15	0	22.09	22.00	22.13	1		
		1	0	22.37	22.14	22.32	1		
		1	7	22.28	22.27	22.23	1		
		1	14	22.27	22.25	22.23	1		
		8	0	21.26	21.14	21.25	2		
		8	3	21.17	21.14	21.18	2		
3M	64QAM	8	7	21.26	21.23	21.02	2		
		15	0	21.08	21.09	21.18	2		
		1	0	21.41	21.24	21.21	2		
		1	7	21.21	21.26	21.26	2		
		1	14	21.22	21.24	21.34	2		
		8	0	20.18	20.15	20.15	3		
3M	256QAM	8	3	20.26	20.04	20.07	3		
		8	7	20.08	20.01	20.17	3		
		15	0	20.13	20.06	20.02	3		
		1	0	18.21	18.15	18.18	5		
		1	7	18.25	18.09	18.20	5		
		1	14	18.13	18.09	18.09	5		
3M	256QAM	8	0	17.95	18.09	17.94	5		
		8	3	17.98	18.13	17.98	5		
		8	7	17.99	17.96	18.05	5		
		15	0	18.00	18.00	18.15	5		
		BW	MCS Index	Channel		20407	20525	20643	3GPP MPR
				Frequency (MHz)		824.7	836.5	848.3	
1.4M	QPSK	1	0	23.24	23.05	23.04	0		
		1	2	23.07	23.16	23.00	0		
		1	5	23.11	23.12	23.01	0		
		3	0	22.22	22.08	22.19	0		
		3	1	22.12	22.15	22.11	0		
		3	3	22.19	22.10	22.01	0		
1.4M	16QAM	6	0	22.23	22.01	22.25	1		
		1	0	22.42	22.26	22.39	1		
		1	2	22.32	22.24	22.26	1		
		1	5	22.36	22.19	22.13	1		
		3	0	21.25	21.08	21.17	1		
		3	1	21.20	21.11	21.20	1		
1.4M	64QAM	3	3	21.10	21.24	21.08	1		
		6	0	21.25	21.18	21.11	2		
		1	0	21.20	21.23	21.16	2		
		1	2	21.26	21.20	21.22	2		
		1	5	21.26	21.05	21.14	2		
		3	0	20.15	20.11	20.17	2		
1.4M	256QAM	3	1	20.28	20.20	20.25	2		
		3	3	20.16	20.18	20.26	2		
		6	0	20.12	19.98	20.06	3		
		1	0	18.10	18.22	18.04	5		
		1	2	18.26	18.14	18.14	5		
		1	5	18.12	18.11	18.01	5		
1.4M	256QAM	3	0	18.05	18.11	18.06	5		
		3	1	18.11	18.03	17.98	5		
		3	3	17.95	18.05	18.09	5		
		6	0	18.23	18.12	18.08	5		

LTE Conducted Power (Full)									
LTE Band 7									
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)		
		Channel		20850	21100	21350			
		Frequency (MHz)		2510	2535	2560			
20M	QPSK	1	0	23.11	23.59	23.19	0		
		1	50	23.08	23.52	23.17	0		
		1	99	22.92	23.26	23.02	0		
		50	0	22.47	22.82	22.53	1		
		50	25	22.45	22.77	22.48	1		
		50	50	22.25	22.72	22.37	1		
20M	16QAM	100	0	22.35	22.71	22.35	1		
		1	0	22.48	22.88	22.57	1		
		1	50	22.69	22.98	22.72	1		
		1	99	22.34	22.94	22.44	1		
		50	0	21.47	21.76	21.57	2		
		50	25	21.40	21.74	21.49	2		
20M	64QAM	50	50	21.21	21.69	21.37	2		
		100	0	21.23	21.71	21.30	2		
		1	0	21.14	21.65	21.25	2		
		1	50	21.61	21.92	21.68	2		
		1	99	21.36	21.77	21.46	2		
		50	0	20.36	20.74	20.46	3		
20M	256QAM	50	25	20.45	20.75	20.52	3		
		50	50	20.24	20.69	20.44	3		
		100	0	20.44	20.68	20.47	3		
		1	0	18.56	18.58	18.48	5		
		1	50	18.78	18.79	18.70	5		
		1	99	18.61	18.62	18.60	5		
20M	256QAM	50	0	18.66	18.67	18.59	5		
		50	25	18.68	18.71	18.65	5		
		50	50	18.59	18.65	18.51	5		
		100	0	18.61	18.66	18.60	5		
		BW	MCS Index	Channel		20825	21100	21375	3GPP MPR
		Frequency (MHz)		2507.5	2535	2562.5			
15M	QPSK	1	0	23.05	23.55	23.16	0		
		1	37	23.04	23.43	23.15	0		
		1	74	22.87	23.18	22.95	0		
		36	0	22.44	22.73	22.46	1		
		36	19	22.39	22.77	22.46	1		
		36	39	22.18	22.71	22.29	1		
15M	16QAM	75	0	22.31	22.67	22.26	1		
		1	0	22.40	22.88	22.56	1		
		1	37	22.67	22.97	22.72	1		
		1	74	22.32	22.88	22.39	1		
		36	0	21.39	21.69	21.51	2		
		36	19	21.38	21.73	21.45	2		
15M	64QAM	36	39	21.12	21.65	21.33	2		
		75	0	21.17	21.66	21.28	2		
		1	0	21.12	21.55	21.22	2		
		1	37	21.58	21.89	21.61	2		
		1	74	21.27	21.69	21.45	2		
		36	0	20.26	20.70	20.41	3		
15M	256QAM	36	19	20.35	20.69	20.43	3		
		36	39	20.22	20.62	20.40	3		
		75	0	20.41	20.68	20.40	3		
		1	0	18.55	18.52	18.38	5		
		1	37	18.69	18.76	18.70	5		
		1	74	18.57	18.56	18.50	5		
15M	256QAM	36	0	18.65	18.60	18.51	5		
		36	19	18.64	18.70	18.55	5		
		36	39	18.52	18.59	18.41	5		
		75	0	18.51	18.56	18.55	5		

LTE Conducted Power (Full)									
LTE Band 7									
BW	MCS Index	Channel		20800	21100	21400	3GPP MPR		
		Frequency (MHz)		2505	2535	2565			
10M	QPSK	1	0	23.04	23.44	23.06	0		
		1	24	23.00	23.42	23.04	0		
		1	49	22.85	23.17	22.89	0		
		25	0	22.28	22.69	22.45	1		
		25	12	22.27	22.72	22.24	1		
		25	25	22.16	22.55	22.15	1		
10M	16QAM	50	0	22.34	22.48	22.15	1		
		1	0	22.35	22.85	22.56	1		
		1	24	22.51	22.95	22.55	1		
		1	49	22.22	22.82	22.28	1		
		25	0	21.31	21.73	21.49	2		
		25	12	21.36	21.66	21.35	2		
10M	64QAM	25	25	21.06	21.64	21.20	2		
		50	0	21.10	21.58	21.16	2		
		1	0	20.96	21.49	21.03	2		
		1	24	21.50	21.76	21.53	2		
		1	49	21.34	21.69	21.42	2		
		25	0	20.18	20.61	20.41	3		
10M	256QAM	25	12	20.34	20.50	20.37	3		
		25	25	20.18	20.62	20.37	3		
		50	0	20.34	20.56	20.25	3		
		1	0	18.53	18.44	18.44	5		
		1	24	18.57	18.69	18.51	5		
		1	49	18.58	18.61	18.53	5		
10M	256QAM	25	0	18.54	18.61	18.50	5		
		25	12	18.60	18.55	18.60	5		
		25	25	18.56	18.55	18.44	5		
		50	0	18.52	18.48	18.41	5		
		BW	MCS Index	Channel		20775	21100	21425	3GPP MPR
		Frequency (MHz)		2502.5	2535	2567.5			
5M	QPSK	1	0	22.93	23.40	22.90	0		
		1	12	22.94	23.33	22.96	0		
		1	24	22.79	23.17	22.81	0		
		12	0	22.38	22.78	22.29	1		
		12	6	22.40	22.74	22.37	1		
		12	13	22.19	22.62	22.13	1		
5M	16QAM	25	0	22.29	22.69	22.15	1		
		1	0	22.39	22.80	22.50	1		
		1	12	22.62	22.76	22.63	1		
		1	24	22.24	22.69	22.32	1		
		12	0	21.35	21.56	21.45	2		
		12	6	21.23	21.63	21.32	2		
5M	64QAM	12	13	21.10	21.56	21.26	2		
		25	0	21.07	21.62	21.20	2		
		1	0	20.94	21.49	21.02	2		
		1	12	21.46	21.81	21.50	2		
		1	24	21.26	21.61	21.28	2		
		12	0	20.17	20.55	20.31	3		
5M	256QAM	12	6	20.36	20.66	20.37	3		
		12	13	20.17	20.55	20.28	3		
		25	0	20.33	20.51	20.42	3		
		1	0	18.52	18.44	18.32	5		
		1	12	18.67	18.68	18.48	5		
		1	24	18.53	18.50	18.35	5		
5M	256QAM	12	0	18.62	18.62	18.40	5		
		12	6	18.52	18.71	18.42	5		
		12	13	18.51	18.63	18.31	5		
		25	0	18.42	18.52	18.43	5		

LTE Conducted Power (Full)							
LTE Band 12							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		23060	23095	23130	
		Frequency (MHz)		704	707.5	711	
10M	QPSK	1	0	23.62	23.66	23.64	0
		1	24	23.47	23.62	23.56	0
		1	49	23.34	23.48	23.38	0
		25	0	22.49	22.57	22.51	1
		25	12	22.44	22.52	22.45	1
		25	25	22.39	22.49	22.42	1
10M	16QAM	50	0	22.49	22.55	22.53	1
		1	0	22.74	22.87	22.84	1
		1	24	22.71	22.86	22.77	1
		1	49	22.67	22.81	22.77	1
		25	0	21.33	21.53	21.43	2
		25	12	21.45	21.52	21.46	2
10M	64QAM	25	25	21.50	21.55	21.53	2
		50	0	21.42	21.54	21.47	2
		1	0	21.61	21.74	21.69	2
		1	24	21.61	21.77	21.69	2
		1	49	21.51	21.67	21.60	2
		25	0	20.33	20.52	20.42	3
10M	256QAM	25	12	20.43	20.49	20.45	3
		25	25	20.31	20.51	20.41	3
		50	0	20.45	20.53	20.51	3
		1	0	18.58	18.68	18.53	5
		1	24	18.55	18.61	18.50	5
		1	49	18.49	18.53	18.43	5
5M	QPSK	25	0	18.48	18.48	18.42	5
		25	12	18.44	18.49	18.44	5
		25	25	18.45	18.51	18.36	5
		50	0	18.45	18.49	18.43	5
		1	0	23.57	23.56	23.54	0
		1	12	23.43	23.53	23.46	0
5M	16QAM	1	24	23.30	23.38	23.28	0
		12	0	22.48	22.47	22.49	1
		12	6	22.38	22.48	22.43	1
		12	13	22.39	22.46	22.39	1
		25	0	22.41	22.47	22.48	1
		1	0	22.64	22.85	22.78	1
5M	64QAM	1	12	22.67	22.79	22.71	1
		1	24	22.63	22.77	22.73	1
		12	0	21.23	21.48	21.41	2
		12	6	21.45	21.44	21.46	2
		12	13	21.42	21.52	21.52	2
		25	0	21.35	21.47	21.44	2
5M	256QAM	1	0	21.59	21.67	21.59	2
		1	12	21.57	21.77	21.69	2
		1	24	21.51	21.67	21.60	2
		12	0	20.28	20.47	20.37	3
		12	6	20.40	20.45	20.42	3
		12	13	20.26	20.46	20.34	3
5M	QPSK	25	0	20.35	20.52	20.49	3
		1	0	18.54	18.66	18.49	5
		1	12	18.47	18.61	18.41	5
		1	24	18.48	18.49	18.42	5
		12	0	18.45	18.46	18.39	5
		12	6	18.42	18.47	18.34	5
5M	16QAM	12	13	18.35	18.48	18.29	5
		25	0	18.36	18.47	18.38	5

LTE Conducted Power (Full)									
LTE Band 12									
BW	MCS Index	Channel		23025	23095	23165	3GPP MPR		
		Frequency (MHz)		700.5	707.5	714.5			
3M	QPSK	1	0	23.57	23.41	23.47	0		
		1	7	23.23	23.52	23.44	0		
		1	14	23.19	23.31	23.19	0		
		8	0	22.34	22.49	22.41	1		
		8	3	22.25	22.45	22.27	1		
		8	7	22.22	22.27	22.28	1		
3M	16QAM	15	0	22.39	22.42	22.44	1		
		1	0	22.52	22.73	22.63	1		
		1	7	22.57	22.74	22.71	1		
		1	14	22.51	22.62	22.70	1		
		8	0	21.16	21.41	21.26	2		
		8	3	21.33	21.49	21.38	2		
3M	64QAM	8	7	21.26	21.50	21.33	2		
		15	0	21.38	21.42	21.38	2		
		1	0	21.47	21.67	21.55	2		
		1	7	21.55	21.68	21.54	2		
		1	14	21.42	21.53	21.41	2		
		8	0	20.26	20.52	20.25	3		
3M	256QAM	8	3	20.23	20.39	20.33	3		
		8	7	20.14	20.31	20.34	3		
		15	0	20.33	20.36	20.38	3		
		1	0	18.38	18.57	18.41	5		
		1	7	18.52	18.53	18.48	5		
		1	14	18.44	18.38	18.40	5		
3M	256QAM	8	0	18.31	18.44	18.27	5		
		8	3	18.34	18.30	18.29	5		
		8	7	18.32	18.45	18.28	5		
		15	0	18.24	18.41	18.25	5		
		BW	MCS Index	Channel		23017	23095	23173	3GPP MPR
				Frequency (MHz)		699.7	707.5	715.3	
1.4M	QPSK	1	0	23.40	23.54	23.47	0		
		1	2	23.27	23.44	23.41	0		
		1	5	23.24	23.38	23.22	0		
		3	0	23.37	23.50	23.47	0		
		3	1	23.30	23.35	23.37	0		
		3	3	23.33	23.32	23.38	0		
1.4M	16QAM	6	0	22.29	22.41	22.53	1		
		1	0	22.62	22.78	22.67	1		
		1	2	22.59	22.72	22.68	1		
		1	5	22.53	22.73	22.64	1		
		3	0	22.26	22.35	22.28	1		
		3	1	22.24	22.50	22.33	1		
1.4M	64QAM	3	3	22.44	22.48	22.41	1		
		6	0	21.20	21.36	21.34	2		
		1	0	21.54	21.53	21.45	2		
		1	2	21.45	21.56	21.53	2		
		1	5	21.47	21.66	21.49	2		
		3	0	21.22	21.35	21.30	2		
1.4M	256QAM	3	1	21.35	21.48	21.39	2		
		3	3	21.20	21.46	21.23	2		
		6	0	20.40	20.37	20.42	3		
		1	0	18.36	18.58	18.48	5		
		1	2	18.41	18.39	18.28	5		
		1	5	18.40	18.33	18.39	5		
1.4M	256QAM	3	0	18.42	18.40	18.40	5		
		3	1	18.29	18.34	18.36	5		
		3	3	18.34	18.38	18.14	5		
		6	0	18.35	18.43	18.34	5		

LTE Conducted Power (Full)								
LTE Band 13								
BW	MCS Index	RB Size	RB Offset		Mid		3GPP MPR (dB)	
		Channel			23230			
		Frequency (MHz)			782			
10M	QPSK	1	0		23.42		0	
		1	24		23.39		0	
		1	49		23.36		0	
		25	0		22.32		1	
		25	12		22.29		1	
		25	25		22.27		1	
10M	16QAM	50	0		22.36		1	
		1	0		22.68		1	
		1	24		22.65		1	
		1	49		22.53		1	
		25	0		21.32		2	
		25	12		21.36		2	
10M	64QAM	25	25		21.33		2	
		50	0		21.36		2	
		1	0		21.64		2	
		1	24		21.59		2	
		1	49		21.49		2	
		25	0		20.26		3	
10M	256QAM	25	12		20.33		3	
		25	25		20.29		3	
		50	0		20.34		3	
		1	0		18.46		5	
		1	24		18.43		5	
		1	49		18.32		5	
5M	QPSK	25	0		18.25		5	
		25	12		18.27		5	
		25	25		18.23		5	
		50	0		18.33		5	
		1	0		23.37	23.39	23.38	0
		1	12		23.28	23.38	22.31	0
5M	16QAM	1	24		22.23	23.33	22.29	0
		12	0		22.27	22.39	22.31	1
		12	6		22.25	22.35	22.26	1
		12	13		22.18	22.29	22.19	1
		25	0		22.28	22.33	22.31	1
		1	0		22.72	22.72	22.69	1
5M	64QAM	1	12		22.62	22.65	22.57	1
		1	24		22.59	22.61	22.57	1
		12	0		21.37	21.38	21.33	2
		12	6		21.27	21.36	21.31	2
		12	13		21.28	21.35	21.34	2
		25	0		21.26	21.34	21.24	2
5M	256QAM	1	0		21.57	21.67	21.64	2
		1	12		21.55	21.59	21.52	2
		1	24		21.53	21.53	21.46	2
		12	0		20.33	20.34	20.32	3
		12	6		20.31	20.33	20.26	3
		12	13		20.24	20.29	20.29	3
5M	256QAM	25	0		20.25	20.34	20.25	3
		1	0		18.37	18.45	18.35	5
		1	12		18.38	18.36	18.28	5
		1	24		18.27	18.31	18.21	5
		12	0		18.20	18.16	18.15	5
		12	6		18.25	18.20	18.24	5
5M	256QAM	12	13		18.14	18.14	18.11	5
		25	0		18.32	18.24	18.32	5

LTE Conducted Power (Full)							
LTE Band 14							
BW	MCS Index	RB Size	RB Offset		Mid		3GPP MPR (dB)
		Channel			23330		
		Frequency (MHz)			793		
10M	QPSK	1	0		23.38		0
		1	24		23.33		0
		1	49		23.22		0
		25	0		22.31		1
		25	12		22.28		1
		25	25		22.22		1
10M	16QAM	50	0		22.29		1
		1	0		22.67		1
		1	24		22.54		1
		1	49		22.56		1
		25	0		21.29		2
		25	12		21.28		2
10M	64QAM	25	25		21.26		2
		50	0		21.29		2
		1	0		21.49		2
		1	24		21.47		2
		1	49		21.37		2
		25	0		20.27		3
10M	256QAM	25	12		20.25		3
		25	25		20.24		3
		50	0		20.29		3
		1	0		18.45		5
		1	24		18.35		5
		1	49		18.22		5
BW	MCS Index	Channel		23305	23330	23355	3GPP MPR
		Frequency (MHz)		790.5	793	795.5	
5M	QPSK	1	0	23.36	23.33	23.34	0
		1	12	23.33	23.32	23.26	0
		1	24	23.28	23.27	23.21	0
		12	0	22.43	22.33	22.35	1
		12	6	22.35	22.29	22.29	1
		12	13	22.36	22.28	22.30	1
5M	16QAM	25	0	22.41	22.31	22.33	1
		1	0	22.67	22.63	22.62	1
		1	12	22.69	22.59	22.59	1
		1	24	22.61	22.58	22.60	1
		12	0	21.42	21.35	21.32	2
		12	6	21.36	21.33	21.26	2
5M	64QAM	12	13	21.34	21.26	21.31	2
		25	0	21.38	21.31	21.36	2
		1	0	21.56	21.51	21.55	2
		1	12	21.47	21.46	21.44	2
		1	24	21.51	21.43	21.43	2
		12	0	20.36	20.32	20.30	3
5M	256QAM	12	6	20.37	20.28	20.36	3
		12	13	20.30	20.23	20.23	3
		25	0	20.36	20.27	20.33	3
		1	0	18.35	18.39	18.34	5
		1	12	18.24	18.32	18.15	5
		1	24	18.24	18.29	18.16	5
5M	256QAM	12	0	18.23	18.25	18.14	5
		12	6	18.18	18.21	18.17	5
		12	13	18.10	18.19	18.06	5
		25	0	18.16	18.25	18.10	5

LTE Conducted Power (Full)							
LTE Band 17							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		23780	23790	23800	
		Frequency (MHz)		709	710	711	
10M	QPSK	1	0	23.68	23.78	23.71	0
		1	24	23.61	23.71	23.67	0
		1	49	23.59	23.61	23.60	0
		25	0	22.68	22.78	22.76	1
		25	12	22.63	22.72	22.67	1
		25	25	22.51	22.64	22.60	1
10M	16QAM	50	0	22.64	22.74	22.71	1
		1	0	22.88	22.98	22.91	1
		1	24	22.92	22.97	22.93	1
		1	49	22.84	22.96	22.86	1
		25	0	21.64	21.76	21.66	2
		25	12	21.71	21.72	21.71	2
10M	64QAM	25	25	21.57	21.66	21.60	2
		50	0	21.65	21.71	21.70	2
		1	0	21.89	21.95	21.92	2
		1	24	21.91	21.93	21.91	2
		1	49	21.76	21.81	21.79	2
		25	0	20.56	20.62	20.59	3
10M	256QAM	25	12	20.58	20.69	20.64	3
		25	25	20.56	20.62	20.62	3
		50	0	20.51	20.71	20.61	3
		1	0	18.77	18.88	18.80	5
		1	24	18.70	18.81	18.74	5
		1	49	18.65	18.73	18.68	5
5M	QPSK	25	0	18.46	18.59	18.53	5
		25	12	18.58	18.65	18.61	5
		25	25	18.51	18.61	18.61	5
		50	0	18.52	18.64	18.54	5
		1	0	23.63	23.71	23.61	0
		1	12	23.60	23.68	23.63	0
5M	16QAM	1	24	23.51	23.60	23.56	0
		12	0	22.66	22.69	22.71	1
		12	6	22.59	22.68	22.59	1
		12	13	22.49	22.55	22.50	1
		25	0	22.62	22.71	22.68	1
		1	0	22.83	22.96	22.90	1
5M	64QAM	1	12	22.86	22.87	22.84	1
		1	24	22.74	22.89	22.86	1
		12	0	21.56	21.66	21.63	2
		12	6	21.69	21.64	21.69	2
		12	13	21.50	21.64	21.54	2
		25	0	21.61	21.66	21.70	2
5M	256QAM	1	0	21.84	21.88	21.85	2
		1	12	21.88	21.90	21.88	2
		1	24	21.75	21.74	21.79	2
		12	0	20.51	20.56	20.50	3
		12	6	20.57	20.62	20.62	3
		12	13	20.56	20.59	20.54	3
5M	QPSK	25	0	20.42	20.67	20.54	3
		1	0	18.72	18.86	18.75	5
		1	12	18.68	18.78	18.68	5
		1	24	18.65	18.72	18.62	5
		12	0	18.41	18.57	18.47	5
		12	6	18.56	18.55	18.52	5
5M	16QAM	12	13	18.48	18.58	18.59	5
		25	0	18.43	18.64	18.47	5
		1	0	23.755	23790	23825	3GPP MPR
		Frequency (MHz)		706.5	710	713.5	

LTE Conducted Power (Full)									
LTE Band 25									
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)		
		Channel		26140	26365	26590			
		Frequency (MHz)		1860	1882.5	1905			
20M	QPSK	1	0	23.01	23.08	22.95	0		
		1	50	22.98	23.07	22.92	0		
		1	99	22.94	23.01	22.91	0		
		50	0	22.28	22.31	22.26	1		
		50	25	22.11	22.18	22.03	1		
		50	50	22.14	22.20	22.04	1		
20M	16QAM	100	0	22.21	22.26	22.20	1		
		1	0	22.57	22.59	22.47	1		
		1	50	22.58	22.64	22.58	1		
		1	99	22.41	22.51	22.40	1		
		50	0	21.19	21.25	21.19	2		
		50	25	21.32	21.39	21.24	2		
20M	64QAM	50	50	21.26	21.36	21.23	2		
		100	0	21.21	21.27	21.20	2		
		1	0	21.46	21.48	21.40	2		
		1	50	21.46	21.54	21.38	2		
		1	99	21.35	21.44	21.26	2		
		50	0	20.27	20.29	20.26	3		
20M	256QAM	50	25	20.32	20.42	20.31	3		
		50	50	20.36	20.41	20.35	3		
		100	0	20.29	20.35	20.29	3		
		1	0	18.41	18.48	18.35	5		
		1	50	18.53	18.61	18.44	5		
		1	99	18.43	18.45	18.34	5		
20M	256QAM	50	0	18.31	18.34	18.31	5		
		50	25	18.42	18.51	18.37	5		
		50	50	18.49	18.50	18.47	5		
		100	0	18.30	18.35	18.30	5		
		BW	MCS Index	Channel		26115	26365	26615	3GPP MPR
		Frequency (MHz)		1857.5	1882.5	1907.5			
15M	QPSK	1	0	22.93	23.06	22.93	0		
		1	37	22.93	23.01	22.86	0		
		1	74	22.92	22.98	22.83	0		
		36	0	22.20	22.29	22.20	1		
		36	19	22.04	22.14	21.94	1		
		36	39	22.04	22.17	21.95	1		
15M	16QAM	75	0	22.17	22.23	22.11	1		
		1	0	22.51	22.52	22.43	1		
		1	37	22.54	22.60	22.50	1		
		1	74	22.37	22.46	22.30	1		
		36	0	21.13	21.24	21.17	2		
		36	19	21.26	21.38	21.23	2		
15M	64QAM	36	39	21.18	21.29	21.14	2		
		75	0	21.14	21.24	21.20	2		
		1	0	21.46	21.48	21.35	2		
		1	37	21.40	21.52	21.35	2		
		1	74	21.25	21.44	21.21	2		
		36	0	20.22	20.27	20.17	3		
15M	256QAM	36	19	20.25	20.36	20.28	3		
		36	39	20.26	20.37	20.30	3		
		75	0	20.26	20.35	20.28	3		
		1	0	18.33	18.42	18.33	5		
		1	37	18.45	18.52	18.39	5		
		1	74	18.39	18.38	18.30	5		
15M	256QAM	36	0	18.24	18.30	18.28	5		
		36	19	18.35	18.46	18.35	5		
		36	39	18.42	18.45	18.42	5		
		75	0	18.28	18.33	18.28	5		

LTE Conducted Power (Full)									
LTE Band 25									
BW	MCS Index	Channel		26090	26365	26640	3GPP MPR		
		Frequency (MHz)		1855	1882.5	1910			
10M	QPSK	1	0	22.84	22.90	22.92	0		
		1	24	22.80	23.03	22.84	0		
		1	49	22.75	22.78	22.88	0		
		25	0	22.21	22.29	22.11	1		
		25	12	21.99	22.08	21.83	1		
		25	25	21.99	22.10	21.83	1		
10M	16QAM	50	0	22.11	22.13	22.05	1		
		1	0	22.44	22.42	22.32	1		
		1	24	22.45	22.55	22.49	1		
		1	49	22.33	22.31	22.30	1		
		25	0	21.08	21.17	21.04	2		
		25	12	21.20	21.27	21.14	2		
10M	64QAM	25	25	21.15	21.13	21.12	2		
		50	0	21.17	21.09	21.04	2		
		1	0	21.24	21.34	21.33	2		
		1	24	21.41	21.40	21.35	2		
		1	49	21.18	21.30	21.04	2		
		25	0	20.13	20.07	20.19	3		
10M	256QAM	25	12	20.19	20.34	20.16	3		
		25	25	20.31	20.35	20.17	3		
		50	0	20.28	20.28	20.16	3		
		1	0	18.34	18.38	18.10	5		
		1	24	18.33	18.41	18.36	5		
		1	49	18.39	18.31	18.32	5		
10M	256QAM	25	0	18.19	18.22	18.26	5		
		25	12	18.30	18.46	18.18	5		
		25	25	18.30	18.47	18.31	5		
		50	0	18.20	18.24	18.22	5		
		BW	MCS Index	Channel		26065	26365	26665	3GPP MPR
		Frequency (MHz)		1852.5	1882.5	1912.5			
5M	QPSK	1	0	22.85	22.88	22.68	0		
		1	12	22.88	22.96	22.72	0		
		1	24	22.85	22.90	22.74	0		
		12	0	22.12	22.13	21.96	1		
		12	6	21.99	22.11	21.81	1		
		12	13	22.12	22.07	21.83	1		
5M	16QAM	25	0	22.11	22.26	22.01	1		
		1	0	22.39	22.41	22.31	1		
		1	12	22.58	22.52	22.45	1		
		1	24	22.29	22.44	22.23	1		
		12	0	21.08	21.21	21.13	2		
		12	6	21.10	21.28	21.01	2		
5M	64QAM	12	13	21.09	21.19	21.16	2		
		25	0	21.04	21.15	21.09	2		
		1	0	21.31	21.36	21.20	2		
		1	12	21.26	21.37	21.34	2		
		1	24	21.21	21.30	21.18	2		
		12	0	20.18	20.16	20.09	3		
5M	256QAM	12	6	20.18	20.28	20.19	3		
		12	13	20.34	20.20	20.18	3		
		25	0	20.25	20.34	20.13	3		
		1	0	18.21	18.39	18.11	5		
		1	12	18.37	18.51	18.22	5		
		1	24	18.40	18.40	18.08	5		
5M	256QAM	12	0	18.21	18.25	18.12	5		
		12	6	18.29	18.48	18.16	5		
		12	13	18.30	18.27	18.31	5		
		25	0	18.25	18.13	18.16	5		

LTE Conducted Power (Full)									
LTE Band 25									
BW	MCS Index	Channel		26055	26365	26675	3GPP MPR		
		Frequency (MHz)		1851.5	1882.5	1913.5			
3M	QPSK	1	0	22.90	22.93	22.86	0		
		1	7	22.91	22.88	22.83	0		
		1	14	22.85	22.93	22.83	0		
		8	0	22.18	22.11	22.15	1		
		8	3	21.99	21.95	21.87	1		
		8	7	21.94	22.06	21.94	1		
3M	16QAM	15	0	22.15	22.19	22.15	1		
		1	0	22.40	22.40	22.41	1		
		1	7	22.53	22.54	22.40	1		
		1	14	22.20	22.31	22.29	1		
		8	0	21.00	21.20	20.96	2		
		8	3	21.20	21.23	21.15	2		
3M	64QAM	8	7	21.12	21.22	21.07	2		
		15	0	21.04	21.07	21.09	2		
		1	0	21.44	21.29	21.20	2		
		1	7	21.41	21.36	21.25	2		
		1	14	21.17	21.40	21.06	2		
		8	0	20.22	20.18	20.12	3		
3M	256QAM	8	3	20.17	20.37	20.25	3		
		8	7	20.26	20.33	20.25	3		
		15	0	20.19	20.25	20.21	3		
		1	0	18.26	18.33	18.31	5		
		1	7	18.39	18.45	18.28	5		
		1	14	18.31	18.27	18.27	5		
3M	256QAM	8	0	18.29	18.25	18.14	5		
		8	3	18.39	18.37	18.20	5		
		8	7	18.38	18.41	18.28	5		
		15	0	18.23	18.14	18.19	5		
		BW	MCS Index	Channel		26047	26365	26683	3GPP MPR
				Frequency (MHz)		1850.7	1882.5	1914.3	
1.4M	QPSK	1	0	22.89	22.94	22.80	0		
		1	2	22.80	23.00	22.84	0		
		1	5	22.78	22.77	22.73	0		
		3	0	23.03	23.05	23.02	0		
		3	1	22.95	22.99	22.94	0		
		3	3	23.06	23.05	22.97	0		
1.4M	16QAM	6	0	22.05	22.15	22.05	1		
		1	0	22.56	22.48	22.39	1		
		1	2	22.39	22.55	22.43	1		
		1	5	22.25	22.29	22.40	1		
		3	0	22.15	22.16	22.10	1		
		3	1	22.27	22.19	22.15	1		
1.4M	64QAM	3	3	22.21	22.28	22.14	1		
		6	0	21.01	21.21	21.12	2		
		1	0	21.38	21.47	21.18	2		
		1	2	21.29	21.33	21.23	2		
		1	5	21.28	21.27	21.11	2		
		3	0	21.16	21.25	21.12	2		
1.4M	256QAM	3	1	21.18	21.23	21.25	2		
		3	3	21.23	21.32	21.23	2		
		6	0	20.17	20.26	20.14	3		
		1	0	18.33	18.39	18.26	5		
		1	2	18.43	18.47	18.28	5		
		1	5	18.27	18.29	18.13	5		
1.4M	256QAM	3	0	18.27	18.25	18.16	5		
		3	1	18.23	18.42	18.33	5		
		3	3	18.41	18.31	18.31	5		
		6	0	18.09	18.18	18.08	5		

LTE Conducted Power (Full)							
LTE Band 26							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		26765	26865	26965	
		Frequency (MHz)		821.5	831.5	841.5	
15M	QPSK	1	0	23.11	23.36	23.32	0
		1	37	23.08	23.31	23.23	0
		1	74	23.02	23.24	23.16	0
		36	0	22.19	22.35	22.29	1
		36	19	22.21	22.31	22.21	1
		36	39	22.13	22.24	22.17	1
15M	16QAM	75	0	22.15	22.29	22.22	1
		1	0	22.73	22.78	22.73	1
		1	37	22.55	22.66	22.65	1
		1	74	22.52	22.58	22.56	1
		36	0	21.28	21.36	21.33	2
		36	19	21.17	21.26	21.18	2
15M	64QAM	36	39	21.14	21.21	21.18	2
		75	0	21.13	21.27	21.17	2
		1	0	21.44	21.53	21.47	2
		1	37	21.38	21.49	21.46	2
		1	74	21.40	21.45	21.42	2
		36	0	20.28	20.38	20.28	3
15M	256QAM	36	19	20.23	20.35	20.31	3
		36	39	20.25	20.31	20.26	3
		75	0	20.17	20.28	20.26	3
		1	0	18.10	18.47	18.35	5
		1	37	18.39	18.42	18.29	5
		1	74	18.25	18.33	18.16	5
10M	QPSK	36	0	18.18	18.28	18.11	5
		36	19	18.15	18.24	18.14	5
		36	39	18.11	18.21	18.08	5
		75	0	18.17	18.23	18.15	5
		1	0	23.08	23.34	23.30	0
		1	24	23.02	23.27	23.17	0
10M	16QAM	1	49	22.99	23.20	23.12	0
		25	0	22.16	22.24	22.29	1
		25	12	22.11	22.27	22.14	1
		25	25	22.03	22.15	22.17	1
		50	0	22.05	22.21	22.19	1
		1	0	22.64	22.69	22.66	1
10M	64QAM	1	24	22.46	22.66	22.58	1
		1	49	22.44	22.58	22.46	1
		25	0	21.27	21.26	21.25	2
		25	12	21.10	21.16	21.16	2
		25	25	21.04	21.20	21.14	2
		50	0	21.09	21.25	21.13	2
10M	256QAM	1	0	21.43	21.46	21.47	2
		1	24	21.30	21.46	21.44	2
		1	49	21.30	21.39	21.39	2
		25	0	20.21	20.28	20.21	3
		25	12	20.15	20.27	20.23	3
		25	25	20.23	20.23	20.18	3
10M	QPSK	50	0	20.10	20.24	20.24	3
		1	0	18.38	18.38	18.30	5
		1	24	18.37	18.32	18.24	5
		1	49	18.22	18.26	18.09	5
		25	0	18.09	18.24	18.08	5
		25	12	18.06	18.19	18.04	5
10M	16QAM	25	25	18.09	18.20	18.05	5
		50	0	18.14	18.21	18.09	5

LTE Conducted Power (Full)							
LTE Band 26							
BW	MCS Index	Channel		26715	26865	27015	3GPP MPR
		Frequency (MHz)		816.5	831.5	846.5	
5M	QPSK	1	0	22.95	23.14	23.20	0
		1	12	22.99	23.22	23.12	0
		1	24	22.82	23.14	23.00	0
		12	0	22.11	22.29	22.21	1
		12	6	22.11	22.11	21.99	1
		12	13	22.06	22.21	21.94	1
5M	16QAM	25	0	22.05	22.12	21.98	1
		1	0	22.49	22.64	22.63	1
		1	12	22.49	22.57	22.44	1
		1	24	22.33	22.43	22.47	1
		12	0	21.24	21.25	21.21	2
		12	6	21.11	21.14	21.02	2
5M	64QAM	12	13	20.99	21.19	21.08	2
		25	0	21.04	21.24	21.05	2
		1	0	21.28	21.40	21.32	2
		1	12	21.27	21.33	21.29	2
		1	24	21.23	21.34	21.36	2
		12	0	20.19	20.37	20.16	3
5M	256QAM	12	6	20.10	20.19	20.16	3
		12	13	20.19	20.17	20.16	3
		25	0	19.94	20.18	20.11	3
		1	0	18.24	18.41	18.12	5
		1	12	18.16	18.29	18.08	5
		1	24	18.03	18.17	18.02	5
BW	MCS Index	Channel		26705	26865	27025	3GPP MPR
		Frequency (MHz)		815.5	831.5	847.5	
3M	QPSK	12	0	22.99	23.15	23.21	0
		1	7	22.96	23.28	23.02	0
		1	14	22.92	23.05	22.93	0
		8	0	22.08	22.19	22.15	1
		8	3	22.06	22.27	22.09	1
		8	7	22.03	22.13	21.94	1
3M	16QAM	15	0	22.08	22.13	22.06	1
		1	0	22.57	22.54	22.60	1
		1	7	22.46	22.56	22.43	1
		1	14	22.49	22.40	22.44	1
		8	0	21.13	21.11	21.29	2
		8	3	21.13	21.25	21.14	2
3M	64QAM	8	7	21.04	20.96	21.03	2
		15	0	21.01	21.17	21.00	2
		1	0	21.30	21.32	21.23	2
		1	7	21.27	21.31	21.39	2
		1	14	21.21	21.38	21.37	2
		8	0	20.06	20.19	20.09	3
3M	256QAM	8	3	20.13	20.26	20.19	3
		8	7	20.05	20.17	20.10	3
		15	0	20.04	20.04	20.17	3
		1	0	18.34	18.28	18.19	5
		1	7	18.32	18.20	18.09	5
		1	14	18.02	18.30	18.08	5
3M	256QAM	8	0	18.05	18.19	17.94	5
		8	3	18.05	18.04	17.99	5
		8	7	17.94	18.08	18.07	5
		15	0	17.97	18.11	18.00	5

LTE Conducted Power (Full)							
LTE Band 26							
BW	MCS Index	Channel		26697	26865	27033	3GPP MPR
		Frequency (MHz)		814.7	831.5	848.3	
1.4M	QPSK	1	0	23.08	23.32	23.08	0
		1	2	23.00	23.29	23.16	0
		1	5	22.99	23.09	23.01	0
		3	0	23.09	23.23	23.09	0
		3	1	23.03	23.27	23.05	0
		3	3	23.06	23.02	23.02	0
1.4M	16QAM	6	0	21.93	22.15	22.13	1
		1	0	22.67	22.57	22.62	1
		1	2	22.41	22.64	22.53	1
		1	5	22.39	22.50	22.41	1
		3	0	22.25	22.34	22.15	1
		3	1	22.12	22.05	22.08	1
1.4M	64QAM	3	3	22.03	21.99	22.02	1
		6	0	20.94	21.17	21.07	2
		1	0	21.36	21.33	21.28	2
		1	2	21.24	21.36	21.33	2
		1	5	21.21	21.36	21.31	2
		3	0	21.11	21.25	21.05	2
1.4M	256QAM	3	1	21.17	21.25	21.28	2
		3	3	21.11	21.18	21.11	2
		6	0	20.06	20.15	20.07	3
		1	0	18.26	18.38	18.22	5
		1	2	18.33	18.34	18.14	5
		1	5	18.12	18.26	18.01	5
1.4M	256QAM	3	0	18.04	18.08	18.01	5
		3	1	17.98	18.02	17.98	5
		3	3	18.04	18.00	18.01	5
		6	0	18.13	18.18	18.01	5

LTE Conducted Power (Full)							
LTE Band 30							
BW	MCS Index	RB Size	RB Offset		Mid		3GPP MPR (dB)
		Channel			27710		
		Frequency (MHz)			2310		
10M	QPSK	1	0		23.22		0
		1	24		23.18		0
		1	49		23.15		0
		25	0		22.21		1
		25	12		22.17		1
		25	25		22.02		1
10M	16QAM	50	0		22.15		1
		1	0		22.33		1
		1	24		22.31		1
		1	49		22.28		1
		25	0		21.19		2
		25	12		21.18		2
10M	64QAM	25	25		21.08		2
		50	0		21.13		2
		1	0		21.35		2
		1	24		21.22		2
		1	49		21.21		2
		25	0		20.13		3
10M	256QAM	25	12		20.18		3
		25	25		20.08		3
		50	0		20.02		3
		1	0		18.13		5
		1	24		18.15		5
		1	49		18.12		5
BW	MCS Index	Channel		27685	27710	27735	3GPP MPR
		Frequency (MHz)		2307.5	2310	2312.5	
		5M	QPSK	1	0	23.18	
1	12	23.08		23.17	23.04	0	
1	24	23.02		23.02	23.02	0	
12	0	22.10		22.13	22.02	1	
12	6	21.94		22.04	21.90	1	
12	13	21.91		21.94	21.86	1	
5M	16QAM	25	0	22.04	22.08	22.04	1
		1	0	22.18	22.20	22.15	1
		1	12	22.10	22.16	22.08	1
		1	24	22.13	22.19	22.12	1
		12	0	21.05	21.08	21.03	2
		12	6	20.92	21.00	20.88	2
5M	64QAM	12	13	21.01	21.04	20.98	2
		25	0	21.03	21.06	20.99	2
		1	0	21.22	21.30	21.15	2
		1	12	21.13	21.21	21.10	2
		1	24	21.08	21.14	21.01	2
		12	0	20.01	20.01	19.92	3
5M	256QAM	12	6	19.99	20.04	19.97	3
		12	13	19.90	19.93	19.85	3
		25	0	19.95	19.98	19.85	3
		1	0	18.02	18.03	18.09	5
		1	12	18.09	18.15	18.06	5
		1	24	18.04	18.05	18.04	5
5M	256QAM	12	0	17.93	18.00	17.96	5
		12	6	18.01	18.06	18.04	5
		12	13	17.93	17.90	17.88	5
		25	0	17.88	17.97	17.81	5

LTE Conducted Power (Full)									
LTE Band 38									
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)		
		Channel		37850	38000	38150			
		Frequency (MHz)		2580	2595	2610			
20M	QPSK	1	0	23.51	23.57	23.61	0		
		1	50	23.47	23.53	23.58	0		
		1	99	23.45	23.45	23.48	0		
		50	0	22.59	22.62	22.67	1		
		50	25	22.54	22.59	22.65	1		
		50	50	22.48	22.57	22.58	1		
20M	16QAM	100	0	22.49	22.54	22.59	1		
		1	0	22.52	22.57	22.62	1		
		1	50	22.45	22.46	22.47	1		
		1	99	22.43	22.49	22.58	1		
		50	0	21.61	21.63	21.71	2		
		50	25	21.53	21.62	21.72	2		
20M	64QAM	50	50	21.57	21.57	21.59	2		
		100	0	21.53	21.58	21.68	2		
		1	0	21.13	21.22	21.28	2		
		1	50	21.15	21.17	21.27	2		
		1	99	21.08	21.11	21.15	2		
		50	0	20.55	20.62	20.65	3		
20M	256QAM	50	25	20.58	20.61	20.64	3		
		50	50	20.51	20.56	20.57	3		
		100	0	20.44	20.53	20.58	3		
		1	0	18.36	18.37	18.26	5		
		1	50	18.31	18.34	18.25	5		
		1	99	18.16	18.24	18.12	5		
20M	256QAM	50	0	18.52	18.58	18.42	5		
		50	25	18.56	18.57	18.54	5		
		50	50	18.52	18.55	18.47	5		
		100	0	18.43	18.51	18.36	5		
		BW	MCS Index	Channel		37825	38000	38175	3GPP MPR
		Frequency (MHz)		2577.5	2595	2612.5			
15M	QPSK	1	0	23.43	23.51	23.56	0		
		1	37	23.47	23.51	23.50	0		
		1	74	23.40	23.38	23.43	0		
		36	0	22.57	22.53	22.57	1		
		36	19	22.51	22.55	22.64	1		
		36	39	22.43	22.56	22.50	1		
15M	16QAM	75	0	22.41	22.50	22.55	1		
		1	0	22.49	22.51	22.55	1		
		1	37	22.40	22.45	22.43	1		
		1	74	22.36	22.39	22.51	1		
		36	0	21.57	21.60	21.71	2		
		36	19	21.51	21.53	21.68	2		
15M	64QAM	36	39	21.57	21.49	21.56	2		
		75	0	21.45	21.57	21.65	2		
		1	0	21.11	21.16	21.18	2		
		1	37	21.09	21.10	21.26	2		
		1	74	21.02	21.10	21.08	2		
		36	0	20.50	20.53	20.65	3		
15M	256QAM	36	19	20.51	20.57	20.64	3		
		36	39	20.45	20.49	20.57	3		
		75	0	20.42	20.46	20.55	3		
		1	0	18.28	18.32	18.20	5		
		1	37	18.26	18.34	18.19	5		
		1	74	18.12	18.21	18.12	5		
15M	256QAM	36	0	18.51	18.52	18.32	5		
		36	19	18.54	18.55	18.44	5		
		36	39	18.44	18.46	18.43	5		
		75	0	18.37	18.46	18.34	5		

LTE Conducted Power (Full)									
LTE Band 38									
BW	MCS Index	Channel		37800	38000	38200	3GPP MPR		
		Frequency (MHz)		2575	2595	2615			
10M	QPSK	1	0	23.29	23.48	23.44	0		
		1	24	23.40	23.42	23.44	0		
		1	49	23.33	23.23	23.43	0		
		25	0	22.51	22.52	22.60	1		
		25	12	22.45	22.59	22.51	1		
		25	25	22.30	22.52	22.51	1		
10M	16QAM	50	0	22.45	22.44	22.48	1		
		1	0	22.44	22.38	22.51	1		
		1	24	22.45	22.35	22.44	1		
		1	49	22.27	22.39	22.43	1		
		25	0	21.37	21.56	21.63	2		
		25	12	21.29	21.52	21.61	2		
10M	64QAM	25	25	21.37	21.42	21.52	2		
		50	0	21.43	21.57	21.47	2		
		1	0	21.01	21.00	21.15	2		
		1	24	20.99	20.96	21.03	2		
		1	49	20.91	20.90	20.97	2		
		25	0	20.37	20.54	20.55	3		
10M	256QAM	25	12	20.36	20.51	20.55	3		
		25	25	20.42	20.45	20.47	3		
		50	0	20.24	20.45	20.42	3		
		1	0	18.28	18.21	18.17	5		
		1	24	18.18	18.22	18.14	5		
		1	49	18.06	18.02	18.01	5		
10M	256QAM	25	0	18.36	18.44	18.35	5		
		25	12	18.54	18.46	18.42	5		
		25	25	18.31	18.44	18.31	5		
		50	0	18.37	18.41	18.27	5		
		BW	MCS Index	Channel		37775	38000	38225	3GPP MPR
		Frequency (MHz)		2572.5	2595	2617.5			
5M	QPSK	1	0	23.43	23.41	23.31	0		
		1	12	23.33	23.45	23.31	0		
		1	24	23.24	23.25	23.21	0		
		12	0	22.50	22.52	22.49	1		
		12	6	22.45	22.39	22.45	1		
		12	13	22.36	22.39	22.21	1		
5M	16QAM	25	0	22.43	22.51	22.39	1		
		1	0	22.33	22.36	22.56	1		
		1	12	22.37	22.35	22.39	1		
		1	24	22.34	22.46	22.52	1		
		12	0	21.45	21.46	21.54	2		
		12	6	21.45	21.56	21.65	2		
5M	64QAM	12	13	21.43	21.42	21.52	2		
		25	0	21.49	21.44	21.53	2		
		1	0	21.08	21.15	21.18	2		
		1	12	21.01	21.00	21.07	2		
		1	24	21.05	20.91	20.93	2		
		12	0	20.53	20.50	20.53	3		
5M	256QAM	12	6	20.42	20.45	20.47	3		
		12	13	20.35	20.52	20.48	3		
		25	0	20.22	20.40	20.49	3		
		1	0	18.19	18.28	18.03	5		
		1	12	18.26	18.16	18.04	5		
		1	24	18.01	18.01	17.79	5		
5M	256QAM	12	0	18.29	18.52	18.25	5		
		12	6	18.47	18.35	18.21	5		
		12	13	18.39	18.54	18.18	5		
		25	0	18.24	18.45	18.19	5		

LTE Conducted Power (Full)							
LTE Band 40							
BW	MCS Index	RB Size	RB Offset	Low	Mid	Mid	3GPP MPR (dB)
		Channel		38750	39150	39550	
		Frequency (MHz)		2310	2350	2390	
20M	QPSK	1	0	23.57	23.59	23.40	0
		1	50	23.45	23.54	23.38	0
		1	99	23.49	23.53	23.33	0
		50	0	22.69	22.73	22.61	1
		50	25	22.58	22.63	22.56	1
		100	0	22.59	22.61	22.58	1
20M	16QAM	1	0	22.51	22.59	22.41	1
		1	50	22.50	22.51	22.40	1
		1	99	22.42	22.52	22.39	1
		50	0	21.47	21.52	21.39	2
		50	25	21.59	21.65	21.57	2
		100	0	21.58	21.59	21.57	2
20M	64QAM	1	0	21.28	21.28	21.26	2
		1	50	21.14	21.18	21.06	2
		1	99	21.23	21.23	21.20	2
		50	0	20.49	20.54	20.48	3
		50	25	20.65	20.65	20.62	3
		100	0	20.54	20.56	20.44	3
20M	256QAM	1	0	18.40	18.45	18.37	5
		1	50	18.32	18.35	18.25	5
		1	99	18.32	18.42	18.25	5
		50	0	18.42	18.52	18.34	5
		50	25	18.60	18.65	18.58	5
		100	0	18.64	18.73	18.55	5
BW	MCS Index	Channel		38725	39150	39575	3GPP MPR
		Frequency (MHz)		2307.5	2350	2392.5	
15M	QPSK	1	0	23.47	23.58	23.34	0
		1	37	23.42	23.51	23.29	0
		1	74	23.42	23.49	23.24	0
		36	0	22.61	22.69	22.58	1
		36	19	22.50	22.55	22.50	1
		36	39	22.48	22.56	22.47	1
15M	16QAM	75	0	22.49	22.52	22.55	1
		1	0	22.49	22.50	22.31	1
		1	37	22.50	22.44	22.39	1
		1	74	22.33	22.47	22.36	1
		36	0	21.39	21.45	21.30	2
		36	19	21.58	21.57	21.48	2
15M	64QAM	36	39	21.64	21.74	21.67	2
		75	0	21.48	21.58	21.51	2
		1	0	21.23	21.23	21.24	2
		1	37	21.07	21.14	20.97	2
		1	74	21.15	21.13	21.20	2
		36	0	20.42	20.46	20.39	3
15M	256QAM	36	19	20.55	20.55	20.54	3
		36	39	20.65	20.71	20.57	3
		75	0	20.52	20.49	20.44	3
		1	0	18.37	18.37	18.34	5
		1	37	18.25	18.29	18.20	5
		1	74	18.25	18.36	18.17	5
15M	256QAM	36	0	18.33	18.48	18.26	5
		36	19	18.52	18.55	18.51	5
		36	39	18.58	18.69	18.53	5
		75	0	18.43	18.51	18.32	5

LTE Conducted Power (Full)									
LTE Band 40									
BW	MCS Index	Channel		38700	39150	39600	3GPP MPR		
		Frequency (MHz)		2305	2350	2395			
10M	QPSK	1	0	23.41	23.44	23.25	0		
		1	24	23.41	23.33	23.20	0		
		1	49	23.37	23.35	23.27	0		
		25	0	22.55	22.53	22.46	1		
		25	12	22.41	22.53	22.44	1		
		25	25	22.38	22.38	22.41	1		
10M	16QAM	50	0	22.53	22.37	22.33	1		
		1	0	22.33	22.41	22.19	1		
		1	24	22.37	22.44	22.19	1		
		1	49	22.30	22.39	22.26	1		
		25	0	21.38	21.35	21.25	2		
		25	12	21.39	21.50	21.47	2		
10M	64QAM	25	25	21.58	21.68	21.58	2		
		50	0	21.42	21.53	21.39	2		
		1	0	21.14	21.17	21.05	2		
		1	24	21.10	20.94	20.95	2		
		1	49	21.13	21.01	21.09	2		
		25	0	20.36	20.36	20.28	3		
10M	256QAM	25	12	20.49	20.54	20.50	3		
		25	25	20.58	20.46	20.42	3		
		50	0	20.48	20.54	20.37	3		
		1	0	18.32	18.32	18.21	5		
		1	24	18.25	18.18	18.07	5		
		1	49	18.08	18.36	18.09	5		
10M	256QAM	25	0	18.32	18.49	18.25	5		
		25	12	18.42	18.50	18.48	5		
		25	25	18.47	18.59	18.45	5		
		50	0	18.40	18.50	18.23	5		
		BW	MCS Index	Channel		38675	39150	39625	3GPP MPR
				Frequency (MHz)		2302.5	2350	2397.5	
5M	QPSK	1	0	23.52	23.50	23.20	0		
		1	12	23.30	23.42	23.13	0		
		1	24	23.44	23.39	23.15	0		
		12	0	22.54	22.65	22.46	1		
		12	6	22.44	22.47	22.20	1		
		12	13	22.52	22.39	22.27	1		
5M	16QAM	25	0	22.46	22.49	22.48	1		
		1	0	22.36	22.52	22.25	1		
		1	12	22.42	22.38	22.20	1		
		1	24	22.25	22.38	22.34	1		
		12	0	21.32	21.30	21.24	2		
		12	6	21.45	21.58	21.44	2		
5M	64QAM	12	13	21.58	21.57	21.44	2		
		25	0	21.50	21.47	21.43	2		
		1	0	21.26	21.20	21.17	2		
		1	12	21.08	21.07	20.93	2		
		1	24	21.05	21.06	21.09	2		
		12	0	20.42	20.39	20.28	3		
5M	256QAM	12	6	20.46	20.48	20.43	3		
		12	13	20.43	20.63	20.53	3		
		25	0	20.43	20.51	20.22	3		
		1	0	18.31	18.39	18.12	5		
		1	12	18.21	18.27	18.01	5		
		1	24	18.19	18.36	18.12	5		
5M	256QAM	12	0	18.35	18.38	18.30	5		
		12	6	18.57	18.46	18.37	5		
		12	13	18.54	18.60	18.26	5		
		25	0	18.32	18.52	18.30	5		

LTE Conducted Power (Full)									
LTE Band 41 PC2									
BW	MCS Index	RB Size	RB Offset	Low	Mid	Mid	Mid	High	3GPP MPR (dB)
		Channel		39750	40185	40620	41055	41490	
		Frequency (MHz)		2506	2549.5	2593	2636.5	2680	
20M	QPSK	1	0	26.96	26.62	26.99	26.87	26.43	0
		1	50	26.87	26.60	26.96	26.74	26.35	0
		1	99	26.88	26.58	26.88	26.79	26.33	0
		50	0	25.93	25.81	25.98	25.87	25.45	1
		50	25	25.90	25.78	25.96	25.82	25.41	1
		50	50	25.91	25.67	25.95	25.75	25.40	1
20M	16QAM	100	0	25.83	25.59	25.91	25.65	25.38	1
		1	0	25.96	25.79	25.98	25.85	25.42	1
		1	50	25.91	25.72	25.96	25.76	25.39	1
		1	99	25.81	25.65	25.91	25.69	25.35	1
		50	0	24.88	24.71	24.96	24.76	24.38	2
		50	25	24.89	24.76	24.93	24.80	24.36	2
20M	64QAM	50	50	24.83	24.59	24.91	24.69	24.33	2
		100	0	24.86	24.57	24.95	24.67	24.35	2
		1	0	24.91	24.73	24.97	24.83	24.41	2
		1	50	24.95	24.76	24.95	24.77	24.37	2
		1	99	24.81	24.72	24.89	24.72	24.35	2
		50	0	23.90	23.78	23.96	23.84	23.46	3
20M	256QAM	50	25	23.84	23.73	23.94	23.75	23.44	3
		50	50	23.84	23.69	23.90	23.75	23.41	3
		100	0	23.90	23.76	23.92	23.78	23.40	3
		1	0	21.95	21.78	21.98	21.86	21.36	5
		1	50	21.87	21.74	21.96	21.78	21.37	5
		1	99	21.81	21.69	21.89	21.76	21.30	5
20M	256QAM	50	0	21.91	21.79	21.91	21.85	21.37	5
		50	25	21.88	21.72	21.88	21.80	21.31	5
		50	50	21.81	21.74	21.85	21.76	21.35	5
		100	0	21.81	21.70	21.90	21.71	21.35	5
		Channel	39725	40173	40620	41068	41515	3GPP MPR	
		Frequency (MHz)	2503.5	2548.3	2593	2637.8	2682.5		
15M	QPSK	1	0	26.92	26.62	26.96	26.81	26.38	0
		1	37	26.85	26.54	26.90	26.68	26.31	0
		1	74	26.85	26.53	26.80	26.73	26.28	0
		36	0	25.85	25.76	25.91	25.85	25.38	1
		36	19	25.84	25.76	25.90	25.81	25.33	1
		36	39	25.90	25.57	25.85	25.74	25.40	1
15M	16QAM	75	0	25.76	25.54	25.91	25.58	25.38	1
		1	0	25.95	25.77	25.94	25.84	25.34	1
		1	37	25.83	25.65	25.93	25.68	25.27	1
		1	74	25.78	25.61	25.85	25.64	25.28	1
		36	0	24.88	24.71	24.92	24.76	24.36	2
		36	19	24.83	24.68	24.83	24.70	24.38	2
15M	64QAM	36	39	24.75	24.52	24.82	24.62	24.35	2
		75	0	24.80	24.50	24.86	24.60	24.28	2
		1	0	24.83	24.65	24.90	24.83	24.38	2
		1	37	24.92	24.73	24.86	24.67	24.29	2
		1	74	24.73	24.69	24.79	24.67	24.27	2
		36	0	23.89	23.78	23.88	23.75	23.36	3
15M	256QAM	36	19	23.83	23.68	23.93	23.68	23.38	3
		36	39	23.77	23.61	23.81	23.66	23.33	3
		75	0	23.90	23.73	23.86	23.76	23.38	3
		1	0	21.91	21.77	21.95	21.80	21.32	5
		1	37	21.84	21.72	21.96	21.74	21.36	5
		1	74	21.79	21.61	21.84	21.71	21.20	5
15M	256QAM	36	0	21.81	21.72	21.89	21.76	21.29	5
		36	19	21.81	21.62	21.80	21.74	21.25	5
		36	39	21.72	21.70	21.83	21.70	21.31	5
		75	0	21.71	21.68	21.81	21.62	21.40	5

LTE Conducted Power (Full)									
LTE Band 41 PC2									
BW	MCS Index	Channel		39700	40160	40620	41080	41540	3GPP MPR
		Frequency (MHz)		2501	2547	2593	2639	2685	
10M	QPSK	1	0	26.91	26.53	26.92	26.80	26.43	0
		1	24	26.80	26.50	26.96	26.69	26.29	0
		1	49	26.85	26.56	26.87	26.76	26.23	0
		25	0	25.89	25.74	25.98	25.87	25.44	1
		25	12	25.89	25.69	25.88	25.74	25.41	1
		25	25	25.91	25.59	25.94	25.65	25.30	1
10M	16QAM	50	0	25.77	25.57	25.87	25.62	25.36	1
		1	0	25.96	25.69	25.98	25.76	25.41	1
		1	24	25.81	25.66	25.88	25.75	25.32	1
		1	49	25.77	25.58	25.90	25.60	25.32	1
		25	0	24.86	24.63	24.95	24.76	24.43	2
		25	12	24.88	24.68	24.90	24.75	24.40	2
10M	64QAM	25	25	24.79	24.52	24.88	24.59	24.34	2
		50	0	24.85	24.48	24.93	24.58	24.32	2
		1	0	24.84	24.67	24.88	24.74	24.36	2
		1	24	24.86	24.68	24.85	24.77	24.27	2
		1	49	24.75	24.64	24.83	24.68	24.30	2
		25	0	23.80	23.76	23.87	23.78	23.42	3
10M	256QAM	25	12	23.76	23.66	23.94	23.70	23.39	3
		25	25	23.76	23.64	23.87	23.72	23.34	3
		50	0	23.86	23.67	23.89	23.78	23.34	3
		1	0	21.92	21.73	21.96	21.77	21.32	5
		1	24	21.79	21.73	21.88	21.69	21.33	5
		1	49	21.73	21.61	21.83	21.76	21.24	5
5M	QPSK	25	0	21.87	21.72	21.88	21.77	21.35	5
		25	12	21.87	21.64	21.86	21.76	21.22	5
		25	25	21.80	21.65	21.81	21.71	21.25	5
		50	0	21.75	21.65	21.80	21.70	21.38	5
		Channel		39675	40148	40620	41093	41565	3GPP MPR
		Frequency (MHz)		2498.5	2545.8	2593	2640.3	2687.5	
5M	QPSK	1	0	26.92	26.59	26.95	26.77	26.33	0
		1	12	26.79	26.58	26.95	26.67	26.35	0
		1	24	26.86	26.49	26.83	26.79	26.29	0
		12	0	25.83	25.71	25.90	25.82	25.43	1
		12	6	25.87	25.68	25.86	25.72	25.37	1
		12	13	25.91	25.62	25.87	25.67	25.34	1
5M	16QAM	25	0	25.76	25.55	25.87	25.60	25.37	1
		1	0	25.96	25.73	25.88	25.83	25.35	1
		1	12	25.91	25.71	25.86	25.76	25.28	1
		1	24	25.76	25.64	25.91	25.66	25.32	1
		12	0	24.80	24.68	24.94	24.67	24.39	2
		12	6	24.89	24.75	24.88	24.78	24.38	2
5M	64QAM	12	13	24.76	24.51	24.82	24.69	24.31	2
		25	0	24.83	24.47	24.89	24.65	24.33	2
		1	0	24.83	24.65	24.89	24.82	24.38	2
		1	12	24.91	24.66	24.86	24.68	24.29	2
		1	24	24.81	24.66	24.81	24.63	24.29	2
		12	0	23.80	23.74	23.89	23.74	23.42	3
5M	256QAM	12	6	23.77	23.69	23.85	23.73	23.41	3
		12	13	23.75	23.59	23.88	23.66	23.36	3
		25	0	23.87	23.74	23.87	23.77	23.31	3
		1	0	21.87	21.74	21.98	21.84	21.33	5
		1	12	21.77	21.68	21.93	21.73	21.27	5
		1	24	21.74	21.64	21.86	21.75	21.21	5
5M	256QAM	12	0	21.88	21.73	21.83	21.79	21.28	5
		12	6	21.79	21.70	21.81	21.73	21.29	5
		12	13	21.78	21.72	21.76	21.72	21.34	5
		25	0	21.79	21.61	21.80	21.66	21.32	5

LTE Conducted Power (Full)									
LTE Band 41 PC3									
BW	MCS Index	RB Size	RB Offset	Low	Mid	Mid	Mid	High	3GPP MPR (dB)
		Channel		39750	40185	40620	41055	41490	
		Frequency (MHz)		2506	2549.5	2593	2636.5	2680	
20M	QPSK	1	0	23.85	23.63	23.95	23.73	23.62	0
		1	50	23.83	23.62	23.92	23.70	23.58	0
		1	99	23.80	23.53	23.89	23.63	23.49	0
		50	0	22.96	22.81	22.98	22.84	22.79	1
		50	25	22.94	22.75	22.95	22.84	22.67	1
		100	0	22.93	22.77	22.96	22.79	22.75	1
20M	16QAM	1	0	22.95	22.67	22.98	22.74	22.59	1
		1	50	22.85	22.70	22.95	22.66	22.57	1
		1	99	22.88	22.57	22.97	22.70	22.49	1
		50	0	21.89	21.74	21.95	21.86	21.74	2
		50	25	21.93	21.79	21.92	21.79	21.65	2
		100	0	21.96	21.79	21.99	21.89	21.70	2
20M	64QAM	1	0	21.92	21.65	21.72	21.75	21.60	2
		1	50	21.87	21.67	21.69	21.69	21.57	2
		1	99	21.83	21.63	21.59	21.66	21.50	2
		50	0	20.97	20.82	20.98	20.77	20.74	3
		50	25	20.89	20.78	20.91	20.82	20.66	3
		100	0	20.93	20.70	20.99	20.89	20.76	3
20M	256QAM	1	0	18.95	18.60	18.79	18.66	18.50	5
		1	50	18.80	18.70	18.85	18.63	18.50	5
		1	99	18.79	18.57	18.68	18.64	18.41	5
		50	0	18.85	18.66	18.88	18.84	18.69	5
		50	25	18.88	18.78	18.85	18.73	18.57	5
		100	0	18.75	18.66	18.82	18.63	18.68	5
BW	MCS Index	Channel		39725	40173	40620	41068	41515	3GPP MPR
		Frequency (MHz)		2503.5	2548.3	2593	2637.8	2682.5	
15M	QPSK	1	0	23.83	23.61	23.94	23.64	23.57	0
		1	37	23.74	23.55	23.89	23.70	23.53	0
		1	74	23.77	23.50	23.83	23.61	23.44	0
		36	0	22.89	22.79	22.97	22.75	22.72	1
		36	19	22.85	22.65	22.89	22.83	22.60	1
		36	39	22.78	22.67	22.86	22.63	22.68	1
15M	16QAM	75	0	22.90	22.77	22.88	22.72	22.68	1
		1	0	22.76	22.61	22.86	22.70	22.55	1
		1	37	22.81	22.61	22.88	22.63	22.53	1
		1	74	22.78	22.44	22.89	22.56	22.43	1
		36	0	21.89	21.75	21.92	21.75	21.75	2
		36	19	21.89	21.72	21.90	21.84	21.63	2
15M	64QAM	36	39	21.83	21.69	21.89	21.61	21.63	2
		75	0	21.90	21.77	21.92	21.78	21.66	2
		1	0	21.84	21.53	21.85	21.64	21.59	2
		1	37	21.81	21.56	21.90	21.65	21.55	2
		1	74	21.79	21.47	21.82	21.55	21.47	2
		36	0	20.86	20.80	20.93	20.79	20.72	3
15M	256QAM	36	19	20.87	20.73	20.87	20.79	20.57	3
		36	39	20.81	20.62	20.81	20.62	20.65	3
		75	0	20.91	20.70	20.95	20.79	20.67	3
		1	0	18.92	18.64	18.93	18.68	18.59	5
		1	37	18.81	18.70	18.94	18.65	18.54	5
		1	74	18.83	18.57	18.87	18.68	18.48	5
15M	256QAM	36	0	18.83	18.72	18.92	18.79	18.74	5
		36	19	18.85	18.69	18.90	18.72	18.57	5
		36	39	18.74	18.58	18.78	18.66	18.71	5
		75	0	18.95	18.74	18.93	18.88	18.64	5
		75	0	18.95	18.74	18.93	18.88	18.64	5

LTE Conducted Power (Full)									
LTE Band 41 PC3									
BW	MCS Index	Channel		39700	40160	40620	41080	41540	3GPP MPR
		Frequency (MHz)		2501	2547	2593	2639	2685	
10M	QPSK	1	0	23.83	23.62	23.86	23.68	23.61	0
		1	24	23.74	23.60	23.90	23.70	23.51	0
		1	49	23.77	23.44	23.84	23.60	23.48	0
		25	0	22.96	22.77	22.95	22.74	22.69	1
		25	12	22.94	22.66	22.91	22.79	22.58	1
		50	0	22.86	22.72	22.93	22.70	22.66	1
10M	16QAM	1	0	22.83	22.56	22.87	22.69	22.54	1
		1	24	22.75	22.61	22.92	22.66	22.52	1
		1	49	22.74	22.52	22.88	22.63	22.45	1
		25	0	21.86	21.76	21.93	21.83	21.77	2
		25	12	21.94	21.67	21.87	21.83	21.59	2
		50	0	21.89	21.71	21.87	21.75	21.66	2
10M	64QAM	1	0	21.78	21.62	21.91	21.68	21.55	2
		1	24	21.76	21.52	21.84	21.64	21.52	2
		1	49	21.76	21.47	21.86	21.60	21.45	2
		25	0	20.96	20.78	20.95	20.76	20.75	3
		25	12	20.84	20.75	20.87	20.76	20.57	3
		50	0	20.89	20.73	20.90	20.74	20.75	3
10M	256QAM	1	0	18.88	18.67	18.91	18.71	18.57	5
		1	24	18.85	18.61	18.88	18.58	18.55	5
		1	49	18.85	18.55	18.87	18.69	18.40	5
		25	0	18.79	18.70	18.88	18.81	18.68	5
		25	12	18.90	18.74	18.83	18.78	18.60	5
		50	0	18.79	18.60	18.86	18.63	18.71	5
BW	MCS Index	Channel		39675	40148	40620	41093	41565	3GPP MPR
		Frequency (MHz)		2498.5	2545.8	2593	2640.3	2687.5	
5M	QPSK	1	0	23.81	23.57	23.85	23.63	23.62	0
		1	12	23.78	23.52	23.88	23.64	23.55	0
		1	24	23.70	23.45	23.84	23.63	23.44	0
		12	0	22.89	22.76	22.95	22.77	22.71	1
		12	6	22.93	22.65	22.93	22.81	22.63	1
		12	13	22.81	22.62	22.83	22.70	22.67	1
5M	16QAM	25	0	22.85	22.68	22.93	22.72	22.70	1
		1	0	22.75	22.58	22.85	22.70	22.61	1
		1	12	22.75	22.56	22.90	22.67	22.53	1
		1	24	22.71	22.53	22.79	22.60	22.48	1
		12	0	21.86	21.81	21.98	21.76	21.79	2
		12	6	21.91	21.67	21.87	21.83	21.57	2
5M	64QAM	12	13	21.87	21.67	21.87	21.67	21.66	2
		25	0	21.89	21.73	21.93	21.70	21.67	2
		1	0	21.83	21.60	21.91	21.72	21.52	2
		1	12	21.80	21.54	21.91	21.60	21.50	2
		1	24	21.73	21.48	21.85	21.58	21.48	2
		12	0	20.87	20.80	20.95	20.77	20.77	3
5M	256QAM	12	6	20.84	20.67	20.85	20.78	20.66	3
		12	13	20.86	20.66	20.79	20.67	20.66	3
		25	0	20.90	20.71	20.94	20.72	20.68	3
		1	0	18.95	18.57	18.90	18.67	18.49	5
		1	12	18.77	18.60	18.92	18.56	18.48	5
		1	24	18.80	18.53	18.88	18.62	18.45	5
5M	256QAM	12	0	18.89	18.68	18.92	18.78	18.66	5
		12	6	18.91	18.72	18.85	18.79	18.55	5
		12	13	18.78	18.60	18.82	18.67	18.61	5
		25	0	18.93	18.77	18.94	18.81	18.63	5

LTE Conducted Power (Full)										
LTE Band 48										
BW	MCS Index	RB Size	RB Offset	Low	Mid	Mid	Mid	3GPP MPR (dB)		
		Channel		55340	55780	56210	56640			
		Frequency (MHz)		3560	3603	3647	3690			
20M	QPSK	1	0	21.73	21.75	21.53	21.87	0		
		1	50	21.65	21.72	21.52	21.85	0		
		1	99	21.64	21.71	21.49	21.83	0		
		50	0	20.93	20.91	20.92	20.99	1		
		50	25	20.88	20.95	20.88	20.98	1		
		50	50	20.86	20.90	20.79	20.97	1		
20M	16QAM	100	0	20.78	20.85	20.71	20.95	1		
		1	0	20.69	20.78	20.67	20.84	1		
		1	50	20.68	20.84	20.58	20.97	1		
		1	99	20.71	20.76	20.58	20.87	1		
		50	0	19.96	19.93	19.85	19.85	2		
		50	25	19.85	19.89	19.82	19.89	2		
20M	64QAM	50	50	19.85	19.96	19.86	19.82	2		
		100	0	19.80	19.91	19.68	19.85	2		
		1	0	19.68	19.84	19.65	19.37	2		
		1	50	19.67	19.78	19.60	19.48	2		
		1	99	19.70	19.81	19.62	19.35	2		
		50	0	18.92	18.94	18.84	18.82	3		
20M	256QAM	50	25	18.91	18.97	18.81	18.77	3		
		50	50	18.83	18.90	18.81	18.75	3		
		100	0	18.78	18.88	18.72	18.83	3		
		1	0	16.75	16.83	16.59	16.56	5		
		1	50	16.77	16.96	16.66	16.69	5		
		1	99	16.74	16.84	16.65	16.52	5		
20M	256QAM	50	0	16.84	16.75	16.94	16.81	5		
		50	25	16.89	16.81	16.76	16.85	5		
		50	50	16.96	16.72	16.79	16.81	5		
		100	0	16.81	16.79	16.72	16.79	5		
		BW	MCS Index	Channel		55315	55765	56215	56665	3GPP MPR
		Frequency (MHz)		3557.5	3602.5	3647.5	3692.5			
15M	QPSK	1	0	21.72	21.69	21.50	21.82	0		
		1	37	21.61	21.66	21.45	21.83	0		
		1	74	21.62	21.63	21.47	21.79	0		
		36	0	20.83	20.85	20.82	20.91	1		
		36	19	20.85	20.93	20.85	20.96	1		
		36	39	20.83	20.89	20.79	20.96	1		
15M	16QAM	75	0	20.69	20.80	20.68	20.94	1		
		1	0	20.71	20.74	20.49	20.84	1		
		1	37	20.58	20.72	20.42	20.78	1		
		1	74	20.61	20.65	20.44	20.78	1		
		36	0	19.89	19.88	19.83	19.91	2		
		36	19	19.87	19.93	19.87	19.95	2		
15M	64QAM	36	39	19.86	19.85	19.78	19.90	2		
		75	0	19.70	19.82	19.68	19.95	2		
		1	0	19.63	19.75	19.44	19.77	2		
		1	37	19.57	19.62	19.45	19.79	2		
		1	74	19.58	19.67	19.42	19.79	2		
		36	0	18.92	18.98	18.86	18.92	3		
15M	256QAM	36	19	18.88	18.89	18.88	18.99	3		
		36	39	18.77	18.80	18.74	18.96	3		
		75	0	18.78	18.82	18.62	18.93	3		
		1	0	16.68	16.68	16.63	16.74	5		
		1	37	16.59	16.76	16.52	16.87	5		
		1	74	16.64	16.71	16.55	16.82	5		
15M	256QAM	36	0	16.96	16.87	16.76	16.81	5		
		36	19	16.76	16.88	16.78	16.83	5		
		36	39	16.81	16.96	16.80	16.79	5		
		75	0	16.73	16.90	16.58	16.78	5		

LTE Conducted Power (Full)										
LTE Band 48										
BW	MCS Index	Channel		55290	55750	56220	56690	3GPP MPR		
		Frequency (MHz)		3555	3601	3648	3695			
10M	QPSK	1	0	21.64	21.70	21.45	21.79	0		
		1	24	21.64	21.70	21.51	21.77	0		
		1	49	21.61	21.67	21.42	21.77	0		
		25	0	20.87	20.97	20.84	20.97	1		
		25	12	20.82	20.85	20.87	20.98	1		
		25	25	20.78	20.81	20.76	20.89	1		
10M	16QAM	50	0	20.71	20.76	20.61	20.90	1		
		1	0	20.66	20.72	20.53	20.79	1		
		1	24	20.63	20.63	20.42	20.81	1		
		1	49	20.57	20.67	20.43	20.81	1		
		25	0	19.89	19.99	19.84	19.91	2		
		25	12	19.82	19.87	19.81	19.93	2		
10M	64QAM	25	25	19.77	19.89	19.73	19.88	2		
		50	0	19.73	19.79	19.71	19.92	2		
		1	0	19.68	19.68	19.46	19.83	2		
		1	24	19.57	19.62	19.50	19.79	2		
		1	49	19.57	19.69	19.39	19.73	2		
		25	0	18.85	19.00	18.84	18.92	3		
10M	256QAM	25	12	18.79	18.90	18.82	18.96	3		
		25	25	18.80	18.90	18.73	18.93	3		
		50	0	18.76	18.78	18.69	18.89	3		
		1	0	16.59	16.74	16.66	16.74	5		
		1	24	16.63	16.81	16.53	16.87	5		
		1	49	16.67	16.76	16.49	16.83	5		
10M	256QAM	25	0	16.95	16.87	16.75	16.82	5		
		25	12	16.84	16.88	16.74	16.82	5		
		25	25	16.77	16.89	16.79	16.77	5		
		50	0	16.77	16.84	16.63	16.79	5		
		BW	MCS Index	Channel		55265	55745	56235	56715	3GPP MPR
				Frequency (MHz)		3552.5	3600.5	3649.5	3697.5	
5M	QPSK	1	0	21.69	21.68	21.45	21.84	0		
		1	12	21.61	21.66	21.44	21.75	0		
		1	24	21.55	21.61	21.41	21.79	0		
		12	0	20.87	20.96	20.84	20.94	1		
		12	6	20.87	20.86	20.81	20.98	1		
		12	13	20.86	20.81	20.74	20.88	1		
5M	16QAM	25	0	20.70	20.85	20.61	20.94	1		
		1	0	20.63	20.70	20.43	20.78	1		
		1	12	20.64	20.66	20.46	20.79	1		
		1	24	20.56	20.66	20.44	20.82	1		
		12	0	19.90	19.92	19.87	20.00	2		
		12	6	19.80	19.89	19.88	19.92	2		
5M	64QAM	12	13	19.84	19.86	19.71	19.92	2		
		25	0	19.68	19.83	19.64	19.92	2		
		1	0	19.72	19.67	19.53	19.84	2		
		1	12	19.64	19.67	19.42	19.80	2		
		1	24	19.56	19.68	19.47	19.78	2		
		12	0	18.92	18.95	18.90	18.99	3		
5M	256QAM	12	6	18.82	18.91	18.79	18.98	3		
		12	13	18.78	18.88	18.76	18.91	3		
		25	0	18.69	18.81	18.68	18.90	3		
		1	0	16.68	16.78	16.60	16.82	5		
		1	12	16.60	16.81	16.56	16.87	5		
		1	24	16.70	16.72	16.51	16.85	5		
5M	256QAM	12	0	16.92	16.91	16.84	16.77	5		
		12	6	16.76	16.89	16.78	16.84	5		
		12	13	16.80	16.95	16.84	16.80	5		
		25	0	16.79	16.81	16.60	16.81	5		

LTE Conducted Power (Full)							
LTE Band 66							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		132072	132322	132572	
		Frequency (MHz)		1720	1745	1770	
20M	QPSK	1	0	23.43	23.52	23.31	0
		1	50	23.44	23.48	23.28	0
		1	99	23.42	23.45	23.25	0
		50	0	22.51	22.58	22.45	1
		50	25	22.47	22.55	22.43	1
		100	0	22.35	22.41	22.32	1
20M	16QAM	1	0	22.75	22.81	22.70	1
		1	50	22.74	22.74	22.73	1
		1	99	22.65	22.68	22.62	1
		50	0	21.37	21.46	21.28	2
		50	25	21.52	21.54	21.45	2
		100	0	21.38	21.39	21.37	2
20M	64QAM	1	0	21.52	21.62	21.52	2
		1	50	21.60	21.68	21.57	2
		1	99	21.49	21.54	21.47	2
		50	0	20.43	20.44	20.37	3
		50	25	20.45	20.49	20.41	3
		100	0	20.36	20.36	20.31	3
20M	256QAM	1	0	18.38	18.51	18.42	5
		1	50	18.40	18.48	18.48	5
		1	99	18.26	18.39	18.33	5
		50	0	18.23	18.38	18.32	5
		50	25	18.45	18.48	18.45	5
		100	0	18.25	18.33	18.30	5
BW	MCS Index	Channel		132047	132322	132597	3GPP MPR
		Frequency (MHz)		1717.5	1745	1772.5	
15M	QPSK	1	0	23.34	23.45	23.21	0
		1	37	23.37	23.48	23.24	0
		1	74	23.36	23.42	23.16	0
		36	0	22.43	22.50	22.41	1
		36	19	22.47	22.55	22.33	1
		36	39	22.29	22.44	22.26	1
		75	0	22.33	22.33	22.28	1
15M	16QAM	1	0	22.70	22.71	22.63	1
		1	37	22.69	22.64	22.69	1
		1	74	22.61	22.61	22.52	1
		36	0	21.32	21.36	21.21	2
		36	19	21.45	21.48	21.39	2
		36	39	21.30	21.38	21.33	2
		75	0	21.36	21.29	21.30	2
15M	64QAM	1	0	21.46	21.59	21.46	2
		1	37	21.52	21.64	21.51	2
		1	74	21.40	21.53	21.44	2
		36	0	20.38	20.44	20.32	3
		36	19	20.37	20.47	20.38	3
		36	39	20.30	20.27	20.26	3
		75	0	20.31	20.36	20.28	3
15M	256QAM	1	0	18.38	18.49	18.35	5
		1	37	18.32	18.48	18.43	5
		1	74	18.22	18.36	18.28	5
		36	0	18.13	18.28	18.27	5
		36	19	18.45	18.38	18.45	5
		36	39	18.17	18.28	18.26	5
		75	0	18.25	18.40	18.32	5

LTE Conducted Power (Full)									
LTE Band 66									
BW	MCS Index	Channel		132022	132322	132622	3GPP MPR		
		Frequency (MHz)		1715	1745	1775			
10M	QPSK	1	0	23.31	23.47	23.25	0		
		1	24	23.42	23.41	23.16	0		
		1	49	23.28	23.30	23.20	0		
		25	0	22.24	22.30	22.27	1		
		25	12	22.35	22.40	22.32	1		
		25	25	22.22	22.38	22.16	1		
10M	16QAM	50	0	22.15	22.29	22.24	1		
		1	0	22.58	22.68	22.55	1		
		1	24	22.64	22.63	22.61	1		
		1	49	22.55	22.45	22.41	1		
		25	0	21.19	21.39	21.09	2		
		25	12	21.36	21.40	21.26	2		
10M	64QAM	25	25	21.35	21.30	21.22	2		
		50	0	21.18	21.30	21.17	2		
		1	0	21.46	21.59	21.35	2		
		1	24	21.46	21.58	21.49	2		
		1	49	21.39	21.39	21.37	2		
		25	0	20.32	20.38	20.26	3		
10M	256QAM	25	12	20.25	20.27	20.27	3		
		25	25	20.28	20.16	20.13	3		
		50	0	20.17	20.31	20.16	3		
		1	0	18.33	18.42	18.27	5		
		1	24	18.24	18.32	18.33	5		
		1	49	18.12	18.39	18.11	5		
10M	256QAM	25	0	18.16	18.28	18.22	5		
		25	12	18.26	18.34	18.25	5		
		25	25	18.21	18.29	18.13	5		
		50	0	18.24	18.24	18.19	5		
		BW	MCS Index	Channel		131997	132322	132647	3GPP MPR
				Frequency (MHz)		1712.5	1745	1777.5	
5M	QPSK	1	0	23.29	23.40	23.10	0		
		1	12	23.31	23.26	23.10	0		
		1	24	23.22	23.44	23.16	0		
		12	0	22.32	22.30	22.33	1		
		12	6	22.31	22.53	22.30	1		
		12	13	22.16	22.43	22.24	1		
5M	16QAM	25	0	22.21	22.29	22.09	1		
		1	0	22.59	22.74	22.52	1		
		1	12	22.61	22.56	22.61	1		
		1	24	22.46	22.68	22.39	1		
		12	0	21.27	21.31	21.17	2		
		12	6	21.46	21.42	21.34	2		
5M	64QAM	12	13	21.26	21.25	21.19	2		
		25	0	21.15	21.26	21.27	2		
		1	0	21.42	21.51	21.36	2		
		1	12	21.55	21.53	21.42	2		
		1	24	21.43	21.37	21.44	2		
		12	0	20.32	20.21	20.18	3		
5M	256QAM	12	6	20.36	20.37	20.30	3		
		12	13	20.16	20.26	20.26	3		
		25	0	20.17	20.34	20.18	3		
		1	0	18.30	18.28	18.29	5		
		1	12	18.28	18.34	18.34	5		
		1	24	18.13	18.18	18.15	5		
5M	256QAM	12	0	18.08	18.29	18.25	5		
		12	6	18.30	18.31	18.26	5		
		12	13	18.15	18.15	18.08	5		
		25	0	18.13	18.32	18.06	5		
		25	0	18.13	18.32	18.06	5		

LTE Conducted Power (Full)									
LTE Band 66									
BW	MCS Index	Channel		131987	132322	132657	3GPP MPR		
		Frequency (MHz)		1711.5	1745	1778.5			
3M	QPSK	1	0	23.41	23.47	23.27	0		
		1	7	23.32	23.35	23.19	0		
		1	14	23.34	23.37	23.17	0		
		8	0	22.38	22.39	22.27	1		
		8	3	22.33	22.47	22.24	1		
		8	7	22.33	22.24	22.24	1		
3M	16QAM	15	0	22.21	22.27	22.09	1		
		1	0	22.56	22.75	22.60	1		
		1	7	22.65	22.60	22.68	1		
		1	14	22.63	22.59	22.50	1		
		8	0	21.30	21.27	21.18	2		
		8	3	21.51	21.38	21.32	2		
3M	64QAM	8	7	21.31	21.30	21.22	2		
		15	0	21.32	21.22	21.17	2		
		1	0	21.39	21.56	21.40	2		
		1	7	21.51	21.59	21.44	2		
		1	14	21.30	21.48	21.39	2		
		8	0	20.38	20.26	20.21	3		
3M	256QAM	8	3	20.35	20.37	20.18	3		
		8	7	20.30	20.32	20.12	3		
		15	0	20.27	20.42	20.12	3		
		1	0	18.29	18.40	18.18	5		
		1	7	18.30	18.33	18.36	5		
		1	14	18.09	18.25	18.16	5		
3M	256QAM	8	0	18.09	18.18	18.12	5		
		8	3	18.32	18.39	18.29	5		
		8	7	18.08	18.22	18.14	5		
		15	0	18.22	18.23	18.24	5		
		BW	MCS Index	Channel		131979	132322	132665	3GPP MPR
				Frequency (MHz)		1710.7	1745	1779.3	
1.4M	QPSK	1	0	23.23	23.37	23.17	0		
		1	2	23.34	23.39	23.23	0		
		1	5	23.30	23.32	23.22	0		
		3	0	23.28	23.33	23.35	0		
		3	1	23.34	23.42	23.18	0		
		3	3	23.17	23.27	23.27	0		
1.4M	16QAM	6	0	22.32	22.26	22.23	1		
		1	0	22.73	22.58	22.56	1		
		1	2	22.62	22.58	22.68	1		
		1	5	22.50	22.47	22.44	1		
		3	0	22.20	22.36	22.26	1		
		3	1	22.36	22.37	22.27	1		
1.4M	64QAM	3	3	22.35	22.17	22.11	1		
		6	0	21.35	21.23	21.30	2		
		1	0	21.32	21.44	21.41	2		
		1	2	21.50	21.55	21.51	2		
		1	5	21.45	21.33	21.34	2		
		3	0	21.27	21.33	21.34	2		
1.4M	256QAM	3	1	21.23	21.38	21.26	2		
		3	3	21.21	21.20	21.25	2		
		6	0	20.17	20.30	20.26	3		
		1	0	18.23	18.32	18.31	5		
		1	2	18.25	18.32	18.39	5		
		1	5	18.10	18.30	18.12	5		
1.4M	256QAM	3	0	18.15	18.22	18.14	5		
		3	1	18.31	18.45	18.22	5		
		3	3	18.08	18.17	18.07	5		
		6	0	18.14	18.32	18.14	5		

LTE Conducted Power (Full)									
LTE Band 71									
BW	MCS Index	RB Size	RB Offset	Low	Mid	Mid	3GPP MPR (dB)		
		Channel		133222	133297	133372			
		Frequency (MHz)		673	680.5	688			
20M	QPSK	1	0	23.53	23.47	23.42	0		
		1	50	23.48	23.47	23.40	0		
		1	99	23.42	23.41	23.39	0		
		50	0	22.52	22.50	22.40	1		
		50	25	22.46	22.37	22.28	1		
		50	50	22.38	22.35	22.28	1		
20M	16QAM	100	0	22.44	22.35	22.34	1		
		1	0	22.70	22.63	22.57	1		
		1	50	22.68	22.67	22.65	1		
		1	99	22.65	22.63	22.55	1		
		50	0	21.52	21.50	21.45	2		
		50	25	21.50	21.40	21.40	2		
20M	64QAM	50	50	21.38	21.38	21.36	2		
		100	0	21.39	21.30	21.24	2		
		1	0	21.70	21.70	21.69	2		
		1	50	21.68	21.60	21.55	2		
		1	99	21.63	21.54	21.51	2		
		50	0	20.48	20.38	20.37	3		
20M	256QAM	50	25	20.44	20.36	20.29	3		
		50	50	20.31	20.23	20.14	3		
		100	0	20.38	20.32	20.24	3		
		1	0	18.75	18.73	18.66	5		
		1	50	18.70	18.68	18.60	5		
		1	99	18.68	18.58	18.56	5		
20M	256QAM	50	0	18.48	18.46	18.44	5		
		50	25	18.42	18.33	18.31	5		
		50	50	18.30	18.28	18.21	5		
		100	0	18.35	18.25	18.15	5		
		BW	MCS Index	Channel		133197	133297	133397	3GPP MPR
		Frequency (MHz)		670.5	680.5	690.5			
15M	QPSK	1	0	23.43	23.37	23.36	0		
		1	37	23.47	23.42	23.39	0		
		1	74	23.42	23.36	23.37	0		
		36	0	22.50	22.43	22.30	1		
		36	19	22.36	22.36	22.20	1		
		36	39	22.35	22.31	22.22	1		
15M	16QAM	75	0	22.40	22.26	22.26	1		
		1	0	22.68	22.54	22.52	1		
		1	37	22.61	22.63	22.55	1		
		1	74	22.55	22.60	22.53	1		
		36	0	21.47	21.50	21.37	2		
		36	19	21.49	21.31	21.37	2		
15M	64QAM	36	39	21.35	21.30	21.33	2		
		75	0	21.33	21.25	21.15	2		
		1	0	21.65	21.62	21.61	2		
		1	37	21.68	21.56	21.50	2		
		1	74	21.60	21.47	21.50	2		
		36	0	20.38	20.30	20.30	3		
15M	256QAM	36	19	20.35	20.31	20.25	3		
		36	39	20.22	20.14	20.11	3		
		75	0	20.33	20.26	20.24	3		
		1	0	18.69	18.71	18.66	5		
		1	37	18.64	18.67	18.57	5		
		1	74	18.68	18.49	18.54	5		
15M	256QAM	36	0	18.40	18.41	18.40	5		
		36	19	18.42	18.28	18.31	5		
		36	39	18.20	18.25	18.13	5		
		75	0	18.33	18.22	18.13	5		

LTE Conducted Power (Full)									
LTE Band 71									
BW	MCS Index	Channel		133172	133297	133422	3GPP MPR		
		Frequency (MHz)		668	680.5	693			
10M	QPSK	1	0	23.49	23.40	23.39	0		
		1	24	23.46	23.44	23.35	0		
		1	49	23.35	23.39	23.37	0		
		25	0	22.46	22.45	22.40	1		
		25	12	22.41	22.30	22.26	1		
		25	25	22.38	22.30	22.23	1		
10M	16QAM	50	0	22.44	22.25	22.32	1		
		1	0	22.66	22.54	22.53	1		
		1	24	22.68	22.58	22.65	1		
		1	49	22.65	22.61	22.55	1		
		25	0	21.44	21.50	21.43	2		
		25	12	21.43	21.34	21.36	2		
10M	64QAM	25	25	21.34	21.37	21.29	2		
		50	0	21.37	21.22	21.20	2		
		1	0	21.63	21.69	21.64	2		
		1	24	21.62	21.55	21.55	2		
		1	49	21.62	21.48	21.49	2		
		25	0	20.47	20.28	20.30	3		
10M	256QAM	25	12	20.34	20.26	20.24	3		
		25	25	20.26	20.22	20.14	3		
		50	0	20.36	20.32	20.20	3		
		1	0	18.75	18.70	18.61	5		
		1	24	18.68	18.67	18.50	5		
		1	49	18.58	18.57	18.52	5		
10M	256QAM	25	0	18.39	18.43	18.43	5		
		25	12	18.32	18.28	18.23	5		
		25	25	18.25	18.27	18.19	5		
		50	0	18.25	18.18	18.10	5		
		BW	MCS Index	Channel		133147	133297	133447	3GPP MPR
				Frequency (MHz)		665.5	680.5	695.5	
5M	QPSK	1	0	23.49	23.40	23.35	0		
		1	12	23.45	23.42	23.31	0		
		1	24	23.36	23.41	23.29	0		
		12	0	22.51	22.41	22.38	1		
		12	6	22.46	22.33	22.28	1		
		12	13	22.30	22.31	22.25	1		
5M	16QAM	25	0	22.36	22.32	22.29	1		
		1	0	22.68	22.63	22.51	1		
		1	12	22.67	22.59	22.60	1		
		1	24	22.59	22.57	22.51	1		
		12	0	21.52	21.43	21.36	2		
		12	6	21.48	21.37	21.36	2		
5M	64QAM	12	13	21.35	21.28	21.34	2		
		25	0	21.30	21.27	21.15	2		
		1	0	21.67	21.70	21.63	2		
		1	12	21.58	21.56	21.51	2		
		1	24	21.55	21.48	21.42	2		
		12	0	20.46	20.33	20.32	3		
5M	256QAM	12	6	20.36	20.30	20.21	3		
		12	13	20.29	20.18	20.13	3		
		25	0	20.37	20.30	20.18	3		
		1	0	18.66	18.67	18.57	5		
		1	12	18.67	18.66	18.50	5		
		1	24	18.59	18.55	18.51	5		
5M	256QAM	12	0	18.41	18.37	18.34	5		
		12	6	18.36	18.28	18.27	5		
		12	13	18.29	18.25	18.20	5		
		25	0	18.33	18.18	18.05	5		

NR Conducted Power (Full)

NR Band 2_SA

BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		372000	376000	380000	
		Frequency (MHz)		1860	1880	1900	
20M	DFT-S PI/2 BPSK	1	1	23.02	23.13	22.75	0
20M	DFT-S QPSK	1	1	23.07	23.15	22.81	0
		1	53	23.12	23.04	23.00	0
		1	104	23.13	23.09	23.08	0
		50	0	21.99	22.06	21.97	1
		50	28	22.77	22.85	22.73	0
		50	56	22.09	22.02	22.01	1
		100	0	22.05	22.11	21.98	1
20M	DFT-S 16QAM	1	1	21.97	21.89	21.84	1
20M	DFT-S 64QAM	1	1	20.59	20.52	20.43	2.5
20M	DFT-S 256QAM	1	1	18.58	18.57	18.48	4.5
20M	CP QPSK	1	1	22.18	22.13	22.11	1.5
BW	MCS Index	Channel		371500	376000	380500	3GPP MPR
		Frequency (MHz)		1857.5	1880	1902.5	
15M	DFT-S PI/2 BPSK	1	1	22.99	23.05	22.70	0
15M	DFT-S QPSK	1	1	23.03	22.96	22.74	0
		1	40	23.03	22.98	22.96	0
		1	77	23.05	23.06	23.03	0
		36	0	21.96	21.94	21.92	1
		36	22	22.77	22.78	22.66	0
		36	43	22.01	21.98	22.00	1
		75	0	22.04	22.00	21.88	1
15M	DFT-S 16QAM	1	1	21.90	21.83	21.75	1
15M	DFT-S 64QAM	1	1	20.59	20.46	20.35	2.5
15M	DFT-S 256QAM	1	1	18.55	18.56	18.45	4.5
15M	CP QPSK	1	1	22.09	22.11	22.05	1.5

NR Conducted Power (Full)

NR Band 2_SA

BW	MCS Index	Channel		371000	376000	381000	3GPP MPR
		Frequency (MHz)		1855	1880	1905	
10M	DFT-S PI/2 BPSK	1	1	22.91	22.93	22.65	0
10M	DFT-S QPSK	1	1	22.99	23.07	22.79	0
		1	26	23.10	23.04	22.97	0
		1	50	23.10	23.00	23.03	0
		25	0	22.01	21.91	21.97	1
		25	14	22.69	22.75	22.65	0
		25	27	22.05	21.96	21.96	1
		50	0	22.11	21.96	21.97	1
10M	DFT-S 16QAM	1	1	21.92	21.83	21.80	1
10M	DFT-S 64QAM	1	1	20.59	20.46	20.36	2.5
10M	DFT-S 256QAM	1	1	18.52	18.53	18.48	4.5
10M	CP QPSK	1	1	22.02	22.05	22.07	1.5
BW	MCS Index	Channel		370500	376000	381500	3GPP MPR
		Frequency (MHz)		1852.5	1880	1907.5	
5M	DFT-S PI/2 BPSK	1	1	22.95	23.05	22.53	0
5M	DFT-S QPSK	1	1	23.04	23.13	22.80	0
		1	13	23.02	22.98	22.91	0
		1	23	23.05	23.02	23.05	0
		12	0	22.02	21.93	21.95	1
		12	7	22.68	22.73	22.63	0
		12	13	22.01	21.94	22.00	1
		25	0	22.09	22.04	21.90	1
5M	DFT-S 16QAM	1	1	21.90	21.82	21.83	1
5M	DFT-S 64QAM	1	1	20.57	20.45	20.41	2.5
5M	DFT-S 256QAM	1	1	18.57	18.53	18.39	4.5
5M	CP QPSK	1	1	22.08	22.03	21.86	1.5

NR Conducted Power (Full)

NR Band 5_SA

BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		166800	167300	167800	
		Frequency (MHz)		834	836.5	839	
20M	DFT-S PI/2 BPSK	1	1	23.48	23.68	23.53	0
20M	DFT-S QPSK	1	1	23.53	23.75	23.58	0
		1	53	23.50	23.65	23.55	0
		1	104	23.42	23.57	23.47	0
		50	0	22.60	22.75	22.65	1
		50	28	23.59	23.74	23.64	0
		50	56	22.50	22.65	22.55	1
		100	0	22.58	22.71	22.61	1
20M	DFT-S 16QAM	1	1	22.51	22.66	22.56	1
20M	DFT-S 64QAM	1	1	20.96	21.11	21.01	2.5
20M	DFT-S 256QAM	1	1	19.07	19.22	19.12	4.5
20M	CP QPSK	1	1	22.02	22.18	22.09	1.5
BW	MCS Index	Channel		166300	167300	168300	3GPP MPR
		Frequency (MHz)		831.5	836.5	841.5	
15M	DFT-S PI/2 BPSK	1	1	23.46	23.66	23.47	0
15M	DFT-S QPSK	1	1	23.46	23.73	23.52	0
		1	40	23.41	23.65	23.49	0
		1	77	23.42	23.50	23.46	0
		36	0	22.51	22.67	22.65	1
		36	22	23.54	23.64	23.62	0
		36	43	22.50	22.59	22.49	1
		75	0	22.50	22.61	22.57	1
15M	DFT-S 16QAM	1	1	22.51	22.64	22.56	1
15M	DFT-S 64QAM	1	1	20.87	21.02	20.99	2.5
15M	DFT-S 256QAM	1	1	18.98	19.22	19.11	4.5
15M	CP QPSK	1	1	21.98	22.09	22.08	1.5

NR Conducted Power (Full)

NR Band 5_SA

BW	MCS Index	Channel		165800	167300	168800	3GPP MPR
		Frequency (MHz)		829	836.5	844	
10M	DFT-S PI/2 BPSK	1	1	23.39	23.56	23.38	0
10M	DFT-S QPSK	1	1	23.49	23.68	23.48	0
		1	26	23.41	23.64	23.54	0
		1	50	23.40	23.57	23.43	0
		25	0	22.54	22.70	22.65	1
		25	14	23.53	23.66	23.59	0
		25	27	22.43	22.65	22.48	1
		50	0	22.57	22.67	22.57	1
10M	DFT-S 16QAM	1	1	22.42	22.66	22.50	1
10M	DFT-S 64QAM	1	1	20.90	21.08	20.93	2.5
10M	DFT-S 256QAM	1	1	19.02	19.12	19.10	4.5
10M	CP QPSK	1	1	21.98	22.00	22.06	1.5
BW	MCS Index	Channel		165300	167300	169300	3GPP MPR
		Frequency (MHz)		826.5	836.5	846.5	
5M	DFT-S PI/2 BPSK	1	1	23.31	23.51	23.21	0
5M	DFT-S QPSK	1	1	23.47	23.73	23.52	0
		1	13	23.50	23.59	23.47	0
		1	23	23.42	23.51	23.42	0
		12	0	22.53	22.68	22.65	1
		12	7	23.57	23.72	23.59	0
		12	13	22.50	22.62	22.50	1
		25	0	22.48	22.71	22.53	1
5M	DFT-S 16QAM	1	1	22.46	22.59	22.46	1
5M	DFT-S 64QAM	1	1	20.93	21.09	20.96	2.5
5M	DFT-S 256QAM	1	1	19.01	19.22	19.06	4.5
5M	CP QPSK	1	1	21.88	22.06	21.92	1.5

NR Conducted Power (Full)

NR Band 7_SA

BW	MCS Index	Channel		502000	507000	512000	3GPP MPR
		Frequency (MHz)		2510	2535	2560	
20M	DFT-S PI/2 BPSK	1	1	22.39	22.69	22.51	0
20M	DFT-S QPSK	1	1	22.60	22.77	22.63	0
		1	53	22.54	22.72	22.61	0
		1	104	22.38	22.60	22.47	0
		50	0	21.54	21.69	21.53	1
		50	28	22.53	22.76	22.64	0
		50	56	21.49	21.75	21.54	1
		100	0	21.56	21.75	21.54	1
20M	DFT-S 16QAM	1	1	21.63	21.94	21.70	1
20M	DFT-S 64QAM	1	1	19.87	19.98	19.83	2.5
20M	DFT-S 256QAM	1	1	18.02	19.08	18.04	4.5
20M	CP QPSK	1	1	21.82	22.00	22.05	1.5
BW	MCS Index	Channel		501500	507000	512500	3GPP MPR
		Frequency (MHz)		2507.5	2535	2562.5	
15M	DFT-S PI/2 BPSK	1	1	22.50	22.75	22.44	0
15M	DFT-S QPSK	1	1	22.52	22.76	22.64	0
		1	40	22.50	22.75	22.59	0
		1	77	22.41	22.64	22.43	0
		36	0	21.46	21.72	21.56	1
		36	22	22.59	22.71	22.62	0
		36	43	21.49	21.72	21.60	1
		75	0	21.49	21.69	21.57	1
15M	DFT-S 16QAM	1	1	21.64	21.86	21.69	1
15M	DFT-S 64QAM	1	1	19.79	19.97	19.85	2.5
15M	DFT-S 256QAM	1	1	17.96	19.14	18.00	4.5
15M	CP QPSK	1	1	21.91	22.00	21.90	1.5

NR Conducted Power (Full)

NR Band 7_SA

BW	MCS Index	Channel		501000	507000	513000	3GPP MPR
		Frequency (MHz)		2505	2535	2565	
10M	DFT-S PI/2 BPSK	1	1	22.54	22.63	22.55	0
10M	DFT-S QPSK	1	1	22.58	22.76	22.61	0
		1	26	22.49	22.74	22.61	0
		1	50	22.35	22.57	22.50	0
		25	0	21.48	21.65	21.58	1
		25	14	22.50	22.67	22.59	0
		25	27	21.56	21.70	21.56	1
		50	0	21.53	21.69	21.55	1
10M	DFT-S 16QAM	1	1	21.71	21.92	21.74	1
10M	DFT-S 64QAM	1	1	19.86	20.03	19.88	2.5
10M	DFT-S 256QAM	1	1	18.01	19.10	17.96	4.5
10M	CP QPSK	1	1	21.83	21.94	21.90	1.5
BW	MCS Index	Channel		500500	507000	513500	3GPP MPR
		Frequency (MHz)		2502.5	2535	2567.5	
5M	DFT-S PI/2 BPSK	1	1	22.40	22.60	22.41	0
5M	DFT-S QPSK	1	1	22.54	22.74	22.67	0
		1	13	22.53	22.71	22.55	0
		1	23	22.42	22.60	22.49	0
		12	0	21.46	21.66	21.57	1
		12	7	22.52	22.72	22.60	0
		12	13	21.54	21.73	21.57	1
		25	0	21.54	21.71	21.55	1
5M	DFT-S 16QAM	1	1	21.63	21.93	21.76	1
5M	DFT-S 64QAM	1	1	19.85	19.97	19.88	2.5
5M	DFT-S 256QAM	1	1	18.01	19.07	18.01	4.5
5M	CP QPSK	1	1	21.87	22.04	21.88	1.5

NR Conducted Power (Full)

NR Band 25_SA

BW	MCS Index	Channel		372000	376500	381000	3GPP MPR
		Frequency (MHz)		1860	1882.5	1905	
20M	DFT-S PI/2 BPSK	1	1	22.87	22.85	22.66	0
20M	DFT-S QPSK	1	1	22.96	22.97	22.67	0
		1	53	22.92	22.83	22.83	0
		1	104	22.88	22.86	22.88	0
		50	0	21.88	21.94	21.93	1
		50	28	22.50	22.54	22.29	0
		50	56	21.93	21.77	21.78	1
		100	0	21.88	21.92	21.83	1
20M	DFT-S 16QAM	1	1	21.72	21.70	21.87	1
20M	DFT-S 64QAM	1	1	20.41	20.37	20.37	2.5
20M	DFT-S 256QAM	1	1	18.46	18.37	18.38	4.5
20M	CP QPSK	1	1	21.76	21.70	21.74	1.5

NR Conducted Power (Full)

NR Band 25_SA

BW	MCS Index	Channel		371500	376500	381500	3GPP MPR
		Frequency (MHz)		1857.5	1882.5	1907.5	
15M	DFT-S PI/2 BPSK	1	1	22.85	22.87	22.69	0
15M	DFT-S QPSK	1	1	22.95	22.96	22.67	0
		1	40	22.86	22.84	22.76	0
		1	77	22.96	22.89	22.79	0
		36	0	21.90	21.79	21.82	1
		36	22	22.43	22.39	22.29	0
		36	43	21.83	21.79	21.76	1
		75	0	21.91	21.81	21.73	1
15M	DFT-S 16QAM	1	1	21.67	21.80	21.73	1
15M	DFT-S 64QAM	1	1	20.49	20.31	20.31	2.5
15M	DFT-S 256QAM	1	1	18.40	18.39	18.39	4.5
15M	CP QPSK	1	1	22.82	22.84	22.82	1.5
BW	MCS Index	Channel		371000	376500	382000	3GPP MPR
		Frequency (MHz)		1855	1882.5	1910	
10M	DFT-S PI/2 BPSK	1	1	22.88	22.87	22.58	0
10M	DFT-S QPSK	1	1	22.91	22.92	22.60	0
		1	26	22.90	22.84	22.71	0
		1	50	22.95	22.76	22.86	0
		25	0	21.90	21.85	21.88	1
		25	14	22.33	22.34	22.16	0
		25	27	21.99	21.88	21.84	1
		50	0	21.81	21.95	21.83	1
10M	DFT-S 16QAM	1	1	21.84	21.76	21.68	1
10M	DFT-S 64QAM	1	1	20.45	20.43	20.38	2.5
10M	DFT-S 256QAM	1	1	18.35	18.46	18.35	4.5
10M	CP QPSK	1	1	21.59	21.56	21.41	1.5

NR Conducted Power (Full)

NR Band 25_SA

BW	MCS Index	Channel		370500	376500	382500	3GPP MPR
		Frequency (MHz)		1852.5	1882.5	1912.5	
5M	DFT-S PI/2 BPSK	1	1	22.85	22.81	22.55	0
5M	DFT-S QPSK	1	1	22.88	22.82	22.54	0
		1	13	22.80	22.84	22.64	0
		1	23	22.85	22.69	22.77	0
		12	0	21.90	21.76	21.81	1
		12	7	22.30	22.24	22.08	0
		12	13	21.99	21.82	21.84	1
		25	0	21.75	21.94	21.75	1
5M	DFT-S 16QAM	1	1	21.82	21.74	21.64	1
5M	DFT-S 64QAM	1	1	20.43	20.42	20.36	2.5
5M	DFT-S 256QAM	1	1	18.34	18.43	18.27	4.5
5M	CP QPSK	1	1	21.37	21.44	21.27	1.5

NR Conducted Power (Full)

NR Band 30_SA

BW	MCS Index	RB Size	RB Offset		Mid		3GPP MPR (dB)
		Channel			462000		
		Frequency (MHz)			2310		
10M	DFT-S PI/2 BPSK	1	1		22.73		0
10M	DFT-S QPSK	1	1		22.95		0
		1	26		22.81		0
		1	50		22.89		0
		25	0		21.87		1
		25	14		22.86		0
		25	27		21.88		1
		50	0		21.91		1
10M	DFT-S 16QAM	1	1		21.83		1
10M	DFT-S 64QAM	1	1		20.14		2.5
10M	DFT-S 256QAM	1	1		18.31		4.5
10M	CP QPSK	1	1		21.12		1.5
BW	MCS Index	Channel		461500	462000	462500	3GPP MPR
		Frequency (MHz)		2307.5	2310	2312.5	
5M	DFT-S PI/2 BPSK	1	1	22.57	22.66	22.52	0
5M	DFT-S QPSK	1	1	22.70	22.86	22.76	0
		1	13	22.51	22.75	22.56	0
		1	23	22.67	22.84	22.62	0
		12	0	21.62	21.87	21.66	1
		12	7	22.61	22.83	22.63	0
		12	13	21.58	21.83	21.63	1
		25	0	21.68	21.86	21.67	1
5M	DFT-S 16QAM	1	1	21.53	21.82	21.58	1
5M	DFT-S 64QAM	1	1	19.92	20.08	19.94	2.5
5M	DFT-S 256QAM	1	1	18.06	18.24	18.12	4.5
5M	CP QPSK	1	1	20.85	21.03	20.88	1.5

NR Conducted Power (Full)

NR Band 66_SA

BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		346000	349000	352000	
		Frequency (MHz)		1730	1745	1760	
40M	DFT-S PI/2 BPSK	1	1	22.33	22.43	22.28	0
40M	DFT-S QPSK	1	1	22.45	22.48	22.32	0
		1	108	22.28	22.37	22.15	0
		1	214	22.21	22.32	22.13	0
		108	0	22.10	22.13	22.11	1
		108	54	22.22	22.39	22.28	0
		108	108	22.27	22.34	22.22	1
		216	0	22.24	22.31	22.22	1
40M	DFT-S 16QAM	1	1	21.59	21.59	21.54	1
40M	DFT-S 64QAM	1	1	21.34	21.38	21.28	2.5
40M	DFT-S 256QAM	1	1	19.22	19.33	19.21	4.5
40M	CP QPSK	1	1	21.98	22.08	21.88	1.5

NR Conducted Power (Full)

NR Band 66_SA

BW	MCS Index	Channel		344500	349000	353500	3GPP MPR
		Frequency (MHz)		1722.5	1745	1767.5	
25M	DFT-S PI/2 BPSK	1	1	22.30	22.24	22.11	0
25M	DFT-S QPSK	1	1	22.32	22.46	22.13	0
		1	67	22.17	22.20	21.99	0
		1	131	22.12	22.19	21.97	0
		64	0	21.95	22.02	21.99	1
		64	35	22.15	22.25	22.08	0
		64	69	22.09	22.29	22.10	1
		128	0	22.13	22.22	22.17	1
25M	DFT-S 16QAM	1	1	21.48	21.45	21.47	1
25M	DFT-S 64QAM	1	1	21.16	21.25	21.15	2.5
25M	DFT-S 256QAM	1	1	19.14	19.11	19.06	4.5
25M	CP QPSK	1	1	21.86	22.02	21.69	1.5
BW	MCS Index	Channel		344000	349000	354000	3GPP MPR
		Frequency (MHz)		1720	1745	1770	
20M	DFT-S PI/2 BPSK	1	1	22.24	22.35	22.13	0
20M	DFT-S QPSK	1	1	22.31	22.39	22.15	0
		1	53	22.09	22.28	22.12	0
		1	104	22.02	22.14	22.08	0
		50	0	22.06	22.04	21.93	1
		50	28	22.14	22.29	22.16	0
		50	56	22.10	22.13	22.00	1
		100	0	22.13	22.09	22.04	1
20M	DFT-S 16QAM	1	1	21.44	21.47	21.34	1
20M	DFT-S 64QAM	1	1	21.17	21.34	21.11	2.5
20M	DFT-S 256QAM	1	1	19.11	19.10	19.18	4.5
20M	CP QPSK	1	1	21.88	21.97	21.76	1.5

NR Conducted Power (Full)

NR Band 66_SA

BW	MCS Index	Channel		343500	349000	354500	3GPP MPR
		Frequency (MHz)		1717.5	1745	1772.5	
15M	DFT-S PI/2 BPSK	1	1	22.09	22.20	22.21	0
15M	DFT-S QPSK	1	1	22.26	22.35	22.21	0
		1	40	22.16	22.24	22.01	0
		1	77	22.08	22.12	22.08	0
		36	0	21.96	22.02	21.95	1
		36	22	22.03	22.16	22.13	0
		36	43	22.07	22.23	22.12	1
		75	0	22.05	22.15	22.03	1
15M	DFT-S 16QAM	1	1	21.54	21.53	21.48	1
15M	DFT-S 64QAM	1	1	21.26	21.26	21.11	2.5
15M	DFT-S 256QAM	1	1	18.98	19.19	19.06	4.5
15M	CP QPSK	1	1	21.85	22.01	21.79	1.5
BW	MCS Index	Channel		343000	349000	355000	3GPP MPR
		Frequency (MHz)		1715	1745	1775	
10M	DFT-S PI/2 BPSK	1	1	22.11	22.27	22.07	0
10M	DFT-S QPSK	1	1	22.44	22.32	22.26	0
		1	26	22.08	22.24	22.04	0
		1	50	22.08	22.12	22.03	0
		25	0	21.92	21.98	22.07	1
		25	14	22.08	22.36	22.12	0
		25	27	22.08	22.26	22.11	1
		50	0	22.23	22.23	22.10	1
10M	DFT-S 16QAM	1	1	21.53	21.53	21.37	1
10M	DFT-S 64QAM	1	1	21.23	21.21	21.15	2.5
10M	DFT-S 256QAM	1	1	19.02	19.22	19.04	4.5
10M	CP QPSK	1	1	21.83	21.94	21.78	1.5

NR Conducted Power (Full)

NR Band 66_SA

BW	MCS Index	Channel		342500	349000	355500	3GPP MPR
		Frequency (MHz)		1712.5	1745	1777.5	
5M	DFT-S PI/2 BPSK	1	1	22.25	22.24	22.23	0
5M	DFT-S QPSK	1	1	22.29	22.33	22.22	0
		1	13	22.17	22.32	22.08	0
		1	23	22.08	22.15	22.05	0
		12	0	21.98	22.09	21.90	1
		12	7	22.19	22.25	22.06	0
		12	13	22.21	22.16	22.06	1
		25	0	22.00	22.28	22.13	1
5M	DFT-S 16QAM	1	1	21.59	21.40	21.46	1
5M	DFT-S 64QAM	1	1	21.30	21.24	21.18	2.5
5M	DFT-S 256QAM	1	1	19.17	19.16	19.16	4.5
5M	CP QPSK	1	1	21.87	21.86	21.83	1.5

NR Conducted Power (Full)

NR Band 71_SA

BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		134600	136100	137600	
		Frequency (MHz)		673	680.5	688	
20M	DFT-S PI/2 BPSK	1	1	23.52	23.59	23.51	0
20M	DFT-S QPSK	1	1	23.75	23.77	23.76	0
		1	53	23.58	23.60	23.59	0
		1	104	23.66	23.68	23.67	0
		50	0	22.72	22.74	22.73	1
		50	28	23.64	23.66	23.65	0
		50	56	22.59	22.61	22.60	1
		100	0	22.68	22.70	22.69	1
20M	DFT-S 16QAM	1	1	22.54	22.56	22.55	1
20M	DFT-S 64QAM	1	1	21.57	21.59	21.58	2.5
20M	DFT-S 256QAM	1	1	19.40	19.42	19.41	4.5
20M	CP QPSK	1	1	22.25	22.27	22.26	1.5
BW	MCS Index	Channel		134100	136100	138100	3GPP MPR
		Frequency (MHz)		670.5	680.5	690.5	
15M	DFT-S PI/2 BPSK	1	1	23.44	23.57	23.34	0
15M	DFT-S QPSK	1	1	23.63	23.71	23.72	0
		1	40	23.44	23.53	23.59	0
		1	77	23.52	23.64	23.46	0
		36	0	22.62	22.67	22.64	1
		36	22	23.54	23.55	23.54	0
		36	43	22.46	22.61	22.39	1
		75	0	22.57	22.51	22.57	1
15M	DFT-S 16QAM	1	1	22.41	22.43	22.46	1
15M	DFT-S 64QAM	1	1	21.44	21.52	21.37	2.5
15M	DFT-S 256QAM	1	1	19.26	19.30	19.39	4.5
15M	CP QPSK	1	1	22.09	22.23	22.10	1.5


NR Conducted Power (Full)

NR Band 71_SA

BW	MCS Index	Channel		133600	136100	138600	3GPP MPR
		Frequency (MHz)		668	680.5	693	
10M	DFT-S PI/2 BPSK	1	1	23.45	23.42	23.40	0
10M	DFT-S QPSK	1	1	23.61	23.75	23.66	0
		1	26	23.49	23.51	23.46	0
		1	50	23.49	23.57	23.49	0
		25	0	22.64	22.60	22.60	1
		25	14	23.58	23.53	23.53	0
		25	27	22.50	22.52	22.48	1
		50	0	22.58	22.64	22.59	1
10M	DFT-S 16QAM	1	1	22.34	22.42	22.47	1
10M	DFT-S 64QAM	1	1	21.53	21.48	21.46	2.5
10M	DFT-S 256QAM	1	1	19.27	19.24	19.29	4.5
10M	CP QPSK	1	1	22.19	22.21	22.20	1.5
BW	MCS Index	Channel		133100	136100	139100	3GPP MPR
		Frequency (MHz)		665.5	680.5	695.5	
5M	DFT-S PI/2 BPSK	1	1	23.51	23.44	23.46	0
5M	DFT-S QPSK	1	1	23.70	23.61	23.61	0
		1	13	23.53	23.44	23.44	0
		1	23	23.61	23.48	23.54	0
		12	0	22.57	22.66	22.69	1
		12	7	23.51	23.62	23.42	0
		12	13	22.43	22.36	22.37	1
		25	0	22.51	22.54	22.60	1
5M	DFT-S 16QAM	1	1	22.47	22.36	22.43	1
5M	DFT-S 64QAM	1	1	21.52	21.38	21.47	2.5
5M	DFT-S 256QAM	1	1	19.21	19.26	19.31	4.5
5M	CP QPSK	1	1	22.17	22.10	22.20	1.5

NR Conducted Power (Full)

NR Band 38_SA




BW	MCS Index	Channel		516000	519000	522000	3GPP MPR
		Frequency (MHz)		2580	2595	2610	
20M	DFT-S PI/2 BPSK	1	1	22.24	22.48	22.30	0
20M	DFT-S QPSK	1	1	22.22	22.58	22.26	0
		1	26	22.30	22.40	22.30	0
		1	49	22.22	22.38	22.15	0
		25	0	21.16	21.33	21.19	1
		25	13	22.24	22.35	22.34	0
		25	26	21.17	21.07	21.17	1
		50	0	21.19	21.37	21.01	1
20M	DFT-S 16QAM	1	1	20.68	20.88	20.69	1
20M	DFT-S 64QAM	1	1	19.64	19.60	19.52	2.5
20M	DFT-S 256QAM	1	1	17.33	17.48	17.33	4.5
20M	CP QPSK	1	1	21.95	22.15	21.90	1.5

NR Conducted Power (Full)							
NR Band 38_SA							
BW	MCS Index	Channel		515500	519000	522500	3GPP MPR
		Frequency (MHz)		2577.5	2595	2612.5	
15M	DFT-S PI/2 BPSK	1	1	22.20	22.40	22.30	0
15M	DFT-S QPSK	1	1	22.30	22.50	22.35	0
		1	19	22.39	22.40	22.27	0
		1	36	22.35	22.41	22.16	0
		18	0	21.20	21.24	21.05	1
		18	10	22.28	22.34	22.40	0
		18	20	21.10	21.18	21.06	1
36	0	21.19	21.25	21.12	1		
15M	DFT-S 16QAM	1	1	20.77	20.86	20.82	1
15M	DFT-S 64QAM	1	1	19.56	19.61	19.50	2.5
15M	DFT-S 256QAM	1	1	17.29	17.43	17.34	4.5
15M	CP QPSK	1	1	22.07	22.05	21.87	1.5
BW	MCS Index	Channel		515000	519000	523000	3GPP MPR
		Frequency (MHz)		2575	2595	2615	
10M	DFT-S PI/2 BPSK	1	1	22.20	22.46	22.39	0
10M	DFT-S QPSK	1	1	22.26	22.48	22.36	0
		1	11	22.30	22.47	22.27	0
		1	22	22.37	22.37	22.31	0
		12	0	21.23	21.29	21.10	1
		12	6	22.25	22.24	22.44	0
		12	12	21.09	21.10	21.06	1
24	0	21.23	21.27	21.08	1		
10M	DFT-S 16QAM	1	1	20.84	20.77	20.82	1
10M	DFT-S 64QAM	1	1	19.66	19.55	19.50	2.5
10M	DFT-S 256QAM	1	1	17.45	17.54	17.22	4.5
10M	CP QPSK	1	1	21.96	22.12	21.96	1.5

NR Conducted Power (Full)

NR Band 40_SA




BW	MCS Index	Channel		468000	470000	472000	3GPP MPR
		Frequency (MHz)		2340	2350	2360	
80M	DFT-S PI/2 BPSK	1	1	22.41	22.56	22.72	0
80M	DFT-S QPSK	1	1	22.59	22.73	22.90	0
		1	109	22.39	22.53	22.70	0
		1	215	22.09	22.23	22.40	0
		108	0	22.09	22.23	22.40	1
		108	55	22.47	22.61	22.78	0
		108	109	22.13	22.27	22.44	1
		216	0	22.09	22.23	22.40	1
80M	DFT-S 16QAM	1	1	22.06	22.20	22.37	1
80M	DFT-S 64QAM	1	1	20.03	20.17	20.34	2.5
80M	DFT-S 256QAM	1	1	18.10	18.24	18.41	4.5
80M	CP QPSK	1	1	21.05	21.19	21.36	1.5

NR Conducted Power (Full)							
NR Band 40_SA							
BW	MCS Index	Channel		466000	470000	474000	3GPP MPR
		Frequency (MHz)		2330	2350	2370	
60M	DFT-S PI/2 BPSK	1	1	22.20	22.33	22.61	0
60M	DFT-S QPSK	1	1	22.40	22.54	22.68	0
		1	81	22.25	22.39	22.60	0
		1	160	21.96	22.11	22.20	0
		81	0	21.94	22.21	22.17	1
		81	41	22.27	22.53	22.62	0
		81	81	22.07	22.10	22.38	1
162	0	21.98	22.13	22.25	1		
60M	DFT-S 16QAM	1	1	21.83	22.02	22.30	1
60M	DFT-S 64QAM	1	1	19.89	20.03	20.20	2.5
60M	DFT-S 256QAM	1	1	18.02	18.09	18.37	4.5
60M	CP QPSK	1	1	20.85	21.08	21.28	1.5
BW	MCS Index	Channel		465000	470000	475000	3GPP MPR
		Frequency (MHz)		2325	2350	2375	
50M	DFT-S PI/2 BPSK	1	1	22.37	22.47	22.57	0
50M	DFT-S QPSK	1	1	22.48	22.63	22.75	0
		1	67	22.21	22.46	22.64	0
		1	131	21.98	22.15	22.30	0
		64	0	21.96	22.11	22.35	1
		64	35	22.42	22.53	22.65	0
		64	69	22.03	22.23	22.36	1
128	0	21.91	22.02	22.17	1		
50M	DFT-S 16QAM	1	1	21.98	22.05	22.34	1
50M	DFT-S 64QAM	1	1	19.99	20.02	20.24	2.5
50M	DFT-S 256QAM	1	1	17.96	18.10	18.21	4.5
50M	CP QPSK	1	1	21.00	21.06	21.24	1.5

NR Conducted Power (Full)							
NR Band 40_SA							
BW	MCS Index	Channel		464000	470000	476000	3GPP MPR
		Frequency (MHz)		2320	2350	2380	
40M	DFT-S PI/2 BPSK	1	1	22.27	22.50	22.60	0
40M	DFT-S QPSK	1	1	22.50	22.58	22.76	0
		1	53	22.24	22.39	22.58	0
		1	104	22.01	22.08	22.26	0
		50	0	21.95	22.15	22.22	1
		50	28	22.31	22.48	22.67	0
		50	56	22.00	22.18	22.40	1
		100	0	21.99	22.06	22.28	1
40M	DFT-S 16QAM	1	1	22.02	21.98	22.18	1
40M	DFT-S 64QAM	1	1	19.98	19.95	20.09	2.5
40M	DFT-S 256QAM	1	1	17.96	18.08	18.24	4.5
40M	CP QPSK	1	1	20.90	21.17	21.29	1.5

NR Conducted Power (Full)

NR Band 40_SA



BW	MCS Index	Channel		462000	470000	478000	3GPP MPR
		Frequency (MHz)		2310	2350	2390	
20M	DFT-S PI/2 BPSK	1	1	22.28	22.48	22.54	0
20M	DFT-S QPSK	1	1	22.48	22.66	22.79	0
		1	26	22.15	22.43	22.54	0
		1	49	21.97	22.14	22.38	0
		25	0	21.92	22.04	22.26	1
		25	13	22.34	22.49	22.62	0
		25	26	22.03	22.25	22.28	1
		50	0	21.87	22.04	22.33	1
20M	DFT-S 16QAM	1	1	21.91	21.99	22.26	1
20M	DFT-S 64QAM	1	1	19.95	20.05	20.13	2.5
20M	DFT-S 256QAM	1	1	17.99	18.19	18.23	4.5
20M	CP QPSK	1	1	20.99	21.05	21.23	1.5

NR Conducted Power (Full)							
NR Band 40_SA							
BW	MCS Index	Channel		461500	470000	478500	3GPP MPR
		Frequency (MHz)		2307.5	2350	2392.5	
15M	DFT-S PI/2 BPSK	1	1	22.35	22.45	22.71	0
15M	DFT-S QPSK	1	1	22.50	22.71	22.86	0
		1	19	22.33	22.43	22.57	0
		1	36	22.03	22.16	22.22	0
		18	0	22.02	22.01	22.23	1
		18	10	22.35	22.48	22.61	0
		18	20	22.07	22.22	22.33	1
		36	0	22.02	22.09	22.30	1
15M	DFT-S 16QAM	1	1	21.97	22.12	22.26	1
15M	DFT-S 64QAM	1	1	19.92	20.07	20.20	2.5
15M	DFT-S 256QAM	1	1	17.93	18.15	18.33	4.5
15M	CP QPSK	1	1	20.95	21.16	21.25	1.5
BW	MCS Index	Channel		461000	470000	479000	3GPP MPR
		Frequency (MHz)		2305	2350	2395	
10M	DFT-S PI/2 BPSK	1	1	22.29	22.36	22.59	0
10M	DFT-S QPSK	1	1	22.56	22.57	22.73	0
		1	11	22.22	22.44	22.55	0
		1	22	21.94	22.11	22.26	0
		12	0	22.02	22.03	22.19	1
		12	6	22.43	22.59	22.77	0
		12	12	21.93	22.12	22.29	1
		24	0	21.90	22.15	22.30	1
10M	DFT-S 16QAM	1	1	21.98	22.00	22.17	1
10M	DFT-S 64QAM	1	1	19.93	20.02	20.22	2.5
10M	DFT-S 256QAM	1	1	18.00	18.10	18.30	4.5
10M	CP QPSK	1	1	21.00	20.99	21.26	1.5

NR Conducted Power (Full)									
NR Band 41 PC2_SA									
BW	MCS Index	RB Size	RB Offset	Low	Mid-1	Mid-2	Mid-3	High	3GPP MPR (dB)
		Channel		509202	513900	518598	523302	528000	
		Frequency (MHz)		2546.01	2569.5	2592.99	2616.51	2640	
100M	DFT-S PI/2 BPSK	1	1	26.64	26.65	26.59	26.53	26.91	0
100M	DFT-S QPSK	1	1	26.69	26.73	26.66	26.57	26.93	0
		1	137	26.63	26.64	26.56	26.51	26.85	0
		1	271	26.60	26.63	26.61	26.44	26.81	0
		135	0	25.71	25.75	25.65	25.58	25.91	1
		135	69	26.63	26.73	26.66	26.54	26.86	0
		135	138	25.69	25.75	25.64	25.55	25.86	1
		270	0	25.67	25.73	25.63	25.51	25.81	1
100M	DFT-S 16QAM	1	1	25.65	25.68	25.55	25.44	25.77	1
100M	DFT-S 64QAM	1	1	24.17	24.21	24.11	24.02	24.31	2.5
100M	DFT-S 256QAM	1	1	22.22	22.28	22.13	22.07	22.38	4.5
100M	CP QPSK	1	1	25.18	25.23	25.17	25.11	25.33	1.5
BW	MCS Index	Channel		508200	513402	518598	523800	528996	3GPP MPR
		Frequency (MHz)		2541	2567.01	2592.99	2619	2644.98	
90M	DFT-S PI/2 BPSK	1	1	26.64	26.55	26.57	26.51	26.85	0
90M	DFT-S QPSK	1	1	26.69	26.69	26.59	26.50	26.88	0
		1	123	26.61	26.54	26.48	26.46	26.77	0
		1	243	26.57	26.55	26.55	26.43	26.74	0
		120	0	25.64	25.73	25.65	25.53	25.87	1
		120	63	26.58	26.67	26.61	26.48	26.81	0
		120	125	25.60	25.70	25.55	25.50	25.78	1
		243	0	25.64	25.65	25.61	25.41	25.79	1
90M	DFT-S 16QAM	1	1	25.62	25.63	25.48	25.37	25.87	1
90M	DFT-S 64QAM	1	1	24.09	24.19	24.03	23.96	24.26	2.5
90M	DFT-S 256QAM	1	1	22.16	22.18	22.05	21.97	22.23	4.5
90M	CP QPSK	1	1	25.16	25.16	25.15	25.02	25.38	1.5

NR Conducted Power (Full)									
NR Band 41 PC2_SA									
BW	MCS Index	Channel		507204	509304	518598	500298	529998	3GPP MPR
		Frequency (MHz)		2536.02	2546.52	2592.99	2621.49	2649.99	
80M	DFT-S PI/2 BPSK	1	1	26.62	26.59	26.53	26.53	26.84	0
80M	DFT-S QPSK	1	1	26.65	26.70	26.58	26.55	26.92	0
		1	109	26.61	26.61	26.53	26.44	26.78	0
		1	215	26.50	26.55	26.58	26.41	26.74	0
		108	0	25.70	25.74	25.55	25.56	25.90	1
		108	55	26.62	26.65	26.61	26.47	26.79	0
		108	109	25.60	25.74	25.63	25.47	25.79	1
		216	0	25.66	25.64	25.63	25.47	25.77	1
80M	DFT-S 16QAM	1	1	25.55	25.61	25.46	25.35	25.91	1
80M	DFT-S 64QAM	1	1	24.17	24.21	24.03	23.95	24.25	2.5
80M	DFT-S 256QAM	1	1	22.15	22.18	22.09	22.06	22.22	4.5
80M	CP QPSK	1	1	25.16	25.13	25.14	25.09	25.36	1.5
BW	MCS Index	Channel		506202	512400	518598	524802	531000	3GPP MPR
		Frequency (MHz)		2531.01	2562	2592.99	2624.01	2655	
70M	DFT-S PI/2 BPSK	1	1	26.61	26.64	26.54	26.49	26.85	0
70M	DFT-S QPSK	1	1	26.61	26.70	26.57	26.48	26.90	0
		1	95	26.63	26.58	26.46	26.51	26.83	0
		1	187	26.50	26.56	26.52	26.44	26.77	0
		90	0	25.65	25.67	25.56	25.58	25.76	1
		90	50	26.55	26.72	26.65	26.47	26.85	0
		90	99	25.69	25.68	25.57	25.53	25.83	1
		180	0	25.64	25.72	25.55	25.50	25.77	1
70M	DFT-S 16QAM	1	1	25.65	25.59	25.52	25.37	25.83	1
70M	DFT-S 64QAM	1	1	24.14	24.16	24.02	23.99	24.27	2.5
70M	DFT-S 256QAM	1	1	22.18	22.26	22.10	22.04	22.21	4.5
70M	CP QPSK	1	1	25.09	25.15	25.08	25.02	25.41	1.5

NR Conducted Power (Full)									
NR Band 41 PC2_SA									
BW	MCS Index	Channel		505200	511896	518598	525294	531996	3GPP MPR
		Frequency (MHz)		2526	2559.48	2592.99	2626.48	2659.98	
60M	DFT-S PI/2 BPSK	1	1	26.64	26.56	26.54	26.49	26.84	0
60M	DFT-S QPSK	1	1	26.62	26.67	26.56	26.49	26.84	0
		1	81	26.57	26.58	26.53	26.49	26.82	0
		1	160	26.51	26.62	26.52	26.35	26.78	0
		81	0	25.67	25.66	25.58	25.49	25.91	1
		81	41	26.60	26.71	26.59	26.45	26.82	0
		81	81	25.69	25.65	25.57	25.48	25.77	1
162	0	25.62	25.67	25.60	25.50	25.72	1		
60M	DFT-S 16QAM	1	1	25.60	25.68	25.46	25.42	25.93	1
60M	DFT-S 64QAM	1	1	24.11	24.20	24.09	23.93	24.35	2.5
60M	DFT-S 256QAM	1	1	22.13	22.26	22.06	21.98	22.27	4.5
60M	CP QPSK	1	1	25.11	25.20	25.10	25.03	25.40	1.5
BW	MCS Index	Channel		504204	511404	518598	525798	532998	3GPP MPR
		Frequency (MHz)		2521.02	2557.02	2592.99	2628.99	2664.99	
50M	DFT-S PI/2 BPSK	1	1	26.55	26.58	26.55	26.47	26.84	0
50M	DFT-S QPSK	1	1	26.59	26.73	26.60	26.50	26.91	0
		1	67	26.56	26.61	26.48	26.44	26.79	0
		1	131	26.55	26.61	26.61	26.41	26.77	0
		64	0	25.70	25.74	25.55	25.54	25.85	1
		64	35	26.54	26.68	26.57	26.51	26.80	0
		64	69	25.66	25.66	25.61	25.52	25.78	1
128	0	25.59	25.65	25.53	25.48	25.71	1		
50M	DFT-S 16QAM	1	1	25.61	25.63	25.47	25.40	25.89	1
50M	DFT-S 64QAM	1	1	24.10	24.12	24.06	23.97	24.31	2.5
50M	DFT-S 256QAM	1	1	22.18	22.28	22.03	22.06	22.31	4.5
50M	CP QPSK	1	1	25.10	25.17	25.08	25.02	25.39	1.5

NR Conducted Power (Full)

NR Band 41 PC2_SA

BW	MCS Index	Channel		503202	510900	518598	526296	534000	3GPP MPR
		Frequency (MHz)		2516.01	2554.5	2592.99	2631.48	2670	
40M	DFT-S PI/2 BPSK	1	1	26.58	26.62	26.54	26.52	26.89	0
40M	DFT-S QPSK	1	1	26.65	26.63	26.60	26.47	26.86	0
		1	53	26.56	26.60	26.46	26.48	26.81	0
		1	104	26.55	26.61	26.54	26.40	26.80	0
		50	0	25.65	25.74	25.62	25.50	25.89	1
		50	28	26.57	26.67	26.64	26.51	26.79	0
		50	56	25.60	25.68	25.59	25.46	25.88	1
		100	0	25.66	25.63	25.61	25.43	25.69	1
40M	DFT-S 16QAM	1	1	25.64	25.60	25.45	25.42	25.84	1
40M	DFT-S 64QAM	1	1	24.15	24.15	24.08	24.00	24.31	2.5
40M	DFT-S 256QAM	1	1	22.22	22.23	22.04	22.04	22.25	4.5
40M	CP QPSK	1	1	25.18	25.16	25.10	25.08	25.32	1.5

NR Conducted Power (Full)									
NR Band 41 PC2_SA									
BW	MCS Index	Channel		501204	509898	518598	527298	535998	3GPP MPR
		Frequency (MHz)		2506.02	2549.49	2592.99	2636.49	2679.99	
20M	DFT-S PI/2 BPSK	1	1	26.64	26.61	26.54	26.45	26.91	0
20M	DFT-S QPSK	1	1	26.69	26.71	26.62	26.55	26.86	0
		1	26	26.61	26.59	26.49	26.42	26.76	0
		1	49	26.53	26.61	26.61	26.38	26.75	0
		25	0	25.70	25.71	25.59	25.53	25.85	1
		25	13	26.58	26.69	26.58	26.46	26.81	0
		25	26	25.61	25.72	25.63	25.45	25.84	1
50	0	25.65	25.72	25.62	25.46	25.68	1		
20M	DFT-S 16QAM	1	1	25.61	25.60	25.54	25.37	25.85	1
20M	DFT-S 64QAM	1	1	24.08	24.12	24.05	24.00	24.28	2.5
20M	DFT-S 256QAM	1	1	22.16	22.26	22.06	22.07	22.31	4.5
20M	CP QPSK	1	1	25.12	25.18	25.09	25.06	25.34	1.5
BW	MCS Index	Channel		500700	509646	518598	527544	536496	3GPP MPR
		Frequency (MHz)		2503.5	2548.23	2592.99	2637.72	2682.48	
15M	DFT-S PI/2 BPSK	1	1	26.55	26.55	26.52	26.50	26.85	0
15M	DFT-S QPSK	1	1	26.62	26.64	26.58	26.49	26.83	0
		1	19	26.58	26.56	26.47	26.43	26.79	0
		1	36	26.52	26.60	26.57	26.41	26.75	0
		18	0	25.71	25.65	25.64	25.57	25.88	1
		18	10	26.60	26.72	26.61	26.48	26.81	0
		18	20	25.59	25.75	25.54	25.45	25.86	1
36	0	25.66	25.68	25.60	25.41	25.65	1		
15M	DFT-S 16QAM	1	1	25.63	25.59	25.49	25.41	25.83	1
15M	DFT-S 64QAM	1	1	24.11	24.20	24.05	24.02	24.32	2.5
15M	DFT-S 256QAM	1	1	22.21	22.21	22.03	22.02	22.31	4.5
15M	CP QPSK	1	1	25.18	25.14	25.17	25.05	25.35	1.5

NR Conducted Power (Full)									
NR Band 41 PC2_SA									
BW	MCS Index	Channel		500202	509400	518598	527796	537000	3GPP MPR
		Frequency (MHz)		2501.01	2547	2592.99	2638.98	2685	
10M	DFT-S PI/2 BPSK	1	1	26.62	26.63	26.54	26.53	26.91	0
10M	DFT-S QPSK	1	1	26.61	26.63	26.57	26.55	26.89	0
		1	11	26.56	26.63	26.54	26.49	26.80	0
		1	22	26.51	26.54	26.51	26.44	26.72	0
		12	0	25.65	25.68	25.57	25.54	25.89	1
		12	6	26.58	26.65	26.57	26.48	26.76	0
		12	12	25.67	25.71	25.57	25.52	25.82	1
24	0	25.65	25.68	25.53	25.41	25.64	1		
10M	DFT-S 16QAM	1	1	25.57	25.65	25.46	25.38	25.88	1
10M	DFT-S 64QAM	1	1	24.13	24.16	24.08	23.94	24.25	2.5
10M	DFT-S 256QAM	1	1	22.18	22.27	22.08	21.97	22.30	4.5
10M	CP QPSK	1	1	25.14	25.16	25.14	25.08	25.31	1.5

NR Conducted Power (Full)									
NR Band 41 PC3_SA									
BW	MCS Index	RB Size	RB Offset	Low	Mid-1	Mid-2	Mid-3	High	3GPP MPR (dB)
		Channel		509202	513900	518598	523302	528000	
		Frequency (MHz)		2546.01	2569.5	2592.99	2616.51	2640	
100M	DFT-S PI/2 BPSK	1	1	23.62	23.52	23.48	23.54	23.69	0
100M	DFT-S QPSK	1	1	23.74	23.65	23.61	23.58	23.83	0
		1	137	23.64	23.55	23.51	23.48	23.73	0
		1	271	23.61	23.52	23.48	23.45	23.70	0
		135	0	22.67	22.58	22.54	22.51	22.76	1
		135	69	23.57	23.48	23.44	23.41	23.66	0
		135	138	22.54	22.45	22.41	22.38	22.63	1
		270	0	22.77	22.68	22.64	22.61	22.86	1
100M	DFT-S 16QAM	1	1	22.66	22.57	22.53	22.50	22.75	1
100M	DFT-S 64QAM	1	1	21.27	21.18	21.14	21.11	21.36	2.5
100M	DFT-S 256QAM	1	1	19.35	19.26	19.22	19.19	19.44	4.5
100M	CP QPSK	1	1	22.31	22.22	22.18	22.15	22.40	1.5
BW	MCS Index	Channel		508200	513402	518598	523800	528996	3GPP MPR
		Frequency (MHz)		2541	2567.01	2592.99	2619	2644.98	
90M	DFT-S PI/2 BPSK	1	1	23.59	23.42	23.47	23.50	23.63	0
90M	DFT-S QPSK	1	1	23.72	23.65	23.55	23.58	23.75	0
		1	123	23.64	23.54	23.50	23.41	23.63	0
		1	243	23.53	23.51	23.45	23.40	23.67	0
		120	0	22.59	22.57	22.47	22.45	22.69	1
		120	63	23.50	23.48	23.38	23.34	23.59	0
		120	125	22.53	22.41	22.36	22.30	22.59	1
		243	0	22.73	22.67	22.54	22.56	22.84	1
90M	DFT-S 16QAM	1	1	22.63	22.50	22.46	22.43	22.68	1
90M	DFT-S 64QAM	1	1	21.27	21.12	21.04	21.06	21.28	2.5
90M	DFT-S 256QAM	1	1	19.28	19.20	19.21	19.11	19.38	4.5
90M	CP QPSK	1	1	22.22	22.14	22.14	22.05	22.37	1.5

NR Conducted Power (Full)									
NR Band 41 PC3_SA									
BW	MCS Index	Channel		507204	509304	518598	500298	529998	3GPP MPR
		Frequency (MHz)		2536.02	2546.52	2592.99	2621.49	2649.99	
80M	DFT-S PI/2 BPSK	1	1	23.53	23.43	23.40	23.48	23.61	0
80M	DFT-S QPSK	1	1	23.69	23.60	23.54	23.54	23.76	0
		1	109	23.57	23.48	23.42	23.40	23.69	0
		1	215	23.57	23.45	23.42	23.40	23.68	0
		108	0	22.59	22.51	22.50	22.49	22.74	1
		108	55	23.47	23.46	23.42	23.32	23.65	0
		108	109	22.51	22.39	22.33	22.29	22.63	1
		216	0	22.74	22.60	22.61	22.53	22.85	1
80M	DFT-S 16QAM	1	1	22.61	22.56	22.43	22.43	22.74	1
80M	DFT-S 64QAM	1	1	21.25	21.12	21.07	21.04	21.36	2.5
80M	DFT-S 256QAM	1	1	19.27	19.21	19.16	19.13	19.37	4.5
80M	CP QPSK	1	1	22.22	22.22	22.10	22.14	22.40	1.5
BW	MCS Index	Channel		506202	512400	518598	524802	531000	3GPP MPR
		Frequency (MHz)		2531.01	2562	2592.99	2624.01	2655	
70M	DFT-S PI/2 BPSK	1	1	23.55	23.47	23.45	23.47	23.63	0
70M	DFT-S QPSK	1	1	23.66	23.60	23.53	23.56	23.80	0
		1	95	23.61	23.45	23.51	23.47	23.72	0
		1	187	23.52	23.49	23.42	23.39	23.64	0
		90	0	22.61	22.56	22.47	22.44	22.76	1
		90	50	23.55	23.42	23.36	23.34	23.61	0
		90	99	22.46	22.42	22.41	22.35	22.55	1
		180	0	22.68	22.64	22.62	22.53	22.78	1
70M	DFT-S 16QAM	1	1	22.66	22.57	22.51	22.45	22.69	1
70M	DFT-S 64QAM	1	1	21.27	21.09	21.12	21.11	21.34	2.5
70M	DFT-S 256QAM	1	1	19.25	19.17	19.18	19.11	19.44	4.5
70M	CP QPSK	1	1	22.23	22.19	22.16	22.05	22.40	1.5

NR Conducted Power (Full)									
NR Band 41 PC3_SA									
BW	MCS Index	Channel		505200	511896	518598	525294	531996	3GPP MPR
		Frequency (MHz)		2526	2559.48	2592.99	2626.48	2659.98	
60M	DFT-S PI/2 BPSK	1	1	23.57	23.47	23.43	23.46	23.59	0
60M	DFT-S QPSK	1	1	23.71	23.62	23.54	23.55	23.78	0
		1	81	23.63	23.46	23.50	23.47	23.73	0
		1	160	23.52	23.47	23.42	23.41	23.70	0
		81	0	22.66	22.57	22.45	22.48	22.70	1
		81	41	23.51	23.46	23.36	23.36	23.63	0
		81	81	22.49	22.45	22.33	22.36	22.55	1
162	0	22.73	22.68	22.54	22.56	22.76	1		
60M	DFT-S 16QAM	1	1	22.64	22.57	22.51	22.47	22.66	1
60M	DFT-S 64QAM	1	1	21.19	21.16	21.05	21.04	21.36	2.5
60M	DFT-S 256QAM	1	1	19.32	19.23	19.12	19.13	19.40	4.5
60M	CP QPSK	1	1	22.26	22.22	22.16	22.08	22.37	1.5
BW	MCS Index	Channel		504204	511404	518598	525798	532998	3GPP MPR
		Frequency (MHz)		2521.02	2557.02	2592.99	2628.99	2664.99	
50M	DFT-S PI/2 BPSK	1	1	23.60	23.50	23.45	23.52	23.63	0
50M	DFT-S QPSK	1	1	23.73	23.58	23.52	23.50	23.74	0
		1	67	23.62	23.48	23.44	23.39	23.72	0
		1	131	23.61	23.49	23.48	23.35	23.69	0
		64	0	22.62	22.57	22.53	22.41	22.76	1
		64	35	23.53	23.39	23.36	23.37	23.57	0
		64	69	22.46	22.43	22.35	22.36	22.63	1
128	0	22.68	22.63	22.54	22.59	22.85	1		
50M	DFT-S 16QAM	1	1	22.64	22.56	22.51	22.40	22.73	1
50M	DFT-S 64QAM	1	1	21.19	21.10	21.09	21.09	21.32	2.5
50M	DFT-S 256QAM	1	1	19.26	19.18	19.12	19.12	19.35	4.5
50M	CP QPSK	1	1	22.31	22.14	22.12	22.15	22.39	1.5

NR Conducted Power (Full)

NR Band 41 PC3_SA

BW	MCS Index	Channel		503202	510900	518598	526296	534000	3GPP MPR
		Frequency (MHz)		2516.01	2554.5	2592.99	2631.48	2670	
40M	DFT-S PI/2 BPSK	1	1	23.57	23.52	23.45	23.52	23.62	0
40M	DFT-S QPSK	1	1	23.70	23.56	23.60	23.53	23.79	0
		1	53	23.62	23.47	23.45	23.45	23.66	0
		1	104	23.61	23.43	23.44	23.40	23.62	0
		50	0	22.62	22.54	22.53	22.45	22.66	1
		50	28	23.56	23.38	23.37	23.33	23.58	0
		50	56	22.48	22.41	22.33	22.37	22.58	1
		100	0	22.73	22.65	22.62	22.60	22.78	1
40M	DFT-S 16QAM	1	1	22.57	22.54	22.49	22.41	22.65	1
40M	DFT-S 64QAM	1	1	21.25	21.10	21.05	21.04	21.31	2.5
40M	DFT-S 256QAM	1	1	19.30	19.26	19.16	19.17	19.42	4.5
40M	CP QPSK	1	1	22.30	22.22	22.10	22.10	22.32	1.5

NR Conducted Power (Full)									
NR Band 41 PC3_SA									
BW	MCS Index	Channel		501204	509898	518598	527298	535998	3GPP MPR
		Frequency (MHz)		2506.02	2549.49	2592.99	2636.49	2679.99	
20M	DFT-S PI/2 BPSK	1	1	23.58	23.50	23.41	23.51	23.63	0
20M	DFT-S QPSK	1	1	23.64	23.56	23.61	23.52	23.80	0
		1	26	23.59	23.47	23.41	23.45	23.72	0
		1	49	23.52	23.42	23.39	23.40	23.61	0
		25	0	22.67	22.51	22.52	22.51	22.75	1
		25	13	23.51	23.48	23.34	23.39	23.63	0
		25	26	22.44	22.39	22.38	22.29	22.55	1
50	0	22.68	22.65	22.63	22.59	22.78	1		
20M	DFT-S 16QAM	1	1	22.65	22.51	22.46	22.46	22.70	1
20M	DFT-S 64QAM	1	1	21.23	21.08	21.05	21.09	21.27	2.5
20M	DFT-S 256QAM	1	1	19.28	19.19	19.19	19.11	19.38	4.5
20M	CP QPSK	1	1	22.26	22.13	22.08	22.07	22.39	1.5
BW	MCS Index	Channel		500700	509646	518598	527544	536496	3GPP MPR
		Frequency (MHz)		2503.5	2548.23	2592.99	2637.72	2682.48	
15M	DFT-S PI/2 BPSK	1	1	23.58	23.42	23.48	23.44	23.65	0
15M	DFT-S QPSK	1	1	23.65	23.59	23.57	23.54	23.81	0
		1	19	23.64	23.54	23.42	23.42	23.70	0
		1	36	23.51	23.42	23.47	23.43	23.70	0
		18	0	22.61	22.53	22.44	22.50	22.70	1
		18	10	23.52	23.47	23.43	23.32	23.61	0
		18	20	22.46	22.37	22.40	22.35	22.63	1
36	0	22.70	22.62	22.54	22.52	22.82	1		
15M	DFT-S 16QAM	1	1	22.58	22.47	22.51	22.44	22.67	1
15M	DFT-S 64QAM	1	1	21.18	21.09	21.09	21.05	21.30	2.5
15M	DFT-S 256QAM	1	1	19.35	19.21	19.16	19.16	19.41	4.5
15M	CP QPSK	1	1	22.24	22.20	22.12	22.05	22.34	1.5

NR Conducted Power (Full)									
NR Band 41 PC3_SA									
BW	MCS Index	Channel		500202	509400	518598	527796	537000	3GPP MPR
		Frequency (MHz)		2501.01	2547	2592.99	2638.98	2685	
10M	DFT-S PI/2 BPSK	1	1	23.57	23.52	23.44	23.52	23.59	0
10M	DFT-S QPSK	1	1	23.66	23.60	23.58	23.51	23.74	0
		1	11	23.56	23.45	23.42	23.44	23.65	0
		1	22	23.59	23.48	23.48	23.39	23.70	0
		12	0	22.66	22.52	22.50	22.45	22.74	1
		12	6	23.50	23.46	23.36	23.37	23.62	0
		12	12	22.53	22.42	22.33	22.34	22.59	1
		24	0	22.77	22.59	22.57	22.55	22.79	1
10M	DFT-S 16QAM	1	1	22.58	22.51	22.47	22.42	22.70	1
10M	DFT-S 64QAM	1	1	21.26	21.13	21.13	21.08	21.30	2.5
10M	DFT-S 256QAM	1	1	19.34	19.17	19.19	19.17	19.35	4.5
10M	CP QPSK	1	1	22.24	22.21	22.08	22.05	22.35	1.5

NR Conducted Power (Full)									
NR Band 77 PC2_SA									
BW	MCS Index	RB Size	RB Offset	Low	Mid-1	Mid-2	Mid-3	High	3GPP MPR (dB)
		Channel		650000	653000	656000	659000	662000	
		Frequency (MHz)		3750	3795	3840	3885	3930	
100M	DFT-S PI/2 BPSK	1	1	26.33	26.41	26.51	26.66	26.25	0
100M	DFT-S QPSK	1	1	26.52	26.56	26.61	26.71	26.48	0
		1	137	26.45	26.48	26.51	26.62	26.43	0
		1	271	26.40	26.42	26.47	26.56	26.38	0
		135	0	25.61	25.65	25.70	25.80	25.57	1
		135	69	26.35	26.38	26.40	26.43	26.32	0
		135	138	25.51	25.55	25.60	25.72	25.43	1
100M	DFT-S 16QAM	1	1	25.49	25.52	25.62	25.53	25.48	1
100M	DFT-S 64QAM	1	1	24.34	24.38	24.43	24.49	24.32	2.5
100M	DFT-S 256QAM	1	1	22.36	22.39	22.41	22.43	22.30	4.5
100M	CP QPSK	1	1	25.34	25.36	25.42	25.40	25.32	1.5
BW	MCS Index	Channel		649668	652834	656000	659166	662332	3GPP MPR
		Frequency (MHz)		3745.02	3792.51	3840	3887.49	3934.98	
90M	DFT-S PI/2 BPSK	1	1	26.25	26.38	26.42	26.58	26.19	0
90M	DFT-S QPSK	1	1	26.46	26.50	26.54	26.65	26.42	0
		1	123	26.43	26.44	26.43	26.59	26.33	0
		1	243	26.33	26.33	26.43	26.49	26.33	0
		120	0	25.56	25.57	25.60	25.77	25.52	1
		120	63	26.34	26.35	26.32	26.35	26.30	0
		120	125	25.41	25.52	25.55	25.63	25.36	1
90M	DFT-S 16QAM	1	1	25.47	25.43	25.58	25.51	25.38	1
90M	DFT-S 64QAM	1	1	24.32	24.33	24.38	24.48	24.32	2.5
90M	DFT-S 256QAM	1	1	22.31	22.29	22.32	22.38	22.22	4.5
90M	CP QPSK	1	1	25.32	25.33	25.34	25.38	25.25	1.5

NR Conducted Power (Full)									
NR Band 77 PC2_SA									
BW	MCS Index	Channel		649334	652666	656000	659334	662666	3GPP MPR
		Frequency (MHz)		3740.01	3789.99	3840	3890.01	3939.99	
80M	DFT-S PI/2 BPSK	1	1	26.25	26.32	26.44	26.66	26.20	0
80M	DFT-S QPSK	1	1	26.47	26.48	26.53	26.62	26.42	0
		1	109	26.36	26.38	26.45	26.52	26.34	0
		1	215	26.34	26.37	26.42	26.54	26.37	0
		108	0	25.56	25.55	25.63	25.78	25.50	1
		108	55	26.33	26.37	26.38	26.39	26.32	0
		108	109	25.45	25.46	25.50	25.62	25.41	1
216	0	25.41	25.50	25.57	25.61	25.31	1		
80M	DFT-S 16QAM	1	1	25.41	25.44	25.55	25.46	25.40	1
80M	DFT-S 64QAM	1	1	24.29	24.28	24.40	24.44	24.32	2.5
80M	DFT-S 256QAM	1	1	22.35	22.29	22.31	22.36	22.22	4.5
80M	CP QPSK	1	1	25.26	25.32	25.36	25.39	25.31	1.5
BW	MCS Index	Channel		649000	652500	656000	659500	663000	3GPP MPR
		Frequency (MHz)		3735	3787.5	3840	3892.5	3945	
70M	DFT-S PI/2 BPSK	1	1	26.23	26.31	26.44	26.59	26.24	0
70M	DFT-S QPSK	1	1	26.52	26.54	26.55	26.65	26.39	0
		1	95	26.35	26.43	26.51	26.58	26.41	0
		1	187	26.36	26.38	26.40	26.46	26.38	0
		90	0	25.55	25.56	25.70	25.71	25.49	1
		90	50	26.31	26.37	26.31	26.41	26.32	0
		90	99	25.45	25.54	25.60	25.64	25.34	1
180	0	25.37	25.49	25.55	25.60	25.30	1		
70M	DFT-S 16QAM	1	1	25.40	25.51	25.53	25.50	25.45	1
70M	DFT-S 64QAM	1	1	24.31	24.37	24.39	24.39	24.24	2.5
70M	DFT-S 256QAM	1	1	22.31	22.37	22.40	22.33	22.25	4.5
70M	CP QPSK	1	1	25.33	25.28	25.35	25.36	25.22	1.5

NR Conducted Power (Full)									
NR Band 77 PC2_SA									
BW	MCS Index	Channel		648668	652334	656000	659666	663332	3GPP MPR
		Frequency (MHz)		3730.02	3785.01	3840	3894.99	3949.98	
60M	DFT-S PI/2 BPSK	1	1	26.32	26.36	26.43	26.62	26.16	0
60M	DFT-S QPSK	1	1	26.47	26.54	26.54	26.62	26.48	0
		1	81	26.43	26.42	26.50	26.62	26.43	0
		1	160	26.36	26.38	26.38	26.55	26.37	0
		81	0	25.52	25.64	25.63	25.80	25.47	1
		81	41	26.32	26.36	26.38	26.40	26.31	0
		81	81	25.41	25.45	25.55	25.68	25.40	1
162	0	25.39	25.49	25.54	25.61	25.39	1		
60M	DFT-S 16QAM	1	1	25.48	25.49	25.58	25.44	25.38	1
60M	DFT-S 64QAM	1	1	24.29	24.30	24.43	24.47	24.25	2.5
60M	DFT-S 256QAM	1	1	22.28	22.37	22.36	22.34	22.27	4.5
60M	CP QPSK	1	1	25.31	25.34	25.35	25.36	25.22	1.5
BW	MCS Index	Channel		648334	652166	656000	659834	663666	3GPP MPR
		Frequency (MHz)		3725.01	3782.49	3840	3897.51	3954.99	
50M	DFT-S PI/2 BPSK	1	1	26.31	26.38	26.50	26.59	26.19	0
50M	DFT-S QPSK	1	1	26.50	26.48	26.55	26.63	26.42	0
		1	67	26.44	26.46	26.49	26.54	26.35	0
		1	131	26.35	26.35	26.40	26.48	26.38	0
		64	0	25.51	25.63	25.66	25.74	25.57	1
		64	35	26.26	26.37	26.40	26.43	26.26	0
		64	69	25.51	25.47	25.59	25.68	25.41	1
128	0	25.43	25.48	25.51	25.62	25.36	1		
50M	DFT-S 16QAM	1	1	25.45	25.43	25.58	25.44	25.44	1
50M	DFT-S 64QAM	1	1	24.27	24.29	24.41	24.48	24.29	2.5
50M	DFT-S 256QAM	1	1	22.29	22.39	22.40	22.35	22.29	4.5
50M	CP QPSK	1	1	25.32	25.31	25.36	25.36	25.32	1.5

NR Conducted Power (Full)									
NR Band 77 PC2_SA									
BW	MCS Index	Channel		648000	652000	656000	660000	664000	3GPP MPR
		Frequency (MHz)		3720	3780	3840	3900	3960	
40M	DFT-S PI/2 BPSK	1	1	26.30	26.37	26.48	26.65	26.21	0
40M	DFT-S QPSK	1	1	26.47	26.56	26.59	26.65	26.43	0
		1	53	26.40	26.38	26.50	26.55	26.36	0
		1	104	26.31	26.36	26.38	26.56	26.34	0
		50	0	25.54	25.62	25.69	25.76	25.47	1
		50	28	26.29	26.37	26.39	26.39	26.27	0
		50	56	25.45	25.48	25.54	25.69	25.41	1
100	0	25.42	25.43	25.52	25.59	25.38	1		
40M	DFT-S 16QAM	1	1	25.40	25.49	25.58	25.53	25.47	1
40M	DFT-S 64QAM	1	1	24.34	24.37	24.36	24.46	24.29	2.5
40M	DFT-S 256QAM	1	1	22.28	22.34	22.40	22.41	22.20	4.5
40M	CP QPSK	1	1	25.25	25.31	25.36	25.36	25.31	1.5
BW	MCS Index	Channel		647668	651834	656000	660166	664332	3GPP MPR
		Frequency (MHz)		3715.02	3777.51	3840	3902.49	3964.98	
30M	DFT-S PI/2 BPSK	1	1	26.26	26.33	26.45	26.56	26.17	0
30M	DFT-S QPSK	1	1	26.45	26.49	26.56	26.60	26.40	0
		1	39	26.42	26.40	26.43	26.52	26.33	0
		1	76	26.35	26.39	26.43	26.47	26.28	0
		36	0	25.57	25.63	25.63	25.70	25.52	1
		36	21	26.34	26.31	26.40	26.41	26.26	0
		36	42	25.43	25.46	25.53	25.72	25.33	1
75	0	25.42	25.43	25.51	25.55	25.32	1		
30M	DFT-S 16QAM	1	1	25.45	25.43	25.54	25.52	25.41	1
30M	DFT-S 64QAM	1	1	24.32	24.32	24.38	24.44	24.22	2.5
30M	DFT-S 256QAM	1	1	22.36	22.39	22.37	22.38	22.25	4.5
30M	CP QPSK	1	1	25.33	25.29	25.41	25.36	25.27	1.5

NR Conducted Power (Full)

NR Band 77 PC2_SA

BW	MCS Index	Channel		647334	651666	656000	660266	664666	3GPP MPR
		Frequency (MHz)		3710.01	3774.99	3840	3903.99	3969.99	
20M	DFT-S PI/2 BPSK	1	1	26.23	26.36	26.42	26.61	26.16	0
20M	DFT-S QPSK	1	1	26.43	26.56	26.52	26.63	26.45	0
		1	26	26.43	26.42	26.51	26.60	26.41	0
		1	49	26.32	26.40	26.38	26.50	26.28	0
		25	0	25.59	25.63	25.67	25.80	25.53	1
		25	13	26.28	26.31	26.39	26.41	26.24	0
		25	26	25.51	25.49	25.57	25.62	25.33	1
20M	DFT-S 16QAM	1	1	25.46	25.45	25.52	25.43	25.44	1
20M	DFT-S 64QAM	1	1	24.25	24.31	24.41	24.39	24.27	2.5
20M	DFT-S 256QAM	1	1	22.33	22.35	22.32	22.42	22.22	4.5
20M	CP QPSK	1	1	25.34	25.29	25.40	25.31	25.28	1.5

NR Conducted Power (Full)									
NR Band 77 PC2_SA									
BW	MCS Index	Channel		647168	651584	656000	660416	664832	3GPP MPR
		Frequency (MHz)		3707.52	3773.76	3840	3906.24	3972.48	
15M	DFT-S PI/2 BPSK	1	1	26.27	26.41	26.48	26.65	26.16	0
15M	DFT-S QPSK	1	1	26.42	26.48	26.59	26.65	26.45	0
		1	19	26.44	26.43	26.48	26.59	26.40	0
		1	36	26.36	26.36	26.40	26.50	26.30	0
		18	0	25.59	25.57	25.66	25.72	25.50	1
		18	10	26.35	26.36	26.38	26.35	26.28	0
		18	20	25.42	25.45	25.57	25.66	25.34	1
36	0	25.34	25.47	25.55	25.59	25.34	1		
15M	DFT-S 16QAM	1	1	25.39	25.42	25.60	25.52	25.42	1
15M	DFT-S 64QAM	1	1	24.31	24.34	24.41	24.42	24.26	2.5
15M	DFT-S 256QAM	1	1	22.32	22.32	22.35	22.33	22.21	4.5
15M	CP QPSK	1	1	25.25	25.34	25.39	25.34	25.26	1.5
BW	MCS Index	Channel		647000	651500	656000	660500	665000	3GPP MPR
		Frequency (MHz)		3705	3772.5	3840	3907.5	3975	
10M	DFT-S PI/2 BPSK	1	1	26.27	26.39	26.43	26.62	26.15	0
10M	DFT-S QPSK	1	1	26.44	26.49	26.53	26.66	26.48	0
		1	11	26.45	26.48	26.50	26.62	26.38	0
		1	22	26.39	26.33	26.37	26.51	26.33	0
		12	0	25.52	25.59	25.66	25.73	25.51	1
		12	6	26.26	26.31	26.38	26.39	26.30	0
		12	12	25.47	25.53	25.55	25.62	25.38	1
24	0	25.33	25.42	25.53	25.53	25.34	1		
10M	DFT-S 16QAM	1	1	25.45	25.50	25.59	25.51	25.39	1
10M	DFT-S 64QAM	1	1	24.24	24.31	24.34	24.43	24.27	2.5
10M	DFT-S 256QAM	1	1	22.26	22.35	22.33	22.33	22.26	4.5
10M	CP QPSK	1	1	25.32	25.28	25.33	25.34	25.31	1.5

NR Conducted Power (Full)									
NR Band 77 PC3_SA									
BW	MCS Index	RB Size	RB Offset	Low	Mid-1	Mid-2	Mid-3	High	3GPP MPR (dB)
		Channel		650000	653000	656000	659000	662000	
		Frequency (MHz)		3750	3795	3840	3885	3930	
100M	DFT-S PI/2 BPSK	1	1	22.98	22.81	23.95	23.02	23.12	0
100M	DFT-S QPSK	1	1	23.03	22.82	23.98	23.09	23.22	0
		1	137	22.98	23.02	23.89	22.98	23.08	0
		1	271	22.98	22.89	23.35	23.04	23.07	0
		135	0	22.80	22.88	22.76	22.84	22.85	1
		135	69	22.79	22.73	23.92	22.82	22.83	0
		135	138	22.81	22.73	22.95	22.86	22.92	1
100M	DFT-S 16QAM	1	1	22.02	21.95	22.11	22.21	22.98	1
100M	DFT-S 64QAM	1	1	20.45	21.25	20.83	20.51	21.39	2.5
100M	DFT-S 256QAM	1	1	18.48	18.45	18.73	18.48	18.77	4.5
100M	CP QPSK	1	1	22.25	22.34	22.05	22.27	22.25	1.5
BW	MCS Index	Channel		649668	652834	656000	659166	662332	3GPP MPR
		Frequency (MHz)		3745.02	3792.51	3840	3887.49	3934.98	
90M	DFT-S PI/2 BPSK	1	1	22.90	22.81	23.94	23.02	23.03	0
90M	DFT-S QPSK	1	1	22.98	22.79	23.88	23.07	23.17	0
		1	123	22.92	22.94	23.86	22.98	23.06	0
		1	243	22.91	22.83	23.29	22.98	22.98	0
		120	0	22.80	22.86	22.70	22.78	22.81	1
		120	63	22.78	22.65	23.82	22.80	22.80	0
		120	125	22.78	22.69	22.90	22.81	22.89	1
90M	DFT-S 16QAM	1	1	21.98	21.73	22.95	22.08	22.17	1
90M	DFT-S 64QAM	1	1	20.42	20.50	21.30	20.41	20.58	2.5
90M	DFT-S 256QAM	1	1	18.46	18.37	18.85	18.52	18.52	4.5
90M	CP QPSK	1	1	22.28	22.30	22.21	22.32	22.29	1.5


NR Conducted Power (Full)									
NR Band 77 PC3_SA									
BW	MCS Index	Channel		649334	652666	656000	659334	662666	3GPP MPR
		Frequency (MHz)		3740.01	3789.99	3840	3890.01	3939.99	
80M	DFT-S PI/2 BPSK	1	1	22.88	22.77	23.78	23.00	22.94	0
80M	DFT-S QPSK	1	1	23.00	22.74	23.92	22.93	23.06	0
		1	109	22.85	22.94	23.77	22.89	23.06	0
		1	215	22.81	22.81	23.25	22.98	22.93	0
		108	0	22.68	22.73	22.75	22.68	22.83	1
		108	55	22.72	22.60	23.82	22.79	22.73	0
		108	109	22.74	22.65	22.87	22.75	22.79	1
216	0	21.86	21.78	22.81	22.00	22.02	1		
80M	DFT-S 16QAM	1	1	21.93	21.70	22.93	21.96	22.12	1
80M	DFT-S 64QAM	1	1	20.39	20.48	21.27	20.40	20.50	2.5
80M	DFT-S 256QAM	1	1	18.38	18.30	18.79	18.41	18.50	4.5
80M	CP QPSK	1	1	22.18	22.28	22.21	22.21	22.24	1.5
BW	MCS Index	Channel		649000	652500	656000	659500	663000	3GPP MPR
		Frequency (MHz)		3735	3787.5	3840	3892.5	3945	
70M	DFT-S PI/2 BPSK	1	1	22.81	22.73	23.79	22.91	22.95	0
70M	DFT-S QPSK	1	1	22.97	22.80	23.80	23.00	23.15	0
		1	95	22.91	22.83	23.83	22.91	22.99	0
		1	187	22.86	22.73	23.22	22.96	22.94	0
		90	0	22.76	22.77	22.66	22.67	22.76	1
		90	50	22.66	22.63	23.77	22.69	22.75	0
		90	99	22.64	22.58	22.86	22.80	22.85	1
180	0	21.79	21.77	22.82	21.97	22.03	1		
70M	DFT-S 16QAM	1	1	21.92	21.79	22.82	22.00	22.14	1
70M	DFT-S 64QAM	1	1	20.41	20.36	21.36	20.44	20.51	2.5
70M	DFT-S 256QAM	1	1	18.43	18.25	18.78	18.43	18.44	4.5
70M	CP QPSK	1	1	22.25	22.23	22.22	22.17	22.28	1.5

NR Conducted Power (Full)									
NR Band 77 PC3_SA									
BW	MCS Index	Channel		648668	652334	656000	659666	663332	3GPP MPR
		Frequency (MHz)		3730.02	3785.01	3840	3894.99	3949.98	
60M	DFT-S PI/2 BPSK	1	1	22.81	22.70	23.86	22.81	22.94	0
60M	DFT-S QPSK	1	1	22.93	22.64	23.85	22.90	23.08	0
		1	81	22.90	22.95	23.71	22.80	22.95	0
		1	160	22.71	22.75	23.11	22.88	22.97	0
		81	0	22.67	22.73	22.66	22.63	22.70	1
		81	41	22.63	22.61	23.81	22.67	22.69	0
		81	81	22.61	22.62	22.86	22.70	22.80	1
162	0	21.72	21.76	22.85	21.86	21.94	1		
60M	DFT-S 16QAM	1	1	21.85	21.64	22.85	21.89	22.11	1
60M	DFT-S 64QAM	1	1	20.31	20.43	21.23	20.31	20.46	2.5
60M	DFT-S 256QAM	1	1	18.21	18.29	18.63	18.39	18.46	4.5
60M	CP QPSK	1	1	22.13	22.26	22.16	22.20	22.24	1.5
BW	MCS Index	Channel		648334	652166	656000	659834	663666	3GPP MPR
		Frequency (MHz)		3725.01	3782.49	3840	3897.51	3954.99	
50M	DFT-S PI/2 BPSK	1	1	22.73	22.65	23.86	22.80	22.95	0
50M	DFT-S QPSK	1	1	22.82	22.60	23.86	22.90	23.02	0
		1	67	22.73	22.79	23.74	22.75	22.88	0
		1	131	22.80	22.79	23.05	22.80	22.93	0
		64	0	22.63	22.69	22.62	22.59	22.57	1
		64	35	22.58	22.48	23.78	22.64	22.71	0
		64	69	22.52	22.52	22.85	22.69	22.73	1
128	0	21.75	21.69	22.84	21.78	21.96	1		
50M	DFT-S 16QAM	1	1	21.82	21.65	22.76	21.89	22.10	1
50M	DFT-S 64QAM	1	1	20.23	20.34	21.23	20.19	20.39	2.5
50M	DFT-S 256QAM	1	1	18.29	18.25	18.52	18.30	18.41	4.5
50M	CP QPSK	1	1	22.20	22.15	22.14	22.17	22.13	1.5

NR Conducted Power (Full)									
NR Band 77 PC3_SA									
BW	MCS Index	Channel		648000	652000	656000	660000	664000	3GPP MPR
		Frequency (MHz)		3720	3780	3840	3900	3960	
40M	DFT-S PI/2 BPSK	1	1	22.68	22.64	23.77	22.84	22.95	0
40M	DFT-S QPSK	1	1	22.87	22.61	23.73	22.88	22.99	0
		1	53	22.88	22.89	23.63	22.77	22.96	0
		1	104	22.65	22.70	23.12	22.86	22.97	0
		50	0	22.59	22.71	22.69	22.57	22.63	1
		50	28	22.54	22.48	23.74	22.60	22.70	0
		50	56	22.61	22.54	22.75	22.64	22.71	1
100	0	21.75	21.72	22.85	21.79	21.89	1		
40M	DFT-S 16QAM	1	1	21.88	21.61	22.79	21.84	22.00	1
40M	DFT-S 64QAM	1	1	20.31	20.39	21.09	20.30	20.47	2.5
40M	DFT-S 256QAM	1	1	18.25	18.26	18.64	18.41	18.41	4.5
40M	CP QPSK	1	1	22.15	22.21	22.10	22.02	22.11	1.5
BW	MCS Index	Channel		647668	651834	656000	660166	664332	3GPP MPR
		Frequency (MHz)		3715.02	3777.51	3840	3902.49	3964.98	
30M	DFT-S PI/2 BPSK	1	1	22.71	22.70	23.80	22.77	22.95	0
30M	DFT-S QPSK	1	1	22.81	22.60	23.77	22.89	23.02	0
		1	39	22.83	22.86	23.63	22.71	22.95	0
		1	76	22.63	22.65	23.03	22.88	22.85	0
		36	0	22.72	22.70	22.61	22.56	22.68	1
		36	21	22.61	22.54	23.69	22.64	22.56	0
		36	42	22.64	22.65	22.76	22.65	22.81	1
75	0	21.73	21.71	22.79	21.78	21.98	1		
30M	DFT-S 16QAM	1	1	21.87	21.55	22.72	21.89	22.00	1
30M	DFT-S 64QAM	1	1	20.30	20.35	21.13	20.27	20.45	2.5
30M	DFT-S 256QAM	1	1	18.21	18.17	18.54	18.41	18.36	4.5
30M	CP QPSK	1	1	22.15	22.21	22.12	22.02	22.11	1.5

NR Conducted Power (Full)

NR Band 77 PC3_SA



BW	MCS Index	Channel		647334	651666	656000	660266	664666	3GPP MPR
		Frequency (MHz)		3710.01	3774.99	3840	3903.99	3969.99	
20M	DFT-S PI/2 BPSK	1	1	22.68	22.71	23.74	22.74	22.93	0
20M	DFT-S QPSK	1	1	22.85	22.50	23.71	22.86	23.07	0
		1	26	22.73	22.77	23.51	22.63	22.91	0
		1	49	22.64	22.65	23.03	22.84	22.82	0
		25	0	22.72	22.58	22.64	22.47	22.62	1
		25	13	22.54	22.40	23.67	22.57	22.47	0
		25	26	22.55	22.56	22.74	22.59	22.72	1
20M	DFT-S 16QAM	1	1	21.84	21.49	22.64	21.87	22.04	1
20M	DFT-S 64QAM	1	1	20.27	20.35	21.03	20.10	20.37	2.5
20M	DFT-S 256QAM	1	1	18.14	18.10	18.57	18.28	18.26	4.5
20M	CP QPSK	1	1	22.15	22.12	22.11	22.00	22.04	1.5

NR Conducted Power (Full)									
NR Band 77 PC3_SA									
BW	MCS Index	Channel		647168	651584	656000	660416	664832	3GPP MPR
		Frequency (MHz)		3707.52	3773.76	3840	3906.24	3972.48	
15M	DFT-S PI/2 BPSK	1	1	22.66	22.69	23.82	22.83	22.97	0
15M	DFT-S QPSK	1	1	22.86	22.62	23.72	22.89	23.08	0
		1	19	22.89	22.90	23.59	22.70	22.93	0
		1	36	22.70	22.69	23.10	22.90	22.84	0
		18	0	22.71	22.71	22.65	22.53	22.66	1
		18	10	22.56	22.52	23.74	22.67	22.60	0
		18	20	22.59	22.60	22.82	22.62	22.75	1
36	0	21.73	21.72	22.78	21.73	21.94	1		
15M	DFT-S 16QAM	1	1	21.78	21.57	22.69	21.87	22.10	1
15M	DFT-S 64QAM	1	1	20.33	20.37	21.08	20.21	20.45	2.5
15M	DFT-S 256QAM	1	1	18.18	18.14	18.56	18.33	18.35	4.5
15M	CP QPSK	1	1	22.18	22.14	22.16	22.04	22.08	1.5
BW	MCS Index	Channel		647000	651500	656000	660500	665000	3GPP MPR
		Frequency (MHz)		3705	3772.5	3840	3907.5	3975	
10M	DFT-S PI/2 BPSK	1	1	22.62	22.61	23.68	22.77	22.89	0
10M	DFT-S QPSK	1	1	22.75	22.56	23.69	22.84	22.93	0
		1	11	22.80	22.85	23.65	22.70	22.87	0
		1	22	22.65	22.66	23.02	22.84	22.76	0
		12	0	22.63	22.63	22.55	22.45	22.53	1
		12	6	22.58	22.50	23.57	22.60	22.59	0
		12	12	22.62	22.63	22.77	22.60	22.81	1
24	0	21.57	21.62	22.73	21.82	21.88	1		
10M	DFT-S 16QAM	1	1	21.78	21.59	22.74	21.79	22.01	1
10M	DFT-S 64QAM	1	1	20.31	20.35	21.17	20.21	20.38	2.5
10M	DFT-S 256QAM	1	1	18.12	18.16	18.54	18.31	18.23	4.5
10M	CP QPSK	1	1	22.11	22.12	22.08	22.03	22.05	1.5

NR Conducted Power (Full)							
NR Band 78 PC2_SA							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel			650000		
		Frequency (MHz)			3750		
100M	DFT-S PI/2 BPSK	1	1		26.63		0
100M	DFT-S QPSK	1	1		26.70		0
		1	137		26.68		0
		1	271		26.55		0
		135	0		25.68		1
		135	69		26.67		0
		135	138		26.58		1
		270	0		26.51		1
100M	DFT-S 16QAM	1	1		25.84		1
100M	DFT-S 64QAM	1	1		24.22		2.5
100M	DFT-S 256QAM	1	1		22.19		4.5
100M	CP QPSK	1	1		25.23		1.5
BW	MCS Index	Channel		649668	650000	650332	3GPP MPR
		Frequency (MHz)		3745.02	3750	3754.98	
90M	DFT-S PI/2 BPSK	1	1	26.52	26.54	26.46	0
90M	DFT-S QPSK	1	1	26.64	26.66	26.61	0
		1	123	26.67	26.68	26.65	0
		1	243	26.42	26.45	26.39	0
		120	0	25.57	25.60	25.57	1
		120	63	26.54	26.62	26.48	0
		120	125	26.50	26.55	26.47	1
		243	0	26.44	26.44	26.38	1
90M	DFT-S 16QAM	1	1	25.74	25.82	25.71	1
90M	DFT-S 64QAM	1	1	24.20	24.21	24.11	2.5
90M	DFT-S 256QAM	1	1	22.07	22.17	22.01	4.5
90M	CP QPSK	1	1	25.12	25.13	25.10	1.5

NR Conducted Power (Full)							
NR Band 78 PC2_SA							
BW	MCS Index	Channel		649334	650000	650666	3GPP MPR
		Frequency (MHz)		3740.01	3750	3759.99	
80M	DFT-S PI/2 BPSK	1	1	26.42	26.52	26.45	0
80M	DFT-S QPSK	1	1	26.55	26.62	26.60	0
		1	109	26.58	26.60	26.65	0
		1	215	26.38	26.39	26.29	0
		108	0	25.51	25.52	25.57	1
		108	55	26.52	26.57	26.44	0
		108	109	26.42	26.51	26.39	1
		216	0	26.37	26.36	26.37	1
80M	DFT-S 16QAM	1	1	25.64	25.74	25.68	1
80M	DFT-S 64QAM	1	1	24.10	24.19	24.04	2.5
80M	DFT-S 256QAM	1	1	21.97	22.17	21.95	4.5
80M	CP QPSK	1	1	25.09	25.09	25.03	1.5
BW	MCS Index	Channel		649000	650000	651000	3GPP MPR
		Frequency (MHz)		3735	3750	3765	
70M	DFT-S PI/2 BPSK	1	1	26.51	26.53	26.45	0
70M	DFT-S QPSK	1	1	26.57	26.65	26.59	0
		1	95	26.63	26.65	26.57	0
		1	187	26.39	26.42	26.32	0
		90	0	25.52	25.58	25.51	1
		90	50	26.52	26.62	26.38	0
		90	99	26.47	26.45	26.38	1
		180	0	26.40	26.40	26.29	1
70M	DFT-S 16QAM	1	1	25.74	25.82	25.67	1
70M	DFT-S 64QAM	1	1	24.20	24.21	24.04	2.5
70M	DFT-S 256QAM	1	1	22.03	22.07	22.00	4.5
70M	CP QPSK	1	1	25.07	25.08	25.09	1.5

NR Conducted Power (Full)							
NR Band 78 PC2_SA							
BW	MCS Index	Channel		648668	650000	651332	3GPP MPR
		Frequency (MHz)		3730.02	3750	3769.98	
60M	DFT-S PI/2 BPSK	1	1	26.47	26.46	26.38	0
60M	DFT-S QPSK	1	1	26.63	26.58	26.58	0
		1	81	26.62	26.59	26.57	0
		1	160	26.34	26.42	26.34	0
		81	0	25.52	25.50	25.55	1
		81	41	26.50	26.60	26.40	0
		81	81	26.46	26.49	26.40	1
60M	DFT-S 16QAM	1	1	26.38	26.39	26.31	1
60M	DFT-S 64QAM	1	1	25.74	25.73	25.63	1
60M	DFT-S 256QAM	1	1	24.13	24.19	24.01	2.5
60M	DFT-S 256QAM	1	1	22.05	22.16	21.95	4.5
60M	CP QPSK	1	1	25.06	25.06	25.10	1.5
BW	MCS Index	Channel		648334	650000	651666	3GPP MPR
		Frequency (MHz)		3725.01	3750	3774.99	
50M	DFT-S PI/2 BPSK	1	1	26.48	26.53	26.40	0
50M	DFT-S QPSK	1	1	26.54	26.66	26.52	0
		1	67	26.57	26.68	26.64	0
		1	131	26.35	26.45	26.30	0
		64	0	25.52	25.58	25.55	1
		64	35	26.51	26.58	26.48	0
		64	69	26.48	26.46	26.45	1
50M	DFT-S 16QAM	128	0	26.41	26.36	26.34	1
50M	DFT-S 16QAM	1	1	25.68	25.82	25.71	1
50M	DFT-S 64QAM	1	1	24.13	24.13	24.02	2.5
50M	DFT-S 256QAM	1	1	21.99	22.17	21.98	4.5
50M	CP QPSK	1	1	25.12	25.12	25.01	1.5

NR Conducted Power (Full)							
NR Band 78 PC2_SA							
BW	MCS Index	Channel		648000	650000	652000	3GPP MPR
		Frequency (MHz)		3720	3750	3780	
40M	DFT-S PI/2 BPSK	1	1	26.46	26.44	26.36	0
40M	DFT-S QPSK	1	1	26.62	26.62	26.53	0
		1	49	26.60	26.64	26.57	0
		1	104	26.32	26.36	26.29	0
		50	0	25.53	25.57	25.50	1
		50	28	26.45	26.56	26.42	0
		50	56	26.49	26.49	26.42	1
100	0	26.35	26.35	26.28	1		
40M	DFT-S 16QAM	1	1	25.70	25.73	25.66	1
40M	DFT-S 64QAM	1	1	24.15	24.15	24.03	2.5
40M	DFT-S 256QAM	1	1	22.01	22.11	21.98	4.5
40M	CP QPSK	1	1	25.03	25.06	25.10	1.5
BW	MCS Index	Channel		647668	650000	652332	3GPP MPR
		Frequency (MHz)		3715.02	3750	3784.98	
30M	DFT-S PI/2 BPSK	1	1	26.44	26.47	26.45	0
30M	DFT-S QPSK	1	1	26.60	26.58	26.59	0
		1	39	26.62	26.68	26.61	0
		1	76	26.39	26.37	26.32	0
		36	0	25.48	25.60	25.55	1
		36	21	26.54	26.52	26.46	0
		36	42	26.44	26.47	26.39	1
75	0	26.44	26.34	26.37	1		
30M	DFT-S 16QAM	1	1	25.66	25.82	25.68	1
30M	DFT-S 64QAM	1	1	24.20	24.21	24.07	2.5
30M	DFT-S 256QAM	1	1	22.06	22.14	21.95	4.5
30M	CP QPSK	1	1	25.05	25.07	25.07	1.5

NR Conducted Power (Full)

NR Band 78 PC2_SA

BW	MCS Index	Channel		647334	650000	652666	3GPP MPR
		Frequency (MHz)		3710.01	3750	3789.99	
20M	DFT-S PI/2 BPSK	1	1	26.47	26.49	26.43	0
20M	DFT-S QPSK	1	1	26.55	26.66	26.51	0
		1	26	26.62	26.67	26.64	0
		1	49	26.32	26.45	26.31	0
		25	0	25.49	25.56	25.53	1
		25	13	26.50	26.58	26.45	0
		25	26	26.40	26.46	26.43	1
		50	0	26.43	26.40	26.35	1
20M	DFT-S 16QAM	1	1	25.74	25.79	25.63	1
20M	DFT-S 64QAM	1	1	24.16	24.16	24.08	2.5
20M	DFT-S 256QAM	1	1	22.06	22.07	21.93	4.5
20M	CP QPSK	1	1	25.04	25.13	25.00	1.5

NR Conducted Power (Full)							
NR Band 78 PC2_SA							
BW	MCS Index	Channel		647168	650000	652832	3GPP MPR
		Frequency (MHz)		3707.52	3750	3792.48	
15M	DFT-S PI/2 BPSK	1	1	26.46	26.51	26.37	0
15M	DFT-S QPSK	1	1	26.59	26.61	26.60	0
		1	19	26.63	26.67	26.56	0
		1	36	26.35	26.38	26.39	0
		18	0	25.52	25.60	25.56	1
		18	10	26.50	26.53	26.46	0
		18	20	26.50	26.50	26.38	1
		36	0	26.44	26.34	26.31	1
15M	DFT-S 16QAM	1	1	25.73	25.81	25.66	1
15M	DFT-S 64QAM	1	1	24.16	24.15	24.04	2.5
15M	DFT-S 256QAM	1	1	22.06	22.15	21.91	4.5
15M	CP QPSK	1	1	25.12	25.13	25.03	1.5
BW	MCS Index	Channel		647000	650000	653000	3GPP MPR
		Frequency (MHz)		3705	3750	3795	
10M	DFT-S PI/2 BPSK	1	1	26.44	26.53	26.38	0
10M	DFT-S QPSK	1	1	26.62	26.65	26.57	0
		1	11	26.67	26.67	26.55	0
		1	22	26.32	26.43	26.32	0
		12	0	25.47	25.53	25.53	1
		12	6	26.47	26.56	26.43	0
		12	12	26.48	26.47	26.42	1
		24	0	26.36	26.36	26.30	1
10M	DFT-S 16QAM	1	1	25.70	25.74	25.61	1
10M	DFT-S 64QAM	1	1	24.12	24.13	24.03	2.5
10M	DFT-S 256QAM	1	1	22.00	22.09	21.93	4.5
10M	CP QPSK	1	1	25.04	25.06	25.04	1.5

NR Conducted Power (Full)							
NR Band 78 PC3_SA							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel			650000		
		Frequency (MHz)			3750		
100M	DFT-S PI/2 BPSK	1	1		22.62		0
100M	DFT-S QPSK	1	1		23.03		0
		1	137		23.01		0
		1	271		22.71		0
		135	0		22.54		1
		135	69		23.00		0
		135	138		22.91		1
		270	0		22.84		1
100M	DFT-S 16QAM	1	1		22.17		1
100M	DFT-S 64QAM	1	1		20.55		2.5
100M	DFT-S 256QAM	1	1		18.52		4.5
100M	CP QPSK	1	1		21.99		1.5
BW	MCS Index	Channel		649668	650000	650332	3GPP MPR
		Frequency (MHz)		3745.02	3750	3754.98	
90M	DFT-S PI/2 BPSK	1	1	22.69	22.67	22.51	0
90M	DFT-S QPSK	1	1	23.01	23.00	22.94	0
		1	123	22.96	22.95	22.89	0
		1	243	22.94	22.93	22.87	0
		120	0	22.85	22.84	22.78	1
		120	63	22.99	22.98	22.92	0
		120	125	22.92	22.91	22.85	1
		243	0	22.91	22.90	22.84	1
90M	DFT-S 16QAM	1	1	22.38	22.37	22.31	1
90M	DFT-S 64QAM	1	1	20.52	20.51	20.48	2.5
90M	DFT-S 256QAM	1	1	18.40	18.39	18.33	4.5
90M	CP QPSK	1	1	22.18	22.17	22.11	1.5

NR Conducted Power (Full)							
NR Band 78 PC3_SA							
BW	MCS Index	Channel		649334	650000	650666	3GPP MPR
		Frequency (MHz)		3740.01	3750	3759.99	
80M	DFT-S PI/2 BPSK	1	1	22.69	22.60	22.46	0
80M	DFT-S QPSK	1	1	22.94	23.00	22.89	0
		1	109	22.90	22.86	22.86	0
		1	215	22.84	22.84	22.80	0
		108	0	22.79	22.75	22.71	1
		108	55	22.94	22.98	22.91	0
		108	109	22.87	22.89	22.79	1
		216	0	22.88	22.85	22.74	1
80M	DFT-S 16QAM	1	1	22.33	22.31	22.24	1
80M	DFT-S 64QAM	1	1	20.45	20.49	20.43	2.5
80M	DFT-S 256QAM	1	1	18.31	18.38	18.26	4.5
80M	CP QPSK	1	1	22.12	22.11	22.07	1.5
BW	MCS Index	Channel		649000		651000	3GPP MPR
		Frequency (MHz)		3735		3765	
70M	DFT-S PI/2 BPSK	1	1	22.60		22.50	0
70M	DFT-S QPSK	1	1	22.95		22.89	0
		1	95	22.86		22.85	0
		1	187	22.90		22.79	0
		90	0	22.75		22.72	1
		90	50	22.99		22.84	0
		90	99	22.83		22.77	1
		180	0	22.86		22.78	1
70M	DFT-S 16QAM	1	1	22.33		22.22	1
70M	DFT-S 64QAM	1	1	20.50		20.47	2.5
70M	DFT-S 256QAM	1	1	18.39		18.28	4.5
70M	CP QPSK	1	1	22.11		22.06	1.5

NR Conducted Power (Full)							
NR Band 78 PC3_SA							
BW	MCS Index	Channel		648668	650000	651332	3GPP MPR
		Frequency (MHz)		3730.02	3750	3769.98	
60M	DFT-S PI/2 BPSK	1	1	22.68	22.57	22.41	0
60M	DFT-S QPSK	1	1	22.92	22.96	22.92	0
		1	81	22.89	22.87	22.81	0
		1	160	22.93	22.85	22.78	0
		81	0	22.82	22.84	22.68	1
		81	41	22.91	22.94	22.84	0
		81	81	22.83	22.89	22.80	1
		162	0	22.85	22.86	22.77	1
60M	DFT-S 16QAM	1	1	22.28	22.35	22.26	1
60M	DFT-S 64QAM	1	1	20.50	20.48	20.39	2.5
60M	DFT-S 256QAM	1	1	18.33	18.37	18.23	4.5
60M	CP QPSK	1	1	22.08	22.10	22.08	1.5
BW	MCS Index	Channel		648334	650000	651666	3GPP MPR
		Frequency (MHz)		3725.01	3750	3774.99	
50M	DFT-S PI/2 BPSK	1	1	22.66	22.60	22.41	0
50M	DFT-S QPSK	1	1	22.98	22.99	22.91	0
		1	67	22.87	22.93	22.83	0
		1	131	22.92	22.91	22.77	0
		64	0	22.79	22.76	22.73	1
		64	35	22.92	22.88	22.82	0
		64	69	22.86	22.82	22.77	1
		128	0	22.84	22.86	22.76	1
50M	DFT-S 16QAM	1	1	22.36	22.32	22.31	1
50M	DFT-S 64QAM	1	1	20.46	20.42	20.45	2.5
50M	DFT-S 256QAM	1	1	18.35	18.38	18.31	4.5
50M	CP QPSK	1	1	22.15	22.12	22.03	1.5

NR Conducted Power (Full)							
NR Band 78 PC3_SA							
BW	MCS Index	Channel		648000	650000	652000	3GPP MPR
		Frequency (MHz)		3720	3750	3780	
40M	DFT-S PI/2 BPSK	1	1	22.68	22.63	22.43	0
40M	DFT-S QPSK	1	1	22.94	22.91	22.87	0
		1	49	22.87	22.94	22.79	0
		1	104	22.84	22.93	22.84	0
		50	0	22.76	22.82	22.77	1
		50	28	22.91	22.90	22.89	0
		50	56	22.92	22.81	22.83	1
100	0	22.90	22.83	22.76	1		
40M	DFT-S 16QAM	1	1	22.38	22.36	22.29	1
40M	DFT-S 64QAM	1	1	20.44	20.49	20.47	2.5
40M	DFT-S 256QAM	1	1	18.35	18.34	18.31	4.5
40M	CP QPSK	1	1	22.09	22.15	22.05	1.5
BW	MCS Index	Channel		647668	650000	652332	3GPP MPR
		Frequency (MHz)		3715.02	3750	3784.98	
30M	DFT-S PI/2 BPSK	1	1	22.67	22.67	22.44	0
30M	DFT-S QPSK	1	1	22.97	22.96	22.87	0
		1	39	22.86	22.88	22.85	0
		1	76	22.84	22.87	22.77	0
		36	0	22.80	22.82	22.68	1
		36	21	22.92	22.89	22.90	0
		36	42	22.84	22.83	22.78	1
75	0	22.85	22.83	22.74	1		
30M	DFT-S 16QAM	1	1	22.33	22.29	22.31	1
30M	DFT-S 64QAM	1	1	20.49	20.44	20.45	2.5
30M	DFT-S 256QAM	1	1	18.35	18.31	18.28	4.5
30M	CP QPSK	1	1	22.15	22.13	22.10	1.5

NR Conducted Power (Full)

NR Band 78 PC3_SA

BW	MCS Index	Channel		647334	650000	652666	3GPP MPR
		Frequency (MHz)		3710.01	3750	3789.99	
20M	DFT-S PI/2 BPSK	1	1	22.62	22.64	22.44	0
20M	DFT-S QPSK	1	1	22.92	22.96	22.90	0
		1	26	22.94	22.94	22.86	0
		1	49	22.88	22.87	22.81	0
		25	0	22.80	22.78	22.77	1
		25	13	22.94	22.92	22.85	0
		25	26	22.84	22.89	22.85	1
		50	0	22.84	22.90	22.76	1
20M	DFT-S 16QAM	1	1	22.30	22.27	22.24	1
20M	DFT-S 64QAM	1	1	20.47	20.47	20.45	2.5
20M	DFT-S 256QAM	1	1	18.38	18.37	18.26	4.5
20M	CP QPSK	1	1	22.08	22.10	22.03	1.5

NR Conducted Power (Full)							
NR Band 78 PC3_SA							
BW	MCS Index	Channel		647168	650000	652832	3GPP MPR
		Frequency (MHz)		3707.52	3750	3792.48	
15M	DFT-S PI/2 BPSK	1	1	22.64	22.67	22.43	0
15M	DFT-S QPSK	1	1	22.97	22.93	22.88	0
		1	19	22.89	22.92	22.86	0
		1	36	22.84	22.90	22.85	0
		18	0	22.85	22.77	22.72	1
		18	10	22.97	22.94	22.82	0
		18	20	22.88	22.81	22.85	1
36	0	22.89	22.90	22.83	1		
15M	DFT-S 16QAM	1	1	22.35	22.33	22.31	1
15M	DFT-S 64QAM	1	1	20.50	20.41	20.40	2.5
15M	DFT-S 256QAM	1	1	18.32	18.37	18.29	4.5
15M	CP QPSK	1	1	22.17	22.13	22.02	1.5
BW	MCS Index	Channel		647000	650000	653000	3GPP MPR
		Frequency (MHz)		3705	3750	3795	
10M	DFT-S PI/2 BPSK	1	1	22.67	22.63	22.45	0
10M	DFT-S QPSK	1	1	22.96	22.97	22.89	0
		1	11	22.94	22.95	22.82	0
		1	22	22.94	22.91	22.86	0
		12	0	22.85	22.76	22.75	1
		12	6	22.97	22.96	22.84	0
		12	12	22.85	22.83	22.81	1
24	0	22.85	22.87	22.84	1		
10M	DFT-S 16QAM	1	1	22.38	22.37	22.29	1
10M	DFT-S 64QAM	1	1	20.48	20.45	20.44	2.5
10M	DFT-S 256QAM	1	1	18.35	18.30	18.33	4.5
10M	CP QPSK	1	1	22.08	22.11	22.11	1.5

NR Conducted Power (Full)

NR Band 2_NSA

BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		372000	376000	380000	
		Frequency (MHz)		1860	1880	1900	
20M	DFT-S PI/2 BPSK	1	1	23.08	23.19	22.81	0
20M	DFT-S QPSK	1	1	23.13	23.21	22.87	0
		1	53	23.18	23.10	23.06	0
		1	104	23.19	23.15	23.14	0
		50	0	22.05	22.12	22.03	1
		50	28	22.83	22.91	22.79	0
		50	56	22.15	22.08	22.07	1
		100	0	22.11	22.17	22.04	1
20M	DFT-S 16QAM	1	1	22.03	21.95	21.90	1
20M	DFT-S 64QAM	1	1	20.65	20.58	20.49	2.5
20M	DFT-S 256QAM	1	1	18.37	18.33	18.34	4.5
20M	CP QPSK	1	1	21.40	21.42	21.31	1.5

NR Conducted Power (Full)

NR Band 5_NSA

BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		166800	167300	167800	
		Frequency (MHz)		834	836.5	839	
20M	DFT-S PI/2 BPSK	1	1	23.38	23.58	23.43	0
20M	DFT-S QPSK	1	1	23.43	23.65	23.48	0
		1	53	23.40	23.55	23.45	0
		1	104	23.32	23.47	23.37	0
		50	0	22.50	22.65	22.55	1
		50	28	23.49	23.64	23.54	0
		50	56	22.40	22.55	22.45	1
		100	0	22.48	22.61	22.51	1
20M	DFT-S 16QAM	1	1	22.41	22.56	22.46	1
20M	DFT-S 64QAM	1	1	20.86	21.01	20.91	2.5
20M	DFT-S 256QAM	1	1	18.97	19.12	19.02	4.5
20M	CP QPSK	1	1	21.92	22.08	21.99	1.5

NR Conducted Power (Full)

NR Band 7_NSA

BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		502000	507000	512000	
		Frequency (MHz)		2510	2535	2560	
20M	DFT-S PI/2 BPSK	1	1	22.42	22.72	22.54	0
20M	DFT-S QPSK	1	1	22.63	22.80	22.66	0
		1	53	22.57	22.75	22.64	0
		1	104	22.41	22.63	22.50	0
		50	0	21.57	21.72	21.56	1
		50	28	22.56	22.79	22.67	0
		50	56	21.52	21.78	21.57	1
		100	0	21.59	21.78	21.57	1
20M	DFT-S 16QAM	1	1	21.66	21.97	21.73	1
20M	DFT-S 64QAM	1	1	19.90	20.01	19.86	2.5
20M	DFT-S 256QAM	1	1	18.05	18.13	18.07	4.5
20M	CP QPSK	1	1	21.16	21.12	21.09	1.5

NR Conducted Power (Full)

NR Band 25_NSA

BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		372000	376500	381000	
		Frequency (MHz)		1860	1882.5	1905	
20M	DFT-S PI/2 BPSK	1	1	22.90	22.88	22.69	0
20M	DFT-S QPSK	1	1	22.99	23.00	22.70	0
		1	53	22.95	22.86	22.86	0
		1	104	22.91	22.89	22.91	0
		50	0	21.91	21.97	21.96	1
		50	28	22.57	22.53	22.32	0
		50	56	21.96	21.80	21.81	1
		100	0	21.91	21.95	21.86	1
20M	DFT-S 16QAM	1	1	21.75	21.73	21.90	1
20M	DFT-S 64QAM	1	1	20.44	20.40	20.40	2.5
20M	DFT-S 256QAM	1	1	18.49	18.40	18.41	4.5
20M	CP QPSK	1	1	21.79	21.73	21.77	1.5

NR Conducted Power (Full)

NR Band 30_NSA

BW	MCS Index	RB Size	RB Offset		Mid		3GPP MPR (dB)
		Channel			462000		
		Frequency (MHz)			2310		
10M	DFT-S PI/2 BPSK	1	1		22.78		0
10M	DFT-S QPSK	1	1		23		0
		1	26		22.86		0
		1	50		22.94		0
		25	0		21.92		1
		25	14		22.91		0
		25	27		21.93		1
		50	0		21.96		1
10M	DFT-S 16QAM	1	1		21.88		1
10M	DFT-S 64QAM	1	1		20.19		2.5
10M	DFT-S 256QAM	1	1		18.36		4.5
10M	CP QPSK	1	1		21.17		1.5

NR Conducted Power (Full)

NR Band 66_NSA

BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		346000	349000	352000	
		Frequency (MHz)		1730	1745	1760	
40M	DFT-S PI/2 BPSK	1	1	22.35	22.45	22.30	0
40M	DFT-S QPSK	1	1	22.47	22.50	22.34	0
		1	108	22.30	22.39	22.17	0
		1	214	22.23	22.34	22.15	0
		108	0	21.20	21.15	21.24	1
		108	54	22.24	22.41	22.30	0
		108	108	21.29	21.36	21.24	1
		216	0	21.26	21.33	21.30	1
40M	DFT-S 16QAM	1	1	21.61	21.61	21.56	1
40M	DFT-S 64QAM	1	1	20.06	20.11	20.10	2.5
40M	DFT-S 256QAM	1	1	18.14	18.15	18.23	4.5
40M	CP QPSK	1	1	21.24	21.18	21.26	1.5

NR Conducted Power (Full)

NR Band 71_NSA

BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		134600	136100	137600	
		Frequency (MHz)		673	680.5	688	
20M	DFT-S PI/2 BPSK	1	1	23.56	23.63	23.55	0
20M	DFT-S QPSK	1	1	23.79	23.81	23.80	0
		1	53	23.62	23.64	23.63	0
		1	104	23.70	23.72	23.71	0
		50	0	22.76	22.78	22.77	1
		50	28	23.68	23.70	23.69	0
		50	56	22.63	22.65	22.64	1
		100	0	22.72	22.74	22.73	1
20M	DFT-S 16QAM	1	1	22.58	22.60	22.59	1
20M	DFT-S 64QAM	1	1	21.11	21.13	21.12	2.5
20M	DFT-S 256QAM	1	1	19.14	19.06	19.05	4.5
20M	CP QPSK	1	1	22.09	22.21	22.10	1.5

NR Conducted Power (Full)							
NR Band 38_NSA							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		516000	519000	522000	
		Frequency (MHz)		2580	2595	2610	
20M	DFT-S PI/2 BPSK	1	1	22.23	22.47	22.29	0
20M	DFT-S QPSK	1	1	22.21	22.57	22.25	0
		1	26	22.29	22.39	22.29	0
		1	49	22.21	22.37	22.14	0
		25	0	21.15	21.32	21.18	1
		25	13	22.23	22.34	22.33	0
		25	26	21.16	21.06	21.16	1
		50	0	21.18	21.36	21.00	1
20M	DFT-S 16QAM	1	1	20.67	20.87	20.68	1
20M	DFT-S 64QAM	1	1	19.63	19.59	19.51	2.5
20M	DFT-S 256QAM	1	1	17.32	17.47	17.32	4.5
20M	CP QPSK	1	1	21.94	22.14	21.89	1.5

NR Conducted Power (Full)							
NR Band 40_NSA							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		468000	470000	472000	
		Frequency (MHz)		2340	2350	2360	
80M	DFT-S PI/2 BPSK	1	1	22.43	22.58	22.74	0
80M	DFT-S QPSK	1	1	22.61	22.75	22.92	0
		1	109	22.41	22.55	22.72	0
		1	215	22.11	22.25	22.42	0
		108	0	22.11	22.25	22.42	1
		108	55	22.49	22.63	22.80	0
		108	109	22.15	22.29	22.46	1
		216	0	22.11	22.25	22.42	1
80M	DFT-S 16QAM	1	1	22.08	22.22	22.39	1
80M	DFT-S 64QAM	1	1	20.05	20.19	20.36	2.5
80M	DFT-S 256QAM	1	1	18.12	18.26	18.43	4.5
80M	CP QPSK	1	1	21.07	21.21	21.38	1.5

NR Conducted Power (Full)									
NR Band 41 PC2_NSA									
BW	MCS Index	RB Size	RB Offset	Low	Mid-1	Mid-2	Mid-3	High	3GPP MPR (dB)
		Channel		509202	513900	518598	523302	528000	
		Frequency (MHz)		2546.01	2569.5	2592.99	2616.51	2640	
100M	DFT-S PI/2 BPSK	1	1	26.63	26.64	26.58	26.52	26.90	0
100M	DFT-S QPSK	1	1	26.68	26.72	26.65	26.56	26.92	0
		1	137	26.62	26.63	26.55	26.50	26.84	0
		1	271	26.59	26.62	26.60	26.43	26.80	0
		135	0	25.70	25.74	25.64	25.57	25.90	1
		135	69	26.62	26.72	26.65	26.53	26.85	0
		135	138	25.68	25.74	25.63	25.54	25.85	1
		270	0	25.66	25.72	25.62	25.50	25.80	1
100M	DFT-S 16QAM	1	1	25.64	25.67	25.54	25.43	25.76	1
100M	DFT-S 64QAM	1	1	24.16	24.20	24.10	24.01	24.30	2.5
100M	DFT-S 256QAM	1	1	22.21	22.27	22.12	22.06	22.37	4.5
100M	CP QPSK	1	1	25.17	25.22	25.16	25.10	25.32	1.5

NR Conducted Power (Full)									
NR Band 41 PC3_NSA									
BW	MCS Index	RB Size	RB Offset	Low	Mid-1	Mid-2	Mid-3	High	3GPP MPR (dB)
		Channel		509202	513900	518598	523302	528000	
		Frequency (MHz)		2546.01	2569.5	2592.99	2616.51	2640	
100M	DFT-S PI/2 BPSK	1	1	23.59	23.49	23.45	23.51	23.66	0
100M	DFT-S QPSK	1	1	23.71	23.62	23.58	23.55	23.80	0
		1	137	23.61	23.52	23.48	23.45	23.70	0
		1	271	23.58	23.49	23.45	23.42	23.67	0
		135	0	22.64	22.55	22.51	22.48	22.73	1
		135	69	23.54	23.45	23.41	23.38	23.63	0
		135	138	22.51	22.42	22.38	22.35	22.60	1
		270	0	22.74	22.65	22.61	22.58	22.83	1
100M	DFT-S 16QAM	1	1	22.63	22.54	22.50	22.47	22.72	1
100M	DFT-S 64QAM	1	1	21.24	21.15	21.11	21.08	21.33	2.5
100M	DFT-S 256QAM	1	1	19.32	19.23	19.19	19.16	19.41	4.5
100M	CP QPSK	1	1	22.28	22.19	22.15	22.12	22.37	1.5

NR Conducted Power (Full)									
NR Band 77 PC2_NSA									
BW	MCS Index	RB Size	RB Offset	Low	Mid-1	Mid-2	Mid-3	High	3GPP MPR (dB)
		Channel		650000	653000	656000	659000	662000	
		Frequency (MHz)		3750	3795	3840	3885	3930	
100M	DFT-S PI/2 BPSK	1	1	26.42	26.50	26.60	26.75	26.34	0
100M	DFT-S QPSK	1	1	26.61	26.65	26.70	26.80	26.57	0
		1	137	26.54	26.57	26.60	26.71	26.52	0
		1	271	26.49	26.51	26.56	26.65	26.47	0
		135	0	25.70	25.74	25.79	25.89	25.66	1
		135	69	26.44	26.47	26.49	26.52	26.41	0
		135	138	25.60	25.64	25.69	25.81	25.52	1
		270	0	25.52	25.61	25.67	25.72	25.48	1
100M	DFT-S 16QAM	1	1	25.58	25.51	25.60	25.62	25.57	1
100M	DFT-S 64QAM	1	1	24.20	24.25	24.27	24.30	24.24	2.5
100M	DFT-S 256QAM	1	1	22.17	22.22	22.20	22.32	22.25	4.5
100M	CP QPSK	1	1	25.12	25.23	25.17	25.27	25.20	1.5

NR Conducted Power (Full)									
NR Band 77 PC3_NSA									
BW	MCS Index	RB Size	RB Offset	Low	Mid-1	Mid-2	Mid-3	High	3GPP MPR (dB)
		Channel		650000	653000	656000	659000	662000	
		Frequency (MHz)		3750	3795	3840	3885	3930	
100M	DFT-S PI/2 BPSK	1	1	22.92	22.75	23.89	22.96	23.06	0
100M	DFT-S QPSK	1	1	22.97	22.76	23.92	23.03	23.16	0
		1	137	22.89	22.71	23.83	22.92	23.02	0
		1	271	22.85	22.65	23.29	22.88	23.01	0
		135	0	22.05	21.80	22.70	22.02	22.08	1
		135	69	22.73	22.63	23.86	22.76	22.88	0
		135	138	22.00	21.68	22.89	21.98	22.05	1
		270	0	21.96	21.66	22.82	21.86	21.96	1
100M	DFT-S 16QAM	1	1	21.82	21.64	22.68	21.90	21.92	1
100M	DFT-S 64QAM	1	1	20.39	20.35	21.37	20.45	20.49	2.5
100M	DFT-S 256QAM	1	1	18.40	18.36	19.32	18.42	18.46	4.5
100M	CP QPSK	1	1	21.34	21.32	22.26	21.37	21.49	1.5

NR Conducted Power (Full)							
NR Band 78 PC2_NSA							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel			650000		
		Frequency (MHz)			3750		
100M	DFT-S PI/2 BPSK	1	1		26.62		0
100M	DFT-S QPSK	1	1		26.69		0
		1	137		26.67		0
		1	271		26.54		0
		135	0		25.67		1
		135	69		26.66		0
		135	138		25.57		1
		270	0		25.50		1
100M	DFT-S 16QAM	1	1		25.46		1
100M	DFT-S 64QAM	1	1		24.21		2.5
100M	DFT-S 256QAM	1	1		22.18		4.5
100M	CP QPSK	1	1		25.22		1.5

NR Conducted Power (Full)							
NR Band 78 PC3_NSA							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel			650000		
		Frequency (MHz)			3750		
100M	DFT-S PI/2 BPSK	1	1		23.00		0
100M	DFT-S QPSK	1	1		23.08		0
		1	137		23.06		0
		1	271		22.76		0
		135	0		22.09		1
		135	69		23.05		0
		135	138		21.96		1
		270	0		21.89		1
100M	DFT-S 16QAM	1	1		21.82		1
100M	DFT-S 64QAM	1	1		20.60		2.5
100M	DFT-S 256QAM	1	1		18.57		4.5
100M	CP QPSK	1	1		21.66		1.5

WCDMA Conducted Power (Laptop Mode Reduction)

Band	WCDMA II			WCDMA IV			WCDMA V		
TX Channel	9262	9400	9538	1312	1413	1513	4132	4182	4233
Rx Channel	9662	9800	9938	1537	1638	1738	4357	4407	4458
Frequency	1852.4	1880	1907.6	1712.4	1732.6	1752.6	826.4	836.4	846.6
RMC 12.2K	16.88	16.82	16.85	16.89	16.85	16.81	20.46	20.44	20.39
HSDPA Subtest-1	16.12	16.06	16.12	16.21	16.19	16.16	19.75	19.68	19.68
HSDPA Subtest-2	16.06	16.04	16.01	16.19	16.14	16.13	19.76	19.75	19.71
HSDPA Subtest-3	15.37	15.31	15.37	15.75	15.65	15.73	19.25	19.19	19.23
HSDPA Subtest-4	15.32	15.23	15.27	15.62	15.56	15.57	19.23	19.18	19.20
DC-HSDPA Subtest-1	16.08	16.01	16.02	16.16	16.09	16.08	19.68	19.67	19.67
DC-HSDPA Subtest-2	16.02	15.98	15.98	16.10	16.04	16.05	19.63	19.54	19.62
DC-HSDPA Subtest-3	15.32	15.26	15.25	15.61	15.58	15.53	19.16	19.08	19.08
DC-HSDPA Subtest-4	15.27	15.23	15.23	15.56	15.55	15.52	19.15	19.12	19.13
HSUPA Subtest-1	15.05	15.01	15.03	15.18	15.16	15.15	18.56	18.55	18.53
HSUPA Subtest-2	13.98	13.95	13.96	14.19	14.09	14.15	17.87	17.83	17.80
HSUPA Subtest-3	14.83	14.77	14.81	15.22	15.12	15.19	18.75	18.70	18.71
HSUPA Subtest-4	13.52	13.47	13.50	13.73	13.72	13.70	17.37	17.32	17.36
HSUPA Subtest-5	15.08	15.04	15.02	15.23	15.17	15.14	18.71	18.71	18.62

LTE Conducted Power (Laptop Mode Reduction)							
LTE Band 2							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		18700	18900	19100	
		Frequency (MHz)		1860	1880	1900	
20M	QPSK	1	0	15.98	15.96	15.82	0
		1	50	15.94	15.84	15.81	0
		1	99	15.88	15.85	15.80	0
		50	0	14.99	14.96	14.90	1
		50	25	14.96	14.95	14.95	1
		50	50	14.91	14.85	14.90	1
		100	0	14.97	14.88	14.92	1
20M	16QAM	1	0	14.86	14.77	14.82	1
		1	50	14.83	14.77	14.78	1
		1	99	14.81	14.74	14.81	1
		50	0	13.99	13.91	13.95	2
		50	25	13.94	13.94	13.85	2
		50	50	13.91	13.83	13.85	2
		100	0	13.97	13.96	13.89	2
20M	64QAM	1	0	13.99	13.99	13.95	2
		1	50	13.92	13.86	13.82	2
		1	99	13.88	13.79	13.81	2
		50	0	12.99	12.97	12.94	3
		50	25	12.95	12.91	12.94	3
		50	50	12.89	12.85	12.80	3
		100	0	12.92	12.86	12.84	3
20M	256QAM	1	0	10.88	10.88	10.89	5
		1	50	10.80	10.84	10.82	5
		1	99	10.83	10.85	10.77	5
		50	0	10.75	10.79	10.83	5
		50	25	10.81	10.83	10.84	5
		50	50	10.73	10.72	10.74	5
		100	0	10.78	10.77	10.71	5
BW	MCS Index	Channel		18675	18900	19125	3GPP MPR
		Frequency (MHz)		1857.5	1880	1902.5	
15M	QPSK	1	0	15.97	15.91	15.82	0
		1	37	15.89	15.76	15.73	0
		1	74	15.82	15.83	15.71	0
		36	0	14.92	14.86	14.81	1
		36	19	14.95	14.95	14.86	1
		36	39	14.90	14.82	14.82	1
		75	0	14.90	14.79	14.92	1
15M	16QAM	1	0	14.76	14.76	14.82	1
		1	37	14.78	14.68	14.76	1
		1	74	14.78	14.68	14.80	1
		36	0	13.98	13.88	13.88	2
		36	19	13.92	13.90	13.82	2
		36	39	13.84	13.79	13.80	2
		75	0	13.94	13.87	13.79	2
15M	64QAM	1	0	13.92	13.97	13.95	2
		1	37	13.84	13.83	13.80	2
		1	74	13.83	13.79	13.73	2
		36	0	12.96	12.91	12.86	3
		36	19	12.93	12.91	12.92	3
		36	39	12.81	12.82	12.76	3
		75	0	12.82	12.84	12.78	3
15M	256QAM	1	0	10.71	10.82	10.73	5
		1	37	10.77	10.91	10.79	5
		1	74	10.74	10.78	10.88	5
		36	0	10.78	10.77	10.74	5
		36	19	10.64	10.77	10.75	5
		36	39	10.82	10.79	10.76	5
		75	0	10.77	10.75	10.71	5

LTE Conducted Power (Laptop Mode Reduction)									
LTE Band 2									
BW	MCS Index	Channel		18650	18900	19150	3GPP MPR		
		Frequency (MHz)		1855	1880	1905			
10M	QPSK	1	0	15.93	15.87	15.73	0		
		1	24	15.88	15.74	15.76	0		
		1	49	15.86	15.85	15.74	0		
		25	0	14.99	14.94	14.83	1		
		25	12	14.92	14.85	14.91	1		
		25	25	14.85	14.76	14.90	1		
10M	16QAM	50	0	14.95	14.86	14.86	1		
		1	0	14.80	14.73	14.76	1		
		1	24	14.75	14.73	14.68	1		
		1	49	14.79	14.74	14.80	1		
		25	0	13.91	13.91	13.89	2		
		25	12	13.92	13.89	13.75	2		
10M	64QAM	25	25	13.86	13.83	13.78	2		
		50	0	13.87	13.89	13.82	2		
		1	0	13.89	13.96	13.87	2		
		1	24	13.87	13.78	13.82	2		
		1	49	13.78	13.75	13.79	2		
		25	0	12.93	12.93	12.91	3		
10M	256QAM	25	12	12.86	12.83	12.92	3		
		25	25	12.82	12.84	12.72	3		
		50	0	12.83	12.84	12.83	3		
		1	0	10.75	10.74	10.63	5		
		1	24	10.86	10.75	10.82	5		
		1	49	10.77	10.84	10.80	5		
10M	256QAM	25	0	10.75	10.80	10.79	5		
		25	12	10.65	10.73	10.70	5		
		25	25	10.79	10.73	10.88	5		
		50	0	10.64	10.66	10.70	5		
		BW	MCS Index	Channel		18625	18900	19175	3GPP MPR
				Frequency (MHz)		1852.5	1880	1907.5	
5M	QPSK	1	0	15.97	15.94	15.74	0		
		1	12	15.93	15.77	15.78	0		
		1	24	15.86	15.80	15.71	0		
		12	0	14.99	14.96	14.85	1		
		12	6	14.94	14.92	14.86	1		
		12	13	14.81	14.77	14.82	1		
5M	16QAM	25	0	14.96	14.85	14.92	1		
		1	0	14.80	14.76	14.80	1		
		1	12	14.76	14.67	14.69	1		
		1	24	14.80	14.72	14.79	1		
		12	0	13.95	13.83	13.89	2		
		12	6	13.93	13.87	13.76	2		
5M	64QAM	12	13	13.83	13.82	13.84	2		
		25	0	13.94	13.93	13.86	2		
		1	0	13.99	13.98	13.86	2		
		1	12	13.82	13.81	13.77	2		
		1	24	13.81	13.69	13.71	2		
		12	0	12.92	12.89	12.94	3		
5M	256QAM	12	6	12.93	12.86	12.88	3		
		12	13	12.88	12.75	12.73	3		
		25	0	12.84	12.76	12.84	3		
		1	0	10.74	10.68	10.70	5		
		1	12	10.80	10.75	10.75	5		
		1	24	10.80	10.82	10.74	5		
5M	256QAM	12	0	10.76	10.83	10.79	5		
		12	6	10.66	10.77	10.80	5		
		12	13	10.86	10.71	10.86	5		
		25	0	10.73	10.67	10.74	5		

LTE Conducted Power (Laptop Mode Reduction)									
LTE Band 2									
BW	MCS Index	Channel		18615	18900	19185	3GPP MPR		
		Frequency (MHz)		1851.5	1880	1908.5			
3M	QPSK	1	0	15.95	15.87	15.75	0		
		1	7	15.86	15.76	15.80	0		
		1	14	15.88	15.83	15.71	0		
		8	0	14.99	14.96	14.82	1		
		8	3	14.88	14.91	14.87	1		
		8	7	14.81	14.75	14.84	1		
3M	16QAM	15	0	14.91	14.78	14.90	1		
		1	0	14.77	14.69	14.74	1		
		1	7	14.77	14.73	14.73	1		
		1	14	14.71	14.66	14.75	1		
		8	0	13.94	13.91	13.90	2		
		8	3	13.93	13.91	13.85	2		
3M	64QAM	8	7	13.84	13.75	13.84	2		
		15	0	13.93	13.94	13.83	2		
		1	0	13.97	13.98	13.95	2		
		1	7	13.89	13.82	13.75	2		
		1	14	13.88	13.78	13.74	2		
		8	0	12.97	12.97	12.92	3		
3M	256QAM	8	3	12.90	12.83	12.86	3		
		8	7	12.84	12.85	12.75	3		
		15	0	12.82	12.82	12.80	3		
		1	0	10.72	10.81	10.73	5		
		1	7	10.84	10.88	10.79	5		
		1	14	10.83	10.78	10.86	5		
3M	256QAM	8	0	10.76	10.76	10.70	5		
		8	3	10.67	10.73	10.75	5		
		8	7	10.75	10.80	10.77	5		
		15	0	10.73	10.79	10.72	5		
		BW	MCS Index	Channel		18607	18900	19193	3GPP MPR
				Frequency (MHz)		1850.7	1880	1909.3	
1.4M	QPSK	1	0	15.86	15.83	15.76	0		
		1	2	15.71	15.70	15.70	0		
		1	5	15.68	15.62	15.67	0		
		3	0	15.79	15.96	15.82	0		
		3	1	15.85	15.90	15.83	0		
		3	3	15.71	15.77	15.82	0		
1.4M	16QAM	6	0	14.88	14.80	14.74	1		
		1	0	14.77	14.66	14.73	1		
		1	2	14.64	14.74	14.58	1		
		1	5	14.60	14.65	14.62	1		
		3	0	14.94	14.79	14.82	1		
		3	1	14.87	14.78	14.71	1		
1.4M	64QAM	3	3	14.82	14.64	14.72	1		
		6	0	13.86	13.85	13.70	2		
		1	0	13.78	13.77	13.84	2		
		1	2	13.80	13.76	13.70	2		
		1	5	13.80	13.65	13.65	2		
		3	0	13.90	13.92	13.85	2		
1.4M	256QAM	3	1	13.78	13.79	13.79	2		
		3	3	13.72	13.65	13.67	2		
		6	0	12.87	12.69	12.80	3		
		1	0	10.86	10.86	10.92	5		
		1	2	10.80	10.84	10.79	5		
		1	5	10.79	10.78	10.77	5		
1.4M	256QAM	3	0	10.71	10.74	10.78	5		
		3	1	10.83	10.91	10.90	5		
		3	3	10.68	10.73	10.77	5		
		6	0	10.76	10.81	10.71	5		

LTE Conducted Power (Laptop Mode Reduction)									
LTE Band 4									
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)		
		Channel		20050	20175	20300			
		Frequency (MHz)		1720	1732.5	1745			
20M	QPSK	1	0	16.35	16.31	16.27	0		
		1	50	16.32	16.28	16.26	0		
		1	99	16.29	16.19	16.19	0		
		50	0	15.38	15.36	15.34	1		
		50	25	15.36	15.29	15.35	1		
		50	50	15.31	15.21	15.25	1		
20M	16QAM	100	0	15.27	15.17	15.26	1		
		1	0	15.36	15.27	15.27	1		
		1	50	15.21	15.17	15.13	1		
		1	99	15.18	15.09	15.12	1		
		50	0	14.32	14.25	14.29	2		
		50	25	14.26	14.23	14.18	2		
20M	64QAM	50	50	14.21	14.15	14.12	2		
		100	0	14.13	14.13	14.12	2		
		1	0	14.31	14.23	14.31	2		
		1	50	14.26	14.18	14.21	2		
		1	99	14.15	14.05	14.07	2		
		50	0	13.24	13.18	13.23	3		
20M	256QAM	50	25	13.21	13.19	13.16	3		
		50	50	13.18	13.17	13.12	3		
		100	0	13.23	13.15	13.13	3		
		1	0	11.46	11.39	11.41	5		
		1	50	11.36	11.32	11.35	5		
		1	99	11.27	11.30	11.31	5		
20M	256QAM	50	0	11.28	11.26	11.30	5		
		50	25	11.27	11.34	11.37	5		
		50	50	11.24	11.31	11.19	5		
		100	0	11.26	11.30	11.28	5		
		BW	MCS Index	Channel		20025	20175	20325	3GPP MPR
		Frequency (MHz)		1717.5	1732.5	1747.5			
15M	QPSK	1	0	16.34	16.29	16.25	0		
		1	37	16.31	16.22	16.17	0		
		1	74	16.27	16.13	16.15	0		
		36	0	15.33	15.29	15.33	1		
		36	19	15.35	15.25	15.29	1		
		36	39	15.23	15.15	15.18	1		
15M	16QAM	75	0	15.23	15.10	15.18	1		
		1	0	15.35	15.20	15.21	1		
		1	37	15.19	15.14	15.03	1		
		1	74	15.17	15.01	15.06	1		
		36	0	14.32	14.15	14.19	2		
		36	19	14.25	14.20	14.15	2		
15M	64QAM	36	39	14.13	14.06	14.02	2		
		75	0	14.12	14.13	14.03	2		
		1	0	14.26	14.14	14.21	2		
		1	37	14.17	14.18	14.17	2		
		1	74	14.14	13.99	14.05	2		
		36	0	13.18	13.08	13.14	3		
15M	256QAM	36	19	13.20	13.14	13.08	3		
		36	39	13.09	13.11	13.08	3		
		75	0	13.18	13.05	13.10	3		
		1	0	11.23	11.28	11.28	5		
		1	37	11.27	11.35	11.35	5		
		1	74	11.31	11.29	11.29	5		
15M	256QAM	36	0	11.32	11.28	11.20	5		
		36	19	11.11	11.25	11.26	5		
		36	39	11.28	11.32	11.30	5		
		75	0	11.28	11.24	11.20	5		

LTE Conducted Power (Laptop Mode Reduction)									
LTE Band 4									
BW	MCS Index	Channel		20000	20175	20350	3GPP MPR		
		Frequency (MHz)		1715	1732.5	1750			
10M	QPSK	1	0	16.33	16.31	16.25	0		
		1	24	16.29	16.24	16.20	0		
		1	49	16.24	16.12	16.19	0		
		25	0	15.38	15.33	15.25	1		
		25	12	15.32	15.19	15.29	1		
		25	25	15.27	15.12	15.24	1		
10M	16QAM	50	0	15.27	15.17	15.26	1		
		1	0	15.27	15.27	15.20	1		
		1	24	15.14	15.14	15.13	1		
		1	49	15.11	15.02	15.04	1		
		25	0	14.23	14.18	14.21	2		
		25	12	14.17	14.22	14.18	2		
10M	64QAM	25	25	14.19	14.07	14.10	2		
		50	0	14.09	14.13	14.12	2		
		1	0	14.30	14.19	14.31	2		
		1	24	14.20	14.13	14.15	2		
		1	49	14.09	14.01	14.01	2		
		25	0	13.16	13.11	13.20	3		
10M	256QAM	25	12	13.20	13.14	13.09	3		
		25	25	13.09	13.08	13.08	3		
		50	0	13.19	13.09	13.09	3		
		1	0	11.20	11.21	11.15	5		
		1	24	11.28	11.29	11.34	5		
		1	49	11.32	11.31	11.23	5		
10M	256QAM	25	0	11.19	11.33	11.32	5		
		25	12	11.24	11.25	11.27	5		
		25	25	11.32	11.31	11.29	5		
		50	0	11.21	11.23	11.17	5		
		BW	MCS Index	Channel		19975	20175	20375	3GPP MPR
				Frequency (MHz)		1712.5	1732.5	1752.5	
5M	QPSK	1	0	16.27	16.28	16.27	0		
		1	12	16.25	16.21	16.25	0		
		1	24	16.27	16.10	16.11	0		
		12	0	15.35	15.34	15.33	1		
		12	6	15.26	15.29	15.34	1		
		12	13	15.25	15.19	15.22	1		
5M	16QAM	25	0	15.23	15.14	15.21	1		
		1	0	15.26	15.17	15.22	1		
		1	12	15.21	15.08	15.06	1		
		1	24	15.13	15.04	15.05	1		
		12	0	14.29	14.17	14.25	2		
		12	6	14.22	14.23	14.17	2		
5M	64QAM	12	13	14.17	14.08	14.06	2		
		25	0	14.05	14.03	14.03	2		
		1	0	14.27	14.23	14.26	2		
		1	12	14.22	14.09	14.16	2		
		1	24	14.15	14.05	14.00	2		
		12	0	13.18	13.17	13.13	3		
5M	256QAM	12	6	13.12	13.09	13.13	3		
		12	13	13.16	13.15	13.08	3		
		25	0	13.16	13.13	13.13	3		
		1	0	11.42	11.38	11.34	5		
		1	12	11.36	11.29	11.25	5		
		1	24	11.26	11.24	11.31	5		
5M	256QAM	12	0	11.25	11.22	11.27	5		
		12	6	11.18	11.26	11.27	5		
		12	13	11.15	11.30	11.11	5		
		25	0	11.16	11.30	11.27	5		

LTE Conducted Power (Laptop Mode Reduction)									
LTE Band 4									
BW	MCS Index	Channel		19965	20175	20385	3GPP MPR		
		Frequency (MHz)		1711.5	1732.5	1753.5			
3M	QPSK	1	0	16.30	16.30	16.26	0		
		1	7	16.32	16.28	16.17	0		
		1	14	16.25	16.10	16.13	0		
		8	0	15.36	15.36	15.28	1		
		8	3	15.33	15.19	15.31	1		
		8	7	15.21	15.11	15.18	1		
3M	16QAM	15	0	15.22	15.15	15.21	1		
		1	0	15.28	15.22	15.23	1		
		1	7	15.21	15.17	15.03	1		
		1	14	15.17	15.03	15.04	1		
		8	0	14.32	14.20	14.27	2		
		8	3	14.20	14.22	14.15	2		
3M	64QAM	8	7	14.18	14.10	14.10	2		
		15	0	14.11	14.13	14.03	2		
		1	0	14.23	14.20	14.22	2		
		1	7	14.21	14.17	14.19	2		
		1	14	14.08	13.97	13.99	2		
		8	0	13.20	13.18	13.16	3		
3M	256QAM	8	3	13.18	13.14	13.13	3		
		8	7	13.14	13.16	13.02	3		
		15	0	13.17	13.11	13.12	3		
		1	0	11.45	11.35	11.35	5		
		1	7	11.29	11.26	11.30	5		
		1	14	11.26	11.20	11.31	5		
3M	256QAM	8	0	11.19	11.24	11.20	5		
		8	3	11.22	11.28	11.31	5		
		8	7	11.20	11.21	11.09	5		
		15	0	11.20	11.26	11.23	5		
		BW	MCS Index	Channel		19957	20175	20393	3GPP MPR
				Frequency (MHz)		1710.7	1732.5	1754.3	
1.4M	QPSK	1	0	16.30	16.18	16.10	0		
		1	2	16.26	16.15	16.08	0		
		1	5	16.12	16.02	16.06	0		
		3	0	16.25	16.27	16.21	0		
		3	1	16.11	16.06	16.17	0		
		3	3	16.24	16.01	16.19	0		
1.4M	16QAM	6	0	15.22	14.98	15.07	1		
		1	0	15.30	15.06	15.21	1		
		1	2	15.05	15.08	14.95	1		
		1	5	15.09	14.93	14.89	1		
		3	0	15.20	15.06	15.13	1		
		3	1	15.25	15.16	15.00	1		
1.4M	64QAM	3	3	15.19	14.98	14.99	1		
		6	0	14.07	13.91	13.95	2		
		1	0	14.10	14.16	14.17	2		
		1	2	14.18	14.01	13.99	2		
		1	5	13.99	14.00	13.85	2		
		3	0	14.19	14.08	14.06	2		
1.4M	256QAM	3	1	14.14	13.98	14.06	2		
		3	3	14.07	13.98	13.98	2		
		6	0	13.11	13.11	12.99	3		
		1	0	11.39	11.39	11.35	5		
		1	2	11.29	11.23	11.33	5		
		1	5	11.27	11.29	11.28	5		
1.4M	256QAM	3	0	11.19	11.19	11.24	5		
		3	1	11.27	11.27	11.27	5		
		3	3	11.23	11.22	11.09	5		
		6	0	11.16	11.21	11.27	5		

LTE Conducted Power (Laptop Mode Reduction)									
LTE Band 5									
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)		
		Channel		20450	20525	20600			
		Frequency (MHz)		829	836.5	844			
10M	QPSK	1	0	19.21	19.08	19.02	0		
		1	24	19.14	19.06	19.01	0		
		1	49	19.07	19.03	19.00	0		
		25	0	18.14	18.08	18.11	1		
		25	12	18.11	18.01	18.05	1		
		25	25	18.07	18.02	18.03	1		
10M	16QAM	50	0	18.12	18.04	18.01	1		
		1	0	18.11	18.03	18.09	1		
		1	24	18.07	18.01	17.99	1		
		1	49	18.03	17.94	18.00	1		
		25	0	17.19	17.11	17.16	2		
		25	12	17.11	17.03	17.01	2		
10M	64QAM	25	25	17.06	17.00	17.06	2		
		50	0	17.12	17.12	17.02	2		
		1	0	17.13	17.10	17.11	2		
		1	24	17.08	17.02	17.04	2		
		1	49	17.01	16.94	16.92	2		
		25	0	16.14	16.05	16.13	3		
10M	256QAM	25	12	16.09	16.08	16.03	3		
		25	25	16.01	15.97	15.94	3		
		50	0	16.12	16.06	16.03	3		
		1	0	14.42	14.44	14.35	5		
		1	24	14.31	14.35	14.38	5		
		1	49	14.33	14.36	14.35	5		
10M	256QAM	25	0	14.26	14.31	14.31	5		
		25	12	14.33	14.40	14.30	5		
		25	25	14.24	14.32	14.28	5		
		50	0	14.27	14.24	14.21	5		
		BW	MCS Index	Channel		20425	20525	20625	3GPP MPR
				Frequency (MHz)		826.5	836.5	846.5	
5M	QPSK	1	0	19.14	19.07	19.02	0		
		1	12	19.14	18.96	18.99	0		
		1	24	19.06	18.98	18.95	0		
		12	0	18.11	18.08	18.01	1		
		12	6	18.10	17.96	18.04	1		
		12	13	17.99	17.99	17.96	1		
5M	16QAM	25	0	18.04	17.97	18.12	1		
		1	0	18.05	18.00	18.09	1		
		1	12	18.00	18.00	17.99	1		
		1	24	17.94	17.85	17.99	1		
		12	0	17.10	17.02	17.08	2		
		12	6	17.04	17.01	16.96	2		
5M	64QAM	12	13	16.98	16.98	17.00	2		
		25	0	17.05	17.10	16.96	2		
		1	0	17.04	17.07	17.03	2		
		1	12	16.99	17.02	17.03	2		
		1	24	16.96	16.93	16.90	2		
		12	0	16.13	16.05	16.06	3		
5M	256QAM	12	6	16.09	16.07	16.01	3		
		12	13	16.01	15.89	15.85	3		
		25	0	16.12	15.97	15.96	3		
		1	0	14.15	14.28	14.22	5		
		1	12	14.35	14.37	14.34	5		
		1	24	14.27	14.24	14.31	5		
5M	256QAM	12	0	14.33	14.22	14.23	5		
		12	6	14.13	14.27	14.28	5		
		12	13	14.24	14.30	14.31	5		
		25	0	14.26	14.24	14.21	5		

LTE Conducted Power (Laptop Mode Reduction)									
LTE Band 5									
BW	MCS Index	Channel		20415	20525	20635	3GPP MPR		
		Frequency (MHz)		825.5	836.5	847.5			
3M	QPSK	1	0	19.16	19.07	19.00	0		
		1	7	19.05	19.01	18.91	0		
		1	14	19.02	18.96	18.94	0		
		8	0	18.12	18.04	18.11	1		
		8	3	18.07	17.94	18.05	1		
		8	7	18.00	17.98	17.99	1		
3M	16QAM	15	0	18.02	18.00	18.05	1		
		1	0	18.08	18.02	18.08	1		
		1	7	18.03	18.01	17.98	1		
		1	14	17.98	17.84	17.98	1		
		8	0	17.14	17.01	17.13	2		
		8	3	17.07	17.02	16.98	2		
3M	64QAM	8	7	17.01	16.95	16.96	2		
		15	0	17.07	17.05	16.92	2		
		1	0	17.04	17.07	17.08	2		
		1	7	17.04	16.95	16.99	2		
		1	14	16.91	16.92	16.92	2		
		8	0	16.04	15.96	16.06	3		
3M	256QAM	8	3	16.04	16.03	15.93	3		
		8	7	15.98	15.97	15.89	3		
		15	0	16.05	16.01	15.94	3		
		1	0	14.19	14.18	14.16	5		
		1	7	14.36	14.27	14.29	5		
		1	14	14.25	14.35	14.33	5		
3M	256QAM	8	0	14.29	14.29	14.35	5		
		8	3	14.18	14.27	14.20	5		
		8	7	14.26	14.27	14.33	5		
		15	0	14.14	14.14	14.19	5		
		BW	MCS Index	Channel		20407	20525	20643	3GPP MPR
				Frequency (MHz)		824.7	836.5	848.3	
1.4M	QPSK	1	0	19.12	19.02	18.82	0		
		1	2	19.04	18.88	18.86	0		
		1	5	19.03	18.85	18.90	0		
		3	0	18.98	18.91	19.02	0		
		3	1	18.96	18.94	19.05	0		
		3	3	18.95	18.90	18.99	0		
1.4M	16QAM	6	0	18.05	17.93	18.05	1		
		1	0	17.92	17.90	17.96	1		
		1	2	18.01	17.93	17.87	1		
		1	5	17.88	17.88	17.89	1		
		3	0	18.12	17.99	18.02	1		
		3	1	17.99	17.89	17.93	1		
1.4M	64QAM	3	3	17.95	17.84	17.87	1		
		6	0	16.96	16.94	16.93	2		
		1	0	16.99	17.06	16.99	2		
		1	2	16.91	16.92	16.98	2		
		1	5	16.88	16.84	16.81	2		
		3	0	16.94	16.92	16.98	2		
1.4M	256QAM	3	1	16.93	17.02	16.90	2		
		3	3	16.84	16.85	16.74	2		
		6	0	15.89	15.91	15.81	3		
		1	0	14.41	14.43	14.28	5		
		1	2	14.23	14.32	14.33	5		
		1	5	14.23	14.34	14.29	5		
1.4M	256QAM	3	0	14.17	14.25	14.31	5		
		3	1	14.33	14.40	14.24	5		
		3	3	14.24	14.30	14.22	5		
		6	0	14.20	14.23	14.12	5		

LTE Conducted Power (Laptop Mode Reduction)									
LTE Band 7									
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)		
		Channel		20850	21100	21350			
		Frequency (MHz)		2510	2535	2560			
20M	QPSK	1	0	17.34	17.43	17.38	0		
		1	50	17.33	17.41	17.37	0		
		1	99	17.32	17.38	17.34	0		
		50	0	16.28	16.38	16.32	1		
		50	25	16.30	16.34	16.25	1		
		50	50	16.24	16.31	16.22	1		
20M	16QAM	100	0	16.30	16.36	16.27	1		
		1	0	16.40	16.44	16.43	1		
		1	50	16.35	16.39	16.31	1		
		1	99	16.28	16.31	16.23	1		
		50	0	15.42	15.43	15.36	2		
		50	25	15.30	15.38	15.33	2		
20M	64QAM	50	50	15.28	15.31	15.23	2		
		100	0	15.30	15.34	15.32	2		
		1	0	15.32	15.38	15.33	2		
		1	50	15.25	15.32	15.25	2		
		1	99	15.20	15.26	15.19	2		
		50	0	14.32	14.37	14.30	3		
20M	256QAM	50	25	14.25	14.32	14.24	3		
		50	50	14.22	14.27	14.26	3		
		100	0	14.27	14.31	14.24	3		
		1	0	12.42	12.37	12.37	5		
		1	50	12.37	12.38	12.30	5		
		1	99	12.29	12.31	12.35	5		
20M	256QAM	50	0	12.21	12.28	12.31	5		
		50	25	12.36	12.33	12.35	5		
		50	50	12.28	12.24	12.20	5		
		100	0	12.28	12.33	12.25	5		
		BW	MCS Index	Channel		20825	21100	21375	3GPP MPR
		Frequency (MHz)		2507.5	2535	2562.5			
15M	QPSK	1	0	17.32	17.36	17.33	0		
		1	37	17.30	17.32	17.34	0		
		1	74	17.30	17.33	17.30	0		
		36	0	16.28	16.37	16.32	1		
		36	19	16.21	16.30	16.17	1		
		36	39	16.23	16.23	16.21	1		
15M	16QAM	75	0	16.20	16.26	16.17	1		
		1	0	16.38	16.37	16.41	1		
		1	37	16.26	16.37	16.26	1		
		1	74	16.25	16.25	16.23	1		
		36	0	15.38	15.39	15.28	2		
		36	19	15.20	15.38	15.29	2		
15M	64QAM	36	39	15.25	15.24	15.20	2		
		75	0	15.21	15.32	15.28	2		
		1	0	15.27	15.31	15.24	2		
		1	37	15.19	15.24	15.20	2		
		1	74	15.13	15.22	15.10	2		
		36	0	14.23	14.28	14.23	3		
15M	256QAM	36	19	14.17	14.22	14.22	3		
		36	39	14.16	14.22	14.16	3		
		75	0	14.25	14.31	14.14	3		
		1	0	12.23	12.28	12.22	5		
		1	37	12.33	12.31	12.36	5		
		1	74	12.27	12.23	12.29	5		
15M	256QAM	36	0	12.27	12.23	12.24	5		
		36	19	12.14	12.20	12.20	5		
		36	39	12.27	12.28	12.27	5		
		75	0	12.24	12.29	12.22	5		

LTE Conducted Power (Laptop Mode Reduction)									
LTE Band 7									
BW	MCS Index	Channel		20800	21100	21400	3GPP MPR		
		Frequency (MHz)		2505	2535	2565			
10M	QPSK	1	0	17.24	17.37	17.30	0		
		1	24	17.31	17.41	17.34	0		
		1	49	17.25	17.37	17.26	0		
		25	0	16.28	16.37	16.31	1		
		25	12	16.20	16.29	16.24	1		
		25	25	16.15	16.25	16.13	1		
10M	16QAM	50	0	16.25	16.35	16.27	1		
		1	0	16.35	16.35	16.39	1		
		1	24	16.30	16.37	16.28	1		
		1	49	16.20	16.22	16.23	1		
		25	0	15.36	15.36	15.33	2		
		25	12	15.30	15.30	15.27	2		
10M	64QAM	25	25	15.23	15.30	15.18	2		
		50	0	15.28	15.24	15.30	2		
		1	0	15.23	15.30	15.27	2		
		1	24	15.17	15.32	15.18	2		
		1	49	15.18	15.16	15.15	2		
		25	0	14.29	14.34	14.30	3		
10M	256QAM	25	12	14.18	14.28	14.19	3		
		25	25	14.13	14.25	14.26	3		
		50	0	14.17	14.25	14.24	3		
		1	0	12.18	12.23	12.21	5		
		1	24	12.27	12.28	12.32	5		
		1	49	12.32	12.27	12.26	5		
10M	256QAM	25	0	12.26	12.23	12.34	5		
		25	12	12.23	12.21	12.20	5		
		25	25	12.27	12.31	12.34	5		
		50	0	12.13	12.22	12.25	5		
		BW	MCS Index	Channel		20775	21100	21425	3GPP MPR
				Frequency (MHz)		2502.5	2535	2567.5	
5M	QPSK	1	0	17.33	17.35	17.36	0		
		1	12	17.28	17.39	17.37	0		
		1	24	17.23	17.28	17.26	0		
		12	0	16.25	16.28	16.31	1		
		12	6	16.21	16.27	16.16	1		
		12	13	16.21	16.29	16.21	1		
5M	16QAM	25	0	16.29	16.27	16.25	1		
		1	0	16.35	16.39	16.41	1		
		1	12	16.34	16.37	16.28	1		
		1	24	16.18	16.27	16.20	1		
		12	0	15.37	15.33	15.35	2		
		12	6	15.23	15.36	15.31	2		
5M	64QAM	12	13	15.20	15.29	15.22	2		
		25	0	15.29	15.34	15.24	2		
		1	0	15.29	15.28	15.26	2		
		1	12	15.18	15.24	15.25	2		
		1	24	15.12	15.16	15.18	2		
		12	0	14.27	14.27	14.22	3		
5M	256QAM	12	6	14.20	14.26	14.24	3		
		12	13	14.20	14.24	14.23	3		
		25	0	14.27	14.24	14.14	3		
		1	0	12.38	12.31	12.30	5		
		1	12	12.34	12.29	12.27	5		
		1	24	12.27	12.22	12.31	5		
5M	256QAM	12	0	12.13	12.19	12.31	5		
		12	6	12.27	12.24	12.27	5		
		12	13	12.18	12.18	12.10	5		
		25	0	12.21	12.33	12.17	5		

LTE Conducted Power (Laptop Mode Reduction)									
LTE Band 12									
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)		
		Channel		23060	23095	23130			
		Frequency (MHz)		704	707.5	711			
10M	QPSK	1	0	20.43	20.46	20.44	0		
		1	24	20.40	20.42	20.38	0		
		1	49	20.29	20.38	20.28	0		
		25	0	19.45	19.49	19.46	1		
		25	12	19.43	19.43	19.35	1		
		25	25	19.01	19.01	18.96	1		
10M	16QAM	50	0	19.35	19.43	19.34	1		
		1	0	19.37	19.41	19.31	1		
		1	24	19.29	19.32	19.23	1		
		1	49	19.27	19.31	19.21	1		
		25	0	18.43	18.47	18.38	2		
		25	12	18.37	18.44	18.34	2		
10M	64QAM	25	25	18.39	18.43	18.39	2		
		50	0	18.34	18.44	18.37	2		
		1	0	18.37	18.43	18.42	2		
		1	24	18.27	18.37	18.31	2		
		1	49	18.16	18.26	18.24	2		
		25	0	17.37	17.46	17.37	3		
10M	256QAM	25	12	17.35	17.44	17.44	3		
		25	25	17.39	17.43	17.42	3		
		50	0	17.33	17.40	17.35	3		
		1	0	15.40	15.41	15.34	5		
		1	24	15.33	15.34	15.35	5		
		1	49	15.31	15.38	15.28	5		
10M	256QAM	25	0	15.25	15.32	15.32	5		
		25	12	15.27	15.34	15.36	5		
		25	25	15.19	15.23	15.26	5		
		50	0	15.30	15.32	15.25	5		
		BW	MCS Index	Channel		23035	23095	23155	3GPP MPR
				Frequency (MHz)		701.5	707.5	713.5	
5M	QPSK	1	0	20.33	20.42	20.34	0		
		1	12	20.31	20.32	20.36	0		
		1	24	20.19	20.36	20.25	0		
		12	0	19.40	19.48	19.36	1		
		12	6	19.41	19.42	19.31	1		
		12	13	18.99	18.91	18.88	1		
5M	16QAM	25	0	19.34	19.42	19.34	1		
		1	0	19.35	19.32	19.30	1		
		1	12	19.24	19.23	19.23	1		
		1	24	19.20	19.31	19.11	1		
		12	0	18.35	18.40	18.35	2		
		12	6	18.28	18.35	18.33	2		
5M	64QAM	12	13	18.33	18.41	18.33	2		
		25	0	18.34	18.43	18.36	2		
		1	0	18.31	18.39	18.33	2		
		1	12	18.22	18.30	18.21	2		
		1	24	18.14	18.16	18.17	2		
		12	0	17.37	17.39	17.33	3		
5M	256QAM	12	6	17.27	17.44	17.34	3		
		12	13	17.33	17.35	17.37	3		
		25	0	17.33	17.34	17.25	3		
		1	0	15.17	15.24	15.19	5		
		1	12	15.27	15.36	15.36	5		
		1	24	15.24	15.30	15.38	5		
5M	256QAM	12	0	15.33	15.20	15.28	5		
		12	6	15.16	15.25	15.22	5		
		12	13	15.26	15.33	15.29	5		
		25	0	15.28	15.24	15.15	5		

LTE Conducted Power (Laptop Mode Reduction)									
LTE Band 12									
BW	MCS Index	Channel		23025	23095	23165	3GPP MPR		
		Frequency (MHz)		700.5	707.5	714.5			
3M	QPSK	1	0	20.36	20.44	20.39	0		
		1	7	20.32	20.35	20.32	0		
		1	14	20.29	20.37	20.25	0		
		8	0	19.36	19.49	19.38	1		
		8	3	19.40	19.36	19.32	1		
		8	7	19.01	18.97	18.90	1		
3M	16QAM	15	0	19.33	19.42	19.27	1		
		1	0	19.34	19.33	19.30	1		
		1	7	19.19	19.28	19.21	1		
		1	14	19.21	19.22	19.18	1		
		8	0	18.35	18.39	18.31	2		
		8	3	18.29	18.43	18.34	2		
3M	64QAM	8	7	18.37	18.35	18.36	2		
		15	0	18.33	18.40	18.33	2		
		1	0	18.30	18.42	18.38	2		
		1	7	18.20	18.31	18.26	2		
		1	14	18.11	18.17	18.15	2		
		8	0	17.31	17.44	17.35	3		
3M	256QAM	8	3	17.35	17.40	17.41	3		
		8	7	17.31	17.36	17.35	3		
		15	0	17.30	17.35	17.33	3		
		1	0	15.26	15.21	15.17	5		
		1	7	15.30	15.35	15.32	5		
		1	14	15.26	15.30	15.29	5		
3M	256QAM	8	0	15.24	15.30	15.36	5		
		8	3	15.23	15.27	15.26	5		
		8	7	15.29	15.24	15.30	5		
		15	0	15.22	15.16	15.20	5		
		BW	MCS Index	Channel		23017	23095	23173	3GPP MPR
				Frequency (MHz)		699.7	707.5	715.3	
1.4M	QPSK	1	0	20.30	20.39	20.36	0		
		1	2	20.31	20.20	20.24	0		
		1	5	20.12	20.33	20.13	0		
		3	0	20.42	20.42	20.32	0		
		3	1	20.37	20.29	20.18	0		
		3	3	19.89	19.85	19.88	0		
1.4M	16QAM	6	0	19.20	19.33	19.22	1		
		1	0	19.29	19.36	19.10	1		
		1	2	19.13	19.19	19.10	1		
		1	5	19.13	19.13	19.06	1		
		3	0	19.38	19.34	19.18	1		
		3	1	19.18	19.29	19.29	1		
1.4M	64QAM	3	3	19.25	19.42	19.34	1		
		6	0	18.33	18.34	18.25	2		
		1	0	18.29	18.26	18.36	2		
		1	2	18.16	18.20	18.19	2		
		1	5	18.05	18.12	18.21	2		
		3	0	18.27	18.39	18.30	2		
1.4M	256QAM	3	1	18.29	18.34	18.35	2		
		3	3	18.22	18.33	18.22	2		
		6	0	17.15	17.26	17.20	3		
		1	0	15.31	15.38	15.34	5		
		1	2	15.29	15.24	15.29	5		
		1	5	15.24	15.31	15.18	5		
1.4M	256QAM	3	0	15.25	15.23	15.30	5		
		3	1	15.27	15.29	15.32	5		
		3	3	15.19	15.23	15.24	5		
		6	0	15.23	15.28	15.24	5		

LTE Conducted Power (Laptop Mode Reduction)							
LTE Band 13							
BW	MCS Index	RB Size	RB Offset		Mid		3GPP MPR (dB)
		Channel			23230		
		Frequency (MHz)			782		
10M	QPSK	1	0		19.96		0
		1	24		19.87		0
		1	49		19.81		0
		25	0		18.86		1
		25	12		18.82		1
		25	25		18.81		1
		50	0		18.86		1
10M	16QAM	1	0		18.88		1
		1	24		18.84		1
		1	49		18.78		1
		25	0		17.89		2
		25	12		17.84		2
		25	25		17.81		2
		50	0		17.85		2
10M	64QAM	1	0		17.88		2
		1	24		17.83		2
		1	49		17.82		2
		25	0		16.91		3
		25	12		16.89		3
		25	25		16.87		3
		50	0		16.86		3
10M	256QAM	1	0		14.86		5
		1	24		14.77		5
		1	49		14.84		5
		25	0		14.70		5
		25	12		14.82		5
		25	25		14.72		5
		50	0		14.81		5
BW	MCS Index	Channel		23205	23230	23255	3GPP MPR
		Frequency (MHz)		779.5	782	784.5	
5M	QPSK	1	0	19.87	19.91	19.89	0
		1	12	19.78	19.81	19.87	0
		1	24	19.78	19.72	19.78	0
		12	0	18.86	18.78	18.84	1
		12	6	18.72	18.75	18.80	1
		12	13	18.72	18.71	18.72	1
		25	0	18.84	18.85	18.81	1
5M	16QAM	1	0	18.83	18.88	18.85	1
		1	12	18.80	18.74	18.83	1
		1	24	18.75	18.68	18.69	1
		12	0	17.84	17.85	17.79	2
		12	6	17.76	17.77	17.75	2
		12	13	17.71	17.71	17.72	2
		25	0	17.82	17.75	17.76	2
5M	64QAM	1	0	17.78	17.81	17.87	2
		1	12	17.81	17.73	17.73	2
		1	24	17.80	17.78	17.73	2
		12	0	16.88	16.89	16.83	3
		12	6	16.88	16.80	16.88	3
		12	13	16.81	16.77	16.83	3
		25	0	16.86	16.84	16.83	3
5M	256QAM	1	0	14.69	14.63	14.86	5
		1	12	14.76	14.80	14.73	5
		1	24	14.76	14.77	14.81	5
		12	0	14.71	14.78	14.64	5
		12	6	14.73	14.68	14.78	5
		12	13	14.78	14.80	14.70	5
		25	0	14.64	14.75	14.72	5

LTE Conducted Power (Laptop Mode Reduction)							
LTE Band 14							
BW	MCS Index	RB Size	RB Offset		Mid		3GPP MPR (dB)
		Channel			23330		
		Frequency (MHz)			793		
10M	QPSK	1	0		19.94		0
		1	24		19.89		0
		1	49		19.80		0
		25	0		18.89		1
		25	12		18.82		1
		25	25		18.81		1
		50	0		18.79		1
10M	16QAM	1	0		18.91		1
		1	24		18.89		1
		1	49		18.85		1
		25	0		17.85		2
		25	12		17.81		2
		25	25		17.79		2
		50	0		17.88		2
10M	64QAM	1	0		17.84		2
		1	24		17.77		2
		1	49		17.73		2
		25	0		16.89		3
		25	12		16.84		3
		25	25		16.81		3
		50	0		16.88		3
10M	256QAM	1	0		14.63		5
		1	24		14.78		5
		1	49		14.82		5
		25	0		14.84		5
		25	12		14.66		5
		25	25		14.80		5
		50	0		14.77		5
BW	MCS Index	Channel		23305	23330	23355	3GPP MPR
		Frequency (MHz)		790.5	793	795.5	
5M	QPSK	1	0	19.85	19.90	19.78	0
		1	12	19.73	19.82	19.73	0
		1	24	19.66	19.69	19.71	0
		12	0	18.83	18.69	18.76	1
		12	6	18.71	18.67	18.70	1
		12	13	18.72	18.67	18.62	1
		25	0	18.67	18.62	18.72	1
5M	16QAM	1	0	18.82	18.81	18.78	1
		1	12	18.76	18.81	18.84	1
		1	24	18.70	18.82	18.75	1
		12	0	17.83	17.84	17.77	2
		12	6	17.67	17.77	17.61	2
		12	13	17.61	17.74	17.64	2
		25	0	17.83	17.77	17.76	2
5M	64QAM	1	0	17.71	17.74	17.74	2
		1	12	17.58	17.64	17.71	2
		1	24	17.55	17.65	17.59	2
		12	0	16.76	16.78	16.71	3
		12	6	16.78	16.73	16.72	3
		12	13	16.74	16.80	16.70	3
		25	0	16.80	16.71	16.78	3
5M	256QAM	1	0	14.90	14.89	14.82	5
		1	12	14.77	14.72	14.77	5
		1	24	14.83	14.83	14.80	5
		12	0	14.74	14.71	14.81	5
		12	6	14.77	14.71	14.88	5
		12	13	14.77	14.76	14.72	5
		25	0	14.83	14.76	14.77	5

LTE Conducted Power (Laptop Mode Reduction)									
LTE Band 17									
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)		
		Channel		23780	23790	23800			
		Frequency (MHz)		709	710	711			
10M	QPSK	1	0	20.22	20.28	20.25	0		
		1	24	20.13	20.21	20.16	0		
		1	49	20.13	20.19	20.15	0		
		25	0	19.18	19.23	19.19	1		
		25	12	19.17	19.21	19.18	1		
		25	25	19.08	19.11	19.03	1		
10M	16QAM	50	0	19.16	19.20	19.16	1		
		1	0	19.14	19.21	19.14	1		
		1	24	19.09	19.18	19.11	1		
		1	49	19.11	19.11	19.08	1		
		25	0	18.07	18.16	18.16	2		
		25	12	18.04	18.11	18.06	2		
10M	64QAM	25	25	18.00	18.04	17.98	2		
		50	0	18.05	18.14	18.05	2		
		1	0	18.11	18.18	18.12	2		
		1	24	18.08	18.13	18.07	2		
		1	49	17.96	18.04	18.00	2		
		25	0	17.03	17.08	17.05	3		
10M	256QAM	25	12	17.04	17.06	16.98	3		
		25	25	16.91	17.01	16.91	3		
		50	0	17.01	17.10	17.05	3		
		1	0	15.44	15.34	15.39	5		
		1	24	15.36	15.34	15.37	5		
		1	49	15.32	15.31	15.37	5		
10M	256QAM	25	0	15.23	15.33	15.33	5		
		25	12	15.27	15.32	15.33	5		
		25	25	15.24	15.25	15.22	5		
		50	0	15.25	15.25	15.29	5		
		BW	MCS Index	Channel		23755	23790	23825	3GPP MPR
		Frequency (MHz)		706.5	710	713.5			
5M	QPSK	1	0	20.12	20.23	20.19	0		
		1	12	20.05	20.19	20.15	0		
		1	24	20.07	20.16	20.08	0		
		12	0	19.16	19.15	19.19	1		
		12	6	19.11	19.16	19.15	1		
		12	13	19.06	19.03	18.96	1		
5M	16QAM	25	0	19.09	19.10	19.13	1		
		1	0	19.14	19.17	19.11	1		
		1	12	19.03	19.09	19.03	1		
		1	24	19.11	19.06	18.99	1		
		12	0	17.97	18.08	18.07	2		
		12	6	18.00	18.05	18.00	2		
5M	64QAM	12	13	17.99	17.98	17.97	2		
		25	0	17.96	18.10	18.02	2		
		1	0	18.03	18.17	18.12	2		
		1	12	18.06	18.04	17.97	2		
		1	24	17.96	17.94	17.91	2		
		12	0	16.97	16.98	16.95	3		
5M	256QAM	12	6	16.99	16.99	16.96	3		
		12	13	16.91	16.92	16.89	3		
		25	0	16.98	17.00	17.02	3		
		1	0	15.19	15.32	15.27	5		
		1	12	15.27	15.33	15.32	5		
		1	24	15.30	15.25	15.28	5		
5M	256QAM	12	0	15.33	15.20	15.18	5		
		12	6	15.13	15.24	15.24	5		
		12	13	15.23	15.36	15.28	5		
		25	0	15.22	15.28	15.15	5		

LTE Conducted Power (Laptop Mode Reduction)									
LTE Band 25									
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)		
		Channel		26140	26365	26590			
		Frequency (MHz)		1860	1882.5	1905			
20M	QPSK	1	0	16.94	16.98	16.89	0		
		1	50	16.91	16.93	16.83	0		
		1	99	16.85	16.88	16.81	0		
		50	0	15.85	15.86	15.81	1		
		50	25	15.74	15.82	15.77	1		
		50	50	15.75	15.79	15.75	1		
20M	16QAM	100	0	15.71	15.72	15.70	1		
		1	0	15.82	15.84	15.77	1		
		1	50	15.77	15.83	15.82	1		
		1	99	15.64	15.74	15.72	1		
		50	0	14.85	14.89	14.85	2		
		50	25	14.76	14.80	14.73	2		
20M	64QAM	50	50	14.77	14.77	14.68	2		
		100	0	14.64	14.72	14.65	2		
		1	0	14.78	14.83	14.79	2		
		1	50	14.75	14.75	14.65	2		
		1	99	14.66	14.68	14.58	2		
		50	0	13.70	13.80	13.72	3		
20M	256QAM	50	25	13.73	13.81	13.78	3		
		50	50	13.67	13.75	13.73	3		
		100	0	13.71	13.78	13.72	3		
		1	0	11.89	11.94	11.83	5		
		1	50	11.80	11.82	11.87	5		
		1	99	11.80	11.88	11.85	5		
20M	256QAM	50	0	11.71	11.77	11.81	5		
		50	25	11.81	11.89	11.89	5		
		50	50	11.69	11.77	11.70	5		
		100	0	11.77	11.84	11.78	5		
		BW	MCS Index	Channel		26115	26365	26615	3GPP MPR
		Frequency (MHz)		1857.5	1882.5	1907.5			
15M	QPSK	1	0	16.92	16.95	16.79	0		
		1	37	16.86	16.84	16.73	0		
		1	74	16.79	16.86	16.75	0		
		36	0	15.79	15.79	15.77	1		
		36	19	15.64	15.80	15.69	1		
		36	39	15.69	15.71	15.70	1		
15M	16QAM	75	0	15.66	15.63	15.69	1		
		1	0	15.77	15.76	15.72	1		
		1	37	15.69	15.76	15.72	1		
		1	74	15.57	15.64	15.67	1		
		36	0	14.83	14.88	14.78	2		
		36	19	14.66	14.74	14.68	2		
15M	64QAM	36	39	14.72	14.70	14.58	2		
		75	0	14.64	14.69	14.64	2		
		1	0	14.71	14.82	14.70	2		
		1	37	14.69	14.69	14.60	2		
		1	74	14.57	14.60	14.49	2		
		36	0	13.63	13.79	13.71	3		
15M	256QAM	36	19	13.67	13.80	13.72	3		
		36	39	13.63	13.73	13.71	3		
		75	0	13.67	13.74	13.70	3		
		1	0	11.67	11.73	11.74	5		
		1	37	11.81	11.81	11.80	5		
		1	74	11.79	11.77	11.87	5		
15M	256QAM	36	0	11.80	11.69	11.78	5		
		36	19	11.67	11.75	11.73	5		
		36	39	11.79	11.81	11.75	5		
		75	0	11.78	11.80	11.63	5		

LTE Conducted Power (Laptop Mode Reduction)									
LTE Band 25									
BW	MCS Index	Channel		26090	26365	26640	3GPP MPR		
		Frequency (MHz)		1855	1882.5	1910			
10M	QPSK	1	0	16.90	16.90	16.83	0		
		1	24	16.90	16.90	16.83	0		
		1	49	16.85	16.79	16.75	0		
		25	0	15.76	15.80	15.71	1		
		25	12	15.74	15.72	15.76	1		
		25	25	15.75	15.72	15.70	1		
10M	16QAM	50	0	15.68	15.71	15.71	1		
		1	0	15.75	15.78	15.76	1		
		1	24	15.70	15.79	15.79	1		
		1	49	15.55	15.68	15.63	1		
		25	0	14.75	14.86	14.85	2		
		25	12	14.76	14.76	14.68	2		
10M	64QAM	25	25	14.68	14.70	14.65	2		
		50	0	14.54	14.62	14.58	2		
		1	0	14.77	14.75	14.79	2		
		1	24	14.72	14.69	14.57	2		
		1	49	14.57	14.58	14.55	2		
		25	0	13.69	13.79	13.63	3		
10M	256QAM	25	12	13.66	13.75	13.68	3		
		25	25	13.60	13.74	13.65	3		
		50	0	13.69	13.71	13.70	3		
		1	0	11.74	11.74	11.68	5		
		1	24	11.83	11.82	11.76	5		
		1	49	11.77	11.83	11.77	5		
10M	256QAM	25	0	11.78	11.78	11.82	5		
		25	12	11.73	11.75	11.79	5		
		25	25	11.77	11.81	11.79	5		
		50	0	11.66	11.70	11.69	5		
		BW	MCS Index	Channel		26065	26365	26665	3GPP MPR
				Frequency (MHz)		1852.5	1882.5	1912.5	
5M	QPSK	1	0	16.88	16.96	16.82	0		
		1	12	16.82	16.86	16.78	0		
		1	24	16.84	16.82	16.73	0		
		12	0	15.78	15.79	15.74	1		
		12	6	15.72	15.74	15.73	1		
		12	13	15.73	15.79	15.68	1		
5M	16QAM	25	0	15.68	15.69	15.66	1		
		1	0	15.72	15.82	15.70	1		
		1	12	15.77	15.76	15.76	1		
		1	24	15.56	15.66	15.64	1		
		12	0	14.76	14.89	14.76	2		
		12	6	14.76	14.79	14.65	2		
5M	64QAM	12	13	14.67	14.70	14.67	2		
		25	0	14.56	14.67	14.56	2		
		1	0	14.76	14.74	14.77	2		
		1	12	14.72	14.67	14.62	2		
		1	24	14.58	14.66	14.55	2		
		12	0	13.69	13.70	13.62	3		
5M	256QAM	12	6	13.65	13.77	13.71	3		
		12	13	13.67	13.71	13.63	3		
		25	0	13.62	13.74	13.64	3		
		1	0	11.80	11.93	11.81	5		
		1	12	11.80	11.73	11.86	5		
		1	24	11.71	11.79	11.79	5		
5M	256QAM	12	0	11.65	11.76	11.72	5		
		12	6	11.79	11.85	11.82	5		
		12	13	11.63	11.74	11.66	5		
		25	0	11.71	11.82	11.69	5		

LTE Conducted Power (Laptop Mode Reduction)									
LTE Band 25									
BW	MCS Index	Channel		26055	26365	26675	3GPP MPR		
		Frequency (MHz)		1851.5	1882.5	1913.5			
3M	QPSK	1	0	16.90	16.89	16.89	0		
		1	7	16.89	16.88	16.73	0		
		1	14	16.82	16.78	16.71	0		
		8	0	15.80	15.79	15.75	1		
		8	3	15.71	15.79	15.73	1		
		8	7	15.67	15.70	15.70	1		
3M	16QAM	15	0	15.61	15.62	15.65	1		
		1	0	15.77	15.75	15.76	1		
		1	7	15.69	15.73	15.81	1		
		1	14	15.62	15.65	15.63	1		
		8	0	14.84	14.81	14.79	2		
		8	3	14.69	14.72	14.67	2		
3M	64QAM	8	7	14.70	14.70	14.67	2		
		15	0	14.58	14.63	14.60	2		
		1	0	14.70	14.74	14.69	2		
		1	7	14.70	14.67	14.60	2		
		1	14	14.58	14.60	14.58	2		
		8	0	13.70	13.74	13.64	3		
3M	256QAM	8	3	13.72	13.79	13.70	3		
		8	7	13.61	13.73	13.70	3		
		15	0	13.64	13.75	13.65	3		
		1	0	11.82	11.91	11.73	5		
		1	7	11.73	11.78	11.75	5		
		1	14	11.83	11.73	11.77	5		
3M	256QAM	8	0	11.76	11.66	11.86	5		
		8	3	11.76	11.81	11.80	5		
		8	7	11.69	11.68	11.77	5		
		15	0	11.73	11.81	11.71	5		
		BW	MCS Index	Channel		26047	26365	26683	3GPP MPR
		Frequency (MHz)		1850.7	1882.5	1914.3			
1.4M	QPSK	1	0	16.71	16.90	16.79	0		
		1	2	16.77	16.83	16.77	0		
		1	5	16.69	16.77	16.75	0		
		3	0	16.64	16.67	16.63	0		
		3	1	16.59	16.74	16.62	0		
		3	3	16.65	16.59	16.64	0		
1.4M	16QAM	6	0	15.60	15.48	15.64	1		
		1	0	15.67	15.78	15.61	1		
		1	2	15.59	15.65	15.66	1		
		1	5	15.55	15.68	15.54	1		
		3	0	15.77	15.75	15.75	1		
		3	1	15.60	15.69	15.53	1		
1.4M	64QAM	3	3	15.68	15.69	15.50	1		
		6	0	14.42	14.56	14.54	2		
		1	0	14.57	14.74	14.59	2		
		1	2	14.60	14.64	14.60	2		
		1	5	14.51	14.46	14.41	2		
		3	0	14.58	14.67	14.63	2		
1.4M	256QAM	3	1	14.57	14.67	14.62	2		
		3	3	14.51	14.58	14.57	2		
		6	0	13.54	13.70	13.52	3		
		1	0	11.85	11.91	11.80	5		
		1	2	11.75	11.81	11.84	5		
		1	5	11.80	11.84	11.80	5		
1.4M	256QAM	3	0	11.69	11.77	11.71	5		
		3	1	11.74	11.85	11.88	5		
		3	3	11.61	11.75	11.68	5		
		6	0	11.75	11.84	11.69	5		

LTE Conducted Power (Laptop Mode Reduction)							
LTE Band 26							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		26765	26865	26965	
		Frequency (MHz)		821.5	831.5	841.5	
15M	QPSK	1	0	19.81	19.84	19.82	0
		1	37	19.75	19.81	19.77	0
		1	74	19.72	19.78	19.70	0
		36	0	18.69	18.77	18.74	1
		36	19	18.69	18.72	18.72	1
		36	39	18.60	18.70	18.61	1
		75	0	18.68	18.75	18.71	1
15M	16QAM	1	0	18.88	18.88	18.80	1
		1	37	18.77	18.84	18.78	1
		1	74	18.76	18.78	18.68	1
		36	0	17.78	17.83	17.76	2
		36	19	17.75	17.76	17.69	2
		36	39	17.72	17.74	17.65	2
		75	0	17.60	17.68	17.63	2
15M	64QAM	1	0	17.76	17.77	17.69	2
		1	37	17.61	17.64	17.57	2
		1	74	17.53	17.58	17.55	2
		36	0	16.68	16.73	16.71	3
		36	19	16.64	16.71	16.70	3
		36	39	16.67	16.69	16.59	3
		75	0	16.62	16.71	16.61	3
15M	256QAM	1	0	14.94	14.86	14.85	5
		1	37	14.80	14.86	14.80	5
		1	74	14.78	14.81	14.87	5
		36	0	14.79	14.80	14.83	5
		36	19	14.80	14.87	14.90	5
		36	39	14.76	14.77	14.75	5
		75	0	14.78	14.79	14.78	5
BW	MCS Index	Channel		26740	26865	26990	3GPP MPR
Frequency (MHz)		819	831.5	844			
10M	QPSK	1	0	19.72	19.74	19.73	0
		1	24	19.73	19.76	19.67	0
		1	49	19.66	19.78	19.68	0
		25	0	18.67	18.69	18.66	1
		25	12	18.66	18.70	18.64	1
		25	25	18.54	18.66	18.57	1
		50	0	18.66	18.70	18.63	1
10M	16QAM	1	0	18.81	18.85	18.78	1
		1	24	18.72	18.78	18.71	1
		1	49	18.72	18.77	18.65	1
		25	0	17.71	17.74	17.76	2
		25	12	17.73	17.73	17.66	2
		25	25	17.70	17.74	17.61	2
		50	0	17.56	17.58	17.56	2
10M	64QAM	1	0	17.72	17.77	17.68	2
		1	24	17.58	17.61	17.47	2
		1	49	17.46	17.50	17.53	2
		25	0	16.67	16.69	16.61	3
		25	12	16.56	16.69	16.70	3
		25	25	16.61	16.61	16.53	3
		50	0	16.60	16.66	16.52	3
10M	256QAM	1	0	14.71	14.81	14.68	5
		1	24	14.84	14.83	14.82	5
		1	49	14.74	14.76	14.88	5
		25	0	14.79	14.79	14.76	5
		25	12	14.60	14.76	14.74	5
		25	25	14.81	14.87	14.75	5
		50	0	14.71	14.74	14.69	5

LTE Conducted Power (Laptop Mode Reduction)									
LTE Band 26									
BW	MCS Index	Channel		26715	26865	27015	3GPP MPR		
		Frequency (MHz)		816.5	831.5	846.5			
5M	QPSK	1	0	19.76	19.81	19.78	0		
		1	12	19.74	19.74	19.76	0		
		1	24	19.67	19.74	19.62	0		
		12	0	18.66	18.70	18.67	1		
		12	6	18.67	18.65	18.65	1		
		12	13	18.60	18.70	18.53	1		
5M	16QAM	25	0	18.66	18.74	18.71	1		
		1	0	18.79	18.85	18.72	1		
		1	12	18.70	18.78	18.69	1		
		1	24	18.67	18.68	18.65	1		
		12	0	17.77	17.77	17.69	2		
		12	6	17.71	17.72	17.67	2		
5M	64QAM	12	13	17.64	17.68	17.61	2		
		25	0	17.58	17.68	17.56	2		
		1	0	17.71	17.67	17.66	2		
		1	12	17.53	17.59	17.51	2		
		1	24	17.53	17.52	17.52	2		
		12	0	16.67	16.67	16.64	3		
5M	256QAM	12	6	16.56	16.61	16.70	3		
		12	13	16.67	16.68	16.56	3		
		25	0	16.52	16.64	16.61	3		
		1	0	14.70	14.65	14.62	5		
		1	12	14.77	14.85	14.79	5		
		1	24	14.77	14.83	14.79	5		
5M	256QAM	12	0	14.71	14.73	14.80	5		
		12	6	14.74	14.74	14.77	5		
		12	13	14.78	14.81	14.83	5		
		25	0	14.68	14.68	14.71	5		
		BW	MCS Index	Channel		26705	26865	27025	3GPP MPR
				Frequency (MHz)		815.5	831.5	847.5	
3M	QPSK	1	0	19.78	19.83	19.78	0		
		1	7	19.74	19.78	19.67	0		
		1	14	19.62	19.70	19.66	0		
		8	0	18.69	18.70	18.66	1		
		8	3	18.66	18.69	18.65	1		
		8	7	18.56	18.60	18.58	1		
3M	16QAM	15	0	18.66	18.75	18.63	1		
		1	0	18.86	18.81	18.76	1		
		1	7	18.72	18.79	18.75	1		
		1	14	18.69	18.77	18.63	1		
		8	0	17.76	17.78	17.67	2		
		8	3	17.70	17.72	17.63	2		
3M	64QAM	8	7	17.62	17.68	17.55	2		
		15	0	17.60	17.58	17.61	2		
		1	0	17.70	17.73	17.60	2		
		1	7	17.60	17.57	17.48	2		
		1	14	17.43	17.57	17.49	2		
		8	0	16.60	16.73	16.69	3		
3M	256QAM	8	3	16.59	16.67	16.63	3		
		8	7	16.63	16.68	16.55	3		
		15	0	16.52	16.63	16.56	3		
		1	0	14.86	14.86	14.79	5		
		1	7	14.73	14.77	14.78	5		
		1	14	14.69	14.76	14.80	5		
3M	256QAM	8	0	14.73	14.77	14.83	5		
		8	3	14.77	14.82	14.85	5		
		8	7	14.66	14.70	14.70	5		
		15	0	14.77	14.76	14.72	5		

LTE Conducted Power (Laptop Mode Reduction)							
LTE Band 26							
BW	MCS Index	Channel		26697	26865	27033	3GPP MPR
		Frequency (MHz)		814.7	831.5	848.3	
1.4M	QPSK	1	0	19.78	19.79	19.69	0
		1	2	19.60	19.76	19.67	0
		1	5	19.53	19.64	19.49	0
		3	0	19.58	19.55	19.58	0
		3	1	19.53	19.53	19.54	0
		3	3	19.42	19.61	19.44	0
		6	0	18.51	18.51	18.64	1
1.4M	16QAM	1	0	18.76	18.81	18.79	1
		1	2	18.58	18.70	18.72	1
		1	5	18.68	18.62	18.63	1
		3	0	18.67	18.65	18.58	1
		3	1	18.66	18.73	18.46	1
		3	3	18.61	18.58	18.54	1
		6	0	17.48	17.49	17.56	2
1.4M	64QAM	1	0	17.71	17.68	17.57	2
		1	2	17.60	17.61	17.50	2
		1	5	17.41	17.55	17.49	2
		3	0	17.65	17.59	17.71	2
		3	1	17.55	17.66	17.61	2
		3	3	17.55	17.57	17.43	2
		6	0	16.51	16.63	16.45	3
1.4M	256QAM	1	0	14.91	14.86	14.79	5
		1	2	14.78	14.80	14.78	5
		1	5	14.74	14.75	14.78	5
		3	0	14.75	14.73	14.80	5
		3	1	14.80	14.85	14.85	5
		3	3	14.76	14.71	14.67	5
		6	0	14.69	14.71	14.76	5

LTE Conducted Power (Laptop Mode Reduction)								
LTE Band 30								
BW	MCS Index	RB Size	RB Offset		Mid		3GPP MPR (dB)	
		Channel			27710			
		Frequency (MHz)			2310			
10M	QPSK	1	0		16.98		0	
		1	24		16.96		0	
		1	49		16.94		0	
		25	0		15.98		1	
		25	12		15.97		1	
		25	25		15.94		1	
		50	0		15.92		1	
10M	16QAM	1	0		15.96		1	
		1	24		15.93		1	
		1	49		15.91		1	
		25	0		14.96		2	
		25	12		14.93		2	
		25	25		14.95		2	
		50	0		14.93		2	
10M	64QAM	1	0		14.96		2	
		1	24		14.84		2	
		1	49		14.83		2	
		25	0		13.96		3	
		25	12		13.85		3	
		25	25		13.83		3	
		50	0		13.81		3	
10M	256QAM	1	0		11.73		5	
		1	24		11.76		5	
		1	49		11.83		5	
		25	0		11.75		5	
		25	12		11.75		5	
		25	25		11.83		5	
		50	0		11.68		5	
BW	MCS Index	Channel		27685	27710	27735	3GPP MPR	
		Frequency (MHz)		2307.5	2310	2312.5		
5M	QPSK	1	0		16.93	16.96	16.92	0
		1	12		16.90	16.92	16.90	0
		1	24		16.91	16.88	16.94	0
		12	0		15.93	15.91	15.91	1
		12	6		15.89	15.90	15.87	1
		12	13		15.94	15.87	15.87	1
		25	0		15.91	15.85	15.87	1
5M	16QAM	1	0		15.89	15.91	15.86	1
		1	12		15.87	15.88	15.90	1
		1	24		15.86	15.81	15.89	1
		12	0		14.87	14.95	14.96	2
		12	6		14.87	14.88	14.89	2
		12	13		14.89	14.85	14.85	2
		25	0		14.93	14.91	14.89	2
5M	64QAM	1	0		14.94	14.94	14.88	2
		1	12		14.80	14.81	14.76	2
		1	24		14.81	14.81	14.74	2
		12	0		13.95	13.94	13.87	3
		12	6		13.79	13.75	13.83	3
		12	13		13.80	13.74	13.75	3
		25	0		13.80	13.81	13.80	3
5M	256QAM	1	0		11.81	11.84	11.83	5
		1	12		11.79	11.79	11.83	5
		1	24		11.81	11.81	11.77	5
		12	0		11.82	11.82	11.70	5
		12	6		11.91	11.91	11.85	5
		12	13		11.81	11.81	11.72	5
		25	0		11.84	11.84	11.73	5

LTE Conducted Power (Laptop Mode Reduction)							
LTE Band 38							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		37850	38000	38150	
		Frequency (MHz)		2580	2595	2610	
20M	QPSK	1	0	20.21	20.29	20.31	0
		1	50	20.22	20.14	20.24	0
		1	99	20.21	20.18	20.23	0
		50	0	19.22	19.29	19.31	1
		50	25	19.21	19.19	19.25	1
		50	50	19.14	19.15	19.24	1
		100	0	19.20	19.15	19.25	1
20M	16QAM	1	0	19.35	19.38	19.41	1
		1	50	19.31	19.30	19.32	1
		1	99	19.24	19.26	19.31	1
		50	0	18.32	18.25	18.34	2
		50	25	18.13	18.18	18.21	2
		50	50	18.13	18.10	18.14	2
		100	0	18.12	18.15	18.21	2
20M	64QAM	1	0	18.13	18.11	18.14	2
		1	50	18.06	17.99	18.09	2
		1	99	18.03	17.93	18.03	2
		50	0	17.44	17.40	17.46	3
		50	25	17.29	17.37	17.37	3
		50	50	17.23	17.28	17.31	3
		100	0	17.27	17.27	17.35	3
20M	256QAM	1	0	15.33	15.35	15.35	5
		1	50	15.28	15.31	15.36	5
		1	99	15.22	15.30	15.30	5
		50	0	15.20	15.34	15.35	5
		50	25	15.33	15.33	15.37	5
		50	50	15.23	15.29	15.26	5
		100	0	15.32	15.25	15.30	5
BW	MCS Index	Channel		37825	38000	38175	3GPP MPR
		Frequency (MHz)		2577.5	2595	2612.5	
15M	QPSK	1	0	20.12	20.26	20.29	0
		1	37	20.22	20.06	20.15	0
		1	74	20.15	20.11	20.18	0
		36	0	19.13	19.29	19.21	1
		36	19	19.19	19.09	19.17	1
		36	39	19.04	19.12	19.21	1
		75	0	19.14	19.07	19.23	1
15M	16QAM	1	0	19.33	19.36	19.38	1
		1	37	19.22	19.23	19.25	1
		1	74	19.14	19.23	19.25	1
		36	0	18.23	18.25	18.27	2
		36	19	18.06	18.18	18.12	2
		36	39	18.06	18.10	18.05	2
		75	0	18.02	18.07	18.14	2
15M	64QAM	1	0	18.13	18.02	18.09	2
		1	37	18.02	17.93	18.05	2
		1	74	17.97	17.88	17.95	2
		36	0	17.40	17.38	17.44	3
		36	19	17.27	17.27	17.34	3
		36	39	17.17	17.27	17.25	3
		75	0	17.17	17.25	17.28	3
15M	256QAM	1	0	15.18	15.23	15.25	5
		1	37	15.31	15.38	15.31	5
		1	74	15.12	15.24	15.34	5
		36	0	15.17	15.26	15.22	5
		36	19	15.17	15.17	15.29	5
		36	39	15.26	15.34	15.24	5
		75	0	15.21	15.22	15.15	5

LTE Conducted Power (Laptop Mode Reduction)									
LTE Band 38									
BW	MCS Index	Channel		37800	38000	38200	3GPP MPR		
		Frequency (MHz)		2575	2595	2615			
10M	QPSK	1	0	20.12	20.29	20.22	0		
		1	24	20.21	20.09	20.14	0		
		1	49	20.15	20.08	20.19	0		
		25	0	19.22	19.28	19.26	1		
		25	12	19.15	19.13	19.15	1		
		25	25	19.13	19.14	19.19	1		
10M	16QAM	50	0	19.14	19.11	19.23	1		
		1	0	19.26	19.29	19.33	1		
		1	24	19.27	19.25	19.27	1		
		1	49	19.24	19.24	19.23	1		
		25	0	18.25	18.17	18.26	2		
		25	12	18.07	18.09	18.16	2		
10M	64QAM	25	25	18.04	18.06	18.14	2		
		50	0	18.09	18.09	18.12	2		
		1	0	18.03	18.04	18.04	2		
		1	24	18.01	17.97	17.99	2		
		1	49	18.01	17.83	17.94	2		
		25	0	17.43	17.36	17.40	3		
10M	256QAM	25	12	17.27	17.34	17.27	3		
		25	25	17.20	17.18	17.22	3		
		50	0	17.17	17.17	17.33	3		
		1	0	15.17	15.18	15.13	5		
		1	24	15.28	15.27	15.24	5		
		1	49	15.24	15.31	15.26	5		
10M	256QAM	25	0	15.23	15.28	15.30	5		
		25	12	15.24	15.24	15.30	5		
		25	25	15.15	15.26	15.39	5		
		50	0	15.20	15.22	15.24	5		
		BW	MCS Index	Channel		37775	38000	38225	3GPP MPR
				Frequency (MHz)		2572.5	2595	2617.5	
5M	QPSK	1	0	20.20	20.27	20.20	0		
		1	12	20.16	20.06	20.24	0		
		1	24	20.14	20.15	20.15	0		
		12	0	19.19	19.26	19.24	1		
		12	6	19.15	19.12	19.25	1		
		12	13	19.05	19.10	19.20	1		
5M	16QAM	25	0	19.10	19.12	19.24	1		
		1	0	19.25	19.37	19.33	1		
		1	12	19.26	19.29	19.28	1		
		1	24	19.21	19.21	19.27	1		
		12	0	18.26	18.21	18.32	2		
		12	6	18.13	18.12	18.13	2		
5M	64QAM	12	13	18.08	18.08	18.11	2		
		25	0	18.09	18.07	18.18	2		
		1	0	18.10	18.11	18.04	2		
		1	12	18.06	17.89	18.07	2		
		1	24	17.97	17.91	17.98	2		
		12	0	17.34	17.31	17.42	3		
5M	256QAM	12	6	17.27	17.28	17.35	3		
		12	13	17.15	17.26	17.26	3		
		25	0	17.21	17.19	17.31	3		
		1	0	15.30	15.35	15.30	5		
		1	12	15.25	15.27	15.32	5		
		1	24	15.13	15.29	15.26	5		
5M	256QAM	12	0	15.13	15.27	15.34	5		
		12	6	15.30	15.31	15.27	5		
		12	13	15.19	15.21	15.18	5		
		25	0	15.30	15.16	15.24	5		

LTE Conducted Power (Laptop Mode Reduction)									
LTE Band 40									
BW	MCS Index	RB Size	RB Offset	Low	Mid	Mid	3GPP MPR (dB)		
		Channel		38750	39150	39550			
		Frequency (MHz)		2310	2350	2390			
20M	QPSK	1	0	19.94	19.96	19.92	0		
		1	50	19.85	19.93	19.90	0		
		1	99	19.80	19.87	19.82	0		
		50	0	18.95	18.96	18.86	1		
		50	25	18.92	18.92	18.89	1		
		50	50	18.90	18.91	18.89	1		
		100	0	18.90	18.96	18.94	1		
20M	16QAM	1	0	18.92	18.94	18.88	1		
		1	50	18.86	18.91	18.82	1		
		1	99	18.85	18.88	18.78	1		
		50	0	17.95	17.96	17.90	2		
		50	25	17.90	17.92	17.87	2		
		50	50	17.85	17.90	17.87	2		
20M	64QAM	1	0	17.89	17.91	17.81	2		
		1	50	17.83	17.90	17.85	2		
		1	99	17.83	17.88	17.84	2		
		50	0	16.98	16.98	16.94	3		
		50	25	16.95	16.96	16.95	3		
		50	50	16.85	16.92	16.88	3		
20M	256QAM	1	0	14.75	14.86	14.75	5		
		1	50	14.65	14.71	14.80	5		
		1	99	14.67	14.81	14.78	5		
		50	0	14.69	14.73	14.84	5		
		50	25	14.77	14.84	14.75	5		
		50	50	14.62	14.73	14.74	5		
20M	256QAM	100	0	14.72	14.77	14.75	5		
		Channel	38725	39150	39575	3GPP MPR			
		Frequency (MHz)	2307.5	2350	2392.5				
		15M	QPSK	1	0	19.87	19.85	19.89	0
				1	37	19.79	19.86	19.87	0
				1	74	19.77	19.83	19.82	0
36	0			18.88	18.96	18.76	1		
36	19			18.89	18.86	18.88	1		
36	39			18.87	18.90	18.82	1		
75	0			18.85	18.92	18.92	1		
15M	16QAM	1	0	18.86	18.84	18.79	1		
		1	37	18.77	18.86	18.82	1		
		1	74	18.82	18.88	18.69	1		
		36	0	17.86	17.95	17.86	2		
		36	19	17.81	17.88	17.77	2		
		36	39	17.84	17.83	17.79	2		
15M	64QAM	75	0	17.84	17.90	17.86	2		
		1	0	17.80	17.89	17.78	2		
		1	37	17.74	17.83	17.80	2		
		1	74	17.78	17.88	17.79	2		
		36	0	16.88	16.88	16.87	3		
		36	19	16.88	16.86	16.91	3		
15M	256QAM	36	39	16.76	16.87	16.86	3		
		75	0	16.77	16.91	16.78	3		
		1	0	14.75	14.87	14.82	5		
		1	37	14.65	14.74	14.82	5		
		1	74	14.67	14.77	14.75	5		
		36	0	14.70	14.69	14.84	5		
15M	256QAM	36	19	14.82	14.85	14.76	5		
		36	39	14.61	14.69	14.69	5		
		75	0	14.69	14.78	14.75	5		

LTE Conducted Power (Laptop Mode Reduction)							
LTE Band 40							
BW	MCS Index	Channel		38700	39150	39600	3GPP MPR
		Frequency (MHz)		2305	2350	2395	
10M	QPSK	1	0	19.87	19.85	19.83	0
		1	24	19.75	19.83	19.84	0
		1	49	19.77	19.82	19.77	0
		25	0	18.88	18.95	18.84	1
		25	12	18.86	18.86	18.82	1
		25	25	18.87	18.84	18.81	1
10M	16QAM	50	0	18.90	18.95	18.89	1
		1	0	18.82	18.85	18.80	1
		1	24	18.78	18.81	18.75	1
		1	49	18.84	18.82	18.71	1
		25	0	17.95	17.96	17.86	2
		25	12	17.81	17.85	17.85	2
10M	64QAM	25	25	17.76	17.83	17.82	2
		50	0	17.91	17.86	17.84	2
		1	0	17.81	17.89	17.73	2
		1	24	17.79	17.81	17.81	2
		1	49	17.77	17.81	17.75	2
		25	0	16.96	16.90	16.90	3
10M	256QAM	25	12	16.86	16.86	16.91	3
		25	25	16.79	16.89	16.83	3
		50	0	16.83	16.94	16.77	3
		1	0	14.67	14.81	14.81	5
		1	24	14.65	14.72	14.81	5
		1	49	14.64	14.77	14.80	5
5M	QPSK	25	0	14.70	14.71	14.79	5
		25	12	14.79	14.87	14.80	5
		25	25	14.66	14.71	14.78	5
		50	0	14.71	14.76	14.72	5
		1	0	19.85	19.93	19.83	0
		1	12	19.77	19.91	19.85	0
5M	16QAM	1	24	19.77	19.87	19.73	0
		12	0	18.87	18.87	18.83	1
		12	6	18.90	18.82	18.81	1
		12	13	18.87	18.89	18.83	1
		25	0	18.88	18.90	18.95	1
		1	0	18.89	18.88	18.88	1
5M	64QAM	1	12	18.85	18.91	18.81	1
		1	24	18.84	18.79	18.71	1
		12	0	17.86	17.88	17.88	2
		12	6	17.86	17.84	17.78	2
		12	13	17.80	17.90	17.84	2
		25	0	17.86	17.84	17.88	2
5M	256QAM	1	0	17.82	17.90	17.75	2
		1	12	17.74	17.83	17.84	2
		1	24	17.83	17.87	17.84	2
		12	0	16.95	16.88	16.87	3
		12	6	16.87	16.88	16.85	3
		12	13	16.75	16.86	16.85	3
5M	QPSK	25	0	16.85	16.87	16.84	3
		1	0	14.59	14.65	14.67	5
		1	12	14.68	14.81	14.80	5
		1	24	14.70	14.80	14.74	5
		12	0	14.78	14.81	14.81	5
		12	6	14.79	14.77	14.75	5
5M	16QAM	12	13	14.63	14.79	14.82	5
		25	0	14.70	14.63	14.70	5

LTE Conducted Power (Laptop Mode Reduction)									
LTE Band 41									
BW	MCS Index	RB Size	RB Offset	Low	Mid	Mid	Mid	High	3GPP MPR (dB)
		Channel		39750	40185	40620	41055	41490	
		Frequency (MHz)		2506	2549.5	2593	2636.5	2680	
20M	QPSK	1	0	17.43	17.22	17.44	17.32	17.38	0
		1	50	17.40	17.17	17.40	17.27	17.36	0
		1	99	17.32	17.14	17.36	17.25	17.37	0
		50	0	16.45	16.24	16.46	16.30	16.29	1
		50	25	16.36	16.24	16.42	16.35	16.36	1
		50	50	16.34	16.22	16.37	16.30	16.40	1
20M	16QAM	100	0	16.27	16.15	16.41	16.34	16.36	1
		1	0	16.41	16.22	16.25	16.33	16.32	1
		1	50	16.02	15.85	15.89	16.03	16.37	1
		1	99	15.72	15.48	15.57	15.67	16.39	1
		50	0	15.40	15.23	15.29	15.30	15.32	2
		50	25	15.29	15.04	15.23	15.24	15.28	2
20M	64QAM	50	50	15.22	14.99	15.07	15.09	15.34	2
		100	0	15.36	15.08	15.22	15.32	15.36	2
		1	0	15.18	15.05	15.06	15.13	15.41	2
		1	50	14.86	14.60	14.76	14.81	15.42	2
		1	99	14.54	14.29	14.36	14.47	15.39	2
		50	0	14.39	14.16	14.27	14.33	14.35	3
20M	256QAM	50	25	14.37	14.14	14.24	14.33	14.35	3
		50	50	14.34	14.12	14.19	14.28	14.38	3
		100	0	14.47	14.17	14.28	14.41	14.30	3
		1	0	12.34	12.34	12.26	12.23	12.27	5
		1	50	12.36	12.33	12.31	12.41	12.33	5
		1	99	12.32	12.35	12.20	12.22	12.29	5
BW	MCS Index	Channel		39725	40173	40620	41068	41515	3GPP MPR
		Frequency (MHz)		2503.5	2548.3	2593	2637.8	2682.5	
		1	0	17.37	17.24	17.33	17.34	17.31	
15M	QPSK	1	37	17.33	17.16	17.27	17.26	17.35	0
		1	74	17.36	17.15	17.17	17.19	17.29	0
		36	0	16.45	16.17	16.36	16.37	16.19	1
		36	19	16.41	16.20	16.24	16.36	16.34	1
		36	39	16.38	16.21	16.29	16.32	16.38	1
		75	0	16.28	16.15	16.25	16.36	16.33	1
15M	16QAM	1	0	16.37	16.24	16.31	16.35	16.33	1
		1	37	16.03	15.79	15.97	16.04	16.34	1
		1	74	15.69	15.46	15.59	15.68	16.30	1
		36	0	15.42	15.15	15.32	15.37	15.19	2
		36	19	15.26	15.13	15.14	15.24	15.28	2
		36	39	15.24	15.01	15.06	15.09	15.32	2
15M	64QAM	75	0	15.32	15.13	15.19	15.30	15.35	2
		1	0	15.25	14.96	15.11	15.11	15.36	2
		1	37	14.80	14.64	14.72	14.81	15.32	2
		1	74	14.52	14.31	14.38	14.47	15.33	2
		36	0	14.40	14.21	14.26	14.28	14.25	3
		36	19	14.38	14.16	14.24	14.34	14.35	3
15M	256QAM	36	39	14.28	14.12	14.19	14.23	14.30	3
		75	0	14.46	14.20	14.28	14.33	14.34	3
		1	0	12.19	12.15	12.27	12.30	12.28	5
		1	37	12.26	12.24	12.28	12.34	12.33	5
		1	74	12.35	12.28	12.19	12.28	12.26	5
		36	0	12.33	12.28	12.17	12.27	12.34	5
BW	MCS Index	Channel		39725	40173	40620	41068	41515	3GPP MPR
		Frequency (MHz)		2503.5	2548.3	2593	2637.8	2682.5	
		36	19	12.25	12.25	12.28	12.37	12.30	
BW	MCS Index	Channel		39725	40173	40620	41068	41515	3GPP MPR
		Frequency (MHz)		2503.5	2548.3	2593	2637.8	2682.5	
		36	39	12.23	12.31	12.16	12.29	12.14	
BW	MCS Index	Channel		39725	40173	40620	41068	41515	3GPP MPR
		Frequency (MHz)		2503.5	2548.3	2593	2637.8	2682.5	
		75	0	12.16	12.17	12.20	12.21	12.23	

LTE Conducted Power (Laptop Mode Reduction)									
LTE Band 41									
BW	MCS Index	Channel		39700	40160	40620	41080	41540	3GPP MPR
		Frequency (MHz)		2501	2547	2593	2639	2685	
10M	QPSK	1	0	17.28	17.23	17.28	17.24	17.31	0
		1	24	17.29	17.15	17.21	17.26	17.32	0
		1	49	17.34	17.13	17.09	17.12	17.25	0
		25	0	16.38	16.11	16.32	16.32	16.18	1
		25	12	16.41	16.18	16.14	16.35	16.24	1
		25	25	16.31	16.19	16.24	16.26	16.29	1
10M	16QAM	50	0	16.24	16.08	16.22	16.35	16.29	1
		1	0	16.29	16.19	16.31	16.33	16.25	1
		1	24	16.31	16.14	16.21	16.21	16.31	1
		1	49	16.31	16.11	16.17	16.14	16.21	1
		25	0	15.37	15.17	15.33	15.27	15.10	2
		25	12	15.40	15.19	15.18	15.26	15.33	2
10M	64QAM	25	25	15.35	15.18	15.28	15.31	15.30	2
		50	0	15.20	15.07	15.25	15.28	15.29	2
		1	0	15.27	15.14	15.24	15.25	15.23	2
		1	24	15.27	15.12	15.22	15.19	15.31	2
		1	49	15.34	15.07	15.08	15.17	15.24	2
		25	0	14.39	14.17	14.34	14.36	14.16	3
10M	256QAM	25	12	14.41	14.19	14.23	14.33	14.26	3
		25	25	14.30	14.15	14.19	14.25	14.33	3
		50	0	14.22	14.12	14.16	14.32	14.25	3
		1	0	12.29	12.33	12.22	12.31	12.32	5
		1	24	12.32	12.29	12.25	12.30	12.28	5
		1	49	12.32	12.35	12.17	12.30	12.26	5
5M	QPSK	25	0	12.21	12.25	12.13	12.27	12.25	5
		25	12	12.30	12.28	12.29	12.29	12.30	5
		25	25	12.20	12.21	12.15	12.26	12.18	5
		50	0	12.17	12.20	12.23	12.27	12.22	5
		Channel		39675	40148	40620	41093	41565	3GPP MPR
		Frequency (MHz)		2498.5	2545.8	2593	2640.3	2687.5	
5M	QPSK	1	0	17.35	17.17	17.29	17.25	17.27	0
		1	12	17.32	17.15	17.23	17.16	17.33	0
		1	24	17.36	17.05	17.07	17.16	17.29	0
		12	0	16.39	16.10	16.33	16.36	16.16	1
		12	6	16.40	16.11	16.20	16.29	16.31	1
		12	13	16.34	16.11	16.21	16.25	16.29	1
5M	16QAM	25	0	16.23	16.05	16.18	16.29	16.26	1
		1	0	16.30	16.14	16.24	16.30	16.29	1
		1	12	16.31	16.13	16.23	16.22	16.34	1
		1	24	16.34	16.10	16.07	16.11	16.22	1
		12	0	15.37	15.08	15.33	15.35	15.10	2
		12	6	15.33	15.13	15.15	15.28	15.25	2
5M	64QAM	12	13	15.34	15.21	15.28	15.24	15.36	2
		25	0	15.18	15.13	15.23	15.29	15.29	2
		1	0	15.37	15.16	15.25	15.33	15.21	2
		1	12	15.24	15.14	15.22	15.24	15.31	2
		1	24	15.34	15.09	15.17	15.12	15.29	2
		12	0	14.35	14.15	14.27	14.30	14.19	3
5M	256QAM	12	6	14.40	14.14	14.18	14.31	14.29	3
		12	13	14.36	14.16	14.21	14.32	14.34	3
		25	0	14.26	14.13	14.21	14.31	14.25	3
		1	0	12.18	12.12	12.27	12.29	12.24	5
		1	12	12.30	12.30	12.27	12.37	12.27	5
		1	24	12.29	12.24	12.20	12.25	12.34	5
5M	256QAM	12	0	12.26	12.29	12.25	12.25	12.25	5
		12	6	12.21	12.21	12.24	12.25	12.24	5
		12	13	12.25	12.35	12.22	12.29	12.23	5
		25	0	12.18	12.20	12.19	12.29	12.18	5

LTE Conducted Power (Laptop Mode Reduction)										
LTE Band 48										
BW	MCS Index	RB Size	RB Offset	Low	Mid	Mid	Mid	3GPP MPR (dB)		
		Channel		55340	55780	56210	56640			
		Frequency (MHz)		3560	3603	3647	3690			
20M	QPSK	1	0	17.78	17.73	17.77	17.79	0		
		1	50	17.73	17.69	17.74	17.74	0		
		1	99	17.71	17.70	17.77	17.70	0		
		50	0	16.80	16.75	16.78	16.83	1		
		50	25	16.73	16.66	16.66	16.75	1		
		50	50	16.68	16.62	16.58	16.69	1		
20M	16QAM	100	0	16.65	16.67	16.61	16.69	1		
		1	0	16.72	16.66	16.59	16.58	1		
		1	50	16.62	16.63	16.60	16.65	1		
		1	99	16.52	16.51	16.52	16.44	1		
		50	0	15.74	15.72	15.71	15.72	2		
		50	25	15.64	15.61	15.60	15.59	2		
20M	64QAM	50	50	15.55	15.51	15.61	15.54	2		
		100	0	15.77	15.71	15.72	15.74	2		
		1	0	15.64	15.58	15.64	15.60	2		
		1	50	15.51	15.50	15.53	15.50	2		
		1	99	15.46	15.43	15.44	15.48	2		
		50	0	14.68	14.60	14.58	14.67	3		
20M	256QAM	50	25	14.63	14.54	14.59	14.61	3		
		50	50	14.56	14.46	14.54	14.55	3		
		100	0	14.57	14.50	14.48	14.53	3		
		1	0	12.80	12.85	12.91	12.68	5		
		1	50	12.75	12.84	12.82	12.79	5		
		1	99	12.77	12.79	12.86	12.78	5		
20M	256QAM	50	0	12.79	12.76	12.87	12.78	5		
		50	25	12.86	12.82	12.88	12.73	5		
		50	50	12.74	12.81	12.74	12.78	5		
		100	0	12.82	12.76	12.73	12.69	5		
		BW	MCS Index	Channel		55315	55765	56215	56665	3GPP MPR
		Frequency (MHz)		3557.5	3602.5	3647.5	3692.5			
15M	QPSK	1	0	17.73	17.67	17.69	17.77	0		
		1	37	17.65	17.60	17.64	17.65	0		
		1	74	17.62	17.63	17.76	17.56	0		
		36	0	16.65	16.62	16.66	16.65	1		
		36	19	16.59	16.53	16.61	16.72	1		
		36	39	16.63	16.48	16.53	16.45	1		
15M	16QAM	75	0	16.53	16.62	16.61	16.63	1		
		1	0	16.58	16.65	16.51	16.45	1		
		1	37	16.57	16.50	16.45	16.56	1		
		1	74	16.39	16.38	16.39	16.43	1		
		36	0	15.60	15.67	15.61	15.71	2		
		36	19	15.59	15.60	15.58	15.55	2		
15M	64QAM	36	39	15.49	15.42	15.55	15.41	2		
		75	0	15.75	15.58	15.72	15.74	2		
		1	0	15.53	15.45	15.62	15.52	2		
		1	37	15.49	15.40	15.47	15.46	2		
		1	74	15.36	15.37	15.32	15.42	2		
		36	0	14.54	14.45	14.56	14.52	3		
15M	256QAM	36	19	14.51	14.53	14.52	14.53	3		
		36	39	14.46	14.42	14.41	14.55	3		
		75	0	14.55	14.37	14.45	14.51	3		
		1	0	12.63	12.74	12.64	12.73	5		
		1	37	12.69	12.75	12.75	12.83	5		
		1	74	12.77	12.80	12.80	12.79	5		
15M	256QAM	36	0	12.76	12.80	12.85	12.71	5		
		36	19	12.71	12.72	12.74	12.74	5		
		36	39	12.69	12.71	12.81	12.78	5		
		75	0	12.65	12.64	12.74	12.72	5		

LTE Conducted Power (Laptop Mode Reduction)										
LTE Band 48										
BW	MCS Index	Channel		55290	55750	56220	56690	3GPP MPR		
		Frequency (MHz)		3555	3601	3648	3695			
10M	QPSK	1	0	17.76	17.60	17.57	17.75	0		
		1	24	17.69	17.56	17.60	17.64	0		
		1	49	17.68	17.69	17.75	17.54	0		
		25	0	16.75	16.69	16.55	16.61	1		
		25	12	16.70	16.62	16.56	16.63	1		
		25	25	16.68	16.54	16.39	16.44	1		
10M	16QAM	50	0	16.51	16.56	16.55	16.53	1		
		1	0	16.69	16.55	16.46	16.53	1		
		1	24	16.59	16.59	16.53	16.53	1		
		1	49	16.45	16.36	16.42	16.35	1		
		25	0	15.62	15.66	15.66	15.58	2		
		25	12	15.49	15.52	15.52	15.50	2		
10M	64QAM	25	25	15.54	15.42	15.55	15.44	2		
		50	0	15.70	15.58	15.67	15.72	2		
		1	0	15.56	15.45	15.56	15.50	2		
		1	24	15.39	15.37	15.52	15.35	2		
		1	49	15.43	15.32	15.38	15.37	2		
		25	0	14.55	14.49	14.52	14.56	3		
10M	256QAM	25	12	14.51	14.42	14.49	14.46	3		
		25	25	14.55	14.46	14.40	14.46	3		
		50	0	14.51	14.44	14.42	14.52	3		
		1	0	12.80	12.82	12.91	12.84	5		
		1	24	12.69	12.75	12.77	12.76	5		
		1	49	12.73	12.74	12.76	12.79	5		
10M	256QAM	25	0	12.79	12.75	12.80	12.86	5		
		25	12	12.80	12.76	12.81	12.81	5		
		25	25	12.68	12.77	12.74	12.69	5		
		50	0	12.72	12.74	12.64	12.67	5		
		BW	MCS Index	Channel		55265	55745	56235	56715	3GPP MPR
				Frequency (MHz)		3552.5	3600.5	3649.5	3697.5	
5M	QPSK	1	0	17.77	17.69	17.67	17.77	0		
		1	12	17.71	17.65	17.60	17.68	0		
		1	24	17.72	17.66	17.73	17.59	0		
		12	0	16.68	16.69	16.74	16.71	1		
		12	6	16.64	16.54	16.66	16.67	1		
		12	13	16.64	16.59	16.49	16.56	1		
5M	16QAM	25	0	16.55	16.65	16.51	16.58	1		
		1	0	16.63	16.60	16.47	16.45	1		
		1	12	16.58	16.52	16.51	16.51	1		
		1	24	16.40	16.42	16.46	16.29	1		
		12	0	15.66	15.64	15.59	15.68	2		
		12	6	15.57	15.53	15.52	15.54	2		
5M	64QAM	12	13	15.53	15.43	15.52	15.39	2		
		25	0	15.63	15.57	15.65	15.73	2		
		1	0	15.62	15.55	15.57	15.56	2		
		1	12	15.38	15.49	15.53	15.46	2		
		1	24	15.45	15.34	15.34	15.44	2		
		12	0	14.55	14.52	14.46	14.56	3		
5M	256QAM	12	6	14.55	14.44	14.47	14.51	3		
		12	13	14.48	14.38	14.54	14.47	3		
		25	0	14.53	14.36	14.41	14.38	3		
		1	0	12.75	12.80	12.86	12.79	5		
		1	12	12.69	12.83	12.75	12.81	5		
		1	24	12.74	12.78	12.86	12.77	5		
5M	256QAM	12	0	12.76	12.74	12.82	12.73	5		
		12	6	12.77	12.75	12.83	12.74	5		
		12	13	12.69	12.72	12.66	12.79	5		
		25	0	12.73	12.69	12.73	12.69	5		

LTE Conducted Power (Laptop Mode Reduction)									
LTE Band 66									
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)		
		Channel		132072	132322	132572			
		Frequency (MHz)		1720	1745	1770			
20M	QPSK	1	0	16.07	16.27	16.25	0		
		1	50	16.02	16.21	16.20	0		
		1	99	15.96	16.16	16.14	0		
		50	0	15.10	15.14	15.06	1		
		50	25	14.83	15.03	15.01	1		
		50	50	14.76	14.96	14.94	1		
20M	16QAM	100	0	15.04	15.08	15.07	1		
		1	0	14.84	14.89	15.02	1		
		1	50	14.76	14.81	14.94	1		
		1	99	14.70	14.75	14.88	1		
		50	0	13.96	14.01	14.14	2		
		50	25	13.88	13.93	14.06	2		
20M	64QAM	50	50	13.78	13.83	13.96	2		
		100	0	13.73	13.78	13.91	2		
		1	0	13.93	13.98	14.11	2		
		1	50	13.87	13.92	14.05	2		
		1	99	13.82	13.87	14.00	2		
		50	0	12.99	13.04	13.17	3		
20M	256QAM	50	25	12.93	12.98	13.11	3		
		50	50	12.88	12.93	13.06	3		
		100	0	12.83	12.88	13.01	3		
		1	0	11.33	11.36	11.36	5		
		1	50	11.25	11.37	11.38	5		
		1	99	11.21	11.36	11.28	5		
20M	256QAM	50	0	11.29	11.25	11.31	5		
		50	25	11.27	11.36	11.37	5		
		50	50	11.14	11.29	11.23	5		
		100	0	11.25	11.29	11.26	5		
		BW	MCS Index	Channel		132047	132322	132597	3GPP MPR
		Frequency (MHz)		1717.5	1745	1772.5			
15M	QPSK	1	0	15.99	15.98	16.04	0		
		1	37	15.87	15.91	15.97	0		
		1	74	15.87	15.87	16.05	0		
		36	0	15.08	14.95	14.85	1		
		36	19	14.73	14.67	14.89	1		
		36	39	14.61	14.61	14.71	1		
15M	16QAM	75	0	14.93	14.90	14.98	1		
		1	0	14.71	14.83	14.86	1		
		1	37	14.59	14.65	14.78	1		
		1	74	14.60	14.59	14.73	1		
		36	0	13.87	13.88	14.11	2		
		36	19	13.76	13.78	13.91	2		
15M	64QAM	36	39	13.78	13.67	13.78	2		
		75	0	13.54	13.56	13.87	2		
		1	0	13.80	13.87	13.99	2		
		1	37	13.79	13.70	14.03	2		
		1	74	13.65	13.87	13.94	2		
		36	0	12.81	12.85	13.02	3		
15M	256QAM	36	19	12.75	12.86	13.04	3		
		36	39	12.75	12.86	12.98	3		
		75	0	12.76	12.76	12.85	3		
		1	0	11.17	11.22	11.20	5		
		1	37	11.34	11.35	11.32	5		
		1	74	11.17	11.26	11.30	5		
15M	256QAM	36	0	11.18	11.29	11.20	5		
		36	19	11.19	11.22	11.26	5		
		36	39	11.26	11.32	11.24	5		
		75	0	11.25	11.22	11.22	5		

LTE Conducted Power (Laptop Mode Reduction)							
LTE Band 66							
BW	MCS Index	Channel		132022	132322	132622	3GPP MPR
		Frequency (MHz)		1715	1745	1775	
10M	QPSK	1	0	15.94	16.00	16.10	0
		1	24	15.88	15.97	16.08	0
		1	49	15.77	15.81	15.97	0
		25	0	14.90	14.97	14.95	1
		25	12	14.75	14.72	15.00	1
		25	25	14.61	14.75	14.85	1
		50	0	15.00	14.86	14.94	1
10M	16QAM	1	0	14.69	14.73	14.94	1
		1	24	14.69	14.70	14.84	1
		1	49	14.55	14.67	14.78	1
		25	0	13.74	13.94	13.92	2
		25	12	13.72	13.85	13.98	2
		25	25	13.63	13.77	13.91	2
		50	0	13.60	13.63	13.80	2
10M	64QAM	1	0	13.85	13.92	13.90	2
		1	24	13.65	13.77	13.90	2
		1	49	13.75	13.80	13.87	2
		25	0	12.81	12.88	13.11	3
		25	12	12.72	12.89	12.97	3
		25	25	12.72	12.87	12.88	3
		50	0	12.67	12.72	12.88	3
10M	256QAM	1	0	11.18	11.22	11.13	5
		1	24	11.20	11.30	11.31	5
		1	49	11.26	11.36	11.32	5
		25	0	11.27	11.27	11.26	5
		25	12	11.28	11.25	11.30	5
		25	25	11.21	11.24	11.37	5
		50	0	11.14	11.16	11.21	5
BW	MCS Index	Channel		131997	132322	132647	3GPP MPR
		Frequency (MHz)		1712.5	1745	1777.5	
5M	QPSK	1	0	15.97	15.94	16.10	0
		1	12	15.92	15.94	16.02	0
		1	24	15.90	16.01	16.09	0
		12	0	14.99	14.96	15.06	1
		12	6	14.61	14.78	14.97	1
		12	13	14.53	14.69	14.70	1
		25	0	14.82	14.86	14.95	1
5M	16QAM	1	0	14.68	14.69	14.85	1
		1	12	14.73	14.60	14.82	1
		1	24	14.60	14.66	14.82	1
		12	0	13.79	13.91	14.10	2
		12	6	13.72	13.86	13.92	2
		12	13	13.74	13.73	13.76	2
		25	0	13.70	13.61	13.81	2
5M	64QAM	1	0	13.84	13.85	13.99	2
		1	12	13.70	13.91	13.82	2
		1	24	13.71	13.70	13.86	2
		12	0	12.85	12.82	13.07	3
		12	6	12.80	12.87	13.00	3
		12	13	12.83	12.76	12.90	3
		25	0	12.76	12.72	12.83	3
5M	256QAM	1	0	11.23	11.32	11.34	5
		1	12	11.21	11.34	11.30	5
		1	24	11.12	11.36	11.25	5
		12	0	11.28	11.18	11.23	5
		12	6	11.25	11.30	11.37	5
		12	13	11.04	11.22	11.22	5
		25	0	11.25	11.21	11.19	5

LTE Conducted Power (Laptop Mode Reduction)									
LTE Band 66									
BW	MCS Index	Channel		131987	132322	132657	3GPP MPR		
		Frequency (MHz)		1711.5	1745	1778.5			
3M	QPSK	1	0	15.85	15.90	16.07	0		
		1	7	15.93	15.86	16.11	0		
		1	14	15.81	15.82	16.01	0		
		8	0	15.00	14.99	14.93	1		
		8	3	14.71	14.71	14.87	1		
		8	7	14.65	14.73	14.72	1		
3M	16QAM	15	0	14.83	14.86	14.96	1		
		1	0	14.75	14.69	14.83	1		
		1	7	14.76	14.62	14.78	1		
		1	14	14.57	14.71	14.77	1		
		8	0	13.81	13.97	13.99	2		
		8	3	13.66	13.80	13.92	2		
3M	64QAM	8	7	13.65	13.70	13.83	2		
		15	0	13.72	13.63	13.86	2		
		1	0	13.78	13.76	14.01	2		
		1	7	13.72	13.72	13.95	2		
		1	14	13.82	13.63	13.79	2		
		8	0	12.91	12.83	12.99	3		
3M	256QAM	8	3	12.73	12.81	12.98	3		
		8	7	12.72	12.76	12.95	3		
		15	0	12.68	12.85	12.85	3		
		1	0	11.26	11.30	11.36	5		
		1	7	11.17	11.28	11.33	5		
		1	14	11.13	11.34	11.19	5		
3M	256QAM	8	0	11.25	11.22	11.25	5		
		8	3	11.23	11.34	11.28	5		
		8	7	11.10	11.26	11.13	5		
		15	0	11.20	11.27	11.21	5		
		BW	MCS Index	Channel		131979	132322	132665	3GPP MPR
		Frequency (MHz)		1710.7	1745	1779.3			
1.4M	QPSK	1	0	16.01	16.01	16.04	0		
		1	2	15.83	15.96	15.97	0		
		1	5	15.83	15.88	16.06	0		
		3	0	15.01	14.89	14.99	0		
		3	1	14.72	14.79	14.82	0		
		3	3	14.53	14.69	14.73	0		
1.4M	16QAM	6	0	14.97	14.85	14.90	1		
		1	0	14.64	14.73	14.85	1		
		1	2	14.57	14.80	14.79	1		
		1	5	14.63	14.59	14.79	1		
		3	0	13.75	13.77	14.04	1		
		3	1	13.83	13.85	14.04	1		
1.4M	64QAM	3	3	13.66	13.83	13.86	1		
		6	0	13.53	13.57	13.74	2		
		1	0	13.83	13.91	14.00	2		
		1	2	13.76	13.70	13.86	2		
		1	5	13.76	13.80	13.86	2		
		3	0	12.86	12.95	13.06	2		
1.4M	256QAM	3	1	12.81	12.94	12.94	2		
		3	3	12.69	12.79	13.03	2		
		6	0	12.69	12.78	12.87	3		
		1	0	11.25	11.27	11.32	5		
		1	2	11.16	11.27	11.38	5		
		1	5	11.17	11.31	11.27	5		
1.4M	256QAM	3	0	11.20	11.18	11.23	5		
		3	1	11.18	11.30	11.36	5		
		3	3	11.07	11.28	11.15	5		
		6	0	11.24	11.26	11.19	5		

LTE Conducted Power (Laptop Mode Reduction)							
LTE Band 71							
BW	MCS Index	RB Size	RB Offset	Low	Mid	Mid	3GPP MPR (dB)
		Channel		133222	133297	133372	
		Frequency (MHz)		673	680.5	688	
20M	QPSK	1	0	18.98	18.89	18.90	0
		1	50	18.92	18.83	18.83	0
		1	99	18.86	18.77	18.77	0
		50	0	17.95	17.88	17.93	1
		50	25	17.86	17.77	17.78	1
		50	50	17.81	17.72	17.73	1
		100	0	17.91	17.86	17.90	1
20M	16QAM	1	0	17.88	17.79	17.80	1
		1	50	17.83	17.74	17.75	1
		1	99	17.75	17.66	17.67	1
		50	0	16.94	16.85	16.86	2
		50	25	16.87	16.78	16.79	2
		50	50	16.82	16.73	16.74	2
		100	0	16.75	16.66	16.67	2
20M	64QAM	1	0	16.90	16.81	16.82	2
		1	50	16.84	16.75	16.76	2
		1	99	16.78	16.69	16.70	2
		50	0	15.94	15.85	15.86	3
		50	25	15.89	15.80	15.81	3
		50	50	15.83	15.74	15.75	3
		100	0	15.77	15.68	15.69	3
20M	256QAM	1	0	14.28	14.44	14.39	5
		1	50	14.28	14.31	14.30	5
		1	99	14.19	14.32	14.30	5
		50	0	14.19	14.24	14.35	5
		50	25	14.34	14.34	14.32	5
		50	50	14.24	14.22	14.26	5
		100	0	14.29	14.34	14.26	5
BW	MCS Index	Channel		133197	133297	133397	3GPP MPR
		Frequency (MHz)		670.5	680.5	690.5	
15M	QPSK	1	0	18.81	18.85	18.74	0
		1	37	18.71	18.63	18.78	0
		1	74	18.80	18.65	18.71	0
		36	0	17.82	17.65	17.84	1
		36	19	17.64	17.61	17.62	1
		36	39	17.63	17.63	17.65	1
		75	0	17.63	17.74	17.81	1
15M	16QAM	1	0	17.73	17.56	17.60	1
		1	37	17.75	17.54	17.51	1
		1	74	17.59	17.42	17.52	1
		36	0	16.85	16.70	16.77	2
		36	19	16.77	16.67	16.62	2
		36	39	16.75	16.59	16.63	2
		75	0	16.70	16.60	16.54	2
15M	64QAM	1	0	16.82	16.58	16.71	2
		1	37	16.77	16.69	16.66	2
		1	74	16.60	16.49	16.56	2
		36	0	15.82	15.60	15.69	3
		36	19	15.75	15.75	15.78	3
		36	39	15.70	15.60	15.70	3
		75	0	15.58	15.53	15.59	3
15M	256QAM	1	0	14.25	14.22	14.28	5
		1	37	14.29	14.32	14.27	5
		1	74	14.21	14.25	14.31	5
		36	0	14.19	14.19	14.21	5
		36	19	14.21	14.22	14.19	5
		36	39	14.23	14.29	14.29	5
		75	0	14.19	14.30	14.12	5

LTE Conducted Power (Laptop Mode Reduction)									
LTE Band 71									
BW	MCS Index	Channel		133172	133297	133422	3GPP MPR		
		Frequency (MHz)		668	680.5	693			
10M	QPSK	1	0	18.78	18.77	18.79	0		
		1	24	18.76	18.64	18.66	0		
		1	49	18.77	18.71	18.60	0		
		25	0	17.82	17.65	17.85	1		
		25	12	17.75	17.58	17.67	1		
		25	25	17.67	17.69	17.61	1		
10M	16QAM	50	0	17.53	17.65	17.73	1		
		1	0	17.74	17.70	17.67	1		
		1	24	17.73	17.56	17.74	1		
		1	49	17.64	17.54	17.45	1		
		25	0	16.75	16.74	16.68	2		
		25	12	16.77	16.68	16.69	2		
10M	64QAM	25	25	16.72	16.49	16.50	2		
		50	0	16.54	16.59	16.58	2		
		1	0	16.76	16.60	16.65	2		
		1	24	16.61	16.70	16.62	2		
		1	49	16.74	16.61	16.56	2		
		25	0	15.77	15.66	15.77	3		
10M	256QAM	25	12	15.85	15.70	15.74	3		
		25	25	15.72	15.63	15.56	3		
		50	0	15.57	15.54	15.59	3		
		1	0	14.18	14.19	14.17	5		
		1	24	14.25	14.32	14.26	5		
		1	49	14.25	14.27	14.24	5		
10M	256QAM	25	0	14.23	14.26	14.36	5		
		25	12	14.22	14.28	14.21	5		
		25	25	14.15	14.31	14.31	5		
		50	0	14.15	14.16	14.15	5		
		BW	MCS Index	Channel		133147	133297	133447	3GPP MPR
				Frequency (MHz)		665.5	680.5	695.5	
5M	QPSK	1	0	18.75	18.78	18.81	0		
		1	12	18.90	18.71	18.67	0		
		1	24	18.69	18.62	18.61	0		
		12	0	17.87	17.72	17.72	1		
		12	6	17.72	17.67	17.72	1		
		12	13	17.80	17.52	17.66	1		
5M	16QAM	25	0	17.56	17.73	17.77	1		
		1	0	17.68	17.63	17.68	1		
		1	12	17.78	17.66	17.62	1		
		1	24	17.64	17.48	17.56	1		
		12	0	16.72	16.64	16.83	2		
		12	6	16.82	16.60	16.68	2		
5M	64QAM	12	13	16.76	16.52	16.66	2		
		25	0	16.54	16.60	16.66	2		
		1	0	16.80	16.70	16.63	2		
		1	12	16.71	16.66	16.73	2		
		1	24	16.70	16.62	16.52	2		
		12	0	15.78	15.75	15.61	3		
5M	256QAM	12	6	15.74	15.60	15.66	3		
		12	13	15.66	15.70	15.64	3		
		25	0	15.66	15.48	15.61	3		
		1	0	14.23	14.43	14.34	5		
		1	12	14.26	14.31	14.30	5		
		1	24	14.13	14.31	14.26	5		
5M	256QAM	12	0	14.18	14.17	14.29	5		
		12	6	14.25	14.27	14.29	5		
		12	13	14.20	14.22	14.18	5		
		25	0	14.19	14.28	14.17	5		

NR Conducted Power (Laptop Mode Reduction)

NR Band 2_SA

BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		372000	376000	380000	
		Frequency (MHz)		1860	1880	1900	
20M	DFT-S PI/2 BPSK	1	1	15.81	15.84	15.82	0
20M	DFT-S QPSK	1	1	15.87	15.98	15.94	0
		1	53	15.82	15.93	15.89	0
		1	104	15.76	15.87	15.83	0
		50	0	14.81	14.97	15.00	1
		50	28	15.44	15.50	15.49	0
		50	56	14.73	14.84	14.80	1
		100	0	14.94	14.90	14.87	1
20M	DFT-S 16QAM	1	1	14.78	14.89	14.85	1
20M	DFT-S 64QAM	1	1	13.22	13.33	13.29	2.5
20M	DFT-S 256QAM	1	1	11.26	11.37	11.33	4.5
20M	CP QPSK	1	1	14.15	14.26	14.22	1.5
BW	MCS Index	Channel		371500	376000	380500	3GPP MPR
		Frequency (MHz)		1857.5	1880	1902.5	
15M	DFT-S PI/2 BPSK	1	1	15.80	15.74	15.74	0
15M	DFT-S QPSK	1	1	15.82	15.95	15.84	0
		1	40	15.81	15.87	15.80	0
		1	77	15.76	15.83	15.83	0
		36	0	14.75	14.97	14.92	1
		36	22	15.40	15.40	15.42	0
		36	43	14.68	14.80	14.80	1
		75	0	14.85	14.90	14.83	1
15M	DFT-S 16QAM	1	1	14.78	14.84	14.78	1
15M	DFT-S 64QAM	1	1	13.18	13.29	13.21	2.5
15M	DFT-S 256QAM	1	1	11.24	11.28	11.24	4.5
15M	CP QPSK	1	1	14.06	14.20	14.22	1.5

NR Conducted Power (Laptop Mode Reduction)

NR Band 2_SA

BW	MCS Index	Channel		371000	376000	381000	3GPP MPR
		Frequency (MHz)		1855	1880	1905	
10M	DFT-S PI/2 BPSK	1	1	15.77	15.83	15.75	0
10M	DFT-S QPSK	1	1	15.85	15.88	15.94	0
		1	26	15.77	15.86	15.83	0
		1	50	15.73	15.86	15.76	0
		25	0	14.81	14.92	14.97	1
		25	14	15.47	15.36	15.43	0
		25	27	14.72	14.75	14.72	1
		50	0	14.88	14.80	14.86	1
10M	DFT-S 16QAM	1	1	14.74	14.89	14.81	1
10M	DFT-S 64QAM	1	1	13.13	13.25	13.28	2.5
10M	DFT-S 256QAM	1	1	11.18	11.31	11.28	4.5
10M	CP QPSK	1	1	14.10	14.26	14.21	1.5
BW	MCS Index	Channel		370500	376000	381500	3GPP MPR
		Frequency (MHz)		1852.5	1880	1907.5	
5M	DFT-S PI/2 BPSK	1	1	15.78	15.75	15.80	0
5M	DFT-S QPSK	1	1	15.83	15.93	15.91	0
		1	13	15.78	15.91	15.81	0
		1	23	15.75	15.81	15.75	0
		12	0	14.72	14.88	14.95	1
		12	7	15.48	15.41	15.39	0
		12	13	14.72	14.75	14.76	1
		25	0	14.85	14.88	14.80	1
5M	DFT-S 16QAM	1	1	14.77	14.82	14.77	1
5M	DFT-S 64QAM	1	1	13.17	13.27	13.29	2.5
5M	DFT-S 256QAM	1	1	11.23	11.36	11.24	4.5
5M	CP QPSK	1	1	14.12	14.19	14.17	1.5

NR Conducted Power (Laptop Mode Reduction)

NR Band 5_SA

BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		166800	167300	167800	
		Frequency (MHz)		834	836.5	839	
20M	DFT-S PI/2 BPSK	1	1	19.19	19.19	19.17	0
20M	DFT-S QPSK	1	1	19.22	19.25	19.23	0
		1	53	19.14	19.18	19.16	0
		1	104	19.08	19.14	19.11	0
		50	0	17.76	17.95	17.83	1
		50	28	18.67	18.74	18.65	0
		50	56	17.37	17.65	17.51	1
		100	0	17.74	17.84	17.79	1
20M	DFT-S 16QAM	1	1	17.33	17.61	17.47	1
20M	DFT-S 64QAM	1	1	15.69	15.97	15.83	2.5
20M	DFT-S 256QAM	1	1	13.67	13.95	13.81	4.5
20M	CP QPSK	1	1	16.62	16.90	16.76	1.5
BW	MCS Index	Channel		166300	167300	168300	3GPP MPR
		Frequency (MHz)		831.5	836.5	841.5	
15M	DFT-S PI/2 BPSK	1	1	19.14	19.18	19.08	0
15M	DFT-S QPSK	1	1	19.21	19.23	19.16	0
		1	40	19.04	19.11	19.08	0
		1	77	19.03	19.09	19.11	0
		36	0	17.76	17.95	17.77	1
		36	22	18.61	18.68	18.64	0
		36	43	17.29	17.60	17.50	1
		75	0	17.72	17.79	17.78	1
15M	DFT-S 16QAM	1	1	17.30	17.51	17.39	1
15M	DFT-S 64QAM	1	1	15.68	15.93	15.79	2.5
15M	DFT-S 256QAM	1	1	13.67	13.91	13.75	4.5
15M	CP QPSK	1	1	16.62	16.82	16.74	1.5

NR Conducted Power (Laptop Mode Reduction)

NR Band 5_SA

BW	MCS Index	Channel		165800	167300	168800	3GPP MPR
		Frequency (MHz)		829	836.5	844	
10M	DFT-S PI/2 BPSK	1	1	19.16	19.13	19.10	0
10M	DFT-S QPSK	1	1	19.13	19.18	19.22	0
		1	26	19.05	19.16	19.10	0
		1	50	19.02	19.12	19.10	0
		25	0	17.68	17.85	17.73	1
		25	14	18.61	18.73	18.62	0
		25	27	17.36	17.61	17.51	1
		50	0	17.71	17.76	17.71	1
10M	DFT-S 16QAM	1	1	17.24	17.61	17.41	1
10M	DFT-S 64QAM	1	1	15.66	15.97	15.78	2.5
10M	DFT-S 256QAM	1	1	13.63	13.85	13.74	4.5
10M	CP QPSK	1	1	16.60	16.90	16.74	1.5
BW	MCS Index	Channel		165300	167300	169300	3GPP MPR
		Frequency (MHz)		826.5	836.5	846.5	
5M	DFT-S PI/2 BPSK	1	1	19.17	19.15	19.13	0
5M	DFT-S QPSK	1	1	19.17	19.22	19.23	0
		1	13	19.05	19.15	19.14	0
		1	23	19.03	19.04	19.04	0
		12	0	17.73	17.87	17.81	1
		12	7	18.66	18.67	18.59	0
		12	13	17.29	17.59	17.49	1
		25	0	17.69	17.74	17.71	1
5M	DFT-S 16QAM	1	1	17.28	17.60	17.46	1
5M	DFT-S 64QAM	1	1	15.69	15.91	15.74	2.5
5M	DFT-S 256QAM	1	1	13.64	13.95	13.79	4.5
5M	CP QPSK	1	1	16.53	16.86	16.73	1.5

NR Conducted Power (Laptop Mode Reduction)

NR Band 7_SA

BW	MCS Index	Channel		502000	507000	512000	3GPP MPR
		Frequency (MHz)		2510	2535	2560	
20M	DFT-S PI/2 BPSK	1	1	17.19	17.33	17.32	0
20M	DFT-S QPSK	1	1	17.33	17.48	17.44	0
		1	53	17.28	17.43	17.39	0
		1	104	17.23	17.38	17.34	0
		50	0	16.41	16.47	16.44	1
		50	28	16.78	16.93	16.89	0
		50	56	16.26	16.41	16.37	1
		100	0	16.40	16.45	16.42	1
20M	DFT-S 16QAM	1	1	16.24	16.39	16.35	1
20M	DFT-S 64QAM	1	1	14.75	14.90	14.86	2.5
20M	DFT-S 256QAM	1	1	12.74	12.89	12.85	4.5
20M	CP QPSK	1	1	15.73	15.88	15.84	1.5
BW	MCS Index	Channel		501500	507000	512500	3GPP MPR
		Frequency (MHz)		2507.5	2535	2562.5	
15M	DFT-S PI/2 BPSK	1	1	17.19	17.33	17.26	0
15M	DFT-S QPSK	1	1	17.32	17.40	17.36	0
		1	40	17.25	17.36	17.36	0
		1	77	17.22	17.34	17.25	0
		36	0	16.32	16.38	16.44	1
		36	22	16.74	16.90	16.83	0
		36	43	16.18	16.36	16.30	1
		75	0	16.35	16.44	16.36	1
15M	DFT-S 16QAM	1	1	16.22	16.32	16.30	1
15M	DFT-S 64QAM	1	1	14.75	14.82	14.81	2.5
15M	DFT-S 256QAM	1	1	12.67	12.80	12.77	4.5
15M	CP QPSK	1	1	15.65	15.81	15.77	1.5

NR Conducted Power (Laptop Mode Reduction)

NR Band 7_SA

BW	MCS Index	Channel		501000	507000	513000	3GPP MPR
		Frequency (MHz)		2505	2535	2565	
10M	DFT-S PI/2 BPSK	1	1	17.11	17.28	17.24	0
10M	DFT-S QPSK	1	1	17.33	17.42	17.38	0
		1	26	17.28	17.36	17.36	0
		1	50	17.23	17.35	17.31	0
		25	0	16.36	16.38	16.35	1
		25	14	16.68	16.83	16.88	0
		25	27	16.26	16.33	16.30	1
		50	0	16.40	16.40	16.39	1
10M	DFT-S 16QAM	1	1	16.14	16.35	16.30	1
10M	DFT-S 64QAM	1	1	14.71	14.85	14.76	2.5
10M	DFT-S 256QAM	1	1	12.66	12.82	12.83	4.5
10M	CP QPSK	1	1	15.73	15.83	15.76	1.5
BW	MCS Index	Channel		500500	507000	513500	3GPP MPR
		Frequency (MHz)		2502.5	2535	2567.5	
5M	DFT-S PI/2 BPSK	1	1	17.15	17.28	17.23	0
5M	DFT-S QPSK	1	1	17.33	17.39	17.41	0
		1	13	17.20	17.38	17.39	0
		1	23	17.17	17.35	17.33	0
		12	0	16.33	16.45	16.42	1
		12	7	16.69	16.91	16.84	0
		12	13	16.21	16.41	16.31	1
		25	0	16.40	16.35	16.39	1
5M	DFT-S 16QAM	1	1	16.18	16.38	16.34	1
5M	DFT-S 64QAM	1	1	14.72	14.85	14.79	2.5
5M	DFT-S 256QAM	1	1	12.66	12.81	12.80	4.5
5M	CP QPSK	1	1	15.72	15.85	15.82	1.5

NR Conducted Power (Laptop Mode Reduction)

NR Band 25_SA

BW	MCS Index	Channel		372000	376500	381000	3GPP MPR
		Frequency (MHz)		1860	1882.5	1905	
20M	DFT-S PI/2 BPSK	1	1	17.13	17.25	17.15	0
20M	DFT-S QPSK	1	1	17.41	17.44	17.42	0
		1	53	17.21	17.29	17.22	0
		1	104	17.13	17.21	17.15	0
		50	0	16.27	16.31	16.28	1
		50	28	17.10	17.20	17.16	0
		50	56	16.21	16.29	16.25	1
		100	0	16.19	16.24	16.22	1
20M	DFT-S 16QAM	1	1	16.16	16.23	16.18	1
20M	DFT-S 64QAM	1	1	14.61	14.77	14.69	2.5
20M	DFT-S 256QAM	1	1	12.65	12.79	12.71	4.5
20M	CP QPSK	1	1	15.62	15.75	15.67	1.5

NR Conducted Power (Laptop Mode Reduction)

NR Band 25_SA

BW	MCS Index	Channel		371500	376500	381500	3GPP MPR
		Frequency (MHz)		1857.5	1882.5	1907.5	
15M	DFT-S PI/2 BPSK	1	1	17.09	17.19	17.05	0
15M	DFT-S QPSK	1	1	17.16	17.28	17.21	0
		1	40	17.11	17.25	17.21	0
		1	77	17.10	17.18	17.15	0
		36	0	16.19	16.22	16.22	1
		36	22	17.07	17.15	17.11	0
		36	43	16.13	16.26	16.18	1
		75	0	16.10	16.17	16.16	1
15M	DFT-S 16QAM	1	1	16.14	16.23	16.15	1
15M	DFT-S 64QAM	1	1	14.59	14.72	14.63	2.5
15M	DFT-S 256QAM	1	1	12.56	12.79	12.70	4.5
15M	CP QPSK	1	1	15.60	15.75	15.60	1.5
BW	MCS Index	Channel		371000	376500	382000	3GPP MPR
		Frequency (MHz)		1855	1882.5	1910	
10M	DFT-S PI/2 BPSK	1	1	17.10	17.21	17.15	0
10M	DFT-S QPSK	1	1	17.15	17.24	17.22	0
		1	26	17.12	17.23	17.21	0
		1	50	17.03	17.17	17.15	0
		25	0	16.21	16.27	16.27	1
		25	14	17.02	17.17	17.11	0
		25	27	16.14	16.24	16.15	1
		50	0	16.14	16.18	16.19	1
10M	DFT-S 16QAM	1	1	16.10	16.17	16.08	1
10M	DFT-S 64QAM	1	1	14.59	14.67	14.61	2.5
10M	DFT-S 256QAM	1	1	12.57	12.70	12.68	4.5
10M	CP QPSK	1	1	15.59	15.69	15.61	1.5

NR Conducted Power (Laptop Mode Reduction)

NR Band 25_SA

BW	MCS Index	Channel		370500	376500	382500	3GPP MPR
		Frequency (MHz)		1852.5	1882.5	1912.5	
5M	DFT-S PI/2 BPSK	1	1	17.09	17.21	17.12	0
5M	DFT-S QPSK	1	1	17.23	17.32	17.20	0
		1	13	17.21	17.25	17.12	0
		1	23	17.04	17.18	17.06	0
		12	0	16.18	16.29	16.27	1
		12	7	17.04	17.17	17.10	0
		12	13	16.12	16.25	16.22	1
		25	0	16.19	16.24	16.21	1
5M	DFT-S 16QAM	1	1	16.11	16.15	16.11	1
5M	DFT-S 64QAM	1	1	14.60	14.68	14.61	2.5
5M	DFT-S 256QAM	1	1	12.62	12.70	12.63	4.5
5M	CP QPSK	1	1	15.53	15.73	15.66	1.5

NR Conducted Power (Laptop Mode Reduction)

NR Band 30_SA

BW	MCS Index	RB Size	RB Offset	Channel		Mid	3GPP MPR (dB)
		Channel		462000			
		Frequency (MHz)		2310			
10M	DFT-S PI/2 BPSK	1	1		16.46		0
10M	DFT-S QPSK	1	1		16.48		0
		1	26		16.43		0
		1	50		16.35		0
		25	0		15.49		1
		25	14		16.11		0
		25	27		15.42		1
		50	0		15.48		1
10M	DFT-S 16QAM	1	1		15.33		1
10M	DFT-S 64QAM	1	1		13.85		2.5
10M	DFT-S 256QAM	1	1		11.81		4.5
10M	CP QPSK	1	1		14.94		1.5
BW	MCS Index	Channel		461500	462000	462500	3GPP MPR
		Frequency (MHz)		2307.5	2310	2312.5	
5M	DFT-S PI/2 BPSK	1	1	16.30	16.43	16.37	0
5M	DFT-S QPSK	1	1	16.33	16.46	16.38	0
		1	13	16.41	16.36	16.42	0
		1	23	16.26	16.30	16.31	0
		12	0	15.39	15.43	15.41	1
		12	7	16.03	16.06	16.03	0
		12	13	15.26	15.33	15.34	1
		25	0	15.39	15.41	15.46	1
5M	DFT-S 16QAM	1	1	15.30	15.28	15.31	1
5M	DFT-S 64QAM	1	1	13.72	13.85	13.82	2.5
5M	DFT-S 256QAM	1	1	11.74	11.73	11.80	4.5
5M	CP QPSK	1	1	14.78	14.89	14.86	1.5

NR Conducted Power (Laptop Mode Reduction)

NR Band 66_SA

BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		346000	349000	352000	
		Frequency (MHz)		1730	1745	1760	
40M	DFT-S PI/2 BPSK	1	1	14.75	14.78	14.74	0
40M	DFT-S QPSK	1	1	14.78	14.82	14.80	0
		1	108	14.74	14.77	14.74	0
		1	214	14.70	14.72	14.69	0
		108	0	13.58	13.69	13.64	1
		108	54	14.52	14.58	14.54	0
		108	108	13.57	13.64	13.60	1
		216	0	13.62	13.66	13.60	1
40M	DFT-S 16QAM	1	1	13.67	13.74	13.67	1
40M	DFT-S 64QAM	1	1	11.76	11.83	11.76	2.5
40M	DFT-S 256QAM	1	1	9.95	10.02	9.95	4.5
40M	CP QPSK	1	1	12.87	12.94	12.87	1.5

NR Conducted Power (Laptop Mode Reduction)

NR Band 66_SA

BW	MCS Index	Channel		344000	349000	354000	3GPP MPR
		Frequency (MHz)		1720	1745	1770	
20M	DFT-S PI/2 BPSK	1	1	14.73	14.72	14.71	0
20M	DFT-S QPSK	1	1	14.77	14.78	14.79	0
		1	53	14.75	14.72	14.65	0
		1	104	14.63	14.69	14.68	0
		50	0	13.59	13.54	13.58	1
		50	28	13.97	13.92	13.91	0
		50	56	13.64	13.55	13.54	1
		100	0	13.58	13.56	13.55	1
20M	DFT-S 16QAM	1	1	13.74	13.66	13.61	1
20M	DFT-S 64QAM	1	1	11.73	11.74	11.72	2.5
20M	DFT-S 256QAM	1	1	9.98	9.91	9.86	4.5
20M	CP QPSK	1	1	12.87	12.78	12.77	1.5

NR Conducted Power (Laptop Mode Reduction)

NR Band 66_SA

BW	MCS Index	Channel		343500	349000	354500	3GPP MPR
		Frequency (MHz)		1717.5	1745	1772.5	
15M	DFT-S PI/2 BPSK	1	1	14.75	14.66	14.66	0
15M	DFT-S QPSK	1	1	14.79	14.75	14.71	0
		1	40	14.75	14.65	14.73	0
		1	77	14.62	14.62	14.67	0
		36	0	13.61	13.49	13.56	1
		36	22	13.98	13.89	13.93	0
		36	43	13.56	13.53	13.59	1
		75	0	13.61	13.59	13.51	1
15M	DFT-S 16QAM	1	1	13.72	13.61	13.59	1
15M	DFT-S 64QAM	1	1	11.75	11.72	11.76	2.5
15M	DFT-S 256QAM	1	1	10.02	9.87	9.91	4.5
15M	CP QPSK	1	1	12.90	12.87	12.78	1.5
BW	MCS Index	Channel		343000	349000	355000	3GPP MPR
		Frequency (MHz)		1715	1745	1775	
10M	DFT-S PI/2 BPSK	1	1	14.74	14.67	14.68	0
10M	DFT-S QPSK	1	1	14.77	14.68	14.77	0
		1	26	14.68	14.71	14.70	0
		1	50	14.72	14.62	14.63	0
		25	0	13.63	13.56	13.56	1
		25	14	14.01	13.97	13.91	0
		25	27	13.56	13.54	13.57	1
		50	0	13.63	13.55	13.50	1
10M	DFT-S 16QAM	1	1	13.74	13.63	13.63	1
10M	DFT-S 64QAM	1	1	11.79	11.72	11.70	2.5
10M	DFT-S 256QAM	1	1	9.96	9.89	9.93	4.5
10M	CP QPSK	1	1	12.92	12.86	12.79	1.5

NR Conducted Power (Laptop Mode Reduction)

NR Band 66_SA

BW	MCS Index	Channel		342500	349000	355500	3GPP MPR
		Frequency (MHz)		1712.5	1745	1777.5	
5M	DFT-S PI/2 BPSK	1	1	14.71	14.68	14.64	0
5M	DFT-S QPSK	1	1	14.77	14.73	14.78	0
		1	13	14.72	14.69	14.71	0
		1	23	14.67	14.61	14.64	0
		12	0	13.61	13.51	13.54	1
		12	7	14.02	13.97	13.94	0
		12	13	13.63	13.50	13.50	1
		25	0	13.63	13.56	13.56	1
5M	DFT-S 16QAM	1	1	13.73	13.58	13.59	1
5M	DFT-S 64QAM	1	1	11.80	11.66	11.67	2.5
5M	DFT-S 256QAM	1	1	10.01	9.86	9.89	4.5
5M	CP QPSK	1	1	12.85	12.80	12.80	1.5

NR Conducted Power (Laptop Mode Reduction)

NR Band 71_SA

BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		134600	136100	137600	
		Frequency (MHz)		673	680.5	688	
20M	DFT-S PI/2 BPSK	1	1	22.88	22.92	22.91	0
20M	DFT-S QPSK	1	1	22.93	22.98	22.94	0
		1	53	22.90	22.93	22.91	0
		1	104	22.87	22.88	22.89	0
		50	0	21.95	21.98	21.94	1
		50	28	22.43	22.52	22.47	0
		50	56	21.76	21.88	21.58	1
		100	0	21.92	21.96	21.91	1
20M	DFT-S 16QAM	1	1	21.19	21.31	21.01	1
20M	DFT-S 64QAM	1	1	19.76	19.88	19.58	2.5
20M	DFT-S 256QAM	1	1	17.71	17.83	17.53	4.5
20M	CP QPSK	1	1	20.72	20.84	20.54	1.5
BW	MCS Index	Channel		134100	136100	138100	3GPP MPR
		Frequency (MHz)		670.5	680.5	690.5	
15M	DFT-S PI/2 BPSK	1	1	22.88	22.86	22.82	0
15M	DFT-S QPSK	1	1	22.86	22.95	22.89	0
		1	40	22.81	22.93	22.88	0
		1	77	22.84	22.86	22.86	0
		36	0	21.90	21.93	21.88	1
		36	22	22.38	22.45	22.37	0
		36	43	21.69	21.87	21.54	1
		75	0	21.90	21.94	21.90	1
15M	DFT-S 16QAM	1	1	21.11	21.30	20.98	1
15M	DFT-S 64QAM	1	1	19.75	19.83	19.56	2.5
15M	DFT-S 256QAM	1	1	17.66	17.81	17.46	4.5
15M	CP QPSK	1	1	20.70	20.77	20.51	1.5


NR Conducted Power (Laptop Mode Reduction)

NR Band 71_SA

BW	MCS Index	Channel		133600	136100	138600	3GPP MPR
		Frequency (MHz)		668	680.5	693	
10M	DFT-S PI/2 BPSK	1	1	22.78	22.87	22.87	0
10M	DFT-S QPSK	1	1	22.93	22.97	22.86	0
		1	26	22.84	22.86	22.91	0
		1	50	22.87	22.84	22.79	0
		25	0	21.92	21.95	21.92	1
		25	14	22.38	22.47	22.45	0
		25	27	21.74	21.84	21.58	1
		50	0	21.92	21.86	21.84	1
10M	DFT-S 16QAM	1	1	21.15	21.29	20.99	1
10M	DFT-S 64QAM	1	1	19.71	19.84	19.54	2.5
10M	DFT-S 256QAM	1	1	17.65	17.83	17.52	4.5
10M	CP QPSK	1	1	20.65	20.74	20.51	1.5
BW	MCS Index	Channel		133100	136100	139100	3GPP MPR
		Frequency (MHz)		665.5	680.5	695.5	
5M	DFT-S PI/2 BPSK	1	1	22.87	22.83	22.81	0
5M	DFT-S QPSK	1	1	22.88	22.90	22.85	0
		1	13	22.85	22.85	22.88	0
		1	23	22.86	22.79	22.88	0
		12	0	21.92	21.90	21.84	1
		12	7	22.36	22.46	22.47	0
		12	13	21.73	21.87	21.51	1
		25	0	21.82	21.90	21.88	1
5M	DFT-S 16QAM	1	1	21.10	21.28	21.00	1
5M	DFT-S 64QAM	1	1	19.70	19.81	19.53	2.5
5M	DFT-S 256QAM	1	1	17.66	17.76	17.45	4.5
5M	CP QPSK	1	1	20.65	20.83	20.45	1.5

NR Conducted Power (Laptop Mode Reduction)

NR Band 38_SA



BW	MCS Index	Channel		516000	519000	522000	3GPP MPR
		Frequency (MHz)		2580	2595	2610	
20M	DFT-S PI/2 BPSK	1	1	17.32	17.30	17.32	0
20M	DFT-S QPSK	1	1	17.45	17.49	17.47	0
		1	26	17.33	17.38	17.38	0
		1	49	17.28	17.33	17.33	0
		25	0	16.41	16.48	16.45	1
		25	13	17.26	17.31	17.31	0
		25	26	16.37	16.43	16.40	1
		50	0	16.33	16.40	16.36	1
20M	DFT-S 16QAM	1	1	16.28	16.35	16.32	1
20M	DFT-S 64QAM	1	1	14.77	14.88	14.82	2.5
20M	DFT-S 256QAM	1	1	12.76	12.92	12.81	4.5
20M	CP QPSK	1	1	15.77	15.93	15.85	1.5

NR Conducted Power (Laptop Mode Reduction)							
NR Band 38_SA							
BW	MCS Index	Channel		515500	519000	522500	3GPP MPR
		Frequency (MHz)		2577.5	2595	2612.5	
15M	DFT-S PI/2 BPSK	1	1	17.23	17.23	17.25	0
15M	DFT-S QPSK	1	1	17.39	17.39	17.42	0
		1	19	17.29	17.30	17.29	0
		1	36	17.20	17.32	17.23	0
		18	0	16.33	16.41	16.42	1
		18	10	17.21	17.28	17.30	0
		18	20	16.31	16.34	16.30	1
36	0	16.25	16.34	16.32	1		
15M	DFT-S 16QAM	1	1	16.18	16.26	16.22	1
15M	DFT-S 64QAM	1	1	14.77	14.79	14.80	2.5
15M	DFT-S 256QAM	1	1	12.75	12.86	12.79	4.5
15M	CP QPSK	1	1	15.72	15.83	15.75	1.5
BW	MCS Index	Channel		515000	519000	523000	3GPP MPR
		Frequency (MHz)		2575	2595	2615	
10M	DFT-S PI/2 BPSK	1	1	17.23	17.27	17.25	0
10M	DFT-S QPSK	1	1	17.38	17.46	17.46	0
		1	11	17.24	17.29	17.37	0
		1	22	17.26	17.27	17.26	0
		12	0	16.33	16.39	16.43	1
		12	6	17.25	17.28	17.26	0
		12	12	16.27	16.34	16.30	1
24	0	16.32	16.35	16.32	1		
10M	DFT-S 16QAM	1	1	16.18	16.33	16.24	1
10M	DFT-S 64QAM	1	1	14.73	14.82	14.77	2.5
10M	DFT-S 256QAM	1	1	12.67	12.89	12.81	4.5
10M	CP QPSK	1	1	15.71	15.92	15.83	1.5

NR Conducted Power (Laptop Mode Reduction)

NR Band 40_SA

BW	MCS Index	Channel		468000	470000	472000	3GPP MPR
		Frequency (MHz)		2340	2350	2360	
80M	DFT-S PI/2 BPSK	1	1	17.21	17.19	17.20	0
80M	DFT-S QPSK	1	1	17.22	17.21	17.24	0
		1	109	17.18	17.16	17.18	0
		1	215	17.12	17.11	17.15	0
		108	0	16.24	16.28	16.25	1
		108	55	16.62	16.65	16.68	0
		108	109	16.18	16.21	16.24	1
		216	0	16.12	16.14	16.12	1
80M	DFT-S 16QAM	1	1	16.10	16.13	16.16	1
80M	DFT-S 64QAM	1	1	14.61	14.64	14.67	2.5
80M	DFT-S 256QAM	1	1	12.57	12.60	12.63	4.5
80M	CP QPSK	1	1	15.65	15.68	15.71	1.5

NR Conducted Power (Laptop Mode Reduction)							
NR Band 40_SA							
BW	MCS Index	Channel		466000	470000	474000	3GPP MPR
		Frequency (MHz)		2330	2350	2370	
60M	DFT-S PI/2 BPSK	1	1	17.14	17.18	17.11	0
60M	DFT-S QPSK	1	1	17.20	17.18	17.21	0
		1	81	17.17	17.07	17.12	0
		1	160	17.10	17.11	17.05	0
		81	0	16.23	16.27	16.24	1
		81	41	16.52	16.56	16.62	0
		81	81	16.08	16.15	16.20	1
		162	0	16.03	16.05	16.11	1
60M	DFT-S 16QAM	1	1	16.05	16.10	16.11	1
60M	DFT-S 64QAM	1	1	14.52	14.59	14.66	2.5
60M	DFT-S 256QAM	1	1	12.54	12.50	12.56	4.5
60M	CP QPSK	1	1	15.60	15.59	15.67	1.5
BW	MCS Index	Channel		465000	470000	475000	3GPP MPR
		Frequency (MHz)		2325	2350	2375	
50M	DFT-S PI/2 BPSK	1	1	17.20	17.16	17.12	0
50M	DFT-S QPSK	1	1	17.19	17.14	17.15	0
		1	67	17.10	17.11	17.14	0
		1	131	17.03	17.09	17.15	0
		64	0	16.23	16.23	16.19	1
		64	35	16.57	16.65	16.66	0
		64	69	16.15	16.16	16.22	1
		128	0	16.11	16.04	16.12	1
50M	DFT-S 16QAM	1	1	16.06	16.13	16.14	1
50M	DFT-S 64QAM	1	1	14.51	14.54	14.57	2.5
50M	DFT-S 256QAM	1	1	12.52	12.55	12.58	4.5
50M	CP QPSK	1	1	15.58	15.64	15.64	1.5

NR Conducted Power (Laptop Mode Reduction)							
NR Band 40_SA							
BW	MCS Index	Channel		464000	470000	476000	3GPP MPR
		Frequency (MHz)		2320	2350	2380	
40M	DFT-S PI/2 BPSK	1	1	17.13	17.15	17.17	0
40M	DFT-S QPSK	1	1	17.19	17.12	17.21	0
		1	53	17.14	17.13	17.18	0
		1	104	17.09	17.04	17.12	0
		50	0	16.24	16.22	16.20	1
		50	28	16.60	16.58	16.58	0
		50	56	16.17	16.17	16.23	1
		100	0	16.08	16.05	16.09	1
40M	DFT-S 16QAM	1	1	16.08	16.06	16.12	1
40M	DFT-S 64QAM	1	1	14.57	14.62	14.61	2.5
40M	DFT-S 256QAM	1	1	12.56	12.53	12.56	4.5
40M	CP QPSK	1	1	15.57	15.65	15.65	1.5

NR Conducted Power (Laptop Mode Reduction)

NR Band 40_SA

BW	MCS Index	Channel		462000	470000	478000	3GPP MPR
		Frequency (MHz)		2310	2350	2390	
20M	DFT-S PI/2 BPSK	1	1	17.14	17.12	17.20	0
20M	DFT-S QPSK	1	1	17.13	17.17	17.21	0
		1	26	17.14	17.10	17.16	0
		1	49	17.05	17.11	17.13	0
		25	0	16.17	16.19	16.25	1
		25	13	16.62	16.55	16.68	0
		25	26	16.13	16.13	16.21	1
		50	0	16.06	16.11	16.02	1
20M	DFT-S 16QAM	1	1	16.10	16.13	16.08	1
20M	DFT-S 64QAM	1	1	14.57	14.59	14.62	2.5
20M	DFT-S 256QAM	1	1	12.53	12.53	12.53	4.5
20M	CP QPSK	1	1	15.60	15.68	15.69	1.5

NR Conducted Power (Laptop Mode Reduction)							
NR Band 40_SA							
BW	MCS Index	Channel		461500	470000	478500	3GPP MPR
		Frequency (MHz)		2307.5	2350	2392.5	
15M	DFT-S PI/2 BPSK	1	1	17.19	17.11	17.18	0
15M	DFT-S QPSK	1	1	17.18	17.16	17.14	0
		1	19	17.08	17.08	17.15	0
		1	36	17.02	17.03	17.06	0
		18	0	16.14	16.26	16.18	1
		18	10	16.52	16.58	16.64	0
		18	20	16.15	16.14	16.22	1
		36	0	16.11	16.06	16.04	1
15M	DFT-S 16QAM	1	1	16.03	16.13	16.07	1
15M	DFT-S 64QAM	1	1	14.58	14.57	14.60	2.5
15M	DFT-S 256QAM	1	1	12.54	12.54	12.61	4.5
15M	CP QPSK	1	1	15.63	15.67	15.62	1.5
BW	MCS Index	Channel		461000	470000	479000	3GPP MPR
		Frequency (MHz)		2305	2350	2395	
10M	DFT-S PI/2 BPSK	1	1	17.19	17.10	17.20	0
10M	DFT-S QPSK	1	1	17.21	17.14	17.15	0
		1	11	17.16	17.14	17.13	0
		1	22	17.12	17.08	17.08	0
		12	0	16.22	16.19	16.19	1
		12	6	16.61	16.59	16.64	0
		12	12	16.15	16.12	16.16	1
		24	0	16.11	16.13	16.07	1
10M	DFT-S 16QAM	1	1	16.02	16.11	16.15	1
10M	DFT-S 64QAM	1	1	14.57	14.57	14.59	2.5
10M	DFT-S 256QAM	1	1	12.52	12.56	12.59	4.5
10M	CP QPSK	1	1	15.61	15.67	15.67	1.5

NR Conducted Power (Laptop Mode Reduction)									
NR Band 41_SA									
BW	MCS Index	RB Size	RB Offset	Low	Mid-1	Mid-2	Mid-3	High	3GPP MPR (dB)
		Channel		509202	513900	518598	523302	528000	
		Frequency (MHz)		2546.01	2569.5	2592.99	2616.51	2640	
100M	DFT-S PI/2 BPSK	1	1	16.92	16.79	16.88	16.91	16.94	0
100M	DFT-S QPSK	1	1	16.96	16.81	16.91	16.95	16.98	0
		1	137	16.95	16.76	16.89	16.93	16.96	0
		1	271	16.91	16.73	16.86	16.89	16.94	0
		135	0	15.81	15.74	15.82	15.91	15.96	1
		135	69	16.62	16.55	16.55	16.54	16.72	0
		135	138	15.80	15.69	15.85	15.88	15.90	1
		270	0	15.76	15.72	15.77	15.83	15.98	1
100M	DFT-S 16QAM	1	1	15.71	15.68	15.74	15.78	15.92	1
100M	DFT-S 64QAM	1	1	14.31	14.28	14.33	14.38	14.41	2.5
100M	DFT-S 256QAM	1	1	12.29	12.24	12.32	12.37	12.39	4.5
100M	CP QPSK	1	1	15.30	15.26	15.31	15.36	15.42	1.5
BW	MCS Index	Channel		508200	513402	518598	523800	528996	3GPP MPR
		Frequency (MHz)		2541	2567.01	2592.99	2619	2644.98	
90M	DFT-S PI/2 BPSK	1	1	16.92	16.72	16.79	16.81	16.86	0
90M	DFT-S QPSK	1	1	16.92	16.80	16.85	16.93	16.89	0
		1	123	16.94	16.76	16.79	16.85	16.88	0
		1	243	16.89	16.71	16.77	16.83	16.93	0
		120	0	15.71	15.67	15.80	15.85	15.93	1
		120	63	16.57	16.48	16.67	16.54	16.50	0
		120	125	15.78	15.64	15.77	15.80	15.84	1
		243	0	15.68	15.63	15.73	15.80	15.88	1
90M	DFT-S 16QAM	1	1	15.68	15.61	15.73	15.68	15.86	1
90M	DFT-S 64QAM	1	1	14.23	14.22	14.31	14.34	14.38	2.5
90M	DFT-S 256QAM	1	1	12.26	12.15	12.31	12.27	12.31	4.5
90M	CP QPSK	1	1	15.20	15.26	15.27	15.31	15.36	1.5

NR Conducted Power (Laptop Mode Reduction)									
NR Band 41_SA									
BW	MCS Index	Channel		507204	509304	518598	500298	529998	3GPP MPR
		Frequency (MHz)		2536.02	2546.52	2592.99	2621.49	2649.99	
80M	DFT-S PI/2 BPSK	1	1	16.88	16.75	16.86	16.90	16.89	0
80M	DFT-S QPSK	1	1	16.86	16.80	16.90	16.89	16.92	0
		1	109	16.87	16.75	16.82	16.87	16.89	0
		1	215	16.89	16.73	16.81	16.85	16.94	0
		108	0	15.79	15.73	15.82	15.91	15.93	1
		108	55	16.54	16.53	16.66	16.52	16.46	0
		108	109	15.74	15.61	15.83	15.85	15.83	1
		216	0	15.75	15.68	15.73	15.79	15.95	1
80M	DFT-S 16QAM	1	1	15.68	15.66	15.74	15.72	15.86	1
80M	DFT-S 64QAM	1	1	14.27	14.23	14.24	14.34	14.33	2.5
80M	DFT-S 256QAM	1	1	12.23	12.24	12.31	12.28	12.29	4.5
80M	CP QPSK	1	1	15.28	15.22	15.24	15.27	15.42	1.5
BW	MCS Index	Channel		506202	512400	518598	524802	531000	3GPP MPR
		Frequency (MHz)		2531.01	2562	2592.99	2624.01	2655	
70M	DFT-S PI/2 BPSK	1	1	16.89	16.78	16.87	16.82	16.93	0
70M	DFT-S QPSK	1	1	16.86	16.79	16.82	16.94	16.91	0
		1	95	16.92	16.69	16.83	16.87	16.90	0
		1	187	16.84	16.69	16.83	16.85	16.94	0
		90	0	15.77	15.64	15.72	15.88	15.86	1
		90	50	16.60	16.47	16.65	16.51	16.47	0
		90	99	15.78	15.66	15.83	15.86	15.82	1
		180	0	15.67	15.64	15.74	15.78	15.88	1
70M	DFT-S 16QAM	1	1	15.61	15.62	15.68	15.70	15.87	1
70M	DFT-S 64QAM	1	1	14.25	14.19	14.28	14.36	14.34	2.5
70M	DFT-S 256QAM	1	1	12.23	12.15	12.23	12.29	12.30	4.5
70M	CP QPSK	1	1	15.30	15.26	15.31	15.33	15.38	1.5

NR Conducted Power (Laptop Mode Reduction)									
NR Band 41_SA									
BW	MCS Index	Channel		505200	511896	518598	525294	531996	3GPP MPR
		Frequency (MHz)		2526	2559.48	2592.99	2626.48	2659.98	
60M	DFT-S PI/2 BPSK	1	1	16.83	16.71	16.84	16.87	16.91	0
60M	DFT-S QPSK	1	1	16.96	16.75	16.81	16.94	16.94	0
		1	81	16.85	16.74	16.82	16.85	16.87	0
		1	160	16.90	16.65	16.86	16.81	16.86	0
		81	0	15.77	15.66	15.72	15.84	15.88	1
		81	41	16.56	16.47	16.63	16.53	16.46	0
		81	81	15.80	15.62	15.76	15.86	15.81	1
		162	0	15.66	15.65	15.76	15.80	15.91	1
60M	DFT-S 16QAM	1	1	15.68	15.59	15.74	15.71	15.86	1
60M	DFT-S 64QAM	1	1	14.30	14.27	14.26	14.28	14.38	2.5
60M	DFT-S 256QAM	1	1	12.20	12.18	12.30	12.29	12.33	4.5
60M	CP QPSK	1	1	15.26	15.26	15.22	15.35	15.32	1.5
BW	MCS Index	Channel		504204	511404	518598	525798	532998	3GPP MPR
		Frequency (MHz)		2521.02	2557.02	2592.99	2628.99	2664.99	
50M	DFT-S PI/2 BPSK	1	1	16.83	16.69	16.84	16.82	16.89	0
50M	DFT-S QPSK	1	1	16.89	16.81	16.86	16.89	16.93	0
		1	67	16.86	16.74	16.87	16.88	16.89	0
		1	131	16.83	16.72	16.85	16.87	16.91	0
		64	0	15.73	15.74	15.76	15.89	15.94	1
		64	35	16.56	16.50	16.69	16.50	16.49	0
		64	69	15.80	15.63	15.80	15.83	15.82	1
		128	0	15.69	15.69	15.77	15.76	15.91	1
50M	DFT-S 16QAM	1	1	15.62	15.64	15.69	15.70	15.84	1
50M	DFT-S 64QAM	1	1	14.29	14.24	14.28	14.30	14.33	2.5
50M	DFT-S 256QAM	1	1	12.22	12.18	12.27	12.27	12.38	4.5
50M	CP QPSK	1	1	15.24	15.26	15.21	15.35	15.34	1.5

NR Conducted Power (Laptop Mode Reduction)

NR Band 41_SA

BW	MCS Index	Channel		503202	510900	518598	526296	534000	3GPP MPR
		Frequency (MHz)		2516.01	2554.5	2592.99	2631.48	2670	
40M	DFT-S PI/2 BPSK	1	1	16.88	16.77	16.86	16.85	16.93	0
40M	DFT-S QPSK	1	1	16.90	16.74	16.87	16.90	16.88	0
		1	53	16.89	16.73	16.83	16.88	16.93	0
		1	104	16.90	16.71	16.82	16.82	16.88	0
		50	0	15.76	15.69	15.73	15.81	15.91	1
		50	28	16.62	16.52	16.69	16.44	16.50	0
		50	56	15.71	15.61	15.83	15.80	15.88	1
		100	0	15.74	15.67	15.74	15.75	15.90	1
40M	DFT-S 16QAM	1	1	15.71	15.59	15.64	15.69	15.84	1
40M	DFT-S 64QAM	1	1	14.25	14.18	14.23	14.36	14.40	2.5
40M	DFT-S 256QAM	1	1	12.24	12.19	12.26	12.29	12.37	4.5
40M	CP QPSK	1	1	15.22	15.21	15.30	15.31	15.38	1.5

NR Conducted Power (Laptop Mode Reduction)									
NR Band 41_SA									
BW	MCS Index	Channel		501204	509898	518598	527298	535998	3GPP MPR
		Frequency (MHz)		2506.02	2549.49	2592.99	2636.49	2679.99	
20M	DFT-S PI/2 BPSK	1	1	16.91	16.72	16.87	16.83	16.84	0
20M	DFT-S QPSK	1	1	16.96	16.76	16.91	16.85	16.89	0
		1	26	16.86	16.70	16.83	16.84	16.93	0
		1	49	16.90	16.71	16.80	16.80	16.87	0
		25	0	15.73	15.65	15.79	15.90	15.87	1
		25	13	16.58	16.52	16.70	16.54	16.53	0
		25	26	15.78	15.66	15.85	15.87	15.87	1
50	0	15.70	15.65	15.76	15.76	15.97	1		
20M	DFT-S 16QAM	1	1	15.66	15.60	15.67	15.70	15.89	1
20M	DFT-S 64QAM	1	1	14.21	14.21	14.33	14.29	14.36	2.5
20M	DFT-S 256QAM	1	1	12.29	12.21	12.32	12.36	12.34	4.5
20M	CP QPSK	1	1	15.22	15.20	15.21	15.33	15.32	1.5
BW	MCS Index	Channel		500700	509646	518598	527544	536496	3GPP MPR
		Frequency (MHz)		2503.5	2548.23	2592.99	2637.72	2682.48	
15M	DFT-S PI/2 BPSK	1	1	16.87	16.75	16.86	16.87	16.93	0
15M	DFT-S QPSK	1	1	16.87	16.77	16.85	16.92	16.97	0
		1	19	16.88	16.69	16.87	16.89	16.95	0
		1	36	16.84	16.63	16.78	16.81	16.90	0
		18	0	15.77	15.70	15.78	15.89	15.94	1
		18	10	16.58	16.48	16.68	16.49	16.45	0
		18	20	15.76	15.64	15.77	15.81	15.87	1
36	0	15.68	15.64	15.71	15.77	15.94	1		
15M	DFT-S 16QAM	1	1	15.70	15.66	15.70	15.74	15.89	1
15M	DFT-S 64QAM	1	1	14.28	14.18	14.27	14.28	14.32	2.5
15M	DFT-S 256QAM	1	1	12.22	12.19	12.29	12.34	12.31	4.5
15M	CP QPSK	1	1	15.23	15.26	15.30	15.33	15.41	1.5

NR Conducted Power (Laptop Mode Reduction)									
NR Band 41_SA									
BW	MCS Index	Channel		500202	509400	518598	527796	537000	3GPP MPR
		Frequency (MHz)		2501.01	2547	2592.99	2638.98	2685	
10M	DFT-S PI/2 BPSK	1	1	16.85	16.79	16.84	16.81	16.90	0
10M	DFT-S QPSK	1	1	16.86	16.76	16.81	16.88	16.93	0
		1	11	16.93	16.75	16.87	16.86	16.92	0
		1	22	16.88	16.72	16.80	16.86	16.86	0
		12	0	15.80	15.64	15.79	15.81	15.95	1
		12	6	16.62	16.45	16.62	16.49	16.46	0
		12	12	15.74	15.61	15.85	15.82	15.83	1
		24	0	15.75	15.72	15.67	15.75	15.98	1
10M	DFT-S 16QAM	1	1	15.68	15.67	15.67	15.70	15.88	1
10M	DFT-S 64QAM	1	1	14.30	14.26	14.32	14.33	14.34	2.5
10M	DFT-S 256QAM	1	1	12.21	12.14	12.30	12.33	12.29	4.5
10M	CP QPSK	1	1	15.22	15.16	15.28	15.26	15.38	1.5

NR Conducted Power (Laptop Mode Reduction)									
NR Band 77_SA									
BW	MCS Index	RB Size	RB Offset	Low	Mid-1	Mid-2	Mid-3	High	3GPP MPR (dB)
		Channel		650000	653000	656000	659000	662000	
		Frequency (MHz)		3750	3795	3840	3885	3930	
100M	DFT-S PI/2 BPSK	1	1	18.01	18.09	18.15	18.18	18.09	0
100M	DFT-S QPSK	1	1	18.06	18.12	18.21	18.27	18.21	0
		1	137	18.03	18.11	18.20	18.21	18.16	0
		1	271	18.01	18.09	18.16	18.16	18.15	0
		135	0	17.17	17.22	17.29	17.33	17.24	1
		135	69	18.04	18.12	18.14	18.18	18.15	0
		135	138	17.31	17.36	17.42	17.44	17.38	1
100M	DFT-S 16QAM	1	1	16.99	17.00	17.09	17.17	17.08	1
100M	DFT-S 64QAM	1	1	15.60	15.67	15.70	15.78	15.78	2.5
100M	DFT-S 256QAM	1	1	13.67	13.71	13.78	13.87	13.82	4.5
100M	CP QPSK	1	1	16.83	16.91	16.96	16.97	16.88	1.5
BW	MCS Index	Channel		649668	652834	656000	659166	662332	3GPP MPR
		Frequency (MHz)		3745.02	3792.51	3840	3887.49	3934.98	
90M	DFT-S PI/2 BPSK	1	1	17.91	18.09	18.07	18.12	18.06	0
90M	DFT-S QPSK	1	1	18.02	18.07	18.17	18.20	18.18	0
		1	123	17.95	18.02	18.13	18.20	18.08	0
		1	243	18.00	18.07	18.13	18.06	18.09	0
		120	0	17.16	17.21	17.23	17.28	17.18	1
		120	63	18.02	18.04	18.10	18.09	18.08	0
		120	125	17.24	17.33	17.38	17.41	17.31	1
90M	DFT-S 16QAM	1	1	16.97	16.96	17.03	17.11	17.04	1
90M	DFT-S 64QAM	1	1	15.52	15.57	15.60	15.74	15.69	2.5
90M	DFT-S 256QAM	1	1	13.66	13.70	13.75	13.81	13.75	4.5
90M	CP QPSK	1	1	16.73	16.90	16.86	16.95	16.81	1.5

NR Conducted Power (Laptop Mode Reduction)									
NR Band 77_SA									
BW	MCS Index	Channel		649334	652666	656000	659334	662666	3GPP MPR
		Frequency (MHz)		3740.01	3789.99	3840	3890.01	3939.99	
80M	DFT-S PI/2 BPSK	1	1	17.95	18.06	18.11	18.18	18.05	0
80M	DFT-S QPSK	1	1	17.98	18.06	18.17	18.23	18.16	0
		1	109	17.97	18.10	18.15	18.13	18.11	0
		1	215	17.92	17.99	18.06	18.14	18.11	0
		108	0	17.14	17.20	17.29	17.28	17.22	1
		108	55	17.94	18.05	18.07	18.13	18.15	0
		108	109	17.23	17.29	17.42	17.36	17.36	1
216	0	16.95	17.05	17.16	17.11	17.06	1		
80M	DFT-S 16QAM	1	1	16.97	17.00	17.03	17.12	16.99	1
80M	DFT-S 64QAM	1	1	15.54	15.67	15.60	15.69	15.70	2.5
80M	DFT-S 256QAM	1	1	13.59	13.66	13.72	13.87	13.80	4.5
80M	CP QPSK	1	1	16.76	16.86	16.95	16.88	16.79	1.5
BW	MCS Index	Channel		649000	652500	656000	659500	663000	3GPP MPR
		Frequency (MHz)		3735	3787.5	3840	3892.5	3945	
70M	DFT-S PI/2 BPSK	1	1	17.98	18.07	18.09	18.12	18.04	0
70M	DFT-S QPSK	1	1	18.01	18.02	18.20	18.21	18.20	0
		1	95	18.03	18.04	18.17	18.21	18.14	0
		1	187	17.98	18.09	18.14	18.12	18.08	0
		90	0	17.16	17.21	17.22	17.24	17.15	1
		90	50	18.04	18.04	18.13	18.18	18.12	0
		90	99	17.28	17.35	17.42	17.37	17.38	1
180	0	16.97	17.11	17.18	17.21	17.11	1		
70M	DFT-S 16QAM	1	1	16.93	16.92	17.06	17.17	17.04	1
70M	DFT-S 64QAM	1	1	15.52	15.67	15.65	15.69	15.77	2.5
70M	DFT-S 256QAM	1	1	13.60	13.64	13.68	13.87	13.81	4.5
70M	CP QPSK	1	1	16.80	16.84	16.95	16.91	16.83	1.5

NR Conducted Power (Laptop Mode Reduction)									
NR Band 77_SA									
BW	MCS Index	Channel		648668	652334	656000	659666	663332	3GPP MPR
		Frequency (MHz)		3730.02	3785.01	3840	3894.99	3949.98	
60M	DFT-S PI/2 BPSK	1	1	17.98	17.99	18.13	18.17	18.06	0
60M	DFT-S QPSK	1	1	18.02	18.06	18.21	18.23	18.11	0
		1	81	17.98	18.01	18.14	18.11	18.15	0
		1	160	17.99	18.03	18.14	18.07	18.09	0
		81	0	17.07	17.14	17.26	17.30	17.19	1
		81	41	18.00	18.03	18.12	18.11	18.10	0
		81	81	17.29	17.30	17.39	17.34	17.28	1
162	0	17.02	17.10	17.11	17.13	17.14	1		
60M	DFT-S 16QAM	1	1	16.94	16.94	17.07	17.11	17.06	1
60M	DFT-S 64QAM	1	1	15.55	15.62	15.60	15.68	15.75	2.5
60M	DFT-S 256QAM	1	1	13.60	13.65	13.75	13.80	13.81	4.5
60M	CP QPSK	1	1	16.79	16.85	16.95	16.95	16.78	1.5
BW	MCS Index	Channel		648334	652166	656000	659834	663666	3GPP MPR
		Frequency (MHz)		3725.01	3782.49	3840	3897.51	3954.99	
50M	DFT-S PI/2 BPSK	1	1	17.91	18.04	18.14	18.13	18.01	0
50M	DFT-S QPSK	1	1	17.99	18.12	18.12	18.23	18.17	0
		1	67	18.03	18.10	18.14	18.21	18.12	0
		1	131	17.93	18.09	18.15	18.14	18.15	0
		64	0	17.13	17.21	17.19	17.24	17.16	1
		64	35	18.01	18.04	18.09	18.14	18.06	0
		64	69	17.24	17.33	17.38	17.37	17.35	1
128	0	16.95	17.04	17.15	17.12	17.13	1		
50M	DFT-S 16QAM	1	1	16.96	16.99	17.05	17.11	17.05	1
50M	DFT-S 64QAM	1	1	15.55	15.61	15.69	15.68	15.71	2.5
50M	DFT-S 256QAM	1	1	13.62	13.61	13.77	13.84	13.78	4.5
50M	CP QPSK	1	1	16.77	16.82	16.87	16.92	16.85	1.5

NR Conducted Power (Laptop Mode Reduction)									
NR Band 77_SA									
BW	MCS Index	Channel		648000	652000	656000	660000	664000	3GPP MPR
		Frequency (MHz)		3720	3780	3840	3900	3960	
40M	DFT-S PI/2 BPSK	1	1	17.92	18.00	18.11	18.14	18.01	0
40M	DFT-S QPSK	1	1	17.96	18.02	18.18	18.21	18.20	0
		1	53	18.01	18.05	18.10	18.16	18.11	0
		1	104	17.91	18.08	18.07	18.10	18.07	0
		50	0	17.16	17.14	17.19	17.28	17.15	1
		50	28	17.96	18.10	18.08	18.09	18.15	0
		50	56	17.22	17.36	17.39	17.38	17.33	1
100	0	17.04	17.07	17.20	17.12	17.08	1		
40M	DFT-S 16QAM	1	1	16.89	16.99	17.09	17.15	16.98	1
40M	DFT-S 64QAM	1	1	15.57	15.65	15.65	15.76	15.78	2.5
40M	DFT-S 256QAM	1	1	13.59	13.69	13.73	13.79	13.79	4.5
40M	CP QPSK	1	1	16.74	16.89	16.95	16.92	16.81	1.5
BW	MCS Index	Channel		647668	651834	656000	660166	664332	3GPP MPR
		Frequency (MHz)		3715.02	3777.51	3840	3902.49	3964.98	
30M	DFT-S PI/2 BPSK	1	1	18.01	18.09	18.12	18.15	18.09	0
30M	DFT-S QPSK	1	1	18.03	18.08	18.17	18.21	18.18	0
		1	39	17.93	18.03	18.16	18.15	18.11	0
		1	76	17.97	18.01	18.08	18.12	18.13	0
		36	0	17.14	17.17	17.22	17.27	17.24	1
		36	21	18.01	18.07	18.05	18.14	18.12	0
		36	42	17.25	17.30	17.33	17.37	17.35	1
75	0	17.01	17.12	17.17	17.17	17.05	1		
30M	DFT-S 16QAM	1	1	16.98	16.98	17.06	17.07	17.05	1
30M	DFT-S 64QAM	1	1	15.51	15.60	15.61	15.76	15.71	2.5
30M	DFT-S 256QAM	1	1	13.62	13.70	13.78	13.85	13.78	4.5
30M	CP QPSK	1	1	16.82	16.86	16.87	16.94	16.80	1.5

NR Conducted Power (Laptop Mode Reduction)

NR Band 77_SA

BW	MCS Index	Channel		647334	651666	656000	660266	664666	3GPP MPR
		Frequency (MHz)		3710.01	3774.99	3840	3903.99	3969.99	
20M	DFT-S PI/2 BPSK	1	1	17.93	18.02	18.10	18.17	18.05	0
20M	DFT-S QPSK	1	1	18.01	18.05	18.14	18.19	18.17	0
		1	26	17.96	18.04	18.15	18.13	18.09	0
		1	49	17.93	17.99	18.07	18.06	18.07	0
		25	0	17.09	17.20	17.29	17.27	17.14	1
		25	13	18.03	18.03	18.14	18.09	18.11	0
		25	26	17.30	17.35	17.40	17.34	17.37	1
20M	DFT-S 16QAM	1	1	16.89	16.90	17.06	17.15	17.07	1
20M	DFT-S 64QAM	1	1	15.60	15.64	15.69	15.68	15.75	2.5
20M	DFT-S 256QAM	1	1	13.67	13.69	13.76	13.87	13.72	4.5
20M	CP QPSK	1	1	16.82	16.84	16.96	16.90	16.82	1.5

NR Conducted Power (Laptop Mode Reduction)									
NR Band 77_SA									
BW	MCS Index	Channel		647168	651584	656000	660416	664832	3GPP MPR
		Frequency (MHz)		3707.52	3773.76	3840	3906.24	3972.48	
15M	DFT-S PI/2 BPSK	1	1	17.93	18.05	18.05	18.16	18.00	0
15M	DFT-S QPSK	1	1	18.04	18.07	18.21	18.24	18.20	0
		1	19	17.96	18.11	18.13	18.17	18.06	0
		1	36	17.95	18.00	18.13	18.13	18.11	0
		18	0	17.13	17.12	17.22	17.24	17.21	1
		18	10	17.95	18.12	18.08	18.12	18.09	0
		18	20	17.28	17.29	17.35	17.42	17.38	1
36	0	16.95	17.11	17.19	17.14	17.09	1		
15M	DFT-S 16QAM	1	1	16.97	16.96	17.01	17.09	17.06	1
15M	DFT-S 64QAM	1	1	15.58	15.59	15.60	15.71	15.74	2.5
15M	DFT-S 256QAM	1	1	13.67	13.63	13.78	13.85	13.81	4.5
15M	CP QPSK	1	1	16.78	16.89	16.88	16.92	16.79	1.5
BW	MCS Index	Channel		647000	651500	656000	660500	665000	3GPP MPR
		Frequency (MHz)		3705	3772.5	3840	3907.5	3975	
10M	DFT-S PI/2 BPSK	1	1	17.96	18.06	18.07	18.16	18.02	0
10M	DFT-S QPSK	1	1	18.01	18.10	18.15	18.25	18.15	0
		1	11	17.95	18.02	18.18	18.19	18.06	0
		1	22	17.98	18.00	18.16	18.15	18.11	0
		12	0	17.11	17.22	17.19	17.32	17.21	1
		12	6	18.03	18.03	18.05	18.12	18.12	0
		12	12	17.31	17.35	17.38	17.39	17.34	1
24	0	17.01	17.06	17.15	17.20	17.12	1		
10M	DFT-S 16QAM	1	1	16.93	16.96	17.08	17.14	16.99	1
10M	DFT-S 64QAM	1	1	15.53	15.60	15.61	15.77	15.78	2.5
10M	DFT-S 256QAM	1	1	13.58	13.70	13.77	13.85	13.72	4.5
10M	CP QPSK	1	1	16.80	16.86	16.94	16.95	16.88	1.5

NR Conducted Power (Laptop Mode Reduction)							
NR Band 78_SA							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel			650000		
		Frequency (MHz)			3750		
100M	DFT-S PI/2 BPSK	1	1		18.71		0
100M	DFT-S QPSK	1	1		18.82		0
		1	137		18.74		0
		1	271		18.71		0
		135	0		17.78		1
		135	69		18.72		0
		135	138		17.76		1
		270	0		17.72		1
100M	DFT-S 16QAM	1	1		17.71		1
100M	DFT-S 64QAM	1	1		15.75		2.5
100M	DFT-S 256QAM	1	1		13.68		4.5
100M	CP QPSK	1	1		16.79		1.5
BW	MCS Index	Channel		649668	650000	650332	3GPP MPR
		Frequency (MHz)		3745.02	3750	3754.98	
90M	DFT-S PI/2 BPSK	1	1	18.52	18.62	18.59	0
90M	DFT-S QPSK	1	1	18.61	18.73	18.69	0
		1	123	18.64	18.74	18.70	0
		1	243	18.45	18.61	18.53	0
		120	0	17.60	17.70	17.70	1
		120	63	18.65	18.66	18.65	0
		120	125	17.58	17.68	17.63	1
		243	0	17.58	17.71	17.67	1
90M	DFT-S 16QAM	1	1	17.46	17.64	17.55	1
90M	DFT-S 64QAM	1	1	15.56	15.73	15.66	2.5
90M	DFT-S 256QAM	1	1	13.46	13.60	13.50	4.5
90M	CP QPSK	1	1	16.64	16.76	16.66	1.5

NR Conducted Power (Laptop Mode Reduction)							
NR Band 78_SA							
BW	MCS Index	Channel		649334	650000	650666	3GPP MPR
		Frequency (MHz)		3740.01	3750	3759.99	
80M	DFT-S PI/2 BPSK	1	1	18.45	18.58	18.57	0
80M	DFT-S QPSK	1	1	18.57	18.71	18.67	0
		1	109	18.54	18.70	18.61	0
		1	215	18.39	18.59	18.48	0
		108	0	17.52	17.62	17.70	1
		108	55	18.61	18.63	18.58	0
		108	109	17.53	17.64	17.57	1
		216	0	17.55	17.69	17.57	1
80M	DFT-S 16QAM	1	1	17.37	17.54	17.55	1
80M	DFT-S 64QAM	1	1	15.50	15.67	15.58	2.5
80M	DFT-S 256QAM	1	1	13.36	13.59	13.48	4.5
80M	CP QPSK	1	1	16.63	16.68	16.57	1.5
BW	MCS Index	Channel		649000		651000	3GPP MPR
		Frequency (MHz)		3735		3765	
70M	DFT-S PI/2 BPSK	1	1	18.42		18.49	0
70M	DFT-S QPSK	1	1	18.61		18.59	0
		1	95	18.58		18.70	0
		1	187	18.35		18.53	0
		90	0	17.55		17.68	1
		90	50	18.60		18.65	0
		90	99	17.48		17.54	1
		180	0	17.56		17.64	1
70M	DFT-S 16QAM	1	1	17.40		17.55	1
70M	DFT-S 64QAM	1	1	15.56		15.62	2.5
70M	DFT-S 256QAM	1	1	13.46		13.42	4.5
70M	CP QPSK	1	1	16.58		16.56	1.5

NR Conducted Power (Laptop Mode Reduction)							
NR Band 78_SA							
BW	MCS Index	Channel		648668	650000	651332	3GPP MPR
		Frequency (MHz)		3730.02	3750	3769.98	
60M	DFT-S PI/2 BPSK	1	1	18.43	18.56	18.51	0
60M	DFT-S QPSK	1	1	18.56	18.73	18.59	0
		1	81	18.62	18.69	18.62	0
		1	160	18.42	18.60	18.44	0
		81	0	17.52	17.64	17.62	1
		81	41	18.57	18.60	18.62	0
		81	81	17.54	17.63	17.57	1
		162	0	17.58	17.65	17.65	1
60M	DFT-S 16QAM	1	1	17.39	17.64	17.53	1
60M	DFT-S 64QAM	1	1	15.47	15.73	15.58	2.5
60M	DFT-S 256QAM	1	1	13.44	13.54	13.40	4.5
60M	CP QPSK	1	1	16.64	16.76	16.65	1.5
BW	MCS Index	Channel		648334	650000	651666	3GPP MPR
		Frequency (MHz)		3725.01	3750	3774.99	
50M	DFT-S PI/2 BPSK	1	1	18.44	18.57	18.52	0
50M	DFT-S QPSK	1	1	18.57	18.72	18.65	0
		1	67	18.64	18.70	18.65	0
		1	131	18.38	18.54	18.43	0
		64	0	17.59	17.68	17.66	1
		64	35	18.57	18.64	18.60	0
		64	69	17.56	17.66	17.60	1
		128	0	17.58	17.70	17.63	1
50M	DFT-S 16QAM	1	1	17.42	17.59	17.54	1
50M	DFT-S 64QAM	1	1	15.56	15.68	15.59	2.5
50M	DFT-S 256QAM	1	1	13.38	13.51	13.44	4.5
50M	CP QPSK	1	1	16.56	16.70	16.62	1.5

NR Conducted Power (Laptop Mode Reduction)							
NR Band 78_SA							
BW	MCS Index	Channel		648000	650000	652000	3GPP MPR
		Frequency (MHz)		3720	3750	3780	
40M	DFT-S PI/2 BPSK	1	1	18.47	18.62	18.52	0
40M	DFT-S QPSK	1	1	18.53	18.69	18.61	0
		1	53	18.62	18.73	18.61	0
		1	104	18.41	18.61	18.43	0
		50	0	17.52	17.63	17.70	1
		50	28	18.63	18.56	18.65	0
		50	56	17.57	17.61	17.56	1
		100	0	17.50	17.66	17.58	1
40M	DFT-S 16QAM	1	1	17.44	17.57	17.45	1
40M	DFT-S 64QAM	1	1	15.47	15.63	15.64	2.5
40M	DFT-S 256QAM	1	1	13.45	13.60	13.47	4.5
40M	CP QPSK	1	1	16.63	16.69	16.65	1.5
BW	MCS Index	Channel		647668	650000	652332	3GPP MPR
		Frequency (MHz)		3715.02	3750	3784.98	
30M	DFT-S PI/2 BPSK	1	1	18.45	18.60	18.58	0
30M	DFT-S QPSK	1	1	18.56	18.67	18.66	0
		1	39	18.64	18.72	18.63	0
		1	76	18.39	18.57	18.50	0
		36	0	17.55	17.60	17.66	1
		36	21	18.63	18.60	18.59	0
		36	42	17.50	17.66	17.61	1
		75	0	17.51	17.61	17.64	1
30M	DFT-S 16QAM	1	1	17.46	17.55	17.49	1
30M	DFT-S 64QAM	1	1	15.52	15.73	15.58	2.5
30M	DFT-S 256QAM	1	1	13.37	13.50	13.46	4.5
30M	CP QPSK	1	1	16.56	16.66	16.66	1.5

NR Conducted Power (Laptop Mode Reduction)

NR Band 78_SA

BW	MCS Index	Channel		647334	650000	652666	3GPP MPR
		Frequency (MHz)		3710.01	3750	3789.99	
20M	DFT-S PI/2 BPSK	1	1	18.47	18.61	18.58	0
20M	DFT-S QPSK	1	1	18.55	18.64	18.59	0
		1	26	18.56	18.67	18.70	0
		1	49	18.41	18.60	18.51	0
		25	0	17.51	17.66	17.64	1
		25	13	18.63	18.60	18.55	0
		25	26	17.49	17.66	17.55	1
		50	0	17.54	17.61	17.63	1
20M	DFT-S 16QAM	1	1	17.37	17.54	17.48	1
20M	DFT-S 64QAM	1	1	15.56	15.70	15.61	2.5
20M	DFT-S 256QAM	1	1	13.39	13.58	13.40	4.5
20M	CP QPSK	1	1	16.54	16.66	16.63	1.5

NR Conducted Power (Laptop Mode Reduction)							
NR Band 78_SA							
BW	MCS Index	Channel		647168	650000	652832	3GPP MPR
		Frequency (MHz)		3707.52	3750	3792.48	
15M	DFT-S PI/2 BPSK	1	1	18.52	18.61	18.58	0
15M	DFT-S QPSK	1	1	18.59	18.68	18.65	0
		1	19	18.63	18.73	18.64	0
		1	36	18.40	18.61	18.53	0
		18	0	17.58	17.60	17.70	1
		18	10	18.65	18.60	18.56	0
		18	20	17.52	17.65	17.57	1
36	0	17.53	17.62	17.61	1		
15M	DFT-S 16QAM	1	1	17.44	17.61	17.52	1
15M	DFT-S 64QAM	1	1	15.51	15.69	15.61	2.5
15M	DFT-S 256QAM	1	1	13.45	13.51	13.45	4.5
15M	CP QPSK	1	1	16.57	16.75	16.61	1.5
BW	MCS Index	Channel		647000	650000	653000	3GPP MPR
		Frequency (MHz)		3705	3750	3795	
10M	DFT-S PI/2 BPSK	1	1	18.49	18.61	18.54	0
10M	DFT-S QPSK	1	1	18.59	18.63	18.67	0
		1	11	18.58	18.68	18.67	0
		1	22	18.37	18.59	18.46	0
		12	0	17.52	17.63	17.62	1
		12	6	18.55	18.63	18.64	0
		12	12	17.49	17.61	17.58	1
24	0	17.52	17.69	17.62	1		
10M	DFT-S 16QAM	1	1	17.39	17.59	17.47	1
10M	DFT-S 64QAM	1	1	15.49	15.67	15.62	2.5
10M	DFT-S 256QAM	1	1	13.45	13.60	13.46	4.5
10M	CP QPSK	1	1	16.58	16.70	16.64	1.5

WCDMA Conducted Power (Tablet Mode Reduction)

Band	WCDMA II			WCDMA IV			WCDMA V		
TX Channel	9262	9400	9538	1312	1413	1513	4132	4182	4233
Rx Channel	9662	9800	9938	1537	1638	1738	4357	4407	4458
Frequency	1852.4	1880	1907.6	1712.4	1732.6	1752.6	826.4	836.4	846.6
RMC 12.2K	13.96	13.92	13.94	13.97	13.94	13.93	18.44	18.39	18.37
HSDPA Subtest-1	13.26	13.22	13.24	13.16	13.13	13.12	17.49	17.44	17.42
HSDPA Subtest-2	13.23	13.19	13.21	13.12	13.09	13.08	17.42	17.37	17.35
HSDPA Subtest-3	12.62	12.58	12.60	12.45	12.42	12.41	16.91	16.86	16.84
HSDPA Subtest-4	12.56	12.52	12.54	12.40	12.37	12.36	16.88	16.83	16.81
DC-HSDPA Subtest-1	13.25	13.21	13.23	13.14	13.11	13.10	17.46	17.41	17.39
DC-HSDPA Subtest-2	13.20	13.16	13.18	13.09	13.06	13.05	17.40	17.35	17.33
DC-HSDPA Subtest-3	12.56	12.52	12.54	12.41	12.38	12.37	16.89	16.84	16.82
DC-HSDPA Subtest-4	12.50	12.46	12.48	12.37	12.34	12.33	16.86	16.81	16.79
HSUPA Subtest-1	13.22	13.18	13.20	13.10	13.07	13.06	17.47	17.42	17.40
HSUPA Subtest-2	11.87	11.83	11.85	11.68	11.65	11.64	16.21	16.16	16.14
HSUPA Subtest-3	12.79	12.75	12.77	12.62	12.59	12.58	17.27	17.22	17.20
HSUPA Subtest-4	11.85	11.81	11.83	11.74	11.71	11.70	16.26	16.21	16.19
HSUPA Subtest-5	12.18	12.14	12.16	12.11	12.08	12.07	17.23	17.18	17.16

LTE Conducted Power (Tablet Mode Reduction)									
LTE Band 2									
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)		
		Channel		18700	18900	19100			
		Frequency (MHz)		1860	1880	1900			
20M	QPSK	1	0	13.99	13.96	13.95	0		
		1	50	13.97	13.94	13.93	0		
		1	99	13.95	13.92	13.91	0		
		50	0	12.97	12.95	12.92	1		
		50	25	12.96	12.93	12.92	1		
		50	50	12.94	12.91	12.90	1		
20M	16QAM	100	0	12.94	12.92	12.89	1		
		1	0	12.92	12.89	12.88	1		
		1	50	12.90	12.87	12.86	1		
		1	99	12.87	12.84	12.83	1		
		50	0	11.96	11.93	11.92	2		
		50	25	11.95	11.92	11.91	2		
20M	64QAM	50	50	11.91	11.88	11.87	2		
		100	0	11.94	11.91	11.90	2		
		1	0	11.98	11.95	11.94	2		
		1	50	11.96	11.93	11.92	2		
		1	99	11.94	11.91	11.90	2		
		50	0	10.99	10.96	10.95	3		
20M	256QAM	50	25	10.97	10.94	10.93	3		
		50	50	10.94	10.91	10.90	3		
		100	0	10.96	10.93	10.92	3		
		1	0	8.99	8.87	8.89	5		
		1	50	8.88	8.85	8.93	5		
		1	99	8.93	8.82	8.83	5		
20M	256QAM	50	0	8.93	8.92	8.81	5		
		50	25	8.86	8.91	8.87	5		
		50	50	8.86	8.92	8.84	5		
		100	0	8.95	8.82	8.86	5		
		BW	MCS Index	Channel		18675	18900	19125	3GPP MPR
		Frequency (MHz)		1857.5	1880	1902.5			
15M	QPSK	1	0	13.92	13.96	13.86	0		
		1	37	13.88	13.91	13.89	0		
		1	74	13.93	13.87	13.85	0		
		36	0	12.90	12.95	12.86	1		
		36	19	12.92	12.87	12.86	1		
		36	39	12.92	12.88	12.84	1		
15M	16QAM	75	0	12.92	12.86	12.85	1		
		1	0	12.82	12.79	12.83	1		
		1	37	12.89	12.84	12.81	1		
		1	74	12.81	12.75	12.80	1		
		36	0	11.96	11.86	11.89	2		
		36	19	11.85	11.92	11.84	2		
15M	64QAM	36	39	11.88	11.87	11.77	2		
		75	0	11.87	11.88	11.88	2		
		1	0	11.88	11.88	11.88	2		
		1	37	11.91	11.85	11.83	2		
		1	74	11.93	11.85	11.83	2		
		36	0	10.93	10.92	10.92	3		
15M	256QAM	36	19	10.93	10.91	10.85	3		
		36	39	10.87	10.81	10.86	3		
		75	0	10.92	10.93	10.83	3		
		1	0	8.93	8.86	8.92	5		
		1	37	8.89	8.93	8.84	5		
		1	74	8.86	8.89	8.82	5		
15M	256QAM	36	0	8.93	8.92	8.88	5		
		36	19	8.93	8.89	8.87	5		
		36	39	8.86	8.83	8.86	5		
		75	0	8.85	8.91	8.84	5		

LTE Conducted Power (Tablet Mode Reduction)									
LTE Band 2									
BW	MCS Index	Channel		18650	18900	19150	3GPP MPR		
		Frequency (MHz)		1855	1880	1905			
10M	QPSK	1	0	13.80	13.79	13.86	0		
		1	24	13.86	13.77	13.76	0		
		1	49	13.87	13.81	13.71	0		
		25	0	12.85	12.92	12.77	1		
		25	12	12.87	12.88	12.80	1		
		25	25	12.86	12.72	12.74	1		
10M	16QAM	50	0	12.83	12.78	12.69	1		
		1	0	12.80	12.72	12.78	1		
		1	24	12.67	12.69	12.64	1		
		1	49	12.81	12.74	12.63	1		
		25	0	11.85	11.77	11.87	2		
		25	12	11.84	11.78	11.81	2		
10M	64QAM	25	25	11.79	11.72	11.74	2		
		50	0	11.80	11.67	11.83	2		
		1	0	11.80	11.83	11.73	2		
		1	24	11.85	11.85	11.76	2		
		1	49	11.93	11.75	11.79	2		
		25	0	10.84	10.82	10.85	3		
10M	256QAM	25	12	10.86	10.85	10.72	3		
		25	25	10.88	10.87	10.75	3		
		50	0	10.90	10.68	10.82	3		
		1	0	8.90	8.86	8.88	5		
		1	24	8.91	8.87	8.83	5		
		1	49	8.88	8.82	8.90	5		
10M	256QAM	25	0	8.86	8.82	8.87	5		
		25	12	8.91	8.85	8.89	5		
		25	25	8.91	8.83	8.89	5		
		50	0	8.95	8.92	8.87	5		
		BW	MCS Index	Channel		18625	18900	19175	3GPP MPR
				Frequency (MHz)		1852.5	1880	1907.5	
5M	QPSK	1	0	13.89	13.93	13.84	0		
		1	12	13.92	13.93	13.85	0		
		1	24	13.83	13.84	13.69	0		
		12	0	12.91	12.85	12.69	1		
		12	6	12.95	12.84	12.80	1		
		12	13	12.86	12.76	12.69	1		
5M	16QAM	25	0	12.82	12.90	12.79	1		
		1	0	12.86	12.70	12.84	1		
		1	12	12.85	12.65	12.69	1		
		1	24	12.80	12.69	12.72	1		
		12	0	11.90	11.81	11.83	2		
		12	6	11.71	11.77	11.76	2		
5M	64QAM	12	13	11.73	11.73	11.82	2		
		25	0	11.84	11.71	11.76	2		
		1	0	11.81	11.81	11.83	2		
		1	12	11.80	11.86	11.77	2		
		1	24	11.90	11.79	11.79	2		
		12	0	10.88	10.91	10.77	3		
5M	256QAM	12	6	10.80	10.83	10.89	3		
		12	13	10.86	10.82	10.77	3		
		25	0	10.85	10.82	10.75	3		
		1	0	8.95	8.89	8.94	5		
		1	12	8.89	8.90	8.85	5		
		1	24	8.94	8.88	8.81	5		
5M	256QAM	12	0	8.92	8.82	8.87	5		
		12	6	8.86	8.84	8.87	5		
		12	13	8.87	8.83	8.85	5		
		25	0	8.94	8.85	8.89	5		

LTE Conducted Power (Tablet Mode Reduction)									
LTE Band 2									
BW	MCS Index	Channel		18615	18900	19185	3GPP MPR		
		Frequency (MHz)		1851.5	1880	1908.5			
3M	QPSK	1	0	13.77	13.91	13.89	0		
		1	7	13.91	13.79	13.78	0		
		1	14	13.89	13.83	13.73	0		
		8	0	12.87	12.75	12.83	1		
		8	3	12.81	12.84	12.76	1		
		8	7	12.76	12.68	12.80	1		
3M	16QAM	15	0	12.91	12.79	12.79	1		
		1	0	12.81	12.82	12.82	1		
		1	7	12.80	12.74	12.82	1		
		1	14	12.71	12.72	12.64	1		
		8	0	11.73	11.77	11.74	2		
		8	3	11.71	11.82	11.80	2		
3M	64QAM	8	7	11.71	11.73	11.78	2		
		15	0	11.88	11.75	11.78	2		
		1	0	11.73	11.77	11.81	2		
		1	7	11.88	11.74	11.81	2		
		1	14	11.81	11.71	11.84	2		
		8	0	10.74	10.86	10.86	3		
3M	256QAM	8	3	10.88	10.72	10.86	3		
		8	7	10.86	10.71	10.78	3		
		15	0	10.84	10.91	10.81	3		
		1	0	8.99	8.91	8.91	5		
		1	7	8.96	8.87	8.93	5		
		1	14	8.90	8.83	8.88	5		
3M	256QAM	8	0	8.90	8.87	8.81	5		
		8	3	8.94	8.88	8.85	5		
		8	7	8.90	8.92	8.82	5		
		15	0	8.89	8.92	8.90	5		
		BW	MCS Index	Channel		18607	18900	19193	3GPP MPR
				Frequency (MHz)		1850.7	1880	1909.3	
1.4M	QPSK	1	0	13.85	13.77	13.90	0		
		1	2	13.90	13.87	13.84	0		
		1	5	13.89	13.91	13.78	0		
		3	0	13.95	13.76	13.78	0		
		3	1	13.79	13.79	13.72	0		
		3	3	13.85	13.82	13.85	0		
1.4M	16QAM	6	0	12.74	12.73	12.72	1		
		1	0	12.75	12.71	12.68	1		
		1	2	12.76	12.72	12.77	1		
		1	5	12.83	12.71	12.67	1		
		3	0	12.74	12.82	12.72	1		
		3	1	12.74	12.72	12.80	1		
1.4M	64QAM	3	3	12.82	12.82	12.74	1		
		6	0	11.84	11.71	11.71	2		
		1	0	11.84	11.89	11.87	2		
		1	2	11.84	11.77	11.80	2		
		1	5	11.90	11.77	11.75	2		
		3	0	11.80	11.82	11.91	2		
1.4M	256QAM	3	1	11.87	11.86	11.81	2		
		3	3	11.75	11.89	11.78	2		
		6	0	10.77	10.75	10.79	3		
		1	0	8.94	8.86	8.89	5		
		1	2	8.97	8.90	8.83	5		
		1	5	8.92	8.85	8.86	5		
1.4M	256QAM	3	0	8.89	8.89	8.82	5		
		3	1	8.92	8.92	8.90	5		
		3	3	8.89	8.88	8.85	5		
		6	0	8.89	8.86	8.85	5		

LTE Conducted Power (Tablet Mode Reduction)									
LTE Band 4									
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)		
		Channel		20050	20175	20300			
		Frequency (MHz)		1720	1732.5	1745			
20M	QPSK	1	0	14.48	14.44	14.43	0		
		1	50	14.46	14.42	14.41	0		
		1	99	14.43	14.39	14.38	0		
		50	0	13.47	13.45	13.42	1		
		50	25	13.46	13.43	13.42	1		
		50	50	13.45	13.41	13.40	1		
20M	16QAM	100	0	13.44	13.42	13.41	1		
		1	0	13.48	13.44	13.43	1		
		1	50	13.46	13.42	13.41	1		
		1	99	13.42	13.38	13.37	1		
		50	0	12.48	12.44	12.43	2		
		50	25	12.45	12.41	12.40	2		
20M	64QAM	50	50	12.41	12.37	12.36	2		
		100	0	12.43	12.39	12.38	2		
		1	0	12.46	12.42	12.41	2		
		1	50	12.43	12.39	12.38	2		
		1	99	12.40	12.36	12.35	2		
		50	0	11.50	11.46	11.45	3		
20M	256QAM	50	25	11.46	11.42	11.41	3		
		50	50	11.42	11.38	11.37	3		
		100	0	11.45	11.41	11.40	3		
		1	0	9.43	9.43	9.37	5		
		1	50	9.40	9.32	9.37	5		
		1	99	9.37	9.31	9.33	5		
20M	256QAM	50	0	9.39	9.36	9.38	5		
		50	25	9.31	9.24	9.32	5		
		50	50	9.33	9.20	9.34	5		
		100	0	9.40	9.29	9.23	5		
		BW	MCS Index	Channel		20025	20175	20325	3GPP MPR
		Frequency (MHz)		1717.5	1732.5	1747.5			
15M	QPSK	1	0	14.40	14.44	14.41	0		
		1	37	14.41	14.42	14.33	0		
		1	74	14.37	14.36	14.37	0		
		36	0	13.42	13.41	13.40	1		
		36	19	13.43	13.39	13.34	1		
		36	39	13.45	13.34	13.39	1		
15M	16QAM	75	0	13.38	13.34	13.31	1		
		1	0	13.44	13.44	13.37	1		
		1	37	13.39	13.39	13.32	1		
		1	74	13.34	13.36	13.37	1		
		36	0	12.44	12.41	12.36	2		
		36	19	12.35	12.32	12.31	2		
15M	64QAM	36	39	12.35	12.35	12.30	2		
		75	0	12.33	12.33	12.34	2		
		1	0	12.46	12.40	12.37	2		
		1	37	12.43	12.39	12.35	2		
		1	74	12.33	12.26	12.28	2		
		36	0	11.43	11.37	11.35	3		
15M	256QAM	36	19	11.37	11.38	11.35	3		
		36	39	11.35	11.38	11.34	3		
		75	0	11.43	11.38	11.39	3		
		1	0	9.40	9.44	9.39	5		
		1	37	9.41	9.36	9.33	5		
		1	74	9.36	9.29	9.33	5		
15M	256QAM	36	0	9.44	9.32	9.35	5		
		36	19	9.34	9.30	9.31	5		
		36	39	9.31	9.21	9.32	5		
		75	0	9.35	9.35	9.26	5		

LTE Conducted Power (Tablet Mode Reduction)							
LTE Band 4							
BW	MCS Index	Channel		20000	20175	20350	3GPP MPR
		Frequency (MHz)		1715	1732.5	1750	
10M	QPSK	1	0	14.30	14.38	14.32	0
		1	24	14.32	14.25	14.36	0
		1	49	14.24	14.20	14.25	0
		25	0	13.34	13.40	13.27	1
		25	12	13.31	13.37	13.31	1
		25	25	13.35	13.20	13.33	1
		50	0	13.32	13.30	13.35	1
10M	16QAM	1	0	13.37	13.21	13.30	1
		1	24	13.29	13.19	13.28	1
		1	49	13.27	13.29	13.28	1
		25	0	12.31	12.21	12.34	2
		25	12	12.40	12.29	12.30	2
		25	25	12.32	12.25	12.25	2
		50	0	12.30	12.19	12.20	2
10M	64QAM	1	0	12.43	12.40	12.36	2
		1	24	12.41	12.26	12.19	2
		1	49	12.34	12.24	12.27	2
		25	0	11.43	11.28	11.34	3
		25	12	11.44	11.25	11.31	3
		25	25	11.30	11.37	11.31	3
		50	0	11.44	11.30	11.33	3
10M	256QAM	1	0	9.37	9.36	9.33	5
		1	24	9.38	9.26	9.21	5
		1	49	9.32	9.28	9.36	5
		25	0	9.31	9.30	9.37	5
		25	12	9.28	9.27	9.25	5
		25	25	9.23	9.28	9.24	5
		50	0	9.38	9.28	9.20	5
BW	MCS Index	Channel		19975	20175	20375	3GPP MPR
		Frequency (MHz)		1712.5	1732.5	1752.5	
5M	QPSK	1	0	14.31	14.28	14.19	0
		1	12	14.31	14.29	14.17	0
		1	24	14.29	14.32	14.16	0
		12	0	13.39	13.21	13.14	1
		12	6	13.25	13.40	13.27	1
		12	13	13.39	13.33	13.20	1
		25	0	13.35	13.40	13.15	1
5M	16QAM	1	0	13.41	13.28	13.36	1
		1	12	13.37	13.28	13.31	1
		1	24	13.28	13.30	13.26	1
		12	0	12.30	12.33	12.34	2
		12	6	12.41	12.36	12.28	2
		12	13	12.32	12.31	12.23	2
		25	0	12.38	12.27	12.24	2
5M	64QAM	1	0	12.33	12.32	12.30	2
		1	12	12.23	12.22	12.30	2
		1	24	12.31	12.17	12.30	2
		12	0	11.26	11.35	11.41	3
		12	6	11.33	11.23	11.32	3
		12	13	11.25	11.20	11.13	3
		25	0	11.37	11.25	11.27	3
5M	256QAM	1	0	9.41	9.31	9.40	5
		1	12	9.44	9.28	9.29	5
		1	24	9.29	9.34	9.22	5
		12	0	9.42	9.25	9.26	5
		12	6	9.33	9.18	9.17	5
		12	13	9.30	9.19	9.19	5
		25	0	9.38	9.30	9.20	5

LTE Conducted Power (Tablet Mode Reduction)									
LTE Band 4									
BW	MCS Index	Channel		19965	20175	20385	3GPP MPR		
		Frequency (MHz)		1711.5	1732.5	1753.5			
3M	QPSK	1	0	14.46	14.35	14.20	0		
		1	7	14.34	14.23	14.31	0		
		1	14	14.36	14.33	14.22	0		
		8	0	13.40	13.25	13.32	1		
		8	3	13.42	13.36	13.36	1		
		8	7	13.28	13.31	13.27	1		
3M	16QAM	15	0	13.23	13.28	13.39	1		
		1	0	13.32	13.28	13.37	1		
		1	7	13.34	13.35	13.22	1		
		1	14	13.30	13.29	13.31	1		
		8	0	12.33	12.33	12.38	2		
		8	3	12.27	12.22	12.19	2		
3M	64QAM	8	7	12.37	12.15	12.25	2		
		15	0	12.28	12.36	12.30	2		
		1	0	12.36	12.28	12.40	2		
		1	7	12.32	12.28	12.23	2		
		1	14	12.35	12.16	12.21	2		
		8	0	11.30	11.32	11.33	3		
3M	256QAM	8	3	11.38	11.25	11.26	3		
		8	7	11.36	11.20	11.25	3		
		15	0	11.34	11.29	11.31	3		
		1	0	9.33	9.26	9.29	5		
		1	7	9.29	9.34	9.22	5		
		1	14	9.36	9.30	9.27	5		
3M	256QAM	8	0	9.30	9.24	9.33	5		
		8	3	9.38	9.22	9.31	5		
		8	7	9.21	9.19	9.27	5		
		15	0	9.36	9.29	9.21	5		
		BW	MCS Index	Channel		19957	20175	20393	3GPP MPR
				Frequency (MHz)		1710.7	1732.5	1754.3	
1.4M	QPSK	1	0	14.30	14.32	14.32	0		
		1	2	14.33	14.25	14.29	0		
		1	5	14.24	14.17	14.31	0		
		3	0	14.29	14.29	14.37	0		
		3	1	14.29	14.31	14.20	0		
		3	3	14.34	14.27	14.25	0		
1.4M	16QAM	6	0	13.38	13.29	13.39	1		
		1	0	13.37	13.32	13.21	1		
		1	2	13.30	13.19	13.29	1		
		1	5	13.27	13.36	13.35	1		
		3	0	13.31	13.28	13.37	1		
		3	1	13.36	13.23	13.24	1		
1.4M	64QAM	3	3	13.19	13.25	13.24	1		
		6	0	12.25	12.19	12.25	2		
		1	0	12.38	12.21	12.31	2		
		1	2	12.21	12.25	12.20	2		
		1	5	12.34	12.20	12.31	2		
		3	0	12.38	12.35	12.30	2		
1.4M	256QAM	3	1	12.36	12.26	12.27	2		
		3	3	12.39	12.28	12.23	2		
		6	0	11.35	11.24	11.18	3		
		1	0	9.39	9.25	9.32	5		
		1	2	9.37	9.39	9.26	5		
		1	5	9.33	9.26	9.27	5		
1.4M	256QAM	3	0	9.37	9.27	9.38	5		
		3	1	9.28	9.19	9.23	5		
		3	3	9.23	9.21	9.24	5		
		6	0	9.40	9.29	9.21	5		

LTE Conducted Power (Tablet Mode Reduction)									
LTE Band 5									
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)		
		Channel		20450	20525	20600			
		Frequency (MHz)		829	836.5	844			
10M	QPSK	1	0	18.47	18.44	18.41	0		
		1	24	18.45	18.42	18.39	0		
		1	49	18.42	18.39	18.36	0		
		25	0	17.48	17.44	17.42	1		
		25	12	17.44	17.41	17.38	1		
		25	25	17.42	17.39	17.36	1		
10M	16QAM	50	0	17.45	17.42	17.41	1		
		1	0	17.46	17.43	17.40	1		
		1	24	17.44	17.41	17.38	1		
		1	49	17.41	17.38	17.35	1		
		25	0	16.50	16.47	16.44	2		
		25	12	16.48	16.45	16.42	2		
10M	64QAM	25	25	16.45	16.42	16.39	2		
		50	0	16.46	16.43	16.40	2		
		1	0	16.48	16.45	16.42	2		
		1	24	16.45	16.42	16.39	2		
		1	49	16.42	16.39	16.36	2		
		25	0	15.47	15.44	15.41	3		
10M	256QAM	25	12	15.44	15.41	15.38	3		
		25	25	15.40	15.37	15.34	3		
		50	0	15.42	15.39	15.36	3		
		1	0	13.43	13.38	13.35	5		
		1	24	13.42	13.36	13.39	5		
		1	49	13.42	13.32	13.29	5		
10M	256QAM	25	0	13.37	13.30	13.31	5		
		25	12	13.39	13.31	13.31	5		
		25	25	13.35	13.28	13.22	5		
		50	0	13.44	13.37	13.28	5		
		BW	MCS Index	Channel		20425	20525	20625	3GPP MPR
		Frequency (MHz)		826.5	836.5	846.5			
5M	QPSK	1	0	18.42	18.40	18.39	0		
		1	12	18.42	18.41	18.37	0		
		1	24	18.35	18.34	18.29	0		
		12	0	17.42	17.35	17.38	1		
		12	6	17.37	17.34	17.29	1		
		12	13	17.40	17.31	17.32	1		
5M	16QAM	25	0	17.39	17.39	17.30	1		
		1	0	17.44	17.43	17.36	1		
		1	12	17.39	17.37	17.34	1		
		1	24	17.34	17.35	17.34	1		
		12	0	16.47	16.45	16.35	2		
		12	6	16.46	16.43	16.33	2		
5M	64QAM	12	13	16.41	16.32	16.37	2		
		25	0	16.46	16.33	16.35	2		
		1	0	16.41	16.36	16.42	2		
		1	12	16.42	16.38	16.38	2		
		1	24	16.33	16.39	16.32	2		
		12	0	15.47	15.38	15.31	3		
5M	256QAM	12	6	15.41	15.36	15.28	3		
		12	13	15.39	15.32	15.34	3		
		25	0	15.42	15.32	15.34	3		
		1	0	13.28	13.30	13.30	5		
		1	12	13.26	13.31	13.18	5		
		1	24	13.31	13.35	13.21	5		
5M	256QAM	12	0	13.38	13.20	13.31	5		
		12	6	13.28	13.24	13.23	5		
		12	13	13.16	13.23	13.29	5		
		25	0	13.18	13.23	13.14	5		

LTE Conducted Power (Tablet Mode Reduction)									
LTE Band 5									
BW	MCS Index	Channel		20415	20525	20635	3GPP MPR		
		Frequency (MHz)		825.5	836.5	847.5			
3M	QPSK	1	0	18.32	18.35	18.28	0		
		1	7	18.45	18.28	18.19	0		
		1	14	18.29	18.35	18.14	0		
		8	0	17.35	17.37	17.22	1		
		8	3	17.20	17.20	17.35	1		
		8	7	17.34	17.28	17.27	1		
3M	16QAM	15	0	17.28	17.23	17.32	1		
		1	0	17.27	17.32	17.30	1		
		1	7	17.26	17.29	17.19	1		
		1	14	17.30	17.35	17.32	1		
		8	0	16.43	16.33	16.37	2		
		8	3	16.42	16.42	16.28	2		
3M	64QAM	8	7	16.34	16.19	16.22	2		
		15	0	16.41	16.35	16.19	2		
		1	0	16.38	16.34	16.25	2		
		1	7	16.32	16.33	16.27	2		
		1	14	16.24	16.20	16.27	2		
		8	0	15.30	15.32	15.21	3		
3M	256QAM	8	3	15.39	15.39	15.25	3		
		8	7	15.21	15.35	15.24	3		
		15	0	15.29	15.22	15.26	3		
		1	0	13.23	13.25	13.17	5		
		1	7	13.33	13.23	13.30	5		
		1	14	13.24	13.19	13.20	5		
3M	256QAM	8	0	13.31	13.33	13.20	5		
		8	3	13.39	13.26	13.25	5		
		8	7	13.35	13.24	13.22	5		
		15	0	13.33	13.26	13.27	5		
		BW	MCS Index	Channel		20407	20525	20643	3GPP MPR
				Frequency (MHz)		824.7	836.5	848.3	
1.4M	QPSK	1	0	18.32	18.34	18.31	0		
		1	2	18.32	18.35	18.20	0		
		1	5	18.39	18.23	18.14	0		
		3	0	17.42	17.41	17.17	0		
		3	1	17.35	17.32	17.25	0		
		3	3	17.30	17.17	17.11	0		
1.4M	16QAM	6	0	17.22	17.21	17.20	1		
		1	0	17.33	17.26	17.20	1		
		1	2	17.27	17.35	17.27	1		
		1	5	17.21	17.23	17.16	1		
		3	0	16.44	16.40	16.35	1		
		3	1	16.35	16.39	16.39	1		
1.4M	64QAM	3	3	16.35	16.27	16.27	1		
		6	0	16.34	16.24	16.22	2		
		1	0	16.39	16.34	16.25	2		
		1	2	16.40	16.40	16.16	2		
		1	5	16.29	16.22	16.18	2		
		3	0	15.30	15.24	15.29	2		
1.4M	256QAM	3	1	15.34	15.36	15.26	2		
		3	3	15.30	15.32	15.19	2		
		6	0	15.26	15.29	15.20	3		
		1	0	13.38	13.31	13.25	5		
		1	2	13.39	13.27	13.31	5		
		1	5	13.42	13.32	13.19	5		
1.4M	256QAM	3	0	13.37	13.25	13.23	5		
		3	1	13.29	13.27	13.23	5		
		3	3	13.31	13.27	13.18	5		
		6	0	13.43	13.36	13.22	5		

LTE Conducted Power (Tablet Mode Reduction)							
LTE Band 7							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		20850	21100	21350	
		Frequency (MHz)		2510	2535	2560	
20M	QPSK	1	0	11.42	11.49	11.47	0
		1	50	10.37	10.44	10.42	0
		1	99	11.39	11.46	11.44	0
		50	0	10.40	10.47	10.45	1
		50	25	10.38	10.45	10.43	1
		50	50	10.37	10.44	10.42	1
		100	0	10.36	10.43	10.41	1
20M	16QAM	1	0	10.38	10.45	10.43	1
		1	50	10.36	10.43	10.41	1
		1	99	10.34	10.41	10.39	1
		50	0	9.29	9.36	9.34	2
		50	25	9.30	9.37	9.35	2
		50	50	9.34	9.41	9.39	2
		100	0	9.33	9.40	9.38	2
20M	64QAM	1	0	9.37	9.44	9.42	2
		1	50	9.28	9.35	9.33	2
		1	99	9.25	9.32	9.30	2
		50	0	8.35	8.42	8.40	3
		50	25	8.33	8.40	8.38	3
		50	50	8.32	8.39	8.37	3
		100	0	8.28	8.35	8.33	3
20M	256QAM	1	0	6.35	6.42	6.40	5
		1	50	6.32	6.39	6.37	5
		1	99	6.28	6.35	6.33	5
		50	0	6.30	6.37	6.35	5
		50	25	6.27	6.34	6.32	5
		50	50	6.27	6.34	6.32	5
		100	0	6.23	6.30	6.28	5
BW	MCS Index	Channel		20825	21100	21375	3GPP MPR
		Frequency (MHz)		2507.5	2535	2562.5	
15M	QPSK	1	0	11.33	11.39	11.43	0
		1	37	10.36	10.39	10.35	0
		1	74	11.35	11.39	11.39	0
		36	0	10.31	10.38	10.44	1
		36	19	10.37	10.38	10.37	1
		36	39	10.37	10.34	10.37	1
		75	0	10.26	10.37	10.39	1
15M	16QAM	1	0	10.37	10.35	10.43	1
		1	37	10.36	10.43	10.37	1
		1	74	10.24	10.35	10.36	1
		36	0	9.19	9.27	9.32	2
		36	19	9.26	9.37	9.35	2
		36	39	9.33	9.32	9.36	2
		75	0	9.32	9.31	9.31	2
15M	64QAM	1	0	9.34	9.43	9.39	2
		1	37	9.24	9.28	9.29	2
		1	74	9.19	9.32	9.20	2
		36	0	8.30	8.34	8.33	3
		36	19	8.33	8.30	8.31	3
		36	39	8.23	8.39	8.30	3
		75	0	8.23	8.30	8.27	3
15M	256QAM	1	0	6.35	6.33	6.31	5
		1	37	6.23	6.37	6.36	5
		1	74	6.22	6.35	6.23	5
		36	0	6.30	6.32	6.34	5
		36	19	6.18	6.27	6.26	5
		36	39	6.22	6.29	6.30	5
		75	0	6.18	6.23	6.21	5

LTE Conducted Power (Tablet Mode Reduction)									
LTE Band 7									
BW	MCS Index	Channel		20800	21100	21400	3GPP MPR		
		Frequency (MHz)		2505	2535	2565			
10M	QPSK	1	0	11.23	11.30	11.36	0		
		1	24	10.27	10.39	10.32	0		
		1	49	11.25	11.35	11.30	0		
		25	0	10.28	10.31	10.40	1		
		25	12	10.32	10.29	10.35	1		
		25	25	10.34	10.32	10.35	1		
10M	16QAM	50	0	10.19	10.33	10.37	1		
		1	0	10.28	10.39	10.36	1		
		1	24	9.30	9.36	9.31	1		
		1	49	10.31	10.29	10.30	1		
		25	0	9.25	9.30	9.38	2		
		25	12	9.30	9.37	9.27	2		
10M	64QAM	25	25	9.34	9.33	9.35	2		
		50	0	9.26	9.36	9.35	2		
		1	0	9.31	9.30	9.40	2		
		1	24	8.34	8.34	8.27	2		
		1	49	9.27	9.35	9.38	2		
		25	0	8.30	8.38	8.41	3		
10M	256QAM	25	12	8.28	8.38	8.27	3		
		25	25	8.29	8.27	8.31	3		
		50	0	8.22	8.32	8.35	3		
		1	0	6.36	6.44	6.34	5		
		1	24	5.34	5.38	5.31	5		
		1	49	6.30	6.33	6.31	5		
10M	256QAM	25	0	6.26	6.43	6.37	5		
		25	12	6.32	6.44	6.36	5		
		25	25	6.19	6.36	6.30	5		
		50	0	6.28	6.31	6.32	5		
		BW	MCS Index	Channel		20775	21100	21425	3GPP MPR
		Frequency (MHz)		2502.5	2535	2567.5			
5M	QPSK	1	0	11.25	11.39	11.33	0		
		1	12	10.36	10.39	10.25	0		
		1	24	11.30	11.29	11.39	0		
		12	0	10.28	10.38	10.44	1		
		12	6	10.28	10.36	10.35	1		
		12	13	10.30	10.32	10.31	1		
5M	16QAM	25	0	10.25	10.32	10.38	1		
		1	0	10.23	10.31	10.38	1		
		1	12	9.35	9.29	9.26	1		
		1	24	10.32	10.35	10.37	1		
		12	0	9.22	9.29	9.40	2		
		12	6	9.29	9.32	9.32	2		
5M	64QAM	12	13	9.33	9.28	9.34	2		
		25	0	9.20	9.31	9.37	2		
		1	0	9.27	9.34	9.40	2		
		1	12	8.32	8.33	8.32	2		
		1	24	9.34	9.33	9.35	2		
		12	0	8.24	8.34	8.34	3		
5M	256QAM	12	6	8.29	8.34	8.36	3		
		12	13	8.27	8.27	8.28	3		
		25	0	8.18	8.28	8.35	3		
		1	0	6.30	6.46	6.43	5		
		1	12	5.34	5.42	5.27	5		
		1	24	6.27	6.38	6.38	5		
5M	256QAM	12	0	6.32	6.43	6.39	5		
		12	6	6.31	6.38	6.27	5		
		12	13	6.20	6.40	6.32	5		
		25	0	6.22	6.32	6.27	5		

LTE Conducted Power (Tablet Mode Reduction)									
LTE Band 12									
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)		
		Channel		23060	23095	23130			
		Frequency (MHz)		704	707.5	711			
10M	QPSK	1	0	16.43	16.47	16.45	0		
		1	24	16.41	16.45	16.43	0		
		1	49	16.38	16.42	16.40	0		
		25	0	15.41	15.44	15.42	1		
		25	12	15.38	15.42	15.40	1		
		25	25	15.37	15.41	15.39	1		
10M	16QAM	50	0	15.36	15.42	15.38	1		
		1	0	15.39	15.43	15.41	1		
		1	24	15.37	15.41	15.39	1		
		1	49	15.34	15.38	15.36	1		
		25	0	14.42	14.46	14.44	2		
		25	12	14.38	14.42	14.40	2		
10M	64QAM	25	25	14.33	14.37	14.35	2		
		50	0	14.35	14.39	14.37	2		
		1	0	14.40	14.44	14.42	2		
		1	24	14.37	14.41	14.39	2		
		1	49	14.34	14.38	14.36	2		
		25	0	13.43	13.47	13.45	3		
10M	256QAM	25	12	13.41	13.45	13.43	3		
		25	25	13.38	13.42	13.40	3		
		50	0	13.39	13.43	13.41	3		
		1	0	11.35	11.41	11.41	5		
		1	24	11.32	11.42	11.35	5		
		1	49	11.31	11.34	11.39	5		
10M	256QAM	25	0	11.32	11.39	11.37	5		
		25	12	11.33	11.28	11.28	5		
		25	25	11.25	11.34	11.35	5		
		50	0	11.40	11.46	11.33	5		
		BW	MCS Index	Channel		23035	23095	23155	3GPP MPR
				Frequency (MHz)		701.5	707.5	713.5	
5M	QPSK	1	0	16.33	16.46	16.35	0		
		1	12	16.36	16.44	16.38	0		
		1	24	16.28	16.38	16.32	0		
		12	0	15.33	15.39	15.37	1		
		12	6	15.32	15.42	15.35	1		
		12	13	15.37	15.35	15.36	1		
5M	16QAM	25	0	15.29	15.32	15.30	1		
		1	0	15.31	15.36	15.35	1		
		1	12	15.29	15.34	15.37	1		
		1	24	15.24	15.33	15.32	1		
		12	0	14.35	14.43	14.41	2		
		12	6	14.37	14.39	14.30	2		
5M	64QAM	12	13	14.24	14.29	14.34	2		
		25	0	14.28	14.34	14.28	2		
		1	0	14.33	14.35	14.32	2		
		1	12	14.31	14.31	14.29	2		
		1	24	14.27	14.36	14.36	2		
		12	0	13.36	13.43	13.35	3		
5M	256QAM	12	6	13.40	13.41	13.37	3		
		12	13	13.31	13.38	13.37	3		
		25	0	13.34	13.43	13.33	3		
		1	0	11.22	11.35	11.36	5		
		1	12	11.33	11.33	11.38	5		
		1	24	11.22	11.29	11.28	5		
5M	256QAM	12	0	11.29	11.17	11.31	5		
		12	6	11.27	11.27	11.35	5		
		12	13	11.17	11.32	11.34	5		
		25	0	11.16	11.32	11.36	5		

LTE Conducted Power (Tablet Mode Reduction)									
LTE Band 12									
BW	MCS Index	Channel		23025	23095	23165	3GPP MPR		
		Frequency (MHz)		700.5	707.5	714.5			
3M	QPSK	1	0	16.28	16.29	16.32	0		
		1	7	16.35	16.28	16.28	0		
		1	14	16.33	16.27	16.30	0		
		8	0	15.25	15.33	15.39	1		
		8	3	15.16	15.35	15.24	1		
		8	7	15.24	15.23	15.29	1		
3M	16QAM	15	0	15.23	15.24	15.22	1		
		1	0	15.26	15.36	15.28	1		
		1	7	15.27	15.18	15.34	1		
		1	14	15.16	15.27	15.26	1		
		8	0	14.23	14.41	14.33	2		
		8	3	14.30	14.34	14.30	2		
3M	64QAM	8	7	14.12	14.25	14.12	2		
		15	0	14.32	14.28	14.27	2		
		1	0	14.24	14.29	14.33	2		
		1	7	14.22	14.26	14.29	2		
		1	14	14.20	14.30	14.22	2		
		8	0	13.32	13.28	13.35	3		
3M	256QAM	8	3	13.22	13.27	13.40	3		
		8	7	13.15	13.26	13.33	3		
		15	0	13.27	13.30	13.23	3		
		1	0	11.35	11.39	11.34	5		
		1	7	11.37	11.34	11.28	5		
		1	14	11.26	11.24	11.24	5		
3M	256QAM	8	0	11.28	11.33	11.31	5		
		8	3	11.30	11.23	11.25	5		
		8	7	11.09	11.34	11.28	5		
		15	0	11.34	11.36	11.31	5		
		BW	MCS Index	Channel		23017	23095	23173	3GPP MPR
				Frequency (MHz)		699.7	707.5	715.3	
1.4M	QPSK	1	0	16.32	16.39	16.23	0		
		1	2	16.32	16.26	16.20	0		
		1	5	16.34	16.34	16.15	0		
		3	0	15.33	15.28	15.09	0		
		3	1	15.27	15.23	15.11	0		
		3	3	15.22	15.26	15.23	0		
1.4M	16QAM	6	0	15.21	15.25	15.20	1		
		1	0	15.31	15.38	15.29	1		
		1	2	15.12	15.26	15.28	1		
		1	5	15.30	15.16	15.26	1		
		3	0	14.34	14.28	14.33	1		
		3	1	14.21	14.25	14.39	1		
1.4M	64QAM	3	3	14.16	14.33	14.26	1		
		6	0	14.23	14.25	14.23	2		
		1	0	14.27	14.42	14.31	2		
		1	2	14.24	14.35	14.28	2		
		1	5	14.23	14.22	14.26	2		
		3	0	13.24	13.30	13.40	2		
1.4M	256QAM	3	1	13.27	13.33	13.32	2		
		3	3	13.20	13.29	13.26	2		
		6	0	13.32	13.30	13.32	3		
		1	0	11.29	11.38	11.34	5		
		1	2	11.29	11.41	11.25	5		
		1	5	11.25	11.33	11.29	5		
1.4M	256QAM	3	0	11.29	11.33	11.28	5		
		3	1	11.28	11.18	11.20	5		
		3	3	11.18	11.31	11.28	5		
		6	0	11.33	11.39	11.33	5		

LTE Conducted Power (Tablet Mode Reduction)							
LTE Band 13							
BW	MCS Index	RB Size	RB Offset		Mid		3GPP MPR (dB)
		Channel			23230		
		Frequency (MHz)			782		
10M	QPSK	1	0		16.98		0
		1	24		16.97		0
		1	49		16.94		0
		25	0		15.99		1
		25	12		15.96		1
		25	25		15.93		1
		50	0		15.96		1
10M	16QAM	1	0		15.97		1
		1	24		15.94		1
		1	49		15.93		1
		25	0		14.95		2
		25	12		14.93		2
		25	25		14.91		2
		50	0		14.92		2
10M	64QAM	1	0		14.94		2
		1	24		14.93		2
		1	49		14.89		2
		25	0		13.96		3
		25	12		13.94		3
		25	25		13.92		3
		50	0		13.93		3
10M	256QAM	1	0		11.92		5
		1	24		11.97		5
		1	49		11.90		5
		25	0		11.90		5
		25	12		11.93		5
		25	25		11.79		5
		50	0		11.83		5
BW	MCS Index	Channel		23205	23230	23255	3GPP MPR
		Frequency (MHz)		779.5	782	784.5	
5M	QPSK	1	0	16.91	16.95	16.93	0
		1	12	16.88	16.92	16.90	0
		1	24	16.84	16.88	16.86	0
		12	0	15.90	15.94	15.92	1
		12	6	15.88	15.92	15.90	1
		12	13	15.87	15.91	15.89	1
		25	0	15.87	15.91	15.89	1
5M	16QAM	1	0	15.92	15.96	15.94	1
		1	12	15.89	15.93	15.91	1
		1	24	15.87	15.91	15.89	1
		12	0	14.93	14.97	14.95	2
		12	6	14.90	14.94	14.92	2
		12	13	14.88	14.92	14.90	2
		25	0	14.89	14.93	14.91	2
5M	64QAM	1	0	14.92	14.96	14.94	2
		1	12	14.89	14.93	14.91	2
		1	24	14.87	14.91	14.89	2
		12	0	13.92	13.96	13.94	3
		12	6	13.90	13.94	13.92	3
		12	13	13.87	13.91	13.89	3
		25	0	13.88	13.92	13.90	3
5M	256QAM	1	0	11.82	11.95	11.95	5
		1	12	11.78	11.84	11.87	5
		1	24	11.92	11.82	11.74	5
		12	0	11.83	11.90	11.96	5
		12	6	11.74	11.84	11.79	5
		12	13	11.87	11.83	11.84	5
		25	0	11.82	11.84	11.80	5

LTE Conducted Power (Tablet Mode Reduction)							
LTE Band 14							
BW	MCS Index	RB Size	RB Offset		Mid		3GPP MPR (dB)
		Channel			23330		
		Frequency (MHz)			793		
10M	QPSK	1	0		17.46		0
		1	24		17.43		0
		1	49		17.41		0
		25	0		16.42		1
		25	12		16.39		1
		25	25		16.37		1
		50	0		16.38		1
10M	16QAM	1	0		16.44		1
		1	24		16.42		1
		1	49		16.38		1
		25	0		15.47		2
		25	12		15.44		2
		25	25		15.41		2
		50	0		15.43		2
10M	64QAM	1	0		15.45		2
		1	24		15.43		2
		1	49		15.41		2
		25	0		14.47		3
		25	12		14.45		3
		25	25		14.42		3
		50	0		14.43		3
10M	256QAM	1	0		12.46		5
		1	24		12.36		5
		1	49		12.34		5
		25	0		12.31		5
		25	12		12.24		5
		25	25		12.36		5
		50	0		12.26		5
BW	MCS Index	Channel		23305	23330	23355	3GPP MPR
		Frequency (MHz)		790.5	793	795.5	
5M	QPSK	1	0	17.35	17.38	17.31	0
		1	12	17.33	17.36	17.29	0
		1	24	17.31	17.34	17.27	0
		12	0	16.39	16.42	16.35	1
		12	6	16.38	16.41	16.34	1
		12	13	16.34	16.37	16.30	1
		25	0	16.36	16.39	16.32	1
5M	16QAM	1	0	16.41	16.44	16.37	1
		1	12	16.38	16.41	16.34	1
		1	24	16.34	16.37	16.30	1
		12	0	15.43	15.46	15.39	2
		12	6	15.41	15.44	15.37	2
		12	13	15.39	15.42	15.35	2
		25	0	15.40	15.43	15.36	2
5M	64QAM	1	0	15.44	15.47	15.40	2
		1	12	15.40	15.43	15.36	2
		1	24	15.38	15.41	15.34	2
		12	0	14.44	14.47	14.40	3
		12	6	14.41	14.44	14.37	3
		12	13	14.38	14.41	14.34	3
		25	0	14.34	14.37	14.30	3
5M	256QAM	1	0	12.39	12.39	12.41	5
		1	12	12.33	12.43	12.35	5
		1	24	12.31	12.33	12.35	5
		12	0	12.34	12.36	12.38	5
		12	6	12.23	12.28	12.27	5
		12	13	12.30	12.26	12.35	5
		25	0	12.32	12.28	12.23	5

LTE Conducted Power (Tablet Mode Reduction)							
LTE Band 17							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		23780	23790	23800	
		Frequency (MHz)		709	710	711	
10M	QPSK	1	0	16.95	16.98	16.96	0
		1	24	16.93	16.96	16.94	0
		1	49	16.90	16.93	16.91	0
		25	0	15.92	15.97	15.94	1
		25	12	15.92	15.95	15.93	1
		25	25	15.90	15.93	15.91	1
10M	16QAM	1	0	15.91	15.94	15.92	1
		1	24	15.89	15.92	15.90	1
		1	49	15.36	15.39	15.37	1
		25	0	14.93	14.96	14.94	2
		25	12	14.91	14.94	14.92	2
		25	25	14.89	14.92	14.90	2
10M	64QAM	1	0	14.93	14.96	14.94	2
		1	24	14.90	14.93	14.91	2
		1	49	14.88	14.91	14.89	2
		25	0	13.94	13.97	13.95	3
		25	12	13.92	13.95	13.93	3
		25	25	13.89	13.92	13.90	3
10M	256QAM	1	0	11.95	11.93	11.86	5
		1	24	11.84	11.91	11.91	5
		1	49	11.83	11.91	11.81	5
		25	0	11.84	11.96	11.89	5
		25	12	11.81	11.81	11.87	5
		25	25	11.82	11.80	11.90	5
BW	MCS Index	Channel		23755	23790	23825	3GPP MPR
		Frequency (MHz)		706.5	710	713.5	
5M	QPSK	1	0	16.95	16.94	16.94	0
		1	12	16.89	16.88	16.88	0
		1	24	16.84	16.91	16.86	0
		12	0	15.89	15.95	15.89	1
		12	6	15.92	15.88	15.87	1
		12	13	15.81	15.83	15.82	1
5M	16QAM	25	0	15.85	15.88	15.90	1
		1	0	15.81	15.86	15.88	1
		1	12	15.87	15.92	15.90	1
		1	24	15.35	15.39	15.36	1
		12	0	14.84	14.94	14.94	2
		12	6	14.85	14.91	14.88	2
5M	64QAM	12	13	14.86	14.83	14.86	2
		25	0	14.87	14.85	14.87	2
		1	0	14.85	14.92	14.88	2
		1	12	14.85	14.91	14.81	2
		1	24	14.85	14.84	14.85	2
		12	0	13.92	13.96	13.95	3
5M	256QAM	12	6	13.83	13.85	13.88	3
		12	13	13.86	13.90	13.85	3
		25	0	13.83	13.84	13.84	3
		1	0	11.83	11.91	11.84	5
		1	12	11.80	11.80	11.91	5
		1	24	11.84	11.89	11.81	5
5M	256QAM	12	0	11.83	11.84	11.79	5
		12	6	11.70	11.82	11.78	5
		12	13	11.87	11.86	11.86	5
		25	0	11.81	11.84	11.80	5

LTE Conducted Power (Tablet Mode Reduction)									
LTE Band 25									
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)		
		Channel		26140	26365	26590			
		Frequency (MHz)		1860	1882.5	1905			
20M	QPSK	1	0	13.96	13.97	13.94	0		
		1	50	13.93	13.94	13.91	0		
		1	99	13.91	13.92	13.89	0		
		50	0	12.93	12.96	12.91	1		
		50	25	12.92	12.93	12.90	1		
		50	50	12.90	12.91	12.88	1		
20M	16QAM	100	0	12.91	12.93	12.88	1		
		1	0	12.95	12.96	12.93	1		
		1	50	12.93	12.94	12.91	1		
		1	99	12.90	12.91	12.88	1		
		50	0	11.96	11.97	11.94	2		
		50	25	11.94	11.95	11.92	2		
20M	64QAM	50	50	11.92	11.93	11.90	2		
		100	0	11.93	11.94	11.91	2		
		1	0	11.94	11.95	11.92	2		
		1	50	11.90	11.91	11.88	2		
		1	99	11.88	11.89	11.86	2		
		50	0	10.96	10.97	10.94	3		
20M	256QAM	50	25	10.94	10.95	10.92	3		
		50	50	10.91	10.92	10.89	3		
		100	0	10.92	10.93	10.90	3		
		1	0	8.94	8.88	8.89	5		
		1	50	8.86	8.93	8.81	5		
		1	99	8.87	8.83	8.82	5		
20M	256QAM	50	0	8.78	8.86	8.77	5		
		50	25	8.79	8.87	8.77	5		
		50	50	8.87	8.82	8.79	5		
20M	256QAM	100	0	8.91	8.88	8.93	5		
		BW	MCS Index	Channel		26115	26365	26615	3GPP MPR
				Frequency (MHz)		1857.5	1882.5	1907.5	
15M	QPSK	1	0	13.89	13.96	13.89	0		
		1	37	13.84	13.84	13.88	0		
		1	74	13.83	13.91	13.85	0		
		36	0	12.95	12.90	12.90	1		
		36	19	12.83	12.87	12.81	1		
		36	39	12.82	12.84	12.88	1		
15M	16QAM	75	0	12.82	12.93	12.88	1		
		1	0	12.87	12.92	12.86	1		
		1	37	12.90	12.88	12.88	1		
		1	74	12.83	12.83	12.87	1		
		36	0	11.90	11.95	11.87	2		
		36	19	11.93	11.88	11.82	2		
15M	64QAM	36	39	11.84	11.86	11.80	2		
		75	0	11.83	11.90	11.81	2		
		1	0	11.90	11.91	11.91	2		
		1	37	11.82	11.84	11.84	2		
		1	74	11.83	11.80	11.83	2		
		36	0	10.90	10.92	10.88	3		
15M	256QAM	36	19	10.88	10.90	10.83	3		
		36	39	10.84	10.86	10.80	3		
		75	0	10.89	10.84	10.85	3		
		1	0	8.90	8.92	8.86	5		
		1	37	8.88	8.86	8.84	5		
		1	74	8.85	8.84	8.86	5		
15M	256QAM	36	0	8.86	8.89	8.76	5		
		36	19	8.89	8.84	8.87	5		
		36	39	8.88	8.87	8.74	5		
		75	0	8.83	8.84	8.94	5		

LTE Conducted Power (Tablet Mode Reduction)									
LTE Band 25									
BW	MCS Index	Channel		26090	26365	26640	3GPP MPR		
		Frequency (MHz)		1855	1882.5	1910			
10M	QPSK	1	0	13.87	13.87	13.73	0		
		1	24	13.93	13.73	13.81	0		
		1	49	13.68	13.82	13.83	0		
		25	0	12.86	12.80	12.81	1		
		25	12	12.79	12.72	12.68	1		
		25	25	12.69	12.70	12.78	1		
10M	16QAM	50	0	12.82	12.82	12.87	1		
		1	0	12.93	12.90	12.76	1		
		1	24	12.74	12.84	12.81	1		
		1	49	12.76	12.89	12.82	1		
		25	0	11.82	11.89	11.78	2		
		25	12	11.91	11.79	11.77	2		
10M	64QAM	25	25	11.79	11.83	11.83	2		
		50	0	11.82	11.75	11.76	2		
		1	0	11.81	11.81	11.72	2		
		1	24	11.77	11.90	11.75	2		
		1	49	11.82	11.75	11.83	2		
		25	0	10.91	10.91	10.71	3		
10M	256QAM	25	12	10.78	10.83	10.82	3		
		25	25	10.85	10.90	10.81	3		
		50	0	10.82	10.88	10.71	3		
		1	0	8.96	8.95	8.94	5		
		1	24	8.92	8.86	8.91	5		
		1	49	8.90	8.92	8.79	5		
10M	256QAM	25	0	8.78	8.88	8.79	5		
		25	12	8.85	8.80	8.77	5		
		25	25	8.85	8.81	8.71	5		
		50	0	8.83	8.90	8.85	5		
		BW	MCS Index	Channel		26065	26365	26665	3GPP MPR
				Frequency (MHz)		1852.5	1882.5	1912.5	
5M	QPSK	1	0	13.89	13.79	13.76	0		
		1	12	13.86	13.87	13.78	0		
		1	24	13.73	13.85	13.68	0		
		12	0	12.84	12.79	12.64	1		
		12	6	12.82	12.76	12.77	1		
		12	13	12.83	12.75	12.58	1		
5M	16QAM	25	0	12.83	12.75	12.68	1		
		1	0	12.84	12.88	12.76	1		
		1	12	12.78	12.79	12.83	1		
		1	24	12.73	12.81	12.78	1		
		12	0	11.93	11.85	11.81	2		
		12	6	11.81	11.92	11.72	2		
5M	64QAM	12	13	11.74	11.83	11.66	2		
		25	0	11.83	11.86	11.78	2		
		1	0	11.87	11.71	11.86	2		
		1	12	11.73	11.73	11.83	2		
		1	24	11.79	11.73	11.80	2		
		12	0	10.83	10.82	10.72	3		
5M	256QAM	12	6	10.92	10.83	10.69	3		
		12	13	10.85	10.80	10.69	3		
		25	0	10.70	10.86	10.82	3		
		1	0	8.93	8.97	8.89	5		
		1	12	8.93	8.86	8.83	5		
		1	24	8.84	8.84	8.89	5		
5M	256QAM	12	0	8.86	8.85	8.86	5		
		12	6	8.89	8.79	8.84	5		
		12	13	8.83	8.84	8.76	5		
		25	0	8.84	8.88	8.85	5		

LTE Conducted Power (Tablet Mode Reduction)									
LTE Band 25									
BW	MCS Index	Channel		26055	26365	26675	3GPP MPR		
		Frequency (MHz)		1851.5	1882.5	1913.5			
3M	QPSK	1	0	13.85	13.80	13.72	0		
		1	7	13.87	13.73	13.83	0		
		1	14	13.79	13.86	13.74	0		
		8	0	12.93	12.72	12.82	1		
		8	3	12.84	12.77	12.90	1		
		8	7	12.75	12.86	12.69	1		
3M	16QAM	15	0	12.89	12.83	12.78	1		
		1	0	12.82	12.93	12.89	1		
		1	7	12.84	12.84	12.76	1		
		1	14	12.77	12.67	12.82	1		
		8	0	11.87	11.77	11.82	2		
		8	3	11.78	11.76	11.79	2		
3M	64QAM	8	7	11.74	11.83	11.83	2		
		15	0	11.79	11.88	11.83	2		
		1	0	11.85	11.72	11.74	2		
		1	7	11.75	11.85	11.68	2		
		1	14	11.81	11.80	11.78	2		
		8	0	10.83	10.82	10.85	3		
3M	256QAM	8	3	10.72	10.76	10.81	3		
		8	7	10.79	10.83	10.82	3		
		15	0	10.78	10.88	10.68	3		
		1	0	11.89	11.89	11.92	2		
		1	7	11.86	11.87	11.82	2		
		1	14	11.90	11.85	11.82	2		
3M	256QAM	8	0	10.83	10.84	10.84	3		
		8	3	10.89	10.81	10.79	3		
		8	7	10.83	10.86	10.72	3		
		15	0	10.91	10.90	10.90	3		
		BW	MCS Index	Channel		26047	26365	26683	3GPP MPR
				Frequency (MHz)		1850.7	1882.5	1914.3	
1.4M	QPSK	1	0	13.85	13.95	13.84	0		
		1	2	13.86	13.87	13.74	0		
		1	5	13.75	13.83	13.77	0		
		3	0	13.86	13.77	13.73	0		
		3	1	13.79	13.74	13.83	0		
		3	3	13.84	13.66	13.73	0		
1.4M	16QAM	6	0	12.69	12.87	12.82	1		
		1	0	12.92	12.88	12.74	1		
		1	2	12.74	12.70	12.77	1		
		1	5	12.68	12.77	12.68	1		
		3	0	12.86	12.87	12.78	1		
		3	1	12.80	12.88	12.71	1		
1.4M	64QAM	3	3	12.84	12.82	12.82	1		
		6	0	11.84	11.81	11.81	2		
		1	0	11.76	11.76	11.72	2		
		1	2	11.80	11.82	11.74	2		
		1	5	11.78	11.76	11.75	2		
		3	0	11.90	11.86	11.74	2		
1.4M	256QAM	3	1	11.83	11.76	11.89	2		
		3	3	11.78	11.82	11.67	2		
		6	0	10.88	10.76	10.73	3		
		1	0	8.89	8.94	8.89	5		
		1	2	8.86	8.85	8.85	5		
		1	5	8.86	8.89	8.84	5		
1.4M	256QAM	3	0	8.82	8.92	8.79	5		
		3	1	8.84	8.77	8.78	5		
		3	3	8.89	8.80	8.77	5		
		6	0	8.84	8.85	8.87	5		

LTE Conducted Power (Tablet Mode Reduction)							
LTE Band 26							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		26765	26865	26965	
		Frequency (MHz)		821.5	831.5	841.5	
15M	QPSK	1	0	17.97	17.99	17.95	0
		1	37	17.93	17.95	17.91	0
		1	74	17.90	17.92	17.88	0
		36	0	16.96	16.98	16.94	1
		36	19	16.92	16.94	16.90	1
		36	39	16.90	16.92	16.88	1
		75	0	16.92	16.94	16.89	1
15M	16QAM	1	0	16.93	16.95	16.91	1
		1	37	16.91	16.93	16.89	1
		1	74	16.89	16.91	16.87	1
		36	0	15.95	15.97	15.93	2
		36	19	15.93	15.95	15.91	2
		36	39	15.90	15.92	15.88	2
		75	0	15.94	15.96	15.92	2
15M	64QAM	1	0	15.90	15.92	15.88	2
		1	37	15.87	15.89	15.85	2
		1	74	15.85	15.87	15.83	2
		36	0	14.94	14.96	14.92	3
		36	19	14.92	14.94	14.90	3
		36	39	14.90	14.92	14.88	3
		75	0	14.89	14.91	14.87	3
15M	256QAM	1	0	12.94	12.92	12.92	5
		1	37	12.83	12.89	12.86	5
		1	74	12.86	12.83	12.85	5
		36	0	12.83	12.87	12.82	5
		36	19	12.78	12.92	12.81	5
		36	39	12.84	12.80	12.81	5
		75	0	12.89	12.92	12.76	5
BW	MCS Index	Channel		26740	26865	26990	3GPP MPR
		Frequency (MHz)		819	831.5	844	
10M	QPSK	1	0	17.94	17.90	17.94	0
		1	24	17.83	17.86	17.84	0
		1	49	17.83	17.88	17.88	0
		25	0	16.93	16.95	16.91	1
		25	12	16.84	16.93	16.85	1
		25	25	16.80	16.92	16.78	1
		50	0	16.87	16.87	16.85	1
10M	16QAM	1	0	16.91	16.93	16.86	1
		1	24	16.82	16.88	16.79	1
		1	49	16.88	16.87	16.79	1
		25	0	15.87	15.96	15.88	2
		25	12	15.89	15.88	15.84	2
		25	25	15.86	15.86	15.80	2
		50	0	15.86	15.87	15.84	2
10M	64QAM	1	0	15.85	15.84	15.87	2
		1	24	15.81	15.83	15.80	2
		1	49	15.78	15.86	15.74	2
		25	0	14.85	14.89	14.88	3
		25	12	14.92	14.90	14.81	3
		25	25	14.86	14.89	14.84	3
		50	0	14.80	14.87	14.84	3
10M	256QAM	1	0	12.88	12.87	12.75	5
		1	24	12.88	12.80	12.78	5
		1	49	12.82	12.74	12.75	5
		25	0	12.72	12.76	12.85	5
		25	12	12.80	12.69	12.82	5
		25	25	12.73	12.79	12.77	5
		50	0	12.84	12.69	12.77	5

LTE Conducted Power (Tablet Mode Reduction)									
LTE Band 26									
BW	MCS Index	Channel		26715	26865	27015	3GPP MPR		
		Frequency (MHz)		816.5	831.5	846.5			
5M	QPSK	1	0	17.88	17.77	17.86	0		
		1	12	17.78	17.83	17.72	0		
		1	24	17.73	17.89	17.81	0		
		12	0	16.86	16.83	16.73	1		
		12	6	16.82	16.81	16.88	1		
		12	13	16.83	16.76	16.85	1		
5M	16QAM	25	0	16.68	16.83	16.76	1		
		1	0	16.75	16.74	16.85	1		
		1	12	16.72	16.72	16.70	1		
		1	24	16.71	16.80	16.73	1		
		12	0	15.89	15.89	15.85	2		
		12	6	15.80	15.74	15.80	2		
5M	64QAM	12	13	15.80	15.69	15.73	2		
		25	0	15.78	15.86	15.87	2		
		1	0	15.77	15.75	15.74	2		
		1	12	15.83	15.82	15.80	2		
		1	24	15.71	15.68	15.60	2		
		12	0	14.78	14.91	14.84	3		
5M	256QAM	12	6	14.77	14.79	14.73	3		
		12	13	14.71	14.81	14.77	3		
		25	0	14.81	14.76	14.78	3		
		1	0	12.97	12.90	12.85	5		
		1	12	12.82	12.79	12.75	5		
		1	24	12.86	12.90	12.80	5		
5M	256QAM	12	0	12.73	12.88	12.81	5		
		12	6	12.77	12.87	12.85	5		
		12	13	12.87	12.76	12.85	5		
		25	0	12.87	12.86	12.80	5		
		BW	MCS Index	Channel		26705	26865	27025	3GPP MPR
				Frequency (MHz)		815.5	831.5	847.5	
3M	QPSK	1	0	17.80	17.76	17.67	0		
		1	7	17.82	17.85	17.74	0		
		1	14	17.75	17.80	17.80	0		
		8	0	16.89	16.81	16.60	1		
		8	3	16.83	16.89	16.68	1		
		8	7	16.78	16.73	16.70	1		
3M	16QAM	15	0	16.80	16.85	16.72	1		
		1	0	16.78	16.94	16.80	1		
		1	7	16.83	16.68	16.77	1		
		1	14	16.83	16.85	16.70	1		
		8	0	15.81	15.86	15.75	2		
		8	3	15.79	15.90	15.83	2		
3M	64QAM	8	7	15.75	15.71	15.67	2		
		15	0	15.79	15.84	15.82	2		
		1	0	15.75	15.86	15.75	2		
		1	7	15.74	15.83	15.75	2		
		1	14	15.75	15.73	15.77	2		
		8	0	14.89	14.86	14.76	3		
3M	256QAM	8	3	14.74	14.89	14.79	3		
		8	7	14.86	14.84	14.73	3		
		15	0	14.87	14.85	14.78	3		
		1	0	12.92	12.89	12.89	5		
		1	7	12.81	12.81	12.76	5		
		1	14	12.78	12.81	12.75	5		
3M	256QAM	8	0	12.82	12.81	12.74	5		
		8	3	12.78	12.91	12.72	5		
		8	7	12.76	12.75	12.79	5		
		15	0	12.86	12.84	12.70	5		

LTE Conducted Power (Tablet Mode Reduction)							
LTE Band 26							
BW	MCS Index	Channel		26697	26865	27033	3GPP MPR
		Frequency (MHz)		814.7	831.5	848.3	
1.4M	QPSK	1	0	17.90	17.85	17.94	0
		1	2	17.75	17.76	17.74	0
		1	5	17.72	17.89	17.80	0
		3	0	16.87	16.77	16.83	0
		3	1	16.71	16.77	16.80	0
		3	3	16.83	16.79	16.79	0
		6	0	16.80	16.73	16.73	1
1.4M	16QAM	1	0	16.71	16.76	16.84	1
		1	2	16.73	16.72	16.75	1
		1	5	16.76	16.73	16.67	1
		3	0	15.80	15.87	15.83	1
		3	1	15.82	15.90	15.79	1
		3	3	15.78	15.75	15.80	1
1.4M	64QAM	6	0	15.81	15.74	15.83	2
		1	0	15.75	15.71	15.70	2
		1	2	15.71	15.71	15.78	2
		1	5	15.75	15.83	15.67	2
		3	0	14.91	14.79	14.82	2
		3	1	14.86	14.83	14.81	2
1.4M	256QAM	3	3	14.75	14.86	14.76	2
		6	0	14.73	14.73	14.84	3
		1	0	12.84	12.91	12.89	5
		1	2	12.81	12.85	12.79	5
		1	5	12.80	12.78	12.85	5
		3	0	12.79	12.84	12.73	5
1.4M	256QAM	3	1	12.71	12.92	12.74	5
		3	3	12.83	12.76	12.80	5
		6	0	12.84	12.85	12.70	5
		6	0	12.84	12.85	12.70	5

LTE Conducted Power (Tablet Mode Reduction)							
LTE Band 30							
BW	MCS Index	RB Size	RB Offset		Mid		3GPP MPR (dB)
		Channel			27710		
		Frequency (MHz)			2310		
10M	QPSK	1	0		12.96		0
		1	24		12.93		0
		1	49		12.91		0
		25	0		11.94		1
		25	12		11.91		1
		25	25		11.89		1
		50	0		11.92		1
10M	16QAM	1	0		11.87		1
		1	24		11.85		1
		1	49		11.86		1
		25	0		10.96		2
		25	12		10.93		2
		25	25		10.91		2
		50	0		10.94		2
10M	64QAM	1	0		10.91		2
		1	24		10.89		2
		1	49		10.91		2
		25	0		9.97		3
		25	12		9.95		3
		25	25		9.92		3
		50	0		9.93		3
10M	256QAM	1	0		7.92		5
		1	24		7.90		5
		1	49		7.83		5
		25	0		7.78		5
		25	12		7.80		5
		25	25		7.79		5
		50	0		7.89		5
BW	MCS Index	Channel		27685	27710	27735	3GPP MPR
		Frequency (MHz)		2307.5	2310	2312.5	
5M	QPSK	1	0	12.91	12.94	12.89	0
		1	12	12.88	12.91	12.86	0
		1	24	12.85	12.88	12.83	0
		12	0	11.93	11.96	11.91	1
		12	6	11.90	11.93	11.88	1
		12	13	11.88	11.91	11.86	1
		25	0	11.86	11.89	11.84	1
5M	16QAM	1	0	11.92	11.95	11.90	1
		1	12	11.89	11.92	11.87	1
		1	24	11.84	11.87	11.82	1
		12	0	10.93	10.96	10.91	2
		12	6	10.91	10.94	10.89	2
		12	13	10.89	10.92	10.87	2
		25	0	10.85	10.88	10.83	2
5M	64QAM	1	0	10.82	10.85	10.80	2
		1	12	10.80	10.83	10.78	2
		1	24	10.78	10.81	10.76	2
		12	0	9.95	9.98	9.93	3
		12	6	9.93	9.96	9.91	3
		12	13	9.91	9.94	9.89	3
		25	0	9.92	9.95	9.90	3
5M	256QAM	1	0	7.74	7.81	7.91	5
		1	12	7.87	7.83	7.84	5
		1	24	7.78	7.76	7.86	5
		12	0	7.83	7.80	7.77	5
		12	6	7.68	7.68	7.69	5
		12	13	7.74	7.71	7.88	5
		25	0	7.77	7.74	7.86	5

LTE Conducted Power (Tablet Mode Reduction)							
LTE Band 38							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		37850	38000	38150	
		Frequency (MHz)		2580	2595	2610	
20M	QPSK	1	0	13.91	13.95	13.97	0
		1	50	13.88	13.91	13.94	0
		1	99	13.87	13.90	13.93	0
		50	0	12.91	12.94	12.96	1
		50	25	12.89	12.92	12.95	1
		50	50	12.86	12.89	12.92	1
		100	0	12.85	12.88	12.91	1
20M	16QAM	1	0	12.92	12.95	12.98	1
		1	50	12.89	12.92	12.95	1
		1	99	12.88	12.91	12.94	1
		50	0	11.91	11.94	11.97	2
		50	25	11.90	11.93	11.96	2
		50	50	11.88	11.91	11.94	2
		100	0	11.85	11.88	11.91	2
20M	64QAM	1	0	11.86	11.89	11.92	2
		1	50	11.84	11.87	11.90	2
		1	99	11.83	11.86	11.89	2
		50	0	10.91	10.94	10.97	3
		50	25	10.89	10.92	10.95	3
		50	50	10.88	10.91	10.94	3
		100	0	10.86	10.89	10.92	3
20M	256QAM	1	0	8.90	8.93	8.96	5
		1	50	8.85	8.88	8.91	5
		1	99	8.85	8.88	8.91	5
		50	0	8.79	8.82	8.85	5
		50	25	8.82	8.85	8.88	5
		50	50	8.79	8.82	8.85	5
		100	0	8.84	8.87	8.90	5
BW	MCS Index	Channel		37825	38000	38175	3GPP MPR
		Frequency (MHz)		2577.5	2595	2612.5	
15M	QPSK	1	0	13.89	13.91	13.88	0
		1	37	13.83	13.84	13.89	0
		1	74	13.83	13.80	13.84	0
		36	0	12.85	12.91	12.89	1
		36	19	12.84	12.89	12.92	1
		36	39	12.81	12.85	12.82	1
		75	0	12.76	12.88	12.87	1
15M	16QAM	1	0	12.83	12.94	12.97	1
		1	37	12.84	12.84	12.88	1
		1	74	12.88	12.82	12.91	1
		36	0	11.90	11.90	11.90	2
		36	19	11.89	11.92	11.91	2
		36	39	11.80	11.85	11.94	2
		75	0	11.85	11.88	11.85	2
15M	64QAM	1	0	11.76	11.87	11.87	2
		1	37	11.78	11.86	11.84	2
		1	74	11.80	11.77	11.85	2
		36	0	10.82	10.84	10.93	3
		36	19	10.81	10.89	10.87	3
		36	39	10.86	10.87	10.87	3
		75	0	10.84	10.83	10.88	3
15M	256QAM	1	0	8.87	8.86	8.92	5
		1	37	8.75	8.81	8.87	5
		1	74	8.76	8.86	8.88	5
		36	0	8.77	8.74	8.82	5
		36	19	8.82	8.80	8.78	5
		36	39	8.74	8.80	8.78	5
		75	0	8.84	8.77	8.89	5

LTE Conducted Power (Tablet Mode Reduction)									
LTE Band 38									
BW	MCS Index	Channel		37800	38000	38200	3GPP MPR		
		Frequency (MHz)		2575	2595	2615			
10M	QPSK	1	0	13.90	13.93	13.92	0		
		1	24	13.82	13.89	13.85	0		
		1	49	13.83	13.86	13.84	0		
		25	0	12.83	12.94	12.89	1		
		25	12	12.89	12.84	12.86	1		
		25	25	12.85	12.86	12.83	1		
10M	16QAM	50	0	12.78	12.83	12.86	1		
		1	0	12.84	12.93	12.97	1		
		1	24	12.87	12.91	12.89	1		
		1	49	12.83	12.81	12.87	1		
		25	0	11.83	11.87	11.89	2		
		25	12	11.83	11.90	11.91	2		
10M	64QAM	25	25	11.88	11.89	11.90	2		
		50	0	11.85	11.83	11.81	2		
		1	0	11.81	11.88	11.90	2		
		1	24	11.78	11.85	11.85	2		
		1	49	11.83	11.86	11.80	2		
		25	0	10.84	10.88	10.94	3		
10M	256QAM	25	12	10.88	10.86	10.86	3		
		25	25	10.86	10.89	10.89	3		
		50	0	10.78	10.83	10.91	3		
		1	0	8.81	8.82	8.85	5		
		1	24	8.71	8.76	8.82	5		
		1	49	8.66	8.78	8.75	5		
10M	256QAM	25	0	8.63	8.77	8.76	5		
		25	12	8.75	8.82	8.84	5		
		25	25	8.67	8.77	8.71	5		
		50	0	8.74	8.81	8.73	5		
		BW	MCS Index	Channel		37775	38000	38225	3GPP MPR
		Frequency (MHz)		2572.5	2595	2617.5			
5M	QPSK	1	0	13.87	13.93	13.92	0		
		1	12	13.87	13.82	13.90	0		
		1	24	13.78	13.83	13.86	0		
		12	0	12.82	12.94	12.90	1		
		12	6	12.85	12.83	12.93	1		
		12	13	12.77	12.82	12.89	1		
5M	16QAM	25	0	12.78	12.84	12.89	1		
		1	0	12.84	12.95	12.94	1		
		1	12	12.84	12.90	12.90	1		
		1	24	12.83	12.88	12.86	1		
		12	0	11.82	11.93	11.94	2		
		12	6	11.90	11.88	11.93	2		
5M	64QAM	12	13	11.84	11.82	11.87	2		
		25	0	11.78	11.82	11.87	2		
		1	0	11.84	11.85	11.92	2		
		1	12	11.83	11.80	11.82	2		
		1	24	11.77	11.80	11.80	2		
		12	0	10.86	10.91	10.90	3		
5M	256QAM	12	6	10.89	10.87	10.91	3		
		12	13	10.86	10.89	10.94	3		
		25	0	10.77	10.86	10.85	3		
		1	0	8.79	8.82	8.89	5		
		1	12	8.68	8.73	8.78	5		
		1	24	8.72	8.79	8.73	5		
5M	256QAM	12	0	8.56	8.75	8.62	5		
		12	6	8.74	8.64	8.75	5		
		12	13	8.67	8.75	8.66	5		
		25	0	8.78	8.69	8.72	5		

LTE Conducted Power (Tablet Mode Reduction)							
LTE Band 40							
BW	MCS Index	RB Size	RB Offset	Low	Mid	Mid	3GPP MPR (dB)
		Channel		38750	39150	39550	
		Frequency (MHz)		2310	2350	2390	
20M	QPSK	1	0	14.87	14.96	14.86	0
		1	50	14.88	14.95	14.89	0
		1	99	14.91	14.88	14.83	0
		50	0	13.94	13.97	13.87	1
		50	25	13.87	13.93	13.81	1
		50	50	13.84	13.91	13.80	1
		100	0	13.91	13.85	13.78	1
20M	16QAM	1	0	13.87	13.89	13.82	1
		1	50	13.81	13.85	13.79	1
		1	99	13.89	13.88	13.80	1
		50	0	12.88	12.95	12.80	2
		50	25	12.84	12.93	12.74	2
		50	50	12.84	12.89	12.86	2
20M	64QAM	1	0	12.92	12.97	12.85	2
		1	50	12.85	12.94	12.84	2
		1	99	12.83	12.81	12.82	2
		50	0	11.90	11.89	11.87	3
		50	25	11.93	11.96	11.85	3
		50	50	11.85	11.86	11.77	3
20M	256QAM	1	0	9.79	9.86	9.76	5
		1	50	9.85	9.90	9.81	5
		1	99	9.89	9.80	9.81	5
		50	0	9.84	9.83	9.73	5
		50	25	9.70	9.84	9.73	5
		50	50	9.85	9.87	9.72	5
BW	MCS Index	Channel		38725	39150	39575	3GPP MPR
		Frequency (MHz)		2307.5	2350	2392.5	
		1	0	14.94	14.94	14.90	
15M	QPSK	1	37	14.93	14.87	14.90	0
		1	74	14.91	14.86	14.78	0
		36	0	13.91	13.92	13.80	1
		36	19	13.82	13.85	13.84	1
		36	39	13.83	13.94	13.78	1
		75	0	13.83	13.87	13.79	1
		15M	16QAM	1	0	13.88	13.89
1	37			13.82	13.90	13.79	1
1	74			13.89	13.90	13.75	1
36	0			12.89	12.92	12.83	2
36	19			12.88	12.88	12.79	2
36	39			12.86	12.89	12.86	2
15M	64QAM	75	0	12.89	12.94	12.72	2
		1	0	12.86	12.94	12.90	2
		1	37	12.84	12.89	12.80	2
		1	74	12.84	12.88	12.75	2
		36	0	11.96	11.99	11.90	3
		36	19	11.90	11.95	11.80	3
15M	256QAM	36	39	11.86	11.95	11.80	3
		75	0	11.85	11.96	11.75	3
		1	0	9.76	9.88	9.74	5
		1	37	9.86	9.83	9.73	5
		1	74	9.84	9.86	9.72	5
		36	0	9.64	9.83	9.72	5
15M	256QAM	36	19	9.88	9.71	9.72	5
		36	39	9.82	9.83	9.71	5
		75	0	9.69	9.81	9.75	5
		75	0	9.69	9.81	9.75	5

LTE Conducted Power (Tablet Mode Reduction)									
LTE Band 40									
BW	MCS Index	Channel		38700	39150	39600	3GPP MPR		
		Frequency (MHz)		2305	2350	2395			
10M	QPSK	1	0	14.87	14.89	14.89	0		
		1	24	14.81	14.92	14.79	0		
		1	49	14.81	14.91	14.77	0		
		25	0	13.74	13.83	13.91	1		
		25	12	13.79	13.80	13.77	1		
		25	25	13.80	13.74	13.84	1		
10M	16QAM	50	0	13.79	13.78	13.85	1		
		1	0	13.90	13.89	13.90	1		
		1	24	13.83	13.93	13.84	1		
		1	49	13.77	13.90	13.83	1		
		25	0	12.73	12.89	12.83	2		
		25	12	12.75	12.72	12.83	2		
10M	64QAM	25	25	12.80	12.73	12.87	2		
		50	0	12.76	12.80	12.81	2		
		1	0	12.91	12.87	12.93	2		
		1	24	12.79	12.90	12.78	2		
		1	49	12.79	12.91	12.83	2		
		25	0	11.79	11.83	11.82	3		
10M	256QAM	25	12	11.79	11.81	11.82	3		
		25	25	11.86	11.76	11.93	3		
		50	0	11.71	11.83	11.78	3		
		1	0	9.86	9.80	9.73	5		
		1	24	9.82	9.85	9.80	5		
		1	49	9.87	9.74	9.65	5		
10M	256QAM	25	0	9.78	9.83	9.75	5		
		25	12	9.77	9.76	9.73	5		
		25	25	9.73	9.72	9.63	5		
		50	0	9.80	9.85	9.74	5		
		BW	MCS Index	Channel		38675	39150	39625	3GPP MPR
		Frequency (MHz)		2302.5	2350	2397.5			
5M	QPSK	1	0	14.90	14.91	14.87	0		
		1	12	14.82	14.84	14.84	0		
		1	24	14.84	14.90	14.84	0		
		12	0	13.76	13.91	13.87	1		
		12	6	13.79	13.80	13.85	1		
		12	13	13.81	13.81	13.94	1		
5M	16QAM	25	0	13.80	13.80	13.78	1		
		1	0	13.85	13.89	13.87	1		
		1	12	13.84	13.85	13.86	1		
		1	24	13.76	13.81	13.81	1		
		12	0	12.81	12.84	12.87	2		
		12	6	12.78	12.73	12.80	2		
5M	64QAM	12	13	12.80	12.78	12.92	2		
		25	0	12.77	12.79	12.78	2		
		1	0	12.88	12.93	12.88	2		
		1	12	12.84	12.91	12.82	2		
		1	24	12.80	12.89	12.77	2		
		12	0	11.79	11.85	11.87	3		
5M	256QAM	12	6	11.78	11.75	11.76	3		
		12	13	11.86	11.83	11.84	3		
		25	0	11.74	11.77	11.82	3		
		1	0	9.80	9.88	9.80	5		
		1	12	9.81	9.93	9.79	5		
		1	24	9.84	9.79	9.83	5		
5M	256QAM	12	0	9.79	9.87	9.82	5		
		12	6	9.77	9.84	9.73	5		
		12	13	9.86	9.87	9.74	5		
		25	0	9.78	9.91	9.73	5		

LTE Conducted Power (Tablet Mode Reduction)											
LTE Band 41											
BW	MCS Index	RB Size	RB Offset	Low	Mid	Mid	Mid	High	3GPP MPR (dB)		
		Channel		39750	40185	40620	41055	41490			
		Frequency (MHz)		2506	2549.5	2593	2636.5	2680			
20M	QPSK	1	0	10.80	10.86	10.93	10.89	10.84	0		
		1	50	10.86	10.74	10.73	10.81	10.78	0		
		1	99	10.78	10.86	10.77	10.74	10.84	0		
		50	0	9.84	9.84	9.90	9.73	9.86	1		
		50	25	9.77	9.90	9.86	9.74	9.79	1		
		50	50	9.74	9.86	9.75	9.86	9.78	1		
20M	16QAM	100	0	9.86	9.77	9.87	9.87	9.85	1		
		1	0	9.82	9.80	9.79	9.73	9.73	1		
		1	50	9.87	9.82	9.83	9.85	9.74	1		
		1	99	9.88	9.74	9.82	9.79	9.88	1		
		50	0	8.77	8.76	8.74	8.88	8.72	2		
		50	25	8.74	8.81	8.87	8.73	8.81	2		
20M	64QAM	50	50	8.86	8.70	8.83	8.83	8.89	2		
		100	0	8.75	8.73	8.80	8.78	8.90	2		
		1	0	8.74	8.90	8.89	8.82	8.87	2		
		1	50	8.72	8.73	8.81	8.79	8.79	2		
		1	99	8.87	8.75	8.75	8.71	8.75	2		
		50	0	7.82	7.77	7.72	7.81	7.83	3		
20M	256QAM	50	25	7.72	7.88	7.70	7.89	7.79	3		
		50	50	7.75	7.73	7.87	7.74	7.83	3		
		100	0	7.72	7.75	7.86	7.71	7.71	3		
		1	0	5.75	5.71	5.78	5.76	5.82	5		
		1	50	5.72	5.89	5.78	5.78	5.83	5		
		1	99	5.88	5.87	5.76	5.88	5.81	5		
20M	256QAM	50	0	5.77	5.76	5.89	5.75	5.87	5		
		50	25	5.85	5.84	5.77	5.79	5.74	5		
		50	50	5.85	5.77	5.70	5.74	5.82	5		
		100	0	5.79	5.87	5.88	5.83	5.72	5		
		BW	MCS Index	Channel		39725	40173	40620	41068	41515	3GPP MPR
				Frequency (MHz)		2503.5	2548.3	2593	2637.8	2682.5	
15M	QPSK	1	0	10.74	10.75	10.81	10.86	10.90	0		
		1	37	10.71	10.75	10.90	10.85	10.85	0		
		1	74	10.73	10.85	10.73	10.85	10.76	0		
		36	0	9.87	9.82	9.70	9.78	9.84	1		
		36	19	9.81	9.87	9.74	9.75	9.73	1		
		36	39	9.81	9.77	9.72	9.72	9.72	1		
15M	16QAM	75	0	9.81	9.71	9.81	9.81	9.87	1		
		1	0	9.72	9.87	9.82	9.71	9.73	1		
		1	37	9.88	9.75	9.73	9.78	9.86	1		
		1	74	9.90	9.83	9.87	9.77	9.72	1		
		36	0	8.81	8.74	8.79	8.77	8.73	2		
		36	19	8.86	8.90	8.90	8.70	8.71	2		
15M	64QAM	36	39	8.80	8.75	8.74	8.90	8.86	2		
		75	0	8.89	8.76	8.80	8.73	8.80	2		
		1	0	8.76	8.88	8.74	8.82	8.82	2		
		1	37	8.86	8.73	8.87	8.84	8.73	2		
		1	74	8.85	8.89	8.90	8.71	8.90	2		
		36	0	7.78	7.83	7.79	7.78	7.79	3		
15M	256QAM	36	19	7.90	7.83	7.76	7.87	7.80	3		
		36	39	7.78	7.78	7.79	7.89	7.78	3		
		75	0	7.82	7.74	7.70	7.72	7.74	3		
		1	0	5.82	5.86	5.90	5.76	5.77	5		
		1	37	5.73	5.79	5.90	5.80	5.76	5		
		1	74	5.72	5.81	5.76	5.76	5.72	5		
15M	256QAM	36	0	5.88	5.87	5.84	5.90	5.74	5		
		36	19	5.73	5.79	5.87	5.73	5.78	5		
		36	39	5.90	5.76	5.87	5.86	5.79	5		
		75	0	5.82	5.80	5.80	5.87	5.75	5		

LTE Conducted Power (Tablet Mode Reduction)									
LTE Band 41									
BW	MCS Index	Channel		39700	40160	40620	41080	41540	3GPP MPR
		Frequency (MHz)		2501	2547	2593	2639	2685	
10M	QPSK	1	0	10.74	10.74	10.90	10.84	10.79	0
		1	24	10.75	10.78	10.88	10.86	10.87	0
		1	49	10.79	10.88	10.71	10.88	10.78	0
		25	0	9.74	9.77	9.77	9.77	9.83	1
		25	12	9.87	9.82	9.89	9.71	9.81	1
		25	25	9.87	9.70	9.76	9.74	9.82	1
10M	16QAM	50	0	9.80	9.79	9.88	9.70	9.86	1
		1	0	9.72	9.87	9.82	9.82	9.82	1
		1	24	9.81	9.83	9.79	9.80	9.88	1
		1	49	9.80	9.86	9.89	9.76	9.82	1
		25	0	8.90	8.76	8.71	8.83	8.70	2
		25	12	8.86	8.82	8.81	8.77	8.77	2
10M	64QAM	25	25	8.72	8.89	8.85	8.79	8.79	2
		50	0	8.90	8.82	8.87	8.71	8.80	2
		1	0	8.77	8.77	8.82	8.90	8.85	2
		1	24	8.74	8.86	8.86	8.84	8.81	2
		1	49	8.75	8.82	8.74	8.86	8.87	2
		25	0	7.77	7.82	7.90	7.88	7.89	3
10M	256QAM	25	12	7.89	7.82	7.73	7.73	7.78	3
		25	25	7.84	7.74	7.81	7.85	7.78	3
		50	0	7.71	7.89	7.72	7.71	7.85	3
		1	0	5.85	5.86	5.90	5.73	5.89	5
		1	24	5.78	5.90	5.75	5.83	5.85	5
		1	49	5.73	5.72	5.82	5.75	5.71	5
BW	MCS Index	Channel		39675	40148	40620	41093	41565	3GPP MPR
		Frequency (MHz)		2498.5	2545.8	2593	2640.3	2687.5	
5M	QPSK	25	0	5.75	5.86	5.77	5.86	5.72	5
		50	0	5.84	5.73	5.71	5.76	5.79	5
		1	0	10.80	10.86	10.88	10.74	10.80	0
		1	12	10.85	10.87	10.85	10.89	10.76	0
		1	24	10.79	10.81	10.84	10.73	10.74	0
		12	0	9.75	9.80	9.86	9.78	9.86	1
5M	16QAM	12	6	9.84	9.89	9.82	9.71	9.78	1
		12	13	9.83	9.80	9.80	9.70	9.74	1
		25	0	9.80	9.84	9.80	9.72	9.88	1
		1	0	9.73	9.85	9.74	9.71	9.71	1
		1	12	9.85	9.78	9.80	9.73	9.77	1
		1	24	9.71	9.76	9.80	9.83	9.79	1
5M	64QAM	12	0	8.82	8.72	8.71	8.78	8.72	2
		12	6	8.80	8.73	8.80	8.85	8.86	2
		12	13	8.88	8.79	8.74	8.71	8.83	2
		25	0	8.70	8.72	8.86	8.76	8.80	2
		1	0	8.75	8.77	8.75	8.83	8.76	2
		1	12	8.77	8.90	8.81	8.76	8.88	2
5M	256QAM	1	24	8.79	8.84	8.70	8.75	8.83	2
		12	0	7.83	7.78	7.76	7.81	7.81	3
		12	6	7.82	7.78	7.87	7.80	7.77	3
		12	13	7.75	7.81	7.87	7.85	7.71	3
		25	0	7.74	7.87	7.78	7.82	7.75	3
		1	0	5.77	5.83	5.75	5.80	5.84	5
5M	256QAM	1	12	5.75	5.85	5.74	5.88	5.70	5
		1	24	5.89	5.80	5.76	5.81	5.70	5
		12	0	5.83	5.81	5.74	5.84	5.83	5
		12	6	5.77	5.71	5.84	5.77	5.72	5
		12	13	5.88	5.71	5.85	5.75	5.72	5
		25	0	5.79	5.72	5.79	5.74	5.71	5

LTE Conducted Power (Tablet Mode Reduction)										
LTE Band 48										
BW	MCS Index	RB Size	RB Offset	Low	Mid	Mid	Mid	3GPP MPR (dB)		
		Channel		55340	55780	56210	56640			
		Frequency (MHz)		3560	3603	3647	3690			
20M	QPSK	1	0	11.71	11.78	11.75	11.87	0		
		1	50	11.70	11.74	11.73	11.83	0		
		1	99	11.69	11.72	11.70	11.72	0		
		50	0	10.77	10.81	10.70	10.88	1		
		50	25	10.75	10.75	10.79	10.70	1		
		50	50	10.83	10.87	10.83	10.85	1		
20M	16QAM	100	0	10.88	10.77	10.83	10.75	1		
		1	0	10.90	10.78	10.78	10.90	1		
		1	50	10.83	10.74	10.84	10.89	1		
		1	99	10.78	10.87	10.74	10.85	1		
		50	0	9.72	9.76	9.76	9.78	2		
		50	25	9.90	9.85	9.70	9.90	2		
20M	64QAM	50	50	9.79	9.82	9.71	9.72	2		
		100	0	9.84	9.89	9.83	9.83	2		
		1	0	9.72	9.70	9.76	9.74	2		
		1	50	9.89	9.84	9.76	9.73	2		
		1	99	9.83	9.86	9.73	9.90	2		
		50	0	8.81	8.85	8.90	8.74	3		
20M	256QAM	50	25	8.82	8.70	8.83	8.72	3		
		50	50	8.76	8.75	8.80	8.78	3		
		100	0	8.88	8.89	8.86	8.70	3		
		1	0	6.78	6.87	6.87	6.82	5		
		1	50	6.73	6.76	6.85	6.81	5		
		1	99	6.72	6.87	6.70	6.80	5		
20M	256QAM	50	0	6.89	6.72	6.74	6.89	5		
		50	25	6.82	6.86	6.78	6.90	5		
		50	50	6.87	6.81	6.81	6.78	5		
		100	0	6.84	6.70	6.87	6.73	5		
		BW	MCS Index	Channel		55315	55765	56215	56665	3GPP MPR
		Frequency (MHz)		3557.5	3602.5	3647.5	3692.5			
15M	QPSK	1	0	11.80	11.78	11.80	11.81	0		
		1	37	11.79	11.84	11.81	11.86	0		
		1	74	11.79	11.84	11.76	11.78	0		
		36	0	10.77	10.74	10.79	10.83	1		
		36	19	10.84	10.83	10.70	10.82	1		
		36	39	10.70	10.81	10.88	10.76	1		
15M	16QAM	75	0	10.82	10.86	10.86	10.90	1		
		1	0	10.79	10.83	10.86	10.77	1		
		1	37	10.79	10.72	10.88	10.70	1		
		1	74	10.70	10.88	10.71	10.88	1		
		36	0	9.85	9.89	9.90	9.81	2		
		36	19	9.85	9.79	9.74	9.78	2		
15M	64QAM	36	39	9.71	9.81	9.84	9.73	2		
		75	0	9.72	9.87	9.82	9.82	2		
		1	0	9.84	9.74	9.73	9.73	2		
		1	37	9.75	9.82	9.79	9.84	2		
		1	74	9.82	9.89	9.84	9.80	2		
		36	0	8.82	8.82	8.73	8.84	3		
15M	256QAM	36	19	8.82	8.86	8.79	8.88	3		
		36	39	8.79	8.76	8.82	8.77	3		
		75	0	8.76	8.90	8.82	8.86	3		
		1	0	6.83	6.70	6.83	6.83	5		
		1	37	6.70	6.88	6.82	6.79	5		
		1	74	6.77	6.81	6.89	6.81	5		
15M	256QAM	36	0	6.77	6.82	6.84	6.88	5		
		36	19	6.73	6.73	6.73	6.78	5		
		36	39	6.87	6.74	6.86	6.75	5		
		75	0	6.79	6.86	6.88	6.80	5		

LTE Conducted Power (Tablet Mode Reduction)										
LTE Band 48										
BW	MCS Index	Channel		55290	55750	56220	56690	3GPP MPR		
		Frequency (MHz)		3555	3601	3648	3695			
10M	QPSK	1	0	11.82	11.86	11.82	11.84	0		
		1	24	11.74	11.71	11.71	11.82	0		
		1	49	11.71	11.75	11.70	11.75	0		
		25	0	10.89	10.70	10.70	10.70	1		
		25	12	10.76	10.75	10.89	10.71	1		
		25	25	10.75	10.75	10.83	10.84	1		
10M	16QAM	50	0	10.88	10.71	10.78	10.82	1		
		1	0	10.78	10.86	10.85	10.81	1		
		1	24	10.74	10.78	10.73	10.76	1		
		1	49	10.83	10.86	10.76	10.89	1		
		25	0	9.86	9.73	9.89	9.78	2		
		25	12	9.71	9.82	9.81	9.87	2		
10M	64QAM	25	25	9.89	9.80	9.83	9.76	2		
		50	0	9.79	9.79	9.85	9.74	2		
		1	0	9.75	9.71	9.89	9.76	2		
		1	24	9.79	9.84	9.82	9.87	2		
		1	49	9.88	9.70	9.77	9.79	2		
		25	0	8.78	8.76	8.80	8.85	3		
10M	256QAM	25	12	8.77	8.72	8.82	8.71	3		
		25	25	8.81	8.81	8.72	8.78	3		
		50	0	8.87	8.75	8.76	8.88	3		
		1	0	6.72	6.80	6.86	6.79	5		
		1	24	6.74	6.78	6.90	6.75	5		
		1	49	6.81	6.76	6.85	6.82	5		
10M	256QAM	25	0	6.90	6.75	6.87	6.77	5		
		25	12	6.85	6.75	6.74	6.81	5		
		25	25	6.79	6.70	6.82	6.75	5		
		50	0	6.79	6.87	6.77	6.70	5		
		BW	MCS Index	Channel		55265	55745	56235	56715	3GPP MPR
				Frequency (MHz)		3552.5	3600.5	3649.5	3697.5	
5M	QPSK	1	0	11.83	11.83	11.78	11.72	0		
		1	12	11.81	11.82	11.86	11.72	0		
		1	24	11.73	11.73	11.80	11.69	0		
		12	0	10.83	10.74	10.84	10.85	1		
		12	6	10.75	10.86	10.70	10.77	1		
		12	13	10.85	10.88	10.90	10.70	1		
5M	16QAM	25	0	10.90	10.78	10.79	10.76	1		
		1	0	10.87	10.85	10.87	10.86	1		
		1	12	10.77	10.71	10.88	10.82	1		
		1	24	10.74	10.85	10.83	10.83	1		
		12	0	9.84	9.77	9.87	9.90	2		
		12	6	9.89	9.78	9.76	9.71	2		
5M	64QAM	12	13	9.88	9.73	9.82	9.80	2		
		25	0	9.89	9.77	9.72	9.85	2		
		1	0	9.78	9.85	9.90	9.88	2		
		1	12	9.86	9.72	9.72	9.87	2		
		1	24	9.78	9.86	9.83	9.75	2		
		12	0	8.86	8.81	8.70	8.73	3		
5M	256QAM	12	6	8.89	8.72	8.74	8.87	3		
		12	13	8.88	8.85	8.86	8.81	3		
		25	0	8.87	8.76	8.87	8.90	3		
		1	0	6.70	6.74	6.76	6.84	5		
		1	12	6.86	6.90	6.83	6.77	5		
		1	24	6.83	6.74	6.86	6.78	5		
5M	256QAM	12	0	6.85	6.76	6.71	6.85	5		
		12	6	6.74	6.85	6.73	6.80	5		
		12	13	6.78	6.74	6.87	6.84	5		
		25	0	6.90	6.84	6.88	6.82	5		

LTE Conducted Power (Tablet Mode Reduction)							
LTE Band 66							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		132072	132322	132572	
		Frequency (MHz)		1720	1745	1770	
20M	QPSK	1	0	14.93	14.98	14.95	0
		1	50	14.91	14.96	14.93	0
		1	99	14.89	14.94	14.91	0
		50	0	13.92	13.97	13.94	1
		50	25	13.90	13.95	13.92	1
		50	50	13.89	13.94	13.91	1
		100	0	13.89	13.94	13.92	1
20M	16QAM	1	0	13.92	13.97	13.94	1
		1	50	13.89	13.94	13.91	1
		1	99	13.87	13.92	13.89	1
		50	0	12.93	12.98	12.95	2
		50	25	12.90	12.95	12.92	2
		50	50	12.86	12.91	12.88	2
		100	0	12.89	12.94	12.91	2
20M	64QAM	1	0	12.92	12.97	12.94	2
		1	50	12.89	12.94	12.91	2
		1	99	12.85	12.90	12.87	2
		50	0	11.94	11.99	11.96	3
		50	25	11.91	11.96	11.93	3
		50	50	11.90	11.95	11.92	3
		100	0	11.92	11.97	11.94	3
20M	256QAM	1	0	9.74	9.76	9.88	5
		1	50	9.72	9.64	9.79	5
		1	99	9.61	9.77	9.84	5
		50	0	9.69	9.70	9.83	5
		50	25	9.65	9.58	9.70	5
		50	50	9.68	9.66	9.69	5
		100	0	9.77	9.65	9.83	5
BW	MCS Index	Channel		132047	132322	132597	3GPP MPR
		Frequency (MHz)		1717.5	1745	1772.5	
15M	QPSK	1	0	14.84	14.95	14.91	0
		1	37	14.90	14.85	14.86	0
		1	74	14.79	14.91	14.92	0
		36	0	13.89	13.86	13.91	1
		36	19	13.86	13.91	13.89	1
		36	39	13.86	13.87	13.92	1
		75	0	13.80	13.84	13.95	1
15M	16QAM	1	0	13.88	13.86	13.96	1
		1	37	13.89	13.84	13.88	1
		1	74	13.85	13.80	13.84	1
		36	0	12.89	12.92	12.90	2
		36	19	12.86	12.92	12.91	2
		36	39	12.81	12.80	12.86	2
		75	0	12.85	12.87	12.91	2
15M	64QAM	1	0	12.86	12.87	12.91	2
		1	37	12.84	12.85	12.87	2
		1	74	12.83	12.87	12.80	2
		36	0	11.90	11.96	11.96	3
		36	19	11.84	11.85	11.91	3
		36	39	11.84	11.88	11.95	3
		75	0	11.86	11.85	11.97	3
15M	256QAM	1	0	9.72	9.73	9.67	5
		1	37	9.70	9.79	9.84	5
		1	74	9.66	9.67	9.80	5
		36	0	9.67	9.66	9.72	5
		36	19	9.59	9.77	9.85	5
		36	39	9.69	9.54	9.80	5
		75	0	9.53	9.52	9.62	5

LTE Conducted Power (Tablet Mode Reduction)									
LTE Band 66									
BW	MCS Index	Channel		132022	132322	132622	3GPP MPR		
		Frequency (MHz)		1715	1745	1775			
10M	QPSK	1	0	14.80	14.84	14.87	0		
		1	24	14.82	14.85	14.80	0		
		1	49	14.71	14.82	14.81	0		
		25	0	13.81	13.74	13.80	1		
		25	12	13.70	13.75	13.84	1		
		25	25	13.74	13.86	13.81	1		
10M	16QAM	50	0	13.80	13.79	13.86	1		
		1	0	13.77	13.77	13.85	1		
		1	24	13.70	13.81	13.85	1		
		1	49	13.66	13.78	13.81	1		
		25	0	12.69	12.74	12.89	2		
		25	12	12.75	12.75	12.84	2		
10M	64QAM	25	25	12.74	12.69	12.75	2		
		50	0	12.78	12.81	12.87	2		
		1	0	12.86	12.72	12.85	2		
		1	24	12.70	12.83	12.78	2		
		1	49	12.70	12.72	12.78	2		
		25	0	11.83	11.74	11.95	3		
10M	256QAM	25	12	11.88	11.88	11.73	3		
		25	25	11.84	11.82	11.78	3		
		50	0	11.75	11.85	11.77	3		
		1	0	9.52	9.61	9.73	5		
		1	24	9.65	9.55	9.69	5		
		1	49	9.72	9.75	9.79	5		
10M	256QAM	25	0	9.66	9.64	9.72	5		
		25	12	9.62	9.66	9.73	5		
		25	25	9.56	9.58	9.77	5		
		50	0	9.55	9.61	9.66	5		
		BW	MCS Index	Channel		131997	132322	132647	3GPP MPR
		Frequency (MHz)		1712.5	1745	1777.5			
5M	QPSK	1	0	14.81	14.86	14.75	0		
		1	12	14.74	14.86	14.76	0		
		1	24	14.83	14.77	14.73	0		
		12	0	13.78	13.76	13.62	1		
		12	6	13.78	13.81	13.86	1		
		12	13	13.73	13.83	13.68	1		
5M	16QAM	25	0	13.83	13.78	13.84	1		
		1	0	13.81	13.80	13.81	1		
		1	12	13.78	13.78	13.79	1		
		1	24	13.71	13.72	13.77	1		
		12	0	12.75	12.83	12.86	2		
		12	6	12.74	12.74	12.81	2		
5M	64QAM	12	13	12.76	12.80	12.73	2		
		25	0	12.76	12.78	12.90	2		
		1	0	12.83	12.80	12.83	2		
		1	12	12.80	12.73	12.79	2		
		1	24	12.81	12.76	12.74	2		
		12	0	11.91	11.73	11.85	3		
5M	256QAM	12	6	11.80	11.87	11.88	3		
		12	13	11.71	11.69	11.77	3		
		25	0	11.72	11.78	11.86	3		
		1	0	9.58	9.60	9.78	5		
		1	12	9.62	9.58	9.76	5		
		1	24	9.69	9.73	9.79	5		
5M	256QAM	12	0	9.68	9.70	9.70	5		
		12	6	9.57	9.69	9.75	5		
		12	13	9.61	9.59	9.77	5		
		25	0	9.51	9.59	9.59	5		

LTE Conducted Power (Tablet Mode Reduction)									
LTE Band 66									
BW	MCS Index	Channel		131987	132322	132657	3GPP MPR		
		Frequency (MHz)		1711.5	1745	1778.5			
3M	QPSK	1	0	14.82	14.82	14.89	0		
		1	7	14.72	14.79	14.73	0		
		1	14	14.87	14.77	14.84	0		
		8	0	13.70	13.74	13.75	1		
		8	3	13.68	13.78	13.71	1		
		8	7	13.73	13.75	13.82	1		
3M	16QAM	15	0	13.74	13.78	13.87	1		
		1	0	13.90	13.81	13.78	1		
		1	7	13.72	13.71	13.90	1		
		1	14	13.78	13.82	13.82	1		
		8	0	12.82	12.87	12.84	2		
		8	3	12.71	12.92	12.85	2		
3M	64QAM	8	7	12.73	12.75	12.74	2		
		15	0	12.72	12.84	12.79	2		
		1	0	12.87	12.84	12.83	2		
		1	7	12.87	12.79	12.87	2		
		1	14	12.73	12.66	12.71	2		
		8	0	11.80	11.88	11.88	3		
3M	256QAM	8	3	11.82	11.85	11.80	3		
		8	7	11.76	11.70	11.88	3		
		15	0	11.79	11.83	11.87	3		
		1	0	9.65	9.63	9.73	5		
		1	7	9.63	9.72	9.83	5		
		1	14	9.70	9.65	9.83	5		
3M	256QAM	8	0	9.74	9.62	9.73	5		
		8	3	9.57	9.71	9.78	5		
		8	7	9.67	9.58	9.73	5		
		15	0	9.57	9.52	9.63	5		
		BW	MCS Index	Channel		131979	132322	132665	3GPP MPR
				Frequency (MHz)		1710.7	1745	1779.3	
1.4M	QPSK	1	0	14.79	14.85	14.88	0		
		1	2	14.83	14.83	14.87	0		
		1	5	14.72	14.80	14.76	0		
		3	0	14.77	14.76	14.87	0		
		3	1	14.81	14.85	14.92	0		
		3	3	14.77	14.74	14.76	0		
1.4M	16QAM	6	0	13.74	13.72	13.87	1		
		1	0	13.91	13.83	13.80	1		
		1	2	13.76	13.84	13.85	1		
		1	5	13.74	13.70	13.71	1		
		3	0	13.86	13.82	13.85	1		
		3	1	13.77	13.78	13.81	1		
1.4M	64QAM	3	3	13.79	13.78	13.83	1		
		6	0	12.79	12.74	12.87	2		
		1	0	12.83	12.83	12.83	2		
		1	2	12.75	12.79	12.76	2		
		1	5	12.74	12.81	12.76	2		
		3	0	12.77	12.79	12.92	2		
1.4M	256QAM	3	1	12.69	12.76	12.82	2		
		3	3	12.76	12.90	12.79	2		
		6	0	11.76	11.79	11.82	3		
		1	0	9.74	9.74	9.86	5		
		1	2	9.71	9.70	9.80	5		
		1	5	9.60	9.72	9.78	5		
1.4M	256QAM	3	0	9.63	9.68	9.78	5		
		3	1	9.66	9.61	9.65	5		
		3	3	9.62	9.72	9.70	5		
		6	0	9.76	9.73	9.81	5		

LTE Conducted Power (Tablet Mode Reduction)							
LTE Band 71							
BW	MCS Index	RB Size	RB Offset	Low	Mid	Mid	3GPP MPR (dB)
		Channel		133222	133297	133372	
		Frequency (MHz)		673	680.5	688	
20M	QPSK	1	0	16.47	16.42	16.44	0
		1	50	16.46	16.41	16.43	0
		1	99	16.43	16.38	16.40	0
		50	0	15.45	15.39	15.42	1
		50	25	15.41	15.36	15.38	1
		50	50	15.39	15.34	15.36	1
		100	0	15.43	15.36	15.41	1
20M	16QAM	1	0	15.38	15.33	15.35	1
		1	50	15.36	15.31	15.33	1
		1	99	15.33	15.28	15.30	1
		50	0	14.46	14.41	14.43	2
		50	25	14.42	14.37	14.39	2
		50	50	14.40	14.35	14.37	2
20M	64QAM	1	0	14.44	14.39	14.41	2
		1	50	14.41	14.36	14.38	2
		1	99	14.40	14.35	14.37	2
		50	0	13.46	13.41	13.43	3
		50	25	13.43	13.38	13.40	3
		50	50	13.40	13.35	13.37	3
20M	256QAM	1	0	11.45	11.39	11.41	5
		1	50	11.41	11.37	11.43	5
		1	99	11.42	11.30	11.31	5
		50	0	11.38	11.36	11.33	5
		50	25	11.38	11.34	11.37	5
		50	50	11.31	11.26	11.32	5
BW	MCS Index	Channel		133197	133297	133397	3GPP MPR
		Frequency (MHz)		670.5	680.5	690.5	
		15M	QPSK	1	0	16.41	
1	37			16.41	16.36	16.35	0
1	74			16.43	16.31	16.38	0
36	0			15.36	15.31	15.40	1
36	19			15.36	15.26	15.32	1
36	39			15.33	15.29	15.31	1
75	0			15.33	15.30	15.30	1
15M	16QAM	1	0	15.30	15.24	15.26	1
		1	37	15.31	15.26	15.30	1
		1	74	15.29	15.21	15.23	1
		36	0	14.42	14.38	14.40	2
		36	19	14.36	14.27	14.38	2
		36	39	14.30	14.34	14.30	2
15M	64QAM	75	0	14.40	14.31	14.32	2
		1	0	14.36	14.39	14.34	2
		1	37	14.39	14.31	14.37	2
		1	74	14.36	14.33	14.30	2
		36	0	13.38	13.40	13.43	3
		36	19	13.36	13.37	13.34	3
15M	256QAM	36	39	13.30	13.25	13.29	3
		75	0	13.33	13.37	13.33	3
		1	0	11.36	11.36	11.40	5
		1	37	11.31	11.24	11.32	5
		1	74	11.34	11.18	11.27	5
		36	0	11.30	11.40	11.33	5
15M	256QAM	36	19	11.36	11.23	11.17	5
		36	39	11.29	11.29	11.31	5
		75	0	11.34	11.24	11.26	5

LTE Conducted Power (Tablet Mode Reduction)							
LTE Band 71							
BW	MCS Index	Channel		133172	133297	133422	3GPP MPR
		Frequency (MHz)		668	680.5	693	
10M	QPSK	1	0	16.40	16.21	16.27	0
		1	24	16.28	16.29	16.24	0
		1	49	16.34	16.25	16.22	0
		25	0	15.34	15.16	15.32	1
		25	12	15.33	15.24	15.29	1
		25	25	15.21	15.18	15.23	1
		50	0	15.39	15.25	15.19	1
10M	16QAM	1	0	15.23	15.14	15.31	1
		1	24	15.20	15.23	15.22	1
		1	49	15.24	15.20	15.24	1
		25	0	14.41	14.27	14.34	2
		25	12	14.27	14.19	14.20	2
		25	25	14.30	14.25	14.18	2
		50	0	14.23	14.25	14.27	2
10M	64QAM	1	0	14.30	14.22	14.27	2
		1	24	14.19	14.24	14.23	2
		1	49	14.30	14.24	14.29	2
		25	0	13.24	13.19	13.35	3
		25	12	13.26	13.31	13.38	3
		25	25	13.30	13.29	13.13	3
		50	0	13.29	13.27	13.22	3
10M	256QAM	1	0	11.44	11.31	11.27	5
		1	24	11.41	11.35	11.35	5
		1	49	11.31	11.28	11.28	5
		25	0	11.31	11.30	11.31	5
		25	12	11.34	11.31	11.35	5
		25	25	11.26	11.16	11.15	5
		50	0	11.40	11.17	11.32	5
BW	MCS Index	Channel		133147	133297	133447	3GPP MPR
		Frequency (MHz)		665.5	680.5	695.5	
5M	QPSK	1	0	16.29	16.25	16.25	0
		1	12	16.38	16.20	16.23	0
		1	24	16.31	16.20	16.17	0
		12	0	15.34	15.23	15.25	1
		12	6	15.20	15.26	15.20	1
		12	13	15.24	15.18	15.25	1
		25	0	15.24	15.15	15.14	1
5M	16QAM	1	0	15.27	15.22	15.23	1
		1	12	15.22	15.18	15.18	1
		1	24	15.18	15.12	15.20	1
		12	0	14.39	14.28	14.28	2
		12	6	14.37	14.31	14.33	2
		12	13	14.26	14.20	14.25	2
		25	0	14.32	14.24	14.24	2
5M	64QAM	1	0	14.24	14.19	14.33	2
		1	12	14.34	14.22	14.33	2
		1	24	14.29	14.27	14.23	2
		12	0	13.28	13.25	13.31	3
		12	6	13.22	13.34	13.31	3
		12	13	13.38	13.30	13.20	3
		25	0	13.32	13.12	13.34	3
5M	256QAM	1	0	11.39	11.42	11.39	5
		1	12	11.44	11.36	11.36	5
		1	24	11.38	11.29	11.36	5
		12	0	11.41	11.35	11.30	5
		12	6	11.38	11.40	11.33	5
		12	13	11.34	11.31	11.32	5
		25	0	11.37	11.29	11.32	5

NR Conducted Power (Tablet Mode Reduction)

NR Band 2_SA

BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		372000	376000	380000	
		Frequency (MHz)		1860	1880	1900	
20M	DFT-S PI/2 BPSK	1	1	15.06	15.20	15.12	0
20M	DFT-S QPSK	1	1	15.11	15.23	15.16	0
		1	53	15.09	15.22	15.10	0
		1	104	15.03	15.16	15.09	0
		50	0	13.98	14.18	14.06	1
		50	28	14.85	15.15	14.97	0
		50	56	13.88	14.13	14.01	1
		100	0	13.94	14.14	14.11	1
20M	DFT-S 16QAM	1	1	13.79	13.95	13.91	1
20M	DFT-S 64QAM	1	1	12.33	12.38	12.34	2.5
20M	DFT-S 256QAM	1	1	10.30	10.44	10.37	4.5
20M	CP QPSK	1	1	13.39	13.55	13.49	1.5
BW	MCS Index	Channel		371500	376000	380500	3GPP MPR
		Frequency (MHz)		1857.5	1880	1902.5	
15M	DFT-S PI/2 BPSK	1	1	14.96	15.11	15.05	0
15M	DFT-S QPSK	1	1	15.09	15.19	15.08	0
		1	40	15.09	15.21	15.07	0
		1	77	14.99	15.09	15.05	0
		36	0	13.89	14.12	14.05	1
		36	22	14.76	15.07	14.88	0
		36	43	13.79	14.04	13.95	1
		75	0	13.92	14.07	14.05	1
15M	DFT-S 16QAM	1	1	13.77	13.90	13.89	1
15M	DFT-S 64QAM	1	1	12.25	12.33	12.27	2.5
15M	DFT-S 256QAM	1	1	10.26	10.43	10.32	4.5
15M	CP QPSK	1	1	13.32	13.48	13.45	1.5

NR Conducted Power (Tablet Mode Reduction)

NR Band 2_SA

BW	MCS Index	Channel		371000	376000	381000	3GPP MPR
		Frequency (MHz)		1855	1880	1905	
10M	DFT-S PI/2 BPSK	1	1	15.00	15.16	15.03	0
10M	DFT-S QPSK	1	1	15.09	15.17	15.07	0
		1	26	15.03	15.19	15.02	0
		1	50	14.93	15.16	15.06	0
		25	0	13.90	14.13	13.99	1
		25	14	14.76	15.11	14.97	0
		25	27	13.82	14.05	13.94	1
		50	0	13.88	14.05	14.11	1
10M	DFT-S 16QAM	1	1	13.71	13.94	13.82	1
10M	DFT-S 64QAM	1	1	12.32	12.30	12.27	2.5
10M	DFT-S 256QAM	1	1	10.27	10.44	10.30	4.5
10M	CP QPSK	1	1	13.31	13.52	13.39	1.5
BW	MCS Index	Channel		370500	376000	381500	3GPP MPR
		Frequency (MHz)		1852.5	1880	1907.5	
5M	DFT-S PI/2 BPSK	1	1	15.01	15.20	15.10	0
5M	DFT-S QPSK	1	1	15.04	15.18	15.07	0
		1	13	15.02	15.19	15.10	0
		1	23	15.03	15.11	15.07	0
		12	0	13.95	14.18	14.06	1
		12	7	14.76	15.10	14.94	0
		12	13	13.86	14.06	14.01	1
		25	0	13.88	14.10	14.01	1
5M	DFT-S 16QAM	1	1	13.71	13.87	13.86	1
5M	DFT-S 64QAM	1	1	12.23	12.34	12.33	2.5
5M	DFT-S 256QAM	1	1	10.21	10.37	10.33	4.5
5M	CP QPSK	1	1	13.37	13.49	13.41	1.5

NR Conducted Power (Tablet Mode Reduction)

NR Band 5_SA

BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		166800	167300	167800	
		Frequency (MHz)		834	836.5	839	
20M	DFT-S PI/2 BPSK	1	1	19.18	19.24	19.20	0
20M	DFT-S QPSK	1	1	19.25	19.28	19.26	0
		1	53	19.16	19.24	19.22	0
		1	104	19.14	19.23	19.17	0
		50	0	18.17	18.22	18.26	1
		50	28	19.11	19.23	19.14	0
		50	56	18.25	18.21	18.28	1
		100	0	18.27	18.30	18.29	1
20M	DFT-S 16QAM	1	1	18.25	18.18	18.21	1
20M	DFT-S 64QAM	1	1	16.54	16.59	16.53	2.5
20M	DFT-S 256QAM	1	1	14.66	14.71	14.62	4.5
20M	CP QPSK	1	1	17.53	17.61	17.58	1.5
BW	MCS Index	Channel		166300	167300	168300	3GPP MPR
		Frequency (MHz)		831.5	836.5	841.5	
15M	DFT-S PI/2 BPSK	1	1	19.18	19.17	19.15	0
15M	DFT-S QPSK	1	1	19.20	19.26	19.21	0
		1	40	19.09	19.19	19.14	0
		1	77	19.10	19.23	19.16	0
		36	0	18.17	18.18	18.22	1
		36	22	19.07	19.22	19.14	0
		36	43	18.15	18.14	18.26	1
		75	0	18.25	18.30	18.29	1
15M	DFT-S 16QAM	1	1	18.20	18.12	18.13	1
15M	DFT-S 64QAM	1	1	16.44	16.52	16.52	2.5
15M	DFT-S 256QAM	1	1	14.63	14.61	14.60	4.5
15M	CP QPSK	1	1	17.49	17.59	17.58	1.5

NR Conducted Power (Tablet Mode Reduction)

NR Band 5_SA

BW	MCS Index	Channel		165800	167300	168800	3GPP MPR
		Frequency (MHz)		829	836.5	844	
10M	DFT-S PI/2 BPSK	1	1	19.11	19.17	19.20	0
10M	DFT-S QPSK	1	1	19.19	19.26	19.18	0
		1	26	19.13	19.18	19.12	0
		1	50	19.04	19.17	19.10	0
		25	0	18.15	18.19	18.25	1
		25	14	19.06	19.22	19.10	0
		25	27	18.24	18.13	18.23	1
		50	0	18.19	18.29	18.20	1
10M	DFT-S 16QAM	1	1	18.21	18.11	18.20	1
10M	DFT-S 64QAM	1	1	16.52	16.52	16.53	2.5
10M	DFT-S 256QAM	1	1	14.63	14.66	14.58	4.5
10M	CP QPSK	1	1	17.47	17.52	17.57	1.5
BW	MCS Index	Channel		165300	167300	169300	3GPP MPR
		Frequency (MHz)		826.5	836.5	846.5	
5M	DFT-S PI/2 BPSK	1	1	19.09	19.20	19.14	0
5M	DFT-S QPSK	1	1	19.22	19.27	19.22	0
		1	13	19.14	19.18	19.16	0
		1	23	19.11	19.13	19.14	0
		12	0	18.10	18.21	18.21	1
		12	7	19.02	19.21	19.07	0
		12	13	18.16	18.11	18.23	1
		25	0	18.26	18.26	18.21	1
5M	DFT-S 16QAM	1	1	18.16	18.12	18.21	1
5M	DFT-S 64QAM	1	1	16.52	16.52	16.52	2.5
5M	DFT-S 256QAM	1	1	14.62	14.71	14.61	4.5
5M	CP QPSK	1	1	17.45	17.56	17.56	1.5

NR Conducted Power (Tablet Mode Reduction)

NR Band 7_SA

BW	MCS Index	Channel		502000	507000	512000	3GPP MPR
		Frequency (MHz)		2510	2535	2560	
20M	DFT-S PI/2 BPSK	1	1	12.36	12.44	12.43	0
20M	DFT-S QPSK	1	1	12.44	12.49	12.47	0
		1	53	12.38	12.45	12.45	0
		1	104	12.36	12.43	12.39	0
		50	0	11.31	11.37	11.34	1
		50	28	12.28	12.41	12.36	0
		50	56	11.39	11.42	11.37	1
		100	0	11.41	11.47	11.44	1
20M	DFT-S 16QAM	1	1	11.34	11.42	11.43	1
20M	DFT-S 64QAM	1	1	9.89	9.92	9.91	2.5
20M	DFT-S 256QAM	1	1	7.77	7.83	7.81	4.5
20M	CP QPSK	1	1	10.68	10.74	10.71	1.5
BW	MCS Index	Channel		501500	507000	512500	3GPP MPR
		Frequency (MHz)		2507.5	2535	2562.5	
15M	DFT-S PI/2 BPSK	1	1	12.33	12.36	12.40	0
15M	DFT-S QPSK	1	1	12.34	12.48	12.43	0
		1	40	12.33	12.37	12.39	0
		1	77	12.26	12.38	12.31	0
		36	0	11.28	11.30	11.34	1
		36	22	12.18	12.39	12.27	0
		36	43	11.32	11.34	11.36	1
		75	0	11.36	11.37	11.43	1
15M	DFT-S 16QAM	1	1	11.32	11.37	11.43	1
15M	DFT-S 64QAM	1	1	9.84	9.90	9.85	2.5
15M	DFT-S 256QAM	1	1	7.72	7.80	7.76	4.5
15M	CP QPSK	1	1	10.62	10.71	10.62	1.5

NR Conducted Power (Tablet Mode Reduction)

NR Band 7_SA

BW	MCS Index	Channel		501000	507000	513000	3GPP MPR
		Frequency (MHz)		2505	2535	2565	
10M	DFT-S PI/2 BPSK	1	1	12.32	12.38	12.36	0
10M	DFT-S QPSK	1	1	12.38	12.44	12.44	0
		1	26	12.28	12.42	12.36	0
		1	50	12.36	12.40	12.34	0
		25	0	11.27	11.31	11.29	1
		25	14	12.19	12.39	12.36	0
		25	27	11.32	11.38	11.32	1
		50	0	11.33	11.40	11.40	1
10M	DFT-S 16QAM	1	1	11.29	11.41	11.33	1
10M	DFT-S 64QAM	1	1	9.82	9.84	9.89	2.5
10M	DFT-S 256QAM	1	1	7.73	7.77	7.71	4.5
10M	CP QPSK	1	1	10.63	10.69	10.66	1.5
BW	MCS Index	Channel		500500	507000	513500	3GPP MPR
		Frequency (MHz)		2502.5	2535	2567.5	
5M	DFT-S PI/2 BPSK	1	1	12.30	12.43	12.36	0
5M	DFT-S QPSK	1	1	12.36	12.44	12.43	0
		1	13	12.31	12.41	12.37	0
		1	23	12.31	12.37	12.29	0
		12	0	11.27	11.29	11.26	1
		12	7	12.27	12.33	12.28	0
		12	13	11.30	11.35	11.28	1
		25	0	11.31	11.38	11.44	1
5M	DFT-S 16QAM	1	1	11.28	11.40	11.43	1
5M	DFT-S 64QAM	1	1	9.87	9.85	9.81	2.5
5M	DFT-S 256QAM	1	1	7.68	7.78	7.76	4.5
5M	CP QPSK	1	1	10.64	10.66	10.71	1.5

NR Conducted Power (Tablet Mode Reduction)

NR Band 25_SA

BW	MCS Index	Channel		372000	376500	381000	3GPP MPR
		Frequency (MHz)		1860	1882.5	1905	
20M	DFT-S PI/2 BPSK	1	1	15.43	15.38	15.20	0
20M	DFT-S QPSK	1	1	15.43	15.44	15.22	0
		1	53	15.41	15.41	15.18	0
		1	104	15.38	15.40	15.16	0
		50	0	14.18	14.37	14.27	1
		50	28	15.08	15.29	15.02	0
		50	56	14.16	14.38	14.27	1
		100	0	14.18	14.44	14.34	1
20M	DFT-S 16QAM	1	1	14.14	14.38	14.29	1
20M	DFT-S 64QAM	1	1	12.68	12.87	12.72	2.5
20M	DFT-S 256QAM	1	1	10.61	10.88	10.74	4.5
20M	CP QPSK	1	1	13.59	13.81	13.78	1.5

NR Conducted Power (Tablet Mode Reduction)

NR Band 25_SA

BW	MCS Index	Channel		371500	376500	381500	3GPP MPR
		Frequency (MHz)		1857.5	1882.5	1907.5	
15M	DFT-S PI/2 BPSK	1	1	15.41	15.37	15.14	0
15M	DFT-S QPSK	1	1	15.34	15.35	15.13	0
		1	40	15.36	15.41	15.09	0
		1	77	15.33	15.38	15.08	0
		36	0	14.16	14.37	14.25	1
		36	22	15.04	15.20	15.02	0
		36	43	14.15	14.38	14.20	1
		75	0	14.09	14.37	14.33	1
15M	DFT-S 16QAM	1	1	14.09	14.32	14.22	1
15M	DFT-S 64QAM	1	1	12.66	12.85	12.65	2.5
15M	DFT-S 256QAM	1	1	10.55	10.88	10.70	4.5
15M	CP QPSK	1	1	13.49	13.81	13.78	1.5
BW	MCS Index	Channel		371000	376500	382000	3GPP MPR
		Frequency (MHz)		1855	1882.5	1910	
10M	DFT-S PI/2 BPSK	1	1	15.34	15.35	15.19	0
10M	DFT-S QPSK	1	1	15.33	15.35	15.21	0
		1	26	15.34	15.36	15.17	0
		1	50	15.29	15.31	15.13	0
		25	0	14.17	14.28	14.19	1
		25	14	15.08	15.26	14.93	0
		25	27	14.10	14.31	14.21	1
		50	0	14.15	14.36	14.31	1
10M	DFT-S 16QAM	1	1	14.05	14.28	14.20	1
10M	DFT-S 64QAM	1	1	12.63	12.84	12.62	2.5
10M	DFT-S 256QAM	1	1	10.52	10.83	10.74	4.5
10M	CP QPSK	1	1	13.55	13.77	13.72	1.5

NR Conducted Power (Tablet Mode Reduction)

NR Band 25_SA

BW	MCS Index	Channel		370500	376500	382500	3GPP MPR
		Frequency (MHz)		1852.5	1882.5	1912.5	
5M	DFT-S PI/2 BPSK	1	1	15.40	15.37	15.11	0
5M	DFT-S QPSK	1	1	15.39	15.41	15.13	0
		1	13	15.36	15.32	15.13	0
		1	23	15.31	15.37	15.15	0
		12	0	14.16	14.37	14.17	1
		12	7	15.05	15.22	14.99	0
		12	13	14.12	14.38	14.23	1
		25	0	14.18	14.35	14.29	1
5M	DFT-S 16QAM	1	1	14.14	14.37	14.29	1
5M	DFT-S 64QAM	1	1	12.66	12.87	12.70	2.5
5M	DFT-S 256QAM	1	1	10.54	10.82	10.66	4.5
5M	CP QPSK	1	1	13.49	13.77	13.78	1.5

NR Conducted Power (Tablet Mode Reduction)

NR Band 30_SA

BW	MCS Index	RB Size	RB Offset	Channel		Mid	3GPP MPR (dB)
		Channel		462000			
		Frequency (MHz)		2310			
10M	DFT-S PI/2 BPSK	1	1		12.55		0
10M	DFT-S QPSK	1	1		12.62		0
		1	26		12.55		0
		1	50		12.52		0
		25	0		11.66		1
		25	14		12.51		0
		25	27		11.6		1
		50	0		11.58		1
10M	DFT-S 16QAM	1	1		11.56		1
10M	DFT-S 64QAM	1	1		10.05		2.5
10M	DFT-S 256QAM	1	1		8.01		4.5
10M	CP QPSK	1	1		11.01		1.5
BW	MCS Index	Channel		461500	462000	462500	3GPP MPR
		Frequency (MHz)		2307.5	2310	2312.5	
5M	DFT-S PI/2 BPSK	1	1	12.45	12.51	12.45	0
5M	DFT-S QPSK	1	1	12.54	12.58	12.53	0
		1	13	12.47	12.52	12.41	0
		1	23	12.46	12.48	12.41	0
		12	0	11.56	11.66	11.48	1
		12	7	12.40	12.42	12.35	0
		12	13	11.43	11.50	11.42	1
		25	0	11.45	11.51	11.39	1
5M	DFT-S 16QAM	1	1	11.44	11.48	11.38	1
5M	DFT-S 64QAM	1	1	9.89	9.95	9.88	2.5
5M	DFT-S 256QAM	1	1	7.94	7.99	7.87	4.5
5M	CP QPSK	1	1	10.92	10.98	10.86	1.5

NR Conducted Power (Tablet Mode Reduction)

NR Band 66_SA

BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		346000	349000	352000	
		Frequency (MHz)		1730	1745	1760	
40M	DFT-S PI/2 BPSK	1	1	14.67	14.79	14.73	0
40M	DFT-S QPSK	1	1	14.73	14.81	14.77	0
		1	108	14.71	14.76	14.75	0
		1	214	14.69	14.79	14.67	0
		108	0	13.92	13.96	13.46	1
		108	54	14.32	14.42	14.32	0
		108	108	13.90	14.06	13.49	1
		216	0	13.97	14.06	13.59	1
40M	DFT-S 16QAM	1	1	13.92	14.05	13.56	1
40M	DFT-S 64QAM	1	1	12.37	12.51	12.29	2.5
40M	DFT-S 256QAM	1	1	10.34	10.48	10.32	4.5
40M	CP QPSK	1	1	13.40	13.45	13.36	1.5

NR Conducted Power (Tablet Mode Reduction)

NR Band 66_SA

BW	MCS Index	Channel		344000	349000	354000	3GPP MPR
		Frequency (MHz)		1720	1745	1770	
20M	DFT-S PI/2 BPSK	1	1	14.57	14.70	14.66	0
20M	DFT-S QPSK	1	1	14.71	14.71	14.68	0
		1	53	14.63	14.66	14.69	0
		1	104	14.61	14.70	14.62	0
		50	0	13.83	13.91	13.45	1
		50	28	14.23	14.40	14.25	0
		50	56	13.90	14.01	13.41	1
		100	0	13.87	13.98	13.50	1
20M	DFT-S 16QAM	1	1	13.84	14.04	13.49	1
20M	DFT-S 64QAM	1	1	12.35	12.41	12.26	2.5
20M	DFT-S 256QAM	1	1	10.34	10.41	10.27	4.5
20M	CP QPSK	1	1	13.34	13.44	13.27	1.5

NR Conducted Power (Tablet Mode Reduction)

NR Band 66_SA

BW	MCS Index	Channel		343500	349000	354500	3GPP MPR
		Frequency (MHz)		1717.5	1745	1772.5	
15M	DFT-S PI/2 BPSK	1	1	14.66	14.71	14.67	0
15M	DFT-S QPSK	1	1	14.63	14.76	14.68	0
		1	40	14.69	14.67	14.65	0
		1	77	14.63	14.74	14.60	0
		36	0	13.92	13.95	13.36	1
		36	22	14.25	14.39	14.32	0
		36	43	13.80	14.05	13.47	1
		75	0	13.88	14.06	13.51	1
15M	DFT-S 16QAM	1	1	13.90	14.01	13.50	1
15M	DFT-S 64QAM	1	1	12.33	12.41	12.29	2.5
15M	DFT-S 256QAM	1	1	10.24	10.39	10.32	4.5
15M	CP QPSK	1	1	13.30	13.39	13.28	1.5
BW	MCS Index	Channel		343000	349000	355000	3GPP MPR
		Frequency (MHz)		1715	1745	1775	
10M	DFT-S PI/2 BPSK	1	1	14.67	14.75	14.73	0
10M	DFT-S QPSK	1	1	14.64	14.77	14.77	0
		1	26	14.64	14.67	14.72	0
		1	50	14.66	14.73	14.58	0
		25	0	13.88	13.89	13.45	1
		25	14	14.25	14.33	14.24	0
		25	27	13.84	14.04	13.44	1
		50	0	13.97	13.97	13.54	1
10M	DFT-S 16QAM	1	1	13.82	14.03	13.55	1
10M	DFT-S 64QAM	1	1	12.35	12.48	12.20	2.5
10M	DFT-S 256QAM	1	1	10.34	10.38	10.28	4.5
10M	CP QPSK	1	1	13.40	13.44	13.36	1.5

NR Conducted Power (Tablet Mode Reduction)

NR Band 66_SA

BW	MCS Index	Channel		342500	349000	355500	3GPP MPR
		Frequency (MHz)		1712.5	1745	1777.5	
5M	DFT-S PI/2 BPSK	1	1	14.58	14.79	14.73	0
5M	DFT-S QPSK	1	1	14.69	14.77	14.74	0
		1	13	14.61	14.74	14.71	0
		1	23	14.68	14.76	14.63	0
		12	0	13.86	13.94	13.42	1
		12	7	14.22	14.34	14.25	0
		12	13	13.88	14.03	13.44	1
		25	0	13.92	14.06	13.54	1
5M	DFT-S 16QAM	1	1	13.92	13.98	13.49	1
5M	DFT-S 64QAM	1	1	12.37	12.41	12.26	2.5
5M	DFT-S 256QAM	1	1	10.27	10.44	10.22	4.5
5M	CP QPSK	1	1	13.33	13.42	13.30	1.5

NR Conducted Power (Tablet Mode Reduction)

NR Band 71_SA

BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		134600	136100	137600	
		Frequency (MHz)		673	680.5	688	
20M	DFT-S PI/2 BPSK	1	1	19.86	19.92	19.88	0
20M	DFT-S QPSK	1	1	19.94	19.98	19.96	0
		1	53	19.88	19.96	19.86	0
		1	104	19.82	19.88	19.85	0
		50	0	18.95	19.00	18.97	1
		50	28	19.79	19.87	19.82	0
		50	56	18.89	18.97	18.93	1
		100	0	18.85	18.94	18.91	1
20M	DFT-S 16QAM	1	1	18.83	18.90	18.86	1
20M	DFT-S 64QAM	1	1	17.22	17.29	17.25	2.5
20M	DFT-S 256QAM	1	1	15.29	15.40	15.30	4.5
20M	CP QPSK	1	1	18.35	18.41	18.37	1.5
BW	MCS Index	Channel		134100	136100	138100	3GPP MPR
		Frequency (MHz)		670.5	680.5	690.5	
15M	DFT-S PI/2 BPSK	1	1	19.77	19.90	19.78	0
15M	DFT-S QPSK	1	1	19.87	19.91	19.96	0
		1	40	19.79	19.93	19.85	0
		1	77	19.81	19.88	19.78	0
		36	0	18.92	18.97	18.94	1
		36	22	19.75	19.83	19.80	0
		36	43	18.79	18.87	18.88	1
		75	0	18.76	18.87	18.90	1
15M	DFT-S 16QAM	1	1	18.83	18.86	18.79	1
15M	DFT-S 64QAM	1	1	17.14	17.22	17.21	2.5
15M	DFT-S 256QAM	1	1	15.27	15.30	15.29	4.5
15M	CP QPSK	1	1	18.25	18.36	18.35	1.5


NR Conducted Power (Tablet Mode Reduction)

NR Band 71_SA

BW	MCS Index	Channel		133600	136100	138600	3GPP MPR
		Frequency (MHz)		668	680.5	693	
10M	DFT-S PI/2 BPSK	1	1	19.84	19.92	19.82	0
10M	DFT-S QPSK	1	1	19.90	19.96	19.87	0
		1	26	19.80	19.93	19.78	0
		1	50	19.82	19.81	19.77	0
		25	0	18.89	18.91	18.87	1
		25	14	19.72	19.77	19.72	0
		25	27	18.83	18.90	18.83	1
		50	0	18.77	18.87	18.84	1
10M	DFT-S 16QAM	1	1	18.80	18.80	18.79	1
10M	DFT-S 64QAM	1	1	17.18	17.24	17.15	2.5
10M	DFT-S 256QAM	1	1	15.23	15.31	15.26	4.5
10M	CP QPSK	1	1	18.30	18.34	18.33	1.5
BW	MCS Index	Channel		133100	136100	139100	3GPP MPR
		Frequency (MHz)		665.5	680.5	695.5	
5M	DFT-S PI/2 BPSK	1	1	19.78	19.91	19.82	0
5M	DFT-S QPSK	1	1	19.89	19.91	19.89	0
		1	13	19.79	19.86	19.78	0
		1	23	19.80	19.80	19.79	0
		12	0	18.90	18.94	18.88	1
		12	7	19.76	19.84	19.80	0
		12	13	18.82	18.87	18.90	1
		25	0	18.83	18.91	18.83	1
5M	DFT-S 16QAM	1	1	18.83	18.90	18.85	1
5M	DFT-S 64QAM	1	1	17.22	17.27	17.18	2.5
5M	DFT-S 256QAM	1	1	15.24	15.34	15.28	4.5
5M	CP QPSK	1	1	18.31	18.41	18.35	1.5

NR Conducted Power (Tablet Mode Reduction)

NR Band 38_SA



BW	MCS Index	Channel		516000	519000	522000	3GPP MPR
		Frequency (MHz)		2580	2595	2610	
20M	DFT-S PI/2 BPSK	1	1	11.34	11.41	11.38	0
20M	DFT-S QPSK	1	1	11.41	11.47	11.43	0
		1	26	11.32	11.41	11.38	0
		1	49	11.33	11.43	11.34	0
		25	0	10.42	10.40	10.38	1
		25	13	11.32	11.38	11.31	0
		25	26	10.36	10.45	10.40	1
		50	0	10.45	10.49	10.44	1
20M	DFT-S 16QAM	1	1	10.35	10.43	10.38	1
20M	DFT-S 64QAM	1	1	8.92	8.96	8.91	2.5
20M	DFT-S 256QAM	1	1	6.91	6.97	6.95	4.5
20M	CP QPSK	1	1	9.93	9.98	9.96	1.5

NR Conducted Power (Tablet Mode Reduction)							
NR Band 38_SA							
BW	MCS Index	Channel		515500	519000	522500	3GPP MPR
		Frequency (MHz)		2577.5	2595	2612.5	
15M	DFT-S PI/2 BPSK	1	1	11.31	11.35	11.36	0
15M	DFT-S QPSK	1	1	11.33	11.42	11.41	0
		1	19	11.32	11.34	11.33	0
		1	36	11.25	11.37	11.25	0
		18	0	10.35	10.35	10.38	1
		18	10	11.29	11.32	11.31	0
		18	20	10.34	10.40	10.37	1
36	0	10.37	10.41	10.44	1		
15M	DFT-S 16QAM	1	1	10.32	10.35	10.32	1
15M	DFT-S 64QAM	1	1	8.82	8.93	8.85	2.5
15M	DFT-S 256QAM	1	1	6.87	6.95	6.95	4.5
15M	CP QPSK	1	1	9.89	9.94	9.86	1.5
BW	MCS Index	Channel		515000	519000	523000	3GPP MPR
		Frequency (MHz)		2575	2595	2615	
10M	DFT-S PI/2 BPSK	1	1	11.28	11.33	11.31	0
10M	DFT-S QPSK	1	1	11.40	11.39	11.36	0
		1	11	11.22	11.41	11.37	0
		1	22	11.29	11.37	11.27	0
		12	0	10.41	10.39	10.36	1
		12	6	11.32	11.38	11.40	0
		12	12	10.31	10.37	10.39	1
24	0	10.42	10.43	10.36	1		
10M	DFT-S 16QAM	1	1	10.33	10.41	10.28	1
10M	DFT-S 64QAM	1	1	8.85	8.91	8.85	2.5
10M	DFT-S 256QAM	1	1	6.84	6.96	6.88	4.5
10M	CP QPSK	1	1	9.88	9.96	9.88	1.5

NR Conducted Power (Tablet Mode Reduction)

NR Band 40_SA




BW	MCS Index	Channel		468000	470000	472000	3GPP MPR
		Frequency (MHz)		2340	2350	2360	
80M	DFT-S PI/2 BPSK	1	1	12.18	12.22	12.26	0
80M	DFT-S QPSK	1	1	12.26	12.31	12.34	0
		1	109	12.16	12.20	12.24	0
		1	215	12.05	12.13	12.10	0
		108	0	11.17	11.20	11.17	1
		108	55	12.10	12.13	12.17	0
		108	109	11.18	11.21	11.26	1
		216	0	11.26	11.28	11.36	1
80M	DFT-S 16QAM	1	1	11.16	11.12	11.22	1
80M	DFT-S 64QAM	1	1	9.68	9.65	9.72	2.5
80M	DFT-S 256QAM	1	1	7.64	7.62	7.67	4.5
80M	CP QPSK	1	1	10.60	10.67	10.68	1.5

NR Conducted Power (Tablet Mode Reduction)							
NR Band 40_SA							
BW	MCS Index	Channel		466000	470000	474000	3GPP MPR
		Frequency (MHz)		2330	2350	2370	
60M	DFT-S PI/2 BPSK	1	1	12.16	12.19	12.18	0
60M	DFT-S QPSK	1	1	12.16	12.23	12.29	0
		1	81	12.06	12.11	12.16	0
		1	160	12.05	12.06	12.03	0
		81	0	11.16	11.14	11.13	1
		81	41	12.04	12.13	12.11	0
		81	81	11.17	11.21	11.19	1
60M	DFT-S 16QAM	162	0	11.23	11.22	11.31	1
60M	DFT-S 16QAM	1	1	11.10	11.10	11.22	1
60M	DFT-S 64QAM	1	1	9.64	9.56	9.67	2.5
60M	DFT-S 256QAM	1	1	7.55	7.56	7.61	4.5
60M	CP QPSK	1	1	10.52	10.57	10.68	1.5
BW	MCS Index	Channel		465000	470000	475000	3GPP MPR
		Frequency (MHz)		2325	2350	2375	
50M	DFT-S PI/2 BPSK	1	1	12.13	12.20	12.19	0
50M	DFT-S QPSK	1	1	12.19	12.28	12.33	0
		1	67	12.11	12.18	12.20	0
		1	131	12.05	12.11	12.04	0
		64	0	11.08	11.11	11.16	1
		64	35	12.06	12.11	12.09	0
		64	69	11.08	11.20	11.18	1
50M	DFT-S 16QAM	128	0	11.19	11.28	11.36	1
50M	DFT-S 16QAM	1	1	11.16	11.03	11.14	1
50M	DFT-S 64QAM	1	1	9.64	9.58	9.69	2.5
50M	DFT-S 256QAM	1	1	7.54	7.58	7.65	4.5
50M	CP QPSK	1	1	10.56	10.65	10.63	1.5

NR Conducted Power (Tablet Mode Reduction)							
NR Band 40_SA							
BW	MCS Index	Channel		464000	470000	476000	3GPP MPR
		Frequency (MHz)		2320	2350	2380	
40M	DFT-S PI/2 BPSK	1	1	12.17	12.12	12.21	0
40M	DFT-S QPSK	1	1	12.20	12.27	12.33	0
		1	53	12.09	12.16	12.19	0
		1	104	11.98	12.04	12.03	0
		50	0	11.12	11.11	11.11	1
		50	28	12.09	12.04	12.12	0
		50	56	11.17	11.11	11.25	1
		100	0	11.22	11.23	11.31	1
40M	DFT-S 16QAM	1	1	11.12	11.08	11.22	1
40M	DFT-S 64QAM	1	1	9.68	9.65	9.65	2.5
40M	DFT-S 256QAM	1	1	7.63	7.59	7.58	4.5
40M	CP QPSK	1	1	10.58	10.58	10.65	1.5

NR Conducted Power (Tablet Mode Reduction)

NR Band 40_SA



BW	MCS Index	Channel		462000	470000	478000	3GPP MPR
		Frequency (MHz)		2310	2350	2390	
20M	DFT-S PI/2 BPSK	1	1	12.18	12.15	12.26	0
20M	DFT-S QPSK	1	1	12.25	12.25	12.31	0
		1	26	12.07	12.17	12.14	0
		1	49	11.95	12.06	12.06	0
		25	0	11.10	11.13	11.10	1
		25	13	12.09	12.10	12.17	0
		25	26	11.17	11.16	11.18	1
		50	0	11.16	11.25	11.35	1
20M	DFT-S 16QAM	1	1	11.16	11.02	11.15	1
20M	DFT-S 64QAM	1	1	9.62	9.55	9.72	2.5
20M	DFT-S 256QAM	1	1	7.57	7.60	7.62	4.5
20M	CP QPSK	1	1	10.55	10.63	10.63	1.5

NR Conducted Power (Tablet Mode Reduction)							
NR Band 40_SA							
BW	MCS Index	Channel		461500	470000	478500	3GPP MPR
		Frequency (MHz)		2307.5	2350	2392.5	
15M	DFT-S PI/2 BPSK	1	1	12.11	12.16	12.17	0
15M	DFT-S QPSK	1	1	12.16	12.21	12.33	0
		1	19	12.16	12.12	12.21	0
		1	36	12.02	12.10	12.03	0
		18	0	11.15	11.19	11.15	1
		18	10	12.02	12.11	12.12	0
		18	20	11.18	11.11	11.23	1
36	0	11.24	11.26	11.31	1		
15M	DFT-S 16QAM	1	1	11.13	11.10	11.17	1
15M	DFT-S 64QAM	1	1	9.60	9.60	9.69	2.5
15M	DFT-S 256QAM	1	1	7.54	7.59	7.59	4.5
15M	CP QPSK	1	1	10.56	10.64	10.63	1.5
BW	MCS Index	Channel		461000	470000	479000	3GPP MPR
		Frequency (MHz)		2305	2350	2395	
10M	DFT-S PI/2 BPSK	1	1	12.13	12.20	12.19	0
10M	DFT-S QPSK	1	1	12.20	12.30	12.29	0
		1	11	12.16	12.20	12.22	0
		1	22	12.02	12.08	12.01	0
		12	0	11.14	11.19	11.14	1
		12	6	12.04	12.11	12.17	0
		12	12	11.18	11.14	11.19	1
24	0	11.16	11.26	11.32	1		
10M	DFT-S 16QAM	1	1	11.11	11.02	11.19	1
10M	DFT-S 64QAM	1	1	9.68	9.59	9.66	2.5
10M	DFT-S 256QAM	1	1	7.63	7.53	7.65	4.5
10M	CP QPSK	1	1	10.57	10.62	10.64	1.5

NR Conducted Power (Tablet Mode Reduction)									
NR Band 41_SA									
BW	MCS Index	RB Size	RB Offset	Low	Mid-1	Mid-2	Mid-3	High	3GPP MPR (dB)
		Channel		509202	513900	518598	523302	528000	
		Frequency (MHz)		2546.01	2569.5	2592.99	2616.51	2640	
100M	DFT-S PI/2 BPSK	1	1	11.93	11.86	11.94	11.86	11.96	0
100M	DFT-S QPSK	1	1	11.97	11.87	11.98	11.95	11.99	0
		1	137	11.87	11.85	11.94	11.95	11.94	0
		1	271	11.82	11.80	11.91	11.87	11.92	0
		135	0	10.96	10.91	10.86	10.83	10.89	1
		135	69	11.66	11.54	11.62	11.56	11.69	0
		135	138	10.92	10.83	10.92	10.84	10.95	1
		270	0	10.91	10.92	10.90	10.93	10.96	1
100M	DFT-S 16QAM	1	1	10.88	10.85	10.87	10.90	10.95	1
100M	DFT-S 64QAM	1	1	9.47	9.35	9.37	9.36	9.44	2.5
100M	DFT-S 256QAM	1	1	7.41	7.33	7.32	7.37	7.46	4.5
100M	CP QPSK	1	1	10.44	10.36	10.35	10.40	10.48	1.5
BW	MCS Index	Channel		508200	513402	518598	523800	528996	3GPP MPR
		Frequency (MHz)		2541	2567.01	2592.99	2619	2644.98	
90M	DFT-S PI/2 BPSK	1	1	11.87	11.86	11.91	11.80	11.90	0
90M	DFT-S QPSK	1	1	11.97	11.82	11.92	11.92	11.98	0
		1	123	11.77	11.76	11.87	11.90	11.91	0
		1	243	11.79	11.73	11.87	11.84	11.87	0
		120	0	10.93	10.90	10.76	10.81	10.81	1
		120	63	11.64	11.50	11.54	11.46	11.60	0
		120	125	10.83	10.76	10.91	10.82	10.93	1
		243	0	10.91	10.82	10.90	10.85	10.86	1
90M	DFT-S 16QAM	1	1	10.82	10.76	10.84	10.88	10.94	1
90M	DFT-S 64QAM	1	1	9.44	9.35	9.30	9.34	9.44	2.5
90M	DFT-S 256QAM	1	1	7.33	7.24	7.29	7.31	7.46	4.5
90M	CP QPSK	1	1	10.43	10.35	10.33	10.33	10.42	1.5

NR Conducted Power (Tablet Mode Reduction)									
NR Band 41_SA									
BW	MCS Index	Channel		507204	509304	518598	500298	529998	3GPP MPR
		Frequency (MHz)		2536.02	2546.52	2592.99	2621.49	2649.99	
80M	DFT-S PI/2 BPSK	1	1	11.91	11.86	11.89	11.80	11.92	0
80M	DFT-S QPSK	1	1	11.91	11.77	11.89	11.90	11.92	0
		1	109	11.79	11.75	11.88	11.88	11.89	0
		1	215	11.75	11.70	11.90	11.78	11.82	0
		108	0	10.90	10.89	10.78	10.79	10.81	1
		108	55	11.57	11.51	11.55	11.52	11.62	0
		108	109	10.89	10.76	10.84	10.78	10.85	1
		216	0	10.91	10.82	10.90	10.85	10.87	1
80M	DFT-S 16QAM	1	1	10.79	10.77	10.82	10.86	10.94	1
80M	DFT-S 64QAM	1	1	9.46	9.26	9.32	9.35	9.39	2.5
80M	DFT-S 256QAM	1	1	7.33	7.26	7.27	7.30	7.42	4.5
80M	CP QPSK	1	1	10.41	10.36	10.34	10.30	10.45	1.5
BW	MCS Index	Channel		506202	512400	518598	524802	531000	3GPP MPR
		Frequency (MHz)		2531.01	2562	2592.99	2624.01	2655	
70M	DFT-S PI/2 BPSK	1	1	11.87	11.78	11.93	11.86	11.86	0
70M	DFT-S QPSK	1	1	11.90	11.77	11.97	11.89	11.94	0
		1	95	11.78	11.83	11.91	11.93	11.88	0
		1	187	11.78	11.79	11.88	11.87	11.87	0
		90	0	10.93	10.84	10.78	10.82	10.86	1
		90	50	11.60	11.45	11.52	11.46	11.69	0
		90	99	10.86	10.76	10.84	10.78	10.95	1
		180	0	10.90	10.82	10.86	10.91	10.95	1
70M	DFT-S 16QAM	1	1	10.85	10.82	10.77	10.89	10.92	1
70M	DFT-S 64QAM	1	1	9.40	9.30	9.35	9.30	9.44	2.5
70M	DFT-S 256QAM	1	1	7.36	7.27	7.24	7.28	7.45	4.5
70M	CP QPSK	1	1	10.44	10.33	10.30	10.32	10.42	1.5

NR Conducted Power (Tablet Mode Reduction)									
NR Band 41_SA									
BW	MCS Index	Channel		505200	511896	518598	525294	531996	3GPP MPR
		Frequency (MHz)		2526	2559.48	2592.99	2626.48	2659.98	
60M	DFT-S PI/2 BPSK	1	1	11.90	11.78	11.87	11.79	11.94	0
60M	DFT-S QPSK	1	1	11.95	11.82	11.95	11.93	11.92	0
		1	81	11.87	11.81	11.88	11.85	11.85	0
		1	160	11.75	11.78	11.83	11.81	11.85	0
		81	0	10.93	10.89	10.86	10.79	10.79	1
		81	41	11.60	11.50	11.52	11.54	11.59	0
		81	81	10.83	10.79	10.91	10.79	10.86	1
162	0	10.91	10.92	10.81	10.87	10.93	1		
60M	DFT-S 16QAM	1	1	10.88	10.80	10.81	10.84	10.93	1
60M	DFT-S 64QAM	1	1	9.37	9.34	9.32	9.29	9.44	2.5
60M	DFT-S 256QAM	1	1	7.40	7.26	7.24	7.34	7.43	4.5
60M	CP QPSK	1	1	10.39	10.30	10.26	10.39	10.38	1.5
BW	MCS Index	Channel		504204	511404	518598	525798	532998	3GPP MPR
		Frequency (MHz)		2521.02	2557.02	2592.99	2628.99	2664.99	
50M	DFT-S PI/2 BPSK	1	1	11.93	11.86	11.87	11.76	11.96	0
50M	DFT-S QPSK	1	1	11.96	11.80	11.91	11.91	11.90	0
		1	67	11.83	11.79	11.84	11.94	11.88	0
		1	131	11.75	11.75	11.89	11.84	11.88	0
		64	0	10.96	10.91	10.82	10.73	10.89	1
		64	35	11.66	11.54	11.61	11.51	11.61	0
		64	69	10.91	10.73	10.88	10.75	10.93	1
128	0	10.83	10.86	10.87	10.85	10.91	1		
50M	DFT-S 16QAM	1	1	10.83	10.75	10.84	10.80	10.87	1
50M	DFT-S 64QAM	1	1	9.38	9.28	9.34	9.31	9.37	2.5
50M	DFT-S 256QAM	1	1	7.32	7.29	7.31	7.36	7.38	4.5
50M	CP QPSK	1	1	10.34	10.28	10.27	10.30	10.43	1.5

NR Conducted Power (Tablet Mode Reduction)

NR Band 41_SA

BW	MCS Index	Channel		503202	510900	518598	526296	534000	3GPP MPR
		Frequency (MHz)		2516.01	2554.5	2592.99	2631.48	2670	
40M	DFT-S PI/2 BPSK	1	1	11.88	11.85	11.84	11.78	11.91	0
40M	DFT-S QPSK	1	1	11.87	11.83	11.92	11.86	11.98	0
		1	53	11.83	11.78	11.86	11.87	11.85	0
		1	104	11.76	11.76	11.88	11.83	11.85	0
		50	0	10.90	10.87	10.79	10.74	10.80	1
		50	28	11.60	11.47	11.62	11.51	11.59	0
		50	56	10.87	10.79	10.92	10.74	10.90	1
		100	0	10.89	10.85	10.87	10.84	10.95	1
40M	DFT-S 16QAM	1	1	10.81	10.85	10.78	10.80	10.93	1
40M	DFT-S 64QAM	1	1	9.39	9.33	9.32	9.36	9.35	2.5
40M	DFT-S 256QAM	1	1	7.39	7.27	7.29	7.29	7.44	4.5
40M	CP QPSK	1	1	10.44	10.33	10.25	10.32	10.43	1.5

NR Conducted Power (Tablet Mode Reduction)									
NR Band 41_SA									
BW	MCS Index	Channel		501204	509898	518598	527298	535998	3GPP MPR
		Frequency (MHz)		2506.02	2549.49	2592.99	2636.49	2679.99	
20M	DFT-S PI/2 BPSK	1	1	11.93	11.86	11.94	11.86	11.94	0
20M	DFT-S QPSK	1	1	11.93	11.82	11.97	11.86	11.93	0
		1	26	11.81	11.83	11.90	11.95	11.88	0
		1	49	11.80	11.78	11.90	11.81	11.86	0
		25	0	10.90	10.90	10.83	10.81	10.83	1
		25	13	11.62	11.50	11.53	11.47	11.67	0
		25	26	10.88	10.80	10.92	10.81	10.89	1
		50	0	10.82	10.87	10.86	10.93	10.90	1
20M	DFT-S 16QAM	1	1	10.80	10.76	10.78	10.81	10.95	1
20M	DFT-S 64QAM	1	1	9.44	9.34	9.36	9.31	9.39	2.5
20M	DFT-S 256QAM	1	1	7.38	7.25	7.32	7.34	7.43	4.5
20M	CP QPSK	1	1	10.36	10.29	10.29	10.35	10.47	1.5
BW	MCS Index	Channel		500700	509646	518598	527544	536496	3GPP MPR
		Frequency (MHz)		2503.5	2548.23	2592.99	2637.72	2682.48	
15M	DFT-S PI/2 BPSK	1	1	11.87	11.77	11.84	11.78	11.86	0
15M	DFT-S QPSK	1	1	11.89	11.84	11.97	11.89	11.92	0
		1	19	11.83	11.78	11.94	11.95	11.94	0
		1	36	11.77	11.71	11.88	11.78	11.89	0
		18	0	10.94	10.86	10.76	10.73	10.83	1
		18	10	11.61	11.52	11.61	11.56	11.63	0
		18	20	10.87	10.83	10.88	10.74	10.93	1
		36	0	10.83	10.89	10.89	10.93	10.96	1
15M	DFT-S 16QAM	1	1	10.84	10.78	10.84	10.90	10.90	1
15M	DFT-S 64QAM	1	1	9.38	9.29	9.28	9.30	9.34	2.5
15M	DFT-S 256QAM	1	1	7.41	7.26	7.28	7.32	7.38	4.5
15M	CP QPSK	1	1	10.43	10.30	10.30	10.33	10.43	1.5

NR Conducted Power (Tablet Mode Reduction)									
NR Band 41_SA									
BW	MCS Index	Channel		500202	509400	518598	527796	537000	3GPP MPR
		Frequency (MHz)		2501.01	2547	2592.99	2638.98	2685	
10M	DFT-S PI/2 BPSK	1	1	11.87	11.78	11.87	11.78	11.93	0
10M	DFT-S QPSK	1	1	11.92	11.83	11.95	11.90	11.90	0
		1	11	11.77	11.76	11.84	11.95	11.85	0
		1	22	11.77	11.79	11.89	11.82	11.89	0
		12	0	10.94	10.90	10.79	10.80	10.83	1
		12	6	11.64	11.50	11.59	11.55	11.67	0
		12	12	10.84	10.77	10.92	10.79	10.92	1
		24	0	10.82	10.91	10.80	10.83	10.95	1
10M	DFT-S 16QAM	1	1	10.85	10.83	10.80	10.84	10.85	1
10M	DFT-S 64QAM	1	1	9.40	9.31	9.35	9.33	9.35	2.5
10M	DFT-S 256QAM	1	1	7.31	7.26	7.26	7.28	7.45	4.5
10M	CP QPSK	1	1	10.40	10.27	10.32	10.32	10.43	1.5

NR Conducted Power (Tablet Mode Reduction)									
NR Band 77_SA									
BW	MCS Index	RB Size	RB Offset	Low	Mid-1	Mid-2	Mid-3	High	3GPP MPR (dB)
		Channel		650000	653000	656000	659000	662000	
		Frequency (MHz)		3750	3795	3840	3885	3930	
100M	DFT-S PI/2 BPSK	1	1	10.09	10.18	10.21	10.31	10.26	0
100M	DFT-S QPSK	1	1	10.15	10.21	10.25	10.35	10.28	0
		1	137	10.13	10.18	10.20	10.32	10.23	0
		1	271	10.09	10.12	10.18	10.26	10.22	0
		135	0	9.24	9.24	9.34	9.38	9.34	1
		135	69	10.07	10.06	10.12	10.21	10.12	0
		135	138	9.11	9.21	9.26	9.32	9.31	1
270	0	9.09	9.15	9.18	9.28	9.23	1		
100M	DFT-S 16QAM	1	1	9.10	9.12	9.15	9.24	9.21	1
100M	DFT-S 64QAM	1	1	7.29	7.30	7.32	7.45	7.35	2.5
100M	DFT-S 256QAM	1	1	5.33	5.35	5.41	5.52	5.45	4.5
100M	CP QPSK	1	1	8.29	8.37	8.36	8.43	8.42	1.5
BW	MCS Index	Channel		649668	652834	656000	659166	662332	3GPP MPR
		Frequency (MHz)		3745.02	3792.51	3840	3887.49	3934.98	
90M	DFT-S PI/2 BPSK	1	1	10.08	10.17	10.21	10.19	10.21	0
90M	DFT-S QPSK	1	1	10.11	10.21	10.22	10.26	10.34	0
		1	123	10.09	10.12	10.17	10.23	10.32	0
		1	243	10.04	10.08	10.18	10.22	10.21	0
		120	0	9.17	9.23	9.30	9.33	9.31	1
		120	63	9.99	9.96	10.07	10.03	10.17	0
		120	125	9.11	9.16	9.21	9.26	9.29	1
243	0	8.99	9.12	9.09	9.14	9.19	1		
90M	DFT-S 16QAM	1	1	9.00	9.11	9.09	9.16	9.17	1
90M	DFT-S 64QAM	1	1	7.19	7.30	7.29	7.34	7.44	2.5
90M	DFT-S 256QAM	1	1	5.28	5.30	5.37	5.37	5.42	4.5
90M	CP QPSK	1	1	8.19	8.29	8.28	8.32	8.33	1.5


NR Conducted Power (Tablet Mode Reduction)									
NR Band 77_SA									
BW	MCS Index	Channel		649334	652666	656000	659334	662666	3GPP MPR
		Frequency (MHz)		3740.01	3789.99	3840	3890.01	3939.99	
80M	DFT-S PI/2 BPSK	1	1	10.07	10.14	10.20	10.20	10.26	0
80M	DFT-S QPSK	1	1	10.13	10.17	10.16	10.18	10.30	0
		1	109	10.06	10.08	10.20	10.15	10.26	0
		1	215	9.99	10.09	10.08	10.13	10.22	0
		108	0	9.21	9.15	9.26	9.27	9.30	1
		108	55	9.97	9.96	10.11	10.07	10.11	0
		108	109	9.06	9.17	9.25	9.28	9.29	1
216	0	8.99	9.06	9.13	9.22	9.22	1		
80M	DFT-S 16QAM	1	1	9.10	9.07	9.12	9.21	9.18	1
80M	DFT-S 64QAM	1	1	7.25	7.29	7.29	7.28	7.44	2.5
80M	DFT-S 256QAM	1	1	5.23	5.25	5.36	5.37	5.51	4.5
80M	CP QPSK	1	1	8.25	8.37	8.34	8.41	8.37	1.5
BW	MCS Index	Channel		649000	652500	656000	659500	663000	3GPP MPR
		Frequency (MHz)		3735	3787.5	3840	3892.5	3945	
70M	DFT-S PI/2 BPSK	1	1	10.01	10.13	10.11	10.21	10.23	0
70M	DFT-S QPSK	1	1	10.08	10.18	10.19	10.20	10.32	0
		1	95	10.05	10.05	10.20	10.20	10.25	0
		1	187	10.09	10.17	10.13	10.13	10.18	0
		90	0	9.19	9.23	9.28	9.32	9.30	1
		90	50	10.05	10.00	10.02	10.07	10.13	0
		90	99	9.12	9.19	9.15	9.28	9.27	1
180	0	9.05	9.15	9.09	9.21	9.21	1		
70M	DFT-S 16QAM	1	1	9.07	9.11	9.15	9.20	9.18	1
70M	DFT-S 64QAM	1	1	7.23	7.23	7.25	7.26	7.45	2.5
70M	DFT-S 256QAM	1	1	5.24	5.34	5.38	5.45	5.44	4.5
70M	CP QPSK	1	1	8.26	8.34	8.35	8.32	8.41	1.5

NR Conducted Power (Tablet Mode Reduction)									
NR Band 77_SA									
BW	MCS Index	Channel		648668	652334	656000	659666	663332	3GPP MPR
		Frequency (MHz)		3730.02	3785.01	3840	3894.99	3949.98	
60M	DFT-S PI/2 BPSK	1	1	10.08	10.15	10.21	10.21	10.23	0
60M	DFT-S QPSK	1	1	10.13	10.13	10.19	10.27	10.29	0
		1	81	10.05	10.14	10.13	10.23	10.25	0
		1	160	10.05	10.12	10.14	10.13	10.17	0
		81	0	9.17	9.19	9.33	9.27	9.38	1
		81	41	9.99	10.04	10.10	10.04	10.21	0
		81	81	9.10	9.12	9.25	9.21	9.27	1
162	0	9.08	9.11	9.12	9.21	9.26	1		
60M	DFT-S 16QAM	1	1	9.03	9.11	9.12	9.17	9.17	1
60M	DFT-S 64QAM	1	1	7.27	7.20	7.22	7.31	7.44	2.5
60M	DFT-S 256QAM	1	1	5.26	5.29	5.36	5.42	5.47	4.5
60M	CP QPSK	1	1	8.21	8.28	8.27	8.36	8.34	1.5
BW	MCS Index	Channel		648334	652166	656000	659834	663666	3GPP MPR
		Frequency (MHz)		3725.01	3782.49	3840	3897.51	3954.99	
50M	DFT-S PI/2 BPSK	1	1	10.02	10.14	10.15	10.22	10.28	0
50M	DFT-S QPSK	1	1	10.08	10.20	10.23	10.24	10.31	0
		1	67	10.08	10.10	10.13	10.17	10.22	0
		1	131	10.07	10.05	10.17	10.14	10.23	0
		64	0	9.21	9.15	9.26	9.25	9.30	1
		64	35	10.00	10.02	10.08	10.10	10.21	0
		64	69	9.10	9.14	9.24	9.31	9.28	1
128	0	9.04	9.13	9.09	9.14	9.27	1		
50M	DFT-S 16QAM	1	1	9.10	9.10	9.10	9.19	9.24	1
50M	DFT-S 64QAM	1	1	7.26	7.23	7.27	7.34	7.39	2.5
50M	DFT-S 256QAM	1	1	5.24	5.32	5.38	5.39	5.52	4.5
50M	CP QPSK	1	1	8.20	8.33	8.26	8.33	8.43	1.5

NR Conducted Power (Tablet Mode Reduction)									
NR Band 77_SA									
BW	MCS Index	Channel		648000	652000	656000	660000	664000	3GPP MPR
		Frequency (MHz)		3720	3780	3840	3900	3960	
40M	DFT-S PI/2 BPSK	1	1	10.00	10.16	10.13	10.18	10.28	0
40M	DFT-S QPSK	1	1	10.15	10.13	10.23	10.20	10.34	0
		1	53	10.10	10.08	10.10	10.20	10.30	0
		1	104	10.01	10.07	10.12	10.12	10.26	0
		50	0	9.15	9.22	9.32	9.26	9.37	1
		50	28	9.97	9.99	10.12	10.08	10.11	0
		50	56	9.01	9.13	9.18	9.23	9.22	1
100	0	9.08	9.13	9.08	9.20	9.26	1		
40M	DFT-S 16QAM	1	1	9.09	9.04	9.10	9.13	9.16	1
40M	DFT-S 64QAM	1	1	7.20	7.22	7.24	7.25	7.36	2.5
40M	DFT-S 256QAM	1	1	5.23	5.30	5.33	5.40	5.51	4.5
40M	CP QPSK	1	1	8.19	8.37	8.29	8.39	8.35	1.5
BW	MCS Index	Channel		647668	651834	656000	660166	664332	3GPP MPR
		Frequency (MHz)		3715.02	3777.51	3840	3902.49	3964.98	
30M	DFT-S PI/2 BPSK	1	1	10.02	10.18	10.14	10.16	10.23	0
30M	DFT-S QPSK	1	1	10.12	10.18	10.22	10.21	10.29	0
		1	39	10.12	10.16	10.16	10.22	10.29	0
		1	76	10.02	10.03	10.18	10.22	10.25	0
		36	0	9.18	9.15	9.26	9.31	9.32	1
		36	21	10.07	10.00	10.12	10.04	10.16	0
		36	42	9.06	9.16	9.17	9.22	9.25	1
75	0	8.99	9.11	9.08	9.16	9.18	1		
30M	DFT-S 16QAM	1	1	9.04	9.11	9.08	9.16	9.20	1
30M	DFT-S 64QAM	1	1	7.27	7.21	7.27	7.27	7.39	2.5
30M	DFT-S 256QAM	1	1	5.29	5.27	5.33	5.41	5.52	4.5
30M	CP QPSK	1	1	8.21	8.33	8.28	8.36	8.39	1.5

NR Conducted Power (Tablet Mode Reduction)

NR Band 77_SA



BW	MCS Index	Channel		647334	651666	656000	660266	664666	3GPP MPR
		Frequency (MHz)		3710.01	3774.99	3840	3903.99	3969.99	
20M	DFT-S PI/2 BPSK	1	1	10.09	10.12	10.21	10.17	10.22	0
20M	DFT-S QPSK	1	1	10.09	10.18	10.22	10.28	10.25	0
		1	26	10.04	10.10	10.14	10.16	10.31	0
		1	49	10.06	10.06	10.13	10.16	10.25	0
		25	0	9.17	9.18	9.27	9.29	9.31	1
		25	13	10.06	9.99	10.06	10.10	10.16	0
		25	26	9.01	9.12	9.26	9.27	9.28	1
		50	0	9.02	9.09	9.16	9.13	9.24	1
20M	DFT-S 16QAM	1	1	9.07	9.05	9.12	9.11	9.15	1
20M	DFT-S 64QAM	1	1	7.21	7.21	7.29	7.29	7.45	2.5
20M	DFT-S 256QAM	1	1	5.23	5.34	5.32	5.36	5.46	4.5
20M	CP QPSK	1	1	8.22	8.29	8.26	8.32	8.42	1.5

NR Conducted Power (Tablet Mode Reduction)									
NR Band 77_SA									
BW	MCS Index	Channel		647168	651584	656000	660416	664832	3GPP MPR
		Frequency (MHz)		3707.52	3773.76	3840	3906.24	3972.48	
15M	DFT-S PI/2 BPSK	1	1	10.01	10.12	10.14	10.21	10.28	0
15M	DFT-S QPSK	1	1	10.10	10.12	10.21	10.23	10.27	0
		1	19	10.04	10.12	10.13	10.15	10.27	0
		1	36	10.09	10.10	10.15	10.15	10.17	0
		18	0	9.18	9.18	9.34	9.31	9.33	1
		18	10	9.97	9.99	10.07	10.05	10.13	0
		18	20	9.08	9.11	9.22	9.30	9.32	1
36	0	9.05	9.10	9.17	9.14	9.28	1		
15M	DFT-S 16QAM	1	1	9.03	9.09	9.11	9.19	9.23	1
15M	DFT-S 64QAM	1	1	7.19	7.20	7.29	7.35	7.39	2.5
15M	DFT-S 256QAM	1	1	5.31	5.30	5.36	5.36	5.49	4.5
15M	CP QPSK	1	1	8.20	8.34	8.30	8.39	8.43	1.5
BW	MCS Index	Channel		647000	651500	656000	660500	665000	3GPP MPR
		Frequency (MHz)		3705	3772.5	3840	3907.5	3975	
10M	DFT-S PI/2 BPSK	1	1	10.09	10.17	10.20	10.16	10.26	0
10M	DFT-S QPSK	1	1	10.15	10.21	10.18	10.21	10.30	0
		1	11	10.10	10.09	10.15	10.20	10.28	0
		1	22	10.01	10.10	10.09	10.21	10.23	0
		12	0	9.19	9.15	9.27	9.25	9.29	1
		12	6	10.04	10.03	10.07	10.04	10.15	0
		12	12	9.09	9.13	9.24	9.31	9.26	1
24	0	8.99	9.08	9.09	9.18	9.22	1		
10M	DFT-S 16QAM	1	1	9.08	9.08	9.05	9.16	9.21	1
10M	DFT-S 64QAM	1	1	7.25	7.30	7.30	7.34	7.38	2.5
10M	DFT-S 256QAM	1	1	5.23	5.29	5.32	5.38	5.45	4.5
10M	CP QPSK	1	1	8.27	8.30	8.33	8.41	8.36	1.5

NR Conducted Power (Tablet Mode Reduction)							
NR Band 78_SA							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel			650000		
		Frequency (MHz)			3750		
100M	DFT-S PI/2 BPSK	1	1		10.41		0
100M	DFT-S QPSK	1	1		10.49		0
		1	137		10.38		0
		1	271		10.32		0
		135	0		9.48		1
		135	69		10.28		0
		135	138		9.42		1
		270	0		9.39		1
100M	DFT-S 16QAM	1	1		9.32		1
100M	DFT-S 64QAM	1	1		7.58		2.5
100M	DFT-S 256QAM	1	1		5.52		4.5
100M	CP QPSK	1	1		8.61		1.5
BW	MCS Index	Channel		649668	650000	650332	3GPP MPR
		Frequency (MHz)		3745.02	3750	3754.98	
90M	DFT-S PI/2 BPSK	1	1	10.24	10.37	10.27	0
90M	DFT-S QPSK	1	1	10.35	10.44	10.38	0
		1	123	10.22	10.36	10.26	0
		1	243	10.16	10.25	10.19	0
		120	0	9.26	9.38	9.31	1
		120	63	10.16	10.24	10.21	0
		120	125	9.26	9.42	9.34	1
		243	0	9.21	9.30	9.29	1
90M	DFT-S 16QAM	1	1	9.30	9.32	9.31	1
90M	DFT-S 64QAM	1	1	7.48	7.56	7.48	2.5
90M	DFT-S 256QAM	1	1	5.40	5.52	5.45	4.5
90M	CP QPSK	1	1	8.43	8.59	8.51	1.5


NR Conducted Power (Tablet Mode Reduction)							
NR Band 78_SA							
BW	MCS Index	Channel		649334	650000	650666	3GPP MPR
		Frequency (MHz)		3740.01	3750	3759.99	
80M	DFT-S PI/2 BPSK	1	1	10.27	10.28	10.20	0
80M	DFT-S QPSK	1	1	10.33	10.42	10.36	0
		1	109	10.18	10.31	10.22	0
		1	215	10.09	10.16	10.10	0
		108	0	9.22	9.32	9.26	1
		108	55	10.09	10.17	10.16	0
		108	109	9.24	9.41	9.28	1
		216	0	9.16	9.26	9.29	1
80M	DFT-S 16QAM	1	1	9.29	9.31	9.21	1
80M	DFT-S 64QAM	1	1	7.42	7.55	7.44	2.5
80M	DFT-S 256QAM	1	1	5.37	5.49	5.39	4.5
80M	CP QPSK	1	1	8.34	8.58	8.51	1.5
BW	MCS Index	Channel		649000		651000	3GPP MPR
		Frequency (MHz)		3735		3765	
70M	DFT-S PI/2 BPSK	1	1	10.21		10.23	0
70M	DFT-S QPSK	1	1	10.33		10.29	0
		1	95	10.17		10.24	0
		1	187	10.14		10.12	0
		90	0	9.24		9.31	1
		90	50	10.12		10.13	0
		90	99	9.22		9.31	1
		180	0	9.19		9.29	1
70M	DFT-S 16QAM	1	1	9.20		9.28	1
70M	DFT-S 64QAM	1	1	7.46		7.47	2.5
70M	DFT-S 256QAM	1	1	5.36		5.42	4.5
70M	CP QPSK	1	1	8.43		8.50	1.5

NR Conducted Power (Tablet Mode Reduction)							
NR Band 78_SA							
BW	MCS Index	Channel		648668	650000	651332	3GPP MPR
		Frequency (MHz)		3730.02	3750	3769.98	
60M	DFT-S PI/2 BPSK	1	1	10.17	10.29	10.26	0
60M	DFT-S QPSK	1	1	10.28	10.42	10.35	0
		1	81	10.18	10.35	10.20	0
		1	160	10.11	10.16	10.09	0
		81	0	9.16	9.30	9.23	1
		81	41	10.16	10.15	10.15	0
		81	81	9.16	9.42	9.32	1
		162	0	9.11	9.28	9.29	1
60M	DFT-S 16QAM	1	1	9.27	9.30	9.29	1
60M	DFT-S 64QAM	1	1	7.40	7.56	7.47	2.5
60M	DFT-S 256QAM	1	1	5.36	5.47	5.40	4.5
60M	CP QPSK	1	1	8.34	8.49	8.44	1.5
BW	MCS Index	Channel		648334	650000	651666	3GPP MPR
		Frequency (MHz)		3725.01	3750	3774.99	
50M	DFT-S PI/2 BPSK	1	1	10.23	10.30	10.27	0
50M	DFT-S QPSK	1	1	10.25	10.34	10.34	0
		1	67	10.18	10.36	10.24	0
		1	131	10.15	10.24	10.12	0
		64	0	9.26	9.38	9.30	1
		64	35	10.10	10.20	10.21	0
		64	69	9.24	9.38	9.32	1
		128	0	9.17	9.27	9.26	1
50M	DFT-S 16QAM	1	1	9.23	9.25	9.31	1
50M	DFT-S 64QAM	1	1	7.47	7.46	7.48	2.5
50M	DFT-S 256QAM	1	1	5.40	5.52	5.41	4.5
50M	CP QPSK	1	1	8.43	8.53	8.42	1.5

NR Conducted Power (Tablet Mode Reduction)							
NR Band 78_SA							
BW	MCS Index	Channel		648000	650000	652000	3GPP MPR
		Frequency (MHz)		3720	3750	3780	
40M	DFT-S PI/2 BPSK	1	1	10.15	10.33	10.17	0
40M	DFT-S QPSK	1	1	10.27	10.34	10.30	0
		1	53	10.22	10.27	10.19	0
		1	104	10.10	10.18	10.14	0
		50	0	9.19	9.33	9.30	1
		50	28	10.09	10.23	10.14	0
		50	56	9.23	9.32	9.34	1
100	0	9.16	9.22	9.20	1		
40M	DFT-S 16QAM	1	1	9.24	9.25	9.22	1
40M	DFT-S 64QAM	1	1	7.43	7.55	7.47	2.5
40M	DFT-S 256QAM	1	1	5.40	5.50	5.43	4.5
40M	CP QPSK	1	1	8.40	8.53	8.49	1.5
BW	MCS Index	Channel		647668	650000	652332	3GPP MPR
		Frequency (MHz)		3715.02	3750	3784.98	
30M	DFT-S PI/2 BPSK	1	1	10.23	10.37	10.26	0
30M	DFT-S QPSK	1	1	10.30	10.42	10.36	0
		1	39	10.19	10.35	10.26	0
		1	76	10.11	10.23	10.15	0
		36	0	9.23	9.32	9.30	1
		36	21	10.16	10.15	10.16	0
		36	42	9.17	9.40	9.32	1
75	0	9.15	9.26	9.23	1		
30M	DFT-S 16QAM	1	1	9.28	9.27	9.22	1
30M	DFT-S 64QAM	1	1	7.38	7.51	7.41	2.5
30M	DFT-S 256QAM	1	1	5.40	5.42	5.40	4.5
30M	CP QPSK	1	1	8.33	8.52	8.47	1.5

NR Conducted Power (Tablet Mode Reduction)

NR Band 78_SA



BW	MCS Index	Channel		647334	650000	652666	3GPP MPR
		Frequency (MHz)		3710.01	3750	3789.99	
20M	DFT-S PI/2 BPSK	1	1	10.26	10.36	10.17	0
20M	DFT-S QPSK	1	1	10.31	10.41	10.32	0
		1	26	10.12	10.28	10.24	0
		1	49	10.06	10.21	10.18	0
		25	0	9.19	9.38	9.27	1
		25	13	10.14	10.24	10.11	0
		25	26	9.18	9.40	9.32	1
		50	0	9.21	9.28	9.28	1
20M	DFT-S 16QAM	1	1	9.30	9.23	9.22	1
20M	DFT-S 64QAM	1	1	7.45	7.50	7.44	2.5
20M	DFT-S 256QAM	1	1	5.40	5.44	5.37	4.5
20M	CP QPSK	1	1	8.35	8.52	8.49	1.5

NR Conducted Power (Tablet Mode Reduction)							
NR Band 78_SA							
BW	MCS Index	Channel		647168	650000	652832	3GPP MPR
		Frequency (MHz)		3707.52	3750	3792.48	
15M	DFT-S PI/2 BPSK	1	1	10.23	10.30	10.19	0
15M	DFT-S QPSK	1	1	10.25	10.43	10.29	0
		1	19	10.16	10.26	10.17	0
		1	36	10.14	10.21	10.10	0
		18	0	9.16	9.29	9.22	1
		18	10	10.15	10.14	10.13	0
		18	20	9.24	9.33	9.26	1
36	0	9.13	9.24	9.19	1		
15M	DFT-S 16QAM	1	1	9.23	9.24	9.28	1
15M	DFT-S 64QAM	1	1	7.45	7.48	7.42	2.5
15M	DFT-S 256QAM	1	1	5.33	5.48	5.38	4.5
15M	CP QPSK	1	1	8.37	8.49	8.50	1.5
BW	MCS Index	Channel		647000	650000	653000	3GPP MPR
		Frequency (MHz)		3705	3750	3795	
10M	DFT-S PI/2 BPSK	1	1	10.18	10.28	10.23	0
10M	DFT-S QPSK	1	1	10.34	10.40	10.31	0
		1	11	10.12	10.32	10.24	0
		1	22	10.11	10.24	10.10	0
		12	0	9.18	9.38	9.30	1
		12	6	10.14	10.20	10.16	0
		12	12	9.18	9.35	9.32	1
24	0	9.12	9.23	9.22	1		
10M	DFT-S 16QAM	1	1	9.26	9.29	9.21	1
10M	DFT-S 64QAM	1	1	7.40	7.55	7.48	2.5
10M	DFT-S 256QAM	1	1	5.38	5.48	5.35	4.5
10M	CP QPSK	1	1	8.41	8.50	8.49	1.5

Downlink Carrier Aggregation Exclusion Table

Intra Band					Inter Band								
Contiguous	2CC Non-Contiguous	3CC Non-Contiguous	4CC Non-Contiguous	5CC Non-Contiguous	2 Bands / 2CC	2 Bands / 3CC	2 Bands / 4CC	2 Bands / 5CC	3 Bands / 3CC	3 Bands / 4CC	3 Bands / 5CC	4 Bands / 4CC	4 Bands / 5CC
	CA 2A-2A				CA 2A-12A CA 2A-20A CA 2A-66A CA 12A-30A CA 12A-66A CA 30A-66A CA 2A-14A CA 14A-30A CA 14A-66A	CA 2A-2A-12A CA 2A-2A-30A CA 2A-2A-66A CA 2A-2A-14A			CA 2A-12A-30A CA 2A-12A-66A CA 2A-30A-66A CA 12A-30A-66A	CA 2A-2A-12A-30A CA 2A-2A-12A-66A CA 2A-2A-30A-66A		CA 2A-12A-30A-66A	CA 2A-2A-12A-30A-66A
					CA 2A-13A CA 13A-48A CA 13A-66A CA 46A-48A	CA 13A-48A CA 13A-66A CA 13A-48A-48A			CA 2A-13A-48A CA 2A-13A-66A CA 13A-48A-66A CA 46A-48A-66A	CA 2A-13A-48A-48A CA 2A-13A-48A-66A CA 13A-48A-48A-66A		CA 2A-13A-48A-66A	CA 2A-13A-48A-48A-66A CA 2A-13A-48A-66A-66A
	CA 48A-48A				CA 2A-5A CA 2A-48A CA 5A-48A CA 5A-66A CA 48A-66A	CA 2A-48A-48A CA 5A-48A-48A CA 48A-48A-66A			CA 2A-5A-48A CA 2A-5A-66A CA 2A-48A-66A CA 5A-48A-66A	CA 2A-5A-48A-48A CA 2A-48A-48A-66A CA 5A-48A-48A-66A		CA 2A-5A-48A-66A	CA 2A-5A-48A-48A-66A
	CA 5B					CA 2A-5B CA 5B-30A CA 5B-66A				CA 2A-5B-30A CA 2A-5B-66A CA 5B-30A-66A			CA 2A-5B-30A-66A
	CA 66A-66A					CA 2A-66A-66A CA 12A-66A-66A CA 30A-66A-66A				CA 2A-12A-66A-66A CA 2A-30A-66A-66A CA 12A-30A-66A-66A			CA 2A-12A-30A-66A-66A
					CA 2A-13A CA 13A-48A CA 13A-66A CA 46A-48A	CA 13A-48A CA 13A-66A CA 13A-48A-48A			CA 2A-13A-48A CA 2A-13A-66A CA 13A-48A-66A CA 46A-48A-66A	CA 2A-13A-48A-48A CA 2A-13A-48A-66A CA 13A-48A-48A-66A		CA 2A-13A-48A-66A	CA 2A-13A-48A-48A-66A CA 2A-13A-48A-66A-66A
	CA 48C					CA 13A-48C CA 48C-66A CA 14A-66A-66A				CA 2A-48C-66A CA 13A-48C-66A CA 2A-14A-66A-66A CA 14A-30A-66A-66A		CA 2A-13A-48C	CA 2A-13A-48C-66A CA 2A-14A-30A-66A-66A CA 2A-5A-48C-66A
					CA 2A-4A CA 4A-5A CA 4A-30A CA 5A-30A CA 4A-12A				CA 2A-5A-48C CA 2A-4A-5A CA 2A-4A-30A CA 2A-5A-30A CA 4A-5A-30A CA 2A-4A-12A CA 4A-12A-30A CA 5A-30A-66A			CA 2A-4A-5A-30A CA 2A-4A-12A-30A CA 2A-5A-30A-66A	
	CA 66B				CA 2A-2A-5A CA 5A-66A-66A	CA 2A-2A-66B				CA 2A-2A-5A-66A CA 2A-5A-66A-66A CA 2A-5A-66B		CA 2A-2A-5A-66B	CA 2A-2A-5A-66B-66A
	CA 66C				CA 2A-66C CA 5A-66C	CA 2A-2A-66C				CA 2A-5A-66C		CA 2A-2A-5A-66C	CA 2A-2A-12A-66A-66A
					CA 2A-2A-13A CA 13A-66A-66A CA 13A-66B					CA 2A-2A-13A-66A CA 2A-13A-66A-66A CA 2A-13A-66B CA 2A-2A-14A-66A		CA 2A-2A-13A-66A CA 2A-2A-13A-66B CA 2A-2A-14A-66A	CA 2A-2A-13A-66A-66A CA 2A-2A-14A-66A-66A
	CA 48D	CA 48A-48C					CA 2A-46D CA 5A-46D CA 2A-48A-48C CA 2A-48D CA 5A-48D CA 5B-66A-66A CA 5B-66B CA 5B-66C CA 13A-48A-48C CA 14A-66A-66A-66A CA 2A-66A-66A-66A			CA 5A-48A-48C		CA 2A-5A-48A-48C CA 2A-5A-48D CA 2A-5B-66A-66A CA 2A-5B-66B CA 2A-5B-66C CA 2A-13A-48A-48C	CA 2A-5A-48A-48C-66A CA 2A-5A-48D-66A CA 2A-5B-66A-66A-66A CA 2A-5B-66B-66A CA 2A-5B-66C-66A CA 2A-13A-48A-48C-66A
		CA 66A-66A-66A				CA 2A-46A CA 46A-66A	CA 2A-46C CA 46A-66C-66A		CA 2A-46A-66A	CA 2A-46C-66A		CA 2A-46A-66C-66A	CA 2A-46A-48D CA 2A-46C-48C CA 46D-48A CA 48A-48C-66A CA 48D-66A
	CA 42D				CA 3A-19A		CA 19A-42D CA 46D-66A					CA 3A-19A-42D CA 5A-46D-66A CA 5A-48D-66A CA 13A-46D-66A CA 13A-48C-66B CA 13A-48C-66C CA 13A-48D-66A CA 46A-48D-66A CA 46C-48C-66A CA 46D-48A-66A CA 2A-13A-46D CA 2A-13A-48D CA 5A-48A-48C-66A CA 13A-48A-48C-66A	CA 3A-19A-42D-66A CA 5A-46D-66A-66A CA 5A-48D-66A-66A CA 13A-46D-66A-66A CA 13A-48C-66B-66A CA 13A-48C-66C-66A CA 13A-48D-66A-66A CA 46A-48D-66A-66A CA 46C-48C-66A-66A CA 46D-48A-66A-66A CA 2A-13A-46D-66A-66A CA 2A-13A-48D-66A-66A CA 5A-48A-48C-66A-66A CA 13A-48A-48C-66A-66A
						CA 2A-2A-4A				CA 2A-2A-4A-5A CA 2A-2A-4A-12A			CA 2A-2A-4A-5A-66A CA 2A-2A-4A-12A-66A
					CA 4A-71A CA 66A-71A	CA 2A-2A-71A			CA 2A-4A-71A				CA 2A-2A-4A-71A CA 2A-2A-46C CA 2A-2A-66A-71A CA 2A-4A-4A-5A
						CA 2A-4A-4A							

Downlink Carrier Aggregation Exclusion Table

Intra Band					Inter Band									
Contiguous	2CC Non-Contiguous	3CC Non-Contiguous	4CC Non-Contiguous	5CC Non-Contiguous	2 Bands / 2CC	2 Bands / 3CC	2 Bands / 4CC	2 Bands / 5CC	3 Bands / 3CC	3 Bands / 4CC	3 Bands / 5CC	4 Bands / 4CC	4 Bands / 5CC	
	CA 4A-4A					CA 4A-4A-5A CA 4A-4A-12A CA 4A-5B CA 5A-46C CA 12A-66C CA 13A-46C				CA 2A-4A-12A CA 2A-4A-5B CA 2A-5A-46C CA 2A-12A-66C CA 2A-13A-46C CA 2A-13A-66C CA 2A-46A-48C CA 2A-46C-48A CA 2A-66A-71A CA 2A-66C-71A CA 3A-19A-42C CA 4A-4A-12A-30A CA 5A-46C-66A CA 13A-46C-66A CA 13A-48A-66B CA 13A-48A-66C CA 46A-48C-66A CA 46C-48A-66A				
CA 42C					CA 2A-71A	CA 66A-66A-71A CA 66C-71A CA 19A-42C CA 4A-4A-30A			CA 2A-66A-71A					
						CA 48A-66B CA 48A-66C								
					CA 4A-7A CA 4A-13A CA 4A-28A CA 5A-46A CA 13A-46A CA 29A-30A				CA 2A-4A-7A CA 2A-4A-13A CA 2A-4A-28A CA 2A-5A-46A CA 2A-13A-46A CA 2A-29A-30A CA 2A-46A-48A CA 3A-5A-7A CA 3A-19A-42A CA 4A-7A-28A CA 4A-29A-30A CA 5A-46A-66A CA 13A-46A-66A					
CA 48E					CA 4A-46A			CA 2A-2A-46D CA 2A-46A-46D CA 2A-46C-46C CA 2A-46E CA 2A-48A-48D CA 2A-48C-48C CA 2A-48E CA 4A-46A-46D CA 4A-48E CA 5A-46E CA 5A-48A-48D CA 5A-48C-48C CA 5A-48E CA 5B-46D CA 13A-46E CA 13A-48C-48C CA 13A-48E CA 46A-46D-66A CA 46C-46C-66A CA 48C-48D CA 46C-66A-66A-66A CA 46D-48C CA 46D-66A-66A CA 46E-48A CA 46E-66A CA 48A-48C-66B CA 48A-48C-66C CA 48A-48D-66A CA 48C-48C-66A CA 48C-66A-66A-66A CA 48E-66A						
CA 2C						CA 2A-46A-46A CA 46A-46A-66A CA 2C-66A			CA 2A-2A-4A-4A CA 2A-46A-46A-66A CA 2C-66A-66A CA 4A-4A-5B CA 4A-46A-46C CA 4A-48D CA 4A-48D CA 5A-5A-66A-66A CA 5A-5A-66B CA 5A-5A-66C CA 5B-46C CA 30A-66A-66A-66A CA 30A-41D CA 30C-41C CA 41C-42C					
	CA 5A-5A					CA 5A-5A-66A								
CA 39C														
CA 41C						CA 46A-66A-66A CA 48A-66A-66A								
						CA 2A-2A-46A CA 4A-4A-13A								

Uplink Carrier Aggregation Scenarios Conducted Power (Full)

Configure	Combination	PCC							SCC							Measurement Power					
		Band	BW (MHz)	Modulation	RB Size	RB Offset	UL Channel	UL Frequency (MHz)	Band	BW (MHz)	Modulation	RB Size	RB Offset	UL Channel	UL Frequency (MHz)	Maximum Tune-up Power	Single Carrier Tx Power without UL-CA Active (dBm)	MPR Level (dB)	Tx Power with UL-CA Active (dBm)		
																			PCC	SCC	Total
Intra Band Contiguous	CA_5B	5	10	QPSK	1	0	20450	829	5	10	QPSK	1	49	20549	838.9	24.0	23.29	0-8.5	11.82	11.79	14.82
					1	49						24.0	23.23			0	20.21		20.18	23.21	
		5	10	QPSK	1	0	20476	831.6	5	10	QPSK	1	49	20575	841.5	24.0	23.21	0-8.5	11.85	11.82	14.85
					1	49						24.0	23.18			0	20.16		20.11	23.15	
		5	10	QPSK	1	0	20501	834.1	5	10	QPSK	1	49	20600	844	24.0	23.11	0-8.5	11.91	11.88	14.91
					1	49						24.0	23.08			0	20.03		20.01	23.03	
	CA_7C	7	20	QPSK	1	0	20850	2510	7	20	QPSK	1	99	21048	2529.8	24.0	23.09	0-8.5	11.98	11.91	14.96
					1	99						24.0	22.94			0	19.89		19.85	22.88	
		7	20	QPSK	1	0	21001	2525.1	7	20	QPSK	1	99	21199	2544.9	24.0	23.55	0-8.5	11.95	11.89	14.93
					1	99						24.0	23.22			0	20.05		20.01	23.04	
		7	20	QPSK	1	0	21152	2540.2	7	20	QPSK	1	99	21350	2560	24.0	23.16	0-8.5	11.94	11.92	14.94
					1	99						24.0	23.01			0	19.91		19.87	22.90	
	CA_38C	38	20	QPSK	1	0	37850	2580	38	20	QPSK	1	99	38048	2602.5	24.0	23.5	0-8.5	12.02	11.98	15.01
					1	99						24.0	23.46			0	20.42		20.38	23.41	
		38	20	QPSK	1	0	37901	2585.1	38	20	QPSK	1	99	38099	2604.9	24.0	23.54	0-8.5	12.13	12.05	15.10
					1	99						24.0	23.41			0	20.4		20.36	23.39	
		38	20	QPSK	1	0	37952	2590.2	38	20	QPSK	1	99	38150	2610	24.0	23.58	0-8.5	12.06	12.01	15.05
					1	99						24.0	23.43			0	20.38		20.33	23.37	
	CA_41C	41	20	QPSK	1	0	39750	2506	41	20	QPSK	1	99	39948	2525.8	24.0	23.83	0-8.5	12.06	12.01	15.05
					1	99						24.0	23.81			0	20.79		20.75	23.78	
		41	20	QPSK	1	0	40185	2549.5	41	20	QPSK	1	99	40383	2569.3	24.0	23.62	0-8.5	12.11	12.08	15.11
					1	99						24.0	23.55			0	20.53		20.47	23.51	
		41	20	QPSK	1	0	40620	2593	41	20	QPSK	1	99	40818	2612.8	24.0	23.97	0-8.5	12.07	11.98	15.04
					1	99						24.0	23.87			0	20.85		20.81	23.84	
		41	20	QPSK	1	0	41055	2636.5	41	20	QPSK	1	99	41253	2656.3	24.0	23.71	0-8.5	12.02	11.95	15.00
					1	99						24.0	23.65			0	20.62		20.58	23.61	
		41	20	QPSK	1	0	41292	2660.2	41	20	QPSK	1	99	41490	2680	24.0	23.6	0-8.5	12.06	11.91	15.00
					1	99						24.0	23.47			0	20.42		20.41	23.43	
	CA_48C	48	20	QPSK	1	0	55340	3560	48	20	QPSK	1	99	55538	3579.8	22.0	21.71	0-8.5	10.35	10.31	13.34
					1	99						22.0	21.62			0	18.63		18.55	21.60	
		48	20	QPSK	1	0	55830	3609	48	20	QPSK	1	99	55632	3589.2	22.0	21.71	0-8.5	10.42	10.38	13.41
					1	99						22.0	21.69			0	18.65		18.61	21.64	
		48	20	QPSK	1	0	56150	3641	48	20	QPSK	1	99	55952	3621.2	22.0	21.47	0-8.5	10.33	10.25	13.30
					1	99						22.0	21.45			0	18.4		18.33	21.38	
	48	20	QPSK	1	0	56640	3550	48	20	QPSK	1	99	56442	3670.2	22.0	21.88	0-8.5	10.51	10.47	13.50	
				1	99						22.0	21.84			0	18.82		18.79	21.82		
	CA_66B	66	10	QPSK	1	0	132022	1715	66	10	QPSK	1	49	132121	1724.9	24.0	23.38	0-8.5	12.32	12.28	15.31
					1	49						24.0	23.35			0	20.32		20.25	23.30	
		66	10	QPSK	1	0	132373	1750.1	66	10	QPSK	1	49	132472	1760	24.0	23.47	0-8.5	12.41	12.35	15.39
					1	49						24.0	23.41			0	20.38		20.35	23.38	
		66	10	QPSK	1	0	132523	1765.1	66	10	QPSK	1	49	132622	1775	24.0	23.26	0-8.5	12.22	12.17	15.21
					1	49						24.0	23.22			0	20.21		20.13	23.18	
	CA_66C	66	20	QPSK	1	0	132072	1720	66	20	QPSK	1	99	132270	1739.8	24.0	23.41	0-8.5	12.41	12.35	15.39
					1	99						24.0	23.43			0	20.41		20.39	23.41	
		66	20	QPSK	1	0	132323	1745.1	66	20	QPSK	1	99	132521	1764.9	24.0	23.47	0-8.5	12.38	12.31	15.36
					1	99						24.0	23.4			0	20.35		20.28	23.33	
		66	20	QPSK	1	0	132374	1750.2	66	20	QPSK	1	99	132572	1770	24.0	23.28	0-8.5	12.35	12.33	15.35
					1	99						24.0	23.21			0	20.19		20.11	23.16	

Uplink Carrier Aggregation Scenarios Conducted Power (Full)

Configure	Combination	PCC								SCC						Measurement Power					
		Band	BW (MHz)	Modulation	RB Size	RB Offset	UL Channel	UL Frequency (MHz)	Band	BW (MHz)	Modulation	RB Size	RB Offset	UL Channel	UL Frequency (MHz)	Maximum Tune-up Power	Single Carrier Tx Power without UL-CA Active (dBm)	MPR Level (dB)	Tx Power with UL-CA Active (dBm)		
																			PCC	SCC	Total
Inter Band	CA_2A-5A	2	20	QPSK	1	0	18700	1860	5	10	QPSK	1	49	20525	836.5	24.0	23.16	0-8.5	12.38	12.31	15.36
					1	99						24.0	22.98			0	19.95		19.91	22.94	
		2	20	QPSK	1	0	18900	1880	5	10	QPSK	1	49	20525	836.5	24.0	23.1	0-8.5	12.28	12.22	15.26
					1	99						24.0	22.9			0	19.85		19.79	22.83	
		2	20	QPSK	1	0	19100	1900	5	10	QPSK	1	49	20525	836.5	24.0	23.01	0-8.5	12.25	12.19	15.23
					1	99						24.0	22.75			0	19.67		19.62	22.66	
	CA_2A-12A	2	20	QPSK	1	0	18700	1860	12	10	QPSK	1	49	23095	707.5	24.0	23.16	0-8.5	12.33	12.28	15.32
					1	99						24.0	22.98			0	19.96		19.91	22.95	
		2	20	QPSK	1	0	18900	1880	12	10	QPSK	1	49	23095	707.5	24.0	23.1	0-8.5	12.35	12.29	15.33
					1	99						24.0	22.9			0	19.85		19.82	22.85	
		2	20	QPSK	1	0	19100	1900	12	10	QPSK	1	49	23095	707.5	24.0	23.01	0-8.5	12.52	12.42	15.48
					1	99						24.0	22.75			0	19.71		19.68	22.71	
	CA_2A-13A	2	20	QPSK	1	0	18700	1860	13	10	QPSK	1	49	23230	782	24.0	23.16	0-8.5	12.47	12.41	15.45
					1	99						24.0	22.98			0	19.92		19.88	22.91	
		2	20	QPSK	1	0	18900	1880	13	10	QPSK	1	49	23230	782	24.0	23.1	0-8.5	12.43	12.38	15.42
					1	99						24.0	22.9			0	19.85		19.79	22.83	
		2	20	QPSK	1	0	19100	1900	13	10	QPSK	1	49	23230	782	24.0	23.01	0-8.5	12.36	12.31	15.35
					1	99						24.0	22.75			0	19.71		19.63	22.68	
	CA_2A-14A	2	20	QPSK	1	0	18700	1860	14	10	QPSK	1	49	23330	793	24.0	23.16	0-8.5	12.42	12.36	15.40
					1	99						24.0	22.98			0	19.91		19.85	22.89	
		2	20	QPSK	1	0	18900	1880	14	10	QPSK	1	49	23330	793	24.0	23.1	0-8.5	12.35	12.29	15.33
					1	99						24.0	22.9			0	19.89		19.81	22.86	
		2	20	QPSK	1	0	19100	1900	14	10	QPSK	1	49	23330	793	24.0	23.01	0-8.5	12.39	12.31	15.36
					1	99						24.0	22.75			0	19.71		18.65	22.22	
	CA_2A-48A	2	20	QPSK	1	0	18700	1860	48	20	QPSK	1	99	56210	3647	24.0	23.16	0-8.5	12.47	12.43	15.46
					1	99						24.0	22.98			0	19.85		19.81	22.84	
		2	20	QPSK	1	0	18900	1880	48	20	QPSK	1	99	56210	3647	24.0	23.1	0-8.5	12.42	12.36	15.40
					1	99						24.0	22.9			0	19.83		19.79	22.82	
		2	20	QPSK	1	0	18900	1880	48	20	QPSK	1	99	56210	3647	24.0	23.01	0-8.5	12.44	12.41	15.44
					1	99						24.0	22.75			0	19.72		19.68	22.71	
	CA_4A-5A	4	20	QPSK	1	0	20050	1720	5	10	QPSK	1	49	20525	836.5	24.0	23.37	0-8.5	12.36	12.33	15.36
					1	99						24.0	23.23			0	20.21		20.17	23.20	
		4	20	QPSK	1	0	20175	1732.5	5	10	QPSK	1	49	20525	836.5	24.0	23.28	0-8.5	12.38	12.35	15.38
					1	99						24.0	23.26			0	20.18		20.15	23.18	
		4	20	QPSK	1	0	20300	1745	5	10	QPSK	1	49	20525	836.5	24.0	23.24	0-8.5	12.41	12.31	15.37
					1	99						24.0	23.22			0	20.13		20.11	23.13	
	CA_4A-12A	4	20	QPSK	1	0	20050	1720	12	10	QPSK	1	49	23095	707.5	24.0	23.37	0-8.5	12.22	12.17	15.21
					1	99						24.0	23.23			0	20.21		20.18	23.21	
		4	20	QPSK	1	0	20175	1732.5	12	10	QPSK	1	49	23095	707.5	24.0	23.28	0-8.5	12.21	12.15	15.19
					1	99						24.0	23.26			0	20.22		20.17	23.21	
		4	20	QPSK	1	0	20300	1745	12	10	QPSK	1	49	23095	707.5	24.0	23.24	0-8.5	12.17	12.11	15.15
					1	99						24.0	23.22			0	20.18		20.15	23.18	
	CA_4A-13A	4	20	QPSK	1	0	20050	1720	13	10	QPSK	1	49	23230	782	24.0	23.37	0-8.5	12.15	12.06	15.12
					1	99						24.0	23.23			0	20.19		20.15	23.18	
		4	20	QPSK	1	0	20175	1732.5	13	10	QPSK	1	49	23230	782	24.0	23.28	0-8.5	12.06	12.01	15.05
					1	99						24.0	23.26			0	20.22		20.21	23.23	
		4	20	QPSK	1	0	20300	1745	13	10	QPSK	1	49	23230	782	24.0	23.24	0-8.5	12.07	12.02	15.06
					1	99						24.0	23.22			0	20.17		20.13	23.16	

Uplink Carrier Aggregation Scenarios Conducted Power (Full)

Configure	Combination	PCC								SCC						Measurement Power					
		Band	BW (MHz)	Modulation	RB Size	RB Offset	UL Channel	UL Frequency (MHz)	Band	BW (MHz)	Modulation	RB Size	RB Offset	UL Channel	UL Frequency (MHz)	Maximum Tune-up Power	Single Carrier Tx Power without UL-CA Active (dBm)	MPR Level (dB)	Tx Power with UL-CA Active (dBm)		
																			PCC	SCC	Total
Inter Band	CA_5A-7A	5	10	QPSK	1	0	20450	829	7	20	QPSK	1	99	21100	2535	24.0	23.29	0-8.5	12.13	12.08	15.12
					1	49						24.0	23.23			0	20.22		20.17	23.21	
		5	10	QPSK	1	0	20525	836.5	7	20	QPSK	1	99	21100	2535	24.0	23.24	0-8.5	12.08	12.05	15.08
					1	49						24.0	23.21			0	20.17		20.14	23.17	
		5	10	QPSK	1	0	20600	844	7	20	QPSK	1	99	21100	2535	24.0	23.14	0-8.5	12.04	11.98	15.02
					1	49						24.0	23.1			0	20.06		20.02	23.05	
	CA_5A-30A	5	10	QPSK	1	0	20450	829	30	10	QPSK	1	49	27710	2310	24.0	23.29	0-8.5	12.13	12.09	15.12
					1	49						24.0	23.23			0	20.21		20.17	23.20	
		5	10	QPSK	1	0	20525	836.5	30	10	QPSK	1	49	27710	2310	24.0	23.24	0-8.5	12.05	12.01	15.04
					1	49						24.0	23.21			0	20.19		20.16	23.19	
		5	10	QPSK	1	0	20600	844	30	10	QPSK	1	49	27710	2310	24.0	23.14	0-8.5	12.07	12.06	15.08
					1	49						24.0	23.1			0	20.05		20.01	23.04	
	CA_5A-48A	5	10	QPSK	1	0	20450	829	48	20	QPSK	1	99	56210	3647	24.0	23.29	0-8.5	12.03	11.98	15.02
					1	49						24.0	23.23			0	20.19		20.13	23.17	
		5	10	QPSK	1	0	20525	836.5	48	20	QPSK	1	99	56210	3647	24.0	23.24	0-8.5	12.22	12.17	15.21
					1	49						24.0	23.21			0	20.15		20.11	23.14	
		5	10	QPSK	1	0	20600	844	48	20	QPSK	1	99	56210	3647	24.0	23.14	0-8.5	12.12	12.05	15.10
					1	49						24.0	23.1			0	20.05		20.01	23.04	
	CA_5A-66A	5	10	QPSK	1	0	20450	829	66	20	QPSK	1	99	132322	1745	24.0	23.29	0-8.5	12.28	12.06	15.18
					1	49						24.0	23.23			0	20.17		20.15	23.17	
		5	10	QPSK	1	0	20525	836.5	66	20	QPSK	1	99	132322	1745	24.0	23.24	0-8.5	12.26	12.22	15.25
					1	49						24.0	23.21			0	20.16		20.12	23.15	
		5	10	QPSK	1	0	20600	844	66	20	QPSK	1	99	132322	1745	24.0	23.14	0-8.5	12.21	12.17	15.20
					1	49						24.0	23.1			0	20.01		19.98	23.01	
	CA_12A-30A	12	10	QPSK	1	0	23060	704	30	10	QPSK	1	49	27710	2310	24.0	23.61	0-8.5	12.05	11.98	15.03
					1	49						24.0	23.32			0	20.28		20.22	23.26	
		12	10	QPSK	1	0	23095	707.5	30	10	QPSK	1	49	27710	2310	24.0	23.64	0-8.5	12.08	12.01	15.06
					1	49						24.0	23.49			0	20.47		20.42	23.46	
		12	10	QPSK	1	0	23130	711	30	10	QPSK	1	49	27710	2310	24.0	23.63	0-8.5	12.01	11.95	14.99
					1	49						24.0	23.39			0	20.36		20.33	23.36	
	CA_12A-66A	12	10	QPSK	1	0	23060	704	66	20	QPSK	1	99	132322	1745	24.0	23.61	0-8.5	12.06	12.02	15.05
					1	49						24.0	23.32			0	20.28		20.21	23.26	
		12	10	QPSK	1	0	23095	707.5	66	20	QPSK	1	99	132322	1745	24.0	23.64	0-8.5	12.09	12.06	15.09
					1	49						24.0	23.49			0	20.42		20.39	23.42	
		12	10	QPSK	1	0	23130	711	66	20	QPSK	1	99	132322	1745	24.0	23.63	0-8.5	12.04	12.01	15.04
					1	49						24.0	23.39			0	20.32		20.28	23.31	
	CA_13A-48A	13	10	QPSK	1	0	23230	782	48	20	QPSK	1	99	56210	3647	24.0	23.42	0-8.5	12.16	12.09	15.14
					1	49						24.0	23.38			0	20.35		20.29	23.33	
	CA_13A-66A	13	10	QPSK	1	0	23230	782	66	20	QPSK	1	99	132322	1745	24.0	23.42	0-8.5	12.08	12.05	15.08
					1	49						24.0	23.38			0	20.36		20.33	23.36	
	CA_14A-30A	14	10	QPSK	1	0	23330	793	30	10	QPSK	1	49	27710	2310	24.0	23.37	0-8.5	12.11	12.08	15.11
					1	99						24.0	23.21			0	20.17		20.11	23.15	
	CA_14A-66A	14	10	QPSK	1	0	23330	793	66	20	QPSK	1	99	132322	1745	24.0	23.37	0-8.5	12.23	12.17	15.21
					1	99						24.0	23.21			0	20.2		20.13	23.18	
	CA_48A-66A	48	20	QPSK	1	0	55340	3560	66	20	QPSK	1	99	132322	1745	22.0	21.71	0-8.5	10.42	10.38	13.41
					1	99						22.0	21.62			0	18.61		18.55	21.59	
		48	20	QPSK	1	0	55780	3603	66	20	QPSK	1	99	132322	1745	22.0	21.73	0-8.5	10.39	10.33	13.37
					1	99						22.0	21.73			0	18.63		18.59	21.62	
48		20	QPSK	1	0	56210	3647	66	20	QPSK	1	99	132322	1745	22.0	21.52	0-8.5	10.47	10.41	13.45	
				1	99						22.0	21.47			0	18.46		18.44	21.46		
48		20	QPSK	1	0	56640	3690	66	20	QPSK	1	99	132322	1745	22.0	21.88	0-8.5	10.52	10.48	13.51	
				1	99						22.0	21.84			0	18.79		18.77	21.79		

Uplink Carrier Aggregation Scenarios Conducted Power (Reduction) - Laptop

Configure	Combination	PCC							SCC							Measurement Power					
		Band	BW (MHz)	Modulation	RB Size	RB Offset	UL Channel	UL Frequency (MHz)	Band	BW (MHz)	Modulation	RB Size	RB Offset	UL Channel	UL Frequency (MHz)	Maximum Tune-up Power	Single Carrier Tx Power without UL-CA Active (dBm)	MPR Level (dB)	Tx Power with UL-CA Active (dBm)		
																			PCC	SCC	Total
Intra Band Contiguous	CA_5B	5	10	QPSK	1	0	20450	829	5	10	QPSK	1	49	20549	838.9	19.5	19.19	0-8.5	16.02	15.96	19.00
					1	49						19.5	19.08			0	16.01	15.91	18.97		
		5	10	QPSK	1	0	20476	831.6	5	10	QPSK	1	49	20575	841.5	19.5	19.05	0-8.5	15.95	15.81	18.89
					1	49						19.5	19.01			0	15.91	15.85	18.89		
		5	10	QPSK	1	0	20501	834.1	5	10	QPSK	1	49	20600	844	19.5	18.98	0-8.5	15.89	15.86	18.89
					1	49						19.5	18.96			0	15.81	15.77	18.80		
	CA_7C	7	20	QPSK	1	0	20850	2510	7	20	QPSK	1	99	21048	2529.8	17.5	17.32	0-8.5	14.28	14.22	17.26
					1	99						17.5	17.33			0	14.25	14.19	17.23		
		7	20	QPSK	1	0	21001	2525.1	7	20	QPSK	1	99	21199	2544.9	17.5	17.39	0-8.5	14.31	14.17	17.25
					1	99						17.5	17.35			0	14.22	14.13	17.19		
		7	20	QPSK	1	0	21152	2540.2	7	20	QPSK	1	99	21350	2560	17.5	17.33	0-8.5	14.19	14.08	17.15
					1	99						17.5	17.25			0	14.11	14.05	17.09		
	CA_38C	38	20	QPSK	1	0	37850	2580	38	20	QPSK	1	99	38048	2602.5	20.5	20.19	0-8.5	17.03	16.98	20.02
					1	99						20.5	20.22			0	17.01	16.85	19.94		
		38	20	QPSK	1	0	37901	2585.1	38	20	QPSK	1	99	38099	2604.9	20.5	20.25	0-8.5	17.13	16.91	20.03
					1	99						20.5	20.13			0	17.05	16.82	19.95		
		38	20	QPSK	1	0	37952	2590.2	38	20	QPSK	1	99	38150	2610	20.5	20.29	0-8.5	17.11	16.97	20.05
					1	99						20.5	20.22			0	17.03	16.94	20.00		
	CA_41C	41	20	QPSK	1	0	39750	2506	41	20	QPSK	1	99	39948	2525.8	17.5	17.42	0-8.5	14.38	14.35	17.38
					1	99						17.5	17.31			0	14.24	14.22	17.24		
		41	20	QPSK	1	0	40185	2549.5	41	20	QPSK	1	99	40383	2569.3	17.5	17.2	0-8.5	14.11	14.05	17.09
					1	99						17.5	17.13			0	14.05	14.01	17.04		
		41	20	QPSK	1	0	40620	2593	41	20	QPSK	1	99	40818	2612.8	17.5	17.45	0-8.5	14.32	14.22	17.28
					1	99						17.5	17.35			0	14.31	14.21	17.27		
		41	20	QPSK	1	0	41055	2636.5	41	20	QPSK	1	99	41253	2656.3	17.5	17.31	0-8.5	14.24	14.14	17.20
					1	99						17.5	17.23			0	14.17	14.09	17.14		
		41	20	QPSK	1	0	41292	2660.2	41	20	QPSK	1	99	41490	2680	17.5	17.35	0-8.5	14.21	14.14	17.19
					1	99						17.5	17.33			0	14.23	14.09	17.17		
	CA_48C	48	20	QPSK	1	0	55340	3560	48	20	QPSK	1	99	55538	3579.8	18.0	17.76	0-8.5	14.63	14.55	17.60
					1	99						18.0	17.73			0	14.68	14.51	17.61		
		48	20	QPSK	1	0	55830	3609	48	20	QPSK	1	99	55632	3589.2	18.0	17.69	0-8.5	14.61	14.53	17.58
					1	99						18.0	17.65			0	14.62	14.58	17.61		
		48	20	QPSK	1	0	56150	3641	48	20	QPSK	1	99	55952	3621.2	18.0	17.71	0-8.5	14.63	14.51	17.58
					1	99						18.0	17.69			0	14.56	14.47	17.53		
	48	20	QPSK	1	0	56640	3550	48	20	QPSK	1	99	56442	3670.2	18.0	17.78	0-8.5	14.61	14.53	17.58	
				1	99						18.0	17.72			0	14.58	14.51	17.56			
	CA_66B	66	10	QPSK	1	0	132022	1715	66	10	QPSK	1	49	132121	1724.9	16.5	16.03	0-8.5	12.95	12.85	15.91
					1	49						16.5	15.95			0	12.91	12.88	15.91		
		66	10	QPSK	1	0	132373	1750.1	66	10	QPSK	1	49	132472	1760	16.5	16.25	0-8.5	13.01	12.91	15.97
					1	49						16.5	16.11			0	12.95	12.87	15.92		
		66	10	QPSK	1	0	132523	1765.1	66	10	QPSK	1	49	132622	1775	16.5	16.22	0-8.5	13.03	12.86	15.96
					1	49						16.5	16.19			0	12.99	12.91	15.96		
	CA_66C	66	20	QPSK	1	0	132072	1720	66	20	QPSK	1	99	132270	1739.8	16.5	16.05	0-8.5	13.01	12.98	16.01
					1	99						16.5	15.97			0	12.91	12.85	15.89		
		66	20	QPSK	1	0	132323	1745.1	66	20	QPSK	1	99	132521	1764.9	16.5	16.24	0-8.5	12.95	12.91	15.94
					1	99						16.5	16.12			0	12.89	12.84	15.88		
		66	20	QPSK	1	0	132374	1750.2	66	20	QPSK	1	99	132572	1770	16.5	16.23	0-8.5	12.91	12.85	15.89
					1	99						16.5	16.14			0	12.88	12.81	15.86		

Uplink Carrier Aggregation Scenarios Conducted Power (Reduction) - Laptop

Configure	Combination	PCC							SCC							Measurement Power					
		Band	BW (MHz)	Modulation	RB Size	RB Offset	UL Channel	UL Frequency (MHz)	Band	BW (MHz)	Modulation	RB Size	RB Offset	UL Channel	UL Frequency (MHz)	Maximum Tune-up Power	Single Carrier Tx Power without UL-CA Active (dBm)	MPR Level (dB)	Tx Power with UL-CA Active (dBm)		
																			PCC	SCC	Total
Inter Band	CA_2A-5A	2	20	QPSK	1	0	18700	1860	5	10	QPSK	1	49	20525	836.5	16	15.97	0-8.5	12.91	12.87	15.90
					1	99						16	15.89			0	12.85	12.71	15.79		
		2	20	QPSK	1	0	18900	1880	5	10	QPSK	1	49	20525	836.5	16	15.95	0-8.5	12.89	12.74	15.83
					1	99						16	15.86			0	12.81	12.73	15.78		
		2	20	QPSK	1	0	19100	1900	5	10	QPSK	1	49	20525	836.5	16	15.8	0-8.5	12.71	12.65	15.69
					1	99						16	15.78			0	12.65	12.61	15.64		
	CA_2A-12A	2	20	QPSK	1	0	18700	1860	12	10	QPSK	1	49	23095	707.5	16	15.97	0-8.5	12.86	12.71	15.80
					1	99						16	15.89			0	12.76	12.71	15.75		
		2	20	QPSK	1	0	18900	1880	12	10	QPSK	1	49	23095	707.5	16	15.95	0-8.5	12.89	12.82	15.87
					1	99						16	15.86			0	12.81	12.77	15.80		
		2	20	QPSK	1	0	19100	1900	12	10	QPSK	1	49	23095	707.5	16	15.8	0-8.5	12.73	12.63	15.69
					1	99						16	15.78			0	12.69	12.61	15.66		
	CA_2A-13A	2	20	QPSK	1	0	18700	1860	13	10	QPSK	1	49	23230	782	16	15.97	0-8.5	12.89	12.73	15.82
					1	99						16	15.89			0	12.73	12.61	15.68		
		2	20	QPSK	1	0	18900	1880	13	10	QPSK	1	49	23230	782	16	15.95	0-8.5	12.82	12.71	15.78
					1	99						16	15.86			0	12.74	12.69	15.73		
		2	20	QPSK	1	0	19100	1900	13	10	QPSK	1	49	23230	782	16	15.8	0-8.5	12.71	12.65	15.69
					1	99						16	15.78			0	12.69	12.66	15.69		
	CA_2A-14A	2	20	QPSK	1	0	18700	1860	14	10	QPSK	1	49	23330	793	16	15.97	0-8.5	12.91	12.85	15.89
					1	99						16	15.89			0	12.81	12.79	15.81		
		2	20	QPSK	1	0	18900	1880	14	10	QPSK	1	49	23330	793	16	15.95	0-8.5	12.89	12.84	15.88
					1	99						16	15.86			0	12.84	12.81	15.84		
		2	20	QPSK	1	0	19100	1900	14	10	QPSK	1	49	23330	793	16	15.8	0-8.5	12.71	12.77	15.75
					1	99						16	15.78			0	12.69	12.75	15.73		
	CA_2A-48A	2	20	QPSK	1	0	18700	1860	48	20	QPSK	1	99	56210	3647	16	15.97	0-8.5	12.85	12.79	15.83
					1	99						16	15.89			0	12.73	12.71	15.73		
		2	20	QPSK	1	0	18900	1880	48	20	QPSK	1	99	56210	3647	16	15.95	0-8.5	12.81	12.75	15.79
					1	99						16	15.86			0	12.79	12.72	15.77		
		2	20	QPSK	1	0	19100	1900	48	20	QPSK	1	99	56210	3647	16	15.8	0-8.5	12.71	12.68	15.71
					1	99						16	15.78			0	12.75	12.66	15.72		
	CA_4A-5A	4	20	QPSK	1	0	20050	1720	5	10	QPSK	1	49	20525	836.5	16.5	16.36	0-8.5	13.28	13.22	16.26
					1	99						16.5	16.27			0	13.22	13.17	16.21		
		4	20	QPSK	1	0	20175	1732.5	5	10	QPSK	1	49	20525	836.5	16.5	16.3	0-8.5	13.21	13.14	16.19
					1	99						16.5	16.18			0	13.12	13.05	16.10		
		4	20	QPSK	1	0	20300	1745	5	10	QPSK	1	49	20525	836.5	16.5	16.25	0-8.5	13.17	13.06	16.13
					1	99						16.5	16.2			0	13.09	13.01	16.06		
	CA_4A-12A	4	20	QPSK	1	0	20050	1720	12	10	QPSK	1	49	23095	707.5	16.5	16.36	0-8.5	13.22	13.17	16.21
					1	99						16.5	16.27			0	13.14	13.08	16.12		
		4	20	QPSK	1	0	20175	1732.5	12	10	QPSK	1	49	23095	707.5	16.5	16.3	0-8.5	13.23	13.21	16.23
					1	99						16.5	16.18			0	13.12	13.07	16.11		
		4	20	QPSK	1	0	20300	1745	12	10	QPSK	1	49	23095	707.5	16.5	16.25	0-8.5	13.09	13.06	16.09
					1	99						16.5	16.2			0	13.06	13.01	16.05		
	CA_4A-13A	4	20	QPSK	1	0	20050	1720	13	10	QPSK	1	49	23230	782	16.5	16.36	0-8.5	13.18	13.04	16.12
					1	99						16.5	16.27			0	13.06	12.98	16.03		
		4	20	QPSK	1	0	20175	1732.5	13	10	QPSK	1	49	23230	782	16.5	16.3	0-8.5	13.22	13.05	16.15
					1	99						16.5	16.18			0	13.14	13.01	16.09		
		4	20	QPSK	1	0	20300	1745	13	10	QPSK	1	49	23230	782	16.5	16.25	0-8.5	13.23	13.05	16.15
					1	99						16.5	16.2			0	13.09	13.01	16.06		

Uplink Carrier Aggregation Scenarios Conducted Power (Reduction) - Laptop

Configure	Combination	PCC							SCC							Measurement Power					
		Band	BW (MHz)	Modulation	RB Size	RB Offset	UL Channel	UL Frequency (MHz)	Band	BW (MHz)	Modulation	RB Size	RB Offset	UL Channel	UL Frequency (MHz)	Maximum Tune-up Power	Single Carrier Tx Power without UL-CA Active (dBm)	MPR Level (dB)	Tx Power with UL-CA Active (dBm)		
																			PCC	SCC	Total
Inter Band	CA_5A-7A	5	10	QPSK	1	0	20450	829	7	20	QPSK	1	99	21100	2535	19.5	19.19	0-8.5	16.05	15.91	18.99
					1	49						1	0			19.5	19.08	0	16.01	15.89	18.96
		5	10	QPSK	1	0	20525	836.5	7	20	QPSK	1	99	21100	2535	19.5	19.07	0-8.5	16.03	15.83	18.94
					1	49						1	0			19.5	19.02	0	15.95	15.81	18.89
		5	10	QPSK	1	0	20600	844	7	20	QPSK	1	99	21100	2535	19.5	19	0-8.5	15.91	15.85	18.89
					1	49						1	0			19.5	18.98	0	15.89	15.81	18.86
	CA_5A-30A	5	10	QPSK	1	0	20450	829	30	10	QPSK	1	49	27710	2310	19.5	19.19	0-8.5	16.01	15.93	18.98
					1	49						1	0			19.5	19.08	0	16.03	15.91	19.0
		5	10	QPSK	1	0	20525	836.5	30	10	QPSK	1	49	27710	2310	19.5	19.07	0-8.5	15.94	15.79	18.88
					1	49						1	0			19.5	19.02	0	15.89	15.77	18.84
		5	10	QPSK	1	0	20600	844	30	10	QPSK	1	49	27710	2310	19.5	19	0-8.5	15.92	15.84	18.89
					1	49						1	0			19.5	18.98	0	15.98	15.81	18.91
	CA_5A-48A	5	10	QPSK	1	0	20450	829	48	20	QPSK	1	99	56210	3647	19.5	19.19	0-8.5	15.96	15.91	18.95
					1	49						1	0			19.5	19.08	0	15.99	15.84	18.93
		5	10	QPSK	1	0	20525	836.5	48	20	QPSK	1	99	56210	3647	19.5	19.07	0-8.5	16.03	15.93	18.99
					1	49						1	0			19.5	19.02	0	16.01	15.86	18.95
		5	10	QPSK	1	0	20600	844	48	20	QPSK	1	99	56210	3647	19.5	19	0-8.5	15.94	15.81	18.89
					1	49						1	0			19.5	18.98	0	15.86	15.77	18.83
	CA_5A-66A	5	10	QPSK	1	0	20450	829	66	20	QPSK	1	99	132322	1745	19.5	19.19	0-8.5	16.05	15.96	19.02
					1	49						1	0			19.5	19.08	0	16.01	15.91	18.97
		5	10	QPSK	1	0	20525	836.5	66	20	QPSK	1	99	132322	1745	19.5	19.07	0-8.5	16.03	15.94	19.00
					1	49						1	0			19.5	19.02	0	15.96	15.84	18.91
		5	10	QPSK	1	0	20600	844	66	20	QPSK	1	99	132322	1745	19.5	19	0-8.5	15.95	15.86	18.92
					1	49						1	0			19.5	18.98	0	15.92	15.88	18.91
	CA_12A-30A	12	10	QPSK	1	0	23060	704	30	10	QPSK	1	49	27710	2310	20.5	20.41	0-8.5	17.35	17.24	20.31
					1	49						1	0			20.5	20.3	0	17.25	17.14	20.21
		12	10	QPSK	1	0	23095	707.5	30	10	QPSK	1	49	27710	2310	20.5	20.44	0-8.5	17.13	17.08	20.12
					1	49						1	0			20.5	20.4	0	17.11	17.03	20.08
		12	10	QPSK	1	0	23130	711	30	10	QPSK	1	49	27710	2310	20.5	20.43	0-8.5	17.32	17.21	20.28
					1	49						1	0			20.5	20.29	0	17.25	17.14	20.21
	CA_12A-66A	12	10	QPSK	1	0	23060	704	66	20	QPSK	1	99	132322	1745	20.5	20.41	0-8.5	17.35	17.21	20.29
					1	49						1	0			20.5	20.3	0	17.26	17.19	20.24
		12	10	QPSK	1	0	23095	707.5	66	20	QPSK	1	99	132322	1745	20.5	20.44	0-8.5	17.31	17.22	20.28
					1	49						1	0			20.5	20.4	0	17.24	17.16	20.21
		12	10	QPSK	1	0	23130	711	66	20	QPSK	1	99	132322	1745	20.5	20.43	0-8.5	17.36	17.21	20.30
					1	49						1	0			20.5	20.29	0	17.24	17.22	20.24
	CA_13A-48A	13	10	QPSK	1	0	23230	782	48	20	QPSK	1	99	56210	3647	20	19.95	0-8.5	16.93	16.85	19.90
					1	49						1	0			20	19.8	0	16.75	16.71	19.74
		13	10	QPSK	1	0	23230	782	48	20	QPSK	1	99	56210	3647	20	19.95	0-8.5	16.85	16.73	19.80
					1	49						1	0			20	19.8	0	16.71	16.64	19.69
		13	10	QPSK	1	0	23230	782	48	20	QPSK	1	99	56210	3647	20	19.95	0-8.5	16.86	16.81	19.85
					1	49						1	0			20	19.8	0	16.73	16.62	19.69
	CA_13A-66A	13	10	QPSK	1	0	23230	782	66	20	QPSK	1	99	132322	1745	20	19.95	0-8.5	16.93	16.85	19.90
					1	49						1	0			20	19.8	0	16.72	16.66	19.70
		13	10	QPSK	1	0	23230	782	66	20	QPSK	1	99	132322	1745	20	19.95	0-8.5	16.91	16.85	19.89
					1	49						1	0			20	19.8	0	16.71	16.65	19.69
		13	10	QPSK	1	0	23230	782	66	20	QPSK	1	99	132322	1745	20	19.95	0-8.5	16.93	16.84	19.90
					1	49						1	0			20	19.8	0	16.72	16.63	19.69

Uplink Carrier Aggregation Scenarios Conducted Power (Reduction) - Laptop

Confugure	Combination	PCC							SCC							Measurement Power					
		Band	BW (MHz)	Modulation	RB Size	RB Offset	UL Channel	UL Frequency (MHz)	Band	BW (MHz)	Modulation	RB Size	RB Offset	UL Channel	UL Frequency (MHz)	Maximum Tune-up Power	Single Carrier Tx Power without UL-CA Active (dBm)	MPR Level (dB)	Tx Power with UL-CA Active (dBm)		
																			PCC	SCC	Total
Inter Band	CA_14A-30A	14	10	QPSK	1	0	23330	793	30	10	QPSK	1	49	27710	2310	20	19.92	0-8.5	16.88	16.72	19.81
					1	49						20	19.81			0	16.79	16.71	19.76		
		14	10	QPSK	1	0	23330	793	30	10	QPSK	1	49	27710	2310	20	19.92	0-8.5	16.72	16.65	19.70
					1	49						20	19.81			0	16.71	16.64	19.69		
		14	10	QPSK	1	0	23330	793	30	10	QPSK	1	49	27710	2310	20	19.92	0-8.5	16.85	16.81	19.84
					1	49						20	19.81			0	16.79	16.72	19.77		
	CA_14A-66A	14	10	QPSK	1	0	23330	793	66	20	QPSK	1	99	132322	1745	20	19.92	0-8.5	16.88	16.84	19.87
					1	49						20	19.81			0	16.74	16.71	19.74		
		14	10	QPSK	1	0	23330	793	66	20	QPSK	1	99	132322	1745	20	19.92	0-8.5	16.86	16.79	19.84
					1	49						20	19.81			0	16.74	16.68	19.72		
		14	10	QPSK	1	0	23330	793	66	20	QPSK	1	99	132322	1745	20	19.92	0-8.5	16.85	16.73	19.80
					1	49						20	19.81			0	16.73	16.65	19.70		
	CA_48A-66A	48	20	QPSK	1	0	55340	3560	66	20	QPSK	1	99	132322	1745	18.0	17.76	0-8.5	14.71	14.69	17.71
					1	99						18.0	17.73			0	14.69	14.61	17.66		
		48	20	QPSK	1	0	55780	3603	66	20	QPSK	1	99	132322	1745	18.0	17.71	0-8.5	14.65	14.55	17.61
					1	99						18.0	17.69			0	14.66	14.58	17.63		
		48	20	QPSK	1	0	56210	3647	66	20	QPSK	1	99	132322	1745	18.0	17.75	0-8.5	14.72	14.63	17.69
					1	99						18.0	17.76			0	14.71	14.61	17.67		
	48	20	QPSK	1	0	56640	3690	66	20	QPSK	1	99	132322	1745	18.0	17.78	0-8.5	14.75	14.64	17.71	
				1	99						18.0	17.72			0	14.68	14.61	17.66			

Uplink Carrier Aggregation Scenarios Conducted Power (Reduction) - Tablet

Configure	Combination	PCC							SCC							Measurement Power					
		Band	BW (MHz)	Modulation	RB Size	RB Offset	UL Channel	UL Frequency (MHz)	Band	BW (MHz)	Modulation	RB Size	RB Offset	UL Channel	UL Frequency (MHz)	Maximum Tune-up Power	Single Carrier Tx Power without UL-CA Active (dBm)	MPR Level (dB)	Tx Power with UL-CA Active (dBm)		
																			PCC	SCC	Total
Intra Band Contiguous	CA_5B	5	10	QPSK	1	0	20450	829	5	10	QPSK	1	49	20549	838.9	18.5	18.48	0-8.5	15.42	15.37	18.41
					1	49						18.5	18.4			0	15.35	15.33	18.35		
		5	10	QPSK	1	0	20476	831.6	5	10	QPSK	1	49	20575	841.5	18.5	18.42	0-8.5	15.37	15.32	18.36
					1	49						18.5	18.35			0	15.31	15.25	18.29		
		5	10	QPSK	1	0	20501	834.1	5	10	QPSK	1	49	20600	844	18.5	18.36	0-8.5	15.33	15.27	18.31
					1	49						18.5	18.33			0	15.28	15.25	18.28		
	CA_7C	7	20	QPSK	1	0	20850	2510	7	20	QPSK	1	99	21048	2529.8	11.5	11.4	0-8.5	8.38	8.32	11.36
					1	99						11.5	11.37			0	8.35	8.31	11.34		
		7	20	QPSK	1	0	21001	2525.1	7	20	QPSK	1	99	21199	2544.9	11.5	11.45	0-8.5	8.41	8.37	11.40
					1	99						11.5	11.42			0	8.38	8.36	11.38		
		7	20	QPSK	1	0	21152	2540.2	7	20	QPSK	1	99	21350	2560	11.5	11.44	0-8.5	8.41	8.37	11.40
					1	99						11.5	11.38			0	8.33	8.31	11.33		
	CA_38C	38	20	QPSK	1	0	37850	2580	38	20	QPSK	1	99	38048	2602.5	14.0	13.89	0-8.5	10.85	10.81	13.84
					1	99						14.0	13.88			0	10.81	10.78	13.81		
		38	20	QPSK	1	0	37901	2585.1	38	20	QPSK	1	99	38099	2604.9	14.0	13.92	0-8.5	10.9	10.89	13.91
					1	99						14.0	13.85			0	10.84	10.82	13.84		
		38	20	QPSK	1	0	37952	2590.2	38	20	QPSK	1	99	38150	2610	14.0	13.93	0-8.5	10.86	10.84	13.86
					1	99						14.0	13.89			0	10.81	10.76	13.80		
	CA_41C	41	20	QPSK	1	0	39750	2506	41	20	QPSK	1	99	39948	2525.8	11.0	10.79	0-8.5	7.72	7.69	10.72
					1	99						11.0	10.79			0	7.73	7.65	10.70		
		41	20	QPSK	1	0	40185	2549.5	41	20	QPSK	1	99	40383	2569.3	11.0	10.87	0-8.5	7.81	7.74	10.79
					1	99						11.0	10.84			0	7.82	7.79	10.82		
		41	20	QPSK	1	0	40620	2593	41	20	QPSK	1	99	40818	2612.8	11.0	10.94	0-8.5	7.92	7.88	10.91
					1	99						11.0	10.75			0	7.71	7.65	10.69		
	41	20	QPSK	1	0	41055	2636.5	41	20	QPSK	1	99	41253	2656.3	11.0	10.87	0-8.5	7.83	7.74	10.80	
				1	99						11.0	10.72			0	7.71	7.65	10.69			
	41	20	QPSK	1	0	41292	2660.2	41	20	QPSK	1	99	41490	2680	11.0	10.81	0-8.5	7.75	7.71	10.74	
				1	99						11.0	10.79			0	7.77	7.72	10.76			
	CA_48C	48	20	QPSK	1	0	55340	3560	48	20	QPSK	1	99	55538	3579.8	12.0	11.88	0-8.5	8.85	8.81	11.84
					1	99						12.0	11.68			0	8.61	8.58	11.61		
		48	20	QPSK	1	0	55830	3609	48	20	QPSK	1	99	55632	3589.2	12.0	11.73	0-8.5	8.72	8.64	11.69
					1	99						12.0	11.71			0	8.65	8.61	11.64		
		48	20	QPSK	1	0	56150	3641	48	20	QPSK	1	99	55952	3621.2	12.0	11.73	0-8.5	8.66	8.64	11.66
					1	99						12.0	11.68			0	8.61	8.58	11.61		
	48	20	QPSK	1	0	56640	3550	48	20	QPSK	1	99	56442	3670.2	12.0	11.69	0-8.5	8.62	8.55	11.60	
				1	99						12.0	11.71			0	8.64	8.57	11.62			
	CA_66B	66	10	QPSK	1	0	132022	1715	66	10	QPSK	1	49	132121	1724.9	15	14.89	0-8.5	11.85	11.81	14.84
					1	49						15	14.85			0	11.81	11.79	14.81		
		66	10	QPSK	1	0	132373	1750.1	66	10	QPSK	1	49	132472	1760	15	14.96	0-8.5	11.94	11.82	14.89
					1	49						15	14.91			0	11.9	11.85	14.89		
		66	10	QPSK	1	0	132523	1765.1	66	10	QPSK	1	49	132622	1775	15	14.91	0-8.5	11.89	11.85	14.88
					1	49						15	14.89			0	11.87	11.81	14.85		
	CA_66C	66	20	QPSK	1	0	132072	1720	66	20	QPSK	1	99	132270	1739.8	15	14.92	0-8.5	11.89	11.85	14.88
					1	99						15	14.88			0	11.85	11.81	14.84		
		66	20	QPSK	1	0	132323	1745.1	66	20	QPSK	1	99	132521	1764.9	15	14.98	0-8.5	11.87	11.82	14.86
					1	99						15	14.9			0	11.85	11.79	14.83		
		66	20	QPSK	1	0	132374	1750.2	66	20	QPSK	1	99	132572	1770	15	14.91	0-8.5	11.83	11.77	14.81
					1	99						15	14.89			0	11.86	11.83	14.86		

Uplink Carrier Aggregation Scenarios Conducted Power (Reduction) - Tablet

Configure	Combination	PCC							SCC							Measurement Power					
		Band	BW (MHz)	Modulation	RB Size	RB Offset	UL Channel	UL Frequency (MHz)	Band	BW (MHz)	Modulation	RB Size	RB Offset	UL Channel	UL Frequency (MHz)	Maximum Tune-up Power	Single Carrier Tx Power without UL-CA Active (dBm)	MPR Level (dB)	Tx Power with UL-CA Active (dBm)		
																			PCC	SCC	Total
Inter Band	CA_2A-5A	2	20	QPSK	1	0	18700	1860	5	10	QPSK	1	49	20525	836.5	14	13.97	0-8.5	10.95	10.91	13.94
					1	99						1	0			14	13.96	0	10.91	10.85	13.89
		2	20	QPSK	1	0	18900	1880	5	10	QPSK	1	49	20525	836.5	14	13.95	0-8.5	10.89	10.83	13.87
					1	99						1	0			14	13.9	0	10.85	10.79	13.83
		2	20	QPSK	1	0	19100	1900	5	10	QPSK	1	49	20525	836.5	14	13.93	0-8.5	10.87	10.85	13.87
					1	99						1	0			14	13.92	0	10.84	10.81	13.84
	CA_2A-12A	2	20	QPSK	1	0	18700	1860	12	10	QPSK	1	49	23095	707.5	14	13.97	0-8.5	10.95	10.91	13.94
					1	99						1	0			14	13.96	0	10.93	10.89	13.92
		2	20	QPSK	1	0	18900	1880	12	10	QPSK	1	49	23095	707.5	14	13.95	0-8.5	10.91	10.88	13.91
					1	99						1	0			14	13.9	0	10.85	10.81	13.84
		2	20	QPSK	1	0	19100	1900	12	10	QPSK	1	49	23095	707.5	14	13.93	0-8.5	10.89	10.85	13.88
					1	99						1	0			14	13.92	0	10.85	10.81	13.84
	CA_2A-13A	2	20	QPSK	1	0	18700	1860	13	10	QPSK	1	49	23230	782	14	13.97	0-8.5	10.96	10.91	13.95
					1	99						1	0			14	13.96	0	10.94	10.92	13.94
		2	20	QPSK	1	0	18900	1880	13	10	QPSK	1	49	23230	782	14	13.95	0-8.5	10.91	10.84	13.89
					1	99						1	0			14	13.9	0	10.87	10.82	13.86
		2	20	QPSK	1	0	19100	1900	13	10	QPSK	1	49	23230	782	14	13.93	0-8.5	10.89	10.85	13.88
					1	99						1	0			14	13.92	0	10.85	10.82	13.85
	CA_2A-14A	2	20	QPSK	1	0	18700	1860	14	10	QPSK	1	49	23330	793	14	13.97	0-8.5	10.91	10.89	13.91
					1	99						1	0			14	13.96	0	10.92	10.87	13.91
		2	20	QPSK	1	0	18900	1880	14	10	QPSK	1	49	23330	793	14	13.95	0-8.5	10.89	10.85	13.88
					1	99						1	0			14	13.9	0	10.88	10.84	13.87
		2	20	QPSK	1	0	19100	1900	14	10	QPSK	1	49	23330	793	14	13.93	0-8.5	10.89	10.82	13.87
					1	99						1	0			14	13.92	0	10.85	10.81	13.84
	CA_2A-48A	2	20	QPSK	1	0	18700	1860	48	20	QPSK	1	99	56210	3647	14	13.97	0-8.5	10.94	10.91	13.94
					1	99						1	0			14	13.96	0	10.91	10.88	13.91
		2	20	QPSK	1	0	18900	1880	48	20	QPSK	1	99	56210	3647	14	13.95	0-8.5	10.92	10.89	13.92
					1	99						1	0			14	13.9	0	10.85	10.81	13.84
		2	20	QPSK	1	0	19100	1900	48	20	QPSK	1	99	56210	3647	14	13.93	0-8.5	10.89	10.83	13.87
					1	99						1	0			14	13.92	0	10.85	10.79	13.83
	CA_4A-5A	4	20	QPSK	1	0	20050	1720	5	10	QPSK	1	49	20525	836.5	14.5	14.46	0-8.5	11.42	11.38	14.41
					1	99						1	0			14.5	14.44	0	11.38	11.36	14.38
		4	20	QPSK	1	0	20175	1732.5	5	10	QPSK	1	49	20525	836.5	14.5	14.43	0-8.5	11.35	11.33	14.35
					1	99						1	0			14.5	14.4	0	11.32	11.28	14.31
		4	20	QPSK	1	0	20300	1745	5	10	QPSK	1	49	20525	836.5	14.5	14.42	0-8.5	11.37	11.31	14.35
					1	99						1	0			14.5	14.37	0	11.33	11.29	14.32
	CA_4A-12A	4	20	QPSK	1	0	20050	1720	12	10	QPSK	1	49	23095	707.5	14.5	14.46	0-8.5	11.42	11.37	14.41
					1	99						1	0			14.5	14.44	0	11.39	11.35	14.38
		4	20	QPSK	1	0	20175	1732.5	12	10	QPSK	1	49	23095	707.5	14.5	14.43	0-8.5	11.37	11.33	14.36
					1	99						1	0			14.5	14.4	0	11.41	11.32	14.38
		4	20	QPSK	1	0	20300	1745	12	10	QPSK	1	49	23095	707.5	14.5	14.42	0-8.5	11.38	11.34	14.37
					1	99						1	0			14.5	14.37	0	11.32	11.27	14.31
	CA_4A-13A	4	20	QPSK	1	0	20050	1720	13	10	QPSK	1	49	23230	782	14.5	14.46	0-8.5	11.41	11.35	14.39
					1	99						1	0			14.5	14.44	0	11.38	11.31	14.36
		4	20	QPSK	1	0	20175	1732.5	13	10	QPSK	1	49	23230	782	14.5	14.43	0-8.5	11.37	11.35	14.37
					1	99						1	0			14.5	14.4	0	11.35	11.31	14.34
		4	20	QPSK	1	0	20300	1745	13	10	QPSK	1	49	23230	782	14.5	14.42	0-8.5	11.37	11.29	14.34
					1	99						1	0			14.5	14.37	0	11.32	11.28	14.31

Uplink Carrier Aggregation Scenarios Conducted Power (Reduction) - Tablet

Configure	Combination	PCC							SCC							Measurement Power					
		Band	BW (MHz)	Modulation	RB Size	RB Offset	UL Channel	UL Frequency (MHz)	Band	BW (MHz)	Modulation	RB Size	RB Offset	UL Channel	UL Frequency (MHz)	Maximum Tune-up Power	Single Carrier Tx Power without UL-CA Active (dBm)	MPR Level (dB)	Tx Power with UL-CA Active (dBm)		
																			PCC	SCC	Total
Inter Band	CA_5A-7A	5	10	QPSK	1	0	20450	829	7	20	QPSK	1	99	21100	2535	18.5	18.48	0-8.5	15.42	15.38	18.41
					1	49						1	0			18.5	18.4	0	15.41	15.36	18.40
		5	10	QPSK	1	0	20525	836.5	7	20	QPSK	1	99	21100	2535	18.5	18.43	0-8.5	15.38	15.34	18.37
					1	49						1	0			18.5	18.38	0	15.32	15.28	18.31
		5	10	QPSK	1	0	20600	844	7	20	QPSK	1	99	21100	2535	18.5	18.39	0-8.5	15.31	15.29	18.31
					1	49						1	0			18.5	18.37	0	15.25	15.21	18.24
	CA_5A-30A	5	10	QPSK	1	0	20450	829	30	10	QPSK	1	49	27710	2310	18.5	18.48	0-8.5	15.41	15.38	18.41
					1	49						1	0			18.5	18.4	0	15.38	15.31	18.36
		5	10	QPSK	1	0	20525	836.5	30	10	QPSK	1	49	27710	2310	18.5	18.43	0-8.5	15.37	13.29	17.46
					1	49						1	0			18.5	18.38	0	15.38	15.32	18.36
		5	10	QPSK	1	0	20600	844	30	10	QPSK	1	49	27710	2310	18.5	18.39	0-8.5	15.35	15.28	18.33
					1	49						1	0			18.5	18.37	0	15.32	15.27	18.31
	CA_5A-48A	5	10	QPSK	1	0	20450	829	48	20	QPSK	1	99	56210	3647	18.5	18.48	0-8.5	15.43	15.38	18.42
					1	49						1	0			18.5	18.4	0	15.38	15.36	18.38
		5	10	QPSK	1	0	20525	836.5	48	20	QPSK	1	99	56210	3647	18.5	18.43	0-8.5	15.41	15.37	18.40
					1	49						1	0			18.5	18.38	0	15.34	15.28	18.32
		5	10	QPSK	1	0	20600	844	48	20	QPSK	1	99	56210	3647	18.5	18.39	0-8.5	15.36	15.29	18.34
					1	49						1	0			18.5	18.37	0	15.31	15.24	18.29
	CA_5A-66A	5	10	QPSK	1	0	20450	829	66	20	QPSK	1	99	132322	1745	18.5	18.48	0-8.5	15.43	15.38	18.42
					1	49						1	0			18.5	18.4	0	15.35	15.31	18.34
		5	10	QPSK	1	0	20525	836.5	66	20	QPSK	1	99	132322	1745	18.5	18.43	0-8.5	15.41	15.35	18.39
					1	49						1	0			18.5	18.38	0	15.33	15.28	18.32
		5	10	QPSK	1	0	20600	844	66	20	QPSK	1	99	132322	1745	18.5	18.39	0-8.5	15.32	15.28	18.31
					1	49						1	0			18.5	18.37	0	15.27	15.22	18.26
	CA_12A-30A	12	10	QPSK	1	0	23060	704	30	10	QPSK	1	49	27710	2310	16.5	16.41	0-8.5	13.38	13.31	16.36
					1	49						1	0			16.5	16.39	0	13.32	13.29	16.32
		12	10	QPSK	1	0	23095	707.5	30	10	QPSK	1	49	27710	2310	16.5	16.48	0-8.5	13.37	13.32	16.36
					1	49						1	0			16.5	16.43	0	13.35	13.31	16.34
		12	10	QPSK	1	0	23130	711	30	10	QPSK	1	49	27710	2310	16.5	16.44	0-8.5	13.34	13.27	16.32
					1	49						1	0			16.5	16.38	0	13.32	13.24	16.29
	CA_12A-66A	12	10	QPSK	1	0	23060	704	66	20	QPSK	1	99	132322	1745	16.5	16.41	0-8.5	13.38	13.25	16.33
					1	49						1	0			16.5	16.39	0	13.36	13.21	16.30
		12	10	QPSK	1	0	23095	707.5	66	20	QPSK	1	99	132322	1745	16.5	16.48	0-8.5	13.42	13.38	16.41
					1	49						1	0			16.5	16.43	0	13.41	13.35	16.39
		12	10	QPSK	1	0	23130	711	66	20	QPSK	1	99	132322	1745	16.5	16.44	0-8.5	13.37	13.33	16.36
					1	49						1	0			16.5	16.38	0	13.36	13.31	16.35
	CA_13A-48A	13	10	QPSK	1	0	23230	782	48	20	QPSK	1	99	56210	3647	17	16.97	0-8.5	13.95	13.85	16.91
					1	49						1	0			17	16.92	0	13.91	13.86	16.90
		13	10	QPSK	1	0	23230	782	48	20	QPSK	1	99	56210	3647	17	16.97	0-8.5	13.92	13.89	16.92
					1	49						1	0			17	16.92	0	13.88	13.84	16.87
		13	10	QPSK	1	0	23230	782	48	20	QPSK	1	99	56210	3647	17	16.97	0-8.5	13.91	13.86	16.90
					1	49						1	0			17	16.92	0	13.85	13.81	16.84
	CA_13A-66A	13	10	QPSK	1	0	23230	782	66	20	QPSK	1	99	132322	1745	17	16.97	0-8.5	13.96	13.9	16.94
					1	49						1	0			17	16.92	0	13.89	13.85	16.88
		13	10	QPSK	1	0	23230	782	66	20	QPSK	1	99	132322	1745	17	16.97	0-8.5	13.91	13.84	16.89
					1	49						1	0			17	16.92	0	13.88	13.81	16.86
		13	10	QPSK	1	0	23230	782	66	20	QPSK	1	99	132322	1745	17	16.97	0-8.5	13.94	13.89	16.93
					1	49						1	0			17	16.92	0	13.84	13.77	16.82

Uplink Carrier Aggregation Scenarios Conducted Power (Reduction) - Tablet

Confugure	Combination	PCC							SCC							Measurement Power					
		Band	BW (MHz)	Modulation	RB Size	RB Offset	UL Channel	UL Frequency (MHz)	Band	BW (MHz)	Modulation	RB Size	RB Offset	UL Channel	UL Frequency (MHz)	Maximum Tune-up Power	Single Carrier Tx Power without UL-CA Active (dBm)	MPR Level (dB)	Tx Power with UL-CA Active (dBm)		
																			PCC	SCC	Total
Inter Band	CA_14A-30A	14	10	QPSK	1	0	23330	793	30	10	QPSK	1	49	27710	2310	17.5	17.44	0-8.5	14.41	14.38	17.41
					1	49						17.5	17.39			0	14.35	14.31	17.34		
		14	10	QPSK	1	0	23330	793	30	10	QPSK	1	49	27710	2310	17.5	17.44	0-8.5	14.32	14.28	17.31
					1	49						17.5	17.39			0	14.36	14.27	17.33		
		14	10	QPSK	1	0	23330	793	30	10	QPSK	1	49	27710	2310	17.5	17.44	0-8.5	14.37	14.33	17.36
					1	49						17.5	17.39			0	14.32	14.29	17.32		
	CA_14A-66A	14	10	QPSK	1	0	23330	793	66	20	QPSK	1	99	132322	1745	17.5	17.44	0-8.5	14.41	14.36	17.40
					1	49						17.5	17.39			0	14.36	14.32	17.35		
		14	10	QPSK	1	0	23330	793	66	20	QPSK	1	99	132322	1745	17.5	17.44	0-8.5	14.31	14.28	17.31
					1	49						17.5	17.39			0	14.32	14.27	17.31		
		14	10	QPSK	1	0	23330	793	66	20	QPSK	1	99	132322	1745	17.5	17.44	0-8.5	14.37	14.32	17.36
					1	49						17.5	17.39			0	14.35	14.31	17.34		
	CA_48A-66A	48	20	QPSK	1	0	55340	3560	66	20	QPSK	1	99	132322	1745	12.0	11.88	0-8.5	8.85	8.81	11.84
					1	99						12.0	11.68			0	8.62	8.58	11.61		
		48	20	QPSK	1	0	55780	3603	66	20	QPSK	1	99	132322	1745	12.0	11.76	0-8.5	8.71	8.64	11.69
					1	99						12.0	11.73			0	8.69	8.65	11.68		
		48	20	QPSK	1	0	56210	3647	66	20	QPSK	1	99	132322	1745	12.0	11.74	0-8.5	8.72	8.69	11.72
					1	99						12.0	11.72			0	8.7	8.62	11.67		
	48	20	QPSK	1	0	56640	3690	66	20	QPSK	1	99	132322	1745	12.0	11.69	0-8.5	8.66	8.58	11.63	
				1	99						12.0	11.71			0	8.61	8.54	11.59			

Downlink Carrier Aggregation Scenarios Conducted Power (Reduction) - Tablet

Configure	Combination	PCC								SCC1				SCC2				SCC3				SCC4				Measurement Power			
		LTE Band	BW [Mhz]	UL Channel	UL Freq. [MHz]	UL RB	UL Offset	DL Channel	DL Freq. [MHz]	LTE Band	BW [Mhz]	DL Channel	DL Freq. [MHz]	LTE Band	BW [Mhz]	DL Channel	DL Freq. [MHz]	LTE Band	BW [Mhz]	DL Channel	DL Freq. [MHz]	LTE Band	BW [Mhz]	DL Channel	DL Freq. [MHz]	Maximum Tune-up Power	Single Carrier Tx Power without DL-CA Active (dBm)	Tx Power with DL-CA Active (dBm)	
																											PCC	Total	
Inter Band	CA_48A-48C-66B	48	20	56210	3647	1	0	56210	3647	48	20	56442	3670.2	48	20	56640	3690	66	10	67086	2175	66	10	66987	2165.1	12.0	11.74	11.73	11.73
	CA_48A-48C-66C	48	20	56210	3647	1	0	56210	3647	48	20	56442	3670.2	48	20	56640	3690	66	20	67036	2170	66	20	66838	2150.2	12.0	11.74	11.65	11.65
	CA_48A-48D-66A	48	20	56210	3647	1	0	56210	3647	48	20	56244	3650.4	48	20	56442	3670.2	48	20	56640	3690	66	20	67036	2170	12.0	11.74	11.61	11.61
	CA_48C-48C-66A	48	20	56210	3647	1	0	56210	3647	48	20	56408	3666.8	48	20	55340	3560	48	20	55538	3579.8	66	20	67036	2170	12.0	11.74	11.69	11.69
	CA_48C-66A-66A-66A	48	20	56210	3647	1	0	56210	3647	48	20	56408	3666.8	66	20	67036	2170	66	20	66786	2145	66	20	66536	2120	12.0	11.74	11.64	11.64
	CA_48E-66A	48	20	55340	3560	1	0	55340	3560	48	20	55538	3579.8	48	20	55736	3599.6	48	20	55934	3619.4	66	20	67036	2170	12.0	11.88	11.82	11.82
	CA_2A-4A-7A	2	20	18900	1890	1	0	900	1960	4	20	2175	2132.5	7	20	3100	2655									14.0	13.95	13.91	13.91
	CA_2A-4A-13A	2	20	18900	1890	1	0	900	1960	4	20	2175	2132.5	13	10	5230	751									14.0	13.95	13.85	13.85
	CA_2A-5A-46A	2	20	18900	1890	1	0	900	1960	5	10	2450	874	46	20	50665	5537.5									14.0	13.95	13.88	13.88
	CA_2A-13A-46A	2	20	18900	1890	1	0	900	1960	13	10	5230	751	46	20	50665	5537.5									14.0	13.95	13.89	13.89
	CA_2A-29A-30A	2	20	18900	1890	1	0	900	1960	29	10	9715	722.5	30	10	9820	2355									14.0	13.95	13.91	13.91
	CA_2A-46A-48A	2	20	18900	1890	1	0	900	1960	46	20	50665	5537.5	48	20	56210	3647									14.0	13.95	13.93	13.93
	CA_4A-7A-28A	4	20	20175	1732.5	1	0	2175	2132.5	7	20	3100	2655	28	20	9435	780.5									14.5	14.43	14.41	14.41
	CA_4A-29A-30A	4	20	20175	1732.5	1	0	2175	2132.5	29	10	9715	722.5	30	10	9820	2355									14.5	14.43	14.42	14.42
	CA_5A-46A-66A	5	10	20525	836.5	1	0	2525	881.5	46	20	50665	5537.5	66	20	67036	2170									18.5	18.43	18.35	18.35
	CA_13A-48A-66A	13	10	23230	782	1	0	5230	751	46	20	50665	5537.5	66	20	67036	2170									17.0	16.97	16.91	16.91
	CA_2A-2A-4A-5A	2	20	18900	1890	1	0	900	1960	2	20	700	1940	4	20	2175	2132.5	5	10	2450	874					14.0	13.95	13.89	13.89
	CA_2A-2A-4A-12A	2	20	18900	1890	1	0	900	1960	2	20	700	1940	4	20	2175	2132.5	12	10	5094	737.4					14.0	13.95	13.81	13.81
	CA_2A-2A-46C	2	20	18900	1890	1	0	900	1960	2	20	700	1940	46	20	54142	5885.2	46	20	54340	5905					14.0	13.95	13.86	13.86
	CA_2A-4A-4A-5A	2	20	18900	1890	1	0	900	1960	4	20	2050	2120	4	20	2300	2145	5	10	2450	874					14.0	13.95	13.93	13.93
	CA_2A-4A-4A-12A	2	20	18900	1890	1	0	900	1960	4	20	2050	2120	4	20	2300	2145	12	10	5094	737.4					14.0	13.95	13.91	13.91
	CA_2A-4A-5B	2	20	18900	1890	1	0	900	1960	4	20	2175	2132.5	5	10	2450	874	5	10	2549	883.9					14.0	13.95	13.94	13.94
	CA_2A-5A-46C	2	20	18900	1890	1	0	900	1960	5	10	2549	883.9	46	20	54142	5885.2	46	20	54340	5905					14.0	13.95	13.92	13.92
	CA_2A-12A-66C	2	20	18900	1890	1	0	900	1960	12	10	5094	737.4	66	20	67036	2170	66	20	66838	2150.2					14.0	13.95	13.89	13.89
	CA_2A-13A-48C	2	20	18900	1890	1	0	900	1960	13	10	5230	751	46	20	54142	5885.2	46	20	54340	5905					14.0	13.95	13.85	13.85
	CA_2A-13A-66C	2	20	18900	1890	1	0	900	1960	13	10	5230	751	66	20	67036	2170	66	20	66838	2150.2					14.0	13.95	13.84	13.84
	CA_2A-46A-48C	2	20	18900	1890	1	0	900	1960	46	20	46890	5160	48	20	56442	3670.2	48	20	56640	3690					14.0	13.95	13.93	13.93
	CA_2A-46C-48A	2	20	18900	1890	1	0	900	1960	46	20	50665	5537.5	48	20	50863	5557.3	48	20	56210	3647					14.0	13.95	13.91	13.91
	CA_4A-4A-12A-30A	4	20	20300	1745	1	0	2300	2145	4	20	2050	2120	12	10	5094	737.4	30	10	9820	2355					14.5	14.42	14.35	14.35
	CA_5A-46C-66A	5	10	20525	836.5	1	0	2525	881.5	46	20	50665	5537.5	46	20	50863	5557.3	66	20	67036	2170					18.5	18.43	18.38	18.38
	CA_13A-46C-66A	13	10	23230	782	1	0	5230	751	46	20	50665	5537.5	46	20	50863	5557.3	66	20	67036	2170					17.0	16.97	16.91	16.91
	CA_13A-48A-66B	13	10	23230	782	1	0	5230	751	48	20	56210	3647	66	10	67086	2175	66	10	66987	2165.1					17.0	16.97	16.92	16.92
	CA_13A-48A-66C	13	10	23230	782	1	0	5230	751	48	20	56210	3647	66	20	67036	2170	66	20	66838	2150.2					17.0	16.97	16.89	16.89
	CA_2A-2A-5A-66A-66A	2	20	18900	1890	1	0	900	1960	2	20	700	1940	5	10	2450	874	66	20	67036	2170	66	20	66786	2145	14.0	13.95	13.91	13.91
	CA_2A-2A-5A-66B	2	20	18900	1890	1	0	900	1960	2	20	700	1940	5	10	2450	874	66	10	67086	2175	66	10	66987	2165.1	14.0	13.95	13.85	13.85
	CA_2A-2A-5A-66C	2	20	18900	1890	1	0	900	1960	2	20	700	1940	5	10	2450	874	66	20	67036	2170	66	20	66838	2150.2	14.0	13.95	13.81	13.81
	CA_2A-2A-12A-66A-66A	2	20	18900	1890	1	0	900	1960	2	20	700	1940	12	10	5094	737.4	66	20	67036	2170	66	20	66786	2145	14.0	13.95	13.89	13.89
	CA_2A-2A-13A-66A-66A	2	20	18900	1890	1	0	900	1960	2	20	700	1940	13	10	5230	751	66	20	67036	2170	66	20	66786	2145	14.0	13.95	13.92	13.92
	CA_2A-2A-13A-66B	2	20	18900	1890	1	0	900	1960	2	20	700	1940	13	10	5230	751	66	10	67086	2175	66	10	66987	2165.1	14.0	13.95	13.87	13.87
	CA_2A-2A-14A-66A-66A	2	20	18900	1890	1	0	900	1960	2	20	700	1940	14	10	5330	763	66	20	67036	2170	66	20	66786	2145	14.0	13.95	13.92	13.92
	CA_2A-5A-46D	2	20	18900	1890	1	0	900	1960	5	10	2450	874	46	20	53942	5885.2	46	20	54140	5885	46	20	54338	5904.8	14.0	13.95	13.94	13.94
	CA_2A-5A-48A-48C	2	20	18900	1890	1	0	900	1960	5	10	2450	874	48	20	56210	3647	48	20	56442	3670.2	48	20	56640	3690	14.0	13.95	13.89	13.89
	CA_2A-5A-48D	2	20	18900	1890	1	0	900	1960	5	10	2450	874	48	20	56244	3650.4	48	20	56442	3670.2	48	20	56640	3690	14.0	13.95	13.93	13.93
	CA_2A-5B-66A-66A	2	20	18900	1890	1	0	900	1960	5	10	2450	874	5	10	2549	883.9	66	20	67036	2170	66	20	66786	2145	14.0	13.95	13.91	13.91
	CA_2A-5B-66B	2	20	18900	1890	1	0	900	1960	5	10	2450	874	5	10	2549	883.9	66	10	67086	2175	66	10	66987	2165.1	14.0	13.95	13.85	13.85
	CA_2A-5B-66C	2	20	18900	1890	1	0	900	1960	5	10	2450	874	5	10	2549	883.9	66	20	67036	2170	66	20	66838	2150.2	14.0	13.95	13.94	13.94
	CA_2A-13A-48A-48C	2	20	18900	1890	1	0	900	1960	13	10	5230	751	48	20	56210	3647	48	20	56442	3670.2	48	20	56640	3690	14.0	13.95	13.89	13.89
	CA_2A-14A-66A-66A-66A	2	20	18900	1890	1	0	900	1960	14	10	5330	763	66	20	67036	2170	66	20	66786	2145	66	20	66536	2120	14.0	13.95	13.87	13.87
	CA_2A-46A-48C-66A	2	20	18900	1890	1	0	900	1960	46	20	46890	5160																

Downlink Carrier Aggregation Scenarios Conducted Power (Reduction) - Tablet

Configure	Combination	PCC								SCC1				SCC2				SCC3				SCC4				Measurement Power			
		LTE Band	BW [Mhz]	UL Channel	UL Freq. [MHz]	UL RB	UL Offset	DL Channel	DL Freq. [MHz]	LTE Band	BW [Mhz]	DL Channel	DL Freq. [MHz]	LTE Band	BW [Mhz]	DL Channel	DL Freq. [MHz]	LTE Band	BW [Mhz]	DL Channel	DL Freq. [MHz]	LTE Band	BW [Mhz]	DL Channel	DL Freq. [MHz]	Maximum Tune-up Power	Single Carrier Tx Power without DL-CA Active (dBm)	Tx Power with DL-CA Active (dBm)	
																												PCC	Total
Inter Band	CA_2A-13A-48D	2	20	18900	1880	1	0	900	1960	13	10	5230	751	46	20	46892	5160.2	46	20	47090	5180	46	20	47288	5199.8	14.0	13.95	13.94	13.94
	CA_2A-13A-48D	2	20	18900	1880	1	0	900	1960	13	10	5230	751	48	20	56244	3650.4	48	20	56442	3670.2	48	20	56640	3690	14.0	13.95	13.91	13.91
	CA_5A-48A-48C-66A	5	10	20525	836.5	1	0	2525	881.5	48	20	56210	3647	48	20	56442	3670.2	48	20	56640	3690	66	20	67036	2170	18.5	18.43	18.41	18.41
	CA_13A-48A-48C-66A	13	10	23230	782	1	0	5230	751	48	20	56210	3647	48	20	56442	3670.2	48	20	56640	3690	66	20	67036	2170	17	16.97	16.94	16.94
	CA_2A-4A-5A-30A	2	20	18900	1880	1	0	900	1960	4	20	2175	2132.5	5	10	2450	874	30	10	9820	2355					14	13.95	13.92	13.92
	CA_2A-4A-12A-30A	2	20	18900	1880	1	0	900	1960	4	20	2175	2132.5	12	10	5094	737.4	30	10	9820	2355					14	13.95	13.89	13.89
	CA_2A-5A-30A-66A	2	20	18900	1880	1	0	900	1960	5	10	2450	874	30	10	9820	2355	66	20	67036	2170					14	13.95	13.87	13.87
	CA_2A-5A-48A-48A-66A	2	20	18900	1880	1	0	900	1960	5	10	2450	874	48	20	55780	3803	48	20	56640	3690	66	20	67036	2170	14	13.95	13.89	13.89
	CA_2A-5B-30A-66A	2	20	18900	1880	1	0	900	1960	5	10	2450	874	5	10	2549	883.9	30	10	9820	2355	66	20	67036	2170	14	13.95	13.85	13.85
	CA_2A-12A-30A-66A-66A	2	20	18900	1880	1	0	900	1960	12	10	5094	737.4	30	10	9820	2355	66	20	67036	2170	66	20	66786	2145	14	13.95	13.94	13.94
	CA_2A-13A-48A-48A-66A	2	20	18900	1880	1	0	900	1960	13	10	5230	751	48	20	56210	3647	48	20	56012	3627.2	66	20	67036	2170	14	13.95	13.87	13.87
	CA_2A-13A-48C-66A	2	20	18900	1880	1	0	900	1960	13	10	5230	751	48	20	56442	3670.2	48	20	56640	3690	66	20	67036	2170	14	13.95	13.82	13.82
	CA_2A-14A-30A-66A-66A	2	20	18900	1880	1	0	900	1960	14	10	5330	763	30	10	9820	2355	66	20	67036	2170	66	20	66786	2145	14	13.95	13.86	13.86
	CA_2A-5A-48C-66A	2	20	18900	1880	1	0	900	1960	5	10	2450	874	48	20	56442	3670.2	48	20	56640	3690	66	20	67036	2170	14	13.95	13.87	13.87

Downlink Carrier Aggregation Scenarios Conducted Power (Reduction) - Laptop

Configure	Combination	PCC								SCC1				SCC2				SCC3				SCC4				Measurement Power				
		LTE Band	BW [Mhz]	UL Channel	UL Freq. [MHz]	UL RB	UL Offset	DL Channel	DL Freq. [MHz]	LTE Band	BW [Mhz]	DL Channel	DL Freq. [MHz]	LTE Band	BW [Mhz]	DL Channel	DL Freq. [MHz]	LTE Band	BW [Mhz]	DL Channel	DL Freq. [MHz]	LTE Band	BW [Mhz]	DL Channel	DL Freq. [MHz]	Maximum Tune-up Power	Single Carrier Tx Power without DL-CA Active (dBm)	Tx Power with DL-CA Active (dBm)		
																												PCC	Total	
Inter Band	CA_13A-46E	13	10	23230	782	1	0	5230	751	46	20	46890	5160	46	20	47088	5179.8	46	20	47289	5199.9	46	20	47490	5220	20.0	19.95	19.94	19.94	
	CA_13A-48C-48C	13	10	23230	782	1	0	5230	751	48	20	55340	3560	48	20	55538	3579.8	48	20	56210	3647	48	20	56408	3666.8	20.0	19.95	19.89	19.89	
	CA_13A-48E	13	10	23230	782	1	0	5230	751	48	20	55340	3560	48	20	55538	3579.8	48	20	55736	3599.6	48	20	55934	3619.4	20.0	19.95	19.87	19.87	
	CA_48A-48C-66B	48	20	56210	3647	1	0	56210	3647	48	20	56442	3670.2	48	20	56640	3690	66	10	67086	2175	66	10	66987	2165.1	18.0	17.75	17.73	17.73	
	CA_48A-48C-66C	48	20	56210	3647	1	0	56210	3647	48	20	56442	3670.2	48	20	56640	3690	66	20	67036	2170	66	20	66838	2150.2	18.0	17.75	17.71	17.71	
	CA_48A-48D-66A	48	20	56210	3647	1	0	56210	3647	48	20	56244	3650.4	48	20	56442	3670.2	48	20	56640	3690	66	20	67036	2170	18.0	17.75	17.68	17.68	
	CA_48C-48C-66A	48	20	56210	3647	1	0	56210	3647	48	20	56408	3666.8	48	20	55340	3560	48	20	55538	3579.8	66	20	67036	2170	18.0	17.75	17.64	17.64	
	CA_48C-66A-66A-66A	48	20	56210	3647	1	0	56210	3647	48	20	56408	3666.8	66	20	67036	2170	66	20	66786	2145	66	20	66536	2120	18.0	17.75	17.63	17.63	
	CA_48E-66A	48	20	55340	3560	1	0	55340	3560	48	20	55538	3579.8	48	20	55736	3599.6	48	20	55934	3619.4	66	20	67036	2170	18.0	17.76	17.72	17.72	
	CA_2A-4A-7A	2	20	18900	1880	1	0	900	1960	4	20	2175	2132.5	7	20	3100	2655										16.0	15.95	15.91	15.91
	CA_2A-4A-13A	2	20	18900	1880	1	0	900	1960	4	20	2175	2132.5	13	10	5230	751										16.0	15.95	15.90	15.90
	CA_2A-5A-46A	2	20	18900	1880	1	0	900	1960	5	10	2450	874	46	20	50665	5537.5										16.0	15.95	15.85	15.85
	CA_2A-13A-46A	2	20	18900	1880	1	0	900	1960	13	10	5230	751	46	20	50665	5537.5										16.0	15.95	15.88	15.88
	CA_2A-29A-30A	2	20	18900	1880	1	0	900	1960	29	10	9715	722.5	30	10	9820	2355										16.0	15.95	15.92	15.92
	CA_2A-46A-48A	2	20	18900	1880	1	0	900	1960	46	20	50665	5537.5	48	20	56210	3647										16.0	15.95	15.91	15.91
	CA_4A-7A-28A	4	20	20175	1732.5	1	0	2175	2132.5	7	20	3100	2655	28	20	9435	780.5										16.5	16.30	16.25	16.25
	CA_4A-29A-30A	4	20	20175	1732.5	1	0	2175	2132.5	29	10	9715	722.5	30	10	9820	2355										16.5	16.30	16.23	16.23
	CA_5A-46A-66A	5	10	20525	836.5	1	0	2525	881.5	46	20	50665	5537.5	66	20	67036	2170										19.5	19.07	18.93	18.93
	CA_13A-46A-66A	13	10	23230	782	1	0	5230	751	46	20	50665	5537.5	66	20	67036	2170										20.0	19.95	19.91	19.91
	CA_2A-2A-4A-5A	2	20	18900	1880	1	0	900	1960	2	20	700	1940	4	20	2175	2132.5	5	10	2450	874						16.0	15.95	15.94	15.94
	CA_2A-2A-4A-12A	2	20	18900	1880	1	0	900	1960	2	20	700	1940	4	20	2175	2132.5	12	10	5094	737.4						16.0	15.95	15.89	15.89
	CA_2A-2A-46C	2	20	18900	1880	1	0	900	1960	2	20	700	1940	46	20	54142	5885.2	46	20	54340	5905						16.0	15.95	15.83	15.83
	CA_2A-4A-4A-5A	2	20	18900	1880	1	0	900	1960	4	20	2050	2120	4	20	2300	2145	5	10	2450	874						16.0	15.95	15.87	15.87
	CA_2A-4A-4A-12A	2	20	18900	1880	1	0	900	1960	4	20	2050	2120	4	20	2300	2145	12	10	5094	737.4						16.0	15.95	15.92	15.92
	CA_2A-4A-5B	2	20	18900	1880	1	0	900	1960	4	20	2175	2132.5	5	10	2450	874	5	10	2549	883.9						16.0	15.95	15.90	15.90
	CA_2A-5A-46C	2	20	18900	1880	1	0	900	1960	5	10	2549	883.9	46	20	54142	5885.2	46	20	54340	5905						16.0	15.95	15.92	15.92
	CA_2A-12A-66C	2	20	18900	1880	1	0	900	1960	12	10	5094	737.4	66	20	67036	2170	66	20	66838	2150.2						16.0	15.95	15.91	15.91
	CA_2A-13A-46C	2	20	18900	1880	1	0	900	1960	13	10	5230	751	46	20	54142	5885.2	46	20	54340	5905						16.0	15.95	15.89	15.89
	CA_2A-13A-66C	2	20	18900	1880	1	0	900	1960	13	10	5230	751	66	20	67036	2170	66	20	66838	2150.2						16.0	15.95	15.85	15.85
	CA_2A-46A-48C	2	20	18900	1880	1	0	900	1960	46	20	46890	5160	48	20	56442	3670.2	48	20	56640	3690						16.0	15.95	15.81	15.81
	CA_2A-46C-48A	2	20	18900	1880	1	0	900	1960	46	20	50665	5537.5	46	20	50863	5557.3	48	20	56210	3647						16.0	15.95	15.83	15.83
	CA_4A-4A-12A-30A	4	20	20300	1745	1	0	2300	2145	4	20	2050	2120	12	10	5094	737.4	30	10	9820	2355						16.5	16.25	16.14	16.14
	CA_5A-46C-66A	5	10	20525	836.5	1	0	2525	881.5	46	20	50665	5537.5	46	20	50863	5557.3	66	20	67036	2170						19.5	19.07	19.02	19.02
	CA_13A-46C-66A	13	10	23230	782	1	0	5230	751	46	20	50665	5537.5	46	20	50863	5557.3	66	20	67036	2170						20	19.95	19.93	19.93
	CA_13A-48A-66B	13	10	23230	782	1	0	5230	751	48	20	56210	3647	66	10	67086	2175	66	10	66987	2165.1						20	19.95	19.91	19.91
	CA_13A-48A-66C	13	10	23230	782	1	0	5230	751	48	20	56210	3647	66	20	67036	2170	66	20	66838	2150.2						20	19.95	19.94	19.94
	CA_2A-2A-5A-66A-66A	2	20	18900	1880	1	0	900	1960	2	20	700	1940	5	10	2450	874	66	20	67036	2170	66	20	66786	2145	16	15.95	15.88	15.88	
	CA_2A-2A-5A-66B	2	20	18900	1880	1	0	900	1960	2	20	700	1940	5	10	2450	874	66	10	67086	2175	66	10	66987	2165.1	16	15.95	15.89	15.89	
	CA_2A-2A-5A-66C	2	20	18900	1880	1	0	900	1960	2	20	700	1940	5	10	2450	874	66	20	67036	2170	66	20	66838	2150.2	16	15.95	15.91	15.91	
	CA_2A-2A-12A-66A-66A	2	20	18900	1880	1	0	900	1960	2	20	700	1940	12	10	5094	737.4	66	20	67036	2170	66	20	66786	2145	16	15.95	15.85	15.85	
	CA_2A-2A-13A-66A-66A	2	20	18900	1880	1	0	900	1960	2	20	700	1940	13	10	5230	751	66	20	67036	2170	66	20	66786	2145	16	15.95	15.81	15.81	
	CA_2A-2A-13A-66B	2	20	18900	1880	1	0	900	1960	2	20	700	1940	13	10	5230	751	66	10	67086	2175	66	10	66987	2165.1	16	15.95	15.94	15.94	
	CA_2A-2A-14A-66A-66A	2	20	18900	1880	1	0	900	1960	2	20	700	1940	14	10	5330	763	66	20	67036	2170	66	20	66786	2145	16	15.95	15.90	15.90	
	CA_2A-5A-46D	2	20	18900	1880	1	0	900	1960	5	10	2450	874	46	20	53942	5865.2	46	20	54140	5885	46	20	54338	5904.8	16	15.95	15.89	15.89	
	CA_2A-5A-48A-48C	2	20	18900	1880	1	0	900	1960	5	10	2450	874	48	20	56210	3647	48	20	56442	3670.2	48	20	56640	3690	16	15.95	15.86	15.86	
	CA_2A-5A-48D	2	20	18900	1880	1	0	900	1960	5	10	2450	874	48	20	56244	3650.4	48	20	56442	3670.2	48	20	56640	3690	16	15.95	15.92	15.92	
	CA_2A-5B-66A-66A	2	20	18900	1880	1	0	900	1960	5	10	2450	874	5	10	2549	883.9	66	20	67036	2170	66	20	66786	2145	16	15.95	15.91	15.91	
	CA_2A-5B-66B	2	20	18900	1880	1	0	900	1960	5	10	2450	874	5	10	2549	883.9	66	10	67086	2175	66	10	66987	2165.1	16	15.95	15.81	15.81	
	CA_2A-5B-66C	2	20	18900	1880	1	0	900	1960																					

Downlink Carrier Aggregation Scenarios Conducted Power (Reduction) - Laptop

Configure	Combination	PCC								SCC1				SCC2				SCC3				SCC4				Measurement Power			
		LTE Band	BW [Mhz]	UL Channel	UL Freq. [MHz]	UL RB	UL Offset	DL Channel	DL Freq. [MHz]	LTE Band	BW [Mhz]	DL Channel	DL Freq. [MHz]	LTE Band	BW [Mhz]	DL Channel	DL Freq. [MHz]	LTE Band	BW [Mhz]	DL Channel	DL Freq. [MHz]	LTE Band	BW [Mhz]	DL Channel	DL Freq. [MHz]	Maximum Tune-up Power	Single Carrier Tx Power without DL-CA Active (dBm)	Tx Power with DL-CA Active (dBm)	
																												PCC	Total
Inter Band	CA_13A-46D-66A	13	10	23230	782	1	0	5230	751	46	20	46892	5160.2	46	20	47090	5180	46	20	47288	5199.8	66	20	66536	2120	20	19.95	19.93	19.93
	CA_13A-48C-66B	13	10	23230	782	1	0	5230	751	48	20	56210	3647	48	20	56012	3627.2	66	10	67086	2175	66	10	66987	2165.1	20	19.95	19.88	19.88
	CA_13A-48C-66C	13	10	23230	782	1	0	5230	751	48	20	56210	3647	48	20	56012	3627.2	66	20	67036	2170	66	20	66838	2150.2	20	19.95	19.89	19.89
	CA_13A-48D-66A	13	10	23230	782	1	0	5230	751	48	20	56244	3650.4	48	20	56442	3670.2	48	20	56640	3690	66	20	67036	2170	20	19.95	19.92	19.92
	CA_2A-13A-46D	2	20	18900	1880	1	0	900	1960	13	10	5230	751	46	20	46892	5160.2	46	20	47090	5180	46	20	47288	5199.8	16	15.95	15.88	15.88
	CA_2A-13A-48D	2	20	18900	1880	1	0	900	1960	13	10	5230	751	48	20	56244	3650.4	48	20	56442	3670.2	48	20	56640	3690	16	15.95	15.86	15.86
	CA_5A-48A-48C-66A	5	10	20525	836.5	1	0	2525	881.5	48	20	56210	3647	48	20	56442	3670.2	48	20	56640	3690	66	20	67036	2170	19.5	19.07	19.03	19.03
	CA_13A-48A-48C-66A	13	10	23230	782	1	0	5230	751	48	20	56210	3647	48	20	56442	3670.2	48	20	56640	3690	66	20	67036	2170	20	19.95	19.89	19.89
	CA_2A-4A-5A-30A	2	20	18900	1880	1	0	900	1960	4	20	2175	2132.5	5	10	2450	874	30	10	9820	2355					16	15.95	15.89	15.89
	CA_2A-4A-12A-30A	2	20	18900	1880	1	0	900	1960	4	20	2175	2132.5	12	10	5094	737.4	30	10	9820	2355					16	15.95	15.91	15.91
	CA_2A-5A-30A-66A	2	20	18900	1880	1	0	900	1960	5	10	2450	874	30	10	9820	2355	66	20	67036	2170					16	15.95	15.90	15.90
	CA_2A-5A-48A-48A-66A	2	20	18900	1880	1	0	900	1960	5	10	2450	874	48	20	55780	3603	48	20	56640	3690	66	20	67036	2170	16	15.95	15.94	15.94
	CA_2A-5B-30A-66A	2	20	18900	1880	1	0	900	1960	5	10	2450	874	5	10	2549	883.9	30	10	9820	2355	66	20	67036	2170	16	15.95	15.86	15.86
	CA_2A-12A-30A-66A-66A	2	20	18900	1880	1	0	900	1960	12	10	5094	737.4	30	10	9820	2355	66	20	67036	2170	66	20	66786	2145	16	15.95	15.90	15.90
	CA_2A-13A-48A-48A-66A	2	20	18900	1880	1	0	900	1960	13	10	5230	751	48	20	56210	3647	48	20	56012	3627.2	66	20	67036	2170	16	15.95	15.88	15.88
	CA_2A-13A-48C-66A	2	20	18900	1880	1	0	900	1960	13	10	5230	751	48	20	56442	3670.2	48	20	56640	3690	66	20	67036	2170	16	15.95	15.83	15.83
	CA_2A-14A-30A-66A-66A	2	20	18900	1880	1	0	900	1960	14	10	5330	763	30	10	9820	2355	66	20	67036	2170	66	20	66786	2145	16	15.95	15.81	15.81
	CA_2A-5A-48C-66A	2	20	18900	1880	1	0	900	1960	5	10	2450	874	48	20	56442	3670.2	48	20	56640	3690	66	20	67036	2170	16	15.95	15.85	15.85

Downlink Carrier Aggregation Scenarios Conducted Power (Full)

Configure	Combination	PCC								SCC1				SCC2				SCC3				SCC4				Measurement Power			
		LTE Band	BW [Mhz]	UL Channel	UL Freq. [MHz]	UL RB	UL Offset	DL Channel	DL Freq. [MHz]	LTE Band	BW [Mhz]	DL Channel	DL Freq. [MHz]	LTE Band	BW [Mhz]	DL Channel	DL Freq. [MHz]	LTE Band	BW [Mhz]	DL Channel	DL Freq. [MHz]	LTE Band	BW [Mhz]	DL Channel	DL Freq. [MHz]	Maximum Tune-up Power	Single Carrier Tx Power without DL-CA Active (dBm)	Tx Power with DL-CA Active (dBm)	
																												PCC	Total
Intra Band Contiguous	CA_38C	38	20	38150	2610	1	0	38150	2610	38	20	37952	2590.2													24.0	23.60	23.55	23.55
	CA_41E	41	20	39750	2506	1	0	39750	2506	41	20	39950	2526	41	20	40150	2546	41	20	40350	2566					24.0	23.83	23.73	23.73
	CA_41F	41	20	39750	2506	1	0	39750	2506	41	20	39948	2525.8	41	20	40146	2545.6	41	20	40344	2565.4	41	20	40542	2585.2	24.0	23.83	23.71	23.71
	CA_48F	48	20	55340	3560	1	0	55340	3560	48	20	55538	3579.8	48	20	55736	3599.6	48	20	55934	3619.4	48	20	56132	3639.2	22.0	21.71	21.65	21.65
Intra Band Non-Contiguous	CA_25A-25A	25	20	26140	1860	1	0	8140	1940	25	20	8590	1985													24.0	22.99	22.97	22.97
	CA_41A-41A	41	20	39750	2506	1	0	39750	2506	41	20	41490	2680													24.0	23.83	23.81	23.81
	CA_41A-41C	41	20	39750	2506	1	0	39750	2506	41	20	41292	2660.2	41	20	41490	2680									24.0	23.83	23.77	23.77
	CA_48A-48A-48A	48	20	55340	3560	1	0	55340	3560	48	20	55780	3603	48	20	56640	3690									22.0	21.71	21.66	21.66
	CA_66A-66C	66	20	132072	17200	1	0	66536	2120	66	20	67038	2170.2	66	20	67236	2190									24.0	23.41	23.35	23.35
	CA_41A-41D	41	20	39750	2506	1	0	39750	2506	41	20	41094	2640.4	41	20	41292	2660.2	41	20	41490	2680					24.0	23.83	23.73	23.73
	CA_41C-41C	41	20	39750	2506	1	0	39750	2506	41	20	39948	2525.8	41	20	41292	2660.2	41	20	41490	2680					24.0	23.83	23.75	23.75
	CA_48A-48A-48C	48	20	55340	3560	1	0	55340	3560	48	20	55780	3603	48	20	56442	3670.2	48	20	56640	3690					22.0	21.71	21.65	21.65
	CA_48A-48A-48D	48	20	55340	3560	1	0	55340	3560	48	20	55780	3603	48	20	56244	3650.4	48	20	56442	3670.2	48	20	56640	3690	22.0	21.71	21.61	21.61
	CA_48A-48C-48C	48	20	55340	3560	1	0	55340	3560	48	20	55780	3603	48	20	55968	3622.8	48	20	56442	3670.2	48	20	56640	3690	22.0	21.71	21.68	21.68
Inter Band	CA_2A-7A	2	20	19100	1900	1	0	1100	1980	7	20	3100	2655													24.0	23.01	22.99	22.99
	CA_4A-48A	4	20	20050	1720	1	0	2050	2120	48	20	56210	3647													24.0	23.37	23.25	23.25
	CA_25A-26A	25	20	26140	1860	1	0	8140	1940	26	15	8865	876.5													24.0	22.99	22.91	22.91
	CA_41A-46A	41	20	39750	2506	1	0	39750	2506	46	20	46890	5160													24.0	23.83	23.81	23.81
	CA_26A-41A	26	15	26765	821.5	1	0	8785	866.5	41	20	40620	2593													24.0	23.10	22.98	22.98
	CA_2A-2A-46A	2	20	19100	1900	1	0	1100	1980	2	20	900	1960	46	20	46890	5160									24.0	23.01	22.99	22.99
	CA_4A-4A-13A	4	20	20050	17200	1	0	2050	2120	4	20	2300	2145	13	10	5230	751									24.0	23.37	23.33	23.33
	CA_4A-46A-46A	4	20	20050	17200	1	0	2050	2120	46	20	46890	5160	46	20	54340	5905									24.0	23.37	23.32	23.32
	CA_4A-46C	4	20	20050	17200	1	0	2050	2120	46	20	46890	5160	46	20	47088	5179.8									24.0	23.37	23.27	23.27
	CA_4A-48C	4	20	20050	17200	1	0	2050	2120	48	20	56210	3647	48	20	56012	3627.2									24.0	23.37	23.35	23.35
	CA_5A-7A-7A	5	10	20450	829	1	0	2450	874	7	20	3100	2655	7	20	3350	2680									24.0	23.29	23.21	23.21
	CA_5B-46A	5	10	20450	829	1	0	2450	874	5	10	2549	883.9	46	20	46890	5160									24.0	23.29	23.25	23.25
	CA_26A-41C	26	15	26765	821.5	1	0	8785	866.5	41	20	41292	2660.2	41	20	41490	2680									24.0	23.10	23.06	23.06
	CA_41A-46C	41	20	39750	2506	1	0	39750	2506	46	20	46890	5160	46	20	47088	5179.8									24.0	23.83	23.74	23.74
	CA_2A-2A-4A-4A	2	20	19100	1900	1	0	1100	1980	2	20	900	1960	4	20	2050	2120	4	20	2300	2145					24.0	23.01	22.83	22.83
	CA_2A-46A-46A-66A	2	20	19100	1900	1	0	1100	1980	46	20	46890	5160	46	20	54340	5905	66	20	67036	2170					24.0	23.01	22.85	22.85
	CA_2C-66A-66A	2	20	19100	1900	1	0	1100	1980	2	20	898	1959.8	66	20	66536	2120	66	20	67236	2190					24.0	23.01	22.92	22.92
	CA_4A-4A-5B	4	20	20050	1720	1	0	2050	2120	4	20	2300	2145	5	10	2476	876.6	5	10	2575	886.5					24.0	23.37	23.31	23.31
	CA_4A-46A-46C	4	20	20050	1720	1	0	2050	2120	46	20	46890	5160	46	20	50692	5540.2	46	20	50892	5560					24.0	23.37	23.29	23.29
	CA_4A-46D	4	20	20050	1720	1	0	2050	2120	46	20	53942	5865.2	46	20	54140	5885	46	20	54338	5904.8					24.0	23.37	23.35	23.35
	CA_4A-48D	4	20	20050	1720	1	0	2050	2120	48	20	56244	3650.4	48	20	56442	3670.2	48	20	56640	3690					24.0	23.37	23.27	23.27
	CA_5A-5A-66A-66A	5	10	20450	829	1	0	2450	874	5	10	2600	889	66	20	66536	2120	66	20	67236	2190					24.0	23.29	23.22	23.22
	CA_5A-5A-66B	5	10	20450	829	1	0	2450	874	5	10	2600	889	66	10	67086	2175	66	10	66987	2165.1					24.0	23.29	23.17	23.17
	CA_5A-5A-66C	5	10	20450	829	1	0	2450	874	5	10	2600	889	66	20	67036	2170	66	20	66838	2150.2					24.0	23.29	23.23	23.23
	CA_5B-66C	5	10	20450	829	1	0	2450	874	5	10	2549	883.9	46	20	50692	5540.2	46	20	50892	5560					24.0	23.29	23.21	23.21
	CA_30A-66A-66A-66A	30	10	27710	2310	1	0	8920	2355	66	20	67036	2170	66	20	66786	2145	66	20	66536	2120					24.0	23.21	23.16	23.16
	CA_48A-48A-66A-66A	48	20	55340	3560	1	0	55340	3560	48	20	56640	3690	66	20	66786	2145	66	20	66536	2120					22.0	21.71	21.63	21.63
	CA_48A-48A-66B	48	20	55340	3560	1	0	55340	3560	48	20	56640	3690	66	10	67086	2175	66	10	66987	2165.1					22.0	21.71	21.66	21.66
	CA_48A-48A-66C	48	20	55340	3560	1	0	55340	3560	48	20	56640	3690	66	20	67036	2170	66	20	66838	2150.2					22.0	21.71	21.58	21.58
	CA_48A-66A-66A-66A	48	20	55340	3560	1	0	55340	3560	66	20	67036	2170	66	20	66786	2145	66	20	66536	2120					22.0	21.71	21.69	21.69
	CA_2A-2A-46D	2	20	19100	1900	1	0	1100	1980	2	20	900	1960	46	20	53942	5865.2	46	20	54140	5885	46	20	54338	5904.8	24.0	23.01	22.98	22.98

Downlink Carrier Aggregation Scenarios Conducted Power (Full)

Configure	Combination	PCC								SCC1				SCC2				SCC3				SCC4				Measurement Power			
		LTE Band	BW [Mhz]	UL Channel	UL Freq. [MHz]	UL RB	UL Offset	DL Channel	DL Freq. [MHz]	LTE Band	BW [Mhz]	DL Channel	DL Freq. [MHz]	LTE Band	BW [Mhz]	DL Channel	DL Freq. [MHz]	LTE Band	BW [Mhz]	DL Channel	DL Freq. [MHz]	LTE Band	BW [Mhz]	DL Channel	DL Freq. [MHz]	Maximum Tune-up Power	Single Carrier Tx Power without DL-CA Active (dBm)	Tx Power with DL-CA Active (dBm)	
																												PCC	Total
Inter Band	CA_13A-46E	13	10	23230	782	1	0	5230	751	46	20	46890	5160	46	20	47088	5179.8	46	20	47289	5199.9	46	20	47490	5220	24.0	23.42	23.39	23.39
	CA_13A-48C-48C	13	10	23230	782	1	0	5230	751	48	20	55340	3560	48	20	55538	3579.8	48	20	56210	3647	48	20	56408	3666.8	24.0	23.42	23.35	23.35
	CA_13A-48E	13	10	23230	782	1	0	5230	751	48	20	55340	3560	48	20	55538	3579.8	48	20	55736	3599.6	48	20	55934	3619.4	24.0	23.42	23.31	23.31
	CA_48A-48C-66B	48	20	55340	3560	1	0	55340	3560	48	20	56210	3647	48	20	56408	3666.8	66	10	67086	2175	66	10	66987	2165.1	22.0	21.71	21.65	21.65
	CA_48A-48C-66A	48	20	55340	3560	1	0	55340	3560	48	20	56210	3647	48	20	56408	3666.8	66	20	67036	2170	66	20	66838	2150.2	22.0	21.71	21.62	21.62
	CA_48A-48D-66C	48	20	55340	3560	1	0	55340	3560	48	20	56244	3650.4	48	20	56442	3670.2	48	20	56640	3690	66	20	67036	2170	22.0	21.71	21.63	21.63
	CA_48C-48C-66A	48	20	55340	3560	1	0	55340	3560	48	20	55538	3579.8	48	20	56210	3647	48	20	56408	3666.8	66	20	67036	2170	22.0	21.71	21.58	21.58
	CA_48C-66A-66A-66A	48	20	55340	3560	1	0	55340	3560	48	20	55538	3579.8	66	20	67036	2170	66	20	56786	2145	66	20	66536	2120	22.0	21.71	21.62	21.62
	CA_48E-66A	48	20	55340	3560	1	0	55340	3560	48	20	55538	3579.8	48	20	56736	3599.6	48	20	55934	3619.4	66	20	67036	2170	22.0	21.71	21.66	21.66
	CA_2A-4A-7A	2	20	19100	1900	1	0	1100	1980	4	20	2175	2132.5	7	20	3100	2655									24.0	23.01	22.94	22.94
	CA_2A-4A-13A	2	20	19100	1900	1	0	1100	1980	4	20	2175	2132.5	13	10	5230	751									24.0	23.01	22.86	22.86
	CA_2A-5A-46A	2	20	19100	1900	1	0	1100	1980	5	10	2450	874	46	20	50665	5537.5									24.0	23.01	22.81	22.81
	CA_2A-13A-46A	2	20	19100	1900	1	0	1100	1980	13	10	5230	751	46	20	50665	5537.5									24.0	23.01	22.89	22.89
	CA_2A-29A-30A	2	20	19100	1900	1	0	1100	1980	29	10	9715	722.5	30	10	9820	2355									24.0	23.01	22.93	22.93
	CA_2A-46A-48A	2	20	19100	1900	1	0	1100	1980	46	20	50665	5537.5	48	20	56210	3647									24.0	23.01	22.97	22.97
	CA_4A-7A-28A	4	20	20050	1720	1	0	2050	2120	7	20	3100	2655	28	20	9435	780.5									24.0	23.37	23.32	23.32
	CA_4A-29A-30A	4	20	20050	1720	1	0	2050	2120	29	10	9715	722.5	30	10	9820	2355									24.0	23.37	23.31	23.31
	CA_5A-46A-66A	5	10	20450	829	1	0	2450	874	46	20	50665	5537.5	66	20	67036	2170									24.0	23.29	23.15	23.15
	CA_13A-46A-66A	13	10	23230	782	1	0	5230	751	46	20	50665	5537.5	66	20	67036	2170									24.0	23.42	23.27	23.27
	CA_2A-2A-4A-5A	2	20	19100	1900	1	0	1100	1980	2	20	900	1960	4	20	2175	2132.5	5	10	2450	874					24.0	23.01	22.93	22.93
	CA_2A-2A-4A-12A	2	20	19100	1900	1	0	1100	1980	2	20	900	1960	4	20	2175	2132.5	12	10	5094	737.4					24.0	23.01	22.87	22.87
	CA_2A-2A-46C	2	20	19100	1900	1	0	1100	1980	2	20	900	1960	46	20	54142	5885.2	46	20	54340	5905					24.0	23.01	22.84	22.84
	CA_2A-4A-4A-5A	2	20	19100	1900	1	0	1100	1980	4	20	2050	2120	4	20	2300	2145	5	10	2450	874					24.0	23.01	22.82	22.82
	CA_2A-4A-4A-12A	2	20	19100	1900	1	0	1100	1980	4	20	2050	2120	4	20	2300	2145	12	10	5094	737.4					24.0	23.01	22.96	22.96
	CA_2A-4A-5B	2	20	19100	1900	1	0	1100	1980	4	20	2175	2132.5	5	10	2450	874	5	10	2549	883.9					24.0	23.01	22.97	22.97
	CA_2A-5A-46C	2	20	19100	1900	1	0	1100	1980	5	10	2549	883.9	46	20	54142	5885.2	46	20	54340	5905					24.0	23.01	22.86	22.86
	CA_2A-12A-66C	2	20	19100	1900	1	0	1100	1980	12	10	5094	737.4	66	20	67036	2170	66	20	66838	2150.2					24.0	23.01	22.84	22.84
	CA_2A-13A-46C	2	20	19100	1900	1	0	1100	1980	13	10	5230	751	46	20	54142	5885.2	46	20	54340	5905					24.0	23.01	22.89	22.89
	CA_2A-13A-66C	2	20	19100	1900	1	0	1100	1980	13	10	5230	751	66	20	67036	2170	66	20	66838	2150.2					24.0	23.01	22.85	22.85
	CA_2A-46A-48C	2	20	19100	1900	1	0	1100	1980	46	20	46890	5160	48	20	56442	3670.2	48	20	56640	3690					24.0	23.01	22.94	22.94
	CA_2A-46C-48A	2	20	19100	1900	1	0	1100	1980	46	20	50665	5537.5	46	20	50863	5557.3	48	20	56210	3647					24.0	23.01	22.96	22.96
	CA_4A-4A-12A-30A	4	20	20050	1720	1	0	2050	2120	4	20	2300	2145	12	10	5094	737.4	30	10	9820	2355					24.0	23.37	23.33	23.33
	CA_5A-46C-66A	5	10	20450	829	1	0	2450	874	46	20	50665	5537.5	46	20	50863	5557.3	66	20	67036	2170					24.0	23.29	23.24	23.24
	CA_13A-46C-66A	13	10	23230	782	1	0	5230	751	46	20	50665	5537.5	46	20	50863	5557.3	66	20	67036	2170					24.0	23.42	23.34	23.34
	CA_13A-48A-66B	13	10	23230	782	1	0	5230	751	48	20	56210	3647	66	10	67086	2175	66	10	66987	2165.1					24.0	23.42	23.36	23.36
	CA_13A-48A-66C	13	10	23230	782	1	0	5230	751	48	20	56210	3647	66	20	67036	2170	66	20	66838	2150.2					24.0	23.42	23.37	23.37
	CA_2A-2A-5A-66A-66A	2	20	19100	1900	1	0	1100	1980	2	20	900	1960	5	10	2450	874	66	20	67036	2170	66	20	66786	2145	24.0	23.01	22.98	22.98
	CA_2A-2A-5A-66B	2	20	19100	1900	1	0	1100	1980	2	20	900	1960	5	10	2450	874	66	10	67086	2175	66	10	66987	2165.1	24.0	23.01	22.94	22.94
	CA_2A-2A-5A-66C	2	20	19100	1900	1	0	1100	1980	2	20	900	1960	5	10	2450	874	66	20	67036	2170	66	20	66838	2150.2	24.0	23.01	22.91	22.91
	CA_2A-2A-12A-66A-66A	2	20	19100	1900	1	0	1100	1980	2	20	900	1960	12	10	5094	737.4	66	20	67036	2170	66	20	66786	2145	24.0	23.01	22.89	22.89
	CA_2A-2A-13A-66A-66A	2	20	19100	1900	1	0	1100	1980	2	20	900	1960	13	10	5230	751	66	20	67036	2170	66	20	66786	2145	24.0	23.01	22.85	22.85
	CA_2A-2A-13A-66B	2	20	19100	1900	1	0	1100	1980	2	20	900	1960	13	10	5230	751	66	10	67086	2175	66	10	66987	2165.1	24.0	23.01	22.93	22.93
	CA_2A-2A-14A-66A-66A	2	20	19100	1900	1	0	1100	1980	2	20	900	1960	14	10	5330	763	66	20	67036	2170	66	20	66786	2145	24.0	23.01	22.94	22.94
	CA_2A-5A-46D	2	20	1																									

Downlink Carrier Aggregation Scenarios Conducted Power (Full)

Configure	Combination	PCC								SCC1				SCC2				SCC3				SCC4				Measurement Power			
		LTE Band	BW [Mhz]	UL Channel	UL Freq. [MHz]	UL RB	UL Offset	DL Channel	DL Freq. [MHz]	LTE Band	BW [Mhz]	DL Channel	DL Freq. [MHz]	LTE Band	BW [Mhz]	DL Channel	DL Freq. [MHz]	LTE Band	BW [Mhz]	DL Channel	DL Freq. [MHz]	LTE Band	BW [Mhz]	DL Channel	DL Freq. [MHz]	Maximum Tune-up Power	Single Carrier Tx Power without DL-CA Active (dBm)	Tx Power with DL-CA Active (dBm)	
																											PCC	Total	
Inter Band	CA_13A-46D-66A	13	10	23230	782	1	0	5230	751	46	20	46892	5160.2	46	20	47090	5180	46	20	47288	5199.8	66	20	66536	2120	24.0	23.42	23.34	23.34
	CA_13A-48C-66B	13	10	23230	782	1	0	5230	751	48	20	56210	3647	48	20	56012	3627.2	66	10	67086	2175	66	10	66987	2165.1	24.0	23.42	23.29	23.29
	CA_13A-48C-66C	13	10	23230	782	1	0	5230	751	48	20	56210	3647	48	20	56012	3627.2	66	20	67036	2170	66	20	66838	2150.2	24.0	23.42	23.25	23.25
	CA_13A-48D-66A	13	10	23230	782	1	0	5230	751	48	20	56244	3650.4	48	20	56442	3670.2	48	20	56640	3690	66	20	67036	2170	24.0	23.42	23.37	23.37
	CA_2A-13A-46D	2	20	19100	1900	1	0	1100	1980	13	10	5230	751	46	20	46892	5160.2	46	20	47090	5180	46	20	47288	5199.8	24.0	23.01	22.96	22.96
	CA_2A-13A-48D	2	20	19100	1900	1	0	1100	1980	13	10	5230	751	48	20	56244	3650.4	48	20	56442	3670.2	48	20	56640	3690	24.0	23.01	22.91	22.91
	CA_5A-48A-48C-66A	5	10	20450	829	1	0	2450	874	48	20	56210	3647	48	20	56442	3670.2	48	20	56640	3690	66	20	67036	2170	24.0	23.29	23.17	23.17
	CA_13A-48A-48C-66A	13	10	23230	782	1	0	5230	751	48	20	56210	3647	48	20	56442	3670.2	48	20	56640	3690	66	20	67036	2170	24.0	23.42	23.38	23.38
	CA_2A-4A-5A-30A	2	20	19100	1900	1	0	1100	1980	4	20	2175	2132.5	5	10	2450	874	30	10	9820	2355					24.0	23.01	22.92	22.92
	CA_2A-4A-12A-30A	2	20	19100	1900	1	0	1100	1980	4	20	2175	2132.5	12	10	5094	737.4	30	10	9820	2355					24.0	23.01	22.85	22.85
	CA_2A-5A-30A-66A	2	20	19100	1900	1	0	1100	1980	5	10	2450	874	30	10	9820	2355	66	20	67036	2170					24.0	23.01	22.87	22.87
	CA_2A-5A-48A-48A-66A	2	20	19100	1900	1	0	1100	1980	5	10	2450	874	48	20	55780	3603	48	20	56640	3690	66	20	67036	2170	24.0	23.01	22.93	22.93
	CA_2A-5B-30A-66A	2	20	19100	1900	1	0	1100	1980	5	10	2450	874	5	10	2549	883.9	30	10	9820	2355	66	20	67036	2170	24.0	23.01	22.95	22.95
	CA_2A-12A-30A-66A-66A	2	20	19100	1900	1	0	1100	1980	12	10	5094	737.4	30	10	9820	2355	66	20	67036	2170	66	20	66786	2145	24.0	23.01	22.91	22.91
	CA_2A-13A-48A-48A-66A	2	20	19100	1900	1	0	1100	1980	13	10	5230	751	48	20	56210	3647	48	20	56012	3627.2	66	20	67036	2170	24.0	23.01	22.86	22.86
	CA_2A-13A-48C-66A	2	20	19100	1900	1	0	1100	1980	13	10	5230	751	48	20	56442	3670.2	48	20	56640	3690	66	20	67036	2170	24.0	23.01	22.84	22.84
	CA_2A-14A-30A-66A-66A	2	20	19100	1900	1	0	1100	1980	14	10	5330	763	30	10	9820	2355	66	20	67036	2170	66	20	66786	2145	24.0	23.01	22.83	22.83
	CA_2A-5A-48C-66A	2	20	19100	1900	1	0	1100	1980	5	10	2450	874	48	20	56442	3670.2	48	20	56640	3690	66	20	67036	2170	24.0	23.01	22.81	22.81

WLAN Conducted Power (Laptop Mode)			
WLAN2.4GHz Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11b	1	2412	18.99
	6	2437	19.99
	11	2462	19.47
	12	2467	18.41
	13	2472	14.95
802.11g	1	2412	16.86
	6	2437	19.86
	11	2462	16.84
	12	2467	14.81
	13	2472	1.39
802.11n HT20	1	2412	16.91
	6	2437	19.91
	11	2462	15.32
	12	2467	14.91
	13	2472	1.35
802.11n HT40	3	2422	16.38
	6	2437	15.34
	9	2452	15.84
	10	2457	12.37
	11	2462	4.82
802.11ax HE20	1	2412	16.89
	6	2437	19.81
	11	2462	15.32
	12	2467	14.92
	13	2472	1.42
802.11ax HE40	3	2422	16.37
	6	2437	15.33
	9	2452	15.8
	10	2457	12.3
	11	2462	4.91

WLAN Conducted Power (Laptop Mode)			
WLAN2.4GHz Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11b	1	2412	19.42
	6	2437	19.99
	11	2462	19.49
	12	2467	18.43
	13	2472	14.98
802.11g	1	2412	16.89
	6	2437	19.86
	11	2462	16.89
	12	2467	14.8
	13	2472	1.32
802.11n HT20	1	2412	16.87
	6	2437	19.81
	11	2462	15.31
	12	2467	14.85
	13	2472	1.39
802.11n HT40	3	2422	16.37
	6	2437	15.37
	9	2452	14.3
	10	2457	12.31
	11	2462	4.81
802.11ax HE20	1	2412	16.83
	6	2437	19.88
	11	2462	15.36
	12	2467	14.87
	13	2472	1.34
802.11ax HE40	3	2422	16.39
	6	2437	15.4
	9	2452	14.83
	10	2457	12.33
	11	2462	4.91

WLAN Conducted Power (Laptop Mode)					
WLAN2.4GHz Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11b	1	2412			
	6	2437			
	11	2462			
	12	2467			
	13	2472			
802.11g	1	2412			
	6	2437			
	11	2462			
	12	2467			
	13	2472			
802.11n HT20	1	2412	13.96	13.98	16.98
	6	2437	17.48	17.46	20.48
	11	2462	14.96	14.97	17.98
	12	2467	11.96	11.98	14.98
	13	2472	-1.56	-1.58	1.44
802.11n HT40	3	2422	13.42	13.39	16.42
	6	2437	14.33	14.33	17.34
	9	2452	12.86	12.85	15.87
	10	2457	9.33	9.4	12.38
	11	2462	1.91	1.82	4.88
802.11ax HE20	1	2412	13.81	13.89	16.86
	6	2437	17.4	17.37	20.40
	11	2462	14.34	14.37	17.37
	12	2467	11.89	11.88	14.90
	13	2472	-1.61	-1.69	1.36
802.11ax HE40	3	2422	13.37	13.32	16.36
	6	2437	14.37	14.42	17.41
	9	2452	12.83	12.8	15.83
	10	2457	9.36	9.39	12.39
	11	2462	1.82	1.9	4.87

WLAN Conducted Power (Laptop Mode)			
Bluetooth Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
BR / EDR	0	2402	7.49
	39	2441	7.29
	78	2480	7.95
LE	0	2402	6.41
	19	2440	6.56
	39	2480	6.73

WLAN Conducted Power (Laptop Mode)			
WLAN 5.3GHz Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11a	52	5260	19.98
	56	5280	19.94
	60	5300	18.97
	64	5320	17.98
802.11n HT20	52	5260	19.88
	56	5280	19.89
	60	5300	18.84
	64	5320	17.86
802.11n HT40	54	5270	19.08
	62	5310	16.92
802.11ac VHT80	58	5290	17.09
802.11ac VHT160	50	5250	14.09
802.11ax HE20	52	5260	19.81
	56	5280	19.81
	60	5300	18.85
	64	5320	17.81
802.11ax HE40	54	5270	19.14
	62	5310	16.88
802.11ax HE80	58	5290	17.12
802.11ax HE160	50	5250	14.09

WLAN Conducted Power (Laptop Mode)			
WLAN 5.3GHz Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11a	52	5260	19.96
	56	5280	19.95
	60	5300	18.92
	64	5320	17.98
802.11n HT20	52	5260	19.89
	56	5280	19.8
	60	5300	18.91
	64	5320	17.89
802.11n HT40	54	5270	19.58
	62	5310	17.37
802.11ac VHT80	58	5290	17.12
802.11ac VHT160	50	5250	13.89
802.11ax HE20	52	5260	19.9
	56	5280	19.8
	60	5300	18.92
	64	5320	17.8
802.11ax HE40	54	5270	19.63
	62	5310	17.35
802.11ax HE80	58	5290	17.1
802.11ax HE160	50	5250	13.87

WLAN Conducted Power (Laptop Mode)					
WLAN 5.3GHz Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11a	52	5260			
	56	5280			
	60	5300			
	64	5320			
802.11n HT20	52	5260	17.49	17.48	20.5
	56	5280	17.46	17.45	20.47
	60	5300	15.98	15.96	18.98
	64	5320	14.98	14.96	17.98
802.11n HT40	54	5270	16.17	16.16	19.18
	62	5310	13.87	13.81	16.85
802.11ac VHT80	58	5290	14.17	14.09	17.14
802.11ac VHT160	50	5250	10.86	10.87	13.88
802.11ax HE20	52	5260	17.4	17.34	20.38
	56	5280	17.35	17.35	20.36
	60	5300	15.87	15.87	18.88
	64	5320	14.83	14.89	17.87
802.11ax HE40	54	5270	16.07	16.11	19.1
	62	5310	13.91	13.89	16.91
802.11ax HE80	58	5290	14.11	14.16	17.15
802.11ax HE160	50	5250	10.86	10.92	13.9

WLAN Conducted Power (Laptop Mode)			
WLAN 5.6GHz Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11a	100	5500	18.32
	116	5580	19.85
	120	5600	19.91
	124	5620	19.87
	132	5660	19.83
	140	5700	18.38
	144	5720	19.82
802.11n HT20	100	5500	18.42
	116	5580	19.9
	120	5600	19.83
	124	5620	19.92
	132	5660	19.82
	140	5700	18.4
	144	5720	19.85
802.11n HT40	102	5510	17.37
	110	5550	18.34
	118	5590	19.81
	126	5630	19.83
	134	5670	19.36
	142	5710	19.92
802.11ac VHT80	106	5530	18.44
	122	5610	19.94
	138	5690	19.98
802.11ac VHT160	114	5570	13.57
802.11ax HE20	100	5500	18.37
	116	5580	19.83
	120	5600	19.9
	124	5620	19.87
	132	5660	19.82
	140	5700	18.42
	144	5720	19.87
802.11ax HE40	102	5510	17.42
	110	5550	18.42
	118	5590	19.92
	126	5630	19.9
	134	5670	18.9
	142	5710	19.82
802.11ax HE80	106	5530	18.34
	122	5610	19.36
	138	5690	19.8
802.11ax HE160	114	5570	13.62

WLAN Conducted Power (Laptop Mode)			
WLAN 5.6GHz Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11a	100	5500	18.35
	116	5580	19.84
	120	5600	19.8
	124	5620	19.82
	132	5660	19.91
	140	5700	17.37
	144	5720	19.91
802.11n HT20	100	5500	18.36
	116	5580	19.85
	120	5600	19.8
	124	5620	19.88
	132	5660	19.87
	140	5700	17.33
	144	5720	19.84
802.11n HT40	102	5510	17.34
	110	5550	18.32
	118	5590	19.85
	126	5630	19.8
	134	5670	19.38
	142	5710	19.87
802.11ac VHT80	106	5530	18.47
	122	5610	19.91
	138	5690	19.96
802.11ac VHT160	114	5570	13.56
802.11ax HE20	100	5500	18.41
	116	5580	19.92
	120	5600	19.91
	124	5620	19.84
	132	5660	19.91
	140	5700	17.41
	144	5720	19.86
802.11ax HE40	102	5510	17.4
	110	5550	18.41
	118	5590	19.88
	126	5630	19.89
	134	5670	18.92
	142	5710	19.85
802.11ax HE80	106	5530	18.34
	122	5610	19.36
	138	5690	19.8
802.11ax HE160	114	5570	13.65

WLAN Conducted Power (Laptop Mode)					
WLAN 5.6GHz Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11a	100	5500			
	116	5580			
	120	5600			
	124	5620			
	132	5660			
	140	5700			
	144	5720			
802.11n HT20	100	5500	15.36	15.31	18.35
	116	5580	14.3	14.34	17.33
	120	5600	17.41	17.39	20.41
	124	5620	17.3	17.32	20.32
	132	5660	17.35	17.3	20.34
	140	5700	14.35	14.35	17.36
	144	5720	17.07	17.06	20.08
802.11n HT40	102	5510	14.4	14.31	17.37
	110	5550	15.37	15.35	18.37
	118	5590	17.4	17.33	20.38
	126	5630	16.87	16.9	19.9
	134	5670	16.87	16.9	19.9
	142	5710	17.35	17.37	20.37
802.11ac VHT80	106	5530	15.48	15.47	18.49
	122	5610	17.46	17.45	20.47
	138	5690	17.48	17.49	20.5
802.11ac VHT160	114	5570	10.56	10.59	13.59
802.11ax HE20	100	5500	15.34	15.32	18.34
	116	5580	14.32	14.35	17.35
	120	5600	17.41	17.38	20.41
	124	5620	17.3	17.35	20.34
	132	5660	17.37	17.42	20.41
	140	5700	14.34	14.33	17.35
	144	5720	17.05	17.1	20.09
802.11ax HE40	102	5510	14.41	14.39	17.41
	110	5550	15.39	15.31	18.36
	118	5590	17.3	17.4	20.36
	126	5630	16.86	16.82	19.85
	134	5670	16.84	16.9	19.88
	142	5710	17.33	17.36	20.36
802.11ax HE80	106	5530	15.37	15.33	18.36
	122	5610	17.35	17.33	20.35
	138	5690	17.34	17.33	20.35
802.11ax HE160	114	5570	10.62	10.58	13.61

WLAN Conducted Power (Laptop Mode)			
WLAN 5.8GHz Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11a	149	5745	19.9
	153	5765	19.92
	157	5785	19.8
	161	5805	19.81
	165	5825	19.8
802.11n HT20	149	5745	19.89
	153	5765	19.92
	157	5785	19.91
	161	5805	19.89
	165	5825	19.87
802.11n HT40	151	5755	19.99
	159	5795	19.93
802.11ac VHT80	155	5775	18.41
802.11ax HE20	149	5745	19.84
	153	5765	19.92
	157	5785	19.92
	161	5805	19.86
	165	5825	19.92
802.11ax HE40	151	5755	19.86
	159	5795	19.85
802.11ax HE80	155	5775	18.36

WLAN Conducted Power (Laptop Mode)			
WLAN 5.8GHz Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11a	149	5745	19.89
	153	5765	19.87
	157	5785	19.91
	161	5805	19.9
	165	5825	19.87
802.11n HT20	149	5745	19.87
	153	5765	19.92
	157	5785	19.87
	161	5805	19.85
	165	5825	19.88
802.11n HT40	151	5755	19.98
	159	5795	19.96
802.11ac VHT80	155	5775	18.9
802.11ax HE20	149	5745	19.85
	153	5765	19.89
	157	5785	19.92
	161	5805	19.9
	165	5825	19.87
802.11ax HE40	151	5755	19.88
	159	5795	19.83
802.11ax HE80	155	5775	18.85

WLAN Conducted Power (Laptop Mode)					
WLAN 5.8GHz Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11a	149	5745			
	153	5765			
	157	5785			
	161	5805			
	165	5825			
802.11n HT20	149	5745	17.13	17.1	20.13
	153	5765	17.13	17.15	20.15
	157	5785	17.11	17.11	20.12
	161	5805	17.1	17.06	20.09
	165	5825	17.11	17.12	20.13
802.11n HT40	151	5755	17.49	17.48	20.5
	159	5795	17.44	17.46	20.46
802.11ac VHT80	155	5775	15.88	15.85	18.88
802.11ax HE20	149	5745	17.1	17.14	20.13
	153	5765	17.09	17.15	20.13
	157	5785	17.13	17.15	20.15
	161	5805	17.08	17.12	20.11
	165	5825	17.12	17.1	20.12
802.11ax HE40	151	5755	17.36	17.31	20.35
	159	5795	17.37	17.32	20.36
802.11ax HE80	155	5775	15.85	15.85	18.86

WLAN Conducted Power (Tablet Mode)			
WLAN2.4GHz Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11b	1	2412	16.93
	6	2437	16.98
	11	2462	16.81
	12	2467	16.72
	13	2472	14.95
802.11g	1	2412	16.31
	6	2437	16.88
	11	2462	16.42
	12	2467	14.81
	13	2472	1.39
802.11n HT20	1	2412	16.41
	6	2437	16.88
	11	2462	15.32
	12	2467	14.91
	13	2472	1.35
802.11n HT40	3	2422	16.38
	6	2437	15.34
	9	2452	15.84
	10	2457	12.37
	11	2462	4.82
802.11ax HE20	1	2412	16.34
	6	2437	16.84
	11	2462	15.32
	12	2467	14.92
	13	2472	1.42
802.11ax HE40	3	2422	16.37
	6	2437	15.33
	9	2452	15.8
	10	2457	12.3
	11	2462	4.91

WLAN Conducted Power (Tablet Mode)			
WLAN2.4GHz Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11b	1	2412	19.13
	6	2437	19.69
	11	2462	19.19
	12	2467	18.13
	13	2472	14.68
802.11g	1	2412	16.59
	6	2437	19.56
	11	2462	16.59
	12	2467	14.5
	13	2472	1.02
802.11n HT20	1	2412	16.59
	6	2437	19.51
	11	2462	15.01
	12	2467	14.54
	13	2472	1.09
802.11n HT40	3	2422	16.06
	6	2437	15.07
	9	2452	13.99
	10	2457	12.01
	11	2462	4.53
802.11ax HE20	1	2412	16.53
	6	2437	19.54
	11	2462	15.06
	12	2467	14.59
	13	2472	1.06
802.11ax HE40	3	2422	16.09
	6	2437	15.11
	9	2452	14.52
	10	2457	12.04
	11	2462	4.65

WLAN Conducted Power (Tablet Mode)					
WLAN2.4GHz Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11b	1	2412			
	6	2437			
	11	2462			
	12	2467			
	13	2472			
802.11g	1	2412			
	6	2437			
	11	2462			
	12	2467			
	13	2472			
802.11n HT20	1	2412	13.96	13.98	16.65
	6	2437	17.48	17.46	20.14
	11	2462	14.96	14.97	17.61
	12	2467	11.96	11.98	14.63
	13	2472	-1.56	-1.58	1.17
802.11n HT40	3	2422	13.42	13.39	16.15
	6	2437	14.33	14.33	17.06
	9	2452	12.86	12.85	15.59
	10	2457	9.33	9.4	12.05
	11	2462	1.91	1.82	4.56
802.11ax HE20	1	2412	13.81	13.89	16.54
	6	2437	17.4	17.37	20.08
	11	2462	14.34	14.37	17.09
	12	2467	11.89	11.88	14.62
	13	2472	-1.61	-1.69	1.05
802.11ax HE40	3	2422	13.37	13.32	16.07
	6	2437	14.37	14.42	17.12
	9	2452	12.83	12.8	15.55
	10	2457	9.36	9.39	12.07
	11	2462	1.82	1.9	4.55

WLAN Conducted Power (Tablet Mode)			
Bluetooth Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
BR / EDR	0	2402	7.33
	39	2441	7.15
	78	2480	7.81
LE	0	2402	6.41
	19	2440	6.56
	39	2480	6.73

WLAN Conducted Power (Tablet Mode)			
WLAN 5.3GHz Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11a	52	5260	17.39
	56	5280	17.3
	60	5300	17.41
	64	5320	17.33
802.11n HT20	52	5260	17.42
	56	5280	17.34
	60	5300	17.33
	64	5320	17.32
802.11n HT40	54	5270	17.48
	62	5310	17.46
802.11ac VHT80	58	5290	17.15
802.11ac VHT160	50	5250	14.13
802.11ax HE20	52	5260	17.32
	56	5280	17.36
	60	5300	17.3
	64	5320	17.34
802.11ax HE40	54	5270	17.42
	62	5310	17.39
802.11ax HE80	58	5290	17.17
802.11ax HE160	50	5250	14.06

WLAN Conducted Power (Tablet Mode)			
WLAN 5.3GHz Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11a	52	5260	16.36
	56	5280	16.32
	60	5300	16.34
	64	5320	16.34
802.11n HT20	52	5260	16.31
	56	5280	16.32
	60	5300	16.41
	64	5320	16.37
802.11n HT40	54	5270	16.49
	62	5310	16.47
802.11ac VHT80	58	5290	16.35
802.11ac VHT160	50	5250	13.87
802.11ax HE20	52	5260	16.27
	56	5280	16.35
	60	5300	16.35
	64	5320	16.32
802.11ax HE40	54	5270	16.32
	62	5310	16.45
802.11ax HE80	58	5290	16.36
802.11ax HE160	50	5250	13.92

WLAN Conducted Power (Tablet Mode)					
WLAN 5.3GHz Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11a	52	5260			
	56	5280			
	60	5300			
	64	5320			
802.11n HT20	52	5260	16.98	16.97	19.99
	56	5280	16.96	16.94	19.96
	60	5300	15.92	15.97	18.96
	64	5320	14.98	14.92	17.96
802.11n HT40	54	5270	16.08	16.12	19.11
	62	5310	13.85	13.89	16.88
802.11ac VHT80	58	5290	14.16	14.12	17.15
802.11ac VHT160	50	5250	10.85	10.8	13.84
802.11ax HE20	52	5260	16.91	16.87	19.9
	56	5280	16.89	16.92	19.92
	60	5300	15.81	15.84	18.84
	64	5320	14.91	14.8	17.87
802.11ax HE40	54	5270	16.17	16.15	19.17
	62	5310	13.83	13.88	16.87
802.11ax HE80	58	5290	14.14	14.17	17.17
802.11ax HE160	50	5250	10.85	10.86	13.87

WLAN Conducted Power (Tablet Mode)			
WLAN 5.6GHz Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11a	100	5500	14.35
	116	5580	14.39
	120	5600	14.3
	124	5620	14.35
	132	5660	14.32
	140	5700	14.42
	144	5720	14.31
802.11n HT20	100	5500	14.42
	116	5580	14.3
	120	5600	14.32
	124	5620	14.34
	132	5660	14.42
	140	5700	14.41
	144	5720	14.3
802.11n HT40	102	5510	14.33
	110	5550	14.35
	118	5590	14.37
	126	5630	14.35
	134	5670	14.33
	142	5710	14.34
802.11ac VHT80	106	5530	14.46
	122	5610	14.45
	138	5690	14.49
802.11ac VHT160	114	5570	13.56
802.11ax HE20	100	5500	14.35
	116	5580	14.31
	120	5600	14.31
	124	5620	14.33
	132	5660	14.33
	140	5700	14.4
	144	5720	14.3
802.11ax HE40	102	5510	14.3
	110	5550	14.42
	118	5590	14.31
	126	5630	14.3
	134	5670	14.32
	142	5710	14.38
802.11ax HE80	106	5530	14.32
	122	5610	14.39
	138	5690	14.4
802.11ax HE160	114	5570	13.55

WLAN Conducted Power (Tablet Mode)			
WLAN 5.6GHz Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11a	100	5500	16.89
	116	5580	16.86
	120	5600	16.83
	124	5620	16.83
	132	5660	16.92
	140	5700	16.86
	144	5720	16.86
802.11n HT20	100	5500	16.84
	116	5580	16.9
	120	5600	16.8
	124	5620	16.85
	132	5660	16.87
	140	5700	16.85
	144	5720	16.9
802.11n HT40	102	5510	16.85
	110	5550	16.89
	118	5590	16.82
	126	5630	16.86
	134	5670	16.88
	142	5710	16.86
802.11ac VHT80	106	5530	16.96
	122	5610	16.94
	138	5690	16.98
802.11ac VHT160	114	5570	13.4
802.11ax HE20	100	5500	16.85
	116	5580	16.87
	120	5600	16.88
	124	5620	16.91
	132	5660	16.85
	140	5700	16.81
	144	5720	16.9
802.11ax HE40	102	5510	16.86
	110	5550	16.83
	118	5590	16.88
	126	5630	16.82
	134	5670	16.8
	142	5710	16.9
802.11ax HE80	106	5530	16.88
	122	5610	16.89
	138	5690	16.91
802.11ax HE160	114	5570	13.62

WLAN Conducted Power (Tablet Mode)					
WLAN 5.6GHz Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11a	100	5500			
	116	5580			
	120	5600			
	124	5620			
	132	5660			
	140	5700			
	144	5720			
802.11n HT20	100	5500	14.42	14.35	17.4
	116	5580	14.32	14.31	17.33
	120	5600	14.38	14.36	17.38
	124	5620	14.35	14.4	17.39
	132	5660	14.33	14.35	17.35
	140	5700	14.35	14.41	17.39
	144	5720	14.42	14.37	17.41
802.11n HT40	102	5510	14.34	14.42	17.39
	110	5550	14.38	14.37	17.39
	118	5590	14.42	14.4	17.42
	126	5630	14.3	14.41	17.37
	134	5670	14.42	14.38	17.41
	142	5710	14.36	14.32	17.35
802.11ac VHT80	106	5530	14.46	14.48	17.48
	122	5610	14.41	14.44	17.44
	138	5690	14.48	14.49	17.5
802.11ac VHT160	114	5570	10.51	10.49	13.51
802.11ax HE20	100	5500	14.33	14.39	17.37
	116	5580	14.39	14.37	17.39
	120	5600	14.42	14.35	17.4
	124	5620	14.31	14.38	17.36
	132	5660	14.34	14.4	17.38
	140	5700	14.4	14.3	17.36
	144	5720	14.3	14.41	17.37
802.11ax HE40	102	5510	14.42	14.33	17.39
	110	5550	14.37	14.37	17.38
	118	5590	14.38	14.34	17.37
	126	5630	14.36	14.34	17.36
	134	5670	14.3	14.34	17.33
	142	5710	14.4	14.34	17.38
802.11ax HE80	106	5530	14.38	14.31	17.36
	122	5610	14.37	14.3	17.35
	138	5690	14.42	14.41	17.43
802.11ax HE160	114	5570	10.61	10.6	13.62

WLAN Conducted Power (Tablet Mode)			
WLAN 5.8GHz Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11a	149	5745	15.38
	153	5765	15.41
	157	5785	15.38
	161	5805	15.32
	165	5825	15.3
802.11n HT20	149	5745	15.31
	153	5765	15.41
	157	5785	15.38
	161	5805	15.36
	165	5825	15.42
802.11n HT40	151	5755	15.33
	159	5795	15.42
802.11ac VHT80	155	5775	15.49
802.11ax HE20	149	5745	15.32
	153	5765	15.31
	157	5785	15.35
	161	5805	15.31
	165	5825	15.37
802.11ax HE40	151	5755	15.4
	159	5795	15.32
802.11ax HE80	155	5775	15.4

WLAN Conducted Power (Tablet Mode)			
WLAN 5.8GHz Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11a	149	5745	17.33
	153	5765	17.34
	157	5785	17.33
	161	5805	17.39
	165	5825	17.38
802.11n HT20	149	5745	17.32
	153	5765	17.37
	157	5785	17.35
	161	5805	17.32
	165	5825	17.36
802.11n HT40	151	5755	17.42
	159	5795	17.35
802.11ac VHT80	155	5775	17.48
802.11ax HE20	149	5745	17.34
	153	5765	17.35
	157	5785	17.36
	161	5805	17.33
	165	5825	17.3
802.11ax HE40	151	5755	17.38
	159	5795	17.36
802.11ax HE80	155	5775	17.35

WLAN Conducted Power (Tablet Mode)					
WLAN 5.8GHz Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11a	149	5745			
	153	5765			
	157	5785			
	161	5805			
	165	5825			
802.11n HT20	149	5745	15.3	15.35	18.34
	153	5765	15.4	15.33	18.38
	157	5785	15.3	15.36	18.34
	161	5805	15.42	15.33	18.39
	165	5825	15.32	15.42	18.38
802.11n HT40	151	5755	15.3	15.4	18.36
	159	5795	15.32	15.31	18.33
802.11ac VHT80	155	5775	15.46	15.48	18.48
802.11ax HE20	149	5745	15.41	15.34	18.39
	153	5765	15.37	15.35	18.37
	157	5785	15.42	15.38	18.41
	161	5805	15.39	15.37	18.39
	165	5825	15.41	15.38	18.41
802.11ax HE40	151	5755	15.41	15.42	18.43
	159	5795	15.39	15.34	18.38
802.11ax HE80	155	5775	15.32	15.34	18.34