



Report No.: HK08090972-1
Data Transfer Mode
PC's AC Mains "L"

Report No.:HK08090972-1

Scan Settings (1 Range)

Frequencies				Receiver Settings			
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp
150k	30M	5k	10k	PK+AV	10ms	AUTO	LN OFF


Final Measurement: x QP / + AV

Meas Time: 1 s

Subranges: 16

Acc Margin: 20dB

Transducer No.	Start	Stop	Name
2 1	9k	30M	EW0700
3	9k	30M	EW2454
12	9k	30M	EW0090

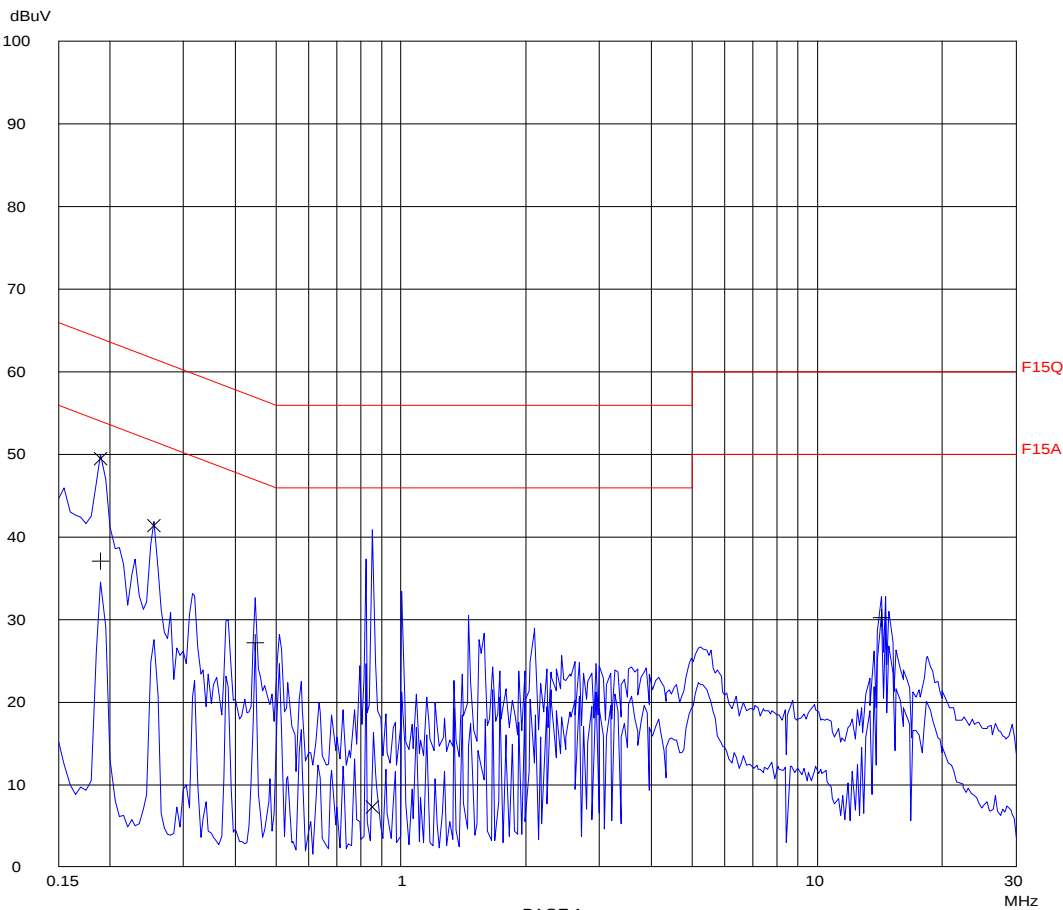



Report No.: HK08090972-1
Data Transfer Mode
PC's AC Mains "L"

Report No.:HK08090972-1

Scan Settings (1 Range)

|----- Frequencies -----||----- Receiver Settings -----|

Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150k	30M	5k	10k	PK+AV	10ms	AUTO	LN OFF	60dB

Final Measurement Results:

Frequency	QP Level	QP Limit	Delta
MHz	dBuV	dBuV	dB
0.19000	49.4	64.1	-14.7
0.25500	41.3	61.6	-20.3
0.85500	7.3	56.0	-48.7

Frequency	AV Level	AV Limit	Delta
MHz	dBuV	dBuV	dB
0.19000	37.0	54.1	-17.1
0.44500	27.2	46.9	-19.7
14.27500	30.1	50.0	-19.9

* limit exceeded

Ctrl No.: N/A