


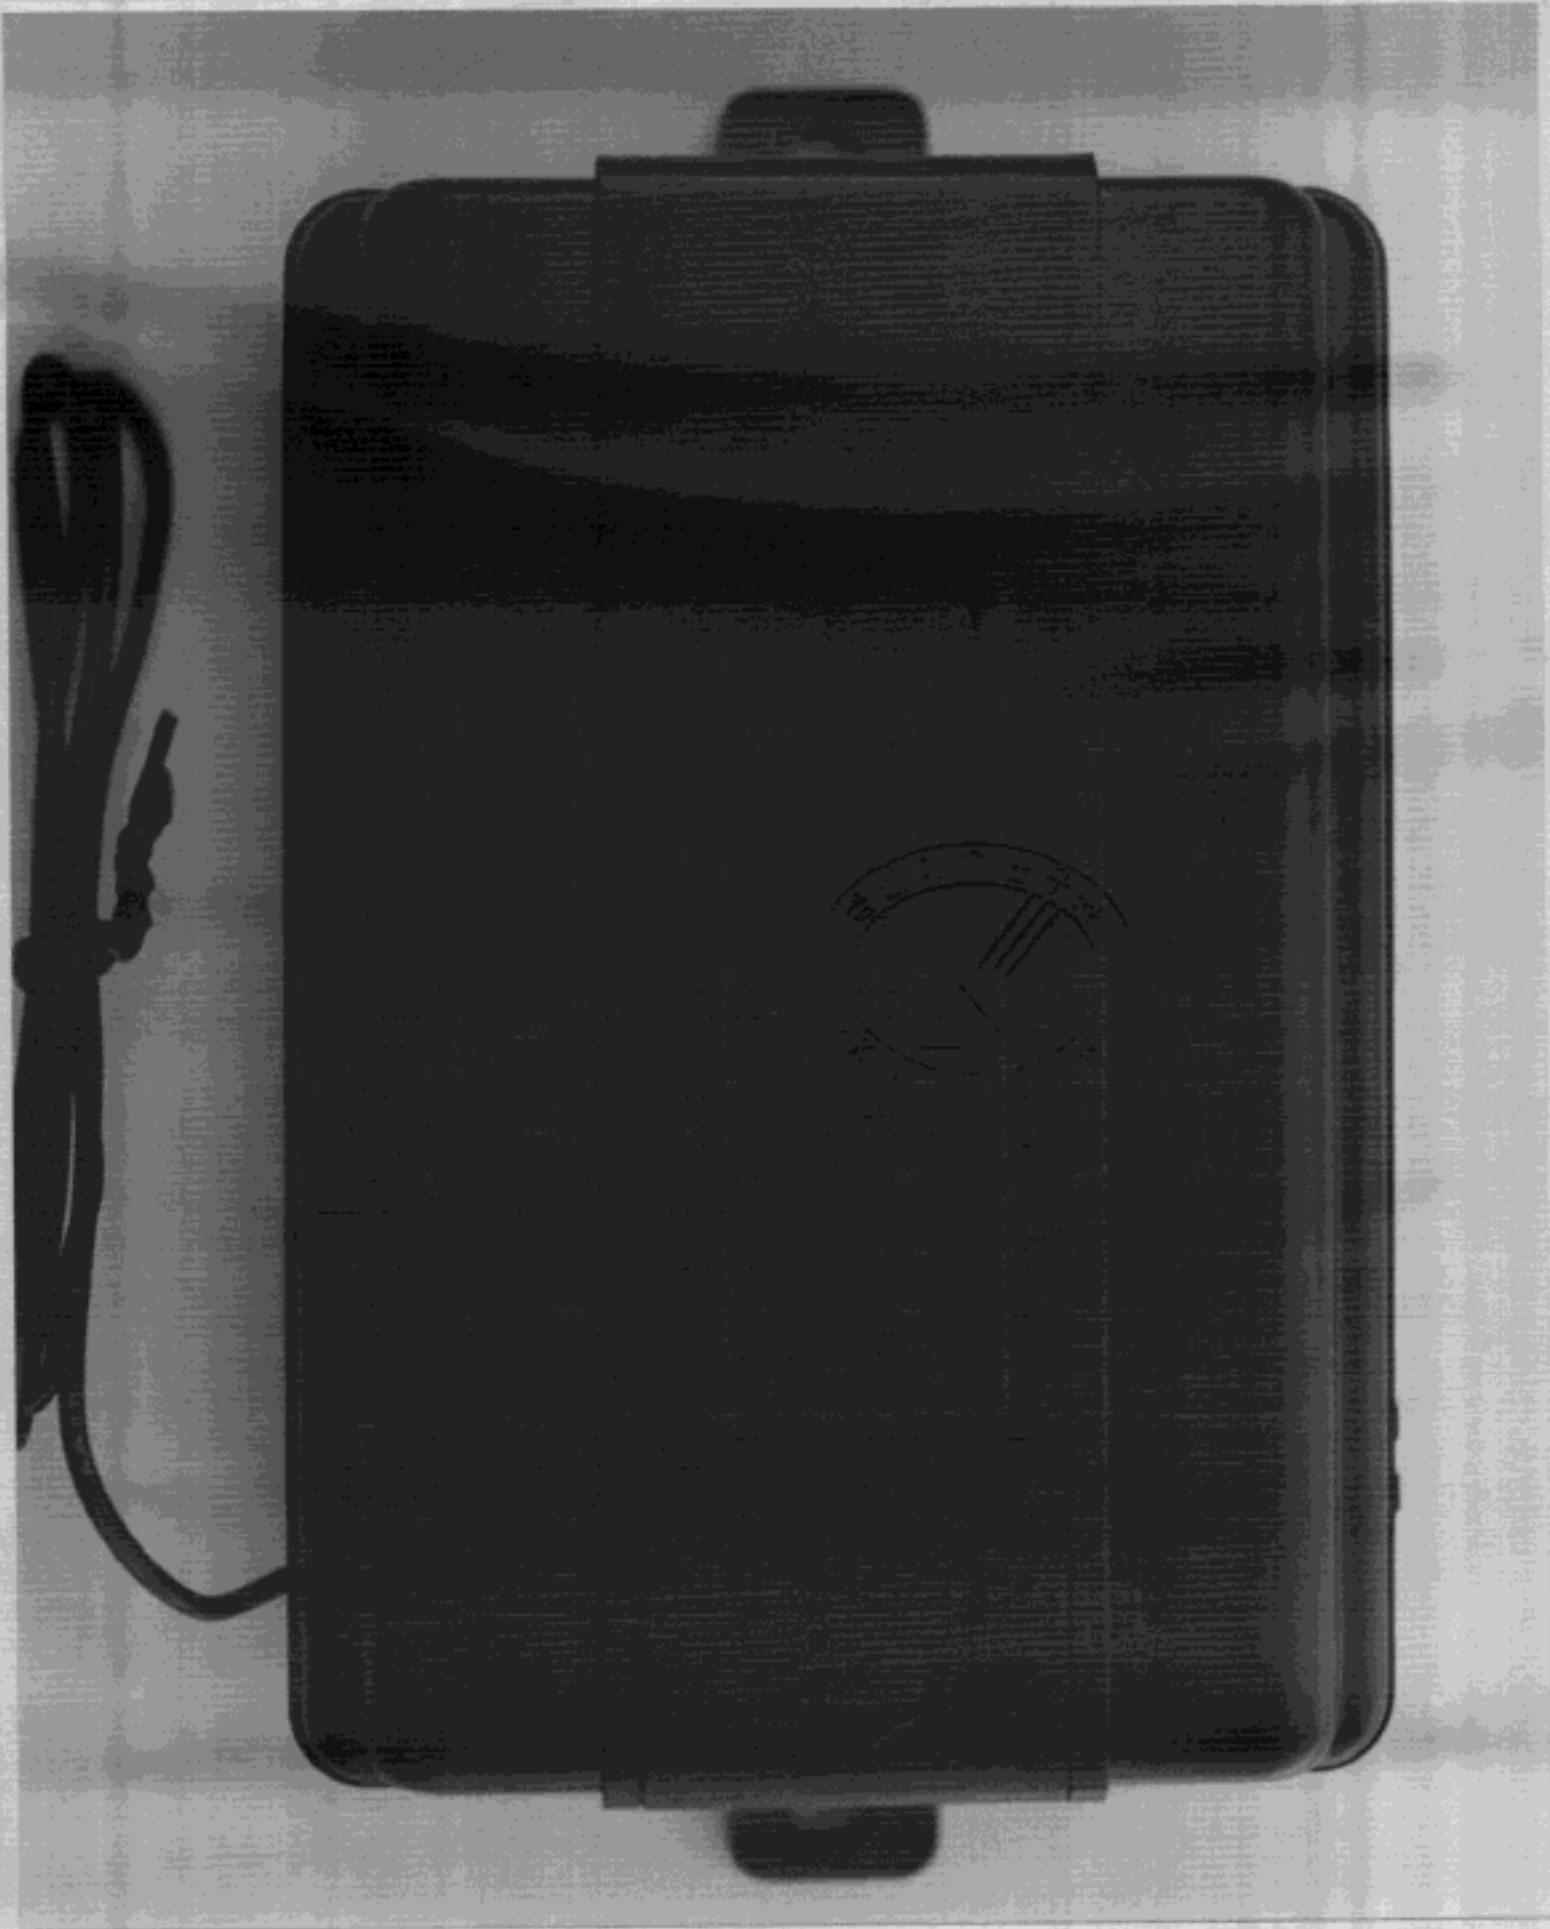

<TOP VIEW>

HARNESS INFORMATION MODEL : P 700

- RED (+) 12V DC POWER INPUT(15A)
- WHITE (+) 12V DC FLASHING LIGHT OUTPUT(10A)
- BROWN (+) 12V DC SIREN OUTPUT(1A)
- BLACK (-) GROUND
- YELLOW (+) IGNITION INPUT
- VIOLET (+) POSITIVE DOOR TRIGGER
- GREEN (-) NEGATIVE DOOR TRIGGER
- BLUE (-) NEGATIVE TRUNK/HOOD SWITCH INPUT
- ORANGE (-) STARTER KILL/GROUND
- GRAY (-) TRUNK RELEASE OUTPUT(500mA)
- BLUE (-) DOOR UNLOCK OUTPUT(500mA)
- RED (+) 12V DC OUTPUT(+500mA)
- GREEN (-) DOOR LOCK OUTPUT(500mA)

• BLACK
• BLUE
• RED
• GREEN

PLUG IN SHOCK SENSOR(DUAL STAGE)

• GRAY
• BLACK

PLUG IN VALET

• BLACK
• RED

PLUG IN LED

DIP SWITCH

NO	ON	OFF
1	Passive arming	Active arming
2	Passive door lock	Active door lock
3	Ignition door lock/unlock	
4	Door lock time: 0.8sec	3.5sec
5	Flash light on for 20sec when disarmed	

FCC ID : NTUP-700RX

This device complies with FCC Rules part 15. Operation is subject to the following two conditions:
(1) This device may not cause harmful interference and (2) This device must accept any interference that may be received, including interference that may cause undesired operation.

< BOTTOM VIEW >