

AppendixA: Effective (Isotropic) Radiated Power Output Data

Test Result(WCDMA)

Band	Type	Channel	Conducted Power (dBm)	ERP/EIRP (dBm)	ERP/EIRP Limit (dBm)	Verdict
Band2	Voice	9262	22.44	23.07	33.01	PASS
Band2	TestMode	9262	22.46	23.09	33.01	PASS
Band2	Voice	9400	22.70	23.33	33.01	PASS
Band2	TestMode	9400	22.82	23.45	33.01	PASS
Band2	Voice	9538	22.42	23.05	33.01	PASS
Band2	TestMode	9538	22.53	23.16	33.01	PASS
Band5	Voice	4132	23.14	19.92	38.45	PASS
Band5	TestMode	4132	23.12	19.9	38.45	PASS
Band5	Voice	4183	23.01	19.79	38.45	PASS
Band5	TestMode	4183	23.01	19.79	38.45	PASS
Band5	Voice	4233	23.23	20.01	38.45	PASS
Band5	TestMode	4233	23.21	19.99	38.45	PASS

Remark: EIRP (dBm) = Conducted power (dBm) + Antenna Gain (dBi). (For Band2)

ERP (dBm) = EIRP (dBm) - 2.15 (dB). (For Band5)


AppendixB:Peak-to-Average Ratio

Test Result(WCDMA)

Band	Channel	Peak-to-Average Ratio(dB)	Limit(dB)	Verdict
Band2	9400	2.96	13	PASS
Band5	4183	3.03	13	PASS

Remark: All channel had been tested, but only the worst case data displayed in this report.

Test Graphs(WCDMA)

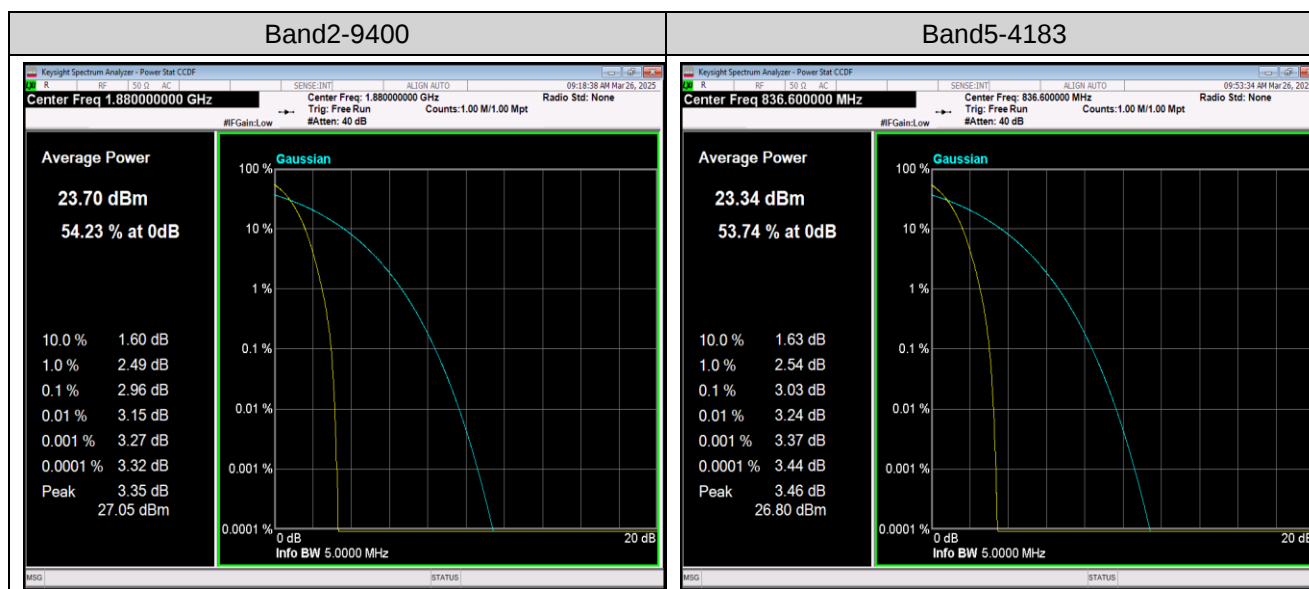


AppendixC:26dB Bandwidth andOccupied Bandwidth

Test Result(WCDMA)

Band	Channel	Occupied Bandwidth (MHz)	26dB Bandwidth (MHz)	Limit(kHz)	Verdict
Band2	9262	4.1061	4.677	---	PASS
Band2	9400	4.0993	4.672	---	PASS
Band2	9538	4.0970	4.675	---	PASS
Band5	4132	4.0938	4.665	---	PASS
Band5	4183	4.0885	4.658	---	PASS
Band5	4233	4.0959	4.685	---	PASS

Test Graphs(WCDMA)

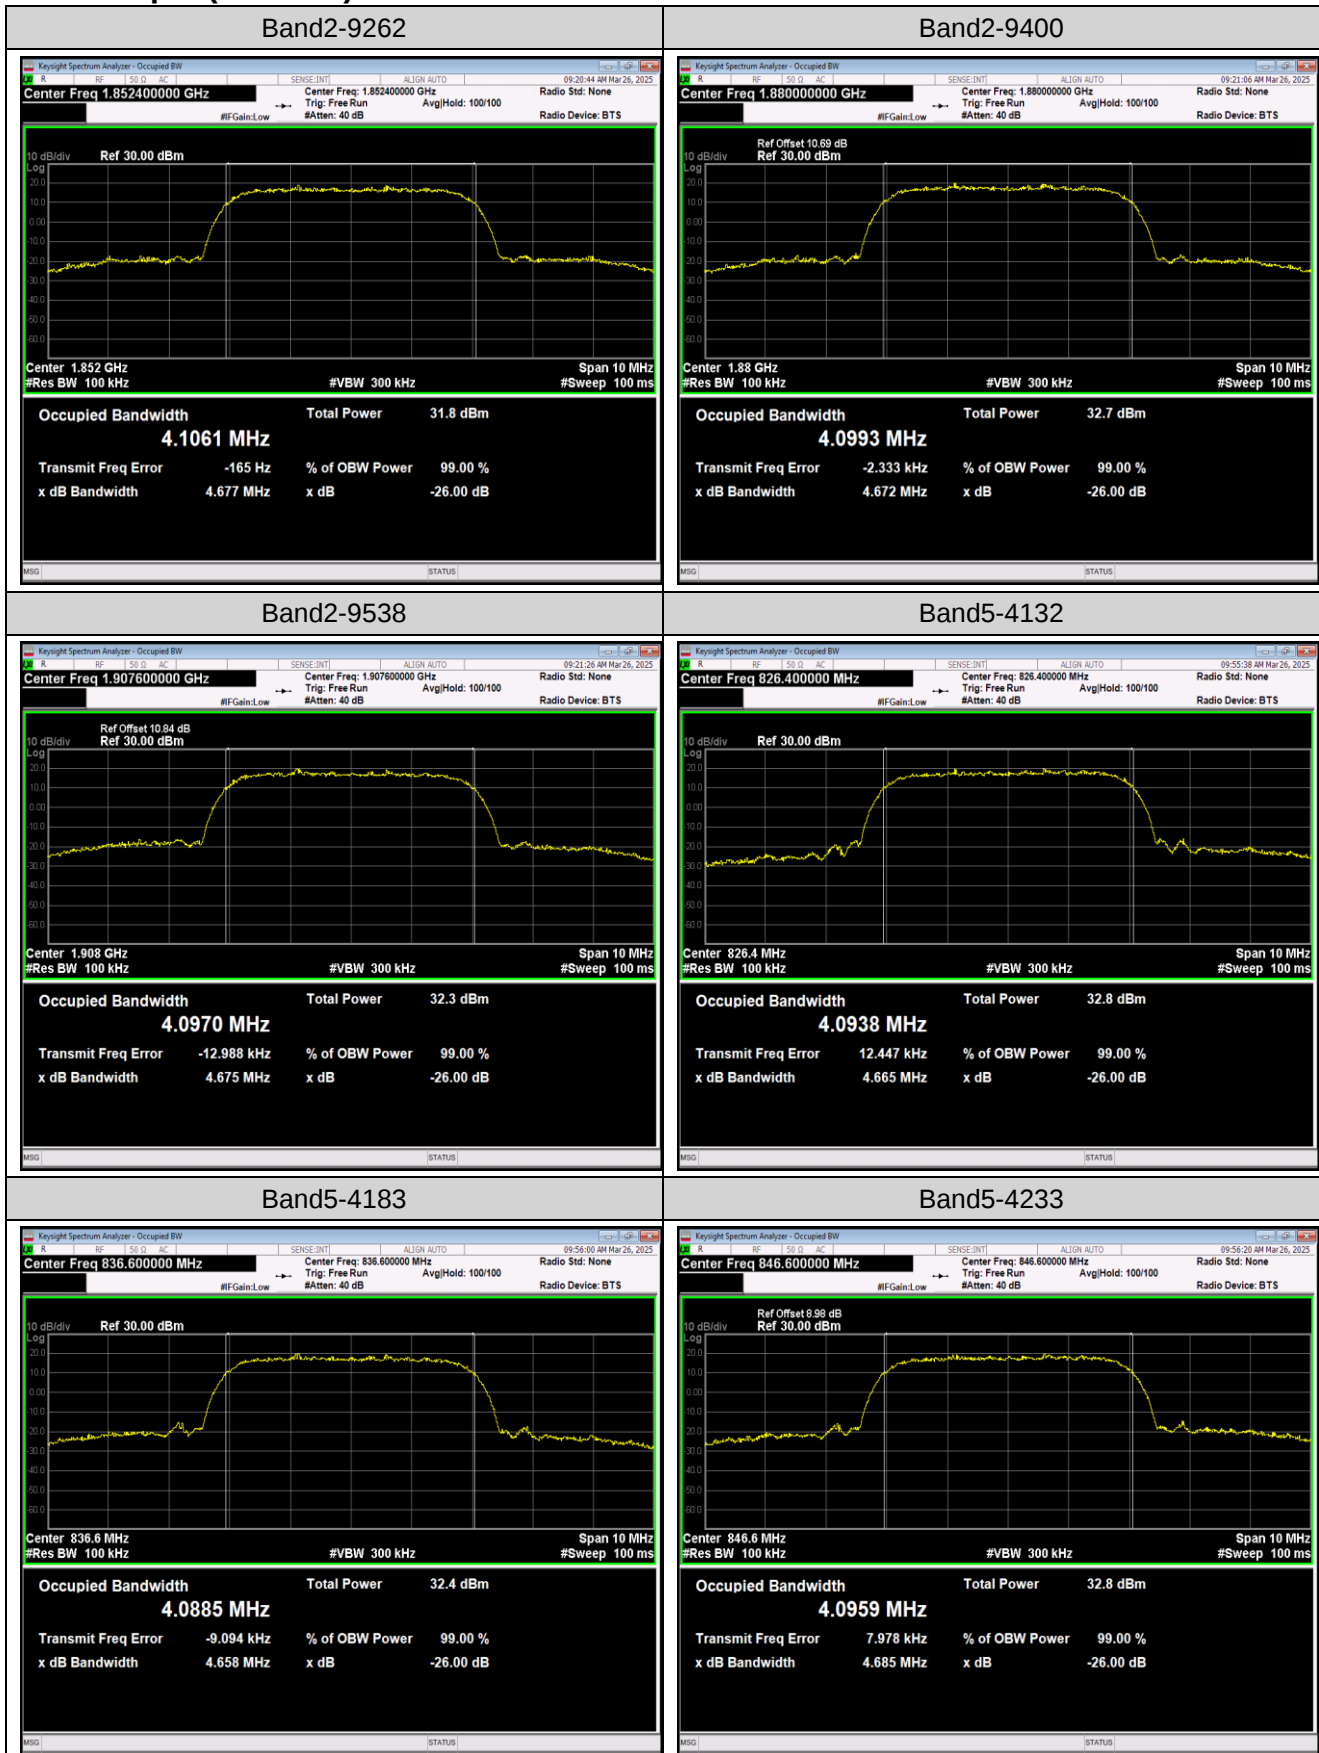


AppendixD:Band Edge

Test Result(WCDMA)

Band	Channel	Frequency (MHz)	Result (dBm)	Limit(dBm)	Verdict
Band2	9262	1850.00	-20.72	-13	PASS
Band2	9538	1910.00	-20.29	-13	PASS
Band5	4132	824.00	-21.89	-13	PASS
Band5	4233	849.00	-19.30	-13	PASS

Test Graphs(WCDMA)

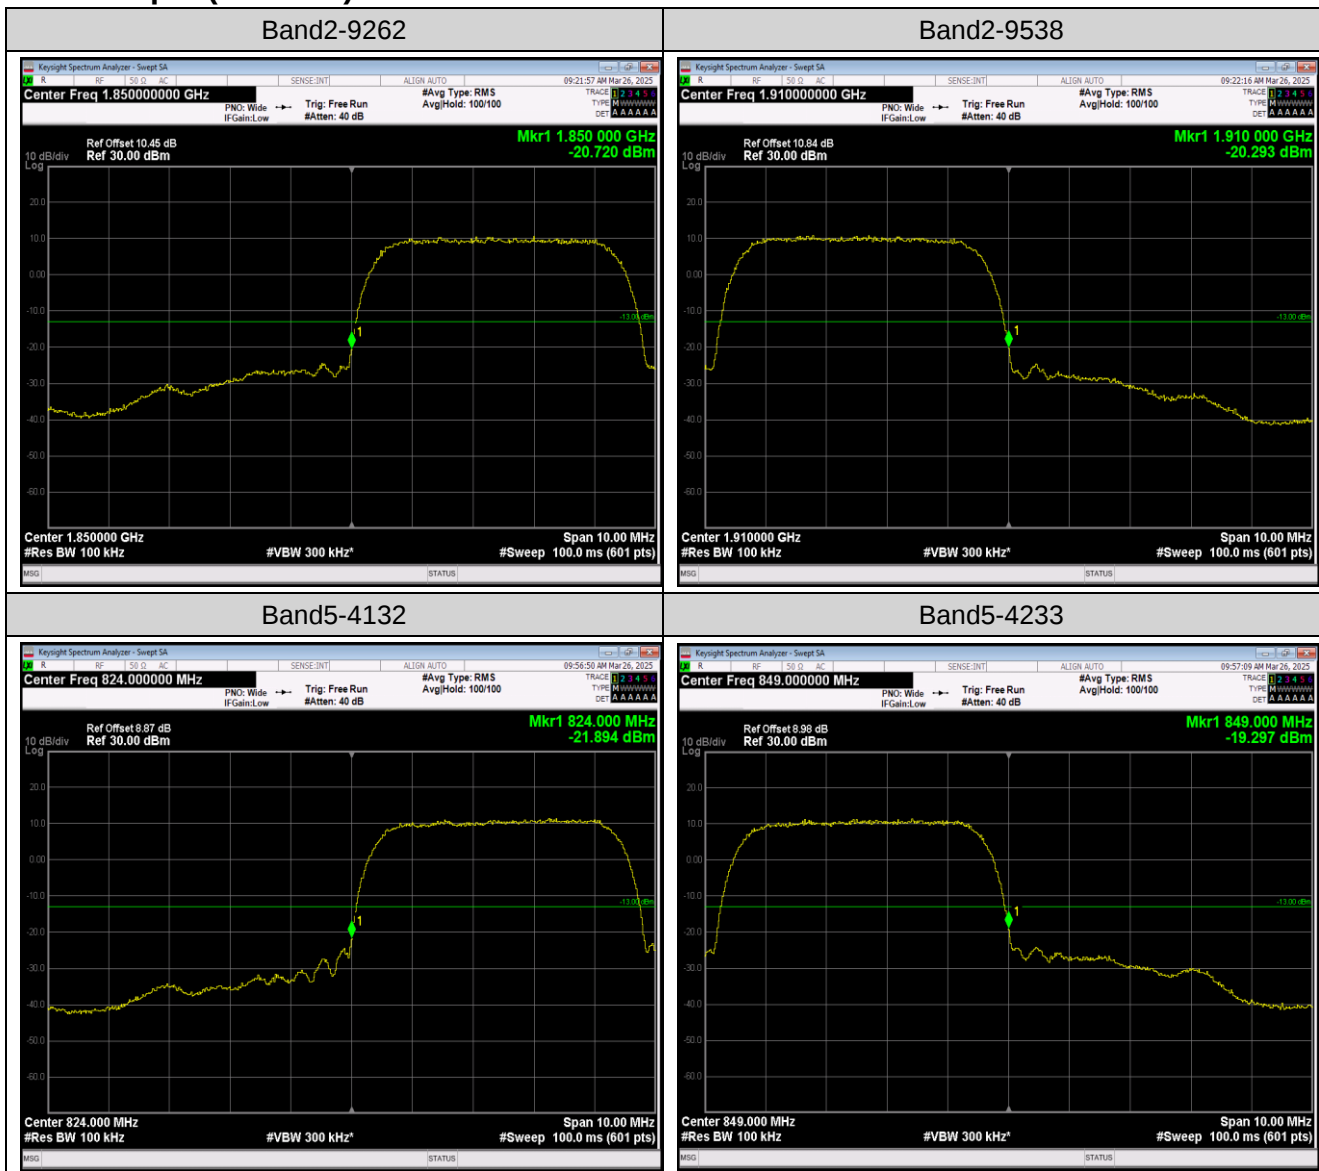



AppendixE:Conducted SpuriousEmission


Test Result(WCDMA)


Band	Channel	Frequency Range (Mhz)	Frequency (dBm)	Result (dBm)	Limit (dBm)	Verdict
Band2	9262	0.009~0.15MHz	0.01	-55.67	-43	PASS
Band2	9262	0.15~30MHz	2.6	-45.8	-23	PASS
Band2	9262	30~1000MHz	836.26	-45.43	-13	PASS
Band2	9262	1000~20000MHz	19954.4	-30.31	-13	PASS
Band2	9400	0.009~0.15MHz	0.01	-55.56	-43	PASS
Band2	9400	0.15~30MHz	0.15	-45.4	-23	PASS
Band2	9400	30~1000MHz	975.36	-44.58	-13	PASS
Band2	9400	1000~20000MHz	19974.03	-30.41	-13	PASS
Band2	9538	0.009~0.15MHz	0.01	-54.48	-43	PASS
Band2	9538	0.15~30MHz	2.61	-46.72	-23	PASS
Band2	9538	30~1000MHz	676.93	-46.48	-13	PASS
Band2	9538	1000~20000MHz	19986.7	-30.7	-13	PASS
Band5	4132	0.009~0.15MHz	0.01	-55.17	-33	PASS
Band5	4132	0.15~30MHz	0.15	-45.9	-13	PASS
Band5	4132	30~1000MHz	475.91	-55.04	-13	PASS
Band5	4132	1000~10000MHz	7079.5	-37.17	-13	PASS
Band5	4183	0.009~0.15MHz	0.01	-55.56	-33	PASS
Band5	4183	0.15~30MHz	2.56	-45.65	-13	PASS
Band5	4183	30~1000MHz	706.03	-54.9	-13	PASS
Band5	4183	1000~10000MHz	5281	-37.4	-13	PASS
Band5	4233	0.009~0.15MHz	0.01	-56.12	-33	PASS
Band5	4233	0.15~30MHz	0.15	-45.58	-13	PASS
Band5	4233	30~1000MHz	956.61	-54.59	-13	PASS
Band5	4233	1000~10000MHz	5900.2	-36.94	-13	PASS

Test Graphs(WCDMA)

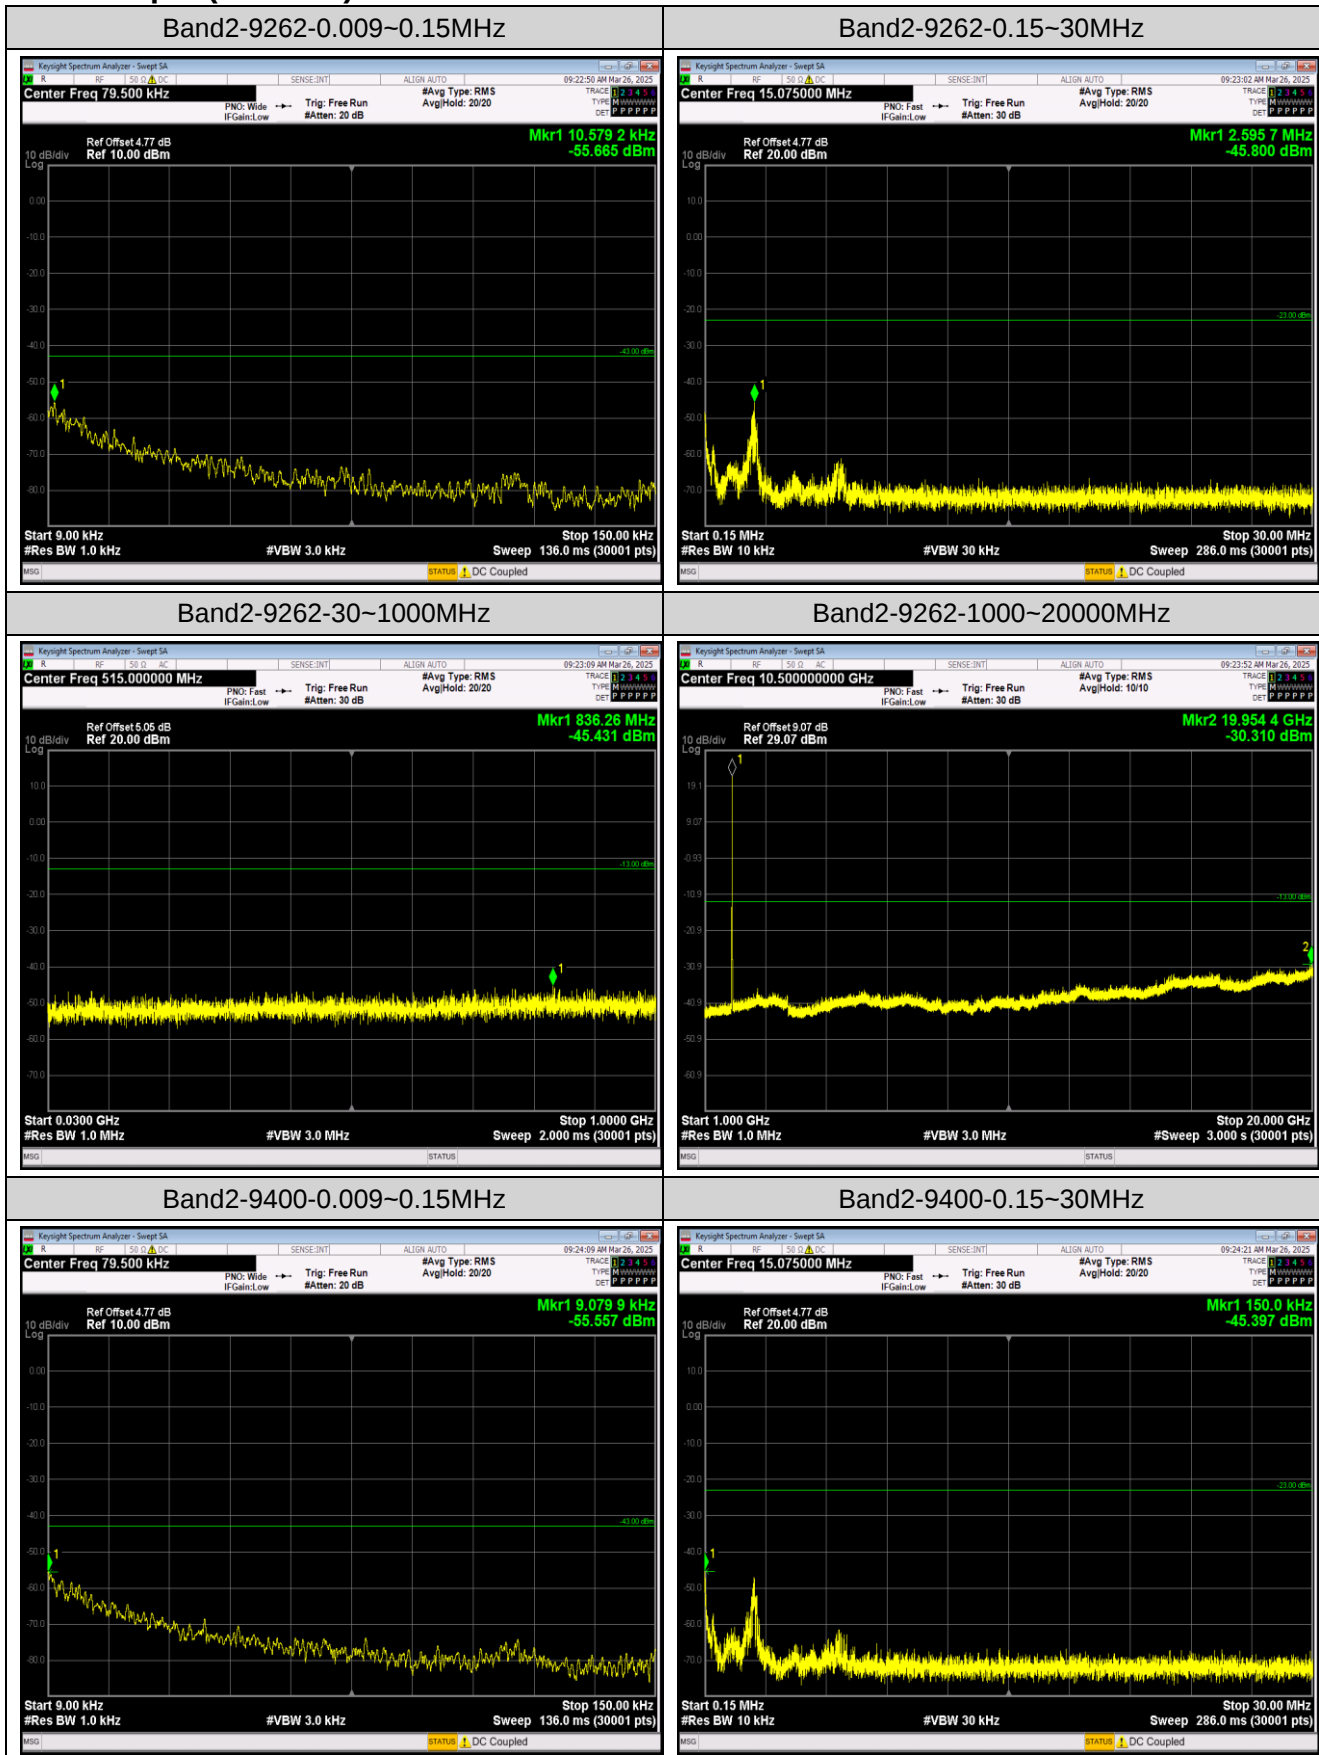

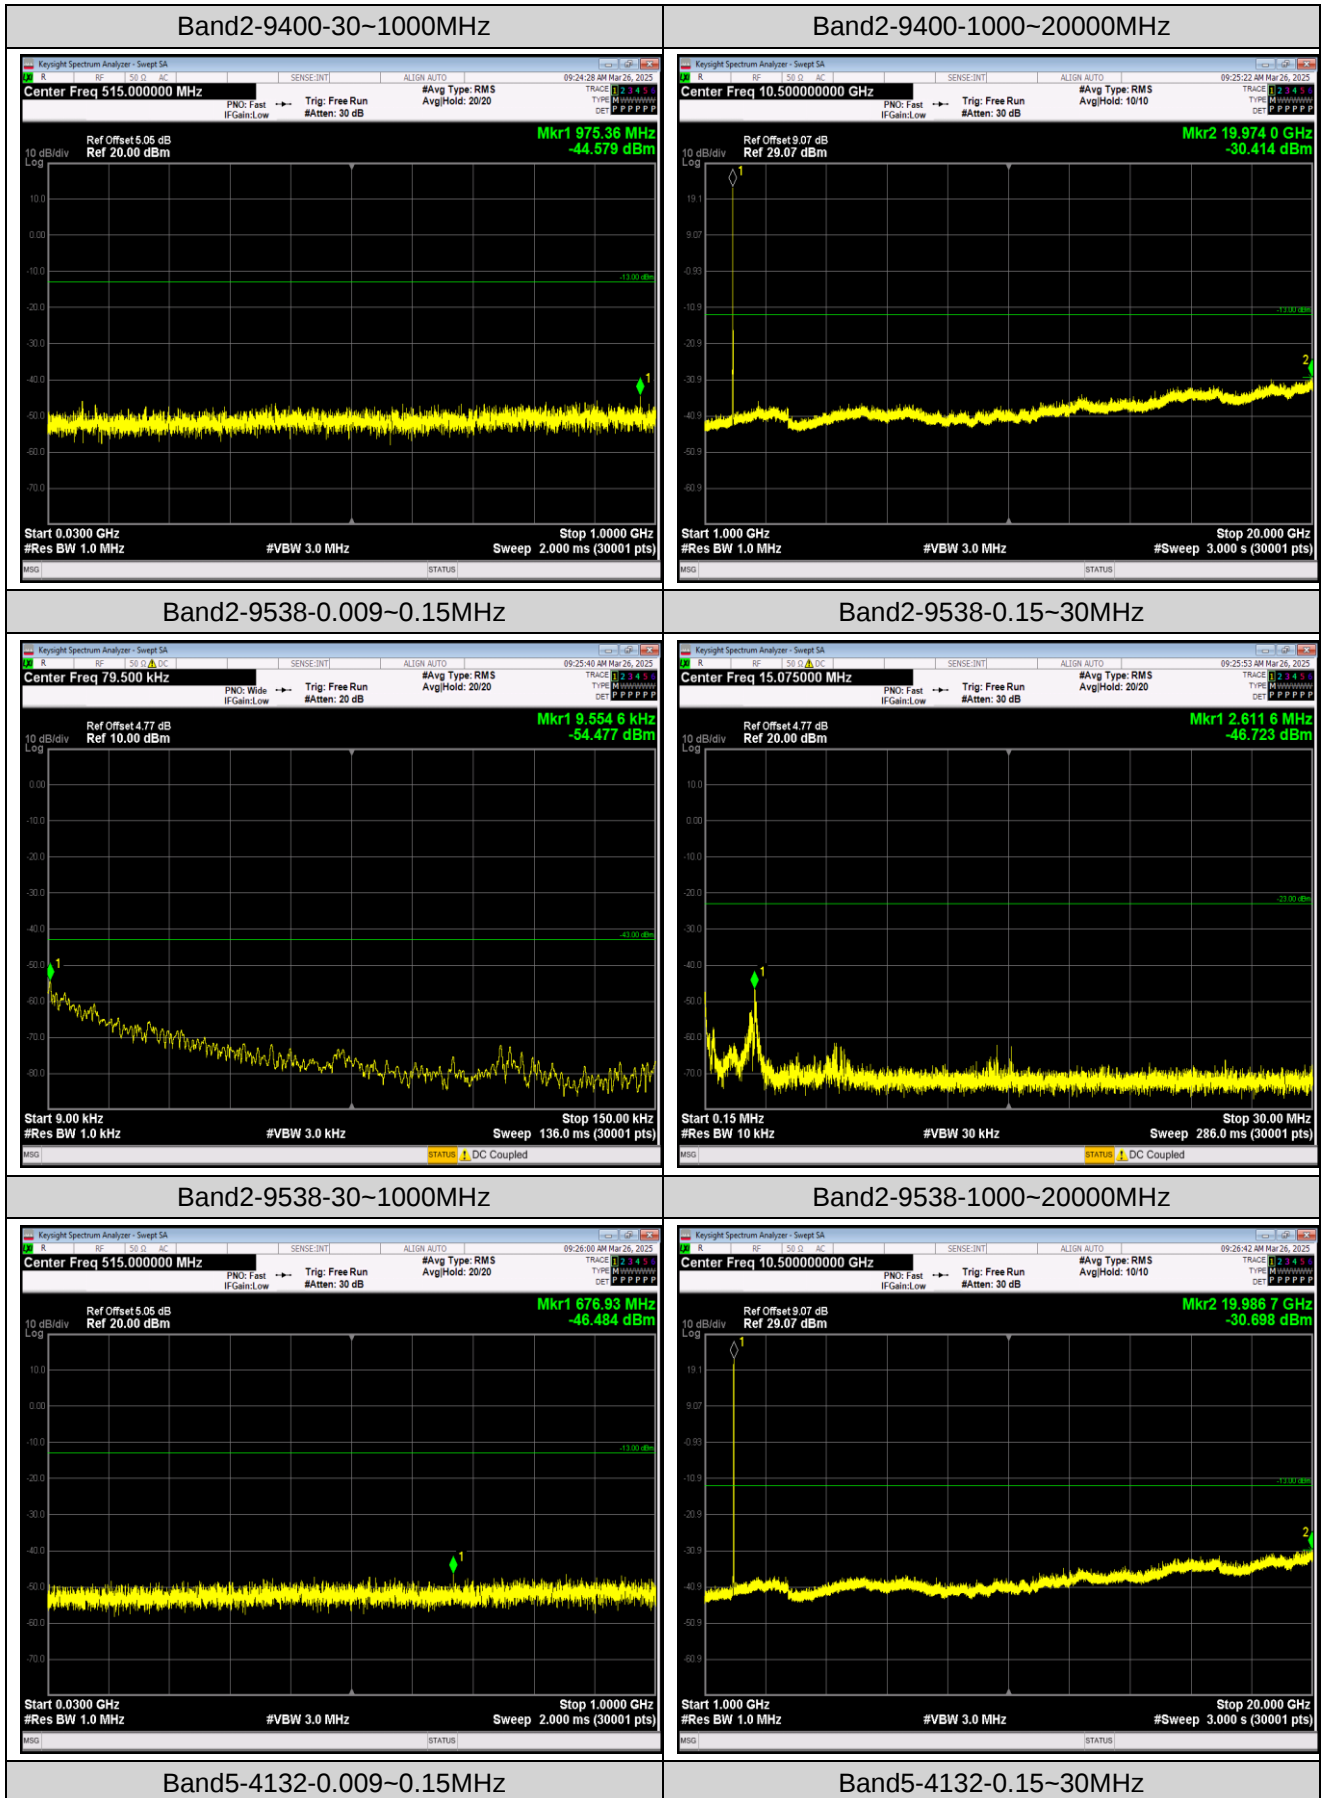

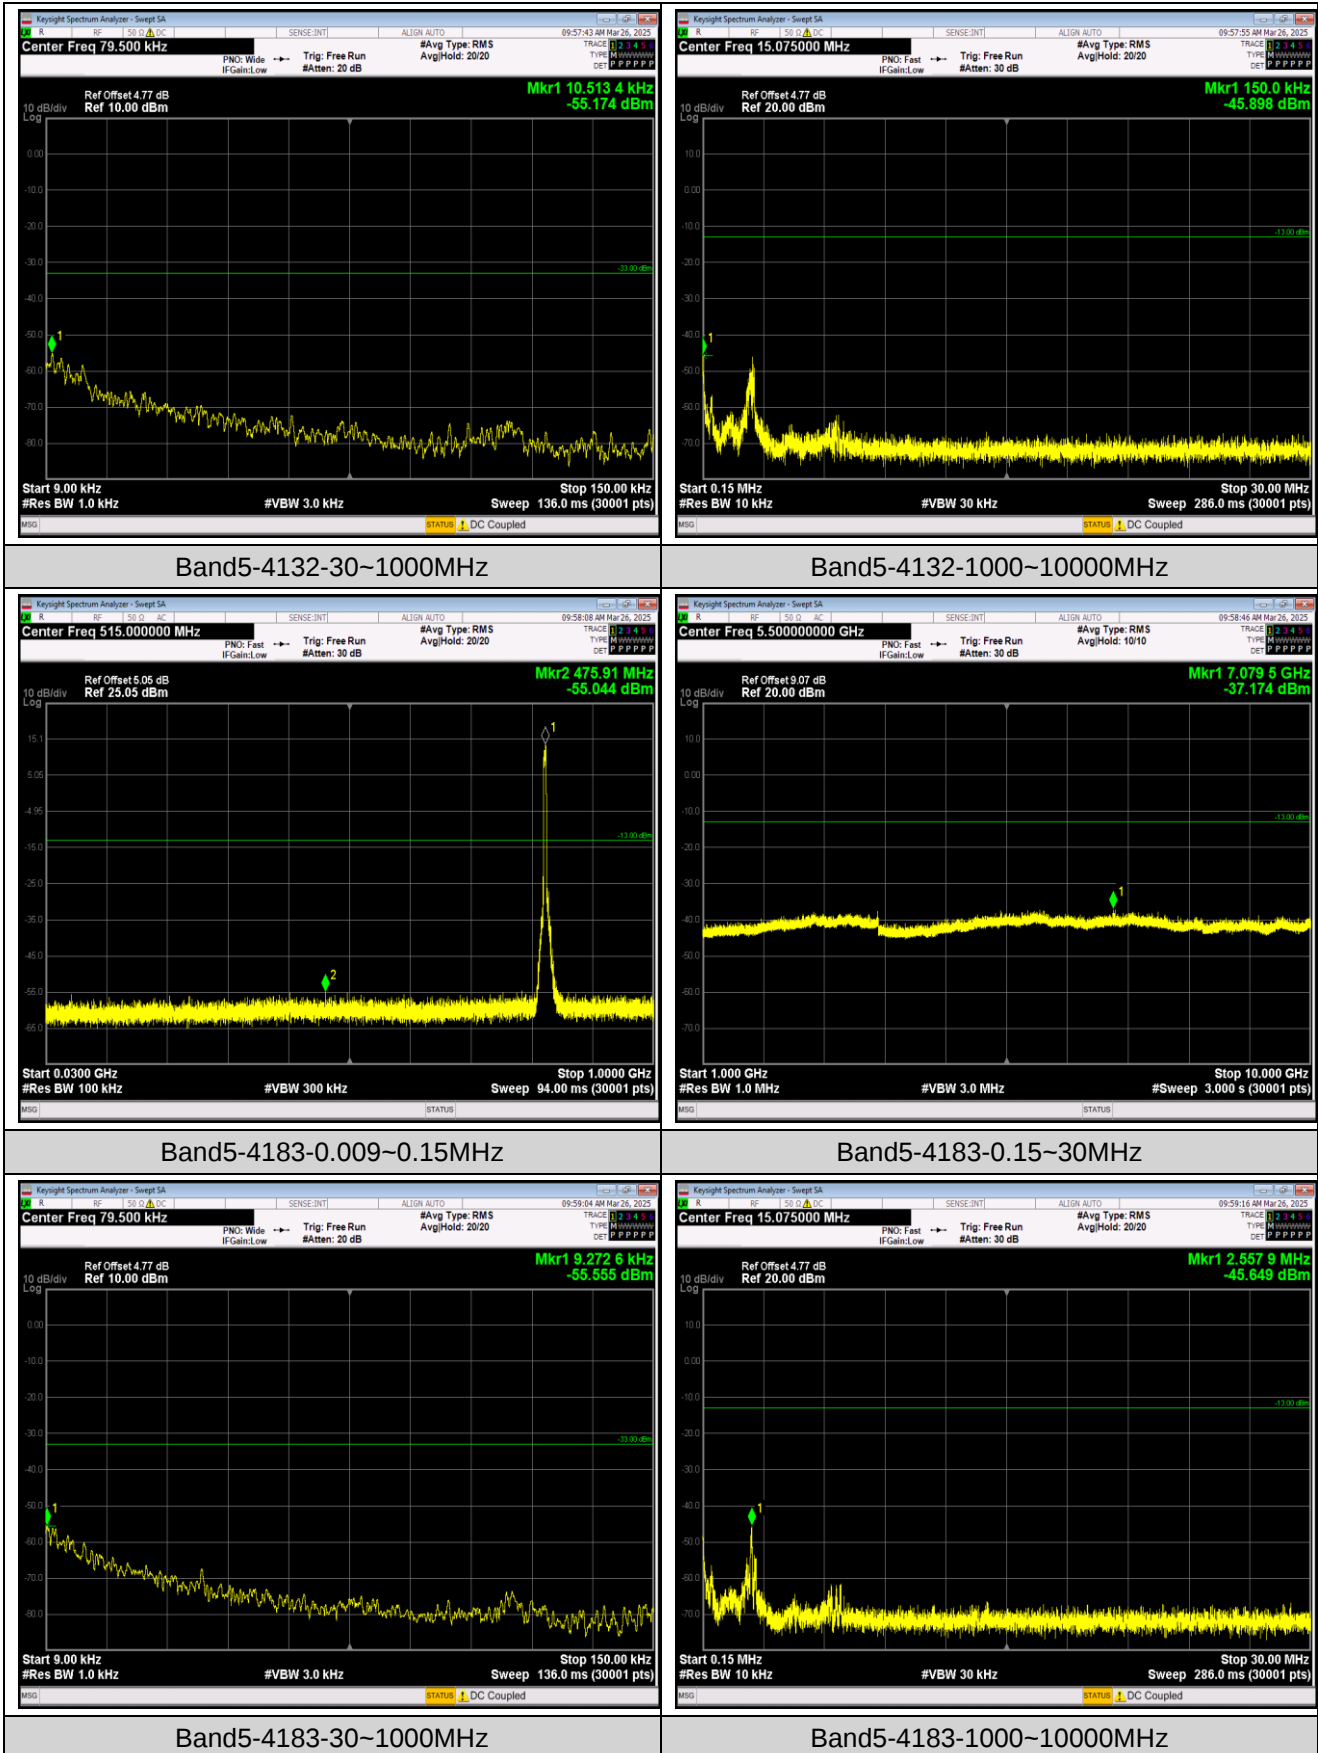

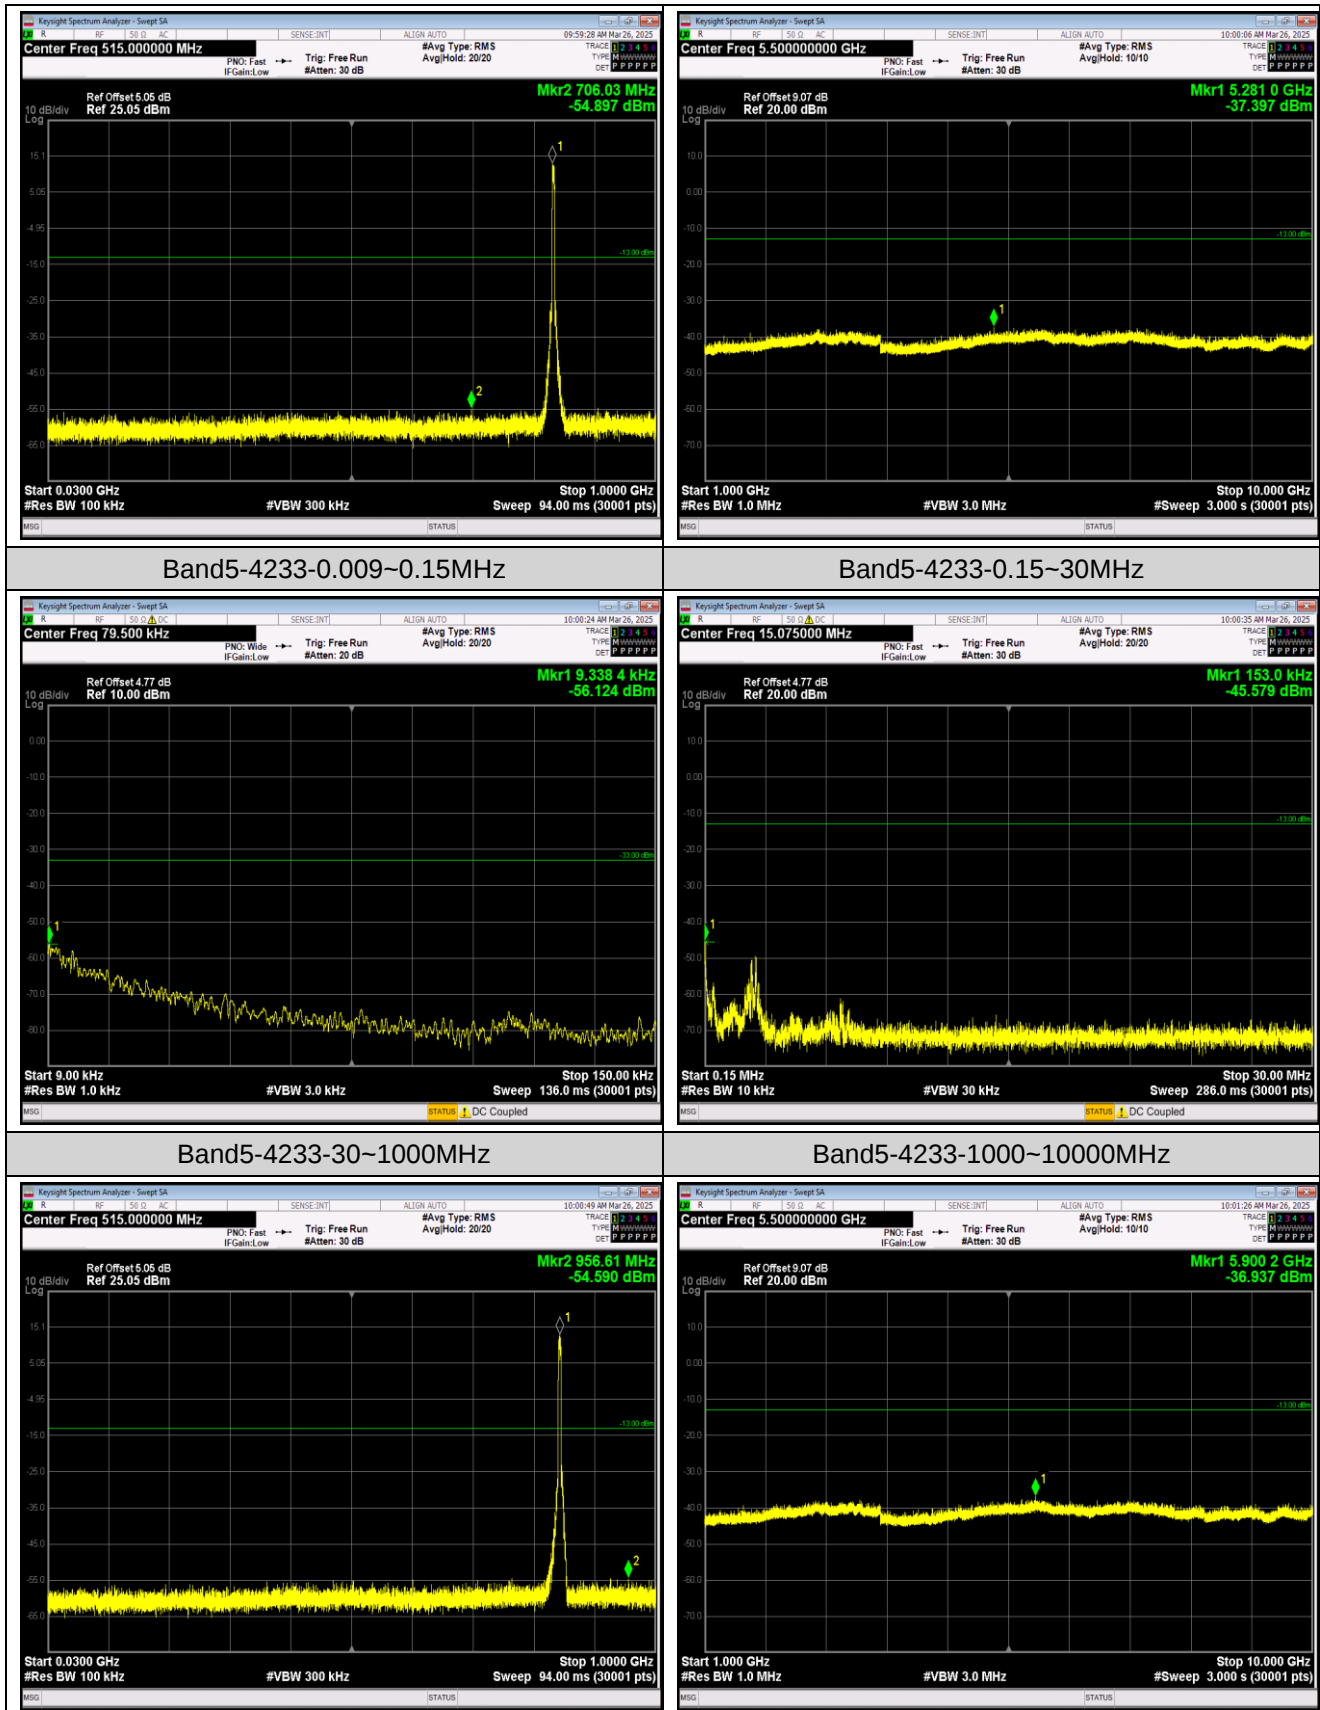

AppendixF:Frequency Stability

Test Result

Reference Frequency: WCDMA BAND V 12.2k RMC Middle channel=4183 Frequency=836.6MHz					
Temperature					
Power supplied (Vdc)	Temperature (℃)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
3.70	-30	2.55	0.003048	±2.5	Pass
	-20	1.57	0.001877		
	-10	2.04	0.002438		
	0	1.65	0.001972		
	10	1.52	0.001817		
	20	0.74	0.000885		
	30	2.14	0.002558		
	40	1.74	0.002080		
	50	1.57	0.001877		
Voltage					
Temperature (℃)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	3.30	1.34	0.001602	±2.5	Pass
	3.70	1.73	0.002068		
	4.25	2.45	0.002929		
Remark: All channel had been tested, but only the worst case data displayed in this report.					

Reference Frequency: WCDMA BAND II 12.2k RMC Middle Frequency=9400 channel=1880MHz					
Temperature					
Power supplied (Vdc)	Temperature (℃)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
3.70	-30	4.91	0.002612	Within authorized band for BAND II	Pass
	-20	6.62	0.003521		
	-10	5.06	0.002691		
	0	3.19	0.001697		
	10	6.07	0.003229		
	20	5.87	0.003122		
	30	3.31	0.001761		
	40	5.64	0.003000		
	50	4.04	0.002149		
Voltage					
Temperature (℃)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	3.30	3.52	0.001872	Within authorized band for BAND II	Pass
	3.70	3.61	0.001920		
	4.25	2.17	0.001154		
Remark: All channel had been tested, but only the worst case data displayed in this report.					

Appendix G: Modulation Characteristics

Test Result

Band	Channel	Result	Verdict
Band2	9400	PASS	PASS
Band5	4183	PASS	PASS

Remark: All channel had been tested, but only the worst case data displayed in this report.

Test Graphs

