



Mode	7																																																																																									
	Band Edge																																																																																									
	2400-2483.5_802.11ax HE20_CH01_Full RU_2412MHz																																																																																									
ANT	1																																																																																									
Pol.	Horizontal						Fundamental																																																																																			
Peak	Level (dBuV/m) Date: 2025-06-19 Site : 03CH22-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2389.95</td><td>61.30</td><td>74.00</td><td>-12.70</td><td>49.79</td><td>26.60</td><td>8.06</td><td>32.59</td><td>9.44</td><td>139</td><td>162</td><td>Peak</td></tr></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2389.95	61.30	74.00	-12.70	49.79	26.60	8.06	32.59	9.44	139	162	Peak	Level (dBuV/m) Date: 2025-06-19 Site : 03CH22-HY Condition: PEAK_74 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2412.00</td><td>109.20</td><td>-----</td><td>-----</td><td>97.47</td><td>26.80</td><td>8.10</td><td>32.61</td><td>9.44</td><td>139</td><td>162</td><td>Peak</td></tr></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2412.00	109.20	-----	-----	97.47	26.80	8.10	32.61	9.44	139	162	Peak
		Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																															
1	2389.95	61.30	74.00	-12.70	49.79	26.60	8.06	32.59	9.44	139	162	Peak																																																																														
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																															
1	2412.00	109.20	-----	-----	97.47	26.80	8.10	32.61	9.44	139	162	Peak																																																																														
Avg	Level (dBuV/m) Date: 2025-06-19 Site : 03CH22-HY Condition: AVG_BE_54 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL : RBW:1000.000kHz VBW:1.200kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2389.82</td><td>50.94</td><td>54.00</td><td>-3.06</td><td>39.43</td><td>26.60</td><td>8.06</td><td>32.59</td><td>9.44</td><td>139</td><td>162</td><td>Average</td></tr></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2389.82	50.94	54.00	-3.06	39.43	26.60	8.06	32.59	9.44	139	162	Average	Level (dBuV/m) Date: 2025-06-19 Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL : RBW:1000.000kHz VBW:1.200kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2412.00</td><td>97.39</td><td>-----</td><td>-----</td><td>85.73</td><td>26.74</td><td>8.08</td><td>32.60</td><td>9.44</td><td>139</td><td>162</td><td>Average</td></tr></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2412.00	97.39	-----	-----	85.73	26.74	8.08	32.60	9.44	139	162	Average
		Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																															
1	2389.82	50.94	54.00	-3.06	39.43	26.60	8.06	32.59	9.44	139	162	Average																																																																														
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																															
1	2412.00	97.39	-----	-----	85.73	26.74	8.08	32.60	9.44	139	162	Average																																																																														



Mode	7																																																																																																			
	Band Edge																																																																																																			
	2400-2483.5_802.11ax HE20_CH01_Full RU_2412MHz																																																																																																			
ANT	1																																																																																																			
Pol.	Vertical						Fundamental																																																																																													
Peak	Date: 2025-06-19 Site : 03CH22-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C04A18EN_250520 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.95</td><td>57.99</td><td>74.00</td><td>-16.01</td><td>46.48</td><td>26.60</td><td>8.06</td><td>32.59</td><td>9.44</td><td>166</td><td>186</td><td>Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	57.99	74.00	-16.01	46.48	26.60	8.06	32.59	9.44	166	186	Peak	Date: 2025-06-19 Site : 03CH22-HY Condition: PEAK_74 3m DRH18-E_LE2C04A18EN_250520 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2412.00</td><td>106.01</td><td>-----</td><td>-----</td><td>94.28</td><td>26.80</td><td>8.10</td><td>32.61</td><td>9.44</td><td>166</td><td>186</td><td>Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	106.01	-----	-----	94.28	26.80	8.10	32.61	9.44	166	186	Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2389.95	57.99	74.00	-16.01	46.48	26.60	8.06	32.59	9.44	166	186	Peak																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2412.00	106.01	-----	-----	94.28	26.80	8.10	32.61	9.44	166	186	Peak																																																																																								
Avg	Date: 2025-06-19 Site : 03CH22-HY Condition: AVG_BE_54 3m DRH18-E_LE2C04A18EN_250520 VERTICAL : RBW:1000.000kHz VBW:1.200kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.56</td><td>48.18</td><td>54.00</td><td>-5.82</td><td>36.67</td><td>26.60</td><td>8.06</td><td>32.59</td><td>9.44</td><td>166</td><td>186</td><td>Average</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.56	48.18	54.00	-5.82	36.67	26.60	8.06	32.59	9.44	166	186	Average	Date: 2025-06-19 Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_250520 VERTICAL : RBW:1000.000kHz VBW:1.200kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2412.00</td><td>94.60</td><td>-----</td><td>-----</td><td>82.94</td><td>26.74</td><td>8.08</td><td>32.60</td><td>9.44</td><td>166</td><td>186</td><td>Average</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	94.60	-----	-----	82.94	26.74	8.08	32.60	9.44	166	186	Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2389.56	48.18	54.00	-5.82	36.67	26.60	8.06	32.59	9.44	166	186	Average																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2412.00	94.60	-----	-----	82.94	26.74	8.08	32.60	9.44	166	186	Average																																																																																								



Mode	7																																																																																																																																																																																																																																													
	Harmonic																																																																																																																																																																																																																																													
	2400-2483.5_802.11ax HE20_CH01_Full RU_2412MHz																																																																																																																																																																																																																																													
ANT	1																																																																																																																																																																																																																																													
Pol.	Horizontal							Vertical																																																																																																																																																																																																																																						
Peak Avg	Level (dBuV/m) Date: 2025-06-19 Site : 03CH22-HY Condition: PEAK_74 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2164.00</td><td>52.63</td><td>74.00</td><td>-21.37</td><td></td><td>41.54</td><td>26.40</td><td>7.71</td><td>32.44</td><td>9.42</td><td>112</td><td>169</td><td>Peak</td></tr><tr><td>2</td><td>2164.00</td><td>40.72</td><td>54.00</td><td>-13.28</td><td></td><td>29.63</td><td>26.40</td><td>7.71</td><td>32.44</td><td>9.42</td><td>112</td><td>169</td><td>Average</td></tr><tr><td>3</td><td>2651.00</td><td>55.03</td><td>74.00</td><td>-18.97</td><td></td><td>42.39</td><td>27.49</td><td>8.34</td><td>32.68</td><td>9.49</td><td>137</td><td>171</td><td>Peak</td></tr><tr><td>4</td><td>2651.00</td><td>47.96</td><td>54.00</td><td>-6.04</td><td></td><td>35.32</td><td>27.49</td><td>8.34</td><td>32.68</td><td>9.49</td><td>137</td><td>171</td><td>Average</td></tr><tr><td>5</td><td>4824.00</td><td>50.73</td><td>74.00</td><td>-23.27</td><td></td><td>39.30</td><td>32.20</td><td>11.53</td><td>33.67</td><td>1.37</td><td>100</td><td>145</td><td>Peak</td></tr><tr><td>6</td><td>4824.00</td><td>46.49</td><td>54.00</td><td>-7.51</td><td></td><td>35.06</td><td>32.20</td><td>11.53</td><td>33.67</td><td>1.37</td><td>100</td><td>145</td><td>Average</td></tr></table>								Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2164.00	52.63	74.00	-21.37		41.54	26.40	7.71	32.44	9.42	112	169	Peak	2	2164.00	40.72	54.00	-13.28		29.63	26.40	7.71	32.44	9.42	112	169	Average	3	2651.00	55.03	74.00	-18.97		42.39	27.49	8.34	32.68	9.49	137	171	Peak	4	2651.00	47.96	54.00	-6.04		35.32	27.49	8.34	32.68	9.49	137	171	Average	5	4824.00	50.73	74.00	-23.27		39.30	32.20	11.53	33.67	1.37	100	145	Peak	6	4824.00	46.49	54.00	-7.51		35.06	32.20	11.53	33.67	1.37	100	145	Average	Level (dBuV/m) Date: 2025-06-19 Site : 03CH22-HY Condition: PEAK_74 3m DRH18-E_LE2C04A18EN_250520 VERTICAL <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2166.00</td><td>49.47</td><td>74.00</td><td>-24.53</td><td></td><td>38.38</td><td>26.40</td><td>7.71</td><td>32.44</td><td>9.42</td><td>140</td><td>156</td><td>Peak</td></tr><tr><td>2</td><td>2166.00</td><td>38.76</td><td>54.00</td><td>-15.24</td><td></td><td>27.67</td><td>26.40</td><td>7.71</td><td>32.44</td><td>9.42</td><td>140</td><td>156</td><td>Average</td></tr><tr><td>3</td><td>2646.00</td><td>53.71</td><td>74.00</td><td>-20.29</td><td></td><td>41.06</td><td>27.50</td><td>8.34</td><td>32.68</td><td>9.49</td><td>307</td><td>109</td><td>Peak</td></tr><tr><td>4</td><td>2646.00</td><td>46.88</td><td>54.00</td><td>-7.12</td><td></td><td>34.23</td><td>27.50</td><td>8.34</td><td>32.68</td><td>9.49</td><td>307</td><td>109</td><td>Average</td></tr><tr><td>5</td><td>4824.00</td><td>51.15</td><td>74.00</td><td>-22.85</td><td></td><td>39.72</td><td>32.20</td><td>11.53</td><td>33.67</td><td>1.37</td><td>300</td><td>193</td><td>Peak</td></tr><tr><td>6</td><td>4824.00</td><td>45.61</td><td>54.00</td><td>-8.39</td><td></td><td>34.18</td><td>32.20</td><td>11.53</td><td>33.67</td><td>1.37</td><td>300</td><td>193</td><td>Average</td></tr></table>								Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2166.00	49.47	74.00	-24.53		38.38	26.40	7.71	32.44	9.42	140	156	Peak	2	2166.00	38.76	54.00	-15.24		27.67	26.40	7.71	32.44	9.42	140	156	Average	3	2646.00	53.71	74.00	-20.29		41.06	27.50	8.34	32.68	9.49	307	109	Peak	4	2646.00	46.88	54.00	-7.12		34.23	27.50	8.34	32.68	9.49	307	109	Average	5	4824.00	51.15	74.00	-22.85		39.72	32.20	11.53	33.67	1.37	300	193	Peak	6	4824.00	45.61	54.00	-8.39		34.18	32.20	11.53	33.67	1.37	300	193	Average
		Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																																																
		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																																																																																	
1	2164.00	52.63	74.00	-21.37		41.54	26.40	7.71	32.44	9.42	112	169	Peak																																																																																																																																																																																																																																	
2	2164.00	40.72	54.00	-13.28		29.63	26.40	7.71	32.44	9.42	112	169	Average																																																																																																																																																																																																																																	
3	2651.00	55.03	74.00	-18.97		42.39	27.49	8.34	32.68	9.49	137	171	Peak																																																																																																																																																																																																																																	
4	2651.00	47.96	54.00	-6.04		35.32	27.49	8.34	32.68	9.49	137	171	Average																																																																																																																																																																																																																																	
5	4824.00	50.73	74.00	-23.27		39.30	32.20	11.53	33.67	1.37	100	145	Peak																																																																																																																																																																																																																																	
6	4824.00	46.49	54.00	-7.51		35.06	32.20	11.53	33.67	1.37	100	145	Average																																																																																																																																																																																																																																	
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																																																																																		
1	2166.00	49.47	74.00	-24.53		38.38	26.40	7.71	32.44	9.42	140	156	Peak																																																																																																																																																																																																																																	
2	2166.00	38.76	54.00	-15.24		27.67	26.40	7.71	32.44	9.42	140	156	Average																																																																																																																																																																																																																																	
3	2646.00	53.71	74.00	-20.29		41.06	27.50	8.34	32.68	9.49	307	109	Peak																																																																																																																																																																																																																																	
4	2646.00	46.88	54.00	-7.12		34.23	27.50	8.34	32.68	9.49	307	109	Average																																																																																																																																																																																																																																	
5	4824.00	51.15	74.00	-22.85		39.72	32.20	11.53	33.67	1.37	300	193	Peak																																																																																																																																																																																																																																	
6	4824.00	45.61	54.00	-8.39		34.18	32.20	11.53	33.67	1.37	300	193	Average																																																																																																																																																																																																																																	



Mode	8																																																																									
	Band Edge - L																																																																									
	2400-2483.5_802.11ax HE20_CH06_Full RU_2437MHz																																																																									
ANT	1																																																																									
Pol.	Horizontal	Fundamental																																																																								
Peak	Level (dBuV/m) Date: 2025-06-19 Site : 03CH22-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq Level Line Margin Level Factor Loss Factor Factor</th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><th>MHz dBuV/m dBuV/m dB dB dB dB dB dB dB cm deg</th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><td>1 2385.69 55.02 74.00 -18.98 43.46 26.64 8.06 32.58 9.44 167 162 Peak</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq Level Line Margin Level Factor Loss Factor Factor									MHz dBuV/m dBuV/m dB dB dB dB dB dB dB cm deg									1 2385.69 55.02 74.00 -18.98 43.46 26.64 8.06 32.58 9.44 167 162 Peak									Level (dBuV/m) Date: 2025-06-19 Site : 03CH22-HY Condition: PEAK_74 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq Level Line Margin Level Factor Loss Factor Factor</th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><th>MHz dBuV/m dBuV/m dB dB dB dB dB dB dB cm deg</th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><td>1 2437.00 107.04 ----- 95.31 26.76 8.14 32.62 9.45 167 162 Peak</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq Level Line Margin Level Factor Loss Factor Factor									MHz dBuV/m dBuV/m dB dB dB dB dB dB dB cm deg									1 2437.00 107.04 ----- 95.31 26.76 8.14 32.62 9.45 167 162 Peak								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																		
Freq Level Line Margin Level Factor Loss Factor Factor																																																																										
MHz dBuV/m dBuV/m dB dB dB dB dB dB dB cm deg																																																																										
1 2385.69 55.02 74.00 -18.98 43.46 26.64 8.06 32.58 9.44 167 162 Peak																																																																										
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																		
Freq Level Line Margin Level Factor Loss Factor Factor																																																																										
MHz dBuV/m dBuV/m dB dB dB dB dB dB dB cm deg																																																																										
1 2437.00 107.04 ----- 95.31 26.76 8.14 32.62 9.45 167 162 Peak																																																																										
Avg	Level (dBuV/m) Date: 2025-06-19 Site : 03CH22-HY Condition: AVG_BE_54 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL : RBW:1000.000kHz VBW:1.200kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq Level Line Margin Level Factor Loss Factor Factor</th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><th>MHz dBuV/m dBuV/m dB dB dB dB dB dB dB cm deg</th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><td>1 2388.99 45.16 54.00 -8.84 33.64 26.61 8.06 32.59 9.44 167 162 Average</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq Level Line Margin Level Factor Loss Factor Factor									MHz dBuV/m dBuV/m dB dB dB dB dB dB dB cm deg									1 2388.99 45.16 54.00 -8.84 33.64 26.61 8.06 32.59 9.44 167 162 Average									Level (dBuV/m) Date: 2025-06-19 Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL : RBW:1000.000kHz VBW:1.200kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq Level Line Margin Level Factor Loss Factor Factor</th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><th>MHz dBuV/m dBuV/m dB dB dB dB dB dB dB cm deg</th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><td>1 2437.00 95.81 ----- 84.17 26.68 8.13 32.62 9.45 167 162 Average</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq Level Line Margin Level Factor Loss Factor Factor									MHz dBuV/m dBuV/m dB dB dB dB dB dB dB cm deg									1 2437.00 95.81 ----- 84.17 26.68 8.13 32.62 9.45 167 162 Average								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																		
Freq Level Line Margin Level Factor Loss Factor Factor																																																																										
MHz dBuV/m dBuV/m dB dB dB dB dB dB dB cm deg																																																																										
1 2388.99 45.16 54.00 -8.84 33.64 26.61 8.06 32.59 9.44 167 162 Average																																																																										
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																		
Freq Level Line Margin Level Factor Loss Factor Factor																																																																										
MHz dBuV/m dBuV/m dB dB dB dB dB dB dB cm deg																																																																										
1 2437.00 95.81 ----- 84.17 26.68 8.13 32.62 9.45 167 162 Average																																																																										



Mode	8	
	Band Edge - R	
	2400-2483.5_802.11ax HE20_CH06_Full RU_2437MHz	
ANT	1	
Pol.	Horizontal	Fundamental
Peak	</	



Mode	8																																																																																																							
	Band Edge - L																																																																																																							
	2400-2483.5_802.11ax HE20_CH06_Full RU_2437MHz																																																																																																							
ANT	1																																																																																																							
Pol.	Vertical						Fundamental																																																																																																	
Peak																																																																																																								
	Site : 03CH22-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C04A18EN_250520 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto						Site : 03CH22-HY Condition: PEAK_74 3m DRH18-E_LE2C04A18EN_250520 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto																																																																																																	
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2389.63</td><td>51.44</td><td>74.00</td><td>-22.56</td><td>39.93</td><td>26.60</td><td>8.06</td><td>32.59</td><td>9.44</td><td>200</td><td>182 Peak</td></tr></table>								Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2389.63	51.44	74.00	-22.56	39.93	26.60	8.06	32.59	9.44	200	182 Peak	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2437.00</td><td>101.46</td><td>-----</td><td>-----</td><td>89.80</td><td>26.70</td><td>8.13</td><td>32.62</td><td>9.45</td><td>200</td><td>182 Peak</td></tr></table>							Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2437.00	101.46	-----	-----	89.80	26.70	8.13	32.62	9.45	200
		Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																														
1	2389.63	51.44	74.00	-22.56	39.93	26.60	8.06	32.59	9.44	200	182 Peak																																																																																													
		Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																														
1	2437.00	101.46	-----	-----	89.80	26.70	8.13	32.62	9.45	200	182 Peak																																																																																													
Avg																																																																																																								
	Site : 03CH22-HY Condition: AVG_BE_54 3m DRH18-E_LE2C04A18EN_250520 VERTICAL : RBW:1000.000kHz VBW:1.200kHz SMT:Auto						Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_250520 VERTICAL : RBW:1000.000kHz VBW:1.200kHz SMT:Auto																																																																																																	
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2389.76</td><td>41.44</td><td>54.00</td><td>-12.56</td><td>29.93</td><td>26.60</td><td>8.06</td><td>32.59</td><td>9.44</td><td>200</td><td>182 Average</td></tr></table>								Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2389.76	41.44	54.00	-12.56	29.93	26.60	8.06	32.59	9.44	200	182 Average	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2437.00</td><td>91.23</td><td>-----</td><td>-----</td><td>79.57</td><td>26.70</td><td>8.13</td><td>32.62</td><td>9.45</td><td>200</td><td>182 Average</td></tr></table>							Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2437.00	91.23	-----	-----	79.57	26.70	8.13	32.62	9.45	200
		Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																														
1	2389.76	41.44	54.00	-12.56	29.93	26.60	8.06	32.59	9.44	200	182 Average																																																																																													
		Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																														
1	2437.00	91.23	-----	-----	79.57	26.70	8.13	32.62	9.45	200	182 Average																																																																																													







Mode	8										
	Band Edge - R										
	2400-2483.5_802.11ax HE20_CH06_Full RU_2437MHz										
ANT	1										
Pol.	Vertical						Fundamental				
Peak											



Mode	8																																																																																																																																																																																																																																																																																																					
	Harmonic																																																																																																																																																																																																																																																																																																					
	2400-2483.5_802.11ax HE20_CH06_Full RU_2437MHz																																																																																																																																																																																																																																																																																																					
ANT	1																																																																																																																																																																																																																																																																																																					
Pol.	Horizontal							Vertical																																																																																																																																																																																																																																																																																														
Peak Avg	Level (dBuV/m) Date: 2025-06-18 Site : 03CH22-HY Condition: PEAK_74 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2286.00</td><td>55.06</td><td>74.00</td><td>-18.94</td><td>43.78</td><td>26.56</td><td>7.78</td><td>32.47</td><td>9.41</td><td>167</td><td>166</td><td>Peak</td><td></td></tr><tr><td>2</td><td>2286.00</td><td>43.39</td><td>54.00</td><td>-10.61</td><td>32.11</td><td>26.56</td><td>7.78</td><td>32.47</td><td>9.41</td><td>167</td><td>166</td><td>Average</td><td></td></tr><tr><td>3</td><td>2686.00</td><td>55.54</td><td>74.00</td><td>-18.46</td><td>42.85</td><td>27.50</td><td>8.39</td><td>32.69</td><td>9.49</td><td>111</td><td>170</td><td>Peak</td><td></td></tr><tr><td>4</td><td>2686.00</td><td>47.87</td><td>54.00</td><td>-6.13</td><td>35.18</td><td>27.50</td><td>8.39</td><td>32.69</td><td>9.49</td><td>111</td><td>170</td><td>Average</td><td></td></tr><tr><td>5</td><td>4874.00</td><td>49.91</td><td>74.00</td><td>-24.09</td><td>38.42</td><td>32.30</td><td>11.60</td><td>33.67</td><td>1.26</td><td>103</td><td>145</td><td>Peak</td><td></td></tr><tr><td>6</td><td>4874.00</td><td>45.94</td><td>54.00</td><td>-8.06</td><td>34.45</td><td>32.30</td><td>11.60</td><td>33.67</td><td>1.26</td><td>103</td><td>145</td><td>Average</td><td></td></tr><tr><td>7</td><td>7311.00</td><td>49.35</td><td>74.00</td><td>-24.65</td><td>33.46</td><td>37.20</td><td>14.28</td><td>36.59</td><td>1.00</td><td>--</td><td>--</td><td>Peak</td><td></td></tr><tr><td>8</td><td>7311.00</td><td>39.87</td><td>54.00</td><td>-14.13</td><td>23.98</td><td>37.20</td><td>14.28</td><td>36.59</td><td>1.00</td><td>--</td><td>--</td><td>Average</td><td></td></tr></table>								Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg		1	2286.00	55.06	74.00	-18.94	43.78	26.56	7.78	32.47	9.41	167	166	Peak		2	2286.00	43.39	54.00	-10.61	32.11	26.56	7.78	32.47	9.41	167	166	Average		3	2686.00	55.54	74.00	-18.46	42.85	27.50	8.39	32.69	9.49	111	170	Peak		4	2686.00	47.87	54.00	-6.13	35.18	27.50	8.39	32.69	9.49	111	170	Average		5	4874.00	49.91	74.00	-24.09	38.42	32.30	11.60	33.67	1.26	103	145	Peak		6	4874.00	45.94	54.00	-8.06	34.45	32.30	11.60	33.67	1.26	103	145	Average		7	7311.00	49.35	74.00	-24.65	33.46	37.20	14.28	36.59	1.00	--	--	Peak		8	7311.00	39.87	54.00	-14.13	23.98	37.20	14.28	36.59	1.00	--	--	Average		Level (dBuV/m) Date: 2025-06-18 Site : 03CH22-HY Condition: PEAK_74 3m DRH18-E_LE2C04A18EN_250520 VERTICAL <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2286.00</td><td>52.64</td><td>74.00</td><td>-21.36</td><td>41.36</td><td>26.56</td><td>7.78</td><td>32.47</td><td>9.41</td><td>300</td><td>114</td><td>Peak</td><td></td></tr><tr><td>2</td><td>2286.00</td><td>41.08</td><td>54.00</td><td>-12.92</td><td>29.80</td><td>26.56</td><td>7.78</td><td>32.47</td><td>9.41</td><td>300</td><td>114</td><td>Average</td><td></td></tr><tr><td>3</td><td>2686.00</td><td>53.92</td><td>74.00</td><td>-20.08</td><td>41.23</td><td>27.50</td><td>8.39</td><td>32.69</td><td>9.49</td><td>307</td><td>108</td><td>Peak</td><td></td></tr><tr><td>4</td><td>2686.00</td><td>46.91</td><td>54.00</td><td>-7.09</td><td>34.22</td><td>27.50</td><td>8.39</td><td>32.69</td><td>9.49</td><td>307</td><td>108</td><td>Average</td><td></td></tr><tr><td>5</td><td>4874.00</td><td>50.06</td><td>74.00</td><td>-23.94</td><td>38.57</td><td>32.30</td><td>11.60</td><td>33.67</td><td>1.26</td><td>333</td><td>192</td><td>Peak</td><td></td></tr><tr><td>6</td><td>4874.00</td><td>44.85</td><td>54.00</td><td>-9.15</td><td>33.36</td><td>32.30</td><td>11.60</td><td>33.67</td><td>1.26</td><td>333</td><td>192</td><td>Average</td><td></td></tr><tr><td>7</td><td>7311.00</td><td>49.24</td><td>74.00</td><td>-24.76</td><td>33.35</td><td>37.20</td><td>14.28</td><td>36.59</td><td>1.00</td><td>--</td><td>--</td><td>Peak</td><td></td></tr><tr><td>8</td><td>7311.00</td><td>39.22</td><td>54.00</td><td>-14.78</td><td>23.33</td><td>37.20</td><td>14.28</td><td>36.59</td><td>1.00</td><td>--</td><td>--</td><td>Average</td><td></td></tr></table>								Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg		1	2286.00	52.64	74.00	-21.36	41.36	26.56	7.78	32.47	9.41	300	114	Peak		2	2286.00	41.08	54.00	-12.92	29.80	26.56	7.78	32.47	9.41	300	114	Average		3	2686.00	53.92	74.00	-20.08	41.23	27.50	8.39	32.69	9.49	307	108	Peak		4	2686.00	46.91	54.00	-7.09	34.22	27.50	8.39	32.69	9.49	307	108	Average		5	4874.00	50.06	74.00	-23.94	38.57	32.30	11.60	33.67	1.26	333	192	Peak		6	4874.00	44.85	54.00	-9.15	33.36	32.30	11.60	33.67	1.26	333	192	Average		7	7311.00	49.24	74.00	-24.76	33.35	37.20	14.28	36.59	1.00	--	--	Peak		8	7311.00	39.22	54.00	-14.78	23.33	37.20	14.28	36.59	1.00	--	--	Average	
		Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																																																																																																								
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																																																																																																																																																																																																																									
1	2286.00	55.06	74.00	-18.94	43.78	26.56	7.78	32.47	9.41	167	166	Peak																																																																																																																																																																																																																																																																																										
2	2286.00	43.39	54.00	-10.61	32.11	26.56	7.78	32.47	9.41	167	166	Average																																																																																																																																																																																																																																																																																										
3	2686.00	55.54	74.00	-18.46	42.85	27.50	8.39	32.69	9.49	111	170	Peak																																																																																																																																																																																																																																																																																										
4	2686.00	47.87	54.00	-6.13	35.18	27.50	8.39	32.69	9.49	111	170	Average																																																																																																																																																																																																																																																																																										
5	4874.00	49.91	74.00	-24.09	38.42	32.30	11.60	33.67	1.26	103	145	Peak																																																																																																																																																																																																																																																																																										
6	4874.00	45.94	54.00	-8.06	34.45	32.30	11.60	33.67	1.26	103	145	Average																																																																																																																																																																																																																																																																																										
7	7311.00	49.35	74.00	-24.65	33.46	37.20	14.28	36.59	1.00	--	--	Peak																																																																																																																																																																																																																																																																																										
8	7311.00	39.87	54.00	-14.13	23.98	37.20	14.28	36.59	1.00	--	--	Average																																																																																																																																																																																																																																																																																										
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																																																																																																																																																																																																																										
1	2286.00	52.64	74.00	-21.36	41.36	26.56	7.78	32.47	9.41	300	114	Peak																																																																																																																																																																																																																																																																																										
2	2286.00	41.08	54.00	-12.92	29.80	26.56	7.78	32.47	9.41	300	114	Average																																																																																																																																																																																																																																																																																										
3	2686.00	53.92	74.00	-20.08	41.23	27.50	8.39	32.69	9.49	307	108	Peak																																																																																																																																																																																																																																																																																										
4	2686.00	46.91	54.00	-7.09	34.22	27.50	8.39	32.69	9.49	307	108	Average																																																																																																																																																																																																																																																																																										
5	4874.00	50.06	74.00	-23.94	38.57	32.30	11.60	33.67	1.26	333	192	Peak																																																																																																																																																																																																																																																																																										
6	4874.00	44.85	54.00	-9.15	33.36	32.30	11.60	33.67	1.26	333	192	Average																																																																																																																																																																																																																																																																																										
7	7311.00	49.24	74.00	-24.76	33.35	37.20	14.28	36.59	1.00	--	--	Peak																																																																																																																																																																																																																																																																																										
8	7311.00	39.22	54.00	-14.78	23.33	37.20	14.28	36.59	1.00	--	--	Average																																																																																																																																																																																																																																																																																										

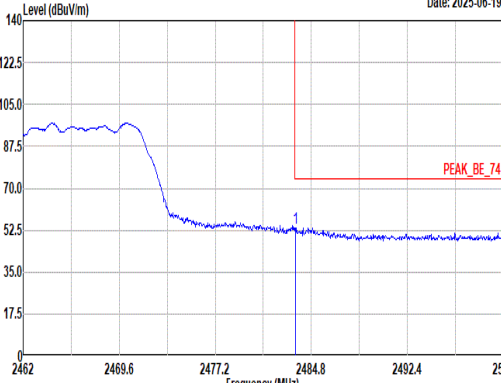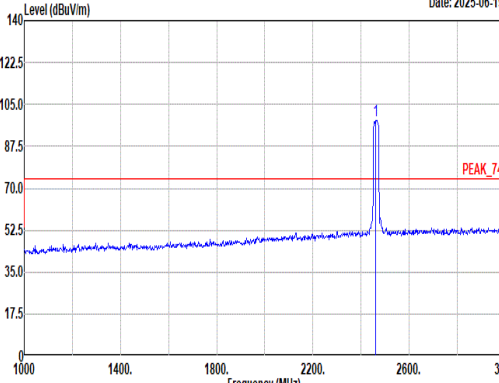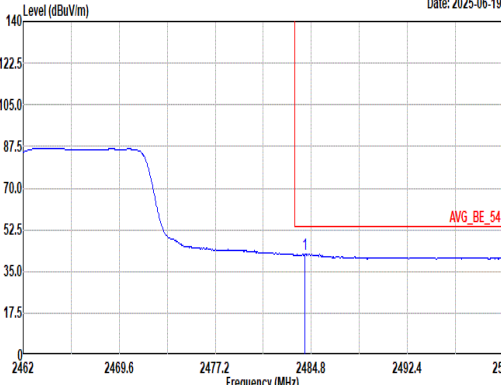
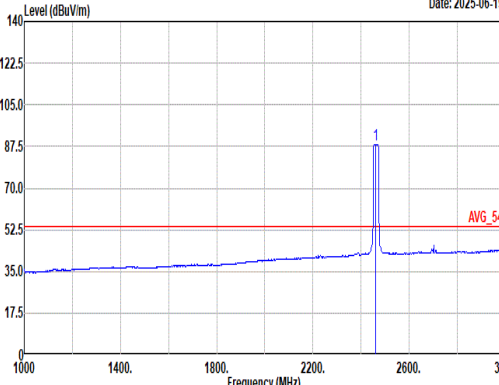


Mode	9																																																																																									
	Band Edge																																																																																									
	2400-2483.5_802.11ax HE20_CH11_Full RU_2462MHz																																																																																									
ANT	1																																																																																									
Pol.	Horizontal					Fundamental																																																																																				
Peak	Level (dBuV/m) Date: 2025-06-19  PEAK_BE_74 Frequency (MHz) Site : 03CH22-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2483.55</td><td>53.54</td><td>74.00</td><td>-20.46</td><td>41.81</td><td>26.74</td><td>8.18</td><td>32.65</td><td>9.46</td><td>115 159 Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2483.55	53.54	74.00	-20.46	41.81	26.74	8.18	32.65	9.46	115 159 Peak	Level (dBuV/m) Date: 2025-06-19  PEAK_74 Frequency (MHz) Site : 03CH22-HY Condition: PEAK_74 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2462.00</td><td>98.35</td><td>-----</td><td>-----</td><td>86.68</td><td>26.70</td><td>8.15</td><td>32.63</td><td>9.45</td><td>115 159 Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2462.00	98.35	-----	-----	86.68	26.70	8.15	32.63	9.45	115 159 Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1 2483.55	53.54	74.00	-20.46	41.81	26.74	8.18	32.65	9.46	115 159 Peak																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1 2462.00	98.35	-----	-----	86.68	26.70	8.15	32.63	9.45	115 159 Peak																																																																																	
Avg	Level (dBuV/m) Date: 2025-06-19  AVG_BE_54 Frequency (MHz) Site : 03CH22-HY Condition: AVG_BE_54 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL : RBW:1000.000kHz VBW:1.200kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2484.31</td><td>42.26</td><td>54.00</td><td>-11.74</td><td>30.53</td><td>26.74</td><td>8.18</td><td>32.65</td><td>9.46</td><td>115 159 Average</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2484.31	42.26	54.00	-11.74	30.53	26.74	8.18	32.65	9.46	115 159 Average	Level (dBuV/m) Date: 2025-06-19  AVG_54 Frequency (MHz) Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL : RBW:1000.000kHz VBW:1.200kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2462.00</td><td>88.42</td><td>-----</td><td>-----</td><td>76.70</td><td>26.76</td><td>8.14</td><td>32.63</td><td>9.45</td><td>115 159 Average</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2462.00	88.42	-----	-----	76.70	26.76	8.14	32.63	9.45	115 159 Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1 2484.31	42.26	54.00	-11.74	30.53	26.74	8.18	32.65	9.46	115 159 Average																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1 2462.00	88.42	-----	-----	76.70	26.76	8.14	32.63	9.45	115 159 Average																																																																																	



Mode	9																																																																									
	Band Edge																																																																									
	2400-2483.5_802.11ax HE20_CH11_Full RU_2462MHz																																																																									
ANT	1																																																																									
Pol.	Vertical	Fundamental																																																																								
Peak	Level (dBuV/m) Date: 2025-06-19 Site : 03CH22-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C04A18EN_250520 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq Level Line Margin Level Factor Loss Factor Factor</th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><th>MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg</th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><td>1 2484.65 52.15 74.00 -21.85 40.41 26.75 8.18 32.65 9.46 345 99 Peak</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq Level Line Margin Level Factor Loss Factor Factor									MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg									1 2484.65 52.15 74.00 -21.85 40.41 26.75 8.18 32.65 9.46 345 99 Peak									Level (dBuV/m) Date: 2025-06-19 Site : 03CH22-HY Condition: PEAK_74 3m DRH18-E_LE2C04A18EN_250520 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq Level Line Margin Level Factor Loss Factor Factor</th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><th>MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg</th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><td>1 2462.00 96.21 ----- 84.54 26.70 8.15 32.63 9.45 345 99 Peak</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq Level Line Margin Level Factor Loss Factor Factor									MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg									1 2462.00 96.21 ----- 84.54 26.70 8.15 32.63 9.45 345 99 Peak								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																	
Freq Level Line Margin Level Factor Loss Factor Factor																																																																										
MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg																																																																										
1 2484.65 52.15 74.00 -21.85 40.41 26.75 8.18 32.65 9.46 345 99 Peak																																																																										
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																		
Freq Level Line Margin Level Factor Loss Factor Factor																																																																										
MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg																																																																										
1 2462.00 96.21 ----- 84.54 26.70 8.15 32.63 9.45 345 99 Peak																																																																										
Avg	Level (dBuV/m) Date: 2025-06-19 Site : 03CH22-HY Condition: AVG_BE_54 3m DRH18-E_LE2C04A18EN_250520 VERTICAL : RBW:1000.000kHz VBW:1.200kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq Level Line Margin Level Factor Loss Factor Factor</th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><th>MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg</th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><td>1 2483.55 41.10 54.00 -12.90 29.37 26.74 8.18 32.65 9.46 345 99 Average</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq Level Line Margin Level Factor Loss Factor Factor									MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg									1 2483.55 41.10 54.00 -12.90 29.37 26.74 8.18 32.65 9.46 345 99 Average									Level (dBuV/m) Date: 2025-06-19 Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_250520 VERTICAL : RBW:1000.000kHz VBW:1.200kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq Level Line Margin Level Factor Loss Factor Factor</th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><th>MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg</th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><td>1 2462.00 85.83 ----- 74.19 26.66 8.16 32.64 9.46 345 99 Average</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq Level Line Margin Level Factor Loss Factor Factor									MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg									1 2462.00 85.83 ----- 74.19 26.66 8.16 32.64 9.46 345 99 Average								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																		
Freq Level Line Margin Level Factor Loss Factor Factor																																																																										
MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg																																																																										
1 2483.55 41.10 54.00 -12.90 29.37 26.74 8.18 32.65 9.46 345 99 Average																																																																										
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																		
Freq Level Line Margin Level Factor Loss Factor Factor																																																																										
MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg																																																																										
1 2462.00 85.83 ----- 74.19 26.66 8.16 32.64 9.46 345 99 Average																																																																										

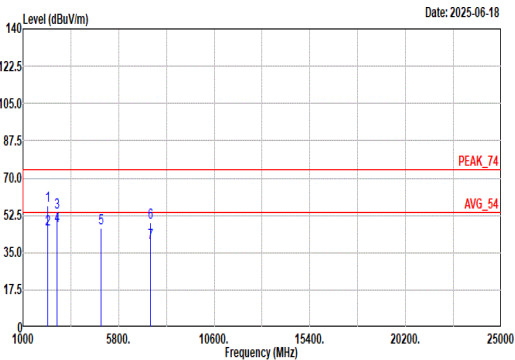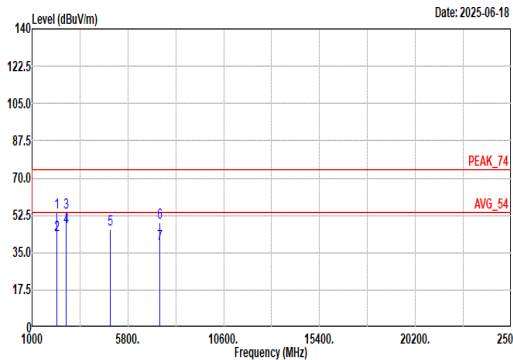

Mode	9																																																																																																																																																																																																																
	Harmonic																																																																																																																																																																																																																
	2400-2483.5_802.11ax HE20_CH11_Full RU_2462MHz																																																																																																																																																																																																																
ANT	1																																																																																																																																																																																																																
Pol.	Horizontal					Vertical																																																																																																																																																																																																											
Peak Avg	 Level (dBuV/m) Date: 2025-06-18 Site : 03CH22-HY Condition: PEAK_74 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL					 Level (dBuV/m) Date: 2025-06-18 Site : 03CH22-HY Condition: PEAK_74 3m DRH18-E_LE2C04A18EN_250520 VERTICAL																																																																																																																																																																																																											
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2224.00</td><td>56.82</td><td>74.00</td><td>-17.18</td><td>45.44</td><td>26.64</td><td>7.81</td><td>32.48</td><td>9.41</td><td>109 168 Peak</td></tr><tr><td>2 2224.00</td><td>46.16</td><td>54.00</td><td>-7.84</td><td>34.78</td><td>26.64</td><td>7.81</td><td>32.48</td><td>9.41</td><td>109 168 Average</td></tr><tr><td>3 2704.00</td><td>54.09</td><td>74.00</td><td>-19.91</td><td>41.38</td><td>27.50</td><td>8.42</td><td>32.69</td><td>9.48</td><td>127 169 Peak</td></tr><tr><td>4 2704.00</td><td>47.50</td><td>54.00</td><td>-6.50</td><td>34.79</td><td>27.50</td><td>8.42</td><td>32.69</td><td>9.48</td><td>127 169 Average</td></tr><tr><td>5 4924.00</td><td>46.51</td><td>74.00</td><td>-27.49</td><td>34.06</td><td>32.50</td><td>11.67</td><td>33.67</td><td>1.15</td><td>-- -- Peak</td></tr><tr><td>6 7386.00</td><td>48.97</td><td>74.00</td><td>-25.03</td><td>33.24</td><td>37.13</td><td>14.28</td><td>36.71</td><td>1.03</td><td>-- -- Peak</td></tr><tr><td>7 7386.00</td><td>39.41</td><td>54.00</td><td>-14.59</td><td>23.68</td><td>37.13</td><td>14.28</td><td>36.71</td><td>1.03</td><td>-- -- Average</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor				MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 2224.00	56.82	74.00	-17.18	45.44	26.64	7.81	32.48	9.41	109 168 Peak	2 2224.00	46.16	54.00	-7.84	34.78	26.64	7.81	32.48	9.41	109 168 Average	3 2704.00	54.09	74.00	-19.91	41.38	27.50	8.42	32.69	9.48	127 169 Peak	4 2704.00	47.50	54.00	-6.50	34.79	27.50	8.42	32.69	9.48	127 169 Average	5 4924.00	46.51	74.00	-27.49	34.06	32.50	11.67	33.67	1.15	-- -- Peak	6 7386.00	48.97	74.00	-25.03	33.24	37.13	14.28	36.71	1.03	-- -- Peak	7 7386.00	39.41	54.00	-14.59	23.68	37.13	14.28	36.71	1.03	-- -- Average	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2224.00</td><td>53.72</td><td>74.00</td><td>-20.28</td><td>42.34</td><td>26.64</td><td>7.81</td><td>32.48</td><td>9.41</td><td>336 116 Peak</td></tr><tr><td>2 2224.00</td><td>43.27</td><td>54.00</td><td>-10.73</td><td>31.09</td><td>26.64</td><td>7.81</td><td>32.48</td><td>9.41</td><td>336 116 Average</td></tr><tr><td>3 2704.00</td><td>54.06</td><td>74.00</td><td>-19.94</td><td>41.35</td><td>27.50</td><td>8.42</td><td>32.69</td><td>9.48</td><td>291 108 Peak</td></tr><tr><td>4 2704.00</td><td>46.94</td><td>54.00</td><td>-7.06</td><td>34.23</td><td>27.50</td><td>8.42</td><td>32.69</td><td>9.48</td><td>291 108 Average</td></tr><tr><td>5 4924.00</td><td>45.98</td><td>74.00</td><td>-28.02</td><td>34.33</td><td>32.50</td><td>11.67</td><td>33.67</td><td>1.15</td><td>-- -- Peak</td></tr><tr><td>6 7386.00</td><td>49.08</td><td>74.00</td><td>-24.92</td><td>33.35</td><td>37.13</td><td>14.28</td><td>36.71</td><td>1.03</td><td>-- -- Peak</td></tr><tr><td>7 7386.00</td><td>39.00</td><td>54.00</td><td>-15.00</td><td>23.27</td><td>37.13</td><td>14.28</td><td>36.71</td><td>1.03</td><td>-- -- Average</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor				MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 2224.00	53.72	74.00	-20.28	42.34	26.64	7.81	32.48	9.41	336 116 Peak	2 2224.00	43.27	54.00	-10.73	31.09	26.64	7.81	32.48	9.41	336 116 Average	3 2704.00	54.06	74.00	-19.94	41.35	27.50	8.42	32.69	9.48	291 108 Peak	4 2704.00	46.94	54.00	-7.06	34.23	27.50	8.42	32.69	9.48	291 108 Average	5 4924.00	45.98	74.00	-28.02	34.33	32.50	11.67	33.67	1.15	-- -- Peak	6 7386.00	49.08	74.00	-24.92	33.35	37.13	14.28	36.71	1.03	-- -- Peak	7 7386.00	39.00	54.00	-15.00	23.27	37.13	14.28	36.71	1.03
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																								
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																																																																																																											
MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																																																								
1 2224.00	56.82	74.00	-17.18	45.44	26.64	7.81	32.48	9.41	109 168 Peak																																																																																																																																																																																																								
2 2224.00	46.16	54.00	-7.84	34.78	26.64	7.81	32.48	9.41	109 168 Average																																																																																																																																																																																																								
3 2704.00	54.09	74.00	-19.91	41.38	27.50	8.42	32.69	9.48	127 169 Peak																																																																																																																																																																																																								
4 2704.00	47.50	54.00	-6.50	34.79	27.50	8.42	32.69	9.48	127 169 Average																																																																																																																																																																																																								
5 4924.00	46.51	74.00	-27.49	34.06	32.50	11.67	33.67	1.15	-- -- Peak																																																																																																																																																																																																								
6 7386.00	48.97	74.00	-25.03	33.24	37.13	14.28	36.71	1.03	-- -- Peak																																																																																																																																																																																																								
7 7386.00	39.41	54.00	-14.59	23.68	37.13	14.28	36.71	1.03	-- -- Average																																																																																																																																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																								
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																																																																																																											
MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																																																								
1 2224.00	53.72	74.00	-20.28	42.34	26.64	7.81	32.48	9.41	336 116 Peak																																																																																																																																																																																																								
2 2224.00	43.27	54.00	-10.73	31.09	26.64	7.81	32.48	9.41	336 116 Average																																																																																																																																																																																																								
3 2704.00	54.06	74.00	-19.94	41.35	27.50	8.42	32.69	9.48	291 108 Peak																																																																																																																																																																																																								
4 2704.00	46.94	54.00	-7.06	34.23	27.50	8.42	32.69	9.48	291 108 Average																																																																																																																																																																																																								
5 4924.00	45.98	74.00	-28.02	34.33	32.50	11.67	33.67	1.15	-- -- Peak																																																																																																																																																																																																								
6 7386.00	49.08	74.00	-24.92	33.35	37.13	14.28	36.71	1.03	-- -- Peak																																																																																																																																																																																																								
7 7386.00	39.00	54.00	-15.00	23.27	37.13	14.28	36.71	1.03	-- -- Average																																																																																																																																																																																																								



Mode	10																																																																																									
	Band Edge																																																																																									
	2400-2483.5_802.11ax HE20_CH1_106 RU_2412MHz																																																																																									
ANT	1																																																																																									
Pol.	Horizontal						Fundamental																																																																																			
Peak	Level (dBuV/m) Date: 2025-06-25 Site : 03CH22-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2389.95</td><td>62.59</td><td>74.00</td><td>-11.41</td><td>51.08</td><td>26.60</td><td>8.06</td><td>32.59</td><td>9.44</td><td>100</td><td></td><td>9 Peak</td></tr></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2389.95	62.59	74.00	-11.41	51.08	26.60	8.06	32.59	9.44	100		9 Peak	Level (dBuV/m) Date: 2025-06-25 Site : 03CH22-HY Condition: PEAK_74 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2412.00</td><td>110.66</td><td>-----</td><td>-----</td><td>98.95</td><td>26.78</td><td>8.09</td><td>32.60</td><td>9.44</td><td>100</td><td></td><td>9 Peak</td></tr></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2412.00	110.66	-----	-----	98.95	26.78	8.09	32.60	9.44	100		9 Peak
		Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																															
1	2389.95	62.59	74.00	-11.41	51.08	26.60	8.06	32.59	9.44	100		9 Peak																																																																														
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																															
1	2412.00	110.66	-----	-----	98.95	26.78	8.09	32.60	9.44	100		9 Peak																																																																														
Avg	Level (dBuV/m) Date: 2025-06-25 Site : 03CH22-HY Condition: AVG_BE_54 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2389.95</td><td>48.72</td><td>54.00</td><td>-5.28</td><td>37.21</td><td>26.60</td><td>8.06</td><td>32.59</td><td>9.44</td><td>100</td><td></td><td>9 Average</td></tr></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2389.95	48.72	54.00	-5.28	37.21	26.60	8.06	32.59	9.44	100		9 Average	Level (dBuV/m) Date: 2025-06-25 Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2412.00</td><td>101.85</td><td>-----</td><td>-----</td><td>90.16</td><td>26.76</td><td>8.09</td><td>32.60</td><td>9.44</td><td>100</td><td></td><td>9 Average</td></tr></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2412.00	101.85	-----	-----	90.16	26.76	8.09	32.60	9.44	100		9 Average
		Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																															
1	2389.95	48.72	54.00	-5.28	37.21	26.60	8.06	32.59	9.44	100		9 Average																																																																														
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																															
1	2412.00	101.85	-----	-----	90.16	26.76	8.09	32.60	9.44	100		9 Average																																																																														







Mode	10																																																																																									
	Band Edge																																																																																									
	2400-2483.5_802.11ax HE20_CH1_106 RU_2412MHz																																																																																									
ANT	1																																																																																									
Pol.	Vertical					Fundamental																																																																																				
Peak	Level (dBuV/m) Date: 2025-06-25 Site : 03CH22-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C04A18EN_250520 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2389.69</td><td>63.45</td><td>74.00 -10.55</td><td>51.94</td><td>26.60</td><td>8.06</td><td>32.59</td><td>9.44</td><td>150</td><td>34 Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2389.69	63.45	74.00 -10.55	51.94	26.60	8.06	32.59	9.44	150	34 Peak	Level (dBuV/m) Date: 2025-06-25 Site : 03CH22-HY Condition: PEAK_74 3m DRH18-E_LE2C04A18EN_250520 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2412.00</td><td>110.46</td><td>-----</td><td>98.77</td><td>26.76</td><td>8.09</td><td>32.60</td><td>9.44</td><td>150</td><td>34 Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2412.00	110.46	-----	98.77	26.76	8.09	32.60	9.44	150	34 Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1 2389.69	63.45	74.00 -10.55	51.94	26.60	8.06	32.59	9.44	150	34 Peak																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1 2412.00	110.46	-----	98.77	26.76	8.09	32.60	9.44	150	34 Peak																																																																																	
Avg	Level (dBuV/m) Date: 2025-06-25 Site : 03CH22-HY Condition: AVG_BE_54 3m DRH18-E_LE2C04A18EN_250520 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2389.95</td><td>50.02</td><td>54.00 -3.98</td><td>38.51</td><td>26.60</td><td>8.06</td><td>32.59</td><td>9.44</td><td>150</td><td>34 Average</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2389.95	50.02	54.00 -3.98	38.51	26.60	8.06	32.59	9.44	150	34 Average	Level (dBuV/m) Date: 2025-06-25 Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_250520 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2412.00</td><td>102.33</td><td>-----</td><td>90.64</td><td>26.76</td><td>8.09</td><td>32.60</td><td>9.44</td><td>150</td><td>34 Average</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2412.00	102.33	-----	90.64	26.76	8.09	32.60	9.44	150	34 Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1 2389.95	50.02	54.00 -3.98	38.51	26.60	8.06	32.59	9.44	150	34 Average																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1 2412.00	102.33	-----	90.64	26.76	8.09	32.60	9.44	150	34 Average																																																																																	



Mode	10																																																																																																																																																																																																																																													
	Harmonic																																																																																																																																																																																																																																													
	2400-2483.5_802.11ax HE20_CH1_106 RU_2412MHz																																																																																																																																																																																																																																													
ANT	1																																																																																																																																																																																																																																													
Pol.	Horizontal							Vertical																																																																																																																																																																																																																																						
Peak Avg	Level (dBuV/m) Date: 2025-06-25 Site : 03CH22-HY Condition: PEAK_74 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2163.00</td><td>52.50</td><td>74.00</td><td>-21.50</td><td></td><td>41.42</td><td>26.40</td><td>7.70</td><td>32.44</td><td>9.42</td><td>121</td><td></td><td>3 Peak</td></tr><tr><td>2</td><td>2163.00</td><td>41.67</td><td>54.00</td><td>-12.33</td><td></td><td>30.59</td><td>26.40</td><td>7.70</td><td>32.44</td><td>9.42</td><td>121</td><td></td><td>3 Average</td></tr><tr><td>3</td><td>2651.00</td><td>54.50</td><td>74.00</td><td>-19.50</td><td></td><td>41.06</td><td>27.49</td><td>8.34</td><td>32.68</td><td>9.49</td><td>117</td><td></td><td>18 Peak</td></tr><tr><td>4</td><td>2651.00</td><td>48.34</td><td>54.00</td><td>-5.66</td><td></td><td>35.70</td><td>27.49</td><td>8.34</td><td>32.68</td><td>9.49</td><td>117</td><td></td><td>18 Average</td></tr><tr><td>5</td><td>4824.00</td><td>49.31</td><td>74.00</td><td>-24.69</td><td></td><td>37.88</td><td>32.20</td><td>11.53</td><td>33.67</td><td>1.37</td><td>100</td><td></td><td>147 Peak</td></tr><tr><td>6</td><td>4824.00</td><td>44.67</td><td>54.00</td><td>-9.33</td><td></td><td>33.24</td><td>32.20</td><td>11.53</td><td>33.67</td><td>1.37</td><td>100</td><td></td><td>147 Average</td></tr></table>								Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2163.00	52.50	74.00	-21.50		41.42	26.40	7.70	32.44	9.42	121		3 Peak	2	2163.00	41.67	54.00	-12.33		30.59	26.40	7.70	32.44	9.42	121		3 Average	3	2651.00	54.50	74.00	-19.50		41.06	27.49	8.34	32.68	9.49	117		18 Peak	4	2651.00	48.34	54.00	-5.66		35.70	27.49	8.34	32.68	9.49	117		18 Average	5	4824.00	49.31	74.00	-24.69		37.88	32.20	11.53	33.67	1.37	100		147 Peak	6	4824.00	44.67	54.00	-9.33		33.24	32.20	11.53	33.67	1.37	100		147 Average	Level (dBuV/m) Date: 2025-06-25 Site : 03CH22-HY Condition: PEAK_74 3m DRH18-E_LE2C04A18EN_250520 VERTICAL <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2166.00</td><td>52.19</td><td>74.00</td><td>-21.81</td><td></td><td>41.10</td><td>26.40</td><td>7.71</td><td>32.44</td><td>9.42</td><td>150</td><td></td><td>31 Peak</td></tr><tr><td>2</td><td>2166.00</td><td>41.77</td><td>54.00</td><td>-12.23</td><td></td><td>30.68</td><td>26.40</td><td>7.71</td><td>32.44</td><td>9.42</td><td>150</td><td></td><td>31 Average</td></tr><tr><td>3</td><td>2651.00</td><td>55.28</td><td>74.00</td><td>-18.72</td><td></td><td>42.64</td><td>27.49</td><td>8.34</td><td>32.68</td><td>9.49</td><td>157</td><td></td><td>41 Peak</td></tr><tr><td>4</td><td>2651.00</td><td>47.92</td><td>54.00</td><td>-6.08</td><td></td><td>35.28</td><td>27.49</td><td>8.34</td><td>32.68</td><td>9.49</td><td>157</td><td></td><td>41 Average</td></tr><tr><td>5</td><td>4824.00</td><td>49.07</td><td>74.00</td><td>-24.93</td><td></td><td>37.64</td><td>32.20</td><td>11.53</td><td>33.67</td><td>1.37</td><td>321</td><td></td><td>178 Peak</td></tr><tr><td>6</td><td>4824.00</td><td>43.67</td><td>54.00</td><td>-10.33</td><td></td><td>32.24</td><td>32.20</td><td>11.53</td><td>33.67</td><td>1.37</td><td>321</td><td></td><td>178 Average</td></tr></table>								Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2166.00	52.19	74.00	-21.81		41.10	26.40	7.71	32.44	9.42	150		31 Peak	2	2166.00	41.77	54.00	-12.23		30.68	26.40	7.71	32.44	9.42	150		31 Average	3	2651.00	55.28	74.00	-18.72		42.64	27.49	8.34	32.68	9.49	157		41 Peak	4	2651.00	47.92	54.00	-6.08		35.28	27.49	8.34	32.68	9.49	157		41 Average	5	4824.00	49.07	74.00	-24.93		37.64	32.20	11.53	33.67	1.37	321		178 Peak	6	4824.00	43.67	54.00	-10.33		32.24	32.20	11.53	33.67	1.37	321		178 Average
		Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																																																
		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																																																																																	
1	2163.00	52.50	74.00	-21.50		41.42	26.40	7.70	32.44	9.42	121		3 Peak																																																																																																																																																																																																																																	
2	2163.00	41.67	54.00	-12.33		30.59	26.40	7.70	32.44	9.42	121		3 Average																																																																																																																																																																																																																																	
3	2651.00	54.50	74.00	-19.50		41.06	27.49	8.34	32.68	9.49	117		18 Peak																																																																																																																																																																																																																																	
4	2651.00	48.34	54.00	-5.66		35.70	27.49	8.34	32.68	9.49	117		18 Average																																																																																																																																																																																																																																	
5	4824.00	49.31	74.00	-24.69		37.88	32.20	11.53	33.67	1.37	100		147 Peak																																																																																																																																																																																																																																	
6	4824.00	44.67	54.00	-9.33		33.24	32.20	11.53	33.67	1.37	100		147 Average																																																																																																																																																																																																																																	
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																																																																																		
1	2166.00	52.19	74.00	-21.81		41.10	26.40	7.71	32.44	9.42	150		31 Peak																																																																																																																																																																																																																																	
2	2166.00	41.77	54.00	-12.23		30.68	26.40	7.71	32.44	9.42	150		31 Average																																																																																																																																																																																																																																	
3	2651.00	55.28	74.00	-18.72		42.64	27.49	8.34	32.68	9.49	157		41 Peak																																																																																																																																																																																																																																	
4	2651.00	47.92	54.00	-6.08		35.28	27.49	8.34	32.68	9.49	157		41 Average																																																																																																																																																																																																																																	
5	4824.00	49.07	74.00	-24.93		37.64	32.20	11.53	33.67	1.37	321		178 Peak																																																																																																																																																																																																																																	
6	4824.00	43.67	54.00	-10.33		32.24	32.20	11.53	33.67	1.37	321		178 Average																																																																																																																																																																																																																																	

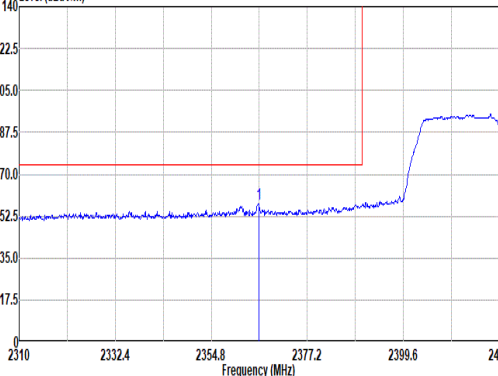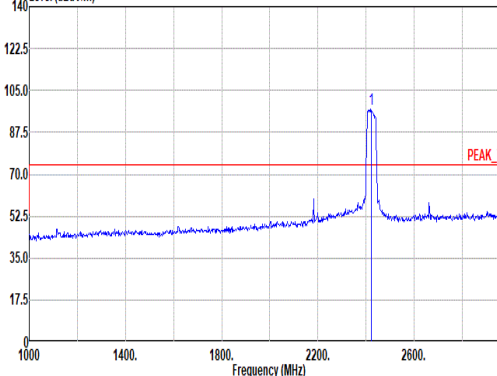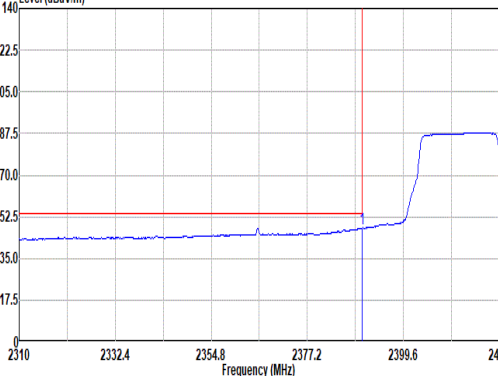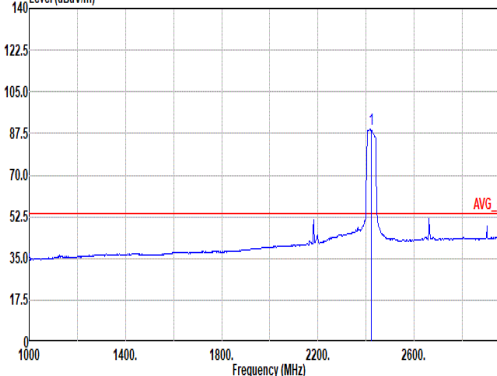

Mode	11																																																																																								
	Band Edge - L																																																																																								
	2400-2483.5_802.11n_HT40_CH03_2422MHz																																																																																								
ANT	1																																																																																								
Pol.	Horizontal						Fundamental																																																																																		
Peak	Level (dBuV/m) Date: 2025-06-20 						Level (dBuV/m) Date: 2025-06-20 																																																																																		
	Site : 03CH22-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2365.89</td><td>57.70</td><td>74.00</td><td>-16.30</td><td>45.91</td><td>26.90</td><td>8.03</td><td>32.57</td><td>9.43</td><td>100</td><td>165</td><td>Peak</td></tr></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2365.89	57.70	74.00	-16.30	45.91	26.90	8.03	32.57	9.43	100	165	Peak	Site : 03CH22-HY Condition: PEAK_74 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2422.00</td><td>96.98</td><td>-----</td><td>-----</td><td>85.25</td><td>26.80</td><td>8.10</td><td>32.61</td><td>9.44</td><td>100</td><td>165</td><td>Peak</td></tr></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2422.00	96.98	-----	-----	85.25	26.80	8.10	32.61	9.44	100	165
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1	2365.89	57.70	74.00	-16.30	45.91	26.90	8.03	32.57	9.43	100	165	Peak																																																																													
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1	2422.00	96.98	-----	-----	85.25	26.80	8.10	32.61	9.44	100	165	Peak																																																																													
Avg	Level (dBuV/m) Date: 2025-06-20 						Level (dBuV/m) Date: 2025-06-20 																																																																																		
	Site : 03CH22-HY Condition: AVG_BE_54 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL : RBW:1000.000kHz VBW:1.200kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2389.97</td><td>47.79</td><td>54.00</td><td>-6.21</td><td>36.28</td><td>26.60</td><td>8.06</td><td>32.59</td><td>9.44</td><td>100</td><td>165</td><td>Average</td></tr></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2389.97	47.79	54.00	-6.21	36.28	26.60	8.06	32.59	9.44	100	165	Average	Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL : RBW:1000.000kHz VBW:1.200kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2422.00</td><td>89.21</td><td>-----</td><td>-----</td><td>77.48</td><td>26.80</td><td>8.10</td><td>32.61</td><td>9.44</td><td>100</td><td>165</td><td>Average</td></tr></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2422.00	89.21	-----	-----	77.48	26.80	8.10	32.61	9.44	100	165
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1	2389.97	47.79	54.00	-6.21	36.28	26.60	8.06	32.59	9.44	100	165	Average																																																																													
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1	2422.00	89.21	-----	-----	77.48	26.80	8.10	32.61	9.44	100	165	Average																																																																													



Mode	11																																					
	Band Edge - R																																					
	2400-2483.5_802.11n HT40_CH03_2422MHz																																					
ANT	1																																					
Pol.	Horizontal	Fundamental																																				
Peak	Date: 2025-06-20 Site : 03CH22-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2489.63</td><td>51.83</td><td>74.00</td><td>-22.17</td><td>40.03</td><td>26.00</td><td>8.19</td><td>32.65</td><td>9.46</td><td>100</td><td>165</td><td>Peak</td></tr></table>	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2489.63	51.83	74.00	-22.17	40.03	26.00	8.19	32.65	9.46	100	165	Peak	Blank
Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																												
1 2489.63	51.83	74.00	-22.17	40.03	26.00	8.19	32.65	9.46	100	165	Peak																											
Avg	Date: 2025-06-20 Site : 03CH22-HY Condition: AVG_BE_54 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL : RBW:1000.000kHz VBW:1.200kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2487.05</td><td>41.44</td><td>54.00</td><td>-12.56</td><td>29.68</td><td>26.77</td><td>8.18</td><td>32.65</td><td>9.46</td><td>100</td><td>165</td><td>Average</td></tr></table>	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2487.05	41.44	54.00	-12.56	29.68	26.77	8.18	32.65	9.46	100	165	Average	Blank
Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																												
1 2487.05	41.44	54.00	-12.56	29.68	26.77	8.18	32.65	9.46	100	165	Average																											





Mode	11																																																																																																			
	Band Edge - L																																																																																																			
	2400-2483.5_802.11n HT40_CH03_2422MHz																																																																																																			
ANT	1																																																																																																			
Pol.	Vertical						Fundamental																																																																																													
Peak	Level (dBuV/m) Date: 2025-06-20 23102332.42354.82377.22399.62422 Frequency (MHz) Site : 03CH22-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C04A18EN_250520 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2388.62</td><td>56.45</td><td>74.00</td><td>-17.55</td><td>44.93</td><td>26.61</td><td>8.06</td><td>32.59</td><td>9.44</td><td>300</td><td>119</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2388.62	56.45	74.00	-17.55	44.93	26.61	8.06	32.59	9.44	300	119	Peak	Level (dBuV/m) Date: 2025-06-20 10001400.1800.2200.2600.3000 Frequency (MHz) Site : 03CH22-HY Condition: PEAK_74 3m DRH18-E_LE2C04A18EN_250520 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2422.00</td><td>95.43</td><td>-----</td><td>-----</td><td>83.70</td><td>26.80</td><td>8.10</td><td>32.61</td><td>9.44</td><td>300</td><td>119</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2422.00	95.43	-----	-----	83.70	26.80	8.10	32.61	9.44	300	119	Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2388.62	56.45	74.00	-17.55	44.93	26.61	8.06	32.59	9.44	300	119	Peak																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2422.00	95.43	-----	-----	83.70	26.80	8.10	32.61	9.44	300	119	Peak																																																																																								
Avg	Level (dBuV/m) Date: 2025-06-20 23102332.42354.82377.22399.62422 Frequency (MHz) Site : 03CH22-HY Condition: AVG_BE_54 3m DRH18-E_LE2C04A18EN_250520 VERTICAL : RBW:1000.000kHz VBW:1.200kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2385.71</td><td>46.71</td><td>54.00</td><td>-7.29</td><td>35.15</td><td>26.64</td><td>8.06</td><td>32.58</td><td>9.44</td><td>300</td><td>119</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2385.71	46.71	54.00	-7.29	35.15	26.64	8.06	32.58	9.44	300	119	Average	Level (dBuV/m) Date: 2025-06-20 10001400.1800.2200.2600.3000 Frequency (MHz) Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_250520 VERTICAL : RBW:1000.000kHz VBW:1.200kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2422.00</td><td>87.65</td><td>-----</td><td>-----</td><td>75.92</td><td>26.80</td><td>8.10</td><td>32.61</td><td>9.44</td><td>300</td><td>119</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2422.00	87.65	-----	-----	75.92	26.80	8.10	32.61	9.44	300	119	Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2385.71	46.71	54.00	-7.29	35.15	26.64	8.06	32.58	9.44	300	119	Average																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2422.00	87.65	-----	-----	75.92	26.80	8.10	32.61	9.44	300	119	Average																																																																																								







Mode	11	
	Band Edge - R	
	2400-2483.5_802.11n HT40_CH03_2422MHz	
ANT	1	
Pol.	Vertical	Fundamental
Peak		

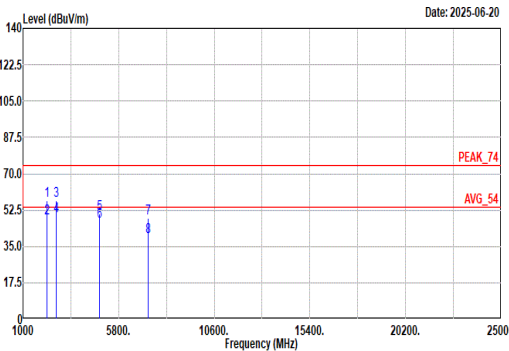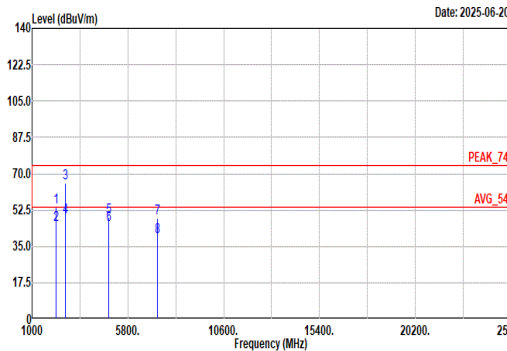

Mode	11																																																																																																																																																								
	Harmonic																																																																																																																																																								
	2400-2483.5_802.11n HT40_CH03_2422MHz																																																																																																																																																								
ANT	1																																																																																																																																																								
Pol.	Horizontal							Vertical																																																																																																																																																	
Peak Avg																																																																																																																																																									
	Site : 03CH22-HY Condition: PEAK_74 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL																																																																																																																																																								
	<table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2200.00</td><td>57.25</td><td>74.00</td><td>-16.75</td><td>46.03</td><td>26.50</td><td>7.77</td><td>32.46</td><td>9.41</td><td>140</td><td>168</td><td>Peak</td><td></td></tr><tr><td>2</td><td>2200.00</td><td>48.61</td><td>54.00</td><td>-5.39</td><td>37.39</td><td>26.50</td><td>7.77</td><td>32.46</td><td>9.41</td><td>140</td><td>168</td><td>Average</td><td></td></tr><tr><td>3</td><td>2661.00</td><td>57.32</td><td>74.00</td><td>-16.68</td><td>44.75</td><td>27.40</td><td>8.36</td><td>32.68</td><td>9.49</td><td>139</td><td>171</td><td>Peak</td><td></td></tr><tr><td>4</td><td>2661.00</td><td>49.82</td><td>54.00</td><td>-4.18</td><td>37.25</td><td>27.40</td><td>8.36</td><td>32.68</td><td>9.49</td><td>139</td><td>171</td><td>Average</td><td></td></tr><tr><td>5</td><td>4844.00</td><td>50.53</td><td>74.00</td><td>-23.47</td><td>39.11</td><td>32.20</td><td>11.56</td><td>33.67</td><td>1.33</td><td>106</td><td>144</td><td>Peak</td><td></td></tr><tr><td>6</td><td>4844.00</td><td>46.93</td><td>54.00</td><td>-7.07</td><td>35.51</td><td>32.20</td><td>11.56</td><td>33.67</td><td>1.33</td><td>106</td><td>144</td><td>Average</td><td></td></tr><tr><td>7</td><td>7266.00</td><td>48.71</td><td>74.00</td><td>-25.29</td><td>32.89</td><td>37.06</td><td>14.29</td><td>36.52</td><td>0.99</td><td>--</td><td>--</td><td>Peak</td><td></td></tr><tr><td>8</td><td>7266.00</td><td>39.67</td><td>54.00</td><td>-14.33</td><td>23.85</td><td>37.06</td><td>14.29</td><td>36.52</td><td>0.99</td><td>--</td><td>--</td><td>Average</td><td></td></tr></table>															Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg		1	2200.00	57.25	74.00	-16.75	46.03	26.50	7.77	32.46	9.41	140	168	Peak		2	2200.00	48.61	54.00	-5.39	37.39	26.50	7.77	32.46	9.41	140	168	Average		3	2661.00	57.32	74.00	-16.68	44.75	27.40	8.36	32.68	9.49	139	171	Peak		4	2661.00	49.82	54.00	-4.18	37.25	27.40	8.36	32.68	9.49	139	171	Average		5	4844.00	50.53	74.00	-23.47	39.11	32.20	11.56	33.67	1.33	106	144	Peak		6	4844.00	46.93	54.00	-7.07	35.51	32.20	11.56	33.67	1.33	106	144	Average		7	7266.00	48.71	74.00	-25.29	32.89	37.06	14.29	36.52	0.99	--	--	Peak		8	7266.00	39.67	54.00	-14.33	23.85	37.06	14.29	36.52	0.99	--	--	Average
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																																																																													
1	2200.00	57.25	74.00	-16.75	46.03	26.50	7.77	32.46	9.41	140	168	Peak																																																																																																																																													
2	2200.00	48.61	54.00	-5.39	37.39	26.50	7.77	32.46	9.41	140	168	Average																																																																																																																																													
3	2661.00	57.32	74.00	-16.68	44.75	27.40	8.36	32.68	9.49	139	171	Peak																																																																																																																																													
4	2661.00	49.82	54.00	-4.18	37.25	27.40	8.36	32.68	9.49	139	171	Average																																																																																																																																													
5	4844.00	50.53	74.00	-23.47	39.11	32.20	11.56	33.67	1.33	106	144	Peak																																																																																																																																													
6	4844.00	46.93	54.00	-7.07	35.51	32.20	11.56	33.67	1.33	106	144	Average																																																																																																																																													
7	7266.00	48.71	74.00	-25.29	32.89	37.06	14.29	36.52	0.99	--	--	Peak																																																																																																																																													
8	7266.00	39.67	54.00	-14.33	23.85	37.06	14.29	36.52	0.99	--	--	Average																																																																																																																																													
Site : 03CH22-HY Condition: PEAK_74 3m DRH18-E_LE2C04A18EN_250520 VERTICAL																																																																																																																																																									
<table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2200.00</td><td>53.77</td><td>74.00</td><td>-20.23</td><td>42.55</td><td>26.50</td><td>7.77</td><td>32.46</td><td>9.41</td><td>203</td><td>154</td><td>Peak</td><td></td></tr><tr><td>2</td><td>2200.00</td><td>45.33</td><td>54.00</td><td>-8.67</td><td>34.11</td><td>26.50</td><td>7.77</td><td>32.46</td><td>9.41</td><td>203</td><td>154</td><td>Average</td><td></td></tr><tr><td>3</td><td>2661.00</td><td>65.38</td><td>74.00</td><td>-8.62</td><td>52.81</td><td>27.40</td><td>8.36</td><td>32.68</td><td>9.49</td><td>335</td><td>106</td><td>Peak</td><td></td></tr><tr><td>4</td><td>2661.00</td><td>48.93</td><td>54.00</td><td>-5.07</td><td>36.36</td><td>27.40</td><td>8.36</td><td>32.68</td><td>9.49</td><td>335</td><td>106</td><td>Average</td><td></td></tr><tr><td>5</td><td>4844.00</td><td>49.18</td><td>74.00</td><td>-24.82</td><td>37.76</td><td>32.20</td><td>11.56</td><td>33.67</td><td>1.33</td><td>400</td><td>183</td><td>Peak</td><td></td></tr><tr><td>6</td><td>4844.00</td><td>45.28</td><td>54.00</td><td>-8.72</td><td>33.06</td><td>32.20</td><td>11.56</td><td>33.67</td><td>1.33</td><td>400</td><td>183</td><td>Average</td><td></td></tr><tr><td>7</td><td>7266.00</td><td>48.52</td><td>74.00</td><td>-25.48</td><td>32.70</td><td>37.06</td><td>14.29</td><td>36.52</td><td>0.99</td><td>--</td><td>--</td><td>Peak</td><td></td></tr><tr><td>8</td><td>7266.00</td><td>39.49</td><td>54.00</td><td>-14.51</td><td>23.67</td><td>37.06</td><td>14.29</td><td>36.52</td><td>0.99</td><td>--</td><td>--</td><td>Average</td><td></td></tr></table>															Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg		1	2200.00	53.77	74.00	-20.23	42.55	26.50	7.77	32.46	9.41	203	154	Peak		2	2200.00	45.33	54.00	-8.67	34.11	26.50	7.77	32.46	9.41	203	154	Average		3	2661.00	65.38	74.00	-8.62	52.81	27.40	8.36	32.68	9.49	335	106	Peak		4	2661.00	48.93	54.00	-5.07	36.36	27.40	8.36	32.68	9.49	335	106	Average		5	4844.00	49.18	74.00	-24.82	37.76	32.20	11.56	33.67	1.33	400	183	Peak		6	4844.00	45.28	54.00	-8.72	33.06	32.20	11.56	33.67	1.33	400	183	Average		7	7266.00	48.52	74.00	-25.48	32.70	37.06	14.29	36.52	0.99	--	--	Peak		8	7266.00	39.49	54.00	-14.51	23.67	37.06	14.29	36.52	0.99	--	--	Average	
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																																																																													
1	2200.00	53.77	74.00	-20.23	42.55	26.50	7.77	32.46	9.41	203	154	Peak																																																																																																																																													
2	2200.00	45.33	54.00	-8.67	34.11	26.50	7.77	32.46	9.41	203	154	Average																																																																																																																																													
3	2661.00	65.38	74.00	-8.62	52.81	27.40	8.36	32.68	9.49	335	106	Peak																																																																																																																																													
4	2661.00	48.93	54.00	-5.07	36.36	27.40	8.36	32.68	9.49	335	106	Average																																																																																																																																													
5	4844.00	49.18	74.00	-24.82	37.76	32.20	11.56	33.67	1.33	400	183	Peak																																																																																																																																													
6	4844.00	45.28	54.00	-8.72	33.06	32.20	11.56	33.67	1.33	400	183	Average																																																																																																																																													
7	7266.00	48.52	74.00	-25.48	32.70	37.06	14.29	36.52	0.99	--	--	Peak																																																																																																																																													
8	7266.00	39.49	54.00	-14.51	23.67	37.06	14.29	36.52	0.99	--	--	Average																																																																																																																																													

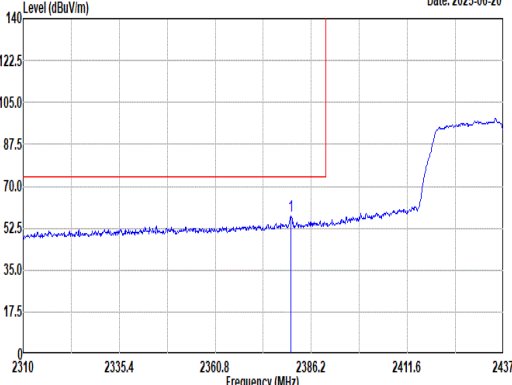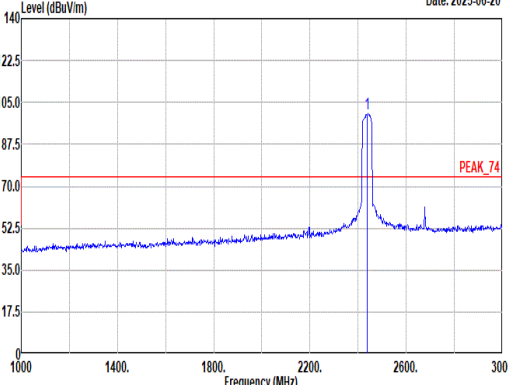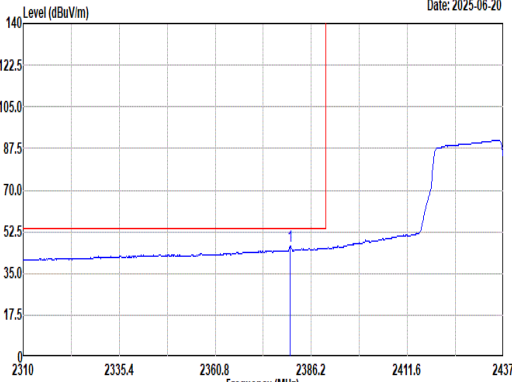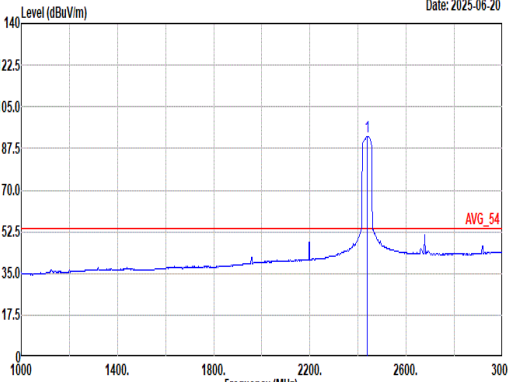

Mode	12																																																																																																			
	Band Edge - L																																																																																																			
	2400-2483.5_802.11n HT40_CH06_2437MHz																																																																																																			
ANT	1																																																																																																			
Pol.	Horizontal						Fundamental																																																																																													
Peak	Level (dBuV/m) Date: 2025-06-20  Site : 03CH22-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2380.74</td><td>57.44</td><td>74.00</td><td>-16.56</td><td>45.84</td><td>26.69</td><td>8.05</td><td>32.58</td><td>9.44</td><td>136</td><td>158</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2380.74	57.44	74.00	-16.56	45.84	26.69	8.05	32.58	9.44	136	158	Peak	Level (dBuV/m) Date: 2025-06-20  Site : 03CH22-HY Condition: PEAK_74 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2437.00</td><td>100.22</td><td>-----</td><td>-----</td><td>80.54</td><td>26.72</td><td>8.13</td><td>32.62</td><td>9.45</td><td>136</td><td>158</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2437.00	100.22	-----	-----	80.54	26.72	8.13	32.62	9.45	136	158	Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2380.74	57.44	74.00	-16.56	45.84	26.69	8.05	32.58	9.44	136	158	Peak																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2437.00	100.22	-----	-----	80.54	26.72	8.13	32.62	9.45	136	158	Peak																																																																																								
Avg	Level (dBuV/m) Date: 2025-06-20  Site : 03CH22-HY Condition: AVG_BE_54 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL : RBW:1000.000kHz VBW:1.200kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2380.61</td><td>46.73</td><td>54.00</td><td>-7.27</td><td>35.13</td><td>26.69</td><td>8.05</td><td>32.58</td><td>9.44</td><td>136</td><td>158</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2380.61	46.73	54.00	-7.27	35.13	26.69	8.05	32.58	9.44	136	158	Average	Level (dBuV/m) Date: 2025-06-20  Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL : RBW:1000.000kHz VBW:1.200kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2437.00</td><td>92.62</td><td>-----</td><td>-----</td><td>80.96</td><td>26.70</td><td>8.13</td><td>32.62</td><td>9.45</td><td>136</td><td>158</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2437.00	92.62	-----	-----	80.96	26.70	8.13	32.62	9.45	136	158	Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2380.61	46.73	54.00	-7.27	35.13	26.69	8.05	32.58	9.44	136	158	Average																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2437.00	92.62	-----	-----	80.96	26.70	8.13	32.62	9.45	136	158	Average																																																																																								



Mode	12	
	Band Edge - R	
	2400-2483.5_802.11n HT40_CH06_2437MHz	
ANT	1	
Pol.	Horizontal	Fundamental
Peak		



Mode	12									
	Band Edge - L									
	2400-2483.5_802.11n HT40_CH06_2437MHz									
ANT	1									
Pol.	Vertical					Fundamental				
Peak	Level (dBuV/m) Date: 2025-06-20 <									







Mode	12																																					
	Band Edge - R																																					
	2400-2483.5_802.11n HT40_CH06_2437MHz																																					
ANT	1																																					
Pol.	Vertical	Fundamental																																				
Peak	Date: 2025-06-20 Site : 03CH22-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C04A18EN_250520 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2493.07</td><td>55.80</td><td>74.00</td><td>-18.20</td><td>44.01</td><td>26.00</td><td>8.19</td><td>32.66</td><td>9.46</td><td>308</td><td>96</td><td>Peak</td></tr></table>	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2493.07	55.80	74.00	-18.20	44.01	26.00	8.19	32.66	9.46	308	96	Peak	Blank
Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																												
1 2493.07	55.80	74.00	-18.20	44.01	26.00	8.19	32.66	9.46	308	96	Peak																											
Avg	Date: 2025-06-20 Site : 03CH22-HY Condition: AVG_BE_54 3m DRH18-E_LE2C04A18EN_250520 VERTICAL : RBW:1000.000kHz VBW:1.200kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2493.13</td><td>45.04</td><td>54.00</td><td>-8.96</td><td>33.25</td><td>26.00</td><td>8.19</td><td>32.66</td><td>9.46</td><td>308</td><td>96</td><td>Average</td></tr></table>	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2493.13	45.04	54.00	-8.96	33.25	26.00	8.19	32.66	9.46	308	96	Average	Blank
Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																												
1 2493.13	45.04	54.00	-8.96	33.25	26.00	8.19	32.66	9.46	308	96	Average																											



Mode	12																																																																																																																																																																																																									
	Harmonic																																																																																																																																																																																																									
	2400-2483.5_802.11n HT40_CH06_2437MHz																																																																																																																																																																																																									
ANT	1																																																																																																																																																																																																									
Pol.	Horizontal	Vertical																																																																																																																																																																																																								
Peak Avg	Level (dBuV/m) Date: 2025-06-20 Site : 03CH22-HY Condition: PEAK_74 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2214.00</td><td>57.39</td><td>74.00</td><td>-16.61</td><td>46.06</td><td>26.60</td><td>7.79</td><td>32.47</td><td>9.41</td><td>166 167 Peak</td></tr><tr><td>2 2214.00</td><td>49.12</td><td>54.00</td><td>-4.88</td><td>37.79</td><td>26.60</td><td>7.79</td><td>32.47</td><td>9.41</td><td>166 167 Average</td></tr><tr><td>3 2676.00</td><td>55.35</td><td>74.00</td><td>-18.65</td><td>42.70</td><td>27.46</td><td>8.38</td><td>32.68</td><td>9.49</td><td>112 171 Peak</td></tr><tr><td>4 2676.00</td><td>49.33</td><td>54.00</td><td>-4.67</td><td>36.68</td><td>27.46</td><td>8.38</td><td>32.68</td><td>9.49</td><td>112 171 Average</td></tr><tr><td>5 4874.00</td><td>46.73</td><td>74.00</td><td>-27.27</td><td>35.24</td><td>32.30</td><td>11.60</td><td>33.67</td><td>1.26</td><td>-- -- Peak</td></tr><tr><td>6 7311.00</td><td>49.53</td><td>74.00</td><td>-24.47</td><td>33.64</td><td>37.20</td><td>14.28</td><td>36.59</td><td>1.00</td><td>-- -- Peak</td></tr><tr><td>7 7311.00</td><td>39.41</td><td>54.00</td><td>-14.59</td><td>23.52</td><td>37.20</td><td>14.28</td><td>36.59</td><td>1.00</td><td>-- -- Average</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor				MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 2214.00	57.39	74.00	-16.61	46.06	26.60	7.79	32.47	9.41	166 167 Peak	2 2214.00	49.12	54.00	-4.88	37.79	26.60	7.79	32.47	9.41	166 167 Average	3 2676.00	55.35	74.00	-18.65	42.70	27.46	8.38	32.68	9.49	112 171 Peak	4 2676.00	49.33	54.00	-4.67	36.68	27.46	8.38	32.68	9.49	112 171 Average	5 4874.00	46.73	74.00	-27.27	35.24	32.30	11.60	33.67	1.26	-- -- Peak	6 7311.00	49.53	74.00	-24.47	33.64	37.20	14.28	36.59	1.00	-- -- Peak	7 7311.00	39.41	54.00	-14.59	23.52	37.20	14.28	36.59	1.00	-- -- Average	Level (dBuV/m) Date: 2025-06-20 Site : 03CH22-HY Condition: PEAK_74 3m DRH18-E_LE2C04A18EN_250520 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2214.00</td><td>54.62</td><td>74.00</td><td>-19.38</td><td>43.29</td><td>26.60</td><td>7.79</td><td>32.47</td><td>9.41</td><td>114 174 Peak</td></tr><tr><td>2 2214.00</td><td>45.72</td><td>54.00</td><td>-8.28</td><td>34.39</td><td>26.60</td><td>7.79</td><td>32.47</td><td>9.41</td><td>114 174 Average</td></tr><tr><td>3 2676.00</td><td>55.14</td><td>74.00</td><td>-18.86</td><td>42.49</td><td>27.46</td><td>8.38</td><td>32.68</td><td>9.49</td><td>335 106 Peak</td></tr><tr><td>4 2676.00</td><td>48.16</td><td>54.00</td><td>-5.84</td><td>35.51</td><td>27.46</td><td>8.38</td><td>32.68</td><td>9.49</td><td>335 106 Average</td></tr><tr><td>5 4874.00</td><td>46.91</td><td>74.00</td><td>-27.09</td><td>35.42</td><td>32.30</td><td>11.60</td><td>33.67</td><td>1.26</td><td>-- -- Peak</td></tr><tr><td>6 7311.00</td><td>48.66</td><td>74.00</td><td>-25.34</td><td>32.77</td><td>37.20</td><td>14.28</td><td>36.59</td><td>1.00</td><td>-- -- Peak</td></tr><tr><td>7 7311.00</td><td>39.27</td><td>54.00</td><td>-14.73</td><td>23.38</td><td>37.20</td><td>14.28</td><td>36.59</td><td>1.00</td><td>-- -- Average</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor				MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 2214.00	54.62	74.00	-19.38	43.29	26.60	7.79	32.47	9.41	114 174 Peak	2 2214.00	45.72	54.00	-8.28	34.39	26.60	7.79	32.47	9.41	114 174 Average	3 2676.00	55.14	74.00	-18.86	42.49	27.46	8.38	32.68	9.49	335 106 Peak	4 2676.00	48.16	54.00	-5.84	35.51	27.46	8.38	32.68	9.49	335 106 Average	5 4874.00	46.91	74.00	-27.09	35.42	32.30	11.60	33.67	1.26	-- -- Peak	6 7311.00	48.66	74.00	-25.34	32.77	37.20	14.28	36.59	1.00	-- -- Peak	7 7311.00	39.27	54.00	-14.73	23.38	37.20	14.28	36.59	1.00	-- -- Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																																																																																																				
MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																																																	
1 2214.00	57.39	74.00	-16.61	46.06	26.60	7.79	32.47	9.41	166 167 Peak																																																																																																																																																																																																	
2 2214.00	49.12	54.00	-4.88	37.79	26.60	7.79	32.47	9.41	166 167 Average																																																																																																																																																																																																	
3 2676.00	55.35	74.00	-18.65	42.70	27.46	8.38	32.68	9.49	112 171 Peak																																																																																																																																																																																																	
4 2676.00	49.33	54.00	-4.67	36.68	27.46	8.38	32.68	9.49	112 171 Average																																																																																																																																																																																																	
5 4874.00	46.73	74.00	-27.27	35.24	32.30	11.60	33.67	1.26	-- -- Peak																																																																																																																																																																																																	
6 7311.00	49.53	74.00	-24.47	33.64	37.20	14.28	36.59	1.00	-- -- Peak																																																																																																																																																																																																	
7 7311.00	39.41	54.00	-14.59	23.52	37.20	14.28	36.59	1.00	-- -- Average																																																																																																																																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																	
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																																																																																																				
MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																																																	
1 2214.00	54.62	74.00	-19.38	43.29	26.60	7.79	32.47	9.41	114 174 Peak																																																																																																																																																																																																	
2 2214.00	45.72	54.00	-8.28	34.39	26.60	7.79	32.47	9.41	114 174 Average																																																																																																																																																																																																	
3 2676.00	55.14	74.00	-18.86	42.49	27.46	8.38	32.68	9.49	335 106 Peak																																																																																																																																																																																																	
4 2676.00	48.16	54.00	-5.84	35.51	27.46	8.38	32.68	9.49	335 106 Average																																																																																																																																																																																																	
5 4874.00	46.91	74.00	-27.09	35.42	32.30	11.60	33.67	1.26	-- -- Peak																																																																																																																																																																																																	
6 7311.00	48.66	74.00	-25.34	32.77	37.20	14.28	36.59	1.00	-- -- Peak																																																																																																																																																																																																	
7 7311.00	39.27	54.00	-14.73	23.38	37.20	14.28	36.59	1.00	-- -- Average																																																																																																																																																																																																	

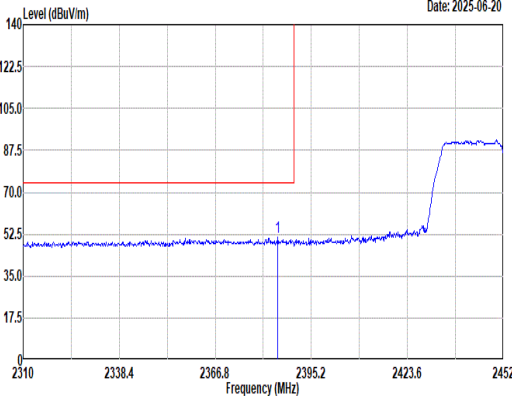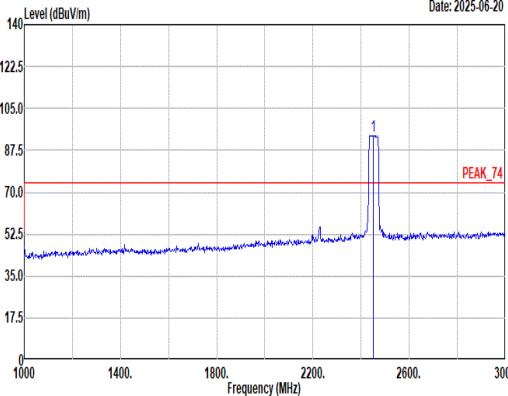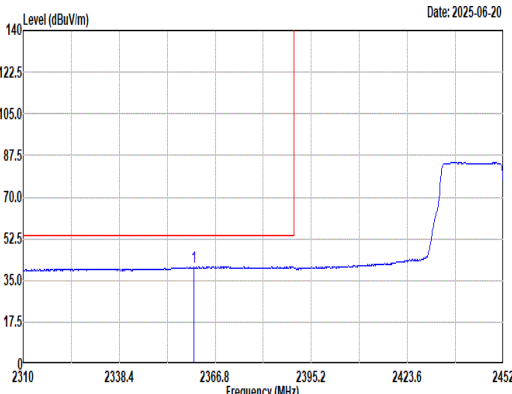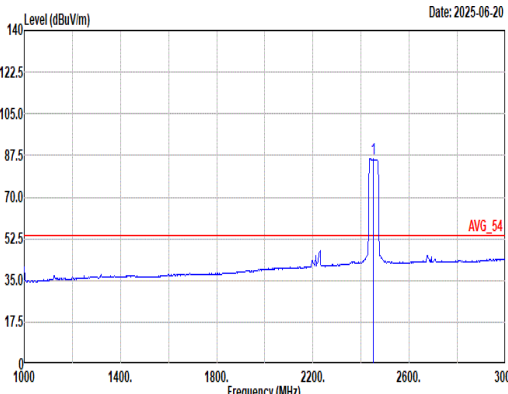

Mode	13																																																																																																	
	Band Edge - L																																																																																																	
	2400-2483.5_802.11n_HT40_CH09_2452MHz																																																																																																	
ANT	1																																																																																																	
Pol.	Horizontal						Fundamental																																																																																											
Peak	 Site : 03CH22-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2385.26</td><td>51.24</td><td>74.00</td><td>-22.76</td><td>39.67</td><td>26.65</td><td>8.06</td><td>32.58</td><td>9.44</td><td>127</td><td>161</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	2385.26	51.24	74.00	-22.76	39.67	26.65	8.06	32.58	9.44	127	161	Peak	 Site : 03CH22-HY Condition: PEAK_74 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2452.00</td><td>93.75</td><td>-----</td><td>-----</td><td>82.02</td><td>26.76</td><td>8.14</td><td>32.62</td><td>9.45</td><td>127</td><td>161</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	2452.00	93.75	-----	-----	82.02	26.76	8.14	32.62	9.45	127	161	Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																																									
1	2385.26	51.24	74.00	-22.76	39.67	26.65	8.06	32.58	9.44	127	161	Peak																																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																																									
1	2452.00	93.75	-----	-----	82.02	26.76	8.14	32.62	9.45	127	161	Peak																																																																																						
Avg	 Site : 03CH22-HY Condition: AVG_BE_54 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL : RBW:1000.000kHz VBW:1.200kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2360.55</td><td>40.68</td><td>54.00</td><td>-13.32</td><td>28.90</td><td>26.90</td><td>8.02</td><td>32.57</td><td>9.43</td><td>127</td><td>161</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	2360.55	40.68	54.00	-13.32	28.90	26.90	8.02	32.57	9.43	127	161	Average	 Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL : RBW:1000.000kHz VBW:1.200kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2452.00</td><td>85.98</td><td>-----</td><td>-----</td><td>74.34</td><td>26.68</td><td>8.13</td><td>32.62</td><td>9.45</td><td>127</td><td>161</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	2452.00	85.98	-----	-----	74.34	26.68	8.13	32.62	9.45	127	161	Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																																									
1	2360.55	40.68	54.00	-13.32	28.90	26.90	8.02	32.57	9.43	127	161	Average																																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																																									
1	2452.00	85.98	-----	-----	74.34	26.68	8.13	32.62	9.45	127	161	Average																																																																																						



Mode	13																																																							
	Band Edge - R																																																							
	2400-2483.5_802.11n HT40_CH09_2452MHz																																																							
ANT	1																																																							
Pol.	Horizontal						Fundamental																																																	
Peak	Level (dBuV/m) Date: 2025-06-20 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 2452 2461.6 2471.2 2480.8 2490.4 2500 Frequency (MHz) PEAK_BE_74 Site : 03CH22-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2487.06</td><td>52.67</td><td>74.00</td><td>-21.33</td><td>40.89</td><td>26.78</td><td>8.19</td><td>32.65</td><td>9.46</td><td>127</td><td>161</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2487.06	52.67	74.00	-21.33	40.89	26.78	8.19	32.65	9.46	127	161	Peak	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		Remark																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	2487.06	52.67	74.00	-21.33	40.89	26.78	8.19	32.65	9.46	127	161	Peak																																												
Avg	Level (dBuV/m) Date: 2025-06-20 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 2452 2461.6 2471.2 2480.8 2490.4 2500 Frequency (MHz) AVG_BE_54 Site : 03CH22-HY Condition: AVG_BE_54 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL : RBW:1000.000kHz VBW:1.200kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2484.30</td><td>42.67</td><td>54.00</td><td>-11.33</td><td>30.94</td><td>26.74</td><td>8.18</td><td>32.65</td><td>9.46</td><td>127</td><td>161</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2484.30	42.67	54.00	-11.33	30.94	26.74	8.18	32.65	9.46	127	161	Average	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		Remark																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	2484.30	42.67	54.00	-11.33	30.94	26.74	8.18	32.65	9.46	127	161	Average																																												



Mode	13																																																																																																			
	Band Edge - L																																																																																																			
	2400-2483.5_802.11n HT40_CH09_2452MHz																																																																																																			
ANT	1																																																																																																			
Pol.	Vertical						Fundamental																																																																																													
Peak	Level (dBuV/m) Date: 2025-06-20 Site : 03CH22-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C04A18EN_250520 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2300.72</td><td>50.43</td><td>74.00</td><td>-23.57</td><td>38.83</td><td>26.69</td><td>8.05</td><td>32.58</td><td>9.44</td><td>200</td><td>100</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2300.72	50.43	74.00	-23.57	38.83	26.69	8.05	32.58	9.44	200	100	Peak	Level (dBuV/m) Date: 2025-06-20 Site : 03CH22-HY Condition: PEAK_74 3m DRH18-E_LE2C04A18EN_250520 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2452.00</td><td>88.40</td><td>-----</td><td>-----</td><td>76.64</td><td>26.80</td><td>8.14</td><td>32.63</td><td>9.45</td><td>200</td><td>180</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2452.00	88.40	-----	-----	76.64	26.80	8.14	32.63	9.45	200	180	Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2300.72	50.43	74.00	-23.57	38.83	26.69	8.05	32.58	9.44	200	100	Peak																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2452.00	88.40	-----	-----	76.64	26.80	8.14	32.63	9.45	200	180	Peak																																																																																								
Avg	Level (dBuV/m) Date: 2025-06-20 Site : 03CH22-HY Condition: AVG_BE_54 3m DRH18-E_LE2C04A18EN_250520 VERTICAL : RBW:1000.000kHz VBW:1.200kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2363.68</td><td>39.70</td><td>54.00</td><td>-14.30</td><td>27.92</td><td>26.90</td><td>8.02</td><td>32.57</td><td>9.43</td><td>200</td><td>180</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2363.68	39.70	54.00	-14.30	27.92	26.90	8.02	32.57	9.43	200	180	Average	Level (dBuV/m) Date: 2025-06-20 Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_250520 VERTICAL : RBW:1000.000kHz VBW:1.200kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2452.00</td><td>80.68</td><td>-----</td><td>-----</td><td>68.92</td><td>26.80</td><td>8.14</td><td>32.63</td><td>9.45</td><td>200</td><td>180</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2452.00	80.68	-----	-----	68.92	26.80	8.14	32.63	9.45	200	180	Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2363.68	39.70	54.00	-14.30	27.92	26.90	8.02	32.57	9.43	200	180	Average																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2452.00	80.68	-----	-----	68.92	26.80	8.14	32.63	9.45	200	180	Average																																																																																								



Mode	13											
	Band Edge - R											
	2400-2483.5_802.11n HT40_CH09_2452MHz											
ANT	1											
Pol.	Vertical						Fundamental					
Peak												



Mode	13																																																																																																																																																																																																																																																																																																																	
	Harmonic																																																																																																																																																																																																																																																																																																																	
	2400-2483.5_802.11n HT40_CH09_2452MHz																																																																																																																																																																																																																																																																																																																	
ANT	1																																																																																																																																																																																																																																																																																																																	
Pol.	Horizontal																																																																																																																																																																																																																																																																																																																	
Peak Avg	Level (dBuV/m) Date: 2025-06-20 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 1000580010600114001200012600132001380014400150001560016200168001740018000186001920019800204002100021600222002280023400240002460025000 Frequency (MHz) Site : 03CH22-HY Condition: PEAK_74 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2230.00</td><td>57.93</td><td>74.00</td><td>-16.07</td><td>46.48</td><td>26.70</td><td>7.82</td><td>32.48</td><td>9.41</td><td>132</td><td>165</td><td>Peak</td><td></td></tr><tr><td>2</td><td>2230.00</td><td>49.71</td><td>54.00</td><td>-4.29</td><td>38.26</td><td>26.70</td><td>7.82</td><td>32.48</td><td>9.41</td><td>132</td><td>165</td><td>Average</td><td></td></tr><tr><td>3</td><td>2676.00</td><td>56.25</td><td>74.00</td><td>-17.75</td><td>43.60</td><td>27.46</td><td>8.38</td><td>32.68</td><td>9.49</td><td>102</td><td>171</td><td>Peak</td><td></td></tr><tr><td>4</td><td>2676.00</td><td>48.68</td><td>54.00</td><td>-5.32</td><td>36.03</td><td>27.46</td><td>8.38</td><td>32.68</td><td>9.49</td><td>102</td><td>171</td><td>Average</td><td></td></tr><tr><td>5</td><td>4904.00</td><td>50.02</td><td>74.00</td><td>-23.98</td><td>38.43</td><td>32.42</td><td>11.64</td><td>33.67</td><td>1.20</td><td>103</td><td>144</td><td>Peak</td><td></td></tr><tr><td>6</td><td>4904.00</td><td>46.01</td><td>54.00</td><td>-7.99</td><td>34.42</td><td>32.42</td><td>11.64</td><td>33.67</td><td>1.20</td><td>103</td><td>144</td><td>Average</td><td></td></tr><tr><td>7</td><td>7356.00</td><td>49.74</td><td>74.00</td><td>-24.26</td><td>33.91</td><td>37.19</td><td>14.28</td><td>36.66</td><td>1.02</td><td>--</td><td>--</td><td>Peak</td><td></td></tr><tr><td>8</td><td>7356.00</td><td>39.26</td><td>54.00</td><td>-14.74</td><td>23.43</td><td>37.19</td><td>14.28</td><td>36.66</td><td>1.02</td><td>--</td><td>--</td><td>Average</td><td></td></tr></table>														Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg		1	2230.00	57.93	74.00	-16.07	46.48	26.70	7.82	32.48	9.41	132	165	Peak		2	2230.00	49.71	54.00	-4.29	38.26	26.70	7.82	32.48	9.41	132	165	Average		3	2676.00	56.25	74.00	-17.75	43.60	27.46	8.38	32.68	9.49	102	171	Peak		4	2676.00	48.68	54.00	-5.32	36.03	27.46	8.38	32.68	9.49	102	171	Average		5	4904.00	50.02	74.00	-23.98	38.43	32.42	11.64	33.67	1.20	103	144	Peak		6	4904.00	46.01	54.00	-7.99	34.42	32.42	11.64	33.67	1.20	103	144	Average		7	7356.00	49.74	74.00	-24.26	33.91	37.19	14.28	36.66	1.02	--	--	Peak		8	7356.00	39.26	54.00	-14.74	23.43	37.19	14.28	36.66	1.02	--	--	Average		Level (dBuV/m) Date: 2025-06-20 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 1000580010600114001200012600132001380014400150001560016200168001740018000186001920019800204002100021600222002280023400240002460025000 Frequency (MHz) Site : 03CH22-HY Condition: PEAK_74 3m DRH18-E_LE2C04A18EN_250520 VERTICAL <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2230.00</td><td>54.20</td><td>74.00</td><td>-19.80</td><td>42.75</td><td>26.70</td><td>7.82</td><td>32.48</td><td>9.41</td><td>300</td><td>118</td><td>Peak</td><td></td></tr><tr><td>2</td><td>2230.00</td><td>46.00</td><td>54.00</td><td>-7.92</td><td>34.63</td><td>26.70</td><td>7.82</td><td>32.48</td><td>9.41</td><td>300</td><td>118</td><td>Average</td><td></td></tr><tr><td>3</td><td>2676.00</td><td>55.22</td><td>74.00</td><td>-18.78</td><td>42.57</td><td>27.46</td><td>8.38</td><td>32.68</td><td>9.49</td><td>328</td><td>106</td><td>Peak</td><td></td></tr><tr><td>4</td><td>2676.00</td><td>47.78</td><td>54.00</td><td>-6.22</td><td>35.13</td><td>27.46</td><td>8.38</td><td>32.68</td><td>9.49</td><td>328</td><td>106</td><td>Average</td><td></td></tr><tr><td>5</td><td>4904.00</td><td>49.39</td><td>74.00</td><td>-24.61</td><td>37.80</td><td>32.42</td><td>11.64</td><td>33.67</td><td>1.20</td><td>274</td><td>191</td><td>Peak</td><td></td></tr><tr><td>6</td><td>4904.00</td><td>44.95</td><td>54.00</td><td>-9.05</td><td>33.36</td><td>32.42</td><td>11.64</td><td>33.67</td><td>1.20</td><td>274</td><td>191</td><td>Average</td><td></td></tr><tr><td>7</td><td>7356.00</td><td>49.43</td><td>74.00</td><td>-24.57</td><td>33.60</td><td>37.19</td><td>14.28</td><td>36.66</td><td>1.02</td><td>--</td><td>--</td><td>Peak</td><td></td></tr><tr><td>8</td><td>7356.00</td><td>39.19</td><td>54.00</td><td>-14.81</td><td>23.36</td><td>37.19</td><td>14.28</td><td>36.66</td><td>1.02</td><td>--</td><td>--</td><td>Average</td><td></td></tr></table>														Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg		1	2230.00	54.20	74.00	-19.80	42.75	26.70	7.82	32.48	9.41	300	118	Peak		2	2230.00	46.00	54.00	-7.92	34.63	26.70	7.82	32.48	9.41	300	118	Average		3	2676.00	55.22	74.00	-18.78	42.57	27.46	8.38	32.68	9.49	328	106	Peak		4	2676.00	47.78	54.00	-6.22	35.13	27.46	8.38	32.68	9.49	328	106	Average		5	4904.00	49.39	74.00	-24.61	37.80	32.42	11.64	33.67	1.20	274	191	Peak		6	4904.00	44.95	54.00	-9.05	33.36	32.42	11.64	33.67	1.20	274	191	Average		7	7356.00	49.43	74.00	-24.57	33.60	37.19	14.28	36.66	1.02	--	--	Peak		8	7356.00	39.19	54.00	-14.81	23.36	37.19	14.28	36.66	1.02	--	--	Average	
		Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																																																																																																																				
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																																																																																																																																																																																																																																					
	1	2230.00	57.93	74.00	-16.07	46.48	26.70	7.82	32.48	9.41	132	165	Peak																																																																																																																																																																																																																																																																																																					
	2	2230.00	49.71	54.00	-4.29	38.26	26.70	7.82	32.48	9.41	132	165	Average																																																																																																																																																																																																																																																																																																					
	3	2676.00	56.25	74.00	-17.75	43.60	27.46	8.38	32.68	9.49	102	171	Peak																																																																																																																																																																																																																																																																																																					
	4	2676.00	48.68	54.00	-5.32	36.03	27.46	8.38	32.68	9.49	102	171	Average																																																																																																																																																																																																																																																																																																					
	5	4904.00	50.02	74.00	-23.98	38.43	32.42	11.64	33.67	1.20	103	144	Peak																																																																																																																																																																																																																																																																																																					
	6	4904.00	46.01	54.00	-7.99	34.42	32.42	11.64	33.67	1.20	103	144	Average																																																																																																																																																																																																																																																																																																					
	7	7356.00	49.74	74.00	-24.26	33.91	37.19	14.28	36.66	1.02	--	--	Peak																																																																																																																																																																																																																																																																																																					
8	7356.00	39.26	54.00	-14.74	23.43	37.19	14.28	36.66	1.02	--	--	Average																																																																																																																																																																																																																																																																																																						
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																																																																																																																																																																																																																																						
1	2230.00	54.20	74.00	-19.80	42.75	26.70	7.82	32.48	9.41	300	118	Peak																																																																																																																																																																																																																																																																																																						
2	2230.00	46.00	54.00	-7.92	34.63	26.70	7.82	32.48	9.41	300	118	Average																																																																																																																																																																																																																																																																																																						
3	2676.00	55.22	74.00	-18.78	42.57	27.46	8.38	32.68	9.49	328	106	Peak																																																																																																																																																																																																																																																																																																						
4	2676.00	47.78	54.00	-6.22	35.13	27.46	8.38	32.68	9.49	328	106	Average																																																																																																																																																																																																																																																																																																						
5	4904.00	49.39	74.00	-24.61	37.80	32.42	11.64	33.67	1.20	274	191	Peak																																																																																																																																																																																																																																																																																																						
6	4904.00	44.95	54.00	-9.05	33.36	32.42	11.64	33.67	1.20	274	191	Average																																																																																																																																																																																																																																																																																																						
7	7356.00	49.43	74.00	-24.57	33.60	37.19	14.28	36.66	1.02	--	--	Peak																																																																																																																																																																																																																																																																																																						
8	7356.00	39.19	54.00	-14.81	23.36	37.19	14.28	36.66	1.02	--	--	Average																																																																																																																																																																																																																																																																																																						



		14																																																																																																
Mode	Band Edge																																																																																																	
	2400-2483.5_802.11n HT20_CH01_2412MHz																																																																																																	
ANT	1																																																																																																	
Pol.	Horizontal						Fundamental																																																																																											
Peak	Level (dBuV/m) Date: 2025-06-20 Site : 03CH22-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.95</td><td>61.21</td><td>74.00</td><td>-12.79</td><td>49.70</td><td>26.60</td><td>8.06</td><td>32.59</td><td>9.44</td><td>140</td><td>162</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	2389.95	61.21	74.00	-12.79	49.70	26.60	8.06	32.59	9.44	140	162	Peak	Level (dBuV/m) Date: 2025-06-20 Site : 03CH22-HY Condition: PEAK_74 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>106.67</td><td>-----</td><td>-----</td><td>95.14</td><td>26.80</td><td>8.09</td><td>32.60</td><td>9.44</td><td>140</td><td>162</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	2412.00	106.67	-----	-----	95.14	26.80	8.09	32.60	9.44	140	162	Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																																									
1	2389.95	61.21	74.00	-12.79	49.70	26.60	8.06	32.59	9.44	140	162	Peak																																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																																									
1	2412.00	106.67	-----	-----	95.14	26.80	8.09	32.60	9.44	140	162	Peak																																																																																						
Avg	Level (dBuV/m) Date: 2025-06-20 Site : 03CH22-HY Condition: AVG_BE_54 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL : RBW:1000.000kHz VBW:1.200kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.95</td><td>50.90</td><td>54.00</td><td>-3.10</td><td>39.39</td><td>26.60</td><td>8.06</td><td>32.59</td><td>9.44</td><td>140</td><td>162</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	2389.95	50.90	54.00	-3.10	39.39	26.60	8.06	32.59	9.44	140	162	Average	Level (dBuV/m) Date: 2025-06-20 Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL : RBW:1000.000kHz VBW:1.200kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>98.63</td><td>-----</td><td>-----</td><td>86.97</td><td>26.74</td><td>8.08</td><td>32.60</td><td>9.44</td><td>140</td><td>162</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	2412.00	98.63	-----	-----	86.97	26.74	8.08	32.60	9.44	140	162	Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																																									
1	2389.95	50.90	54.00	-3.10	39.39	26.60	8.06	32.59	9.44	140	162	Average																																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																																									
1	2412.00	98.63	-----	-----	86.97	26.74	8.08	32.60	9.44	140	162	Average																																																																																						



Mode	14																																																																																									
	Band Edge																																																																																									
	2400-2483.5_802.11n_HT20_CH01_2412MHz																																																																																									
ANT	1																																																																																									
Pol.	Vertical						Fundamental																																																																																			
Peak	Level (dBuV/m) Date: 2025-06-21 Site : 03CH22-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C04A18EN_250520 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2389.56</td><td>57.67</td><td>74.00</td><td>-16.33</td><td>46.16</td><td>26.60</td><td>8.06</td><td>32.59</td><td>9.44</td><td>111</td><td>185</td><td>Peak</td></tr></tbody></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2389.56	57.67	74.00	-16.33	46.16	26.60	8.06	32.59	9.44	111	185	Peak	Level (dBuV/m) Date: 2025-06-21 Site : 03CH22-HY Condition: PEAK_74 3m DRH18-E_LE2C04A18EN_250520 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2412.00</td><td>102.98</td><td>-----</td><td>-----</td><td>91.25</td><td>26.80</td><td>8.09</td><td>32.60</td><td>9.44</td><td>111</td><td>185</td><td>Peak</td></tr></tbody></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2412.00	102.98	-----	-----	91.25	26.80	8.09	32.60	9.44	111	185	Peak
		Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																															
1	2389.56	57.67	74.00	-16.33	46.16	26.60	8.06	32.59	9.44	111	185	Peak																																																																														
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																															
1	2412.00	102.98	-----	-----	91.25	26.80	8.09	32.60	9.44	111	185	Peak																																																																														
Avg	Level (dBuV/m) Date: 2025-06-21 Site : 03CH22-HY Condition: AVG_BE_54 3m DRH18-E_LE2C04A18EN_250520 VERTICAL : RBW:1000.000kHz VBW:1.200kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2389.95</td><td>47.29</td><td>54.00</td><td>-6.71</td><td>35.78</td><td>26.60</td><td>8.06</td><td>32.59</td><td>9.44</td><td>111</td><td>185</td><td>Average</td></tr></tbody></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2389.95	47.29	54.00	-6.71	35.78	26.60	8.06	32.59	9.44	111	185	Average	Level (dBuV/m) Date: 2025-06-21 Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_250520 VERTICAL : RBW:1000.000kHz VBW:1.200kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2412.00</td><td>94.77</td><td>-----</td><td>-----</td><td>83.11</td><td>26.74</td><td>8.08</td><td>32.60</td><td>9.44</td><td>111</td><td>185</td><td>Average</td></tr></tbody></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2412.00	94.77	-----	-----	83.11	26.74	8.08	32.60	9.44	111	185	Average
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																															
1	2389.95	47.29	54.00	-6.71	35.78	26.60	8.06	32.59	9.44	111	185	Average																																																																														
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																															
1	2412.00	94.77	-----	-----	83.11	26.74	8.08	32.60	9.44	111	185	Average																																																																														



Mode	14																																																																																																																																																																																																																																													
	Harmonic																																																																																																																																																																																																																																													
	2400-2483.5_802.11n HT20_CH01_2412MHz																																																																																																																																																																																																																																													
ANT	1																																																																																																																																																																																																																																													
Pol.	Horizontal							Vertical																																																																																																																																																																																																																																						
Peak Avg	Level (dBuV/m) Date: 2025-06-21 Site : 03CH22-HY Condition: PEAK_74 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2163.00</td><td>50.48</td><td>74.00</td><td>-23.52</td><td>39.40</td><td>26.40</td><td>7.70</td><td>32.44</td><td>9.42</td><td>143</td><td>167</td><td>Peak</td><td></td></tr><tr><td>2</td><td>2163.00</td><td>40.78</td><td>54.00</td><td>-13.22</td><td>29.70</td><td>26.40</td><td>7.70</td><td>32.44</td><td>9.42</td><td>143</td><td>167</td><td>Average</td><td></td></tr><tr><td>3</td><td>2651.00</td><td>52.86</td><td>74.00</td><td>-21.14</td><td>40.22</td><td>27.49</td><td>8.34</td><td>32.68</td><td>9.49</td><td>116</td><td>171</td><td>Peak</td><td></td></tr><tr><td>4</td><td>2651.00</td><td>48.16</td><td>54.00</td><td>-5.84</td><td>35.52</td><td>27.49</td><td>8.34</td><td>32.68</td><td>9.49</td><td>116</td><td>171</td><td>Average</td><td></td></tr><tr><td>5</td><td>4824.00</td><td>50.94</td><td>74.00</td><td>-23.06</td><td>39.51</td><td>32.20</td><td>11.53</td><td>33.67</td><td>1.37</td><td>108</td><td>145</td><td>Peak</td><td></td></tr><tr><td>6</td><td>4824.00</td><td>46.86</td><td>54.00</td><td>-7.14</td><td>35.43</td><td>32.20</td><td>11.53</td><td>33.67</td><td>1.37</td><td>108</td><td>145</td><td>Average</td><td></td></tr></tbody></table>								Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2163.00	50.48	74.00	-23.52	39.40	26.40	7.70	32.44	9.42	143	167	Peak		2	2163.00	40.78	54.00	-13.22	29.70	26.40	7.70	32.44	9.42	143	167	Average		3	2651.00	52.86	74.00	-21.14	40.22	27.49	8.34	32.68	9.49	116	171	Peak		4	2651.00	48.16	54.00	-5.84	35.52	27.49	8.34	32.68	9.49	116	171	Average		5	4824.00	50.94	74.00	-23.06	39.51	32.20	11.53	33.67	1.37	108	145	Peak		6	4824.00	46.86	54.00	-7.14	35.43	32.20	11.53	33.67	1.37	108	145	Average		Level (dBuV/m) Date: 2025-06-21 Site : 03CH22-HY Condition: PEAK_74 3m DRH18-E_LE2C04A18EN_250520 VERTICAL <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2164.00</td><td>49.48</td><td>74.00</td><td>-24.52</td><td>38.39</td><td>26.40</td><td>7.71</td><td>32.44</td><td>9.42</td><td>153</td><td>175</td><td>Peak</td><td></td></tr><tr><td>2</td><td>2164.00</td><td>38.77</td><td>54.00</td><td>-15.23</td><td>27.68</td><td>26.40</td><td>7.71</td><td>32.44</td><td>9.42</td><td>153</td><td>175</td><td>Average</td><td></td></tr><tr><td>3</td><td>2646.00</td><td>52.67</td><td>74.00</td><td>-21.33</td><td>40.02</td><td>27.50</td><td>8.34</td><td>32.68</td><td>9.49</td><td>344</td><td>106</td><td>Peak</td><td></td></tr><tr><td>4</td><td>2646.00</td><td>47.32</td><td>54.00</td><td>-6.68</td><td>34.67</td><td>27.50</td><td>8.34</td><td>32.68</td><td>9.49</td><td>344</td><td>106</td><td>Average</td><td></td></tr><tr><td>5</td><td>4824.00</td><td>50.26</td><td>74.00</td><td>-23.74</td><td>38.83</td><td>32.20</td><td>11.53</td><td>33.67</td><td>1.37</td><td>338</td><td>194</td><td>Peak</td><td></td></tr><tr><td>6</td><td>4824.00</td><td>45.67</td><td>54.00</td><td>-8.33</td><td>34.24</td><td>32.20</td><td>11.53</td><td>33.67</td><td>1.37</td><td>338</td><td>194</td><td>Average</td><td></td></tr></tbody></table>								Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2164.00	49.48	74.00	-24.52	38.39	26.40	7.71	32.44	9.42	153	175	Peak		2	2164.00	38.77	54.00	-15.23	27.68	26.40	7.71	32.44	9.42	153	175	Average		3	2646.00	52.67	74.00	-21.33	40.02	27.50	8.34	32.68	9.49	344	106	Peak		4	2646.00	47.32	54.00	-6.68	34.67	27.50	8.34	32.68	9.49	344	106	Average		5	4824.00	50.26	74.00	-23.74	38.83	32.20	11.53	33.67	1.37	338	194	Peak		6	4824.00	45.67	54.00	-8.33	34.24	32.20	11.53	33.67	1.37	338	194	Average	
		Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																																																																																		
1	2163.00	50.48	74.00	-23.52	39.40	26.40	7.70	32.44	9.42	143	167	Peak																																																																																																																																																																																																																																		
2	2163.00	40.78	54.00	-13.22	29.70	26.40	7.70	32.44	9.42	143	167	Average																																																																																																																																																																																																																																		
3	2651.00	52.86	74.00	-21.14	40.22	27.49	8.34	32.68	9.49	116	171	Peak																																																																																																																																																																																																																																		
4	2651.00	48.16	54.00	-5.84	35.52	27.49	8.34	32.68	9.49	116	171	Average																																																																																																																																																																																																																																		
5	4824.00	50.94	74.00	-23.06	39.51	32.20	11.53	33.67	1.37	108	145	Peak																																																																																																																																																																																																																																		
6	4824.00	46.86	54.00	-7.14	35.43	32.20	11.53	33.67	1.37	108	145	Average																																																																																																																																																																																																																																		
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																																																																																		
1	2164.00	49.48	74.00	-24.52	38.39	26.40	7.71	32.44	9.42	153	175	Peak																																																																																																																																																																																																																																		
2	2164.00	38.77	54.00	-15.23	27.68	26.40	7.71	32.44	9.42	153	175	Average																																																																																																																																																																																																																																		
3	2646.00	52.67	74.00	-21.33	40.02	27.50	8.34	32.68	9.49	344	106	Peak																																																																																																																																																																																																																																		
4	2646.00	47.32	54.00	-6.68	34.67	27.50	8.34	32.68	9.49	344	106	Average																																																																																																																																																																																																																																		
5	4824.00	50.26	74.00	-23.74	38.83	32.20	11.53	33.67	1.37	338	194	Peak																																																																																																																																																																																																																																		
6	4824.00	45.67	54.00	-8.33	34.24	32.20	11.53	33.67	1.37	338	194	Average																																																																																																																																																																																																																																		



Mode	15																																																																																																																																																																																																																												
	LF																																																																																																																																																																																																																												
	2400-2483.5_802.11ax HE20_CH01_Full RU_2412MHz																																																																																																																																																																																																																												
ANT	1																																																																																																																																																																																																																												
Pol.	Horizontal											Vertical																																																																																																																																																																																																																	
QPI Peak	Level (dBuV/m) Date: 2025-06-24 Site : 03CH22-HY Condition: QP 3m Bilog_63304_241217 HORIZONTAL <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>75.59</td><td>32.12</td><td>40.00</td><td>-7.88</td><td>50.48</td><td>12.06</td><td>1.42</td><td>32.69</td><td>0.05</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>95.96</td><td>37.09</td><td>43.50</td><td>-6.41</td><td>52.76</td><td>15.39</td><td>1.58</td><td>32.70</td><td>0.06</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>3</td><td>271.53</td><td>27.99</td><td>46.00</td><td>-18.01</td><td>38.82</td><td>19.01</td><td>2.70</td><td>32.62</td><td>0.08</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>4</td><td>299.66</td><td>34.05</td><td>46.00</td><td>-11.95</td><td>44.34</td><td>19.39</td><td>2.86</td><td>32.62</td><td>0.08</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>5</td><td>715.79</td><td>31.92</td><td>46.00</td><td>-14.08</td><td>33.07</td><td>27.03</td><td>4.45</td><td>32.78</td><td>0.15</td><td>200</td><td>243</td><td>QP</td></tr><tr><td>6</td><td>800.18</td><td>35.92</td><td>46.00</td><td>-10.08</td><td>35.23</td><td>28.20</td><td>4.65</td><td>32.38</td><td>0.22</td><td>100</td><td>6</td><td>QP</td></tr></tbody></table> Level (dBuV/m) Date: 2025-06-24 Site : 03CH22-HY Condition: QP 3m Bilog_63304_241217 VERTICAL <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>71.71</td><td>33.31</td><td>40.00</td><td>-6.69</td><td>52.01</td><td>12.57</td><td>1.39</td><td>32.70</td><td>0.04</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>95.96</td><td>32.26</td><td>43.50</td><td>-11.24</td><td>47.93</td><td>15.39</td><td>1.58</td><td>32.70</td><td>0.06</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>3</td><td>272.50</td><td>22.36</td><td>46.00</td><td>-23.64</td><td>33.24</td><td>18.95</td><td>2.71</td><td>32.62</td><td>0.08</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>4</td><td>313.24</td><td>30.54</td><td>46.00</td><td>-15.46</td><td>40.83</td><td>19.36</td><td>2.91</td><td>32.64</td><td>0.08</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>5</td><td>714.82</td><td>34.01</td><td>46.00</td><td>-11.99</td><td>35.21</td><td>26.99</td><td>4.45</td><td>32.79</td><td>0.15</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>6</td><td>796.30</td><td>38.58</td><td>46.00</td><td>-7.42</td><td>37.85</td><td>28.27</td><td>4.64</td><td>32.40</td><td>0.22</td><td>--</td><td>--</td><td>Peak</td></tr></tbody></table>														Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	75.59	32.12	40.00	-7.88	50.48	12.06	1.42	32.69	0.05	--	--	Peak	2	95.96	37.09	43.50	-6.41	52.76	15.39	1.58	32.70	0.06	--	--	Peak	3	271.53	27.99	46.00	-18.01	38.82	19.01	2.70	32.62	0.08	--	--	Peak	4	299.66	34.05	46.00	-11.95	44.34	19.39	2.86	32.62	0.08	--	--	Peak	5	715.79	31.92	46.00	-14.08	33.07	27.03	4.45	32.78	0.15	200	243	QP	6	800.18	35.92	46.00	-10.08	35.23	28.20	4.65	32.38	0.22	100	6	QP		Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	71.71	33.31	40.00	-6.69	52.01	12.57	1.39	32.70	0.04	--	--	Peak	2	95.96	32.26	43.50	-11.24	47.93	15.39	1.58	32.70	0.06	--	--	Peak	3	272.50	22.36	46.00	-23.64	33.24	18.95	2.71	32.62	0.08	--	--	Peak	4	313.24	30.54	46.00	-15.46	40.83	19.36	2.91	32.64	0.08	--	--	Peak	5	714.82	34.01	46.00	-11.99	35.21	26.99	4.45	32.79	0.15	--	--	Peak	6	796.30	38.58	46.00	-7.42	37.85	28.27	4.64	32.40	0.22	--	--	Peak
		Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																																
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																																																																	
1	75.59	32.12	40.00	-7.88	50.48	12.06	1.42	32.69	0.05	--	--	Peak																																																																																																																																																																																																																	
2	95.96	37.09	43.50	-6.41	52.76	15.39	1.58	32.70	0.06	--	--	Peak																																																																																																																																																																																																																	
3	271.53	27.99	46.00	-18.01	38.82	19.01	2.70	32.62	0.08	--	--	Peak																																																																																																																																																																																																																	
4	299.66	34.05	46.00	-11.95	44.34	19.39	2.86	32.62	0.08	--	--	Peak																																																																																																																																																																																																																	
5	715.79	31.92	46.00	-14.08	33.07	27.03	4.45	32.78	0.15	200	243	QP																																																																																																																																																																																																																	
6	800.18	35.92	46.00	-10.08	35.23	28.20	4.65	32.38	0.22	100	6	QP																																																																																																																																																																																																																	
	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																																																																		
1	71.71	33.31	40.00	-6.69	52.01	12.57	1.39	32.70	0.04	--	--	Peak																																																																																																																																																																																																																	
2	95.96	32.26	43.50	-11.24	47.93	15.39	1.58	32.70	0.06	--	--	Peak																																																																																																																																																																																																																	
3	272.50	22.36	46.00	-23.64	33.24	18.95	2.71	32.62	0.08	--	--	Peak																																																																																																																																																																																																																	
4	313.24	30.54	46.00	-15.46	40.83	19.36	2.91	32.64	0.08	--	--	Peak																																																																																																																																																																																																																	
5	714.82	34.01	46.00	-11.99	35.21	26.99	4.45	32.79	0.15	--	--	Peak																																																																																																																																																																																																																	
6	796.30	38.58	46.00	-7.42	37.85	28.27	4.64	32.40	0.22	--	--	Peak																																																																																																																																																																																																																	



Appendix D. Duty Cycle Plots

Band	Duty Cycle (%)	T(us)	1/T(kHz)	VBW Setting
802.11b	89.28	447	2.24	2.4kHz
802.11g	98.72	-	-	10Hz
2.4GHz 802.11ax HE20 Full RU	89.55	895	1.12	1.2kHz
2.4GHz 802.11ax HE20 106 RU	99.57	-	-	10Hz
2.4GHz 802.11n HT20	89.61	906	1.10	1.2kHz
2.4GHz 802.11n HT40	89.56	892	1.12	1.2kHz

