

TEST REPORT FROM RADIO FREQUENCY INVESTIGATION LTD.

Test Of: Adaptive Broadband Ltd
AB-ACCESS Subscriber Unit (SU)

To: FCC Part 15 Subpart E: 1998
(Unlicensed National Information
Infrastructure Devices)

Test Report Serial No:
RFI/EMCB1/RP38658A

This Test Report Is Issued Under The Authority Of Brian Watson Technical Director: 	Checked By: 
Tested By: 	Release Version No: PDF04
Issue Date: 13 December 2000	Test Date: 29 March 1999 to 02 April 1999

This report is issued in Adobe Acrobat portable document format (PDF). It is only a valid copy of the report if it is being viewed in PDF format with the following security options not allowed: Changing the document, Selecting text and graphics, Adding or changing notes and form fields. Furthermore, the date of creation must match the issue date stated above.
This report may be copied in full.

Radio Frequency Investigation Ltd, Ewhurst Park, Ramsdell, Basingstoke, Hampshire, RG26 5RQ, ENGLAND. Tel: +44 (0) 1256 851193 Fax: +44 (0) 1256 851192	Registered in England, No. 211 7901. Registered Office: Ewhurst Park, Ramsdell, Basingstoke, Hampshire RG26 5RQ	
--	--	---

RADIO FREQUENCY INVESTIGATION LTD.

EMC Department

Test Of: Adaptive Broadband Ltd
To: AB-ACCESS Subscriber Unit (SU)
F.C.C. Part 15 Subpart E: 1998

TEST REPORT

S.No: RFI/EMCB1/RP38658A

Page 2 of 2

Issue Date: 13 December 2000

This page has been left intentionally blank.

Test Of: Adaptive Broadband Ltd
AB-ACCESS Subscriber Unit (SU)
To: F.C.C. Part 15 Subpart E: 1998

Table of Contents

1. Client Information..... 4

2. Equipment Under Test (EUT) 5

3. Test Specification, Methods And Procedures 9

4. Deviations From The Test Specification..... 10

5. Operation Of The EUT During Testing 11

6. Summary Of Test Results..... 12

7. Measurements, Examinations And Derived Results 13

8. Measurement Uncertainty..... 32

Appendix 1. Test Equipment Used..... 33

Appendix 2. Measurement Methods 35

Appendix 3. Test Configuration Drawings..... 42

Appendix 4. Graphical Test Results 47

Appendix 5. Photographs of EUT 59

Test Of: Adaptive Broadband Ltd
AB-ACCESS Subscriber Unit (SU)
To: F.C.C. Part 15 Subpart E: 1998

1. Client Information

Company Name:	Adaptive Broadband Ltd
Address:	First Floor, Block C1 The Westbrook Centre Milton Road Cambridge CB4 1YQ Tel: +44-1223-713713 Fax: +44-1223-713714
Contact Name:	Mr P. Simpson Tel: +44-1223-713412 E-Mail: ps@adaptivebroadband.com

Test Of: Adaptive Broadband Ltd
AB-ACCESS Subscriber Unit (SU)
To: F.C.C. Part 15 Subpart E: 1998

2. Equipment Under Test (EUT)

The following information (with the exception of the Date of Receipt) has been supplied by the client:

2.1. Identification Of Equipment Under Test (EUT)

Brand Name:	AB-ACCESS
Model Name or Number:	Subscriber Unit (SU)
Unique Type Identification:	UNII Pilot
Serial Number:	Pre-Production 001
Country of Manufacture:	UK
FCC ID Number:	Awaiting Certification from the FCC
Date of Receipt:	26 March 1999

Brand Name:	AB-ACCESS
Model Name or Number:	SU and AP 'Wall-Box'
Unique Type Identification:	RJ45
Serial Number:	Pre-Production 001
Country of Manufacture:	UK
FCC ID Number:	Awaiting Certification from the FCC
Date of Receipt:	26 March 1999

Brand Name:	Sinpro Electronic co. Ltd
Description	DC Power Supply Unit
Model Name or Number:	SPU50-9
Unique Type Identification:	None stated by client
Serial Number:	120671
Country of Manufacture:	Taiwan
FCC ID Number:	Awaiting Certification from the FCC
Date of Receipt:	26 March 1999

2.2. Description Of EUT

AB-ACCESS is targeted at providing high speed wireless internet access in the recently assigned FCC U-NII bands between 5GHz and 6GHz. AB-ACCESS adopts a cellular structure consisting of base stations (Access Point [AP]) servicing many users. It is a fixed access, point to multipoint infrastructure. The product is targeted at the US market only.

Users are equipped with wall/roof-top/chimney mounted Subscriber Units (SU) that have a line sight link back to the AP. The SU is again fitted with a high gain, directional integral antenna having a 20 degree 3dB beamwidth. Power and data (bi-directional) are routed via braid and foiled screened, quad twisted pair, Cat-5 data cable from an internally mounted wall-box (similar in construction to a telephone outlet socket) up to the SU antenna unit. Power and data status is also routed via this cable. Power is provided to the wall-box via a standard FCC approved 48V DC supply. The wall-box provides Ethernet connectivity via the RJ45 socket to the users PC.

2.3. Modifications Incorporated In EUT

The EUT has been modified so that it can be driven from a PC test script enabling worst case conditions for FCC requirements to be evaluated and tested for compliance. This modification is purely a software driver. AB-ACCESS employs a rapid TDD (Time Divisions Duplex) air interface based on ATM (Asynchronous Transfer Mode) networking protocols - data is transmitted asynchronously on demand and as such there is no discernible duty from which 'averaged' measurements can be taken. The following test modes have been implemented:

Continuous Transmit – this enables worst case EIRP and PSD to be measured, the unit is set for maximum transmit power.

Continuous Receive – There may be some fundamental frequency components that exceed the switch receive test-mode, again the unit is set to maximum receive gain.

Burst Receive - to measure worst radiated and conducted EMC in receive mode. A predetermined duty cycle will be used, the unit is set for maximum receive gain.

Maximum Transmit Power - this is worst case for switching transients creating spurious emissions – EMC radiated and conducted. As above, a predetermined duty cycle will be used, as before the unit is set for maximum transmits power.

Within each of these modes we can change the operating channel as desired by means of the PC controller.

Test Of: Adaptive Broadband Ltd
AB-ACCESS Subscriber Unit (SU)
To: F.C.C. Part 15 Subpart E: 1998

2.4. Additional Information Related To Testing

Power Supply Requirement:	115 V, 60 Hz AC Mains to PSU 48 VDC from PSU to EUT
Current Rating	830mA
Intended Operating Environment:	SU antenna units are mounted outside, operational range is -20 to +50 degrees Celsius. "Wall-box" units and PSUs are mounted internally to users buildings/office/home.
Weight:	SU antenna unit 3.5 Kg max
Dimensions:	SU = 260mm (h) x 250mm (w) x 80mm (d)
Interface Ports:	'Wall-box' RJ45 socket – Ethernet / ATM available
Type of Device	Fixed Access Wireless Internet System
Antenna Details	Permanently Attached
Occupied Bandwidth	17 MHz
Type of Modulation	QPSK at 25Mbps/sec, raised cosine filter ($\alpha = 0.35$)
Number of Tx Channels	15 Channels of 15 MHz, 5 channels in each U-NII Band
Method of Frequency Generation	Synthesiser
Category of Receiver	Superheterodyne

Test Of: Adaptive Broadband Ltd
AB-ACCESS Subscriber Unit (SU)
To: F.C.C. Part 15 Subpart E: 1998

2.5. Support Equipment

The following support equipment was used to exercise the EUT during testing:

Description:	PC
Brand Name:	Dell
Model Name or Number:	Latitude
Serial Number:	DP/N0009321C – 12800 – 8BM2910 – ZL6D8
FCC ID Number:	None stated by client
Cable Length And Type:	6m Ethernet UTP
Connected to Port:	Wall-Box

Description:	PSU for PC
Brand Name:	Dell
Model Name or Number:	PA-2
Serial Number:	DP/N 0085391 REV A01
FCC ID Number:	None stated by client
Cable Length And Type:	1m DC
Connected to Port:	PC Input

Test Of: Adaptive Broadband Ltd
AB-ACCESS Subscriber Unit (SU)
To: F.C.C. Part 15 Subpart E: 1998

3. Test Specification, Methods And Procedures

3.1. Test Specification

Reference:	FCC Part 15 Subpart E: 1998
Title:	Code of Federal Regulations, Part 15 (47CFR15) Radio Frequency Devices: Digital Devices. Subpart E: Unlicensed National Information Infrastructure Devices
Comments:	A description of the test facility used for this test is on file with, and has been accepted by, the Federal Communications Commission as required by Section 2.948 of Federal Rules.
Purpose of Test:	To determine whether the equipment complied with the requirements of the specification for the purposes of certification.

3.2. Methods And Procedures

The methods and procedures used were as detailed in:

ANSI C63.2 (1987)

Title: American National Standard for Instrumentation - Electromagnetic noise and field strength.

ANSI C63.4 (1992)

Title: American National Standard Methods of Measurement of Electromagnetic Emissions from Low Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.

ANSI C63.5 (1988)

Title: American National Standard for the Calibration of antennas used for Radiated Emission measurements in Electromagnetic Interference (EMI) control.

ANSI C63.7 (1988)

Title: American National Standard Guide for Construction of Open Area Test Sites for performing Radiated Emission Measurements.

CISPR 16 (1987)

Title: Specification for Radio Interference measuring apparatus and measurement methods.

3.3. Definition Of Measurement Equipment

The measurement equipment used complied with the requirements of the standards referenced in the Methods & Procedures section above. Appendix 1 contains a list of the test equipment used.

RADIO FREQUENCY INVESTIGATION LTD.

EMC Department

Test Of: Adaptive Broadband Ltd
AB-ACCESS Subscriber Unit (SU)
To: F.C.C. Part 15 Subpart E: 1998

TEST REPORT

S.No: RFI/EMCB1/RP38658A

Page 10 of 10

Issue Date: 13 December 2000

4. Deviations From The Test Specification

None

Test Of: Adaptive Broadband Ltd
AB-ACCESS Subscriber Unit (SU)
To: F.C.C. Part 15 Subpart E: 1998

5. Operation Of The EUT During Testing

5.1. Operating Conditions

The EUT was tested in a normal laboratory environment.

During testing, the EUT was powered by a 48 V DC Supply from the PSU. The PSU was powered from a 115 V, 60 Hz AC Mains supply.

5.2. Operating Modes

The EUT was tested in the following operating mode:

Continuous and Maximum Transmit Power for transmitter tests to FCC Part 15 Subpart E (15.407).

Continuous and bursted receive for receiver tests to FCC Part 15 Subpart B.

For both transmit and receive modes, tests were performed with the EUT set to the following channels for each of the 3 operating bands.

Bottom Band: 5.15 to 5.25 GHz:	Bottom Channel (Channel 0)	5.17 GHz
	Top Channel (Channel 4)	5.23 GHz
Middle Band: 5.25 to 5.35 GHz:	Bottom Channel (Channel 5)	5.27 GHz
	Top Channel (Channel 9)	5.33 GHz
Top Band: 5.725 to 5.825 GHz:	Bottom Channel (Channel 10)	5.745 GHz
	Top Channel (Channel 14)	5.805 GHz

The reason for choosing this mode was that it was defined by the client as being likely to be the worst case with regards EMC.

5.3. Configuration And Peripherals

The EUT was tested in the following configuration: The SU antenna unit is connected via S-FTP-Cat5 cable to the wall-box. The power was supplied from the PSU to the wall-box. Data was controlled from the support PC to the wall-box via UTP-Cat5 Ethernet cables.

The reason for choosing this configuration was that it was defined by the client as being likely to be the worst case with regards EMC and typical of an installation at a users home / office.

NB Section 2 of this report contains a full list of support equipment used and Appendix 3 contains a schematic diagram of the test configuration.

6. Summary Of Test Results

6.1. Transmitter Tests

Range Of Measurements	Specification Reference	Compliance Status
AC Powerline Conducted Emissions, 450 kHz to 30 MHz	Section 15.407 (b5) of C.F.R. 47: 1998. (Section 15.207)	Complied
Effective Isotropic Radiated Power Levels, 5 GHz to 6 GHz	Section 15.407 (a) of C.F.R. 47: 1998.	Complied
Electric Field Strength Spurious Emissions, 30 MHz to 1000 MHz	Section 15.407 (b5) of C.F.R. 47: 1998 (Section 15.209)	Complied
Effective Isotropic Radiated Power Spurious Emissions, 1 GHz to 40 GHz	Section 15.407 (b1/2/3) of C.F.R. 47: 1998.	Complied
Frequency Stability -20°C to +50°C 85% to 115% VAC @ 20°C	Section 15.407 (g) of C.F.R. 47: 1997	Complied

6.2. Receiver Tests

Range Of Measurements	Specification Reference	Compliance Status
AC Powerline Conducted Emissions, 450 kHz to 30 MHz	Section 15.107 Class B of C.F.R. 47: 1998.	Complied
Electric Field Strength Spurious Emissions, 30 MHz to 26000 MHz	Section 15.109 Class B of C.F.R. 47: 1998	Complied

6.3. Location Of Tests

All the measurements described in this report were performed at the premises of Radio Frequency Investigation Ltd, Ewhurst Park, Ramsdell, Basingstoke, Hampshire, RG26 5RQ, England.

Test Of: Adaptive Broadband Ltd
AB-ACCESS Subscriber Unit (SU)
To: F.C.C. Part 15 Subpart E: 1998

7. Measurements, Examinations And Derived Results

7.1. General Comments

7.1.1. This section contains test results only. Details of the test methods and procedures can be found in Appendix 2 of this report.

7.1.2. The measurement uncertainties stated were calculated in accordance with the requirements of NAMAS Document NIS 81 with a confidence level of 95%. Please refer to Section 8 for details of measurement uncertainties.

Test Of: Adaptive Broadband Ltd
AB-ACCESS Subscriber Unit (SU)
To: F.C.C. Part 15 Subpart E: 1998

7.2. Test Results For AC Mains Conducted Emissions: Receive Mode

7.2.1. Quasi-Peak Detector Measurements On Live And Neutral Lines

7.2.1.1. Measurements were performed to FCC Part 15.107 Class B (Unintentional Radiators)

7.2.1.2. Plots of the initial scans can be found in Appendix 4.

7.2.1.3. Preliminary conducted spurious emission scans were performed with the EUT set to all 6 channels stated in section 5.2. These preliminary scans showed similar emission levels for each of the channels. Therefore final conducted emission measurements were performed with the EUT set to Top Band Top Channel (Channel 14).

7.2.1.4. The following table lists frequencies at which emissions were measured using a Quasi-Peak detector:

Top Band Top Channel (Channel 14)

Frequency (MHz)	Line	Q-P Level (dBmV)	Q-P Limit (dBmV)	Margin (dB)	Result
0.658	Live	36.0	48.0	12.0	Complied
0.658	Neutral	35.8	48.0	12.2	Complied
0.846	Live	45.9	48.0	2.1	Complied
0.846	Neutral	46.4	48.0	1.6	Complied
0.941	Live	46.0	48.0	2.0	Complied
0.941	Neutral	46.8	48.0	1.2	Complied
2.632	Live	34.1	48.0	13.9	Complied
2.632	Neutral	33.6	48.0	14.4	Complied
7.405	Live	22.0	48.0	26.0	Complied
7.405	Neutral	24.0	48.0	24.0	Complied
19.539	Live	22.2	48.0	25.8	Complied
19.539	Neutral	25.2	48.0	22.8	Complied

Test Of: Adaptive Broadband Ltd
AB-ACCESS Subscriber Unit (SU)
To: F.C.C. Part 15 Subpart E: 1998

7.2.2. Test Results For AC Mains Conducted Emissions: Receive Mode (continued)

7.2.2.1. Further to section 7.2.1, additional measurements were performed on frequencies within 6dB of the limit with the EUT set to each of the other 5 operating channels.

Bottom Band Bottom Channel (Channel 0)

Frequency (MHz)	Line	Q-P Level (dBmV)	Q-P Limit (dBmV)	Margin (dB)	Result
0.846	Live	45.9	48.0	2.1	Complied
0.846	Neutral	46.4	48.0	1.6	Complied
0.941	Live	46.7	48.0	1.3	Complied
0.941	Neutral	47.1	48.0	0.9	Complied

Bottom Band Top Channel (Channel 4)

Frequency (MHz)	Line	Q-P Level (dBmV)	Q-P Limit (dBmV)	Margin (dB)	Result
0.846	Live	45.9	48.0	2.1	Complied
0.846	Neutral	46.4	48.0	1.4	Complied
0.941	Live	46.7	48.0	1.3	Complied
0.941	Neutral	47.1	48.0	0.9	Complied

Middle Band Bottom Channel (Channel 5)

Frequency (MHz)	Line	Q-P Level (dBmV)	Q-P Limit (dBmV)	Margin (dB)	Result
0.846	Live	45.9	48.0	2.1	Complied
0.846	Neutral	46.4	48.0	1.6	Complied
0.941	Live	46.7	48.0	1.3	Complied
0.941	Neutral	47.1	48.0	0.9	Complied

Test Of: Adaptive Broadband Ltd
AB-ACCESS Subscriber Unit (SU)
To: F.C.C. Part 15 Subpart E: 1998

7.2.3. Test Results For AC Mains Conducted Emissions: Receive Mode (continued)**Middle Band Top Channel (Channel 9)**

Frequency (MHz)	Line	Q-P Level (dBmV)	Q-P Limit (dBmV)	Margin (dB)	Result
0.846	Live	45.8	48.0	2.2	Complied
0.846	Neutral	46.4	48.0	1.6	Complied
0.941	Live	46.7	48.0	1.3	Complied
0.941	Neutral	47.1	48.0	0.9	Complied

Top Band Bottom Channel (Channel 10)

Frequency (MHz)	Line	Q-P Level (dBmV)	Q-P Limit (dBmV)	Margin (dB)	Result
0.846	Live	45.9	48.0	2.1	Complied
0.846	Neutral	46.4	48.0	1.6	Complied
0.941	Live	46.7	48.0	1.3	Complied
0.941	Neutral	47.0	48.0	1.0	Complied

Test Of: Adaptive Broadband Ltd
AB-ACCESS Subscriber Unit (SU)
To: F.C.C. Part 15 Subpart E: 1998

7.3. Test Results For AC Mains Conducted Emissions: Transmit Mode

7.3.1. Quasi-Peak Detector Measurements On Live And Neutral Lines

7.3.1.1. Measurements were performed to FCC Part 15.207 (Intentional Radiators)

7.3.1.2. Plots of the initial scans can be found in Appendix 4.

7.3.1.3. Preliminary conducted spurious emission scans were performed with the EUT set to all 6 channels stated in section 5.2. These preliminary scans showed similar emission levels for each of the channels. Therefore final conducted emission measurements were performed with the EUT set to Top Band Top Channel (Channel 14).

7.3.1.4. The following table lists frequencies at which emissions were measured using a Quasi-Peak detector:

Top Band Top Channel (Channel 14)

Frequency (MHz)	Line	Q-P Level (dBmV)	Q-P Limit (dBmV)	Margin (dB)	Result
0.658	Live	35.7	48.0	12.3	Complied
0.658	Neutral	36.4	48.0	11.6	Complied
0.846	Live	45.9	48.0	2.1	Complied
0.846	Neutral	46.4	48.0	1.6	Complied
0.941	Live	45.4	48.0	2.6	Complied
0.941	Neutral	45.9	48.0	2.1	Complied
2.632	Live	34.1	48.0	13.9	Complied
2.632	Neutral	32.3	48.0	15.7	Complied
7.405	Live	21.3	48.0	26.7	Complied
7.405	Neutral	29.5	48.0	18.5	Complied
19.539	Live	25.2	48.0	22.8	Complied
19.539	Neutral	28.1	48.0	19.9	Complied

Test Of: Adaptive Broadband Ltd
AB-ACCESS Subscriber Unit (SU)
To: F.C.C. Part 15 Subpart E: 1998

7.3.2. Test Results For AC Mains Conducted Emissions: Transmit Mode (continued)

7.3.2.1. Further to section 7.3.1, additional measurements were performed on frequencies within 6dB of the limit with the EUT set to each of the other 5 operating channels.

Bottom Band Bottom Channel (Channel 0)

Frequency (MHz)	Line	Q-P Level (dBmV)	Q-P Limit (dBmV)	Margin (dB)	Result
0.846	Live	45.9	48.0	2.1	Complied
0.846	Neutral	46.1	48.0	1.9	Complied
0.941	Live	45.5	48.0	2.5	Complied
0.941	Neutral	46.0	48.0	2.0	Complied

Bottom Band Top Channel (Channel 4)

Frequency (MHz)	Line	Q-P Level (dBmV)	Q-P Limit (dBmV)	Margin (dB)	Result
0.846	Live	45.9	48.0	2.1	Complied
0.846	Neutral	46.1	48.0	1.9	Complied
0.941	Live	45.5	48.0	2.5	Complied
0.941	Neutral	46.0	48.0	2.0	Complied

Middle Band Bottom Channel (Channel 5)

Frequency (MHz)	Line	Q-P Level (dBmV)	Q-P Limit (dBmV)	Margin (dB)	Result
0.846	Live	45.9	48.0	2.1	Complied
0.846	Neutral	46.1	48.0	1.9	Complied
0.941	Live	45.5	48.0	2.5	Complied
0.941	Neutral	46.0	48.0	2.0	Complied

Test Of: Adaptive Broadband Ltd
AB-ACCESS Subscriber Unit (SU)
To: F.C.C. Part 15 Subpart E: 1998

7.3.3. Test Results For AC Mains Conducted Emissions: Transmit Mode (continued)**Middle Band Top Channel (Channel 9)**

Frequency (MHz)	Line	Q-P Level (dBmV)	Q-P Limit (dBmV)	Margin (dB)	Result
0.846	Live	45.9	48.0	2.1	Complied
0.846	Neutral	46.1	48.0	1.9	Complied
0.941	Live	45.5	48.0	2.5	Complied
0.941	Neutral	46.0	48.0	2.0	Complied

Top Band Bottom Channel (Channel 10)

Frequency (MHz)	Line	Q-P Level (dBmV)	Q-P Limit (dBmV)	Margin (dB)	Result
0.846	Live	45.9	48.0	2.1	Complied
0.846	Neutral	46.1	48.0	1.9	Complied
0.941	Live	45.5	48.0	2.5	Complied
0.941	Neutral	46.0	48.0	2.0	Complied

Test Of: Adaptive Broadband Ltd
AB-ACCESS Subscriber Unit (SU)
To: F.C.C. Part 15 Subpart E: 1998

7.4. Test Results For Radiated Emissions: Receive Mode

7.4.1. Electric Field Strength Measurements: 30 MHz to 1000 MHz

7.4.1.1. Measurements were performed to FCC Part 15.109 Class B (Unintentional Radiators)

7.4.1.2. The client has stated that the highest clock frequency for the EUT was 4.9025 GHz. Therefore tests were performed up to 26.0 GHz.

7.4.1.3. Preliminary radiated spurious emission scans were performed with the EUT set to all 6 channels stated in section 5.2. These preliminary scans showed similar emission levels for each of the channels. Therefore final radiated emission measurements were performed with the EUT set to Middle Band Top Channel (Channel 9).

7.4.1.4. Plots of the initial scans can be found in Appendix 4.

7.4.1.5. The following table lists frequencies at which emissions were measured using a Quasi-Peak detector at a test distance of 3m (results incorporate antenna factors and cable losses):

Middle Band Top Channel (Channel 9)

Frequency (MHz)	Ant. Pol.	Q-P Level (dB _{mV/m})	Q-P Limit (dB _{mV/m})	Margin (dB)	Result
44.944	Vert.	28.0	40.0	12.0	Complied
50.000	Vert.	37.5	40.0	2.5	Complied
58.352	Vert.	17.9	40.0	22.1	Complied
66.826	Vert.	27.6	40.0	12.4	Complied
120.005	Vert.	25.5	43.5	18.0	Complied
133.651	Horiz.	23.5	43.5	20.0	Complied
150.000	Vert.	30.6	43.5	12.9	Complied
160.000	Vert.	27.2	43.5	16.3	Complied
168.023	Horiz.	33.0	43.5	10.5	Complied
200.000	Vert.	30.9	43.5	12.6	Complied
350.000	Vert.	43.7	46.0	2.3	Complied
400.000	Vert.	40.8	46.0	5.2	Complied
432.060	Vert.	39.5	46.0	6.5	Complied
480.169	Vert.	38.1	46.0	7.9	Complied

Test Of: Adaptive Broadband Ltd
AB-ACCESS Subscriber Unit (SU)
To: F.C.C. Part 15 Subpart E: 1998

7.4.2. Test Results For Radiated Emissions: Receive Mode (continued)

7.4.2.1. Further to section 7.6.1, additional measurements were performed on frequencies within 6dB of the limit with the EUT set to each of the 2 other operating channels.

Bottom Band Bottom Channel (Channel 0)

Frequency (MHz)	Ant. Pol.	Q-P Level (dB _m V/m)	Q-P Limit (dB _m V/m)	Margin (dB)	Result
50.000	Vert.	35.2	40.0	4.8	Complied
350.000	Vert.	44.9	46.0	1.1	Complied
400.000	Vert.	41.3	46.0	4.7	Complied

Top Band Top Channel (Channel 14)

Frequency (MHz)	Ant. Pol.	Q-P Level (dB _m V/m)	Q-P Limit (dB _m V/m)	Margin (dB)	Result
50.000	Vert.	35.0	40.0	5.0	Complied
350.000	Vert.	44.9	46.0	1.1	Complied
400.000	Vert.	41.4	46.0	4.6	Complied

Test Of: Adaptive Broadband Ltd
 AB-ACCESS Subscriber Unit (SU)
 To: F.C.C. Part 15 Subpart E: 1998

7.5. Test Results For Radiated Emissions: Receive Mode

7.5.1. Electric Field Strength Measurements: 1 GHz to 26 GHz

7.5.1.1. Measurements were performed to FCC Part 15.109 Class B (Unintentional Radiators).

7.5.1.2. The client has stated that the highest clock frequency for the EUT was 4.9025 GHz. Therefore tests were performed up to 26.0 GHz.

7.5.1.3. Preliminary radiated spurious emission scans were performed with the EUT set to all 6 channels stated in section 5.2. Final radiated emission measurements were performed only if the preliminary scan showed any spurious emissions to be within 10dB of the reference limit line.

7.5.1.4. At higher frequencies, due to the limitations of the dynamic range of the measuring receiver it was not possible to perform radiated emission preliminary scans and final measurements at the specified 3m test distance. Therefore the measuring antenna was moved to a test distance of 1m. The limit was extrapolated using the factor $20 \log(d1/d2)$.

7.5.1.5. Plots of the initial scans can be found in Appendix 4.

7.5.1.6. The following tables list frequencies at which emissions were measured using Average and Peak detector functions at a test distance of 1m:

Middle Band Bottom Channel (Channel 5)

Frequency (GHz)	Antenna Polarity (H/V)	Average Detector level (dBmV)	Antenna factor (dB)	Cable loss (dB)	Actual Average Level (dBmV/m)	Average Limit (dBmV/m)	Average Margin (dB)	Result
8.753014	Vert.	23.5	30.5	2.1	56.1	63.5	7.4	Complied
8.753014	Horiz.	15.8	30.5	2.1	48.4	63.5	15.1	Complied

Frequency (GHz)	Antenna Polarity (H/V)	Peak Detector level (dBmV)	Antenna factor (dB)	Cable loss (dB)	Actual Peak Level (dBmV/m)	Peak Limit (dBmV/m)	Peak Margin (dB)	Result
8.753014	Vert.	27.7	30.5	2.1	60.3	83.5	23.2	Complied
8.753014	Horiz.	24.2	30.5	2.1	56.8	83.5	26.7	Complied

Test Of: Adaptive Broadband Ltd
 AB-ACCESS Subscriber Unit (SU)
 To: F.C.C. Part 15 Subpart E: 1998

7.5.2. Test Results For Radiated Emissions: Receive Mode (continued)**Middle Band Top Channel (Channel 9)**

Frequency (GHz)	Antenna Polarity (H/V)	Average Detector level (dBmV)	Antenna factor (dB)	Cable loss (dB)	Actual Average Level (dBmV/m)	Average Limit (dBmV/m)	Average Margin (dB)	Result
8.855013	Vert.	17.4	30.5	2.1	50.0	63.5	13.5	Complied
8.855013	Horiz.	14.2	30.5	2.1	46.8	63.5	16.7	Complied

Frequency (GHz)	Antenna Polarity (H/V)	Peak Detector level (dBmV)	Antenna factor (dB)	Cable loss (dB)	Actual Peak Level (dBmV/m)	Peak Limit (dBmV/m)	Peak Margin (dB)	Result
8.855013	Vert.	25.6	30.5	2.1	58.2	83.5	25.3	Complied
8.855013	Horiz.	21.6	30.5	2.1	54.2	83.5	29.3	Complied

Bottom Band Bottom Channel (Channel 0)

Frequency (GHz)	Antenna Polarity (H/V)	Average Detector level (dBmV)	Antenna factor (dB)	Cable loss (dB)	Actual Average Level (dBmV/m)	Average Limit (dBmV/m)	Average Margin (dB)	Result
16.588307	Vert.	13.3	33.6	3.9	50.8	63.5	12.7	Complied
16.588307	Horiz.	13.3	33.6	3.9	50.8	63.5	12.7	Complied

Frequency (GHz)	Antenna Polarity (H/V)	Peak Detector level (dBmV)	Antenna factor (dB)	Cable loss (dB)	Actual Peak Level (dBmV/m)	Peak Limit (dBmV/m)	Peak Margin (dB)	Result
16.588307	Vert.	24.2	33.6	3.9	61.7	83.5	21.8	Complied
16.588307	Horiz.	24.2	33.6	3.9	61.7	83.5	21.8	Complied

Test Of: Adaptive Broadband Ltd
 AB-ACCESS Subscriber Unit (SU)
 To: F.C.C. Part 15 Subpart E: 1998

7.6. Test Results For Radiated Emissions: Transmit Mode

7.6.1. Electric Field Strength Measurements: 30 MHz to 1000 MHz

7.6.1.1. Measurements were performed to FCC Part 15.209 (Intentional Radiators)

7.6.1.2. Preliminary radiated spurious emission scans were performed with the EUT set to all 6 channels stated in section 5.2. These preliminary scans showed similar emission levels for each of the channels. Therefore final radiated emission measurements (below 1000 MHz) were performed with the EUT set to Top Band Top Channel (Channel 14).

7.6.1.3. Plots of the initial scans can be found in Appendix 4.

7.6.1.4. The following table lists frequencies at which emissions were measured using a Quasi-Peak detector at a test distance of 3m (results incorporate antenna factors and cable losses):

Top Band Top Channel (Channel 14)

Frequency (MHz)	Ant. Pol.	Q-P Level (dB _m V/m)	Q-P Limit (dB _m V/m)	Margin (dB)	Result
46.006	Vert.	32.3	40.0	7.7	Complied
50.000	Vert.	34.4	40.0	5.6	Complied
61.413	Vert.	27.4	40.0	12.6	Complied
66.826	Vert.	29.5	40.0	10.5	Complied
100.000	Vert.	36.6	43.5	6.9	Complied
114.347	Horiz.	30.1	43.5	13.4	Complied
120.008	Vert.	24.0	43.5	19.5	Complied
133.652	Vert.	23.5	43.5	20.0	Complied
150.000	Vert.	31.1	43.5	12.4	Complied
160.000	Vert.	28.1	43.5	15.4	Complied
175.000	Vert.	34.2	43.5	9.3	Complied
200.000	Vert.	33.9	43.5	9.6	Complied
300.000	Vert.	40.0	46.0	6.0	Complied
325.000	Horiz.	23.8	46.0	22.2	Complied
350.000	Vert.	45.1	46.0	0.8	Complied
400.000	Vert.	39.6	46.0	6.4	Complied
425.000	Vert.	38.9	46.0	7.1	Complied
450.000	Vert.	37.4	46.0	8.6	Complied
475.000	Vert.	33.6	46.0	12.4	Complied

Test Of: Adaptive Broadband Ltd
AB-ACCESS Subscriber Unit (SU)
To: F.C.C. Part 15 Subpart E: 1998

7.6.2. Test Results For Radiated Emissions: Transmit Mode (continued)

7.6.2.1. Further to section 7.8.1, additional measurements were performed on frequencies within 6dB of the limit with the EUT set to each of the 2 other operating channels.

Bottom Band Bottom Channel (Channel 0)

Frequency (MHz)	Ant. Pol.	Q-P Level (dB _m V/m)	Q-P Limit (dB _m V/m)	Margin (dB)	Result
50.000	Vert.	35.6	40.0	4.4	Complied
350.000	Vert.	44.2	46.0	1.8	Complied
400.000	Vert.	41.9	46.0	4.1	Complied

Middle Band Top Channel (Channel 9)

Frequency (MHz)	Ant. Pol.	Q-P Level (dB _m V/m)	Q-P Limit (dB _m V/m)	Margin (dB)	Result
50.000	Vert.	35.6	40.0	4.4	Complied
350.000	Vert.	45.7	46.0	0.3	Complied
400.000	Vert.	43.9	46.0	2.1	Complied

7.7. Test Results For Radiated Emissions: Transmit Mode

7.7.1. Effective Isotropic Radiated Power Measurements: 5.0 GHz to 6.0 GHz.

7.7.1.1. Measurements were performed to FCC Part 15.407(a) (Unlicensed National Information Infrastructure Devices).

7.7.1.2. The client has stated that the EUT operated in the frequency ranges of 5.15 to 5.25 GHz, 5.25 to 5.35 GHz, and 5.725 to 5.825 GHz. Measurements were performed at both bottom and top channels within each band.

7.7.1.3. The EUT was configured with a permanently connected antenna. The client has stated that the directional gain of the antenna is 18dBi. EIRP measurements were performed to determine the output power levels of the EUT, and the limit was increased by 6dB to compensate for the antenna being connected. The specified limit includes the 6dB antenna gain.

7.7.1.4. It was possible to polarise the antenna incorporated within the EUT for both vertical and horizontal polarisation's. Therefore EIRP measurements were performed with the antenna polarised in both planes.

7.7.1.5. Results are shown for the EUT operating on each of the 6 channels stated in section 5.2. Measurements are shown for both transmit power levels and peak power spectral density. Plots showing the characteristics of the transmitter output can be seen in Appendix 4.

7.7.1.6. In addition to the measurements stated in section 7.10.1.5, additional results were calculated for the ratio of the peak excursion of the modulation envelope as stated in FCC Part 15.407(a[6]).

Test Of: Adaptive Broadband Ltd
AB-ACCESS Subscriber Unit (SU)
To: F.C.C. Part 15 Subpart E: 1998

Results: Peak Transmit Power Levels

Tx Band (GHz)	Channel	Tx Antenna	Measured Peak EIRP (dBm)	Limit (dBm) (Includes 6dBi Antenna Gain for EIRP)	Bandwidth (MHz)	Plot No.	Result
5.15 – 5.25	Bottom (0)	Horiz.	15.41	22.29	16.9444	075	Complied
5.15 – 5.25	Bottom (0)	Vert.	14.35	22.29	16.9444	076	Complied
5.15 – 5.25	Top (4)	Vert.	15.59	22.29	16.8333	077	Complied
5.15 – 5.25	Top (4)	Horiz.	17.09	22.29	16.8333	078	Complied
5.25 – 5.35	Bottom (5)	Horiz.	23.99	29.26	16.8333	079	Complied
5.25 – 5.35	Bottom (5)	Vert.	26.00	29.26	16.8333	080	Complied
5.25 – 5.35	Top (9)	Vert.	25.14	29.20	16.6111	081	Complied
5.25 – 5.35	(Top (9)	Horiz.	24.12	29.22	16.6666	082	Complied
5.725 – 5.825	Bottom (10)	Horiz.	29.91	35.28	16.8888	083	Complied
5.725 – 5.825	Bottom (10)	Vert.	30.87	35.28	16.8888	084	Complied
5.725 – 5.825	Top (14)	Vert.	30.75	35.22	16.6666	085	Complied
5.725 – 5.825	Top (14)	Horiz.	29.58	35.22	16.6666	086	Complied

Test Of: Adaptive Broadband Ltd
AB-ACCESS Subscriber Unit (SU)
To: F.C.C. Part 15 Subpart E: 1998

Results: Peak Power Spectral Density (PPSD)

Tx Band (GHz)	Channel	Tx Antenna	Measured PPSD (EIRP) (dBm/MHz)	Limit (dBm/MHz) (Includes 6dBi Antenna Gain for EIRP)	Plot No.	Result
5.15 – 5.25	Bottom (0)	Horiz	9.2	10.0	075	Complied
5.15 – 5.25	Bottom (0)	Vert.	7.6	10.0	076	Complied
5.15 – 5.25	Top (4)	Vert.	7.2	10.0	077	Complied
5.15 – 5.25	Top (4)	Horiz.	8.3	10.0	078	Complied
5.25 – 5.35	Bottom (5)	Horiz.	16.4	17.0	079	Complied
5.25 – 5.35	Bottom (5)	Vert.	16.8	17.0	080	Complied
5.25 – 5.35	Top (9)	Vert.	16.8	17.0	081	Complied
5.25 – 5.35	Top (9)	Horiz.	15.8	17.0	082	Complied
5.725 – 5.825	Bottom (10)	Horiz.	22.0	23.0	083	Complied
5.725 – 5.825	Bottom (10)	Vert.	22.3	23.0	084	Complied
5.725 – 5.825	Top (14)	Vert.	22.6	23.0	085	Complied
5.725 – 5.825	Top (14)	Horiz.	21.9	23.0	086	Complied

Test Of: Adaptive Broadband Ltd
AB-ACCESS Subscriber Unit (SU)
To: F.C.C. Part 15 Subpart E: 1998

Results: Ratio of Peak Excursion of the Modulation Envelope

Tx Band (GHz)	Channel	Tx Ant	Measured Peak EIRP (dBm)	Measured PPSD (EIRP) (dBm/MHz)	Ratio: Peak Excursion	Limit (dB)	Result
5.15 – 5.25	Bottom (0)	Horiz	15.41	9.2	6.21	13.0	Complied
5.15 – 5.25	Bottom (0)	Vert.	14.35	7.6	6.75	13.0	Complied
5.15 – 5.25	Top (4)	Vert.	15.59	7.2	8.39	13.0	Complied
5.15 – 5.25	Top (4)	Horiz.	17.09	8.3	8.79	13.0	Complied
5.25 – 5.35	Bottom (5)	Horiz.	23.99	16.4	7.59	13.0	Complied
5.25 – 5.35	Bottom (5)	Vert.	26.00	16.8	9.20	13.0	Complied
5.25 – 5.35	Top (9)	Vert.	25.14	16.8	8.34	13.0	Complied
5.25 – 5.35	Top (9)	Horiz.	24.12	15.8	8.32	13.0	Complied
5.725 – 5.825	Bottom (10)	Horiz.	29.91	22.0	7.91	13.0	Complied
5.725 – 5.825	Bottom (10)	Vert.	30.87	22.3	8.57	13.0	Complied
5.725 – 5.825	Top (14)	Vert.	30.75	22.6	8.15	13.0	Complied
5.725 – 5.825	Top (14)	Horiz.	29.58	21.9	7.68	13.0	Complied

7.8. Test Results For Radiated Emissions: Transmit Mode

7.8.1. Effective Isotropic Radiated Power Spurious Measurements: 1.0 GHz to 40.0 GHz.

7.8.1.1. Measurements were performed to FCC Part 15.407(b) (Unlicensed National Information Infrastructure Devices).

7.8.1.2. The client has stated that the highest clock frequency for the EUT was 5.825 GHz. Therefore tests were performed up to 40.0 GHz.

7.8.1.3. Preliminary EIRP scans were performed with the EUT operating on each of the 6 channels stated in section 5.2. Plots showing the spurious (undesirable) emission levels can be seen in Appendix 4.

7.8.1.4. The EUT was configured with a permanently connected antenna. It was possible to polarise the antenna for both vertical and horizontal polarisation's. Therefore EIRP measurements were performed with the antenna polarised in both planes.

Results:

7.8.1.5. Preliminary scans were performed with the EUT operated on each of the 6 channels stated in section 5.2. It can be shown from the plots (Plots 087 to 158) that all emissions outside of the transmitter band edges are of at least 6dB from the reference limit line. Therefore no final measurements were performed.

7.8.1.6. All preliminary scans (Plots 087 to 158) can be seen in Appendix 4.

Test Of: Adaptive Broadband Ltd
 AB-ACCESS Subscriber Unit (SU)
 To: F.C.C. Part 15 Subpart E: 1998

7.9. Test Results For Frequency Stability: Transmit Mode

7.9.1. Measurements for frequency stability were performed in accordance with FCC Part 15.407 (g) of C.F.R. 47:1997.

7.9.2. Measurements were performed over the temperature range of -20°C to +50°C at the nominal operating voltage, and over an operating voltage of 85% to 115% at +20°C.

7.9.3. The client has specified that due to the transmission of broadband data centred around the nominal carrier frequency of the EUT, measurements of any 'drift' are virtually impossible. However valid measurements would be possible by observing the drift on the main local oscillator, which is 902.5 MHz below the nominal centre frequency. All oscillators within the EUT are referenced to a single source and so any drift can be easily quantified. Also due to the integrated nature of the antenna, and its associated gain/frequency response, any 'drift' can be observed whilst operating at the top frequency of the U-NII band (Channel 14).

7.9.4. Measurements for frequency drift were performed with the EUT operating on Channel 14. A plot (Plot 169) of the frequency stability was performed, with the EUT supply voltage, varied from 85% to 110%, and then up to 115%. At all times the ambient temperature was maintained at +20°C. A further plot (Plot 170) was performed to show the frequency stability of the EUT, with the ambient temperature varied from -20°C to +20°C, and then to +50°C. The supply voltage to the EUT remained at a constant 115V. The plots of both measurements can be seen in Appendix 4.

Results: Supply Variation

Nominal Operating Frequency	Frequency Deviation @ +20 °C			Limit (±10ppm)	Result
	85% Supply Voltage	100% Supply Voltage	115% Supply Voltage		
4.9025 GHz	< 1 kHz	< 1 kHz	< 1 kHz	49 kHz	Complied

Results: Temperature Variation

Nominal Operating Frequency	Frequency Deviation @ 115 V			Limit (±10ppm)	Result
	-20 °C	+20 °C	+50 °C		
4.9025 GHz	< 1 kHz	< 1 kHz	< 5 kHz	49 kHz	Complied

Test Of: Adaptive Broadband Ltd
AB-ACCESS Subscriber Unit (SU)
To: F.C.C. Part 15 Subpart E: 1998

8. Measurement Uncertainty

8.1. Company Policy, as based on the NAMAS Accreditation Standard, M10, paragraph 12.11 (o), states that Test Reports shall include estimated uncertainty of the calibration or test result (this information need only appear in test reports and test certificates where it is relevant to the validity or application of the test result, where a client's instructions so require or where uncertainty affects compliance to a specification or limit).

8.2. The global uncertainties have been calculated in accordance with NAMAS NIS 81 (Edition 1, May 1994) as follows:

Measurement Type	Range	Confidence Level	Calculated Uncertainty
Conducted Emissions	0.15 MHz to 30 MHz	95%	+/- 2.2 dB
Radiated Field Strength Emissions	30 MHz to 1000 MHz	95%	+/- 4.9 dB
Radiated Field Strength Emissions	1.0 GHz to 26.0 GHz	95%	+/- 4.0 dB
Effective Isotropic Radiated Power	1.0 GHz to 40.0 GHz	95%	+/- 4.0 dB
Frequency Stability	N/A	95%	+/- 4.2 dB

8.3. Measurement uncertainties have been applied in accordance with NAMAS document NIS 81 (edition 1, May 1994), and in the absence of any specification criteria, guidance, or code of practice, compliance has been judged on the basis of shared risk.

8.4. In the case of emissions tests, the measured value of the disturbance from the product sample shall be compared directly with the limits. If the measured value is equal to or less than the limit the product is deemed to pass the test.

8.5. In the case of immunity tests, the equipment is deemed to pass the test if it fulfils the stated performance criteria at the required or a higher severity level. The measurement uncertainty has been taken into account in the calibration procedures stated in the relevant basic standard.

8.6. The methods used to calculate the above uncertainties are in line with those used for calibration laboratories contained in NAMAS document NIS 3003 Edition 8 "The Expression of Uncertainty and Confidence in Measurement" May 1995, which align with international recommendations "Guide to the Expression of Uncertainty in Measurement" ISO/IEC/OIML/BIPM (Prepared by ISO/TAG 4: January 1993).

Test Of: Adaptive Broadband Ltd
 AB-ACCESS Subscriber Unit (SU)
 To: F.C.C. Part 15 Subpart E: 1998

Appendix 1. Test Equipment Used

Instrument	Manufacturer	Model	RFI No.
Conducted Emissions:			
L.I.S.N. (1 ph.)	R & S	ESH3-Z5	A004
Pulse Limiter	R & S	ESH3-Z32	A287
Test Receiver	R & S	ESMI	M069
Plotter	H.P.	7440A	P001
Radiated Electric Field Emissions			
Bilog Antenna	Chase	CBL6111	A259
3dB Attenuator	Narda	771003	A262
Bilog Antenna	Chase	CBL6111	A490
Cable	Rosenberger	UFA210A-1-1182-704704	C460
Cable	Rosenberger	UFA210A-1-1182-704704	C461
Test Receiver	R & S	ESVP	M002
Spectrum Monitor	R & S	EZM	M003
Test Receiver	R & S	ESMI	M069
1.0 to 2.0 GHz Horn	Eaton	9188-2	A028
2.0 to 4.0 GHz Horn	Eaton	91889-2	A031
4.0 to 6.0 GHz Horn	Flann	12240-20	A428
6.0 to 8.2 GHz Horn	Narda	642	A439
8.2 to 12.5 GHz Horn	Narda	640	A437
12.5 to 18.0 GHz Horn	Flann	18240-20	A430
18.0 to 26.0 GHz Horn	Flann	20240-20	A436

Test Of: Adaptive Broadband Ltd
 AB-ACCESS Subscriber Unit (SU)
 To: F.C.C. Part 15 Subpart E: 1998

Test Equipment Used (continued)

Effective Isotropic Radiated Power			
Test Receiver	R & S	ESMI	M069
Cable	Rosenberger	UFA210A-1-1182-704704	C460
Cable	Rosenberger	UFA210A-1-1182-704704	C461
1.0 to 2.0 GHz Horn	Eaton	9188-2	A028
2.0 to 4.0 GHz Horn	Eaton	91889-2	A031
4.0 to 6.0 GHz Horn	Flann	12240-20	A428
6.0 to 8.2 GHz Horn	Narda	642	A439
8.2 to 12.5 GHz Horn	Narda	640	A437
12.5 to 18.0 GHz Horn	Flann	18240-20	A430
18.0 to 26.0 GHz Horn	Flann	20240-20	A436
26.0 to 40.0 GHz Horn	Flann	22240-20	A435
Harmonic Mixer	-	-	W152
Frequency Stability			
Test Receiver	R & S	ESMI	M069
Cable	Rosenberger	UFA210A-1-1182-704704	C460
4.0 to 6.0 GHz Horn	Flann	12240-20	A428
Environmental Test Chamber	Prolan	PV427H75F 30HV	E007

NB In accordance with NAMAS requirements, all the measurement equipment is on a calibration schedule.

Appendix 2. Measurement Methods

A2.1. AC Mains Conducted Emissions: FCC Part 15

A2.1.1. AC mains conducted emissions measurements were performed in accordance with the standard, against appropriate limits for each detector function.

A2.1.2. The test was performed in a shielded enclosure with the equipment arranged as detailed in the standard on a wooden bench using the floor of the screened enclosure as the ground reference plane and with the EUT powered via a 115 V 60 Hz AC mains supply.

A2.1.3. Initial measurements in the form of swept scans covering the entire measurement band were performed in order to identify frequencies on which the EUT was generating interference. In order to minimise the time taken for these swept measurements, a Peak detector was used in conjunction with the appropriate detector IF measuring bandwidths (see table below). Repetitive scans were performed to allow for emissions with low repetition rates, and the duty cycle of the EUT. The test configuration was the same for the initial scans as for the final measurements.

A2.1.4. Following the initial scans, a graph was produced giving an overview of the emissions from the EUT plotted against the appropriate specification limit. A tolerance line was set 6 dB below the specification limit and levels above the tolerance line were re-tested (at individual frequencies) using the appropriate detector function.

A2.1.5. The test equipment settings for conducted emissions measurements were as follows:

Receiver Function	Initial Scan	Final Measurements
Detector Type:	Peak	Quasi-Peak (CISPR)*
Mode:	Max Hold	Not applicable
Bandwidth:	10 kHz	9 kHz
Amplitude Range:	60 dB	20 dB
Measurement Time:	Not applicable	> 1 s
Observation Time:	Not applicable	> 15 s
Step Size:	Continuous sweep	Not applicable
Sweep Time:	Coupled	Not applicable

* In some instances an Average detector function may also have been used.

A2.2. Radiated Field Strength Emissions

A2.2.1. Radiated emissions measurements were performed in accordance with the standard, against appropriate limits for each detector function.

A2.2.2. Initial measurements covering the entire measurement band in the form of swept scans in a shielded enclosure (for frequencies below 4 GHz) or on an open area test site (for frequencies above 4 GHz) were performed in order to identify frequencies on which the EUT was generating interference. This determined the frequencies on which the EUT should be re-measured in full on the open area test site. In order to minimise the time taken for the swept measurements, a Peak detector was used in conjunction with the appropriate detector IF measuring bandwidth (see table below). Repetitive scans were performed to allow for emissions with low repetition rates, and for the duty cycle of the EUT. The test configuration was the same for the initial scans as for the final measurements.

A2.2.3. The initial scans were performed using an antenna height of 1.5 m and a measurement distance of 3 m. Where (at higher frequencies) the noise floor was found to be of a higher level, a test distance of 1m was used. Following the initial scans, graphs were produced giving an overview of the emissions from the EUT plotted against the appropriate specification limit. A tolerance line was set 6 dB below the specification limit and levels above the tolerance line were re-tested on the open area test site, at the appropriate distance, using a measuring receivers with a Quasi-Peak detector (below 1000 MHz), where applicable, for measurements above 1000 MHz average and peak detectors were used.

A2.2.4. For the main (final) measurements the EUT was arranged on a non-conducting table on an open area test site, as detailed in the specification.

A2.2.5. All measurements on the open area test site were performed using broadband antennas.

A2.2.6. On the open area test site, at each frequency where a signal was found, the levels were maximised by initially rotating the turntable through 360°. In addition, for frequencies below 1000 MHz, the antenna height was varied between 1 and 4 m. For frequencies above 1000 MHz, the antenna was fixed at a height of 1.5m. At this point, any signals found to be between the limit and a level 6 dB below it were further maximised by changing the configuration of the EUT, e.g. re-routing cables to peripherals and moving peripherals with respect to the EUT.

Test Of: Adaptive Broadband Ltd
AB-ACCESS Subscriber Unit (SU)
To: F.C.C. Part 15 Subpart E: 1998

A2.2.7. The test equipment settings for radiated emissions measurements were as follows:

Receiver Function	Initial Scan Below 1GHz	Final Measurements Below 1GHz
Detector Type:	Peak	Quasi-Peak (CISPR)
Mode:	Max Hold	Not applicable
Bandwidth:	120 kHz	120 kHz
Amplitude Range:	60 dB	20 dB
Measurement Time:	Not applicable	> 1 s
Observation Time:	Not applicable	> 15 s
Step Size:	Continuous sweep	Not applicable
Sweep Time:	Coupled	Not applicable

Receiver Function	Initial Scan Above 1GHz	Final Measurements Above 1 GHz
Detector Type:	Peak	Peak/Average
Mode:	Max Hold	Not applicable
Bandwidth:	1 MHz	1 MHz
Amplitude Range:	60 dB	20 dB (typical)
Measurement Time:	Not applicable	> 1 s
Observation Time:	Not applicable	> 15 s
Step Size:	Continuous sweep	Not applicable
Sweep Time:	Coupled	Not applicable

A.2.3.Effective Isotropic Radiated Power Measurements: 5.0 GHz to 6.0 GHz.

A.2.3.1. Effective Isotropic Radiated Power measurements were performed in accordance with the standard, against the appropriate limits on an open area test site.

A.2.3.2. The EUT was set to transmit on the required channel at maximum transmit power. The channels stated in section 5.2 were tested. The EUT was configured with a permanently attached antenna. Therefore radiated power measurements were performed.

A.2.3.3. The EUT was mounted on a non-metallic table at a 1 m test height. The receive (test) antenna was placed at a test distance of 2m. The EUT was set to operate at the required channel and the exact frequency recorded. A substitution measurement was then performed to determine the loss of the test set-up. (Details of the substitution method can be seen in Appendix A.2.6.).

A.2.3.4. The level recorded for the substitution method was entered as a level offset in the measuring receiver. Initial measurements covering the entire measurement band were performed in the form of a swept scan. In order to minimise the time taken for the swept measurements, a Peak detector was used in conjunction with the appropriate detector IF measuring bandwidth (1MHz). Repetitive scans were performed to allow for emissions with low repetition rates, and for the duty cycle of the EUT. The EUT was rotated through 360° to maximise all emissions. The test was performed with the EUT integral antenna set for both horizontal and vertical polarisations. The test antenna was also set for both polarities.

A.2.3.5. The measured Peak Transmit Power and the Power Spectral Density could then be determined.

A.2.3.6. The EUT was set to the next channel and sections A.2.3.2. to A.2.3.5. were repeated.

A.2.4. Effective Isotropic Radiated Power Spurious Measurements: 1.0 GHz to 40.0 GHz.

A.2.4.1. Effective Isotropic Radiated Power Spurious measurements were performed in accordance with the standard, against the appropriate limits on an open area test site.

A.2.4.2. The EUT was set to transmit on the required transmit channel at maximum transmit power. The channels stated in section 5.2 were tested. The EUT was configured with a permanently attached antenna. Therefore radiated power measurements were performed.

A.2.4.3. The EUT was mounted on a non-metallic table at a 1.5m test height. The receive (test) antenna was placed at a test distance of 2m. For each of the frequency ranges performed, a substitution method was performed to determine the worst case loss of the test set-up. (Details of the substitution method can be seen in Appendix A.2.6.)

A.2.4.4. The level recorded for the substitution method was entered as a level offset in the measuring receiver. Initial measurements covering the entire measurement band were performed in the form of a swept scan (For frequencies below 4 GHz, initial scans were performed in a shielded enclosure). In order to minimise the time taken for the swept measurements, a Peak detector was used in conjunction with the appropriate detector IF measuring bandwidth (1MHz). Repetitive scans were performed to allow for emissions with low repetition rates, and for the duty cycle of the EUT. The EUT was rotated through 360° to maximise all emissions. The test was performed with the EUT integral antenna set for both horizontal and vertical polarisation. The test antenna was also set for both polarities.

A.2.4.5. The maximum emission level obtained in dBm/MHz could then be determined. Any levels which were found to be within 6dB of the reference limit line were re-measured with a substitution measurement being performed.

A.2.4.6. The EUT was set to the next channel and sections A.2.4.2. to A.2.4.5. were repeated.

A2.5. Frequency Stability

A.2.5.1. Measurements were performed to determine the frequency stability against the specified limits.

A.2.5.2. An environmental test chamber was used to perform the testing required.

A.2.5.3. The EUT was situated inside the environmental test chamber and the required temperature (starting from the lowest level) was allowed to settle prior to switching on the EUT.

A.2.5.4. The EUT was switched on and the relevant frequency was recorded. The EUT was left switched on and measurements were performed after 2, 5 and 10 minutes.

A2.5.5. Frequency and RF output power measurements were then made at intervals of one minute for a duration of 10 minutes whilst maintaining the required temperature.

A2.5.6. The EUT was then switched off for a minimum of 30 minutes and the environmental chamber was allowed to stabilise at the next temperature. Points A2.5.3. to A2.5.5. were then repeated.

A.2.5.7. The test chamber was then allowed to stabilise at +20°C for a minimum of 30 minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency recorded.

A.2.6. Substitution Methods

A.2.6.1. The equipment is configured as illustrated in Appendix 4.

A.2.6.2. The EUT is replaced by an in-band antenna connected to a signal generator tuned to the frequency of interest. A 10dB attenuator was connected to improve matching.

A.2.6.3. The transmit and receive antennas were vertically polarised at a fixed height of 1.5 metres.

A.2.6.4. The signal generator level is then adjusted to give a level equal to that obtained from the EUT.

A.2.6.5. The radiated power is given by the formula below.

$$\text{True Signal level} = \text{Signal Generator Level} - \sum L + Ag$$

where:

$\sum L$ is the sum of the losses, i.e. cable loss.

Ag is the isotropic gain of the antenna.

A.2.6.6. The measurement shall be repeated for horizontal polarisation.


Appendix 3. Test Configuration Drawings

This appendix contains the following drawings:


Drawing Reference Number	Title
DRG\38658ETF03\EMICON	Test configuration for measurement of conducted emissions
DRG\38658ETF03\EMIRAD	Test configuration for measurement of radiated emissions
DRG\38658ETF03\001	Schematic diagram of the EUT, support equipment and interconnecting cables used for the test
DRG\38658ETF03\002	Substitution measurement test set-up

Test Of: Adaptive Broadband Ltd
AB-ACCESS Subscriber Unit (SU)
To: F.C.C. Part 15 Subpart E: 1998

DRG\38658ETF03\EMICON

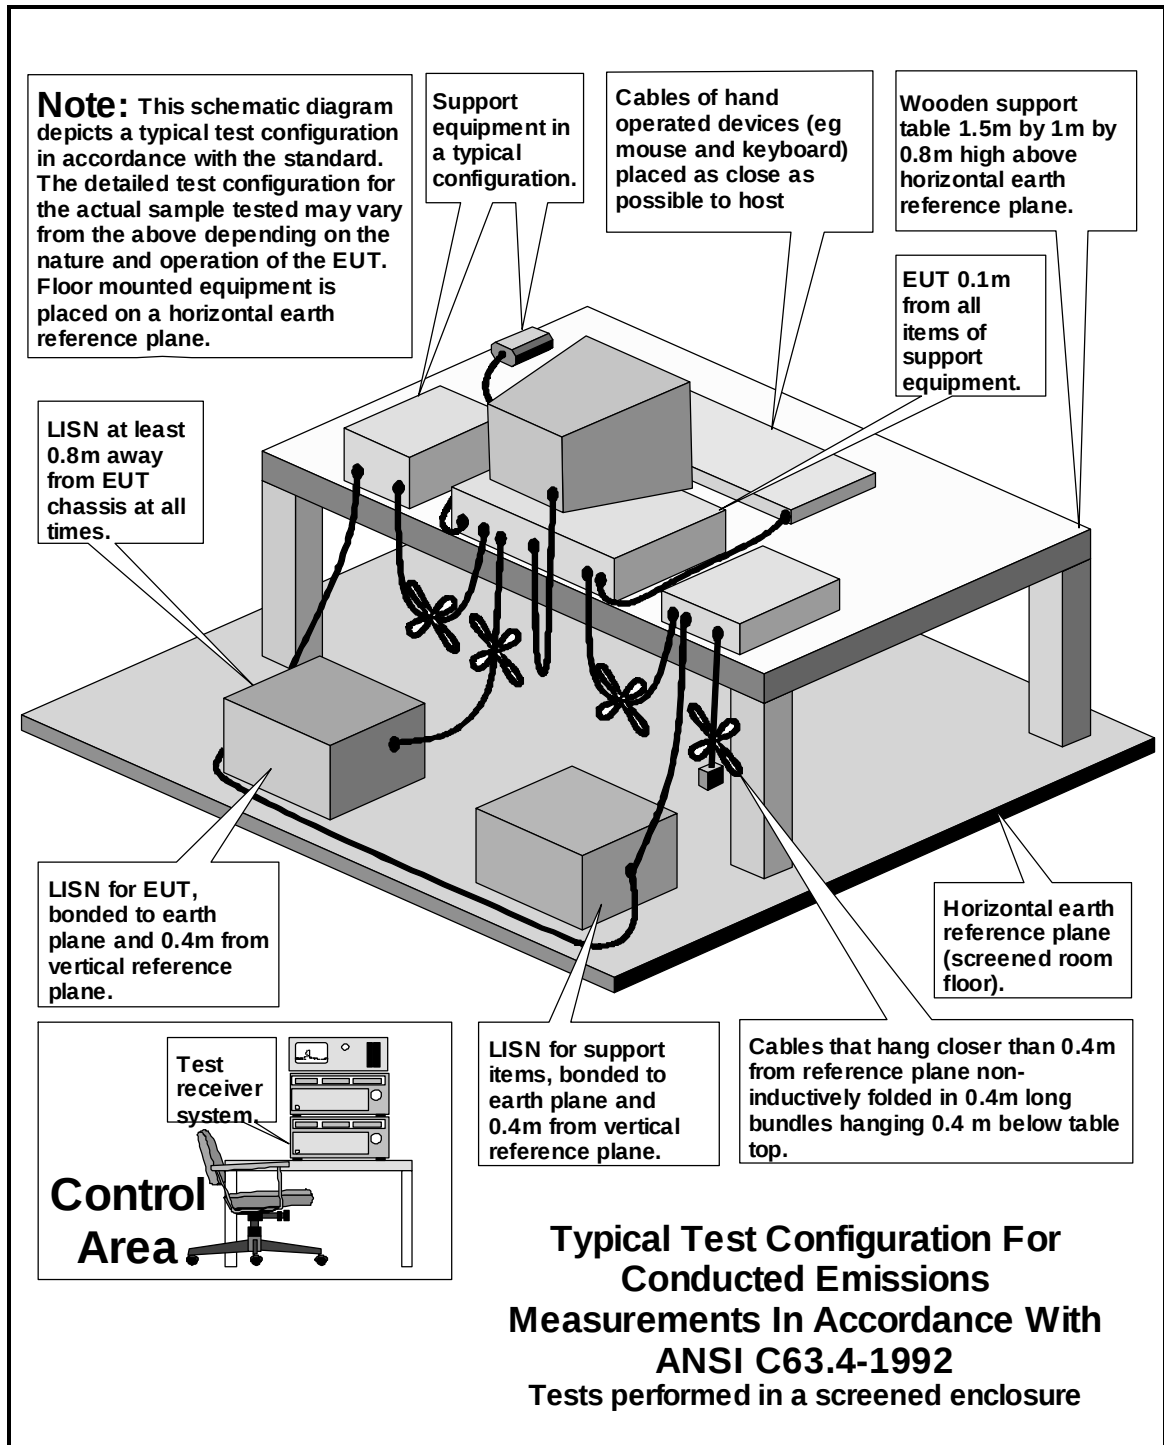


DRG\38658ETF03\EMIRAD

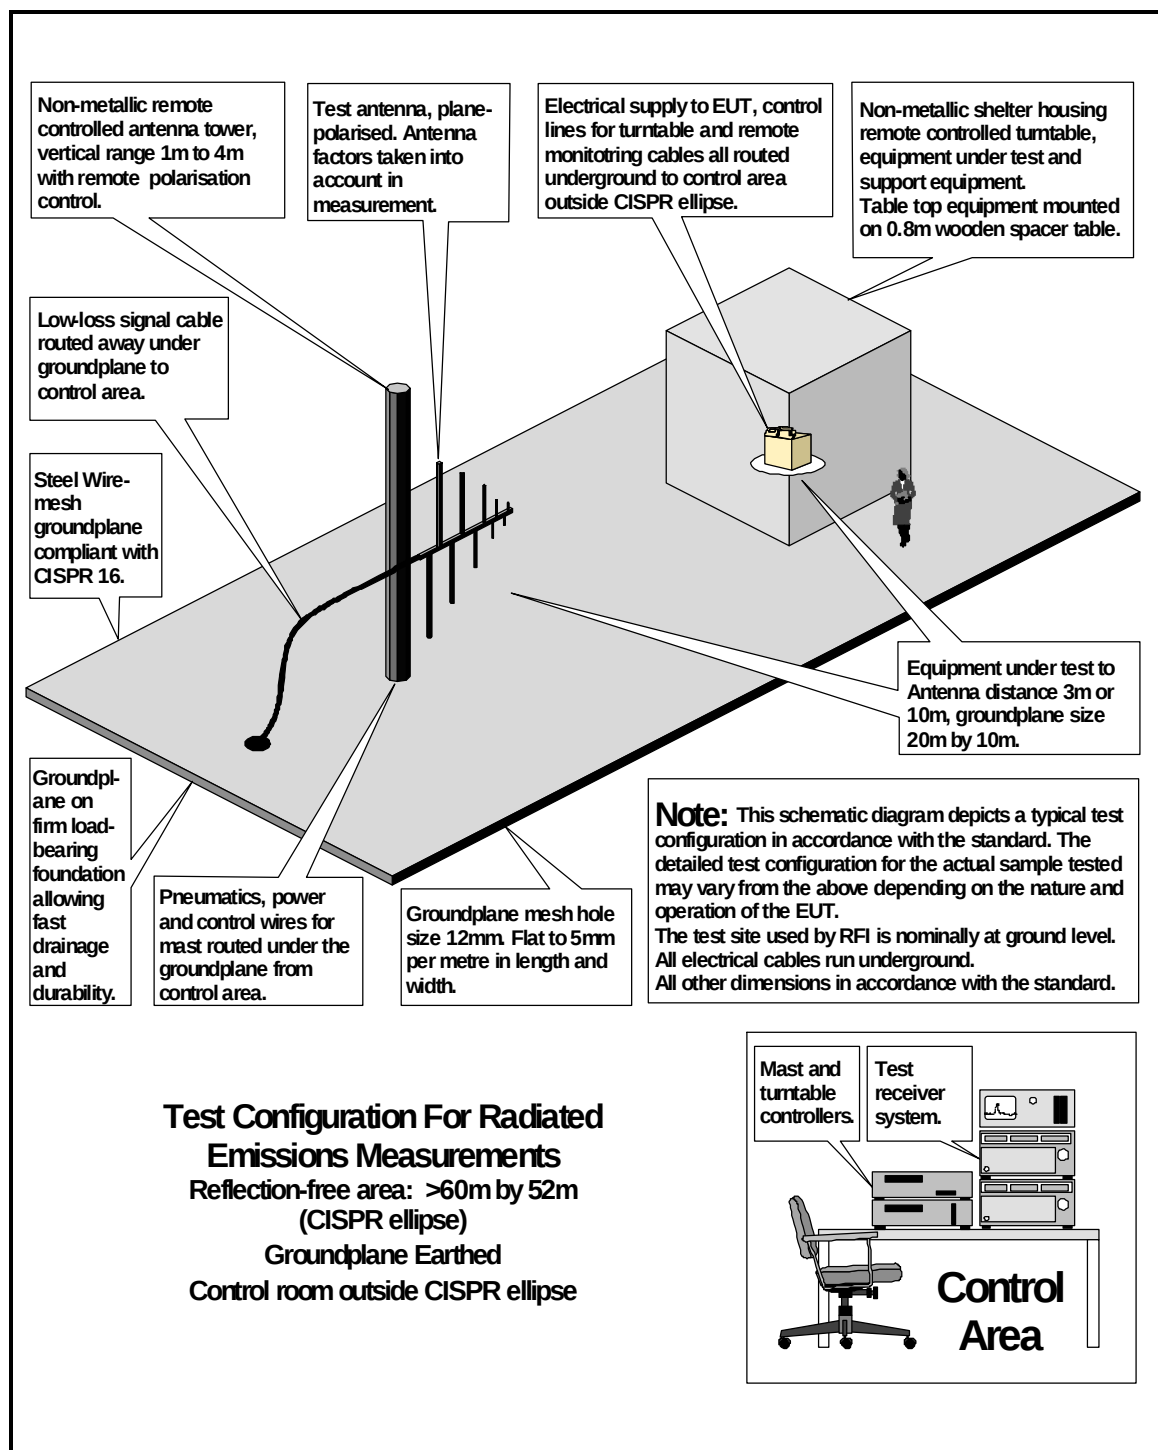


Test Of: Adaptive Broadband Ltd
AB-ACCESS Subscriber Unit (SU)
To: F.C.C. Part 15 Subpart E: 1998

DRG\38658ETF03\001

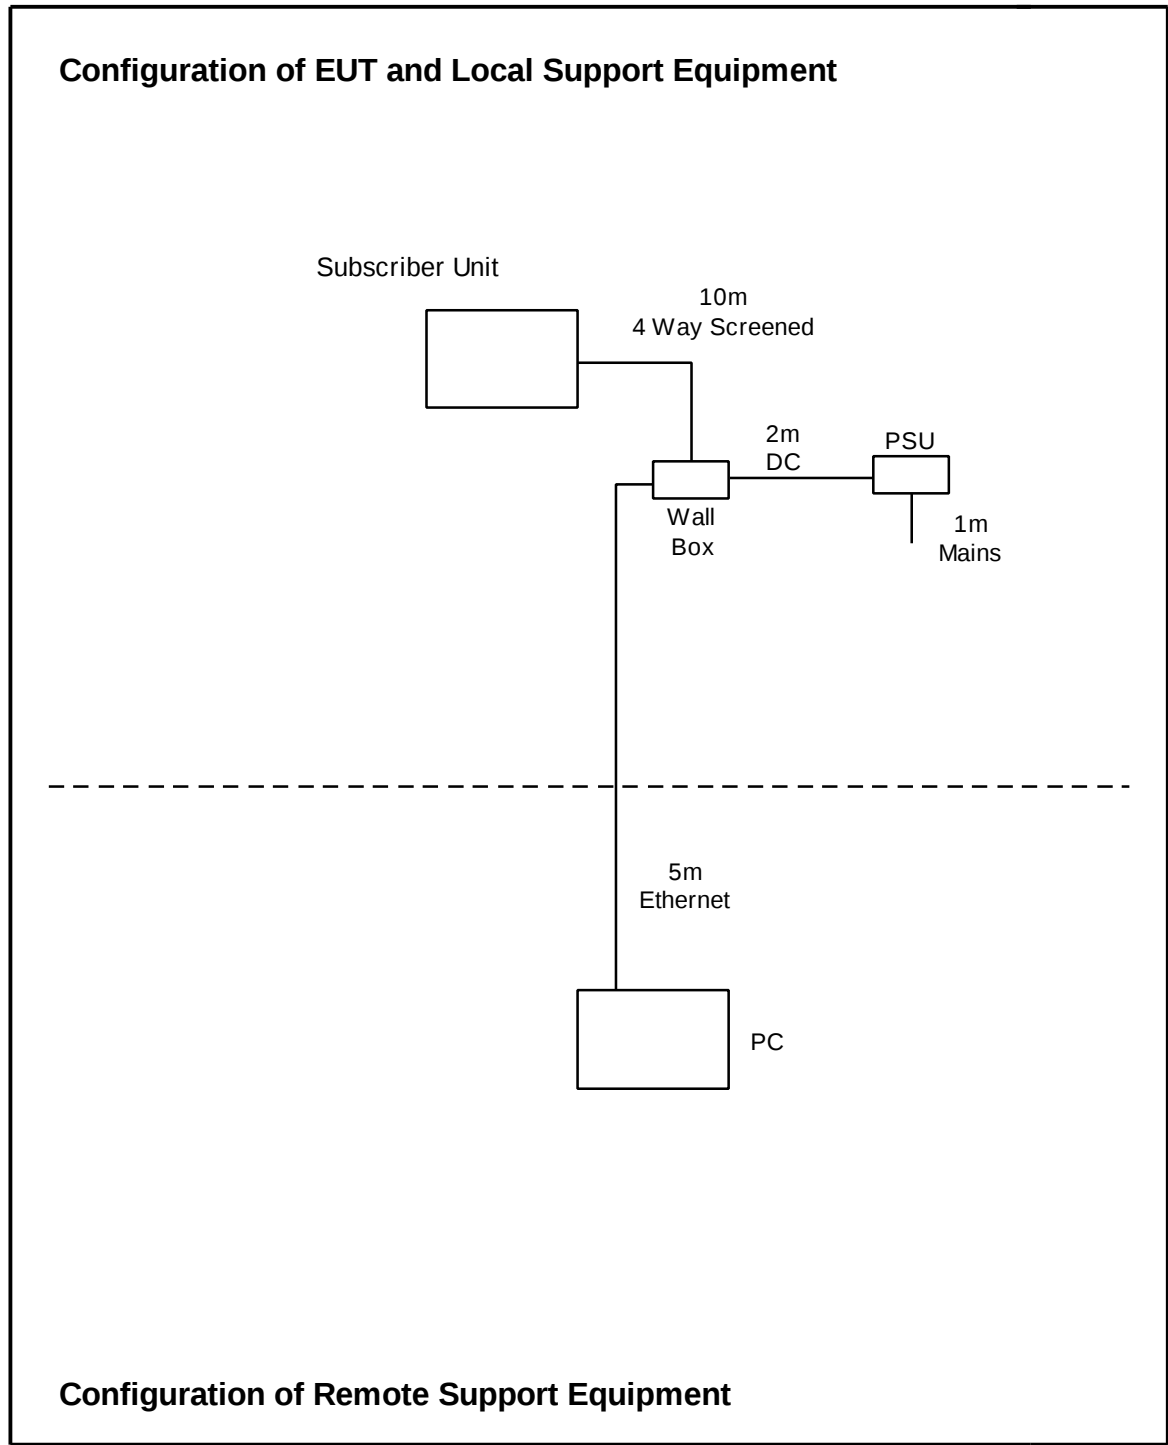

Test Of: Adaptive Broadband Ltd
AB-ACCESS Subscriber Unit (SU)
To: F.C.C. Part 15 Subpart E: 1998

DRG\38658ETF03\002

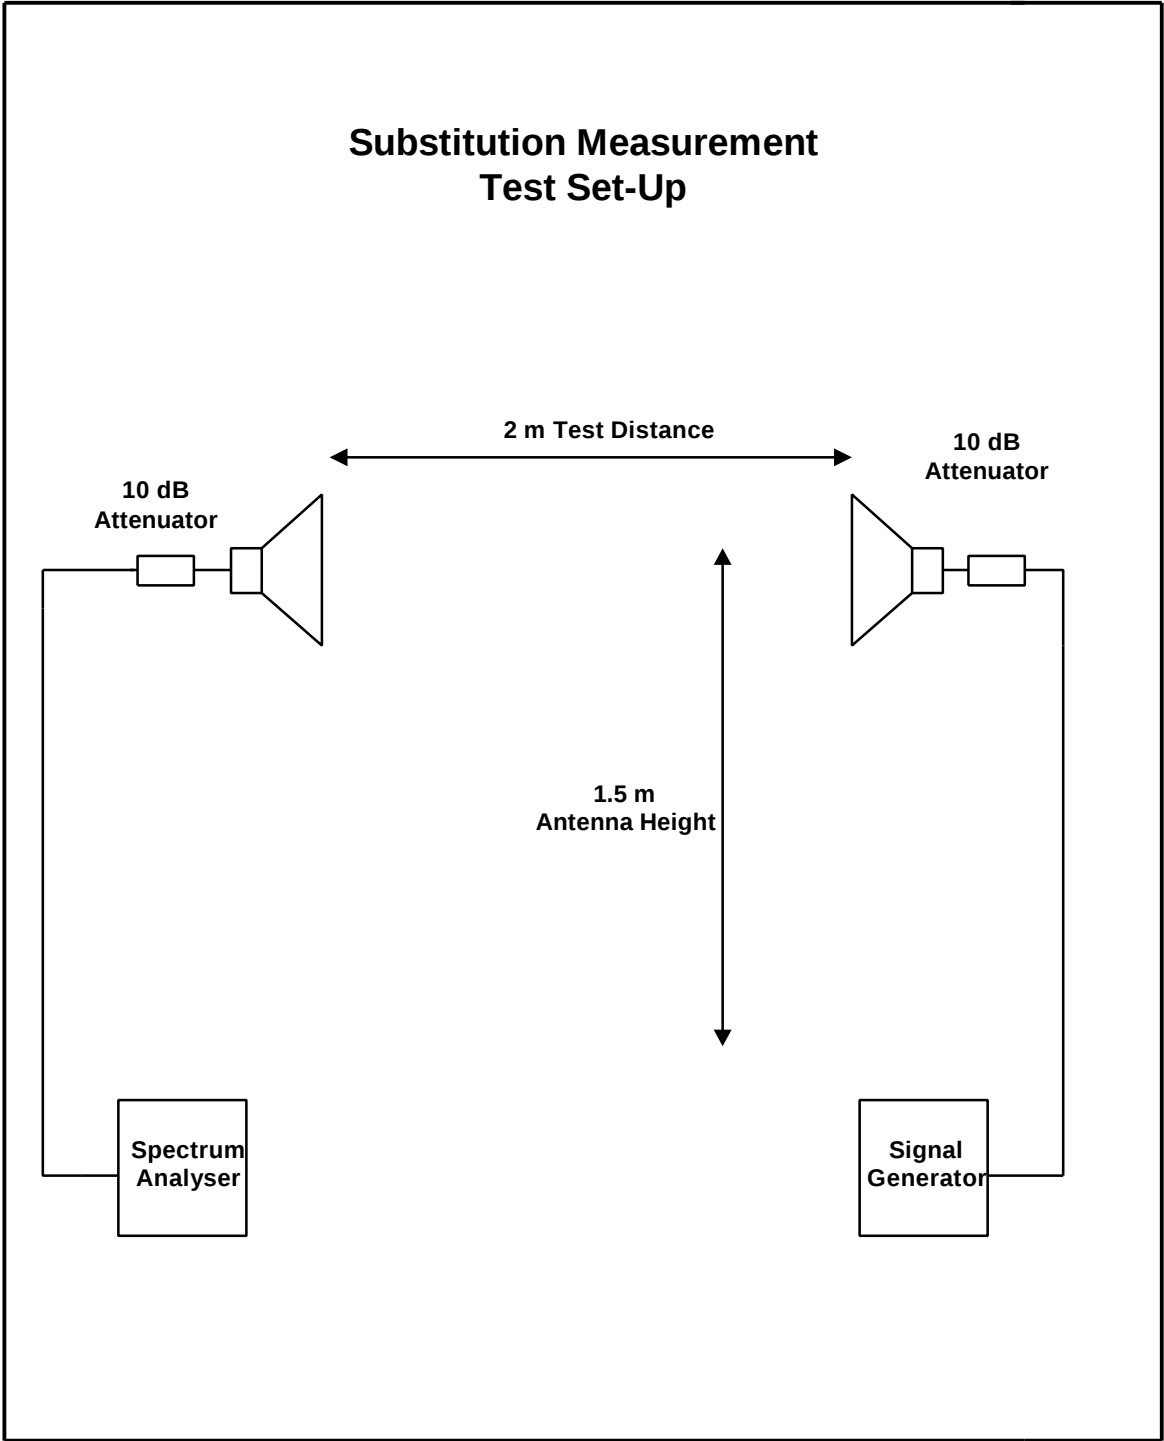

Test Of: Adaptive Broadband Ltd
 AB-ACCESS Subscriber Unit (SU)
 To: F.C.C. Part 15 Subpart E: 1998

Appendix 4. Graphical Test Results

This appendix contains the following graphs:

Graph Reference Number	Title
GPH\38658ETF03\001	Scan of Radiated Electric Field: Transmit Mode: 30 to 1000 MHz 5.15 to 5.25 GHz Band. Bottom Channel. (Channel 0)
GPH\38658ETF03\002	Scan of Radiated Electric Field: Transmit Mode: 30 to 1000 MHz 5.15 to 5.25 GHz Band. Top Channel. (Channel 4)
GPH\38658ETF03\003	Scan of Radiated Electric Field: Transmit Mode: 30 to 1000 MHz 5.25 to 5.35 GHz Band. Bottom Channel. (Channel 5)
GPH\38658ETF03\004	Scan of Radiated Electric Field: Transmit Mode: 30 to 1000 MHz 5.25 to 5.35 GHz Band. Top Channel. (Channel 9)
GPH\38658ETF03\005	Scan of Radiated Electric Field: Transmit Mode: 30 to 1000 MHz 5.725 to 5.825 GHz Band. Bottom Channel. (Channel 10)
GPH\38658ETF03\006	Scan of Radiated Electric Field: Transmit Mode: 30 to 1000 MHz 5.725 to 5.825 GHz Band. Top Channel. (Channel 14)
GPH\38658ETF03\007	Scan of Radiated Electric Field: Receive Mode: 30 to 1000 MHz 5.15 to 5.25 GHz Band. Bottom Channel. (Channel 0)
GPH\38658ETF03\008	Scan of Radiated Electric Field: Receive Mode: 30 to 1000 MHz 5.15 to 5.25 GHz Band. Top Channel. (Channel 4)
GPH\38658ETF03\009	Scan of Radiated Electric Field: Receive Mode: 30 to 1000 MHz 5.25 to 5.35 GHz Band. Bottom Channel. (Channel 5)
GPH\38658ETF03\010	Scan of Radiated Electric Field: Receive Mode: 30 to 1000 MHz 5.25 to 5.35 GHz Band. Top Channel. (Channel 9)
GPH\38658ETF03\011	Scan of Radiated Electric Field: Receive Mode: 30 to 1000 MHz 5.725 to 5.825 GHz Band. Bottom Channel. (Channel 10)
GPH\38658ETF03\012	Scan of Radiated Electric Field: Receive Mode: 30 to 1000 MHz 5.725 to 5.825 GHz Band. Top Channel. (Channel 14)
GPH\38658ETF03\013	Scan of Conducted Emissions: Receive Mode: 450 kHz to 30 MHz 5.15 to 5.25 GHz Band. Bottom Channel. (Channel 0). Live Line.
GPH\38658ETF03\014	Scan of Conducted Emissions: Receive Mode: 450 kHz to 30 MHz 5.15 to 5.25 GHz Band. Top Channel. (Channel 4). Live Line.
GPH\38658ETF03\015	Scan of Conducted Emissions: Receive Mode: 450 kHz to 30 MHz 5.25 to 5.35 GHz Band. Bottom Channel. (Channel 5). Live Line.
GPH\38658ETF03\016	Scan of Conducted Emissions: Receive Mode: 450 kHz to 30 MHz 5.25 to 5.35 GHz Band. Top Channel. (Channel 9). Live Line.
GPH\38658ETF03\017	Scan of Conducted Emissions: Receive Mode: 450 kHz to 30 MHz 5.725 to 5.825 GHz Band. Bottom Channel. (Channel 10). Live Line.
GPH\38658ETF03\018	Scan of Conducted Emissions: Receive Mode: 450 kHz to 30 MHz 5.725 to 5.825 GHz Band. Top Channel. (Channel 14). Live Line.

Test Of: Adaptive Broadband Ltd
 AB-ACCESS Subscriber Unit (SU)
 To: F.C.C. Part 15 Subpart E: 1998

Graphical Test Results (continued)

Graph Reference Number	Title
GPH\38658ETF03\019	Scan of Conducted Emissions: Transmit Mode: 450 kHz to 30 MHz 5.15 to 5.25 GHz Band. Bottom Channel. (Channel 0). Live Line.
GPH\38658ETF03\020	Scan of Conducted Emissions: Transmit Mode: 450 kHz to 30 MHz 5.15 to 5.25 GHz Band. Top Channel. (Channel 4). Live Line.
GPH\38658ETF03\021	Scan of Conducted Emissions: Transmit Mode: 450 kHz to 30 MHz 5.25 to 5.35 GHz Band. Bottom Channel. (Channel 5). Live Line.
GPH\38658ETF03\022	Scan of Conducted Emissions: Transmit Mode: 450 kHz to 30 MHz 5.25 to 5.35 GHz Band. Top Channel. (Channel 9). Live Line.
GPH\38658ETF03\023	Scan of Conducted Emissions: Transmit Mode: 450 kHz to 30 MHz 5.725 to 5.825 GHz Band. Bottom Channel. (Channel 10). Live Line.
GPH\38658ETF03\024	Scan of Conducted Emissions: Transmit Mode: 450 kHz to 30 MHz 5.725 to 5.825 GHz Band. Top Channel. (Channel 14). Live Line.
GPH\38658ETF03\025	Scan of Conducted Emissions: Receive Mode: 450 kHz to 30 MHz 5.15 to 5.25 GHz Band. Bottom Channel. (Channel 0). Neutral Line.
GPH\38658ETF03\026	Scan of Conducted Emissions: Receive Mode: 450 kHz to 30 MHz 5.15 to 5.25 GHz Band. Top Channel. (Channel 4). Neutral Line.
GPH\38658ETF03\027	Scan of Radiated Electric Field: Receive Mode: 1000 to 2000 MHz 5.15 to 5.25 GHz Band. Bottom Channel. (Channel 0)
GPH\38658ETF03\028	Scan of Radiated Electric Field: Receive Mode: 1000 to 2000 MHz 5.15 to 5.25 GHz Band. Top Channel. (Channel 4)
GPH\38658ETF03\029	Scan of Radiated Electric Field: Receive Mode: 1000 to 2000 MHz 5.25 to 5.35 GHz Band. Bottom Channel. (Channel 5)
GPH\38658ETF03\030	Scan of Radiated Electric Field: Receive Mode: 1000 to 2000 MHz 5.25 to 5.35 GHz Band. Top Channel. (Channel 9)
GPH\38658ETF03\031	Scan of Radiated Electric Field: Receive Mode: 1000 to 2000 MHz 5.725 to 5.85 GHz Band. Bottom Channel. (Channel 10)
GPH\38658ETF03\032	Scan of Radiated Electric Field: Receive Mode: 1000 to 2000 MHz 5.725 to 5.825 GHz Band. Top Channel. (Channel 14)
GPH\38658ETF03\033	Scan of Radiated Electric Field: Receive Mode: 2000 to 4000 MHz 5.15 to 5.25 GHz Band. Bottom Channel. (Channel 0)
GPH\38658ETF03\034	Scan of Radiated Electric Field: Receive Mode: 2000 to 4000 MHz 5.15 to 5.25 GHz Band. Top Channel. (Channel 4)
GPH\38658ETF03\035	Scan of Radiated Electric Field: Receive Mode: 2000 to 4000 MHz 5.25 to 5.35 GHz Band. Bottom Channel. (Channel 5)
GPH\38658ETF03\036	Scan of Radiated Electric Field: Receive Mode: 2000 to 4000 MHz 5.25 to 5.35 GHz Band. Top Channel. (Channel 9)
GPH\38658ETF03\037	Scan of Radiated Electric Field: Receive Mode: 2000 to 4000 MHz 5.725 to 5.85 GHz Band. Bottom Channel. (Channel 10)

Test Of: Adaptive Broadband Ltd
 AB-ACCESS Subscriber Unit (SU)
 To: F.C.C. Part 15 Subpart E: 1998

Graphical Test Results (continued)

Graph Reference Number	Title
GPH\38658ETF03\038	Scan of Radiated Electric Field: Receive Mode: 2000 to 4000 MHz 5.725 to 5.825 GHz Band. Top Channel. (Channel 14)
GPH\38658ETF03\039	Scan of Radiated Electric Field: Receive Mode: 4000 to 5000 MHz 5.15 to 5.25 GHz Band. Bottom Channel. (Channel 0)
GPH\38658ETF03\040	Scan of Radiated Electric Field: Receive Mode: 4000 to 5000 MHz 5.15 to 5.25 GHz Band. Top Channel. (Channel 4)
GPH\38658ETF03\041	Scan of Radiated Electric Field: Receive Mode: 4000 to 5000 MHz 5.25 to 5.35 GHz Band. Bottom Channel. (Channel 5)
GPH\38658ETF03\042	Scan of Radiated Electric Field: Receive Mode: 4000 to 5000 MHz 5.25 to 5.35 GHz Band. Top Channel. (Channel 9)
GPH\38658ETF03\043	Scan of Radiated Electric Field: Receive Mode: 4000 to 5000 MHz 5.725 to 5.85 GHz Band. Bottom Channel. (Channel 10)
GPH\38658ETF03\044	Scan of Radiated Electric Field: Receive Mode: 4000 to 5000 MHz 5.725 to 5.825 GHz Band. Top Channel. (Channel 14)
GPH\38658ETF03\045	Scan of Radiated Electric Field: Receive Mode: 5000 to 6000 MHz 5.15 to 5.25 GHz Band. Bottom Channel. (Channel 0)
GPH\38658ETF03\046	Scan of Radiated Electric Field: Receive Mode: 5000 to 6000 MHz 5.15 to 5.25 GHz Band. Top Channel. (Channel 4)
GPH\38658ETF03\047	Scan of Radiated Electric Field: Receive Mode: 5000 to 6000 MHz 5.25 to 5.35 GHz Band. Bottom Channel. (Channel 5)
GPH\38658ETF03\048	Scan of Radiated Electric Field: Receive Mode: 5000 to 6000 MHz 5.25 to 5.35 GHz Band. Top Channel. (Channel 9)
GPH\38658ETF03\049	Scan of Radiated Electric Field: Receive Mode: 5000 to 6000 MHz 5.725 to 5.85 GHz Band. Bottom Channel. (Channel 10)
GPH\38658ETF03\050	Scan of Radiated Electric Field: Receive Mode: 5000 to 6000 MHz 5.725 to 5.825 GHz Band. Top Channel. (Channel 14)
GPH\38658ETF03\051	Scan of Radiated Electric Field: Receive Mode: 6000 to 8200 MHz 5.15 to 5.25 GHz Band. Bottom Channel. (Channel 0)
GPH\38658ETF03\052	Scan of Radiated Electric Field: Receive Mode: 6000 to 8200 MHz 5.15 to 5.25 GHz Band. Top Channel. (Channel 4)
GPH\38658ETF03\053	Scan of Radiated Electric Field: Receive Mode: 6000 to 8200 MHz 5.25 to 5.35 GHz Band. Bottom Channel. (Channel 5)
GPH\38658ETF03\054	Scan of Radiated Electric Field: Receive Mode: 6000 to 8200 MHz 5.25 to 5.35 GHz Band. Top Channel. (Channel 9)
GPH\38658ETF03\055	Scan of Radiated Electric Field: Receive Mode: 6000 to 8200 MHz 5.725 to 5.85 GHz Band. Bottom Channel. (Channel 10)
GPH\38658ETF03\056	Scan of Radiated Electric Field: Receive Mode: 6000 to 8200 MHz 5.725 to 5.825 GHz Band. Top Channel. (Channel 14)

Test Of: Adaptive Broadband Ltd
 AB-ACCESS Subscriber Unit (SU)
 To: F.C.C. Part 15 Subpart E: 1998

Graphical Test Results (continued)

Graph Reference Number	Title
GPH\38658ETF03\057	Scan of Radiated Electric Field: Receive Mode: 8200 to 12500 MHz 5.15 to 5.25 GHz Band. Bottom Channel. (Channel 0)
GPH\38658ETF03\058	Scan of Radiated Electric Field: Receive Mode: 8200 to 12500 MHz 5.15 to 5.25 GHz Band. Top Channel. (Channel 4)
GPH\38658ETF03\059	Scan of Radiated Electric Field: Receive Mode: 8200 to 12500 MHz 5.25 to 5.35 GHz Band. Bottom Channel. (Channel 5)
GPH\38658ETF03\060	Scan of Radiated Electric Field: Receive Mode: 8200 to 12500 MHz 5.25 to 5.35 GHz Band. Top Channel. (Channel 9)
GPH\38658ETF03\061	Scan of Radiated Electric Field: Receive Mode: 8200 to 12500 MHz 5.725 to 5.85 GHz Band. Bottom Channel. (Channel 10)
GPH\38658ETF03\062	Scan of Radiated Electric Field: Receive Mode: 8200 to 12500 MHz 5.725 to 5.825 GHz Band. Top Channel. (Channel 14)
GPH\38658ETF03\063	Scan of Radiated Electric Field: Receive Mode: 12500 to 18000 MHz 5.15 to 5.25 GHz Band. Bottom Channel. (Channel 0)
GPH\38658ETF03\064	Scan of Radiated Electric Field: Receive Mode: 12500 to 18000 MHz 5.15 to 5.25 GHz Band. Top Channel. (Channel 4)
GPH\38658ETF03\065	Scan of Radiated Electric Field: Receive Mode: 12500 to 18000 MHz 5.25 to 5.35 GHz Band. Bottom Channel. (Channel 5)
GPH\38658ETF03\066	Scan of Radiated Electric Field: Receive Mode: 12500 to 18000 MHz 5.25 to 5.35 GHz Band. Top Channel. (Channel 9)
GPH\38658ETF03\067	Scan of Radiated Electric Field: Receive Mode: 12500 to 18000 MHz 5.725 to 5.85 GHz Band. Bottom Channel. (Channel 10)
GPH\38658ETF03\068	Scan of Radiated Electric Field: Receive Mode: 12500 to 18000 MHz 5.725 to 5.825 GHz Band. Top Channel. (Channel 14)
GPH\38658ETF03\069	Scan of Radiated Electric Field: Receive Mode: 18000 to 26000 MHz 5.15 to 5.25 GHz Band. Bottom Channel. (Channel 0)
GPH\38658ETF03\070	Scan of Radiated Electric Field: Receive Mode: 18000 to 26000 MHz 5.15 to 5.25 GHz Band. Top Channel. (Channel 4)
GPH\38658ETF03\071	Scan of Radiated Electric Field: Receive Mode: 18000 to 26000 MHz 5.25 to 5.35 GHz Band. Bottom Channel. (Channel 5)
GPH\38658ETF03\072	Scan of Radiated Electric Field: Receive Mode: 18000 to 26000 MHz 5.25 to 5.35 GHz Band. Top Channel. (Channel 9)
GPH\38658ETF03\073	Scan of Radiated Electric Field: Receive Mode: 18000 to 26000 MHz 5.725 to 5.85 GHz Band. Bottom Channel. (Channel 10)
GPH\38658ETF03\074	Scan of Radiated Electric Field: Receive Mode: 18000 to 26000 MHz 5.725 to 5.825 GHz Band. Top Channel. (Channel 14)
GPH\38658ETF03\075	Transmitter Power Level: EIRP. Tx Horizontal. 5.15 to 5.25 GHz Band. Bottom Channel. (Channel 0)

Test Of: Adaptive Broadband Ltd
 AB-ACCESS Subscriber Unit (SU)
 To: F.C.C. Part 15 Subpart E: 1998

Graphical Test Results (continued)

Graph Reference Number	Title
GPH\38658ETF03\076	Transmitter Power Level: EIRP. Tx Vertical. 5.15 to 5.25 GHz Band. Bottom Channel. (Channel 0)
GPH\38658ETF03\077	Transmitter Power Level: EIRP. Tx Vertical. 5.15 to 5.25 GHz Band. Top Channel. (Channel 4)
GPH\38658ETF03\078	Transmitter Power Level: EIRP. Tx Horizontal. 5.15 to 5.25 GHz Band. Top Channel. (Channel 4)
GPH\38658ETF03\079	Transmitter Power Level: EIRP. Tx Horizontal. 5.25 to 5.35 GHz Band. Bottom Channel. (Channel 5)
GPH\38658ETF03\080	Transmitter Power Level: EIRP. Tx Vertical. 5.25 to 5.35 GHz Band. Bottom Channel. (Channel 5)
GPH\38658ETF03\081	Transmitter Power Level: EIRP. Tx Vertical. 5.25 to 5.35 GHz Band. Top Channel. (Channel 9)
GPH\38658ETF03\082	Transmitter Power Level: EIRP. Tx Horizontal. 5.25 to 5.35 GHz Band. Top Channel. (Channel 9)
GPH\38658ETF03\083	Transmitter Power Level: EIRP. Tx Horizontal. 5.725 to 5.825 GHz Band. Bottom Channel. (Channel 10)
GPH\38658ETF03\084	Transmitter Power Level: EIRP. Tx Vertical. 5.725 to 5.825 GHz Band. Bottom Channel. (Channel 10)
GPH\38658ETF03\085	Transmitter Power Level: EIRP. Tx Vertical. 5.725 to 5.825 GHz Band. Top Channel. (Channel 14)
GPH\38658ETF03\086	Transmitter Power Level: EIRP. Tx Horizontal. 5.725 to 5.825 GHz Band. Top Channel. (Channel 14)
GPH\38658ETF03\087	Spurious Radiated Emissions: EIRP. Tx Horizontal. 5.15 to 5.25 GHz Band. Bottom Channel. (Channel 0). Tx Lower Band Edge. 5.0 to 5.25 GHz.
GPH\38658ETF03\088	Spurious Radiated Emissions: EIRP. Tx Vertical. 5.15 to 5.25 GHz Band. Bottom Channel. (Channel 0). Tx Lower Band Edge. 5.0 to 5.25 GHz.
GPH\38658ETF03\089	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.15 to 5.25 GHz Band. Bottom Channel. (Channel 0). Tx Upper Band Edge. 5.25 to 6.0 GHz.
GPH\38658ETF03\090	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.15 to 5.25 GHz Band. Bottom Channel. (Channel 0). 4.0 to 5.0 GHz.
GPH\38658ETF03\091	Spurious Radiated Emissions: EIRP. Tx Vertical. 5.15 to 5.25 GHz Band. Top Channel. (Channel 4). Tx Upper Band Edge. 5.1838 to 5.3088 GHz.
GPH\38658ETF03\092	Spurious Radiated Emissions: EIRP. Tx Horizontal. 5.15 to 5.25 GHz Band. Top Channel. (Channel 4). Tx Upper Band Edge. 5.1838 to 5.3088 GHz.

Test Of: Adaptive Broadband Ltd
 AB-ACCESS Subscriber Unit (SU)
 To: F.C.C. Part 15 Subpart E: 1998

Graphical Test Results (continued)

Graph Reference Number	Title
GPH\38658ETF03\093	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.15 to 5.25 GHz Band. Top Channel. (Channel 4). Tx Lower Band Edge. 5.0 to 5.2 GHz.
GPH\38658ETF03\094	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.15 to 5.25 GHz Band. Top Channel. (Channel 4). 5.3 to 6.0 GHz.
GPH\38658ETF03\095	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.15 to 5.25 GHz Band. Top Channel. (Channel 4). 4.0 to 5.0 GHz.
GPH\38658ETF03\096	Spurious Radiated Emissions: EIRP. Tx Vertical. 5.25 to 5.35 GHz Band. Bottom Channel. (Channel 5). Tx Lower Band Edge. 5.1783 to 5.3033 GHz.
GPH\38658ETF03\097	Spurious Radiated Emissions: EIRP. Tx Horizontal. 5.25 to 5.35 GHz Band. Bottom Channel. (Channel 5). Tx Lower Band Edge. 5.1783 to 5.3033 GHz.
GPH\38658ETF03\098	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.25 to 5.35 GHz Band. Bottom Channel. (Channel 5). 5.0 to 5.2 GHz.
GPH\38658ETF03\099	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.25 to 5.35 GHz Band. Bottom Channel. (Channel 5). Upper Band Edge. 5.3 to 6.0 GHz.
GPH\38658ETF03\100	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.25 to 5.35 GHz Band. Bottom Channel. (Channel 5). 4.0 to 5.0 GHz.
GPH\38658ETF03\101	Spurious Radiated Emissions: EIRP. Tx Vertical. 5.25 to 5.35 GHz Band. Top Channel. (Channel 9). Upper Band Edge. 5.31124 to 5.37374 GHz.
GPH\38658ETF03\102	Spurious Radiated Emissions: EIRP. Tx Horizontal. 5.25 to 5.35 GHz Band. Top Channel. (Channel 9). Upper Band Edge. 5.31124 to 5.37374 GHz.
GPH\38658ETF03\103	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.25 to 5.35 GHz Band. Top Channel. (Channel 9). 5.36 to 6.0 GHz.
GPH\38658ETF03\104	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.25 to 5.35 GHz Band. Top Channel. (Channel 9). Lower Band Edge. 5.0 to 5.32 GHz.
GPH\38658ETF03\105	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.25 to 5.35 GHz Band. Top Channel. (Channel 9). 4.0 to 5.0 GHz.

Test Of: Adaptive Broadband Ltd
 AB-ACCESS Subscriber Unit (SU)
 To: F.C.C. Part 15 Subpart E: 1998

Graphical Test Results (continued)

Graph Reference Number	Title
GPH\38658ETF03\106	Spurious Radiated Emissions: EIRP. Tx Vertical. 5.725 to 5.825 GHz Band. Bottom Channel. (Channel 10). Bottom Band Edge. 5.70486 to 5.76736 GHz.
GPH\38658ETF03\107	Spurious Radiated Emissions: EIRP. Tx Horizontal. 5.725 to 5.825 GHz Band. Bottom Channel. (Channel 10). Bottom Band Edge. 5.70486 to 5.76736 GHz.
GPH\38658ETF03\108	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.725 to 5.825 GHz Band. Bottom Channel. (Channel 10). 5.0 to 5.715 GHz.
GPH\38658ETF03\109	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.725 to 5.825 GHz Band. Bottom Channel. (Channel 10). Upper Band Edge. 5.76 to 6.0 GHz.
GPH\38658ETF03\110	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.725 to 5.825 GHz Band. Bottom Channel. (Channel 10). 4.0 to 5.0 GHz.
GPH\38658ETF03\111	Spurious Radiated Emissions: EIRP. Tx Horizontal. 5.725 to 5.825 GHz Band. Top Channel. (Channel 14). Upper Band Edge. 5.77909 to 5.84159 GHz.
GPH\38658ETF03\112	Spurious Radiated Emissions: EIRP. Tx Vertical. 5.725 to 5.825 GHz Band. Top Channel. (Channel 14). Upper Band Edge. 5.77909 to 5.84159 GHz.
GPH\38658ETF03\113	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.725 to 5.825 GHz Band. Top Channel. (Channel 14). 5.835 to 6.0 GHz.
GPH\38658ETF03\114	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.725 to 5.825 GHz Band. Top Channel. (Channel 14). Lower Band Edge. 5.0 to 5.78 GHz.
GPH\38658ETF03\115	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.725 to 5.825 GHz Band. Top Channel. (Channel 14). 4.0 to 5.0 GHz.
GPH\38658ETF03\116	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.15 to 5.25 GHz Band. Bottom Channel. (Channel 0). 6.0 to 8.2 GHz.
GPH\38658ETF03\117	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.15 to 5.25 GHz Band. Top Channel. (Channel 4). 6.0 to 8.2 GHz.
GPH\38658ETF03\118	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.25 to 5.35 GHz Band. Bottom Channel. (Channel 5). 6.0 to 8.2 GHz.

Test Of: Adaptive Broadband Ltd
 AB-ACCESS Subscriber Unit (SU)
 To: F.C.C. Part 15 Subpart E: 1998

Graphical Test Results (continued)

Graph Reference Number	Title
GPH\38658ETF03\119	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.25 to 5.35 GHz Band. Top Channel. (Channel 9). 6.0 to 8.2 GHz.
GPH\38658ETF03\120	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.725 to 5.825 GHz Band. Bottom Channel. (Channel 10). 6.0 to 8.2 GHz.
GPH\38658ETF03\121	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.725 to 5.825 GHz Band. Top Channel. (Channel 14). 6.0 to 8.2 GHz.
GPH\38658ETF03\122	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.15 to 5.25 GHz Band. Bottom Channel. (Channel 0). 8.2 to 12.5 GHz.
GPH\38658ETF03\123	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.15 to 5.25 GHz Band. Top Channel. (Channel 4). 8.2 to 12.5 GHz.
GPH\38658ETF03\124	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.25 to 5.35 GHz Band. Bottom Channel. (Channel 5). 8.2 to 12.5 GHz.
GPH\38658ETF03\125	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.25 to 5.35 GHz Band. Top Channel. (Channel 9). 8.2 to 12.5 GHz.
GPH\38658ETF03\126	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.725 to 5.825 GHz Band. Bottom Channel. (Channel 10). 8.2 to 12.5 GHz.
GPH\38658ETF03\127	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.725 to 5.825 GHz Band. Top Channel. (Channel 14). 8.2 to 12.5 GHz.
GPH\38658ETF03\128	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.15 to 5.25 GHz Band. Bottom Channel. (Channel 0). 12.5 to 18.0 GHz.
GPH\38658ETF03\129	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.15 to 5.25 GHz Band. Top Channel. (Channel 4). 12.5 to 18.0 GHz.
GPH\38658ETF03\130	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.25 to 5.35 GHz Band. Bottom Channel. (Channel 5). 12.5 to 18.0 GHz.
GPH\38658ETF03\131	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.25 to 5.35 GHz Band. Top Channel. (Channel 9). 12.5 to 18.0 GHz.

Test Of: Adaptive Broadband Ltd
 AB-ACCESS Subscriber Unit (SU)
 To: F.C.C. Part 15 Subpart E: 1998

Graphical Test Results (continued)

Graph Reference Number	Title
GPH\38658ETF03\132	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.725 to 5.825 GHz Band. Bottom Channel. (Channel 10). 12.5 to 18.0 GHz.
GPH\38658ETF03\133	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.725 to 5.825 GHz Band. Top Channel. (Channel 14). 12.5 to 18.0 GHz.
GPH\38658ETF03\134	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.15 to 5.25 GHz Band. Bottom Channel. (Channel 0). 18.0 to 26.0 GHz.
GPH\38658ETF03\135	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.15 to 5.25 GHz Band. Top Channel. (Channel 4). 18.0 to 26.0 GHz.
GPH\38658ETF03\136	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.25 to 5.35 GHz Band. Bottom Channel. (Channel 5). 18.0 to 26.0 GHz.
GPH\38658ETF03\137	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.25 to 5.35 GHz Band. Top Channel. (Channel 9). 18.0 to 26.0 GHz.
GPH\38658ETF03\138	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.725 to 5.825 GHz Band. Bottom Channel. (Channel 10). 18.0 to 26.0 GHz.
GPH\38658ETF03\139	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.725 to 5.825 GHz Band. Top Channel. (Channel 14). 18.0 to 26.0 GHz.
GPH\38658ETF03\140	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.15 to 5.25 GHz Band. Bottom Channel. (Channel 0). 26.0 to 40.0 GHz.
GPH\38658ETF03\141	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.15 to 5.25 GHz Band. Top Channel. (Channel 4). 26.0 to 40.0 GHz.
GPH\38658ETF03\142	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.25 to 5.35 GHz Band. Bottom Channel. (Channel 5). 26.0 to 40.0 GHz.
GPH\38658ETF03\143	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.25 to 5.35 GHz Band. Top Channel. (Channel 9). 26.0 to 40.0 GHz.
GPH\38658ETF03\144	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.725 to 5.825 GHz Band. Bottom Channel. (Channel 10). 26.0 to 40.0 GHz.

Test Of: Adaptive Broadband Ltd
 AB-ACCESS Subscriber Unit (SU)
 To: F.C.C. Part 15 Subpart E: 1998

Graphical Test Results (continued)

Graph Reference Number	Title
GPH\38658ETF03\145	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.725 to 5.825 GHz Band. Top Channel. (Channel 14). 26.0 to 40.0 GHz.
GPH\38658ETF03\146	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.15 to 5.25 GHz Band. Bottom Channel. (Channel 0). 2.0 to 4.0 GHz.
GPH\38658ETF03\147	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.15 to 5.25 GHz Band. Top Channel. (Channel 4). 2.0 to 4.0 GHz.
GPH\38658ETF03\148	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.25 to 5.35 GHz Band. Bottom Channel. (Channel 5). 2.0 to 4.0 GHz.
GPH\38658ETF03\149	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.25 to 5.35 GHz Band. Top Channel. (Channel 9). 2.0 to 4.0 GHz.
GPH\38658ETF03\150	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.725 to 5.825 GHz Band. Bottom Channel. (Channel 10). 2.0 to 4.0 GHz.
GPH\38658ETF03\151	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.725 to 5.825 GHz Band. Top Channel. (Channel 14). 2.0 to 4.0 GHz.
GPH\38658ETF03\152	No Plot
GPH\38658ETF03\153	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.15 to 5.25 GHz Band. Bottom Channel. (Channel 0). 1.0 to 2.0 GHz.
GPH\38658ETF03\154	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.15 to 5.25 GHz Band. Top Channel. (Channel 4). 1.0 to 2.0 GHz.
GPH\38658ETF03\155	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.25 to 5.35 GHz Band. Bottom Channel. (Channel 5). 1.0 to 2.0 GHz.
GPH\38658ETF03\156	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.25 to 5.35 GHz Band. Top Channel. (Channel 9). 1.0 to 2.0 GHz.
GPH\38658ETF03\157	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.725 to 5.825 GHz Band. Bottom Channel. (Channel 10). 1.0 to 2.0 GHz.
GPH\38658ETF03\158	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.725 to 5.825 GHz Band. Top Channel. (Channel 14). 1.0 to 2.0 GHz.

Test Of: Adaptive Broadband Ltd
AB-ACCESS Subscriber Unit (SU)
To: F.C.C. Part 15 Subpart E: 1998

Graphical Test Results (continued)

Graph Reference Number	Title
GPH\38658ETF03\159	Scan of Conducted Emissions: Receive Mode: 450 kHz to 30 MHz 5.25 to 5.35 GHz Band. Bottom Channel. (Channel 5). Neutral Line.
GPH\38658ETF03\160	Scan of Conducted Emissions: Receive Mode: 450 kHz to 30 MHz 5.25 to 5.35 GHz Band. Top Channel. (Channel 9). Neutral Line.
GPH\38658ETF03\161	Scan of Conducted Emissions: Receive Mode: 450 kHz to 30 MHz 5.725 to 5.825 GHz Band. Bottom Channel. (Channel 10). Neutral Line.
GPH\38658ETF03\162	Scan of Conducted Emissions: Receive Mode: 450 kHz to 30 MHz 5.725 to 5.825 GHz Band. Top Channel. (Channel 14). Neutral Line.
GPH\38658ETF03\163	Scan of Conducted Emissions: Transmit Mode: 450 kHz to 30 MHz 5.15 to 5.25 GHz Band. Bottom Channel. (Channel 0). Neutral Line.
GPH\38658ETF03\164	Scan of Conducted Emissions: Transmit Mode: 450 kHz to 30 MHz 5.15 to 5.25 GHz Band. Top Channel. (Channel 4). Neutral Line.
GPH\38658ETF03\165	Scan of Conducted Emissions: Transmit Mode: 450 kHz to 30 MHz 5.25 to 5.35 GHz Band. Bottom Channel. (Channel 5). Neutral Line.
GPH\38658ETF03\166	Scan of Conducted Emissions: Transmit Mode: 450 kHz to 30 MHz 5.25 to 5.35 GHz Band. Top Channel. (Channel 9). Neutral Line.
GPH\38658ETF03\167	Scan of Conducted Emissions: Transmit Mode: 450 kHz to 30 MHz 5.725 to 5.85 GHz Band. Top Channel. (Channel 14). Neutral Line.
GPH\38658ETF03\168	Scan of Conducted Emissions: Transmit Mode: 450 kHz to 30 MHz 5.725 to 5.825 GHz Band. Bottom Channel. (Channel 10). Neutral Line.
GPH\38658ETF03\169	Frequency Stability. Supply Variation.
GPH\38658ETF03\170	Frequency Stability. Temperature Variation.

These pages are not included in the total number of pages for this report.

RADIO FREQUENCY INVESTIGATION LTD.

EMC Department

Test Of: Adaptive Broadband Ltd
To: AB-ACCESS Subscriber Unit (SU)
F.C.C. Part 15 Subpart E: 1998

TEST REPORT

S.No: RFI/EMCB1/RP38658A

Page 58 of 58

Issue Date: 13 December 2000

This page has been left intentionally blank.



Date 26.Mar.'99 Time 15:16:02

Ref.Lvl Marker

70.00 dB*

53.98 dB*

44.9 MHz

Res.BW

TG.Lvl

CF.Stp

120 kHz [imp]

Off

97.000 MHz

Vid.BW


AF.Att

Unit

100 kHz

0 dB

[dB μ V/m]

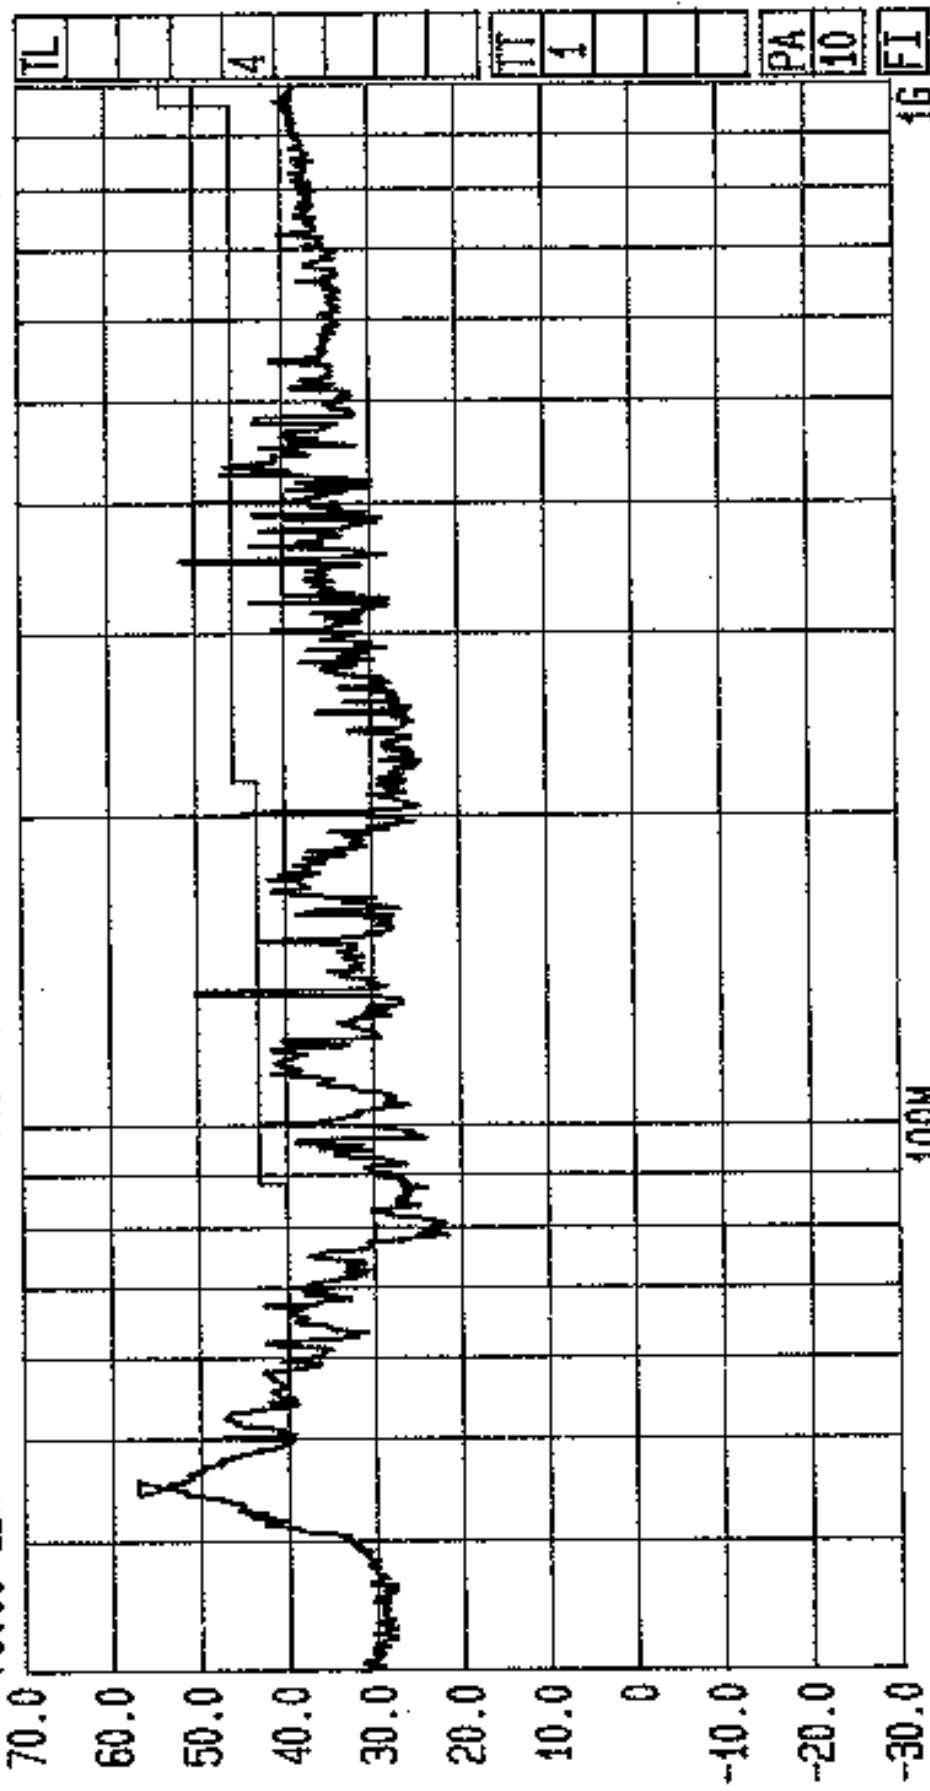

Start
30 MHz

Span
970 MHz

Center
173.2 MHz

Sweep
380 ms

Stop
1 GHz

Radiated. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit
Limit. FCC Part 15.407 (b (5) . 5.15-5.25 GHz Band. Bottom Channel1. GPH/38658/JD04/001



Date 26.Mar.'99 Time 15:34:36

Ref.Lvl 70.00 dBx

Marker 57.03 dBx

44.9 MHz

Res.Bw 16.Lvl

CF.Stp


120 kHz [imp]

97.000 MHz

RF.Att

0 dB

100 kHz

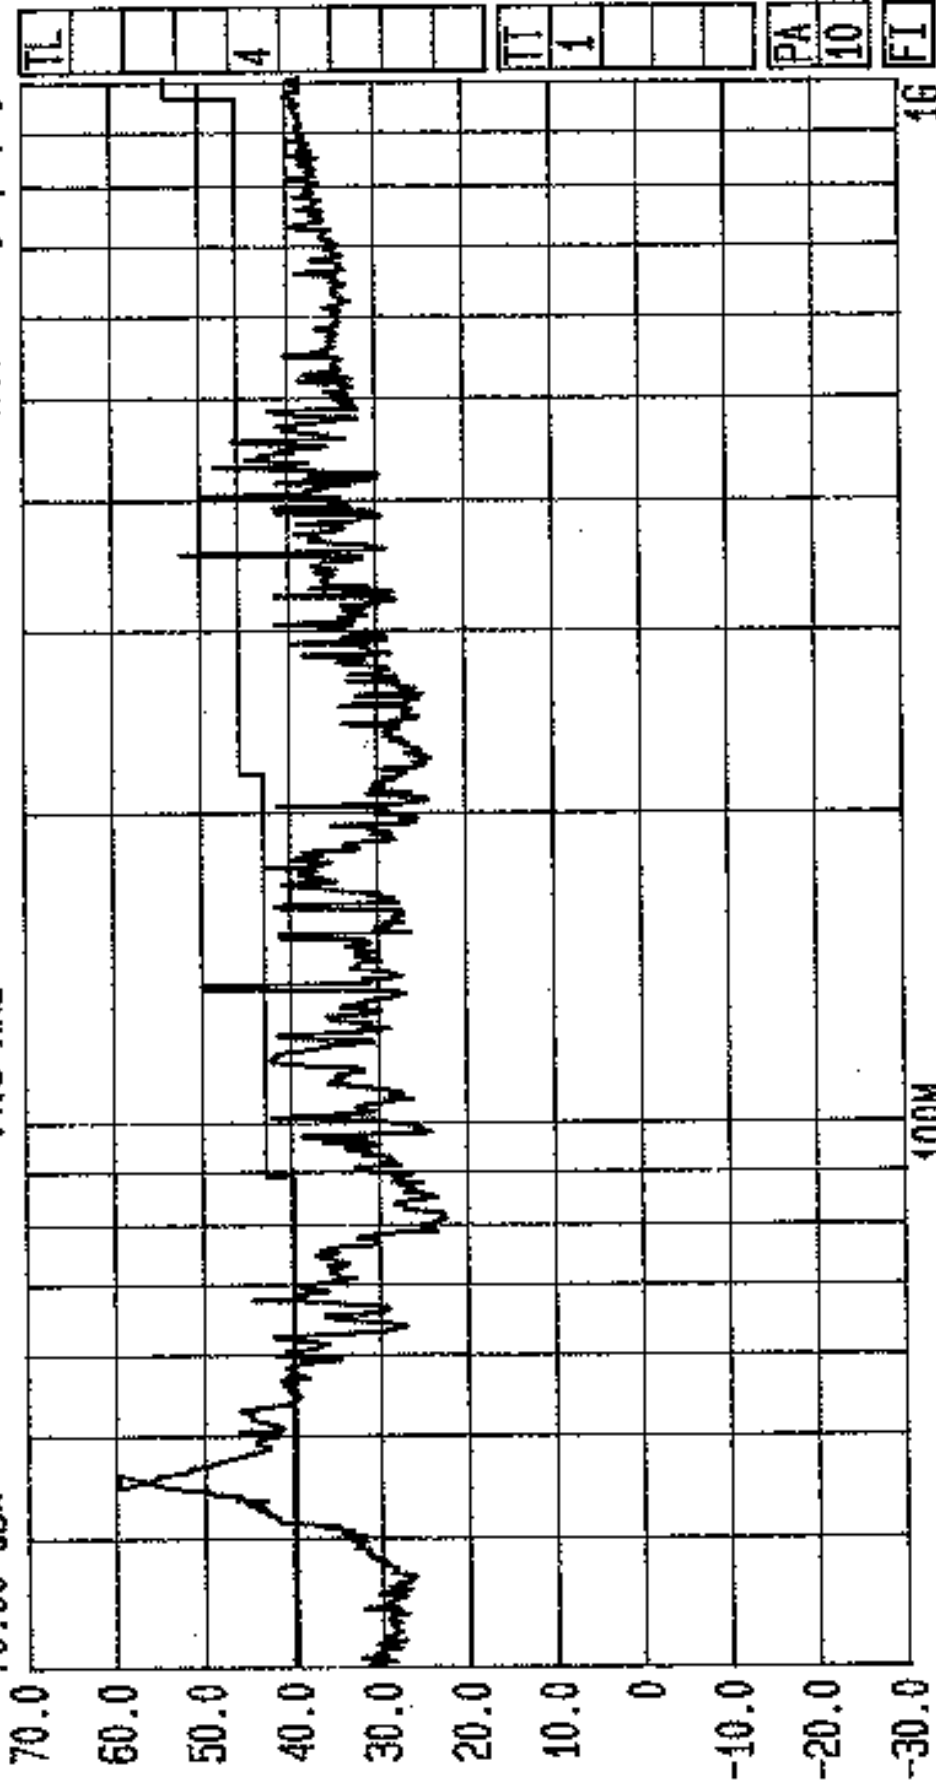

Start 30 MHz

Span 970 MHz

Center 173.2 MHz

Sweep 80 ms


Stop 1 GHz

Radiated. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit
Limit. FCC Part 15.407 (b (5) . 5.15-5.25 GHz Band. Top Channel. 6PH/38658/JD04/002



Date 26.Mar.'99 Time 15:45:57
Ref.Lvl 70.00 dB* Marker 58.63 dB*
CF.Stp 45.1 MHz

Res.Bw 120 kHz [imp] Vid.Bw 100 kHz
T6.Lvl Off
RF.Att 0 dB
Unit [dBuV/m]

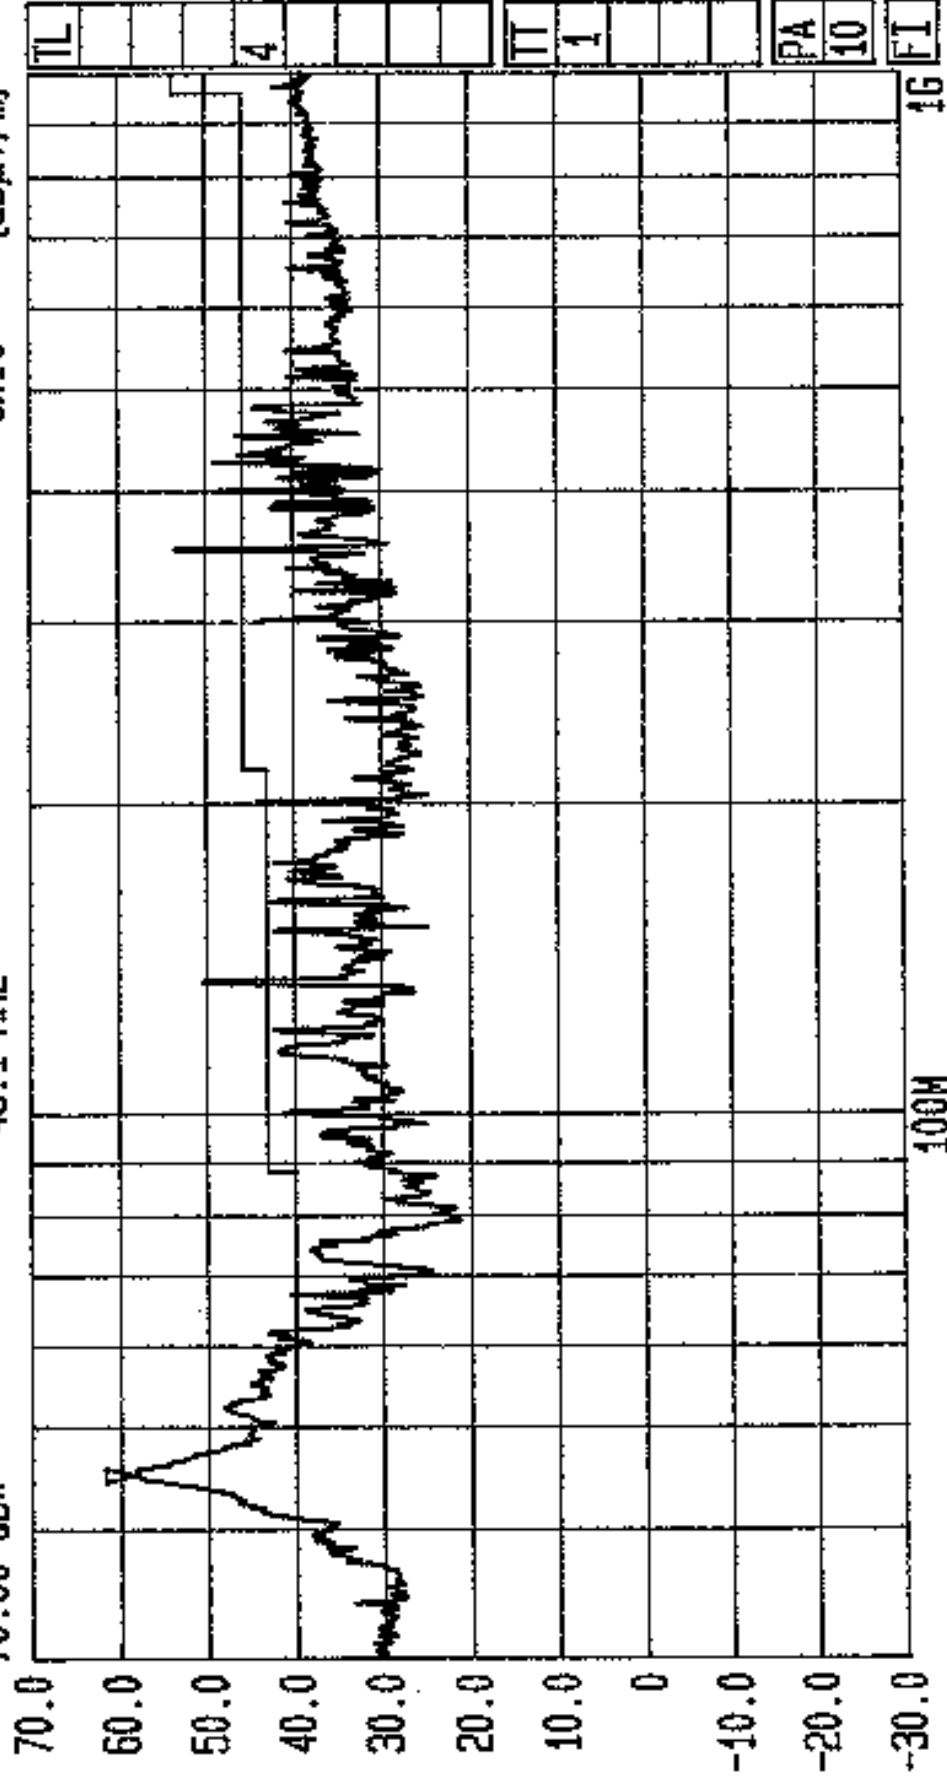


Start 30 MHz Span 970 MHz Center 173.2 MHz Sweep 380 ms Stop 1 GHz

Radiated. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit
Limit. FCC Part 15.407 (b (5) . 5.25-5.35 GHz Band. Bottom Channel1. 6PH/38658/JD04/003



Date 26.Mar.'99 Time 15:58:44
Ref.Lvl 70.00 dB*
Marker 60.13 dB*
45.1 MHz

Res.BW 120 kHz [imp] Vid.Bw 100 kHz
TG.Lvl Off
CF.Stp 97.000 MHz
Unit 0 dB
[dBμV/m]

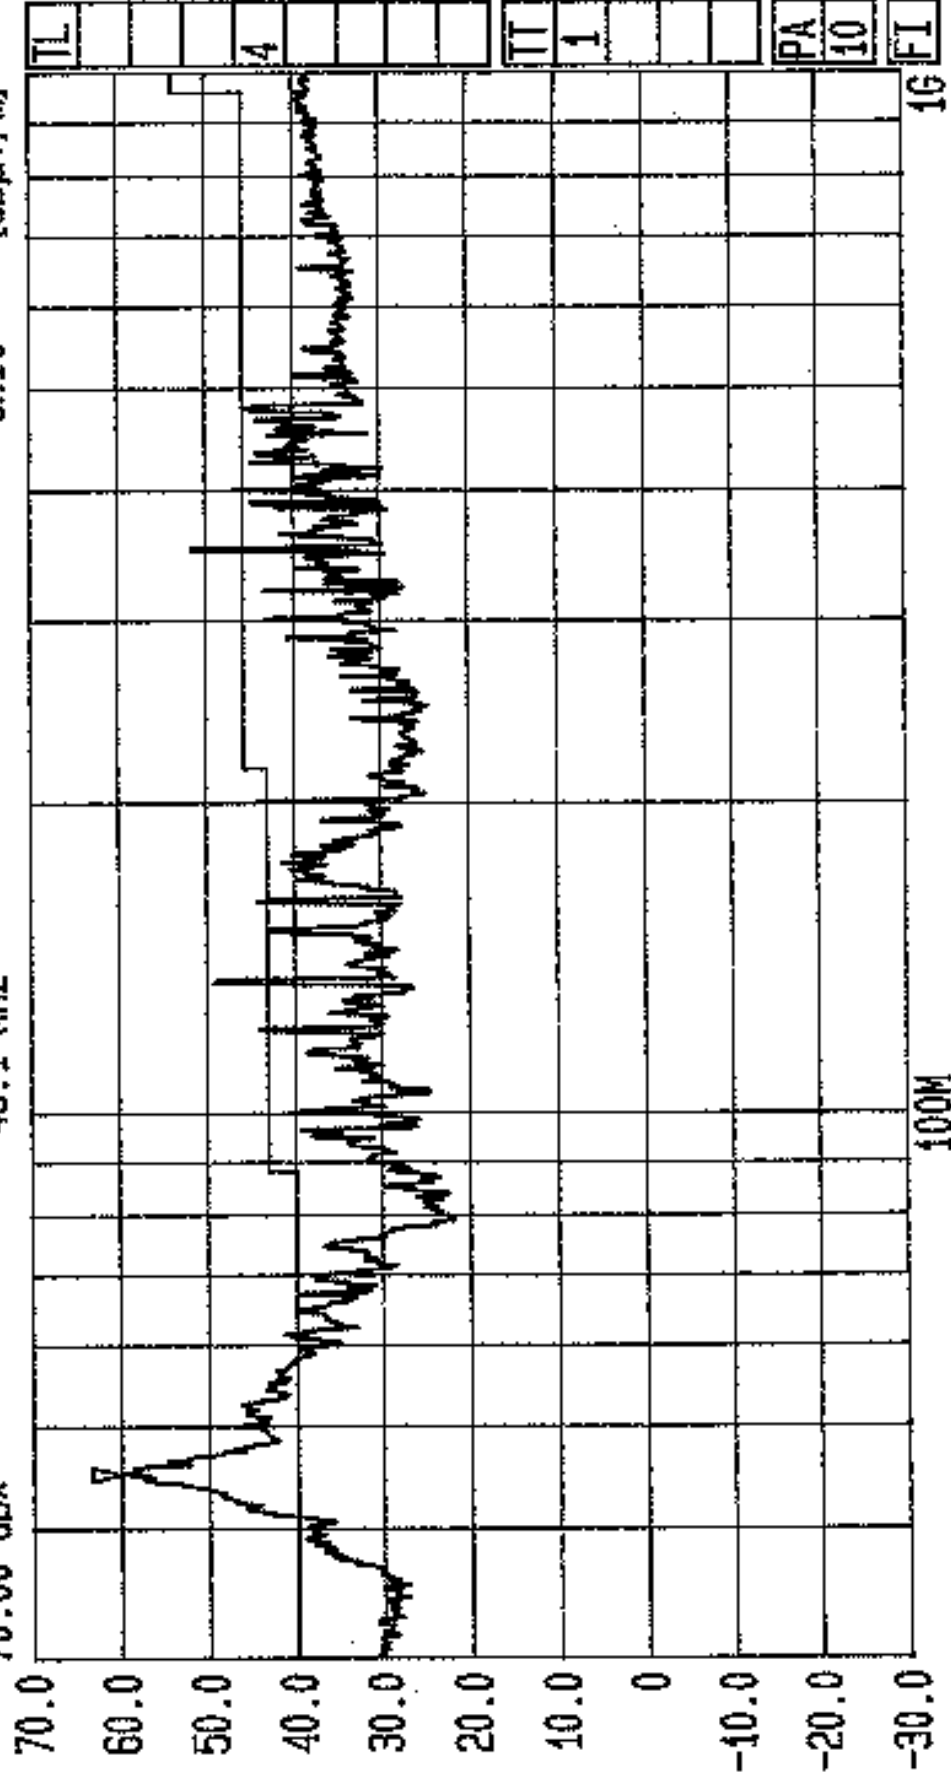


Start 30 MHz Span 970 MHz Center 173.2 MHz Sweep 380 ms Stop 1 GHz
Radiated. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit
Limit. FCC Part 15.407 (b) (5) 5.25-5.35 GHz Band. Top Channel. 6PH/38658/JD04/004



Date 26.Mar.'99 Time 16:12:14
Ref.Lvl 70.00 dB*
Marker 56.14 dB*
45.1 MHz

Res.BW 120 kHz [imp] Vid.BW 100 kHz
T6.Lvl Off
CF.Stp 97.000 MHz
Unit 0 dB
[dBuV/m]

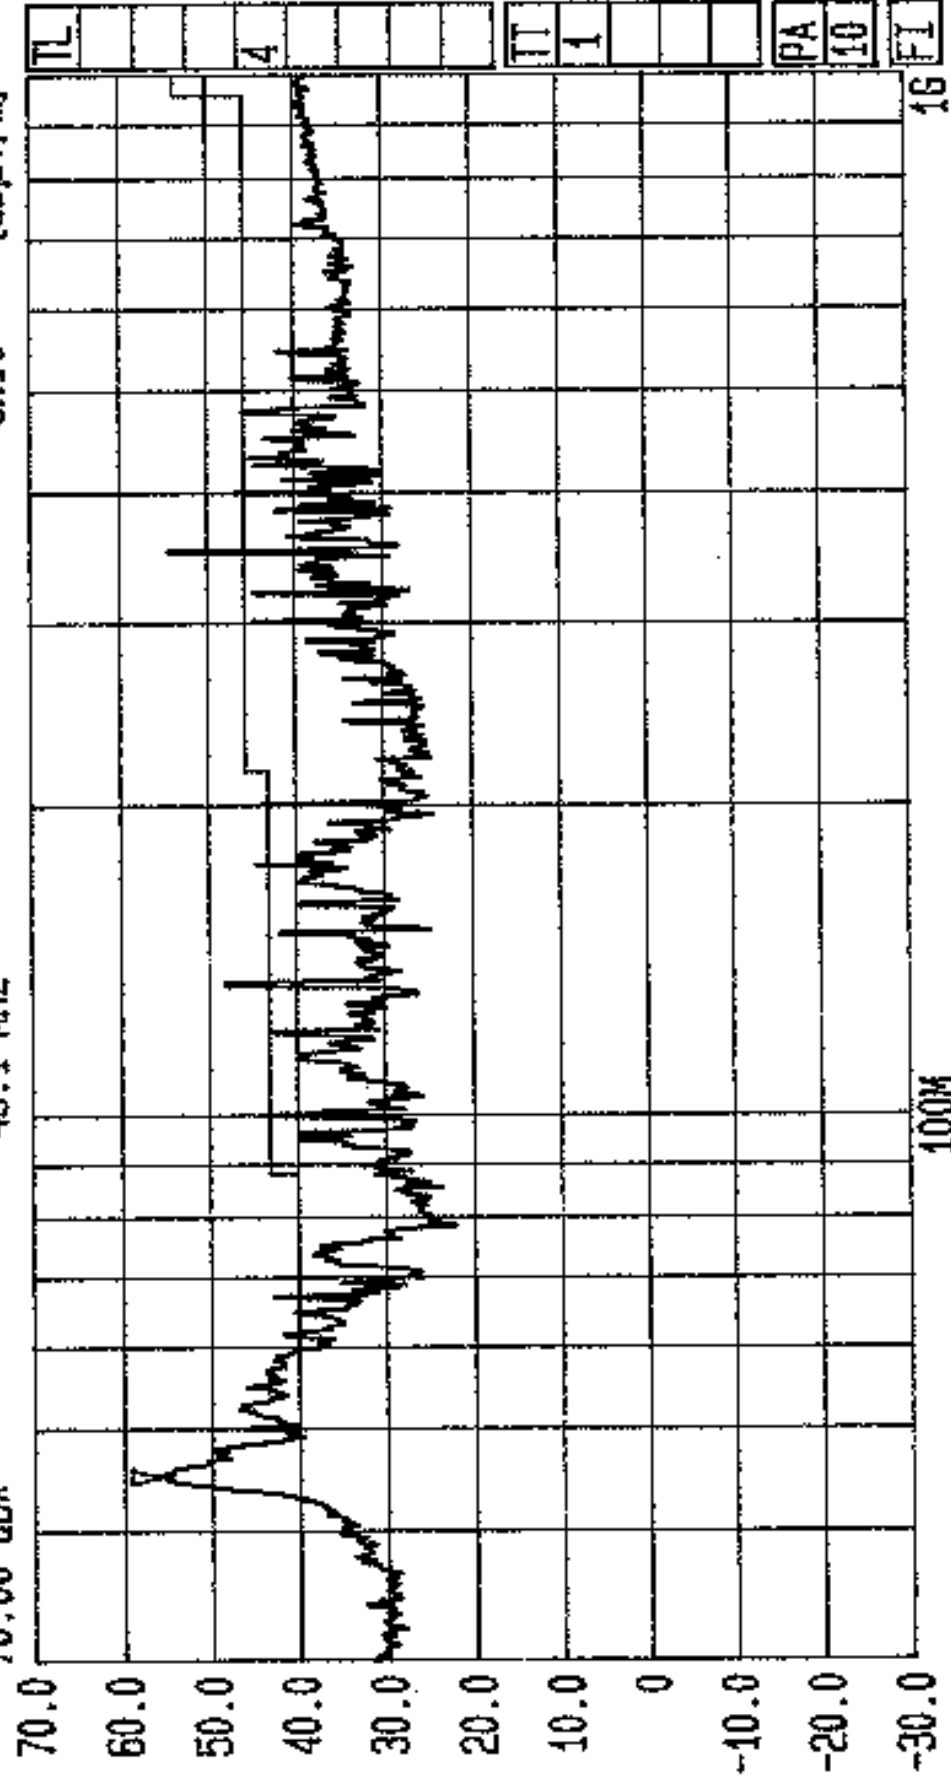

Start 30 MHz Stop 1 GHz
Span 970 MHz Sweep 380 ms
Center 173.2 MHz
Radiated. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit
Limit. FCC Part 15.407 (b) (5) 5.725-5.825 GHz Band. Bottom Chan. GPH/38658/JD04/005



Date 26.Mar.'99 Time 15:20:27

Ref.Lvl Marker

70.00 dB*

56.93 dB*

44.8 MHz

Res.Bw

16.Lvl

CF.Stp

120 kHz [imp]

97.000 MHz


RF.Att

Unit

100 kHz

0 dB

[dB μ V/m]

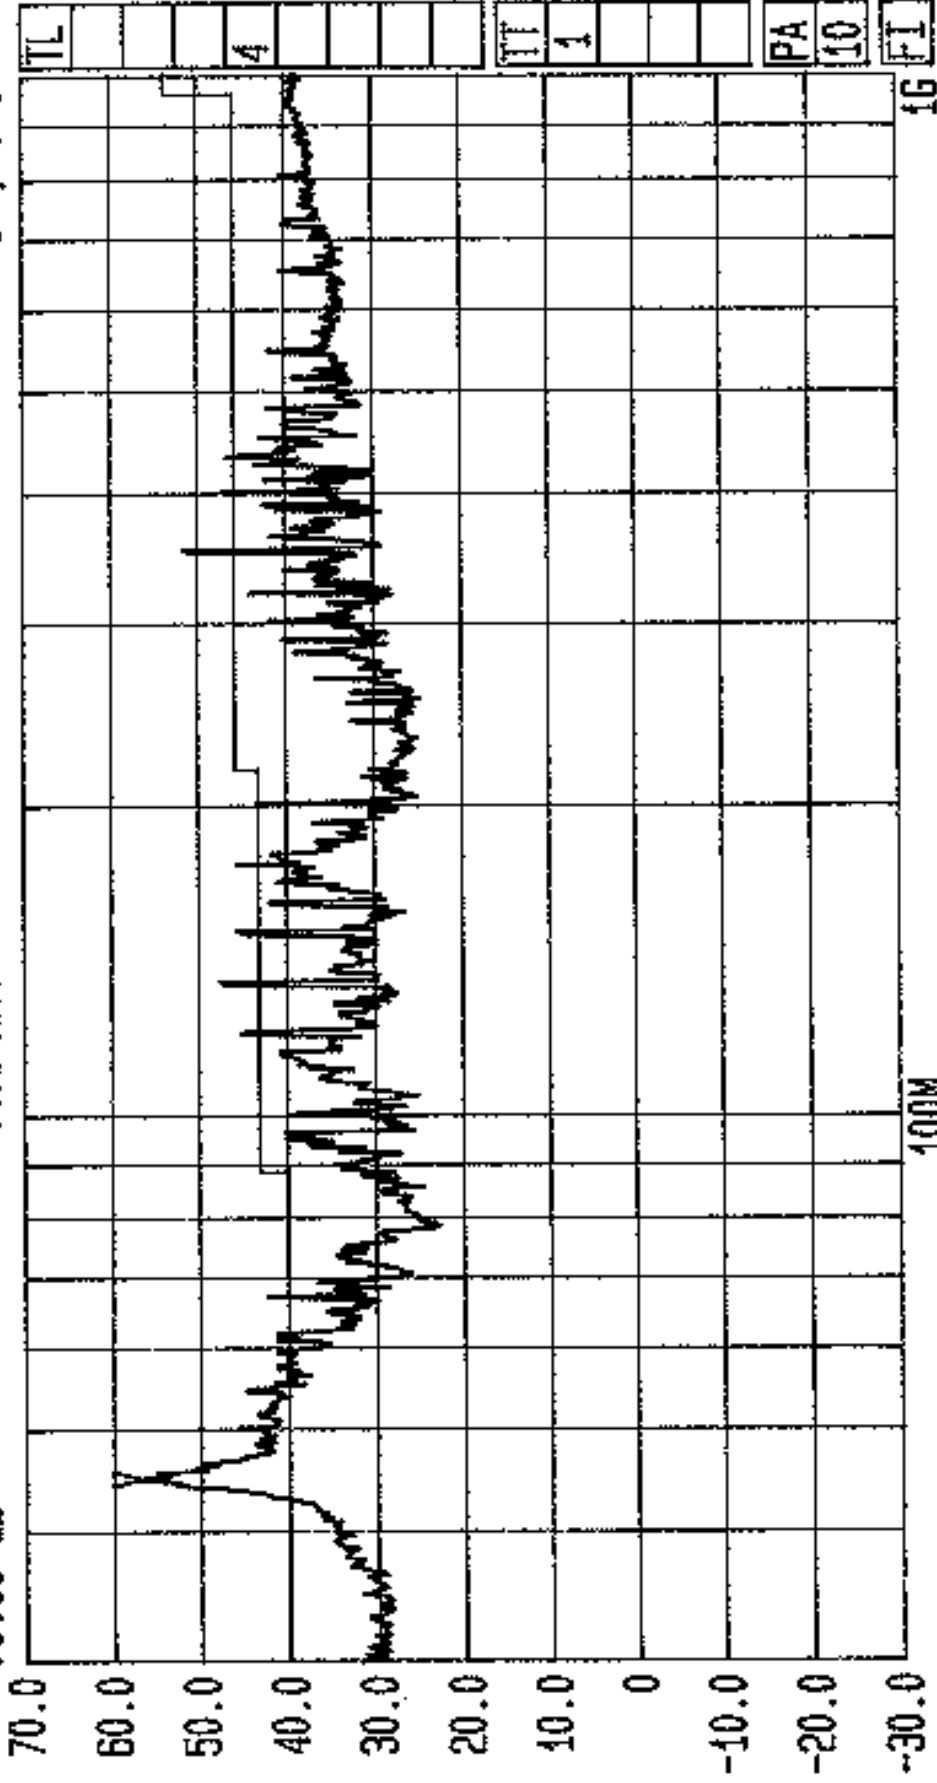

Start
30 MHz

Span
970 MHz

Center
173.2 MHz

Sweep
80 ms


Stop
1 GHz

Radiated: Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit
Limit: FCC Part 15.407 (b (5)) 5.725-5.825 GHz Band. Top Chan. 6PH/38658/JD04/006



Date 26.Mar.'99 Time 16:31:42
Ref.Lvl 70.00 dBx
Marker 54.79 dBx
351.9 MHz

Res.BW 120 kHz [imp]
TG.Lvl Off
CF.Stp 97.000 MHz
Vid.Bw 100 kHz
RF.Att 0 dB
Unit [dBμV/m]

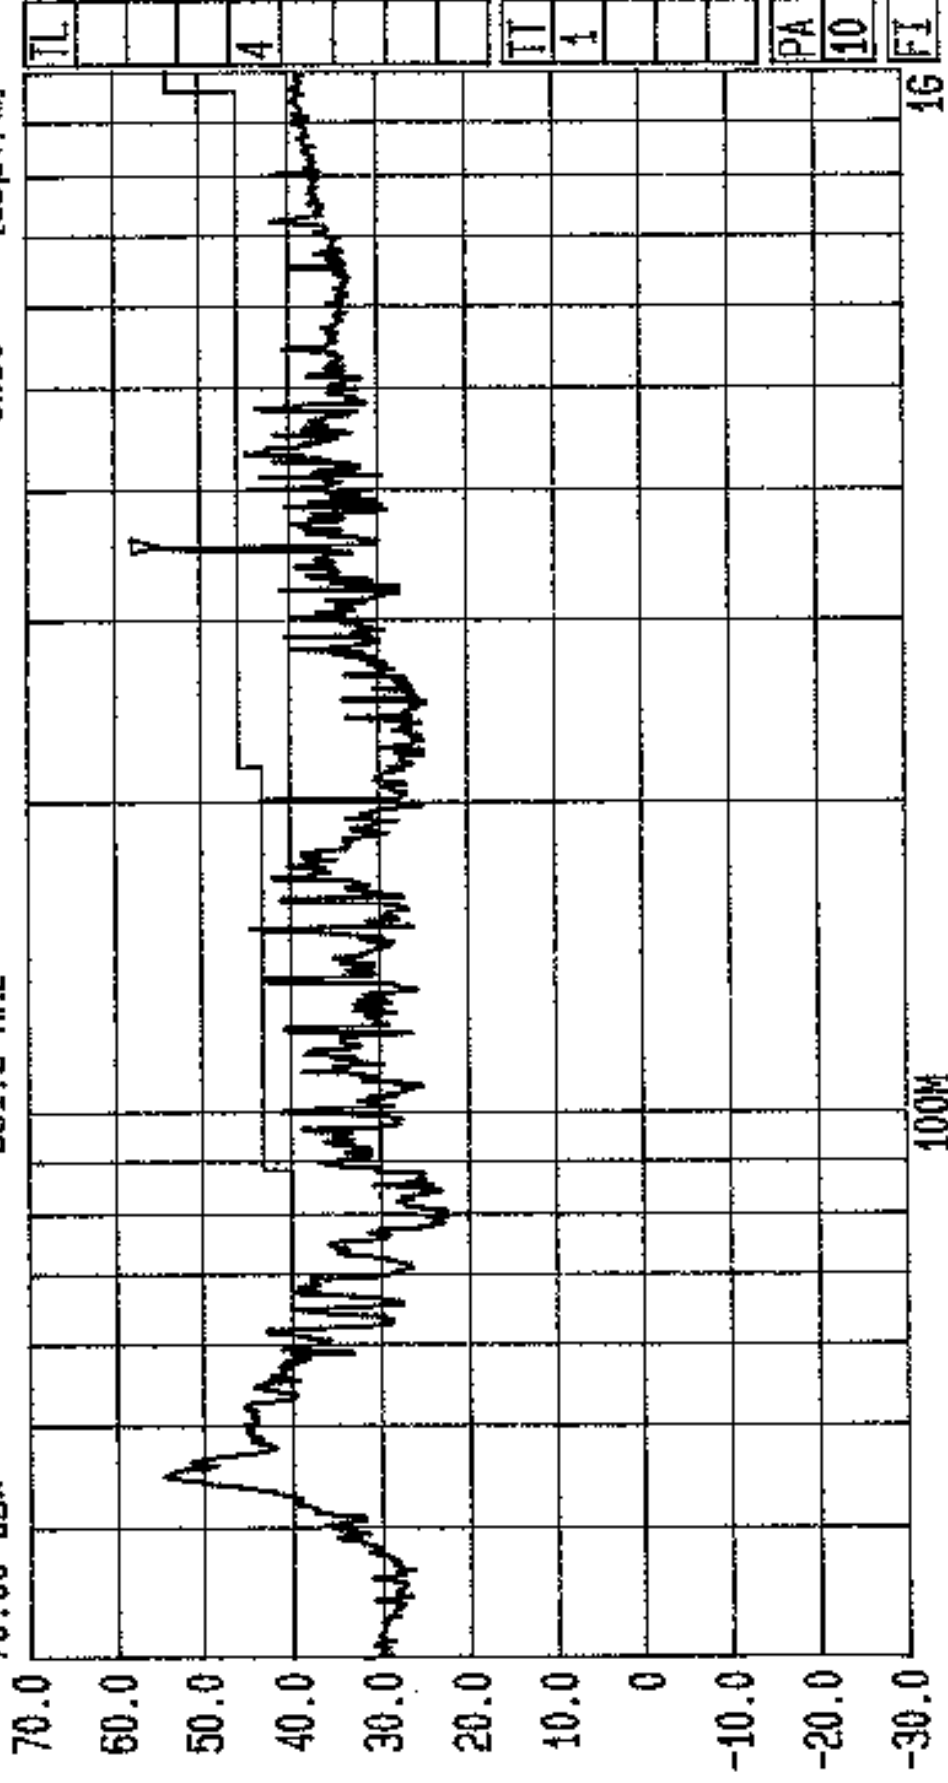


Start 30 MHz
Span 970 MHz
Center 173.2 MHz
Sweep 80 ms
Stop 1 GHz

Radiated. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit
Limit. FCC Part 15.405 (b). Receive Mode. S.15-5.2.5 GHz BAND. GPH/38658/JD04/007
BOTTOM CHANNEL.



Date 26.Mar.'99 Time 16:49:04
Ref.Lvl 70.00 dBx
Marker 57.44 dBx
44.8 MHz

Res.BW 120 kHz [imp]
TG.Lvl Off
CF.Stp 97.000 MHz
Vid.BW 100 kHz
RF.Att 0 dB
Unit [dBuV/m]

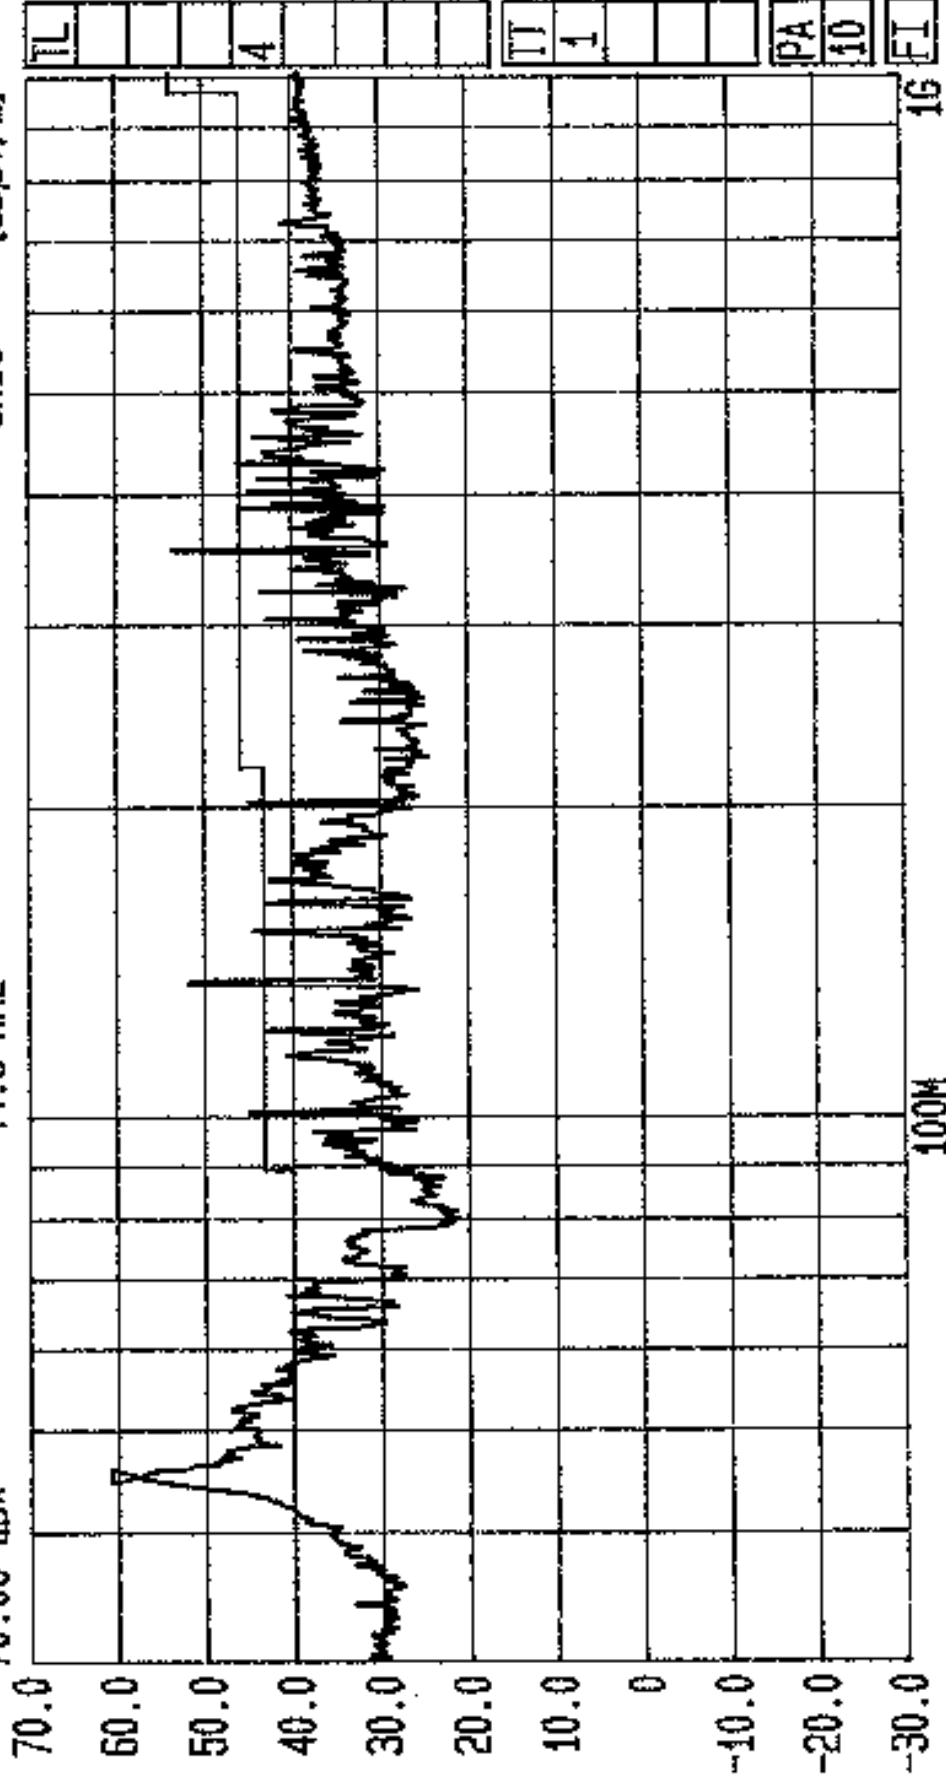


Start 30 MHz
Span 970 MHz
Center 173.2 MHz
Sweep 80 ms
Stop 1 GHz

Radiated. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit
Limit. FCC Part 15.405 (b) Rx Mode. 5.15-5.25 GHz Band. Top Chan. 6PH/38658/JD04/008



Date 26.Mar.'99 Time 16:57:11
Ref.Lvl 70.00 dB* Marker
57.82 dB* 44.9 MHz

Res.Bw 120 kHz [imp] Vid.Bw 100 kHz
TG.Lvl Off
CF.Stp 97.000 MHz
AF.Att 0 dB
Unit [dB μ V/m]

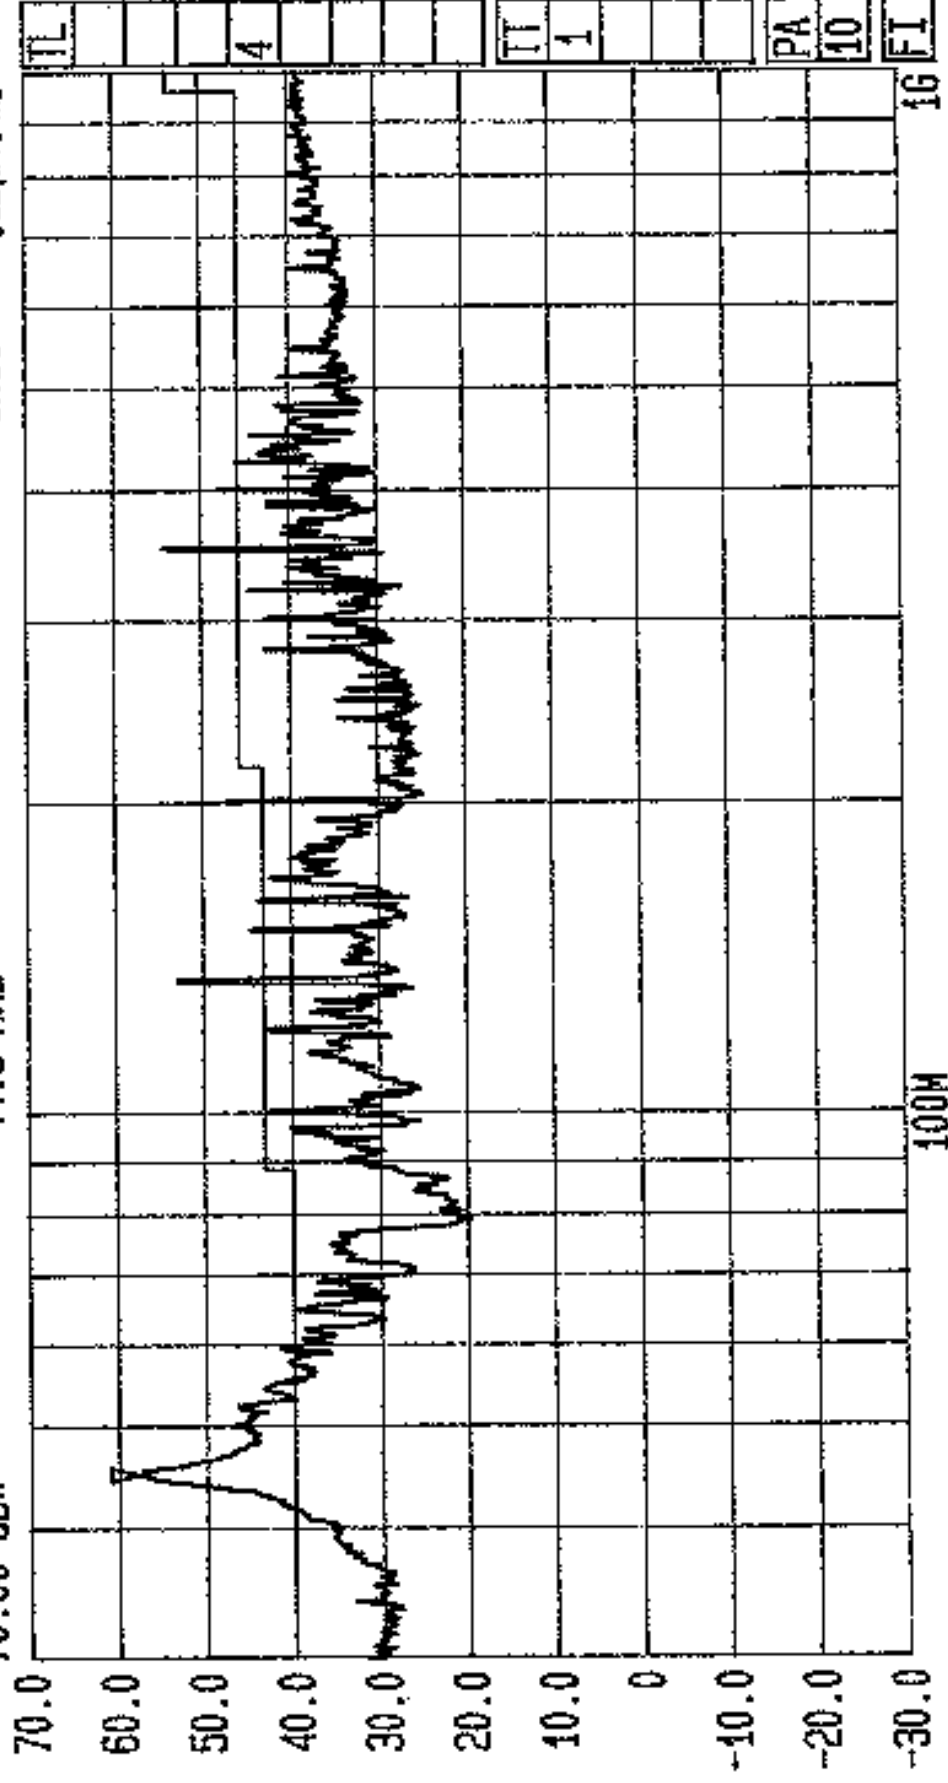

Start 30 MHz Span 970 MHz Center 173.2 MHz Sweep 80 ms Stop 1 GHz
Radiated. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit
Limit. FCC Part 15.405 (b) Rx Mode. 5.25-5.35 GHz Band. Bot Chan. 6PH/38658/JD04/009



Date 26.Mar.'99 Time 17:03:18


Ref.Lvl 70.00 dB* Marker

56.24 dB*
44.9 MHz

Res.BW
TG.Lvl
CF.Stp

120 kHz [imp]
Off
97.000 MHz

Vid.Bw 100 kHz
RF.Att 0 dB
Unit [dBuV/m]

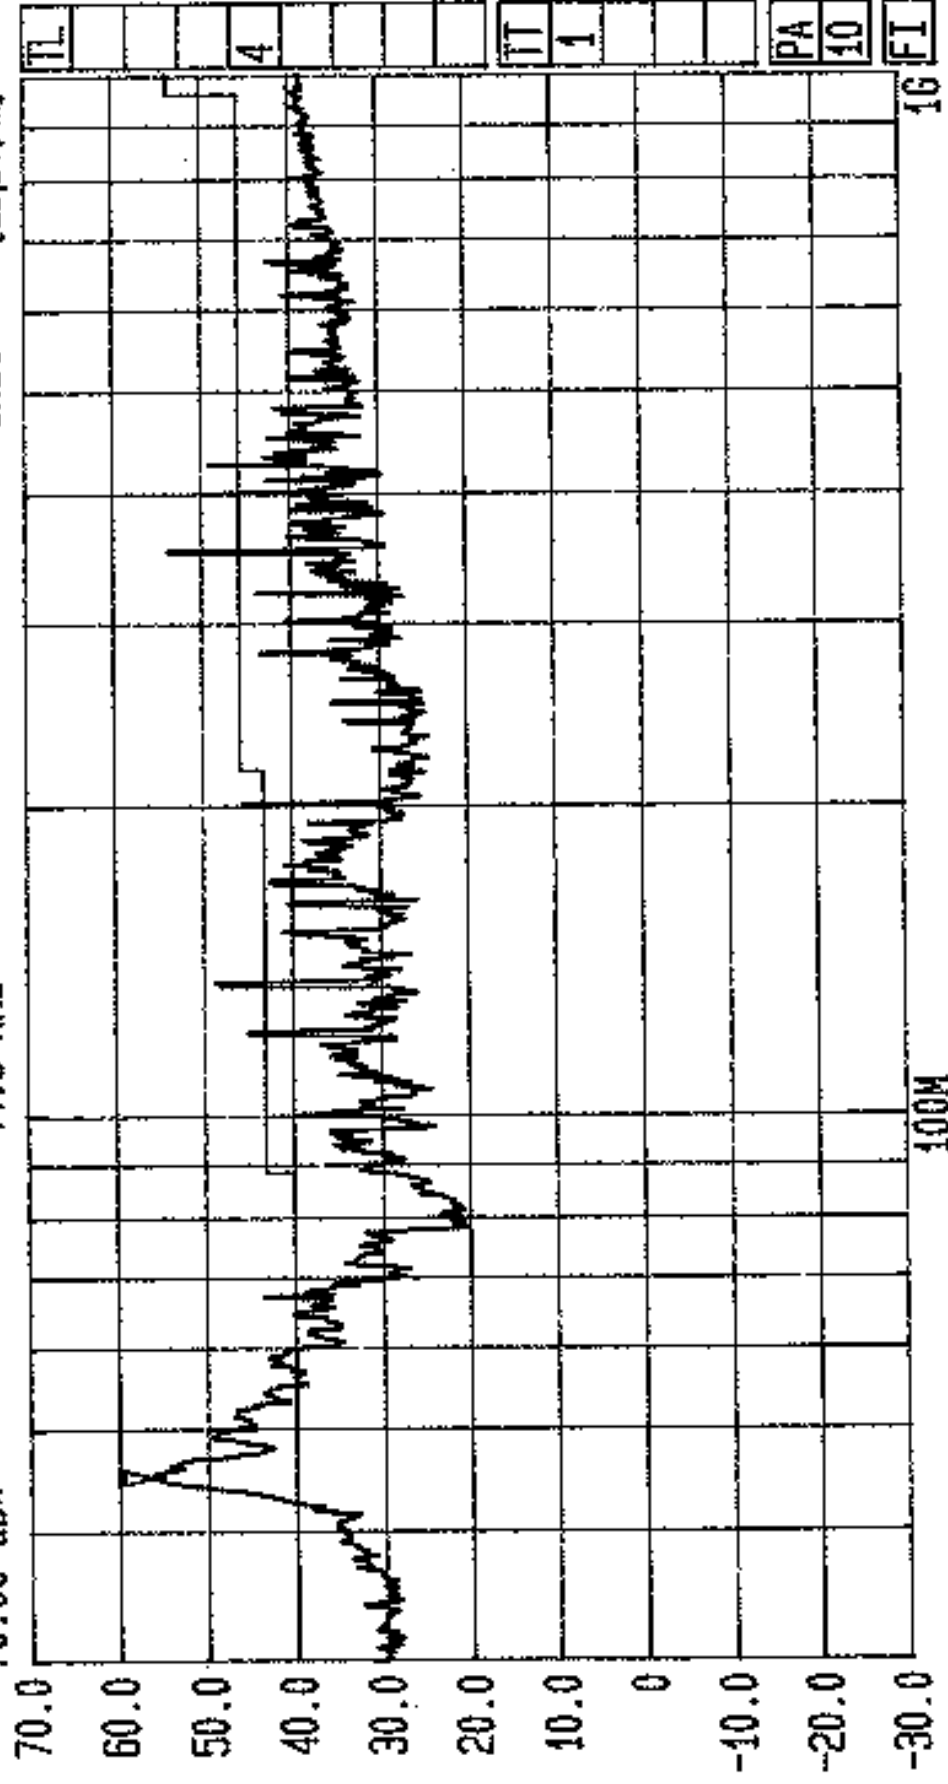


Start 30 MHz Span 970 MHz Center 173.2 MHz Sweep 380 ms Stop 1 GHz
Radiated. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit
Limit. FCC Part 15.405 (b) Rx Mode. 5.25-5.35 GHz Band. Top Chan. 6PH/38658/JD04/010



Date 26.Mar.'99 Time 17:15:07
Ref.Lvl 70.00 dB* Marker
54.69 dB* 44.9 MHz

Res.BW 120 kHz [imp] Vid.BW 100 kHz
16.Lvl off
CF.Stp 97.000 MHz AF.Att 0 dB
Unit [dBμV/m]

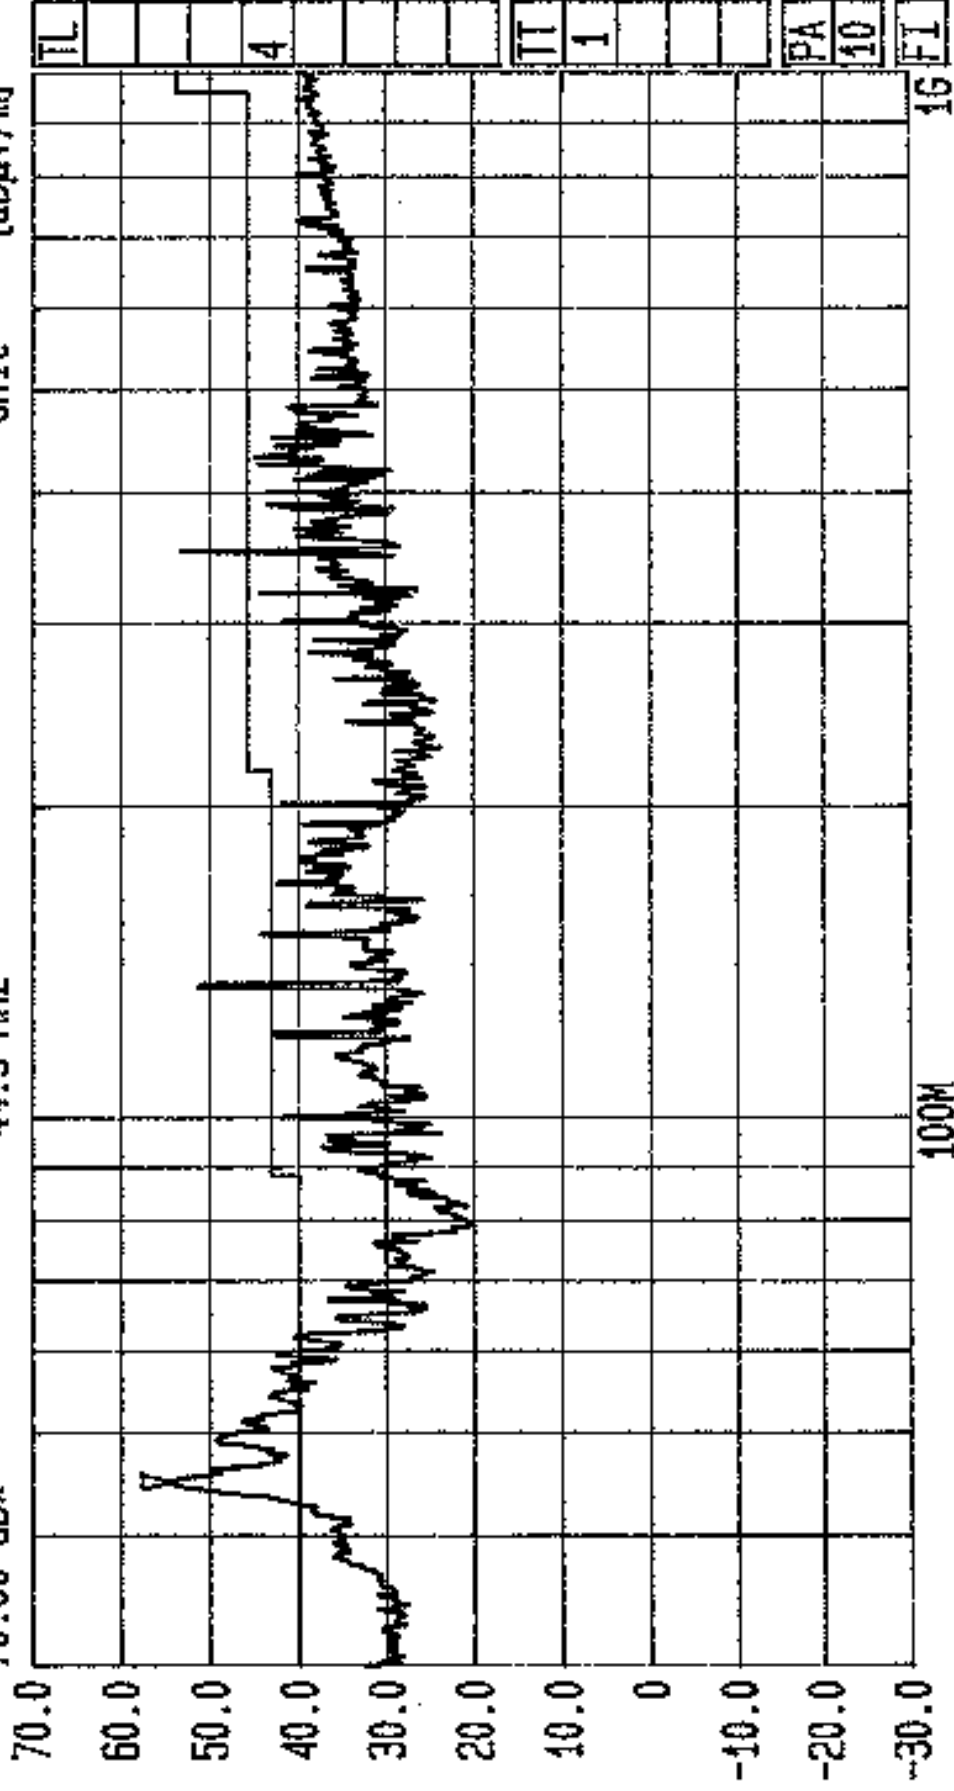

Start 30 MHz Span 970 MHz Center 173.2 MHz Sweep 80 ms Stop 1 GHz

Radiated, Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit
Limit. FCC Part 15.405 (b) Rx Mode. 5.725-5.835 GHzBand. Bot Chan.6PH/38658/JD04/011




Date 26.Mar.'99 Time 17:24:36

Ref.Lvl 70.00 dB* Marker

55.61 dB*
45.5 MHz

Res.BW 120 kHz [imp]
TG.Lvl 0 dB
CF.Stp

Vid.BW 100 kHz
RF.Att 0 dB
Unit [dBuV/m]

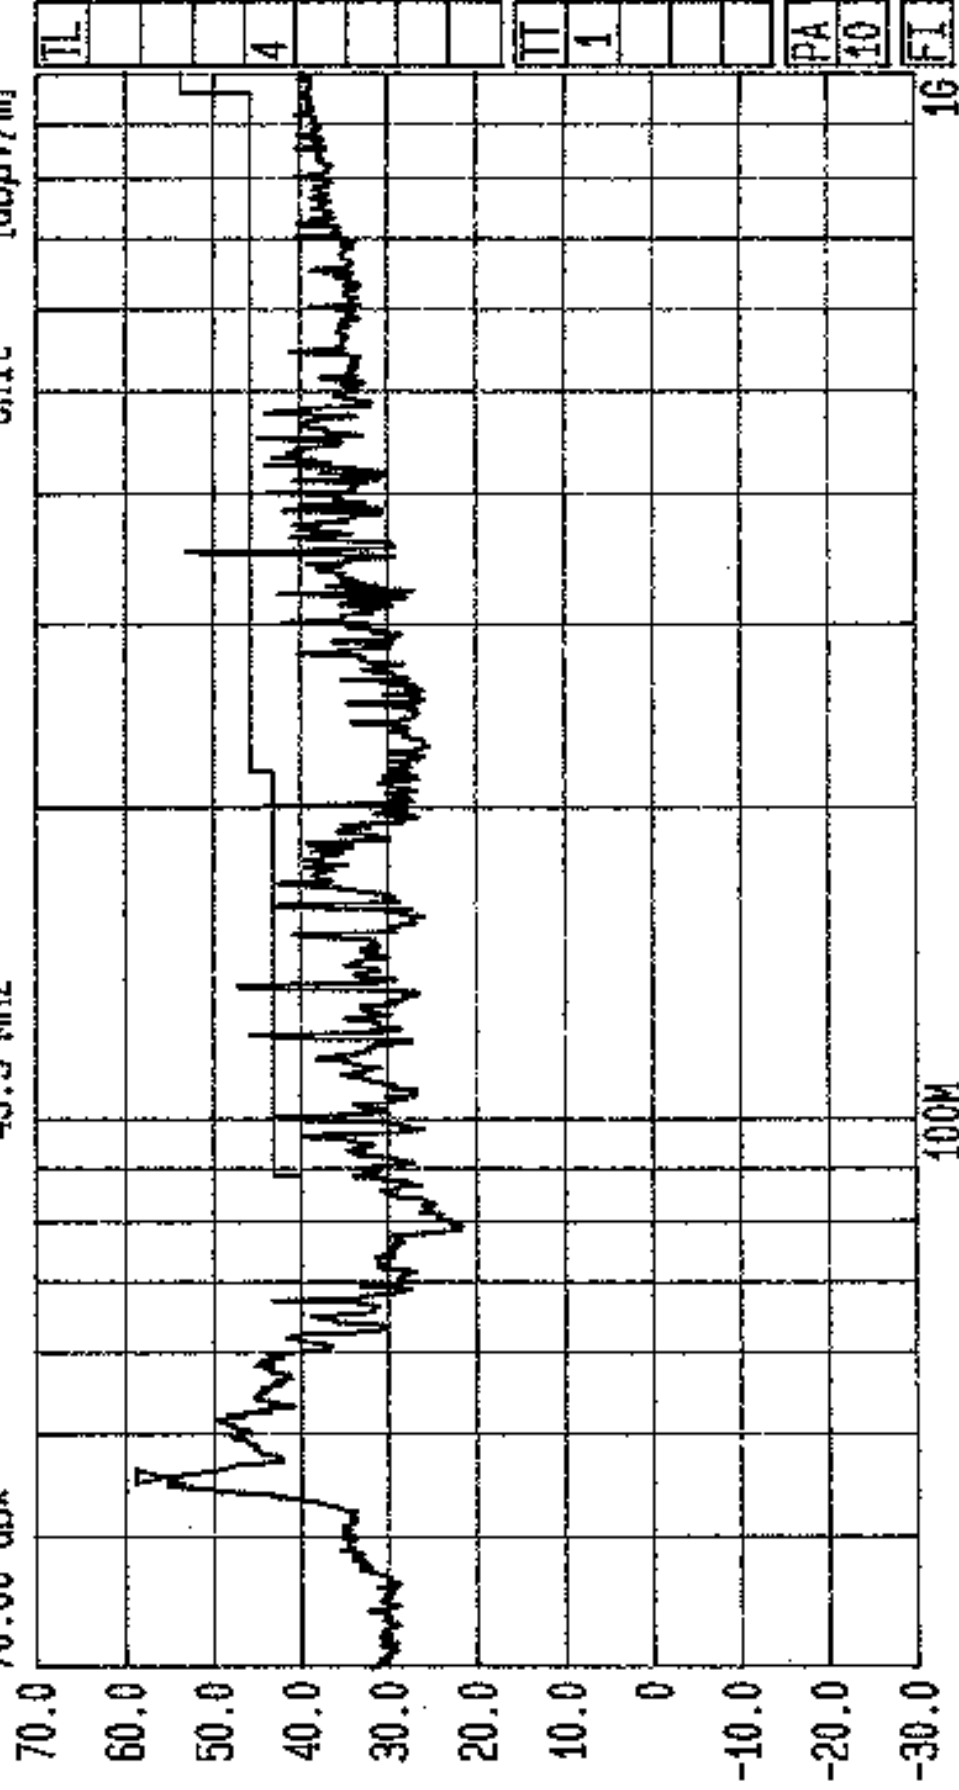

Start 30 MHz

Span 970 MHz

Center 173.2 MHz

Sweep 380 ms

Stop 1 GHz

Radiated. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit
Limit. FCC Part 15.405 (b) Rx Mode. 5.725-5.835 GHz Band. Top Chan.GPH/38658/J004/012



Date 30.Mar.'99 Time 10:06:13

Ref.Lvl Marker

46.80 dBμV

70.00 dBμV

837.0 kHz

Res.Bw

16.Lvl

Off

CF.Stp

9 kHz [imp]

off

2.955 MHz


RF.Att

Vid.Bw

10 kHz

10 dB

[dBμV]

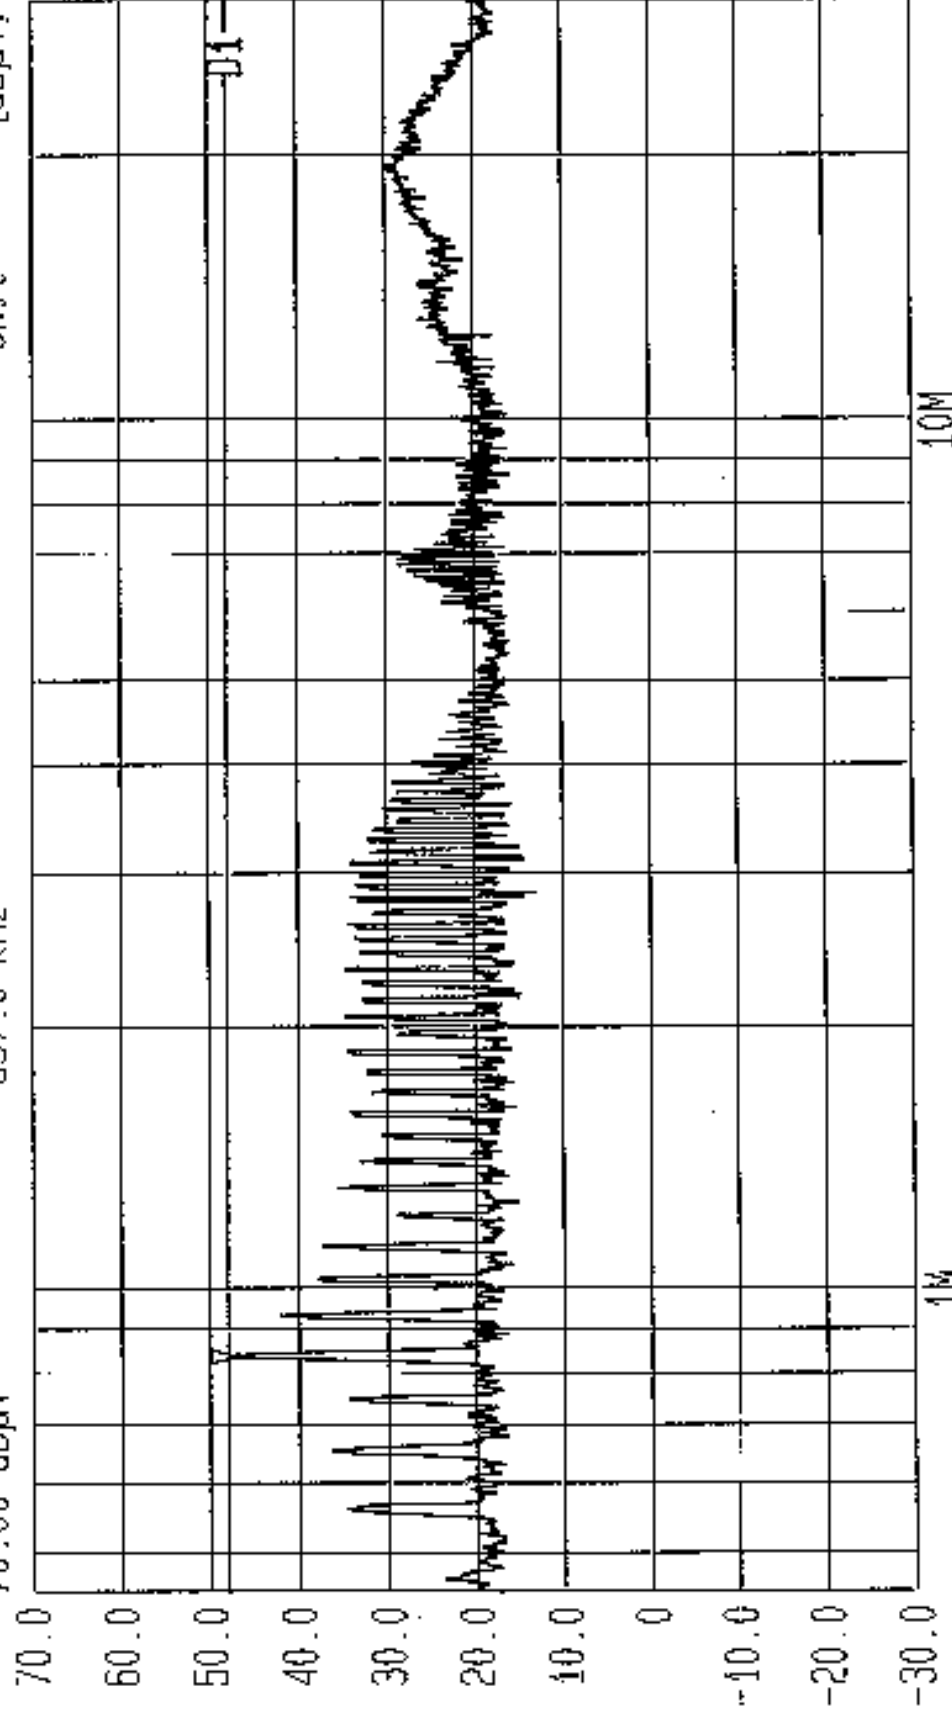

Start

450 kHz

Span

29.55 MHz

Center

3.67423 MHz

Sweep

2.2 s

Stop

30 MHz

Conducted, Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit
Limit. FCC Part 15.407 (b)(5). Rx. 5.15-5.25GHz. Bot Chan, Live GPH/38658/JD04/013



Date 30 Mar '99 Time 10:11:48

Ref.Lvl 70.00 dBuV

Marker 47.07 dBuV

840.9 kHz

Res.Bw

TG.Lvl

CF.Stp

9 kHz [imp]

Off

2.955 MHz

Vid.Bw


RF.Att

Unit

10 kHz

10 dB

[dBuV]

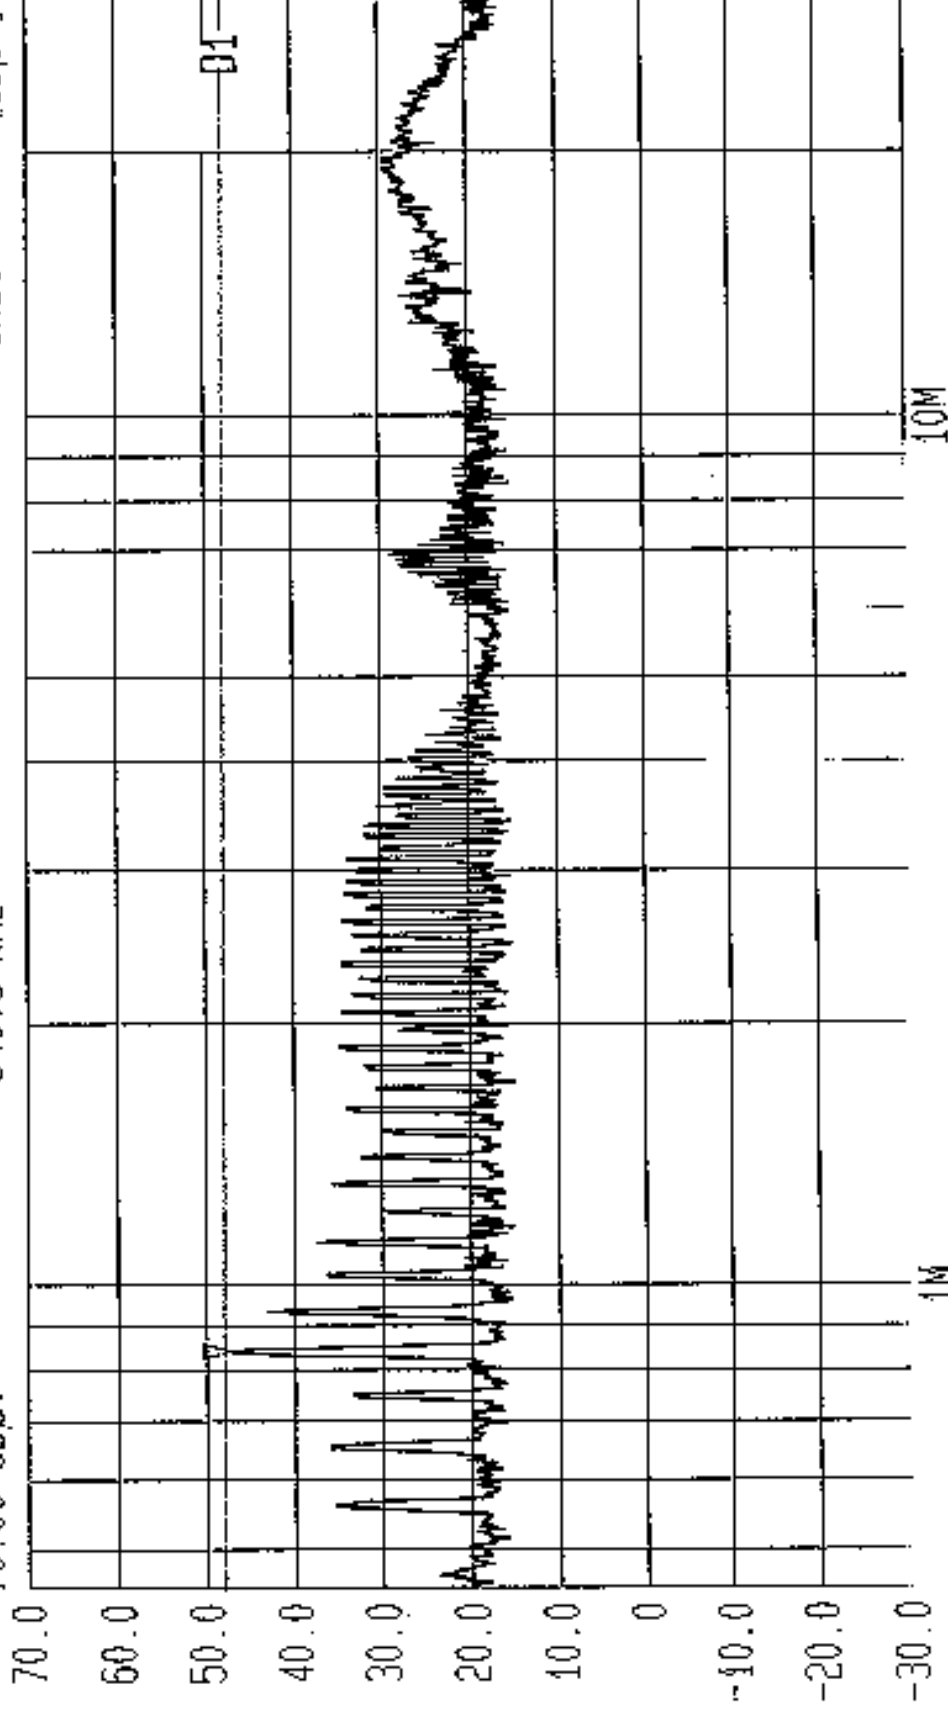


FI

Start 450 kHz Stop 30 MHz
Span 29.55 MHz Center 3.67423 MHz Sweep 2.25 MHz
Conducted, Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit
Limit, FCC Part 15.407 (b) (5) Rx: 5.15-5.25GHz. Top Chan. Live GPH/38658/JD04/014



Date: 30.Mar.'99 Time 10:30:04
Ref.Lvl Marker 47.25 dBuV
70.00 dBuV 840.9 kHz

Res.Bw 9 kHz [imp]
T.G.Lvl Off
CF.Stp 2.955 MHz
Vid.Bw 10 kHz
AF.Att 10 dB
Unit [dBuV]

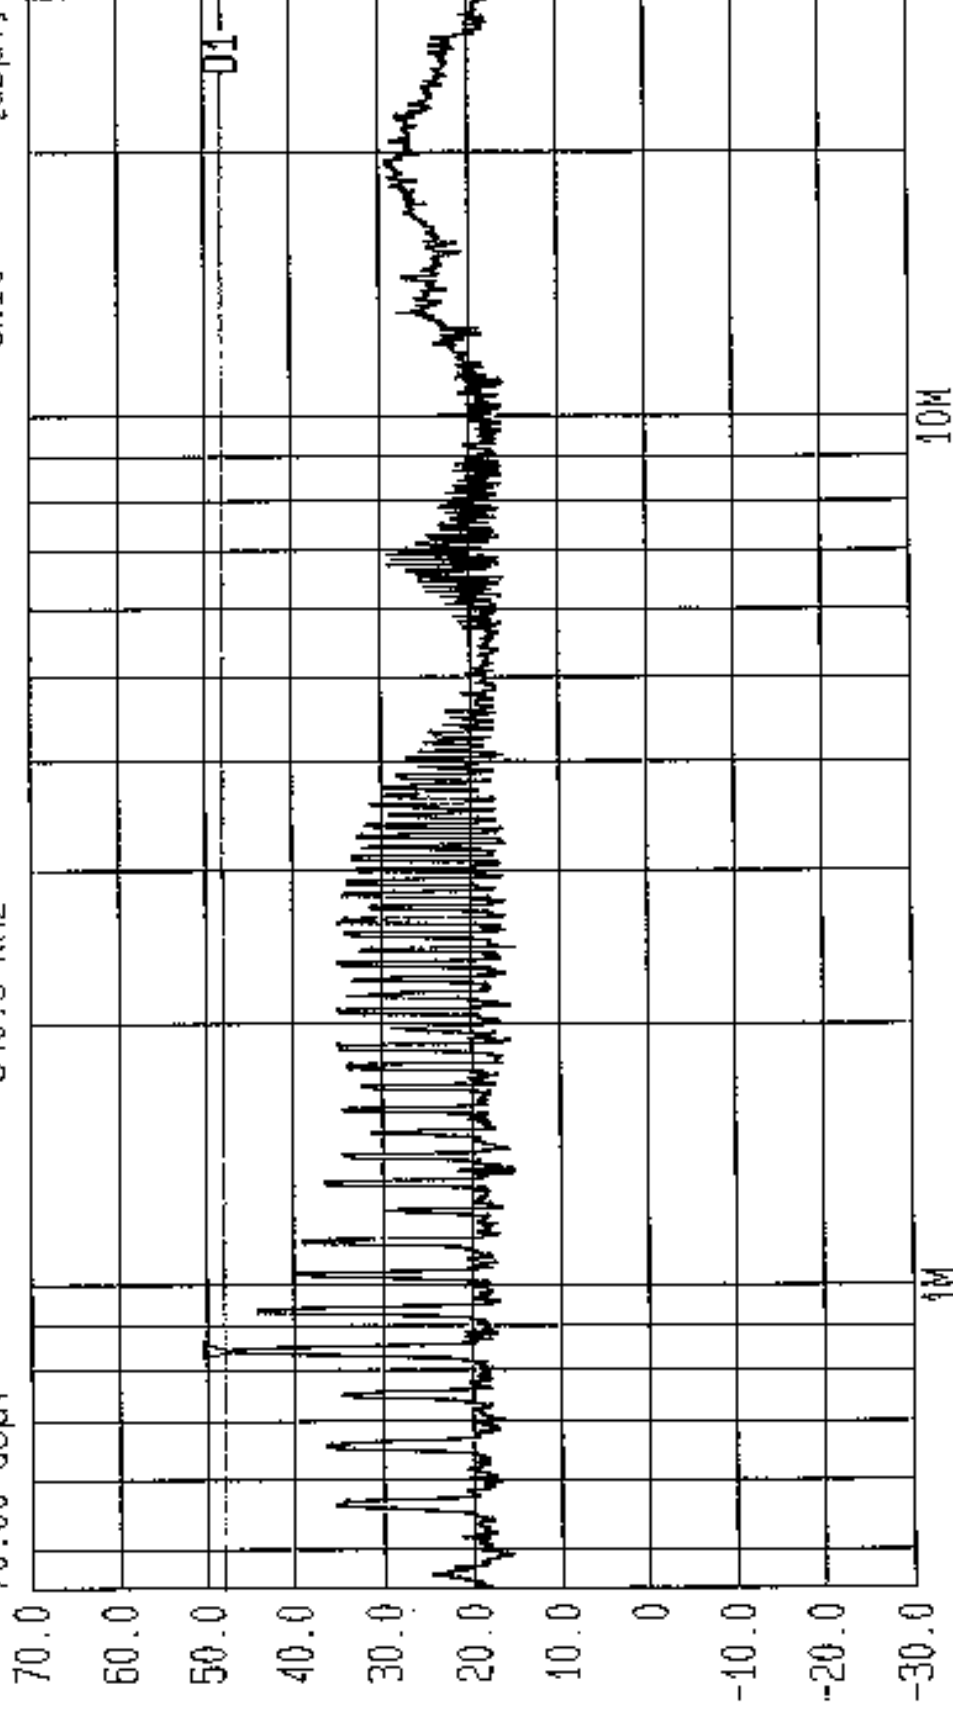

Start 450 kHz Stop 30 MHz
Span 29.55 MHz Sweep 2.2 s
Center 3.67423 MHz


Conducted. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit
Limit. FCC Part 15.407 (b (5)). Rx. 5.25-5.35GHz. Bot Chan. Live GPH/38658/JD04/015



Date 30.Mar.'99 Time 10:24:21

Ref.Lvl 70.00 dBμV
Marker 47.07 dBμV
840.9 kHz

Res.Bw 9 kHz [imp]
TG.Lvl Off
CF.Stp 2.955 MHz
Vid.Bw 10 kHz
RF.Att 10 dB
Unit [dBμV]

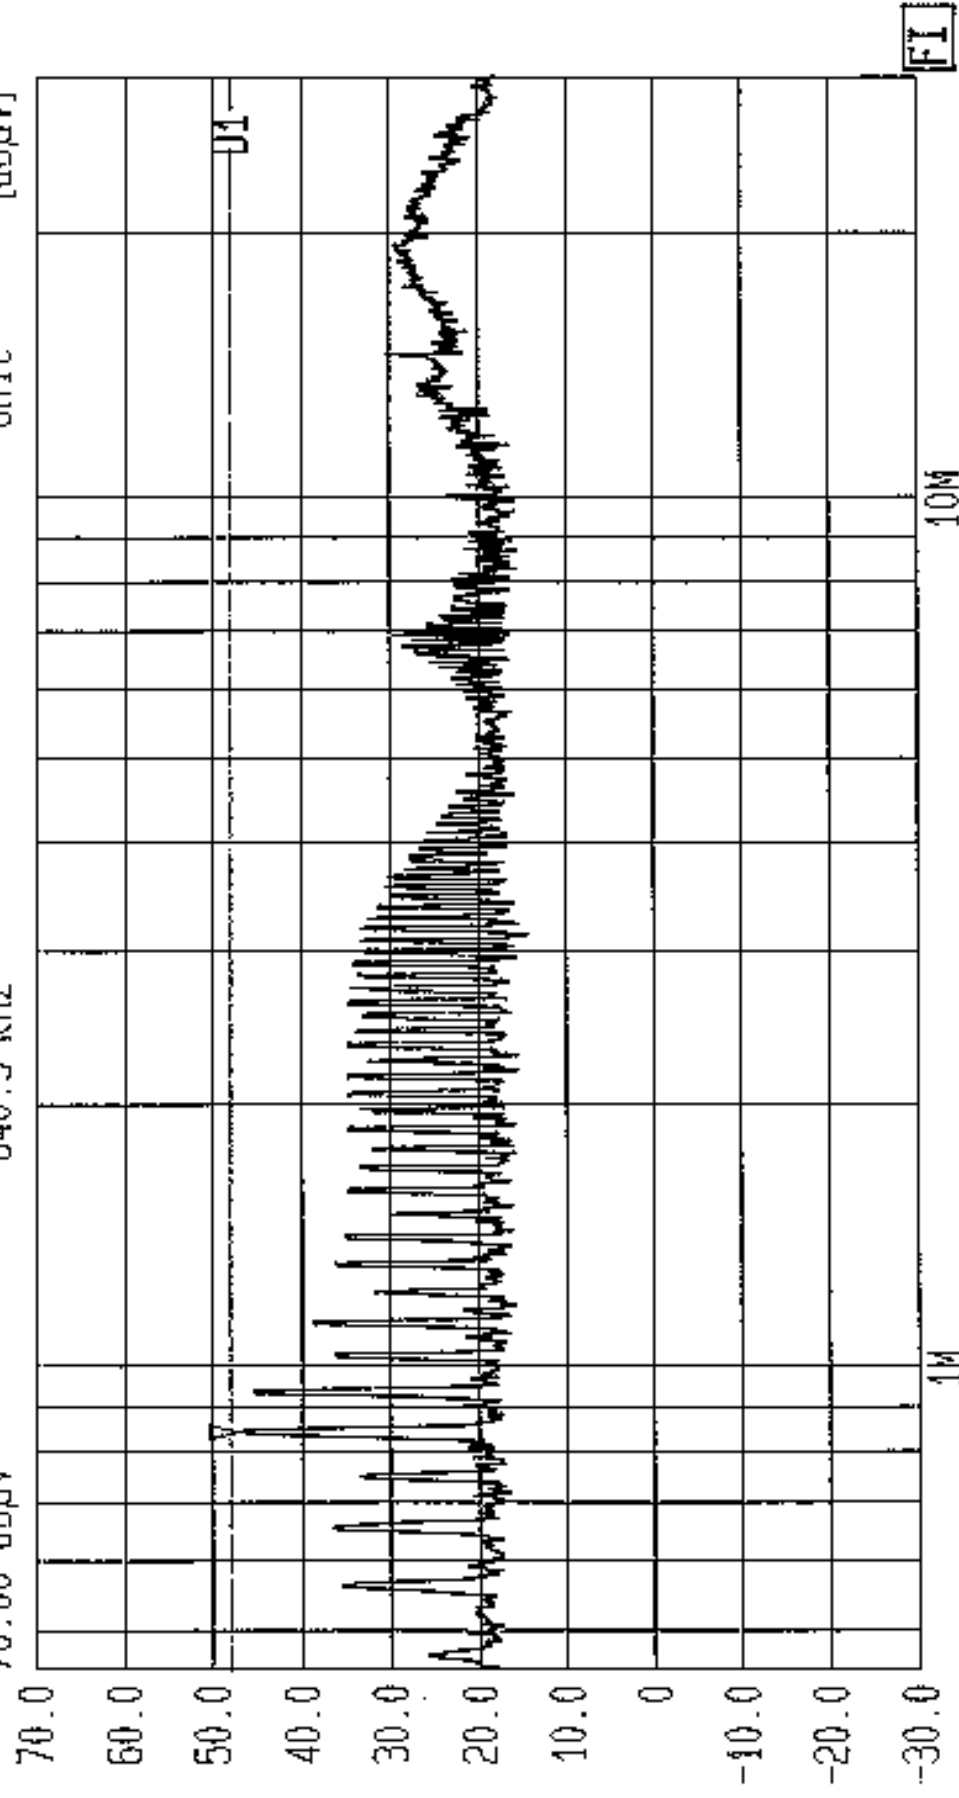


Start 450 kHz Span 29.55 MHz Center 3.67423 MHz Sweep 2.2 s Stop 30 MHz
Conducted, Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit
Limit. FCC Part 15.407 (b)(5). Rx. 5.25-5.35GHz. Top Chan. Live 6PH/38658/JD04/016



Date 30.Mar.'99 Time 10:35:50
Ref.Lvl Marker 47.07 dBμV
70.00 dBμV 840.9 kHz

Res.Bw 9 kHz [imp] Vid.Bw 10 kHz
IG.Lvl off
CF.Stp 2.955 MHz
AF.Att 10 dB
Unit [dBμV]

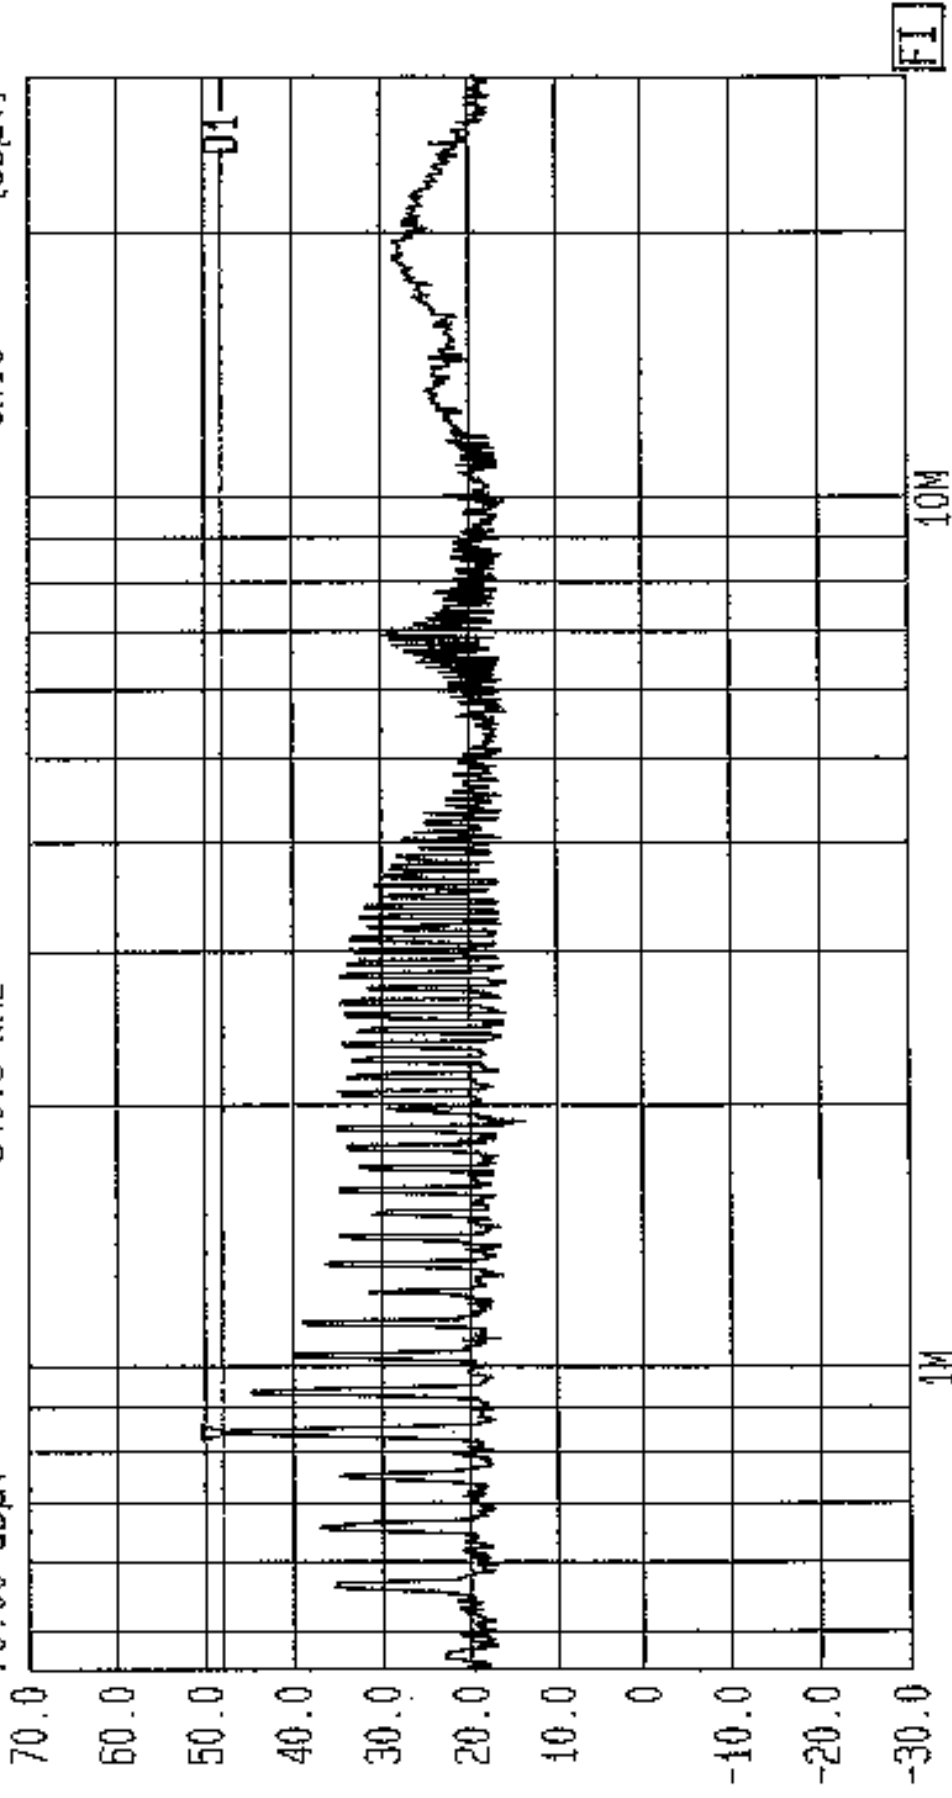

Start 450 kHz Span 29.55 MHz Center 3.67423 MHz Sweep 260 ms Stop 30 MHz
Conducted, Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit
Limit. FCC Part 15.407 (b)(5). Rx. 5.725-5.825GHz. Bot Chan. Live GPH/38658/JD04/017



Date 30.Mar.'99 Time 10:41:52

Ref.Lvl 70.00 dBμV

Marker 47.18 dBμV

840.9 kHz

Res.Bw

10.Lvl

CF.Stp

9 kHz [imp]

Off

2.955 MHz

Vid.Bw


RF.Att

Unit

10 kHz

10 dB

[dBμV]

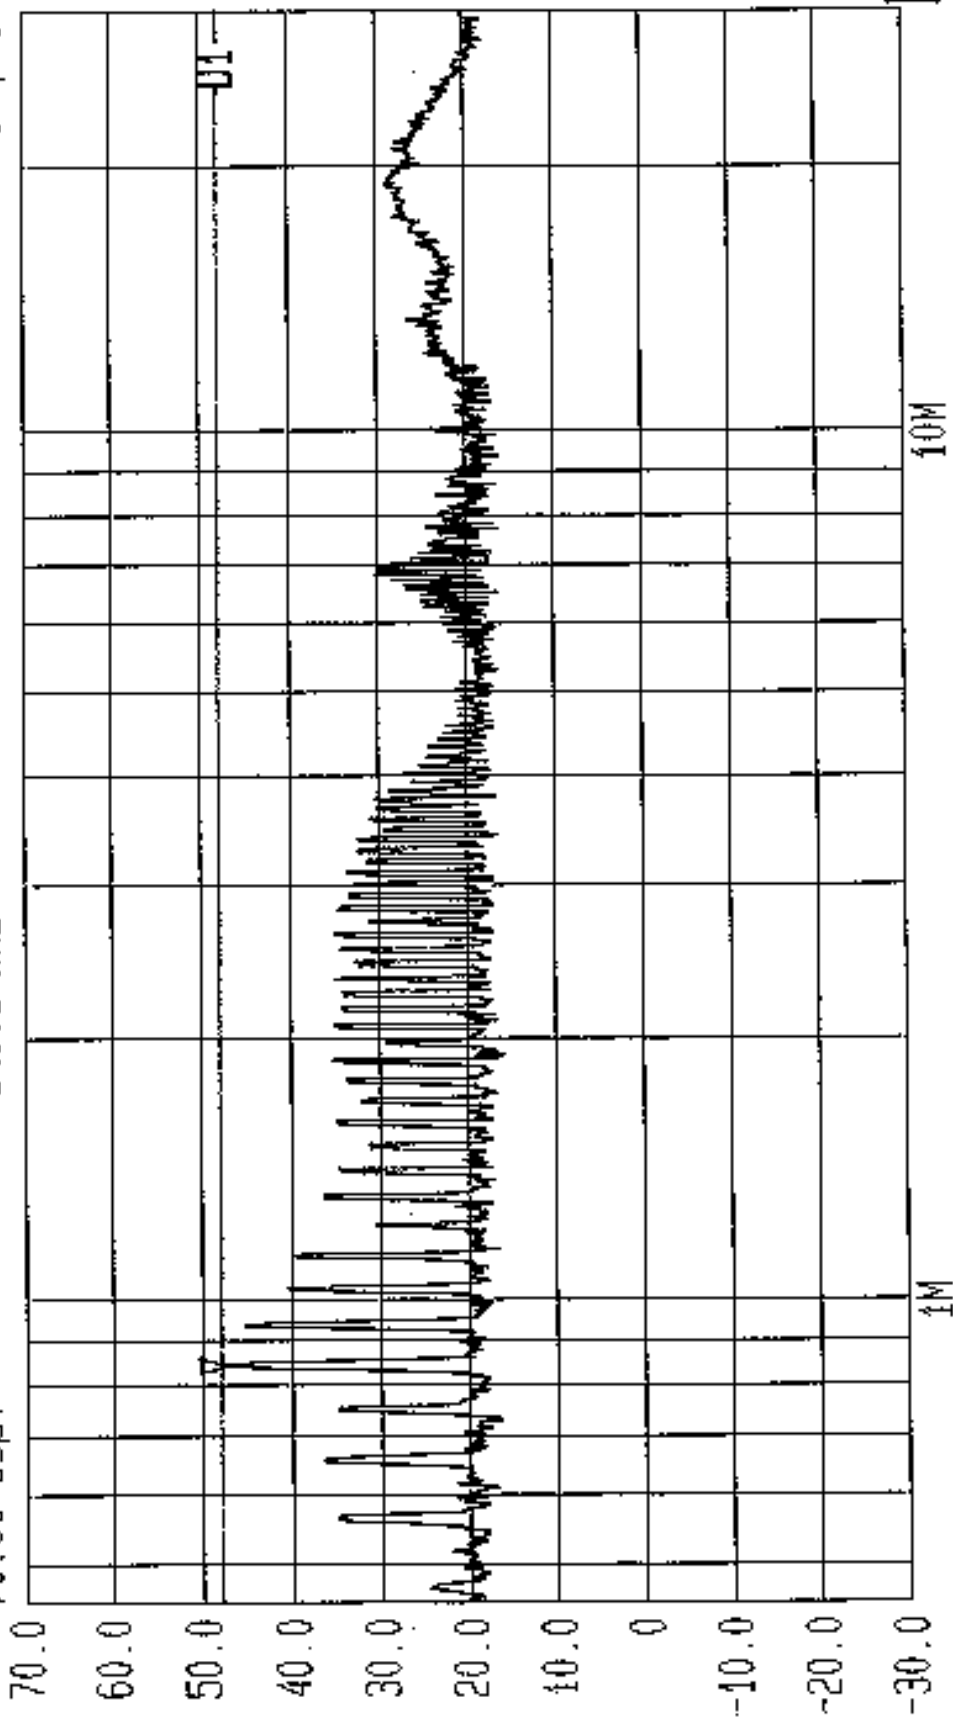

Start 450 kHz Span 29.55 MHz Center 3.67423 MHz Sweep 2.25 Stop 30 MHz


Conducted. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit
Limit. FCC Part 15.407 (b(5)). Rx. 5.725-5.825GHz. Top Chan. Live GPH/38658/J004/018



Date 30.Mar.'99 Time 10:47:27

Ref.Lvl 70.00 dBuV
Marker 46.87 dBuV
840.9 kHz

Res.Bw 9 kHz [imp]
FG.Lvl Off
CF.Stp 2.955 MHz
Vid.Bw 10 kHz
RF.Att 10 dB
Unit [dBuV]

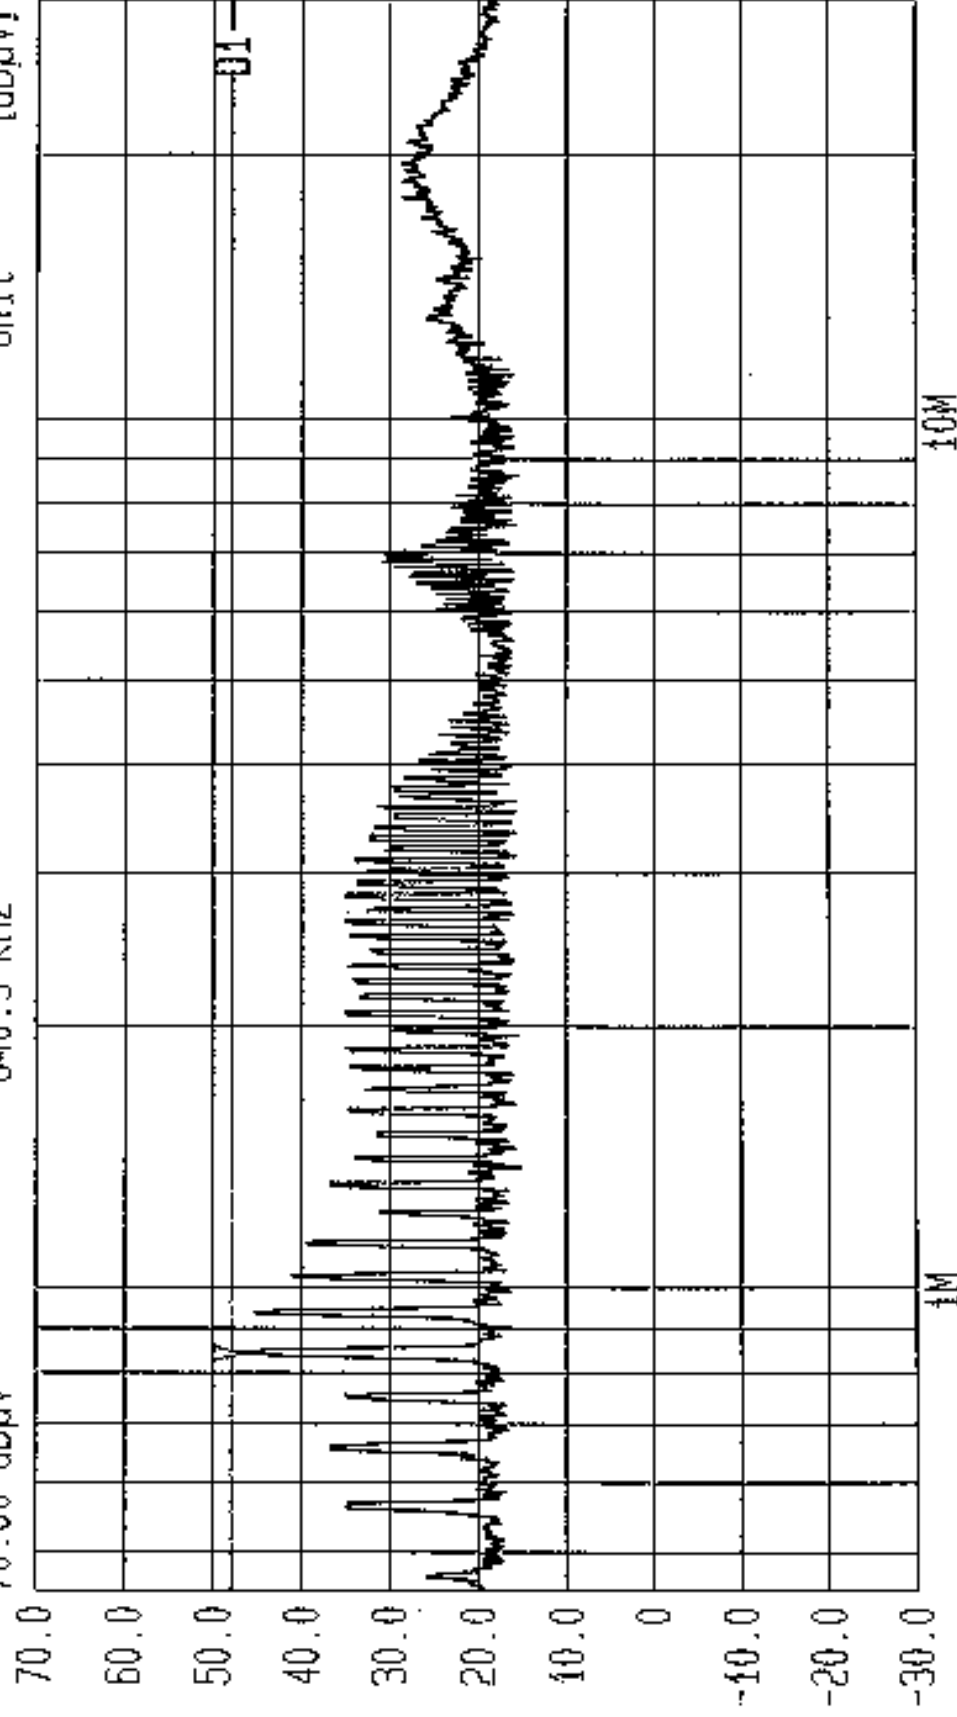

Start 450 kHz Stop 30 MHz
Span 29.55 MHz Sweep 2.2 s
Center 3.67423 MHz


Conducted. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit
Limit. FCC Part 15.407 (b (5)). Tx. 5.15-5.25GHz. Bot Chan. Live GPH/38658/JD04/019



Date 30.Mar.'99 Time 10:53:06

Ref.Lvl 70.00 dBμV
Marker 46.64 dBμV
840.9 kHz

Res.Bw 9 kHz [imp]
T6.Lvl Off
CF.Stp 2.955 MHz
Vid.Bw 10 kHz
HF.Att 10 dB
Unit [dBμV]

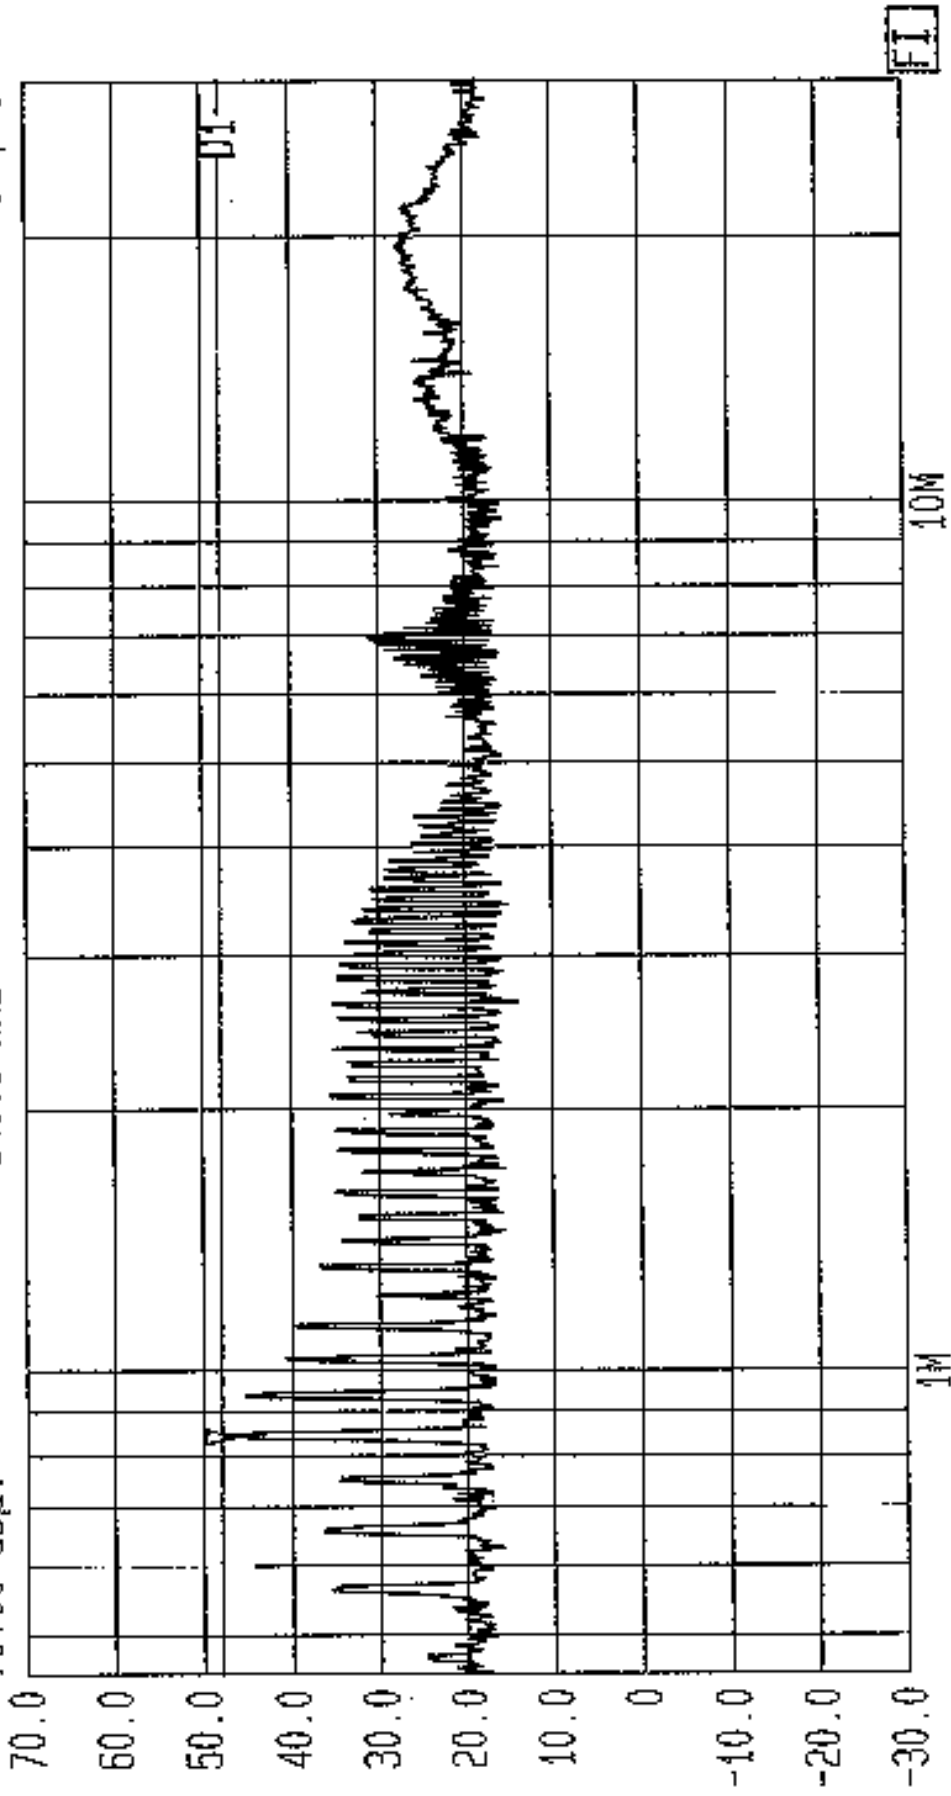

Start 450 kHz
Span 29.55 MHz
Center 3.67423 MHz
Sweep 2.2 s
Stop 30 MHz


Conducted. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit
Limit. FCC Part 15.407 (b (5)). Tx. 5.15-5.25GHz. Top Chan. Live GPH/38658/J004/020



Date 30.Mar.'99 Time 10:58:38

Ref.Lvl 70.00 dBμV
Marker 46.57 dBμV
840.9 kHz

Res.Bw 9 kHz [imp]
1G.Lvl off
CF.Stp 2.955 MHz
Vid.Bw 10 kHz
RF.Att 10 dB
Unit [dBμV]

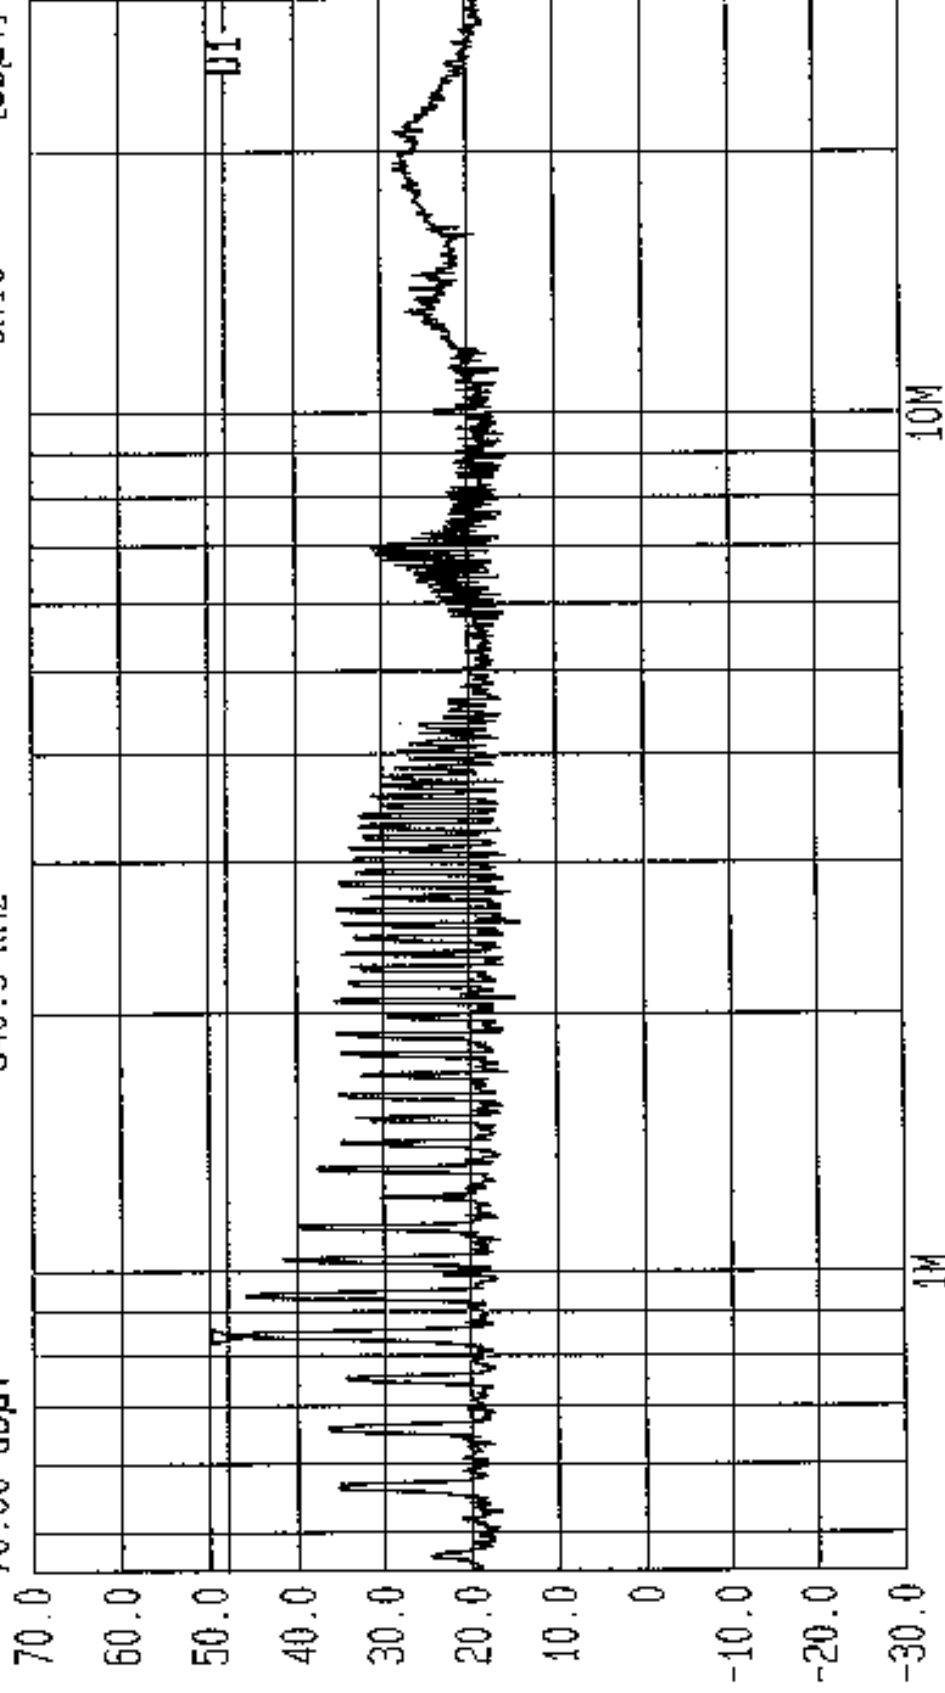


Start 450 kHz
Span 29.55 MHz
Center 3,67423 MHz
Sweep 2.2 s
Stop 30 MHz

Conducted. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit
Limit. FCC Part 15.407 (b)(5). Tx. 5.25-5.35GHz. Bot Chan. Live GPH/38658/J004/021



Date 30.Mar.'99 Time 11:04:20
Ref.Lvl 70.00 dBuV
Marker 46.31 dBuV
840.9 kHz

Res.BW 9 kHz [imp]
IG.Lvl off
CF.Stp 2.955 MHz
Vid.Bw 10 kHz
RF.Att 10 dB
Unit [dBuV]

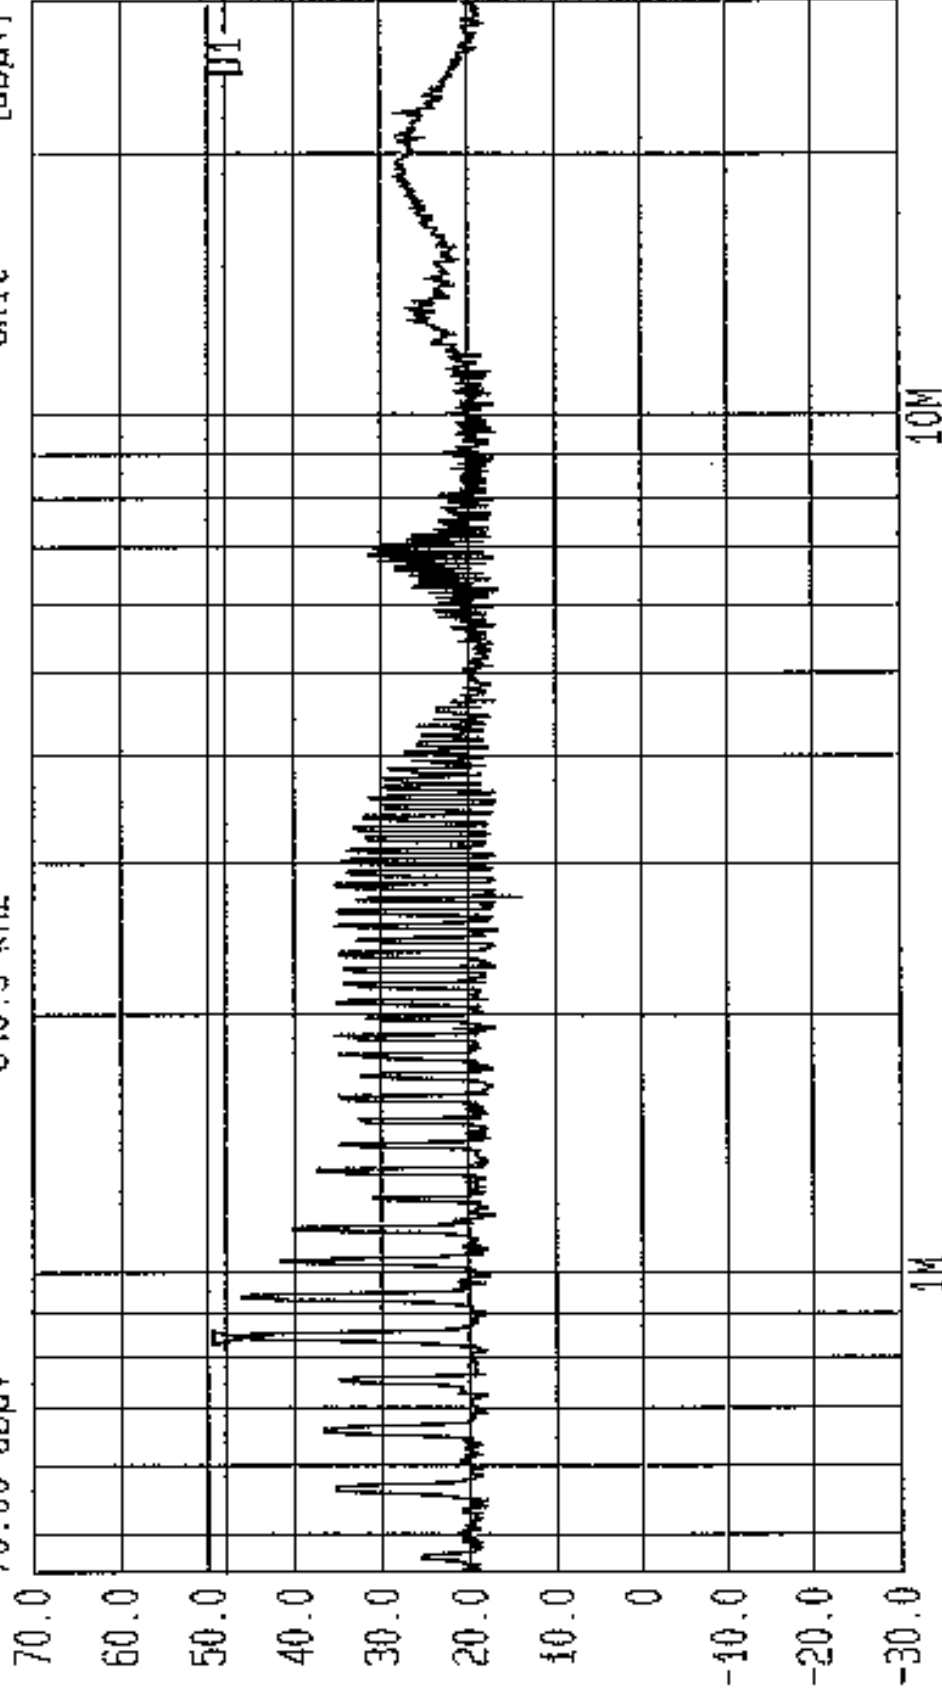


Start 450 kHz Stop 30 MHz
Span 29.55 MHz Sweep 2.2 s
Center 3.67423 MHz
Conducted. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit
Limit: FCC Part 15.407 (b(5)). Tx: 5.25-5.35GHz. Top Chan. Live GPH/38658/JD04/022



Date 30.Mar.'99 Time 11:09:55

Ref.Lvl 70.00 dBμV
Marker 46.06 dBμV
840.9 kHz

Res.Bw 9 kHz [imp]
16.Lvl off
CF.Stp 2.955 MHz
Vid.Bw 10 kHz
RF.Att 10 dB
Unit [dBμV]

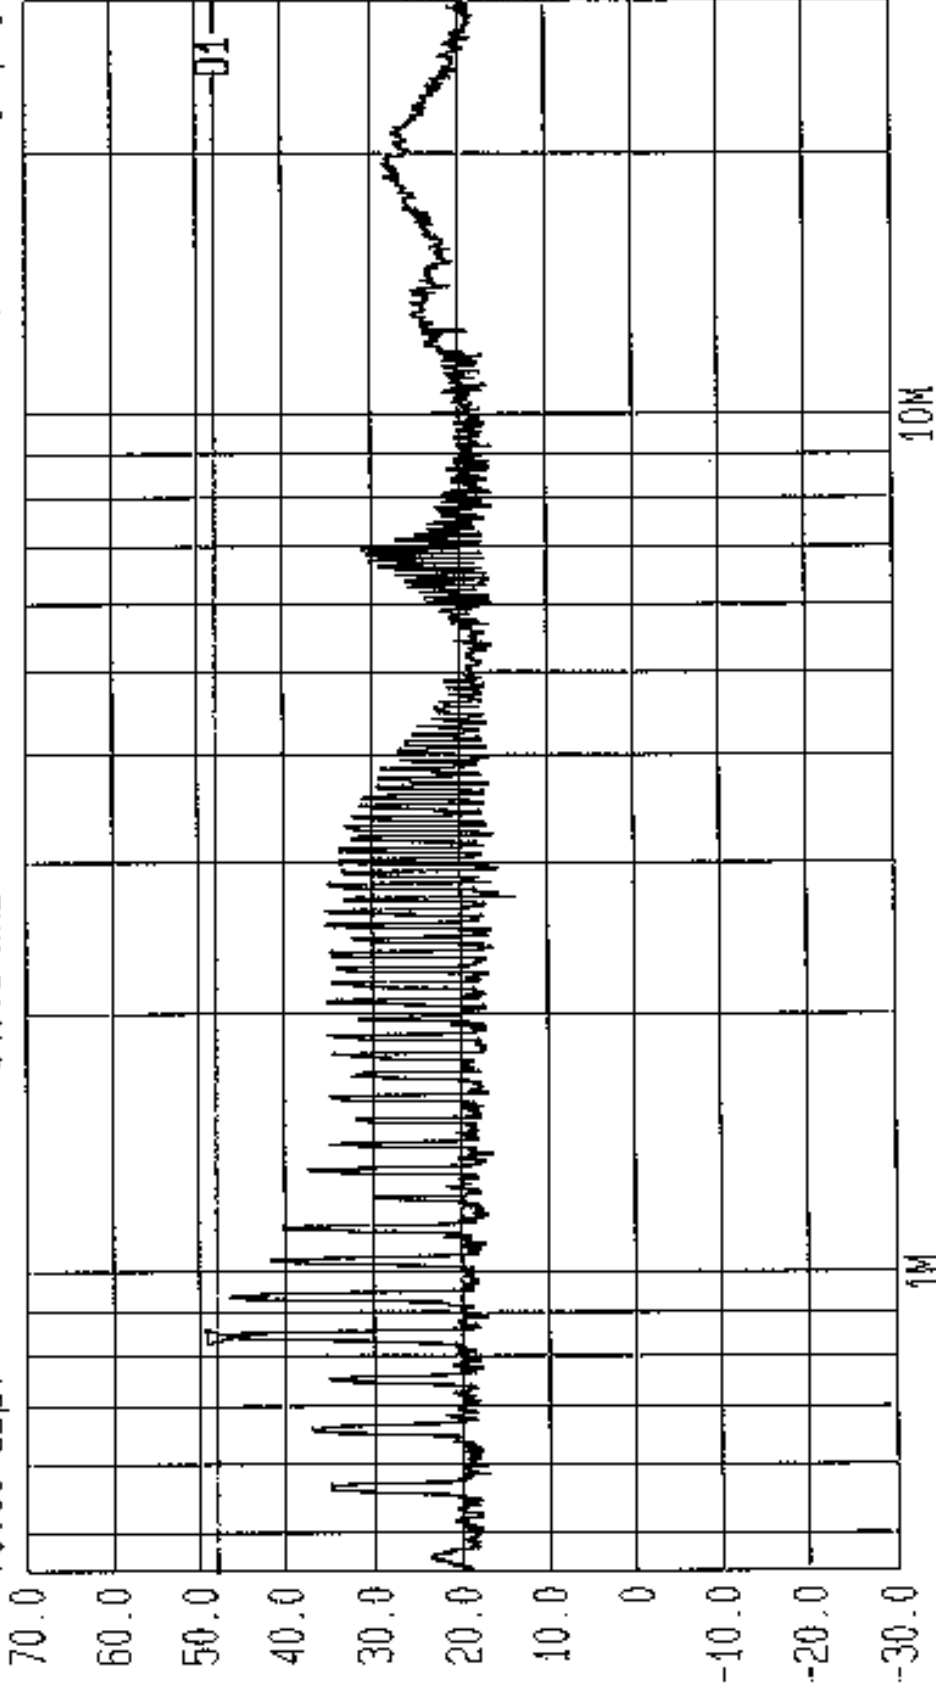

Start 450 kHz
Span 29.55 MHz
Center 3.67423 MHz
Sweep 2.2 s
Stop 30 MHz


Conducted. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit
Limit. FCC Part 15.407 (b (5)). Tx. 5.725-5.825GHz. Bot Chan. Live GPH/38658/JD04/023



Date 30.Mar.'99 Time 11:15:25

Ref.Lvl 70.00 dBμV
Marker 45.88 dBμV
840.9 kHz

Res.Bw 9 kHz [imp]
TG.Lvl Off
CF.Stp 2.955 MHz
Vid.Bw 10 kHz
RF.Att 10 dB
Unit [dBμV]

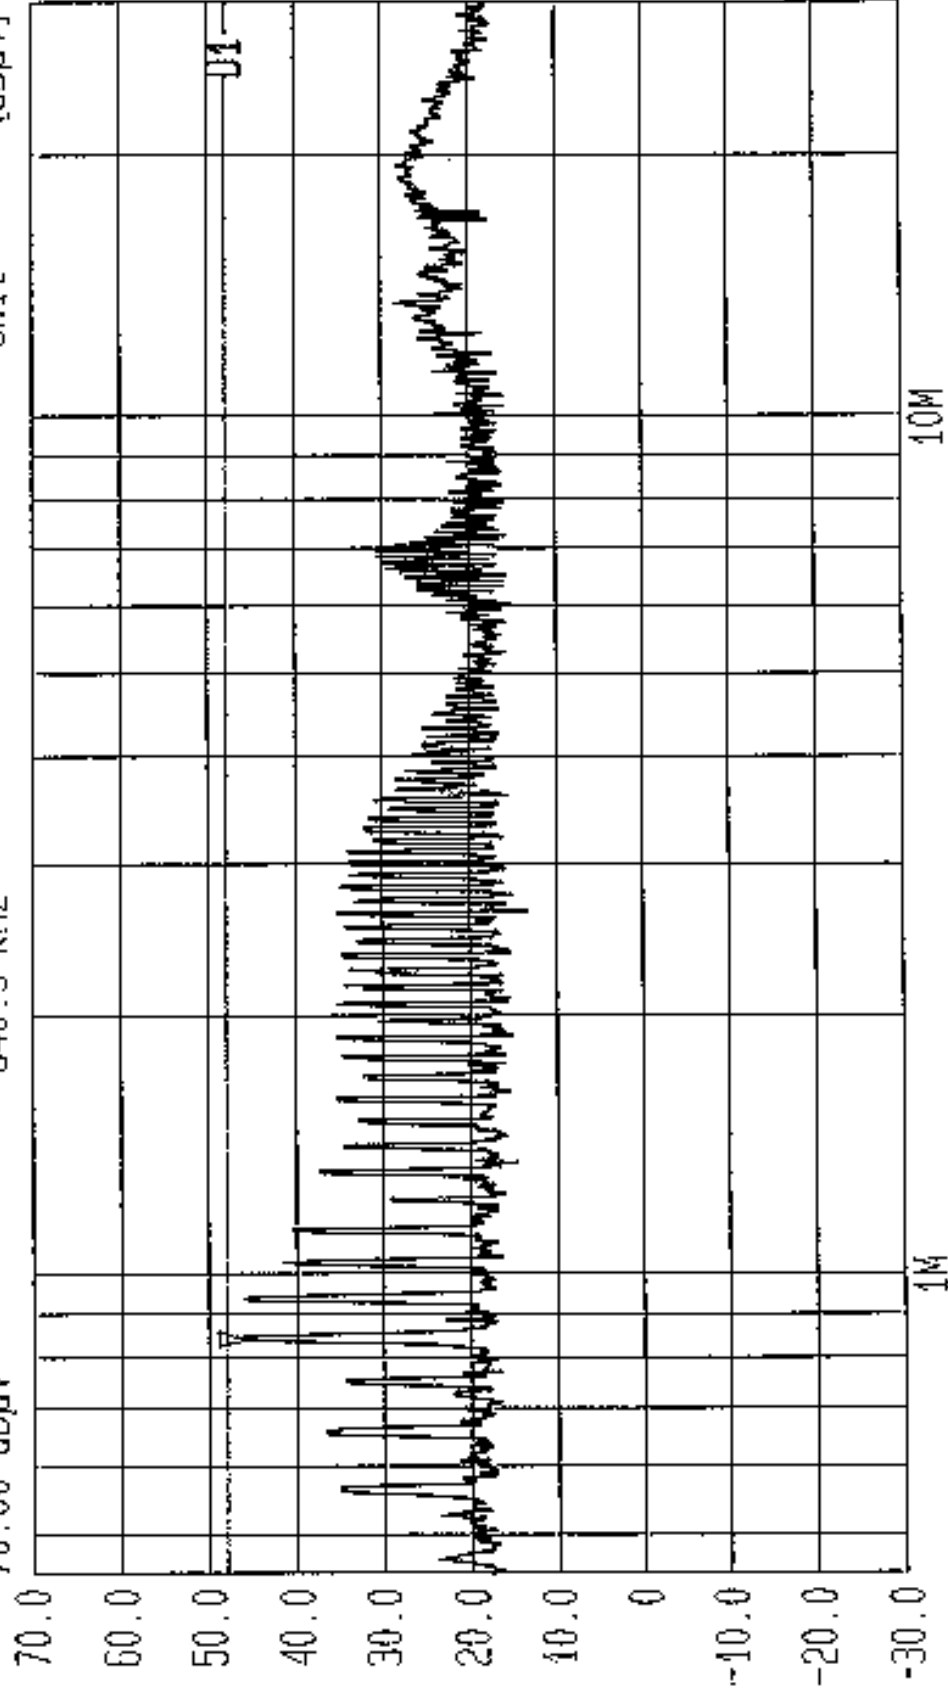

FI

Start 450 kHz
Span 29.55 MHz
Center 3.67423 MHz
Sweep 2.2 s
Stop 30 MHz


Conducted. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit
Limit. FCC Part 15.407 (b(5)). Tx. 5.725-5.825GHz. Top Chan. Live GPH/38658/JD04/024



Date 30.Mar.'99 Time 11:20:52

Ref.Lvl 70.00 dBμV
Marker 45.70 dBμV
B40.9 kHz

Res.BW 9 kHz [imp]
TG.Lvl off
CF.Stp 2.955 MHz
Vid.BW 10 kHz
RF.Att 10 dB
Unit [dBμV]

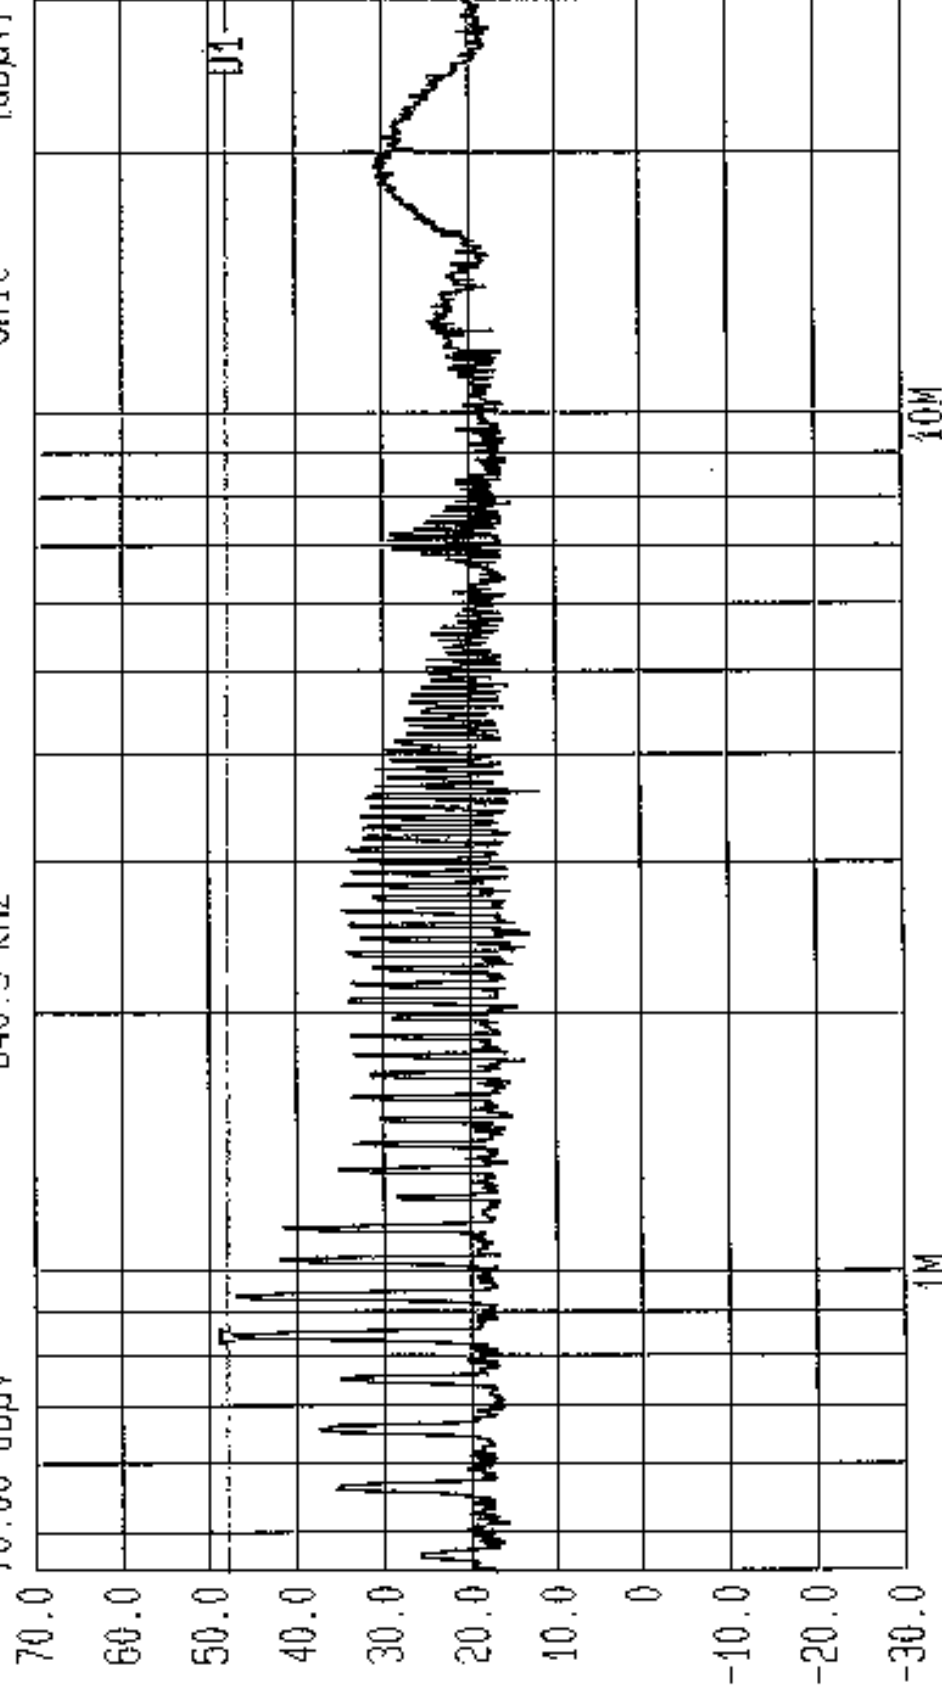

Start 450 kHz
Span 29.55 MHz
Center 3.67423 MHz
Sweep 260 ms
Stop 30 MHz


Conducted. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit
Limit. FCC Part 15.407 (b (5) . Rx. 5.15-5.256Hz. Bot Chan. Neutral GPH/38658/JD04/025



Date 30.Mar.'99 Time 11:55:47

Ref.Lvl 70.00 dBμV
Marker 47.99 dBμV
936.2 kHz

Res.Bw 9 kHz [imp]
T6.Lvl Off
CF.Stp 2.955 MHz
Vid.Bw 10 kHz
RF.Att 10 dB
Unit [dBμV]

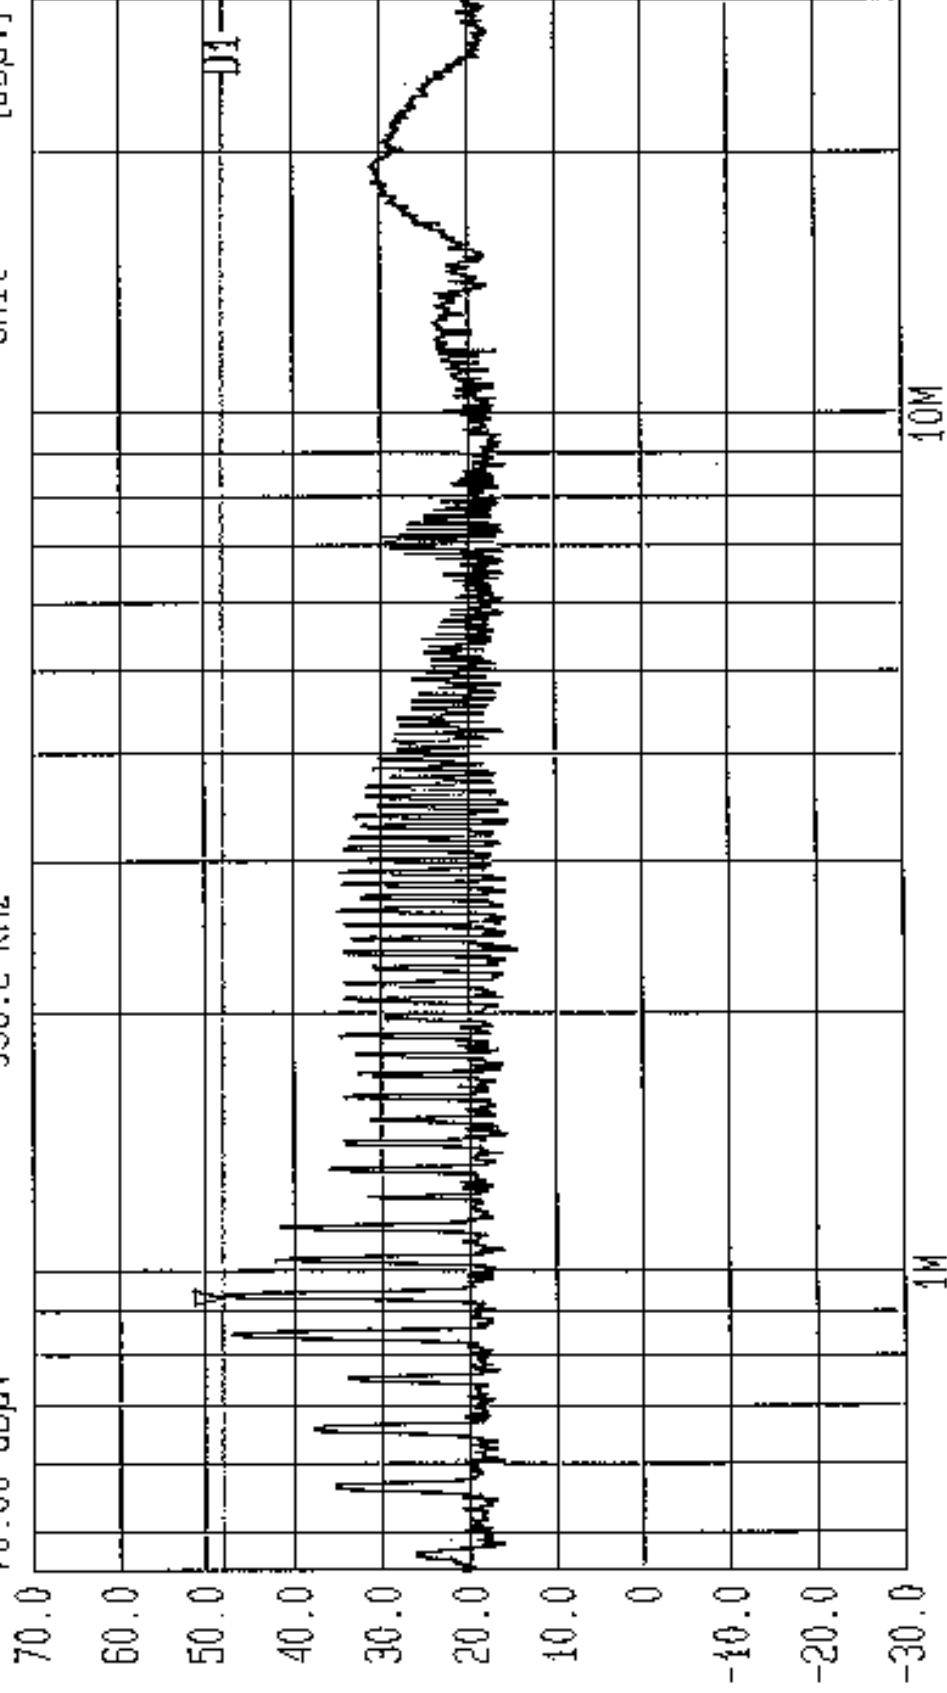


Start 450 kHz Stop 30 MHz
Span 29.55 MHz Sweep 2.2 s
Center 3.67423 MHz
Conducted, Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit
Limit.FCC Part 15.407 (b)(5). Rx 5.15-5.25GHz. Top Chan. Neutral GPH/38658/JD04/026



Date 26.Mar.'99 Time 19:30:55
Ref.Lvl 70.00 dBx
Marker 46.82 dBx
1.9733 GHz

Res.BW 1 MHz [imp]
T6.Lvl Off
CF.Stp 100.000 MHz
Vid.Bw 1 MHz
HF.Att 0 dB
Unit [dBμV/m]

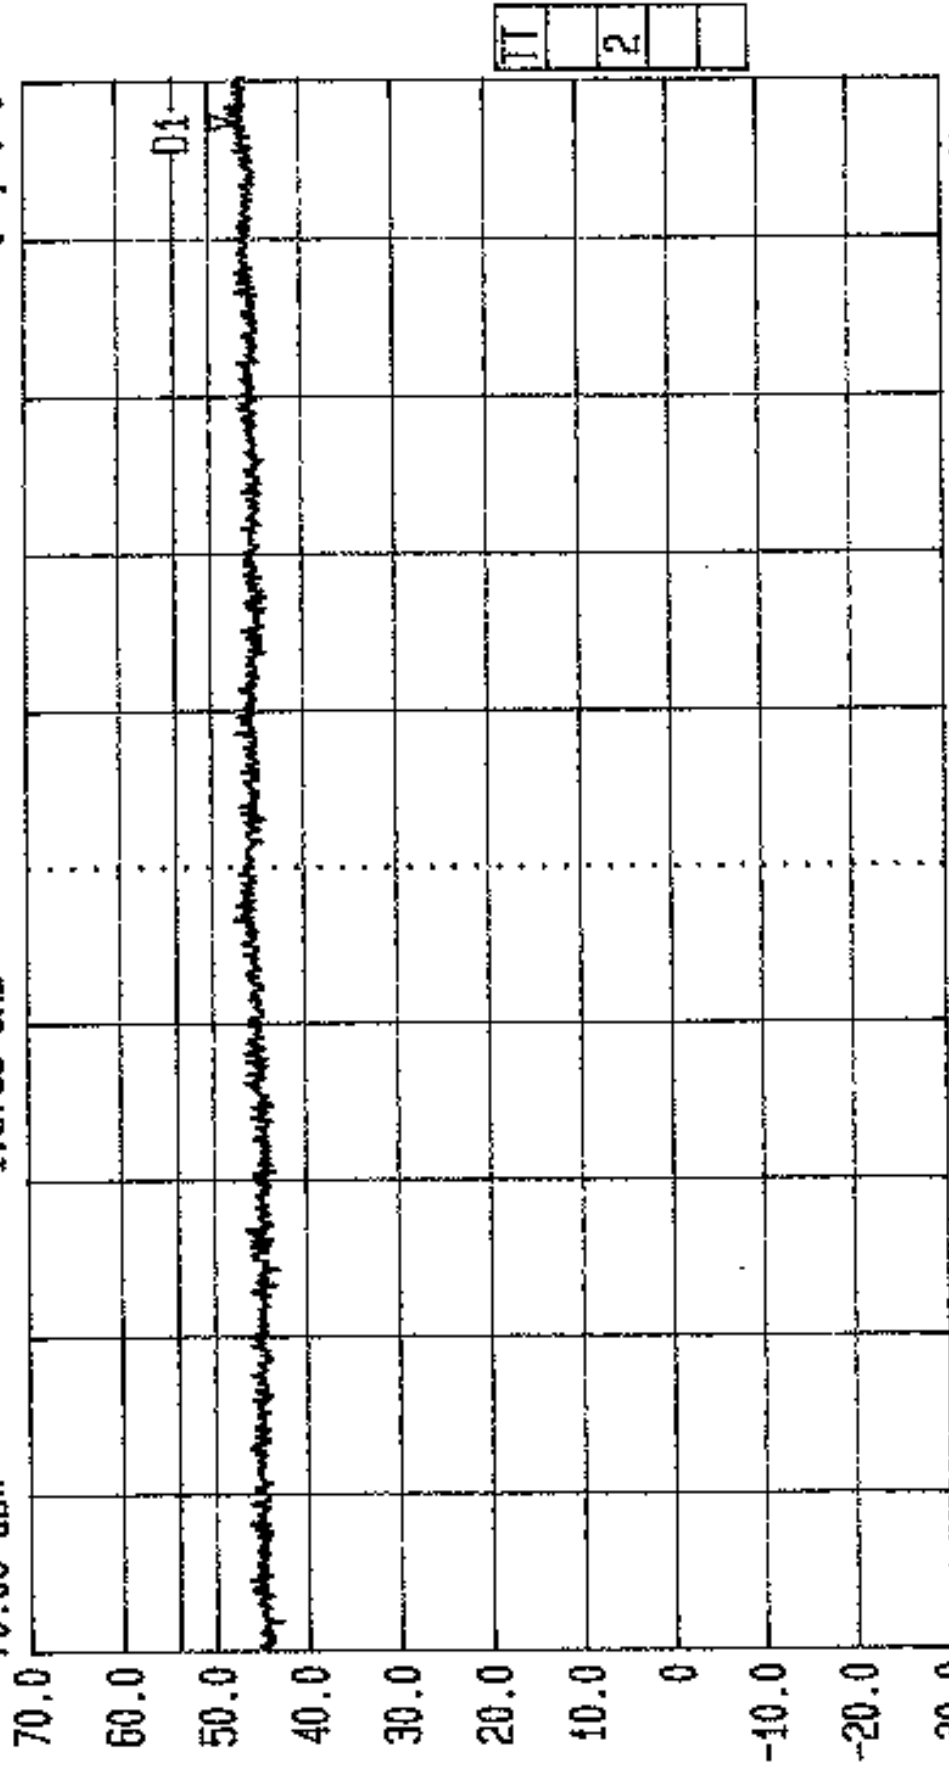

Radiated. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit.
Limit. FCC Part 15.405 (b) Rx Mode. 5.15-5.25 GHz Band Bott Chan. GPH/38658/JD04/027



Date 26.Mar.'99 Time 19:36:20
Ref.Lvl 70.00 dB* Marker 47.46 dB*
1.4477 GHz

Res.BW 1 MHz [imp]
1 MHz [imp] Off
100.000 MHz
HF.Att 0 dB
Unit [dBuV/m]

70.0

60.0

50.0

40.0

30.0

20.0


10.0

0

-10.0

-20.0

-30.0

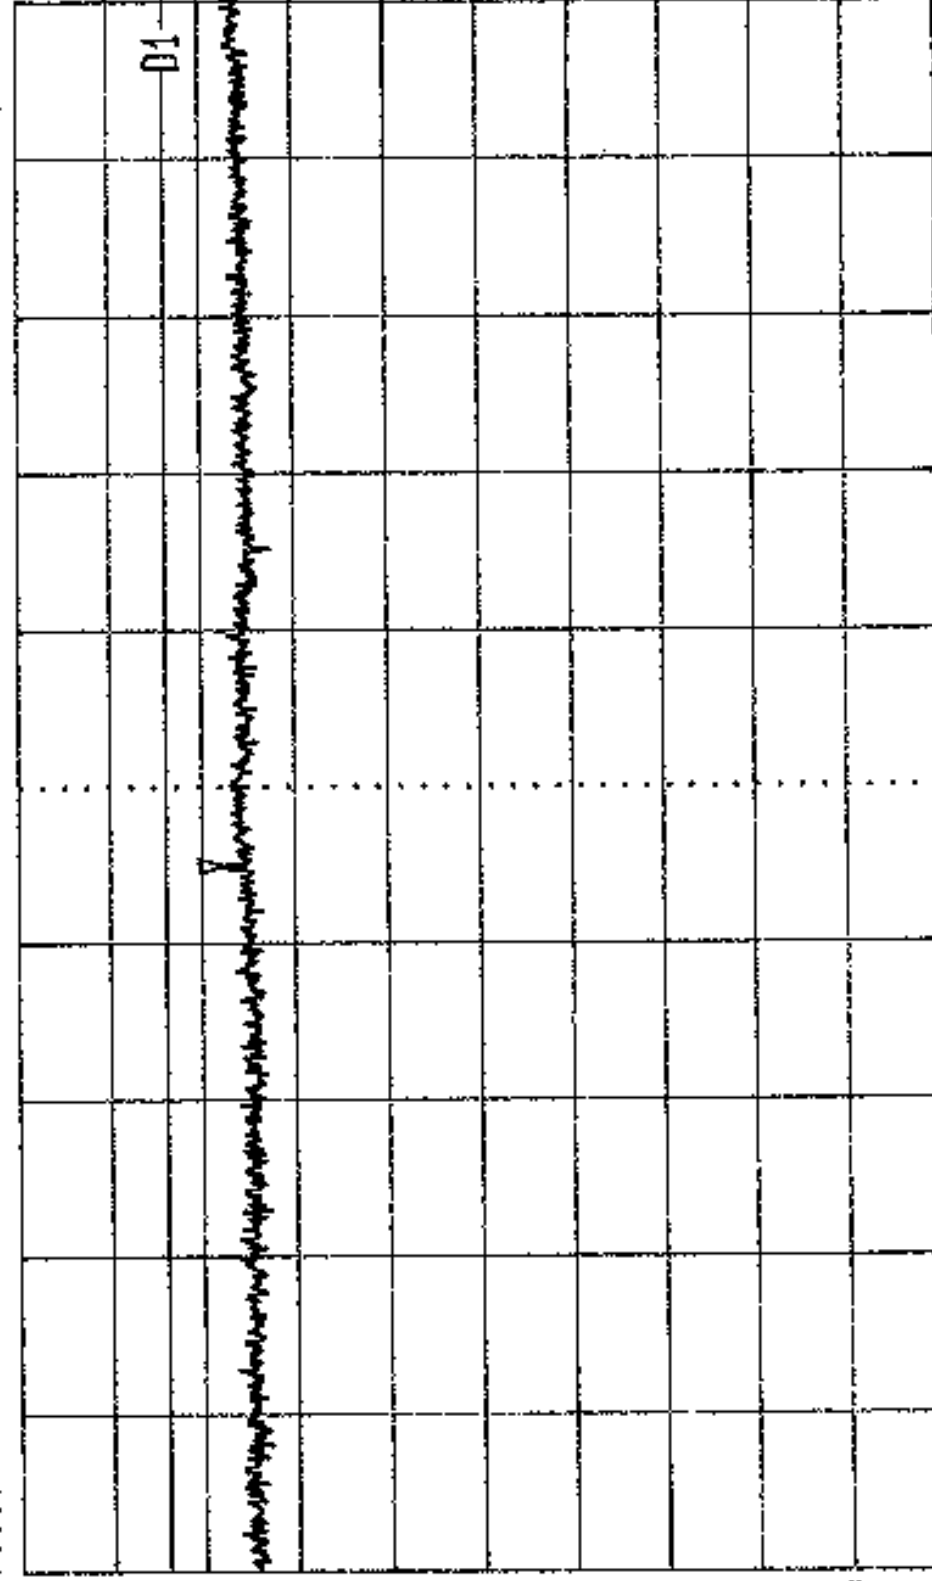

Start 1 GHz
Span 1 GHz
Center 1.5 GHz
Sweep 20 ms
Stop 2 GHz


Radiated, Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit.
Limit: FCC Part 15.405 (b) Rx Mode. 5.15-5.25 GHz Band Top Chan. GPH/38658/JD04/02B

11
2



Date 26.Mar.'99 Time 19:42:29
Ref.Lvl 70.00 dBx
Marker 47.53 dBx
1.9800 GHz

Res.Bw 1 MHz [imp]
TG.Lvl Off
CF.Stp 100.000 MHz
Vid.Bw 1 MHz
RF.Att 0 dB
Unit [dBuV/m]

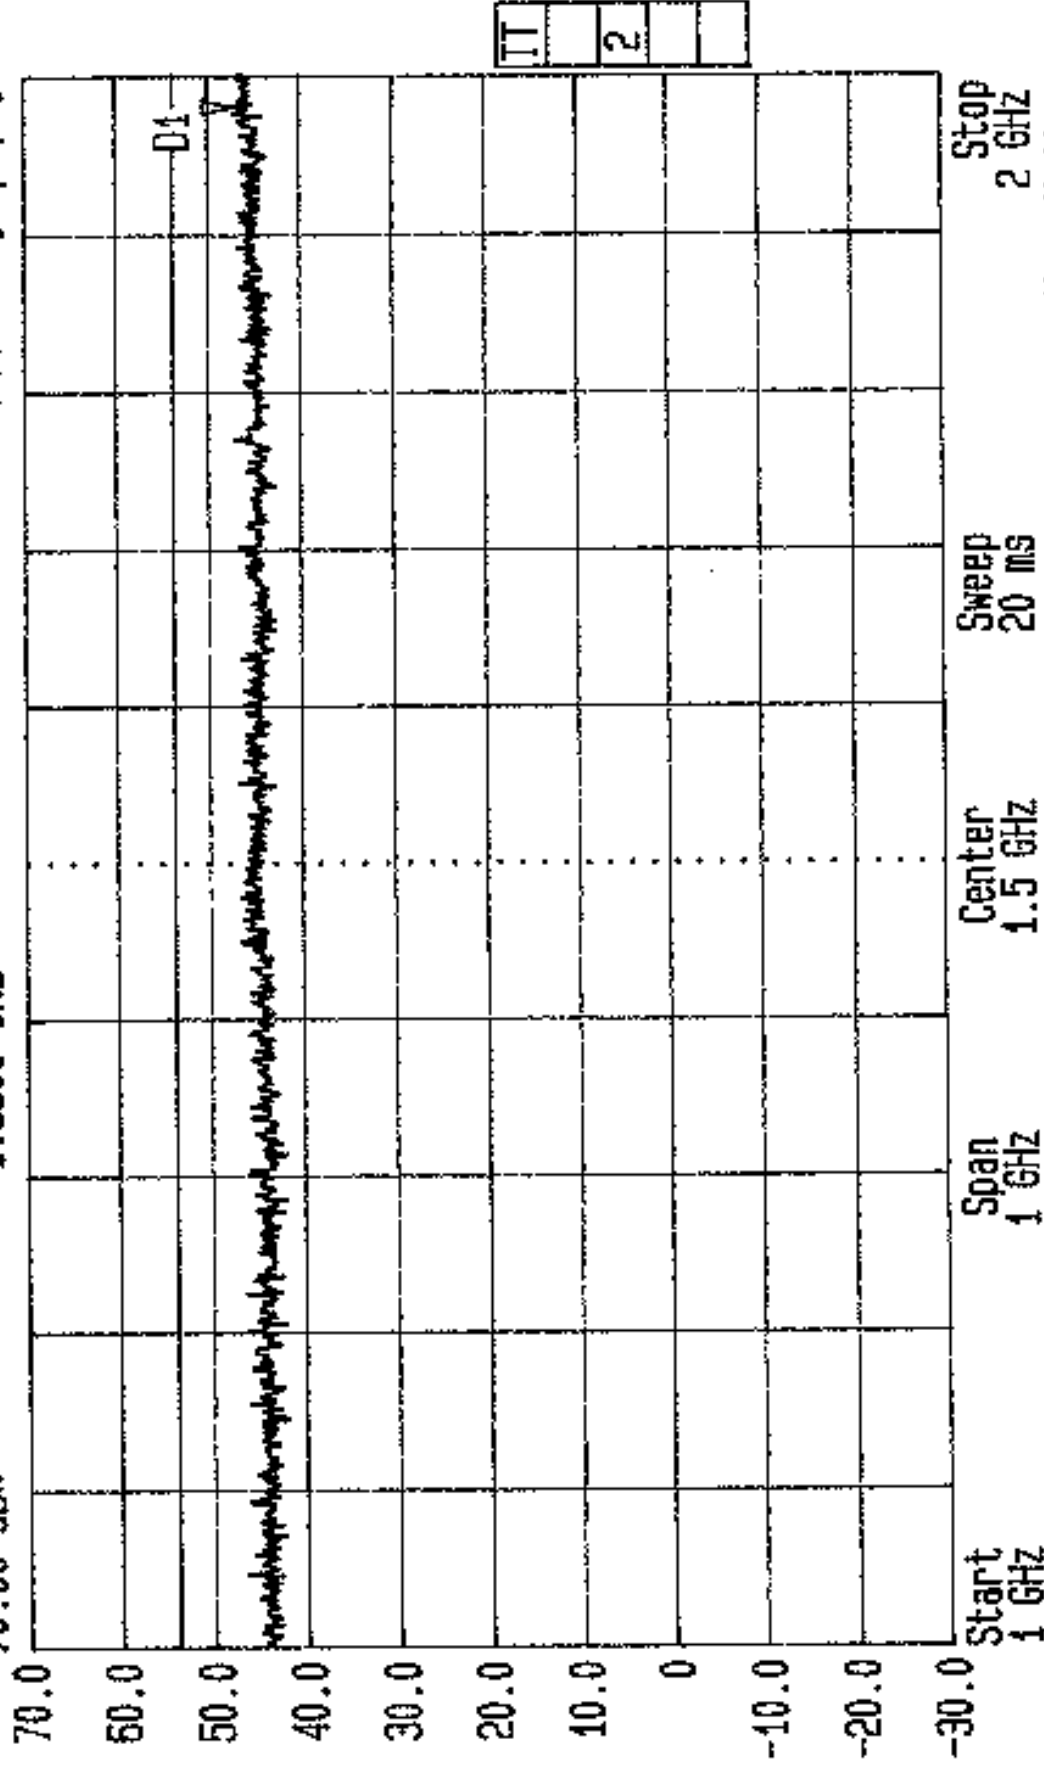

Radiated. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit.
Limit. FCC Part 15.405 (b) Rx Mode. 5.25-5.35 GHz Band Bott Chan. GPH/38658/J004/029



Date 26.Mar.'99 Time 19:47:43

Ref.Lvl
70.00 dB*


Marker
46.06 dB*

1.8411 GHz

Res.Bw
TG.Lvl
CF.Stp

1 MHz [imp]
Off
100.000 MHz

Vid.Bw
RF.Att
Unit
1 MHz
0 dB
[dBuV/m]

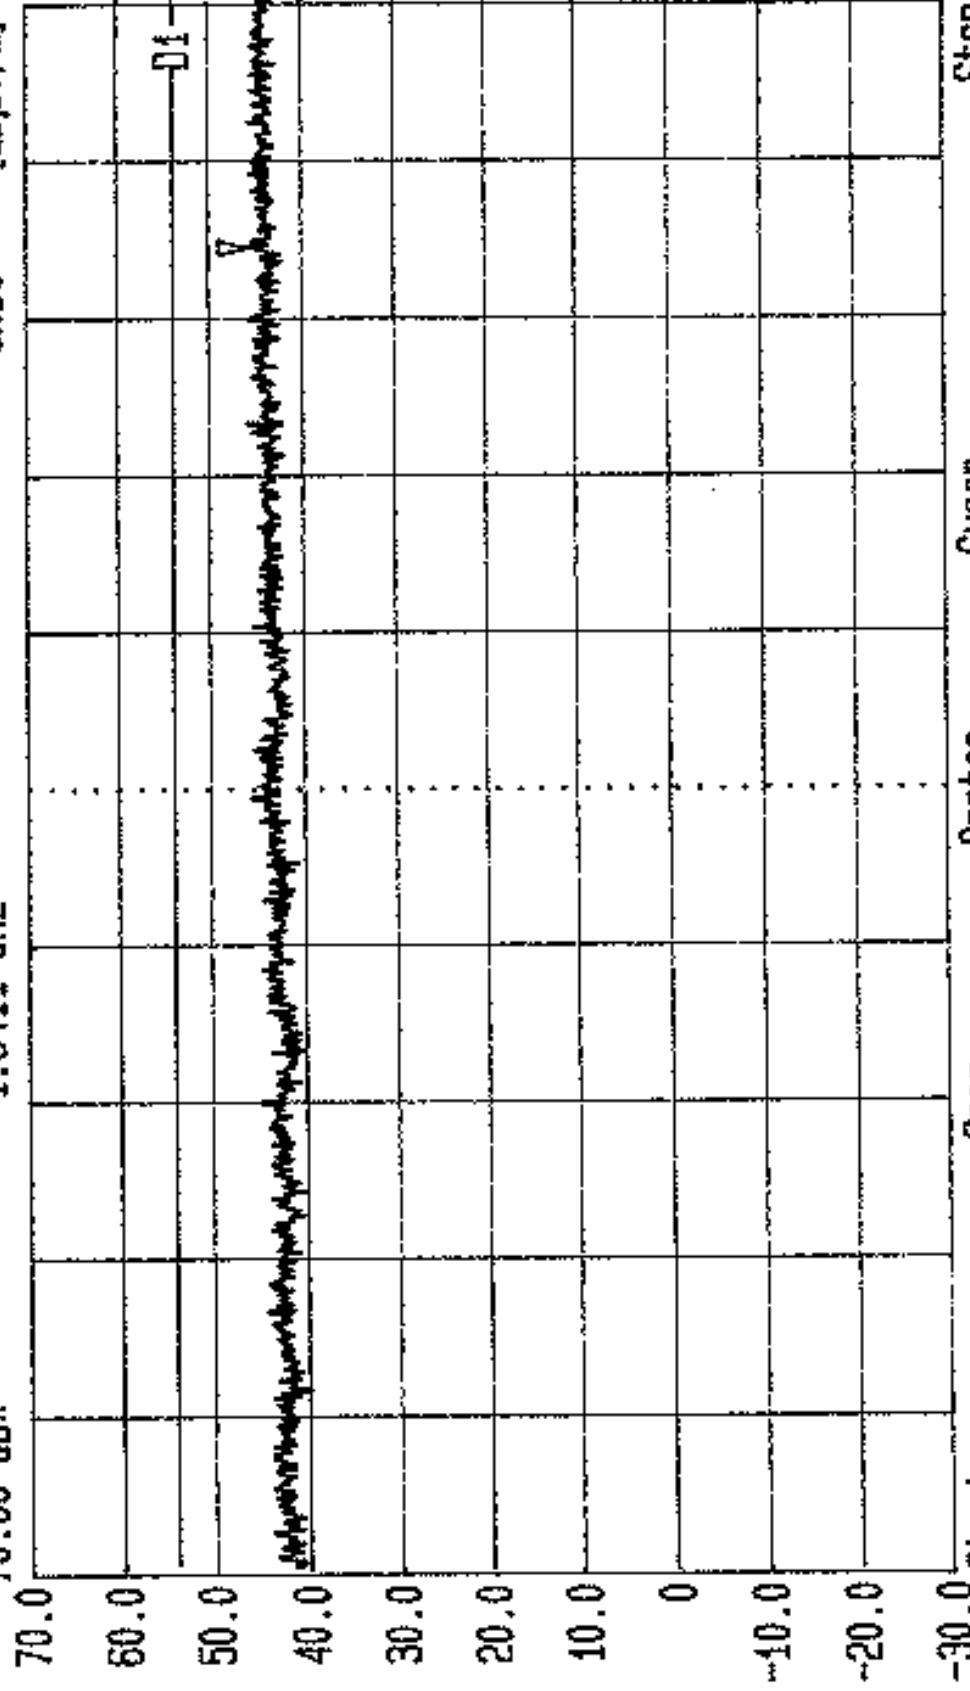


TT
2
PA
10

Radiated. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit.
Limit. FCC Part 15.405 (b) Rx Mode. 5.25-5.35 GHz Band Top Chan. 6PH/38658/JD04/030



Date 26.Mar.'99 Time 19:53:10
Ref.Lvl 70.00 dB*
Marker 46.92 dB*
1.9977 GHz

Res.Bw 1 MHz [imp]
100.000 MHz
CF.Stp off
Vid.Bw 1 MHz
RF.Att 0 dB
Unit [dBuV/m]

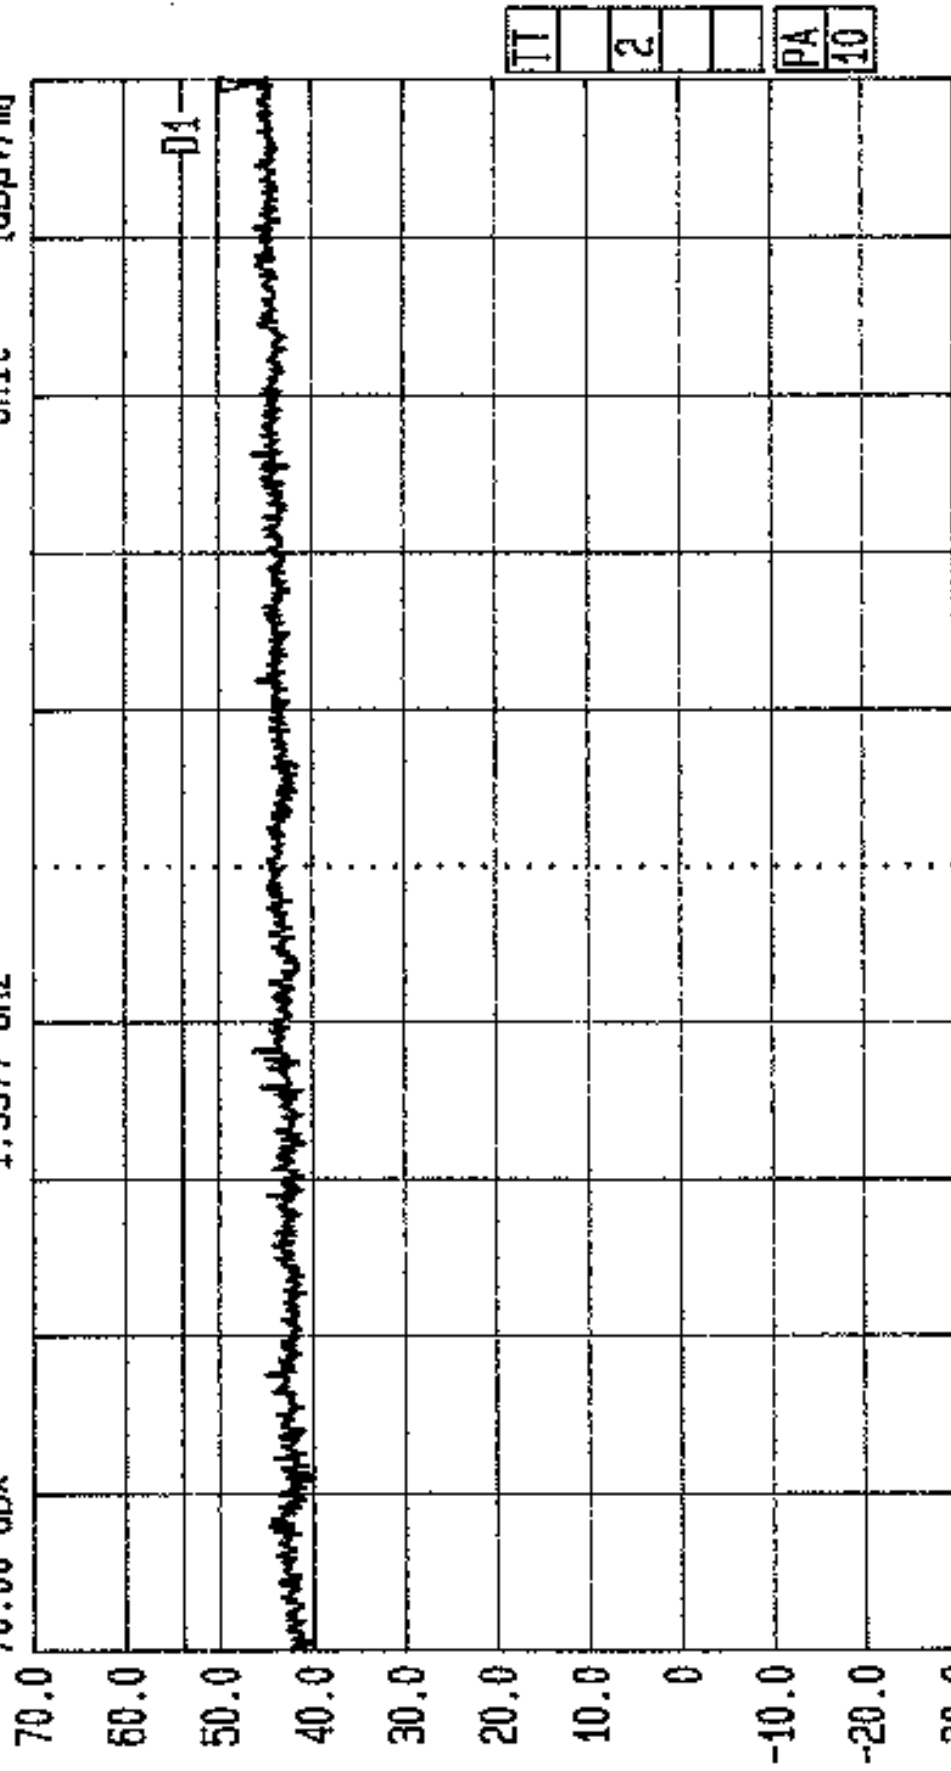


Radiated. Tested by HFI for Adaptive Broadband Ltd., EUT: AB Access Subscriber Unit.
Limit. FCC Part 15.405 (b) Rx Mode. 5.725-5.825GHz Band Bott Chan GPH/38658/JD04/031



Date 26.Mar.'99 Time 19:58:30
Ref.Lvl 70.00 dB*
Marker 46.69 dB*
1.2022 GHz

Res.Bw 1 MHz [imp]
TG.Lvl Off
CF.Stp 100.000 MHz
Vid.Bw 1 MHz
RF.Att 0 dB
Unit [dBμV/m]

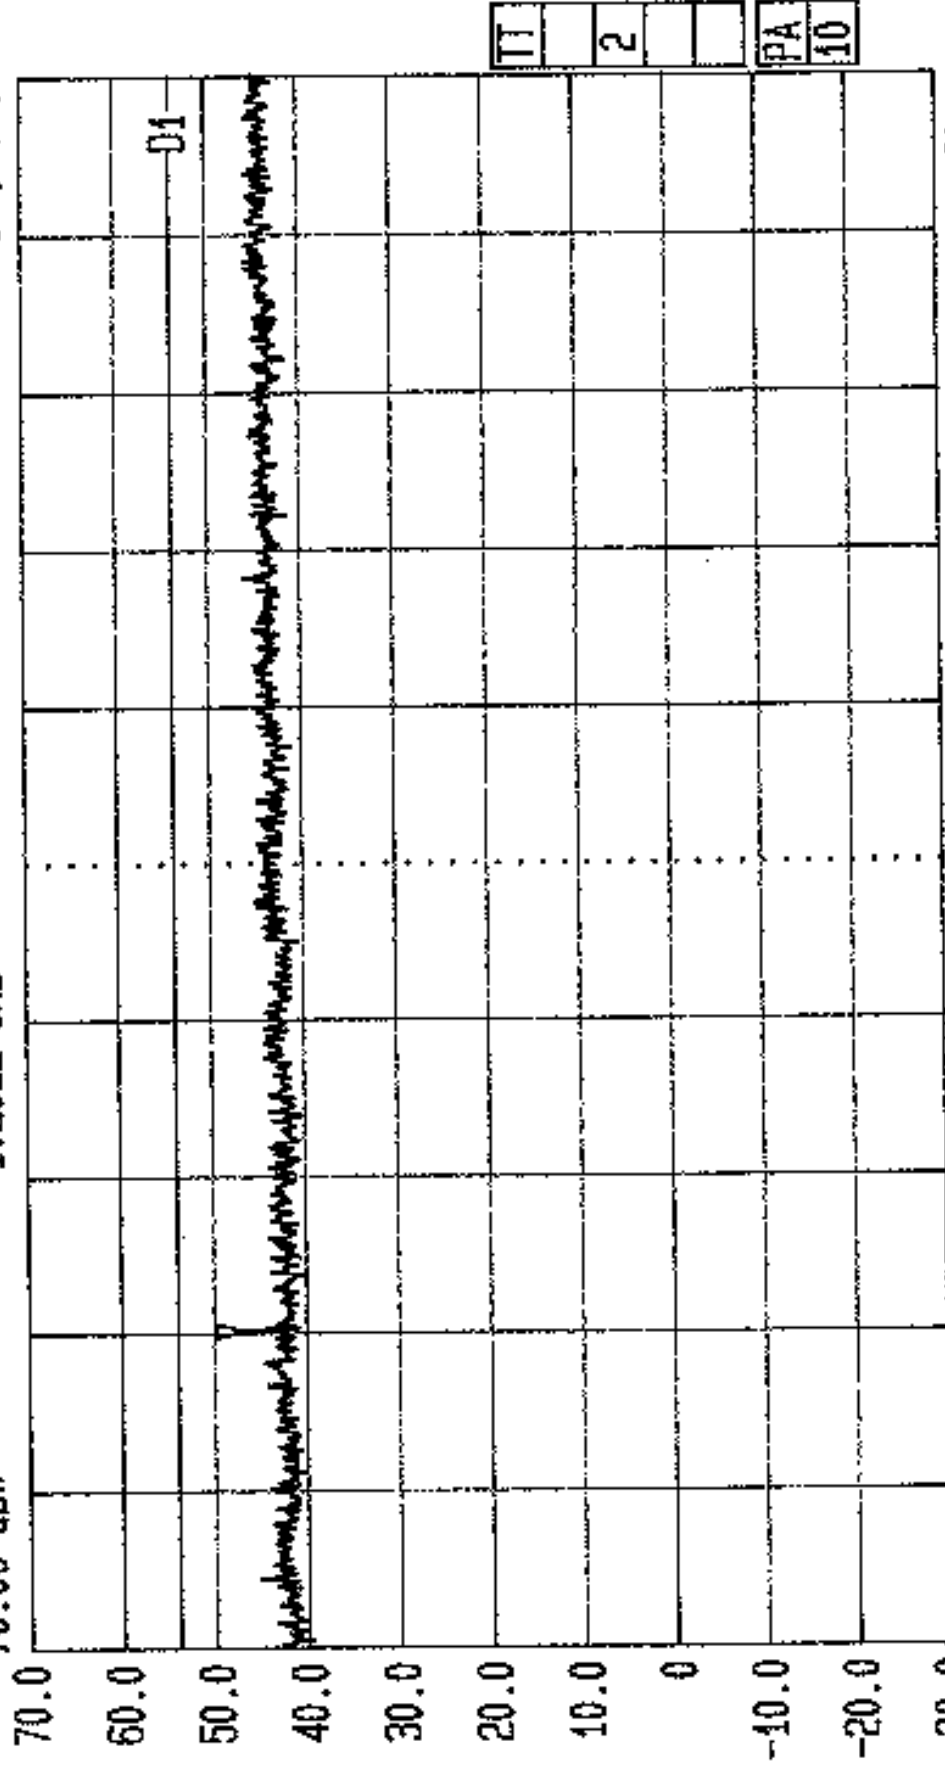


Start 1 GHz Stop 2 GHz
Span 1 GHz Sweep 20 ms
Center 1.5 GHz
Radiated. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit.
Limit. FCC Part 15.405 (b) Rx Mode. 5.725-5.825GHz Band Top Chan 6PH/38658/JD04/032



Date 26.Mar.'99 Time 20:06:37
Ref.Lvl 70.00 dBx
Marker 48.88 dBx
2.3266 GHz

Res.BW 1 MHz [imp]
TG.Lvl off
CF.Stp 200.000 MHz
Vid.BW 1 MHz
RF.Att 0 dB
Unit [dBuV/m]

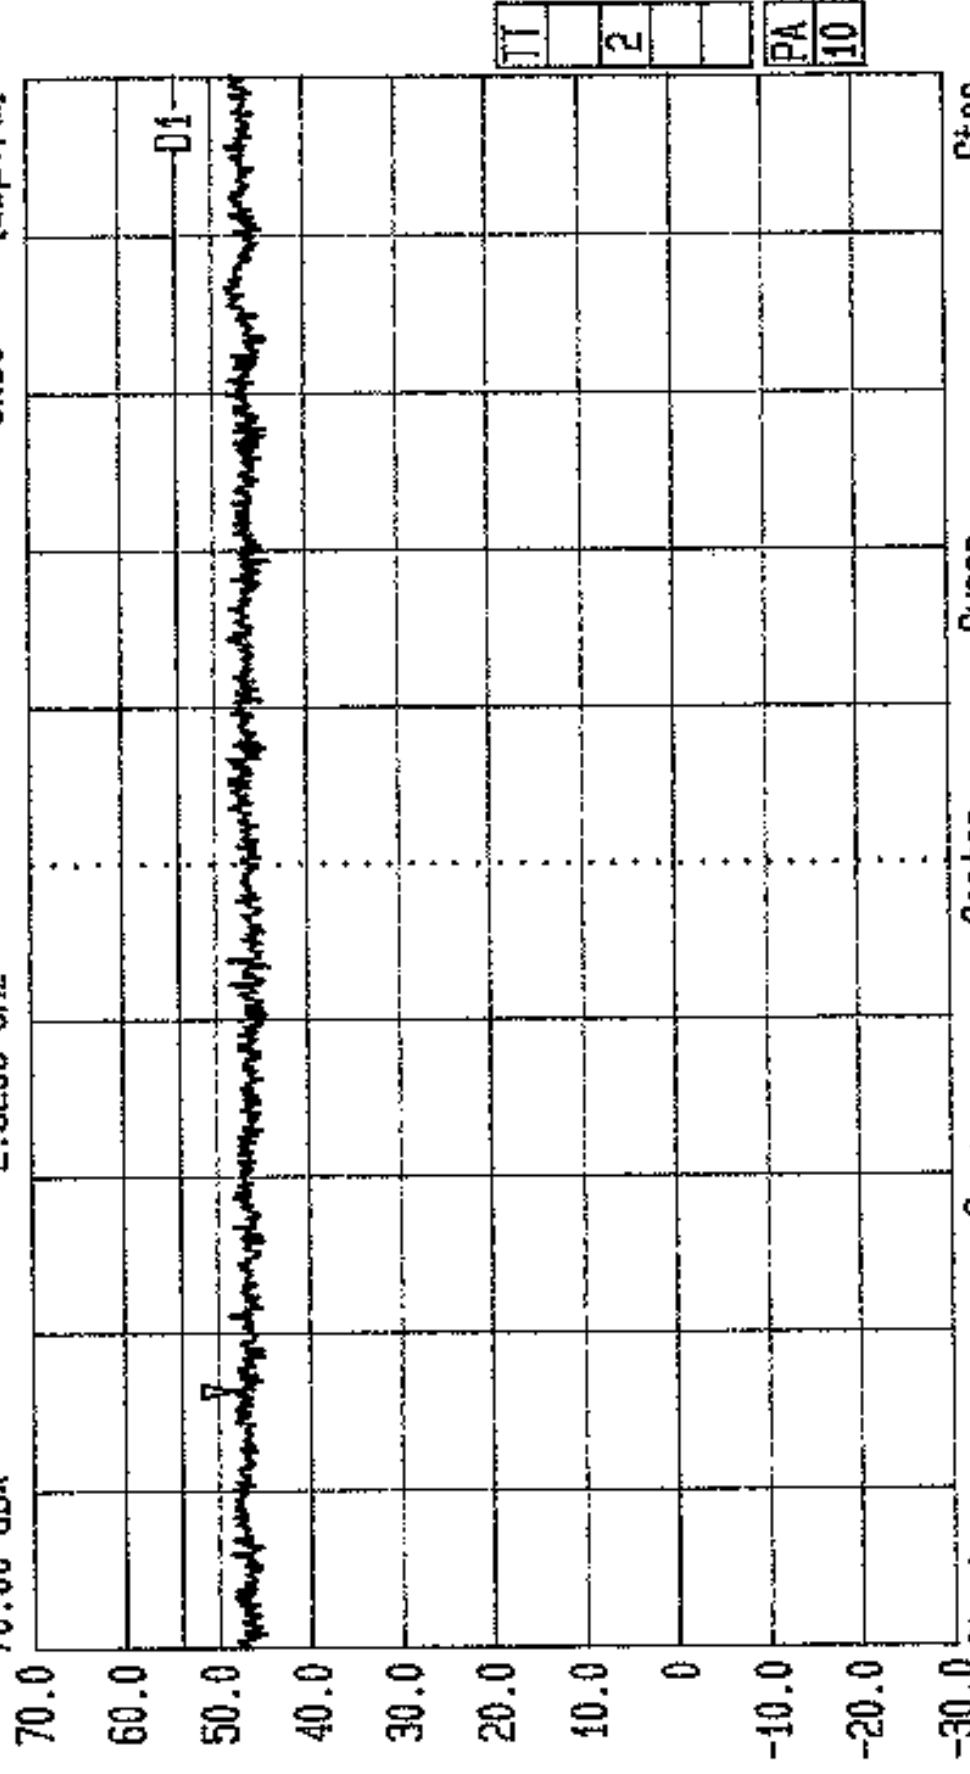


Radiated, Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit.
Limit. FCC Part 15.405 (b) Rx Mode. 5.15-5.25 GHz Band Bott Chan GPH/38658/JD04/033



Date 26.Mar.'99 Time 20:12:15
Ref.Lvl 70.00 dBx
Marker 49.41 dBx
2.1688 GHz

Res.Bw 1 MHz [imp]
TG.Lvl Off
CF.Stp 200.000 MHz
Vid.Bw 1 MHz
RF.Att 0 dB
Unit [dBuV/m]

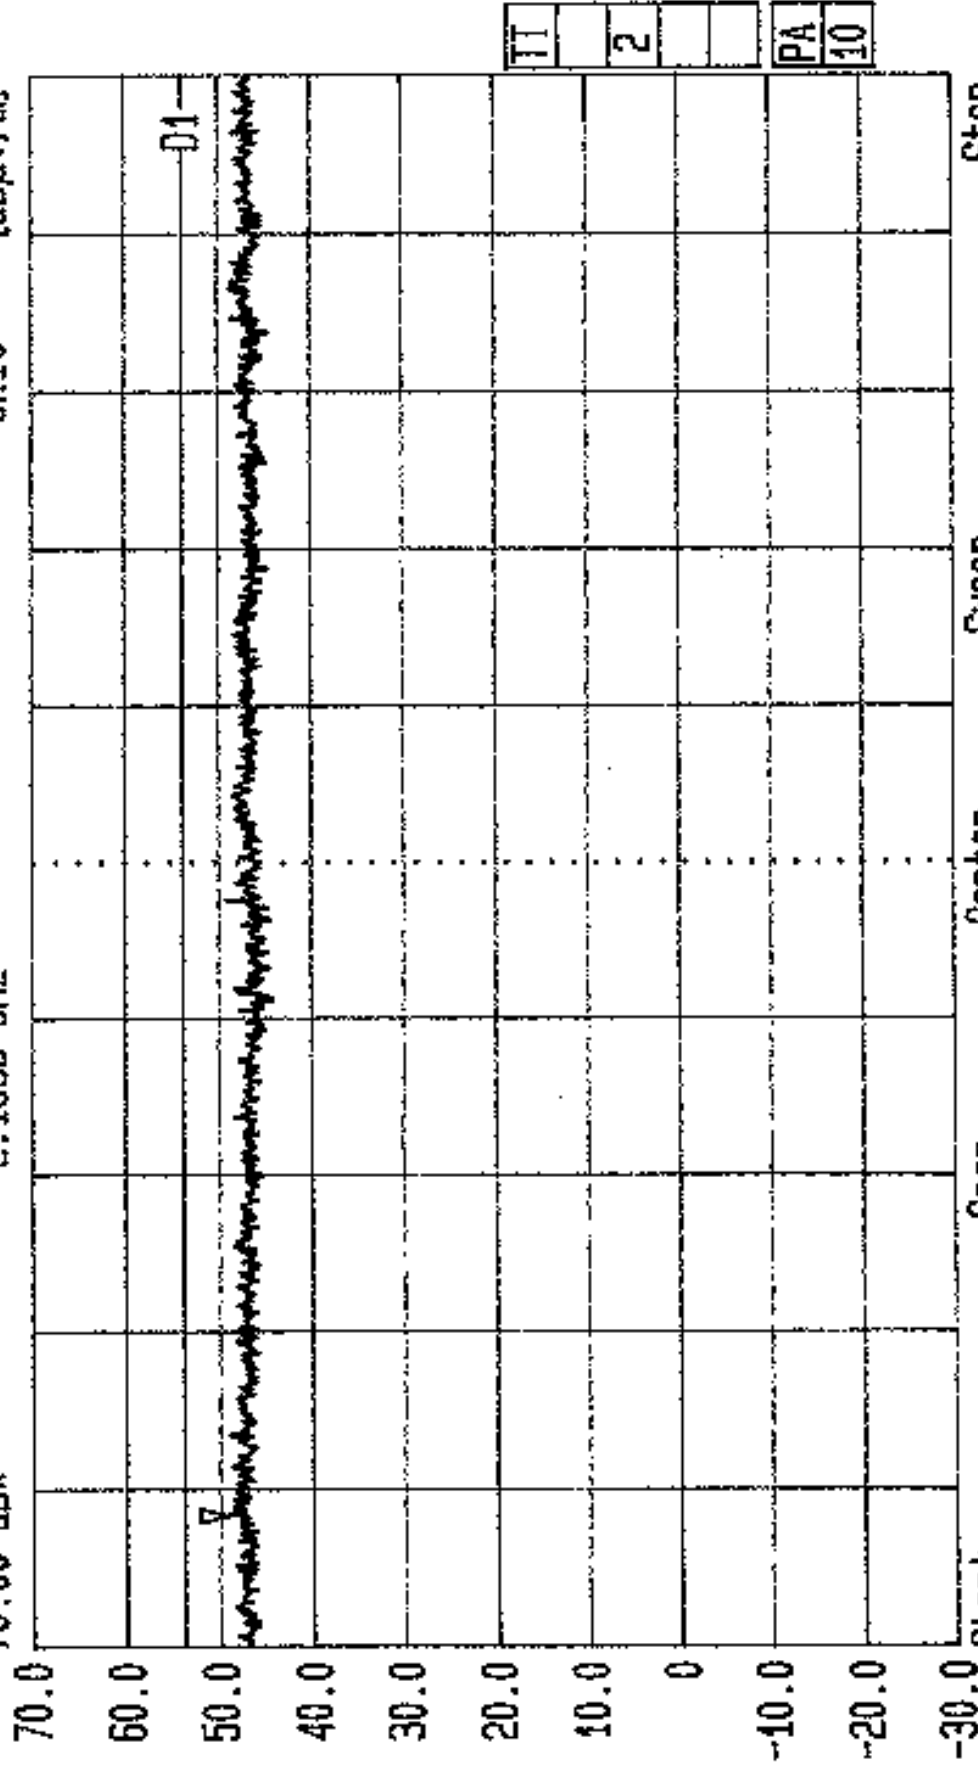


Radiated, Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit.
Limit. FCC Part 15.405 (b) Rx Mode, 5.15-5.25 GHz Band Top Chan 6PH/38658/JD04/034



Date 26.Mar.'99 Time 20:17:25
Ref.Lvl 70.00 dB* Marker 49.08 dB*
3.0777 GHz

Res.BW 1 MHz [imp] Vid.BW 1 MHz
T6.Lvl1 Off
CF.Stp 200.000 MHz
RF.Att 0 dB
Unit [dBμV/m]

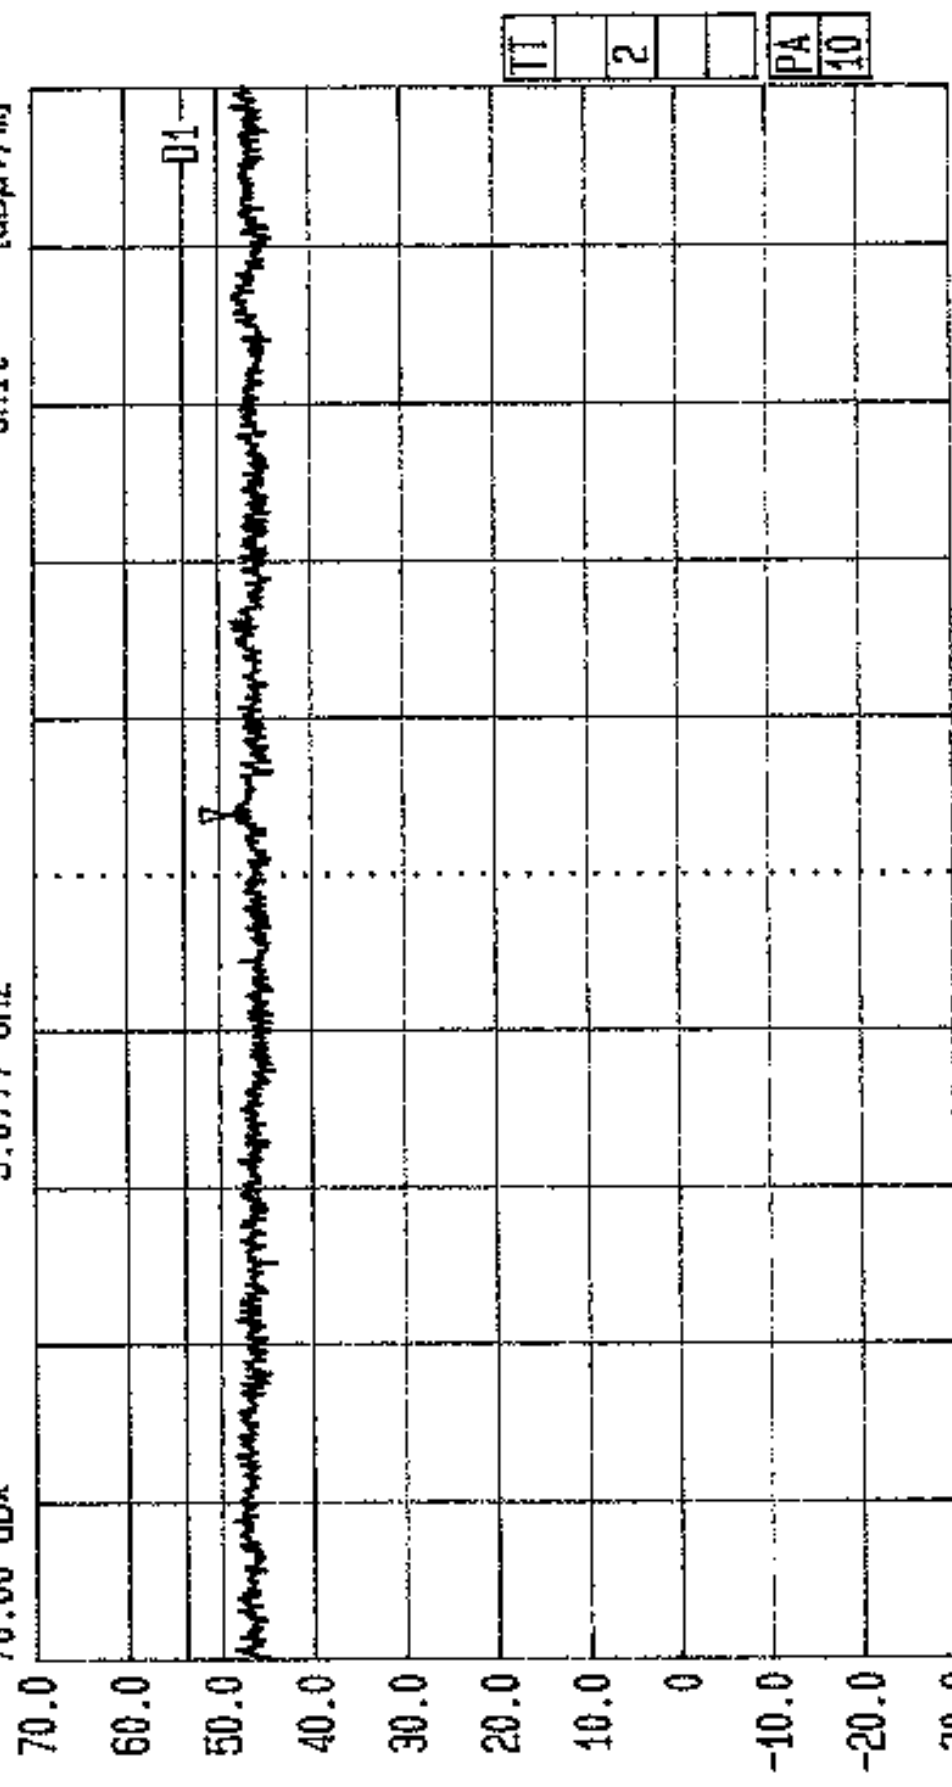

Radiated. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit.
Limit. FCC Part 15.405 (b) Rx Mode. 5.25-5.35 GHz Band Bott Chan 6PH/38658/J004/035



Date 26.Mar.'99 Time 20:22:35

Ref.Lvl 70.00 dBx

Marker 48.93 dBx

2.1800 GHz

1 MHz

Vid.Bw

1 MHz [imp]

Res.Bw


Off

200.000 MHz

RF.Att

0 dB

[dBuV/m]

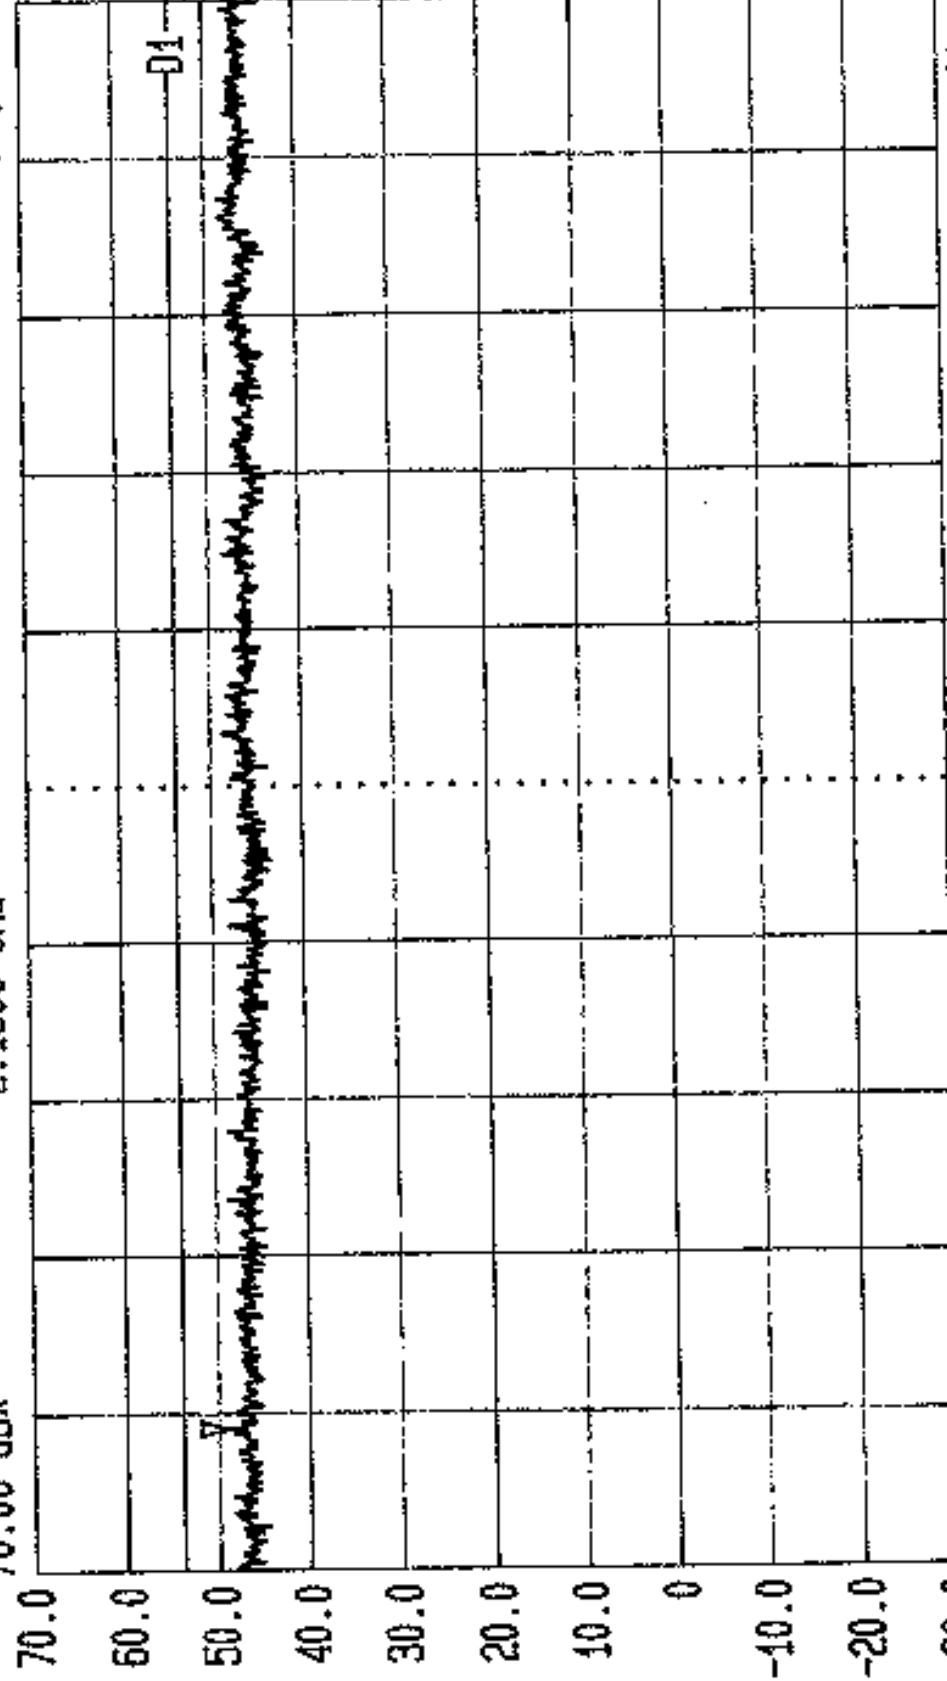

Start 2 GHz

Span 2 GHz

Center 3 GHz

Sweep 20 ms

Stop 4 GHz


TT 2 PA 10

Radiated, Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit.
Limit. FCC Part 15.405 (b) Rx Mode. 5.25-5.35 GHz Band Top Chan 6PH/38658/JD04/036



Date 26.Mar.'99 Time 20:27:52
Ref.Lvl 70.00 dB* Marker 49.33 dB*
3.6155 GHz

Res.Bw 1 MHz [imp] Vid.Bw 1 MHz
TG.Lvl Off RF.Att 0 dB
CF.Stp 200.000 MHz Unit [dBμV/m]

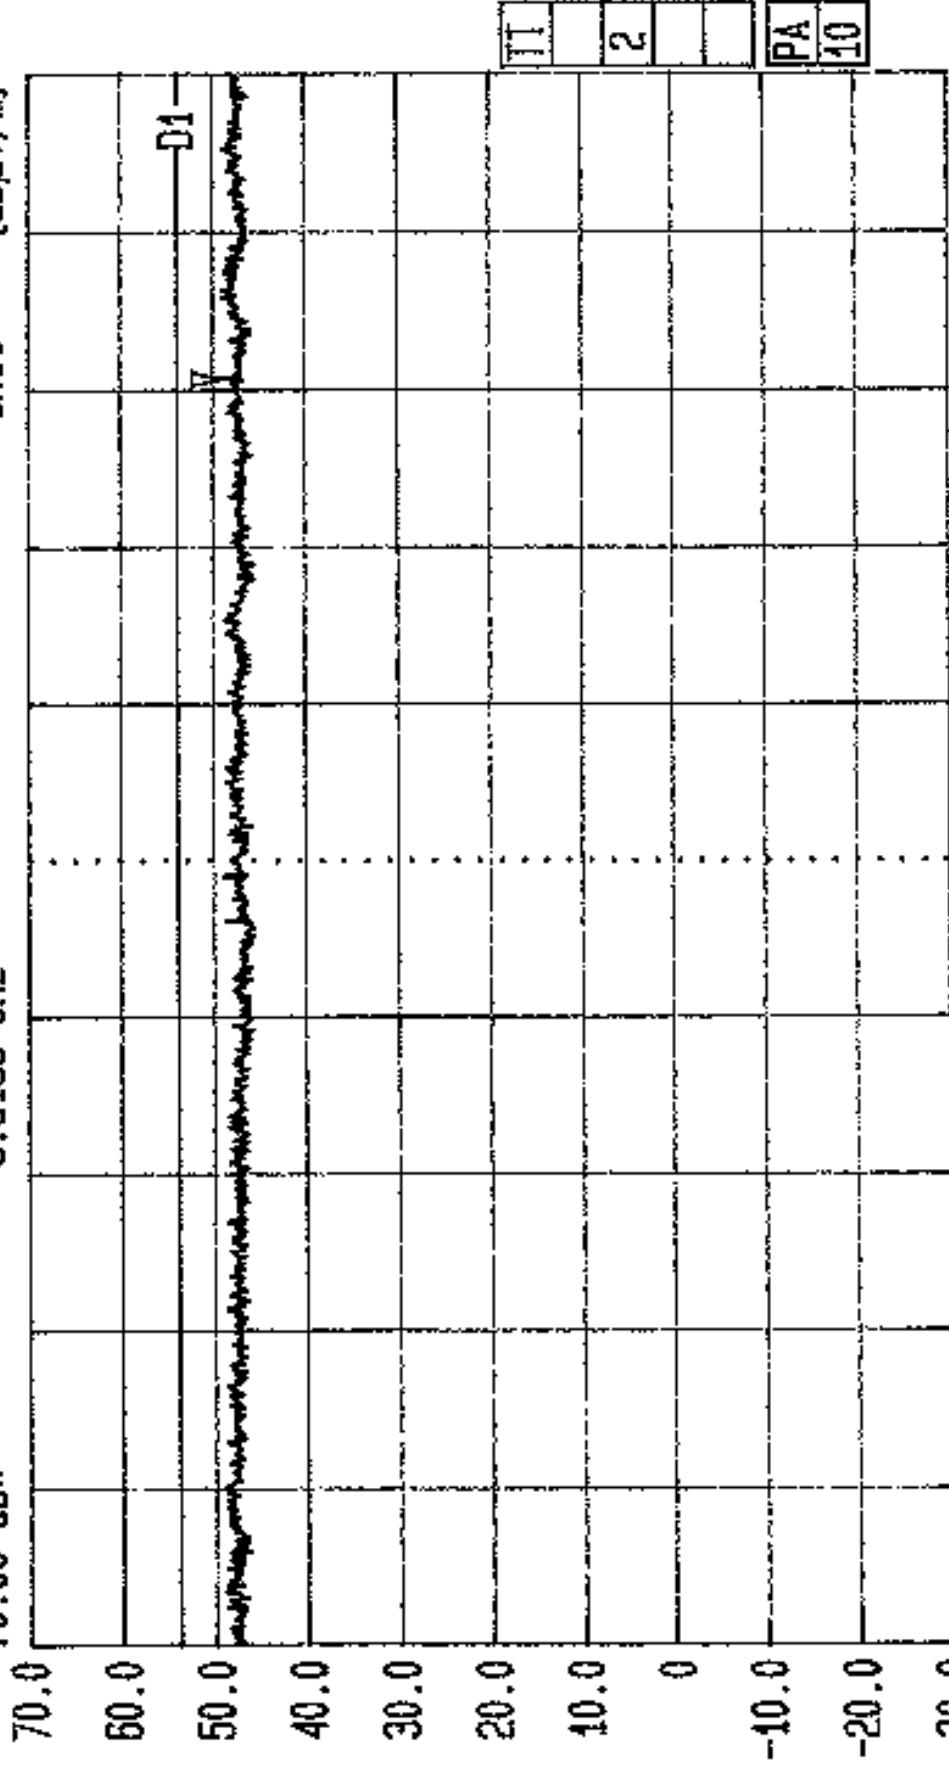


Radiated. Tested by HFI for Adaptive Broadband Ltd., EUT: AB Access Subscriber Unit.
Limit. FCC Part 15.405 (b) Rx Mode. 5.725-5.825GHz Band Bott Chan 6PH/38658/JD04/037



Date 26.Mar.'99 Time 20:33:06
Ref.Lvl 70.00 dB* Marker 49.28 dB*
3.3022 GHz

Res.Bw 1 MHz [imp] Vid.Bw 1 MHz
16.Lvl off
CF.Stp 200.000 MHz
RF.Att 0 dB
Unit [dBμV/m]

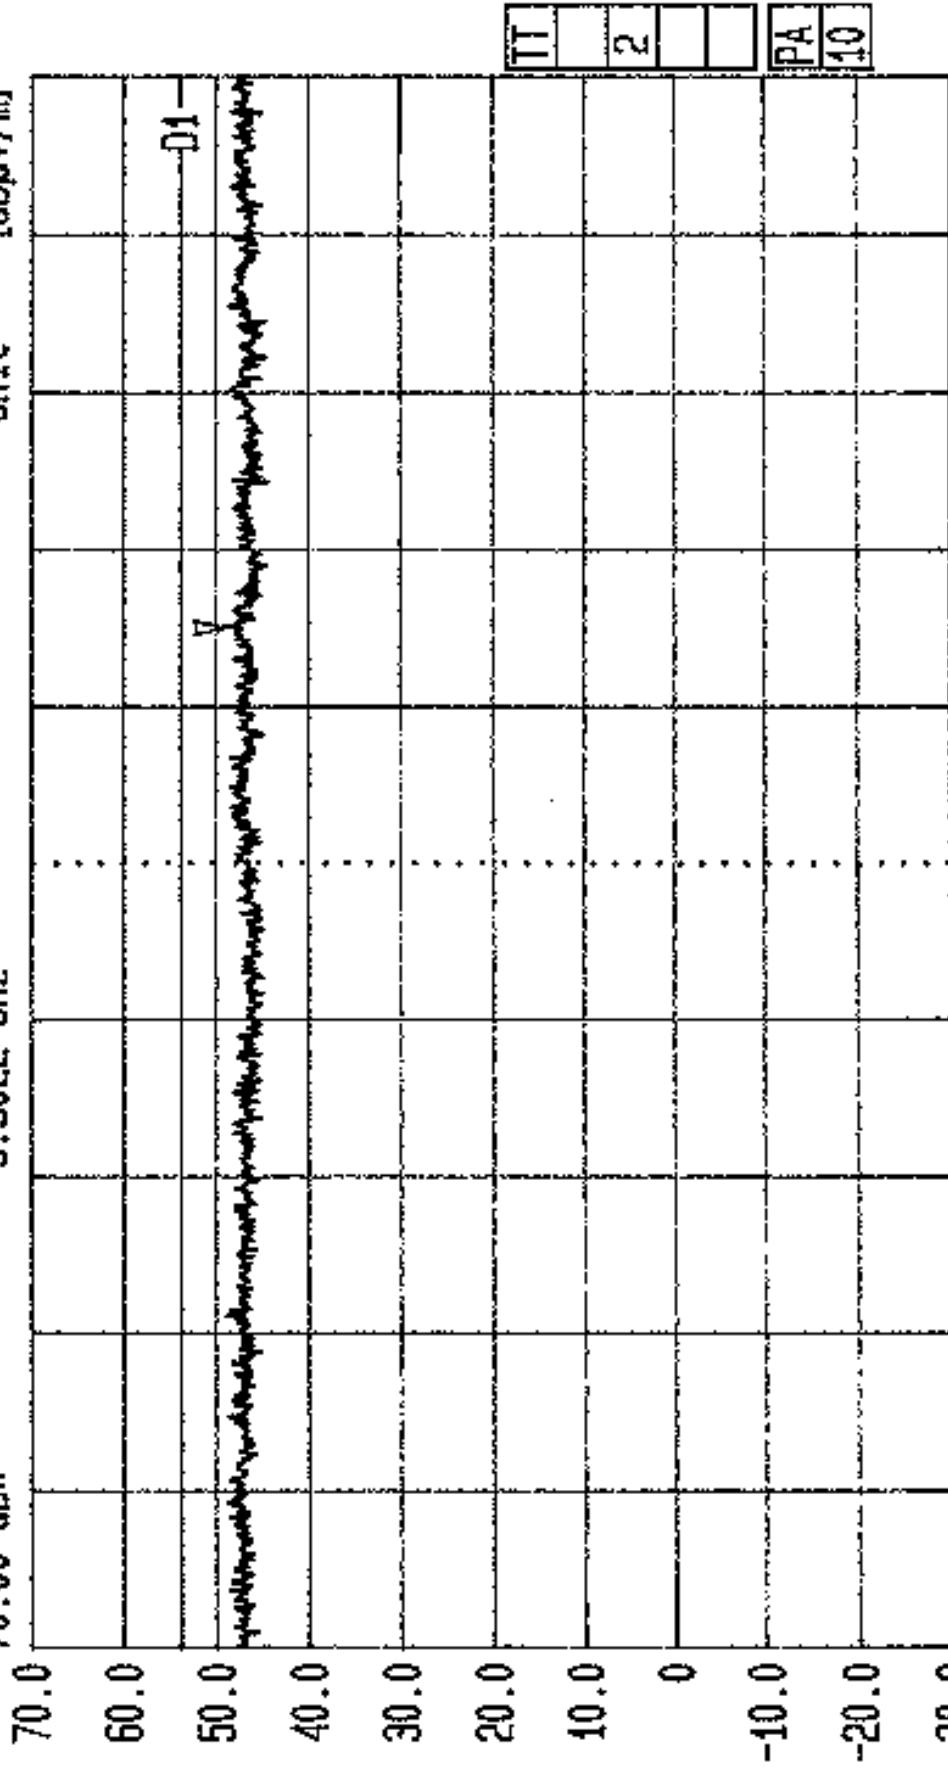

Radiated. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit.
Limit. FCC Part 15.405 (b) Rx Mode. 5.725-5.825GHz Band Top Chan 6PH/38658/JD04/038



Date 27.Mar.'99 Time 14:40:42

Ref.Lvl
70.00 dB*

Res.Bw 1 MHz [imp] Vid.Bw 1 MHz
TG.Lvl off
CF.Stp 100.000 MHz RF.Att 0 dB
Unit dB μ V/m

70.0

60.0

50.0

40.0

30.0

20.0

10.0

0

-10.0

-20.0

-30.0

D1

TT
2
PA
10

Start
4 GHz

Span
1 GHz

Center
4.5 GHz

Sweep
20 ms

Stop
5 GHz


Radiated, Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit.
Limit: FCC Part 15.405 (b) RX Mode. 5.15-5.25 GHz Band Bott Chan. 6PH/38658?JD04/039



Date 27.Mar.'99 Time 14:46:05

Ref.Lvl
70.00 dB*

Res.Bw 1 MHz [imp]
TG.Lvl off
CF.Stp 100.000 MHz
Vid.Bw 1 MHz
RF.Att 0 dB
Unit [dB μ V/m]

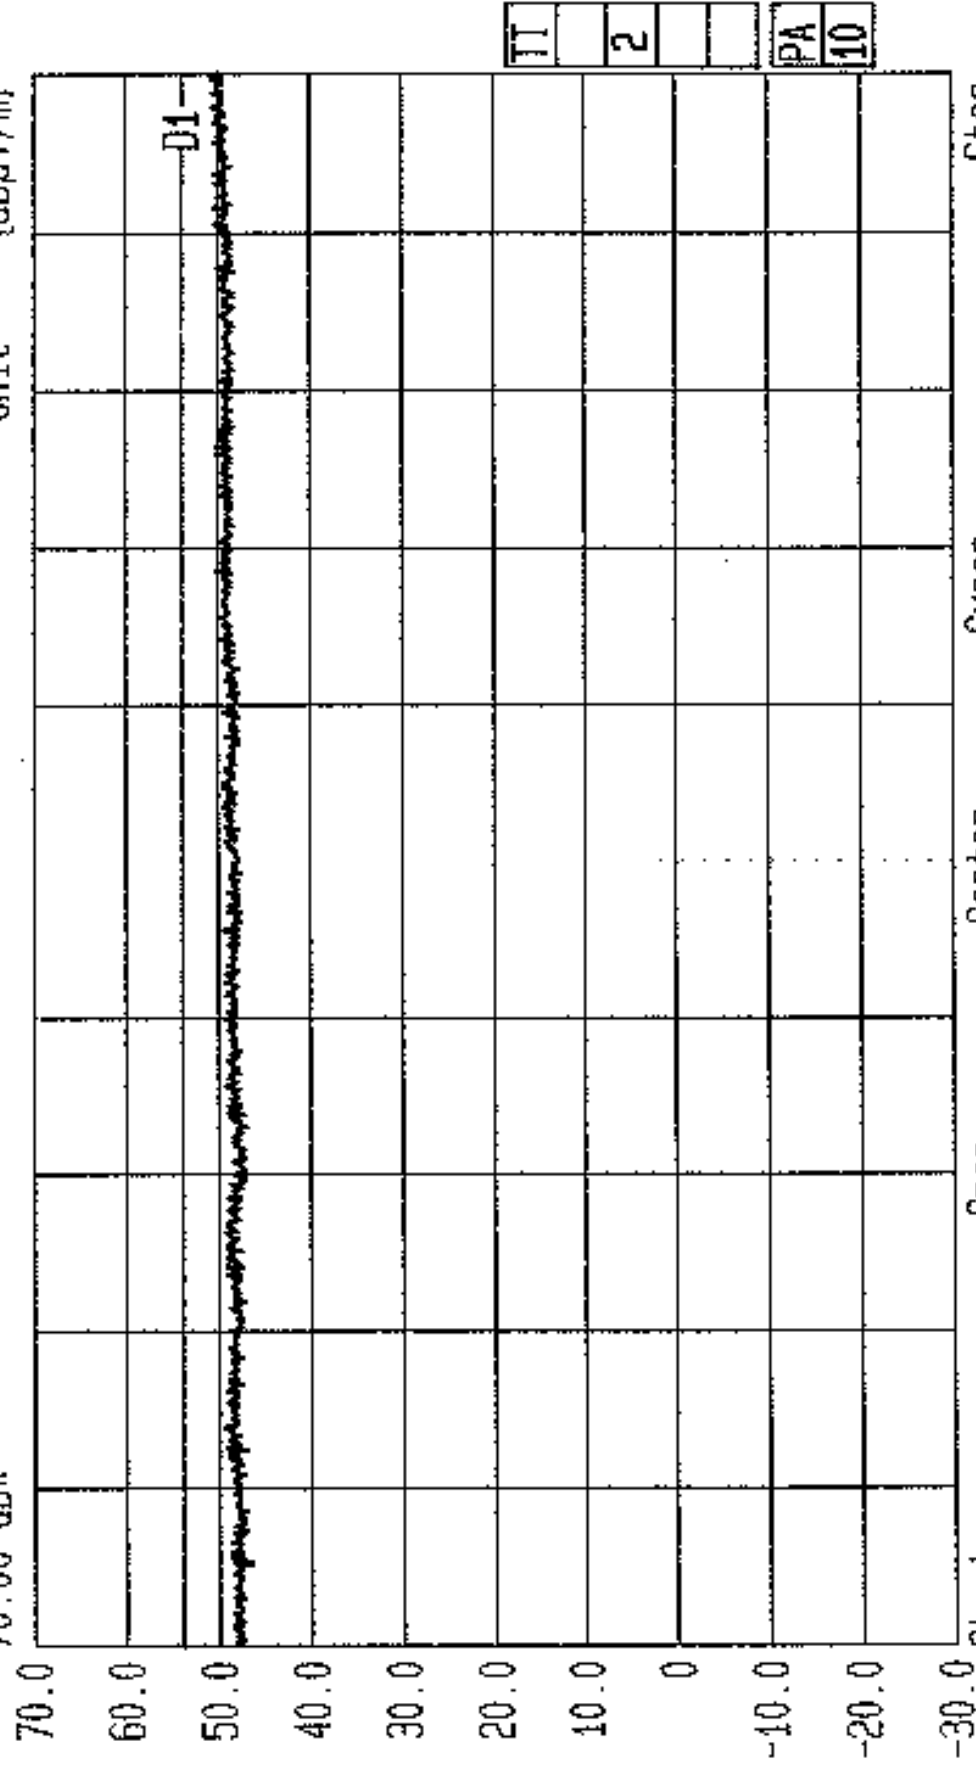


Radiated. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit.
Limit. FCC Part 15.405 (b) Rx Mode. 5.15-5.25 GHz Band Top Chan. GPH/38658/JD04/040



Date 27.Mar.'99 Time 14:51:02

Ref.Lvl
70.00 dBx

Res.Bw 1 MHz [imp]
1G.Lvl off
CF.Stp 100.000 MHz
Vid.Bw 1 MHz
RF.Att 0 dB
Unit [dBuV/m]

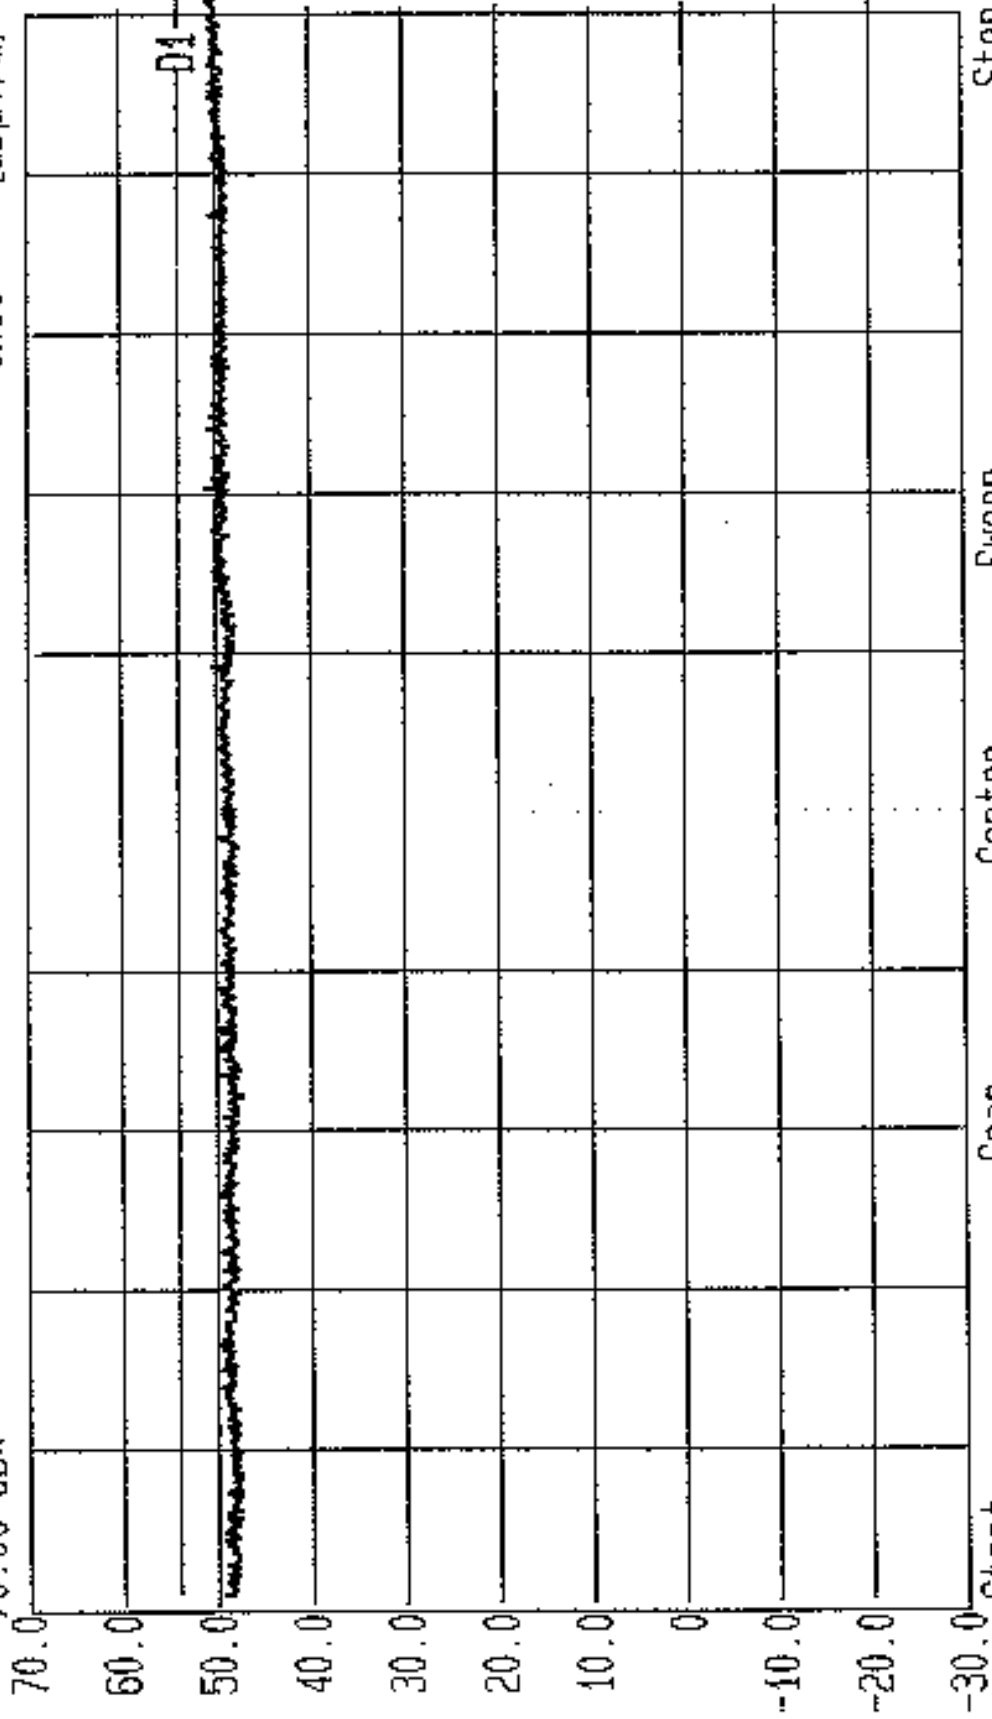

TT 2 PA 10

Start 4 GHz Stop 5 GHz
Span 1 GHz Sweep 20 ms
Center 4.5 GHz


Radiated. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit.
Limit. FCC Part 15.405 (b) Rx Mode. 5.25-5.35 GHz Band Bott Chan. GPH/38658/J004/041



Date 27.Mar.'99 Time 14:56:22

Ref.Lvl
70.00 dBx

Res.Bw 1 MHz [imp]
100.000 MHz
1 MHz
0 dB
AF.Att
Unit
[dBμV/m]

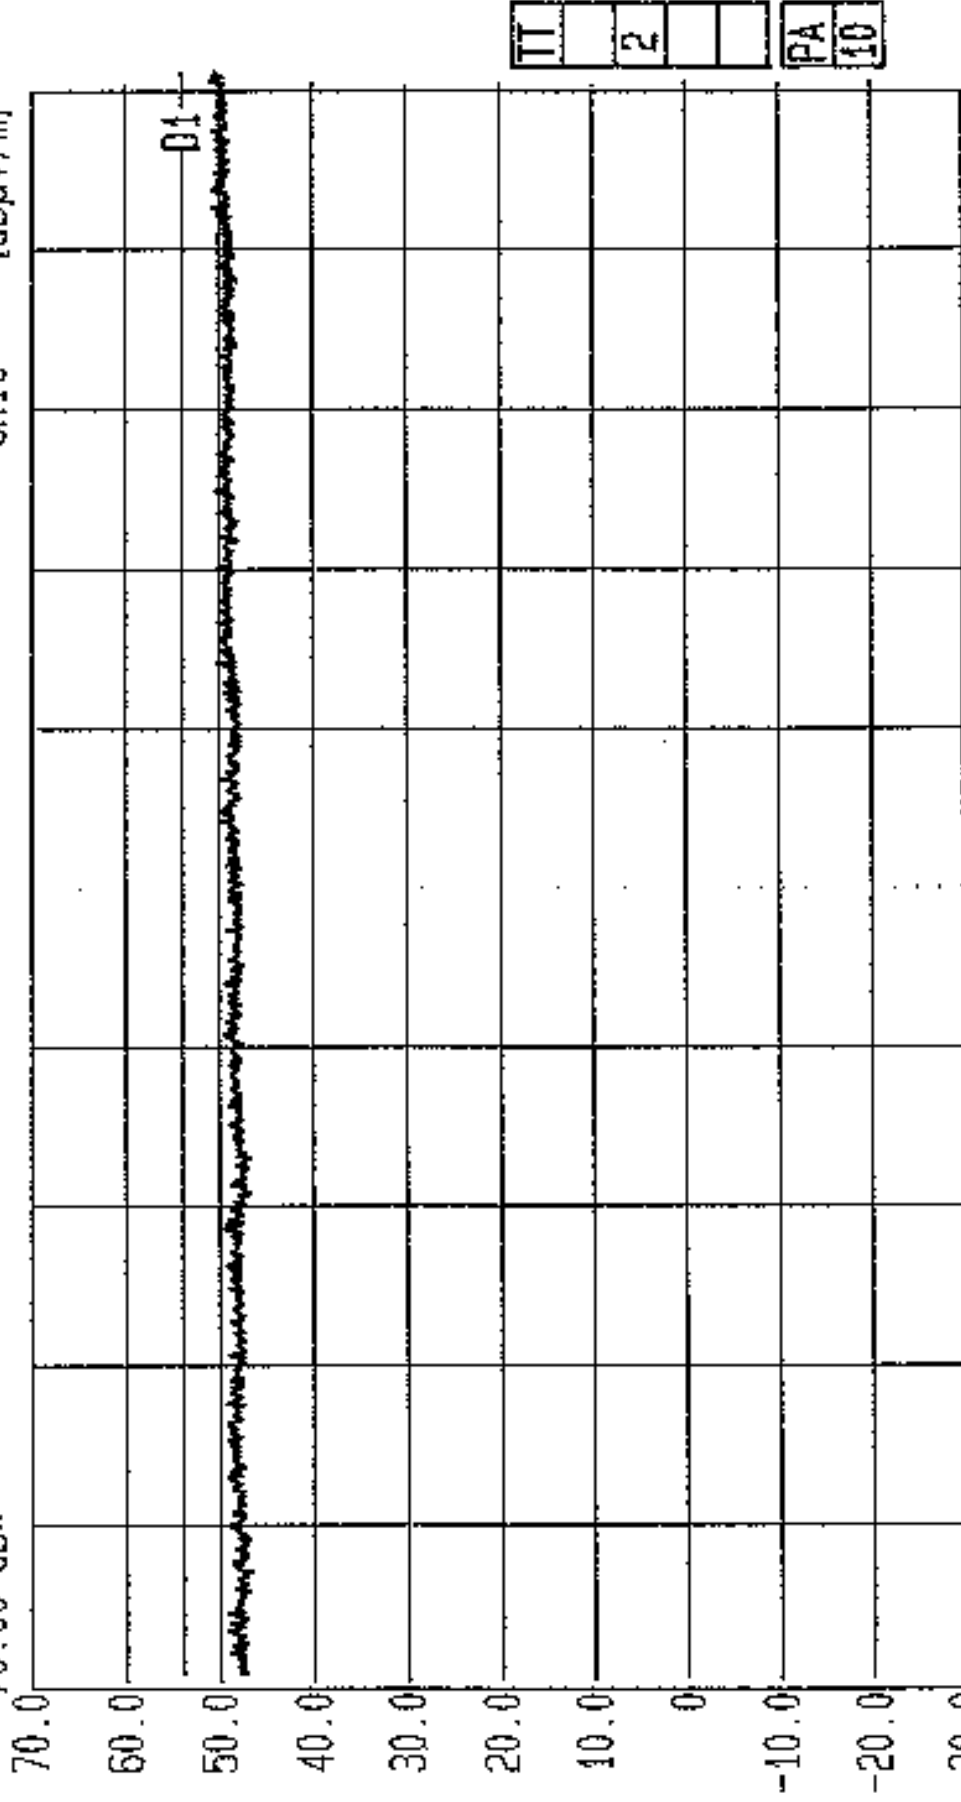

Radiated. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit.
Limit. FCC Part 15.405 (b) Rx Mode. 5.25-5.35 GHz Band Top Chan. 6PH/38658/J004/042



Date 27.Mar.'99 Time 15:05:02

Ref.Lvl
70.00 dB*

Res.Bw 1 MHz {imp}
T6.Lvl Off
CF.Stp 100.000 MHz
Vid.Bw 1 MHz
RF.Att 0 dB
Unit dB μ V/m

70.0

60.0

50.0

40.0

30.0

20.0


10.0

0

-10.0

-20.0

-30.0

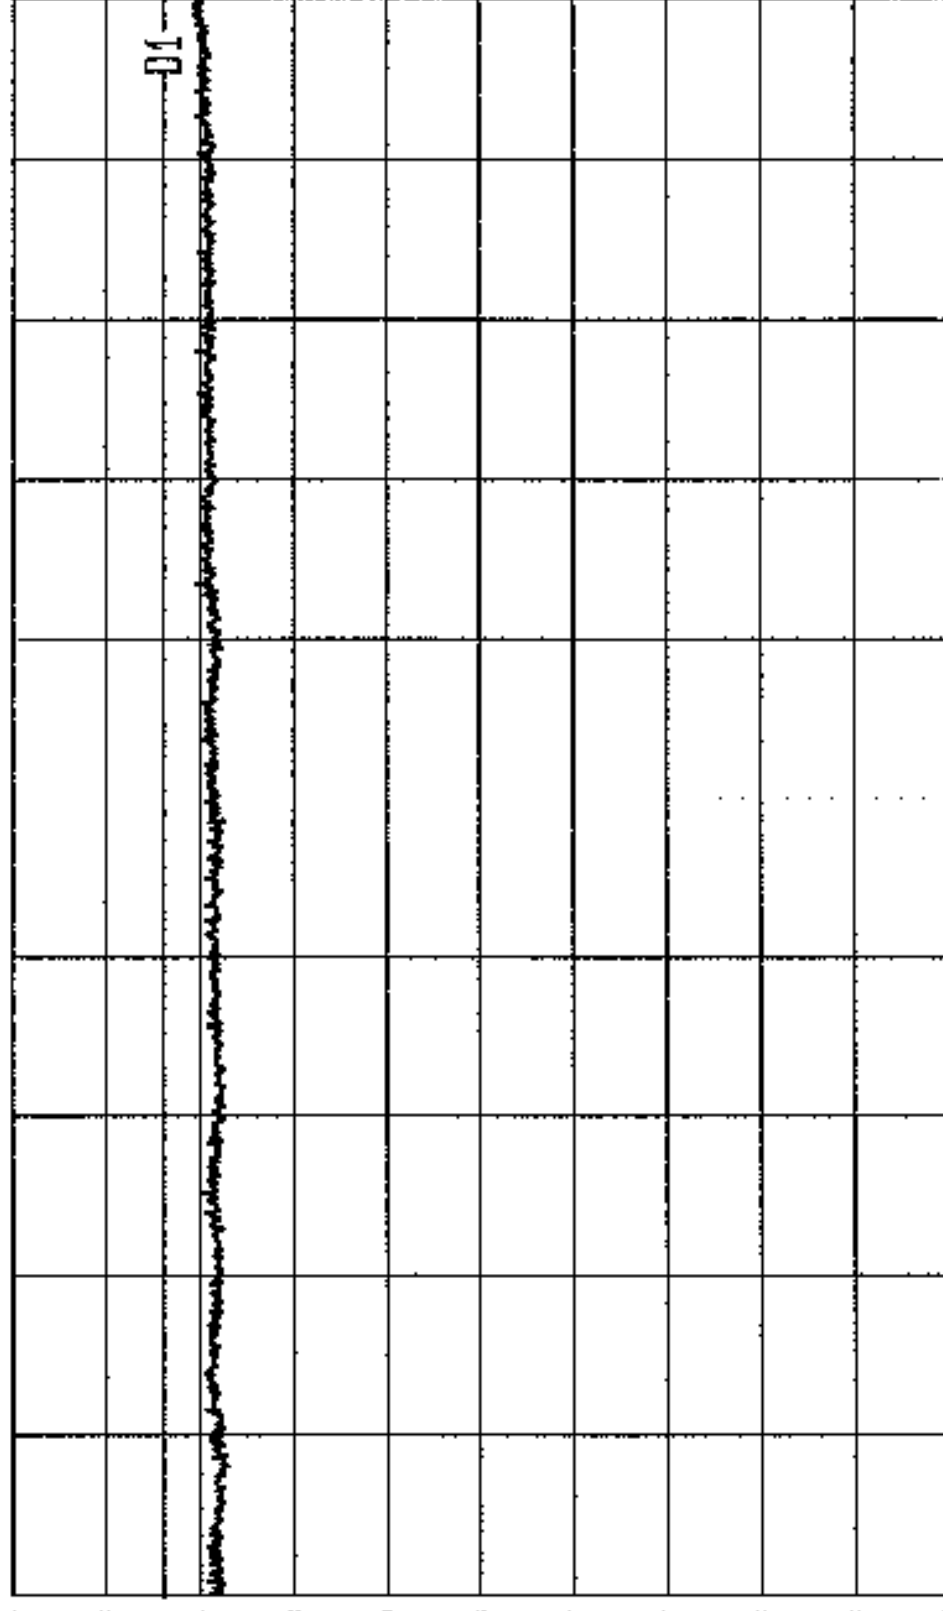

TT
2
PA
10

Start 4 GHz Span 1 GHz Center 4.5 GHz Sweep 20 ms Stop 5 GHz

Radiated. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit.
Limit. FCC Part 15.405 (b). Rx Mode 5.725-5.825 GHz Band Bot Chan GPH/38658/JD04/043



Date 27.Mar.'99 Time 15:10:00

Ref.Lvl
70.00 dB*

Res.Bw 1 MHz [imp]
T6.Lvl Off
CF.Stp 100.000 MHz
Vid.Bw 1 MHz
PF.Att 0 dB
Unit [dB μ V/m]

70.0

60.0

50.0

40.0

30.0

20.0


10.0

0

-10.0

-20.0

-30.0

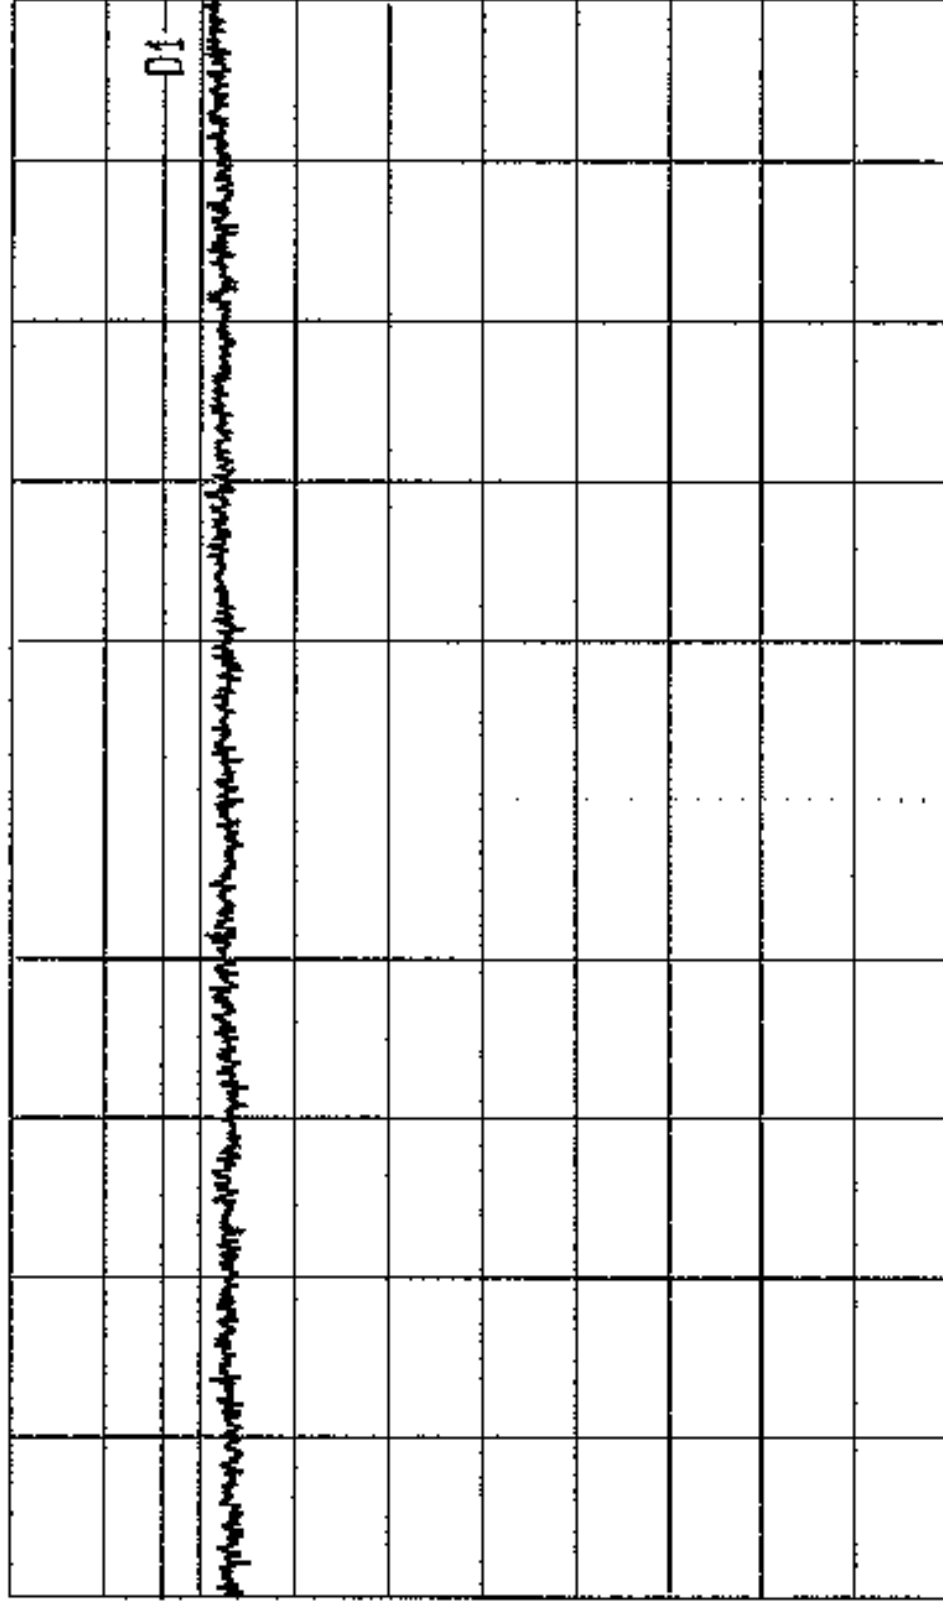

TT

2

PA

10

Start 4 GHz Span 1 GHz Center 4.5 GHz Sweep 20 ms Stop 5 GHz


Radiated. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit.
Limit. FCC Part 15.405 (b) . Rx Mode 5.725-5.825 GHz Band Top Chan 6PH/39658/JD04/044



Date 27.Mar.'99 Time 15:15:00

Ref.Lvl
70.00 dB*

Res.Bw 1 MHz [imp] Vid.Bw 1 MHz
TG.Lvl off
CF.Stp 100.000 MHz RF.Att 0 dB
Unit {dB μ V/m}

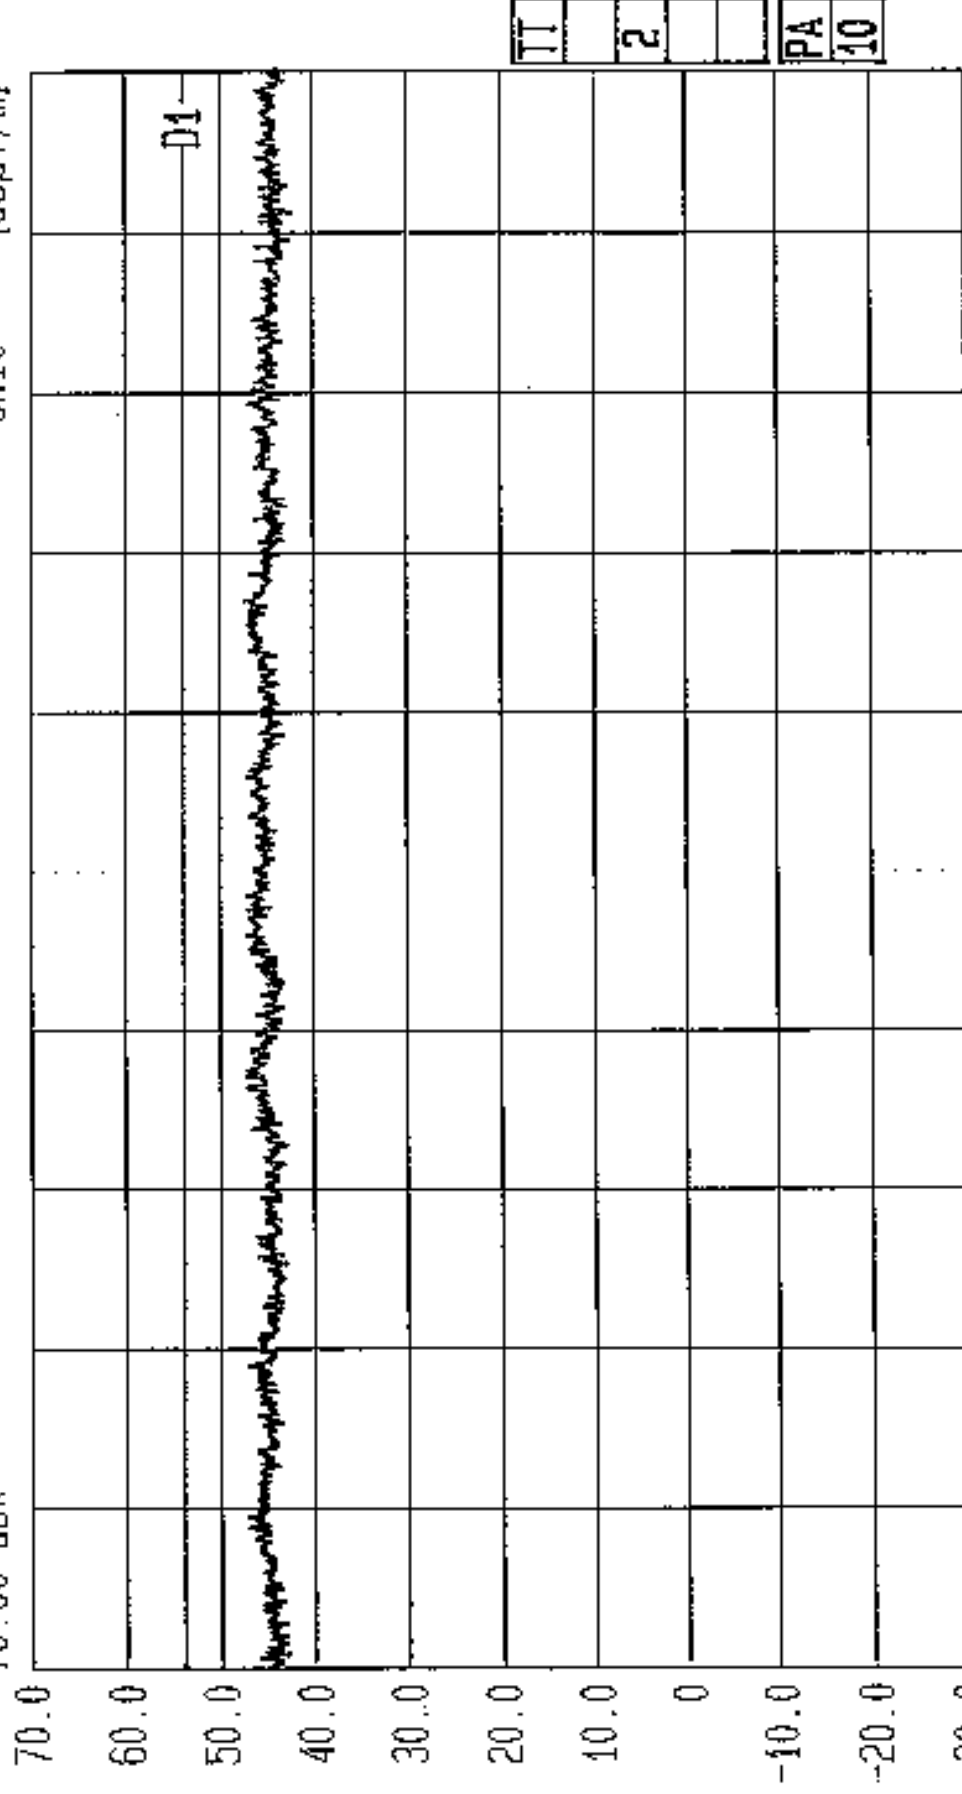

Radiated. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit.
Limit. FCC Part 15.405 (b). Rx Mode 5.15-5.25 GHz Band Bot Chan GPH/38658/J004/045



Date 27.Mar.'99 Time 15:20:30

Ref.Lvl
70.00 dB*

Res.Bw 1 MHz [imp] Vid.Bw 1 MHz
TG.Lvl Off
CF.Stp 100.000 MHz RF.Att 0 dB
Unit [dB μ V/m]

70.0

60.0

50.0

40.0

30.0

20.0


10.0

0

-10.0

-20.0

-30.0

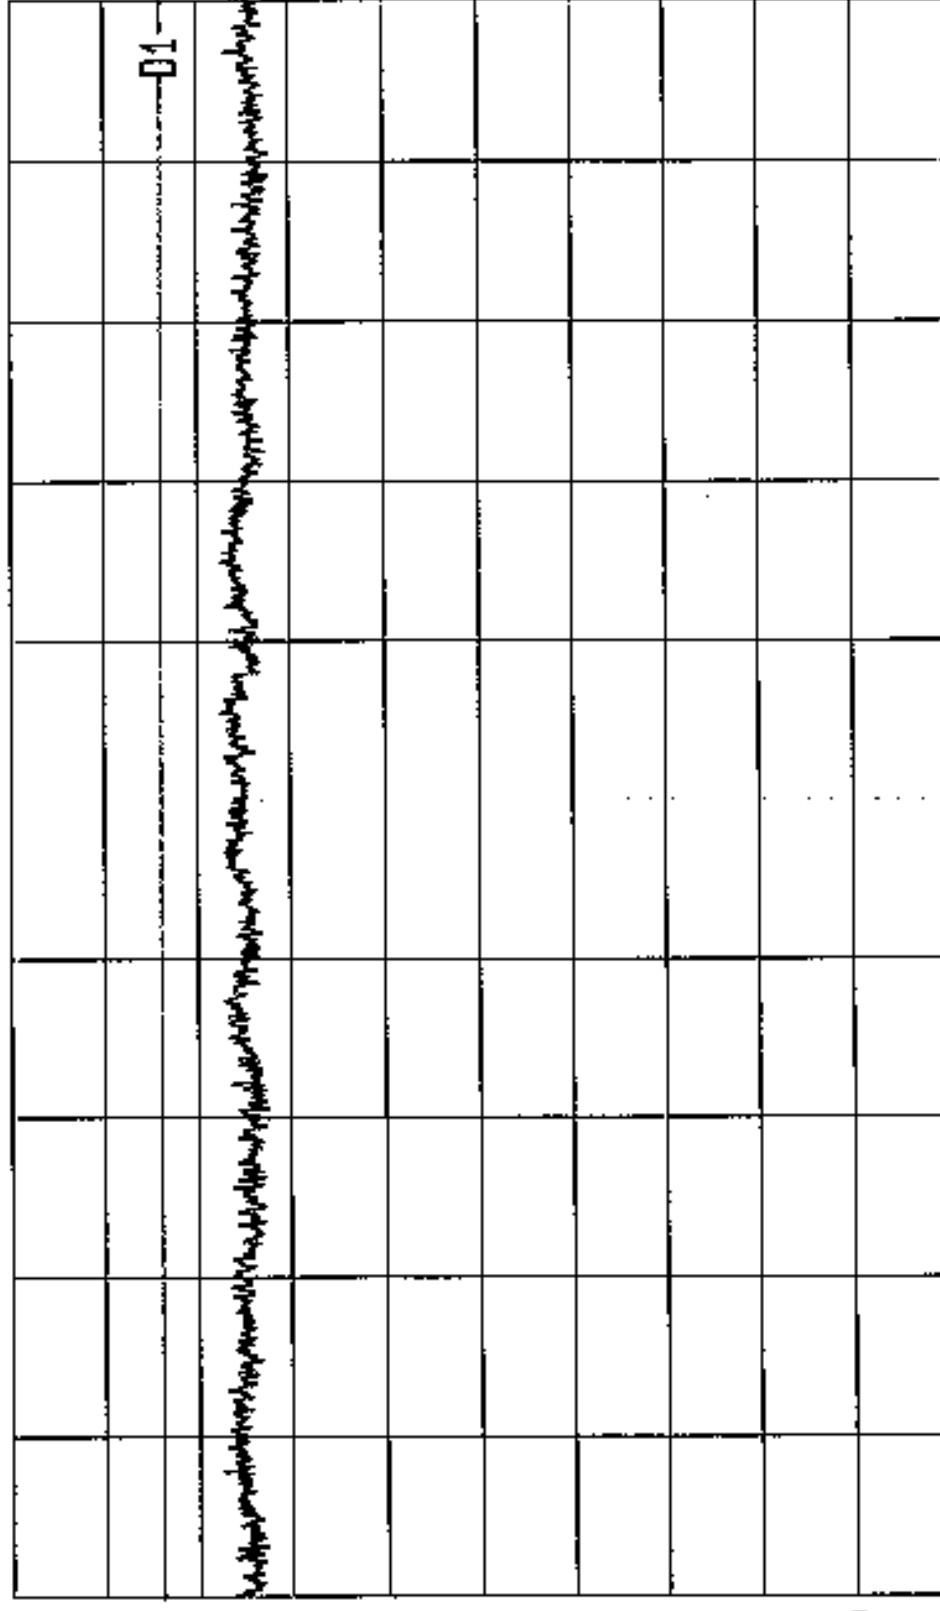

TT
2
PA
10

Start 5 GHz Span 1 GHz Center 5.5 GHz Sweep 20 ms Stop 6 GHz


Radiated, Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit.
Limit, FCC Part 15.405 (b). Rx Mode 5.15-5.25 GHz Band Top Chan GPH/38658/JD04/046



Date 27.Mar.'99 Time 15:25:39

Ref.Lvl
70.00 dB*

Res.Bw 1 MHz [imp] Vid.Bw 1 MHz
TG.Lvl off
CF.Stp 100.000 MHz RF.Att 0 dB
Unit [dBμV/m]

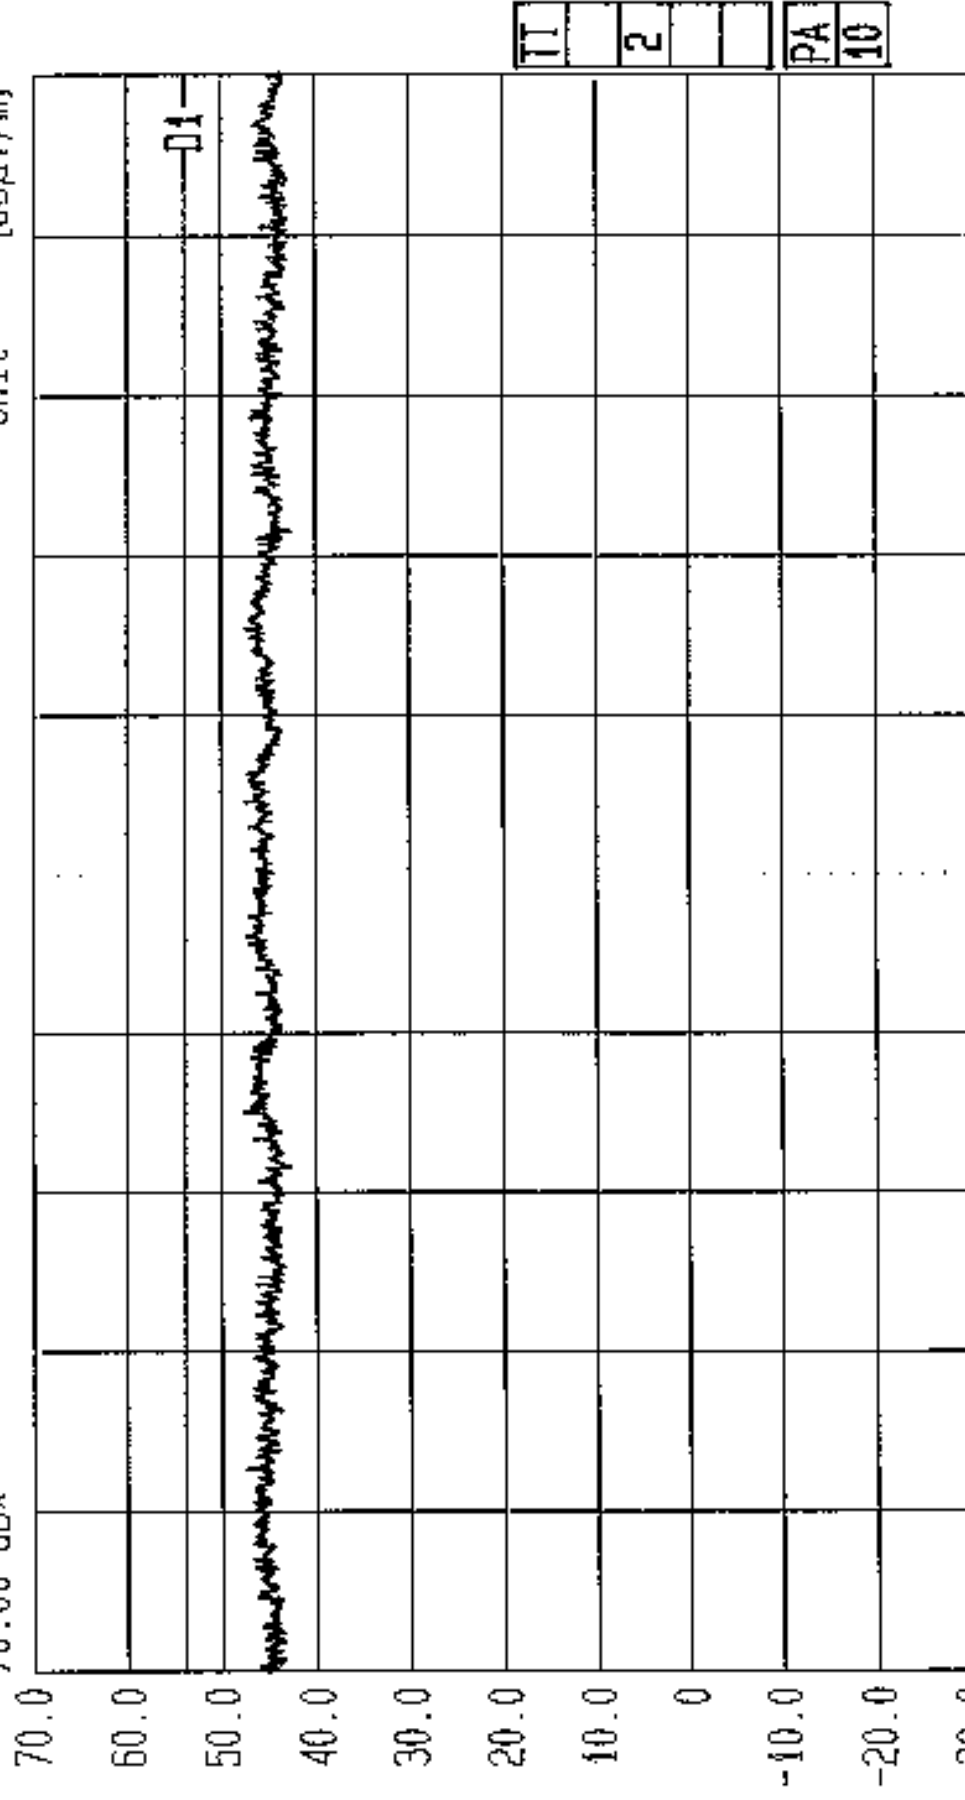

Start 5 GHz Stop 6 GHz
Span 1 GHz Sweep 20 ms
Center 5.5 GHz

Radiated. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit.
Limit. FCC Part 15.405 (b). RX Mode 5.25-5.35 GHz Band Bot Chan GPH/38658/JD04/047



Date 27.Mar.'99 Time 15:30:37

Ref.Lvl

70.00 dB*

Res.Bw

1 MHz

TG.Lvl

Off

1 MHz [imp]

Off

100.000 MHz

Vid.Bw

1 MHz

RF.Att

0 dB

Unit

[dB μ V/m]

70.0

60.0

50.0

40.0

30.0

20.0

10.0

0

-10.0

-20.0

-30.0

D1

TT

2

PA

10

Start

5 GHz

Span

1 GHz

Center

5.5 GHz

Sweep

20 ms

Stop

6 GHz

Radiated. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit.
Limit. FCC Part 15.405 (b). Rx Mode 5.25-5.35 GHz Band Top Chan 6PH/38658/JD04/048




Date 27.Mar.'99 Time 15:35:46

Ref.Lvl
70.00 dBx

Res.BW 1 MHz [imp]
100.000 MHz
0 dB
Unit [dBuV/m]

Vid.BW 1 MHz

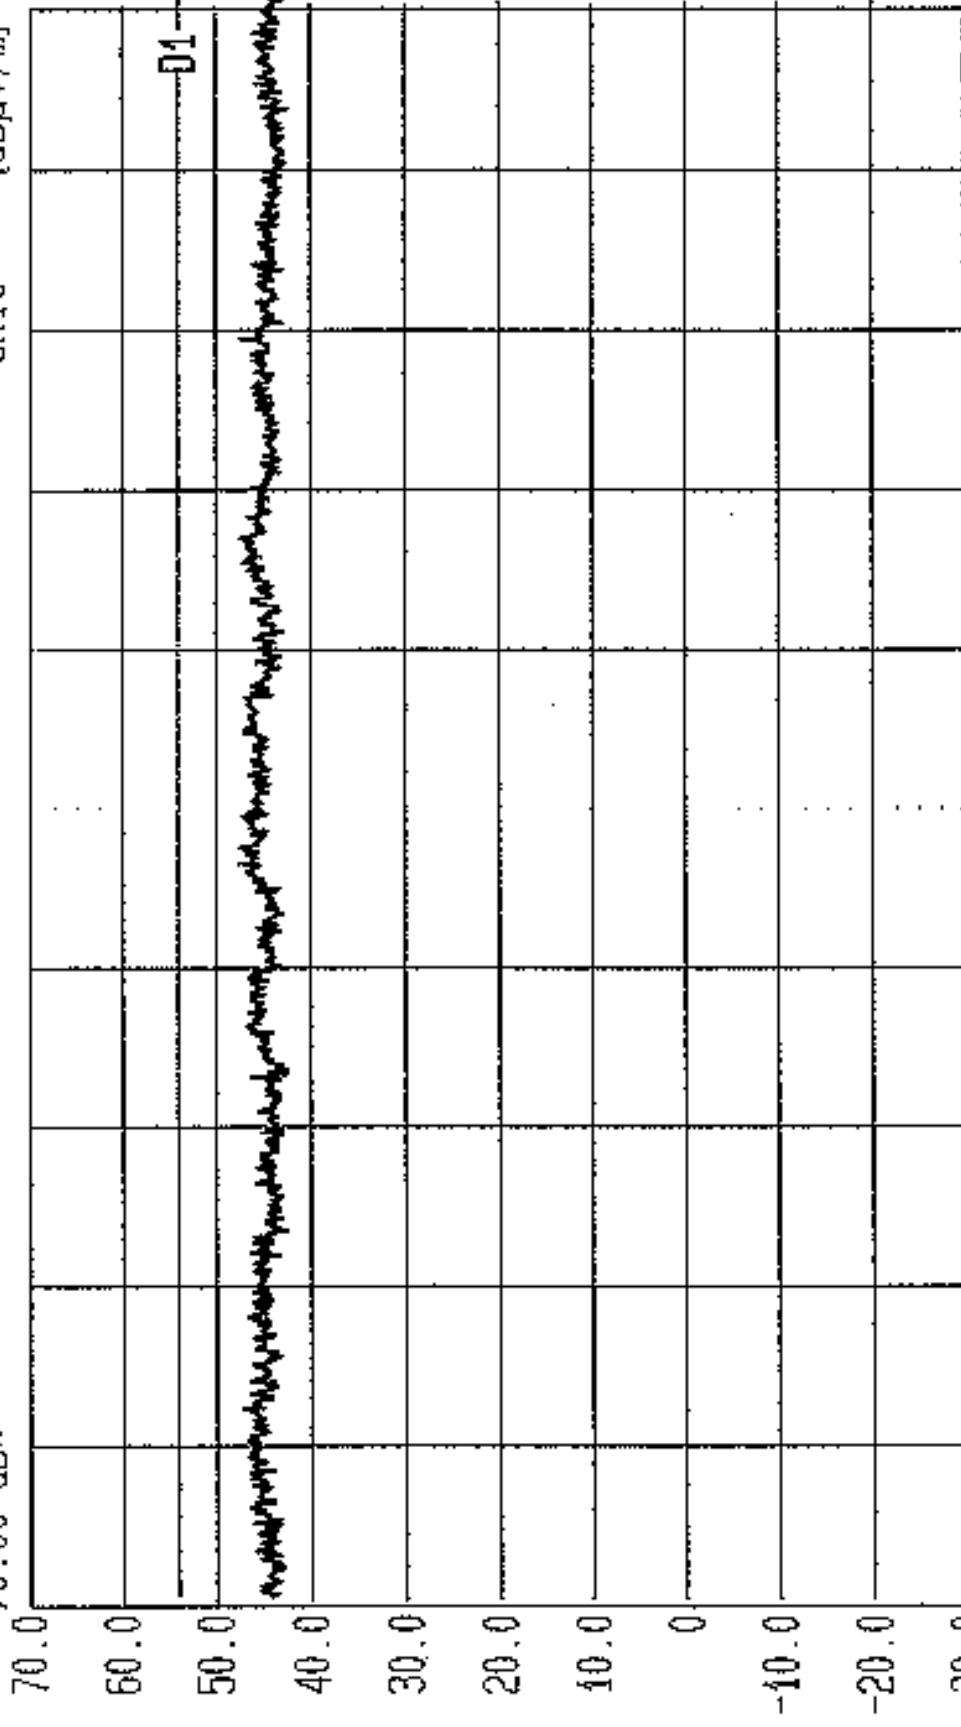

11 2 PA 10

Start 5 GHz Stop 6 GHz
Span 1 GHz Sweep 20 ms
Center 5.5 GHz

Radiated, Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit.
Limit. FCC Part 15.405 (b) . Rx Mode 5.725-5.825 GHz Band Bot Chan GPH/38658/JD04/049



Date 27.Mar.'99 Time 15:41:10

Ref.Lvl
70.00 dB*

Res.Bw 1 MHz [imp]
TG.Lvl Off
CF.Stp 100.000 MHz
Vid.Bw 1 MHz
RF.Att 0 dB
Unit [dB μ V/m]

70.0

60.0

50.0

40.0

30.0

20.0


10.0

0

-10.0

-20.0

-30.0

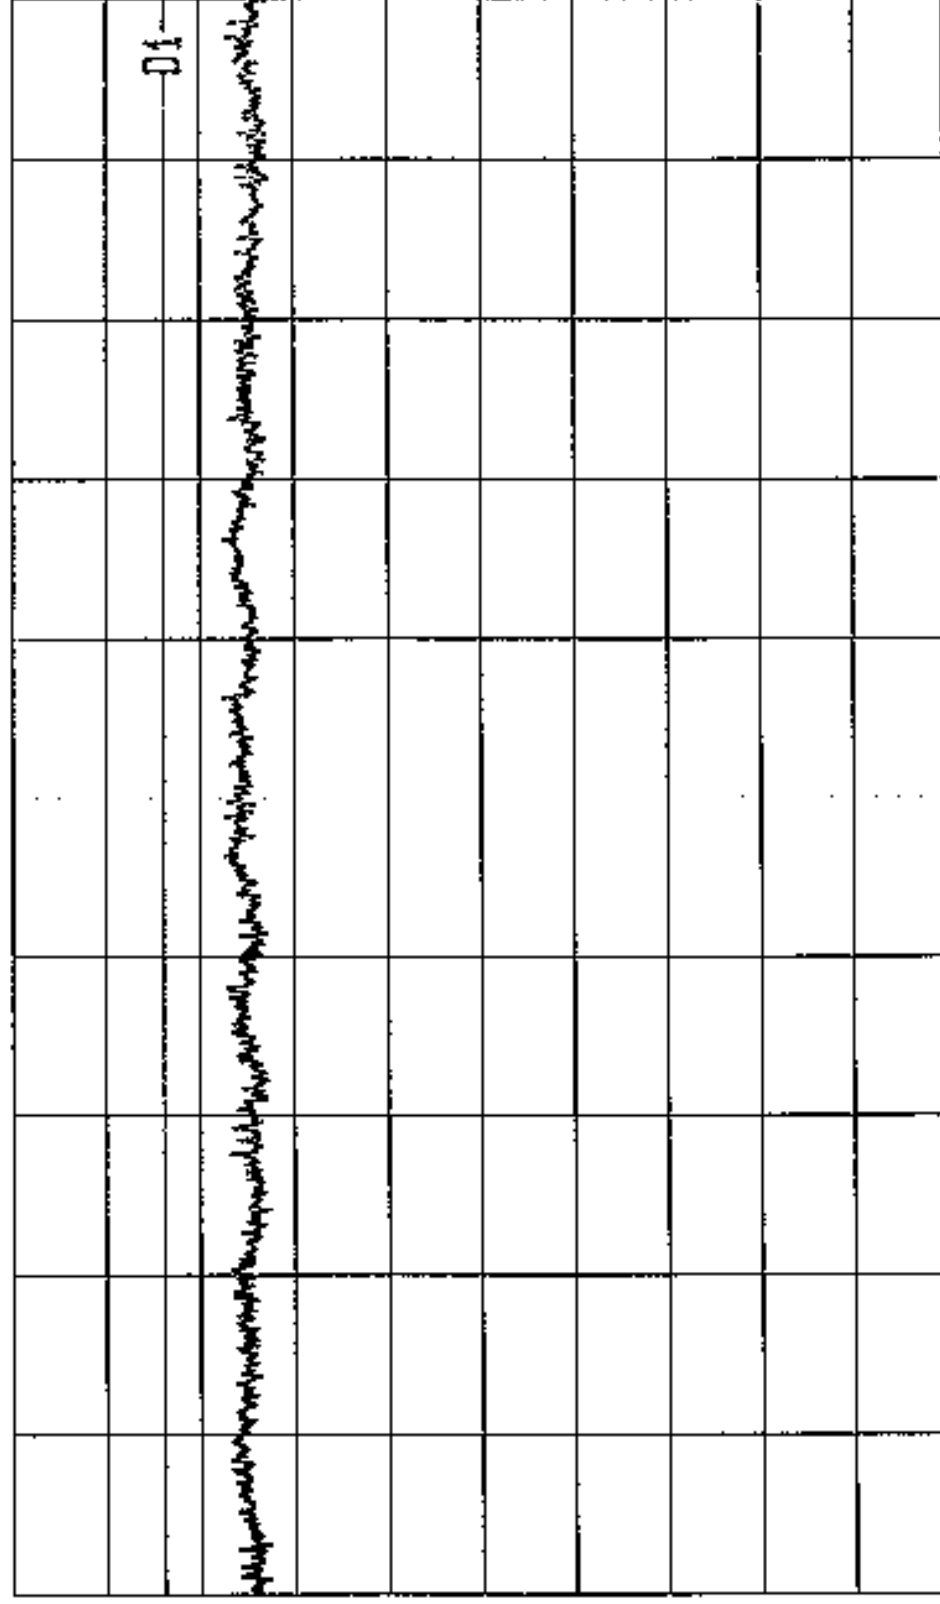

TT
2

PA
10

Start 5 GHz Span 1 GHz Center 5.5 GHz Sweep 20 ms Stop 6 GHz


Radiated. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit.
Limit. FCC Part 15.405 (b). Rx Mode 5.725-5.825 GHz Band Top Chan GPH/38658/JD04/050



Date 27.Mar.'99 Time 15:46:25

Ref.Lvl
70.00 dB*

Res.Bw	1 MHz [imp]	Vid.Bw	1 MHz
TG.Lvl	Off	RF.Atte	0 dB
CF.Stp	220.000 MHz	Unit	[dBμV/m]

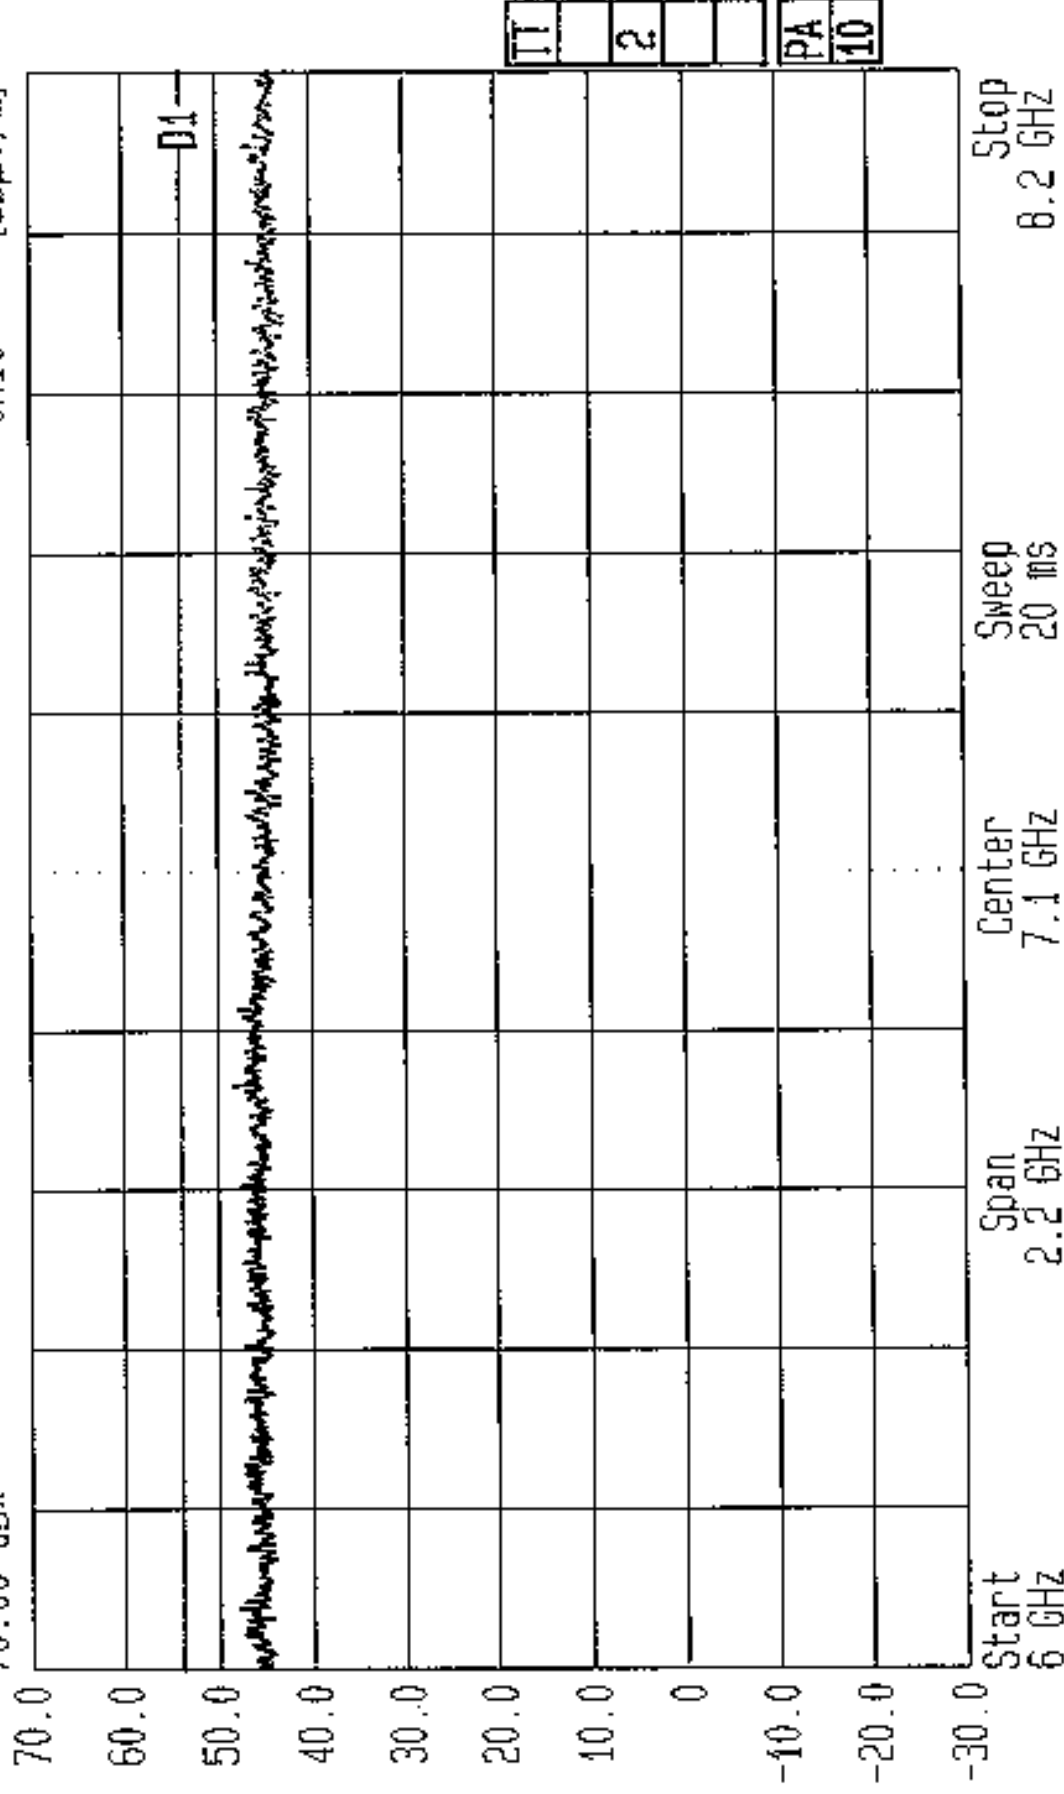

Radiated, Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit.
Limit, FCC Part 15.405 (b). Rx Mode 5.15-5.25 GHz Band Bot Chan GPH/38658/JD04/051


Start	Span	Center	Sweep	Stop
6 GHz	2 GHz	7.1 GHz	20 ms	8.2 GHz



Date 27.Mar.'99 Time 15:51:26

Ref.Lvl
70.00 dBx

Res.Bw 1 MHz [imp] Vid.Bw 1 MHz
T6.Lvl Off
CF.Stp 220.000 MHz RF.Att 0 dB
Unit [dBμV/m]

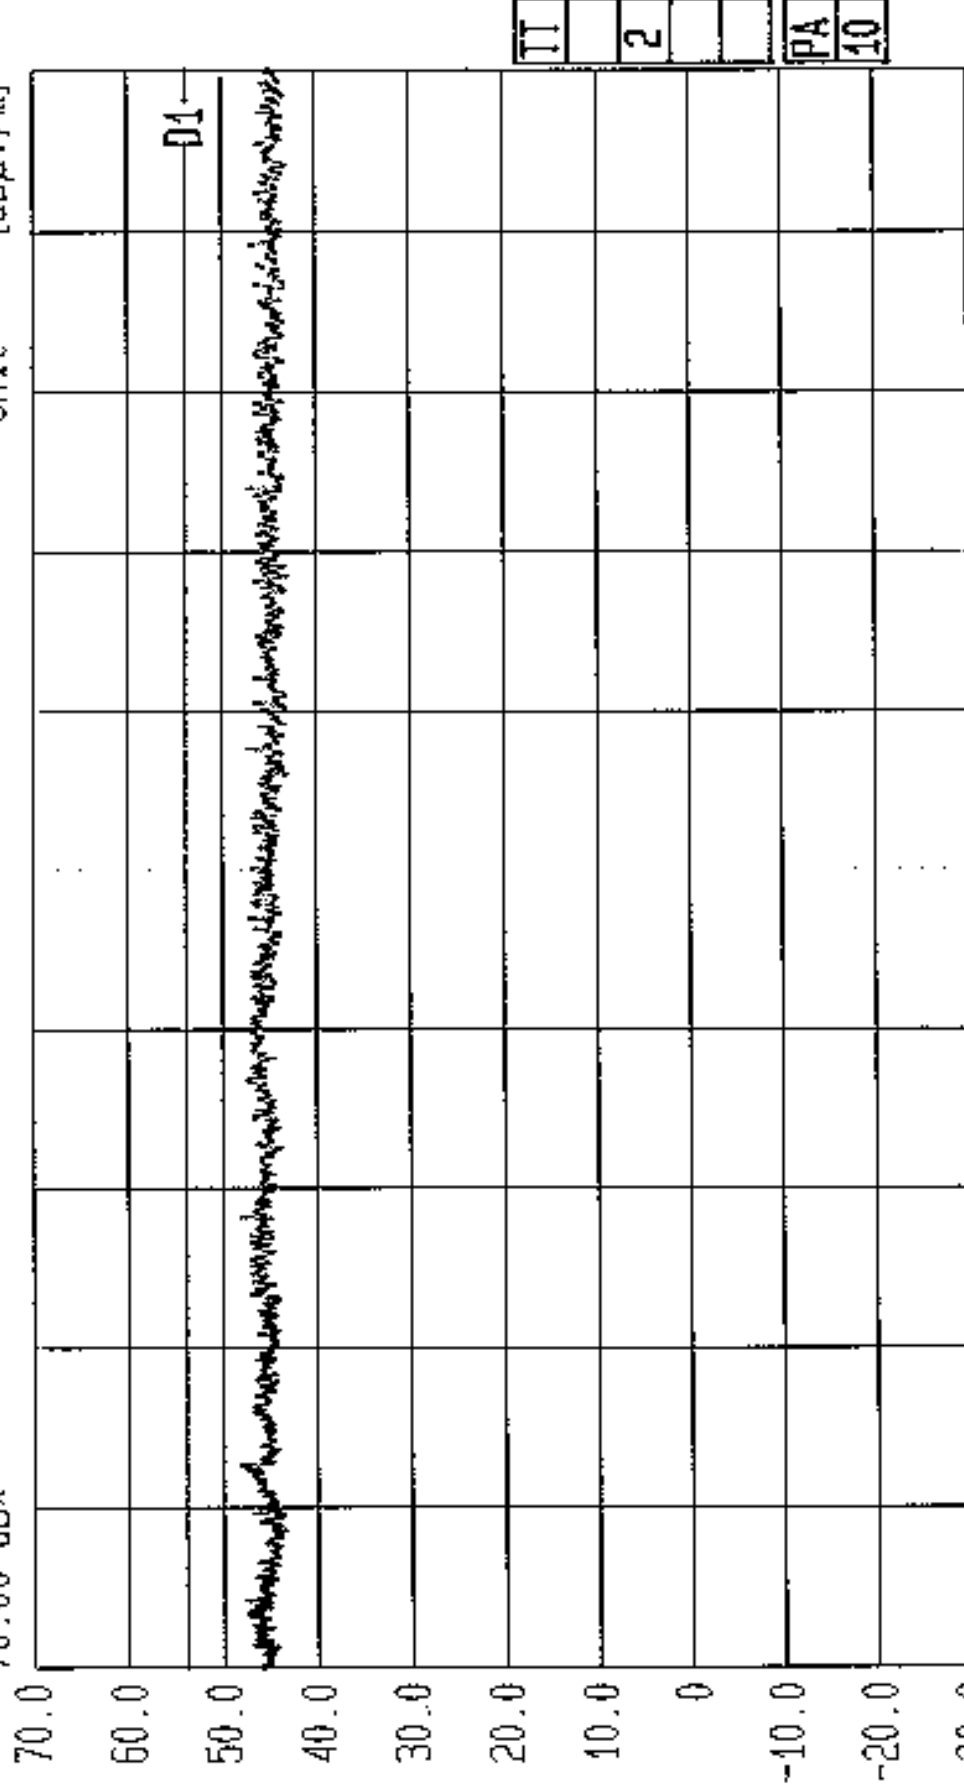


Radiated. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit.
Limit. FCC Part 15.405 (b). Rx Mode 5.15-5.25 GHz Band Top Chan GPH/38658/J004/052



Date 27.Mar.'99 Time 15:56:27

Ref.Lvl
70.00 dB*

Res.Bw 1 MHz [imp] Vid.Bw 1 MHz
TG.Lvl Off
CF.Stp 220.000 MHz RF.Att 0 dB
Unit [dB μ V/m]

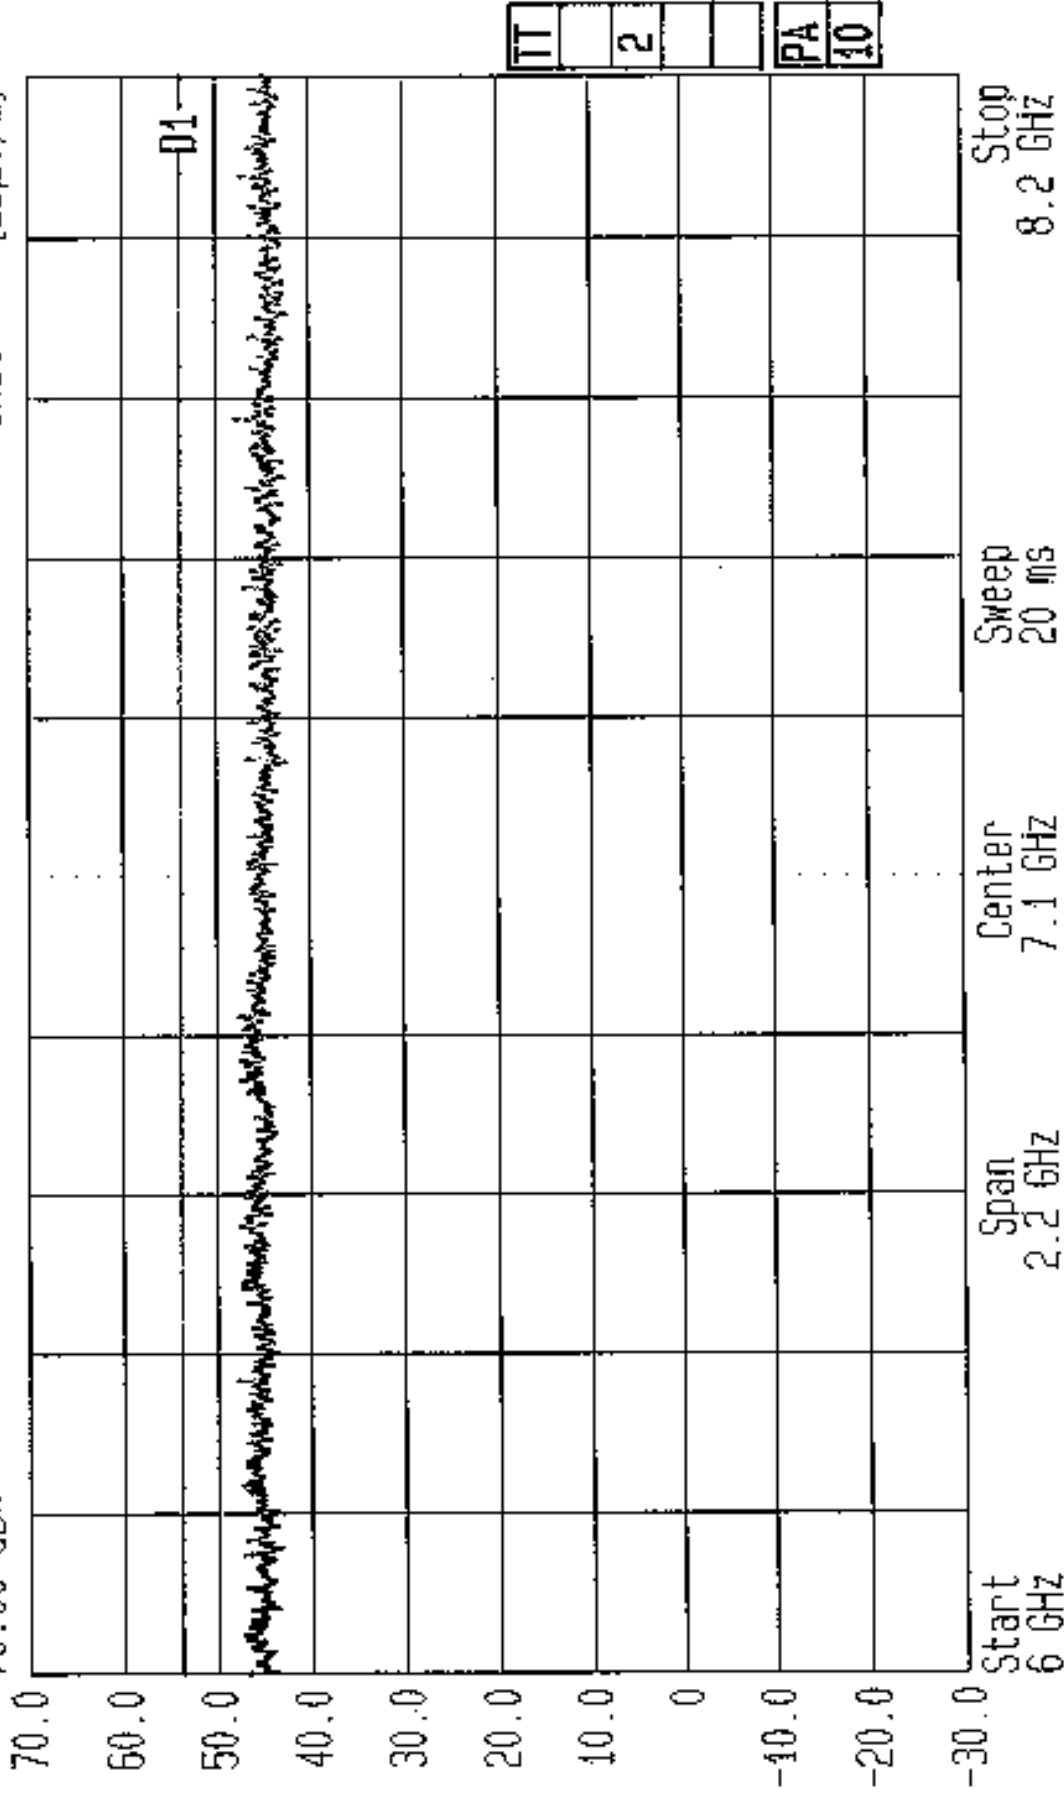

Radiated. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit.
Limit. FCC Part 15.405 (b). Rx Mode 5.25-5.35 GHz Band Bot Chan GPH/38658/JD04/053



Date 27.Mar.'99 Time 15:01:31

Ref.Lvl

70.00 dB*

Res.Bw

TG.Lvl

CF.Stp

1 MHz [imp]

Off

220.000 MHz

Vid.Bw

1 MHz

RF.Att

0 dB

Unit

(dBuV/m)

70.0

60.0

50.0

40.0

30.0

20.0


10.0

0

-10.0

-20.0

-30.0

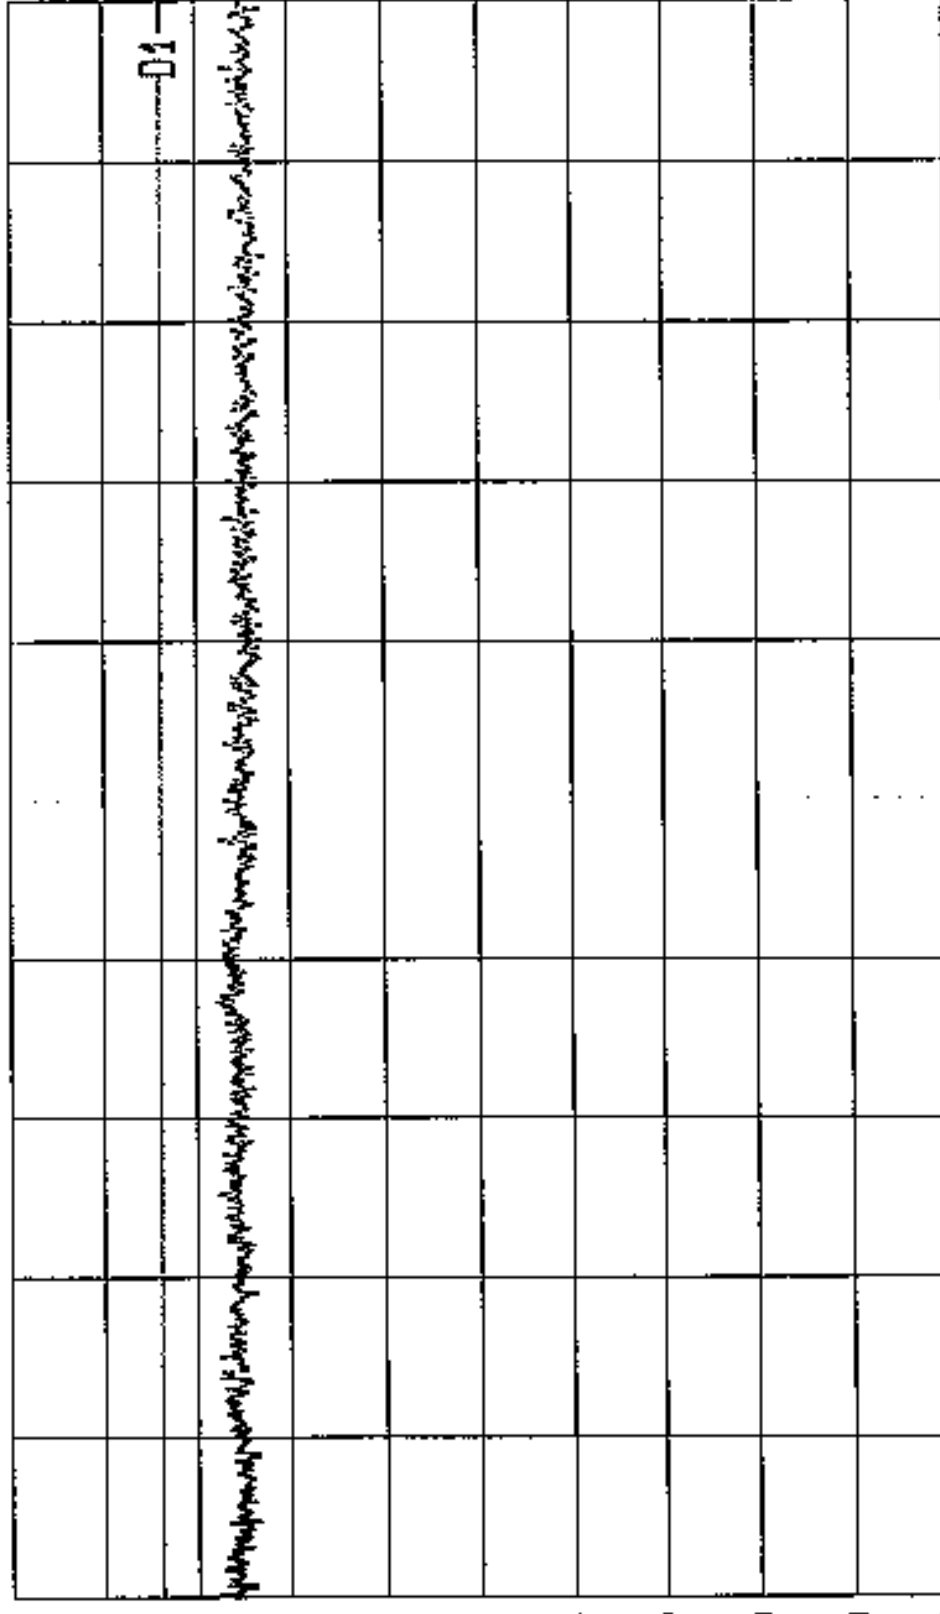

Start

6 GHz

Span

2.2 GHz

Center

7.1 GHz

Sweep

20 ms

Stop

8.2 GHz

TT

2

PA

10


Radiated. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit.
Limit. FCC Part 15.405 (b). Rx Mode 5.25-5.35 GHz Band Top Chan GPH/38658/J004/054



Date 27.Mar.'99 Time 16:06:39

Ref.Lvl
70.00 dB*

Res.Bw 1 MHz [imp]
TG.Lvl off
CF.Stp 220.000 MHz
Vid.Bw 1 MHz
RF.Att 0 dB
Unit dBμV/m

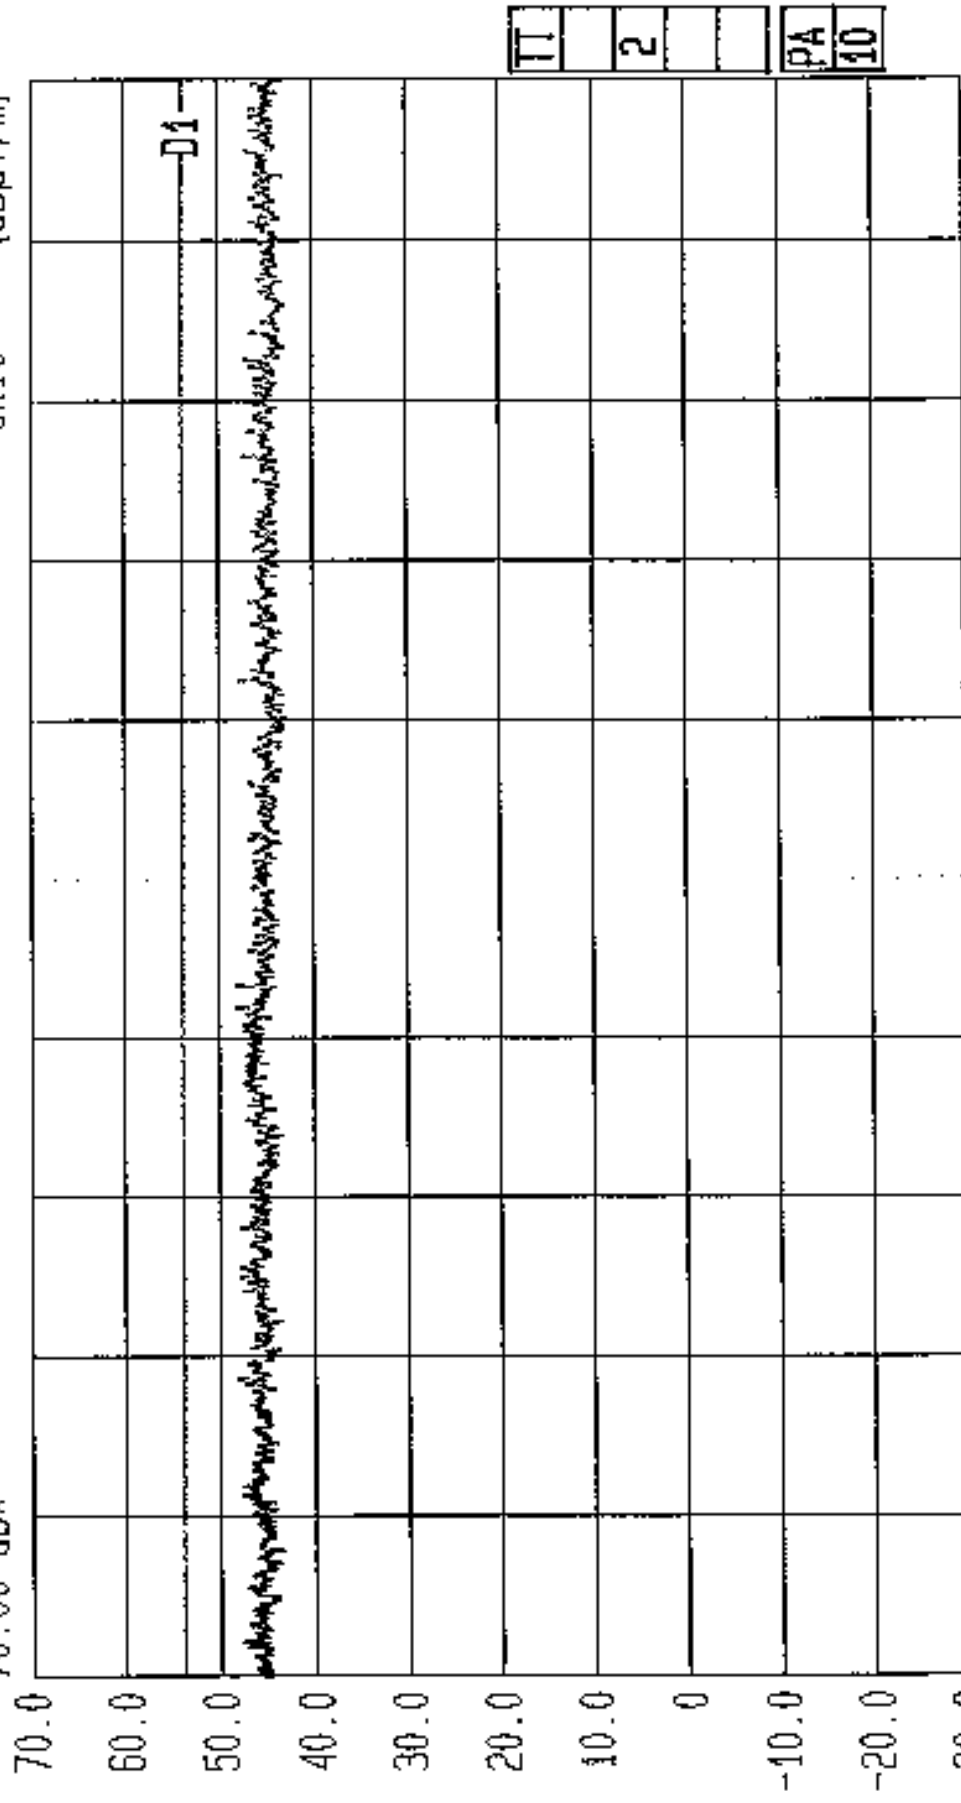

Radiated. Tested by AFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit.
Limit. FCC Part 15.405 (b). Ax Mode 5.725-5.825 GHz Band Bot Chan 6PH/38558/J004/055



Date 27.Mar.'99 Time 16:11:59

Ref.Lvl

70.00 dB*

Res.Bw

TG.Lvl

CF.Stp

1 MHz [imp]

Off

220.000 MHz

Vid.Bw

1 MHz

RF.Att

0 dB

Unit [dBμV/m]

70.0

60.0

50.0

40.0

30.0

20.0


10.0

0

-10.0

-20.0

-30.0

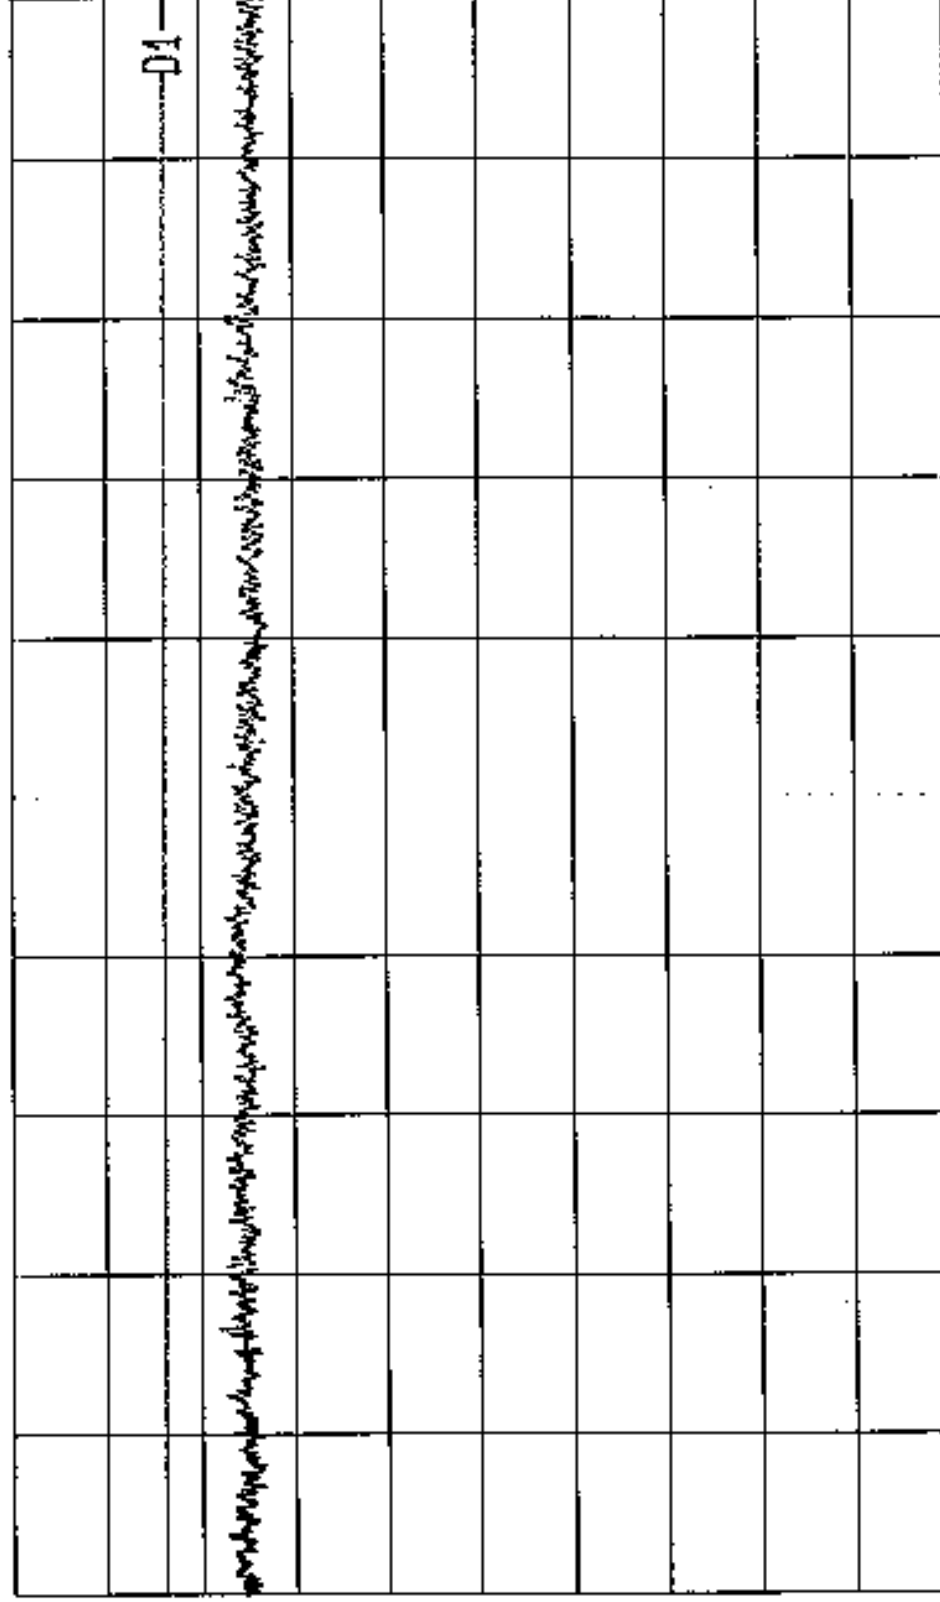

Start
6 GHz

Span
2.2 GHz

Center
7.1 GHz

Sweep
20 ms

Stop
8.2 GHz

TT
2
PA
10


Radiated, Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit.
Limit. FCC Part 15.405 (b). Rx Mode 5.725-5.825 GHz Band Top Chan GPH/38658/JD04/056



Date 27.Mar.'99 Time 16:30:09

Ref.Lvl 70.00 dB* Marker 49.64 dB* B.2000 GHz

Res.Bw 1 MHz [imp] off
TG.Lvl CF.Stp
Vid.Bw 1 MHz
RF.Att 0 dB
Unit [dBμV/m]

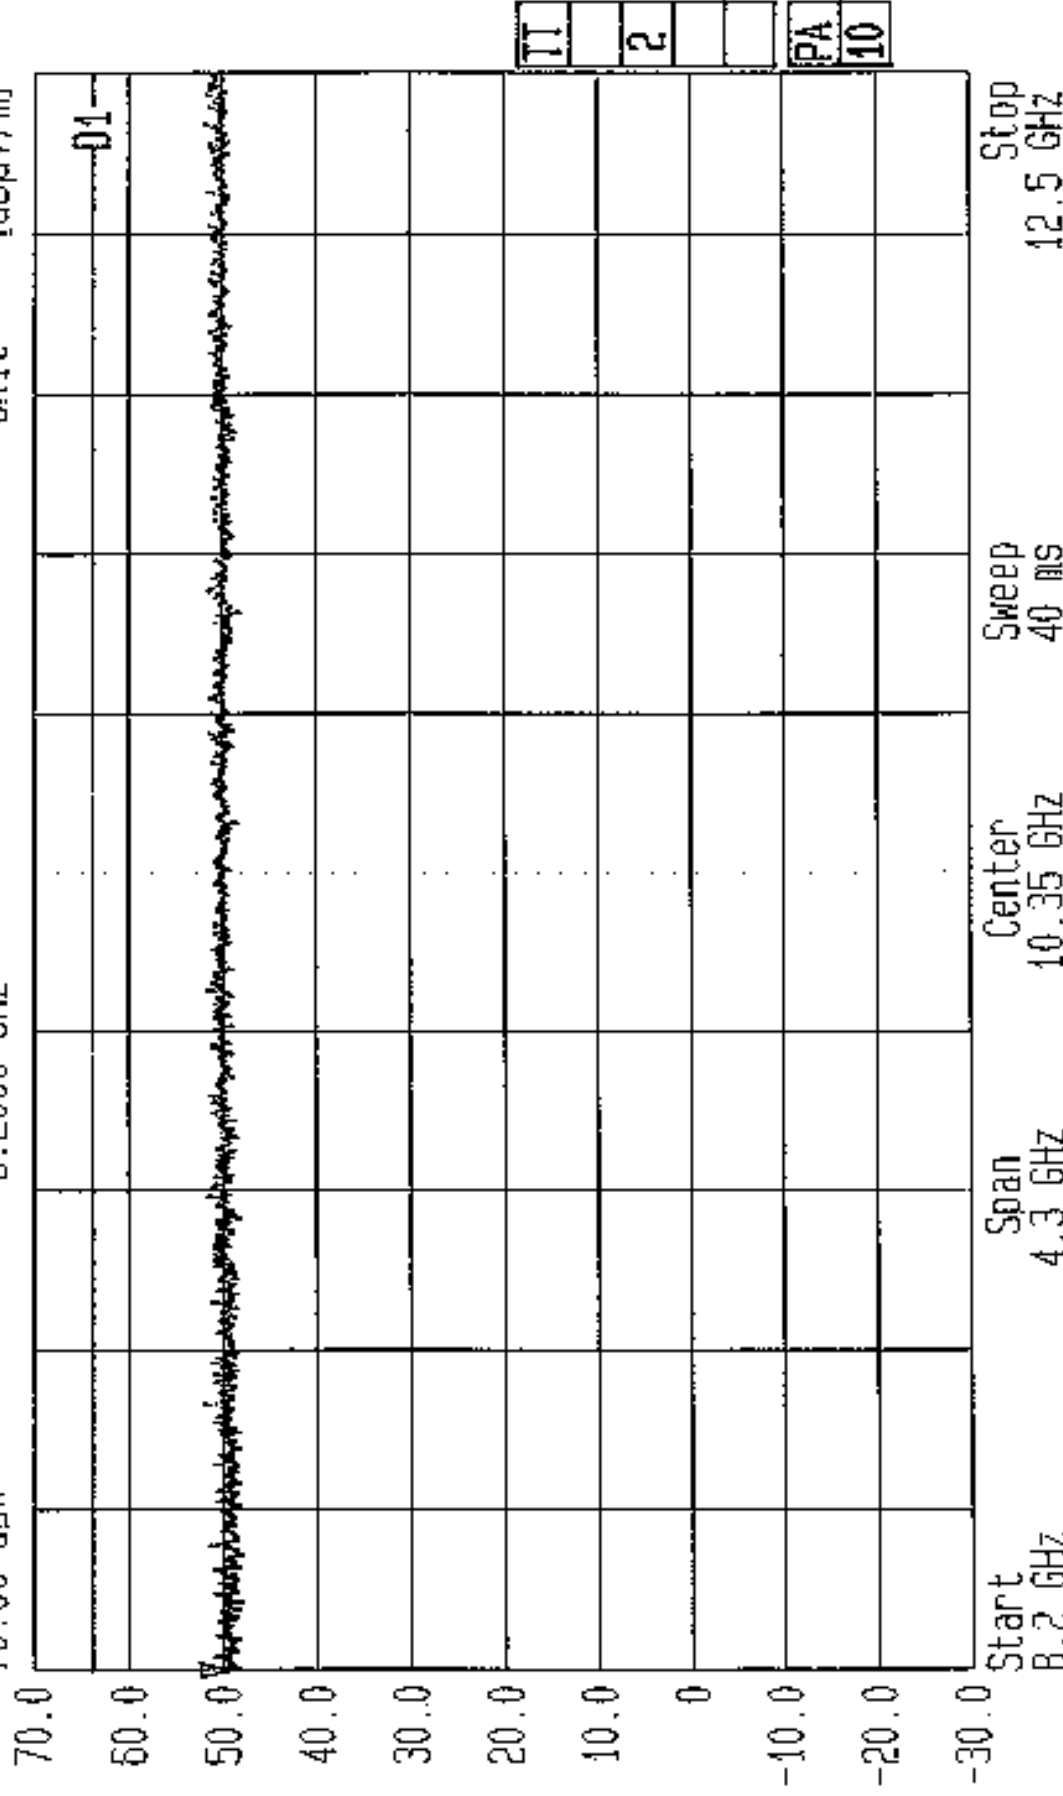

TT
2
PA
10

Radiated. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit.
Limit. FCC Part 15.405 (b). Rx Mode 5.15-5.25 GHz Band Bot Chan GPH/38658/JD04/057



Date 27.Mar.'99 Time 16:35:27

Ref.Lvl

70.00 dBx

Res.Bw

1G.Lvl

CF.Stp

1 MHz [imp]

Off

430.000 MHz

Vid.Bw

RF.Att

Unit

1 MHz

0 dB

[dB μ V/m]

70.0

60.0

50.0

40.0

30.0

20.0

10.0

0

-10.0

-20.0

-30.0

D1

TT

2

PA

10

Start

8.2 GHz

Span

4.3 GHz

Center

10.35 GHz

Sweep

40 ms

Stop


12.5 GHz

Radiated. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit.
Limit. FCC Part 15.405 (b). Rx Mode 5.15-5.25 GHz Band Top Chan 6PH/38658/JD04/058



Date 27.Mar.'99 Time 16:41:41
Ref.Lvl 70.00 dB*
Marker 54.72 dB*
8.7351 GHz

Res.Bw 1 MHz [imp]
TG.Lvl Off
CF.Stp 430.000 MHz
Vid.Bw 1 MHz
RF.Att 0 dB
Unit [dBuV/m]

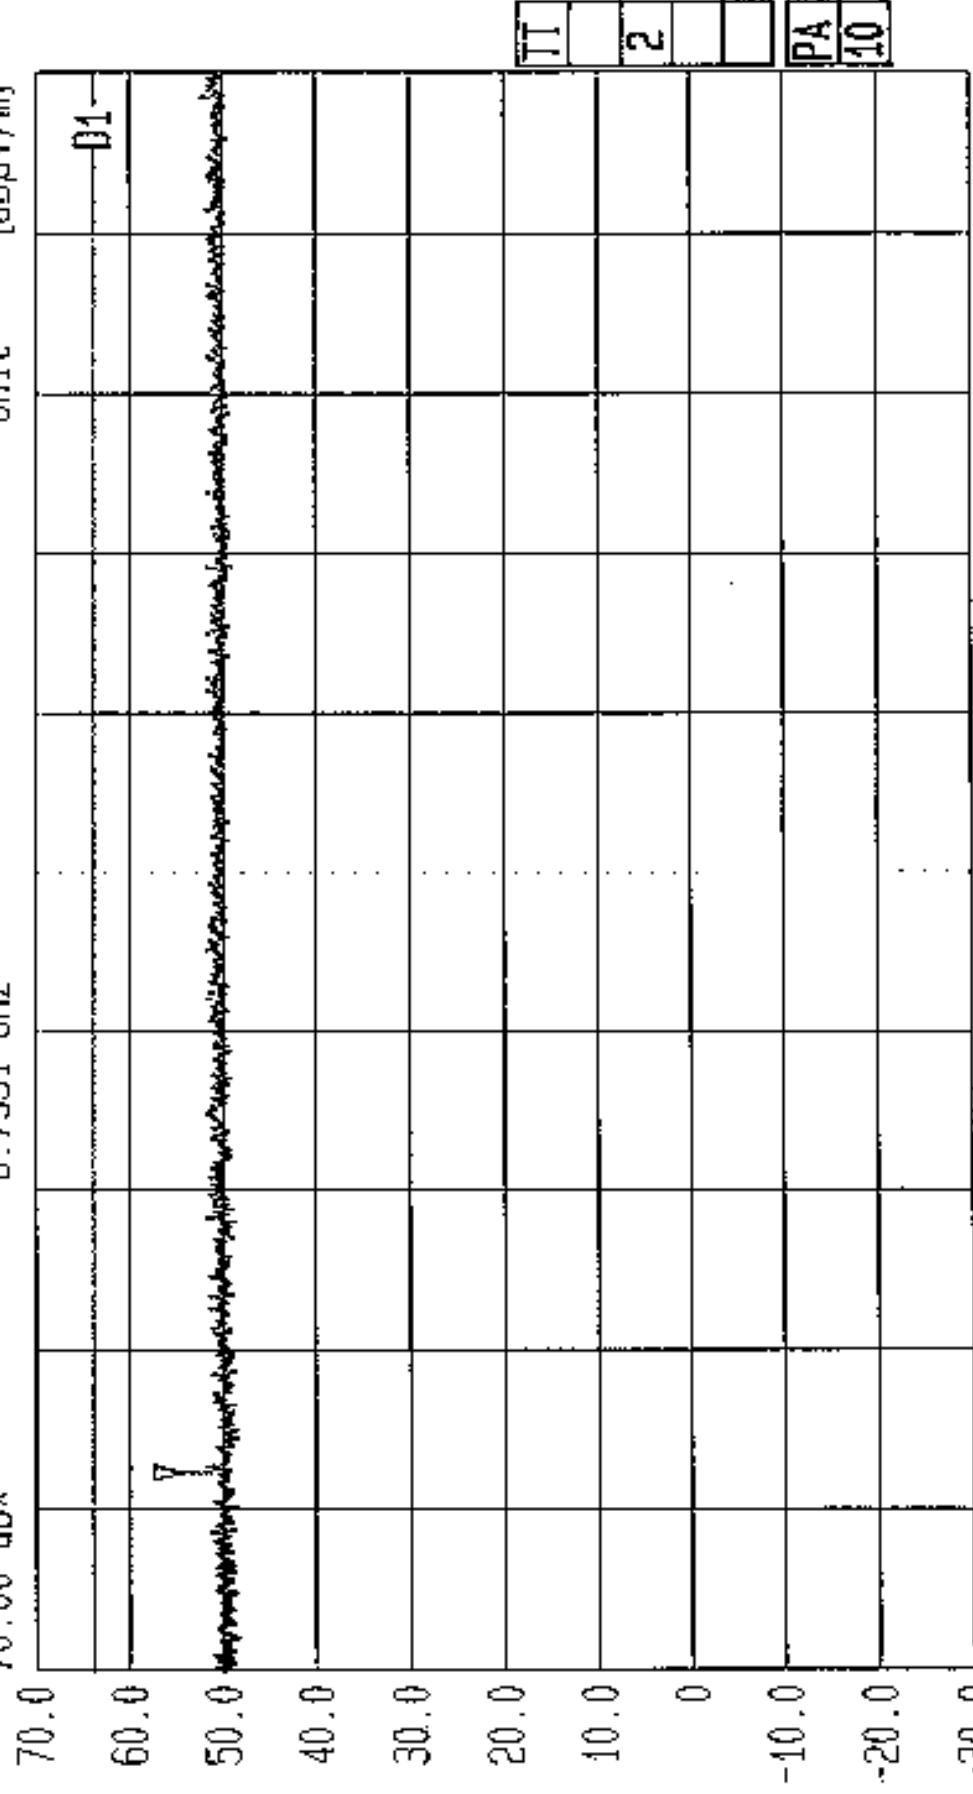


Radiated. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit.
Limit. FCC Part 15.405 (b). Rx Mode 5.25-5.35 GHz Band Bot Chan GPH/38658/JD04/059



Date 27.Mar.'99 Time 17:09:45
Ref.Lvl 70.00 dB*
Marker 52.46 dB*
8.8545 GHz

Res.Bw 1 MHz [imp]
IG.Lvl off
CF.Stp 430.000 MHz
Vid.Bw 1 MHz
AF.Att 0 dB
Unit [dB μ V/m]

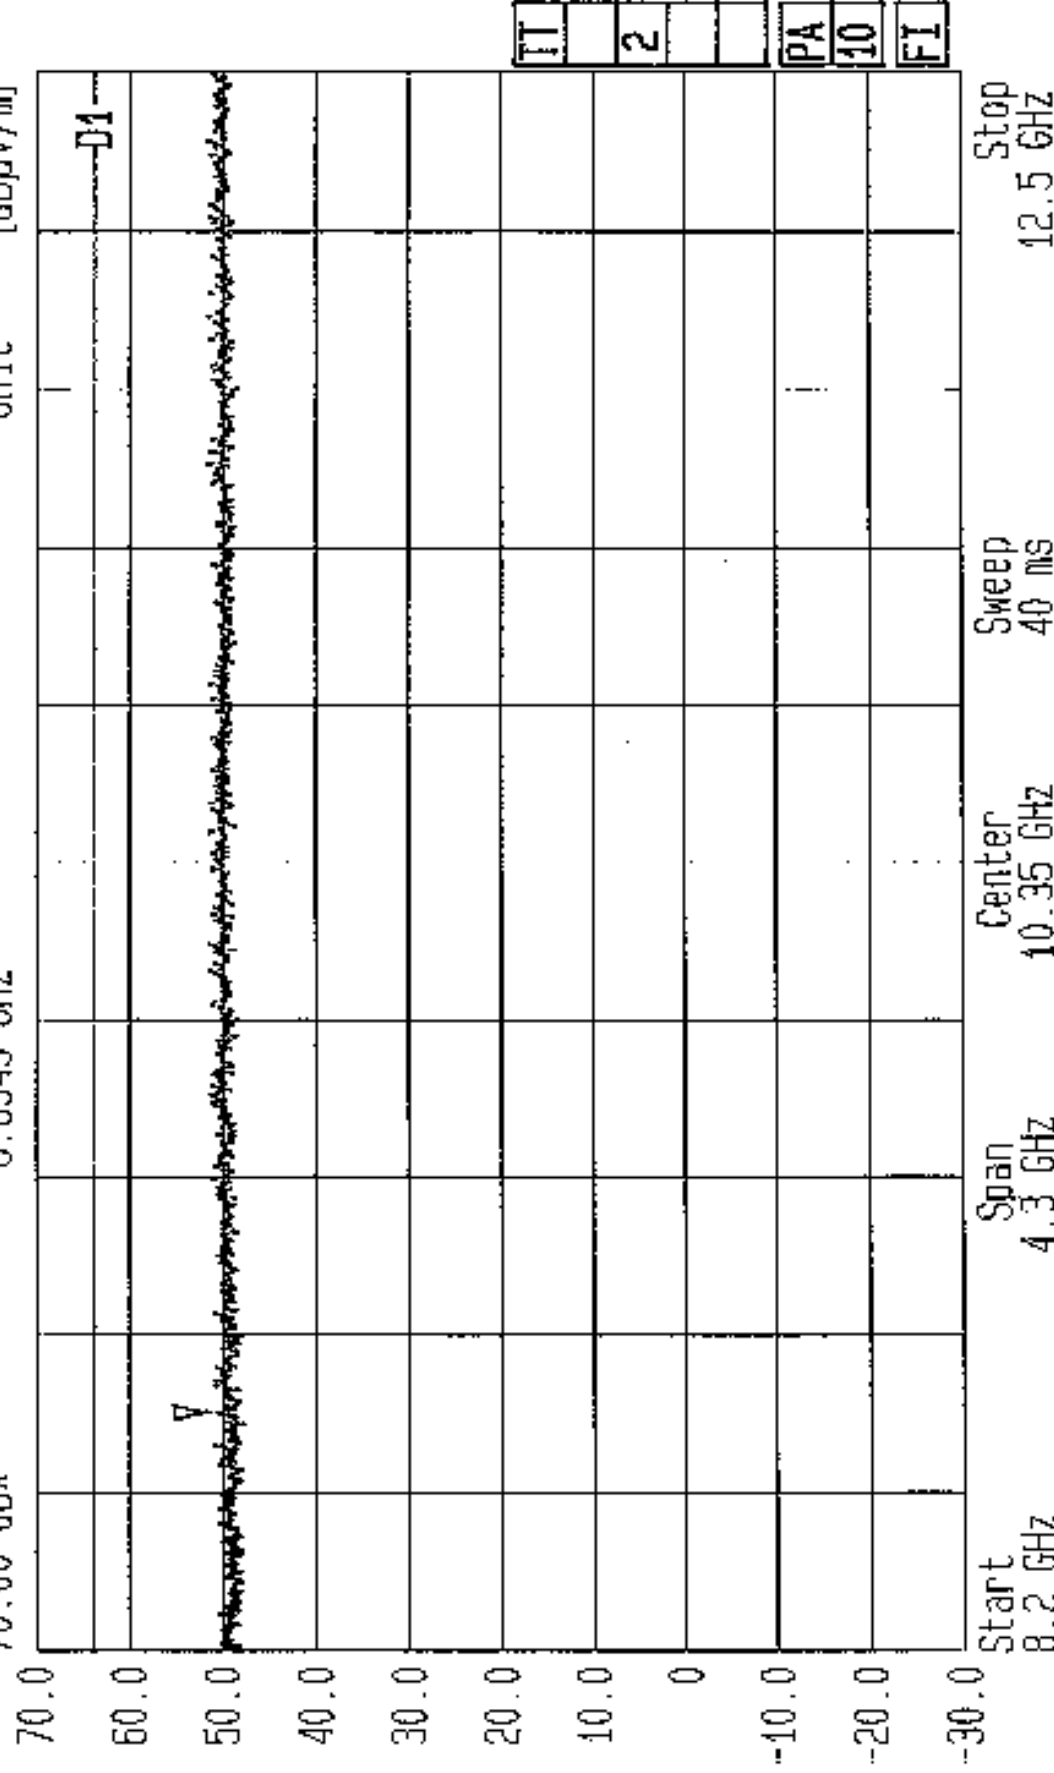

TT
2
PA
10
FI

Radiated, Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit.
Limit. FCC Part 15.405 (b). Rx Mode 5.25-5.35 GHz Band Top Chan GPH/38658/JD04/060



Date 27.Mar.'99 Time 16:59:33

Ref.Lvl

70.00 dB*

Res.Bw

TG.Lvl

CF.Stp

1 MHz [imp]

off

430.000 MHz

Vid.Bw


1 MHz

RF.Att

Unit

0 dB

[dB μ V/m]

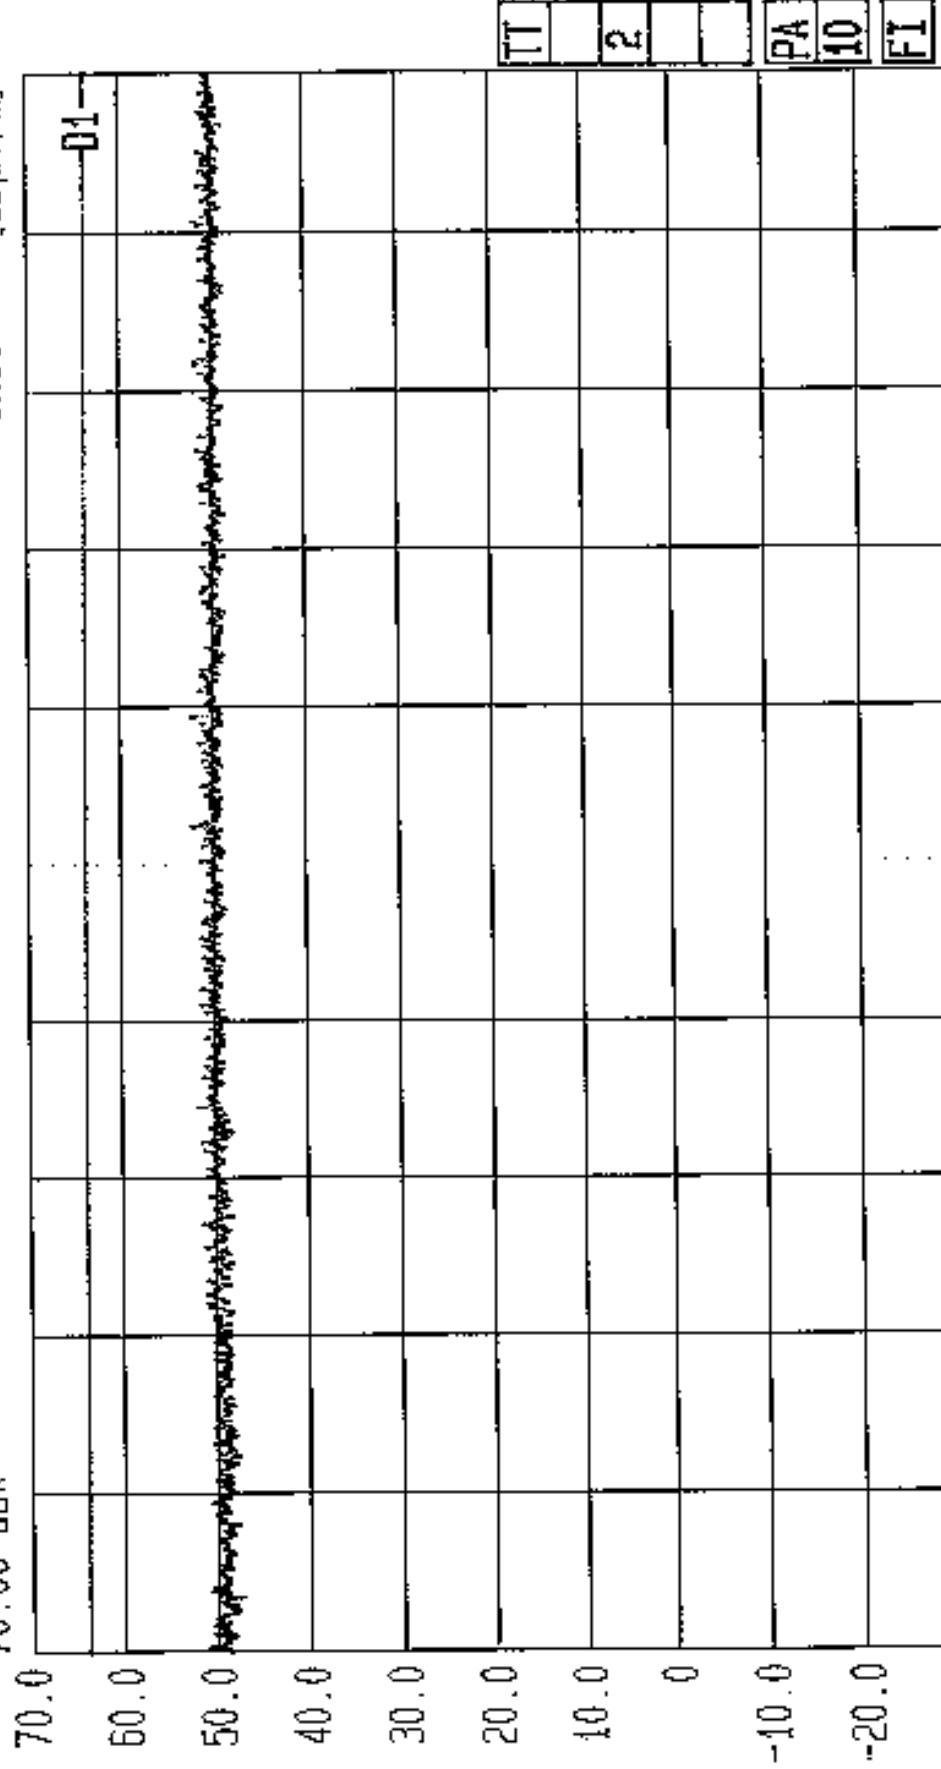

Start

8.2 GHz

Span

4.3 GHz

Center

10.35 GHz

Sweep

40 ms

Stop

12.5 GHz

TT

2

PA

10

FI

Radiated: Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit.
Limit: FCC Part 15.405 (b). Rx Mode 5.725-5.825 GHz Band Bot Chan GPH/38658/J004/061



Date 27.Mar.'99 Time 17:04:38

Ref.Lvl

70.00 dBx

Res.Bw

TG.Lvl

CF.Stp

1 MHz [imp]

Off

430.000 MHz

Vid.Bw

RF.Att

Unit

1 MHz

0 dB

[dBμV/m]

70.0

60.0

50.0

40.0

30.0

20.0

10.0

0

-10.0

-20.0

-30.0

D1

TI

2

PA

10

FI

Start

8.2 GHz

Span

4.3 GHz

Center

10.35 GHz

Sweep

40 ms

Stop

12.5 GHz


Radiated. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit.
Limit. FCC Part 15.405 (b). Rx Mode 5.725-5.825 GHz Band Top Chan GPH/38658/JD04/062



Date 27.Mar.'99 Time 17:15:08
Ref.Lvl 70.00 dBx
Marker 59.09 dBx
16.5883 GHz

Res.BW 1 MHz [imp]
1 MHz [imp]
Vid.BW 1 MHz
1G.Lvl off
550.000 MHz
AF.Attr 0 dB
Unit [dBμV/m]

70.0
60.0
50.0
40.0
30.0
20.0
10.0
0
-10.0
-20.0
-30.0

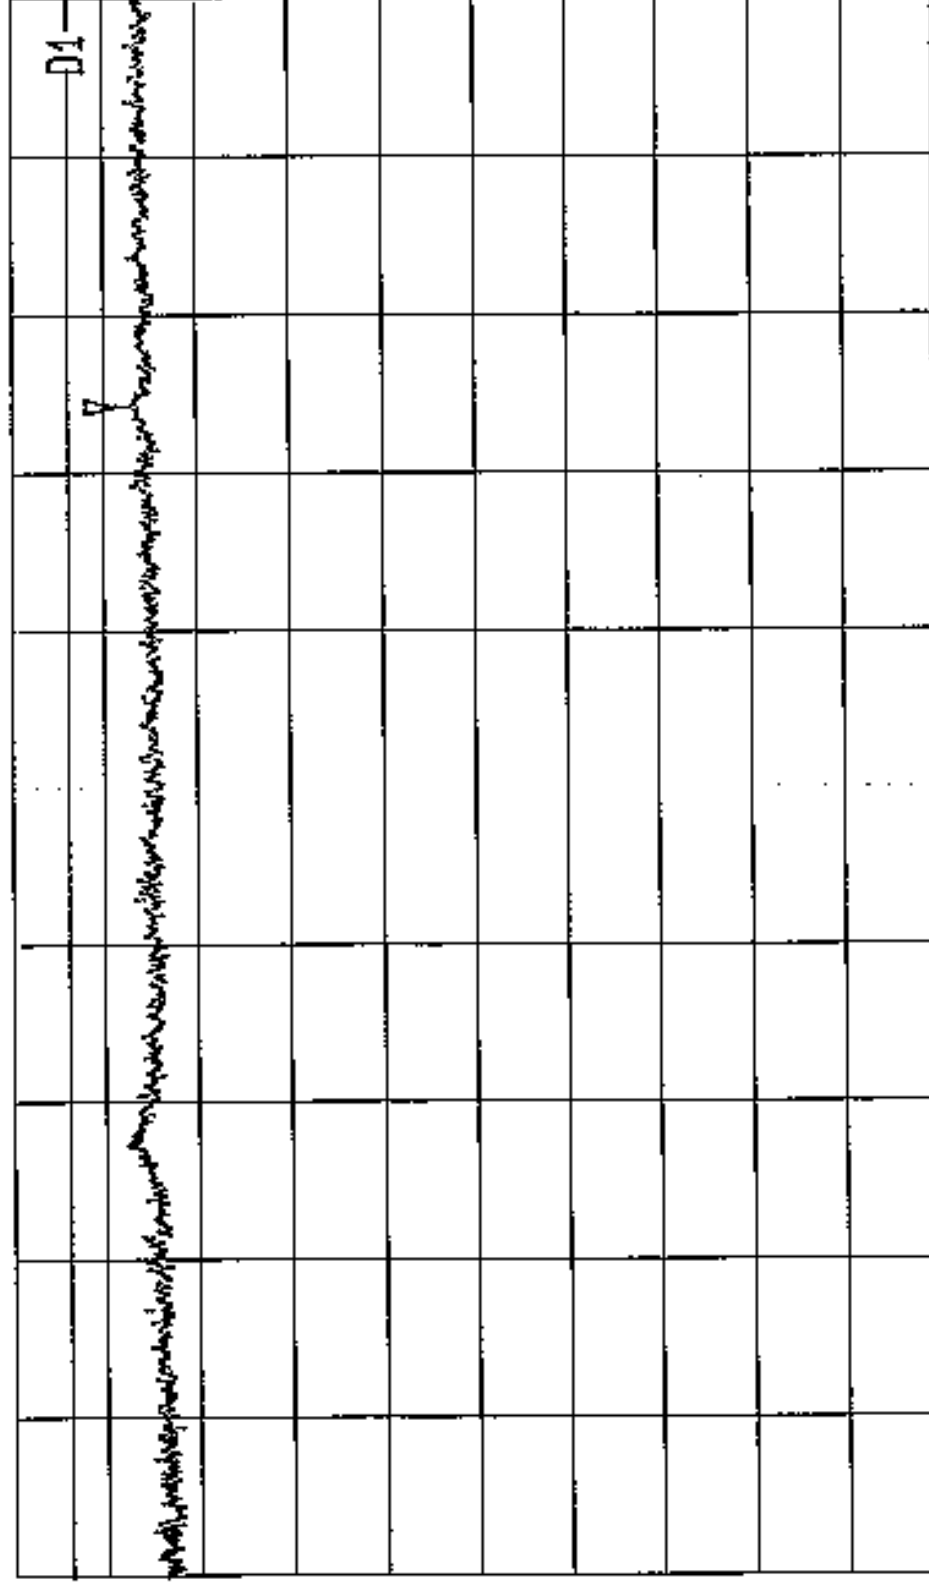

Start 12.5 GHz
Span 5.5 GHz
Center 15.25 GHz
Sweep 40 ms
Stop 18 GHz

Radiated. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit.
Limit. FCC Part 15.405 (b). Rx Mode 5.15-5.25 GHz Band Bot Chan 6PH/38658/JD04/063

TT
2
PA
10




Date 27.Mar.'99 Time 17:23:22

Ref.Lvl
70.00 dB*

Res.BW 1 MHz [imp]
1G.Lvl Off
CF.Stp 550.000 MHz
Vid.BW 1 MHz
RF.Att 0 dB
Unit [dB μ V/m]

70.0
60.0
50.0
40.0
30.0
20.0
10.0
0
-10.0
-20.0
-30.0

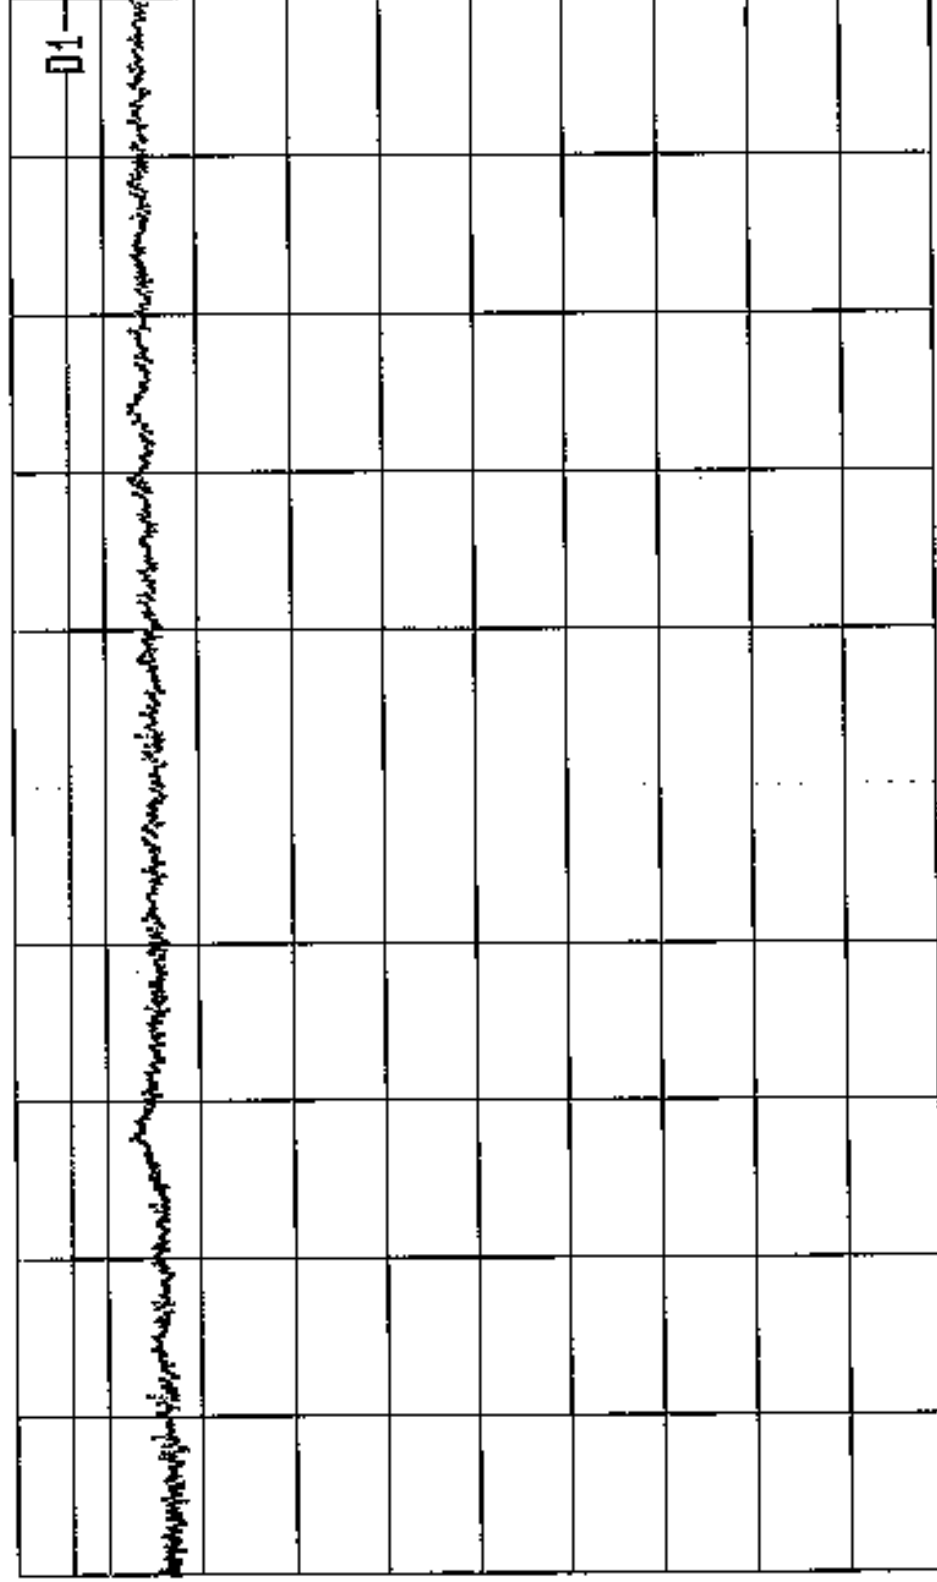

TT
2
PA
10

Start 12.5 GHz
Span 5.5 GHz
Center 15.25 GHz
Sweep 40 ms
Stop 18 GHz
Radiated. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit.
Limit. FCC Part 15.405 (b). Rx Mode 5.15-5.25 GHz Band Top Chan GPH/38658/J004/064



Date 27.Mar.'99 Time 17:28:37

Ref.Lvl

70.00 dB*

Res.Bw 1 MHz [imp]


Vid.Bw 1 MHz

off

550.000 MHz

RF Att 0 dB

Unit [dBuV/m]

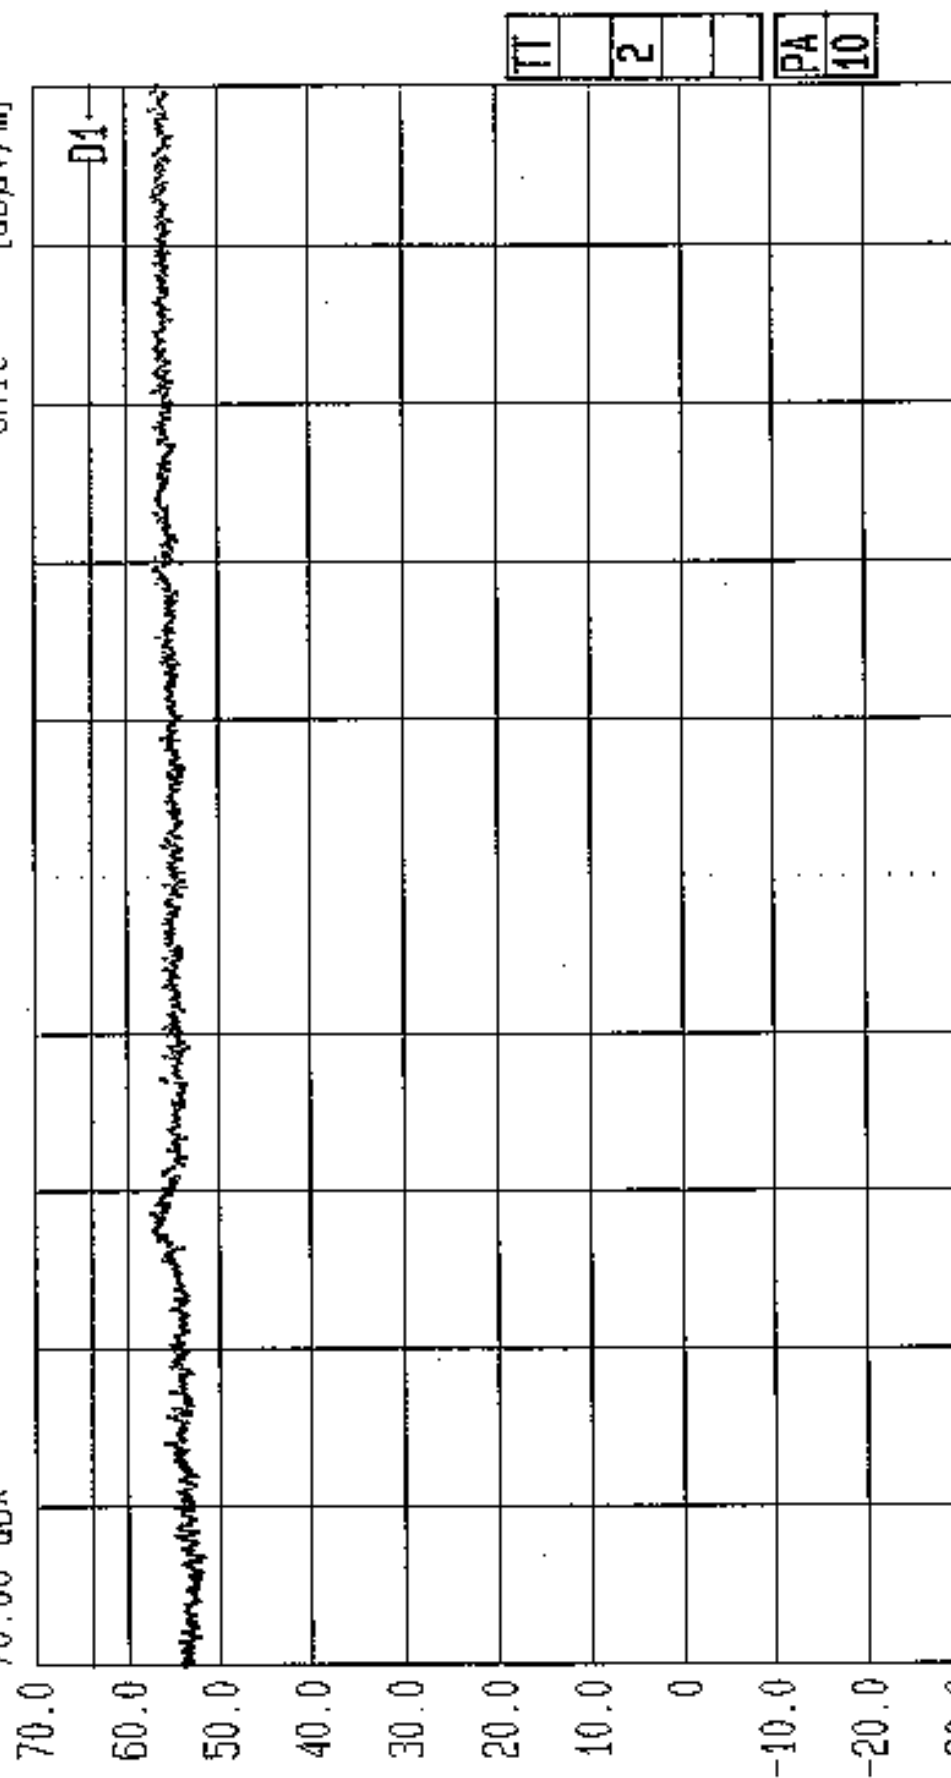

Start 12.5 GHz Center 15.25 GHz Sweep 40 ms Stop 18 GHz

Radiated. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit.
Limit: FCC Part 15.405 (b). Rx Mode 5.25-5.35 GHz Band Bot Chan GPH/3865B/JD04/065



Date 27.Mar.'99 Time 17:34:03

Ref.Lvl

70.00 dBx

Res.BW

1 MHz

off

CF.Stp

550.000 MHz

Vid.Bw

1 MHz

RF.Att

0 dB

Unit

(dBμV/m)

70.0

60.0

50.0

40.0

30.0

20.0


10.0

0

-10.0

-20.0

-30.0

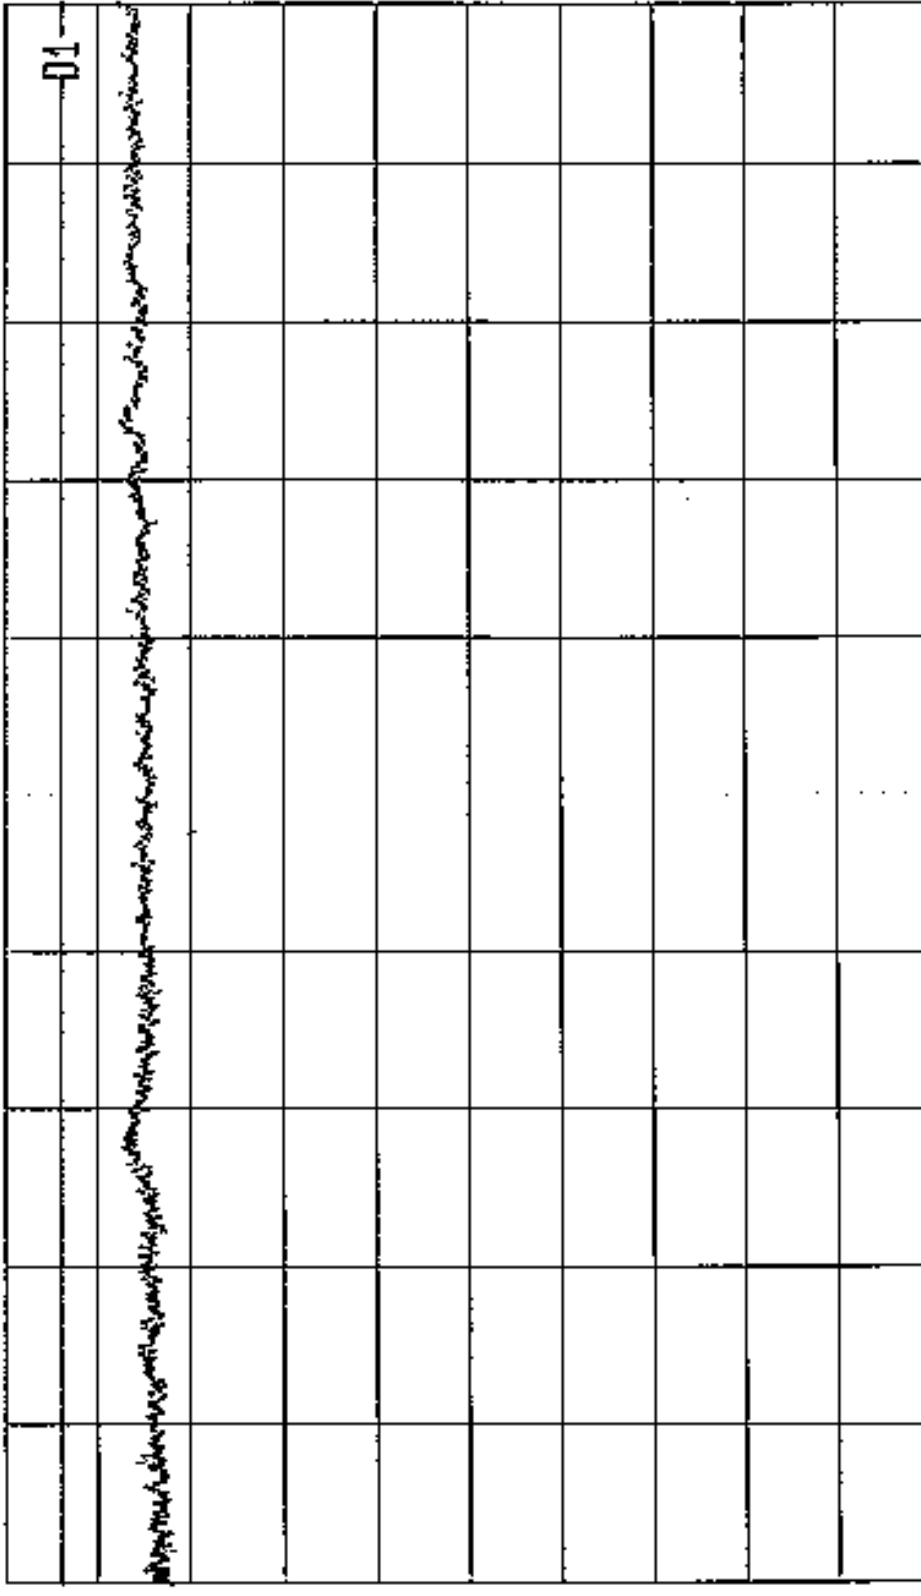

IT
2
PA
10

Start

12.5 GHz

Span

5.5 GHz

Center

15.25 GHz

Sweep

40 ms

Stop

18 GHz

Radiated. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit.
Limit. FCC Part 15.405 (b). Rx Mode 5.25-5.35 GHz Band Top Chan GPH/38658/JD04/066




Date 27-Mar-'99 Time 17:39:31

Ref. Lvl
70.00 dB*Res. Bw
IG. Lvl
CF. Stp

1 MHz [imp]
off
550.000 MHz

Vid.Bw	1 MHz
RF.Att	0 dB
Unit	[dBuV/m]

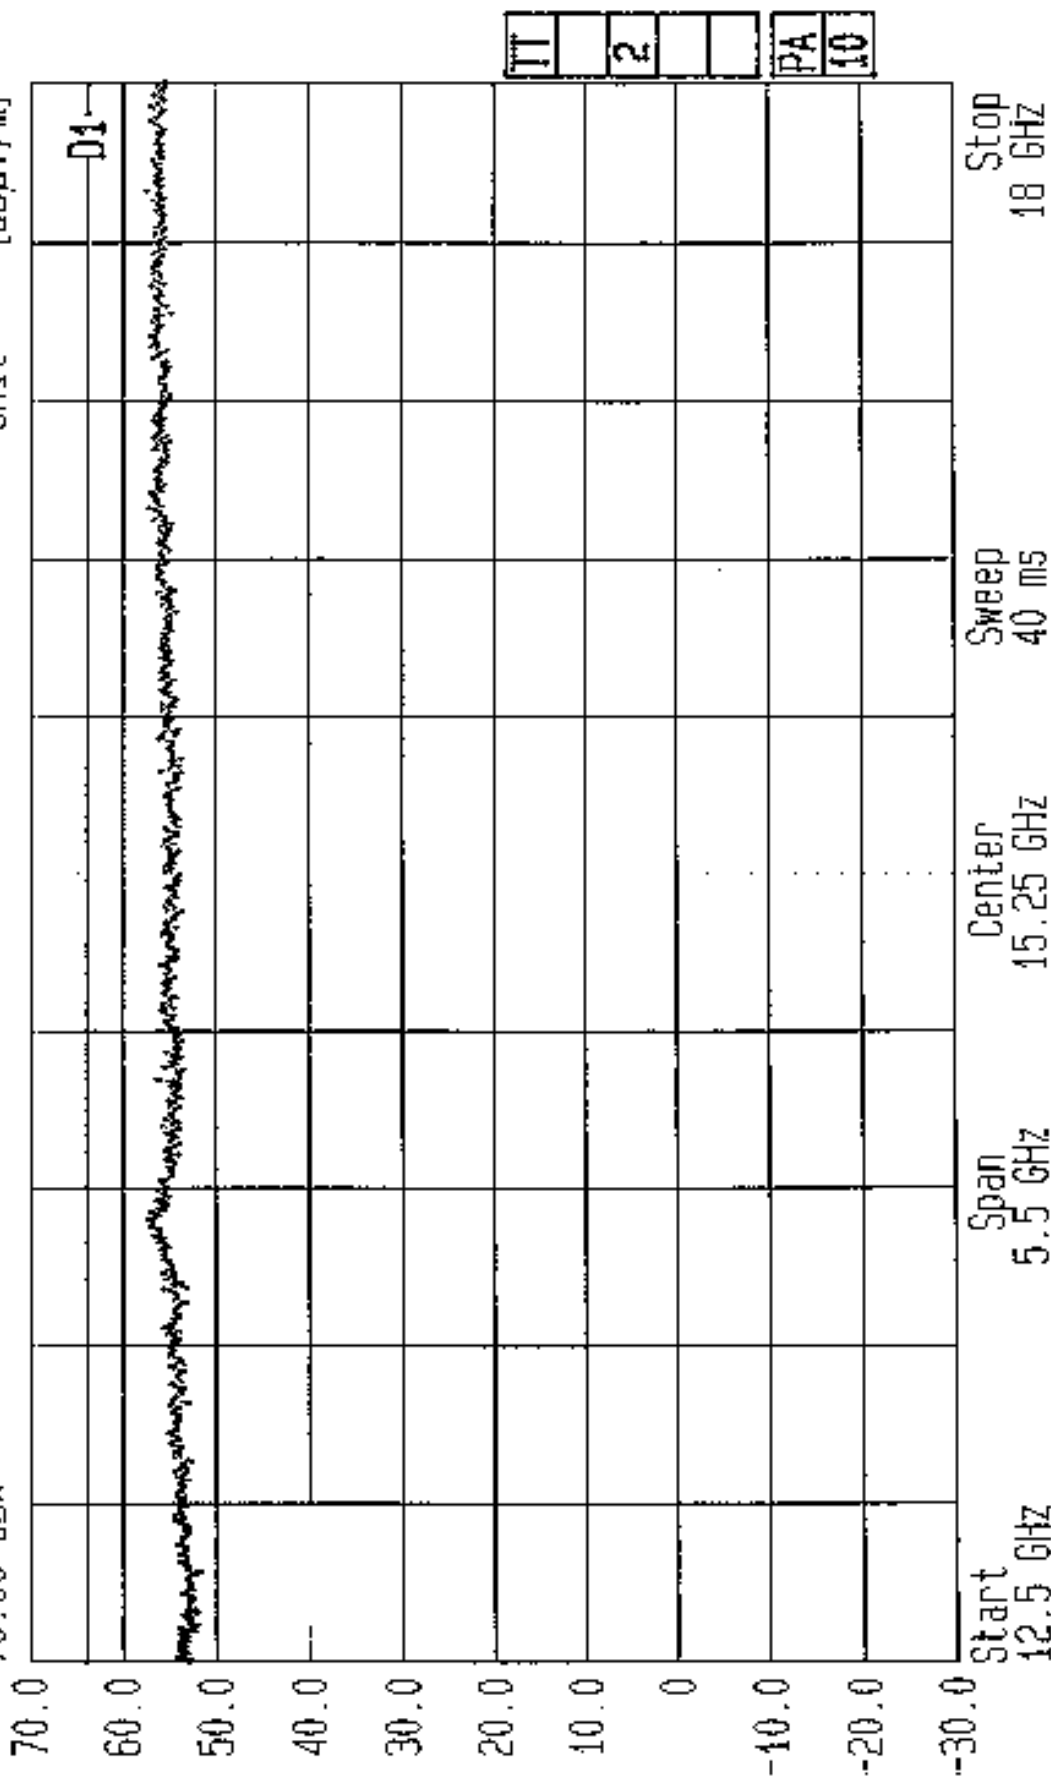

Radiated. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit.
Limit. FCC Part 15.405 (b). Rx Mode 5.725-5.825 GHz Band Bot Chan 6PH/38658/JD04/067



Date 27.Mar.'99 Time 17:48:21

Ref.Lvl

70.00 dBx

Res.Bw

TG.Lvl

CF.Stp

1 MHz [imp]

Off

550.000 MHz

Vid.Bw

RF.Att

Unit

1 MHz

0 dB

[dBuV/m]

70.0

60.0

50.0

40.0

30.0

20.0


10.0

0

-10.0

-20.0

-30.0

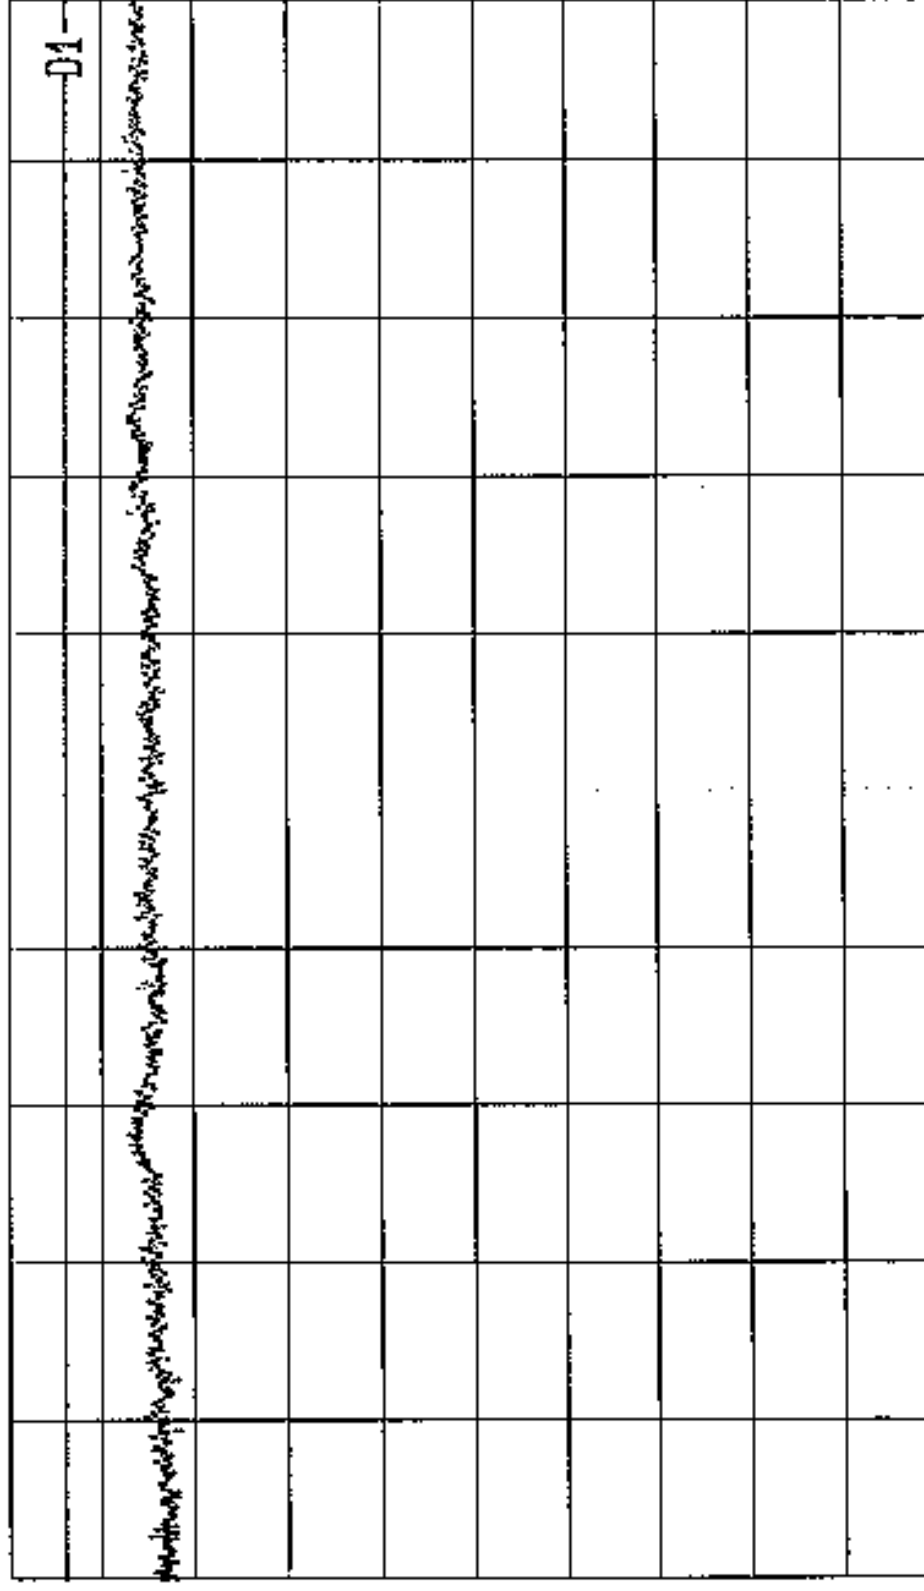

Start

12.5 GHz

Span

5.5 GHz

Center

15.25 GHz

Sweep

40 ms

Stop

18 GHz

PA
10

Radiated. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit.
Limit. FCC Part 15.405 (b). Rx Mode 5.725-5.825 GHz Band Top Chan GPH/38658/JD04/068



Date 27.Mar.'99 Time 17:54:48

Ref.Lvl

70.00 dB*

1 MHz

Vid.Bw

1 MHz [imp]

Off

RF.Att

800.000 MHz

0 dB

Unit

[dBμV/m]

70.0

60.0

50.0

40.0

30.0

20.0


10.0

0

-10.0

-20.0

-30.0

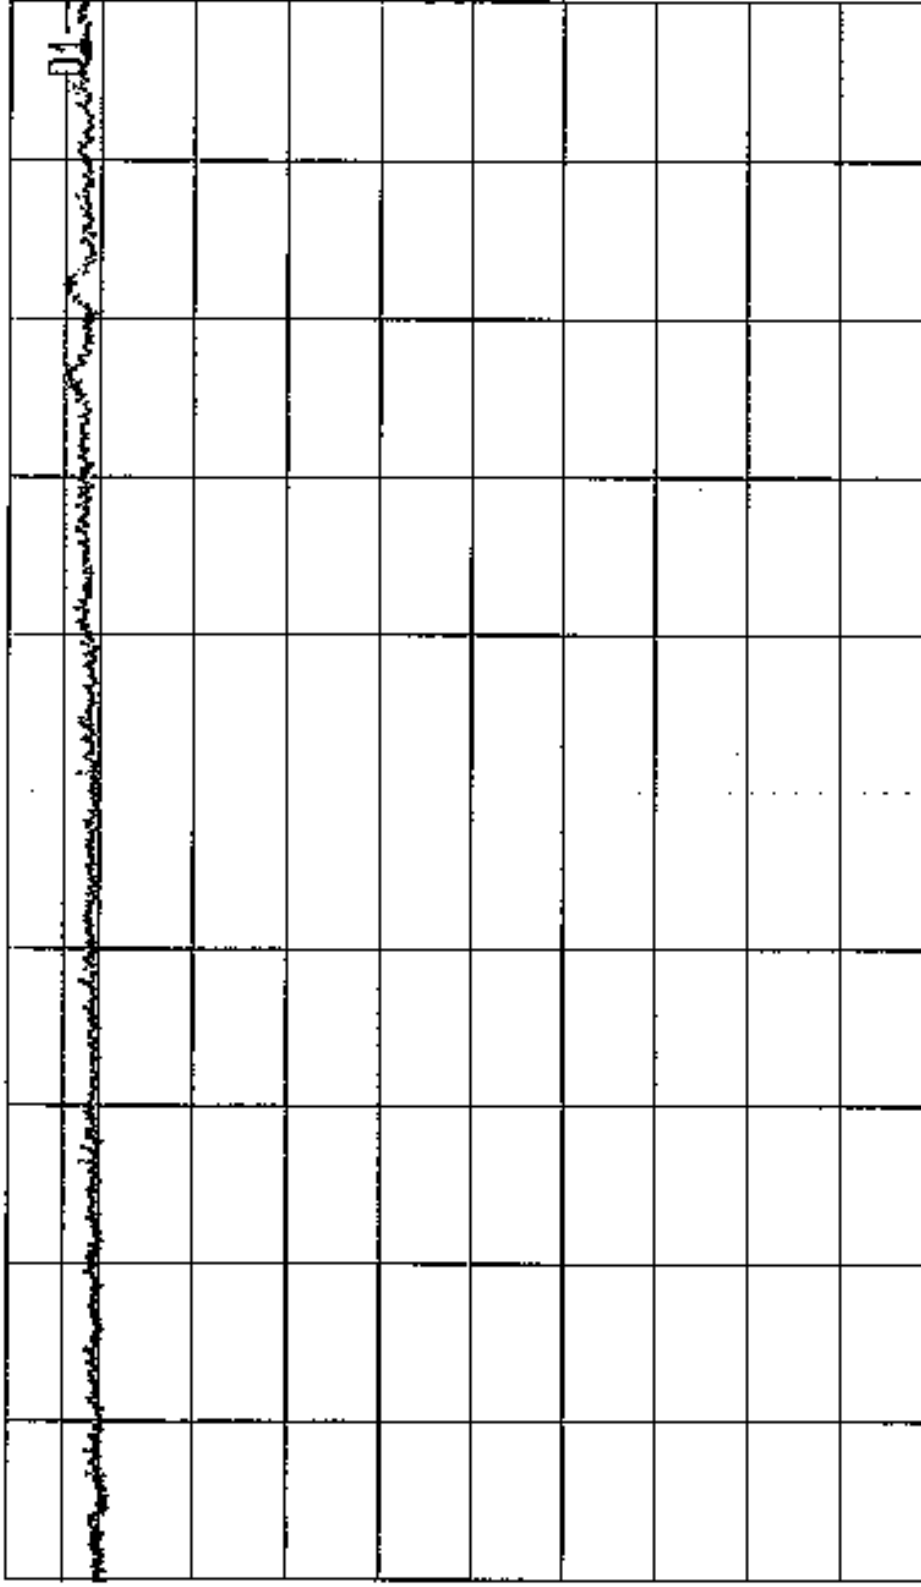

TT

2

PA

10

Start

18 GHz

Span

8 GHz

Center

22 GHz

Sweep

60 ms

Stop

26 GHz

Radiated, Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit.
Limit. FCC Part 15.405 (b). Rx Mode 5.15-5.25 GHz Band Bot Chan GPH/38658/JD04/069



Date 27.Mar.'99 Time 17:59:49

Ref.Lvl
70.00 dBx

Res.BW 1 MHz [imp] Vid.Bw 1 MHz
TG.Lvl off
CF.Stp 800.000 MHz RF.Att 0 dB
Unit [dBμV/m]

70.0

60.0

50.0

40.0

30.0

20.0


10.0

0

-10.0

-20.0

-30.0

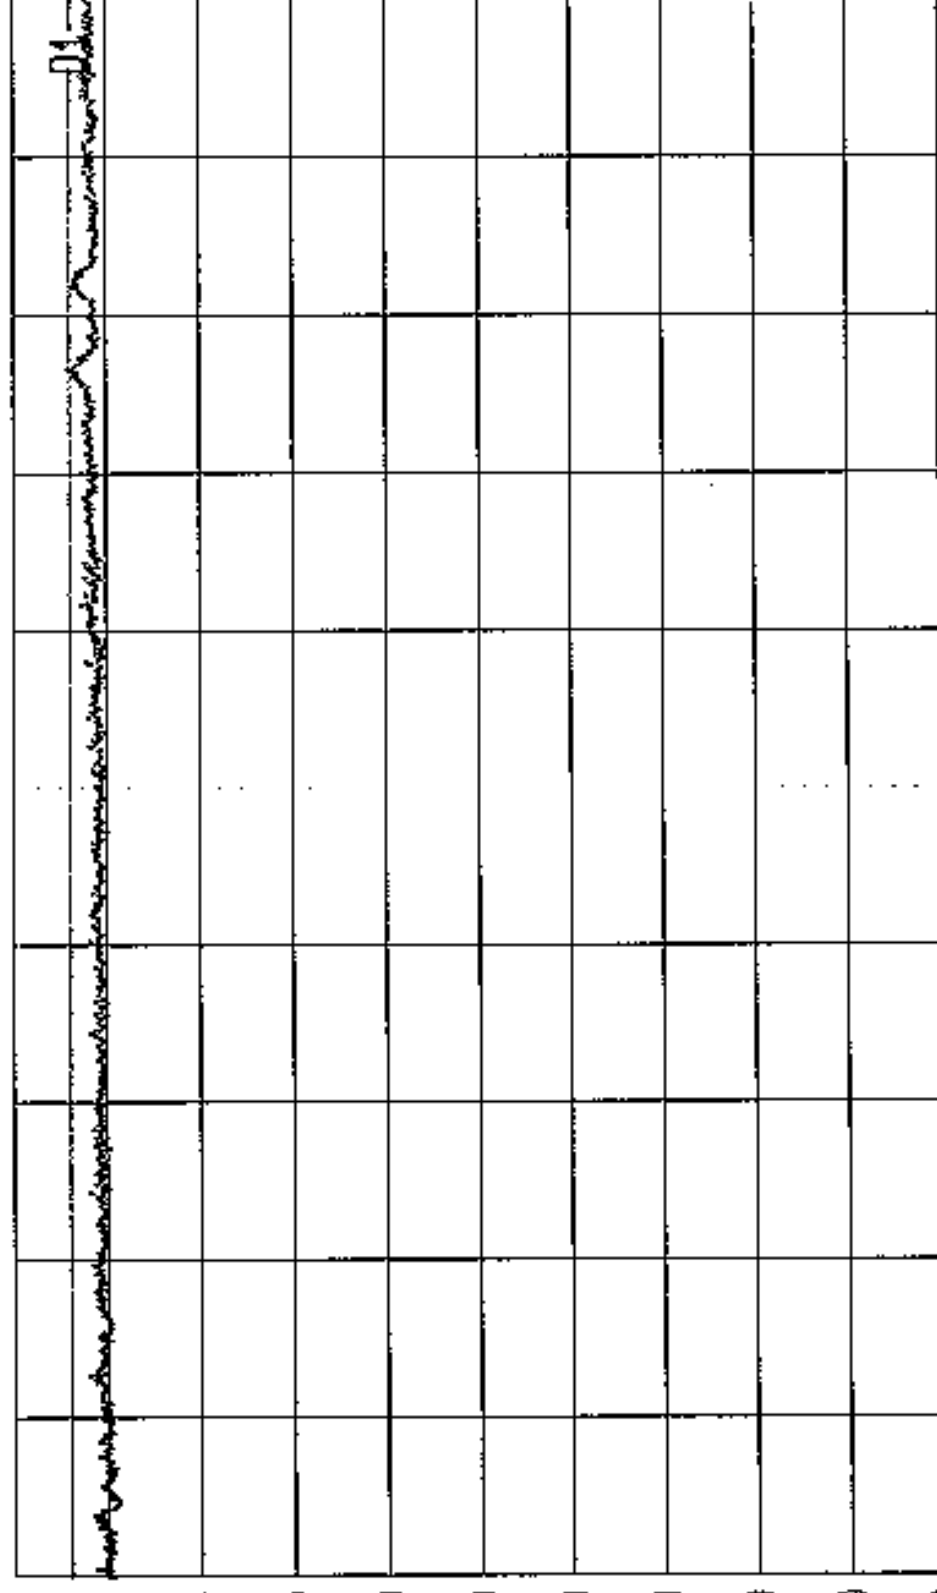

Start
18 GHz

Span
8 GHz

Center
22 GHz

Sweep
60 ms

Stop
26 GHz

Radiated. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit.
Limit. FCC Part 15.405 (b). Rx Mode 5.15-5.25 GHz Band Top Chan GPH/38658/JD04/070

11

2

PA

10



Date 27.Mar.'99 Time 18:04:49

Ref.Lvl
70.00 dB*

Res.Bw 1 MHz [imp]
TG.Lvl off
CF.Stp 800.000 MHz
Vid.Bw 1 MHz
RF.Att 0 dB
Unit [dBμV/m]

70.0

50.0

50.0

40.0

30.0

20.0


10.0

0

-10.0

-20.0

-30.0

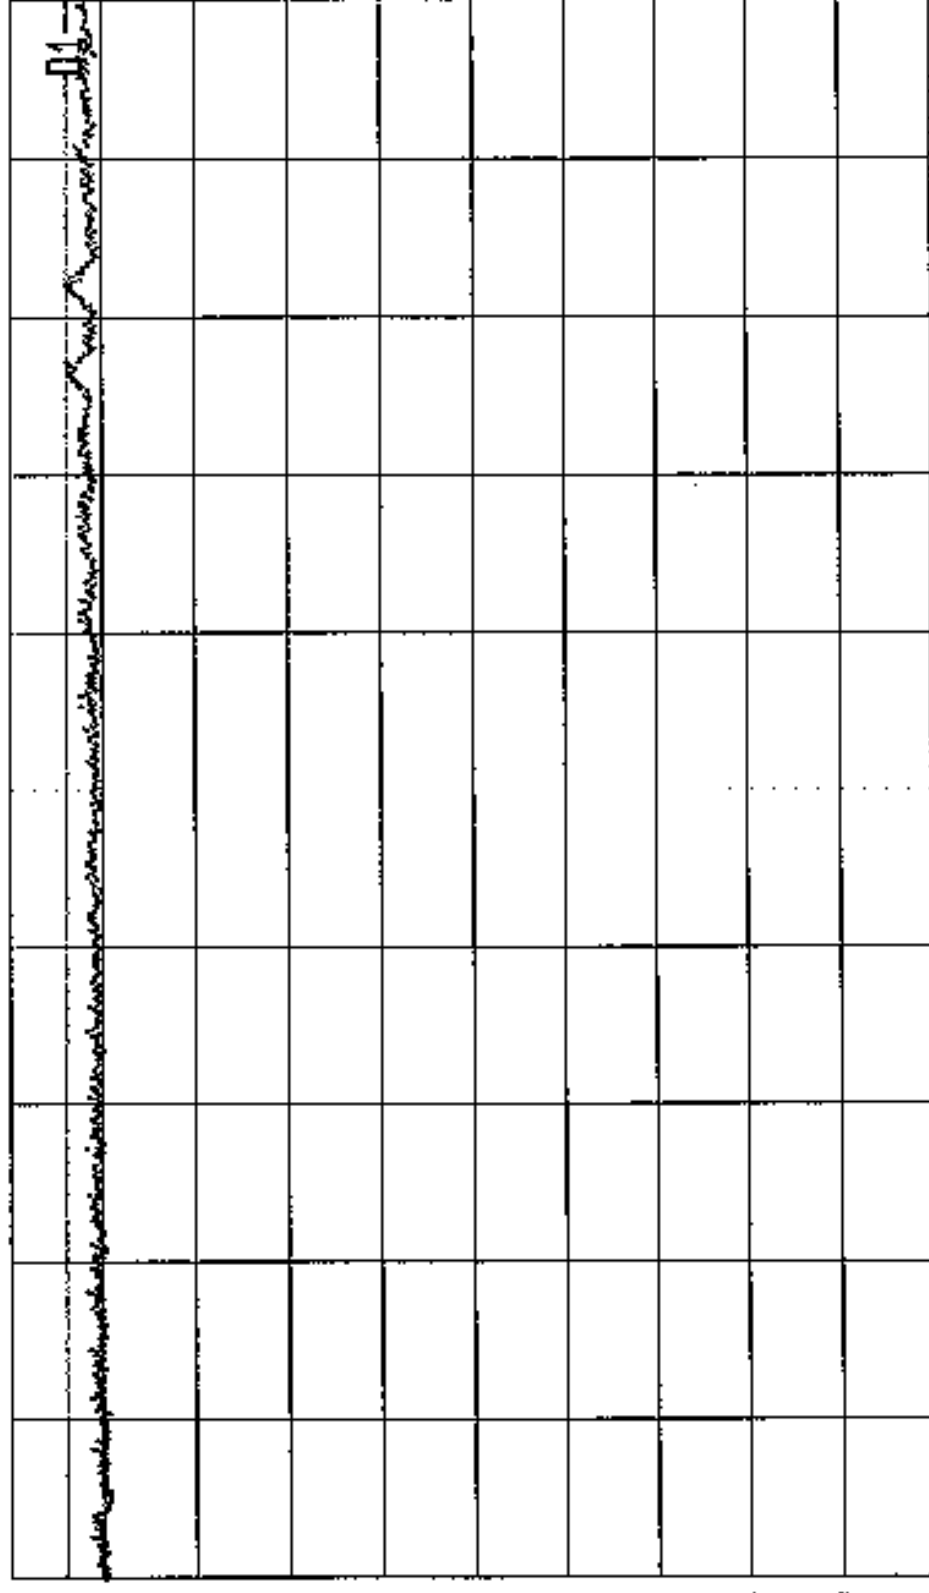

TT

2

PA

10

Start 18 GHz
Span 8 GHz
Center 22 GHz
Sweep 60 ms
Stop 26 GHz

Radiated. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit.
Limit. FCC Part 15.405 (b). Rx Mode 5.25-5.35 GHz Band Bot Chan GPH/38658/JD04/071



Date 27.Mar.'99 Time 18:09:58

Ref.Lvl

70.00 dB*

Res.BW 1 MHz [imp]

Off

800.000 MHz

RF.Att

Unit

[dBμV/m]

Vid.BW

1 MHz

70.0

60.0

50.0

40.0

30.0

20.0

10.0

0

-10.0

-20.0

-30.0

Start

18 GHz

Span

8 GHz

Center

22 GHz

Sweep

60 ms

Stop

26 GHz

Radiated. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit.
Limit. FCC Part 15.405 (b). Rx Mode 5.25-5.35 GHz Band Top Chan 6PH/38658/JD04/072

TT

2

PA

10



Date 27.Mar.'99 Time 18:15:04

Ref.Lvl
70.00 dBx

Res.BW 1 MHz [imp] Vid.BW 1 MHz
TQ.Lvl Off
CF.Stp 800.000 MHz RF.Att 0 dB
Unit [dBuV/m]

70.0

60.0

50.0

40.0

30.0

20.0

10.0

0

-10.0

-20.0

-30.0

Start

18 GHz

Span

8 GHz

Center

22 GHz

Sweep

50 ms

Stop

26 GHz

Radiated. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit.
Limit: FCC Part 15.405 (b). Rx Mode 5.725-5.825 GHz Band 30t Chan 6PH/38658/JD04/073

TT

2

PA


10



Date 27.Mar.'99 Time 18:20:13

Ref.Lvl
70.00 dBx

Res.Bw 1 MHz [imp] Vid.Bw 1 MHz
IG.Lvl Off
CF.Stp 800.000 MHz RF.Att 0 dB
Unit [dB μ V/m]

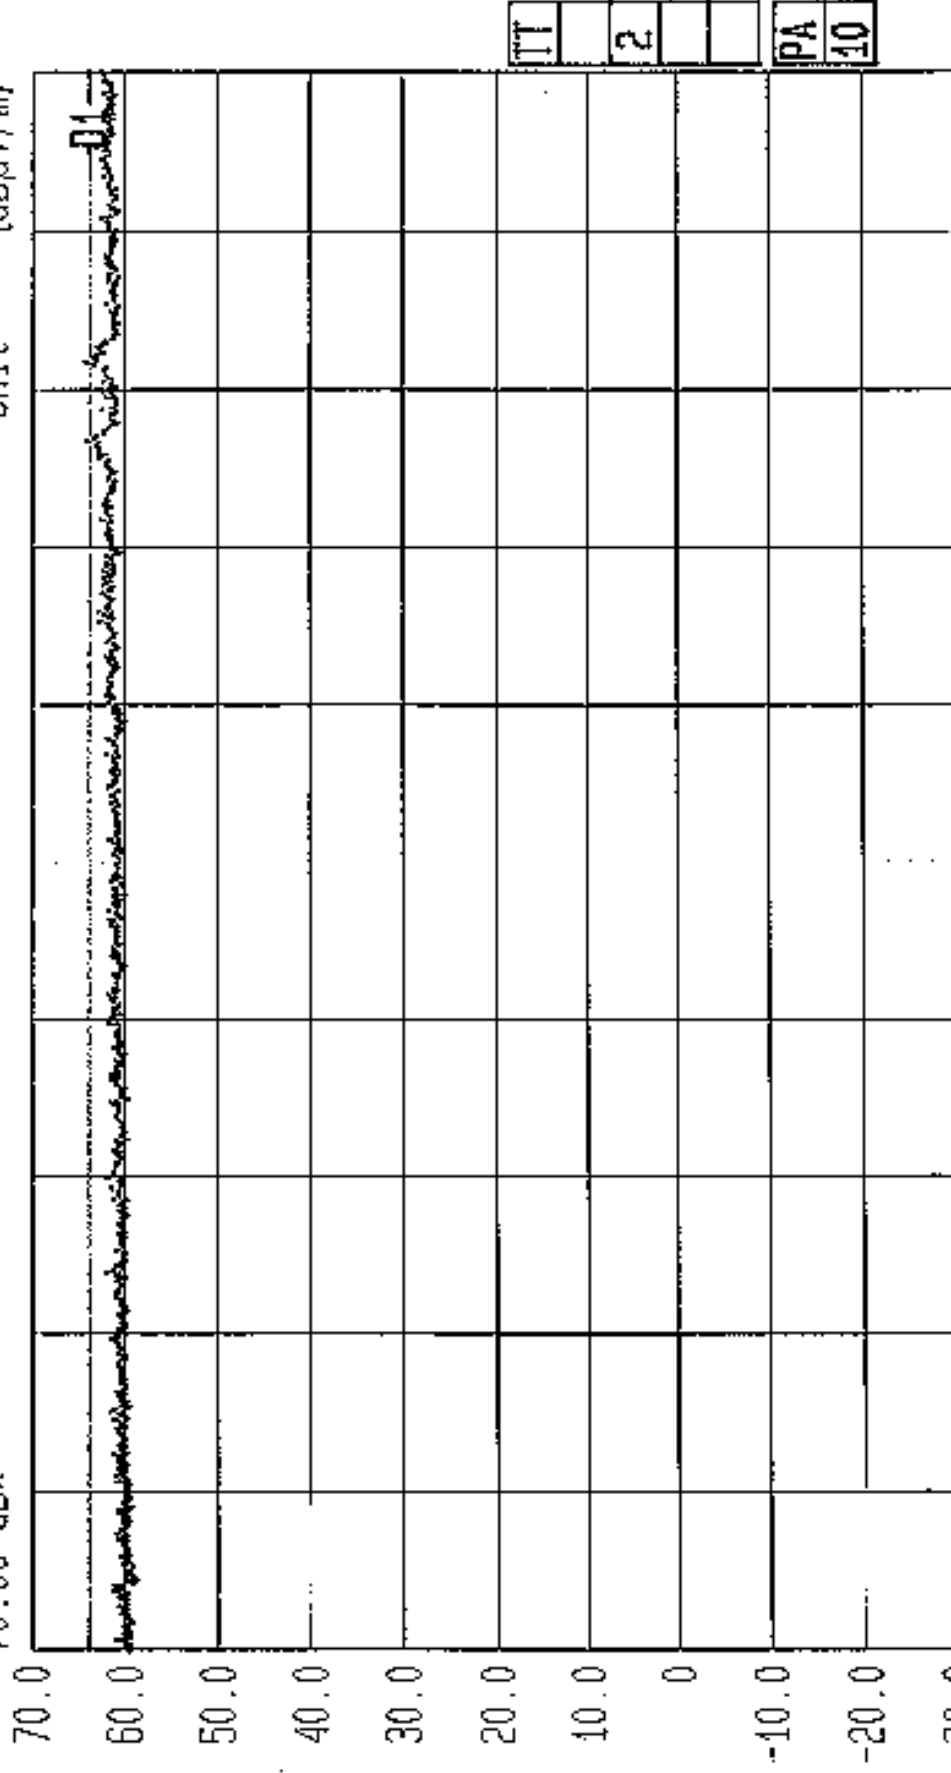


Radiated. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit.
Limit. FCC Part 15.405 (b). Rx Mode 5.725-5.825 GHz Band Top Chan GPH/38658/JD04/074

LVLOFF

Date 29-Mar-'99 Time 09:17:19
 Ref.Lvl Marker 15.41 dBm
 24.50 dBm 5.16999 GHz

Res.Bw 1.0 MHz [3dB]
 T6.Lvl off
 CF.Stp 5.000 MHz
 Vid.Bw 1 MHz
 RF.Att 0 dB
 Unit [dBm]

F1 5.16165866571 GHz D1 17.00 dBm
 F2 5.17860311007 GHz D2 -10.59 dBm
 F2-F1 -16.94444436 MHz D1-D2 -27.59 dB

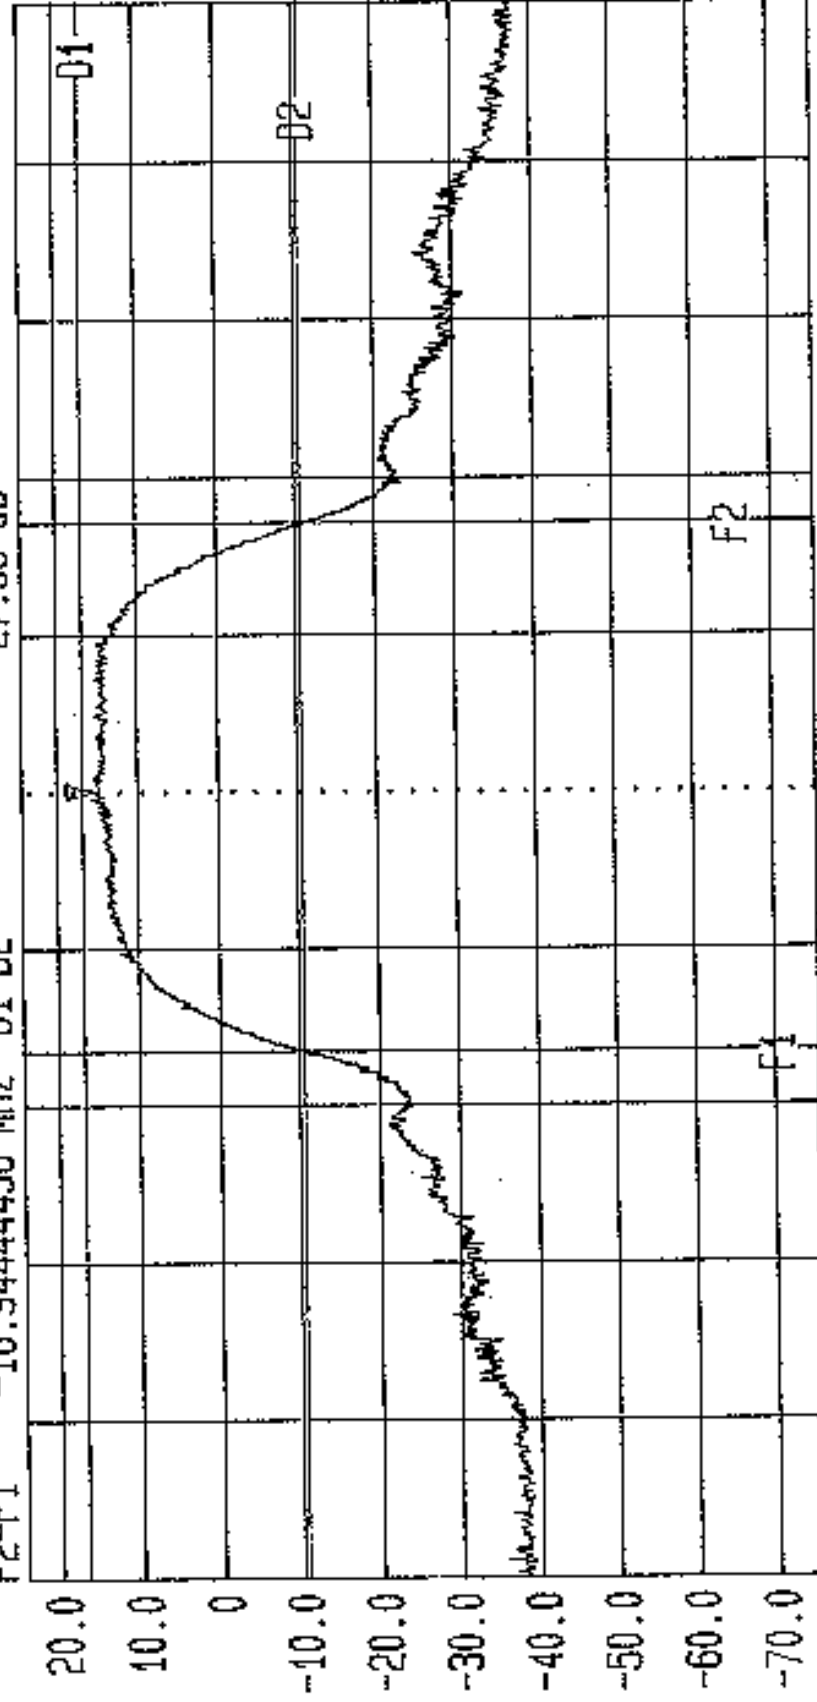

Start 5.14499 GHz Span 50 MHz Center 5.16999 GHz Sweep Stop 5.19499 GHz
 Radiated, Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit...
 Limit: D1: 17dBm. FCC Part 15.407(a) TX: 5.15-5.25 GHz. Bott Chan. GPH/3865B/JD04/075

LVLOFF

Date 29.Mar.'99 Time 09:24:09

Ref.Lvl Marker 14.35 dBm

24.50 dBm 5.17026 GHz

F1 5.16165866571 GHz D1

F2 5.17860311007 GHz D2

F2-F1 -16.94444436 MHz D1-D2

Res.Bw 1.0 MHz [3dB]


TG.Lvl Off

CF.Stp 5.000 MHz

Vid.Bw 1 MHz

RF.Att 0 dB

Unit [dBm]

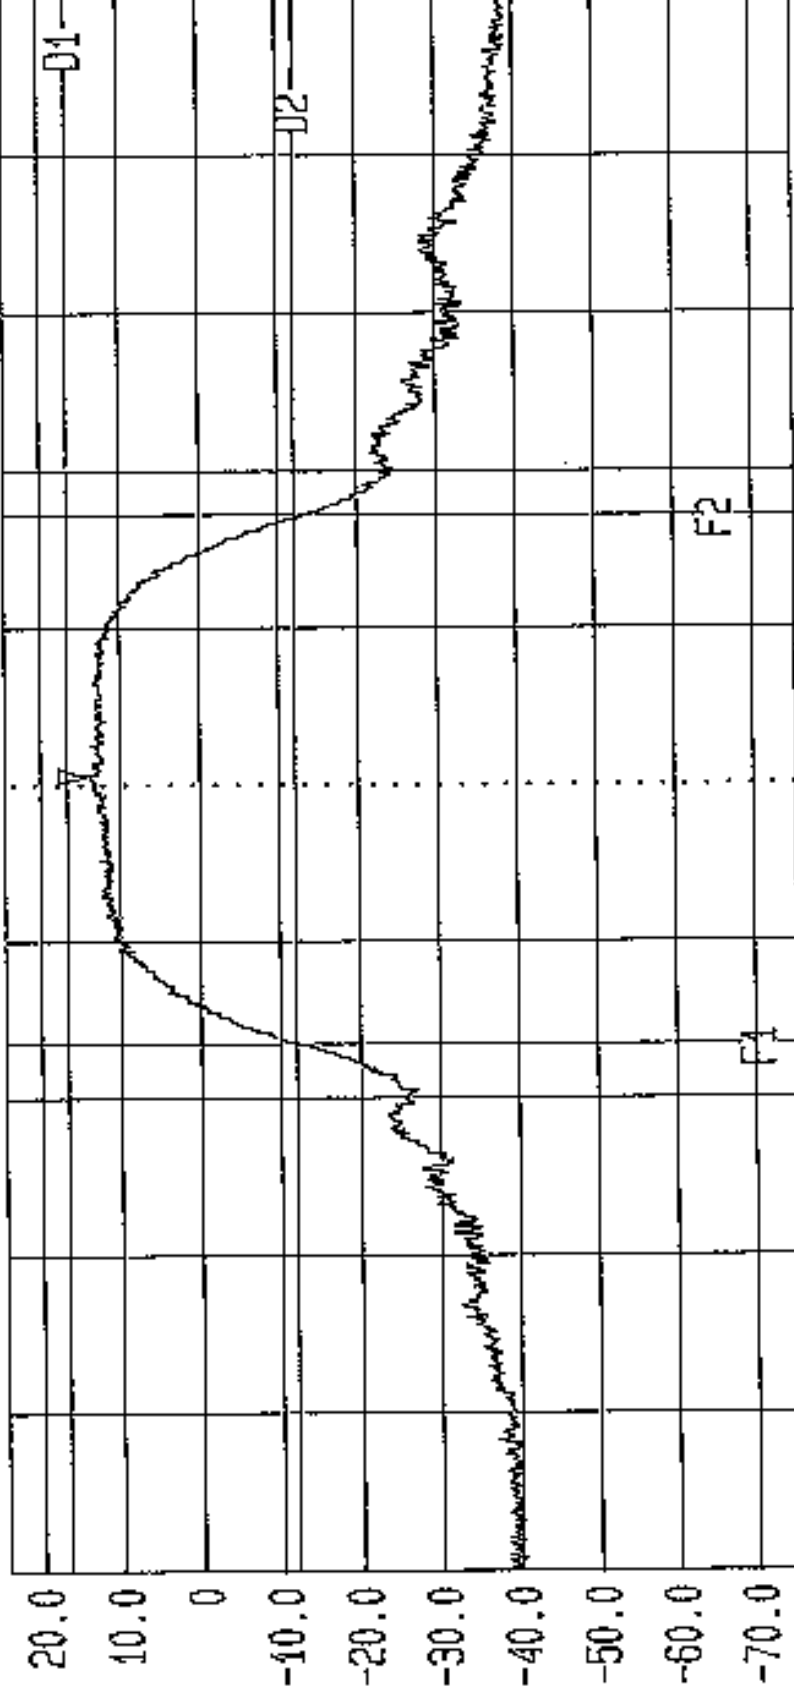

Start 5.1499 GHz Span 50 MHz Center 5.16999 GHz Sweep 20 ms Stop 5.19499 GHz

Radiated, Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit.
 limit. D1: 17dBm. FCC Part 15.407(a) TX: 5.15-5.25 GHz. Bott Chan. GPH/38658/JD04/076

LVLOFF

Date 29.Mar.'99 Time 09:30:43

Ref.Lvl Marker 15.59 dBm

24.50 dBm 5.23072 GHz

F1 5.22466666667 GHz D1

F2 5.23850000001 GHz D2

F2-F1 -16.833333334 MHz D1-D2

Res.Bw 1.0 MHz [3dB]

TG.Lvl off

CF.Stp 5.000 MHz


RF.Att 0 dB

Unit [dBm]

17.00 dBm

-10.40 dBm

-27.40 dB

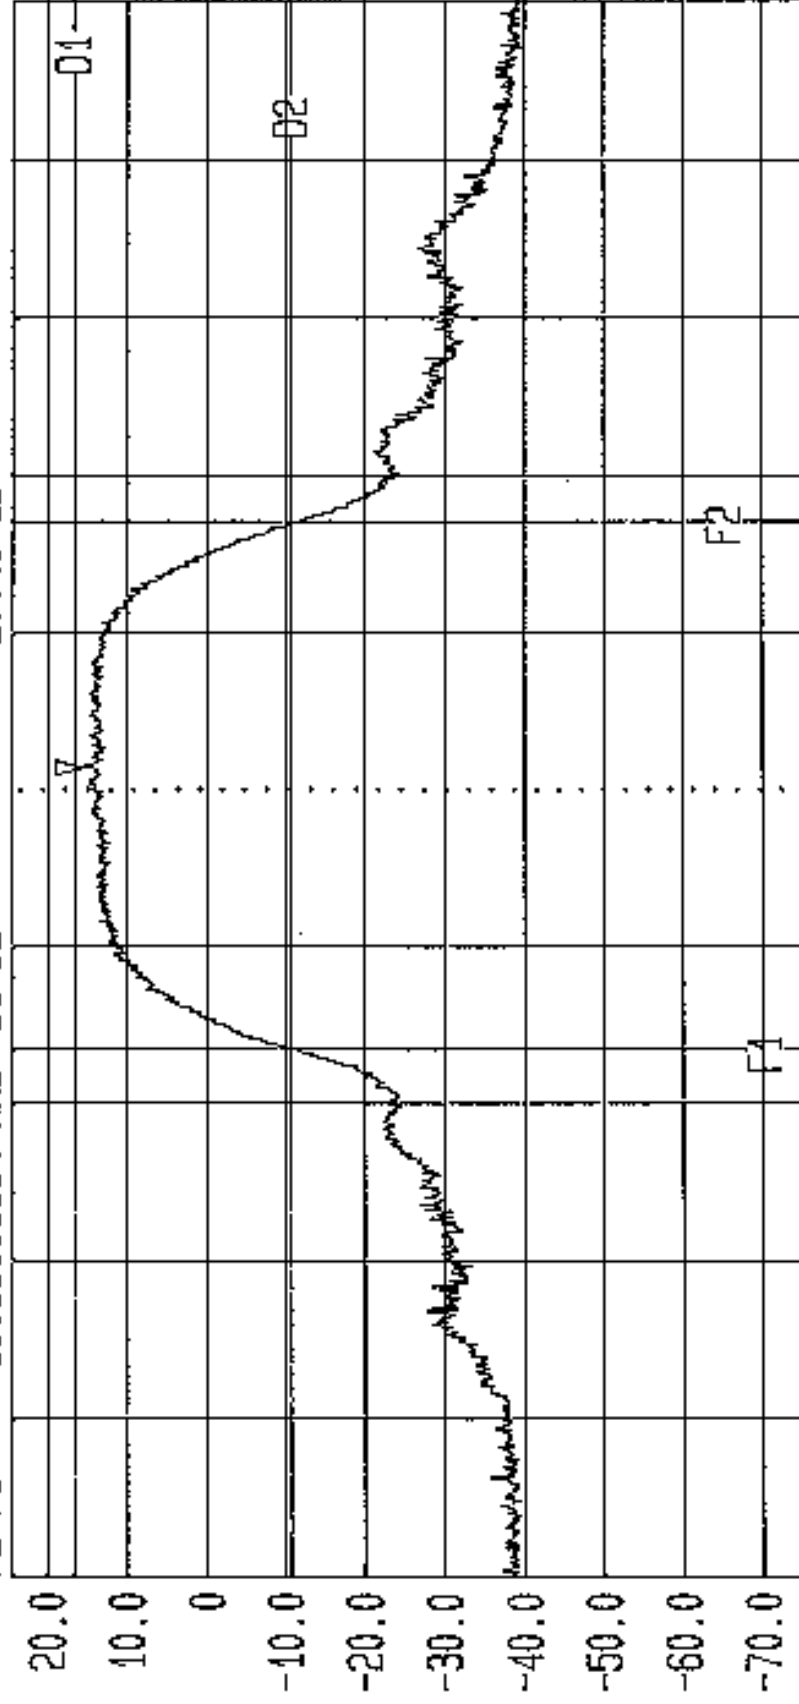

Start 5.205 GHz Span 50 MHz Center 5.23 GHz Sweep 20 ms Stop 5.255 GHz


Radiated. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit.
limit. D1: 17dBm. FCC Part 15.407(a) TX: 5.15-5.25 GHz. Top Chan. GPH/38658/JD04/077

LVLOFF

Date 29.Mar.'99 Time 09:37:02
 Ref.Lvl Marker 17.09 dBm
 24.50 dBm 5.23000 GHz

Res.BW 1.0 MHz [3dB]
 16.Lvl off
 CF.Stp 5.000 MHz
 Vid.Bw 1 MHz
 RF.Att 0 dB
 Unit [dBm]

F1 5.22166556657 GHz D1 17.00 dBm
 F2 5.23850000001 GHz D2 -8.91 dBm
 F2-F1 -15.83333334 MHz D1-D2 -25.91 dB

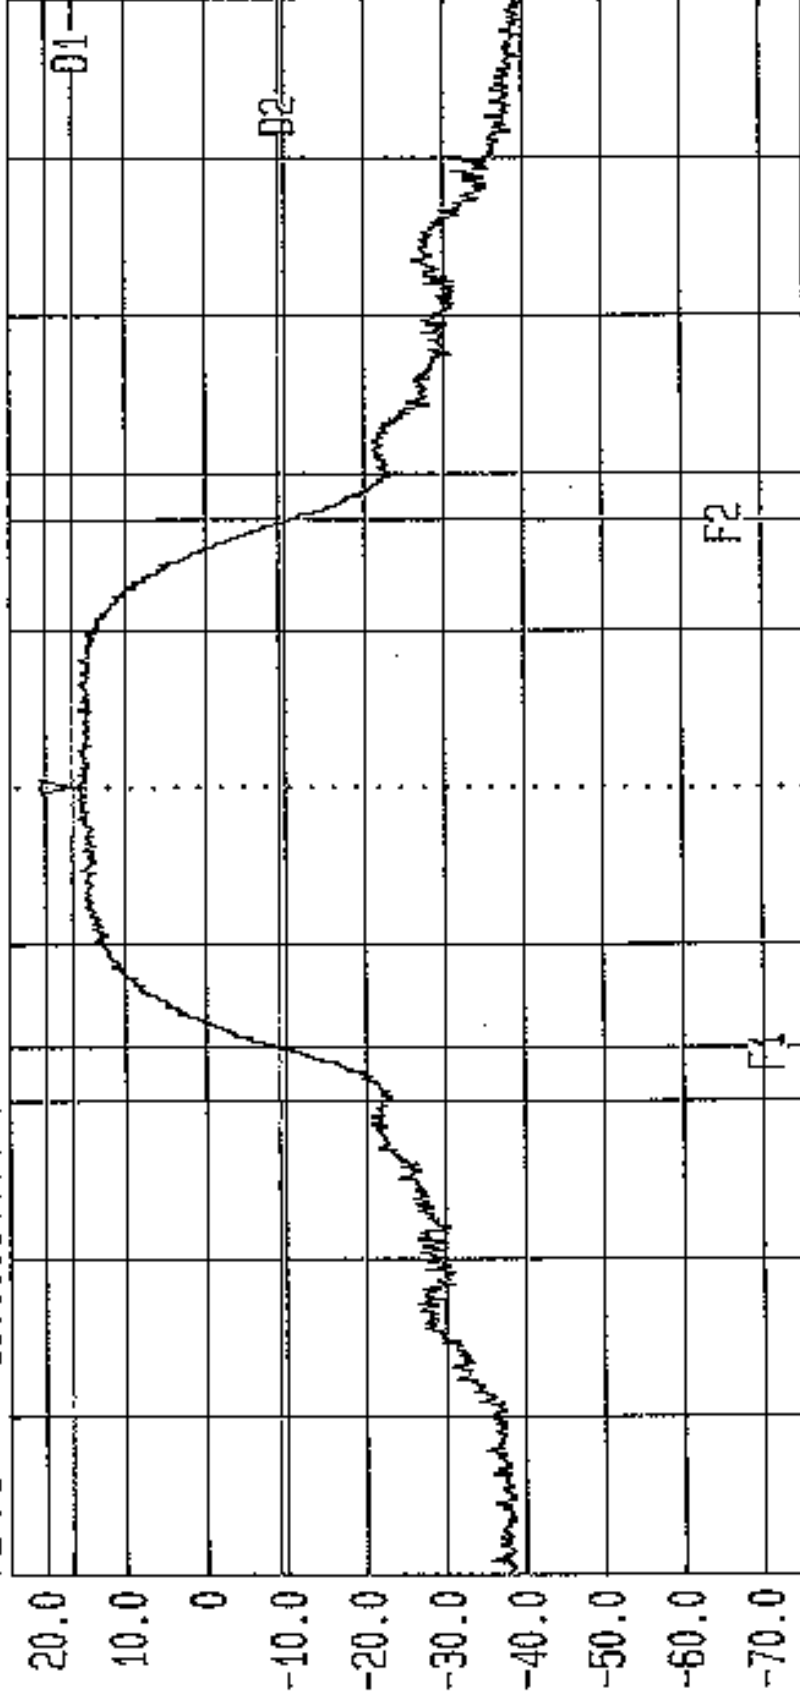


Start 5.205 GHz Span 50 MHz Center 5.23 GHz Sweep 5.255 GHz Stop
 Radiated, Tested by RFI for Adaptive Broadband Ltd, EUT: AB Access Subscriber Unit.
 Limit: D1: 17dBm. FCC Part 15.407(a) TX: 5.15-5.25 GHz. Top Chan. GPH/38658/J004/078

LVLOFF

Date 29.Mar.'99 Time 09:56:07
Ref.Lvl Marker 23.99 dBm
29.50 dBm 5.27022 GHz

Res.BW 1.0 MHz [3dB]
TG.Lvl Off
CF.Stp 5.000 MHz
Vid.Bw 1 MHz
RF.Att 5 dB
Unit [dBm]

F1 5.26166666668 GHz D1 23.25 dBm
F2 5.27849999998 GHz D2 -2.00 dBm
F2-F1 -16.833333330 MHz D1-D2 -25.25 dB

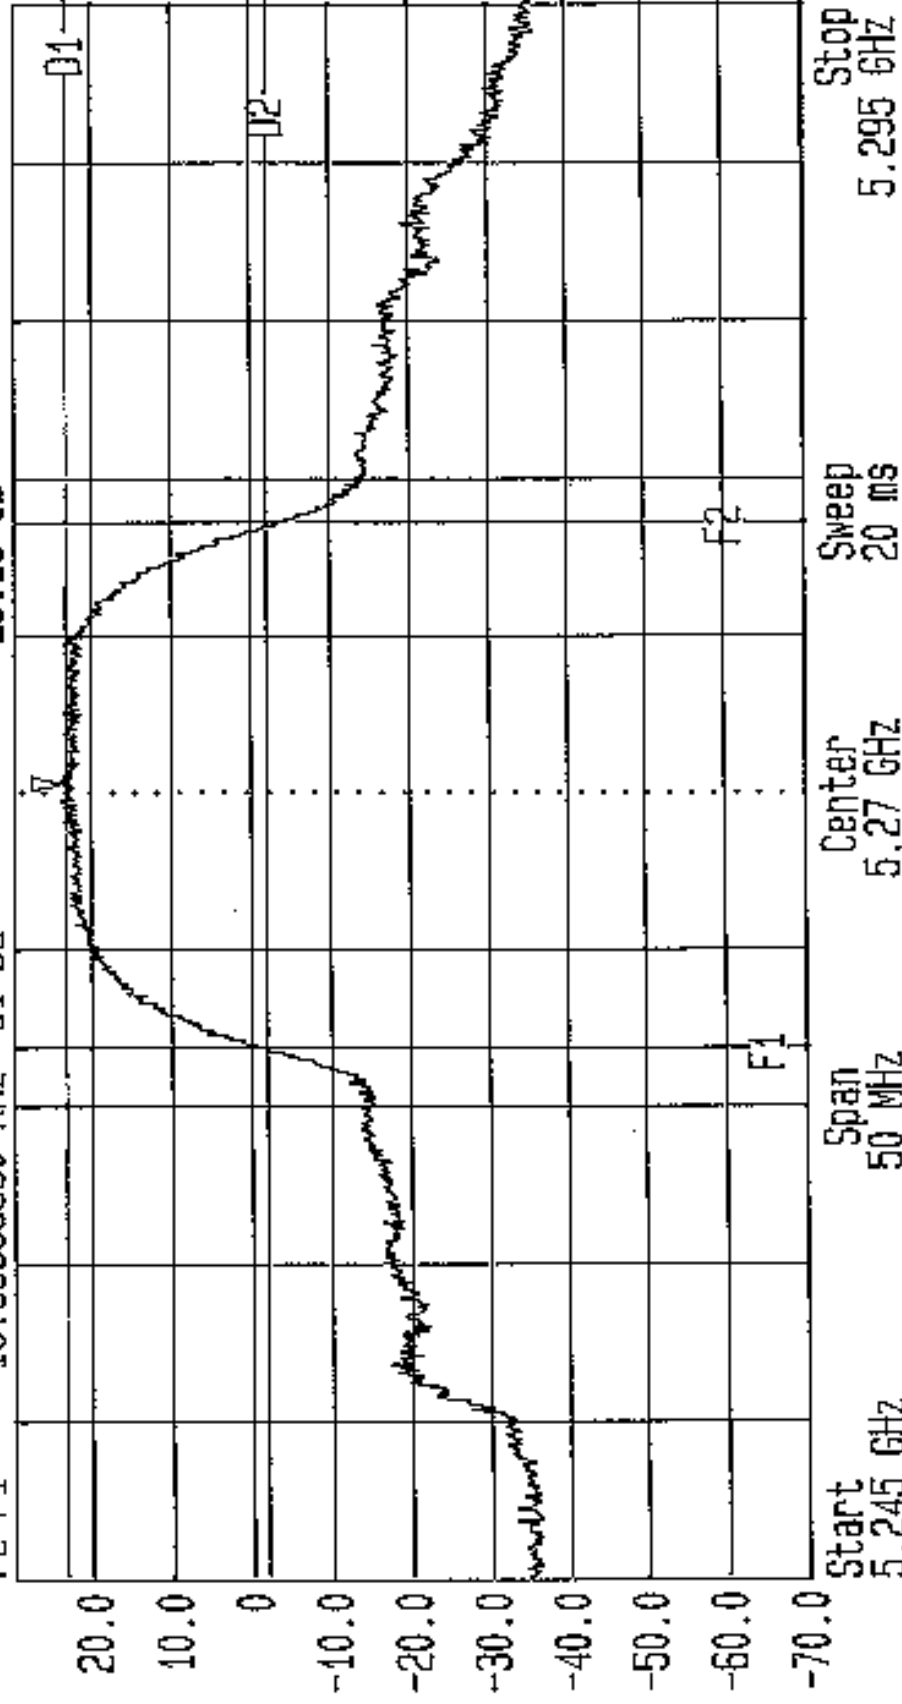

Radiated, Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit.
Limit. D1: 24dBm, FCC Part 15.407(a) TX: 5.25-5.35 GHz. Bott Chan. GPH/38658/JD04/079

LVLOFF

Date 29.Mar.'99 Time 10:04:28

Ref.Lvl Marker

29.50 dBm 26.00 dBm 5.27005 GHz

Res.Bw

1G.Lvl

CF.Stp

1.0 MHz [3dB]

off

5.000 MHz

Vid.Bw

RF.Att

Unit

1 MHz


5 dB

[dBm]

F1 5.25166666668 GHz D1 23.25 dBm

F2 5.27849999998 GHz D2 0 dBm

F2-F1 -16.833333330 MHz D1-D2 -23.25 dB

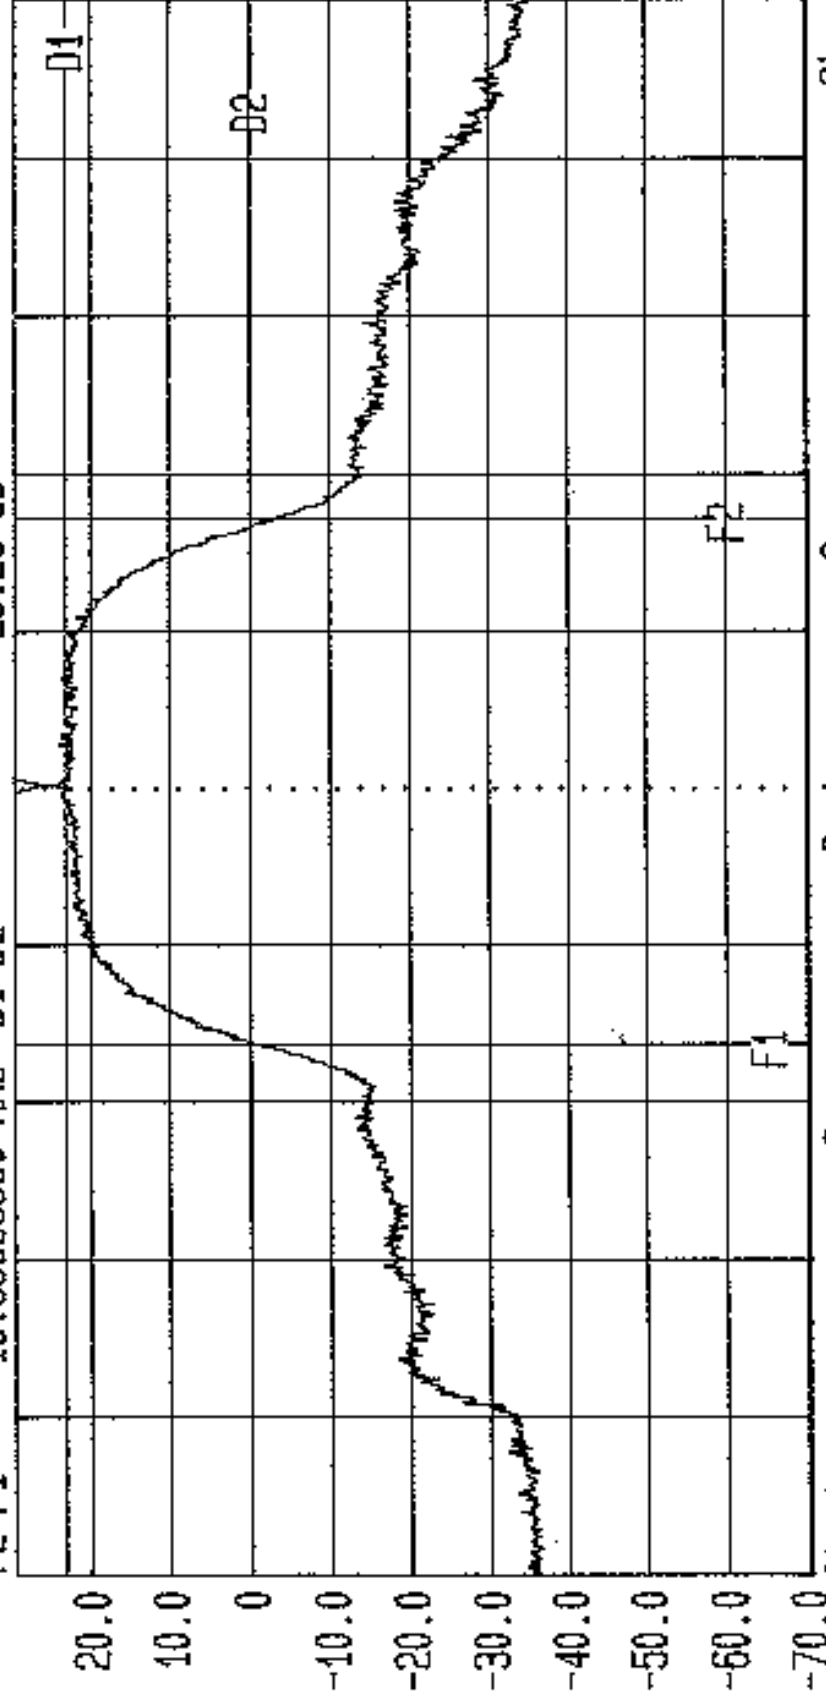

Start 5.245 GHz Span 50 MHz Center 5.27 GHz Sweep 20 ms Stop 5.295 GHz

Radiated. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit. Limit. D1: 24dBm. FCC Part 15.407 (a) TX: 5.25-5.35 GHz. Bott Chan. GPH/38658/JD04/080

LVLOFF Res.Bw 1.0 MHz [3dB] Vid.Bw 1 MHz


Date 29.Mar.'99 Time 10:10:37 16.Lvl off RF.Att 5 dB

Ref.Lvl Marker 25.14 dBm CF.Stp Unit

29.50 dBm F1 5.321722222 GHz D1 23.25 dBm

F2 5.338333333 GHz D2 -0.80 dBm

F2-F1 -16.64111115 MHz D1-D2 -24.05 dB

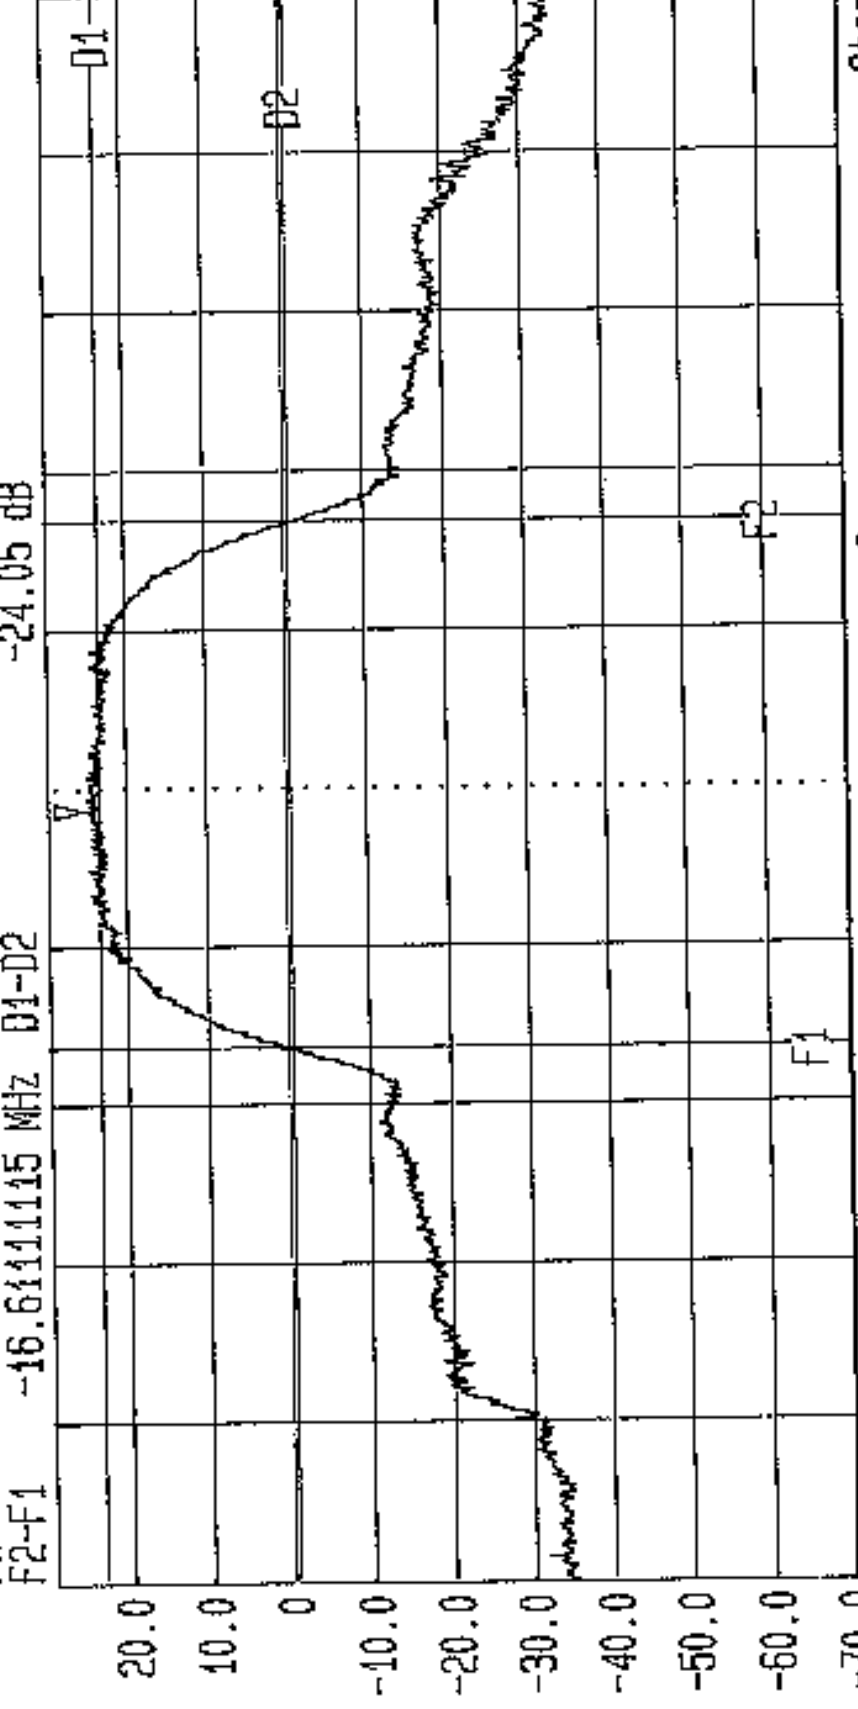

Start 5.305 GHz Span 50 MHz Center 5.33 GHz Sweep 20 ms Stop 5.355 GHz

Radiated. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit.
Limit. D1: 24dBm. FCC Part 15.407(a) TX: 5.25-5.35 GHz. Top Chan. GPH/38658/JD04/081

LVLOFF

Date 29.Mar.'99 Time 10:37:28

Ref.Lvl Marker 24.12 dBm

29.50 dBm

F1 5.3217222222 GHz D1

F2 5.33838888893 GHz D2

F2-F1 -16.66666671 MHz D1-D2

Res.Bw 1.0 MHz [3dB]

TG.Lvl off

CF.Stp 5.000 MHz

RF.Att

Unit

Vid.Bw 1 MHz


5 dB

[dBm]

23.25 dBm

-1.88 dBm

-25.13 dB

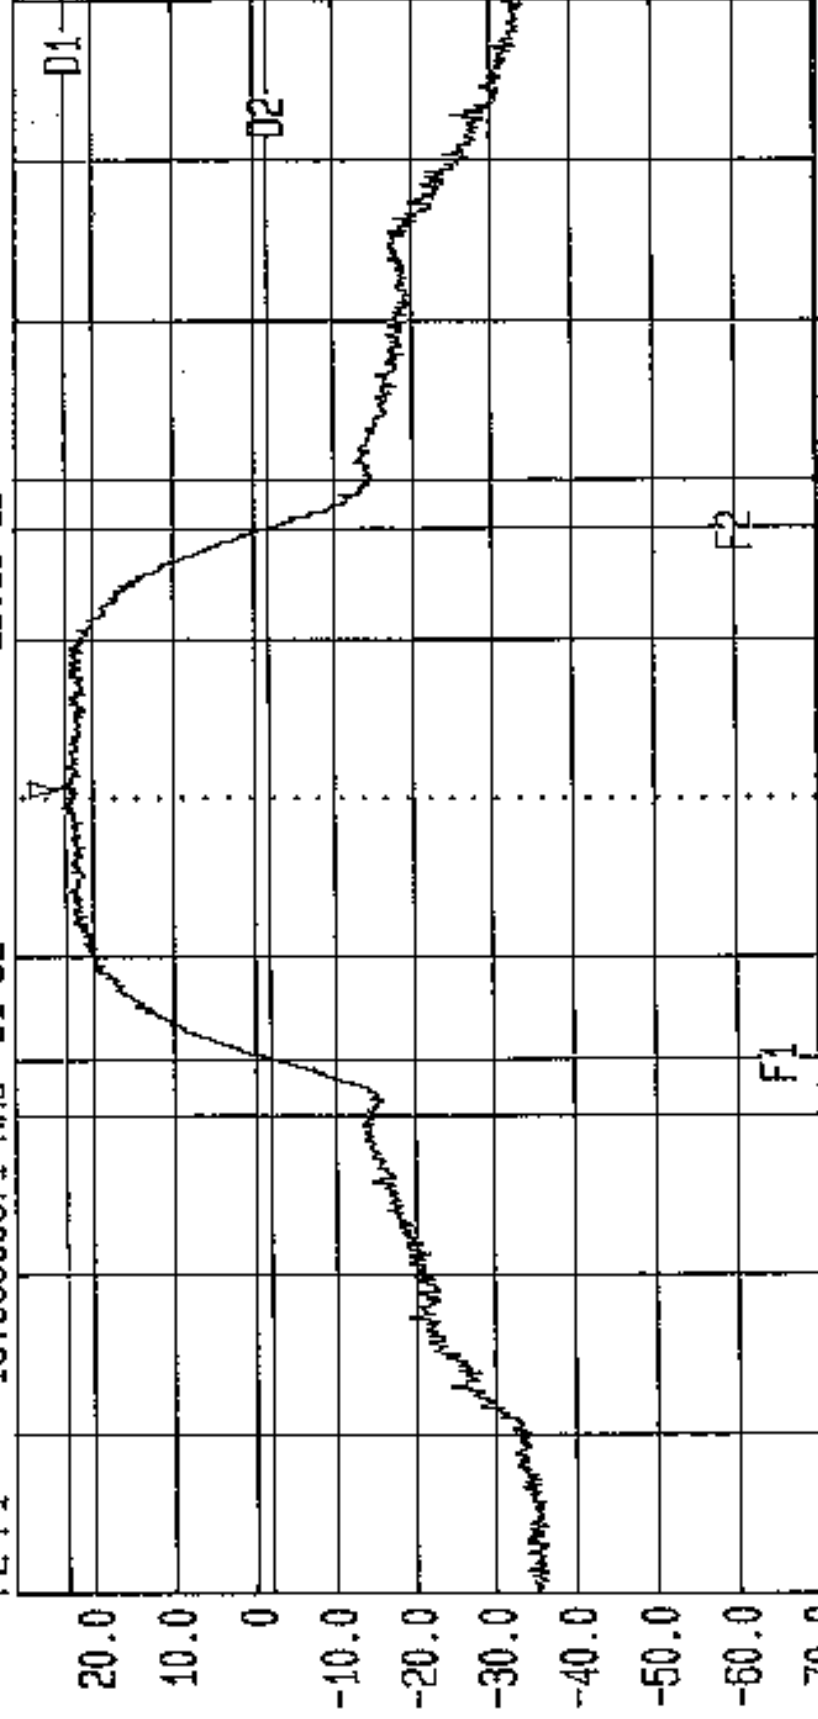

Start 5.305 GHz

Span 50 MHz

Center 5.33 GHz

Sweep 20 ms

Stop 5.355 GHz

Radiated. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit.
Limit. D1: 24dBm. FCC Part 15.407(a) TX: 5.25-5.35 GHz. Top Chan. GPH/38658/JD04/082


LVLOFF

Date 29.Mar.'99 Time 10:47:50

Ref.Lvl 34.50 dBm
Marker 29.91 dBm
5.74511 GHz

Res.Bw 1.0 MHz [3dB]
TG.Lvl off
CF.Stp 5.000 MHz
Vid.Bw 1 MHz
RF.Att 10 dB
Unit [dBm]

F1 5.7366111113 GHz D1 29.30 dBm
F2 5.7535000011 GHz D2 3.91 dBm
F2-F1 -16.88888898 MHz D1-D2 -25.39 dB

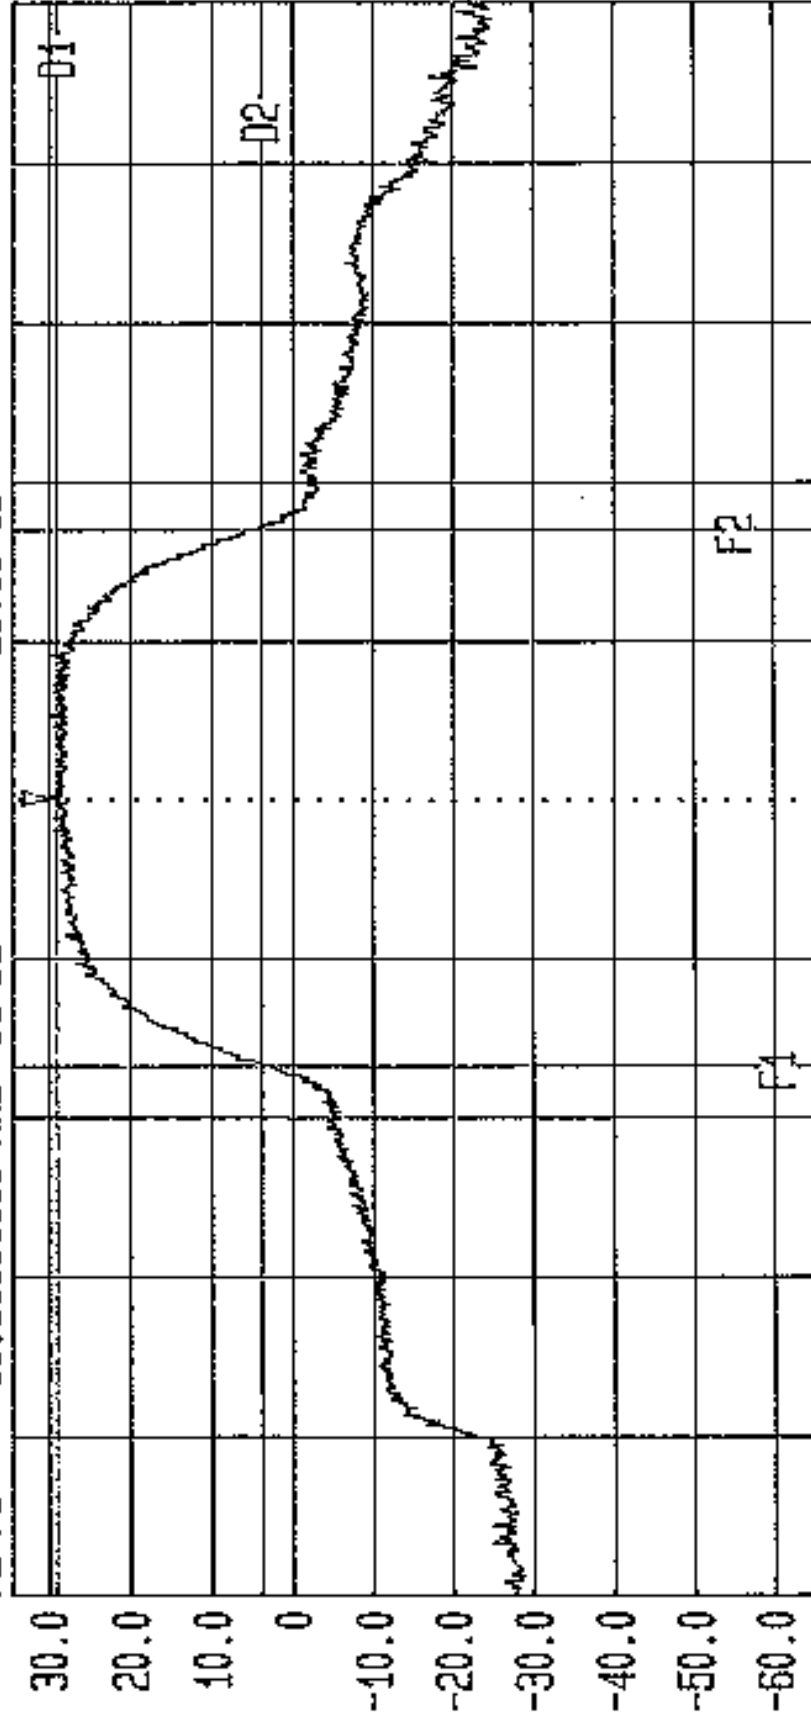


Start 5.72 GHz Span 50 MHz Center 5.745 GHz Sweep 20 ms Stop 5.77 GHz
Radiated, Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit.
Limit: D1: 24dBm. FCC Part 15.407 (a) TX: 5.725-5.825GHz. Bott Chan. GPH/38658/JD04/083

LVLOFF

Date 29.Mar.'99 Time 10:54:51
 Ref.Lvl Marker 30.87 dBm
 34.50 dBm 5.74777 GHz

Res.Bw 1.0 MHz [3dB]
 TG.Lvl off
 CF.Stp 5.000 MHz
 Vid.Bw 1 MHz
 RF.Att 10 dB
 Unit [dBm]

F1 5.7366111113 GHz D1 29.30 dBm
 F2 5.7535000011 GHz D2 4.87 dBm
 F2-F1 -16.88888898 MHz D1-D2 -24.43 dB

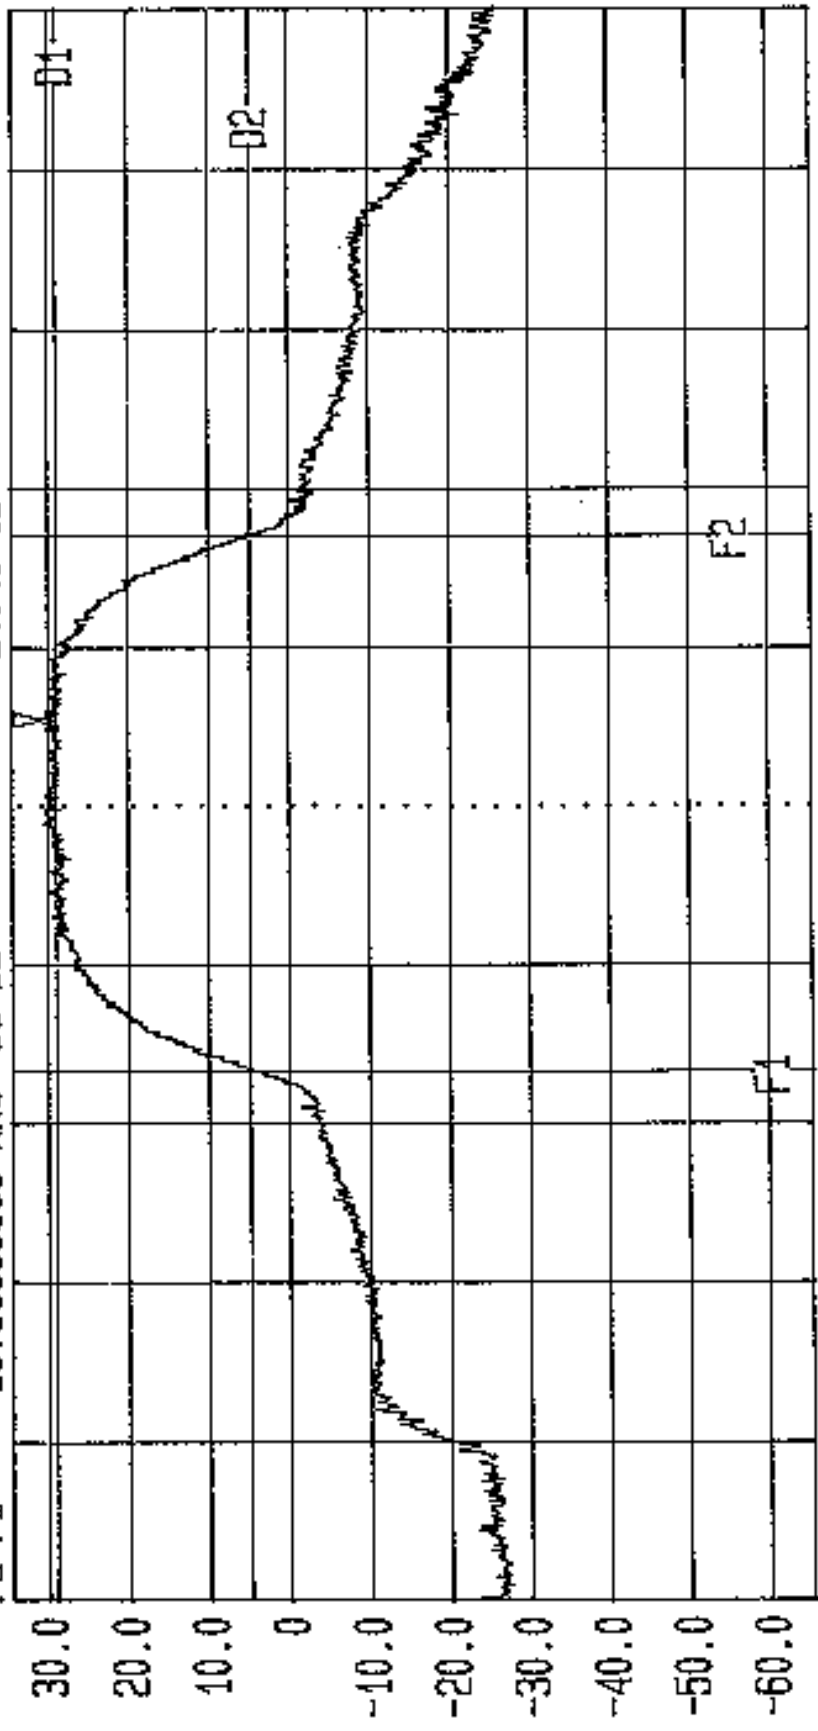

Start 5.72 GHz Span 50 MHz Center 5.745 GHz Sweep Stop 5.77 GHz
 Radiated, Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit.
 Limit: D1: 24dBm. FCC Part 15.407 (a) TX: 5.725-5.825GHz. Bott Chan. GPH/38658/JD04/084


LVLOFF

Date 29.Mar.'99 Time 11:03:00

Ref.Lvl 34.50 dBm
 Marker 30.75 dBm
 5.80527 GHz

Res.Bw 1.0 MHz [3dB]
 TG.Lvl off
 CF.Stp 5.000 MHz
 Vid.Bw 1 MHz
 RF.Att 10 dB
 Unit [dBm]

F1 5.796777776 GHz D1 29.30 dBm
 F2 5.813444447 GHz D2 4.75 dBm
 F2-F1 -16.6666671 MHz D1-D2 -24.55 dB

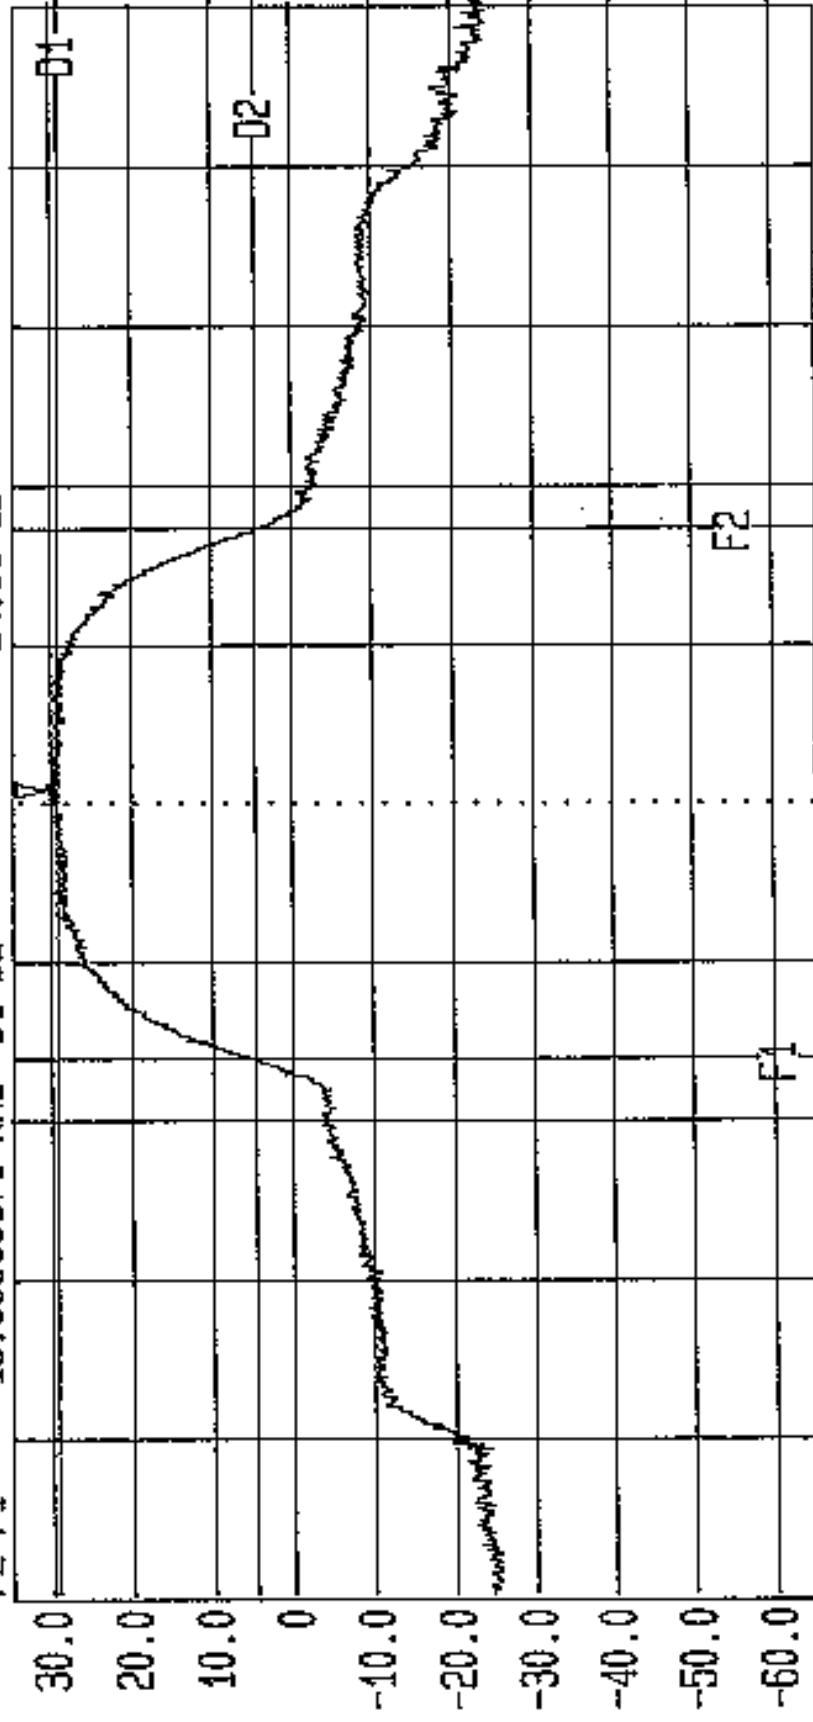

Start 5.78 GHz
 Span 50 MHz
 Center 5.805 GHz
 Sweep 20 ms
 Stop 5.83 GHz

Radiated. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit.
 Limit. D1: 29dBm. FCC Part 15.407 (a) TX: 5.725-5.825GHz. Top Chan. 6PH/38658/JD04/085


LVLOFF

Date 29.Mar.'99 Time 11:09:28

Ref.Lvl Marker 29.58 dBm
34.50 dBm 5.80533 GHz


Res.Bw 1.0 MHz [3dB] 1 MHz
TG.Lvl off
CF.Stp 5.000 MHz 10 dB
Unit [dBm]

F1 5.7967777776 GHz D1 29.30 dBm
F2 5.8134444447 GHz D2 3.58 dBm
F2-F1 -16.66666671 MHz D1-D2 -25.72 dB

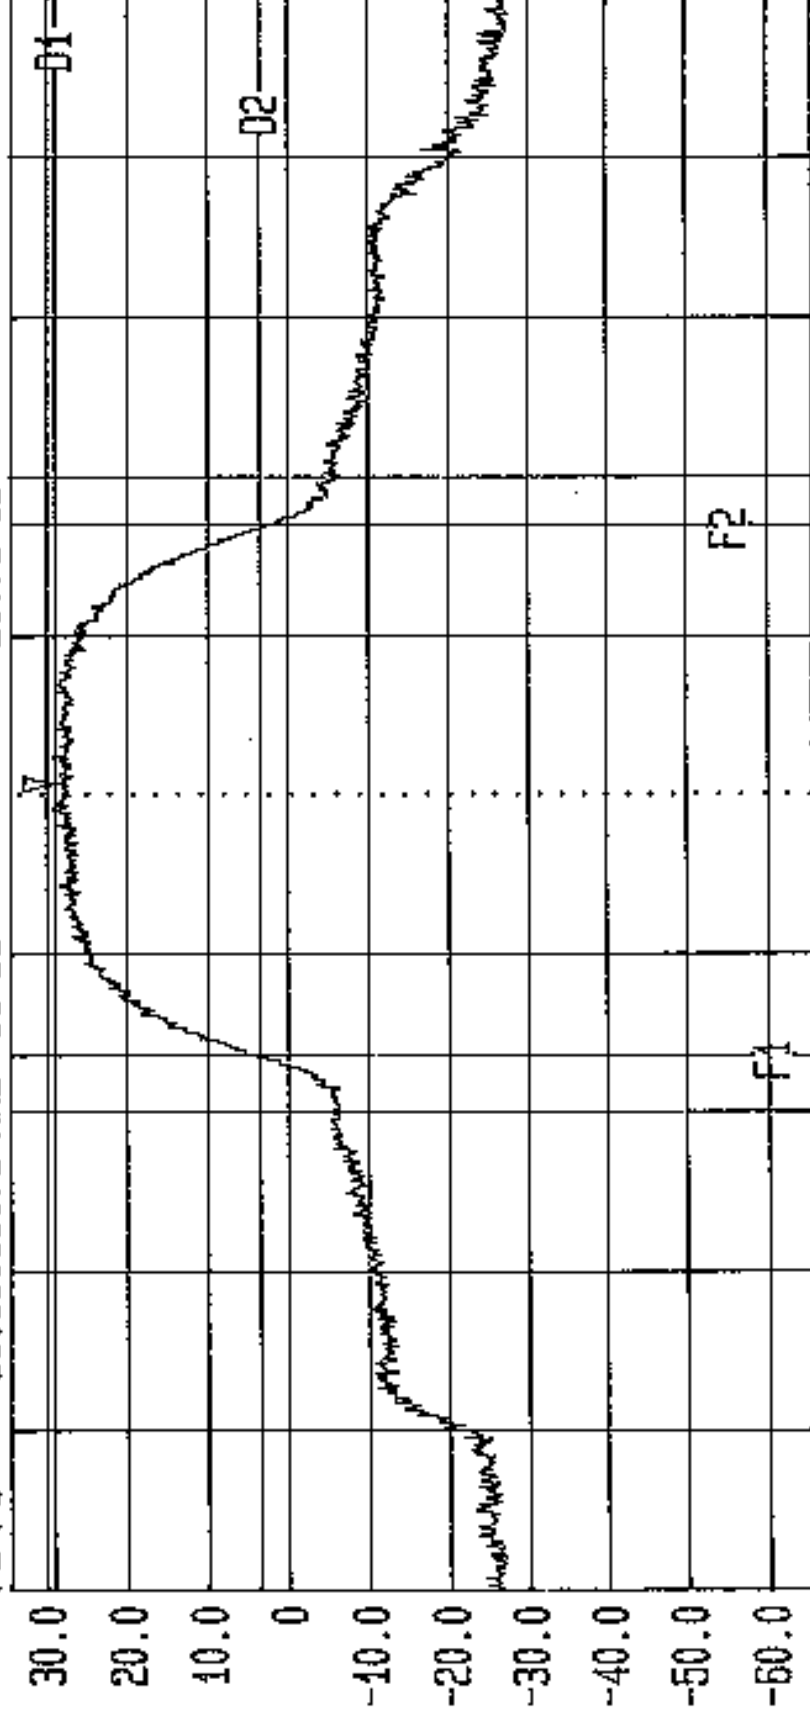


Start 5.78 GHz Span 50 MHz Center 5.805 GHz Sweep 20 ms Stop 5.83 GHz
Radiated. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit.
Limit. D1: 29dBm. FCC Part 15.407 (a) TX: 5.725-5.825GHz. Top Chan. GPH/38658/JD04/086

LVLOFF
 Date 29.Mar.'99 Time 11:31:16
 Ref.Lvl Marker -94.4 dBm/Hz
 24.50 dBm
 F1 5.150000000000 GHz D1
 F2 OFF D2
 F2-F1 OFF D1-D2
 Res.Bw 1.0 MHz [3dB] off
 TG.Lvl 25.000 MHz
 CF.Stp Unit
 Vid.Bw 1 MHz
 RF.Att 0 dB
 Unit [dBm]
 -27.00 dBm
 OFF
 OFF

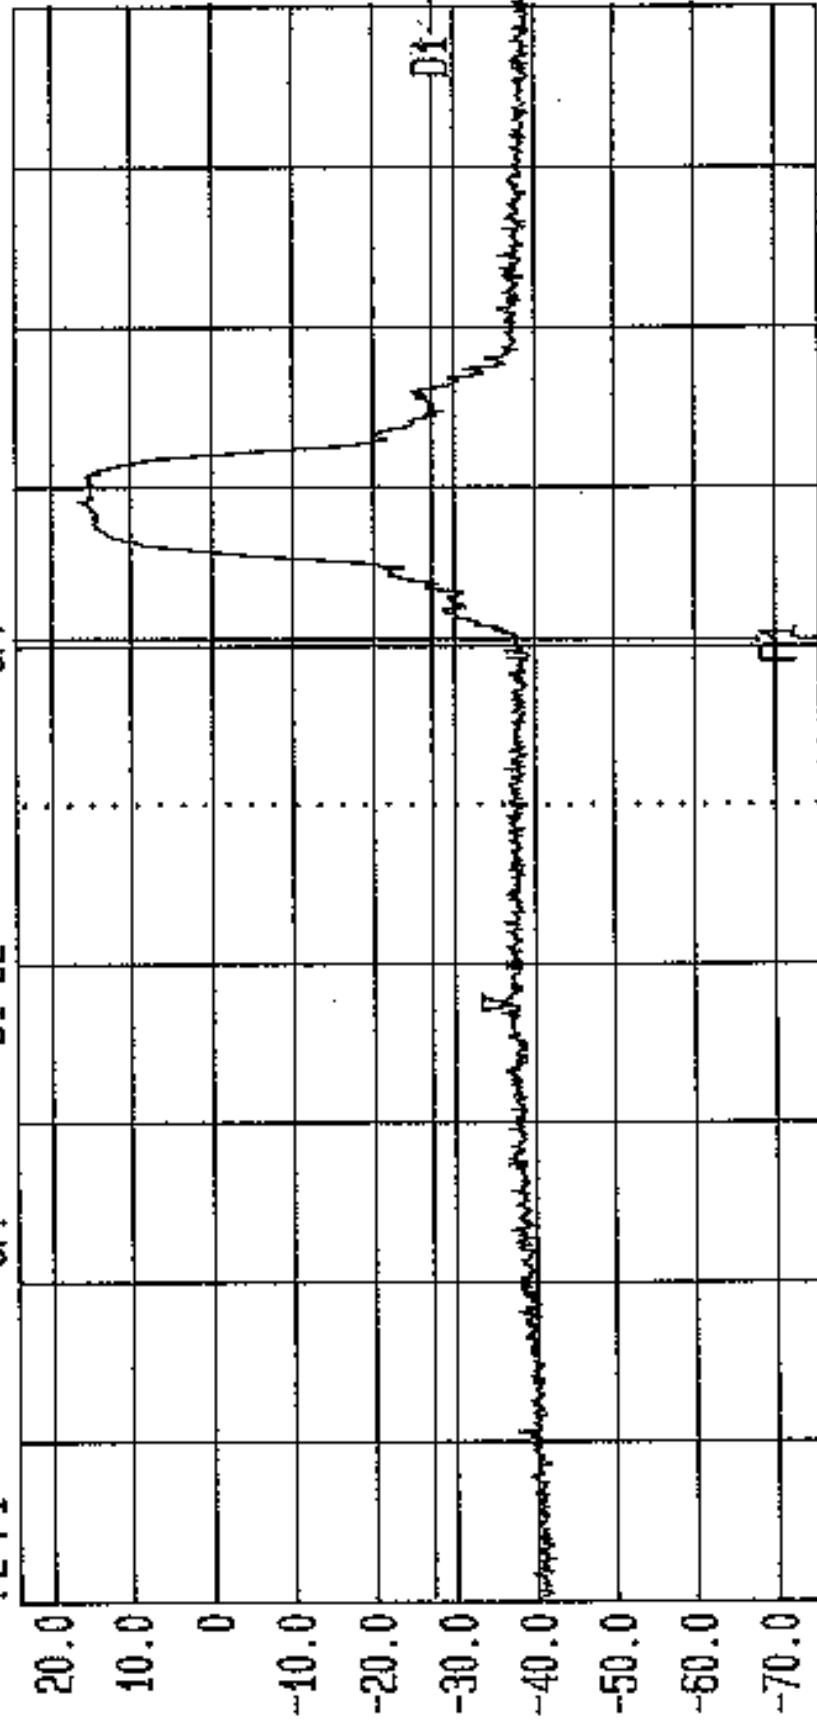


Start 5 GHz
 Span 250 MHz
 Center 5.125 GHz
 Sweep 20 ms
 Stop 5.25 GHz
 Radiated, Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit.
 Limit. D1: -27dBm. FCC Part 15.407(b) TX: 5.15-5.25GHz. Bott Chan. GPH/38658/J004/087

LVL OFF
 Date 29.Mar.'99 Time 11:38:56
 Ref.Lvl Marker -96.5 dBm/Hz
 24.50 dBm
 F1 5.1500000000 GHz D1
 F2 OFF D2
 F2-F1 OFF D1-D2
 Res.Bw 1.0 MHz [3dB] off
 T6.Lvl CF.Stp
 Vid.Bw 1 MHz
 RF:Att 0 dB
 Unit [dBm]
 -27.00 dBm
 OFF
 OFF

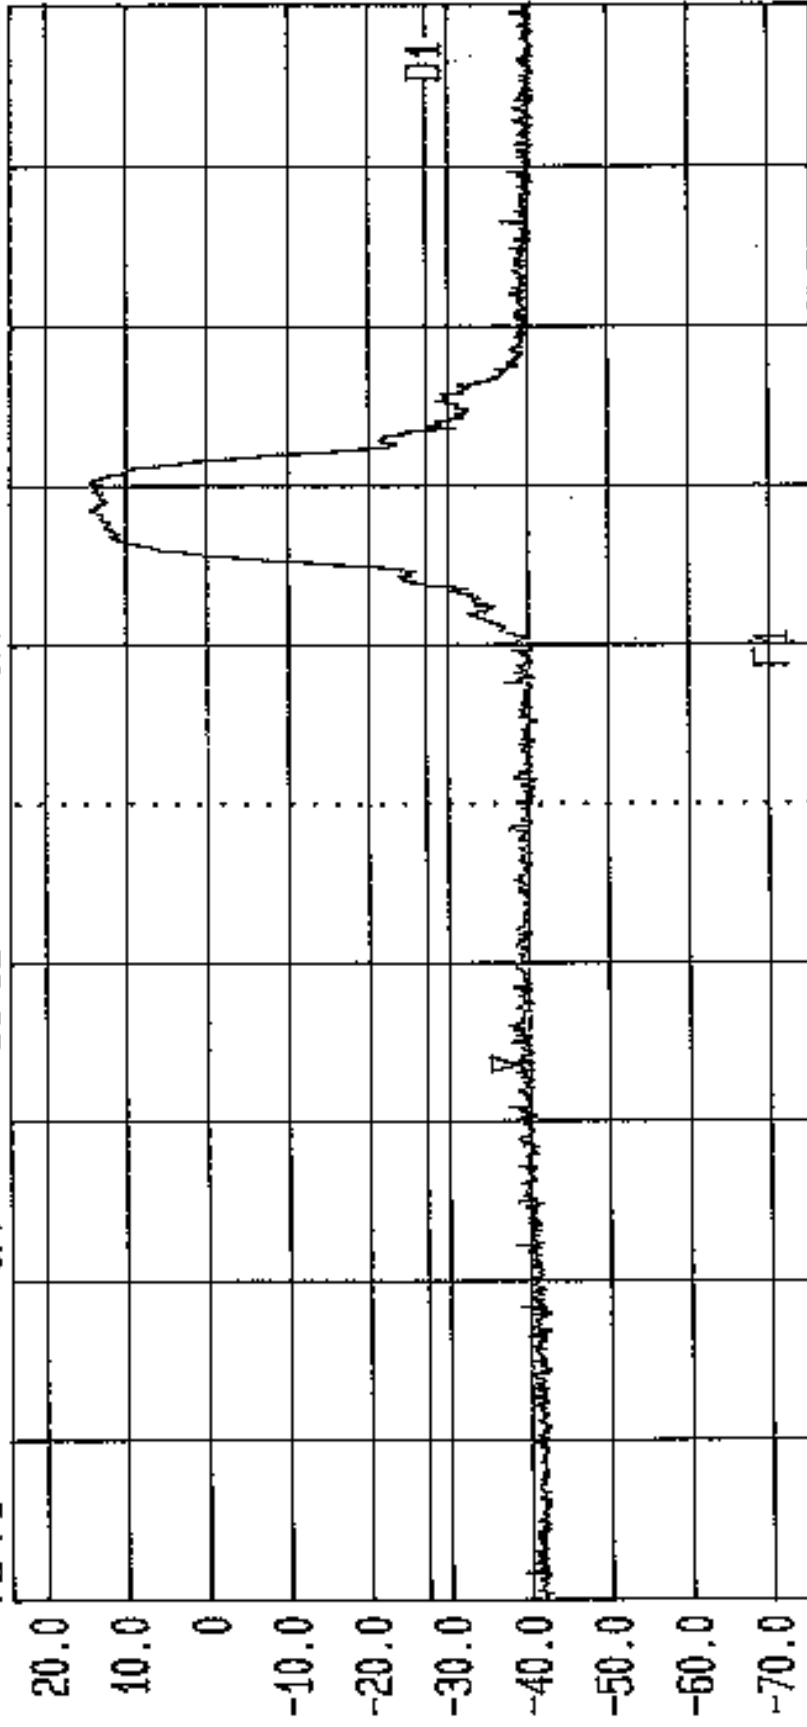


Start 5 GHz
 Span 250 MHz
 Center 5.125 GHz
 Sweep 20 ms
 Stop 5.25 GHz
 Radiated. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit.
 Limit. D1: -27dBm. FCC Part 15.407(b) TX: 5.15-5.25GHz. Bott Chan. GPH/38658/JD04/088

Date 29.Mar.'99 Time 11:50:18
 Ref.Lvl 24.50 dBm
 Marker -88.8 dBm/Hz
 5.8066 GHz
 F1 OFF D1
 F2 OFF D2
 F2-F1 OFF D1-D2
 LVL OFF
 Res.Bw 1.0 MHz [3dB]
 TG.Lvl Off
 CF.Stp 75.000 MHz
 Vid.Bw 1 MHz
 RF.Att 0 dB
 Unit [dBm]

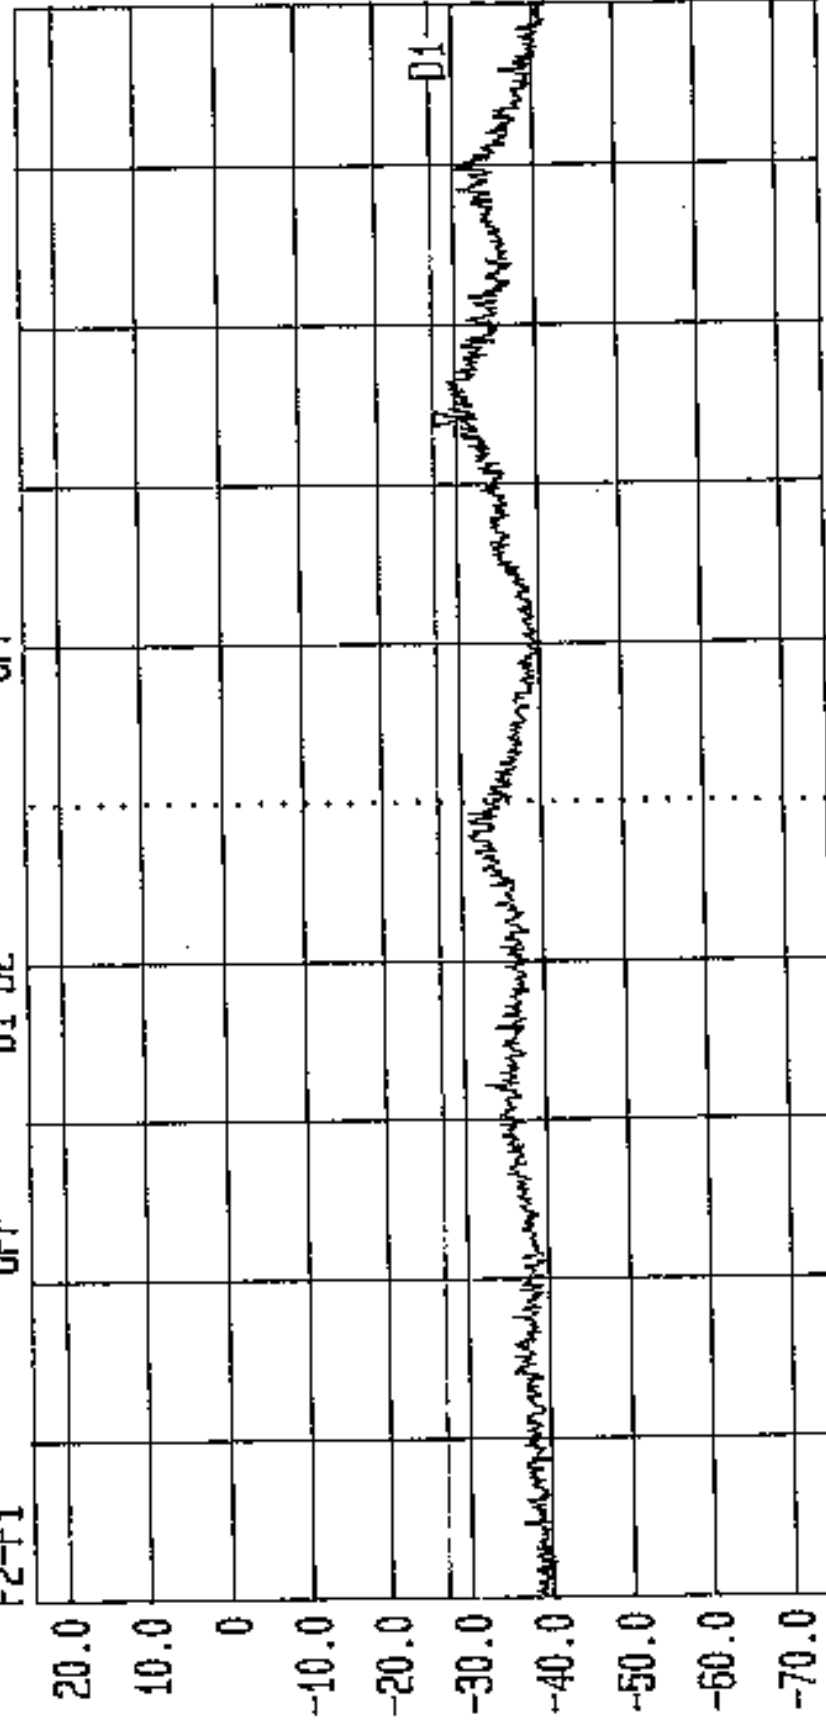


Start 5.25 GHz
 Span 750 MHz
 Center 5.625 GHz
 Sweep 20 ms
 Stop 6 GHz
 Radiated. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit.
 Limit. D1: -27dBm. FCC Part 15.407 (b) TX: 5.15-5.25GHz. Bott Chan. GPH/38658/JD04/089

LVLOFF
 Date 29.Mar.'99 Time 11:55:55
 Ref.Lvl 24.50 dBm
 Marker -94.0 dBm/Hz
 4.9855 GHz
 F1 OFF D1
 F2 OFF D2
 F2-F1 OFF D1-D2
 Res.Bw 1.0 MHz [3dB]
 TG.Lvl Off
 CF.Stp 100.000 MHz
 Vid.Bw 1 MHz
 RF.Att 0 dB
 Unit [dBm]
 -27.00 dBm
 OFF
 OFF

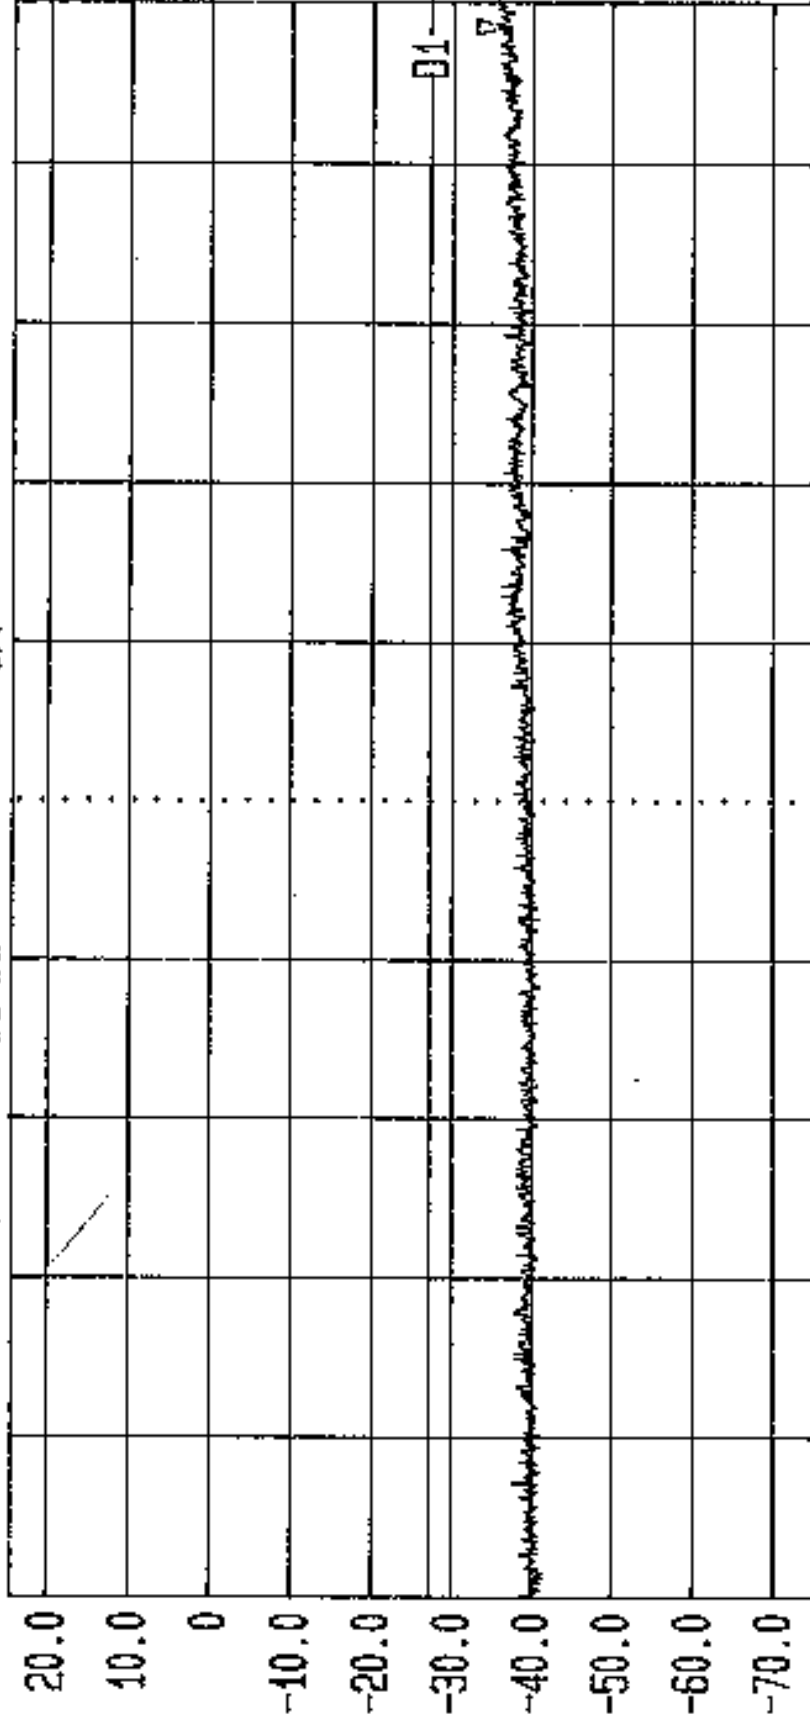


Start 4 GHz
 Span 1 GHz
 Center 4.5 GHz
 Sweep 20 ms
 Stop 5 GHz
 Radiated. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit.
 Limit. D1: -27dBm. FCC Part 15.407(b) TX: 5.15-5.25GHz. Bott Chan. 6PH/38658/JD04/090

LVLOFF
 Date 29.Mar.'99 Time 12:02:39
 Ref.Lvl 24.50 dBm
 Marker -91.3 dBm/Hz
 5.2501 GHz
 F1 OFF D1
 F2 5.2500000000 GHz D2
 F2-F1 OFF D1-D2
 Res.Bw 1.0 MHz [3dB]
 16.Lvl off
 CF.Stp 12.500 MHz
 Vid.Bw 1 MHz
 AF.Att 0 dB
 Unit [dBm]
 -27.00 dBm
 OFF
 OFF

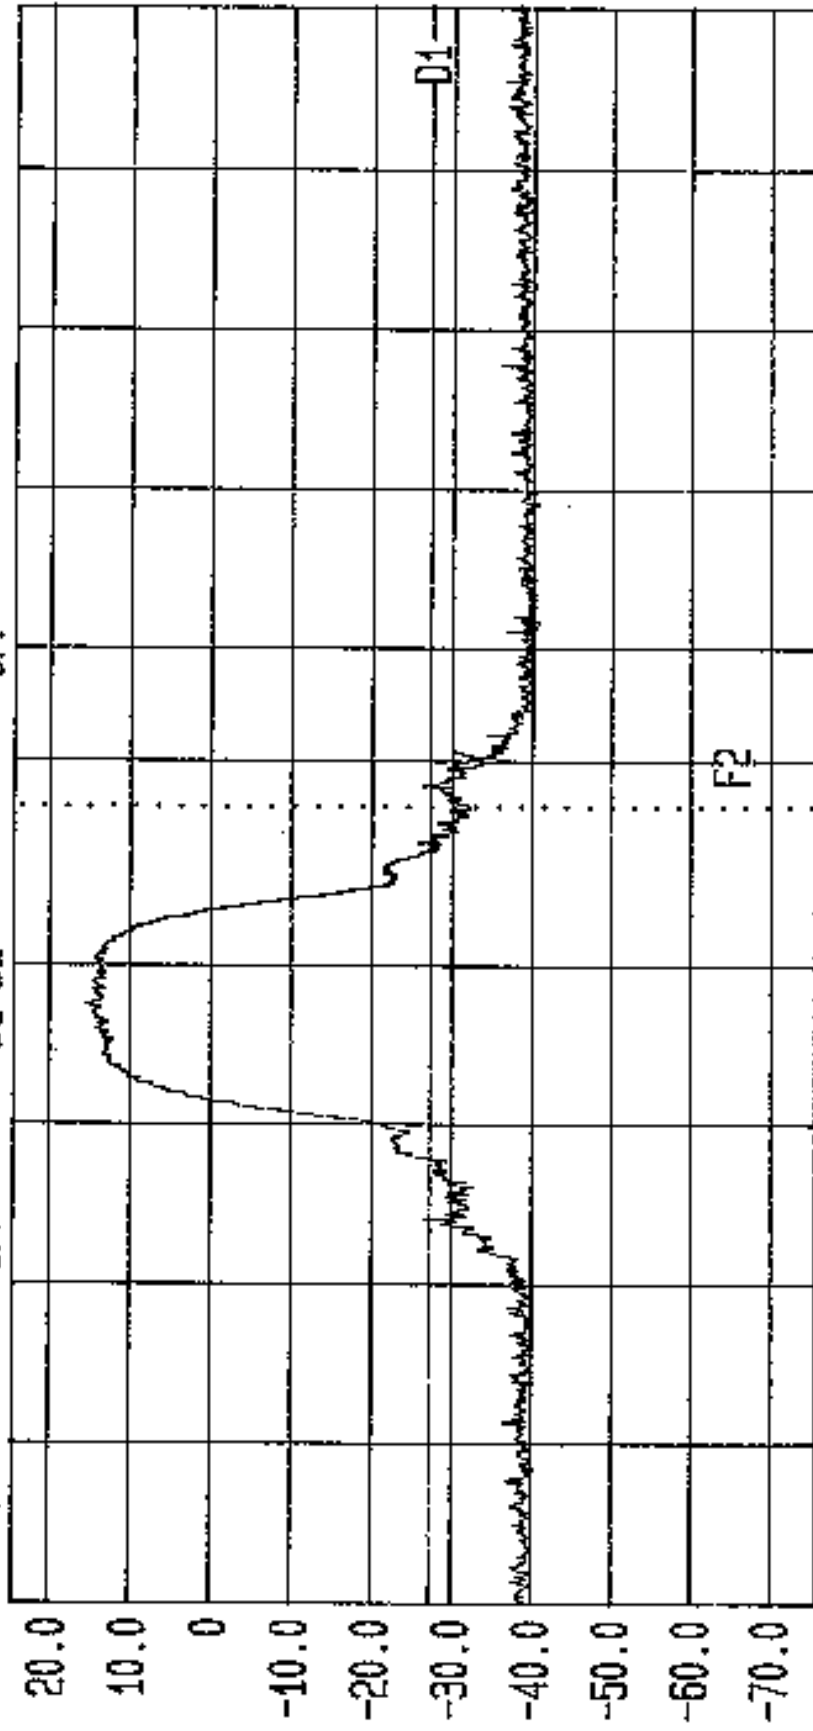


Start 5.1838 GHz Span 125 MHz Center 5.2463 GHz Sweep 20 ms Stop 5.3088 GHz
 Radiated. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit.
 Limit. D1: -27dBm. FCC Part 15.407(b) TX: 5.15-5.25GHz. Top Chan. 6PH/38658/JD04/091

LVLOFF
 Date 29.Mar.'99 Time 12:08:31
 Ref.Lvl Marker -90.9 dBm/Hz
 24.50 dBm 5.2501 GHz
 F1 OFF D1
 F2 5.2500000000 GHz D2
 F2-F1 OFF D1-D2
 Res.Bw 1.0 MHz [3dB] off
 TG.Lvl CF.Stp
 Vid.Bw 1 MHz
 RF.Att 0 dB
 Unit [dBm]
 -27.00 dBm
 OFF
 OFF

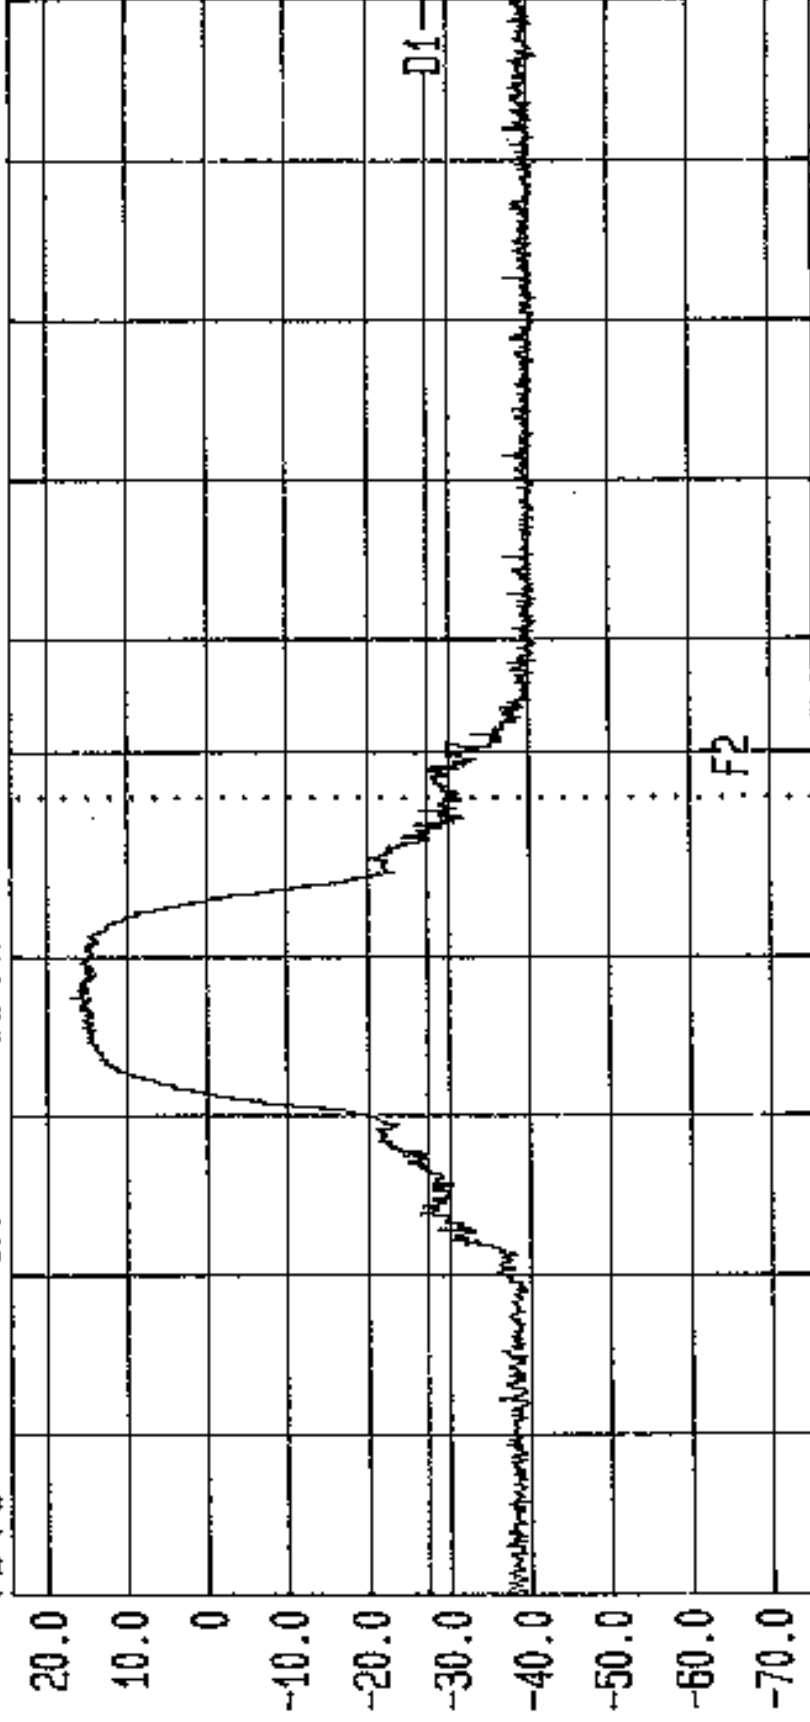


Start 5.1838 GHz Span 125 MHz Center 5.2463 GHz Sweep 20 ms Stop 5.3088 GHz
 Radiated. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit.
 Limit. D1: -27dBm. FCC Part 15.407(b) TX: 5.15-5.25GHz. Top Chan. GPH/38658/JD04/092

LVL OFF
 Date 29.Mar.'99 Time 12:14:16
 Ref.Lvl Marker -95.9 dBm/Hz
 24.50 dBm 5.1166 GHz
 F1 OFF D1
 F2 5.150000000000 GHz D2
 F2-F1 OFF D1-D2
 Res.Bw 1.0 MHz [3dB] 1 MHz
 TG.Lvl Off
 CF.Stp 20.000 MHz
 Vid.Bw RF.Att 0 dB
 Unit [dBm]
 -27.00 dBm
 OFF
 OFF

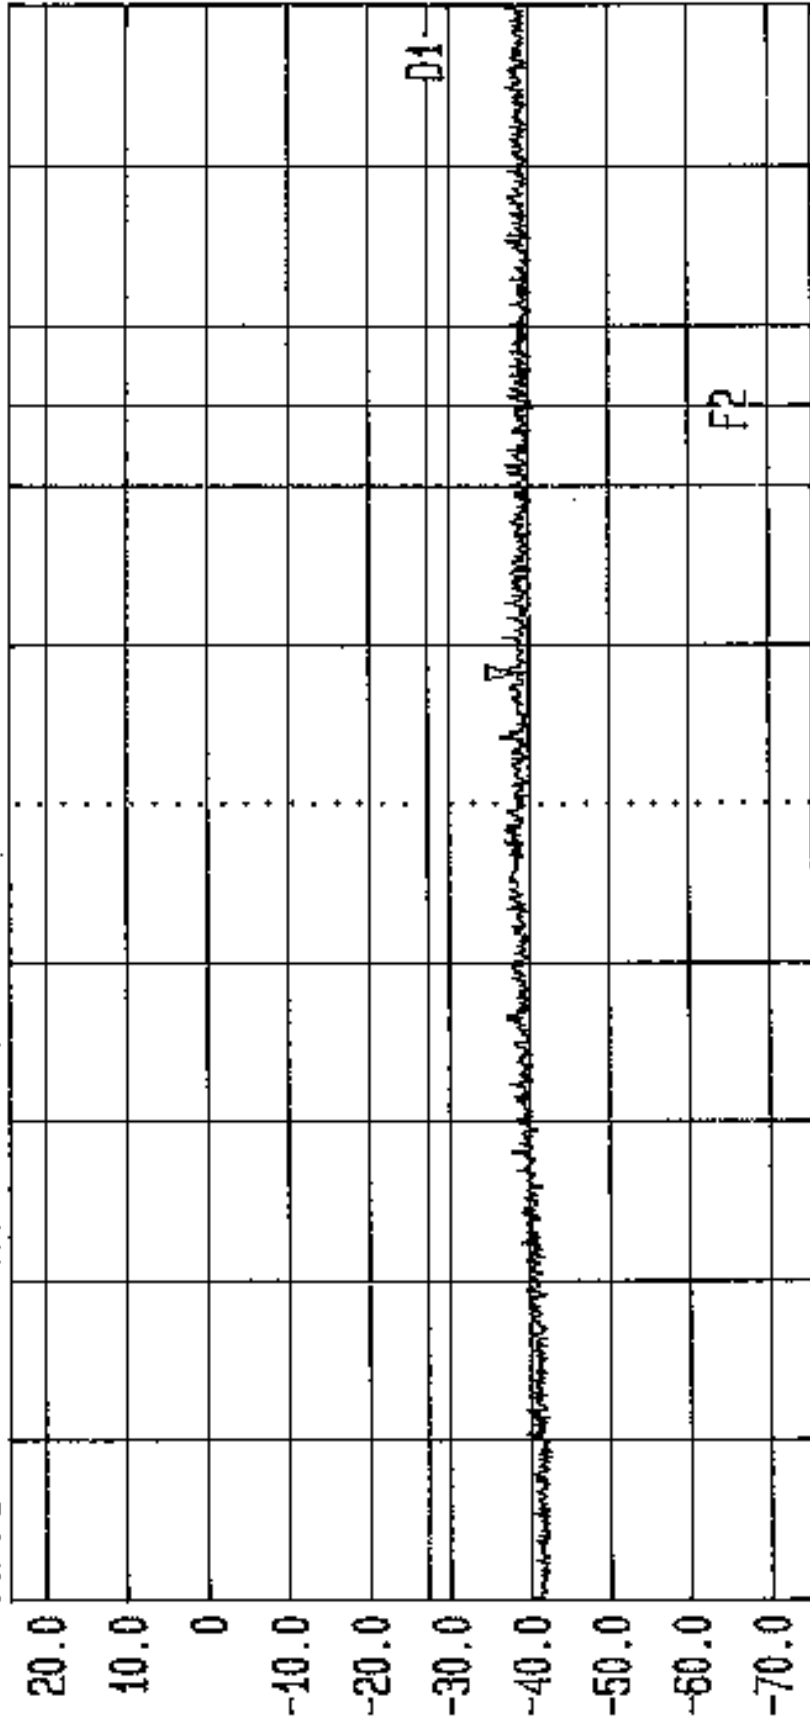


Start 5 GHz
 Span 200 MHz
 Center 5.1 GHz
 Sweep 20 ms
 Stop 5.2 GHz
 Radiated. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit.
 Limit. D1: -27dBm. FCC Part 15.407(b) TX: 5.15-5.25GHz. Top Chan. GPH/38658/JD04/093

LVLOFF
 Date 29.Mar.'99 Time 12:20:38
 Ref.Lvl 24.50 dBm
 Marker -88.1 dBm/Hz
 5.8180 GHz
 F1 OFF D1
 F2 OFF D2
 F2-F1 OFF D1-D2
 Res.Bw 1.0 MHz [3dB]
 TG.Lvl Off
 CF.Stp 70.000 MHz
 Vid.Bw 1 MHz
 RF.Att 0 dB
 Unit [dBm]
 -27.00 dBm
 OFF
 OFF

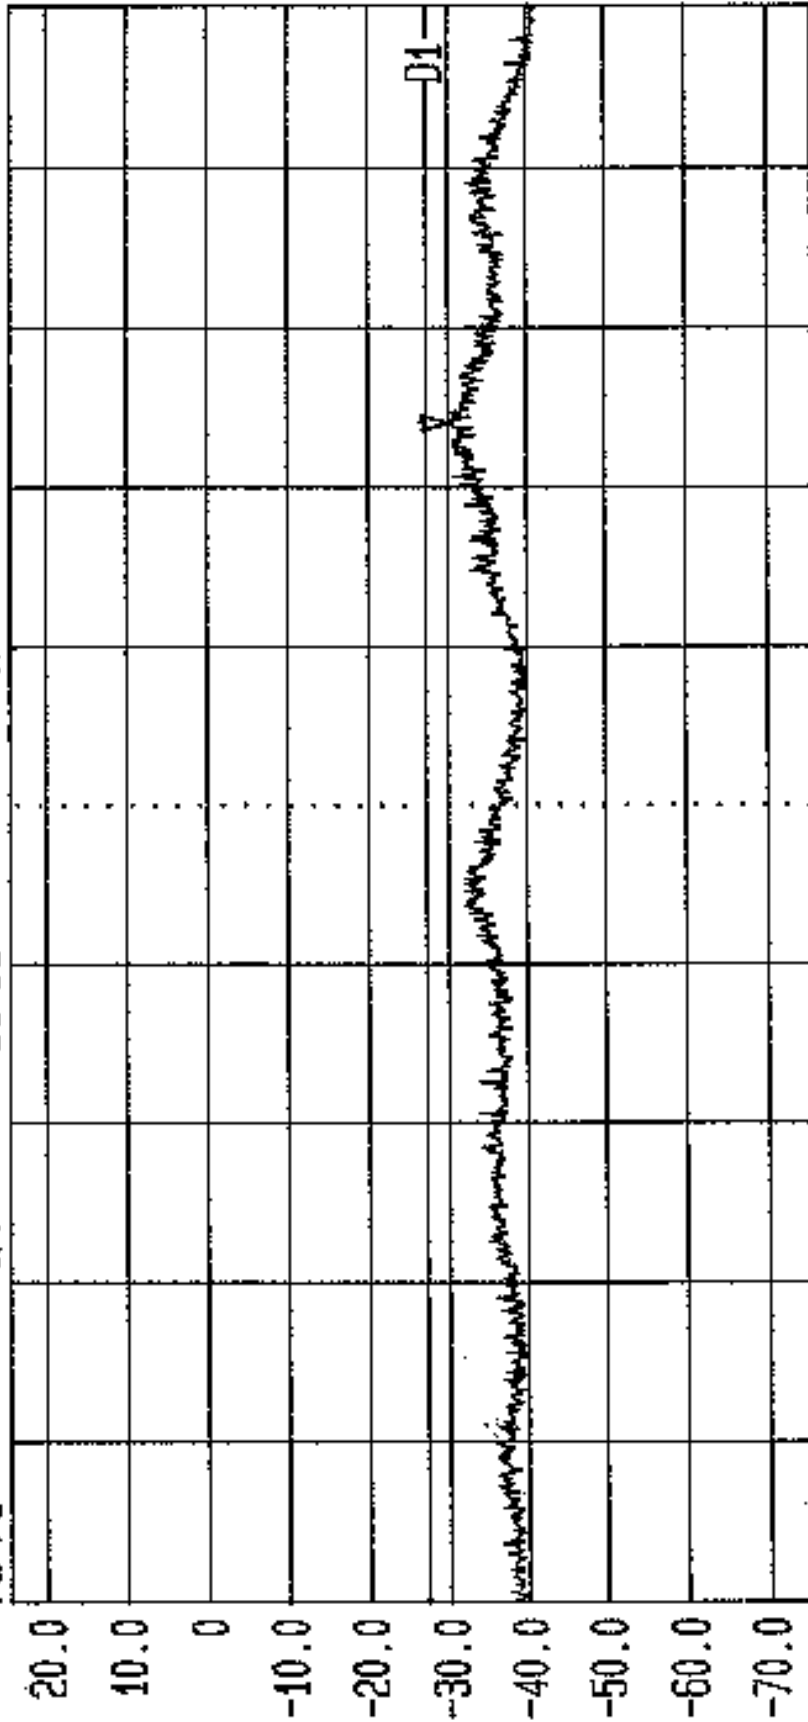


Start 5.3 GHz
 Span 700 MHz
 Center 5.65 GHz
 Sweep 20 ms
 Stop 6 GHz
 Radiated. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit.
 Limit. D1: -27dBm. FCC Part 15.407(b) TX: 5.15-5.25GHz. Top Chan. GPH/38658/JD04/094

LVLOFF
 Date 29.Mar.'99 Time 12:26:41
 Ref.Lvl 24.50 dBm
 Marker -95.2 dBm/Hz
 4.8544 GHz
 F1 OFF D1
 F2 OFF D2
 F2-F1 OFF D1-D2
 Res.BW 1.0 MHz [3dB]
 IG.Lvl Off
 CF.Stp 100.000 MHz
 RF.Att 0 dB
 Unit [dBm]
 Vid.Bw 1 MHz
 -27.00 dBm
 OFF
 OFF

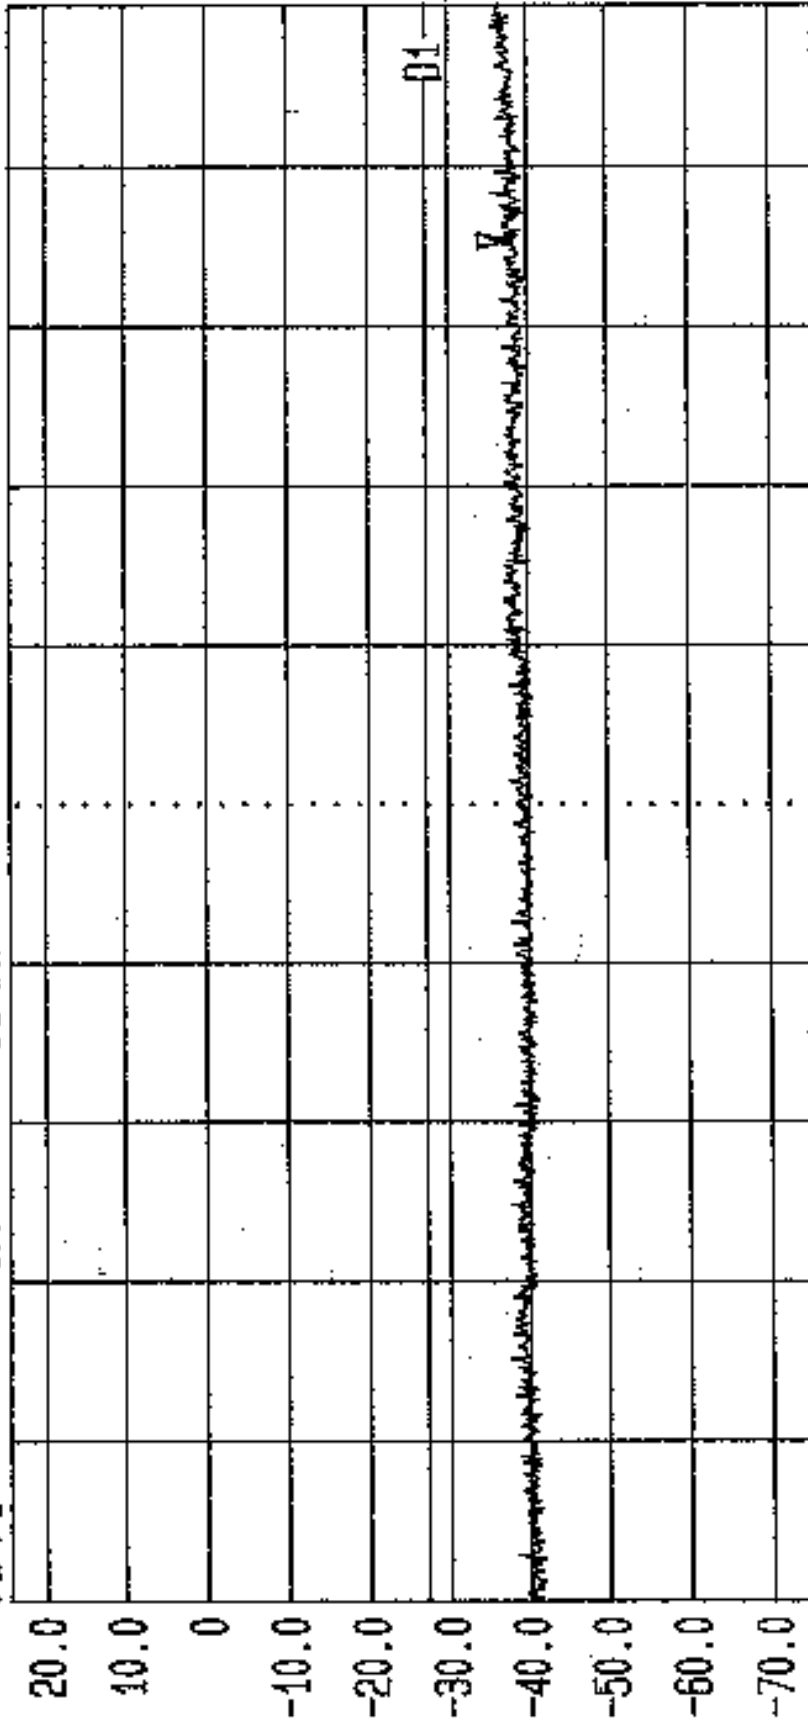


Start 4 GHz
 Span 1 GHz
 Center 4.5 GHz
 Sweep 20 ms
 Stop 5 GHz
 Radiated. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit.
 Limit. D1: -27dBm. FCC Part 15.407(b) TX: 5.15-5.25GHz. Top Chan. GPH/38658/JD04/095

LVL OFF
 Date 29.Mar.'99 Time 12:34:33
 Ref.Lvl Marker -91.3 dBm/Hz
 28.00 dBm 5.1951 GHz
 F1 5.250000000000 GHz D1
 F2 OFF D2
 F2-F1 OFF D1-D2
 Res.Bw 1.0 MHz [3dB] off
 TG.Lvl CF.Stp
 Vid.Bw 1 MHz
 RF.Att 5 dB
 Unit [dBm]

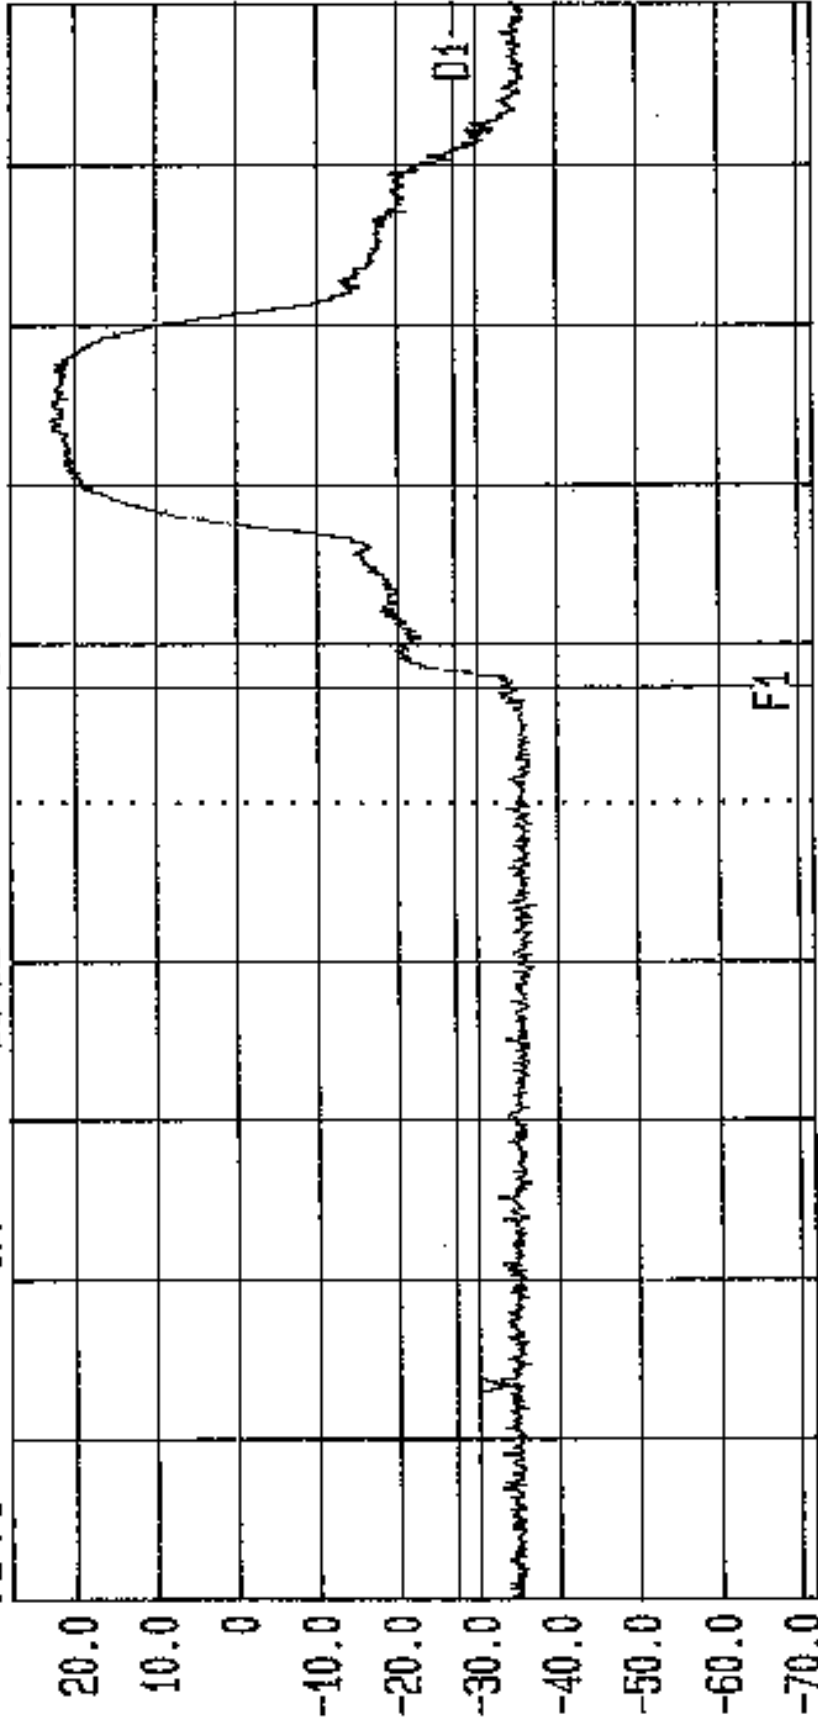

Start 5.1783 GHz Span 125 MHz Center 5.2408 GHz Sweep 20 ms Stop 5.3033 GHz
 Radiated. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit.
 Limit. D1: -27dBm. FCC Part 15.407 (b) TX: 5.25-5.35GHz. Bott Chan. GPH/38658/J004/096

LVLOFF
 Date 29.Mar.'99 Time 12:40:37
 Ref.Lvl Marker -92.3 dBm/Hz
 28.00 dBm 5.2036 GHz
 F1 5.250000000000 GHz D1
 F2 OFF D2
 F2-F1 OFF D1-D2
 Res.BW 1.0 MHz [3dB] Vid.BW 1 MHz
 TG.Lvl Off
 CF.Stp 12.500 MHz RF.Att 5 dB
 Unit [dBm]
 -27.00 dBm
 OFF
 OFF

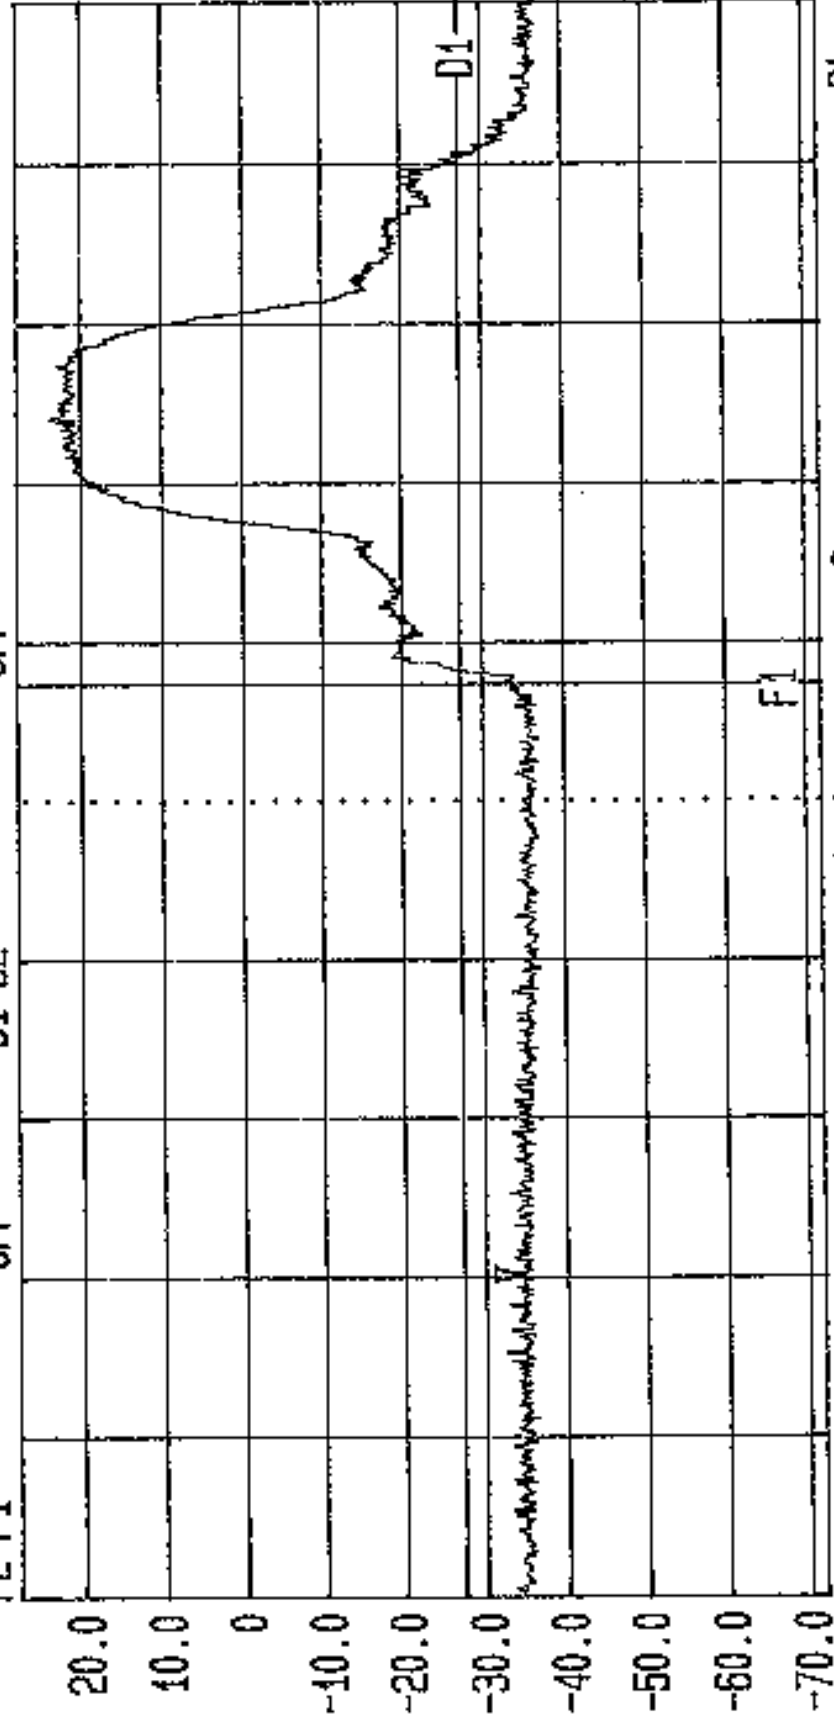


Start 5.1783 GHz Span 125 MHz Center 5.2408 GHz Sweep 20 ms Stop 5.3033 GHz
 Radiated, Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit.
 Limit: Di: -27dBm, FCC Part 15.407(b) TX: 5.25-5.35GHz, Bott Chan. GPH/38658/JD04/097

LVLOFF
 Date 29.Mar.'99 Time 12:46:35
 Ref.Lvl -94.1 dBm/Hz
 Marker 5.0404 GHz
 28.00 dBm
 F1 OFF D1
 F2 OFF D2
 F2-F1 OFF D1-D2
 Res.BW 1.0 MHz [3dB] off
 TG.Lvl 20.000 MHz
 CF.Stp
 Vid.BW 1 MHz
 RF.Att 5 dB
 Unit [dBm]
 -27.00 dBm
 OFF
 OFF

Start	Span	Center	Sweep	Stop
5 GHz	200 MHz	5.1 GHz	20 ms	5.2 GHz
20.0				
10.0				
0				
-10.0				
-20.0				
-30.0				-01
-40.0				
-50.0				
-60.0				
-70.0				


Radiated, Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit.
 Limit. D1: -27dBm. FCC Part 15.407(b) TX: 5.25-5.35GHz. Bott Chan. 6PH/38658/JD04/098

LVLOFF
 Date 29.Mar.'99 Time 12:52:21
 Ref.Lvl Marker -29.31 dBm
 28.00 dBm 5.8195 GHz
 F1 5.350000000000 GHz D1
 F2 OFF D2
 F2-F1 OFF D1-D2
 Res.Bw 1.0 MHz [3dB] off
 TG.Lvl 70.000 MHz
 CF.Stp
 Vid.Bw 1 MHz
 AF.Att 5 dB
 Unit [dBm]
 -27.00 dBm
 OFF
 OFF

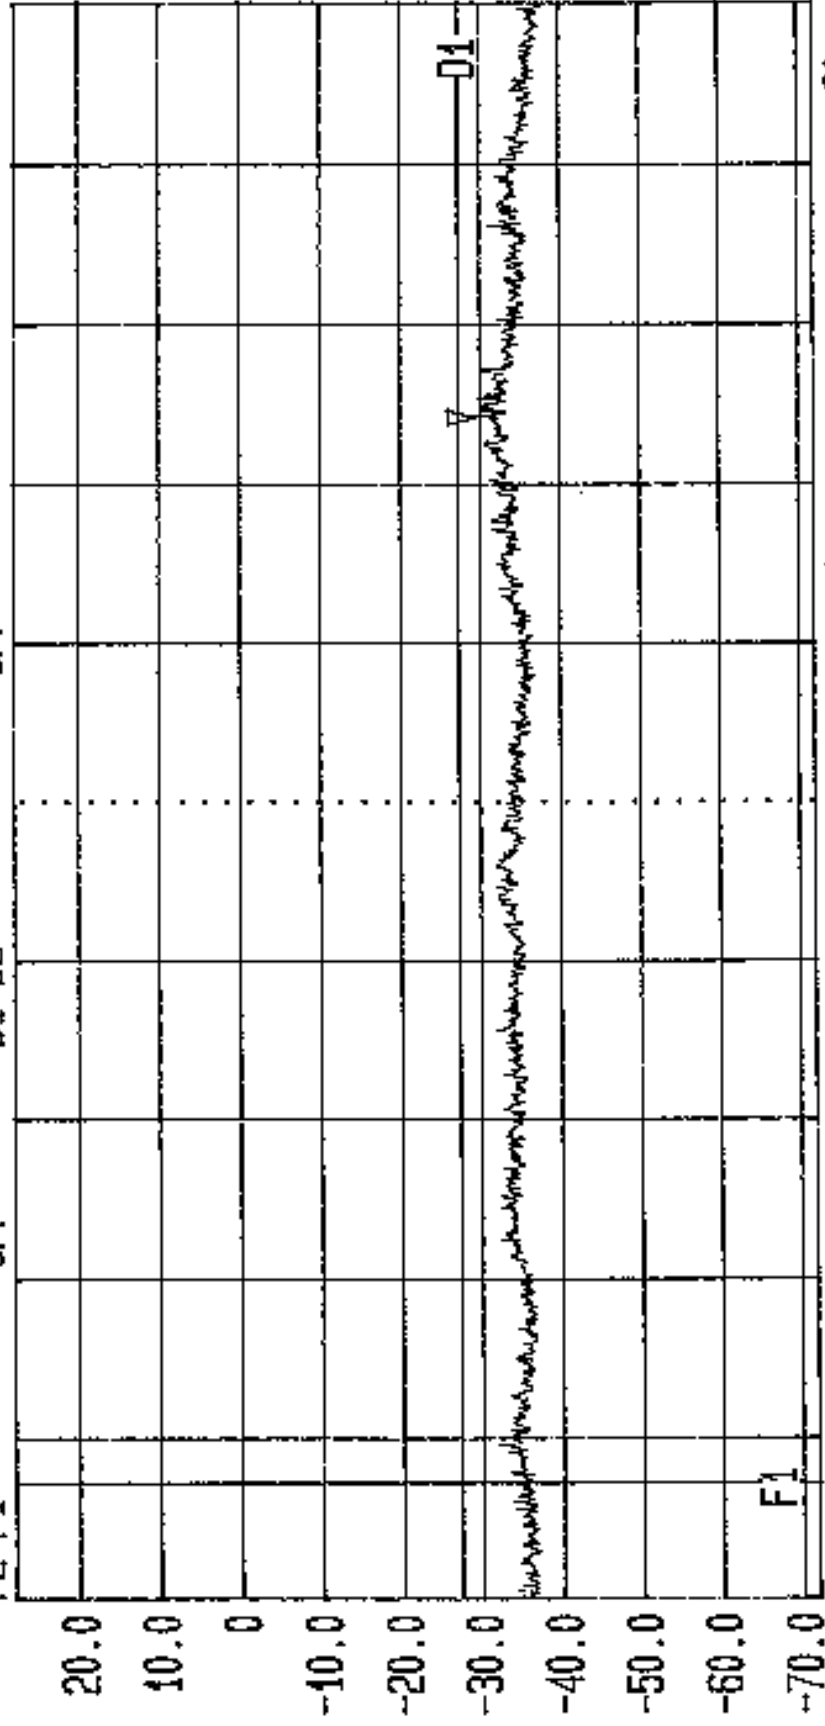


Radiated. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit.
 Limit. D1: -27dBm. FCC Part 15.407 (b) TX: 5.25-5.35GHz. Bott Chan. GPH/38658/J004/099

LVLOFF
 Date 29.Mar.'99 Time 12:58:38
 Ref.Lvl -87.1 dBm/Hz
 28.00 dBm
 F1 OFF D1
 F2 OFF D2
 F2-F1 OFF D1-D2
 Res.Bw 1.0 MHz [3dB]
 TG.Lvl off
 CF.Stp 100.000 MHz
 Vid.Bw 1 MHz
 RF.Att 5 dB
 Unit [dBm]
 -27.00 dBm
 OFF
 OFF

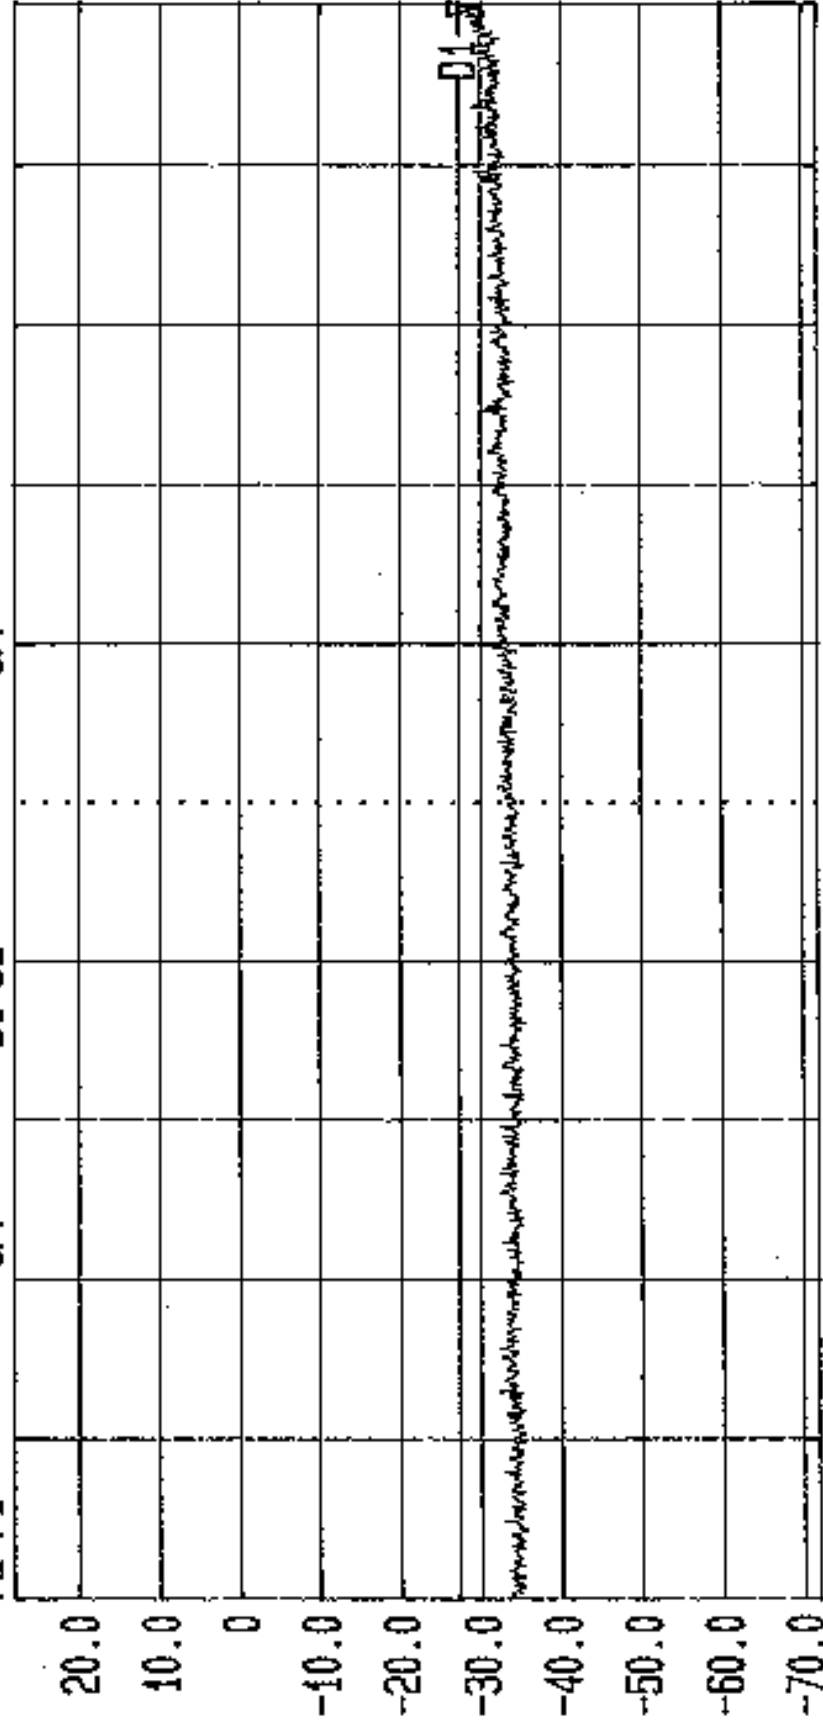


Start 4 GHz
 Span 1 GHz
 Center 4.5 GHz
 Sweep 20 ms
 Stop 5 GHz
 Radiated. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit.
 Limit. D1: -27dBm. FCC Part 15.407 (b) TX: 5.25-5.35GHz. Bott Chan. GPH/38658/JD04/100

LVLOFF
 Date 29.Mar.'99 Time 13:27:24
 Ref.Lvl Marker -94.1 dBm/Hz
 28.00 dBm 5.35027 GHz
 F1 5.350000000000 GHz D1
 F2 OFF D2
 F2-F1 OFF D1-D2
 Res.BW 1.0 MHz [3dB] off
 TG.Lvl CF.Stp
 Vid.Bw 1 MHz
 RF.Att 5 dB
 Unit [dBm]
 -27.00 dBm
 OFF
 OFF

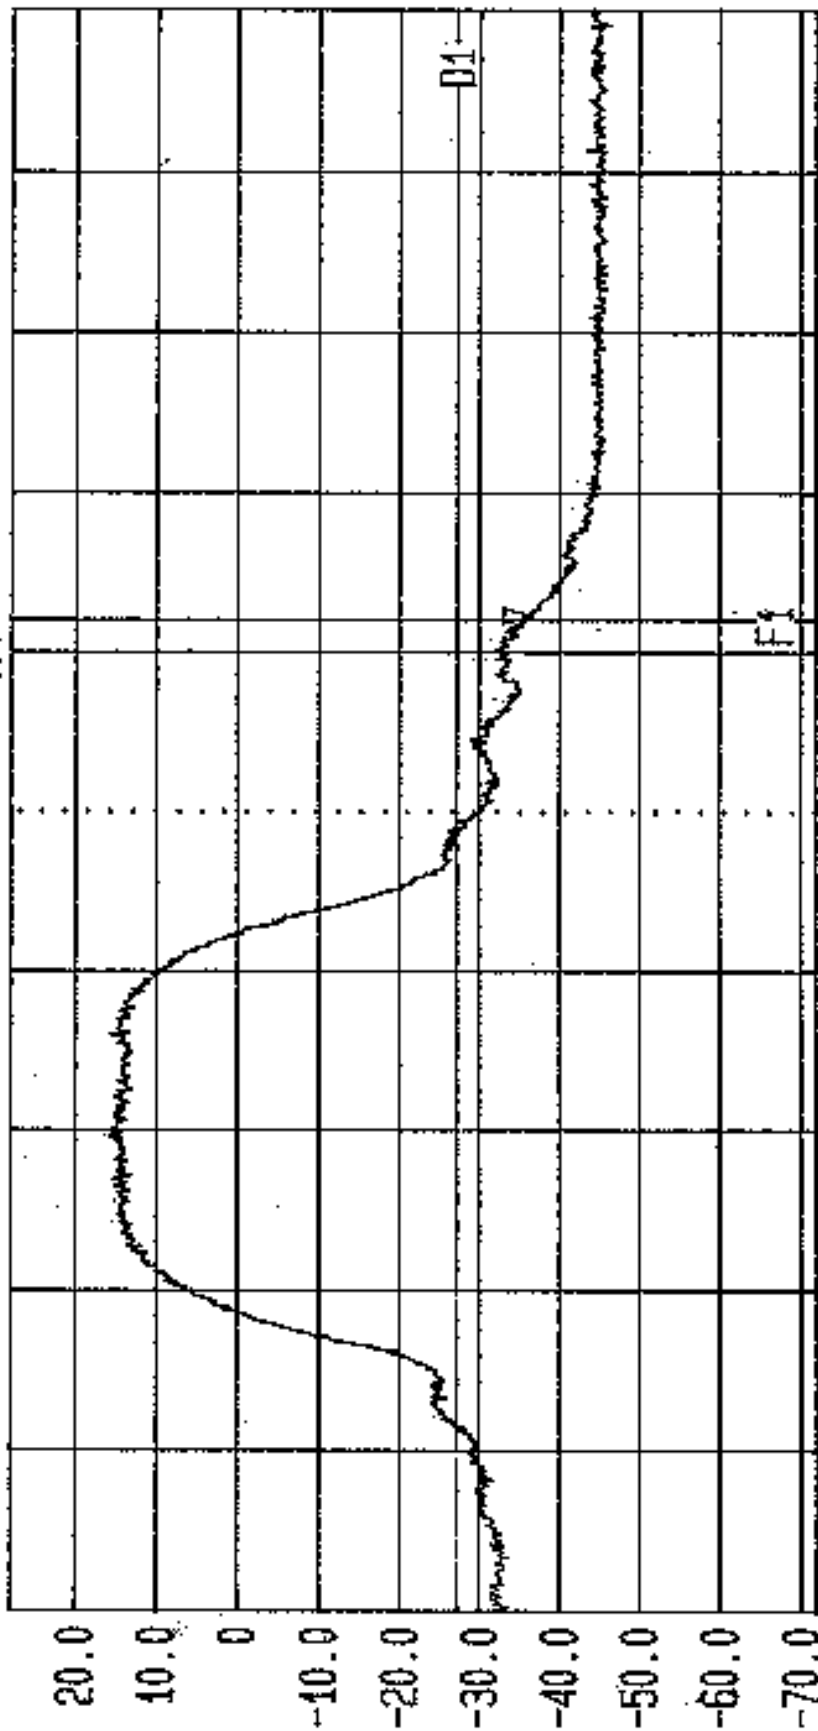


Start 5.31124 GHz Span 62.5 MHz Center 5.34249 GHz Sweep 20 ms Stop 5.37374 GHz
 Radiated. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit.
 Limit. D1: -27dBm. FCC Part 15.407 (b) TX: 5.25-5.35GHz. Top Chan. GPH/3865B/JD04/101

LVLOFF
 Date 29.Mar.'99 Time 13:33:27
 Ref.Lvl Marker -93.6 dBm/Hz
 28.00 dBm 5.35027 GHz
 F1 5.350000000000 GHz D1
 F2 OFF D2
 F2-F1 OFF D1-D2
 Res.Bw 1.0 MHz [3dB] off
 TG.Lvl CF.Stp
 Vid.Bw 1 MHz
 RF.Att 5 dB
 Unit [dBm]
 -27.00 dBm
 OFF
 OFF

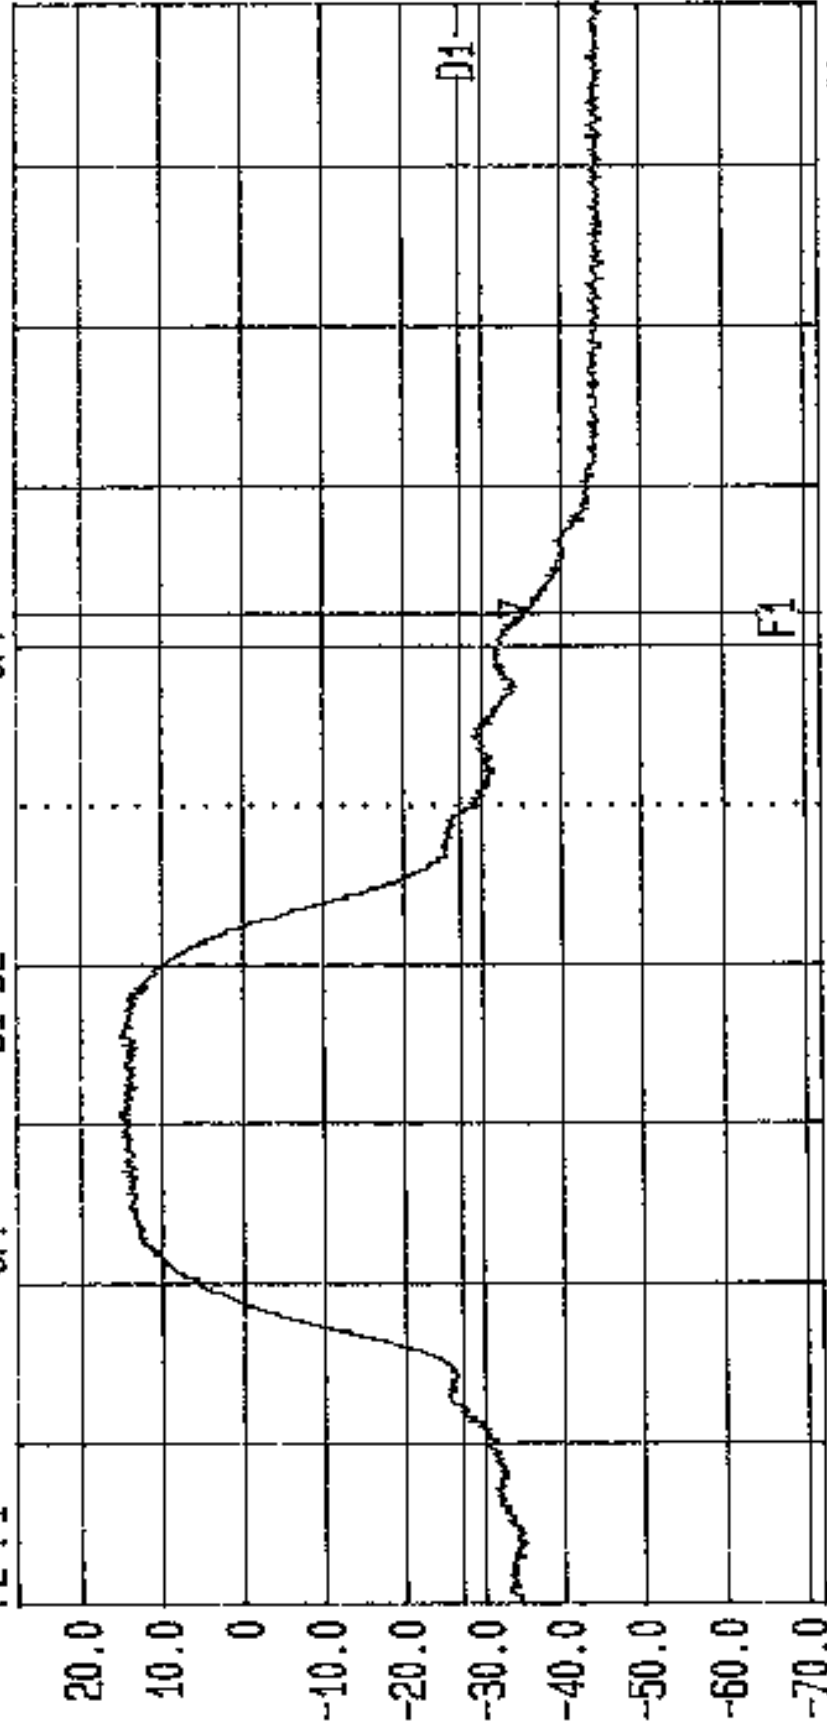


Start 5.31124 GHz Span 62.5 MHz Center 5.34249 GHz Sweep 20 ms Stop 5.37374 GHz
 Radiated, Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit.
 Limit, D1: -27dBm, FCC Part 15.407(b) TX: 5.25-5.35GHz, Top Chan. GPH/38658/JD04/102

LVLOFF
 Date 29.Mar.'99 Time 13:40:20
 Ref.Lvl 28.00 dBm
 Marker -88.5 dBm/Hz
 5.8151 GHz
 F1 OFF D1
 F2 OFF D2
 F2-F1 OFF D1-D2
 Res.BW 1.0 MHz [3dB]
 TG.Lvl Off
 CF.Stp 64.000 MHz
 Vid.BW 1 MHz
 RF.Att 5 dB
 Unit [dBm]
 -27.00 dBm
 Off
 Off

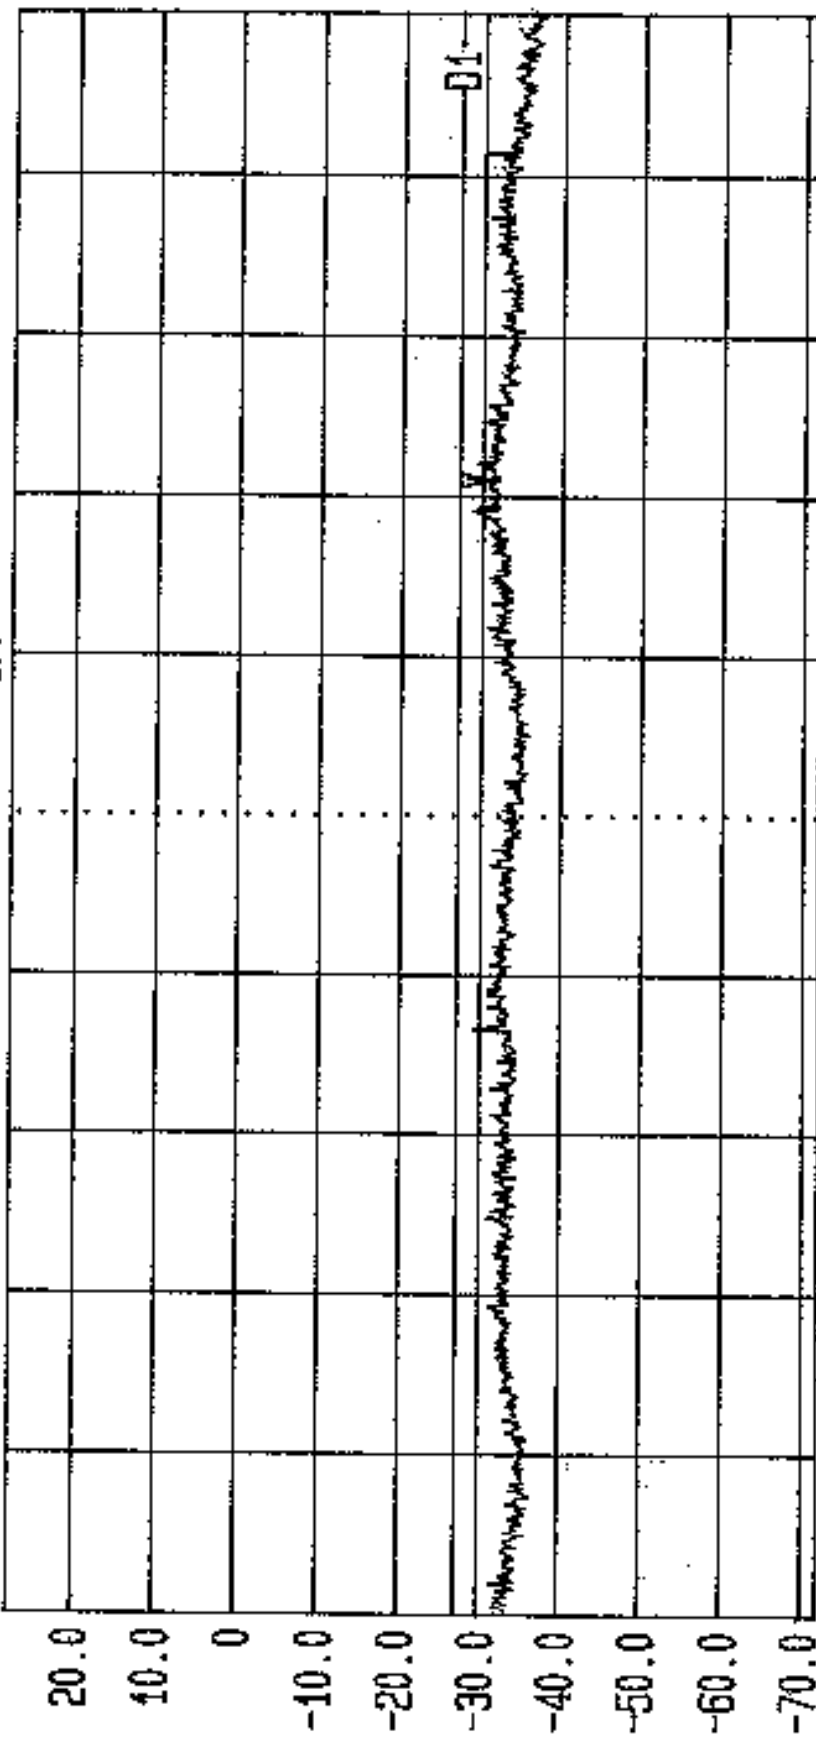


Start 5.36 GHz Span 640 MHz Center 5.68 GHz Sweep 20 ms Stop 5 GHz
 Radiated. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit.
 Limit, Di: -27dBm. FCC Part 15.407 (b) TX: 5.25-5.35GHz. Top Chan. 6PH/39658/JD04/103

LVLOFF
 Date 29.Mar.'99 Time 13:45:56
 Ref.Lvl Marker -92.3 dBm/Hz
 28.00 dBm 5.2104 GHz
 F1 5.250000000000 GHz D1
 F2 OFF D2
 F2-F1 OFF D1-D2
 Res.Bw 1.0 MHz [3dB] 1 MHz
 TG.Lvl off
 CF.Stp 32.000 MHz
 RF.Att 5 dB
 Unit [dBm]
 Vid.Bw
 -27.00 dBm
 OFF
 OFF

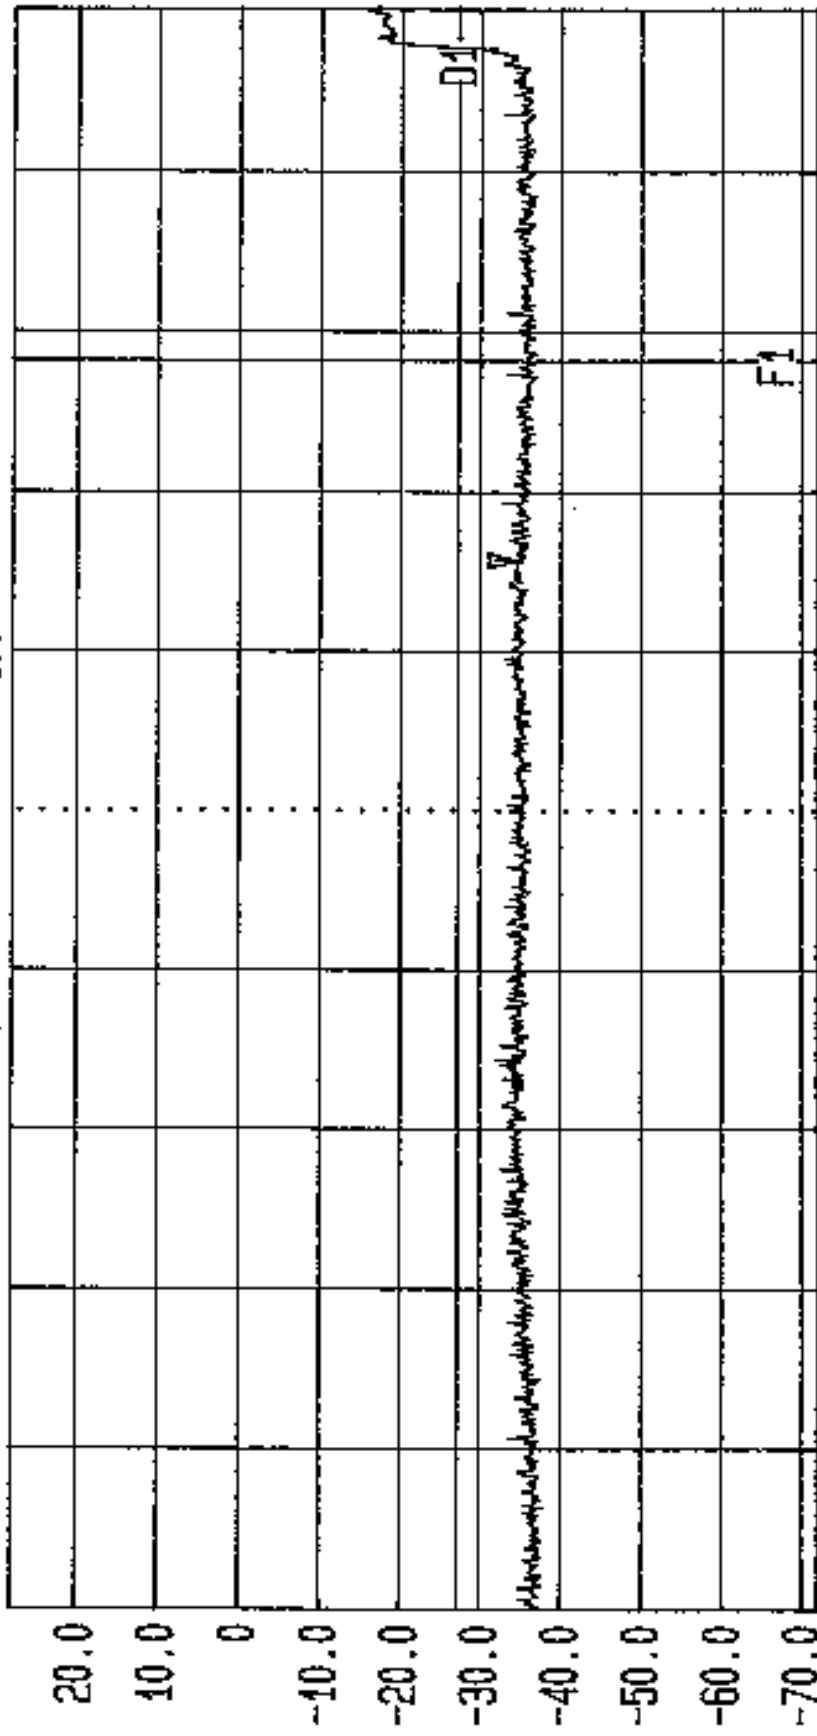

Start 5 GHz
 Span 320 MHz
 Center 5.16 GHz
 Sweep 20 ms
 Stop 5.32 GHz
 Radiated. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit.
 Limit. D1: -27dBm. FCC Part 15.407(b) TX: 5.25-5.35GHz. Top Chan. GPH/38658/JD04/104

LVLOFF
 Date 29.Mar.'99 Time 14:29:45
 Ref.Lvl 24.50 dBm
 Marker -93.1 dBm/Hz
 5.0000 GHz
 F1 OFF D1
 F2 OFF D2
 F2-F1 OFF D1-D2
 Res.Bw 1.0 MHz [3dB]
 100.000 MHz
 1 MHz
 Vid.Bw 0 dB
 AF,Att Unit
 --27.00 dBm
 OFF
 OFF

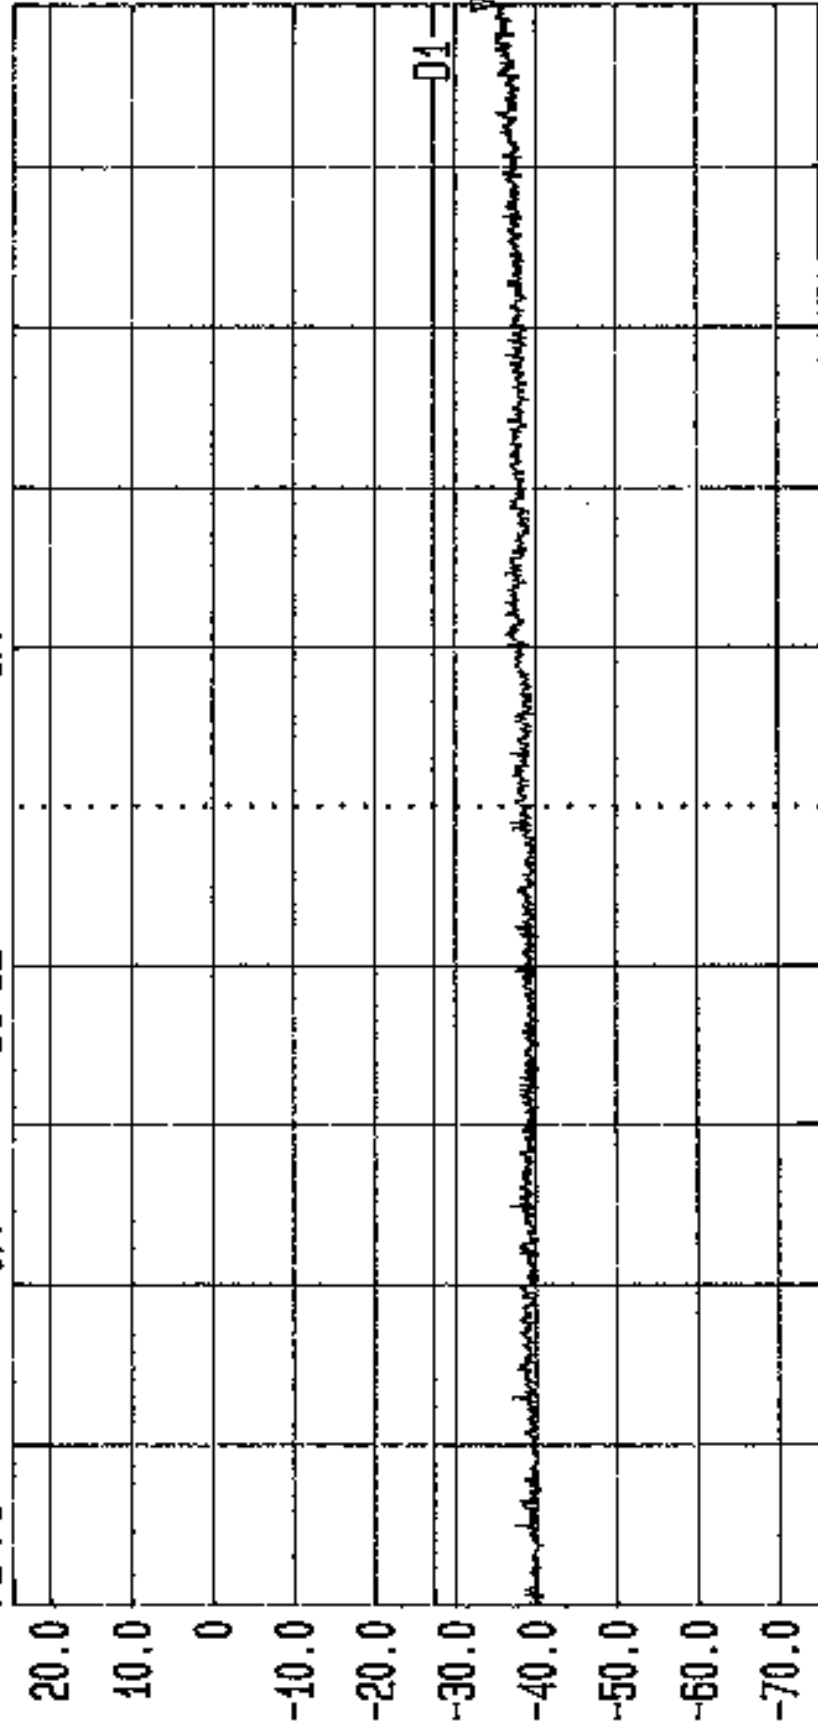

Start 4 GHz
 Stop 5 GHz
 Span 1 GHz
 Center 4.5 GHz
 Sweep 20 ms
 Radiated. Tested by HFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit.
 Limit: D1: -27dBm. FCC Part 15.407 (b) TX: 5.25-5.35GHz. Top Chan. 6PH/38658/J004/105


LVLOFF

Date 29.Mar.'99 Time 13:59:01
 Ref.Lvl Marker -93.2 dBm/Hz
 34.50 dBm 5.72493 GHz

F1 5.7250000000 GHz D1
 F2 5.7150000000 GHz D2
 F2-F1 10.00000000 MHz D1-D2

Res.Bw 1.0 MHz [3dB]
 TG.Lvl off
 CF.Stp 6.250 MHz
 Vid.Bw 1 MHz
 RF.Att 10 dB
 Unit [dBm]

OFF
 OFF
 OFF

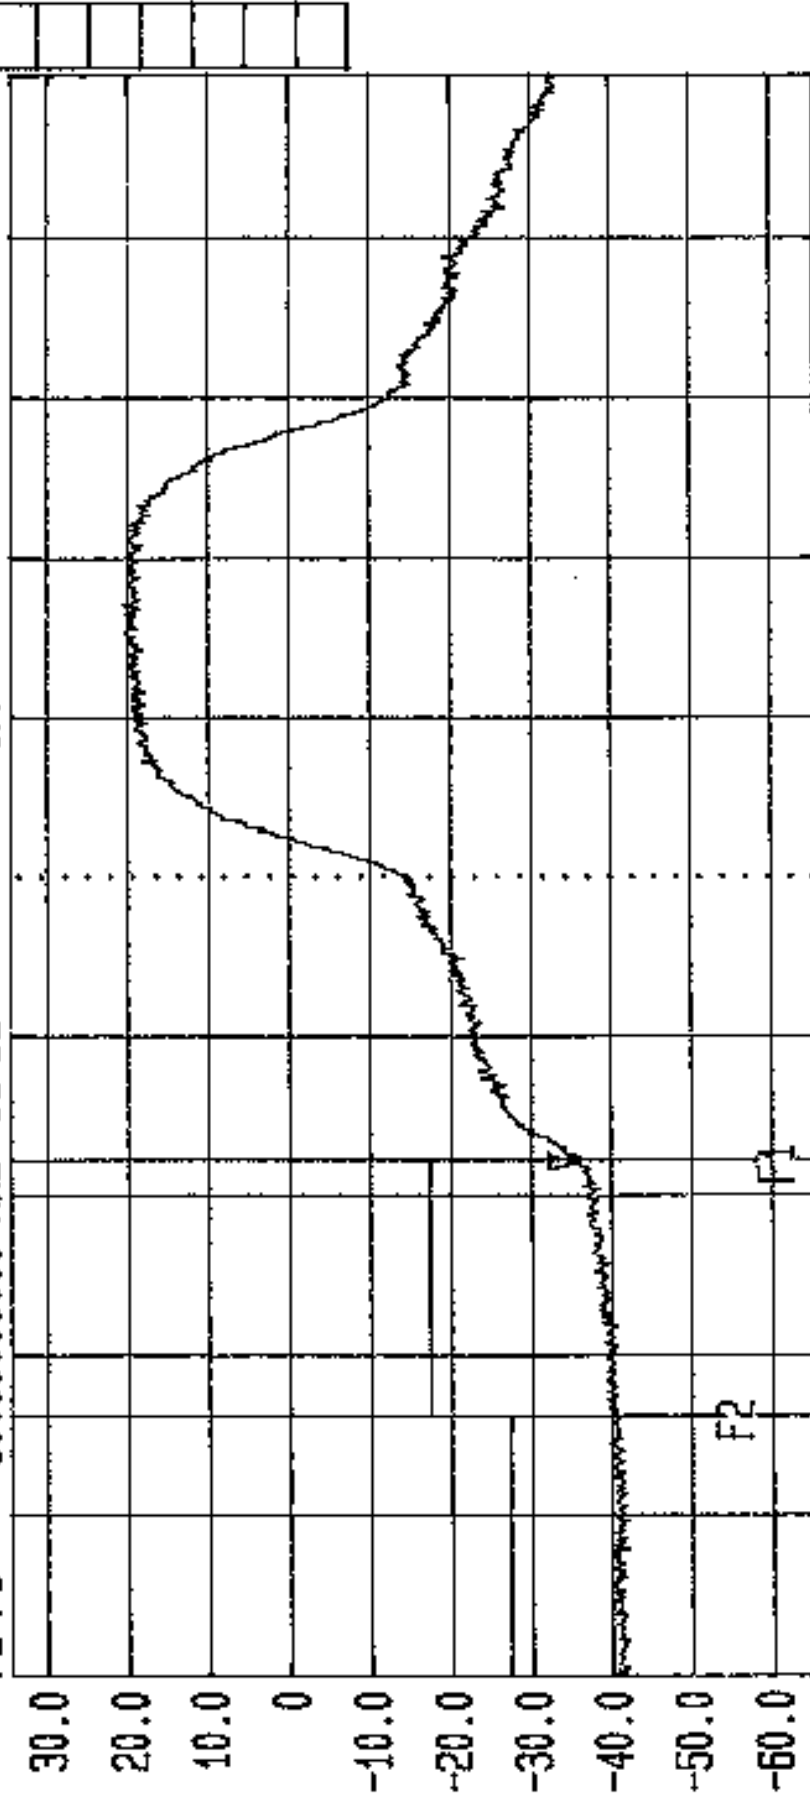

Start 5.70486 GHz Span 62.5 MHz Center 5.73611 GHz Sweep 20 ms Stop 5.76736 GHz

Radiated, Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit.
 Limit. D1: -27dBm. FCC Part 15.407(b) TX: 5.725-5.825GHz. Bot Chan. 6PH/38658/J004/106

TL
1

1 MHz

Date 29 Mar '99 Time 14:05:29

Time 14:05:29

Ref. Lvl. Marker

-94.7 dBm/Hz

34.50 dBm

5.725000000 GHz D1

GHZ D1

F2 5.715000000 GHz 02

402
403

F2-F4	10.0000000 MHz	D1-D2
-------	----------------	-------

MHZ **D1-D2**

Has. Bm.

19

65. 40

1.0 MHz [3dB]

340

5.250 MHz

Vid: BW

HF. Att

Unit


OFF

站

40



1	2
---	---

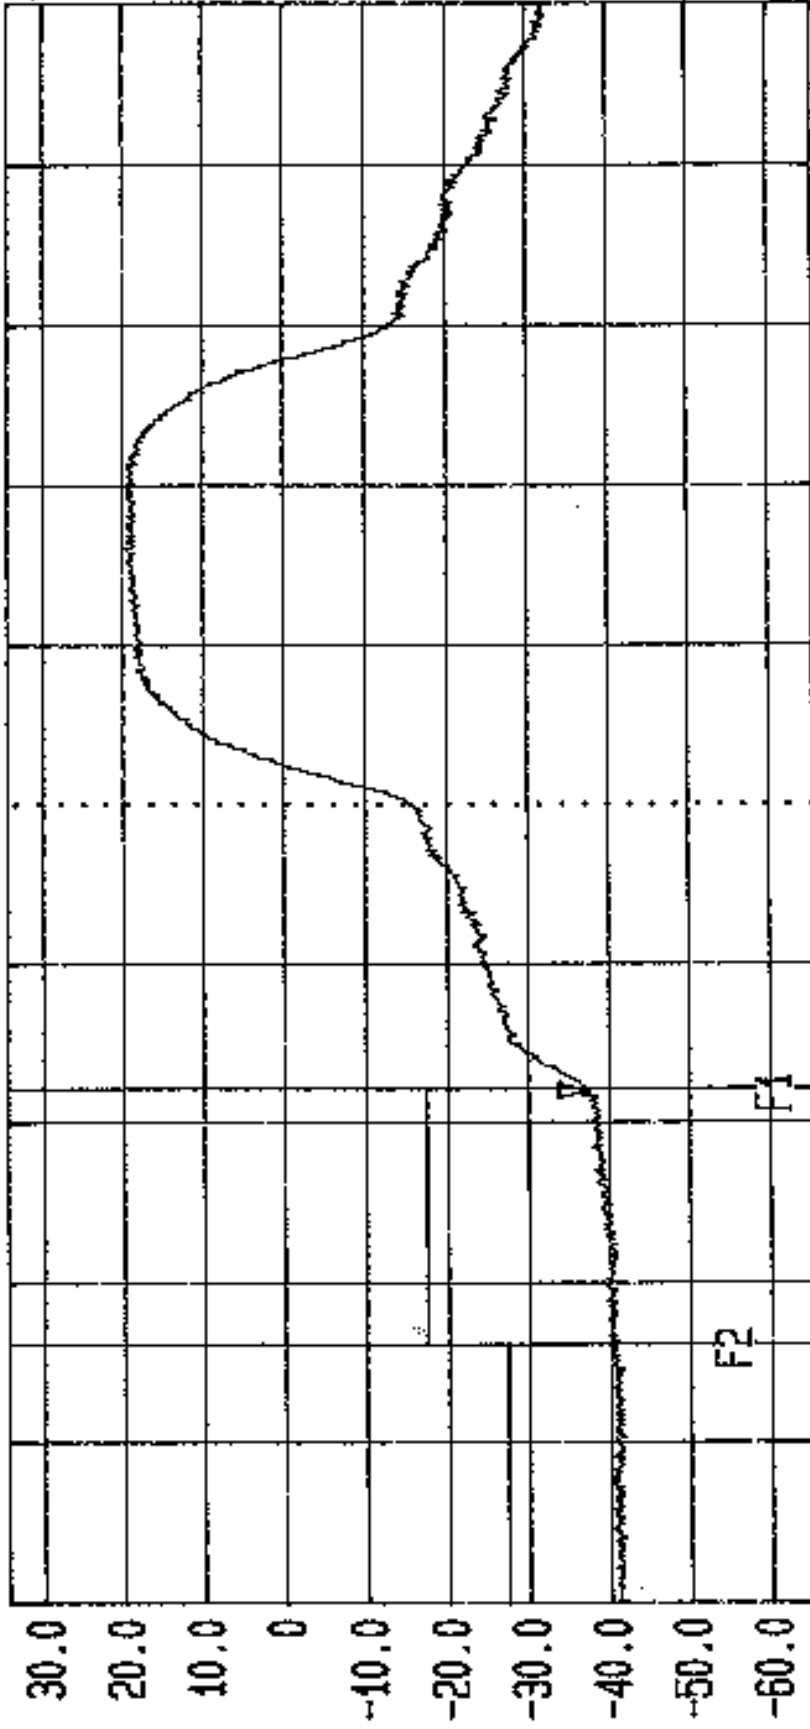

Start

5.70485 GHz

0205

62-5747

Center

5.73511 GHz

Sweden


2015

0075

5.76736 GHz


Radiated, Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit.
Limit: D1: -27dBm. FCC Part 15.407 (b) TX: 5.725-5.825GHz. Bot Chan. GPH/38658/JD04/107

LVLOFF
 Date 29.Mar.'99 Time 14:12:03
 Ref.Lvl Marker -90.5 dBm/Hz
 24.50 dBm 5.6141 GHz
 F1 5.715000000000 GHz D1
 F2 OFF D2
 F2-F1 OFF D1-D2
 Res.BW 1.0 MHz [3dB] Off
 TG.Lvl 71.500 MHz
 CF.Stp Unit
 Vid.Bw 1 MHz
 RF.Att 0 dB
 Unit [dBm]

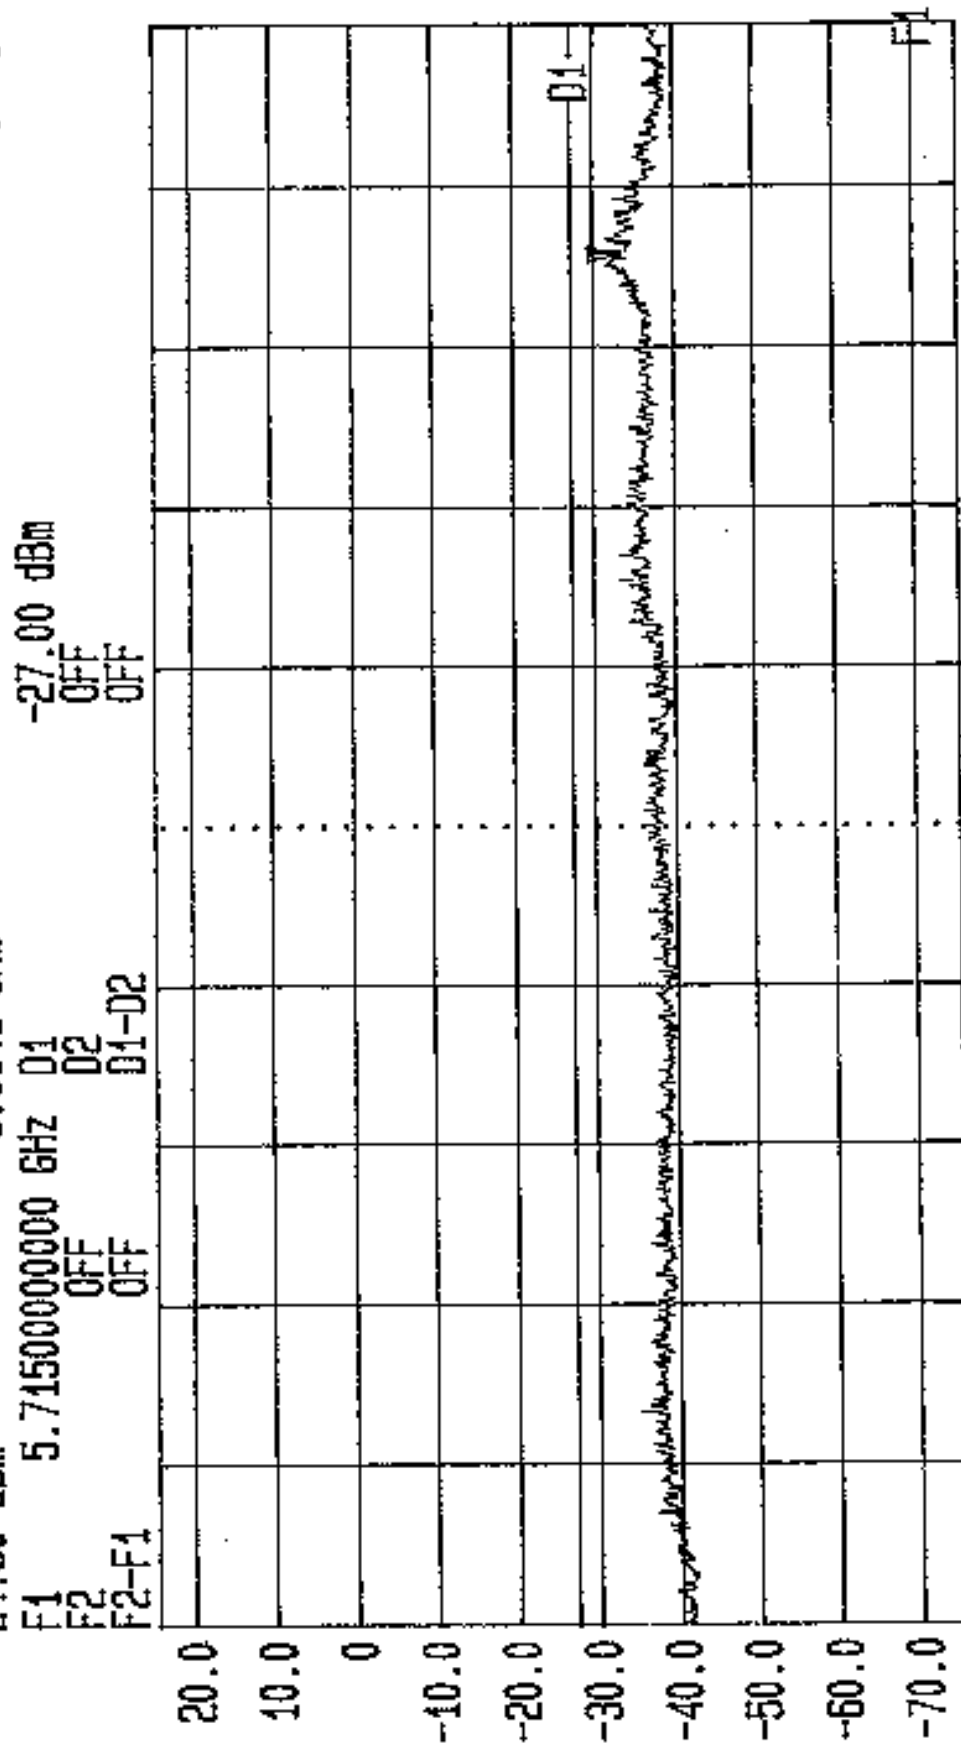

Start 5 GHz
 Span 715 MHz
 Center 5.3575 GHz
 Sweep 20 ms
 Stop 5.715 GHz
 Radiated. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit.
 Limit. D1: -27dBm. FCC Part 15.407 (b) TX: 5.725-5.825GHz. Bot Chan. 6PH/38658/JD04/108


LVLOFF
 Date 29.Mar.'99 Time 14:18:10
 Ref.Lvl Marker -100.5 dBm/Hz
 24.50 dBm
 F1 5.8250000000 GHz D1
 F2 OFF
 F2-F1 OFF
 Res.Bw 1.0 MHz [3dB]
 TG.Lvl off
 CF.Stp 24.000 MHz
 RF.Att 0 dB
 Unit [dBm]

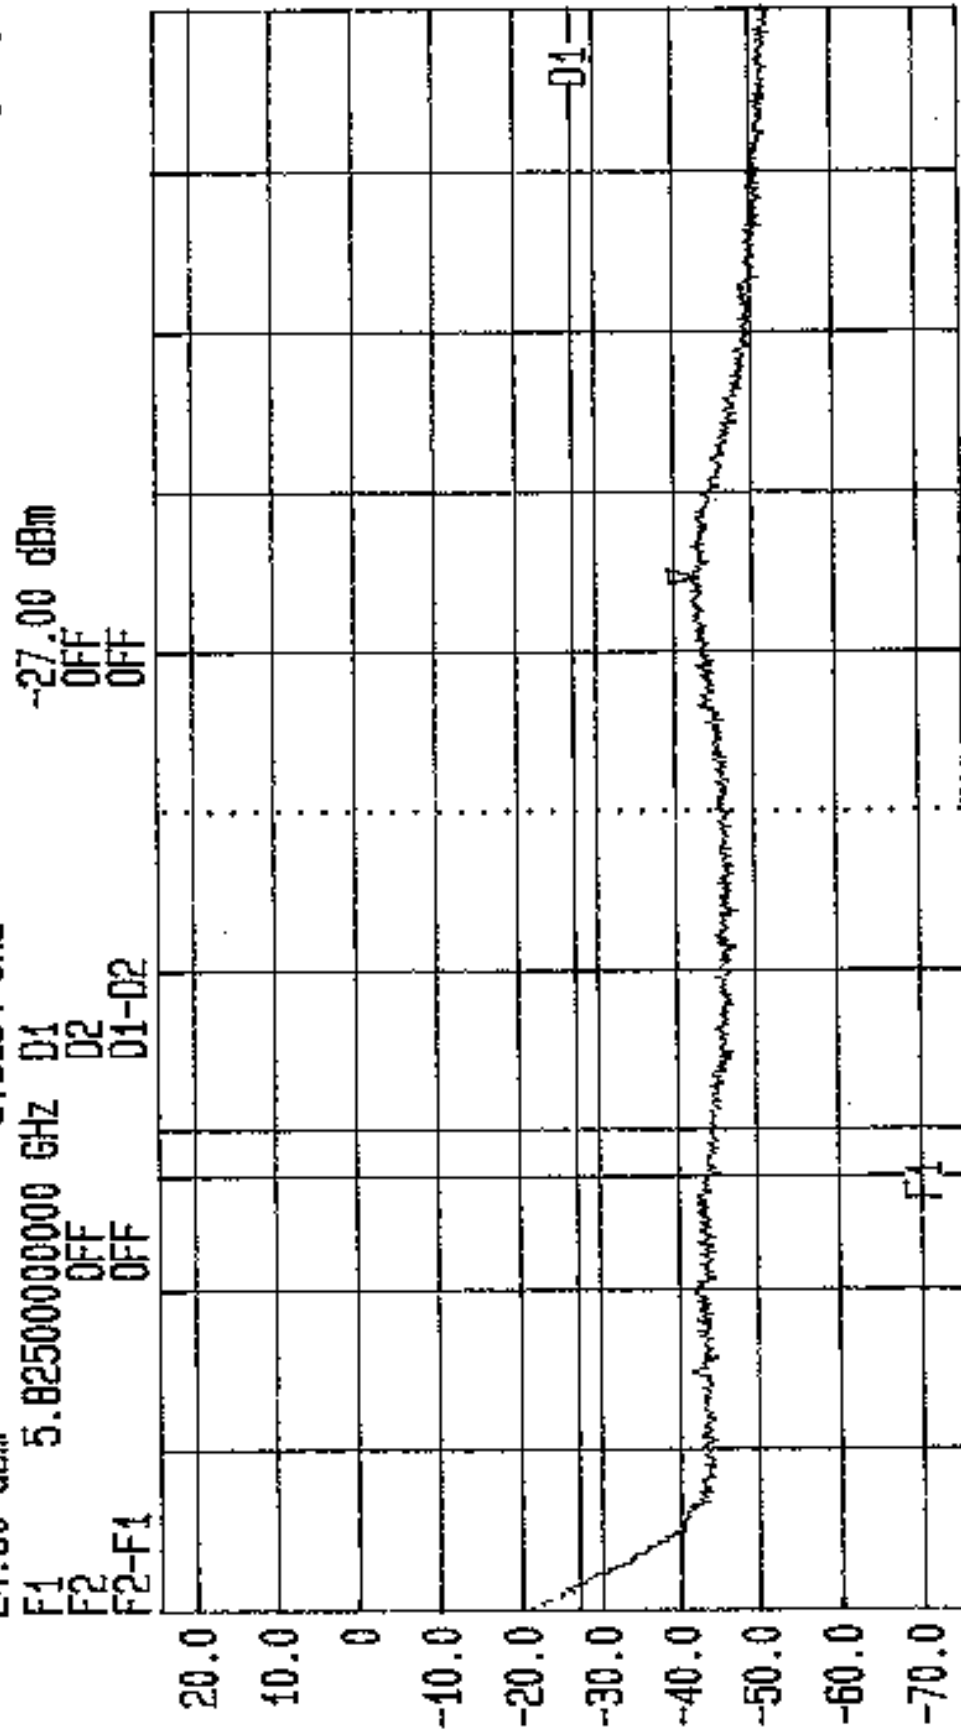

Start 5.76 GHz
 Span 240 MHz
 Center 5.88 GHz
 Sweep 20 ms
 Stop 6 GHz

Radiated. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit.
 Limit. D1: -27dBm. FCC Part 15.407 (b) TX: 5.725-5.825GHz. Bot Chan. 6PH/38658/JD04/109

Date 29.Mar.'99 Time 14:24:12
 Ref.Lvl 24.50 dBm
 Marker -93.0 dBm/Hz
 5.0000 GHz
 F1 OFF D1
 F2 OFF D2
 F2-F1 OFF D1-D2
 Res.Bw 1.0 MHz [3dB]
 TG.Lvl Off
 CF.Stp 100.000 MHz
 Vid.Bw 1 MHz
 RF.Att 0 dB
 Unit [dBm]

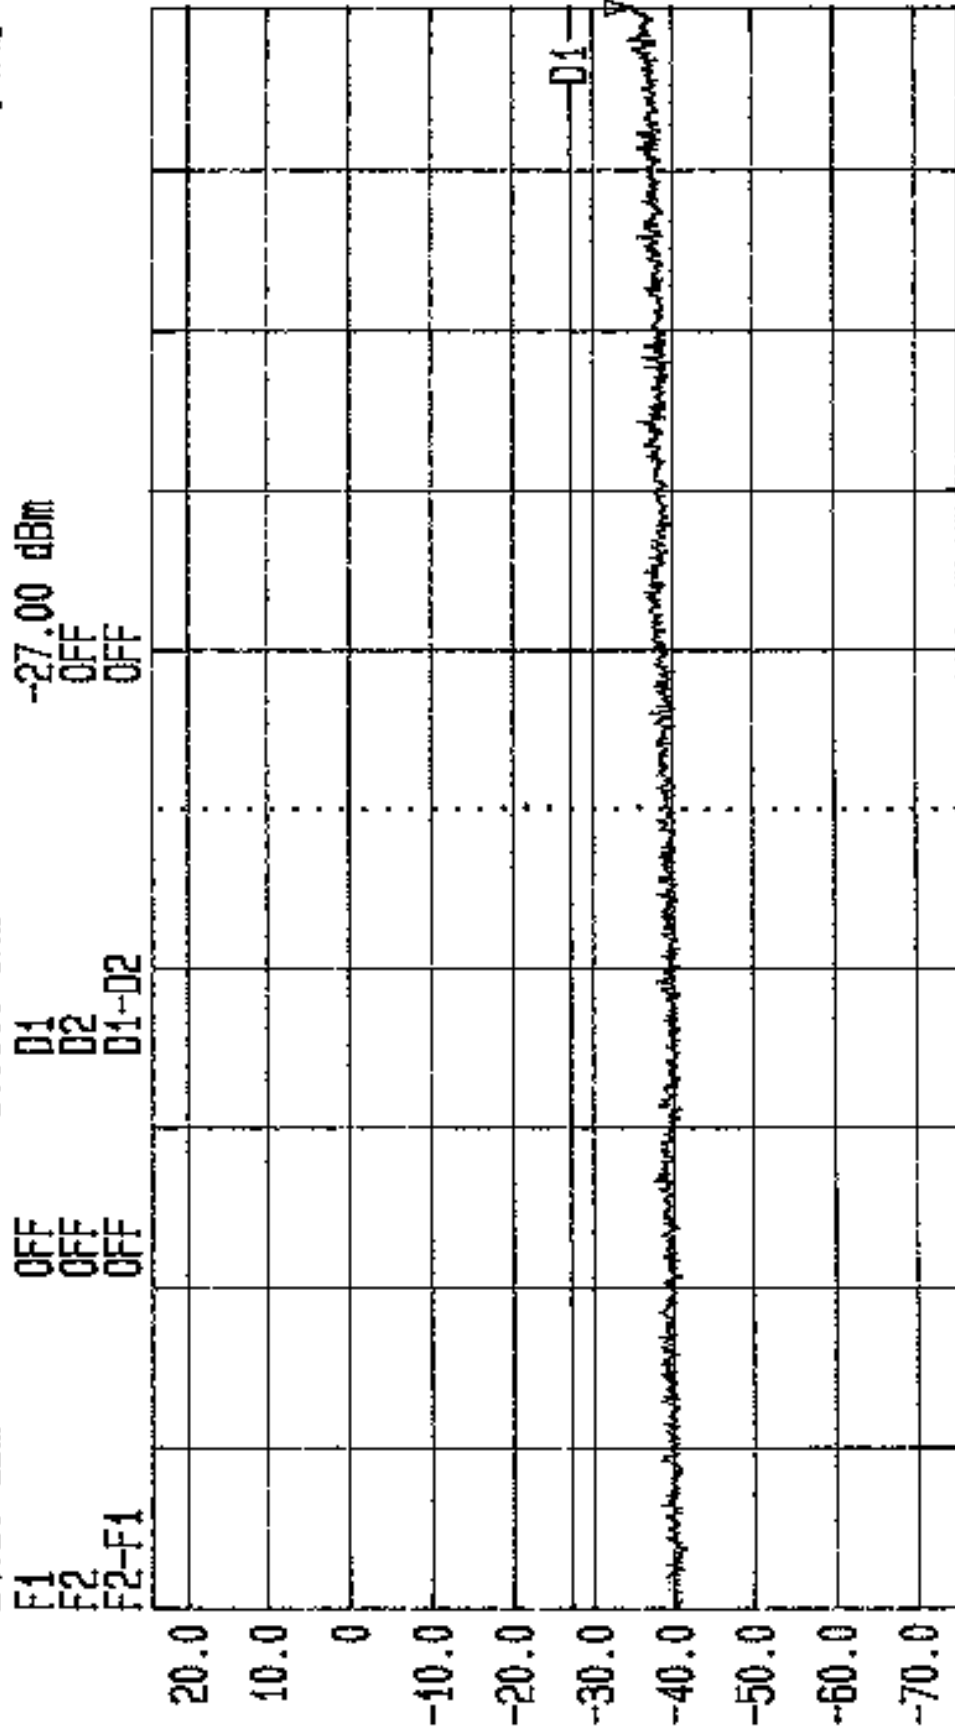

Start 4 GHz
 Span 1 GHz
 Center 4.5 GHz
 Sweep 20 ms
 Stop 5 GHz
 Radiated, Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit.
 Limit: D1: -27dBm. FCC Part 15.407(b) TX: 5.725-5.8256GHz, Bot Chan. GPH/38658/JD04/110

LVLOFF


Date 29.Mar.'99 Time 14:38:19
 Ref.Lvl1 Marker -89.0 dBm/Hz
 34.50 dBm 5.82527 GHz

Res.Bw 1.0 MHz [3dB] 1 MHz
 TG.Lvl1 Off
 CF.Stp 6.250 MHz 10 dB
 RF.Att Unit

F1 5.825000000000 GHz D1
 F2 5.835000000000 GHz D2
 F2-F1 -10.0000000000 MHz D1-D2

OFF
 OFF
 OFF


TL
 1

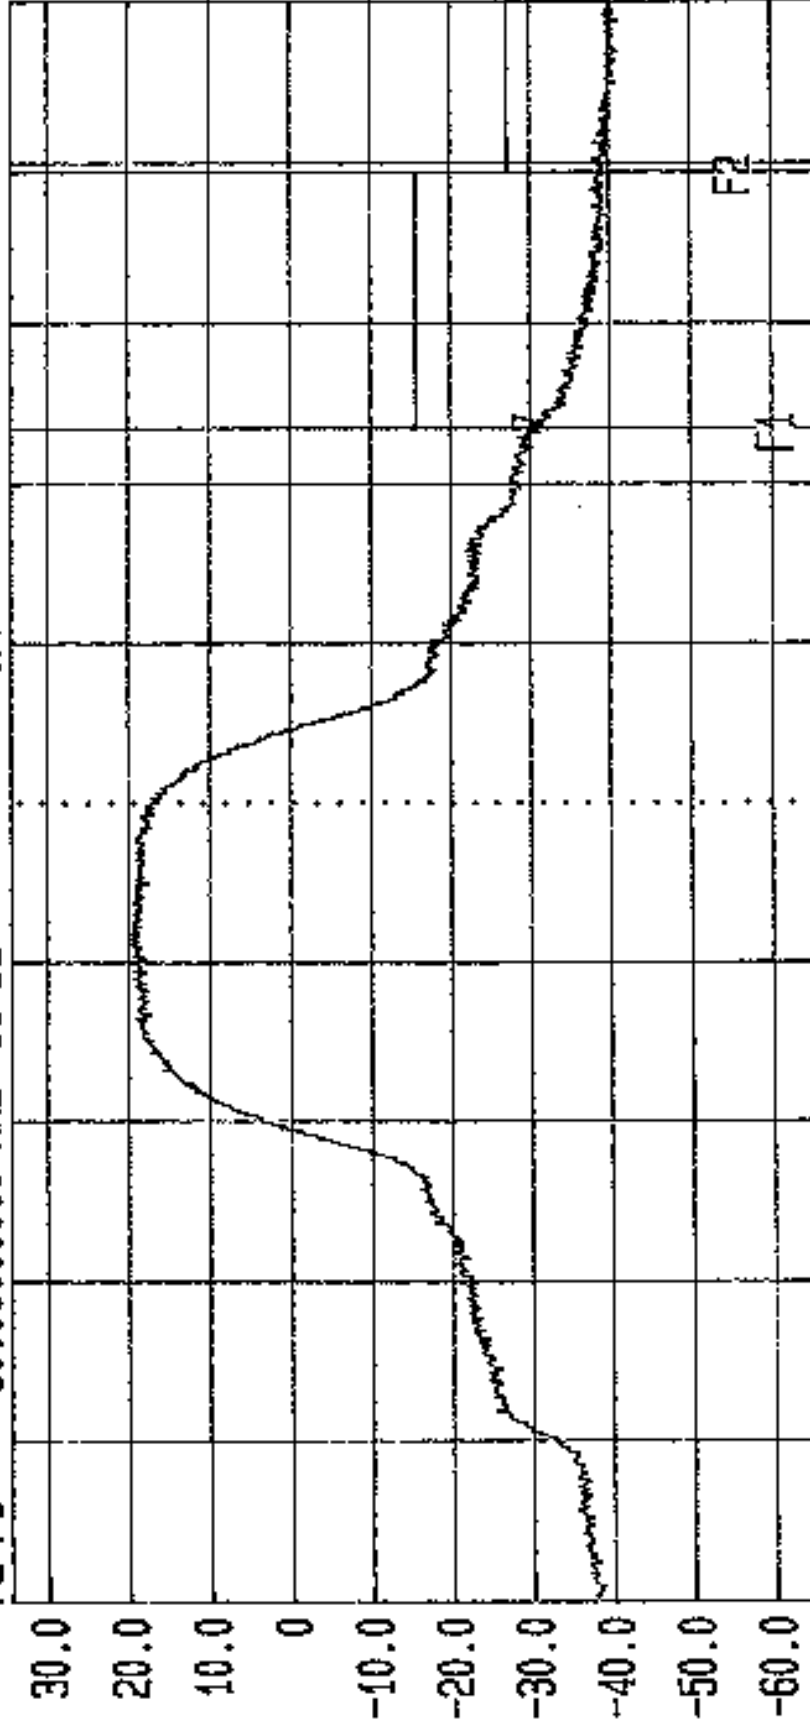

Start 5.77909 GHz Span 62.5 MHz Center 5.81034 GHz Sweep 20 ms Stop 5.84159 GHz
 Radiated, Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit.
 Limit: D1: -27dBm. FCC Part 15.407 (b) TX: 5.725-5.8256GHz. Bot Chan. GPH/38658/JD04/111


LVLOFF
 Date 29.Mar.'99 Time 14:44:40
 Ref.Lvl Marker -87.6 dBm/Hz
 34.50 dBm
 F1 5.8250000000 GHz D1
 F2 5.8350000000 GHz D2
 F2-F1 -10.00000000 MHz D1-D2

Res.BW 1.0 MHz [3dB]
 TG.Lvl Off
 CF.Stp 6.250 MHz
 Vid.BW 1 MHz
 RF.Att 10 dB
 Unit [dBm]

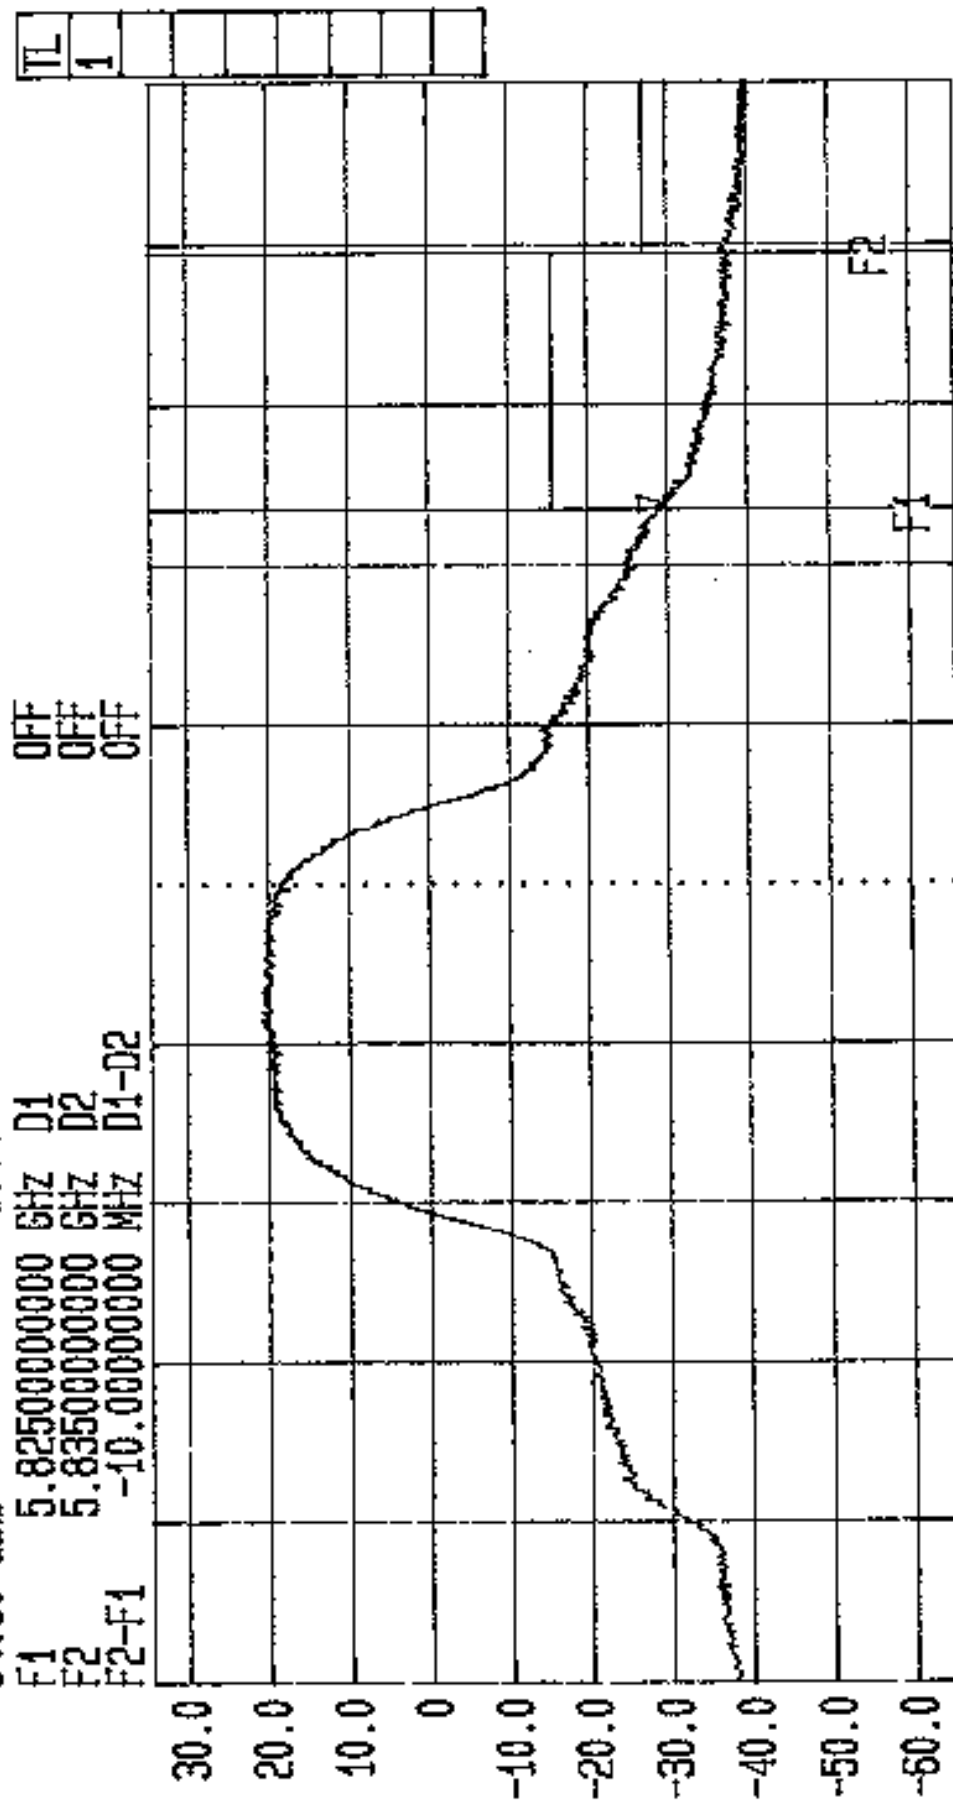


Radiated. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit.
 Limit. D1: -27dBm. FCC Part 15.407(b) TX: 5.725-5.825GHz. Top Chan. GPH/3865B/JD04/112

LVL OFF
 Date 29.Mar.'99 Time 14:50:49
 Ref.Lvl Marker -97.6 dBm/Hz
 24.50 dBm 5.8350 GHz
 F1 5.835000000000 GHz D1
 F2 OFF D2
 F2-F1 OFF D1-D2
 Res.BW 1.0 MHz [3dB] off
 TG.Lvl CF.Stp
 Vid.BW 1 MHz
 HF.Att 0 dB
 Unit [dBm]

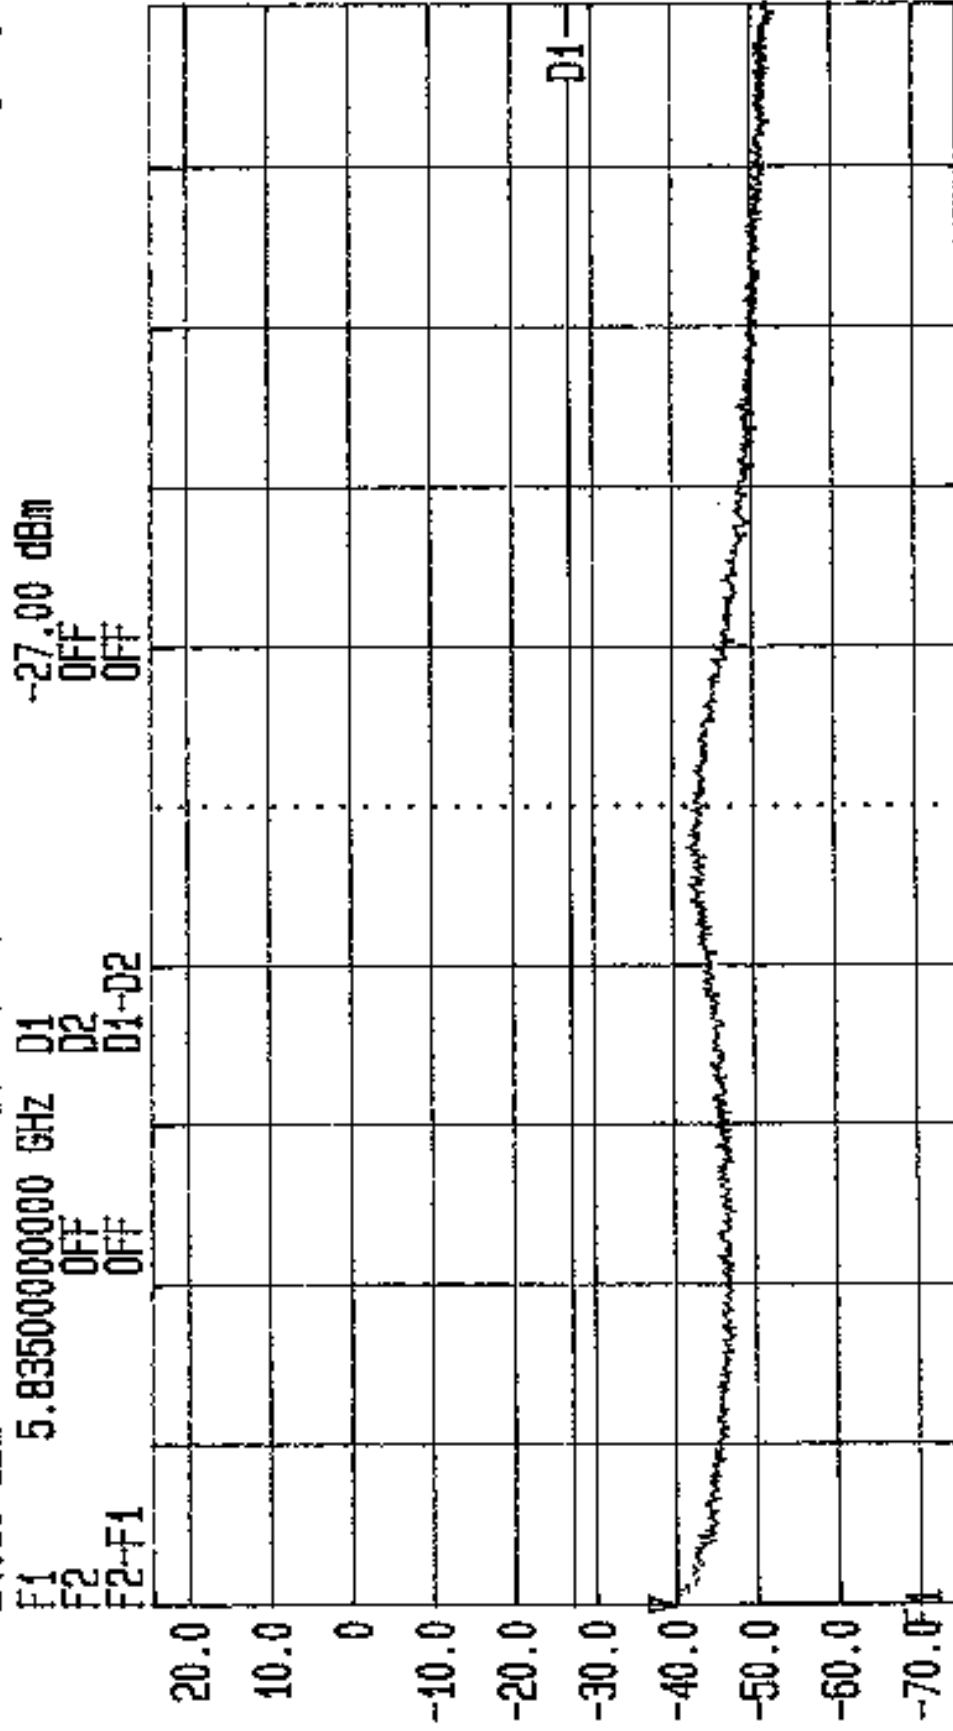

Start 5.835 GHz Stop 6 GHz
 Radiated, Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit.
 Limit, D1: -27dBm, FCC Part 15.407(b) TX: 5.725-5.825GHz. Top Chan. GPH/3855B/JD04/113

LVL OFF
 Date 29.Mar.'99 Time 14:56:49
 Ref.Lvl Marker -90.8 dBm/Hz
 24.50 dBm 5.6136 GHz
 F1 5.725000000000 GHz D1
 F2 OFF D2
 F2-F1 OFF D1-D2
 Res.BW 1.0 MHz [3dB] 1 MHz
 TG.Lvl Off
 CF.Stp 78.000 MHz
 RF.Att 0 dB
 Unit [dBm]
 Vid.Bw
 -27.00 dBm
 OFF
 OFF

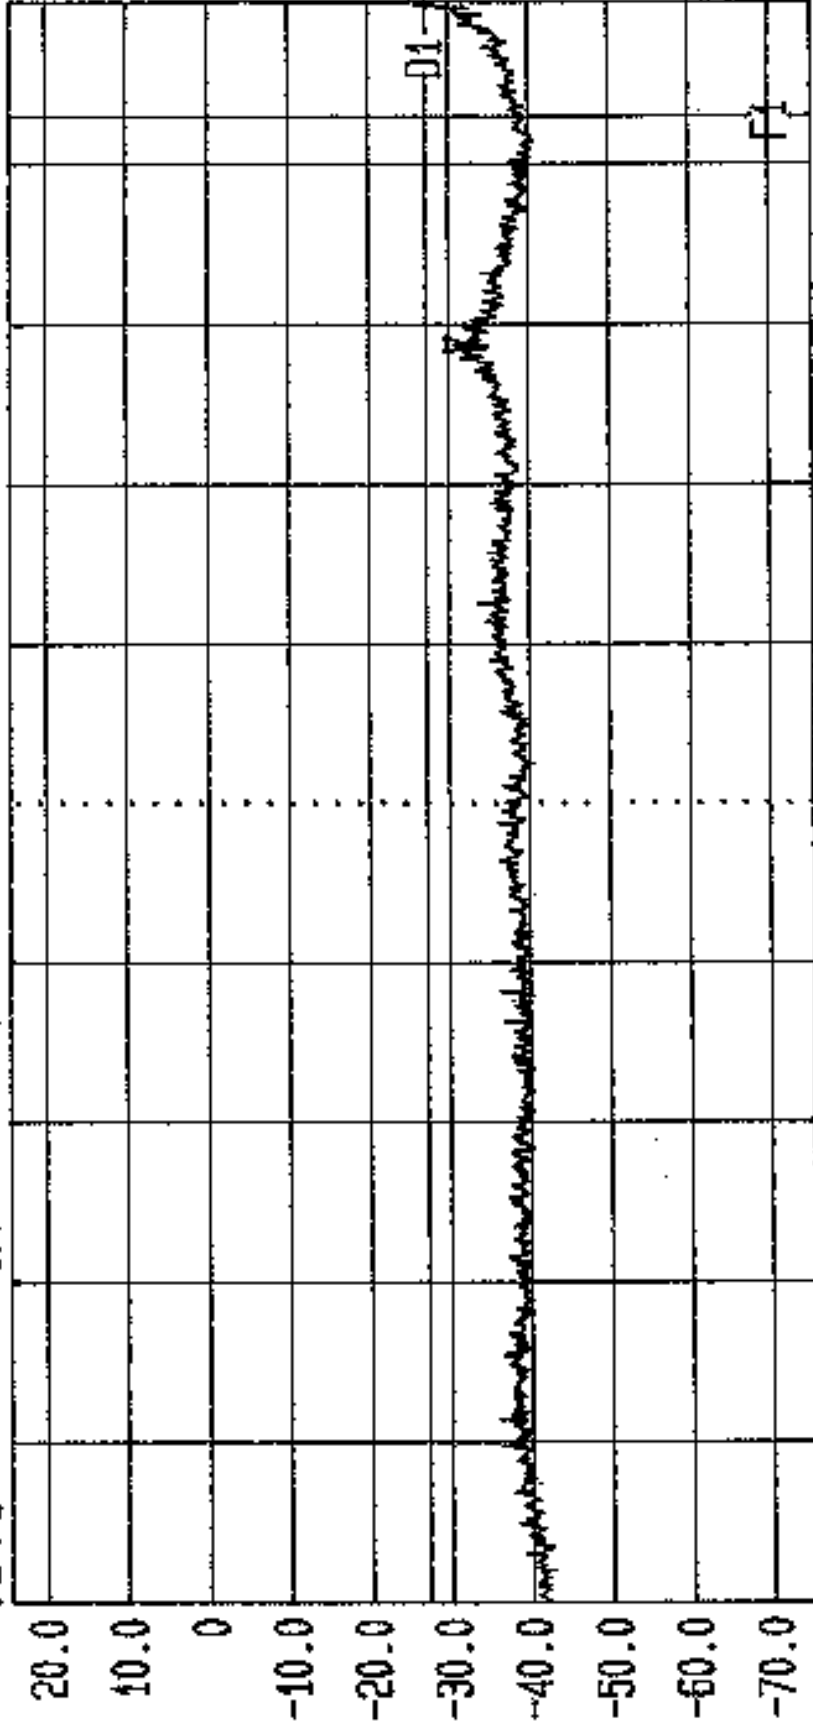

Radiated. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit.
 Limit. D1: -27dBm. FCC Part 15.407 (b) TX: 5.725-5.825GHz. Top Chan. 6PH/38658/JD04/114

Res.Bw 1.0 MHz [3dB] off 1 MHz

TG.Lvl 0 dB

CF.Stp 100.000 MHz

Unit

-27.00 dBm

OFF

OFF

D1-D2

D1

D2

D1-D2

20.0

10.0

0

-10.0

-20.0

-30.0

-40.0

-50.0

-60.0

-70.0

Start

4 GHz

Span

1 GHz

Center

4.5 GHz

Sweep

20 ms

Stop

5 GHz

Stop

5 GHz

LVLOFF

Date 29.Mar.'99 Time 15:03:17

Ref.Lvl Marker -93.1 dBm/Hz

24.50 dBm

F1 5.725000000000 GHz

F2 OFF

F2-F1 OFF

D1

D2

D1-D2

20.0

10.0

0

-10.0

-20.0

-30.0

-40.0

-50.0

-60.0

-70.0

Start

4 GHz

Span

1 GHz

Center

4.5 GHz

Sweep

20 ms

Stop


5 GHz

Stop

5 GHz


Radiated, Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit.
Limit. Di: -27dBm. FCC Part 15.407(b) TX: 5.725-5.825GHz. Top Chan. 6PH/38658/JD04/115

LVL OFF
 Date 29.Mar.'99 Time 15:08:55
 Ref.Lvl 7.00 dBm
 Marker -97.2 dBm/Hz
 6.0024 GHz
 F1 OFF D1
 F2 OFF D2
 F2-F1 OFF D1-D2
 Res.Bw 1.0 MHz [3dB]
 TG.Lvl off
 CF.Stp 220.000 MHz
 Vid.Bw 1 MHz
 RF.Att 0 dB
 Unit [dBm]

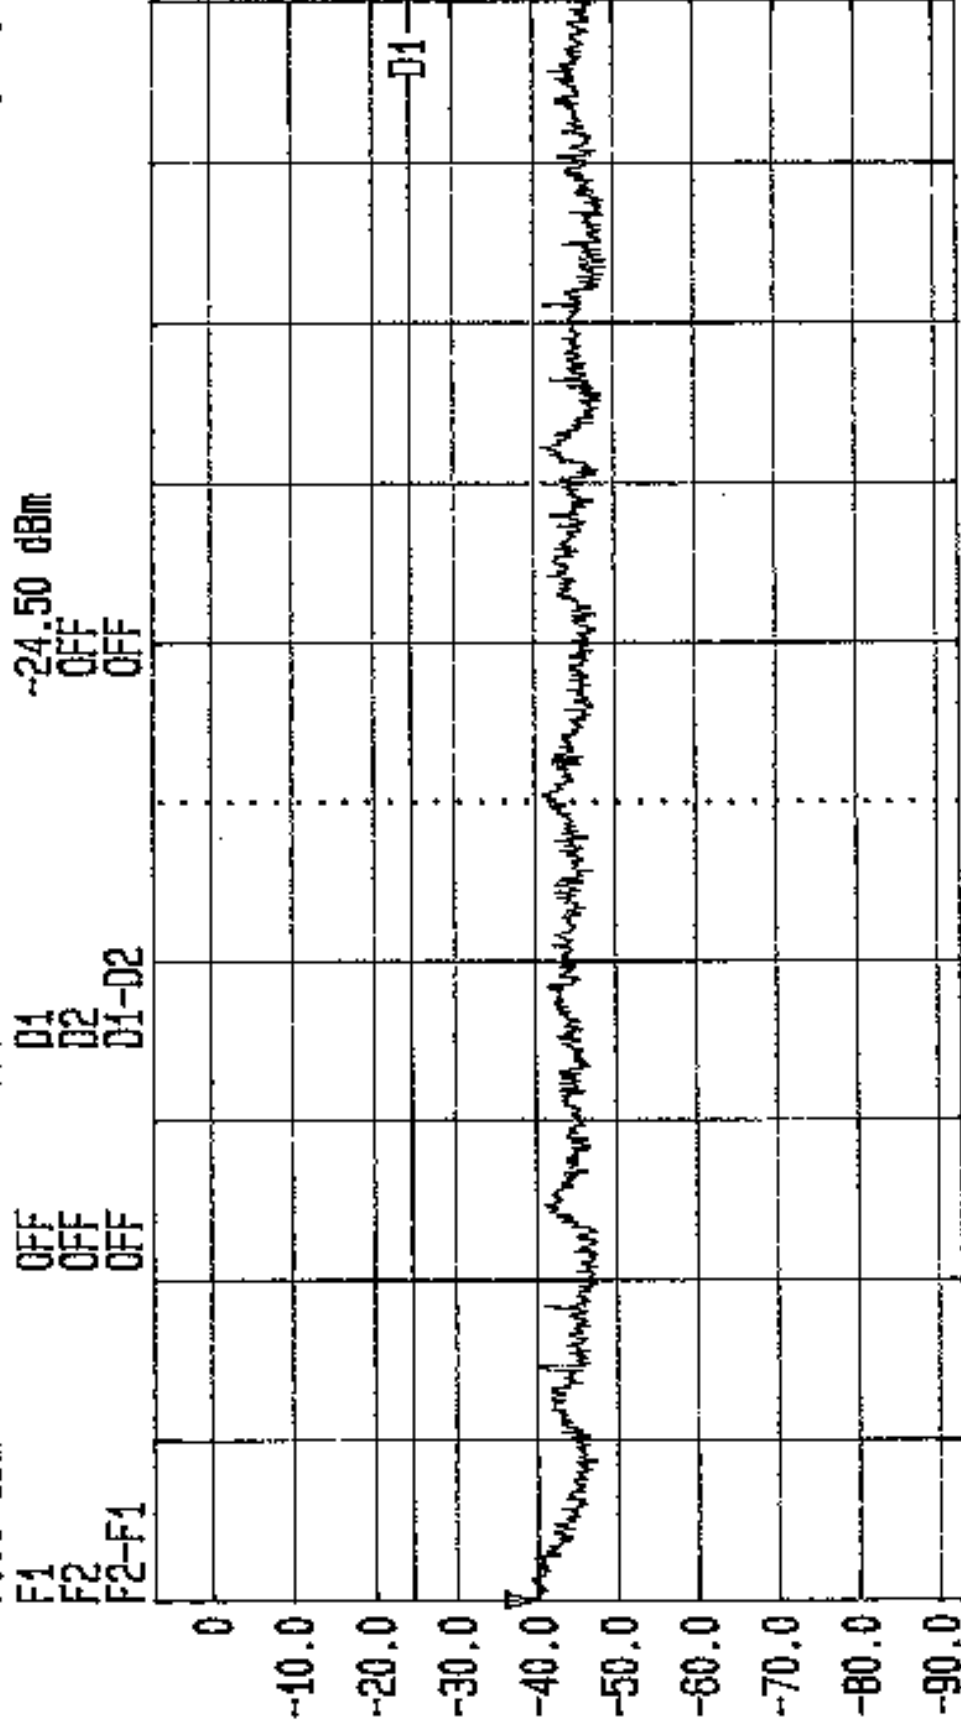


Start 6 GHz
 Stop 8.2 GHz
 Radiated, Tested by AFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit.
 Limit: D1: -27dBm. FCC Part 15.407(b) TX: 5.15-5.25GHz. Bot Chan. GPH/38658/JD04/116

LVL OFF
 Date 29.Mar.'99 Time 15:14:49
 Ref.Lvl 7.00 dBm
 Marker -97.7 dBm/Hz
 5.0048 GHz
 F1 OFF D1
 F2 OFF D2
 F2-F1 OFF D1-D2
 Res.Bw 1.0 MHz [3dB]
 TG.Lvl Off
 CF.Stp 220.000 MHz
 HF.Att 0 dB
 Unit [dBm]
 Vid.Bw 1 MHz

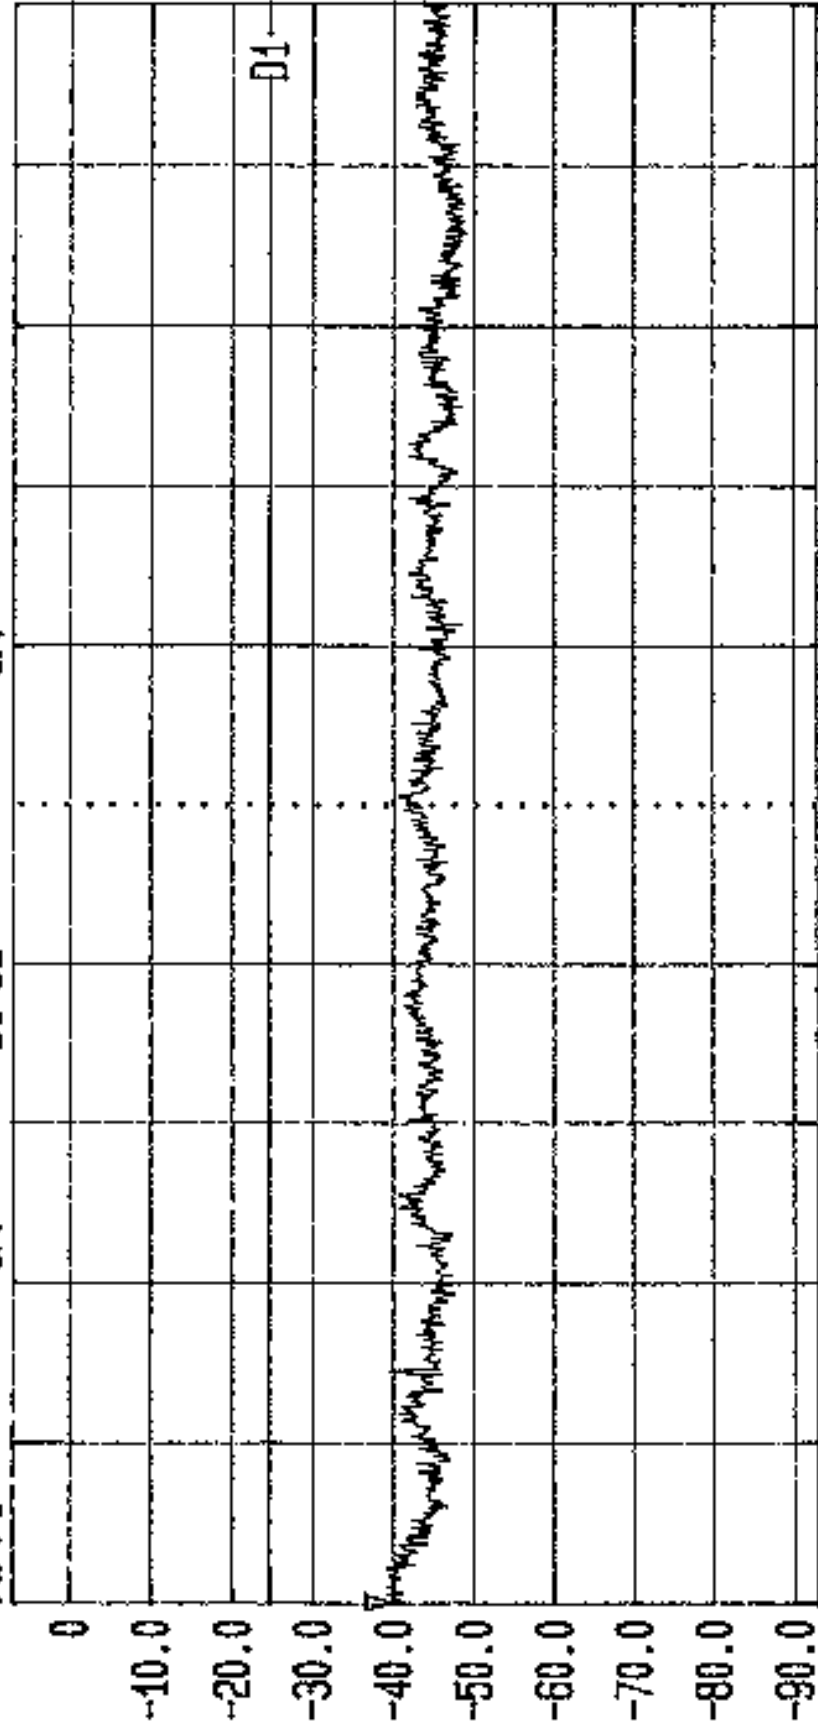


Start 6 GHz
 Span 2.2 GHz
 Center 7.1 GHz
 Sweep 20 ms
 Stop 8.2 GHz
 Radiated. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit.
 Limit: D1: -27dBm. FCC Part 15.407(b) TX: 5.15-5.25GHz. Top Chan. GPH/3865B/JD04/117

LVL OFF
 Date 29.Mar.'99 Time 15:20:33
 Ref.Lvl 7.00 dBm
 Marker --97.9 dBm/Hz
 5.0415 GHz
 F1 OFF D1
 F2 OFF D2
 F2-F1 OFF D1-D2
 Res.Bw 1.0 MHz [3dB]
 TS.Lvl off
 CF.Stp 220.000 MHz
 Vid.Bw 1 MHz
 RF.Att 0 dB
 Unit [dBm]

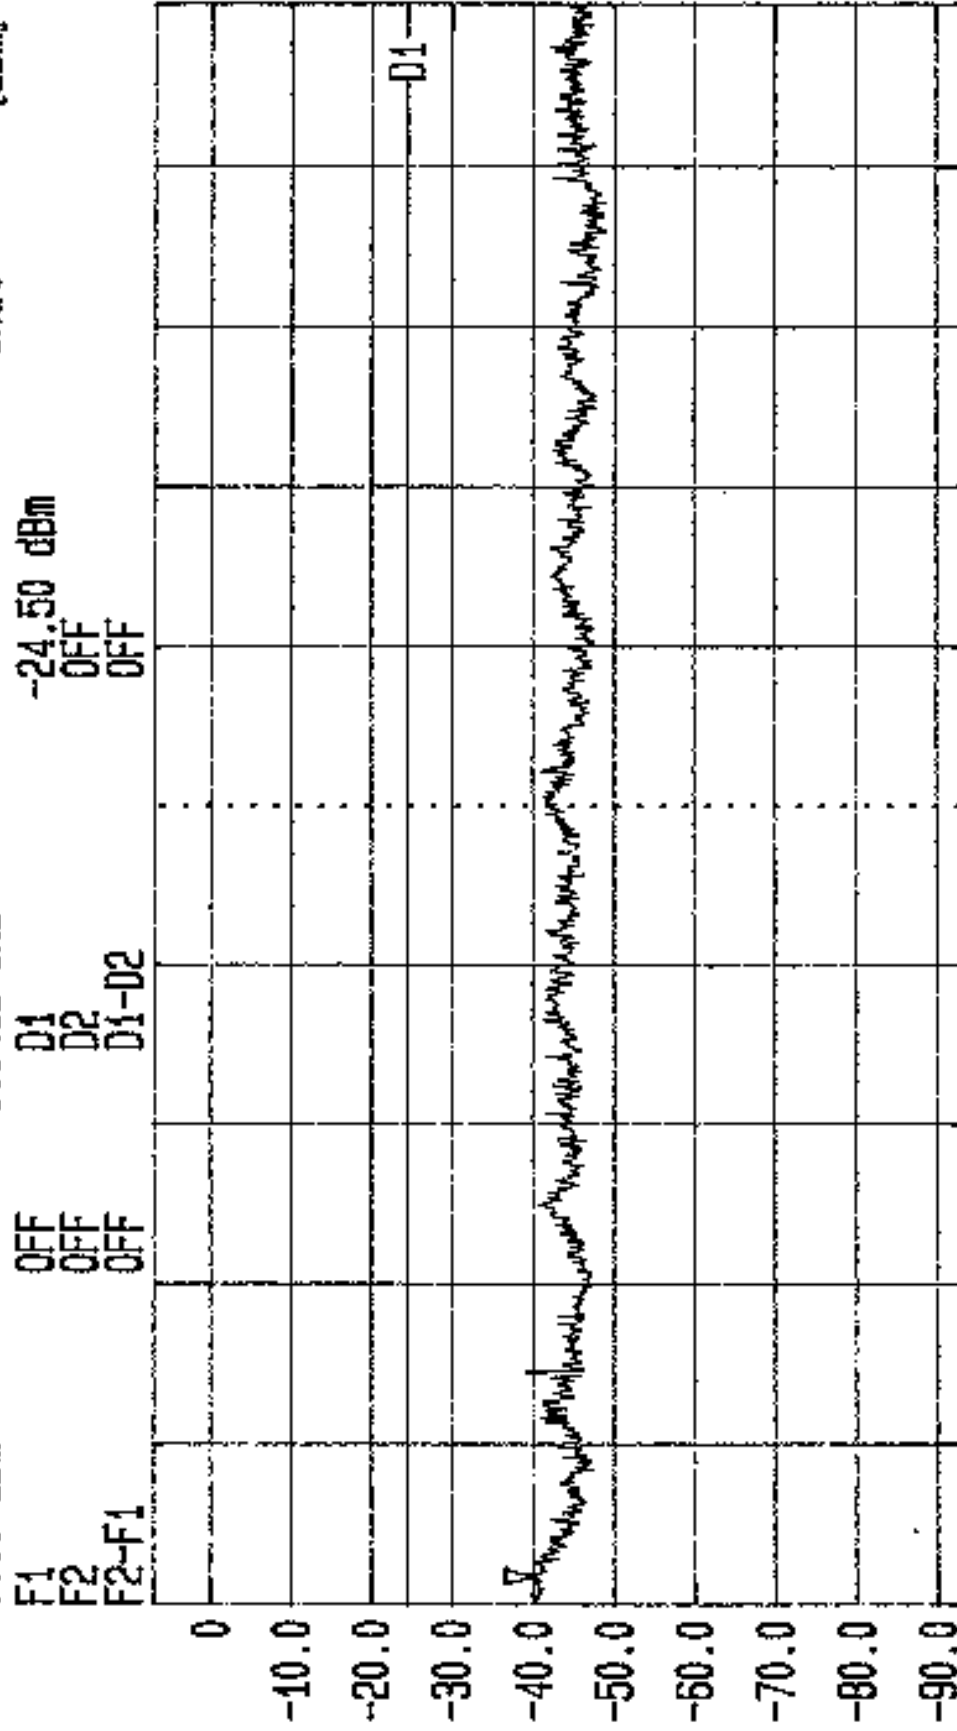


Start 6 GHz
 Span 2.2 GHz
 Center 7.1 GHz
 Sweep 20 ms
 Stop 8.2 GHz
 Radiated. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit.
 Limit. D1: -27dBm. FCC Part 15.407 (b) TX: 5.25-5.35GHz. Bot Chan. 6PH/3855B/JD04/118

Date 29.Mar.'99 Time 15:28:16
 Ref.Lvl 7.00 dBm
 Marker -96.9 dBm/Hz
 6.0391 GHz
 F1 OFF D1
 F2 OFF D2
 F2-F1 OFF D1-D2
 Res.BW 1.0 MHz [3dB]
 16.Lvl off
 CF.Stp 220.000 MHz
 Vid.BW 1 MHz
 RF.Att 0 dB
 Unit [dBm]

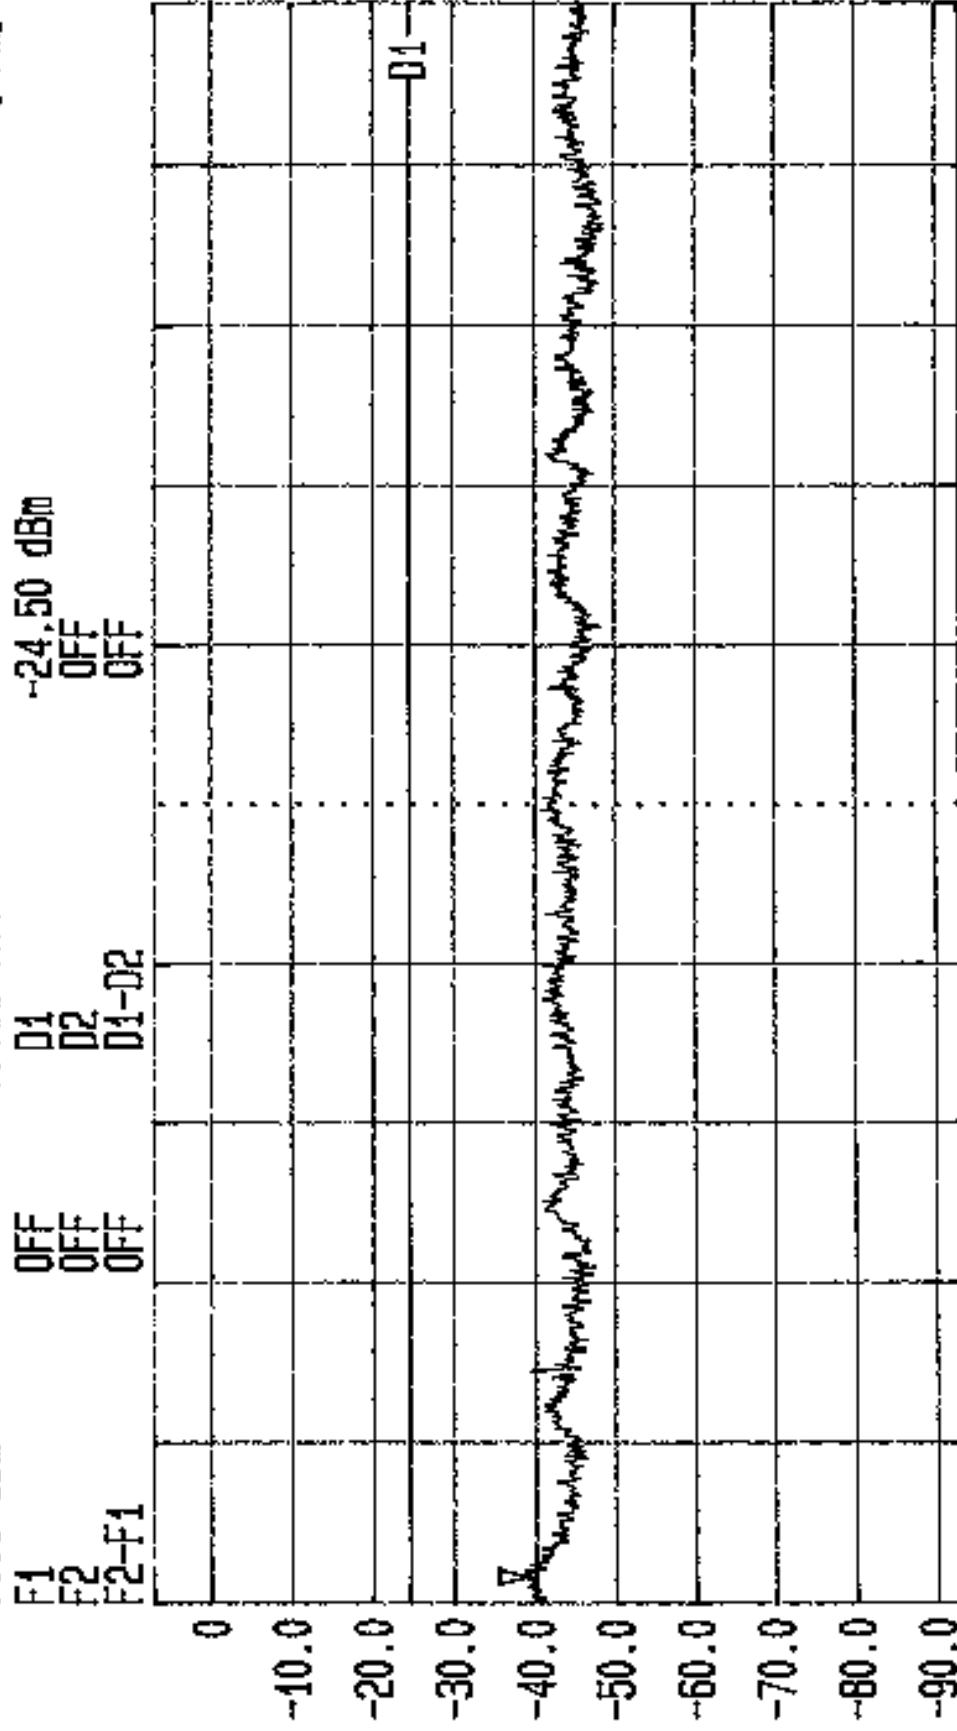


Start 6 GHz
 Span 2.2 GHz
 Center 7.1 GHz
 Sweep 20 ms
 Stop 8.2 GHz
 Radiated. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit.
 Limit. D1: -27dBm. FCC Part 15.407(b) TX: 5.25-5.35GHz. Top Chan. GPH/38658/JD04/119

LVL OFF
 Date 29.Mar.'99 Time 15:32:01
 Ref.Lvl 7.00 dBm
 Marker -97.5 dBm/Hz
 5.0391 GHz
 F1 OFF D1
 F2 OFF D2
 F2-F1 OFF D1-D2
 Res.Bw 1.0 MHz [3dB]
 T6.Lvl Off
 CF.Stp 220.000 MHz
 Vid.Bw 1 MHz
 AF.Att 0 dB
 Unit [dBm]

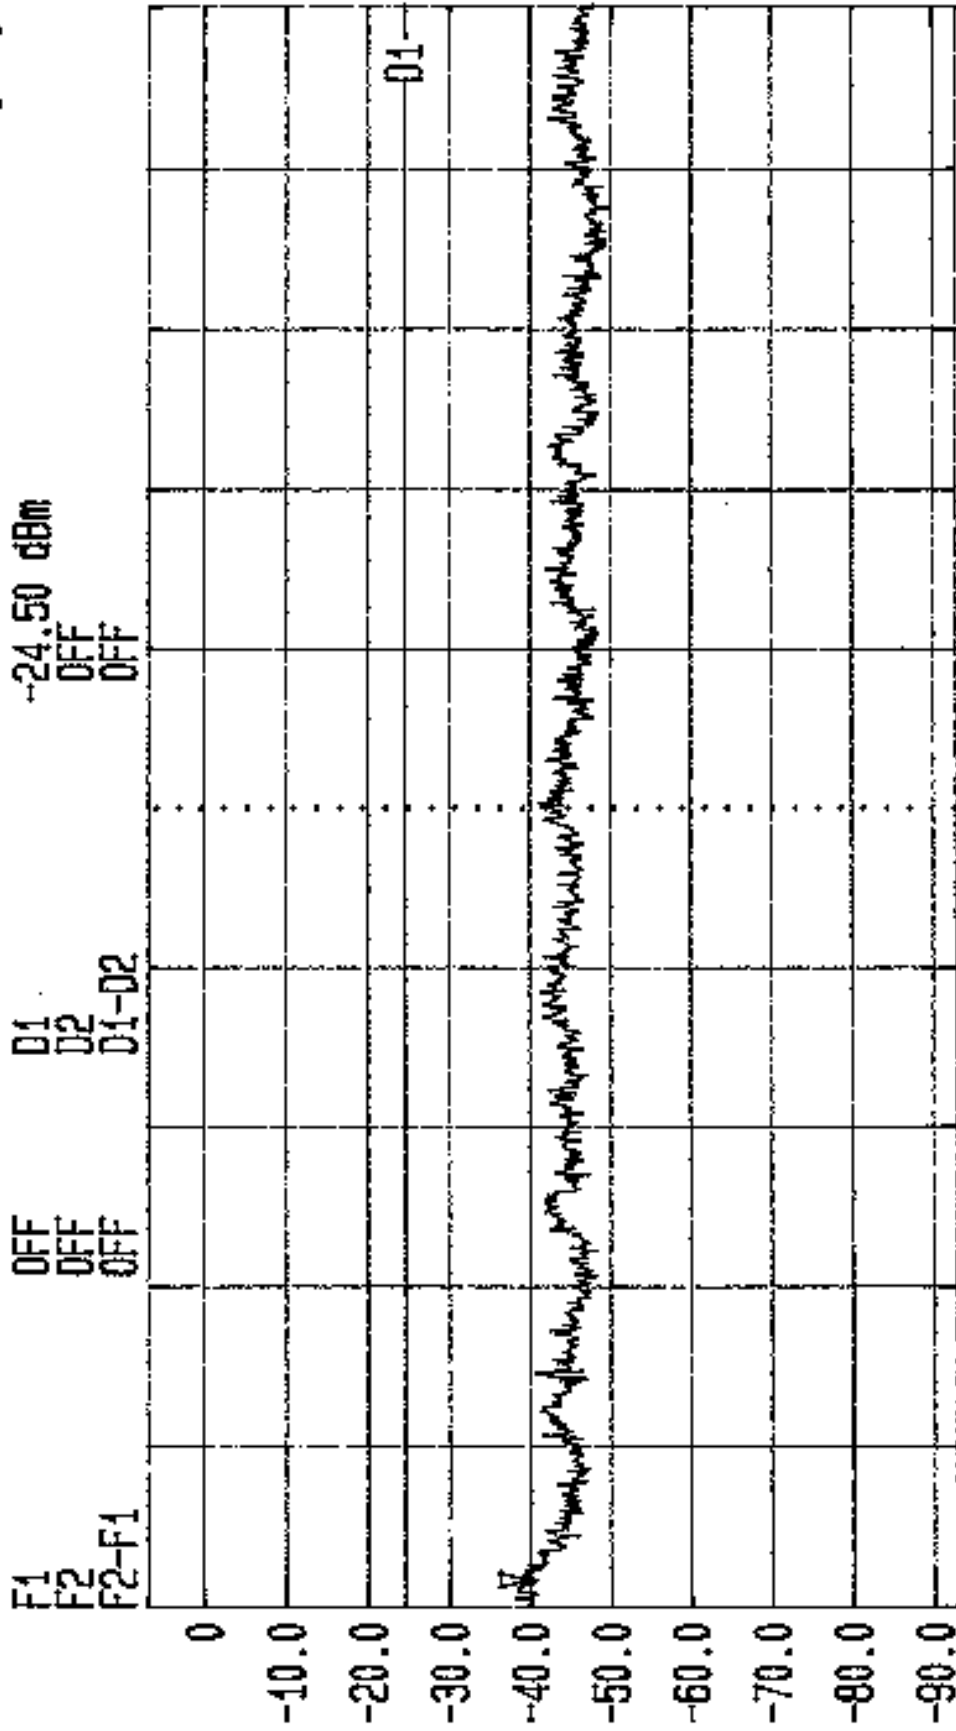


Start 6 GHz
 Stop 8.2 GHz
 Center 7.1 GHz
 Sweep 20 ms
 Span 2.2 GHz
 Radiated. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit.
 Limit. D1: -27dBm. FCC Part 15.407(b) TX: 5.725-5.825GHz. Bot Chan. 6PH/38658/JD04/120

LVL OFF
 Date 29.Mar.'99 Time 15:37:38
 Ref.Lvl 7.00 dBm
 Marker -97.3 dBm/Hz
 5.0293 GHz
 F1 OFF D1
 F2 OFF D2
 F2-F1 OFF D1-D2
 Res.BW 1.0 MHz [3dB]
 TG.Lvl off
 CF.Stp 220.000 MHz
 Vid.BW 1 MHz
 RF.Att 0 dB
 Unit [dBm]

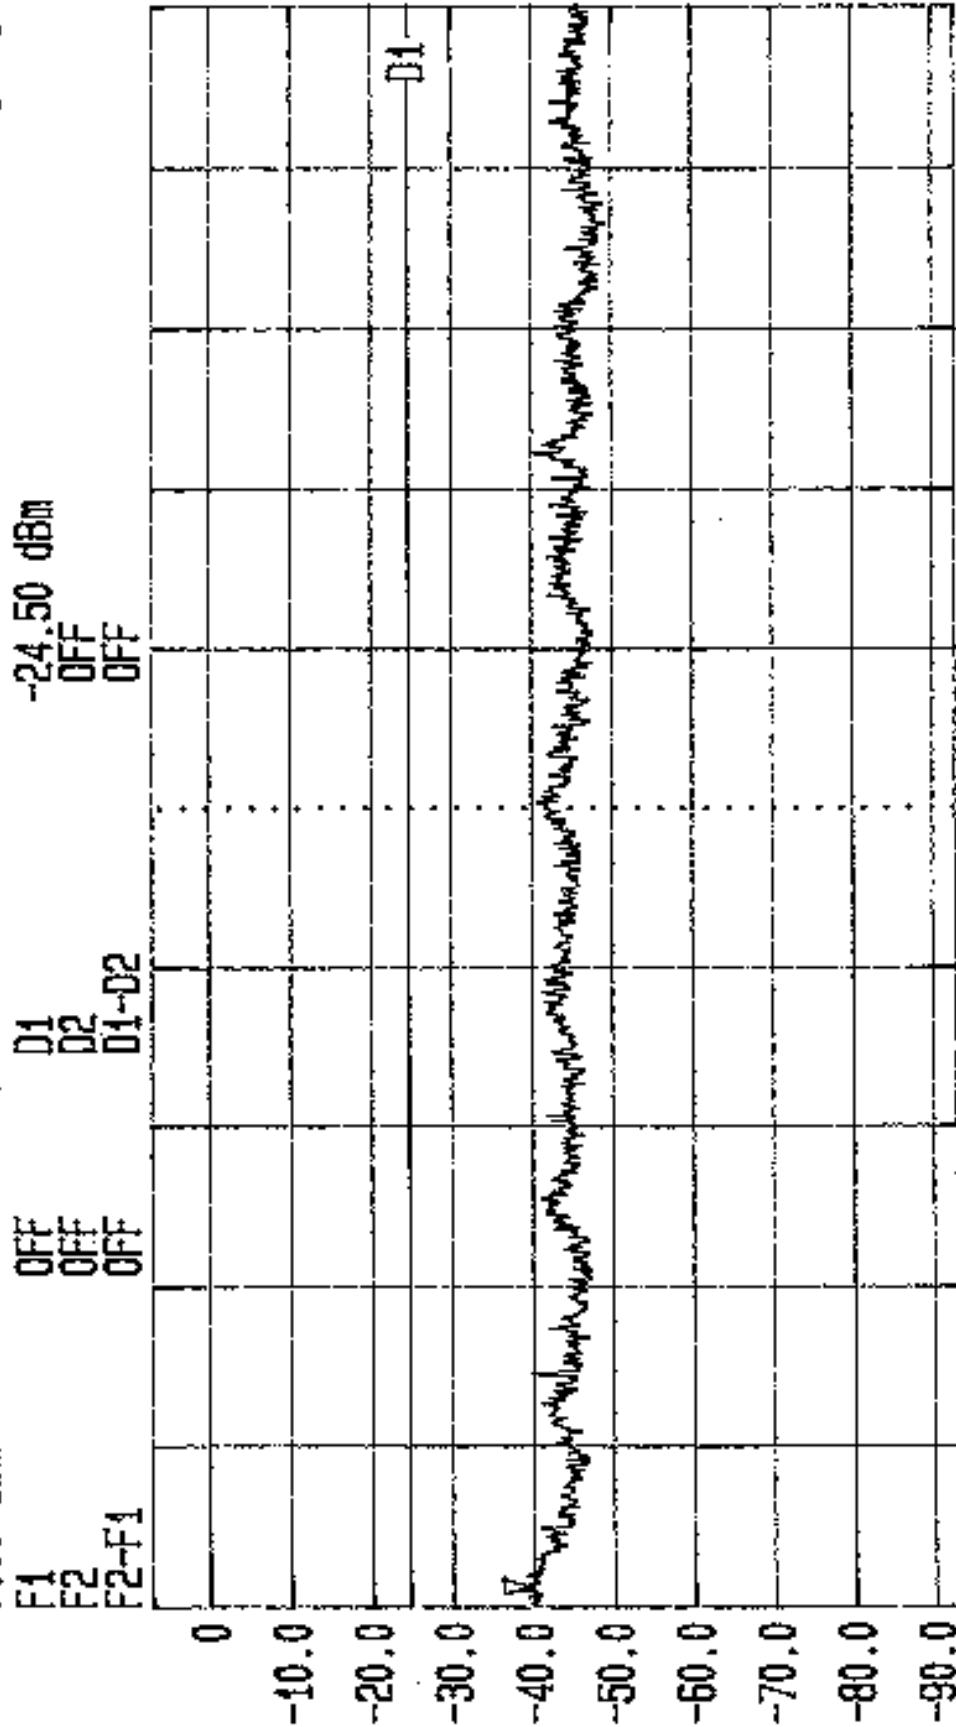


Start 6 GHz
 Span 2.2 GHz
 Center 7.1 GHz
 Sweep 20 ms
 Stop 8.2 GHz
 Radiated. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit.
 Limit. D1: -27dBm. FCC Part 15.407(b) TX: 5.725-5.825GHz. Top Chan. GPH/38658/JD04/121

LVLOFF
 Date 29.Mar.'99 Time 15:43:15
 Ref.Lvl 11.60 dBm
 Marker -95.2 dBm/Hz
 9.7145 GHz
 F1 OFF D1
 F2 OFF D2
 F2-F1 OFF D1-D2
 Res.BW 1.0 MHz [3dB] off
 TG.Lvl 430.000 MHz
 CF.Stp
 Vid.BW 1 MHz
 RF.Att 0 dB
 Unit [dBm]
 -27.00 dBm
 OFF
 OFF

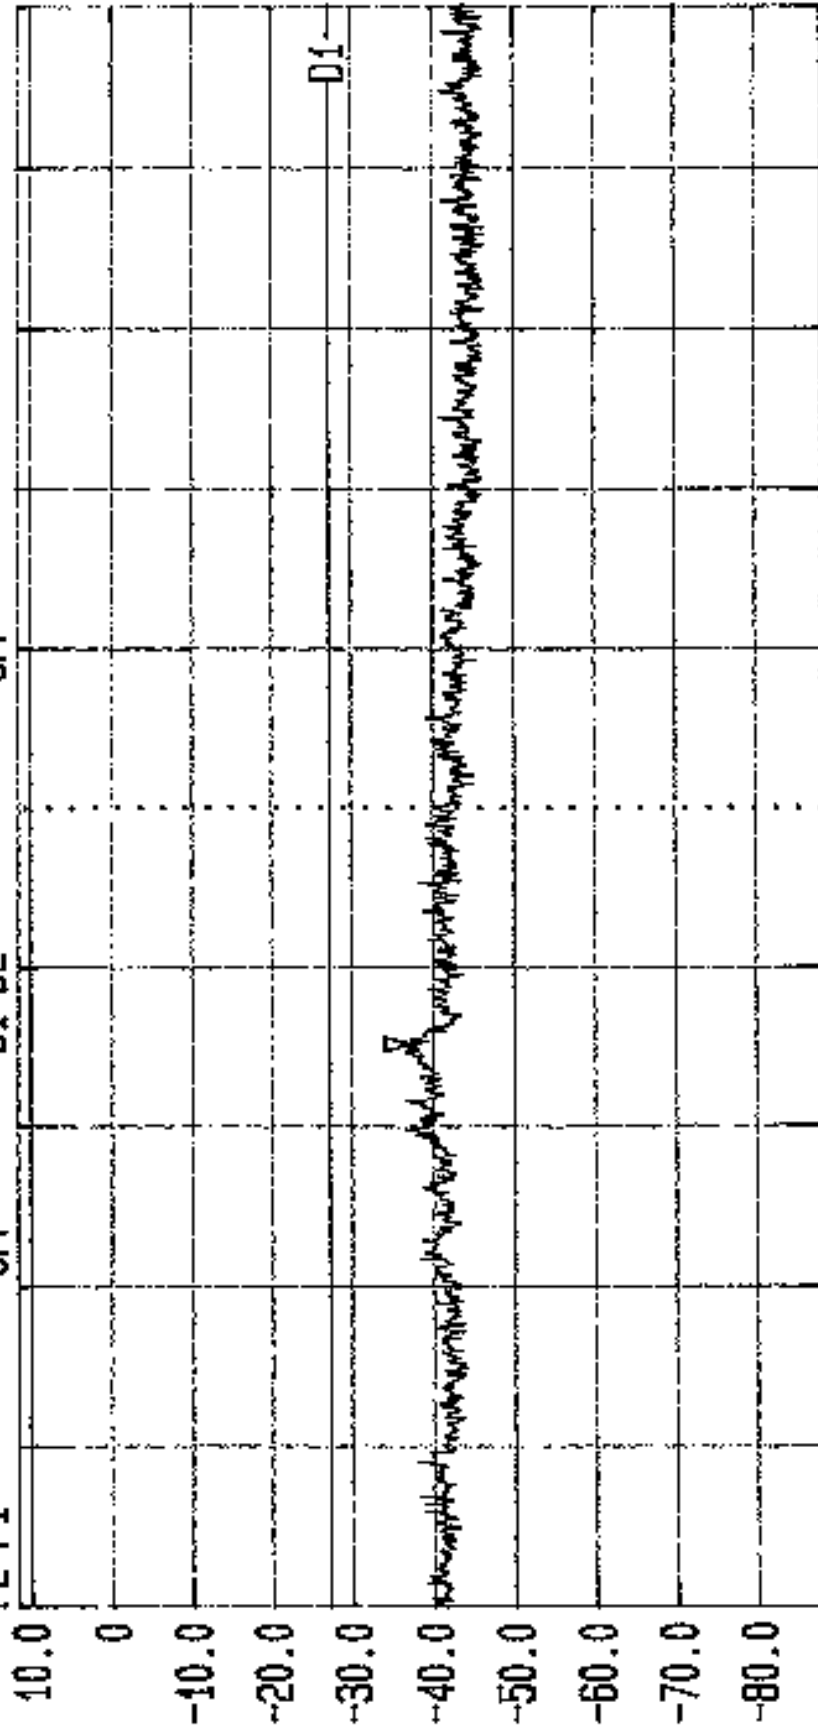


Start 8.2 GHz Span 4.3 GHz Center 10.35 GHz Sweep 20 ms Stop 12.5 GHz
 Radiated. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit.
 Limit. Di: -27dBm. FCC Part 15.407 (b) TX: 5.15-5.25GHz. Bot Chan. GPH/38658/J004/122

LVL:OFF
 Date 29.Mar.'99 Time 15:49:00
 Ref.Lvl 11.60 dBm
 Marker -94.5 dBm/Hz
 9.7050 GHz
 F1 OFF D1
 F2 OFF D2
 F2-F1 OFF D1-D2
 Res.Bw 1.0 MHz [3dB]
 TG.Lvl off
 CF.Stp 430.000 MHz
 Vid.Bw 1 MHz
 RF.Att 0 dB
 Unit [dBm]

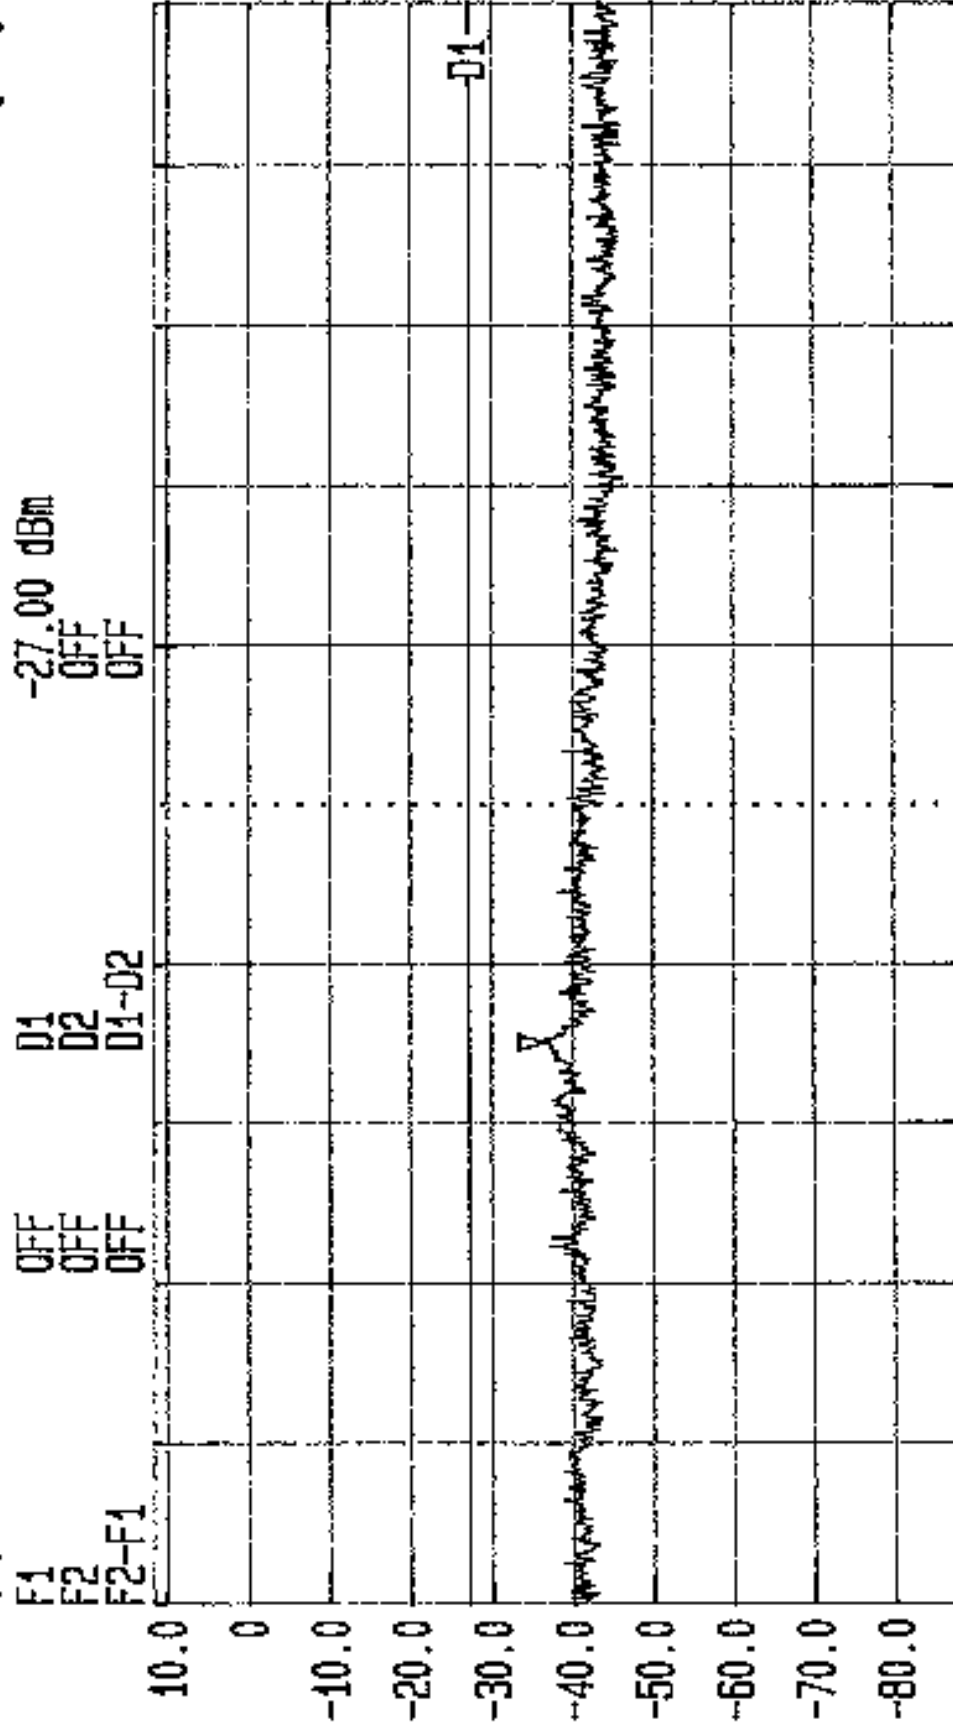


Radiated. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit.
 Limit. D1: -27dBm. FCC Part 15.407(b) TX: 5.15-5.25GHz. Top Chan. GPH/38658/JD04/123

LVL OFF
 Date 29.Mar.'99 Time 15:54:45
 Ref.Lvl 11.60 dBm
 Marker -95.3 dBm/Hz
 9.6906 GHz
 F1 OFF D1
 F2 OFF D2
 F2-F1 OFF D1-D2
 Res.Bw 1.0 MHz [3dB]
 TG.Lvl off
 CF.Stp 430.000 MHz
 Vid.Bw 1 MHz
 RF.Att 0 dB
 Unit [dBm]

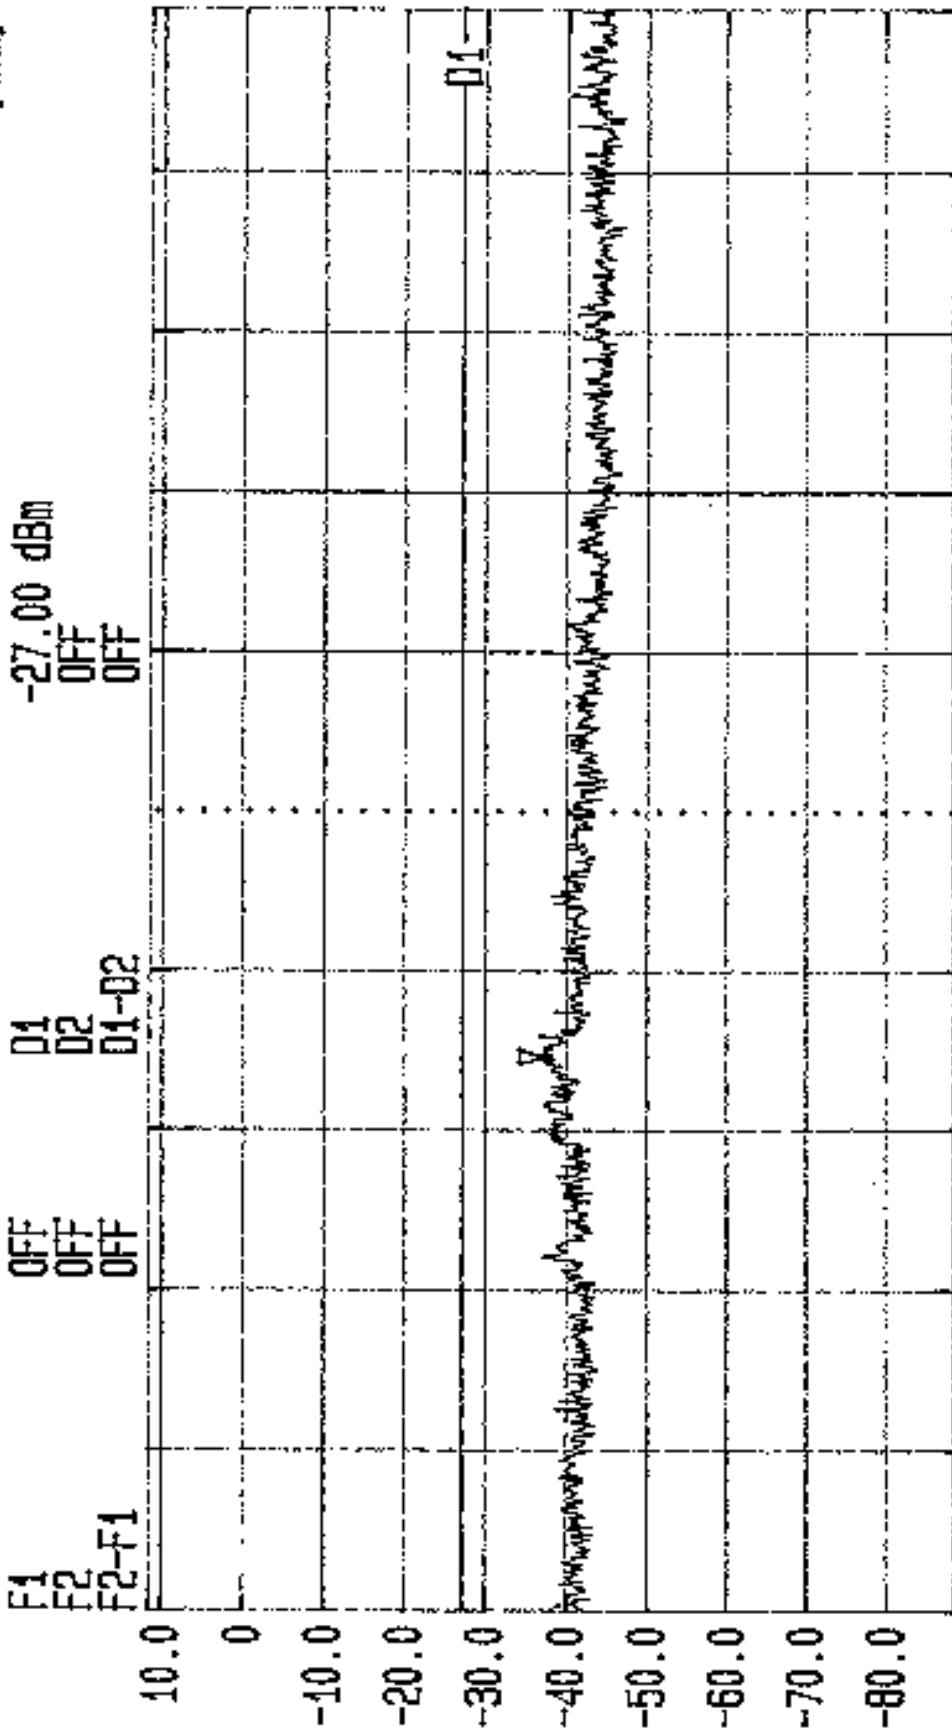


Start 8.2 GHz
 Span 4.3 GHz
 Center 10.35 GHz
 Sweep 20 ms
 Stop 12.5 GHz
 Radiated, Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit.
 Limit: D1: -27dBm. FCC Part 15.407 (b) TX: 5.25-5.35GHz. Bot Chan. GPH/38658/JD04/124

LVLOFF
 Date 29.Mar.'99 Time 16:00:38
 Ref.Lvl 11.60 dBm
 Marker -95.5 dBm/Hz
 9.7097 GHz
 Res.Bw 1.0 MHz [3dB]
 TG.Lvl off
 CF.Stp 430.000 MHz
 F1 OFF D1
 F2 OFF D2
 F2-F1 OFF D1-D2
 Vid.Bw 1 MHz
 HF.Att 0 dB
 Unit [dBm]

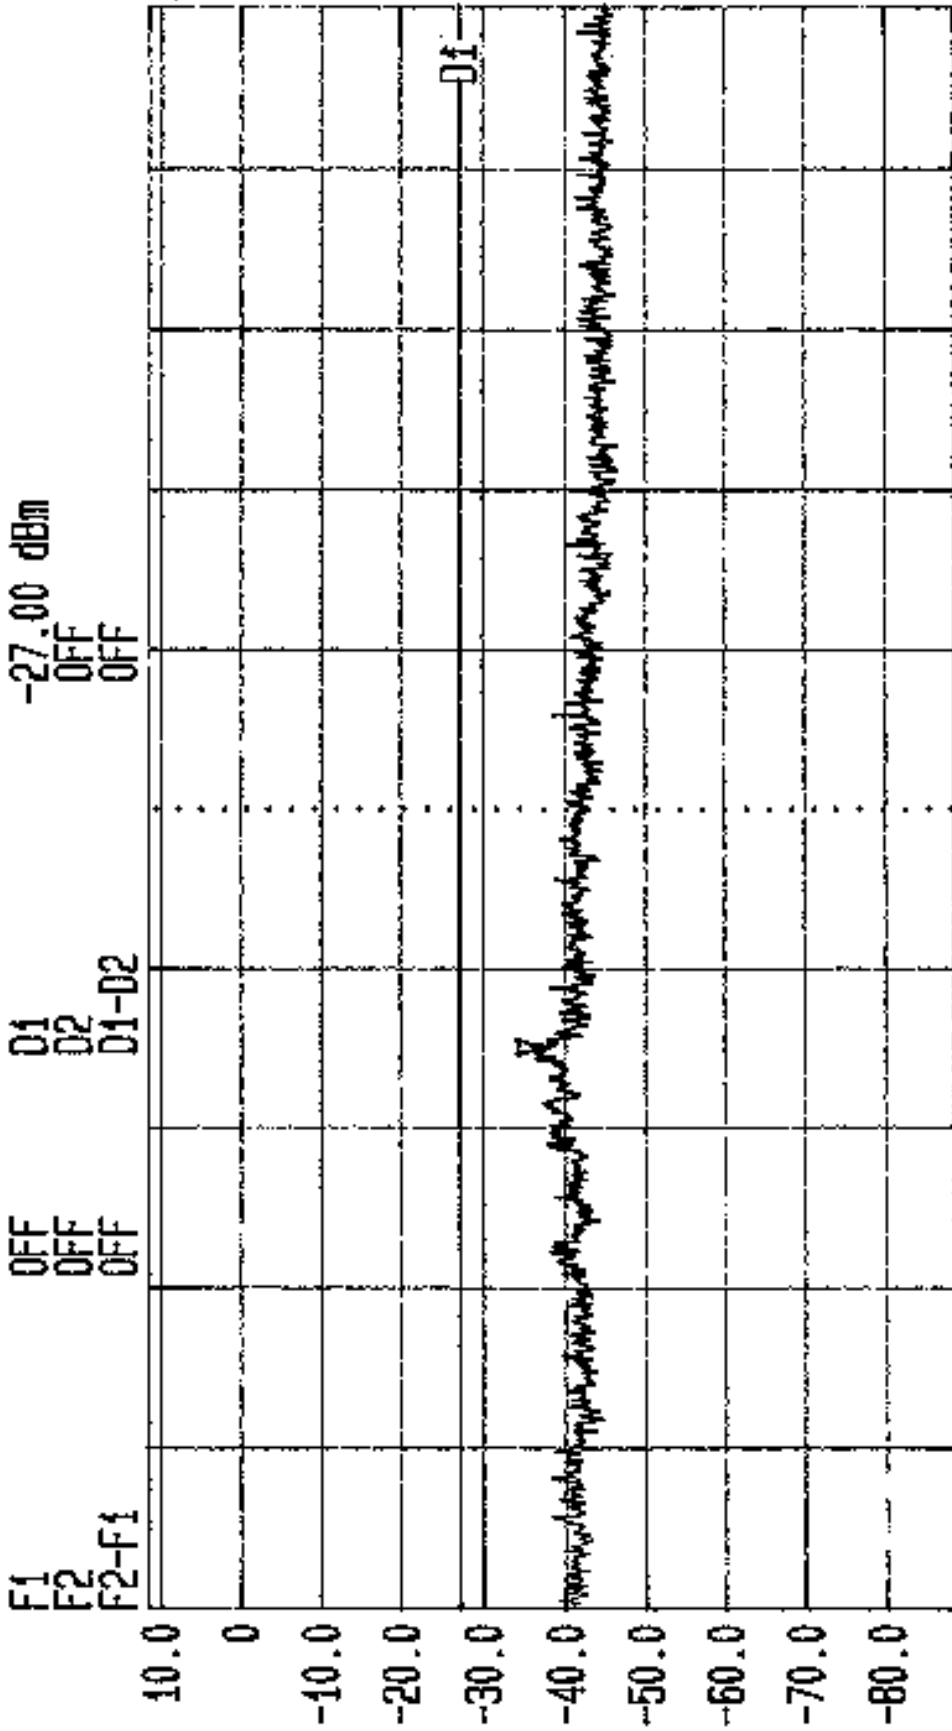


Start 8.2 GHz
 Stop 12.5 GHz
 Sweep 20 ms
 Center 10.35 GHz
 Span 4.3 GHz
 Radiated, Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit.
 Limit. D1: -27dBm. FCC Part 15.407 (b) TX: 5.25-5.35GHz. Top Chan. GPH/38658/JD04/125

LVL OFF
 Date 29. Mar. '99 Time 16:06:17
 Ref. Lvl 11.60 dBm
 Marker -94.6 dBm/Hz
 9.6858 GHz
 Res. BW 1.0 MHz [3dB]
 IG. Lvl off
 CF. Stp 430.000 MHz
 Vid. BW 1 MHz
 RF. Att 0 dB
 Unit [dBm]

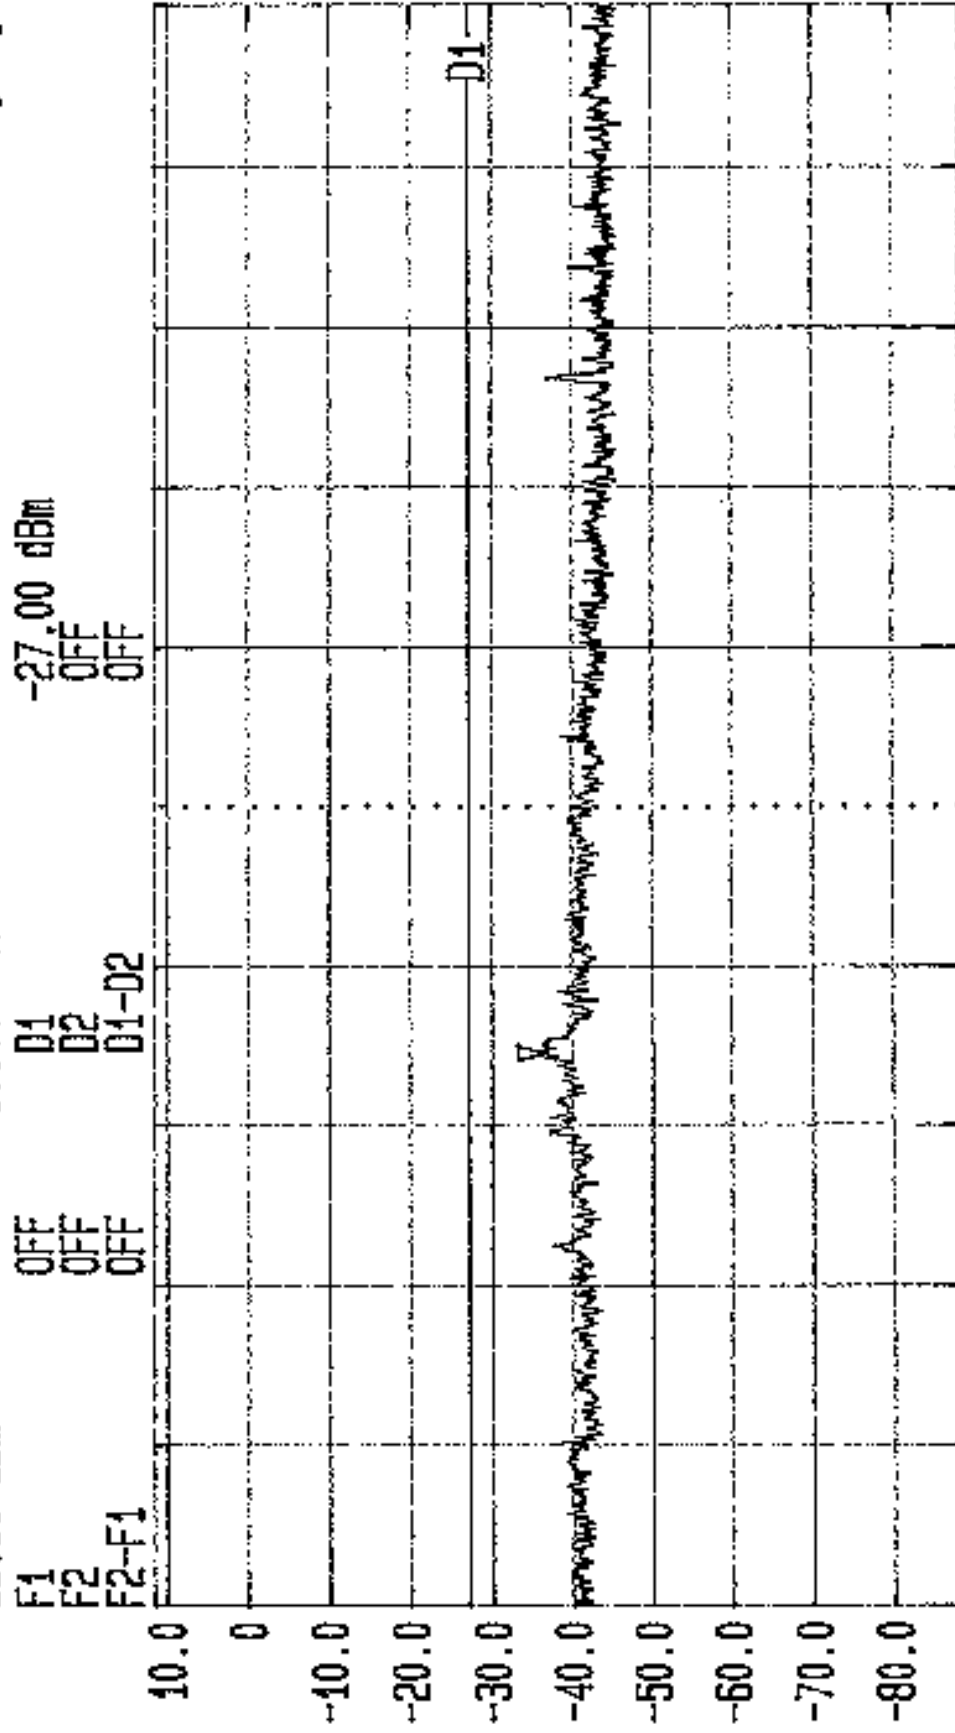


Start 8.2 GHz Span 4.3 GHz Center 10.35 GHz Sweep 20 ms Stop 12.5 GHz
 Radiated. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit.
 Limit. D1: -27dBm. FCC Part 15.407(b) TX: 5.725-5.825GHz. Bot Chan. GPH/38658/JD04/126

LVLOFF
 Date 29.Mar.'99 Time 16:11:54
 Ref.Lvl 11.60 dBm
 Marker -94.4 dBm/Hz
 9.6954 GHz
 F1 OFF D1
 F2 OFF D2
 F2-F1 OFF D1-D2
 Res.Bw 1.0 MHz [3dB] Off
 TG.Lvl CF.Stp
 430.000 MHz
 Vid.Bw 1 MHz
 RF.Att 0 dB
 Unit [dBm]
 -27.00 dBm
 OFF
 OFF

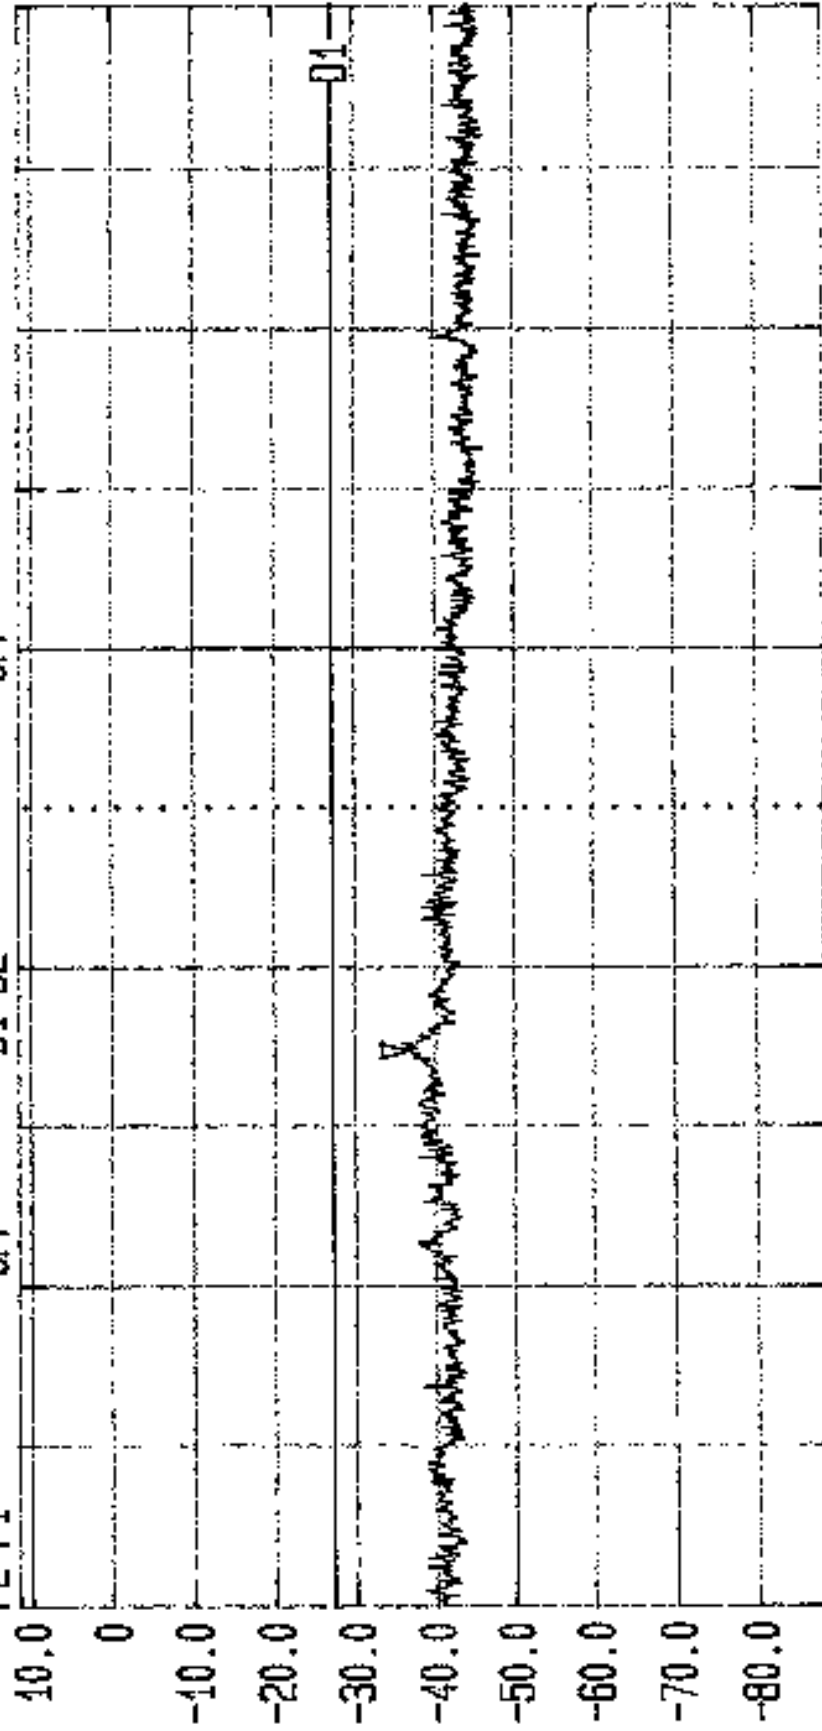


Start 8.2 GHz
 Span 4.3 GHz
 Center 10.35 GHz
 Sweep 20 ms
 Stop 12.5 GHz
 Radiated. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit.
 Limit. D1: -27dBm. FCC Part 15.407 (b) TX: 5.725-5.825GHz. Top Chan. GPH/38658/JD04/127

LVLOFF
 Date 29.Mar.'99 Time 16:25:36
 Ref.Lvl -4.30 dBm
 Marker -101.6 dBm/Hz
 14.4127 GHz
 F1 OFF D1
 F2 OFF D2
 F2-F1 OFF D1-D2
 Res.Bw 1 MHz [imp] Off
 550.000 MHz
 CF.Stp
 -27.00 dBm
 OFF
 OFF
 Vid.Bw 1 MHz
 RF.Att 0 dB
 Unit [dBm]

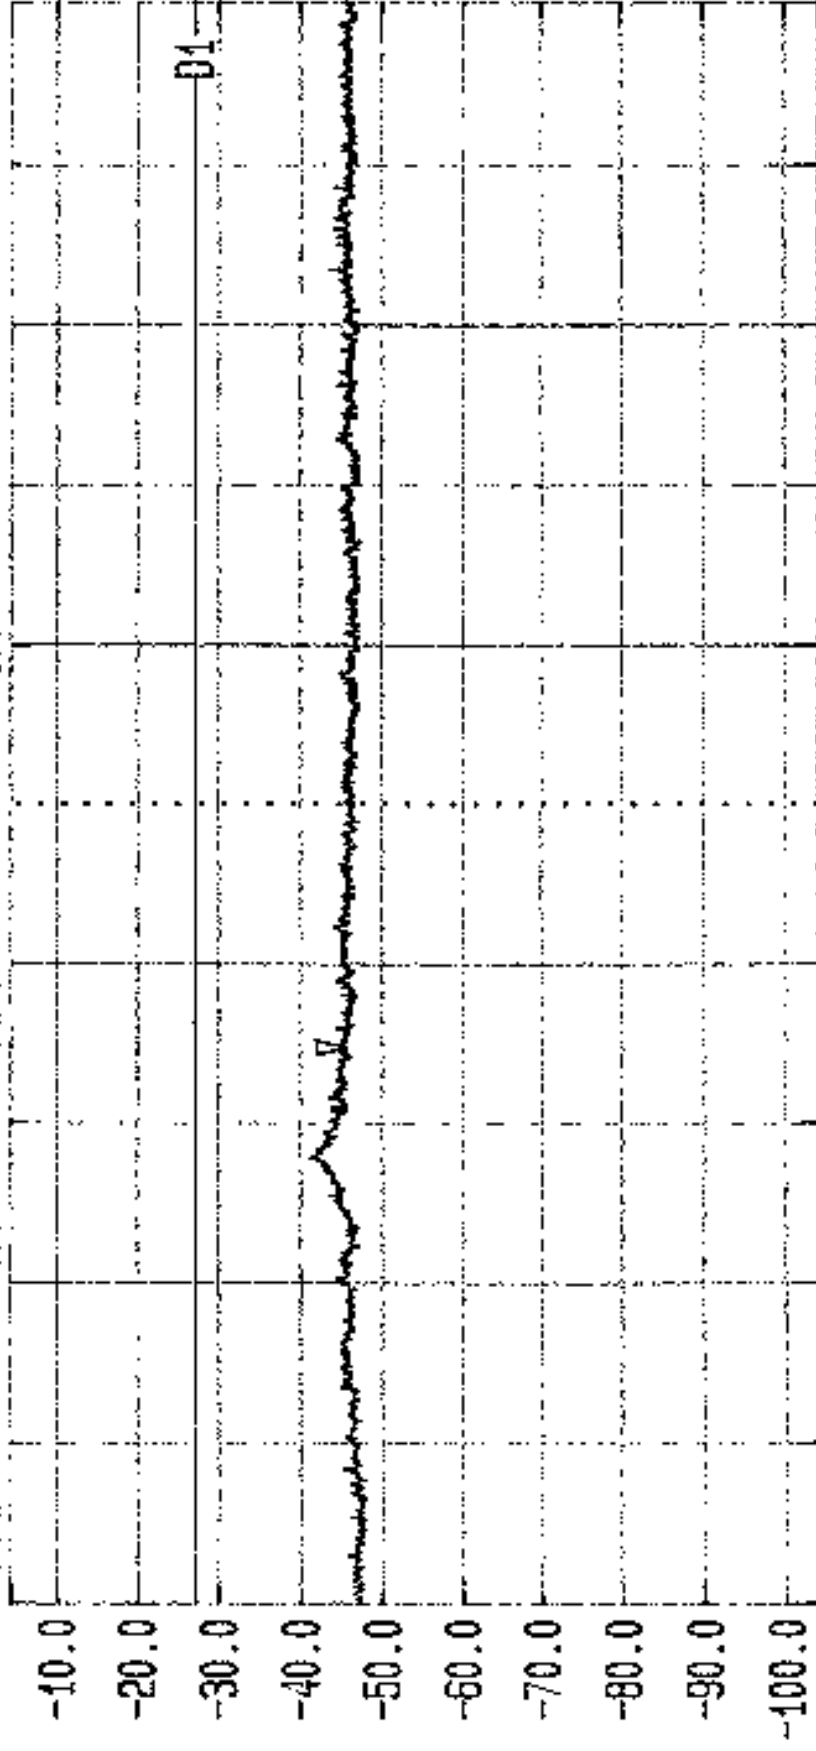

Start 12.5 GHz Span 5.5 GHz Center 15.25 GHz Sweep 40 ms Stop 18 GHz
 Radiated, Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit.
 Limit: D1: -27dBm. FCC Part 15.407(b) TX: 5.15-5.25GHz. Bot Chan. 6PH/38658/JD04/128

LVL OFF
 Date 29.Mar.'99 Time 16:31:47
 Ref.Lvl -4.30 dBm
 Marker -98.8 dBm/Hz
 14.0338 GHz
 F1 OFF D1
 F2 OFF D2
 F2-F1 OFF D1-D2
 Res.Bw 16.Lvl
 CF.Stp
 1 MHz [imp]
 550.000 MHz
 1 MHz
 0 dB
 [dBm]

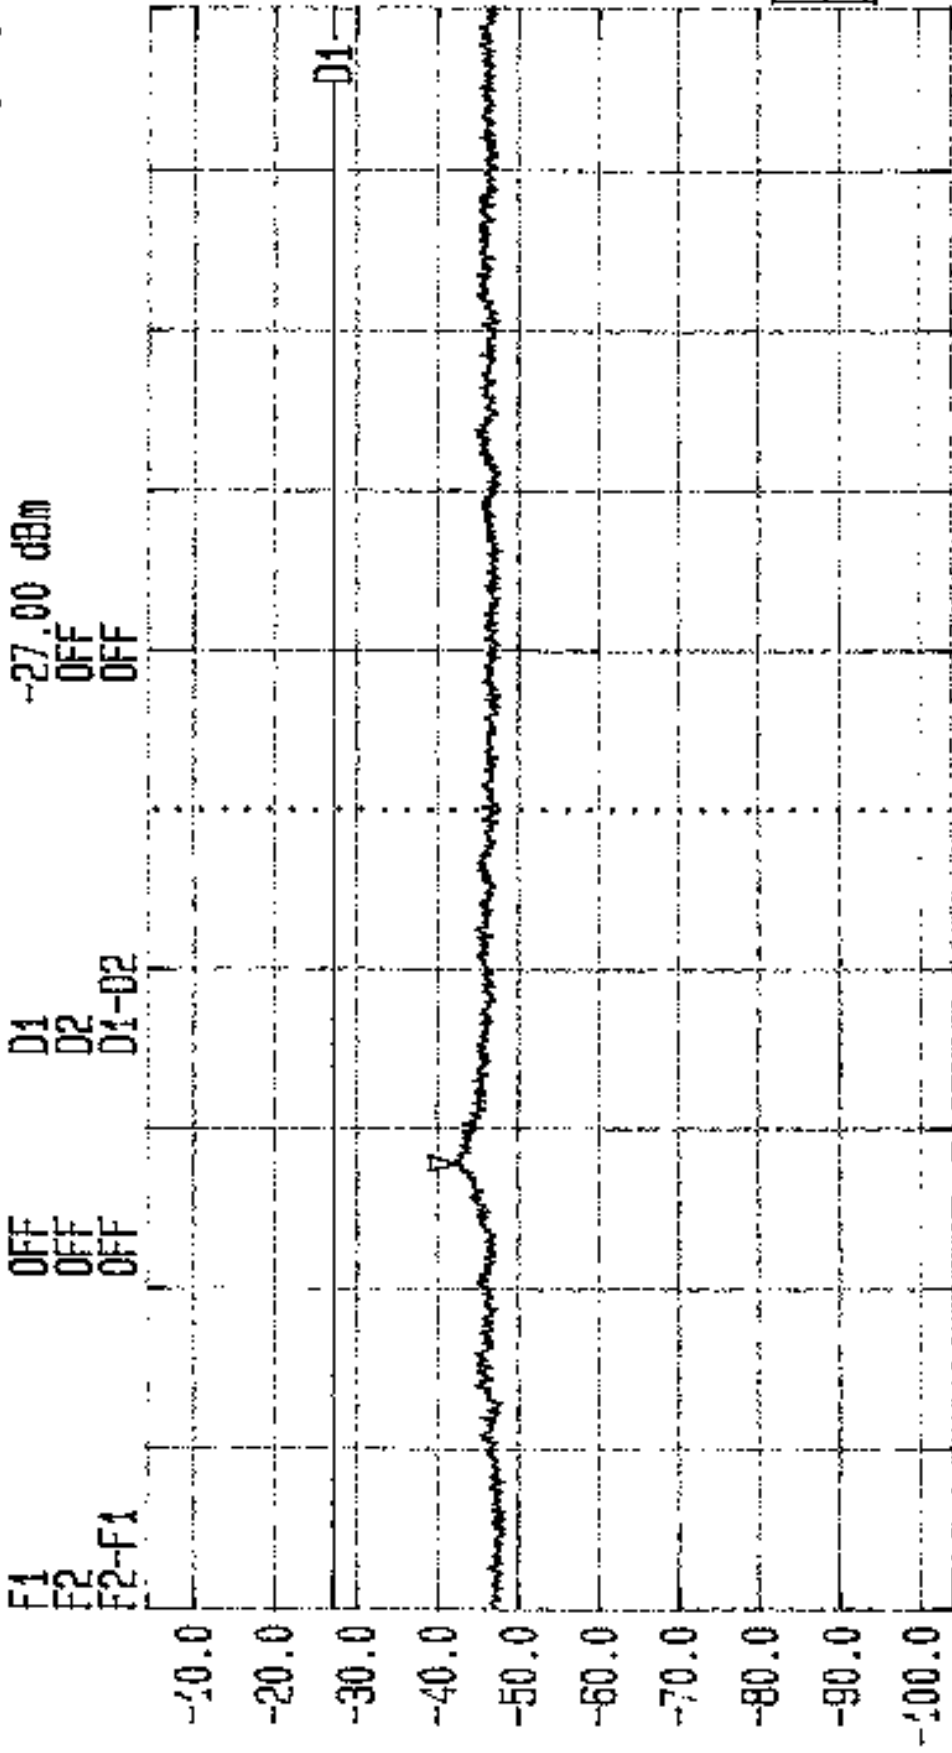

Start 14.9 GHz Span 5.5 GHz Center 15.25 GHz Sweep 40 ms Stop 15.5 GHz
 Radiated, Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit.
 Limit: D1: -27dBm. FCC Part 15.407(b) TX: 5.15-5.25GHz. Top Chan. GPH/38658/JD04/129

LVLOFF

Date 29.Mar.'99 Time 16:37:42

Ref.Lvl -4.30 dBm
Marker -99.5 dBm/Hz
14.0338 GHz

1 MHz

Vid.Bw

1 MHz [imp]

Res.Bw

Off

AF.Att

550.000 MHz

CF.Stp

0 dB


Unit

-27.00 dBm

F1 OFF D1

F2 OFF D2

F2-F1 OFF D1-D2

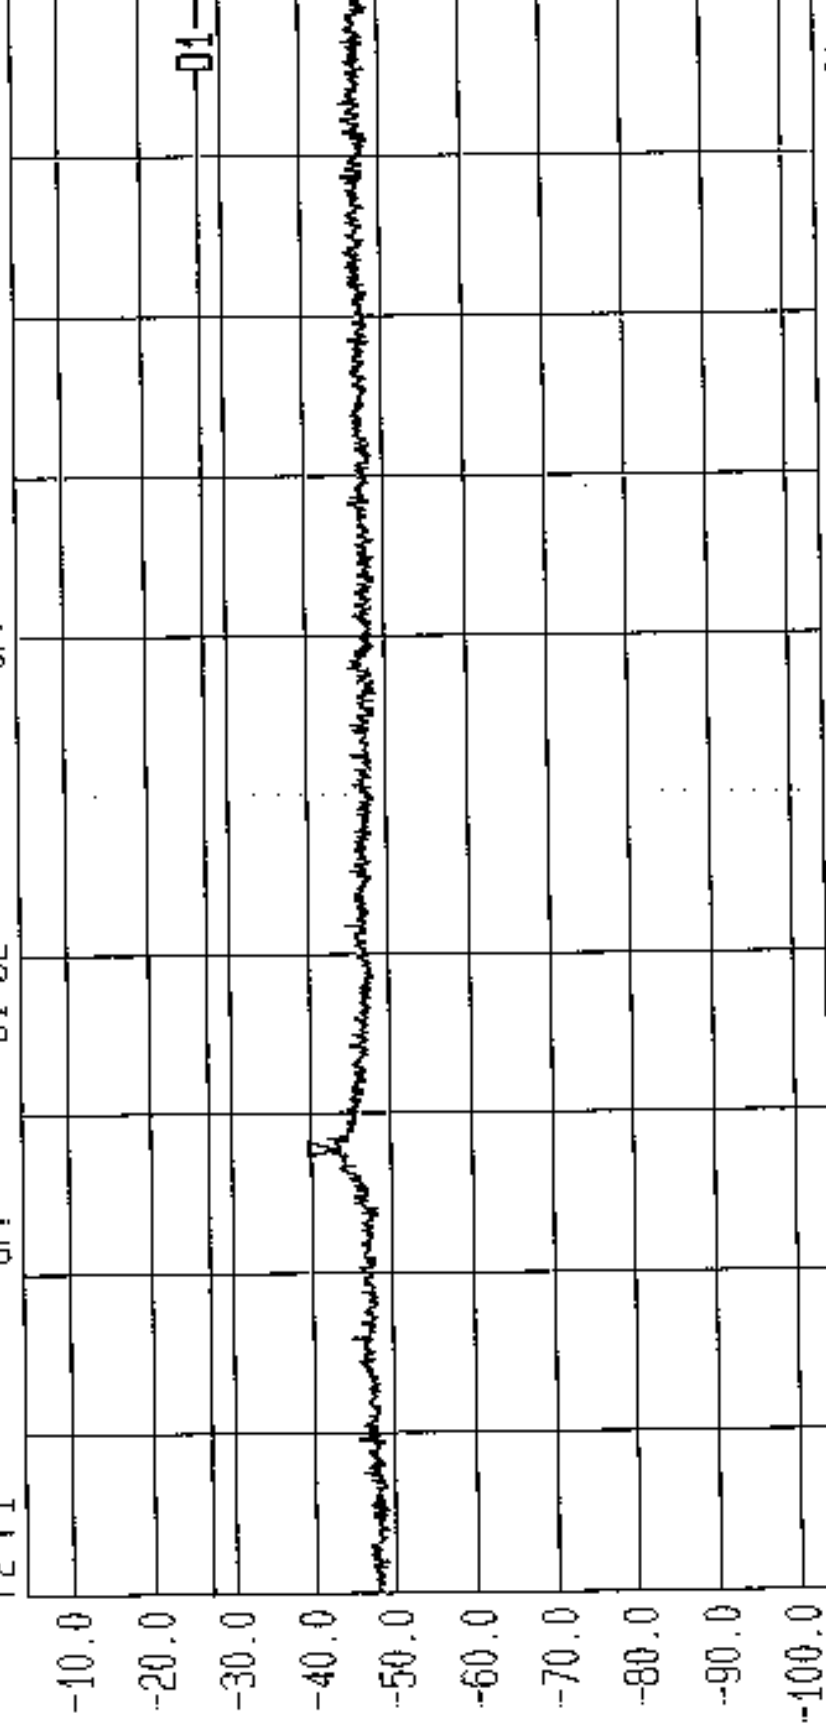

PA

10

Stop 18 GHz

Sweep 40 ms

Center 15.25 GHz

Span 5.5 GHz

Start 12.5 GHz

Radiated. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit.
Limit. D1: -27dBm. FCC Part 15.407(b) TX: 5.25-5.35GHz. Bot Chan. GPH/38658/JD04/130

LVL OFF


Date 29.Mar.'99 Time 16:43:36

Ref.Lvl -4.30 dBm
Marker -99.3 dBm/Hz
14.0338 GHz

F1 OFF D1
F2 OFF D2
F2-F1 OFF D1-D2

Res.Bw 1 MHz [imp]
1 MHz
Vid.Bw 1 MHz
RG.Lvl off
CF.Stp 550.000 MHz
RF.Att 0 dB
Unit [dBm]

-27.00 dBm
OFF
OFF

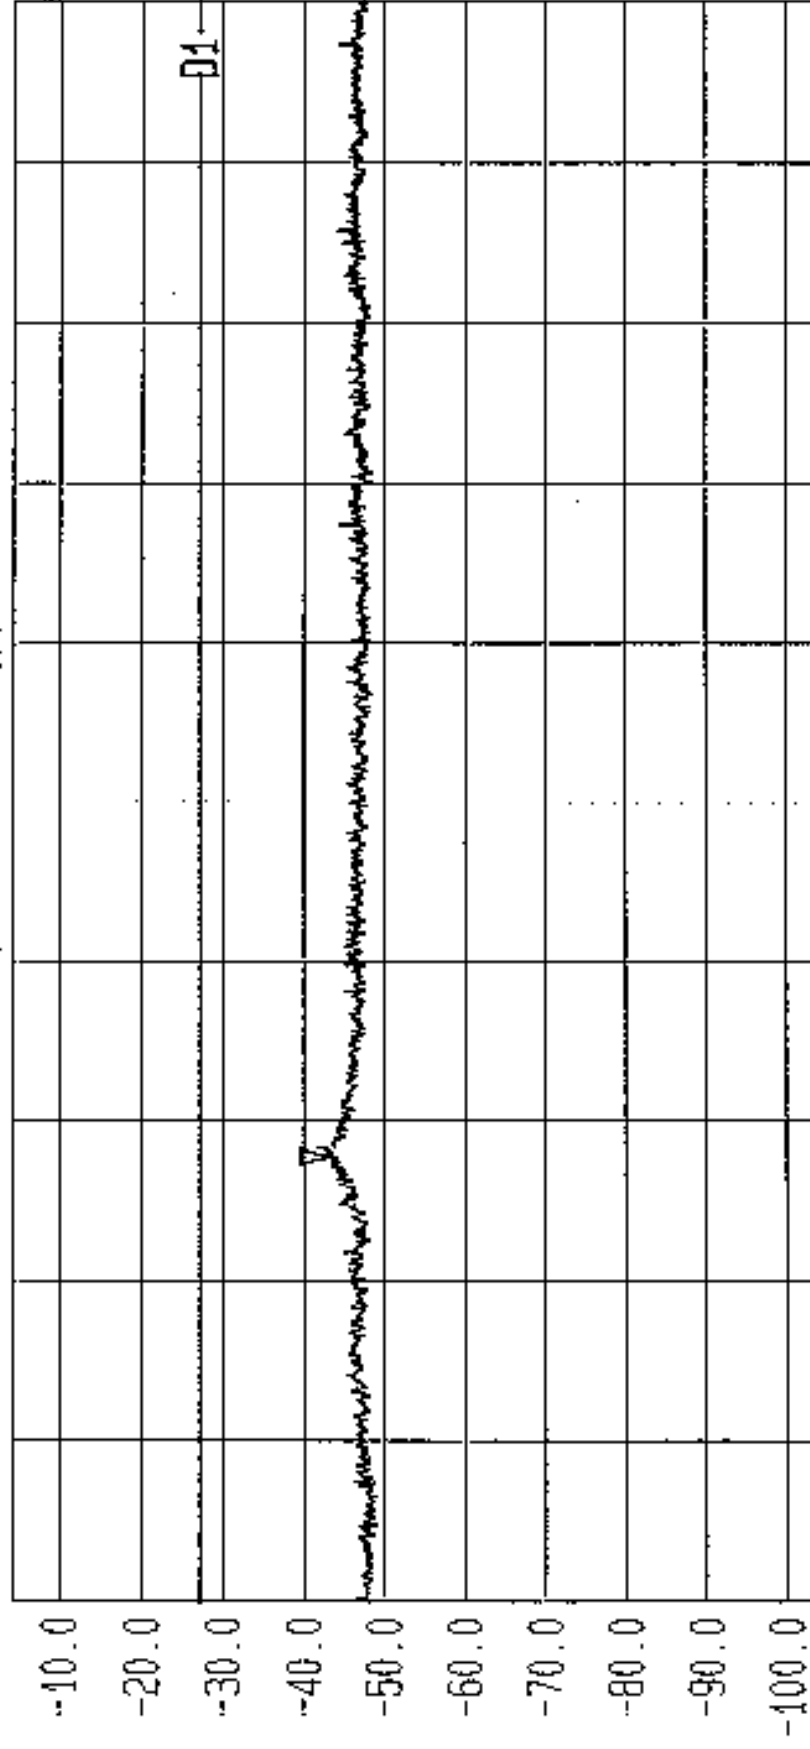

PA
10

Radiated. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit.
Limit. D1: -27dBm. FCC Part 15.407(b) TX: 5.25-5.35GHz. Top Chan. GPH/38658/J004/131

LV1 OFF


Date 29.Mar.'99 Time 16:49:34

Ref.Lvl -4.30 dBm
 Marker -99.6 dBm/Hz
 14.0338 GHz

F1 OFF D1
 F2 OFF D2
 F2-F1 OFF D1-D2

-27.00 dBm
 OFF
 OFF

Res.Bw 1 MHz [imp]
 TG.Lvl off
 CF.Stp 550.000 MHz
 Vid.Bw 1 MHz
 AF.Att 0 dB
 Unit [dBm]

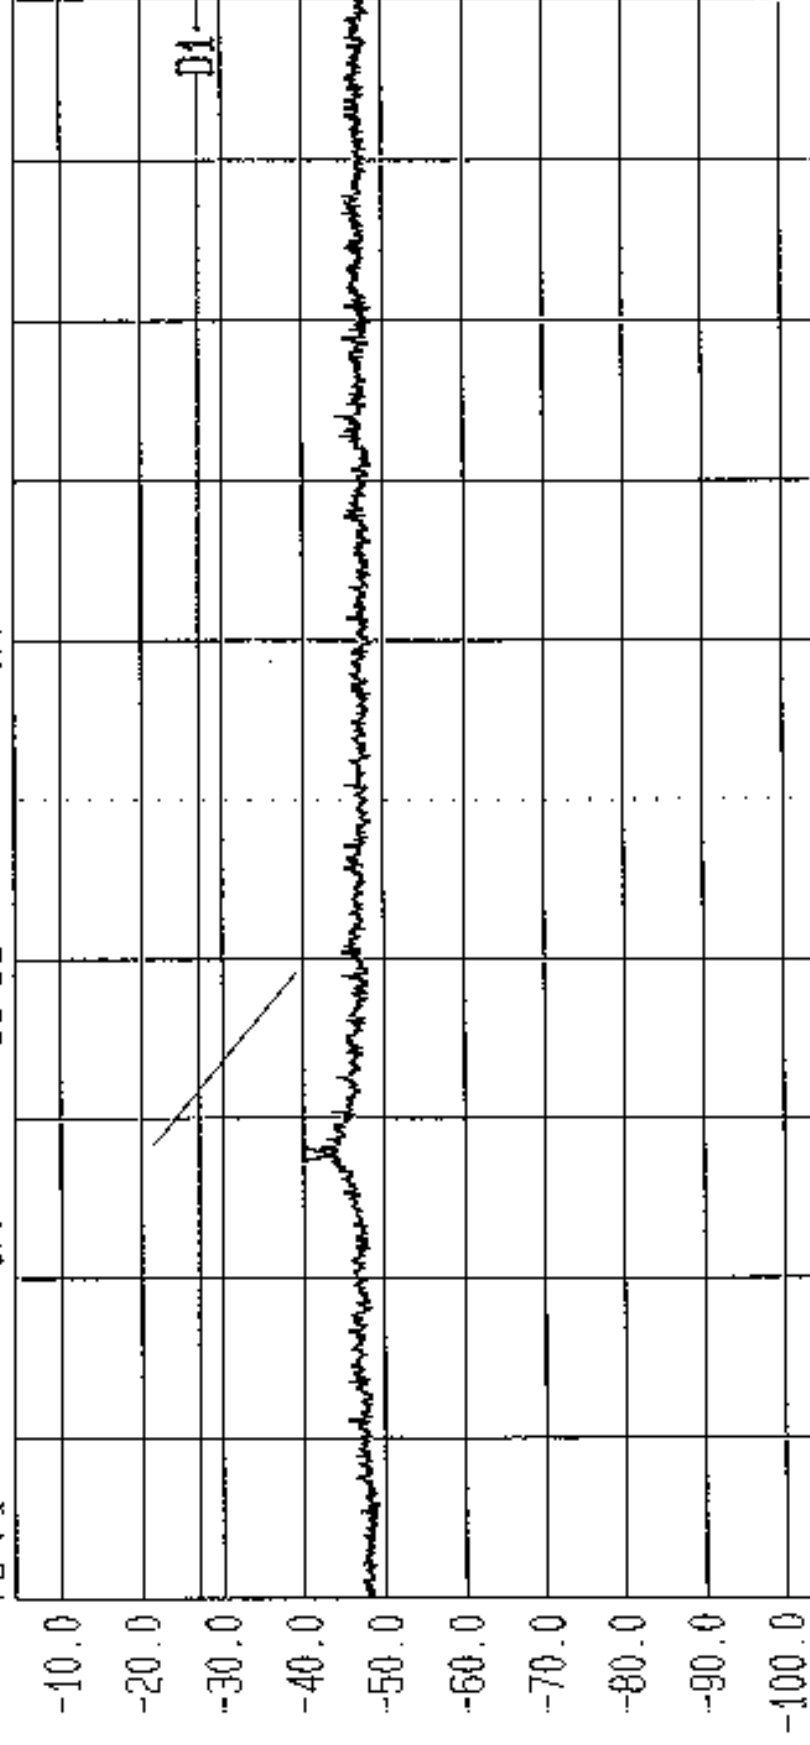

PA
 10

Start 12.5 GHz Span 5.5 GHz Center 15.25 GHz Sweep 40 ms Stop 18 GHz

Radiated. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit.
 Limit. DI: -27dBm. FCC Part 15.407 (b) TX: 5.725-5.825GHz. Bot Chan. 6PH/38658/JD04/132


LVL OFF

Date: 29.Mar.'99 Time 16:56:01

Ref.Lvl -4.30 dBm
 Marker -99.4 dBm/Hz
 14.0338 GHz

Res.BW 1 MHz [imp]
 1 MHz
 TG.Lvl off
 CF.Stp 550.000 MHz
 RF.Att 0 dB
 Unit [dBm]

F1 OFF D1
 F2 OFF D2
 F2-F1 OFF D1-D2
 -27.00 dBm
 OFF
 OFF

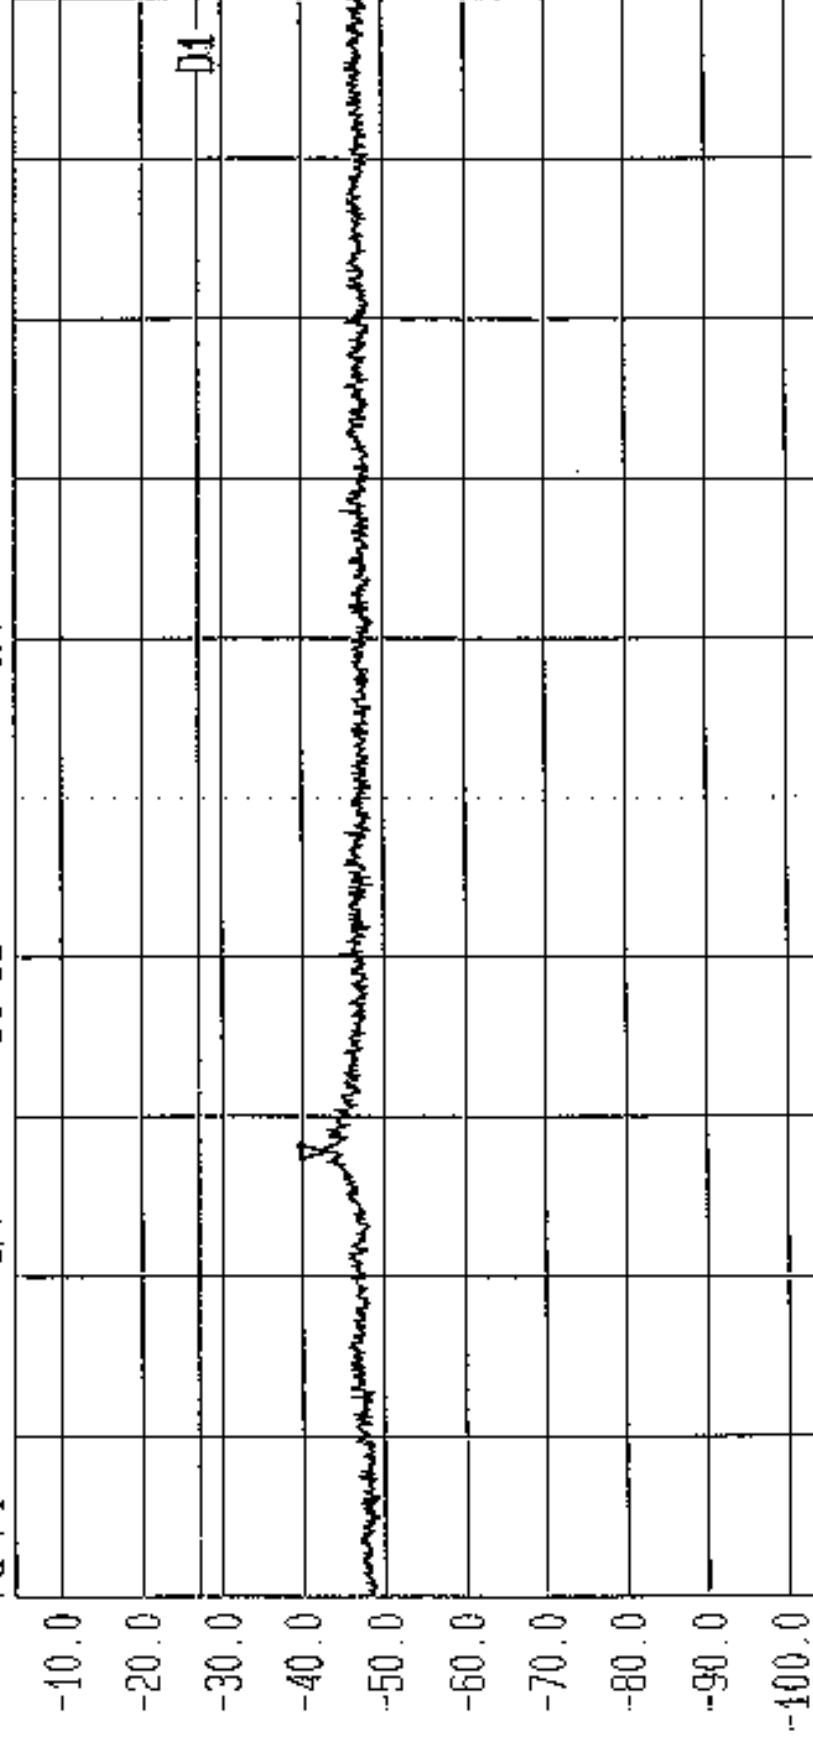

PA
 10


Start 12.5 GHz
 Span 5.5 GHz
 Center 15.25 GHz
 Sweep 40 ms
 Stop 18 GHz

Radiated. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit.
 Limit. D1: -27dBm. FCC Part 15.407 (b) TX: 5.725-5.825GHz. Top Chan. GPH/38658/JD04/133

Date 29.Mar.'99 Time 17:01:48
 Ref.Lvl 1.20 dBm
 Marker -96.2 dBm/Hz
 20.3705 GHz

Res.Bw 1 MHz [imp]
 TG.Lvl off
 CF.Stp 850.000 MHz
 RF.Att 0 dB
 Unit [dBm]

F1 OFF D1
 F2 OFF D2
 F2-F1 OFF D1-D2

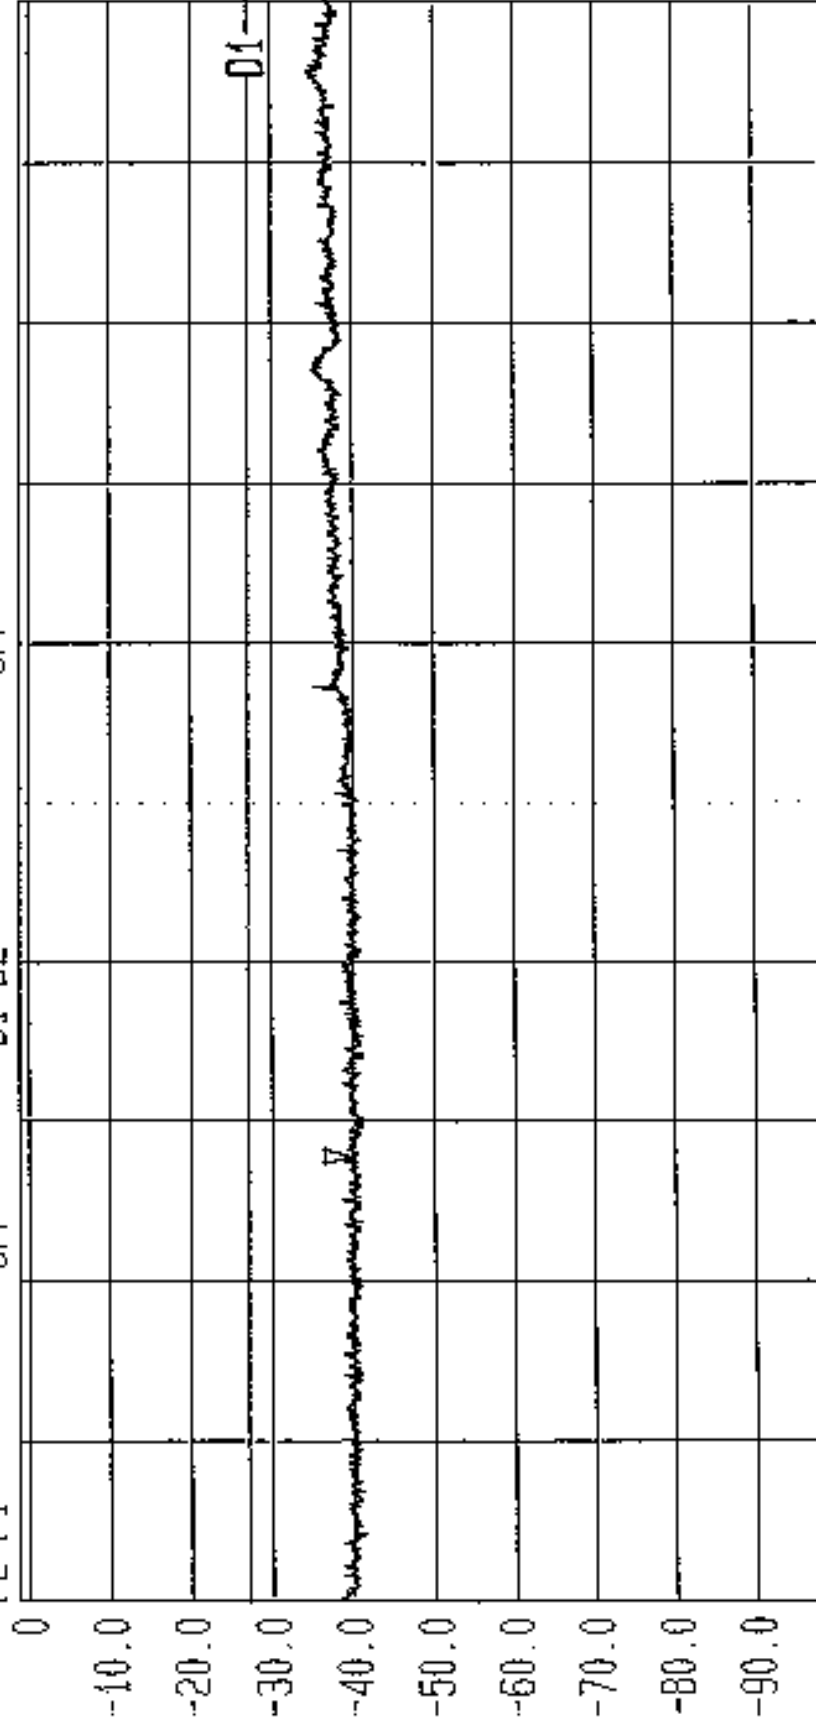

PA
 10

Start 18 GHz Span 8.5 GHz Center 22.25 GHz Sweep 60 ms Stop 26.5 GHz
 Radiated. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit.
 Limit. D1: -27dBm. FCC Part 15.407(b) TX: 5.15-5.25GHz. Bot Chan. GPH/38658/JD04/134


LVLOFF

Date 29.Mar.'99 Time 17:07:43

Ref.Lvl 1.20 dBm
Marker -96.3 dBm/Hz
20.3705 GHz

Res.Bw 1 MHz (imp)
1G.Lvl off
CF.Stp 850.000 MHz
PF.Att 0 dB
Unit (dBm)

F1 OFF D1
F2 OFF D2
F2-F1 OFF D1-D2
-27.00 dBm
OFF
OFF

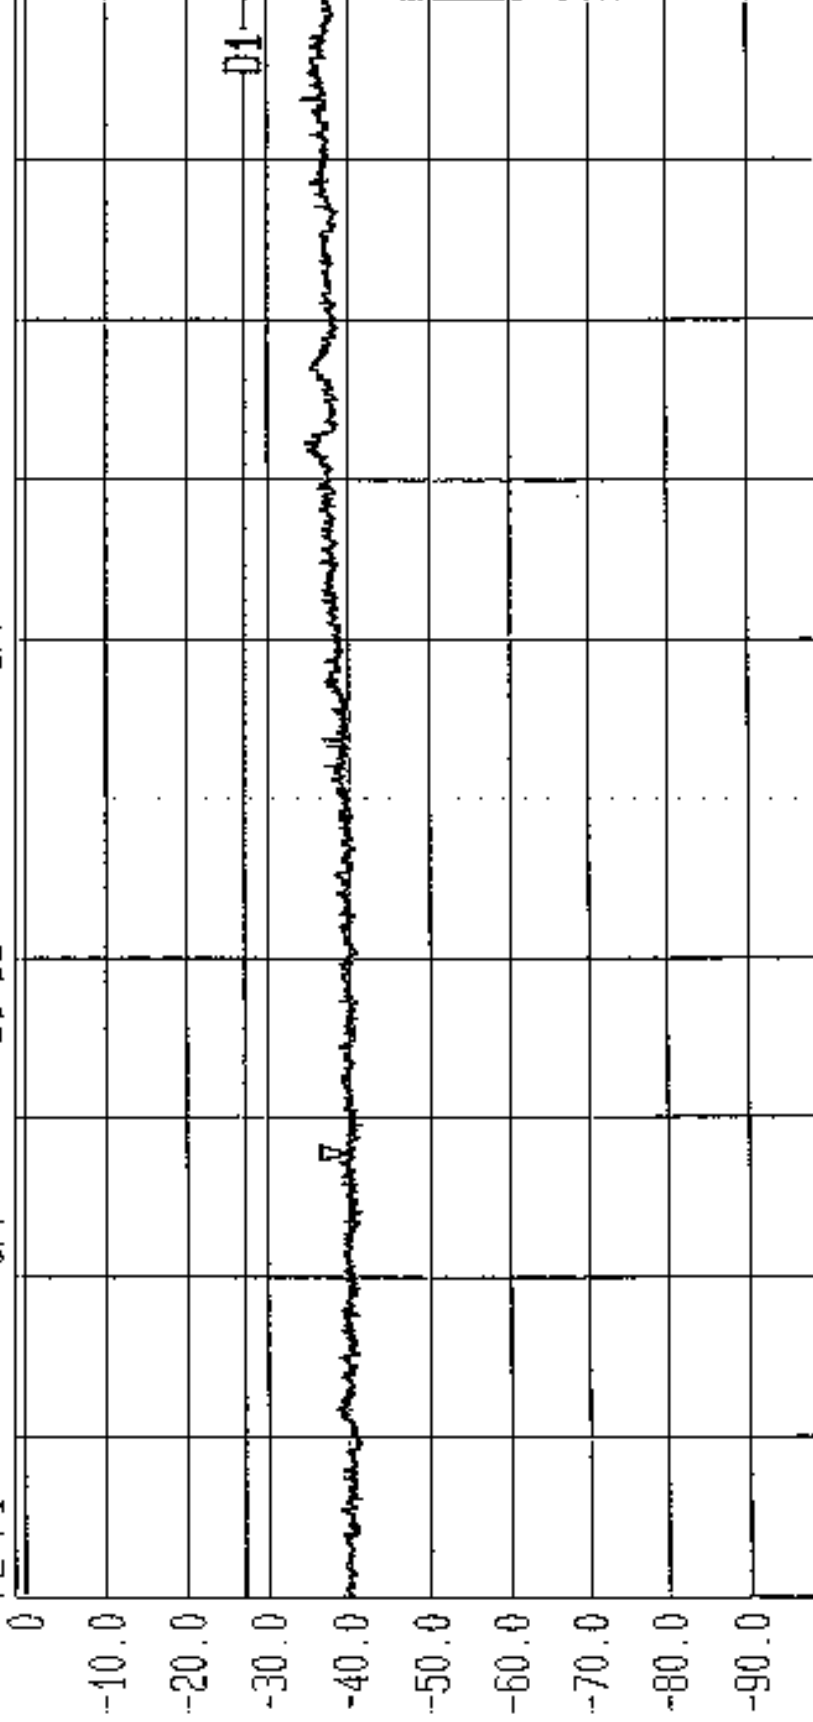

PA
10

Start 18 GHz
Span 8.5 GHz
Center 22.25 GHz
Sweep 60 ms
Stop 26.5 GHz

Radiated. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit.
Limit. D1: -27dBm. FCC Part 15.407(b) TX: 5.15-5.25GHz. Top Chan. GPH/38658/JD04/135


LVL OFF

Date 29.Mar.'99 Time 17:13:22

Ref.Lvl 1.20 dBm
Marker -91.7 dBm/Hz
26.1600 GHz

Res.BW 1 MHz [imp]
1G.Lvl off
CF.Stp 850.000 MHz
RF.Att 0 dB
Unit [dBm]

F1 OFF D1
F2 OFF D2
F2-F1 OFF D1-D2

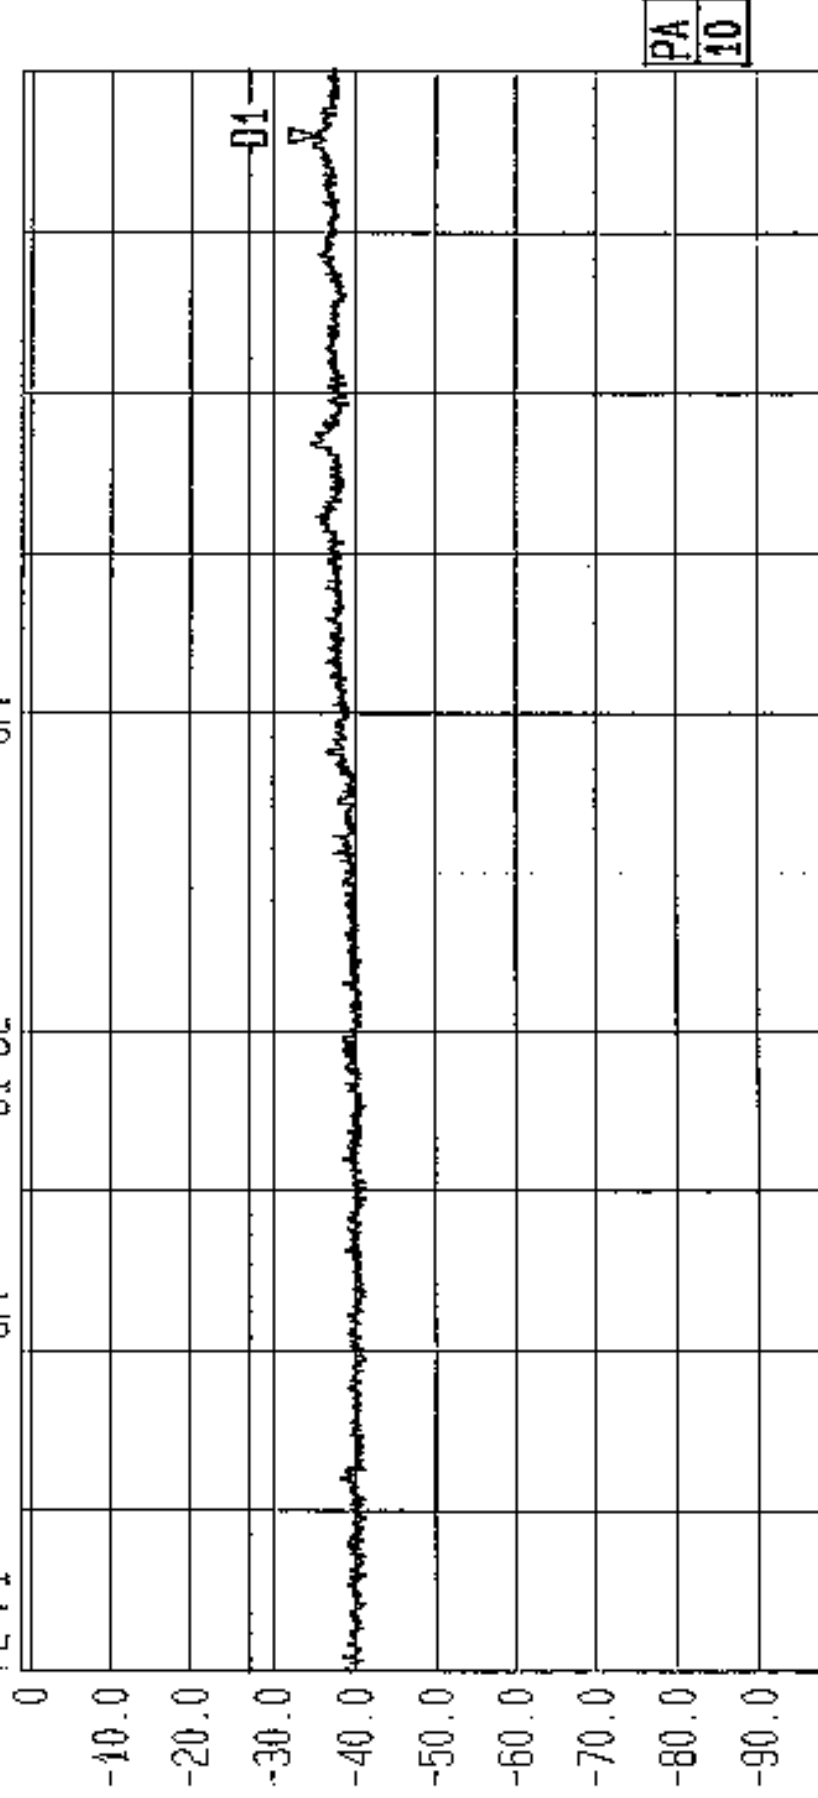

PA 10

Start 18 GHz
Span 8.5 GHz
Center 22.25 GHz
Sweep 60 ms
Stop 26.5 GHz

Radiated. Tested by AFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit.
Limit: D1: -27dBm. FCC Part 15.407(b) TX: 5.25-5.35GHz. Bot Chan. GPH/3865B/JD04/136


LVL OFF

Date 29.Mar.'99 Time 17:19:08

Ref.Lvl 1.20 dBm
Marker -91.4 dBm/Hz
26.1033 GHz

F1 OFF D1
F2 OFF D2
F2-F1 OFF D1-D2

Res.Bw 1 MHz [imp]
FG.Lvl off
CF.Stp 850.000 MHz
RF.Att 0 dB
Unit [dBm]

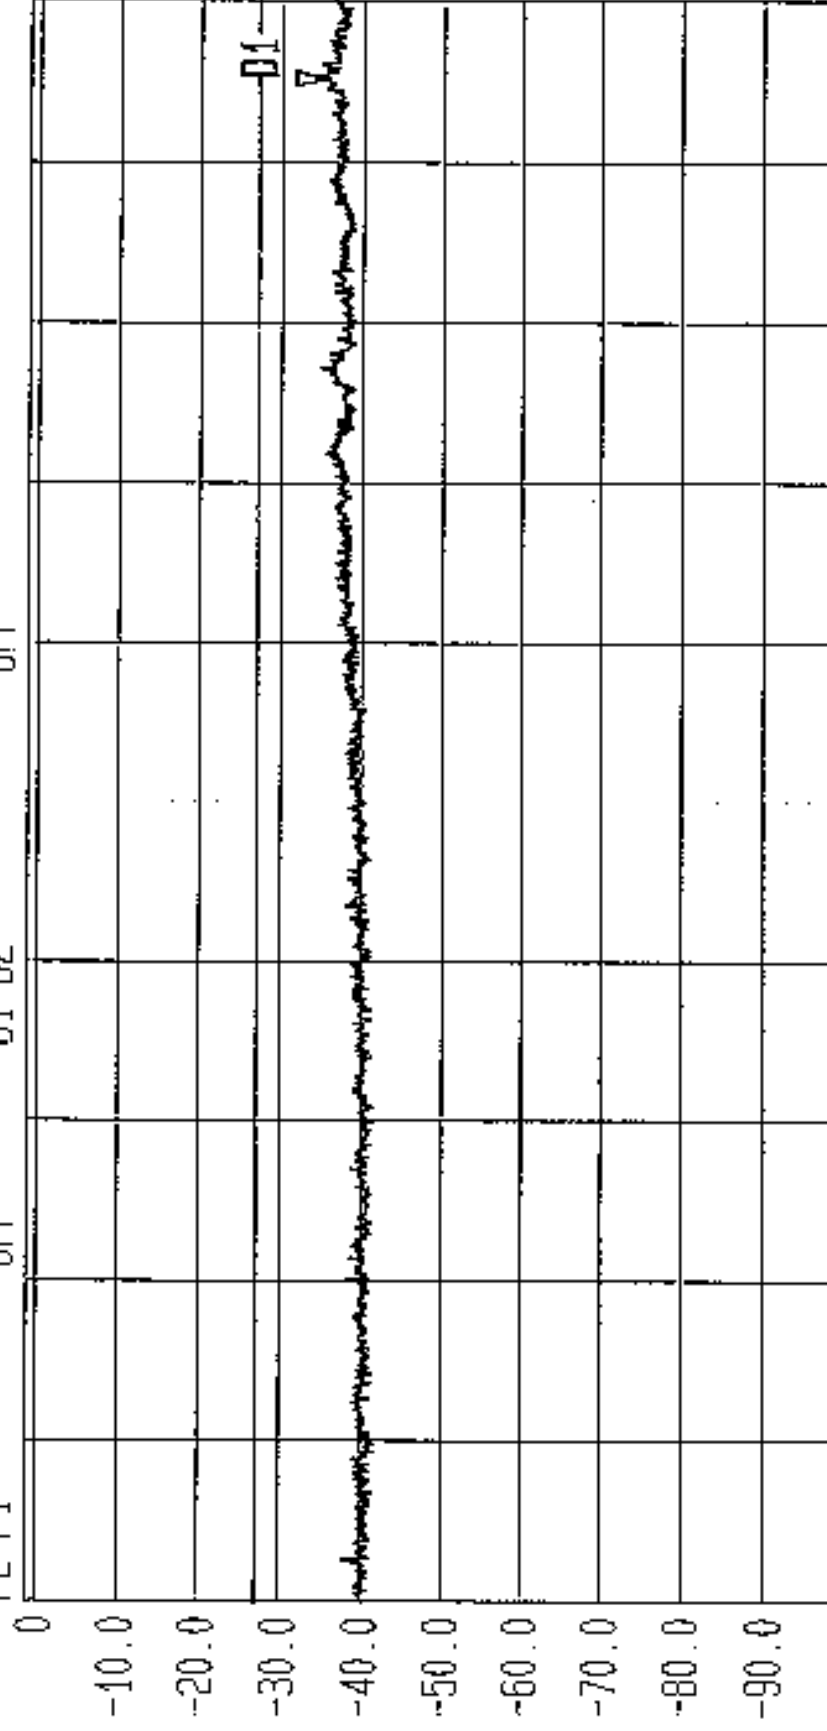


PA
10

Start 18 GHz Span 8.5 GHz Center 22.25 GHz Sweep 60 ms Stop 26.5 GHz

Radiated. Tested by RFI for Adaptive Broadband Ltd.. EUT: AB Access Subscriber Unit.
Limit. D1: -27dBm. FCC Part 15.407(b) TX: 5.25-5.35GHz. Top Chan. GPH/38658/JD04/137

LVLOFF
 Date 29.Mar.'99 Time 17:24:45
 Ref.Lvl 1.20 dBm
 Marker -92.1 dBm/Hz
 24.5355 GHz
 F1 OFF D1
 F2 OFF D2
 F2-F1 OFF D1-D2
 Res.Bw 1 MHz [imp]
 TG.Lvl off
 CF.Stp 850.000 MHz
 Vid.Bw 1 MHz
 RF.Atte 0 dB
 Unit [dBm]
 -27.00 dBm
 OFF
 OFF

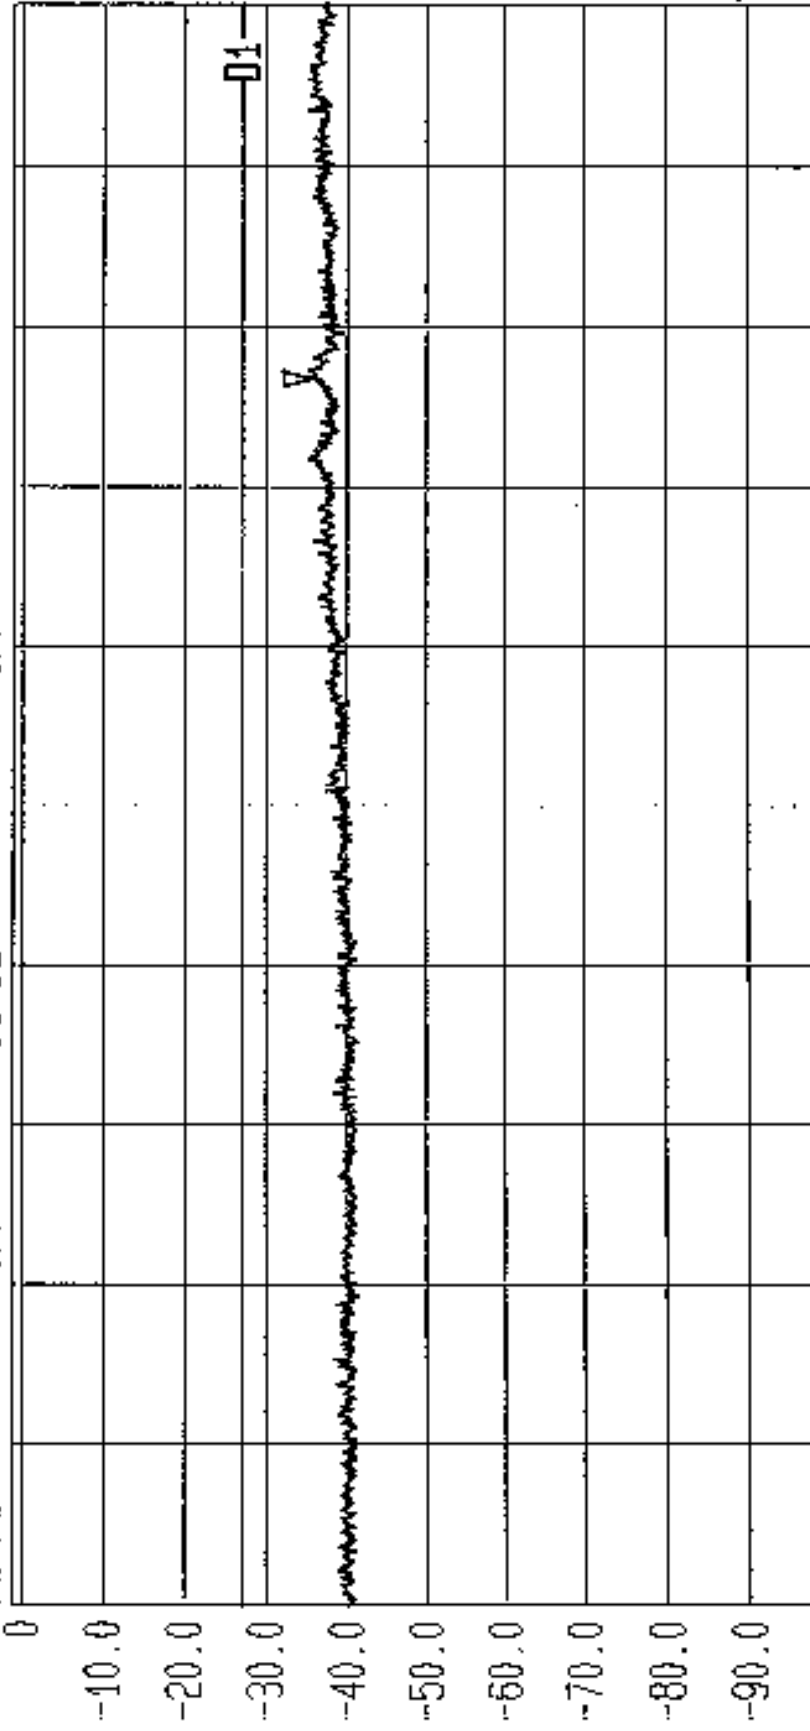

PA
10

Start 18 GHz
 Span 8.5 GHz
 Center 22.25 GHz
 Sweep 60 ms
 Stop 26.5 GHz
 Radiated. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit.
 Limit. D1: -27dBm. FCC Part 15.407(b) TX: 5.725-5.825GHz. Bot Chan. GPH/38658/JD04/138

LVLOFF

Date 29.Mar.'99 Time 17:32:03


Ref.Lvl 1.20 dBm
Marker -92.1 dBm/Hz
26.1788 GHz

Res.Bw 1 MHz [imp]
TG.Lvl off
CF.Stp 850.000 MHz
Vid.Bw 1 MHz
RF.Att 0 dB
Unit [dBm]

F1 OFF D1 -27.00 dBm

F2 OFF D2 OFF

F2-F1 OFF D1-D2 OFF

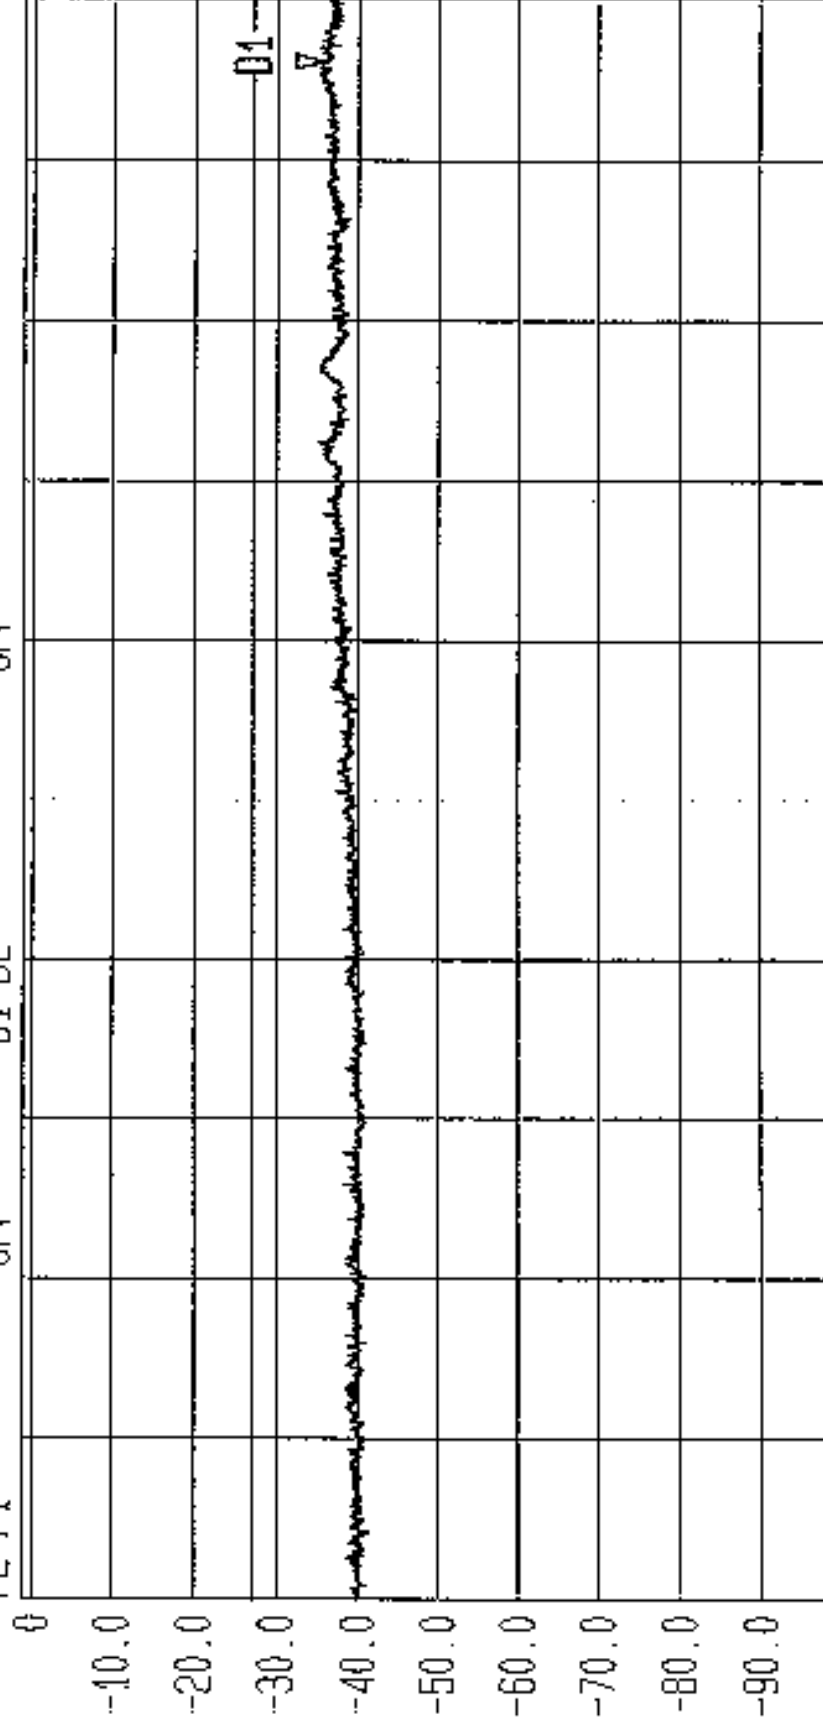


PA 10

Start 18 GHz Span 8.5 GHz Center 22.25 GHz Sweep 60 ms Stop 26.5 GHz

Radiated. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit.
Limit. D1: -27dBm. FCC Part 15.407(b) TX: 5.725-5.825GHz. Top Chan. 6PH/38658/JD04/139


LVLOFF
 Date 10.Jan.'87 Time 14:28:34
 Ref.Lvl -20.00 dBm
 Marker -90.7 dBm/Hz
 CF.Stp 35.3350 GHz
 Res.Bw 1.0 MHz [3dB]
 Vid.Bw 1 MHz
 RF.Att 0 dB
 Unit (dBm)

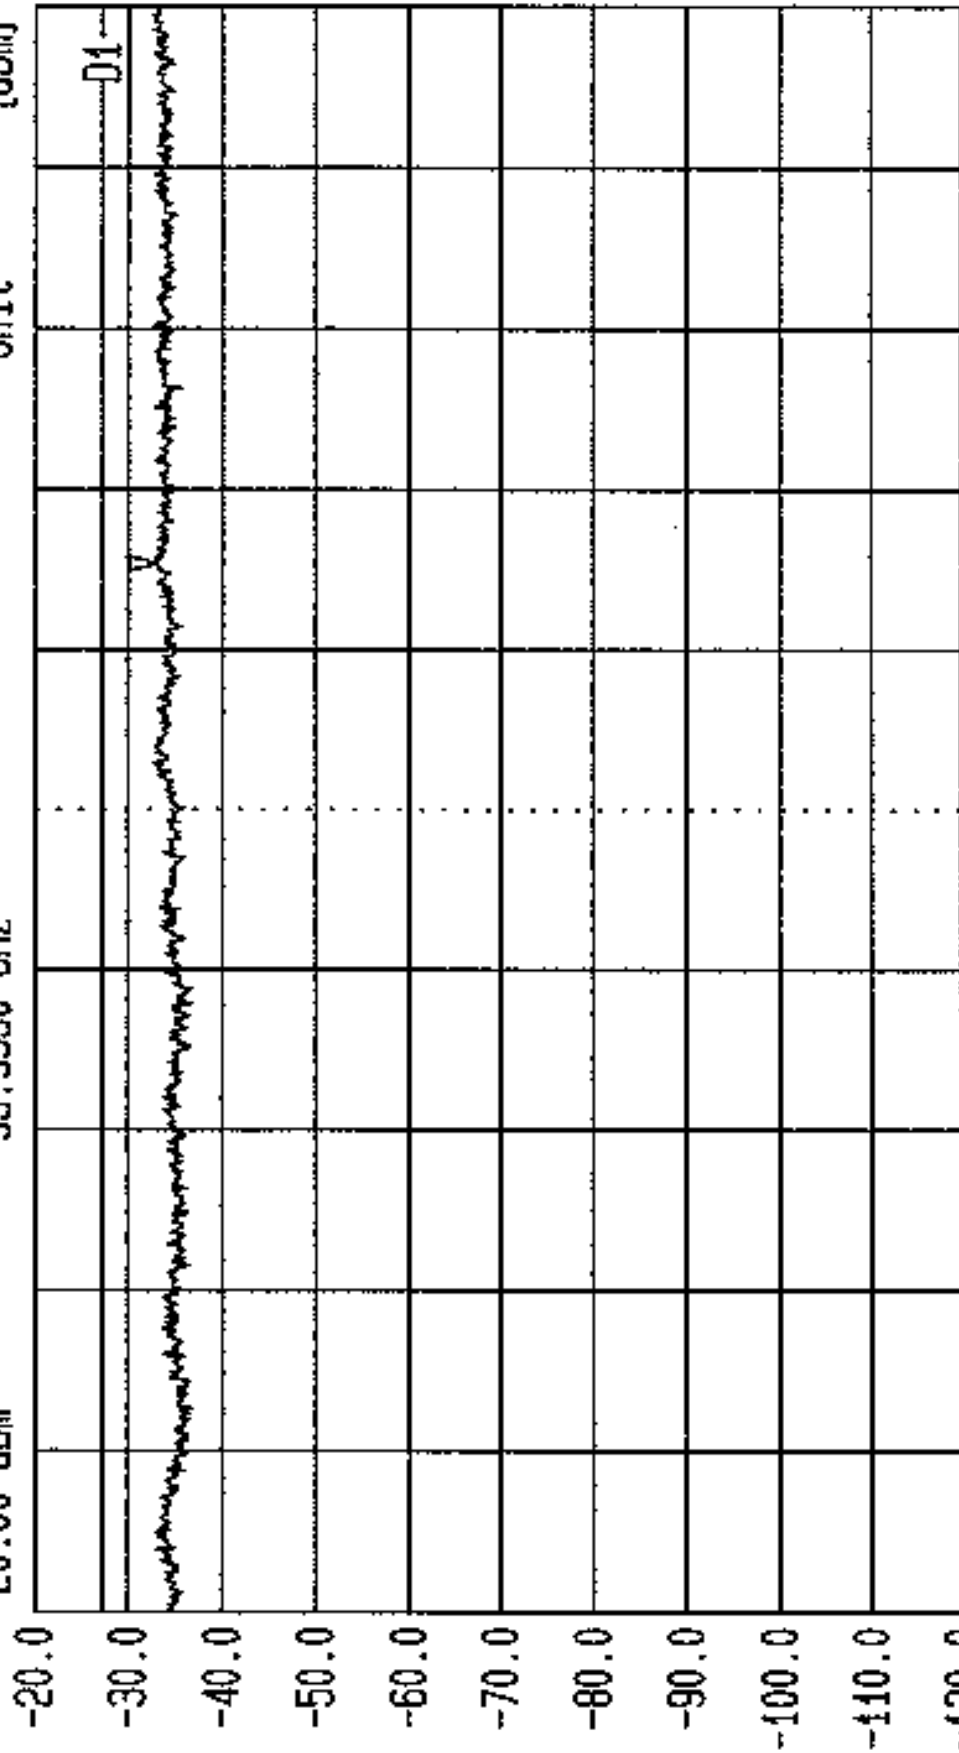

Start 25.5 GHz
 Span 13.5 GHz
 Center 33.25 GHz
 Sweep 60 ms
 Stop 40 GHz


Radiated, Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit.
 Limit: D1: -27dBm. FCC Part 15.407(b) TX: 5.15-5.25GHz. Bot Chan. 6PH/38658/JD04/140

LVLOFF
 Date 10-Jan-'87 Time 14:33:40
 Ref.Lvl -20.00 dBm
 Marker -91.0 dBm/Hz
 CF.Stp 39.8350 GHz
 Res.Bw 1.0 MHz [3dB]
 Vid.Bw 1 MHz
 RF.Att 0 dB
 Unit [dBm]

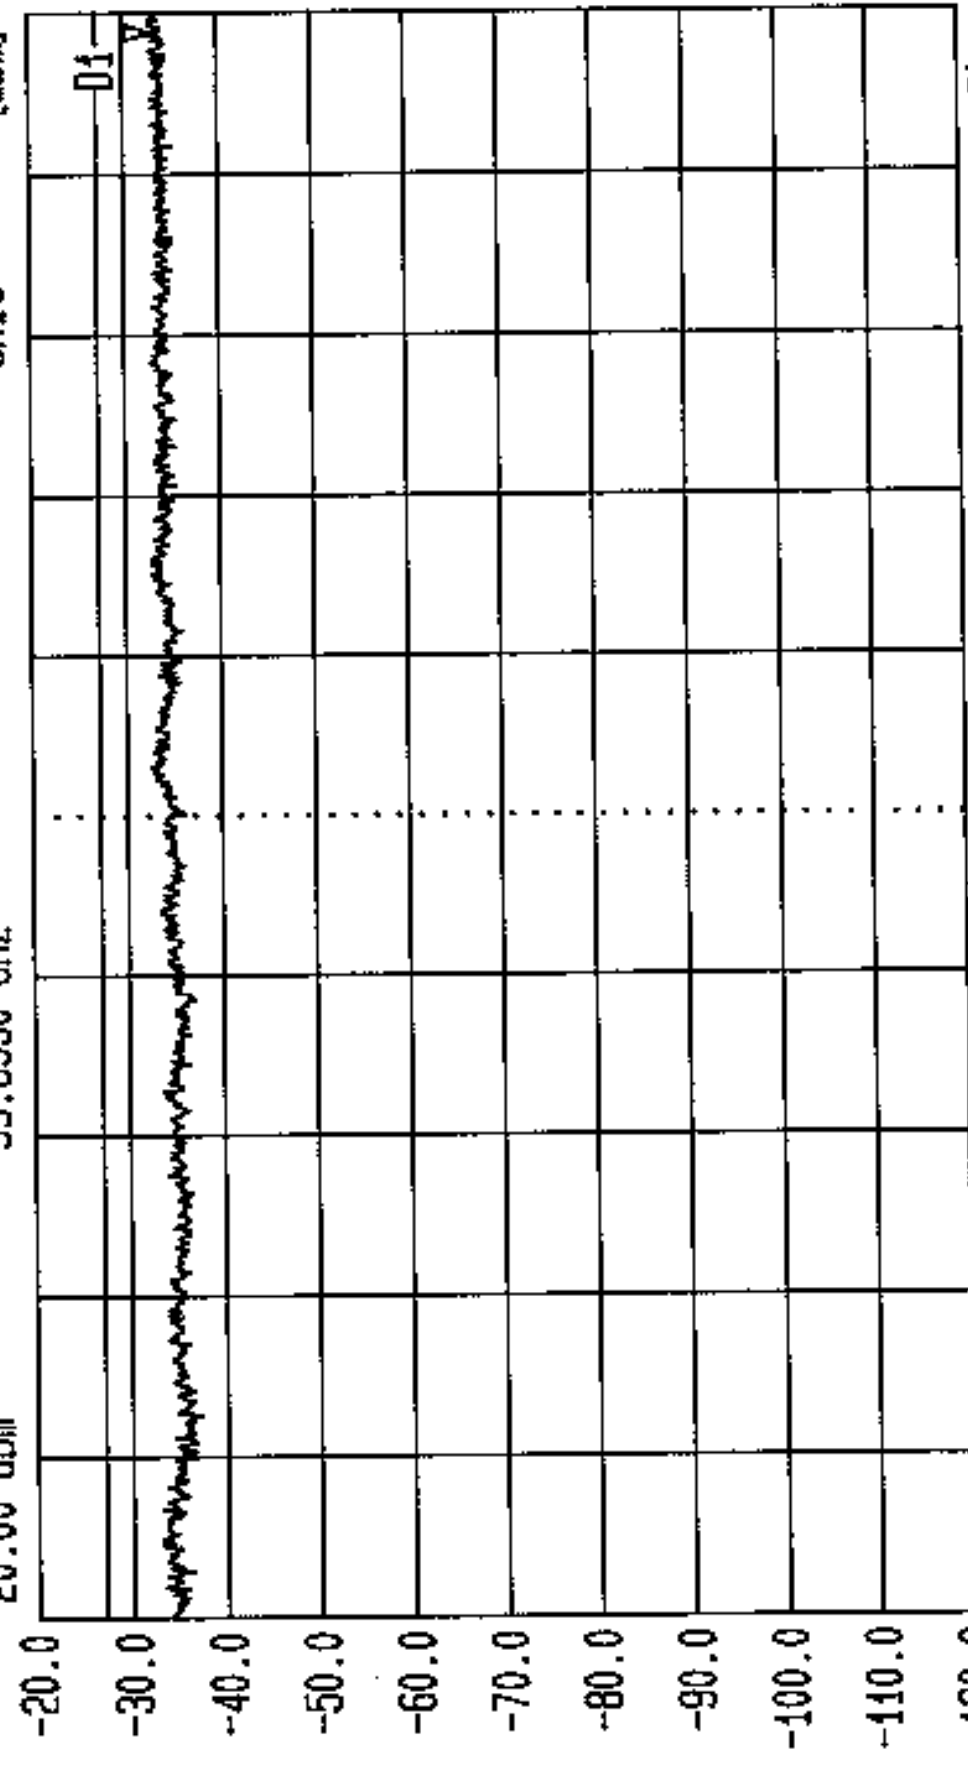


Start 25.5 GHz
 Span 13.5 GHz
 Center 33.25 GHz
 Sweep 60 ms
 Stop 40 GHz
 Radiated, Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit.
 Limit: D1: -27dBm, FCC Part 15.407(b) TX: 5.15-5.25GHz, Top Chan. GPH/38658/JD04/141


 LVLOFF '87 Time 14:38:31
 Date 10-Jan-87
 Ref.Lvl -20.00 dBm
 Marker -90.7 dBm/Hz
 CF.Stp 35.3350 GHz
 Res.Bw 1.0 MHz [3dB]
 Vid.Bw 1 MHz
 RF.Att 0 dB
 Unit [dBm]

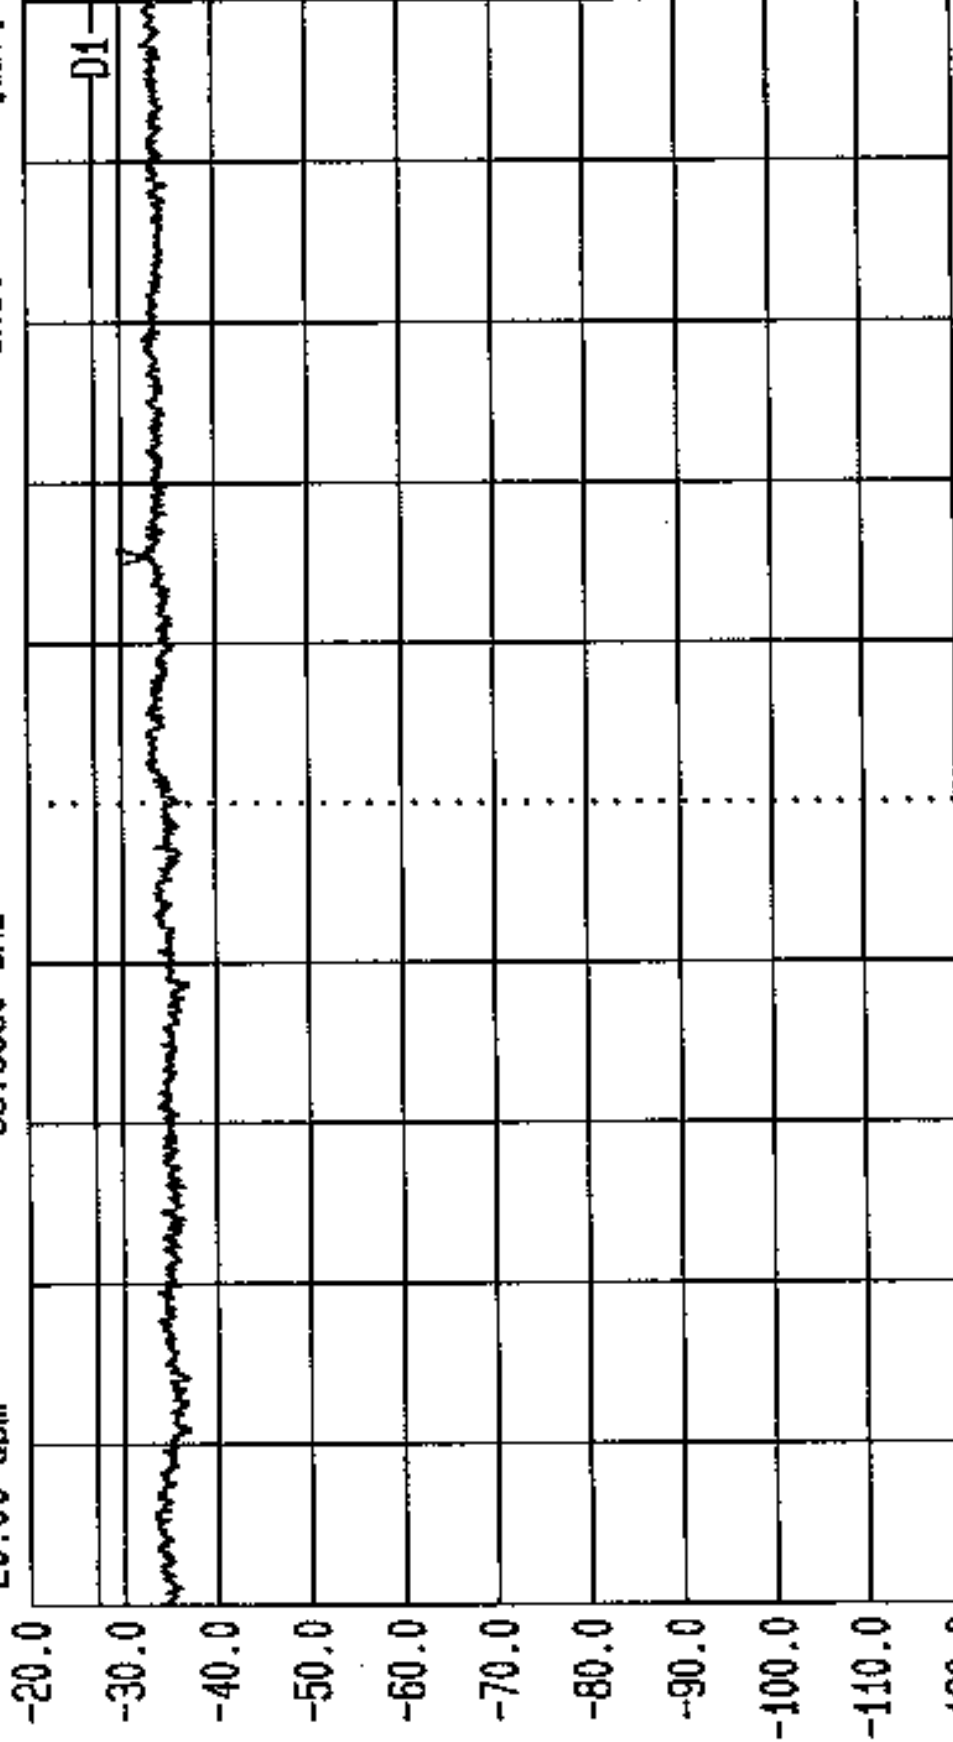

Start 26.5 GHz Span 13.5 GHz Center 33.25 GHz Sweep 60 ms Stop 40 GHz
 Radiated, Tested by RFI for Adaptive Broadband Ltd, EUT: AB Access Subscriber Unit.
 Limit: D1: -27dBm. FCC Part 15.407(b) TX: 5.25-5.35GHz. Bot Chan. GPH/38658/JD04/142


 LVLOFF
 Date 10. Jan. '87 Time 14:42:34
 Ref.Lvl -20.00 dBm
 Marker -90.9 dBm/Hz
 Res.Bw 1.0 MHz [3dB]
 CF.Stp 1.350 GHz
 RF.Att 0 dB
 Unit [dBm]
 Vid.Bw 1 MHz

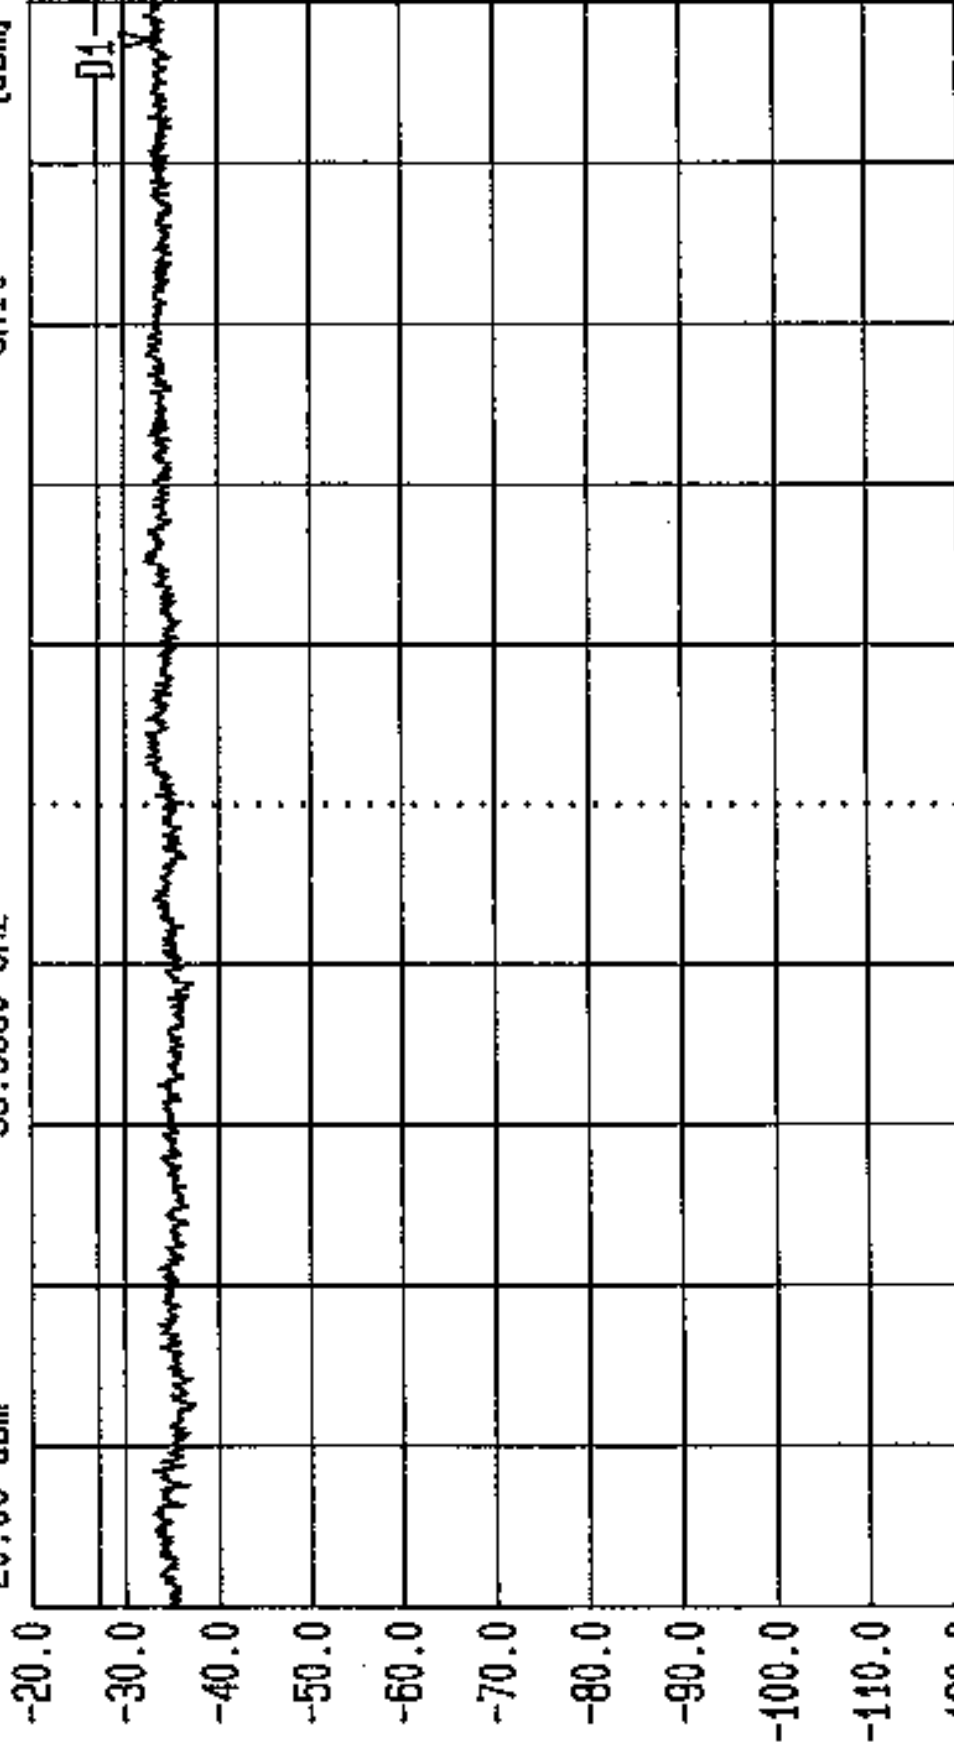


Start 26.5 GHz
 Span 13.5 GHz
 Center 33.25 GHz
 Sweep 60 ms
 Stop 40 GHz
 Radiated, Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit.
 Limit. D1: -27dBm. FCC Part 15.407(b) TX: 5.25-5.35GHz. Top Chan. GPH/38658/JD04/143

LVLOFF



Date 10.Jan.'87 Time 14:50:19
 Ref.Lvl -20.00 dBm
 Marker -91.2 dBm/Hz
 39.6850 GHz

Res.Bw 1.0 MHz [3dB] Vid.Bw 1 MHz
 CF.Stp 1.350 GHz RF.Att 0 dB
 Unit [dBm]

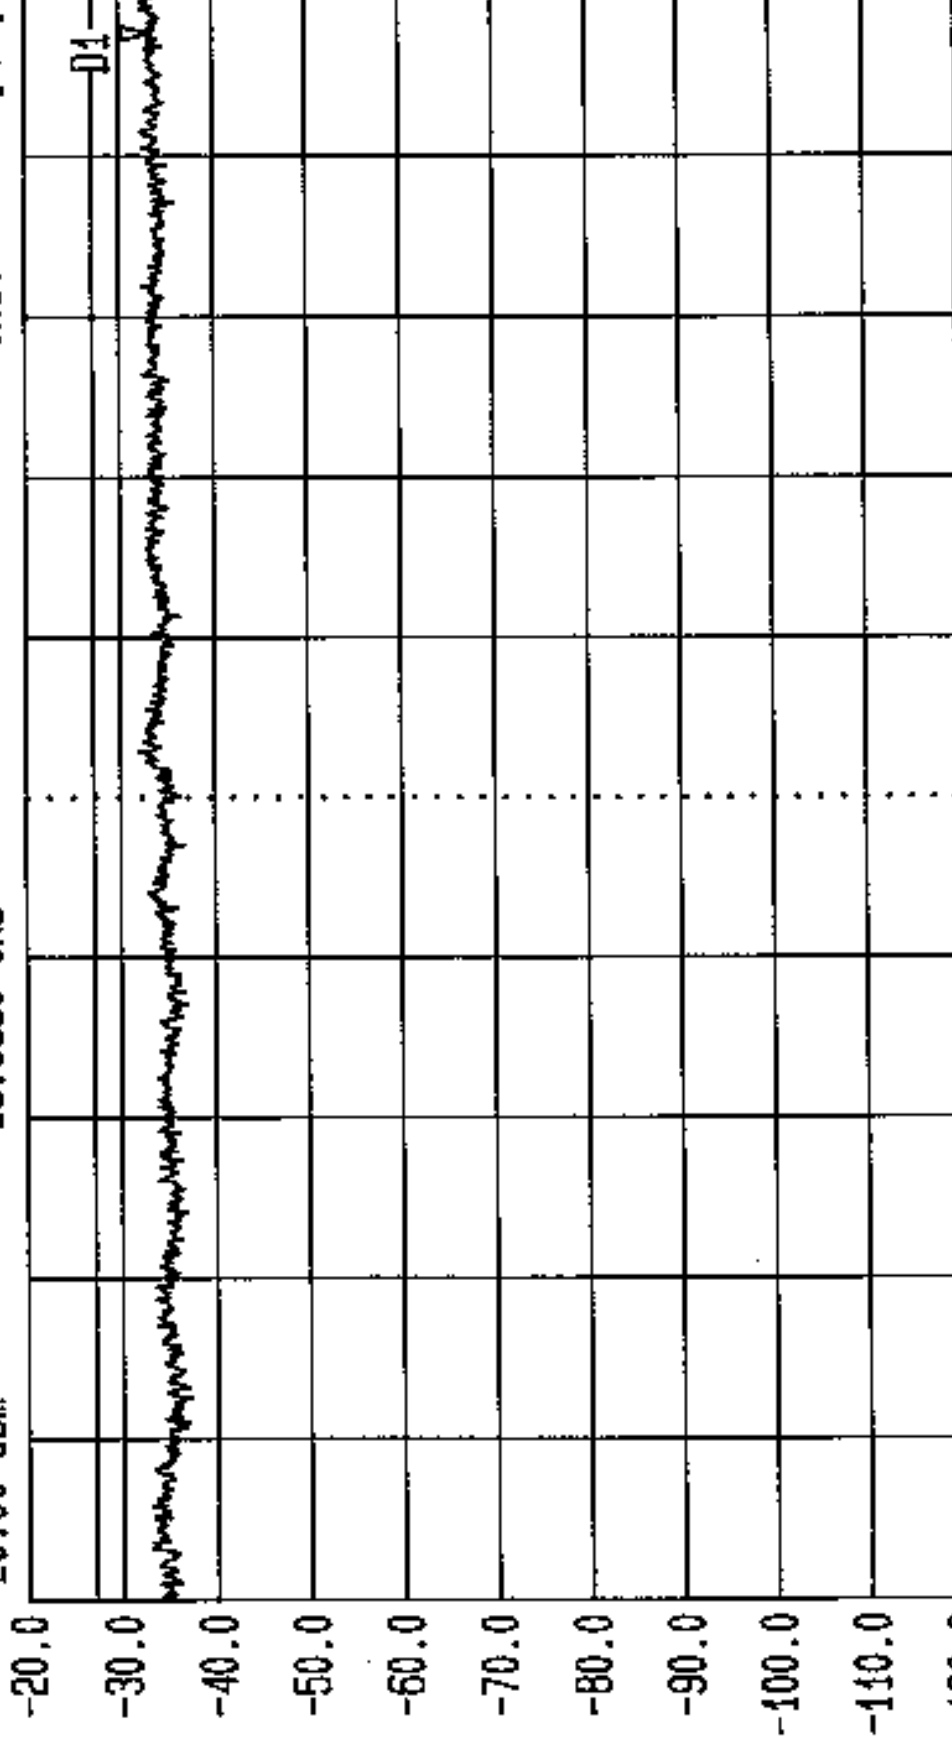

Start 26.5 GHz Span 13.5 GHz Center 33.25 GHz Sweep 60 ms Stop 40 GHz
 Radiated, Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit.
 Limit: D1: -27dBm. FCC Part 15.407 (b) TX: 5.725-5.825GHz. Bot Chan. GPH/38658/JD04/144



LVLOFF

Date 10.Jan.'87 Time 14:55:11

Ref.Lvl Marker

-20.00 dBm

-91.8 dBm/Hz

39.0400 GHz

1 MHz

Vid.BW

1.0 MHz [3dB]

Res.Bw

0 dB


RF.Att

1.350 GHz

CF.Stp

Unit

[dBm]

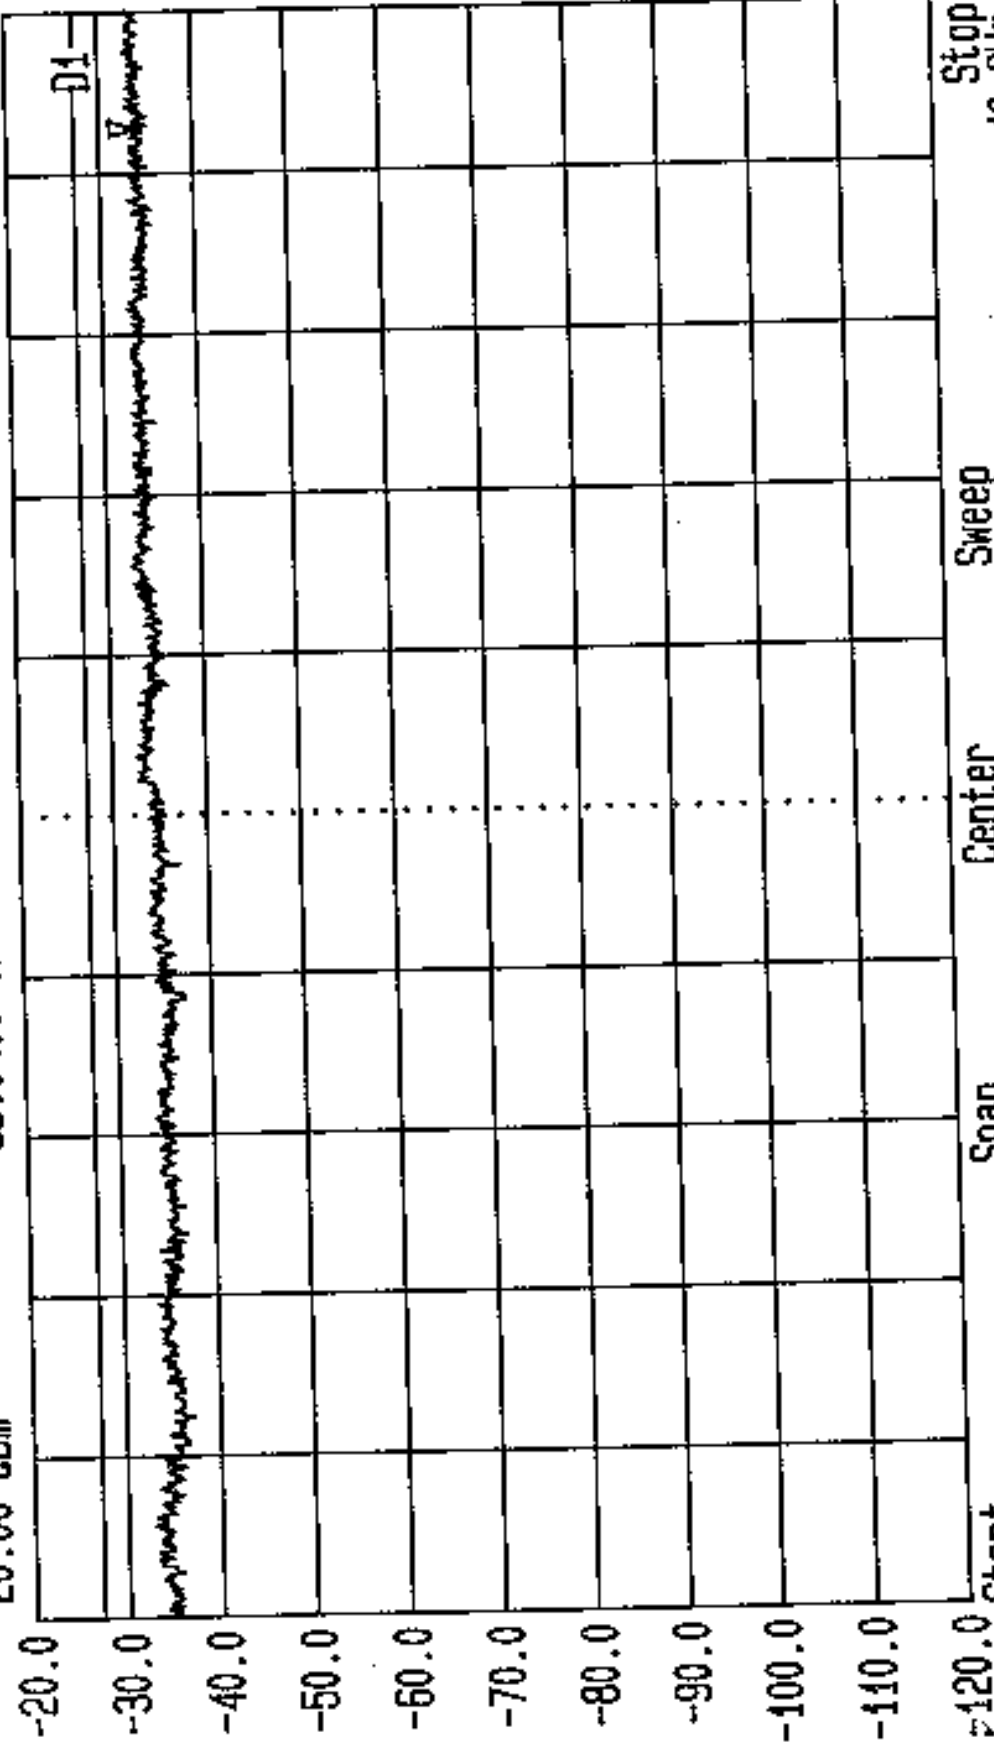

Start

26.5 GHz

Span

13.5 GHz

Center

33.25 GHz

Sweep

60 ms

Stop


40 GHz

Radiated, Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit.
Limit. D1: -27dBm. FCC Part 15.407(b) TX: 5.725-5.825GHz. Top Chan. GPH/38658/JD04/145



LVLOFF
Date 30.Mar.'99 Time 08:24:19
Ref.Lvl
-8.40 dBm

Res.Bw 1.0 MHz [3dB]
IG.Lvl off
CF.Stp 200.000 MHz
Vid.Bw 1 MHz
RF.Att 0 dB
Unit [dBm]

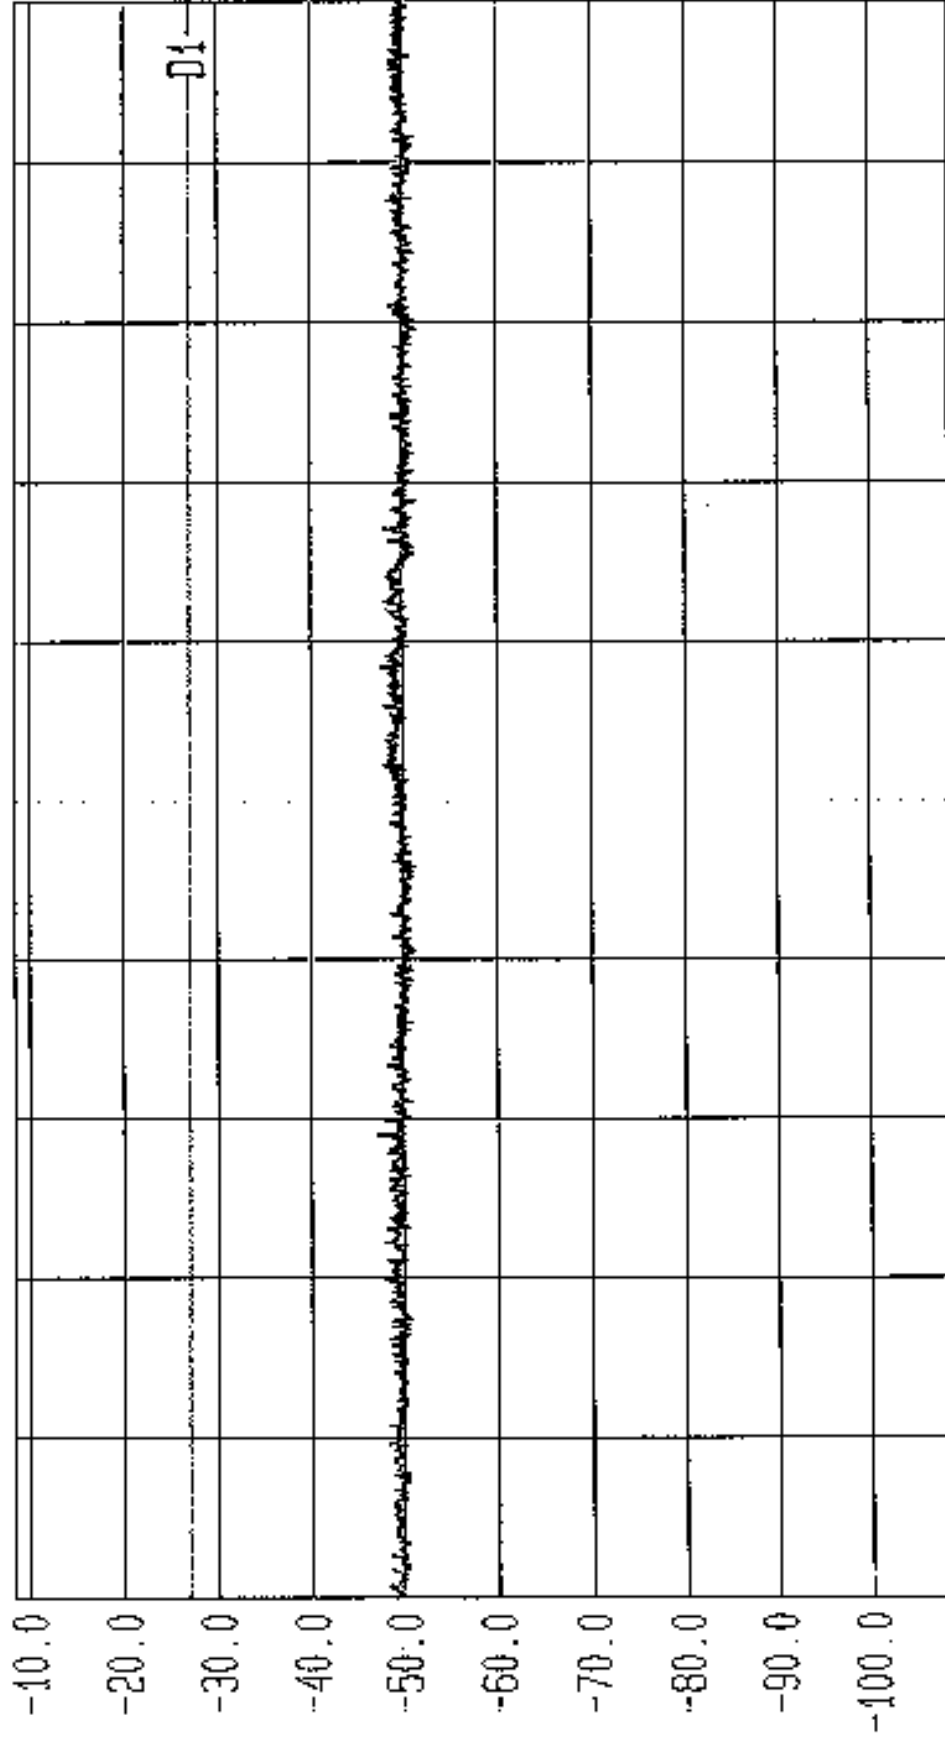

Start 2 GHz
Span 2 GHz
Center 3 GHz
Sweep 20 ms
Stop 4 GHz

Radiated, Tested by AFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit.
Limit, D1: -27dBm. FCC Part 15.407(b) TX: 5.15-5.25GHz. Bot Chan. GPH/38658/JD04/146



OFF

Date 30. Mar. '99 Time 08:29:15

Ref. Lvl -8.40 dBm

Marker -106.8 dBm/Hz

2.255 GHz

Res. Bw

10.0 MHz

3dB

Off

Vid. Bw


200.000 MHz

RF Att

0 dB

Unit

dBm

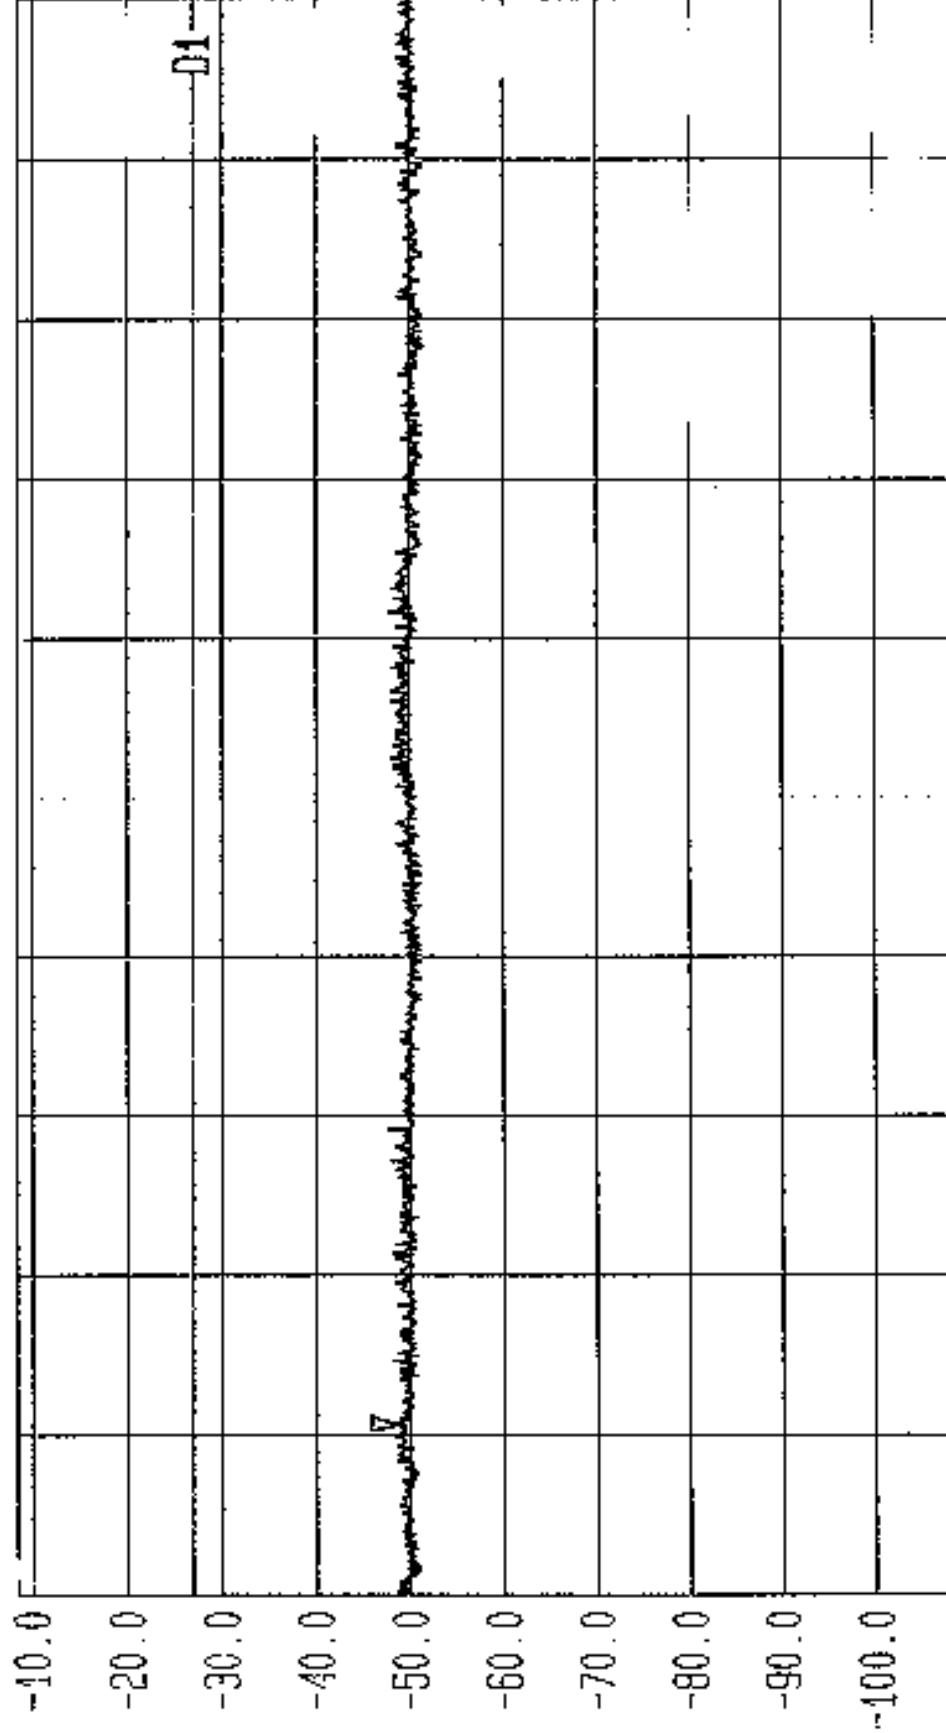

Radiated. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit.
Limit. Of: -27dBm. FCC Part 15.407(b) TX: 5.15-5.25GHz. Top Chan. GPH/38658/JD04/147



LVLOFF

Date 30.Mar.'99 Time 08:34:49

Ref.Lvl
-8.40 dBm

Marker -107.1 dBm/Hz

3.1577 GHz

Res.Bw

TG.Lvl

CF.Stp

1.0 MHz [3dB]

Off

200.000 MHz

Vid.Bw


RF.Att

Unit

1 MHz

0 dB

[dBm]

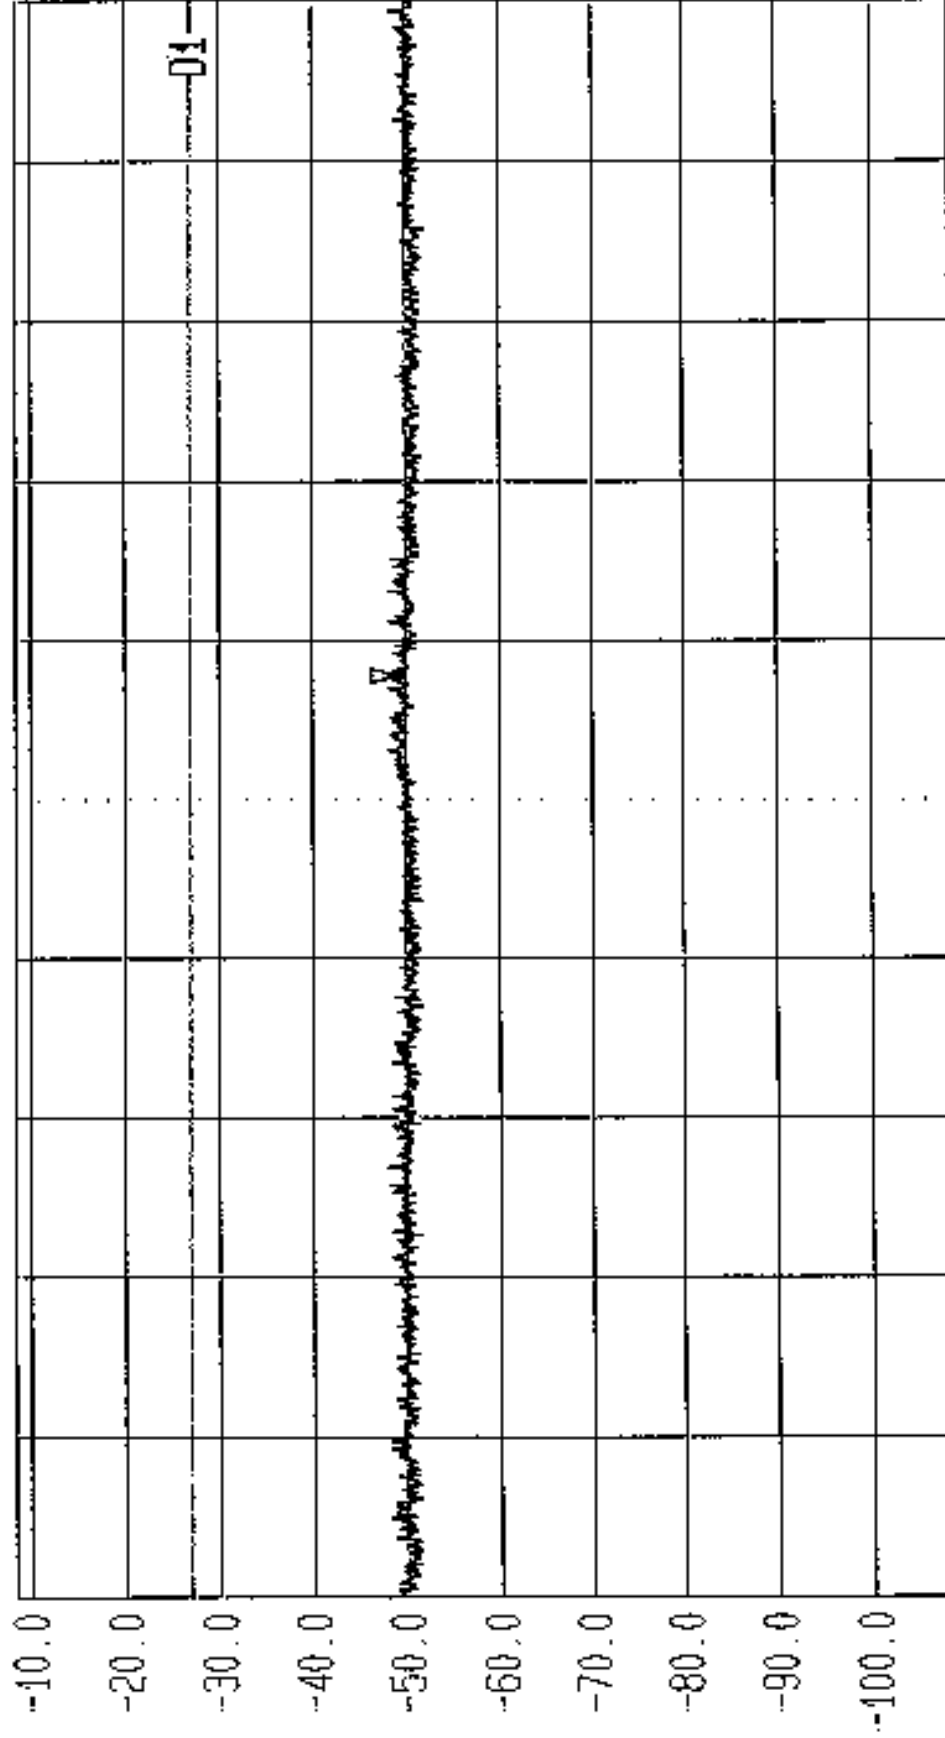


Start 2 GHz Stop 4 GHz
Sweep 20 ms

Radiated. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit.
Limit. D1: -27dBm. FCC Part 15.407(b) TX: 5.25-5.356GHz. Bot Chan. GPH/38658/J004/148



LVLOFF


Date 30.Mar.'99 Time 08:40:13

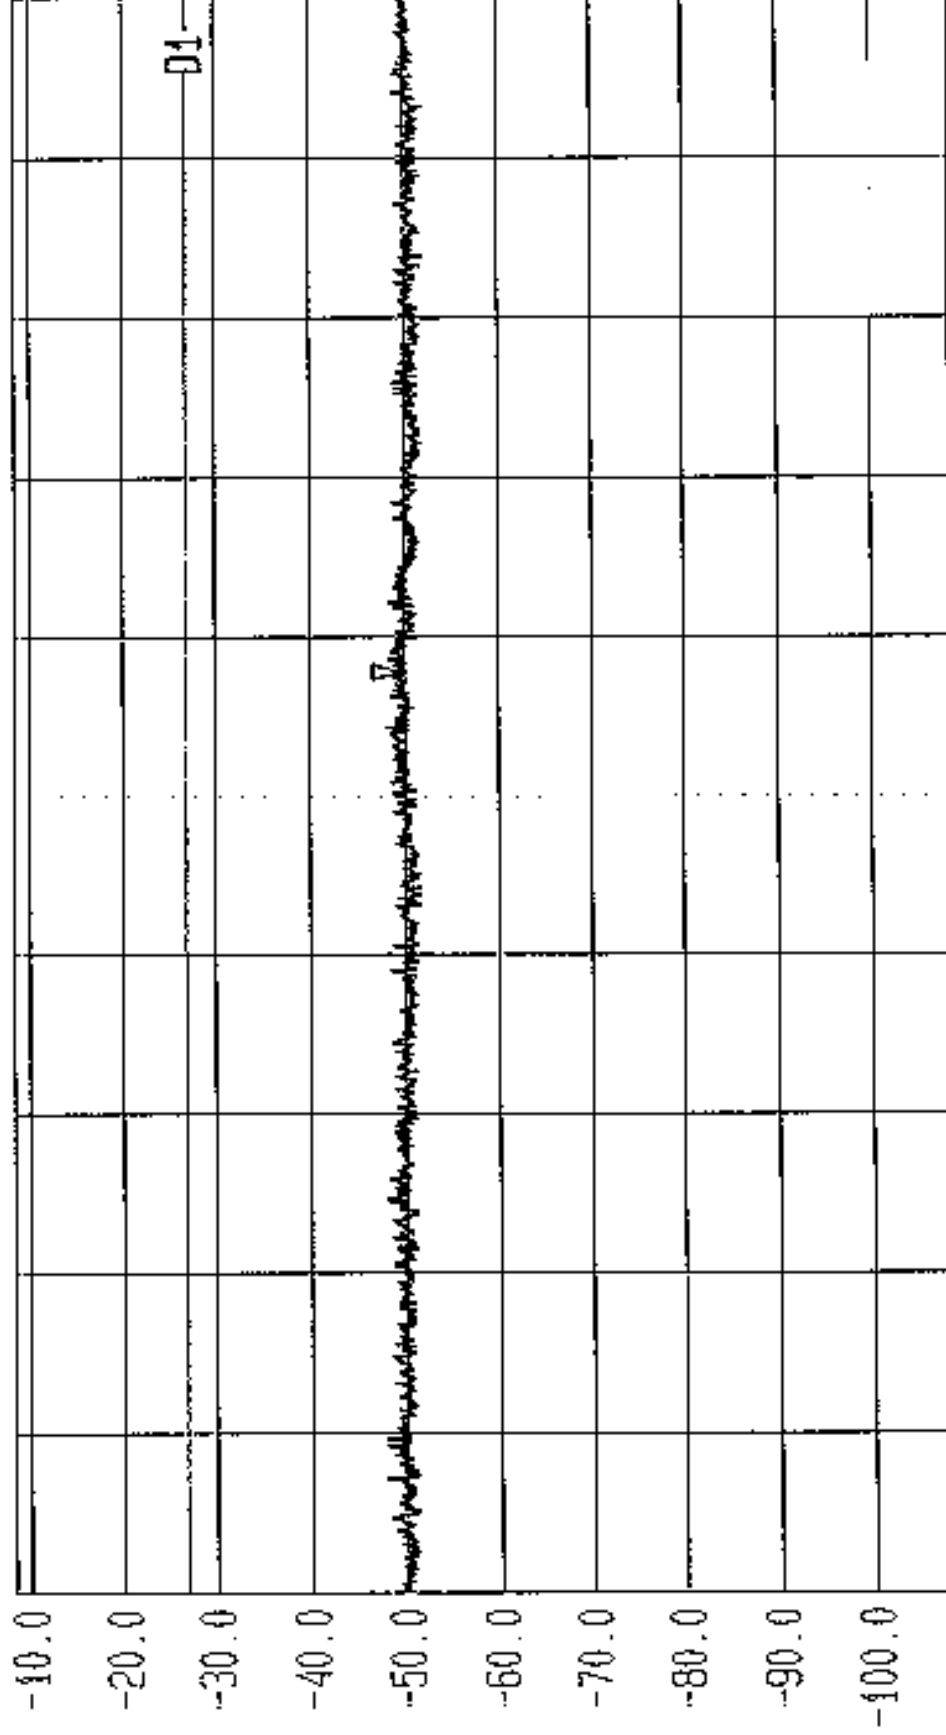Ref.Lvl -8.40 dBm
Marker -107.5 dBm/Hz
3.1577 GHzRes.Bw 1.0 MHz [3dB]
TG.Lvl Off
CF.Stp 200.000 MHz
Vid.Bw 1 MHz
RF.Att 0 dB
Unit [dBm]Start 2 GHz
Span 2 GHz
Center 3 GHz
Sweep 20 ms
Stop 4 GHzRadiated. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit.
Limit. 01: -27dBm. FCC Part 15.407(b) TX: 5.25-5.356Hz. Top Chan. GPH/38658/J004/149



LVLOFF
Date 30.Mar.'99 Time 08:45:40
Ref.Lvl -8.40 dBm
Marker -108.2 dBm/Hz
2.1422 GHz

Res.BW 1.0 MHz [3dB]
TG.Lvl off
CF.Stp 200.000 MHz
Unit RF.Att 0 dB
Vid.Bw 1 MHz

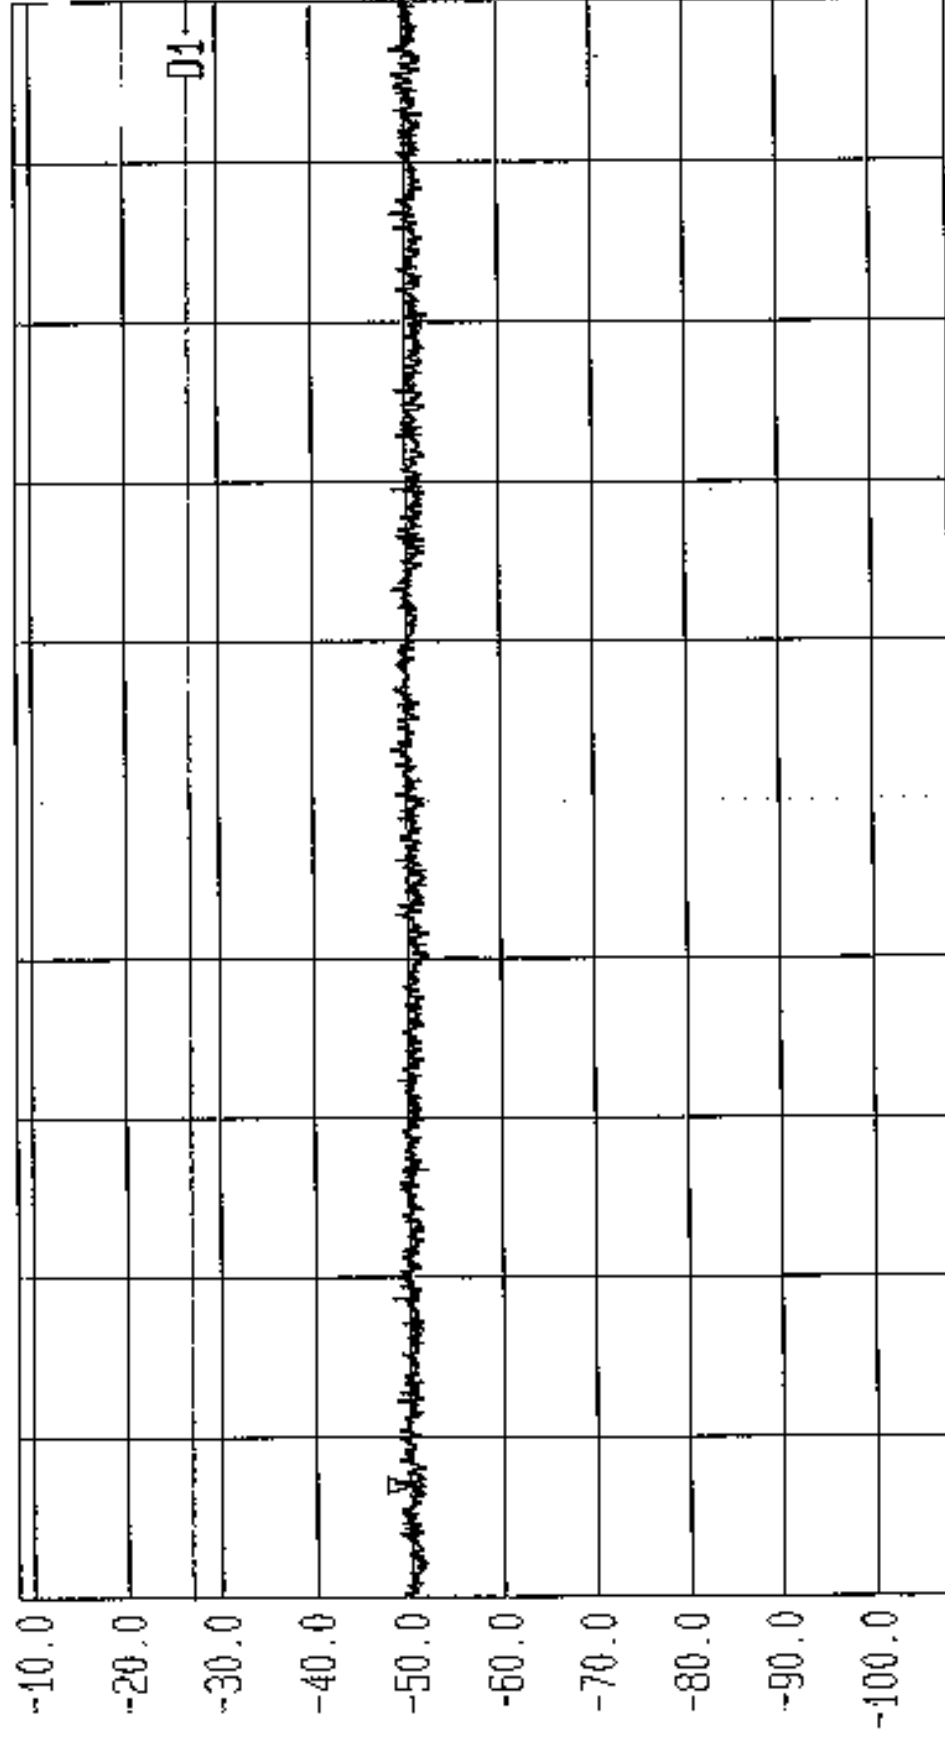


Start 2 GHz
Span 2 GHz
Center 3 GHz
Sweep 20 ms
Stop 4 GHz

Radiated, Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit.
Limit. D1: -27dBm. FCC Part 15.407 (b) TX: 5.725-5.825GHz. Bot Chan. GPH/38658/JD04/150



LVLOFF


Date 30.Mar.'99 Time 08:54:09

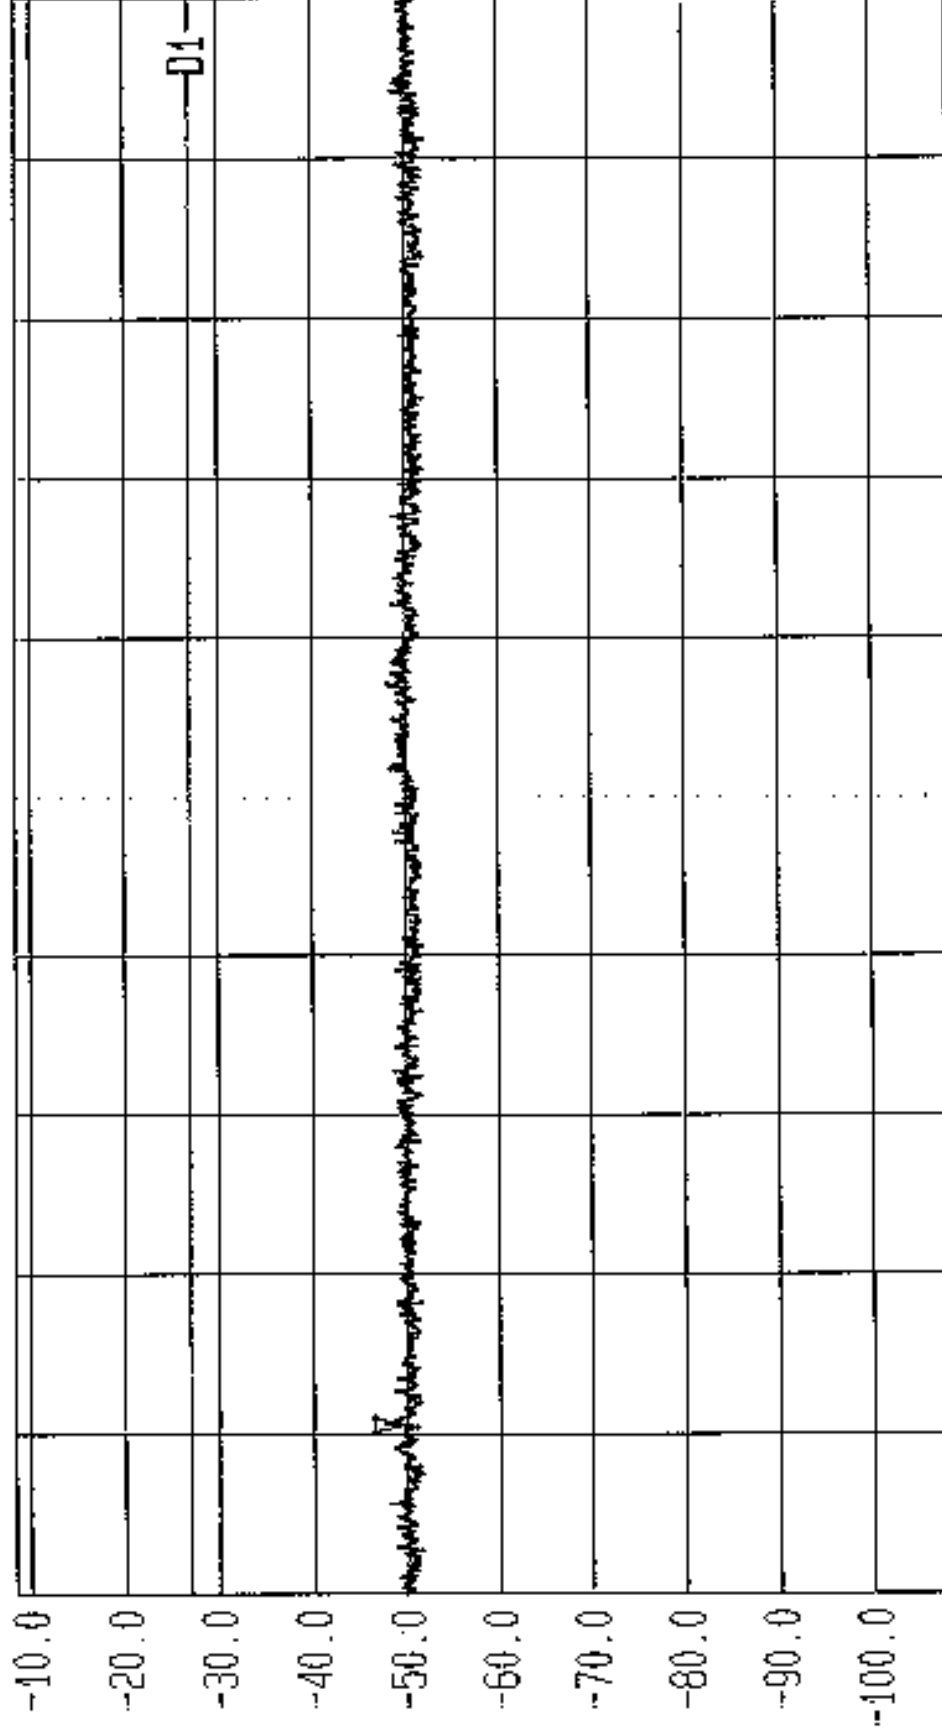Ref.Lvl -8.40 dBm
Marker -107.2 dBm/Hz
2.2133 GHzRes.Bw 1.0 MHz [3dB]
T6.Lvl off
CF.Stp 200.000 MHz
Vid.Bw 1 MHz
RF.Att 0 dB
Unit [dBm]Start 2 GHz
Span 2 GHz
Center 3 GHz
Sweep 20 ms
Stop 4 GHzRadiated. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit.
Limit. D1: -27dBm. FCC Part 15.407(b) TX: 5.725-5.825GHz. Top Chan. GPH/38658/JD04/151



LVLOFF
Date 30.Mar.'99 Time 09:02:17
Ref.Lvl -8.90 dBm
Marker -107.5 dBm/Hz
1.9900 GHz

Res.Bw 1.0 MHz [3dB]
TG.Lvl Off
CF.Stp 100.000 MHz
Vid.Bw 1 MHz
RF.Atc 0 dB
Unit [dBm]

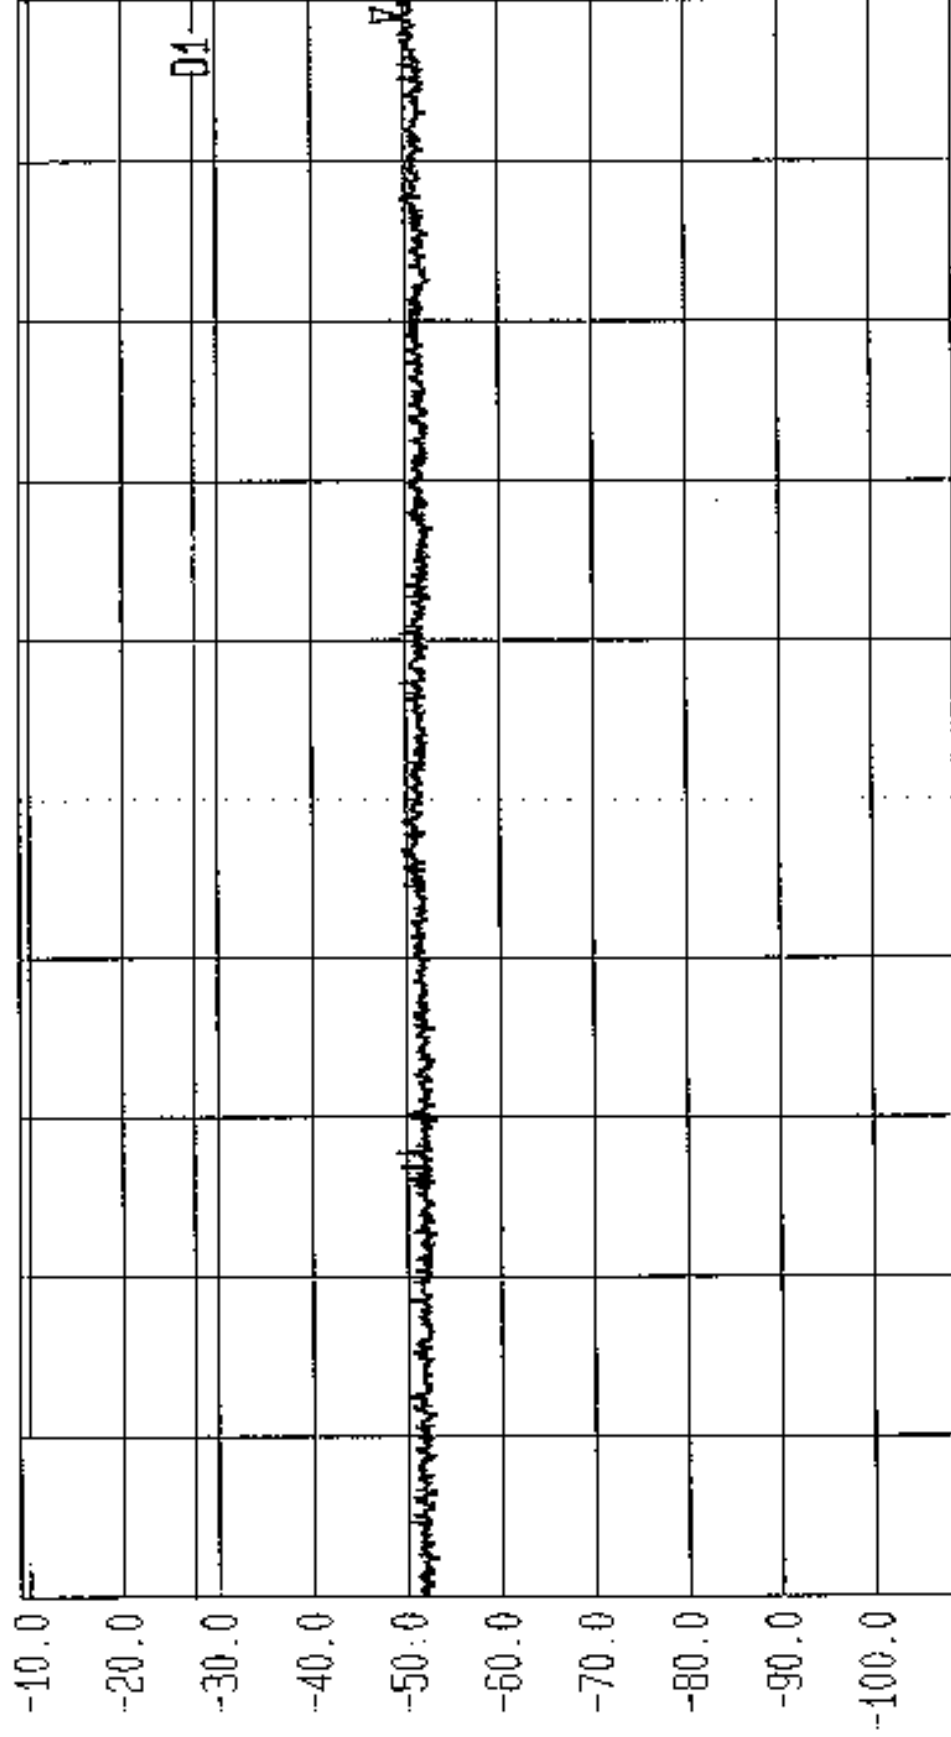

Start 1 GHz
Span 1 GHz
Center 1.5 GHz
Sweep 20 ms
Stop 2 GHz

Radiated. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit.
Limit. Di: -27dBm. FCC Part 15.407(b) TX: 5.15-5.25GHz. Bot Chan. GPH/38658/JD04/153



LVLOFF

Date 30.Mar.'99 Time 09:07:20

Ref.Lvl -8.90 dBm

Marker -108.1 dBm/Hz

1.2022 GHz

Res.Bw

TG.Lvl

CF.Stp

1.0 MHz [3dB]

Off

100.000 MHz

Vid.Bw


RF.Att

Unit

1 MHz

0 dB


[dBm]

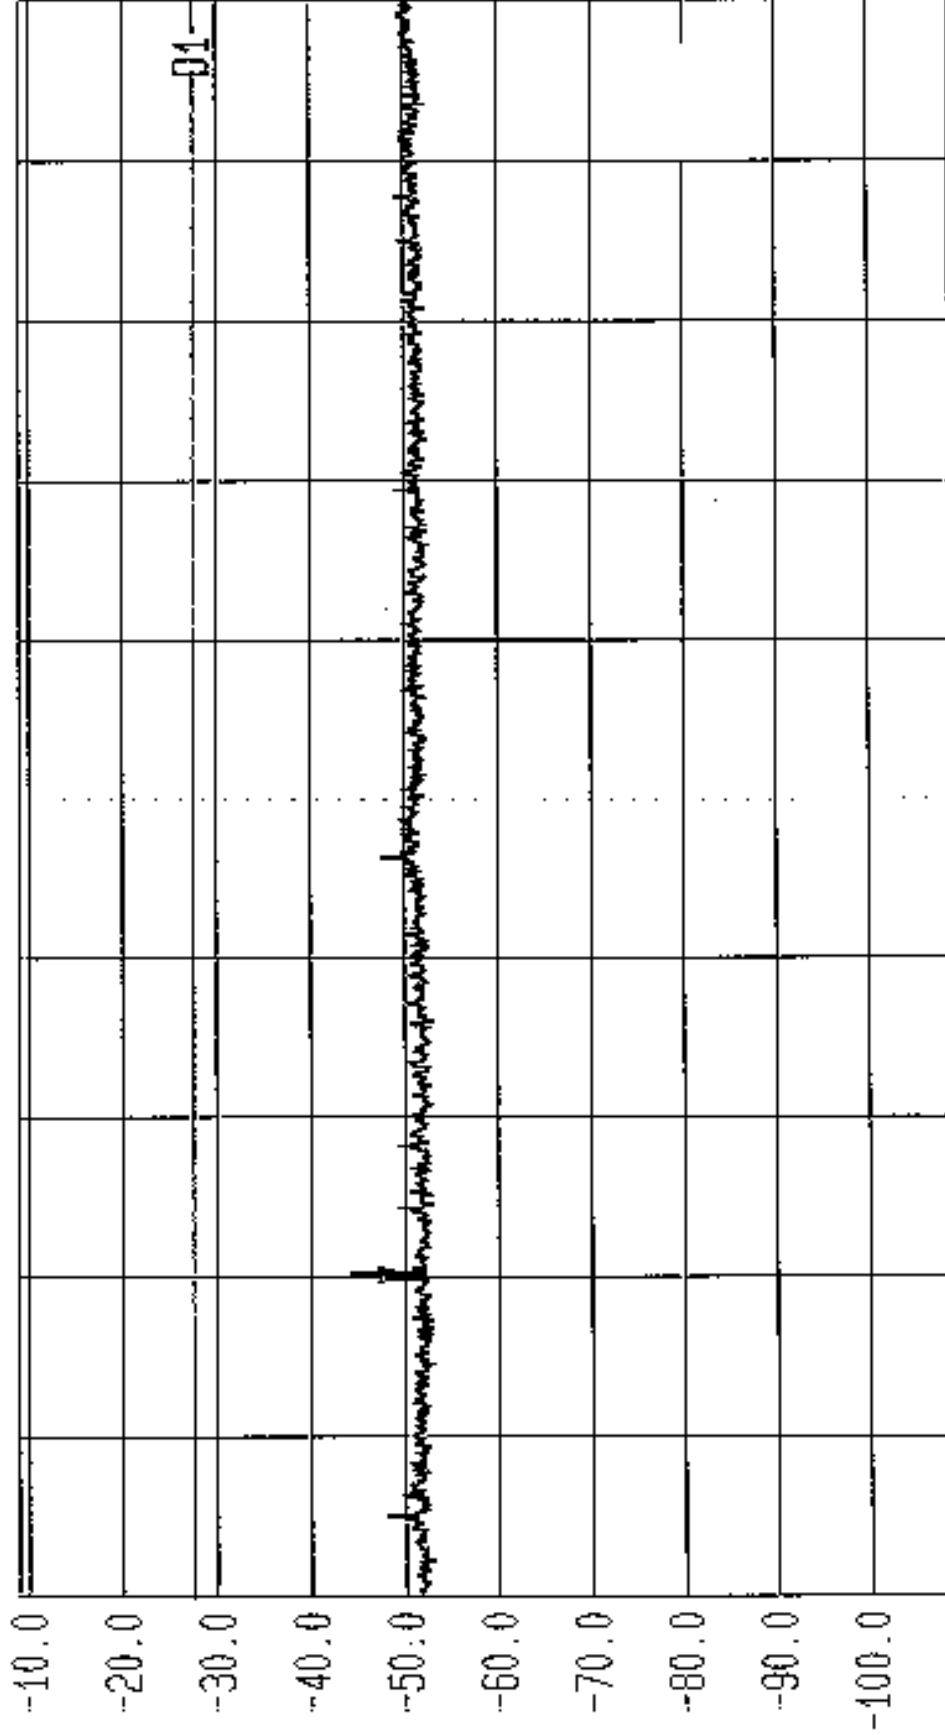Start
1 GHzSpan
1 GHzCenter
1.5 GHzSweep
20 msStop
2 GHz

Radiated. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit.
Limit. Dt: -27dBm. FCC Part 15.407(b) TX: 5.15-5.25GHz. Top Chan. GPH/38658/JD04/154




LVLOFF
Date 30.Mar.'99 Time 09:12:27
Ref.Lvl -8.90 dBm
Marker -109.0 dBm/Hz
1.0900 GHz
Res.Bw 1.0 MHz [3dB]
TG.Lvl Off
CF.Stp 100.000 MHz
Vid.Bw 1 MHz
RF.Att 0 dB
Unit [dBm]

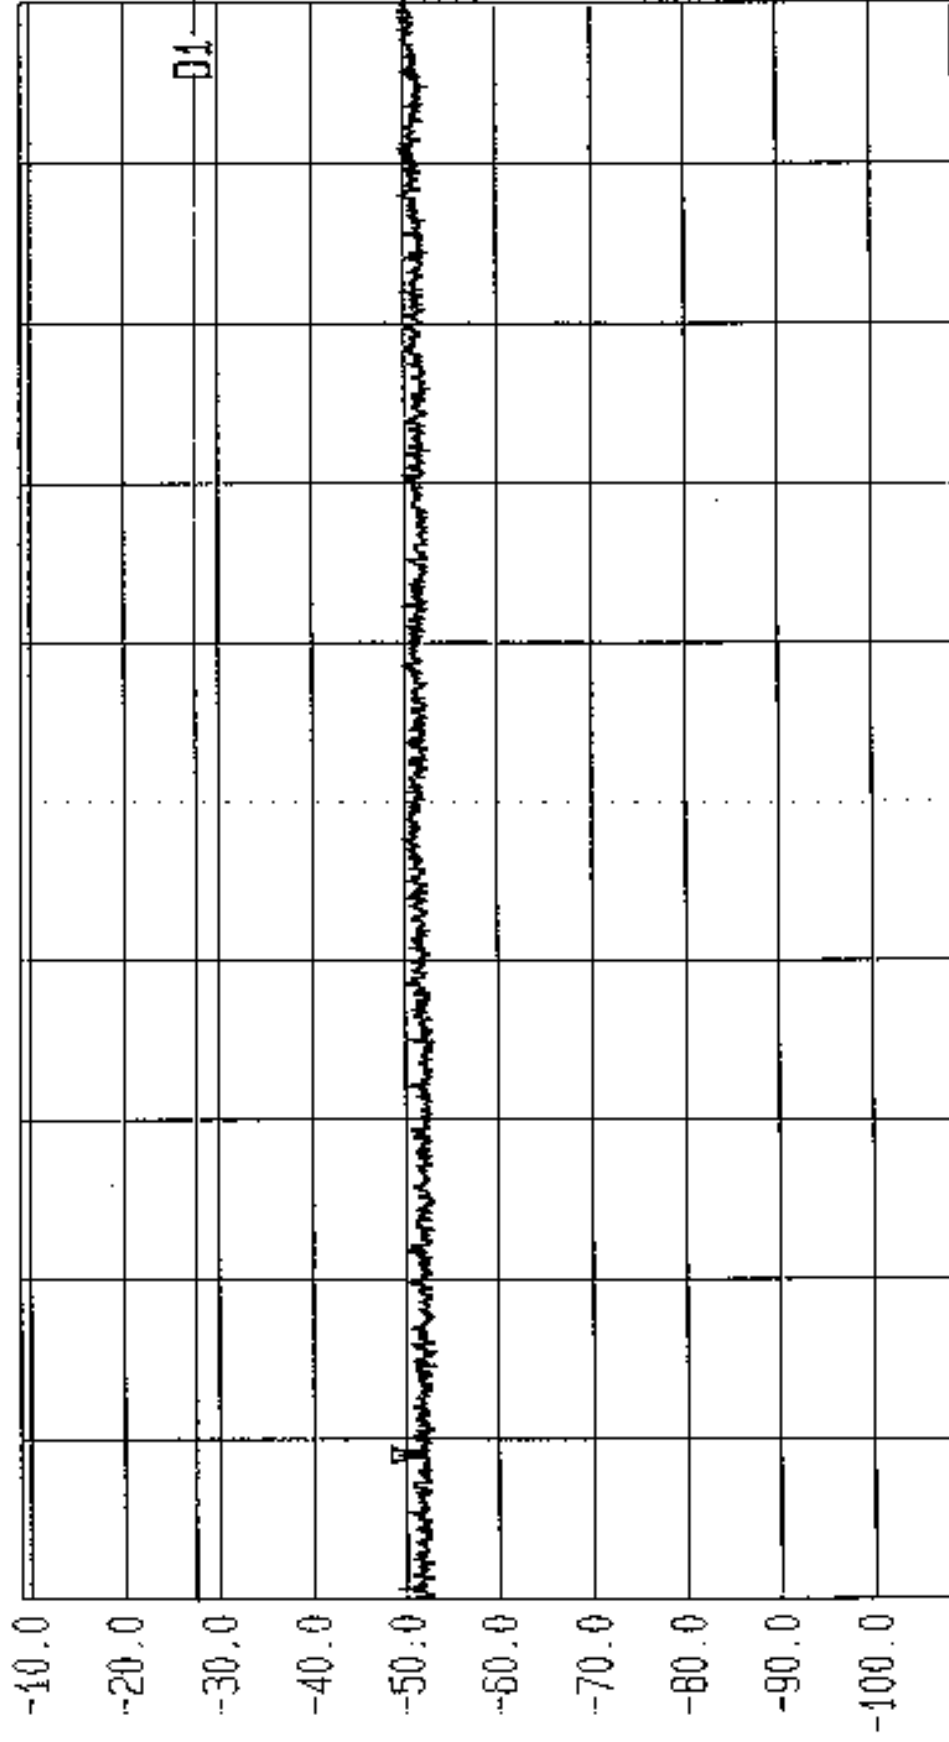

Start 1 GHz
Span 1 GHz
Center 1.5 GHz
Sweep 20 ms
Stop 2 GHz
Radiated. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit.
Limit. D1: -27dBm. FCC Part 15.407(b) TX: 5.25-5.35GHz. Bot Chan. GPH/38658/J004/155




LVLOFF
Date 30.Mar.'99 Time 09:18:27
Ref.Lvl -8.90 dBm
Marker -109.8 dBm/Hz
1.1688 GHz
Res.Bw 1.0 MHz [3dB]
T6.Lvl Off
CF.Stp 100.000 MHz
Vid.Bw 1 MHz
RF.Att 0 dB
Unit [dBm]

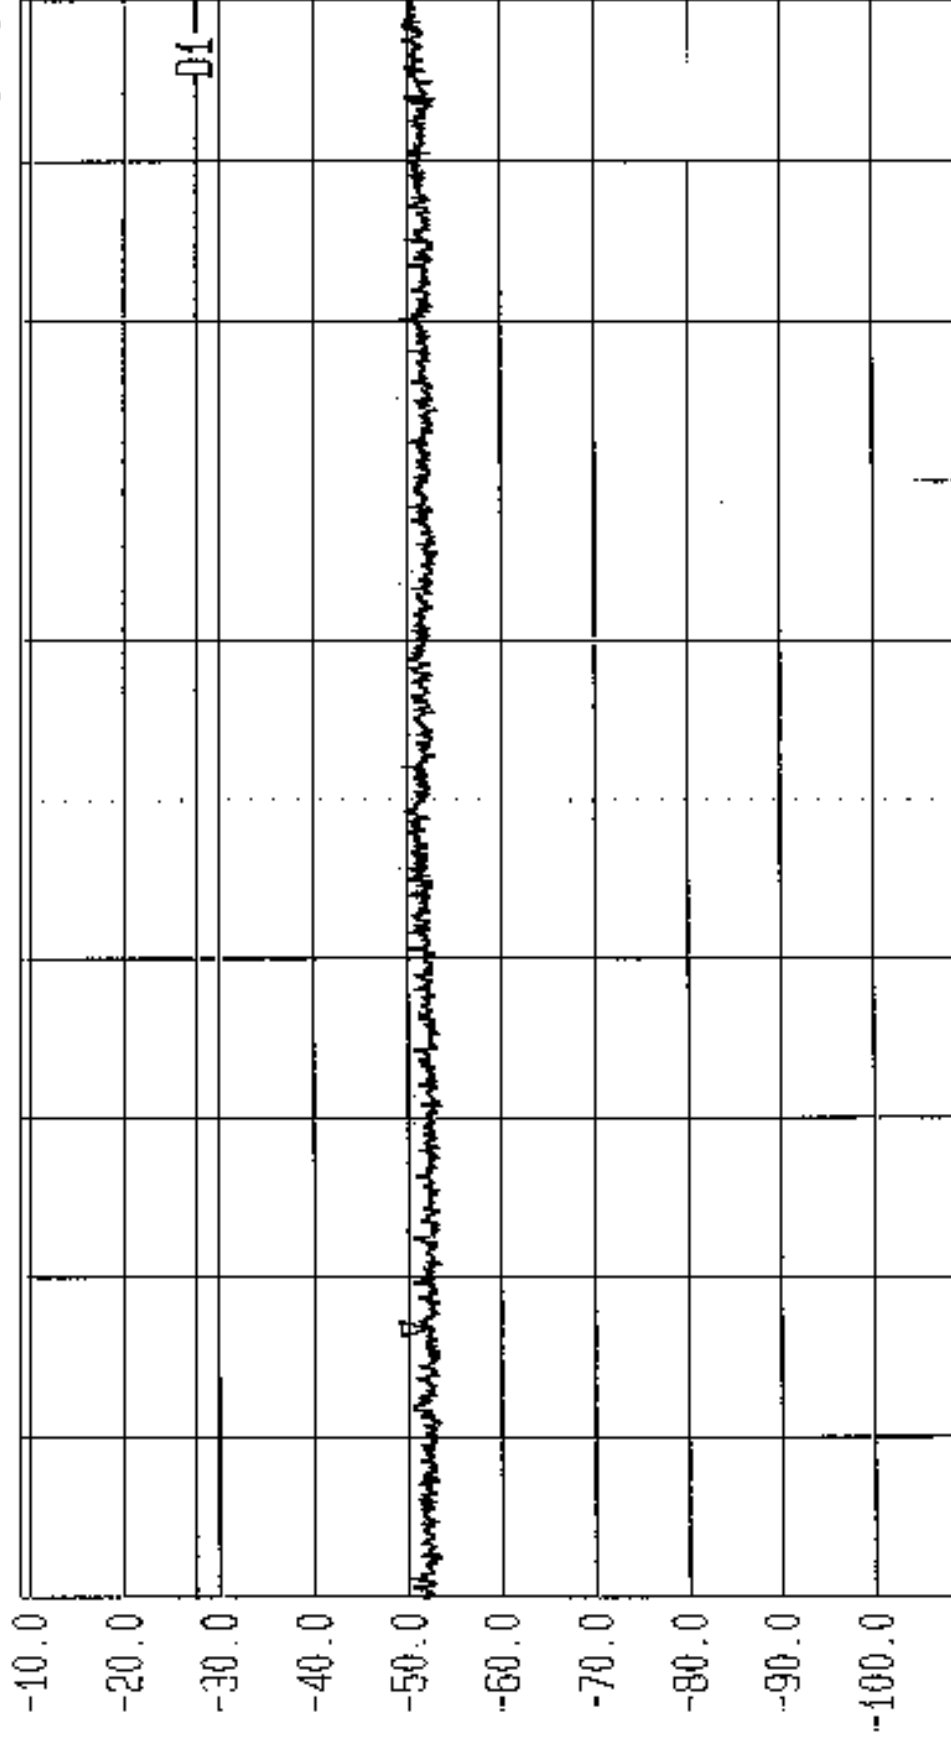

Start 1 GHz
Span 1 GHz
Center 1.5 GHz
Sweep 20 ms
Stop 2 GHz
Radiated, Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit.
Limit. Di: -27dBm. FCC Part 15.407(b) TX: 5.25-5.35GHz. Top Chan. GPH/38658/JD04/156



LVL OFF
Date 30.Mar.'99 Time 09:23:42
Ref.Lvl -8.90 dBm
Marker -108.1 dBm/Hz
1.4844 GHz
Res.Bw 1.0 MHz [3dB]
IG.Lvl off
CF.Stp 100.000 MHz
RF.Att 0 dB
Unit [dBm]
Vid.Bw 1 MHz

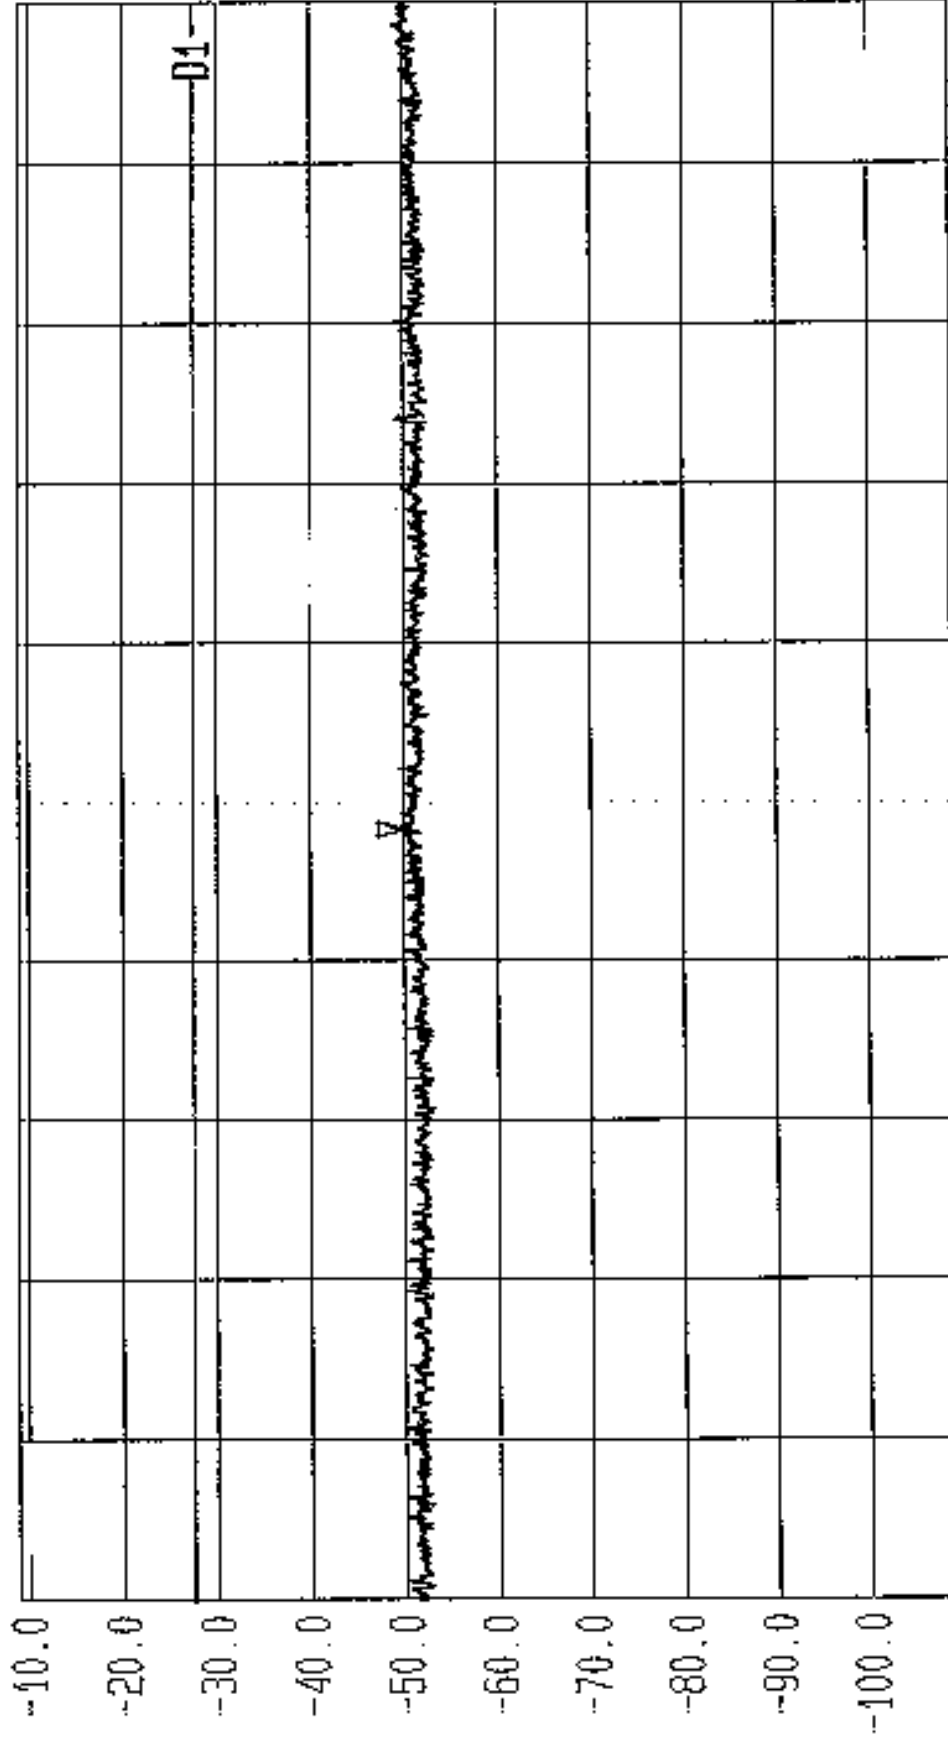


Start 1 GHz
Span 1 GHz
Center 1.5 GHz
Sweep 20 ms
Stop 2 GHz

Radiated. Tested by AFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit.
Limit. D1: -27dBm. FCC Part 15.407(b) TX: 5.725-5.825GHz. Bot Chan. 6PH/38658/J004/157



LVLOFF
Date 30.Mar.'99 Time 09:28:47
Ref.Lvl -8.90 dBm
Marker -107.9 dBm/Hz
1.9877 GHz
Res.BW 1.0 MHz (3dB)
TQ.Lvl off
CF.Stp 100.000 MHz
Unit
Vi0.BW 1 MHz
RF.Att 0 dB
(dBm)

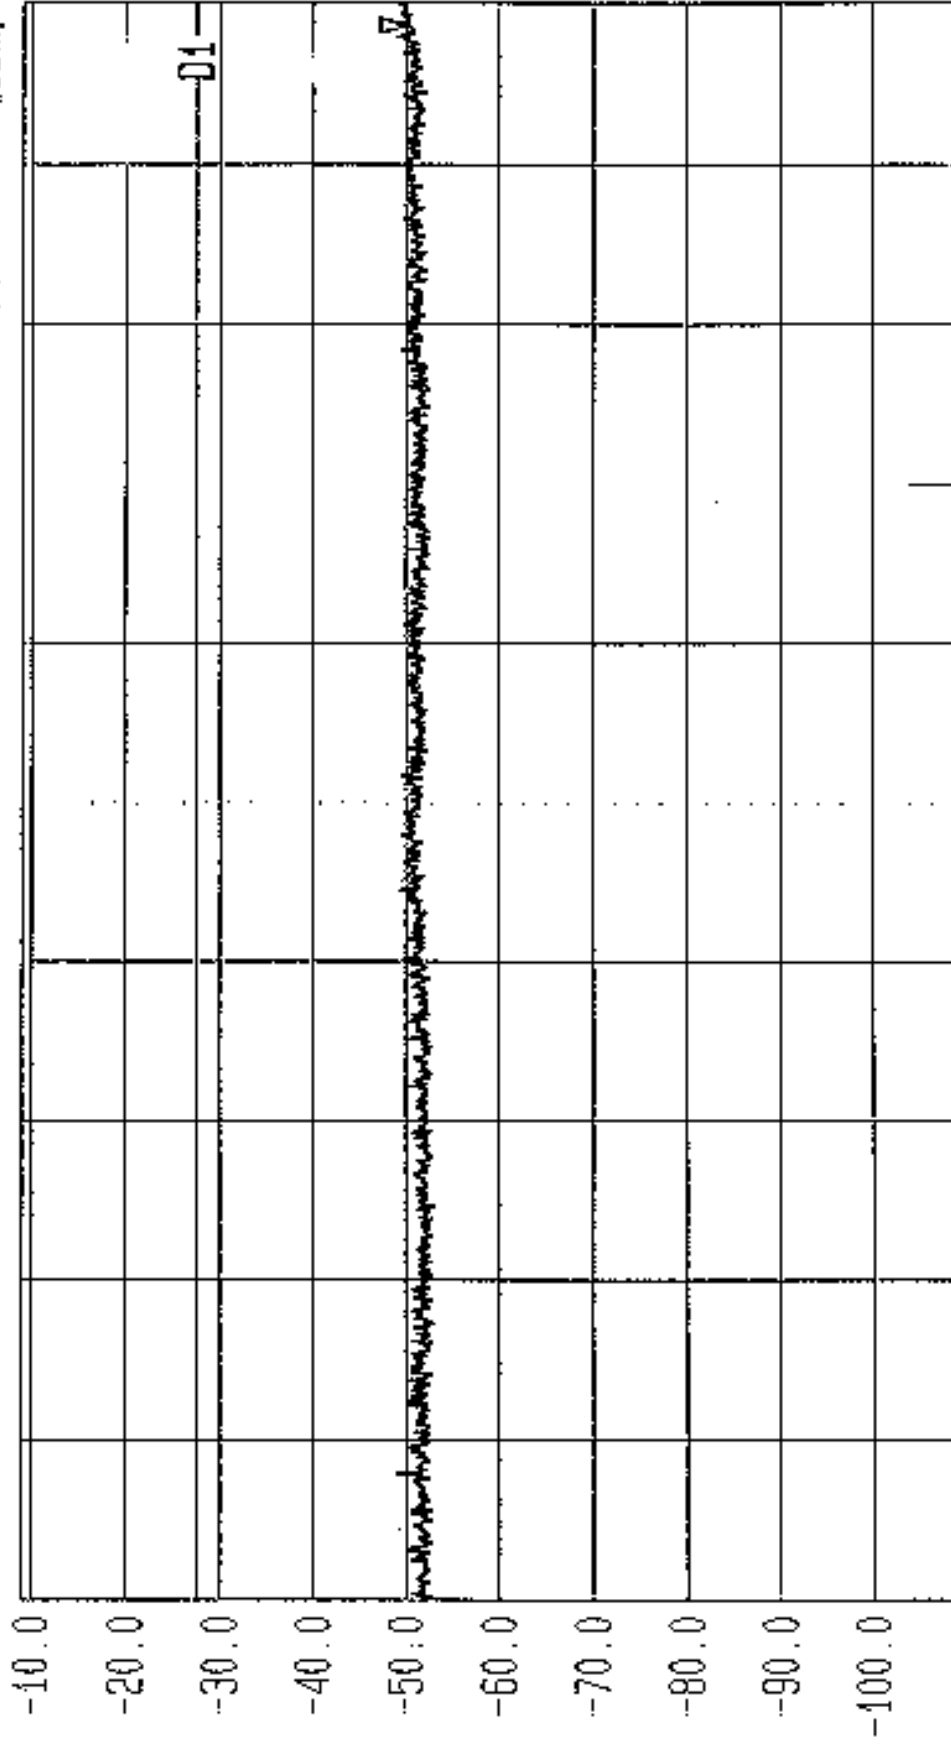


Start 1 GHz
Span 1 GHz
Center 1.5 GHz
Sweep 20 ms
Stop 2 GHz
Radiated. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit.
Limit. D1: -27dBm. FCC Part 15.407 (b) TX: 5.725-5.825GHz. Top Chan. 6PH/38658/JD04/158



Date 30.Mar.'99 Time 11:32:27
Ref.Lvl 70.00 dBuV
Marker 47.30 dBuV
936.2 kHz

Res.Bw 9 kHz [imp]
T6.Lvl off
CF.Stp 2.955 MHz
Vid.Bw 10 kHz
RF.Att 10 dB
Unit [dBuV]

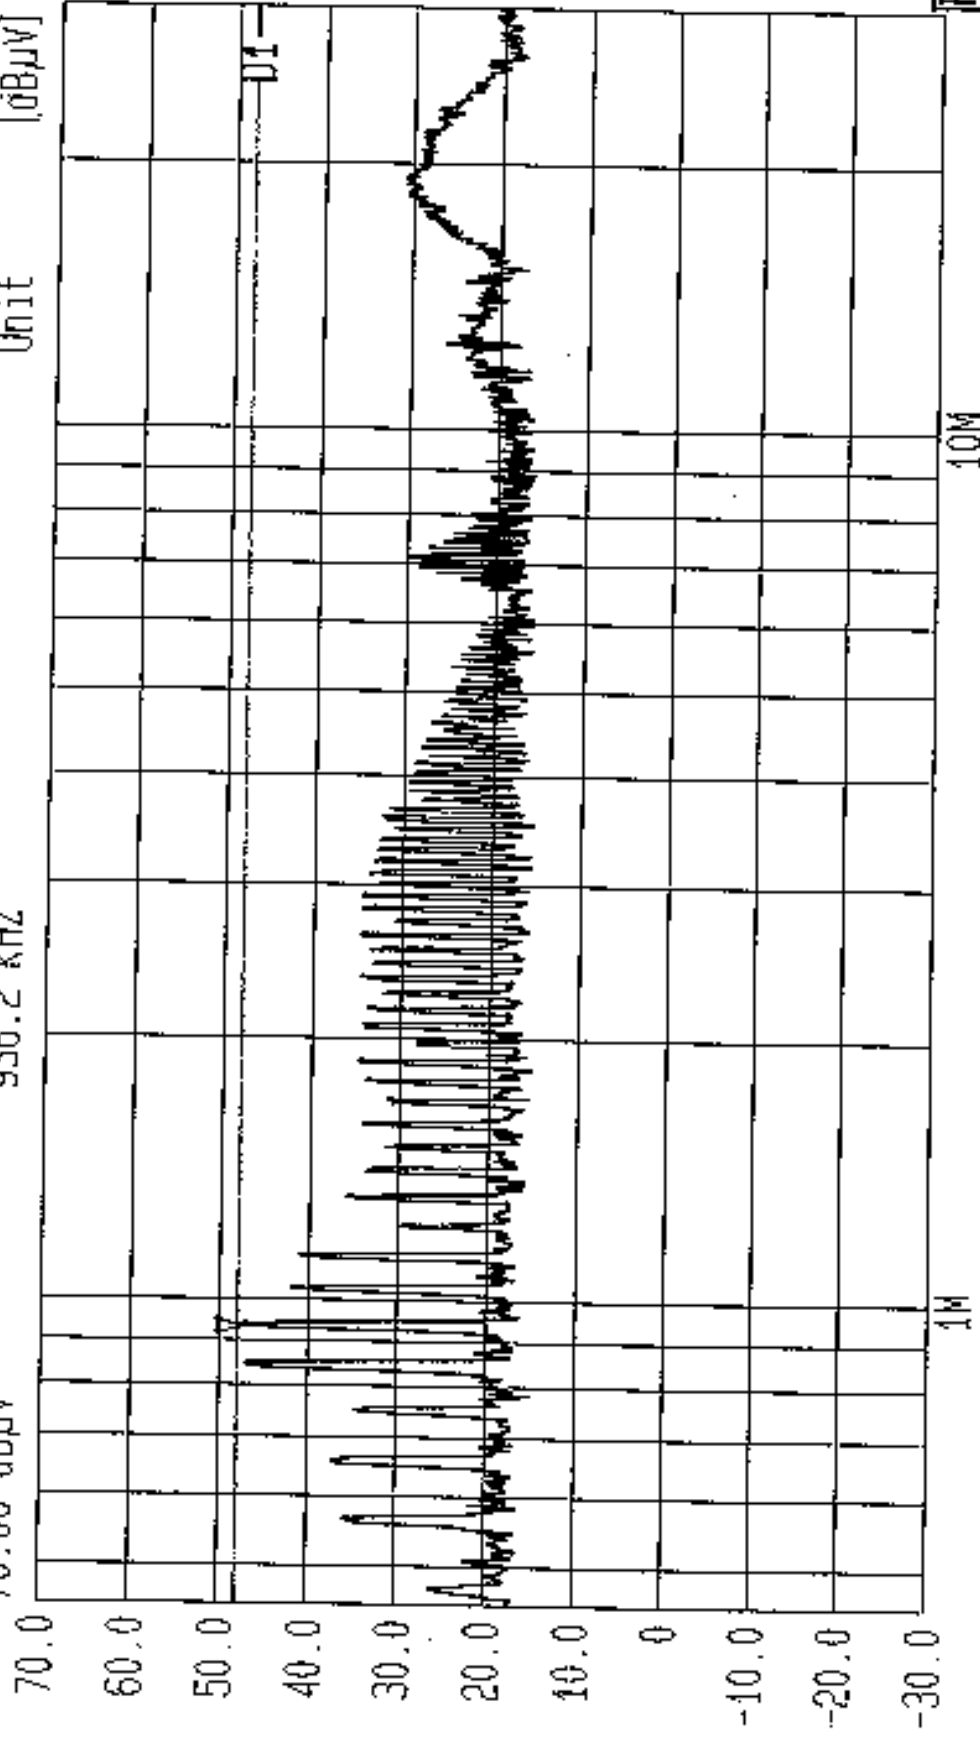

Start 450 kHz
Span 29.55 MHz
Center 3.67423 MHz
Sweep 2.2 s
Stop 30 MHz

Conducted, Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit
Limit: FCC Part 15.407 (b (5)) . Rx: 5.25-5.35MHz. Bot Chan. Neutral GHz/38658/JD04/159



Date 30.Mar.'99 Time 11:38:46

Ref.Lvl 70.00 dB μ V

Marker 47.25 dB μ V

936.2 kHz

Res.Bw

16.Lvl

CF.Stp

9 kHz [imp]

off

2.955 MHz


Vid.Bw

10 kHz

RF.Att

10 dB

[dB μ V]

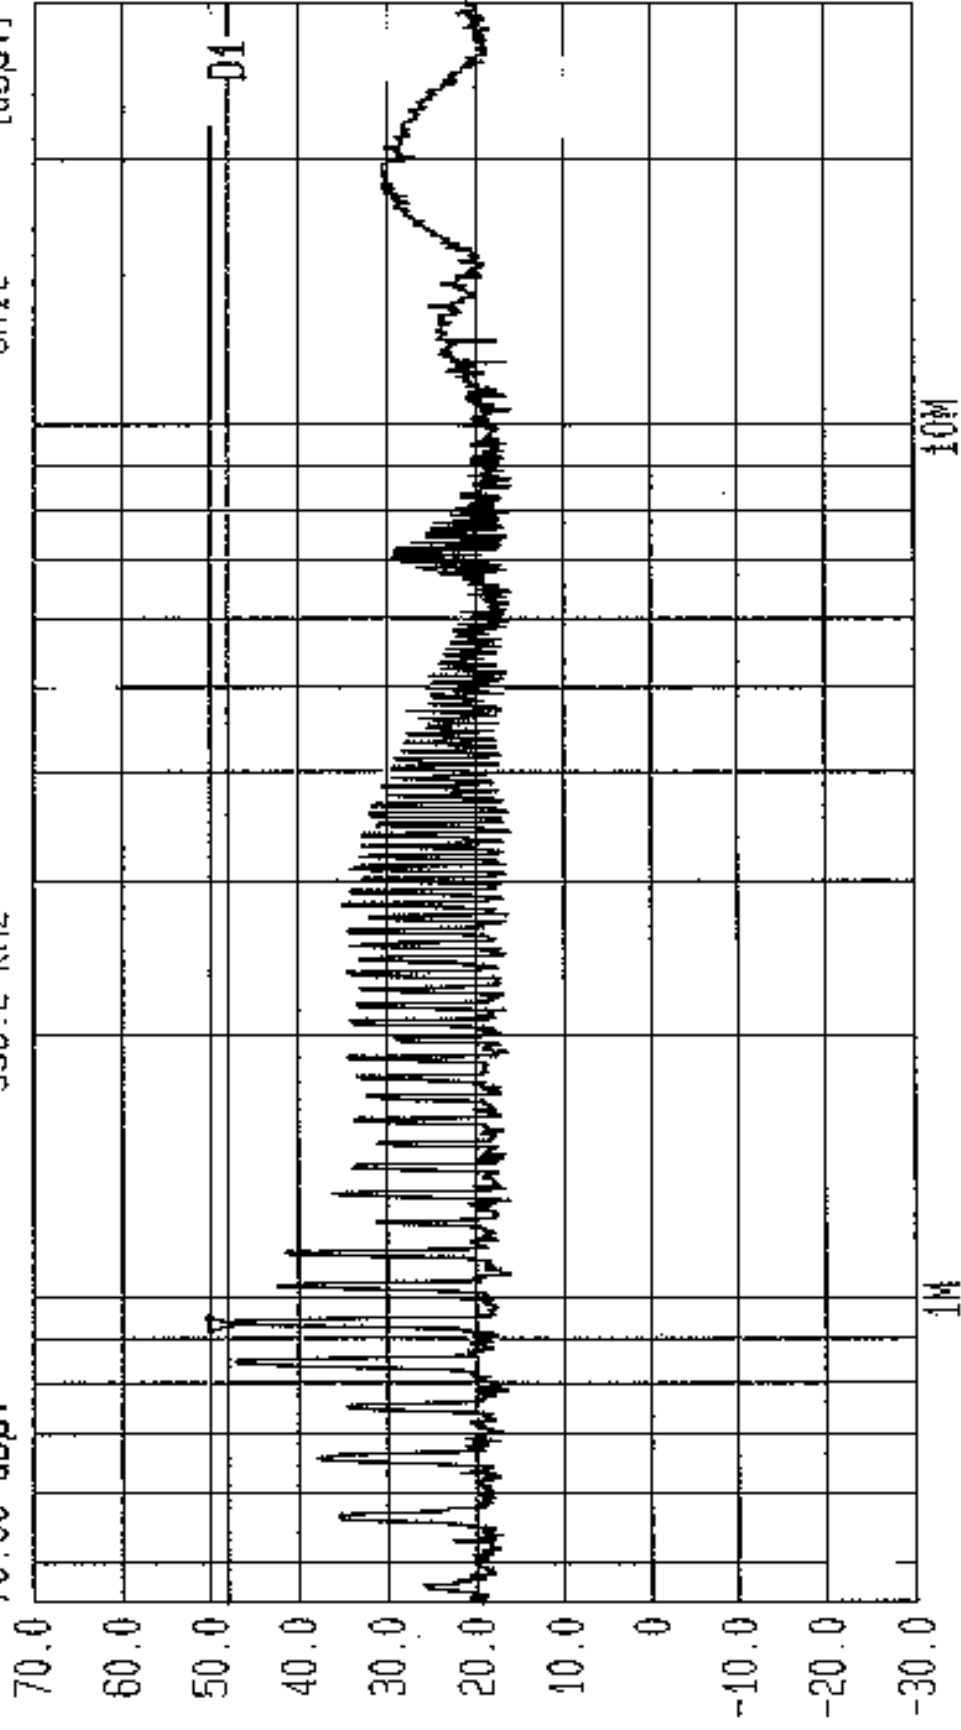

Start 450 kHz

Span 29.55 MHz

Center 3.67423 MHz

Sweep 260 ms

Stop 30 MHz

Conducted. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit
Limit. FCC Part 15.407 (b(5)). Rx. 5.25-5.35GHz. Top Chan. Neutral GPH/38658/JD04/160



Date 30.Mar.'99 Time 11:44:25

Ref.Lvl 70.00 dBuV

Marker 47.20 dBuV

936.2 kHz

Res.Bw

TG.Lvl

CF.Stp

9 kHz [imp]

off

2.955 MHz

Vid.Bw


RF.Att

Unit

10 kHz

10 dB

[dBuV]

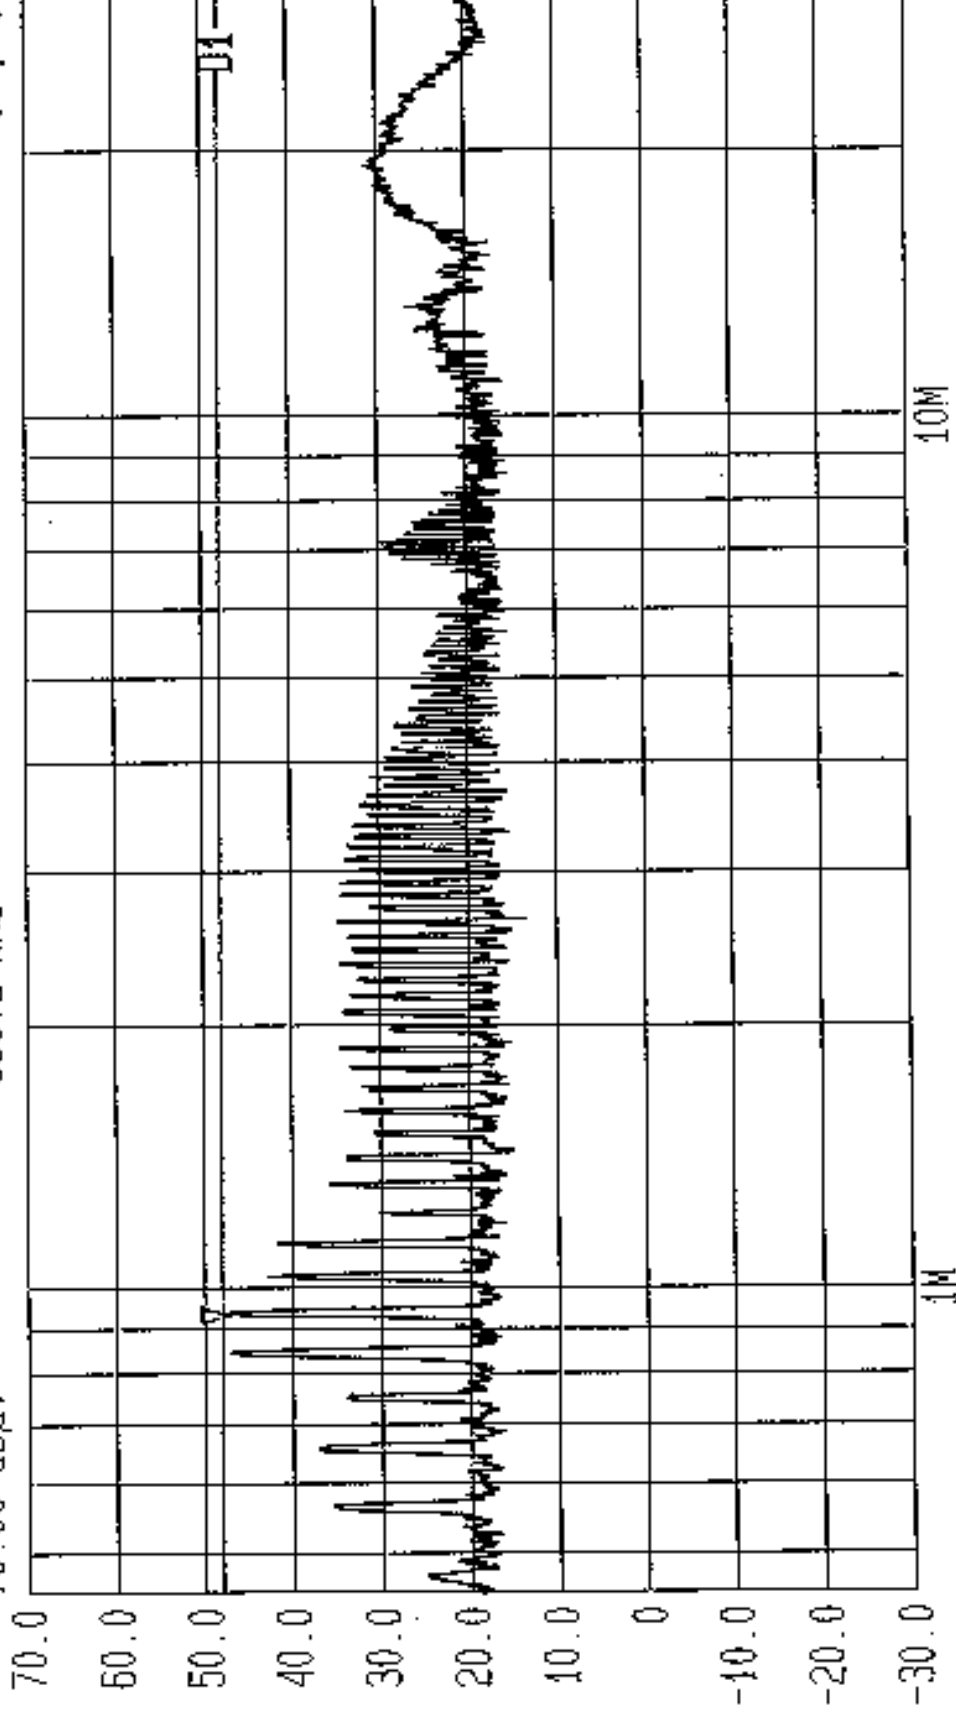

Start 450 kHz Stop 30 MHz

Sweep 2.2 s

Center 3.67423 MHz

Span 29.55 MHz

Conducted. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit
Limit.FCC Part 15.407 (b (5)). Rx 5.725-5.825GHz. Bot Chan. Neutral GPH/38658/JD04/161



Date 30.Mar.'99 Time 11:50:07

Ref.Lvl Marker

70.00 dBμV

48.60 dBμV

936.2 kHz

Res.Bw

TG.Lvl

CF.Stp

9 kHz [imp]

off

2.955 MHz

Vid.Bw


RF.Att

Unit

10 kHz

10 dB

[dBμV]

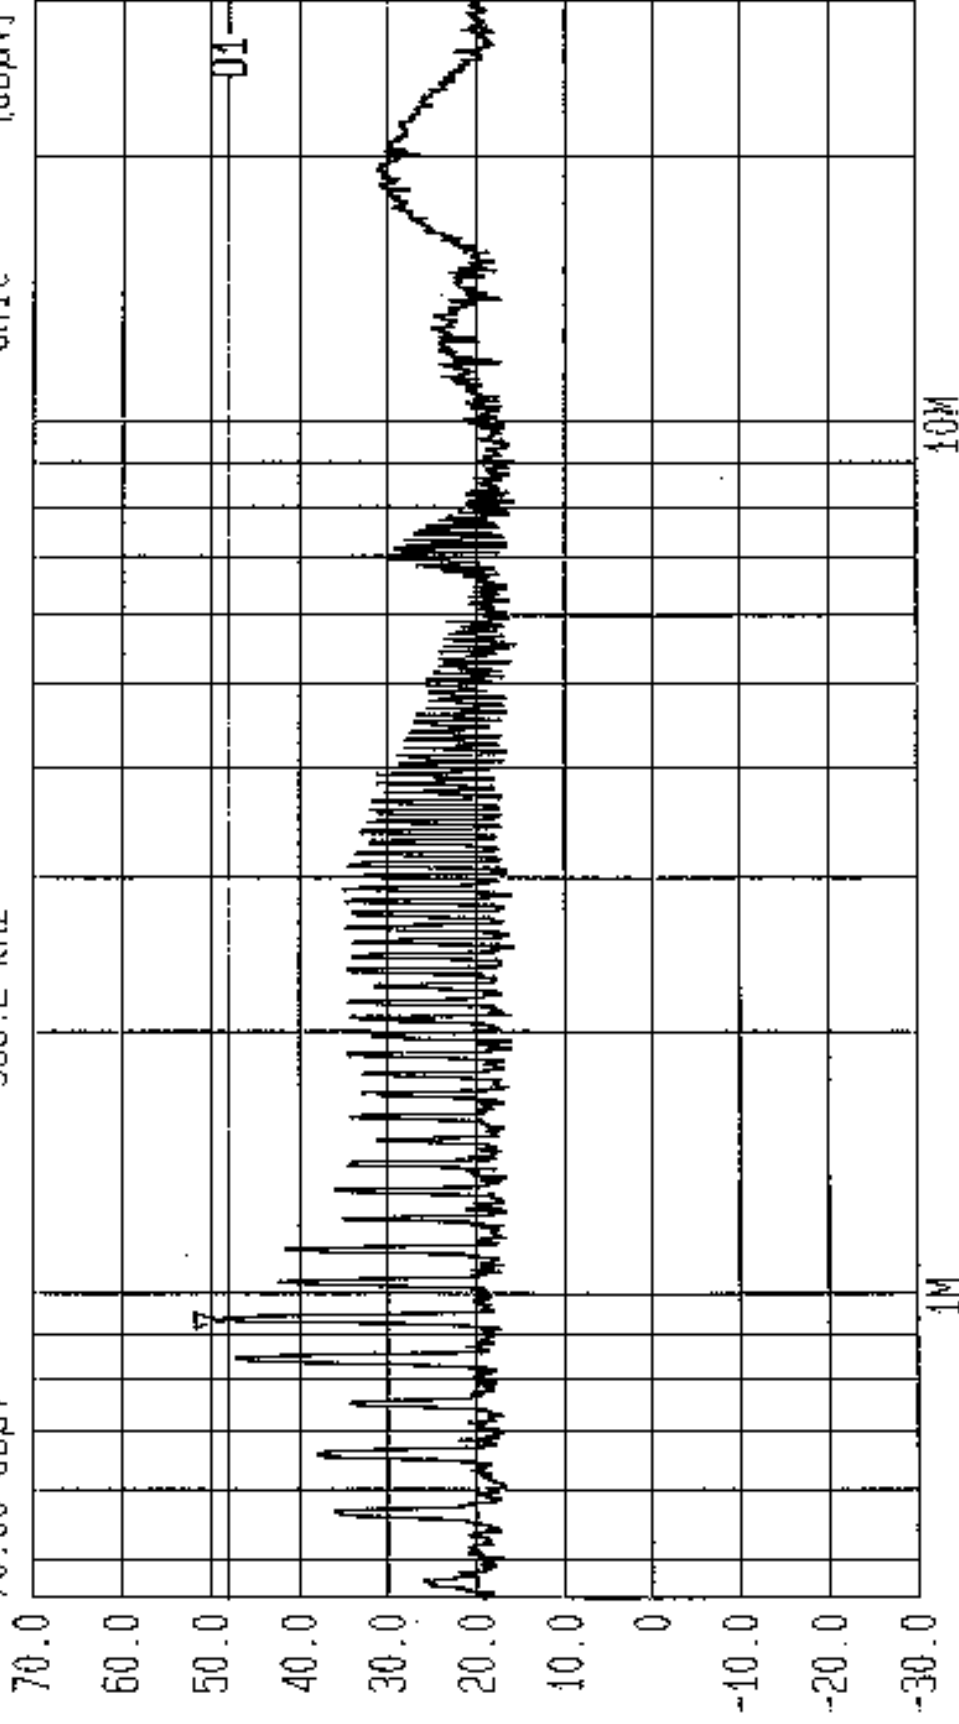

Start

450 kHz

Span

29.55 MHz

Center

3.67423 MHz

Sweep

2.2 s

Stop

30 MHz

Conducted, Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit
Limit.FCC Part 15.407 (b(5)) : RX 5.725-5.825GHz. Top Chan. Neutral GPH/38658/JD04/162



Date 30.Mar.'99 Time 12:08:12

Ref.Lvl Marker

70.00 dBμV

47.43 dBμV

936.2 kHz

Res.BW

TG.Lvl

CF.Stp

9 kHz [imp]

Off

2.955 MHz

Vid.Bw


AF.Att

Unit

10 kHz

10 dB

[dBμV]

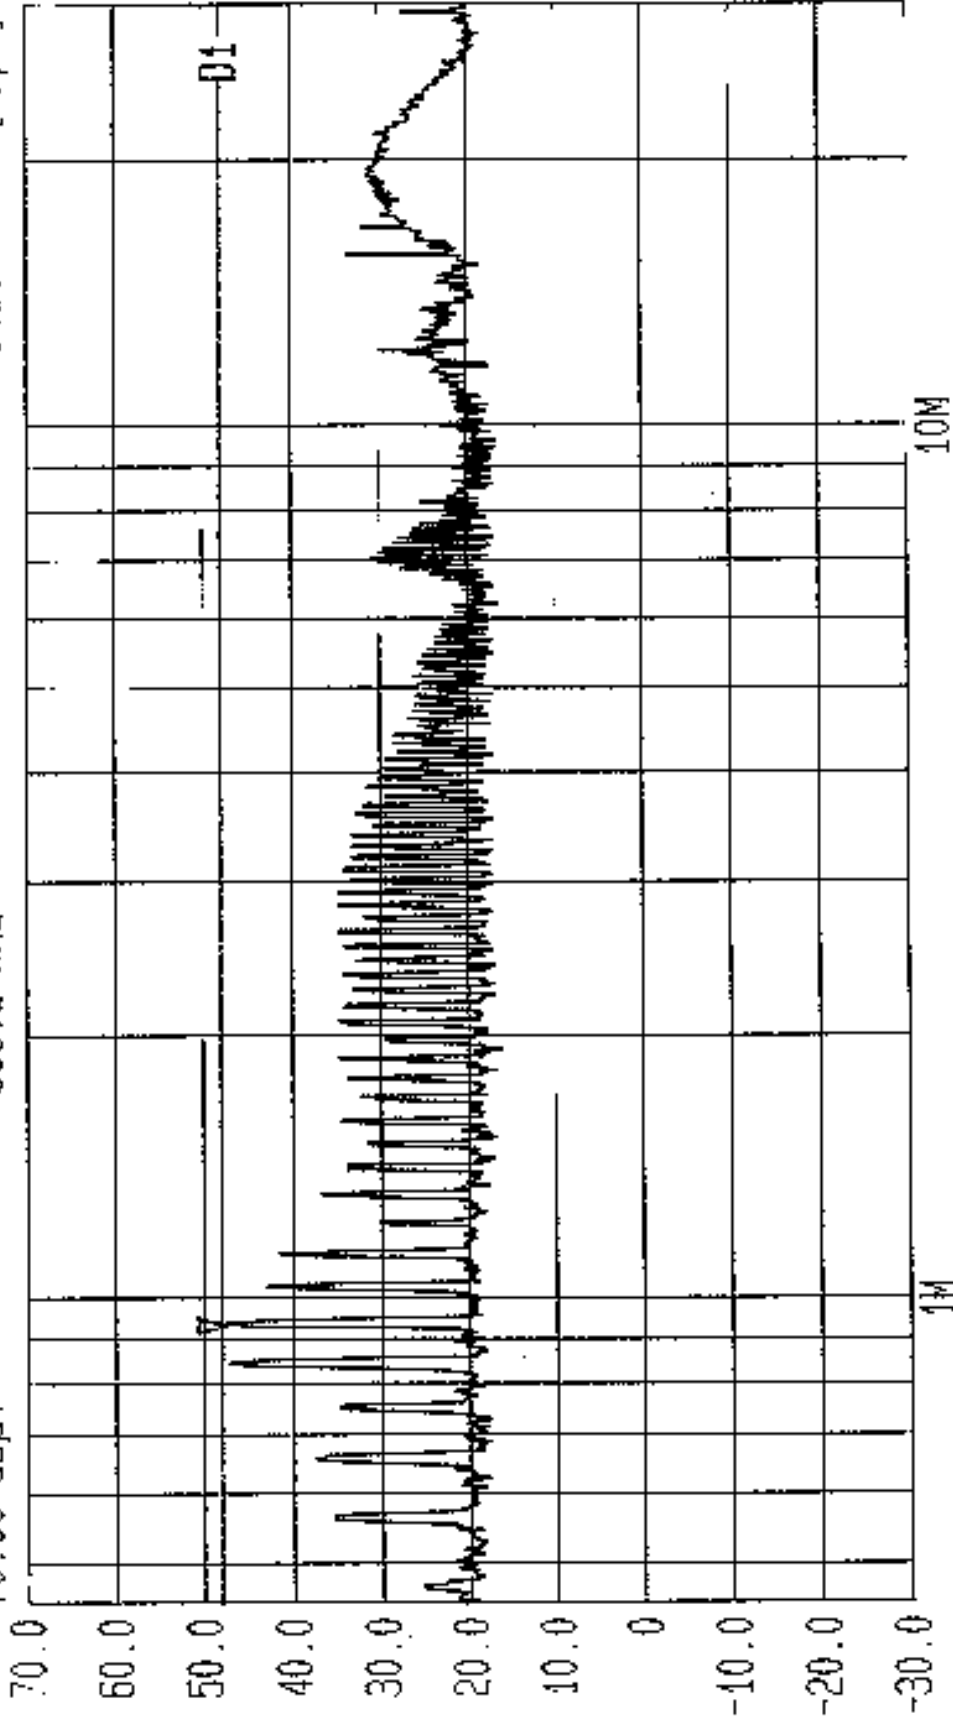

FI

Start 450 kHz Stop 30 MHz
Span 29.55 MHz Sweep 2.2 s
Center 3.67423 MHz
Conducted, Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit
Limit.FCC Part 15.407 (b (5)). Tx 5.15-5.256Hz. Bot Chan. Neutral 6PH/38658/JD04/163



Date 30.Mar.'99 Time 12:14:17

Ref.Lvl Marker

47.38 dBμV

70.00 dBμV

936.2 kHz

Res.Bw

1G.Lvl

CF.Stp

9 kHz [imp]

off

2.955 MHz

Vid.Bw


AF.Att

Unit

10 kHz

10 dB

[dBμV]

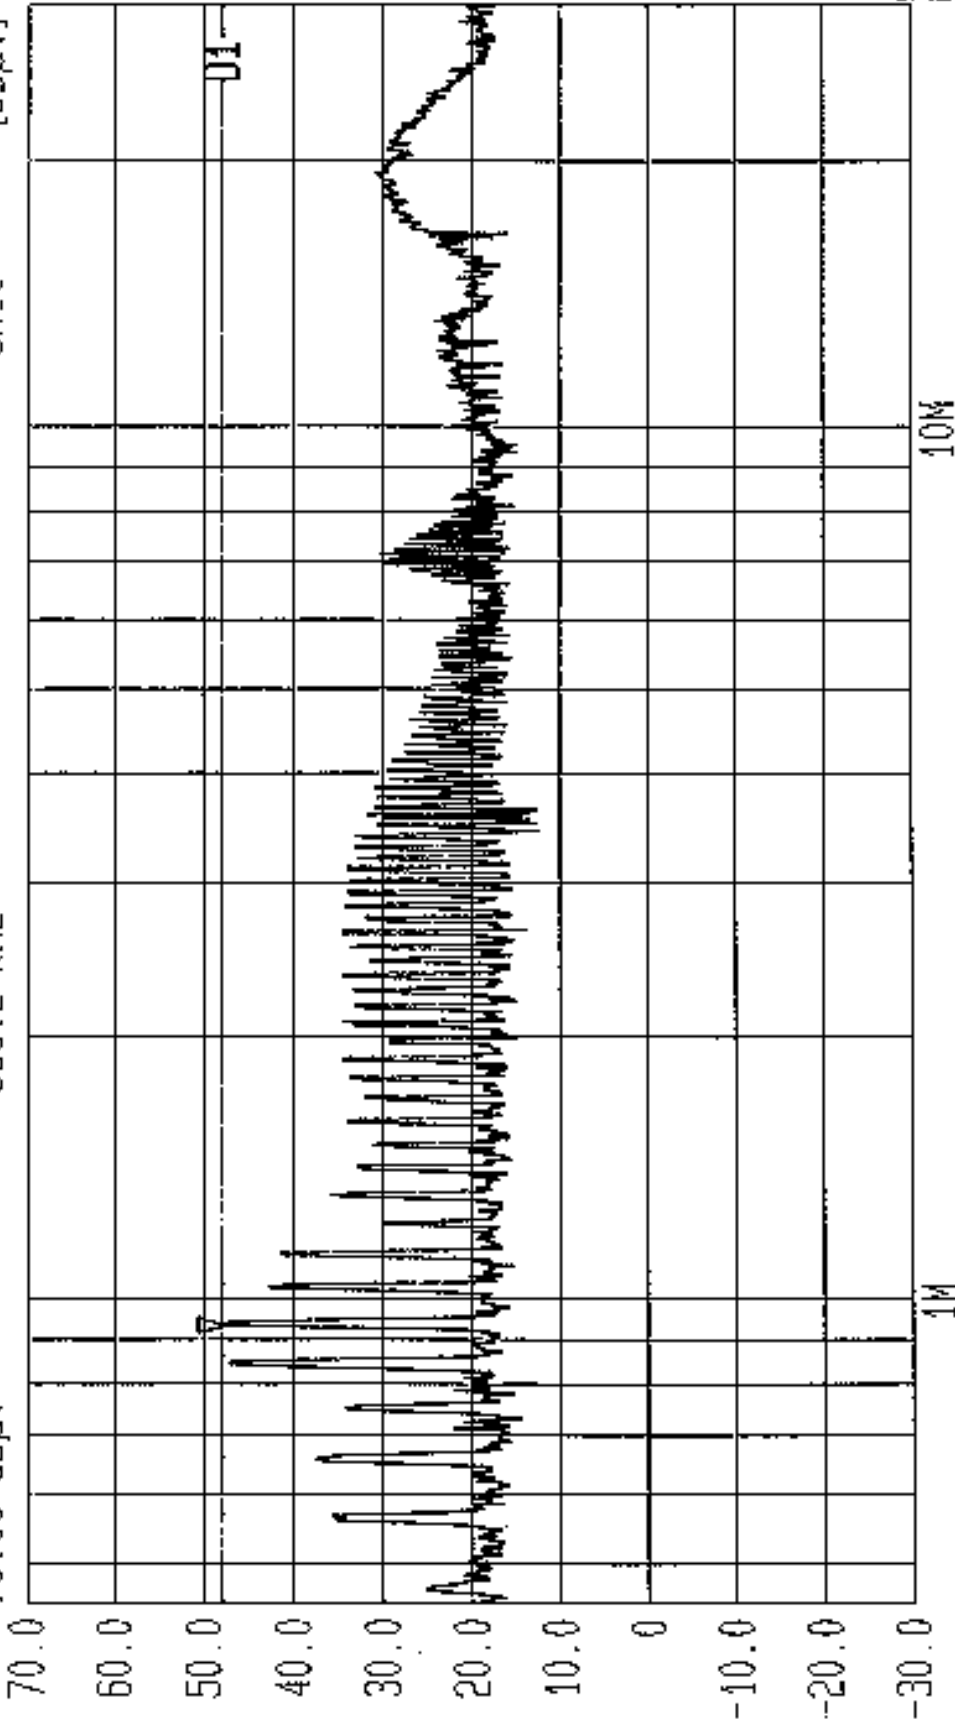

Start

450 kHz

Span

29.55 MHz

Center

3.67423 MHz

Sweep

2.2 s

Stop

30 MHz


Conducted. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit
Limit.FCC Part 15.407 (b (5)). Tx.5.15-5.25GHz. Top Chan. Neutral GPH/38658/JD04/164



Date 30.Mar.'99 Time 12:19:47

Ref.Lvl 70.00 dBuV
Marker 47.86 dBuV
936.2 kHz

Res.Bw 9 kHz [imp]
T6.Lvl Off
CF.Stp 2.955 MHz
Vid.Bw 10 kHz
RF.Att 10 dB
Unit [dBuV]

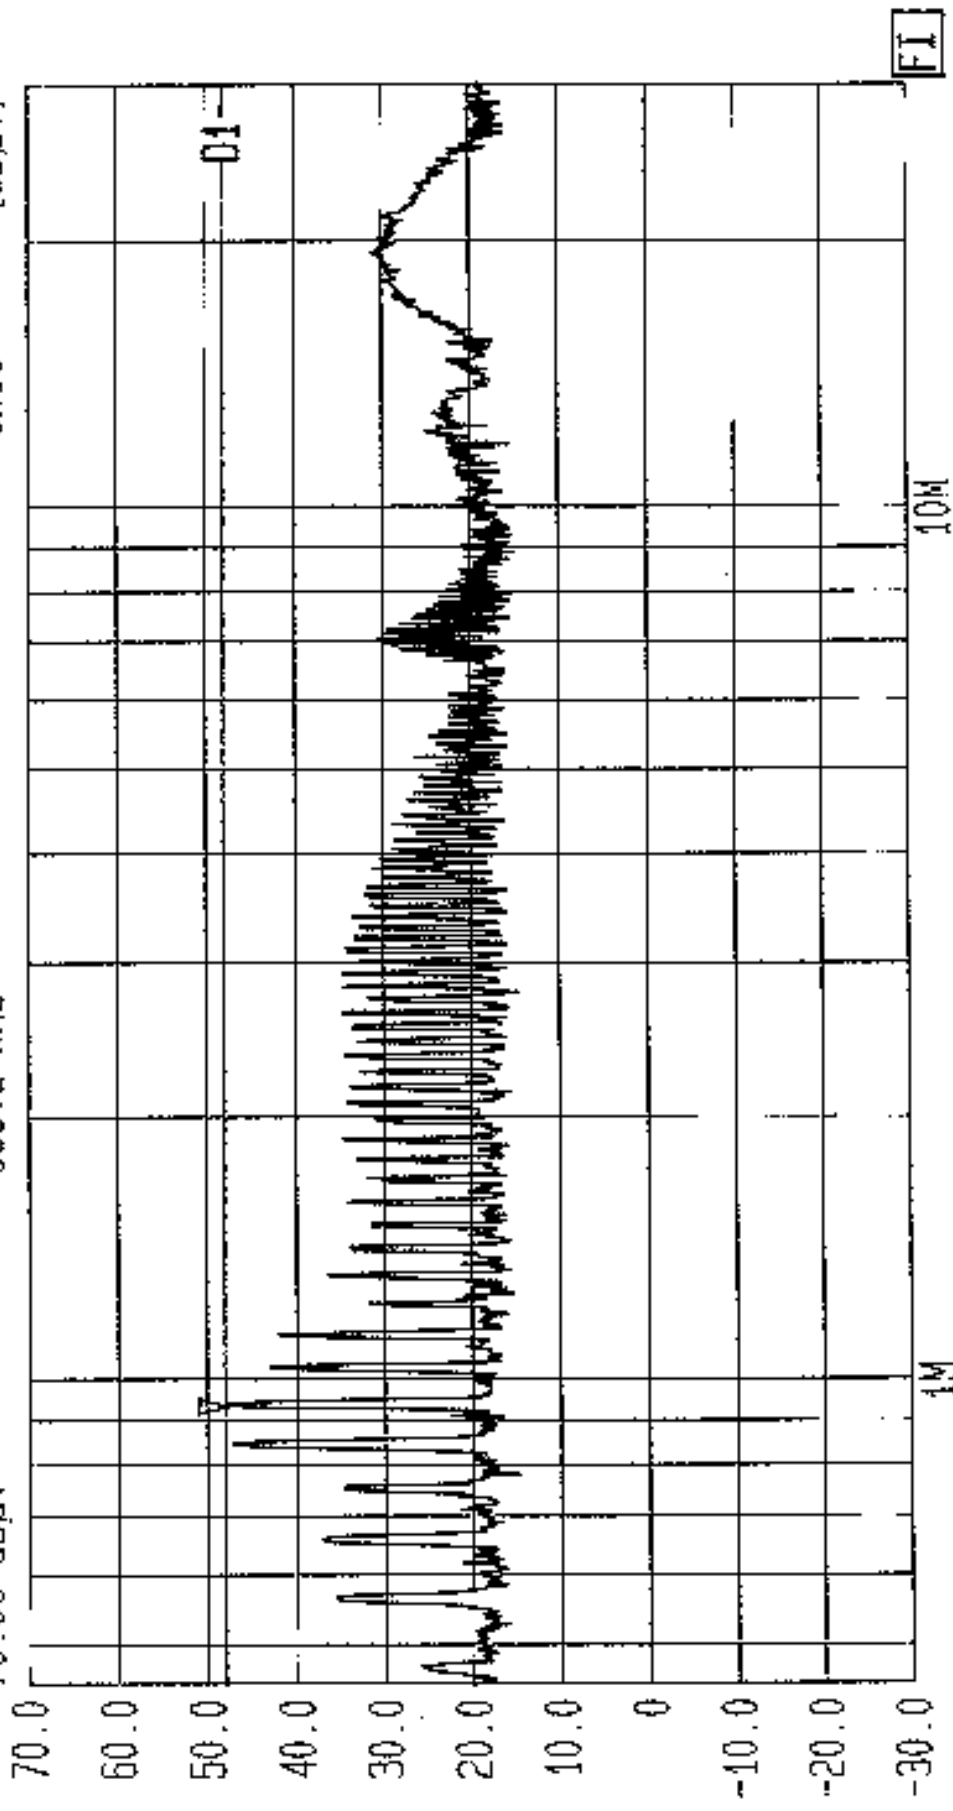

Start 450 kHz Stop 30 MHz
Span 29.55 MHz Sweep 2.2 s
Center 3.67423 MHz
Conducted... Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit
Limit.FCC Part 15.407 (b (5)). Tx: 5.25-5.35GHz. Bot Chan. Neutral 6PH/38658/JD04/165



Date 30.Mar.'99 Time 12:25:31

Ref.Lvl 70.00 dBμV

Marker 47.66 dBμV

940.6 kHz

Res.Bw

TG.Lvl

CF.Stp

9 kHz [imp]

Off

2.955 MHz

Vid.Bw


RF.Att

Unit

10 kHz

10 dB

[dBμV]

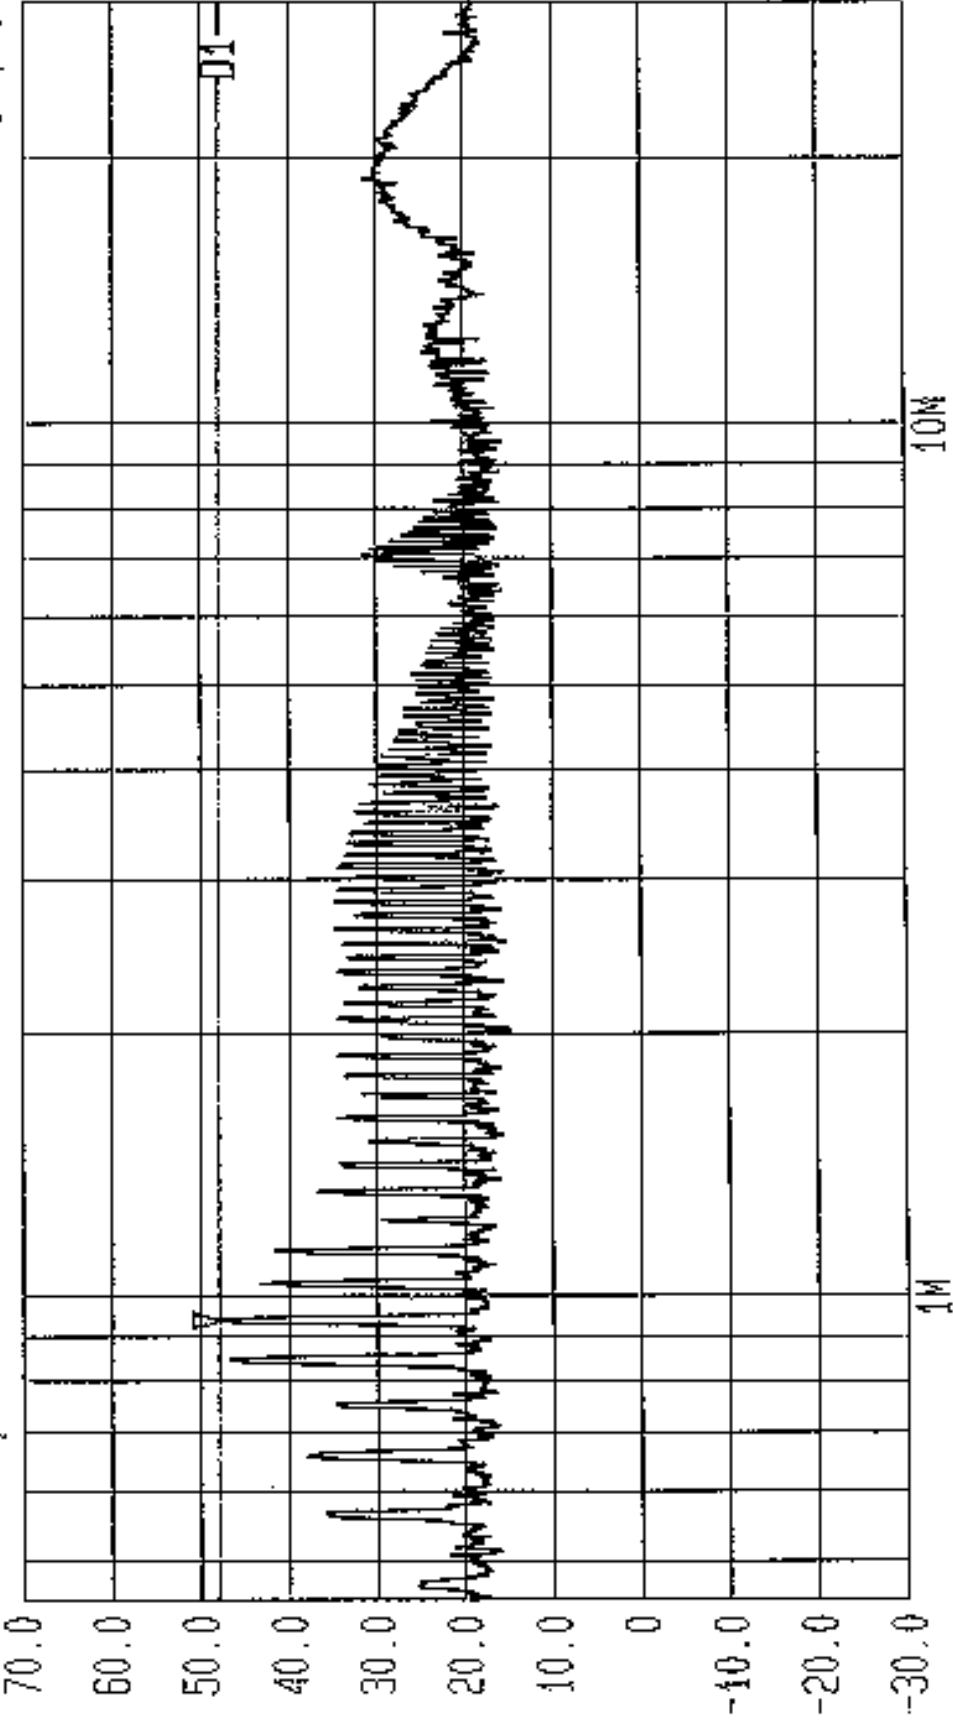

FI

Start

450 kHz

Span

29.55 MHz

Center

3.67423 MHz

Sweep

2.2 s

Stop

30 MHz

Conducted. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit
Limit.FCC Part 15.407 (b (5)) . Tx 5.25-5.35GHz. Top Chan. Neutral GPH/38658/JD04/166



Date 30.Mar.'99 Time 12:31:13

Ref.Lvl 70.00 dBμV

Marker 47.63 dBμV

940.6 kHz

Res.Bw

IG.Lvl

CF.Stp

9 kHz [imp]

off

2.955 MHz

Vid.Bw


RF.Att

Unit

10 kHz

10 dB

[dBμV]

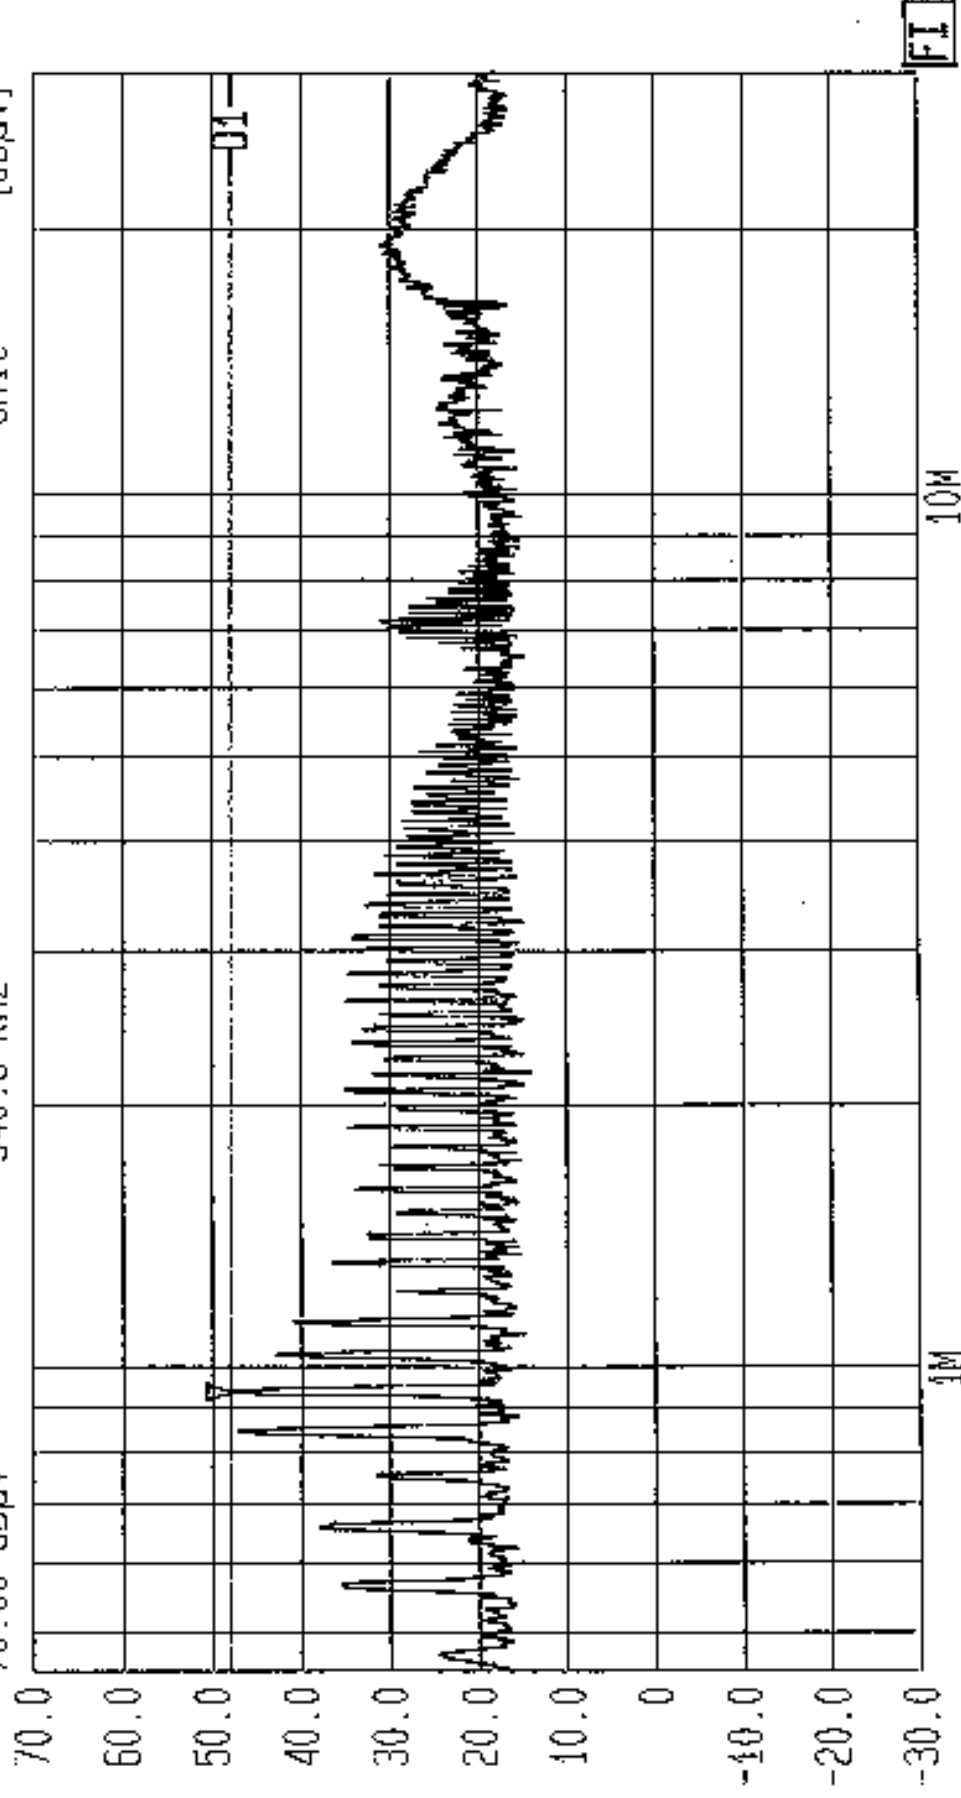

Start

450 kHz

Span

29.55 MHz

Center

3.67423 MHz

Sweep

2.2 5

Stop

30 MHz

Conducted. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit
Limit.FCC Part 15.407 (b (5)). Tx.5.725-5.825GHz. Top Chan. Neutral GPH/38658/JD04/167



Date 30.Mar.'99 Time 12:36:55

Ref.Lvl 70.00 dBμV

Marker 47.51 dBμV

940.6 kHz

Res.Bw

TG.Lvl

CF.Stp

9 kHz [imp]

Off

2.955 MHz

Vid.Bw

RF.Att

Unit

10 kHz

10 dB

[dBμV]

70.0

60.0

50.0

40.0

30.0

20.0


10.0

0

-10.0

-20.0

-30.0

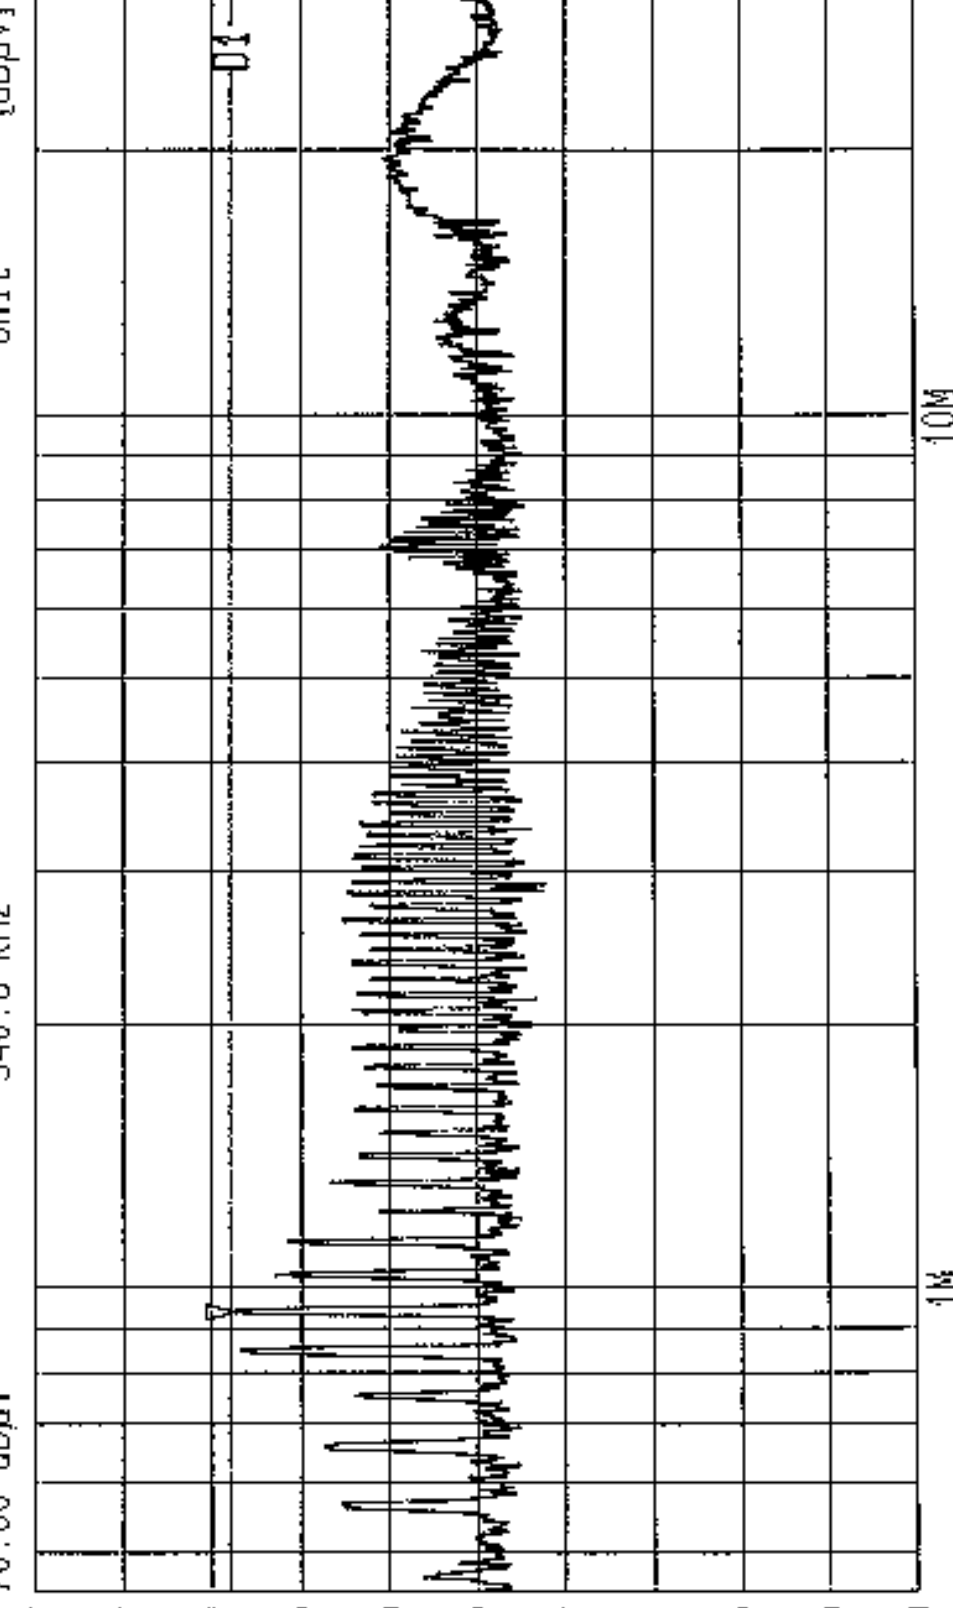

FI

Start

450 kHz

Span

29.55 MHz

Center

3.67423 MHz

Sweep

2.2 s

Stop


30 MHz

Conducted, Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit
Limit.FCC Part 15.407 (b (5)). Tx. 5.725-5.825GHz. Bot Chan. Neutral GPH/38658/JD04/158



Date 30.Mar.'99 Time 18:41:25
Ref.Lvl Marker -89.08 dBm
-50.00 dBm 4.9025102 GHz

Res.Bw 1.0 kHz [3dB]
TG.Lvl Off
CF.Stp 10.000 kHz
Vid.Bw 1 kHz
RF.Att 0 dB
Unit [dBm]

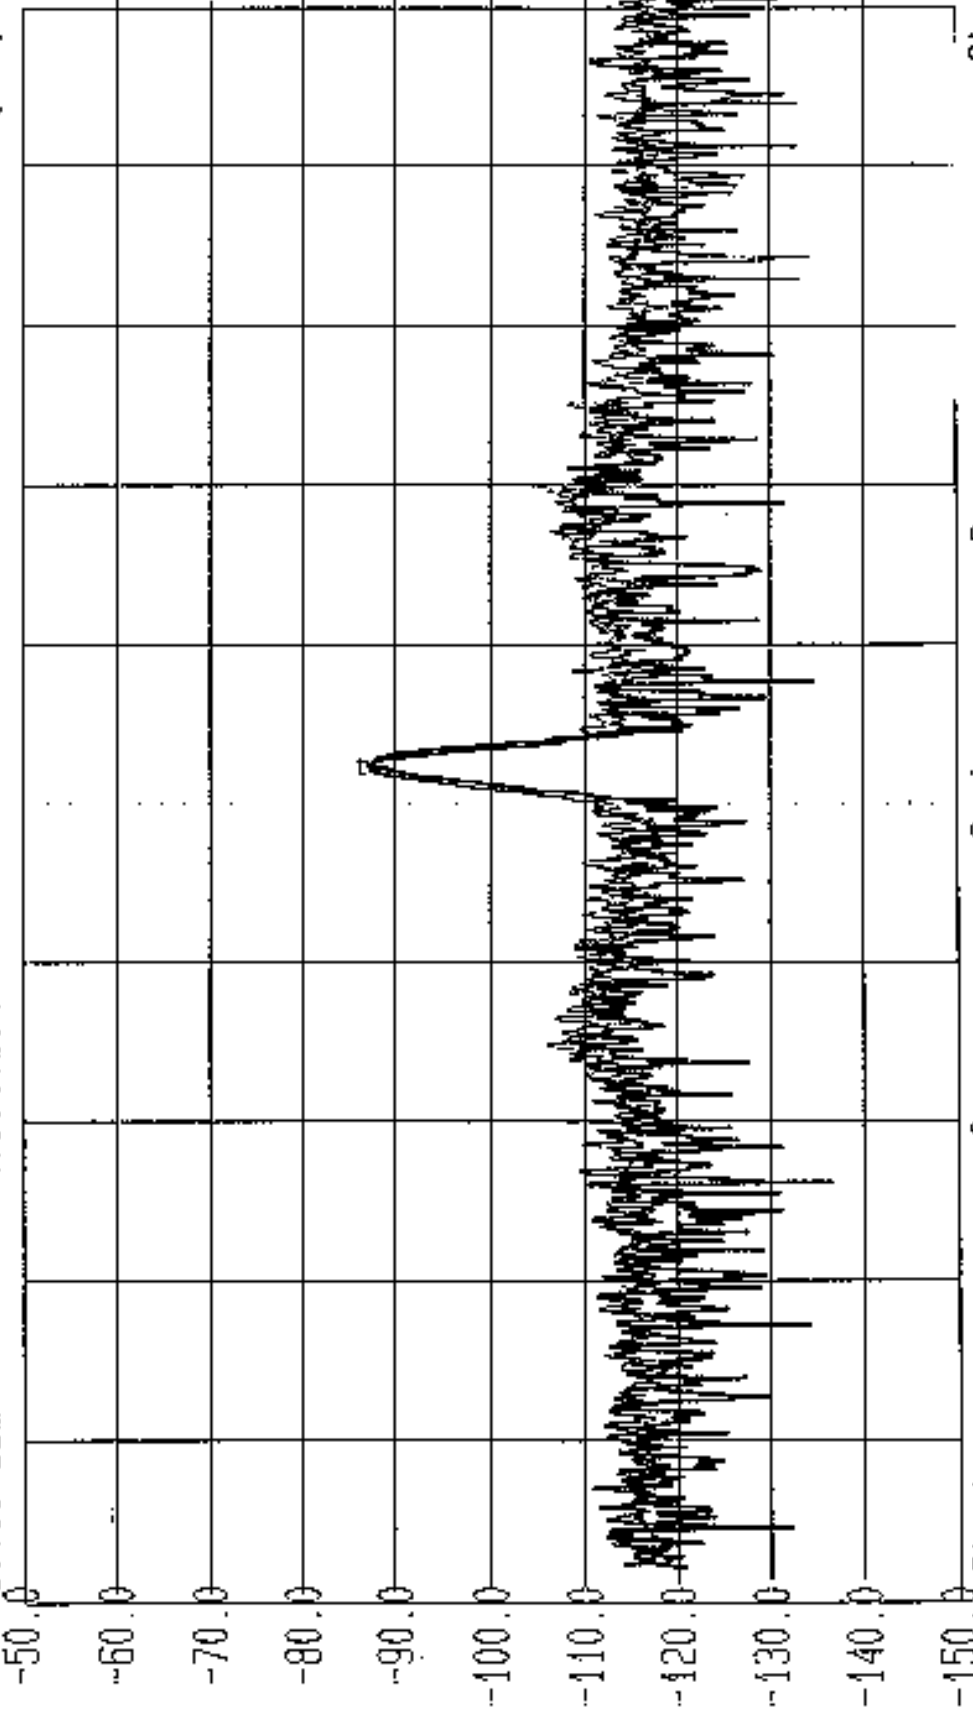


Start 4.902460222 GHz Span 100 kHz Center 4.902510222 GHz Sweep 300 ms Stop 4.902560222 GHz
Temperature. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit
Supply Variation @20C. 0: Green. -15: Black. 15: Blue. GPH/36658/JD04/169



Date 30.Mar.'99 Time 18:54:03
Ref.Lvl Marker -89.08 dBm
-50.00 dBm 4.9025102 GHz

Res.Bw 1.0 kHz [3dB] Vid.Bw 1 kHz
IG.Lvl off
CF.Stp 10.000 kHz
RF.Att 0 dB
Unit [dBm]

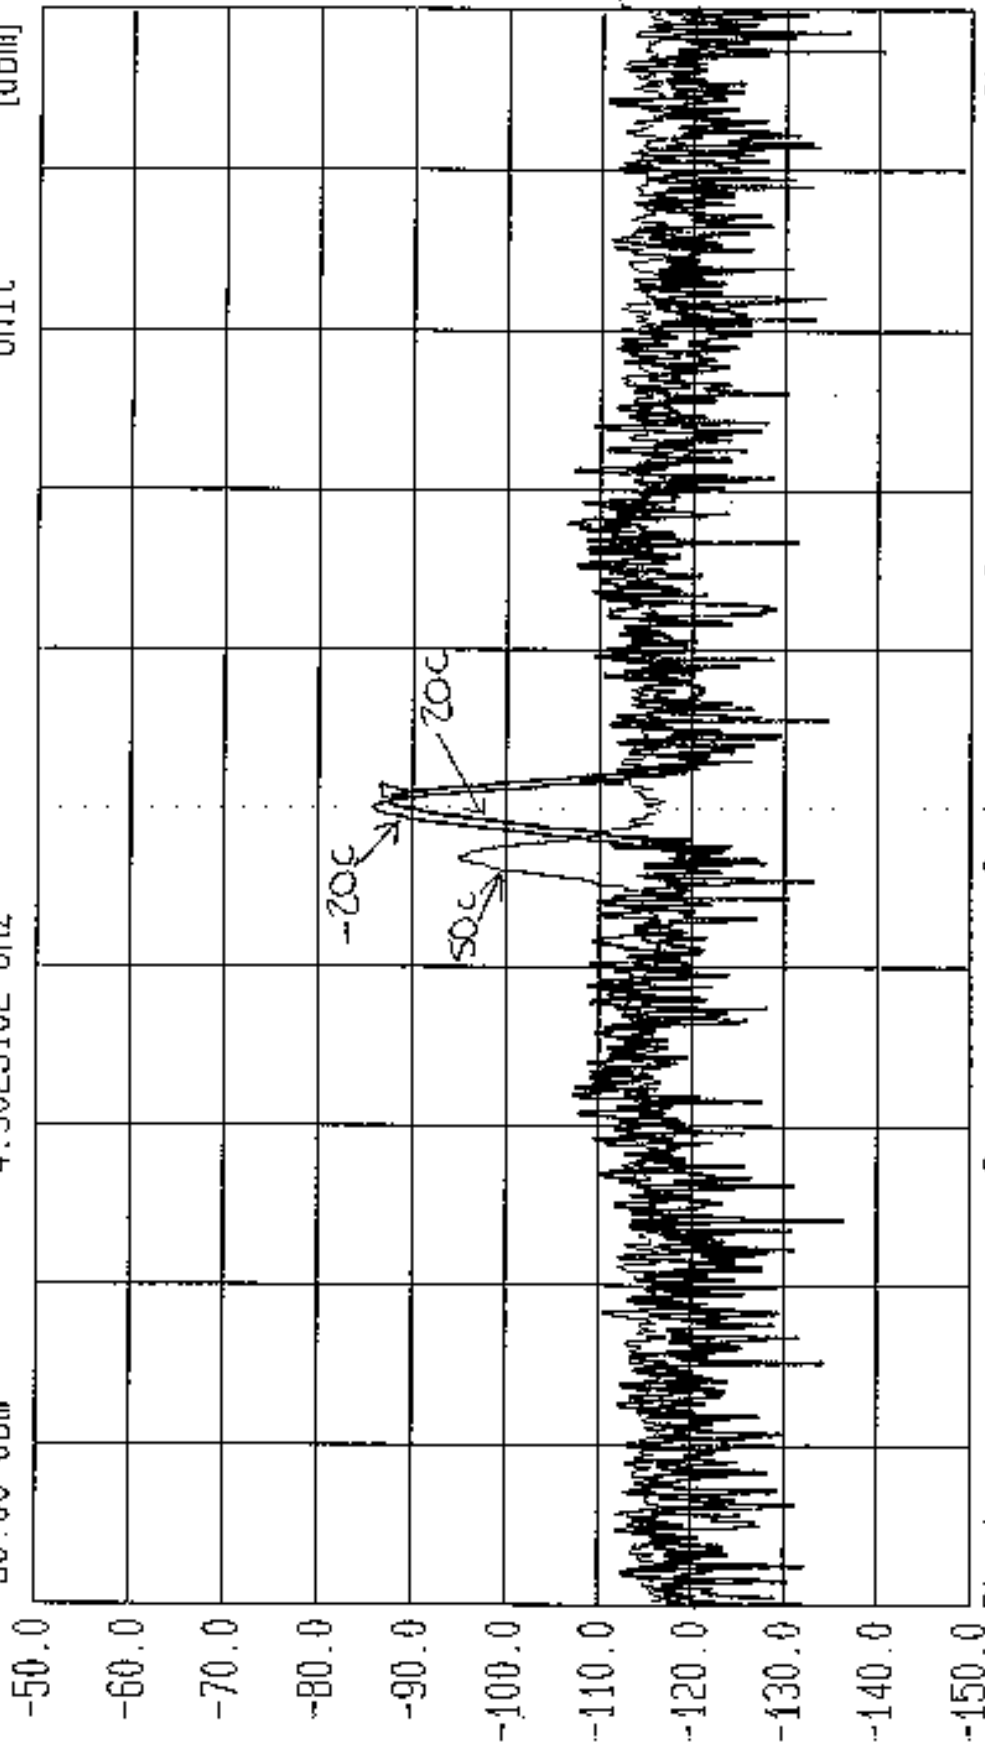

Start 4.902460222 GHz Span 100 kHz Center 4.902510222 GHz Sweep 300 ms Stop 4.902560222 GHz
Temperature. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Subscriber Unit
Variation -20C: Red. 20C: Green. 50C: Black. GPH/36558/JD04/170

Appendix 5. Photographs of EUT

This appendix contains the following photographs:

Photo Reference Number	Title
PHT/38658JD04/001:	Conducted Emissions – Front View
PHT/38658JD04/002:	Conducted Emissions – Side View
PHT/38658JD04/003:	Radiated Emissions – Front View
PHT/38658JD04/004:	Radiated Emissions – Rear View

These pages are not included in the total number of pages for this report.

RADIO FREQUENCY INVESTIGATION LTD.

EMC Department

Test Of: Adaptive Broadband Ltd
To: AB-ACCESS Subscriber Unit (SU)
F.C.C. Part 15 Subpart E: 1998

TEST REPORT

S.No: RFI/EMCB1/RP38658A

Page 60 of 60

Issue Date: 13 December 2000

This page has been left intentionally blank.

EMC Department

Test Of: Adaptive Broadband Ltd
AB-ACCESS Subscriber Unit (SU)
To: F.C.C. Part 15 Subpart E: 1998

PHT/38658JD04/001: Conducted Emissions – Front View



EMC Department

Test Of: Adaptive Broadband Ltd
AB-ACCESS Subscriber Unit (SU)
To: F.C.C. Part 15 Subpart E: 1998

PHT/38658JD04/002: Conducted Emissions – Side View



EMC Department

Test Of: Adaptive Broadband Ltd
AB-ACCESS Subscriber Unit (SU)
To: F.C.C. Part 15 Subpart E: 1998

PHT/38658JD04/003: Radiated Emissions – Front View



EMC Department

Test Of: Adaptive Broadband Ltd
AB-ACCESS Subscriber Unit (SU)
To: F.C.C. Part 15 Subpart E: 1998

PHT/38658JD04/004: Radiated Emissions – Rear View

