

MODOTTEL -- WTE-320(Trimode Phone AMPS Head SAR)

SAM(835M) Phantom; Right Hand Section; Probe: ET3DV6 - SN1703; ConvF(6.80,6.80,6.80);

Med. parameter 835 MHz Brain: $\sigma = 0.90$ mho/m $\epsilon_r = 40.7$ $\rho = 1.00$ g/cm³; Crest factor: 1.0;


SAR (1g): 1.03 mW/g, SAR (10g): 0.667 mW/g

Modotell Phone Model : WTE-320

AMPS Mode, Ch.991[824.04MHz];Standard Battery; Ambient Temp = 23 °C/Meas. Tissue Temp. = 22 °C

Conducted Power = 25.5dbm; Right Head Phantom, Cheek / Touch position; Antenna In

Test Date -- 09 / 05 / 2003 [FCC/OET Bulletin65 - Supplement C, July 2001]

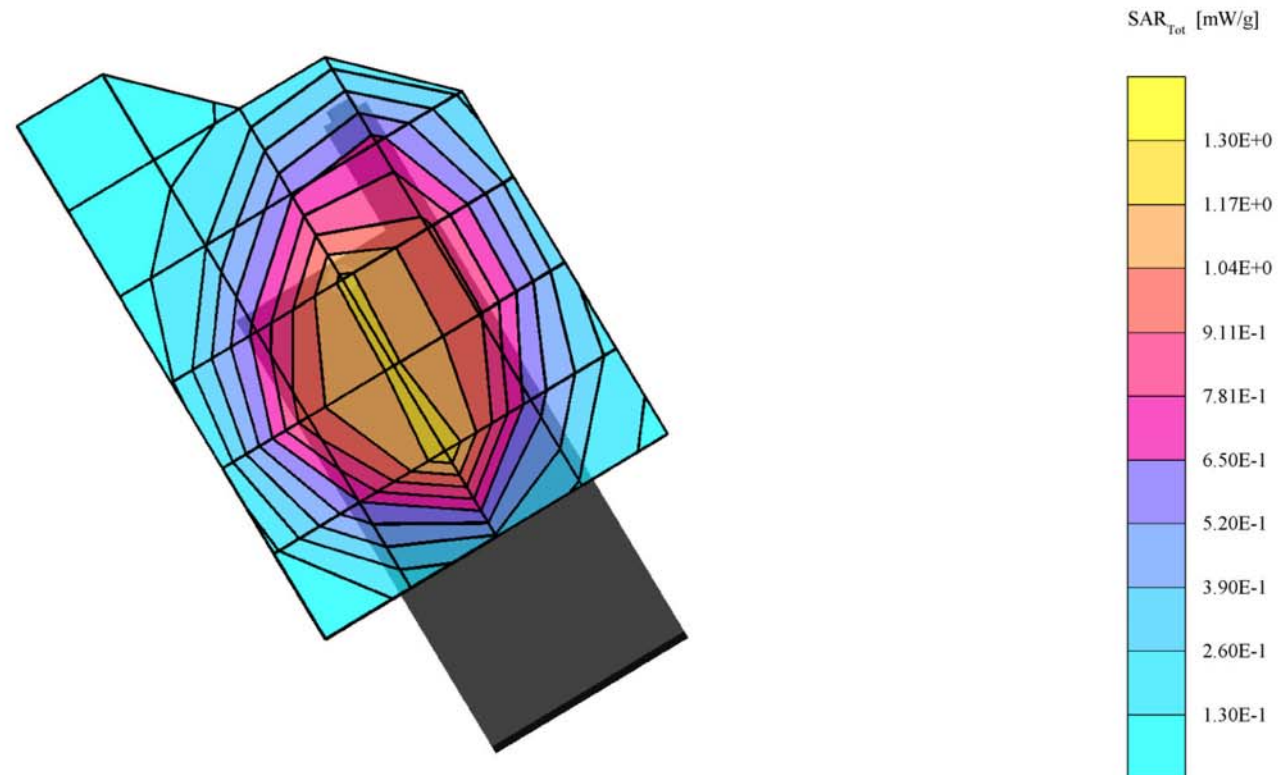

Digital EMC Co.,Ltd


FCC ID : POQWTE-320

MODOTTEL -- WTE-320(Trimode Phone AMPS Head SAR)

SAM(835M) Phantom; Right Hand Section; Probe: ET3DV6 - SN1703; ConvF(6.80,6.80,6.80);
Med. parameter 835 MHz Brain: $\sigma = 0.90$ mho/m $\epsilon_r = 40.7$ $\rho = 1.00$ g/cm³; Antenna Position -- Fix; Crest factor: 1.0;
SAR (1g): 1.46 mW/g, SAR (10g): 0.852 mW/g

Modotell Phone Model : WTE-320

AMPS Mode, Ch.991[824.04MHz];Standard Battery; Ambient Temp = 23 °C/Meas. Tissue Temp. = 22 °C
Conducted Power = 25.5dbm; Right Head Phantom, Cheek / Touch position; Antenna Out
Test Date -- 09 / 05 / 2003 [FCC/OET Bulletin65 - Supplement C, July 2001]

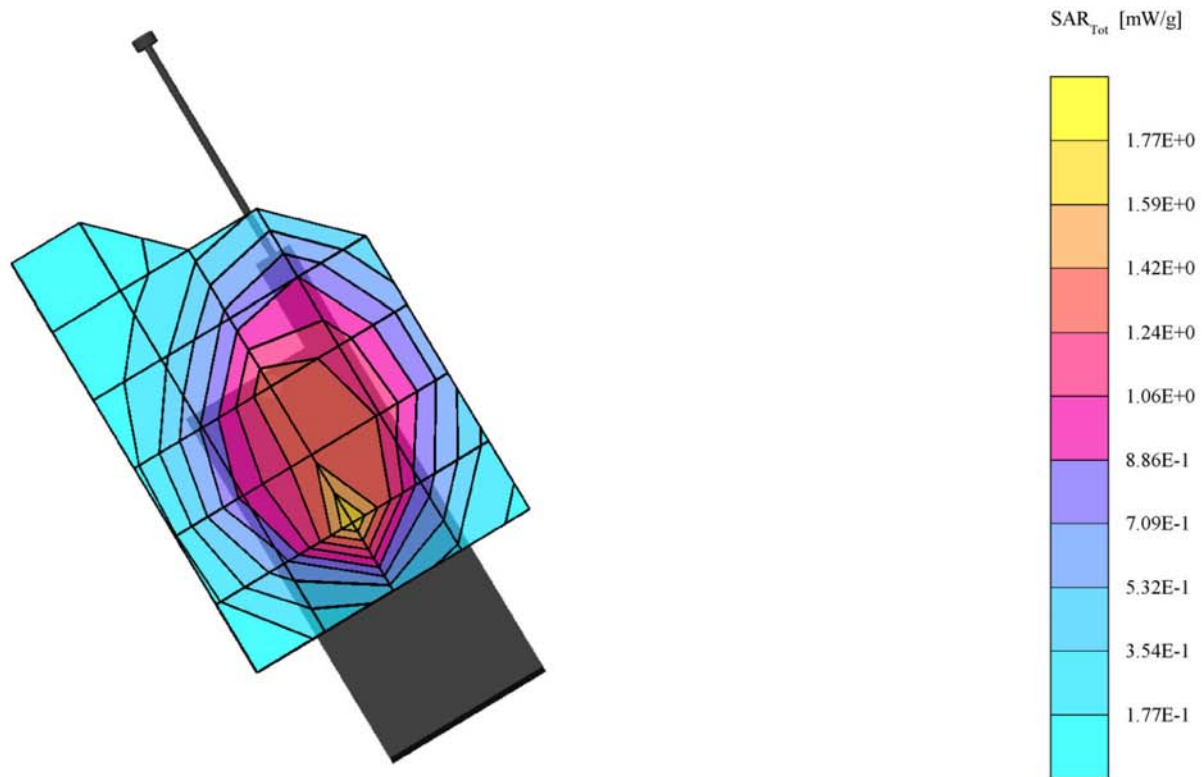

Digital EMC Co.,Ltd

FCC ID : POQWTE-320

MODOTTEL -- WTE-320(Trimode Phone AMPS Head SAR)

SAM(835M) Phantom; Right Hand Section; Probe: ET3DV6 - SN1703; ConvF(6.80,6.80,6.80);

Med. parameter 835 MHz Brain: $\sigma = 0.90$ mho/m $\epsilon_r = 40.7$ $\rho = 1.00$ g/cm³; Crest factor: 1.0;


SAR (1g): 0.790 mW/g, SAR (10g): 0.545 mW/g

Modotell Phone Model : WTE-320

AMPS Mode, Ch.384[836.52MHz];Standard Battery; Ambient Temp = 23 °C/Meas. Tissue Temp. = 22 °C

Conducted Power = 25.5dbm; Right Head Phantom, Cheek / Touch position; Antenna In

Test Date -- 09 / 05 / 2003 [FCC/OET Bulletin65 - Supplement C, July 2001]

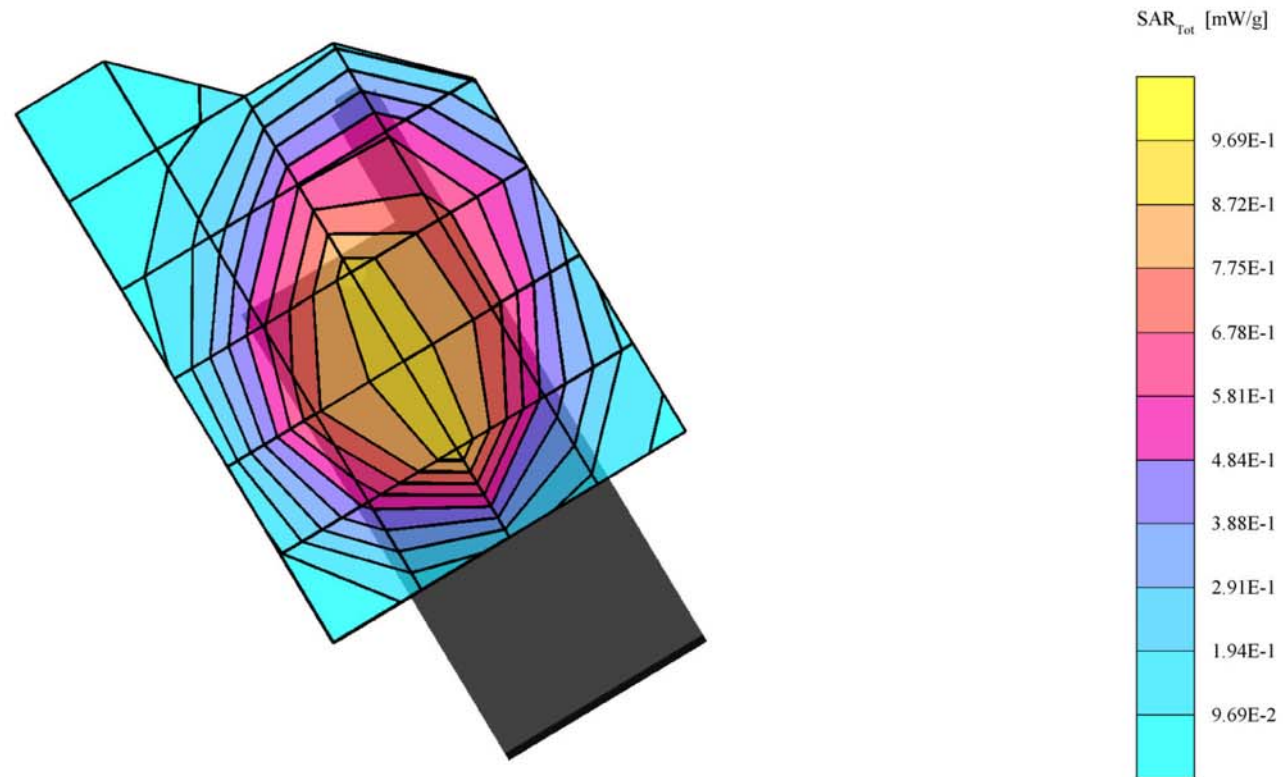

Digital EMC Co.,Ltd

FCC ID : POQWTE-320

MODOTTEL -- WTE-320(Trimode Phone AMPS Head SAR)

SAM(835M) Phantom; Right Hand Section; Probe: ET3DV6 - SN1703; ConvF(6.80,6.80,6.80);

Med. parameter 835 MHz Brain: $\sigma = 0.90$ mho/m $\epsilon_r = 40.7$ $\rho = 1.00$ g/cm³; Crest factor: 1.0;


SAR (1g): 1.09 mW/g, SAR (10g): 0.657 mW/g

Modottel Phone Model : WTE-320

AMPS Mode, Ch.384[836.52MHz];Standard Battery; Ambient Temp = 23 °C/Meas. Tissue Temp. = 22 °C

Conducted Power = 25.5dbm; Right Head Phantom, Cheek / Touch position; Antenna Out

Test Date -- 09 / 05 / 2003 [FCC/OET Bulletin65 - Supplement C, July 2001]

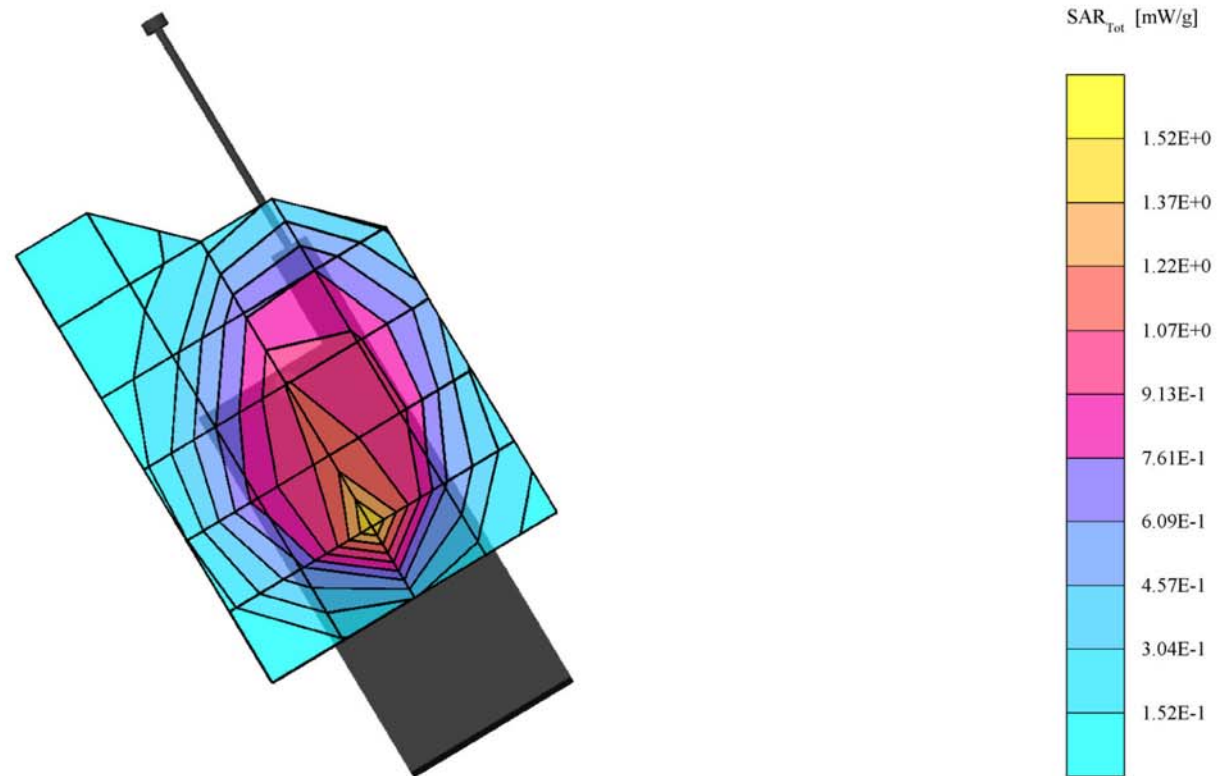

Digital EMC Co.,Ltd

FCC ID : POQWTE-320

MODOTTEL -- WTE-320(Trimode Phone AMPS Head SAR)

SAM(835M) Phantom; Right Hand Section; Probe: ET3DV6 - SN1703; ConvF(6.80,6.80,6.80);

Med. parameter 835 MHz Brain: $\sigma = 0.90$ mho/m $\epsilon_r = 40.7$ $\rho = 1.00$ g/cm³; Crest factor: 1.0;


SAR (1g): 0.900 mW/g , SAR (10g): 0.604 mW/g

Modotitel Phone Model : WTE-320

AMPS Mode, Ch.799[848.97MHz];Standard Battery; Ambient Temp = 23 °C/Meas. Tissue Temp. = 22 °C

Conducted Power = 25.5dbm; Right Head Phantom, Cheek / Touch position; Antenna In

Test Date -- 09 / 05 / 2003 [FCC/OET Bulletin65 - Supplement C, July 2001]

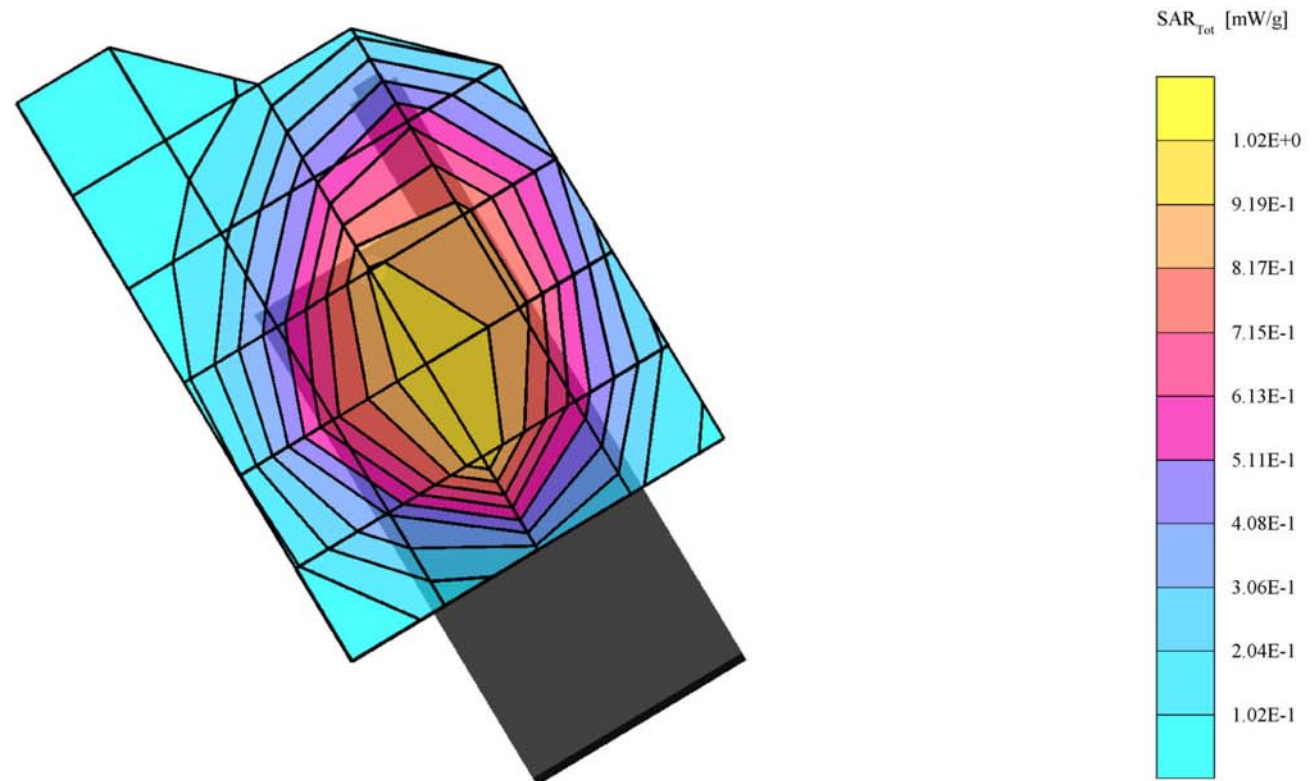

Digital EMC Co.,Ltd

FCC ID : POQWTE-320

MODOTTEL -- WTE-320(Trimode Phone AMPS Head SAR)

SAM(835M) Phantom; Right Hand Section; Probe: ET3DV6 - SN1703; ConvF(6.80,6.80,6.80);

Med. parameter 835 MHz Brain: $\sigma = 0.90$ mho/m $\epsilon_r = 40.7$ $\rho = 1.00$ g/cm³; Crest factor: 1.0;


SAR (1g): 1.12 mW/g , SAR (10g): 0.738 mW/g

Modotell Phone Model : WTE-320

AMPS Mode, Ch.799[848.97MHz];Standard Battery; Ambient Temp = 23 °C/Meas. Tissue Temp. = 22 °C

Conducted Power = 25.5dbm; Right Head Phantom, Cheek / Touch position; Antenna Out

Test Date -- 09 / 05 / 2003 [FCC/OET Bulletin65 - Supplement C, July 2001]

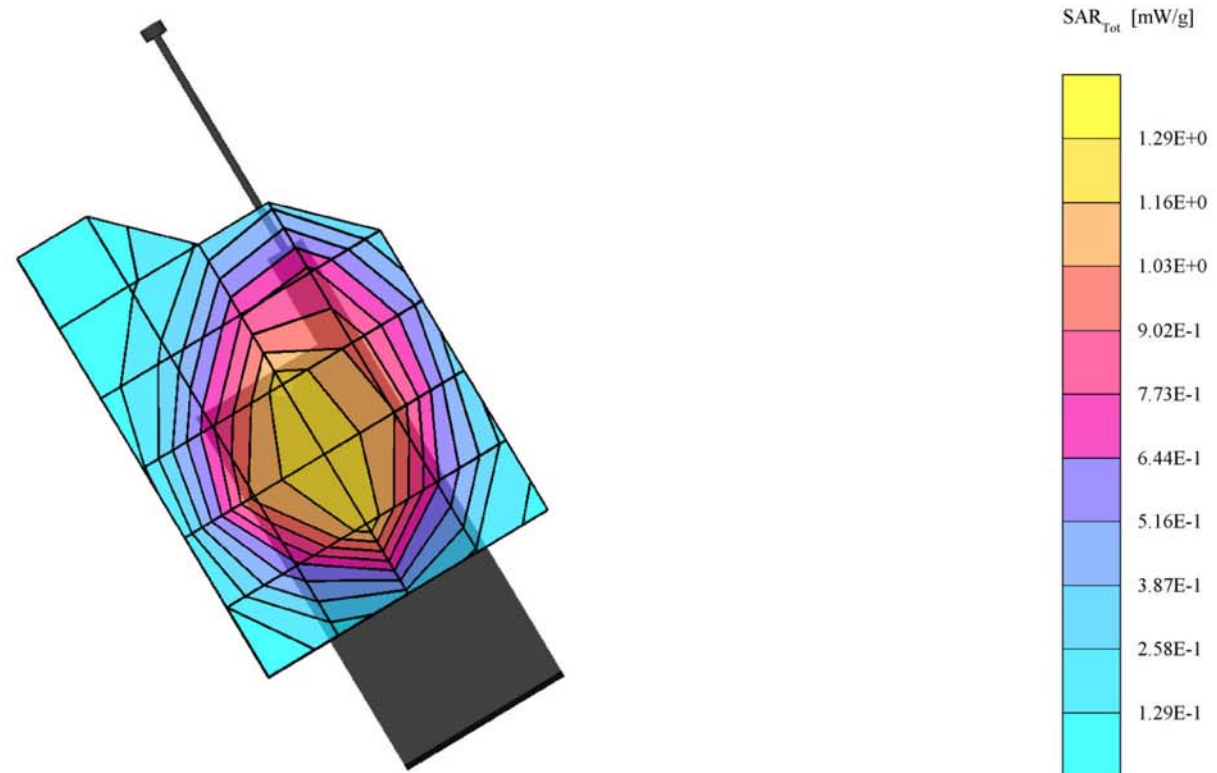

Digital EMC Co.,Ltd

FCC ID : POQWTE-320

MODOTTEL -- WTE-320(Trimode Phone AMPS Head SAR)

SAM(835M) Phantom; Right Hand Section; Probe: ET3DV6 - SN1703; ConvF(6.80,6.80,6.80);

Med. parameter 835 MHz Brain: $\sigma = 0.90$ mho/m $\epsilon_r = 40.7$ $\rho = 1.00$ g/cm³; Crest factor: 1.0;


SAR (1g): 1.08 mW/g, SAR (10g): 0.673 mW/g

Modotitel Phone Model : WTE-320

AMPS Mode, Ch.991[824.04MHz];Standard Battery; Ambient Temp = 23.5 °C/Meas. Tissue Temp. = 22 °C

Conducted Power = 25.5dbm; Right Head Phantom, 15° Degree Tilt position; Antenna In

Test Date -- 09 / 08 / 2003 [FCC/OET Bulletin65 - Supplement C, July 2001]

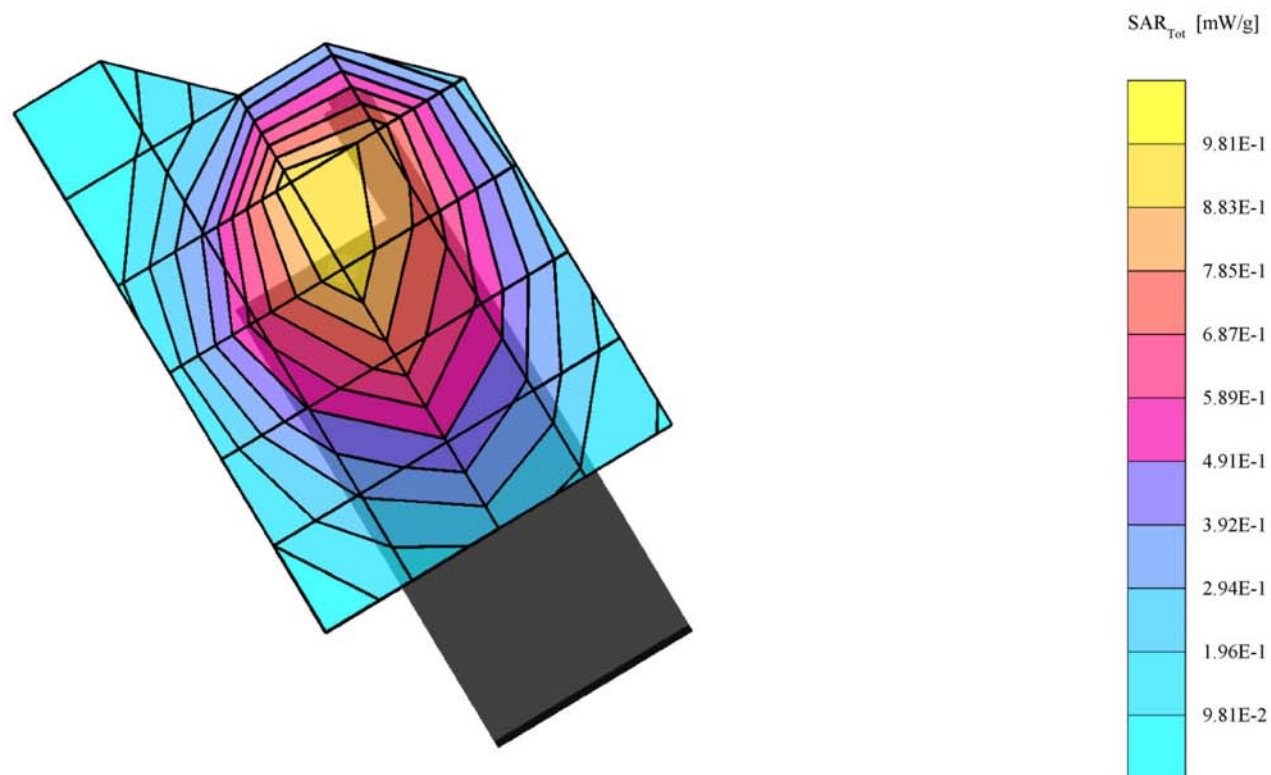

Digital EMC Co.,Ltd

FCC ID : POQWTE-320

MODOTTEL -- WTE-320(Trimode Phone AMPS Head SAR)

SAM(835M) Phantom; Right Hand Section; Probe: ET3DV6 - SN1703; ConvF(6.80,6.80,6.80);

Med. parameter 835 MHz Brain: $\sigma = 0.90$ mho/m $\epsilon_r = 40.7$ $\rho = 1.00$ g/cm³; Crest factor: 1.0;


SAR (1g): 1.39 mW/g, SAR (10g): 0.787 mW/g

Modottel Phone Model : WTE-320

AMPS Mode, Ch.991[824.04MHz];Standard Battery; Ambient Temp = 23.5 °C/Meas. Tissue Temp. = 22 °C

Conducted Power = 25.5dbm; Right Head Phantom, 15° Degree Tilt position; Antenna Out

Test Date -- 09 / 08 / 2003 [FCC/OET Bulletin65 - Supplement C, July 2001]

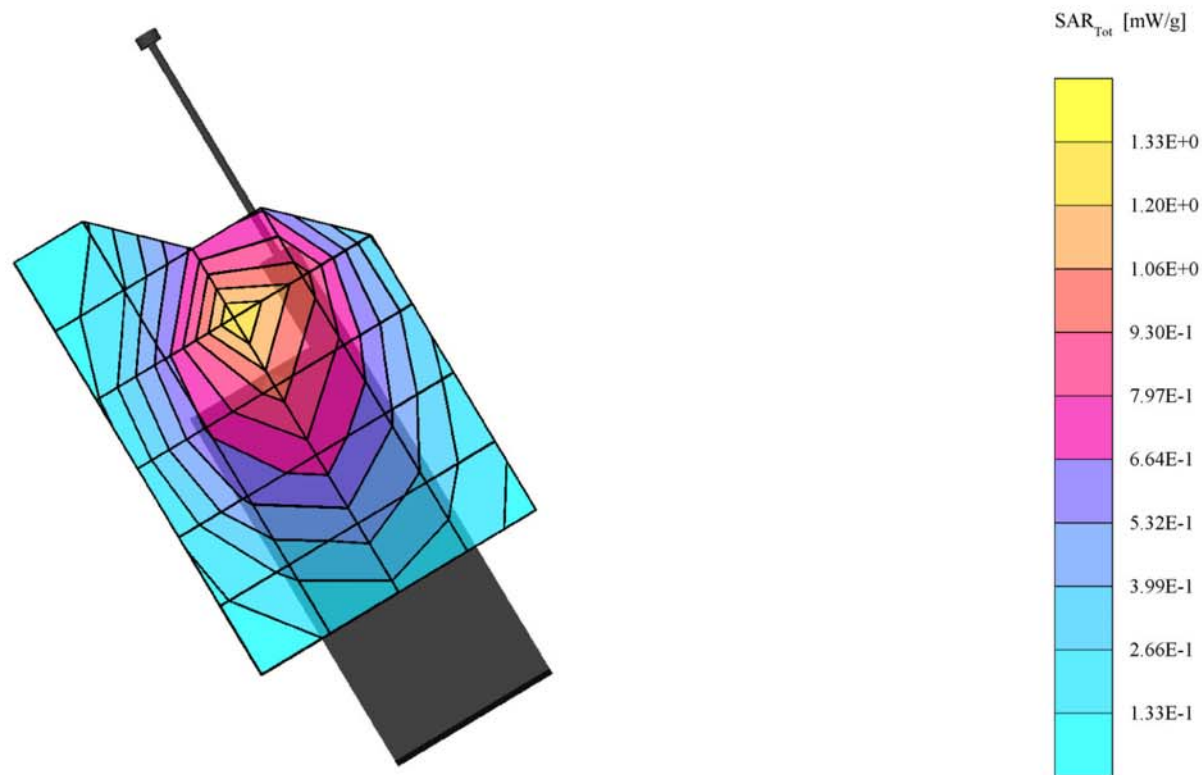

Digital EMC Co.,Ltd

FCC ID : POQWTE-320

MODOTTEL -- WTE-320(Trimode Phone AMPS Head SAR)

SAM(835M) Phantom; Right Hand Section; Probe: ET3DV6 - SN1703; ConvF(6.80,6.80,6.80);

Med. parameter 835 MHz Brain: $\sigma = 0.90$ mho/m $\epsilon_r = 40.7$ $\rho = 1.00$ g/cm³; Crest factor: 1.0;


SAR (1g): 0.961 mW/g, SAR (10g): 0.510 mW/g

Modotell Phone Model : WTE-320

AMPS Mode, Ch.384[836.52MHz];Standard Battery; Ambient Temp = 23.5 °C/Meas. Tissue Temp. = 22 °C

Conducted Power = 25.5dbm; Right Head Phantom, 15° Degree Tilt position; Antenna In

Test Date -- 09 / 08 / 2003 [FCC/OET Bulletin65 - Supplement C, July 2001]

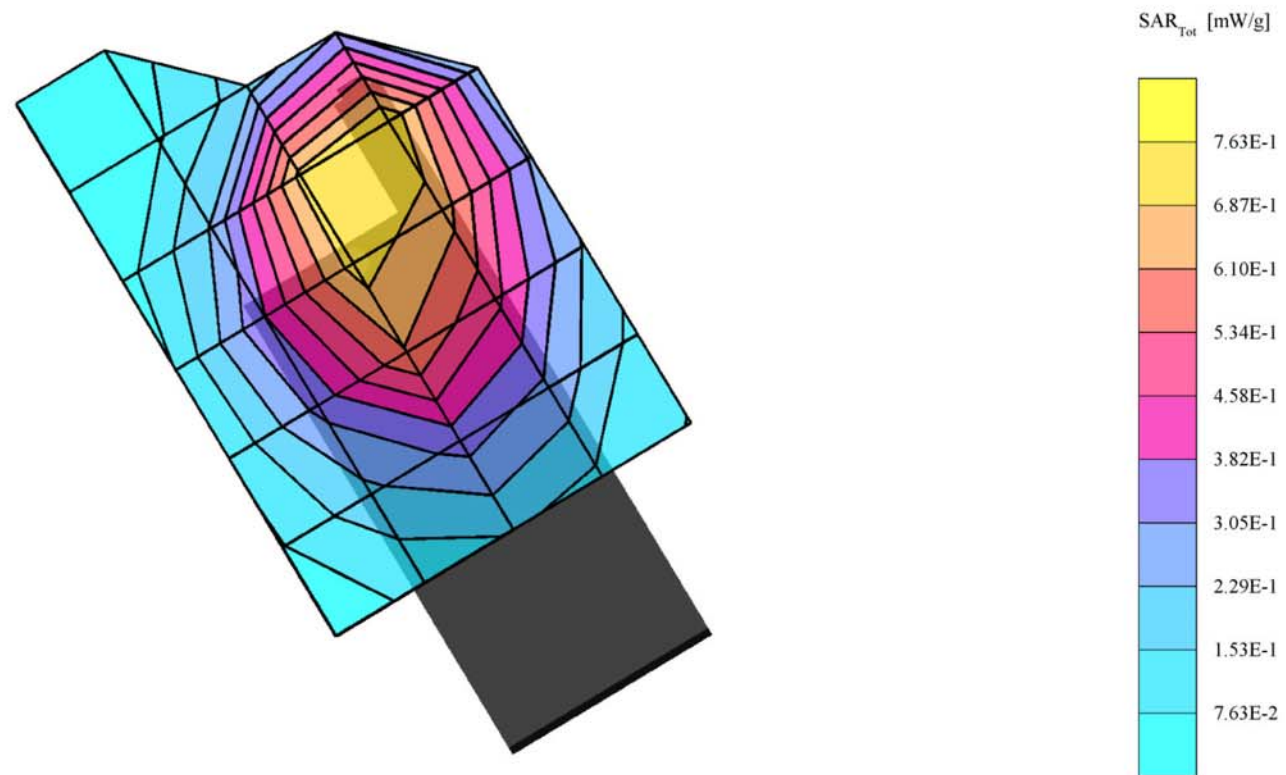

Digital EMC Co.,Ltd

FCC ID : POQWTE-320

MODOTTEL -- WTE-320(Trimode Phone AMPS Head SAR)

SAM(835M) Phantom; Right Hand Section; Probe: ET3DV6 - SN1703; ConvF(6.80,6.80,6.80);

Med. parameter 835 MHz Brain: $\sigma = 0.90$ mho/m $\epsilon_r = 40.7$ $\rho = 1.00$ g/cm³; Crest factor: 1.0;


SAR (1g): 1.17 mW/g, SAR (10g): 0.666 mW/g

Modottel Phone Model : WTE-320

AMPS Mode, Ch.384[836.52MHz];Standard Battery; Ambient Temp = 23.5 °C/Meas. Tissue Temp. = 22 °C

Conducted Power = 25.5dbm; Right Head Phantom, 15° Degree Tilt position; Antenna Out

Test Date -- 09 / 08 / 2003 [FCC/OET Bulletin65 - Supplement C, July 2001]

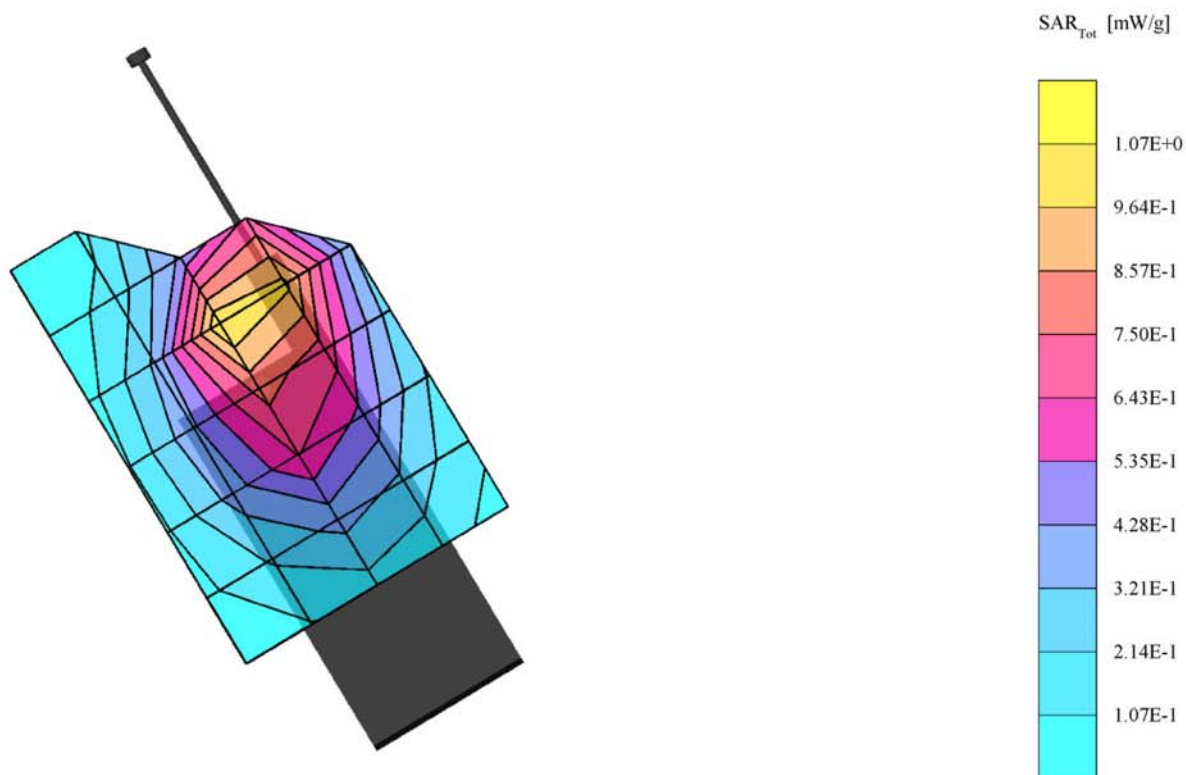

Digital EMC Co.,Ltd

FCC ID : POQWTE-320

MODOTTEL -- WTE-320(Trimode Phone AMPS Head SAR)

SAM(835M) Phantom; Right Hand Section; Probe: ET3DV6 - SN1703; ConvF(6.80,6.80,6.80);

Med. parameter 835 MHz Brain: $\sigma = 0.90$ mho/m $\epsilon_r = 40.7$ $\rho = 1.00$ g/cm³; Crest factor: 1.0;


SAR (1g): 0.821 mW/g, SAR (10g): 0.518 mW/g

Modottel Phone Model : WTE-320


AMPS Mode, Ch.799[848.97MHz];Standard Battery; Ambient Temp = 23.5 °C/Meas. Tissue Temp. = 22 °C

Conducted Power = 25.5dbm; Right Head Phantom, 15° Degree Tilt position; Antenna In

Test Date -- 09 / 08 / 2003 [FCC/OET Bulletin65 - Supplement C, July 2001]

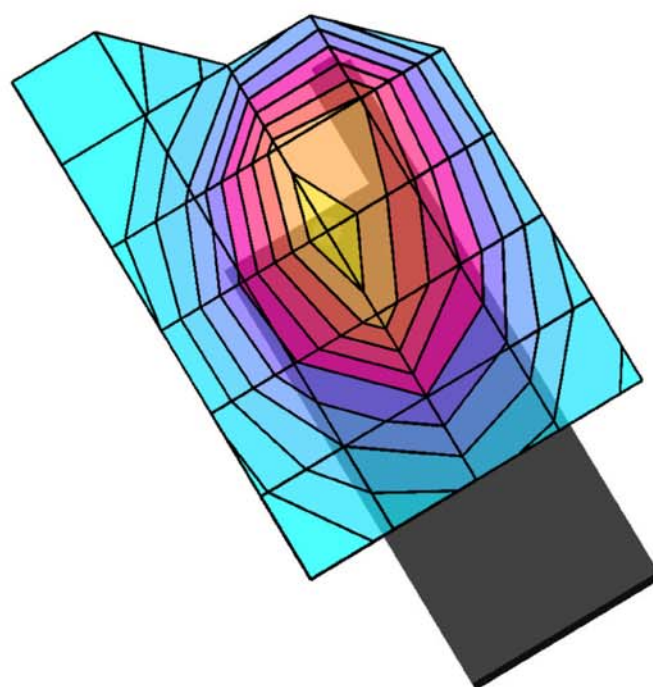

SAR_{Tot} [mW/g]



Digital EMC Co.,Ltd

FCC ID : POQWTE-320

MODOTTEL -- WTE-320(Trimode Phone AMPS Head SAR)

SAM(835M) Phantom; Right Hand Section; Probe: ET3DV6 - SN1703; ConvF(6.80,6.80,6.80);

Med. parameter 835 MHz Brain: $\sigma = 0.90$ mho/m $\epsilon_r = 40.7$ $\rho = 1.00$ g/cm³; Crest factor: 1.0;


SAR (1g): 1.19 mW/g, SAR (10g): 0.685 mW/g

Modottel Phone Model : WTE-320

AMPS Mode, Ch.799[848.97MHz];Standard Battery; Ambient Temp = 23.5 °C/Meas. Tissue Temp. = 22 °C

Conducted Power = 25.5dbm; Right Head Phantom, 15° Degree Tilt position; Antenna Out

Test Date -- 09 / 08 / 2003 [FCC/OET Bulletin65 - Supplement C, July 2001]

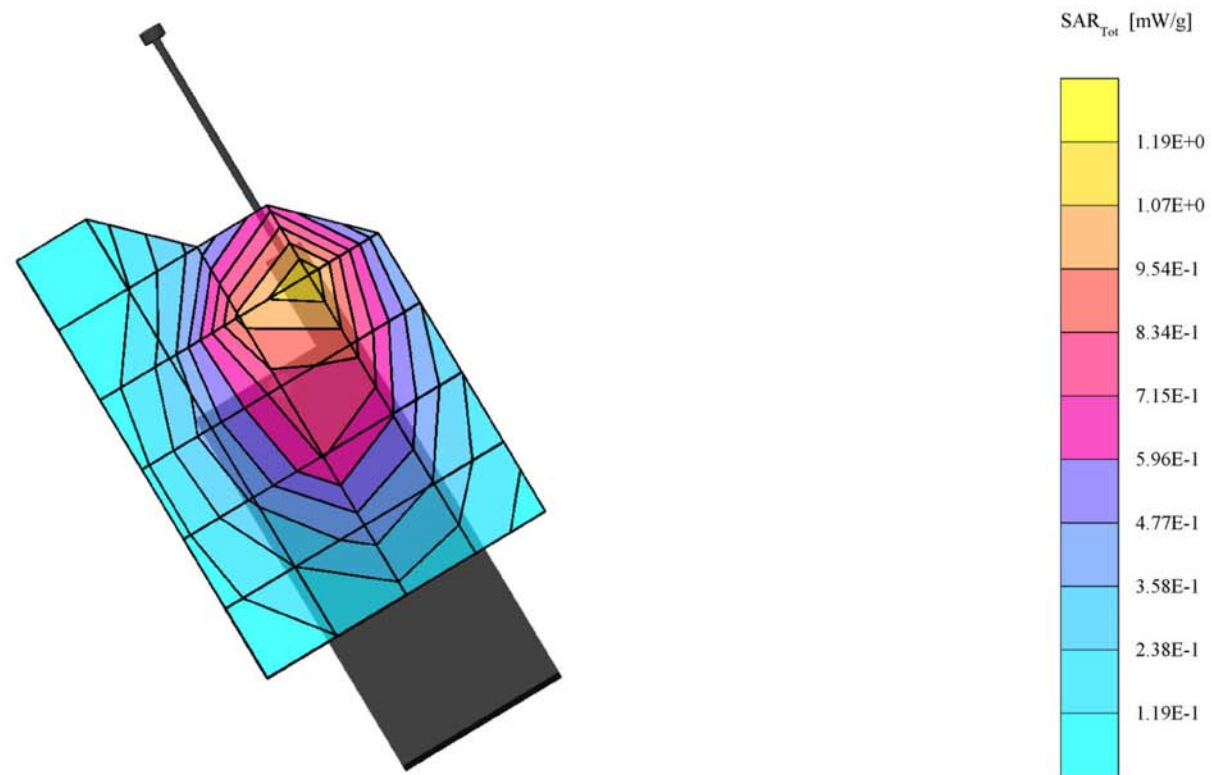

Digital EMC Co.,Ltd

FCC ID : POQWTE-320

MODOTTEL -- WTE-320(Trimode Phone AMPS Head SAR)

SAM(835M) Phantom; Left Hand Section; Probe: ET3DV6 - SN1703; ConvF(6.80,6.80,6.80);

Med. parameter 835 MHz Brain: $\sigma = 0.90$ mho/m $\epsilon_r = 40.7$ $\rho = 1.00$ g/cm³; Crest factor: 1.0;


SAR (1g): 1.18 mW/g, SAR (10g): 0.768 mW/g

Modottel Phone Model : WTE-320

AMPS Mode, Ch.991[824.04MHz];Standard Battery; Ambient Temp = 22.5°C/Meas. Tissue Temp. = 21 °C

Conducted Power = 25.5dBm; Left Head Phantom, Cheek / Touch position; Antenna In

Test Date -- 09 / 04 / 2003 [FCC/OET Bulletin65 - Supplement C, July 2001]

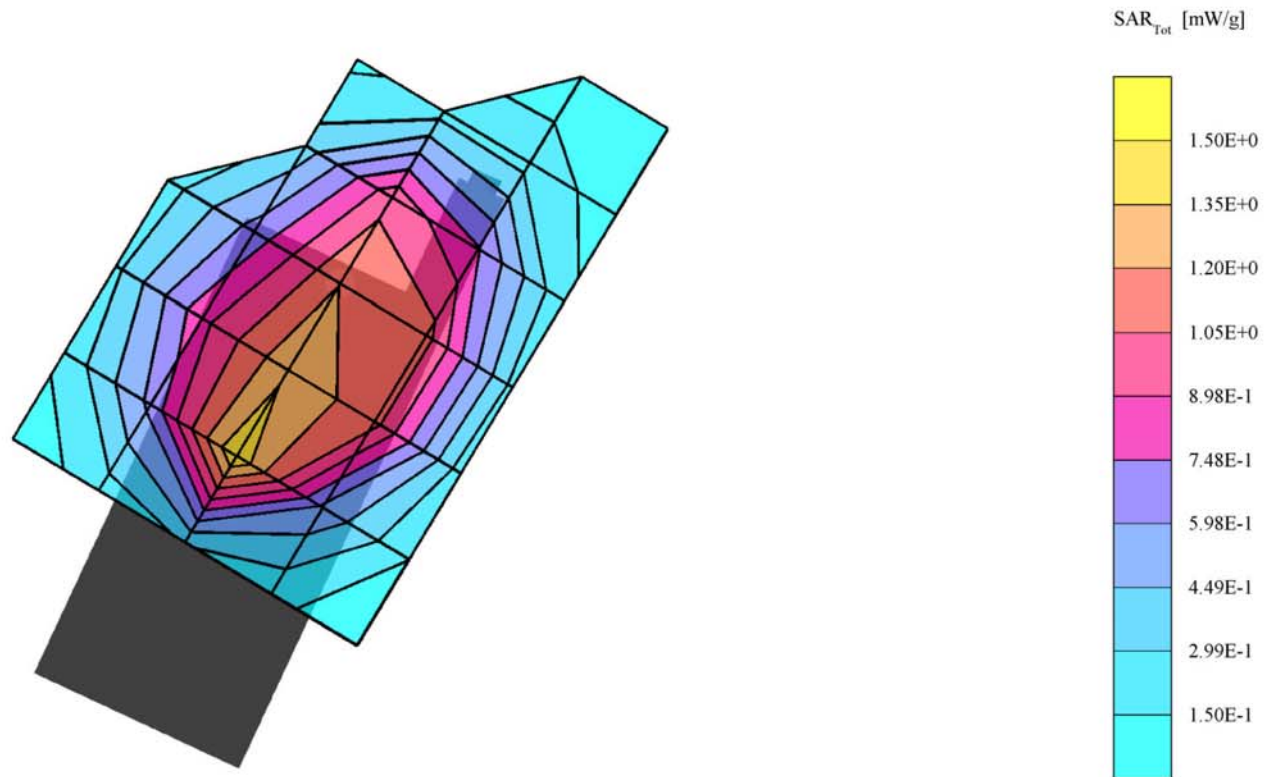

Digital EMC Co.,Ltd

FCC ID : POQWTE-320

MODOTTEL -- WTE-320(Trimode Phone AMPS Head SAR)

SAM(835M) Phantom; Left Hand Section; Probe: ET3DV6 - SN1703; ConvF(6.80,6.80,6.80);

Med. parameter 835 MHz Brain: $\sigma = 0.90$ mho/m $\epsilon_r = 40.7$ $\rho = 1.00$ g/cm³; Crest factor: 1.0;


SAR (1g): 1.23 mW/g, SAR (10g): 0.771 mW/g

Modottel Phone Model : WTE-320


AMPS Mode, Ch.991[824.04MHz];Standard Battery; Ambient Temp = 22.5°C/Meas. Tissue Temp. = 21 °C

Conducted Power = 25.5dBm; Left Head Phantom, Cheek / Touch position; Antenna Out

Test Date -- 09 / 04 / 2003 [FCC/OET Bulletin65 - Supplement C, July 2001]

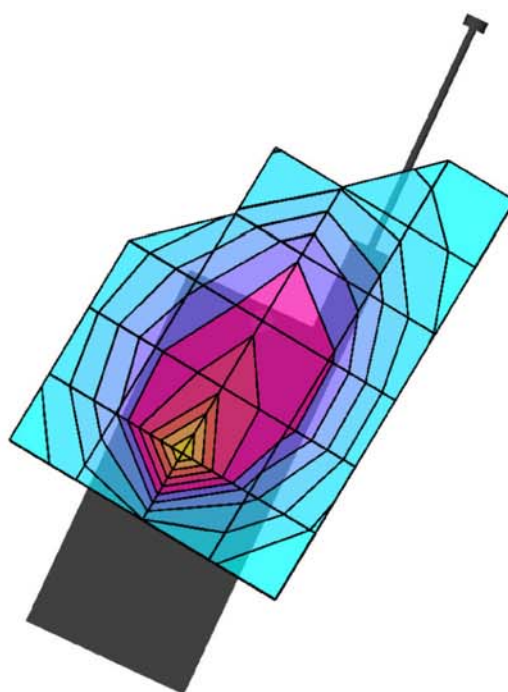

SAR_{Tot} [mW/g]



Digital EMC Co.,Ltd

FCC ID : POQWTE-320

MODOTTEL -- WTE-320(Trimode Phone AMPS Head SAR)

SAM(835M) Phantom; Left Hand Section; Probe: ET3DV6 - SN1703; ConvF(6.80,6.80,6.80);

Med. parameter 835 MHz Brain: $\sigma = 0.90$ mho/m $\epsilon_r = 40.7$ $\rho = 1.00$ g/cm³; Crest factor: 1.0;


SAR (1g): 1.12 mW/g, SAR (10g): 0.654 mW/g

Modottel Phone Model : WTE-320

AMPS Mode, Ch.384[836.52MHz];Standard Battery; Ambient Temp = 22°C/Meas. Tissue Temp. = 21.5°C

Conducted Power = 25.5dBm; Left Head Phantom, Cheek / Touch position; Antenna In

Test Date -- 09 / 04 / 2003 [FCC/OET Bulletin65 - Supplement C, July 2001]

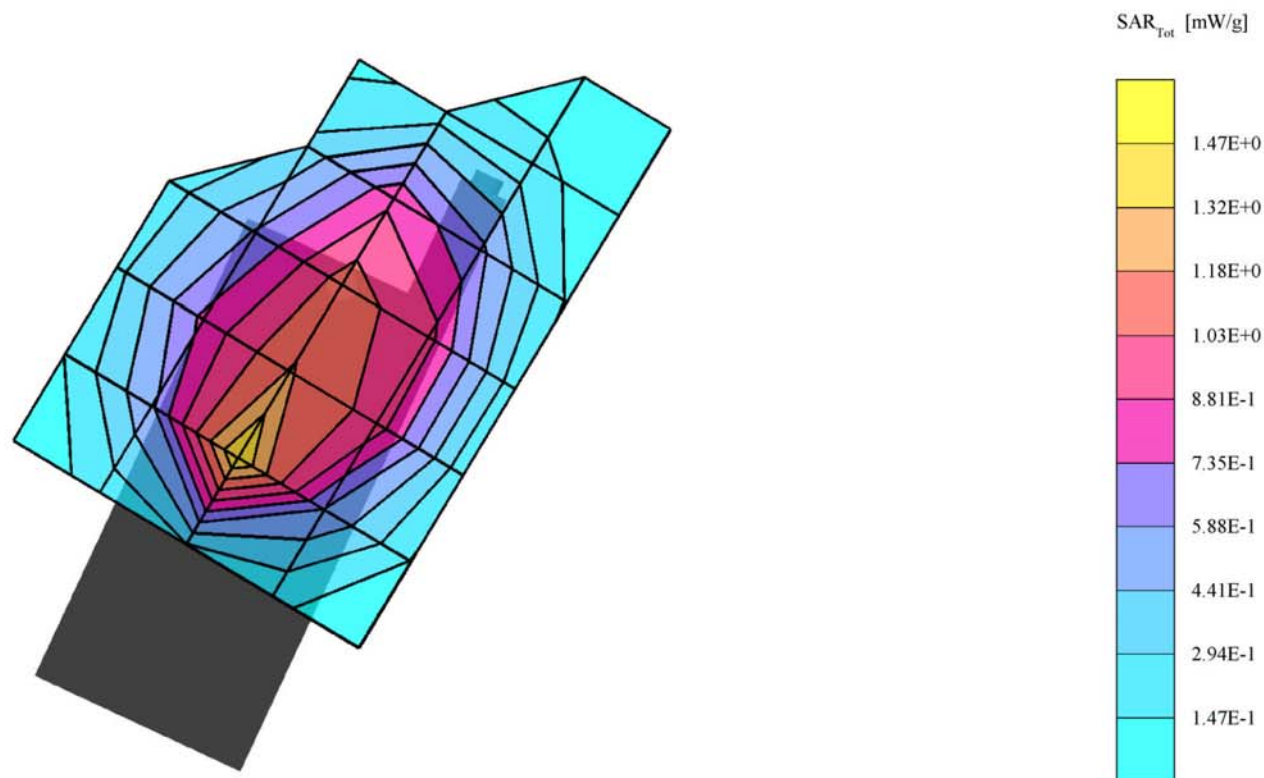

Digital EMC Co.,Ltd

FCC ID : POQWTE-320

MODOTTEL -- WTE-320(Trimode Phone AMPS Head SAR)

SAM(835M) Phantom; Left Hand Section; Probe: ET3DV6 - SN1703; ConvF(6.80,6.80,6.80);

Med. parameter 835 MHz Brain: $\sigma = 0.90$ mho/m $\epsilon_r = 40.7$ $\rho = 1.00$ g/cm³; Crest factor: 1.0;


SAR (1g): 1.17 mW/g, SAR (10g): 0.719 mW/g

Modottel Phone Model : WTE-320


AMPS Mode, Ch.384[836.52MHz];Standard Battery; Ambient Temp = 22.5°C/Meas. Tissue Temp. = 21 °C

Conducted Power = 25.5dBm; Left Head Phantom, Cheek / Touch position; Antenna Out

Test Date -- 09 / 04 / 2003 [FCC/OET Bulletin65 - Supplement C, July 2001]

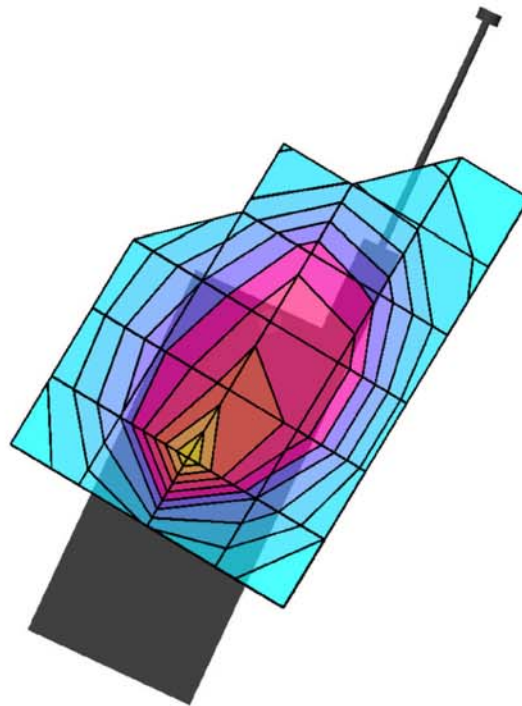

SAR_{Tot} [mW/g]



Digital EMC Co.,Ltd

FCC ID : POQWTE-320

MODOTTEL -- WTE-320(Trimode Phone AMPS Head SAR)

SAM(835M) Phantom; Left Hand Section; Probe: ET3DV6 - SN1703; ConvF(6.80,6.80,6.80);

Med. parameter 835 MHz Brain: $\sigma = 0.90$ mho/m $\epsilon_r = 40.7$ $\rho = 1.00$ g/cm³; Crest factor: 1.0;


SAR (1g): 0.919 mW/g, SAR (10g): 0.593 mW/g

Modotell Phone Model : WTE-320

AMPS Mode, Ch.799[848.97MHz];Standard Battery; Ambient Temp = 22.5°C/Meas. Tissue Temp. = 21°C

Conducted Power = 25.5dBm; Left Head Phantom, Cheek / Touch position; Antenna In

Test Date -- 09 / 04 / 2003 [FCC/OET Bulletin65 - Supplement C, July 2001]

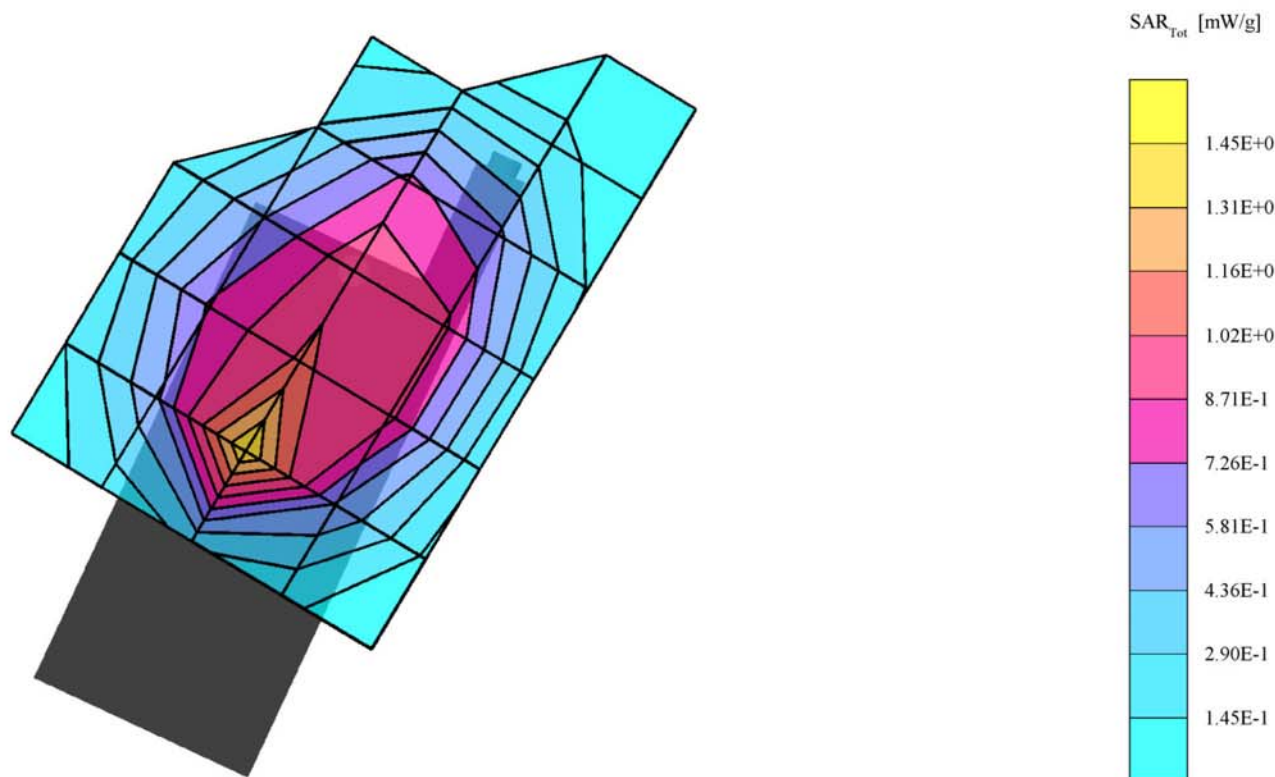

Digital EMC Co.,Ltd

FCC ID : POQWTE-320

MODOTTEL -- WTE-320(Trimode Phone AMPS Head SAR)

SAM(835M) Phantom; Left Hand Section; Probe: ET3DV6 - SN1703; ConvF(6.80,6.80,6.80);

Med. parameter 835 MHz Brain: $\sigma = 0.90$ mho/m $\epsilon_r = 40.7$ $\rho = 1.00$ g/cm³; Crest factor: 1.0;


SAR (1g): 1.35 mW/g, SAR (10g): 0.868 mW/g

Modottel Phone Model : WTE-320


AMPS Mode, Ch.799[848.97MHz];Standard Battery; Ambient Temp = 22.5°C/Meas. Tissue Temp. = 21°C

Conducted Power = 25.5dBm; Left Head Phantom, Cheek / Touch position; Antenna Out

Test Date -- 09 / 04 / 2003 [FCC/OET Bulletin65 - Supplement C, July 2001]

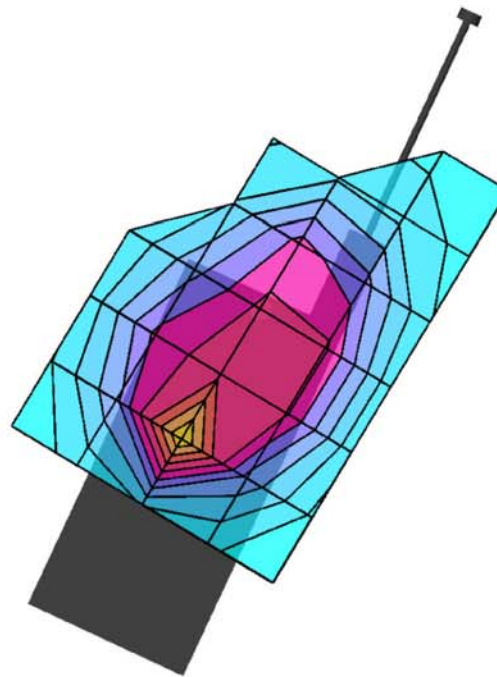

SAR_{Tot} [mW/g]

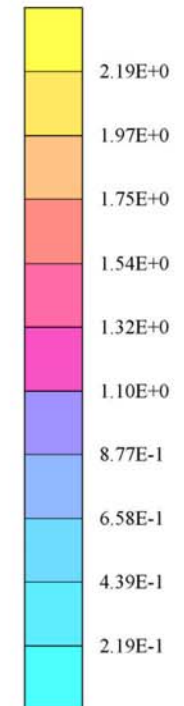

Digital EMC Co.,Ltd

FCC ID : POQWTE-320

MODOTTEL -- WTE-320(Trimode Phone AMPS Head SAR)

SAM(835M) Phantom; Left Hand Section; Probe: ET3DV6 - SN1703; ConvF(6.80,6.80,6.80);

Med. parameter 835 MHz Brain: $\sigma = 0.90$ mho/m $\epsilon_r = 40.7$ $\rho = 1.00$ g/cm³; Crest factor: 1.0;


SAR (1g): 1.16 mW/g, SAR (10g): 0.709 mW/g

Modotell Phone Model : WTE-320

AMPS Mode, Ch.991[824.04MHz];Standard Battery; Ambient Temp = 22.5 °C/Meas. Tissue Temp. = 21 °C

Conducted Power = 25.5dBm; Left Head Phantom, 15° Degree Tilt position; Antenna In

Test Date -- 09 / 04 / 2003 [FCC/OET Bulletin65 - Supplement C, July 2001]

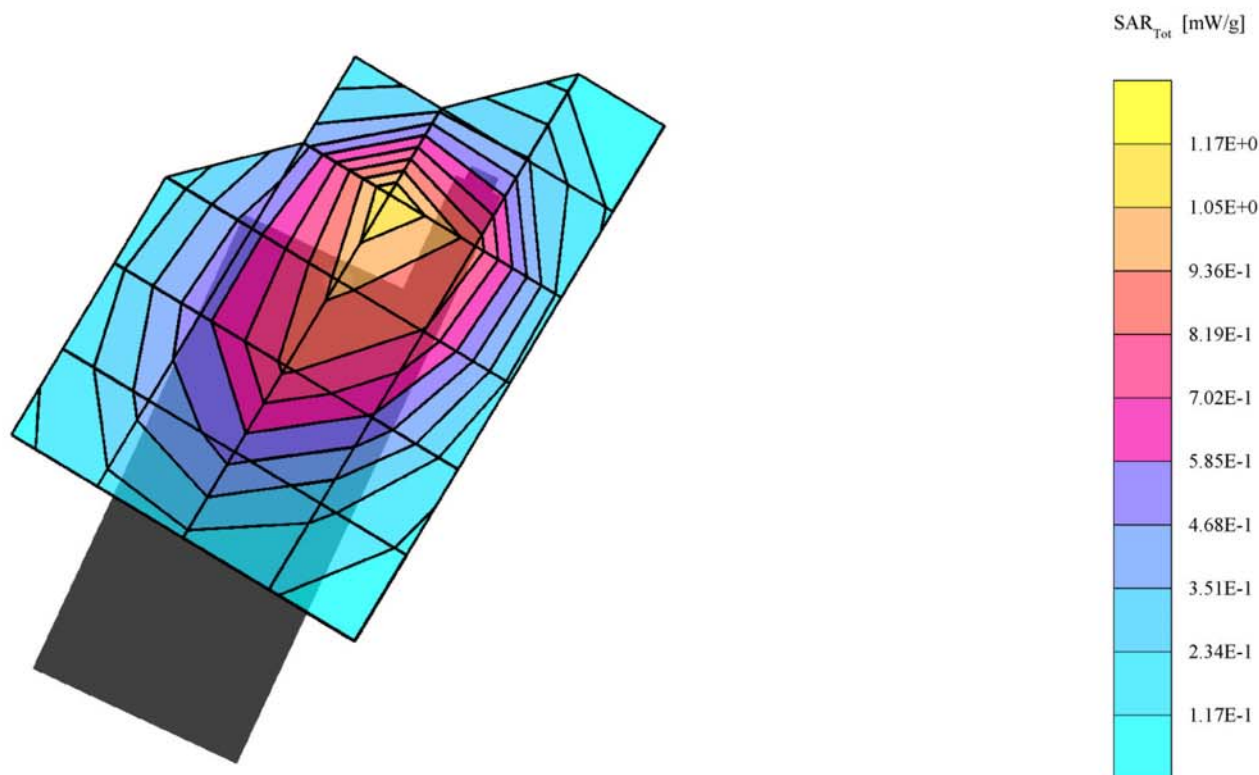

Digital EMC Co.,Ltd

FCC ID : POQWTE-320

MODOTTEL -- WTE-320(Trimode Phone AMPS Head SAR)

SAM(835M) Phantom; Left Hand Section; Probe: ET3DV6 - SN1703; ConvF(6.80,6.80,6.80);

Med. parameter 835 MHz Brain: $\sigma = 0.90$ mho/m $\epsilon_r = 40.7$ $\rho = 1.00$ g/cm³; Crest factor: 1.0;


SAR (1g): 1.42 mW/g, SAR (10g): 0.888 mW/g

Modotell Phone Model : WTE-320

AMPS Mode, Ch.991[824.04MHz];Standard Battery; Ambient Temp = 22.5 °C/Meas. Tissue Temp. = 21 °C

Conducted Power = 25.5dBm; Left Head Phantom, 15° Degree Tilt position; Antenna Out

Test Date -- 09 / 04 / 2003 [FCC/OET Bulletin65 - Supplement C, July 2001]

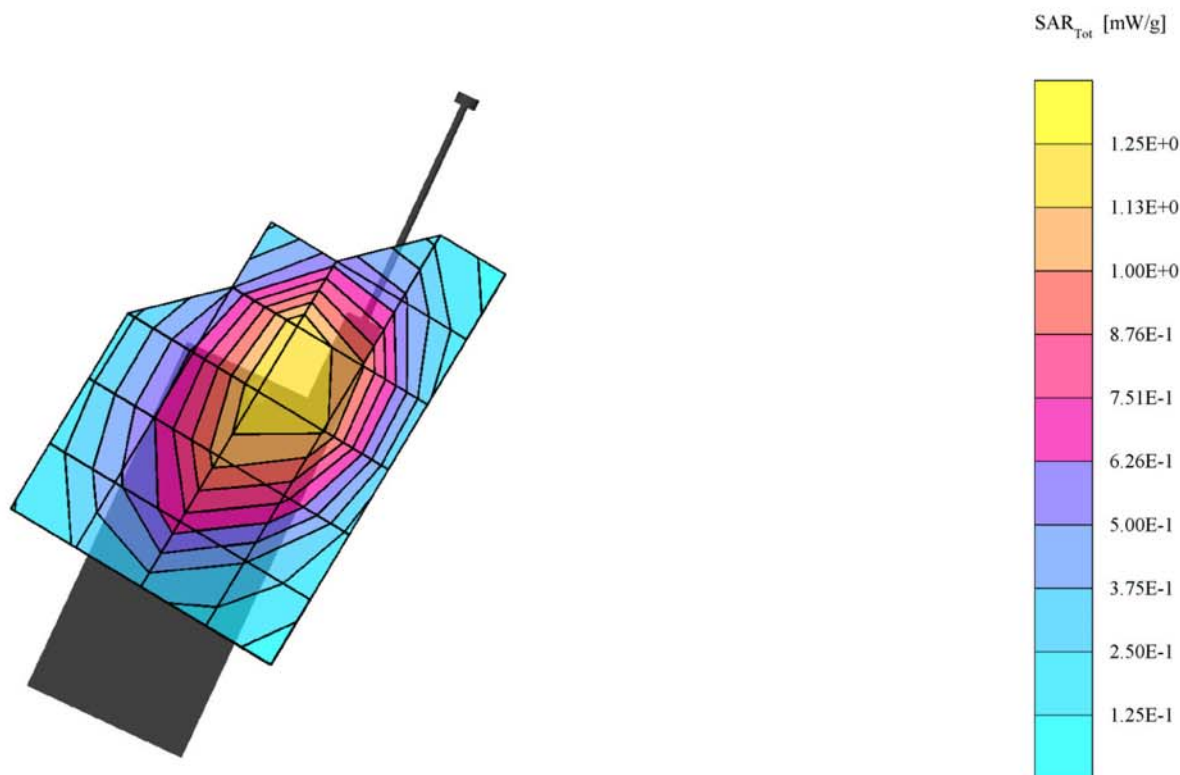

Digital EMC Co.,Ltd

FCC ID : POQWTE-320

MODOTTEL -- WTE-320(Trimode Phone AMPS Head SAR)

SAM(835M) Phantom; Left Hand Section; Probe: ET3DV6 - SN1703; ConvF(6.80,6.80,6.80);

Med. parameter 835 MHz Brain: $\sigma = 0.90$ mho/m $\epsilon_r = 40.7$ $\rho = 1.00$ g/cm³; Crest factor: 1.0;


SAR (1g): 0.915 mW/g, SAR (10g): 0.560 mW/g

Modottel Phone Model : WTE-320

AMPS Mode, Ch.384[836.52MHz];Standard Battery; Ambient Temp = 22.5 °C/Meas. Tissue Temp. = 21 °C

Conducted Power = 25.5dBm; Left Head Phantom, 15° Degree Tilt position; Antenna In

Test Date -- 09 / 04 / 2003 [FCC/OET Bulletin65 - Supplement C, July 2001]

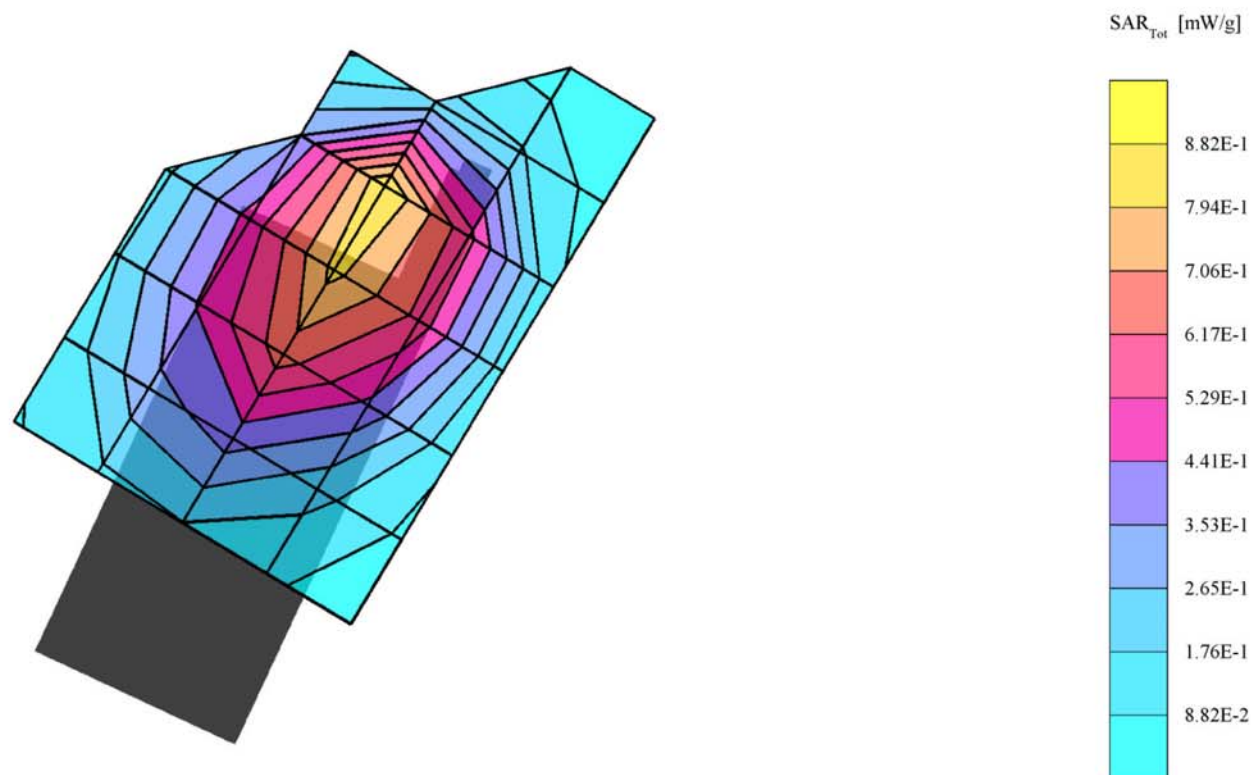

Digital EMC Co.,Ltd

FCC ID : POQWTE-320

MODOTTEL -- WTE-320(Trimode Phone AMPS Head SAR)

SAM(835M) Phantom; Left Hand Section; Probe: ET3DV6 - SN1703; ConvF(6.80,6.80,6.80);

Med. parameter 835 MHz Brain: $\sigma = 0.90$ mho/m $\epsilon_r = 40.7$ $\rho = 1.00$ g/cm³; Crest factor: 1.0;


SAR (1g): 1.23 mW/g, SAR (10g): 0.708 mW/g

Modotell Phone Model : WTE-320

AMPS Mode, Ch.384[836.52MHz];Standard Battery; Ambient Temp = 22.5 °C/Meas. Tissue Temp. = 21 °C

Conducted Power = 25.5dBm; Left Head Phantom,15° Degree Tilt position; Antenna Out

Test Date -- 09 / 04 / 2003 [FCC/OET Bulletin65 - Supplement C, July 2001]

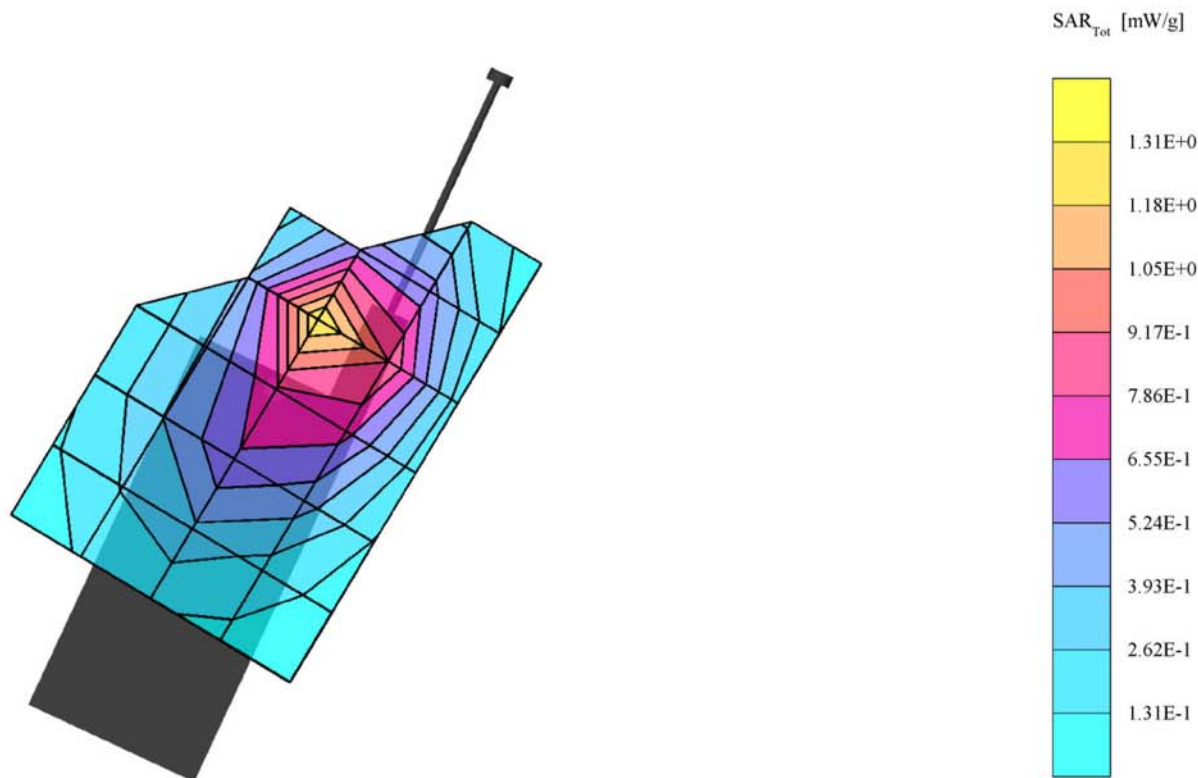

Digital EMC Co.,Ltd

FCC ID : POQWTE-320

MODOTTEL -- WTE-320(Trimode Phone AMPS Head SAR)

SAM(835M) Phantom; Left Hand Section; Probe: ET3DV6 - SN1703; ConvF(6.80,6.80,6.80);

Med. parameter 835 MHz Brain: $\sigma = 0.90$ mho/m $\epsilon_r = 40.7$ $\rho = 1.00$ g/cm³; Crest factor: 1.0;


SAR (1g): 0.951 mW/g, SAR (10g): 0.579 mW/g

Modottel Phone Model : WTE-320

AMPS Mode, Ch.799[848.97MHz];Standard Battery; Ambient Temp = 22.5℃/Meas. Tissue Temp. = 21℃

Conducted Power = 25.5dBm; Left Head Phantom, 15° Degree Tilt position; Antenna In

Test Date -- 09 / 04 / 2003 [FCC/OET Bulletin65 - Supplement C, July 2001]

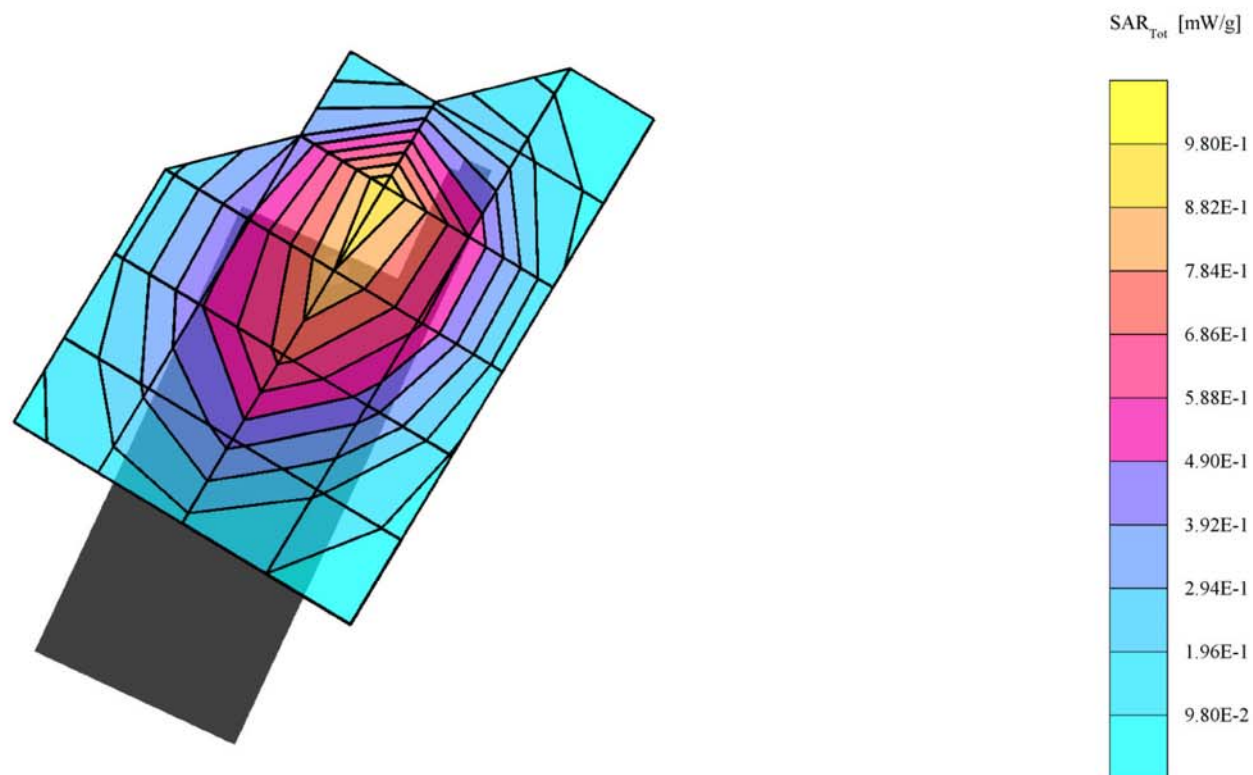

Digital EMC Co.,Ltd

FCC ID : POQWTE-320

MODOTTEL -- WTE-320(Trimode Phone AMPS Head SAR)

SAM(835M) Phantom; Left Hand Section; Probe: ET3DV6 - SN1703; ConvF(6.80,6.80,6.80);

Med. parameter 835 MHz Brain: $\sigma = 0.90$ mho/m $\epsilon_r = 40.7$ $\rho = 1.00$ g/cm³; Crest factor: 1.0;


SAR (1g): 1.35 mW/g, SAR (10g): 0.788 mW/g

Modotell Phone Model : WTE-320


AMPS Mode, Ch.799[848.97MHz];Standard Battery; Ambient Temp = 22.5 °C/Meas. Tissue Temp. = 21 °C

Conducted Power = 25.5dBm; Left Head Phantom, 15° Degree Tilt position; Antenna Out

Test Date -- 09 / 04 / 2003 [FCC/OET Bulletin65 - Supplement C, July 2001]

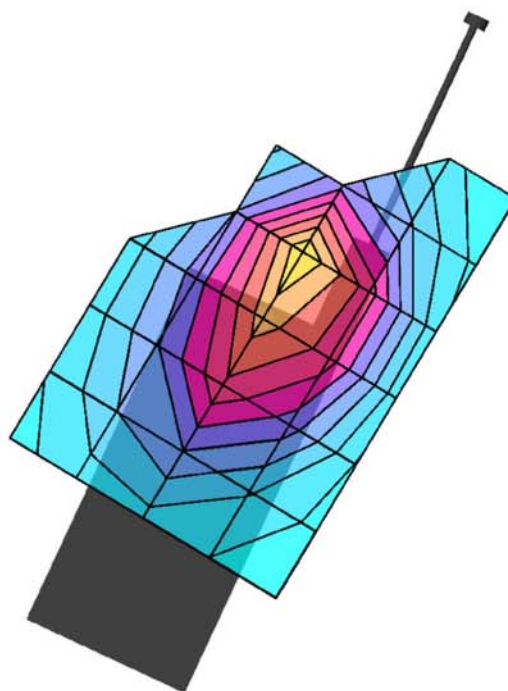

SAR_{Tot} [mW/g]



Digital EMC Co.,Ltd


FCC ID : POQWTE-320

MODOTTEL -- WTE-320(Trimode Phone AMPS Body SAR)

SAM(835M) Phantom; Flat Section; Probe: ET3DV6 - SN1703; ConvF(6.60,6.60,6.60);
Med. parameter 835 MHz Muscle: $\sigma = 0.98$ mho/m $\epsilon_r = 53.4$ $\rho = 1.00$ g/cm³; Crest factor: 1.0;
SAR (1g): 0.709 mW/g, SAR (10g): 0.490 mW/g

MODOTTEL Phone Model : WTE-320

CDMA Mode, Ch.991[824.04MHz]; Standard Battery; Ambient Temp = 23.5°C/Meas. Tissue Temp. = 21°C
Conducted Power = 25.5dBm; Spacing = 1.5cm from Back (antenna side) to flat phantom : Antenna In
Test Date -- 09 / 08 / 2003 [FCC/OET Bulletin65 - Supplement C, July 2001]

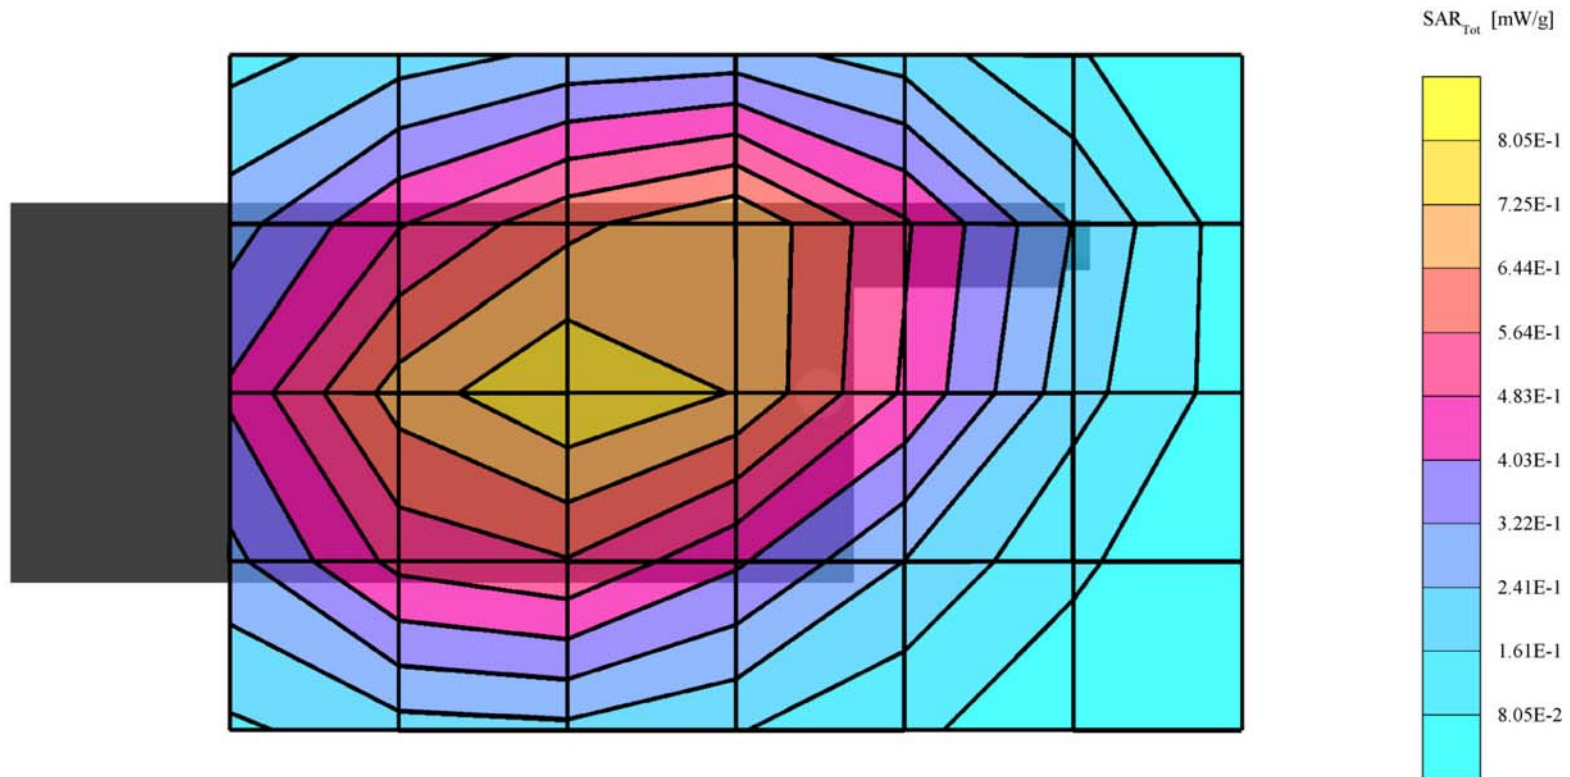

Digital EMC Co.,Ltd


FCC ID : POQWTE-320

MODOTTEL -- WTE-320(Trimode Phone AMPS Body SAR)

SAM(835M) Phantom; Flat Section; Probe: ET3DV6 - SN1703; ConvF(6.60,6.60,6.60);
Med. parameter 835 MHz Muscle: $\sigma = 0.98$ mho/m $\epsilon_r = 53.4$ $\rho = 1.00$ g/cm³; Crest factor: 1.0;
SAR (1g): 0.875 mW/g, SAR (10g): 0.603 mW/g

MODOTTEL Phone Model : WTE-320

CDMA Mode, Ch.991[824.04MHz]; Standard Battery; Ambient Temp = 23.5°C/Meas. Tissue Temp. = 21°C
Conducted Power = 25.5dBm; Spacing = 1.5cm from Back (antenna side) to flat phantom : Antenna Out
Test Date -- 09 / 08 / 2003 [FCC/OET Bulletin65 - Supplement C, July 2001]

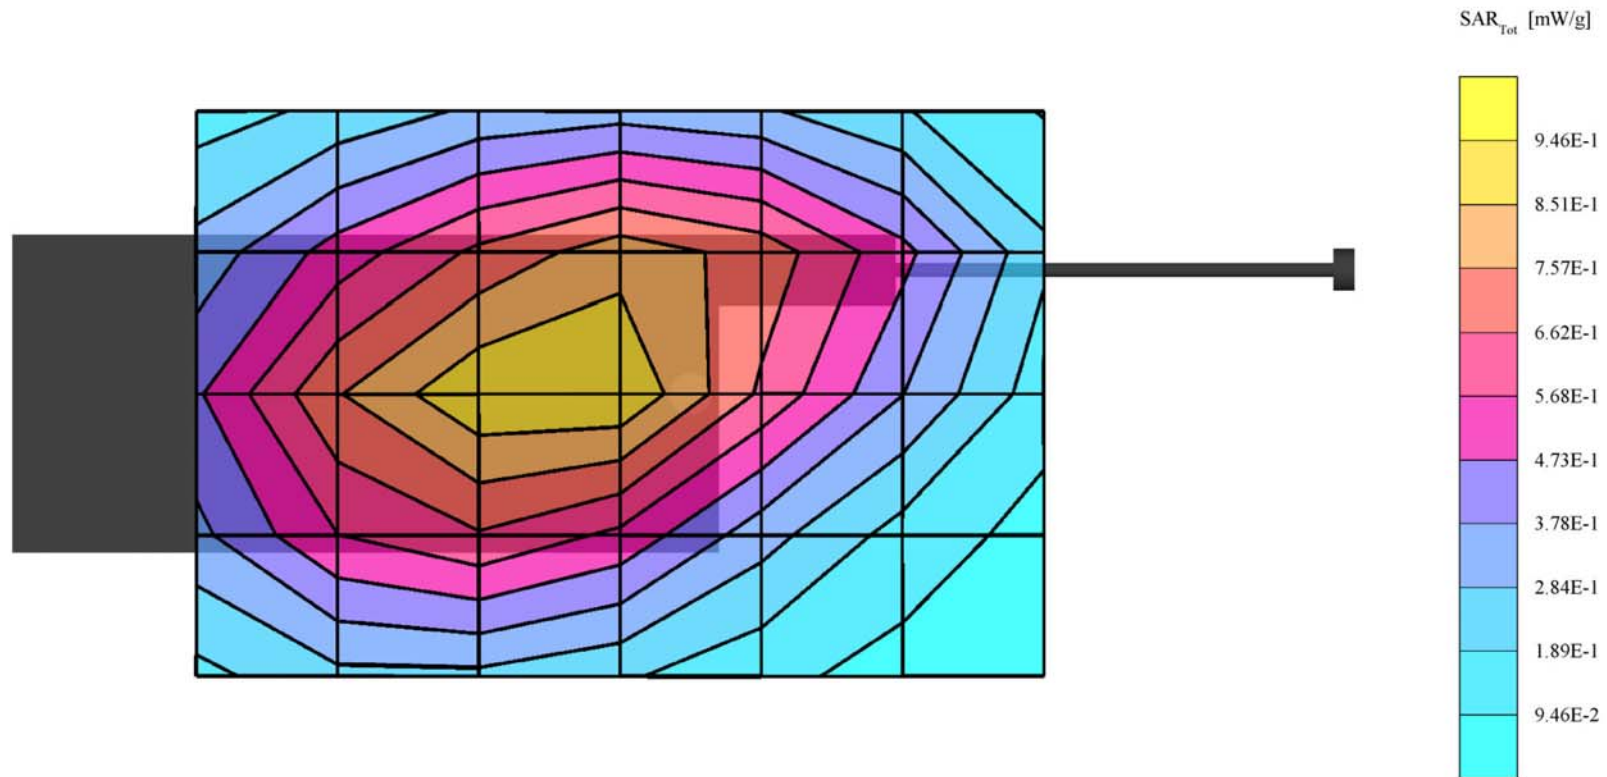

Digital EMC Co.,Ltd


FCC ID : POQWTE-320

MODOTTEL -- WTE-320(Trimode Phone AMPS Body SAR)

SAM(835M) Phantom; Flat Section; Probe: ET3DV6 - SN1703; ConvF(6.60,6.60,6.60);
Med. parameter 835 MHz Muscle: $\sigma = 0.98$ mho/m $\epsilon_r = 53.4$ $\rho = 1.00$ g/cm³; Crest factor: 1.0;
SAR (1g): 0.618 mW/g, SAR (10g): 0.426 mW/g

MODOTTEL Phone Model : WTE-320

CDMA Mode, Ch.384[836.52MHz]; Standard Battery; Ambient Temp = 23.5°C/Meas. Tissue Temp. = 21°C
Conducted Power = 25.5dBm; Spacing = 1.5cm from Back (antenna side) to flat phantom : Antenna In
Test Date -- 09 / 08 / 2003 [FCC/OET Bulletin65 - Supplement C, July 2001]

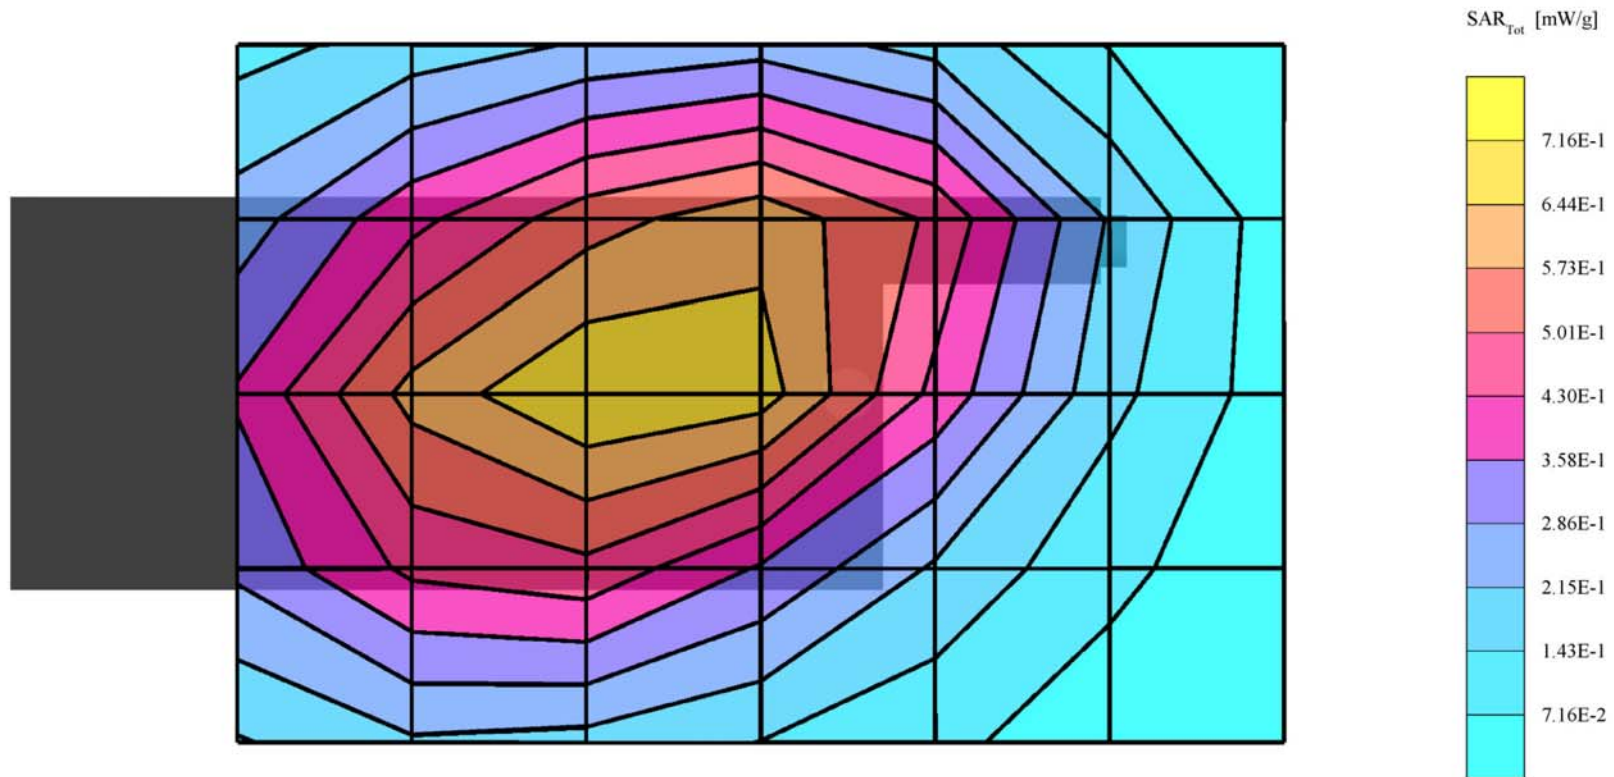

Digital EMC Co.,Ltd


FCC ID : POQWTE-320

MODOTTEL -- WTE-320(Trimode Phone AMPS Body SAR)

SAM(835M) Phantom; Flat Section; Probe: ET3DV6 - SN1703; ConvF(6.60,6.60,6.60);
Med. parameter 835 MHz Muscle: $\sigma = 0.98$ mho/m $\epsilon_r = 53.4$ $\rho = 1.00$ g/cm³; Crest factor: 1.0;
SAR (1g): 0.784 mW/g, SAR (10g): 0.545 mW/g

MODOTTEL Phone Model : WTE-320

CDMA Mode, Ch.384[836.52MHz]; Standard Battery; Ambient Temp = 23.5°C/Meas. Tissue Temp. = 21°C
Conducted Power = 25.5dBm; Spacing = 1.5cm from Back (antenna side) to flat phantom : Antenna Out
Test Date -- 09 / 08 / 2003 [FCC/OET Bulletin65 - Supplement C, July 2001]

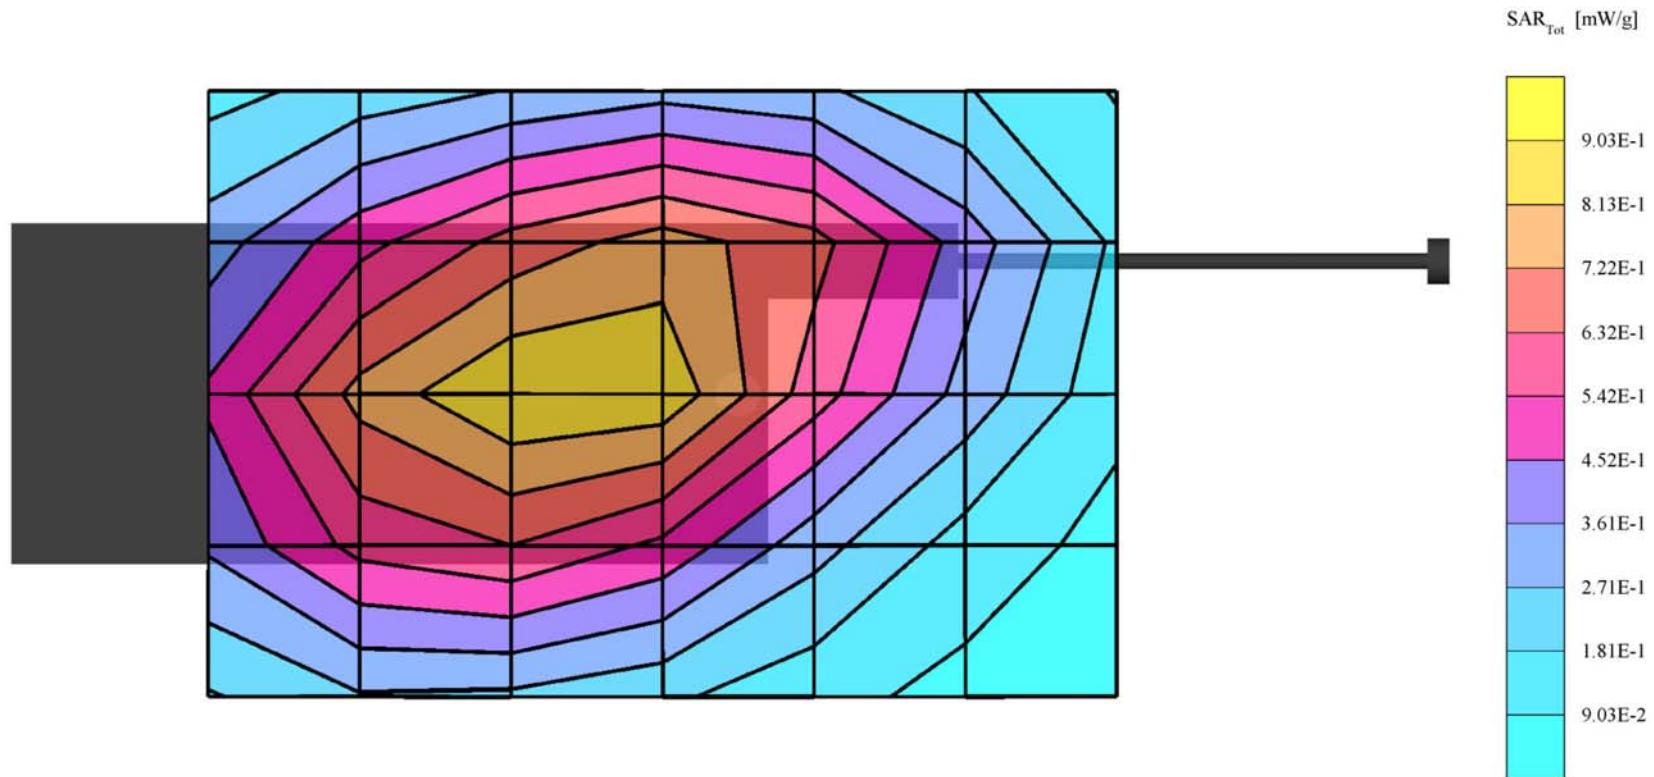

Digital EMC Co.,Ltd


FCC ID : POQWTE-320

MODOTTEL -- WTE-320(Trimode Phone AMPS Body SAR)

SAM(835M) Phantom; Flat Section; Probe: ET3DV6 - SN1703; ConvF(6.60,6.60,6.60);
Med. parameter 835 MHz Muscle: $\sigma = 0.98$ mho/m $\epsilon_r = 53.4$ $\rho = 1.00$ g/cm³; Crest factor: 1.0;
SAR (1g): 0.539 mW/g, SAR (10g): 0.379 mW/g

MODOTTEL Phone Model : WTE-320

CDMA Mode, Ch.799[848.97MHz]; Standard Battery; Ambient Temp = 23.5°C/Meas. Tissue Temp. = 21°C
Conducted Power = 25.5dBm; Spacing = 1.5cm from Back (antenna side) to flat phantom : Antenna In
Test Date -- 09 / 08 / 2003 [FCC/OET Bulletin65 - Supplement C, July 2001]

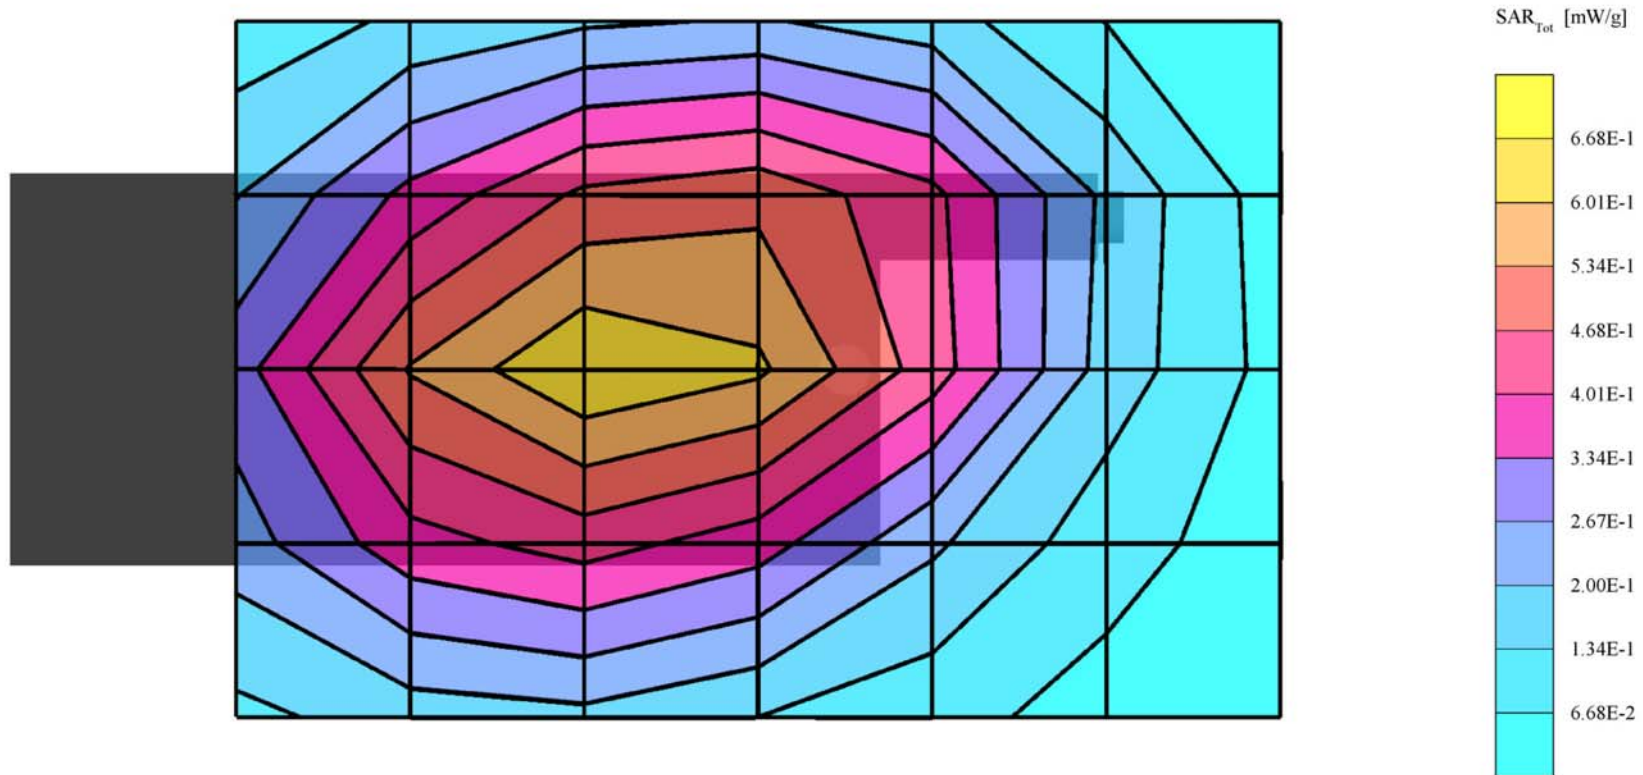

Digital EMC Co.,Ltd


FCC ID : POQWTE-320

MODOTTEL -- WTE-320(Trimode Phone AMPS Body SAR)

SAM(835M) Phantom; Flat Section; Probe: ET3DV6 - SN1703; ConvF(6.60,6.60,6.60);
Med. parameter 835 MHz Muscle: $\sigma = 0.98$ mho/m $\epsilon_r = 53.4$ $\rho = 1.00$ g/cm³; Crest factor: 1.0;
SAR (1g): 0.697 mW/g, SAR (10g): 0.473 mW/g

MODOTTEL Phone Model : WTE-320

CDMA Mode, Ch.799[848.97MHz]; Standard Battery; Ambient Temp = 23.5°C/Meas. Tissue Temp. = 21°C
Conducted Power = 25.5dBm; Spacing = 1.5cm from Back (antenna side) to flat phantom : Antenna Out
Test Date -- 09 / 08 / 2003 [FCC/OET Bulletin65 - Supplement C, July 2001]

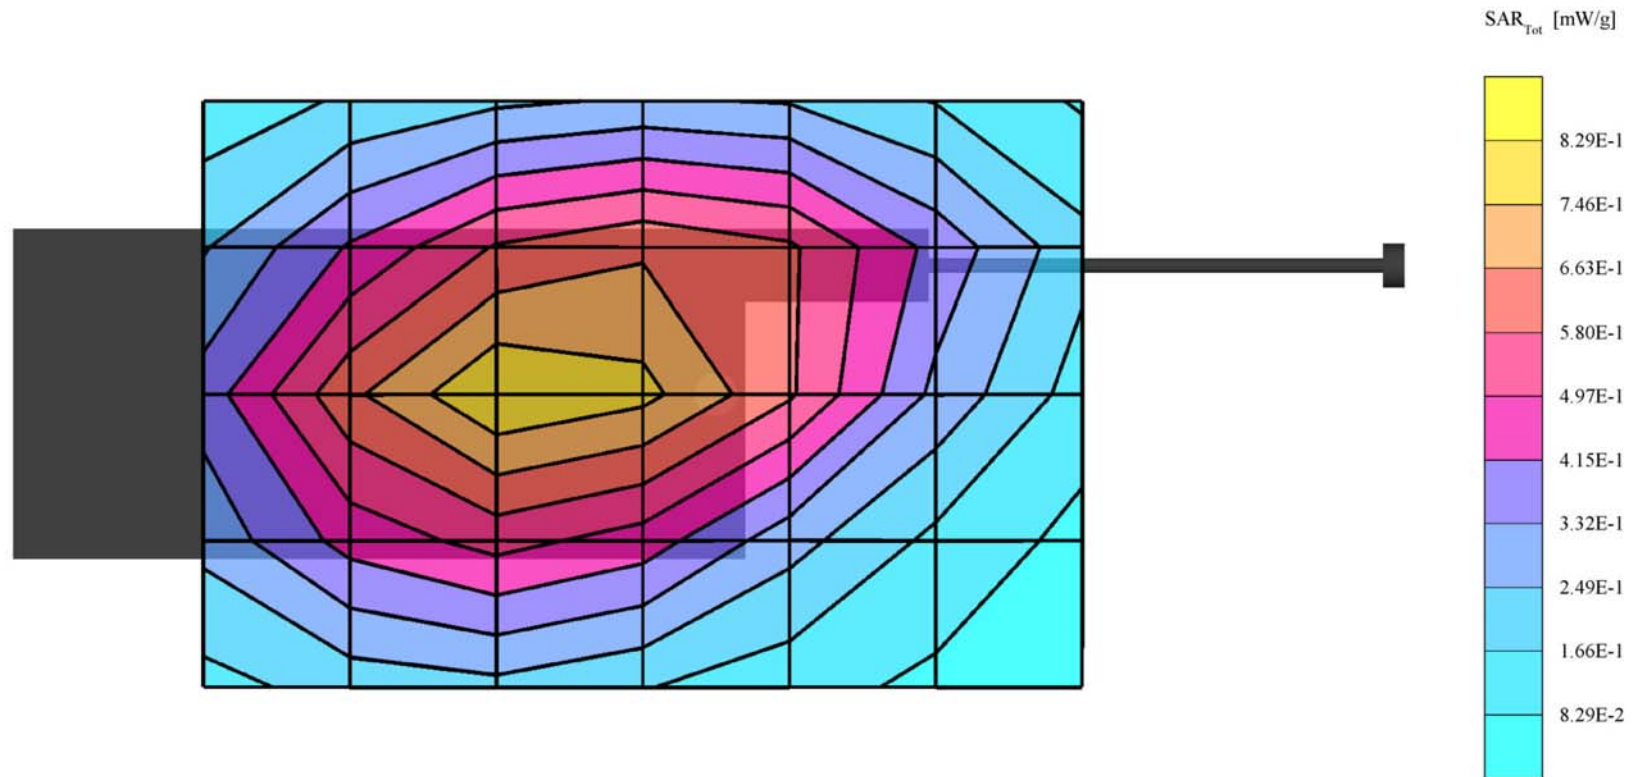

Digital EMC Co.,Ltd


FCC ID : POQWTE-320

MODOTTEL -- WTE-320(Trimode Phone AMPS Head SAR)

SAM(835M) Phantom; Section; Probe: ET3DV6 - SN1703; ConvF(6.80,6.80,6.80);
Med. parameter 835 MHz Brain: $\sigma = 0.90$ mho/m $\epsilon_r = 40.7$ $\rho = 1.00$ g/cm³; Crest factor: 1.0;

Modotell Phone Model : WTE-320

AMPS Mode, Ch.991[824.04MHz];Standard Battery; Ambient Temp = 23 °C/Meas. Tissue Temp. = 22 °C
Conducted Power = 25.5dbm; Right Head Phantom, Cheek / Touch position; Antenna Out
Test Date -- 09 / 05 / 2003 [FCC/OET Bulletin65 - Supplement C, July 2001]

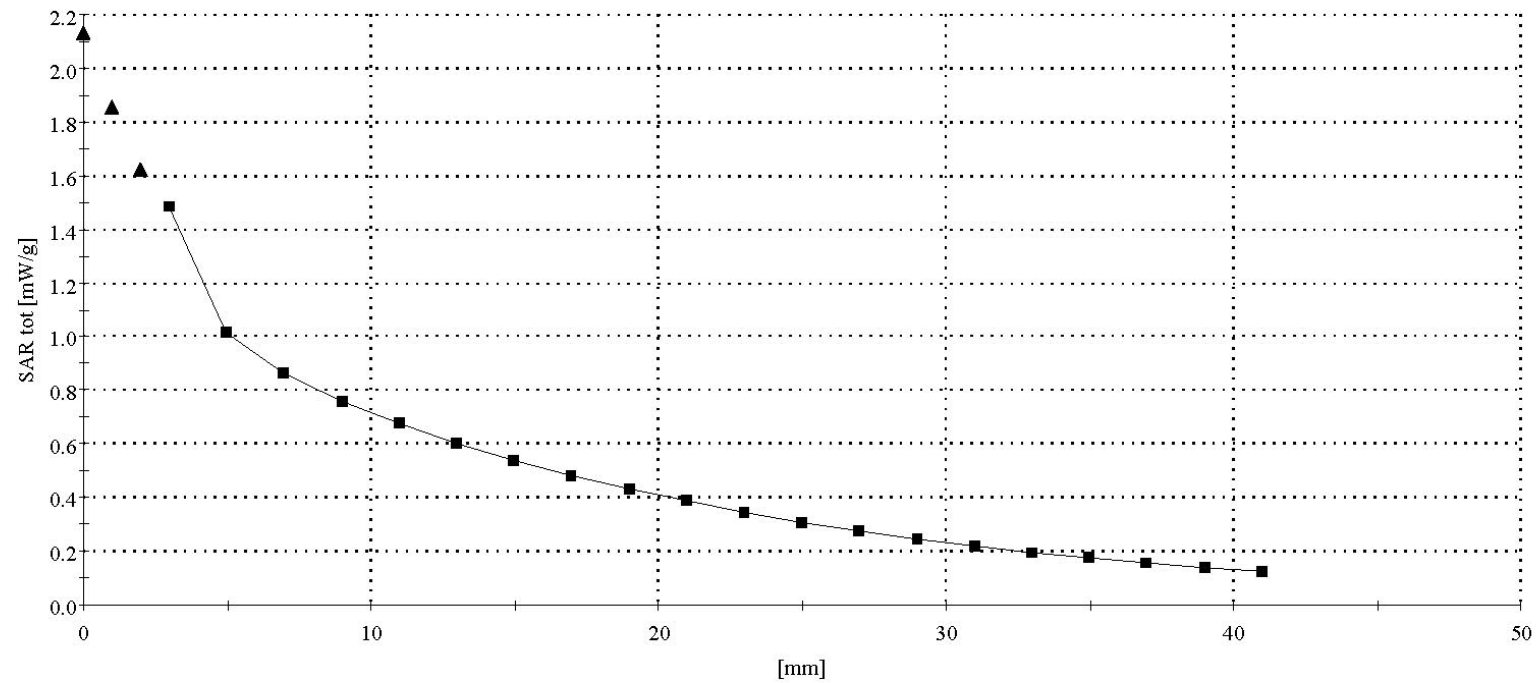

Digital EMC Co.,Ltd

FCC ID : POQWTE-320

MODOTTEL -- WTE-320(Trimode Phone AMPS Head SAR)


SAM(835M) Phantom; Section; Probe: ET3DV6 - SN1703; ConvF(6.80,6.80,6.80);
Med. parameter 835 MHz Brain: $\sigma = 0.90$ mho/m $\epsilon_r = 40.7$ $\rho = 1.00$ g/cm³; Crest factor: 1.0;

Modotell Phone Model : WTE-320

AMPS Mode, Ch.991[824.04MHz];Standard Battery; Ambient Temp = 23 °C/Meas. Tissue Temp. = 22 °C

Conducted Power = 25.5dBm; Left Head Phantom, 15° Degree Tilt position; Antenna Out

Test Date -- 09 / 04 / 2003 [FCC/OET Bulletin65 - Supplement C, July 2001]

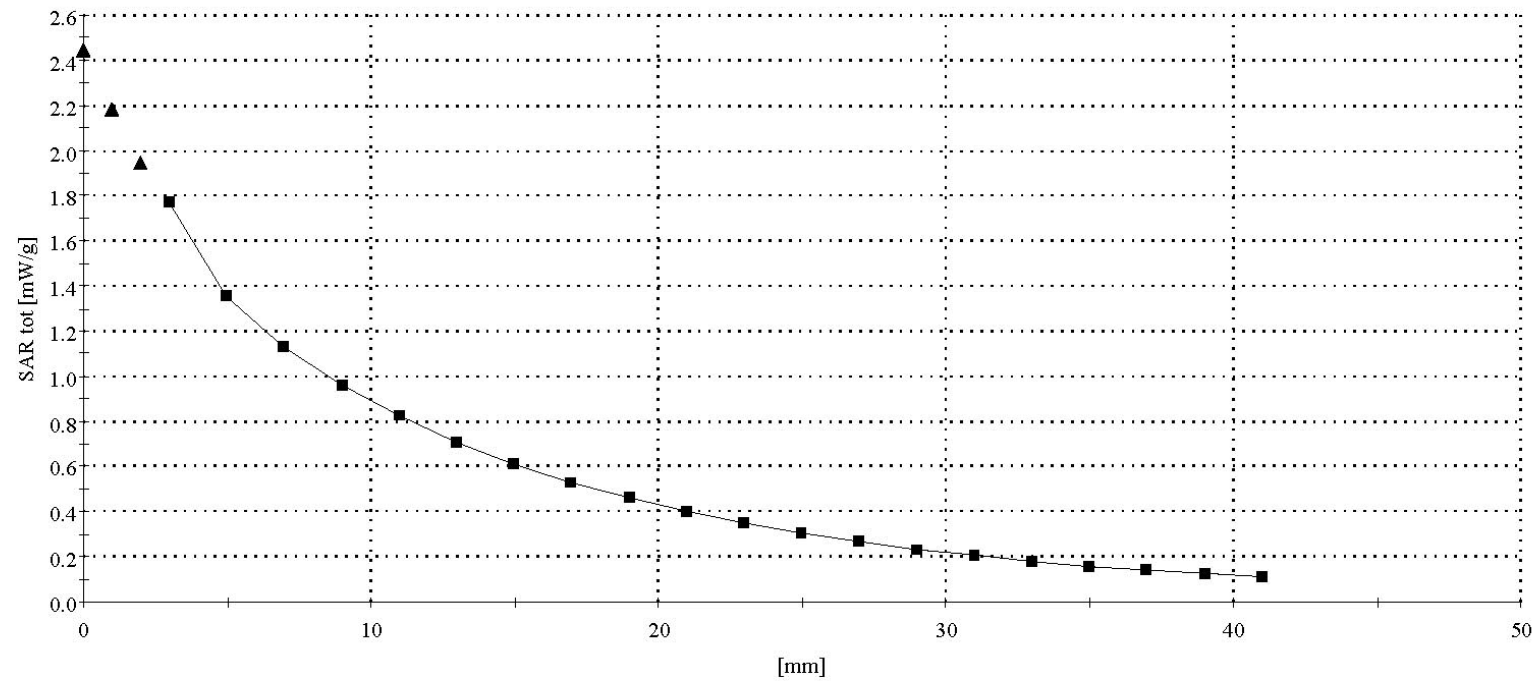


Digital EMC Co.,Ltd

FCC ID : POQWTE-320

MODOTTEL -- WTE-320(Trimode Phone AMPS Body SAR)

SAM(835M) Phantom; Section; Probe: ET3DV6 - SN1703; ConvF(6.60,6.60,6.60);
Med. parameter 835 MHz Muscle: $\sigma = 0.98$ mho/m $\epsilon_r = 53.4$ $\rho = 1.00$ g/cm³; Crest factor: 1.0;

MODOTTEL Phone Model : WTE-320
CDMA Mode, Ch.991[824.04MHz]; Standard Battery; Ambient Temp = 23 °C/Meas. Tissue Temp. = 21 °C
Conducted Power = 25.5dBm; Spacing = 1.5cm from Back (antenna side) to flat phantom : Antenna Out
Test Date -- 09 / 08 / 2003 [FCC/OET Bulletin65 - Supplement C, July 2001]

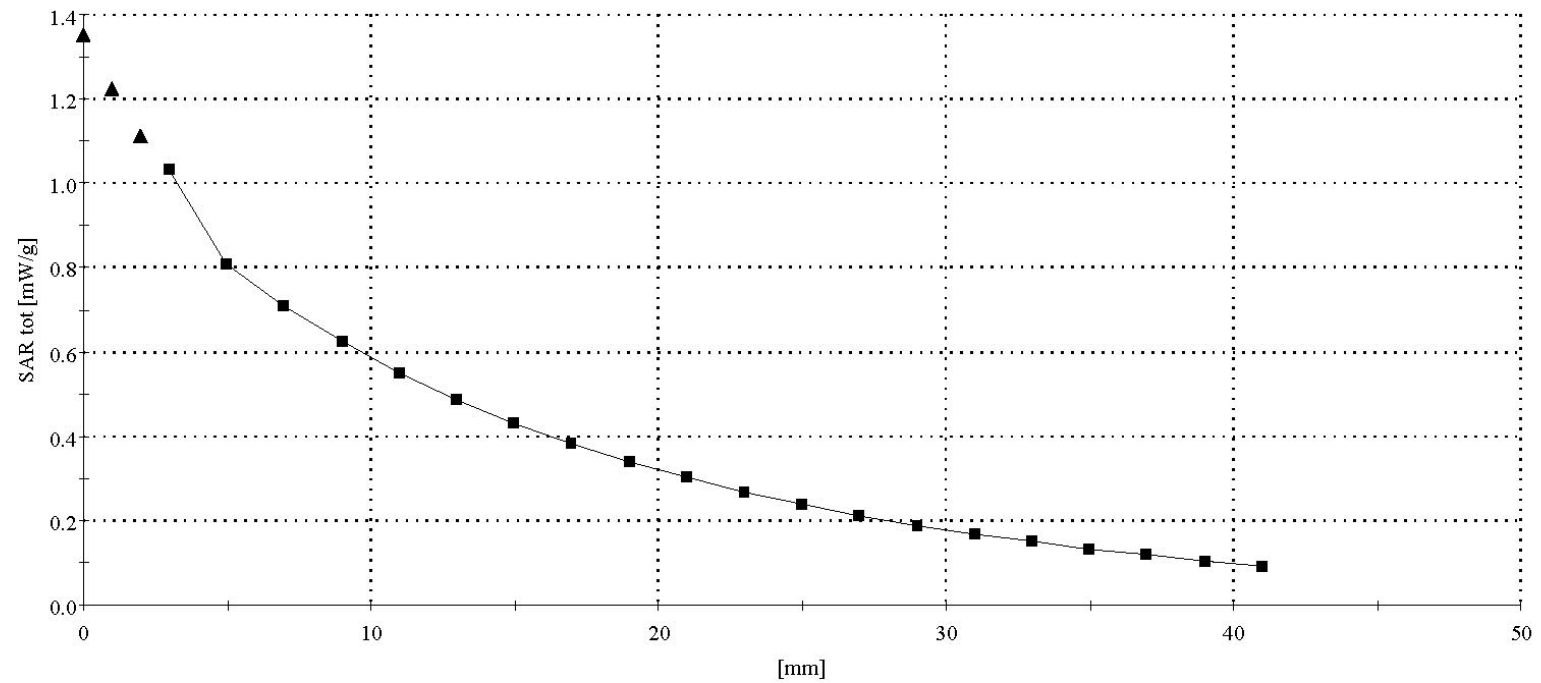

Digital EMC Co.,Ltd

FCC ID : POQWTE-320