




Appendix B

RF Power Output




Marker 1 [T1] RBW 3 MHz RF Att 60 dB
Ref Lvl 30.65 dBm VBW 3 MHz
37 dBm 1.85009018 GHz SWT 5 ms Unit dBm

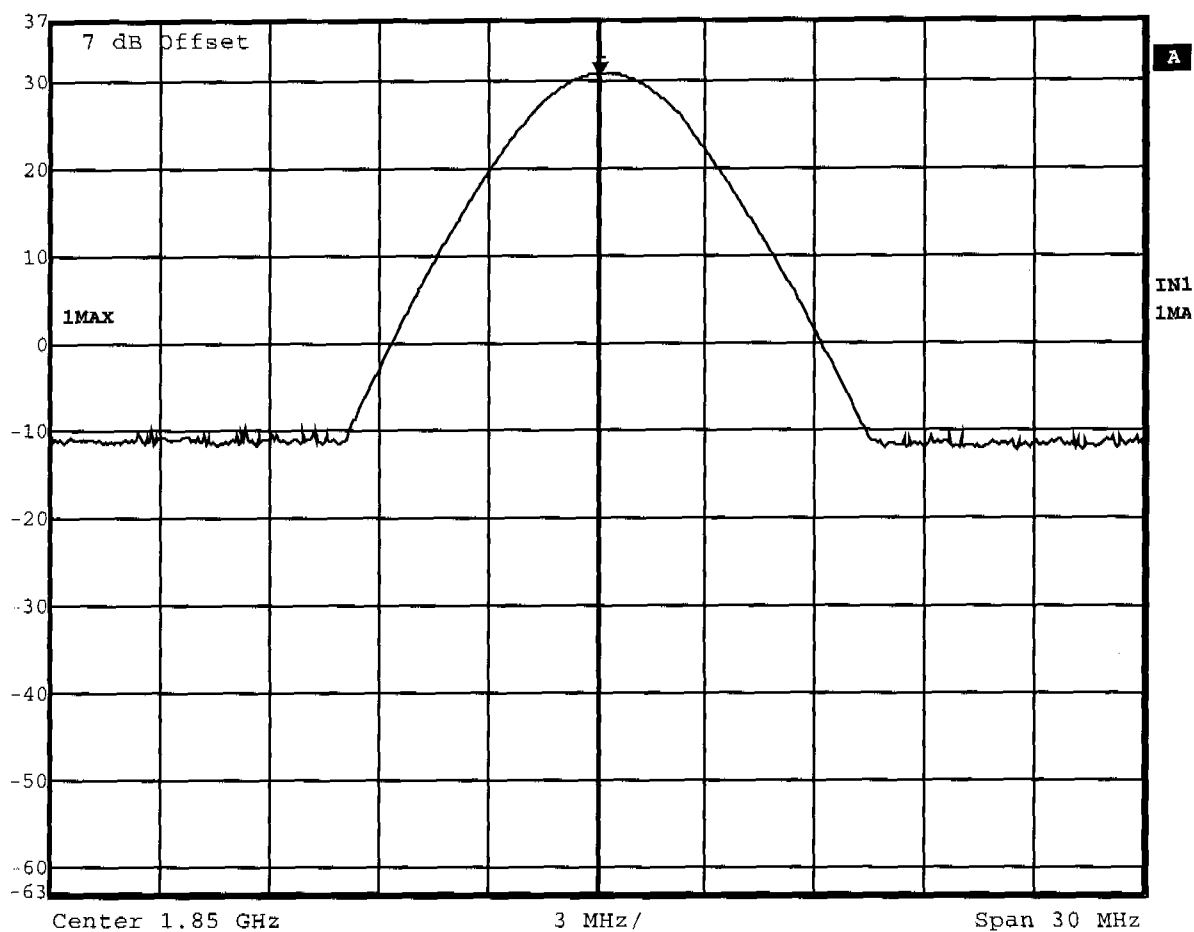

Title: Model : EB-G60U
Comment A: Output power conducted channel 512
Date: 10.Feb.2003 14:56:46




Marker 1 [T1] RBW 3 MHz RF Att 60 dB
Ref Lvl 31.18 dBm VBW 3 MHz
37 dBm 1.88009018 GHz SWT 5 ms Unit dBm

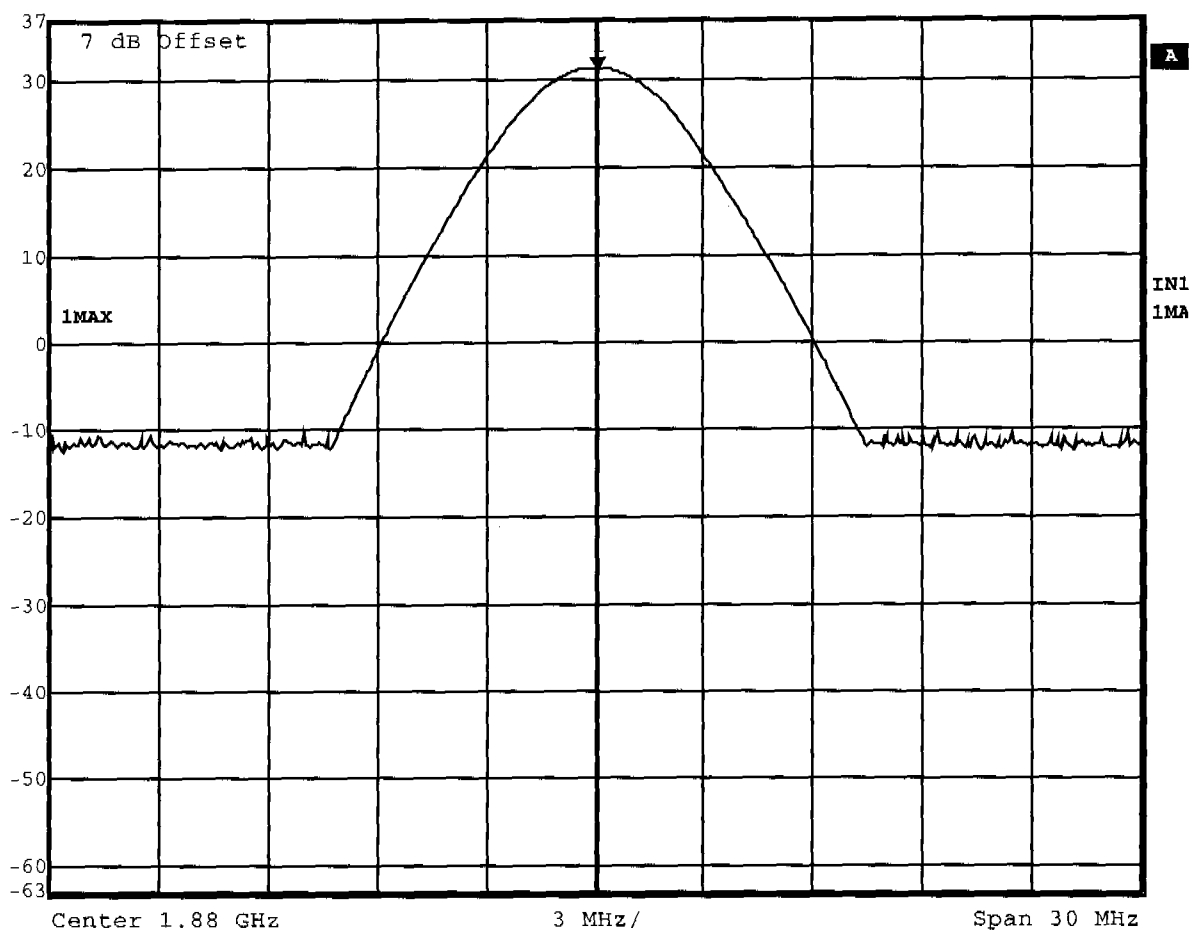

Title: Model : EB-G60U
Comment A: Output power conducted channel 661
Date: 10.Feb.2003 15:01:52



Marker 1 [T1] RBW 3 MHz RF Att 60 dB
Ref Lvl 31.16 dBm VBW 3 MHz
37 dBm 1.90987054 GHz SWT 5 ms Unit dBm

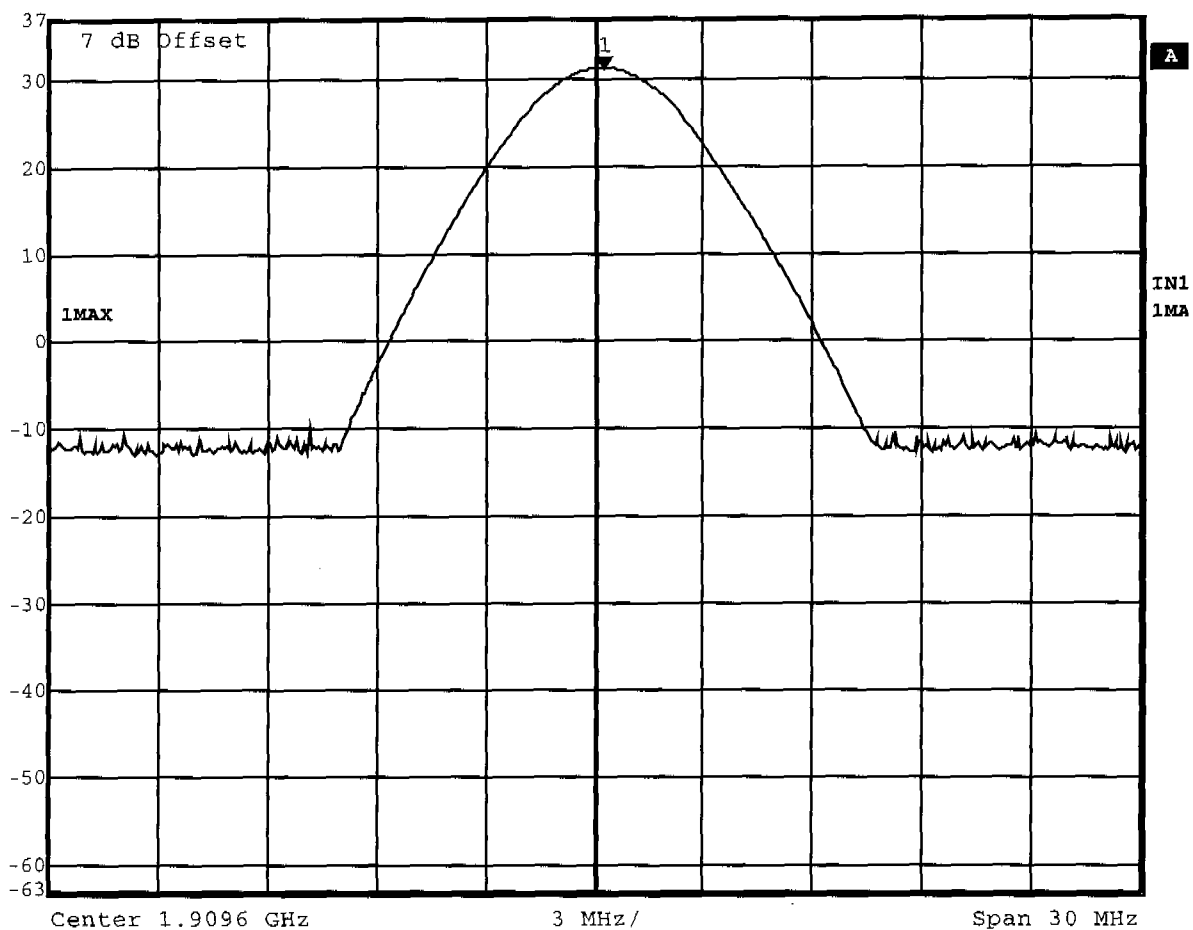


Title: Model : EB-G60U
Comment A: Output power conducted channel 810
Date: 10.Feb.2003 15:04:18



Ref Lvl
36 dBm

Marker 1 [T1]
31.70 dBm
834.23006012 MHz

RBW 3 MHz RF Att 60 dB
VBW 3 MHz
SWT 5 ms Unit dBm

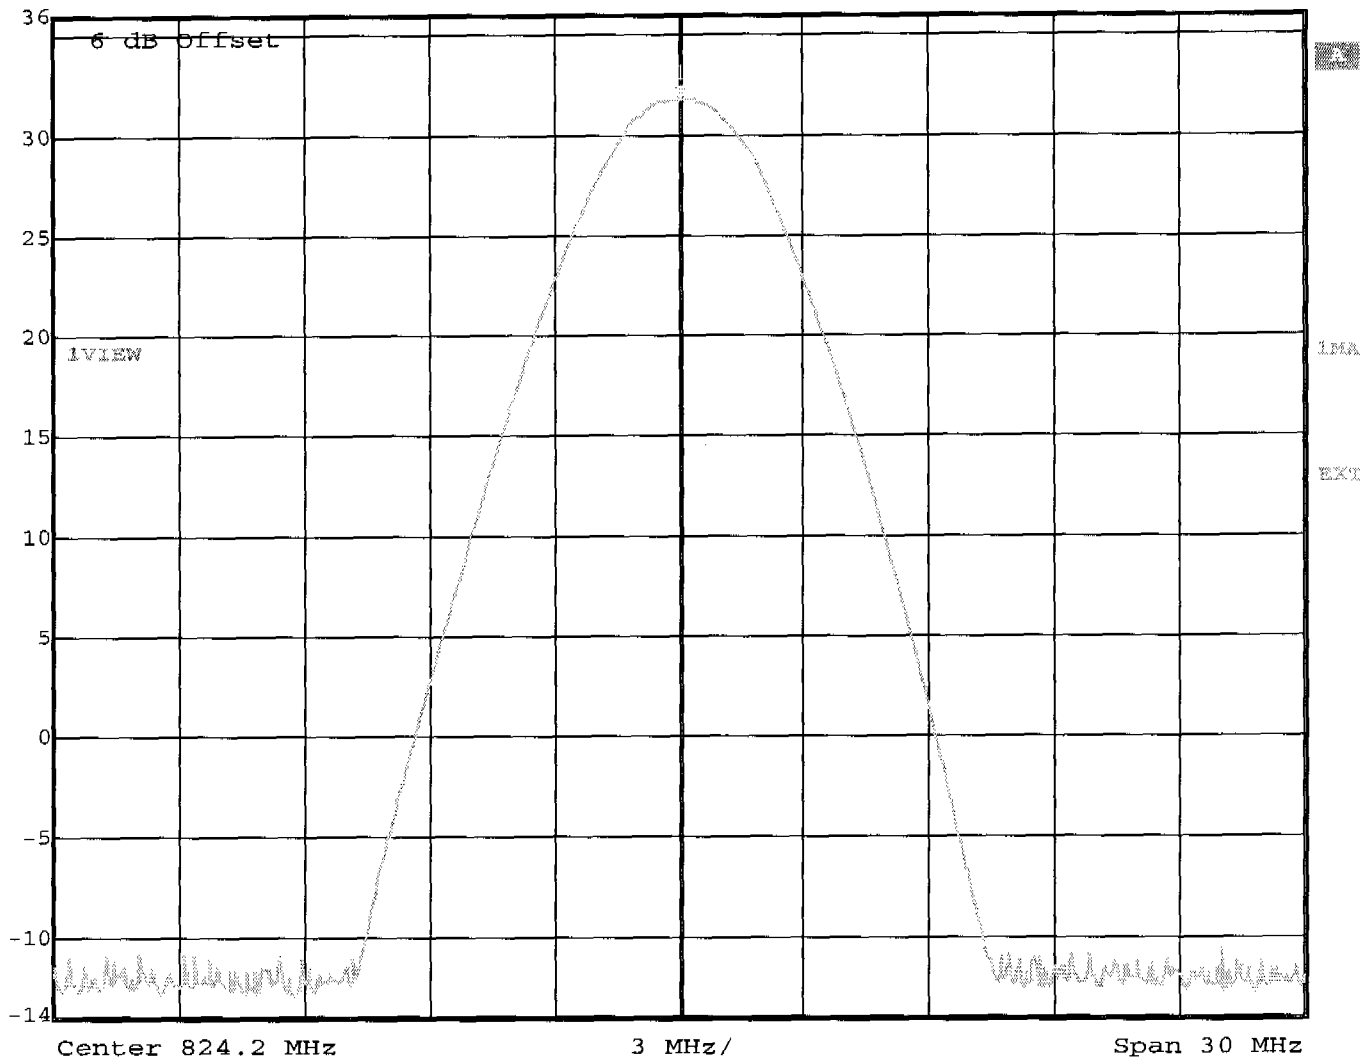

Title: Model: EB-G60U
Comment A: Output Power Conducted Channel 128
Date: 7.MAR.2003 10:05:10



Ref Lvl

36 dBm

Marker 1 (77)

31.11 dBm

836.36993999 MHz

RBW

3 MHz

VBW

3 MHz

SWT


5 ms

RF Att

60 dB

Unit

dBm

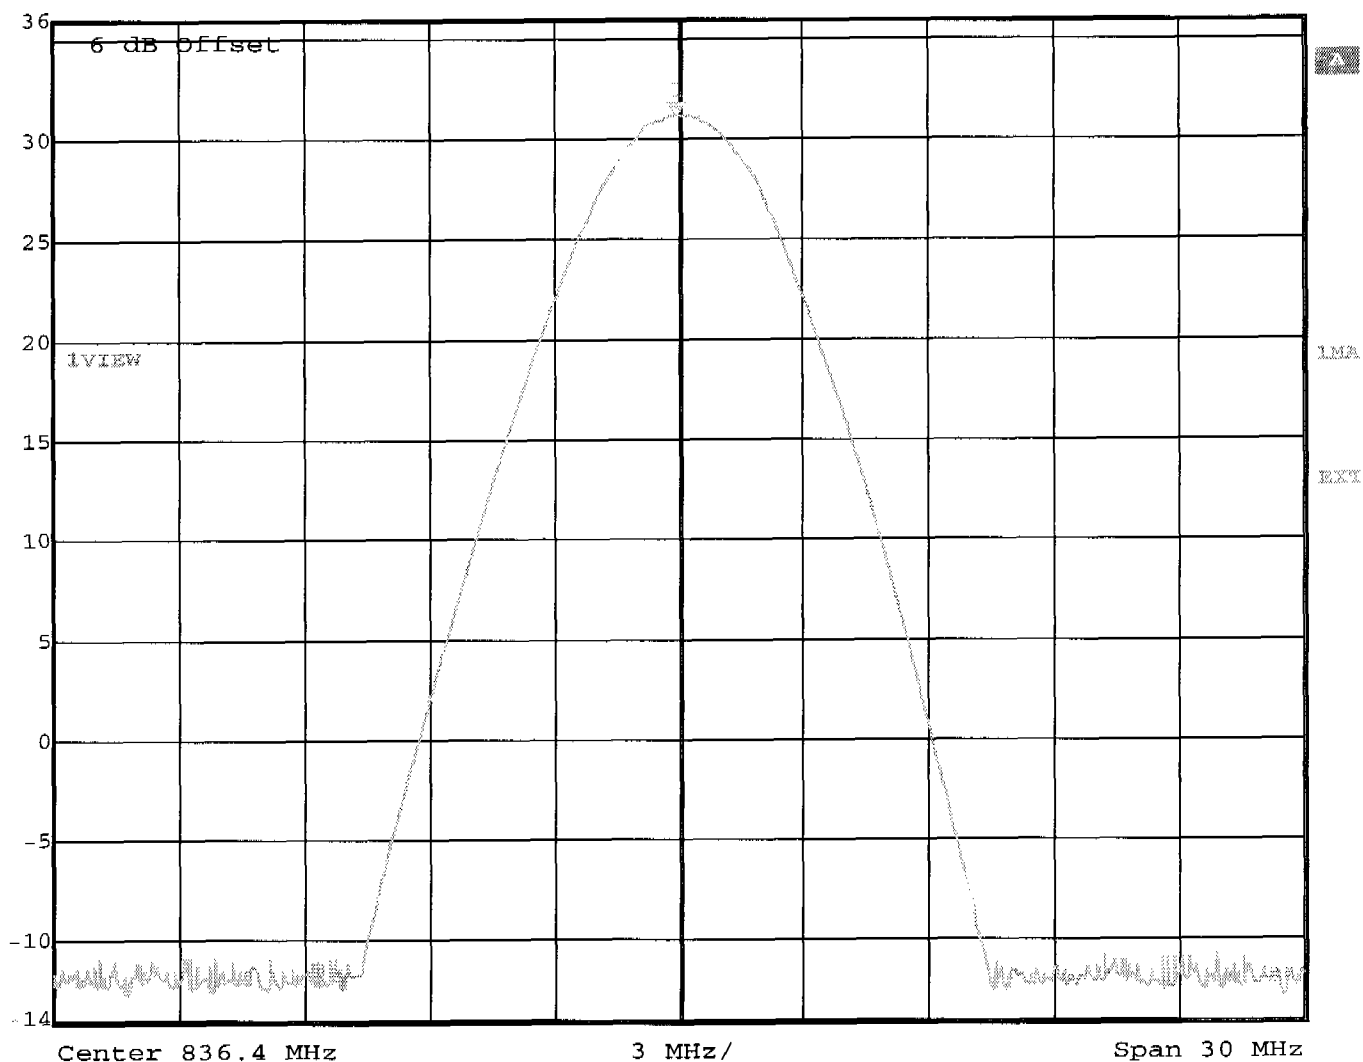

Title: Model: EB-G60U

Comment A: Output Power Conducted Channel 189

Date: 7.MAR.2003 10:01:52



Ref Lvl

Marker 1 [T1]

RBW

3 MHz

RF Att

60 dB

36 dBm

31.30 dBm

VBW

3 MHz


848.70981954 MHz

SWT

5 ms

Unit

dBm

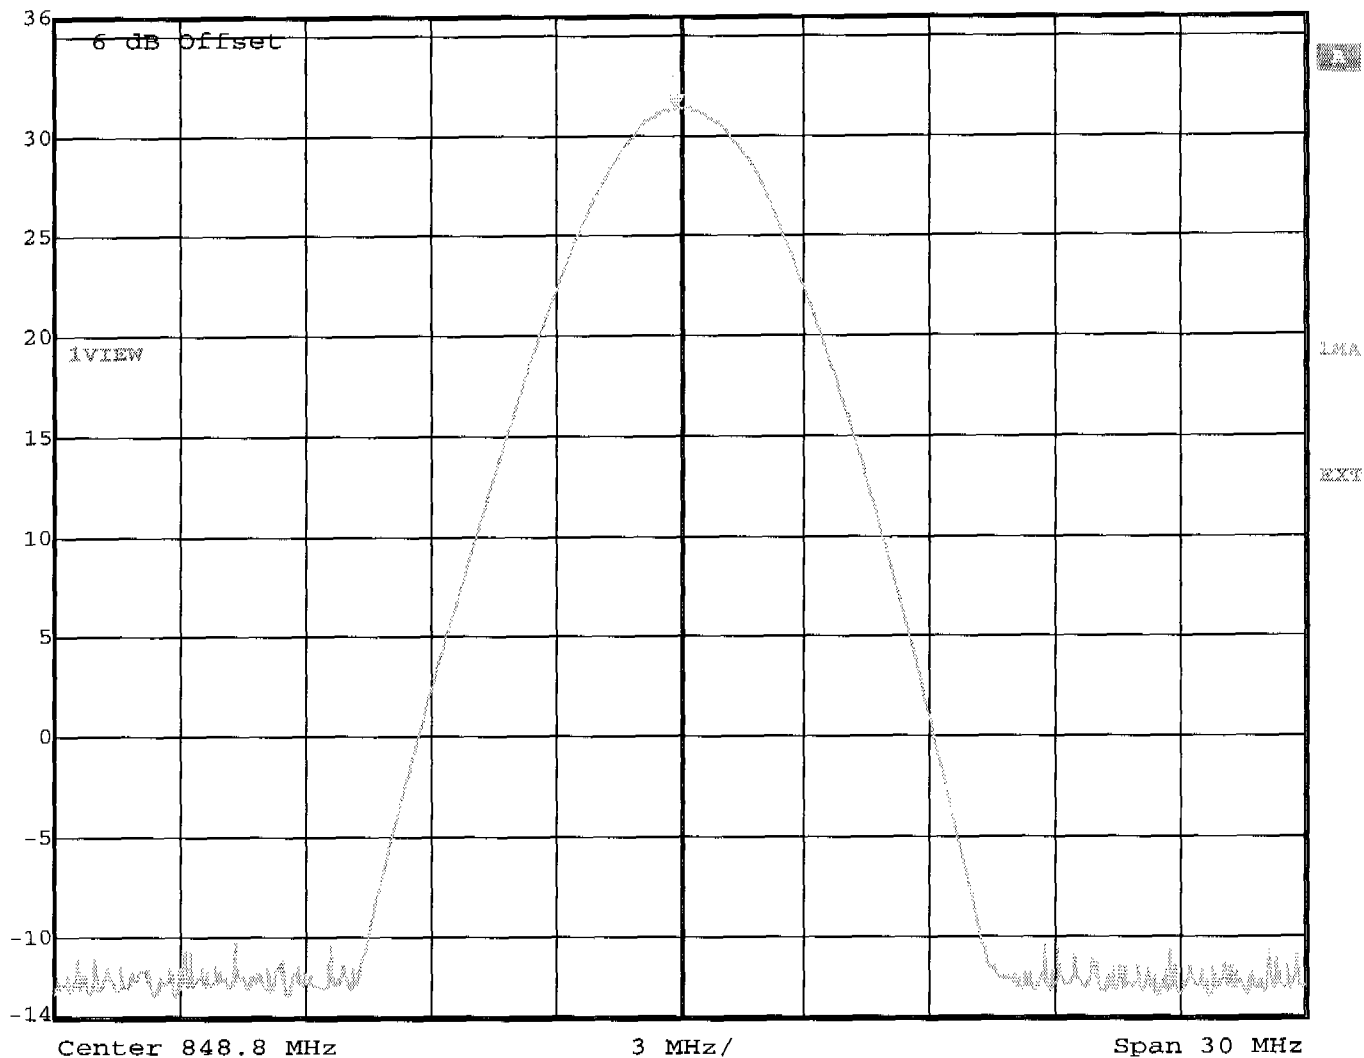

Title: Model: EB-G60U

Comment A: Output Power Conducted Channel 251


Date: 7.MAR.2003 10:06:27

Appendix C

ERP, EIRP


**Equivalent Isotropically Radiated Power
FCC RULES PART 24 SUBPART E**

EUT / Model: GPRS Dual Band Handset / EB-G60U
Channel: 512
Approval Holder: Compal Communications Inc.
Test Site / Operator: ETS / Mr. F.Schulz
Temperature/ Voltage: 23°C / Unom. : 3.8 VDC
Test Specification: according to §24.232
Comment 1: Dist.: 3m, Ant.: HL025,PCL 0
Comment 2: Freq: 1.850GHz, Pmax: 27.89dBm, RBW: 3MHz

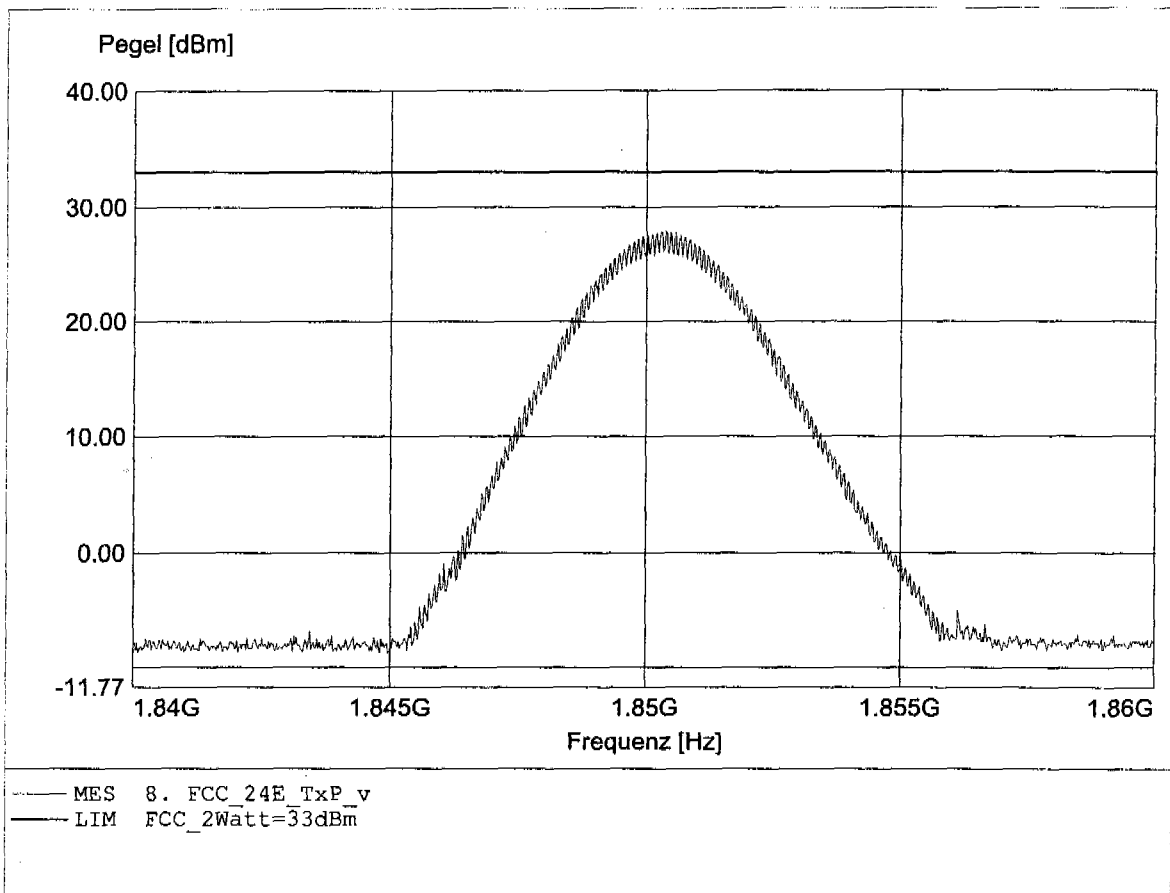


**Equivalent Isotropically Radiated Power
FCC RULES PART 24 SUBPART E**

EUT / Model: GPRS Dual Band Handset / EB-G60U
Channel: 512
Approval Holder: Compal Communications Inc.
Test Site / Operator: ETS / Mr. F.Schulz
Temperature/ Voltage: 23°C / Unom. : 3.8 VDC
Test Specification: according to §24.232
Comment 1: Dist.: 3m, Ant.: HL025, PCL 0
Comment 2: Freq: 1.850GHz, Pmax: 29.20dBm, RBW: 3MHz

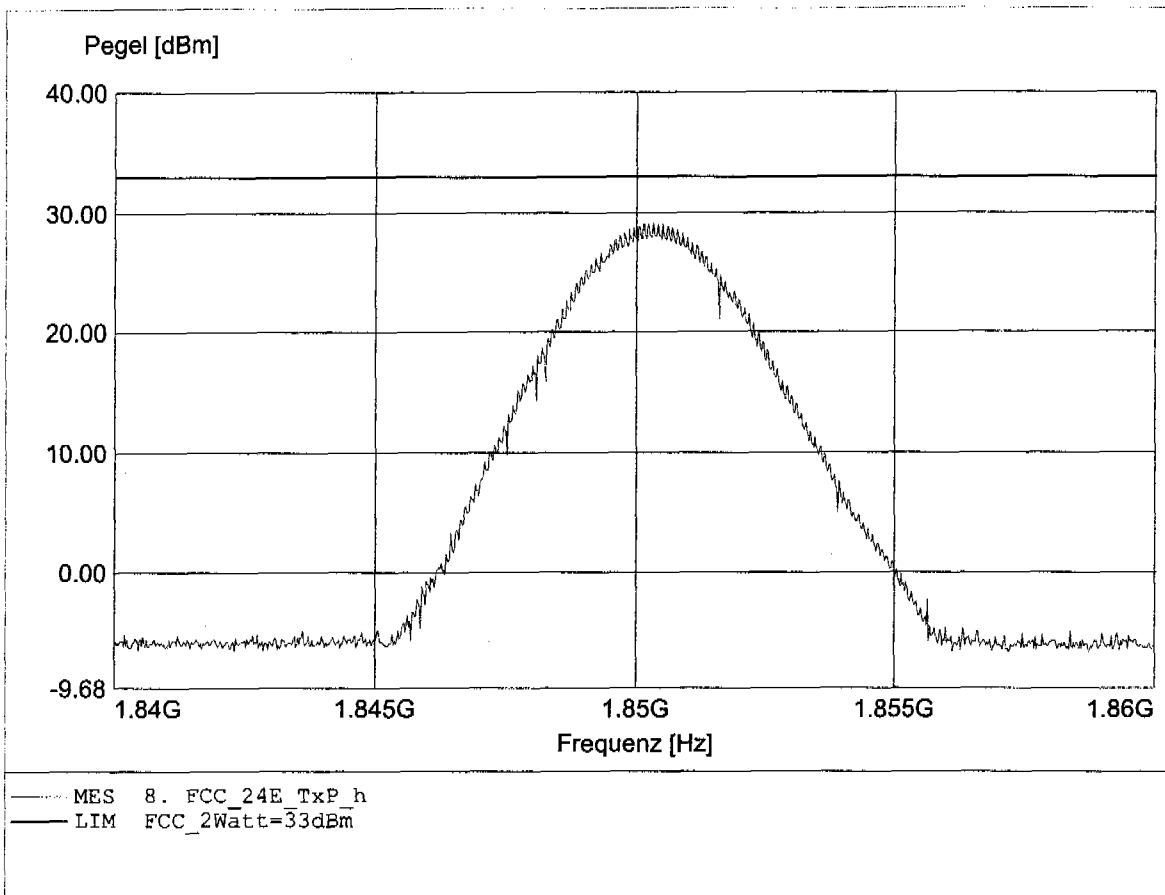


**Equivalent Isotropically Radiated Power
FCC RULES PART 24 SUBPART E**

EUT / Model: GPRS Dual Band Handset / EB-G60U
Channel: 661
Approval Holder: Compal Communications Inc.
Test Site / Operator: ETS / Mr. F.Schulz
Temperature/ Voltage: 23°C / Unom. : 3.8 VDC
Test Specification: according to §24.232
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq: 1.880GHz, Pmax: 27.41dBm, RBW: 3MHz

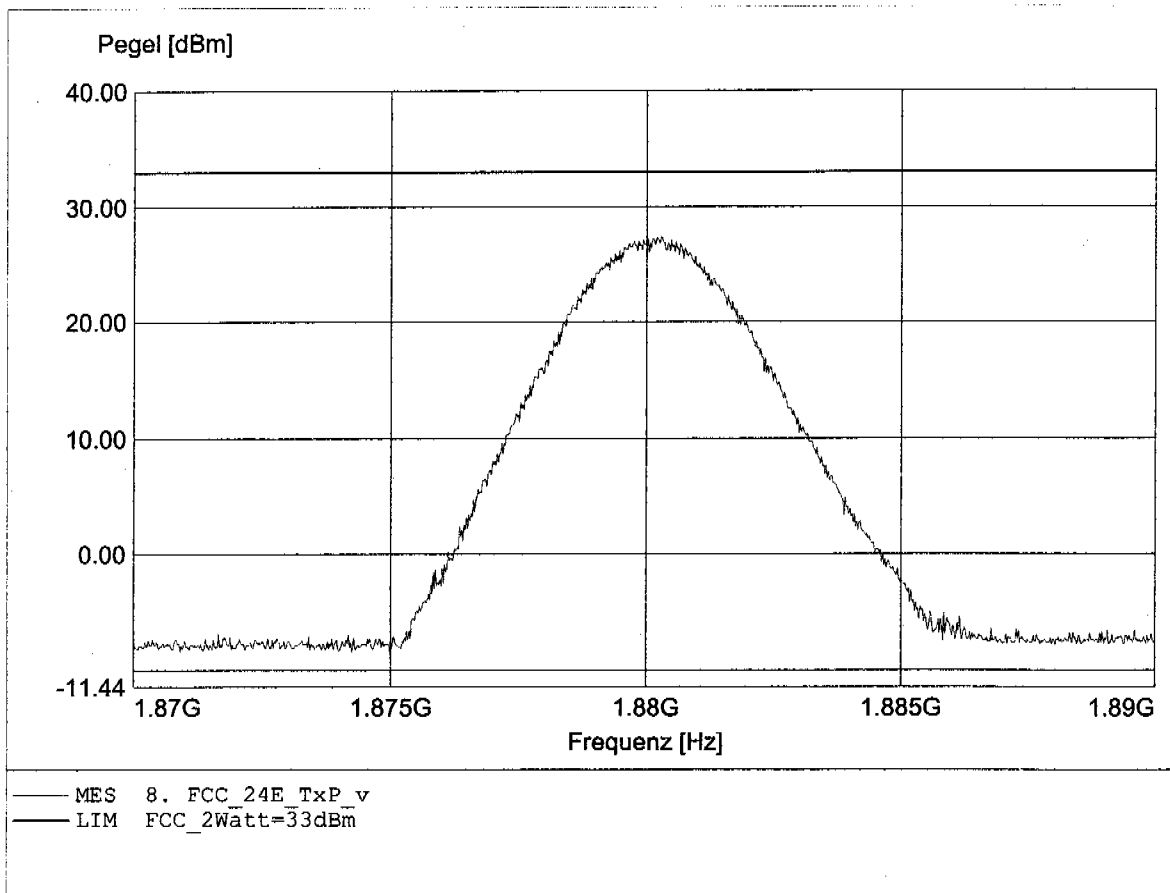


**Equivalent Isotropically Radiated Power
FCC RULES PART 24 SUBPART E**

EUT / Model: GPRS Dual Band Handset / EB-G60U
Channel: 661
Approval Holder: Compal Communications Inc.
Test Site / Operator: ETS / Mr. F.Schulz
Temperature/ Voltage: 23°C / Unom. : 3.8 VDC
Test Specification: according to §24.232
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq: 1.880GHz, Pmax: 27.73dBm, RBW: 3MHz

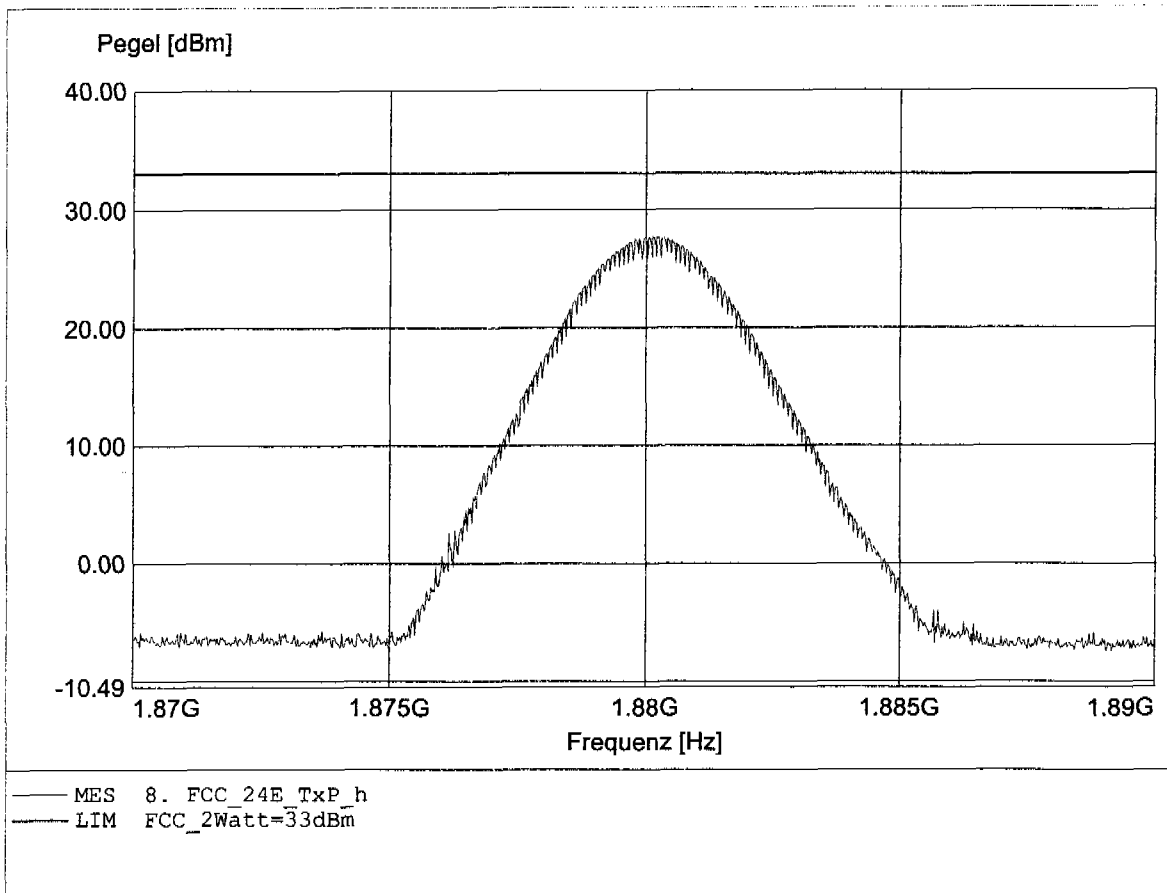


**Equivalent Isotropically Radiated Power
FCC RULES PART 24 SUBPART E**

EUT / Model: GPRS Dual Band Handset / EB-G60U
Channel: 810
Approval Holder: Compal Communications Inc.
Test Site / Operator: ETS / Mr. F.Schulz
Temperature/ Voltage: 23°C / Unom. : 3.8 VDC
Test Specification: according to §24.232
Comment 1: Dist.: 3m, Ant.: HL025, PCL 0
Comment 2: Freq: 1.910GHz, Pmax: 26.87dBm, RBW: 3MHz

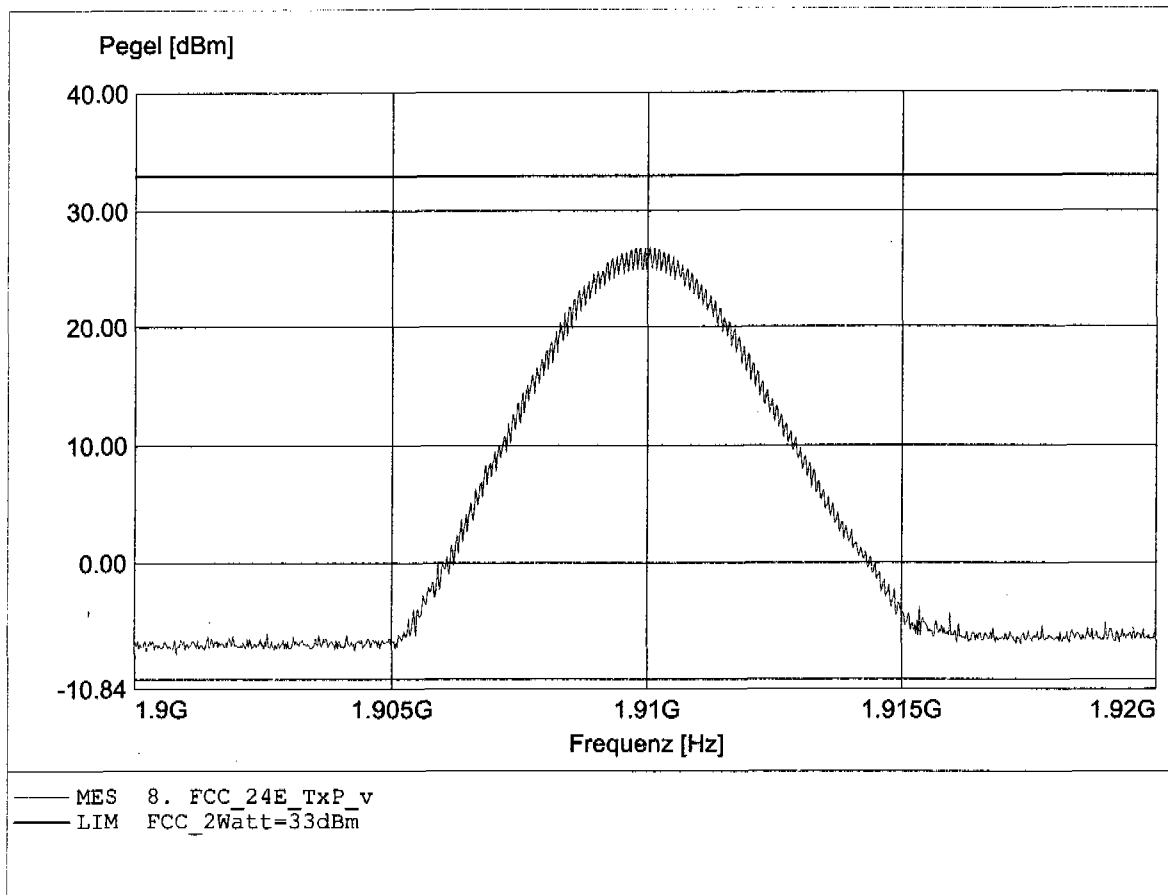


**Equivalent Isotropically Radiated Power
FCC RULES PART 24 SUBPART E**

EUT / Model: GPRS Dual Band Handset / EB-G60U
Channel: 810
Approval Holder: Compal Communications Inc.
Test Site / Operator: ETS / Mr. F.Schulz
Temperature/ Voltage: 23°C / Unom. : 3.8 VDC
Test Specification: according to §24.232
Comment 1: Dist.: 3m, Ant.: HL025, PCL 0
Comment 2: Freq: 1.910GHz, Pmax: 26.93dBm, RBW: 3MHz

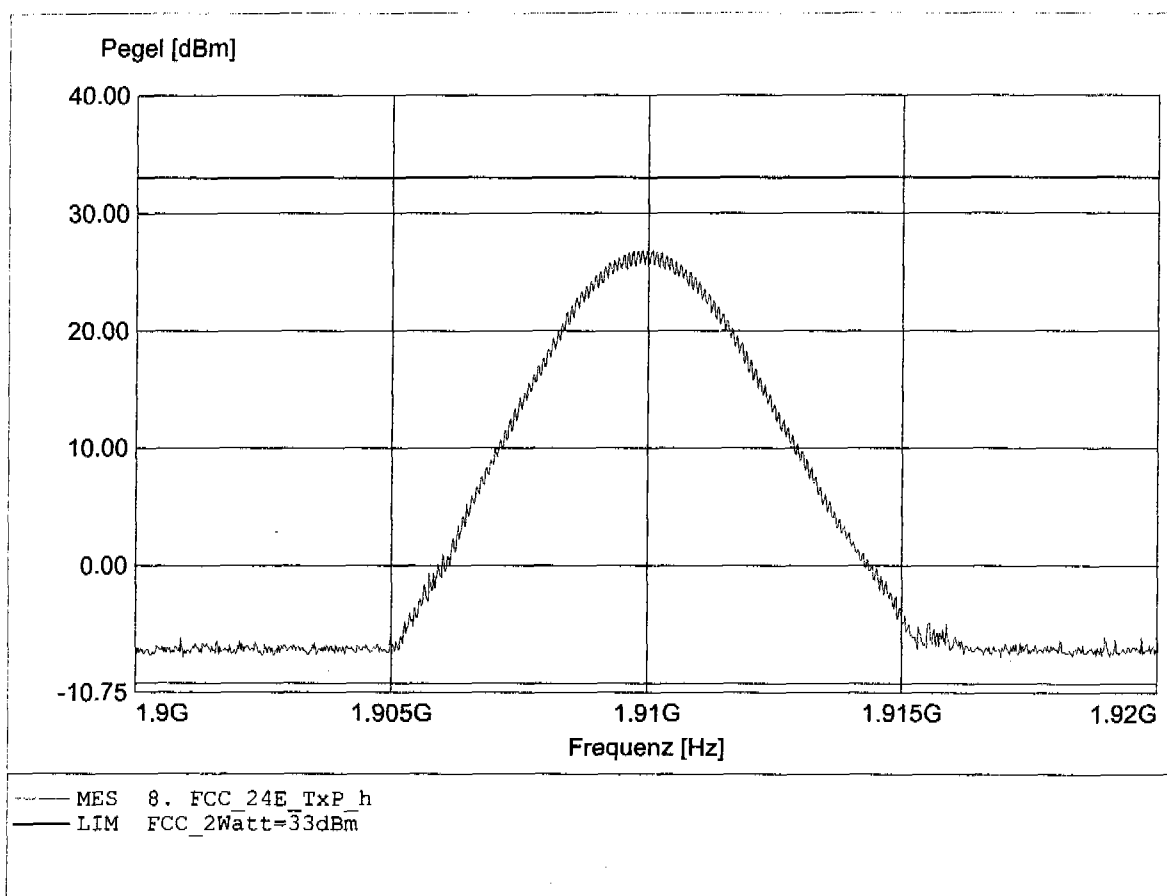


**Effective Radiated Power
FCC RULES PART 22 SUBPART H**

EUT / Model: Dual Band Mobile Handset / EB-G60U
Channel: 128
Approval Holder: Compal Communications Inc.
Operating Condition: Tnom:23°C / Unom: 3.8 V DC
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §22.913
Comment 1: Dist.: 3m, Ant.: HL223
Comment 2: Freq: 824.224MHz, Pmax: 13.94dBm, RBW: 100kHz

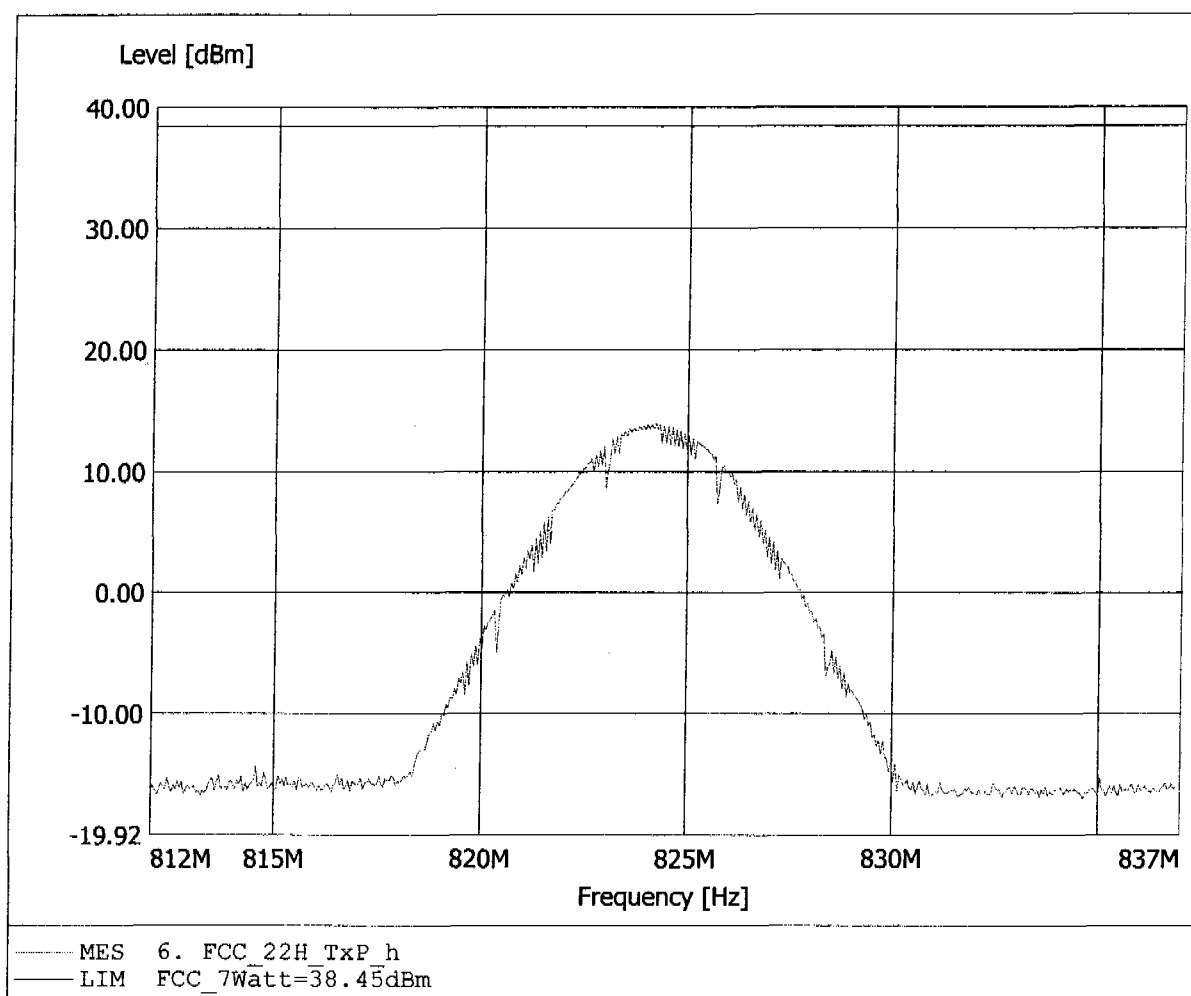


Effective Radiated Power
FCC RULES PART 22 SUBPART H

EUT / Model: Dual Band Mobile Handset / EB-G60U
Channel: 128
Approval Holder: Compal Communications Inc.
Operating Condition: Tnom:23°C / Unom: 3.8 V DC
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §22.913
Comment 1: Dist.: 3m, Ant.: HL223
Comment 2: Freq: 824.174MHz, Pmax: 25.68dBm, RBW: 100kHz

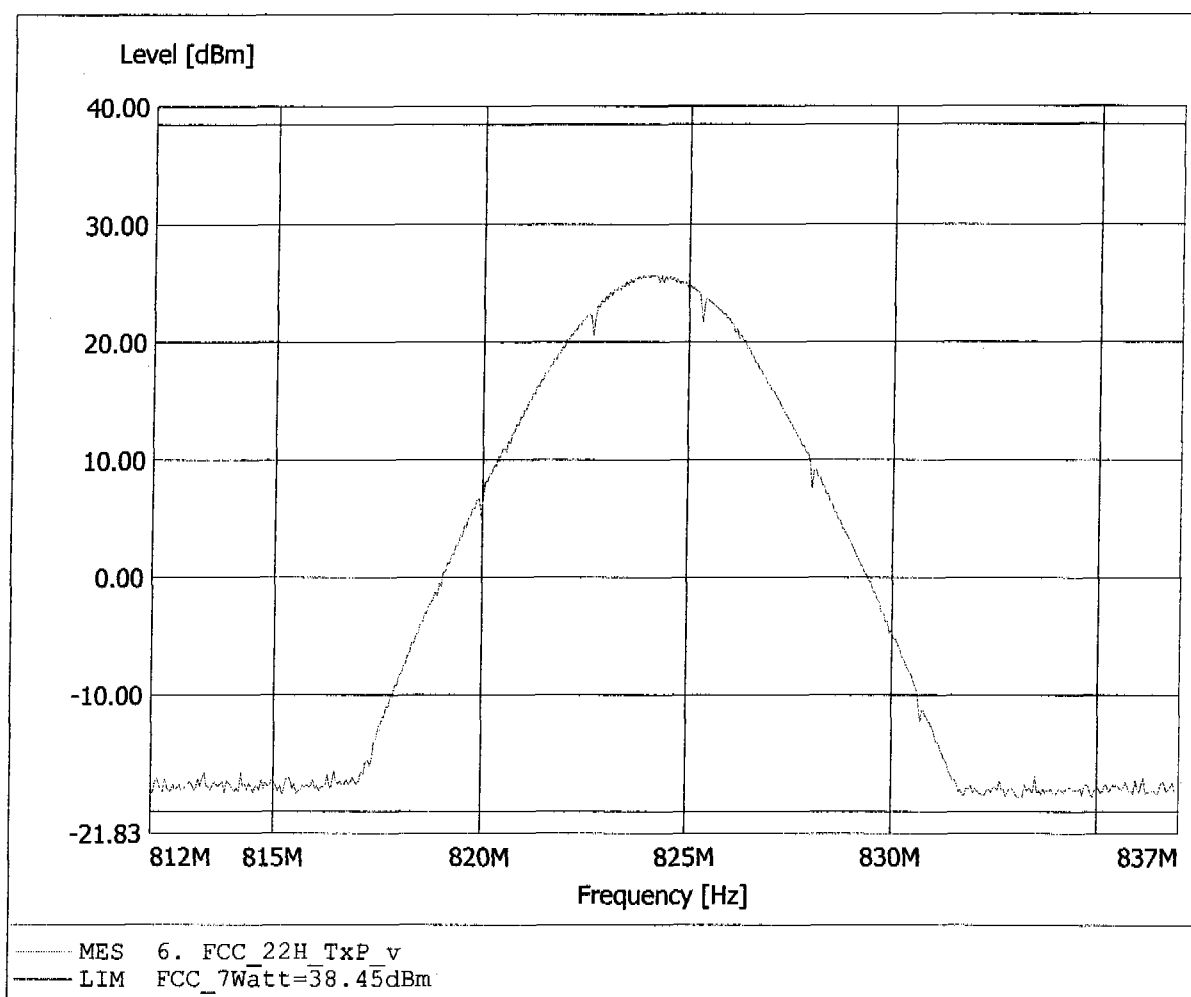


Effective Radiated Power
FCC RULES PART 22 SUBPART H

EUT / Model: Dual Band Mobile Handset / EB-G60U
Channel: 189
Approval Holder: Compal Communications Inc.
Operating Condition: Tnom:23°C / Unom: 3.8 V DC
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §22.913
Comment 1: Dist.: 3m, Ant.: HL223
Comment 2: Freq: 836.375MHz, Pmax: 11.65dBm, RBW: 100kHz

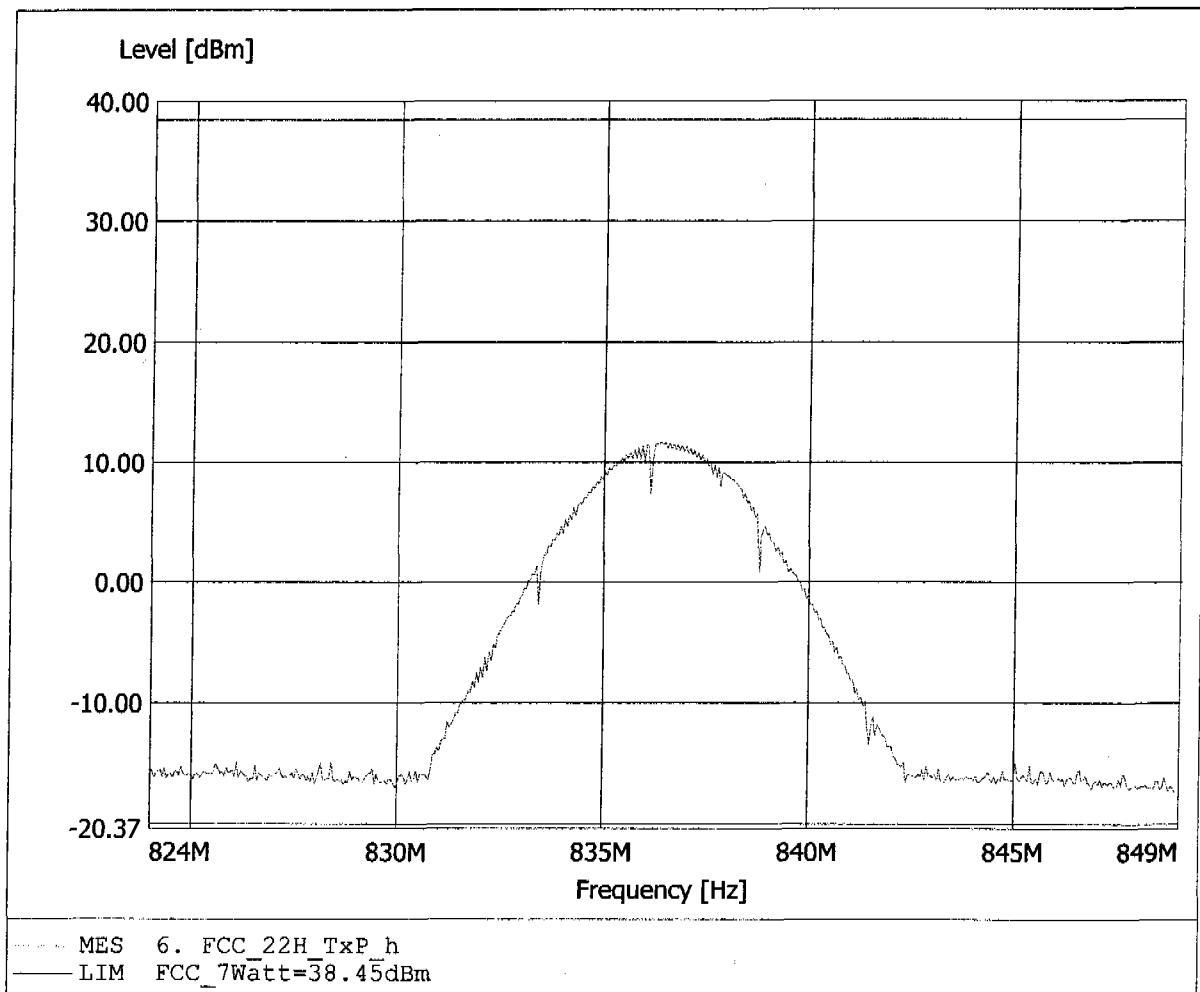


Effective Radiated Power
FCC RULES PART 22 SUBPART H

EUT / Model: Dual Band Mobile Handset / EB-G60U
Channel: 189
Approval Holder: Compal Communications Inc.
Operating Condition: Tnom:23°C / Unom: 3.8 V DC
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S22.913
Comment 1: Dist.: 3m, Ant.: HL223
Comment 2: Freq: 836.525MHz, Pmax: 24.59dBm, RBW: 100kHz

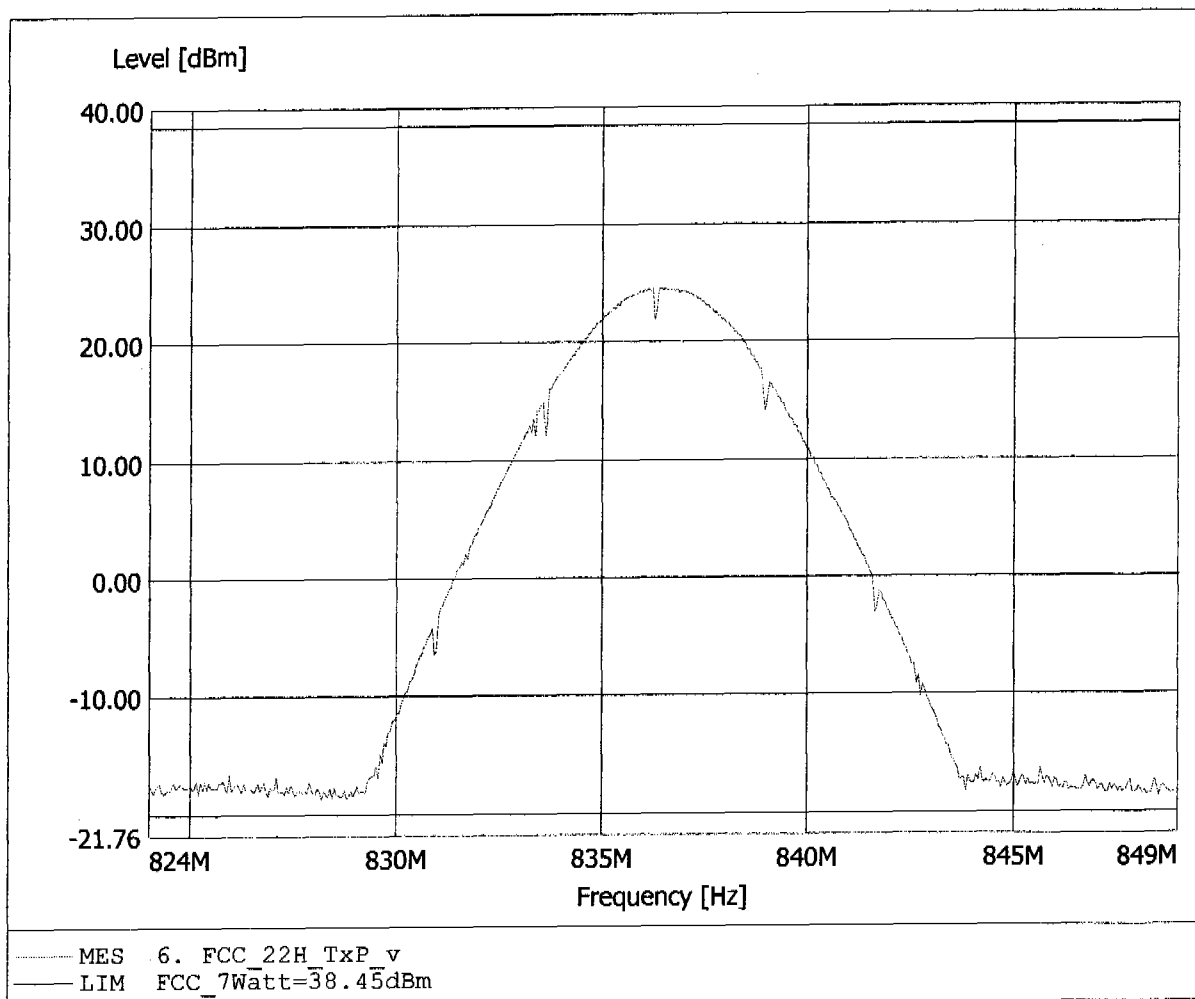


**Effective Radiated Power
FCC RULES PART 22 SUBPART H**

EUT / Model: Dual Band Mobile Handset / EB-G60U
Channel: 251
Approval Holder: Compal Communications Inc.
Operating Condition: Tnom:23°C / Unom: 3.8 V DC
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §22.913
Comment 1: Dist.: 3m, Ant.: HL223
Comment 2: Freq: 848.776MHz, Pmax: 13.23dBm, RBW: 100kHz

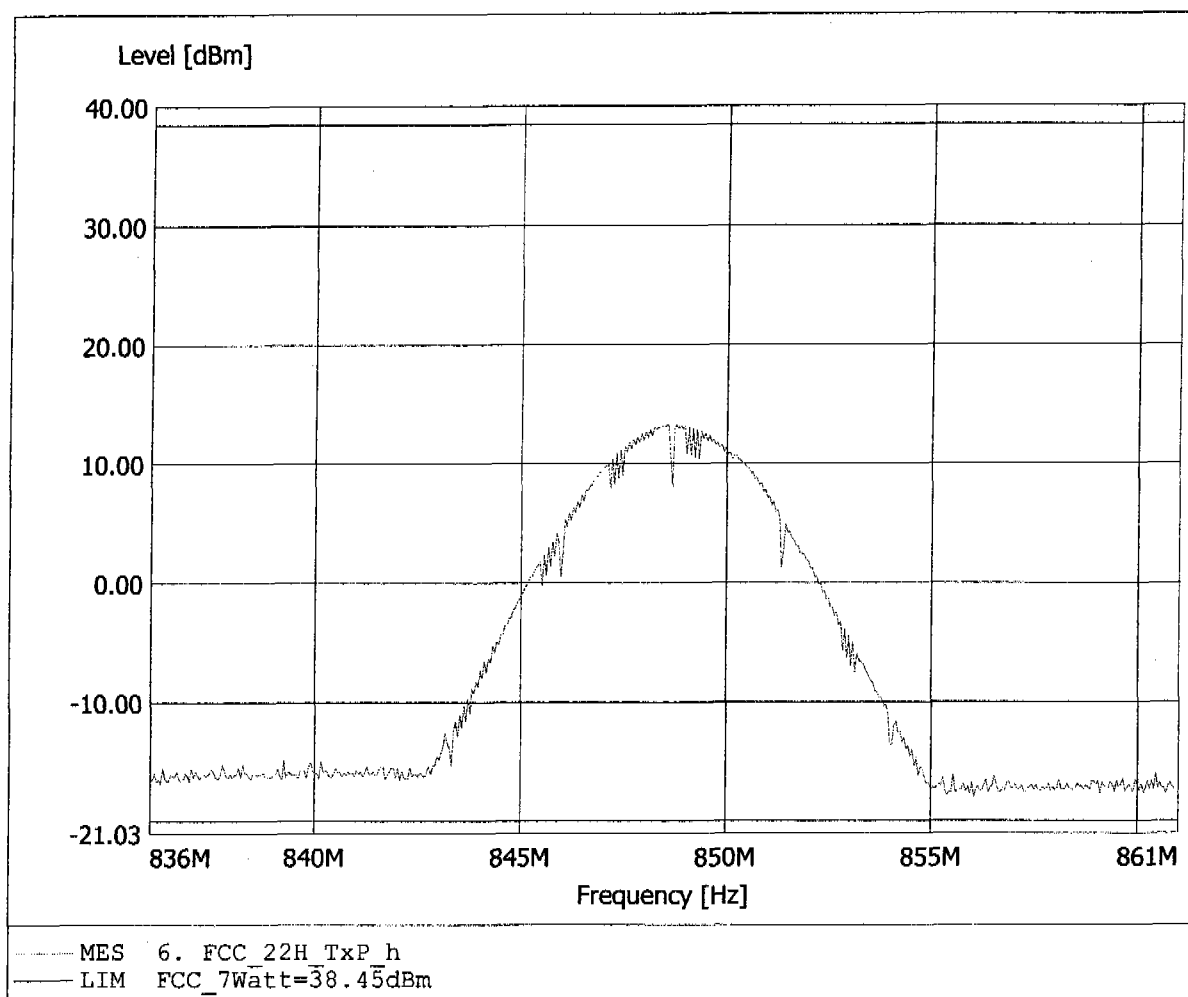

**Effective Radiated Power
FCC RULES PART 22 SUBPART H**

EUT / Model: Dual Band Mobile Handset / EB-G60U
Channel: 251
Approval Holder: Compal Communications Inc.
Operating Condition: Tnom:23°C / Unom: 3.8 V DC
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S22.913
Comment 1: Dist.: 3m, Ant.: HL223
Comment 2: Freq: 848.675MHz, Pmax: 25.68dBm, RBW: 100kHz

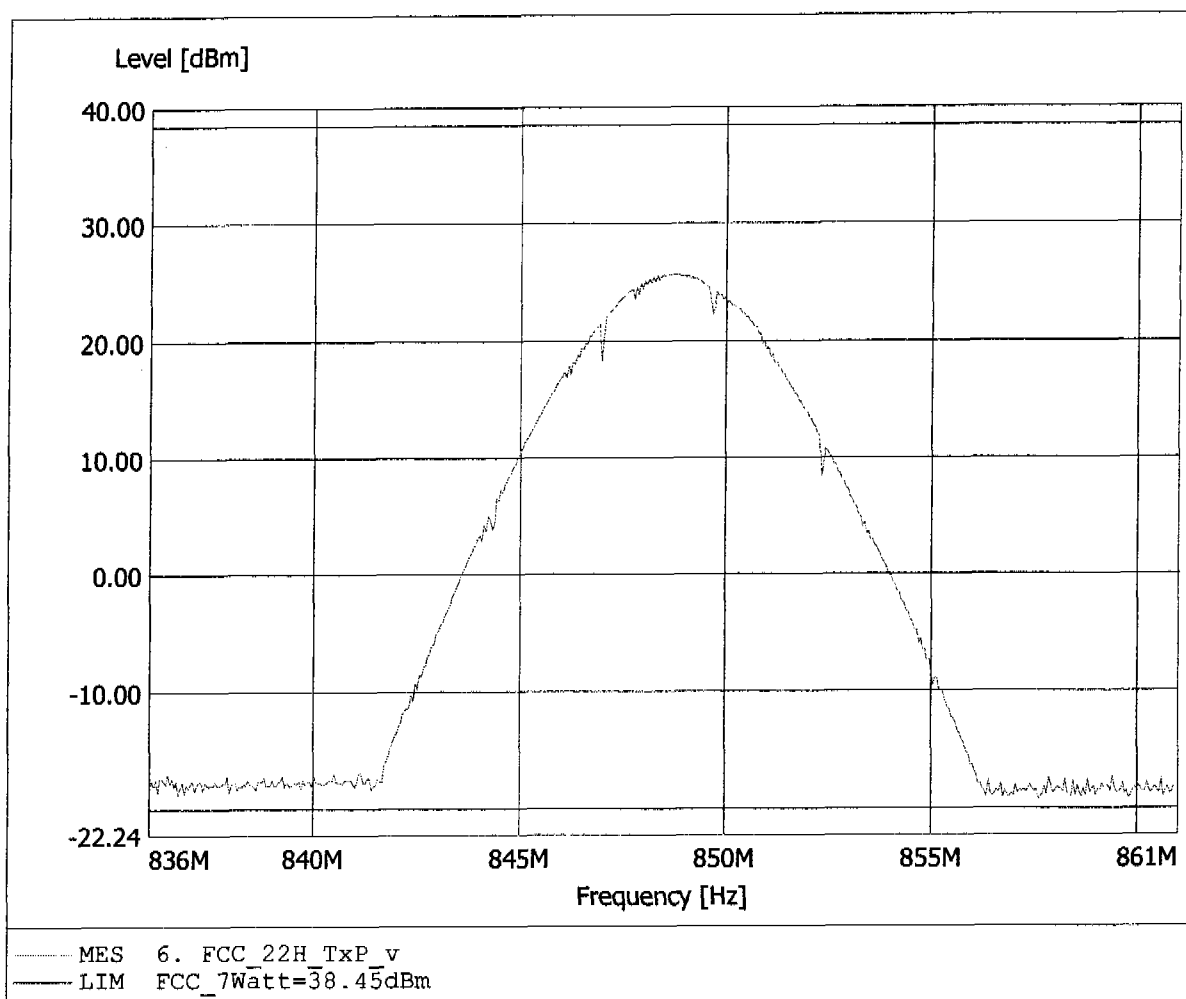

Appendix D

Modulation Requirements

Appendix E

Audio Filter Characteristics

Appendix F


Emission Limitation

Appendix G

Occupied Bandwith




Marker 1 [T1] RBW 3 kHz RF Att 50 dB
Ref Lvl 22.41 dBm VBW 3 kHz
35 dBm 1.85026914 GHz SWT 280 ms Unit dBm

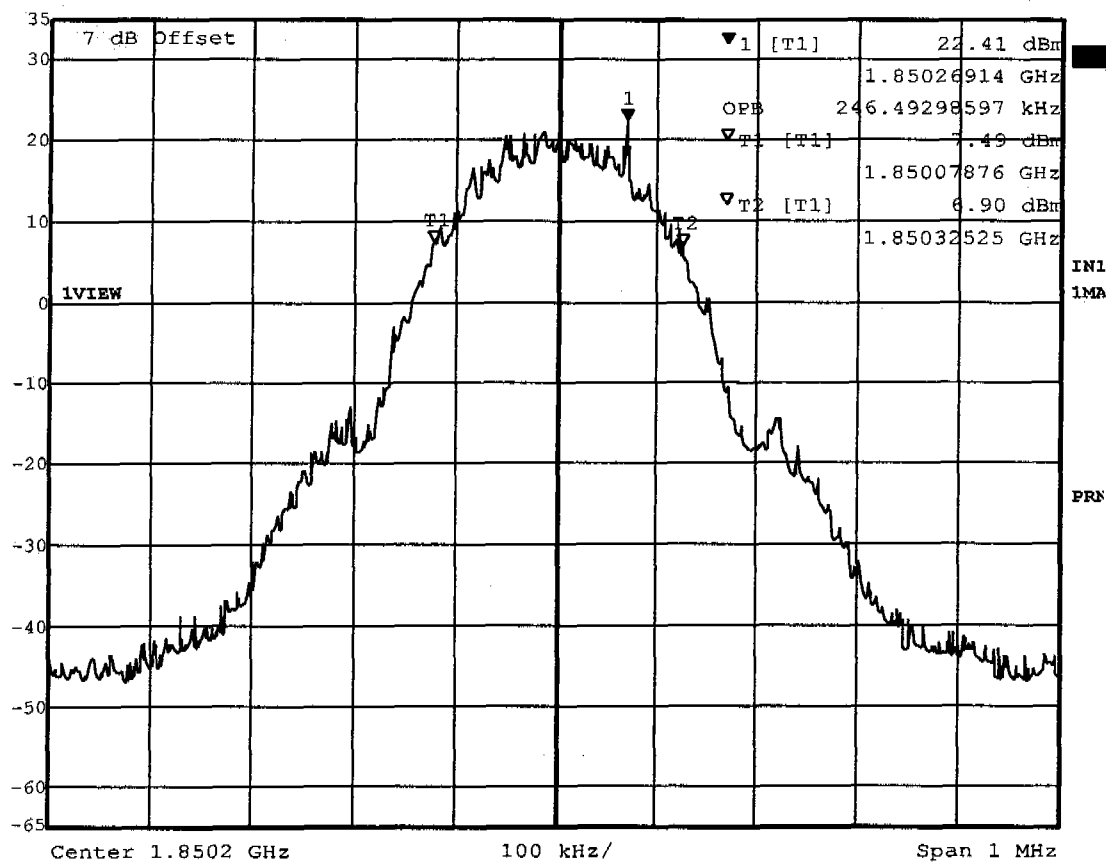

Title: Model:EB-G60U
Comment A: Occupied Bandwidth Channel 512
Date: 10.FEB.2003 16:56:51




Marker 1 [T1] RBW 3 kHz RF Att 50 dB
Ref Lvl 21.02 dBm VBW 3 kHz
35 dBm 1.88006914 GHz SWT 280 ms Unit dBm

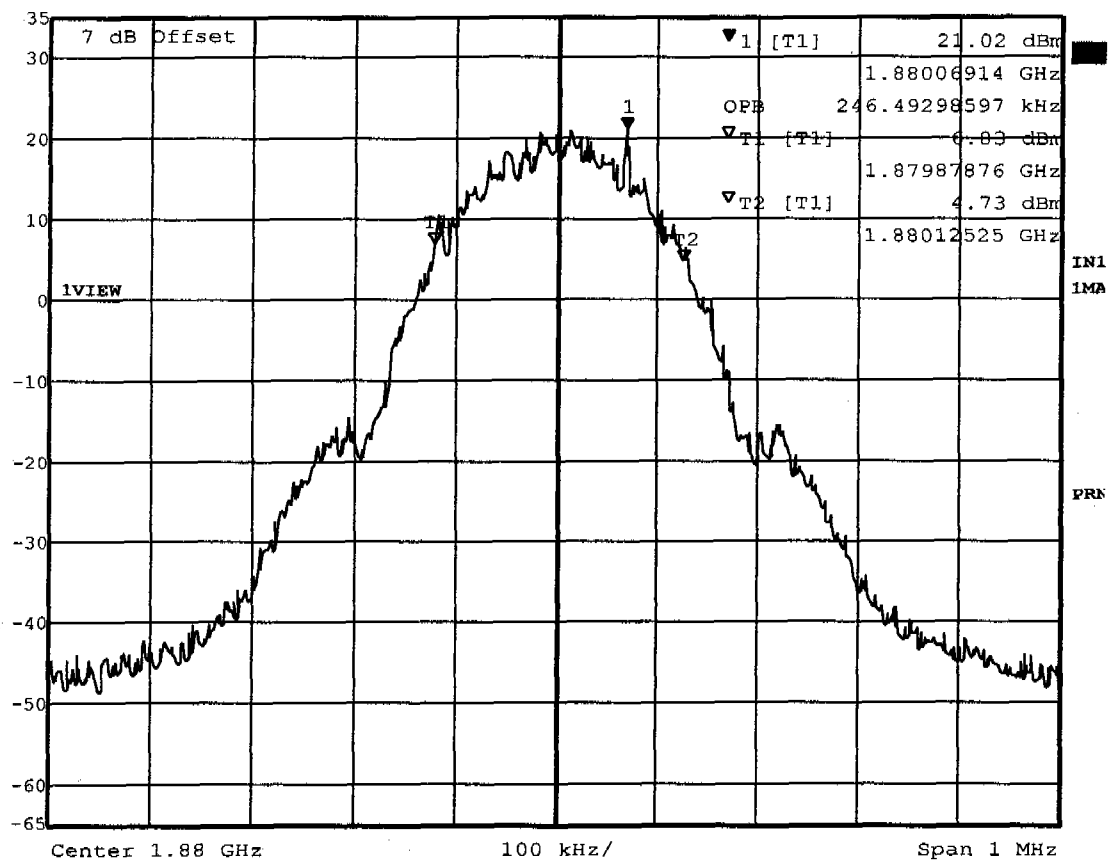

Title: Model:EB-G60U
Comment A: Occupied Bandwidth Channel 661
Date: 10.FEB.2003 16:51:17




Marker 1 [T1] RBW 3 kHz RF Att 50 dB
Ref Lvl 20.94 dBm VBW 3 kHz
35 dBm 1.90980301 GHz SWT 280 ms Unit dBm

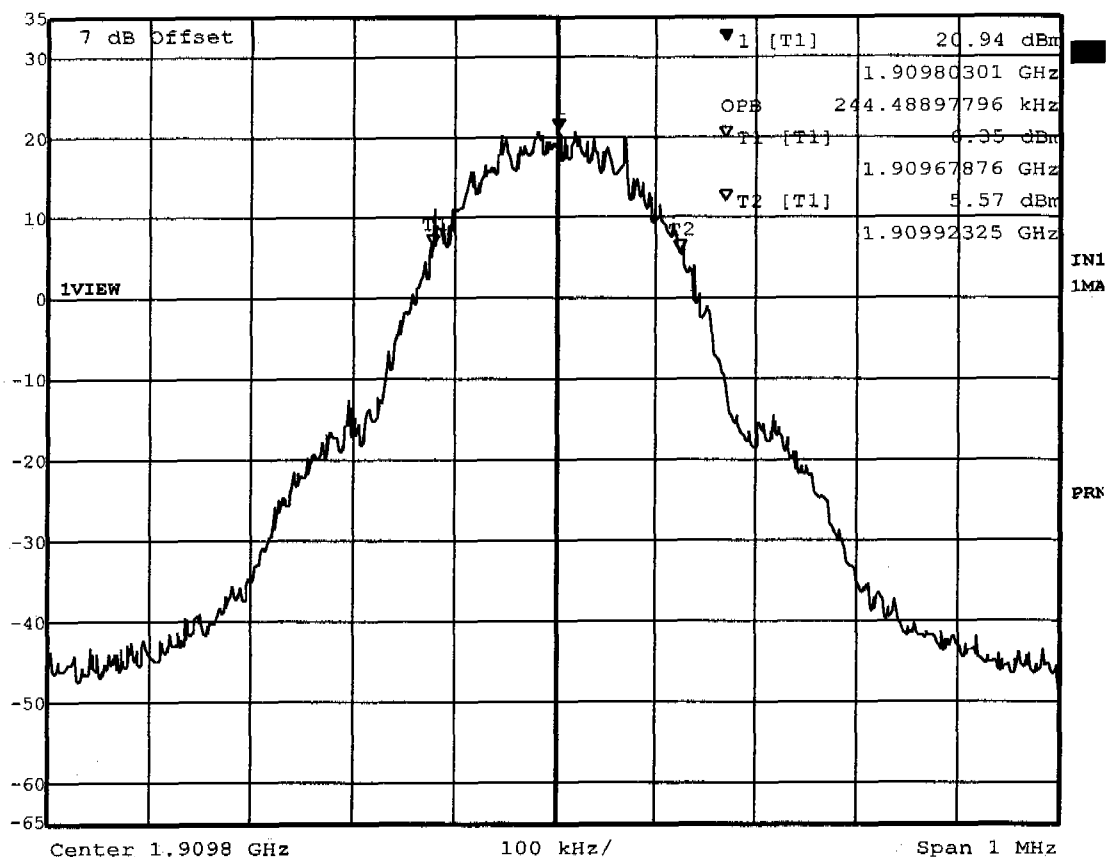

Title: Model:EB-G60U
Comment A: Occupied Bandwidth Channel 810
Date: 10.FEB.2003 16:47:53




Ref Lvl 35 dBm Marker 1 [T1 ndB] 26.00 dB RBW 3 kHz RF Att 50 dB
BW 312.62525050 kHz VBW 3 kHz Unit dBm

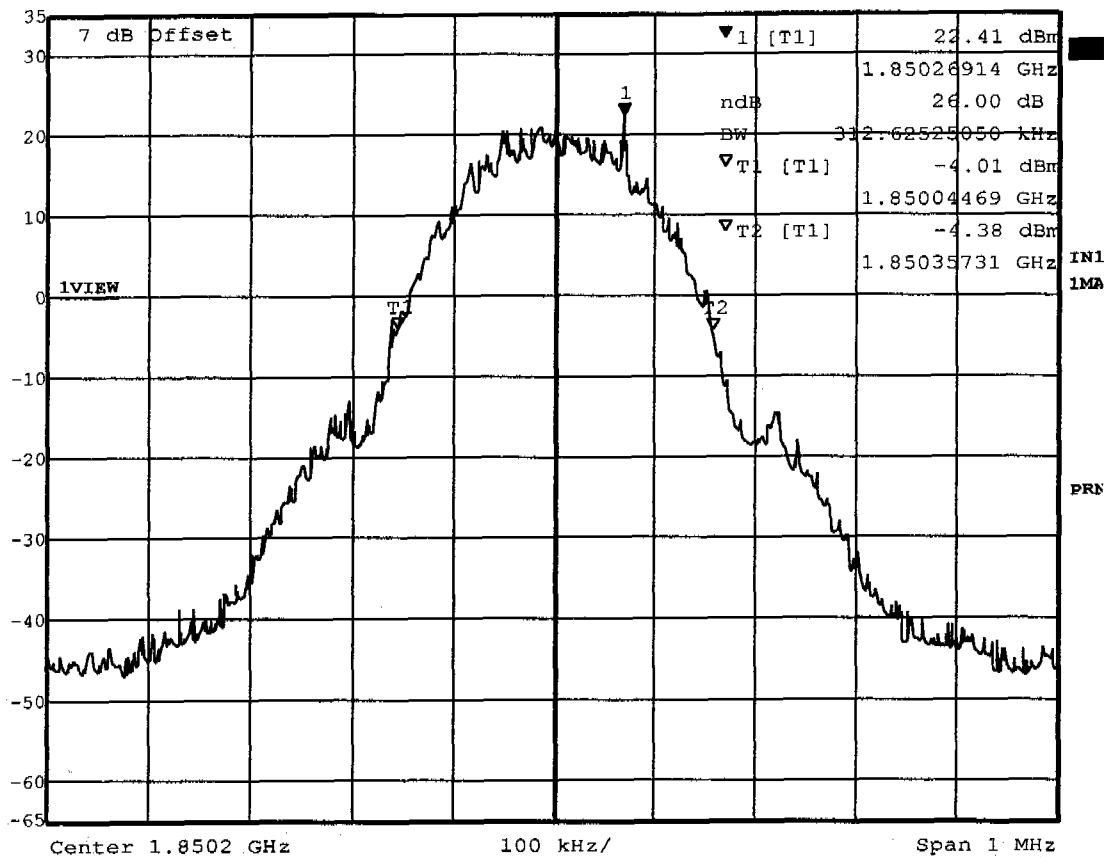

Title: Model:EB-G60U
Comment A: -26 dBc Bandwidth Channel 512
Date: 10.FEB.2003 16:59:29




Marker 1 [T1 ndB] RBW 3 kHz RF Att 50 dB
Ref Lvl ndB 26.00 dB VBW 3 kHz
35 dBm BW 316.63326653 kHz SWT 280 ms Unit dBm

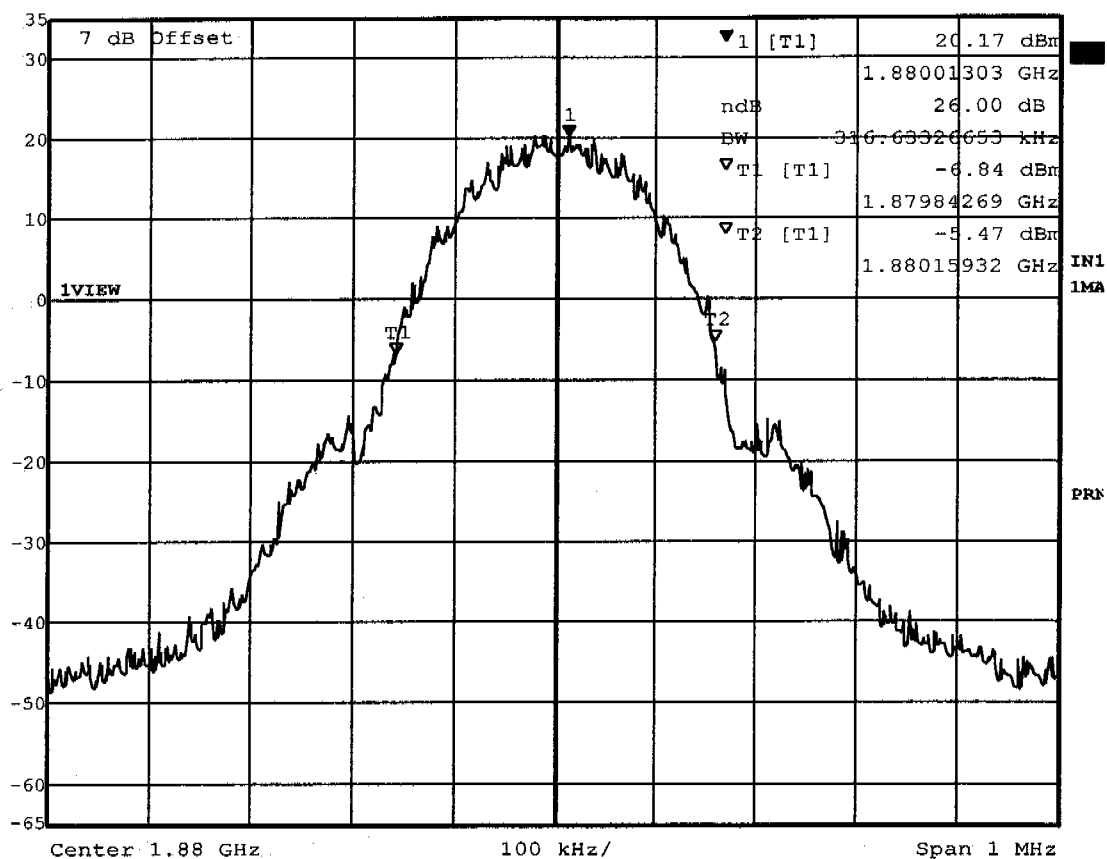

Title: Model:EB-G60U
Comment A: -26 dBc Bandwidth Channel 661
Date: 10.FEB.2003 17:03:40




Marker 1 [T1 ndB] RBW 3 kHz RF Att 50 dB
Ref Lvl ndB 26.00 dB VBW 3 kHz
35 dBm BW 312.62525050 kHz SWT 280 ms Unit dBm

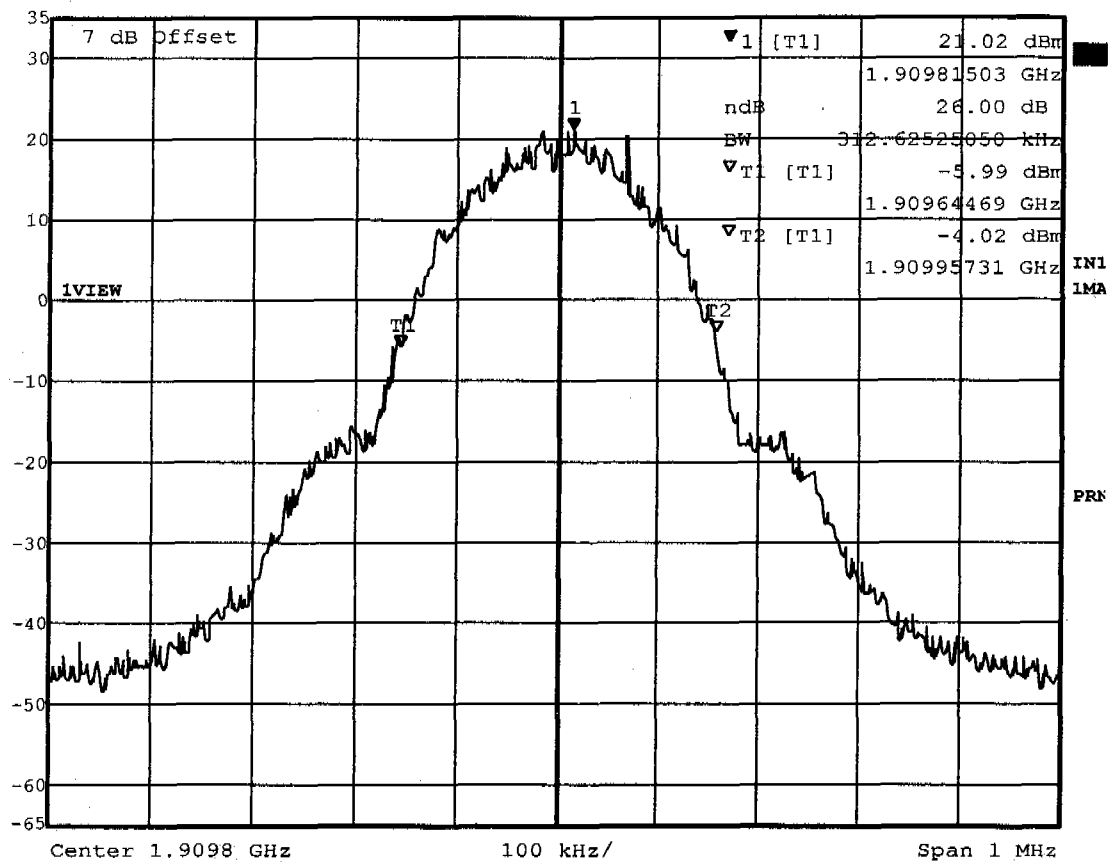

Title: Model:EB-G60U
Comment A: -26 dBc Bandwidth Channel 810
Date: 10.FEB.2003 17:06:58




Marker 1 [T1] RBW 3 kHz RF Att 60 dB
Ref Lvl 22.90 dBm VBW 3 kHz
36 dBm 824.23907816 MHz SWT 280 ms Unit dBm

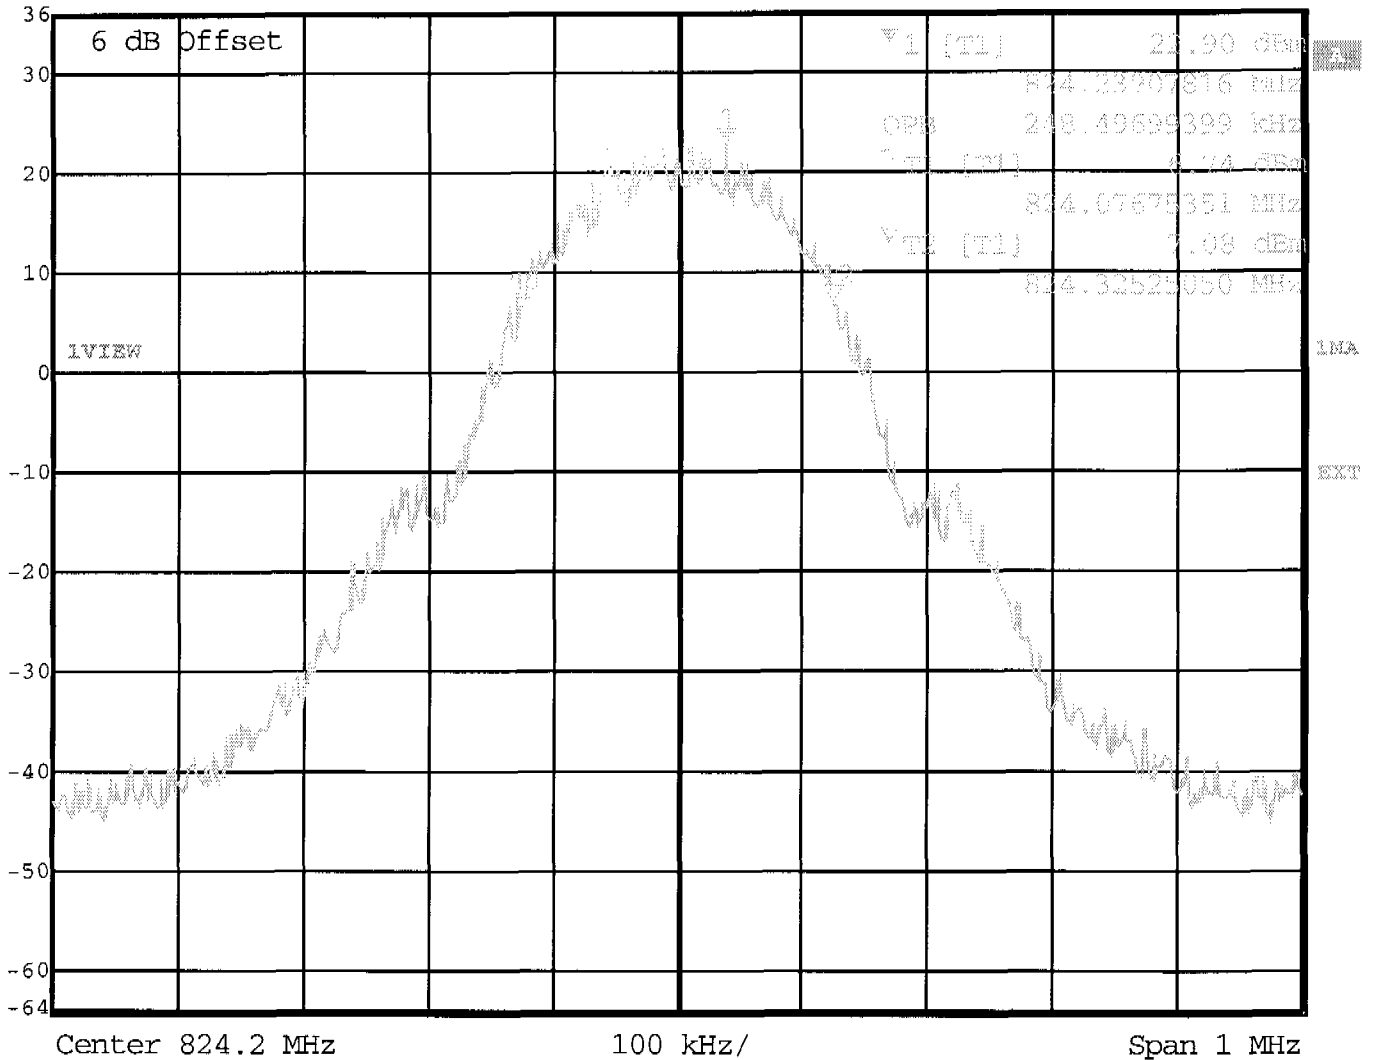

Title: Model: EB-G60U
Comment A: Occupied Bandwidth Channel 128
Date: 7.MAR.2003 10:35:31



Marker 1 [T1] RBW 3 kHz RF Att 60 dB
Ref Lvl 23.39 dBm VBW 3 kHz
36 dBm 836.39899800 MHz SWT 280 ms Unit dBm

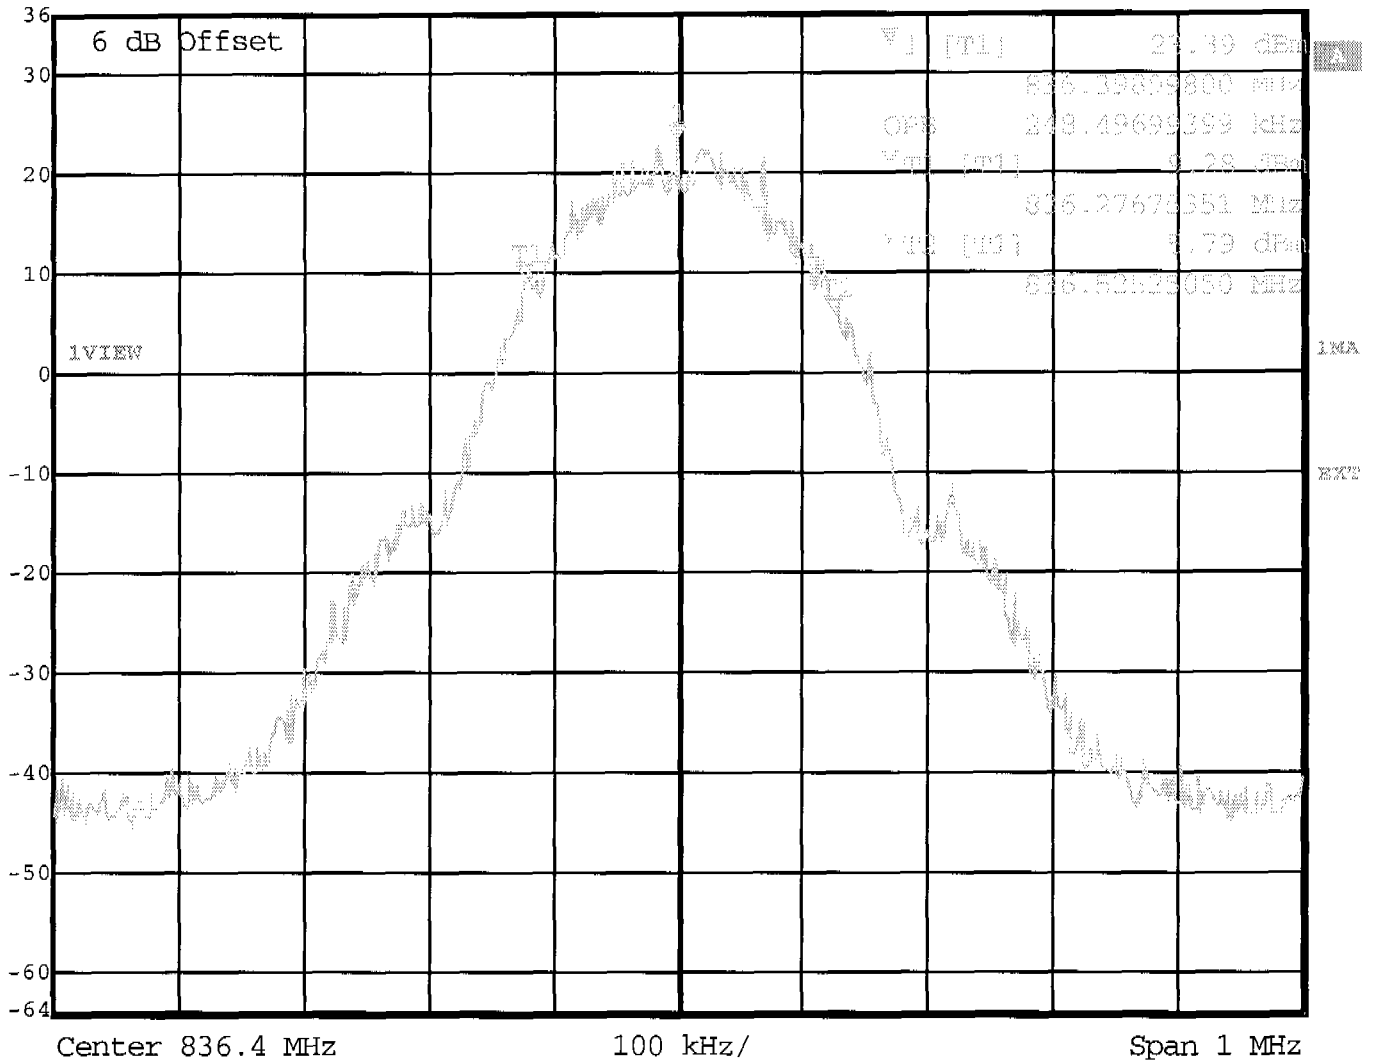

Center 836.4 MHz


100 kHz/

Span 1 MHz

Title: Model: EB-G60U
Comment A: Occupied Bandwidth Channel 189
Date: 7.MAR.2003 10:37:43



Marker 1 [T1] RBW 3 kHz RF Att 60 dB
Ref Lvl 21.90 dBm VBW 3 kHz
36 dBm 848.86713427 MHz SWT 280 ms Unit dBm

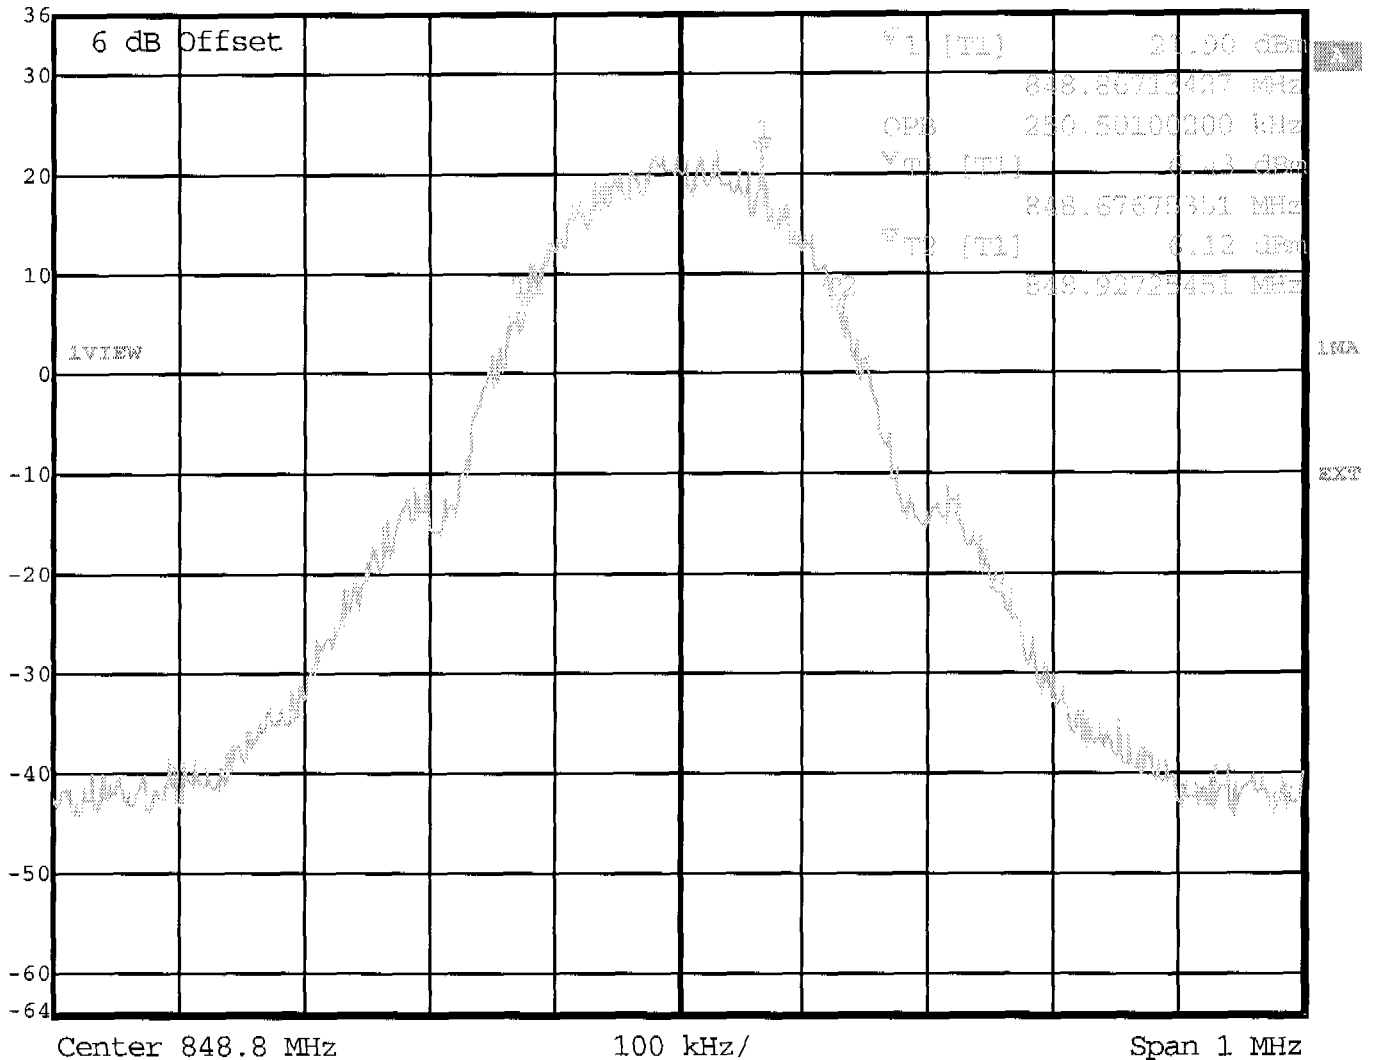

Center 848.8 MHz

100 kHz/

Span 1 MHz

Title: Model: EB-G60U
Comment A: Occupied Bandwidth Channel 251
Date: 7.MAR.2003 10:39:41



Ref Lvl

36 dBm

Marker 1 [F1] 0dB

Offset 26.00 dB

BW 316.63326653 kHz

RBW

3 kHz

RF Att

60 dB

VBW


3 kHz

SWT

280 ms

Unit

dBm

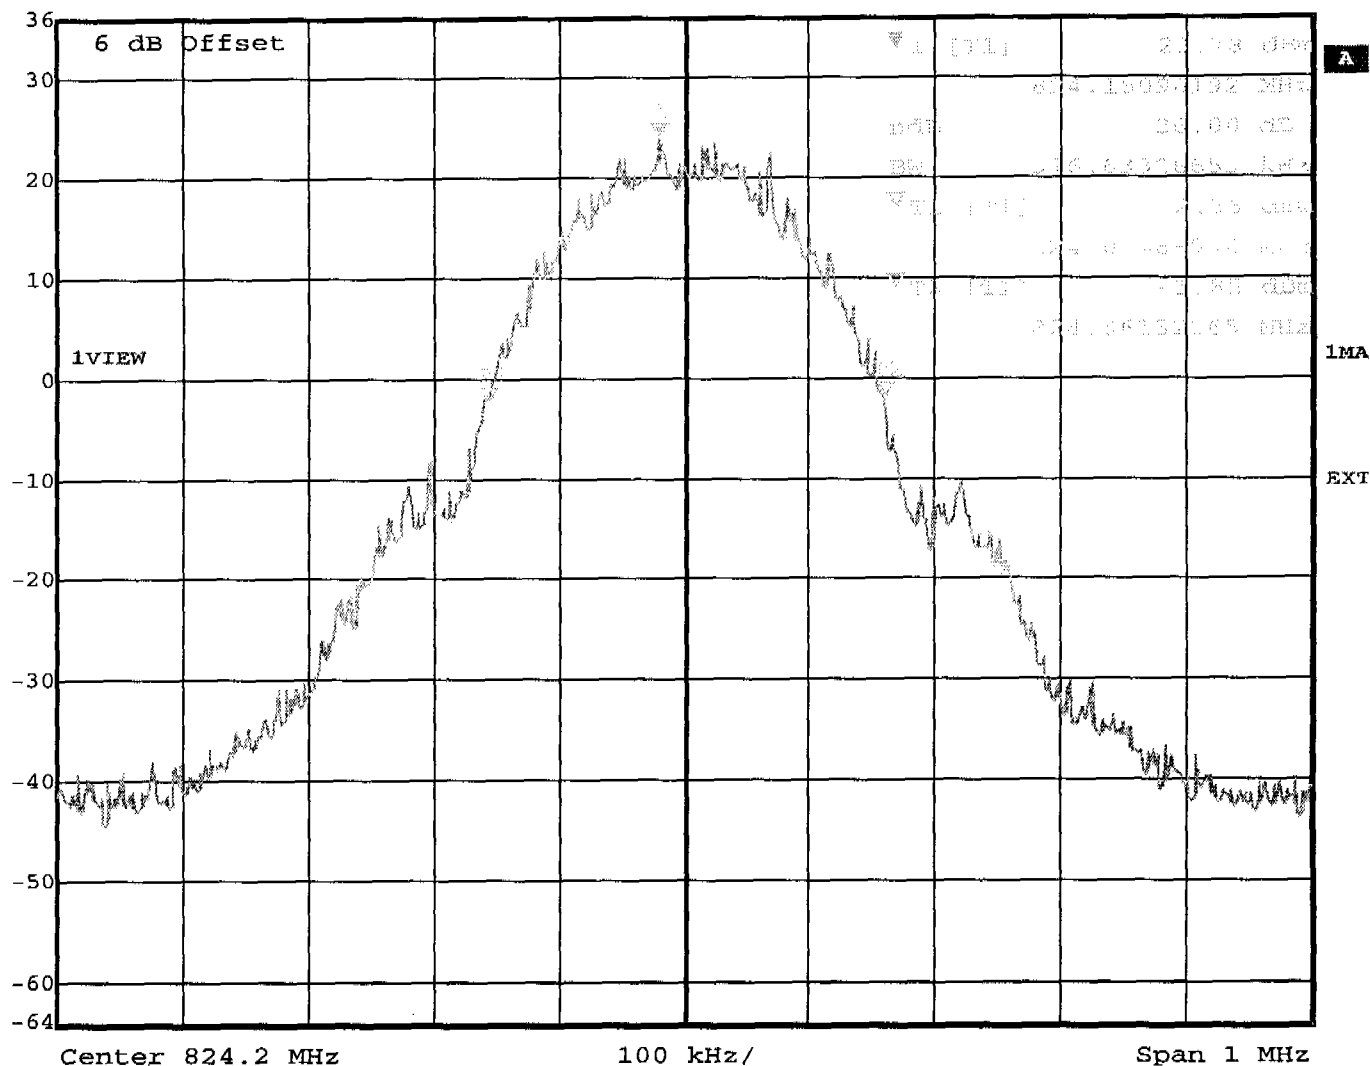


Title: Model: EB-G60U

Comment A: -26 dBc Bandwidth Channel 128

Date: 7.MAR.2003 10:53:28



Ref Lvl 36 dBm Marker 1 [T1 n3B] RBW 3 kHz RF Att 60 dB
n3B 35.00 dB VBW 3 kHz
BW 312.62835050 MHz SWT 280 ms Unit dBm

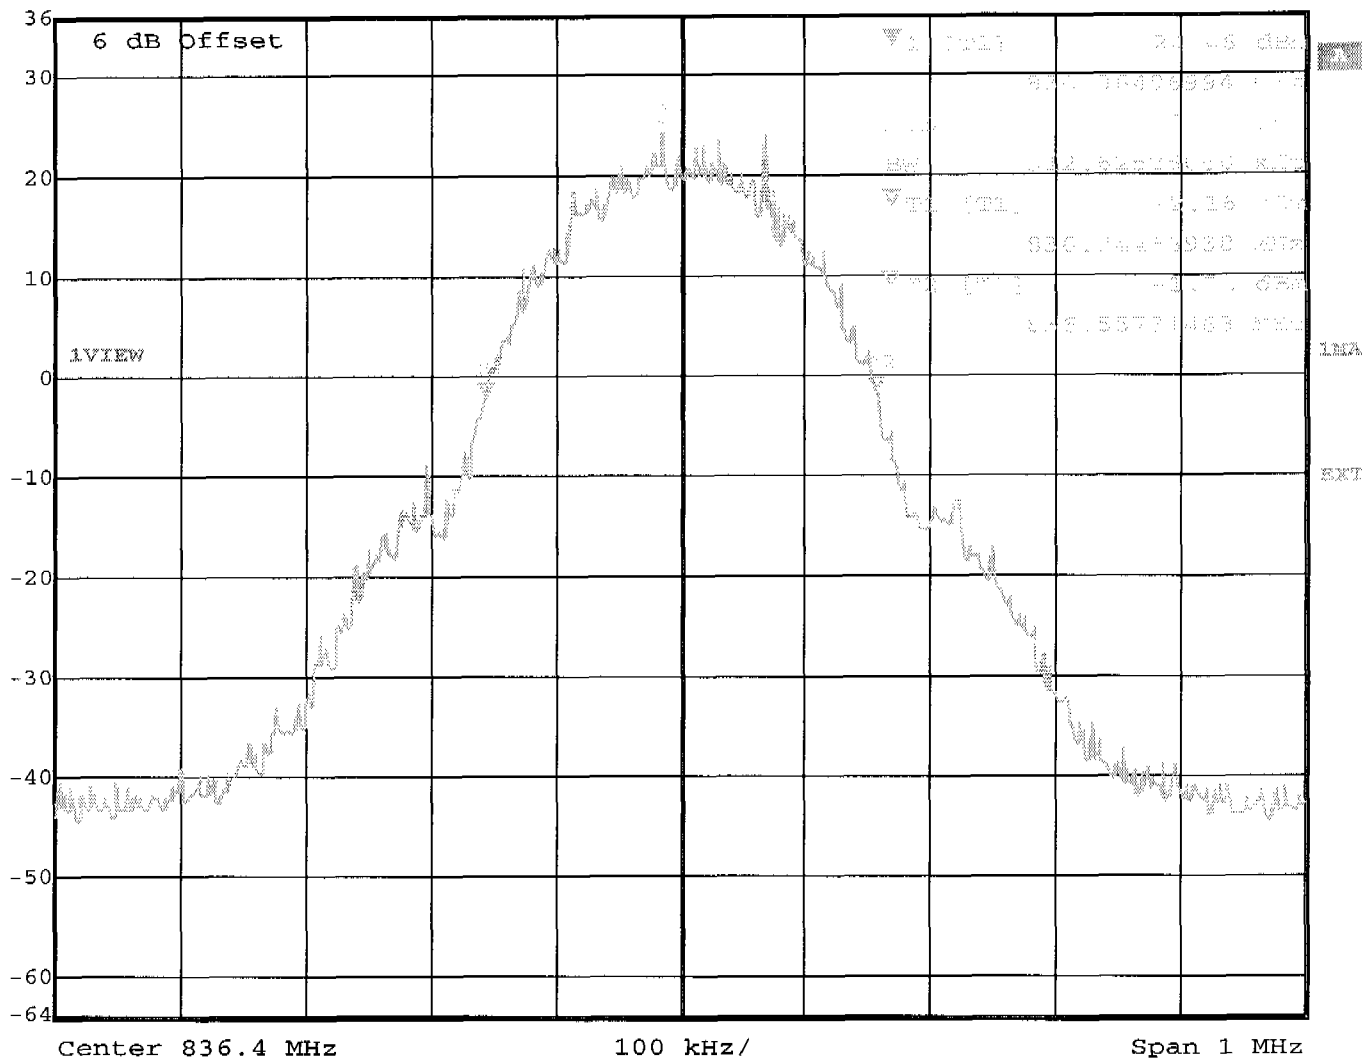

Center 836.4 MHz


100 kHz/

Span 1 MHz

Title: Model: EB-G60U
Comment A: -26 dBc Bandwidth Channel 189
Date: 7.MAR.2003 10:51:42



Ref Lvl 36 dBm Marker 1 [T1] n dB 26.00 dB RBW 3 kHz RF Att 60 dB
VBW 3 kHz
SWT 280 ms Unit dBm

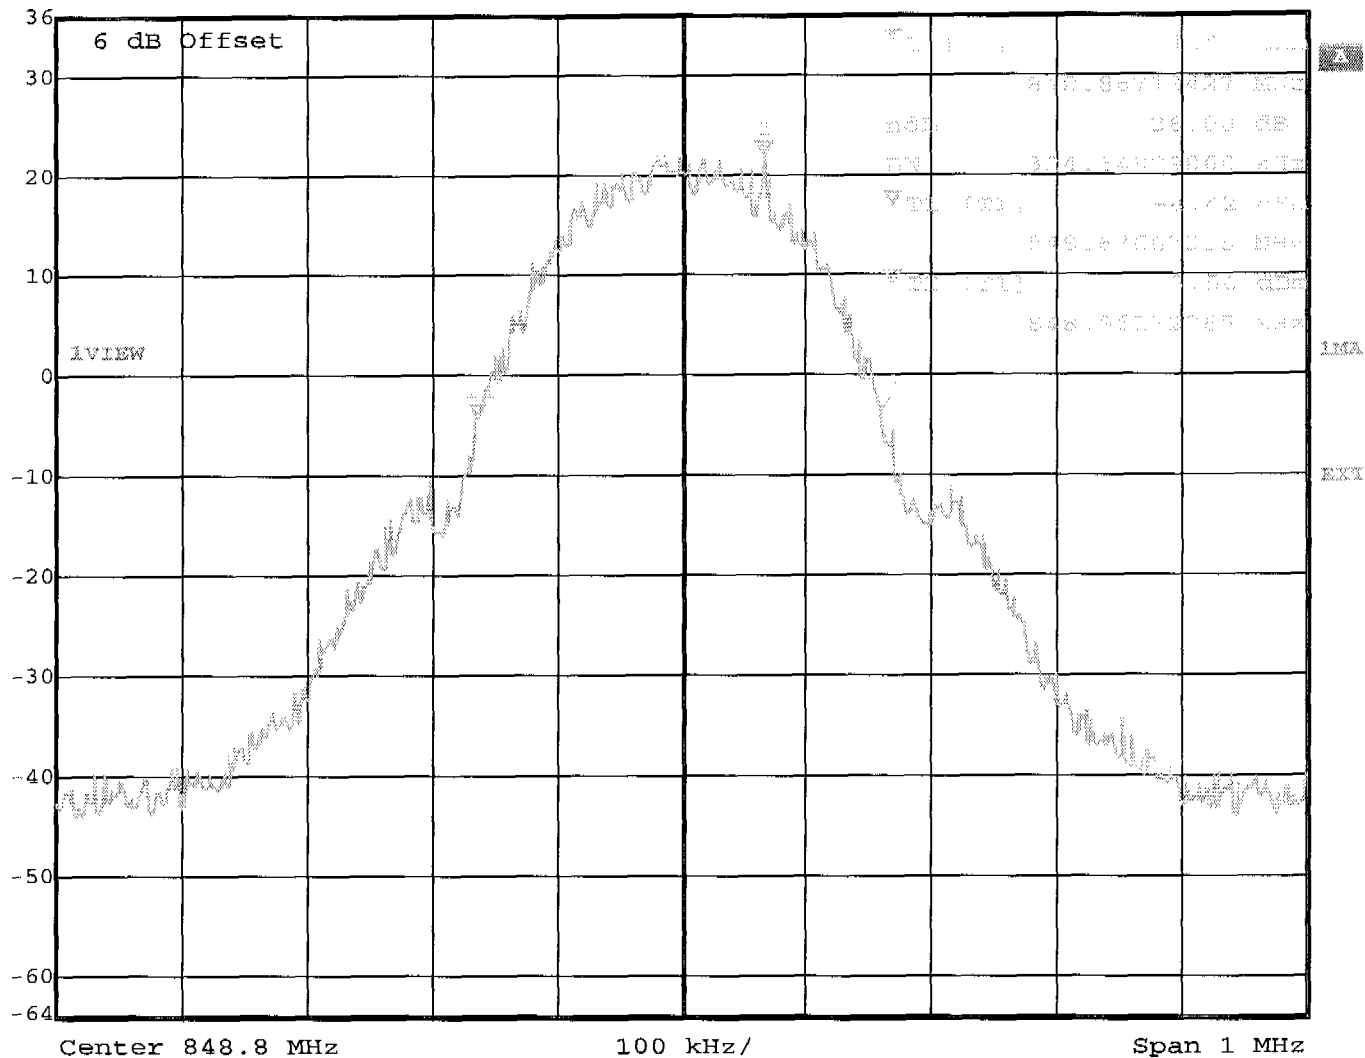

Title: Model: EB-G60U
Comment A: -26 dBc Bandwidth Channel 251
Date: 7.MAR.2003 10:49:23

Appendix H


Emissions in Receiver Critical Band



Ref Lvl
-10 dBm

Freq: 879.471 MHz
Pmax: -94.091 dBm

RBW 30 kHz RF Att 0 dB
VBW 30 kHz
SWT 70 ms Unit dBm

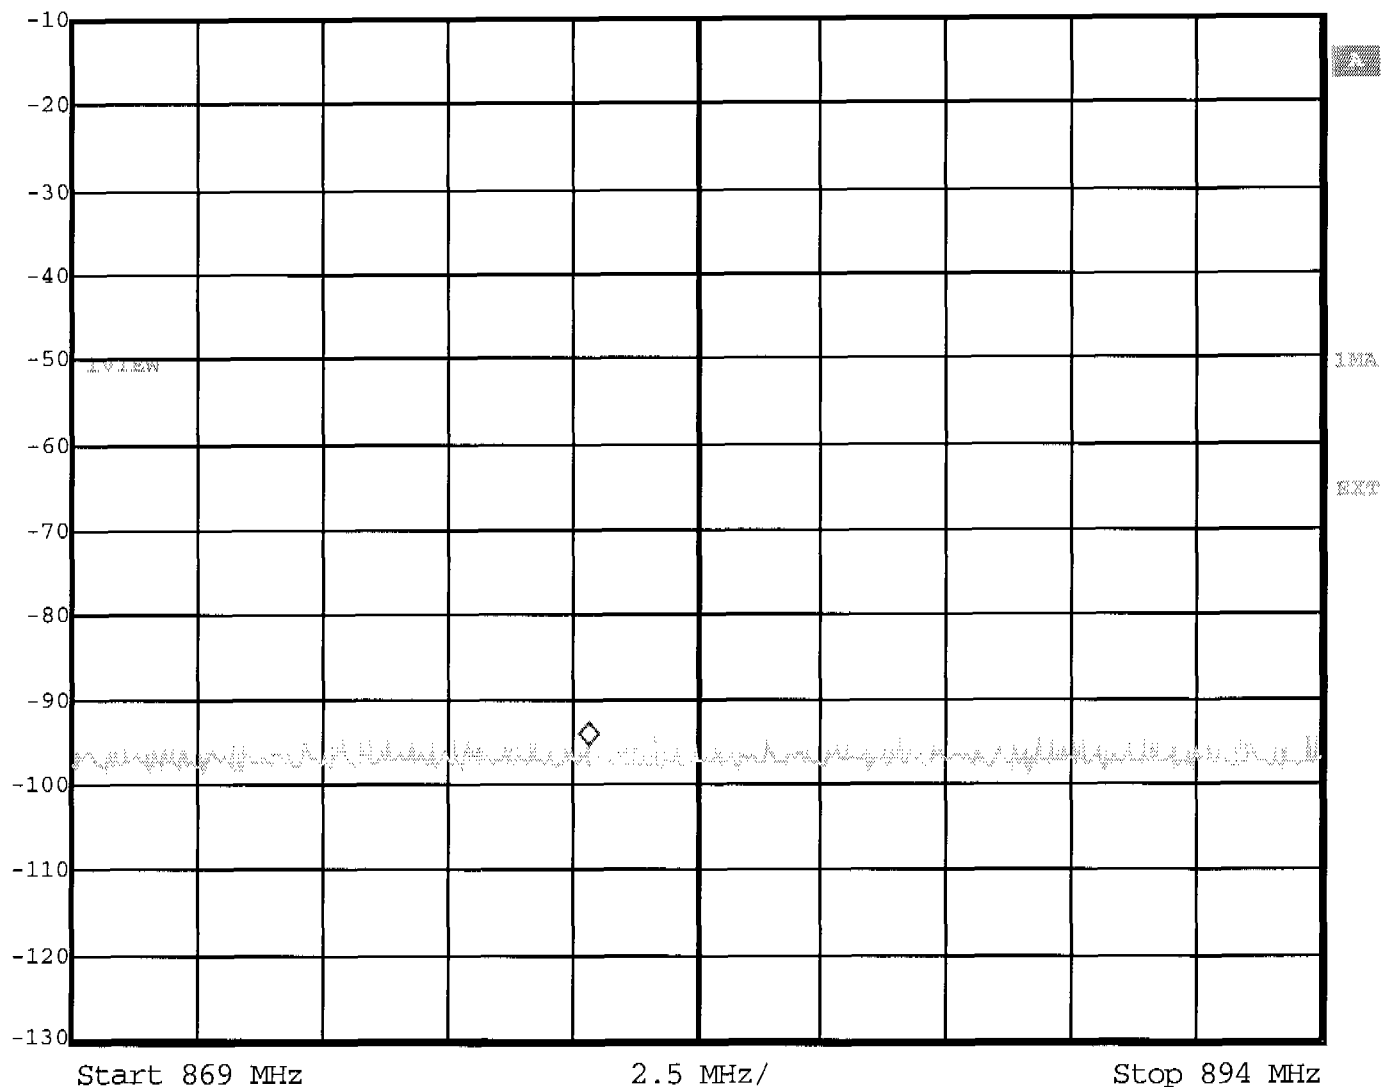


Title: Model: EB-G60U
Comment A: Emissions in Receiver Critical Band Channel 128
Date: 7.MAR.2003 15:05:43



Ref Lvl
-10 dBm

Freq: 881.325 MHz
Pmax: -94.545 dBm

RBW 30 kHz RF Att 0 dB
VBW 30 kHz
SWT 70 ms Unit dBm

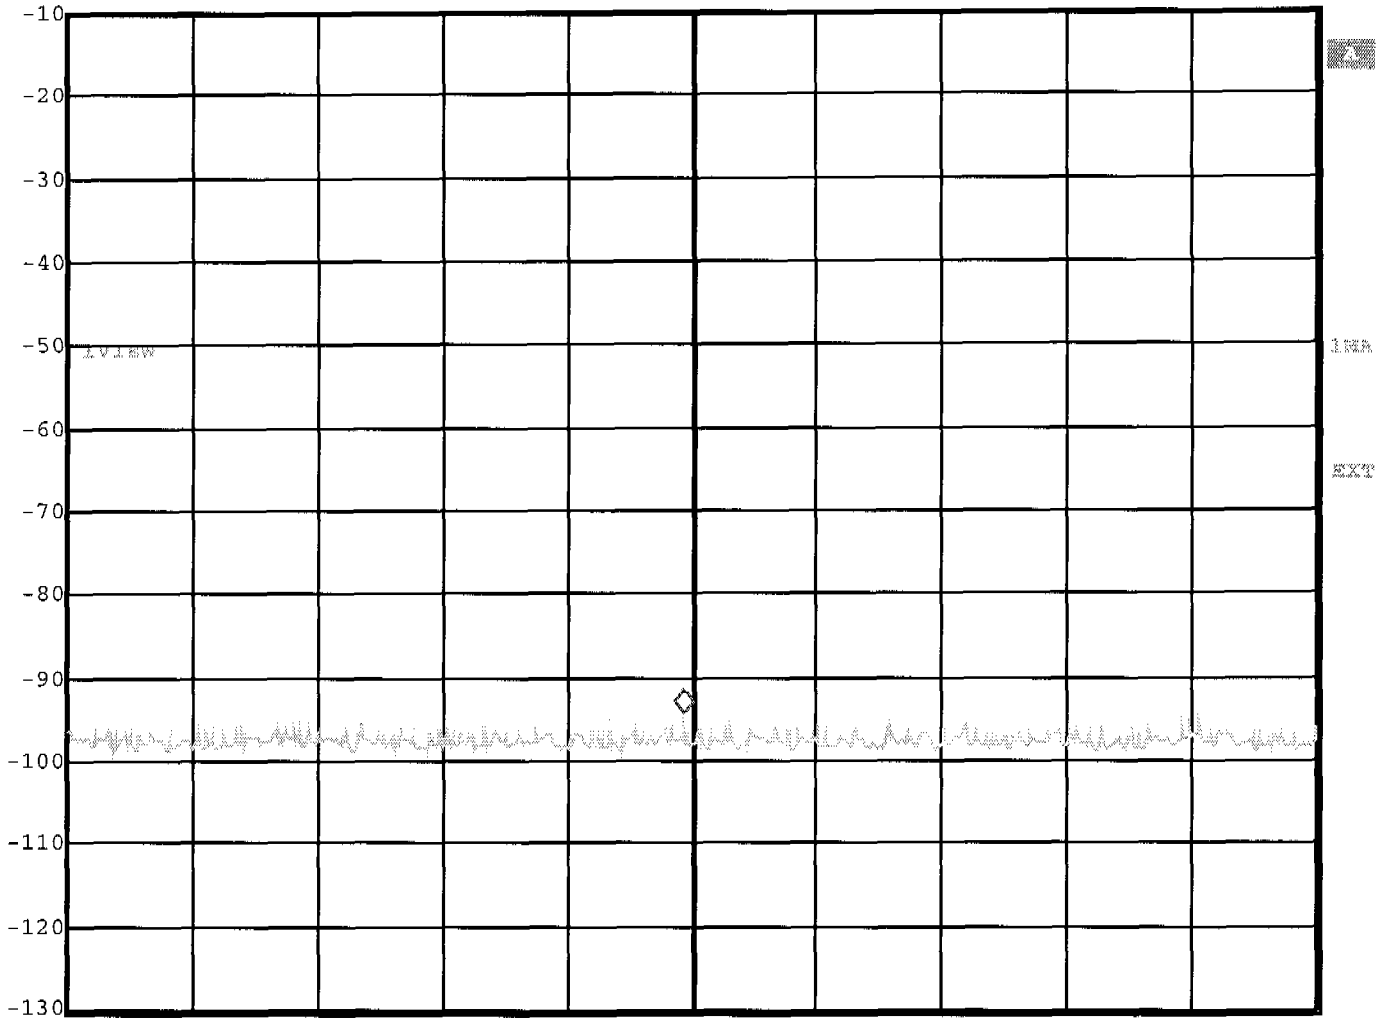

Start 869 MHz

2.5 MHz/

Stop 894 MHz


Title: Model: EB-G60U
Comment A: Emissions in Receiver Critical Band Channel 189
Date: 7.MAR.2003 15:06:33



Ref Lvl
-10 dBm

Freq: 890.543 MHz
Pmax: -89,091 dBm

RBW 30 kHz RF Att 0 dB
VBW 30 kHz
SWT 70 ms Unit dBm

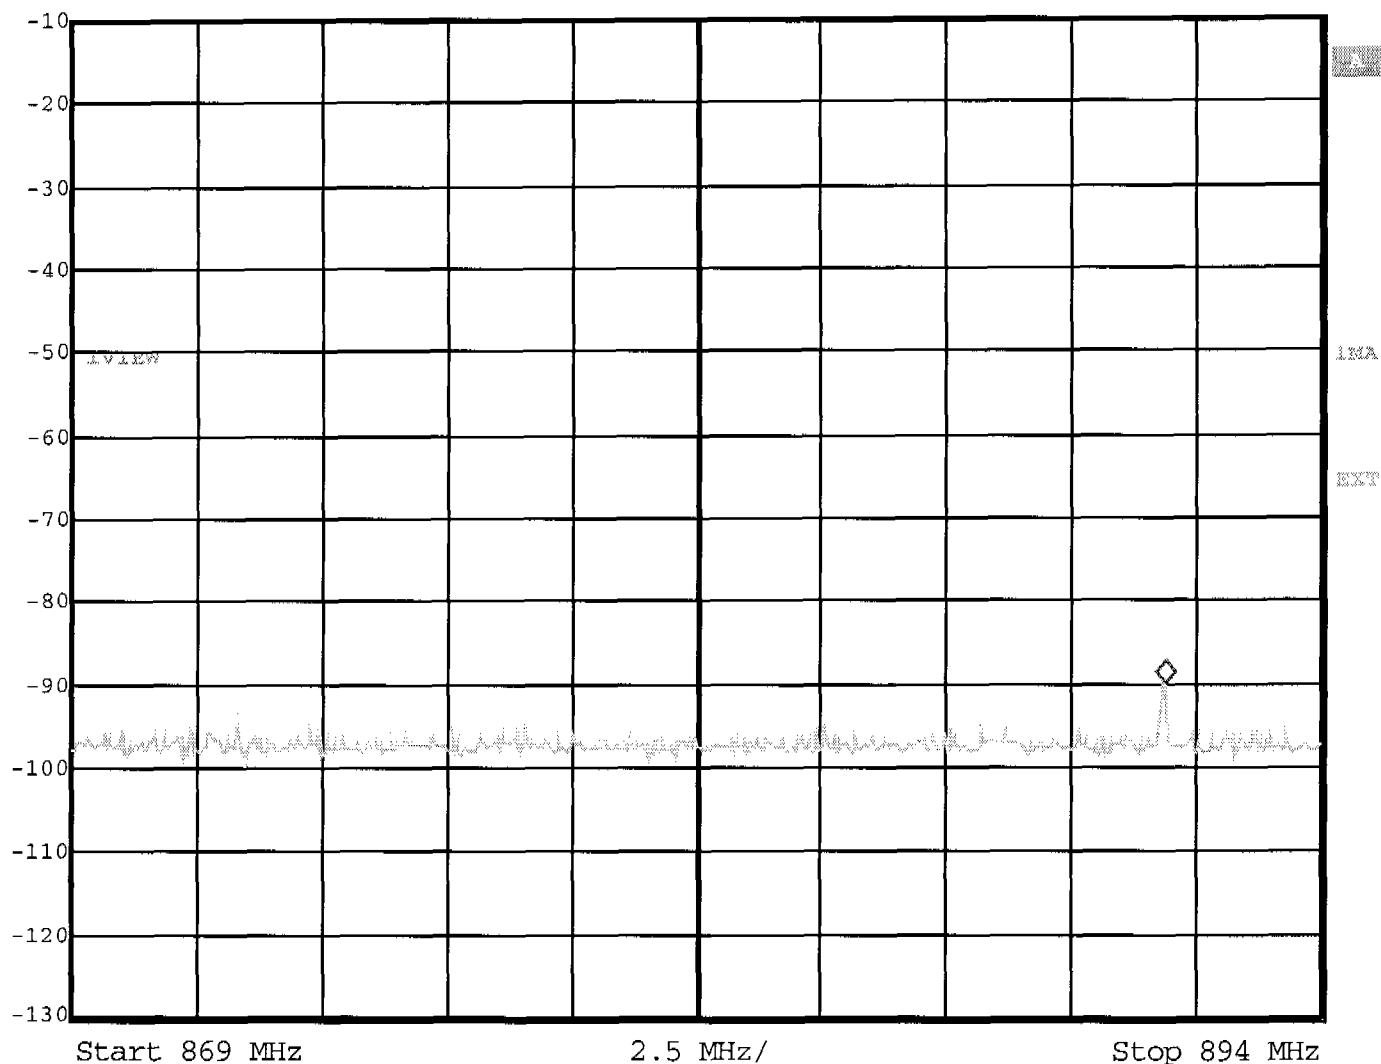

Title: Model: EB-G60U
Comment A: Emissions in Receiver Critical Band Channel 251
Date: 7.MAR.2003 15:07:45

Appendix I


Out of Band Emission at Antenna Terminals Mobile Emissions In Base
Frequency Range

Appendix J

Field Strenght of Spurious Radiation




Marker 1 [T1] RBW 3 kHz RF Att 50 dB
Ref Lvl 28.63 dBm VBW 3 kHz
35 dBm 1.90963868 GHz SWT 560 ms Unit dBm

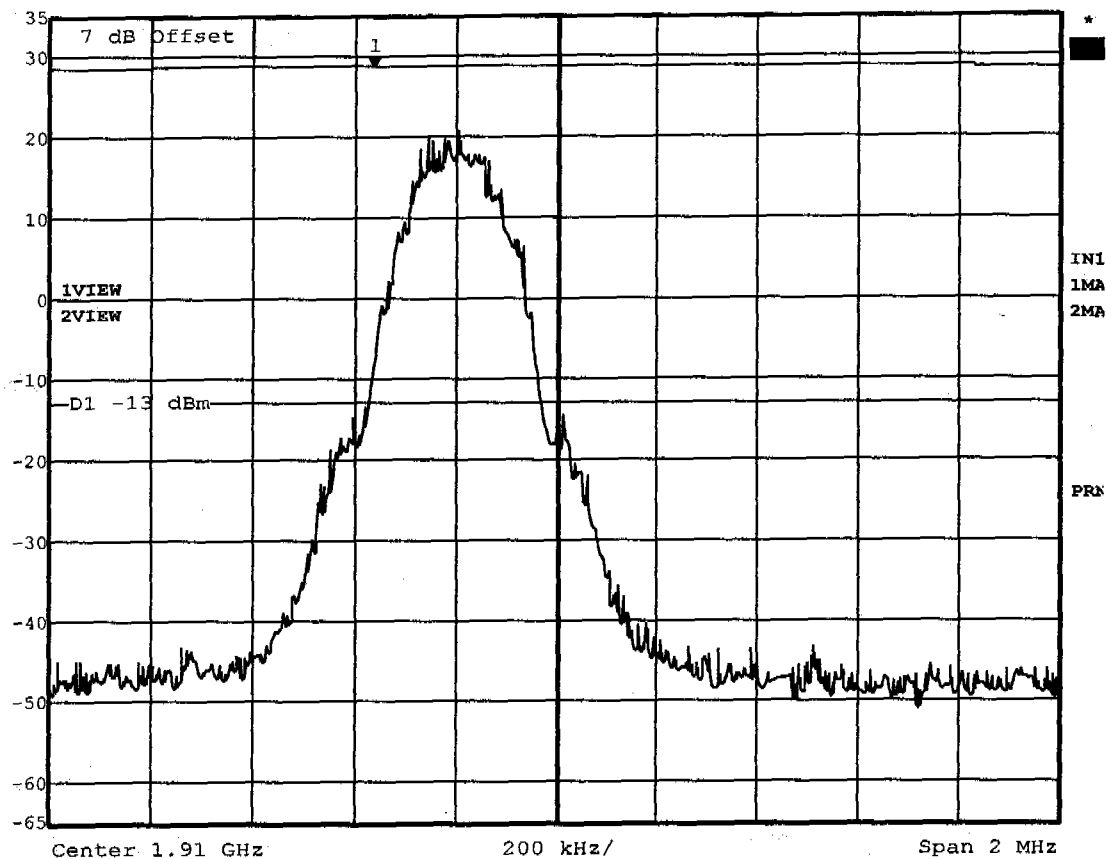

Title: Model:EB-G60U
Comment A: Lower Band Edge
Date: 10.FEB.2003 17:11:40




Marker 1 [T1] RBW 3 kHz RF Att 50 dB
Ref Lvl 29.18 dBm VBW 3 kHz
35 dBm 1.85020641 GHz SWT 560 ms Unit dBm

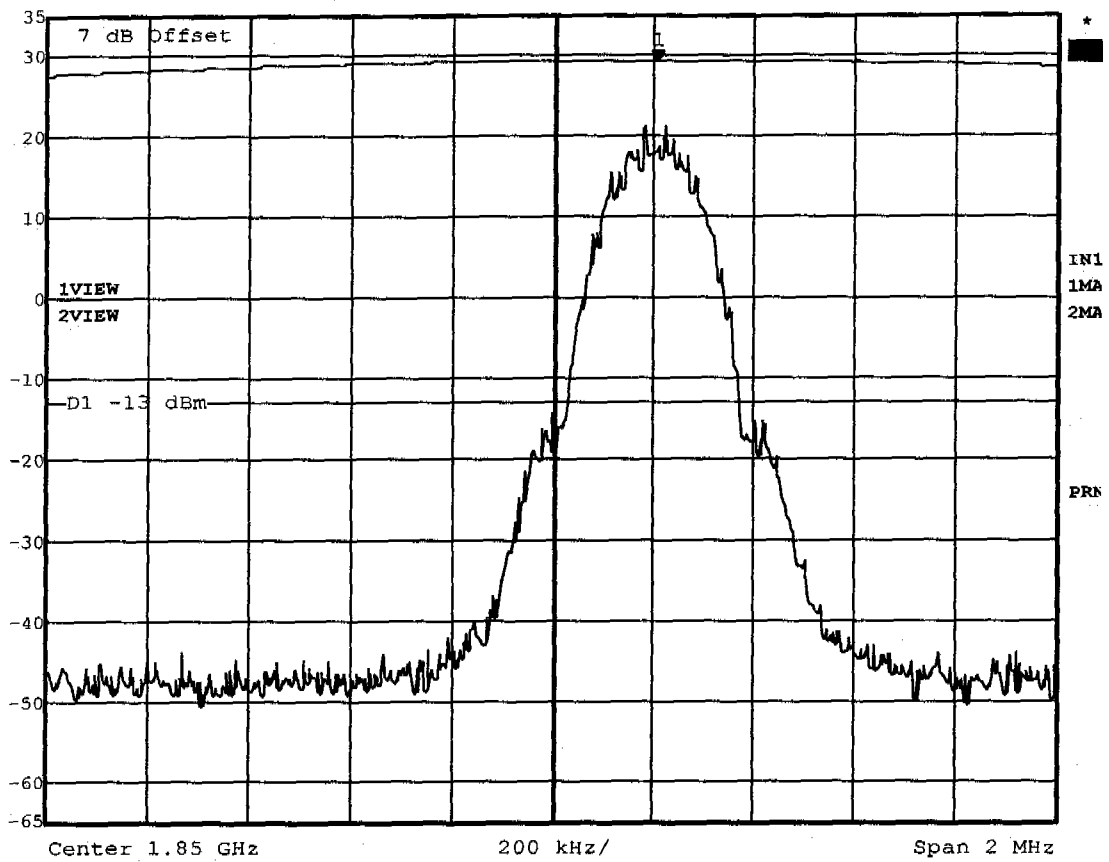

Title: Model:EB-G60U
Comment A: Higher Band Edge
Date: 10.FEB.2003 17:15:20


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

EUT / Model: GPRS Dual Band Handset / EB-G60U
Channel: 512
Approval Holder: Compal Communications Inc.
Test Site / Operator: ETS / Mr. F.Schulz
Temperature/ Voltage: 23°C / Unom. : 3.8 VDC
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 78.544MHz, Pmax: -50.89dBm, RBW: 1MHz

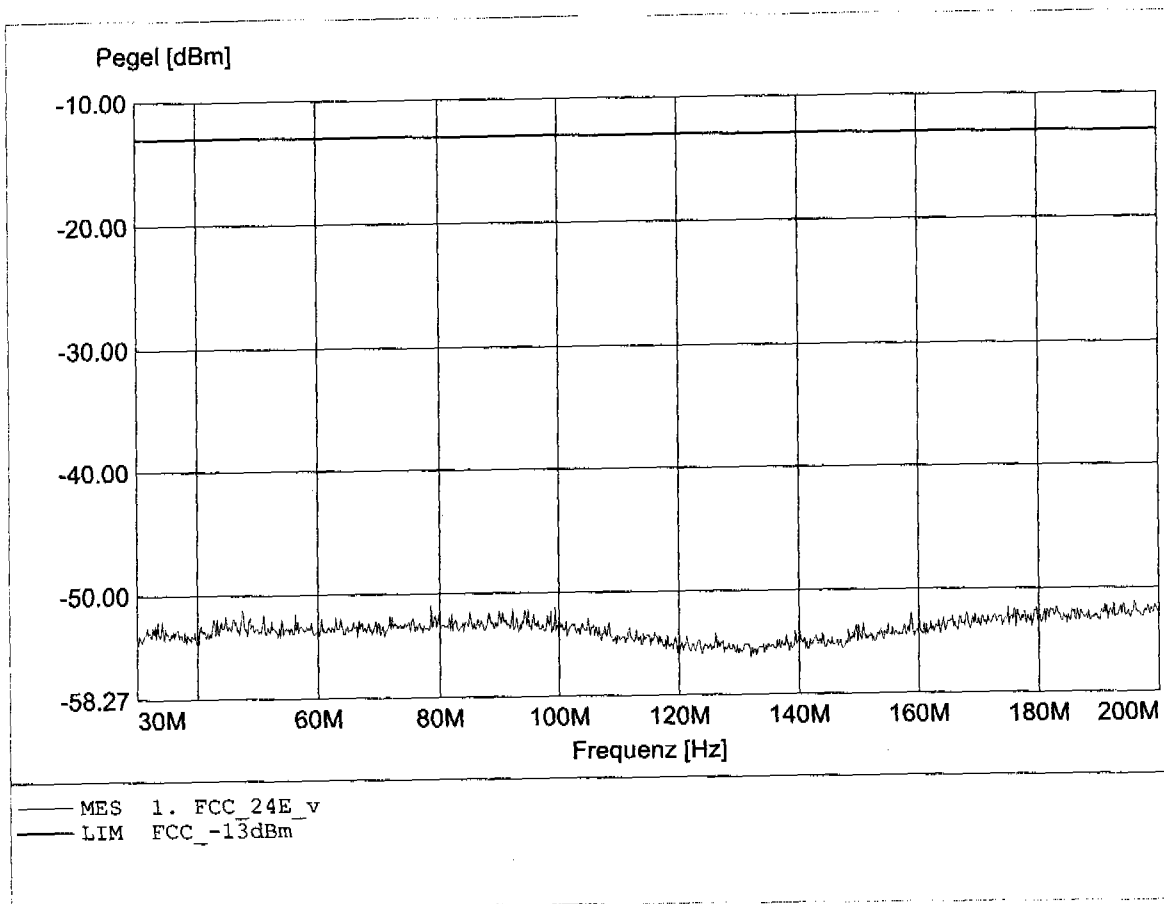


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

EUT / Model: GPRS Dual Band Handset / EB-G60U
Channel: 512
Approval Holder: Compal Communications Inc.
Test Site / Operator: ETS / Mr. F.Schulz
Temperature/ Voltage: 23°C / Unom. : 3.8 VDC
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 88.178MHz, Pmax: -48.61dBm, RBW: 1MHz

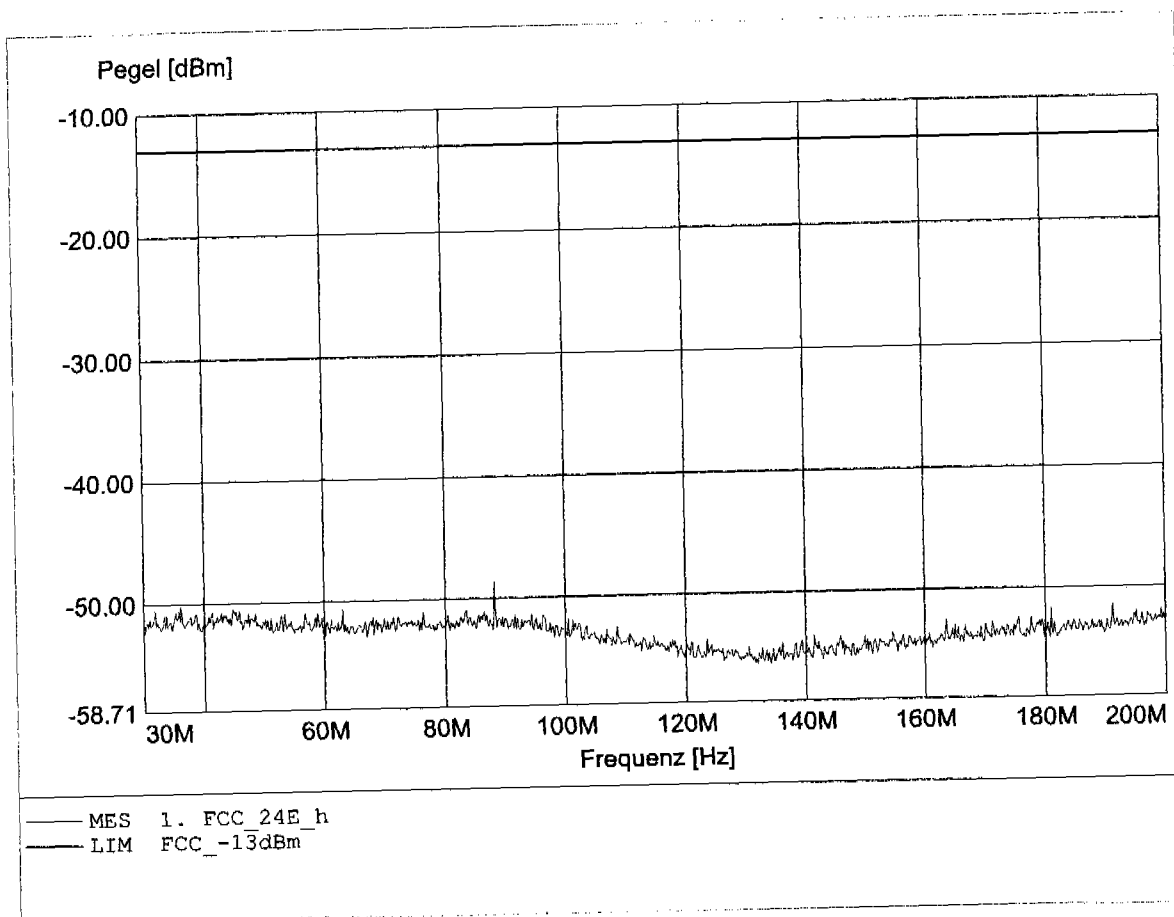


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

EUT / Model: GPRS Dual Band Handset / EB-G60U
Channel: 512
Approval Holder: Compal Communications Inc.
Test Site / Operator: ETS / Mr. F.Schulz
Temperature/ Voltage: 23°C / Unom. : 3.8 VDC
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL 223
Comment 2: Freq: 988.444MHz, Pmax: -38.17dBm, RBW: 1MHz

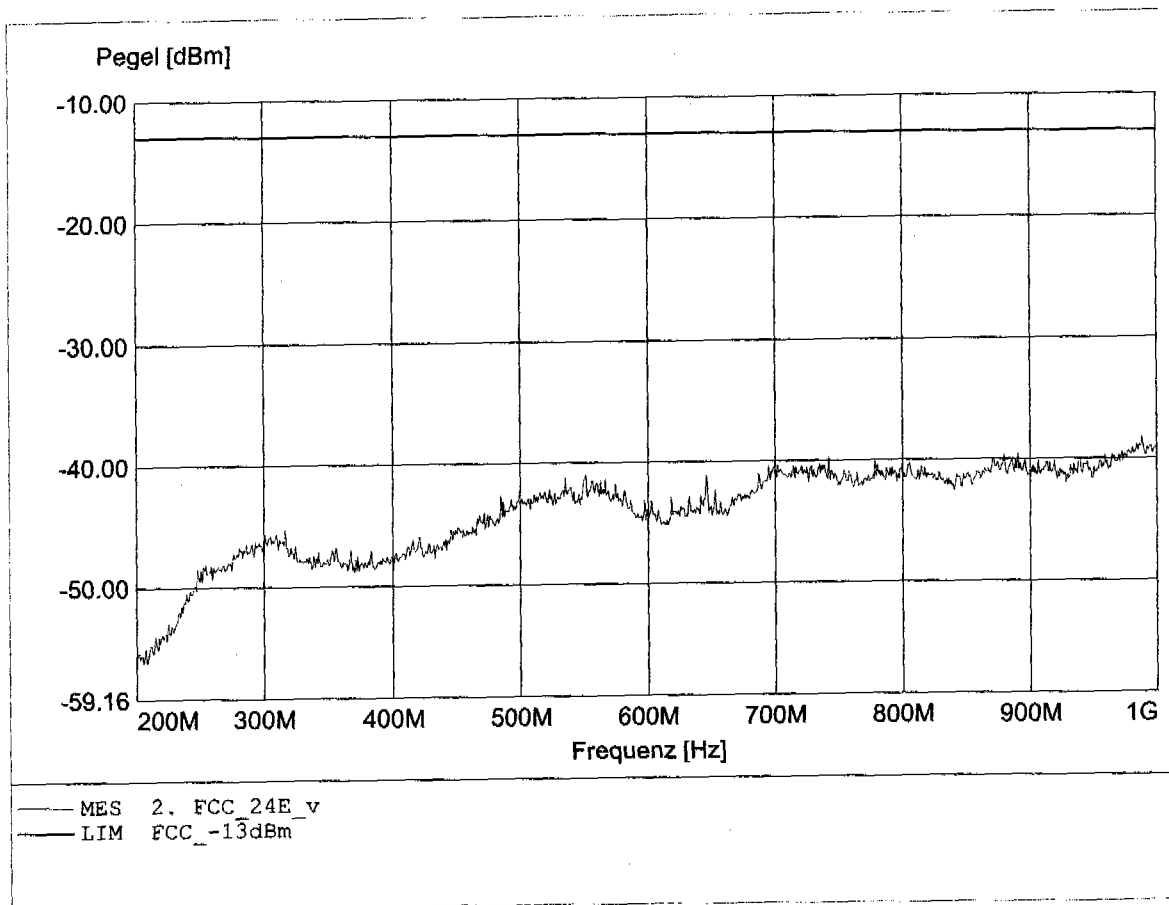


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

EUT / Model: GPRS Dual Band Handset / EB-G60U
Channel: 512
Approval Holder: Compal Communications Inc.
Test Site / Operator: ET5 / Mr. F.Schulz
Temperature/ Voltage: 23°C / Unom. : 3.8 VDC
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL 223
Comment 2: Freq: 848.889MHz, Pmax: -35.22dBm, RBW: 1MHz

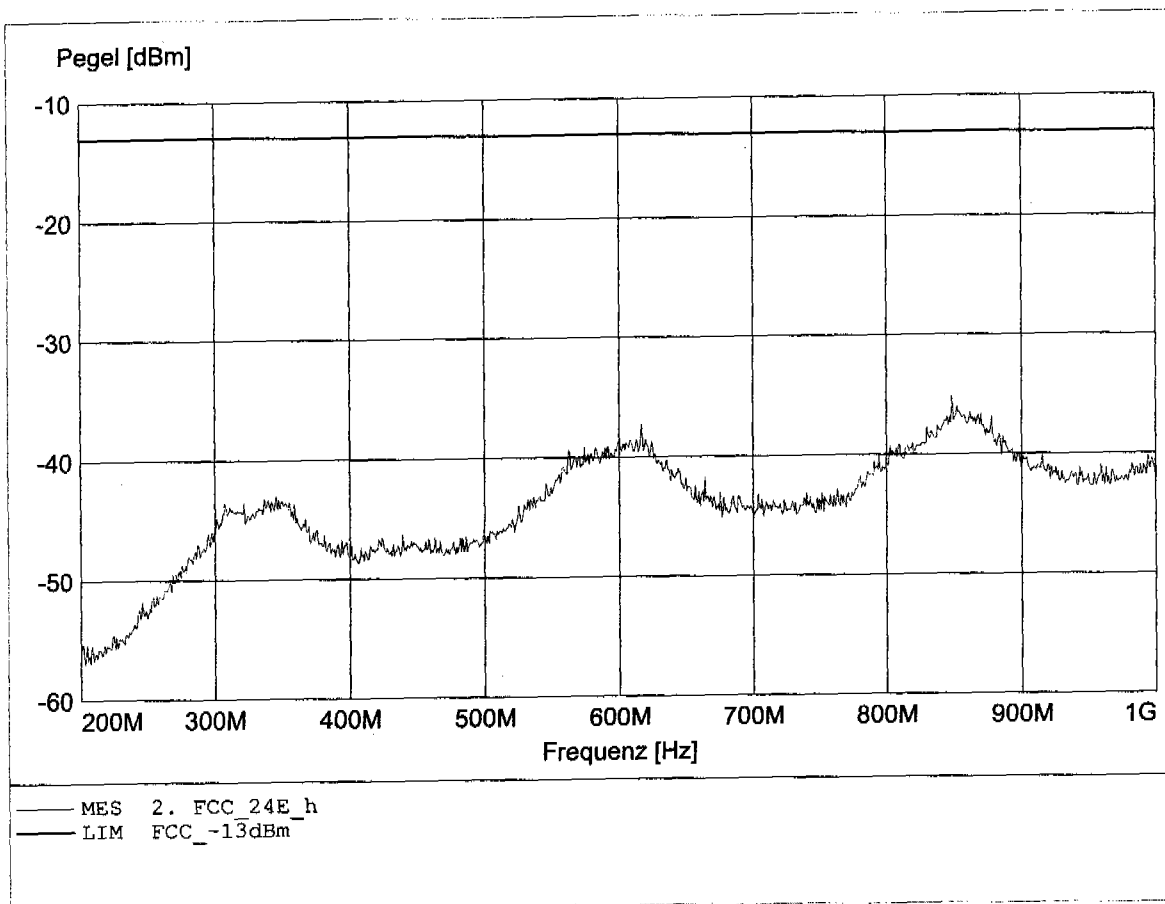


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

EUT / Model: GPRS Dual Band Handset / EB-G60U
Channel: 512
Approval Holder: Compal Communications Inc.
Test Site / Operator: ETS / Mr. F.Schulz
Temperature/ Voltage: 23°C / Unom. : 3.8 VDC
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq: 3.956GHz, Pmax: -21.40dBm, RBW: 1MHz/3kHz

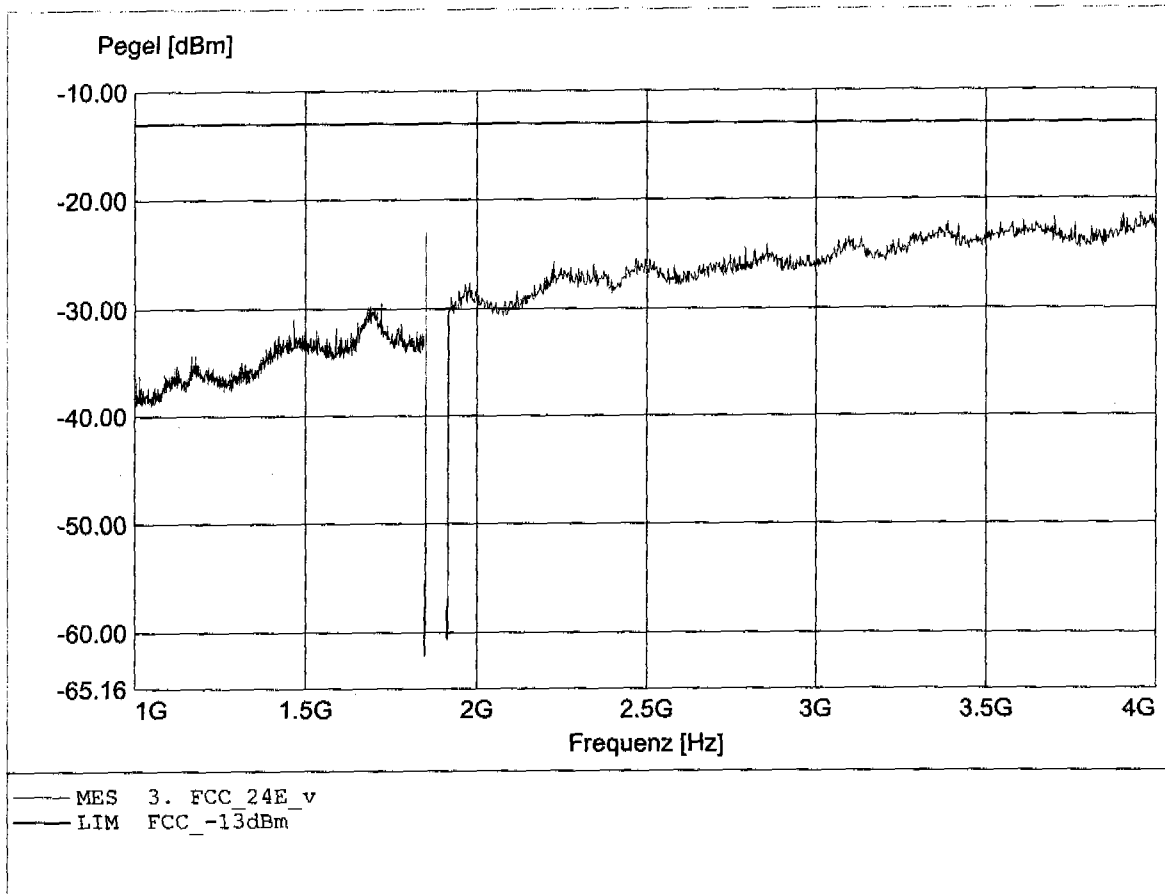


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

EUT / Model: GPRS Dual Band Handset / EB-G60U
Channel: 512
Approval Holder: Compal Communications Inc.
Test Site / Operator: ETS / Mr. F.Schulz
Temperature/ Voltage: 23°C / Unom. : 3.8 VDC
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq: 1.850GHz, Pmax: -20.39dBm, RBW: 1MHz/3kHz

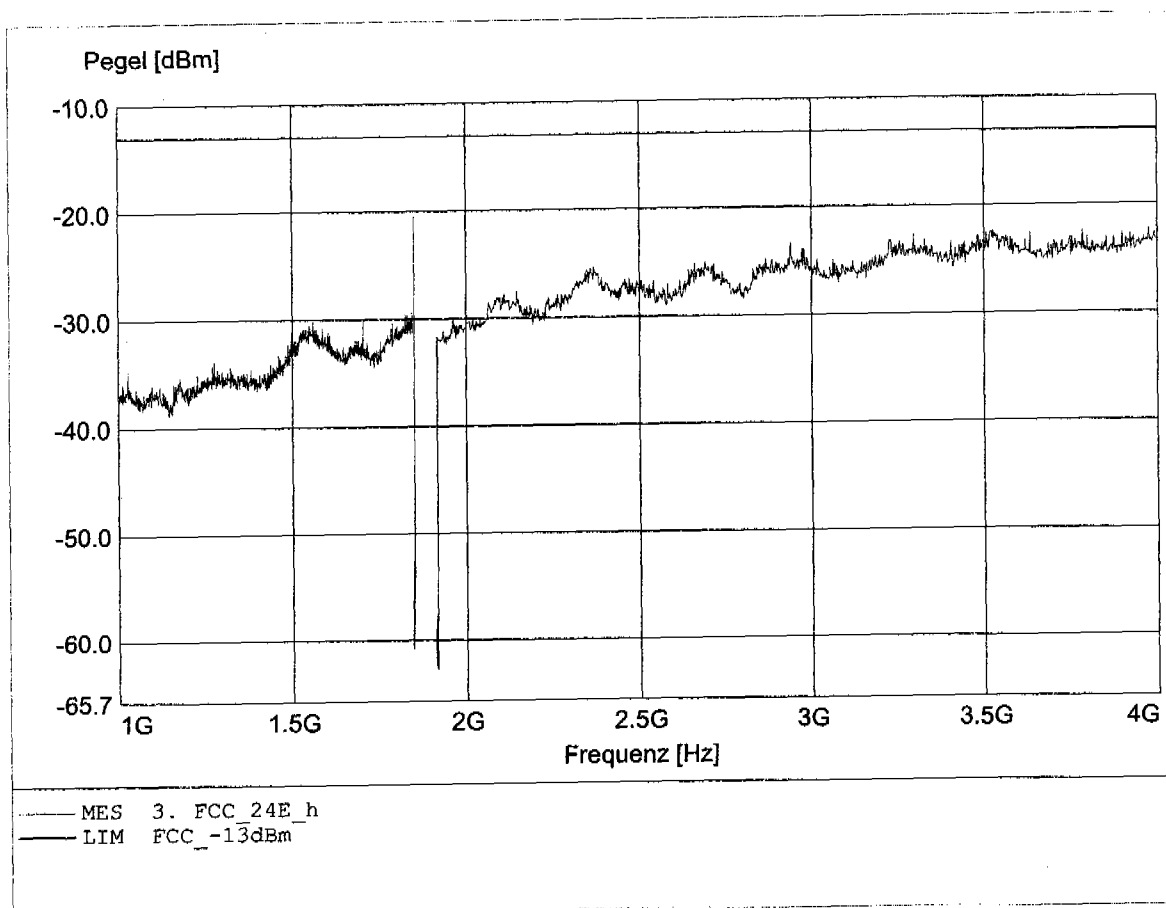


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

EUT / Model: GPRS Dual Band Handset / EB-G60U
Channel: 512
Approval Holder: Compal Communications Inc.
Test Site / Operator: ETS / Mr. F.Schulz
Temperature/ Voltage: 23°C / Unom. : 3.8 VDC
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 7.400GHz, Pmax: -33.11dBm, RBW: 1MHz

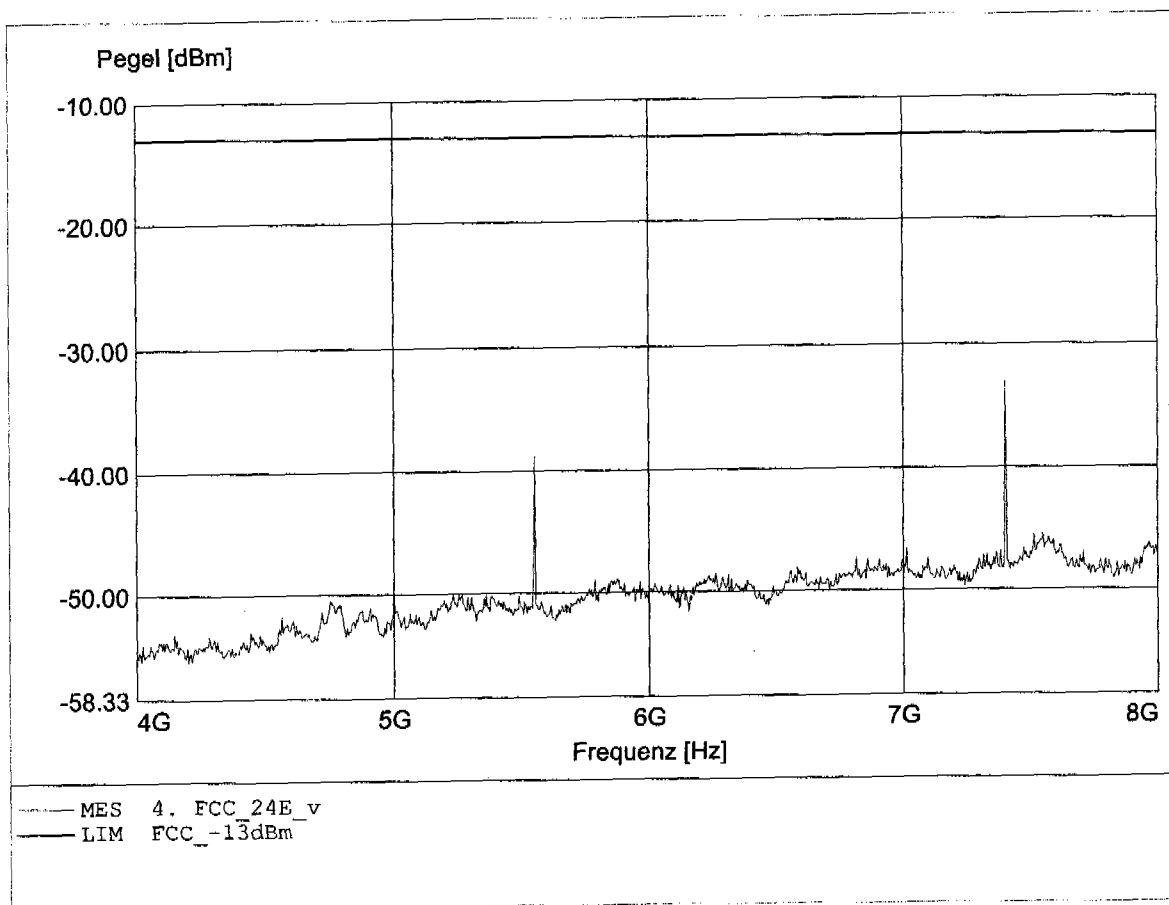


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

EUT / Model: GPRS Dual Band Handset / EB-G60U
Channel: 512
Approval Holder: Compal Communications Inc.
Test Site / Operator: ETS / Mr. F.Schulz
Temperature/ Voltage: 23°C / Unom. : 3.8 VDC
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 7.400GHz, Pmax: -32.02dBm, RBW: 1MHz

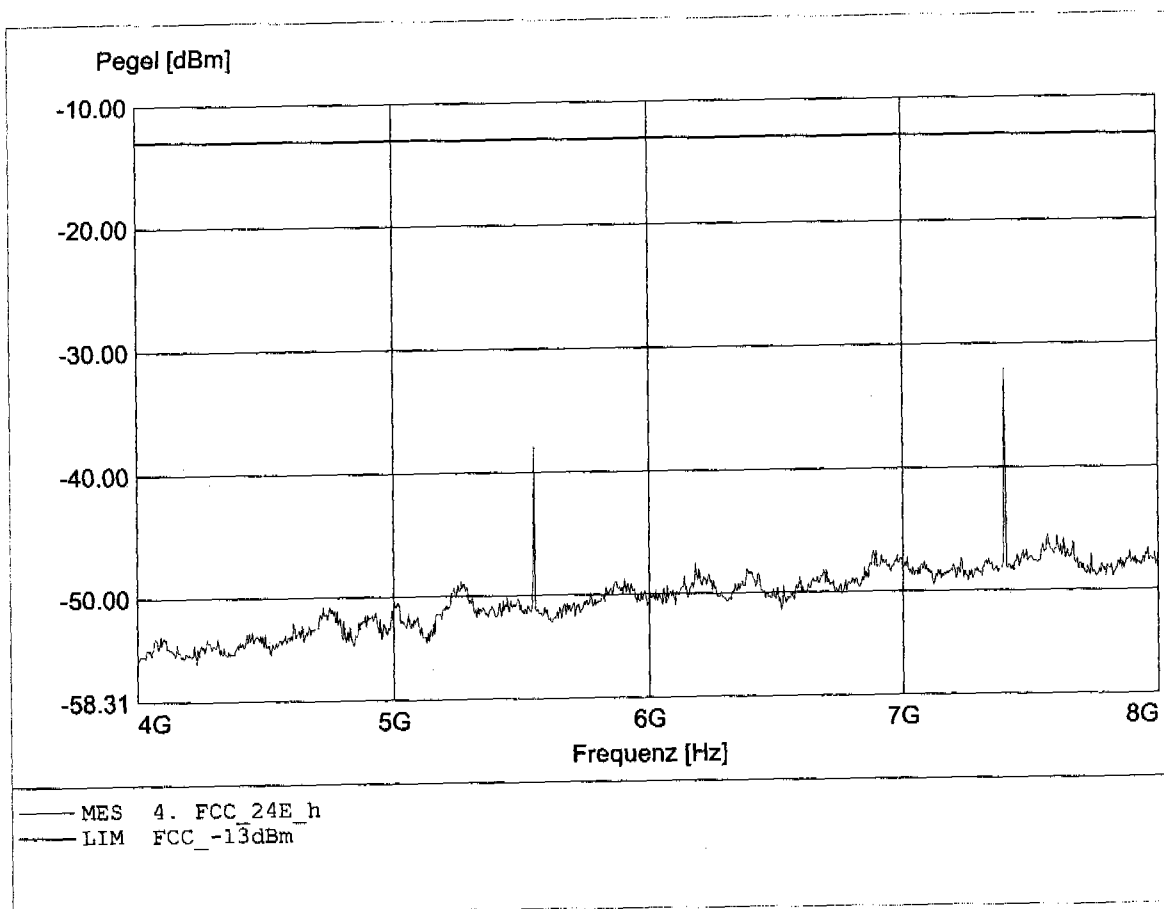


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

EUT / Model: GPRS Dual Band Handset / EB-G60U
Channel: 512
Approval Holder: Compal Communications Inc.
Test Site / Operator: ETS / Mr. F.Schulz
Temperature/ Voltage: 23°C / Unom. : 3.8 VDC
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 9.253GHz, Pmax: -31.20dBm, RBW: 1MHz

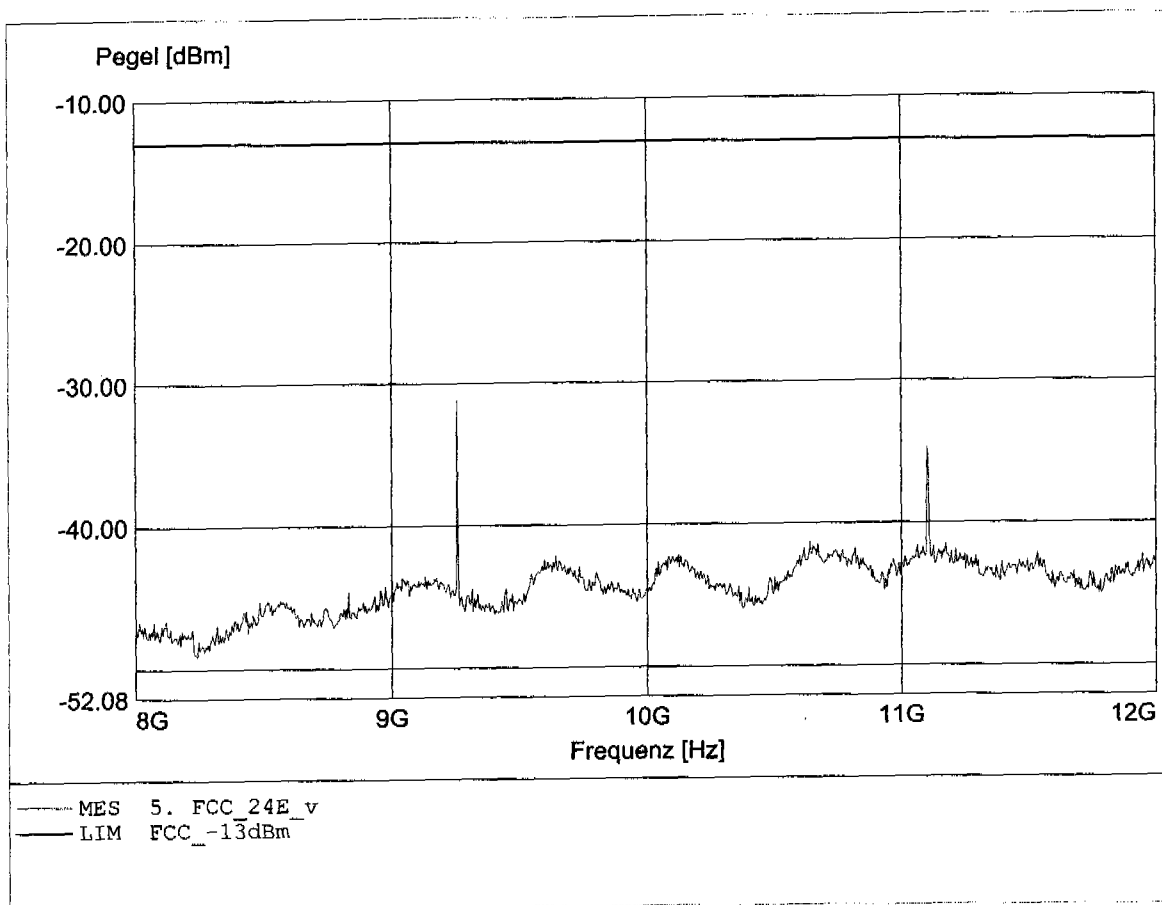


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

EUT / Model: GPRS Dual Band Handset / EB-G60U
Channel: 512
Approval Holder: Compal Communications Inc.
Test Site / Operator: ETS / Mr. F.Schulz
Temperature/ Voltage: 23°C / Unom. : 3.8 VDC
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 11.102GHz, Pmax: -19.25dBm, RBW: 1MHz

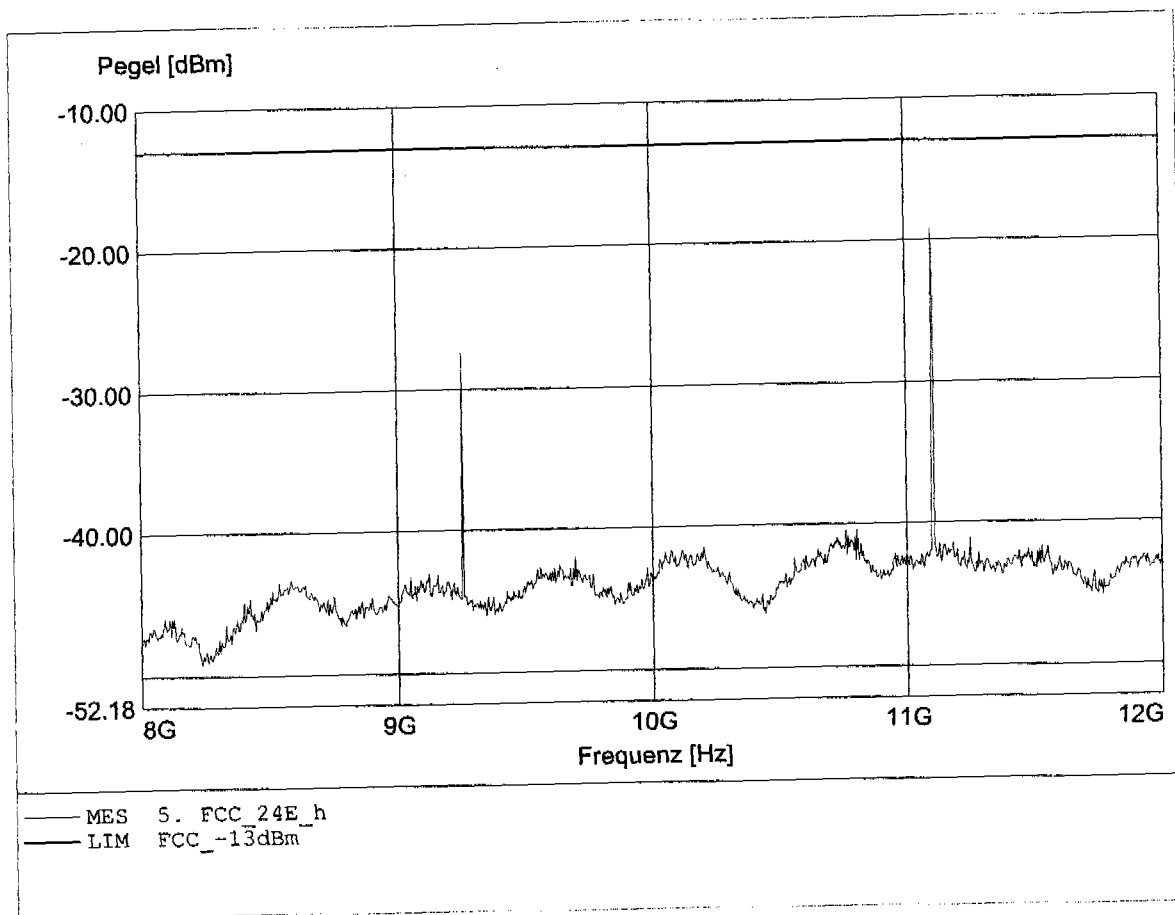


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

EUT / Model: GPRS Dual Band Handset / EB-G60U
Channel: 512
Approval Holder: Compal Communications Inc.
Test Site / Operator: ETS / Mr. F.Schulz
Temperature/ Voltage: 23°C / Unom. : 3.8 VDC
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 12.953GHz, Pmax: -29.09dBm, RBW: 1MHz

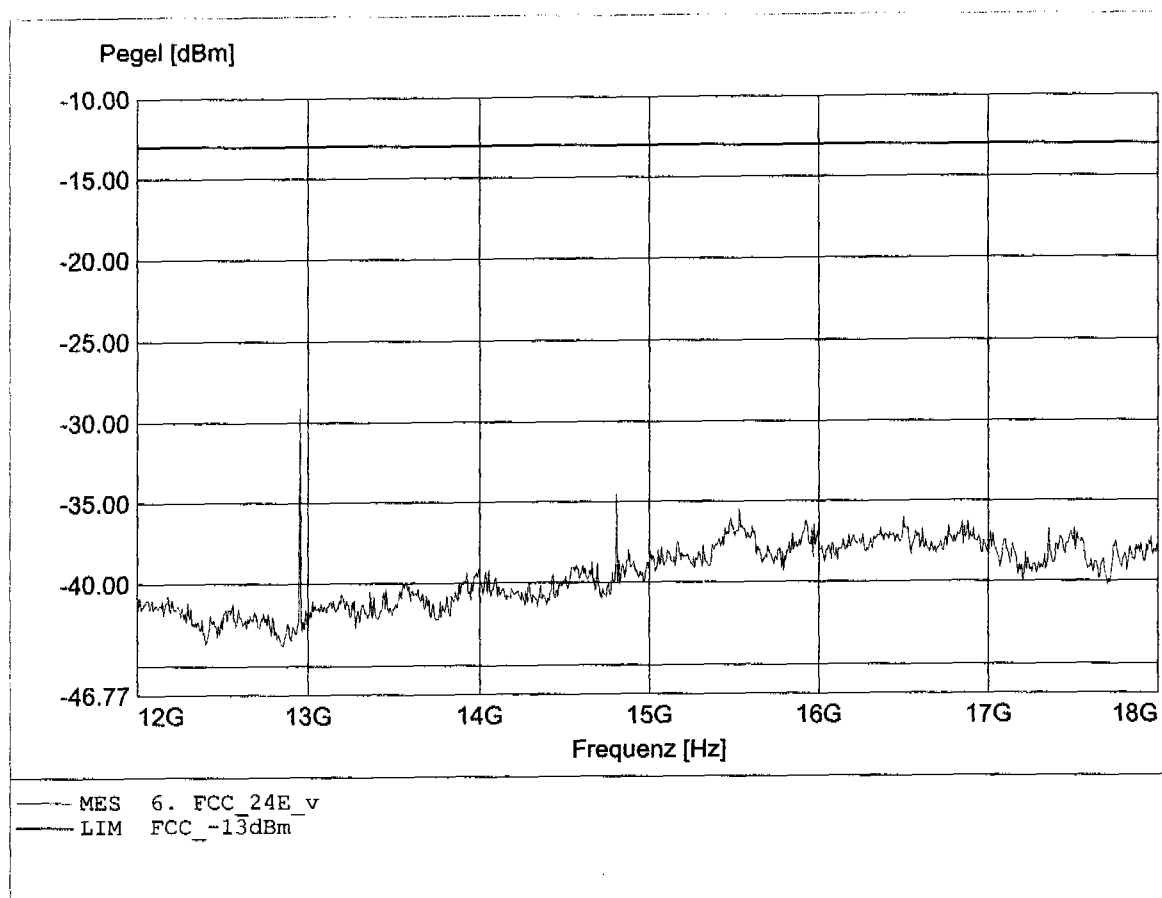


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

EUT / Model: GPRS Dual Band Handset / EB-G60U
Channel: 512
Approval Holder: Compal Communications Inc.
Test Site / Operator: ETS / Mr. F.Schulz
Temperature/ Voltage: 23°C / Unom. : 3.8 VDC
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 12.953GHz, Pmax: -23.69dBm, RBW: 1MHz

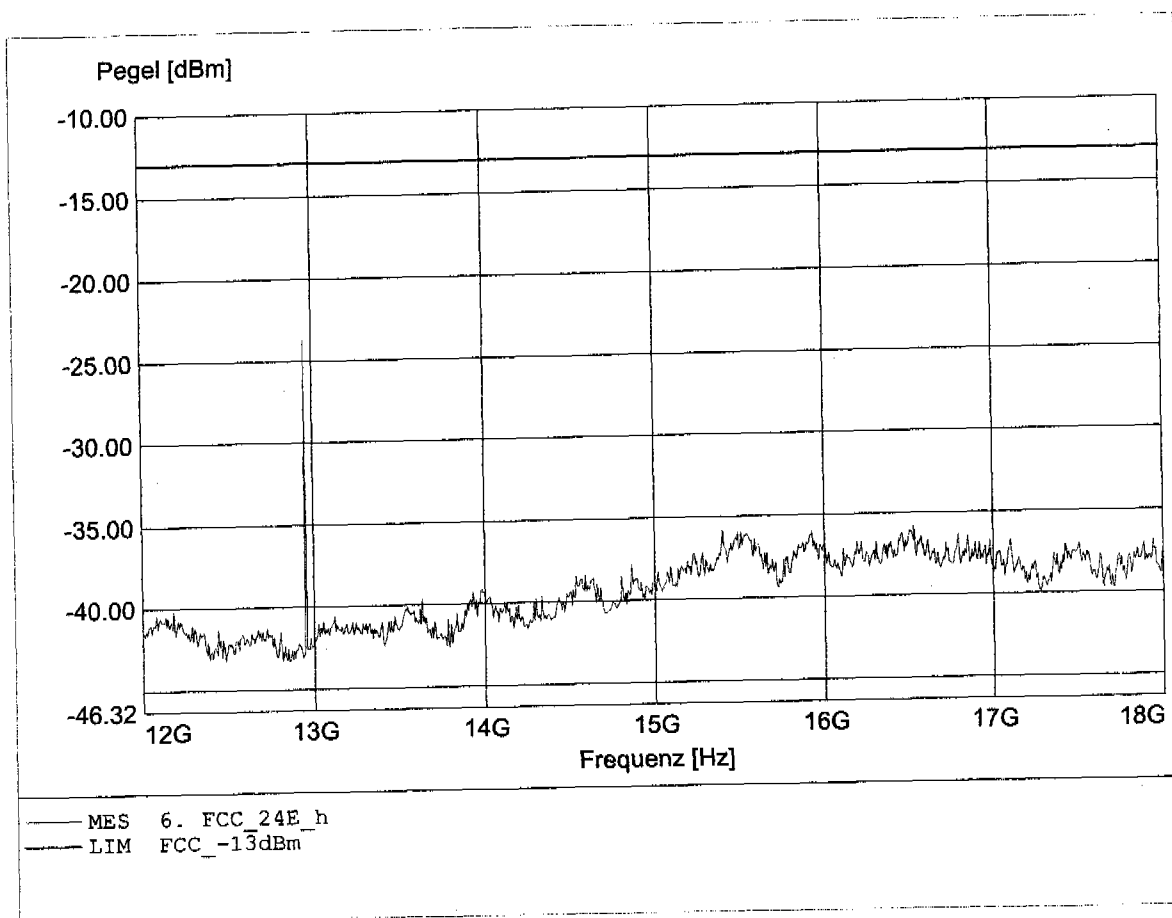


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

EUT / Model: GPRS Dual Band Handset / EB-G60U
Channel: 512
Approval Holder: Compal Communications Inc.
Test Site / Operator: ETS / Mr. F.Schulz
Temperature/ Voltage: 23°C / Unom. : 3.8 VDC
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 26.472GHz, Pmax: -28.26dBm, RBW: 1MHz

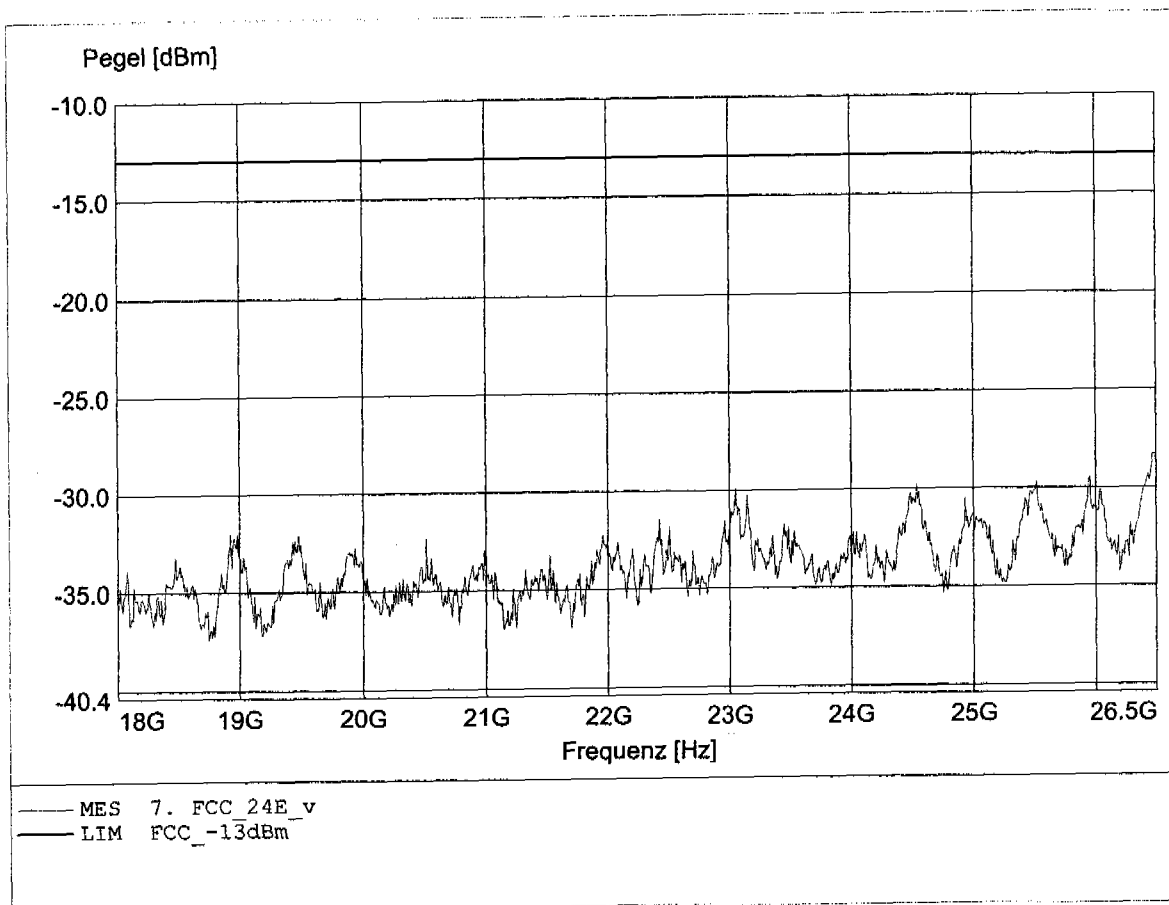


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

EUT / Model: GPRS Dual Band Handset / EB-G60U
Channel: 512
Approval Holder: Compal Communications Inc.
Test Site / Operator: ETS / Mr. F.Schulz
Temperature/ Voltage: 23°C / Unom. : 3.8 VDC
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 26.415GHz, Pmax: -29.34dBm, RBW: 1MHz

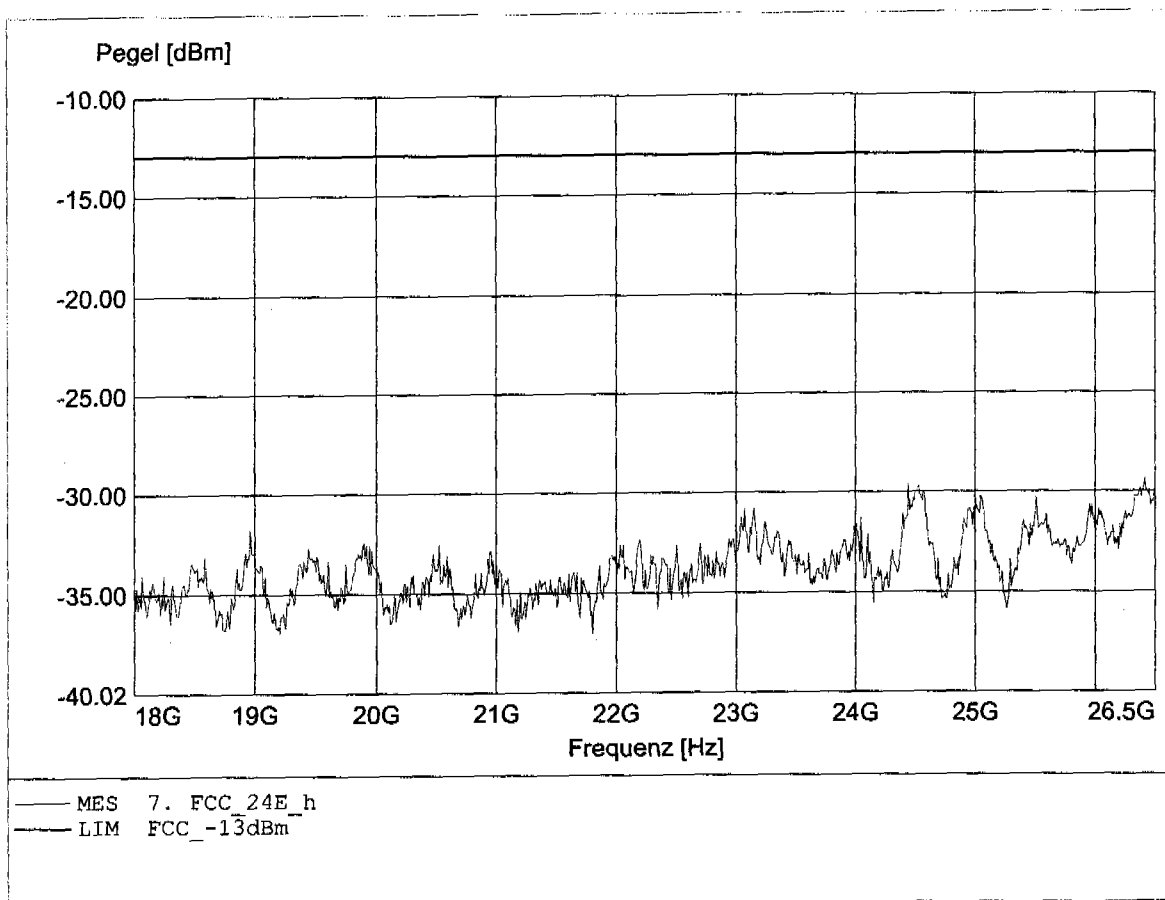


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

EUT / Model: GPRS Dual Band Handset / EB-G60U
Channel: 661
Approval Holder: Compal Communications Inc.
Test Site / Operator: ETS / Mr. F.Schulz
Temperature/ Voltage: 23°C / Unom. : 3.8 VDC
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 197.544MHz, Pmax: -50.92dBm, RBW: 1MHz

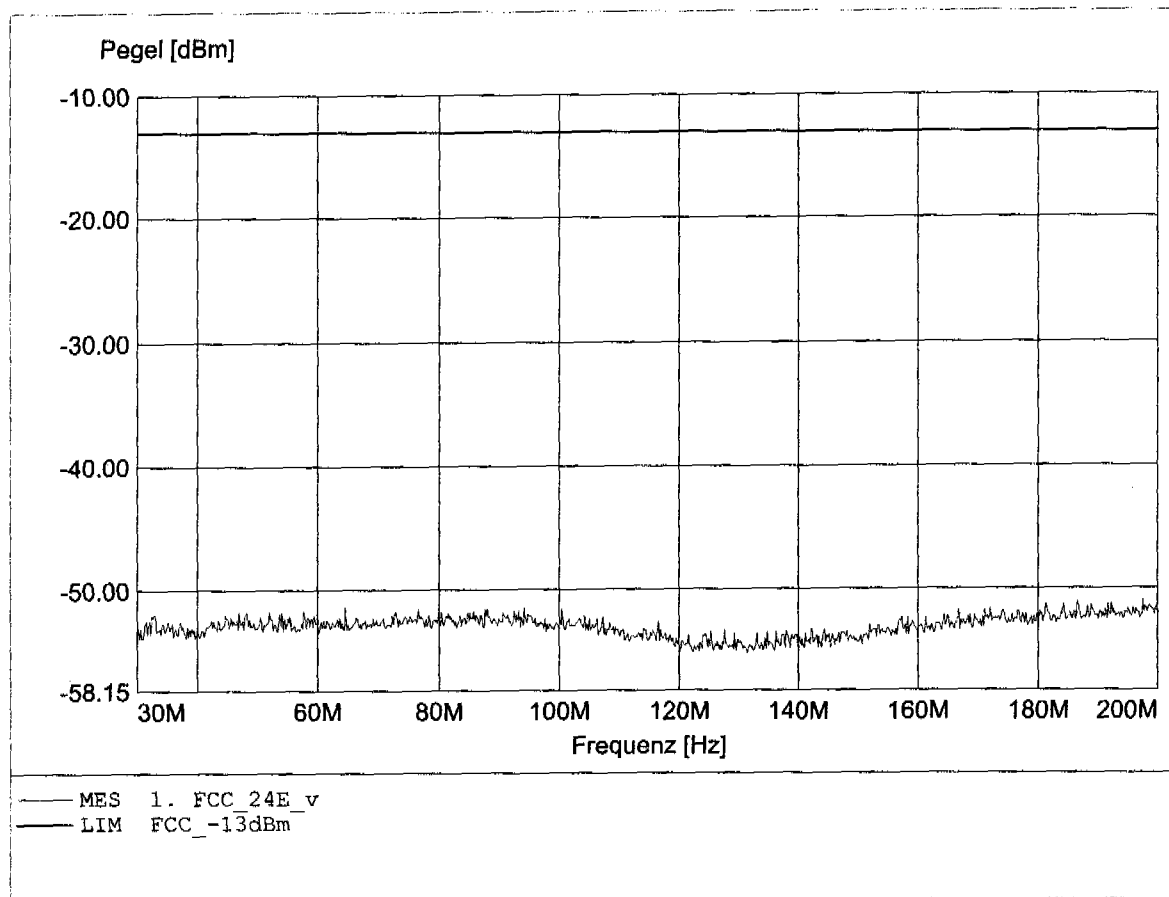


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

EUT / Model: GPRS Dual Band Handset / EB-G60U
Channel: 661
Approval Holder: Compal Communications Inc.
Test Site / Operator: ETS / Mr. F.Schulz
Temperature/ Voltage: 23°C / Unom. : 3.8 VDC
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 35.856MHz, Pmax: -50.30dBm, RBW: 1MHz

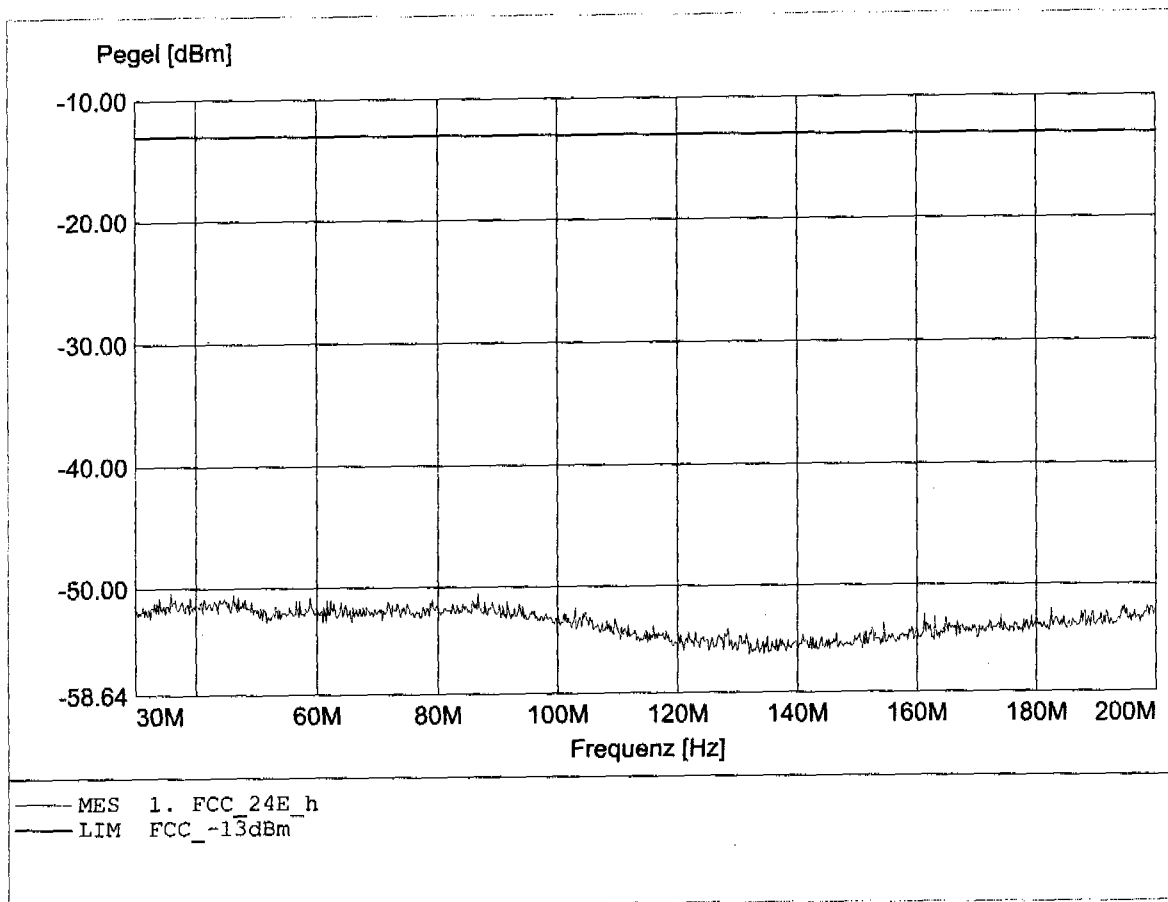


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

EUT / Model: GPRS Dual Band Handset / EB-G60U
Channel: 661
Approval Holder: Compal Communications Inc.
Test Site / Operator: ETS / Mr. F.Schulz
Temperature/ Voltage: 23°C / Unom. : 3.8 VDC
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL 223
Comment 2: Freq: 997.333MHz, Pmax: -38.01dBm, RBW: 1MHz

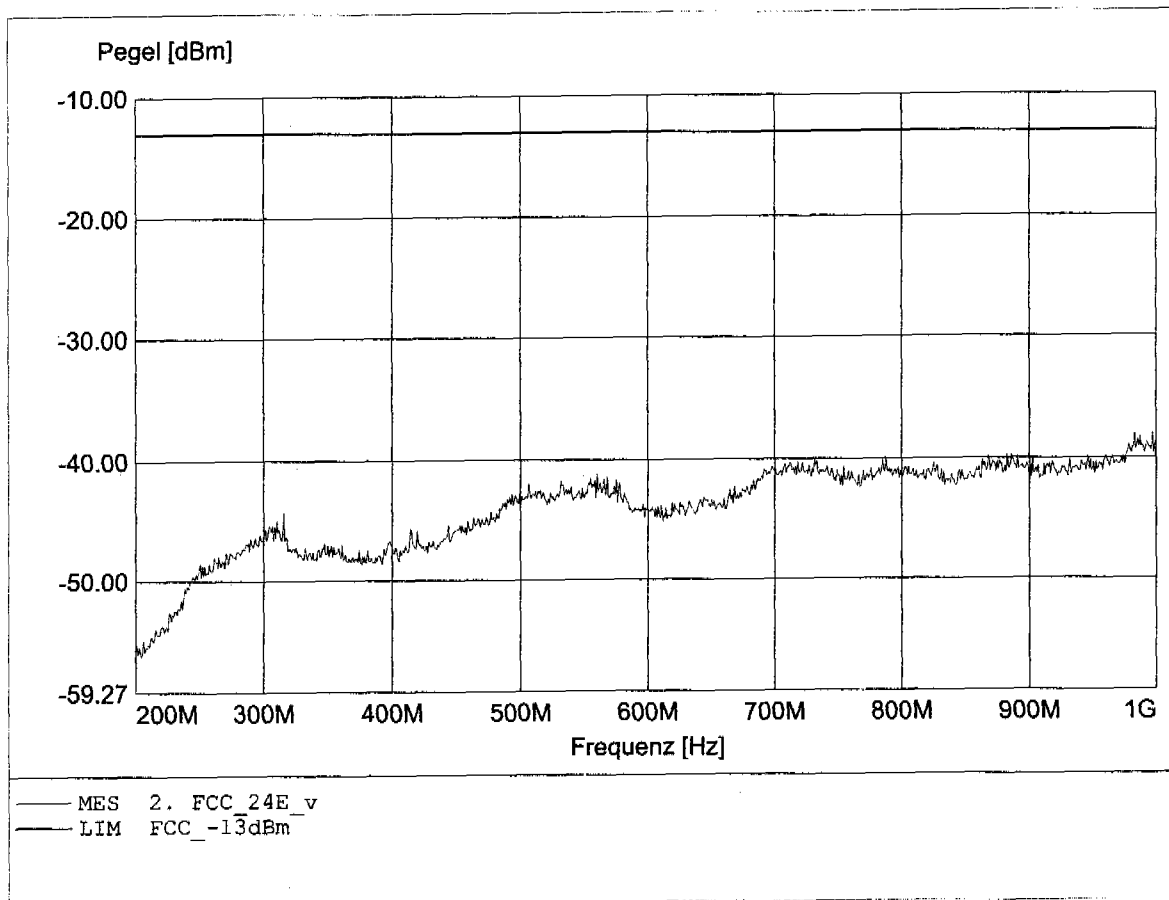


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

EUT / Model: GPRS Dual Band Handset / EB-G60U
Channel: 661
Approval Holder: Compal Communications Inc.
Test Site / Operator: ETS / Mr. F.Schulz
Temperature/ Voltage: 23°C / Unom. : 3.8 VDC
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL 223
Comment 2: Freq: 851.556MHz, Pmax: -35.88dBm, RBW: 1MHz

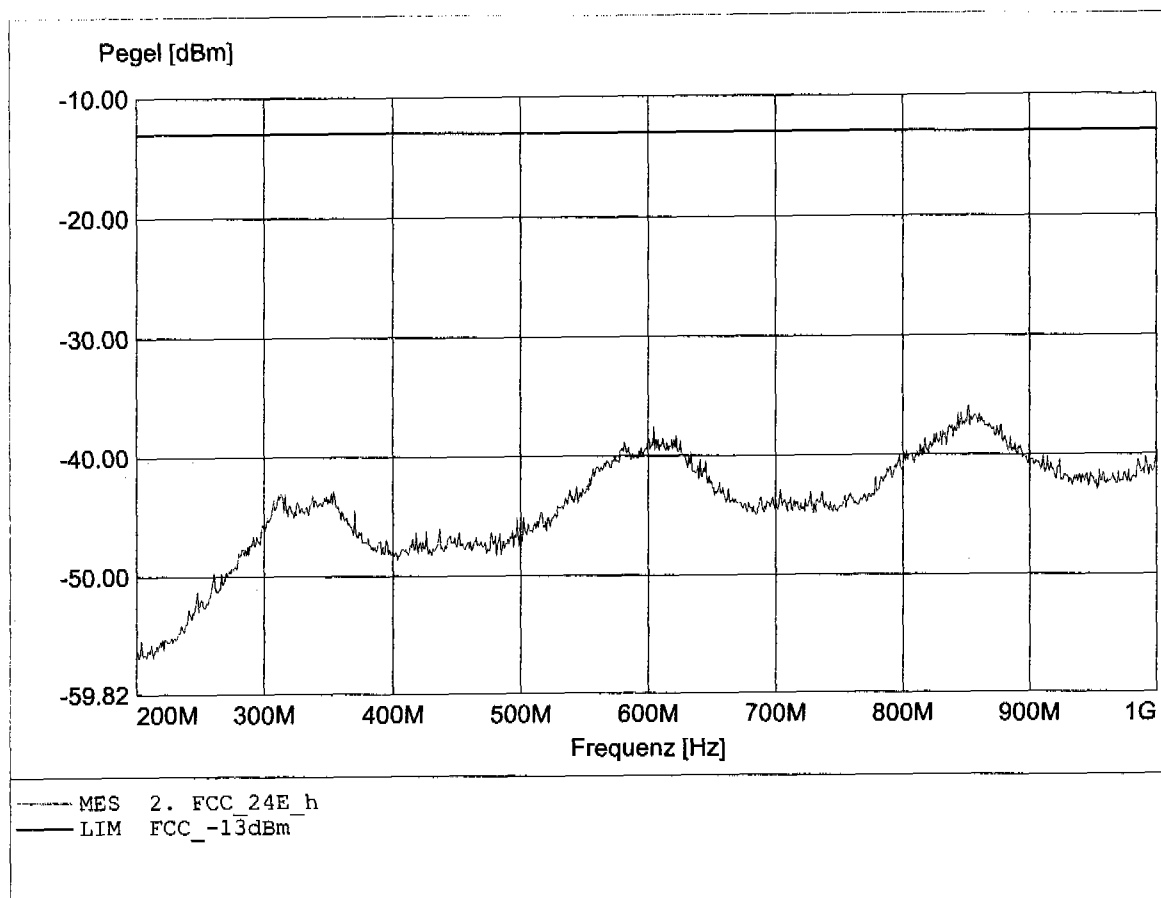


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

EUT / Model: GPRS Dual Band Handset / EB-G60U
Channel: 661
Approval Holder: Compal Communications Inc.
Test Site / Operator: ETS / Mr. F.Schulz
Temperature/ Voltage: 23°C / Unom. : 3.8 VDC
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq: 3.970GHz, Pmax: -21.24dBm, RBW: 1MHz/3kHz

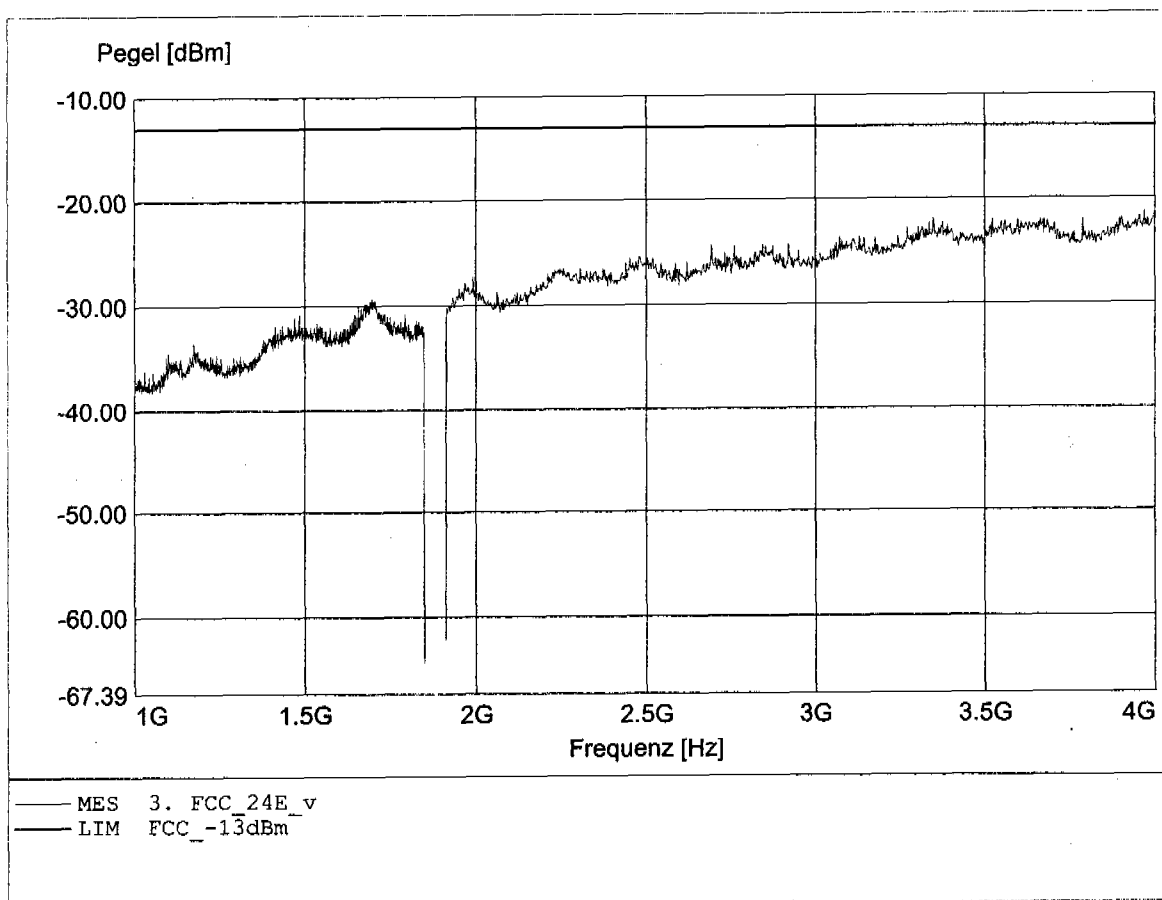


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

EUT / Model: GPRS Dual Band Handset / EB-G60U
Channel: 661
Approval Holder: Compal Communications Inc.
Test Site / Operator: ETS / Mr. F.Schulz
Temperature/ Voltage: 23°C / Unom. : 3.8 VDC
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq: 3.538GHz, Pmax: -21.10dBm, RBW: 1MHz/3kHz

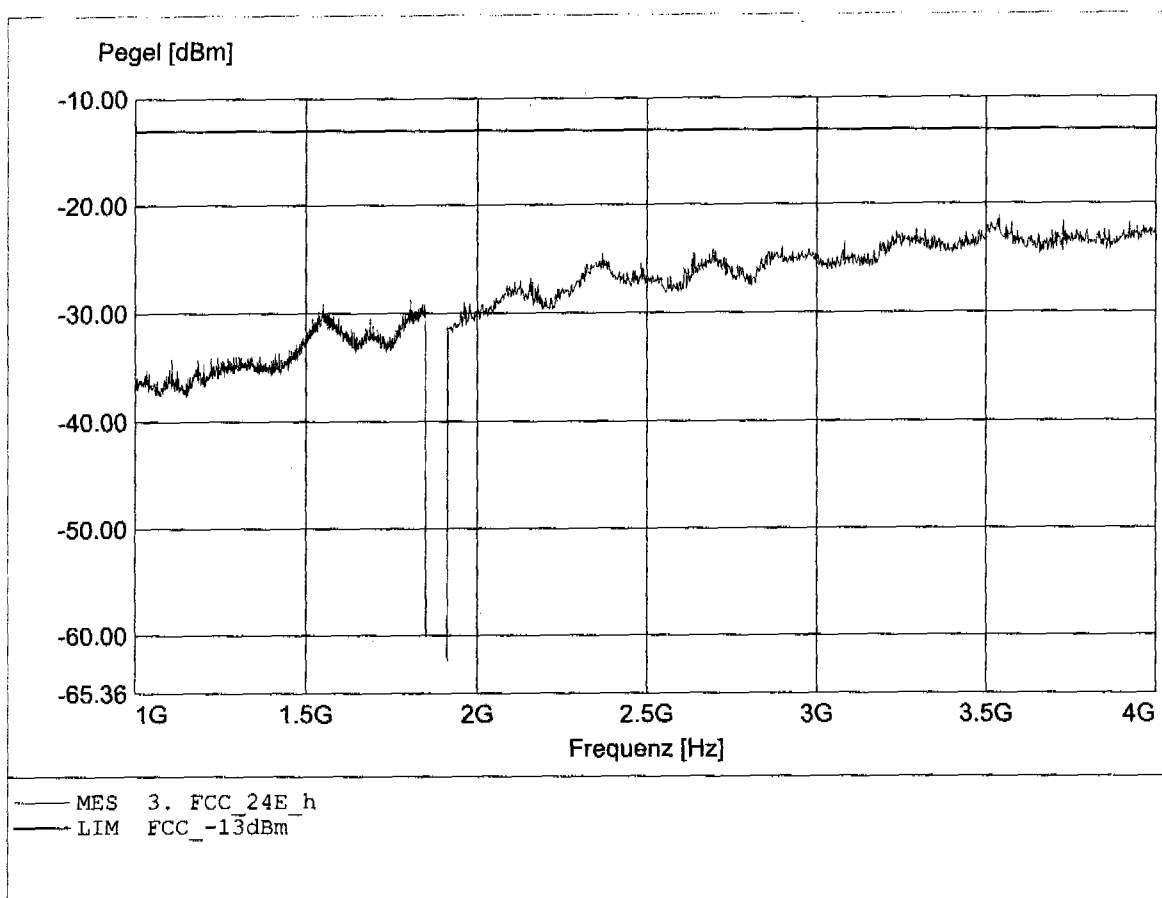


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

EUT / Model: GPRS Dual Band Handset / EB-G60U
 Channel: 661
 Approval Holder: Compal Communications Inc.
 Test Site / Operator: ETS / Mr. F.Schulz
 Temperature/ Voltage: 23°C / Unom. : 3.8 VDC
 Test Specification: according to §24.238
 Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
 Comment 2: Freq: 7.520GHz, Pmax: -35.75dBm, RBW: 1MHz

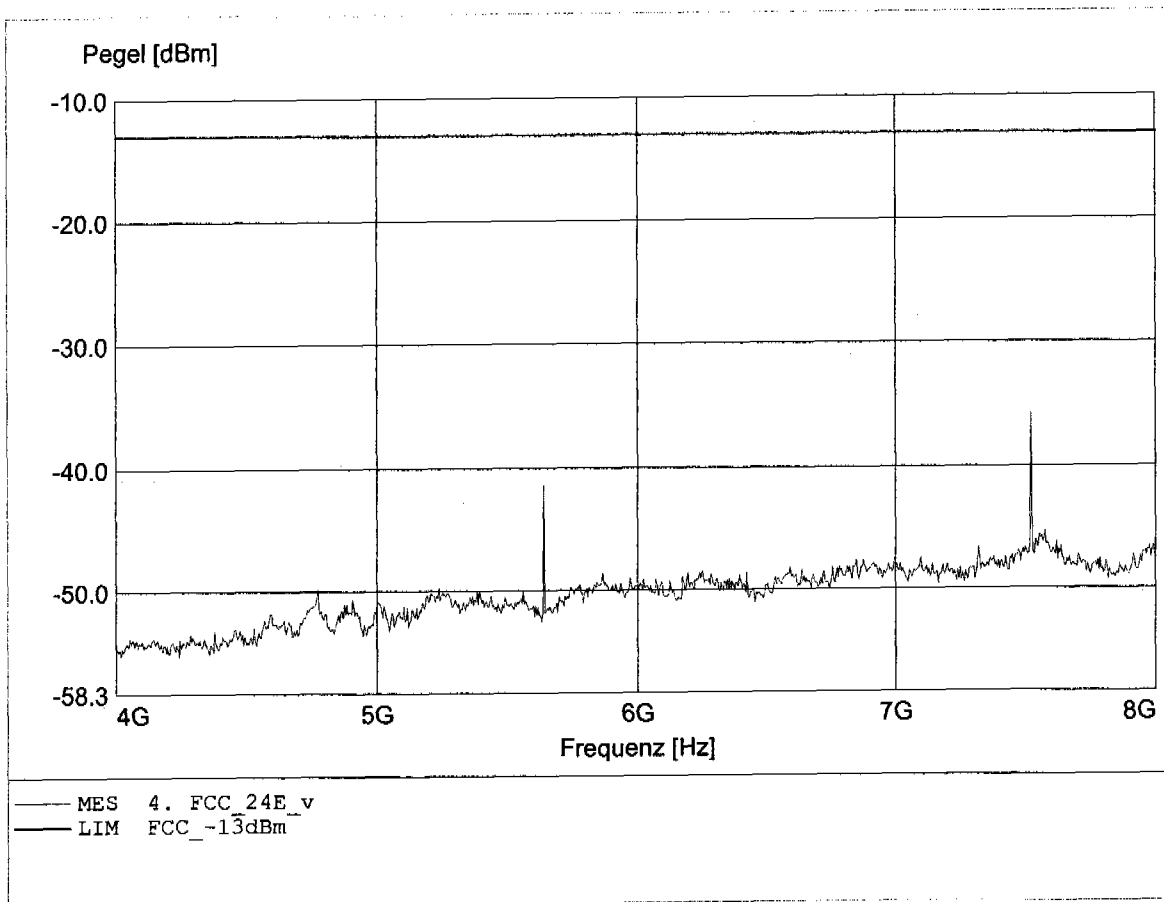


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

EUT / Model: GPRS Dual Band Handset / EB-G60U
Channel: 661
Approval Holder: Compal Communications Inc.
Test Site / Operator: ETS / Mr. F.Schulz
Temperature/ Voltage: 23°C / Unom. : 3.8 VDC
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 7.520GHz, Pmax: -33.48dBm, RBW: 1MHz

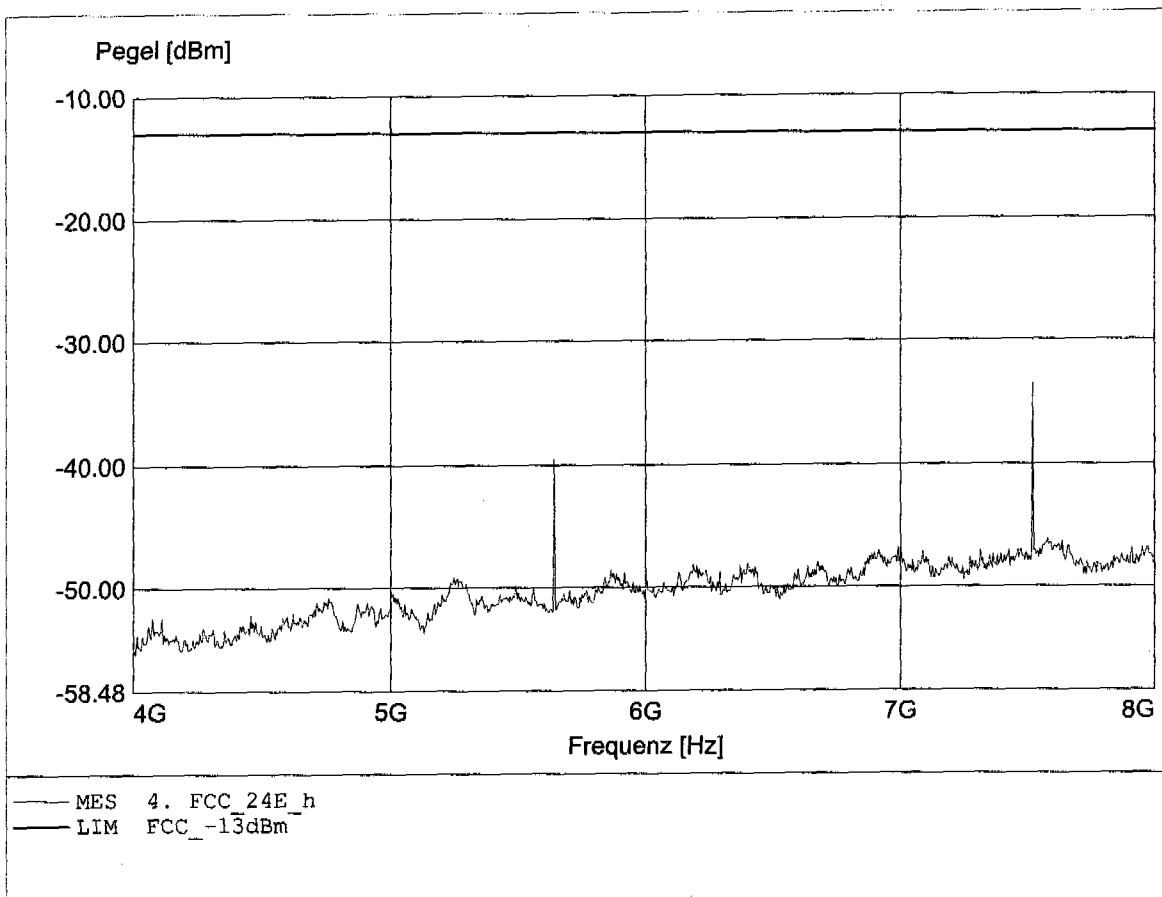


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

EUT / Model: GPRS Dual Band Handset / EB-G60U
Channel: 661
Approval Holder: Compal Communications Inc.
Test Site / Operator: ETS / Mr. F.Schulz
Temperature/ Voltage: 23°C / Unom. : 3.8 VDC
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 11.280GHz, Pmax: -27.46dBm, RBW: 1MHz

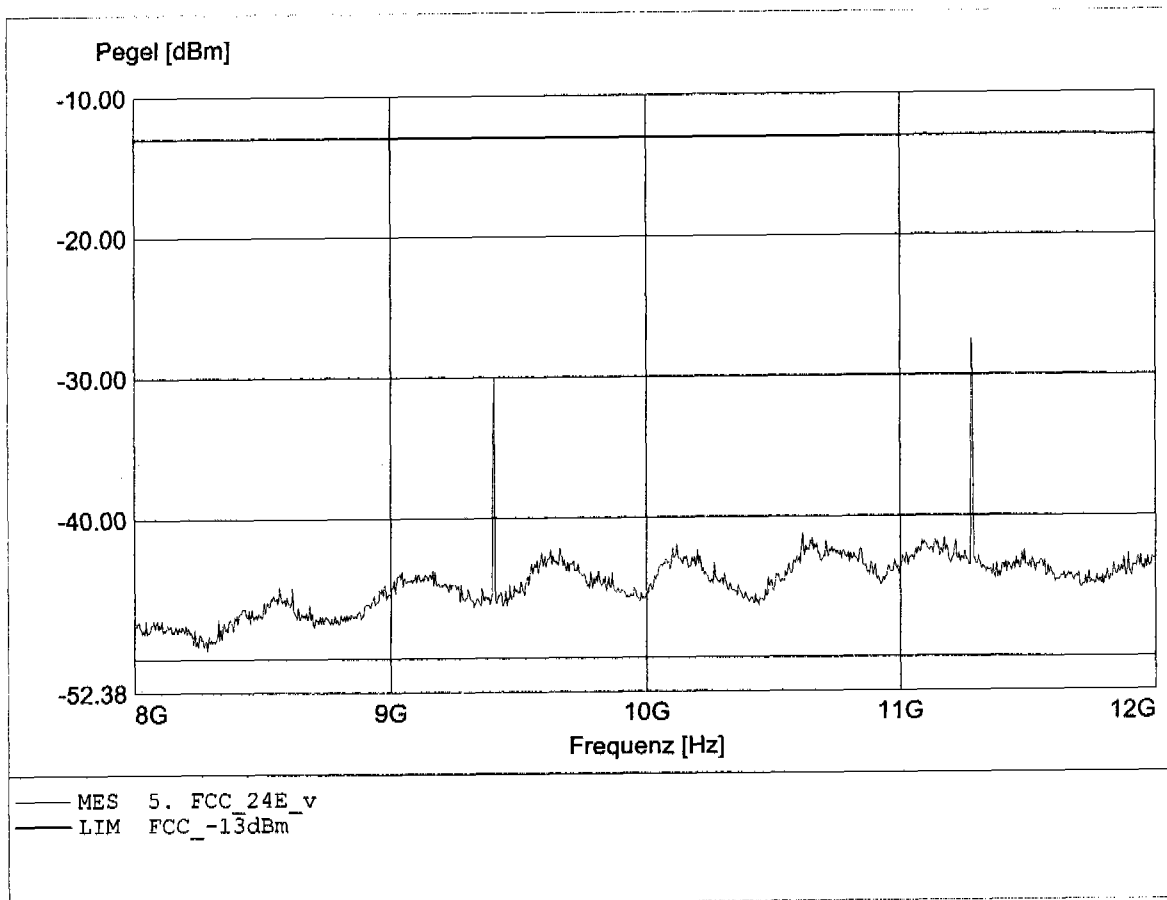


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

EUT / Model: GPRS Dual Band Handset / EB-G60U
Channel: 661
Approval Holder: Compal Communications Inc.
Test Site / Operator: ETS / Mr. F.Schulz
Temperature/ Voltage: 23°C / Unom. : 3.8 VDC
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 9.404GHz, Pmax: -28.58dBm, RBW: 1MHz

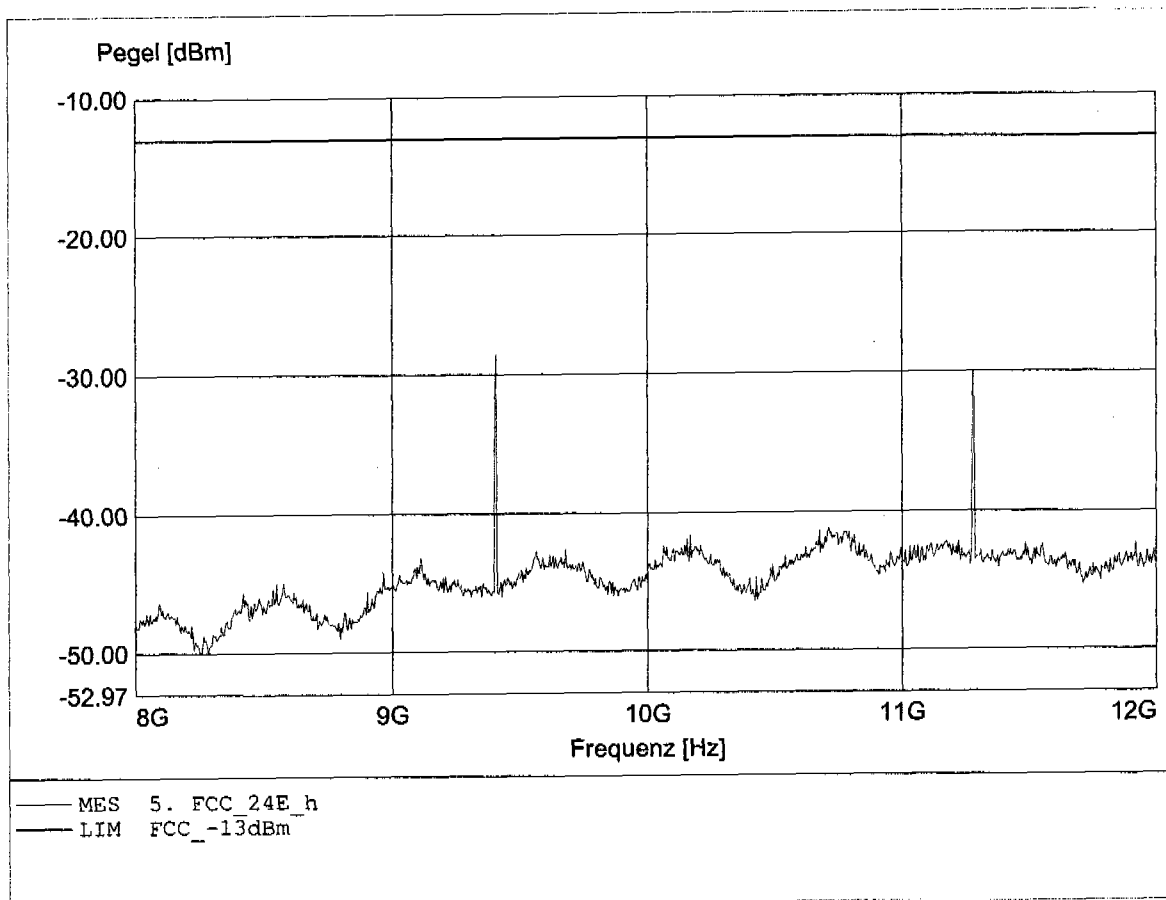


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

EUT / Model: GPRS Dual Band Handset / EB-G60U
Channel: 661
Approval Holder: Compal Communications Inc.
Test Site / Operator: ETS / Mr. F.Schulz
Temperature/ Voltage: 23°C / Unom. : 3.8 VDC
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 13.167GHz, Pmax: -23.72dBm, RBW: 1MHz

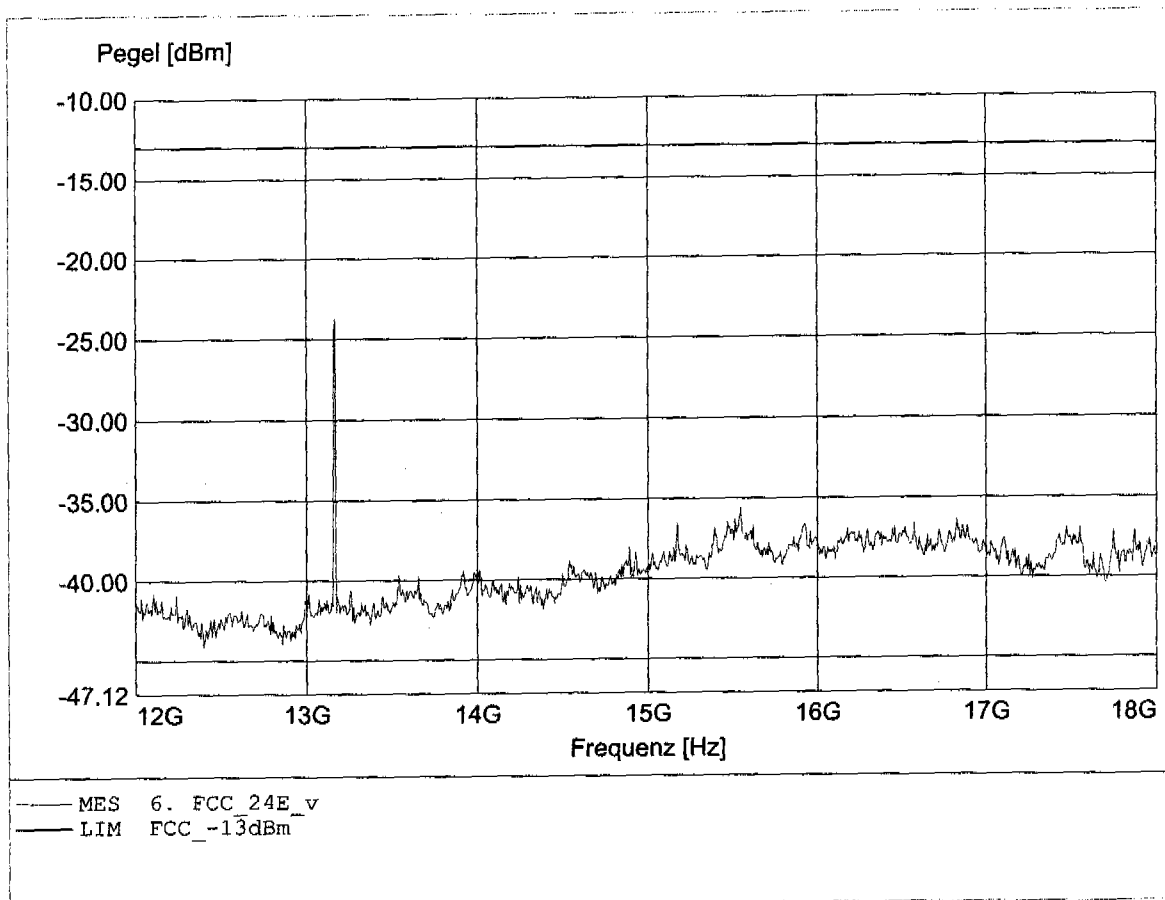


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

EUT / Model: GPRS Dual Band Handset / EB-G60U
Channel: 661
Approval Holder: Compal Communications Inc.
Test Site / Operator: ETS / Mr. F.Schulz
Temperature/ Voltage: 23°C / Unom. : 3.8 VDC
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 13.160GHz, Pmax: -29.59dBm, RBW: 1MHz

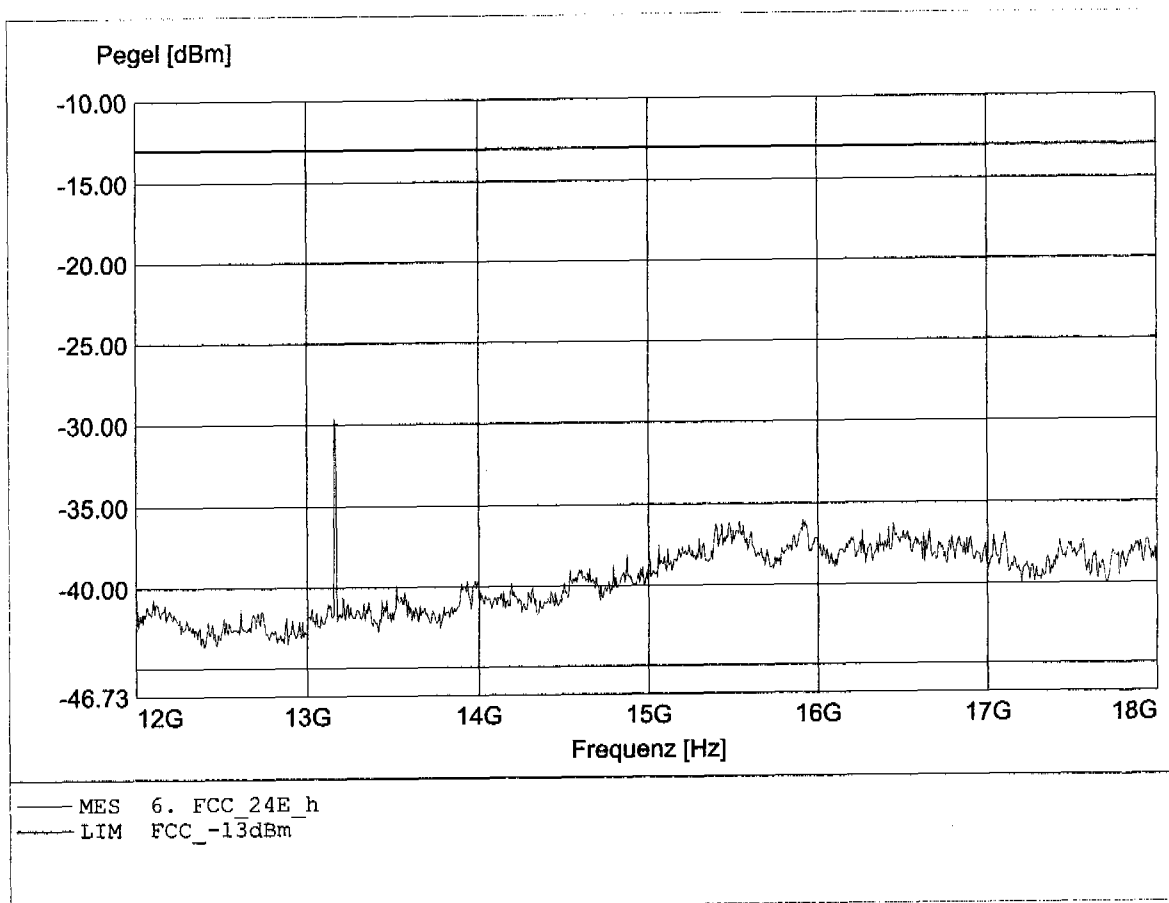


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

EUT / Model: GPRS Dual Band Handset / EB-G60U
Channel: 661
Approval Holder: Compal Communications Inc.
Test Site / Operator: ETS / Mr. F.Schulz
Temperature/ Voltage: 23°C / Unom. : 3.8 VDC
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 26.500GHz, Pmax: -27.97dBm, RBW: 1MHz

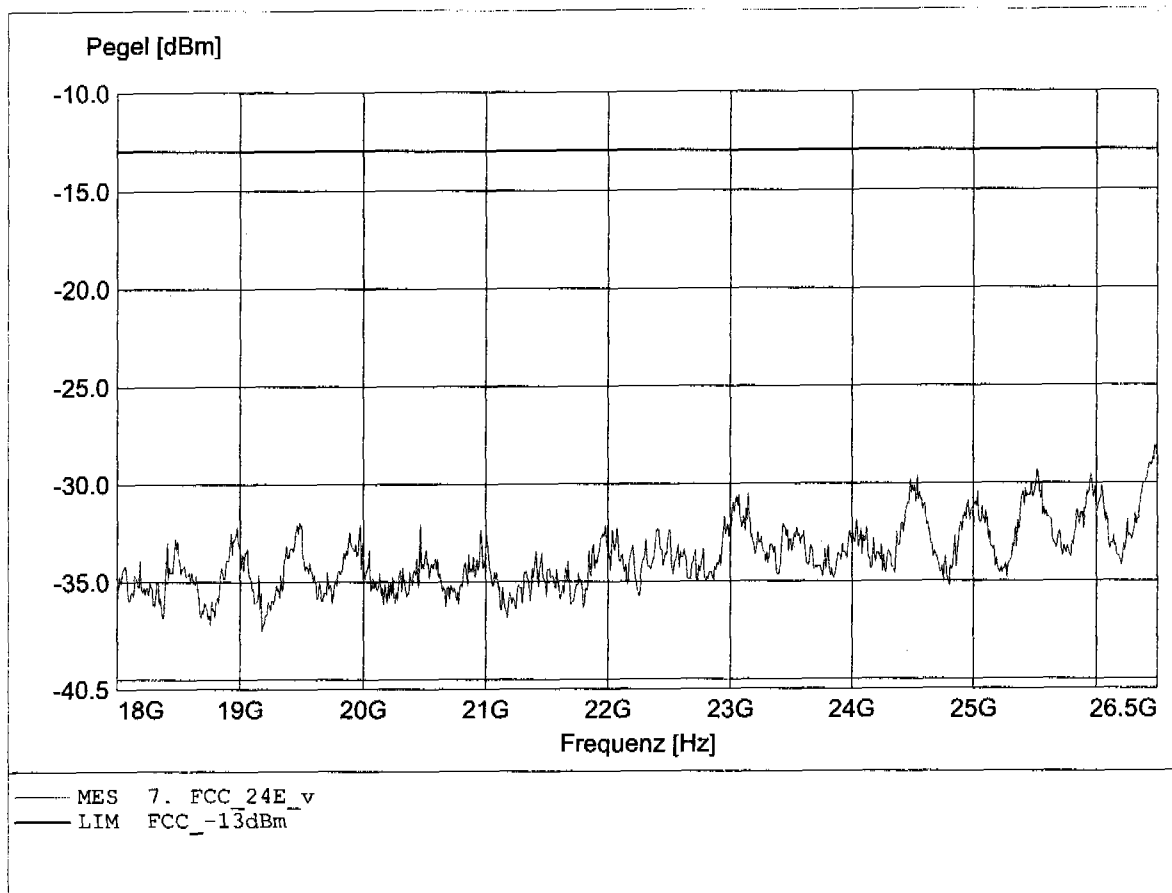


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

EUT / Model: GPRS Dual Band Handset / EB-G60U
Channel: 661
Approval Holder: Compal Communications Inc.
Test Site / Operator: ETS / Mr. F.Schulz
Temperature/ Voltage: 23°C / Unom. : 3.8 VDC
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 26.472GHz, Pmax: -29.29dBm, RBW: 1MHz

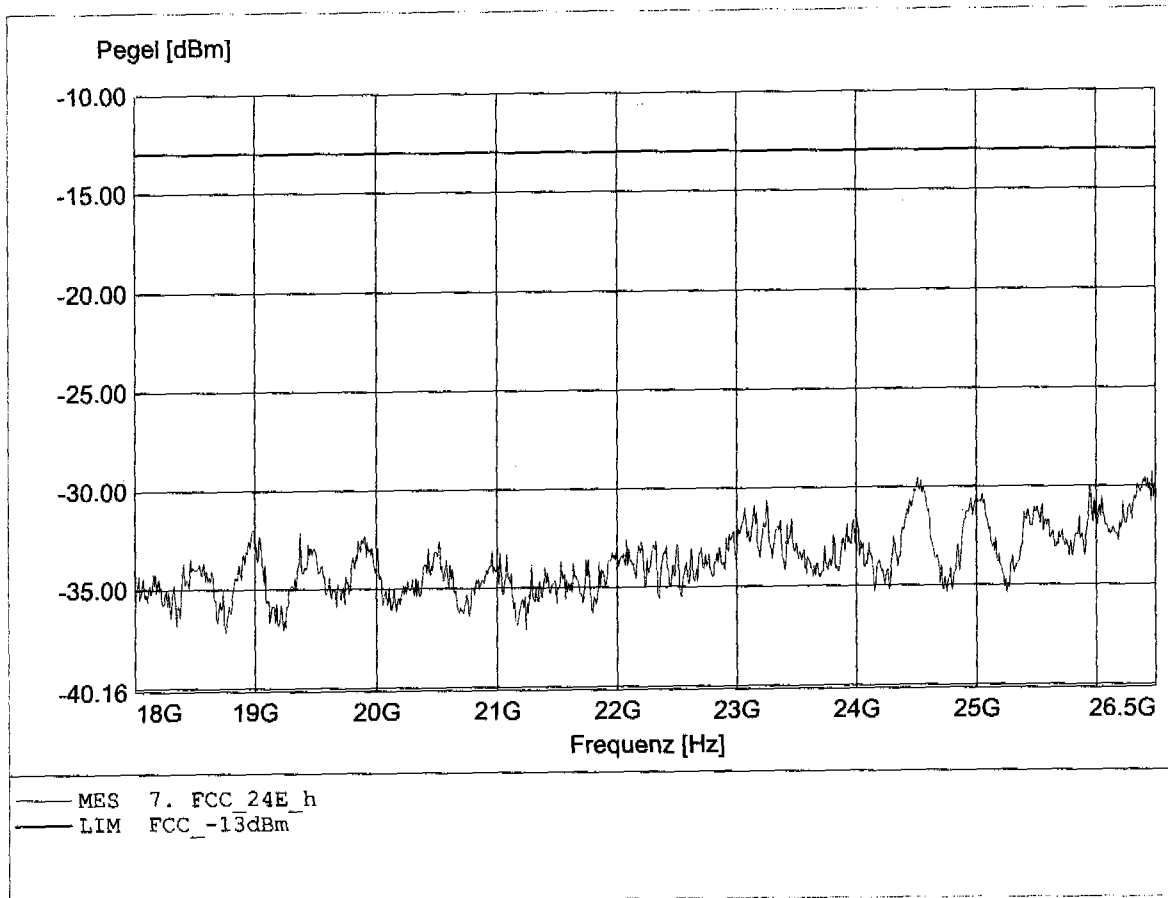


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

EUT / Model: GPRS Dual Band Handset / EB-G60U
Channel: 810
Approval Holder: Compal Communications Inc.
Test Site / Operator: ETS / Mr. F.Schulz
Temperature/ Voltage: 23°C / Unom. : 3.8 VDC
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 195.278MHz, Pmax: -50.07dBm, RBW: 1MHz

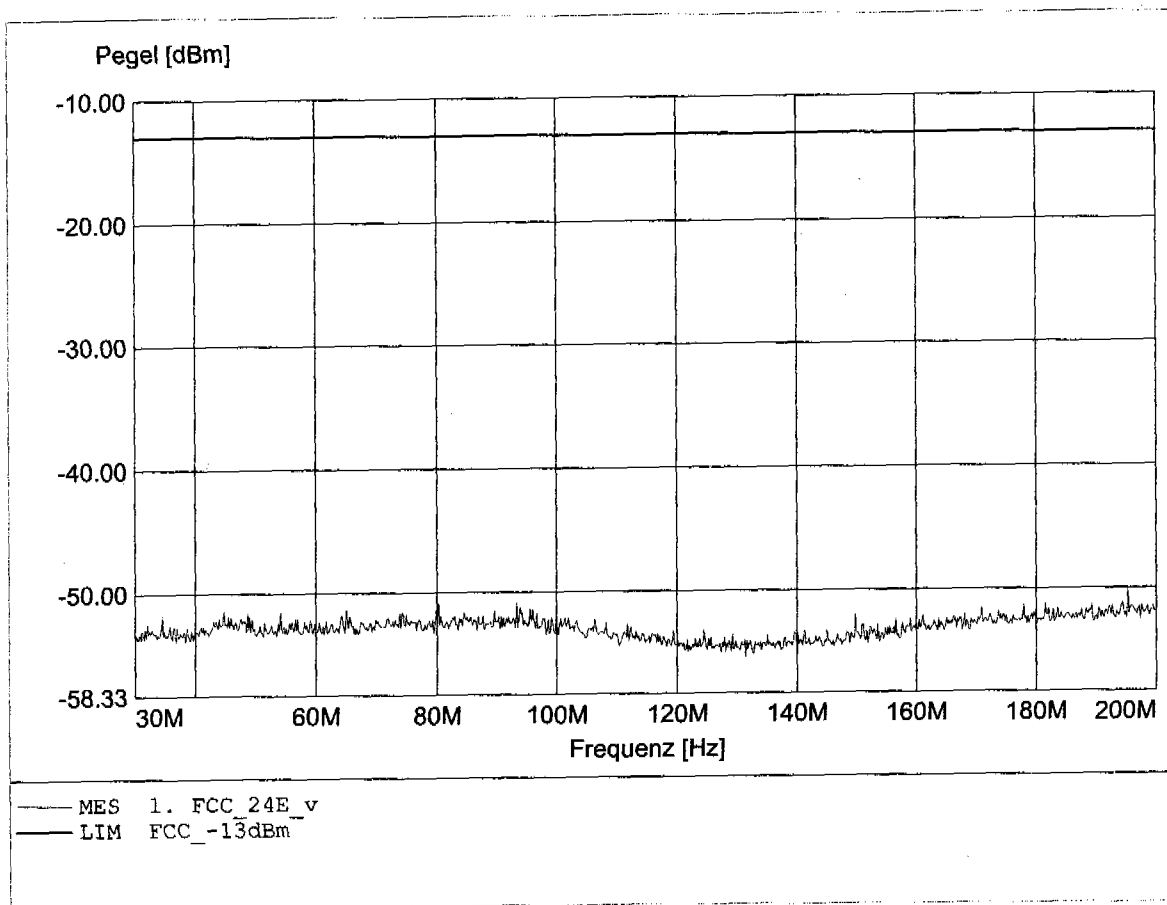


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

EUT / Model: GPRS Dual Band Handset / EB-G60U
Channel: 810
Approval Holder: Compal Communications Inc.
Test Site / Operator: ETS / Mr. F.Schulz
Temperature/ Voltage: 23°C / Unom. : 3.8 VDC
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 51.533MHz, Pmax: -44.00dBm, RBW: 1MHz

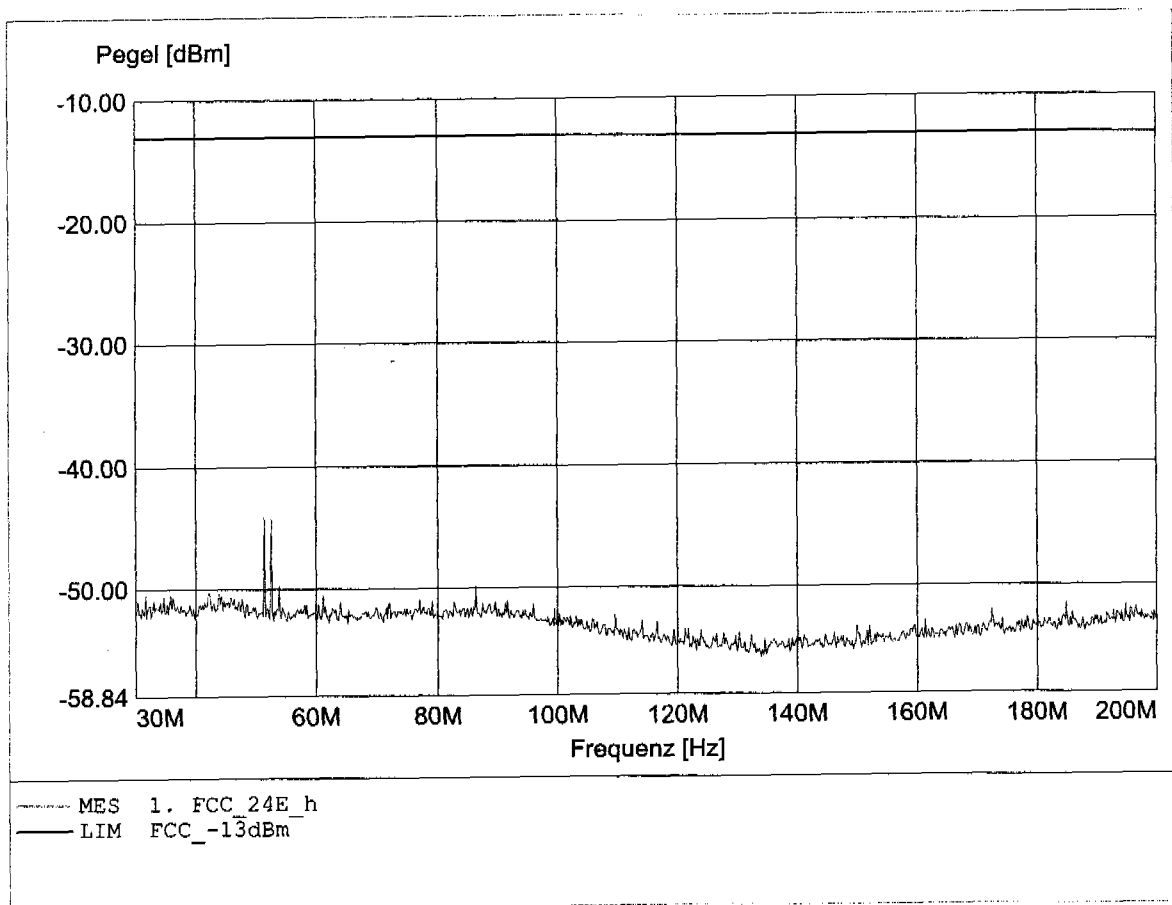


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

EUT / Model: GPRS Dual Band Handset / EB-G60U
Channel: 810
Approval Holder: Compal Communications Inc.
Test Site / Operator: ETS / Mr. F.Schulz
Temperature/ Voltage: 23°C / Unom. : 3.8 VDC
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL 223
Comment 2: Freq: 986.667MHz, Pmax: -37.58dBm, RBW: 1MHz

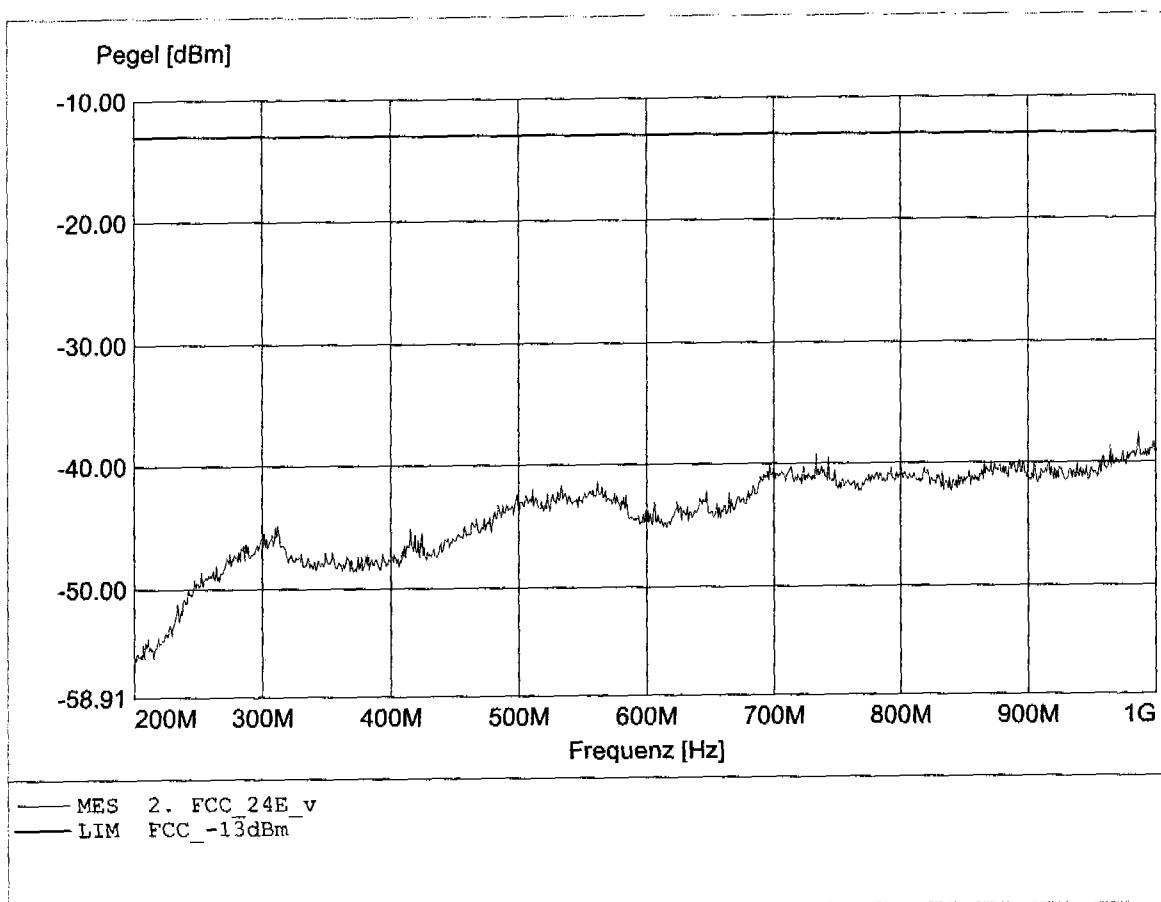


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

EUT / Model: GPRS Dual Band Handset / EB-G60U
Channel: 810
Approval Holder: Compal Communications Inc.
Test Site / Operator: ETS / Mr. F.Schulz
Temperature/ Voltage: 23°C / Unom. : 3.8 VDC
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL 223
Comment 2: Freq: 864.889MHz, Pmax: -36.59dBm, RBW: 1MHz

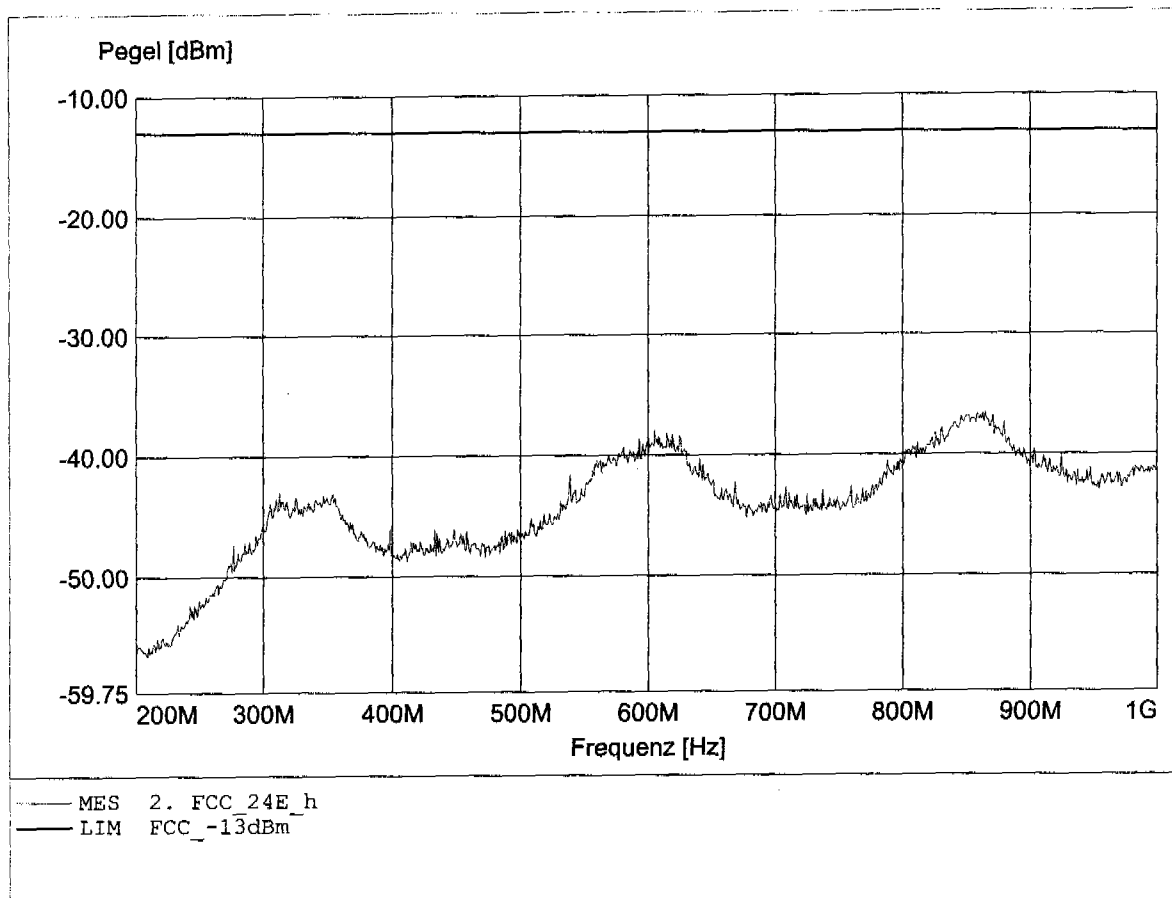


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

EUT / Model: GPRS Dual Band Handset / EB-G60U
Channel: 810
Approval Holder: Compal Communications Inc.
Test Site / Operator: ETS / Mr. F.Schulz
Temperature/ Voltage: 23°C / Unom. : 3.8 VDC
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq: 3.963GHz, Pmax: -21.03dBm, RBW: 1MHz/3kHz

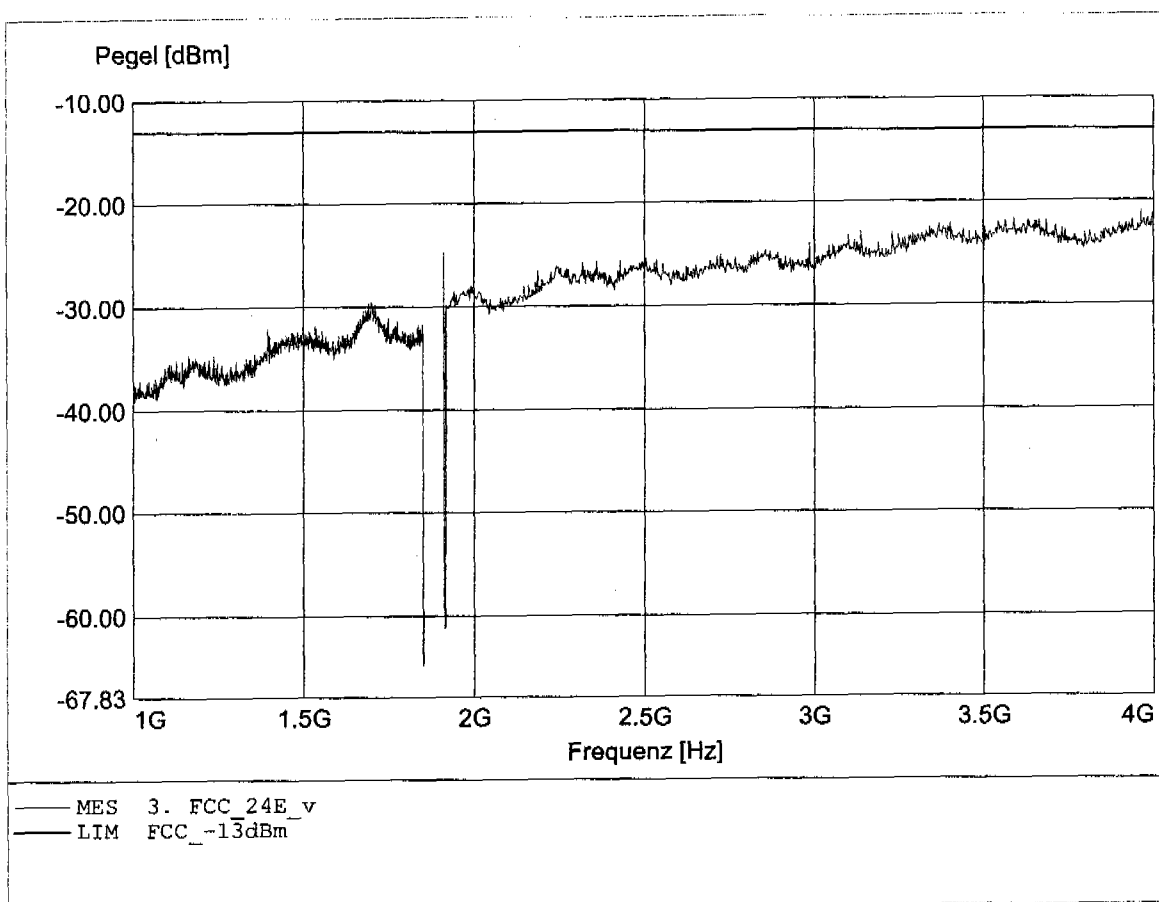


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

EUT / Model: GPRS Dual Band Handset / EB-G60U
Channel: 810
Approval Holder: Compal Communications Inc.
Test Site / Operator: ETS / Mr. F.Schulz
Temperature/ Voltage: 23°C / Unom. : 3.8 VDC
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq: 3.527GHz, Pmax: -21.36dBm, RBW: 1MHz/3kHz

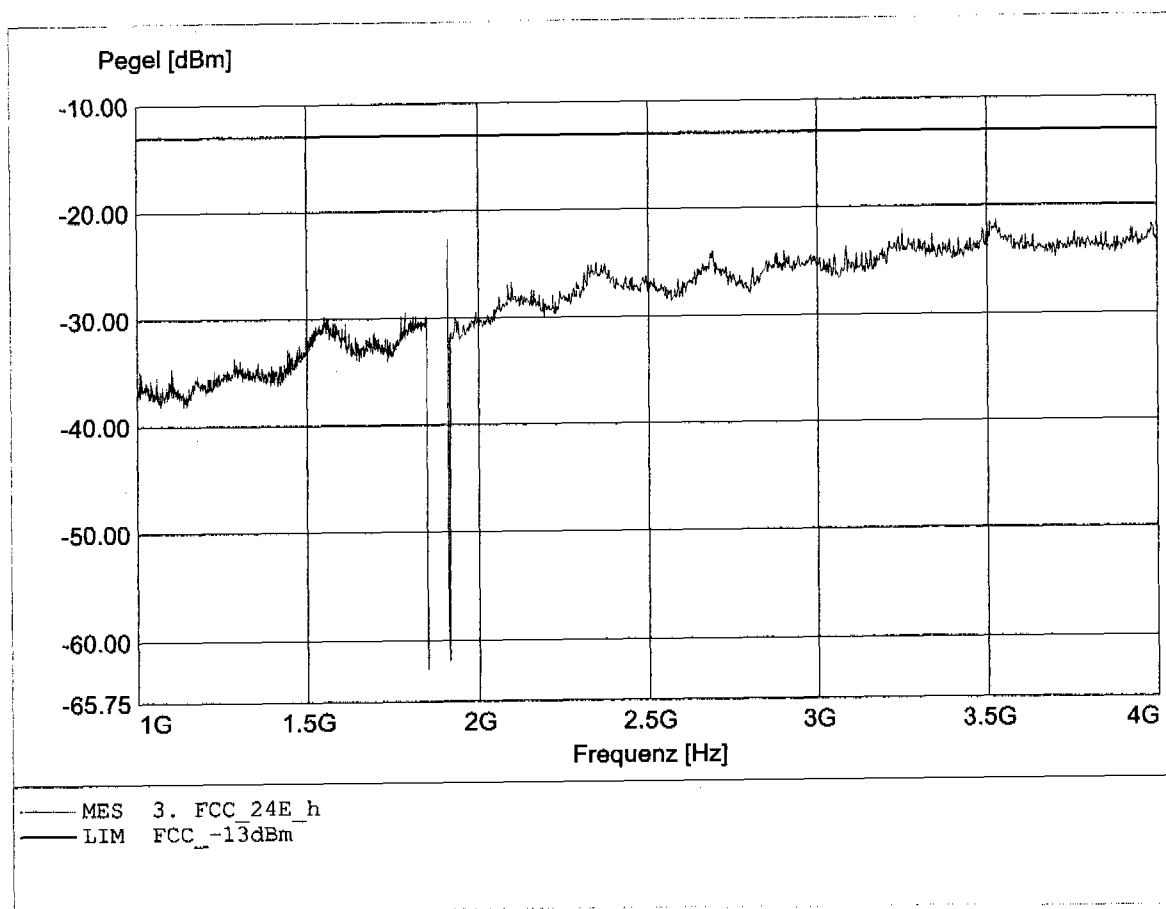


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

EUT / Model: GPRS Dual Band Handset / EB-G60U
Channel: 810
Approval Holder: Compal Communications Inc.
Test Site / Operator: ETS / Mr. F.Schulz
Temperature/ Voltage: 23°C / Unom. : 3.8 VDC
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 5.729GHz, Pmax: -35.59dBm, RBW: 1MHz

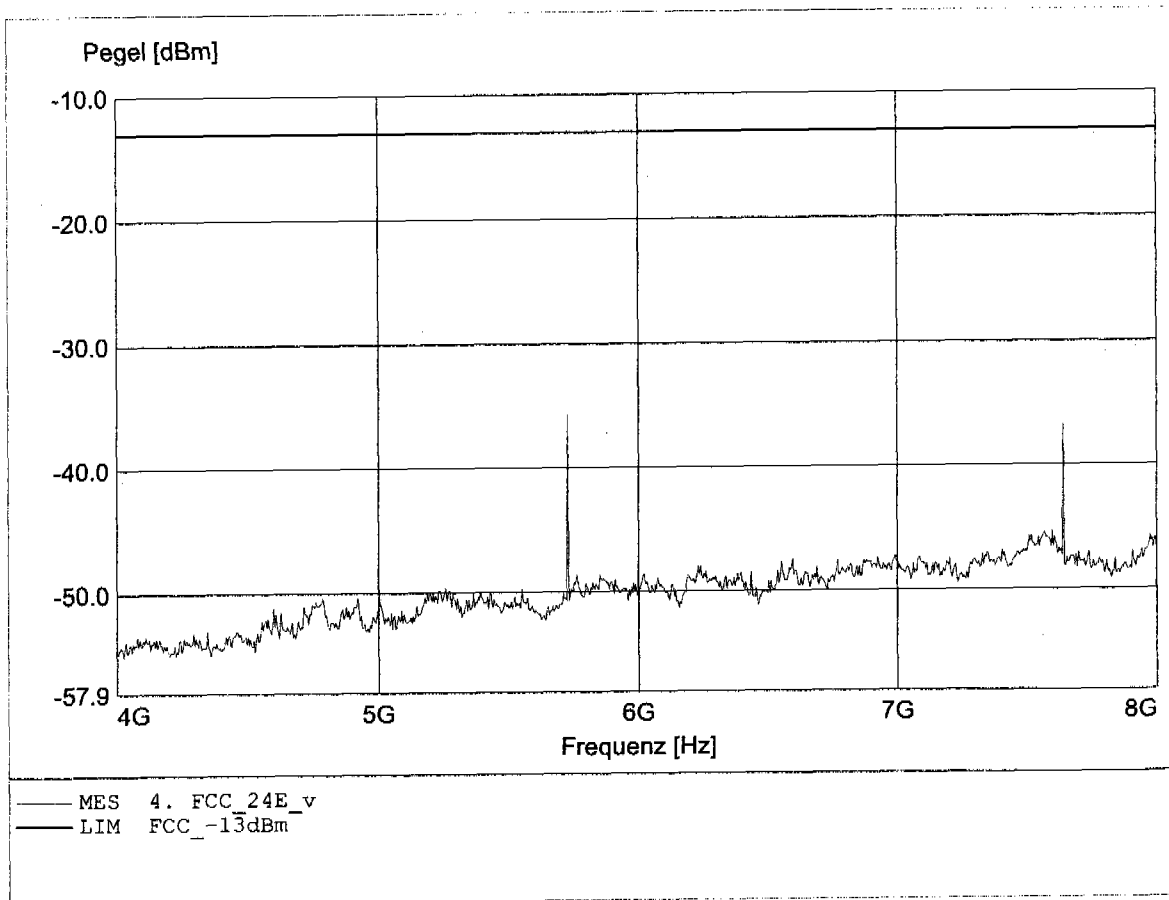


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

EUT / Model: GPRS Dual Band Handset / EB-G60U
Channel: 810
Approval Holder: Compal Communications Inc.
Test Site / Operator: ETS / Mr. F.Schulz
Temperature/ Voltage: 23°C / Unom. : 3.8 VDC
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 7.640GHz, Pmax: -34.94dBm, RBW: 1MHz

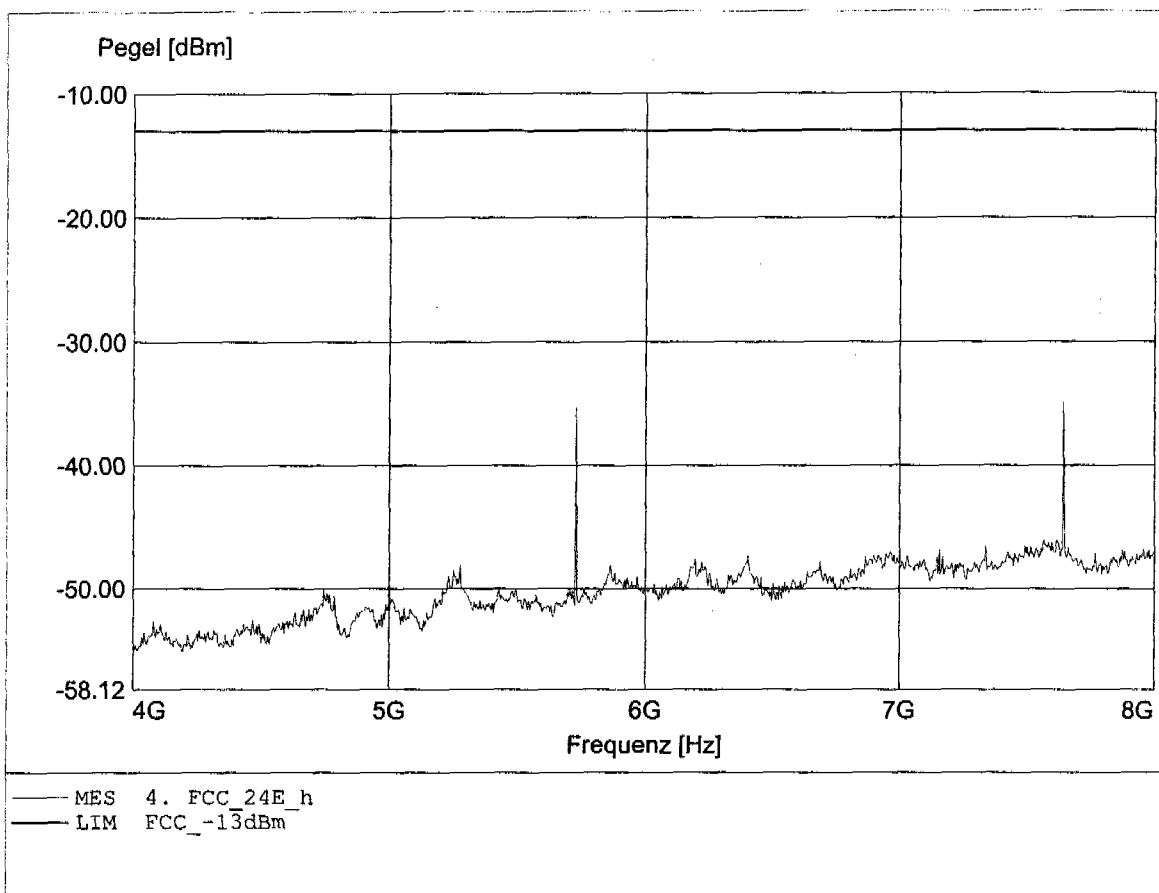


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

EUT / Model: GPRS Dual Band Handset / EB-G60U
Channel: 810
Approval Holder: Compal Communications Inc.
Test Site / Operator: ETS / Mr. F.Schulz
Temperature/ Voltage: 23°C / Unom. : 3.8 VDC
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 9.551GHz, Pmax: -31.93dBm, RBW: 1MHz

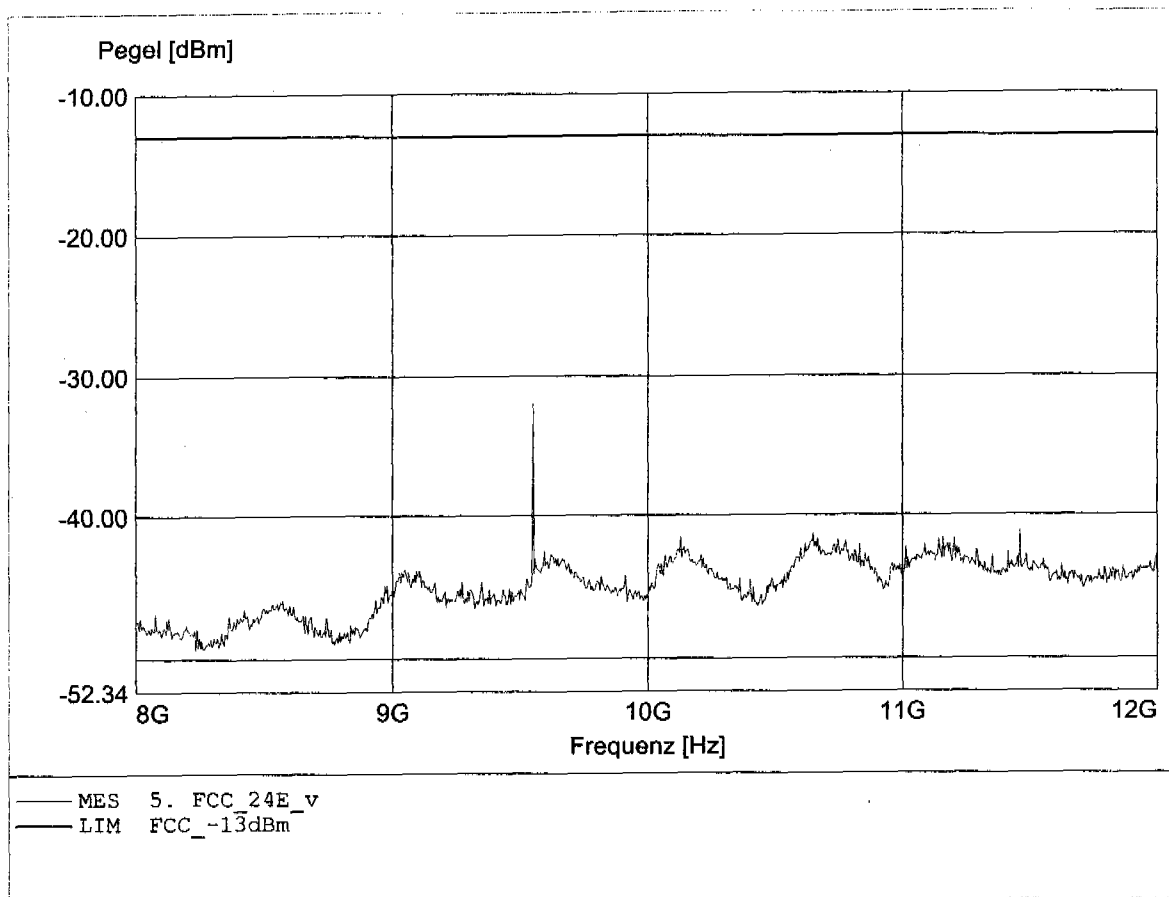


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

EUT / Model: GPRS Dual Band Handset / EB-G60U
Channel: 810
Approval Holder: Compal Communications Inc.
Test Site / Operator: ETS / Mr. F.Schulz
Temperature/ Voltage: 23°C / Unom. : 3.8 VDC
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 9.551GHz, Pmax: -30.93dBm, RBW: 1MHz

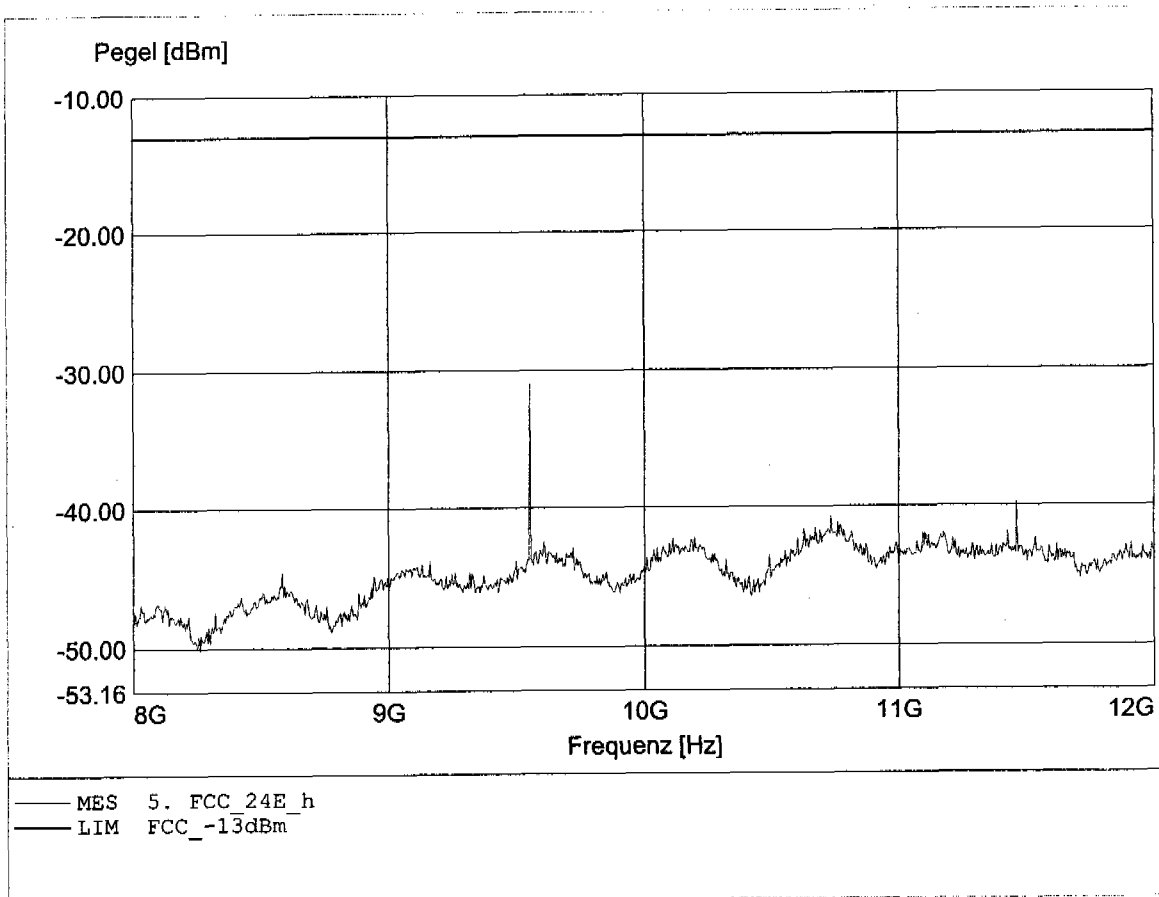


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

EUT / Model: GPRS Dual Band Handset / EB-G60U
Channel: 810
Approval Holder: Compal Communications Inc.
Test Site / Operator: ETS / Mr. F.Schulz
Temperature/ Voltage: 23°C / Unom. : 3.8 VDC
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 13.373GHz, Pmax: -24.44dBm, RBW: 1MHz

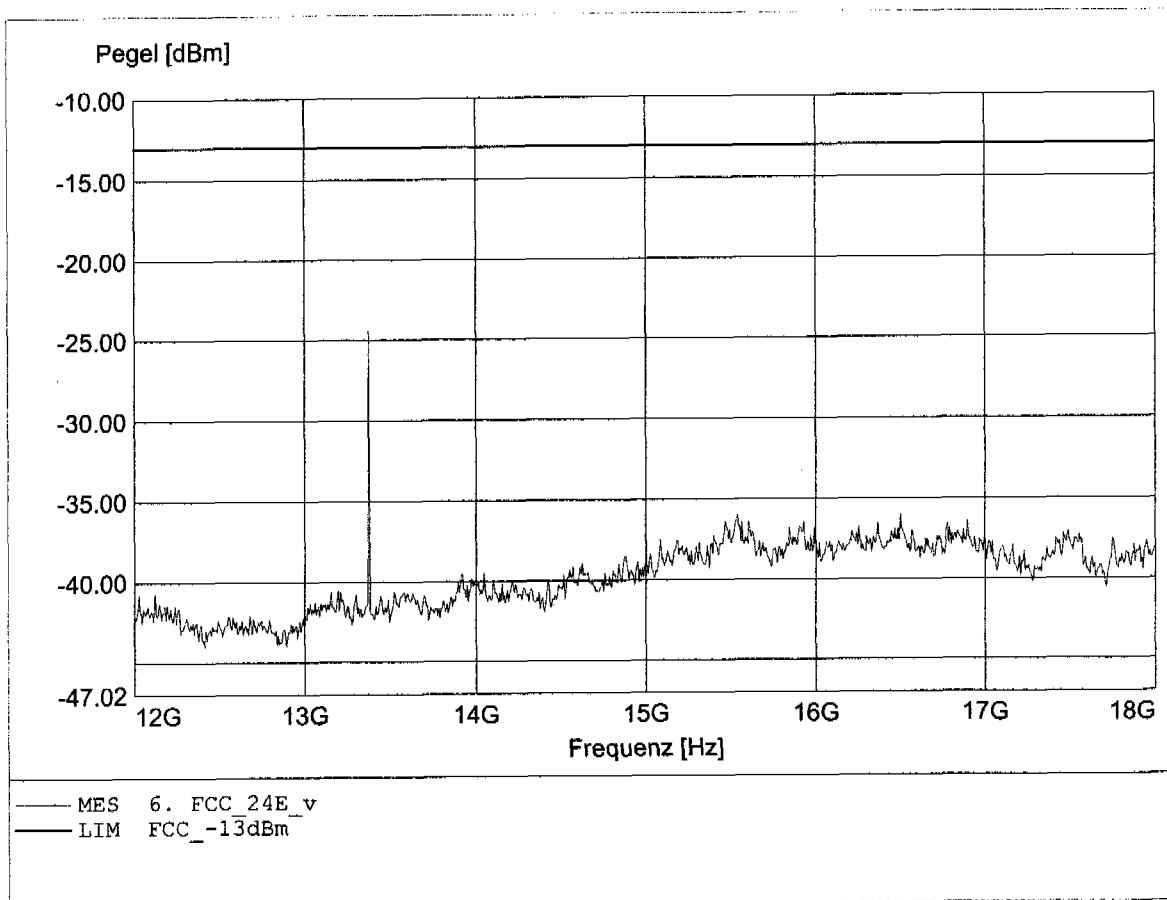


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

EUT / Model: GPRS Dual Band Handset / EB-G60U
Channel: 810
Approval Holder: Compal Communications Inc.
Test Site / Operator: ETS / Mr. F.Schulz
Temperature/ Voltage: 23°C / Unom. : 3.8 VDC
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 13.373GHz, Pmax: -30.45dBm, RBW: 1MHz

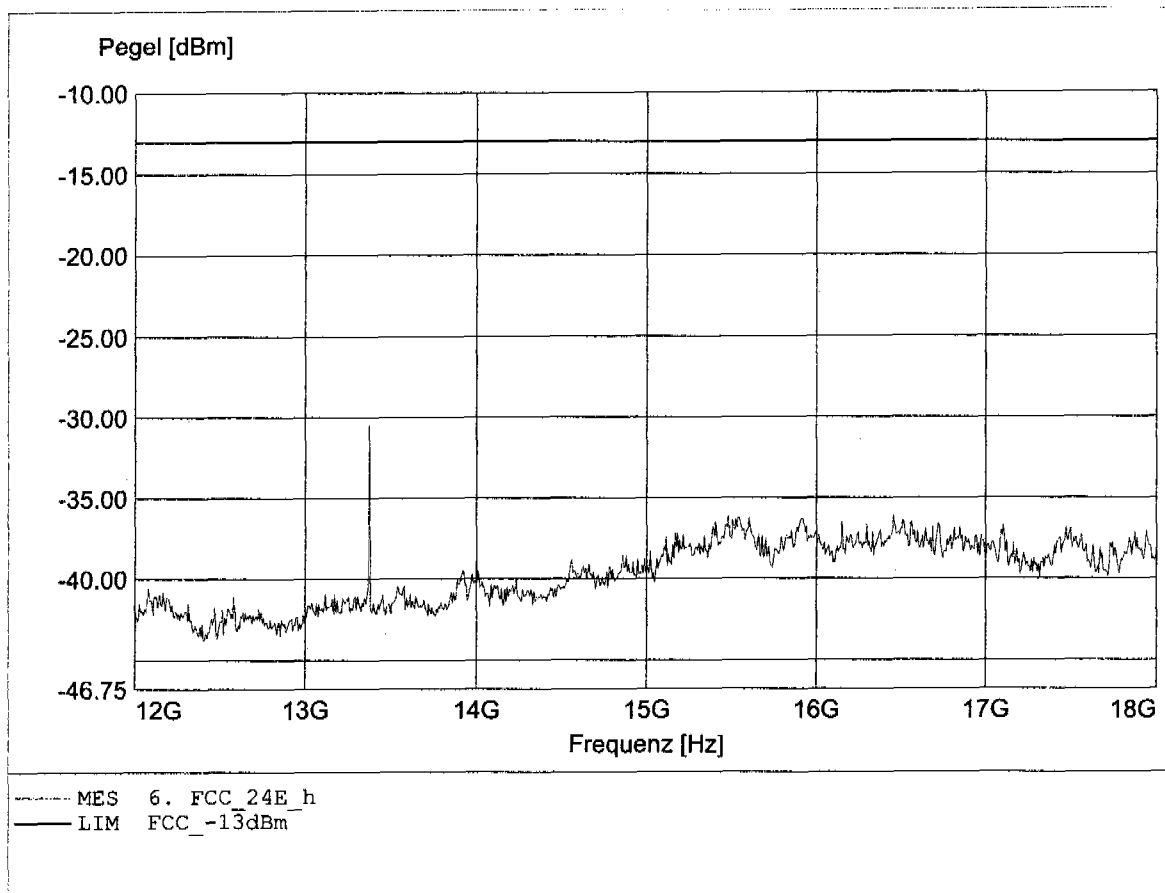


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

EUT / Model: GPRS Dual Band Handset / EB-G60U
Channel: 810
Approval Holder: Compal Communications Inc.
Test Site / Operator: ETS / Mr. F.Schulz
Temperature/ Voltage: 23°C / Unom. : 3.8 VDC
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 26.500GHz, Pmax: -27.47dBm, RBW: 1MHz

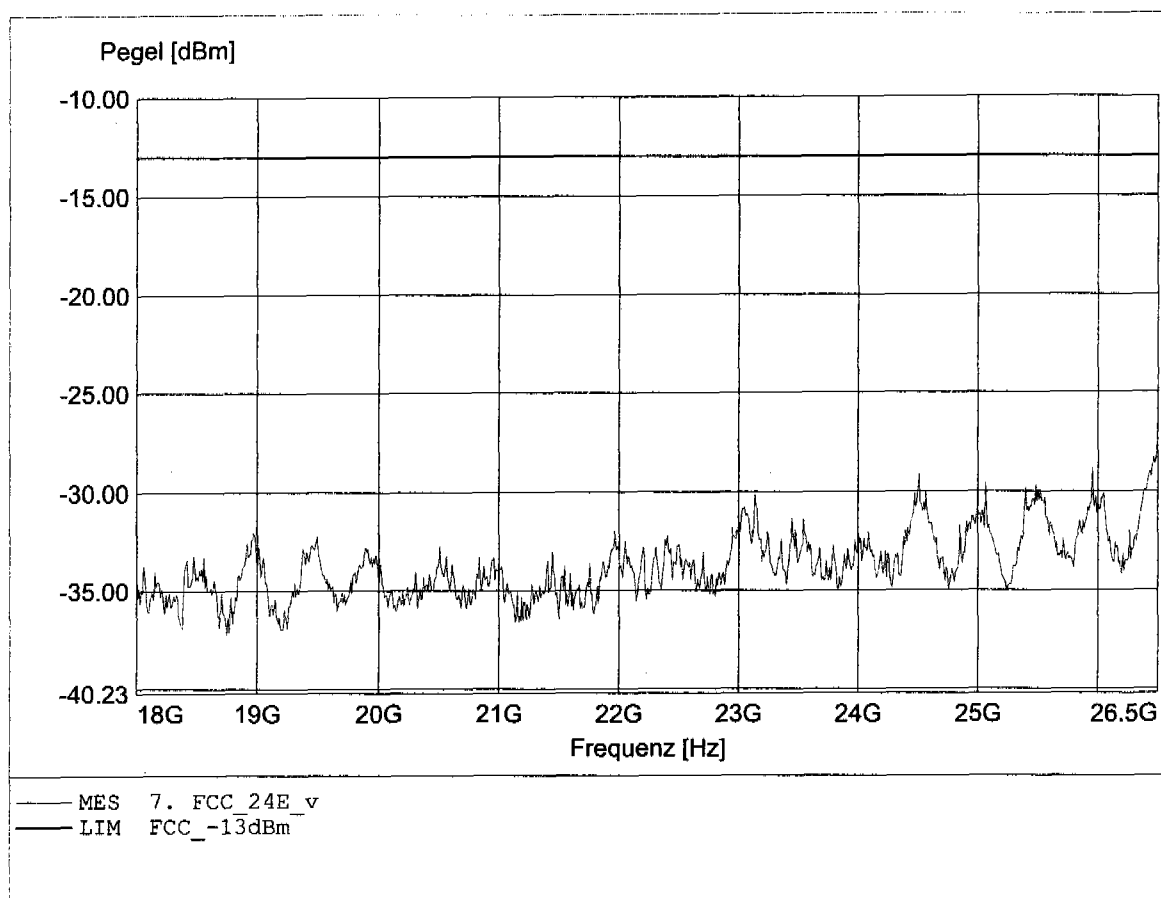


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

EUT / Model: GPRS Dual Band Handset / EB-G60U
Channel: 810
Approval Holder: Compal Communications Inc.
Test Site / Operator: ETS / Mr. F.Schulz
Temperature/ Voltage: 23°C / Unom. : 3.8 VDC
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 26.500GHz, Pmax: -28.99dBm, RBW: 1MHz

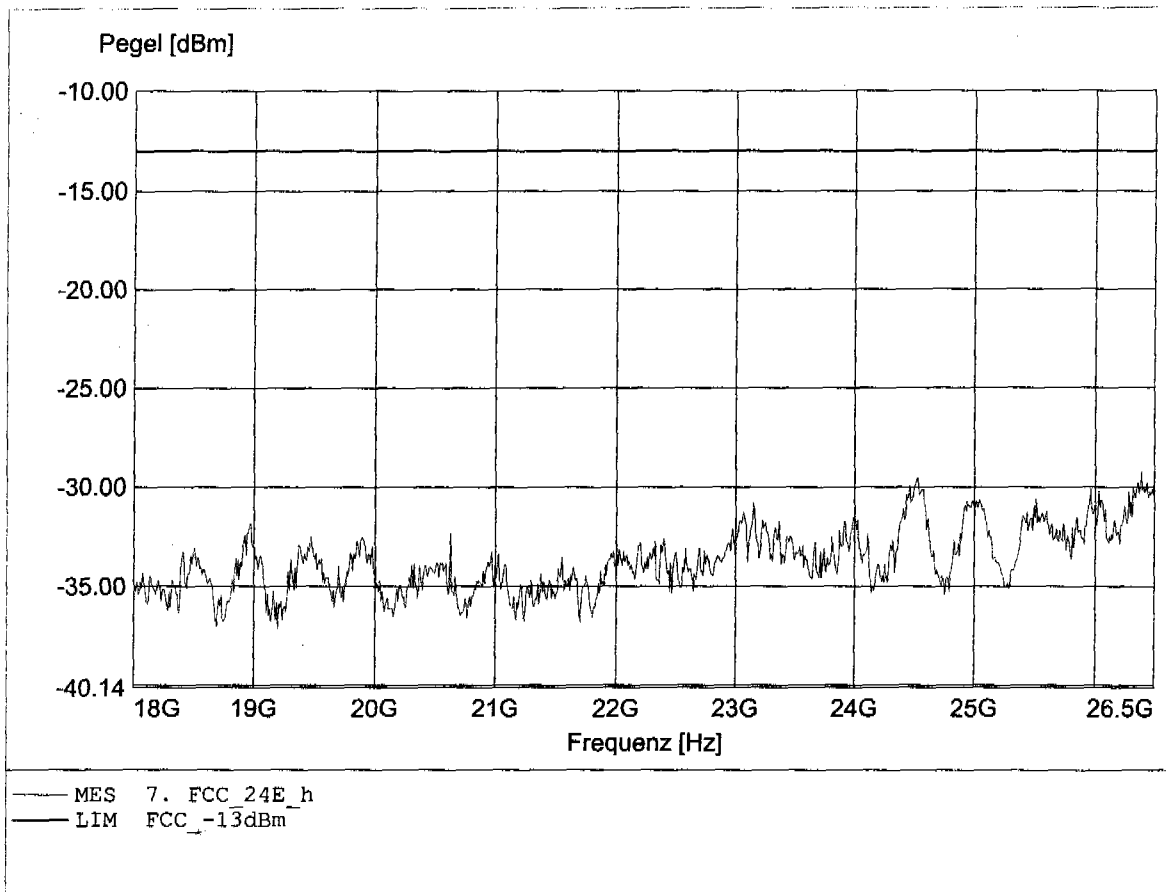




Marker 1 [T1] RBW 3 kHz RF Att 60 dB
Ref Lvl 30.80 dBm VBW 3 kHz
39.7 dBm 848.83366733 MHz SWT 560 ms Unit dBm

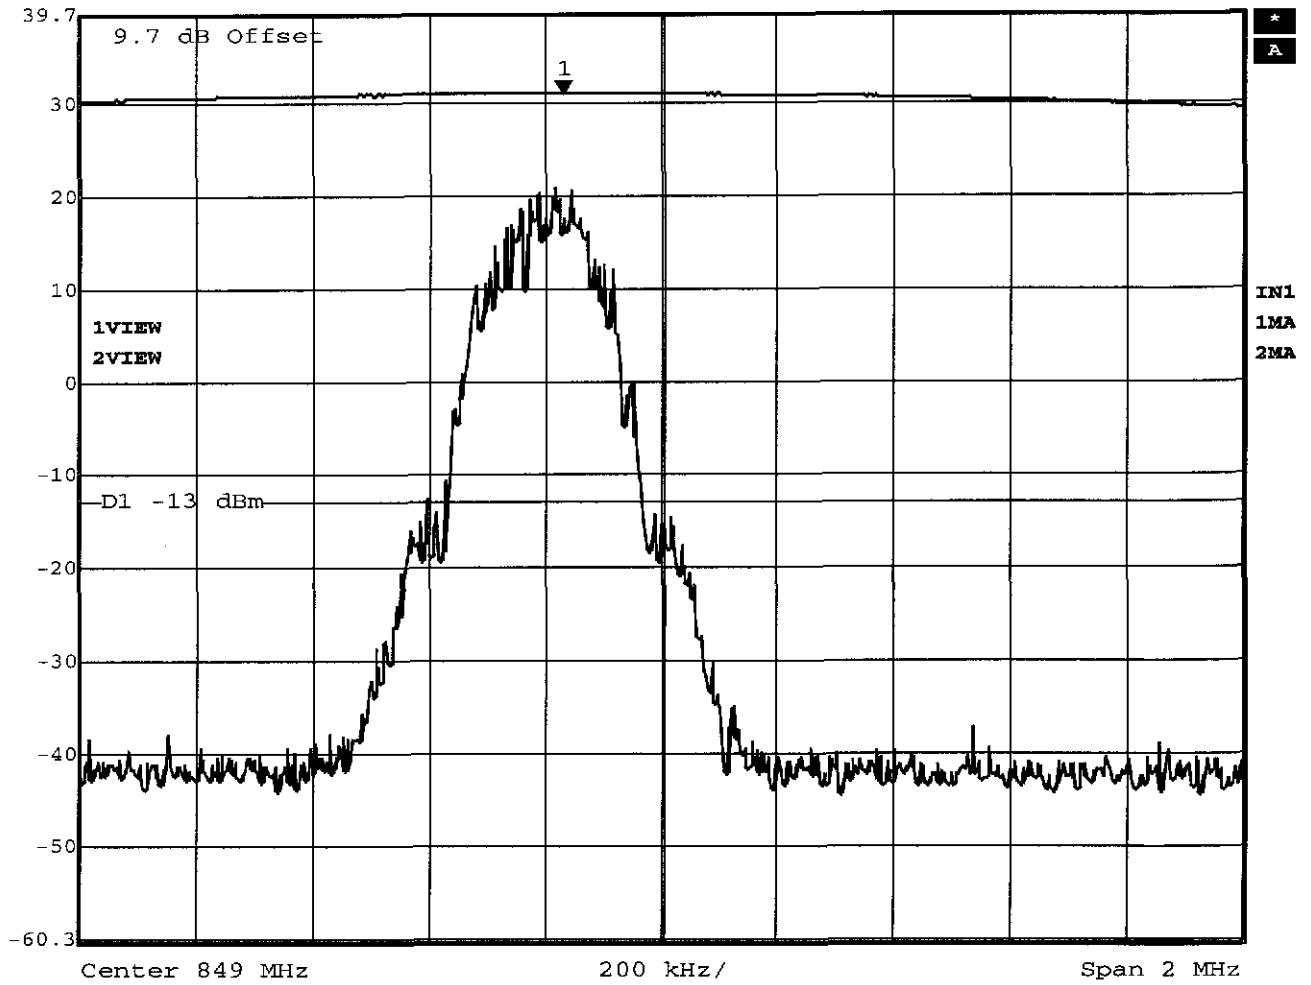

Title: Model: EB-G60U
Comment A: Higher Band Edge
Date: 25.APR.2003 09:35:02




Marker 1 [T1] RBW 3 kHz RF Att 60 dB
Ref Lvl 31.63 dBm VBW 3 kHz
39.7 dBm 824.22645291 MHz SWT 560 ms Unit dBm

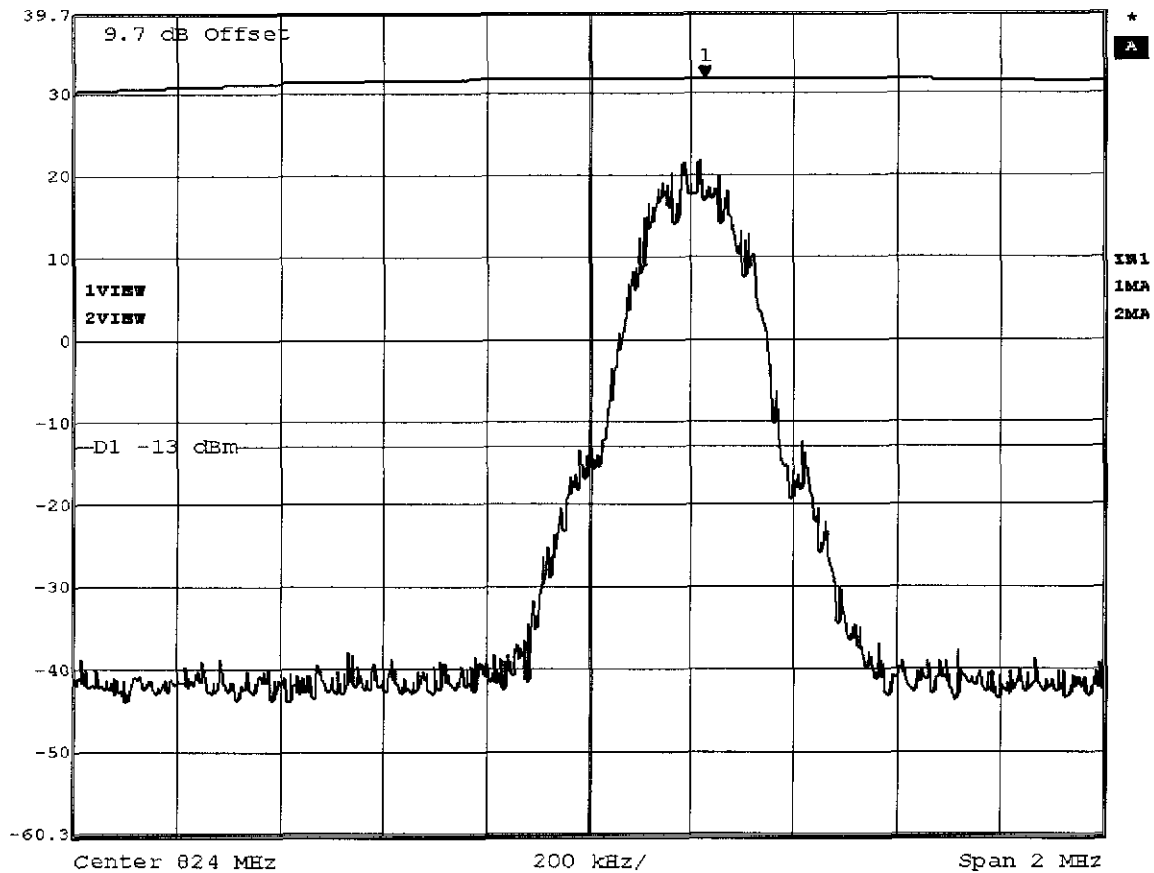

Title: Model: EB-G60U
Comment A: Lower Band Edge
Date: 25.APR.2003 08:31:14


Radiated Emissions Tx
FCC RULES PART 22 SUBPART H

EUT/Model : Dual Band Mobile Handset / EB-G60U
Channel: 128
Approval Holder: Compal Communications Inc.
Test Site / Operator: ETS / Mr. F.Schulz
Temperature/ Voltage: 23°C / Unom. : 3.8 VDC
Test Specification: according to S22.917
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 198.489MHz, Pmax: -51.59dBm, RBW: 1MHz

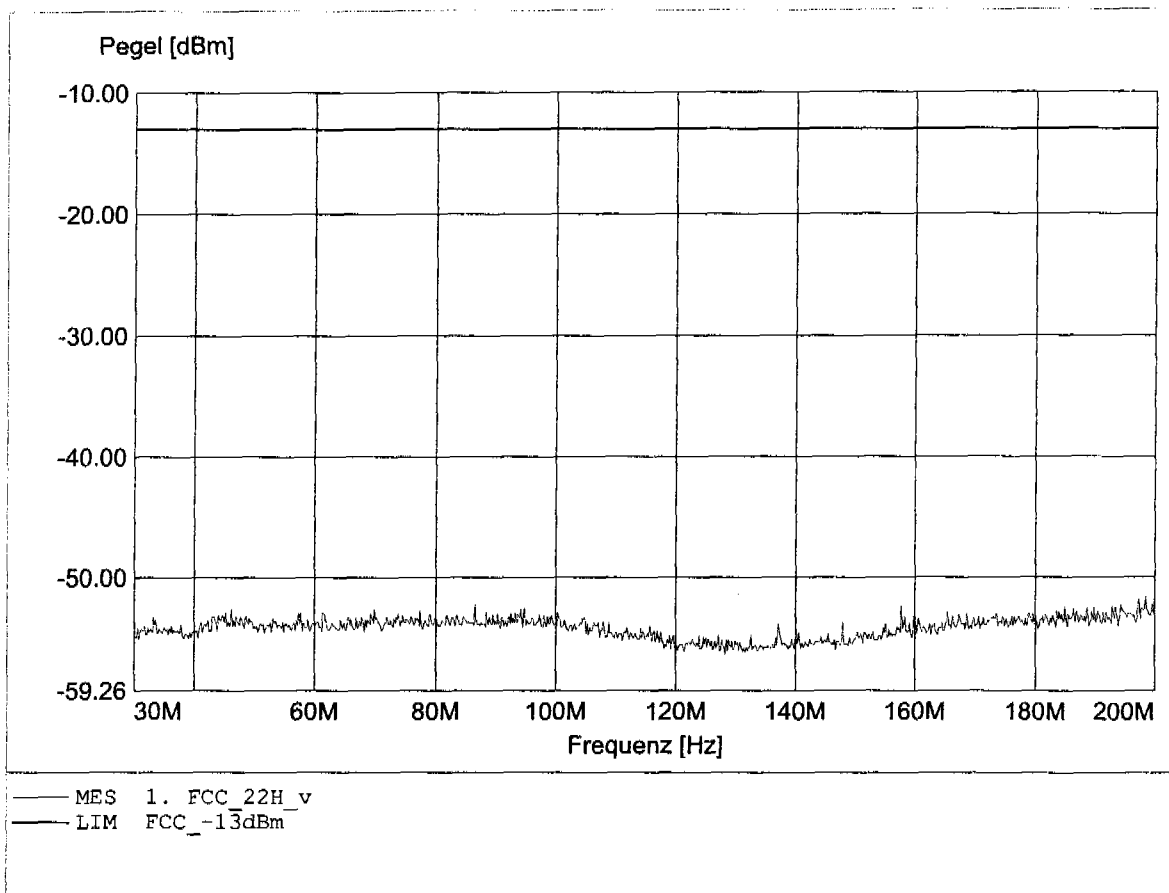


Radiated Emissions Tx
FCC RULES PART 22 SUBPART H

EUT/Model : Dual Band Mobile Handset / EB-G60U
Channel: 128
Approval Holder: Compal Communications Inc.
Test Site / Operator: ETS / Mr. F.Schulz
Temperature/ Voltage: 23°C / Unom. : 3.8 VDC
Test Specification: according to §22.917
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 43.222MHz, Pmax: -51.06dBm, RBW: 1MHz

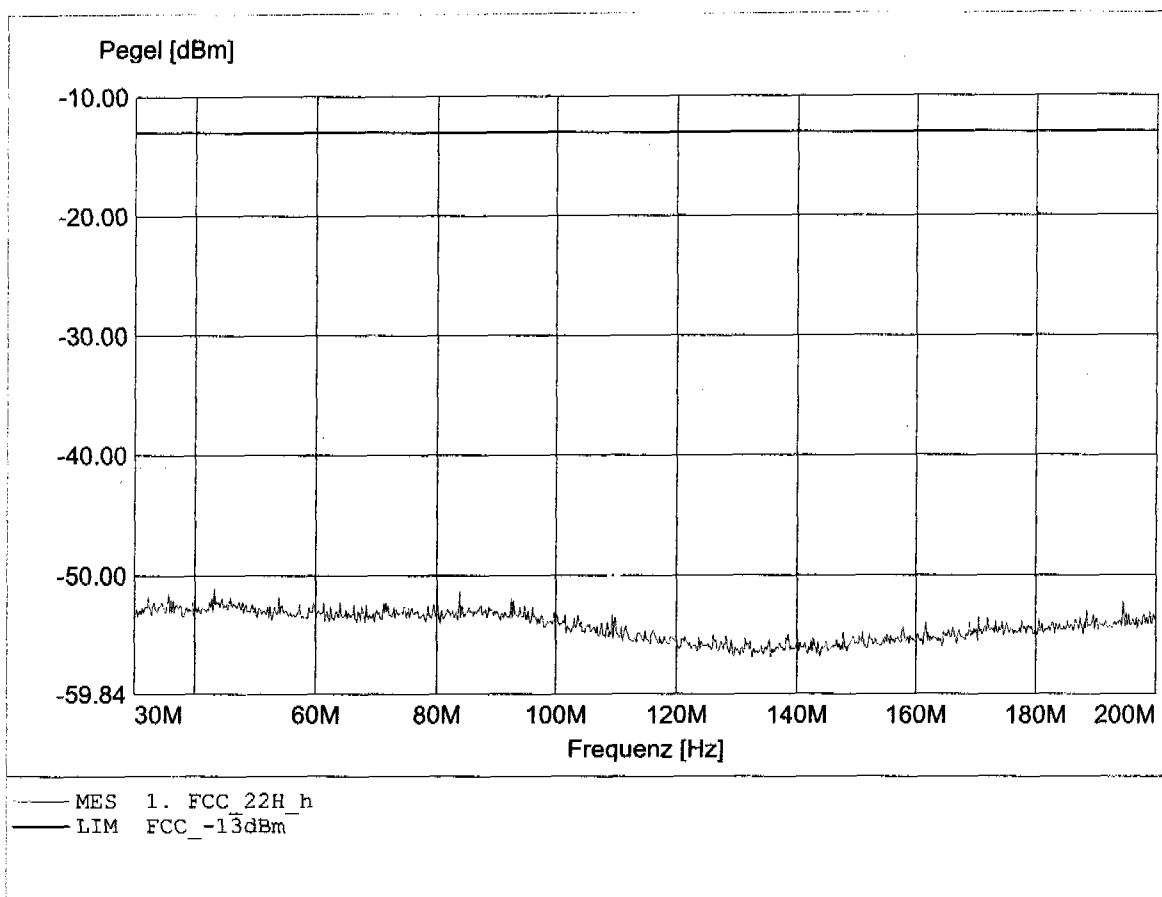


Radiated Emissions Tx
FCC RULES PART 22 SUBPART H

EUT/Model : Dual Band Mobile Handset / EB-G60U
Channel: 128
Approval Holder: Compal Communications Inc.
Test Site / Operator: ETS / Mr. F.Schulz
Temperature/ Voltage: 23°C / Unom. : 3.8 VDC
Test Specification: according to S22.917
Comment 1: Dist.: 3m, Ant.: HL 223
Comment 2: Freq: 824.000MHz, Pmax: -17.72dBm, RBW: 1MHz

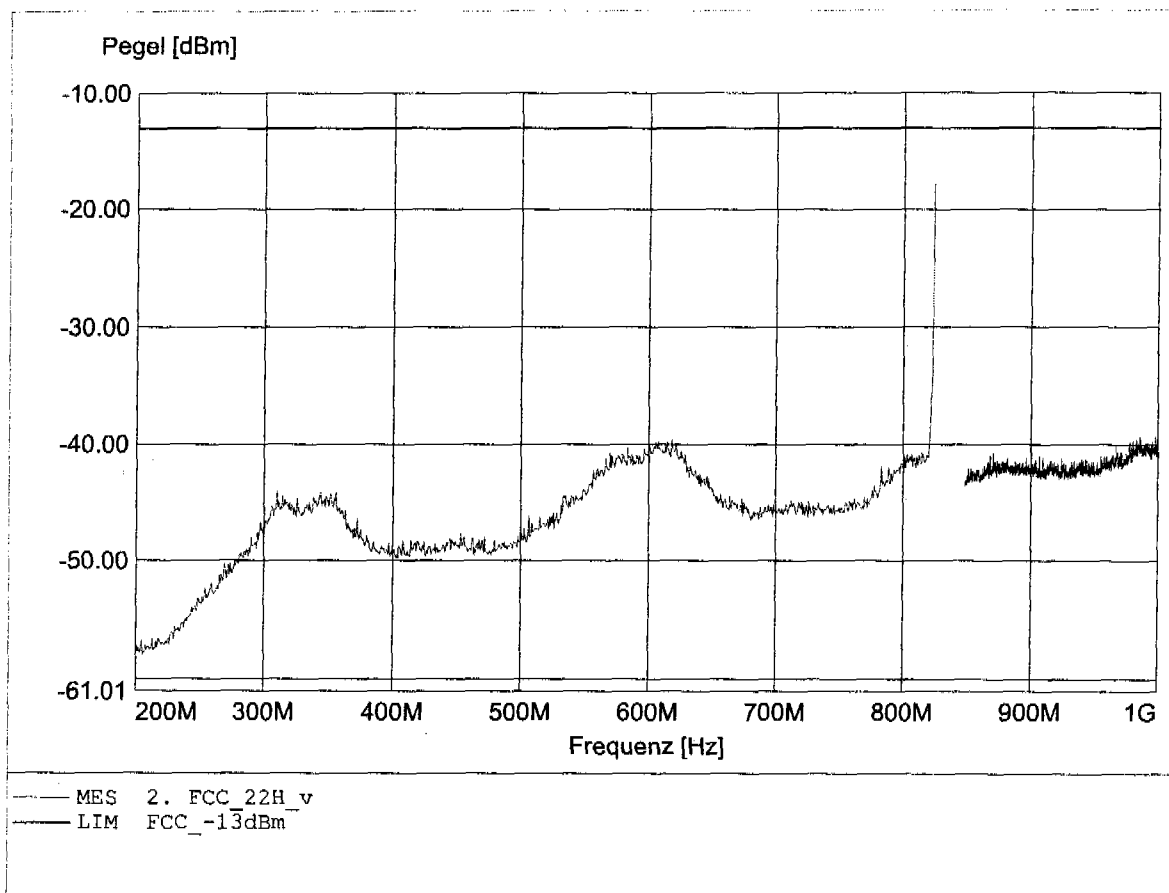


Radiated Emissions Tx
FCC RULES PART 22 SUBPART H

EUT/Model : Dual Band Mobile Handset / EB-G60U
Channel: 128
Approval Holder: Compal Communications Inc.
Test Site / Operator: ETS / Mr. F.Schulz
Temperature/ Voltage: 23°C / Unom. : 3.8 VDC
Test Specification: according to S22.917
Comment 1: Dist.: 3m, Ant.: HL 223
Comment 2: Freq: 824.000MHz, Pmax: -21.68dBm, RBW: 1MHz

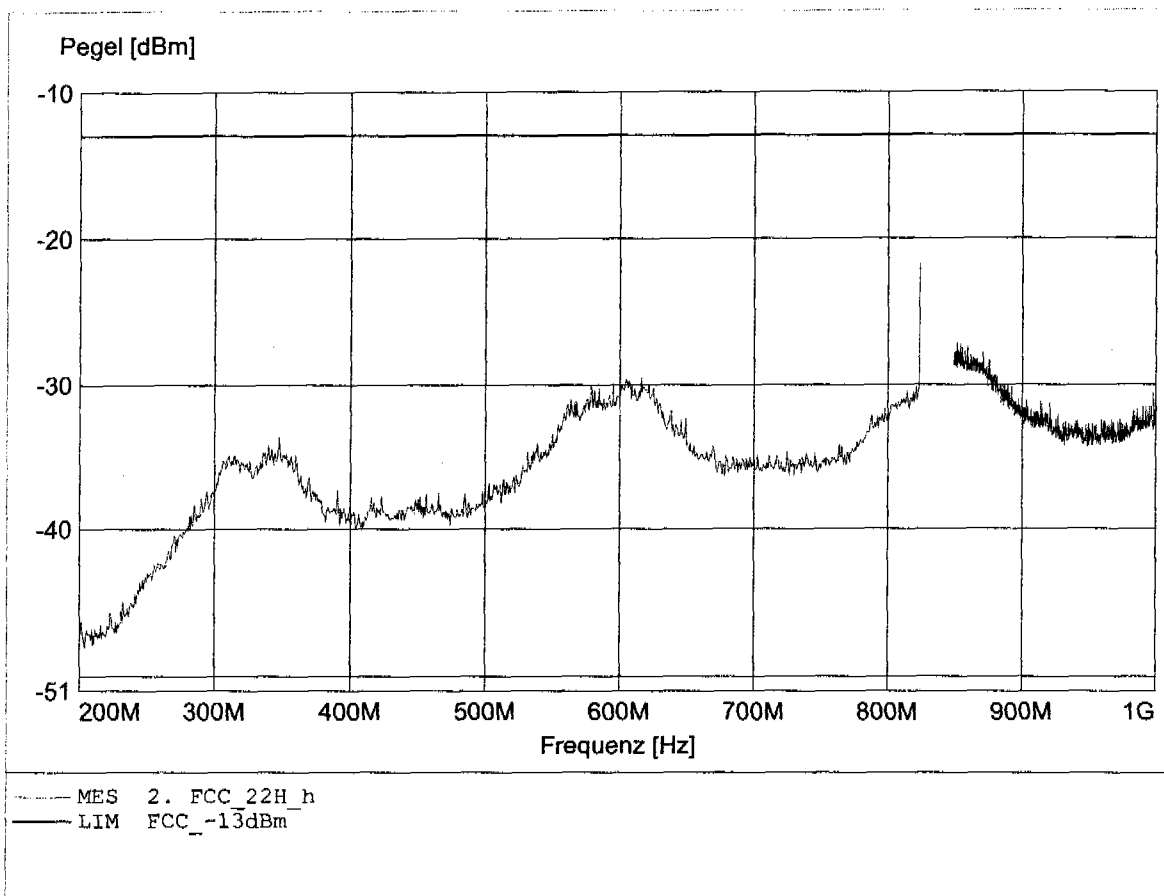


Radiated Emissions Tx
FCC RULES PART 22 SUBPART H

EUT/Model : Dual Band Mobile Handset / EB-G60U
Channel: 128
Approval Holder: Compal Communications Inc.
Test Site / Operator: ETS / Mr. F.Schulz
Temperature/ Voltage: 23°C / Unom. : 3.8 VDC
Test Specification: according to §22.917
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq: 3.923GHz, Pmax: -22.31dBm, RBW: 1MHz

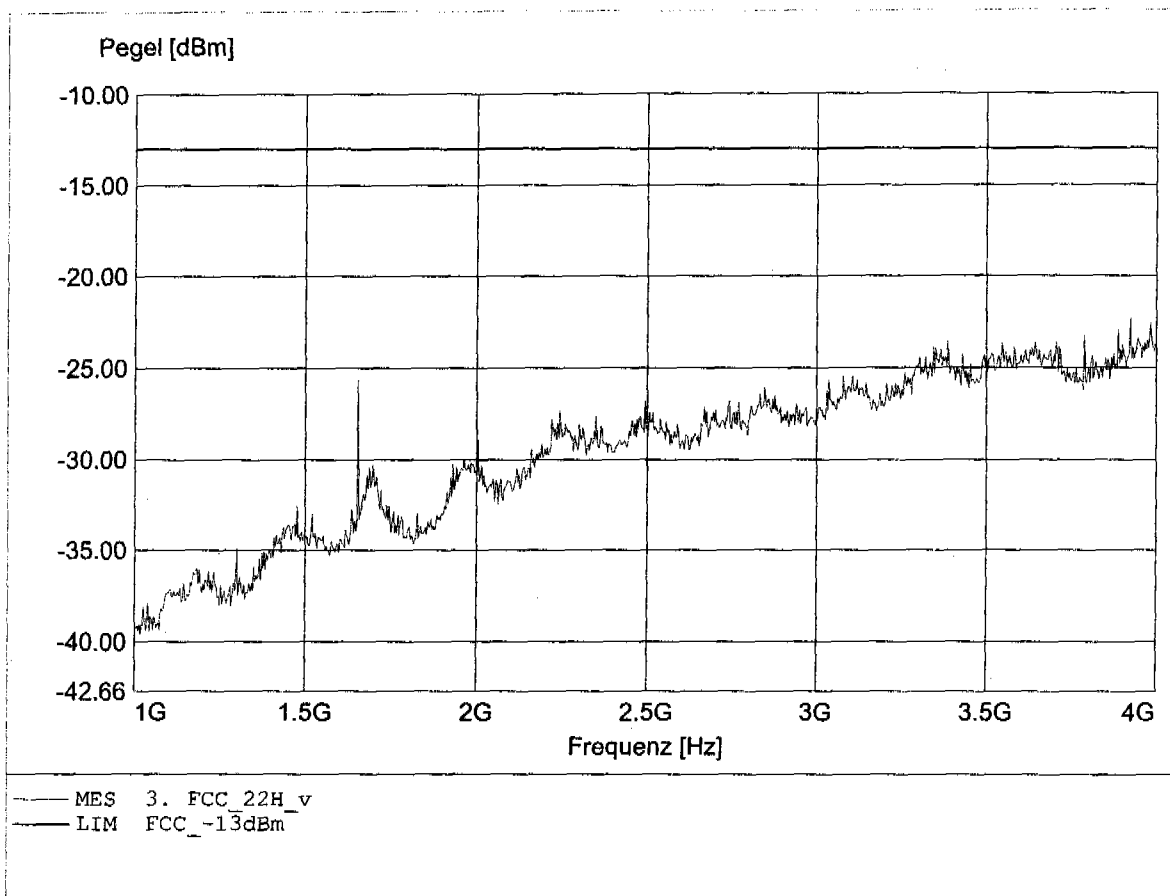


Radiated Emissions Tx
FCC RULES PART 22 SUBPART H

EUT/Model : Dual Band Mobile Handset / EB-G60U
Channel: 128
Approval Holder: Compal Communications Inc.
Test Site / Operator: ETS / Mr. F.Schulz
Temperature/ Voltage: 23°C / Unom. : 3.8 VDC
Test Specification: according to §22.917
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq: 3.970GHz, Pmax: -22.48dBm, RBW: 1MHz

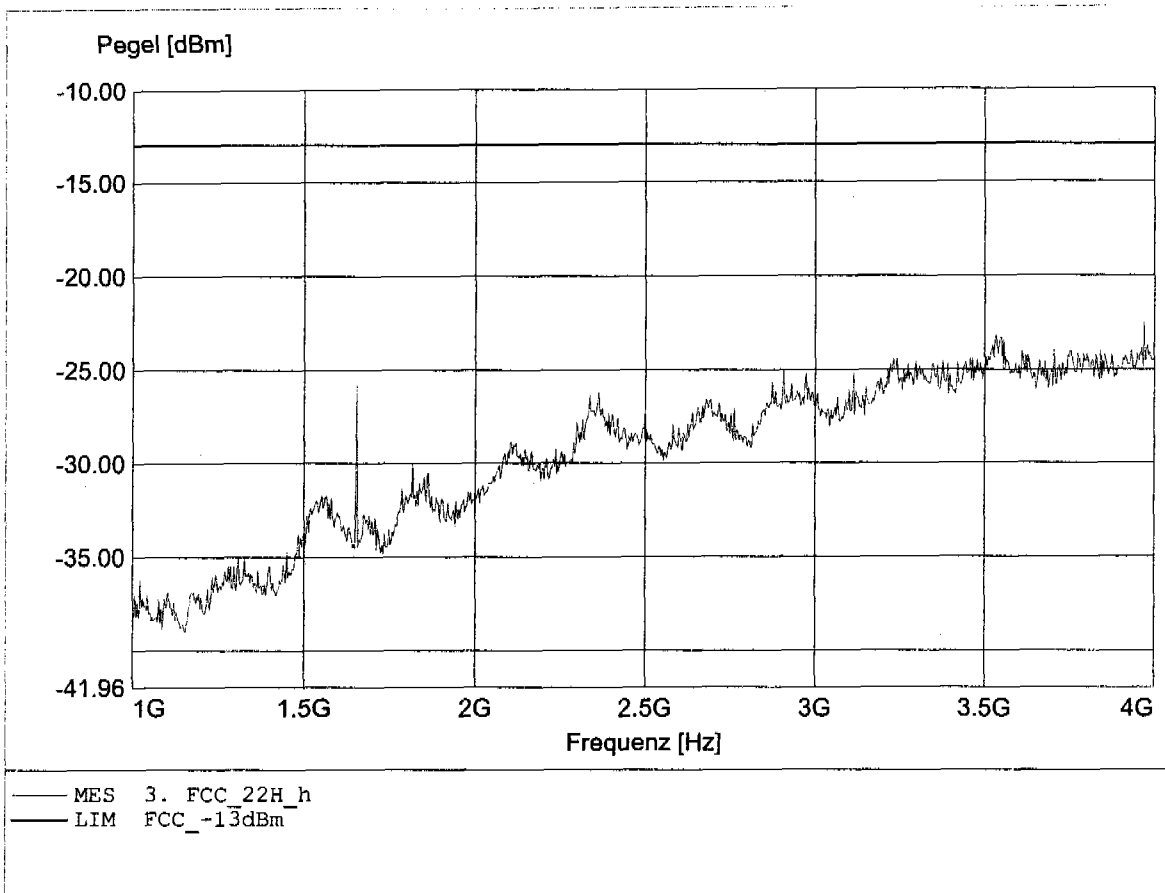


Radiated Emissions Tx
FCC RULES PART 22 SUBPART H

EUT/Model : Dual Band Mobile Handset / EB-G60U
Channel: 128
Approval Holder: Compal Communications Inc.
Test Site / Operator: ETS / Mr. F.Schulz
Temperature/ Voltage: 23°C / Unom. : 3.8 VDC
Test Specification: according to §22.917
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 5.773GHz, Pmax: -41.31dBm, RBW: 1MHz

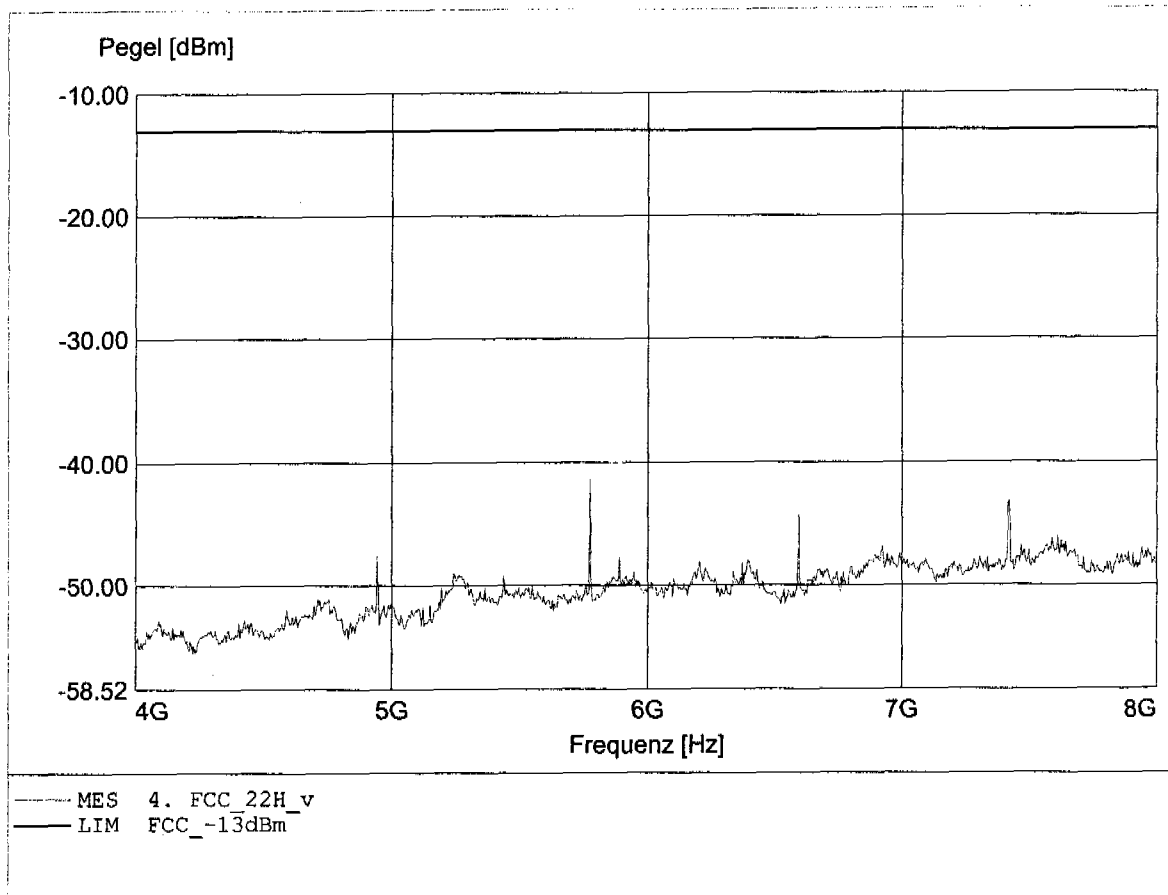


Radiated Emissions Tx
FCC RULES PART 22 SUBPART H

EUT/Model : Dual Band Mobile Handset / EB-G60U
Channel: 128
Approval Holder: Compal Communications Inc.
Test Site / Operator: ETS / Mr. F.Schulz
Temperature/ Voltage: 23°C / Unom. : 3.8 VDC
Test Specification: according to §22.917
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 7.422GHz, Pmax: -41.75dBm, RBW: 1MHz

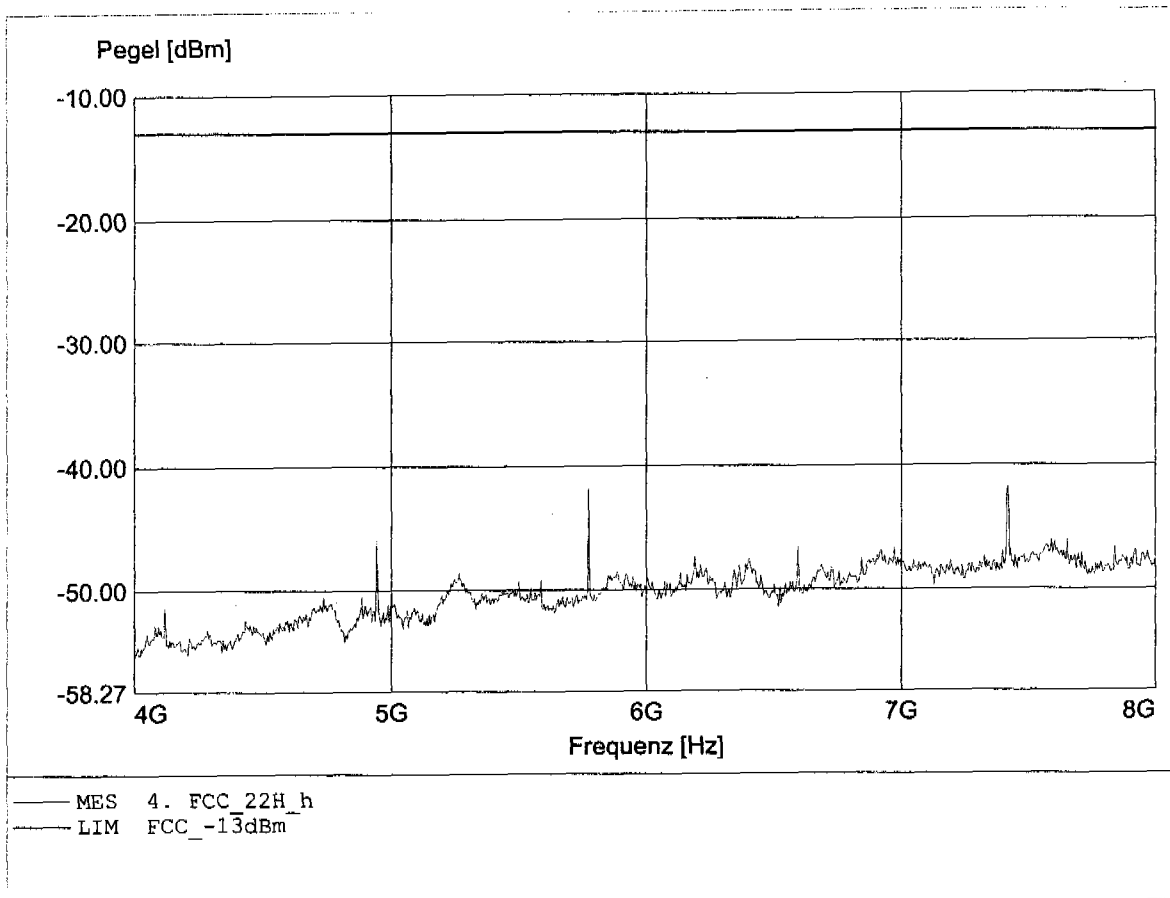


Radiated Emissions Tx
FCC RULES PART 22 SUBPART H

EUT/Model : Dual Band Mobile Handset / EB-G60U
Channel: 128
Approval Holder: Compal Communications Inc..
Test Site / Operator: ETS / Mr. F.Schulz
Temperature/ Voltage: 23°C / Unom. : 3.8 VDC
Test Specification: according to §22.917
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 10.747GHz, Pmax: -41.42dBm, RBW: 1MHz

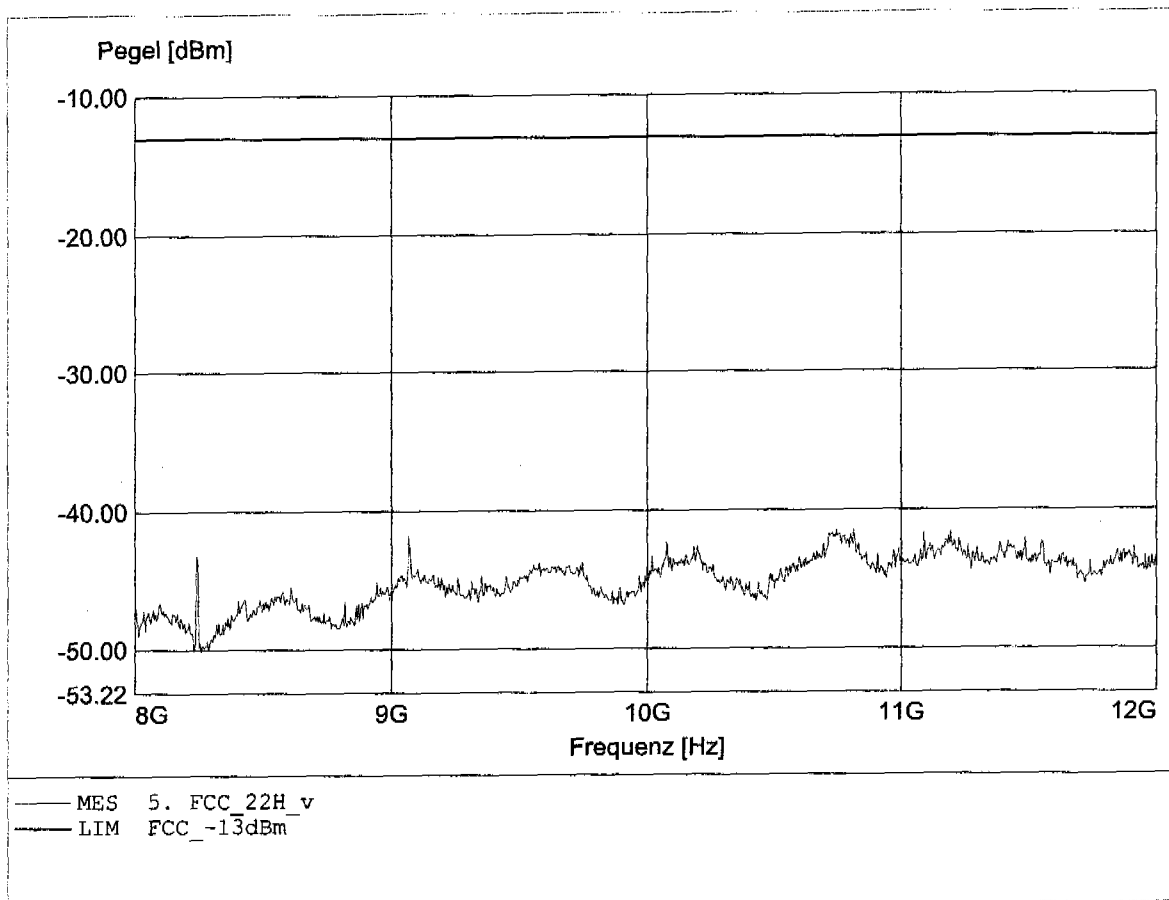


Radiated Emissions Tx
FCC RULES PART 22 SUBPART H

EUT/Model : Dual Band Mobile Handset / EB-G60U
Channel: 128
Approval Holder: Compal Communications Inc.
Test Site / Operator: ETS / Mr. F.Schulz
Temperature/ Voltage: 23°C / Unom. : 3.8 VDC
Test Specification: according to S22.917
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 8.244GHz, Pmax: -40.02dBm, RBW: 1MHz

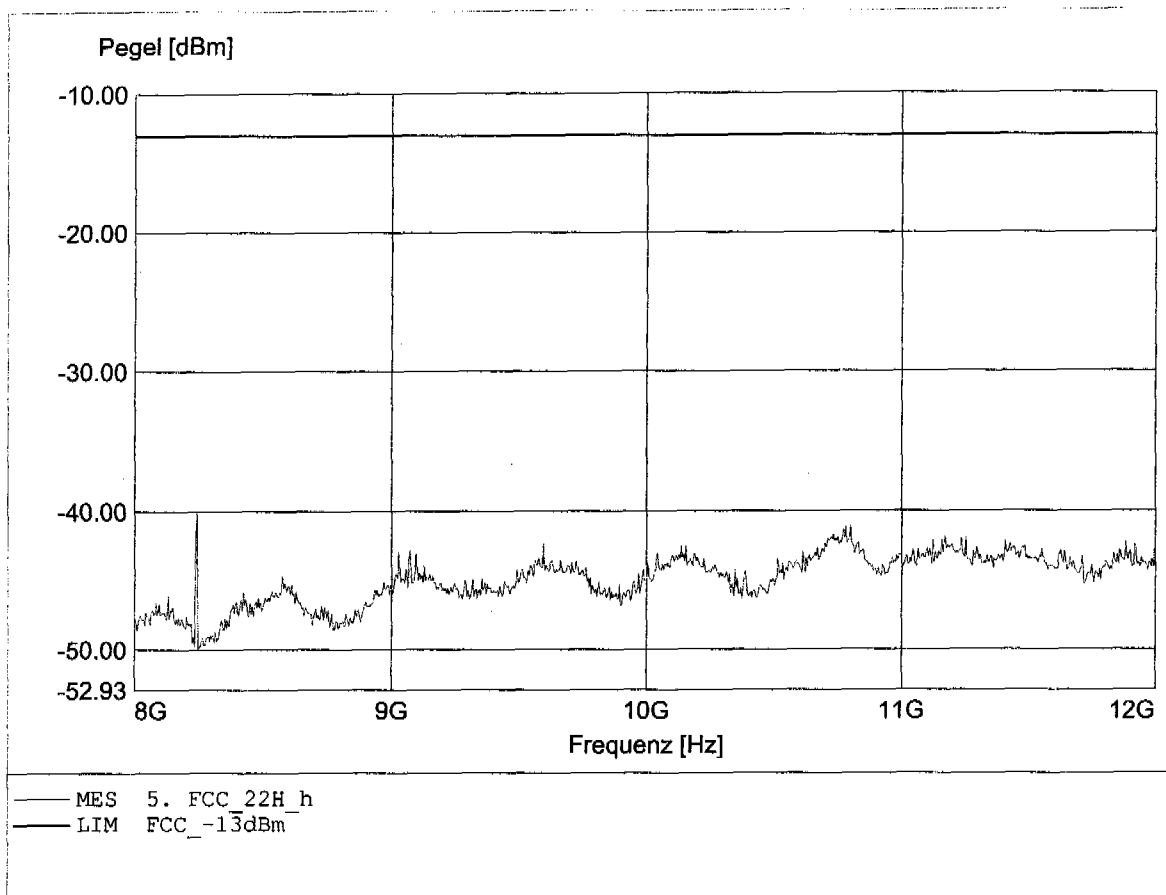


Radiated Emissions Tx
FCC RULES PART 22 SUBPART H

EUT/Model : Dual Band Mobile Handset / EB-G60U
Channel: 188
Approval Holder: Compal Communications Inc.
Test Site / Operator: ETS / Mr. F.Schulz
Temperature/ Voltage: 23°C / Unom. : 3.8 VDC
Test Specification: according to S22.917
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 189.233MHz, Pmax: -51.74dBm, RBW: 1MHz

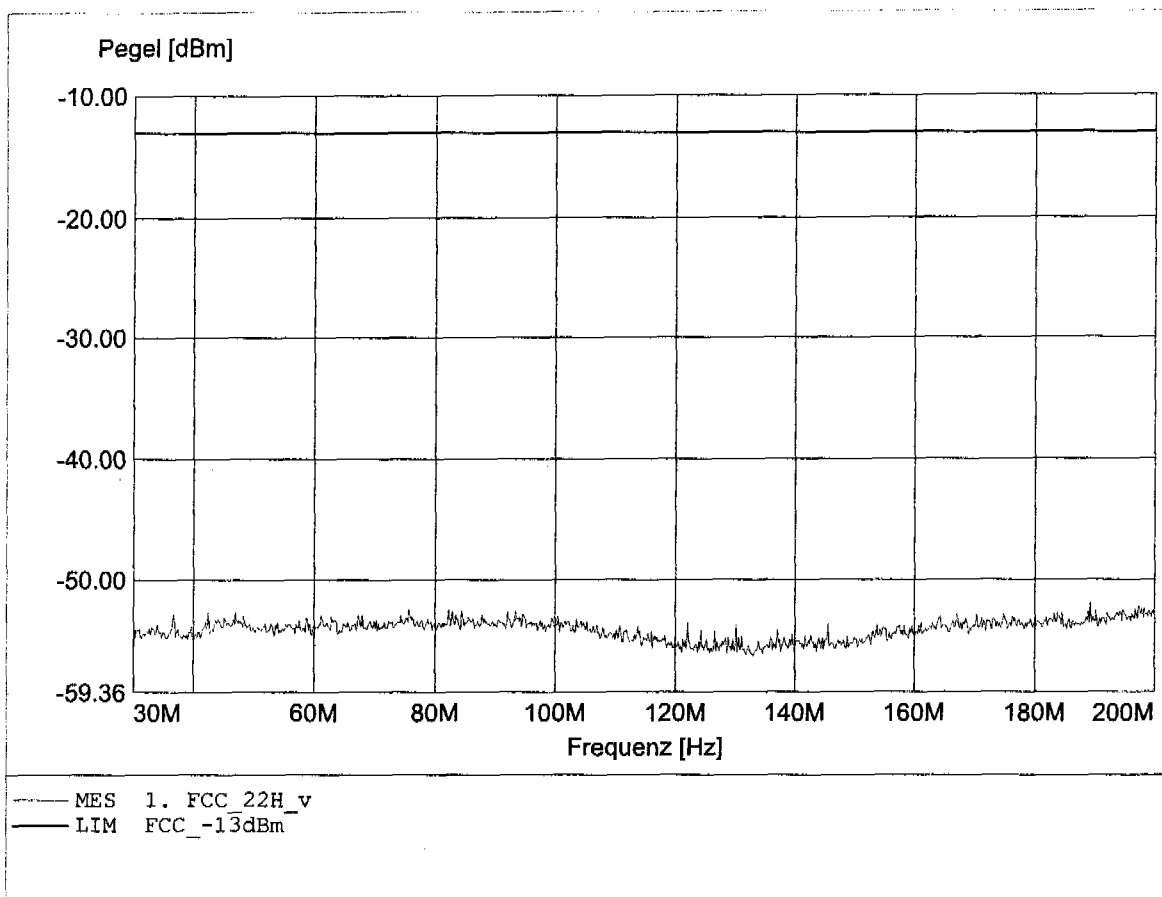


Radiated Emissions Tx
FCC RULES PART 22 SUBPART H

EUT/Model : Dual Band Mobile Handset / EB-G60U
Channel: 188
Approval Holder: Compal Communications Inc.
Test Site / Operator: ETS / Mr. F.Schulz
Temperature/ Voltage: 23°C / Unom. : 3.8 VDC
Test Specification: according to S22.917
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 42.089MHz, Pmax: -51.18dBm, RBW: 1MHz

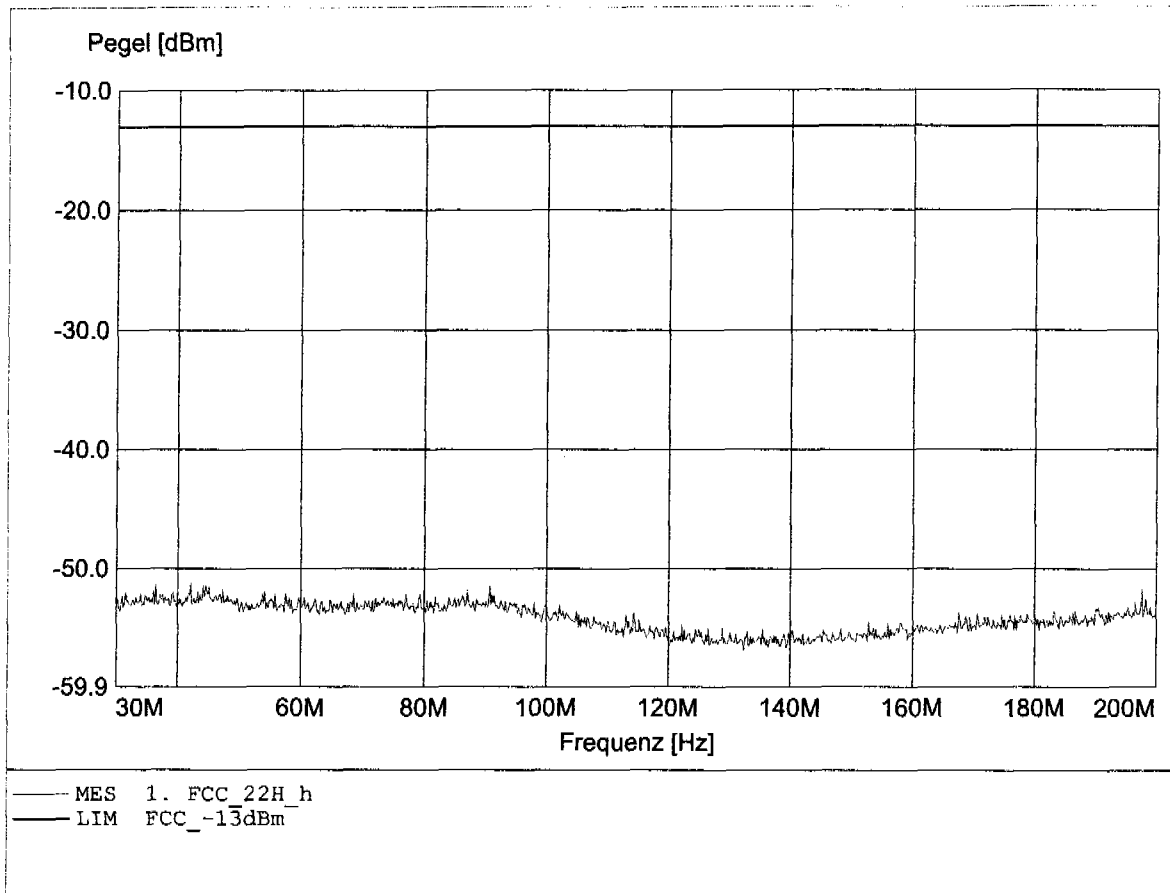


Radiated Emissions Tx
FCC RULES PART 22 SUBPART H

EUT/Model : Dual Band Mobile Handset / EB-G60U
Channel: 188
Approval Holder: Compal Communications Inc.
Test Site / Operator: ETS. / Mr. F.Schulz
Temperature/ Voltage: 23°C / Unom. : 3.8 VDC
Test Specification: according to S22.917
Comment 1: Dist.: 3m, Ant.: HL 223
Comment 2: Freq: 604.213MHz, Pmax: -39.10dBm, RBW: 1MHz

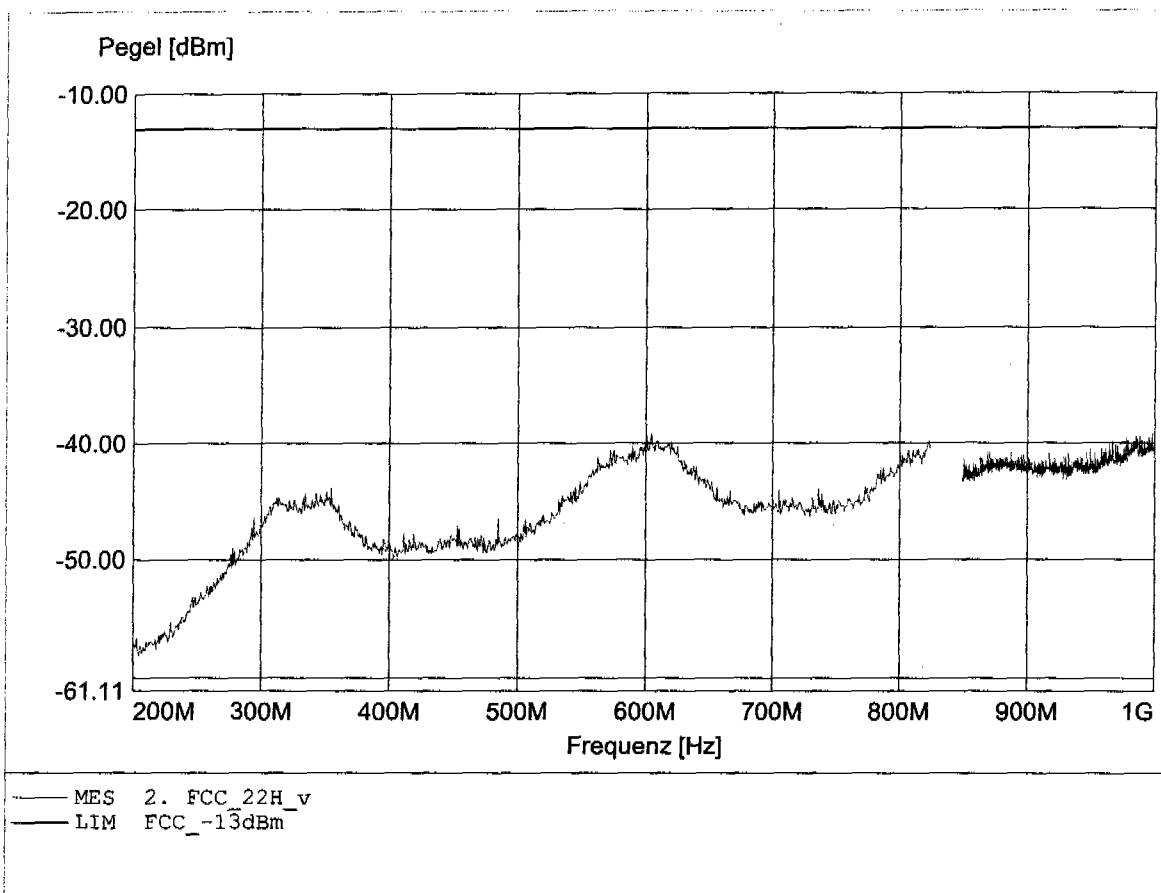


Radiated Emissions Tx
FCC RULES PART 22 SUBPART H

EUT/Model : Dual Band Mobile Handset / EB-G60U
Channel: 188
Approval Holder: Compal Communications Inc.
Test Site / Operator: ETS / Mr. F.Schulz
Temperature/ Voltage: 23°C / Unom. : 3.8 VDC
Test Specification: according to S22.917
Comment 1: Dist.: 3m, Ant.: HL 223
Comment 2: Freq: 852.859MHz, Pmax: -27.80dBm, RBW: 1MHz

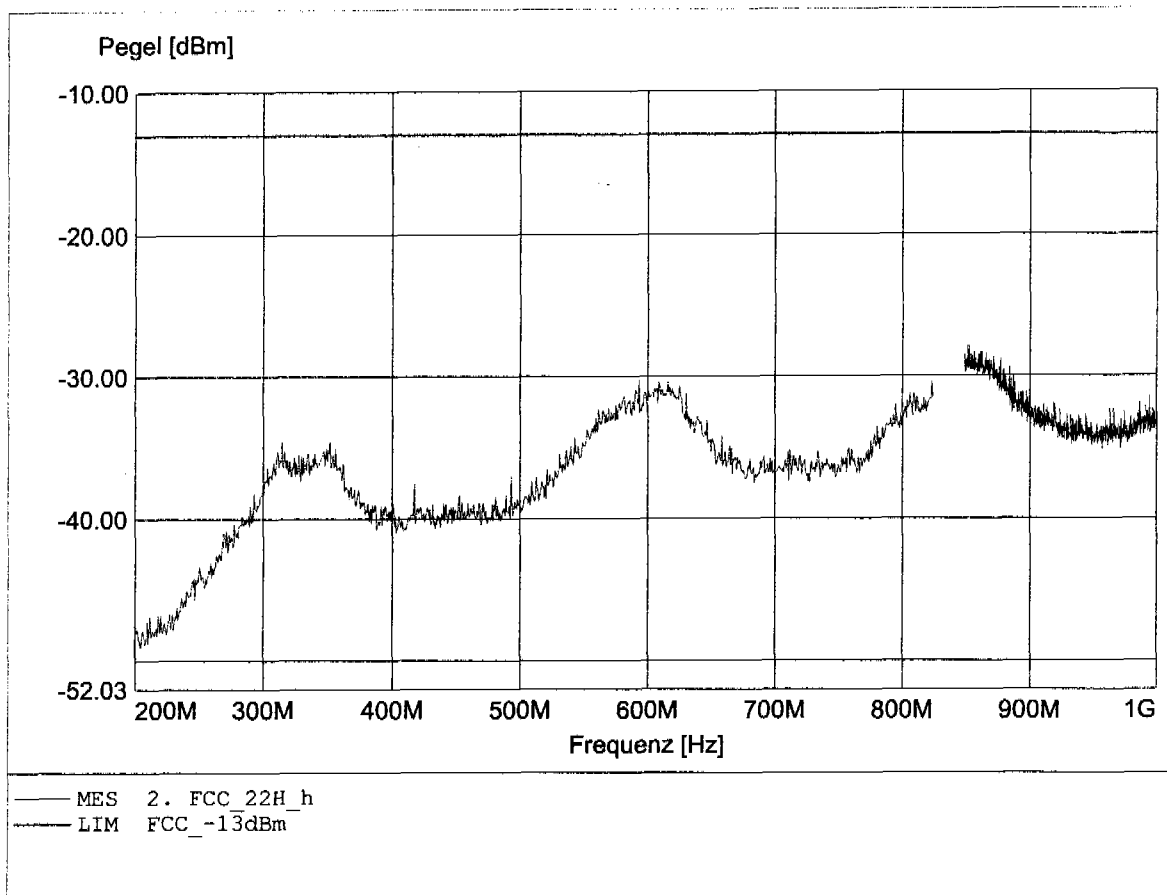


Radiated Emissions Tx
FCC RULES PART 22 SUBPART H

EUT/Model : Dual Band Mobile Handset / EB-G60U
Channel: 188
Approval Holder: Compal Communications Inc.
Test Site / Operator: ETS / Mr. F.Schulz
Temperature/ Voltage: 23°C / Unom. : 3.8 VDC
Test Specification: according to S22.917
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq: 1.677GHz, Pmax: -20.99dBm, RBW: 1MHz

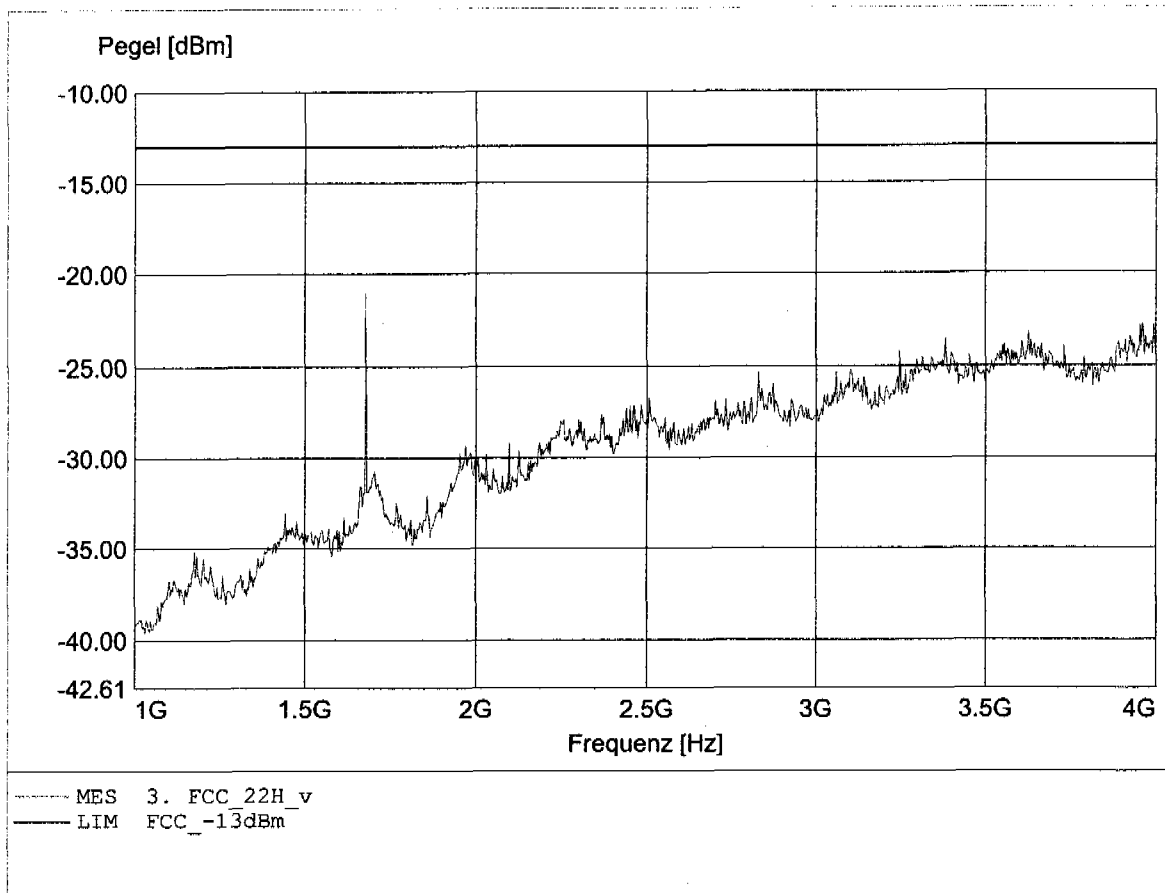


Radiated Emissions Tx
FCC RULES PART 22 SUBPART H

EUT/Model : Dual Band Mobile Handset / EB-G60U
Channel: 188
Approval Holder: Compal Communications Inc.
Test Site / Operator: ETS / Mr. F.Schulz
Temperature/ Voltage: 23°C / Unom. : 3.8 VDC
Test Specification: according to §22.917
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq: 3.527GHz, Pmax: -23.01dBm, RBW: 1MHz

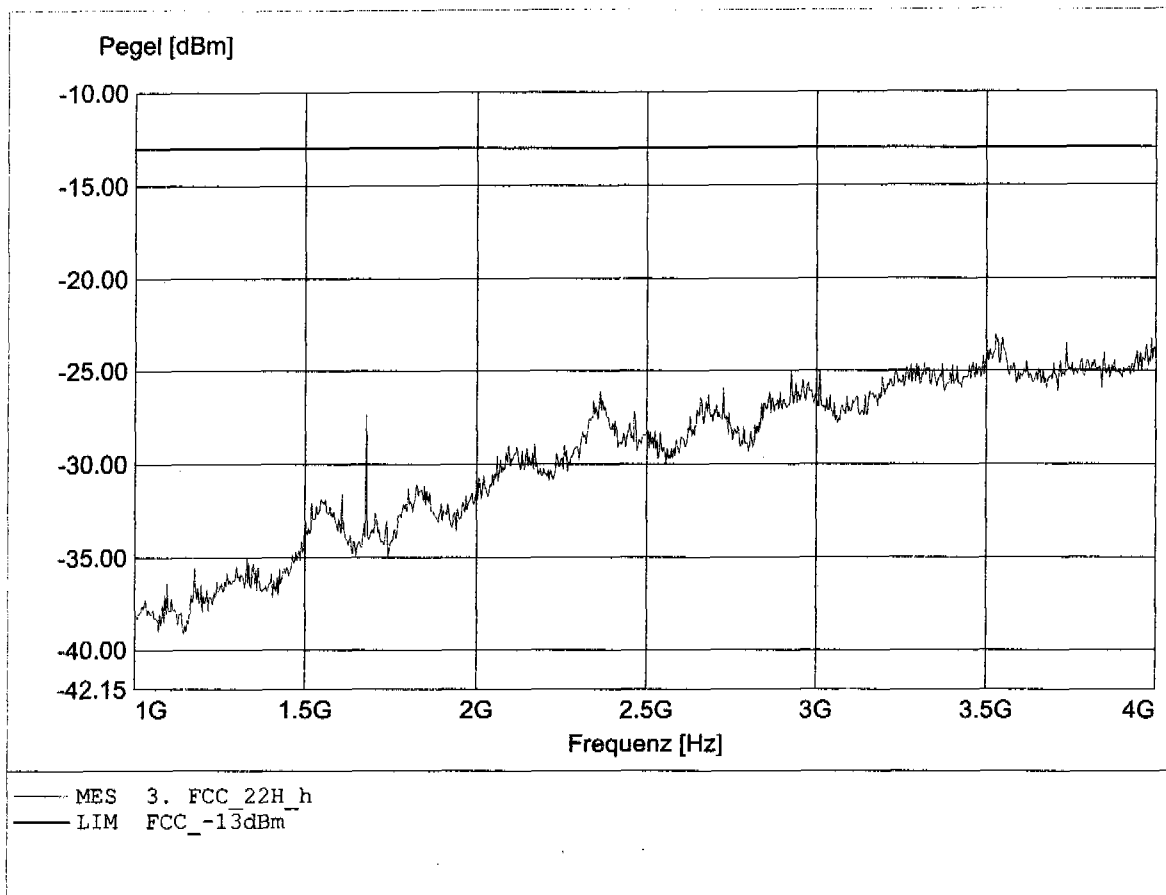


Radiated Emissions Tx
FCC RULES PART 22 SUBPART H

EUT/Model : Dual Band Mobile Handset / EB-G60U
Channel: 188
Approval Holder: Compal Communications Inc.
Test Site / Operator: ETS / Mr. F.Schulz
Temperature/ Voltage: 23°C / Unom. : 3.8 VDC
Test Specification: according to §22.917
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 5.858GHz, Pmax: -38.67dBm, RBW: 1MHz

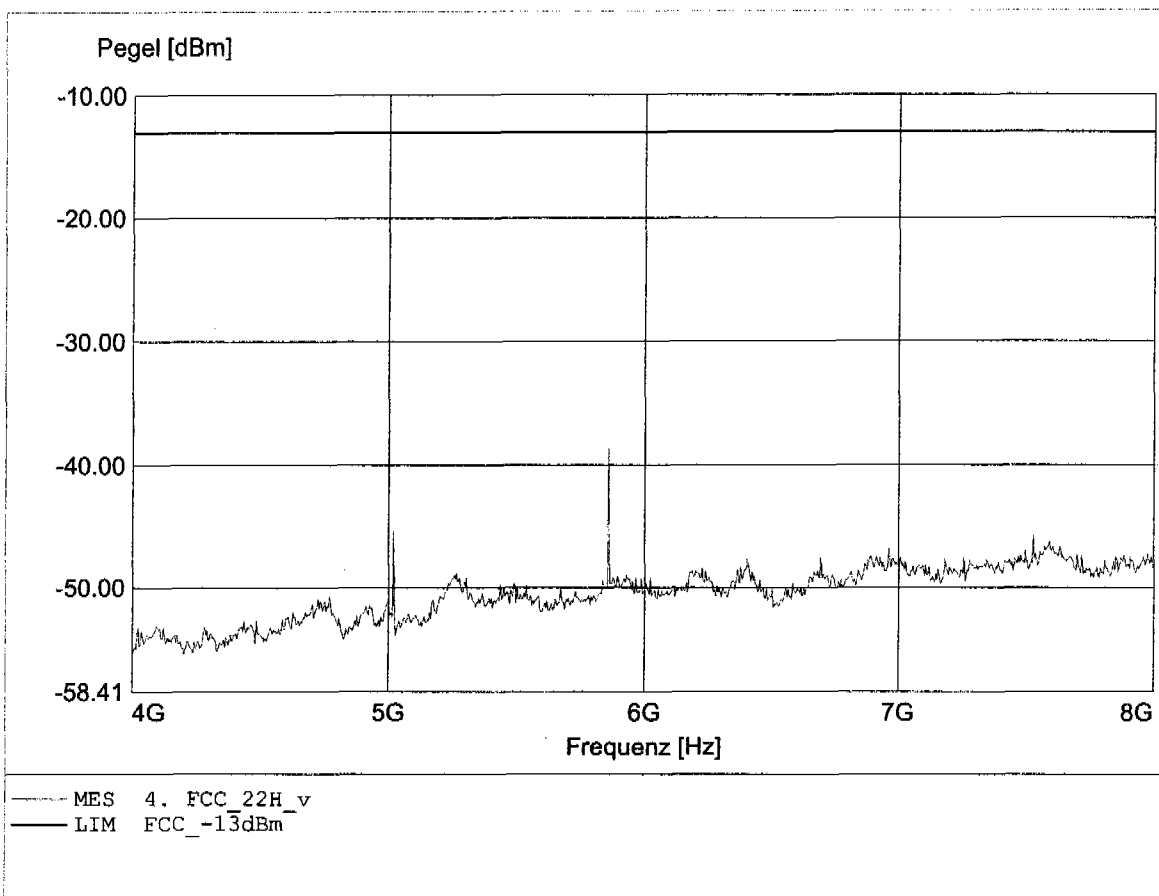


Radiated Emissions Tx
FCC RULES PART 22 SUBPART H

EUT/Model : Dual Band Mobile Handset / EB-G60U
Channel: 188
Approval Holder: Compal Communications Inc.
Test Site / Operator: ETS / Mr. F.Schulz
Temperature/ Voltage: 23°C / Unom. : 3.8 VDC
Test Specification: according to S22.917
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 5.858GHz, Pmax: -38.78dBm, RBW: 1MHz

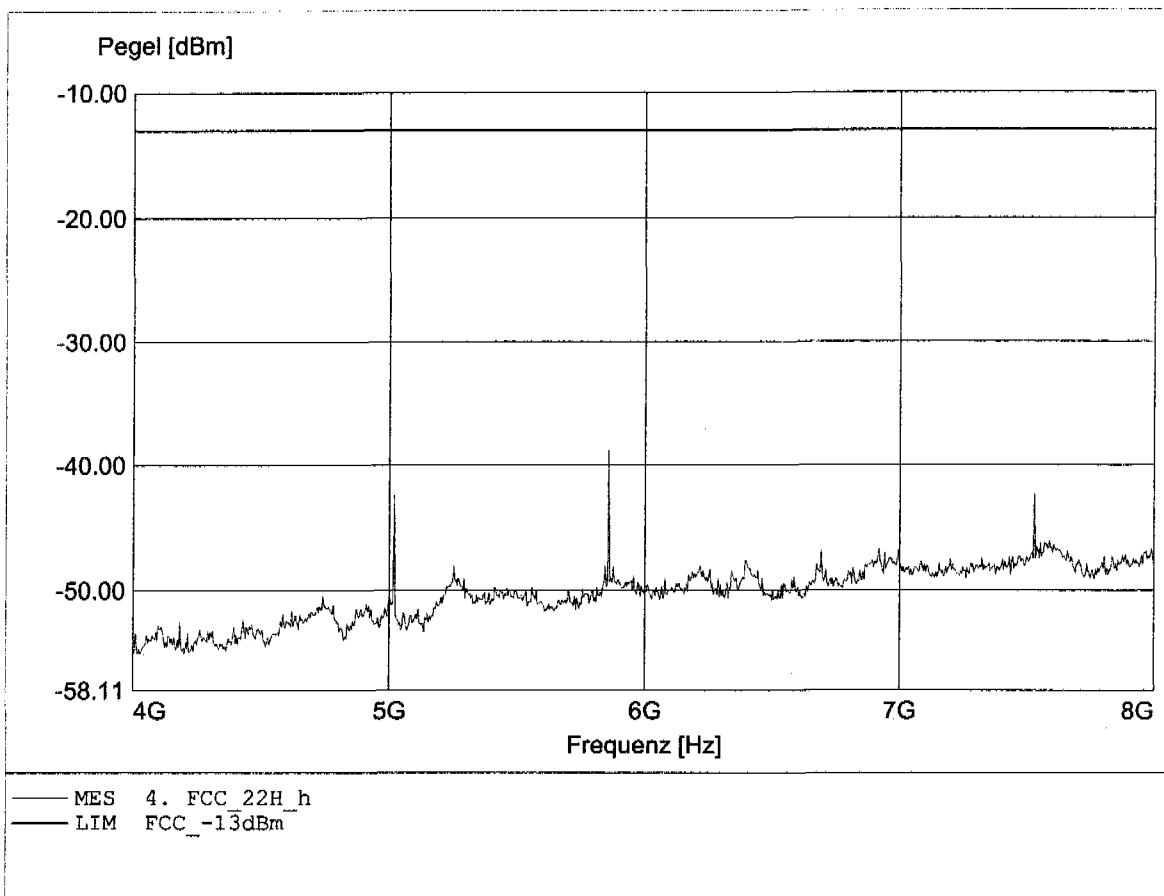


Radiated Emissions Tx
FCC RULES PART 22 SUBPART H

EUT/Model : Dual Band Mobile Handset / EB-G60U
Channel: 188
Approval Holder: Compal Communications Inc.
Test Site / Operator: ETS / Mr. F.Schulz
Temperature/ Voltage: 23°C / Unom. : 3.8 VDC
Test Specification: according to §22.917
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 10.036GHz, Pmax: -40.44dBm, RBW: 1MHz

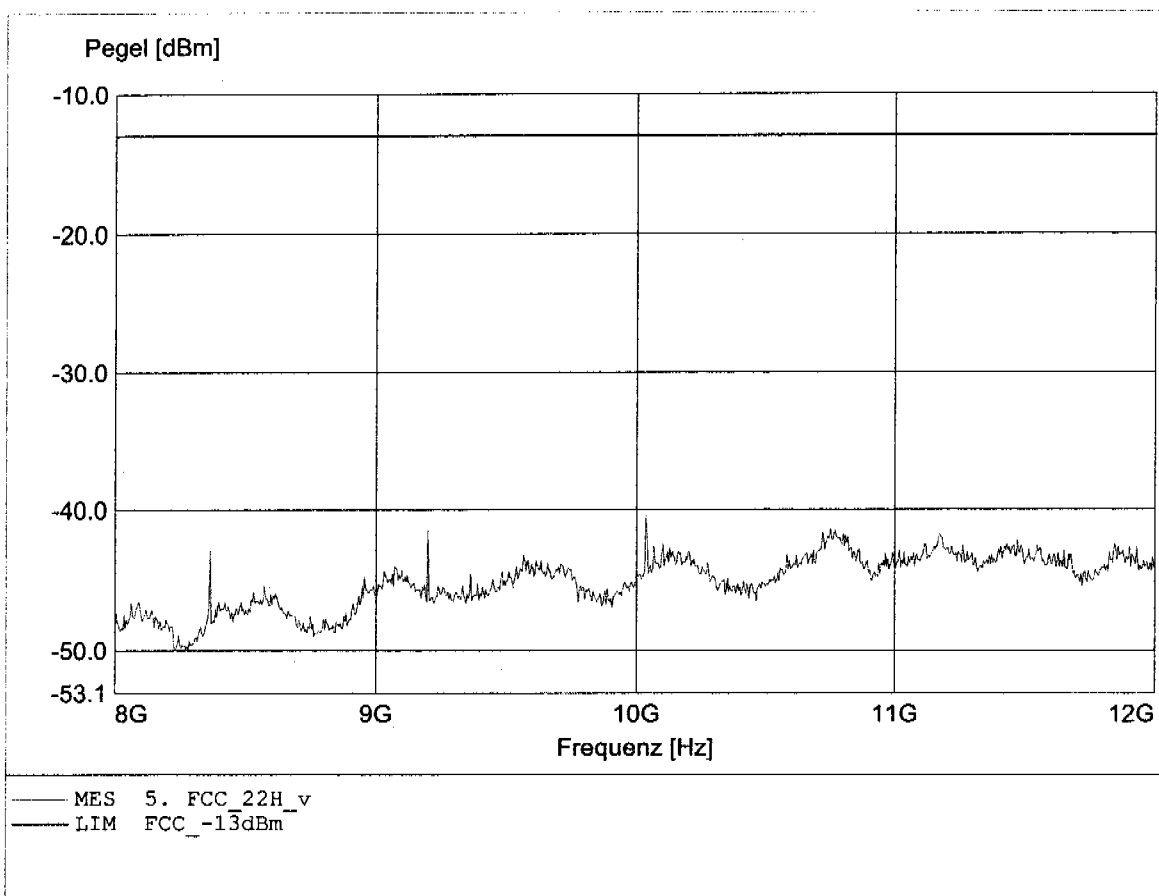


Radiated Emissions Tx
FCC RULES PART 22 SUBPART H

EUT/Model : Dual Band Mobile Handset / EB-G60U
Channel: 188
Approval Holder: Compal Communications Inc.
Test Site / Operator: ETS / Mr. F.Schulz
Temperature/ Voltage: 23°C / Unom. : 3.8 VDC
Test Specification: according to S22.917
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 10.036GHz, Pmax: -38.43dBm, RBW: 1MHz

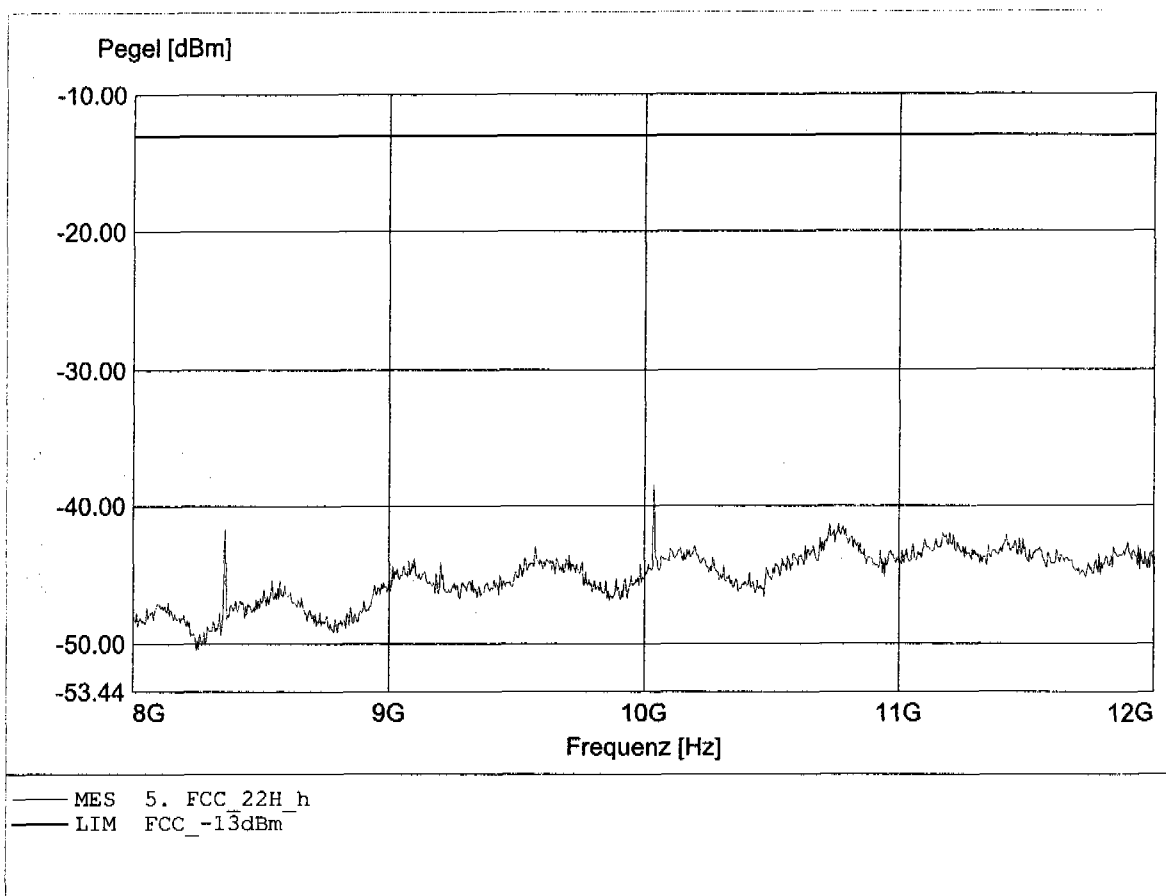


Radiated Emissions Tx
FCC RULES PART 22 SUBPART H

EUT/Model : Dual Band Mobile Handset / EB-G60U
Channel: 251
Approval Holder: Compal Communications Inc.
Test Site / Operator: ETS / Mr. F.Schulz
Temperature/ Voltage: 23°C / Unom. : 3.8 VDC
Test Specification: according to §22.917
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 196.033MHz, Pmax: -52.04dBm, RBW: 1MHz

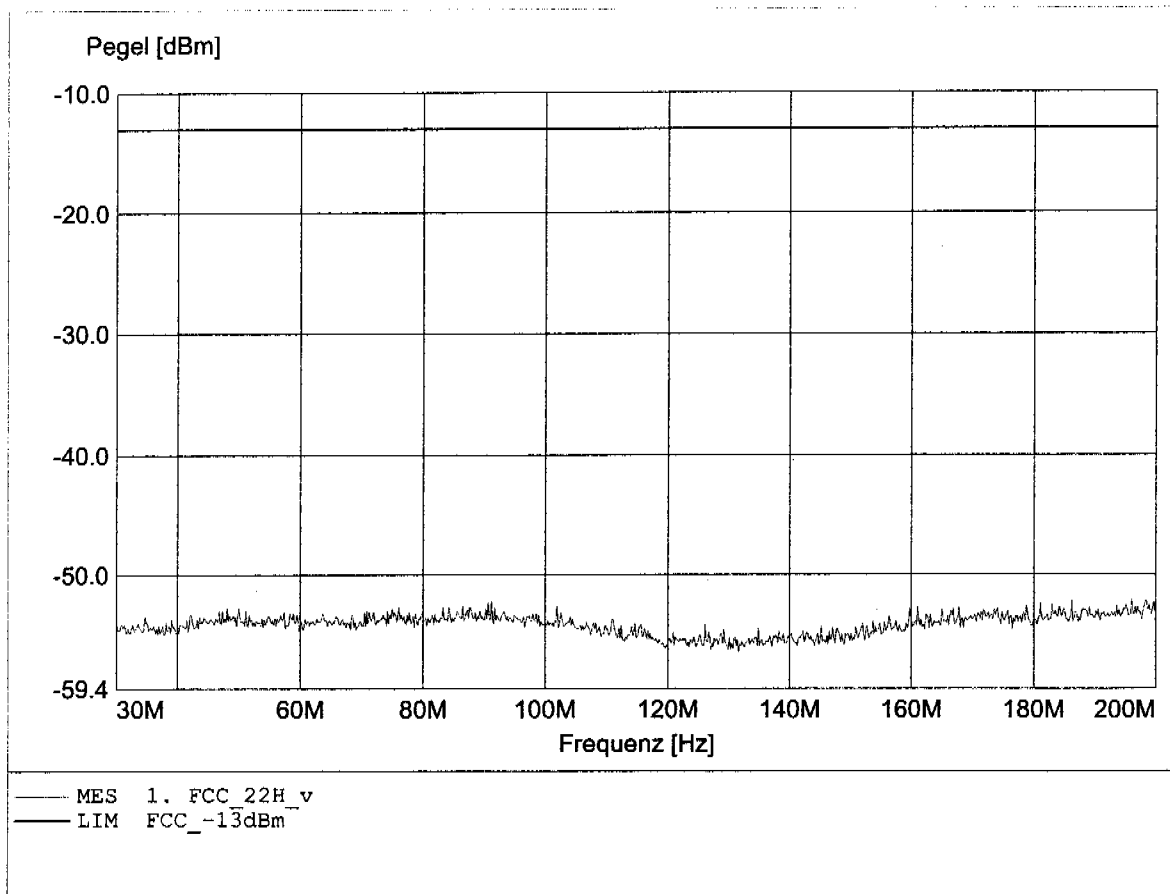


Radiated Emissions Tx
FCC RULES PART 22 SUBPART H

EUT/Model : Dual Band Mobile Handset / EB-G60U
Channel: 251
Approval Holder: Compal Communications Inc.
Test Site / Operator: ETS / Mr. F.Schulz
Temperature/ Voltage: 23°C / Unom. : 3.8 VDC
Test Specification: according to §22.917
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 46.622MHz, Pmax: -51.40dBm, RBW: 1MHz

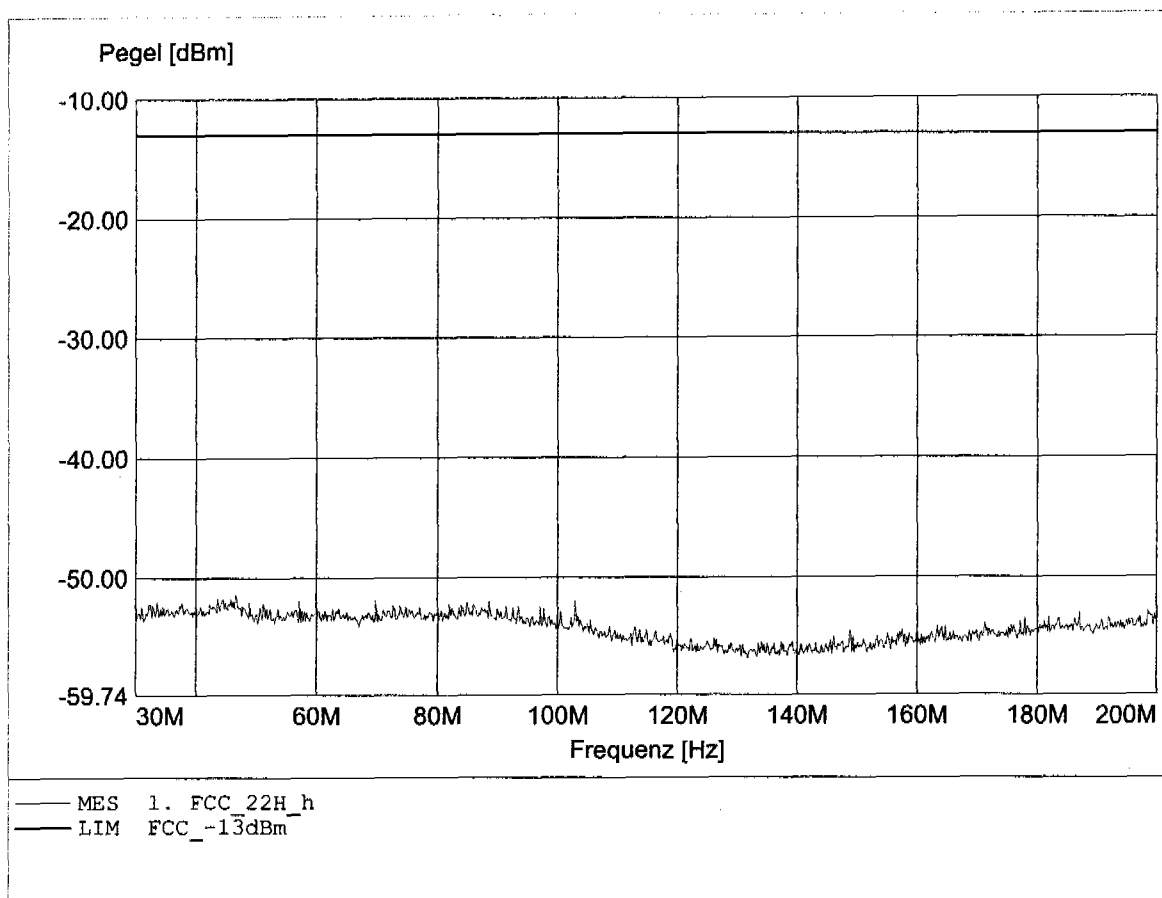


Radiated Emissions Tx
FCC RULES PART 22 SUBPART H

EUT/Model : Dual Band Mobile Handset / EB-G60U
Channel: 251
Approval Holder: Compal Communications Inc.
Test Site / Operator: ETS / Mr. F.Schulz
Temperature/ Voltage: 23°C / Unom. : 3.8 VDC
Test Specification: according to §22.917
Comment 1: Dist.: 3m, Ant.: HL 223
Comment 2: Freq: 849.000MHz, Pmax: -15.82dBm, RBW: 1MHz

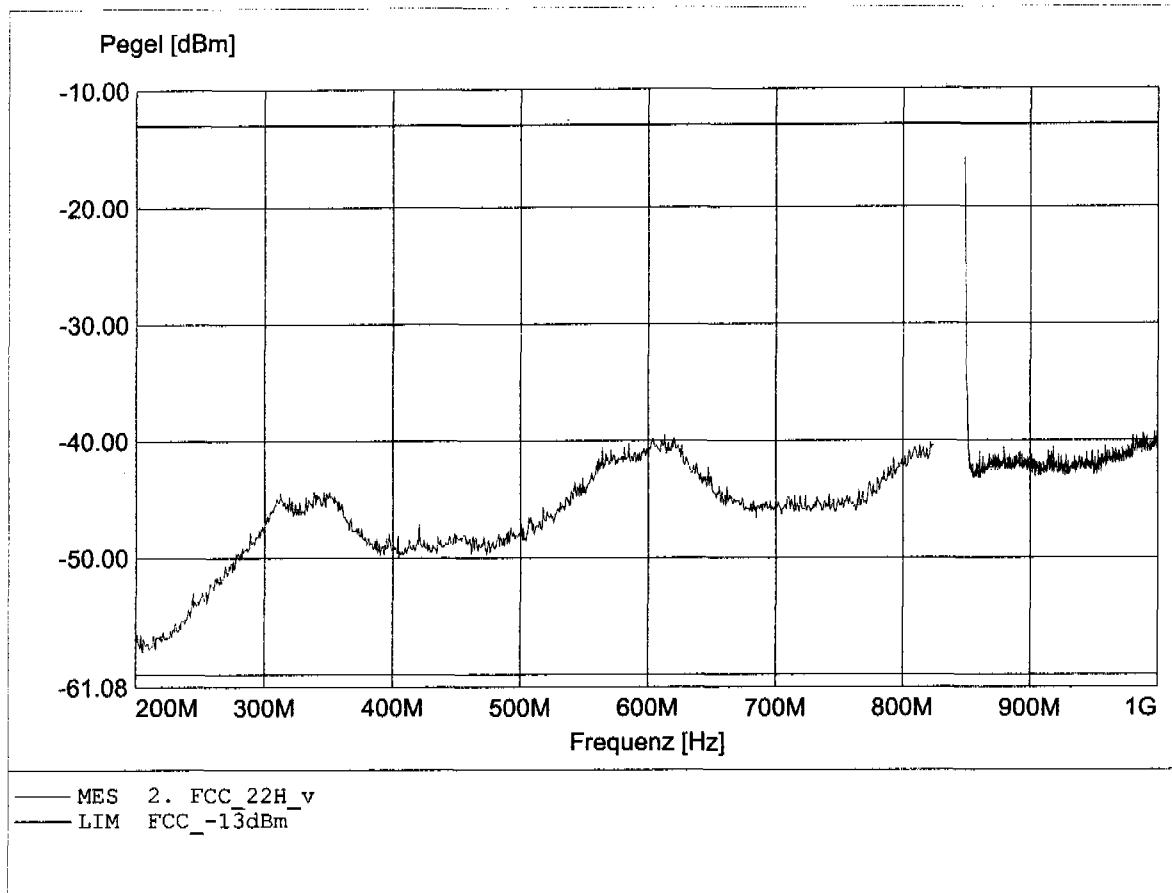


Radiated Emissions Tx
FCC RULES PART 22 SUBPART H

EUT/Model : Dual Band Mobile Handset / EB-G60U
Channel: 251
Approval Holder: Compal Communications Inc.
Test Site / Operator: ETS / Mr. F.Schulz
Temperature/ Voltage: 23°C / Unom. : 3.8 VDC
Test Specification: according to S22.917
Comment 1: Dist.: 3m, Ant.: HL 223
Comment 2: Freq: 849.000MHz, Pmax: -16.98dBm, RBW: 1MHz

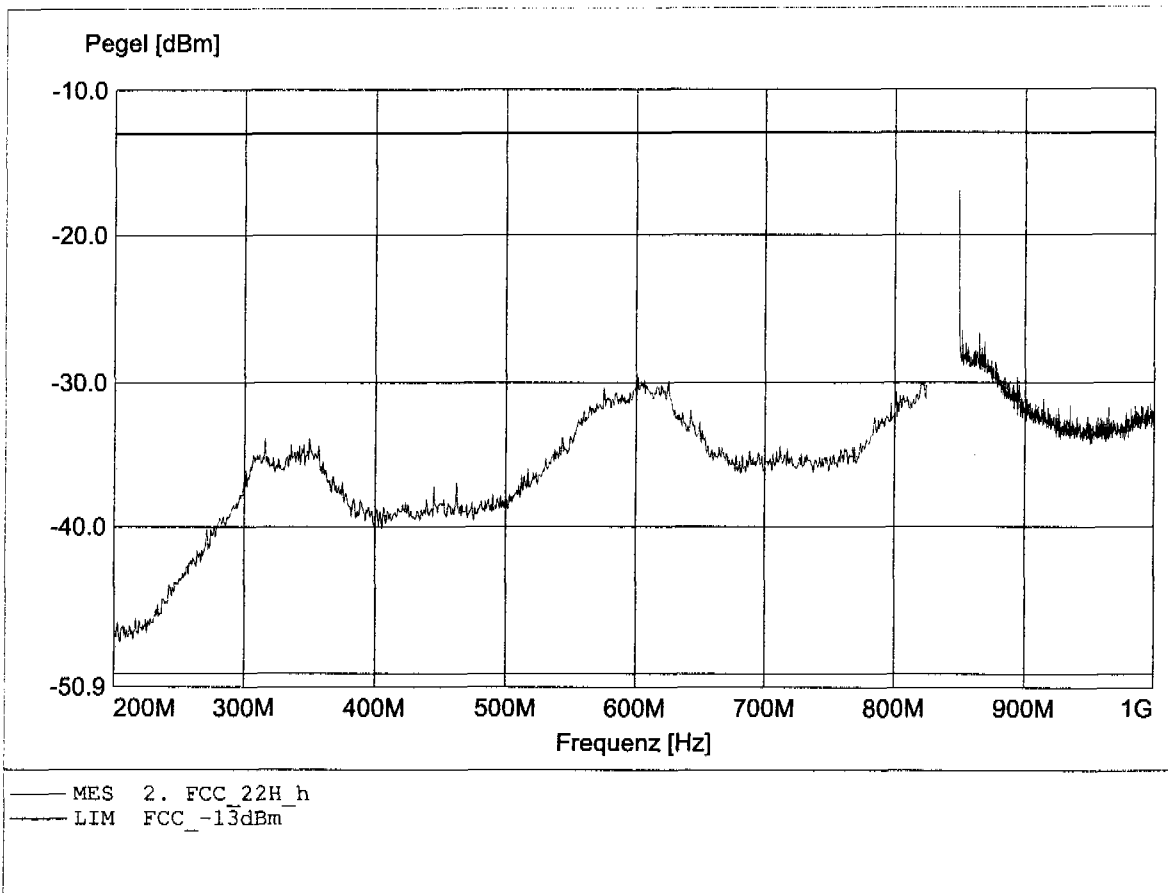


Radiated Emissions Tx
FCC RULES PART 22 SUBPART H

EUT/Model : Dual Band Mobile Handset / EB-G60U
Channel: 251
Approval Holder: Compal Communications Inc.
Test Site / Operator: ETS / Mr. F.Schulz
Temperature/ Voltage: 23°C / Unom. : 3.8 VDC
Test Specification: according to §22.917
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq: 1.700GHz, Pmax: -20.42dBm, RBW: 1MHz

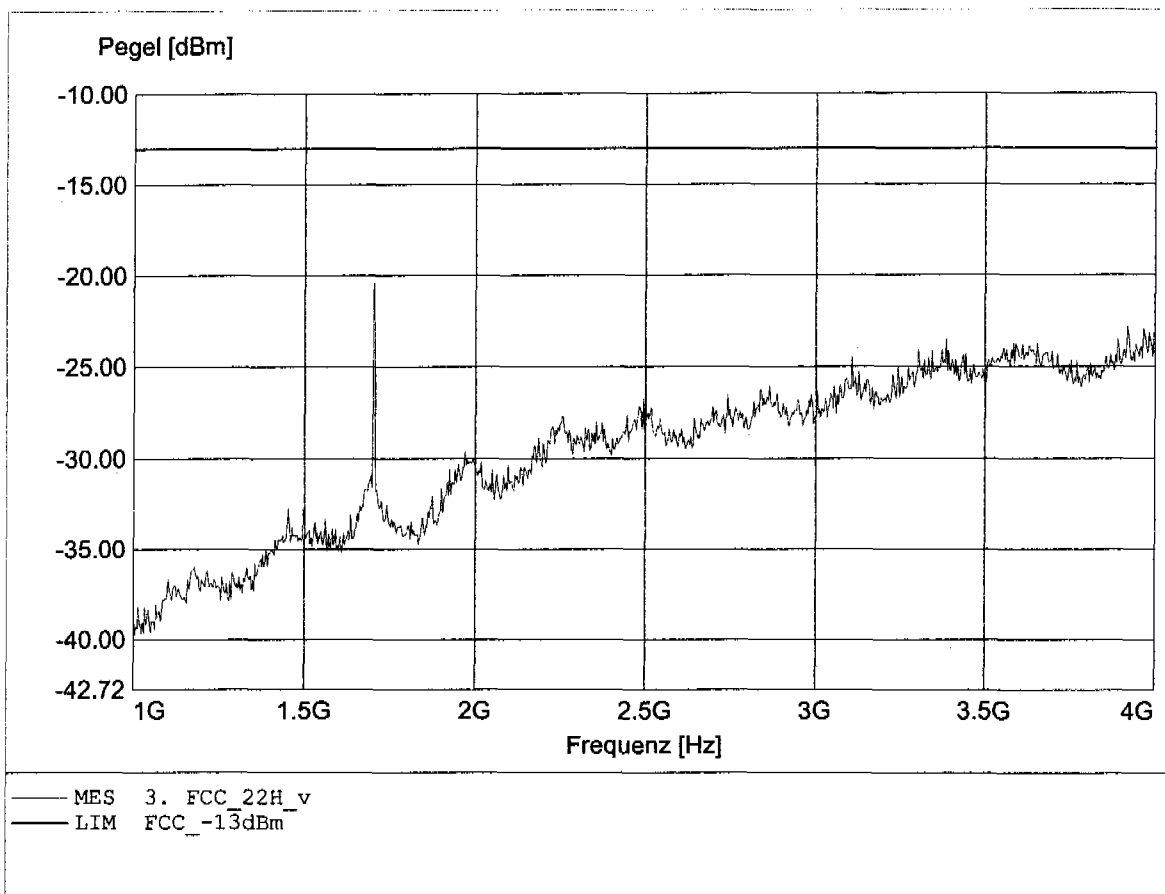


Radiated Emissions Tx
FCC RULES PART 22 SUBPART H

EUT/Model : Dual Band Mobile Handset / EB-G60U
Channel: 251
Approval Holder: Compal Communications Inc.
Test Site / Operator: ETS / Mr. F.Schulz
Temperature/ Voltage: 23°C / Unom. : 3.8 VDC
Test Specification: according to §22.917
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq: 3.523GHz, Pmax: -22.91dBm, RBW: 1MHz

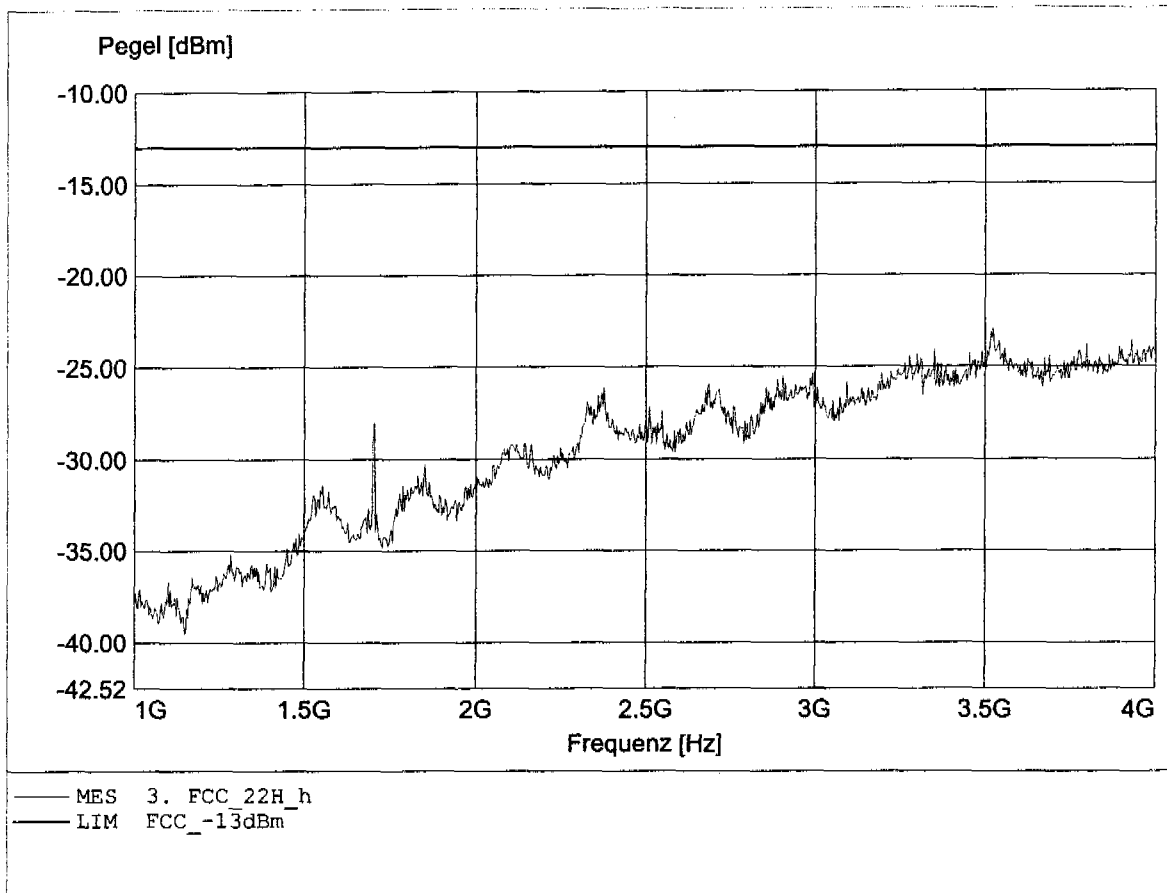


Radiated Emissions Tx
FCC RULES PART 22 SUBPART H

EUT/Model : Dual Band Mobile Handset / EB-G60U
Channel: 251
Approval Holder: Compal Communications Inc.
Test Site / Operator: ETS / Mr. F.Schulz
Temperature/ Voltage: 23°C / Unom. : 3.8 VDC
Test Specification: according to §22.917
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 5.947GHz, Pmax: -39.86dBm, RBW: 1MHz

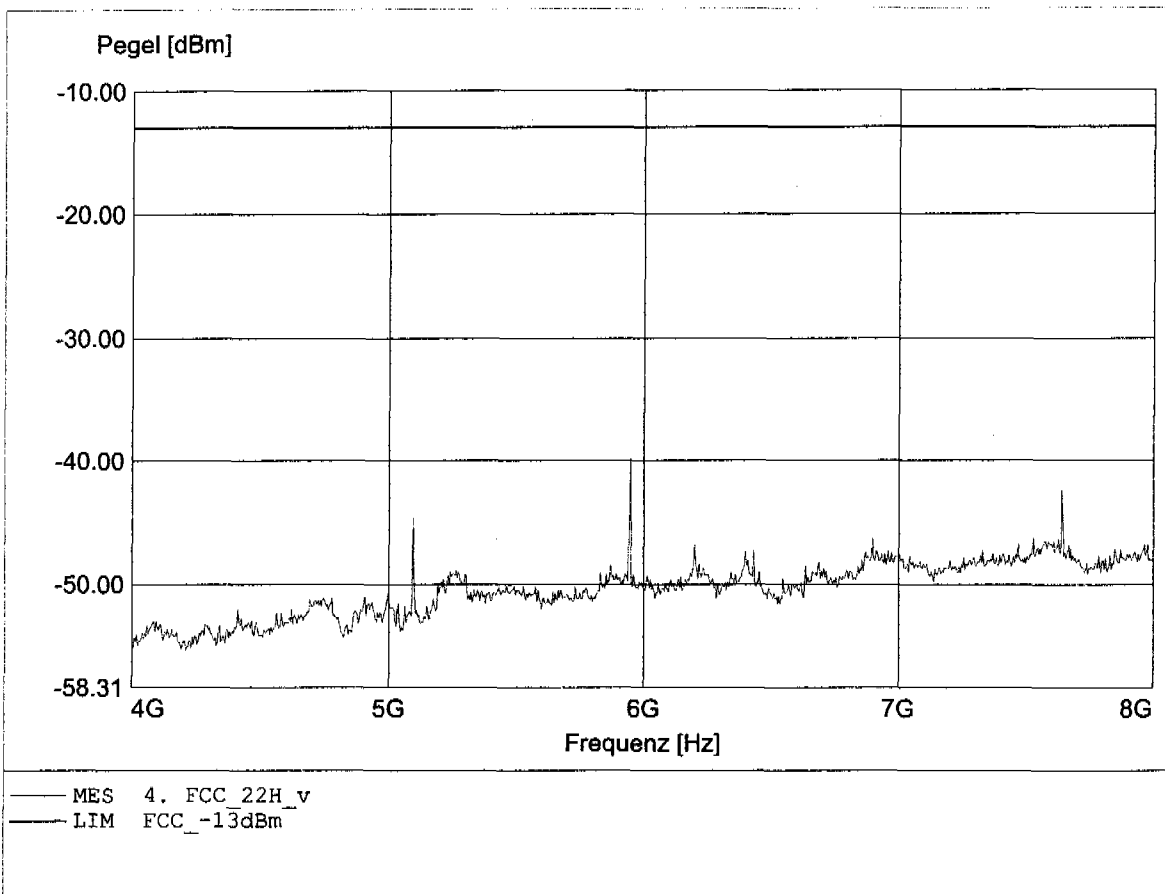


Radiated Emissions Tx
FCC RULES PART 22 SUBPART H

EUT/Model : Dual Band Mobile Handset / EB-G60U
Channel: 251
Approval Holder: Compal Communications Inc.
Test Site / Operator: ETS / Mr. F.Schulz
Temperature/ Voltage: 23°C / Unom. : 3.8 VDC
Test Specification: according to S22.917
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 7.640GHz, Pmax: -37.91dBm, RBW: 1MkHz

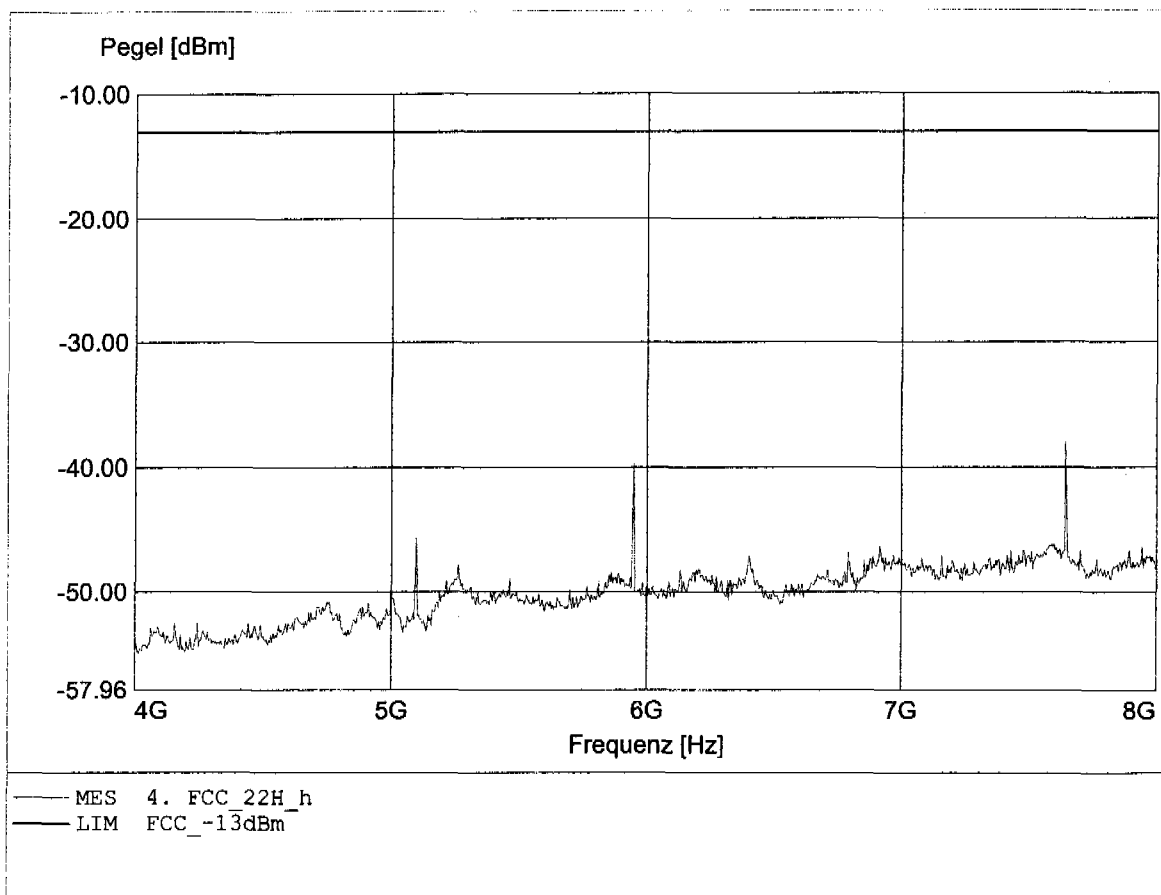


Radiated Emissions Tx
FCC RULES PART 22 SUBPART H

EUT/Model : Dual Band Mobile Handset / EB-G60U
Channel: 251
Approval Holder: Compal Communications Inc.
Test Site / Operator: ETS / Mr. F.Schulz
Temperature/ Voltage: 23°C / Unom. : 3.8 VDC
Test Specification: according to §22.917
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 10.191GHz, Pmax: -37.38dBm, RBW: 1MHz

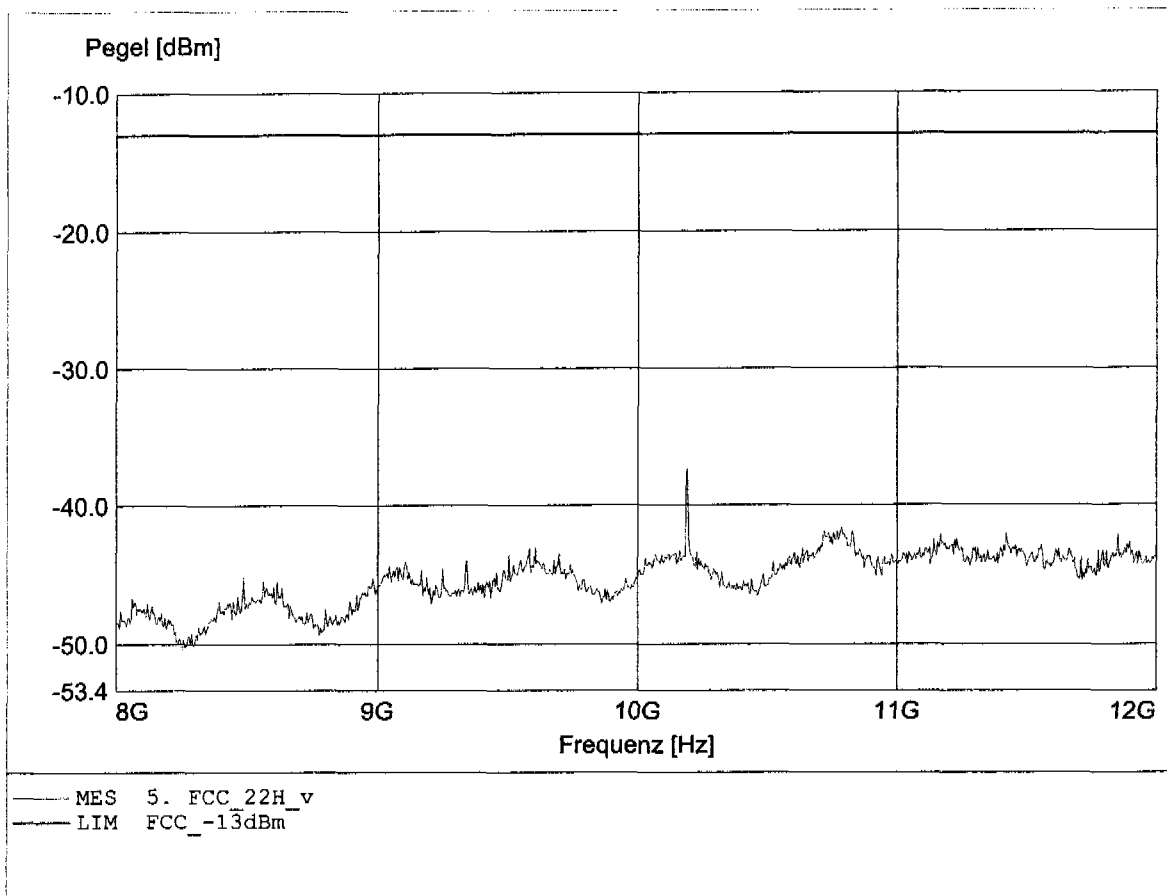

Radiated Emissions Tx
FCC RULES PART 22 SUBPART H

EUT/Model : Dual Band Mobile Handset / EB-G60U
Channel: 251
Approval Holder: Compal Communications Inc.
Test Site / Operator: ETS / Mr. F.Schulz
Temperature/ Voltage: 23°C / Unom. : 3.8 VDC
Test Specification: according to §22.917
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 10.191GHz, Pmax: -40.22dBm, RBW: 1MHz

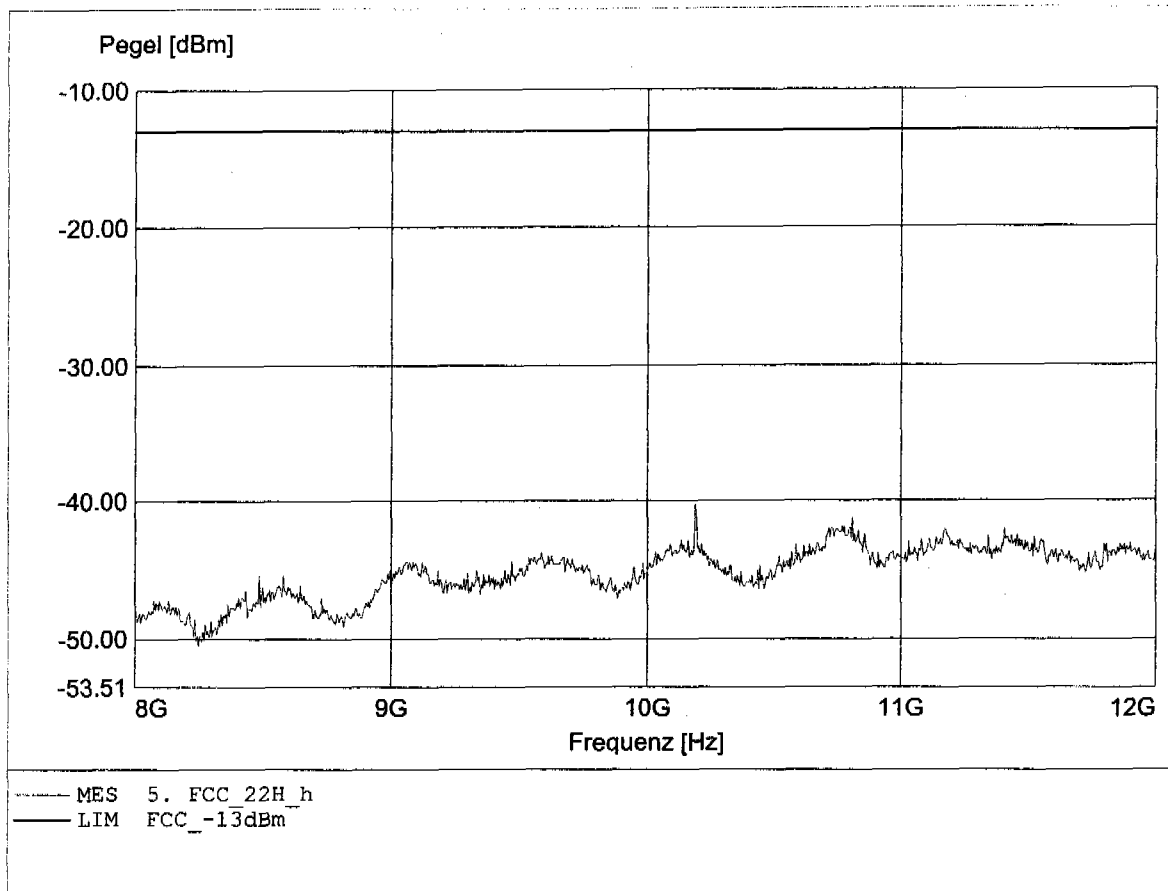


Appendix K

Line Conducted Emissions


EMI voltage test in the ac-mains according to FCC part 15

EUT: GPRS DUAL-BAND (GSM850/PCS1900) HANDSET PHASE II+
Manufacturer: COMPAL COMMUNICATIONS INC.
Operating Condition: Unom: 120V , Tnom: 23°C
Test Site: ETS
Operator: Mr. Marquardt
Test Specification: V-Network: ESH2-Z5
Comment: model: EB-G60U mode: charging

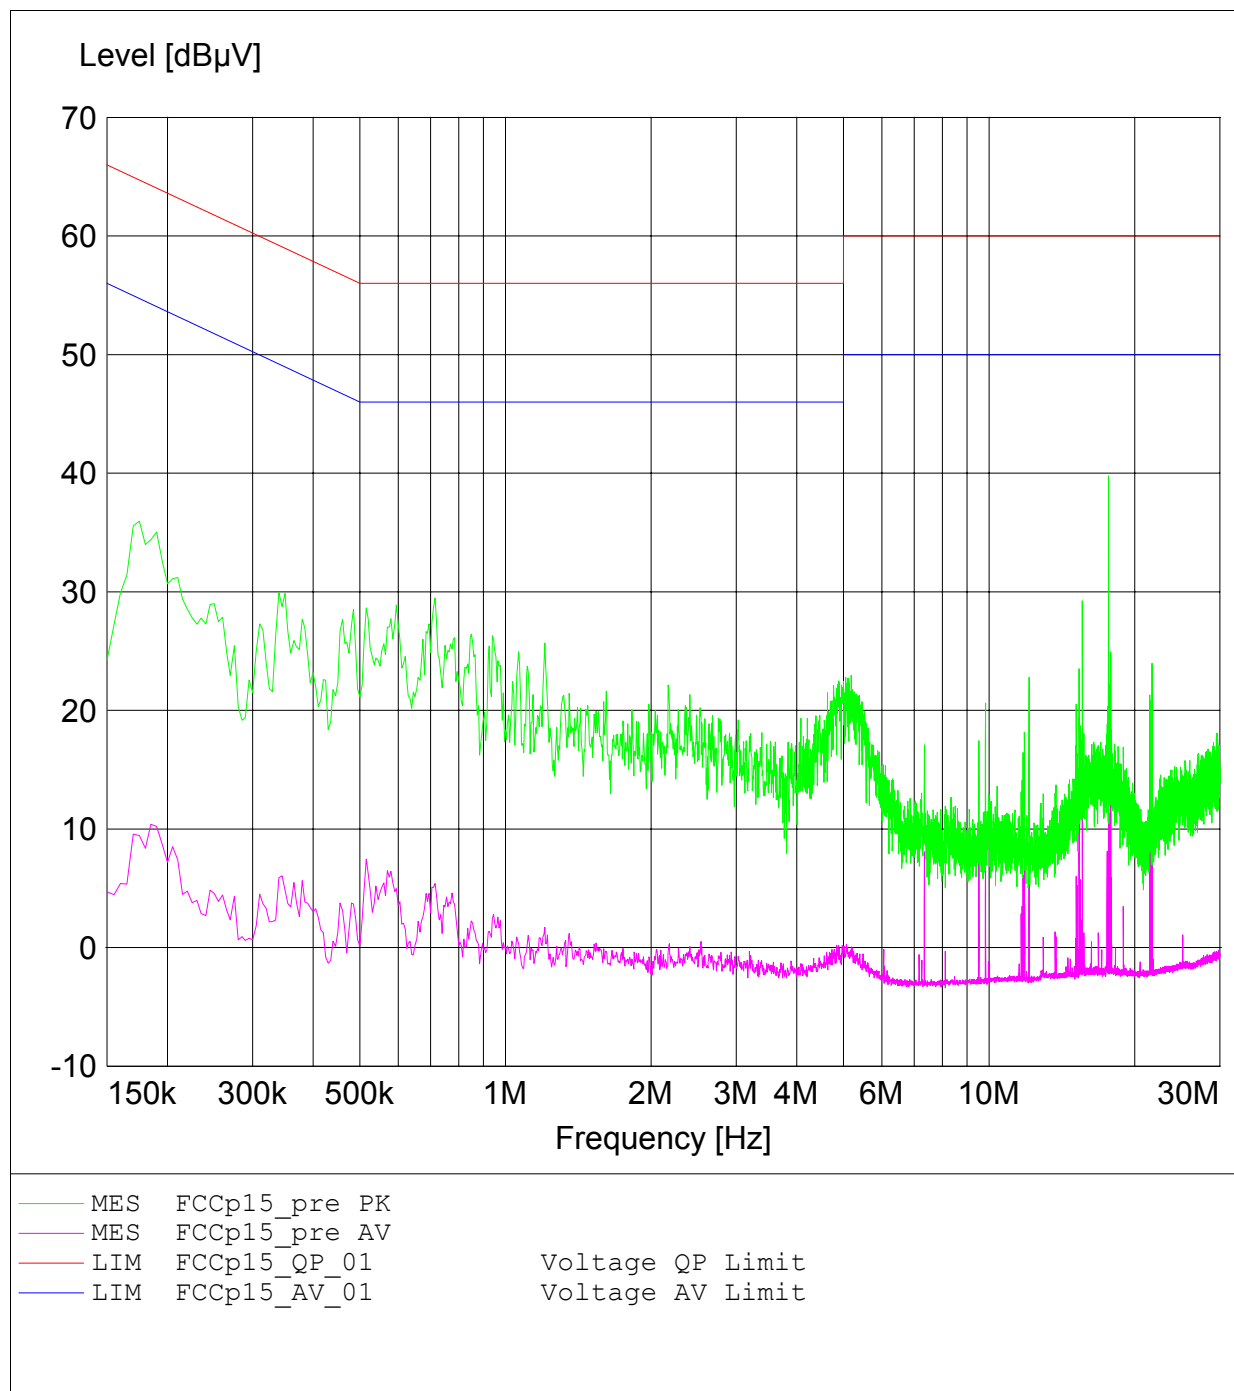

EMI voltage test in the ac-mains according to FCC part 15

EUT: GPRS DUAL-BAND (GSM850/PCS1900) HANDSET PHASE II+
Manufacturer: COMPAL COMMUNICATIONS INC.
Operating Condition: Unom: 120V , Tnom: 23°C
Test Site: ETS
Operator: Mr. Marquardt
Test Specification: V-Network: ESH2-Z5
Comment: model: EB-G60U mode: call + charging

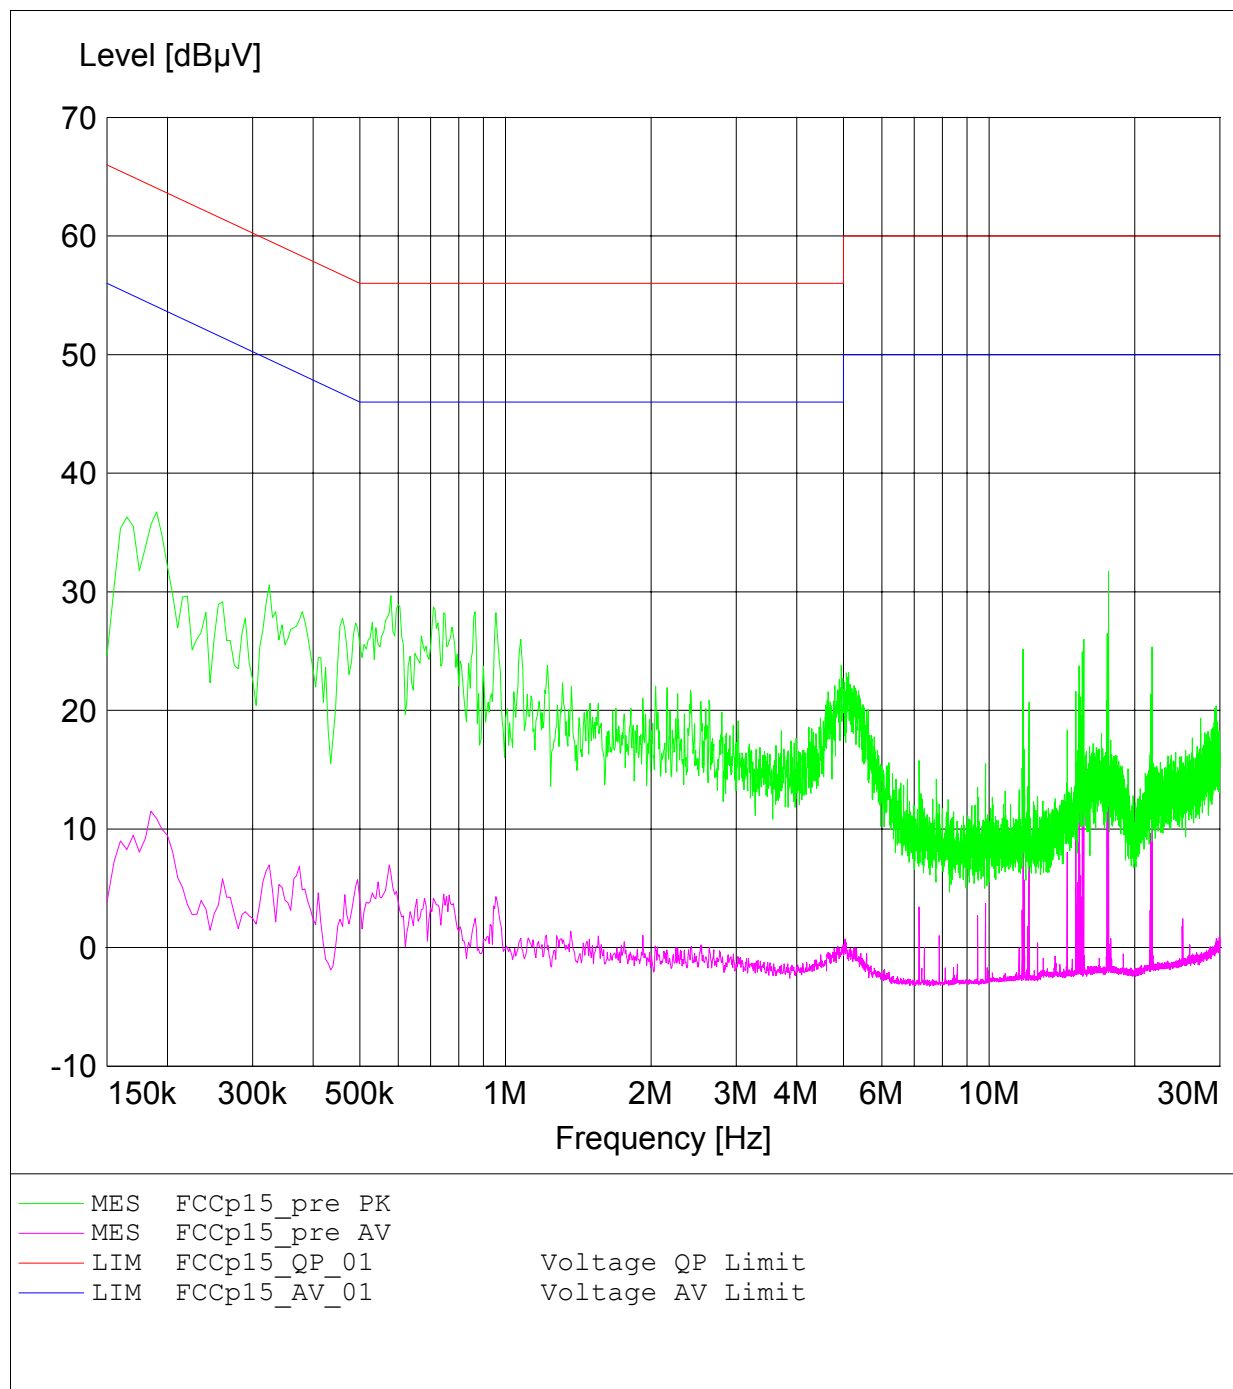

Appendix L

Frequency Stability vs. Temperature

No diagrams

Refer to point 14.2

Appendix M

Frequency Stability vs. Voltage

No diagrams

Refer to point 15.2