

## FCC Part 22/24 Compliance Test Report

|                                                         |                                                                                                                                                                                                                                                      |                                   |                                                                                                               |
|---------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------|---------------------------------------------------------------------------------------------------------------|
| <b>Test Report no.:</b>                                 | Cph_FCC_0701_07.doc                                                                                                                                                                                                                                  | <b>Date of Report:</b>            | 02-01-2007                                                                                                    |
| <b>Number of pages:</b>                                 | 7                                                                                                                                                                                                                                                    | <b>Customer's Contact person:</b> | Daniela Stenhoff                                                                                              |
| <b>Testing laboratory:</b>                              | TCC Nokia Copenhagen Laboratory<br>Frederikskaj<br>1790 COPENHAGEN V<br>DENMARK<br>Tel. +45 33 292929<br>Fax. +45 33 292934                                                                                                                          | <b>Customer:</b>                  | Nokia Corporation<br>Frederikskaj<br>1790 COPENHAGEN V<br>DENMARK<br>Tel. +45 33 292929<br>Fax. +45 33 292934 |
| <b>FCC listing no.:</b>                                 | 99059                                                                                                                                                                                                                                                |                                   |                                                                                                               |
| <b>IC recognition no.:</b>                              | 4820 and 4820-1                                                                                                                                                                                                                                      |                                   |                                                                                                               |
| <b>Tested devices/ accessories:</b>                     | <b>Phone RM-268 (HW: 9000), Battery BP-6M, AC-Charger AC-4E, Headset HS-23</b>                                                                                                                                                                       |                                   |                                                                                                               |
| <b>FCC ID:</b>                                          | QTKRM-268                                                                                                                                                                                                                                            | <b>IC:</b>                        | 661AD-RM268                                                                                                   |
| <b>Supplement reports:</b>                              | -                                                                                                                                                                                                                                                    |                                   |                                                                                                               |
| <b>Testing has been carried out in accordance with:</b> | <b>CFR 47, FCC rules Parts 22 and 24, TIA-603-B-2002 and IC standards RSS-GEN, RSS-132 and RSS-133. Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method and limit".</b> |                                   |                                                                                                               |
| <b>Documentation:</b>                                   | The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory. The documentation of the testing performed on the tested devices is archived for 15 years at TCC Nokia. |                                   |                                                                                                               |
| <b>Test Results:</b>                                    | <b>The EUT complies with the requirements in respect of all parameters subject to the test.</b><br>The test results relate only to devices specified in this document.                                                                               |                                   |                                                                                                               |
| <b>Date and signature for the contents:</b>             |                                                                                                                                                                                                                                                      |                                   |                                                                                                               |

**Jia Dongsheng, Engineer**

## 1. Summary for FCC Part 22/24 Compliance Test Report

|                               |                                                        |
|-------------------------------|--------------------------------------------------------|
| Date of receipt               | 18-12-2006                                             |
| Testing completed             | 02-01-2007                                             |
| The customer's contact person | Daniela Stenhoff                                       |
| Test Plan referred to         | T:\Projects\RM-268\TestPlan_RS\RS_TestPlan_RM-268.xls  |
| Notes                         | None                                                   |
| Document name                 | T:\Projects\RM-268\EMC\Results\FCC\Cph_FCC_0701_07.doc |

### 1.1. EUT and Accessory Information

The EUT is a 3-band (GSM900/1800/1900) mobile phone with GPRS, EGPRS and Bluetooth.  
The EUT is tested with maximum rated TX power, modulated with pseudo random bit sequence (PRBS9).

| Product    | Type   | SN                         | HW   | MV | SW   | DUT   |
|------------|--------|----------------------------|------|----|------|-------|
| Phone      | RM-268 | 353936/01/00001            | 9000 | -  | 3.00 | 27742 |
| Battery    | BP-6M  | 0670506393213M442110100083 | -    | -  | -    | 27743 |
| AC-Charger | AC-4E  | -                          | -    | -  | -    | 27839 |
| Headset    | HS-23  | -                          | -    | -  | -    | 27739 |

### 1.2. Summary of Test Results

#### GSM 1900:

| Section in CFR 47   | Section in RSS-133 | Name of the test                           | Result |
|---------------------|--------------------|--------------------------------------------|--------|
| §2.1046(a)          | 6.2                | Conducted RF output power                  | NP     |
| §24.232(b)          | 6.2                | Radiated RF output power                   | NP     |
| §2.1049(h)          | 5.6                | 99 % occupied bandwidth                    | NP     |
| §24.238(a)          | 6.3                | Band edge compliance                       | NP     |
| §24.238(a), §2.1051 | 6.3                | Spurious emissions at antenna terminals    | NP     |
| §24.238(a), §2.1053 | 6.3                | Spurious radiated emissions                | PASSED |
| §2.1055(a)          | 7                  | Frequency stability, temperature variation | NP     |
| §2.1055(d)          | 7                  | Frequency stability, voltage variation     | NP     |

PASSED  
FAILED  
NP

The EUT complies with the essential requirements in the standard.  
The EUT does not comply with the essential requirements in the standard.  
The test was not performed by the TCC Nokia Copenhagen Laboratory.

## CONTENTS


|                                                                                                                              |          |
|------------------------------------------------------------------------------------------------------------------------------|----------|
| <b>1. Summary for FCC Part 22/24 Compliance Test Report .....</b>                                                            | <b>2</b> |
| 1.1. EUT and Accessory Information .....                                                                                     | 2        |
| 1.2. Summary of Test Results .....                                                                                           | 2        |
| <b>2. Spurious radiated emissions<br/>(FCC §22.917(a), §24.238(a), §2.1053, RSS-GEN 4.7, RSS-132 4.5, RSS-133 6.3) .....</b> | <b>4</b> |
| 2.1. Test setup .....                                                                                                        | 4        |
| 2.2. Test method and limit .....                                                                                             | 4        |
| 2.3. GSM 1900 Test results .....                                                                                             | 5        |
| <b>3. Test Equipment.....</b>                                                                                                | <b>6</b> |
| 3.1. Conducted measurements .....                                                                                            | 6        |
| 3.2. Radiated measurements .....                                                                                             | 6        |

## 2. Spurious radiated emissions

(FCC §22.917(a), §24.238(a), §2.1053, RSS-GEN 4.7, RSS-132 4.5, RSS-133 6.3)

|                                                         |                                                           |
|---------------------------------------------------------|-----------------------------------------------------------|
| <b>EUT with DUT number</b>                              | RM-268 Dut # 27742                                        |
| <b>Accessories with DUT numbers</b>                     | BP-6M Dut # 27743 + HS-23 Dut # 27739 + AC-4E Dut # 27839 |
| <b>Operation Voltage [V] / [Hz]</b>                     | 230V / 50Hz                                               |
| <b>Result</b>                                           | PASSED                                                    |
| <b>Remarks</b>                                          | None                                                      |
| <b>Temp [°C] / Humidity [%RH] / Air Pressure [mBar]</b> | 21.0 / 43.5 / 1008.8                                      |
| <b>Date of measurements</b>                             | 02-01-2007                                                |
| <b>Measured by</b>                                      | Jia Dongsheng                                             |

### 2.1. Test setup

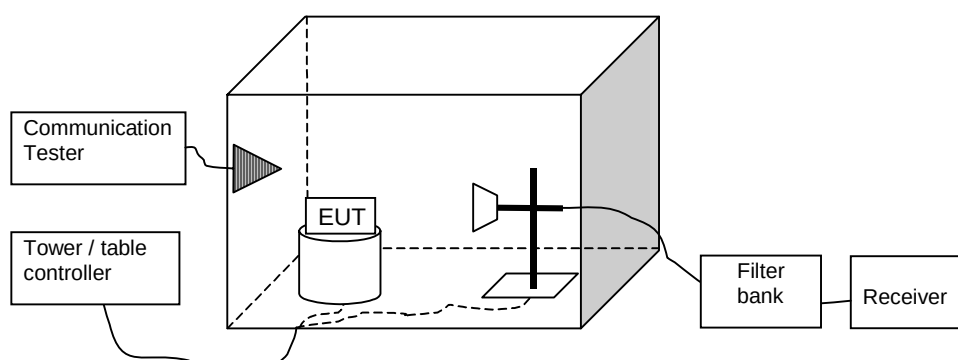

### 2.2. Test method and limit

The measurement is made according to TIA-603-B-2002 as follows:

The measurement is divided into the Preliminary Measurement and the Final Measurement.

The suspected frequencies are searched for in Preliminary Measurement with absorbers on the floor and measuring antenna at fixed height using 2-axis EUT position system.

The Final Measurement is performed in the Semi-Anechoic Chamber with conducting metal floor, if the Preliminary Measurement results are closer than 20 dB to the permissible value.

The EUT is placed at nonconductive plate at the turntable center.

For each suspected frequency, the turntable is rotated 360 degrees and antenna is scanned from 1 to 4 m. This is repeated for both horizontal and vertical receive antenna polarizations.

The emissions less than 20 dB below the permissible value are reported.  
The substitution method is used. Substitution values at each frequencies are measured beforehand and saved to the test software.

The substitution corrections are obtained as described below:

$$A_{SUBST} = P_{SUBST\_TX} - P_{SUBST\_RX} - L_{SUBST\_CABLES} + G_{SUBST\_TX\_ANT}$$

Where  $A_{SUBST}$  is the final substitution correction including receive antenna gain.  $P_{SUBST\_TX}$  is signal generator level,  $P_{SUBST\_RX}$  is receiver level,  $L_{SUBST\_CABLES}$  is cable losses including both TX and RX cables and  $G_{SUBST\_TX\_ANT}$  is substitution antenna gain.

The measurement results are obtained as described below:

$$P [dBm] = P_{MEAS} + A_{TOT}$$

Where  $P_{MEAS}$  is receiver reading in dBm and  $A_{TOT}$  is total correction factor including cable loss, preamplifier gain and substitution correction ( $A_{TOT} = L_{CABLES} - G_{PREAMP} + A_{SUBST}$ ).

Limits for spurious radiated emissions measurements

| Operation band                     | Frequency range [MHz] | Limit [dBm] |
|------------------------------------|-----------------------|-------------|
| GSM 850 / WCDMA 850                | 30 - 8500             | -13         |
| GSM 1900 / WCDMA 1700 / WCDMA 1900 | 30 - 18000            | -13         |

## 2.3. GSM 1900 Test results

EGPRS mode, channel 661 / 1880.0 MHz, slide closed

| Frequency [MHz] | P [dBm] | P [μW]  | P <sub>MEAS</sub> [dBm] | A <sub>TOT</sub> [dB] | Polarisation | Result |
|-----------------|---------|---------|-------------------------|-----------------------|--------------|--------|
| 3760.023046     | -54.10  | 0.00389 | -59.80                  | 5.70                  | VERTICAL     | PASSED |
| 5652.302605     | -55.90  | 0.00257 | -64.90                  | 9.00                  | VERTICAL     | PASSED |
| 7520.034068     | -51.50  | 0.00708 | -67.50                  | 16.00                 | VERTICAL     | PASSED |

EGPRS mode, channel 661 / 1880.0 MHz, slide open

| Frequency [MHz] | P [dBm] | P [μW]  | P <sub>MEAS</sub> [dBm] | A <sub>TOT</sub> [dB] | Polarisation | Result |
|-----------------|---------|---------|-------------------------|-----------------------|--------------|--------|
| 3760.023046     | -52.40  | 0.00575 | -58.10                  | 5.70                  | VERTICAL     | PASSED |
| 5652.302605     | -55.80  | 0.00263 | -64.80                  | 9.00                  | VERTICAL     | PASSED |
| 7520.034068     | -51.00  | 0.00794 | -67.00                  | 16.00                 | VERTICAL     | PASSED |

### 3. Test Equipment

#### 3.1. Conducted measurements

| Eq. No | Equipment                                      | Type      | Manufacturer    | Used in         |
|--------|------------------------------------------------|-----------|-----------------|-----------------|
| 13037  | Power Supply 0-15V 10A                         | EA3012    | LP Instruments  | 15C, 15B        |
| 13513  | Pulse Limiter 9KHz-30MHz                       | ESH3Z2    | Rohde&Schwarz   | 15C, 15B        |
| 13666  | EMI Test Reciever 9KHz-2,5GHz                  | ESPC      | Rohde&Schwarz   | 15C, 15B        |
| 13935  | Two Lines Artificial Mains Network             | ESH3-Z5   | Rohde&Schwarz   | 15C, 15B        |
| 16995  | Directional Coupler 20dB 0,5-2,0 GHz SMA Conn. | 1538RA-20 | Weinschel       | 15C, 15B        |
| 18772  | Shielded Chamber                               | RFD-100   | ETS-Lindgren    | 15C, 15B        |
| 19171  | Universal Radio Communication Tester           | CMU200    | Rohde&Schwarz   | 15C, 15B        |
| 11386  | System DC Power Supply                         | HP6632A   | Hewlett Packard | 22/24, 15C, 15B |
| 19678  | Spectrum Analyzer 26 GHz                       | FSP       | Rohde&Schwarz   | 22/24, 15C, 15B |
| 16601  | Universal Radio Communication Tester           | CMU200    | Rohde&Schwarz   | 22/24, 15C, 15B |
| 19625  | Vötsch Climatic Chamber                        | VT4002EMC | Vötsch          | 22/24, 15C, 15B |
| 13357  | Rohde & Schwartz Signal Generator              | SMP02     | Rohde&Schwarz   | 22/24, 15C, 15B |

#### 3.2. Radiated measurements

| Eq. No | Equipment                                      | Type          | Manufacturer  | Used in         |
|--------|------------------------------------------------|---------------|---------------|-----------------|
| 18416  | Universal Radio Communication Tester           | CMU200        | Rohde&Schwarz | 22/24, 15C, 15B |
|        | Programmable Relay Switching System            | -----         | Pickering     | 22/24, 15C, 15B |
| 15742  | Programmable Relay Switching System            | -----         | Pickering     | 22/24, 15C, 15B |
| 14020  | Power Supply Module Relay Switching System 45W | 10-910-002    | Pickering     | 22/24, 15C, 15B |
| 15743  | Power Supply Module Relay Switching System 50W | 10-910L-001   | Pickering     | 22/24, 15C, 15B |
| 16490  | RS-232/IEEE-488.2 Interface                    | 10-921-001    | Pickering     | 22/24, 15C, 15B |
|        | RS-232/IEEE-488.2 Interface                    | 10-921-001    | Pickering     | 22/24, 15C, 15B |
| 20078  | Relay 2x6 Chnl $\mu$ Wave Mux                  | 10-785B-522   | Pickering     | 22/24, 15C, 15B |
| 14021  | Relay Dual 6 Chnl $\mu$ Wave Mux               | 10-785-522    |               | 22/24, 15C, 15B |
|        | Relay Dual 6 Chnl $\mu$ Wave Mux               | 10-785-522    |               | 22/24, 15C, 15B |
| 17644  | Dual 6 Channel MUX Microwave Relay SMA 50 Ohm  | 10-785-522    | Pickering     | 22/24, 15C, 15B |
| 16948  | Dual 6 Channel MUX Microwave Relay SMA 50 Ohm  | 10-785-522    | Pickering     | 22/24, 15C, 15B |
| 16949  | Dual 6 Channel MUX Microwave Relay SMA 50 Ohm  | 10-785-522    | Pickering     | 22/24, 15C, 15B |
| 18792  | Multi Device Controller                        | 2090          | ETS-EMCO      | 22/24, 15C, 15B |
| 14963  | RF Preampifier 100MHz-4GHz (Metal Chassis)     | AFS3-00100400 | Miteq/NMP Cph | 22/24, 15C, 15B |
| 18861  | EMI Test Receiver 20Hz-26,5GHz                 | ESI           | Rohde&Schwarz | 22/24, 15C, 15B |

| Eq. No | Equipment                                      | Type                                    | Manufacturer              | Used in         |
|--------|------------------------------------------------|-----------------------------------------|---------------------------|-----------------|
| 18860  | Ultra Broadband Antenna<br>Ultralog 30-3000MHz | HL562                                   | Rohde&Schwarz             | 22/24, 15C, 15B |
| 19830  | Ultra Broadband Antenna<br>Ultralog 30-3000MHz | HL562                                   | Rohde&Schwarz             | 22/24, 15C, 15B |
| 18773  | Shielded Chamber                               | RFD-100                                 | ETS-Lindgren              | 22/24, 15C, 15B |
| 18774  | Shielded Chamber                               | RFSD-F/A-100                            | ETS-Lindgren              | 22/24, 15C, 15B |
| 19151  | High Pass Filter 3GHz<br>WHK3.0/18G-10ss       | WHJS3000-10SS                           | Wainwright                | 22/24, 15C, 15B |
| 13937  | Ultra Stable Notch Filter 850MHz               | WRCA902.4-0.2/40-6SS                    | Wainwright<br>Instruments | 22/24, 15C, 15B |
| 13936  | Ultra Stable Notch Filter<br>1747,5MHz         | WRCD1747.5-0.2/40-<br>10SS              | Wainwright<br>Instruments | 22/24, 15C, 15B |
| 13917  | Highpass Filter 1000-3000MHz<br>50OHM SMA Conn | WHKS1000-10SS                           | Wainwright<br>Instruments | 22/24, 15C, 15B |
| 14188  | Ultra Stable Notch Filter<br>902,4MHz          | WRCA902.4-0.2/40-6SS                    | Wainwright                | 22/24, 15C, 15B |
| 14187  | Ultra Stable Notch Filter<br>1747,5MHz         | WRCD1747.5-0.2/40-<br>10SS              | Wainwright                | 22/24, 15C, 15B |
| 16633  | Ultra Stable Notch Filter<br>1880,0MHz         | WRCD1880.0-0.2/40-<br>10SS              | Wainwright                | 22/24, 15C, 15B |
| 19587  | BT/WLAN Band Reject Filter                     | WRCG2400/2483-<br>2390/2493-35/10SS     | Wainwright                | 22/24, 15C, 15B |
|        | WDCMA Band 4 filter                            | WRCG1737/1743-<br>1733/1747-40/6SS      | Wainwright                | 22/24, 15C, 15B |
|        | WDCMA Band 5&6 filter                          | WRCG832/83/-825/845-<br>40/5SS          | Wainwright                | 22/24, 15C, 15B |
|        | WDCMA Band 8 filter                            | WRCG894.6/900.6-<br>890.6/904.6-40/80SS | Wainwright                | 22/24, 15C, 15B |
| 18323  | Band reject filter 1947-1953MHz<br>40dB        | WRCG1947/1953-<br>1940/1960-40/6SS      | Wainwright                | 22/24, 15C, 15B |
| 20031  | Double Ridged Broadband Horn                   | BBHA 9120 D                             | SCHWARZBECK               | 22/24, 15C, 15B |
| 15190  | Infra Red Remote Control Unit                  | 4630                                    | Emco                      | 22/24, 15C, 15B |
| 14993  | EMI Test Receiver 9KHz-<br>2750MHz             | ESCS30                                  | Rohde&Schwarz             | 22/24, 15C, 15B |
| 15191  | Turntable Contoller Unit                       | G-800SDX                                | YAESU                     | 22/24, 15C, 15B |
| 14900  | Antenna Controller                             | HD100                                   | HD GmbH                   | 22/24, 15C, 15B |
| 15105  | Attenuator 30dB DC-1000MHz<br>50 Ohm Nf - Nm   | NAT-30                                  | Mini-Circuits             | 22/24, 15C, 15B |
| 13302  | Spectrum Analyzer 9KHz-<br>12.8GHz             | HP8596E                                 | Hewlett Packard           | 22/24, 15C, 15B |
| 11584  | Spectrum analyzer 50Hz-<br>6,5GHz              | HP8561B                                 | Hewlett Packard           | 22/24, 15C, 15B |
| 13134  | Tracking generator                             | HP85645A                                | Hewlett Packard           | 22/24, 15C, 15B |
| 19374  | Resonant Dipole Antenna<br>850MHz SMA m Conn.  | -----                                   | NMP Cph                   | 22/24, 15C, 15B |
| 19375  | Resonant Dipole Antenna<br>1900MHz SMA m Conn. | -----                                   | NMP Cph                   | 22/24, 15C, 15B |
| 11487  | Network analyzer 300KHz-<br>3,0GHz             | HP8753A                                 | Hewlett Packard           | 22/24, 15C, 15B |
| 14807  | S - Parameter Test Set 300KHz-<br>6GHz         | HP85047A                                | Hewlett Packard           | 22/24, 15C, 15B |
| 17277  | Multimeter Digital 6 1/2 Digit                 | AT34401A                                | Agilent Technologies      | 22/24, 15C, 15B |