

FCC Part 15C Compliance Test Report

Test Report no.:	FCC15C_RM-608_08.docx	Date of Report:	03-Aug-2010
Number of pages:	9	Customer's Contact person:	Hu Dongji
Testing laboratory:	TCC Nokia Beijing Laboratory Beijing Economic and Technological Development Area No.5 Donghuan Zhonglu Beijing PRC China 100176 Tel. +86 10 8711 8888 Fax. +86 10 8711 4550	Customer:	Nokia Corporation Beijing Economic and Technological Development Area No.5 Donghuan Zhonglu Beijing PRC China 100176 Tel. +86 10 8711 8888 Fax. +86 10 8711 4550
FCC listing no.:	975940		
IC recognition no.:	661AH-1		
Tested devices/ accessories:	Phone RM-608 / Battery BL-5CB		
FCC ID:	QTLRM-608	IC:	661AB-RM608
Supplement reports:	-		
Testing has been carried out in accordance with:	CFR 47, FCC rules Part 15 Subpart C, ANSI C63.4 (2003), Public Notice DA 00-705, DTS procedures KDB 558074, IC standards. Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method and limit".		
Documentation:	The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory. The documentation of the testing performed on the tested devices is archived for 15 years at TCC Nokia.		
Test Results:	The EUT complies with the requirements in respect of all parameters subject to the test. The test results relate only to devices specified in this document		
Date and signature for the contents:			

Jia Dongsheng, System Manager

1. Summary for FCC Part 15C Compliance Test Report

Date of receipt	25-Jul-2010
Testing completed	03-Aug-2010
The customer's contact person	Hu Dongji
Test Plan referred to	T:\Projects\RM-608\TestPlan\RS_testplan_RM-608_BT_tests.xls
Notes	-
Document name	FCC15C_RM-608_08.docx

1.1. EUT and Accessory Information

The EUT is a 2-band (GSM850/1900) mobile phone with GPRS and Bluetooth. Bluetooth and WLAN are tested with maximum rated TX power.

Product	Type	SN	HW	MV	SW	DUT
Phone	RM-608	001004003990968	0302	-	arc101_10w27_1	51789
Battery	BL-5CB	0670619382066Q531070419113	-	-	-	51782

1.2. Summary of Test Results

Bluetooth:

Section in CFR 47	Section in RSS-GEN or RSS-210	Name of the test	Result
15.247(b)(1)	A8.4 (2)	Conducted peak output power	NP
15.247(d)	A8.5	Band edge compliance of RF emissions	PASSED
15.247(d)	A8.5	Spurious RF conducted emissions	NP
15.247(d), 15.209	A8.5	Spurious radiated emissions	NP
15.207	7.2.2	AC powerline conducted emissions	NP
15.247(a)(1)	A8.1 (a)	20 dB bandwidth	NP
15.247(a)(1)	A8.1 (b)	Carrier frequency separation	NP
15.247(a)(1)(iii)	A8.1 (d)	Number of hopping frequencies	NP
15.247(a)(1)(iii)	A8.1 (d)	Time of occupancy	NP

PASSED

FAILED

NP

The EUT complies with the essential requirements in the standard.

The EUT does not comply with the essential requirements in the standard.

The test was not performed by the TCC Nokia Laboratory.


CONTENTS

1. Summary for FCC Part 15C Compliance Test Report	2
1.1. EUT and Accessory Information	2
1.2. Summary of Test Results	2
2. Band edge compliance of RF emissions (FCC §15.247(d), RSS-210 A8.5)	4
2.1. Test Setup.....	4
2.2. Test method and limit	4
2.3. Bluetooth Test results.....	5
3. Test Equipment	9
3.1. Conducted measurements	9
3.2. Radiated measurements	9

2. Band edge compliance of RF emissions (FCC §15.247(d), RSS-210 A8.5)

EUT with DUT number	RM-608, DUT 51789
Accessories with DUT numbers	BL-5CB, DUT 51782
Operation Voltage [V] / [Hz]	Nominal
Results	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	22 / 62 / 99.8
Date of measurements	03-Aug-2010
Measured by	Jia Dongsheng

2.1. Test Setup

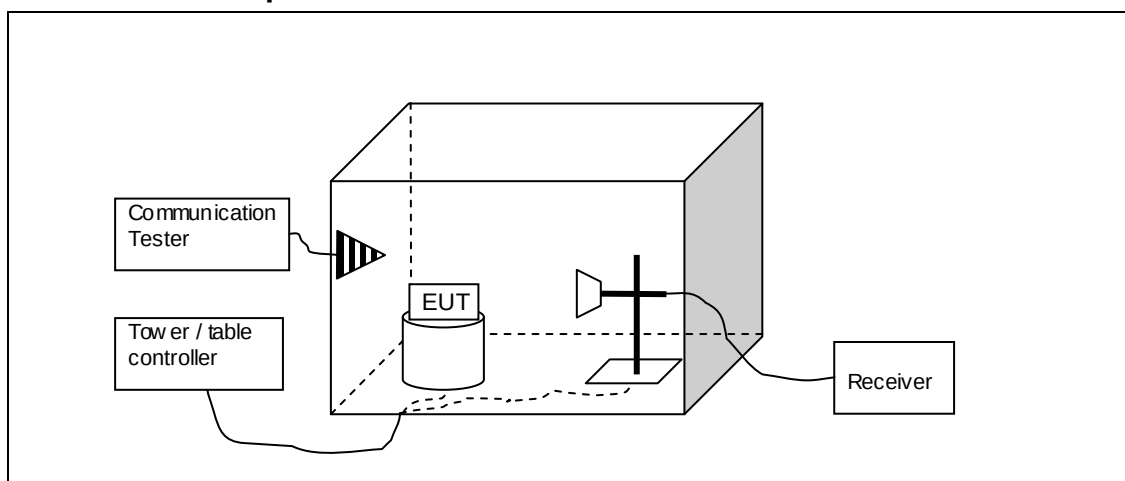

2.2. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.

The measurement results are obtained as described below:

$$E [\mu V/m] = U_{RX} + A_{TOT}$$

Where U_{RX} is receiver reading and A_{TOT} is total correction factor including cable loss, antenna factor and preamplifier gain ($A_{TOT} = L_{CABLES} + A_F - G_{PREAMP}$).

Limits for band edge compliance of RF emissions measurements (3 m measurement distance)

Frequency range [MHz]	Limit Average [dBμV/m]	Limit Peak [dBμV/m]
Below 2390 and above 2483.5	<=54	<=74

2.3. Bluetooth Test results

2.3.1 GFSK modulation, PRBS packet type


Average (RBW: 1 MHz, VBW: 1 MHz)

Channel / f_c [MHz]	E [dB μ V/m]	E [μ V/m]	U_{RX} [dB μ V]	A_{TOT} [dB]	Result
0 / 2402	48.71	272.511	46.86	1.85	PASSED
Hopping on, low end	50.17	322.437	48.32	1.85	PASSED
78 / 2480	52.66	429.348	50.15	2.51	PASSED
Hopping on, high end	53.2	457.048	50.69	2.51	PASSED


Peak (RBW: 1 MHz, VBW: 1 MHz)

Channel / f_c [MHz]	E [dB μ V/m]	E [μ V/m]	U_{RX} [dB μ V]	A_{TOT} [dB]	Result
0 / 2402	60.56	1066.883	58.71	1.85	PASSED
Hopping on, low end	60.38	1044.531	58.53	1.85	PASSED
78 / 2480	62.14	1278.648	59.63	2.51	PASSED
Hopping on, high end	61.79	1229.111	59.28	2.51	PASSED


GFSK mode. Channel 0 / 2402 MHz

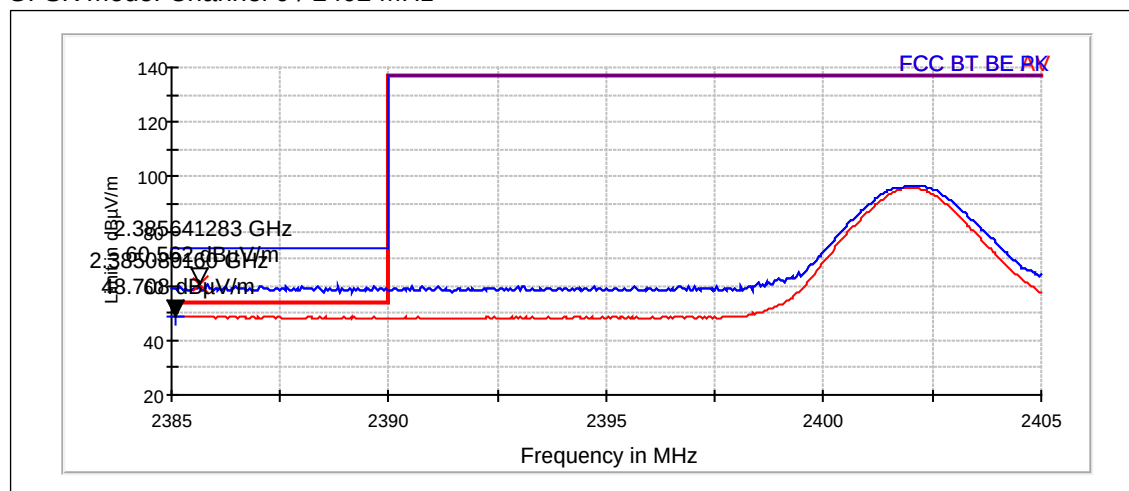


GFSK mode. Hopping on, low end

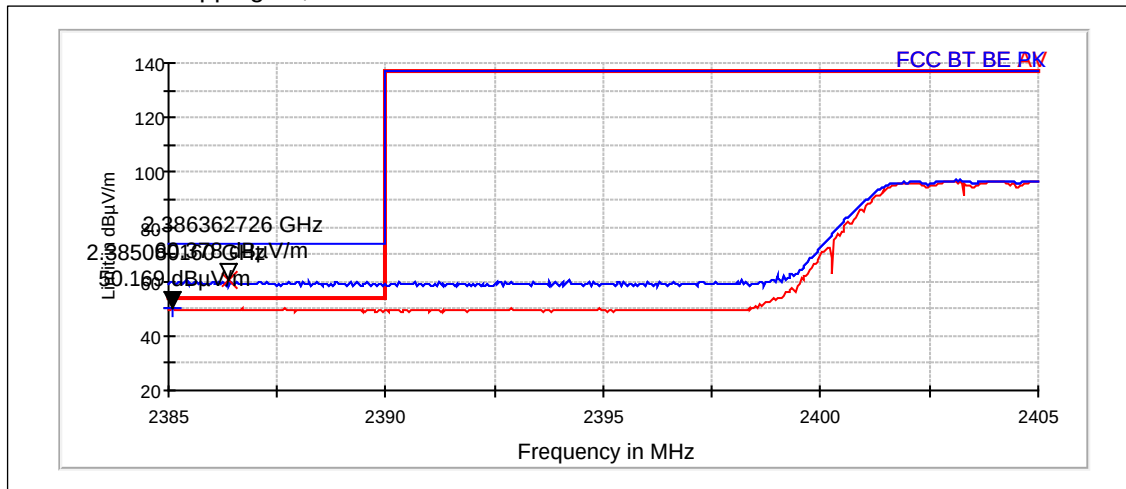

GFSK mode. Channel 78 / 2480 MHz

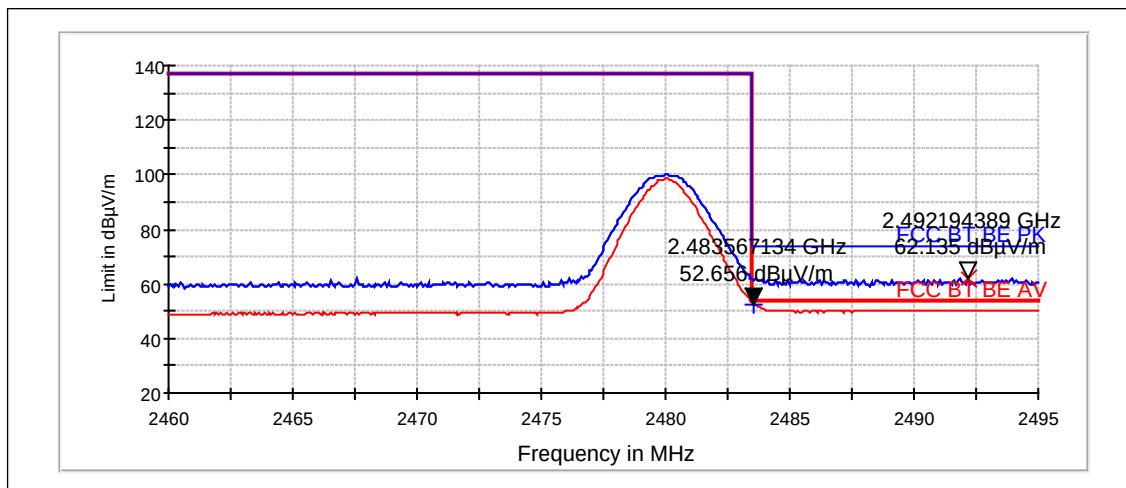

GFSK mode. Hopping on, high end

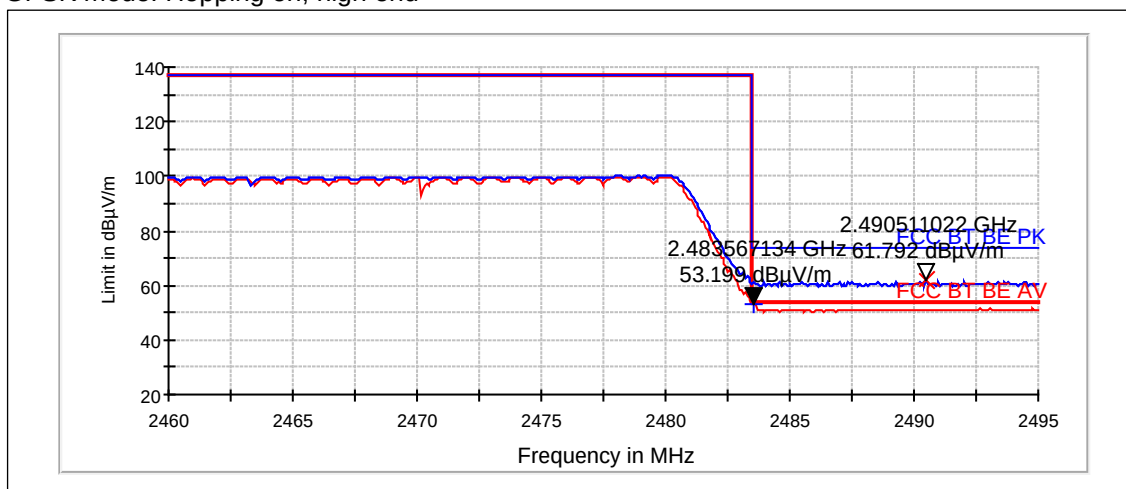

2.3.2 8DPSK modulation, PRBS packet type


Average (RBW: 1 MHz, VBW: 1 MHz)

Channel / f _c [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Result
0 / 2402	48.74	273.392	46.89	1.85	PASSED
Hopping on, low end	50.65	340.761	48.8	1.85	PASSED
78 / 2480	52.03	399.34	49.52	2.51	PASSED
Hopping on, high end	51.93	394.724	49.42	2.51	PASSED


Peak (RBW: 1 MHz, VBW: 1 MHz)

Channel / f _c [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Result
0 / 2402	61	1121.991	59.15	1.85	PASSED
Hopping on, low end	60.18	1021.468	58.33	1.85	PASSED
78 / 2480	62.12	1277.144	59.61	2.51	PASSED
Hopping on, high end	62.08	1270.862	59.57	2.51	PASSED


8DPSK mode. Channel 0 / 2402 MHz

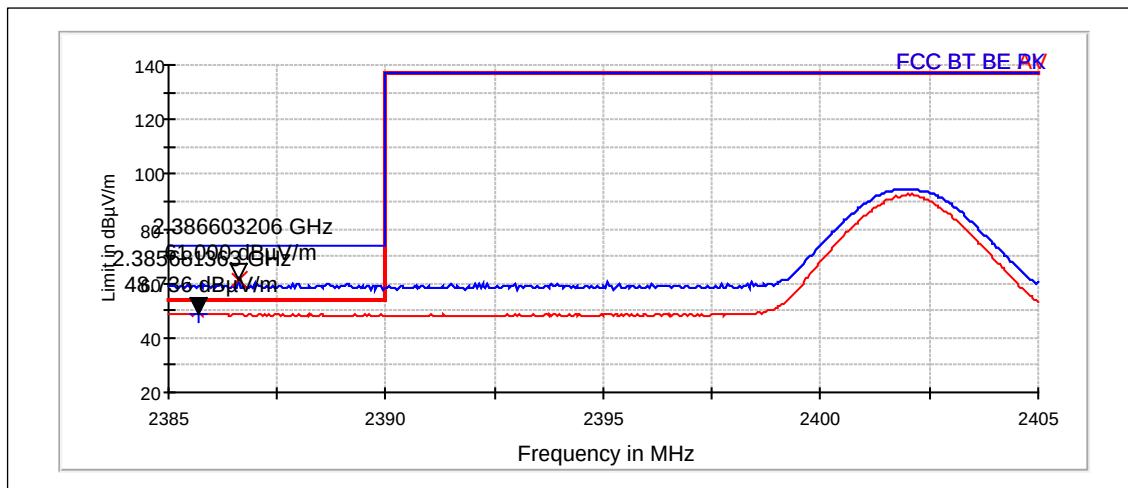


8DPSK mode. Hopping on, low end

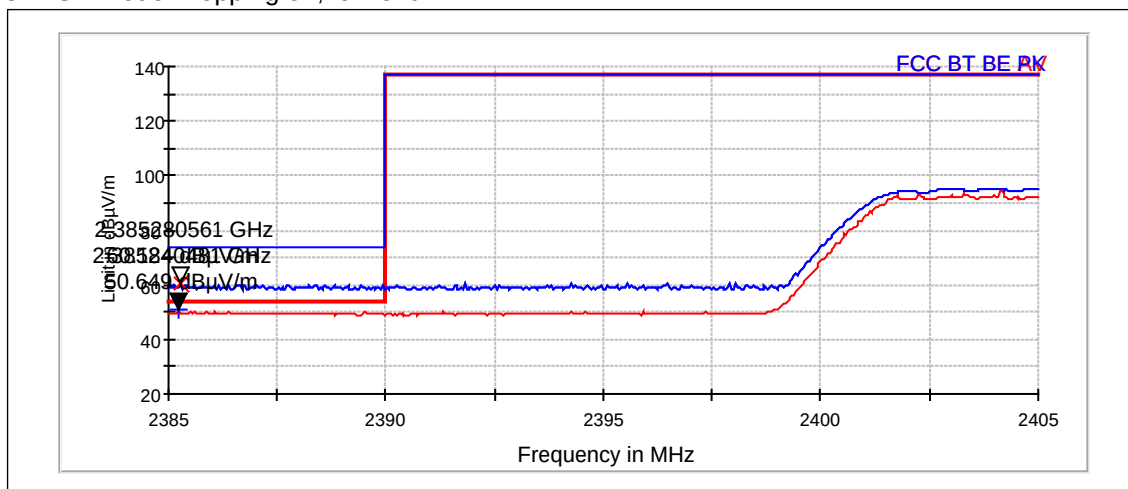

8DPSK mode. Channel 78 / 2480 MHz

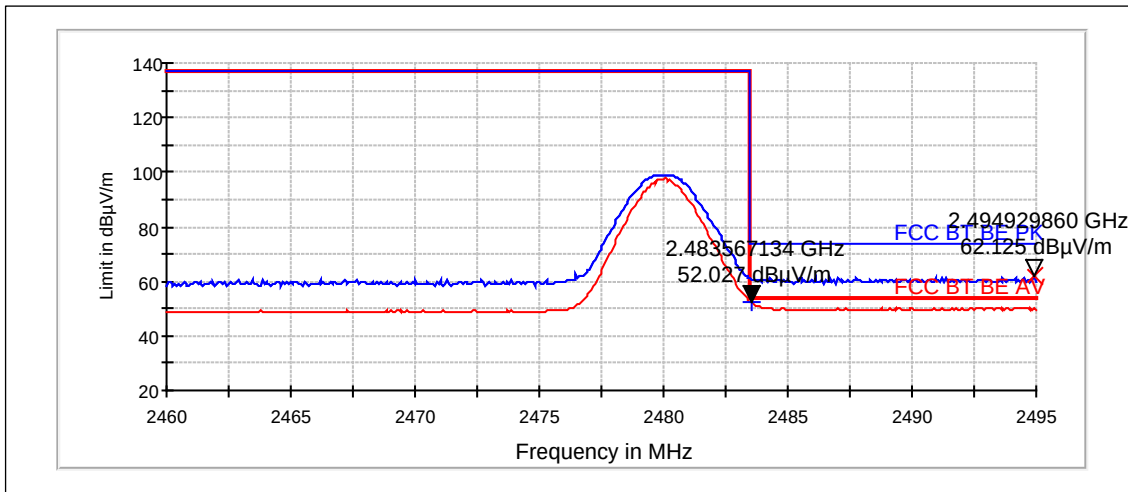

8DPSK mode. Hopping on, high end

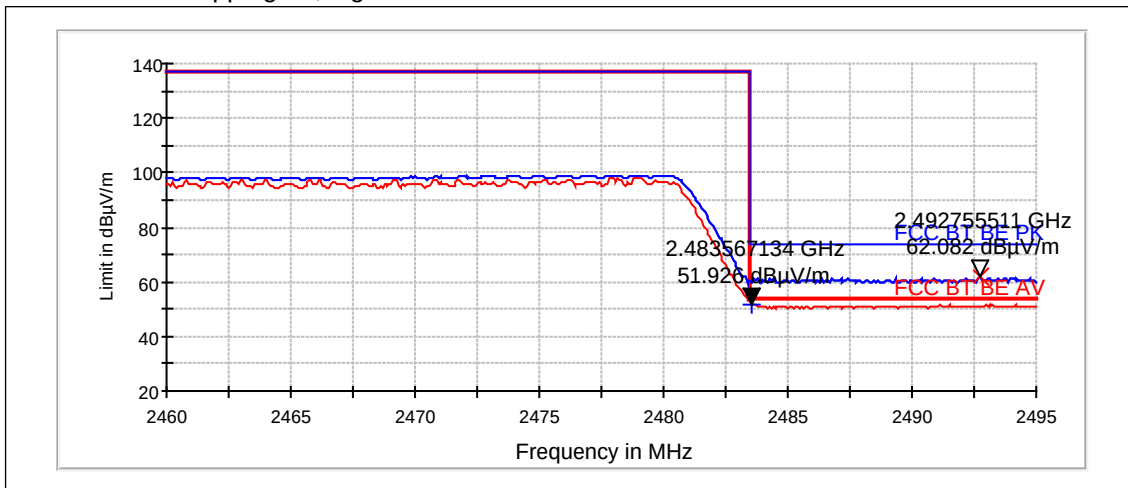

3. Test Equipment

3.1. Conducted measurements

Eq. No	Equipment	Type	Manufacturer	Used in
-	RF Emission Software	EMC32 Test Software	R&S	22/24/27, 15C, 15B
BJPCHW0020	DC Power supply	Hp6632B	HP	22/24/27, 15C
BJPCPT0040	Receiver	ESCS30	R&S	15C,15B
BJPCPT0073	Signal Generator	SMR 20	R&S	22/24/27, 15C, 15B
BJPCPT0079	LISN 50 µH	ESH3-Z5	R&S	15C,15B
BJPCPT0131	Communication Tester	CMU200	R&S	15C,15B
BJPCPT0191	Pulse Limiter	ESH3-Z2	R&S	15C,15B
BJPCTC0017	Communication Tester	CMU200	R&S	22/24/27, 15C, 15B
BJPCTC0067	Bluetooth Tester	CBT	R&S	22/24/27, 15C
BJPCTC0089	Temperature Test chamber	VT4002	Votsch industrietechnik	22/24/27, 15C
BJPCTC0090	FSP spectrum analyzer	FSP30	R&S	22/24/27, 15C
BJPCTC0094	GPIO-RS232 convertor	GPIO-RS232	NI	22/24/27, 15C
BJPCTC0112	Power Splitter	11667B	Agilent	22/24/27, 15C
BJPCTC0114	Signal Generator	E8357C	Agilent	22/24/27, 15C
BJPCTC0115	Communication Tester	CMU200	R&S	22/24/27, 15B, 15C

3.2. Radiated measurements

Eq. No	Equipment	Type	Manufacturer	Used in
-	BT / WLAN Antenna	SPA 2400/75/9/0/V	Huber-Suhner	15C, 15B
-	BT / WLAN Antenna	SPA 2400/75/9/0/V	Huber-Suhner	15C, 15B
-	RF Emission Software	EMC32 Test Software	R&S	22/24/27, 15C, 15B
BJPCPT0072	Receiver	ESI B26	R&S	22/24/27, 15C, 15B
BJPCPT0130	Relay Switch Unit	TS-RSP	R&S	22/24/27, 15C, 15B
BJPCPT0150	High Pass Filter	WHKS1200-10SS	Wainwright	22/24/27, 15C, 15B
BJPCPT0151	Band Reject Filter	WRCD1880/2000-0.2/40-5SSK	Wainwright	24, 15B
BJPCPT0154	Band Reject Filter	WRCT2402/2480-2400/2483.5-30-20SS	Wainwright	15C, 15B
BJPCPT0162	Antenna	HF906	R&S	22/24/27, 15C, 15B
BJPCTC0007	Antenna	HL562	R&S	22/24/27, 15C, 15B
BJPCTC0029	Antenna	HF906	R&S	22/24/27, 15C, 15B
BJPCTC0034	Band Reject Filter	WRCT 800/880-0.2/40-5SSK	Wainwright	22, 15B
BJPCTC0049	Preamplifier	Blma 0118-1A-Bt	Bonn	22/24/27, 15C, 15B
BJPCTC0055	Communication Tester	CMU200	R&S	22/24/27, 15C, 15B
BJPCTC0058	Bluetooth Tester	CBT	R&S	15C, 15B
BJPCTC0064	Band Reject Filter	WRCG1877/1883-1870/1890-40/6SS	Wainwright	24, 15B
BJPCTC0065	Band Reject Filter	WRCG832/838-825/845-40/5SS	Wainwright	27, 15B
BJPCTC0071	Multi-Device Controller	2090	EMCO	22/24/27, 15C, 15B
BJPCTC0072	Anechoic Chamber	3 m Semi / Full Anechoic Chamber	ETS	22/24/27, 15C, 15B
BJPCTC0073	MAST	Model-TR/POL	ETS	22/24/27, 15C, 15B
BJPCTC0074	MAST	Model 2070-2	ETS	22/24/27, 15C, 15B
BJPCTC0075	Turntable	Model 2188	ETS-EMCO	22/24/27, 15C, 15B
BJPCTC0096	Preamplifier	AFS4-00100300-20-23P-6	Miteq	22/24/27, 15C, 15B
BJPCTC0113	Receiver	ESI B26	R&S	22/24/27, 15B, 15C
BJPCTC0115	Communication Tester	CMU200	R&S	22/24/27, 15B, 15C