



**Average Power_Non-Beamforming_
Radio 1_Scan_Indoor**

Appendix C.1

Summary

Mode	Total Power (dBm)	Total Power (W)
5.15-5.25GHz	-	-
a20_Nss1,(6Mbps)_1TX	17.60	0.05754
a40_Nss1,(6Mbps)_1TX	15.69	0.03707
a80_Nss1,(6Mbps)_1TX	12.22	0.01667
a160_Nss1,(6Mbps)_1TX	8.56	0.00718
5.25-5.35GHz	-	-
a20_Nss1,(6Mbps)_1TX	17.91	0.06180
a40_Nss1,(6Mbps)_1TX	15.27	0.03365
a80_Nss1,(6Mbps)_1TX	12.07	0.01611
a160_Nss1,(6Mbps)_1TX	7.89	0.00615
5.47-5.725GHz	-	-
a20_Nss1,(6Mbps)_1TX	17.76	0.05970
a40_Nss1,(6Mbps)_1TX	16.17	0.04140
a80_Nss1,(6Mbps)_1TX	17.87	0.06124
a160_Nss1,(6Mbps)_1TX	10.69	0.01172
5.725-5.85GHz	-	-
a20_Nss1,(6Mbps)_1TX	18.05	0.06383
a40_Nss1,(6Mbps)_1TX	17.77	0.05984
a80_Nss1,(6Mbps)_1TX	16.95	0.04955



Average Power_Non-Beamforming_ Radio 1_Scan_Indoor

Appendix C.1

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Total Power (dBm)	Power Limit (dBm)
a20_Nss1,(6Mbps)_1TX	-	-	-	-	-
5180MHz	Pass	2.89	14.95	14.95	30.00
5200MHz	Pass	2.89	17.60	17.60	30.00
5240MHz	Pass	2.89	17.57	17.57	30.00
5260MHz	Pass	3.35	17.73	17.73	23.98
5300MHz	Pass	3.35	17.91	17.91	23.98
5320MHz	Pass	3.35	14.43	14.43	23.98
5500MHz	Pass	4.93	15.65	15.65	23.98
5580MHz	Pass	4.93	17.76	17.76	23.98
5700MHz	Pass	4.93	15.01	15.01	23.98
5720MHz Straddle 5.47-5.725GHz	Pass	4.93	17.51	17.51	23.98
5720MHz Straddle 5.725-5.85GHz	Pass	3.56	11.58	11.58	30.00
5745MHz	Pass	3.56	18.04	18.04	30.00
5785MHz	Pass	3.56	18.01	18.01	30.00
5825MHz	Pass	3.56	18.05	18.05	30.00
a40_Nss1,(6Mbps)_1TX	-	-	-	-	-
5190MHz	Pass	2.89	11.29	11.29	30.00
5230MHz	Pass	2.89	15.69	15.69	30.00
5270MHz	Pass	3.35	15.27	15.27	23.98
5310MHz	Pass	3.35	11.28	11.28	23.98
5510MHz	Pass	4.93	10.71	10.71	23.98
5550MHz	Pass	4.93	15.84	15.84	23.98
5670MHz	Pass	4.93	13.89	13.89	23.98
5710MHz Straddle 5.47-5.725GHz	Pass	4.93	16.17	16.17	23.98
5710MHz Straddle 5.725-5.85GHz	Pass	3.56	6.52	6.52	30.00
5755MHz	Pass	3.56	17.77	17.77	30.00
5795MHz	Pass	3.56	17.64	17.64	30.00
a80_Nss1,(6Mbps)_1TX	-	-	-	-	-
5210MHz	Pass	2.89	12.22	12.22	30.00
5290MHz	Pass	3.35	12.07	12.07	23.98
5530MHz	Pass	4.93	11.51	11.51	23.98
5610MHz	Pass	4.93	15.69	15.69	23.98
5690MHz Straddle 5.47-5.725GHz	Pass	4.93	17.87	17.87	23.98
5690MHz Straddle 5.725-5.85GHz	Pass	3.56	4.54	4.54	30.00
5775MHz	Pass	3.56	16.95	16.95	30.00
a160_Nss1,(6Mbps)_1TX	-	-	-	-	-
5250MHz Straddle 5.15-5.25GHz	Pass	2.89	8.56	8.56	30.00
5250MHz Straddle 5.25-5.35GHz	Pass	3.35	7.89	7.89	23.98
5570MHz	Pass	4.93	10.69	10.69	23.98


DG = Directional Gain; Port X = Port X output power
Inf = There's no restriction for the limit.

5.15-5.25GHz_a160_Nss1,(6Mbps)_1TX

AV Power

5250MHz Straddle 5.15-5.25GHz_TX

28/05/2025

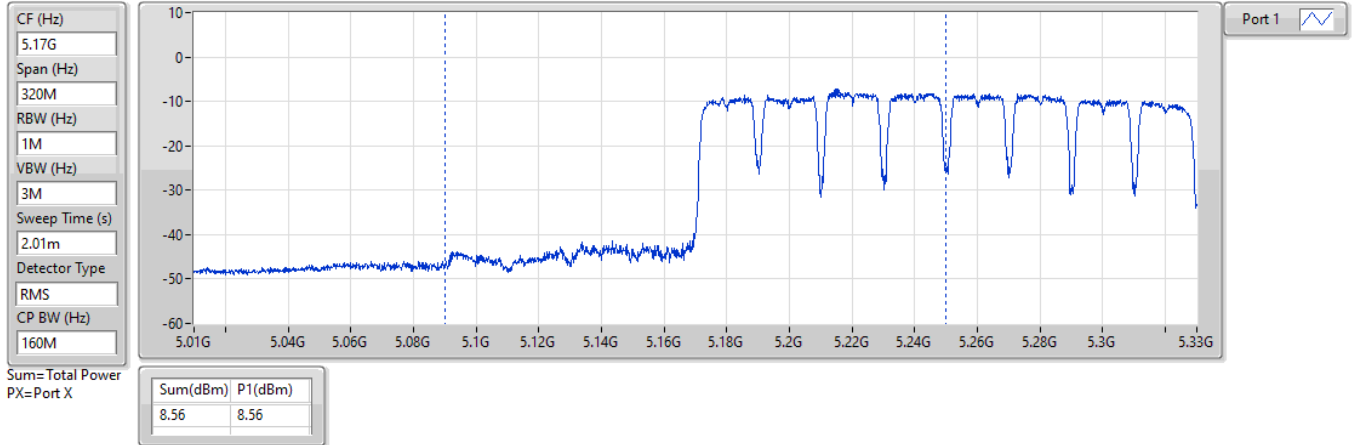


5.25-5.35GHz_a160_Nss1,(6Mbps)_1TX

AV Power

5250MHz Straddle 5.25-5.35GHz_TX

28/05/2025

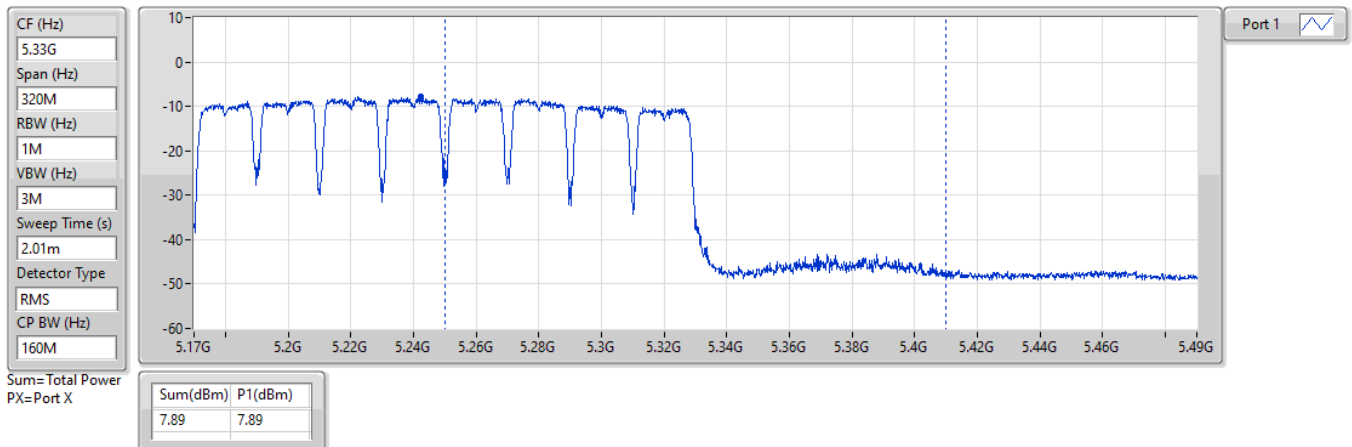


5.47-5.725GHz_a40_Nss1,(6Mbps)_1TX

AV Power

5710MHz Straddle 5.47-5.725GHz_TX

28/05/2025

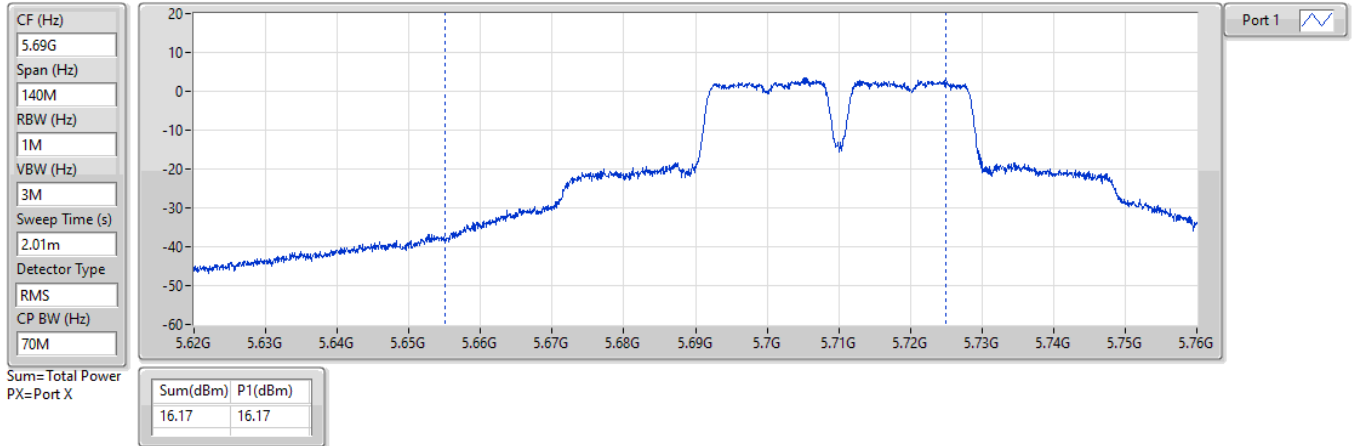


5.47-5.725GHz_a80_Nss1,(6Mbps)_1TX

AV Power

5690MHz Straddle 5.47-5.725GHz_TX

28/05/2025

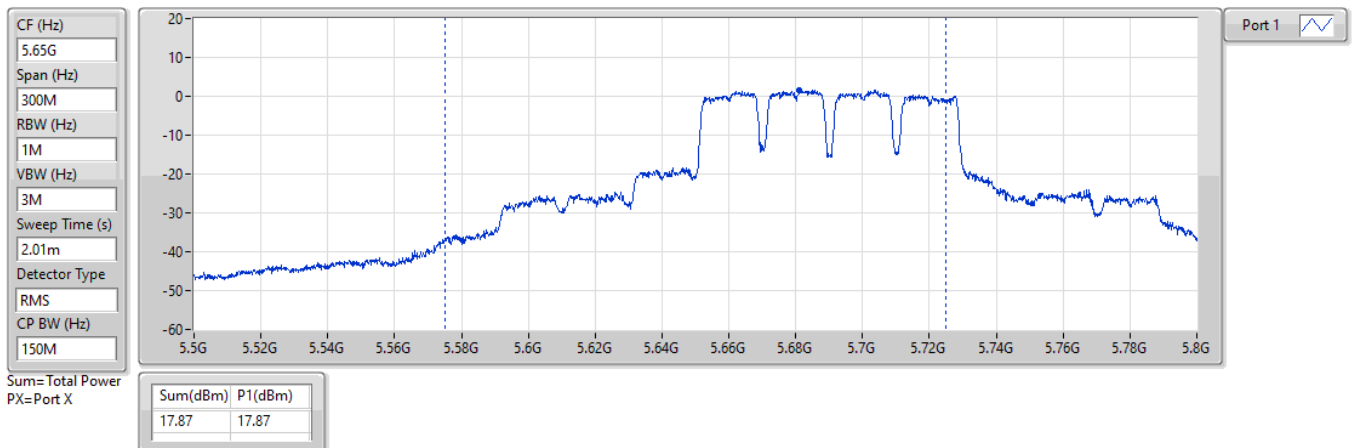



**Average Power_Non-Beamforming_
Radio 2_1T1S_Dipole_Indoor**

Appendix C.2

Summary

Mode	Total Power (dBm)	Total Power (W)
5.15-5.25GHz	-	-
802.11a_Nss1,(6Mbps)_1TX	18.01	0.06324
802.11be EHT20_Nss1,(MCS0)_1TX	18.33	0.06808
802.11be EHT40_Nss1,(MCS0)_1TX	18.83	0.07638
802.11be EHT80_Nss1,(MCS0)_1TX	17.99	0.06295
802.11be EHT160_Nss1,(MCS0)_1TX	16.21	0.04178
5.25-5.35GHz	-	-
802.11a_Nss1,(6Mbps)_1TX	17.49	0.05610
802.11be EHT20_Nss1,(MCS0)_1TX	17.91	0.06180
802.11be EHT40_Nss1,(MCS0)_1TX	18.26	0.06699
802.11be EHT80_Nss1,(MCS0)_1TX	17.95	0.06237
802.11be EHT160_Nss1,(MCS0)_1TX	15.78	0.03784
5.47-5.725GHz	-	-
802.11a_Nss1,(6Mbps)_1TX	17.47	0.05585
802.11be EHT20_Nss1,(MCS0)_1TX	17.64	0.05808
802.11be EHT40_Nss1,(MCS0)_1TX	18.21	0.06622
802.11be EHT80_Nss1,(MCS0)_1TX	17.73	0.05929
802.11be EHT160_Nss1,(MCS0)_1TX	16.72	0.04699
5.725-5.85GHz	-	-
802.11a_Nss1,(6Mbps)_1TX	18.51	0.07096
802.11be EHT20_Nss1,(MCS0)_1TX	18.61	0.07261
802.11be EHT40_Nss1,(MCS0)_1TX	18.03	0.06353
802.11be EHT80_Nss1,(MCS0)_1TX	17.63	0.05794



Average Power_Non-Beamforming_ Radio 2_1T1S_Dipole_Indoor

Appendix C.2

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Total Power (dBm)	Power Limit (dBm)
802.11a_Nss1,(6Mbps)_1TX	-	-	-	-	-
5180MHz	Pass	3.61	17.85	17.85	30.00
5200MHz	Pass	3.61	17.81	17.81	30.00
5240MHz	Pass	3.61	18.01	18.01	30.00
5260MHz	Pass	3.17	17.49	17.49	23.98
5300MHz	Pass	3.17	17.46	17.46	23.98
5320MHz	Pass	3.17	17.30	17.30	23.98
5500MHz	Pass	3.19	17.47	17.47	23.98
5580MHz	Pass	3.19	17.35	17.35	23.98
5700MHz	Pass	3.19	16.83	16.83	23.98
5720MHz Straddle 5.47-5.725GHz	Pass	3.19	16.45	16.45	22.87
5720MHz Straddle 5.725-5.85GHz	Pass	3.42	10.39	10.39	30.00
5745MHz	Pass	3.42	18.51	18.51	30.00
5785MHz	Pass	3.42	17.63	17.63	30.00
5825MHz	Pass	3.42	16.70	16.70	30.00
802.11be EHT20_Nss1,(MCS0)_1TX	-	-	-	-	-
5180MHz	Pass	3.61	18.01	18.01	30.00
5200MHz	Pass	3.61	18.00	18.00	30.00
5240MHz	Pass	3.61	18.33	18.33	30.00
5260MHz	Pass	3.17	17.91	17.91	23.98
5300MHz	Pass	3.17	17.60	17.60	23.98
5320MHz	Pass	3.17	17.38	17.38	23.98
5500MHz	Pass	3.19	17.64	17.64	23.98
5580MHz	Pass	3.19	17.43	17.43	23.98
5700MHz	Pass	3.19	15.38	15.38	23.98
5720MHz Straddle 5.47-5.725GHz	Pass	3.19	16.69	16.69	23.03
5720MHz Straddle 5.725-5.85GHz	Pass	3.42	11.53	11.53	30.00
5745MHz	Pass	3.42	18.61	18.61	30.00
5785MHz	Pass	3.42	17.86	17.86	30.00
5825MHz	Pass	3.42	16.94	16.94	30.00
802.11be EHT40_Nss1,(MCS0)_1TX	-	-	-	-	-
5190MHz	Pass	3.61	18.82	18.82	30.00
5230MHz	Pass	3.61	18.83	18.83	30.00
5270MHz	Pass	3.17	18.26	18.26	23.98
5310MHz	Pass	3.17	17.60	17.60	23.98
5510MHz	Pass	3.19	18.15	18.15	23.98
5550MHz	Pass	3.19	18.04	18.04	23.98
5670MHz	Pass	3.19	18.21	18.21	23.98
5710MHz Straddle 5.47-5.725GHz	Pass	3.19	18.08	18.08	23.98
5710MHz Straddle 5.725-5.85GHz	Pass	3.42	8.61	8.61	30.00
5755MHz	Pass	3.42	18.03	18.03	30.00
5795MHz	Pass	3.42	17.05	17.05	30.00
802.11be EHT80_Nss1,(MCS0)_1TX	-	-	-	-	-
5210MHz	Pass	3.61	17.99	17.99	30.00
5290MHz	Pass	3.17	17.95	17.95	23.98
5530MHz	Pass	3.19	17.66	17.66	23.98
5610MHz	Pass	3.19	17.73	17.73	23.98
5690MHz Straddle 5.47-5.725GHz	Pass	3.19	17.66	17.66	23.98
5690MHz Straddle 5.725-5.85GHz	Pass	3.42	4.38	4.38	30.00
5775MHz	Pass	3.42	17.63	17.63	30.00
802.11be EHT160_Nss1,(MCS0)_1TX	-	-	-	-	-
5250MHz Straddle 5.15-5.25GHz	Pass	3.61	16.21	16.21	30.00
5250MHz Straddle 5.25-5.35GHz	Pass	3.17	15.78	15.78	23.98
5570MHz	Pass	3.19	16.72	16.72	23.98


DG = Directional Gain; Port X = Port X output power
Inf = There's no restriction for the limit.

5.15-5.25GHz_802.11be EHT160_Nss1,(MCS0)_1TX

AV Power

5250MHz Straddle 5.15-5.25GHz_TX

20/05/2025

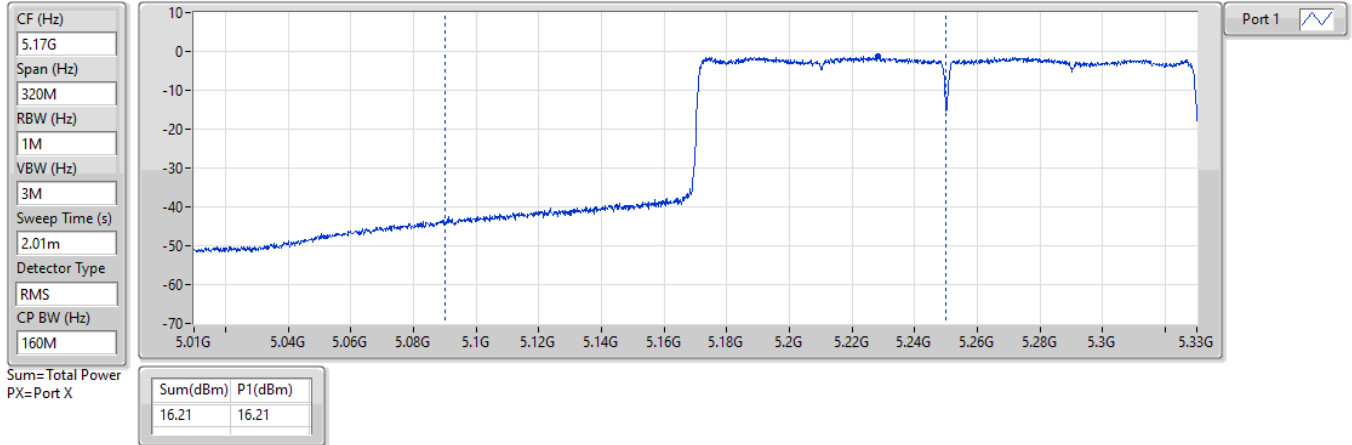


5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0)_1TX

AV Power

5250MHz Straddle 5.25-5.35GHz_TX

20/05/2025

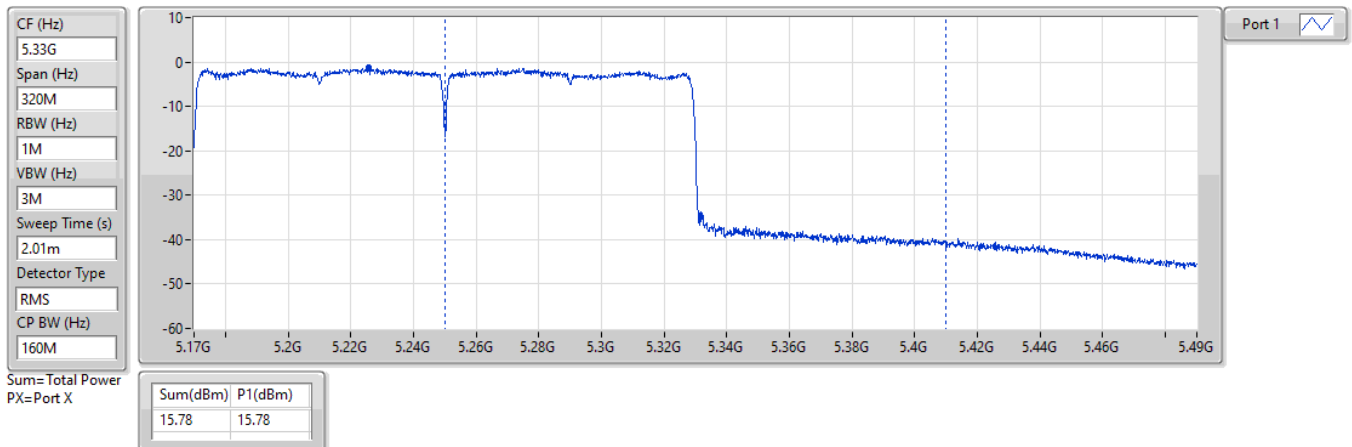



Average Power_Non-Beamforming_ Radio 2_2T1S_Dipole_Indoor

Appendix C.3

Summary

Mode	Total Power (dBm)	Total Power (W)
5.15-5.25GHz	-	-
802.11a_Nss1,(6Mbps)_2TX	21.48	0.14060
802.11be EHT20_Nss1,(MCS0)_2TX	21.79	0.15101
802.11be EHT40_Nss1,(MCS0)_2TX	21.99	0.15812
802.11be EHT80_Nss1,(MCS0)_2TX	21.46	0.13996
802.11be EHT160_Nss1,(MCS0)_2TX	17.52	0.05649
5.25-5.35GHz	-	-
802.11a_Nss1,(6Mbps)_2TX	21.13	0.12972
802.11be EHT20_Nss1,(MCS0)_2TX	21.19	0.13152
802.11be EHT40_Nss1,(MCS0)_2TX	21.51	0.14158
802.11be EHT80_Nss1,(MCS0)_2TX	21.10	0.12882
802.11be EHT160_Nss1,(MCS0)_2TX	17.76	0.05970
5.47-5.725GHz	-	-
802.11a_Nss1,(6Mbps)_2TX	20.91	0.12331
802.11be EHT20_Nss1,(MCS0)_2TX	21.06	0.12764
802.11be EHT40_Nss1,(MCS0)_2TX	21.38	0.13740
802.11be EHT80_Nss1,(MCS0)_2TX	20.92	0.12359
802.11be EHT160_Nss1,(MCS0)_2TX	18.33	0.06808
5.725-5.85GHz	-	-
802.11a_Nss1,(6Mbps)_2TX	21.82	0.15205
802.11be EHT20_Nss1,(MCS0)_2TX	22.01	0.15885
802.11be EHT40_Nss1,(MCS0)_2TX	21.53	0.14223
802.11be EHT80_Nss1,(MCS0)_2TX	21.06	0.12764



Average Power_Non-Beamforming_ Radio 2_2T1S_Dipole_Indoor

Appendix C.3

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Total Power (dBm)	Power Limit (dBm)
802.11a_Nss1,(6Mbps)_2TX	-	-	-	-	-	-
5180MHz	Pass	3.86	17.81	18.68	21.28	30.00
5200MHz	Pass	3.86	17.78	18.72	21.29	30.00
5240MHz	Pass	3.86	18.04	18.86	21.48	30.00
5260MHz	Pass	3.26	17.64	18.55	21.13	23.98
5300MHz	Pass	3.26	17.31	18.32	20.85	23.98
5320MHz	Pass	3.26	17.27	18.13	20.73	23.98
5500MHz	Pass	3.44	17.55	18.22	20.91	23.98
5580MHz	Pass	3.44	17.19	17.87	20.55	23.98
5700MHz	Pass	3.44	15.10	15.70	18.42	23.98
5720MHz Straddle 5.47-5.725GHz	Pass	3.44	16.30	17.34	19.86	23.03
5720MHz Straddle 5.725-5.85GHz	Pass	3.66	10.33	11.23	13.81	30.00
5745MHz	Pass	3.66	18.36	19.21	21.82	30.00
5785MHz	Pass	3.66	17.71	18.21	20.98	30.00
5825MHz	Pass	3.66	16.69	17.28	20.01	30.00
802.11be EHT20_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5180MHz	Pass	3.86	17.80	18.84	21.36	30.00
5200MHz	Pass	3.86	18.13	18.84	21.51	30.00
5240MHz	Pass	3.86	18.34	19.17	21.79	30.00
5260MHz	Pass	3.26	17.70	18.62	21.19	23.98
5300MHz	Pass	3.26	17.52	18.17	20.87	23.98
5320MHz	Pass	3.26	17.30	18.08	20.72	23.98
5500MHz	Pass	3.44	17.60	18.46	21.06	23.98
5580MHz	Pass	3.44	17.28	17.89	20.61	23.98
5700MHz	Pass	3.44	15.05	15.51	18.30	23.98
5720MHz Straddle 5.47-5.725GHz	Pass	3.44	16.28	17.22	19.79	23.05
5720MHz Straddle 5.725-5.85GHz	Pass	3.66	11.10	12.07	14.62	30.00
5745MHz	Pass	3.66	18.69	19.28	22.01	30.00
5785MHz	Pass	3.66	17.76	17.47	20.63	30.00
5825MHz	Pass	3.66	16.82	17.57	20.22	30.00
802.11be EHT40_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5190MHz	Pass	3.86	18.45	19.08	21.79	30.00
5230MHz	Pass	3.86	18.72	19.22	21.99	30.00
5270MHz	Pass	3.26	17.81	19.09	21.51	23.98
5310MHz	Pass	3.26	18.19	18.65	21.44	23.98
5510MHz	Pass	3.44	17.76	18.66	21.24	23.98
5550MHz	Pass	3.44	17.92	18.78	21.38	23.98
5670MHz	Pass	3.44	17.73	18.45	21.12	23.98
5710MHz Straddle 5.47-5.725GHz	Pass	3.44	17.68	18.51	21.13	23.98
5710MHz Straddle 5.725-5.85GHz	Pass	3.66	8.03	8.96	11.53	30.00
5755MHz	Pass	3.66	17.68	19.23	21.53	30.00
5795MHz	Pass	3.66	16.77	18.11	20.50	30.00
802.11be EHT80_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5210MHz	Pass	3.86	17.97	18.88	21.46	30.00
5290MHz	Pass	3.26	17.70	18.44	21.10	23.98
5530MHz	Pass	3.44	17.66	18.15	20.92	23.98
5610MHz	Pass	3.44	17.50	18.21	20.88	23.98
5690MHz Straddle 5.47-5.725GHz	Pass	3.44	17.27	17.95	20.63	23.98
5690MHz Straddle 5.725-5.85GHz	Pass	3.66	3.93	4.68	7.33	30.00
5775MHz	Pass	3.66	17.55	18.50	21.06	30.00
802.11be EHT160_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5250MHz Straddle 5.15-5.25GHz	Pass	3.86	14.50	14.52	17.52	30.00
5250MHz Straddle 5.25-5.35GHz	Pass	3.26	14.13	15.30	17.76	23.98
5570MHz	Pass	3.44	15.05	15.58	18.33	23.98


DG = Directional Gain; Port X = Port X output power
Inf = There's no restriction for the limit.

5.15-5.25GHz_802.11be EHT160_Nss1,(MCS0)_2TX

AV Power

5250MHz Straddle 5.15-5.25GHz_TX

20/05/2025

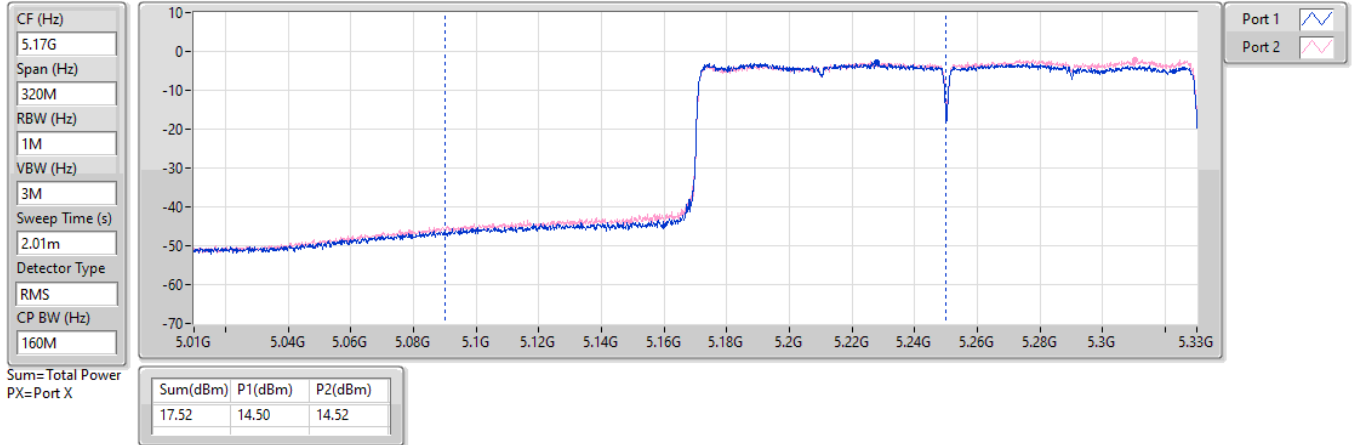


5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0)_2TX

AV Power

5250MHz Straddle 5.25-5.35GHz_TX

20/05/2025

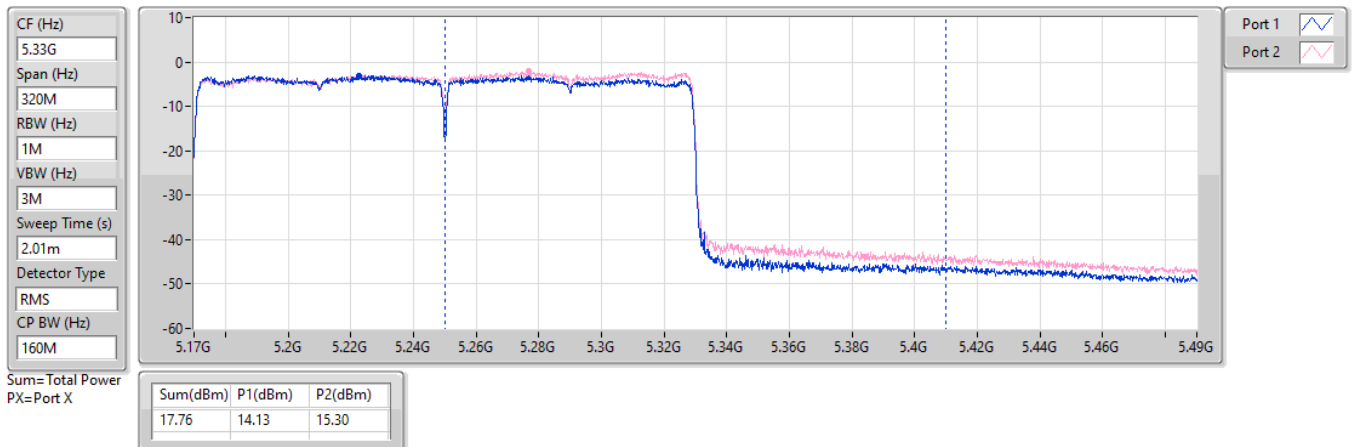



**Average Power_Non-Beamforming_
Radio 2_2T2S_Dipole_Indoor**

Appendix C.4

Summary

Mode	Total Power (dBm)	Total Power (W)
5.15-5.25GHz	-	-
802.11be EHT20_Nss2,(MCS0)_2TX	21.74	0.14928
802.11be EHT40_Nss2,(MCS0)_2TX	22.12	0.16293
802.11be EHT80_Nss2,(MCS0)_2TX	21.52	0.14191
802.11be EHT160_Nss2,(MCS0)_2TX	17.80	0.06026
5.25-5.35GHz	-	-
802.11be EHT20_Nss2,(MCS0)_2TX	21.26	0.13366
802.11be EHT40_Nss2,(MCS0)_2TX	21.62	0.14521
802.11be EHT80_Nss2,(MCS0)_2TX	21.07	0.12794
802.11be EHT160_Nss2,(MCS0)_2TX	18.03	0.06353
5.47-5.725GHz	-	-
802.11be EHT20_Nss2,(MCS0)_2TX	20.61	0.11508
802.11be EHT40_Nss2,(MCS0)_2TX	21.53	0.14223
802.11be EHT80_Nss2,(MCS0)_2TX	20.99	0.12560
802.11be EHT160_Nss2,(MCS0)_2TX	17.84	0.06081
5.725-5.85GHz	-	-
802.11be EHT20_Nss2,(MCS0)_2TX	22.05	0.16032
802.11be EHT40_Nss2,(MCS0)_2TX	21.74	0.14928
802.11be EHT80_Nss2,(MCS0)_2TX	21.00	0.12589



Average Power_Non-Beamforming_ Radio 2_2T2S_Dipole_Indoor

Appendix C.4

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Total Power (dBm)	Power Limit (dBm)
802.11be EHT20_Nss2,(MCS0)_2TX	-	-	-	-	-	-
5180MHz	Pass	3.86	18.03	18.72	21.40	30.00
5200MHz	Pass	3.86	17.97	18.99	21.52	30.00
5240MHz	Pass	3.86	18.33	19.10	21.74	30.00
5260MHz	Pass	3.26	17.80	18.65	21.26	23.98
5300MHz	Pass	3.26	17.69	18.31	21.02	23.98
5320MHz	Pass	3.26	17.35	18.25	20.83	23.98
5500MHz	Pass	3.44	17.50	17.08	20.31	23.98
5580MHz	Pass	3.44	17.28	17.89	20.61	23.98
5700MHz	Pass	3.44	15.46	16.07	18.79	23.98
5720MHz Straddle 5.47-5.725GHz	Pass	3.44	16.37	17.34	19.89	22.92
5720MHz Straddle 5.725-5.85GHz	Pass	3.66	11.21	12.25	14.77	30.00
5745MHz	Pass	3.66	18.59	19.44	22.05	30.00
5785MHz	Pass	3.66	17.82	18.45	21.16	30.00
5825MHz	Pass	3.66	16.77	17.11	19.95	30.00
802.11be EHT40_Nss2,(MCS0)_2TX	-	-	-	-	-	-
5190MHz	Pass	3.86	18.36	19.10	21.76	30.00
5230MHz	Pass	3.86	18.88	19.32	22.12	30.00
5270MHz	Pass	3.26	18.12	19.05	21.62	23.98
5310MHz	Pass	3.26	17.88	18.58	21.25	23.98
5510MHz	Pass	3.44	17.94	19.00	21.51	23.98
5550MHz	Pass	3.44	18.09	18.91	21.53	23.98
5670MHz	Pass	3.44	18.08	18.64	21.38	23.98
5710MHz Straddle 5.47-5.725GHz	Pass	3.44	17.87	18.68	21.30	23.98
5710MHz Straddle 5.725-5.85GHz	Pass	3.66	8.09	9.15	11.66	30.00
5755MHz	Pass	3.66	18.12	19.26	21.74	30.00
5795MHz	Pass	3.66	17.07	18.17	20.67	30.00
802.11be EHT80_Nss2,(MCS0)_2TX	-	-	-	-	-	-
5210MHz	Pass	3.86	17.94	19.02	21.52	30.00
5290MHz	Pass	3.26	17.74	18.35	21.07	23.98
5530MHz	Pass	3.44	17.56	18.37	20.99	23.98
5610MHz	Pass	3.44	17.51	18.22	20.89	23.98
5690MHz Straddle 5.47-5.725GHz	Pass	3.44	17.24	17.99	20.64	23.98
5690MHz Straddle 5.725-5.85GHz	Pass	3.66	3.95	4.78	7.40	30.00
5775MHz	Pass	3.66	17.52	18.41	21.00	30.00
802.11be EHT160_Nss2,(MCS0)_2TX	-	-	-	-	-	-
5250MHz Straddle 5.15-5.25GHz	Pass	3.86	14.74	14.83	17.80	30.00
5250MHz Straddle 5.25-5.35GHz	Pass	3.26	14.37	15.58	18.03	23.98
5570MHz	Pass	3.44	14.63	15.03	17.84	23.98


DG = Directional Gain; Port X = Port X output power
Inf = There's no restriction for the limit.

5.15-5.25GHz_802.11be EHT160_Nss2,(MCS0)_2TX

AV Power

5250MHz Straddle 5.15-5.25GHz_TX

20/05/2025

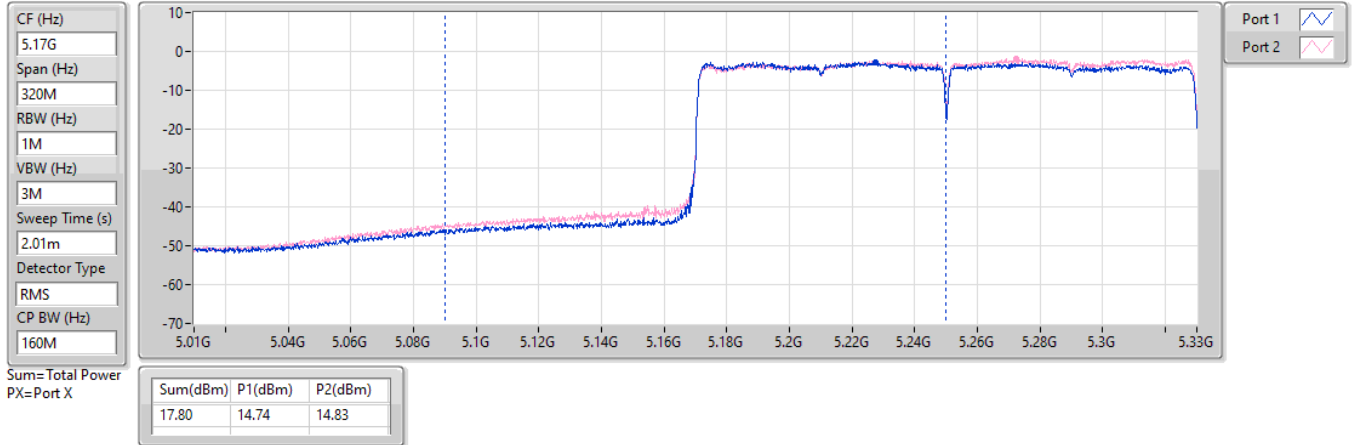


5.25-5.35GHz_802.11be EHT160_Nss2,(MCS0)_2TX

AV Power

5250MHz Straddle 5.25-5.35GHz_TX

20/05/2025

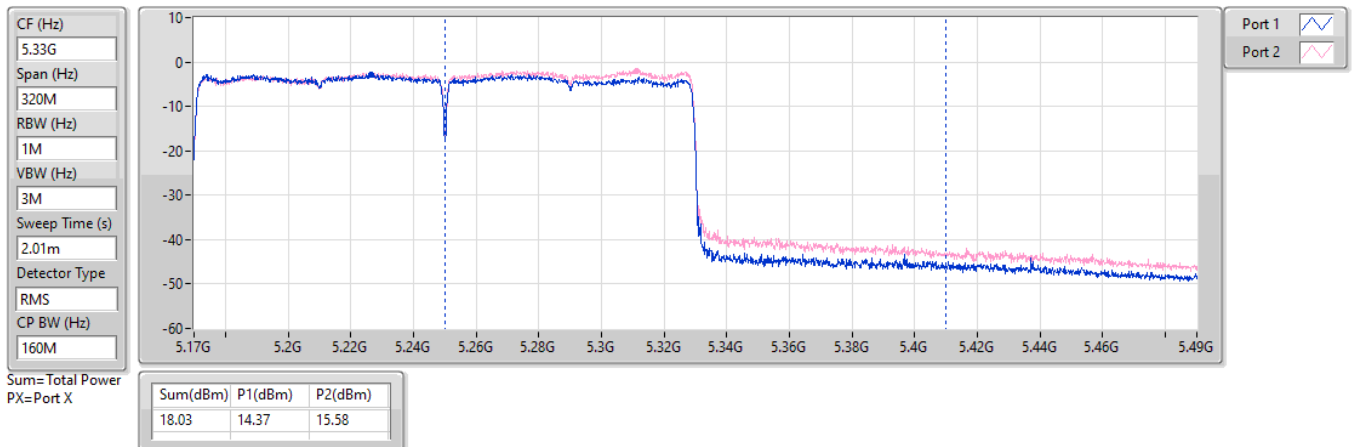



**Average Power_Non-Beamforming_
Radio 2_1T1S_Patch_Indoor**

Appendix C.5

Summary

Mode	Total Power (dBm)	Total Power (W)
5.15-5.25GHz	-	-
802.11a_Nss1,(6Mbps)_1TX	18.01	0.06324
802.11be EHT20_Nss1,(MCS0)_1TX	18.33	0.06808
802.11be EHT40_Nss1,(MCS0)_1TX	18.83	0.07638
802.11be EHT80_Nss1,(MCS0)_1TX	17.99	0.06295
802.11be EHT160_Nss1,(MCS0)_1TX	14.52	0.02831
5.25-5.35GHz	-	-
802.11a_Nss1,(6Mbps)_1TX	17.49	0.05610
802.11be EHT20_Nss1,(MCS0)_1TX	17.91	0.06180
802.11be EHT40_Nss1,(MCS0)_1TX	18.26	0.06699
802.11be EHT80_Nss1,(MCS0)_1TX	17.95	0.06237
802.11be EHT160_Nss1,(MCS0)_1TX	14.19	0.02624
5.47-5.725GHz	-	-
802.11a_Nss1,(6Mbps)_1TX	17.81	0.06039
802.11be EHT20_Nss1,(MCS0)_1TX	17.64	0.05808
802.11be EHT40_Nss1,(MCS0)_1TX	18.15	0.06531
802.11be EHT80_Nss1,(MCS0)_1TX	17.73	0.05929
802.11be EHT160_Nss1,(MCS0)_1TX	15.57	0.03606
5.725-5.85GHz	-	-
802.11a_Nss1,(6Mbps)_1TX	18.51	0.07096
802.11be EHT20_Nss1,(MCS0)_1TX	18.61	0.07261
802.11be EHT40_Nss1,(MCS0)_1TX	18.03	0.06353
802.11be EHT80_Nss1,(MCS0)_1TX	17.63	0.05794



Average Power_Non-Beamforming_ Radio 2_1T1S_Patch_Indoor

Appendix C.5

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Total Power (dBm)	Power Limit (dBm)
802.11a_Nss1,(6Mbps)_1TX	-	-	-	-	-
5180MHz	Pass	10.19	17.85	17.85	25.81
5200MHz	Pass	10.19	17.81	17.81	25.81
5240MHz	Pass	10.19	18.01	18.01	25.81
5260MHz	Pass	10.52	17.49	17.49	19.46
5300MHz	Pass	10.52	17.46	17.46	19.46
5320MHz	Pass	10.52	17.30	17.30	19.46
5500MHz	Pass	10.33	17.47	17.47	19.65
5580MHz	Pass	10.33	17.35	17.35	19.65
5700MHz	Pass	10.33	17.81	17.81	19.65
5720MHz Straddle 5.47-5.725GHz	Pass	10.33	16.45	16.45	18.54
5720MHz Straddle 5.725-5.85GHz	Pass	10.28	10.39	10.39	25.72
5745MHz	Pass	10.28	18.51	18.51	25.72
5785MHz	Pass	10.28	17.63	17.63	25.72
5825MHz	Pass	10.28	16.70	16.70	25.72
802.11be EHT20_Nss1,(MCS0)_1TX	-	-	-	-	-
5180MHz	Pass	10.19	18.01	18.01	25.81
5200MHz	Pass	10.19	18.00	18.00	25.81
5240MHz	Pass	10.19	18.33	18.33	25.81
5260MHz	Pass	10.52	17.91	17.91	19.46
5300MHz	Pass	10.52	17.60	17.60	19.46
5320MHz	Pass	10.52	17.38	17.38	19.46
5500MHz	Pass	10.33	17.64	17.64	19.65
5580MHz	Pass	10.33	17.43	17.43	19.65
5700MHz	Pass	10.33	14.44	14.44	19.65
5720MHz Straddle 5.47-5.725GHz	Pass	10.33	16.69	16.69	18.70
5720MHz Straddle 5.725-5.85GHz	Pass	10.28	11.53	11.53	25.72
5745MHz	Pass	10.28	18.61	18.61	25.72
5785MHz	Pass	10.28	17.86	17.86	25.72
5825MHz	Pass	10.28	16.94	16.94	25.72
802.11be EHT40_Nss1,(MCS0)_1TX	-	-	-	-	-
5190MHz	Pass	10.19	18.82	18.82	25.81
5230MHz	Pass	10.19	18.83	18.83	25.81
5270MHz	Pass	10.52	18.26	18.26	19.46
5310MHz	Pass	10.52	17.60	17.60	19.46
5510MHz	Pass	10.33	18.15	18.15	19.65
5550MHz	Pass	10.33	18.04	18.04	19.65
5670MHz	Pass	10.33	16.98	16.98	19.65
5710MHz Straddle 5.47-5.725GHz	Pass	10.33	18.08	18.08	19.65
5710MHz Straddle 5.725-5.85GHz	Pass	10.28	8.61	8.61	25.72
5755MHz	Pass	10.28	18.03	18.03	25.72
5795MHz	Pass	10.28	17.05	17.05	25.72
802.11be EHT80_Nss1,(MCS0)_1TX	-	-	-	-	-
5210MHz	Pass	10.19	17.99	17.99	25.81
5290MHz	Pass	10.52	17.95	17.95	19.46
5530MHz	Pass	10.33	17.66	17.66	19.65
5610MHz	Pass	10.33	17.73	17.73	19.65
5690MHz Straddle 5.47-5.725GHz	Pass	10.33	17.66	17.66	19.65
5690MHz Straddle 5.725-5.85GHz	Pass	10.28	4.38	4.38	25.72
5775MHz	Pass	10.28	17.63	17.63	25.72
802.11be EHT160_Nss1,(MCS0)_1TX	-	-	-	-	-
5250MHz Straddle 5.15-5.25GHz	Pass	10.19	14.52	14.52	25.81
5250MHz Straddle 5.25-5.35GHz	Pass	10.52	14.19	14.19	19.46
5570MHz	Pass	10.33	15.57	15.57	19.65


DG = Directional Gain; Port X = Port X output power
Inf = There's no restriction for the limit.

5.15-5.25GHz_802.11be EHT160_Nss1,(MCS0)_1TX

AV Power

5250MHz Straddle 5.15-5.25GHz_TX

20/05/2025

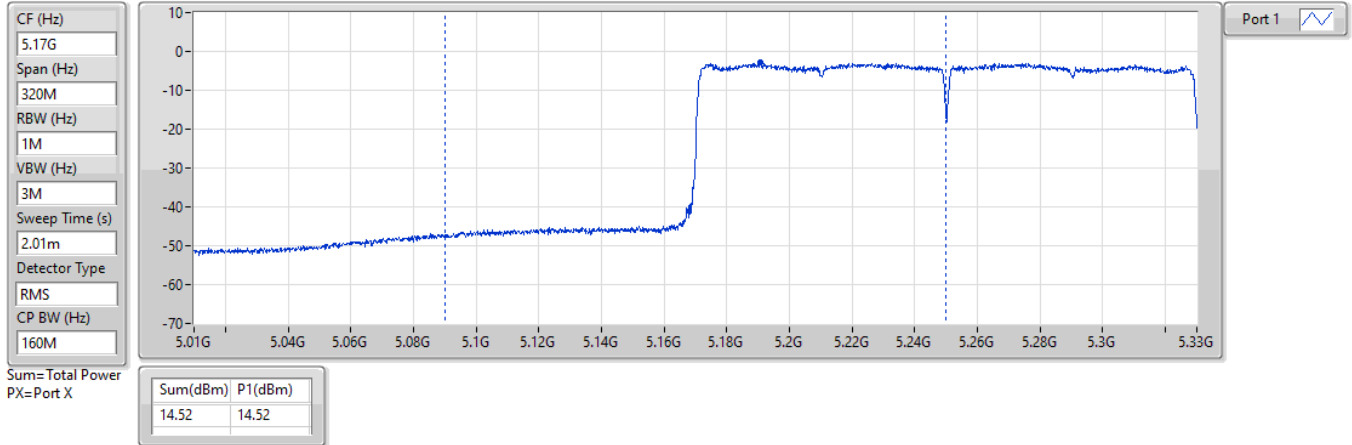


5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0)_1TX

AV Power

5250MHz Straddle 5.25-5.35GHz_TX

20/05/2025

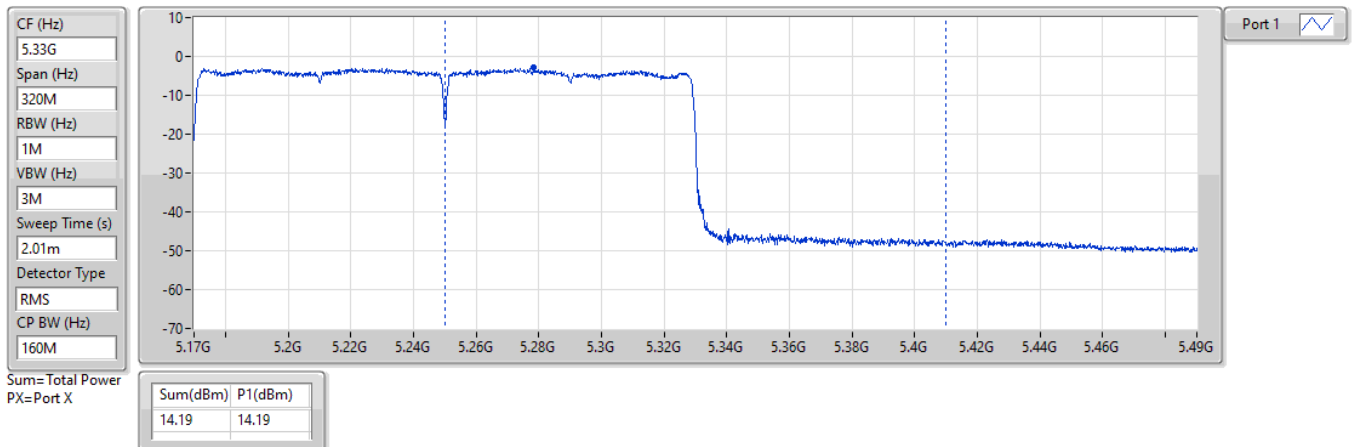



**Average Power_Non-Beamforming_
Radio 2_2T1S_Patch_Indoor**

Appendix C.6

Summary

Mode	Total Power (dBm)	Total Power (W)
5.15-5.25GHz	-	-
802.11a_Nss1,(6Mbps)_2TX	21.48	0.14060
802.11be EHT20_Nss1,(MCS0)_2TX	21.79	0.15101
802.11be EHT40_Nss1,(MCS0)_2TX	21.99	0.15812
802.11be EHT80_Nss1,(MCS0)_2TX	21.46	0.13996
802.11be EHT160_Nss1,(MCS0)_2TX	15.95	0.03936
5.25-5.35GHz	-	-
802.11a_Nss1,(6Mbps)_2TX	16.82	0.04808
802.11be EHT20_Nss1,(MCS0)_2TX	17.28	0.05346
802.11be EHT40_Nss1,(MCS0)_2TX	18.85	0.07674
802.11be EHT80_Nss1,(MCS0)_2TX	18.65	0.07328
802.11be EHT160_Nss1,(MCS0)_2TX	16.21	0.04178
5.47-5.725GHz	-	-
802.11a_Nss1,(6Mbps)_2TX	16.73	0.04710
802.11be EHT20_Nss1,(MCS0)_2TX	17.36	0.05445
802.11be EHT40_Nss1,(MCS0)_2TX	18.88	0.07727
802.11be EHT80_Nss1,(MCS0)_2TX	18.75	0.07499
802.11be EHT160_Nss1,(MCS0)_2TX	18.01	0.06324
5.725-5.85GHz	-	-
802.11a_Nss1,(6Mbps)_2TX	21.82	0.15205
802.11be EHT20_Nss1,(MCS0)_2TX	22.01	0.15885
802.11be EHT40_Nss1,(MCS0)_2TX	21.53	0.14223
802.11be EHT80_Nss1,(MCS0)_2TX	21.06	0.12764



Average Power_Non-Beamforming_ Radio 2_2T1S_Patch_Indoor

Appendix C.6

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Total Power (dBm)	Power Limit (dBm)
802.11a_Nss1,(6Mbps)_2TX	-	-	-	-	-	-
5180MHz	Pass	10.44	17.81	18.68	21.28	25.56
5200MHz	Pass	10.44	17.78	18.72	21.29	25.56
5240MHz	Pass	10.44	18.04	18.86	21.48	25.56
5260MHz	Pass	10.61	13.34	13.66	16.51	19.37
5300MHz	Pass	10.61	13.43	13.84	16.65	19.37
5320MHz	Pass	10.61	13.75	13.86	16.82	19.37
5500MHz	Pass	10.58	13.38	13.71	16.56	19.40
5580MHz	Pass	10.58	13.53	13.91	16.73	19.40
5700MHz	Pass	10.58	13.34	13.76	16.57	19.40
5720MHz Straddle 5.47-5.725GHz	Pass	10.58	12.16	12.87	15.54	18.38
5720MHz Straddle 5.725-5.85GHz	Pass	10.52	6.11	6.86	9.51	25.48
5745MHz	Pass	10.52	18.36	19.21	21.82	25.48
5785MHz	Pass	10.52	17.71	18.21	20.98	25.48
5825MHz	Pass	10.52	16.69	17.28	20.01	25.48
802.11be EHT20_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5180MHz	Pass	10.44	17.80	18.84	21.36	25.56
5200MHz	Pass	10.44	18.13	18.84	21.51	25.56
5240MHz	Pass	10.44	18.34	19.17	21.79	25.56
5260MHz	Pass	10.61	14.15	14.37	17.27	19.37
5300MHz	Pass	10.61	14.09	14.40	17.26	19.37
5320MHz	Pass	10.61	14.14	14.40	17.28	19.37
5500MHz	Pass	10.58	13.89	14.48	17.21	19.40
5580MHz	Pass	10.58	14.03	14.65	17.36	19.40
5700MHz	Pass	10.58	13.64	14.00	16.83	19.40
5720MHz Straddle 5.47-5.725GHz	Pass	10.58	12.69	13.31	16.02	18.96
5720MHz Straddle 5.725-5.85GHz	Pass	10.52	7.53	8.34	10.96	25.48
5745MHz	Pass	10.52	18.69	19.28	22.01	25.48
5785MHz	Pass	10.52	17.76	17.47	20.63	25.48
5825MHz	Pass	10.52	16.82	17.57	20.22	25.48
802.11be EHT40_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5190MHz	Pass	10.44	18.45	19.08	21.79	25.56
5230MHz	Pass	10.44	18.72	19.22	21.99	25.56
5270MHz	Pass	10.61	15.68	15.99	18.85	19.37
5310MHz	Pass	10.61	15.70	15.98	18.85	19.37
5510MHz	Pass	10.58	15.22	16.12	18.70	19.40
5550MHz	Pass	10.58	15.50	16.21	18.88	19.40
5670MHz	Pass	10.58	15.48	16.03	18.77	19.40
5710MHz Straddle 5.47-5.725GHz	Pass	10.58	15.35	15.88	18.63	19.40
5710MHz Straddle 5.725-5.85GHz	Pass	10.52	5.78	6.40	9.11	25.48
5755MHz	Pass	10.52	17.68	19.23	21.53	25.48
5795MHz	Pass	10.52	16.77	18.11	20.50	25.48
802.11be EHT80_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5210MHz	Pass	10.44	17.97	18.88	21.46	25.56
5290MHz	Pass	10.61	15.49	15.78	18.65	19.37
5530MHz	Pass	10.58	15.46	16.00	18.75	19.40
5610MHz	Pass	10.58	15.59	15.83	18.72	19.40
5690MHz Straddle 5.47-5.725GHz	Pass	10.58	15.39	16.05	18.74	19.40
5690MHz Straddle 5.725-5.85GHz	Pass	10.52	2.05	2.98	5.55	25.48
5775MHz	Pass	10.52	17.55	18.50	21.06	25.48
802.11be EHT160_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5250MHz Straddle 5.15-5.25GHz	Pass	10.44	13.04	12.83	15.95	25.56
5250MHz Straddle 5.25-5.35GHz	Pass	10.61	12.88	13.50	16.21	19.37
5570MHz	Pass	10.58	14.77	15.22	18.01	19.40


DG = Directional Gain; Port X = Port X output power
Inf = There's no restriction for the limit.

5.15-5.25GHz_802.11be EHT160_Nss1,(MCS0)_2TX

AV Power

5250MHz Straddle 5.15-5.25GHz_TX

20/05/2025

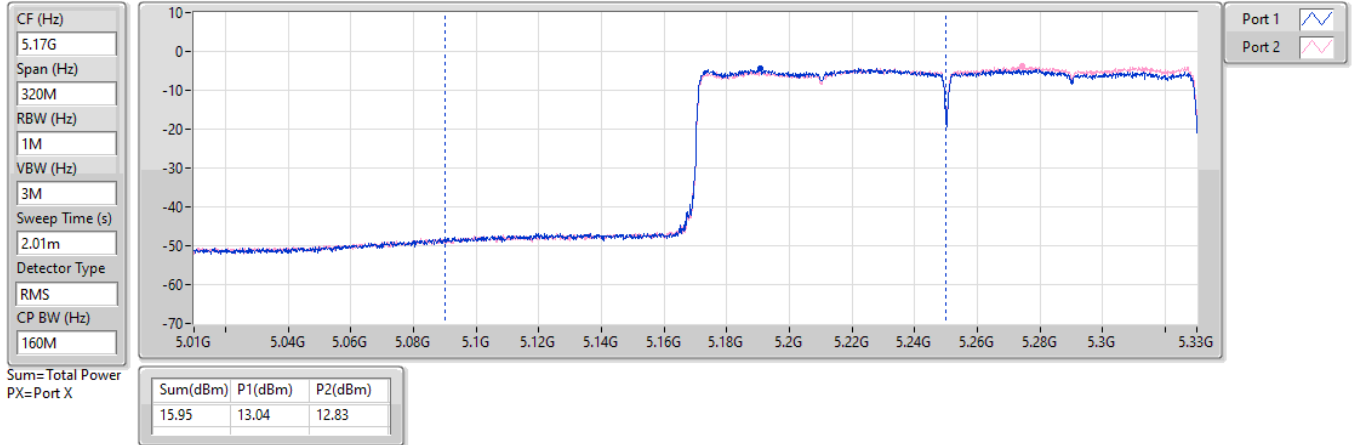


5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0)_2TX

AV Power

5250MHz Straddle 5.25-5.35GHz_TX

20/05/2025

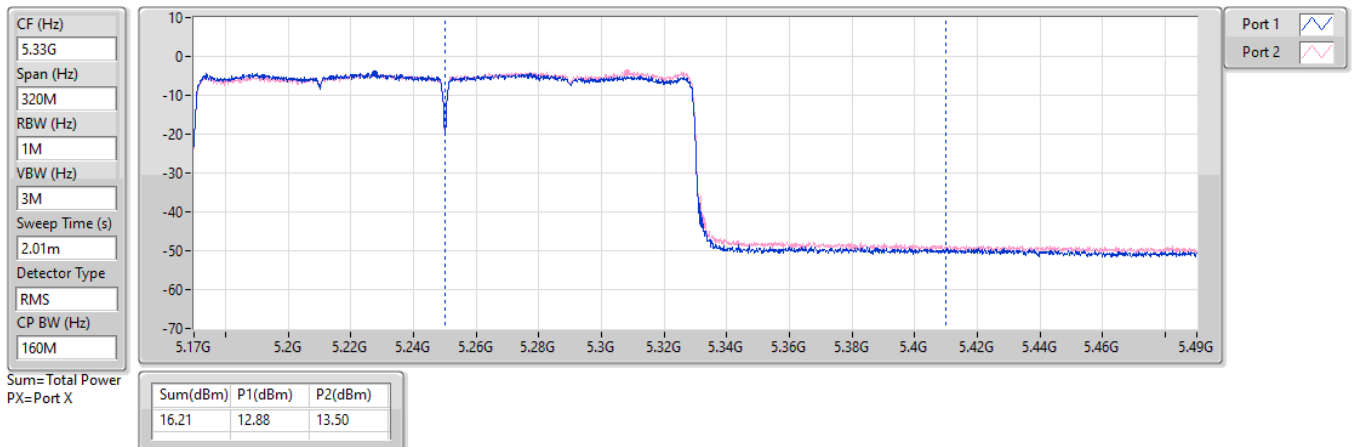



**Average Power_Non-Beamforming_
Radio 2_2T2S_Patch_Indoor**

Appendix C.7

Summary

Mode	Total Power (dBm)	Total Power (W)
5.15-5.25GHz	-	-
802.11be EHT20_Nss2,(MCS0)_2TX	21.74	0.14928
802.11be EHT40_Nss2,(MCS0)_2TX	22.12	0.16293
802.11be EHT80_Nss2,(MCS0)_2TX	21.52	0.14191
802.11be EHT160_Nss2,(MCS0)_2TX	15.45	0.03508
5.25-5.35GHz	-	-
802.11be EHT20_Nss2,(MCS0)_2TX	18.79	0.07568
802.11be EHT40_Nss2,(MCS0)_2TX	18.82	0.07621
802.11be EHT80_Nss2,(MCS0)_2TX	18.80	0.07586
802.11be EHT160_Nss2,(MCS0)_2TX	15.66	0.03681
5.47-5.725GHz	-	-
802.11be EHT20_Nss2,(MCS0)_2TX	18.70	0.07413
802.11be EHT40_Nss2,(MCS0)_2TX	18.80	0.07586
802.11be EHT80_Nss2,(MCS0)_2TX	18.89	0.07745
802.11be EHT160_Nss2,(MCS0)_2TX	17.39	0.05483
5.725-5.85GHz	-	-
802.11be EHT20_Nss2,(MCS0)_2TX	22.05	0.16032
802.11be EHT40_Nss2,(MCS0)_2TX	21.74	0.14928
802.11be EHT80_Nss2,(MCS0)_2TX	21.00	0.12589



Average Power_Non-Beamforming_ Radio 2_2T2S_Patch_Indoor

Appendix C.7

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Total Power (dBm)	Power Limit (dBm)
802.11be EHT20_Nss2,(MCS0)_2TX	-	-	-	-	-	-
5180MHz	Pass	10.44	18.03	18.72	21.40	25.56
5200MHz	Pass	10.44	17.97	18.99	21.52	25.56
5240MHz	Pass	10.44	18.33	19.10	21.74	25.56
5260MHz	Pass	10.61	15.36	16.17	18.79	19.37
5300MHz	Pass	10.61	15.32	16.13	18.75	19.37
5320MHz	Pass	10.61	15.31	16.16	18.77	19.37
5500MHz	Pass	10.58	15.29	16.04	18.69	19.40
5580MHz	Pass	10.58	15.50	15.88	18.70	19.40
5700MHz	Pass	10.58	12.81	13.28	16.06	19.40
5720MHz Straddle 5.47-5.725GHz	Pass	10.58	14.58	15.32	17.98	18.52
5720MHz Straddle 5.725-5.85GHz	Pass	10.52	9.43	10.22	12.85	25.48
5745MHz	Pass	10.52	18.59	19.44	22.05	25.48
5785MHz	Pass	10.52	17.82	18.45	21.16	25.48
5825MHz	Pass	10.52	16.77	17.11	19.95	25.48
802.11be EHT40_Nss2,(MCS0)_2TX	-	-	-	-	-	-
5190MHz	Pass	10.44	18.36	19.10	21.76	25.56
5230MHz	Pass	10.44	18.88	19.32	22.12	25.56
5270MHz	Pass	10.61	15.63	15.99	18.82	19.37
5310MHz	Pass	10.61	15.42	15.83	18.64	19.37
5510MHz	Pass	10.58	15.32	16.15	18.77	19.40
5550MHz	Pass	10.58	15.32	16.14	18.76	19.40
5670MHz	Pass	10.58	14.59	14.96	17.79	19.40
5710MHz Straddle 5.47-5.725GHz	Pass	10.58	15.37	16.18	18.80	19.40
5710MHz Straddle 5.725-5.85GHz	Pass	10.52	5.76	6.61	9.22	25.48
5755MHz	Pass	10.52	18.12	19.26	21.74	25.48
5795MHz	Pass	10.52	17.07	18.17	20.67	25.48
802.11be EHT80_Nss2,(MCS0)_2TX	-	-	-	-	-	-
5210MHz	Pass	10.44	17.94	19.02	21.52	25.56
5290MHz	Pass	10.61	15.60	15.98	18.80	19.37
5530MHz	Pass	10.58	15.51	16.16	18.86	19.40
5610MHz	Pass	10.58	15.54	16.03	18.80	19.40
5690MHz Straddle 5.47-5.725GHz	Pass	10.58	15.52	16.22	18.89	19.40
5690MHz Straddle 5.725-5.85GHz	Pass	10.52	2.23	2.98	5.63	25.48
5775MHz	Pass	10.52	17.52	18.41	21.00	25.48
802.11be EHT160_Nss2,(MCS0)_2TX	-	-	-	-	-	-
5250MHz Straddle 5.15-5.25GHz	Pass	10.44	12.51	12.37	15.45	25.56
5250MHz Straddle 5.25-5.35GHz	Pass	10.61	12.14	13.11	15.66	19.37
5570MHz	Pass	10.58	14.24	14.52	17.39	19.40


DG = Directional Gain; Port X = Port X output power
Inf = There's no restriction for the limit.

5.15-5.25GHz_802.11be EHT160_Nss2,(MCS0)_2TX

AV Power

5250MHz Straddle 5.15-5.25GHz_TX

20/05/2025

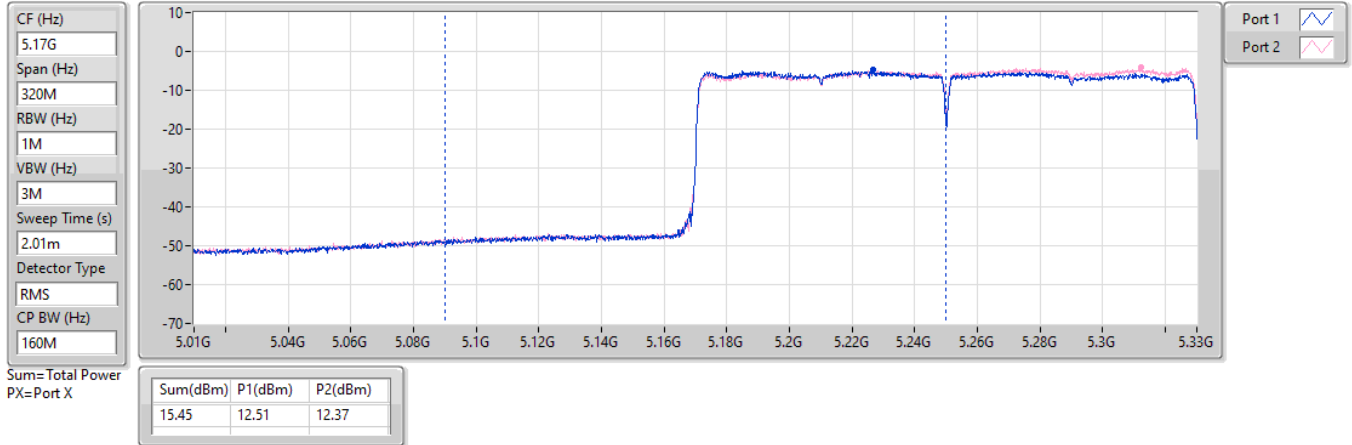


5.25-5.35GHz_802.11be EHT160_Nss2,(MCS0)_2TX

AV Power

5250MHz Straddle 5.25-5.35GHz_TX

20/05/2025

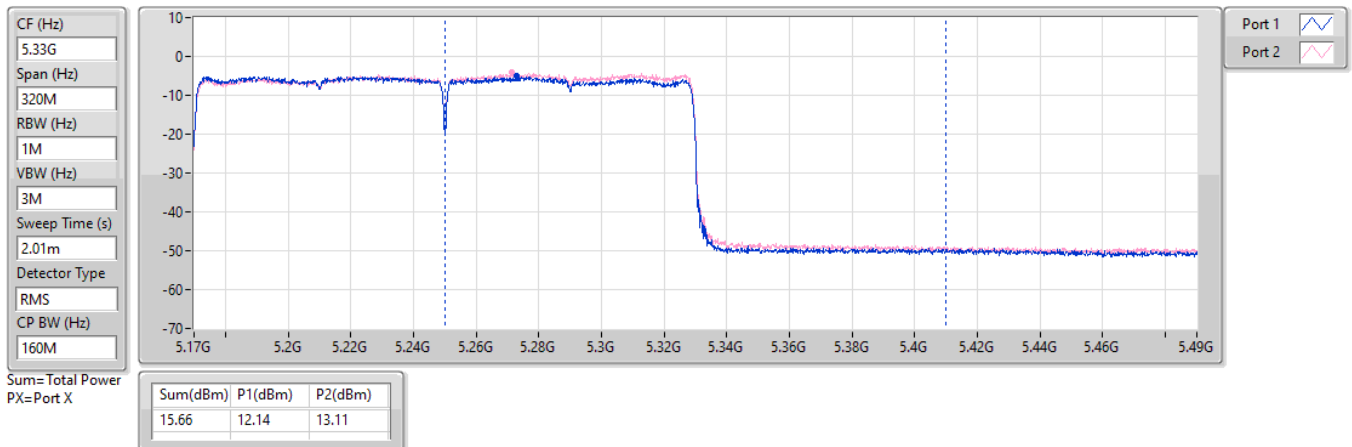


5.47-5.725GHz_802.11be EHT40_Nss2,(MCS0)_2TX

AV Power

5710MHz Straddle 5.47-5.725GHz_TX

20/05/2025

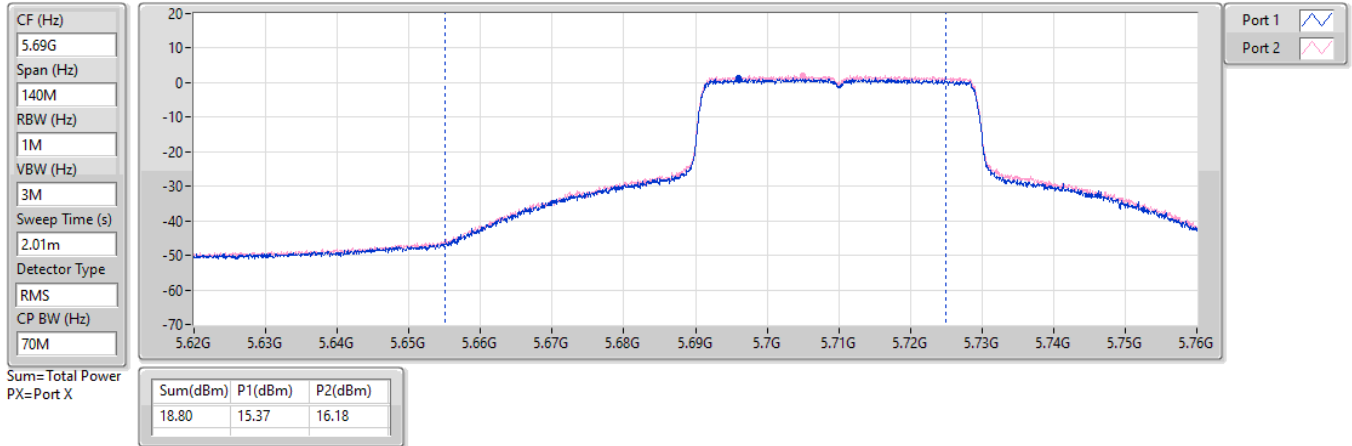


5.47-5.725GHz_802.11be EHT80_Nss2,(MCS0)_2TX

AV Power

5690MHz Straddle 5.47-5.725GHz_TX

20/05/2025

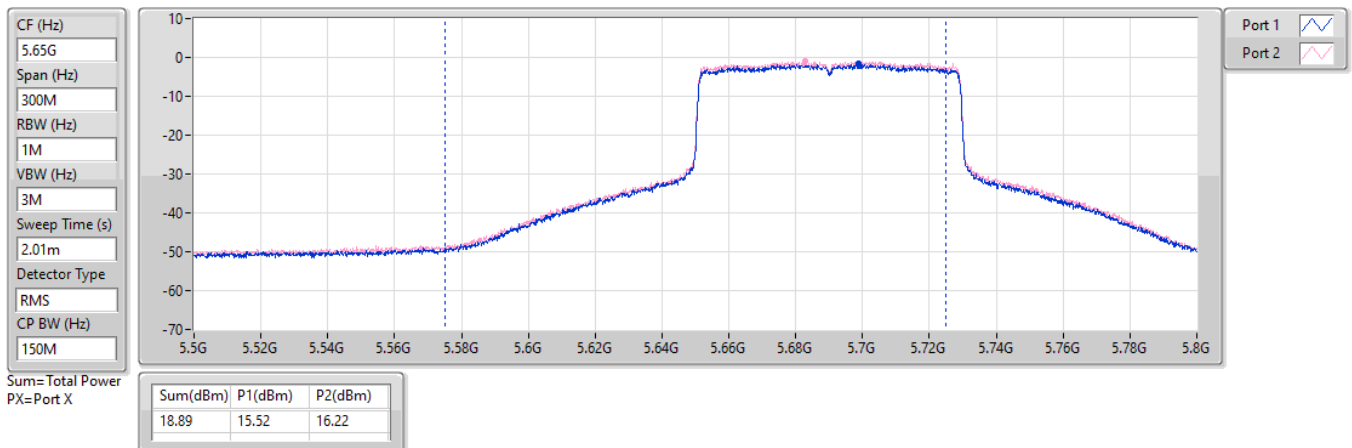



**Average Power_Non-Beamforming_
Radio 3_1T1S_Dipole_Indoor**

Appendix C.8

Summary

Mode	Total Power (dBm)	Total Power (W)
5.15-5.25GHz	-	-
802.11a_Nss1,(6Mbps)_1TX	19.33	0.08570
802.11be EHT20_Nss1,(MCS0)_1TX	19.24	0.08395
802.11be EHT40_Nss1,(MCS0)_1TX	19.16	0.08241
802.11be EHT80_Nss1,(MCS0)_1TX	18.89	0.07745
5.25-5.35GHz	-	-
802.11a_Nss1,(6Mbps)_1TX	18.62	0.07278
802.11be EHT20_Nss1,(MCS0)_1TX	18.88	0.07727
802.11be EHT40_Nss1,(MCS0)_1TX	18.68	0.07379
802.11be EHT80_Nss1,(MCS0)_1TX	18.29	0.06745



Average Power_Non-Beamforming_ Radio 3_1T1S_Dipole_Indoor

Appendix C.8

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Total Power (dBm)	Power Limit (dBm)
802.11a_Nss1,(6Mbps)_1TX	-	-	-	-	-
5180MHz	Pass	3.86	19.33	19.33	30.00
5200MHz	Pass	3.86	18.57	18.57	30.00
5240MHz	Pass	3.86	17.91	17.91	30.00
5260MHz	Pass	3.36	17.91	17.91	23.98
5300MHz	Pass	3.36	18.62	18.62	23.98
5320MHz	Pass	3.36	17.99	17.99	23.98
802.11be EHT20_Nss1,(MCS0)_1TX	-	-	-	-	-
5180MHz	Pass	3.86	19.24	19.24	30.00
5200MHz	Pass	3.86	18.89	18.89	30.00
5240MHz	Pass	3.86	18.06	18.06	30.00
5260MHz	Pass	3.36	18.08	18.08	23.98
5300MHz	Pass	3.36	18.88	18.88	23.98
5320MHz	Pass	3.36	18.00	18.00	23.98
802.11be EHT40_Nss1,(MCS0)_1TX	-	-	-	-	-
5190MHz	Pass	3.86	19.16	19.16	30.00
5230MHz	Pass	3.86	18.28	18.28	30.00
5270MHz	Pass	3.36	18.58	18.58	23.98
5310MHz	Pass	3.36	18.68	18.68	23.98
802.11be EHT80_Nss1,(MCS0)_1TX	-	-	-	-	-
5210MHz	Pass	3.86	18.89	18.89	30.00
5290MHz	Pass	3.36	18.29	18.29	23.98

DG = Directional Gain; Port X = Port X output power
Inf = There's no restriction for the limit.



**Average Power_Non-Beamforming_
Radio 3_2T1S_Dipole_Indoor**

Appendix C.9

Summary

Mode	Total Power (dBm)	Total Power (W)
5.15-5.25GHz	-	-
802.11a_Nss1,(6Mbps)_2TX	22.27	0.16866
802.11be EHT20_Nss1,(MCS0)_2TX	22.42	0.17458
802.11be EHT40_Nss1,(MCS0)_2TX	21.60	0.14454
802.11be EHT80_Nss1,(MCS0)_2TX	20.74	0.11858
5.25-5.35GHz	-	-
802.11a_Nss1,(6Mbps)_2TX	21.82	0.15205
802.11be EHT20_Nss1,(MCS0)_2TX	21.92	0.15560
802.11be EHT40_Nss1,(MCS0)_2TX	21.72	0.14859
802.11be EHT80_Nss1,(MCS0)_2TX	21.22	0.13243



Average Power_Non-Beamforming_ Radio 3_2T1S_Dipole_Indoor

Appendix C.9

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Total Power (dBm)	Power Limit (dBm)
802.11a_Nss1,(6Mbps)_2TX	-	-	-	-	-	-
5180MHz	Pass	3.86	19.12	19.40	22.27	30.00
5200MHz	Pass	3.86	18.85	18.94	21.91	30.00
5240MHz	Pass	3.86	17.86	17.94	20.91	30.00
5260MHz	Pass	3.36	17.90	18.09	21.01	23.98
5300MHz	Pass	3.36	18.62	18.99	21.82	23.98
5320MHz	Pass	3.36	17.87	18.40	21.15	23.98
802.11be EHT20_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5180MHz	Pass	3.86	19.28	19.54	22.42	30.00
5200MHz	Pass	3.86	18.98	19.11	22.06	30.00
5240MHz	Pass	3.86	18.07	18.08	21.09	30.00
5260MHz	Pass	3.36	18.10	18.04	21.08	23.98
5300MHz	Pass	3.36	18.83	18.98	21.92	23.98
5320MHz	Pass	3.36	17.98	18.54	21.28	23.98
802.11be EHT40_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5190MHz	Pass	3.86	18.61	18.57	21.60	30.00
5230MHz	Pass	3.86	18.36	18.36	21.37	30.00
5270MHz	Pass	3.36	18.70	18.39	21.56	23.98
5310MHz	Pass	3.36	18.70	18.71	21.72	23.98
802.11be EHT80_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5210MHz	Pass	3.86	17.63	17.82	20.74	30.00
5290MHz	Pass	3.36	18.18	18.24	21.22	23.98

DG = Directional Gain; Port X = Port X output power
Inf = There's no restriction for the limit.



**Average Power_Non-Beamforming_
Radio 3_2T2S_Dipole_Indoor**

Appendix C.10

Summary

Mode	Total Power (dBm)	Total Power (W)
5.15-5.25GHz	-	-
802.11be EHT20_Nss2,(MCS0)_2TX	22.27	0.16866
802.11be EHT40_Nss2,(MCS0)_2TX	21.36	0.13677
802.11be EHT80_Nss2,(MCS0)_2TX	20.99	0.12560
5.25-5.35GHz	-	-
802.11be EHT20_Nss2,(MCS0)_2TX	21.80	0.15136
802.11be EHT40_Nss2,(MCS0)_2TX	21.60	0.14454
802.11be EHT80_Nss2,(MCS0)_2TX	21.04	0.12706



**Average Power_Non-Beamforming_
Radio 3_2T2S_Dipole_Indoor**

Appendix C.10

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Total Power (dBm)	Power Limit (dBm)
802.11be EHT20_Nss2,(MCS0)_2TX	-	-	-	-	-	-
5180MHz	Pass	3.86	19.17	19.35	22.27	30.00
5200MHz	Pass	3.86	18.67	18.93	21.81	30.00
5240MHz	Pass	3.86	18.01	18.00	21.02	30.00
5260MHz	Pass	3.36	17.91	17.94	20.94	23.98
5300MHz	Pass	3.36	18.72	18.86	21.80	23.98
5320MHz	Pass	3.36	17.90	18.36	21.15	23.98
802.11be EHT40_Nss2,(MCS0)_2TX	-	-	-	-	-	-
5190MHz	Pass	3.86	18.22	18.47	21.36	30.00
5230MHz	Pass	3.86	18.22	18.19	21.22	30.00
5270MHz	Pass	3.36	18.46	18.28	21.38	23.98
5310MHz	Pass	3.36	18.59	18.58	21.60	23.98
802.11be EHT80_Nss2,(MCS0)_2TX	-	-	-	-	-	-
5210MHz	Pass	3.86	17.85	18.11	20.99	30.00
5290MHz	Pass	3.36	17.98	18.08	21.04	23.98

DG = Directional Gain; Port X = Port X output power
Inf = There's no restriction for the limit.



**Average Power_Non-Beamforming_
Radio 3_1T1S_Patch_Indoor**

Appendix C.11

Summary

Mode	Total Power (dBm)	Total Power (W)
5.15-5.25GHz	-	-
802.11a_Nss1,(6Mbps)_1TX	19.33	0.08570
802.11be EHT20_Nss1,(MCS0)_1TX	19.24	0.08395
802.11be EHT40_Nss1,(MCS0)_1TX	18.28	0.06730
802.11be EHT80_Nss1,(MCS0)_1TX	16.17	0.04140
5.25-5.35GHz	-	-
802.11a_Nss1,(6Mbps)_1TX	18.62	0.07278
802.11be EHT20_Nss1,(MCS0)_1TX	18.54	0.07145
802.11be EHT40_Nss1,(MCS0)_1TX	18.68	0.07379
802.11be EHT80_Nss1,(MCS0)_1TX	17.41	0.05508



Average Power_Non-Beamforming_ Radio 3_1T1S_Patch_Indoor

Appendix C.11

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Total Power (dBm)	Power Limit (dBm)
802.11a_Nss1,(6Mbps)_1TX	-	-	-	-	-
5180MHz	Pass	10.44	19.33	19.33	25.56
5200MHz	Pass	10.44	18.57	18.57	25.56
5240MHz	Pass	10.44	17.91	17.91	25.56
5260MHz	Pass	10.71	17.91	17.91	19.27
5300MHz	Pass	10.71	18.62	18.62	19.27
5320MHz	Pass	10.71	17.99	17.99	19.27
802.11be EHT20_Nss1,(MCS0)_1TX	-	-	-	-	-
5180MHz	Pass	10.44	19.24	19.24	25.56
5200MHz	Pass	10.44	18.89	18.89	25.56
5240MHz	Pass	10.44	18.06	18.06	25.56
5260MHz	Pass	10.71	18.08	18.08	19.27
5300MHz	Pass	10.71	18.54	18.54	19.27
5320MHz	Pass	10.71	18.00	18.00	19.27
802.11be EHT40_Nss1,(MCS0)_1TX	-	-	-	-	-
5190MHz	Pass	10.44	17.16	17.16	25.56
5230MHz	Pass	10.44	18.28	18.28	25.56
5270MHz	Pass	10.71	18.58	18.58	19.27
5310MHz	Pass	10.71	18.68	18.68	19.27
802.11be EHT80_Nss1,(MCS0)_1TX	-	-	-	-	-
5210MHz	Pass	10.44	16.17	16.17	25.56
5290MHz	Pass	10.71	17.41	17.41	19.27

DG = Directional Gain; Port X = Port X output power
Inf = There's no restriction for the limit.



**Average Power_Non-Beamforming_
Radio 3_2T1S_Patch_Indoor**

Appendix C.12

Summary

Mode	Total Power (dBm)	Total Power (W)
5.15-5.25GHz	-	-
802.11a_Nss1,(6Mbps)_2TX	22.13	0.16331
802.11be EHT20_Nss1,(MCS0)_2TX	22.42	0.17458
802.11be EHT40_Nss1,(MCS0)_2TX	21.37	0.13709
802.11be EHT80_Nss1,(MCS0)_2TX	18.76	0.07516
5.25-5.35GHz	-	-
802.11a_Nss1,(6Mbps)_2TX	16.62	0.04592
802.11be EHT20_Nss1,(MCS0)_2TX	17.13	0.05164
802.11be EHT40_Nss1,(MCS0)_2TX	18.69	0.07396
802.11be EHT80_Nss1,(MCS0)_2TX	18.51	0.07096



Average Power_Non-Beamforming_ Radio 3_2T1S_Patch_Indoor

Appendix C.12

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Total Power (dBm)	Power Limit (dBm)
802.11a_Nss1,(6Mbps)_2TX	-	-	-	-	-	-
5180MHz	Pass	10.44	18.89	19.34	22.13	25.56
5200MHz	Pass	10.44	18.85	18.94	21.91	25.56
5240MHz	Pass	10.44	17.86	17.94	20.91	25.56
5260MHz	Pass	10.71	13.59	13.62	16.62	19.27
5300MHz	Pass	10.71	13.39	13.47	16.44	19.27
5320MHz	Pass	10.71	12.97	13.53	16.27	19.27
802.11be EHT20_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5180MHz	Pass	10.44	19.28	19.54	22.42	25.56
5200MHz	Pass	10.44	18.98	19.11	22.06	25.56
5240MHz	Pass	10.44	18.07	18.08	21.09	25.56
5260MHz	Pass	10.71	13.93	14.14	17.05	19.27
5300MHz	Pass	10.71	14.01	14.23	17.13	19.27
5320MHz	Pass	10.71	13.73	14.16	16.96	19.27
802.11be EHT40_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5190MHz	Pass	10.44	17.07	17.12	20.11	25.56
5230MHz	Pass	10.44	18.36	18.36	21.37	25.56
5270MHz	Pass	10.71	15.75	15.60	18.69	19.27
5310MHz	Pass	10.71	15.67	15.57	18.63	19.27
802.11be EHT80_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5210MHz	Pass	10.44	15.61	15.89	18.76	25.56
5290MHz	Pass	10.71	15.46	15.54	18.51	19.27

DG = Directional Gain; Port X = Port X output power
Inf = There's no restriction for the limit.



**Average Power_Non-Beamforming_
Radio 3_2T2S_Patch_Indoor**

Appendix C.13

Summary

Mode	Total Power (dBm)	Total Power (W)
5.15-5.25GHz	-	-
802.11be EHT20_Nss2,(MCS0)_2TX	22.27	0.16866
802.11be EHT40_Nss2,(MCS0)_2TX	21.22	0.13243
802.11be EHT80_Nss2,(MCS0)_2TX	18.63	0.07295
5.25-5.35GHz	-	-
802.11be EHT20_Nss2,(MCS0)_2TX	18.75	0.07499
802.11be EHT40_Nss2,(MCS0)_2TX	18.74	0.07482
802.11be EHT80_Nss2,(MCS0)_2TX	18.52	0.07112



**Average Power_Non-Beamforming_
Radio 3_2T2S_Patch_Indoor**

Appendix C.13

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Total Power (dBm)	Power Limit (dBm)
802.11be EHT20_Nss2,(MCS0)_2TX	-	-	-	-	-	-
5180MHz	Pass	10.44	19.17	19.35	22.27	25.56
5200MHz	Pass	10.44	18.67	18.93	21.81	25.56
5240MHz	Pass	10.44	18.01	18.00	21.02	25.56
5260MHz	Pass	10.71	15.65	15.82	18.75	19.27
5300MHz	Pass	10.71	15.61	15.74	18.69	19.27
5320MHz	Pass	10.71	15.50	15.95	18.74	19.27
802.11be EHT40_Nss2,(MCS0)_2TX	-	-	-	-	-	-
5190MHz	Pass	10.44	16.97	16.98	19.99	25.56
5230MHz	Pass	10.44	18.22	18.19	21.22	25.56
5270MHz	Pass	10.71	15.88	15.57	18.74	19.27
5310MHz	Pass	10.71	15.67	15.70	18.70	19.27
802.11be EHT80_Nss2,(MCS0)_2TX	-	-	-	-	-	-
5210MHz	Pass	10.44	15.52	15.72	18.63	25.56
5290MHz	Pass	10.71	15.48	15.53	18.52	19.27

DG = Directional Gain; Port X = Port X output power
Inf = There's no restriction for the limit.



**Average Power _Non-Beamforming_
Radio 1_Scan_Outdoor**

Appendix C.14

Summary

Mode	Total Power (dBm)	Total Power (W)
5.15-5.25GHz	-	-
a20_Nss1,(6Mbps)_1TX	17.60	0.05754
a40_Nss1,(6Mbps)_1TX	15.69	0.03707
a80_Nss1,(6Mbps)_1TX	12.22	0.01667
a160_Nss1,(6Mbps)_1TX	8.56	0.00718
5.25-5.35GHz	-	-
a20_Nss1,(6Mbps)_1TX	17.91	0.06180
a40_Nss1,(6Mbps)_1TX	15.27	0.03365
a80_Nss1,(6Mbps)_1TX	12.07	0.01611
a160_Nss1,(6Mbps)_1TX	7.89	0.00615
5.47-5.725GHz	-	-
a20_Nss1,(6Mbps)_1TX	17.76	0.05970
a40_Nss1,(6Mbps)_1TX	16.17	0.04140
a80_Nss1,(6Mbps)_1TX	17.87	0.06124
a160_Nss1,(6Mbps)_1TX	10.69	0.01172
5.725-5.85GHz	-	-
a20_Nss1,(6Mbps)_1TX	18.05	0.06383
a40_Nss1,(6Mbps)_1TX	17.77	0.05984
a80_Nss1,(6Mbps)_1TX	16.95	0.04955



Average Power Non-Beamforming Radio 1_Scan_Outdoor

Appendix C.14

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Total Power (dBm)	Power Limit (dBm)
a20_Nss1,(6Mbps)_1TX	-	-	-	-	-
5180MHz	Pass	2.89	14.95	14.95	30.00
5200MHz	Pass	2.89	17.60	17.60	30.00
5240MHz	Pass	2.89	17.57	17.57	30.00
5260MHz	Pass	3.35	17.73	17.73	23.98
5300MHz	Pass	3.35	17.91	17.91	23.98
5320MHz	Pass	3.35	14.43	14.43	23.98
5500MHz	Pass	4.93	15.65	15.65	23.98
5580MHz	Pass	4.93	17.76	17.76	23.98
5700MHz	Pass	4.93	15.01	15.01	23.98
5720MHz Straddle 5.47-5.725GHz	Pass	4.93	17.51	17.51	23.98
5720MHz Straddle 5.725-5.85GHz	Pass	3.56	11.58	11.58	30.00
5745MHz	Pass	3.56	18.04	18.04	30.00
5785MHz	Pass	3.56	18.01	18.01	30.00
5825MHz	Pass	3.56	18.05	18.05	30.00
a40_Nss1,(6Mbps)_1TX	-	-	-	-	-
5190MHz	Pass	2.89	11.29	11.29	30.00
5230MHz	Pass	2.89	15.69	15.69	30.00
5270MHz	Pass	3.35	15.27	15.27	23.98
5310MHz	Pass	3.35	11.28	11.28	23.98
5510MHz	Pass	4.93	10.71	10.71	23.98
5550MHz	Pass	4.93	15.84	15.84	23.98
5670MHz	Pass	4.93	13.89	13.89	23.98
5710MHz Straddle 5.47-5.725GHz	Pass	4.93	16.17	16.17	23.98
5710MHz Straddle 5.725-5.85GHz	Pass	3.56	6.52	6.52	30.00
5755MHz	Pass	3.56	17.77	17.77	30.00
5795MHz	Pass	3.56	17.64	17.64	30.00
a80_Nss1,(6Mbps)_1TX	-	-	-	-	-
5210MHz	Pass	2.89	12.22	12.22	30.00
5290MHz	Pass	3.35	12.07	12.07	23.98
5530MHz	Pass	4.93	11.51	11.51	23.98
5610MHz	Pass	4.93	15.69	15.69	23.98
5690MHz Straddle 5.47-5.725GHz	Pass	4.93	17.87	17.87	23.98
5690MHz Straddle 5.725-5.85GHz	Pass	3.56	4.54	4.54	30.00
5775MHz	Pass	3.56	16.95	16.95	30.00
a160_Nss1,(6Mbps)_1TX	-	-	-	-	-
5250MHz Straddle 5.15-5.25GHz	Pass	2.89	8.56	8.56	30.00
5250MHz Straddle 5.25-5.35GHz	Pass	3.35	7.89	7.89	23.98
5570MHz	Pass	4.93	10.69	10.69	23.98


DG = Directional Gain; Port X = Port X output power
Inf = There's no restriction for the limit.

5.15-5.25GHz_a160_Nss1,(6Mbps)_1TX

AV Power

5250MHz Straddle 5.15-5.25GHz_TX

28/05/2025

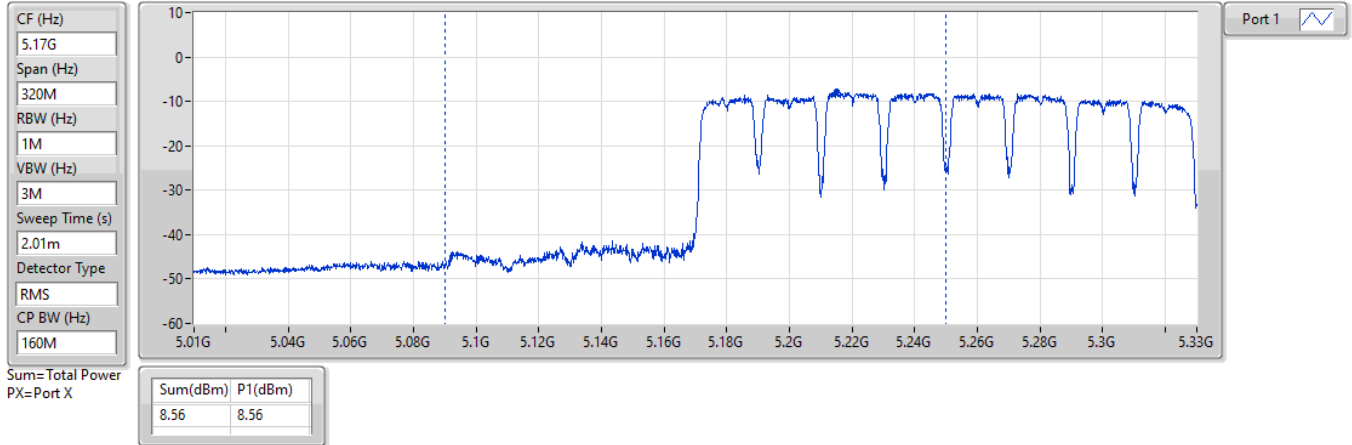


5.25-5.35GHz_a160_Nss1,(6Mbps)_1TX

AV Power

5250MHz Straddle 5.25-5.35GHz_TX

28/05/2025

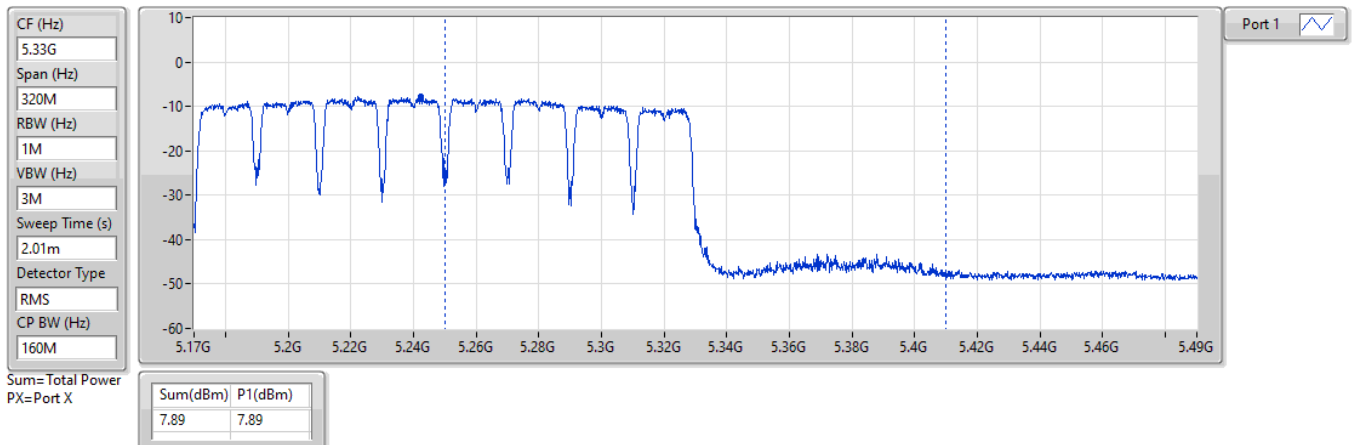


5.47-5.725GHz_a40_Nss1,(6Mbps)_1TX

AV Power

5710MHz Straddle 5.47-5.725GHz_TX

28/05/2025

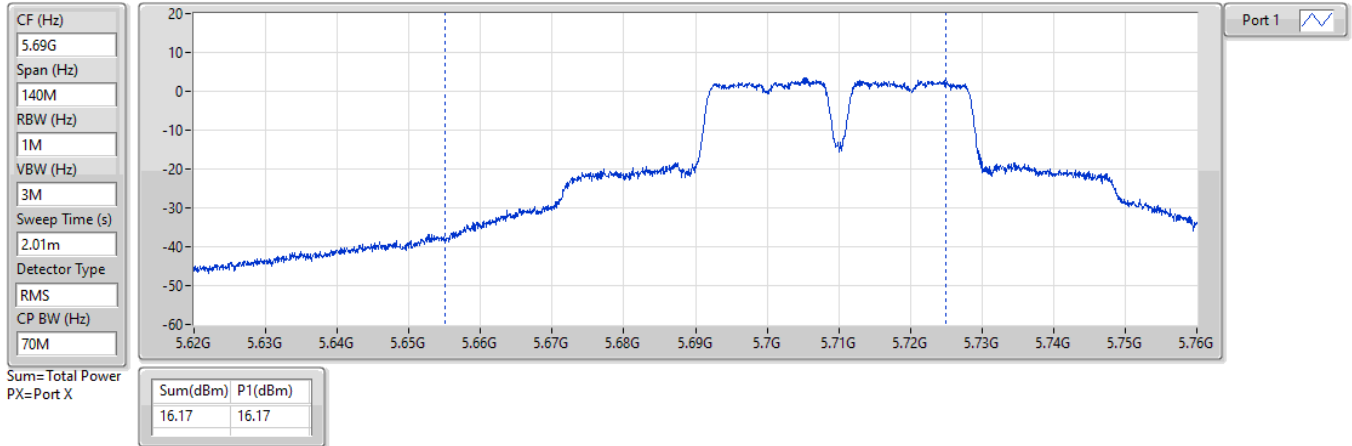


5.47-5.725GHz_a80_Nss1,(6Mbps)_1TX

AV Power

5690MHz Straddle 5.47-5.725GHz_TX

28/05/2025

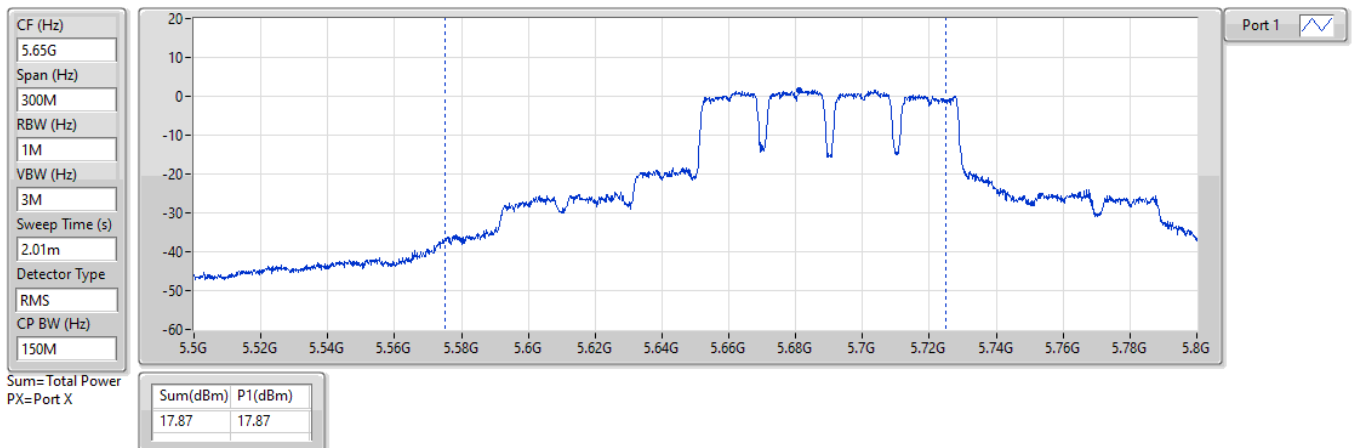



**Average Power_Non-Beamforming_
Radio 2_1T1S_Dipole_Outdoor_Peak Gain**

Appendix C.15

Summary

Mode	Total Power (dBm)	Total Power (W)
5.15-5.25GHz	-	-
802.11a_Nss1,(6Mbps)_1TX	16.86	0.04853
802.11be EHT20_Nss1,(MCS0)_1TX	16.81	0.04797
802.11be EHT40_Nss1,(MCS0)_1TX	16.81	0.04797
802.11be EHT80_Nss1,(MCS0)_1TX	16.69	0.04667
802.11be EHT160_Nss1,(MCS0)_1TX	16.21	0.04178
5.25-5.35GHz	-	-
802.11a_Nss1,(6Mbps)_1TX	17.49	0.05610
802.11be EHT20_Nss1,(MCS0)_1TX	17.91	0.06180
802.11be EHT40_Nss1,(MCS0)_1TX	18.26	0.06699
802.11be EHT80_Nss1,(MCS0)_1TX	17.95	0.06237
802.11be EHT160_Nss1,(MCS0)_1TX	15.78	0.03784
5.47-5.725GHz	-	-
802.11a_Nss1,(6Mbps)_1TX	17.47	0.05585
802.11be EHT20_Nss1,(MCS0)_1TX	17.64	0.05808
802.11be EHT40_Nss1,(MCS0)_1TX	18.21	0.06622
802.11be EHT80_Nss1,(MCS0)_1TX	17.73	0.05929
802.11be EHT160_Nss1,(MCS0)_1TX	16.72	0.04699
5.725-5.85GHz	-	-
802.11a_Nss1,(6Mbps)_1TX	18.51	0.07096
802.11be EHT20_Nss1,(MCS0)_1TX	18.61	0.07261
802.11be EHT40_Nss1,(MCS0)_1TX	18.03	0.06353
802.11be EHT80_Nss1,(MCS0)_1TX	17.63	0.05794



**Average Power Non-Beamforming
Radio 2 1T1S Dipole Outdoor Peak Gain**

Appendix C.15

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Total Power (dBm)	Power Limit (dBm)
802.11a_Nss1,(6Mbps)_1TX	-	-	-	-	-
5180MHz	Pass	3.61	16.78	16.78	30.00
5200MHz	Pass	3.61	16.84	16.84	30.00
5240MHz	Pass	3.61	16.86	16.86	30.00
5260MHz	Pass	3.17	17.49	17.49	23.98
5300MHz	Pass	3.17	17.46	17.46	23.98
5320MHz	Pass	3.17	17.30	17.30	23.98
5500MHz	Pass	3.19	17.47	17.47	23.98
5580MHz	Pass	3.19	17.35	17.35	23.98
5700MHz	Pass	3.19	16.83	16.83	23.98
5720MHz Straddle 5.47-5.725GHz	Pass	3.19	16.45	16.45	22.87
5720MHz Straddle 5.725-5.85GHz	Pass	3.42	10.39	10.39	30.00
5745MHz	Pass	3.42	18.51	18.51	30.00
5785MHz	Pass	3.42	17.63	17.63	30.00
5825MHz	Pass	3.42	16.70	16.70	30.00
802.11be EHT20_Nss1,(MCS0)_1TX	-	-	-	-	-
5180MHz	Pass	3.61	16.81	16.81	30.00
5200MHz	Pass	3.61	16.78	16.78	30.00
5240MHz	Pass	3.61	16.60	16.60	30.00
5260MHz	Pass	3.17	17.91	17.91	23.98
5300MHz	Pass	3.17	17.60	17.60	23.98
5320MHz	Pass	3.17	17.38	17.38	23.98
5500MHz	Pass	3.19	17.64	17.64	23.98
5580MHz	Pass	3.19	17.43	17.43	23.98
5700MHz	Pass	3.19	15.38	15.38	23.98
5720MHz Straddle 5.47-5.725GHz	Pass	3.19	16.69	16.69	23.03
5720MHz Straddle 5.725-5.85GHz	Pass	3.42	11.53	11.53	30.00
5745MHz	Pass	3.42	18.61	18.61	30.00
5785MHz	Pass	3.42	17.86	17.86	30.00
5825MHz	Pass	3.42	16.94	16.94	30.00
802.11be EHT40_Nss1,(MCS0)_1TX	-	-	-	-	-
5190MHz	Pass	3.61	16.80	16.80	30.00
5230MHz	Pass	3.61	16.81	16.81	30.00
5270MHz	Pass	3.17	18.26	18.26	23.98
5310MHz	Pass	3.17	17.60	17.60	23.98
5510MHz	Pass	3.19	18.15	18.15	23.98
5550MHz	Pass	3.19	18.04	18.04	23.98
5670MHz	Pass	3.19	18.21	18.21	23.98
5710MHz Straddle 5.47-5.725GHz	Pass	3.19	18.08	18.08	23.98
5710MHz Straddle 5.725-5.85GHz	Pass	3.42	8.61	8.61	30.00
5755MHz	Pass	3.42	18.03	18.03	30.00
5795MHz	Pass	3.42	17.05	17.05	30.00
802.11be EHT80_Nss1,(MCS0)_1TX	-	-	-	-	-
5210MHz	Pass	3.61	16.69	16.69	30.00
5290MHz	Pass	3.17	17.95	17.95	23.98
5530MHz	Pass	3.19	17.66	17.66	23.98
5610MHz	Pass	3.19	17.73	17.73	23.98
5690MHz Straddle 5.47-5.725GHz	Pass	3.19	17.66	17.66	23.98
5690MHz Straddle 5.725-5.85GHz	Pass	3.42	4.38	4.38	30.00
5775MHz	Pass	3.42	17.63	17.63	30.00
802.11be EHT160_Nss1,(MCS0)_1TX	-	-	-	-	-
5250MHz Straddle 5.15-5.25GHz	Pass	3.61	16.21	16.21	30.00
5250MHz Straddle 5.25-5.35GHz	Pass	3.17	15.78	15.78	23.98
5570MHz	Pass	3.19	16.72	16.72	23.98


DG = Directional Gain; Port X = Port X output power
Inf = There's no restriction for the limit.

5.15-5.25GHz_802.11be EHT160_Nss1,(MCS0)_1TX

AV Power

5250MHz Straddle 5.15-5.25GHz_TX

20/05/2025

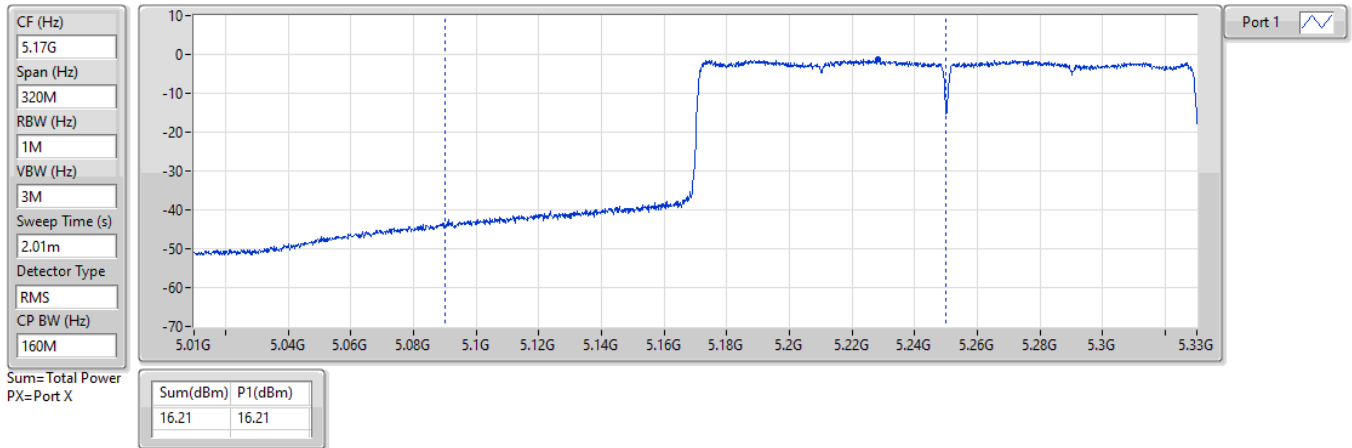


5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0)_1TX

AV Power

5250MHz Straddle 5.25-5.35GHz_TX

20/05/2025

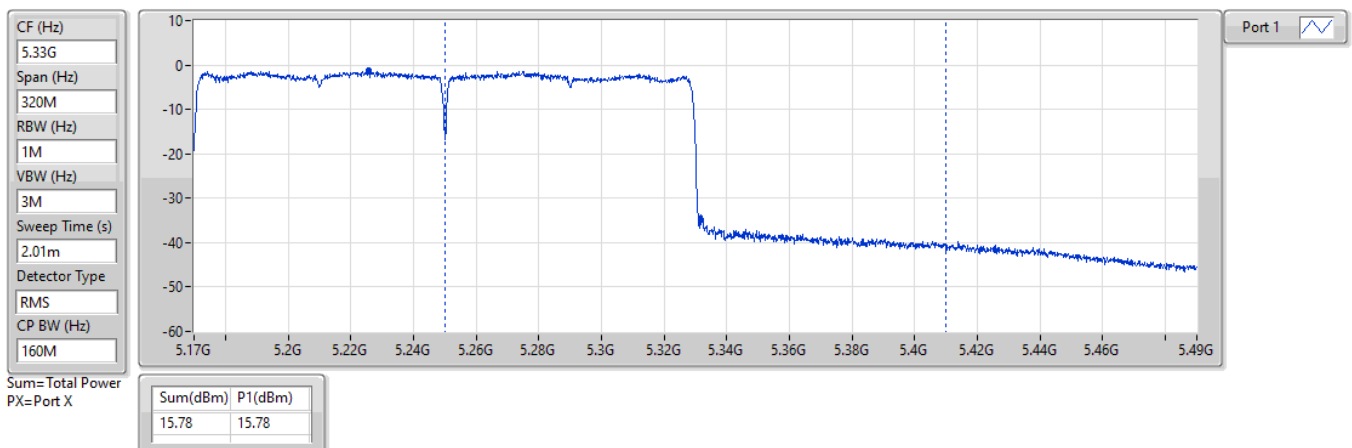



**Average Power_Non-Beamforming_
Radio 2_2T1S_Dipole_Outdoor_Peak Gain**

Appendix C.16

Summary

Mode	Total Power (dBm)	Total Power (W)
5.15-5.25GHz	-	-
802.11a_Nss1,(6Mbps)_2TX	16.61	0.04581
802.11be EHT20_Nss1,(MCS0)_2TX	16.61	0.04581
802.11be EHT40_Nss1,(MCS0)_2TX	16.52	0.04487
802.11be EHT80_Nss1,(MCS0)_2TX	16.56	0.04529
802.11be EHT160_Nss1,(MCS0)_2TX	16.44	0.04406
5.25-5.35GHz	-	-
802.11a_Nss1,(6Mbps)_2TX	21.13	0.12972
802.11be EHT20_Nss1,(MCS0)_2TX	21.19	0.13152
802.11be EHT40_Nss1,(MCS0)_2TX	21.51	0.14158
802.11be EHT80_Nss1,(MCS0)_2TX	21.10	0.12882
802.11be EHT160_Nss1,(MCS0)_2TX	16.65	0.04624
5.47-5.725GHz	-	-
802.11a_Nss1,(6Mbps)_2TX	20.91	0.12331
802.11be EHT20_Nss1,(MCS0)_2TX	21.06	0.12764
802.11be EHT40_Nss1,(MCS0)_2TX	21.38	0.13740
802.11be EHT80_Nss1,(MCS0)_2TX	20.92	0.12359
802.11be EHT160_Nss1,(MCS0)_2TX	18.33	0.06808
5.725-5.85GHz	-	-
802.11a_Nss1,(6Mbps)_2TX	21.82	0.15205
802.11be EHT20_Nss1,(MCS0)_2TX	22.01	0.15885
802.11be EHT40_Nss1,(MCS0)_2TX	21.53	0.14223
802.11be EHT80_Nss1,(MCS0)_2TX	21.06	0.12764



**Average Power_Non-Beamforming_
Radio 2_2T1S_Dipole_Outdoor_Peak Gain**

Appendix C.16

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Total Power (dBm)	Power Limit (dBm)
802.11a_Nss1,(6Mbps)_2TX	-	-	-	-	-	-
5180MHz	Pass	3.86	13.28	13.65	16.48	30.00
5200MHz	Pass	3.86	13.52	13.63	16.59	30.00
5240MHz	Pass	3.86	13.53	13.66	16.61	30.00
5260MHz	Pass	3.26	17.64	18.55	21.13	23.98
5300MHz	Pass	3.26	17.31	18.32	20.85	23.98
5320MHz	Pass	3.26	17.27	18.13	20.73	23.98
5500MHz	Pass	3.44	17.55	18.22	20.91	23.98
5580MHz	Pass	3.44	17.19	17.87	20.55	23.98
5700MHz	Pass	3.44	15.10	15.70	18.42	23.98
5720MHz Straddle 5.47-5.725GHz	Pass	3.44	16.30	17.34	19.86	23.03
5720MHz Straddle 5.725-5.85GHz	Pass	3.66	10.33	11.23	13.81	30.00
5745MHz	Pass	3.66	18.36	19.21	21.82	30.00
5785MHz	Pass	3.66	17.71	18.21	20.98	30.00
5825MHz	Pass	3.66	16.69	17.28	20.01	30.00
802.11be EHT20_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5180MHz	Pass	3.86	13.43	13.77	16.61	30.00
5200MHz	Pass	3.86	13.49	13.55	16.53	30.00
5240MHz	Pass	3.86	13.46	13.69	16.59	30.00
5260MHz	Pass	3.26	17.70	18.62	21.19	23.98
5300MHz	Pass	3.26	17.52	18.17	20.87	23.98
5320MHz	Pass	3.26	17.30	18.08	20.72	23.98
5500MHz	Pass	3.44	17.60	18.46	21.06	23.98
5580MHz	Pass	3.44	17.28	17.89	20.61	23.98
5700MHz	Pass	3.44	15.05	15.51	18.30	23.98
5720MHz Straddle 5.47-5.725GHz	Pass	3.44	16.28	17.22	19.79	23.05
5720MHz Straddle 5.725-5.85GHz	Pass	3.66	11.10	12.07	14.62	30.00
5745MHz	Pass	3.66	18.69	19.28	22.01	30.00
5785MHz	Pass	3.66	17.76	17.47	20.63	30.00
5825MHz	Pass	3.66	16.82	17.57	20.22	30.00
802.11be EHT40_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5190MHz	Pass	3.86	13.42	13.49	16.47	30.00
5230MHz	Pass	3.86	13.49	13.52	16.52	30.00
5270MHz	Pass	3.26	17.81	19.09	21.51	23.98
5310MHz	Pass	3.26	18.19	18.65	21.44	23.98
5510MHz	Pass	3.44	17.76	18.66	21.24	23.98
5550MHz	Pass	3.44	17.92	18.78	21.38	23.98
5670MHz	Pass	3.44	17.73	18.45	21.12	23.98
5710MHz Straddle 5.47-5.725GHz	Pass	3.44	17.68	18.51	21.13	23.98
5710MHz Straddle 5.725-5.85GHz	Pass	3.66	8.03	8.96	11.53	30.00
5755MHz	Pass	3.66	17.68	19.23	21.53	30.00
5795MHz	Pass	3.66	16.77	18.11	20.50	30.00
802.11be EHT80_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5210MHz	Pass	3.86	13.39	13.70	16.56	30.00
5290MHz	Pass	3.26	17.70	18.44	21.10	23.98
5530MHz	Pass	3.44	17.66	18.15	20.92	23.98
5610MHz	Pass	3.44	17.50	18.21	20.88	23.98
5690MHz Straddle 5.47-5.725GHz	Pass	3.44	17.27	17.95	20.63	23.98
5690MHz Straddle 5.725-5.85GHz	Pass	3.66	3.93	4.68	7.33	30.00
5775MHz	Pass	3.66	17.55	18.50	21.06	30.00
802.11be EHT160_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5250MHz Straddle 5.15-5.25GHz	Pass	3.86	13.52	13.34	16.44	30.00
5250MHz Straddle 5.25-5.35GHz	Pass	3.26	13.15	14.08	16.65	23.98
5570MHz	Pass	3.44	15.05	15.58	18.33	23.98


DG = Directional Gain; Port X = Port X output power
Inf = There's no restriction for the limit.

5.15-5.25GHz_802.11be EHT160_Nss1,(MCS0)_2TX

AV Power

5250MHz Straddle 5.15-5.25GHz_TX

22/05/2025

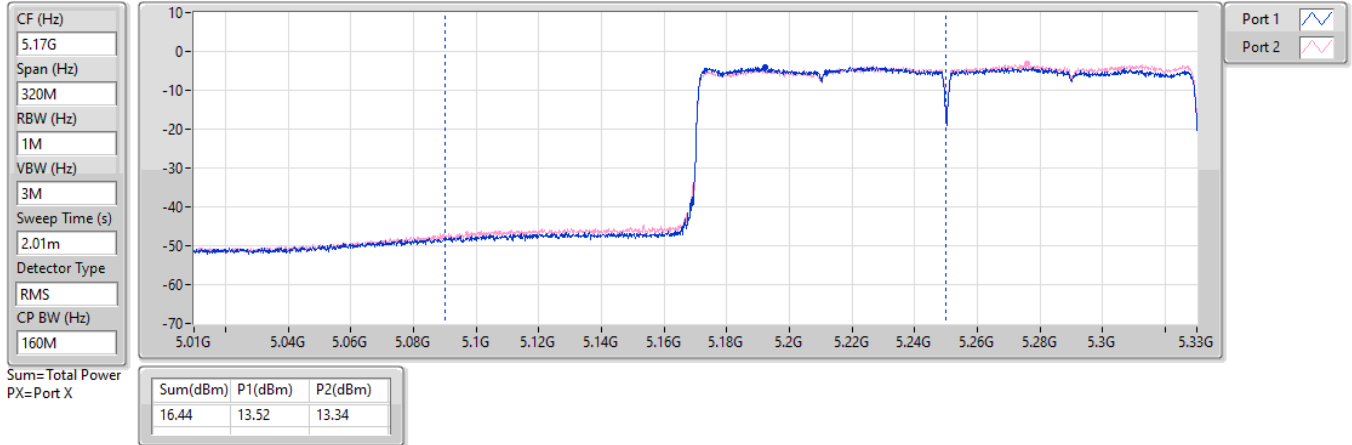


5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0)_2TX

AV Power

5250MHz Straddle 5.25-5.35GHz_TX

22/05/2025

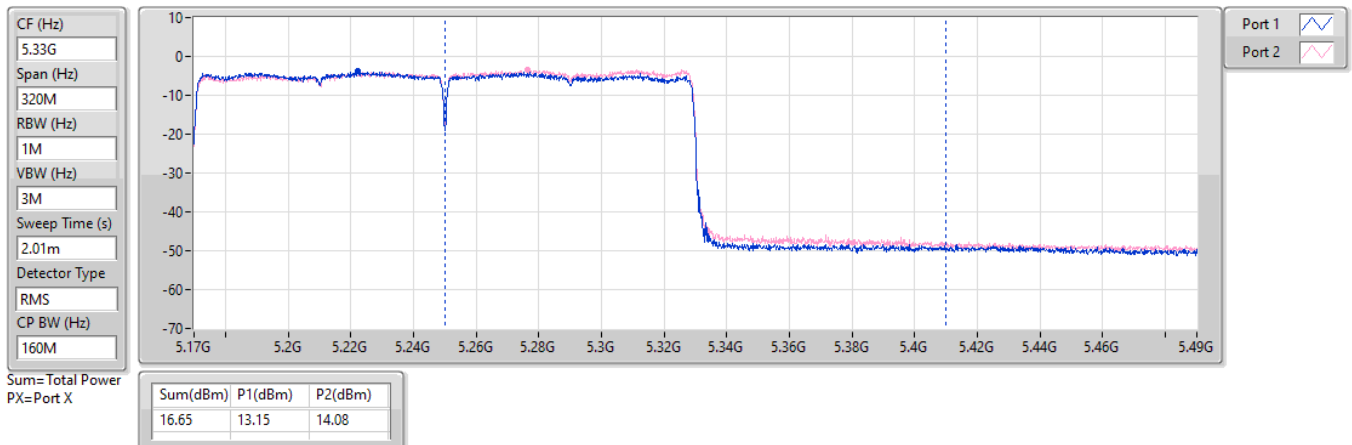



**Average Power_Non-Beamforming_
Radio 2_2T2S_Dipole_Outdoor_Peak Gain**

Appendix C.17

Summary

Mode	Total Power (dBm)	Total Power (W)
5.15-5.25GHz	-	-
802.11be EHT20_Nss2,(MCS0)_2TX	16.62	0.04592
802.11be EHT40_Nss2,(MCS0)_2TX	16.48	0.04446
802.11be EHT80_Nss2,(MCS0)_2TX	16.48	0.04446
802.11be EHT160_Nss2,(MCS0)_2TX	16.53	0.04498
5.25-5.35GHz	-	-
802.11be EHT20_Nss2,(MCS0)_2TX	21.26	0.13366
802.11be EHT40_Nss2,(MCS0)_2TX	21.62	0.14521
802.11be EHT80_Nss2,(MCS0)_2TX	21.07	0.12794
802.11be EHT160_Nss2,(MCS0)_2TX	16.74	0.04721
5.47-5.725GHz	-	-
802.11be EHT20_Nss2,(MCS0)_2TX	20.61	0.11508
802.11be EHT40_Nss2,(MCS0)_2TX	21.53	0.14223
802.11be EHT80_Nss2,(MCS0)_2TX	20.99	0.12560
802.11be EHT160_Nss2,(MCS0)_2TX	17.84	0.06081
5.725-5.85GHz	-	-
802.11be EHT20_Nss2,(MCS0)_2TX	22.05	0.16032
802.11be EHT40_Nss2,(MCS0)_2TX	21.74	0.14928
802.11be EHT80_Nss2,(MCS0)_2TX	21.00	0.12589



Average Power_Non-Beamforming_ Radio 2_2T2S_Dipole_Outdoor_Peak Gain

Appendix C.17

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Total Power (dBm)	Power Limit (dBm)
802.11be EHT20_Nss2,(MCS0)_2TX	-	-	-	-	-	-
5180MHz	Pass	3.86	13.35	13.66	16.52	30.00
5200MHz	Pass	3.86	13.43	13.66	16.56	30.00
5240MHz	Pass	3.86	13.46	13.75	16.62	30.00
5260MHz	Pass	3.26	17.80	18.65	21.26	23.98
5300MHz	Pass	3.26	17.69	18.31	21.02	23.98
5320MHz	Pass	3.26	17.35	18.25	20.83	23.98
5500MHz	Pass	3.44	17.50	17.08	20.31	23.98
5580MHz	Pass	3.44	17.28	17.89	20.61	23.98
5700MHz	Pass	3.44	15.46	16.07	18.79	23.98
5720MHz Straddle 5.47-5.725GHz	Pass	3.44	16.37	17.34	19.89	22.92
5720MHz Straddle 5.725-5.85GHz	Pass	3.66	11.21	12.25	14.77	30.00
5745MHz	Pass	3.66	18.59	19.44	22.05	30.00
5785MHz	Pass	3.66	17.82	18.45	21.16	30.00
5825MHz	Pass	3.66	16.77	17.11	19.95	30.00
802.11be EHT40_Nss2,(MCS0)_2TX	-	-	-	-	-	-
5190MHz	Pass	3.86	13.44	13.47	16.47	30.00
5230MHz	Pass	3.86	13.50	13.43	16.48	30.00
5270MHz	Pass	3.26	18.12	19.05	21.62	23.98
5310MHz	Pass	3.26	17.88	18.58	21.25	23.98
5510MHz	Pass	3.44	17.94	19.00	21.51	23.98
5550MHz	Pass	3.44	18.09	18.91	21.53	23.98
5670MHz	Pass	3.44	18.08	18.64	21.38	23.98
5710MHz Straddle 5.47-5.725GHz	Pass	3.44	17.87	18.68	21.30	23.98
5710MHz Straddle 5.725-5.85GHz	Pass	3.66	8.09	9.15	11.66	30.00
5755MHz	Pass	3.66	18.12	19.26	21.74	30.00
5795MHz	Pass	3.66	17.07	18.17	20.67	30.00
802.11be EHT80_Nss2,(MCS0)_2TX	-	-	-	-	-	-
5210MHz	Pass	3.86	13.29	13.64	16.48	30.00
5290MHz	Pass	3.26	17.74	18.35	21.07	23.98
5530MHz	Pass	3.44	17.56	18.37	20.99	23.98
5610MHz	Pass	3.44	17.51	18.22	20.89	23.98
5690MHz Straddle 5.47-5.725GHz	Pass	3.44	17.24	17.99	20.64	23.98
5690MHz Straddle 5.725-5.85GHz	Pass	3.66	3.95	4.78	7.40	30.00
5775MHz	Pass	3.66	17.52	18.41	21.00	30.00
802.11be EHT160_Nss2,(MCS0)_2TX	-	-	-	-	-	-
5250MHz Straddle 5.15-5.25GHz	Pass	3.86	13.59	13.44	16.53	30.00
5250MHz Straddle 5.25-5.35GHz	Pass	3.26	13.28	14.14	16.74	23.98
5570MHz	Pass	3.44	14.63	15.03	17.84	23.98

DG = Directional Gain; Port X = Port X output power
Inf = There's no restriction for the limit.




5.15-5.25GHz_802.11be EHT160_Nss2,(MCS0)_2TX

AV Power

5250MHz Straddle 5.15-5.25GHz_TX

22/05/2025

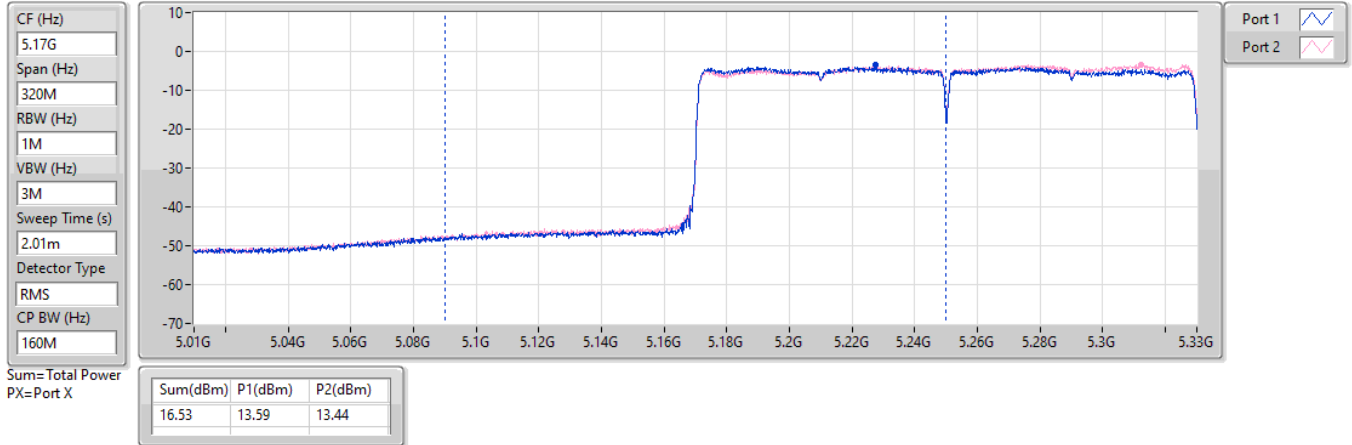


5.25-5.35GHz_802.11be EHT160_Nss2,(MCS0)_2TX

AV Power

5250MHz Straddle 5.25-5.35GHz_TX

22/05/2025

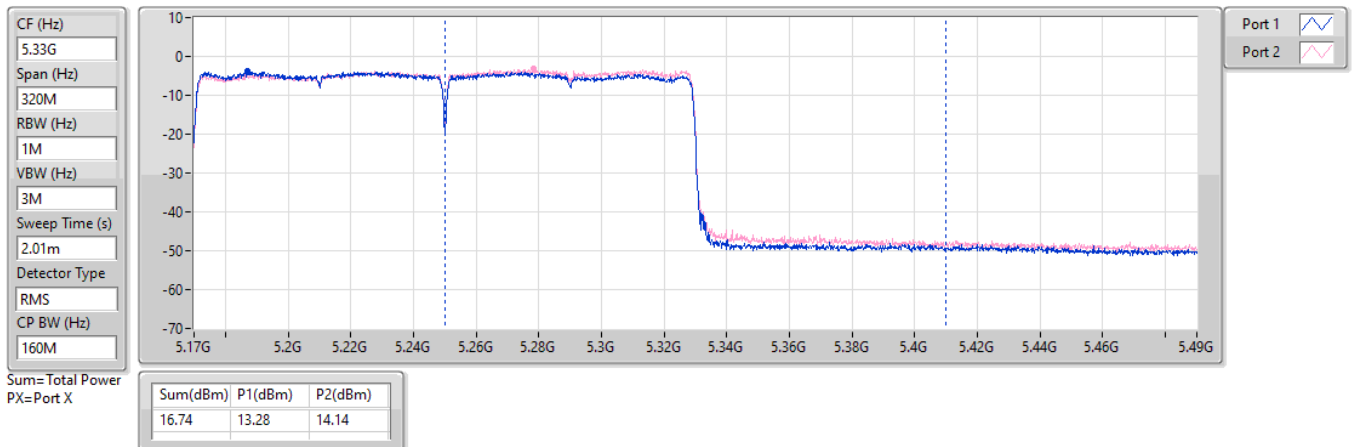



**Average Power_Non-Beamforming_
Radio 2_1T1S_Patch_Outdoor_Peak Gain**

Appendix C.18

Summary

Mode	Total Power (dBm)	Total Power (W)
5.15-5.25GHz	-	-
802.11a_Nss1,(6Mbps)_1TX	10.27	0.01064
802.11be EHT20_Nss1,(MCS0)_1TX	10.25	0.01059
802.11be EHT40_Nss1,(MCS0)_1TX	10.28	0.01067
802.11be EHT80_Nss1,(MCS0)_1TX	10.06	0.01014
802.11be EHT160_Nss1,(MCS0)_1TX	10.26	0.01062
5.25-5.35GHz	-	-
802.11a_Nss1,(6Mbps)_1TX	17.49	0.05610
802.11be EHT20_Nss1,(MCS0)_1TX	17.91	0.06180
802.11be EHT40_Nss1,(MCS0)_1TX	18.26	0.06699
802.11be EHT80_Nss1,(MCS0)_1TX	17.95	0.06237
802.11be EHT160_Nss1,(MCS0)_1TX	9.86	0.00968
5.47-5.725GHz	-	-
802.11a_Nss1,(6Mbps)_1TX	17.81	0.06039
802.11be EHT20_Nss1,(MCS0)_1TX	17.64	0.05808
802.11be EHT40_Nss1,(MCS0)_1TX	18.15	0.06531
802.11be EHT80_Nss1,(MCS0)_1TX	17.73	0.05929
802.11be EHT160_Nss1,(MCS0)_1TX	15.57	0.03606
5.725-5.85GHz	-	-
802.11a_Nss1,(6Mbps)_1TX	18.51	0.07096
802.11be EHT20_Nss1,(MCS0)_1TX	18.61	0.07261
802.11be EHT40_Nss1,(MCS0)_1TX	18.03	0.06353
802.11be EHT80_Nss1,(MCS0)_1TX	17.63	0.05794



Average Power_Non-Beamforming_ Radio 2_1T1S_Patch_Outdoor_Peak Gain

Appendix C.18

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Total Power (dBm)	Power Limit (dBm)
802.11a_Nss1,(6Mbps)_1TX	-	-	-	-	-
5180MHz	Pass	10.19	10.21	10.21	25.81
5200MHz	Pass	10.19	10.27	10.27	25.81
5240MHz	Pass	10.19	10.21	10.21	25.81
5260MHz	Pass	10.52	17.49	17.49	19.46
5300MHz	Pass	10.52	17.46	17.46	19.46
5320MHz	Pass	10.52	17.30	17.30	19.46
5500MHz	Pass	10.33	17.47	17.47	19.65
5580MHz	Pass	10.33	17.35	17.35	19.65
5700MHz	Pass	10.33	17.81	17.81	19.65
5720MHz Straddle 5.47-5.725GHz	Pass	10.33	16.45	16.45	18.54
5720MHz Straddle 5.725-5.85GHz	Pass	10.28	10.39	10.39	25.72
5745MHz	Pass	10.28	18.51	18.51	25.72
5785MHz	Pass	10.28	17.63	17.63	25.72
5825MHz	Pass	10.28	16.70	16.70	25.72
802.11be EHT20_Nss1,(MCS0)_1TX	-	-	-	-	-
5180MHz	Pass	10.19	10.25	10.25	25.81
5200MHz	Pass	10.19	10.20	10.20	25.81
5240MHz	Pass	10.19	10.23	10.23	25.81
5260MHz	Pass	10.52	17.91	17.91	19.46
5300MHz	Pass	10.52	17.60	17.60	19.46
5320MHz	Pass	10.52	17.38	17.38	19.46
5500MHz	Pass	10.33	17.64	17.64	19.65
5580MHz	Pass	10.33	17.43	17.43	19.65
5700MHz	Pass	10.33	14.44	14.44	19.65
5720MHz Straddle 5.47-5.725GHz	Pass	10.33	16.69	16.69	18.70
5720MHz Straddle 5.725-5.85GHz	Pass	10.28	11.53	11.53	25.72
5745MHz	Pass	10.28	18.61	18.61	25.72
5785MHz	Pass	10.28	17.86	17.86	25.72
5825MHz	Pass	10.28	16.94	16.94	25.72
802.11be EHT40_Nss1,(MCS0)_1TX	-	-	-	-	-
5190MHz	Pass	10.19	10.25	10.25	25.81
5230MHz	Pass	10.19	10.28	10.28	25.81
5270MHz	Pass	10.52	18.26	18.26	19.46
5310MHz	Pass	10.52	17.60	17.60	19.46
5510MHz	Pass	10.33	18.15	18.15	19.65
5550MHz	Pass	10.33	18.04	18.04	19.65
5670MHz	Pass	10.33	16.98	16.98	19.65
5710MHz Straddle 5.47-5.725GHz	Pass	10.33	18.08	18.08	19.65
5710MHz Straddle 5.725-5.85GHz	Pass	10.28	8.61	8.61	25.72
5755MHz	Pass	10.28	18.03	18.03	25.72
5795MHz	Pass	10.28	17.05	17.05	25.72
802.11be EHT80_Nss1,(MCS0)_1TX	-	-	-	-	-
5210MHz	Pass	10.19	10.06	10.06	25.81
5290MHz	Pass	10.52	17.95	17.95	19.46
5530MHz	Pass	10.33	17.66	17.66	19.65
5610MHz	Pass	10.33	17.73	17.73	19.65
5690MHz Straddle 5.47-5.725GHz	Pass	10.33	17.66	17.66	19.65
5690MHz Straddle 5.725-5.85GHz	Pass	10.28	4.38	4.38	25.72
5775MHz	Pass	10.28	17.63	17.63	25.72
802.11be EHT160_Nss1,(MCS0)_1TX	-	-	-	-	-
5250MHz Straddle 5.15-5.25GHz	Pass	10.19	10.26	10.26	25.81
5250MHz Straddle 5.25-5.35GHz	Pass	10.52	9.86	9.86	19.46
5570MHz	Pass	10.33	15.57	15.57	19.65


DG = Directional Gain; Port X = Port X output power
Inf = There's no restriction for the limit.

5.15-5.25GHz_802.11be EHT160_Nss1,(MCS0)_1TX

AV Power

5250MHz Straddle 5.15-5.25GHz_TX

21/05/2025

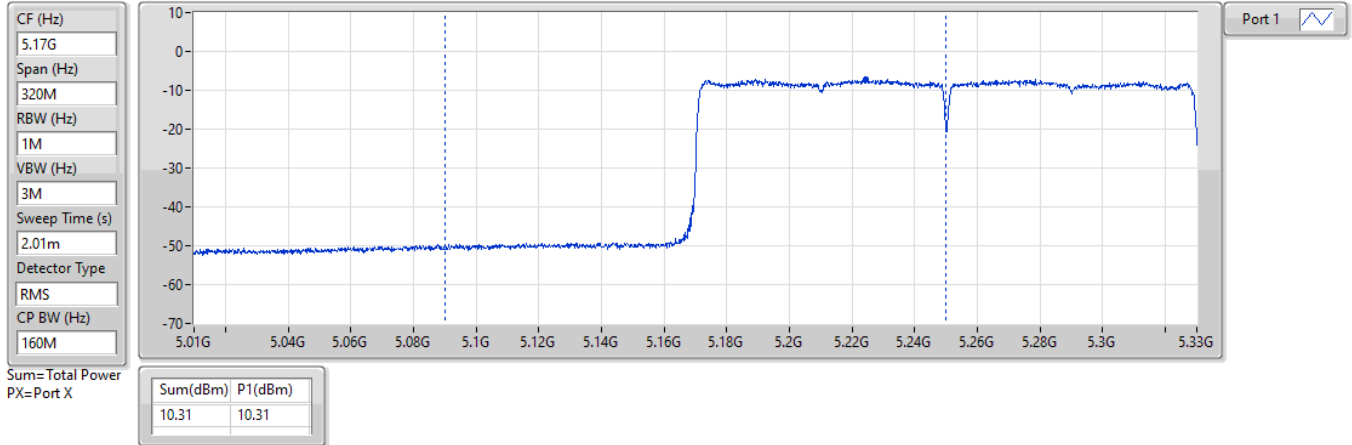


5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0)_1TX

AV Power

5250MHz Straddle 5.25-5.35GHz_TX

21/05/2025

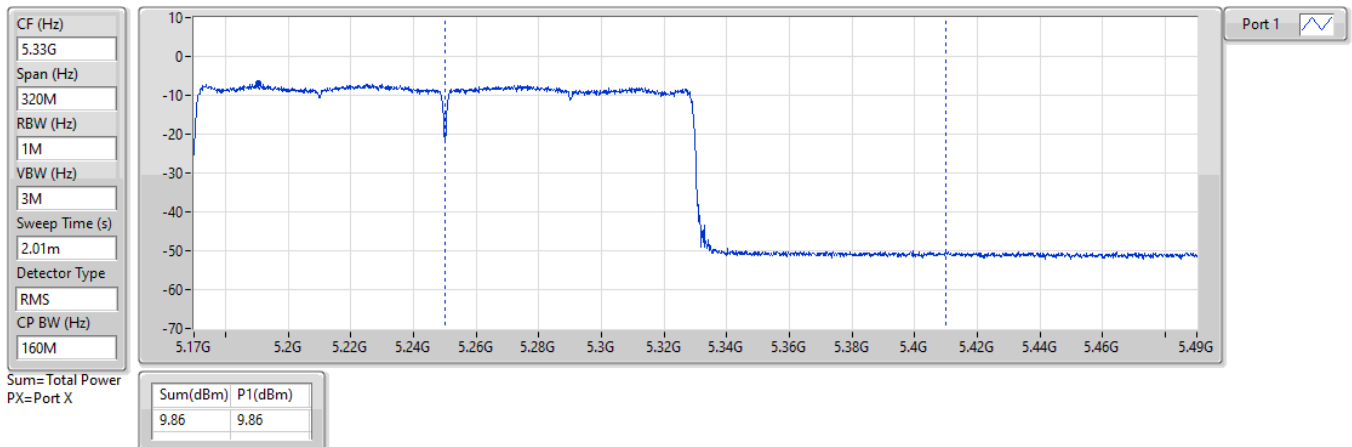



**Average Power_Non-Beamforming_
Radio 2_2T1S_Patch_Outdoor_Peak Gain**

Appendix C.19

Summary

Mode	Total Power (dBm)	Total Power (W)
5.15-5.25GHz	-	-
802.11a_Nss1,(6Mbps)_2TX	9.99	0.00998
802.11be EHT20_Nss1,(MCS0)_2TX	10.00	0.01000
802.11be EHT40_Nss1,(MCS0)_2TX	9.98	0.00995
802.11be EHT80_Nss1,(MCS0)_2TX	9.86	0.00968
802.11be EHT160_Nss1,(MCS0)_2TX	9.99	0.00998
5.25-5.35GHz	-	-
802.11a_Nss1,(6Mbps)_2TX	16.82	0.04808
802.11be EHT20_Nss1,(MCS0)_2TX	17.28	0.05346
802.11be EHT40_Nss1,(MCS0)_2TX	18.85	0.07674
802.11be EHT80_Nss1,(MCS0)_2TX	18.65	0.07328
802.11be EHT160_Nss1,(MCS0)_2TX	10.21	0.01050
5.47-5.725GHz	-	-
802.11a_Nss1,(6Mbps)_2TX	16.73	0.04710
802.11be EHT20_Nss1,(MCS0)_2TX	17.36	0.05445
802.11be EHT40_Nss1,(MCS0)_2TX	18.88	0.07727
802.11be EHT80_Nss1,(MCS0)_2TX	18.75	0.07499
802.11be EHT160_Nss1,(MCS0)_2TX	18.01	0.06324
5.725-5.85GHz	-	-
802.11a_Nss1,(6Mbps)_2TX	21.82	0.15205
802.11be EHT20_Nss1,(MCS0)_2TX	22.01	0.15885
802.11be EHT40_Nss1,(MCS0)_2TX	21.53	0.14223
802.11be EHT80_Nss1,(MCS0)_2TX	21.06	0.12764



Average Power_Non-Beamforming_ Radio 2_2T1S_Patch_Outdoor_Peak Gain

Appendix C.19

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Total Power (dBm)	Power Limit (dBm)
802.11a_Nss1,(6Mbps)_2TX	-	-	-	-	-	-
5180MHz	Pass	10.44	7.09	6.83	9.97	25.56
5200MHz	Pass	10.44	6.94	6.71	9.84	25.56
5240MHz	Pass	10.44	7.00	6.95	9.99	25.56
5260MHz	Pass	10.61	13.34	13.66	16.51	19.37
5300MHz	Pass	10.61	13.43	13.84	16.65	19.37
5320MHz	Pass	10.61	13.75	13.86	16.82	19.37
5500MHz	Pass	10.58	13.38	13.71	16.56	19.40
5580MHz	Pass	10.58	13.53	13.91	16.73	19.40
5700MHz	Pass	10.58	13.34	13.76	16.57	19.40
5720MHz Straddle 5.47-5.725GHz	Pass	10.58	12.16	12.87	15.54	18.38
5720MHz Straddle 5.725-5.85GHz	Pass	10.52	6.11	6.86	9.51	25.48
5745MHz	Pass	10.52	18.36	19.21	21.82	25.48
5785MHz	Pass	10.52	17.71	18.21	20.98	25.48
5825MHz	Pass	10.52	16.69	17.28	20.01	25.48
802.11be EHT20_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5180MHz	Pass	10.44	7.00	6.77	9.90	25.56
5200MHz	Pass	10.44	7.00	6.98	10.00	25.56
5240MHz	Pass	10.44	7.04	6.61	9.84	25.56
5260MHz	Pass	10.61	14.15	14.37	17.27	19.37
5300MHz	Pass	10.61	14.09	14.40	17.26	19.37
5320MHz	Pass	10.61	14.14	14.40	17.28	19.37
5500MHz	Pass	10.58	13.89	14.48	17.21	19.40
5580MHz	Pass	10.58	14.03	14.65	17.36	19.40
5700MHz	Pass	10.58	13.64	14.00	16.83	19.40
5720MHz Straddle 5.47-5.725GHz	Pass	10.58	12.69	13.31	16.02	18.96
5720MHz Straddle 5.725-5.85GHz	Pass	10.52	7.53	8.34	10.96	25.48
5745MHz	Pass	10.52	18.69	19.28	22.01	25.48
5785MHz	Pass	10.52	17.76	17.47	20.63	25.48
5825MHz	Pass	10.52	16.82	17.57	20.22	25.48
802.11be EHT40_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5190MHz	Pass	10.44	7.06	6.84	9.96	25.56
5230MHz	Pass	10.44	7.16	6.78	9.98	25.56
5270MHz	Pass	10.61	15.68	15.99	18.85	19.37
5310MHz	Pass	10.61	15.70	15.98	18.85	19.37
5510MHz	Pass	10.58	15.22	16.12	18.70	19.40
5550MHz	Pass	10.58	15.50	16.21	18.88	19.40
5670MHz	Pass	10.58	15.48	16.03	18.77	19.40
5710MHz Straddle 5.47-5.725GHz	Pass	10.58	15.35	15.88	18.63	19.40
5710MHz Straddle 5.725-5.85GHz	Pass	10.52	5.78	6.40	9.11	25.48
5755MHz	Pass	10.52	17.68	19.23	21.53	25.48
5795MHz	Pass	10.52	16.77	18.11	20.50	25.48
802.11be EHT80_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5210MHz	Pass	10.44	6.77	6.93	9.86	25.56
5290MHz	Pass	10.61	15.49	15.78	18.65	19.37
5530MHz	Pass	10.58	15.46	16.00	18.75	19.40
5610MHz	Pass	10.58	15.59	15.83	18.72	19.40
5690MHz Straddle 5.47-5.725GHz	Pass	10.58	15.39	16.05	18.74	19.40
5690MHz Straddle 5.725-5.85GHz	Pass	10.52	2.05	2.98	5.55	25.48
5775MHz	Pass	10.52	17.55	18.50	21.06	25.48
802.11be EHT160_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5250MHz Straddle 5.15-5.25GHz	Pass	10.44	7.41	6.51	9.99	25.56
5250MHz Straddle 5.25-5.35GHz	Pass	10.61	7.20	7.19	10.21	19.37
5570MHz	Pass	10.58	14.77	15.22	18.01	19.40

DG = Directional Gain; Port X = Port X output power


Inf = There's no restriction for the limit.

5.15-5.25GHz_802.11be EHT160_Nss1,(MCS0)_2TX

AV Power

5250MHz Straddle 5.15-5.25GHz_TX

23/05/2025

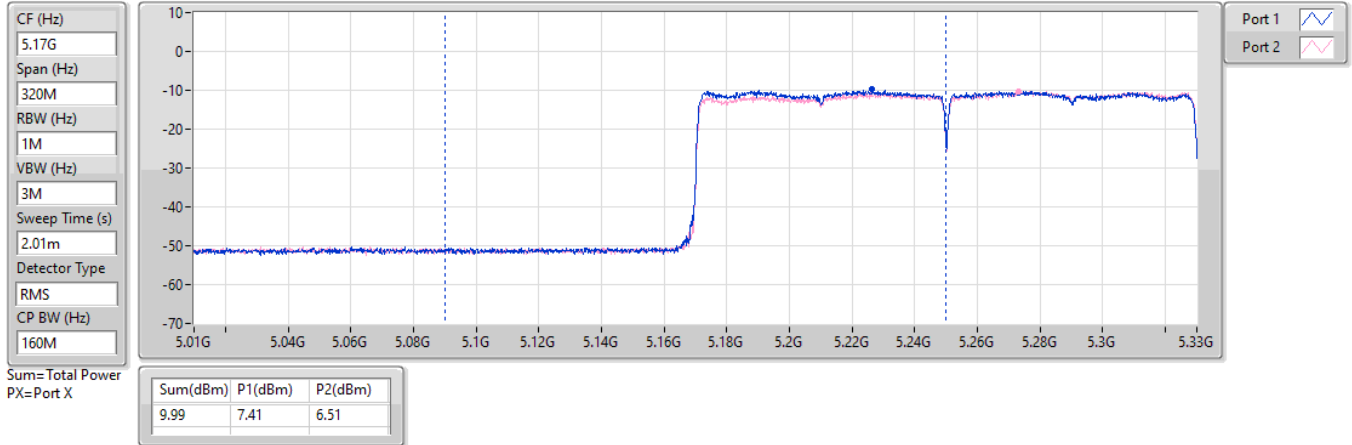


5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0)_2TX

AV Power

5250MHz Straddle 5.25-5.35GHz_TX

23/05/2025

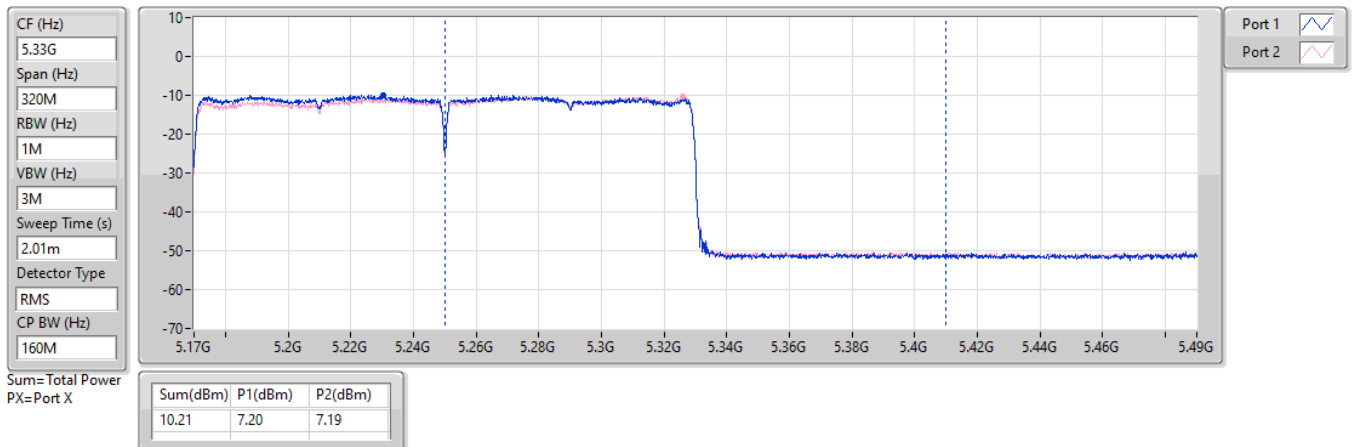



**Average Power Non-Beamforming
Radio 2 2T2S Patch Outdoor Peak Gain**

Appendix C.20

Summary

Mode	Total Power (dBm)	Total Power (W)
5.15-5.25GHz	-	-
802.11be EHT20_Nss2,(MCS0)_2TX	10.04	0.01009
802.11be EHT40_Nss2,(MCS0)_2TX	9.92	0.00982
802.11be EHT80_Nss2,(MCS0)_2TX	9.89	0.00975
802.11be EHT160_Nss2,(MCS0)_2TX	9.85	0.00966
5.25-5.35GHz	-	-
802.11be EHT20_Nss2,(MCS0)_2TX	18.79	0.07568
802.11be EHT40_Nss2,(MCS0)_2TX	18.82	0.07621
802.11be EHT80_Nss2,(MCS0)_2TX	18.80	0.07586
802.11be EHT160_Nss2,(MCS0)_2TX	10.09	0.01021
5.47-5.725GHz	-	-
802.11be EHT20_Nss2,(MCS0)_2TX	18.70	0.07413
802.11be EHT40_Nss2,(MCS0)_2TX	18.80	0.07586
802.11be EHT80_Nss2,(MCS0)_2TX	18.89	0.07745
802.11be EHT160_Nss2,(MCS0)_2TX	17.39	0.05483
5.725-5.85GHz	-	-
802.11be EHT20_Nss2,(MCS0)_2TX	22.05	0.16032
802.11be EHT40_Nss2,(MCS0)_2TX	21.74	0.14928
802.11be EHT80_Nss2,(MCS0)_2TX	21.00	0.12589



Average Power Non-Beamforming Radio 2 2T2S Patch Outdoor Peak Gain

Appendix C.20

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Total Power (dBm)	Power Limit (dBm)
802.11be EHT20_Nss2,(MCS0)_2TX	-	-	-	-	-	-
5180MHz	Pass	10.44	7.23	6.83	10.04	25.56
5200MHz	Pass	10.44	7.00	6.84	9.93	25.56
5240MHz	Pass	10.44	7.01	6.87	9.95	25.56
5260MHz	Pass	10.61	15.36	16.17	18.79	19.37
5300MHz	Pass	10.61	15.32	16.13	18.75	19.37
5320MHz	Pass	10.61	15.31	16.16	18.77	19.37
5500MHz	Pass	10.58	15.29	16.04	18.69	19.40
5580MHz	Pass	10.58	15.50	15.88	18.70	19.40
5700MHz	Pass	10.58	12.81	13.28	16.06	19.40
5720MHz Straddle 5.47-5.725GHz	Pass	10.58	14.58	15.32	17.98	18.52
5720MHz Straddle 5.725-5.85GHz	Pass	10.52	9.43	10.22	12.85	25.48
5745MHz	Pass	10.52	18.59	19.44	22.05	25.48
5785MHz	Pass	10.52	17.82	18.45	21.16	25.48
5825MHz	Pass	10.52	16.77	17.11	19.95	25.48
802.11be EHT40_Nss2,(MCS0)_2TX	-	-	-	-	-	-
5190MHz	Pass	10.44	6.97	6.71	9.85	25.56
5230MHz	Pass	10.44	7.23	6.57	9.92	25.56
5270MHz	Pass	10.61	15.63	15.99	18.82	19.37
5310MHz	Pass	10.61	15.42	15.83	18.64	19.37
5510MHz	Pass	10.58	15.32	16.15	18.77	19.40
5550MHz	Pass	10.58	15.32	16.14	18.76	19.40
5670MHz	Pass	10.58	14.59	14.96	17.79	19.40
5710MHz Straddle 5.47-5.725GHz	Pass	10.58	15.37	16.18	18.80	19.40
5710MHz Straddle 5.725-5.85GHz	Pass	10.52	5.76	6.61	9.22	25.48
5755MHz	Pass	10.52	18.12	19.26	21.74	25.48
5795MHz	Pass	10.52	17.07	18.17	20.67	25.48
802.11be EHT80_Nss2,(MCS0)_2TX	-	-	-	-	-	-
5210MHz	Pass	10.44	6.89	6.86	9.89	25.56
5290MHz	Pass	10.61	15.60	15.98	18.80	19.37
5530MHz	Pass	10.58	15.51	16.16	18.86	19.40
5610MHz	Pass	10.58	15.54	16.03	18.80	19.40
5690MHz Straddle 5.47-5.725GHz	Pass	10.58	15.52	16.22	18.89	19.40
5690MHz Straddle 5.725-5.85GHz	Pass	10.52	2.23	2.98	5.63	25.48
5775MHz	Pass	10.52	17.52	18.41	21.00	25.48
802.11be EHT160_Nss2,(MCS0)_2TX	-	-	-	-	-	-
5250MHz Straddle 5.15-5.25GHz	Pass	10.44	7.38	6.22	9.85	25.56
5250MHz Straddle 5.25-5.35GHz	Pass	10.61	7.14	7.02	10.09	19.37
5570MHz	Pass	10.58	14.24	14.52	17.39	19.40


DG = Directional Gain; Port X = Port X output power
Inf = There's no restriction for the limit.

5.15-5.25GHz_802.11be EHT160_Nss2,(MCS0)_2TX

AV Power

5250MHz Straddle 5.15-5.25GHz_TX

27/05/2025

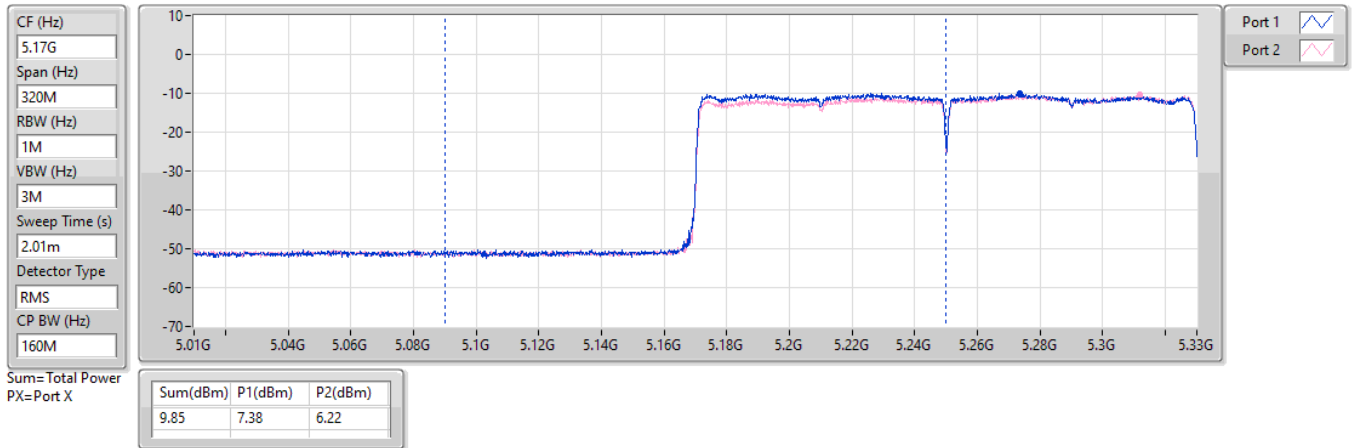


5.25-5.35GHz_802.11be EHT160_Nss2,(MCS0)_2TX

AV Power

5250MHz Straddle 5.25-5.35GHz_TX

27/05/2025

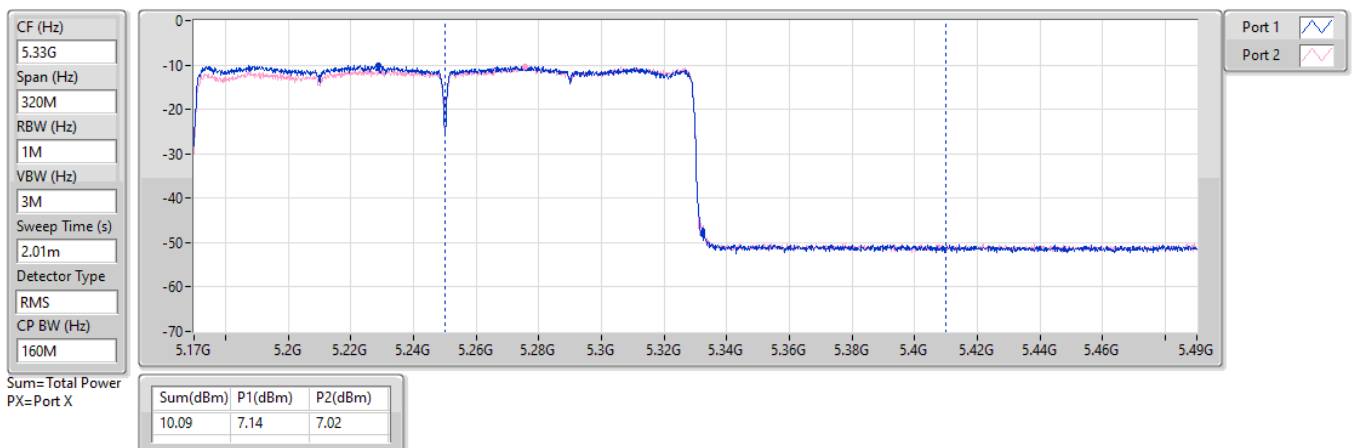


5.47-5.725GHz_802.11be EHT40_Nss2,(MCS0)_2TX

AV Power

5710MHz Straddle 5.47-5.725GHz_TX

20/05/2025

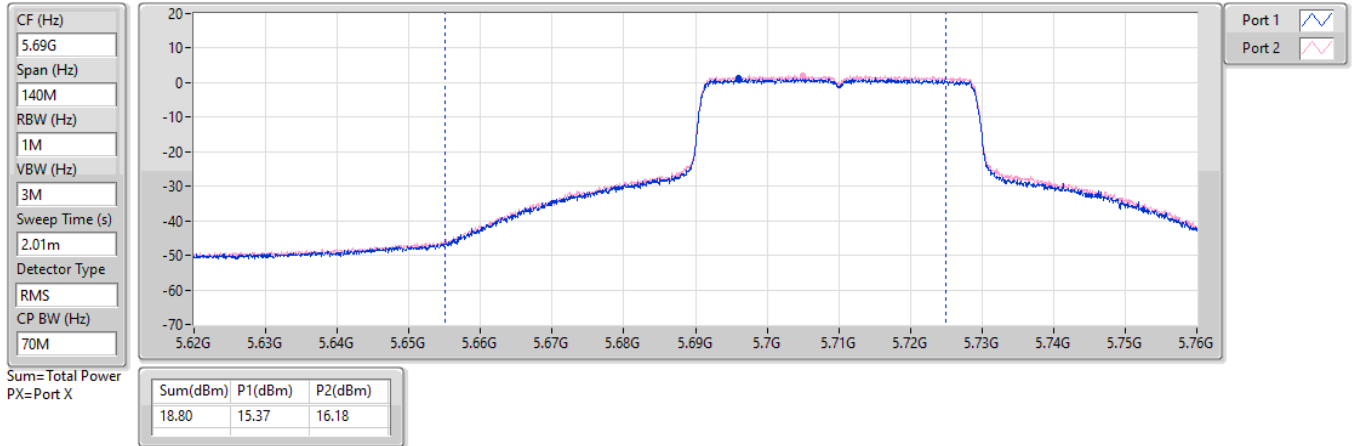


5.47-5.725GHz_802.11be EHT80_Nss2,(MCS0)_2TX

AV Power

5690MHz Straddle 5.47-5.725GHz_TX

20/05/2025

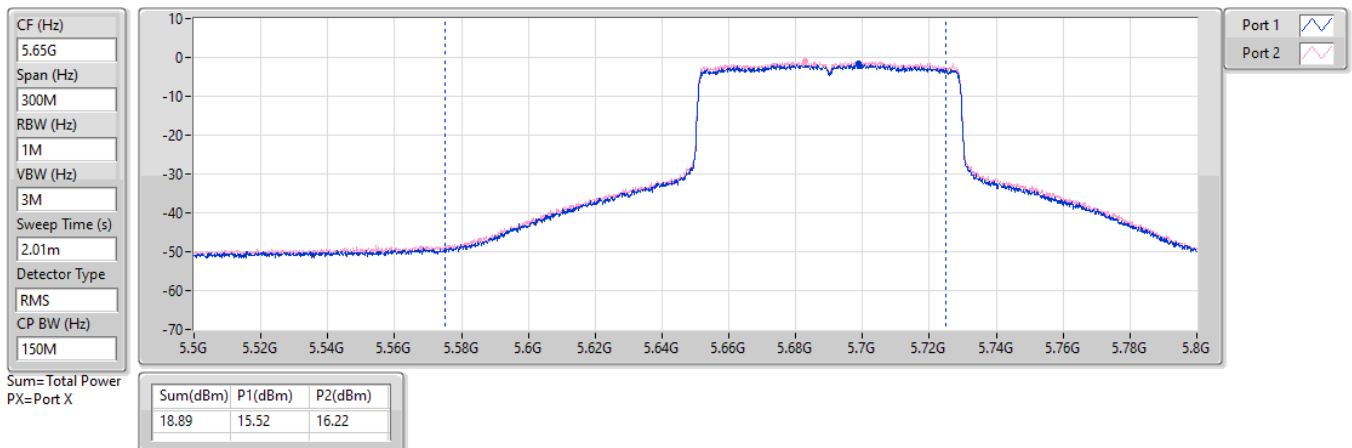



**Average Power_Non-Beamforming_
Radio 3_1T1S_Dipole_Outdoor_Peak Gain**

Appendix C.21

Summary

Mode	Total Power (dBm)	Total Power (W)
5.15-5.25GHz	-	-
802.11a_Nss1,(6Mbps)_1TX	16.63	0.04603
802.11be EHT20_Nss1,(MCS0)_1TX	16.47	0.04436
802.11be EHT40_Nss1,(MCS0)_1TX	16.61	0.04581
802.11be EHT80_Nss1,(MCS0)_1TX	16.61	0.04581
5.25-5.35GHz	-	-
802.11a_Nss1,(6Mbps)_1TX	18.62	0.07278
802.11be EHT20_Nss1,(MCS0)_1TX	18.88	0.07727
802.11be EHT40_Nss1,(MCS0)_1TX	18.68	0.07379
802.11be EHT80_Nss1,(MCS0)_1TX	18.29	0.06745



Average Power_Non-Beamforming_ Radio 3_1T1S_Dipole_Outdoor_Peak Gain

Appendix C.21

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Total Power (dBm)	Power Limit (dBm)
802.11a_Nss1,(6Mbps)_1TX	-	-	-	-	-
5180MHz	Pass	3.86	16.63	16.63	30.00
5200MHz	Pass	3.86	16.51	16.51	30.00
5240MHz	Pass	3.86	16.45	16.45	30.00
5260MHz	Pass	3.36	17.91	17.91	23.98
5300MHz	Pass	3.36	18.62	18.62	23.98
5320MHz	Pass	3.36	17.99	17.99	23.98
802.11be EHT20_Nss1,(MCS0)_1TX	-	-	-	-	-
5180MHz	Pass	3.86	16.33	16.33	30.00
5200MHz	Pass	3.86	16.40	16.40	30.00
5240MHz	Pass	3.86	16.47	16.47	30.00
5260MHz	Pass	3.36	18.08	18.08	23.98
5300MHz	Pass	3.36	18.88	18.88	23.98
5320MHz	Pass	3.36	18.00	18.00	23.98
802.11be EHT40_Nss1,(MCS0)_1TX	-	-	-	-	-
5190MHz	Pass	3.86	16.57	16.57	30.00
5230MHz	Pass	3.86	16.61	16.61	30.00
5270MHz	Pass	3.36	18.58	18.58	23.98
5310MHz	Pass	3.36	18.68	18.68	23.98
802.11be EHT80_Nss1,(MCS0)_1TX	-	-	-	-	-
5210MHz	Pass	3.86	16.61	16.61	30.00
5290MHz	Pass	3.36	18.29	18.29	23.98

DG = Directional Gain; Port X = Port X output power
Inf = There's no restriction for the limit.



**Average Power_Non-Beamforming_
Radio 3_2T1S_Dipole_Outdoor_Peak Gain**

Appendix C.22

Summary

Mode	Total Power (dBm)	Total Power (W)
5.15-5.25GHz	-	-
802.11a_Nss1,(6Mbps)_2TX	16.55	0.04519
802.11be EHT20_Nss1,(MCS0)_2TX	16.57	0.04539
802.11be EHT40_Nss1,(MCS0)_2TX	16.58	0.04550
802.11be EHT80_Nss1,(MCS0)_2TX	16.48	0.04446
5.25-5.35GHz	-	-
802.11a_Nss1,(6Mbps)_2TX	21.82	0.15205
802.11be EHT20_Nss1,(MCS0)_2TX	21.92	0.15560
802.11be EHT40_Nss1,(MCS0)_2TX	21.72	0.14859
802.11be EHT80_Nss1,(MCS0)_2TX	21.22	0.13243



**Average Power_Non-Beamforming_
Radio 3_2T1S_Dipole_Outdoor_Peak Gain**

Appendix C.22

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Total Power (dBm)	Power Limit (dBm)
802.11a_Nss1,(6Mbps)_2TX	-	-	-	-	-	-
5180MHz	Pass	3.86	13.31	13.50	16.42	30.00
5200MHz	Pass	3.86	13.43	13.52	16.49	30.00
5240MHz	Pass	3.86	13.51	13.57	16.55	30.00
5260MHz	Pass	3.36	17.90	18.09	21.01	23.98
5300MHz	Pass	3.36	18.62	18.99	21.82	23.98
5320MHz	Pass	3.36	17.87	18.40	21.15	23.98
802.11be EHT20_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5180MHz	Pass	3.86	13.49	13.49	16.50	30.00
5200MHz	Pass	3.86	13.27	13.57	16.43	30.00
5240MHz	Pass	3.86	13.62	13.50	16.57	30.00
5260MHz	Pass	3.36	18.10	18.04	21.08	23.98
5300MHz	Pass	3.36	18.83	18.98	21.92	23.98
5320MHz	Pass	3.36	17.98	18.54	21.28	23.98
802.11be EHT40_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5190MHz	Pass	3.86	13.52	13.62	16.58	30.00
5230MHz	Pass	3.86	13.44	13.65	16.56	30.00
5270MHz	Pass	3.36	18.70	18.39	21.56	23.98
5310MHz	Pass	3.36	18.70	18.71	21.72	23.98
802.11be EHT80_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5210MHz	Pass	3.86	13.39	13.54	16.48	30.00
5290MHz	Pass	3.36	18.18	18.24	21.22	23.98

DG = Directional Gain; Port X = Port X output power
Inf = There's no restriction for the limit.



**Average Power_Non-Beamforming_
Radio 3_2T2S_Dipole_Outdoor_Peak Gain**

Appendix C.23

Summary

Mode	Total Power (dBm)	Total Power (W)
5.15-5.25GHz	-	-
802.11be EHT20_Nss2,(MCS0)_2TX	16.63	0.04603
802.11be EHT40_Nss2,(MCS0)_2TX	16.60	0.04571
802.11be EHT80_Nss2,(MCS0)_2TX	16.59	0.04560
5.25-5.35GHz	-	-
802.11be EHT20_Nss2,(MCS0)_2TX	21.80	0.15136
802.11be EHT40_Nss2,(MCS0)_2TX	21.60	0.14454
802.11be EHT80_Nss2,(MCS0)_2TX	21.04	0.12706



**Average Power_Non-Beamforming_
Radio 3_2T2S_Dipole_Outdoor_Peak Gain**

Appendix C.23

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Total Power (dBm)	Power Limit (dBm)
802.11be EHT20_Nss2,(MCS0)_2TX	-	-	-	-	-	-
5180MHz	Pass	3.86	13.44	13.50	16.48	30.00
5200MHz	Pass	3.86	13.67	13.56	16.63	30.00
5240MHz	Pass	3.86	13.61	13.61	16.62	30.00
5260MHz	Pass	3.36	17.91	17.94	20.94	23.98
5300MHz	Pass	3.36	18.72	18.86	21.80	23.98
5320MHz	Pass	3.36	17.90	18.36	21.15	23.98
802.11be EHT40_Nss2,(MCS0)_2TX	-	-	-	-	-	-
5190MHz	Pass	3.86	13.61	13.42	16.53	30.00
5230MHz	Pass	3.86	13.68	13.49	16.60	30.00
5270MHz	Pass	3.36	18.46	18.28	21.38	23.98
5310MHz	Pass	3.36	18.59	18.58	21.60	23.98
802.11be EHT80_Nss2,(MCS0)_2TX	-	-	-	-	-	-
5210MHz	Pass	3.86	13.61	13.55	16.59	30.00
5290MHz	Pass	3.36	17.98	18.08	21.04	23.98

DG = Directional Gain; Port X = Port X output power
Inf = There's no restriction for the limit.



**Average Power_Non-Beamforming_
Radio 3_1T1S_Patch_Outdoor_Peak Gain**

Appendix C.24

Summary

Mode	Total Power (dBm)	Total Power (W)
5.15-5.25GHz	-	-
802.11a_Nss1,(6Mbps)_1TX	10.05	0.01012
802.11be EHT20_Nss1,(MCS0)_1TX	10.05	0.01012
802.11be EHT40_Nss1,(MCS0)_1TX	9.97	0.00993
802.11be EHT80_Nss1,(MCS0)_1TX	9.85	0.00966
5.25-5.35GHz	-	-
802.11a_Nss1,(6Mbps)_1TX	18.62	0.07278
802.11be EHT20_Nss1,(MCS0)_1TX	18.54	0.07145
802.11be EHT40_Nss1,(MCS0)_1TX	18.68	0.07379
802.11be EHT80_Nss1,(MCS0)_1TX	17.41	0.05508



Average Power_Non-Beamforming_ Radio 3_1T1S_Patch_Outdoor_Peak Gain

Appendix C.24

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Total Power (dBm)	Power Limit (dBm)
802.11a_Nss1,(6Mbps)_1TX	-	-	-	-	-
5180MHz	Pass	10.44	10.05	10.05	25.56
5200MHz	Pass	10.44	9.94	9.94	25.56
5240MHz	Pass	10.44	10.04	10.04	25.56
5260MHz	Pass	10.71	17.91	17.91	19.27
5300MHz	Pass	10.71	18.62	18.62	19.27
5320MHz	Pass	10.71	17.99	17.99	19.27
802.11be EHT20_Nss1,(MCS0)_1TX	-	-	-	-	-
5180MHz	Pass	10.44	10.05	10.05	25.56
5200MHz	Pass	10.44	10.04	10.04	25.56
5240MHz	Pass	10.44	9.78	9.78	25.56
5260MHz	Pass	10.71	18.08	18.08	19.27
5300MHz	Pass	10.71	18.54	18.54	19.27
5320MHz	Pass	10.71	18.00	18.00	19.27
802.11be EHT40_Nss1,(MCS0)_1TX	-	-	-	-	-
5190MHz	Pass	10.44	9.97	9.97	25.56
5230MHz	Pass	10.44	9.84	9.84	25.56
5270MHz	Pass	10.71	18.58	18.58	19.27
5310MHz	Pass	10.71	18.68	18.68	19.27
802.11be EHT80_Nss1,(MCS0)_1TX	-	-	-	-	-
5210MHz	Pass	10.44	9.85	9.85	25.56
5290MHz	Pass	10.71	17.41	17.41	19.27

DG = Directional Gain; Port X = Port X output power
Inf = There's no restriction for the limit.



**Average Power_Non-Beamforming_
Radio 3_2T1S_Patch_Outdoor_Peak Gain**

Appendix C.25

Summary

Mode	Total Power (dBm)	Total Power (W)
5.15-5.25GHz	-	-
802.11a_Nss1,(6Mbps)_2TX	10.00	0.01000
802.11be EHT20_Nss1,(MCS0)_2TX	9.96	0.00991
802.11be EHT40_Nss1,(MCS0)_2TX	10.03	0.01007
802.11be EHT80_Nss1,(MCS0)_2TX	9.88	0.00973
5.25-5.35GHz	-	-
802.11a_Nss1,(6Mbps)_2TX	16.62	0.04592
802.11be EHT20_Nss1,(MCS0)_2TX	17.13	0.05164
802.11be EHT40_Nss1,(MCS0)_2TX	18.69	0.07396
802.11be EHT80_Nss1,(MCS0)_2TX	18.51	0.07096



Average Power_Non-Beamforming_ Radio 3_2T1S_Patch_Outdoor_Peak Gain

Appendix C.25

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Total Power (dBm)	Power Limit (dBm)
802.11a_Nss1,(6Mbps)_2TX	-	-	-	-	-	-
5180MHz	Pass	10.44	6.93	6.91	9.93	25.56
5200MHz	Pass	10.44	6.92	7.05	10.00	25.56
5240MHz	Pass	10.44	7.00	6.83	9.93	25.56
5260MHz	Pass	10.71	13.59	13.62	16.62	19.27
5300MHz	Pass	10.71	13.39	13.47	16.44	19.27
5320MHz	Pass	10.71	12.97	13.53	16.27	19.27
802.11be EHT20_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5180MHz	Pass	10.44	6.88	7.01	9.96	25.56
5200MHz	Pass	10.44	6.82	6.91	9.88	25.56
5240MHz	Pass	10.44	6.87	6.69	9.79	25.56
5260MHz	Pass	10.71	13.93	14.14	17.05	19.27
5300MHz	Pass	10.71	14.01	14.23	17.13	19.27
5320MHz	Pass	10.71	13.73	14.16	16.96	19.27
802.11be EHT40_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5190MHz	Pass	10.44	7.00	7.03	10.03	25.56
5230MHz	Pass	10.44	6.94	6.75	9.86	25.56
5270MHz	Pass	10.71	15.75	15.60	18.69	19.27
5310MHz	Pass	10.71	15.67	15.57	18.63	19.27
802.11be EHT80_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5210MHz	Pass	10.44	6.86	6.87	9.88	25.56
5290MHz	Pass	10.71	15.46	15.54	18.51	19.27

DG = Directional Gain; Port X = Port X output power
Inf = There's no restriction for the limit.



**Average Power _Non-Beamforming_
Radio 3_2T2S_Patch_Outdoor_Peak Gain**

Appendix C.26

Summary

Mode	Total Power (dBm)	Total Power (W)
5.15-5.25GHz	-	-
802.11be EHT20_Nss2,(MCS0)_2TX	10.05	0.01012
802.11be EHT40_Nss2,(MCS0)_2TX	10.03	0.01007
802.11be EHT80_Nss2,(MCS0)_2TX	9.91	0.00979
5.25-5.35GHz	-	-
802.11be EHT20_Nss2,(MCS0)_2TX	18.75	0.07499
802.11be EHT40_Nss2,(MCS0)_2TX	18.74	0.07482
802.11be EHT80_Nss2,(MCS0)_2TX	18.52	0.07112



**Average Power_Non-Beamforming_
Radio 3_2T2S_Patch_Outdoor_Peak Gain**

Appendix C.26

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Total Power (dBm)	Power Limit (dBm)
802.11be EHT20_Nss2,(MCS0)_2TX	-	-	-	-	-	-
5180MHz	Pass	10.44	6.81	6.93	9.88	25.56
5200MHz	Pass	10.44	6.99	7.08	10.05	25.56
5240MHz	Pass	10.44	7.18	6.88	10.04	25.56
5260MHz	Pass	10.71	15.65	15.82	18.75	19.27
5300MHz	Pass	10.71	15.61	15.74	18.69	19.27
5320MHz	Pass	10.71	15.50	15.95	18.74	19.27
802.11be EHT40_Nss2,(MCS0)_2TX	-	-	-	-	-	-
5190MHz	Pass	10.44	6.97	7.01	10.00	25.56
5230MHz	Pass	10.44	7.08	6.96	10.03	25.56
5270MHz	Pass	10.71	15.88	15.57	18.74	19.27
5310MHz	Pass	10.71	15.67	15.70	18.70	19.27
802.11be EHT80_Nss2,(MCS0)_2TX	-	-	-	-	-	-
5210MHz	Pass	10.44	6.89	6.91	9.91	25.56
5290MHz	Pass	10.71	15.48	15.53	18.52	19.27

DG = Directional Gain; Port X = Port X output power
Inf = There's no restriction for the limit.



**Average Power Non-Beamforming
Radio 2_1T1S_Dipole_Outdoor_30 Degree Gain**

Appendix C.27

Summary

Mode	Total Power (dBm)	Total Power (W)
5.15-5.25GHz	-	-
802.11a_Nss1,(6Mbps)_1TX	17.15	0.05188
802.11be EHT20_Nss1,(MCS0)_1TX	17.07	0.05093
802.11be EHT40_Nss1,(MCS0)_1TX	17.08	0.05105
802.11be EHT80_Nss1,(MCS0)_1TX	17.01	0.05023
802.11be EHT160_Nss1,(MCS0)_1TX	16.21	0.04178
5.25-5.35GHz	-	-
802.11a_Nss1,(6Mbps)_1TX	17.49	0.05610
802.11be EHT20_Nss1,(MCS0)_1TX	17.91	0.06180
802.11be EHT40_Nss1,(MCS0)_1TX	18.26	0.06699
802.11be EHT80_Nss1,(MCS0)_1TX	17.95	0.06237
802.11be EHT160_Nss1,(MCS0)_1TX	15.78	0.03784
5.47-5.725GHz	-	-
802.11a_Nss1,(6Mbps)_1TX	17.47	0.05585
802.11be EHT20_Nss1,(MCS0)_1TX	17.64	0.05808
802.11be EHT40_Nss1,(MCS0)_1TX	18.21	0.06622
802.11be EHT80_Nss1,(MCS0)_1TX	17.73	0.05929
802.11be EHT160_Nss1,(MCS0)_1TX	16.72	0.04699
5.725-5.85GHz	-	-
802.11a_Nss1,(6Mbps)_1TX	18.51	0.07096
802.11be EHT20_Nss1,(MCS0)_1TX	18.61	0.07261
802.11be EHT40_Nss1,(MCS0)_1TX	18.03	0.06353
802.11be EHT80_Nss1,(MCS0)_1TX	17.63	0.05794



**Average Power_Non-Beamforming_
Radio 2_1T1S_Dipole_Outdoor_30 Degree Gain**

Appendix C.27

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Total Power (dBm)	Power Limit (dBm)
802.11a_Nss1,(6Mbps)_1TX	-	-	-	-	-
5180MHz	Pass	3.33	17.09	17.09	30.00
5200MHz	Pass	3.33	17.15	17.15	30.00
5240MHz	Pass	3.33	17.11	17.11	30.00
5260MHz	Pass	3.17	17.49	17.49	23.98
5300MHz	Pass	3.17	17.46	17.46	23.98
5320MHz	Pass	3.17	17.30	17.30	23.98
5500MHz	Pass	3.19	17.47	17.47	23.98
5580MHz	Pass	3.19	17.35	17.35	23.98
5700MHz	Pass	3.19	16.83	16.83	23.98
5720MHz Straddle 5.47-5.725GHz	Pass	3.19	16.45	16.45	22.87
5720MHz Straddle 5.725-5.85GHz	Pass	3.42	10.39	10.39	30.00
5745MHz	Pass	3.42	18.51	18.51	30.00
5785MHz	Pass	3.42	17.63	17.63	30.00
5825MHz	Pass	3.42	16.70	16.70	30.00
802.11be EHT20_Nss1,(MCS0)_1TX	-	-	-	-	-
5180MHz	Pass	3.33	17.01	17.01	30.00
5200MHz	Pass	3.33	17.05	17.05	30.00
5240MHz	Pass	3.33	17.07	17.07	30.00
5260MHz	Pass	3.17	17.91	17.91	23.98
5300MHz	Pass	3.17	17.60	17.60	23.98
5320MHz	Pass	3.17	17.38	17.38	23.98
5500MHz	Pass	3.19	17.64	17.64	23.98
5580MHz	Pass	3.19	17.43	17.43	23.98
5700MHz	Pass	3.19	15.38	15.38	23.98
5720MHz Straddle 5.47-5.725GHz	Pass	3.19	16.69	16.69	23.03
5720MHz Straddle 5.725-5.85GHz	Pass	3.42	11.53	11.53	30.00
5745MHz	Pass	3.42	18.61	18.61	30.00
5785MHz	Pass	3.42	17.86	17.86	30.00
5825MHz	Pass	3.42	16.94	16.94	30.00
802.11be EHT40_Nss1,(MCS0)_1TX	-	-	-	-	-
5190MHz	Pass	3.33	17.08	17.08	30.00
5230MHz	Pass	3.33	17.06	17.06	30.00
5270MHz	Pass	3.17	18.26	18.26	23.98
5310MHz	Pass	3.17	17.60	17.60	23.98
5510MHz	Pass	3.19	18.15	18.15	23.98
5550MHz	Pass	3.19	18.04	18.04	23.98
5670MHz	Pass	3.19	18.21	18.21	23.98
5710MHz Straddle 5.47-5.725GHz	Pass	3.19	18.08	18.08	23.98
5710MHz Straddle 5.725-5.85GHz	Pass	3.42	8.61	8.61	30.00
5755MHz	Pass	3.42	18.03	18.03	30.00
5795MHz	Pass	3.42	17.05	17.05	30.00
802.11be EHT80_Nss1,(MCS0)_1TX	-	-	-	-	-
5210MHz	Pass	3.33	17.01	17.01	30.00
5290MHz	Pass	3.17	17.95	17.95	23.98
5530MHz	Pass	3.19	17.66	17.66	23.98
5610MHz	Pass	3.19	17.73	17.73	23.98
5690MHz Straddle 5.47-5.725GHz	Pass	3.19	17.66	17.66	23.98
5690MHz Straddle 5.725-5.85GHz	Pass	3.42	4.38	4.38	30.00
5775MHz	Pass	3.42	17.63	17.63	30.00
802.11be EHT160_Nss1,(MCS0)_1TX	-	-	-	-	-
5250MHz Straddle 5.15-5.25GHz	Pass	3.33	16.21	16.21	30.00
5250MHz Straddle 5.25-5.35GHz	Pass	3.17	15.78	15.78	23.98
5570MHz	Pass	3.19	16.72	16.72	23.98


DG = Directional Gain; Port X = Port X output power
Inf = There's no restriction for the limit.

5.15-5.25GHz_802.11be EHT160_Nss1,(MCS0)_1TX

AV Power

5250MHz Straddle 5.15-5.25GHz_TX

20/05/2025

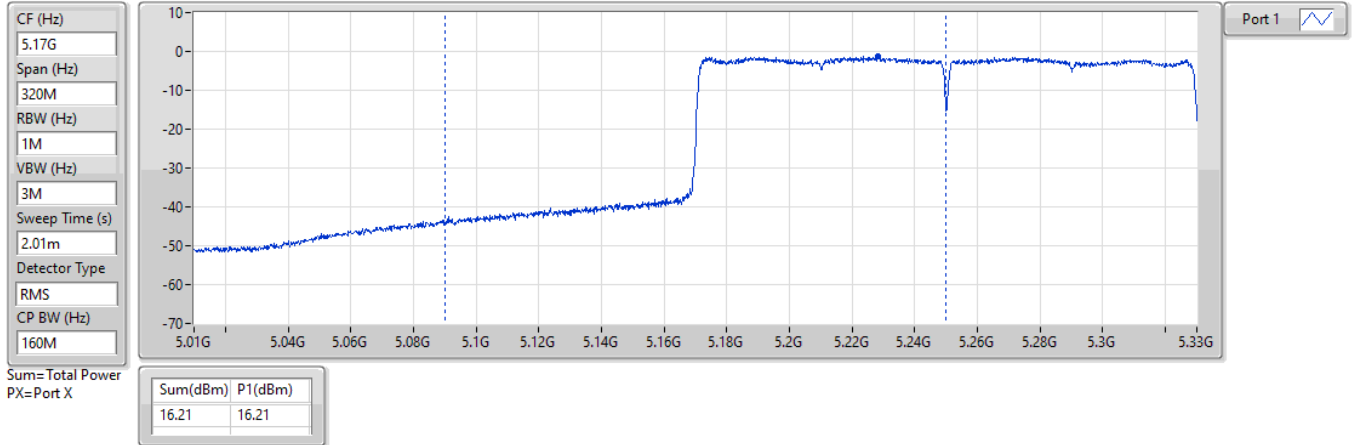


5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0)_1TX

AV Power

5250MHz Straddle 5.25-5.35GHz_TX

20/05/2025

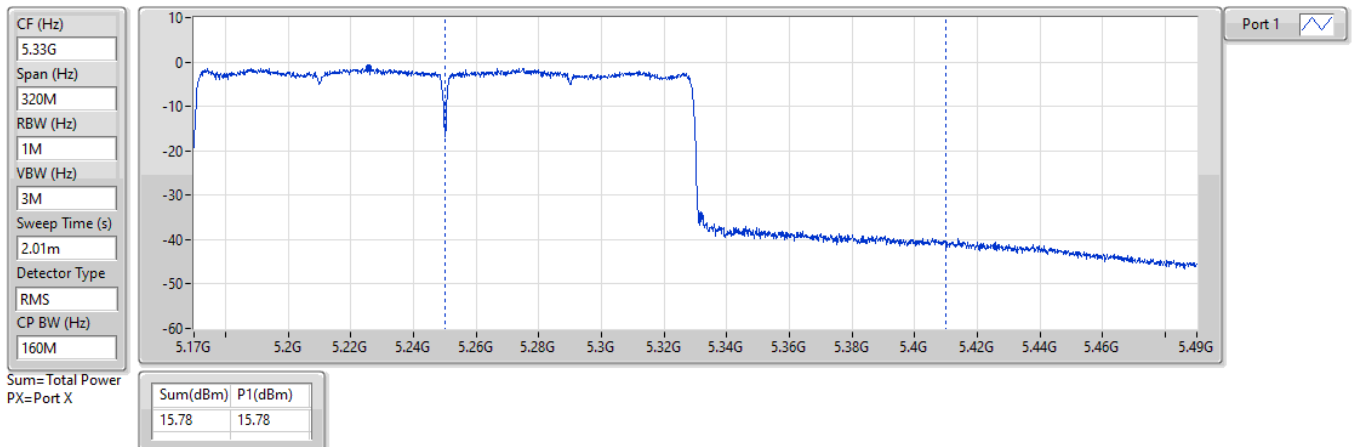



**Average Power_Non-Beamforming_
Radio 2_2T1S_Dipole_Outdoor_30 Degree Gain**

Appendix C.28

Summary

Mode	Total Power (dBm)	Total Power (W)
5.15-5.25GHz	-	-
802.11a_Nss1,(6Mbps)_2TX	17.11	0.05140
802.11be EHT20_Nss1,(MCS0)_2TX	17.10	0.05129
802.11be EHT40_Nss1,(MCS0)_2TX	17.11	0.05140
802.11be EHT80_Nss1,(MCS0)_2TX	17.03	0.05047
802.11be EHT160_Nss1,(MCS0)_2TX	17.04	0.05058
5.25-5.35GHz	-	-
802.11a_Nss1,(6Mbps)_2TX	21.13	0.12972
802.11be EHT20_Nss1,(MCS0)_2TX	21.19	0.13152
802.11be EHT40_Nss1,(MCS0)_2TX	21.51	0.14158
802.11be EHT80_Nss1,(MCS0)_2TX	21.10	0.12882
802.11be EHT160_Nss1,(MCS0)_2TX	17.22	0.05272
5.47-5.725GHz	-	-
802.11a_Nss1,(6Mbps)_2TX	20.91	0.12331
802.11be EHT20_Nss1,(MCS0)_2TX	21.06	0.12764
802.11be EHT40_Nss1,(MCS0)_2TX	21.38	0.13740
802.11be EHT80_Nss1,(MCS0)_2TX	20.92	0.12359
802.11be EHT160_Nss1,(MCS0)_2TX	18.33	0.06808
5.725-5.85GHz	-	-
802.11a_Nss1,(6Mbps)_2TX	21.82	0.15205
802.11be EHT20_Nss1,(MCS0)_2TX	22.01	0.15885
802.11be EHT40_Nss1,(MCS0)_2TX	21.53	0.14223
802.11be EHT80_Nss1,(MCS0)_2TX	21.06	0.12764

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Total Power (dBm)	Power Limit (dBm)
802.11a_Nss1,(6Mbps)_2TX	-	-	-	-	-	-
5180MHz	Pass	3.33	13.68	14.20	16.96	30.00
5200MHz	Pass	3.33	13.79	14.39	17.11	30.00
5240MHz	Pass	3.33	13.82	14.13	16.99	30.00
5260MHz	Pass	3.26	17.64	18.55	21.13	23.98
5300MHz	Pass	3.26	17.31	18.32	20.85	23.98
5320MHz	Pass	3.26	17.27	18.13	20.73	23.98
5500MHz	Pass	3.44	17.55	18.22	20.91	23.98
5580MHz	Pass	3.44	17.19	17.87	20.55	23.98
5700MHz	Pass	3.44	15.10	15.70	18.42	23.98
5720MHz Straddle 5.47-5.725GHz	Pass	3.44	16.30	17.34	19.86	23.03
5720MHz Straddle 5.725-5.85GHz	Pass	3.66	10.33	11.23	13.81	30.00
5745MHz	Pass	3.66	18.36	19.21	21.82	30.00
5785MHz	Pass	3.66	17.71	18.21	20.98	30.00
5825MHz	Pass	3.66	16.69	17.28	20.01	30.00
802.11be EHT20_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5180MHz	Pass	3.33	13.83	14.19	17.02	30.00
5200MHz	Pass	3.33	13.91	14.27	17.10	30.00
5240MHz	Pass	3.33	13.89	13.99	16.95	30.00
5260MHz	Pass	3.26	17.70	18.62	21.19	23.98
5300MHz	Pass	3.26	17.52	18.17	20.87	23.98
5320MHz	Pass	3.26	17.30	18.08	20.72	23.98
5500MHz	Pass	3.44	17.60	18.46	21.06	23.98
5580MHz	Pass	3.44	17.28	17.89	20.61	23.98
5700MHz	Pass	3.44	15.05	15.51	18.30	23.98
5720MHz Straddle 5.47-5.725GHz	Pass	3.44	16.28	17.22	19.79	23.05
5720MHz Straddle 5.725-5.85GHz	Pass	3.66	11.10	12.07	14.62	30.00
5745MHz	Pass	3.66	18.69	19.28	22.01	30.00
5785MHz	Pass	3.66	17.76	17.47	20.63	30.00
5825MHz	Pass	3.66	16.82	17.57	20.22	30.00
802.11be EHT40_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5190MHz	Pass	3.33	13.91	14.22	17.08	30.00
5230MHz	Pass	3.33	14.01	14.19	17.11	30.00
5270MHz	Pass	3.26	17.81	19.09	21.51	23.98
5310MHz	Pass	3.26	18.19	18.65	21.44	23.98
5510MHz	Pass	3.44	17.76	18.66	21.24	23.98
5550MHz	Pass	3.44	17.92	18.78	21.38	23.98
5670MHz	Pass	3.44	17.73	18.45	21.12	23.98
5710MHz Straddle 5.47-5.725GHz	Pass	3.44	17.68	18.51	21.13	23.98
5710MHz Straddle 5.725-5.85GHz	Pass	3.66	8.03	8.96	11.53	30.00
5755MHz	Pass	3.66	17.68	19.23	21.53	30.00
5795MHz	Pass	3.66	16.77	18.11	20.50	30.00
802.11be EHT80_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5210MHz	Pass	3.33	13.89	14.15	17.03	30.00
5290MHz	Pass	3.26	17.70	18.44	21.10	23.98
5530MHz	Pass	3.44	17.66	18.15	20.92	23.98
5610MHz	Pass	3.44	17.50	18.21	20.88	23.98
5690MHz Straddle 5.47-5.725GHz	Pass	3.44	17.27	17.95	20.63	23.98
5690MHz Straddle 5.725-5.85GHz	Pass	3.66	3.93	4.68	7.33	30.00
5775MHz	Pass	3.66	17.55	18.50	21.06	30.00
802.11be EHT160_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5250MHz Straddle 5.15-5.25GHz	Pass	3.33	13.95	14.11	17.04	30.00
5250MHz Straddle 5.25-5.35GHz	Pass	3.26	13.46	14.85	17.22	23.98
5570MHz	Pass	3.44	15.05	15.58	18.33	23.98


DG = Directional Gain; Port X = Port X output power
Inf = There's no restriction for the limit.

5.15-5.25GHz_802.11be EHT160_Nss1,(MCS0)_2TX

AV Power

5250MHz Straddle 5.15-5.25GHz_TX

22/05/2025

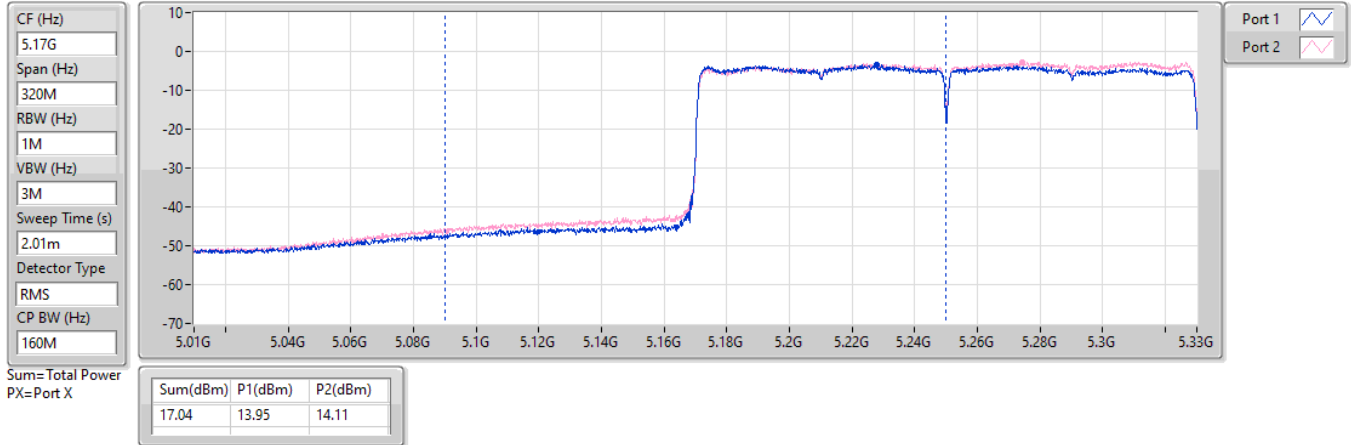


5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0)_2TX

AV Power

5250MHz Straddle 5.25-5.35GHz_TX

22/05/2025

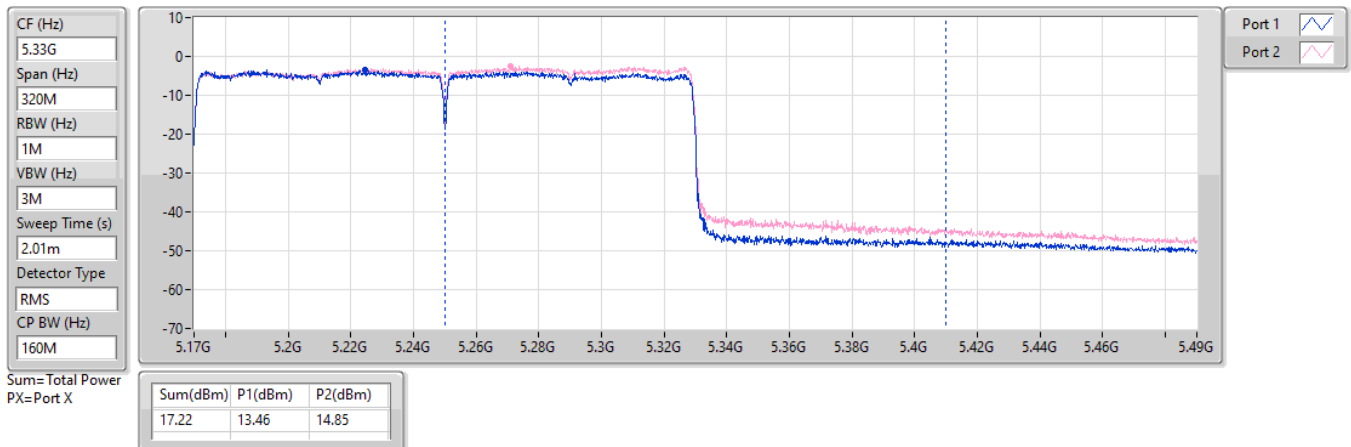



**Average Power_Non-Beamforming_
Radio 2_2T2S_Dipole_Outdoor_30 Degree Gain**

Appendix C.29

Summary

Mode	Total Power (dBm)	Total Power (W)
5.15-5.25GHz	-	-
802.11be EHT20_Nss2,(MCS0)_2TX	17.14	0.05176
802.11be EHT40_Nss2,(MCS0)_2TX	17.15	0.05188
802.11be EHT80_Nss2,(MCS0)_2TX	16.97	0.04977
802.11be EHT160_Nss2,(MCS0)_2TX	16.99	0.05000
5.25-5.35GHz	-	-
802.11be EHT20_Nss2,(MCS0)_2TX	21.26	0.13366
802.11be EHT40_Nss2,(MCS0)_2TX	21.62	0.14521
802.11be EHT80_Nss2,(MCS0)_2TX	21.07	0.12794
802.11be EHT160_Nss2,(MCS0)_2TX	17.15	0.05188
5.47-5.725GHz	-	-
802.11be EHT20_Nss2,(MCS0)_2TX	20.61	0.11508
802.11be EHT40_Nss2,(MCS0)_2TX	21.53	0.14223
802.11be EHT80_Nss2,(MCS0)_2TX	20.99	0.12560
802.11be EHT160_Nss2,(MCS0)_2TX	17.84	0.06081
5.725-5.85GHz	-	-
802.11be EHT20_Nss2,(MCS0)_2TX	22.05	0.16032
802.11be EHT40_Nss2,(MCS0)_2TX	21.74	0.14928
802.11be EHT80_Nss2,(MCS0)_2TX	21.00	0.12589



Average Power_Non-Beamforming_ Radio 2_2T2S_Dipole_Outdoor_30 Degree Gain

Appendix C.29

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Total Power (dBm)	Power Limit (dBm)
802.11be EHT20_Nss2,(MCS0)_2TX	-	-	-	-	-	-
5180MHz	Pass	3.33	13.79	14.34	17.08	30.00
5200MHz	Pass	3.33	13.82	14.38	17.12	30.00
5240MHz	Pass	3.33	13.90	14.35	17.14	30.00
5260MHz	Pass	3.26	17.80	18.65	21.26	23.98
5300MHz	Pass	3.26	17.69	18.31	21.02	23.98
5320MHz	Pass	3.26	17.35	18.25	20.83	23.98
5500MHz	Pass	3.44	17.50	17.08	20.31	23.98
5580MHz	Pass	3.44	17.28	17.89	20.61	23.98
5700MHz	Pass	3.44	15.46	16.07	18.79	23.98
5720MHz Straddle 5.47-5.725GHz	Pass	3.44	16.37	17.34	19.89	22.92
5720MHz Straddle 5.725-5.85GHz	Pass	3.66	11.21	12.25	14.77	30.00
5745MHz	Pass	3.66	18.59	19.44	22.05	30.00
5785MHz	Pass	3.66	17.82	18.45	21.16	30.00
5825MHz	Pass	3.66	16.77	17.11	19.95	30.00
802.11be EHT40_Nss2,(MCS0)_2TX	-	-	-	-	-	-
5190MHz	Pass	3.33	14.04	14.18	17.12	30.00
5230MHz	Pass	3.33	14.13	14.15	17.15	30.00
5270MHz	Pass	3.26	18.12	19.05	21.62	23.98
5310MHz	Pass	3.26	17.88	18.58	21.25	23.98
5510MHz	Pass	3.44	17.94	19.00	21.51	23.98
5550MHz	Pass	3.44	18.09	18.91	21.53	23.98
5670MHz	Pass	3.44	18.08	18.64	21.38	23.98
5710MHz Straddle 5.47-5.725GHz	Pass	3.44	17.87	18.68	21.30	23.98
5710MHz Straddle 5.725-5.85GHz	Pass	3.66	8.09	9.15	11.66	30.00
5755MHz	Pass	3.66	18.12	19.26	21.74	30.00
5795MHz	Pass	3.66	17.07	18.17	20.67	30.00
802.11be EHT80_Nss2,(MCS0)_2TX	-	-	-	-	-	-
5210MHz	Pass	3.33	13.85	14.07	16.97	30.00
5290MHz	Pass	3.26	17.74	18.35	21.07	23.98
5530MHz	Pass	3.44	17.56	18.37	20.99	23.98
5610MHz	Pass	3.44	17.51	18.22	20.89	23.98
5690MHz Straddle 5.47-5.725GHz	Pass	3.44	17.24	17.99	20.64	23.98
5690MHz Straddle 5.725-5.85GHz	Pass	3.66	3.95	4.78	7.40	30.00
5775MHz	Pass	3.66	17.52	18.41	21.00	30.00
802.11be EHT160_Nss2,(MCS0)_2TX	-	-	-	-	-	-
5250MHz Straddle 5.15-5.25GHz	Pass	3.33	13.95	14.01	16.99	30.00
5250MHz Straddle 5.25-5.35GHz	Pass	3.26	13.52	14.69	17.15	23.98
5570MHz	Pass	3.44	14.63	15.03	17.84	23.98


DG = Directional Gain; Port X = Port X output power
Inf = There's no restriction for the limit.

5.15-5.25GHz_802.11be EHT160_Nss2,(MCS0)_2TX

AV Power

5250MHz Straddle 5.15-5.25GHz_TX

23/05/2025

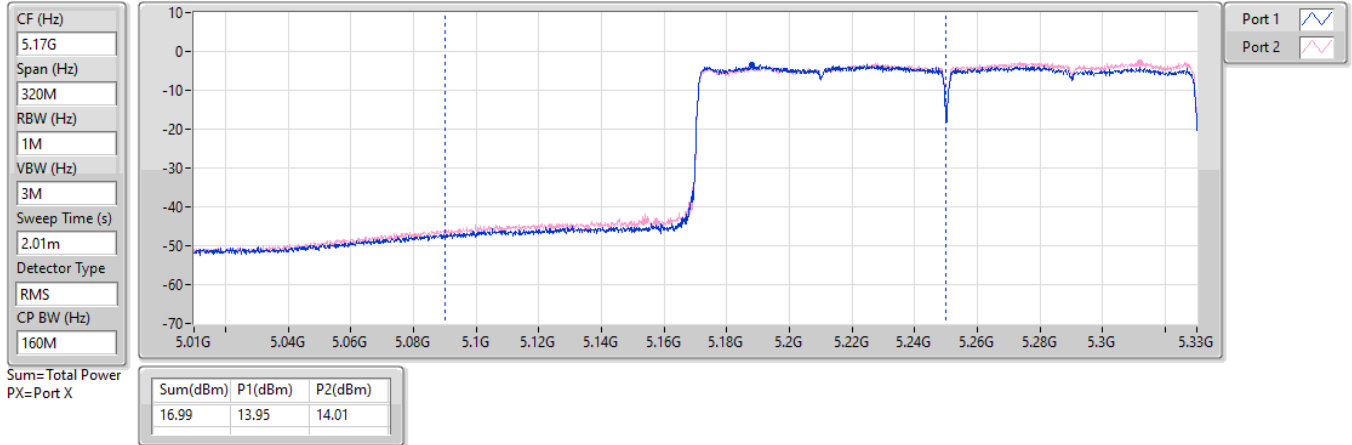


5.25-5.35GHz_802.11be EHT160_Nss2,(MCS0)_2TX

AV Power

5250MHz Straddle 5.25-5.35GHz_TX

23/05/2025

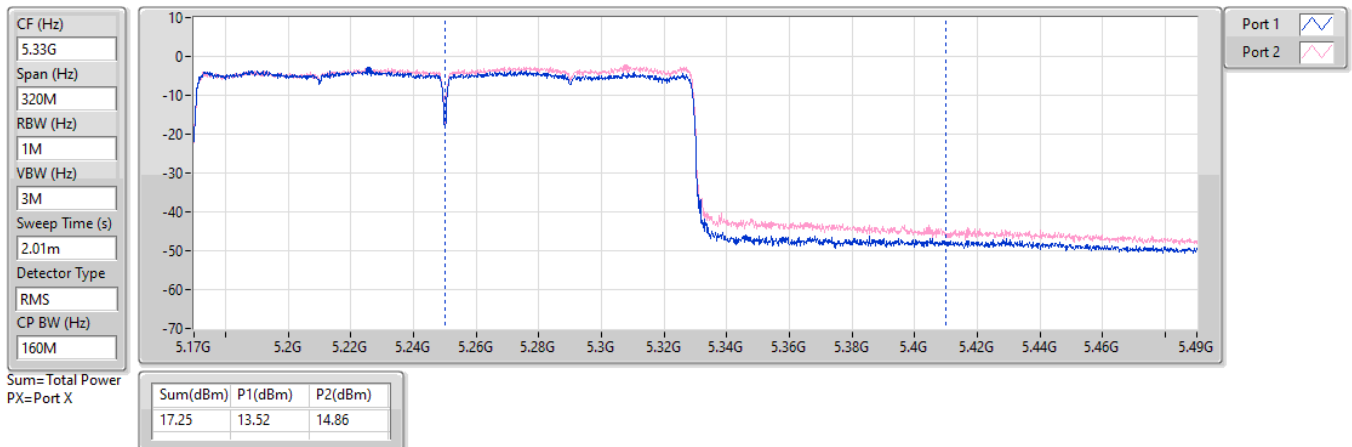



Average Power Non-Beamforming
Radio 2 1T1S Patch Outdoor 30 Degree Gain

Appendix C.30

Summary

Mode	Total Power (dBm)	Total Power (W)
5.15-5.25GHz	-	-
802.11a_Nss1,(6Mbps)_1TX	16.85	0.04842
802.11be EHT20_Nss1,(MCS0)_1TX	16.87	0.04864
802.11be EHT40_Nss1,(MCS0)_1TX	16.72	0.04699
802.11be EHT80_Nss1,(MCS0)_1TX	16.88	0.04875
802.11be EHT160_Nss1,(MCS0)_1TX	14.52	0.02831
5.25-5.35GHz	-	-
802.11a_Nss1,(6Mbps)_1TX	17.49	0.05610
802.11be EHT20_Nss1,(MCS0)_1TX	17.91	0.06180
802.11be EHT40_Nss1,(MCS0)_1TX	18.26	0.06699
802.11be EHT80_Nss1,(MCS0)_1TX	17.95	0.06237
802.11be EHT160_Nss1,(MCS0)_1TX	14.19	0.02624
5.47-5.725GHz	-	-
802.11a_Nss1,(6Mbps)_1TX	17.81	0.06039
802.11be EHT20_Nss1,(MCS0)_1TX	17.64	0.05808
802.11be EHT40_Nss1,(MCS0)_1TX	18.15	0.06531
802.11be EHT80_Nss1,(MCS0)_1TX	17.73	0.05929
802.11be EHT160_Nss1,(MCS0)_1TX	15.57	0.03606
5.725-5.85GHz	-	-
802.11a_Nss1,(6Mbps)_1TX	18.51	0.07096
802.11be EHT20_Nss1,(MCS0)_1TX	18.61	0.07261
802.11be EHT40_Nss1,(MCS0)_1TX	18.03	0.06353
802.11be EHT80_Nss1,(MCS0)_1TX	17.63	0.05794



**Average Power Non-Beamforming
Radio 2 1T1S Patch Outdoor 30 Degree Gain**

Appendix C.30

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Total Power (dBm)	Power Limit (dBm)
802.11a_Nss1,(6Mbps)_1TX	-	-	-	-	-
5180MHz	Pass	3.60	16.81	16.81	30.00
5200MHz	Pass	3.60	16.81	16.81	30.00
5240MHz	Pass	3.60	16.85	16.85	30.00
5260MHz	Pass	10.52	17.49	17.49	19.46
5300MHz	Pass	10.52	17.46	17.46	19.46
5320MHz	Pass	10.52	17.30	17.30	19.46
5500MHz	Pass	10.33	17.47	17.47	19.65
5580MHz	Pass	10.33	17.35	17.35	19.65
5700MHz	Pass	10.33	17.81	17.81	19.65
5720MHz Straddle 5.47-5.725GHz	Pass	10.33	16.45	16.45	18.54
5720MHz Straddle 5.725-5.85GHz	Pass	10.28	10.39	10.39	25.72
5745MHz	Pass	10.28	18.51	18.51	25.72
5785MHz	Pass	10.28	17.63	17.63	25.72
5825MHz	Pass	10.28	16.70	16.70	25.72
802.11be EHT20_Nss1,(MCS0)_1TX	-	-	-	-	-
5180MHz	Pass	3.60	16.87	16.87	30.00
5200MHz	Pass	3.60	16.83	16.83	30.00
5240MHz	Pass	3.60	16.82	16.82	30.00
5260MHz	Pass	10.52	17.91	17.91	19.46
5300MHz	Pass	10.52	17.60	17.60	19.46
5320MHz	Pass	10.52	17.38	17.38	19.46
5500MHz	Pass	10.33	17.64	17.64	19.65
5580MHz	Pass	10.33	17.43	17.43	19.65
5700MHz	Pass	10.33	14.44	14.44	19.65
5720MHz Straddle 5.47-5.725GHz	Pass	10.33	16.69	16.69	18.70
5720MHz Straddle 5.725-5.85GHz	Pass	10.28	11.53	11.53	25.72
5745MHz	Pass	10.28	18.61	18.61	25.72
5785MHz	Pass	10.28	17.86	17.86	25.72
5825MHz	Pass	10.28	16.94	16.94	25.72
802.11be EHT40_Nss1,(MCS0)_1TX	-	-	-	-	-
5190MHz	Pass	3.60	16.72	16.72	30.00
5230MHz	Pass	3.60	16.71	16.71	30.00
5270MHz	Pass	10.52	18.26	18.26	19.46
5310MHz	Pass	10.52	17.60	17.60	19.46
5510MHz	Pass	10.33	18.15	18.15	19.65
5550MHz	Pass	10.33	18.04	18.04	19.65
5670MHz	Pass	10.33	16.98	16.98	19.65
5710MHz Straddle 5.47-5.725GHz	Pass	10.33	18.08	18.08	19.65
5710MHz Straddle 5.725-5.85GHz	Pass	10.28	8.61	8.61	25.72
5755MHz	Pass	10.28	18.03	18.03	25.72
5795MHz	Pass	10.28	17.05	17.05	25.72
802.11be EHT80_Nss1,(MCS0)_1TX	-	-	-	-	-
5210MHz	Pass	3.60	16.88	16.88	30.00
5290MHz	Pass	10.52	17.95	17.95	19.46
5530MHz	Pass	10.33	17.66	17.66	19.65
5610MHz	Pass	10.33	17.73	17.73	19.65
5690MHz Straddle 5.47-5.725GHz	Pass	10.33	17.66	17.66	19.65
5690MHz Straddle 5.725-5.85GHz	Pass	10.28	4.38	4.38	25.72
5775MHz	Pass	10.28	17.63	17.63	25.72
802.11be EHT160_Nss1,(MCS0)_1TX	-	-	-	-	-
5250MHz Straddle 5.15-5.25GHz	Pass	3.60	14.52	14.52	30.00
5250MHz Straddle 5.25-5.35GHz	Pass	10.52	14.19	14.19	19.46
5570MHz	Pass	10.33	15.57	15.57	19.65

DG = Directional Gain; Port X = Port X output power
Inf = There's no restriction for the limit.



Average Power Non-Beamforming
Radio 2_1T1S_Patch_Outdoor_30 Degree Gain


Appendix C.30

5.15-5.25GHz_802.11be EHT160_Nss1,(MCS0)_1TX

AV Power

5250MHz Straddle 5.15-5.25GHz_TX

20/05/2025

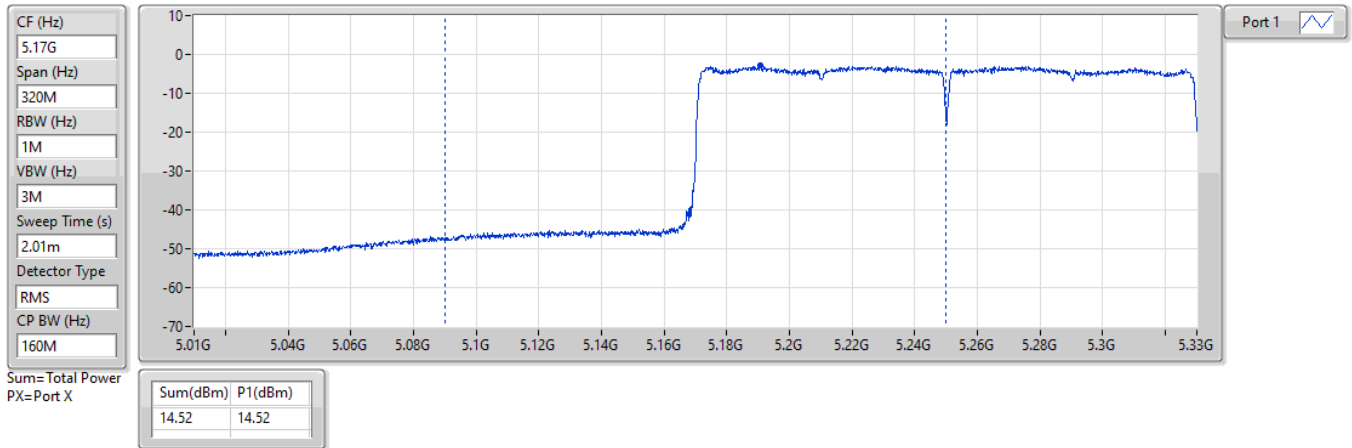


5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0)_1TX

AV Power

5250MHz Straddle 5.25-5.35GHz_TX

20/05/2025

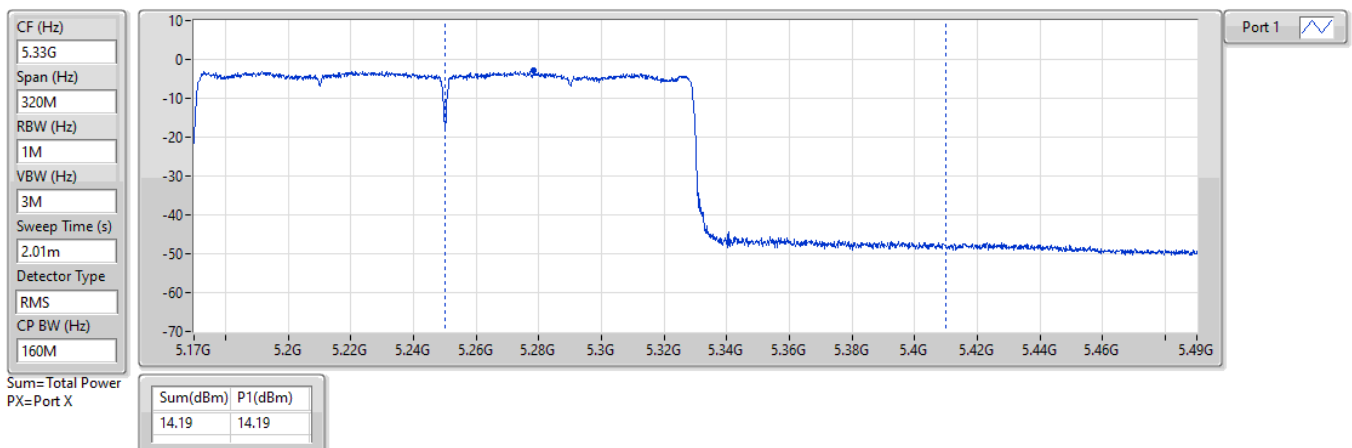



**Average Power Non-Beamforming
Radio 2 2T1S Patch Outdoor 30 Degree Gain**

Appendix C.31

Summary

Mode	Total Power (dBm)	Total Power (W)
5.15-5.25GHz	-	-
802.11a_Nss1,(6Mbps)_2TX	16.82	0.04808
802.11be EHT20_Nss1,(MCS0)_2TX	16.83	0.04819
802.11be EHT40_Nss1,(MCS0)_2TX	16.84	0.04831
802.11be EHT80_Nss1,(MCS0)_2TX	16.69	0.04667
802.11be EHT160_Nss1,(MCS0)_2TX	15.83	0.03828
5.25-5.35GHz	-	-
802.11a_Nss1,(6Mbps)_2TX	16.82	0.04808
802.11be EHT20_Nss1,(MCS0)_2TX	17.28	0.05346
802.11be EHT40_Nss1,(MCS0)_2TX	18.85	0.07674
802.11be EHT80_Nss1,(MCS0)_2TX	18.65	0.07328
802.11be EHT160_Nss1,(MCS0)_2TX	16.05	0.04027
5.47-5.725GHz	-	-
802.11a_Nss1,(6Mbps)_2TX	16.73	0.04710
802.11be EHT20_Nss1,(MCS0)_2TX	17.36	0.05445
802.11be EHT40_Nss1,(MCS0)_2TX	18.88	0.07727
802.11be EHT80_Nss1,(MCS0)_2TX	18.75	0.07499
802.11be EHT160_Nss1,(MCS0)_2TX	18.01	0.06324
5.725-5.85GHz	-	-
802.11a_Nss1,(6Mbps)_2TX	21.82	0.15205
802.11be EHT20_Nss1,(MCS0)_2TX	22.01	0.15885
802.11be EHT40_Nss1,(MCS0)_2TX	21.53	0.14223
802.11be EHT80_Nss1,(MCS0)_2TX	21.06	0.12764



**Average Power Non-Beamforming
Radio 2 2T1S Patch Outdoor 30 Degree Gain**

Appendix C.31

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Total Power (dBm)	Power Limit (dBm)
802.11a_Nss1,(6Mbps)_2TX	-	-	-	-	-	-
5180MHz	Pass	3.60	13.61	13.78	16.71	30.00
5200MHz	Pass	3.60	13.73	13.79	16.77	30.00
5240MHz	Pass	3.60	13.84	13.78	16.82	30.00
5260MHz	Pass	10.61	13.34	13.66	16.51	19.37
5300MHz	Pass	10.61	13.43	13.84	16.65	19.37
5320MHz	Pass	10.61	13.75	13.86	16.82	19.37
5500MHz	Pass	10.58	13.38	13.71	16.56	19.40
5580MHz	Pass	10.58	13.53	13.91	16.73	19.40
5700MHz	Pass	10.58	13.34	13.76	16.57	19.40
5720MHz Straddle 5.47-5.725GHz	Pass	10.58	12.16	12.87	15.54	18.38
5720MHz Straddle 5.725-5.85GHz	Pass	10.52	6.11	6.86	9.51	25.48
5745MHz	Pass	10.52	18.36	19.21	21.82	25.48
5785MHz	Pass	10.52	17.71	18.21	20.98	25.48
5825MHz	Pass	10.52	16.69	17.28	20.01	25.48
802.11be EHT20_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5180MHz	Pass	3.60	13.68	13.95	16.83	30.00
5200MHz	Pass	3.60	13.66	13.76	16.72	30.00
5240MHz	Pass	3.60	13.70	13.80	16.76	30.00
5260MHz	Pass	10.61	14.15	14.37	17.27	19.37
5300MHz	Pass	10.61	14.09	14.40	17.26	19.37
5320MHz	Pass	10.61	14.14	14.40	17.28	19.37
5500MHz	Pass	10.58	13.89	14.48	17.21	19.40
5580MHz	Pass	10.58	14.03	14.65	17.36	19.40
5700MHz	Pass	10.58	13.64	14.00	16.83	19.40
5720MHz Straddle 5.47-5.725GHz	Pass	10.58	12.69	13.31	16.02	18.96
5720MHz Straddle 5.725-5.85GHz	Pass	10.52	7.53	8.34	10.96	25.48
5745MHz	Pass	10.52	18.69	19.28	22.01	25.48
5785MHz	Pass	10.52	17.76	17.47	20.63	25.48
5825MHz	Pass	10.52	16.82	17.57	20.22	25.48
802.11be EHT40_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5190MHz	Pass	3.60	13.82	13.84	16.84	30.00
5230MHz	Pass	3.60	13.88	13.78	16.84	30.00
5270MHz	Pass	10.61	15.68	15.99	18.85	19.37
5310MHz	Pass	10.61	15.70	15.98	18.85	19.37
5510MHz	Pass	10.58	15.22	16.12	18.70	19.40
5550MHz	Pass	10.58	15.50	16.21	18.88	19.40
5670MHz	Pass	10.58	15.48	16.03	18.77	19.40
5710MHz Straddle 5.47-5.725GHz	Pass	10.58	15.35	15.88	18.63	19.40
5710MHz Straddle 5.725-5.85GHz	Pass	10.52	5.78	6.40	9.11	25.48
5755MHz	Pass	10.52	17.68	19.23	21.53	25.48
5795MHz	Pass	10.52	16.77	18.11	20.50	25.48
802.11be EHT80_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5210MHz	Pass	3.60	13.56	13.80	16.69	30.00
5290MHz	Pass	10.61	15.49	15.78	18.65	19.37
5530MHz	Pass	10.58	15.46	16.00	18.75	19.40
5610MHz	Pass	10.58	15.59	15.83	18.72	19.40
5690MHz Straddle 5.47-5.725GHz	Pass	10.58	15.39	16.05	18.74	19.40
5690MHz Straddle 5.725-5.85GHz	Pass	10.52	2.05	2.98	5.55	25.48
5775MHz	Pass	10.52	17.55	18.50	21.06	25.48
802.11be EHT160_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5250MHz Straddle 5.15-5.25GHz	Pass	3.60	12.96	12.67	15.83	30.00
5250MHz Straddle 5.25-5.35GHz	Pass	10.61	12.65	13.40	16.05	19.37
5570MHz	Pass	10.58	14.77	15.22	18.01	19.40


DG = Directional Gain; Port X = Port X output power
Inf = There's no restriction for the limit.

5.15-5.25GHz_802.11be EHT160_Nss1,(MCS0)_2TX

AV Power

5250MHz Straddle 5.15-5.25GHz_TX

23/05/2025

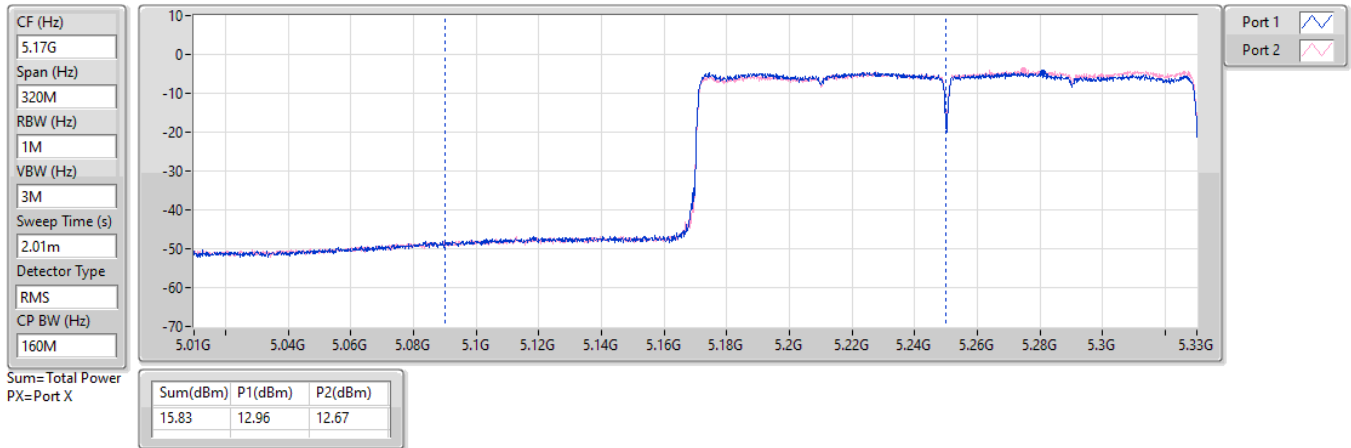


5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0)_2TX

AV Power

5250MHz Straddle 5.25-5.35GHz_TX

23/05/2025

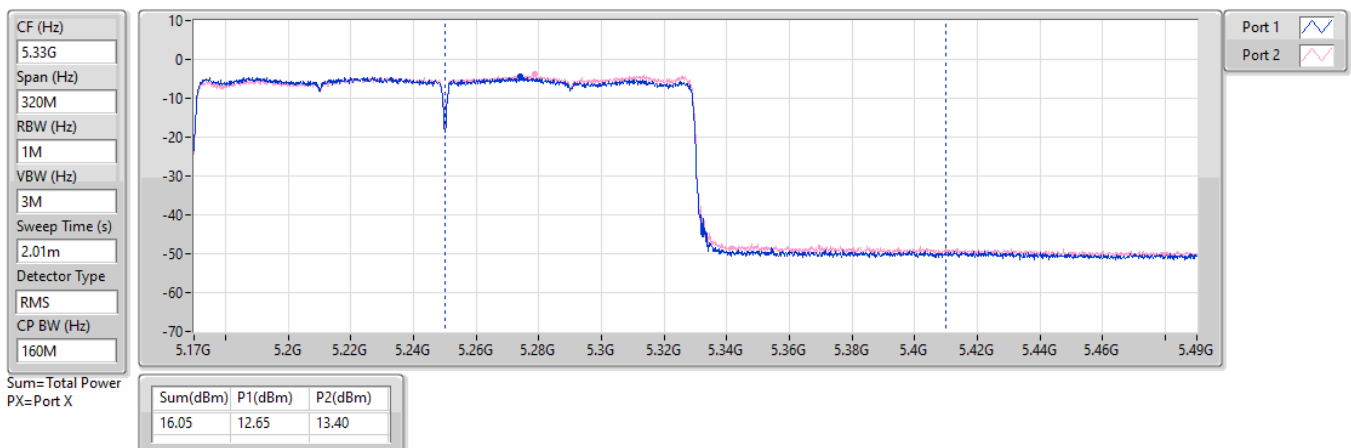



**Average Power Non-Beamforming
Radio 2 2T2S Patch Outdoor 30 Degree Gain**

Appendix C.32

Summary

Mode	Total Power (dBm)	Total Power (W)
5.15-5.25GHz	-	-
802.11be EHT20_Nss2,(MCS0)_2TX	16.78	0.04764
802.11be EHT40_Nss2,(MCS0)_2TX	16.81	0.04797
802.11be EHT80_Nss2,(MCS0)_2TX	16.80	0.04786
802.11be EHT160_Nss2,(MCS0)_2TX	16.02	0.03999
5.25-5.35GHz	-	-
802.11be EHT20_Nss2,(MCS0)_2TX	18.79	0.07568
802.11be EHT40_Nss2,(MCS0)_2TX	18.82	0.07621
802.11be EHT80_Nss2,(MCS0)_2TX	18.80	0.07586
802.11be EHT160_Nss2,(MCS0)_2TX	16.24	0.04207
5.47-5.725GHz	-	-
802.11be EHT20_Nss2,(MCS0)_2TX	18.98	0.07907
802.11be EHT40_Nss2,(MCS0)_2TX	18.80	0.07586
802.11be EHT80_Nss2,(MCS0)_2TX	18.89	0.07745
802.11be EHT160_Nss2,(MCS0)_2TX	17.39	0.05483
5.725-5.85GHz	-	-
802.11be EHT20_Nss2,(MCS0)_2TX	22.05	0.16032
802.11be EHT40_Nss2,(MCS0)_2TX	21.74	0.14928
802.11be EHT80_Nss2,(MCS0)_2TX	21.00	0.12589



**Average Power Non-Beamforming
Radio 2 2T2S Patch Outdoor 30 Degree Gain**

Appendix C.32

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Total Power (dBm)	Power Limit (dBm)
802.11be EHT20_Nss2,(MCS0)_2TX	-	-	-	-	-	-
5180MHz	Pass	3.60	13.56	13.80	16.69	30.00
5200MHz	Pass	3.60	13.70	13.62	16.67	30.00
5240MHz	Pass	3.60	13.70	13.84	16.78	30.00
5260MHz	Pass	10.61	15.36	16.17	18.79	19.37
5300MHz	Pass	10.61	15.32	16.13	18.75	19.37
5320MHz	Pass	10.61	15.31	16.16	18.77	19.37
5500MHz	Pass	10.58	15.66	16.26	18.98	19.40
5580MHz	Pass	10.58	15.68	16.19	18.95	19.40
5700MHz	Pass	10.58	12.81	13.28	16.06	19.40
5720MHz Straddle 5.47-5.725GHz	Pass	10.58	14.58	15.32	17.98	18.52
5720MHz Straddle 5.725-5.85GHz	Pass	10.52	9.43	10.22	12.85	25.48
5745MHz	Pass	10.52	18.59	19.44	22.05	25.48
5785MHz	Pass	10.52	17.82	18.45	21.16	25.48
5825MHz	Pass	10.52	16.77	17.11	19.95	25.48
802.11be EHT40_Nss2,(MCS0)_2TX	-	-	-	-	-	-
5190MHz	Pass	3.60	13.82	13.66	16.75	30.00
5230MHz	Pass	3.60	13.84	13.75	16.81	30.00
5270MHz	Pass	10.61	15.63	15.99	18.82	19.37
5310MHz	Pass	10.61	15.42	15.83	18.64	19.37
5510MHz	Pass	10.58	15.32	16.15	18.77	19.40
5550MHz	Pass	10.58	15.32	16.14	18.76	19.40
5670MHz	Pass	10.58	14.59	14.96	17.79	19.40
5710MHz Straddle 5.47-5.725GHz	Pass	10.58	15.37	16.18	18.80	19.40
5710MHz Straddle 5.725-5.85GHz	Pass	10.52	5.76	6.61	9.22	25.48
5755MHz	Pass	10.52	18.12	19.26	21.74	25.48
5795MHz	Pass	10.52	17.07	18.17	20.67	25.48
802.11be EHT80_Nss2,(MCS0)_2TX	-	-	-	-	-	-
5210MHz	Pass	3.60	13.68	13.90	16.80	30.00
5290MHz	Pass	10.61	15.60	15.98	18.80	19.37
5530MHz	Pass	10.58	15.51	16.16	18.86	19.40
5610MHz	Pass	10.58	15.54	16.03	18.80	19.40
5690MHz Straddle 5.47-5.725GHz	Pass	10.58	15.52	16.22	18.89	19.40
5690MHz Straddle 5.725-5.85GHz	Pass	10.52	2.23	2.98	5.63	25.48
5775MHz	Pass	10.52	17.52	18.41	21.00	25.48
802.11be EHT160_Nss2,(MCS0)_2TX	-	-	-	-	-	-
5250MHz Straddle 5.15-5.25GHz	Pass	3.60	13.12	12.89	16.02	30.00
5250MHz Straddle 5.25-5.35GHz	Pass	10.61	12.77	13.64	16.24	19.37
5570MHz	Pass	10.58	14.24	14.52	17.39	19.40


DG = Directional Gain; Port X = Port X output power
Inf = There's no restriction for the limit.

5.15-5.25GHz_802.11be EHT160_Nss2,(MCS0)_2TX

AV Power

5250MHz Straddle 5.15-5.25GHz_TX

23/05/2025

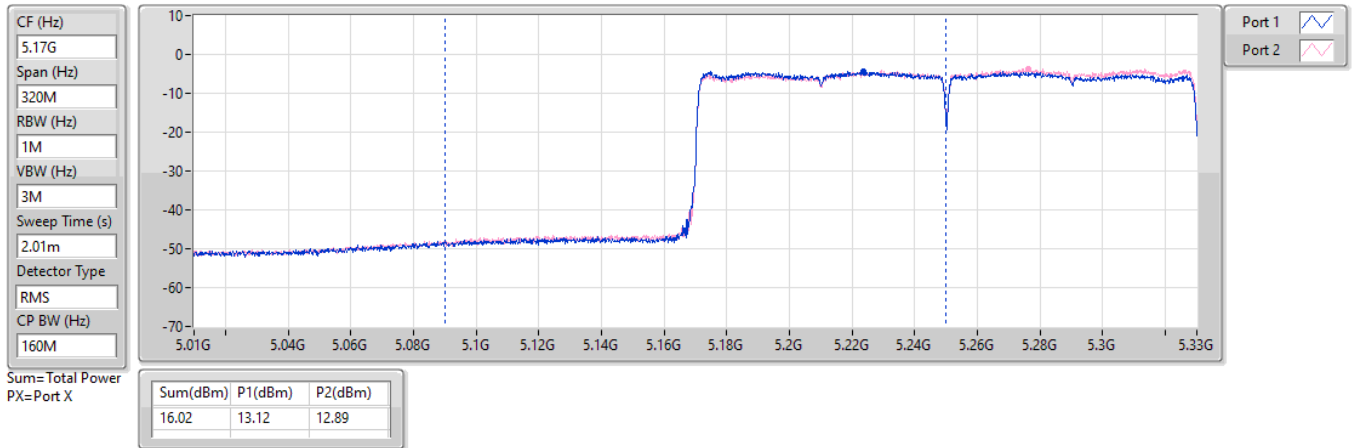


5.25-5.35GHz_802.11be EHT160_Nss2,(MCS0)_2TX

AV Power

5250MHz Straddle 5.25-5.35GHz_TX

23/05/2025

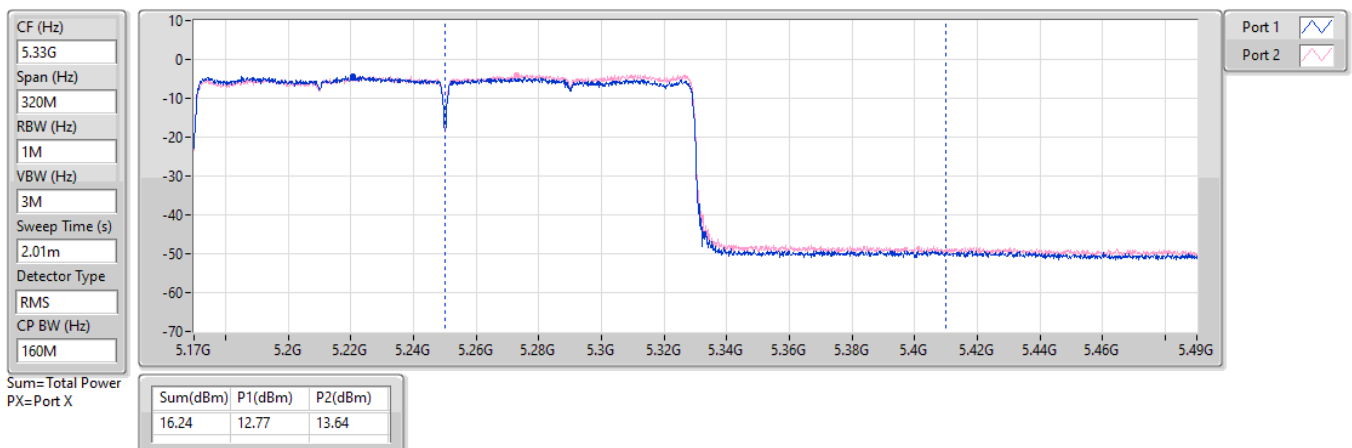


5.47-5.725GHz_802.11be EHT40_Nss2,(MCS0)_2TX

AV Power

5710MHz Straddle 5.47-5.725GHz_TX

20/05/2025

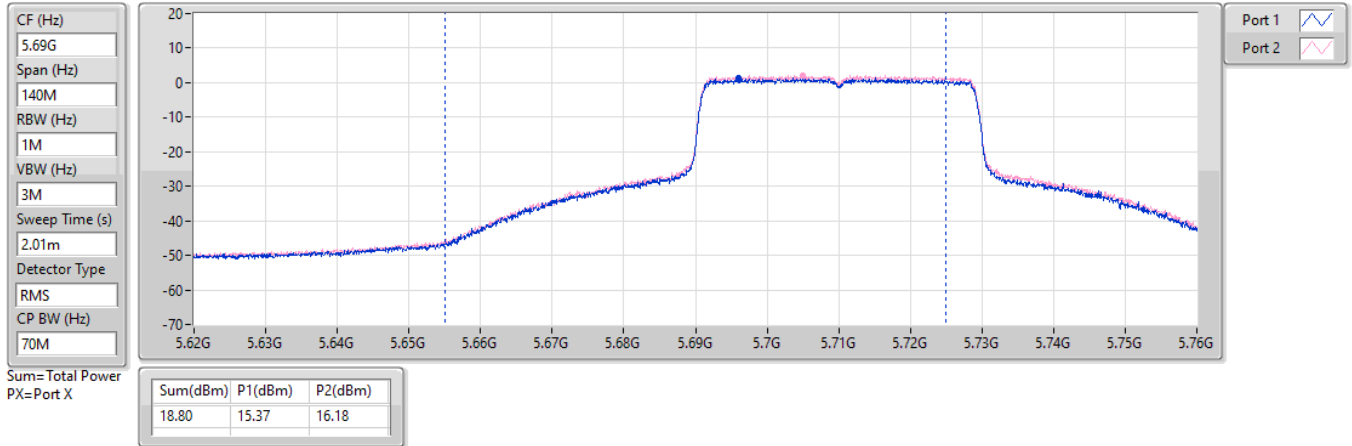


5.47-5.725GHz_802.11be EHT80_Nss2,(MCS0)_2TX

AV Power

5690MHz Straddle 5.47-5.725GHz_TX

20/05/2025

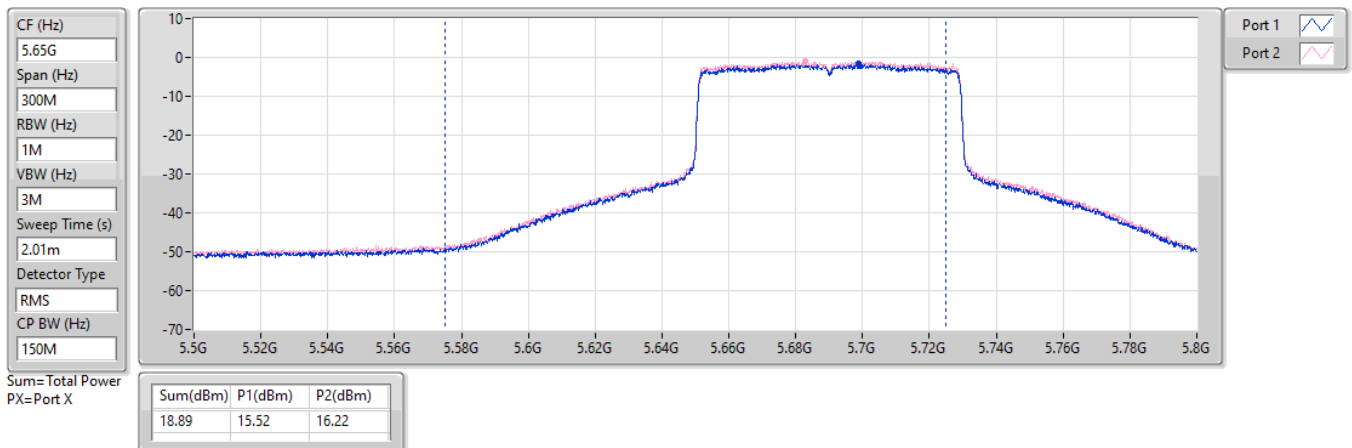



**Average Power_Non-Beamforming_
Radio 3_1T1S_Dipole_Outdoor_30 Degree Gain**

Appendix C.33

Summary

Mode	Total Power (dBm)	Total Power (W)
5.15-5.25GHz	-	-
802.11a_Nss1,(6Mbps)_1TX	17.08	0.05105
802.11be EHT20_Nss1,(MCS0)_1TX	17.15	0.05188
802.11be EHT40_Nss1,(MCS0)_1TX	16.99	0.05000
802.11be EHT80_Nss1,(MCS0)_1TX	17.03	0.05047
5.25-5.35GHz	-	-
802.11a_Nss1,(6Mbps)_1TX	18.62	0.07278
802.11be EHT20_Nss1,(MCS0)_1TX	18.88	0.07727
802.11be EHT40_Nss1,(MCS0)_1TX	18.68	0.07379
802.11be EHT80_Nss1,(MCS0)_1TX	18.29	0.06745



**Average Power_Non-Beamforming_
Radio 3_1T1S_Dipole_Outdoor_30 Degree Gain**

Appendix C.33

Result

	Result	DG (dBi)	Port 1 (dBm)	Total Power (dBm)	Power Limit (dBm)
802.11a_Nss1,(6Mbps)_1TX	-	-	-	-	-
5180MHz	Pass	3.33	16.92	16.92	30.00
5200MHz	Pass	3.33	17.08	17.08	30.00
5240MHz	Pass	3.33	17.08	17.08	30.00
5260MHz	Pass	3.36	17.91	17.91	23.98
5300MHz	Pass	3.36	18.62	18.62	23.98
5320MHz	Pass	3.36	17.99	17.99	23.98
802.11be EHT20_Nss1,(MCS0)_1TX	-	-	-	-	-
5180MHz	Pass	3.33	16.99	16.99	30.00
5200MHz	Pass	3.33	17.12	17.12	30.00
5240MHz	Pass	3.33	17.15	17.15	30.00
5260MHz	Pass	3.36	18.08	18.08	23.98
5300MHz	Pass	3.36	18.88	18.88	23.98
5320MHz	Pass	3.36	18.00	18.00	23.98
802.11be EHT40_Nss1,(MCS0)_1TX	-	-	-	-	-
5190MHz	Pass	3.33	16.99	16.99	30.00
5230MHz	Pass	3.33	16.86	16.86	30.00
5270MHz	Pass	3.36	18.58	18.58	23.98
5310MHz	Pass	3.36	18.68	18.68	23.98
802.11be EHT80_Nss1,(MCS0)_1TX	-	-	-	-	-
5210MHz	Pass	3.33	17.03	17.03	30.00
5290MHz	Pass	3.36	18.29	18.29	23.98

DG = Directional Gain; Port X = Port X output power
Inf = There's no restriction for the limit.



**Average Power_Non-Beamforming_
Radio 3_2T1S_Dipole_Outdoor_30 Degree Gain**

Appendix C.34

Summary

Mode	Total Power (dBm)	Total Power (W)	EIRP (dBm)	EIRP (W)
5.15-5.25GHz	-	-	-	-
802.11a_Nss1,(6Mbps)_2TX	17.15	0.05188	20.48/20.48	0.11169/0.111686
802.11be EHT20_Nss1,(MCS0)_2TX	16.99	0.05000	20.32/20.32	0.10765/0.107647
802.11be EHT40_Nss1,(MCS0)_2TX	17.15	0.05188	20.48/20.48	0.11169/0.111686
802.11be EHT80_Nss1,(MCS0)_2TX	17.11	0.05140	20.44/20.44	0.11066/0.110662
5.25-5.35GHz	-	-	-	-
802.11a_Nss1,(6Mbps)_2TX	21.82	0.15205	25.18	0.32961
802.11be EHT20_Nss1,(MCS0)_2TX	21.92	0.15560	25.28	0.33729
802.11be EHT40_Nss1,(MCS0)_2TX	21.72	0.14859	25.08	0.32211
802.11be EHT80_Nss1,(MCS0)_2TX	21.22	0.13243	24.58	0.28708



**Average Power_Non-Beamforming_
Radio 3_2T1S_Dipole_Outdoor_30 Degree Gain**

Appendix C.34

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Total Power (dBm)	Power Limit (dBm)
802.11a_Nss1,(6Mbps)_2TX	-	-	-	-	-	-
5180MHz	Pass	3.33	14.00	14.00	17.01	30.00
5200MHz	Pass	3.33	13.78	13.98	16.89	30.00
5240MHz	Pass	3.33	14.24	14.04	17.15	30.00
5260MHz	Pass	3.36	17.90	18.09	21.01	23.98
5300MHz	Pass	3.36	18.62	18.99	21.82	23.98
5320MHz	Pass	3.36	17.87	18.40	21.15	23.98
802.11be EHT20_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5180MHz	Pass	3.33	13.85	14.05	16.96	30.00
5200MHz	Pass	3.33	13.81	14.15	16.99	30.00
5240MHz	Pass	3.33	13.94	14.01	16.99	30.00
5260MHz	Pass	3.36	18.10	18.04	21.08	23.98
5300MHz	Pass	3.36	18.83	18.98	21.92	23.98
5320MHz	Pass	3.36	17.98	18.54	21.28	23.98
802.11be EHT40_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5190MHz	Pass	3.33	14.10	14.17	17.15	30.00
5230MHz	Pass	3.33	14.09	14.19	17.15	30.00
5270MHz	Pass	3.36	18.70	18.39	21.56	23.98
5310MHz	Pass	3.36	18.70	18.71	21.72	23.98
802.11be EHT80_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5210MHz	Pass	3.33	14.00	14.19	17.11	30.00
5290MHz	Pass	3.36	18.18	18.24	21.22	23.98

DG = Directional Gain; Port X = Port X output power
Inf = There's no restriction for the limit.



**Average Power_Non-Beamforming_
Radio 3_2T2S_Dipole_Outdoor_30 Degree Gain**

Appendix C.35

Summary

Mode	Total Power (dBm)	Total Power (W)
5.15-5.25GHz	-	-
802.11be EHT20_Nss2,(MCS0)_2TX	17.13	0.05164
802.11be EHT40_Nss2,(MCS0)_2TX	16.97	0.04977
802.11be EHT80_Nss2,(MCS0)_2TX	17.03	0.05047
5.25-5.35GHz	-	-
802.11be EHT20_Nss2,(MCS0)_2TX	21.80	0.15136
802.11be EHT40_Nss2,(MCS0)_2TX	21.60	0.14454
802.11be EHT80_Nss2,(MCS0)_2TX	21.04	0.12706



**Average Power_Non-Beamforming_
Radio 3_2T2S_Dipole_Outdoor_30 Degree Gain**

Appendix C.35

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Total Power (dBm)	Power Limit (dBm)
802.11be EHT20_Nss2,(MCS0)_2TX	-	-	-	-	-	-
5180MHz	Pass	3.33	13.98	13.74	16.87	30.00
5200MHz	Pass	3.33	14.02	14.06	17.05	30.00
5240MHz	Pass	3.33	14.16	14.08	17.13	30.00
5260MHz	Pass	3.36	17.91	17.94	20.94	23.98
5300MHz	Pass	3.36	18.72	18.86	21.80	23.98
5320MHz	Pass	3.36	17.90	18.36	21.15	23.98
802.11be EHT40_Nss2,(MCS0)_2TX	-	-	-	-	-	-
5190MHz	Pass	3.33	13.92	14.00	16.97	30.00
5230MHz	Pass	3.33	13.84	13.72	16.79	30.00
5270MHz	Pass	3.36	18.46	18.28	21.38	23.98
5310MHz	Pass	3.36	18.59	18.58	21.60	23.98
802.11be EHT80_Nss2,(MCS0)_2TX	-	-	-	-	-	-
5210MHz	Pass	3.33	13.92	14.11	17.03	30.00
5290MHz	Pass	3.36	17.98	18.08	21.04	23.98

DG = Directional Gain; Port X = Port X output power
Inf = There's no restriction for the limit.



Average Power Non-Beamforming
Radio 3_1T1S_Patch_Outdoor_30 Degree Gain

Appendix C.36

Summary

Mode	Total Power (dBm)	Total Power (W)
5.15-5.25GHz	-	-
802.11a_Nss1,(6Mbps)_1TX	16.87	0.04864
802.11be EHT20_Nss1,(MCS0)_1TX	16.80	0.04786
802.11be EHT40_Nss1,(MCS0)_1TX	16.88	0.04875
802.11be EHT80_Nss1,(MCS0)_1TX	16.17	0.04140
5.25-5.35GHz	-	-
802.11a_Nss1,(6Mbps)_1TX	18.62	0.07278
802.11be EHT20_Nss1,(MCS0)_1TX	18.54	0.07145
802.11be EHT40_Nss1,(MCS0)_1TX	18.68	0.07379
802.11be EHT80_Nss1,(MCS0)_1TX	17.41	0.05508



Average Power Non-Beamforming
Radio 3_1T1S_Patch_Outdoor_30 Degree Gain

Appendix C.36

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Total Power (dBm)	Power Limit (dBm)
802.11a_Nss1,(6Mbps)_1TX	-	-	-	-	-
5180MHz	Pass	3.60	16.87	16.87	30.00
5200MHz	Pass	3.60	16.68	16.68	30.00
5240MHz	Pass	3.60	16.77	16.77	30.00
5260MHz	Pass	10.71	17.91	17.91	19.27
5300MHz	Pass	10.71	18.62	18.62	19.27
5320MHz	Pass	10.71	17.99	17.99	19.27
802.11be EHT20_Nss1,(MCS0)_1TX	-	-	-	-	-
5180MHz	Pass	3.60	16.75	16.75	30.00
5200MHz	Pass	3.60	16.77	16.77	30.00
5240MHz	Pass	3.60	16.80	16.80	30.00
5260MHz	Pass	10.71	18.08	18.08	19.27
5300MHz	Pass	10.71	18.54	18.54	19.27
5320MHz	Pass	10.71	18.00	18.00	19.27
802.11be EHT40_Nss1,(MCS0)_1TX	-	-	-	-	-
5190MHz	Pass	3.60	16.88	16.88	30.00
5230MHz	Pass	3.60	16.84	16.84	30.00
5270MHz	Pass	10.71	18.58	18.58	19.27
5310MHz	Pass	10.71	18.68	18.68	19.27
802.11be EHT80_Nss1,(MCS0)_1TX	-	-	-	-	-
5210MHz	Pass	3.60	16.17	16.17	30.00
5290MHz	Pass	10.71	17.41	17.41	19.27

DG = Directional Gain; Port X = Port X output power
Inf = There's no restriction for the limit.



**Average Power_Non-Beamforming_
Radio 3_2T1S_Patch_Outdoor_30 Degree Gain**

Appendix C.37

Summary

Mode	Total Power (dBm)	Total Power (W)
5.15-5.25GHz	-	-
802.11a_Nss1,(6Mbps)_2TX	16.88	0.04875
802.11be EHT20_Nss1,(MCS0)_2TX	16.88	0.04875
802.11be EHT40_Nss1,(MCS0)_2TX	16.78	0.04764
802.11be EHT80_Nss1,(MCS0)_2TX	16.61	0.04581
5.25-5.35GHz	-	-
802.11a_Nss1,(6Mbps)_2TX	16.62	0.04592
802.11be EHT20_Nss1,(MCS0)_2TX	17.13	0.05164
802.11be EHT40_Nss1,(MCS0)_2TX	18.69	0.07396
802.11be EHT80_Nss1,(MCS0)_2TX	18.51	0.07096



Average Power_Non-Beamforming_ Radio 3_2T1S_Patch_Outdoor_30 Degree Gain

Appendix C.37

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Total Power (dBm)	Power Limit (dBm)
802.11a_Nss1,(6Mbps)_2TX	-	-	-	-	-	-
5180MHz	Pass	3.60	13.84	13.69	16.78	30.00
5200MHz	Pass	3.60	13.77	13.96	16.88	30.00
5240MHz	Pass	3.60	13.76	13.71	16.75	30.00
5260MHz	Pass	10.71	13.59	13.62	16.62	19.27
5300MHz	Pass	10.71	13.39	13.47	16.44	19.27
5320MHz	Pass	10.71	12.97	13.53	16.27	19.27
802.11be EHT20_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5180MHz	Pass	3.60	13.96	13.77	16.88	30.00
5200MHz	Pass	3.60	13.66	13.88	16.78	30.00
5240MHz	Pass	3.60	13.83	13.83	16.84	30.00
5260MHz	Pass	10.71	13.93	14.14	17.05	19.27
5300MHz	Pass	10.71	14.01	14.23	17.13	19.27
5320MHz	Pass	10.71	13.73	14.16	16.96	19.27
802.11be EHT40_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5190MHz	Pass	3.60	13.75	13.79	16.78	30.00
5230MHz	Pass	3.60	13.61	13.64	16.64	30.00
5270MHz	Pass	10.71	15.75	15.60	18.69	19.27
5310MHz	Pass	10.71	15.67	15.57	18.63	19.27
802.11be EHT80_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5210MHz	Pass	3.60	13.64	13.55	16.61	30.00
5290MHz	Pass	10.71	15.46	15.54	18.51	19.27

DG = Directional Gain; Port X = Port X output power
Inf = There's no restriction for the limit.



**Average Power_Non-Beamforming_
Radio 3_2T2S_Patch_Outdoor_30 Degree Gain**

Appendix C.38

Summary

Mode	Total Power (dBm)	Total Power (W)
5.15-5.25GHz	-	-
802.11be EHT20_Nss2,(MCS0)_2TX	16.87	0.04864
802.11be EHT40_Nss2,(MCS0)_2TX	16.81	0.04797
802.11be EHT80_Nss2,(MCS0)_2TX	16.86	0.04853
5.25-5.35GHz	-	-
802.11be EHT20_Nss2,(MCS0)_2TX	18.75	0.07499
802.11be EHT40_Nss2,(MCS0)_2TX	18.74	0.07482
802.11be EHT80_Nss2,(MCS0)_2TX	18.52	0.07112



**Average Power_Non-Beamforming_
Radio 3_2T2S_Patch_Outdoor_30 Degree Gain**

Appendix C.38

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Total Power (dBm)	Power Limit (dBm)
802.11be EHT20_Nss2,(MCS0)_2TX	-	-	-	-	-	-
5180MHz	Pass	3.60	13.60	13.68	16.65	30.00
5200MHz	Pass	3.60	13.78	13.74	16.77	30.00
5240MHz	Pass	3.60	13.88	13.83	16.87	30.00
5260MHz	Pass	10.71	15.65	15.82	18.75	19.27
5300MHz	Pass	10.71	15.61	15.74	18.69	19.27
5320MHz	Pass	10.71	15.50	15.95	18.74	19.27
802.11be EHT40_Nss2,(MCS0)_2TX	-	-	-	-	-	-
5190MHz	Pass	3.60	13.74	13.85	16.81	30.00
5230MHz	Pass	3.60	13.77	13.63	16.71	30.00
5270MHz	Pass	10.71	15.88	15.57	18.74	19.27
5310MHz	Pass	10.71	15.67	15.70	18.70	19.27
802.11be EHT80_Nss2,(MCS0)_2TX	-	-	-	-	-	-
5210MHz	Pass	3.60	13.90	13.80	16.86	30.00
5290MHz	Pass	10.71	15.48	15.53	18.52	19.27

DG = Directional Gain; Port X = Port X output power
Inf = There's no restriction for the limit.



**Average Power_Beamforming_
Radio 2_Dipole_Indoor**

Appendix C.39

Summary

Mode	Total Power (dBm)	Total Power (W)
5.15-5.25GHz	-	-
802.11be EHT20-BF_Nss1,(MCS0)_2TX	21.79	0.15101
802.11be EHT40-BF_Nss1,(MCS0)_2TX	21.99	0.15812
802.11be EHT80-BF_Nss1,(MCS0)_2TX	21.46	0.13996
802.11be EHT160-BF_Nss1,(MCS0)_2TX	17.52	0.05649
5.25-5.35GHz	-	-
802.11be EHT20-BF_Nss1,(MCS0)_2TX	21.19	0.13152
802.11be EHT40-BF_Nss1,(MCS0)_2TX	21.51	0.14158
802.11be EHT80-BF_Nss1,(MCS0)_2TX	21.10	0.12882
802.11be EHT160-BF_Nss1,(MCS0)_2TX	17.76	0.05970
5.47-5.725GHz	-	-
802.11be EHT20-BF_Nss1,(MCS0)_2TX	21.06	0.12764
802.11be EHT40-BF_Nss1,(MCS0)_2TX	21.38	0.13740
802.11be EHT80-BF_Nss1,(MCS0)_2TX	20.92	0.12359
802.11be EHT160-BF_Nss1,(MCS0)_2TX	18.33	0.06808
5.725-5.85GHz	-	-
802.11be EHT20-BF_Nss1,(MCS0)_2TX	22.01	0.15885
802.11be EHT40-BF_Nss1,(MCS0)_2TX	21.53	0.14223
802.11be EHT80-BF_Nss1,(MCS0)_2TX	21.06	0.12764



Average Power_Beamforming_ Radio 2_Dipole_Indoor

Appendix C.39

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Total Power (dBm)	Power Limit (dBm)
802.11be EHT20-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5180MHz	Pass	6.75	17.80	18.84	21.36	29.25
5200MHz	Pass	6.75	18.13	18.84	21.51	29.25
5240MHz	Pass	6.75	18.34	19.17	21.79	29.25
5260MHz	Pass	6.23	17.70	18.62	21.19	23.75
5300MHz	Pass	6.23	17.52	18.17	20.87	23.75
5320MHz	Pass	6.23	17.30	18.08	20.72	23.75
5500MHz	Pass	6.33	17.60	18.46	21.06	23.65
5580MHz	Pass	6.33	17.28	17.89	20.61	23.65
5700MHz	Pass	6.33	15.05	15.51	18.30	23.65
5720MHz Straddle 5.47-5.725GHz	Pass	6.33	16.28	17.22	19.79	22.72
5720MHz Straddle 5.725-5.85GHz	Pass	6.55	11.10	12.07	14.62	29.45
5745MHz	Pass	6.55	18.69	19.28	22.01	29.45
5785MHz	Pass	6.55	17.76	17.47	20.63	29.45
5825MHz	Pass	6.55	16.82	17.57	20.22	29.45
802.11be EHT40-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5190MHz	Pass	6.75	18.45	19.08	21.79	29.25
5230MHz	Pass	6.75	18.72	19.22	21.99	29.25
5270MHz	Pass	6.23	17.81	19.09	21.51	23.75
5310MHz	Pass	6.23	18.19	18.65	21.44	23.75
5510MHz	Pass	6.33	17.76	18.66	21.24	23.65
5550MHz	Pass	6.33	17.92	18.78	21.38	23.65
5670MHz	Pass	6.33	17.73	18.45	21.12	23.65
5710MHz Straddle 5.47-5.725GHz	Pass	6.33	17.68	18.51	21.13	23.65
5710MHz Straddle 5.725-5.85GHz	Pass	6.55	8.03	8.96	11.53	29.45
5755MHz	Pass	6.55	17.68	19.23	21.53	29.45
5795MHz	Pass	6.55	16.77	18.11	20.50	29.45
802.11be EHT80-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5210MHz	Pass	6.75	17.97	18.88	21.46	29.25
5290MHz	Pass	6.23	17.70	18.44	21.10	23.75
5530MHz	Pass	6.33	17.66	18.15	20.92	23.65
5610MHz	Pass	6.33	17.50	18.21	20.88	23.65
5690MHz Straddle 5.47-5.725GHz	Pass	6.33	17.27	17.95	20.63	23.65
5690MHz Straddle 5.725-5.85GHz	Pass	6.55	3.93	4.68	7.33	29.45
5775MHz	Pass	6.55	17.55	18.50	21.06	29.45
802.11be EHT160-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5250MHz Straddle 5.15-5.25GHz	Pass	6.75	14.50	14.52	17.52	29.25
5250MHz Straddle 5.25-5.35GHz	Pass	6.23	14.13	15.30	17.76	23.75
5570MHz	Pass	6.33	15.05	15.58	18.33	23.65


DG = Directional Gain; Port X = Port X output power
Inf = There's no restriction for the limit.

5.15-5.25GHz_802.11be EHT160-BF_Nss1,(MCS0)_2TX

AV Power

5250MHz Straddle 5.15-5.25GHz_TX

20/05/2025

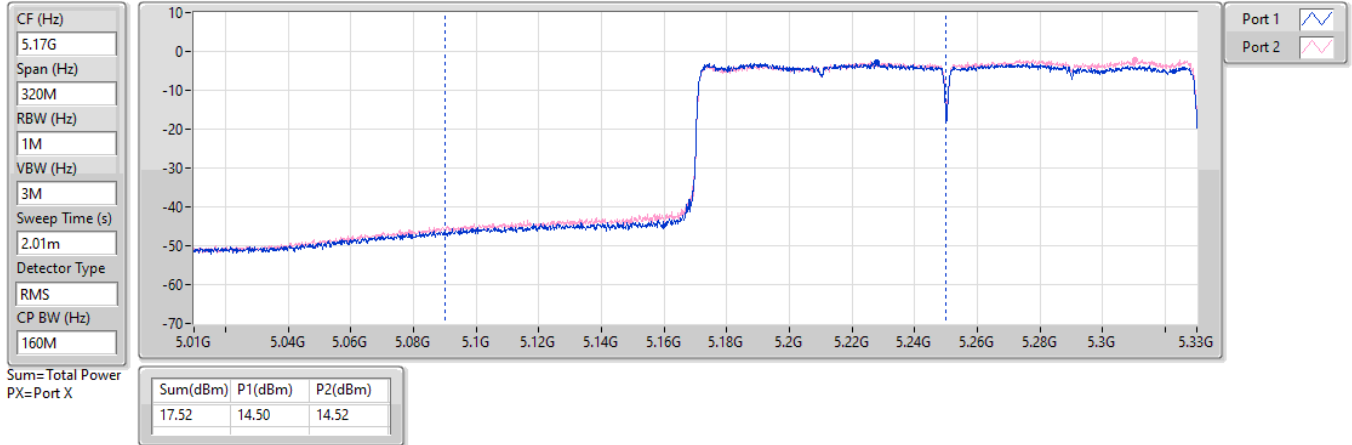


5.25-5.35GHz_802.11be EHT160-BF_Nss1,(MCS0)_2TX

AV Power

5250MHz Straddle 5.25-5.35GHz_TX

20/05/2025

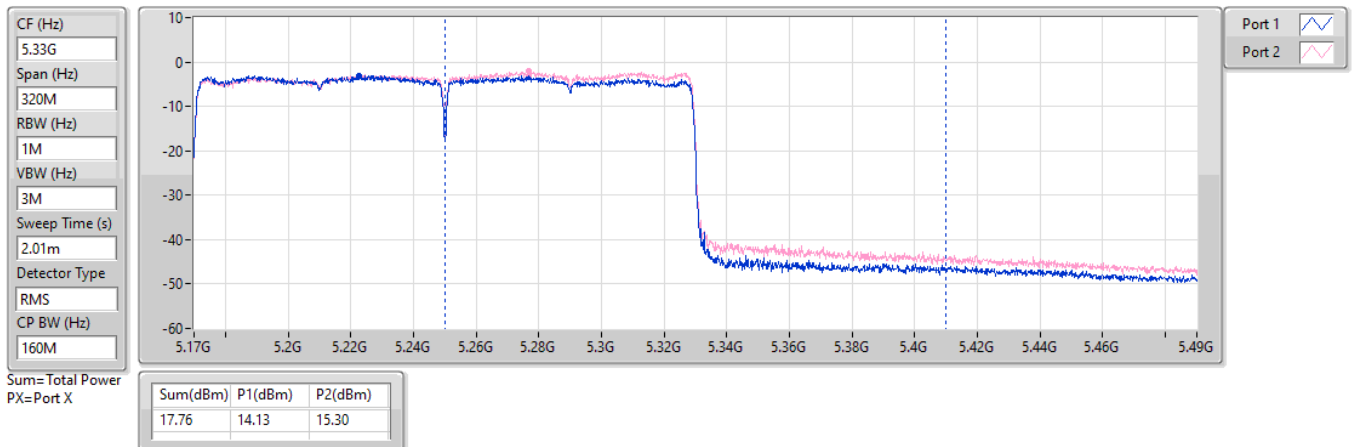



**Average Power_Beamforming_
Radio 2_Patch_Indoor**

Appendix C.40

Summary

Mode	Total Power (dBm)	Total Power (W)
5.15-5.25GHz	-	-
802.11be EHT20-BF_Nss1,(MCS0)_2TX	21.79	0.15101
802.11be EHT40-BF_Nss1,(MCS0)_2TX	21.99	0.15812
802.11be EHT80-BF_Nss1,(MCS0)_2TX	21.46	0.13996
802.11be EHT160-BF_Nss1,(MCS0)_2TX	15.64	0.03664
5.25-5.35GHz	-	-
802.11be EHT20-BF_Nss1,(MCS0)_2TX	15.75	0.03758
802.11be EHT40-BF_Nss1,(MCS0)_2TX	15.82	0.03819
802.11be EHT80-BF_Nss1,(MCS0)_2TX	15.86	0.03855
802.11be EHT160-BF_Nss1,(MCS0)_2TX	15.88	0.03873
5.47-5.725GHz	-	-
802.11be EHT20-BF_Nss1,(MCS0)_2TX	16.02	0.03999
802.11be EHT40-BF_Nss1,(MCS0)_2TX	15.92	0.03908
802.11be EHT80-BF_Nss1,(MCS0)_2TX	15.95	0.03936
802.11be EHT160-BF_Nss1,(MCS0)_2TX	15.96	0.03945
5.725-5.85GHz	-	-
802.11be EHT20-BF_Nss1,(MCS0)_2TX	22.01	0.15885
802.11be EHT40-BF_Nss1,(MCS0)_2TX	21.53	0.14223
802.11be EHT80-BF_Nss1,(MCS0)_2TX	21.06	0.12764



Average Power_Beamforming_ Radio 2_Patch_Indoor

Appendix C.40

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Total Power (dBm)	Power Limit (dBm)
802.11be EHT20-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5180MHz	Pass	13.33	17.80	18.84	21.36	22.67
5200MHz	Pass	13.33	18.13	18.84	21.51	22.67
5240MHz	Pass	13.33	18.34	19.17	21.79	22.67
5260MHz	Pass	13.58	12.60	12.85	15.74	16.40
5300MHz	Pass	13.58	12.57	12.88	15.74	16.40
5320MHz	Pass	13.58	12.61	12.86	15.75	16.40
5500MHz	Pass	13.47	12.60	13.19	15.92	16.51
5580MHz	Pass	13.47	12.46	13.09	15.80	16.51
5700MHz	Pass	13.47	12.62	12.95	15.80	16.51
5720MHz Straddle 5.47-5.725GHz	Pass	13.47	12.69	13.31	16.02	16.07
5720MHz Straddle 5.725-5.85GHz	Pass	13.41	7.53	8.34	10.96	22.59
5745MHz	Pass	13.41	18.69	19.28	22.01	22.59
5785MHz	Pass	13.41	17.76	17.47	20.63	22.59
5825MHz	Pass	13.41	16.82	17.57	20.22	22.59
802.11be EHT40-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5190MHz	Pass	13.33	18.45	19.08	21.79	22.67
5230MHz	Pass	13.33	18.72	19.22	21.99	22.67
5270MHz	Pass	13.58	12.64	12.97	15.82	16.40
5310MHz	Pass	13.58	12.67	12.92	15.81	16.40
5510MHz	Pass	13.47	12.43	13.34	15.92	16.51
5550MHz	Pass	13.47	12.44	13.18	15.84	16.51
5670MHz	Pass	13.47	12.43	12.99	15.73	16.51
5710MHz Straddle 5.47-5.725GHz	Pass	13.47	12.80	13.00	15.91	16.51
5710MHz Straddle 5.725-5.85GHz	Pass	13.41	3.25	3.49	6.38	22.59
5755MHz	Pass	13.41	17.68	19.23	21.53	22.59
5795MHz	Pass	13.41	16.77	18.11	20.50	22.59
802.11be EHT80-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5210MHz	Pass	13.33	17.97	18.88	21.46	22.67
5290MHz	Pass	13.58	12.69	13.00	15.86	16.40
5530MHz	Pass	13.47	12.65	13.22	15.95	16.51
5610MHz	Pass	13.47	12.78	13.04	15.92	16.51
5690MHz Straddle 5.47-5.725GHz	Pass	13.47	12.82	12.91	15.88	16.51
5690MHz Straddle 5.725-5.85GHz	Pass	13.41	-0.52	-0.31	2.60	22.59
5775MHz	Pass	13.41	17.55	18.50	21.06	22.59
802.11be EHT160-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5250MHz Straddle 5.15-5.25GHz	Pass	13.33	12.76	12.49	15.64	22.67
5250MHz Straddle 5.25-5.35GHz	Pass	13.58	12.48	13.22	15.88	16.40
5570MHz	Pass	13.47	12.72	13.16	15.96	16.51


DG = Directional Gain; Port X = Port X output power
Inf = There's no restriction for the limit.

5.15-5.25GHz_802.11be EHT160-BF_Nss1,(MCS0)_2TX

AV Power

5250MHz Straddle 5.15-5.25GHz_TX

28/05/2025

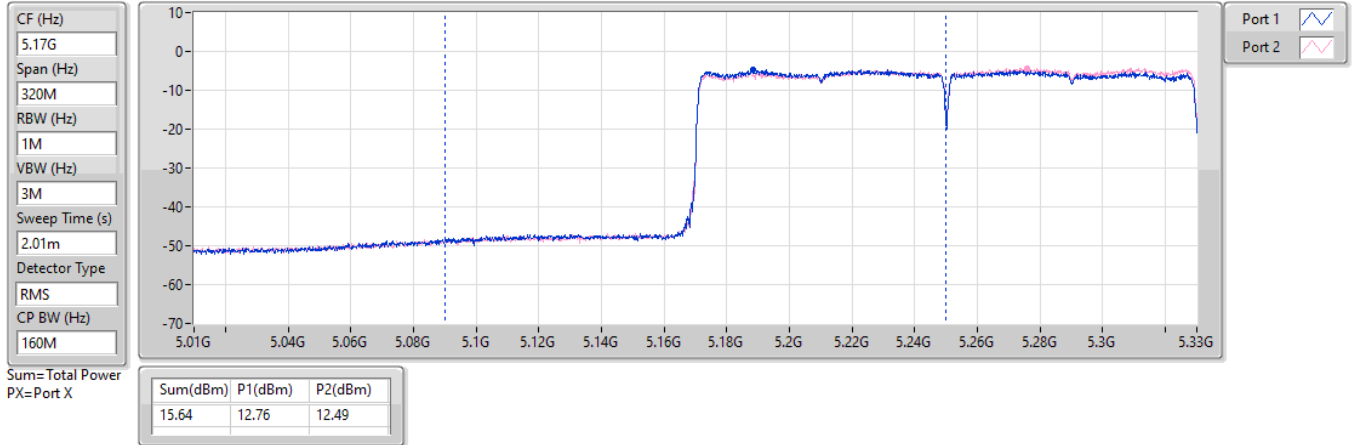


5.25-5.35GHz_802.11be EHT160-BF_Nss1,(MCS0)_2TX

AV Power

5250MHz Straddle 5.25-5.35GHz_TX

28/05/2025

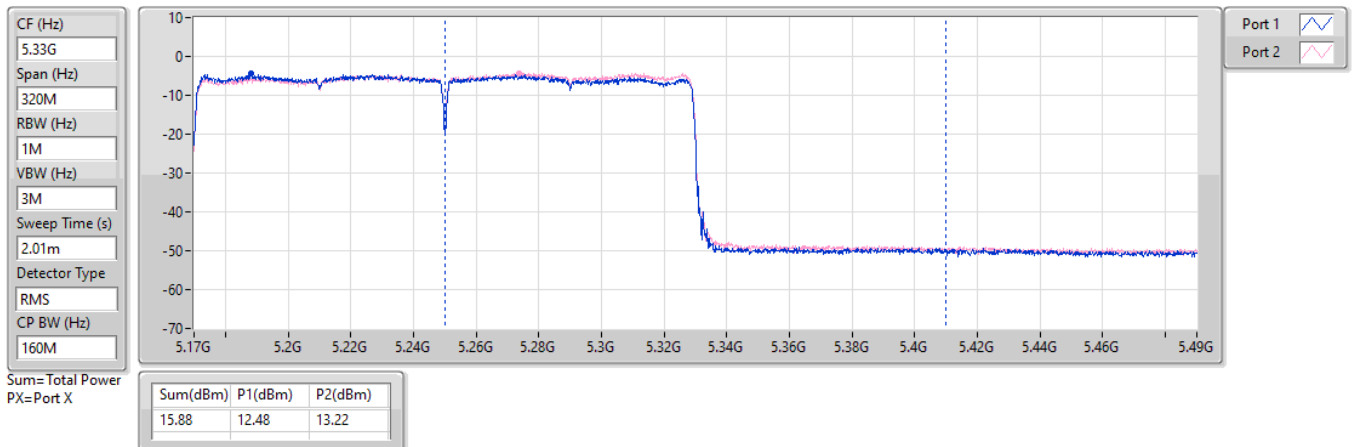




5.47-5.725GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX

AV Power

5720MHz Straddle 5.47-5.725GHz_TX

20/05/2025

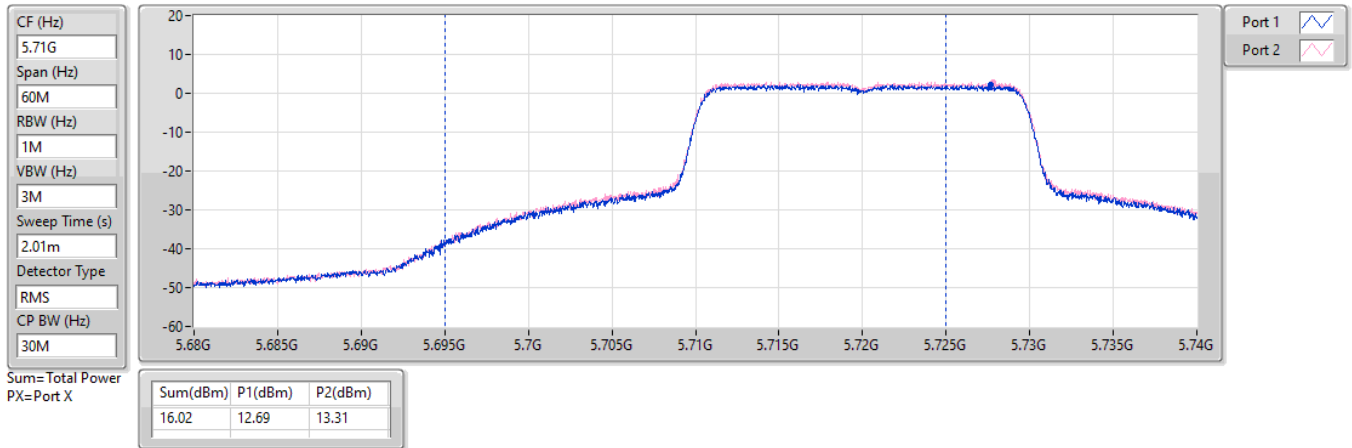



**Average Power_Beamforming_
Radio 3_Dipole_Indoor**

Appendix C.41

Summary

Mode	Total Power (dBm)	Total Power (W)
5.15-5.25GHz	-	-
802.11be EHT20-BF_Nss1,(MCS0)_2TX	22.42	0.17458
802.11be EHT40-BF_Nss1,(MCS0)_2TX	21.60	0.14454
802.11be EHT80-BF_Nss1,(MCS0)_2TX	20.74	0.11858
5.25-5.35GHz	-	-
802.11be EHT20-BF_Nss1,(MCS0)_2TX	21.92	0.15560
802.11be EHT40-BF_Nss1,(MCS0)_2TX	21.72	0.14859
802.11be EHT80-BF_Nss1,(MCS0)_2TX	21.22	0.13243



Average Power_Beamforming_ Radio 3_Dipole_Indoor

Appendix C.41

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Total Power (dBm)	Power Limit (dBm)
802.11be EHT20-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5180MHz	Pass	6.74	19.28	19.54	22.42	29.26
5200MHz	Pass	6.74	18.98	19.11	22.06	29.26
5240MHz	Pass	6.74	18.07	18.08	21.09	29.26
5260MHz	Pass	6.25	18.1	18.04	21.08	23.73
5300MHz	Pass	6.25	18.83	18.98	21.92	23.73
5320MHz	Pass	6.25	17.98	18.54	21.28	23.73
802.11be EHT40-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5190MHz	Pass	6.74	18.61	18.57	21.60	29.26
5230MHz	Pass	6.74	18.36	18.36	21.37	29.26
5270MHz	Pass	6.25	18.7	18.39	21.56	23.73
5310MHz	Pass	6.25	18.7	18.71	21.72	23.73
802.11be EHT80-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5210MHz	Pass	6.74	17.63	17.82	20.74	29.26
5290MHz	Pass	6.25	18.18	18.24	21.22	23.73

DG = Directional Gain; Port X = Port X output power
Inf = There's no restriction for the limit.



**Average Power_Beamforming_
Radio 3_Patch_Indoor**

Appendix C.42

Summary

Mode	Total Power (dBm)	Total Power (W)
5.15-5.25GHz	-	-
802.11be EHT20-BF_Nss1,(MCS0)_2TX	22.07	0.16106
802.11be EHT40-BF_Nss1,(MCS0)_2TX	21.37	0.13709
802.11be EHT80-BF_Nss1,(MCS0)_2TX	18.76	0.07516
5.25-5.35GHz	-	-
802.11be EHT20-BF_Nss1,(MCS0)_2TX	15.84	0.03837
802.11be EHT40-BF_Nss1,(MCS0)_2TX	15.80	0.03802
802.11be EHT80-BF_Nss1,(MCS0)_2TX	15.61	0.03639



Average Power_Beamforming_ Radio 3_Patch_Indoor

Appendix C.42

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Total Power (dBm)	Power Limit (dBm)
802.11be EHT20-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5180MHz	Pass	13.32	18.93	19.18	22.07	22.68
5200MHz	Pass	13.32	18.98	19.11	22.06	22.68
5240MHz	Pass	13.32	18.07	18.08	21.09	22.68
5260MHz	Pass	13.60	12.58	12.76	15.68	16.38
5300MHz	Pass	13.60	12.65	12.84	15.76	16.38
5320MHz	Pass	13.60	12.58	13.06	15.84	16.38
802.11be EHT40-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5190MHz	Pass	13.32	17.07	17.12	20.11	22.68
5230MHz	Pass	13.32	18.36	18.36	21.37	22.68
5270MHz	Pass	13.60	12.86	12.71	15.80	16.38
5310MHz	Pass	13.60	12.81	12.72	15.78	16.38
802.11be EHT80-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5210MHz	Pass	13.32	15.61	15.89	18.76	22.68
5290MHz	Pass	13.60	12.56	12.64	15.61	16.38

DG = Directional Gain; Port X = Port X output power
Inf = There's no restriction for the limit.



Summary

Mode	Total Power (dBm)	Total Power (W)
5.15-5.25GHz	-	-
802.11be EHT20-BF_Nss1,(MCS0)_2TX	13.66	0.02323
802.11be EHT40-BF_Nss1,(MCS0)_2TX	13.68	0.02333
802.11be EHT80-BF_Nss1,(MCS0)_2TX	13.58	0.02280
802.11be EHT160-BF_Nss1,(MCS0)_2TX	13.59	0.02286
5.25-5.35GHz	-	-
802.11be EHT20-BF_Nss1,(MCS0)_2TX	21.19	0.13152
802.11be EHT40-BF_Nss1,(MCS0)_2TX	21.51	0.14158
802.11be EHT80-BF_Nss1,(MCS0)_2TX	21.10	0.12882
802.11be EHT160-BF_Nss1,(MCS0)_2TX	13.75	0.02371
5.47-5.725GHz	-	-
802.11be EHT20-BF_Nss1,(MCS0)_2TX	21.06	0.12764
802.11be EHT40-BF_Nss1,(MCS0)_2TX	21.38	0.13740
802.11be EHT80-BF_Nss1,(MCS0)_2TX	20.92	0.12359
802.11be EHT160-BF_Nss1,(MCS0)_2TX	18.33	0.06808
5.725-5.85GHz	-	-
802.11be EHT20-BF_Nss1,(MCS0)_2TX	22.01	0.15885
802.11be EHT40-BF_Nss1,(MCS0)_2TX	21.53	0.14223
802.11be EHT80-BF_Nss1,(MCS0)_2TX	21.06	0.12764



Average Power_Beamforming_ Radio 2_Dipole_Outdoor

Appendix C.43

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Total Power (dBm)	Power Limit (dBm)
802.11be EHT20-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5180MHz	Pass	6.75	9.93	10.97	13.49	29.25
5200MHz	Pass	6.75	10.24	10.97	13.63	29.25
5240MHz	Pass	6.75	10.22	11.04	13.66	29.25
5260MHz	Pass	6.23	17.70	18.62	21.19	23.75
5300MHz	Pass	6.23	17.52	18.17	20.87	23.75
5320MHz	Pass	6.23	17.30	18.08	20.72	23.75
5500MHz	Pass	6.33	17.60	18.46	21.06	23.65
5580MHz	Pass	6.33	17.28	17.89	20.61	23.65
5700MHz	Pass	6.33	15.05	15.51	18.30	23.65
5720MHz Straddle 5.47-5.725GHz	Pass	6.33	16.28	17.22	19.79	22.72
5720MHz Straddle 5.725-5.85GHz	Pass	6.55	11.10	12.07	14.62	29.45
5745MHz	Pass	6.55	18.69	19.28	22.01	29.45
5785MHz	Pass	6.55	17.76	17.47	20.63	29.45
5825MHz	Pass	6.55	16.82	17.57	20.22	29.45
802.11be EHT40-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5190MHz	Pass	6.75	10.34	10.98	13.68	29.25
5230MHz	Pass	6.75	10.36	10.82	13.61	29.25
5270MHz	Pass	6.23	17.81	19.09	21.51	23.75
5310MHz	Pass	6.23	18.19	18.65	21.44	23.75
5510MHz	Pass	6.33	17.76	18.66	21.24	23.65
5550MHz	Pass	6.33	17.92	18.78	21.38	23.65
5670MHz	Pass	6.33	17.73	18.45	21.12	23.65
5710MHz Straddle 5.47-5.725GHz	Pass	6.33	17.68	18.51	21.13	23.65
5710MHz Straddle 5.725-5.85GHz	Pass	6.55	8.03	8.96	11.53	29.45
5755MHz	Pass	6.55	17.68	19.23	21.53	29.45
5795MHz	Pass	6.55	16.77	18.11	20.50	29.45
802.11be EHT80-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5210MHz	Pass	6.75	10.12	10.98	13.58	29.25
5290MHz	Pass	6.23	17.70	18.44	21.10	23.75
5530MHz	Pass	6.33	17.66	18.15	20.92	23.65
5610MHz	Pass	6.33	17.50	18.21	20.88	23.65
5690MHz Straddle 5.47-5.725GHz	Pass	6.33	17.27	17.95	20.63	23.65
5690MHz Straddle 5.725-5.85GHz	Pass	6.55	3.93	4.68	7.33	29.45
5775MHz	Pass	6.55	17.55	18.50	21.06	29.45
802.11be EHT160-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5250MHz Straddle 5.15-5.25GHz	Pass	6.75	10.84	10.31	13.59	29.25
5250MHz Straddle 5.25-5.35GHz	Pass	6.23	10.47	10.99	13.75	23.75
5570MHz	Pass	6.33	15.05	15.58	18.33	23.65


DG = Directional Gain; Port X = Port X output power
Inf = There's no restriction for the limit.

5.15-5.25GHz_802.11be EHT160-BF_Nss1,(MCS0)_2TX

AV Power

5250MHz Straddle 5.15-5.25GHz_TX

29/05/2025

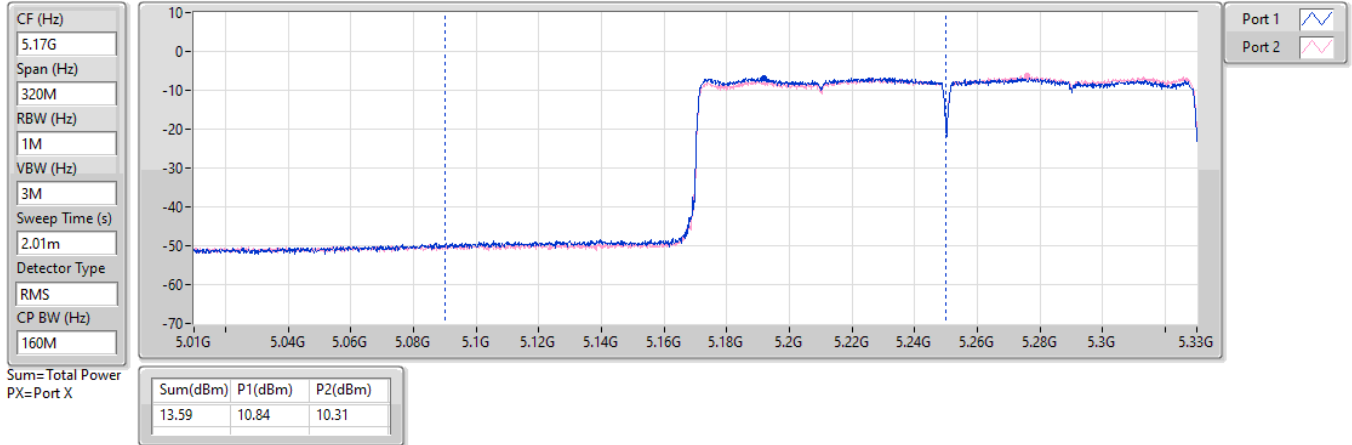


5.25-5.35GHz_802.11be EHT160-BF_Nss1,(MCS0)_2TX

AV Power

5250MHz Straddle 5.25-5.35GHz_TX

29/05/2025

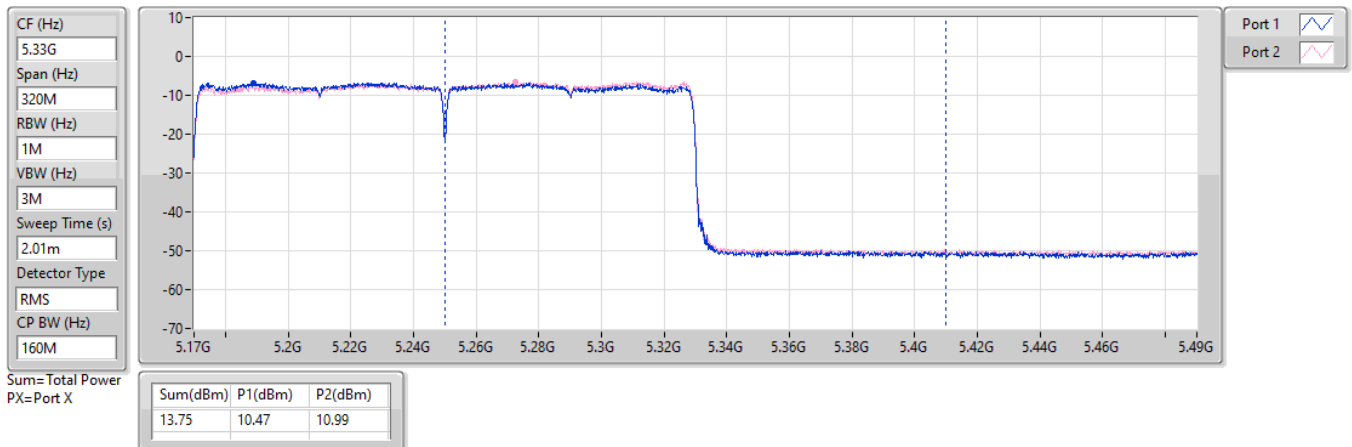



**Average Power_Beamforming_
Radio 2_Patch_Outdoor**

Appendix C.44

Summary

Mode	Total Power (dBm)	Total Power (W)
5.15-5.25GHz	-	-
802.11be EHT20-BF_Nss1,(MCS0)_2TX	7.12	0.00515
802.11be EHT40-BF_Nss1,(MCS0)_2TX	7.13	0.00516
802.11be EHT80-BF_Nss1,(MCS0)_2TX	7.06	0.00508
802.11be EHT160-BF_Nss1,(MCS0)_2TX	7.01	0.00502
5.25-5.35GHz	-	-
802.11be EHT20-BF_Nss1,(MCS0)_2TX	15.75	0.03758
802.11be EHT40-BF_Nss1,(MCS0)_2TX	15.82	0.03819
802.11be EHT80-BF_Nss1,(MCS0)_2TX	15.86	0.03855
802.11be EHT160-BF_Nss1,(MCS0)_2TX	7.19	0.00524
5.47-5.725GHz	-	-
802.11be EHT20-BF_Nss1,(MCS0)_2TX	16.02	0.03999
802.11be EHT40-BF_Nss1,(MCS0)_2TX	15.92	0.03908
802.11be EHT80-BF_Nss1,(MCS0)_2TX	15.95	0.03936
802.11be EHT160-BF_Nss1,(MCS0)_2TX	15.96	0.03945
5.725-5.85GHz	-	-
802.11be EHT20-BF_Nss1,(MCS0)_2TX	22.01	0.15885
802.11be EHT40-BF_Nss1,(MCS0)_2TX	21.53	0.14223
802.11be EHT80-BF_Nss1,(MCS0)_2TX	21.06	0.12764



Average Power_Beamforming_ Radio 2_Patch_Outdoor

Appendix C.44

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Total Power (dBm)	Power Limit (dBm)
802.11be EHT20-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5180MHz	Pass	13.33	3.42	4.47	6.99	22.67
5200MHz	Pass	13.33	3.73	4.45	7.12	22.67
5240MHz	Pass	13.33	3.47	4.27	6.90	22.67
5260MHz	Pass	13.58	12.6	12.85	15.74	16.40
5300MHz	Pass	13.58	12.57	12.88	15.74	16.40
5320MHz	Pass	13.58	12.61	12.86	15.75	16.40
5500MHz	Pass	13.47	12.6	13.19	15.92	16.51
5580MHz	Pass	13.47	12.46	13.09	15.80	16.51
5700MHz	Pass	13.47	12.62	12.95	15.80	16.51
5720MHz Straddle 5.47-5.725GHz	Pass	13.47	12.69	13.31	16.02	16.07
5720MHz Straddle 5.725-5.85GHz	Pass	13.41	7.53	8.34	10.96	22.59
5745MHz	Pass	13.41	18.69	19.28	22.01	22.59
5785MHz	Pass	13.41	17.76	17.47	20.63	22.59
5825MHz	Pass	13.41	16.82	17.57	20.22	22.59
802.11be EHT40-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5190MHz	Pass	13.33	3.55	4.23	6.91	22.67
5230MHz	Pass	13.33	3.86	4.37	7.13	22.67
5270MHz	Pass	13.58	12.64	12.97	15.82	16.40
5310MHz	Pass	13.58	12.67	12.92	15.81	16.40
5510MHz	Pass	13.47	12.43	13.34	15.92	16.51
5550MHz	Pass	13.47	12.44	13.18	15.84	16.51
5670MHz	Pass	13.47	12.43	12.99	15.73	16.51
5710MHz Straddle 5.47-5.725GHz	Pass	13.47	12.8	13	15.91	16.51
5710MHz Straddle 5.725-5.85GHz	Pass	13.41	3.25	3.49	6.38	22.59
5755MHz	Pass	13.41	17.68	19.23	21.53	22.59
5795MHz	Pass	13.41	16.77	18.11	20.50	22.59
802.11be EHT80-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5210MHz	Pass	13.33	3.57	4.49	7.06	22.67
5290MHz	Pass	13.58	12.69	13	15.86	16.40
5530MHz	Pass	13.47	12.65	13.22	15.95	16.51
5610MHz	Pass	13.47	12.78	13.04	15.92	16.51
5690MHz Straddle 5.47-5.725GHz	Pass	13.47	12.82	12.91	15.88	16.51
5690MHz Straddle 5.725-5.85GHz	Pass	13.41	-0.52	-0.31	2.60	22.59
5775MHz	Pass	13.41	17.55	18.5	21.06	22.59
802.11be EHT160-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5250MHz Straddle 5.15-5.25GHz	Pass	13.33	4.38	3.59	7.01	22.67
5250MHz Straddle 5.25-5.35GHz	Pass	13.58	4.08	4.27	7.19	16.40
5570MHz	Pass	13.47	12.72	13.16	15.96	16.51


DG = Directional Gain; Port X = Port X output power
Inf = There's no restriction for the limit.

5.15-5.25GHz_802.11be EHT160-BF_Nss1,(MCS0)_2TX

AV Power

5250MHz Straddle 5.15-5.25GHz_TX

29/05/2025

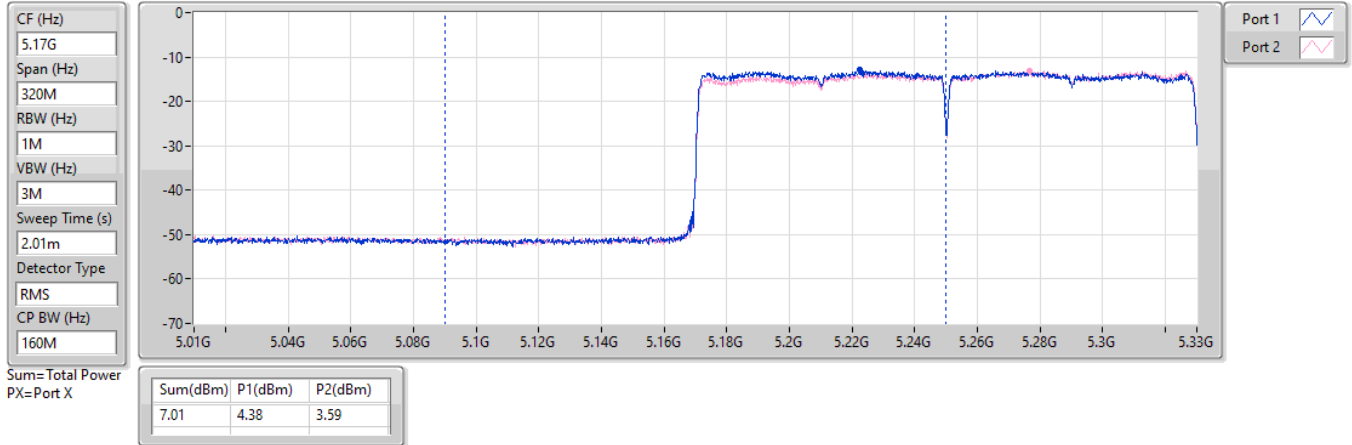


5.25-5.35GHz_802.11be EHT160-BF_Nss1,(MCS0)_2TX

AV Power

5250MHz Straddle 5.25-5.35GHz_TX

29/05/2025

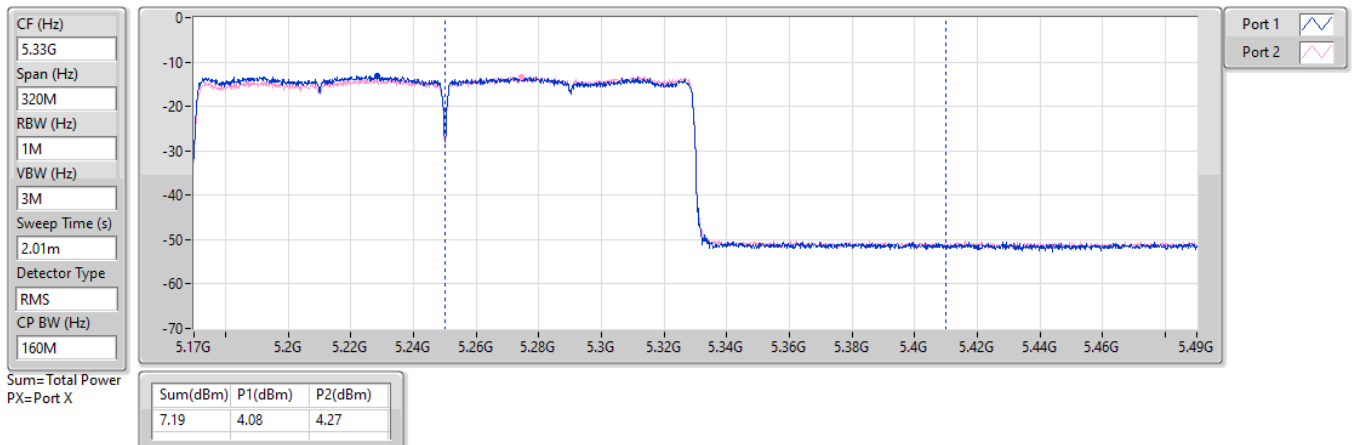




5.47-5.725GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX

AV Power

5720MHz Straddle 5.47-5.725GHz_TX

20/05/2025

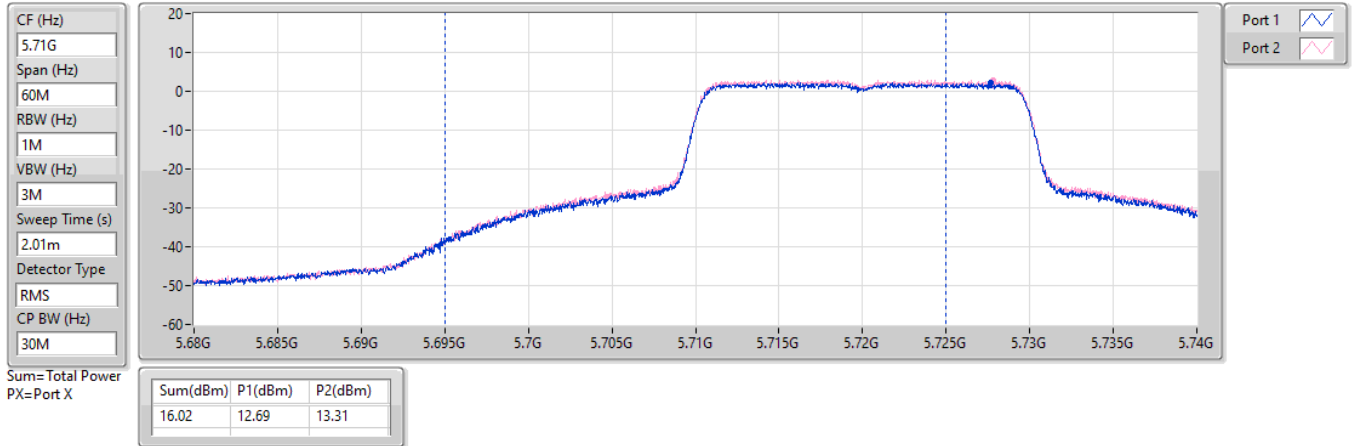



Summary

Mode	Total Power (dBm)	Total Power (W)
5.15-5.25GHz	-	-
802.11be EHT20-BF_Nss1,(MCS0)_2TX	13.70	0.02344
802.11be EHT40-BF_Nss1,(MCS0)_2TX	13.73	0.02360
802.11be EHT80-BF_Nss1,(MCS0)_2TX	13.60	0.02291
5.25-5.35GHz	-	-
802.11be EHT20-BF_Nss1,(MCS0)_2TX	21.92	0.15560
802.11be EHT40-BF_Nss1,(MCS0)_2TX	21.72	0.14859
802.11be EHT80-BF_Nss1,(MCS0)_2TX	21.22	0.13243



Average Power_Beamforming_ Radio 3_Dipole_Outdoor

Appendix C.45

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Total Power (dBm)	Power Limit (dBm)
802.11be EHT20-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5180MHz	Pass	6.74	10.41	10.64	13.54	29.26
5200MHz	Pass	6.74	10.59	10.74	13.68	29.26
5240MHz	Pass	6.74	10.69	10.68	13.70	29.26
5260MHz	Pass	6.25	18.1	18.04	21.08	23.73
5300MHz	Pass	6.25	18.83	18.98	21.92	23.73
5320MHz	Pass	6.25	17.98	18.54	21.28	23.73
802.11be EHT40-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5190MHz	Pass	6.74	10.74	10.70	13.73	29.26
5230MHz	Pass	6.74	10.46	10.46	13.47	29.26
5270MHz	Pass	6.25	18.7	18.39	21.56	23.73
5310MHz	Pass	6.25	18.7	18.71	21.72	23.73
802.11be EHT80-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5210MHz	Pass	6.74	10.50	10.67	13.60	29.26
5290MHz	Pass	6.25	18.18	18.24	21.22	23.73

DG = Directional Gain; Port X = Port X output power
Inf = There's no restriction for the limit.



**Average Power_Beamforming_
Radio 3_Patch_Outdoor**

Appendix C.46

Summary

Mode	Total Power (dBm)	Total Power (W)
5.15-5.25GHz	-	-
802.11be EHT20-BF_Nss1,(MCS0)_2TX	6.96	0.00497
802.11be EHT40-BF_Nss1,(MCS0)_2TX	6.99	0.00500
802.11be EHT80-BF_Nss1,(MCS0)_2TX	7.15	0.00519
5.25-5.35GHz	-	-
802.11be EHT20-BF_Nss1,(MCS0)_2TX	15.84	0.03837
802.11be EHT40-BF_Nss1,(MCS0)_2TX	15.80	0.03802
802.11be EHT80-BF_Nss1,(MCS0)_2TX	15.61	0.03639



Average Power_Beamforming_ Radio 3_Patch_Outdoor

Appendix C.46

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Total Power (dBm)	Power Limit (dBm)
802.11be EHT20-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5180MHz	Pass	13.32	3.79	4.05	6.93	22.68
5200MHz	Pass	13.32	3.83	3.96	6.91	22.68
5240MHz	Pass	13.32	3.92	3.98	6.96	22.68
5260MHz	Pass	13.60	12.58	12.76	15.68	16.38
5300MHz	Pass	13.60	12.65	12.84	15.76	16.38
5320MHz	Pass	13.60	12.58	13.06	15.84	16.38
802.11be EHT40-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5190MHz	Pass	13.32	3.92	3.97	6.96	22.68
5230MHz	Pass	13.32	4.00	3.96	6.99	22.68
5270MHz	Pass	13.60	12.86	12.71	15.80	16.38
5310MHz	Pass	13.60	12.81	12.72	15.78	16.38
802.11be EHT80-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5210MHz	Pass	13.32	3.98	4.29	7.15	22.68
5290MHz	Pass	13.60	12.56	12.64	15.61	16.38

DG = Directional Gain; Port X = Port X output power
Inf = There's no restriction for the limit.



Summary

Mode	PD (dBm/RBW)
5.15-5.25GHz	-
a20_Nss1,(6Mbps)_1TX	6.24
a40_Nss1,(6Mbps)_1TX	1.56
a80_Nss1,(6Mbps)_1TX	-5.40
a160_Nss1,(6Mbps)_1TX	-9.53
5.25-5.35GHz	-
a20_Nss1,(6Mbps)_1TX	6.13
a40_Nss1,(6Mbps)_1TX	0.60
a80_Nss1,(6Mbps)_1TX	-5.33
a160_Nss1,(6Mbps)_1TX	-10.13
5.47-5.725GHz	-
a20_Nss1,(6Mbps)_1TX	6.13
a40_Nss1,(6Mbps)_1TX	1.49
a80_Nss1,(6Mbps)_1TX	0.06
a160_Nss1,(6Mbps)_1TX	-9.40
5.725-5.85GHz	-
a20_Nss1,(6Mbps)_1TX	5.33
a40_Nss1,(6Mbps)_1TX	1.98
a80_Nss1,(6Mbps)_1TX	-0.81

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;

Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
a20_Nss1,(6Mbps)_1TX	-	-	-	-	-
5180MHz	Pass	2.89	3.27	3.27	17.00
5200MHz	Pass	2.89	6.24	6.24	17.00
5240MHz	Pass	2.89	5.86	5.86	17.00
5260MHz	Pass	3.35	6.13	6.13	11.00
5300MHz	Pass	3.35	6.04	6.04	11.00
5320MHz	Pass	3.35	2.65	2.65	11.00
5500MHz	Pass	4.93	3.98	3.98	11.00
5580MHz	Pass	4.93	6.13	6.13	11.00
5700MHz	Pass	4.93	3.52	3.52	11.00
5720MHz Straddle 5.47-5.725GHz	Pass	4.93	5.96	5.96	11.00
5720MHz Straddle 5.725-5.85GHz	Pass	3.56	4.24	4.24	30.00
5745MHz	Pass	3.56	5.33	5.33	30.00
5785MHz	Pass	3.56	5.00	5.00	30.00
5825MHz	Pass	3.56	5.11	5.11	30.00
a40_Nss1,(6Mbps)_1TX	-	-	-	-	-
5190MHz	Pass	2.89	-3.73	-3.73	17.00
5230MHz	Pass	2.89	1.56	1.56	17.00
5270MHz	Pass	3.35	0.60	0.60	11.00
5310MHz	Pass	3.35	-3.53	-3.53	11.00
5510MHz	Pass	4.93	-4.35	-4.35	11.00
5550MHz	Pass	4.93	1.49	1.49	11.00
5670MHz	Pass	4.93	-0.63	-0.63	11.00
5710MHz Straddle 5.47-5.725GHz	Pass	4.93	1.24	1.24	11.00
5710MHz Straddle 5.725-5.85GHz	Pass	3.56	-0.86	-0.86	30.00
5755MHz	Pass	3.56	1.98	1.98	30.00
5795MHz	Pass	3.56	1.61	1.61	30.00
a80_Nss1,(6Mbps)_1TX	-	-	-	-	-
5210MHz	Pass	2.89	-5.40	-5.40	17.00
5290MHz	Pass	3.35	-5.33	-5.33	11.00
5530MHz	Pass	4.93	-5.77	-5.77	11.00
5610MHz	Pass	4.93	-1.61	-1.61	11.00
5690MHz Straddle 5.47-5.725GHz	Pass	4.93	0.06	0.06	11.00
5690MHz Straddle 5.725-5.85GHz	Pass	3.56	-2.71	-2.71	30.00
5775MHz	Pass	3.56	-0.81	-0.81	30.00
a160_Nss1,(6Mbps)_1TX	-	-	-	-	-
5250MHz Straddle 5.15-5.25GHz	Pass	2.89	-9.53	-9.53	17.00
5250MHz Straddle 5.25-5.35GHz	Pass	3.35	-10.13	-10.13	11.00
5570MHz	Pass	4.93	-9.40	-9.40	11.00

DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;
Inf = There's no restriction for the limit.

5.15-5.25GHz_a20_Nss1,(6Mbps)_1TX

PSD

5200MHz

27/05/2025

CF (Hz)
5.2G


Span (Hz)
30M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

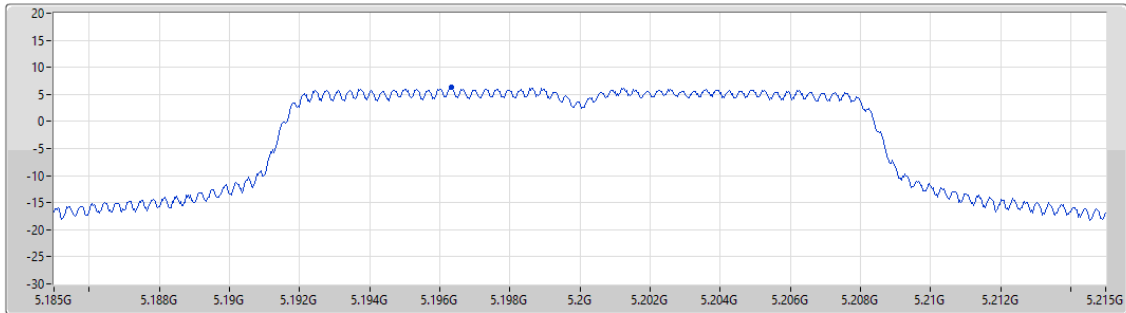

Port 1

Sum	PD	Port 1
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
6.24	6.24	6.24

5.15-5.25GHz_a40_Nss1,(6Mbps)_1TX

PSD

5230MHz

28/05/2025

CF (Hz)
5.23G


Span (Hz)
60M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

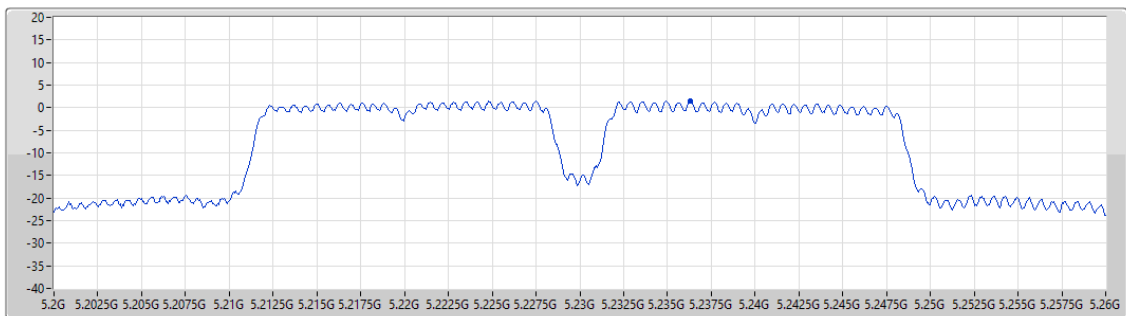

Port 1


Sum	PD	Port 1
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
1.56	1.56	1.56

5.15-5.25GHz_a80_Nss1,(6Mbps)_1TX

PSD

5210MHz

28/05/2025

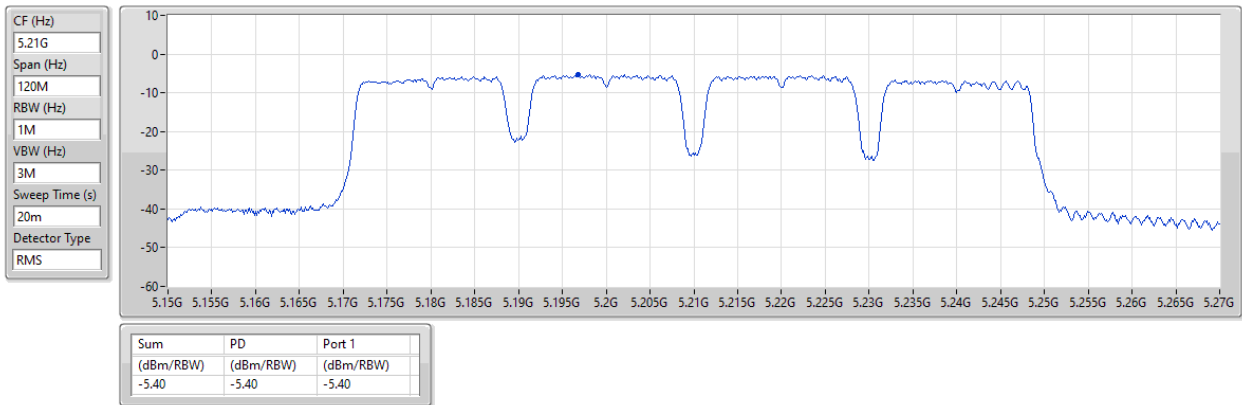


5.15-5.25GHz_a160_Nss1,(6Mbps)_1TX

PSD

5250MHz Straddle 5.15-5.25GHz

28/05/2025

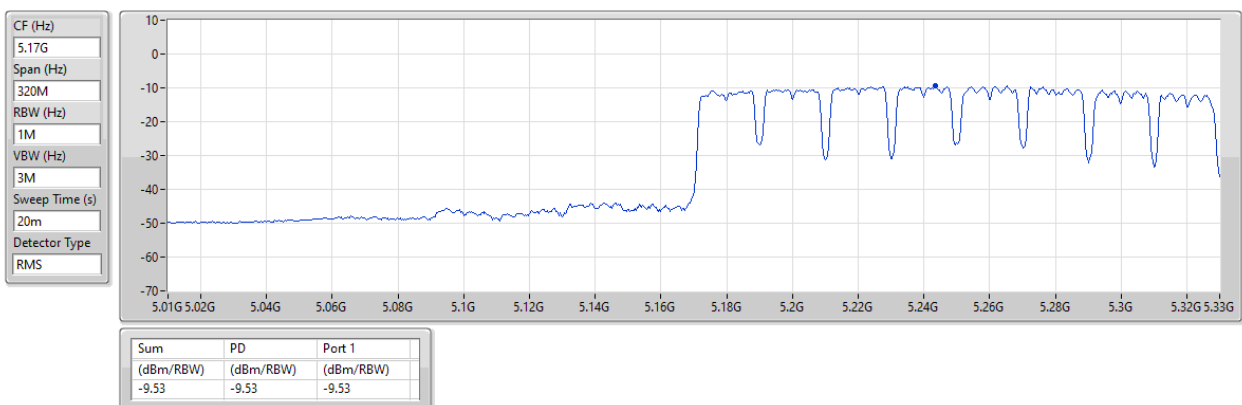


5.25-5.35GHz_a20_Nss1,(6Mbps)_1TX

PSD

5260MHz

28/05/2025

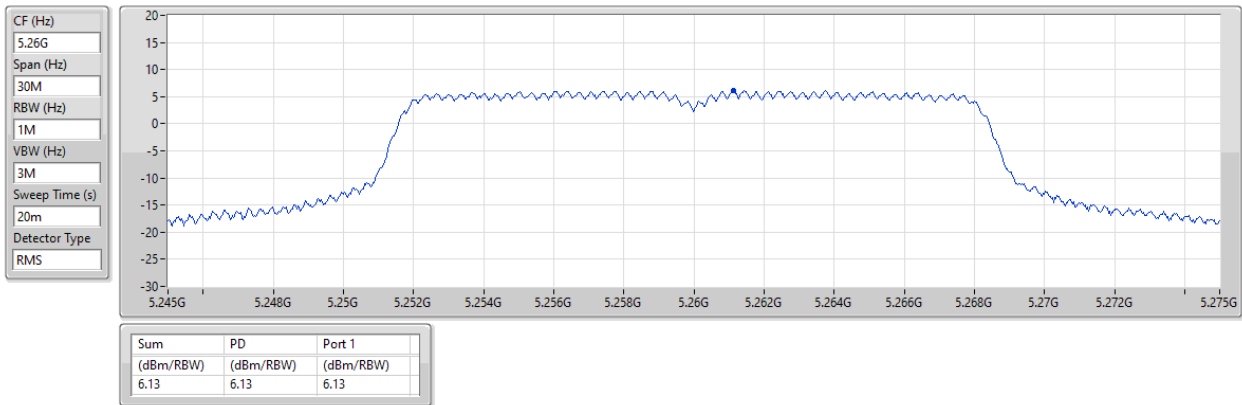


5.25-5.35GHz_a40_Nss1,(6Mbps)_1TX

PSD

5270MHz

28/05/2025

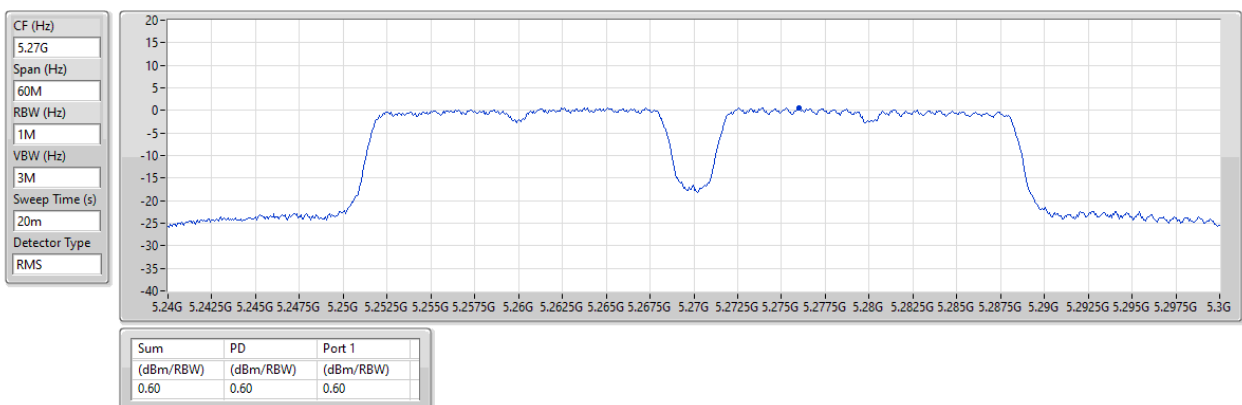


5.25-5.35GHz_a80_Nss1,(6Mbps)_1TX

PSD

5290MHz

28/05/2025

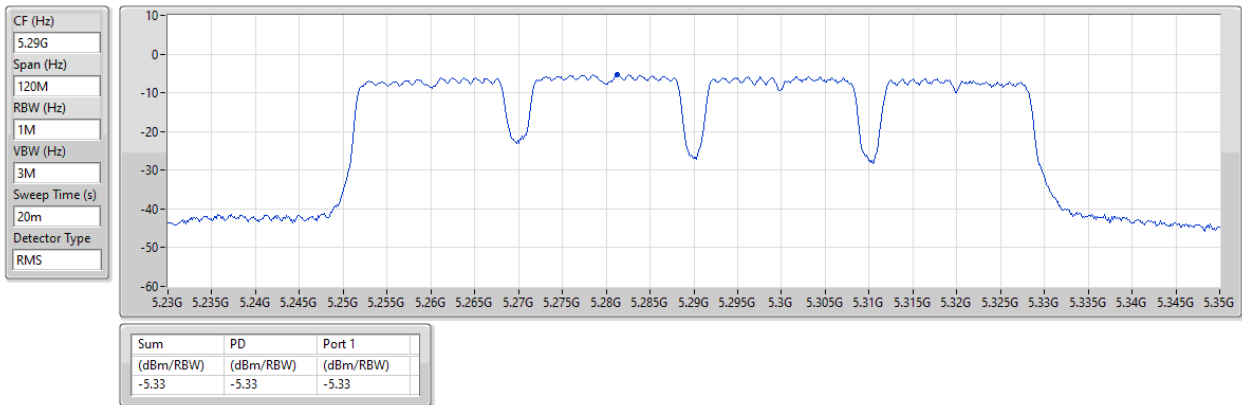


5.25-5.35GHz_a160_Nss1,(6Mbps)_1TX

PSD

5250MHz Straddle 5.25-5.35GHz

28/05/2025

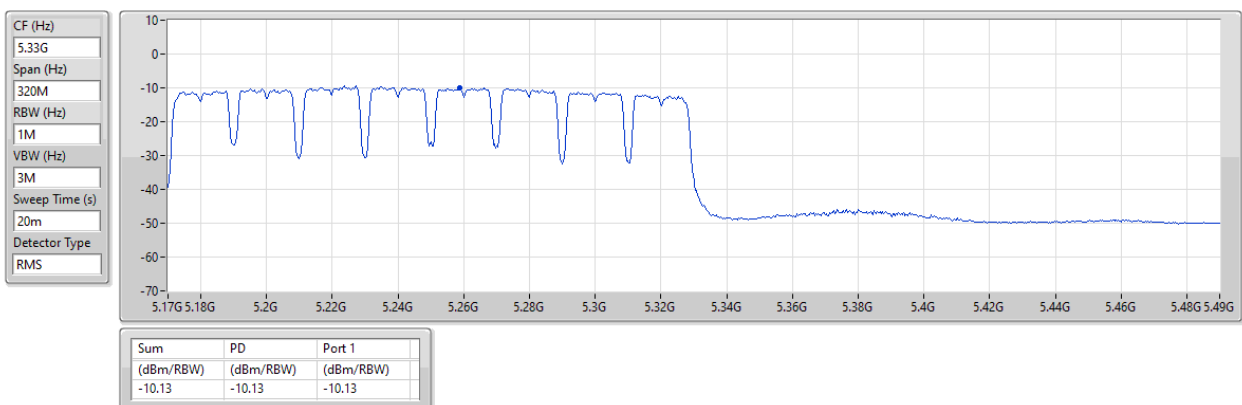


5.47-5.725GHz_a20_Nss1,(6Mbps)_1TX

PSD

5580MHz

28/05/2025

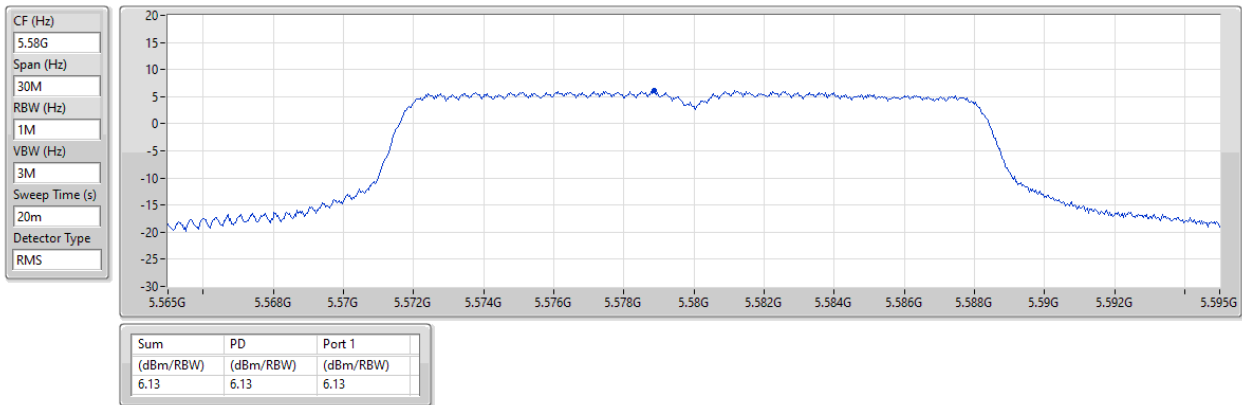


5.47-5.725GHz_a40_Nss1,(6Mbps)_1TX

PSD

5550MHz

28/05/2025

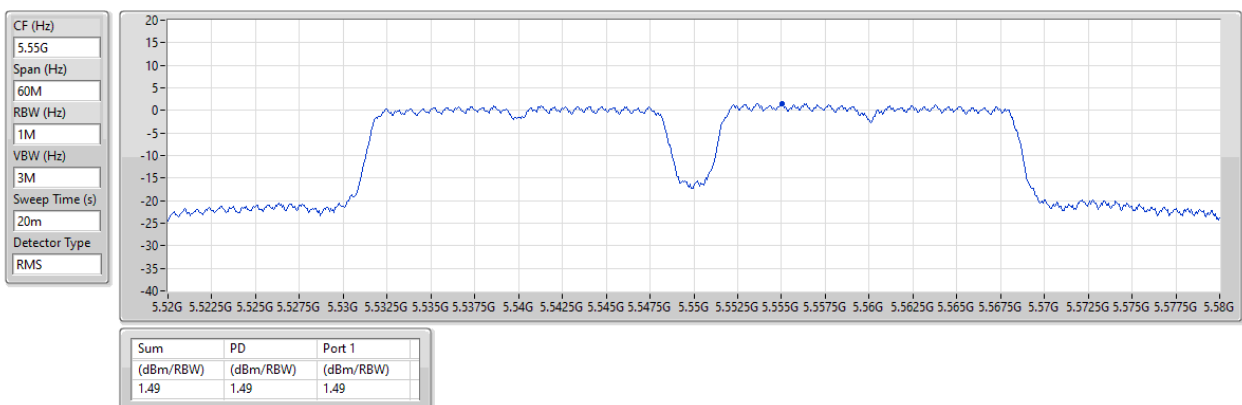


5.47-5.725GHz_a80_Nss1,(6Mbps)_1TX

PSD

5690MHz Straddle 5.47-5.725GHz

28/05/2025

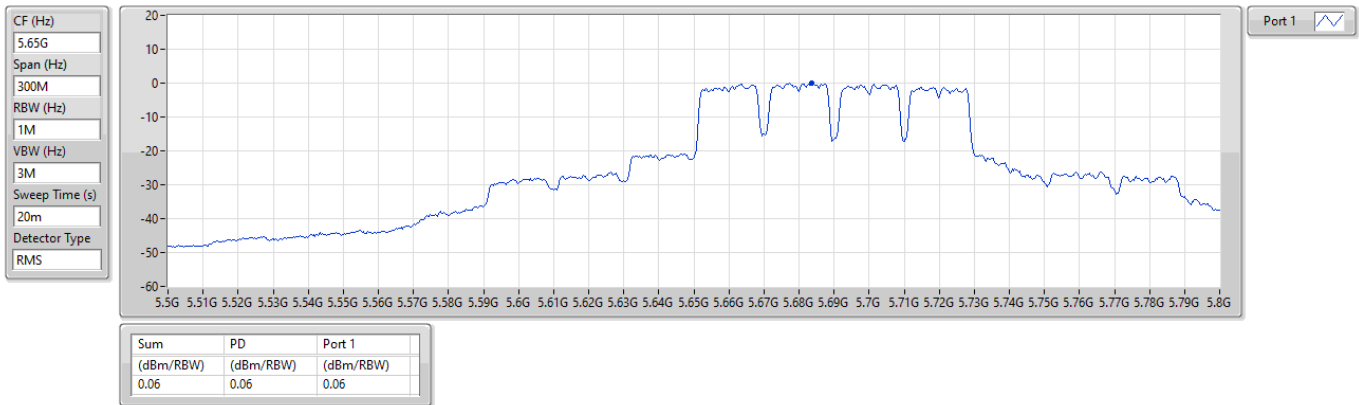


5.47-5.725GHz_a160_Nss1,(6Mbps)_1TX

PSD

5570MHz

28/05/2025

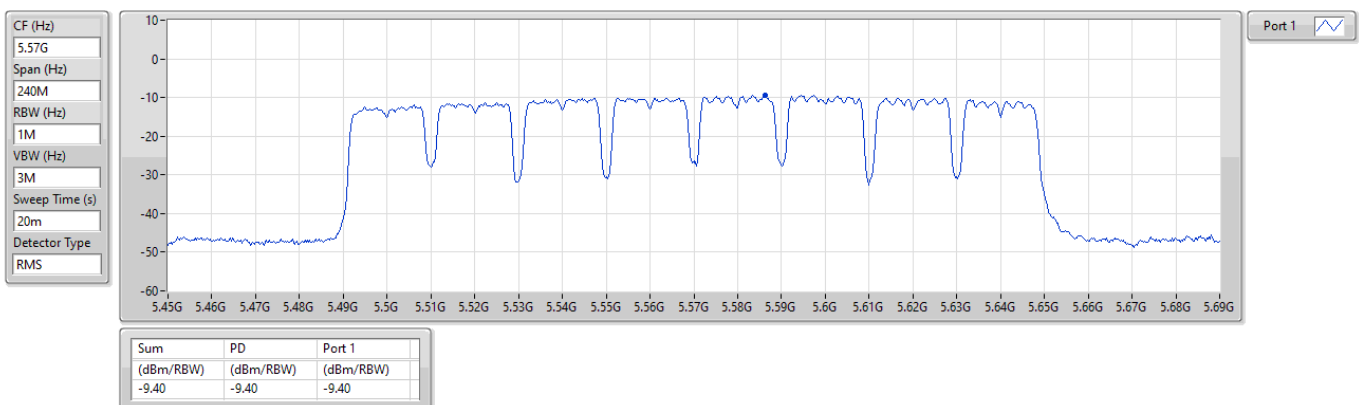


5.725-5.85GHz_a20_Nss1,(6Mbps)_1TX

PSD

5745MHz

28/05/2025

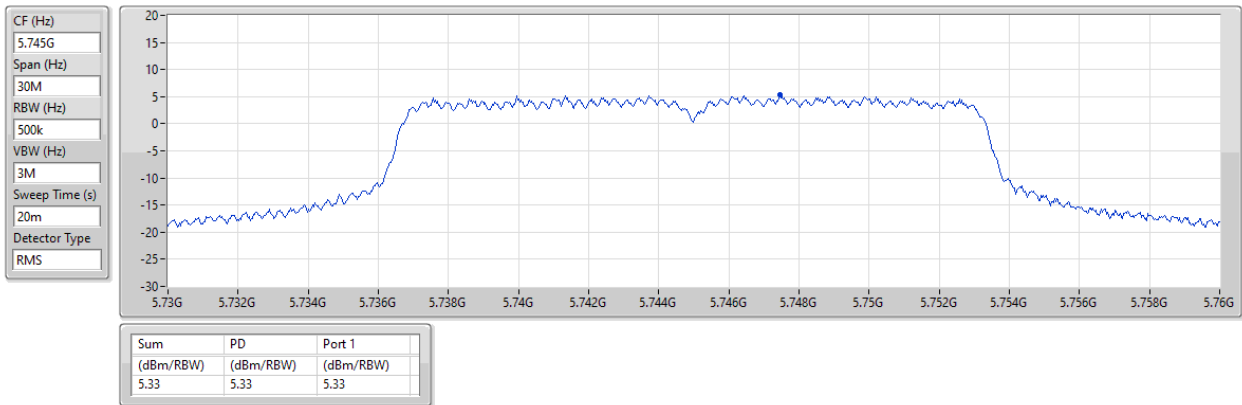



5.725-5.85GHz_a40_Nss1,(6Mbps)_1TX

PSD

5755MHz

28/05/2025

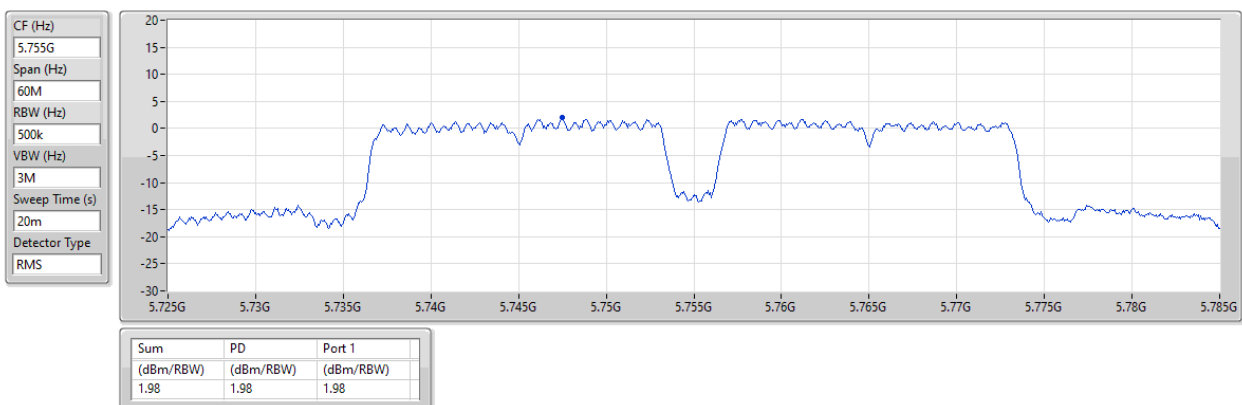

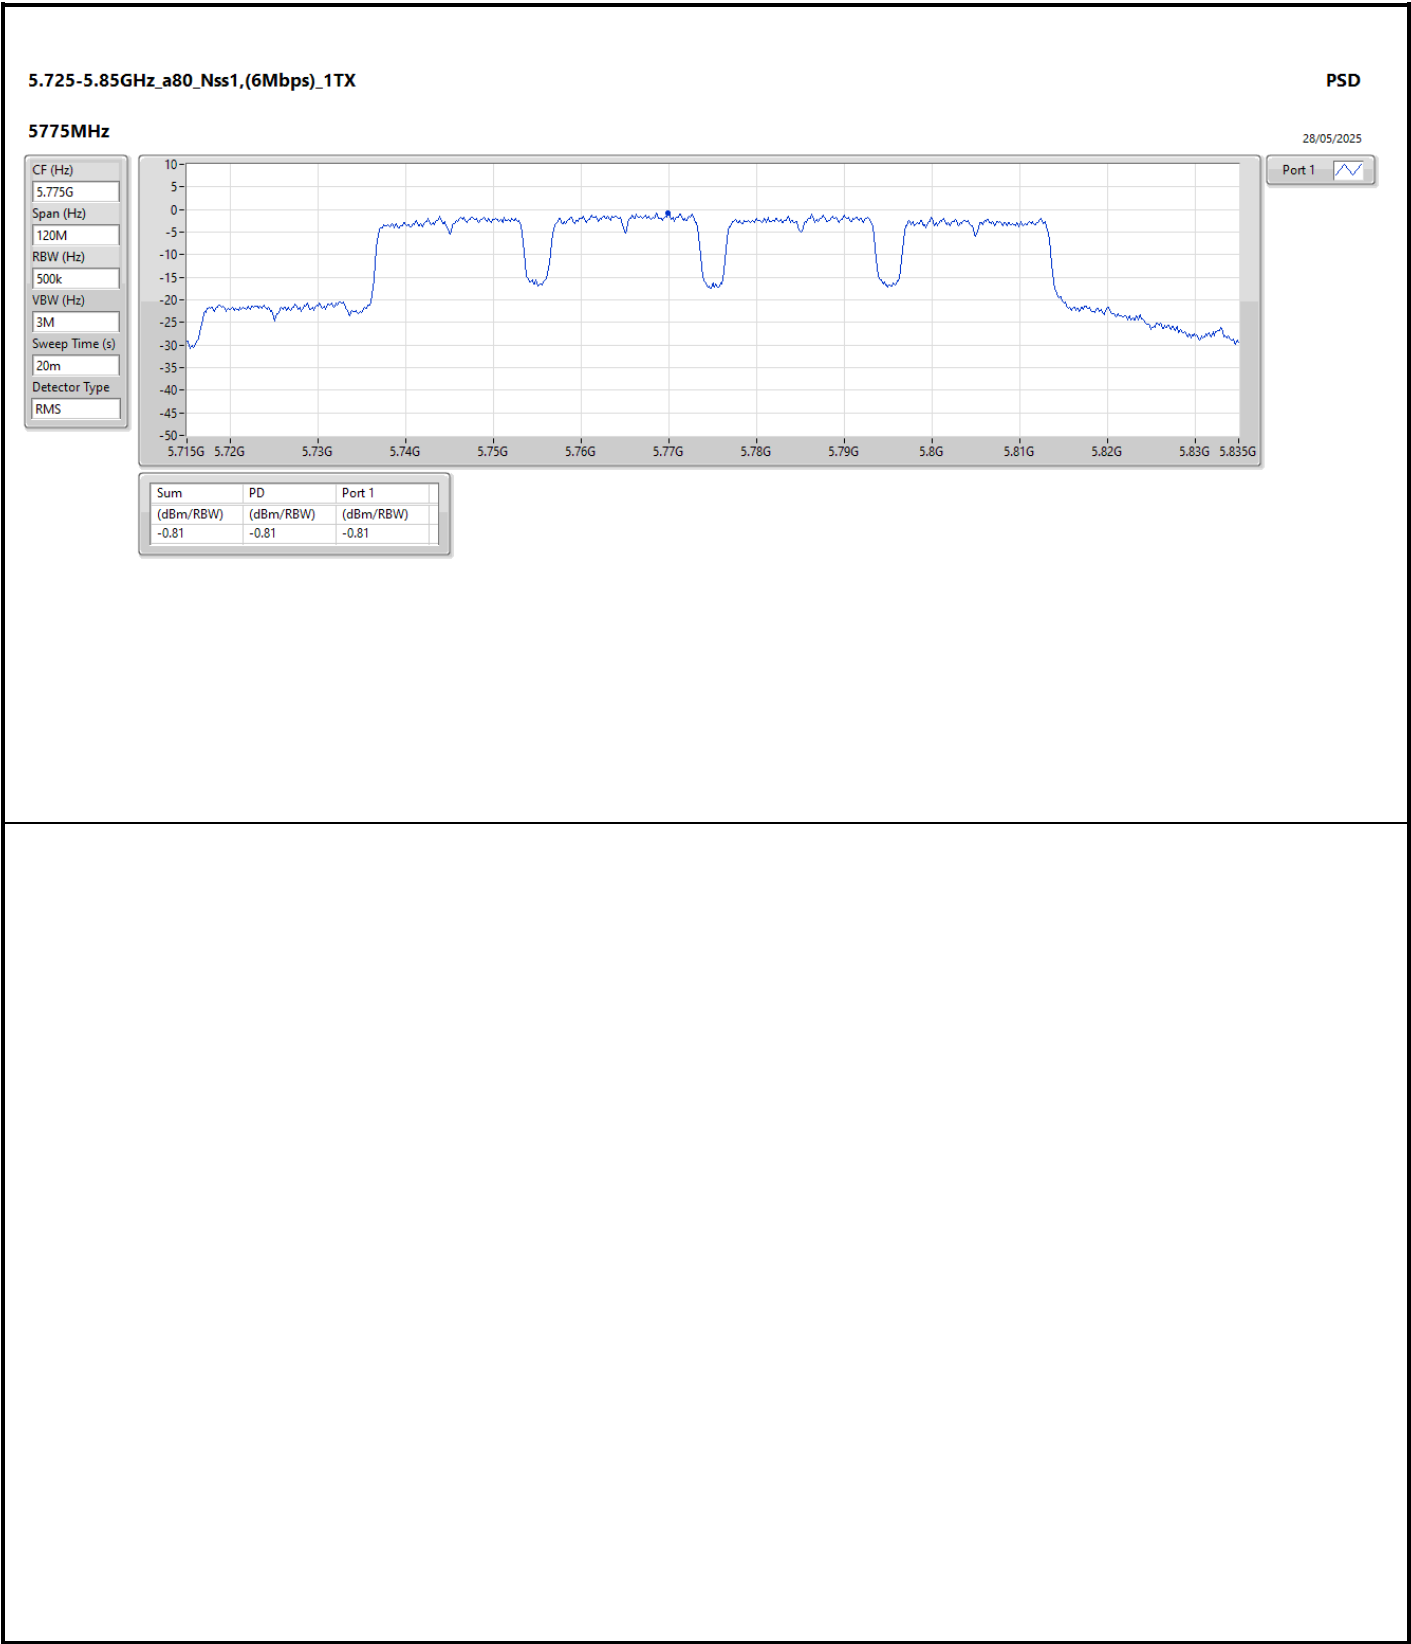



Summary

Mode	PD (dBm/RBW)
5.15-5.25GHz	-
802.11a_Nss1,(6Mbps)_1TX	5.05
802.11be EHT20_Nss1,(MCS0)_1TX	4.77
802.11be EHT40_Nss1,(MCS0)_1TX	2.59
802.11be EHT80_Nss1,(MCS0)_1TX	-0.95
802.11be EHT160_Nss1,(MCS0)_1TX	-3.29
5.25-5.35GHz	-
802.11a_Nss1,(6Mbps)_1TX	4.27
802.11be EHT20_Nss1,(MCS0)_1TX	4.43
802.11be EHT40_Nss1,(MCS0)_1TX	1.94
802.11be EHT80_Nss1,(MCS0)_1TX	-1.14
802.11be EHT160_Nss1,(MCS0)_1TX	-3.58
5.47-5.725GHz	-
802.11a_Nss1,(6Mbps)_1TX	4.26
802.11be EHT20_Nss1,(MCS0)_1TX	4.10
802.11be EHT40_Nss1,(MCS0)_1TX	1.94
802.11be EHT80_Nss1,(MCS0)_1TX	-1.42
802.11be EHT160_Nss1,(MCS0)_1TX	-4.82
5.725-5.85GHz	-
802.11a_Nss1,(6Mbps)_1TX	3.94
802.11be EHT20_Nss1,(MCS0)_1TX	3.67
802.11be EHT40_Nss1,(MCS0)_1TX	0.40
802.11be EHT80_Nss1,(MCS0)_1TX	-2.77

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;

Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
802.11a_Nss1,(6Mbps)_1TX	-	-	-	-	-
5180MHz	Pass	3.61	4.67	4.67	17.00
5200MHz	Pass	3.61	4.78	4.78	17.00
5240MHz	Pass	3.61	5.05	5.05	17.00
5260MHz	Pass	3.17	4.27	4.27	11.00
5300MHz	Pass	3.17	4.27	4.27	11.00
5320MHz	Pass	3.17	4.08	4.08	11.00
5500MHz	Pass	3.19	4.25	4.25	11.00
5580MHz	Pass	3.19	4.01	4.01	11.00
5700MHz	Pass	3.19	3.62	3.62	11.00
5720MHz Straddle 5.47-5.725GHz	Pass	3.19	4.26	4.26	11.00
5720MHz Straddle 5.725-5.85GHz	Pass	3.42	2.59	2.59	30.00
5745MHz	Pass	3.42	3.94	3.94	30.00
5785MHz	Pass	3.42	3.08	3.08	30.00
5825MHz	Pass	3.42	2.08	2.08	30.00
802.11be EHT20_Nss1,(MCS0)_1TX	-	-	-	-	-
5180MHz	Pass	3.61	4.39	4.39	17.00
5200MHz	Pass	3.61	4.45	4.45	17.00
5240MHz	Pass	3.61	4.77	4.77	17.00
5260MHz	Pass	3.17	4.43	4.43	11.00
5300MHz	Pass	3.17	4.05	4.05	11.00
5320MHz	Pass	3.17	3.80	3.80	11.00
5500MHz	Pass	3.19	4.06	4.06	11.00
5580MHz	Pass	3.19	3.92	3.92	11.00
5700MHz	Pass	3.19	2.07	2.07	11.00
5720MHz Straddle 5.47-5.725GHz	Pass	3.19	4.10	4.10	11.00
5720MHz Straddle 5.725-5.85GHz	Pass	3.42	2.32	2.32	30.00
5745MHz	Pass	3.42	3.67	3.67	30.00
5785MHz	Pass	3.42	3.01	3.01	30.00
5825MHz	Pass	3.42	1.89	1.89	30.00
802.11be EHT40_Nss1,(MCS0)_1TX	-	-	-	-	-
5190MHz	Pass	3.61	2.49	2.49	17.00
5230MHz	Pass	3.61	2.59	2.59	17.00
5270MHz	Pass	3.17	1.90	1.90	11.00
5310MHz	Pass	3.17	1.94	1.94	11.00
5510MHz	Pass	3.19	1.79	1.79	11.00
5550MHz	Pass	3.19	1.71	1.71	11.00
5670MHz	Pass	3.19	1.94	1.94	11.00
5710MHz Straddle 5.47-5.725GHz	Pass	3.19	1.88	1.88	11.00
5710MHz Straddle 5.725-5.85GHz	Pass	3.42	0.12	0.12	30.00
5755MHz	Pass	3.42	0.40	0.40	30.00
5795MHz	Pass	3.42	-0.37	-0.37	30.00
802.11be EHT80_Nss1,(MCS0)_1TX	-	-	-	-	-
5210MHz	Pass	3.61	-0.95	-0.95	17.00
5290MHz	Pass	3.17	-1.14	-1.14	11.00
5530MHz	Pass	3.19	-1.42	-1.42	11.00
5610MHz	Pass	3.19	-1.49	-1.49	11.00
5690MHz Straddle 5.47-5.725GHz	Pass	3.19	-1.43	-1.43	11.00
5690MHz Straddle 5.725-5.85GHz	Pass	3.42	-4.17	-4.17	30.00
5775MHz	Pass	3.42	-2.77	-2.77	30.00



Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
802.11be EHT160_Nss1,(MCS0)_1TX	-	-	-	-	-
5250MHz Straddle 5.15-5.25GHz	Pass	3.61	-3.29	-3.29	17.00
5250MHz Straddle 5.25-5.35GHz	Pass	3.17	-3.58	-3.58	11.00
5570MHz	Pass	3.19	-4.82	-4.82	11.00

DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;
Inf = There's no restriction for the limit.

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_1TX

PSD

5240MHz

20/05/2025

CF (Hz)
5.24G


Span (Hz)
30M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
30.452

Detector Type
RMS

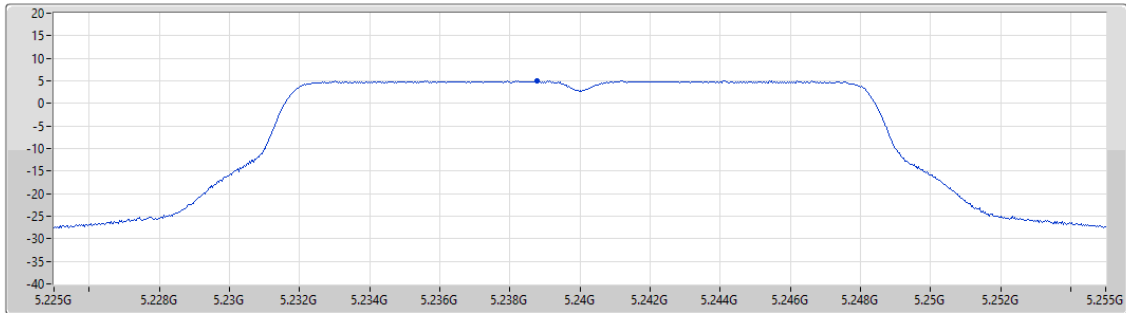

Port 1

Sum	PD	Port 1
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
5.05	5.05	5.05

5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_1TX

PSD

5240MHz

20/05/2025

CF (Hz)
5.24G


Span (Hz)
30M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
29.027

Detector Type
RMS

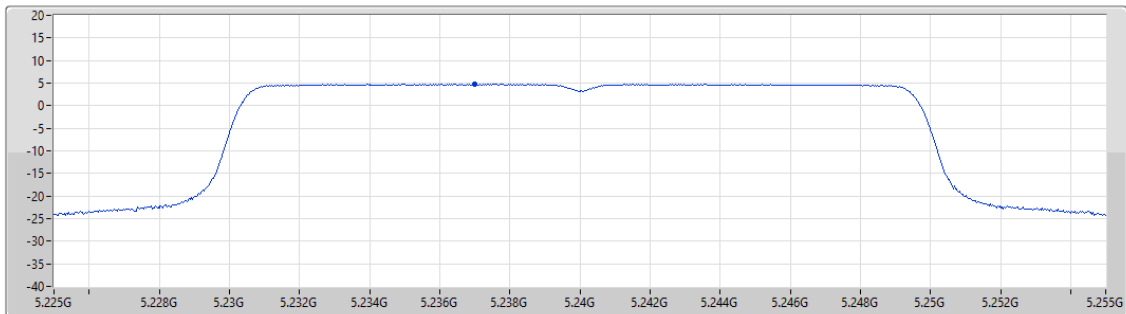

Port 1


Sum	PD	Port 1
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
4.77	4.77	4.77

5.15-5.25GHz_802.11be EHT40_Nss1,(MCS0)_1TX

PSD

5230MHz

20/05/2025

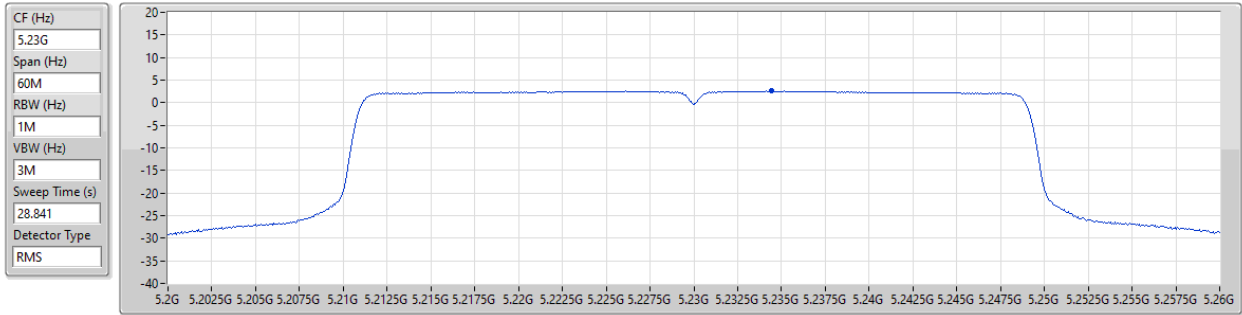


Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
2.59	2.59	2.59

5.15-5.25GHz_802.11be EHT80_Nss1,(MCS0)_1TX

PSD

5210MHz

20/05/2025

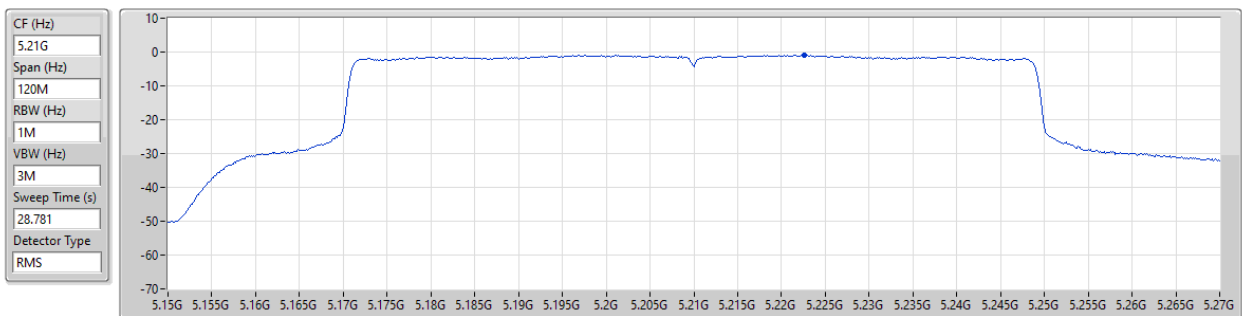


Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-0.95	-0.95	-0.95

5.15-5.25GHz_802.11be EHT160_Nss1,(MCS0)_1TX

PSD

5250MHz Straddle 5.15-5.25GHz

20/05/2025

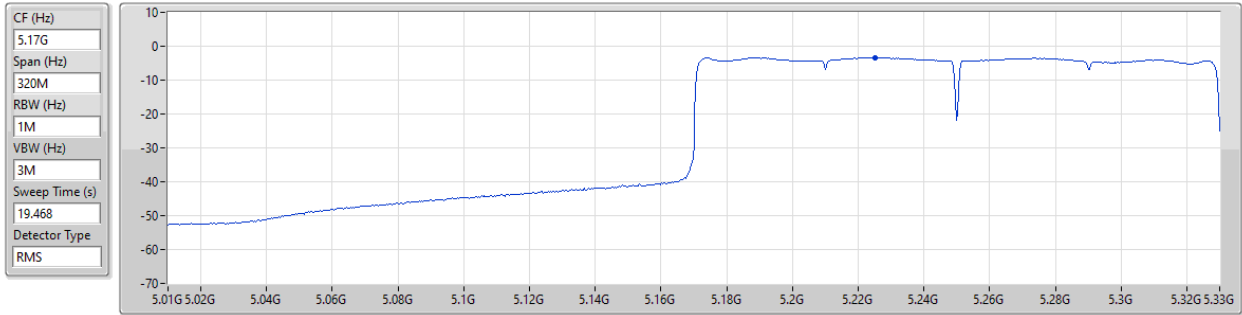


Sum	PD	Port 1
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-3.29	-3.29	-3.29

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_1TX

PSD

5260MHz

20/05/2025

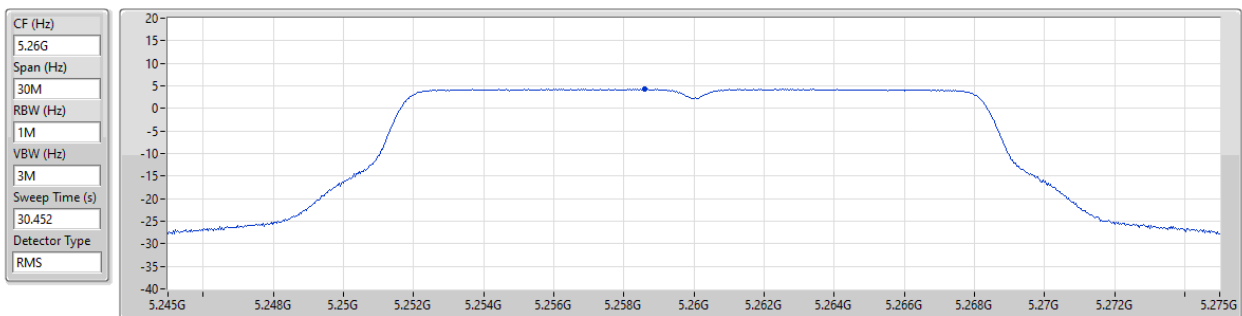

Sum	PD	Port 1
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
4.27	4.27	4.27

5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_1TX

PSD

5260MHz

20/05/2025

CF (Hz)
5.26G


Span (Hz)
30M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
29.027

Detector Type
RMS

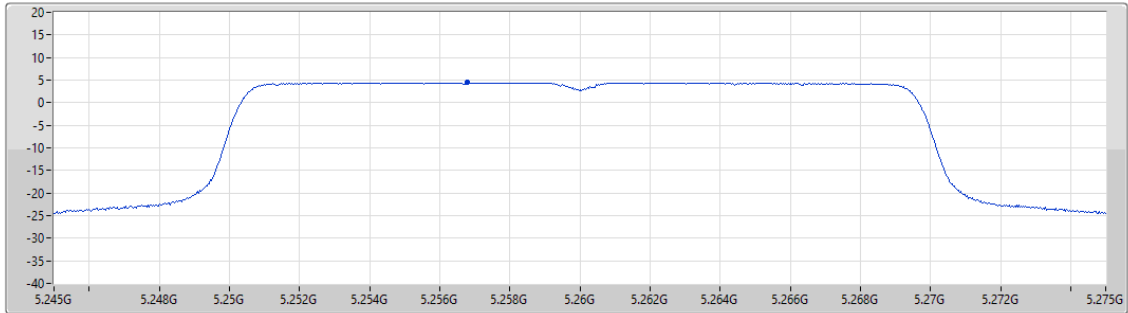

Port 1

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
4.43	4.43	4.43

5.25-5.35GHz_802.11be EHT40_Nss1,(MCS0)_1TX

PSD

5310MHz

20/05/2025

CF (Hz)
5.31G


Span (Hz)
60M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
28.841

Detector Type
RMS

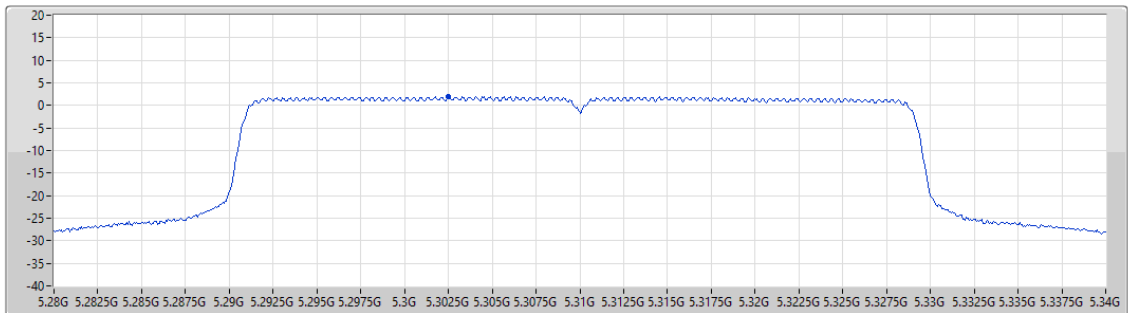

Port 1

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
1.94	1.94	1.94

5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0)_1TX

PSD

5290MHz

20/05/2025

CF (Hz)
5.29G


Span (Hz)
120M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
28.781

Detector Type
RMS

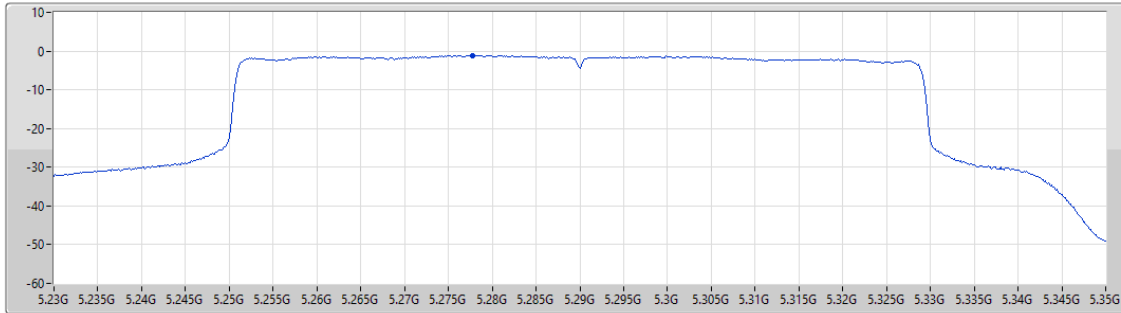

Port 1

Sum	PD	Port 1
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-1.14	-1.14	-1.14

5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0)_1TX

PSD

5250MHz Straddle 5.25-5.35GHz

20/05/2025

CF (Hz)
5.33G


Span (Hz)
320M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
19.468

Detector Type
RMS

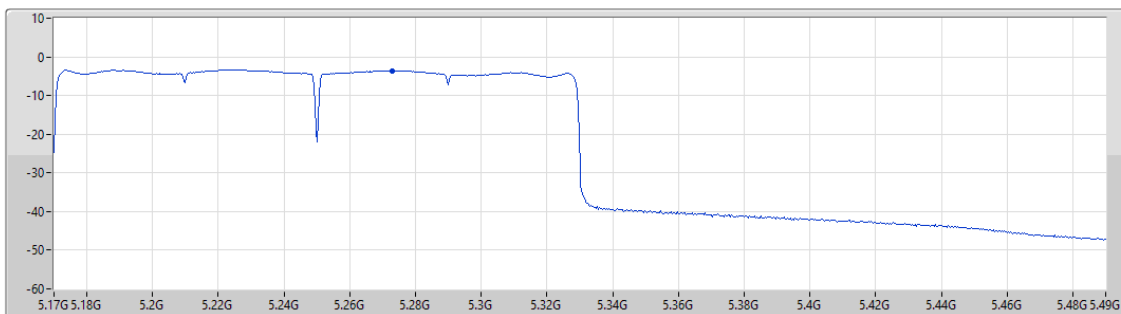

Port 1


Sum	PD	Port 1
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-3.58	-3.58	-3.58

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_1TX

PSD

5720MHz Straddle 5.47-5.725GHz

20/05/2025

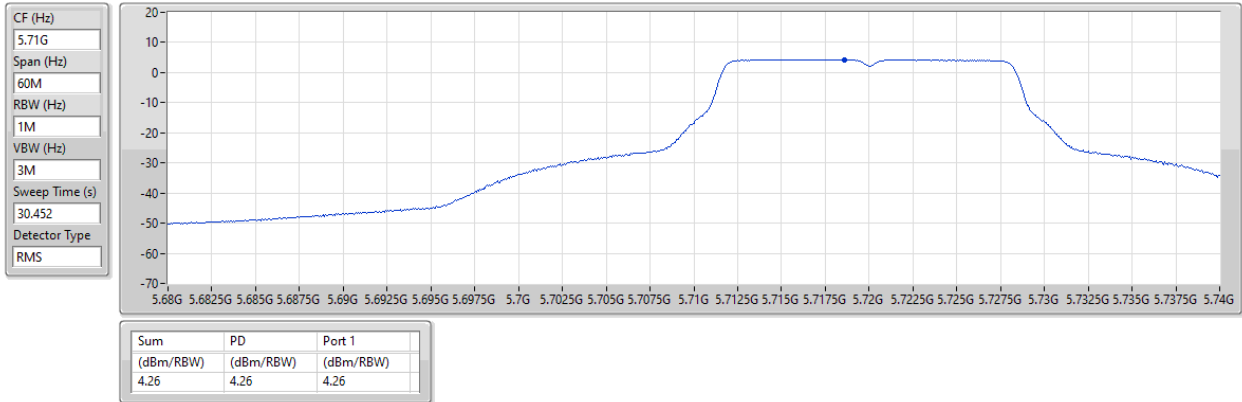


5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_1TX

PSD

5720MHz Straddle 5.47-5.725GHz

20/05/2025

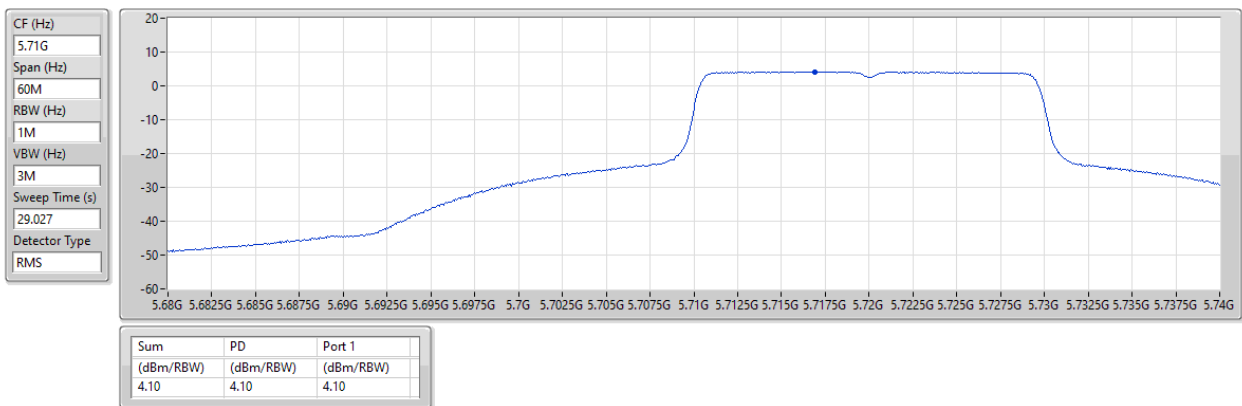

5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_1TX

PSD

5670MHz

20/05/2025

CF (Hz)
5.67G


Span (Hz)
60M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
28.841

Detector Type
RMS

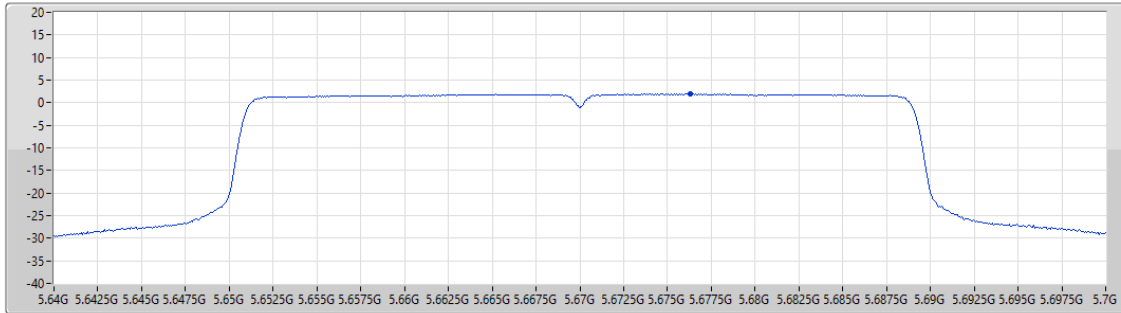

Port 1

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
1.94	1.94	1.94

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0)_1TX

PSD

5530MHz

20/05/2025

CF (Hz)
5.53G


Span (Hz)
120M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
28.781

Detector Type
RMS

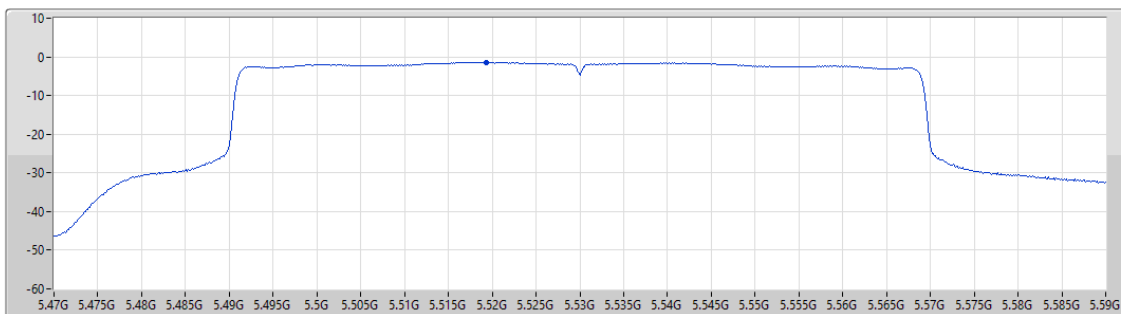

Port 1


Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-1.42	-1.42	-1.42

5.47-5.725GHz_802.11be EHT160_Nss1,(MCS0)_1TX

PSD

5570MHz

20/05/2025

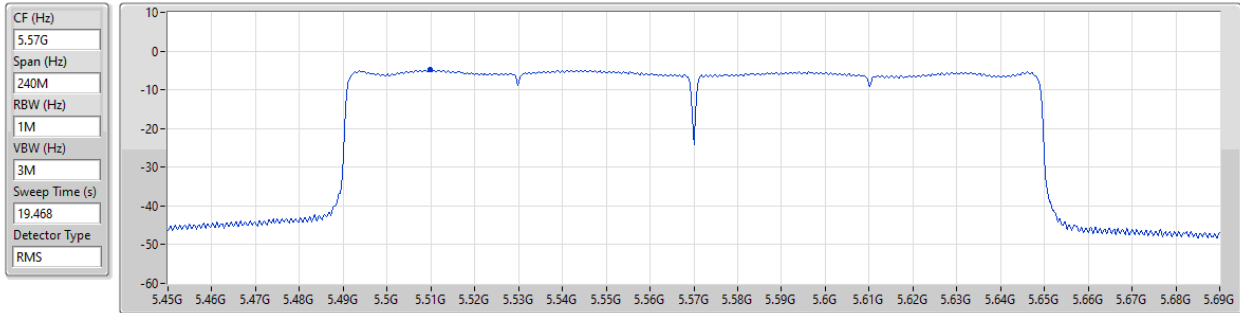


Sum	PD	Port 1
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-4.82	-4.82	-4.82

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_1TX

PSD

5745MHz

20/05/2025

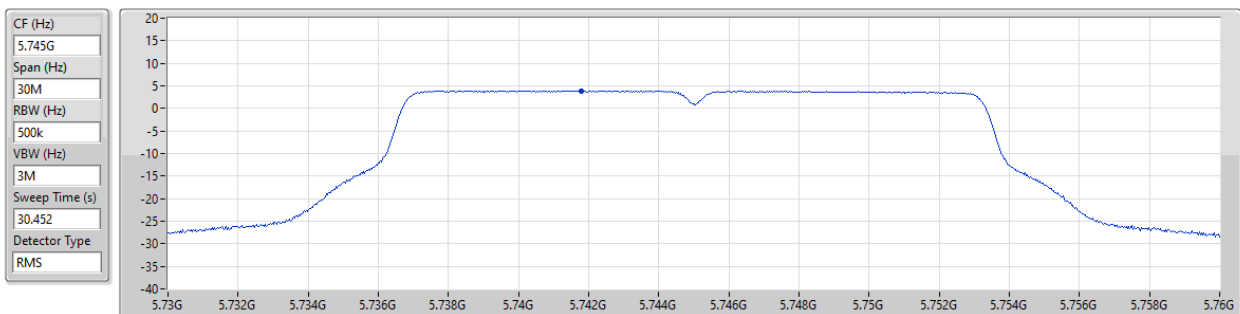

Sum	PD	Port 1
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
3.94	3.94	3.94