

FCC CERTIFICATION TEST REPORT

FOR

Applicant	:	Guangzhou FiiO Electronics Technology Co., Ltd.
Address	:	2/F, F Building, Hougang Industrial Zone, Shigang Village, Huangshi West Road, Baiyun District, Guangzhou City, China.
Equipment under Test	:	Portable High Resolution Music Player
Model No.	:	M11 Plus, M11S, M17, M15s, M15 Plus, M17s, M17 Pro, M17 Plus, R9, R9s, R9 Pro, R9 Plus, R5, R7
Trade Mark	:	FiiO
FCC ID	:	R56-FCIDQM
Manufacturer	:	Guangzhou FiiO Electronics Technology Co., Ltd.
Address	:	2/F, F Building, Hougang Industrial Zone, Shigang Village, Huangshi West Road, Baiyun District, Guangzhou City, China.

Issued By: Dongguan Dongdian Testing Service Co., Ltd.

Add.: No. 17, Zongbu Road 2, Songshan Lake Sci&Tech, Industry Park,
Dongguan City, Guangdong Province, China, 523808

Tel.: +86-0769-38826678, **E-mail:** ddt@dgddt.com, <http://www.dgddt.com>

REPORT

Table of Contents

	Test report declares.....	4
1.	Summary of Test Results.....	6
2.	General Test Information	7
2.1.	Description of EUT	7
2.2.	Accessories of EUT.....	7
2.3.	Assistant equipment used for test.....	7
2.4.	Block diagram of EUT configuration for test.....	8
2.5.	Deviations of test standard.....	8
2.6.	Test environment conditions	8
2.7.	Test laboratory.....	9
2.8.	Measurement uncertainty.....	9
3.	Equipment Used During Test.....	10
4.	6 dB Bandwidth and 99% Bandwidth	12
4.1.	Block diagram of test setup.....	12
4.2.	Limits	12
4.3.	Test procedure	12
4.4.	Test result.....	13
4.5.	Original test data	14
5.	Conducted Peak Output Power.....	23
5.1.	Block diagram of test setup.....	23
5.2.	Limits	23
5.3.	Test procedure	23
5.4.	Test result.....	23
6.	Power Spectral Density.....	24
6.1.	Block diagram of test setup.....	24
6.2.	Limits	24
6.3.	Test procedure	24
6.4.	Test result.....	24
6.5.	Original test data	25
7.	Band Edge and Spurious Emissions (Conducted).....	30
7.1.	Block diagram of test setup.....	30
7.2.	Limits	30
7.3.	Test procedure	30
7.4.	Test result.....	31
7.5.	Original test data	31
8.	Radiated Spurious Emissions	47

8.1.	Block diagram of test setup.....	47
8.2.	Limit.....	48
8.3.	Test procedure	49
8.4.	Test result.....	51
9.	Radiated Band Edge Compliance.....	56
9.1.	Block diagram of test setup.....	56
9.2.	Limit.....	56
9.3.	Test procedure	56
9.4.	Test result.....	56
10.	Power Line Conducted Emission	73
10.1.	Block diagram of test setup.....	73
10.2.	Power line conducted emission limits (Class B).....	73
10.3.	Test procedure	73
10.4.	Test result.....	74
11.	Antenna Requirements	77
11.1.	Limit.....	77
11.2.	Result	77

Test Report Declare

Applicant	:	Guangzhou FiiO Electronics Technology Co., Ltd.
Address	:	2/F, F Building, Hougang Industrial Zone, Shigang Village, Huangshi West Road, Baiyun District, Guangzhou City, China.
Equipment under Test	:	Portable High Resolution Music Player
Model No	:	M11 Plus, M11S, M17, M15s, M15 Plus, M17s, M17 Pro, M17 Plus, R9, R9s, R9 Pro, R9 Plus, R5, R7
Trade Mark	:	FiiO
Manufacturer	:	Guangzhou FiiO Electronics Technology Co., Ltd.
Address	:	2/F, F Building, Hougang Industrial Zone, Shigang Village, Huangshi West Road, Baiyun District, Guangzhou City, China.

Test Standard Used: FCC Rules and Regulations Part 15 Subpart C.

Test procedure used: ANSI C63.10:2013, 558074 D01 15.247 Meas Guidance v05r02

We Declare:

The equipment described above is tested by Dongguan Dongdian Testing Service Co., Ltd and in the configuration tested the equipment complied with the standards specified above. The test results are contained in this test report and Dongguan Dongdian Testing Service Co., Ltd is assumed of full responsibility for the accuracy and completeness of these tests.

After test and evaluation, our opinion is that the equipment provided for test compliance with the requirement of the above FCC standards.

Report No:	DDT-R21052802-2E03		
Date of Receipt:	May 28, 2021	Date of Test:	May 28, 2021 ~ Aug. 13, 2021

Prepared By:

Sam Li

Sam Li/Engineer

Approved By:



Damon Hu/EMC Manager

Note: This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Dongguan Dongdian Testing Service Co., Ltd.

Revision History

Rev.	Revisions	Issue Date	Revised By
---	Initial issue	Aug. 16, 2021	

1. Summary of Test Results

The EUT have been tested according to the applicable standards as referenced below.		
Description of Test Item	Standard	Results
6 dB Bandwidth and 99% Bandwidth	FCC 15.247 (a) (2)	Pass
Conducted Output Power	FCC 15.247 (b) (3)	Pass
Power Spectral Density	FCC 15.247 (e)	Pass®
Band-edge and Spurious Emissions (Conducted)	FCC 15.247 (d)	Pass
Radiated Spurious Emissions	FCC 15.247 (d) FCC 15.209 FCC 15.205®	Pass
Radiated Band Edge Compliance	FCC 15.247 (d) FCC 15.209 FCC 15.205®	Pass
Power Line Conducted Emission	FCC 15.207	Pass
Antenna requirement	FCC 15.203	Pass

2. General Test Information

2.1. Description of EUT

EUT* Name	: Portable High Resolution Music Player
Model Number	: M11 Plus, M11S, M17, M15s, M15 Plus, M17s, M17 Pro, M17 Plus, R9, R9s, R9 Pro, R9 Plus, R5, R7
Model difference	: Only the appearance and model are different, there is no other difference. So, choose M11 Plus to test.
EUT function description	: Please reference user manual of this device
Power Supply	: DC 5V from external AC Adapter DC 3.8V built-in battery
Radio Technology	: IEEE 802.11b/g/n
Operation frequency	: IEEE 802.11b: 2412 MHz - 2462 MHz IEEE 802.11g: 2412 MHz - 2462 MHz IEEE 802.11n HT20: 2412 MHz - 2462 MHz IEEE 802.11n HT40: 2422 MHz - 2452 MHz
Modulation	: IEEE 802.11b: DSSS (CCK, DQPSK, DBPSK) IEEE 802.11g: OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n HT20: OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n HT40: OFDM (64QAM, 16QAM, QPSK, BPSK)
Transmitter rate	: IEEE 802.11b: 1, 2, 5.5, 11 Mbps IEEE 802.11g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps IEEE 802.11n HT20: 6.5, 13, 19.5, 26, 39, 52, 58.5, 65, 78, 104, 117, 130 Mbps IEEE 802.11n HT40: 13.5, 27, 40.5, 54, 81, 108, 121.5, 135 Mbps
Antenna Type	: Dedicated FPC antenna, maximum PK gain: 1.22 dBi
Serial Number	: N/A

Note: EUT is the abbreviation of equipment under test.

Channel information					
CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)
1	2412	5	2432	9	2452
2	2417	6	2437	10	2457
3	2422	7	2442	11	2462
4	2427	8	2447	/	/

2.2. Accessories of EUT

Description of Accessories	Manufacturer	Model number	Description	Remark
N/A	N/A	N/A	N/A	N/A

2.3. Assistant equipment used for test

Assistant equipment	Manufacturer	Model number	EMC Compliance	SN
---------------------	--------------	--------------	----------------	----

N/A	N/A	N/A	N/A	N/A
-----	-----	-----	-----	-----

2.4. Block diagram of EUT configuration for test



Test software: QRCT Version 4

The test software was used to control EUT work in Continuous Tx mode, and select test channel, wireless mode as below table.

Tested mode, channel, and data rate information				
Mode	Setting Tx Power	data rate (Mbps) (see Note)	Channel	Frequency (MHz)
IEEE 802.11b	9	1	LCH: CH1	2412
	9	1	MCH: CH6	2437
	9	1	HCH: CH11	2462
IEEE 802.11g	9	6	LCH: CH1	2412
	9	6	MCH: CH6	2437
	9	6	HCH: CH11	2462
IEEE 802.11n HT20	9	MCS0	LCH: CH1	2412
	9	MCS0	MCH: CH6	2437
	9	MCS0	HCH: CH11	2462
IEEE 802.11n HT40	9	MCS0	LCH: CH3	2422
	9	MCS0	MCH: CH6	2437
	9	MCS0	HCH: CH9	2452
Note: According exploratory test, EUT will have maximum output power in those data rate, so those data rate were used for all test.				

2.5. Deviations of test standard

No deviation

2.6. Test environment conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature range:	21-25 °C
Humidity range:	40-75%
Pressure range:	86-106 kPa

2.7. Test laboratory

Dongguan Dongdian Testing Service Co., Ltd.

Add.: No. 17, Zongbu Road 2, Songshan Lake Sci&Tech, Industry Park, Dongguan City, Guangdong Province, China, 523808.

Tel.: +86-0769-38826678, <http://www.dgddt.com>, Email: ddt@dgddt.com.

CNAS Accreditation No. L6451; A2LA Accreditation Number: 3870.01

FCC Designation Number: CN1182, Test Firm Registration Number: 540522

Innovation, Science and Economic Development Canada Site Registration Number: 10288A

Conformity Assessment Body identifier: CN0048

VCCI facility registration number: C-20087, T-20088, R-20123, G-20118

2.8. Measurement uncertainty

Test Item	Uncertainty
Bandwidth	1.1%
Peak Output Power (Conducted) (Spectrum Analyzer)	0.86 dB ($10 \text{ MHz} \leq f < 3.6 \text{ GHz}$); 1.38 dB ($3.6 \text{ GHz} \leq f < 8 \text{ GHz}$)
Peak Output Power (Conducted) (Power Sensor)	0.74 dB
Power Spectral Density	0.74 dB ($10 \text{ MHz} \leq f < 3.6 \text{ GHz}$); 1.38 dB ($3.6 \text{ GHz} \leq f < 8 \text{ GHz}$)
Frequencies Stability	6.7×10^{-8} (Antenna couple method) 5.5×10^{-8} (Conducted method)
Conducted Spurious Emissions	0.86 dB ($10 \text{ MHz} \leq f < 3.6 \text{ GHz}$); 1.40 dB ($3.6 \text{ GHz} \leq f < 8 \text{ GHz}$) 1.66 dB ($8 \text{ GHz} \leq f < 22 \text{ GHz}$)
Uncertainty for Radio Frequency (RBW < 20 kHz)	3×10^{-8}
Temperature	0.4 °C
Humidity	2 %
Uncertainty for Radiation Emission Test (30 MHz - 1 GHz)	4.70 dB (Antenna Polarize: V) 4.84 dB (Antenna Polarize: H)
Uncertainty for Radiation Emission Test (1 GHz - 40 GHz)	4.10 dB (1 - 6 GHz) 4.40 dB (6 GHz - 18 GHz) 3.54 dB (18 GHz - 26 GHz) 4.30 dB (26 GHz - 40 GHz)
Uncertainty for Power Line Conduction Emission Test	3.32 dB (150 kHz - 30 MHz)
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	


3. Equipment Used During Test

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
☐ RF Connected Test (Tonscend RF Measurement System 1#)					
Spectrum analyzer	R&S	FSU26	200071	Sep. 25, 2020	1 Year
Wideband Radio Communication tester	R&S	CMW500	117491	Jun. 01, 2021	1 Year
Vector Signal Generator	Agilent	E8267D	US49060192	Sep. 24, 2020	1 Year
Vector Signal Generator	Agilent	N5182A	MY48180737	Jun. 01, 2021	1 Year
RF Control Unit	Tonsend	JS0806-2	DDT-ZC0290	Jun. 01, 2021	1 Year
Temp&Humi Programmable	ZHIXIANG	ZXGDJS-150L	ZX170110-A	Jun. 01, 2021	1 Year
Test Software	JS Tonscend	JS1120-3	Ver.2.7	N/A	N/A
☒ RF Connected Test (Tonscend RF Measurement System 2#)					
Spectrum analyzer	R&S	FSU26	101472	Jun. 01, 2021	1 Year
Wideband Radio Communication tester	R&S	CMW500	120259	Jan. 19, 2021	1 Year
Vector Signal Generator	Agilent	N5182A	MY19060405	Jun. 01, 2021	1 Year
Vector Signal Generator	Agilent	N5182A	MY48180912	Jun. 01, 2021	1 Year
RF Control Unit	Tonsend	JS0806-2	DDT-ZC01449	Jun. 01, 2021	1 Year
Temp&Humi Programmable	ZHIXIANG	ZXGDJS-150L	ZX170110-A	Jun. 01, 2021	1 Year
Test Software	JS Tonscend	JS1120-3	Ver.2.7	N/A	N/A
☐ Radiation 1#chamber					
EMI Test Receiver	R&S	ESU8	100316	Sep. 24, 2020	1 Year
Spectrum analyzer	Agilent	E4447A	MY50180031	Jun. 01, 2021	1 Year
Trilog Broadband Antenna	Schwarzbeck	VULB9163	9163-462	Nov. 13, 2020	1 Year
Active Loop antenna	Schwarzbeck	FMZB-1519	1519-038	Nov. 18, 2020	1 Year
Double Ridged Horn Antenna	R&S	HF907	100276	Nov. 13, 2020	1 Year
Broad Band Horn Antenna	Schwarzbeck	BBHA 9170	790	May 07, 2021	1 Year
Pre-amplifier	A.H.	PAM-0118	360	Sep. 28, 2020	1 Year
RF Cable	HUBSER	CP-X2+ CP-X1	W11.03+ W12.02	Sep. 24, 2020	1 Year
RF Cable	N/A	5m+6m+1m	06270619	Sep. 30, 2020	1 Year
MI Cable	HUBSER	C10-01-01-1M	1091629	Sep. 30, 2020	1 Year
Test software	Audix	E3	V 6.11111b	N/A	N/A
☒ Radiation 2#chamber					
EMI Test Receiver	R&S	ESCI	101364	Sep. 28, 2020	1 Year
Spectrum analyzer	Agilent	E4447A	MY50180031	Jun. 01, 2021	1 Year

Trilog Broadband Antenna	Schwarzbeck	VULB 9163	9163-994	Nov. 13, 2020	1 Year
Active Loop antenna	Schwarzbeck	FMZB-1519	1519-038	Nov. 18, 2020	1 Year
Double Ridged Horn Antenna	Schwarzbeck	BBHA9120	02108	Jul. 17, 2021	1 Year
Broad Band Horn Antenna	Schwarzbeck	BBHA 9170	790	May 07, 2021	1 Year
Pre-amplifier	TERA-MW	TRLA-0040 G35	1013 03	Sep. 28, 2020	1 Year
RF Cable	N/A	14+1.5m	06270619	Sep. 28, 2020	1 Year
Test software	Audix	E3	V 6.11111b	N/A	N/A
☒ Power Line Conducted Emissions Test 1#					
EMI Test Receiver	R&S	ESU8	100316	Sep. 24, 2020	1 Year
LISN 1	R&S	ENV216	101109	Sep. 28, 2020	1 Year
LISN 2	R&S	ESH2-Z5	100309	Sep. 28, 2020	1 Year
Pulse Limiter	R&S	ESH3-Z2	101242	Sep. 24, 2020	1 Year
CE Cable 1	HUBSER	N/A	W10.01	Sep. 24, 2020	1 Year
Test software	Audix	E3	V 6.11111b	N/A	N/A
☐ Power Line Conducted Emissions Test 2#					
Test Receiver	R&S	ESPI	101761	Sep. 24, 2020	1 Year
LISN 1	R&S	ENV216	101170	Sep. 28, 2020	1 Year
LISN 2	R&S	ESH2-Z5	100309	Sep. 28, 2020	1 Year
Pulse Limiter	R&S	KH43101	43101180156 8-12#	Jun. 01, 2021	1 Year
CE Cable 2	HUBSER	N/A	W11.02	Sep. 24, 2020	1 Year
Test software	Audix	E3	V 6.11111b	N/A	N/A

4. 6 dB Bandwidth and 99% Bandwidth

4.1. Block diagram of test setup

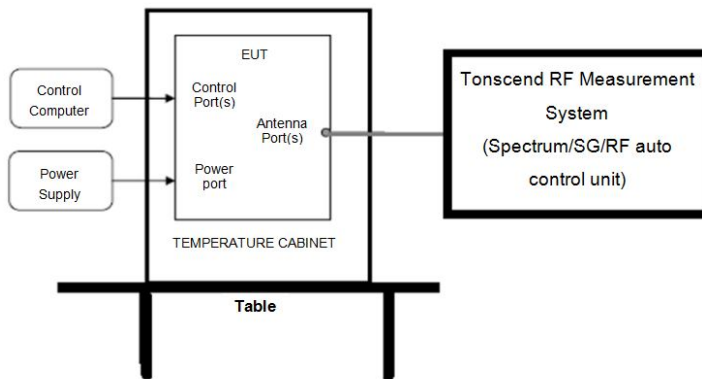

4.2. Limits

For direct sequence systems, the minimum 6 dB bandwidth shall be at least 500 kHz

4.3. Test procedure

(1) Connect EUT's antenna output to spectrum analyzer by RF cable.

(2) 99% Bandwidth set the spectrum analyzer as follows:

RBW:	300 kHz
VBW:	1 MHz
Detector Mode:	Peak
Sweep time:	auto
Trace mode	Max hold

(3) 6 dB Bandwidth set the spectrum analyzer as follows:

RBW:	100 kHz
VBW:	300 kHz
Detector Mode:	Peak
Sweep time:	auto
Trace mode	Max hold

(4) Allow the trace to stabilize, measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.


4.4. Test result


Test Mode	Test	Ant	6 dB Bandwidth [MHz]	Limit [MHz]	Verdict
11B	2412	Ant1	8.640	0.5	Pass
11B	2437	Ant1	9.120	0.5	Pass
11B	2462	Ant1	8.600	0.5	Pass
11G	2412	Ant1	15.800	0.5	Pass
11G	2437	Ant1	15.840	0.5	Pass
11G	2462	Ant1	15.480	0.5	Pass
11N20SISO	2412	Ant1	16.400	0.5	Pass
11N20SISO	2437	Ant1	16.440	0.5	Pass
11N20SISO	2462	Ant1	15.360	0.5	Pass
11N40SISO	2422	Ant1	35.200	0.5	Pass
11N40SISO	2437	Ant1	35.840	0.5	Pass
11N40SISO	2452	Ant1	35.280	0.5	Pass

Test Mode	Test	Ant	99% OBW [MHz]	Limit [MHz]	Verdict
11B	2412	Ant1	14.64	---	Pass
11B	2437	Ant1	14.68	---	Pass
11B	2462	Ant1	13.92	---	Pass
11G	2412	Ant1	17.56	---	Pass
11G	2437	Ant1	17.64	---	Pass
11G	2462	Ant1	17.12	---	Pass
11N20SISO	2412	Ant1	18.68	---	Pass
11N20SISO	2437	Ant1	18.68	---	Pass
11N20SISO	2462	Ant1	18.20	---	Pass
11N40SISO	2422	Ant1	36.16	---	Pass
11N40SISO	2437	Ant1	36.96	---	Pass
11N40SISO	2452	Ant1	36.64	---	Pass


4.5. Original test data

6 dB Bandwidth:

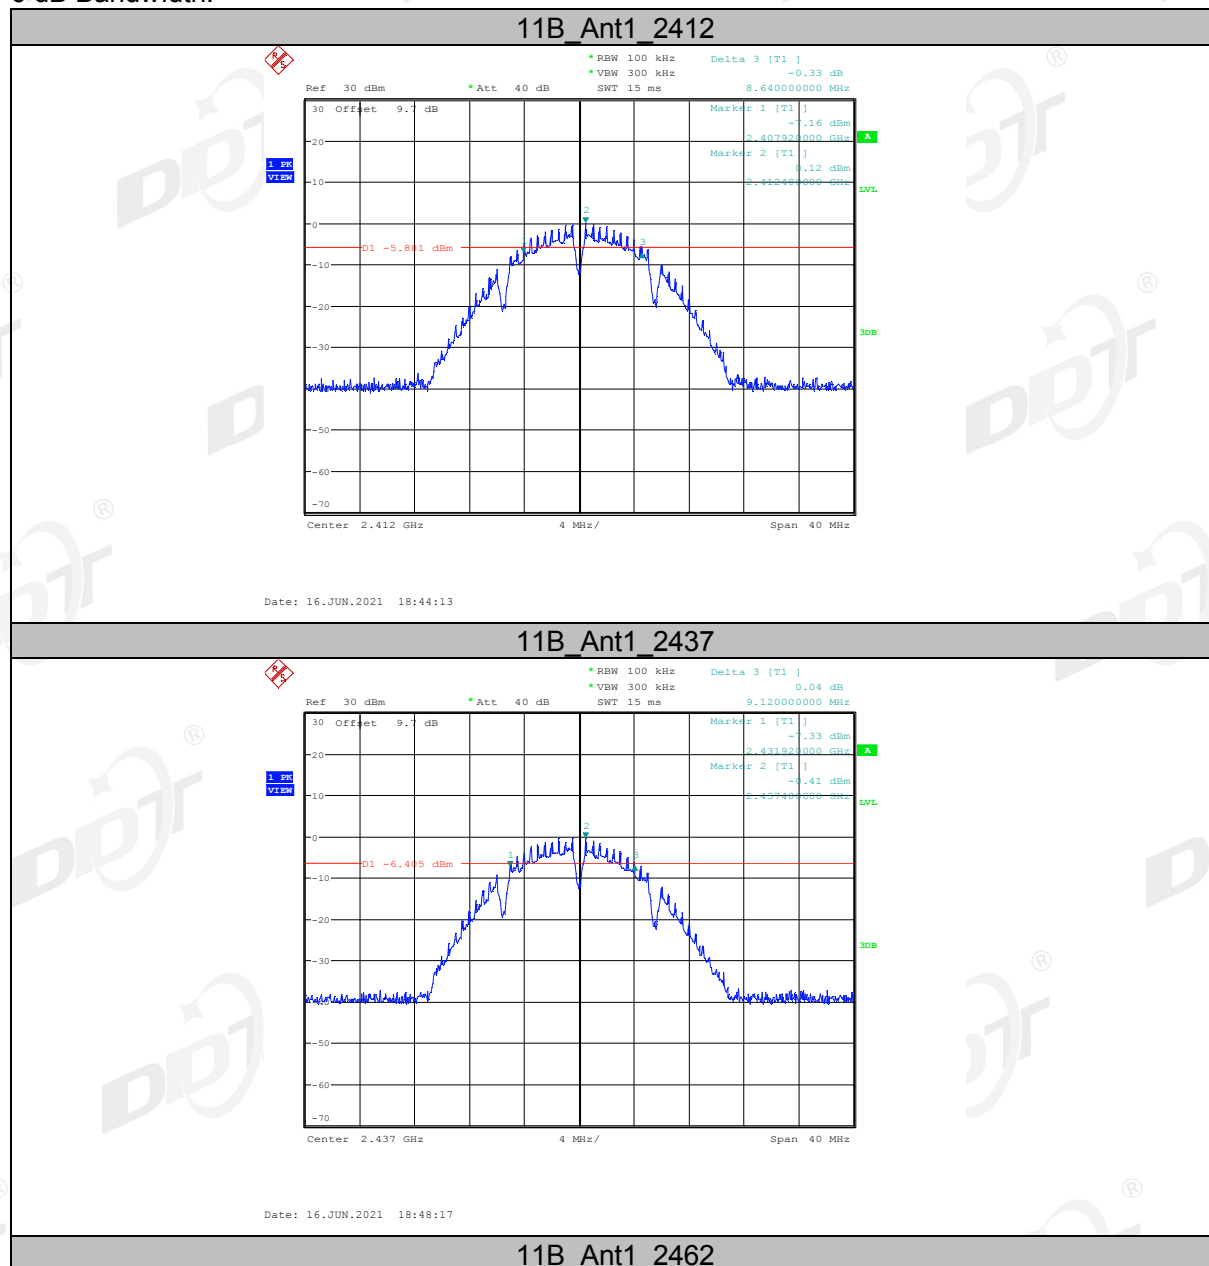


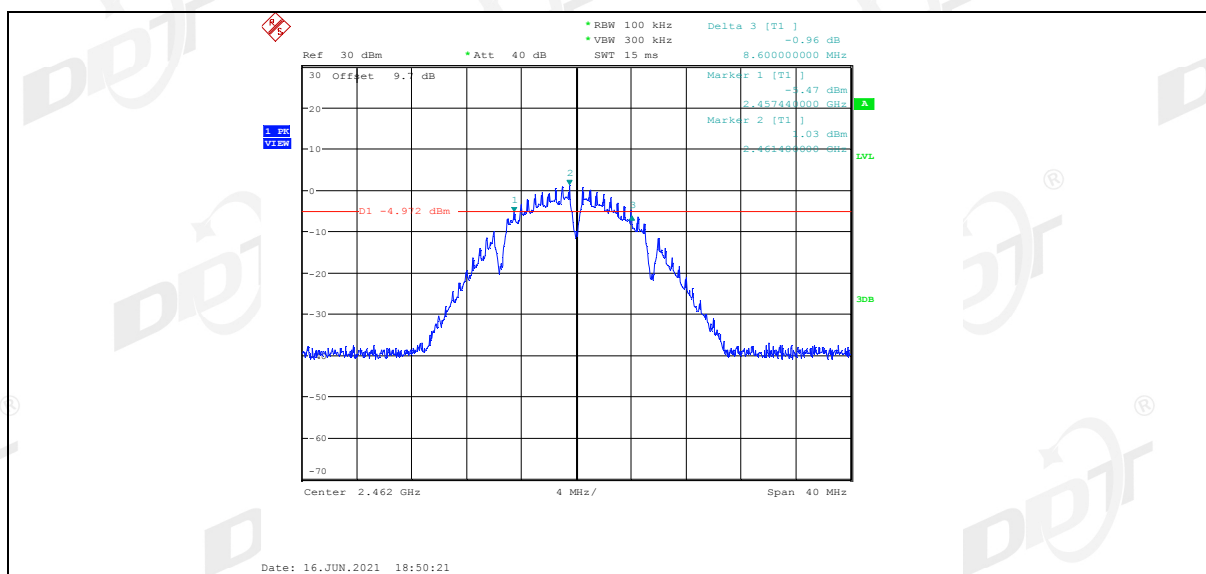

11G_Ant1_2412

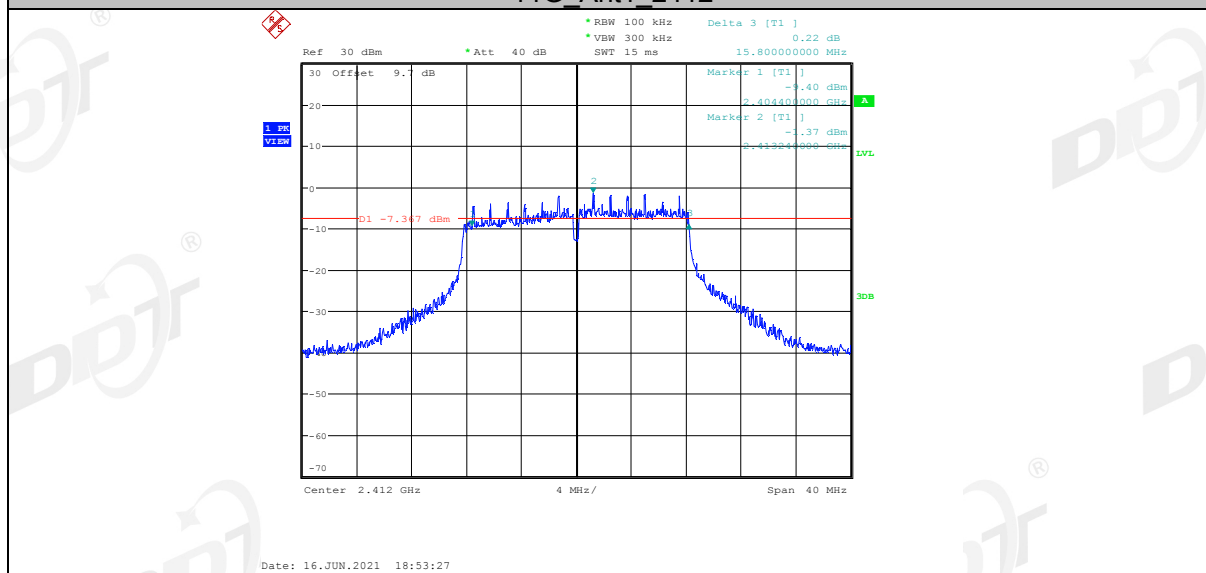

11G_Ant1_2437

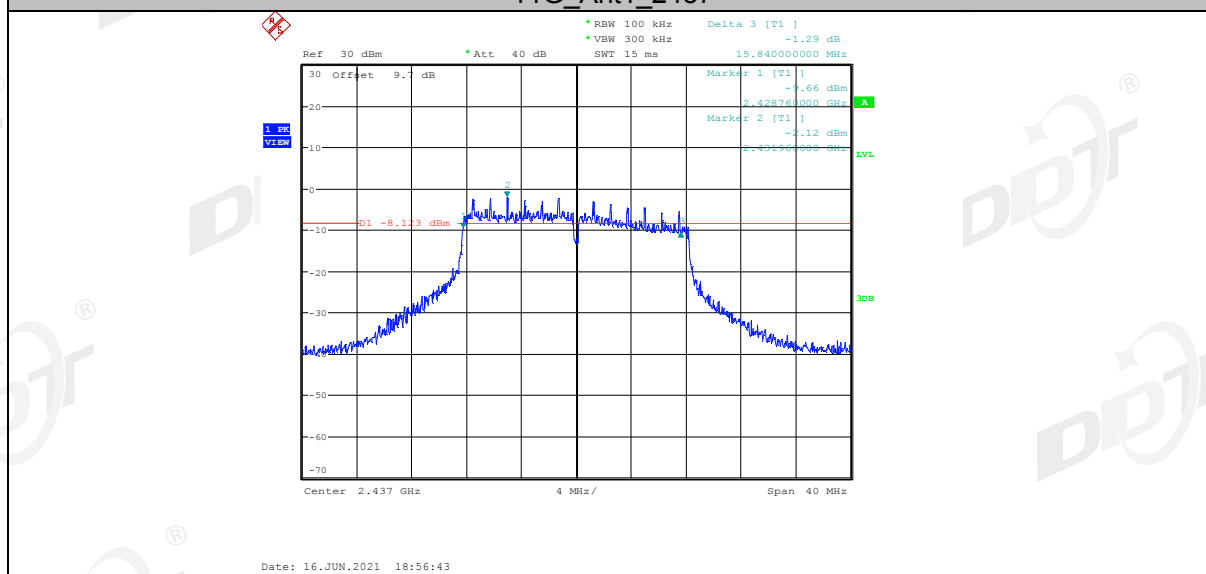

11G_Ant1_2462