

**Appendix G. Maximum Equivalent Isotropically Radiated Power(E.I.R.P.)****1.1. Test Result and Data**

For SISO-ANT A- U-NII-5

Modulation Type	Data Rate	Conducted Setting	Channel	Frequency (MHz)	Measured value of each antenna port (dBm)	Total conducted power (dBm)	Total conducted power (mW)	Antenna Gain (dBi)	Total E.I.R.P (dBm)	Total E.I.R.P (mW)	E.I.R.P Limit (dBm)
					ANT A						
11a	6 Mbps	10.5	1	5955	4.85	4.85	3.055	3.50	8.35	6.84	24.00
11a	6 Mbps	9	45	6175	5.15	5.15	3.273	3.50	8.65	7.33	24.00
11a	6 Mbps	6.5	93	6415	4.63	4.63	2.904	3.50	8.13	6.50	24.00

For SISO-ANT A - U-NII-6

Modulation Type	Data Rate	Conducted Setting	Channel	Frequency (MHz)	Measured value of each antenna port (dBm)	Total conducted power (dBm)	Total conducted power (mW)	Antenna Gain (dBi)	Total E.I.R.P (dBm)	Total E.I.R.P (mW)	E.I.R.P Limit (dBm)
					ANT A						
11a	6 Mbps	6.5	97	6435	5.14	5.14	3.266	3.50	8.64	7.31	24.00
11a	6 Mbps	6.5	105	6475	5.22	5.22	3.327	3.50	8.72	7.45	24.00
11a	6 Mbps	6.5	113	6515	5.31	5.31	3.396	3.50	8.81	7.60	24.00



For SISO-ANT A - U-NII-7

Modulation Type	Data Rate	Conducted Setting	Channel	Frequency (MHz)	Measured value of each antenna port (dBm)	Total conducted power (dBm)	Total conducted power (mW)	Antenna Gain (dBi)	Total E.I.R.P (dBm)	Total E.I.R.P (mW)	E.I.R.P Limit (dBm)
					ANT A						
11a	6 Mbps	6.5	117	6535	5.06	5.06	3.206	3.50	8.56	7.18	24.00
11a	6 Mbps	12	153	6715	5.53	5.53	3.573	3.50	9.03	8.00	24.00
11a	6 Mbps	12	181	6855	6.29	6.29	4.256	3.50	9.79	9.53	24.00

For SISO-ANT A - U-NII-8

Modulation Type	Data Rate	Conducted Setting	Channel	Frequency (MHz)	Measured value of each antenna port (dBm)	Total conducted power (dBm)	Total conducted power (mW)	Antenna Gain (dBi)	Total E.I.R.P (dBm)	Total E.I.R.P (mW)	E.I.R.P Limit (dBm)
					ANT A						
11a	6 Mbps	10.5	189	6895	5.27	5.27	3.365	3.50	8.77	7.53	24.00
11a	6 Mbps	8.5	213	7015	5.41	5.41	3.475	3.50	8.91	7.78	24.00
11a	6 Mbps	7.5	229	7095	4.88	4.88	3.076	3.50	8.38	6.89	24.00
11a	6 Mbps	7	233	7115	5.25	5.25	3.350	3.50	8.75	7.50	24.00



For SISO-ANT A

Maximum Conducted Output Power (Within 6525-6875MHz band)										
RF Output Power(dBm)										
Setting	Modulation Type	Data Rate	Frequency (MHz)	W/O Duty Factor Measured value of each antenna port (dBm)	W/O duty factor Total power (dBm)	Duty Factor (dB)	With duty factor Total power (dBm)	Antenna Gain (dBi)	With duty factor EIRP (dBm)	EIRP Limit (dBm)
				ANT A						
15.5	11a	6 Mbps	6875	5.84	5.84	0.00	5.84	3.50	9.34	24.00

Maximum Conducted Output Power (Extends across 6875MHz band)										
RF Output Power(dBm)										
Setting	Modulation Type	Data Rate	Frequency (MHz)	W/O Duty Factor Measured value of each antenna port (dBm)	W/O duty factor Total power (dBm)	Duty Factor (dB)	With duty factor Total power (dBm)	Antenna Gain (dBi)	With duty factor EIRP (dBm)	EIRP Limit (dBm)
				ANT A						
15.5	11a	6 Mbps	6875	6.01	6.01	0.00	6.01	3.50	9.51	24.00



For SISO-ANT B- U-NII-5

Modulation Type	Data Rate	Conducted Setting	Channel	Frequency (MHz)	Measured value of each antenna port (dBm)	Total conducted power (dBm)	Total conducted power (mW)	Antenna Gain (dBi)	Total E.I.R.P (dBm)	Total E.I.R.P (mW)	E.I.R.P Limit (dBm)
					ANT B						
11a	6 Mbps	10.5	1	5955	4.68	4.68	2.938	3.50	8.18	6.58	24.00
11a	6 Mbps	9	45	6175	0.66	0.66	1.164	3.50	4.16	2.61	24.00
11a	6 Mbps	6.5	93	6415	3.03	3.03	2.009	3.50	6.53	4.50	24.00

For SISO-ANT B - U-NII-6

Modulation Type	Data Rate	Conducted Setting	Channel	Frequency (MHz)	Measured value of each antenna port (dBm)	Total conducted power (dBm)	Total conducted power (mW)	Antenna Gain (dBi)	Total E.I.R.P (dBm)	Total E.I.R.P (mW)	E.I.R.P Limit (dBm)
					ANT B						
11a	6 Mbps	6.5	97	6435	2.99	2.99	1.991	3.50	6.49	4.46	24.00
11a	6 Mbps	6.5	105	6475	2.70	2.70	1.862	3.50	6.20	4.17	24.00
11a	6 Mbps	6.5	113	6515	2.63	2.63	1.832	3.50	6.13	4.10	24.00



For SISO-ANT B - U-NII-7

Modulation Type	Data Rate	Conducted Setting	Channel	Frequency (MHz)	Measured value of each antenna port (dBm)	Total conducted power (dBm)	Total conducted power (mW)	Antenna Gain (dBi)	Total E.I.R.P (dBm)	Total E.I.R.P (mW)	E.I.R.P Limit (dBm)
					ANT B						
11a	6 Mbps	6.5	117	6535	2.27	2.27	1.687	3.50	5.77	3.78	24.00
11a	6 Mbps	12	153	6715	5.22	5.22	3.327	3.50	8.72	7.45	24.00
11a	6 Mbps	12	181	6855	6.23	6.23	4.198	3.50	9.73	9.40	24.00

For SISO-ANT B - U-NII-8

Modulation Type	Data Rate	Conducted Setting	Channel	Frequency (MHz)	Measured value of each antenna port (dBm)	Total conducted power (dBm)	Total conducted power (mW)	Antenna Gain (dBi)	Total E.I.R.P (dBm)	Total E.I.R.P (mW)	E.I.R.P Limit (dBm)
					ANT B						
11a	6 Mbps	10.5	189	6895	5.23	5.23	3.334	3.50	8.73	7.46	24.00
11a	6 Mbps	8.5	213	7015	3.14	3.14	2.061	3.50	6.64	4.61	24.00
11a	6 Mbps	7.5	229	7095	0.97	0.97	1.250	3.50	4.47	2.80	24.00
11a	6 Mbps	7	233	7115	0.62	0.62	1.153	3.50	4.12	2.58	24.00



For SISO-ANT B

Maximum Conducted Output Power (Within 6525-6875MHz band)										
RF Output Power(dBm)										
Setting	Modulation Type	Data Rate	Frequency (MHz)	W/O Duty Factor Measured value of each antenna port (dBm)	W/O duty factor Total power (dBm)	Duty Factor (dB)	With duty factor Total power (dBm)	Antenna Gain (dBi)	With duty factor EIRP (dBm)	EIRP Limit (dBm)
				ANT B						
15.5	11a	6 Mbps	6875	5.82	5.82	0.00	5.82	3.50	9.32	24.00

Maximum Conducted Output Power (Extends across 6875MHz band)										
RF Output Power(dBm)										
Setting	Modulation Type	Data Rate	Frequency (MHz)	W/O Duty Factor Measured value of each antenna port (dBm)	W/O duty factor Total power (dBm)	Duty Factor (dB)	With duty factor Total power (dBm)	Antenna Gain (dBi)	With duty factor EIRP (dBm)	EIRP Limit (dBm)
				ANT B						
15.5	11a	6 Mbps	6875	5.70	5.70	0.00	5.70	3.50	9.20	24.00



For MIMO- U-NII-5

Modulation Type	Data Rate	Setting	Channel	Frequency (MHz)	Measured value of each antenna port (dBm)		Total conducted power (dBm)	Total conducted power (mW)	Antenna Gain (dBi)	Total E.I.R.P (dBm)	Total E.I.R.P (mW)	E.I.R.P Limit (dBm)
					ANT A	ANT B						
11ax HE20	NSS1-MCS0	5	1	5955	-0.83	-1.24	1.98	1.578	3.50	5.48	3.53	24.00
11ax HE20	NSS1-MCS0	5	45	6175	0.07	-3.19	1.75	1.496	3.50	5.25	3.35	24.00
11ax HE20	NSS1-MCS0	1.5	93	6415	-0.43	-2.45	1.69	1.475	3.50	5.19	3.30	24.00
11ax HE40	NSS1-MCS0	7.5	3	5965	1.82	1.17	4.52	2.830	3.50	8.02	6.33	24.00
11ax HE40	NSS1-MCS0	8	43	6165	3.65	-0.62	5.03	3.184	3.50	8.53	7.13	24.00
11ax HE40	NSS1-MCS0	4	91	6405	2.33	0.58	4.55	2.853	3.50	8.05	6.39	24.00
11ax HE80	NSS1-MCS0	11	7	5985	5.26	4.08	7.72	5.916	3.50	11.22	13.24	24.00
11ax HE80	NSS1-MCS0	10.5	39	6145	5.76	1.45	7.13	5.163	3.50	10.63	11.56	24.00
11ax HE80	NSS1-MCS0	7	87	6385	4.70	2.96	6.93	4.928	3.50	10.43	11.03	24.00
11ax HE160	NSS1-MCS0	14.5	15	6025	8.96	6.65	10.97	12.494	3.50	14.47	27.97	24.00
11ax HE160	NSS1-MCS0	13.5	47	6185	9.03	5.81	10.72	11.809	3.50	14.22	26.44	24.00
11ax HE160	NSS1-MCS0	11	79	6345	8.19	6.16	10.30	10.722	3.50	13.80	24.00	24.00

For MIMO- U-NII-6

Modulation Type	Data Rate	Setting	Channel	Frequency (MHz)	Measured value of each antenna port (dBm)		Total conducted power (dBm)	Total conducted power (mW)	Antenna Gain (dBi)	Total E.I.R.P (dBm)	Total E.I.R.P (mW)	E.I.R.P Limit (dBm)
					ANT A	ANT B						
11ax HE20	NSS1-MCS0	0.5	97	6435	-0.38	-2.57	1.67	1.470	3.50	5.17	3.29	24.00
11ax HE20	NSS1-MCS0	2	105	6475	-0.59	-2.77	1.47	1.401	3.50	4.97	3.14	24.00
11ax HE20	NSS1-MCS0	3	113	6515	0.17	-3.14	1.83	1.525	3.50	5.33	3.41	24.00
11ax HE40	NSS1-MCS0	4	99	6445	2.67	0.23	4.63	2.904	3.50	8.13	6.50	24.00
11ax HE40	NSS1-MCS0	5	107	6485	3.01	0.03	4.78	3.007	3.50	8.28	6.73	24.00
11ax HE80	NSS1-MCS0	7.5	103	6465	5.66	3.10	7.58	5.723	3.50	11.08	12.81	24.00



For MIMO- U-NII-7

Modulation Type	Data Rate	Setting	Channel	Frequency (MHz)	Measured value of each antenna port (dBm)		Total conducted power (dBm)	Total conducted power (mW)	Antenna Gain (dBi)	Total E.I.R.P (dBm)	Total E.I.R.P (mW)	E.I.R.P Limit (dBm)
					ANT A	ANT B						
11ax HE20	NSS1-MCS0	2.5	117	6535	-0.25	-2.81	1.67	1.468	3.50	5.17	3.29	24.00
11ax HE20	NSS1-MCS0	6	153	6715	-0.86	-0.74	2.21	1.664	3.50	5.71	3.72	24.00
11ax HE20	NSS1-MCS0	6	181	6855	0.20	0.17	3.20	2.087	3.50	6.70	4.67	24.00
11ax HE40	NSS1-MCS0	6.5	123	6565	3.56	0.89	5.44	3.497	3.50	8.94	7.83	24.00
11ax HE40	NSS1-MCS0	9.5	155	6725	2.76	2.04	5.43	3.488	3.50	8.93	7.81	24.00
11ax HE40	NSS1-MCS0	9	179	6845	2.67	2.51	5.60	3.632	3.50	9.10	8.13	24.00
11ax HE80	NSS1-MCS0	10.5	135	6625	5.44	3.72	7.67	5.855	3.50	11.17	13.11	24.00
11ax HE80	NSS1-MCS0	11.5	151	6705	4.61	4.41	7.52	5.651	3.50	11.02	12.65	24.00
11ax HE80	NSS1-MCS0	12	167	6785	4.86	4.72	7.80	6.027	3.50	11.30	13.49	24.00
11ax HE160	NSS1-MCS0	13	143	6665	6.91	6.43	9.69	9.304	3.50	13.19	20.83	24.00

For MIMO- U-NII-8

Modulation Type	Data Rate	Setting	Channel	Frequency (MHz)	Measured value of each antenna port (dBm)		Total conducted power (dBm)	Total conducted power (mW)	Antenna Gain (dBi)	Total E.I.R.P (dBm)	Total E.I.R.P (mW)	E.I.R.P Limit (dBm)
					ANT A	ANT B						
11ax HE20	NSS1-MCS0	5	189	6895	-0.11	-0.59	2.67	1.848	3.50	6.17	4.14	24.00
11ax HE20	NSS1-MCS0	4.5	213	7015	1.38	-2.49	2.87	1.938	3.50	6.37	4.34	24.00
11ax HE20	NSS1-MCS0	3	229	7095	-0.42	-2.56	1.65	1.462	3.50	5.15	3.27	24.00
11ax HE20	NSS1-MCS0	3.5	233	7115	-0.31	-2.58	1.71	1.483	3.50	5.21	3.32	24.00
11ax HE40	NSS1-MCS0	6.5	195	6925	2.47	1.42	4.99	3.153	3.50	8.49	7.06	24.00
11ax HE40	NSS1-MCS0	6.5	211	7005	3.29	-0.29	4.87	3.068	3.50	8.37	6.87	24.00
11ax HE40	NSS1-MCS0	6	227	7085	3.06	-1.09	4.47	2.801	3.50	7.97	6.27	24.00
11ax HE80	NSS1-MCS0	9.5	199	6945	5.19	3.91	7.61	5.764	3.50	11.11	12.90	24.00
11ax HE80	NSS1-MCS0	9.5	215	7025	5.57	2.08	7.18	5.220	3.50	10.68	11.69	24.00
11ax HE160	NSS1-MCS0	12.5	207	6985	8.74	5.83	10.53	11.310	3.50	14.03	25.32	24.00



For MIMO

Maximum Conducted Output Power (Within 6425-6525MHz band)											
RF Output Power(dBm)											
Setting	Modulation Type	Data Rate	Frequency (MHz)	W/O Duty Factor Measured value of each antenna port (dBm)		W/O duty factor Total power (dBm)	Duty Factor (dB)	With duty factor Total power (dBm)	Antenna Gain (dBi)	With duty factor EIRP (dBm)	EIRP Limit (dBm)
				ANT A	ANT B						
5.5	11ax HE40	NSS1-MCS0	6525	-0.14	-1.82	2.11	0.00	2.11	3.50	5.61	24.00
8	11ax HE80	NSS1-MCS0	6545	-1.56	-4.72	0.15	0.00	0.15	3.50	3.65	24.00
10	11ax HE160	NSS1-MCS0	6505	6.68	3.62	8.42	0.00	8.42	3.50	11.92	24.00

Maximum Conducted Output Power (Extends across 6525MHz band)											
RF Output Power(dBm)											
Setting	Modulation Type	Data Rate	Frequency (MHz)	W/O Duty Factor Measured value of each antenna port (dBm)		W/O duty factor Total power (dBm)	Duty Factor (dB)	With duty factor Total power (dBm)	Antenna Gain (dBi)	With duty factor EIRP (dBm)	EIRP Limit (dBm)
				ANT A	ANT B						
5.5	11ax HE40	NSS1-MCS0	6525	-0.36	-1.69	2.04	0.00	2.04	3.50	5.54	24.00
8	11ax HE80	NSS1-MCS0	6545	4.70	2.20	6.64	0.00	6.64	3.50	10.14	24.00
10	11ax HE160	NSS1-MCS0	6505	2.20	0.34	4.38	0.00	4.38	3.50	7.88	24.00



For MIMO

Maximum Conducted Output Power (Within 6525-6875MHz band) RF Output Power(dBm)											
Setting	Modulation Type	Data Rate	Frequency (MHz)	W/O Duty Factor Measured value of each antenna port (dBm)		W/O duty factor Total power (dBm)	Duty Factor (dB)	With duty factor Total power (dBm)	Antenna Gain (dBi)	With duty factor EIRP (dBm)	EIRP Limit (dBm)
				ANT A	ANT B						
6	11ax HE20	NSS1-MCS0	6875	-3.53	-3.14	-0.32	0.00	-0.32	3.50	3.18	24.00
8	11ax HE40	NSS1-MCS0	6885	-5.59	-5.54	-2.55	0.00	-2.55	3.50	0.95	24.00
11.5	11ax HE80	NSS1-MCS0	6865	2.90	3.10	6.01	0.00	6.01	3.50	9.51	24.00
13	11ax HE160	NSS1-MCS0	6825	5.78	5.51	8.66	0.00	8.66	3.50	12.16	24.00

Maximum Conducted Output Power (Extends across 6875MHz band) RF Output Power(dBm)											
Setting	Modulation Type	Data Rate	Frequency (MHz)	W/O Duty Factor Measured value of each antenna port (dBm)		W/O duty factor Total power (dBm)	Duty Factor (dB)	With duty factor Total power (dBm)	Antenna Gain (dBi)	With duty factor EIRP (dBm)	EIRP Limit (dBm)
				ANT A	ANT B						
6	11ax HE20	NSS1-MCS0	6875	-3.35	-3.31	-0.32	0.00	-0.32	3.50	3.18	24.00
8	11ax HE40	NSS1-MCS0	6885	0.77	0.54	3.67	0.00	3.67	3.50	7.17	24.00
11.5	11ax HE80	NSS1-MCS0	6865	-1.39	-1.58	1.53	0.00	1.53	3.50	5.03	24.00
13	11ax HE160	NSS1-MCS0	6825	-4.39	-4.46	-1.41	0.00	-1.41	3.50	2.09	24.00



Within 6525-6875MHz band

Modulation Type: 802.11a (6Mbps)





SISO ANT A

CH 185

Extends across 6875MHz band

SISO ANT A

CH 185

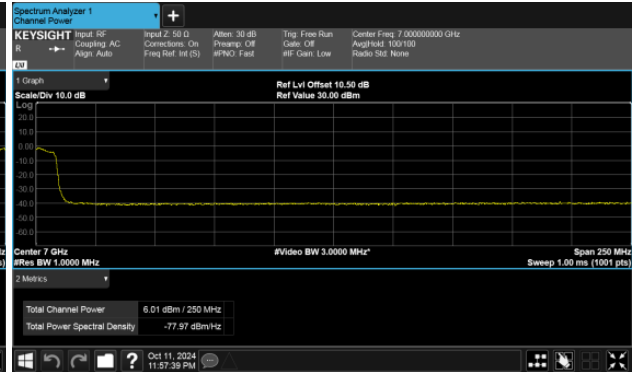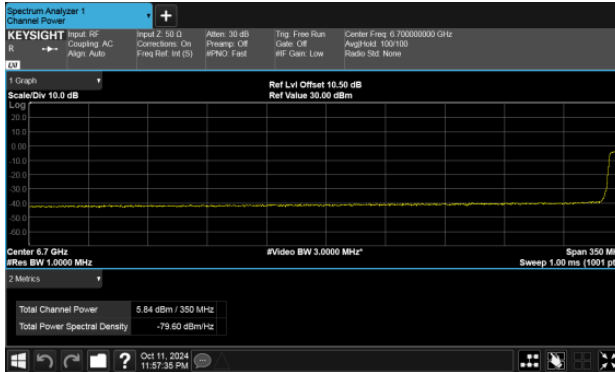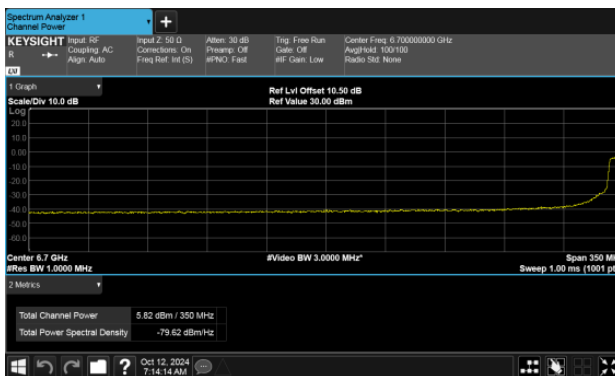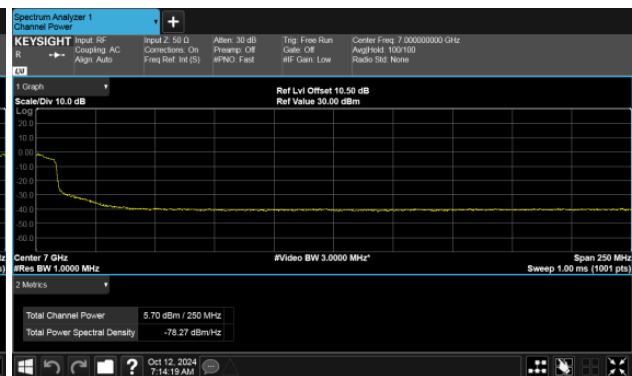SISO ANT B
CH 185SISO ANT B
CH 185




Within 6425-6525MHz band

MIMO


ANT A

Modulation Type: 802.11ax HE40 (14.6Mbps)
CH115

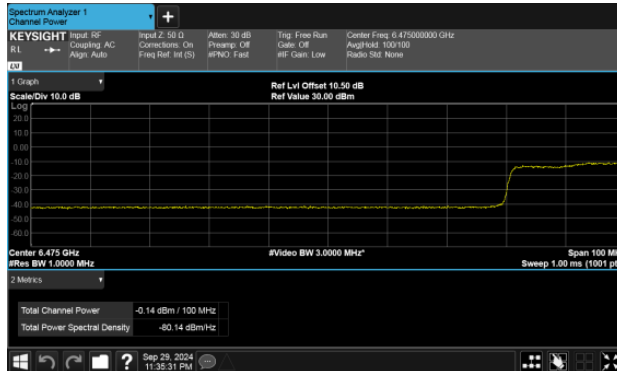


ANT B


Modulation Type: 802.11ax HE40 (14.6Mbps)
CH115

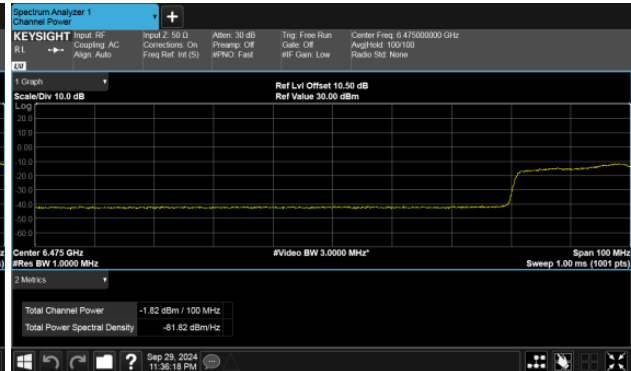


Modulation Type: 802.11ax HE80 (30.6Mbps)
CH119

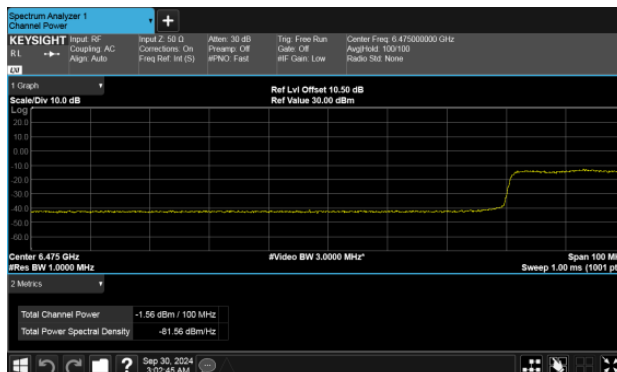


Modulation Type: 802.11ax HE80 (30.6Mbps)
CH119

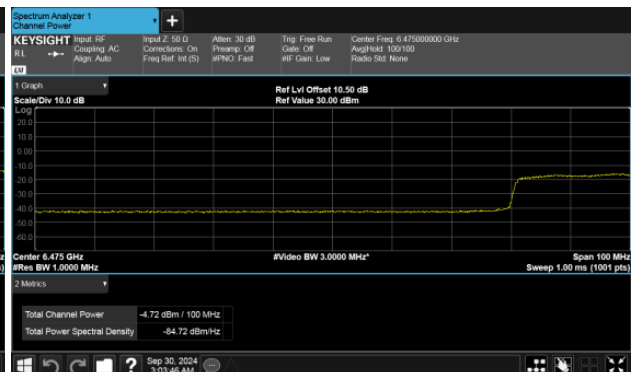

Modulation Type: 802.11ax HE160 (61.3Mbps)
CH111

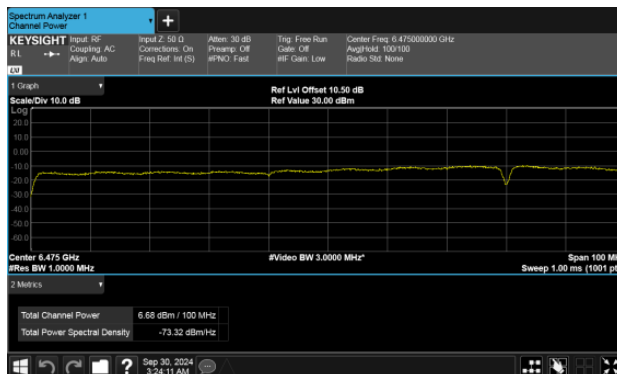

Modulation Type: 802.11ax HE160 (61.3Mbps)
CH111

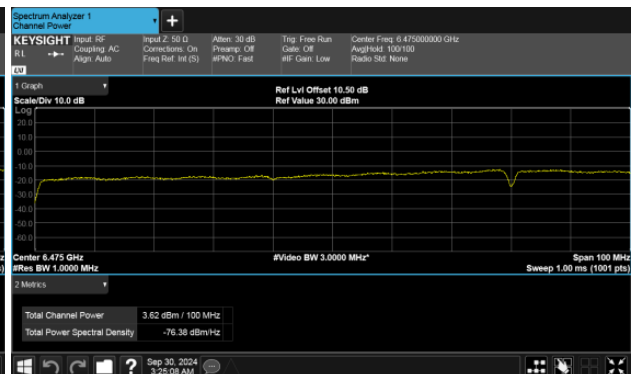




Extends across 6525MHz band

MIMO


ANT A

Modulation Type: 802.11ax HE40 (14.6Mbps)
CH115

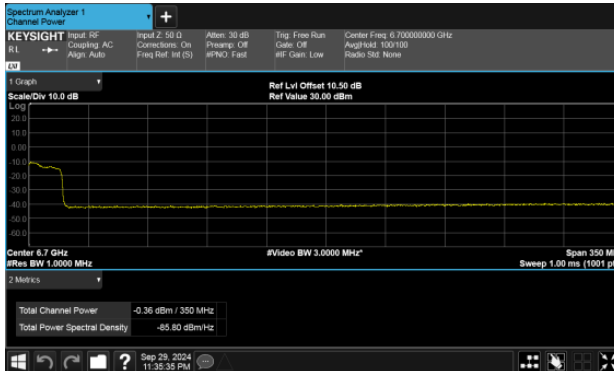


ANT B


Modulation Type: 802.11ax HE40 (14.6Mbps)
CH115

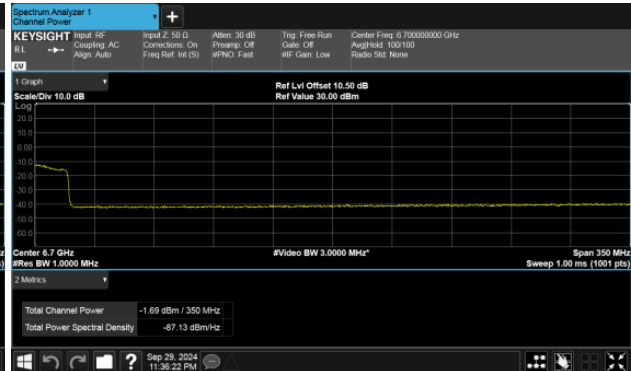


Modulation Type: 802.11ax HE80 (30.6Mbps)
CH119

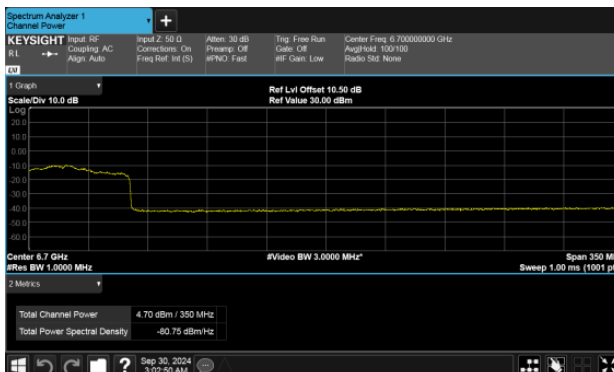


Modulation Type: 802.11ax HE80 (30.6Mbps)
CH119

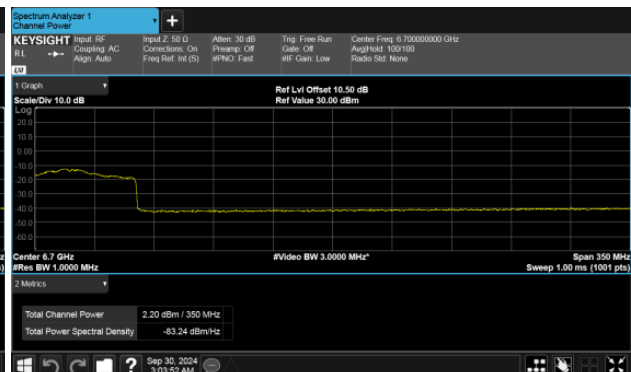

Modulation Type: 802.11ax HE160 (61.3Mbps)
CH111

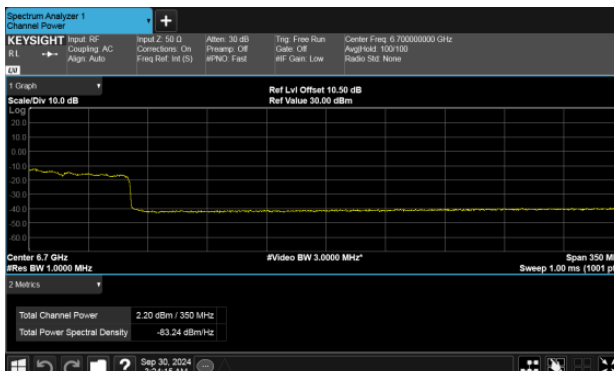

Modulation Type: 802.11ax HE160 (61.3Mbps)
CH111

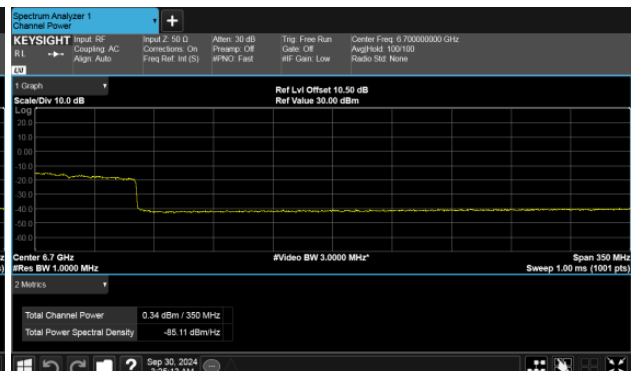





Within 6525-6875MHz band

MIMO


ANT A

Modulation Type: 802.11ax HE20 (7.3Mbps)
CH185


Modulation Type: 802.11ax HE160 (61.3Mbps)
CH175

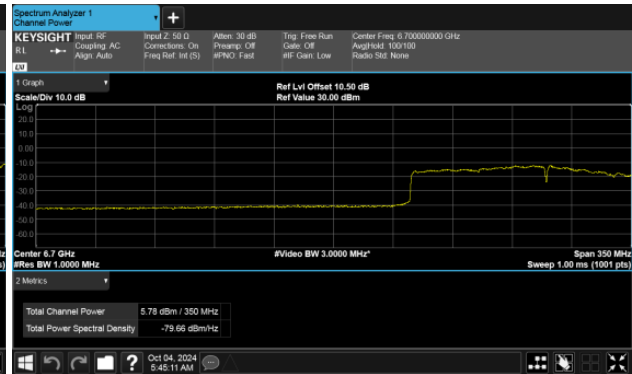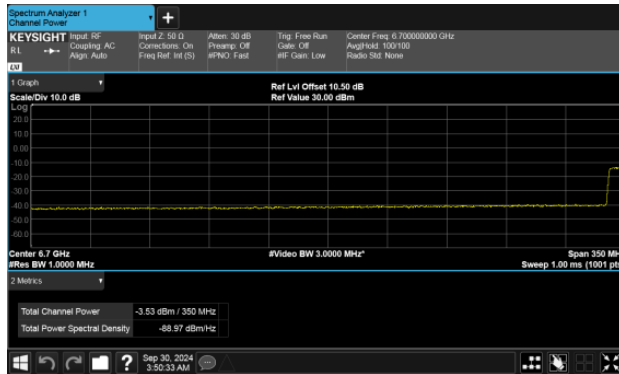

Modulation Type: 802.11ax HE40 (14.6Mbps)
CH187

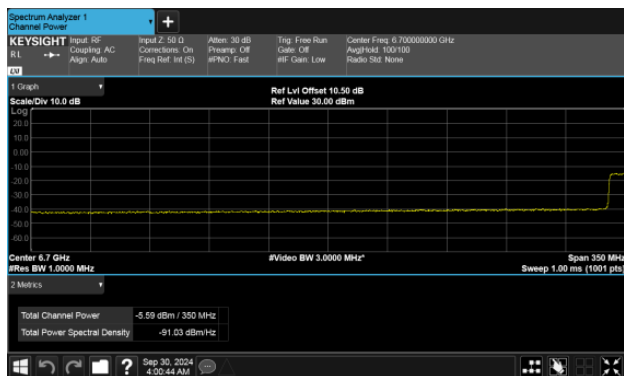

Modulation Type: 802.11ax HE80 (30.6Mbps)
CH183

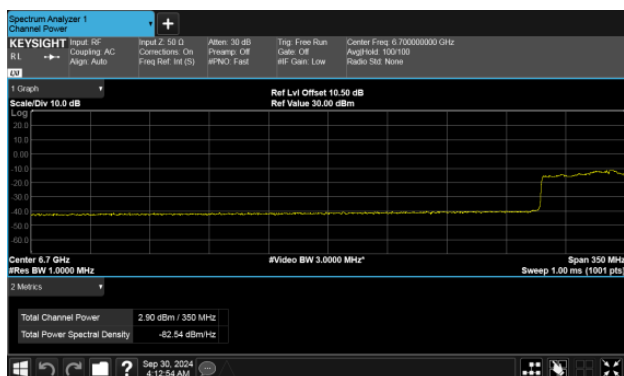





Within 6525-6875MHz band

MIMO


ANT B

Modulation Type: 802.11ax HE20 (7.3Mbps)
CH185


Modulation Type: 802.11ax HE160 (61.3Mbps)
CH175

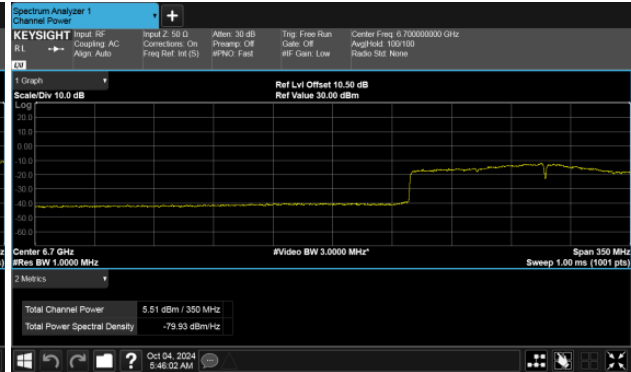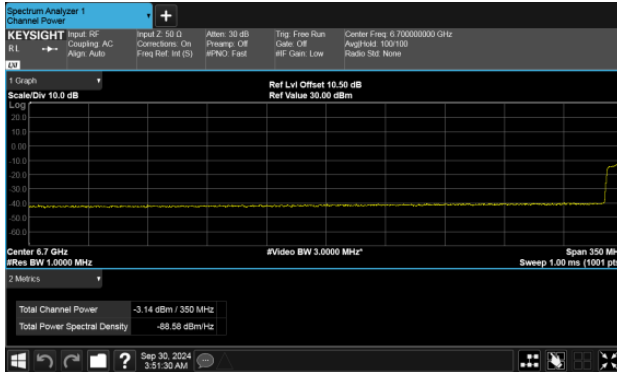

Modulation Type: 802.11ax HE40 (14.6Mbps)
CH187

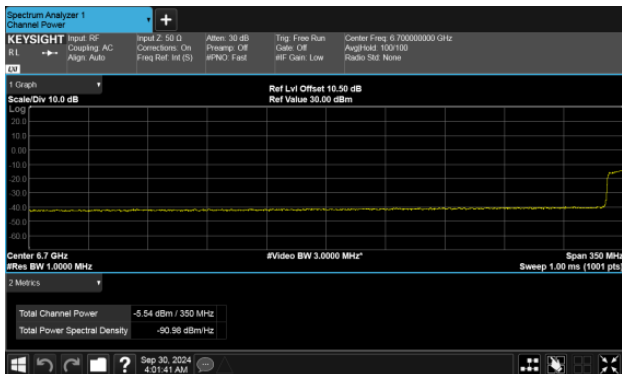

Modulation Type: 802.11ax HE80 (30.6Mbps)
CH183

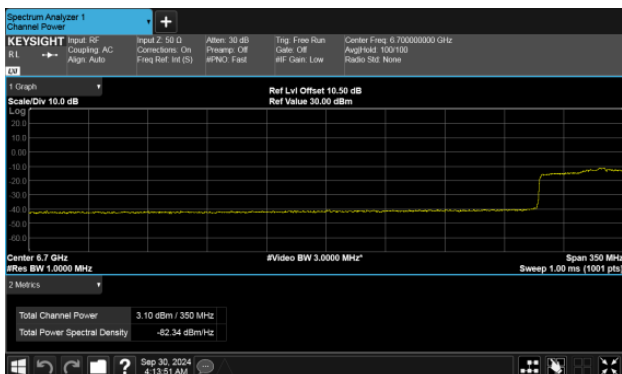




Extends across 6875MHz band


MIMO

ANT A


Modulation Type: 802.11ax HE20 (7.3Mbps)
CH185

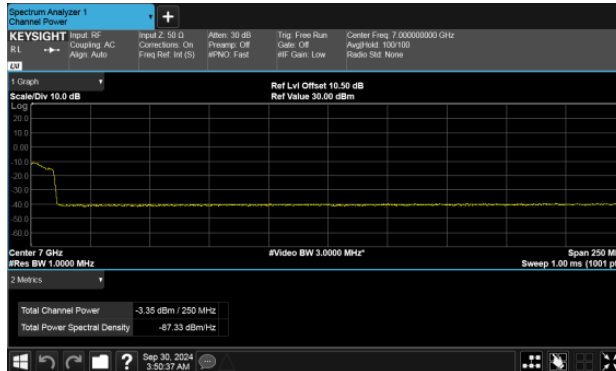

Modulation Type: 802.11ax HE160 (61.3Mbps)
CH175

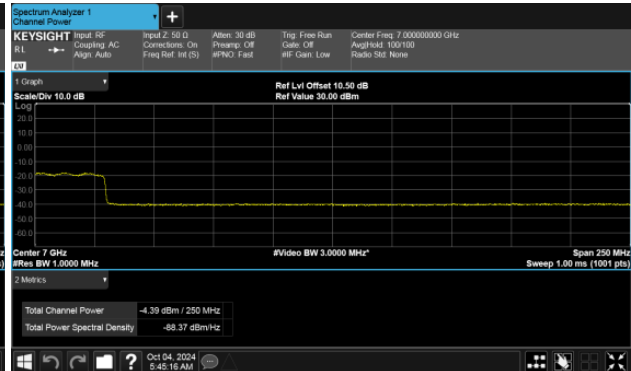

Modulation Type: 802.11ax HE40 (14.6Mbps)
CH187

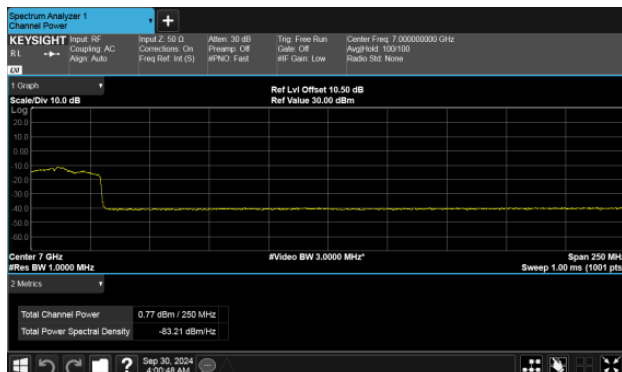

Modulation Type: 802.11ax HE80 (30.6Mbps)
CH183






Extends across 6875MHz band


MIMO

ANT B


Modulation Type: 802.11ax HE20 (7.3Mbps)
CH185

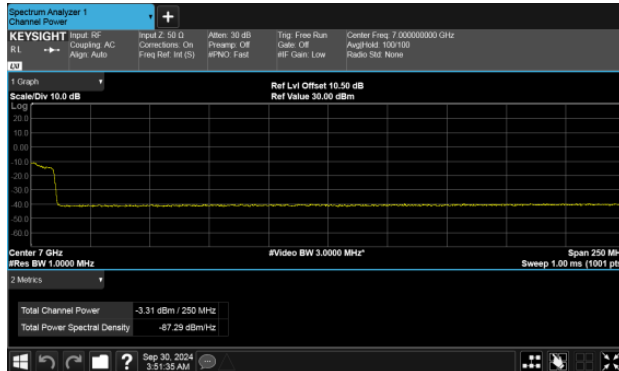

Modulation Type: 802.11ax HE160 (61.3Mbps)
CH175

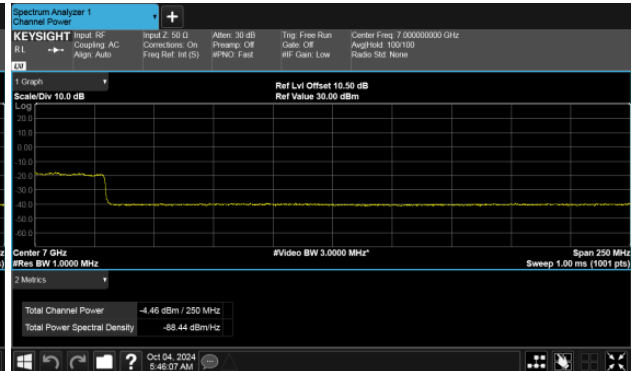

Modulation Type: 802.11ax HE40 (14.6Mbps)
CH187

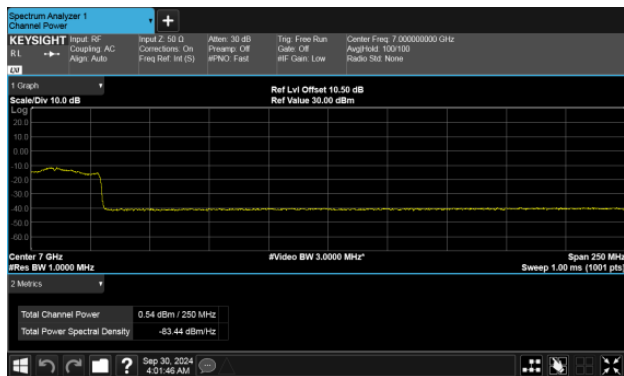

Modulation Type: 802.11ax HE80 (30.6Mbps)
CH183

