



Tested By: Hong, Report No.: 0312507

Scan Settings (1 Range)

Frequencies			Receiver Settings					
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150k	30M	5k	10k	PK+AV	10ms	AUTO	LN OFF	60dB


Final Measurement: x QP / + AV

Meas Time: 1 s

Subranges: 16

Acc Margin: 20dB

Transducer No.	Start	Stop	Name
21	9k	30M	EW0698

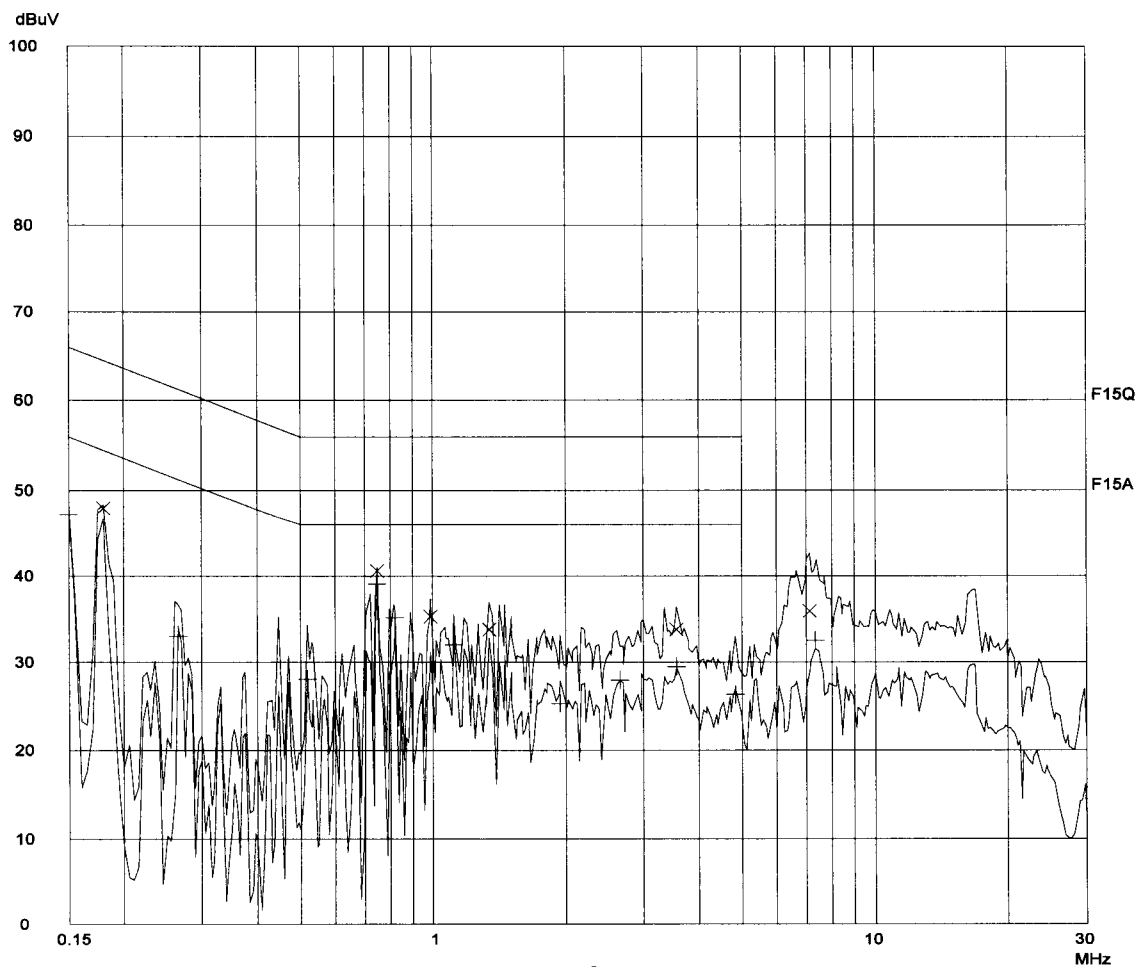



Intertek Testing Services

ETL SEMKO

Report No.: 0312507
download

Tested By: Hong, Report No.: 0312507

Scan Settings (1 Range)

|----- Frequencies -----||----- Receiver Settings -----|
Start Stop Step IF BW Detector M-Time Atten Preamp OpRge
150k 30M 5k 10k PK+AV 10ms AUTO LN OFF 60dB

Final Measurement

Frequency	QP Level	QP Limit
MHz	dBuV	dBuV

0.18000	47.9	64.5
0.74500	40.5	56.0
0.98500	35.3	56.0
1.34000	33.7	56.0
3.57000	33.8	56.0
7.14000	35.9	60.0

Frequency	AV Level	AV Limit
MHz	dBuV	dBuV

0.15000	47.2	56.0
0.26500	33.0	51.3
0.52000	28.1	46.0
0.74500	39.1	46.0
0.82000	35.1	46.0
1.11500	31.9	46.0
1.93500	25.3	46.0
2.64500	27.9	46.0
3.57000	29.4	46.0
4.83500	26.3	46.0
7.32000	32.5	50.0

* limit

Ctrl No.: NA



Tested By: Hong, Report No.: 0312507

Scan Settings (1 Range)

Frequencies			Receiver Settings				
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp OpRge
150k	30M	5k	10k	PK+AV	10ms	AUTO	LN OFF 60dB

Final Measurement: x QP / + AV


Meas Time: 1 s

Subranges: 16

Acc Margin: 20dB

Transducer No. Start Stop Name

21 9k 30M EW0698

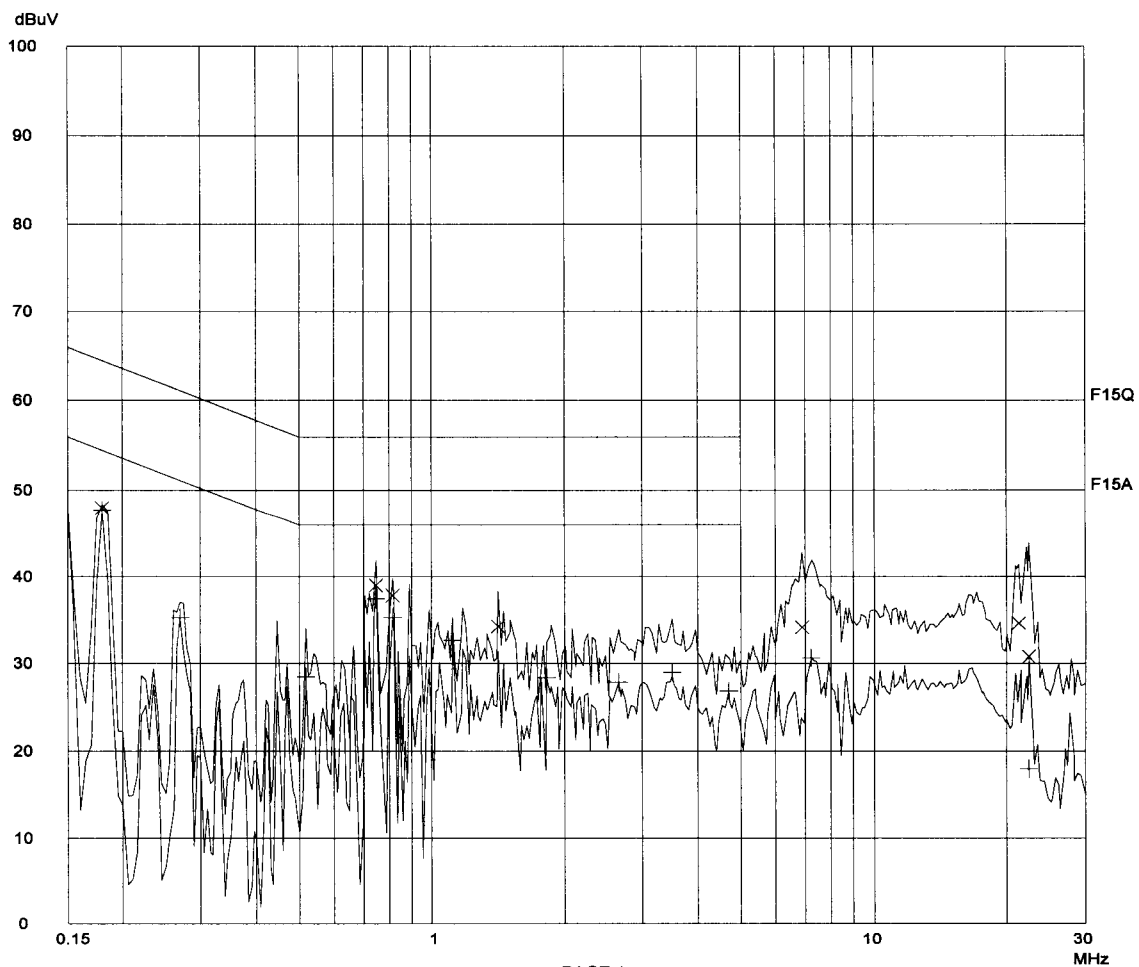



Intertek Testing Services

ETL SEMKO

Report No.: 0312507
PC Cam

Tested By: Hong, Report No.: 0312507

Scan Settings (1 Range)

|----- Frequencies -----||----- Receiver Settings -----|
Start Stop Step IF BW Detector M-Time Atten Preamp OpRge
150k 30M 5k 10k PK+AV 10ms AUTO LN OFF 60dB

Final Measurement

Frequency	QP Level	QP Limit
MHz	dBuV	dBuV

0.18000	47.9	64.5
0.74500	39.0	56.0
0.81500	37.8	56.0
1.41500	34.2	56.0
6.89000	34.1	60.0
21.32500	34.6	60.0
22.43500	30.6	60.0

Frequency	AV Level	AV Limit
MHz	dBuV	dBuV

0.18000	47.6	54.5
0.27000	35.2	51.1
0.52000	28.4	46.0
0.74500	37.4	46.0
0.81500	35.2	46.0
1.11500	32.6	46.0
1.81500	28.3	46.0
2.65500	27.8	46.0
3.49500	29.0	46.0
4.69000	26.8	46.0
7.22500	30.6	50.0
22.43500	17.9	50.0

* limit

Ctrl No.: NA