


RADIO REPORT FCC 47 CFR Part 15C ISED Canada RSS-247 Digital transmission systems operating within the 2400 – 2483.5 MHz band	
Report Reference No	G0M-1807-7540-TFC247WF-V01
Testing Laboratory	Eurofins Product Service GmbH
Address	Storkower Str. 38c 15526 Reichenwalde Germany
Accreditation	 A2LA Accredited Testing Laboratory, Certificate No.: 1983.01 FCC Test Firm Designation Number: DE0008 IC Testing Laboratory site: 3470A-2
Applicant	Leica Geosystems AG
Address	Heinrich Wild Strasse 9435 Heerbrugg SWITZERLAND
Test Specification	According to FCC/ISED rules
Standard	47 CFR Part 15C RSS-247, Issue 2, 2017-02
Non-Standard Test Method	None
Test Scope	partial compliance test
Equipment under Test (EUT):	
Product Description	Bluetooth, WLAN and BLE Modul
Model(s)	TiWi-BLE
Additional Model(s)	None
Brand Name(s)	None
Hardware Version(s)	1.0
Software Version(s)	4.0
FCC-ID	RFD-BTWCO
IC	3177A-BTWCO
Test Result	PASSED

Possible test case verdicts:		
required by standard but not tested	N/T	
not required by standard	N/R	
not applicable to EUT	N/A	
test object does meet the requirement	P(PASS)	
test object does not meet the requirement	F(FAIL)	
Testing:		
Test Lab Temperature	20 - 23 °C	
Test Lab Humidity	32 – 38 %	
Date of receipt of test item	2018-07-11	
Report:		
Compiled by	Sebastian Suckow	
Tested by (+ signature) (Responsible for Test)	Sebastian Suckow	
Approved by (+ signature) (Deputy Head of Lab)	Toralf Jahn	
Date of Issue	2018-08-14	
Total number of pages	86	
General Remarks:		
The test results presented in this report relate only to the object tested. The results contained in this report reflect the results for this particular model and serial number. It is the responsibility of the manufacturer to ensure that all production models meet the intent of the requirements detailed within this report. This report shall not be reproduced, except in full, without the written approval of the Issuing testing laboratory.		
Additional Comments:		

VERSION HISTORY

Version History			
Version	Issue Date	Remarks	Revised By
01	2018-08-14	Initial Release	

ABBREVIATIONS AND ACRONYMS

Acronyms	
Acronym	Description
BPSK	Binary Phase Shift Keying
DSSS	Direct Sequence Spread Spectrum
EUT	Equipment Under Test
FCC	Federal Communications Commission
HT	High Throughput
IEEE 802.11	MAC and PHY Layer for WiFi
ISED	Innovation, Science and Economic Development Canada
OFDM	Orthogonal Frequency Division Multiplexing
QAM	Quadrature Amplitude Modulation
QPSK	Quadrature Phase Shift Keying
RBW	Resolution bandwidth
RMS	Root mean square
VBW	Video bandwidth
V _{NOM}	Nominal supply voltage

REPORT INDEX

1	Equipment (Test Item) Under Test.....	6
1.1	Photos – Equipment Internal	7
1.2	Photos – Test Setup.....	9
1.3	Support Equipment.....	10
1.4	Test Modes	11
1.5	Test Frequencies.....	12
1.6	Sample emission level calculation.....	13
2	Result Summary.....	14
3	Test Conditions and Results.....	15
3.1	Test Conditions and Results - Occupied bandwidth.....	15
3.2	Test Conditions and Results - AC powerline conducted emissions.....	26
3.3	Test Conditions and Results - Transmitter radiated emissions	29
3.4	Test Conditions and Results - Receiver radiated emissions	32
ANNEX A	Transmitter spurious emissions	35
ANNEX B	Receiver spurious emissions	77

1 Equipment (Test Item) Under Test

Description	Bluetooth, WLAN and BLE Modul	
Model	TiWi-BLE	
Additional Model(s)	None	
Brand Name(s)	None	
Serial Number(s)	None	
Hardware Version(s)	1.0	
Software Version(s)	4.0	
PMN	Leica Geosystems AG	
HVIN	TIWI	
FVIN	-/-	
HMN	-/-	
FCC-ID	RFD-BTWCO	
IC	3177A-BTWCO	
Equipment type	Radio Module	
Radio type	Transceiver	
Assigned frequency bands	2400 - 2483.5 MHz	
Radio technology	IEEE 802.11 b/g/n (HT20)	
Modulation	BPSK, QPSK, 16-QAM, 32-QAM	
Number of antenna ports	1	
Radio Module	Type	BT+EDR / BT LE / WLAN 2.4 GHz Module
	Model	TiWi-BLE
	Manufacturer	LS Research
	HW Version	1.0
	SW Version	4.0
Antenna	Type	External
	Model	853405
	Manufacturer	Leica Geosystems
	Gain	2.66 dBi
Supply Voltage	V _{NOM}	7.0 VDC
Operating Temperature	T _{NOM}	25 °C
Manufacturer	Leica Geosystems AG Heinrich Wild Strasse 9435 Heerbrugg SWITZERLAND	

1.3 Support Equipment

Product Type	Device	Manufacturer	Model	Comment
CBL	USB Kabel	Leica	764700	USB Kabel
Description:				
AE	Auxiliary Equipment			
SIM	Simulator			
CBL	Connecting Cable			
Comment:				

1.4 Test Modes

Mode	Description
HT20 (IEEE 802.11n)	Mode = Transmit Modulation = BPSK Spreading = OFDM Bandwidth = 20 MHz Duty cycle = 100% Power setting (1 Simultaneous Tx) = 30 MCS (1 Simultaneous Tx) = 0
Receive	Mode = Receive
Comment: The above settings were found as worst case during pre-tests.	

1.5 Test Frequencies

Designator	Mode	Channel	Frequency [MHz]
F1	Tx / Rx	1	2412
F2	Tx / Rx	6	2437
F3	Tx / Rx	11	2462

1.6 Sample emission level calculation

The following is a description of terms and a sample calculation, as appears in the radiated emissions data table. The numbers used in the calculation are for example only. There is no direct correlation to the specific data taken for the product described in this document:

Reading:

This is the reading obtained on the spectrum analyzer in dBμV. Any external preamplifiers used are taken into account through internal analyzer settings.

A.F.:

This is the antenna factor for the receiving antenna. It is a conversion factor, which converts electric fields strengths to voltages, which can be measured directly on the spectrum analyzer. It is treated as a loss in dB. Cable losses have been included with the A.F. to simplify the calculations. The antenna factor is used in calculations as follows:

$$\text{Reading on Analyzer (dB}\mu\text{V)} + \text{A.F. (dB)} = \text{Net field strength (dB}\mu\text{V/m)}$$

Net:

This is the net field strength measurement (as shown above).

Limit:

This is the FCC Class B radiated emission limit (in units of dBμV/m). The FCC limits are given in units of μV/m. The following formula is used to convert the units of μV/m to dBμV/m:

$$\text{Limit (dB}\mu\text{V/m)} = 20 \cdot \log(\mu\text{V/m})$$

Margin:

This is the margin of compliance below the FCC limit. The units are given in dB. A negative margin indicates the emission was below the limit. A positive margin indicates that the emission exceeds the limit.

Example only:

Reading + AF	= Net Reading	:	Net reading	- FCC limit	= Margin
+21.5 dBμV	+ 26 dB = 47.5 dBμV/m	:	47.5 dBμV/m	- 57.0 dBμV/m	= -9.5 dB

2 Result Summary

FCC 47 CFR Part 15C, ISED RSS-247				
Product Standard Reference	Requirement	Reference Method	Result	Remarks
RSS-Gen 6.6 Issue 4	Occupied Bandwidth	ANSI C63.10-2013	N/R	Informational only
FCC § 15.247(a)(2) ISED RSS-247 § 5.2 Issue 2	6 dB Bandwidth	ANSI C63.10-2013	N/T	
FCC § 15.247(b)(3) ISED RSS-247 § 5.4 Issue 2	Maximum peak conducted power	ANSI C63.10-2013	N/T	
FCC § 15.247(e) ISED RSS-247 § 5.2 Issue 2	Power spectral density	ANSI C63.10-2013	N/T	
FCC § 15.207 ISED RSS-247 § 3.1 Issue 2	AC power line conducted emissions	ANSI C63.10-2013	PASS	
FCC § 15.247(d) ISED RSS-247 § 5.5 Issue 2	Band edge compliance	ANSI C63.10-2013	N/T	
FCC § 15.247(d) ISED RSS-247 § 5.5 Issue 2	Conducted spurious emissions	ANSI C63.10-2013	N/T	
FCC § 15.247(d) FCC § 15.209 ISED RSS-GEN § 8.9 Issue 4	Transmitter radiated spurious emissions	ANSI C63.10-2013	PASS	
ISED RSS-247 § 3.1 Issue 2	Receiver radiated spurious emissions	ANSI C63.10-2013	PASS	
Comment:				

Possible Test Case Verdicts	
PASS	Test object does meet the requirements
FAIL	Test object does not meet the requirements
N/T	Required by standard but not tested
N/R	Not required by standard for the test object

3 Test Conditions and Results

3.1 Test Conditions and Results - Occupied bandwidth


3.1.1 Information

Test Information	
Reference	ISED RSS-Gen 6.6
Measurement Method	ANSI C63.10 6.9.3
Operator	Sebastian Suckow
Date	2018-07-20

3.1.2 Limits

Limits
None (Informational only)

3.1.3 Setup

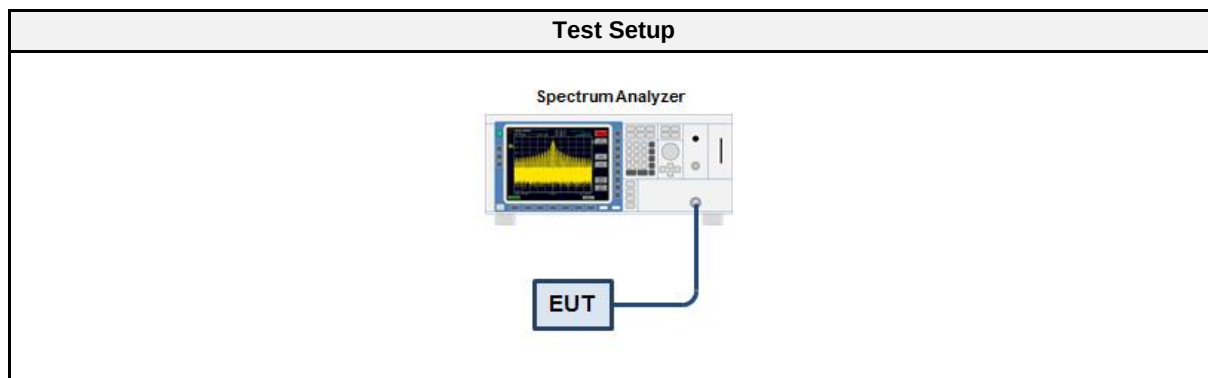

3.1.4 Equipment

Test Equipment					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Spectrum Analyzer	R&S	FSU 26	EF01003	2017-07	2018-07

3.1.5 Procedure


Test Procedure
1. EUT transmitter is activated in test mode under normal conditions 2. The spectrum analyzer is set to peak detection and maximum hold with a span twice the emission spectrum 3. The resolution bandwidth is set to 1 % of the bandwidth 4. The occupied bandwidth is measured with the build-in analyzer function

3.1.6 Results

Test Results		
Mode	Frequency [MHz]	Bandwidth [MHz]
DSSS	2412	13.680
DSSS	2437	13.740
DSSS	2462	13.800
OFDM	2412	16.440
OFDM	2437	16.440
OFDM	2462	16.440
HT20	2412	17.640
HT20	2437	17.580
HT20	2462	17.640

Occupied Bandwidth


Project Number: G0M-1807-7540
 Applicant: Leica Geosystems AG
 Model Description: TiWi BT/WLAN Evaluation Board
 Model: TiWi BT/WLAN Evaluation Board
 Test Sample ID: 19294
 Reference Method: ANSI C63.10:2013, Section 6.9.3
 Operational Mode: IEEE 802.11 b, Channel: 1, 2412
 Operating Conditions: Tnom/Vnom
 Operator: S. Suckow
 Test Site: Eurofins Product Service GmbH
 Test Date: 2018-07-20
 Occupied Bandwidth [MHz]: 13.680

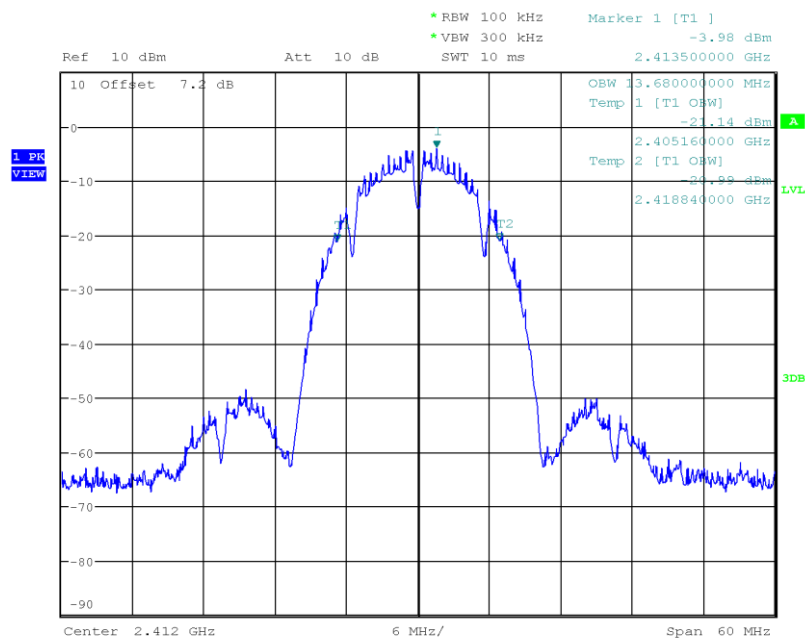

Date: 20.JUL.2018 13:17:18

Occupied Bandwidth


Project Number: G0M-1807-7540
 Applicant: Leica Geosystems AG
 Model Description: TiWi BT/WLAN Evaluation Board
 Model: TiWi BT/WLAN Evaluation Board
 Test Sample ID: 19294
 Reference Method: ANSI C63.10:2013, Section 6.9.3
 Operational Mode: IEEE 802.11 b, Channel: 6, 2437
 Operating Conditions: Tnom/Vnom
 Operator: S. Suckow
 Test Site: Eurofins Product Service GmbH
 Test Date: 2018-07-20
 Occupied Bandwidth [MHz]: 13.740

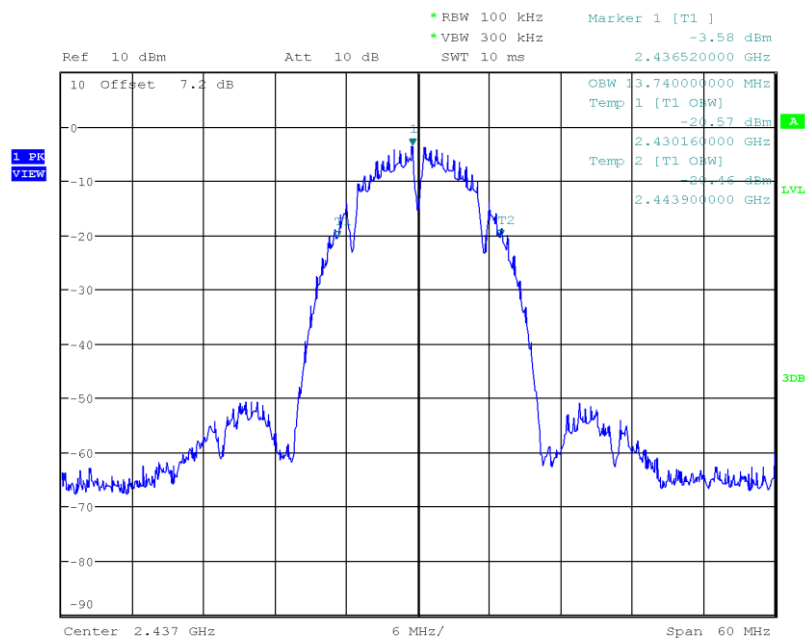

Date: 20.JUL.2018 13:17:56

Occupied Bandwidth


Project Number:	G0M-1807-7540
Applicant:	Leica Geosystems AG
Model Description:	TiWi BT/WLAN Evaluation Board
Model:	TiWi BT/WLAN Evaluation Board
Test Sample ID:	19294
Reference Method:	ANSI C63.10:2013, Section 6.9.3
Operational Mode:	IEEE 802.11 b, Channel: 11, 2462
Operating Conditions:	Tnom/Vnom
Operator:	S. Suckow
Test Site:	Eurofins Product Service GmbH
Test Date:	2018-07-20
Occupied Bandwidth [MHz]:	13.800

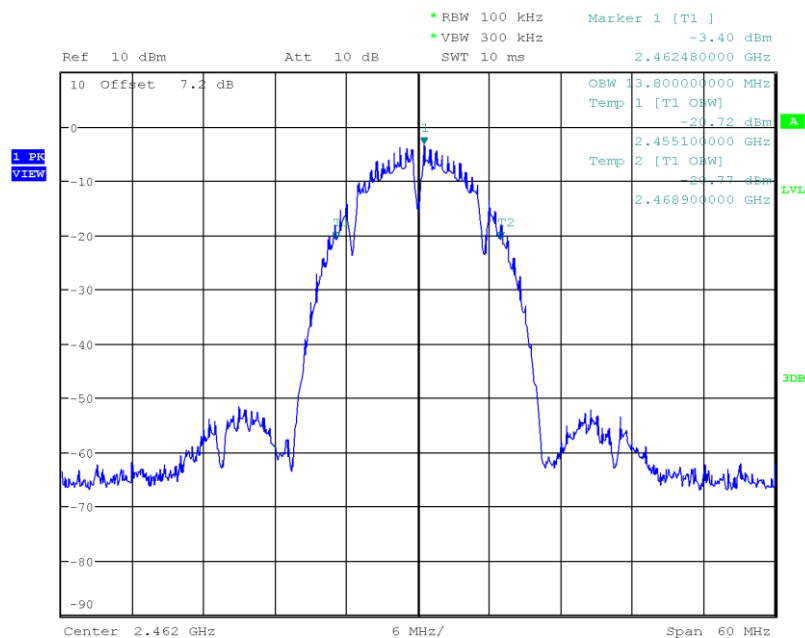

Date: 20.JUL.2018 13:18:39

Occupied Bandwidth


Project Number: G0M-1807-7540
 Applicant: Leica Geosystems AG
 Model Description: TiWi BT/WLAN Evaluation Board
 Model: TiWi BT/WLAN Evaluation Board
 Test Sample ID: 19294
 Reference Method: ANSI C63.10:2013, Section 6.9.3
 Operational Mode: IEEE 802.11 g, Channel: 1, 2412
 Operating Conditions: Tnom/Vnom
 Operator: S. Suckow
 Test Site: Eurofins Product Service GmbH
 Test Date: 2018-07-20
 Occupied Bandwidth [MHz]: 16.440

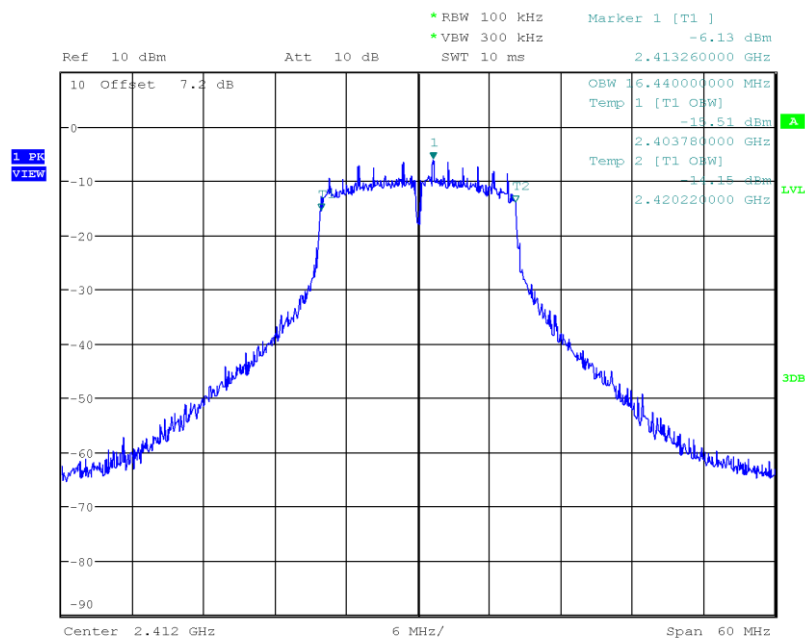

Date: 20.JUL.2018 13:19:35

Occupied Bandwidth


Project Number: G0M-1807-7540
 Applicant: Leica Geosystems AG
 Model Description: TiWi BT/WLAN Evaluation Board
 Model: TiWi BT/WLAN Evaluation Board
 Test Sample ID: 19294
 Reference Method: ANSI C63.10:2013, Section 6.9.3
 Operational Mode: IEEE 802.11 g, Channel: 6, 2437
 Operating Conditions: Tnom/Vnom
 Operator: S. Suckow
 Test Site: Eurofins Product Service GmbH
 Test Date: 2018-07-20
 Occupied Bandwidth [MHz]: 16.440

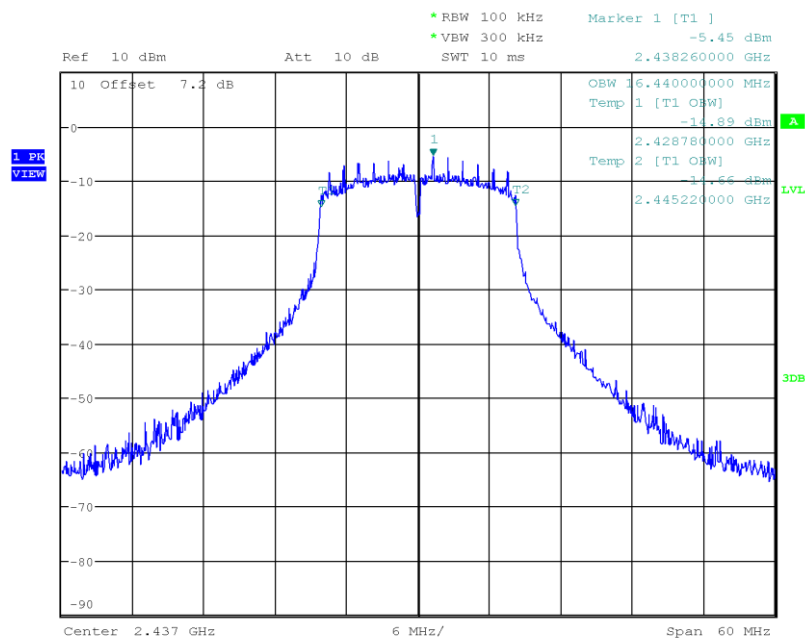

Date: 20.JUL.2018 13:20:18

Occupied Bandwidth


Project Number: G0M-1807-7540
 Applicant: Leica Geosystems AG
 Model Description: TiWi BT/WLAN Evaluation Board
 Model: TiWi BT/WLAN Evaluation Board
 Test Sample ID: 19294
 Reference Method: ANSI C63.10:2013, Section 6.9.3
 Operational Mode: IEEE 802.11 g, Channel: 11, 2462
 Operating Conditions: Tnom/Vnom
 Operator: S. Suckow
 Test Site: Eurofins Product Service GmbH
 Test Date: 2018-07-20
 Occupied Bandwidth [MHz]: 16.440

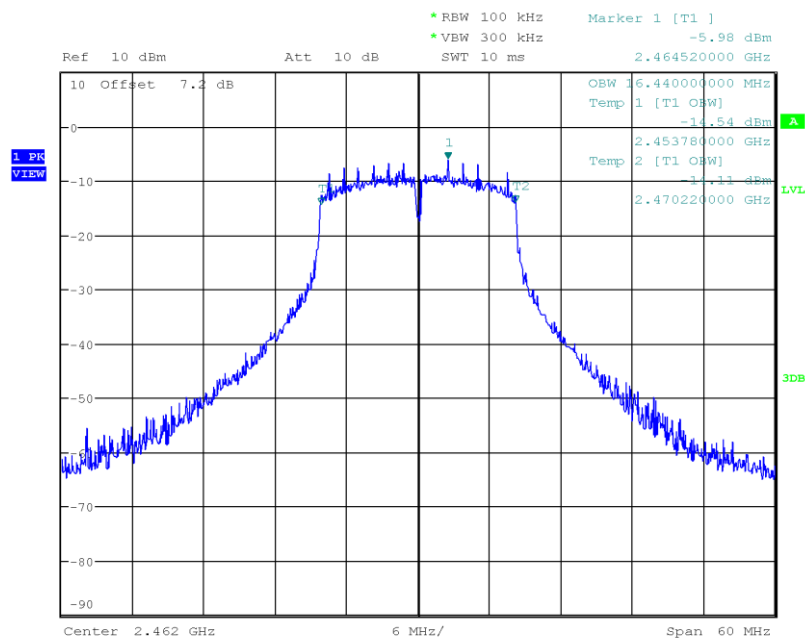

Date: 20.JUL.2018 13:20:58

Occupied Bandwidth


Project Number: G0M-1807-7540
 Applicant: Leica Geosystems AG
 Model Description: TiWi BT/WLAN Evaluation Board
 Model: TiWi BT/WLAN Evaluation Board
 Test Sample ID: 19294
 Reference Method: ANSI C63.10:2013, Section 6.9.3
 Operational Mode: IEEE 802.11 n HT20, Channel: 1, 2412
 Operating Conditions: Tnom/Vnom
 Operator: S. Suckow
 Test Site: Eurofins Product Service GmbH
 Test Date: 2018-07-20
 Occupied Bandwidth [MHz]: 17.640

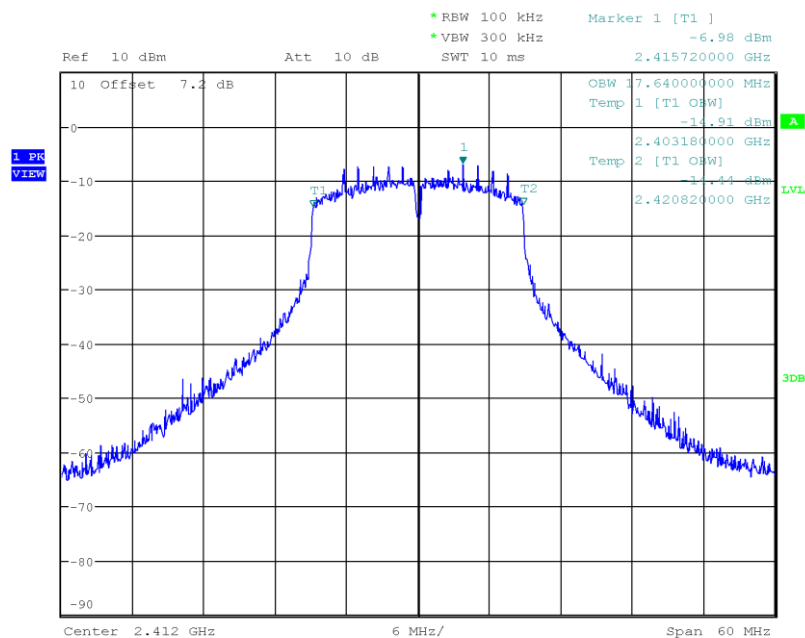

Date: 20.JUL.2018 13:21:55

Occupied Bandwidth


Project Number: G0M-1807-7540
 Applicant: Leica Geosystems AG
 Model Description: TiWi BT/WLAN Evaluation Board
 Model: TiWi BT/WLAN Evaluation Board
 Test Sample ID: 19294
 Reference Method: ANSI C63.10:2013, Section 6.9.3
 Operational Mode: IEEE 802.11 n HT20, Channel: 6, 2437
 Operating Conditions: Tnom/Vnom
 Operator: S. Suckow
 Test Site: Eurofins Product Service GmbH
 Test Date: 2018-07-20
 Occupied Bandwidth [MHz]: 17.580

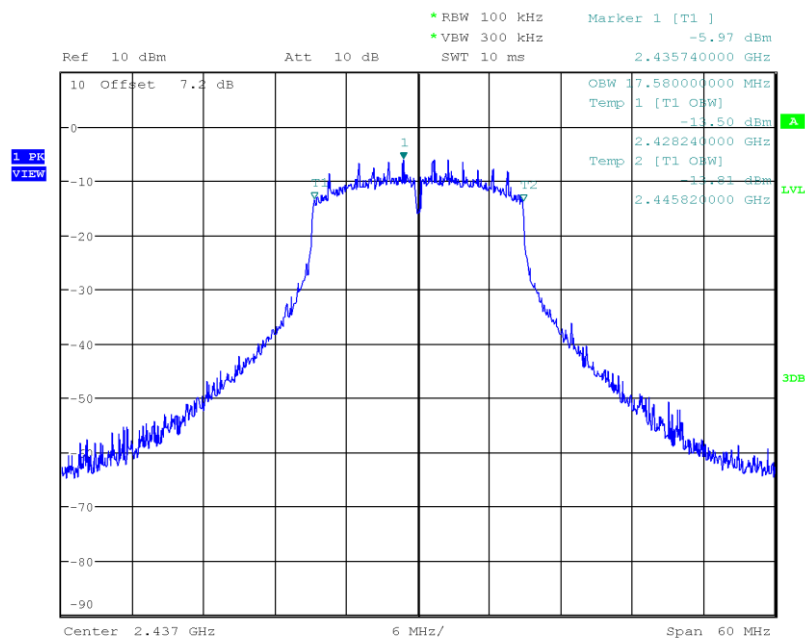

Date: 20.JUL.2018 13:22:52

Occupied Bandwidth

Project Number: G0M-1807-7540
 Applicant: Leica Geosystems AG
 Model Description: TiWi BT/WLAN Evaluation Board
 Model: TiWi BT/WLAN Evaluation Board
 Test Sample ID: 19294
 Reference Method: ANSI C63.10:2013, Section 6.9.3
 Operational Mode: IEEE 802.11 n HT20, Channel: 11, 2462
 Operating Conditions: Tnom/Vnom
 Operator: S. Suckow
 Test Site: Eurofins Product Service GmbH
 Test Date: 2018-07-20
 Occupied Bandwidth [MHz]: 17.640

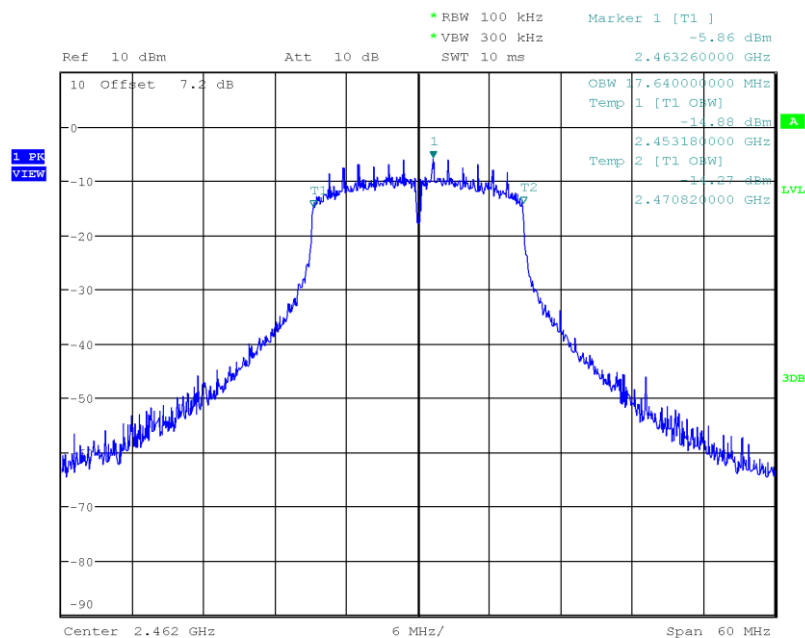

Date: 20.JUL.2018 13:23:39

3.2 Test Conditions and Results - AC powerline conducted emissions

3.2.1 Information


Test Information	
Reference	FCC 15.207
Measurement Method	ANSI C63.10 6.2
Operator	Sebastian Suckow
Date	2018-07-19

3.2.2 Limits

Limits		
Frequency [MHz]	Quasi-Peak [dBμV]	Average [dBμV]
0.15 - 0.5	66 - 56*	56 - 46*
0.5 - 5	56	46
5 - 30	60	50

* Limit decreases linearly with the logarithm of the frequency

3.2.3 Setup

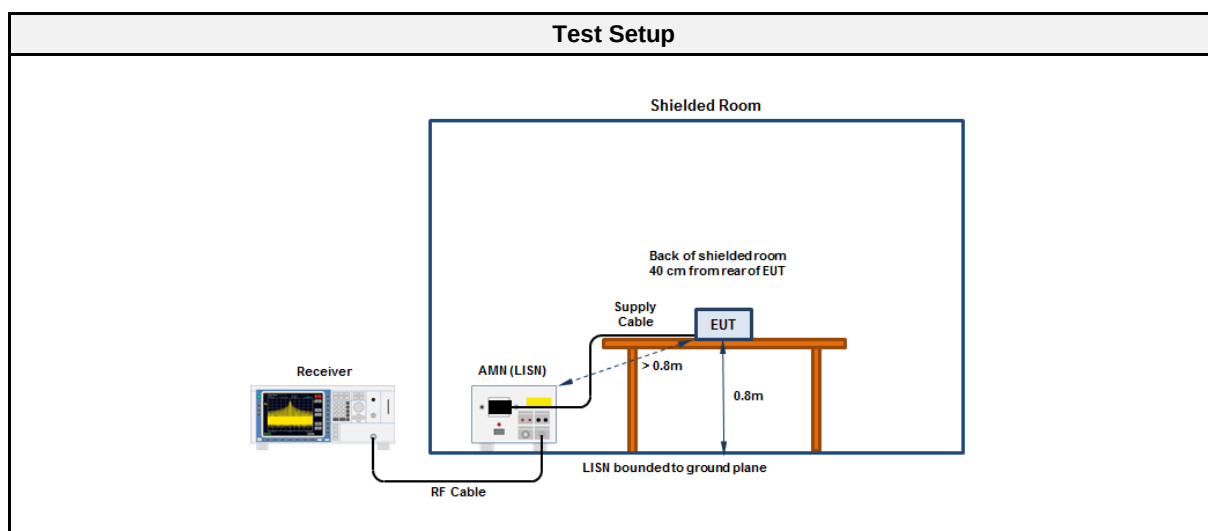

3.2.4 Equipment

Test Equipment					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
EMI Receiver	R&S	ESU 26	EF00241	2017-07	2019-07
LISN	R&S	ESH2-Z5	EF00182	2017-01	2019-01


EMI voltage test in the ac-mains according to FCC part 15B

Project number: G0M-1807-7540

Applicant: Leica Geosystems AG
 EUT Name: TiWi BT/WLAN Evaluation Board
 Model: TiWi BT/WLAN Evaluation Board
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Suckow
 Test Conditions: Tnom: 24°C, Unom: 7.0 VDC
 LISN: ESH2-Z5 L
 Mode: IEEE 802.11n HT20 WLAN MCS0 2437 MHz
 Test Date: 2018-07-19
 Note: Plus

Index 2

RadiMation

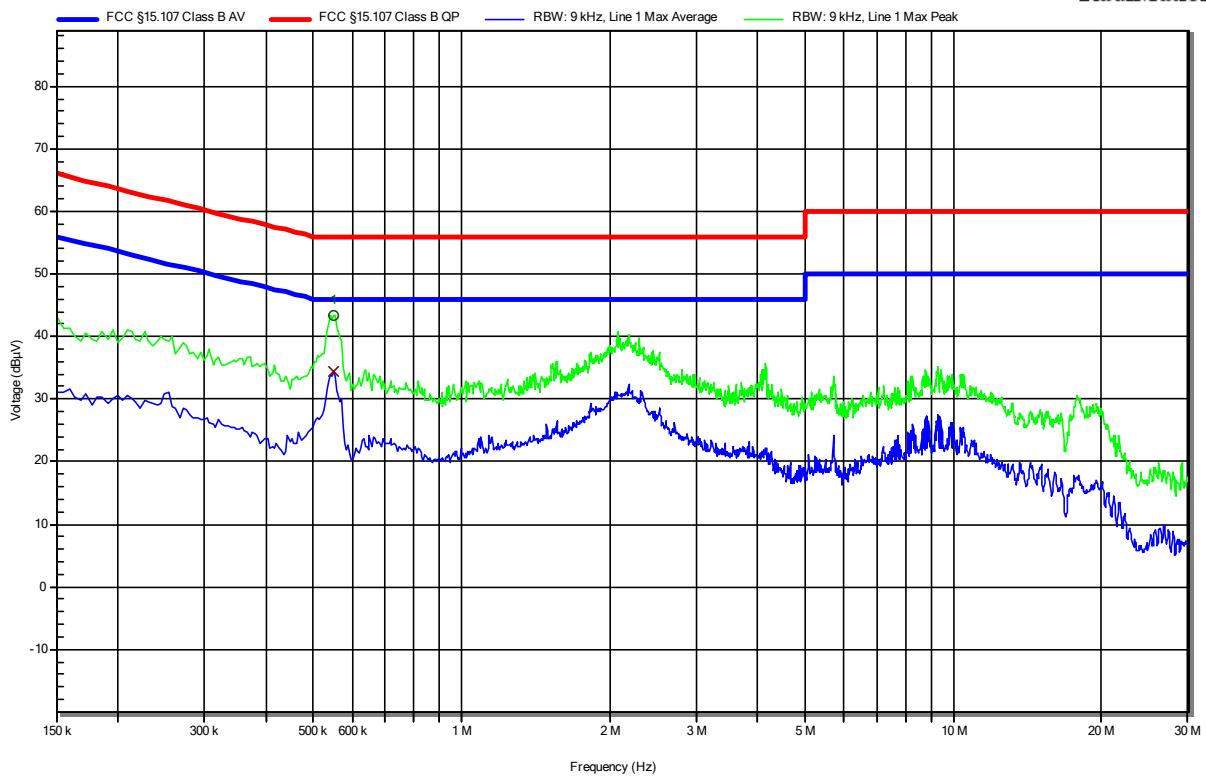

Peak Number
1

Frequency
550.5 kHz

Peak Number	Frequency	Average	Average Limit	Average Difference	Average Status
1	550.5 kHz	34.44 dBµV	46 dBµV	-11.56 dB	Pass


EMI voltage test in the ac-mains according to FCC part 15B

Project number: G0M-1807-7540

Applicant: Leica Geosystems AG
 EUT Name: TiWi BT/WLAN Evaluation Board
 Model: TiWi BT/WLAN Evaluation Board
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Suckow
 Test Conditions: Tnom: 24°C, Unom: 7.0 VDC
 LISN: ESH2-Z5 N
 Mode: IEEE 802.11n HT20 WLAN MCS0 2437 MHz
 Test Date: 2018-07-19
 Note: Minus

Index 1

RadiMation

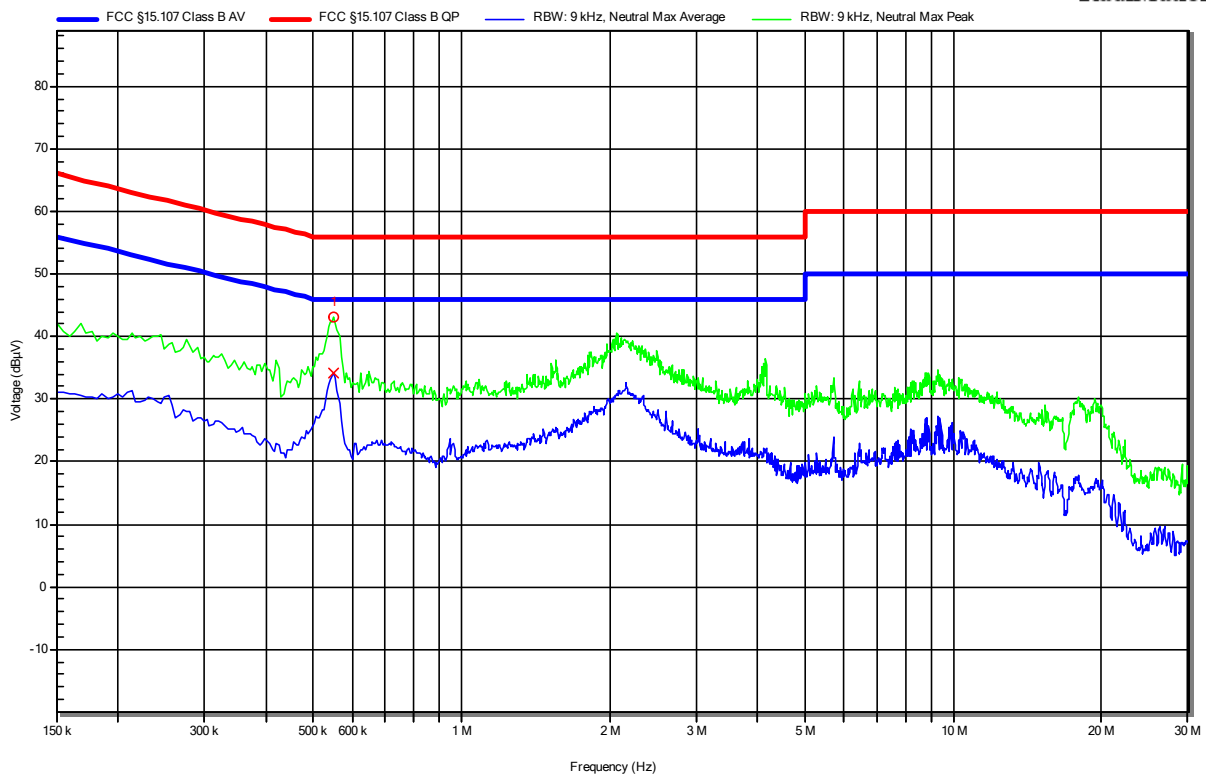

Peak Number
1

Frequency
550.5 kHz

Peak Number	Frequency	Average	Average Limit	Average Difference	Average Status
1	550.5 kHz	34.25 dBµV	46 dBµV	-11.75 dB	Pass

3.3 Test Conditions and Results - Transmitter radiated emissions


3.3.1 Information


Test Information	
Reference	FCC 15.247(d) / ISSED RSS-GEN 8.9
Measurement Method	ANSI C63.10 6.4, 6.5, 6.6, 11.12
Operator	Sebastian Suckow
Date	2018-07-18 – 2018-07-20

3.3.2 Limits

Limits			
Frequency [MHz]	Detector	Field strength [$\mu\text{V/m}$]	Measurement distance [m]
0.009 - 0.09	Average	2400/F[kHz]	300
0.09 - 0.110	Quasi-Peak	2400/F[kHz]	300
0.110 - 0.490	Average	2400/F[kHz]	300
0.490 - 1.705	Quasi-Peak	24000/F[kHz]	30
1.705 - 30.0	Quasi-Peak	30	30
30 - 88	Quasi-Peak	100	3
88 - 216	Quasi-Peak	150	3
216 - 960	Quasi-Peak	200	3
960 - 1000	Quasi-Peak	500	3
>1000	Average	500	3

3.3.3 Setup

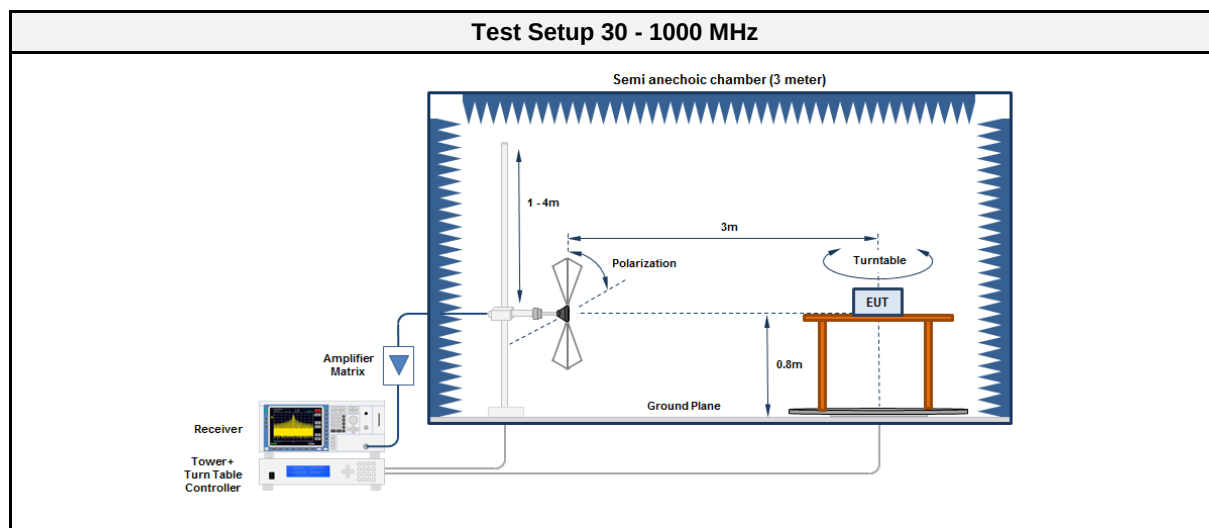

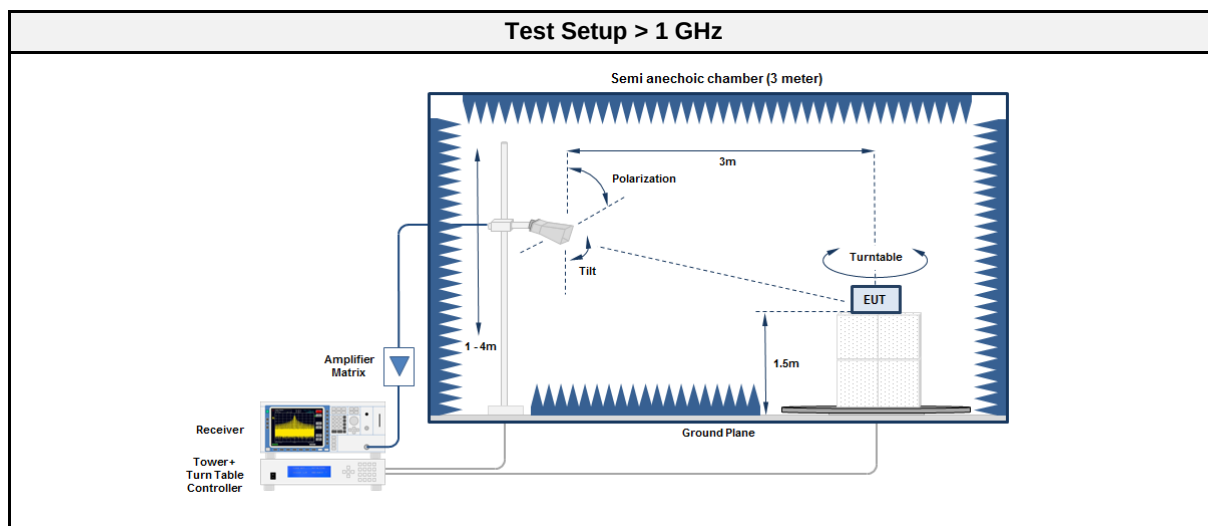

3.3.4 Equipment

Test Equipment 30 - 1000 MHz					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Anechoic Chamber	Frankonia	AC1	EF00062	-	-
Measurement Receiver	Agilent	N9038A-526/WXP	EF01070	2017-08	2018-08
Antenna	R&S	HK 116	EF00203	2018-06	2020-06
Antenna	R&S	HL 223	EF00212	2016-04	2019-04

Test Equipment > 1 GHz					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Anechoic Chamber	Frankonia	AC1	EF00062	-	-
Measurement Receiver	Agilent	N9038A-526/WXP	EF01070	2017-08	2018-08
Antenna	R&S	BBHA 9120D	EF01153	2017-08	2018-08
Antenna	Amplifier Research	AT4560	EF01152	2017-10	2018-10

3.3.5 Procedure

Test Procedure 30 - 1000 MHz
1. EUT is placed on a non conducting support at the center of a turn table 0.8 m above the ground 2. EUT set to test mode 3. The receiver is set to peak detection with max hold 4. The EUT is rotated through 360° and the height of the antenna is varied from 1 m to 4 m 5. All significant emissions are measured again using the corresponding final detector

Test Procedure > 1 GHz
1. EUT is placed on a non conducting support at the center of a turn table 1.5 m above the ground 2. EUT set to test mode 3. The receiver is set to peak detection with max hold 4. The EUT is rotated through 360° and the height of the antenna is varied from 1 m to 4 m 5. All significant emissions are measured again using the corresponding final detector

3.3.6 Results

Test Results - HT20						
Channel [MHz]	Emission [MHz]	Level [dBμV/m]	Det.	Pol.	Limit [dBμV/m]	Margin [dB]
2412	109.685	38.10	pk	hor	43.50	-05.45
2412	2399.9	78.69	pk	hor	95.00	-16.31
2412	2399.9	67.79	pk	ver	95.00	-27.21
2412	2490.8	53.17	pk	hor	74.00	-20.83
2412	2499.8	51.47	pk	ver	74.00	-22.53
2412	4827	60.09	pk	hor	74.00	-13.91
2437	108.905	37.80	pk	hor	43.50	-05.68
2437	4873	53.23	pk	hor	74.00	-20.77
2462	110.7059	37.80	pk	hor	43.50	-05.69
2462	2483.7	58.35	pk	hor	74.00	-15.65
2462	4923	45.31	pk	hor	74.00	-28.69

3.4 Test Conditions and Results - Receiver radiated emissions


3.4.1 Information


Test Information	
Reference	ISED RSS-247 3.1
Measurement Method	ANSI C63.10 6.5, 6.6, 11.12
Operator	Sebastian Suckow
Date	2018-07-18 – 2018-07-20

3.4.2 Limits

Limits			
Frequency [MHz]	Detector	Field strength [dB μ V/m]	Measurement distance [m]
30 - 88	Quasi-Peak	100	3
88 - 216	Quasi-Peak	150	3
216 - 960	Quasi-Peak	200	3
960 - 1000	Quasi-Peak	500	3
>1000	Average	500	3

3.4.3 Setup

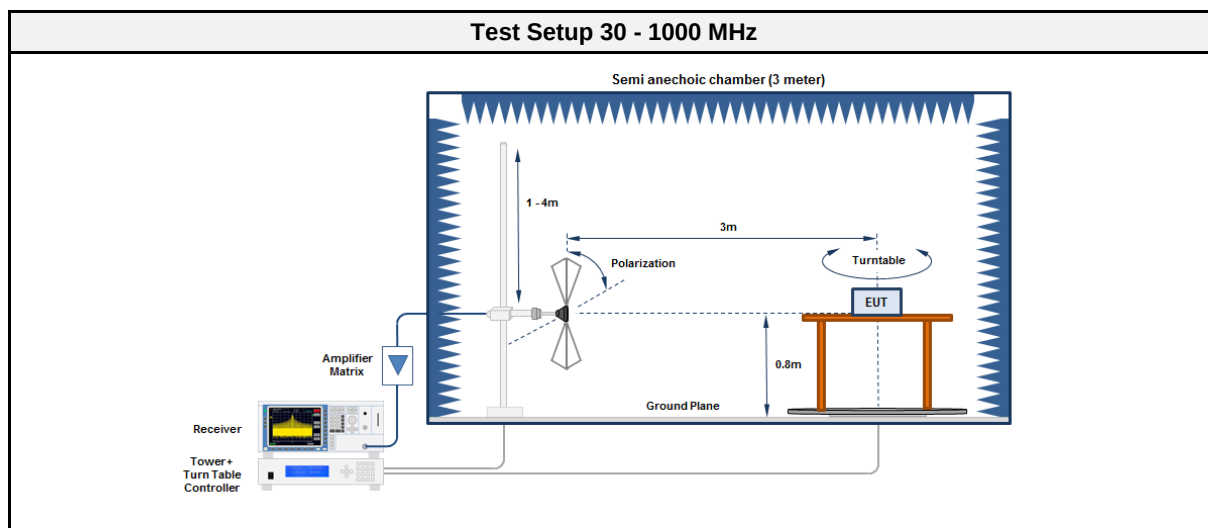

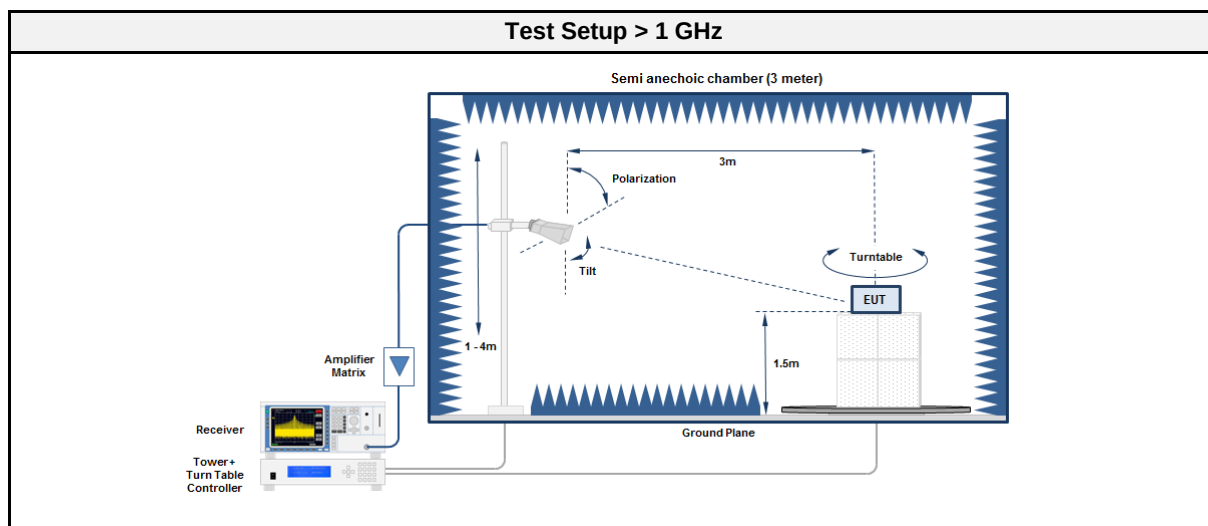

3.4.4 Equipment

Test Equipment 30 - 1000 MHz					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Anechoic Chamber	Frankonia	AC1	EF00062	-	-
Measurement Receiver	Agilent	N9038A-526/WXP	EF01070	2017-08	2018-08
Antenna	R&S	HK 116	EF00203	2018-06	2020-06
Antenna	R&S	HL 223	EF00212	2016-04	2019-04

Test Equipment > 1 GHz					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Anechoic Chamber	Frankonia	AC1	EF00062	-	-
Measurement Receiver	Agilent	N9038A-526/WXP	EF01070	2017-08	2018-08
Antenna	R&S	BBHA 9120D	EF01153	2017-08	2018-08

3.4.5 Procedure

Test Procedure 30 - 1000 MHz	
1. EUT is placed on a non conducting support at the center of a turn table 0.8 m above the ground 2. EUT set to test mode 3. The receiver is set to peak detection with max hold 4. The EUT is rotated through 360° and the height of the antenna is varied from 1 m to 4 m 5. All significant emissions are measured again using the corresponding final detector	

Test Procedure > 1 GHz	
1. EUT is placed on a non conducting support at the center of a turn table 1.5 m above the ground 2. EUT set to test mode 3. The receiver is set to peak detection with max hold 4. The EUT is rotated through 360° and the height of the antenna is varied from 1 m to 4 m 5. All significant emissions are measured again using the corresponding final detector	

3.4.6 Results

Test Results						
Channel [MHz]	Emission [MHz]	Level [dBμV/m]	Det.	Pol.	Limit [dBμV/m]	Margin [dB]
2437	110.6458	38.30	pk	hor	43.50	-05.25
2437	1195	49.50	pk	hor	53.98	-04.48


ANNEX A Transmitter spurious emissions

Spurious emissions according to FCC 15.247

Project number: G0M-1807-7540

Applicant: Leica Geosystems AG
 EUT Name: TiWi BT/WLAN Evaluation Board
 Model: TiWi BT/WLAN Evaluation Board
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Suckow
 Test Conditions: Tnom: 22°C, Vnom: 7.0 VDC
 Antenna: Rohde & Schwarz HK 116, Horizontal
 Measurement distance: 3 m
 Mode: TX; IEEE 802.11n HT20 WLAN MCS0 2412 MHz
 Test Date: 2018-07-20
 Note:

Index 12

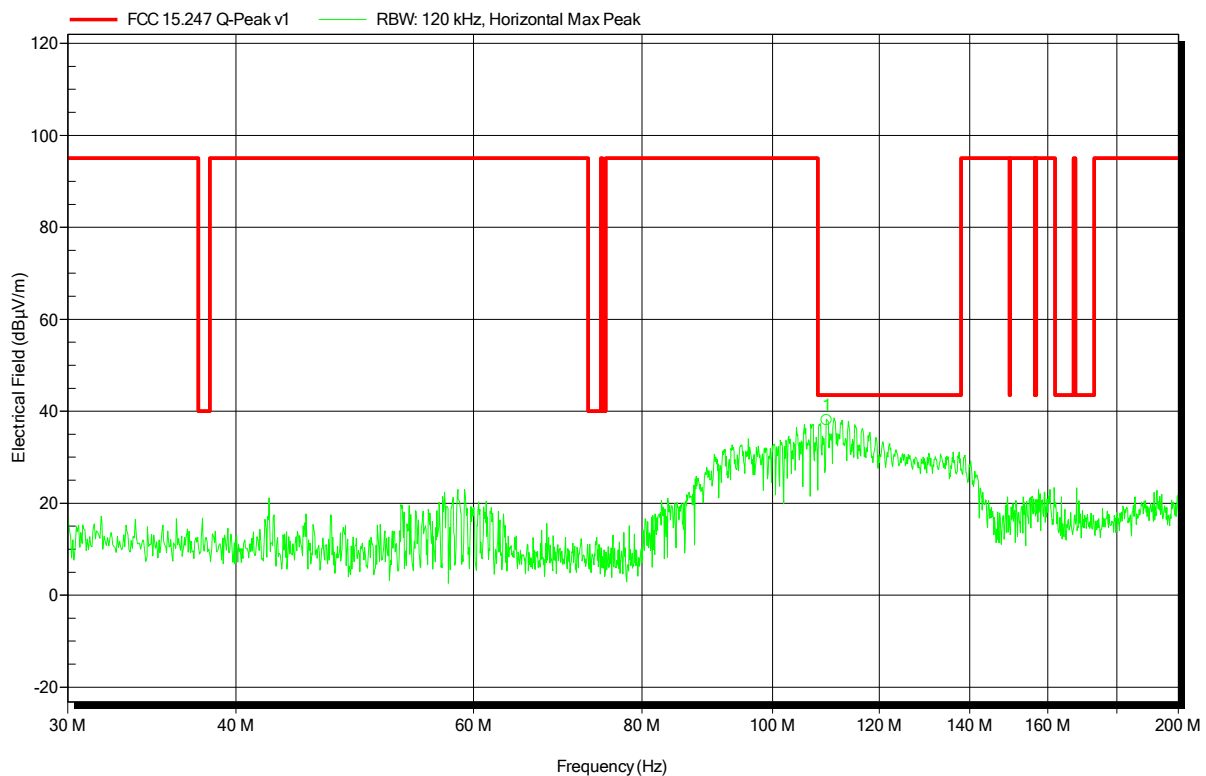


Frequency	Peak	Peak Limit	Peak Difference	Status
109.685 MHz	38.1 dBμV/m	43.5 dBμV/m	-5.45 dB	Pass

Spurious emissions according to FCC 15.247

Project number: G0M-1807-7540

Applicant: Leica Geosystems AG
EUT Name: TiWi BT/WLAN Evaluation Board
Model: TiWi BT/WLAN Evaluation Board
Test Site: Eurofins Product Service GmbH
Operator: Mr. Suckow
Test Conditions: Tnom: 22°C, Vnom: 7.0 VDC
Antenna: Rohde & Schwarz HK 116, Vertical
Measurement distance: 3 m
Mode: TX; IEEE 802.11n HT20 WLAN MCS0 2412 MHz
Test Date: 2018-07-20
Note:

Index 11

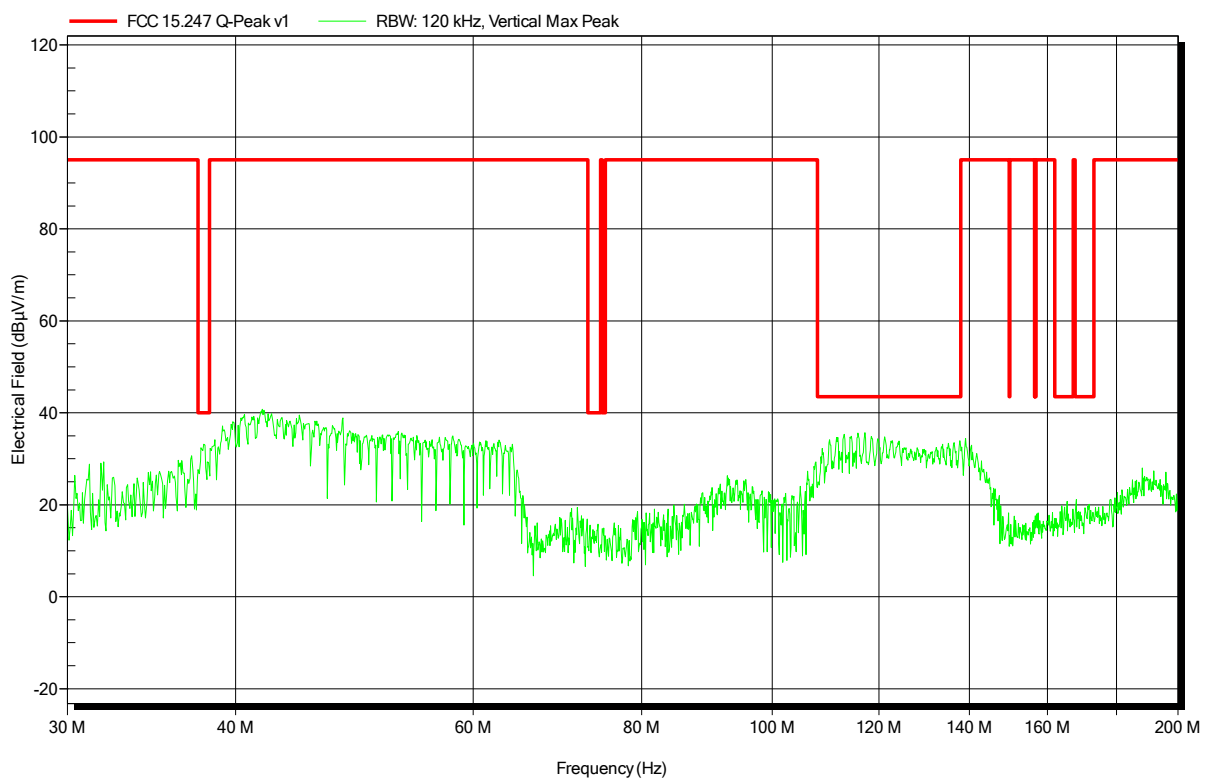


Spurious emissions according to FCC 15.247

Project number: G0M-1807-7540

Applicant: Leica Geosystems AG
EUT Name: TiWi BT/WLAN Evaluation Board
Model: TiWi BT/WLAN Evaluation Board
Test Site: Eurofins Product Service GmbH
Operator: Sebastian Suckow
Test Conditions: Tnom: 24°C, Vnom: 7.0 VDC
Antenna: Rohde & Schwarz HL 223, Horizontal
Measurement distance: 3 m
Mode: TX; IEEE 802.11n HT20 WLAN MCS0 2412 MHz
Test Date: 2018-07-18
Note:

Index 51

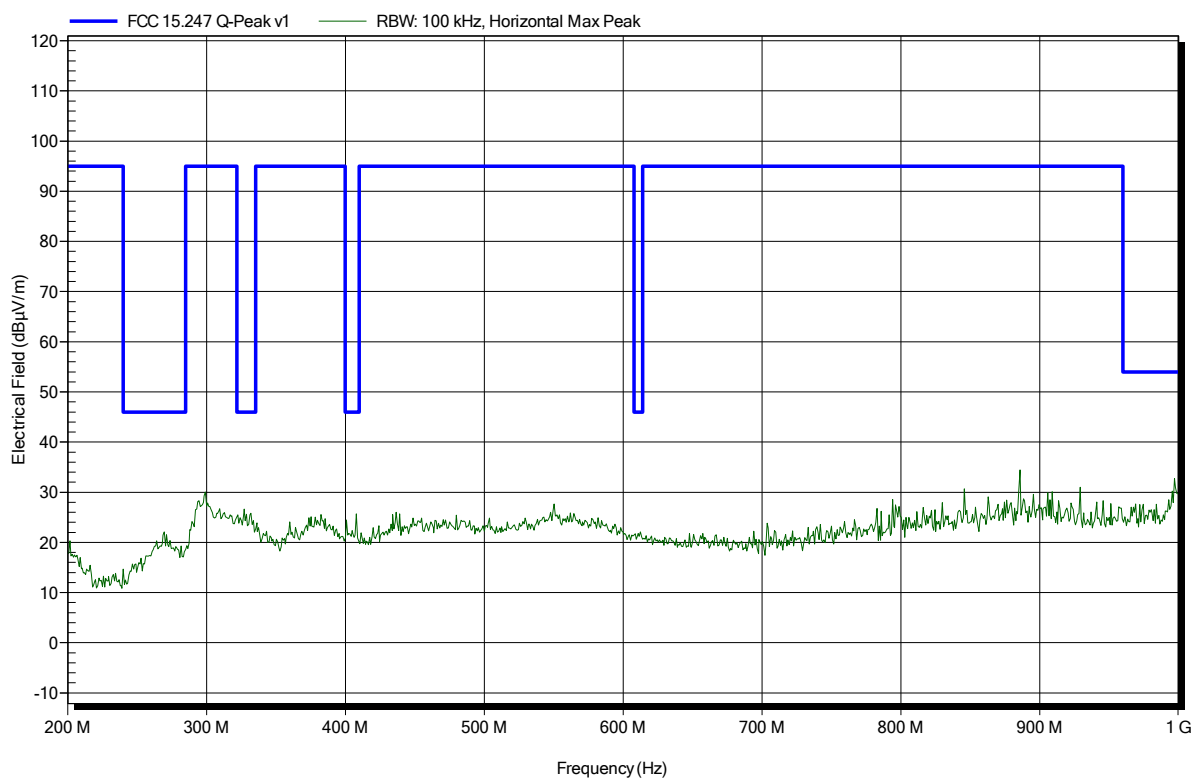


Spurious emissions according to FCC 15.247

Project number: G0M-1807-7540

Applicant: Leica Geosystems AG
 EUT Name: TiWi BT/WLAN Evaluation Board
 Model: TiWi BT/WLAN Evaluation Board
 Test Site: Eurofins Product Service GmbH
 Operator: Sebastian Suckow
 Test Conditions: Tnom: 24°C, Vnom: 7.0 VDC
 Antenna: Rohde & Schwarz HL 223, Vertical
 Measurement distance: 3 m
 Mode: TX; IEEE 802.11n HT20 WLAN MCS0 2412 MHz
 Test Date: 2018-07-18
 Note:

Index 50

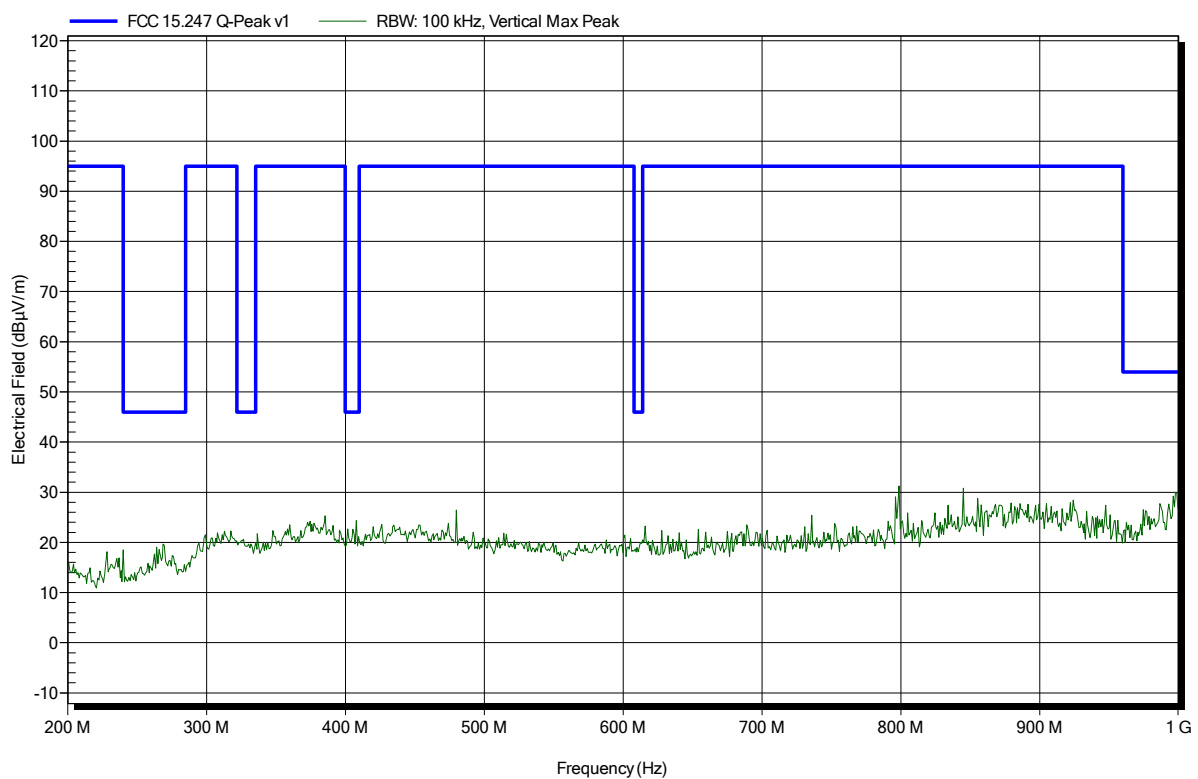

Spurious emissions according to FCC 15.247

Project number: G0M-1807-7540

Applicant: Leica Geosystems AG

EUT Name: TiWi BT/WLAN Evaluation Board

Model: TiWi BT/WLAN Evaluation Board

Test Site: Eurofins Product Service GmbH

Operator: Sebastian Suckow

Test Conditions: Tnom: 24°C, Vnom: 7.0 VDC

Antenna: Schwarzbeck BBHA 9120D, Horizontal


Measurement distance: 1 m converted to 3m

Mode: TX; IEEE 802.11n HT20 WLAN MCS0 2412 MHz

Test Date: 2018-07-18

Note:

Index 21

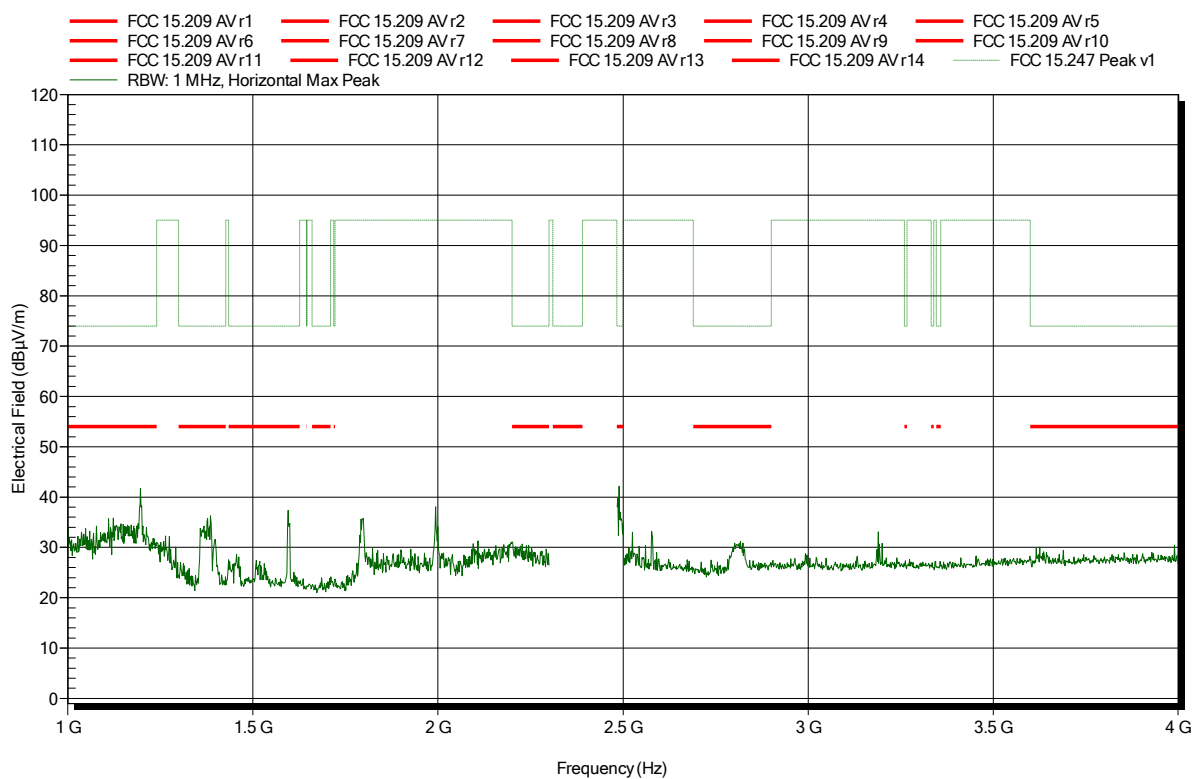

Spurious emissions according to FCC 15.247

Project number: G0M-1807-7540

Applicant: Leica Geosystems AG

EUT Name: TiWi BT/WLAN Evaluation Board

Model: TiWi BT/WLAN Evaluation Board

Test Site: Eurofins Product Service GmbH

Operator: Sebastian Suckow

Test Conditions: Tnom: 24°C, Vnom: 7.0 VDC

Antenna: Schwarzbeck BBHA 9120D, Vertical


Measurement distance: 1 m converted to 3m

Mode: TX; IEEE 802.11n HT20 WLAN MCS0 2412 MHz

Test Date: 2018-07-18

Note:

Index 14

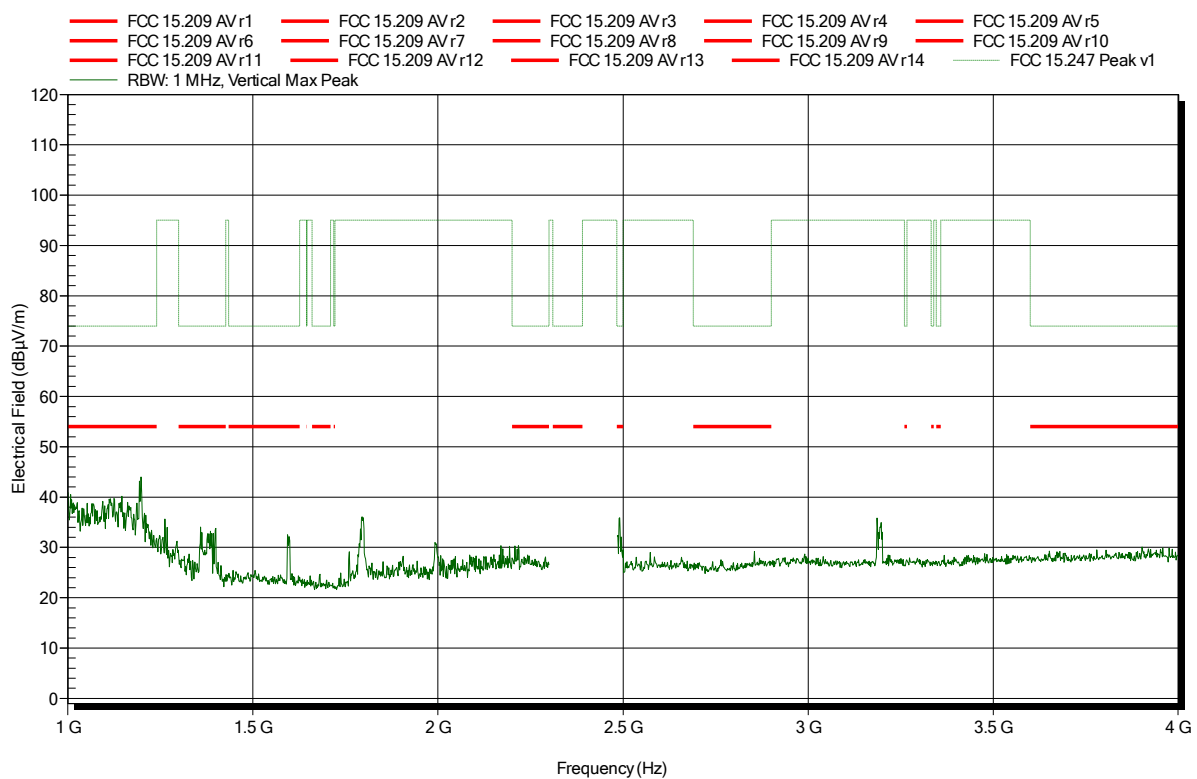


Spurious emissions according to FCC 15.247

Project number: G0M-1807-7540

Applicant: Leica Geosystems AG
 EUT Name: TiWi BT/WLAN Evaluation Board
 Model: TiWi BT/WLAN Evaluation Board
 Test Site: Eurofins Product Service GmbH
 Operator: Sebastian Suckow
 Test Conditions: Tnom: 24°C, Vnom: 7.0 VDC
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; IEEE 802.11n HT20 WLAN MCS0 2412 MHz
 Test Date: 2018-07-18
 Note: lower bandedge

Index 22

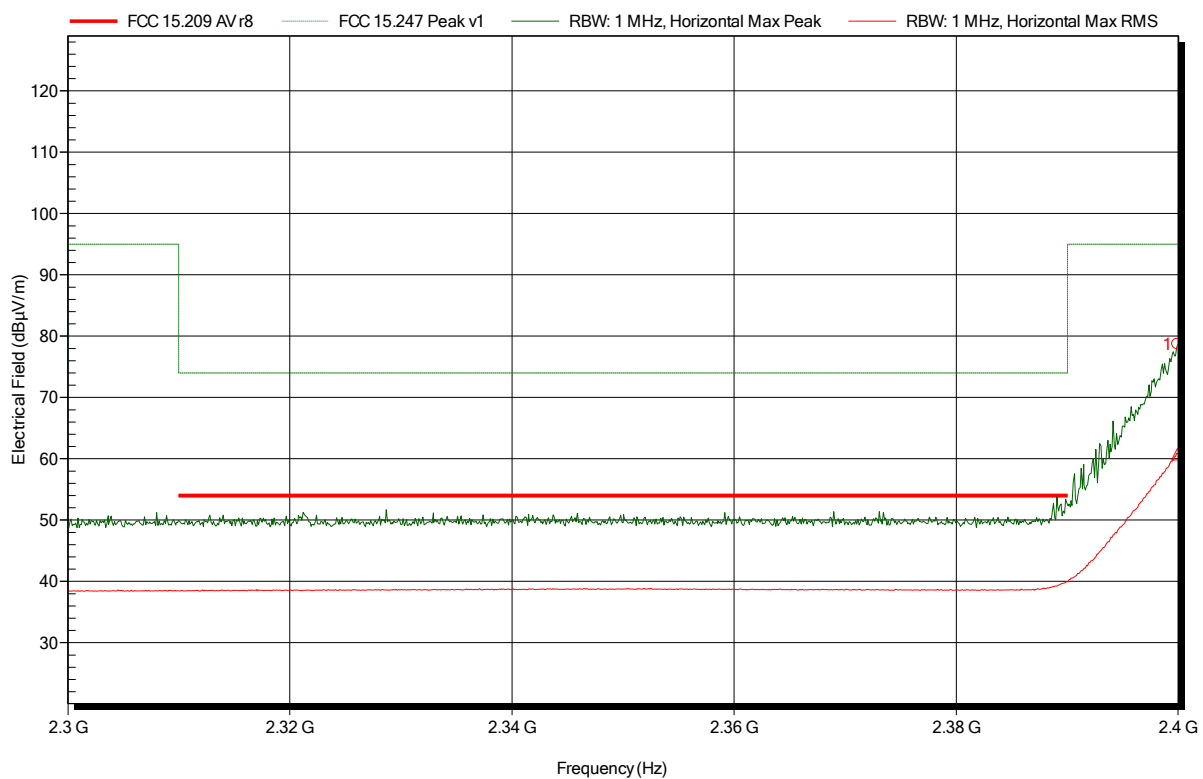


Frequency 2.3999 GHz	Peak 78.69 dBμV/m	Peak Limit 95 dBμV/m	Peak Difference -16.31 dB	Peak Status Pass
Frequency 2.3999 GHz	RMS 60.77 dBμV/m			

Spurious emissions according to FCC 15.247

Project number: G0M-1807-7540

Applicant: Leica Geosystems AG
 EUT Name: TiWi BT/WLAN Evaluation Board
 Model: TiWi BT/WLAN Evaluation Board
 Test Site: Eurofins Product Service GmbH
 Operator: Sebastian Suckow
 Test Conditions: Tnom: 24°C, Vnom: 7.0 VDC
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: TX; IEEE 802.11n HT20 WLAN MCS0 2412 MHz
 Test Date: 2018-07-18
 Note: lower bandedge

Index 15

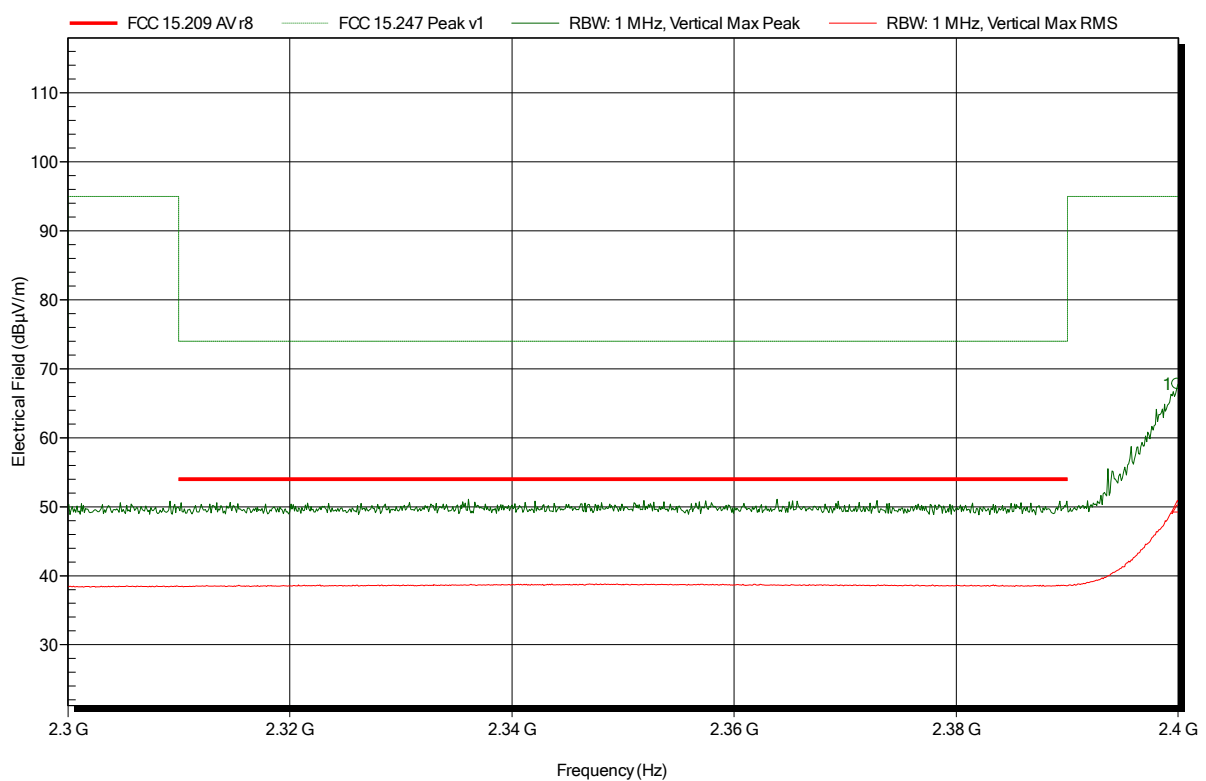


Frequency	Peak	Peak Limit	Peak Difference	Peak Status
2.3999 GHz	67.79 dBμV/m	95 dBμV/m	-27.21 dB	Pass
Frequency	RMS			
2.3999 GHz	50.06 dBμV/m			

Spurious emissions according to FCC 15.247

Project number: G0M-1807-7540

Applicant: Leica Geosystems AG
 EUT Name: TiWi BT/WLAN Evaluation Board
 Model: TiWi BT/WLAN Evaluation Board
 Test Site: Eurofins Product Service GmbH
 Operator: Sebastian Suckow
 Test Conditions: Tnom: 24°C, Vnom: 7.0 VDC
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; IEEE 802.11n HT20 WLAN MCS0 2412 MHz
 Test Date: 2018-07-18
 Note: upper bandedge

Index 23

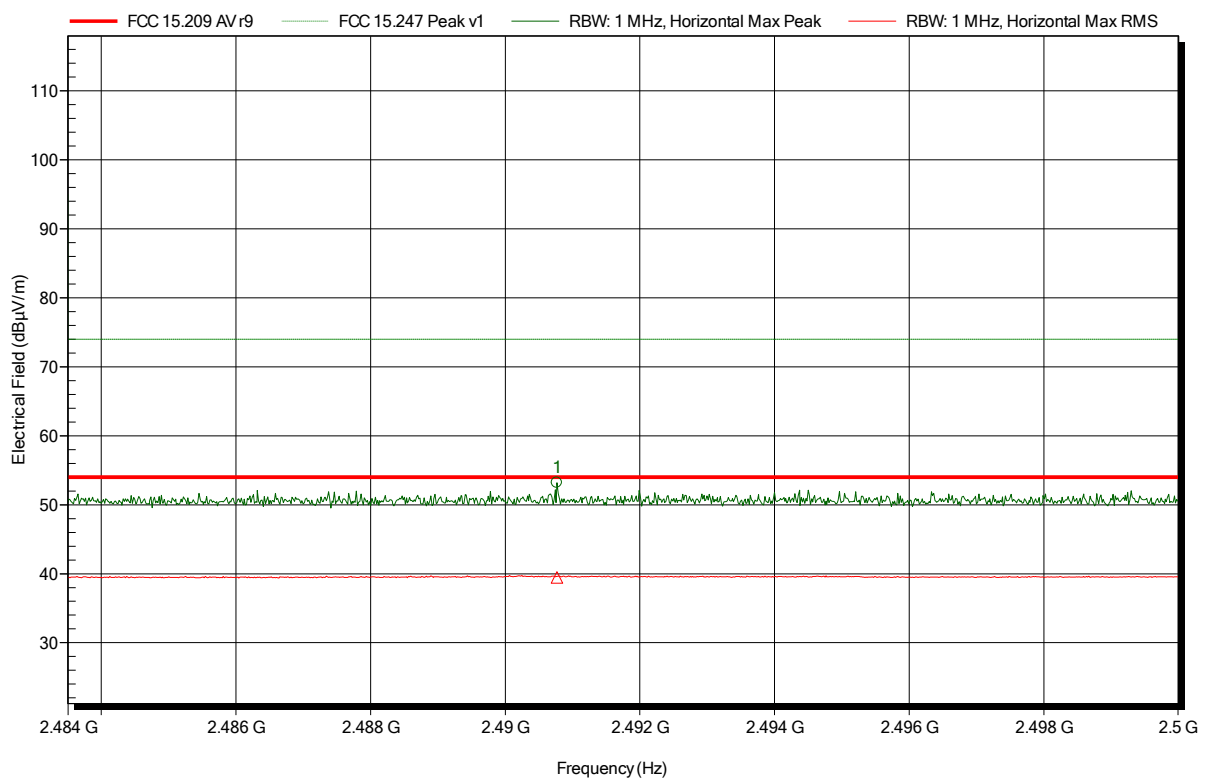


Frequency	Peak	Peak Limit	Peak Difference	Peak Status
2.4908 GHz	53.17 dBµV/m	74 dBµV/m	-20.83 dB	Pass
Frequency	RMS	RMS Limit	RMS Difference	RMS Status
2.4908 GHz	39.48 dBµV/m	54 dBµV/m	-14.52 dB	Pass

Spurious emissions according to FCC 15.247

Project number: G0M-1807-7540

Applicant: Leica Geosystems AG
 EUT Name: TiWi BT/WLAN Evaluation Board
 Model: TiWi BT/WLAN Evaluation Board
 Test Site: Eurofins Product Service GmbH
 Operator: Sebastian Suckow
 Test Conditions: Tnom: 24°C, Vnom: 7.0 VDC
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: TX; IEEE 802.11n HT20 WLAN MCS0 2412 MHz
 Test Date: 2018-07-18
 Note: upper bandedge

Index 16

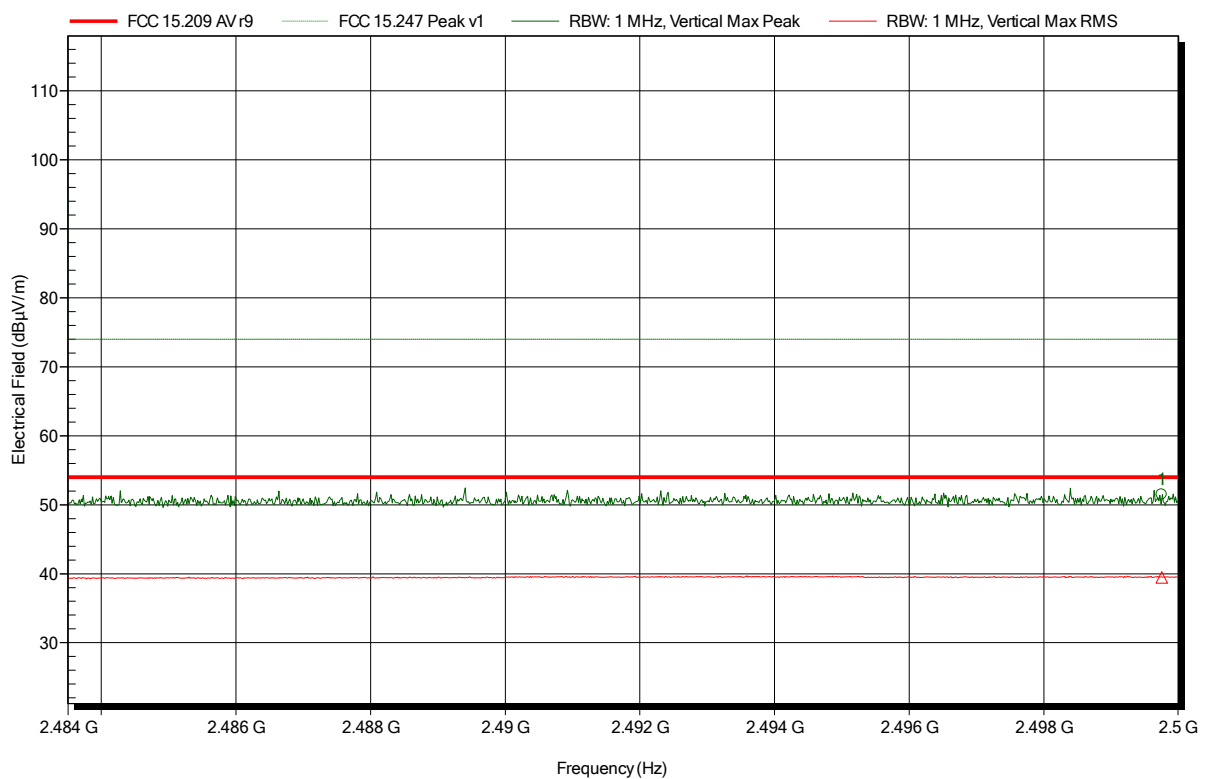


Frequency	Peak	Peak Limit	Peak Difference	Peak Status
2.4998 GHz	51.47 dBµV/m	74 dBµV/m	-22.53 dB	Pass
Frequency	RMS	RMS Limit	RMS Difference	RMS Status
2.4998 GHz	39.45 dBµV/m	54 dBµV/m	-14.55 dB	Pass

Spurious emissions according to FCC 15.247

Project number: G0M-1807-7540

Applicant: Leica Geosystems AG
EUT Name: TiWi BT/WLAN Evaluation Board
Model: TiWi BT/WLAN Evaluation Board
Test Site: Eurofins Product Service GmbH
Operator: Sebastian Suckow
Test Conditions: Tnom: 24°C, Vnom: 7.0 VDC
Antenna: Schwarzbeck BBHA 9120D, Horizontal
Measurement distance: 1 m converted to 3m
Mode: TX; IEEE 802.11n HT20 WLAN MCS0 2412 MHz
Test Date: 2018-07-18
Note:

Index 20

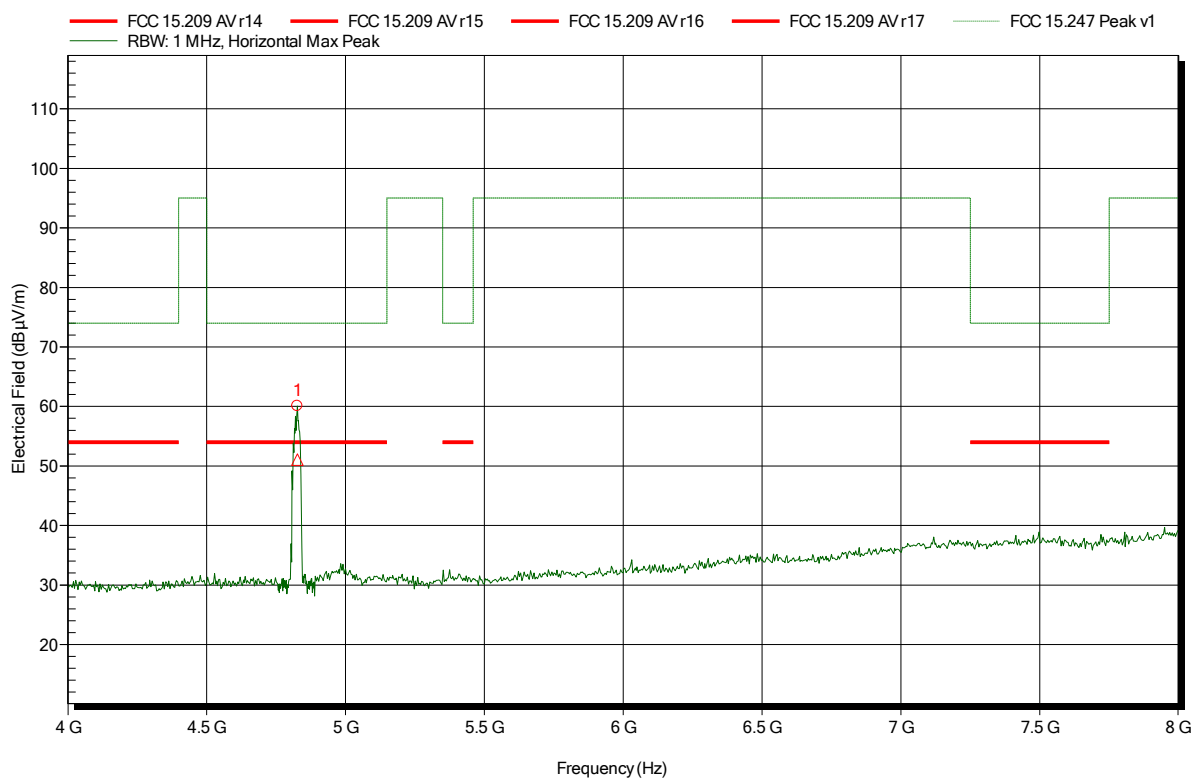


Frequency	Peak	Peak Limit	Peak Difference	Peak Status
4.827 GHz	60.09 dBµV/m	74 dBµV/m	-13.91 dB	Pass
Frequency	RMS	RMS Limit	RMS Difference	RMS Status
4.827 GHz	51.09 dBµV/m	54 dBµV/m	-2.91 dB	Pass

Spurious emissions according to FCC 15.247

Project number: G0M-1807-7540

Applicant: Leica Geosystems AG
 EUT Name: TiWi BT/WLAN Evaluation Board
 Model: TiWi BT/WLAN Evaluation Board
 Test Site: Eurofins Product Service GmbH
 Operator: Sebastian Suckow
 Test Conditions: Tnom: 24°C, Vnom: 7.0 VDC
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: TX; IEEE 802.11n HT20 WLAN MCS0 2412 MHz
 Test Date: 2018-07-18
 Note:

Index 17

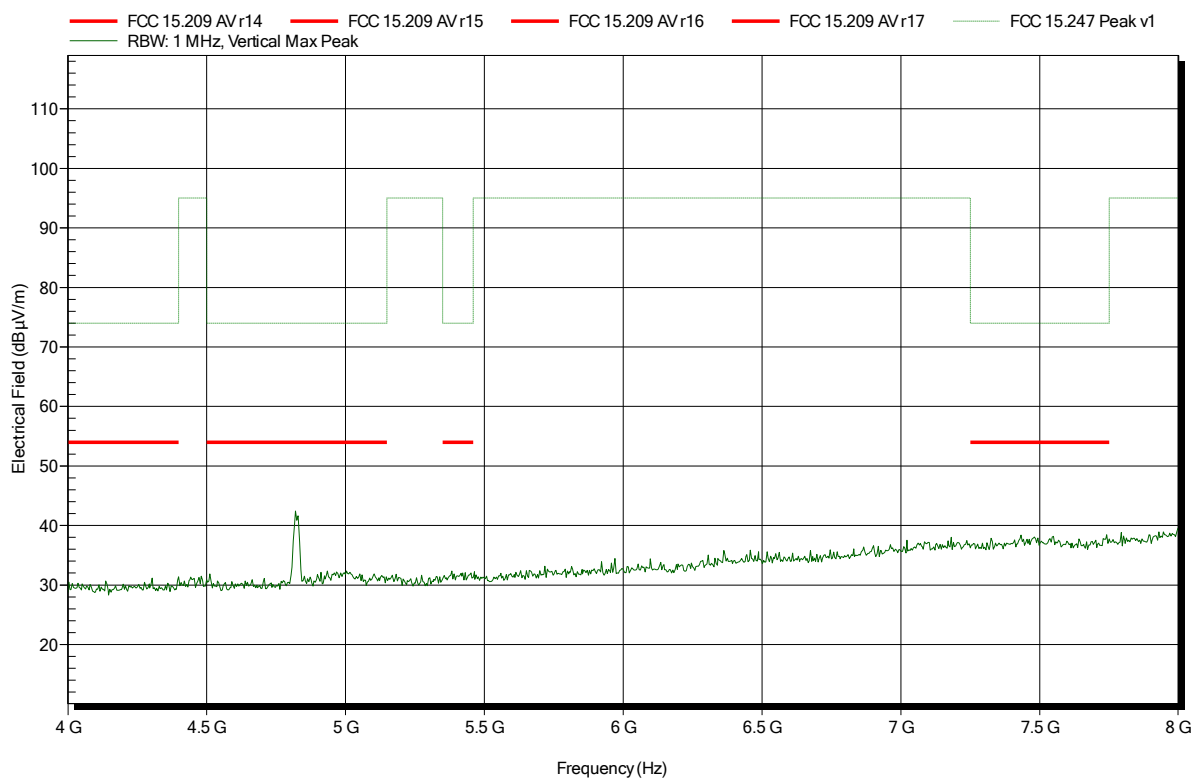


Spurious emissions according to FCC 15.247

Project number: G0M-1807-7540

Applicant: Leica Geosystems AG
 EUT Name: TiWi BT/WLAN Evaluation Board
 Model: TiWi BT/WLAN Evaluation Board
 Test Site: Eurofins Product Service GmbH
 Operator: Sebastian Suckow
 Test Conditions: Tnom: 24°C, Vnom: 7.0 VDC
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; IEEE 802.11n HT20 WLAN MCS0 2412 MHz
 Test Date: 2018-07-18
 Note:

Index 19

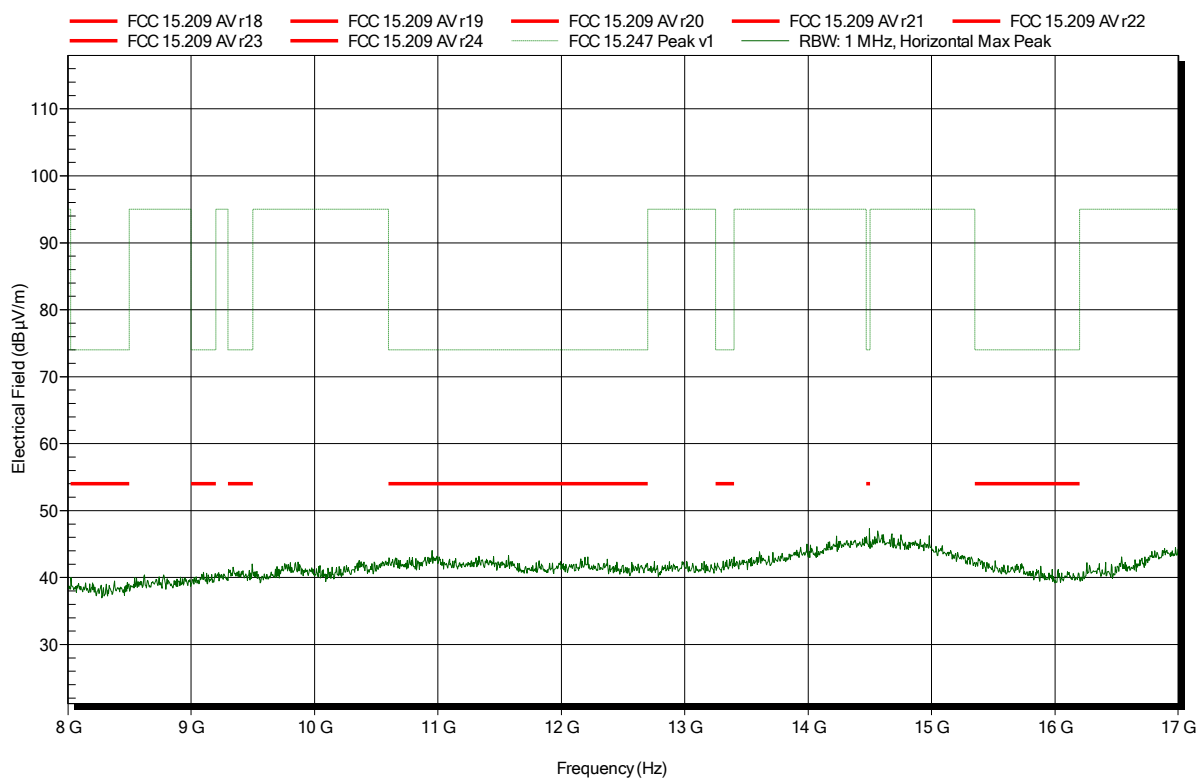


Spurious emissions according to FCC 15.247

Project number: G0M-1807-7540

Applicant: Leica Geosystems AG
 EUT Name: TiWi BT/WLAN Evaluation Board
 Model: TiWi BT/WLAN Evaluation Board
 Test Site: Eurofins Product Service GmbH
 Operator: Sebastian Suckow
 Test Conditions: Tnom: 24°C, Vnom: 7.0 VDC
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: TX; IEEE 802.11n HT20 WLAN MCS0 2412 MHz
 Test Date: 2018-07-18
 Note:

Index 18

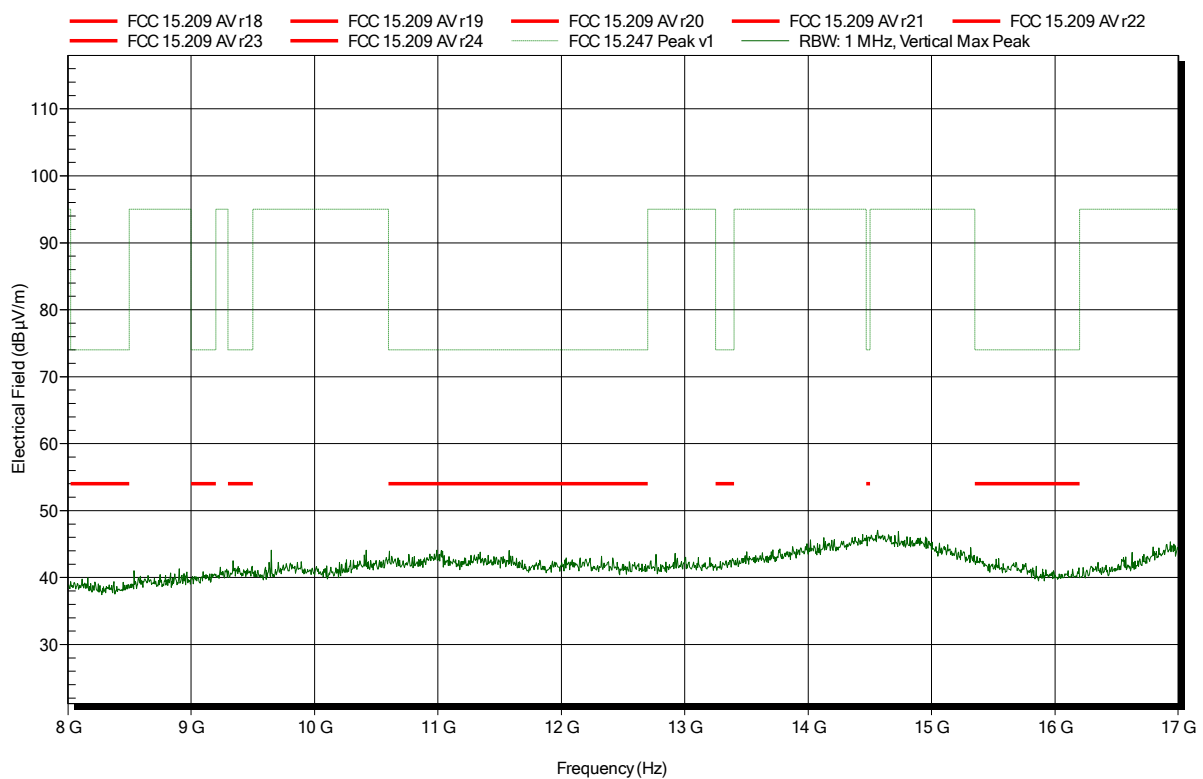


Spurious emissions according to FCC 15.247

Project number: G0M-1807-7540

Applicant: Leica Geosystems AG
 EUT Name: TiWi BT/WLAN Evaluation Board
 Model: TiWi BT/WLAN Evaluation Board
 Test Site: Eurofins Product Service GmbH
 Operator: Sebastian Suckow
 Test Conditions: Tnom: 24°C, Vnom: 7.0 VDC
 Antenna: Amplifier Research AT 4560 (old name) / ATH18G40 (new name),
 Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; IEEE 802.11n HT20 WLAN MCS0 2412 MHz
 Test Date: 2018-07-18
 Note:

Index 48

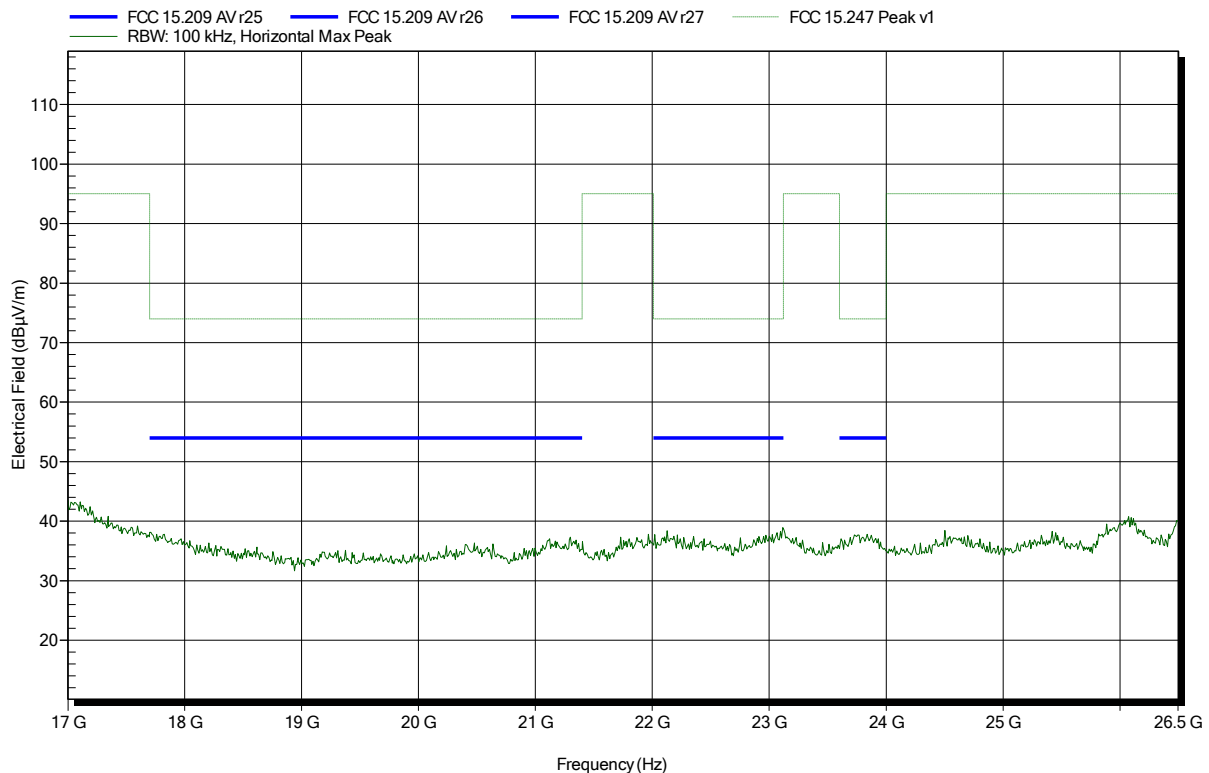


Spurious emissions according to FCC 15.247

Project number: G0M-1807-7540

Applicant: Leica Geosystems AG
EUT Name: TiWi BT/WLAN Evaluation Board
Model: TiWi BT/WLAN Evaluation Board
Test Site: Eurofins Product Service GmbH
Operator: Sebastian Suckow
Test Conditions: Tnom: 24°C, Vnom: 7.0 VDC
Antenna: Amplifier Research AT 4560 (old name) / ATH18G40 (new name),
Vertical
Measurement distance: 1 m converted to 3m
Mode: TX; IEEE 802.11n HT20 WLAN MCS0 2412 MHz
Test Date: 2018-07-18
Note:

Index 49

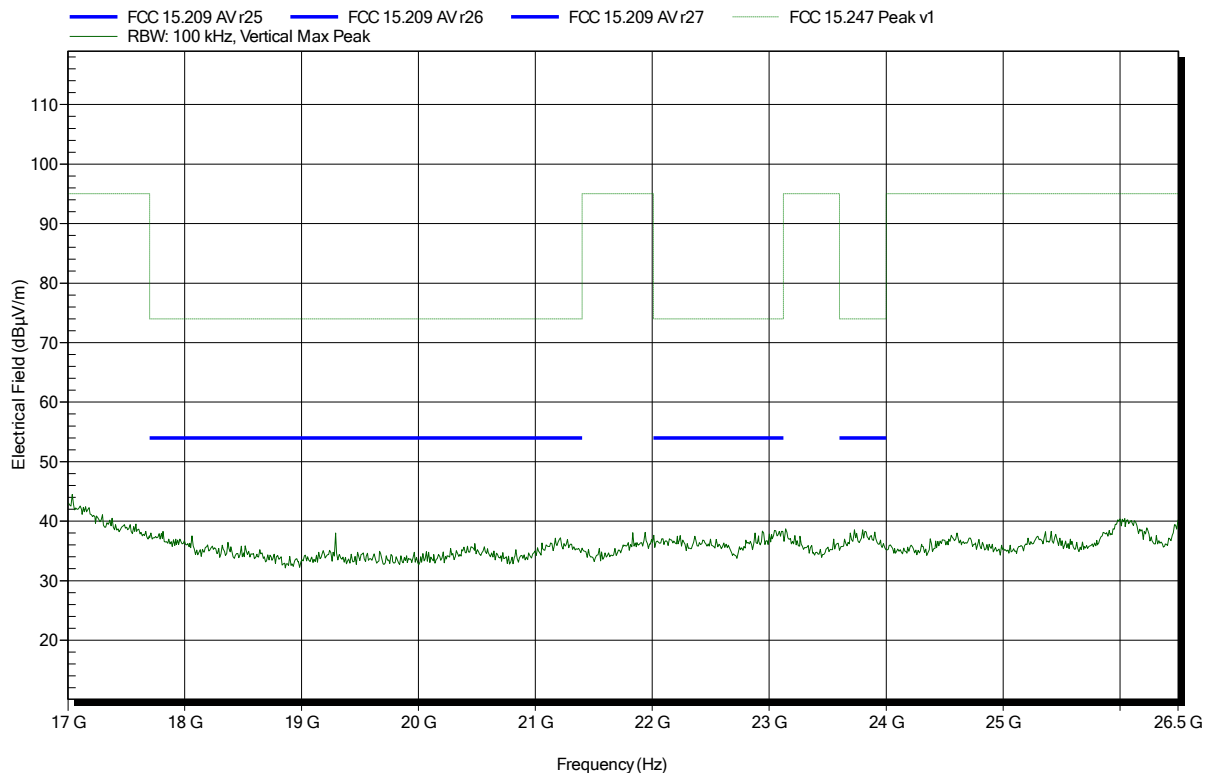


Spurious emissions according to FCC 15.247

Project number: G0M-1807-7540

Applicant: Leica Geosystems AG
 EUT Name: TiWi BT/WLAN Evaluation Board
 Model: TiWi BT/WLAN Evaluation Board
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Suckow
 Test Conditions: Tnom: 22°C, Vnom: 7.0 VDC
 Antenna: Rohde & Schwarz HK 116, Horizontal
 Measurement distance: 3 m
 Mode: TX; IEEE 802.11n HT20 WLAN MCS0 2437 MHz
 Test Date: 2018-07-20
 Note:

Index 13

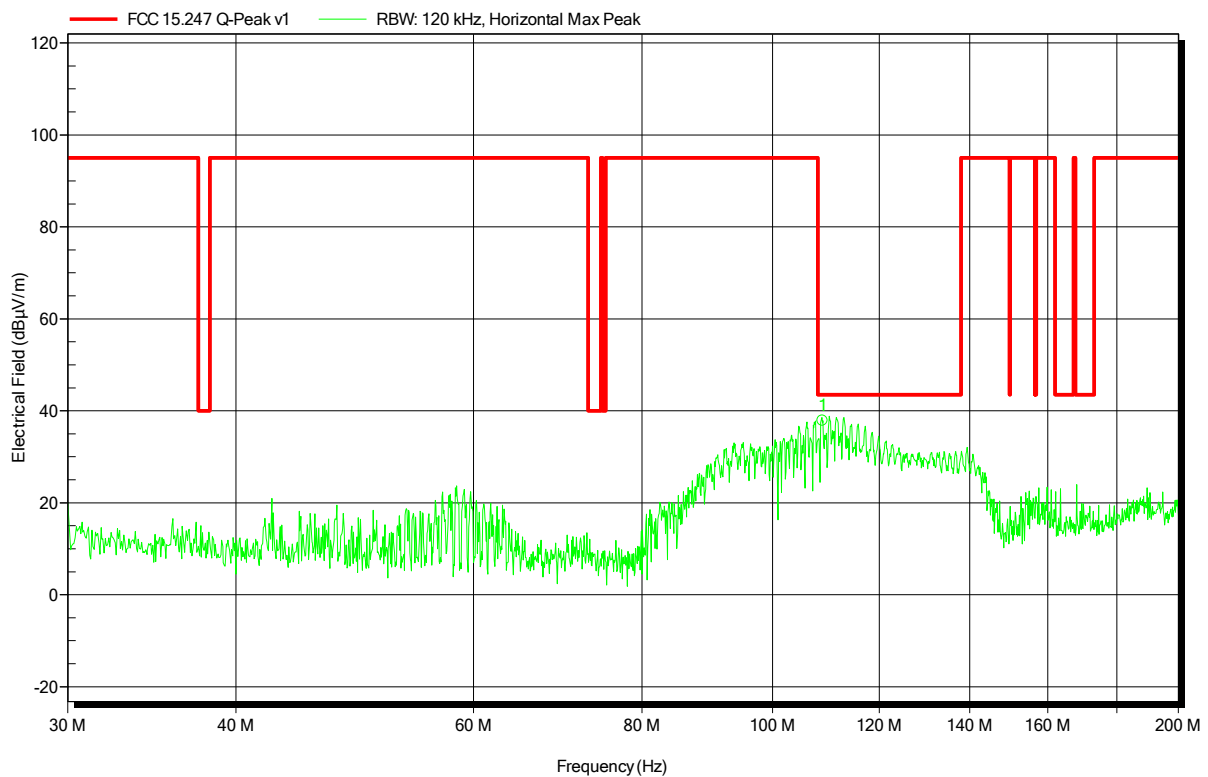


Frequency	Peak	Peak Limit	Peak Difference	Status
108.905 MHz	37.8 dBμV/m	43.5 dBμV/m	-5.68 dB	Pass

Spurious emissions according to FCC 15.247

Project number: G0M-1807-7540

Applicant: Leica Geosystems AG
 EUT Name: TiWi BT/WLAN Evaluation Board
 Model: TiWi BT/WLAN Evaluation Board
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Suckow
 Test Conditions: Tnom: 22°C, Vnom: 7.0 VDC
 Antenna: Rohde & Schwarz HK 116, Vertical
 Measurement distance: 3 m
 Mode: TX; IEEE 802.11n HT20 WLAN MCS0 2437 MHz
 Test Date: 2018-07-20
 Note:

Index 14

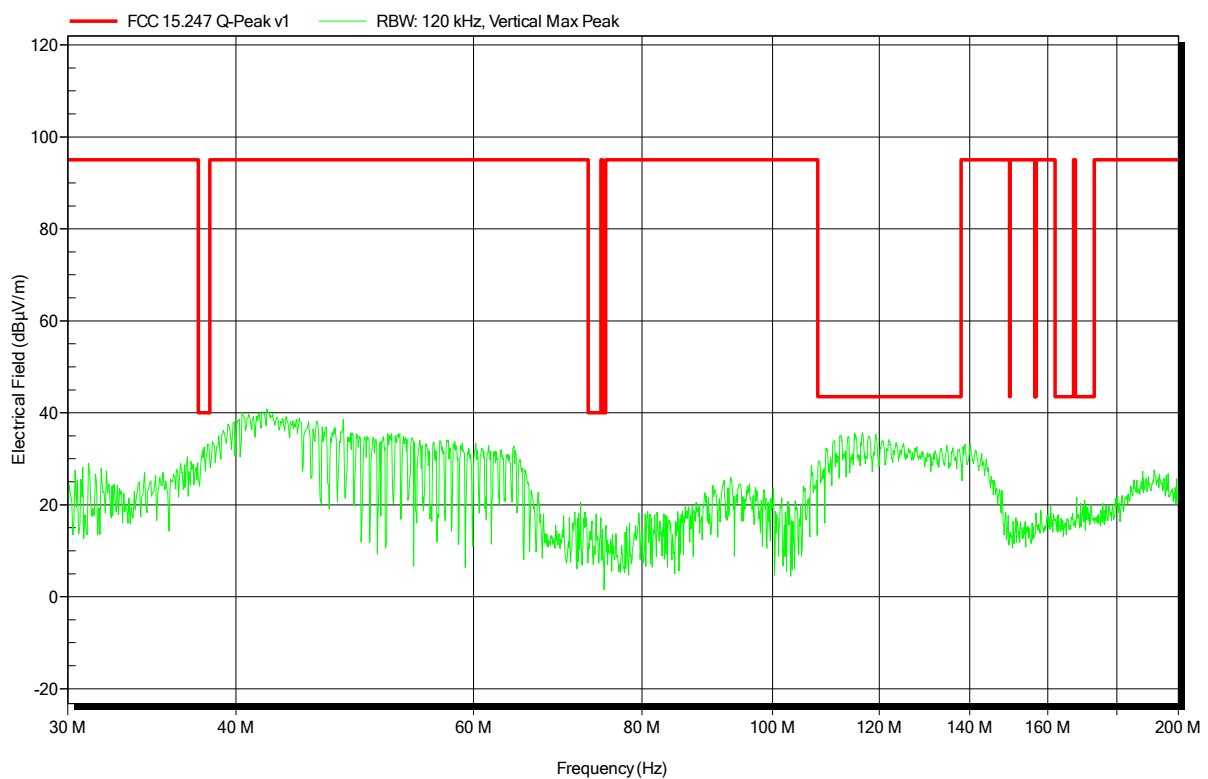


Spurious emissions according to FCC 15.247

Project number: G0M-1807-7540

Applicant: Leica Geosystems AG
EUT Name: TiWi BT/WLAN Evaluation Board
Model: TiWi BT/WLAN Evaluation Board
Test Site: Eurofins Product Service GmbH
Operator: Sebastian Suckow
Test Conditions: Tnom: 24°C, Vnom: 7.0 VDC
Antenna: Rohde & Schwarz HL 223, Horizontal
Measurement distance: 3 m
Mode: TX; IEEE 802.11n HT20 WLAN MCS0 2437 MHz
Test Date: 2018-07-18
Note:

Index 52

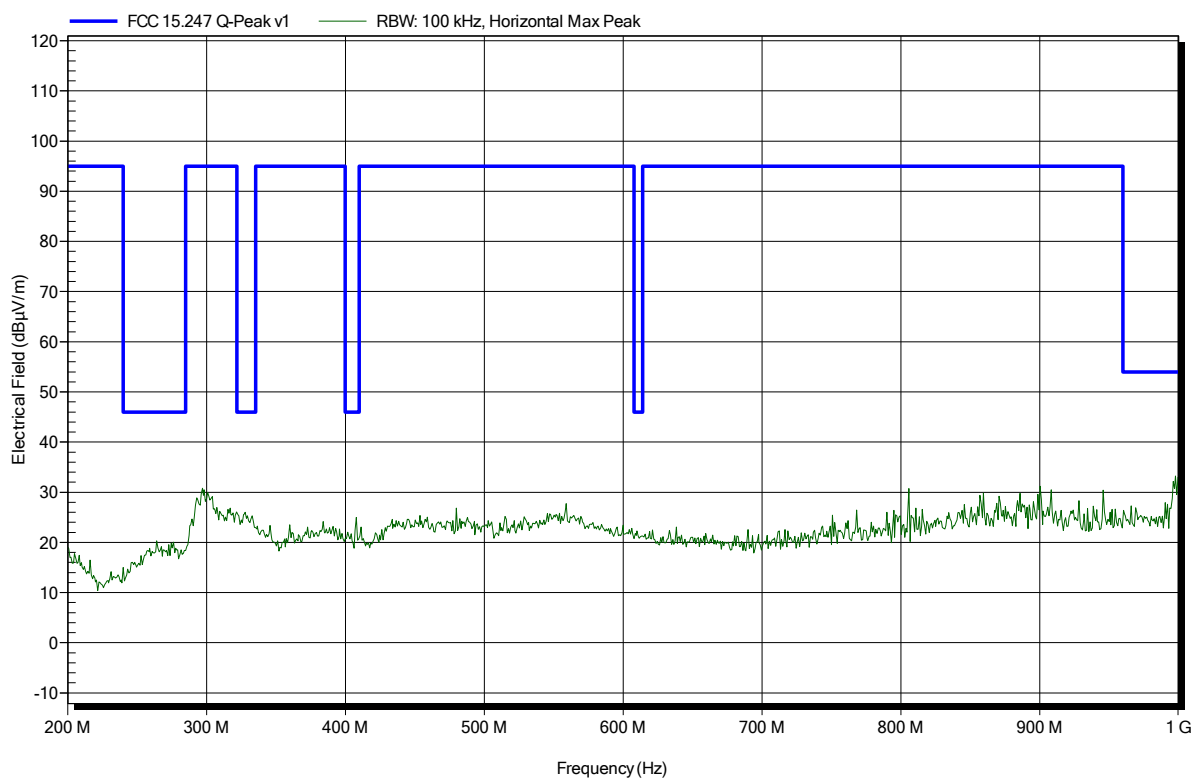


Spurious emissions according to FCC 15.247

Project number: G0M-1807-7540

Applicant: Leica Geosystems AG
EUT Name: TiWi BT/WLAN Evaluation Board
Model: TiWi BT/WLAN Evaluation Board
Test Site: Eurofins Product Service GmbH
Operator: Sebastian Suckow
Test Conditions: Tnom: 24°C, Vnom: 7.0 VDC
Antenna: Rohde & Schwarz HL 223, Vertical
Measurement distance: 3 m
Mode: TX; IEEE 802.11n HT20 WLAN MCS0 2437 MHz
Test Date: 2018-07-18
Note:

Index 53

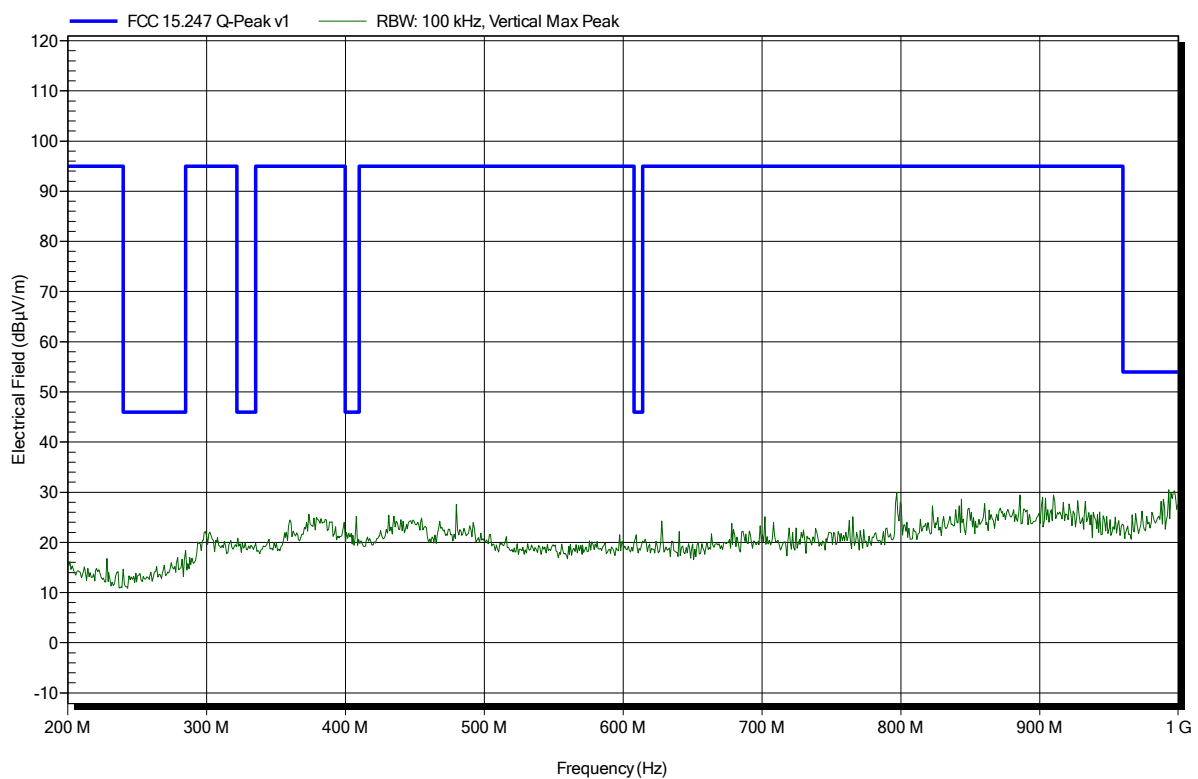

Spurious emissions according to FCC 15.247

Project number: G0M-1807-7540

Applicant: Leica Geosystems AG

EUT Name: TiWi BT/WLAN Evaluation Board

Model: TiWi BT/WLAN Evaluation Board

Test Site: Eurofins Product Service GmbH

Operator: Sebastian Suckow

Test Conditions: Tnom: 24°C, Vnom: 7.0 VDC

Antenna: Schwarzbeck BBHA 9120D, Horizontal


Measurement distance: 1 m converted to 3m

Mode: TX; IEEE 802.11n HT20 WLAN MCS0 2437 MHz

Test Date: 2018-07-18

Note:

Index 35

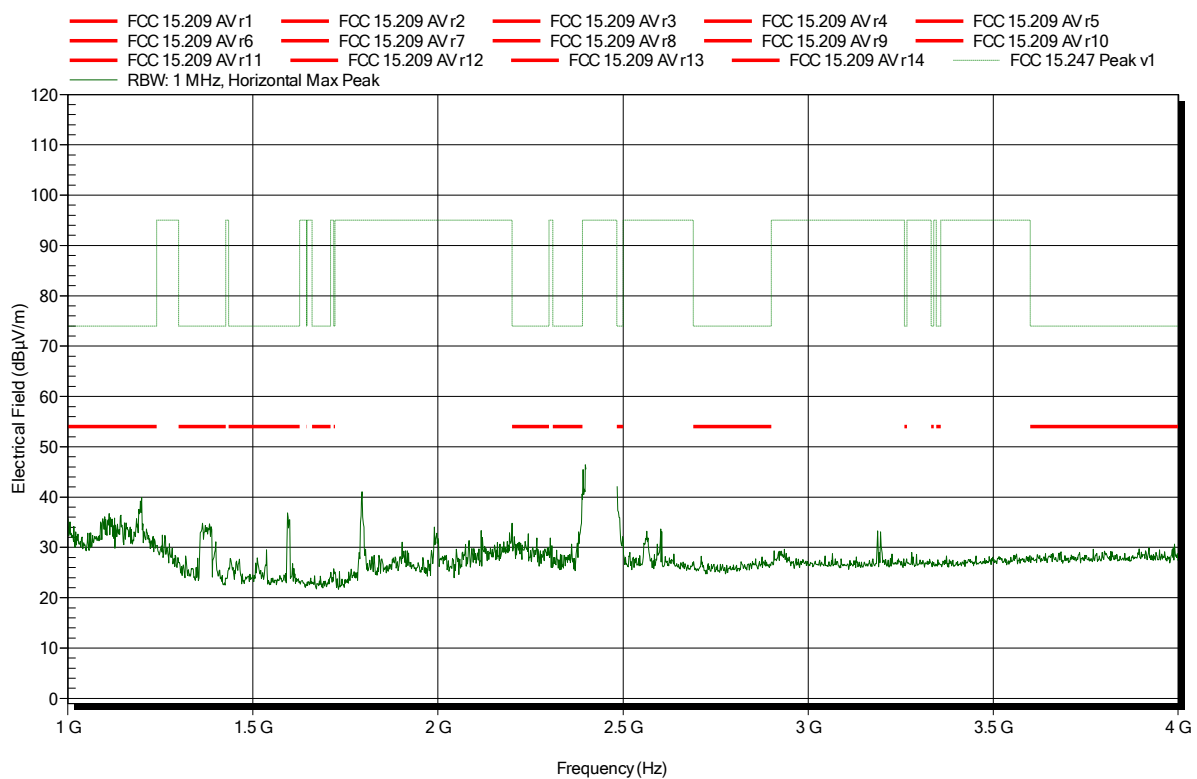

Spurious emissions according to FCC 15.247

Project number: G0M-1807-7540

Applicant: Leica Geosystems AG

EUT Name: TiWi BT/WLAN Evaluation Board

Model: TiWi BT/WLAN Evaluation Board

Test Site: Eurofins Product Service GmbH

Operator: Sebastian Suckow

Test Conditions: Tnom: 24°C, Vnom: 7.0 VDC

Antenna: Schwarzbeck BBHA 9120D, Vertical


Measurement distance: 1 m converted to 3m

Mode: TX; IEEE 802.11n HT20 WLAN MCS0 2437 MHz

Test Date: 2018-07-18

Note:

Index 30

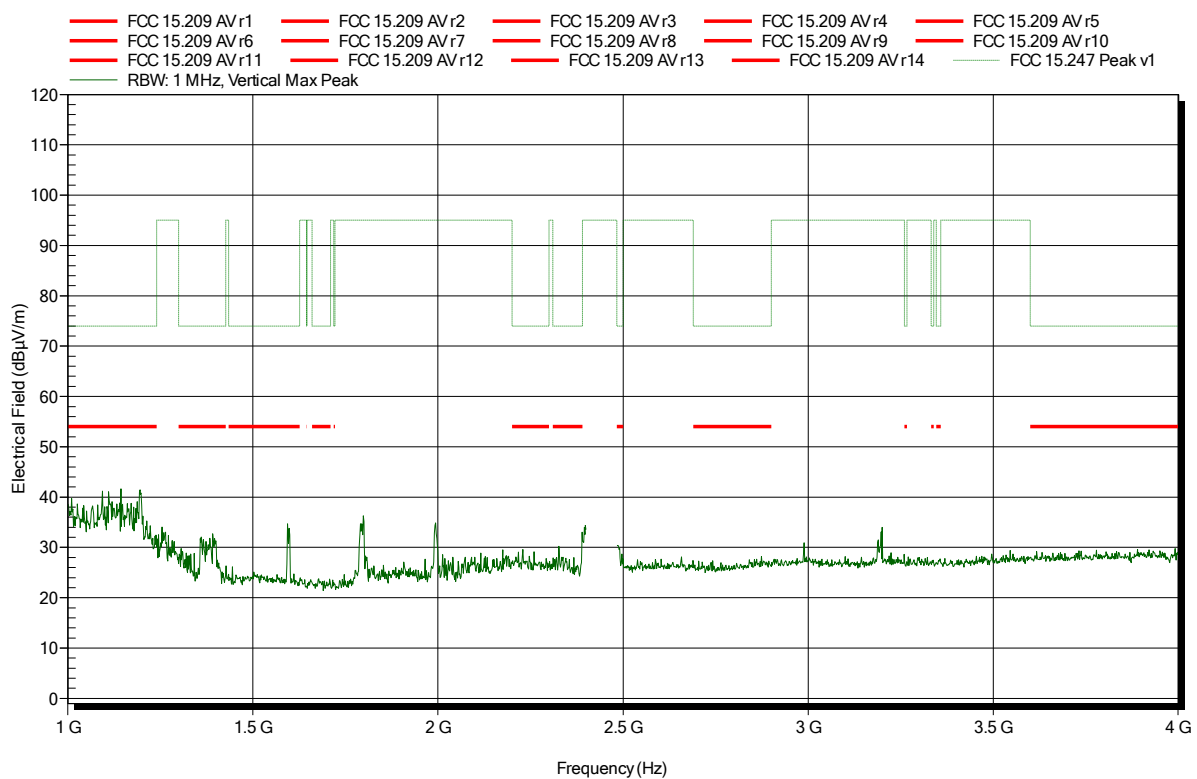


Spurious emissions according to FCC 15.247

Project number: G0M-1807-7540

Applicant: Leica Geosystems AG
 EUT Name: TiWi BT/WLAN Evaluation Board
 Model: TiWi BT/WLAN Evaluation Board
 Test Site: Eurofins Product Service GmbH
 Operator: Sebastian Suckow
 Test Conditions: Tnom: 24°C, Vnom: 7.0 VDC
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; IEEE 802.11n HT20 WLAN MCS0 2437 MHz
 Test Date: 2018-07-18
 Note:

Index 34

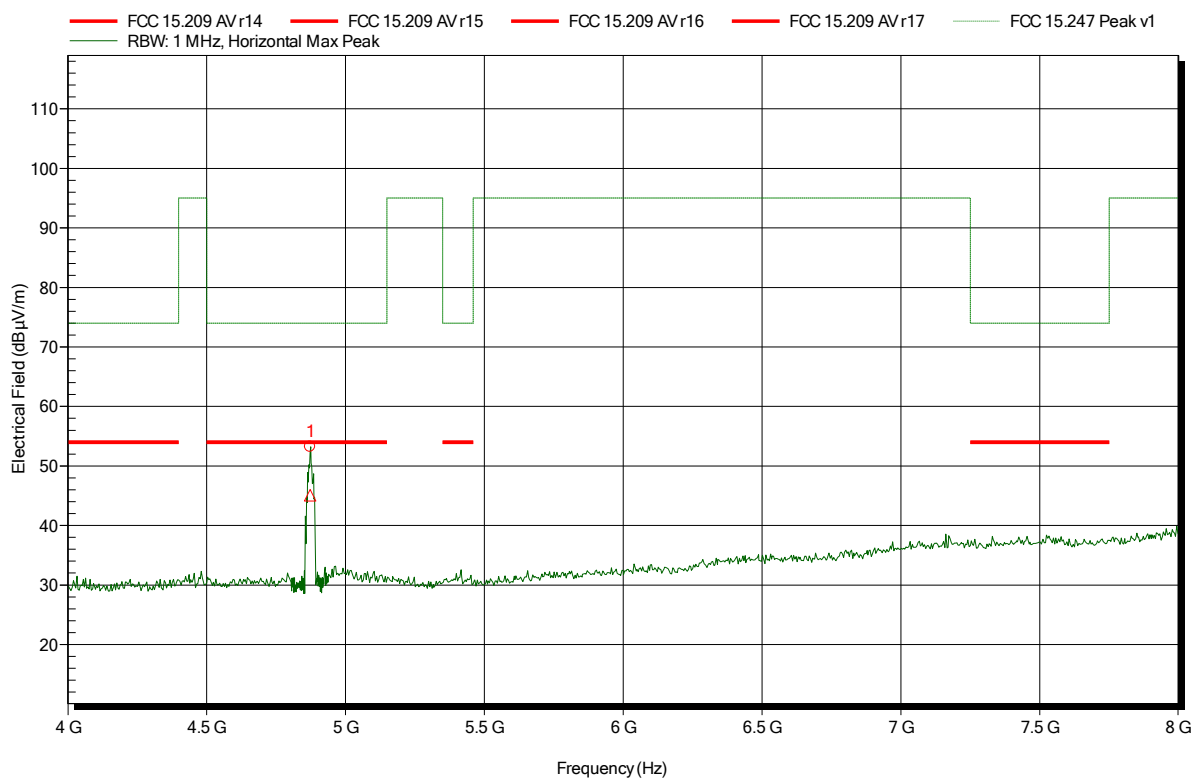


Frequency	Peak	Peak Limit	Peak Difference	Peak Status
4.873 GHz	53.23 dBµV/m	74 dBµV/m	-20.77 dB	Pass
Frequency	RMS	RMS Limit	RMS Difference	RMS Status
4.873 GHz	45.1 dBµV/m	54 dBµV/m	-8.9 dB	Pass

Spurious emissions according to FCC 15.247

Project number: G0M-1807-7540

Applicant: Leica Geosystems AG
EUT Name: TiWi BT/WLAN Evaluation Board
Model: TiWi BT/WLAN Evaluation Board
Test Site: Eurofins Product Service GmbH
Operator: Sebastian Suckow
Test Conditions: Tnom: 24°C, Vnom: 7.0 VDC
Antenna: Schwarzbeck BBHA 9120D, Vertical
Measurement distance: 1 m converted to 3m
Mode: TX; IEEE 802.11n HT20 WLAN MCS0 2437 MHz
Test Date: 2018-07-18
Note:

Index 31

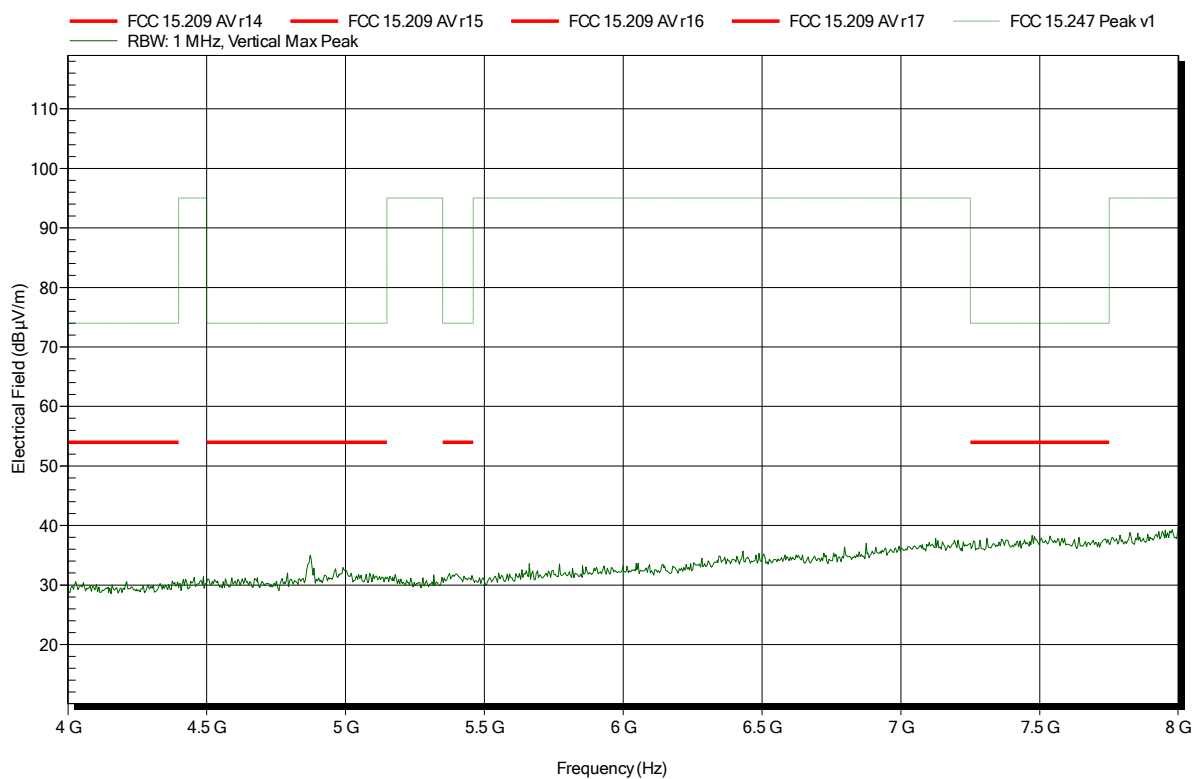


Spurious emissions according to FCC 15.247

Project number: G0M-1807-7540

Applicant: Leica Geosystems AG
 EUT Name: TiWi BT/WLAN Evaluation Board
 Model: TiWi BT/WLAN Evaluation Board
 Test Site: Eurofins Product Service GmbH
 Operator: Sebastian Suckow
 Test Conditions: Tnom: 24°C, Vnom: 7.0 VDC
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; IEEE 802.11n HT20 WLAN MCS0 2437 MHz
 Test Date: 2018-07-18
 Note:

Index 33

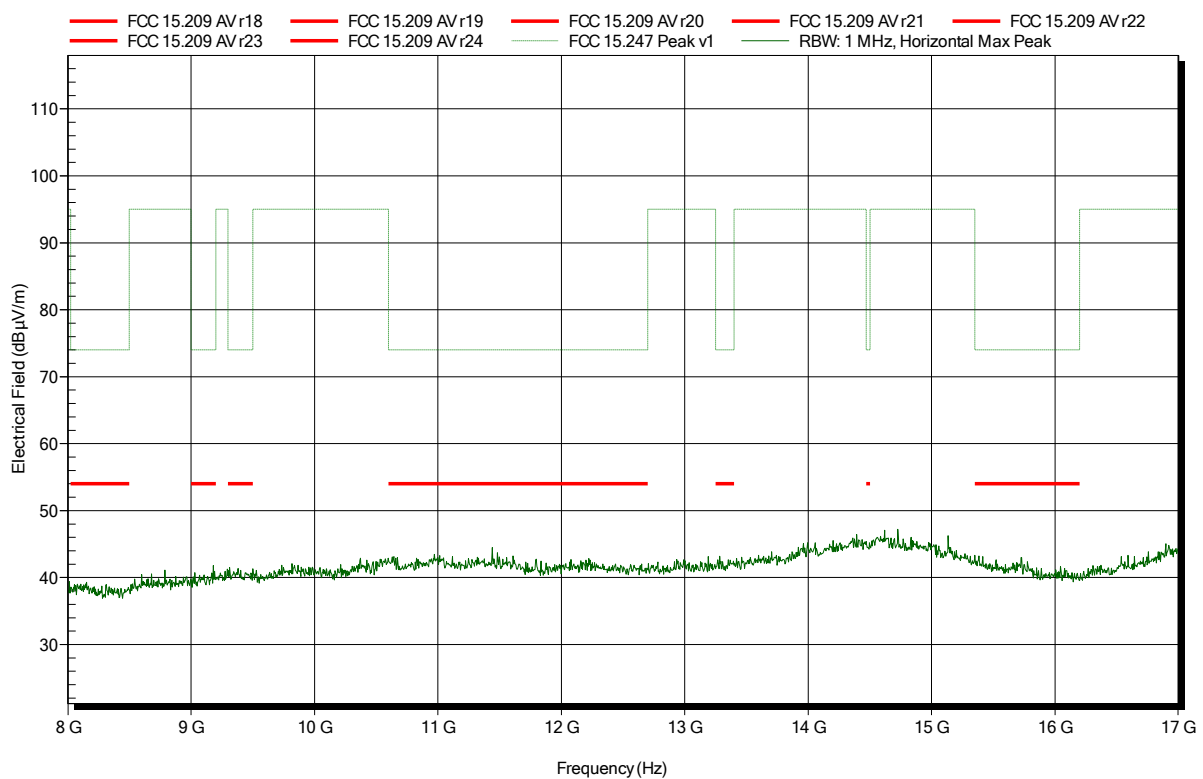


Spurious emissions according to FCC 15.247

Project number: G0M-1807-7540

Applicant: Leica Geosystems AG
 EUT Name: TiWi BT/WLAN Evaluation Board
 Model: TiWi BT/WLAN Evaluation Board
 Test Site: Eurofins Product Service GmbH
 Operator: Sebastian Suckow
 Test Conditions: Tnom: 24°C, Vnom: 7.0 VDC
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: TX; IEEE 802.11n HT20 WLAN MCS0 2437 MHz
 Test Date: 2018-07-18
 Note:

Index 32

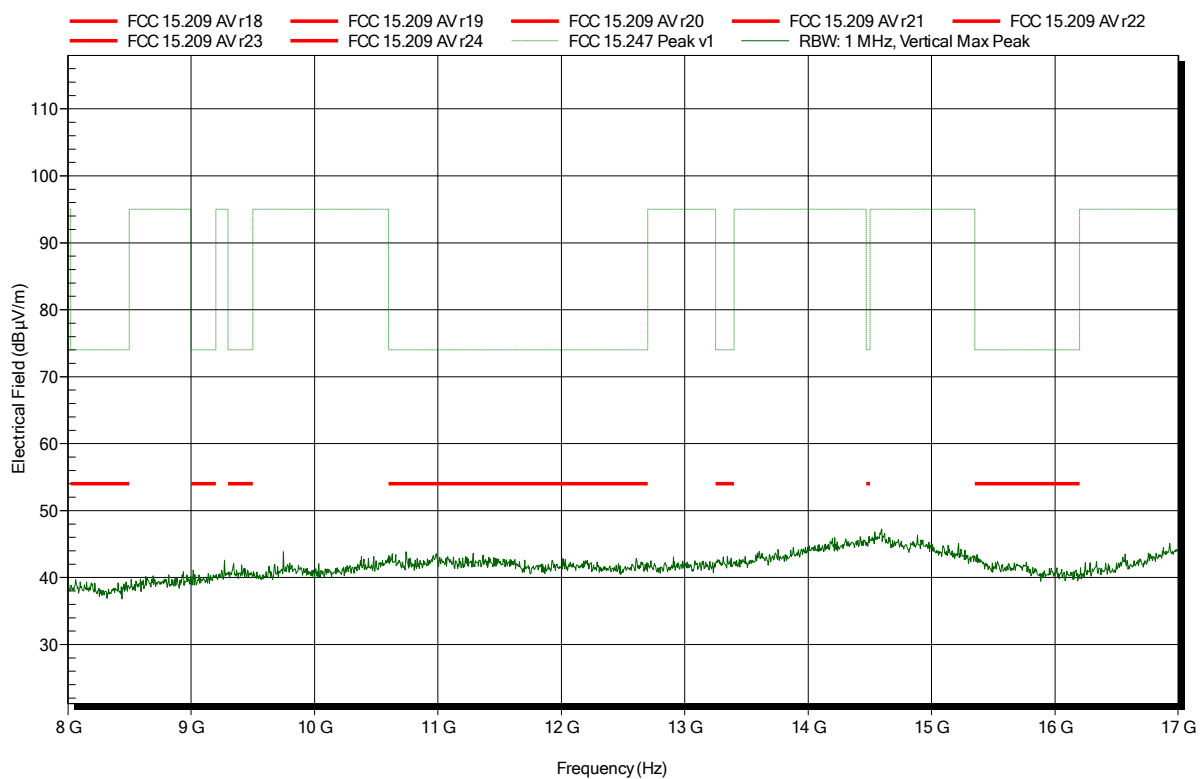


Spurious emissions according to FCC 15.247

Project number: G0M-1807-7540

Applicant: Leica Geosystems AG
EUT Name: TiWi BT/WLAN Evaluation Board
Model: TiWi BT/WLAN Evaluation Board
Test Site: Eurofins Product Service GmbH
Operator: Sebastian Suckow
Test Conditions: Tnom: 24°C, Vnom: 7.0 VDC
Antenna: Amplifier Research AT 4560 (old name) / ATH18G40 (new name),
Horizontal
Measurement distance: 1 m converted to 3m
Mode: TX; IEEE 802.11n HT20 WLAN MCS0 2437 MHz
Test Date: 2018-07-18
Note:

Index 47

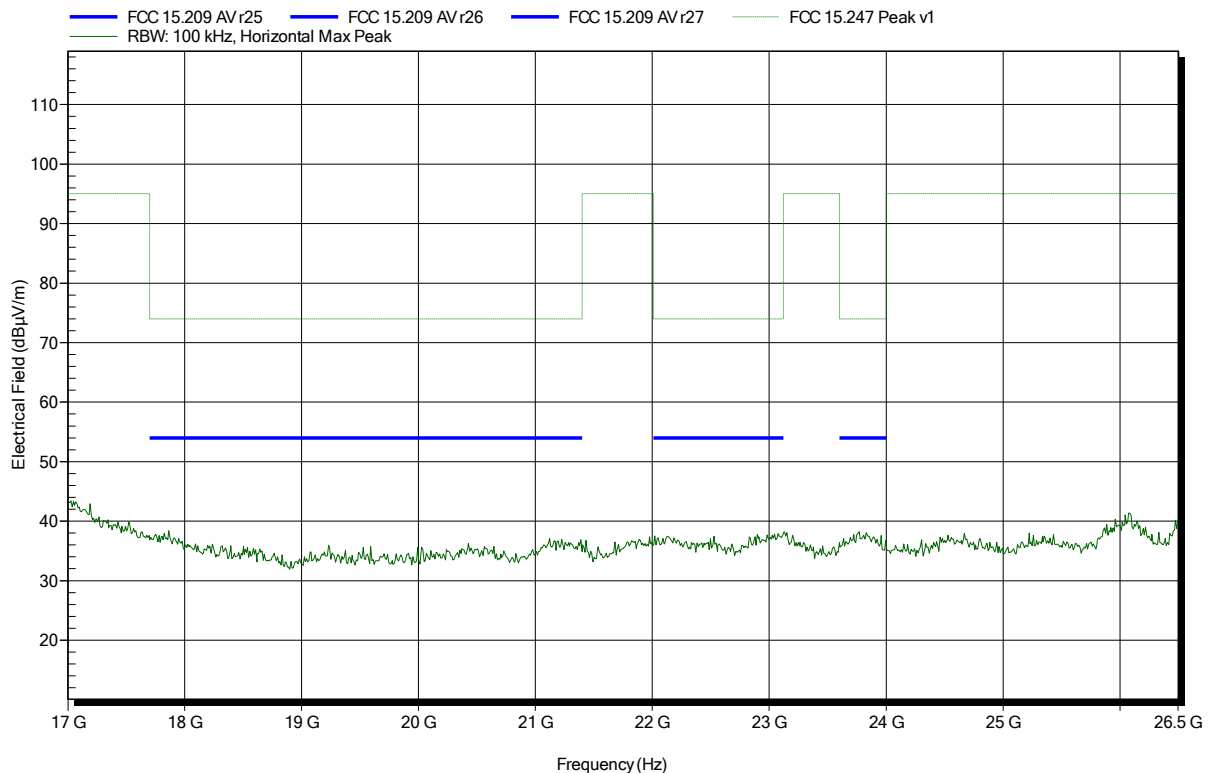


Spurious emissions according to FCC 15.247

Project number: G0M-1807-7540

Applicant: Leica Geosystems AG
EUT Name: TiWi BT/WLAN Evaluation Board
Model: TiWi BT/WLAN Evaluation Board
Test Site: Eurofins Product Service GmbH
Operator: Sebastian Suckow
Test Conditions: Tnom: 24°C, Vnom: 7.0 VDC
Antenna: Amplifier Research AT 4560 (old name) / ATH18G40 (new name),
Vertical
Measurement distance: 1 m converted to 3m
Mode: TX; IEEE 802.11n HT20 WLAN MCS0 2437 MHz
Test Date: 2018-07-18
Note:

Index 46

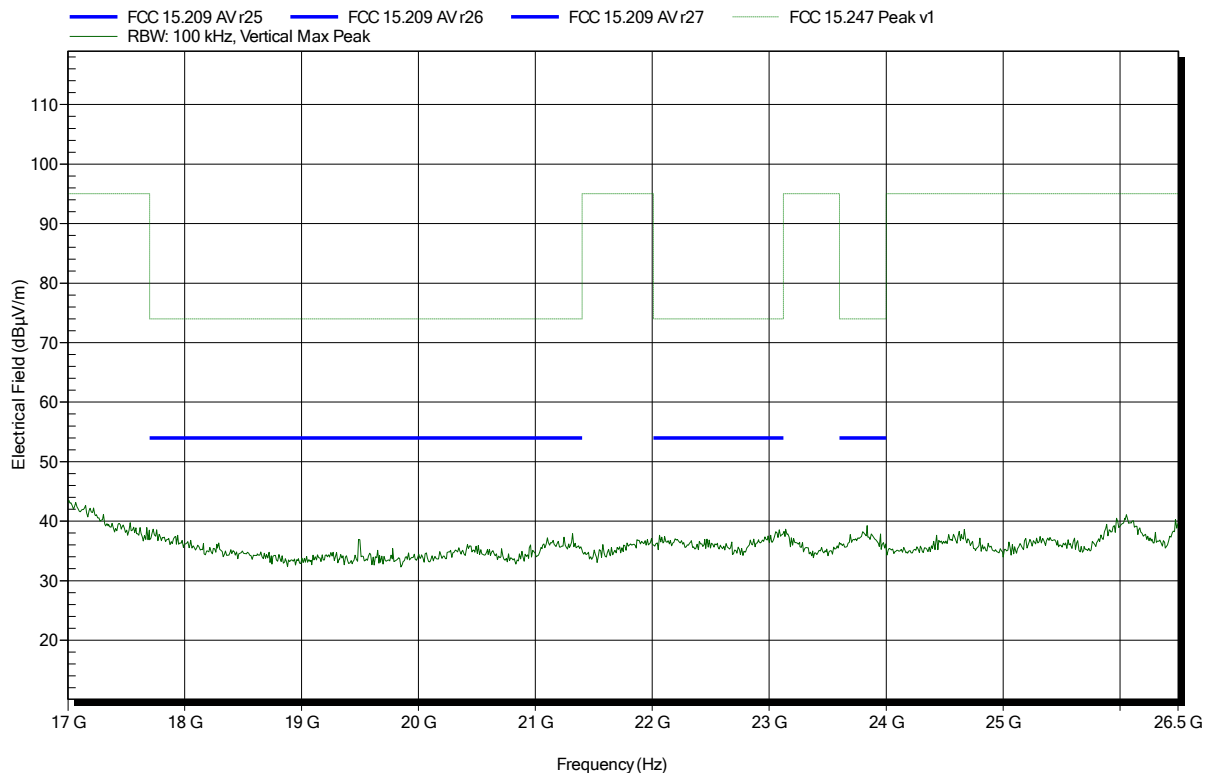


Spurious emissions according to FCC 15.247

Project number: G0M-1807-7540

Applicant: Leica Geosystems AG
 EUT Name: TiWi BT/WLAN Evaluation Board
 Model: TiWi BT/WLAN Evaluation Board
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Suckow
 Test Conditions: Tnom: 22°C, Vnom: 7.0 VDC
 Antenna: Rohde & Schwarz HK 116, Horizontal
 Measurement distance: 3 m
 Mode: TX; IEEE 802.11n HT20 WLAN MCS0 2462 MHz
 Test Date: 2018-07-20
 Note:

Index 16

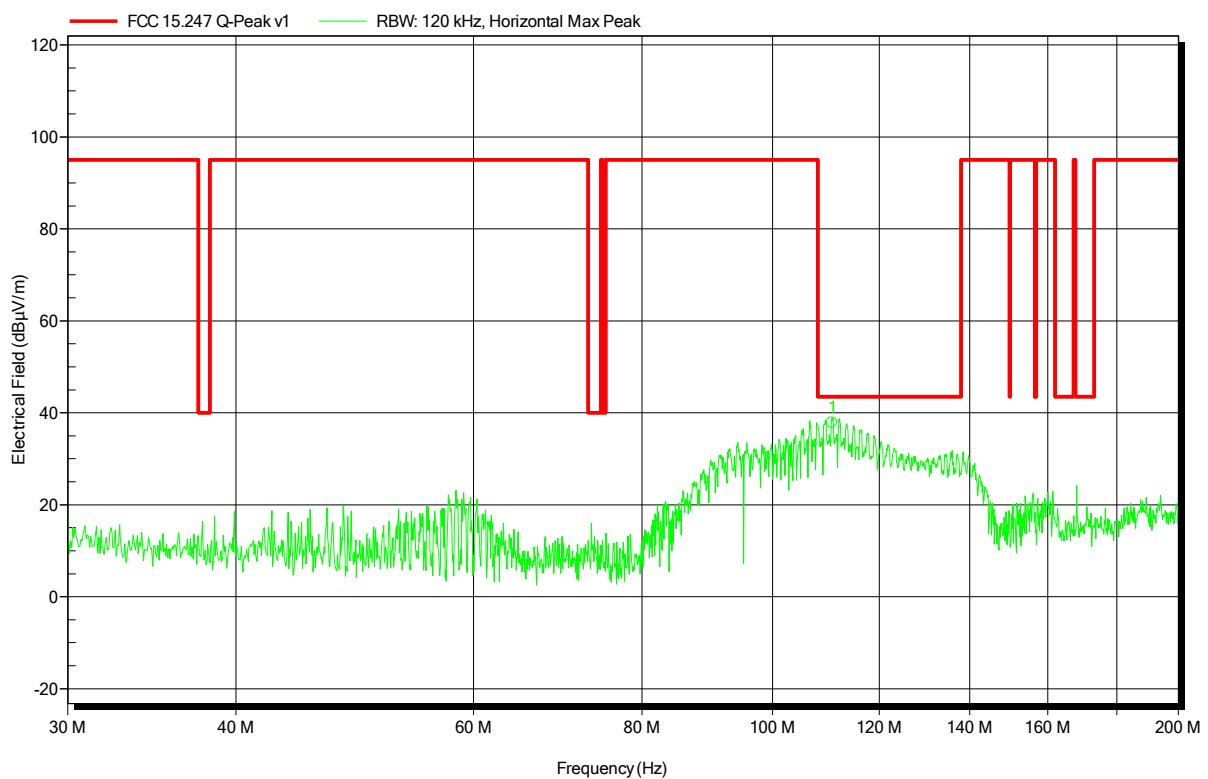


Frequency	Peak	Peak Limit	Peak Difference	Status
110.7059 MHz	37.8 dBµV/m	43.5 dBµV/m	-5.69 dB	Pass

Spurious emissions according to FCC 15.247

Project number: G0M-1807-7540

Applicant: Leica Geosystems AG
EUT Name: TiWi BT/WLAN Evaluation Board
Model: TiWi BT/WLAN Evaluation Board
Test Site: Eurofins Product Service GmbH
Operator: Mr. Suckow
Test Conditions: Tnom: 22°C, Vnom: 7.0 VDC
Antenna: Rohde & Schwarz HK 116, Vertical
Measurement distance: 3 m
Mode: TX; IEEE 802.11n HT20 WLAN MCS0 2462 MHz
Test Date: 2018-07-20
Note:

Index 15

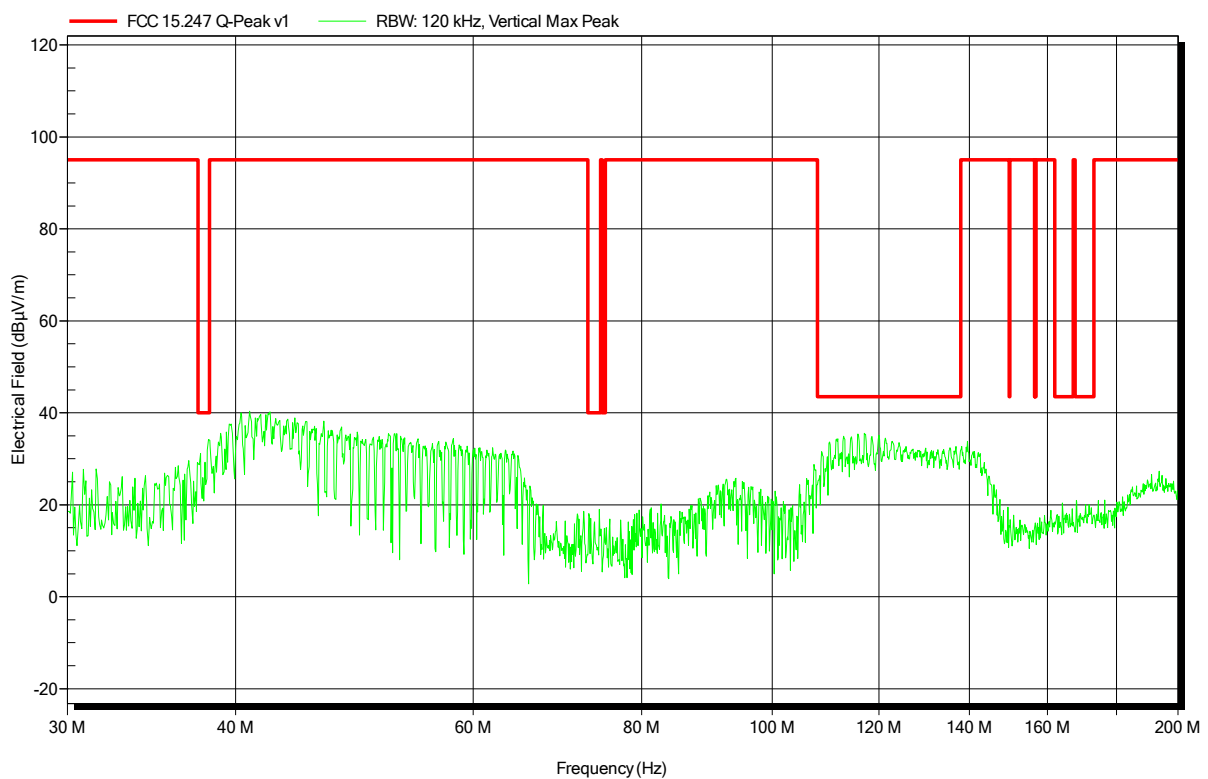


Spurious emissions according to FCC 15.247

Project number: G0M-1807-7540

Applicant: Leica Geosystems AG
 EUT Name: TiWi BT/WLAN Evaluation Board
 Model: TiWi BT/WLAN Evaluation Board
 Test Site: Eurofins Product Service GmbH
 Operator: Sebastian Suckow
 Test Conditions: Tnom: 24°C, Vnom: 7.0 VDC
 Antenna: Rohde & Schwarz HL 223, Horizontal
 Measurement distance: 3 m
 Mode: TX; IEEE 802.11n HT20 WLAN MCS0 2462 MHz
 Test Date: 2018-07-18
 Note:

Index 56

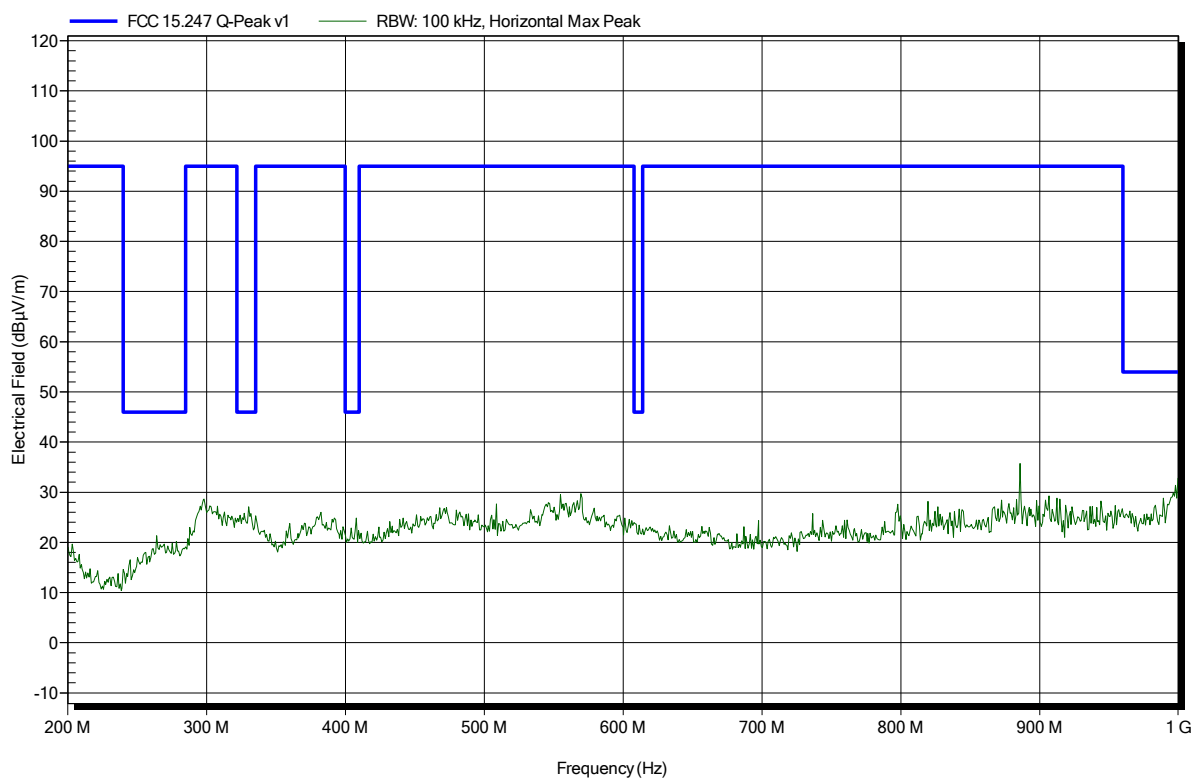


Spurious emissions according to FCC 15.247

Project number: G0M-1807-7540

Applicant: Leica Geosystems AG
 EUT Name: TiWi BT/WLAN Evaluation Board
 Model: TiWi BT/WLAN Evaluation Board
 Test Site: Eurofins Product Service GmbH
 Operator: Sebastian Suckow
 Test Conditions: Tnom: 24°C, Vnom: 7.0 VDC
 Antenna: Rohde & Schwarz HL 223, Vertical
 Measurement distance: 3 m
 Mode: TX; IEEE 802.11n HT20 WLAN MCS0 2462 MHz
 Test Date: 2018-07-18
 Note:

Index 54

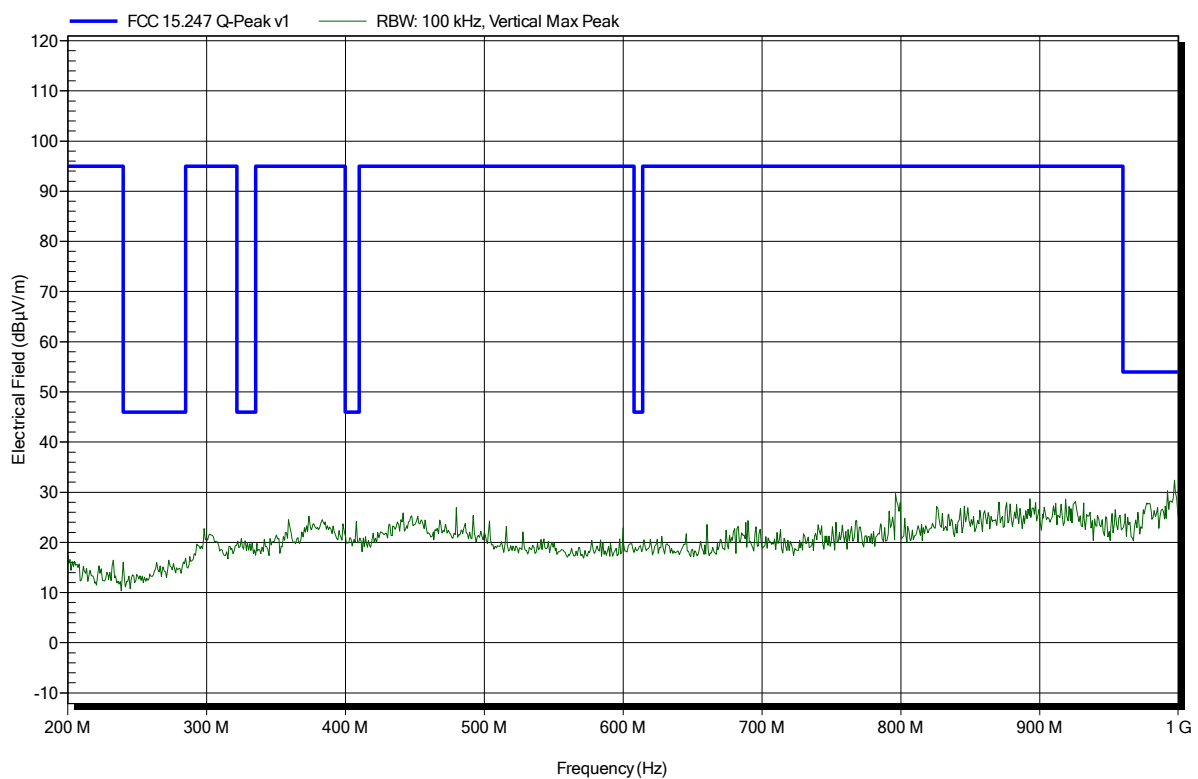

Spurious emissions according to FCC 15.247

Project number: G0M-1807-7540

Applicant: Leica Geosystems AG

EUT Name: TiWi BT/WLAN Evaluation Board

Model: TiWi BT/WLAN Evaluation Board

Test Site: Eurofins Product Service GmbH

Operator: Sebastian Suckow

Test Conditions: Tnom: 24°C, Vnom: 7.0 VDC

Antenna: Schwarzbeck BBHA 9120D, Horizontal


Measurement distance: 1 m converted to 3m

Mode: TX; IEEE 802.11n HT20 WLAN MCS0 2462 MHz

Test Date: 2018-07-18

Note:

Index 36

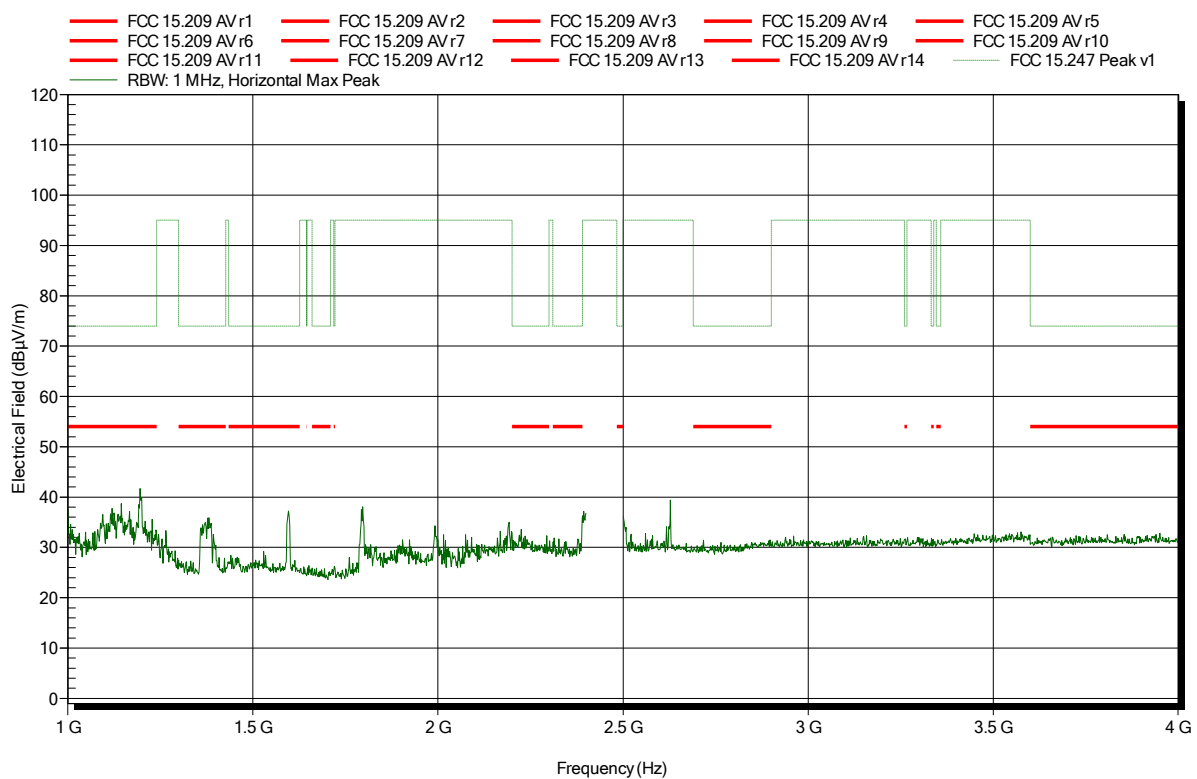

Spurious emissions according to FCC 15.247

Project number: G0M-1807-7540

Applicant: Leica Geosystems AG

EUT Name: TiWi BT/WLAN Evaluation Board

Model: TiWi BT/WLAN Evaluation Board

Test Site: Eurofins Product Service GmbH

Operator: Sebastian Suckow

Test Conditions: Tnom: 24°C, Vnom: 7.0 VDC

Antenna: Schwarzbeck BBHA 9120D, Vertical


Measurement distance: 1 m converted to 3m

Mode: TX; IEEE 802.11n HT20 WLAN MCS0 2462 MHz

Test Date: 2018-07-18

Note:

Index 43

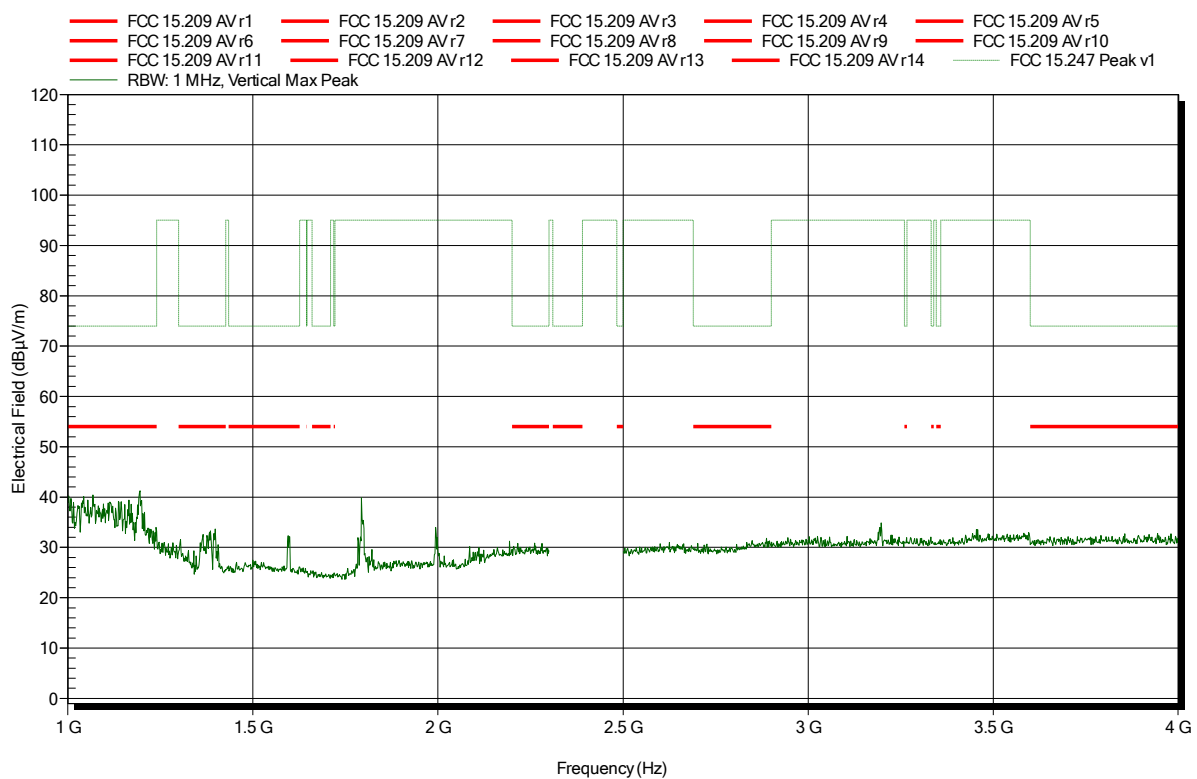


Spurious emissions according to FCC 15.247

Project number: G0M-1807-7540

Applicant: Leica Geosystems AG
EUT Name: TiWi BT/WLAN Evaluation Board
Model: TiWi BT/WLAN Evaluation Board
Test Site: Eurofins Product Service GmbH
Operator: Sebastian Suckow
Test Conditions: Tnom: 24°C, Vnom: 7.0 VDC
Antenna: Schwarzbeck BBHA 9120D, Horizontal
Measurement distance: 1 m converted to 3m
Mode: TX; IEEE 802.11n HT20 WLAN MCS0 2462 MHz
Test Date: 2018-07-18
Note: lower bandedge

Index 38

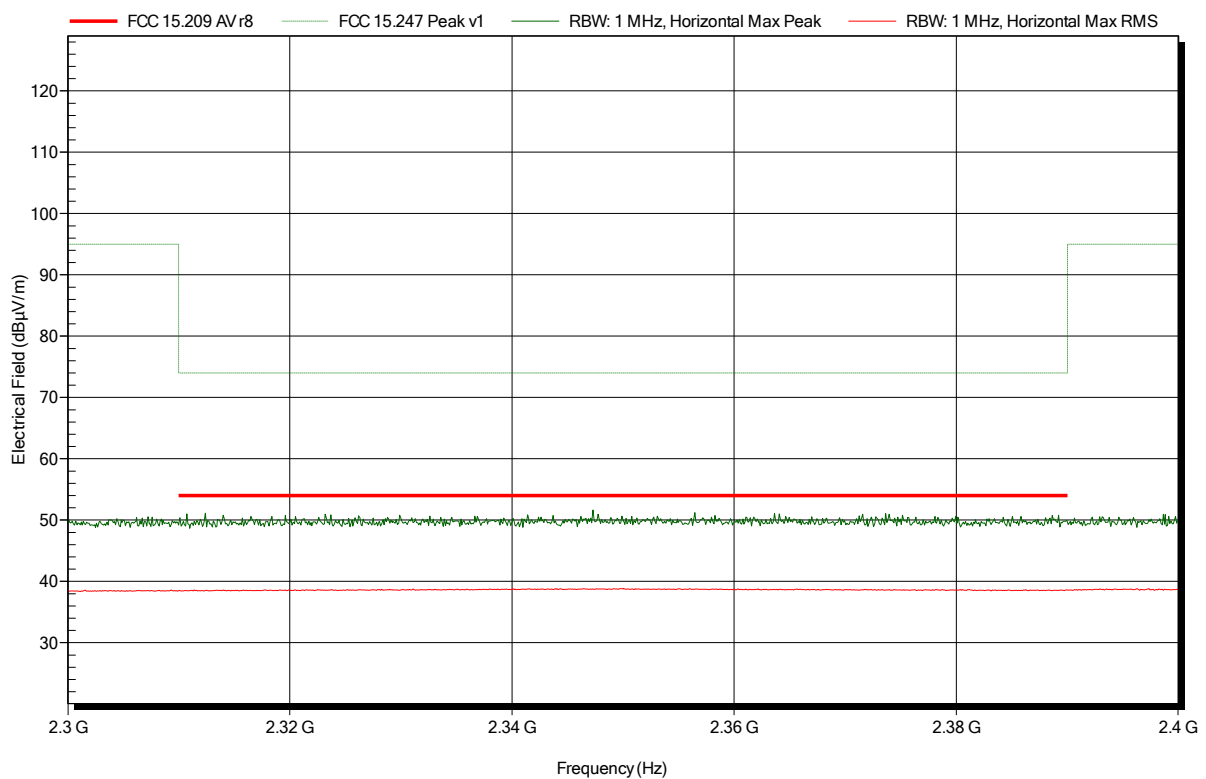


Spurious emissions according to FCC 15.247

Project number: G0M-1807-7540

Applicant: Leica Geosystems AG
 EUT Name: TiWi BT/WLAN Evaluation Board
 Model: TiWi BT/WLAN Evaluation Board
 Test Site: Eurofins Product Service GmbH
 Operator: Sebastian Suckow
 Test Conditions: Tnom: 24°C, Vnom: 7.0 VDC
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; IEEE 802.11n HT20 WLAN MCS0 2462 MHz
 Test Date: 2018-07-18
 Note: upper bandedge

Index 37

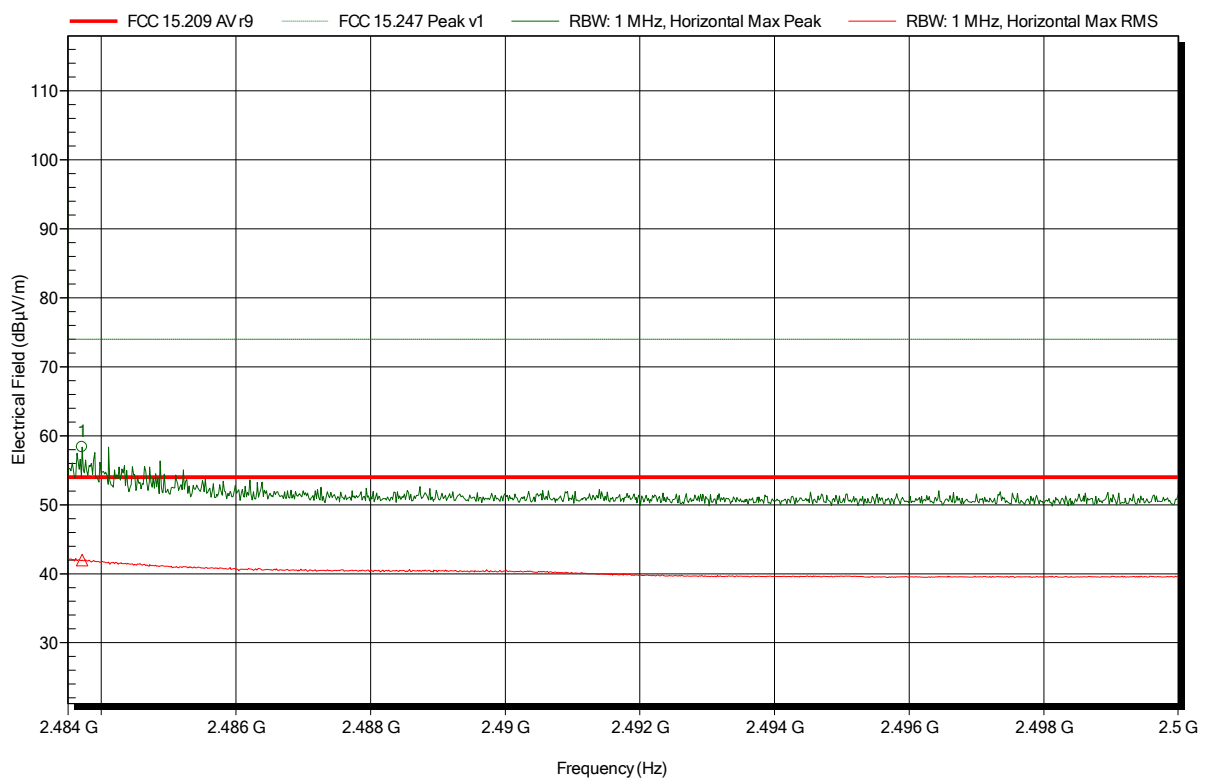


Frequency	Peak	Peak Limit	Peak Difference	Peak Status
2.4837 GHz	58.35 dBµV/m	74 dBµV/m	-15.65 dB	Pass
Frequency	RMS	RMS Limit	RMS Difference	RMS Status
2.4837 GHz	41.97 dBµV/m	54 dBµV/m	-12.03 dB	Pass

Spurious emissions according to FCC 15.247

Project number: G0M-1807-7540

Applicant: Leica Geosystems AG
 EUT Name: TiWi BT/WLAN Evaluation Board
 Model: TiWi BT/WLAN Evaluation Board
 Test Site: Eurofins Product Service GmbH
 Operator: Sebastian Suckow
 Test Conditions: Tnom: 24°C, Vnom: 7.0 VDC
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; IEEE 802.11n HT20 WLAN MCS0 2462 MHz
 Test Date: 2018-07-18
 Note:

Index 39

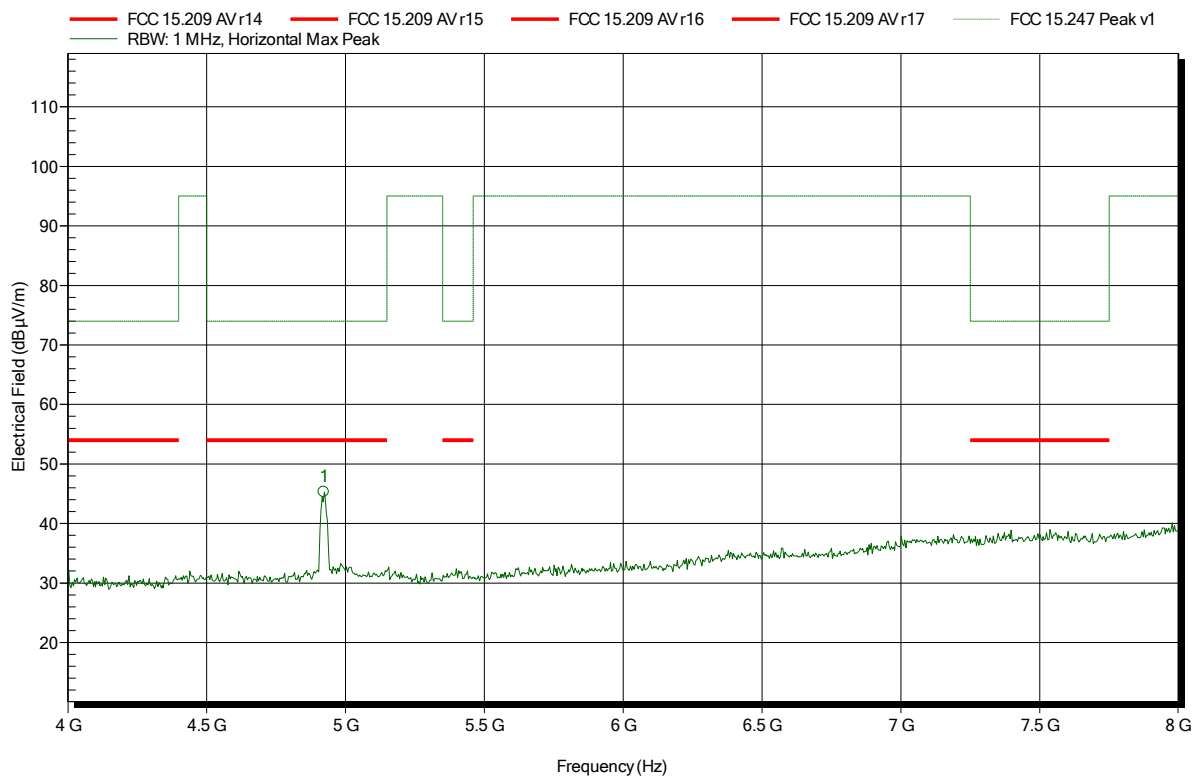


Frequency	Peak	Peak Limit	Peak Difference	Peak Status
4.923 GHz	45.31 dBµV/m	74 dBµV/m	-28.69 dB	Pass

Spurious emissions according to FCC 15.247

Project number: G0M-1807-7540

Applicant: Leica Geosystems AG
 EUT Name: TiWi BT/WLAN Evaluation Board
 Model: TiWi BT/WLAN Evaluation Board
 Test Site: Eurofins Product Service GmbH
 Operator: Sebastian Suckow
 Test Conditions: Tnom: 24°C, Vnom: 7.0 VDC
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: TX; IEEE 802.11n HT20 WLAN MCS0 2462 MHz
 Test Date: 2018-07-18
 Note:

Index 42

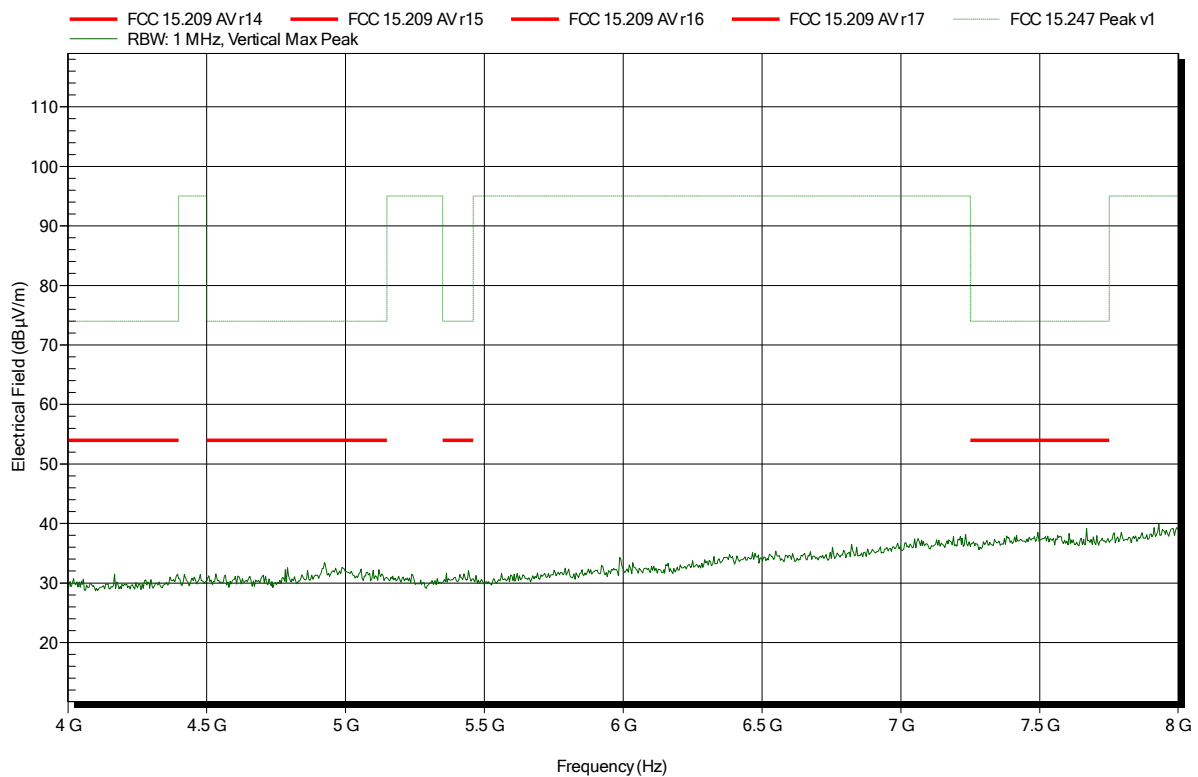

Spurious emissions according to FCC 15.247

Project number: G0M-1807-7540

Applicant: Leica Geosystems AG

EUT Name: TiWi BT/WLAN Evaluation Board

Model: TiWi BT/WLAN Evaluation Board

Test Site: Eurofins Product Service GmbH

Operator: Sebastian Suckow

Test Conditions: Tnom: 24°C, Vnom: 7.0 VDC

Antenna: Schwarzbeck BBHA 9120D, Horizontal


Measurement distance: 1 m converted to 3m

Mode: TX; IEEE 802.11n HT20 WLAN MCS0 2462 MHz

Test Date: 2018-07-18

Note:

Index 40

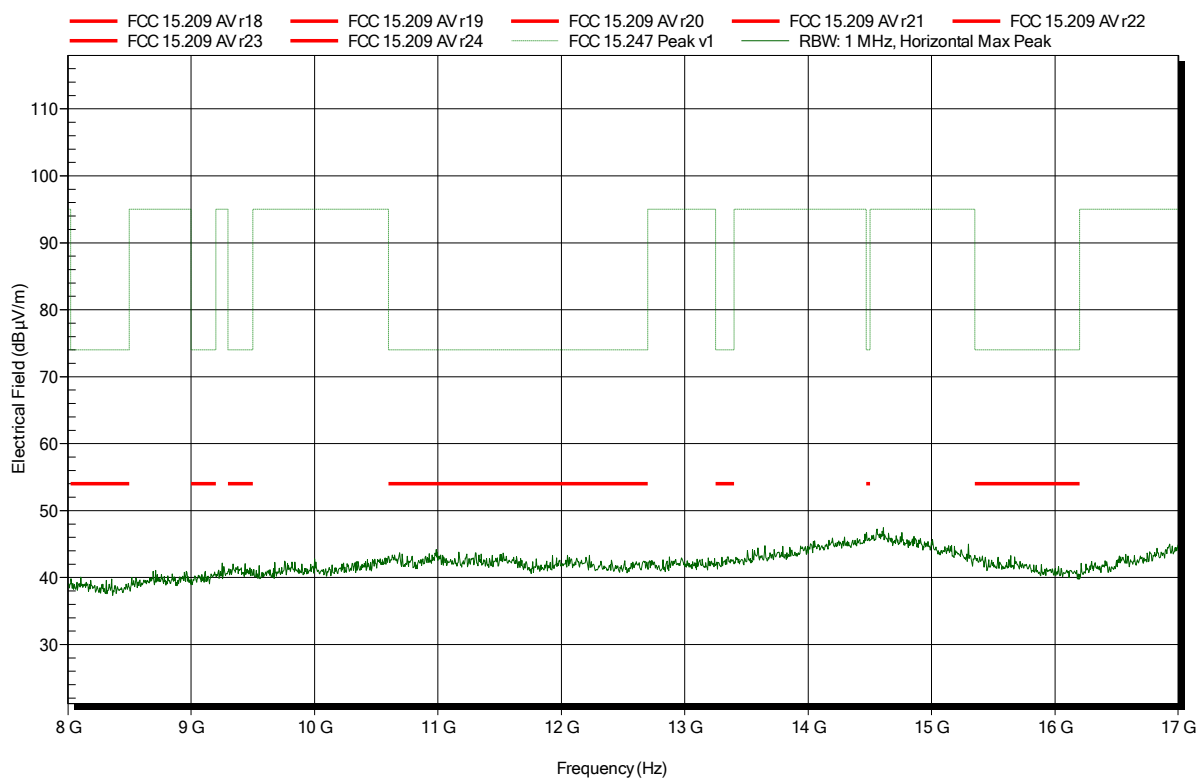


Spurious emissions according to FCC 15.247

Project number: G0M-1807-7540

Applicant: Leica Geosystems AG
EUT Name: TiWi BT/WLAN Evaluation Board
Model: TiWi BT/WLAN Evaluation Board
Test Site: Eurofins Product Service GmbH
Operator: Sebastian Suckow
Test Conditions: Tnom: 24°C, Vnom: 7.0 VDC
Antenna: Schwarzbeck BBHA 9120D, Vertical
Measurement distance: 1 m converted to 3m
Mode: TX; IEEE 802.11n HT20 WLAN MCS0 2462 MHz
Test Date: 2018-07-18
Note:

Index 41

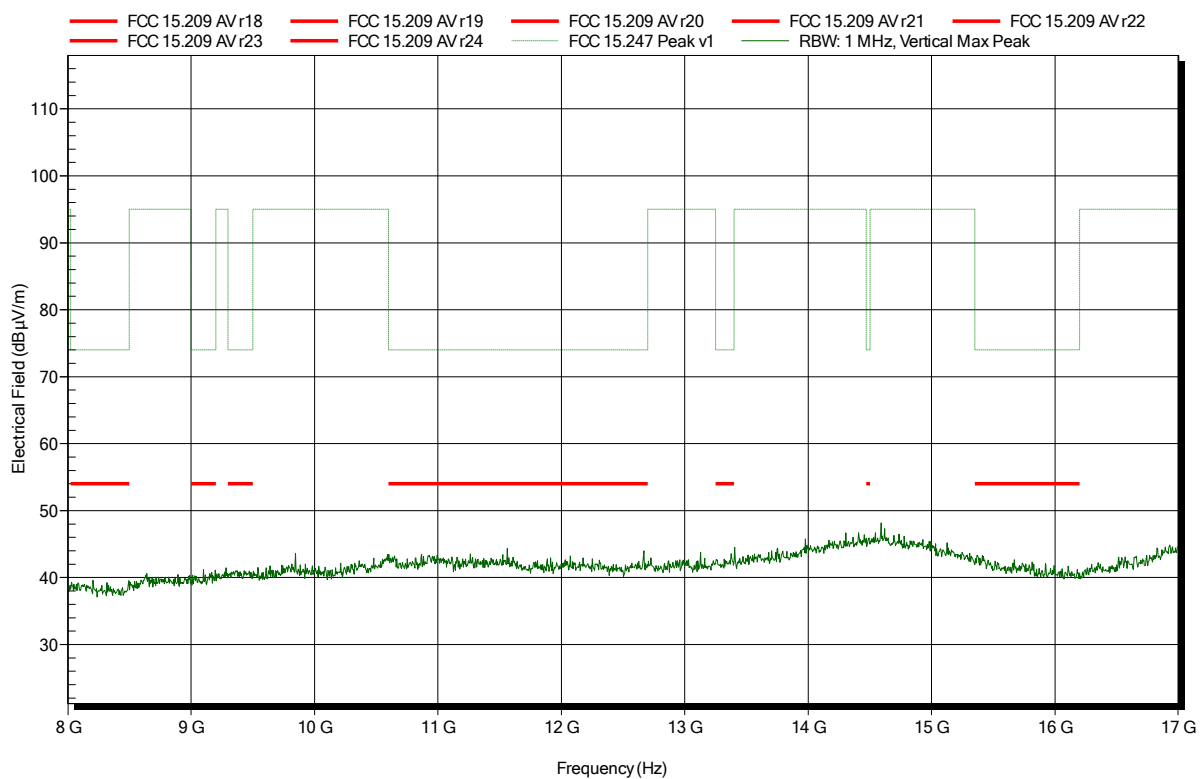


Spurious emissions according to FCC 15.247

Project number: G0M-1807-7540

Applicant: Leica Geosystems AG
EUT Name: TiWi BT/WLAN Evaluation Board
Model: TiWi BT/WLAN Evaluation Board
Test Site: Eurofins Product Service GmbH
Operator: Sebastian Suckow
Test Conditions: Tnom: 24°C, Vnom: 7.0 VDC
Antenna: Amplifier Research AT 4560 (old name) / ATH18G40 (new name),
Horizontal
Measurement distance: 1 m converted to 3m
Mode: TX; IEEE 802.11n HT20 WLAN MCS0 2462 MHz
Test Date: 2018-07-18
Note:

Index 44

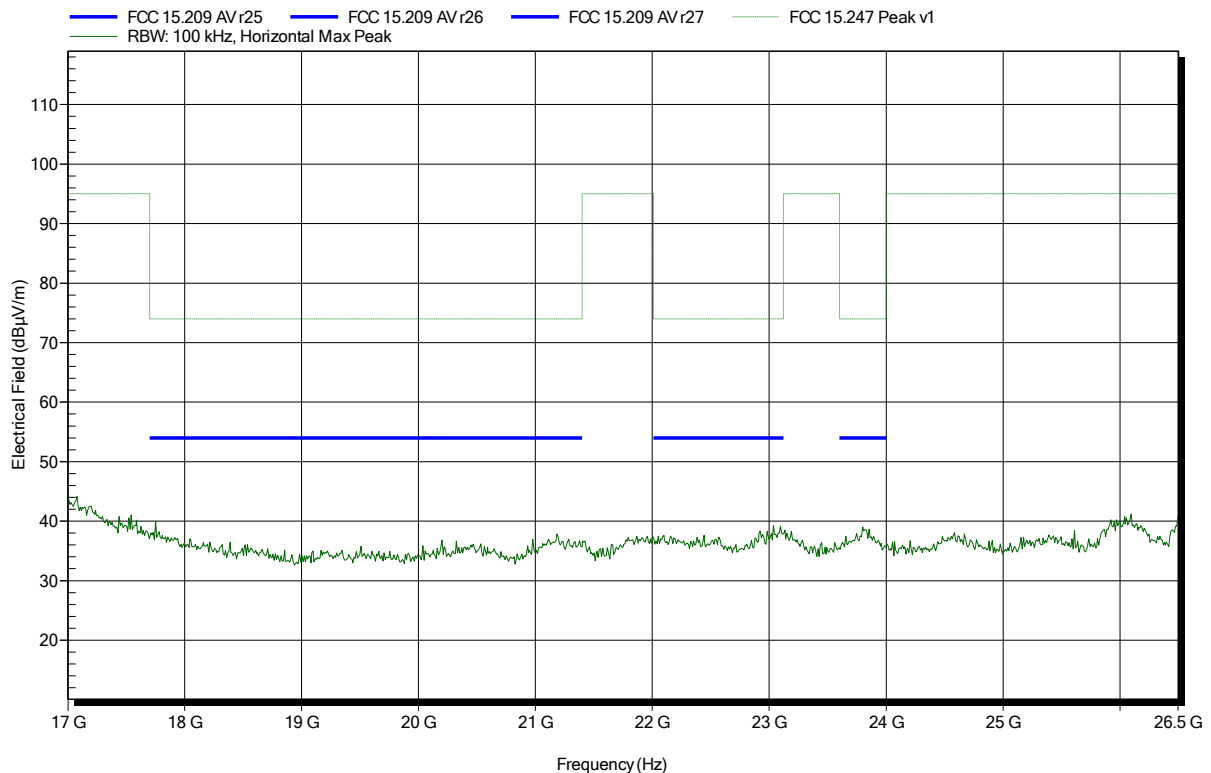


Spurious emissions according to FCC 15.247

Project number: G0M-1807-7540

Applicant: Leica Geosystems AG
EUT Name: TiWi BT/WLAN Evaluation Board
Model: TiWi BT/WLAN Evaluation Board
Test Site: Eurofins Product Service GmbH
Operator: Sebastian Suckow
Test Conditions: Tnom: 24°C, Vnom: 7.0 VDC
Antenna: Amplifier Research AT 4560 (old name) / ATH18G40 (new name),
Vertical
Measurement distance: 1 m converted to 3m
Mode: TX; IEEE 802.11n HT20 WLAN MCS0 2462 MHz
Test Date: 2018-07-18
Note:

Index 45

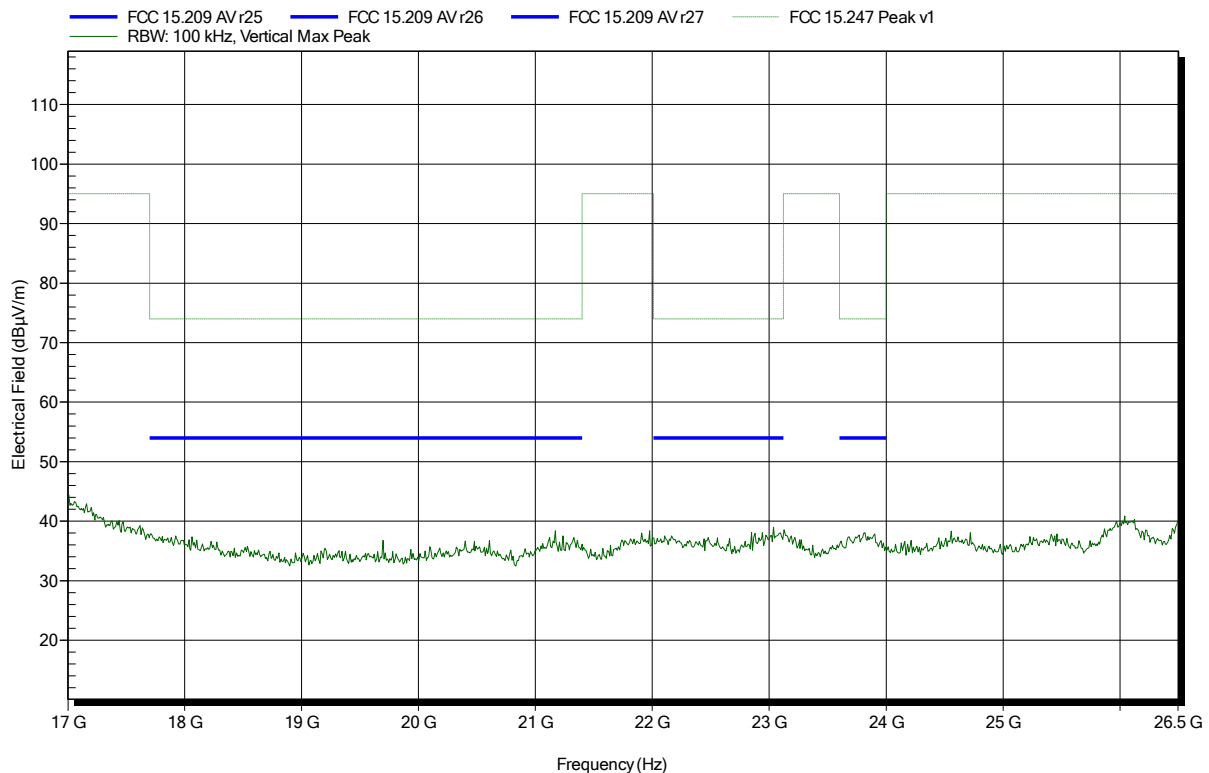


ANNEX B Receiver spurious emissions

Spurious emissions according to FCC 15.247

Project number: G0M-1807-7540

Applicant: Leica Geosystems AG
 EUT Name: TiWi BT/WLAN Evaluation Board
 Model: TiWi BT/WLAN Evaluation Board
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Suckow
 Test Conditions: Tnom: 22°C, Vnom: 7.0 VDC
 Antenna: Rohde & Schwarz HK 116, Horizontal
 Measurement distance: 3 m
 Mode: RX; IEEE 802.11n HT20 WLAN MCS0 2437 MHz
 Test Date: 2018-07-20
 Note:

Index 17

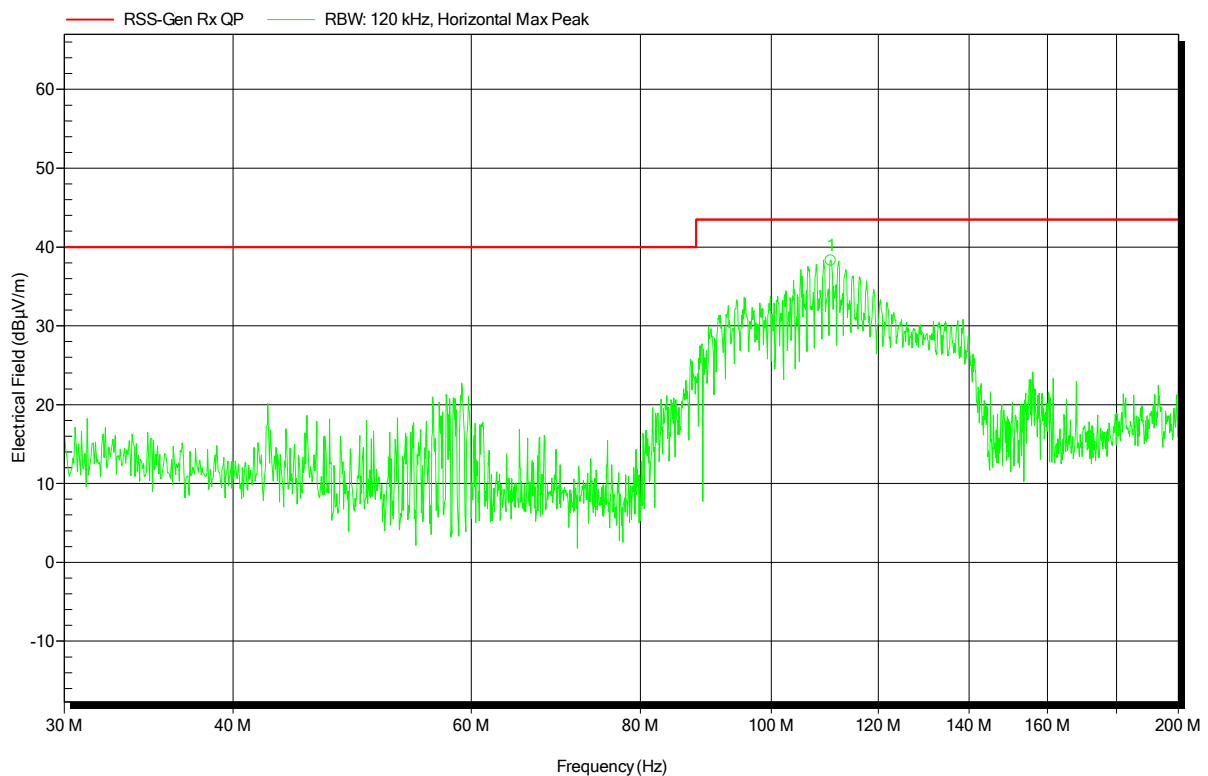

Frequency	Peak	Peak Limit	Peak Difference	Status	Angle	Height
110.6458 MHz	38.3 dBµV/m	43.5 dBµV/m	-5.25 dB	Pass	0 Degree	1 m


Frequency	Angle	Height
110.6458 MHz	0 Degree	1 m

Spurious emissions according to FCC 15.247

Project number: G0M-1807-7540

Applicant: Leica Geosystems AG
 EUT Name: TiWi BT/WLAN Evaluation Board
 Model: TiWi BT/WLAN Evaluation Board
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Suckow
 Test Conditions: Tnom: 22°C, Vnom: 7.0 VDC
 Antenna: Rohde & Schwarz HK 116, Vertical
 Measurement distance: 3 m
 Mode: RX; IEEE 802.11n HT20 WLAN MCS0 2437 MHz
 Test Date: 2018-07-20
 Note:

Index 18

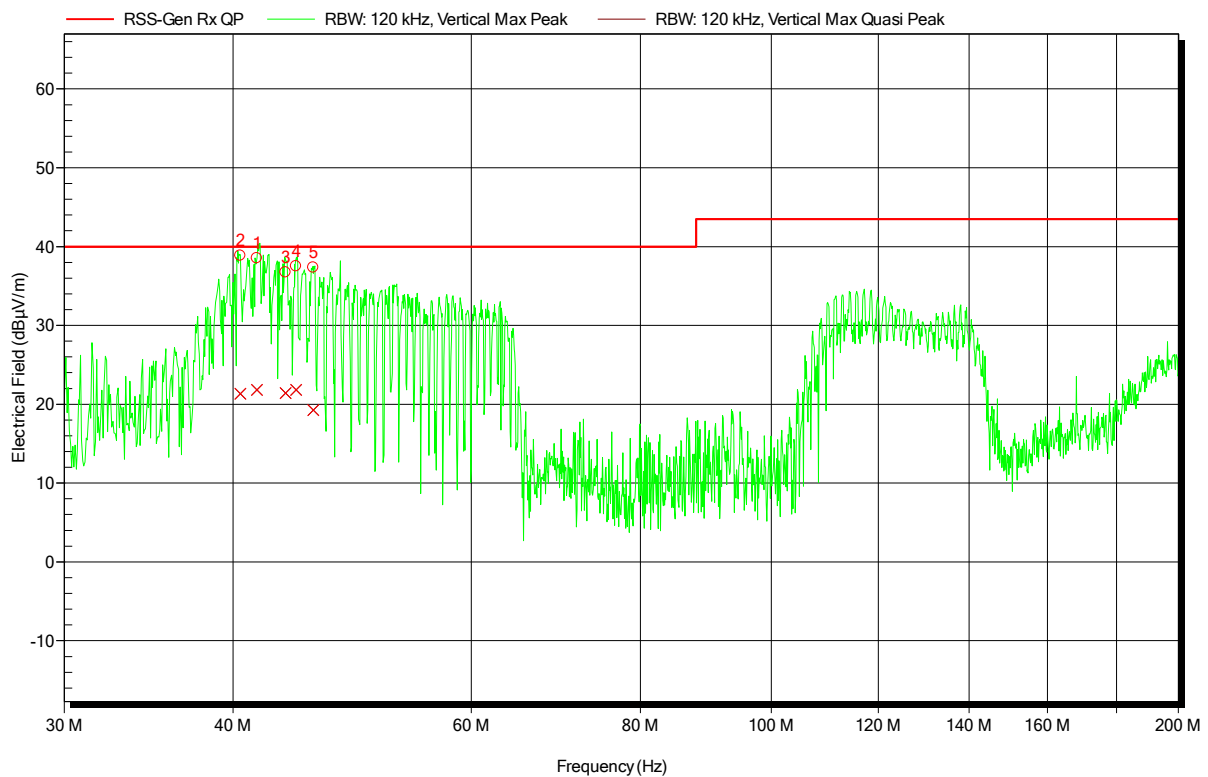


Frequency	Quasi-Peak	Quasi-Peak Limit	Quasi-Peak Difference	Quasi-Peak Status	Angle	Height
40.5086 MHz	21.3 dBµV/m	40 dBµV/m	-18.68 dB	Pass	0 Degree	1 m
41.6495 MHz	21.8 dBµV/m	40 dBµV/m	-18.19 dB	Pass	0 Degree	1 m
43.7512 MHz	21.4 dBµV/m	40 dBµV/m	-18.6 dB	Pass	0 Degree	1 m
44.5319 MHz	21.8 dBµV/m	40 dBµV/m	-18.18 dB	Pass	0 Degree	1 m
45.8529 MHz	19.3 dBµV/m	40 dBµV/m	-20.74 dB	Pass	0 Degree	1 m

Spurious emissions according to FCC 15.247

Project number: G0M-1807-7540

Applicant: Leica Geosystems AG
 EUT Name: TiWi BT/WLAN Evaluation Board
 Model: TiWi BT/WLAN Evaluation Board
 Test Site: Eurofins Product Service GmbH
 Operator: Sebastian Suckow
 Test Conditions: Tnom: 24°C, Vnom: 7.0 VDC
 Antenna: Rohde & Schwarz HL 223, Horizontal
 Measurement distance: 3 m
 Mode: RX; WLAN 2437 MHz
 Test Date: 2018-07-18
 Note:

Index 57

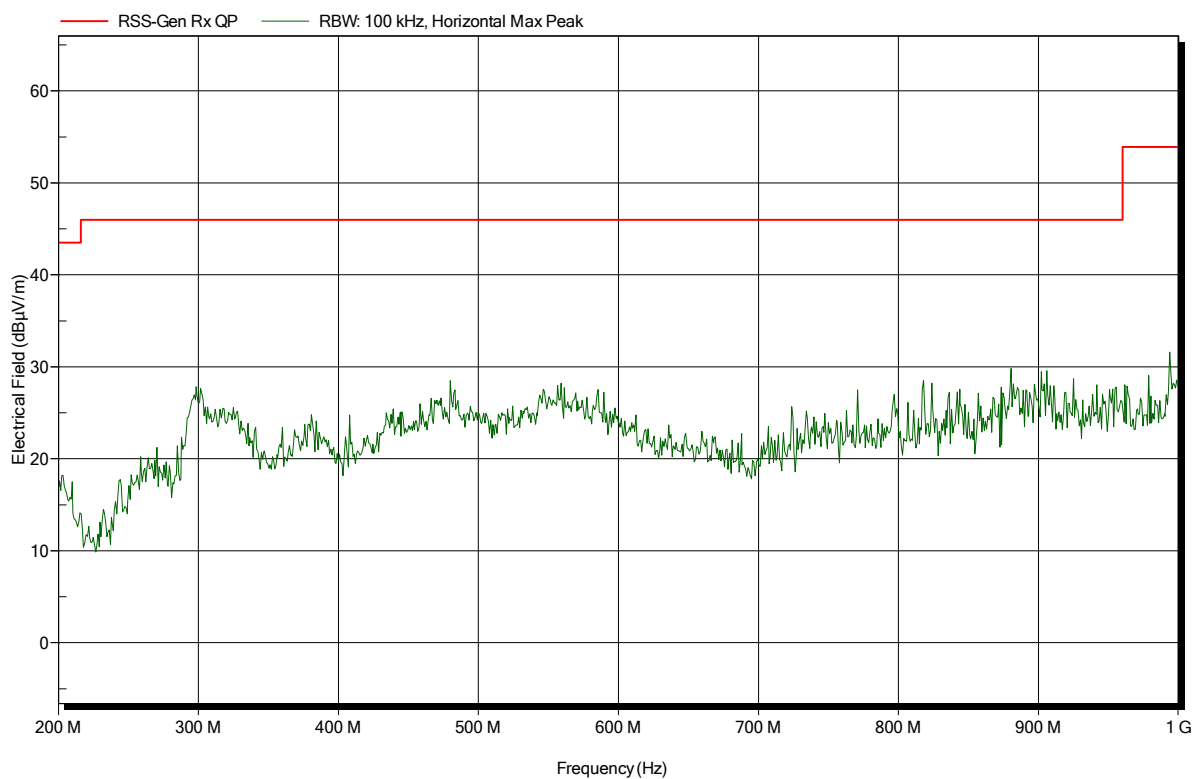


Spurious emissions according to FCC 15.247

Project number: G0M-1807-7540

Applicant: Leica Geosystems AG
 EUT Name: TiWi BT/WLAN Evaluation Board
 Model: TiWi BT/WLAN Evaluation Board
 Test Site: Eurofins Product Service GmbH
 Operator: Sebastian Suckow
 Test Conditions: Tnom: 24°C, Vnom: 7.0 VDC
 Antenna: Rohde & Schwarz HL 223, Vertical
 Measurement distance: 3 m
 Mode: RX; WLAN 2437 MHz
 Test Date: 2018-07-18
 Note:

Index 58

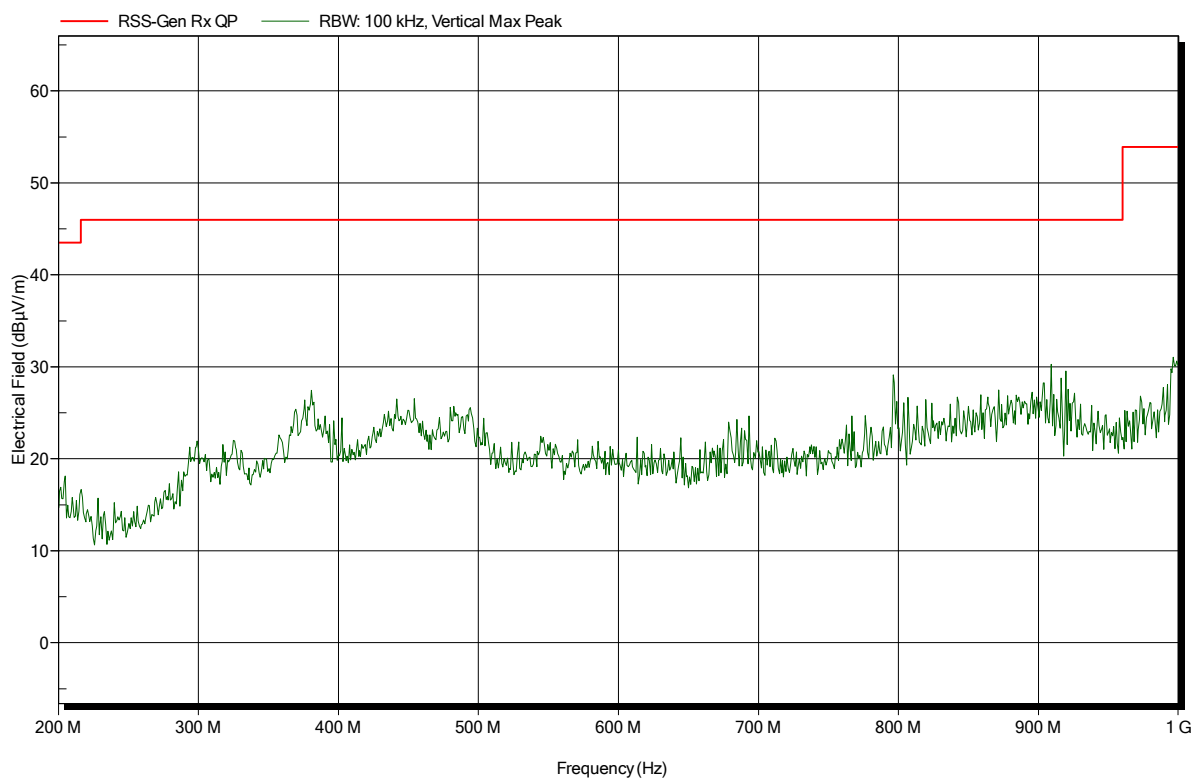


Spurious emissions according to FCC 15.247

Project number: G0M-1807-7540

Applicant: Leica Geosystems AG
 EUT Name: TiWi BT/WLAN Evaluation Board
 Model: TiWi BT/WLAN Evaluation Board
 Test Site: Eurofins Product Service GmbH
 Operator: Sebastian Suckow
 Test Conditions: Tnom: 24°C, Vnom: 7.0 VDC
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 3 m
 Mode: RX; WLAN 2437 MHz
 Test Date: 2018-07-18
 Note:

Index 59

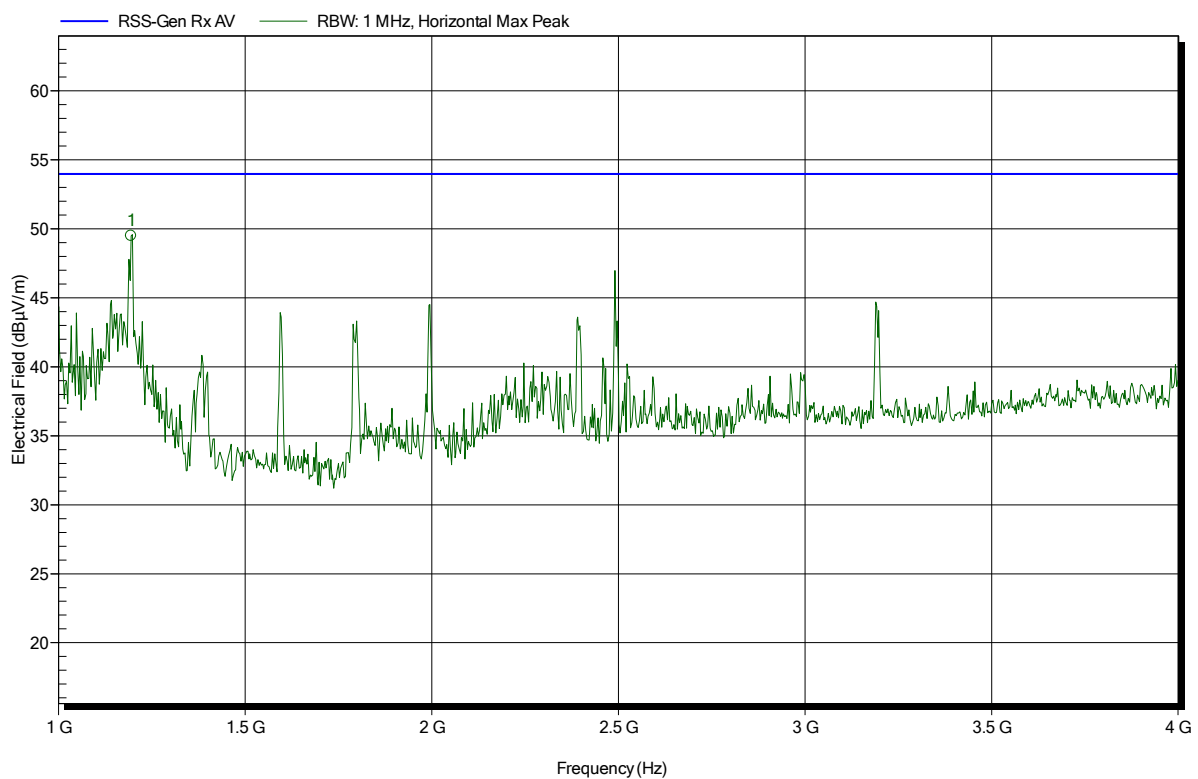


Frequency	Peak	Peak Limit	Peak Difference	Peak Status
1.195 GHz	49.5 dBµV/m	53.98 dBµV/m	-4.48 dB	Pass

Spurious emissions according to FCC 15.247

Project number: G0M-1807-7540

Applicant: Leica Geosystems AG
 EUT Name: TiWi BT/WLAN Evaluation Board
 Model: TiWi BT/WLAN Evaluation Board
 Test Site: Eurofins Product Service GmbH
 Operator: Sebastian Suckow
 Test Conditions: Tnom: 24°C, Vnom: 7.0 VDC
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 3 m
 Mode: RX; WLAN 2437 MHz
 Test Date: 2018-07-18
 Note:

Index 62

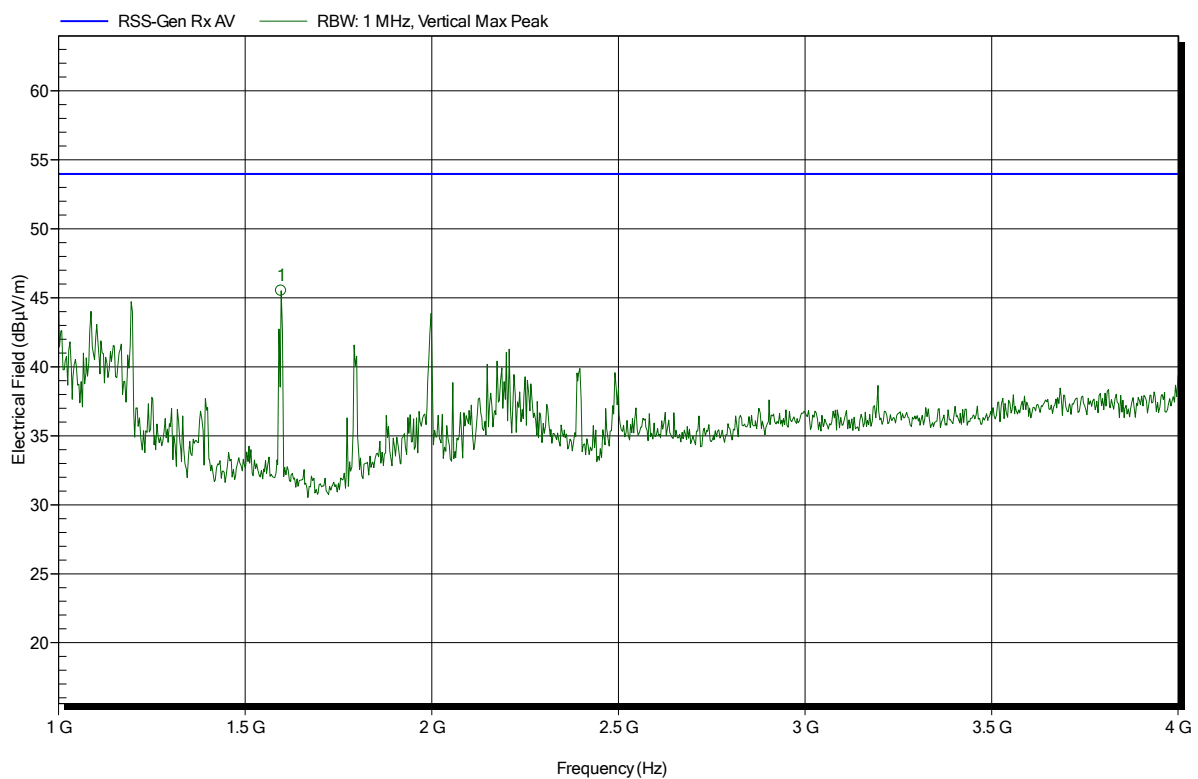


Frequency	Peak	Peak Limit	Peak Difference	Peak Status
1.596 GHz	45.51 dBµV/m	53.98 dBµV/m	-8.47 dB	Pass

Spurious emissions according to FCC 15.247

Project number: G0M-1807-7540

Applicant: Leica Geosystems AG
 EUT Name: TiWi BT/WLAN Evaluation Board
 Model: TiWi BT/WLAN Evaluation Board
 Test Site: Eurofins Product Service GmbH
 Operator: Sebastian Suckow
 Test Conditions: Tnom: 24°C, Vnom: 7.0 VDC
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 3 m
 Mode: RX; WLAN 2437 MHz
 Test Date: 2018-07-18
 Note:

Index 60

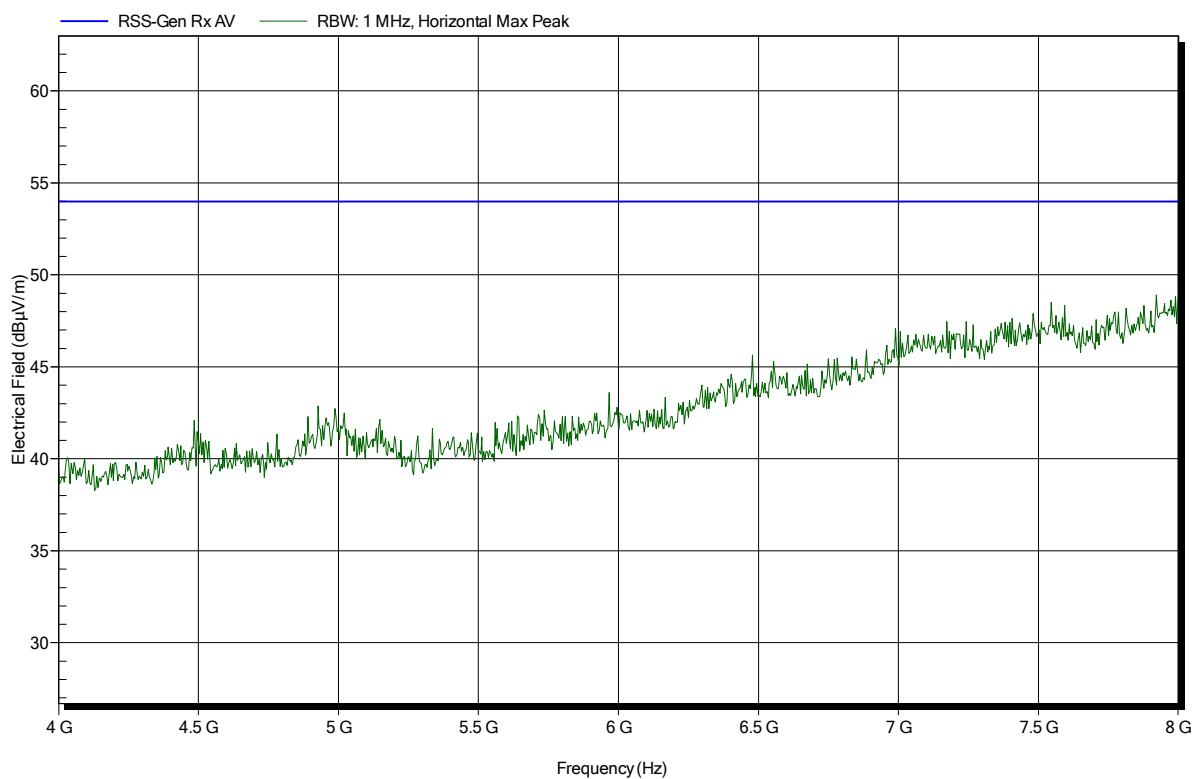


Spurious emissions according to FCC 15.247

Project number: G0M-1807-7540

Applicant: Leica Geosystems AG
EUT Name: TiWi BT/WLAN Evaluation Board
Model: TiWi BT/WLAN Evaluation Board
Test Site: Eurofins Product Service GmbH
Operator: Sebastian Suckow
Test Conditions: Tnom: 24°C, Vnom: 7.0 VDC
Antenna: Schwarzbeck BBHA 9120D, Vertical
Measurement distance: 3 m
Mode: RX; WLAN 2437 MHz
Test Date: 2018-07-18
Note:

Index 61

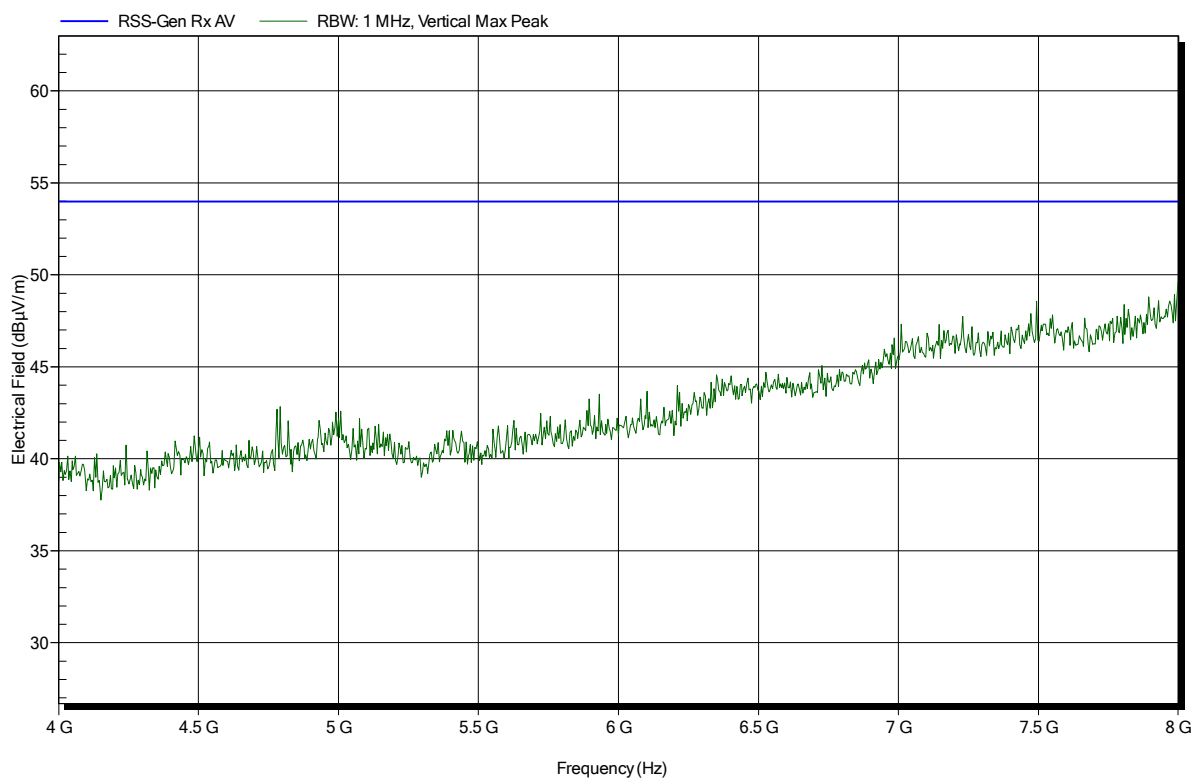


Spurious emissions according to FCC 15.247

Project number: G0M-1807-7540

Applicant: Leica Geosystems AG
 EUT Name: TiWi BT/WLAN Evaluation Board
 Model: TiWi BT/WLAN Evaluation Board
 Test Site: Eurofins Product Service GmbH
 Operator: Sebastian Suckow
 Test Conditions: Tnom: 24°C, Vnom: 7.0 VDC
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: RX; WLAN 2437 MHz
 Test Date: 2018-07-18
 Note:

Index 64

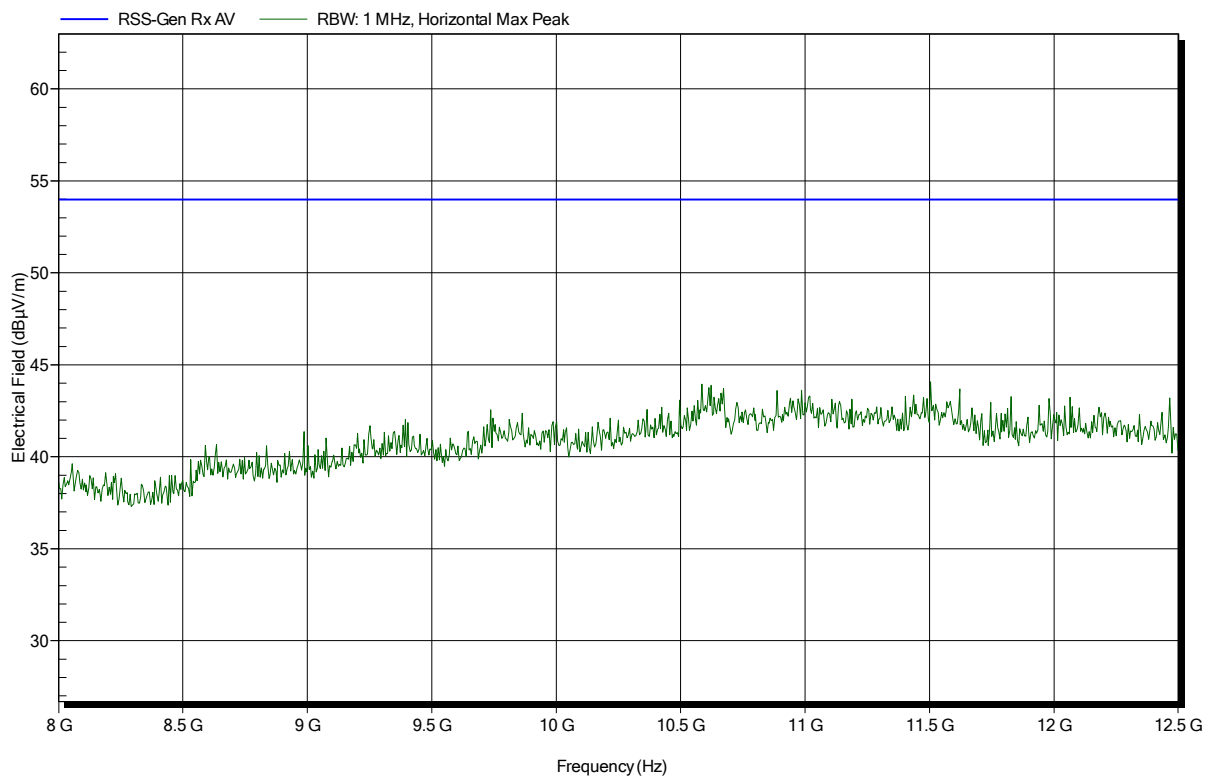

Spurious emissions according to FCC 15.247

Project number: G0M-1807-7540

Applicant: Leica Geosystems AG
EUT Name: TiWi BT/WLAN Evaluation Board
Model: TiWi BT/WLAN Evaluation Board
Test Site: Eurofins Product Service GmbH
Operator: Sebastian Suckow
Test Conditions: Tnom: 24°C, Vnom: 7.0 VDC
Antenna: Schwarzbeck BBHA 9120D, Vertical
Measurement distance: 1 m converted to 3m
Mode: RX; WLAN 2437 MHz
Test Date: 2018-07-18
Note:

Index 63

