



Appendix A. Test Result of AC Power Line Conducted Emission

POCm-W24CR-RPL:

[125 kHz]

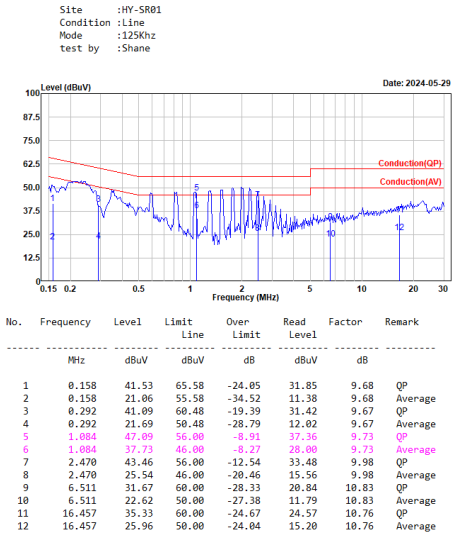


Note:  
1. Level = Read Level + Factor  
2. Factor = LISN insertion loss + Cable loss  
3. Over Limit = Level - Limit Line

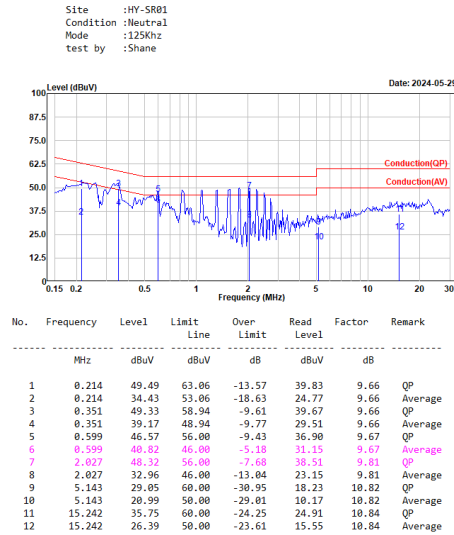


Note:  
1. Level = Read Level + Factor  
2. Factor = LISN insertion loss + Cable loss  
3. Over Limit = Level - Limit Line

[13.56 MHz]

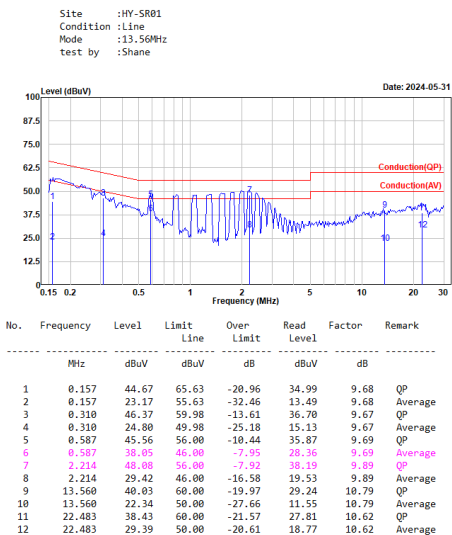


Note:  
1. Level = Read Level + Factor  
2. Factor = LISN insertion loss + Cable loss  
3. Over Limit = Level - Limit Line

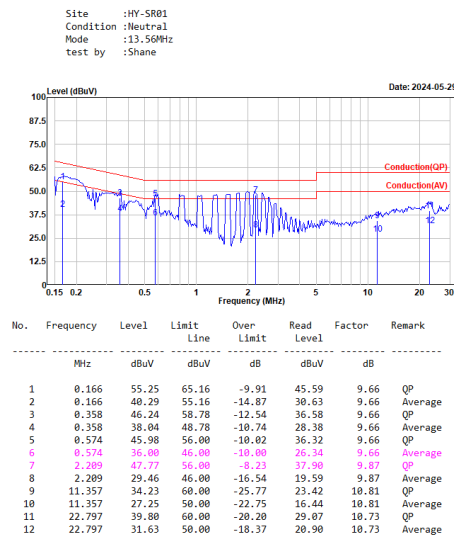

Note:  
1. Level = Read Level + Factor  
2. Factor = LISN insertion loss + Cable loss  
3. Over Limit = Level - Limit Line

Appendix B. Test Result of Emission Bandwidth

| Frequency | Measurement Level<br>(kHz) | Required Limit<br>(MHz) | Result |
|-----------|----------------------------|-------------------------|--------|
| 125 kHz   | 26.733                     | --                      | --     |
| 13.56 MHz | 24.75                      | --                      | --     |

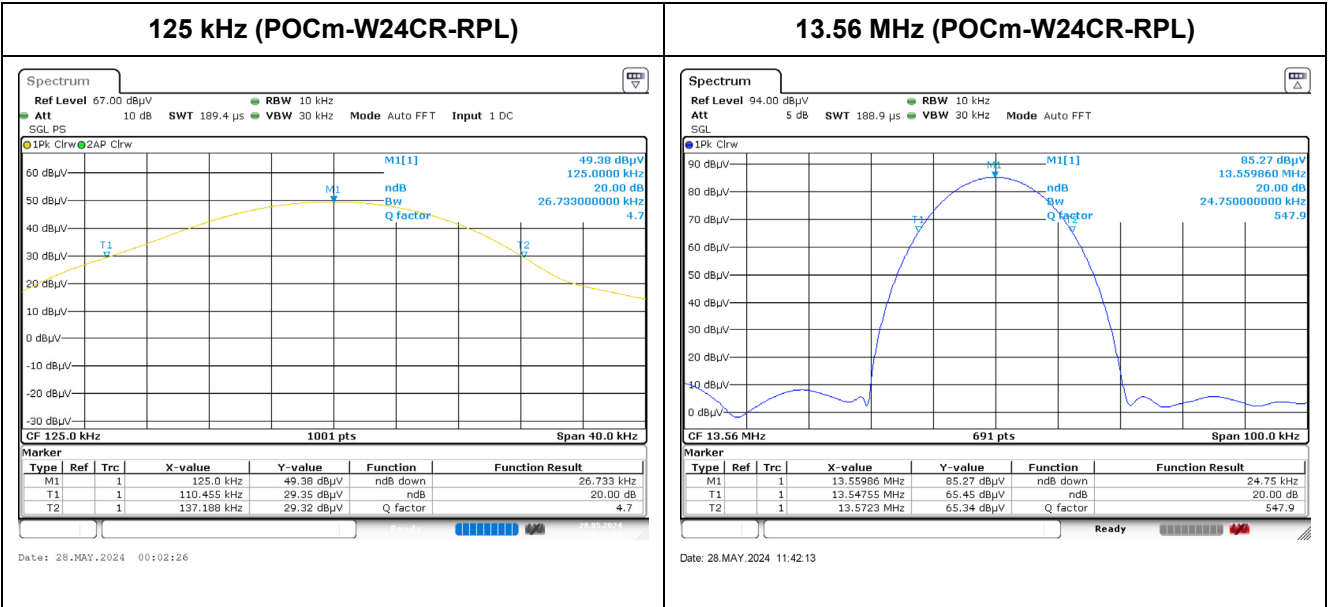

### Appendix C. Test Result of Frequency Stability


| Temperature<br>(°C) | Voltage<br>(V) | Observe Time | Declared<br>Frequency<br>(MHz) | Read<br>Frequency<br>(MHz) | Tolerance<br>(%) | Limit<br>(%) |
|---------------------|----------------|--------------|--------------------------------|----------------------------|------------------|--------------|
| 20                  | 120            | start        | 13.56                          | 13.55996                   | -0.000272        | ± 0.01 %     |
|                     |                | 2mins        | 13.56                          | 13.55996                   | -0.000270        |              |
|                     |                | 5mins        | 13.56                          | 13.55996                   | -0.000273        |              |
|                     |                | 10mins       | 13.56                          | 13.55996                   | -0.000264        |              |
| 20                  | 138            | start        | 13.56                          | 13.55996                   | -0.000265        | ± 0.01 %     |
|                     |                | 2mins        | 13.56                          | 13.55996                   | -0.000262        |              |
|                     |                | 5mins        | 13.56                          | 13.55996                   | -0.000260        |              |
|                     |                | 10mins       | 13.56                          | 13.55997                   | -0.000257        |              |
| 20                  | 102            | start        | 13.56                          | 13.55996                   | -0.000320        | ± 0.01 %     |
|                     |                | 2mins        | 13.56                          | 13.55996                   | -0.000324        |              |
|                     |                | 5mins        | 13.56                          | 13.55996                   | -0.000317        |              |
|                     |                | 10mins       | 13.56                          | 13.55996                   | -0.000322        |              |
| 50                  | 120            | start        | 13.56                          | 13.55993                   | -0.000486        | ± 0.01 %     |
|                     |                | 2mins        | 13.56                          | 13.55991                   | -0.000633        |              |
|                     |                | 5mins        | 13.56                          | 13.55993                   | -0.000552        |              |
|                     |                | 10mins       | 13.56                          | 13.55993                   | -0.000482        |              |
| 40                  | 120            | start        | 13.56                          | 13.55993                   | -0.000487        | ± 0.01 %     |
|                     |                | 2mins        | 13.56                          | 13.55994                   | -0.000473        |              |
|                     |                | 5mins        | 13.56                          | 13.55994                   | -0.000475        |              |
|                     |                | 10mins       | 13.56                          | 13.55993                   | -0.000480        |              |
| 30                  | 120            | start        | 13.56                          | 13.55995                   | -0.000339        | ± 0.01 %     |
|                     |                | 2mins        | 13.56                          | 13.55996                   | -0.000332        |              |
|                     |                | 5mins        | 13.56                          | 13.55995                   | -0.000334        |              |
|                     |                | 10mins       | 13.56                          | 13.55995                   | -0.000340        |              |

|     |     |        |       |          |           |          |
|-----|-----|--------|-------|----------|-----------|----------|
| 10  | 120 | start  | 13.56 | 13.55997 | -0.000192 | ± 0.01 % |
|     |     | 2mins  | 13.56 | 13.55997 | -0.000199 |          |
|     |     | 5mins  | 13.56 | 13.55998 | -0.000170 |          |
|     |     | 10mins | 13.56 | 13.55996 | -0.000265 |          |
| 0   | 120 | start  | 13.56 | 13.55999 | -0.000111 | ± 0.01 % |
|     |     | 2mins  | 13.56 | 13.55998 | -0.000133 |          |
|     |     | 5mins  | 13.56 | 13.55998 | -0.000155 |          |
|     |     | 10mins | 13.56 | 13.55999 | -0.000103 |          |
| -10 | 120 | start  | 13.56 | 13.56002 | 0.000162  | ± 0.01 % |
|     |     | 2mins  | 13.56 | 13.56002 | 0.000155  |          |
|     |     | 5mins  | 13.56 | 13.56002 | 0.000170  |          |
|     |     | 10mins | 13.56 | 13.56003 | 0.000229  |          |
| -20 | 120 | start  | 13.56 | 13.56007 | 0.000483  | ± 0.01 % |
|     |     | 2mins  | 13.56 | 13.56007 | 0.000480  |          |
|     |     | 5mins  | 13.56 | 13.56007 | 0.000482  |          |
|     |     | 10mins | 13.56 | 13.56007 | 0.000485  |          |


Appendix D Test Result of Field Strength of Fundamental Emissions and Spectrum Mask

POCm-W24CR-RPL:

[125 kHz]

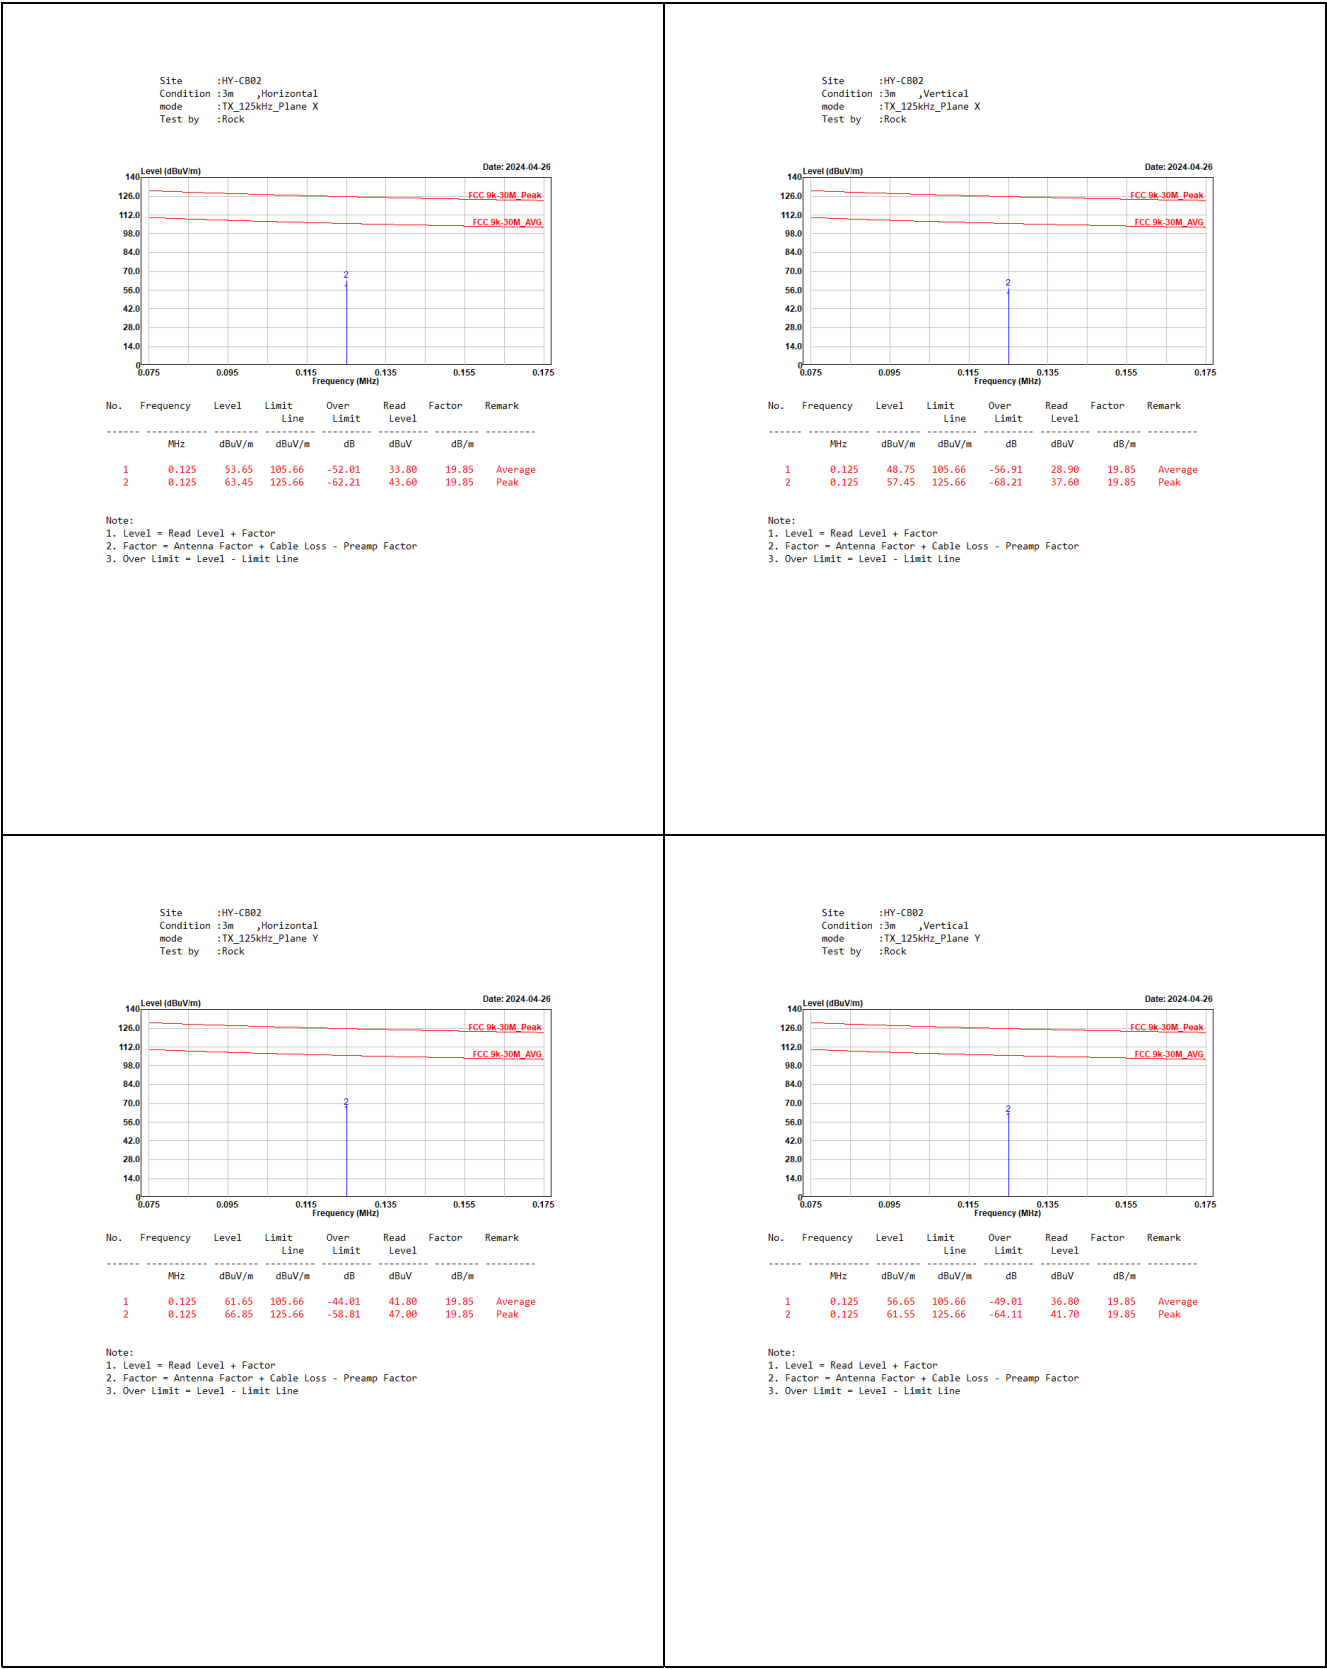


Site :HY-CB02  
Condition :3m ,Horizontal  
mode :TX\_125kHz\_Plane Z  
Test by :Rock

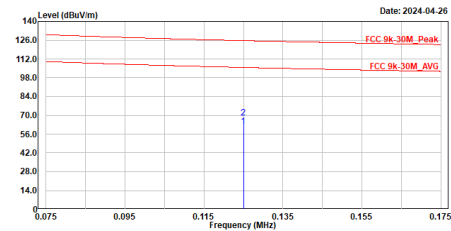

| No. | Frequency | Level  | Limit  | Over   | Read  | Factor | Remark  |
|-----|-----------|--------|--------|--------|-------|--------|---------|
|     | MHz       | dBuV/m | Line   | Limit  | Level |        |         |
| 1   | 0.125     | 61.85  | 105.66 | -43.81 | 42.00 | 19.85  | Average |
| 2   | 0.125     | 68.35  | 125.66 | -57.31 | 48.50 | 19.85  | Peak    |

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line

Site :HY-CB02  
Condition :3m ,Vertical  
mode :TX\_125kHz\_Plane Z  
Test by :Rock

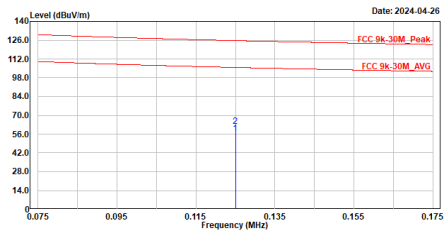


| No. | Frequency | Level  | Limit  | Over   | Read  | Factor | Remark  |
|-----|-----------|--------|--------|--------|-------|--------|---------|
|     | MHz       | dBuV/m | Line   | Limit  | Level |        |         |
| 1   | 0.125     | 56.75  | 105.66 | -48.91 | 36.90 | 19.85  | Average |
| 2   | 0.125     | 61.75  | 125.66 | -63.91 | 41.90 | 19.85  | Peak    |

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line

**[13.56 MHz]**

Site :HY-CB02  
Condition :3m ,Horizontal  
mode :TX\_13.56MHz\_Plane X  
Test by :Rock

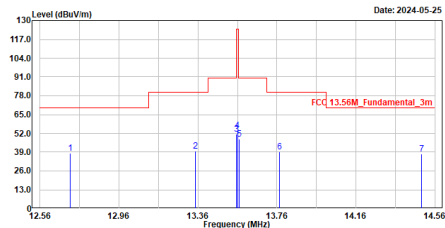


| No. | Frequency | Level  | Limit  | Over   | Read  | Factor | Remark |
|-----|-----------|--------|--------|--------|-------|--------|--------|
|     | MHz       | dBuV/m | Line   | Limit  | Level |        |        |
| 1   | 12.712    | 38.41  | 69.50  | -31.09 | 16.05 | 22.36  | QP     |
| 2   | 13.346    | 39.54  | 80.50  | -40.96 | 17.24 | 22.30  | QP     |
| 3   | 13.553    | 51.58  | 90.47  | -38.89 | 29.28 | 22.30  | QP     |
| 4   | 13.560    | 54.00  | 124.00 | -70.00 | 31.70 | 22.30  | QP     |
| 5   | 13.568    | 48.22  | 90.47  | -42.25 | 25.92 | 22.30  | QP     |
| 6   | 13.772    | 39.13  | 80.50  | -41.37 | 16.83 | 22.30  | QP     |
| 7   | 14.494    | 37.55  | 69.50  | -31.95 | 15.25 | 22.30  | QP     |

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :HY-CB02  
Condition :3m ,Vertical  
mode :TX\_13.56MHz\_Plane X  
Test by :Rock

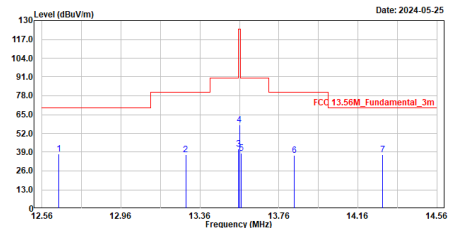


| No. | Frequency | Level  | Limit  | Over   | Read  | Factor | Remark |
|-----|-----------|--------|--------|--------|-------|--------|--------|
|     | MHz       | dBuV/m | Line   | Limit  | Level |        |        |
| 1   | 12.644    | 37.74  | 69.50  | -31.76 | 15.37 | 22.37  | QP     |
| 2   | 13.288    | 37.31  | 80.50  | -43.19 | 15.01 | 22.30  | QP     |
| 3   | 13.553    | 41.01  | 90.47  | -49.46 | 18.71 | 22.30  | QP     |
| 4   | 13.560    | 58.10  | 124.00 | -65.90 | 35.80 | 22.30  | QP     |
| 5   | 13.568    | 38.44  | 90.47  | -52.03 | 16.14 | 22.30  | QP     |
| 6   | 13.838    | 36.60  | 80.50  | -43.90 | 14.30 | 22.30  | QP     |
| 7   | 14.284    | 37.27  | 69.50  | -32.23 | 14.97 | 22.30  | QP     |

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :HY-CB02  
Condition :3m ,Horizontal  
mode :TX\_13.56MHz\_Plane Y  
Test by :Rock

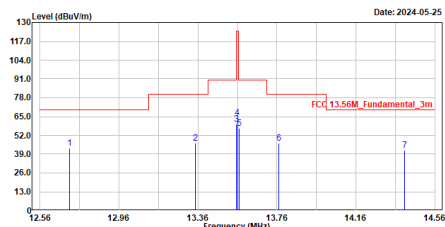


| No. | Frequency | Level  | Limit  | Over   | Read  | Factor | Remark |
|-----|-----------|--------|--------|--------|-------|--------|--------|
|     | MHz       | dBuV/m | Line   | Limit  | Level |        |        |
| 1   | 12.710    | 43.23  | 69.50  | -26.27 | 20.87 | 22.36  | QP     |
| 2   | 13.348    | 46.57  | 80.50  | -33.93 | 24.27 | 22.30  | QP     |
| 3   | 13.553    | 59.76  | 90.47  | -30.71 | 37.46 | 22.30  | QP     |
| 4   | 13.560    | 64.50  | 124.00 | -59.50 | 42.20 | 22.30  | QP     |
| 5   | 13.568    | 56.08  | 90.47  | -33.49 | 34.68 | 22.30  | QP     |
| 6   | 13.770    | 46.49  | 80.50  | -34.01 | 24.19 | 22.30  | QP     |
| 7   | 14.486    | 41.71  | 69.50  | -27.79 | 19.41 | 22.30  | QP     |

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :HY-CB02  
Condition :3m ,Vertical  
mode :TX\_13.56MHz\_Plane Y  
Test by :Rock

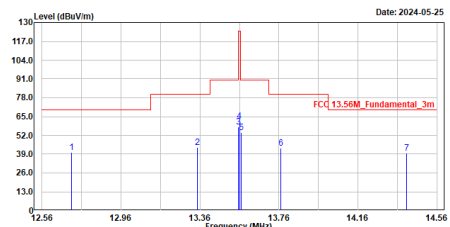


| No. | Frequency | Level  | Limit  | Over   | Read  | Factor | Remark |
|-----|-----------|--------|--------|--------|-------|--------|--------|
|     | MHz       | dBuV/m | Line   | Limit  | Level |        |        |
| 1   | 12.710    | 48.06  | 69.50  | -29.44 | 17.70 | 22.36  | QP     |
| 2   | 13.348    | 43.50  | 80.50  | -37.00 | 21.20 | 22.30  | QP     |
| 3   | 13.553    | 57.73  | 90.47  | -32.74 | 35.43 | 22.30  | QP     |
| 4   | 13.560    | 61.00  | 124.00 | -62.20 | 39.50 | 22.30  | QP     |
| 5   | 13.568    | 54.14  | 90.47  | -36.33 | 31.84 | 22.30  | QP     |
| 6   | 13.770    | 43.41  | 80.50  | -37.09 | 21.11 | 22.30  | QP     |
| 7   | 14.408    | 39.53  | 69.50  | -29.97 | 17.23 | 22.30  | QP     |

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :HY-CB02  
Condition :3m ,Horizontal  
mode :TX\_13.56MHz\_Plane Z  
Test by :Rock

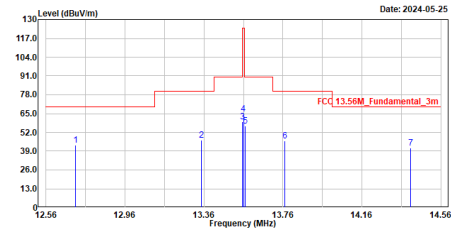

| No. | Frequency | Level  | Limit  | Over   | Read  | Factor | Remark |
|-----|-----------|--------|--------|--------|-------|--------|--------|
|     | MHz       | dBuV/m | dBuV/m | dB     | dBuV  | dB/m   |        |
| 1   | 12.710    | 43.35  | 69.50  | -26.15 | 20.99 | 22.36  | QP     |
| 2   | 13.346    | 46.43  | 80.50  | -34.07 | 24.13 | 22.30  | QP     |
| 3   | 13.553    | 59.52  | 90.47  | -30.95 | 37.22 | 22.30  | QP     |
| 4   | 13.560    | 64.60  | 124.00 | -59.40 | 42.30 | 22.30  | QP     |
| 5   | 13.568    | 56.58  | 90.47  | -33.89 | 34.28 | 22.30  | QP     |
| 6   | 13.770    | 45.95  | 80.50  | -34.55 | 23.65 | 22.30  | QP     |
| 7   | 14.406    | 41.12  | 69.50  | -28.38 | 18.82 | 22.30  | QP     |

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line

Site :HY-CB02  
Condition :3m ,Vertical  
mode :TX\_13.56MHz\_Plane Z  
Test by :Rock

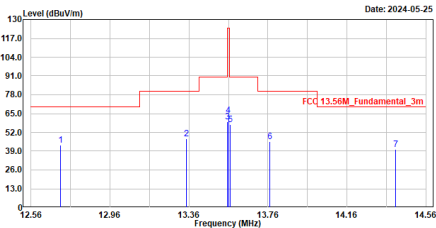





| No. | Frequency | Level  | Limit  | Over   | Read  | Factor | Remark |
|-----|-----------|--------|--------|--------|-------|--------|--------|
|     | MHz       | dBuV/m | dBuV/m | dB     | dBuV  | dB/m   |        |
| 1   | 12.710    | 43.13  | 69.50  | -26.37 | 20.77 | 22.36  | QP     |
| 2   | 13.346    | 47.74  | 80.50  | -32.76 | 25.44 | 22.30  | QP     |
| 3   | 13.553    | 59.58  | 90.47  | -30.89 | 37.28 | 22.30  | QP     |
| 4   | 13.560    | 64.00  | 124.00 | -60.00 | 41.70 | 22.30  | QP     |
| 5   | 13.568    | 57.41  | 90.47  | -33.06 | 35.11 | 22.30  | QP     |
| 6   | 13.770    | 45.52  | 80.50  | -34.98 | 23.22 | 22.30  | QP     |
| 7   | 14.408    | 40.45  | 69.50  | -29.05 | 18.15 | 22.30  | QP     |

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line

Appendix E. Test Result of Radiated Emission


【125 kHz】

POCm-W24CR-RPL

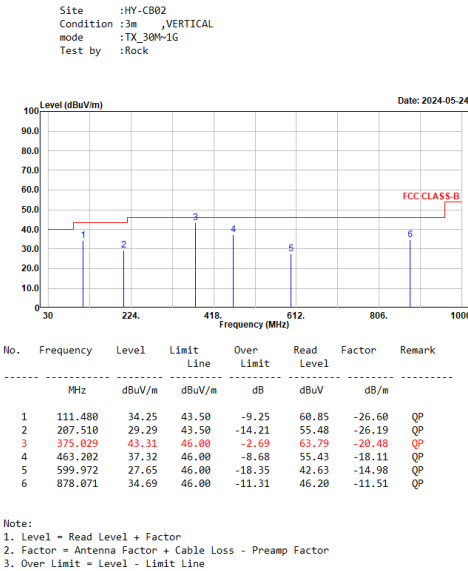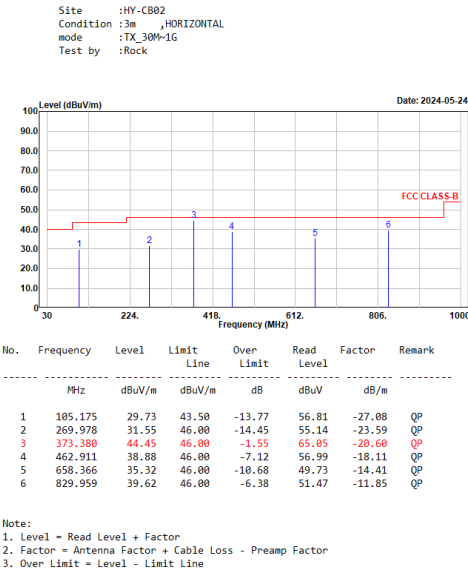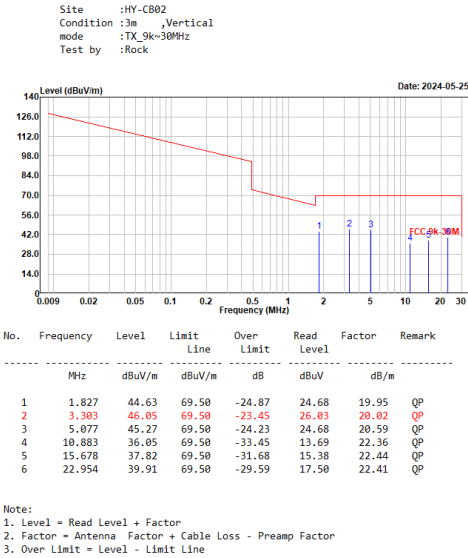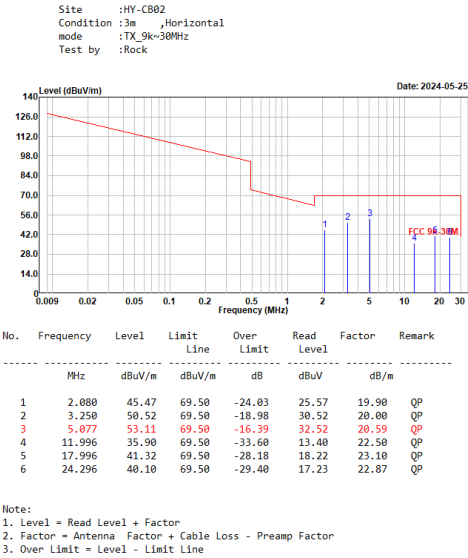

## POCm-W24C-RPL

Site :HY-CB02  
Condition :3m ,HORIZONTAL  
mode :TX\_30W-1G  
Test by :Rock

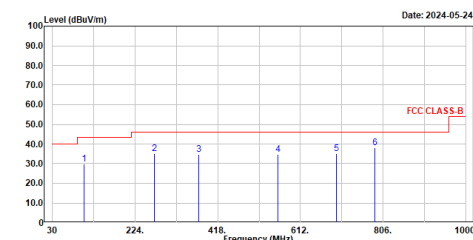


| No. | Frequency | Level  | Limit  | Over   | Read  | Factor | Remark |
|-----|-----------|--------|--------|--------|-------|--------|--------|
|     | MHz       | dBuV/m | dBuV/m | Limit  | Level | dB/m   |        |
| 1   | 103.017   | 29.82  | 43.50  | -13.68 | 57.16 | -27.34 | QP     |
| 2   | 269.978   | 35.17  | 46.00  | -10.83 | 58.76 | -23.59 | QP     |
| 3   | 373.574   | 34.79  | 46.00  | -11.21 | 55.37 | -20.58 | QP     |
| 4   | 558.747   | 34.62  | 46.00  | -11.38 | 50.93 | -16.31 | QP     |
| 5   | 695.985   | 34.92  | 46.00  | -11.08 | 48.55 | -13.63 | QP     |
| 6   | 786.503   | 37.96  | 46.00  | -8.04  | 50.11 | -12.15 | QP     |

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :HY-CB02  
Condition :3m ,VERTICAL  
mode :TX\_30W-1G  
Test by :Rock

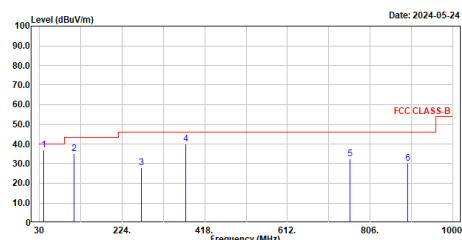


| No. | Frequency | Level  | Limit  | Over   | Read  | Factor | Remark |
|-----|-----------|--------|--------|--------|-------|--------|--------|
|     | MHz       | dBuV/m | dBuV/m | Limit  | Level | dB/m   |        |
| 1   | 40.573    | 37.09  | 40.00  | -2.91  | 60.09 | -23.00 | QP     |
| 2   | 111.383   | 35.15  | 43.50  | -8.35  | 61.78 | -26.63 | QP     |
| 3   | 269.978   | 27.98  | 46.00  | -18.02 | 51.57 | -23.59 | QP     |
| 4   | 373.574   | 39.99  | 46.00  | -6.01  | 60.57 | -20.58 | QP     |
| 5   | 759.343   | 32.48  | 46.00  | -13.52 | 45.02 | -12.54 | QP     |
| 6   | 894.949   | 30.36  | 46.00  | -15.64 | 41.42 | -11.06 | QP     |

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

## POCm-W22CR-RPL

Site :HY-CB02  
Condition :3m ,HORIZONTAL  
mode :TX\_30W-1G  
Test by :Rock

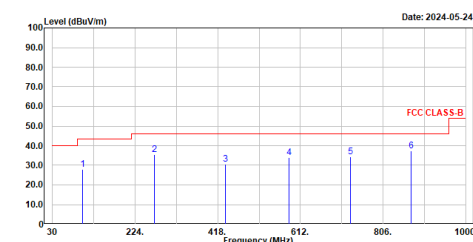


| No. | Frequency | Level  | Limit  | Over   | Read  | Factor | Remark |
|-----|-----------|--------|--------|--------|-------|--------|--------|
|     | MHz       | dBuV/m | dBuV/m | Limit  | Level | dB/m   |        |
| 1   | 101.683   | 27.87  | 43.50  | -15.63 | 55.51 | -27.64 | QP     |
| 2   | 269.978   | 35.33  | 46.00  | -10.67 | 58.92 | -23.59 | QP     |
| 3   | 435.266   | 30.52  | 46.00  | -15.48 | 49.38 | -18.86 | QP     |
| 4   | 585.131   | 33.86  | 46.00  | -12.14 | 49.37 | -15.51 | QP     |
| 5   | 728.982   | 34.48  | 46.00  | -11.52 | 47.43 | -12.95 | QP     |
| 6   | 871.378   | 37.23  | 46.00  | -8.77  | 48.76 | -11.53 | QP     |

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :HY-CB02  
Condition :3m ,VERTICAL  
mode :TX\_30W-1G  
Test by :Rock

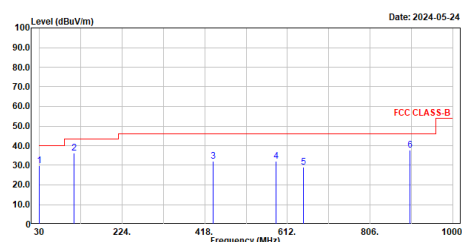


| No. | Frequency | Level  | Limit  | Over   | Read  | Factor | Remark |
|-----|-----------|--------|--------|--------|-------|--------|--------|
|     | MHz       | dBuV/m | dBuV/m | Limit  | Level | dB/m   |        |
| 1   | 30.000    | 29.89  | 40.00  | -10.11 | 54.58 | -24.69 | QP     |
| 2   | 112.062   | 36.15  | 43.50  | -7.35  | 62.58 | -26.43 | QP     |
| 3   | 438.176   | 32.05  | 46.00  | -13.95 | 50.78 | -18.73 | QP     |
| 4   | 585.034   | 31.95  | 46.00  | -14.05 | 47.47 | -15.52 | QP     |
| 5   | 650.024   | 29.17  | 46.00  | -16.83 | 43.64 | -14.47 | QP     |
| 6   | 899.411   | 37.71  | 46.00  | -8.29  | 48.67 | -18.96 | QP     |

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

POCm-W22C-RPL


Site :HY-CB02  
Condition :3m ,HORIZONTAL  
mode :TX\_30W-1G  
Test by :Rock

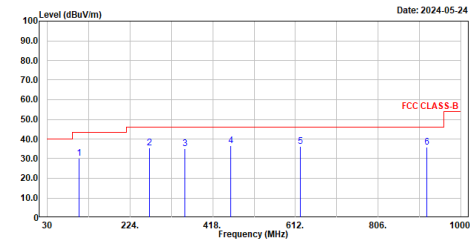

| No. | Frequency | Level  | Limit  | Over   | Read  | Factor | Remark |
|-----|-----------|--------|--------|--------|-------|--------|--------|
|     | MHz       | dBuV/m | dBuV/m | Limit  | Level | dB/m   |        |
| 1   | 103.017   | 30.14  | 43.50  | -13.36 | 57.48 | -27.34 | QP     |
| 2   | 269.978   | 35.32  | 46.00  | -10.68 | 58.91 | -23.59 | QP     |
| 3   | 352.525   | 34.98  | 46.00  | -11.02 | 56.41 | -21.43 | QP     |
| 4   | 460.777   | 36.65  | 46.00  | -9.35  | 54.81 | -18.16 | QP     |
| 5   | 623.543   | 36.29  | 46.00  | -9.71  | 51.14 | -14.85 | QP     |
| 6   | 920.072   | 35.91  | 46.00  | -10.09 | 46.53 | -10.62 | QP     |

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line

Site :HY-CB02  
Condition :3m ,VERTICAL  
mode :TX\_30W-1G  
Test by :Rock

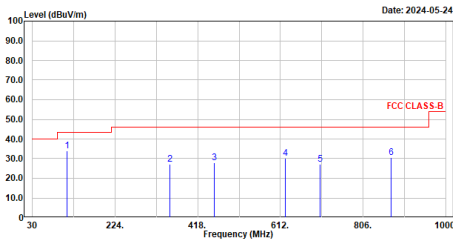


| No. | Frequency | Level  | Limit  | Over   | Read  | Factor | Remark |
|-----|-----------|--------|--------|--------|-------|--------|--------|
|     | MHz       | dBuV/m | dBuV/m | Limit  | Level | dB/m   |        |
| 1   | 111.771   | 33.81  | 43.50  | -9.69  | 60.31 | -26.50 | QP     |
| 2   | 352.525   | 27.18  | 46.00  | -18.82 | 48.61 | -21.43 | QP     |
| 3   | 457.285   | 28.01  | 46.00  | -17.99 | 46.26 | -18.25 | QP     |
| 4   | 623.737   | 30.12  | 46.00  | -15.88 | 44.97 | -14.85 | QP     |
| 5   | 705.120   | 27.30  | 46.00  | -18.70 | 40.91 | -13.61 | QP     |
| 6   | 871.669   | 30.71  | 46.00  | -15.29 | 42.24 | -11.53 | QP     |

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line

**[13.56 MHz]****POCm-W24CR-RPL**

Site :HY-CB02  
Condition :3m ,Horizontal  
mode :TX\_9k~30MHz  
Test by :Rock

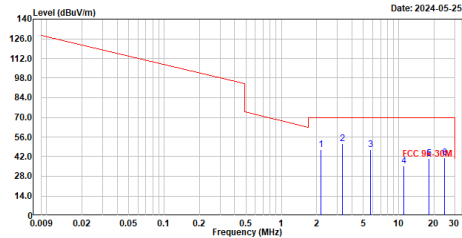


| No. | Frequency | Level  | Limit  | Over   | Read  | Factor | Remark |
|-----|-----------|--------|--------|--------|-------|--------|--------|
|     | MHz       | dBuV/m | dBuV/m | Limit  | Level | dB/m   |        |
| 1   | 2.166     | 46.98  | 69.50  | -22.52 | 27.08 | 19.90  | QP     |
| 2   | 3.330     | 51.35  | 69.50  | -18.15 | 31.32 | 20.03  | QP     |
| 3   | 5.734     | 46.90  | 69.50  | -22.60 | 25.52 | 21.38  | QP     |
| 4   | 10.972    | 35.45  | 69.50  | -34.05 | 13.06 | 22.39  | QP     |
| 5   | 18.143    | 40.66  | 69.50  | -28.84 | 17.53 | 23.13  | QP     |
| 6   | 24.493    | 41.35  | 69.50  | -28.15 | 18.31 | 23.04  | QP     |

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :HY-CB02  
Condition :3m ,Vertical  
mode :TX\_9k~30MHz  
Test by :Rock

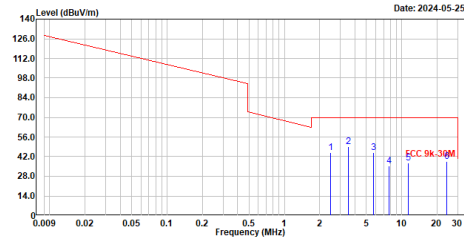


| No. | Frequency | Level  | Limit  | Over   | Read  | Factor | Remark |
|-----|-----------|--------|--------|--------|-------|--------|--------|
|     | MHz       | dBuV/m | dBuV/m | Limit  | Level | dB/m   |        |
| 1   | 2.466     | 44.86  | 69.50  | -24.64 | 24.96 | 19.90  | QP     |
| 2   | 3.524     | 49.14  | 69.50  | -20.36 | 29.03 | 20.11  | QP     |
| 3   | 5.781     | 44.67  | 69.50  | -24.83 | 23.23 | 21.44  | QP     |
| 4   | 7.804     | 35.63  | 69.50  | -33.87 | 13.93 | 21.70  | QP     |
| 5   | 11.334    | 37.74  | 69.50  | -31.76 | 15.31 | 22.43  | QP     |
| 6   | 24.296    | 38.39  | 69.50  | -31.11 | 15.52 | 22.87  | QP     |

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :HY-CB02  
Condition :3m ,HORIZONTAL  
mode :TX\_30M~1G  
Test by :Rock

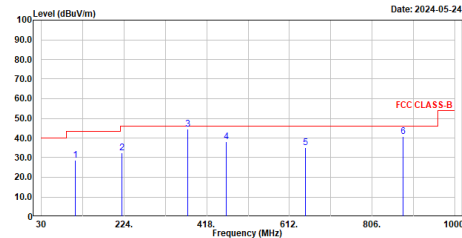


| No. | Frequency | Level  | Limit  | Over   | Read  | Factor | Remark |
|-----|-----------|--------|--------|--------|-------|--------|--------|
|     | MHz       | dBuV/m | dBuV/m | Limit  | Level | dB/m   |        |
| 1   | 110.025   | 28.70  | 43.50  | -14.80 | 55.34 | -26.64 | QP     |
| 2   | 219.538   | 32.48  | 46.00  | -13.52 | 58.37 | -25.89 | QP     |
| 3   | 373.186   | 44.70  | 46.00  | -1.30  | 65.31 | -20.61 | QP     |
| 4   | 463.008   | 37.96  | 46.00  | -8.04  | 56.07 | -18.11 | QP     |
| 5   | 650.024   | 35.02  | 46.00  | -10.98 | 49.49 | -14.47 | QP     |
| 6   | 878.362   | 40.72  | 46.00  | -5.28  | 52.23 | -11.51 | QP     |

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :HY-CB02  
Condition :3m ,VERTICAL  
mode :TX\_30M~1G  
Test by :Rock

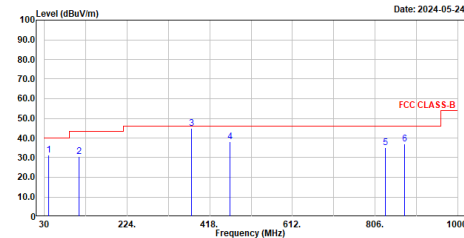


| No. | Frequency | Level  | Limit  | Over   | Read  | Factor | Remark |
|-----|-----------|--------|--------|--------|-------|--------|--------|
|     | MHz       | dBuV/m | dBuV/m | Limit  | Level | dB/m   |        |
| 1   | 40.573    | 31.28  | 40.00  | -8.72  | 55.08 | -23.80 | QP     |
| 2   | 110.898   | 30.57  | 43.50  | -12.93 | 57.30 | -26.73 | QP     |
| 3   | 374.447   | 44.86  | 46.00  | -1.14  | 65.38 | -20.52 | QP     |
| 4   | 464.754   | 38.00  | 46.00  | -8.00  | 56.07 | -18.07 | QP     |
| 5   | 829.765   | 34.91  | 46.00  | -11.09 | 46.76 | -11.85 | QP     |
| 6   | 874.676   | 37.17  | 46.00  | -8.83  | 48.70 | -11.53 | QP     |

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

## POCm-W24C-RPL

Site :HY-CB02  
Condition :3m ,HORIZONTAL  
mode :TX\_30W-1G  
Test by :Rock

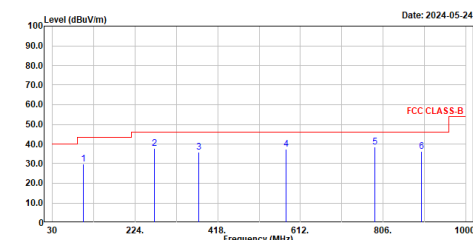


| No. | Frequency | Level  | Limit  | Over   | Read  | Factor | Remark |
|-----|-----------|--------|--------|--------|-------|--------|--------|
|     | MHz       | dBuV/m | dBuV/m | Limit  | Level | dB/m   |        |
| 1   | 182.459   | 29.93  | 43.50  | -13.57 | 57.52 | -27.59 | QP     |
| 2   | 269.978   | 37.76  | 46.00  | -8.24  | 61.35 | -23.59 | QP     |
| 3   | 373.186   | 35.92  | 46.00  | -10.08 | 56.53 | -20.61 | QP     |
| 4   | 579.020   | 37.36  | 46.00  | -8.64  | 53.10 | -15.74 | QP     |
| 5   | 786.583   | 38.31  | 46.00  | -7.69  | 50.46 | -12.15 | QP     |
| 6   | 895.822   | 36.17  | 46.00  | -9.83  | 47.21 | -11.04 | QP     |

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :HY-CB02  
Condition :3m ,VERTICAL  
mode :TX\_30W-1G  
Test by :Rock

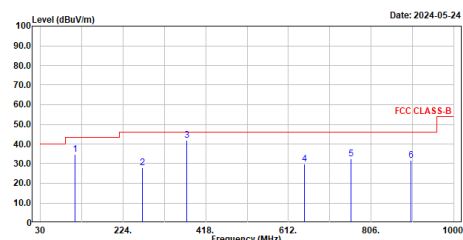


| No. | Frequency | Level  | Limit  | Over   | Read  | Factor | Remark |
|-----|-----------|--------|--------|--------|-------|--------|--------|
|     | MHz       | dBuV/m | dBuV/m | Limit  | Level | dB/m   |        |
| 1   | 111.286   | 34.59  | 43.50  | -8.91  | 61.24 | -26.65 | QP     |
| 2   | 269.978   | 27.81  | 46.00  | -18.19 | 51.40 | -23.59 | QP     |
| 3   | 373.671   | 41.78  | 46.00  | -4.22  | 62.35 | -20.57 | QP     |
| 4   | 649.927   | 29.83  | 46.00  | -16.17 | 44.30 | -14.47 | QP     |
| 5   | 759.343   | 32.60  | 46.00  | -13.40 | 45.14 | -12.54 | QP     |
| 6   | 899.702   | 31.82  | 46.00  | -14.18 | 42.78 | -10.96 | QP     |

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

## POCm-W22CR-RPL

Site :HY-CB02  
Condition :3m ,HORIZONTAL  
mode :TX\_30W-1G  
Test by :Rock

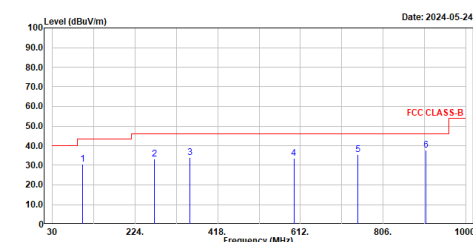


| No. | Frequency | Level  | Limit  | Over   | Read  | Factor | Remark |
|-----|-----------|--------|--------|--------|-------|--------|--------|
|     | MHz       | dBuV/m | dBuV/m | Limit  | Level | dB/m   |        |
| 1   | 181.101   | 30.39  | 43.50  | -13.11 | 58.09 | -27.70 | QP     |
| 2   | 269.978   | 33.14  | 46.00  | -12.86 | 56.73 | -23.59 | QP     |
| 3   | 352.525   | 33.87  | 46.00  | -12.13 | 55.30 | -21.43 | QP     |
| 4   | 596.674   | 33.61  | 46.00  | -12.39 | 48.72 | -15.11 | QP     |
| 5   | 746.927   | 35.61  | 46.00  | -10.39 | 48.36 | -12.75 | QP     |
| 6   | 906.783   | 37.61  | 46.00  | -8.39  | 48.44 | -10.83 | QP     |

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :HY-CB02  
Condition :3m ,VERTICAL  
mode :TX\_30W-1G  
Test by :Rock

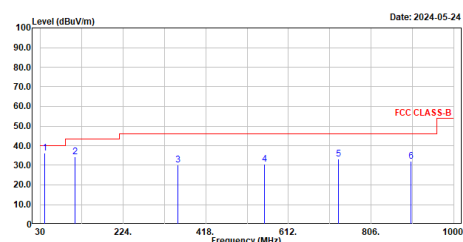


| No. | Frequency | Level  | Limit  | Over   | Read  | Factor | Remark |
|-----|-----------|--------|--------|--------|-------|--------|--------|
|     | MHz       | dBuV/m | dBuV/m | Limit  | Level | dB/m   |        |
| 1   | 40.573    | 36.28  | 40.00  | -3.72  | 60.08 | -23.80 | QP     |
| 2   | 110.995   | 34.27  | 43.50  | -9.23  | 61.01 | -26.74 | QP     |
| 3   | 352.525   | 30.14  | 46.00  | -15.86 | 51.57 | -21.43 | QP     |
| 4   | 555.934   | 30.64  | 46.00  | -15.36 | 47.07 | -16.43 | QP     |
| 5   | 729.079   | 33.23  | 46.00  | -12.77 | 46.18 | -12.95 | QP     |
| 6   | 899.685   | 32.03  | 46.00  | -13.97 | 42.99 | -10.96 | QP     |

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

POCm-W22C-RPL


Site :HY-CB02  
Condition :3m ,HORIZONTAL  
mode :TX\_30W-1G  
Test by :Rock

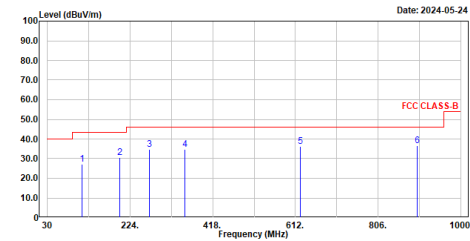

| No. | Frequency | Level  | Limit  | Over   | Read  | Factor | Remark |
|-----|-----------|--------|--------|--------|-------|--------|--------|
|     | MHz       | dBuV/m | dBuV/m | Limit  | Level | dB/m   |        |
| 1   | 111.092   | 27.31  | 43.50  | -16.19 | 54.02 | -26.71 | QP     |
| 2   | 199.653   | 30.63  | 43.50  | -12.87 | 57.00 | -26.37 | QP     |
| 3   | 269.978   | 34.66  | 46.00  | -11.34 | 58.25 | -23.59 | QP     |
| 4   | 352.525   | 34.70  | 46.00  | -11.30 | 56.13 | -21.43 | QP     |
| 5   | 623.252   | 36.12  | 46.00  | -9.88  | 50.97 | -14.85 | QP     |
| 6   | 898.635   | 36.68  | 46.00  | -9.32  | 47.66 | -10.98 | QP     |

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line

Site :HY-CB02  
Condition :3m ,VERTICAL  
mode :TX\_30W-1G  
Test by :Rock

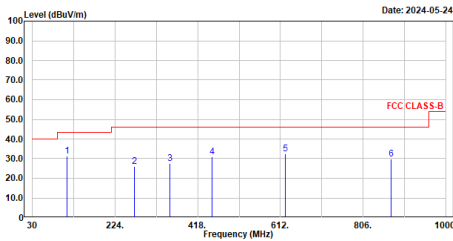

| No. | Frequency | Level  | Limit  | Over   | Read  | Factor | Remark |
|-----|-----------|--------|--------|--------|-------|--------|--------|
|     | MHz       | dBuV/m | dBuV/m | Limit  | Level | dB/m   |        |
| 1   | 111.400   | 31.15  | 43.50  | -12.35 | 57.75 | -26.60 | QP     |
| 2   | 269.978   | 26.01  | 46.00  | -19.99 | 49.60 | -23.59 | QP     |
| 3   | 352.525   | 27.56  | 46.00  | -18.44 | 48.99 | -21.43 | QP     |
| 4   | 452.241   | 30.97  | 46.00  | -15.03 | 49.34 | -18.37 | QP     |
| 5   | 623.737   | 32.39  | 46.00  | -13.61 | 47.24 | -14.85 | QP     |
| 6   | 872.639   | 29.94  | 46.00  | -16.06 | 41.47 | -11.53 | QP     |

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line