




FCC RADIO TEST REPORT

FCC ID : RI7FN990B40
Equipment : 5G NR Module
Brand Name : 
Model Name : FN990B40
Marketing Name : FN990B40
Applicant : Telit Communications S.p.A.
Via Stazione Di Prosecco 5/B, Trieste 34010, Italy
Manufacturer : Telit Communications S.p.A.
Via Stazione Di Prosecco 5/B, Trieste 34010, Italy
Standard : FCC 47 CFR Part 2, 96

The product was received on Oct. 15, 2024 and testing was performed from Oct. 28, 2024 to Aug. 08, 2025. We, Sporton International Inc. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.



Approved by: Louis Wu

Sporton International Inc. EMC & Wireless Communications Laboratory
No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Product Feature of Equipment Under Test.....	5
1.2 Modification of EUT	5
1.3 Testing Site.....	6
1.4 Applied Standards	6
2 Test Configuration of Equipment Under Test	7
2.1 Test Mode.....	7
2.2 Connection Diagram of Test System.....	8
2.3 Support Unit used in test configuration and system	8
2.4 Measurement Results Explanation Example.....	8
2.5 Frequency List of Low/Middle/High Channels	9
3 Conducted Test Items.....	15
3.1 Measuring Instruments	15
3.2 Conducted Output Power Measurement	16
3.3 Peak-to-Average Ratio	17
3.4 EIRP and Power Density	18
3.5 Occupied Bandwidth.....	19
3.6 Conducted Band Edge	20
3.7 Conducted Spurious Emission	21
3.8 Frequency Stability	22
4 Radiated Test Items	23
4.1 Measuring Instruments	23
4.2 Test Setup	23
4.3 Test Result of Radiated Test	24
4.4 Radiated Spurious Emission	25
5 List of Measuring Equipment.....	26
6 Measurement Uncertainty	28
Appendix A. Test Results of Conducted Test	
Appendix B. Test Results of Radiated Test	
Appendix C. Test Setup Photographs	



History of this test report

Report No.	Version	Description	Issue Date
FG4O1530D	01	Initial issue of report	Jul. 15, 2025
FG4O1530D	02	Revise List of Measuring Equipment and Appendix A This report is an updated version, replacing the report issued on Jul. 15, 2025	Aug. 08, 2025
FG4O1530D	03	Revise section 1.1 This report is an updated version, replacing the report issued on Aug. 08, 2025.	Aug. 18, 2025

Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.2	§2.1046	Conducted Output Power	Pass	-
3.3	§96.41	Peak-to-Average Ratio	Pass	-
3.4	§96.41	Effective Isotropic Radiated Power TRP	Pass	-
		Power Density	Pass	-
3.5	§2.1049 §96.41	Occupied Bandwidth	Pass	-
3.6	§2.1051 §96.41	Conducted Band Edge Measurement	Pass	-
3.7	§2.1051 §96.41	Conducted Spurious Emission	Pass	-
3.8	§2.1055	Frequency Stability for Temperature & Voltage	Pass	-
4.4	§2.1053 §96.41	Radiated Spurious Emission	Pass	0.33 dB under the limit at 10740.00 MHz

Conformity Assessment Condition:

- The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturer who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
- The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty".

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Keven Cheng

Report Producer: Clio Lo



1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature	
General Specs WCDMA/LTE/5G NR and GNSS.	
Antenna Type WWAN: Monopole Antenna	
HW Version: 1.00	
SW Version: MOW.003001	

Remark: The EUT's information above is declared by manufacturer. Please refer to Disclaimer in report summary.

Support band and evaluated information	
Supported band	B42,B43,B48,B42C,B43C,B48B,B48C
Evaluated and Tested band	B48,B42C,B43C,B48B,B48C
Band covered information	Wider operating frequency band range covers narrower one when the power is worse as follows: ■ B48 cover B42 (Part 96) ■ B48 cover B43 (Part 96)

TDD band Power Class				
	SISO PC3	SISO PC2		
B42/ B42C	V			
B43/ B43C	V			
B48/ B48B / B48C	V			

RF Exposure Max Antenna Gain information(dBi)							
Band	Ant 0						Main Ant. #
B42	0.5						0
B43	0.5						0
B48	0.5						0

1.2 Modification of EUT

No modifications made to the EUT during the testing.

1.3 Testing Site

Test Site	Sporton International Inc. EMC & Wireless Communications Laboratory	
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978	
Test Site No.	Sporton Site No.	
	TH03-HY	03CH07-HY
Test Engineer	HaoEn Zhang	Jesse Wang, Stan Hsieh and Ken Wu
Temperature (°C)	25.1~25.5	17.6~24.5
Relative Humidity (%)	50.1~55.9	47.2~68.6

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC Designation No.: TW1190

1.4 Applied Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ ANSI C63.26-2015
- ♦ FCC 47 CFR Part 2, 96
- ♦ FCC KDB 971168 D01 Power Meas. License Digital Systems v03r01
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01

Remark:

1. All the test items were validated and recorded in accordance with the standards without any modification during the testing.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.
3. The TAF code is not including all the FCC KDB listed without accreditation.

2 Test Configuration of Equipment Under Test

2.1 Test Mode

Antenna port conducted and radiated test items listed below are performed according to KDB 971168 D01 Power Meas. License Digital Systems v03r01 with maximum output power.

For radiated measurement, the measured emission level of the EUT was maximized by rotating the EUT on a turntable, adjusting the orientation of the EUT and EUT antenna in two config (Ant. Horizontal and Ant. Vertical), and adjusting the measurement antenna orientation, following C63.26 exploratory test procedures and only the worst case emissions were reported in this report.


Modulation Type	Modulation
A	QPSK
B	16QAM
C	64QAM
D	256QAM

Test Item	Modulation Type	Bandwidth	RB Size	Channel
Conducted Power	A, B, C, D	All	1, Half, Full	L, M, H
EIRP	A, B, C, D	All	1, Half, Full	L, M, H
PAR	A, B, C, D	20 MHz	Full	M
Bandwidth	A, B, C, D	All	Full	M
ACLR, Mask	A, B, C, D	All	1RB Full	L, M, H
CSE	A	All	1RB	L, M, H
Frequency Stability	A	10 MHz	Full	M
RSE	A	20 MHz	1RB	L, M, H

Remark:

1. Evaluated all the transmitter signal and reporting worst-case configuration among all modulation types.
2. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst-case emissions are reported.
3. One representative bandwidth is selected to perform PAR and frequency stability.
4. The test country code is set to MCC 310

2.2 Connection Diagram of Test System

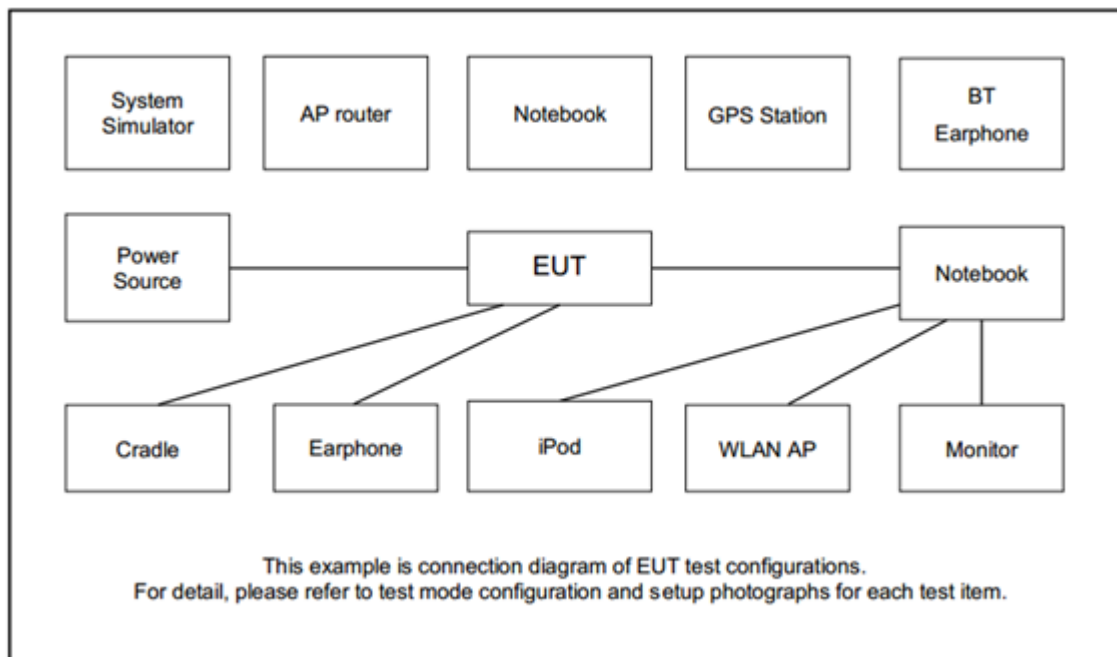

2.3 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model No.	FCC ID	Data Cable	Power Cord
1.	Power Supply	GW Instek	GPE-2323	N/A	N/A	N/A
2.	System Simulator	Anritsu	MT8821	N/A	N/A	Unshielded, 1.8m

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.5 dB and 10dB attenuator.

Example :

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 4.5 + 10 = 14.5 \text{ (dB)} \end{aligned}$$



2.5 Frequency List of Low/Middle/High Channels

LTE Band 42 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	43190	43340	43490
	Frequency	3560.0	3575.0	3590.0
15	Channel	43165	43340	43515
	Frequency	3557.5	3575.0	3592.5
10	Channel	43140	43340	43540
	Frequency	3555.0	3575.0	3595.0
5	Channel	43115	43340	43565
	Frequency	3552.5	3575.0	3597.5

LTE Band 43 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	43690	44090	44490
	Frequency	3610.0	3650.0	3690.0
15	Channel	43665	44090	44515
	Frequency	3607.5	3650.0	3692.5
10	Channel	43640	44090	44540
	Frequency	3605.0	3650.0	3695.0
5	Channel	43615	44090	44565
	Frequency	3602.5	3650.0	3697.5

LTE Band 48 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	55340	55990	56640
	Frequency	3560	3625	3690
15	Channel	55315	55990	56665
	Frequency	3557.5	3625	3692.5
10	Channel	55290	55990	56690
	Frequency	3555	3625	3695
5	Channel	55265	55990	56715
	Frequency	3552.5	3625	3697.5

LTE Band 42C Channel and Frequency List_CA					
BW [MHz]	Channel/Frequency(MHz)		Lowest	Middle	Highest
20 + 20	PCC	Channel	43190	43241	43292
		Frequency	3560.0	3565.1	3570.2
	SCC	Channel	43388	43439	43490
		Frequency	3579.8	3584.9	3590.0
20 + 15	PCC	Channel	43190	43266	43344
		Frequency	3560.0	3567.6	3575.4
	SCC	Channel	43361	43437	43515
		Frequency	3577.1	3584.7	3592.5
15 + 20	PCC	Channel	43165	43243	43319
		Frequency	3557.5	3565.3	3572.9
	SCC	Channel	43336	43414	43490
		Frequency	3574.6	3582.4	3590.0
20 + 10	PCC	Channel	43190	43291	43396
		Frequency	3560.0	3570.1	3580.6
	SCC	Channel	43334	43435	43540
		Frequency	3574.4	3584.5	3595.0
10 + 20	PCC	Channel	43140	43246	43346
		Frequency	3555.0	3565.6	3575.6
	SCC	Channel	43284	43390	43490
		Frequency	3569.4	3580.0	3590.0
20 + 5	PCC	Channel	43190	43315	43448
		Frequency	3560.0	3572.5	3585.8
	SCC	Channel	43307	43432	43565
		Frequency	3571.7	3584.2	3597.5
5 + 20	PCC	Channel	43115	43248	43373
		Frequency	3552.5	3565.8	3578.3
	SCC	Channel	43232	43365	43490
		Frequency	3564.2	3577.5	3590.0

LTE Band 43C Channel and Frequency List_CA					
BW [MHz]	Channel/Frequency(MHz)		Lowest	Middle	Highest
20 + 20	PCC	Channel	43690	43991	44292
		Frequency	3610.0	3640.1	3670.2
	SCC	Channel	43888	44189	44490
		Frequency	3629.8	3659.9	3690.0
20 + 15	PCC	Channel	43690	44016	44344
		Frequency	3610.0	3642.6	3675.4
	SCC	Channel	43861	44187	44515
		Frequency	3627.1	3659.7	3692.5
15 + 20	PCC	Channel	43665	43993	44319
		Frequency	3607.5	3640.3	3672.9
	SCC	Channel	43836	44164	44490
		Frequency	3624.6	3657.4	3690.0
15 + 15	PCC	Channel	43665	44015	44365
		Frequency	3607.5	3642.5	3677.5
	SCC	Channel	43815	44165	44515
		Frequency	3622.5	3657.5	3692.5
15 + 10	PCC	Channel	43665	44041	44420
		Frequency	3607.5	3645.1	3683.0
	SCC	Channel	43785	44161	44540
		Frequency	3619.5	3657.1	3695.0
10 + 15	PCC	Channel	43640	44019	44395
		Frequency	3605.0	3642.9	3680.5
	SCC	Channel	43760	44139	44515
		Frequency	3617.0	3654.9	3692.5
20 + 10	PCC	Channel	43690	44041	44396
		Frequency	3610.0	3645.1	3680.6
	SCC	Channel	43834	44185	44540
		Frequency	3624.4	3659.5	3695.0



LTE Band 43C Channel and Frequency List_CA					
10 + 20	PCC	Channel	43640	43996	44346
		Frequency	3605.0	3640.6	3675.6
	SCC	Channel	43784	44140	44490
		Frequency	3619.4	3655.0	3690.0
20 + 5	PCC	Channel	43690	44065	44448
		Frequency	3610.0	3647.5	3685.8
	SCC	Channel	43807	44182	44565
		Frequency	3621.7	3659.2	3697.5
5 + 20	PCC	Channel	43615	43998	44373
		Frequency	3602.5	3640.8	3678.3
	SCC	Channel	43732	44115	44490
		Frequency	3614.2	3652.5	3690.0

LTE Band 48C Channel and Frequency List_CA					
BW [MHz]	Channel/Frequency(MHz)		Lowest	Middle	Highest
20 + 20	PCC	Channel	55340	55891	56442
		Frequency	3560	3615.1	3670.2
	SCC	Channel	55538	56089	56640
		Frequency	3579.8	3634.9	3690.0
20 + 15	PCC	Channel	55340	55916	56491
		Frequency	3560	3617.6	3675.1
	SCC	Channel	55511	56087	56662
		Frequency	3577.1	3634.7	3692.2
15 + 20	PCC	Channel	55318	55893	56469
		Frequency	3557.8	3615.3	3672.9
	SCC	Channel	55489	56064	56640
		Frequency	3574.9	3632.4	3690.0
20 + 10	PCC	Channel	55340	55941	56541
		Frequency	3560	3620.1	3680.1
	SCC	Channel	55484	56085	56685
		Frequency	3574.4	3634.5	3694.5
10 + 20	PCC	Channel	55295	55896	56496
		Frequency	3555.5	3615.6	3675.6
	SCC	Channel	55439	56040	56640
		Frequency	3569.9	3630	3690
20 + 5	PCC	Channel	55340	55965	56590
		Frequency	3560	3622.5	3685
	SCC	Channel	55457	56082	56707
		Frequency	3571.7	3634.2	3696.7
5 + 20	PCC	Channel	55273	55896	56523
		Frequency	3553.3	3615.6	3678.3
	SCC	Channel	55390	56015	56640
		Frequency	3565	3627.5	3690.0



LTE Band 48B Channel and Frequency List_CA					
BW [MHz]	Channel/Frequency(MHz)		Lowest	Middle	Highest
10 + 10	PCC	Channel	55290	55945	56591
		Frequency	3555	3620	3685.1
	SCC	Channel	55389	56044	56690
		Frequency	3564.9	3630	3695


3 Conducted Test Items

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.1.1 Test Setup


3.1.2 Conducted Output Power

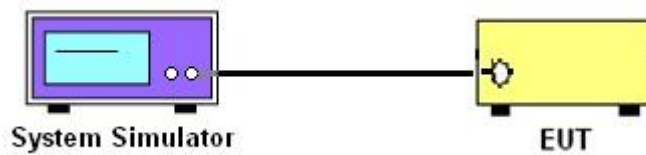

3.1.3 EIRP, Power Density, Peak-to-Average Ratio, Occupied Bandwidth, Conducted Band-Edge, and Conducted Spurious Emission

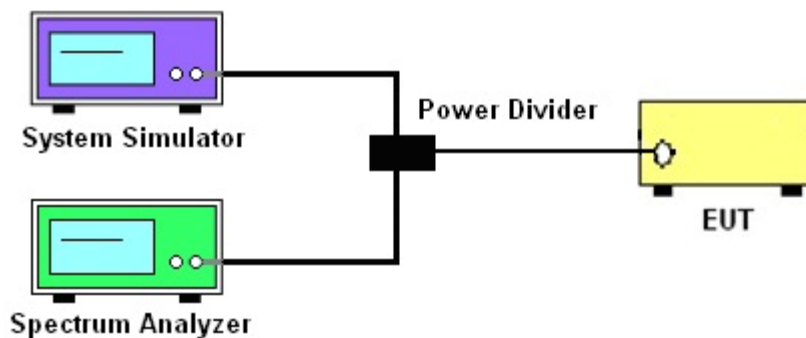

3.1.4 Frequency Stability

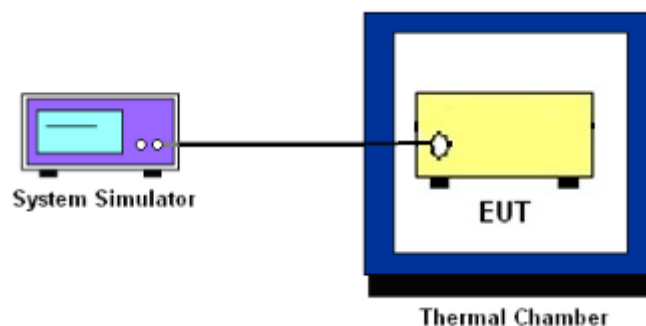

3.1.5 Test Result of Conducted Test

Please refer to Appendix A.



3.2 Conducted Output Power Measurement

3.2.1 Description of the Conducted Output Power Measurement

A base station simulator was used to establish communication with the EUT. Its parameters were set to transmit the maximum power on the EUT. The measured power in the radio frequency on the transmitter output terminals shall be reported.

3.2.2 Test Procedures

1. The transmitter output port was connected to base station.
2. Set EUT at maximum power through base station.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure and record the power level from the system simulator.



3.3 Peak-to-Average Ratio

3.3.1 Description of the PAR Measurement

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.3.2 Test Procedures

The testing follows ANSI C63.26-2015 Section 5.2.6

1. The EUT was connected to spectrum and system simulator via a power divider.
2. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
3. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
4. Record the deviation as Peak to Average Ratio.

3.4 EIRP and Power Density

3.4.1 Description of the EIRP and Power Density Measurement

The EIRP of mobile transmitters must not exceed 23 dBm /10 megahertz for LTE Band 48.

The testing follows ANSI C63.26-2015 Section 5.2.5.5.

According to KDB 412172 D01 Power Approach,

$EIRP = PT + GT - LC$, where

PT = transmitter output power in dBm

GT = gain of the transmitting antenna in dBi

LC = signal attenuation in the connecting cable between the transmitter and antenna in dB

Device	Maximum EIRP (dBm/10 MHz)	Maximum PSD (dBm/MHz)
End User Device	23	n/a
Category A CBSD	30	20
Category B CBSD	47	37

Remark: Total channel power is complied with EIRP limit 23dBm/10MHz.

3.4.2 Test Procedures

The testing follows procedure in Section 5.2 of ANSI C63.26-2015 and KDB 940660 D01 Part 96 CBRS Eqpt v03 Section 3.2(b)(2)

Determine the EIRP by adding the effective antenna gain to the measured average conducted power level.

3.5 Occupied Bandwidth

3.5.1 Description of Occupied Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.5.2 Test Procedures

The testing follows ANSI C63.26-2015 Section 5.4.3 (26dB) and Section 5.4.4 (99OB)

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
3. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
4. Set the detection mode to peak, and the trace mode to max hold.
5. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.
(this is the reference value)
6. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
7. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
8. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.

3.6 Conducted Band Edge

3.6.1 Description of Conducted Band Edge Measurement

The conducted power of any End User Device emission outside the fundamental emission (whether in or outside of the authorized band) shall not exceed -13 dBm/MHz within 0 to B megahertz (where B is the bandwidth in megahertz of the assigned channel or multiple contiguous channels of the End User Device) above the upper CBSD-assigned channel edge and within 0 to B megahertz below the lower CBSD-assigned channel edge. At all frequencies greater than B megahertz above the upper CBSD assigned channel edge and less than B megahertz below the lower CBSD-assigned channel edge, the conducted power of any End User Device emission shall not exceed -25 dBm/MHz. Notwithstanding the emission limits in this paragraph, the Adjacent Channel Leakage Ratio for End User Devices shall be at least 30 dB.

3.6.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 6.1.

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The band edges of low and high channels for the highest RF powers were measured.
3. Set RBW $\geq 1\%$ EBW in the 1MHz band immediately outside and adjacent to the band edge.
4. Beyond the 1 MHz band from the band edge, RBW=1MHz was used
5. Set spectrum analyzer with RMS detector.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
- 7.

For Adjacent Channel Leakage Ratio (ACLR) measurement,

1. The Adjacent Channel Leakage Ratio (ACLR) is the ratio of the average power in the assigned aggregated channel bandwidth to the average power over the equivalent adjacent channel bandwidth.
2. The option ACLR of spectrum analyzer is used and measures the ACLR ratio by setting equivalent channel bandwidth.
3. The measured ACLR ratio shall be at least 30 dB.

3.7 Conducted Spurious Emission

3.7.1 Description of Conducted Spurious Emission Measurement

96.41 (e)(2)

The conducted power of any emissions below 3530 MHz or above 3720 MHz shall not exceed -40dBm/MHz.

3.7.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 6.1.

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.
The path loss was compensated to the results for each measurement.
3. The middle channel for the highest RF power within the transmitting frequency was measured.
4. The conducted spurious emission for the whole frequency range was taken.
5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz.
6. Set spectrum analyzer with RMS detector.
7. Taking the record of maximum spurious emission.
8. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
9. The limit line is -40dBm/MHz.
10. The test reduction is applied to 1RB case for 10MHz Bandwidth to cover the all operation bandwidths. RBW 500kHz is applied to the 0-1MHz offset from the edge of the frequency block group for 1RB mode in order to represent the worst case condition.

3.8 Frequency Stability

3.8.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block.

3.8.2 Test Procedures for Temperature Variation

The testing follows FCC KDB 971168 D01 v03r01 Section 9.0.

1. The EUT was set up in the thermal chamber and connected with the system simulator.
2. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
3. With power OFF, the temperature was raised in 10°C step up to 50°C. The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.8.3 Test Procedures for Voltage Variation

The testing follows FCC KDB 971168 D01 v03r01 Section 9.0.

1. The EUT was placed in a temperature chamber at 25±5° C and connected with the system simulator.
2. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
3. The variation in frequency was measured for the worst case.


4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.2 Test Setup


For radiated test below 30MHz

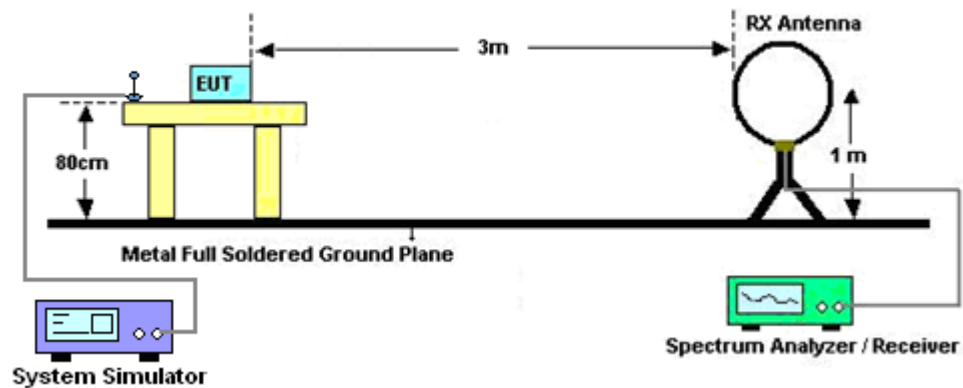


For radiated test from 30MHz to 1GHz

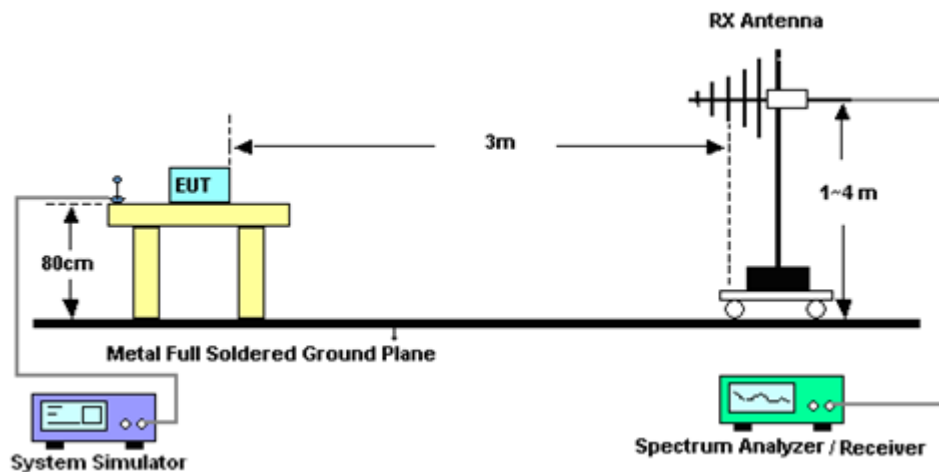

For radiated emissions from 1GHz to 18GHz

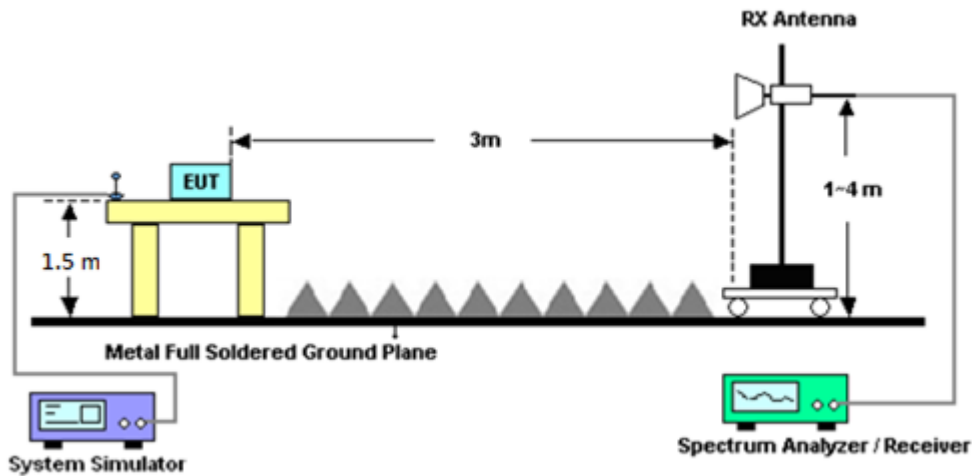

For radiated emissions above 18GHz

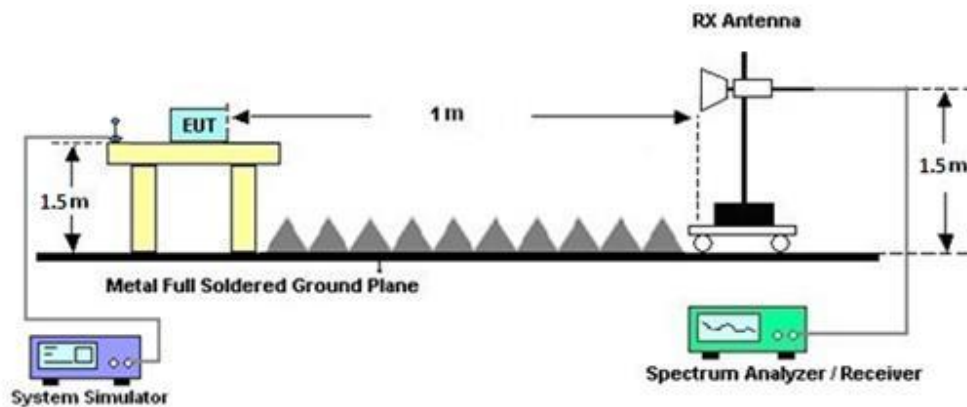

4.3 Test Result of Radiated Test

Please refer to Appendix B.

Note:

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.

4.4 Radiated Spurious Emission

4.4.1 Description of Radiated Spurious Emission

The radiated spurious emission was measured by substitution method according to ANSI C63.26-2015.

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least -40dBm / MHz

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.4.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 7 and ANSI C63.26-2015 section 5.5.4 Radiated measurement using the field strength method.

1. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
2. The EUT was set 3 meters from the receiving antenna mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between 1m to 4m to search the maximum spurious emission for both horizontal and vertical polarizations.
5. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
7. To convert spectrum reading E(dBuV/m) to EIRP(dBm)
$$\text{EIRP(dBm)} = \text{Level (dBuV/m)} + 20\log(d) - 104.77,$$
where d is the distance at which field strength limit is specified in the rules
8. Field Strength Level (dBm) = Spectrum Reading (dBm) + Antenna Factor + Cable Loss + Read Level - Preamp Factor.
9. ERP (dBm) = EIRP (dBm) - 2.15
10. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.



5 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Bilog Antenna	TESEQ	CBL 6111D & 00800N1D01 N-06	35419 & 03	30MHz~1GHz	Apr. 22, 2024	Nov. 08, 2024~ Dec. 22, 2024	Apr. 21, 2025	Radiation (03CH07-HY)
Bilog Antenna	TESEQ	CBL 6111D & 00800N1D01 N-06	35419 & 03	30MHz~1GHz	Apr. 21, 2025	Jul. 02, 2025 ~ Jul. 03, 2025	Apr. 20, 2026	Radiation (03CH07-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100315	9 kHz~30 MHz	Feb. 23, 2024	Nov. 08, 2024~ Dec. 22, 2024	Feb. 22, 2025	Radiation (03CH07-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100315	9 kHz~30 MHz	Mar. 06, 2025	Jul. 02, 2025 ~ Jul. 03, 2025	Mar. 05, 2026	Radiation (03CH07-HY)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00075962	1GHz ~ 18GHz	Nov. 27, 2023	Nov. 08, 2024~ Nov. 25, 2024	Nov. 26, 2024	Radiation (03CH07-HY)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00227880	1GHz ~ 18GHz	Oct. 04, 2024	Nov. 26, 2024~ Dec. 22, 2024	Oct. 03, 2025	Radiation (03CH07-HY)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00075962	1GHz ~ 18GHz	Nov. 28, 2024	Jul. 02, 2025 ~ Jul. 03, 2025	Nov. 27, 2025	Radiation (03CH07-HY)
Preamplifier	COM-POWER	PA-103A	161241	10MHz~1GHz	Oct. 01, 2024	Nov. 08, 2024~ Dec. 22, 2024	Sep. 30, 2025	Radiation (03CH07-HY)
Preamplifier	COM-POWER	PA-103A	161241	10MHz~1GHz	Oct. 01, 2024	Jul. 02, 2025 ~ Jul. 03, 2025	Sep. 30, 2025	Radiation (03CH07-HY)
Preamplifier	Agilent	8449B	3008A023 62	1GHz~26.5GHz	Mar. 23, 2024	Nov. 08, 2024~ Dec. 22, 2024	Mar. 22, 2025	Radiation (03CH07-HY)
Preamplifier	Agilent	8449B	3008A023 62	1GHz~26.5GHz	Mar. 22, 2025	Jul. 02, 2025 ~ Jul. 03, 2025	Mar. 21, 2026	Radiation (03CH07-HY)
Preamplifier	EMEC	EM18G40G	0600789	18-40GHz	Aug. 05, 2024	Nov. 08, 2024~ Dec. 22, 2024	Aug. 04, 2025	Radiation (03CH07-HY)
Preamplifier	EMEC	EM18G40G	0600789	18-40GHz	Aug. 05, 2024	Jul. 02, 2025 ~ Jul. 03, 2025	Aug. 04, 2025	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY28655/4 MY24971/4 MY15682/4	30MHz to 18GHz	Feb. 21, 2024	Nov. 08, 2024~ Dec. 22, 2024	Feb. 20, 2025	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY28655/4 MY24971/4 MY15682/4	30MHz to 18GHz	Feb. 20, 2025	Jul. 02, 2025 ~ Jul. 03, 2025	Feb. 19, 2026	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	MY2858/2	18GHz~40GHz	Feb. 21, 2024	Nov. 08, 2024~ Dec. 22, 2024	Feb. 20, 2025	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	MY2858/2	18GHz~40GHz	Feb. 20, 2025	Jul. 02, 2025 ~ Jul. 03, 2025	Feb. 19, 2026	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	801606/2	9KHz ~ 40GHz	Apr. 22, 2024	Nov. 08, 2024~ Dec. 22, 2024	Apr. 21, 2025	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	801606/2	9KHz ~ 40GHz	Apr. 23, 2025	Jul. 02, 2025 ~ Jul. 03, 2025	Apr. 22, 2026	Radiation (03CH07-HY)
Controller	EMEC	EM1000	N/A	Control Ant Mast	N/A	Nov. 08, 2024~ Jul. 03, 2025	N/A	Radiation (03CH07-HY)
Controller	MF	MF-7802	N/A	Control Turn table	N/A	Nov. 08, 2024~ Jul. 03, 2025	N/A	Radiation (03CH07-HY)



Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Antenna Mast	EMEC	AM-BS-4500E	N/A	Boresight mast 1M~4M	N/A	Nov. 08, 2024~ Jul. 03, 2025	N/A	Radiation (03CH07-HY)
Turn Table	ChainTek	Chaintek 3000	N/A	0~360 Degree	N/A	Nov. 08, 2024~ Jul. 03, 2025	N/A	Radiation (03CH07-HY)
Software	Audix	E3	N/A	N/A	N/A	Nov. 08, 2024~ Jul. 03, 2025	N/A	Radiation (03CH07-HY)
USB Data Logger	TECPEL	TR-32	HE17XB24 95	N/A	Mar. 01, 2024	Nov. 08, 2024~ Dec. 22, 2024	Feb. 28, 2025	Radiation (03CH07-HY)
USB Data Logger	TECPEL	TR-32	HE17XB24 95	N/A	Feb. 24, 2025	Jul. 02, 2025 ~ Jul. 03, 2025	Feb. 23, 2026	Radiation (03CH07-HY)
Spectrum Analyzer	Agilent	N9030A	MY523502 76	3Hz~44GHz	Mar. 26, 2024	Nov. 08, 2024~ Dec. 22, 2024	Mar. 25, 2025	Radiation (03CH07-HY)
Spectrum Analyzer	Agilent	N9030A	MY523502 76	3Hz~44GHz	Mar. 28, 2025	Jul. 02, 2025 ~ Jul. 03, 2025	Mar. 27, 2026	Radiation (03CH07-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	00991	18GHz~40GHz	Jun. 04, 2024	Nov. 08, 2024~ Dec. 22, 2024	Jun. 03, 2025	Radiation (03CH07-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170 251	18GHz~40GHz	Nov. 28, 2024	Jul. 02, 2025 ~ Jul. 03, 2025	Nov. 27, 2025	Radiation (03CH07-HY)
Base Station	Anritsu	MT8821C	626202535 3	LTE FDD/TDD LTE-2CC ULCA/DLCA	Oct. 01, 2024	Oct. 28, 2024~ Aug. 08, 2025	Sep. 30, 2025	Conducted (TH03-HY)
Temperature & Humidity Cabinet Chamber	ESPEC	SH-641	92013720	-40°C ~90°C	Sep. 06, 2024	Oct. 28, 2024~ Aug. 08, 2025	Sep. 05, 2025	Conducted (TH03-HY)
DC Power Supply	GW Instek	GPP-2323	GES90603 7	0V~64V ; 0A~6A	Nov. 27, 2024	Oct. 28, 2024~ Aug. 08, 2025	Nov. 26, 2025	Conducted (TH03-HY)
Coupler	Warison	20dB 25W SMA Directional Coupler	#A	1-18GHz	Jan. 02, 2024	Oct. 28, 2024~ Dec. 31, 2024	Jan. 01, 2025	Conducted (TH03-HY)
Coupler	Warison	20dB 25W SMA Directional Coupler	#A	1-18GHz	Jan. 03, 2025	Jan. 03, 2025~ Aug. 08, 2025	Jan. 02, 2026	Conducted (TH03-HY)
Splitter	Anritsu	K241C	2143398	DC~40GHz	Jun. 13, 2024	Oct. 28, 2024~ Jun. 11, 2025	Jun. 12, 2025	Conducted (TH03-HY)
Splitter	Anritsu	K241C	2143398	DC~40GHz	Jun. 13, 2025	Jun. 13, 2025~ Aug. 08, 2025	Jun. 12, 2026	Conducted (TH03-HY)
Spectrum Analyzer	Rohde & Schwarz	FSV40	101905	10Hz - 40GHz(amp)	Jul. 11, 2024	Oct. 28, 2024~ Jul. 04, 2025	Jul. 10, 2025	Conducted (TH03-HY)
Spectrum Analyzer	Rohde & Schwarz	FSV40	101907	10Hz - 40GHz(amp)	Aug. 22, 2024	Jul. 05, 2025 ~ Aug. 08, 2025	Aug. 21, 2025	Conducted (TH03-HY)
Software	Sporton	LTE Conducted Test Tools	N/A	N/A	N/A	Oct. 28, 2024~ Aug. 08, 2025	N/A	Conducted (TH03-HY)
Hygrometer	TECPEL	DTM-303B	TP210073	-10 ~ 50°C / 20 ~ 95%RH	Jun. 05, 2024	Oct. 28, 2024~ Jun. 03, 2025	Jun. 04, 2025	Conducted (TH03-HY)
Hygrometer	TECPEL	DTM-303B	TP210018	N/A	Oct. 14, 2024	Jun. 04, 2025~ Aug. 08, 2025	Oct. 13, 2025	Conducted (TH03-HY)

6 Measurement Uncertainty

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	6.20 dB
---	---------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 6 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.60 dB
---	---------

Uncertainty of Radiated Emission Measurement (6 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.30 dB
---	---------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.90 dB
---	---------

Appendix A. Test Results of Conducted Test

Conducted Output Power (Average power and EIRP)

Part 96 LTE Band 48 Maximum Average Power [dBm] (GT - LC = 0.5 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP (W)
20	1	0	QPSK	21.90	21.71	22.06	22.56	0.1803
20	1	49		21.92	21.80	22.02		
20	1	99		21.89	21.79	21.95		
20	50	0		20.88	20.67	20.93		
20	50	24		20.86	20.80	21.05		
20	50	50		20.78	20.76	20.99		
20	100	0		20.80	20.75	20.99		
20	1	0	16-QAM	20.79	20.65	20.90	21.63	0.1455
20	1	49		20.92	20.75	21.13		
20	1	99		20.76	20.76	21.03		
20	50	0		19.87	19.70	19.95		
20	50	24		19.82	19.78	20.05		
20	50	50		19.77	19.74	19.98		
20	100	0		19.83	19.72	19.95		
20	1	0	64-QAM	19.70	19.60	19.79	20.47	0.1114
20	1	49		19.80	19.68	19.97		
20	1	99		19.61	19.77	19.76		
20	50	0		18.86	18.65	18.95		
20	50	24		18.88	18.82	19.01		
20	50	50		18.83	18.70	18.98		
20	100	0		18.82	18.72	18.96		
20	1	0	256-QAM	16.64	16.66	16.82	17.57	0.0571
20	1	49		16.73	16.68	16.94		
20	1	99		16.80	16.60	16.82		
20	50	0		16.86	16.63	16.92		
20	50	24		16.82	16.78	17.07		
20	50	50		16.81	16.76	17.04		
20	100	0		16.83	16.68	16.96		
Limit	EIRP < 23dBm/10MHz			Result			Pass	

Total EIRP power is less than partial EIRP limit 23 dBm/10MHz.

Part 96 LTE Band 48 Maximum Average Power [dBm] (GT - LC = 0.5 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP (W)
15	1	0	QPSK	21.80	21.58	21.95	22.45	0.1758
15	1	37		21.72	21.82	21.85		
15	1	74		21.74	21.64	21.87		
15	36	0		20.83	20.67	20.89		
15	36	20		20.85	20.76	20.93		
15	36	39		20.79	20.74	20.98		
15	75	0		20.81	20.67	20.84		
15	1	0	16-QAM	20.78	20.63	21.23	21.73	0.1489
15	1	37		20.83	20.80	21.12		
15	1	74		20.76	20.40	20.52		
15	36	0		19.84	19.64	19.84		
15	36	20		19.85	19.78	19.96		
15	36	39		19.76	19.77	19.94		
15	75	0		19.83	19.70	19.87		
15	1	0	64-QAM	19.87	19.55	20.06	20.56	0.1138
15	1	37		20.00	19.81	19.97		
15	1	74		19.70	19.70	19.87		
15	36	0		18.83	18.75	18.87		
15	36	20		18.87	18.70	18.93		
15	36	39		18.86	18.75	18.98		
15	75	0		18.81	18.69	18.89		
15	1	0	256-QAM	16.60	16.62	16.90	17.48	0.0560
15	1	37		16.69	16.87	16.83		
15	1	74		16.88	16.52	16.85		
15	36	0		16.91	16.71	16.93		
15	36	20		16.88	16.80	16.97		
15	36	39		16.88	16.76	16.98		
15	75	0		16.88	16.78	16.93		
Limit	EIRP < 23dBm/10MHz			Result			Pass	

Total EIRP power is less than partial EIRP limit 23 dBm/10MHz.

Part 96 LTE Band 48 Maximum Average Power [dBm] (GT - LC = 0.5 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP (W)
10	1	0	QPSK	21.58	21.53	21.75	22.51	0.1782
10	1	25		21.88	21.60	21.81		
10	1	49		21.75	21.61	22.01		
10	25	0		20.82	20.69	20.91		
10	25	12		20.93	20.76	21.04		
10	25	25		20.88	20.79	21.00		
10	50	0		20.81	20.82	20.95		
10	1	0	16-QAM	20.87	20.85	20.98	21.59	0.1442
10	1	25		20.93	20.89	21.09		
10	1	49		20.75	20.88	21.08		
10	25	0		19.87	19.70	19.95		
10	25	12		19.88	19.73	20.07		
10	25	25		19.89	19.82	19.98		
10	50	0		19.89	19.81	19.98		
10	1	0	64-QAM	19.89	19.58	19.95	20.49	0.1119
10	1	25		19.94	19.68	19.85		
10	1	49		19.71	19.76	19.99		
10	25	0		18.86	18.64	18.95		
10	25	12		18.83	18.82	18.97		
10	25	25		18.82	18.85	19.07		
10	50	0		18.91	18.83	19.08		
10	1	0	256-QAM	16.66	16.47	16.71	17.62	0.0578
10	1	25		16.89	16.77	16.80		
10	1	49		16.59	16.90	16.79		
10	25	0		16.86	16.70	16.92		
10	25	12		16.92	16.71	17.02		
10	25	25		16.93	16.83	17.12		
10	50	0		16.88	16.76	17.03		
Limit	EIRP < 23dBm/10MHz			Result			Pass	

Total EIRP power is less than partial EIRP limit 23 dBm/10MHz.

Part 96 LTE Band 48 Maximum Average Power [dBm] (GT - LC = 0.5 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP (W)
5	1	0	QPSK	21.81	21.82	21.93	22.46	0.1762
5	1	12		21.91	21.67	21.96		
5	1	24		21.80	21.70	21.87		
5	12	0		20.92	20.73	20.91		
5	12	7		20.90	20.83	21.04		
5	12	13		20.83	20.70	20.99		
5	25	0		20.79	20.74	20.89		
5	1	0	16-QAM	21.12	20.83	20.99	21.74	0.1493
5	1	12		21.21	21.00	21.18		
5	1	24		21.24	20.50	20.91		
5	12	0		19.91	19.77	19.85		
5	12	7		19.92	19.80	19.93		
5	12	13		19.81	19.76	20.05		
5	25	0		19.83	19.66	19.94		
5	1	0	64-QAM	19.52	19.71	20.01	20.51	0.1125
5	1	12		19.67	19.74	19.84		
5	1	24		19.68	19.92	19.86		
5	12	0		18.85	18.69	18.81		
5	12	7		18.83	18.71	18.99		
5	12	13		18.77	18.69	18.88		
5	25	0		18.89	18.73	18.94		
5	1	0	256-QAM	16.84	16.80	16.80	17.64	0.0581
5	1	12		16.78	16.80	17.14		
5	1	24		16.61	16.50	16.73		
5	12	0		16.95	16.84	16.95		
5	12	7		16.83	16.84	17.01		
5	12	13		16.87	16.75	16.99		
5	25	0		16.87	16.78	16.89		
Limit	EIRP < 23dBm/10MHz			Result			Pass	

Total EIRP power is less than partial EIRP limit 23 dBm/10MHz.

Part 96 LTE Band 42 Maximum Average Power [dBm] (GT - LC = 0.5 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP (W)
20	1	0	QPSK	22.03	21.93	21.81	22.53	0.1791
20	1	49		21.87	21.98	21.88		
20	1	99		21.82	21.78	21.90		
20	50	0		20.82	20.76	20.70		
20	50	24		20.87	20.72	20.69		
20	50	50		20.77	20.72	20.72		
20	100	0		20.82	20.74	20.64		
20	1	0	16-QAM	20.84	20.76	20.75	21.44	0.1393
20	1	49		20.93	20.90	20.66		
20	1	99		20.94	20.71	20.69		
20	50	0		19.75	19.76	19.74		
20	50	24		19.87	19.73	19.72		
20	50	50		19.84	19.78	19.72		
20	100	0		19.82	19.74	19.67		
20	1	0	64-QAM	19.74	19.83	19.74	20.33	0.1079
20	1	49		19.79	19.78	19.51		
20	1	99		19.60	19.70	19.50		
20	50	0		18.80	18.82	18.74		
20	50	24		18.88	18.71	18.67		
20	50	50		18.81	18.73	18.73		
20	100	0		18.77	18.67	18.66		
20	1	0	256-QAM	16.70	16.68	16.57	17.41	0.0551
20	1	49		16.69	16.84	16.72		
20	1	99		16.67	16.57	16.57		
20	50	0		16.85	16.80	16.74		
20	50	24		16.91	16.82	16.72		
20	50	50		16.79	16.79	16.74		
20	100	0		16.84	16.75	16.71		
Limit	EIRP < 23dBm/10MHz			Result			Pass	

Total EIRP power is less than partial EIRP limit 23 dBm/10MHz.

Part 96 LTE Band 42 Maximum Average Power [dBm] (GT - LC = 0.5 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP (W)
15	1	0	QPSK	21.82	21.89	21.70	22.39	0.1734
15	1	37		21.77	21.75	21.68		
15	1	74		21.67	21.75	21.84		
15	36	0		20.80	20.78	20.71		
15	36	20		20.82	20.75	20.75		
15	36	39		20.82	20.77	20.70		
15	75	0		20.76	20.67	20.75		
15	1	0	16-QAM	20.88	20.78	20.72	21.46	0.1400
15	1	37		20.96	20.89	20.66		
15	1	74		20.69	20.78	20.68		
15	36	0		19.77	19.79	19.70		
15	36	20		19.82	19.69	19.80		
15	36	39		19.83	19.76	19.66		
15	75	0		19.76	19.73	19.77		
15	1	0	64-QAM	19.65	19.79	19.64	20.30	0.1072
15	1	37		19.77	19.80	19.65		
15	1	74		19.77	19.78	19.67		
15	36	0		18.79	18.77	18.64		
15	36	20		18.81	18.79	18.76		
15	36	39		18.81	18.77	18.72		
15	75	0		18.74	18.73	18.73		
15	1	0	256-QAM	16.70	16.68	16.70	17.39	0.0548
15	1	37		16.84	16.89	16.66		
15	1	74		16.68	16.82	16.61		
15	36	0		16.76	16.75	16.68		
15	36	20		16.80	16.79	16.78		
15	36	39		16.82	16.76	16.68		
15	75	0		16.79	16.75	16.74		
Limit	EIRP < 23dBm/10MHz			Result			Pass	

Total EIRP power is less than partial EIRP limit 23 dBm/10MHz.

Part 96 LTE Band 42 Maximum Average Power [dBm] (GT - LC = 0.5 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP (W)
10	1	0	QPSK	21.77	21.78	21.57	22.44	0.1754
10	1	25		21.65	21.81	21.57		
10	1	49		21.64	21.94	21.59		
10	25	0		20.81	20.95	20.67		
10	25	12		20.83	21.04	20.66		
10	25	25		20.86	21.02	20.77		
10	50	0		20.80	20.96	20.79		
10	1	0	16-QAM	20.81	21.02	20.73	21.61	0.1449
10	1	25		20.80	21.08	20.86		
10	1	49		20.92	21.11	20.87		
10	25	0		19.79	19.96	19.71		
10	25	12		19.80	20.06	19.70		
10	25	25		19.91	20.02	19.82		
10	50	0		19.86	20.04	19.75		
10	1	0	64-QAM	19.92	19.87	19.68	20.66	0.1164
10	1	25		19.75	20.16	19.75		
10	1	49		19.77	19.92	19.55		
10	25	0		18.84	18.99	18.67		
10	25	12		18.88	19.09	18.68		
10	25	25		18.94	19.07	18.78		
10	50	0		18.79	18.99	18.76		
10	1	0	256-QAM	16.84	16.90	16.59	17.53	0.0566
10	1	25		16.80	16.99	16.66		
10	1	49		16.74	17.01	16.62		
10	25	0		16.77	16.92	16.65		
10	25	12		16.83	17.02	16.69		
10	25	25		16.90	17.03	16.76		
10	50	0		16.84	17.00	16.74		
Limit	EIRP < 23dBm/10MHz			Result			Pass	

Total EIRP power is less than partial EIRP limit 23 dBm/10MHz.

Part 96 LTE Band 42 Maximum Average Power [dBm] (GT - LC = 0.5 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP (W)
5	1	0	QPSK	21.84	21.84	21.69	22.38	0.1730
5	1	12		21.79	21.78	21.72		
5	1	24		21.88	21.82	21.69		
5	12	0		20.82	20.76	20.72		
5	12	7		20.86	20.84	20.80		
5	12	13		20.84	20.81	20.75		
5	25	0		20.84	20.68	20.60		
5	1	0	16-QAM	20.83	20.81	20.70	21.43	0.1390
5	1	12		20.93	20.87	20.84		
5	1	24		20.81	20.91	20.84		
5	12	0		19.82	19.73	19.70		
5	12	7		19.86	19.95	19.69		
5	12	13		19.85	19.77	19.75		
5	25	0		19.83	19.83	19.65		
5	1	0	64-QAM	19.93	19.74	19.81	20.43	0.1104
5	1	12		19.78	19.83	19.66		
5	1	24		19.75	19.79	19.68		
5	12	0		18.85	18.80	18.71		
5	12	7		18.87	18.86	18.71		
5	12	13		18.80	18.82	18.72		
5	25	0		18.87	18.79	18.70		
5	1	0	256-QAM	16.69	16.61	16.63	17.46	0.0557
5	1	12		16.96	16.90	16.67		
5	1	24		16.79	16.65	16.71		
5	12	0		16.92	16.82	16.71		
5	12	7		16.89	16.90	16.80		
5	12	13		16.86	16.86	16.79		
5	25	0		16.87	16.81	16.74		
Limit	EIRP < 23dBm/10MHz			Result			Pass	

Total EIRP power is less than partial EIRP limit 23 dBm/10MHz.

Part 96 LTE Band 43 Maximum Average Power [dBm] (GT - LC = 0.5 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP (W)
20	1	0	QPSK	21.63	21.80	22.06	22.56	0.1803
20	1	49		21.61	21.74	21.94		
20	1	99		21.63	21.82	21.94		
20	50	0		20.74	20.90	20.97		
20	50	24		20.79	20.96	21.01		
20	50	50		20.76	20.97	21.02		
20	100	0		20.71	20.93	20.98		
20	1	0	16-QAM	20.74	20.81	21.06	21.63	0.1455
20	1	49		20.81	21.13	21.05		
20	1	99		20.79	20.82	20.91		
20	50	0		19.75	19.93	20.02		
20	50	24		19.85	19.84	20.04		
20	50	50		19.80	20.03	20.08		
20	100	0		19.77	19.87	20.02		
20	1	0	64-QAM	19.60	20.06	19.65	20.56	0.1138
20	1	49		19.63	19.77	19.72		
20	1	99		19.75	19.92	20.03		
20	50	0		18.85	18.94	18.96		
20	50	24		18.76	18.92	19.05		
20	50	50		18.77	18.89	18.89		
20	100	0		18.79	18.96	18.94		
20	1	0	256-QAM	16.57	17.04	17.06	17.67	0.0585
20	1	49		16.73	16.78	17.17		
20	1	99		16.71	16.48	17.05		
20	50	0		16.80	16.92	17.02		
20	50	24		16.84	17.00	17.01		
20	50	50		16.78	16.94	17.03		
20	100	0		16.79	16.94	17.02		
Limit	EIRP < 23dBm/10MHz			Result			Pass	

Total EIRP power is less than partial EIRP limit 23 dBm/10MHz.

Part 96 LTE Band 43 Maximum Average Power [dBm] (GT - LC = 0.5 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP (W)
15	1	0	QPSK	21.55	21.78	21.96	22.46	0.1762
15	1	37		21.52	21.66	21.89		
15	1	74		21.63	21.75	21.91		
15	36	0		20.69	20.84	20.87		
15	36	20		20.73	20.91	20.95		
15	36	39		20.74	20.93	21.01		
15	75	0		20.65	20.83	20.90		
15	1	0	16-QAM	20.73	20.72	21.01	21.61	0.1449
15	1	37		20.77	21.11	21.05		
15	1	74		20.76	20.74	20.87		
15	36	0		19.72	19.93	19.93		
15	36	20		19.82	19.80	19.96		
15	36	39		19.76	20.01	20.06		
15	75	0		19.77	19.87	19.97		
15	1	0	64-QAM	19.52	20.05	19.58	20.55	0.1135
15	1	37		19.63	19.71	19.67		
15	1	74		19.70	19.90	20.03		
15	36	0		18.82	18.84	18.93		
15	36	20		18.68	18.92	18.96		
15	36	39		18.74	18.87	18.87		
15	75	0		18.77	18.96	18.85		
15	1	0	256-QAM	16.48	17.00	17.01	17.66	0.0583
15	1	37		16.63	16.73	17.16		
15	1	74		16.67	16.46	17.00		
15	36	0		16.79	16.87	16.98		
15	36	20		16.77	16.90	16.93		
15	36	39		16.75	16.91	16.95		
15	75	0		16.79	16.90	16.97		
Limit	EIRP < 23dBm/10MHz			Result			Pass	

Total EIRP power is less than partial EIRP limit 23 dBm/10MHz.

Part 96 LTE Band 43 Maximum Average Power [dBm] (GT - LC = 0.5 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP (W)
10	1	0	QPSK	21.56	21.72	22.00	22.50	0.1778
10	1	25		21.61	21.66	21.92		
10	1	49		21.62	21.78	21.89		
10	25	0		20.64	20.85	20.90		
10	25	12		20.70	20.96	20.91		
10	25	25		20.70	20.90	20.94		
10	50	0		20.71	20.89	20.90		
10	1	0	16-QAM	20.68	20.76	20.99	21.61	0.1449
10	1	25		20.80	21.11	21.05		
10	1	49		20.78	20.75	20.87		
10	25	0		19.71	19.92	19.98		
10	25	12		19.77	19.84	19.99		
10	25	25		19.76	19.98	20.07		
10	50	0		19.75	19.81	19.95		
10	1	0	64-QAM	19.53	20.00	19.62	20.50	0.1122
10	1	25		19.62	19.73	19.64		
10	1	49		19.72	19.88	19.96		
10	25	0		18.80	18.89	18.93		
10	25	12		18.66	18.86	18.99		
10	25	25		18.74	18.82	18.84		
10	50	0		18.74	18.92	18.91		
10	1	0	256-QAM	16.48	17.04	17.01	17.67	0.0585
10	1	25		16.67	16.74	17.17		
10	1	49		16.61	16.48	16.99		
10	25	0		16.78	16.85	17.02		
10	25	12		16.77	16.95	16.91		
10	25	25		16.74	16.91	16.95		
10	50	0		16.72	16.87	17.01		
Limit	EIRP < 23dBm/10MHz			Result			Pass	

Total EIRP power is less than partial EIRP limit 23 dBm/10MHz.

Part 96 LTE Band 43 Maximum Average Power [dBm] (GT - LC = 0.5 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP (W)
5	1	0	QPSK	21.55	21.80	21.98	22.48	0.1770
5	1	12		21.60	21.67	21.94		
5	1	24		21.54	21.74	21.91		
5	12	0		20.68	20.89	20.97		
5	12	7		20.79	20.88	21.00		
5	12	13		20.73	20.93	20.95		
5	25	0		20.67	20.89	20.93		
5	1	0	16-QAM	20.73	20.73	20.97	21.63	0.1455
5	1	12		20.78	21.13	21.05		
5	1	24		20.76	20.75	20.82		
5	12	0		19.71	19.91	20.02		
5	12	7		19.82	19.79	20.03		
5	12	13		19.76	19.93	20.00		
5	25	0		19.75	19.85	19.95		
5	1	0	64-QAM	19.56	19.96	19.58	20.49	0.1119
5	1	12		19.62	19.69	19.69		
5	1	24		19.67	19.86	19.99		
5	12	0		18.85	18.86	18.87		
5	12	7		18.68	18.88	18.95		
5	12	13		18.67	18.88	18.80		
5	25	0		18.72	18.86	18.93		
5	1	0	256-QAM	16.51	16.96	17.05	17.62	0.0578
5	1	12		16.72	16.69	17.12		
5	1	24		16.68	16.43	17.03		
5	12	0		16.77	16.85	16.94		
5	12	7		16.82	16.93	16.96		
5	12	13		16.69	16.86	17.02		
5	25	0		16.79	16.87	16.92		
Limit	EIRP < 23dBm/10MHz			Result			Pass	

Total EIRP power is less than partial EIRP limit 23 dBm/10MHz.

Part 96 LTE Band 42C_CA Maximum Average Power [dBm] (GT - LC = 0.5 dB)										
BW [MHz]	PCC		SCC		Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP (W)
	RB Size	RB Offset	RB Size	RB Offset						
20+20	100	0	100	0	QPSK	13.01	12.98	13.01	21.71	0.1483
20+20	1	0	1	99		1.86	1.83	1.78		
20+20	1	99	1	0		21.18	21.21	21.16		
20+20	100	0	100	0	16-QAM	13.00	13.01	12.99	21.46	0.1400
20+20	1	0	1	99		2.32	2.32	2.24		
20+20	1	99	1	0		20.96	20.95	20.86		
20+20	100	0	100	0	64-QAM	13.01	13.02	13.01	19.74	0.0942
20+20	1	0	1	99		2.31	2.35	2.44		
20+20	1	99	1	0		19.12	19.24	19.18		
20+20	100	0	100	0	256-QAM	12.94	13.00	13.02	17.62	0.0578
20+20	1	0	1	99		2.20	2.17	2.19		
20+20	1	99	1	0		17.00	17.10	17.12		
20+15	100	0	75	0	QPSK	13.01	12.99	13.02	21.84	0.1528
20+15	1	0	1	74		1.94	1.91	1.95		
20+15	1	99	1	0		21.34	21.31	21.33		
20+15	100	0	75	0	16-QAM	13.02	13.03	13.05	21.53	0.1422
20+15	1	0	1	74		2.47	2.38	2.50		
20+15	1	99	1	0		21.03	20.93	20.95		
20+15	100	0	75	0	64-QAM	13.05	13.01	12.98	19.75	0.0944
20+15	1	0	1	74		2.38	2.38	2.45		
20+15	1	99	1	0		19.23	19.21	19.25		
20+15	100	0	75	0	256-QAM	12.97	12.92	12.96	17.58	0.0573
20+15	1	0	1	74		2.29	2.24	2.30		
20+15	1	99	1	0		17.07	17.04	17.08		
15+20	75	0	100	0	QPSK	13.03	13.04	13.04	21.87	0.1538
15+20	1	0	1	99		1.88	1.91	1.98		
15+20	1	74	1	0		21.37	21.37	21.34		
15+20	75	0	100	0	16-QAM	13.03	13.01	13.02	21.49	0.1409
15+20	1	0	1	99		2.38	2.45	2.42		
15+20	1	74	1	0		20.93	20.93	20.99		
15+20	75	0	100	0	64-QAM	13.03	13.02	13.04	19.77	0.0948
15+20	1	0	1	99		2.35	2.43	2.49		
15+20	1	74	1	0		19.24	19.20	19.27		
15+20	75	0	100	0	256-QAM	12.99	13.00	12.98	17.59	0.0574
15+20	1	0	1	99		2.15	2.24	2.21		
15+20	1	74	1	0		17.04	17.09	17.04		
Limit	EIRP < 23dBm/10MHz					Result			Pass	

Total EIRP power is less than partial EIRP limit 23 dBm/10MHz.

Part 96 LTE Band 42C_CA Maximum Average Power [dBm] (GT - LC = 0.5 dB)										
BW [MHz]	PCC		SCC		Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP (W)
	RB Size	RB Offset	RB Size	RB Offset						
20+10	100	0	50	0	QPSK	14.02	14.03	14.05	21.86	0.1535
20+10	1	0	1	49		2.00	1.89	2.04		
20+10	1	99	1	0		21.36	21.23	21.36		
20+10	100	0	50	0	16-QAM	14.05	13.99	14.01	21.58	0.1439
20+10	1	0	1	49		2.51	2.33	2.51		
20+10	1	99	1	0		21.08	20.93	21.04		
20+10	100	0	50	0	64-QAM	13.99	13.98	14.00	19.88	0.0973
20+10	1	0	1	49		2.46	2.41	2.54		
20+10	1	99	1	0		19.38	19.09	19.26		
20+10	100	0	50	0	256-QAM	13.99	14.00	13.99	14.50	0.0282
20+10	1	0	1	49		1.87	2.20	2.27		
20+10	1	99	1	0		10.12	10.19	10.13		
10+20	50	0	100	0	QPSK	14.05	14.04	13.95	21.93	0.1560
10+20	1	0	1	99		1.99	1.99	1.97		
10+20	1	49	1	0		21.43	21.36	21.24		
10+20	50	0	100	0	16-QAM	14.06	14.08	14.05	21.59	0.1442
10+20	1	0	1	99		2.47	2.51	2.46		
10+20	1	49	1	0		21.09	20.93	20.91		
10+20	50	0	100	0	64-QAM	14.03	14.00	14.10	19.80	0.0955
10+20	1	0	1	99		2.50	2.50	2.56		
10+20	1	49	1	0		19.28	19.30	19.27		
10+20	50	0	100	0	256-QAM	14.03	13.98	13.89	14.53	0.0284
10+20	1	0	1	99		2.29	2.34	2.31		
10+20	1	49	1	0		10.15	10.14	10.15		
20+5	100	0	25	0	QPSK	14.03	14.03	13.99	17.95	0.0624
20+5	1	0	1	24		2.01	2.01	2.02		
20+5	1	99	1	0		17.44	17.42	17.45		
20+5	100	0	25	0	16-QAM	14.03	13.99	13.98	18.67	0.0736
20+5	1	0	1	24		2.45	2.49	2.51		
20+5	1	99	1	0		18.17	18.08	18.05		
20+5	100	0	25	0	64-QAM	14.01	13.99	14.02	18.83	0.0764
20+5	1	0	1	24		2.50	2.45	2.46		
20+5	1	99	1	0		18.33	18.27	18.16		
20+5	100	0	25	0	256-QAM	13.98	13.97	13.98	17.64	0.0581
20+5	1	0	1	24		2.25	2.26	2.25		
20+5	1	99	1	0		17.12	17.14	17.10		
Limit	EIRP < 23dBm/10MHz					Result			Pass	

Total EIRP power is less than partial EIRP limit 23 dBm/10MHz.

Part 96 LTE Band 42C_CA Maximum Average Power [dBm] (GT - LC = 0.5 dB)										
BW [MHz]	PCC		SCC		Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP (W)
	RB Size	RB Offset	RB Size	RB Offset						
5+20	25	0	100	0	QPSK	14.03	14.02	14.01	17.98	0.0628
5+20	1	0	1	99		1.93	1.98	1.94		
5+20	1	24	1	0		17.42	17.45	17.48		
5+20	25	0	100	0	16-QAM	14.07	14.05	14.10	18.63	0.0729
5+20	1	0	1	99		2.46	2.51	2.51		
5+20	1	24	1	0		18.09	18.13	18.11		
5+20	25	0	100	0	64-QAM	13.98	14.01	14.04	18.96	0.0787
5+20	1	0	1	99		2.40	2.50	2.48		
5+20	1	24	1	0		18.32	18.42	18.46		
5+20	25	0	100	0	256-QAM	14.04	14.01	14.02	17.73	0.0593
5+20	1	0	1	99		2.24	2.29	2.23		
5+20	1	24	1	0		17.23	17.19	17.18		
Limit	EIRP < 23dBm/10MHz					Result			Pass	

Total EIRP power is less than partial EIRP limit 23 dBm/10MHz.

Part 96 LTE Band 43C_CA Maximum Average Power [dBm] (GT - LC = 0.5 dB)										
BW [MHz]	PCC		SCC		Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP (W)
	RB Size	RB Offset	RB Size	RB Offset						
20+20	100	0	100	0	QPSK	20.18	20.16	20.19	22.15	0.1641
20+20	1	0	1	99		6.63	6.55	6.60		
20+20	1	99	1	0		21.60	21.61	21.65		
20+20	100	0	100	0	16-QAM	19.24	19.20	19.26	21.80	0.1514
20+20	1	0	1	99		7.15	7.00	7.07		
20+20	1	99	1	0		21.22	21.25	21.30		
20+20	100	0	100	0	64-QAM	19.24	19.20	19.21	20.06	0.1014
20+20	1	0	1	99		7.14	7.05	6.96		
20+20	1	99	1	0		19.56	19.51	19.52		
20+20	100	0	100	0	256-QAM	17.18	17.18	17.26	17.86	0.0611
20+20	1	0	1	99		6.90	6.84	6.91		
20+20	1	99	1	0		17.36	17.30	17.36		
20+15	100	0	75	0	QPSK	20.17	20.15	20.16	22.09	0.1618
20+15	1	0	1	74		6.60	6.56	6.57		
20+15	1	99	1	0		21.56	21.59	21.59		
20+15	100	0	75	0	16-QAM	19.21	19.18	19.18	21.85	0.1531
20+15	1	0	1	74		7.17	7.03	7.08		
20+15	1	99	1	0		21.31	21.35	21.29		
20+15	100	0	75	0	64-QAM	19.20	19.13	19.10	20.06	0.1014
20+15	1	0	1	74		7.07	7.03	7.08		
20+15	1	99	1	0		19.52	19.56	19.46		
20+15	100	0	75	0	256-QAM	17.19	17.14	17.19	17.87	0.0612
20+15	1	0	1	74		6.91	6.84	6.93		
20+15	1	99	1	0		17.36	17.30	17.37		
15+20	75	0	100	0	QPSK	20.18	20.18	20.17	22.14	0.1637
15+20	1	0	1	99		6.60	6.55	6.54		
15+20	1	74	1	0		21.60	21.63	21.64		
15+20	75	0	100	0	16-QAM	19.23	19.18	19.16	21.82	0.1521
15+20	1	0	1	99		7.14	7.06	7.09		
15+20	1	74	1	0		21.31	21.31	21.32		
15+20	75	0	100	0	64-QAM	19.26	19.20	19.18	20.03	0.1007
15+20	1	0	1	99		7.10	6.95	7.05		
15+20	1	74	1	0		19.53	19.52	19.48		
15+20	75	0	100	0	256-QAM	17.24	17.19	17.21	17.79	0.0601
15+20	1	0	1	99		6.86	6.84	6.85		
15+20	1	74	1	0		17.29	17.28	17.27		
Limit	EIRP < 23dBm/10MHz					Result			Pass	

Total EIRP power is less than partial EIRP limit 23 dBm/10MHz.

Part 96 LTE Band 43C_CA Maximum Average Power [dBm] (GT - LC = 0.5 dB)										
BW [MHz]	PCC		SCC		Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP (W)
	RB Size	RB Offset	RB Size	RB Offset						
20+10	100	0	50	0	QPSK	20.16	20.17	20.23	22.20	0.1660
20+10	1	0	1	49		6.66	6.65	6.68		
20+10	1	99	1	0		21.65	21.69	21.70		
20+10	100	0	50	0	16-QAM	19.22	19.22	19.23	21.93	0.1560
20+10	1	0	1	49		7.16	7.13	7.21		
20+10	1	99	1	0		21.31	21.37	21.43		
20+10	100	0	50	0	64-QAM	19.18	19.22	19.24	20.04	0.1009
20+10	1	0	1	49		7.05	7.08	7.13		
20+10	1	99	1	0		19.47	19.54	19.54		
20+10	100	0	50	0	256-QAM	17.19	17.22	17.23	17.86	0.0611
20+10	1	0	1	49		6.97	6.96	6.96		
20+10	1	99	1	0		17.36	17.33	17.35		
10+20	50	0	100	0	QPSK	20.23	20.18	20.21	22.35	0.1718
10+20	1	0	1	99		6.70	6.69	6.67		
10+20	1	49	1	0		21.85	21.84	21.84		
10+20	50	0	100	0	16-QAM	19.28	19.27	19.28	22.00	0.1585
10+20	1	0	1	99		7.16	7.13	7.16		
10+20	1	49	1	0		21.42	21.43	21.50		
10+20	50	0	100	0	64-QAM	19.22	19.20	19.22	20.10	0.1023
10+20	1	0	1	99		7.07	7.10	7.24		
10+20	1	49	1	0		19.57	19.50	19.60		
10+20	50	0	100	0	256-QAM	17.27	17.25	17.23	18.19	0.0659
10+20	1	0	1	99		6.96	6.94	6.98		
10+20	1	49	1	0		17.35	17.69	17.35		
20+5	100	0	25	0	QPSK	20.20	20.18	20.22	22.19	0.1656
20+5	1	0	1	24		6.66	6.62	6.67		
20+5	1	99	1	0		21.65	21.69	21.69		
20+5	100	0	25	0	16-QAM	19.24	19.18	19.22	21.88	0.1542
20+5	1	0	1	24		7.22	7.12	7.19		
20+5	1	99	1	0		21.31	21.35	21.38		
20+5	100	0	25	0	64-QAM	19.22	19.18	19.18	20.05	0.1012
20+5	1	0	1	24		7.18	7.08	7.04		
20+5	1	99	1	0		19.51	19.53	19.55		
20+5	100	0	25	0	256-QAM	17.18	17.19	17.24	17.86	0.0611
20+5	1	0	1	24		6.76	6.86	6.96		
20+5	1	99	1	0		17.25	17.32	17.36		
Limit	EIRP < 23dBm/10MHz					Result			Pass	

Total EIRP power is less than partial EIRP limit 23 dBm/10MHz.

Part 96 LTE Band 43C_CA Maximum Average Power [dBm] (GT - LC = 0.5 dB)										
BW [MHz]	PCC		SCC		Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP (W)
	RB Size	RB Offset	RB Size	RB Offset						
5+20	25	0	100	0	QPSK	20.21	20.18	20.24	22.33	0.1710
5+20	1	0	1	99		6.61	6.66	6.61		
5+20	1	24	1	0		21.83	21.77	21.83		
5+20	25	0	100	0	16-QAM	19.25	19.21	19.26	21.95	0.1567
5+20	1	0	1	99		7.18	7.12	7.15		
5+20	1	24	1	0		21.42	21.37	21.45		
5+20	25	0	100	0	64-QAM	19.23	19.21	19.22	20.07	0.1016
5+20	1	0	1	99		7.13	7.03	7.07		
5+20	1	24	1	0		19.57	19.54	19.49		
5+20	25	0	100	0	256-QAM	17.25	16.78	17.25	17.86	0.0611
5+20	1	0	1	99		6.95	6.91	6.90		
5+20	1	24	1	0		17.36	17.35	17.34		
15+10	75	0	50	0	QPSK	20.20	20.18	20.21	22.18	0.1652
15+10	1	0	1	49		6.66	6.62	6.63		
15+10	1	74	1	0		21.68	21.68	21.67		
15+10	75	0	50	0	16-QAM	19.26	19.19	19.24	21.94	0.1563
15+10	1	0	1	49		7.11	7.19	7.17		
15+10	1	74	1	0		21.33	21.34	21.44		
15+10	75	0	50	0	64-QAM	19.25	19.22	19.25	20.08	0.1019
15+10	1	0	1	49		7.10	7.17	7.13		
15+10	1	74	1	0		19.57	19.54	19.58		
15+10	75	0	50	0	256-QAM	17.27	17.22	17.24	17.92	0.0619
15+10	1	0	1	49		6.98	6.91	6.88		
15+10	1	74	1	0		17.39	17.42	17.32		
10+15	50	0	75	0	QPSK	20.17	20.20	20.18	22.16	0.1644
10+15	1	0	1	74		6.63	6.62	6.68		
10+15	1	49	1	0		21.65	21.65	21.66		
10+15	50	0	75	0	16-QAM	19.27	19.20	19.26	21.86	0.1535
10+15	1	0	1	74		7.11	7.12	7.17		
10+15	1	49	1	0		21.30	21.36	21.34		
10+15	50	0	75	0	64-QAM	19.26	19.22	19.21	20.08	0.1019
10+15	1	0	1	74		7.14	7.11	6.99		
10+15	1	49	1	0		19.54	19.45	19.58		
10+15	50	0	75	0	256-QAM	17.21	17.22	17.25	17.94	0.0622
10+15	1	0	1	74		6.91	6.88	6.93		
10+15	1	49	1	0		17.38	17.38	17.44		
Limit	EIRP < 23dBm/10MHz					Result			Pass	

Total EIRP power is less than partial EIRP limit 23 dBm/10MHz.

Part 96 LTE Band 43C_CA Maximum Average Power [dBm] (GT - LC = 0.5 dB)										
BW [MHz]	PCC		SCC		Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP (W)
	RB Size	RB Offset	RB Size	RB Offset						
15+15	75	0	75	0	QPSK	20.09	20.07	20.11	22.11	0.1626
15+15	1	0	1	74		6.63	6.58	6.61		
15+15	1	74	1	0		21.60	21.61	21.60		
15+15	75	0	75	0	16-QAM	19.20	19.18	19.19	21.80	0.1514
15+15	1	0	1	74		7.22	7.13	7.13		
15+15	1	74	1	0		21.30	21.29	21.28		
15+15	75	0	75	0	64-QAM	19.16	19.16	19.19	20.05	0.1012
15+15	1	0	1	74		7.11	7.12	7.10		
15+15	1	74	1	0		19.52	19.52	19.55		
15+15	75	0	75	0	256-QAM	17.23	17.22	17.22	17.86	0.0611
15+15	1	0	1	74		6.91	6.86	6.96		
15+15	1	74	1	0		17.28	17.32	17.36		
Limit	EIRP < 23dBm/10MHz					Result			Pass	

Total EIRP power is less than partial EIRP limit 23 dBm/10MHz.

Part 96 LTE Band 48C_CA Maximum Average Power [dBm] (GT - LC = 0.5 dB)										
BW [MHz]	PCC		SCC		Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP (W)
	RB Size	RB Offset	RB Size	RB Offset						
20+20	100	0	100	0	QPSK	11.13	17.64	11.24	20.57	0.1140
20+20	1	0	1	99		3.63	10.11	3.67		
20+20	1	99	1	0		16.84	20.07	16.25		
20+20	100	0	100	0	16-QAM	11.24	17.71	11.22	21.58	0.1439
20+20	1	0	1	99		4.46	11.05	4.69		
20+20	1	99	1	0		17.69	21.08	17.63		
20+20	100	0	100	0	64-QAM	11.15	17.68	11.17	19.78	0.0951
20+20	1	0	1	99		4.51	10.92	4.44		
20+20	1	99	1	0		17.91	19.28	17.49		
20+20	100	0	100	0	256-QAM	11.23	17.24	11.19	17.86	0.0611
20+20	1	0	1	99		4.36	10.86	4.34		
20+20	1	99	1	0		17.21	17.14	17.36		
20+15	100	0	75	0	QPSK	11.33	17.64	11.11	20.62	0.1153
20+15	1	0	1	74		3.70	10.15	3.57		
20+15	1	99	1	0		15.59	20.12	15.33		
20+15	100	0	75	0	16-QAM	11.30	17.70	11.14	21.68	0.1472
20+15	1	0	1	74		4.78	10.98	4.56		
20+15	1	99	1	0		16.48	21.18	16.31		
20+15	100	0	75	0	64-QAM	11.27	17.77	11.09	19.85	0.0966
20+15	1	0	1	74		4.62	11.11	4.35		
20+15	1	99	1	0		16.46	19.35	16.39		
20+15	100	0	75	0	256-QAM	11.30	17.22	11.12	17.72	0.0592
20+15	1	0	1	74		4.50	10.96	4.37		
20+15	1	99	1	0		16.37	17.14	16.15		
15+20	75	0	100	0	QPSK	11.41	17.69	11.35	20.59	0.1146
15+20	1	0	1	99		3.69	10.15	3.63		
15+20	1	74	1	0		15.50	20.09	15.24		
15+20	75	0	100	0	16-QAM	11.38	17.71	11.41	21.78	0.1507
15+20	1	0	1	99		4.74	11.23	4.85		
15+20	1	74	1	0		16.42	21.28	16.55		
15+20	75	0	100	0	64-QAM	11.36	17.78	11.44	19.97	0.0993
15+20	1	0	1	99		4.63	11.23	4.93		
15+20	1	74	1	0		16.52	19.47	16.51		
15+20	75	0	100	0	256-QAM	11.36	17.26	11.45	17.84	0.0608
15+20	1	0	1	99		4.51	11.03	4.64		
15+20	1	74	1	0		16.38	17.34	16.31		
Limit	EIRP < 23dBm/10MHz					Result			Pass	

Total EIRP power is less than partial EIRP limit 23 dBm/10MHz.

Part 96 LTE Band 48C_CA Maximum Average Power [dBm] (GT - LC = 0.5 dB)										
BW [MHz]	PCC		SCC		Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP (W)
	RB Size	RB Offset	RB Size	RB Offset						
20+10	100	0	50	0	QPSK	11.36	17.73	11.40	20.26	0.1062
20+10	1	0	1	49		3.78	10.22	3.68		
20+10	1	99	1	0		15.66	19.76	15.45		
20+10	100	0	50	0	16-QAM	11.37	17.71	11.38	21.41	0.1384
20+10	1	0	1	49		4.91	11.33	4.72		
20+10	1	99	1	0		16.48	20.91	16.60		
20+10	100	0	50	0	64-QAM	11.34	17.71	11.33	20.06	0.1014
20+10	1	0	1	49		4.75	10.90	4.87		
20+10	1	99	1	0		16.59	19.56	16.59		
20+10	100	0	50	0	256-QAM	11.36	17.20	11.33	17.95	0.0624
20+10	1	0	1	49		4.66	11.26	4.64		
20+10	1	99	1	0		16.38	17.45	16.41		
10+20	50	0	100	0	QPSK	11.32	17.70	11.30	20.24	0.1057
10+20	1	0	1	99		3.78	10.23	3.69		
10+20	1	49	1	0		15.59	19.74	15.32		
10+20	50	0	100	0	16-QAM	11.37	17.68	11.30	21.27	0.1340
10+20	1	0	1	99		4.72	11.24	4.78		
10+20	1	49	1	0		16.41	20.77	16.59		
10+20	50	0	100	0	64-QAM	11.30	17.71	11.28	20.01	0.1002
10+20	1	0	1	99		4.70	11.18	4.75		
10+20	1	49	1	0		16.51	19.51	16.37		
10+20	50	0	100	0	256-QAM	11.33	17.24	11.30	17.84	0.0608
10+20	1	0	1	99		4.27	11.16	4.51		
10+20	1	49	1	0		16.29	17.34	16.25		
20+5	100	0	25	0	QPSK	9.92	18.15	10.25	19.99	0.0998
20+5	1	0	1	24		3.81	10.30	3.68		
20+5	1	99	1	0		16.55	19.49	16.73		
20+5	100	0	25	0	16-QAM	10.07	18.21	10.27	20.76	0.1191
20+5	1	0	1	24		4.73	11.18	4.56		
20+5	1	99	1	0		17.06	20.26	17.25		
20+5	100	0	25	0	64-QAM	10.11	18.21	10.26	20	0.1000
20+5	1	0	1	24		4.60	11.13	4.67		
20+5	1	99	1	0		17.22	19.50	17.53		
20+5	100	0	25	0	256-QAM	10.22	17.19	10.16	18.37	0.0687
20+5	1	0	1	24		4.35	10.99	4.39		
20+5	1	99	1	0		17.87	17.23	17.51		
Limit	EIRP < 23dBm/10MHz					Result			Pass	

Total EIRP power is less than partial EIRP limit 23 dBm/10MHz.

Part 96 LTE Band 48C_CA Maximum Average Power [dBm] (GT - LC = 0.5 dB)										
BW [MHz]	PCC		SCC		Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP (W)
	RB Size	RB Offset	RB Size	RB Offset						
5+20	25	0	100	0	QPSK	9.96	18.23	9.94	19.82	0.0959
5+20	1	0	1	99		3.76	10.21	3.69		
5+20	1	24	1	0		16.08	19.32	16.03		
5+20	25	0	100	0	16-QAM	10.00	18.28	9.94	20.68	0.1169
5+20	1	0	1	99		4.36	10.86	4.34		
5+20	1	24	1	0		16.38	20.18	16.64		
5+20	25	0	100	0	64-QAM	9.97	18.29	9.93	19.77	0.0948
5+20	1	0	1	99		4.33	10.85	4.29		
5+20	1	24	1	0		16.56	19.27	16.61		
5+20	25	0	100	0	256-QAM	10.01	17.26	9.90	17.76	0.0597
5+20	1	0	1	99		4.02	10.71	4.13		
5+20	1	24	1	0		16.56	16.97	16.68		
Limit	EIRP < 23dBm/10MHz					Result			Pass	

Total EIRP power is less than partial EIRP limit 23 dBm/10MHz.

Part 96 LTE Band 48B_CA Maximum Average Power [dBm] (GT - LC = 0.5 dB)										
BW [MHz]	PCC		SCC		Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP (W)
	RB Size	RB Offset	RB Size	RB Offset						
10+10	50	0	50	0	QPSK	20.11	20.12	20.17	22.37	0.1726
10+10	1	0	1	49		11.62	11.66	11.69		
10+10	1	49	1	0		21.76	21.82	21.87		
10+10	50	0	50	0	16-QAM	19.15	19.18	19.23	21.98	0.1578
10+10	1	0	1	49		12.10	12.01	12.14		
10+10	1	49	1	0		21.36	21.40	21.48		
10+10	50	0	50	0	64-QAM	19.16	19.17	19.23	19.99	0.0998
10+10	1	0	1	49		11.99	12.06	12.18		
10+10	1	49	1	0		19.49	19.38	19.46		
10+10	50	0	50	0	256-QAM	17.16	17.20	17.26	17.81	0.0604
10+10	1	0	1	49		11.82	11.88	11.92		
10+10	1	49	1	0		17.31	17.21	17.23		
Limit	EIRP < 23dBm/10MHz					Result			Pass	

Total EIRP power is less than partial EIRP limit 23 dBm/10MHz.

LTE Band 42C

26dB Bandwidth

Mode	LTE Band 42C : 26dB BW(MHz)			
QPSK				
BW	5MHz+20MHz	10MHz+20MHz	15MHz+20MHz	20MHz+5MHz
Middle CH	24.90	29.82	35.00	25.00
BW	20MHz+10MHz	20MHz+15MHz	20MHz+20MHz	N/A
Middle CH	30.06	34.86	39.84	-

Mode	LTE Band 42C : 26dB BW(MHz)			
16QAM				
BW	5MHz+20MHz	10MHz+20MHz	15MHz+20MHz	20MHz+5MHz
Middle CH	24.80	30.12	35.00	25.05
BW	20MHz+10MHz	20MHz+15MHz	20MHz+20MHz	N/A
Middle CH	30.00	35.14	40.16	-

Mode	LTE Band 42C : 26dB BW(MHz)			
64QAM				
BW	5MHz+20MHz	10MHz+20MHz	15MHz+20MHz	20MHz+5MHz
Middle CH	24.80	29.88	34.72	25.05
BW	20MHz+10MHz	20MHz+15MHz	20MHz+20MHz	N/A
Middle CH	30.00	34.86	40.40	-


Mode	LTE Band 42C : 26dB BW(MHz)			
256QAM				
BW	5MHz+20MHz	10MHz+20MHz	15MHz+20MHz	20MHz+5MHz
Middle CH	24.75	30.00	34.93	25.00
BW	20MHz+10MHz	20MHz+15MHz	20MHz+20MHz	N/A
Middle CH	30.06	35.07	39.92	-




LTE Band 42C

QPSK


Middle Channel / 5MHz+20MHz

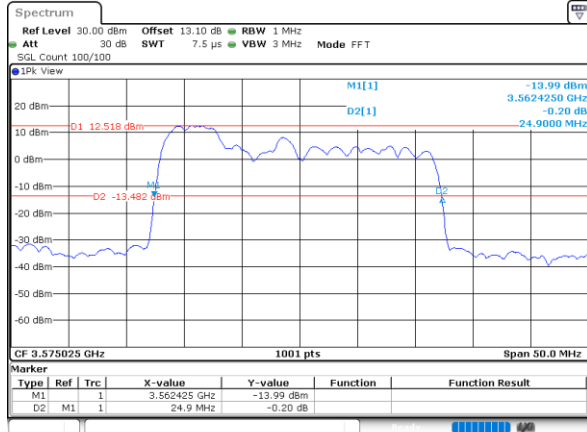


Middle Channel / 10MHz+20MHz

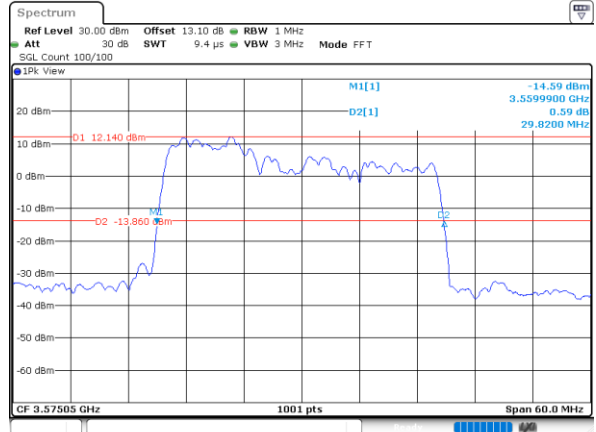


Middle Channel / 15MHz+20MHz

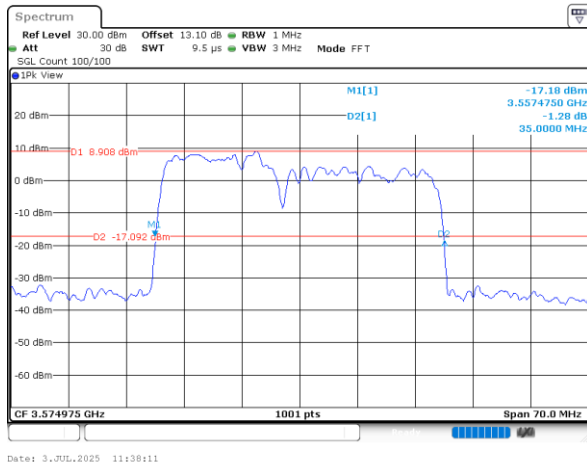


Middle Channel / 20MHz+5MHz

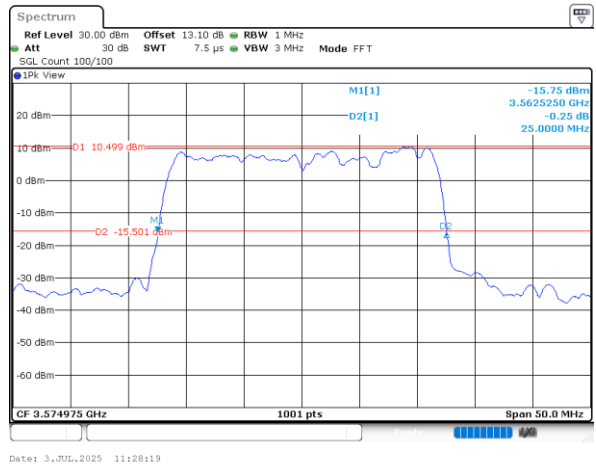


Middle Channel / 20MHz+10MHz

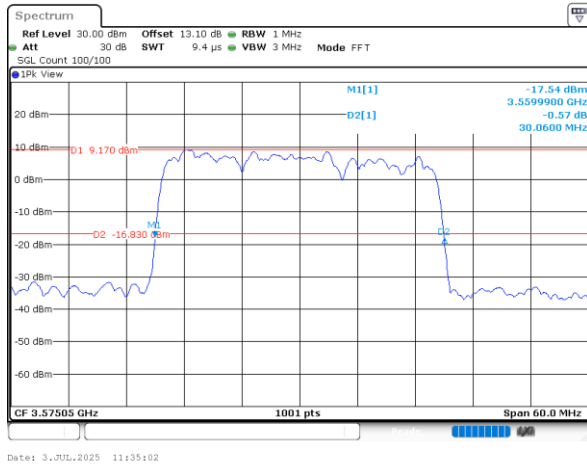

Middle Channel / 20MHz+15MHz

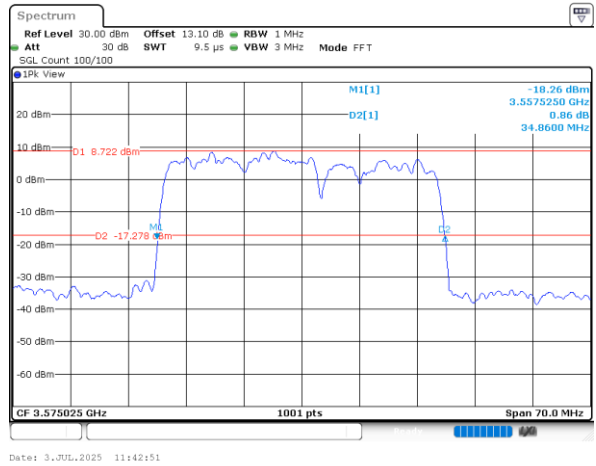

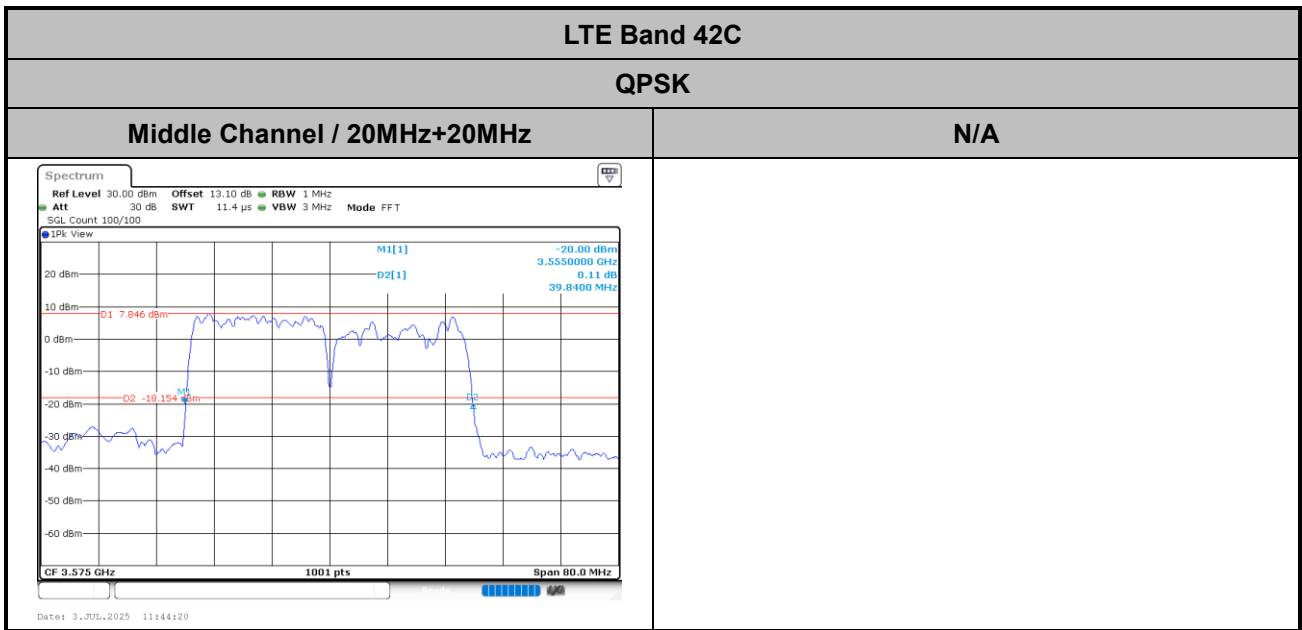




LTE Band 42C


16QAM

Middle Channel / 5MHz+20MHz

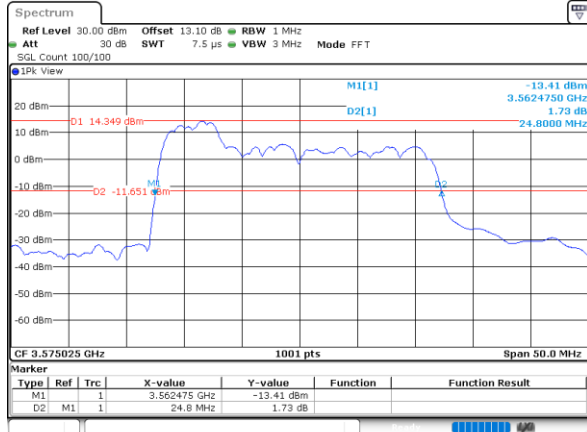


Date: 2,JUL,2025 17:19:09

Middle Channel / 10MHz+20MHz

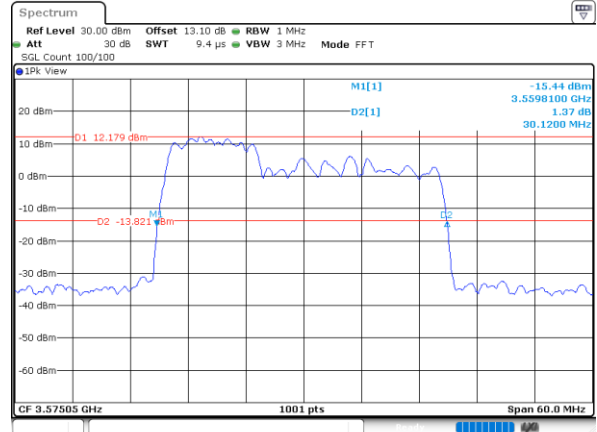


Date: 3,JUL,2025 11:32:14

Middle Channel / 15MHz+20MHz

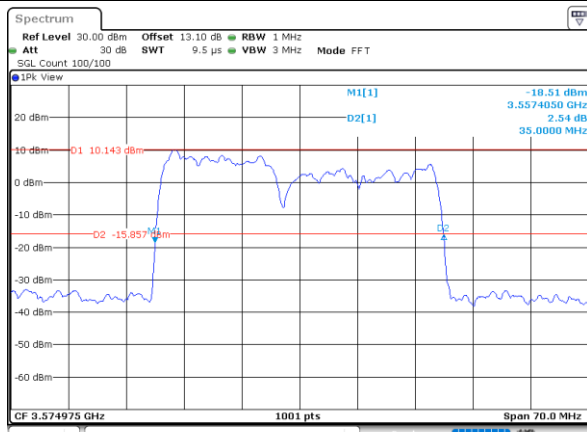


Date: 3,JUL,2025 11:38:58

Middle Channel / 20MHz+5MHz

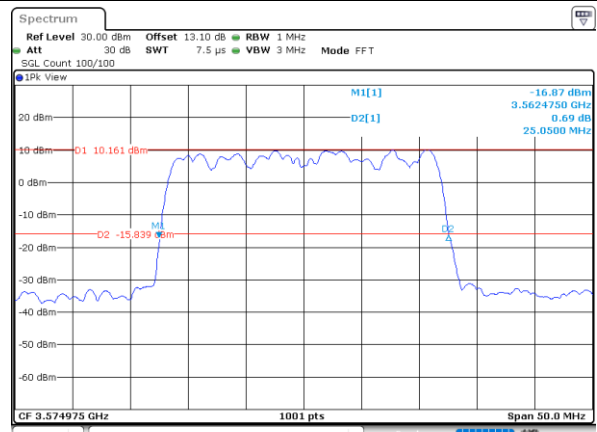


Date: 3,JUL,2025 11:29:02

Middle Channel / 20MHz+10MHz

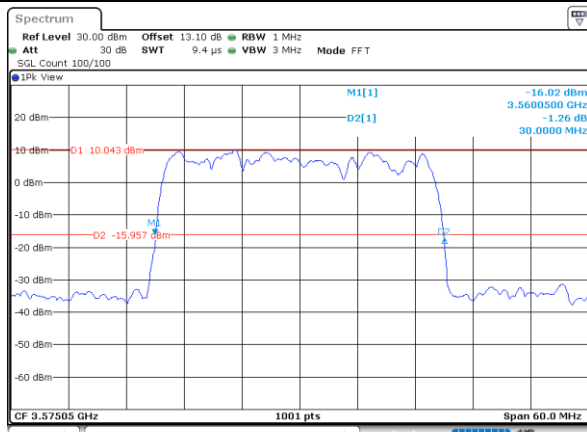


Date: 3,JUL,2025 11:35:47

Middle Channel / 20MHz+15MHz

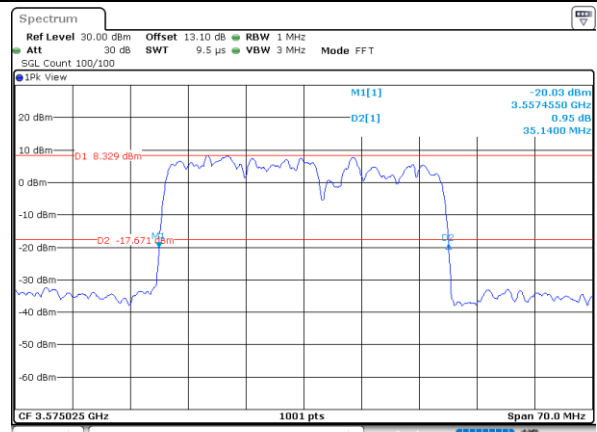

Date: 3,JUL,2025 11:42:07

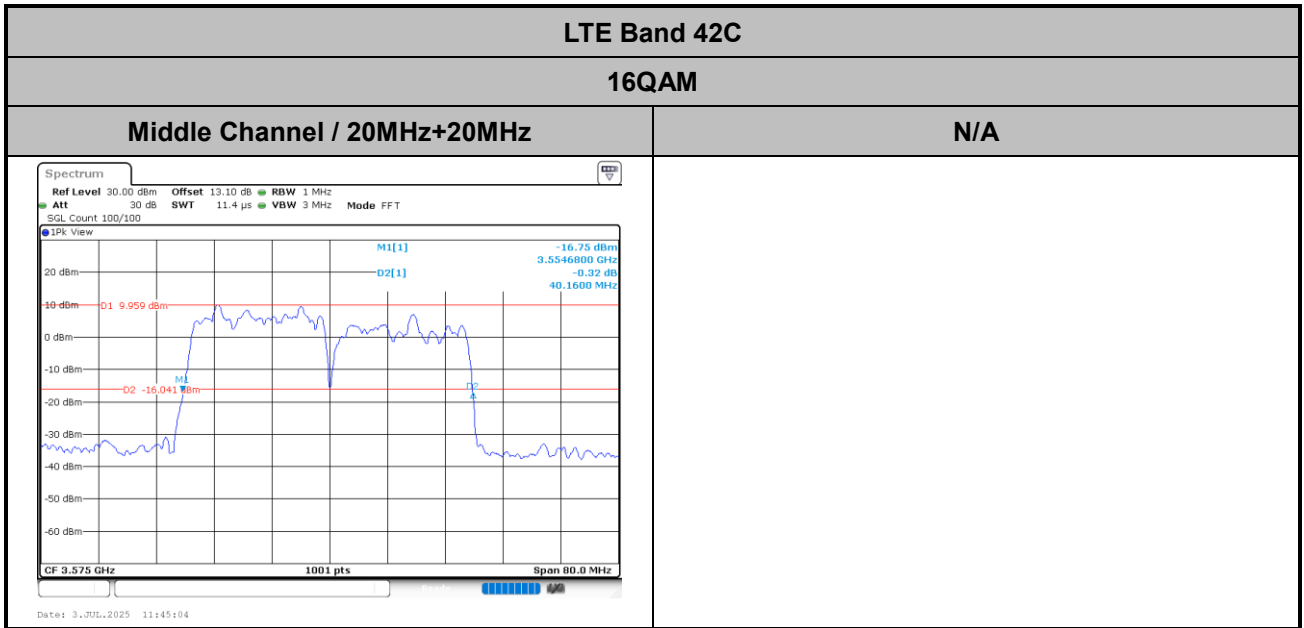





LTE Band 42C

64QAM


Middle Channel / 5MHz+20MHz

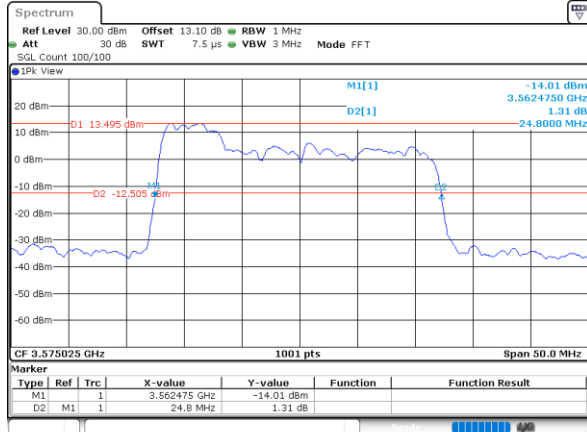


Middle Channel / 10MHz+20MHz

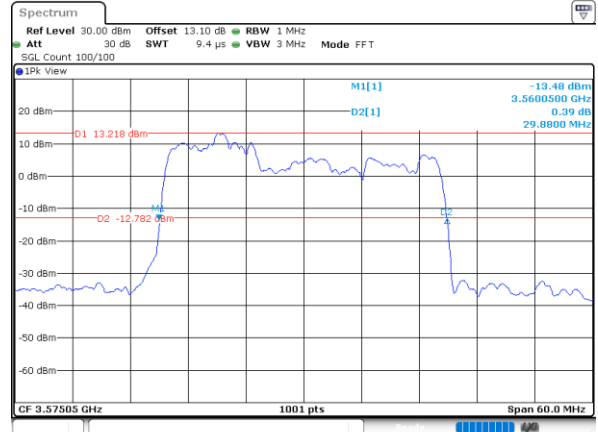


Middle Channel / 15MHz+20MHz

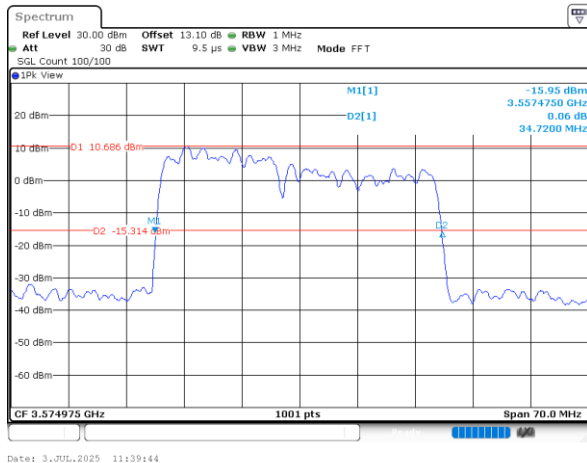


Middle Channel / 20MHz+5MHz

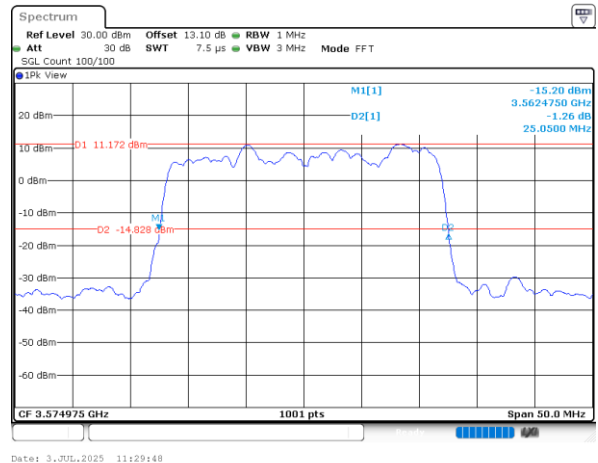


Middle Channel / 20MHz+10MHz

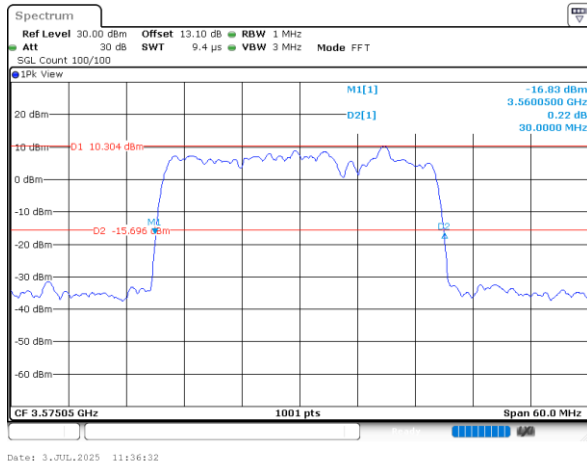

Middle Channel / 20MHz+15MHz

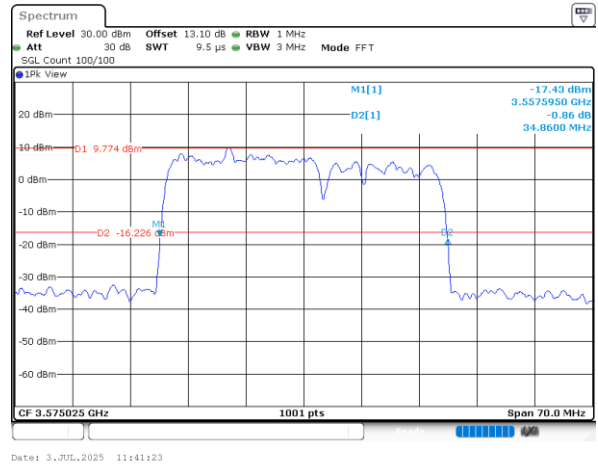

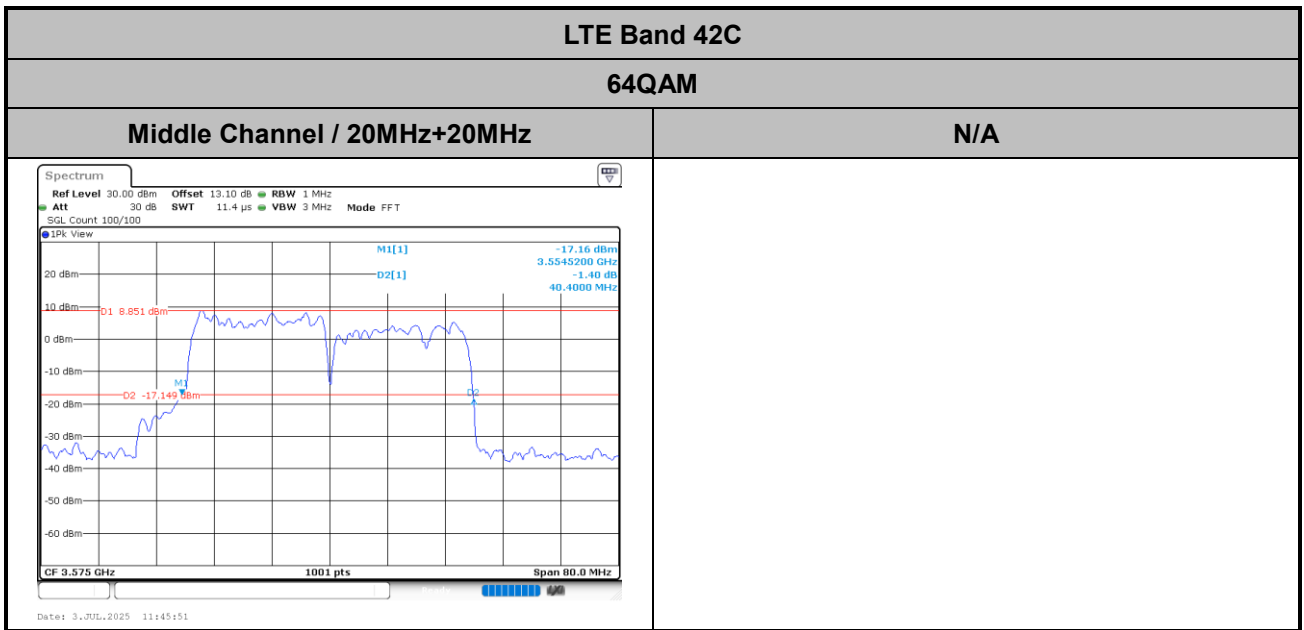




LTE Band 42C


256QAM

Middle Channel / 5MHz+20MHz

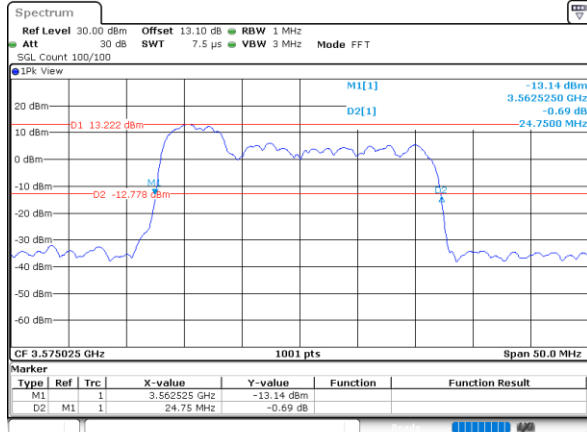


Date: 2,JUL,2025 17:20:40

Middle Channel / 10MHz+20MHz

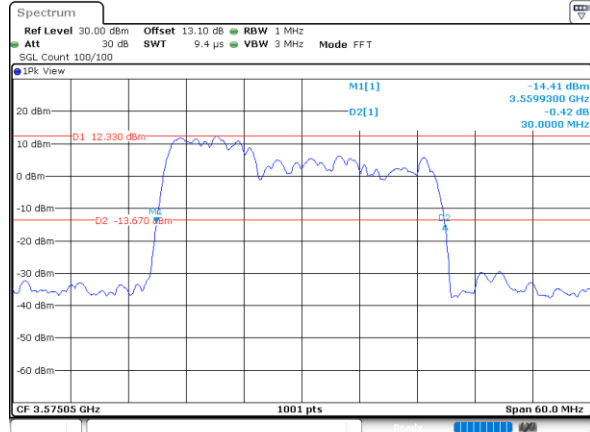


Date: 3,JUL,2025 11:33:47

Middle Channel / 15MHz+20MHz

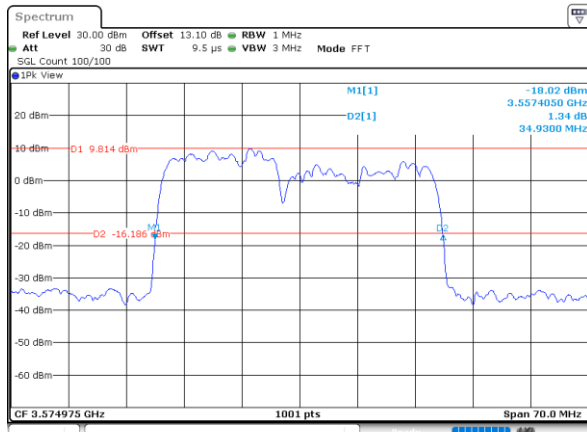

Date: 3,JUL,2025 11:40:27

Middle Channel / 20MHz+5MHz

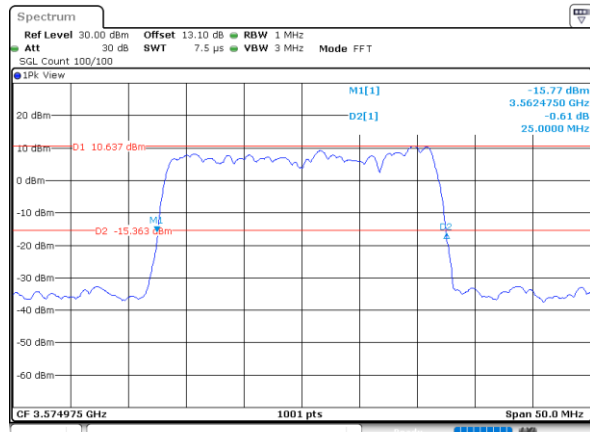


Date: 3,JUL,2025 11:30:33

Middle Channel / 20MHz+10MHz




Date: 3,JUL,2025 11:37:15

Middle Channel / 20MHz+15MHz

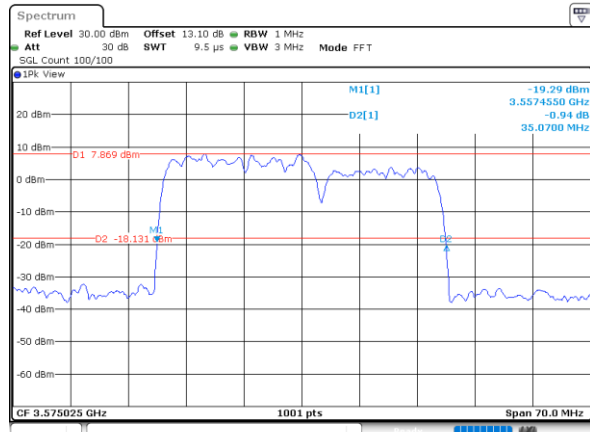

Date: 3,JUL,2025 11:43:34

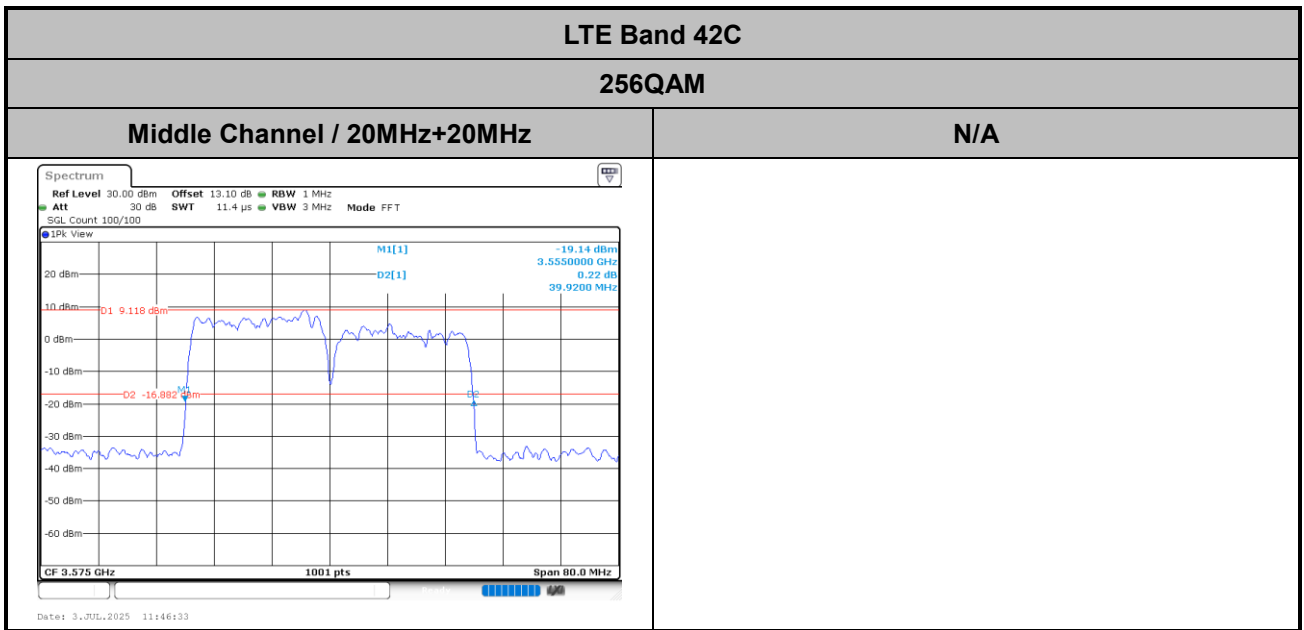

Occupied Bandwidth

Mode	LTE Band 42C : 99%OBW(MHz)			
QPSK				
BW	5MHz+20MHz	10MHz+20MHz	15MHz+20MHz	20MHz+5MHz
Middle CH	23.05	27.81	33.09	23.42
BW	20MHz+10MHz	20MHz+15MHz	20MHz+20MHz	N/A
Middle CH	27.86	32.42	37.97	-

Mode	LTE Band 42C : 99%OBW(MHz)			
16QAM				
BW	5MHz+20MHz	10MHz+20MHz	15MHz+20MHz	20MHz+5MHz
Middle CH	23.12	27.72	32.91	23.14
BW	20MHz+10MHz	20MHz+15MHz	20MHz+20MHz	N/A
Middle CH	28.17	32.54	37.36	-

Mode	LTE Band 42C : 99%OBW(MHz)			
64QAM				
BW	5MHz+20MHz	10MHz+20MHz	15MHz+20MHz	20MHz+5MHz
Middle CH	22.67	27.92	32.65	23.23
BW	20MHz+10MHz	20MHz+15MHz	20MHz+20MHz	N/A
Middle CH	28.02	32.68	37.70	-


Mode	LTE Band 42C : 99%OBW(MHz)			
256QAM				
BW	5MHz+20MHz	10MHz+20MHz	15MHz+20MHz	20MHz+5MHz
Middle CH	22.82	27.93	33.07	23.18
BW	20MHz+10MHz	20MHz+15MHz	20MHz+20MHz	N/A
Middle CH	28.13	32.92	37.69	-




LTE Band 42C

QPSK


Middle Channel / 5MHz+20MHz

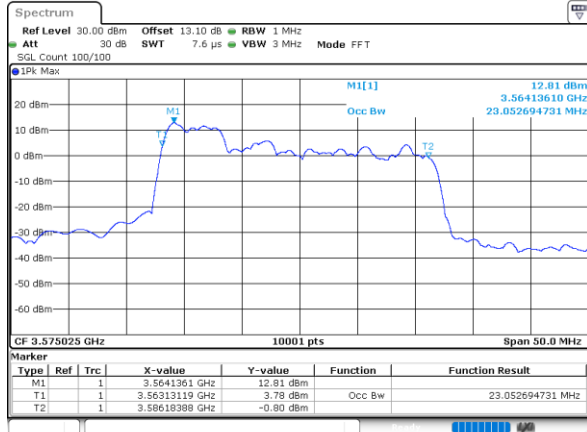


Middle Channel / 10MHz+20MHz

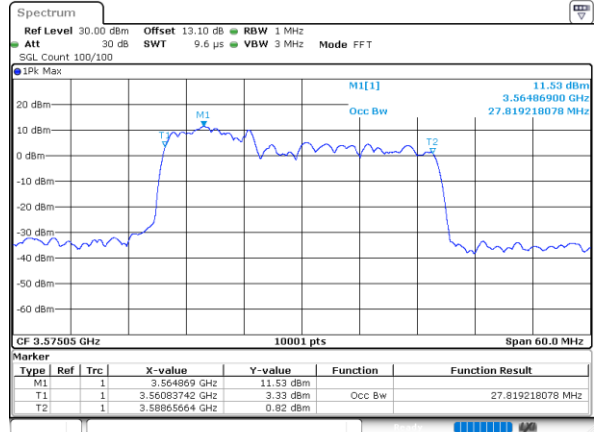


Middle Channel / 15MHz+20MHz

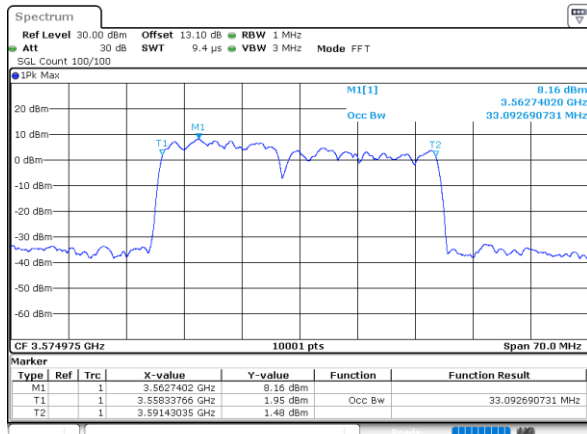


Middle Channel / 20MHz+5MHz

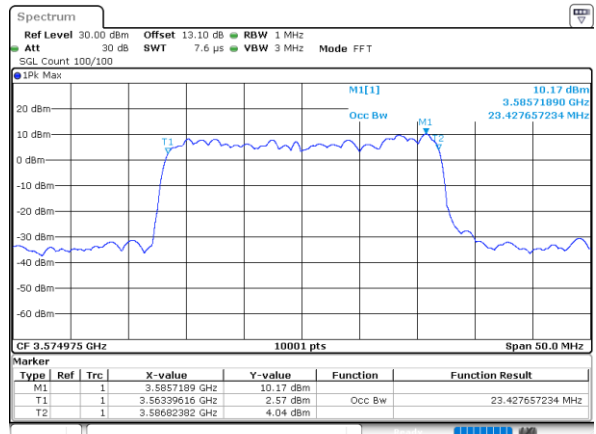

Middle Channel / 20MHz+10MHz

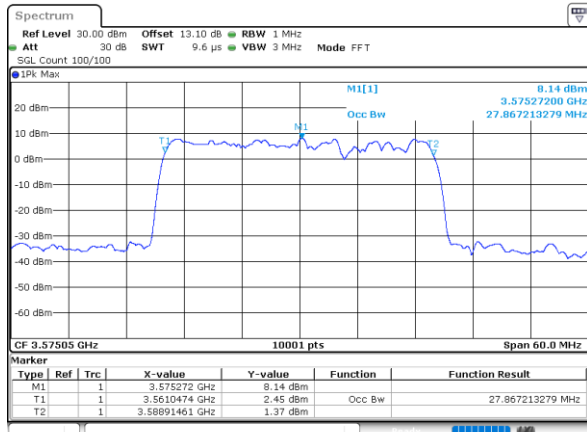

Middle Channel / 20MHz+15MHz

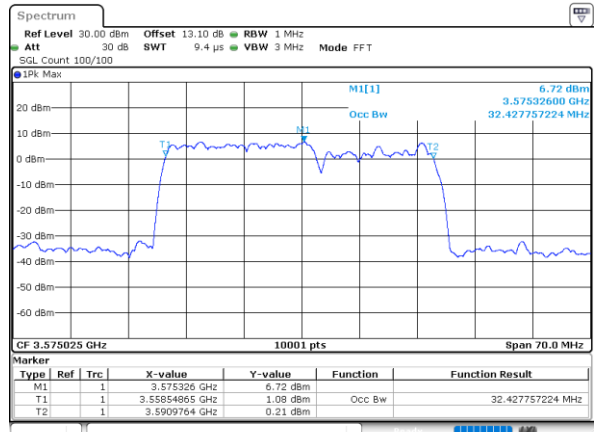




LTE Band 42C

QPSK

Middle Channel / 20MHz+20MHz

N/A

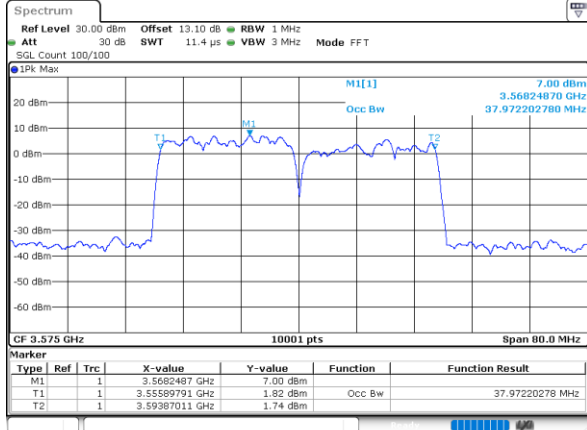


Date: 2,JUL,2025 15:33:49




LTE Band 42C

16QAM


Middle Channel / 5MHz+20MHz

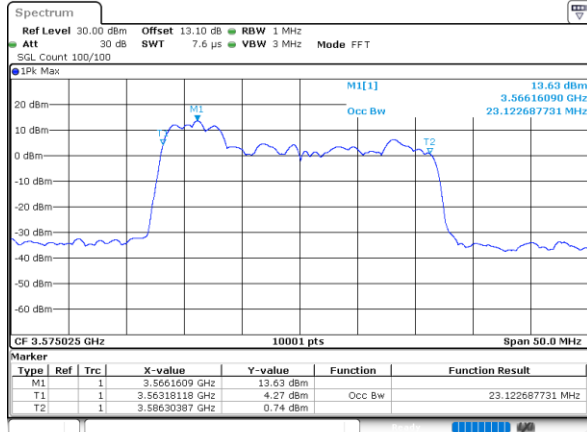


Middle Channel / 10MHz+20MHz

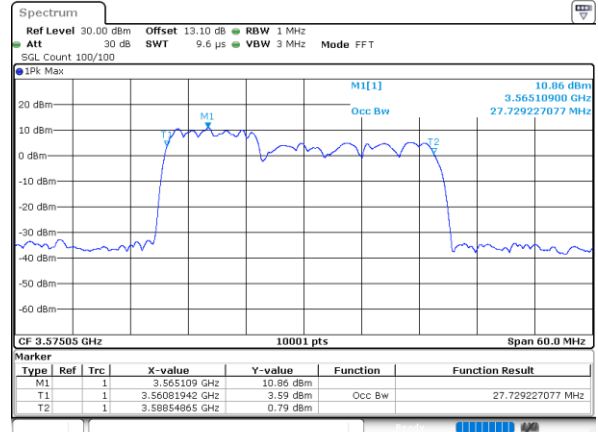


Middle Channel / 15MHz+20MHz

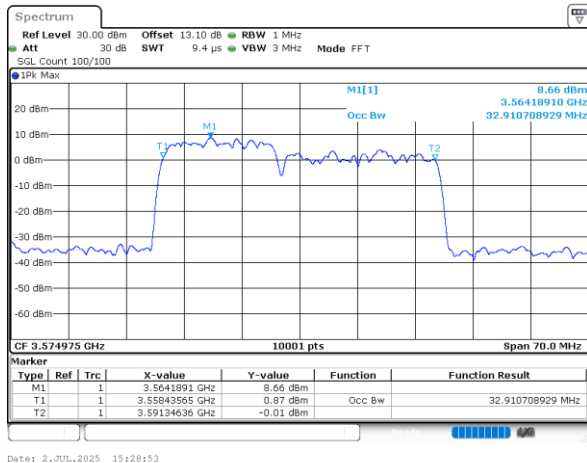


Middle Channel / 20MHz+5MHz

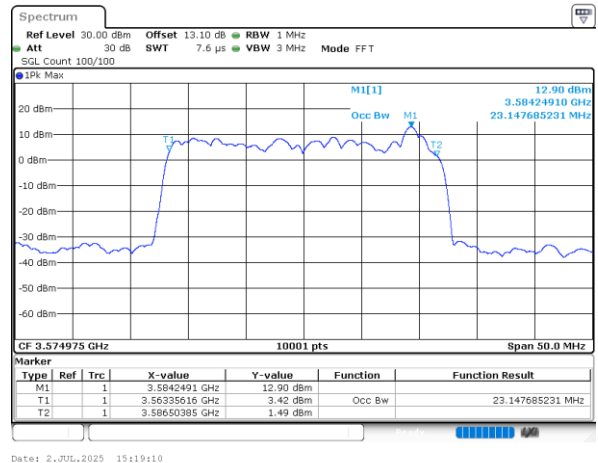

Middle Channel / 20MHz+10MHz

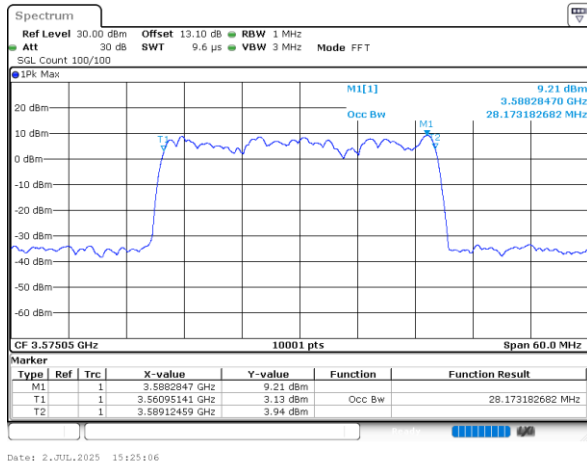

Middle Channel / 20MHz+15MHz

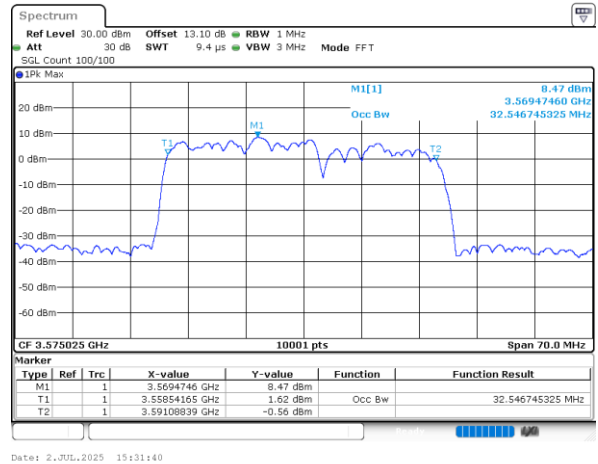




LTE Band 42C

16QAM

Middle Channel / 20MHz+20MHz

N/A

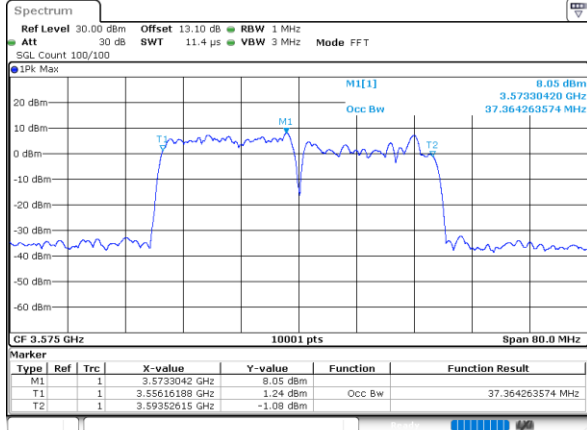


Date: 2,JUL,2025 15:34:29


LTE Band 42C

64QAM


Middle Channel / 5MHz+20MHz

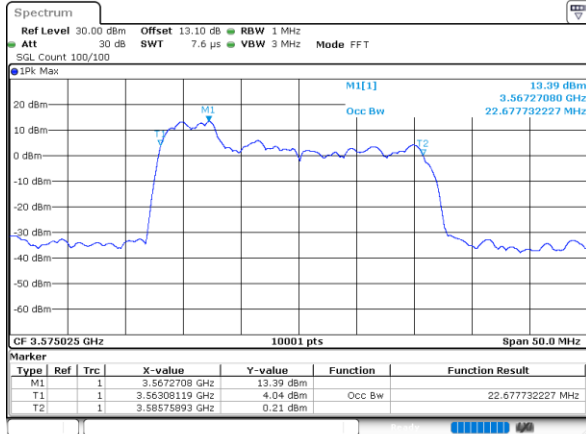


Middle Channel / 10MHz+20MHz

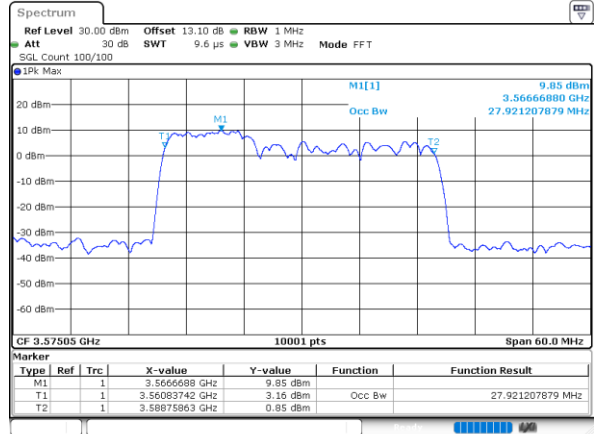


Middle Channel / 15MHz+20MHz

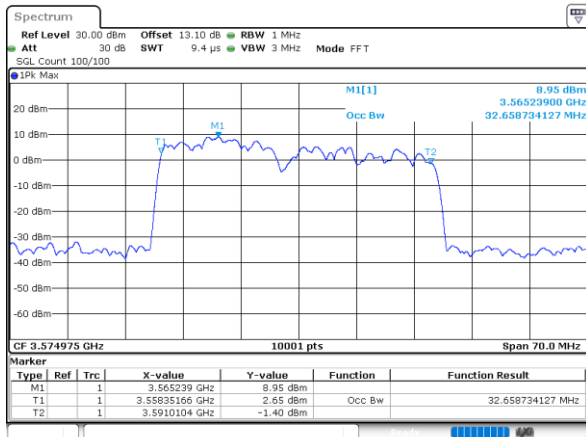


Middle Channel / 20MHz+5MHz

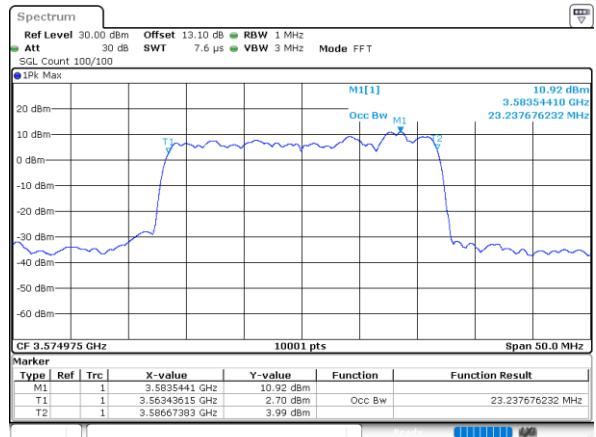

Middle Channel / 20MHz+10MHz

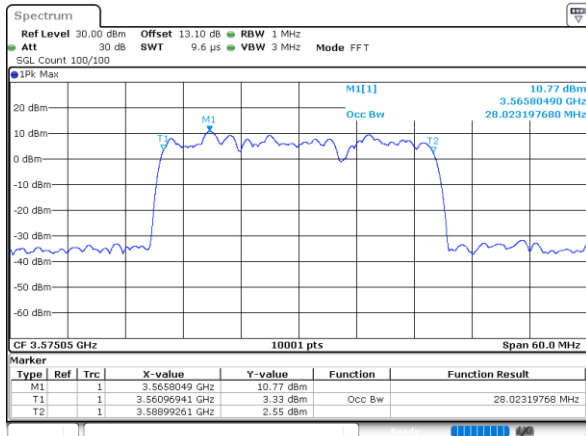

Middle Channel / 20MHz+15MHz

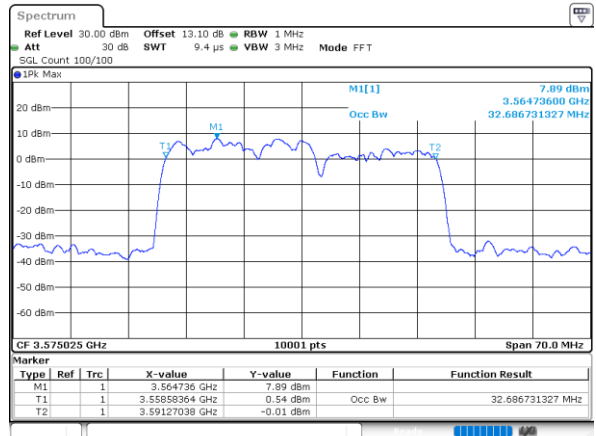




LTE Band 42C

64QAM

Middle Channel / 20MHz+20MHz

N/A

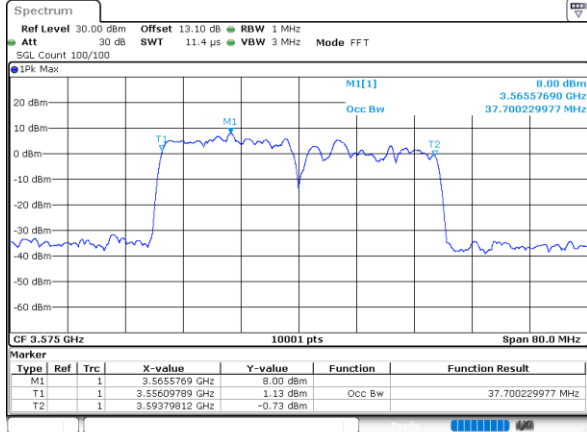


Date: 2,JUL,2025 15:35:11




LTE Band 42C

256QAM


Middle Channel / 5MHz+20MHz

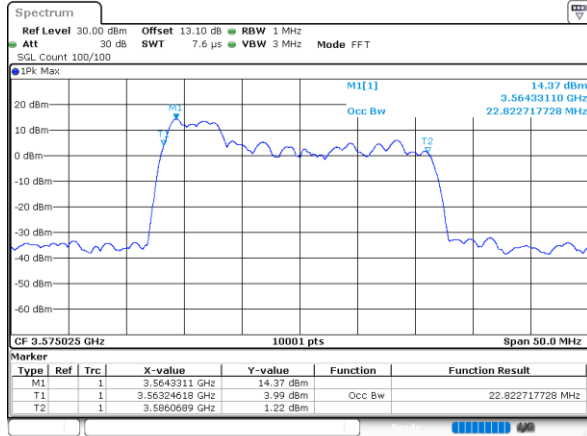


Middle Channel / 10MHz+20MHz

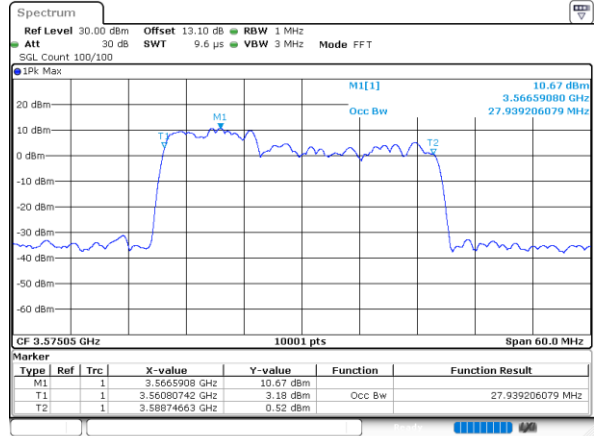


Middle Channel / 15MHz+20MHz

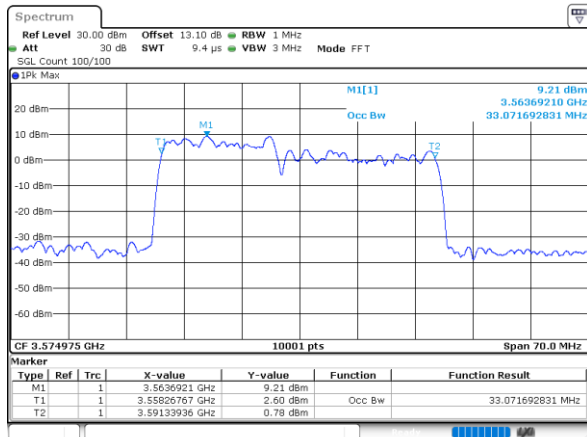


Middle Channel / 20MHz+5MHz

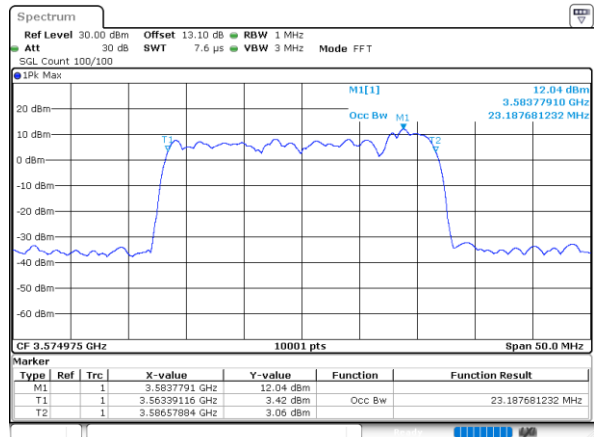

Middle Channel / 20MHz+10MHz

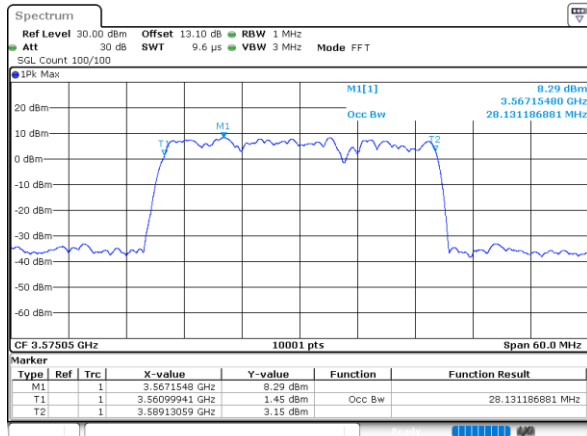

Middle Channel / 20MHz+15MHz

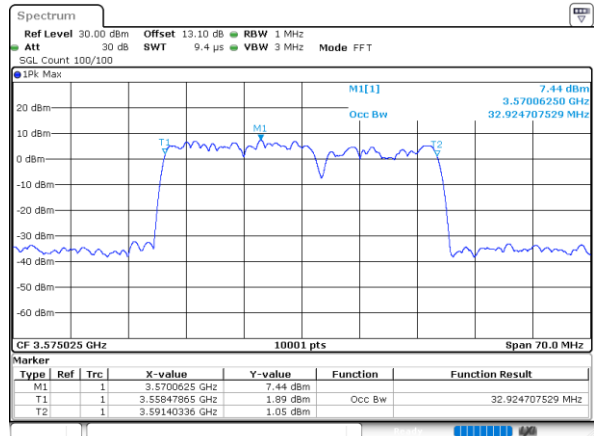




LTE Band 42C

256QAM

Middle Channel / 20MHz+20MHz

N/A

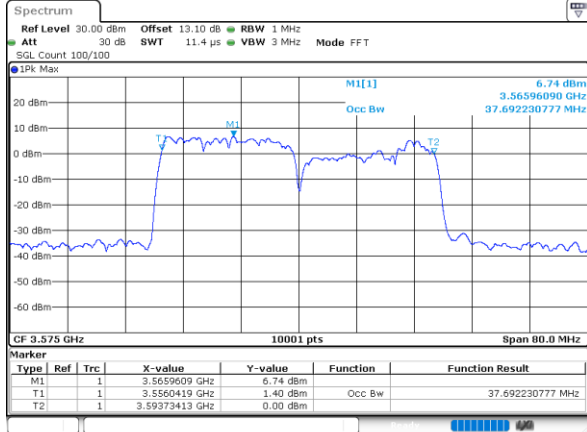

Date: 2,JUL,2025 15:35:52


**ACLR**

LTE Band 42C / 5MHz+20MHz


QPSK

Lowest Channel / 1RB0 and 1RB99

Lowest Channel / 1RB24 and 1RB0

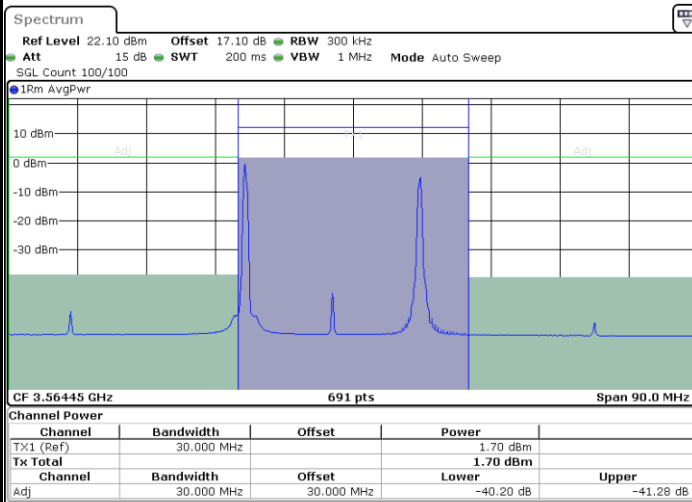


Date: 7.AUG.2025 21:32:41

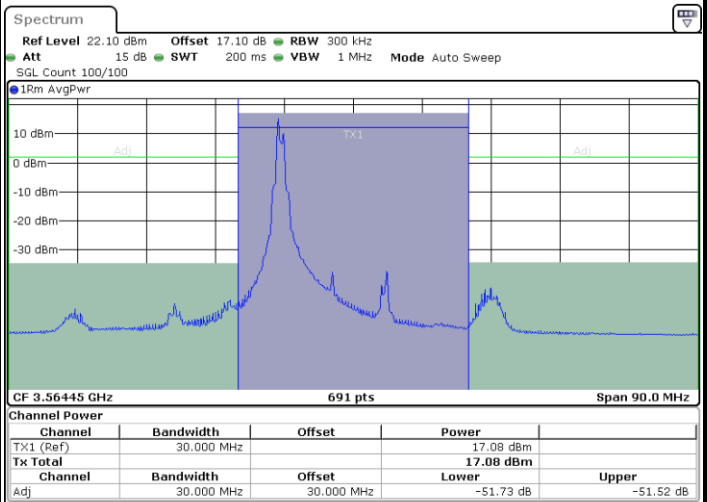

Date: 7.AUG.2025 21:38:40

Lowest Channel / FullRB

N/A

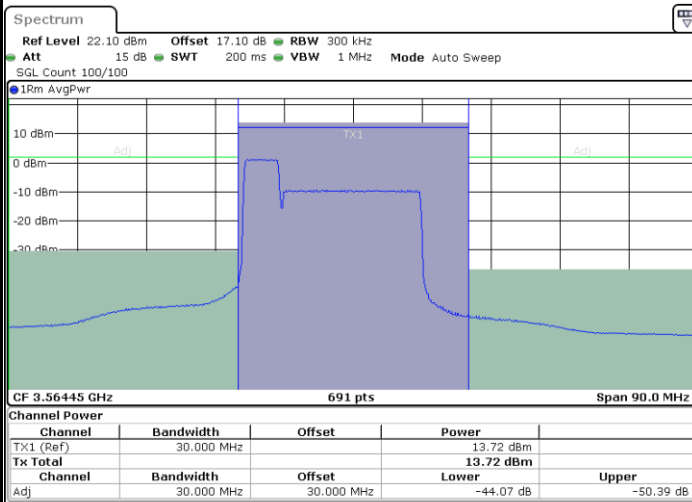

Date: 7.AUG.2025 21:29:01





LTE Band 42C / 5MHz+20MHz

QPSK


Middle Channel / 1RB0 and 1RB99

Middle Channel / 1RB24 and 1RB0

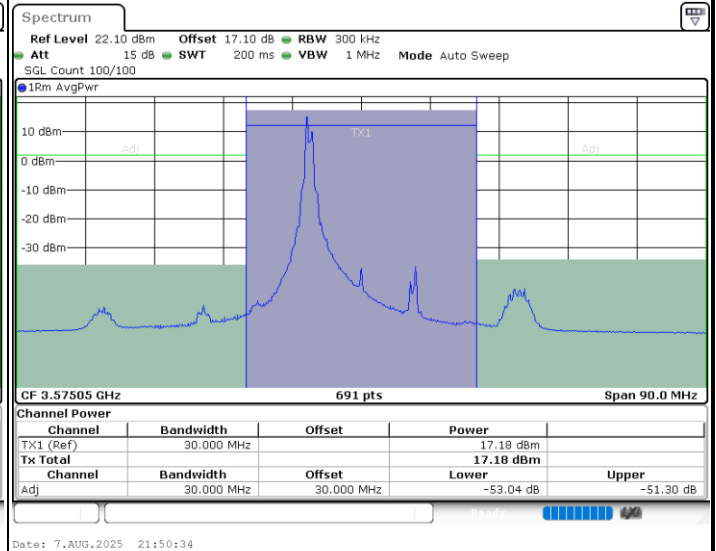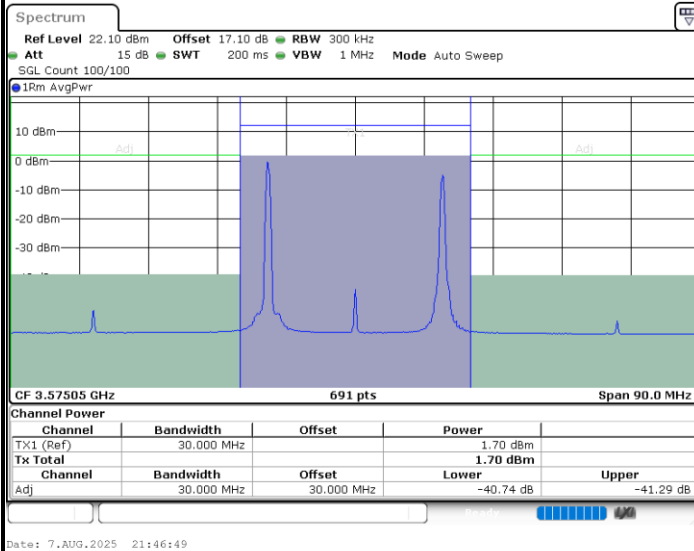

Middle Channel / FullRB

N/A

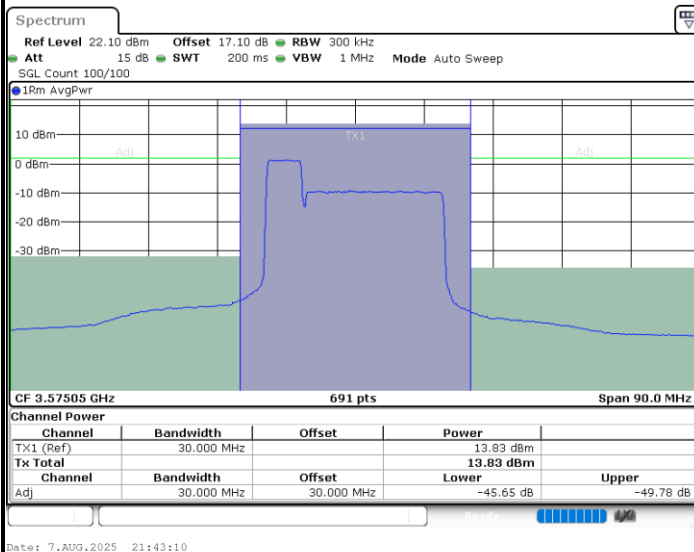




LTE Band 42C / 5MHz+20MHz


QPSK

Highest Channel / 1RB0 and 1RB99

Highest Channel / 1RB24 and 1RB0

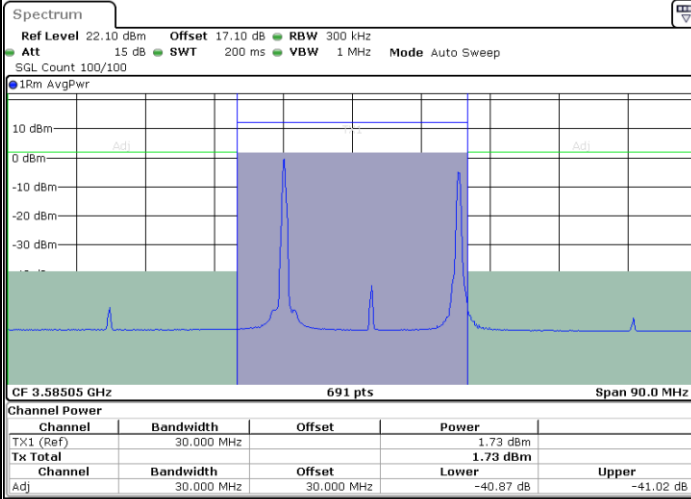


Date: 7.AUG.2025 21:59:31

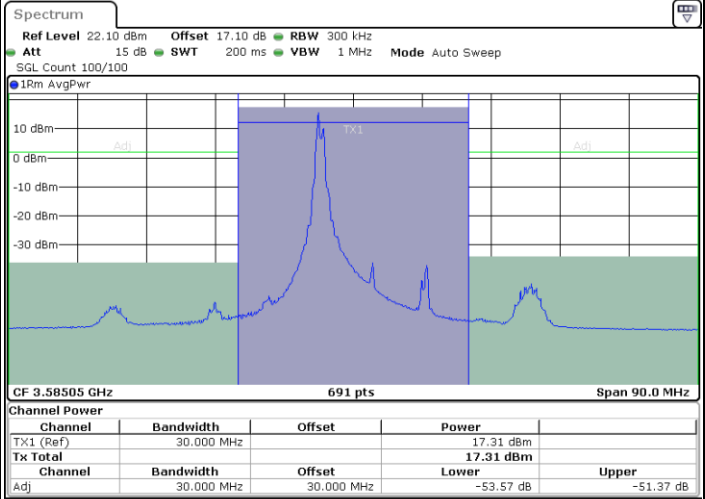

Date: 7.AUG.2025 22:03:19

Highest Channel / FullIRB

N/A

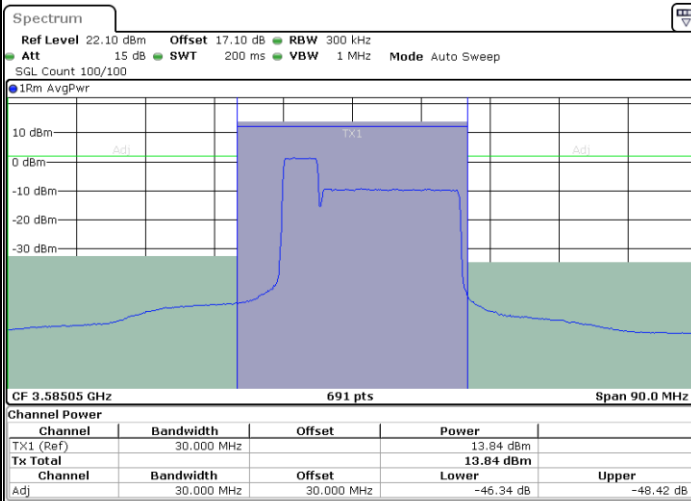

Date: 7.AUG.2025 21:55:50





LTE Band 42C / 10MHz+20MHz

QPSK


Lowest Channel / 1RB0 and 1RB99

Lowest Channel / 1RB49 and 1RB0

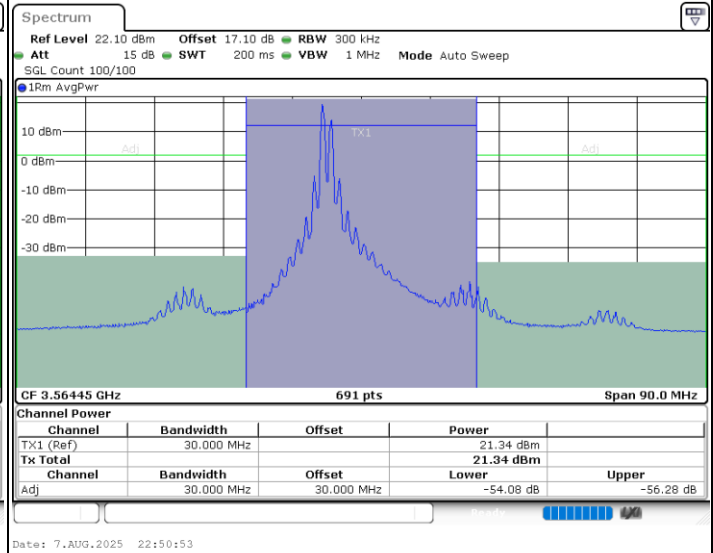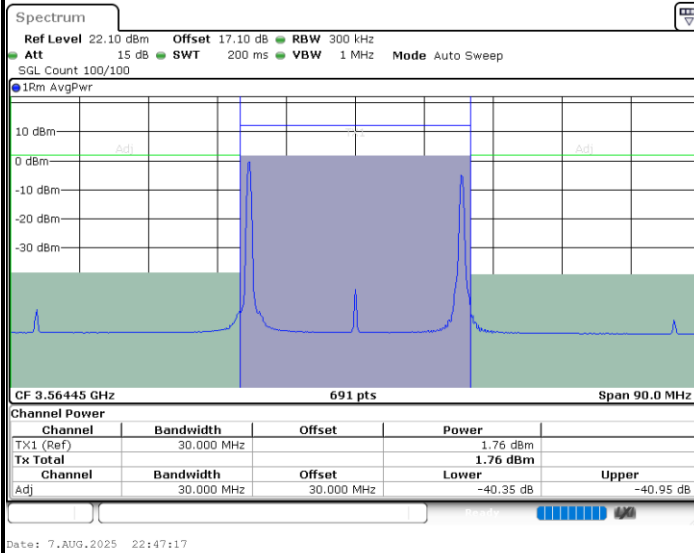

Lowest Channel / FullIRB

N/A

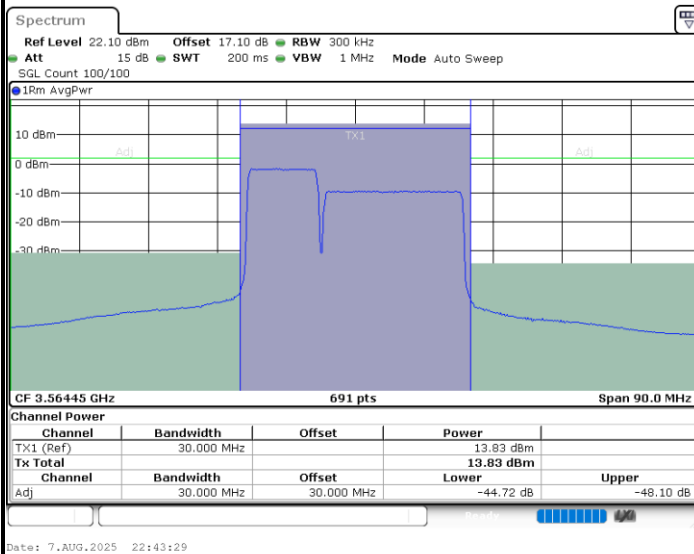





LTE Band 42C / 10MHz+20MHz

QPSK


Middle Channel / 1RB0 and 1RB99

Middle Channel / 1RB49 and 1RB0

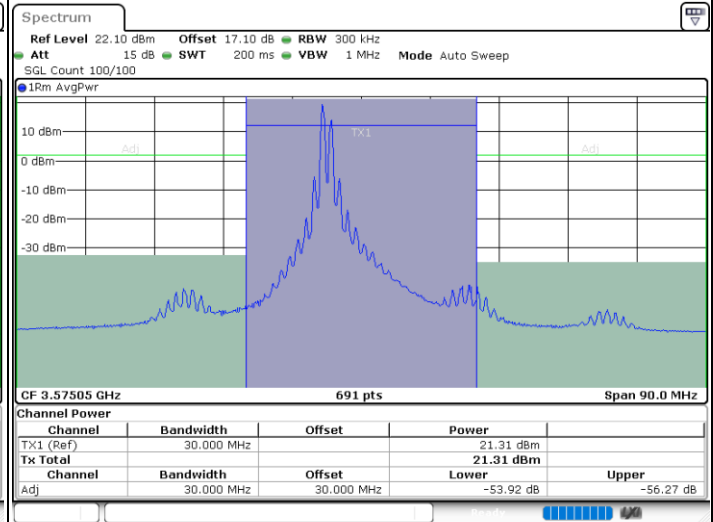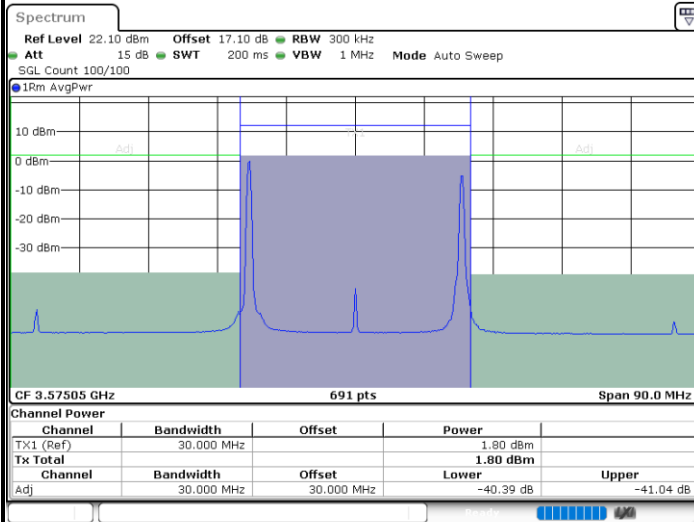

Middle Channel / FullRB

N/A

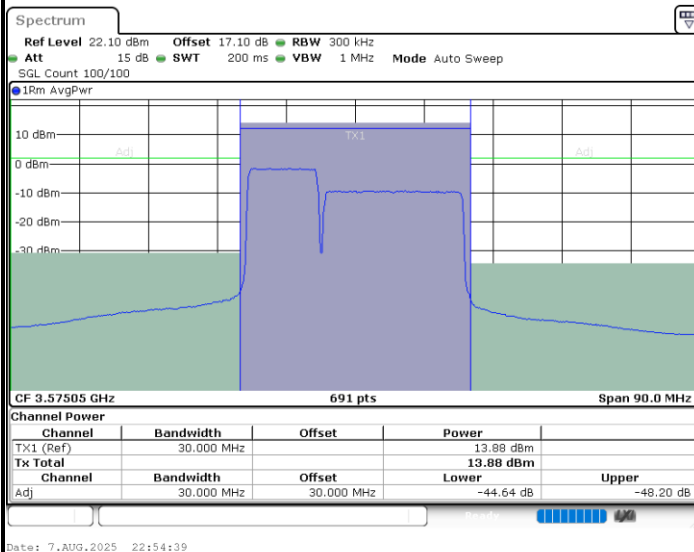




LTE Band 42C / 10MHz+20MHz


QPSK

Highest Channel / 1RB0 and 1RB99

Highest Channel / 1RB49 and 1RB0

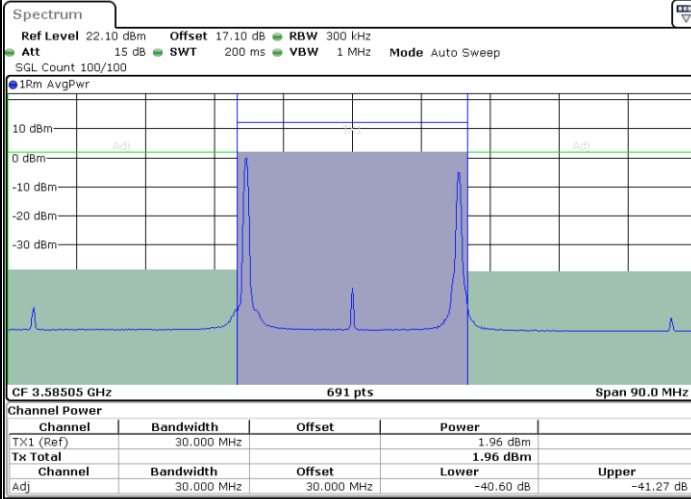


Date: 7.AUG.2025 23:09:36

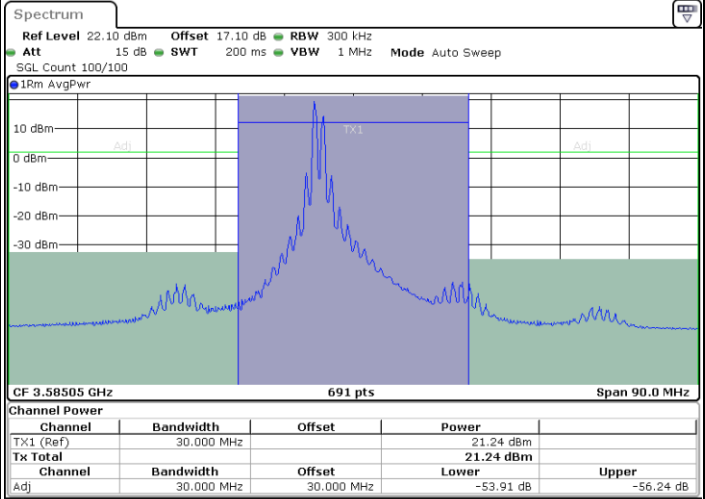

Date: 7.AUG.2025 23:13:14

Highest Channel / FullIRB

N/A

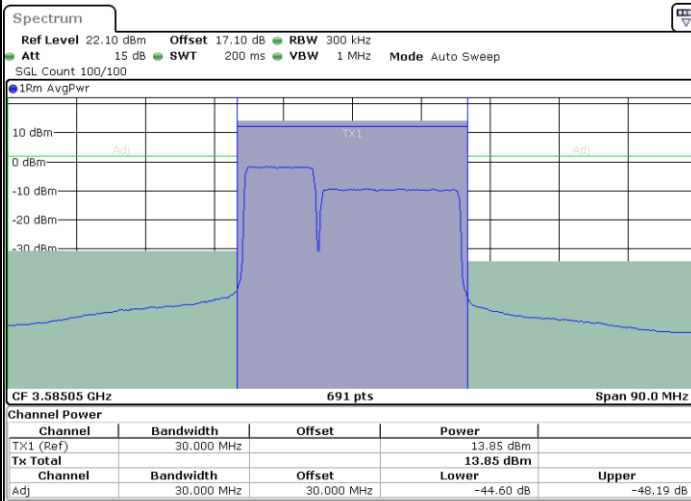

Date: 7.AUG.2025 23:05:55





LTE Band 42C / 15MHz+20MHz

QPSK


Lowest Channel / 1RB0 and 1RB99

Lowest Channel / 1RB74 and 1RB0

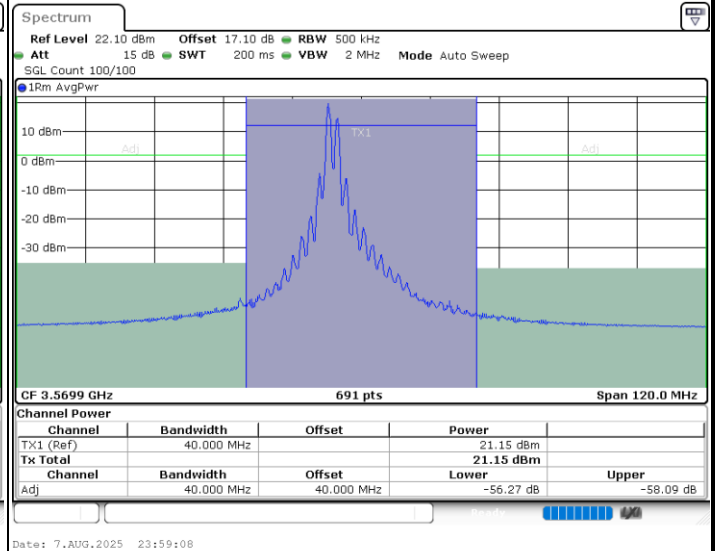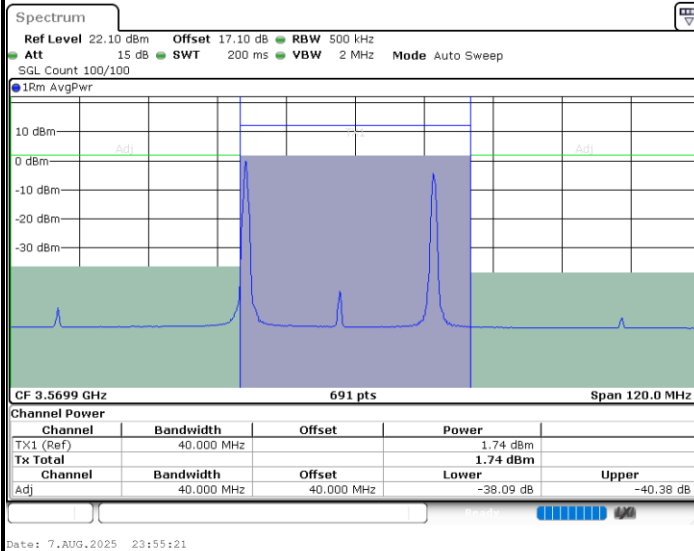

Lowest Channel / FullIRB

N/A

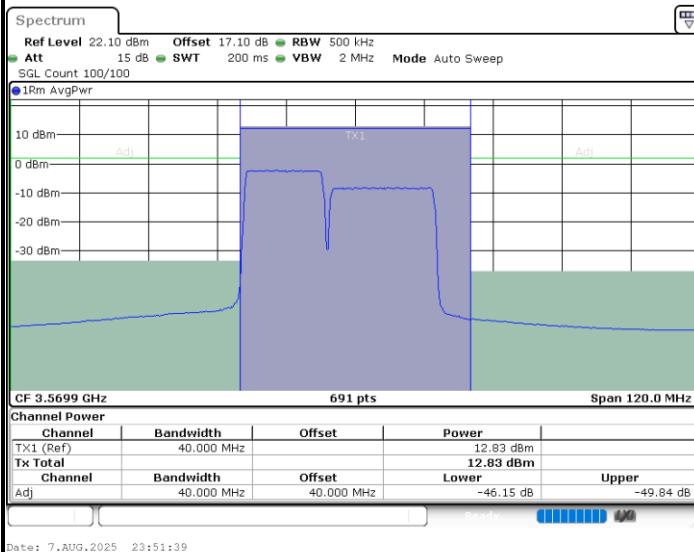





LTE Band 42C / 15MHz+20MHz

QPSK


Middle Channel / 1RB0 and 1RB99

Middle Channel / 1RB74 and 1RB0

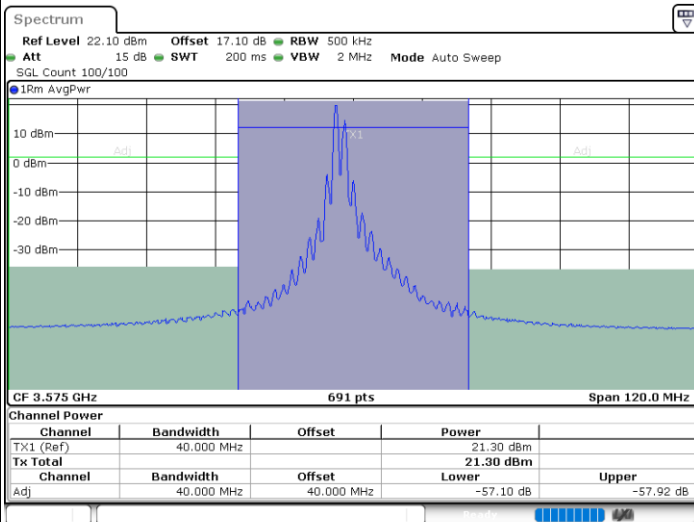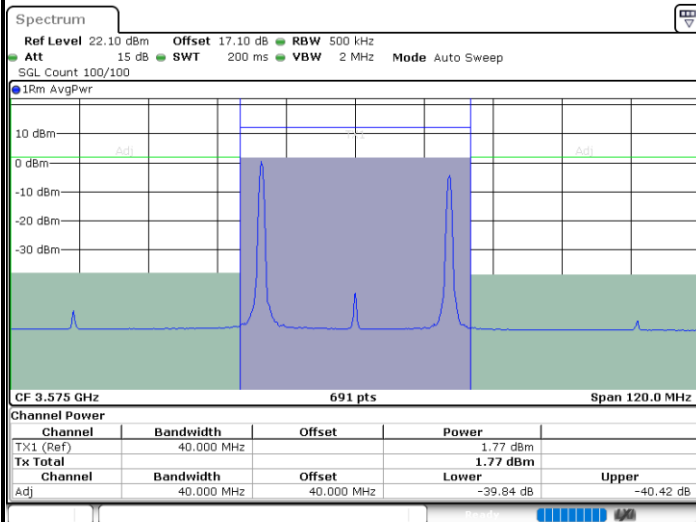

Middle Channel / FullRB

N/A

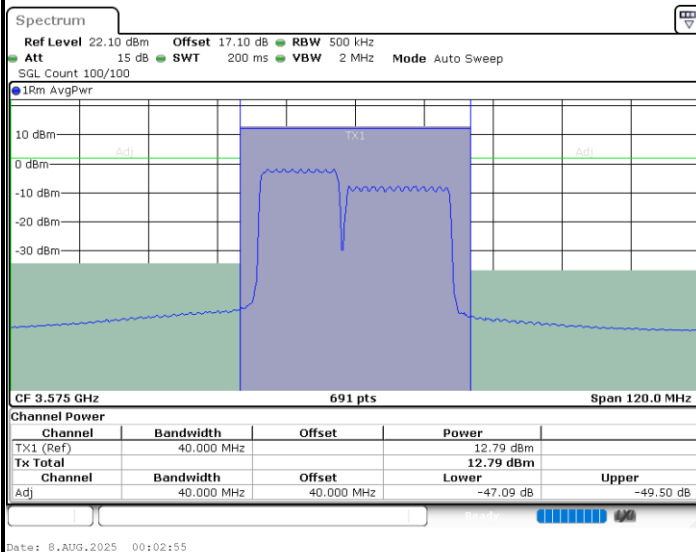





LTE Band 42C / 15MHz+20MHz

QPSK


Highest Channel / 1RB0 and 1RB99

Highest Channel / 1RB74 and 1RB0

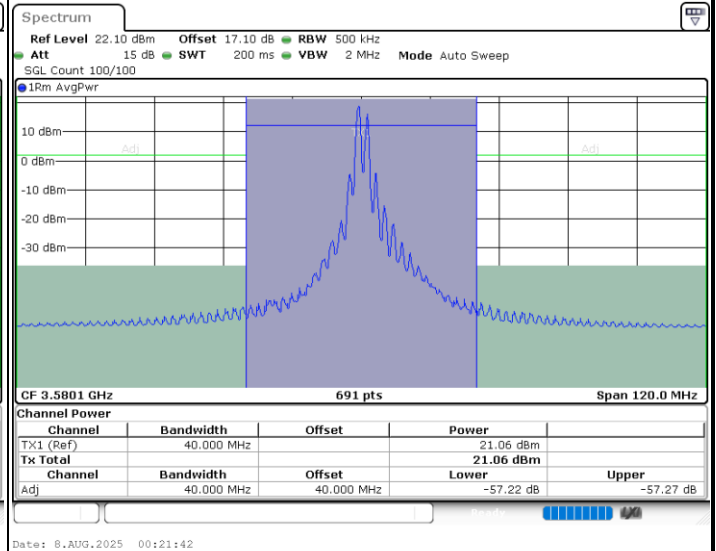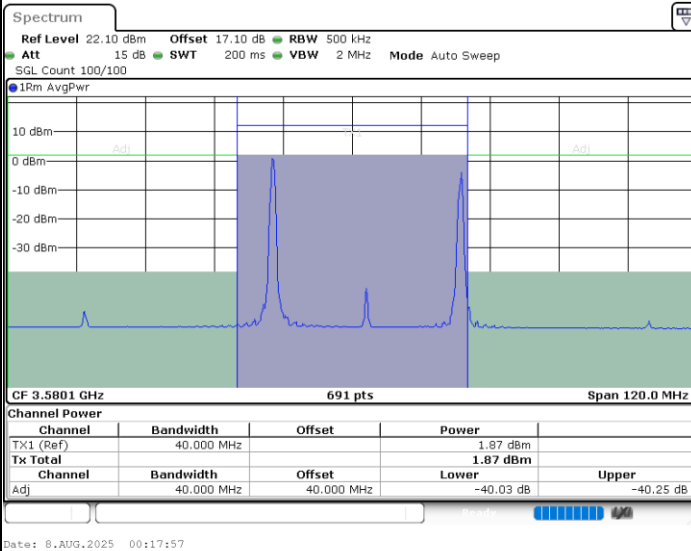

Highest Channel / FullIRB

N/A

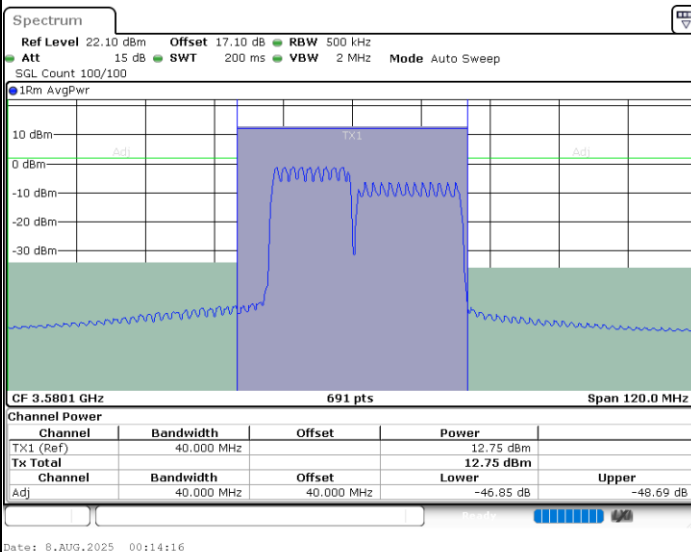





LTE Band 42C / 20MHz+5MHz

QPSK


Lowest Channel / 1RB0 and 1RB24

Lowest Channel / 1RB99 and 1RB0

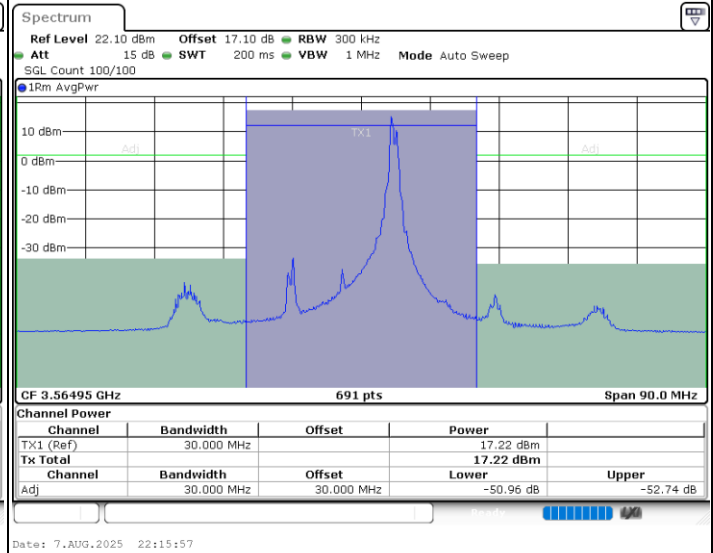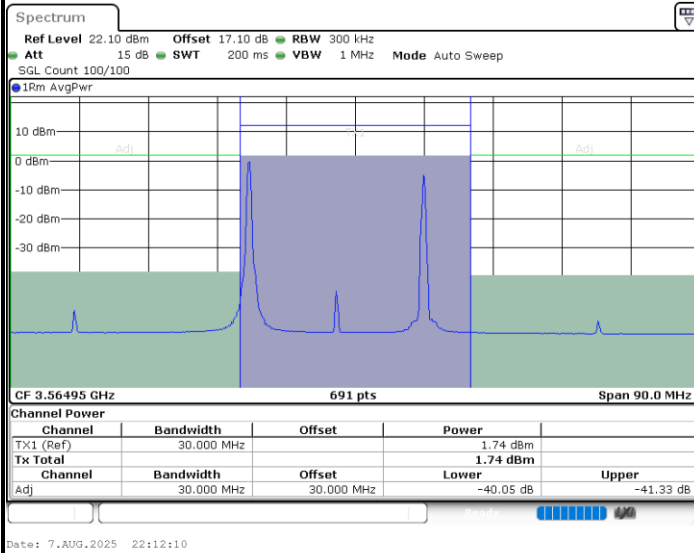

Lowest Channel / FullIRB

N/A

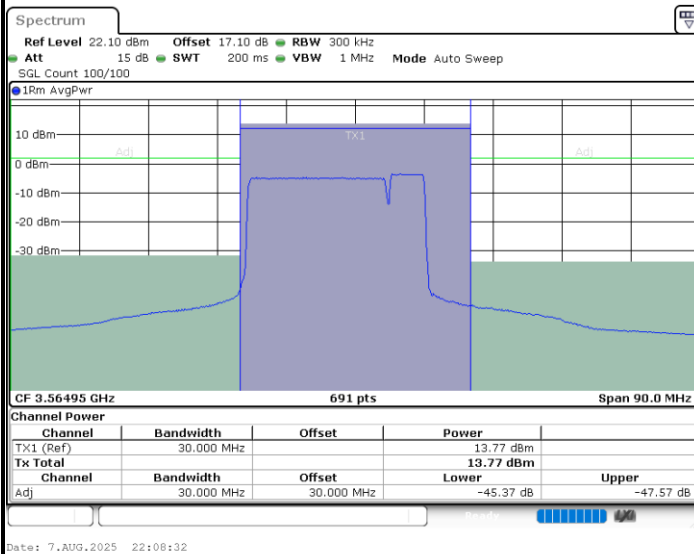





LTE Band 42C / 20MHz+5MHz

QPSK


Middle Channel / 1RB0 and 1RB24

Middle Channel / 1RB99 and 1RB0

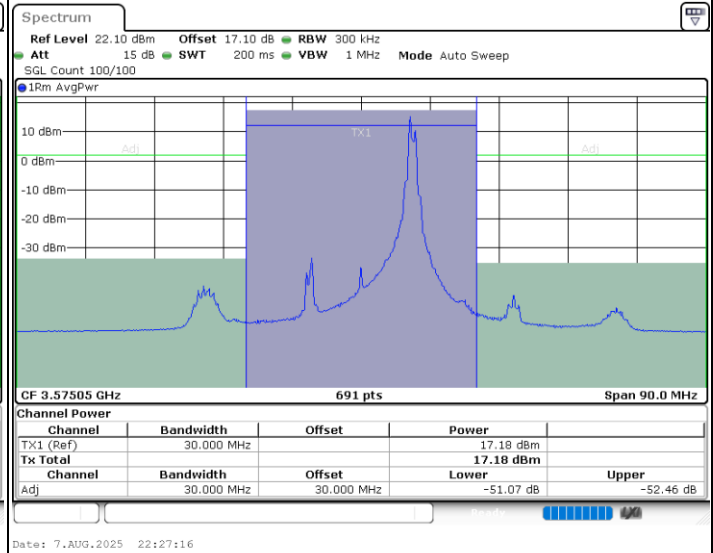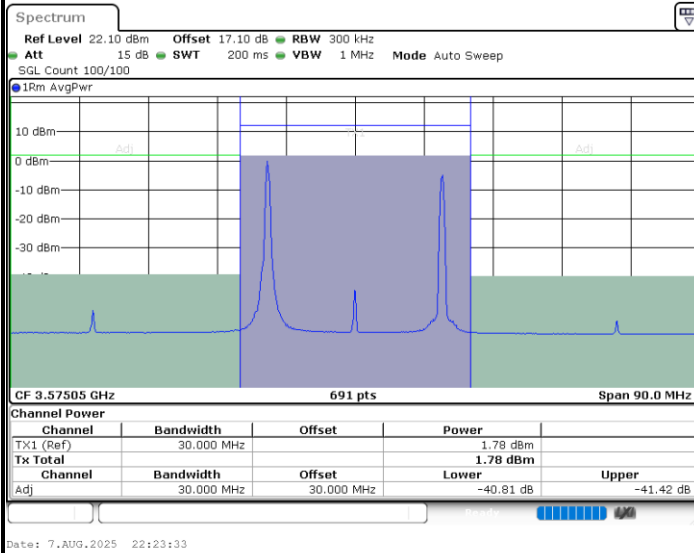

Middle Channel / FullRB

N/A

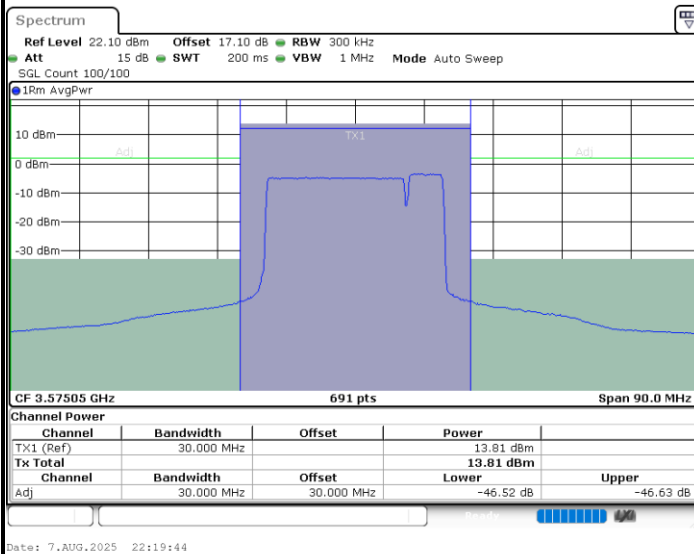




LTE Band 42C / 20MHz+5MHz


QPSK

Highest Channel / 1RB0 and 1RB24

Highest Channel / 1RB99 and 1RB0

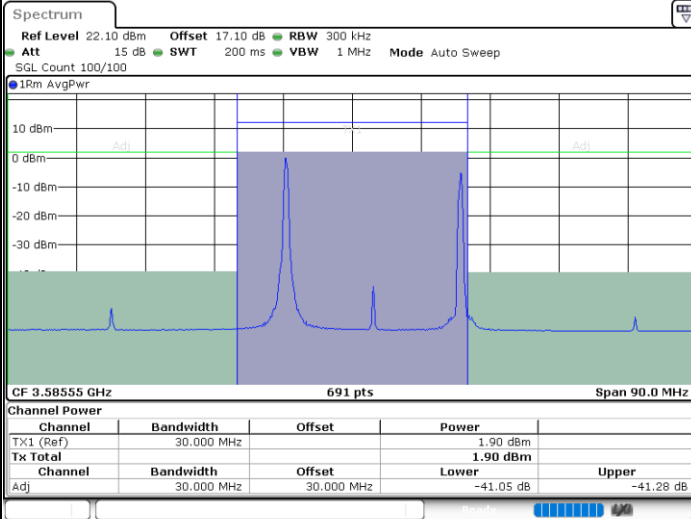


Date: 7.AUG.2025 22:34:55

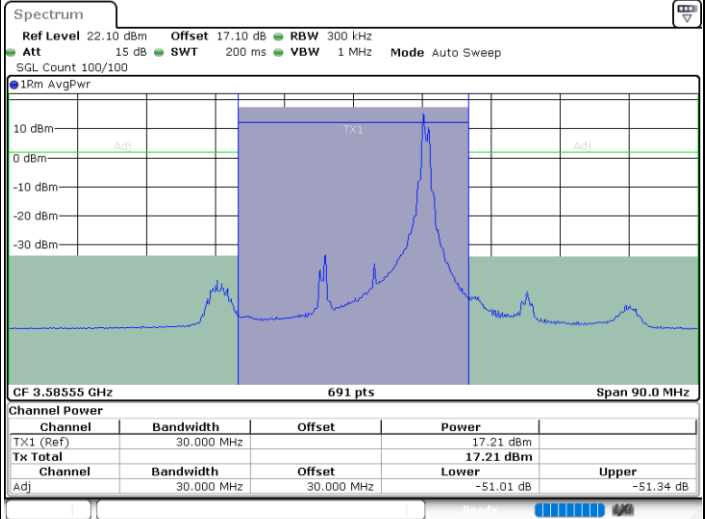

Date: 7.AUG.2025 22:38:45

Highest Channel / FullIRB

N/A

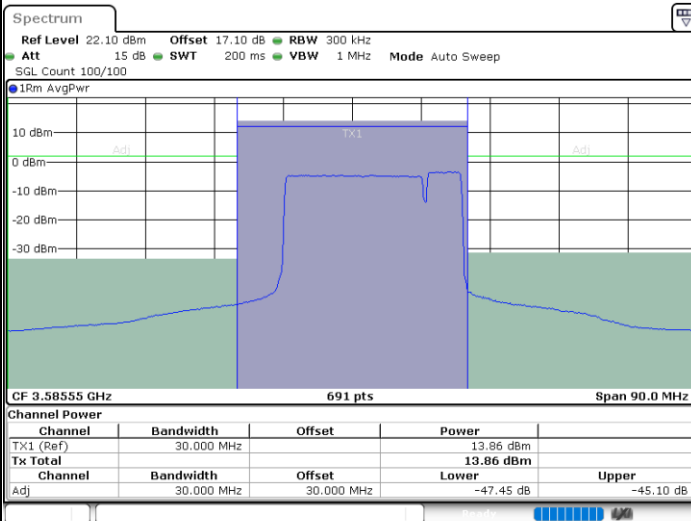

Date: 7.AUG.2025 22:31:03





LTE Band 42C / 20MHz+10MHz

QPSK


Lowest Channel / 1RB0 and 1RB49

Lowest Channel / 1RB99 and 1RB0

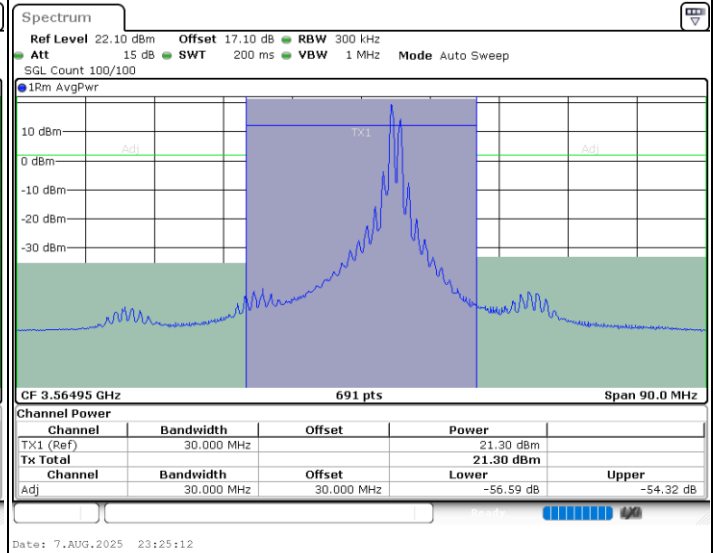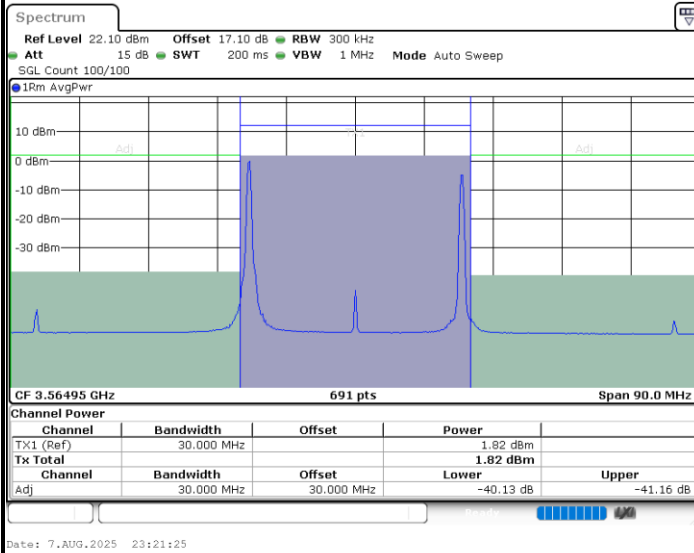

Lowest Channel / FullIRB

N/A

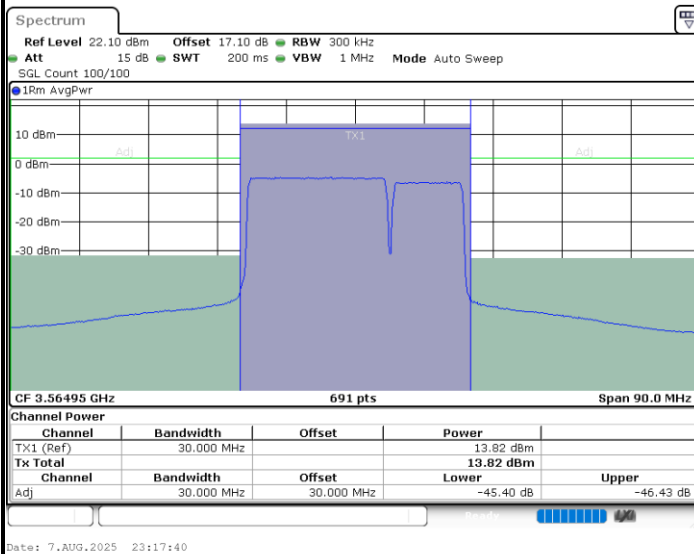





LTE Band 42C / 20MHz+10MHz

QPSK


Middle Channel / 1RB0 and 1RB49

Middle Channel / 1RB99 and 1RB0

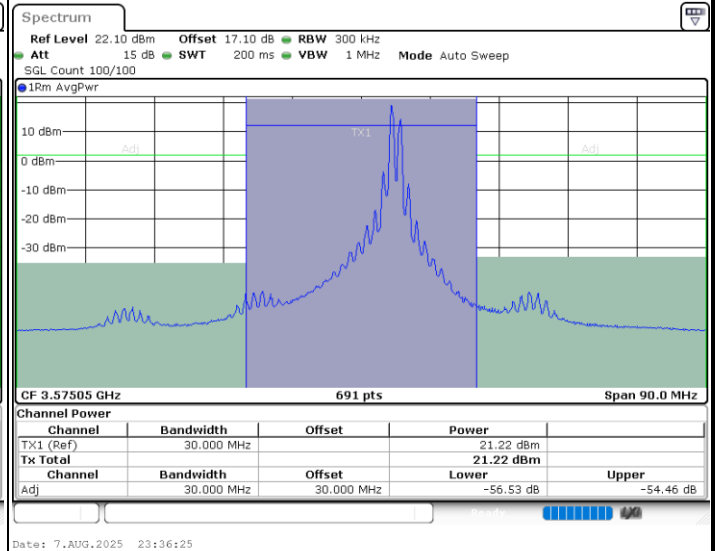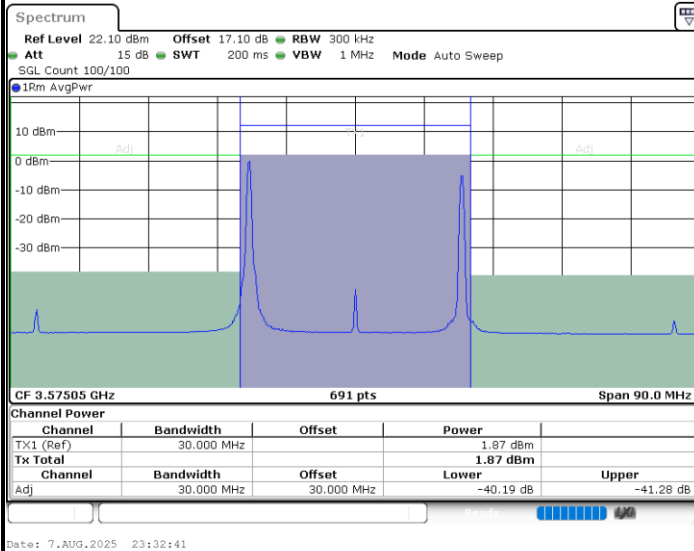

Middle Channel / FullRB

N/A

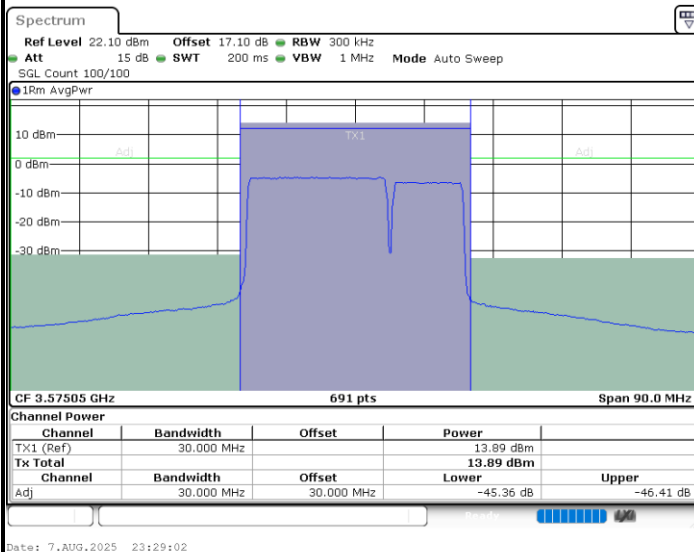





LTE Band 42C / 20MHz+10MHz

QPSK


Highest Channel / 1RB0 and 1RB49

Highest Channel / 1RB99 and 1RB0

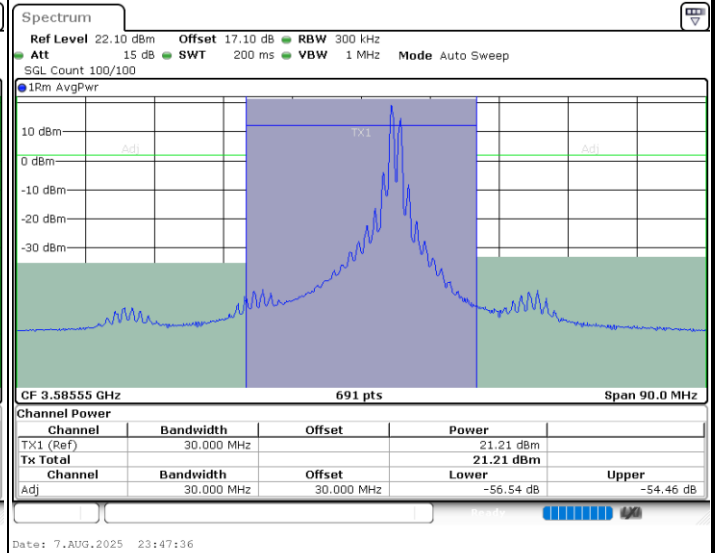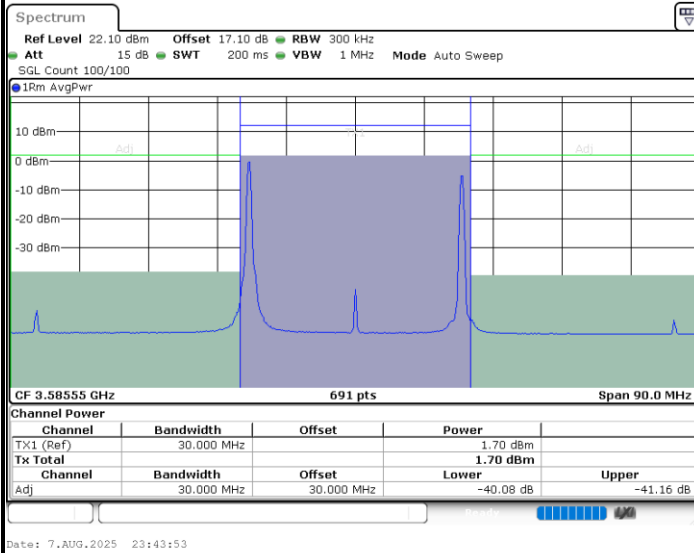

Highest Channel / FullIRB

N/A

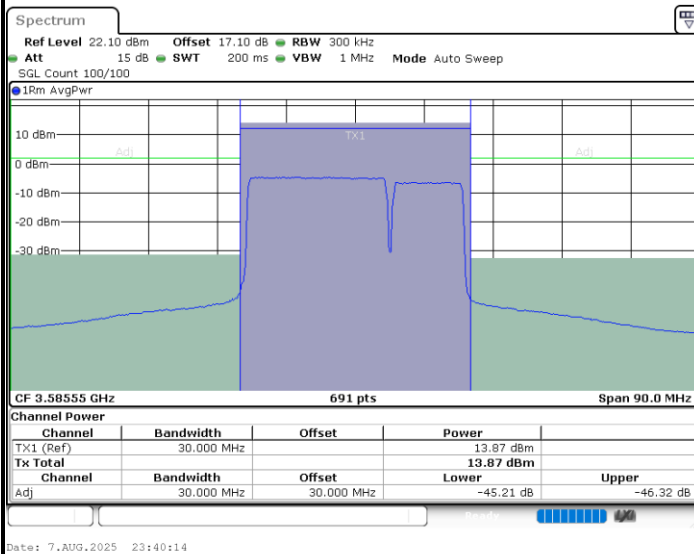





LTE Band 42C / 20MHz+15MHz

QPSK


Lowest Channel / 1RB0 and 1RB74

Lowest Channel / 1RB99 and 1RB0

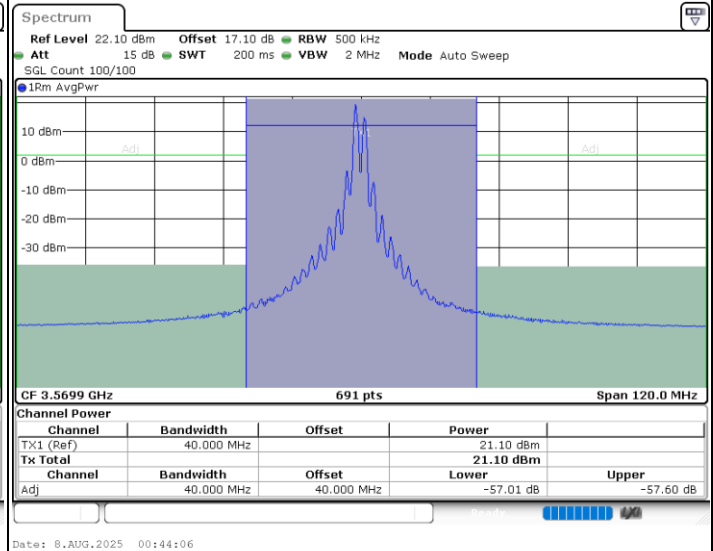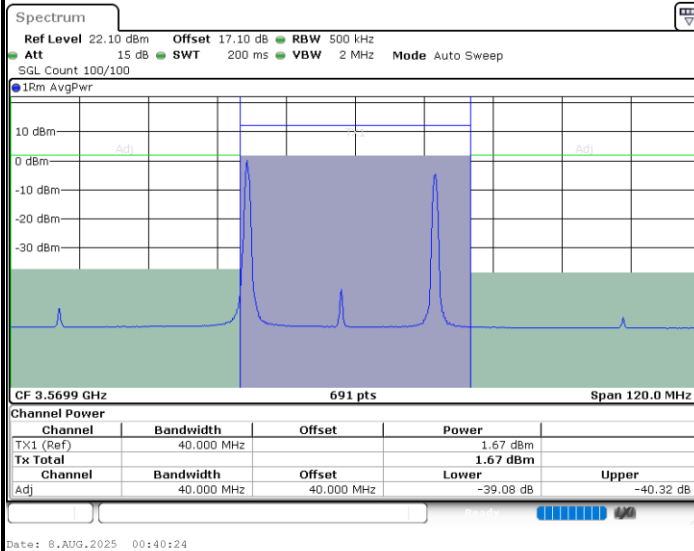

Lowest Channel / FullIRB

N/A

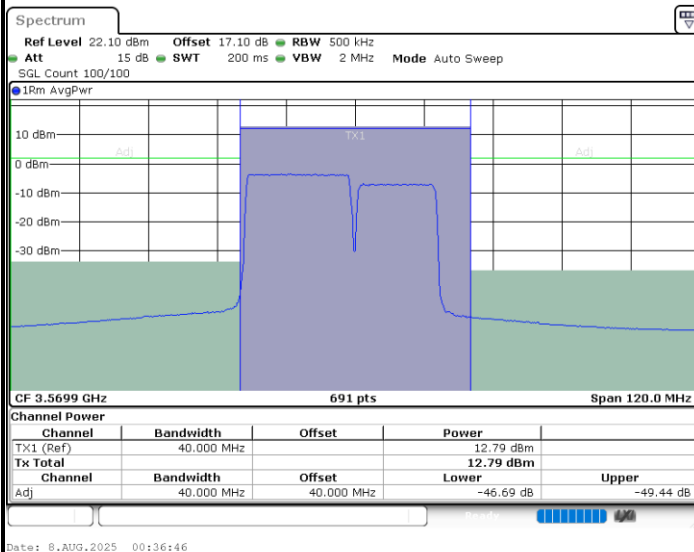





LTE Band 42C / 20MHz+15MHz

QPSK

Middle Channel / 1RB0 and 1RB74

Middle Channel / 1RB99 and 1RB0

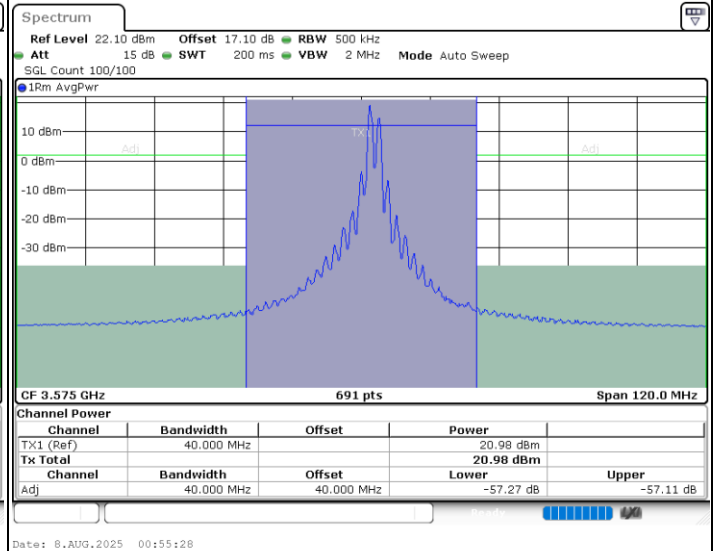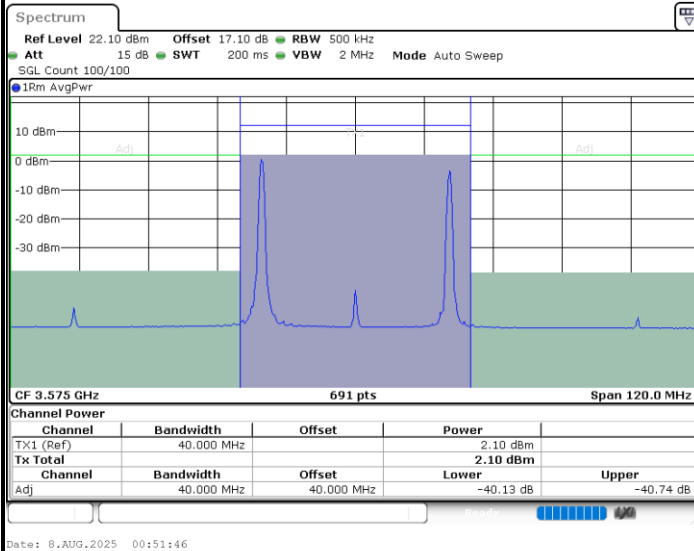

Middle Channel / FullRB

N/A

