

APPENDIX B – TEST DATA OF RADIATED EMISSION

Radiated Emission Band Edge

The measurement results are obtained as described below:

Measure Level = Reading Level + cable loss + antenna factor

Sample calculation: (88.68 dBuV/m) = (41.78 dBμV) + (12.4 dB) + (34.5 dB), the corresponding frequency is 5180MHz.

The measurement results contain the correction factor of the duty cycle.

Carrier frequency (MHz): 5180 MHz

Channel No.:36

Test Mode: 802.11a(Chain1)

Polarity: Vertical

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5180	93.30	45.50	N/A	N/A	12.40	35.40
2	5150	49.84	2.04	-18.36	68.20	12.40	35.40

Carrier frequency (MHz): 5180

Channel No.:36

Test Mode: 802.11a(Chain1)

Polarity: Horizontal

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5180	91.12	43.32	N/A	N/A	12.40	35.40
2	5150	49.50	1.70	-18.70	68.20	12.40	35.40

Carrier frequency (MHz): 5180 MHz

Channel No.: 36

Test Mode: 802.11a(Chain1)

Polarity: Vertical

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5180	88.84	41.04	N/A	N/A	12.40	35.40
2	5150	40.29	-7.51	-13.71	54.00	12.40	35.40

Carrier frequency (MHz): 5180 MHz

Channel No.: 36

Test Mode: 802.11a(Chain1)

Polarity: Horizontal

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5180	85.98	38.18	N/A	N/A	12.40	35.40
2	5150	39.44	-8.36	-14.56	54.00	12.40	35.40

Carrier frequency (MHz): 5320 MHz

Channel No.:64

Test Mode: 802.11a(Chain1)

Polarity: Vertical

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5320	95.78	47.78	N/A	N/A	12.60	35.40
2	5340	50.50	2.50	-17.70	68.20	12.60	35.40

Carrier frequency (MHz): 5320 MHz

Channel No.:64

Test Mode: 802.11a(Chain1)

Polarity: Horizontal

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5320	92.40	44.40	N/A	N/A	12.60	35.40
2	5340	49.80	1.80	-18.40	68.20	12.60	35.40

Carrier frequency (MHz): 5320 MHz

Channel No.:64

Test Mode: 802.11a(Chain1)

Polarity: Vertical

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5320	90.34	42.34	N/A	N/A	12.60	35.40
2	5340	40.82	-7.18	-13.18	54.00	12.60	35.40

Carrier frequency (MHz): 5320 MHz

Channel No.:64

Test Mode: 802.11a(Chain1)

Polarity: Horizontal

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5320	86.31	38.31	N/A	N/A	12.60	35.40
2	5340	39.57	-8.43	-14.43	54.00	12.60	35.40

Carrier frequency (MHz): 5180 MHz

Channel No.:36

Test Mode: 802.11n (HT20 MIMO)

Polarity: Vertical

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5180	94.70	46.90	N/A	N/A	12.40	35.40
2	5150	49.90	2.10	-18.30	68.20	12.40	35.40

Carrier frequency (MHz): 5180

Channel No.:36

Test Mode: 802.11n (HT20 MIMO)

Polarity: Horizontal

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5180	92.00	44.20	N/A	N/A	12.40	35.40
2	5150	49.43	1.63	-18.77	68.20	12.40	35.40

Carrier frequency (MHz): 5180 MHz

Channel No.: 36

Test Mode: 802.11n (HT20 MIMO)

Polarity: Vertical

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5180	90.20	42.40	N/A	N/A	12.40	35.40
2	5150	39.94	-7.86	-14.06	54.00	12.40	35.40

Carrier frequency (MHz): 5180 MHz

Channel No.: 36

Test Mode: 802.11n (HT20 MIMO)

Polarity: Horizontal

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5180	85.67	37.87	N/A	N/A	12.40	35.40
2	5150	38.25	-9.55	-15.75	54.00	12.40	35.40

Carrier frequency (MHz): 5320 MHz

Channel No.:64

Test Mode: 802.11n (HT20 MIMO)

Polarity: Vertical

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5320	95.39	47.39	N/A	N/A	12.60	35.40
2	5340	51.77	3.77	-16.43	68.20	12.60	35.40

Carrier frequency (MHz): 5320 MHz

Channel No.:64

Test Mode: 802.11n (HT20 MIMO)

Polarity: Horizontal

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5320	91.55	43.55	N/A	N/A	12.60	35.40
2	5340	51.63	3.63	-16.57	68.20	12.60	35.40

Carrier frequency (MHz): 5320 MHz

Channel No.:64

Test Mode: 802.11n (HT20 MIMO)

Polarity: Vertical

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5320	90.16	42.16	N/A	N/A	12.60	35.40
2	5340	41.82	-6.18	-12.18	54.00	12.60	35.40

Carrier frequency (MHz): 5320 MHz

Channel No.:64

Test Mode: 802.11n (HT20 MIMO)

Polarity: Horizontal

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5320	85.26	37.26	N/A	N/A	12.60	35.40
2	5340	40.64	-7.36	-13.36	54.00	12.60	35.40

Carrier frequency (MHz): 5180 MHz

Channel No.:36

Test Mode: 802.11ac (VHT20 MIMO)

Polarity: Vertical

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5180	94.39	46.59	N/A	N/A	12.40	35.40
2	5150	49.51	1.71	-18.69	68.20	12.40	35.40

Carrier frequency (MHz): 5180

Channel No.:36

Test Mode: 802.11ac (VHT20 MIMO)

Polarity: Horizontal

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5180	91.03	43.23	N/A	N/A	12.40	35.40
2	5150	48.50	0.70	-19.70	68.20	12.40	35.40

Carrier frequency (MHz): 5180 MHz

Channel No.: 36

Test Mode: 802.11ac (VHT20 MIMO)

Polarity: Vertical

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5180	91.14	43.34	N/A	N/A	12.40	35.40
2	5150	40.34	-7.46	-13.66	54.00	12.40	35.40

Carrier frequency (MHz): 5180 MHz
Channel No.: 36
Test Mode: 802.11ac (VHT20 MIMO)
Polarity: Horizontal
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5180	88.52	40.72	N/A	N/A	12.40	35.40
2	5150	39.48	-8.32	-14.52	54.00	12.40	35.40

Carrier frequency (MHz): 5320 MHz
Channel No.:64
Test Mode: 802.11ac (VHT20 MIMO)
Polarity: Vertical
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5320	95.07	47.07	N/A	N/A	12.60	35.40
2	5340	51.41	3.41	-16.79	68.20	12.60	35.40

Carrier frequency (MHz): 5320 MHz
Channel No.:64
Test Mode: 802.11ac (VHT20 MIMO)
Polarity: Horizontal
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5320	91.42	43.42	N/A	N/A	12.60	35.40
2	5340	49.78	1.78	-18.42	68.20	12.60	35.40

Carrier frequency (MHz): 5320 MHz
Channel No.:64
Test Mode: 802.11ac (VHT20 MIMO)
Polarity: Vertical
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5320	90.95	42.95	N/A	N/A	12.60	35.40
2	5340	41.63	-6.37	-12.37	54.00	12.60	35.40

Carrier frequency (MHz): 5320 MHz
Channel No.:64
Test Mode: 802.11ac (VHT20 MIMO)
Polarity: Horizontal
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5320	87.59	39.59	N/A	N/A	12.60	35.40
2	5340	41.01	-6.99	-12.99	54.00	12.60	35.40

Carrier frequency (MHz): 5190 MHz
Channel No.:38
Test Mode: 802.11n (HT40 MIMO)
Polarity: Vertical
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5190	93.83	46.03	N/A	N/A	12.40	35.40
2	5150	49.34	1.54	-18.86	68.20	12.40	35.40

Carrier frequency (MHz): 5190 MHz
Channel No.:38
Test Mode: 802.11n (HT40 MIMO)
Polarity: Horizontal
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5190	88.97	41.17	N/A	N/A	12.40	35.40
2	5150	48.96	1.16	-19.24	68.20	12.40	35.40

Carrier frequency (MHz): 5190 MHz
Channel No.:38
Test Mode: 802.11n (HT40 MIMO)
Polarity: Vertical
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5190	90.25	42.45	N/A	N/A	12.40	35.40
2	5150	39.51	-8.29	-14.49	54.00	12.40	35.40

Carrier frequency (MHz): 5190 MHz

Channel No.:38

Test Mode: 802.11n (HT40 MIMO)

Polarity: Horizontal

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5190	86.21	38.41	N/A	N/A	12.40	35.40
2	5150	37.97	-9.83	-16.03	54.00	12.40	35.40

Carrier frequency (MHz): 5310 MHz

Channel No.:62

Test Mode: 802.11n (HT40 MIMO)

Polarity: Vertical

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5310	95.04	47.04	N/A	N/A	12.60	35.40
2	5350	51.26	3.26	-16.94	68.20	12.60	35.40

Carrier frequency (MHz): 5310 MHz

Channel No.:62

Test Mode: 802.11n (HT40 MIMO)

Polarity: Horizontal

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5310	92.80	44.80	N/A	N/A	12.60	35.40
2	5350	49.45	1.45	-18.75	68.20	12.60	35.40

Carrier frequency (MHz): 5310 MHz

Channel No.:62

Test Mode: 802.11n (HT40 MIMO)

Polarity: Vertical

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5310	90.66	42.66	N/A	N/A	12.60	35.40
2	5350	40.87	-7.13	-13.13	54.00	12.60	35.40

Carrier frequency (MHz): 5310 MHz

Channel No.:62

Test Mode: 802.11n (HT40 MIMO)

Polarity: Horizontal

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5310	88.21	40.21	N/A	N/A	12.60	35.40
2	5350	40.30	-7.70	-13.70	54.00	12.60	35.40

Carrier frequency (MHz): 5190 MHz

Channel No.:38

Test Mode: 802.11ac (VHT40 MIMO)

Polarity: Vertical

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5190	94.18	46.38	N/A	N/A	12.40	35.40
2	5150	49.29	1.49	-18.91	68.20	12.40	35.40

Carrier frequency (MHz): 5190 MHz

Channel No.:38

Test Mode: 802.11ac (VHT40 MIMO)

Polarity: Horizontal

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5190	91.54	43.74	N/A	N/A	12.40	35.40
2	5150	48.20	0.40	-20.00	68.20	12.40	35.40

Carrier frequency (MHz): 5190 MHz

Channel No.:38

Test Mode: 802.11ac (VHT40 MIMO)

Polarity: Vertical

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5190	91.46	43.66	N/A	N/A	12.40	35.40
2	5150	39.05	-8.75	-14.95	54.00	12.40	35.40

Carrier frequency (MHz): 5190 MHz
Channel No.:38
Test Mode: 802.11ac (VHT40 MIMO)
Polarity: Horizontal
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5190	86.94	39.14	N/A	N/A	12.40	35.40
2	5150	38.21	-9.59	-15.79	54.00	12.40	35.40

Carrier frequency (MHz): 5310 MHz
Channel No.:62
Test Mode: 802.11ac (VHT40 MIMO)
Polarity: Vertical
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5310	94.60	46.60	N/A	N/A	12.60	35.40
2	5350	50.72	2.72	-17.48	68.20	12.60	35.40

Carrier frequency (MHz): 5310 MHz
Channel No.:62
Test Mode: 802.11ac (VHT40 MIMO)
Polarity: Horizontal
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5310	89.81	41.81	N/A	N/A	12.60	35.40
2	5350	49.86	1.86	-18.34	68.20	12.60	35.40

Carrier frequency (MHz): 5310 MHz
Channel No.:62
Test Mode: 802.11ac (VHT40 MIMO)
Polarity: Vertical
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5310	90.44	42.44	N/A	N/A	12.60	35.40
2	5350	41.54	-6.46	-12.46	54.00	12.60	35.40

Carrier frequency (MHz): 5310 MHz
Channel No.:62
Test Mode: 802.11ac (VHT40 MIMO)
Polarity: Horizontal
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5310	85.93	37.93	N/A	N/A	12.60	35.40
2	5350	40.26	-7.74	-13.74	54.00	12.60	35.40

Carrier frequency (MHz): 5210 MHz
Channel No.:42
Test Mode: 802.11ac (VHT80 MIMO)
Polarity: Vertical
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5210	94.11	46.31	N/A	N/A	12.40	35.40
2	5150	49.27	1.47	-18.93	68.20	12.40	35.40

Carrier frequency (MHz): 5210 MHz
Channel No.:42
Test Mode: 802.11ac (VHT80 MIMO)
Polarity: Horizontal
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5210	90.61	42.81	N/A	N/A	12.40	35.40
2	5150	49.14	1.34	-19.06	68.20	12.40	35.40

Carrier frequency (MHz): 5210 MHz
Channel No.:42
Test Mode: 802.11ac (VHT80 MIMO)
Polarity: Vertical
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5210	89.81	42.01	N/A	N/A	12.40	35.40
2	5150	40.96	-6.84	-13.04	54.00	12.40	35.40

Carrier frequency (MHz): 5210 MHz
Channel No.:42
Test Mode: 802.11ac (VHT80 MIMO)
Polarity: Horizontal
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5210	85.19	37.39	N/A	N/A	12.40	35.40
2	5150	40.02	-7.78	-13.98	54.00	12.40	35.40

Carrier frequency (MHz): 5290 MHz
Channel No.:58
Test Mode: 802.11ac (VHT80 MIMO)
Polarity: Vertical
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5290	94.69	46.89	N/A	N/A	12.40	35.40
2	5210	50.97	3.17	-17.23	68.20	12.40	35.40

Carrier frequency (MHz): 5290 MHz
Channel No.:58
Test Mode: 802.11ac (VHT80 MIMO)
Polarity: Horizontal
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5290	90.22	42.42	N/A	N/A	12.40	35.40
2	5210	50.77	2.97	-17.43	68.20	12.40	35.40

Carrier frequency (MHz): 5290 MHz
Channel No.:58
Test Mode: 802.11ac (VHT80 MIMO)
Polarity: Vertical
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5290	91.11	43.31	N/A	N/A	12.40	35.40
2	5210	40.54	-7.26	-13.46	54.00	12.40	35.40

Carrier frequency (MHz): 5290 MHz
Channel No.:58
Test Mode: 802.11ac (VHT80 MIMO)
Polarity: Horizontal
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5290	86.89	39.09	N/A	N/A	12.40	35.40
2	5210	40.09	-7.71	-13.91	54.00	12.40	35.40

Carrier frequency (MHz): 5500 MHz
Channel No.:100
Test Mode: 802.11a(Chain1)
Polarity: Vertical
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5500	99.01	51.71	N/A	N/A	12.70	34.60
2	5480	51.83	4.53	-16.37	68.20	12.70	34.60

Carrier frequency (MHz): 5500 MHz
Channel No.:100
Test Mode: 802.11a(Chain1)
Polarity: Horizontal
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5500	96.10	48.80	N/A	N/A	12.70	34.60
2	5480	51.28	3.98	-16.92	68.20	12.70	34.60

Carrier frequency (MHz): 5500 MHz
Channel No.:100
Test Mode: 802.11a(Chain1)
Polarity: Vertical
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5500	93.96	46.66	N/A	N/A	12.70	34.60
2	5480	41.98	-5.32	-12.02	54.00	12.70	34.60

Carrier frequency (MHz): 5500 MHz

Channel No.:100

Test Mode: 802.11a(Chain1)

Polarity: Horizontal

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5500	91.31	44.01	N/A	N/A	12.70	34.60
2	5480	40.69	-6.61	-13.31	54.00	12.70	34.60

Carrier frequency (MHz): 5825 MHz

Channel No.:165

Test Mode: 802.11a(Chain1)

Polarity: Vertical

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5825	100.36	52.76	N/A	N/A	12.90	34.70
2	5845	52.14	4.54	-16.06	68.20	12.90	34.70

Carrier frequency (MHz): 5825 MHz

Channel No.:165

Test Mode: 802.11a(Chain1)

Polarity: Horizontal

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5825	95.50	47.90	N/A	N/A	12.90	34.70
2	5845	51.24	3.64	-16.96	68.20	12.90	34.70

Carrier frequency (MHz): 5825 MHz

Channel No.:165

Test Mode: 802.11a(Chain1)

Polarity: Vertical

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5825	93.93	46.33	N/A	N/A	12.90	34.70
2	5845	41.88	-5.72	-12.12	54.00	12.90	34.70

Carrier frequency (MHz): 5825 MHz

Channel No.:165

Test Mode: 802.11a(Chain1)

Polarity: Horizontal

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5825	89.80	42.20	N/A	N/A	12.90	34.70
2	5845	41.13	-6.47	-12.87	54.00	12.90	34.70

Carrier frequency (MHz): 5500 MHz

Channel No.:100

Test Mode: 802.11n (HT20 MIMO)

Polarity: Vertical

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5500	100.42	53.12	N/A	N/A	12.70	34.60
2	5480	51.54	4.24	-16.66	68.20	12.70	34.60

Carrier frequency (MHz): 5500 MHz

Channel No.:100

Test Mode: 802.11n (HT20 MIMO)

Polarity: Horizontal

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5500	97.75	50.45	N/A	N/A	12.70	34.60
2	5480	50.01	2.71	-18.19	68.20	12.70	34.60

Carrier frequency (MHz): 5500 MHz

Channel No.:100

Test Mode: 802.11n (HT20 MIMO)

Polarity: Vertical

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5500	94.35	47.05	N/A	N/A	12.70	34.60
2	5480	41.78	-5.52	-12.22	54.00	12.70	34.60

Carrier frequency (MHz): 5500 MHz

Channel No.:100

Test Mode: 802.11n (HT20 MIMO)

Polarity: Horizontal

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5500	91.07	43.77	N/A	N/A	12.70	34.60
2	5480	39.87	-7.43	-14.13	54.00	12.70	34.60

Carrier frequency (MHz): 5825 MHz

Channel No.:165

Test Mode: 802.11n (HT20 MIMO)

Polarity: Vertical

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5825	100.23	52.63	N/A	N/A	12.90	34.70
2	5845	52.56	4.96	-15.64	68.20	12.90	34.70

Carrier frequency (MHz): 5825 MHz

Channel No.:165

Test Mode: 802.11n (HT20 MIMO)

Polarity: Horizontal

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5825	97.62	50.02	N/A	N/A	12.90	34.70
2	5845	52.04	4.44	-16.16	68.20	12.90	34.70

Carrier frequency (MHz): 5825 MHz

Channel No.:165

Test Mode: 802.11n (HT20 MIMO)

Polarity: Vertical

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5825	93.57	45.97	N/A	N/A	12.90	34.70
2	5845	40.15	-7.45	-13.85	54.00	12.90	34.70

Carrier frequency (MHz): 5825 MHz

Channel No.:165

Test Mode: 802.11n (HT20 MIMO)

Polarity: Horizontal

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5825	91.54	43.94	N/A	N/A	12.90	34.70
2	5845	39.86	-7.74	-14.14	54.00	12.90	34.70

Carrier frequency (MHz): 5500 MHz

Channel No.:100

Test Mode: 802.11ac (VHT20 MIMO)

Polarity: Vertical

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5500	100.75	53.45	N/A	N/A	12.70	34.60
2	5480	52.56	5.26	-15.64	68.20	12.70	34.60

Carrier frequency (MHz): 5500 MHz

Channel No.:100

Test Mode: 802.11ac (VHT20 MIMO)

Polarity: Horizontal

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5500	97.71	50.41	N/A	N/A	12.70	34.60
2	5480	51.99	4.69	-16.21	68.20	12.70	34.60

Carrier frequency (MHz): 5500 MHz

Channel No.:100

Test Mode: 802.11ac (VHT20 MIMO)

Polarity: Vertical

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5500	94.50	47.20	N/A	N/A	12.70	34.60
2	5480	41.56	-5.74	-12.44	54.00	12.70	34.60

Carrier frequency (MHz): 5500 MHz
Channel No.:100
Test Mode: 802.11ac (VHT20 MIMO)
Polarity: Horizontal
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5500	92.38	45.08	N/A	N/A	12.70	34.60
2	5480	39.74	-7.56	-14.26	54.00	12.70	34.60

Carrier frequency (MHz): 5825 MHz
Channel No.:165
Test Mode: 802.11ac (VHT20 MIMO)
Polarity: Vertical
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5825	100.43	52.83	N/A	N/A	12.90	34.70
2	5845	52.18	4.58	-16.02	68.20	12.90	34.70

Carrier frequency (MHz): 5825 MHz
Channel No.:165
Test Mode: 802.11ac (VHT20 MIMO)
Polarity: Horizontal
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5825	96.24	48.64	N/A	N/A	12.90	34.70
2	5845	51.33	3.73	-16.87	68.20	12.90	34.70

Carrier frequency (MHz): 5825 MHz
Channel No.:165
Test Mode: 802.11ac (VHT20 MIMO)
Polarity: Vertical
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5825	93.67	46.07	N/A	N/A	12.90	34.70
2	5845	41.00	-6.60	-13.00	54.00	12.90	34.70

Carrier frequency (MHz): 5825 MHz
Channel No.:165
Test Mode: 802.11ac (VHT20 MIMO)
Polarity: Horizontal
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5825	90.59	42.99	N/A	N/A	12.90	34.70
2	5845	40.84	-6.76	-13.16	54.00	12.90	34.70

Carrier frequency (MHz): 5510 MHz
Channel No.:102
Test Mode: 802.11n (HT40 MIMO)
Polarity: Vertical
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5510	100.86	53.56	N/A	N/A	12.70	34.60
2	5470	52.31	5.01	-15.89	68.20	12.70	34.60

Carrier frequency (MHz): 5510 MHz
Channel No.:102
Test Mode: 802.11n (HT40 MIMO)
Polarity: Horizontal
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5510	98.55	51.25	N/A	N/A	12.70	34.60
2	5470	50.45	3.15	-17.75	68.20	12.70	34.60

Carrier frequency (MHz): 5510 MHz
Channel No.:102
Test Mode: 802.11n (HT40 MIMO)
Polarity: Vertical
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5510	93.78	46.48	N/A	N/A	12.70	34.60
2	5470	41.94	-5.36	-12.06	54.00	12.70	34.60

Carrier frequency (MHz): 5510 MHz

Channel No.:102

Test Mode: 802.11n (HT40 MIMO)

Polarity: Horizontal

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5510	90.99	43.69	N/A	N/A	12.70	34.60
2	5470	41.16	-6.14	-12.84	54.00	12.70	34.60

Carrier frequency (MHz): 5795 MHz

Channel No.:159

Test Mode: 802.11n (HT40 MIMO)

Polarity: Vertical

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5795	99.96	52.36	N/A	N/A	12.90	34.70
2	5835	52.85	5.25	-15.35	68.20	12.90	34.70

Carrier frequency (MHz): 5795 MHz

Channel No.:159

Test Mode: 802.11n (HT40 MIMO)

Polarity: Horizontal

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5795	95.17	47.57	N/A	N/A	12.90	34.70
2	5835	51.94	4.34	-16.26	68.20	12.90	34.70

Carrier frequency (MHz): 5795 MHz

Channel No.:159

Test Mode: 802.11n (HT40 MIMO)

Polarity: Vertical

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5795	93.46	45.86	N/A	N/A	12.90	34.70
2	5835	40.73	-6.87	-13.27	54.00	12.90	34.70

Carrier frequency (MHz): 5795 MHz

Channel No.:159

Test Mode: 802.11n (HT40 MIMO)

Polarity: Horizontal

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5795	89.67	42.07	N/A	N/A	12.90	34.70
2	5835	39.53	-8.07	-14.47	54.00	12.90	34.70

Carrier frequency (MHz): 5510 MHz

Channel No.:102

Test Mode: 802.11ac (VHT40 MIMO)

Polarity: Vertical

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5510	100.91	53.61	N/A	N/A	12.70	34.60
2	5470	51.61	4.31	-16.59	68.20	12.70	34.60

Carrier frequency (MHz): 5510 MHz

Channel No.:102

Test Mode: 802.11ac (VHT40 MIMO)

Polarity: Horizontal

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5510	97.45	50.15	N/A	N/A	12.70	34.60
2	5470	50.22	2.92	-17.98	68.20	12.70	34.60

Carrier frequency (MHz): 5510 MHz

Channel No.:102

Test Mode: 802.11ac (VHT40 MIMO)

Polarity: Vertical

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5510	94.38	47.08	N/A	N/A	12.70	34.60
2	5470	41.93	-5.37	-12.07	54.00	12.70	34.60

Carrier frequency (MHz): 5510 MHz
Channel No.:102
Test Mode: 802.11ac (VHT40 MIMO)
Polarity: Horizontal
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5510	91.66	44.36	N/A	N/A	12.70	34.60
2	5470	40.42	-6.88	-13.58	54.00	12.70	34.60

Carrier frequency (MHz): 5795 MHz
Channel No.:159
Test Mode: 802.11ac (VHT40 MIMO)
Polarity: Vertical
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5795	100.34	52.74	N/A	N/A	12.90	34.70
2	5835	52.99	5.39	-15.21	68.20	12.90	34.70

Carrier frequency (MHz): 5795 MHz
Channel No.:159
Test Mode: 802.11ac (VHT40 MIMO)
Polarity: Horizontal
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5795	97.65	50.05	N/A	N/A	12.90	34.70
2	5835	51.98	4.38	-16.22	68.20	12.90	34.70

Carrier frequency (MHz): 5795 MHz
Channel No.:159
Test Mode: 802.11ac (VHT40 MIMO)
Polarity: Vertical
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5795	94.34	46.74	N/A	N/A	12.90	34.70
2	5835	41.87	-5.73	-12.13	54.00	12.90	34.70

Carrier frequency (MHz): 5795 MHz
Channel No.:159
Test Mode: 802.11ac (VHT40 MIMO)
Polarity: Horizontal
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5795	91.46	43.86	N/A	N/A	12.90	34.70
2	5835	41.79	-5.81	-12.21	54.00	12.90	34.70

Carrier frequency (MHz): 5530 MHz
Channel No.:106
Test Mode: 802.11ac (VHT80 MIMO)
Polarity: Vertical
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5530	100.27	52.97	N/A	N/A	12.70	34.60
2	5450	52.81	5.51	-15.39	68.20	12.70	34.60

Carrier frequency (MHz): 5530 MHz
Channel No.:106
Test Mode: 802.11ac (VHT80 MIMO)
Polarity: Horizontal
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5530	96.83	49.53	N/A	N/A	12.70	34.60
2	5450	52.58	5.28	-15.62	68.20	12.70	34.60

Carrier frequency (MHz): 5530 MHz
Channel No.:106
Test Mode: 802.11ac (VHT80 MIMO)
Polarity: Vertical
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5530	94.83	47.53	N/A	N/A	12.70	34.60
2	5450	41.55	-5.75	-12.45	54.00	12.70	34.60

Carrier frequency (MHz): 5530 MHz
Channel No.:106
Test Mode: 802.11ac (VHT80 MIMO)
Polarity: Horizontal
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5530	91.26	43.96	N/A	N/A	12.70	34.60
2	5450	39.74	-7.56	-14.26	54.00	12.70	34.60

Carrier frequency (MHz): 5775 MHz
Channel No.:155
Test Mode: 802.11ac (VHT80 MIMO)
Polarity: Vertical
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5775	100.45	52.85	N/A	N/A	12.90	34.70
2	5695	52.31	4.71	-15.89	68.20	12.90	34.70

Carrier frequency (MHz): 5775 MHz
Channel No.:155
Test Mode: 802.11ac (VHT80 MIMO)
Polarity: Horizontal
Detector: Peak


No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5775	95.63	48.03	N/A	N/A	12.90	34.70
2	5695	50.60	3.00	-17.60	68.20	12.90	34.70

Carrier frequency (MHz): 5775 MHz
Channel No.:155
Test Mode: 802.11ac (VHT80 MIMO)
Polarity: Vertical
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5775	94.34	46.74	N/A	N/A	12.90	34.70
2	5695	41.60	-6.00	-12.40	54.00	12.90	34.70

Carrier frequency (MHz): 5775 MHz
Channel No.:155
Test Mode: 802.11ac (VHT80 MIMO)
Polarity: Horizontal
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuv/m)	cable loss (dB)	antenna factor (dB)
1	5775	90.41	42.81	N/A	N/A	12.90	34.70
2	5695	41.23	-6.37	-12.77	54.00	12.90	34.70

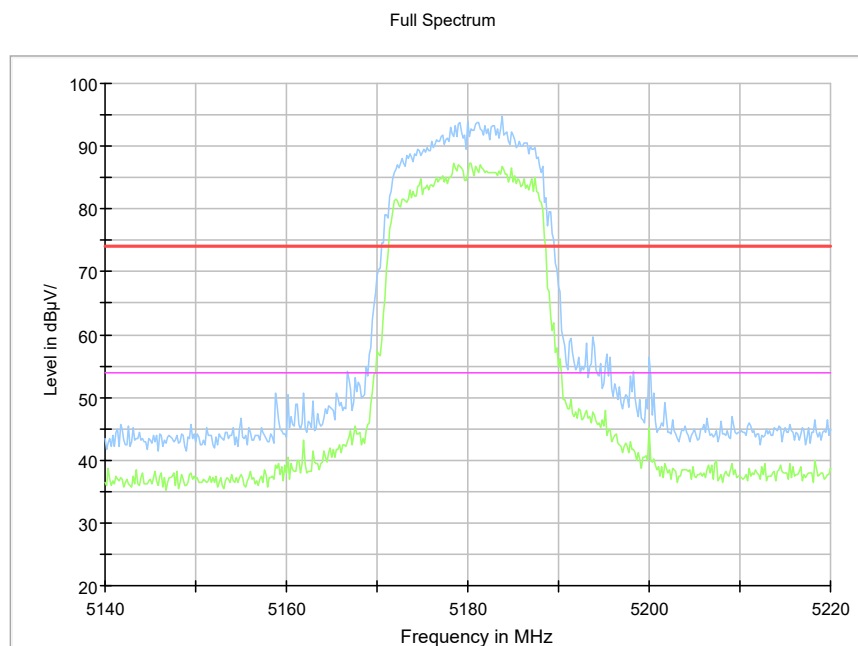

Radiated Emission Band Edge for 5180MHz

Sample Calculations

Determining Spurious Emissions Levels

A “reference path loss” is established and the A_{Rpl} is the attenuation of “reference path loss”, and including the gain of receive antenna, the gain of the preamplifier, the cable loss.

The measurement results are obtained as described below:

$$\text{Result} = P_{\text{mea}} + A_{Rpl}$$

Sample calculation: $(24.76 \text{ dB}\mu\text{V/m}) = (41.86 \text{ dB}\mu\text{V}) + (-17.1 \text{ dB/m})$, the corresponding frequency is 50.27MHz.

For 802.11a(Chain1) Channel No.:36

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
32.764500	32.95	-20.8	53.75	Vertical	40.00
84.126000	26.23	-23.3	49.53	Vertical	40.00
150.280000	23.43	-22.5	45.93	Vertical	43.50
215.997500	27.63	-18.2	45.83	Vertical	43.50
359.994000	29.52	-13.8	43.32	Vertical	46.00
959.987500	30.14	-2.8	32.94	Vertical	46.00

For 802.11n(HT20 MIMO) Channel No.:36

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
32.667500	32.91	-20.8	53.71	Vertical	40.00
84.126000	26.25	-23.3	49.55	Vertical	40.00
150.280000	23.17	-22.5	45.67	Vertical	43.50
215.997500	27.61	-18.2	45.81	Vertical	43.50
359.994000	29.49	-13.8	43.29	Vertical	46.00
959.987500	30.12	-2.8	32.92	Vertical	46.00

For 802.11ac(VHT20 MIMO) Channel No.:36

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
32.619000	32.35	-20.8	53.15	Vertical	40.00
84.126000	26.26	-23.3	49.56	Vertical	40.00
150.280000	23.10	-22.5	45.60	Vertical	43.50
215.997500	27.60	-18.2	45.80	Vertical	43.50
359.994000	29.50	-13.8	43.30	Vertical	46.00
959.987500	30.20	-2.8	33.00	Vertical	46.00

For 802.11a(Chain1) Channel No.:44

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
32.716000	33.09	-20.8	53.89	Vertical	40.00
78.112000	25.03	-23.9	48.93	Vertical	40.00
150.280000	23.13	-22.5	45.63	Vertical	43.50
215.997500	27.60	-18.2	45.80	Vertical	43.50
359.994000	29.42	-13.8	43.22	Vertical	46.00
959.987500	30.10	-2.8	32.90	Vertical	46.00

For 802.11n(HT20 MIMO) Channel No.:44

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
32.473500	32.43	-20.8	53.23	Vertical	40.00
78.112000	25.08	-23.9	48.98	Vertical	40.00
150.280000	23.24	-22.5	45.74	Vertical	43.50
215.997500	27.71	-18.2	45.91	Vertical	43.50
359.994000	29.44	-13.8	43.24	Vertical	46.00
959.987500	30.12	-2.8	32.92	Vertical	46.00

For 802.11ac(VHT20 MIMO) Channel No.:44

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
32.716000	33.15	-20.8	53.95	Vertical	40.00
72.098000	25.00	-22.3	47.30	Vertical	40.00
150.280000	23.27	-22.5	45.77	Vertical	43.50
215.997500	27.76	-18.2	45.96	Vertical	43.50
359.994000	29.43	-13.8	43.23	Vertical	46.00
959.987500	30.13	-2.8	32.93	Vertical	46.00

For 802.11a(Chain1) Channel No.:48

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
32.716000	33.12	-20.8	53.92	Vertical	40.00
78.112000	25.07	-23.9	48.97	Vertical	40.00
150.280000	23.29	-22.5	45.79	Vertical	43.50
215.997500	27.77	-18.2	45.97	Vertical	43.50
359.994000	29.43	-13.8	43.23	Vertical	46.00
959.987500	30.14	-2.8	32.94	Vertical	46.00

For 802.11n(HT20 MIMO) Channel No.:48

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
31.891500	31.23	-20.9	52.13	Vertical	40.00
75.105000	25.80	-23.4	49.20	Vertical	40.00
150.280000	23.20	-22.5	45.70	Vertical	43.50
215.997500	27.77	-18.2	45.97	Vertical	43.50
359.994000	29.45	-13.8	43.25	Vertical	46.00
959.987500	30.12	-2.8	32.92	Vertical	46.00

For 802.11ac(VHT20 MIMO) Channel No.:48

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
32.619000	32.33	-20.8	53.13	Vertical	40.00
78.112000	25.10	-23.9	49.00	Vertical	40.00
150.280000	23.42	-22.5	45.92	Vertical	43.50
215.997500	27.79	-18.2	45.99	Vertical	43.50
359.994000	29.45	-13.8	43.25	Vertical	46.00
995.829000	25.88	-2.3	28.18	Vertical	54.00

For 802.11n(HT40 MIMO) Channel No.:38

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
32.813000	32.35	-20.8	53.15	Vertical	40.00
72.098000	24.64	-22.3	46.94	Vertical	40.00
150.280000	23.14	-22.5	45.64	Vertical	43.50
215.997500	27.79	-18.2	45.99	Vertical	43.50
359.994000	29.47	-13.8	43.27	Vertical	46.00
959.987500	30.13	-2.8	32.93	Vertical	46.00

For 802.11ac(VHT40 MIMO) Channel No.:38

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
33.443500	32.19	-20.7	52.89	Vertical	40.00
78.112000	25.05	-23.9	48.95	Vertical	40.00
150.280000	23.21	-22.5	45.71	Vertical	43.50
215.997500	27.81	-18.2	46.01	Vertical	43.50
359.994000	29.45	-13.8	43.25	Vertical	46.00
959.987500	30.14	-2.8	32.94	Vertical	46.00

For 802.11n(HT40 MIMO) Channel No.:46

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
31.891500	31.27	-20.9	52.17	Vertical	40.00
78.112000	25.06	-23.9	48.96	Vertical	40.00
150.280000	23.34	-22.5	45.84	Vertical	43.50
215.997500	27.79	-18.2	45.99	Vertical	43.50
359.994000	29.48	-13.8	43.28	Vertical	46.00
959.987500	30.16	-2.8	32.96	Vertical	46.00

For 802.11ac(VHT40 MIMO) Channel No.:46

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
32.619000	32.36	-20.8	53.16	Vertical	40.00
75.105000	25.82	-23.4	49.22	Vertical	40.00
150.280000	23.47	-22.5	45.97	Vertical	43.50
215.997500	27.77	-18.2	45.97	Vertical	43.50
359.994000	29.48	-13.8	43.28	Vertical	46.00
959.987500	30.15	-2.8	32.95	Vertical	46.00

For 802.11ac(VHT80 MIMO) Channel No.:42

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
33.346500	32.27	-20.7	52.97	Vertical	40.00
84.126000	26.25	-23.3	49.55	Vertical	40.00
150.280000	23.58	-22.5	46.08	Vertical	43.50
215.997500	27.76	-18.2	45.96	Vertical	43.50
359.994000	29.45	-13.8	43.25	Vertical	46.00
959.987500	30.11	-2.8	32.91	Vertical	46.00

For 802.11a(Chain1) Channel No.:52

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
32.716000	33.27	-20.8	54.07	Vertical	40.00
78.112000	24.99	-23.9	48.89	Vertical	40.00
150.280000	23.71	-22.5	46.21	Vertical	43.50
215.997500	27.75	-18.2	45.95	Vertical	43.50
359.994000	29.50	-13.8	43.30	Vertical	46.00
959.987500	30.11	-2.8	32.91	Vertical	46.00

For 802.11n(HT20 MIMO) Channel No.:52

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
32.231000	31.45	-20.9	52.35	Vertical	40.00
78.112000	25.01	-23.9	48.91	Vertical	40.00
150.280000	23.68	-22.5	46.18	Vertical	43.50
215.997500	27.76	-18.2	45.96	Vertical	43.50
359.994000	29.49	-13.8	43.29	Vertical	46.00
959.987500	30.15	-2.8	32.95	Vertical	46.00

For 802.11ac(VHT20 MIMO) Channel No.:52

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
32.716000	33.35	-20.8	54.15	Vertical	40.00
84.126000	26.29	-23.3	49.59	Vertical	40.00
150.280000	23.61	-22.5	46.11	Vertical	43.50
215.997500	27.78	-18.2	45.98	Vertical	43.50
359.994000	29.48	-13.8	43.28	Vertical	46.00
959.987500	30.11	-2.8	32.91	Vertical	46.00

For 802.11a(Chain1) Channel No.:60

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
32.231000	31.26	-20.9	52.16	Vertical	40.00
84.126000	26.33	-23.3	49.63	Vertical	40.00
150.280000	23.43	-22.5	45.93	Vertical	43.50
215.997500	27.82	-18.2	46.02	Vertical	43.50
359.994000	29.48	-13.8	43.28	Vertical	46.00
959.987500	30.15	-2.8	32.95	Vertical	46.00

For 802.11n(HT20 MIMO) Channel No.:60

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
32.570500	32.11	-20.8	52.91	Vertical	40.00
78.112000	25.03	-23.9	48.93	Vertical	40.00
150.280000	23.30	-22.5	45.80	Vertical	43.50
215.997500	27.79	-18.2	45.99	Vertical	43.50
359.994000	29.44	-13.8	43.24	Vertical	46.00
959.987500	30.13	-2.8	32.93	Vertical	46.00

For 802.11ac(VHT20 MIMO) Channel No.:60

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
32.667500	32.97	-20.8	53.77	Vertical	40.00
84.126000	26.43	-23.3	49.73	Vertical	40.00
150.280000	23.34	-22.5	45.84	Vertical	43.50
215.997500	27.83	-18.2	46.03	Vertical	43.50
359.994000	29.44	-13.8	43.24	Vertical	46.00
959.987500	30.09	-2.8	32.89	Vertical	46.00

For 802.11a(Chain1) Channel No.:64

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
34.219500	29.68	-20.6	50.28	Vertical	40.00
84.126000	26.40	-23.3	49.70	Vertical	40.00
150.280000	23.42	-22.5	45.92	Vertical	43.50
215.997500	27.88	-18.2	46.08	Vertical	43.50
359.994000	29.47	-13.8	43.27	Vertical	46.00
995.441000	25.53	-2.3	27.83	Vertical	54.00

For 802.11n(HT20 MIMO) Channel No.:64

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
32.716000	33.24	-20.8	54.04	Vertical	40.00
78.112000	24.74	-23.9	48.64	Vertical	40.00
150.280000	23.33	-22.5	45.83	Vertical	43.50
215.997500	27.87	-18.2	46.07	Vertical	43.50
359.994000	29.47	-13.8	43.27	Vertical	46.00
959.987500	30.12	-2.8	32.92	Vertical	46.00

For 802.11ac(VHT20 MIMO) Channel No.:64

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
32.522000	32.49	-20.8	53.29	Vertical	40.00
84.126000	26.41	-23.3	49.71	Vertical	40.00
150.280000	23.32	-22.5	45.82	Vertical	43.50
215.997500	27.92	-18.2	46.12	Vertical	43.50
359.994000	29.45	-13.8	43.25	Vertical	46.00
959.987500	30.10	-2.8	32.90	Vertical	46.00

For 802.11n(HT40 MIMO) Channel No.:54

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
33.298000	31.76	-20.7	52.46	Vertical	40.00
75.105000	25.65	-23.4	49.05	Vertical	40.00
150.280000	23.33	-22.5	45.83	Vertical	43.50
215.997500	27.89	-18.2	46.09	Vertical	43.50
359.994000	29.48	-13.8	43.28	Vertical	46.00
959.987500	30.09	-2.8	32.89	Vertical	46.00

For 802.11ac(VHT40 MIMO) Channel No.:54

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
32.764500	33.16	-20.8	53.96	Vertical	40.00
84.174500	28.07	-23.3	51.37	Vertical	40.00
150.280000	23.32	-22.5	45.82	Vertical	43.50
215.997500	27.94	-18.2	46.14	Vertical	43.50
359.994000	29.48	-13.8	43.28	Vertical	46.00
959.987500	30.12	-2.8	32.92	Vertical	46.00

For 802.11n(HT40 MIMO) Channel No.:62

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
32.473500	32.77	-20.8	53.57	Vertical	40.00
72.098000	24.93	-22.3	47.23	Vertical	40.00
150.280000	23.33	-22.5	45.83	Vertical	43.50
215.997500	27.88	-18.2	46.08	Vertical	43.50
359.994000	29.45	-13.8	43.25	Vertical	46.00
959.987500	30.11	-2.8	32.91	Vertical	46.00

For 802.11ac(VHT40 MIMO) Channel No.:62

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
32.716000	33.40	-20.8	54.20	Vertical	40.00
78.112000	24.85	-23.9	48.75	Vertical	40.00
150.280000	23.32	-22.5	45.82	Vertical	43.50
215.997500	27.91	-18.2	46.11	Vertical	43.50
359.994000	29.45	-13.8	43.25	Vertical	46.00
959.987500	30.11	-2.8	32.91	Vertical	46.00

For 802.11ac(VHT80 MIMO) Channel No.:58

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
32.764500	33.17	-20.8	53.97	Vertical	40.00
75.153500	27.45	-23.4	50.85	Vertical	40.00
150.280000	23.34	-22.5	45.84	Vertical	43.50
215.997500	27.91	-18.2	46.11	Vertical	43.50
359.994000	29.46	-13.8	43.26	Vertical	46.00
999.321000	27.32	-2.2	29.52	Vertical	54.00

For 802.11a(Chain1) Channel No.:100

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
33.298000	31.87	-20.7	52.57	Vertical	40.00
84.126000	26.44	-23.3	49.74	Vertical	40.00
150.280000	23.35	-22.5	45.85	Vertical	43.50
215.997500	27.94	-18.2	46.14	Vertical	43.50
359.994000	29.44	-13.8	43.24	Vertical	46.00
959.987500	30.11	-2.8	32.91	Vertical	46.00

For 802.11n(HT20 MIMO) Channel No.:100

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
32.619000	32.50	-20.8	53.30	Vertical	40.00
72.098000	24.87	-22.3	47.17	Vertical	40.00
150.280000	23.33	-22.5	45.83	Vertical	43.50
215.997500	27.92	-18.2	46.12	Vertical	43.50
359.994000	29.42	-13.8	43.22	Vertical	46.00
959.987500	30.12	-2.8	32.92	Vertical	46.00

For 802.11ac(VHT20 MIMO) Channel No.:100

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
33.346500	32.36	-20.7	53.06	Vertical	40.00
78.112000	24.79	-23.9	48.69	Vertical	40.00
150.280000	23.32	-22.5	45.82	Vertical	43.50
215.997500	27.93	-18.2	46.13	Vertical	43.50
359.994000	29.43	-13.8	43.23	Vertical	46.00
959.987500	30.08	-2.8	32.88	Vertical	46.00

For 802.11a(Chain1) Channel No.:120

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
32.425000	32.43	-20.8	53.23	Vertical	40.00
75.105000	25.71	-23.4	49.11	Vertical	40.00
150.280000	23.32	-22.5	45.82	Vertical	43.50
215.997500	27.92	-18.2	46.12	Vertical	43.50
359.994000	29.43	-13.8	43.23	Vertical	46.00
959.987500	30.09	-2.8	32.89	Vertical	46.00

For 802.11n(HT20 MIMO) Channel No.:120

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
32.813000	32.64	-20.8	53.44	Vertical	40.00
84.126000	26.43	-23.3	49.73	Vertical	40.00
150.280000	23.32	-22.5	45.82	Vertical	43.50
215.949000	24.38	-18.2	42.58	Vertical	43.50
359.994000	29.44	-13.8	43.24	Vertical	46.00
959.987500	30.09	-2.8	32.89	Vertical	46.00

For 802.11ac(VHT20 MIMO) Channel No.:120

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
32.619000	32.47	-20.8	32.47	Vertical	40.00
78.112000	24.86	-23.9	24.86	Vertical	40.00
150.280000	23.33	-22.5	23.33	Vertical	43.50
215.997500	27.94	-18.2	27.94	Vertical	43.50
359.994000	29.43	-13.8	29.43	Vertical	46.00
996.944500	26.38	-2.3	26.38	Vertical	54.00

For 802.11a(Chain1) Channel No.:144

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
32.716000	33.44	-20.8	54.24	Vertical	40.00
75.105000	25.79	-23.4	49.19	Vertical	40.00
150.280000	23.28	-22.5	45.78	Vertical	43.50
215.997500	28.11	-18.2	46.31	Vertical	43.50
359.994000	29.38	-13.8	43.18	Vertical	46.00
959.987500	30.13	-2.8	32.93	Vertical	46.00

For 802.11n(HT20 MIMO) Channel No.:144

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
32.716000	33.34	-20.8	54.14	Vertical	40.00
84.126000	26.49	-23.3	49.79	Vertical	40.00
150.280000	23.34	-22.5	45.84	Vertical	43.50
215.997500	28.00	-18.2	46.20	Vertical	43.50
359.994000	29.43	-13.8	43.23	Vertical	46.00
959.987500	30.10	-2.8	32.90	Vertical	46.00

For 802.11ac(VHT20 MIMO) Channel No.:144

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
32.619000	32.68	-20.8	53.48	Vertical	40.00
84.126000	26.45	-23.3	49.75	Vertical	40.00
150.280000	23.32	-22.5	45.82	Vertical	43.50
215.949000	24.41	-18.2	42.61	Vertical	43.50
359.994000	29.40	-13.8	43.20	Vertical	46.00
959.987500	30.11	-2.8	32.91	Vertical	46.00

For 802.11n(HT40 MIMO) Channel No.:102

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
32.619000	32.68	-20.8	53.48	Vertical	40.00
72.098000	25.05	-22.3	47.35	Vertical	40.00
150.280000	23.33	-22.5	45.83	Vertical	43.50
215.997500	27.98	-18.2	46.18	Vertical	43.50
359.994000	29.40	-13.8	43.20	Vertical	46.00
997.138500	27.08	-2.2	29.28	Vertical	54.00

For 802.11ac(VHT40 MIMO) Channel No.:102

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
32.716000	33.51	-20.8	54.31	Vertical	40.00
84.174500	28.08	-23.3	51.38	Vertical	40.00
150.280000	23.36	-22.5	45.86	Vertical	43.50
215.997500	27.94	-18.2	46.14	Vertical	43.50
359.994000	29.42	-13.8	43.22	Vertical	46.00
955.913500	27.26	-2.9	30.16	Vertical	46.00

For 802.11n(HT40 MIMO) Channel No.:118

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
32.473500	32.71	-20.8	53.51	Vertical	40.00
84.126000	26.41	-23.3	49.71	Vertical	40.00
150.280000	23.27	-22.5	45.77	Vertical	43.50
215.997500	27.91	-18.2	46.11	Vertical	43.50
359.994000	29.43	-13.8	43.23	Vertical	46.00
959.987500	30.06	-2.8	32.86	Vertical	46.00

For 802.11ac(VHT40 MIMO) Channel No.:118

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
32.716000	33.40	-20.8	54.20	Vertical	40.00
72.098000	25.04	-22.3	47.34	Vertical	40.00
150.280000	23.28	-22.5	45.78	Vertical	43.50
215.997500	27.99	-18.2	46.19	Vertical	43.50
359.994000	29.36	-13.8	43.16	Vertical	46.00
959.987500	30.09	-2.8	32.89	Vertical	46.00

For 802.11n(HT40 MIMO) Channel No.:142

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
32.716000	33.45	-20.8	54.25	Vertical	40.00
75.153500	27.56	-23.4	50.96	Vertical	40.00
150.280000	23.30	-22.5	45.80	Vertical	43.50
215.997500	28.00	-18.2	46.20	Vertical	43.50
359.994000	29.40	-13.8	43.20	Vertical	46.00
959.987500	30.09	-2.8	32.89	Vertical	46.00

For 802.11ac(VHT40 MIMO) Channel No.:142

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
32.376500	32.02	-20.8	52.82	Vertical	40.00
78.112000	24.84	-23.9	48.74	Vertical	40.00
150.280000	23.30	-22.5	45.80	Vertical	43.50
215.997500	28.01	-18.2	46.21	Vertical	43.50
359.994000	29.41	-13.8	43.21	Vertical	46.00
959.987500	30.10	-2.8	32.90	Vertical	46.00

For 802.11ac(VHT80 MIMO) Channel No.:106

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
32.473500	32.62	-20.8	53.42	Vertical	40.00
78.112000	24.88	-23.9	48.78	Vertical	40.00
150.280000	23.27	-22.5	45.77	Vertical	43.50
215.997500	28.04	-18.2	46.24	Vertical	43.50
359.994000	29.37	-13.8	43.17	Vertical	46.00
959.987500	30.14	-2.8	32.94	Vertical	46.00

For 802.11ac(VHT80 MIMO) Channel No.:122

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
33.395000	32.66	-20.7	53.36	Vertical	40.00
72.098000	24.92	-22.3	47.22	Vertical	40.00
150.280000	23.24	-22.5	45.74	Vertical	43.50
215.997500	27.99	-18.2	46.19	Vertical	43.50
359.994000	29.38	-13.8	43.18	Vertical	46.00
959.987500	30.12	-2.8	32.92	Vertical	46.00

For 802.11ac(VHT80 MIMO) Channel No.:138

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
32.716000	33.27	-20.8	54.07	Vertical	40.00
78.112000	24.85	-23.9	48.75	Vertical	40.00
150.280000	23.26	-22.5	45.76	Vertical	43.50
215.997500	28.03	-18.2	46.23	Vertical	43.50
359.994000	29.38	-13.8	43.18	Vertical	46.00
959.987500	30.09	-2.8	32.89	Vertical	46.00

For 802.11a(Chain1) Channel No.:149

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
32.522000	32.40	-20.8	53.20	Vertical	40.00
75.105000	25.75	-23.4	49.15	Vertical	40.00
150.280000	23.27	-22.5	45.77	Vertical	43.50
215.997500	27.92	-18.2	46.12	Vertical	43.50
359.994000	29.42	-13.8	43.22	Vertical	46.00
959.987500	30.13	-2.8	32.93	Vertical	46.00

For 802.11n(HT20 MIMO) Channel No.:149

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
32.376500	32.15	-20.8	52.95	Vertical	40.00
84.126000	26.35	-23.3	49.65	Vertical	40.00
150.280000	23.56	-22.5	46.06	Vertical	43.50
215.997500	27.96	-18.2	46.16	Vertical	43.50
359.994000	29.39	-13.8	43.19	Vertical	46.00
959.987500	30.12	-2.8	32.92	Vertical	46.00

For 802.11ac(VHT20 MIMO) Channel No.:149

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
33.346500	32.31	-20.7	53.01	Vertical	40.00
72.098000	24.90	-22.3	47.20	Vertical	40.00
150.280000	23.24	-22.5	45.74	Vertical	43.50
215.997500	27.90	-18.2	46.10	Vertical	43.50
359.994000	29.45	-13.8	43.25	Vertical	46.00
959.987500	30.12	-2.8	32.92	Vertical	46.00

For 802.11a(Chain1) Channel No.:157

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
32.522000	32.39	-20.8	53.19	Vertical	40.00
84.126000	26.32	-23.3	49.62	Vertical	40.00
150.280000	23.27	-22.5	45.77	Vertical	43.50
215.997500	27.91	-18.2	46.11	Vertical	43.50
359.994000	29.41	-13.8	43.21	Vertical	46.00
959.987500	30.10	-2.8	32.90	Vertical	46.00

For 802.11n(HT20 MIMO) Channel No.:157

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
32.570500	32.24	-20.8	53.04	Vertical	40.00
84.126000	26.31	-23.3	49.61	Vertical	40.00
150.280000	23.28	-22.5	45.78	Vertical	43.50
215.997500	27.88	-18.2	46.08	Vertical	43.50
359.994000	29.41	-13.8	43.21	Vertical	46.00
959.987500	30.11	-2.8	32.91	Vertical	46.00

For 802.11ac(VHT20 MIMO) Channel No.:157

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
32.279500	31.46	-20.9	52.36	Vertical	40.00
84.126000	26.36	-23.3	49.66	Vertical	40.00
150.280000	23.42	-22.5	45.92	Vertical	43.50
215.997500	28.04	-18.2	46.24	Vertical	43.50
359.994000	29.38	-13.8	43.18	Vertical	46.00
959.987500	30.11	-2.8	32.91	Vertical	46.00

For 802.11a(Chain1) Channel No.:165

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
32.667500	32.86	-20.8	53.66	Vertical	40.00
84.126000	26.33	-23.3	49.63	Vertical	40.00
150.280000	23.27	-22.5	45.77	Vertical	43.50
215.949000	24.40	-18.2	42.60	Vertical	43.50
359.994000	29.40	-13.8	43.20	Vertical	46.00
959.987500	30.12	-2.8	32.92	Vertical	46.00

For 802.11n(HT20 MIMO) Channel No.:165

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
33.492000	31.55	-20.7	52.25	Vertical	40.00
78.112000	24.79	-23.9	48.69	Vertical	40.00
150.280000	23.26	-22.5	45.76	Vertical	43.50
215.997500	27.98	-18.2	46.18	Vertical	43.50
359.994000	29.39	-13.8	43.19	Vertical	46.00
959.987500	30.11	-2.8	32.91	Vertical	46.00

For 802.11ac(VHT20 MIMO) Channel No.:165

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
32.231000	31.39	-20.9	52.29	Vertical	40.00
84.126000	26.24	-23.3	49.54	Vertical	40.00
150.280000	23.27	-22.5	45.77	Vertical	43.50
215.997500	28.00	-18.2	46.20	Vertical	43.50
359.994000	29.40	-13.8	43.20	Vertical	46.00
998.787500	27.84	-2.2	30.04	Vertical	54.00

For 802.11n(HT40 MIMO) Channel No.:151

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
32.425000	32.07	-20.8	52.87	Vertical	40.00
84.126000	26.19	-23.3	49.49	Vertical	40.00
150.280000	23.30	-22.5	45.80	Vertical	43.50
215.997500	27.91	-18.2	46.11	Vertical	43.50
359.994000	29.48	-13.8	43.28	Vertical	46.00
959.987500	30.14	-2.8	32.94	Vertical	46.00

For 802.11ac(VHT40 MIMO) Channel No.:151

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
32.764500	33.02	-20.8	53.82	Vertical	40.00
84.126000	26.24	-23.3	49.54	Vertical	40.00
150.280000	23.25	-22.5	45.75	Vertical	43.50
215.997500	28.06	-18.2	46.26	Vertical	43.50
359.994000	29.40	-13.8	43.20	Vertical	46.00
959.987500	30.12	-2.8	32.92	Vertical	46.00

For 802.11n(HT40 MIMO) Channel No.:159

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
31.843000	30.57	-20.9	51.47	Vertical	40.00
75.105000	25.71	-23.4	49.11	Vertical	40.00
150.280000	23.24	-22.5	45.74	Vertical	43.50
215.997500	28.03	-18.2	46.23	Vertical	43.50
359.994000	29.37	-13.8	43.17	Vertical	46.00
959.987500	30.13	-2.8	32.93	Vertical	46.00


For 802.11ac(VHT40 MIMO) Channel No.:159

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
32.667500	32.63	-20.8	53.43	Vertical	40.00
84.174500	27.76	-23.3	51.06	Vertical	40.00
150.280000	23.25	-22.5	45.75	Vertical	43.50
215.997500	28.04	-18.2	46.24	Vertical	43.50
359.994000	29.35	-13.8	43.15	Vertical	46.00
959.987500	30.11	-2.8	32.91	Vertical	46.00

For 802.11ac(VHT80 MIMO) Channel No.:155


Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
32.716000	32.87	-20.8	53.67	Vertical	40.00
75.105000	25.71	-23.4	49.11	Vertical	40.00
150.280000	23.26	-22.5	45.76	Vertical	43.50
215.997500	28.02	-18.2	46.22	Vertical	43.50
359.994000	29.35	-13.8	43.15	Vertical	46.00
959.987500	30.11	-2.8	32.91	Vertical	46.00

Carrier frequency (MHz): 5180
Channel No.:36

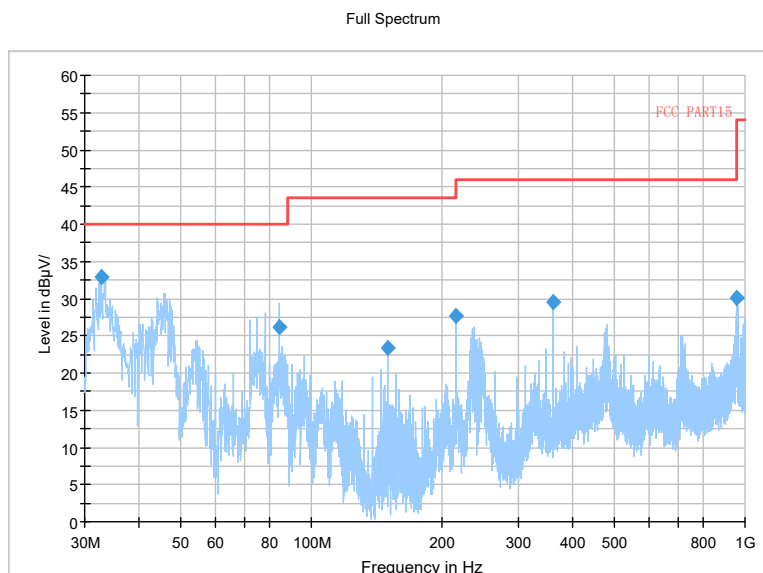


Frequency Range: 30MHz -1GHz
Detector: QP mode
Test Mode: 802.11a(Chain1)

Full Spectrum

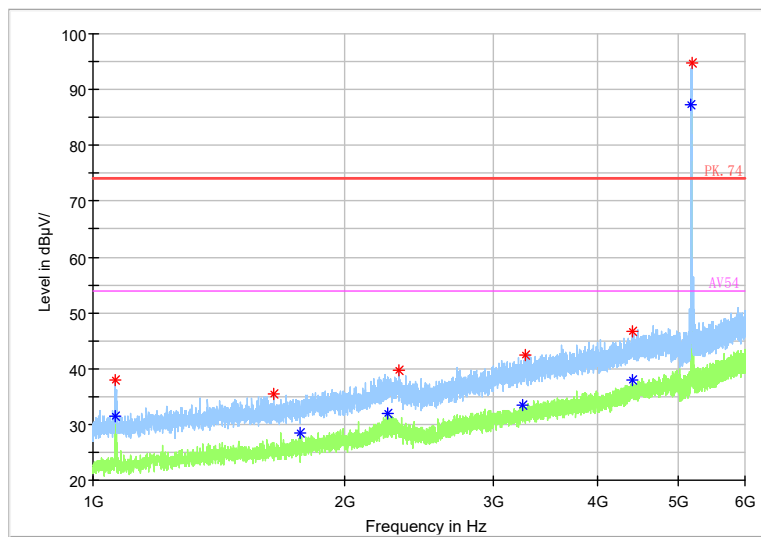


Frequency Range: 1GHz -6GHz
Detector: Av mode and PK mode
Modulation type: 802.11a(Chain1)

Full Spectrum

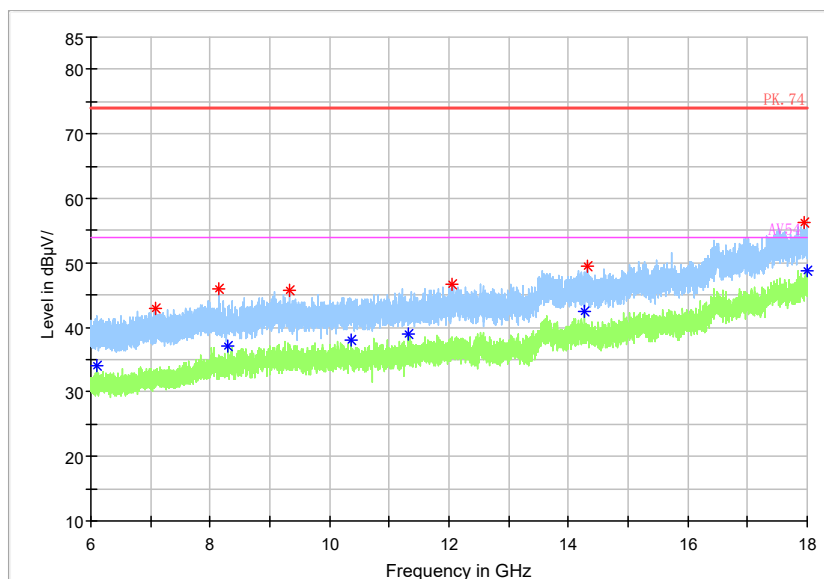


Frequency Range: 6GHz -18GHz
Detector: Av mode and PK mode
Modulation type: 802.11a(Chain1)

Full Spectrum

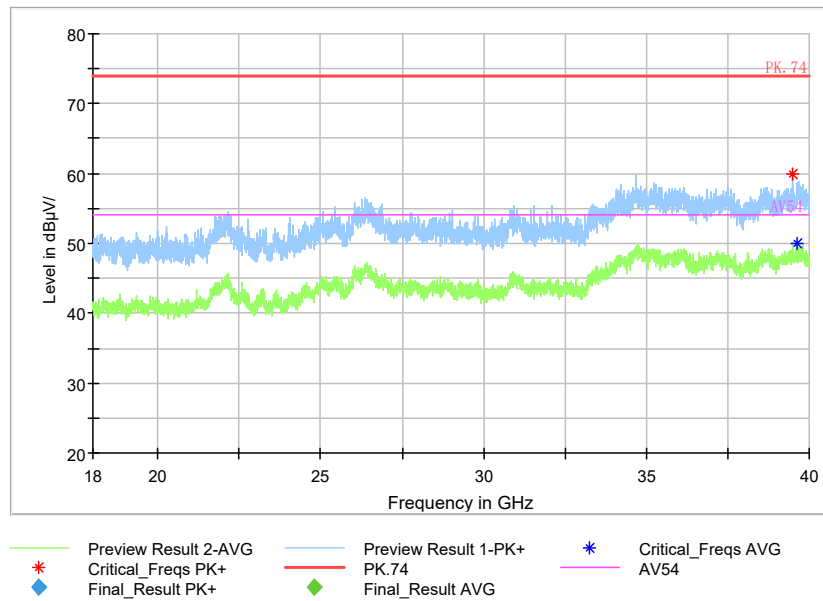


Frequency Range: 18GHz -40GHz
Detector: Av mode and PK mode
Modulation type: 802.11a(Chain1)

Full Spectrum

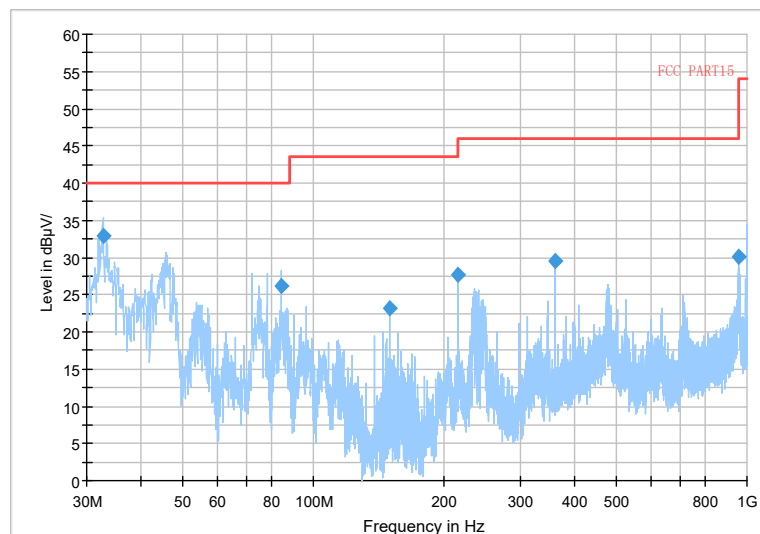


Frequency Range: 30MHz -1GHz
Detector: QP mode
Modulation type: 802.11n(HT20 MIMO)

Full Spectrum

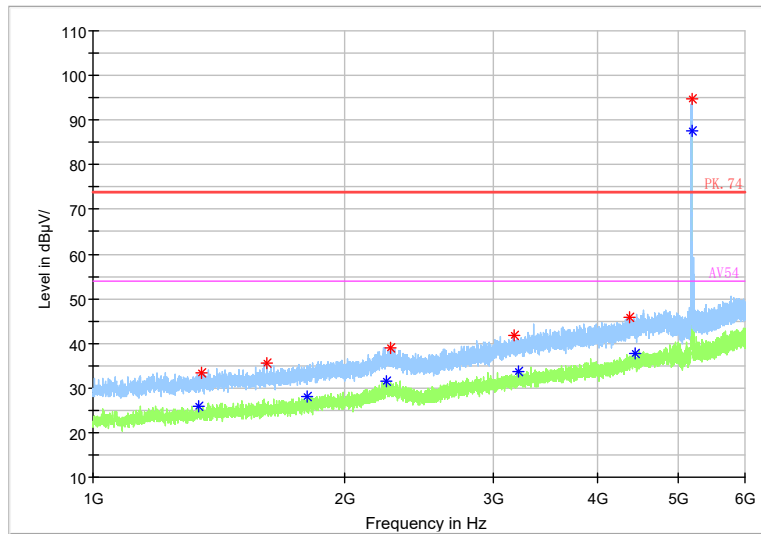

Frequency Range: 1GHz -6GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT20 MIMO)

Full Spectrum

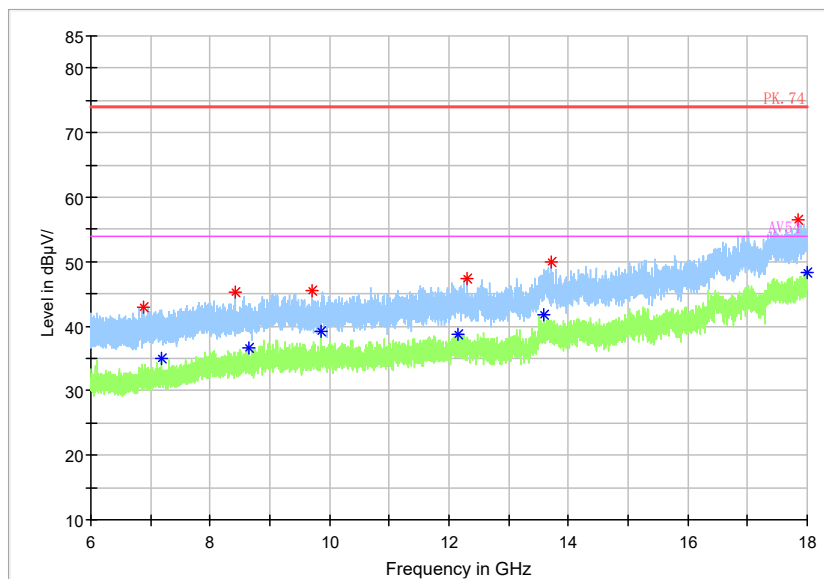


Frequency Range: 6GHz -18GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT20 MIMO)

Full Spectrum




Frequency Range: 18GHz -40GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT20 MIMO)

Full Spectrum

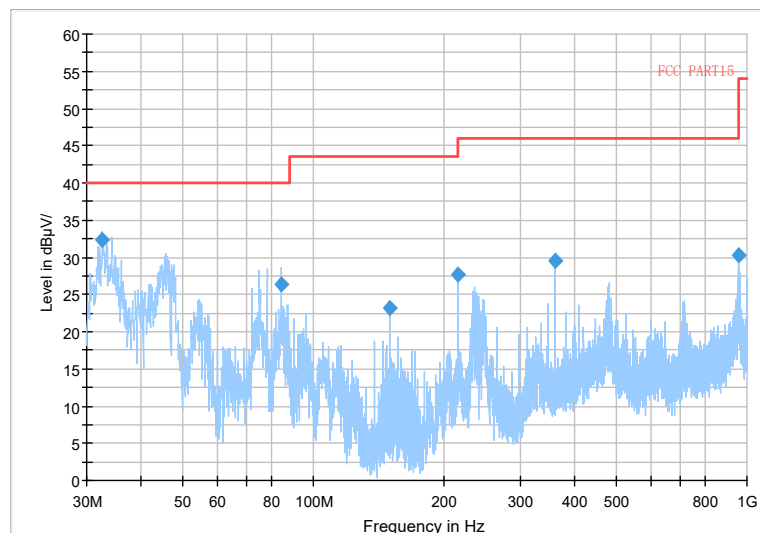


Frequency Range: 30MHz -1GHz
Detector: QP mode
Modulation type: 802.11ac(VHT20 MIMO)

Full Spectrum

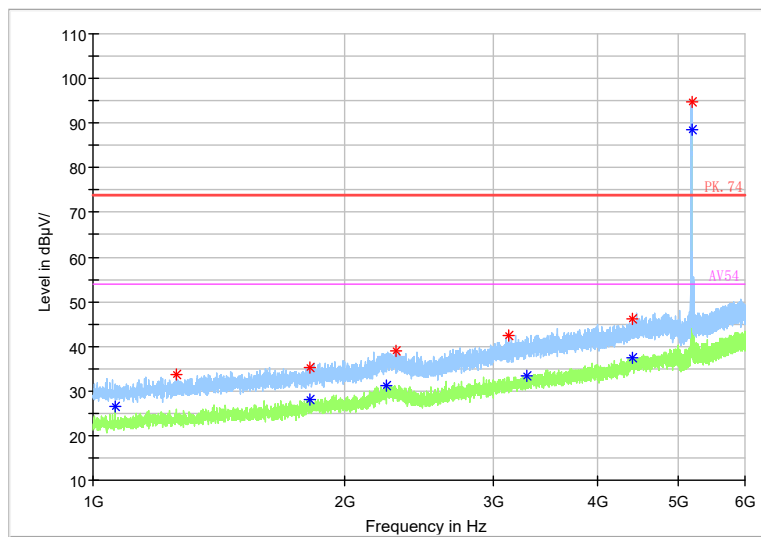


Frequency Range: 1GHz -6GHz
Detector: Av mode and PK mode
Modulation type: 802.11ac(VHT20 MIMO)

Full Spectrum

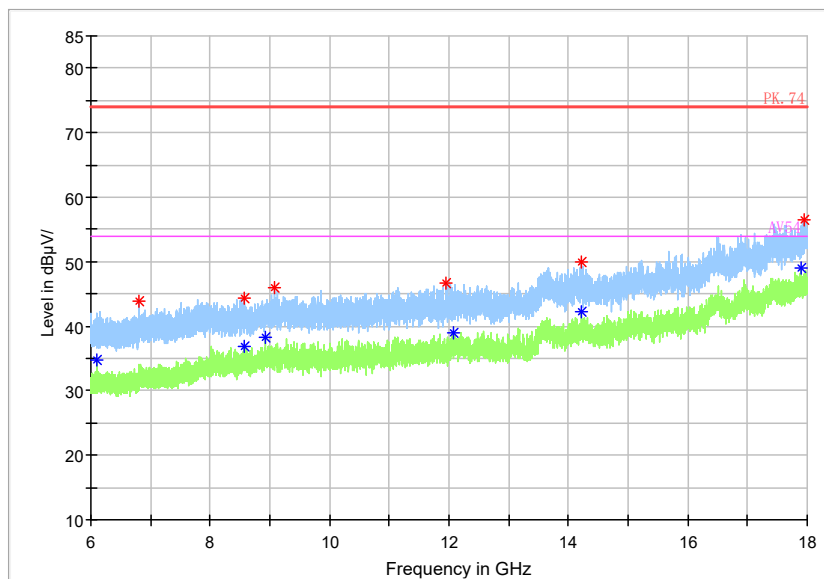


Frequency Range: 6GHz -18GHz
Detector: Av mode and PK mode
Modulation type: 802.11ac(VHT20 MIMO)

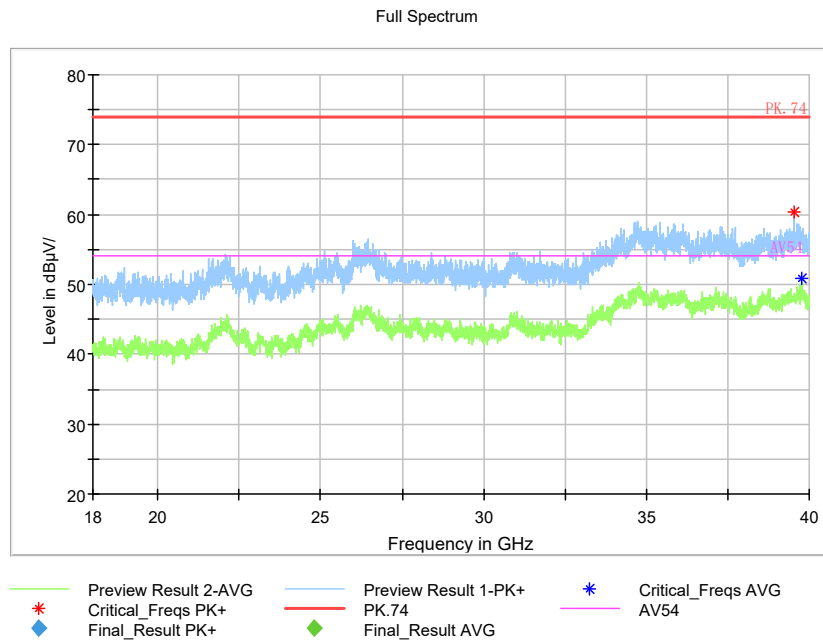


Frequency Range: 18GHz -40GHz
Detector: Av mode and PK mode
Modulation type: 802.11ac(VHT20 MIMO)


Carrier frequency (MHz): 5200
Channel No.:40

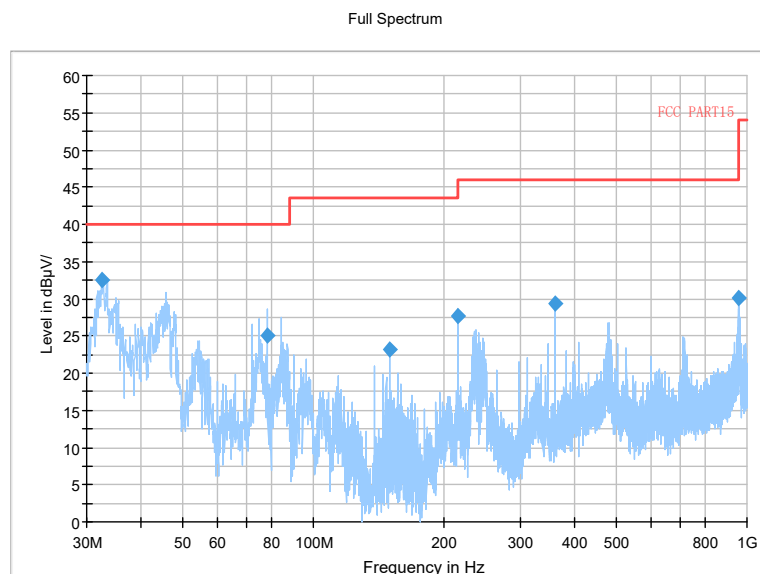

Frequency Range: 30MHz -1GHz
Detector: QP mode
Test Mode: 802.11a(Chain1)

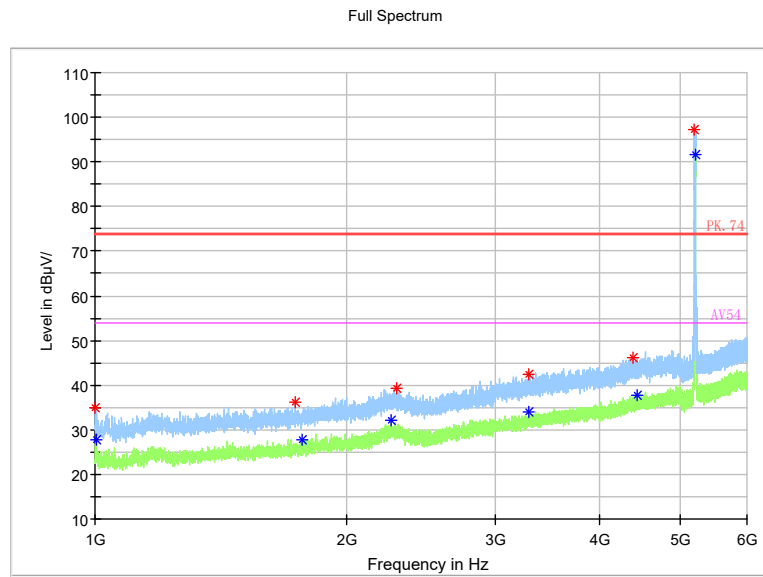

Frequency Range: 1GHz -6GHz
Detector: Av mode and PK mode
Modulation type: 802.11a(Chain1)

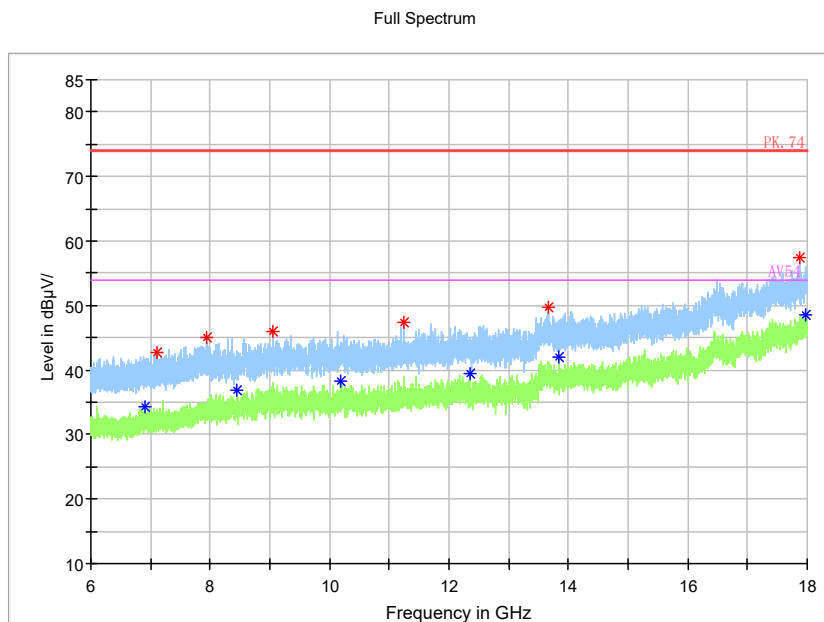


Frequency Range: 6GHz -18GHz
Detector: Av mode and PK mode
Modulation type: 802.11a(Chain1)

Full Spectrum




Frequency Range: 18GHz -40GHz
Detector: Av mode and PK mode
Modulation type: 802.11a(Chain1)

Full Spectrum

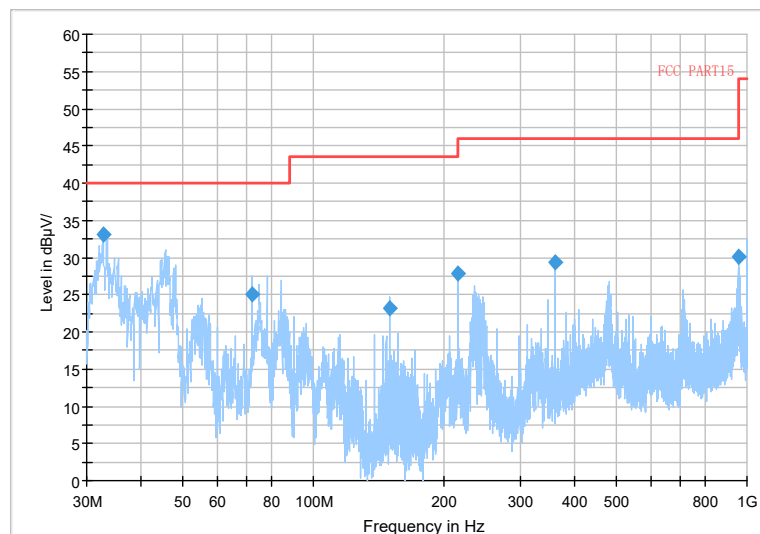


Frequency Range: 30MHz -1GHz
Detector: QP mode
Modulation type: 802.11n(HT20 MIMO)

Full Spectrum

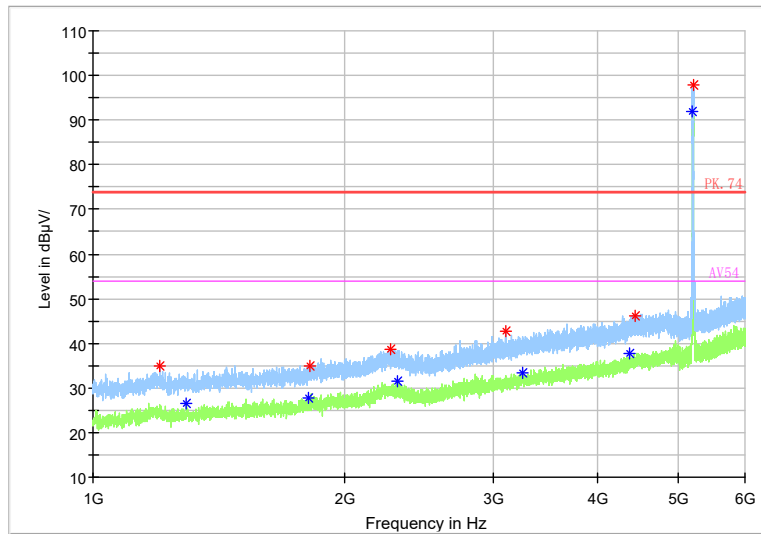

Frequency Range: 1GHz -6GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT20 MIMO)

Full Spectrum

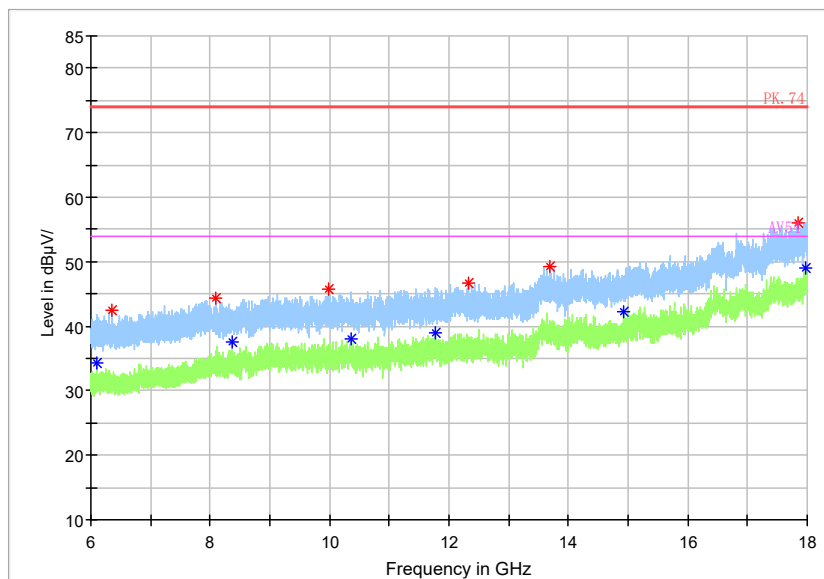


Frequency Range: 6GHz -18GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT20 MIMO)

Full Spectrum




Frequency Range: 18GHz -40GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT20 MIMO)

Full Spectrum

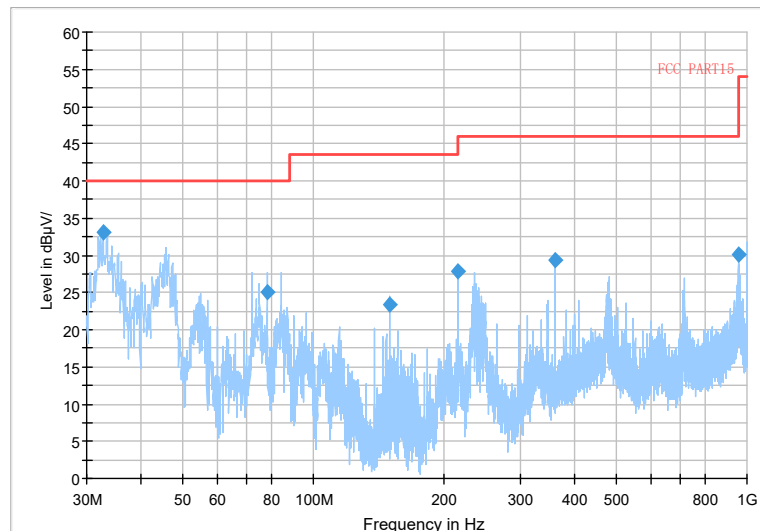


Frequency Range: 30MHz -1GHz
Detector: QP mode
Modulation type: 802.11ac(VHT20 MIMO)

Full Spectrum

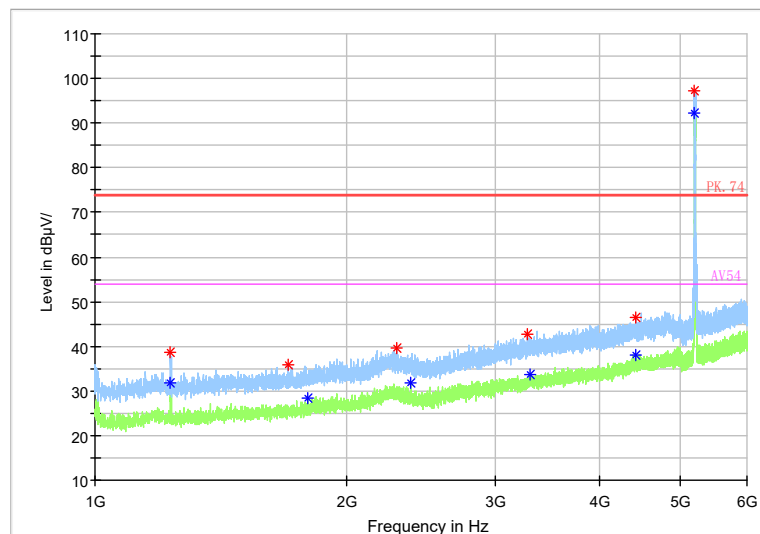

Frequency Range: 1GHz -6GHz
Detector: Av mode and PK mode
Modulation type: 802.11ac(VHT20 MIMO)

Full Spectrum

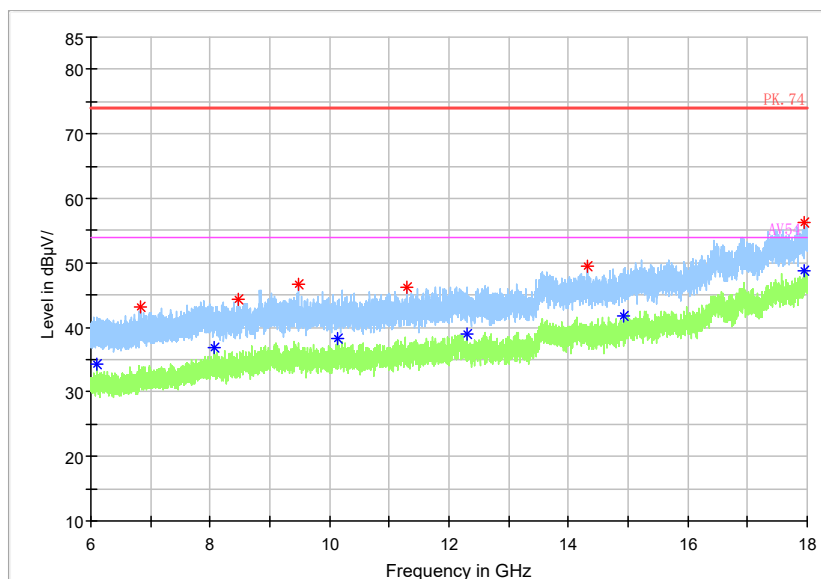


Frequency Range: 6GHz -18GHz
Detector: Av mode and PK mode
Modulation type: 802.11ac(VHT20 MIMO)

Full Spectrum




Frequency Range: 18GHz -40GHz
Detector: Av mode and PK mode
Modulation type: 802.11ac(VHT20 MIMO)

Carrier frequency (MHz): 5240
Channel No.:48

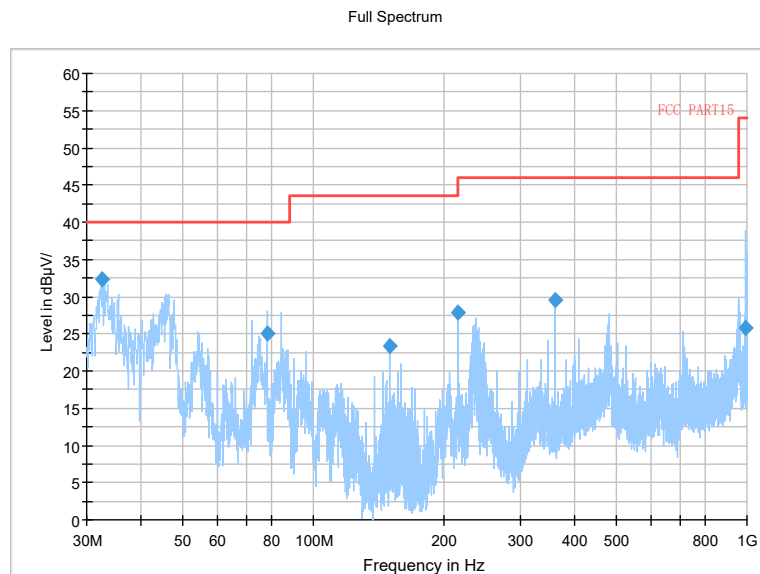


Frequency Range: 30MHz -1GHz
Detector: QP mode
Test Mode: 802.11a(Chain1)

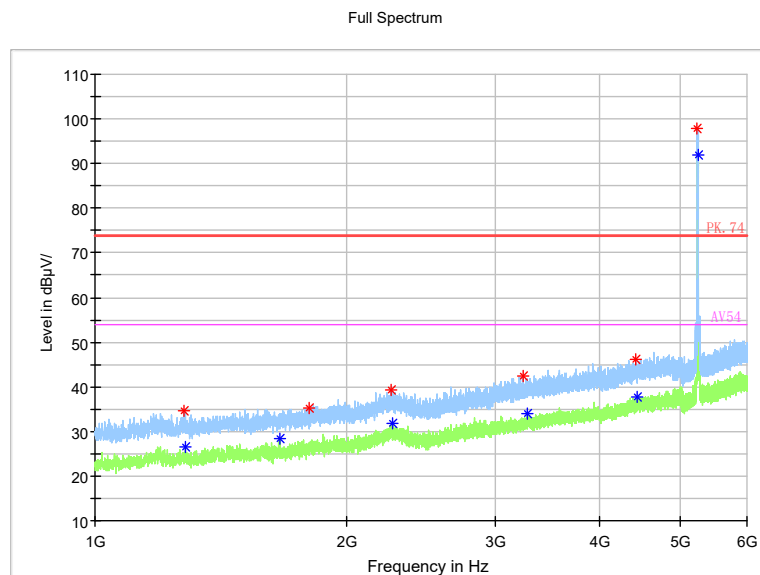

Frequency Range: 1GHz -6GHz
Detector: Av mode and PK mode
Modulation type: 802.11a(Chain1)

Full Spectrum

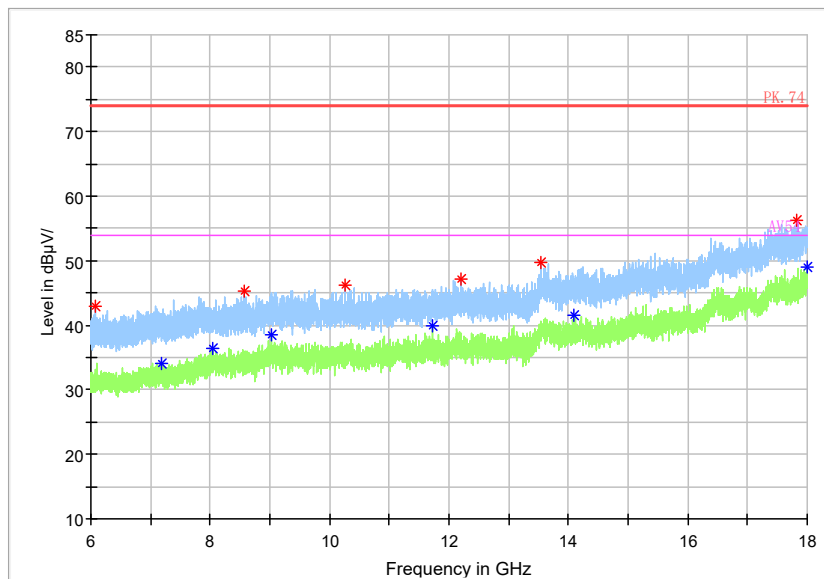


Frequency Range: 6GHz -18GHz
Detector: Av mode and PK mode
Modulation type: 802.11a(Chain1)

Full Spectrum




Frequency Range: 18GHz -40GHz
Detector: Av mode and PK mode
Modulation type: 802.11a(Chain1)

Full Spectrum

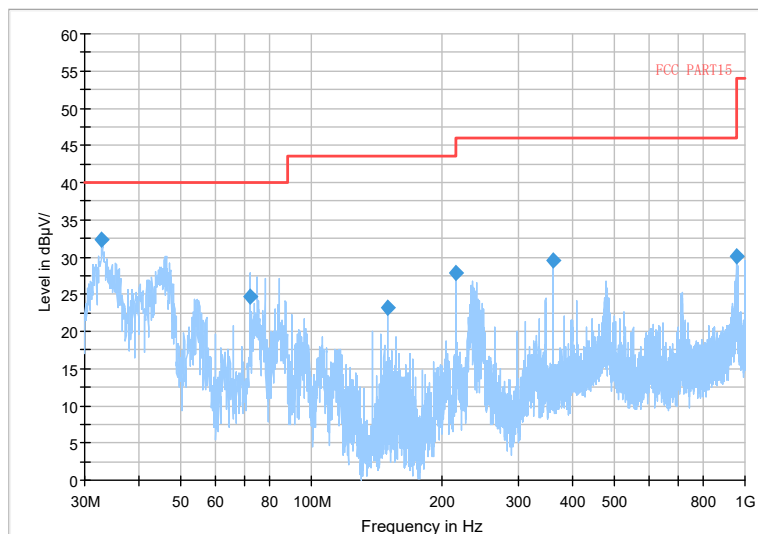


Frequency Range: 30MHz -1GHz
Detector: QP mode
Modulation type: 802.11n(HT20 MIMO)

Full Spectrum

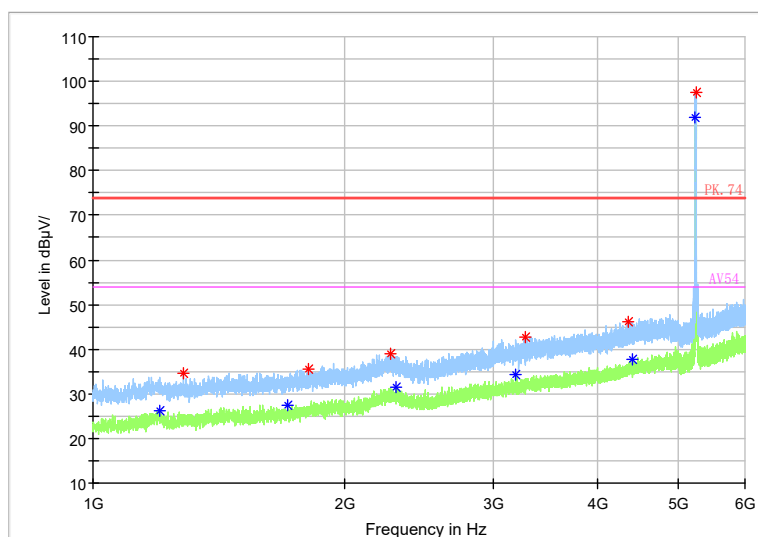


Frequency Range: 1GHz -6GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT20 MIMO)

Full Spectrum

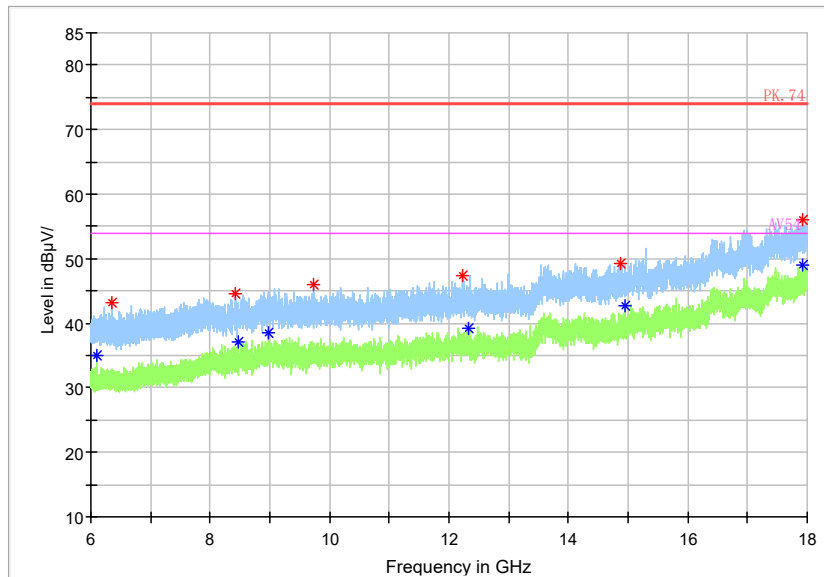

Frequency Range: 6GHz -18GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT20 MIMO)


Full Spectrum

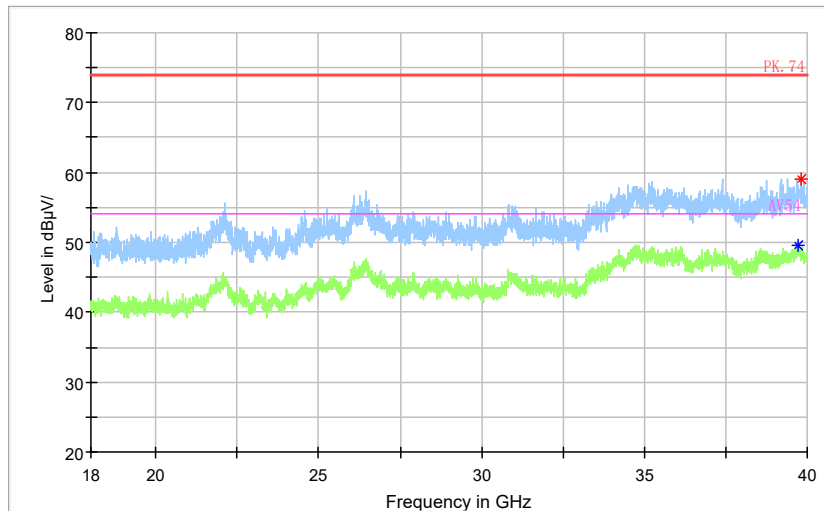

— Preview Result 2-AVG — Preview Result 1-PK+ * Critical_Freqs AVG
* Critical_Freqs PK+ — PK.74 — AV54
◆ Final_Result PK+ ◆ Final_Result AVG


Frequency Range: 18GHz -40GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT20 MIMO)

Full Spectrum

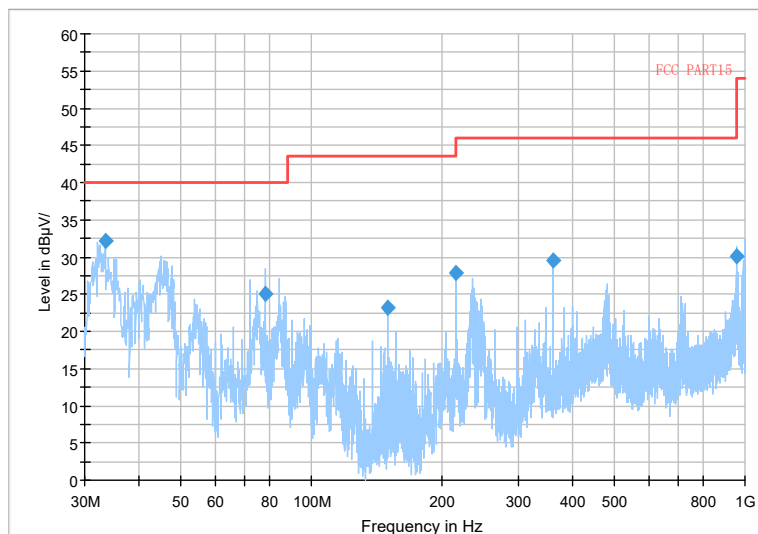


Frequency Range: 30MHz -1GHz
Detector: QP mode
Modulation type: 802.11ac(VHT20 MIMO)

Full Spectrum

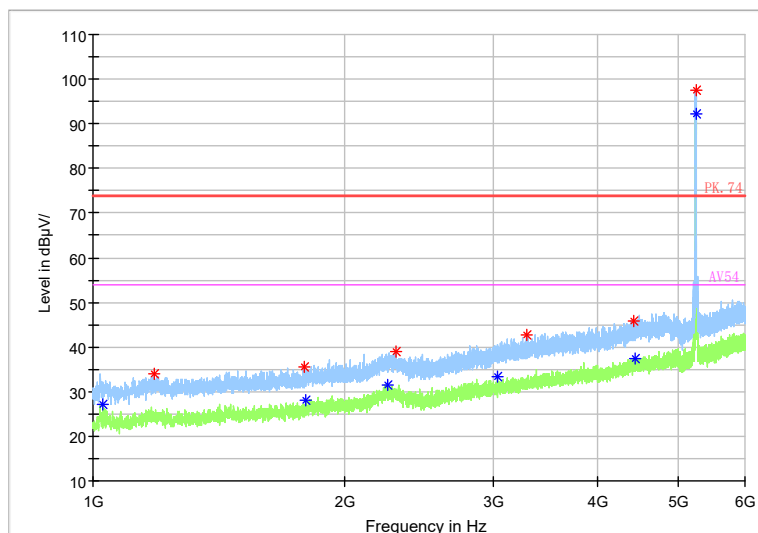


Frequency Range: 1GHz -6GHz
Detector: Av mode and PK mode
Modulation type: 802.11ac(VHT20 MIMO)

Full Spectrum

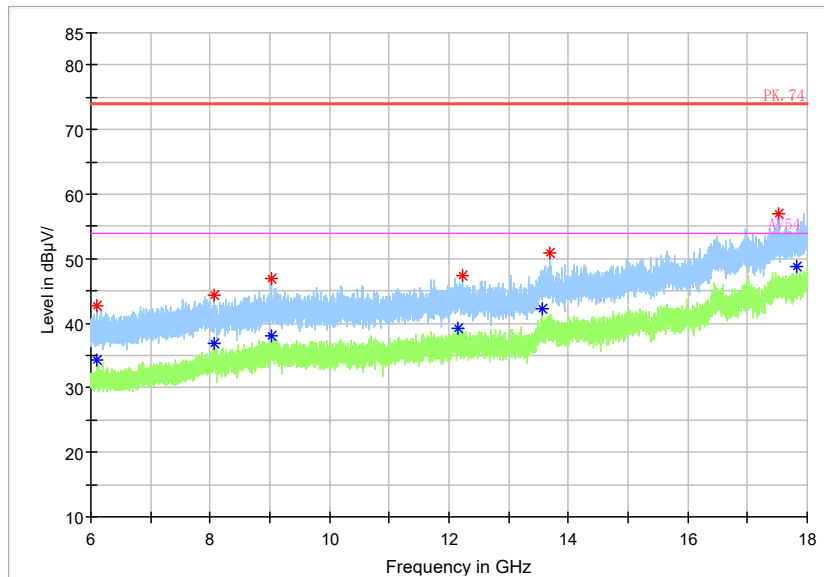

Frequency Range: 6GHz -18GHz
Detector: Av mode and PK mode
Modulation type: 802.11ac(VHT20 MIMO)


Full Spectrum

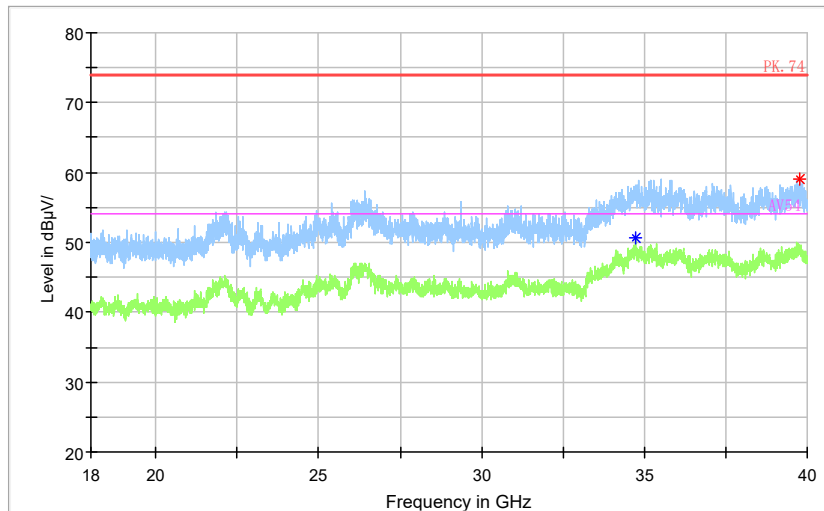


Preview Result 2-AVG Critical_Freqs PK+ Final_Result PK+ Preview Result 1-PK+ PK.74 Final_Result AVG Critical_Freqs AVG AV54

Frequency Range: 18GHz -40GHz
Detector: Av mode and PK mode
Modulation type: 802.11ac(VHT20 MIMO)

Carrier frequency (MHz): 5190
Channel No.:38

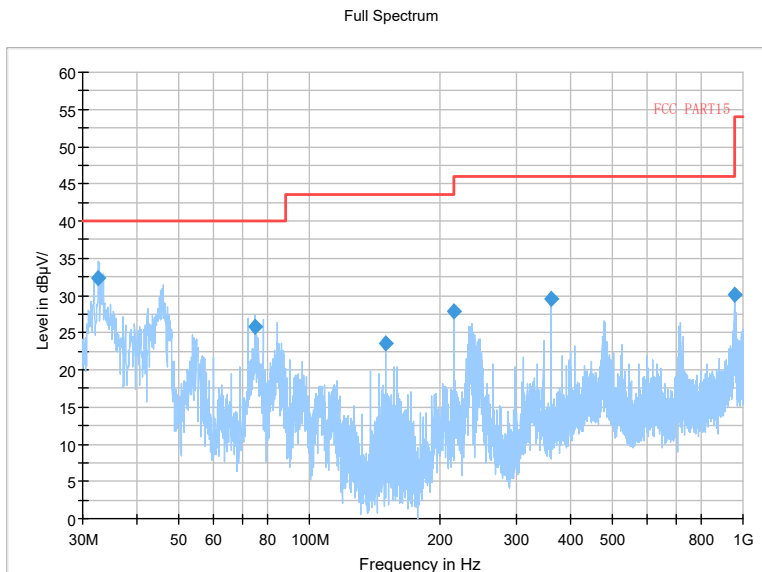


Frequency Range: 30MHz -1GHz
Detector: QP mode
Modulation type: 802.11n(HT40 MIMO)

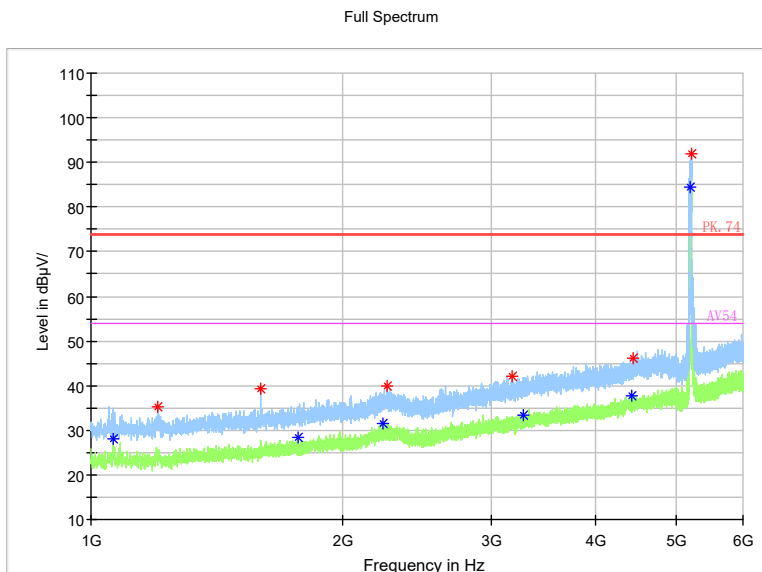


Frequency Range: 1GHz -6GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT40 MIMO)

Full Spectrum

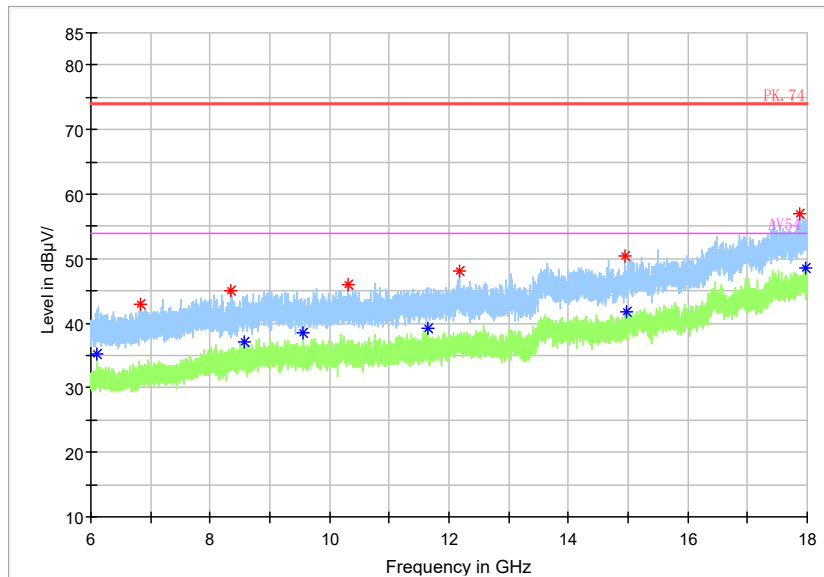

Frequency Range: 6GHz -18GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT40 MIMO)


Full Spectrum

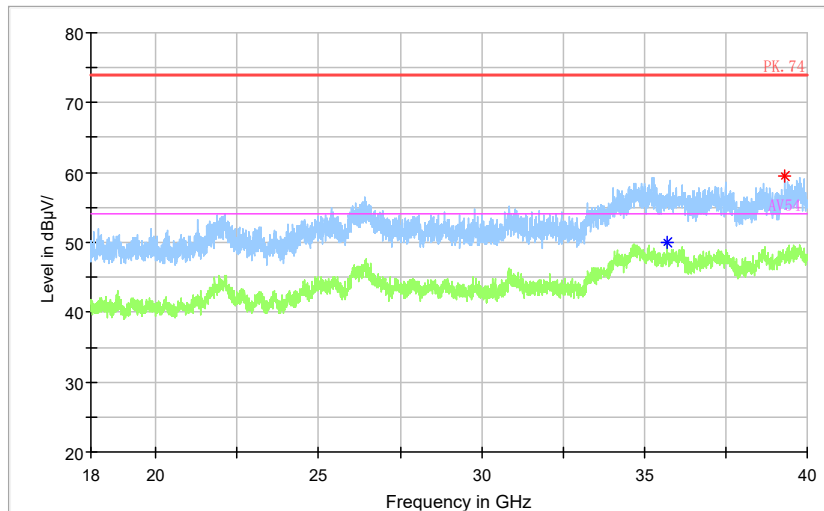

Preview Result 2-AVG Critical_Freqs PK+ Final_Result PK+ Preview Result 1-PK+ PK.74 Final_Result AVG Critical_Freqs AVG AV54


Frequency Range: 18GHz -40GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT40 MIMO)

Full Spectrum

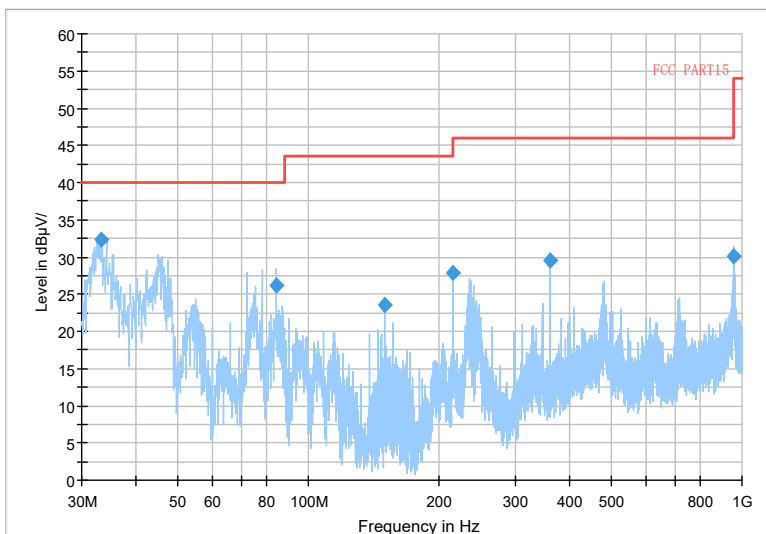


Frequency Range: 30MHz -1GHz
Detector: QP mode
Modulation type: 802.11ac(VHT40 MIMO)

Full Spectrum

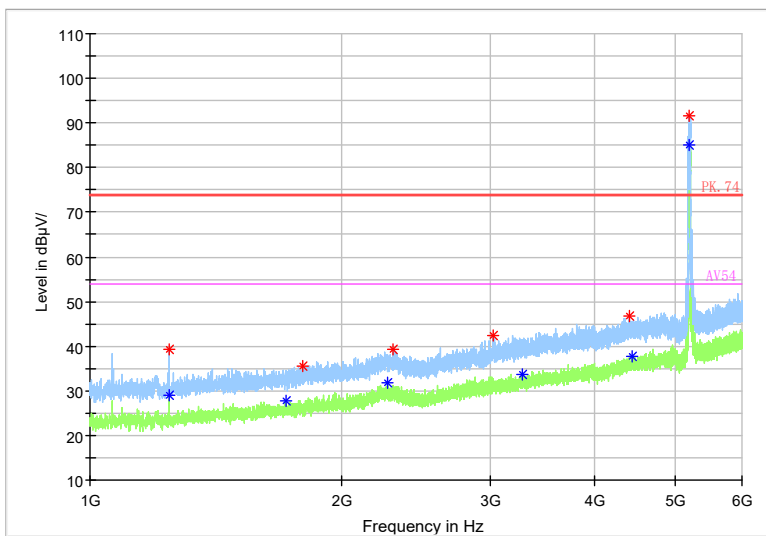


Frequency Range: 1GHz -6GHz
Detector: Av mode and PK mode
Modulation type: 802.11ac(VHT40 MIMO)

Full Spectrum

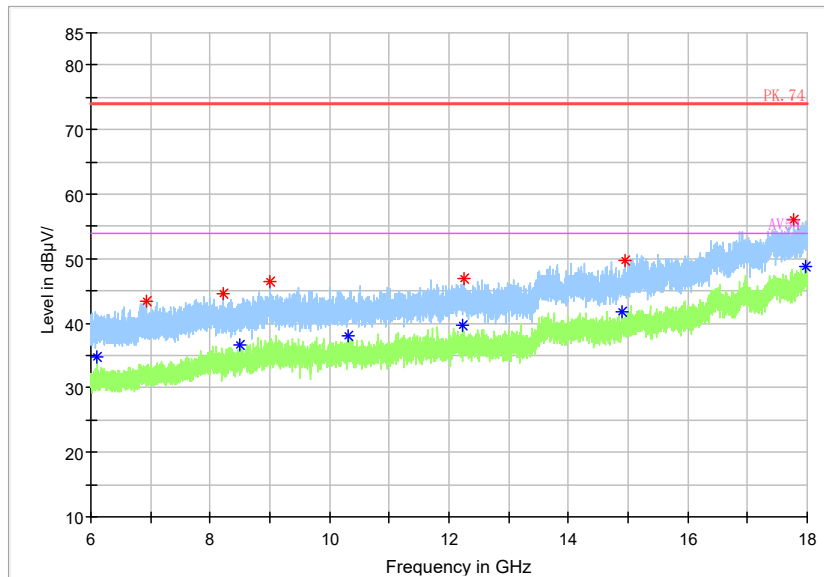

Frequency Range: 6GHz -18GHz
Detector: Av mode and PK mode
Modulation type: 802.11ac(VHT40 MIMO)

Full Spectrum

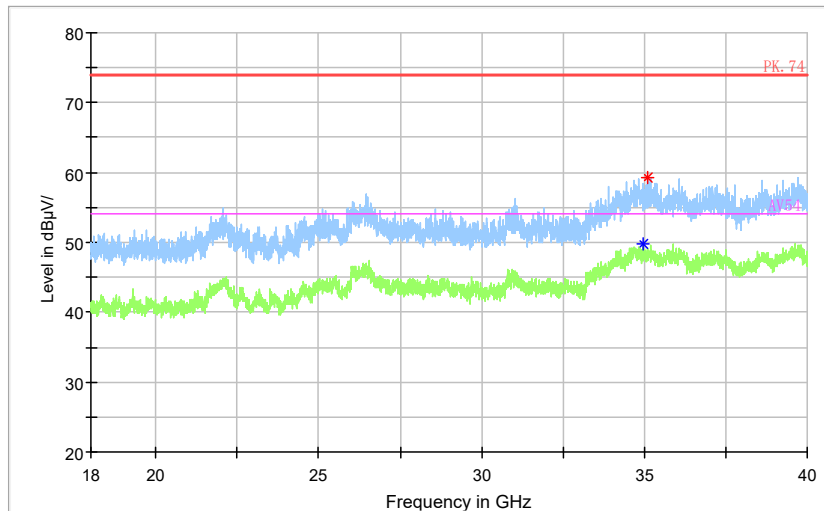


Preview Result 2-AVG Critical_Freqs PK+ Final_Result PK+
Preview Result 1-PK+ PK.74 Final_Result AVG
Critical_Freqs AVG AV54

Frequency Range: 18GHz -40GHz
Detector: Av mode and PK mode
Modulation type: 802.11ac(VHT40 MIMO)


Carrier frequency (MHz): 5230
Channel No.:46

Full Spectrum

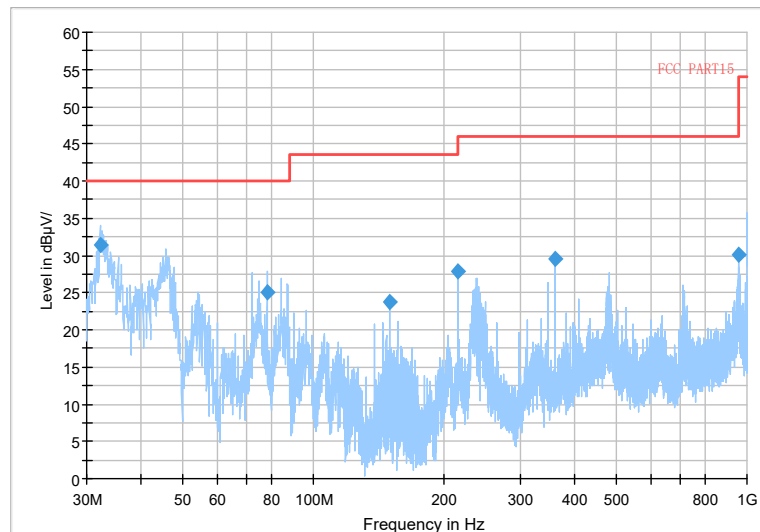


Frequency Range: 30MHz -1GHz
Detector: QP mode
Modulation type: 802.11n(HT40 MIMO)

Full Spectrum

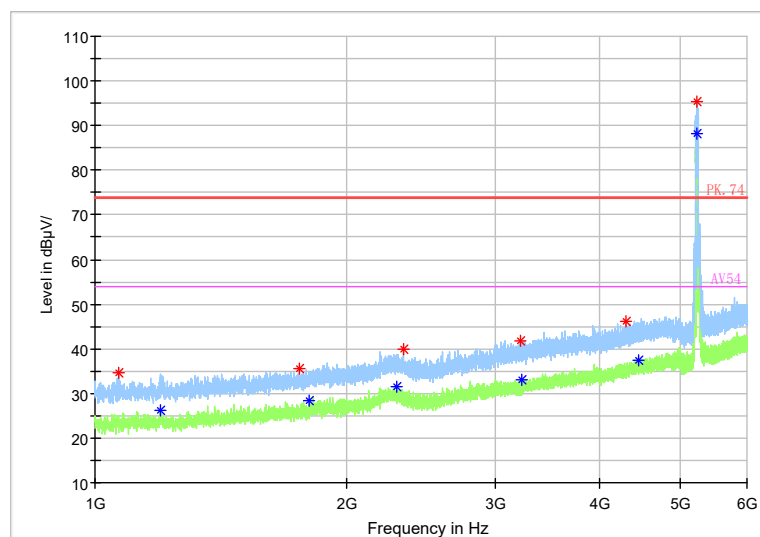


Frequency Range: 1GHz -6GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT40 MIMO)

Full Spectrum

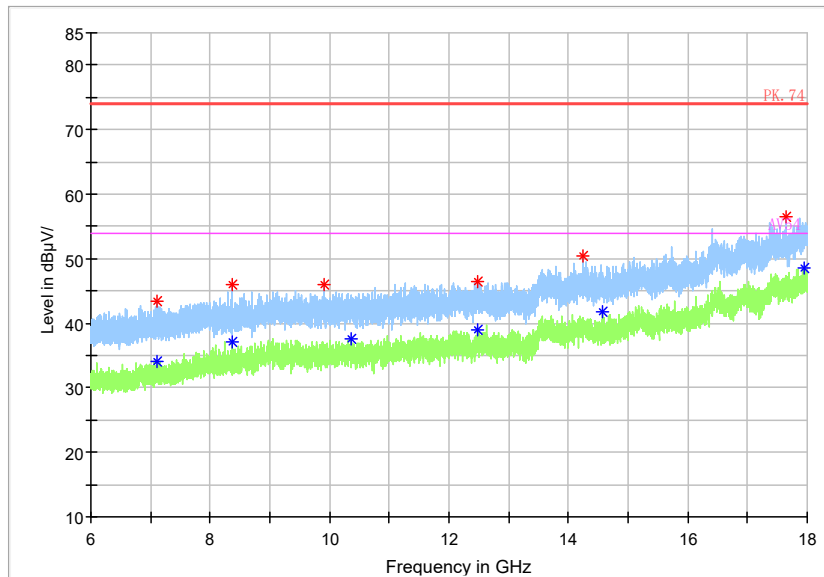


Frequency Range: 6GHz -18GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT40 MIMO)

Full Spectrum

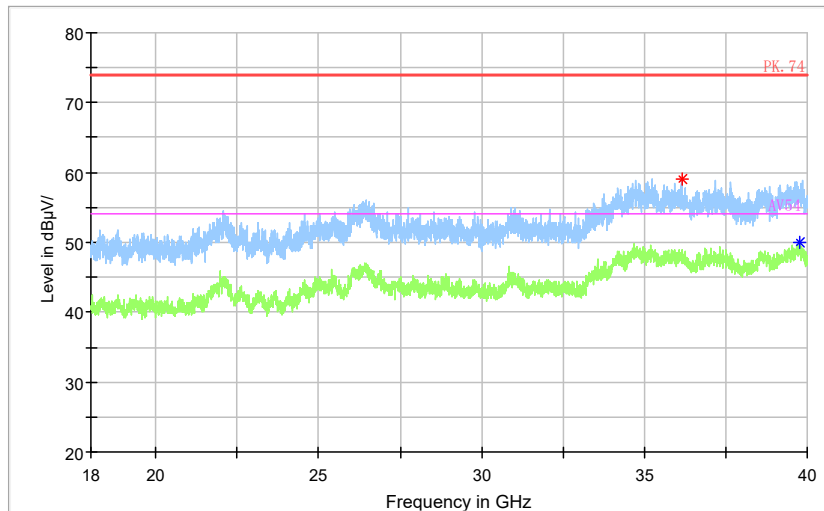


Preview Result 2-AVG Critical_Freqs PK+ Final_Result PK+
Preview Result 1-PK+ PK.74 Final_Result AVG
Critical_Freqs AVG AV54

Frequency Range: 18GHz -40GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT40 MIMO)

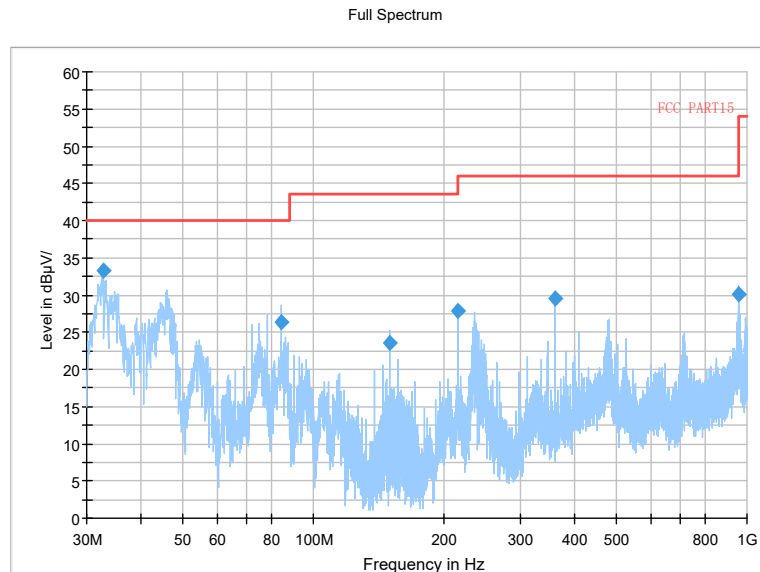


Frequency Range: 30MHz -1GHz
Detector: QP mode
Modulation type: 802.11ac(VHT40 MIMO)

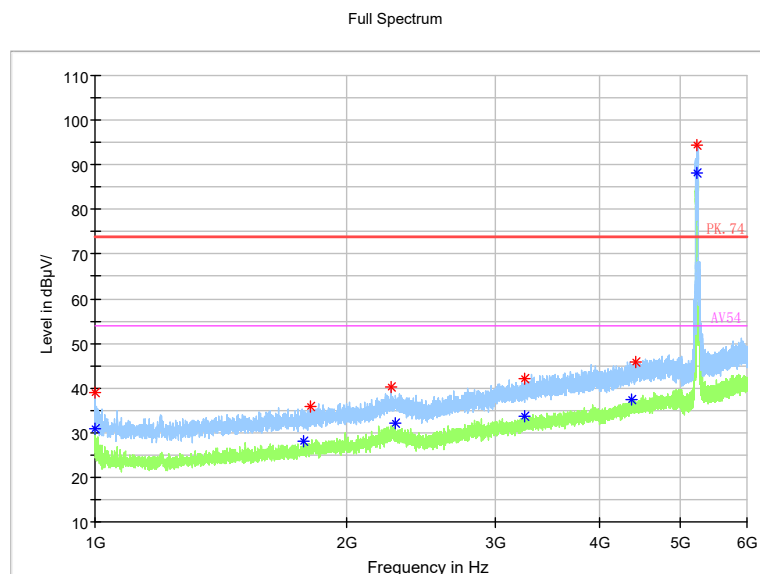


Frequency Range: 1GHz -6GHz
Detector: Av mode and PK mode
Modulation type: 802.11ac(VHT40 MIMO)

Full Spectrum

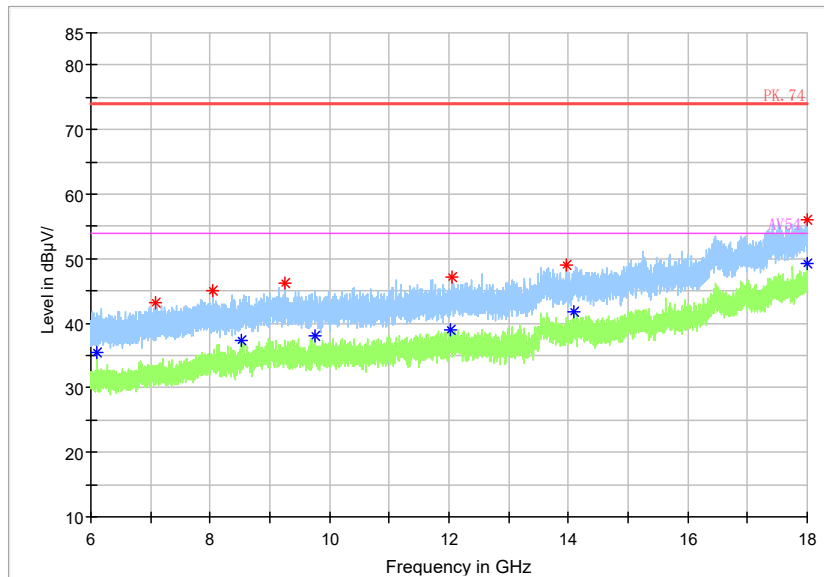

Frequency Range: 6GHz -18GHz
Detector: Av mode and PK mode
Modulation type: 802.11ac(VHT40 MIMO)


Full Spectrum

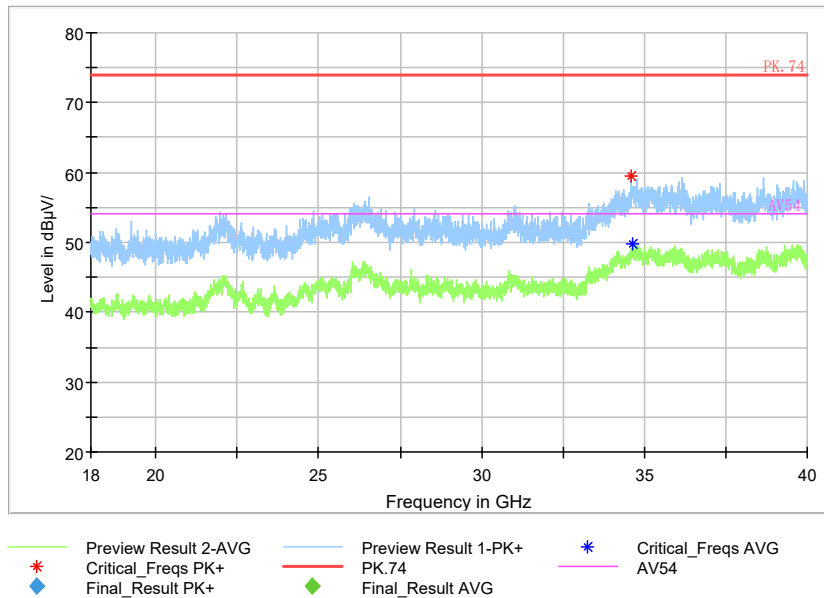

Frequency Range: 18GHz -40GHz
Detector: Av mode and PK mode
Modulation type: 802.11ac(VHT40 MIMO)


Carrier frequency (MHz): 5210
Channel No.:42

Full Spectrum

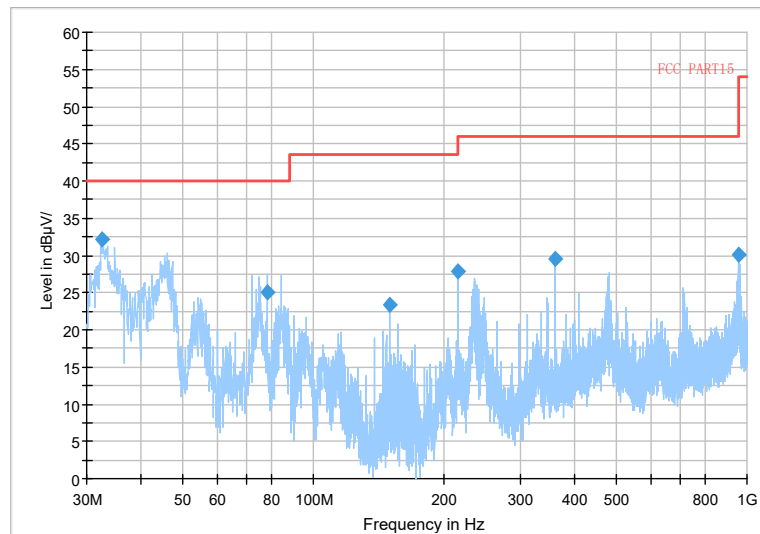


Frequency Range: 30MHz -1GHz
Detector: QP mode
Modulation type: 802.11ac(VHT80 MIMO)

Full Spectrum

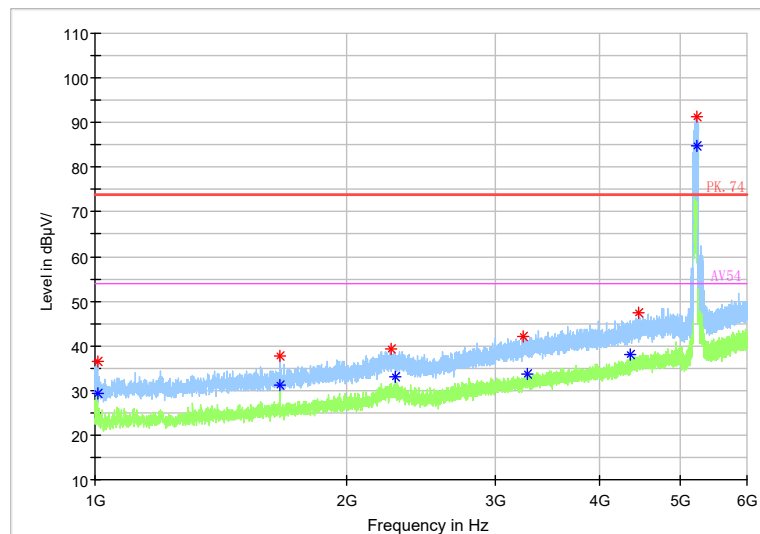


Frequency Range: 1GHz -6GHz
Detector: Av mode and PK mode
Modulation type: 802.11ac(VHT80 MIMO)

Full Spectrum

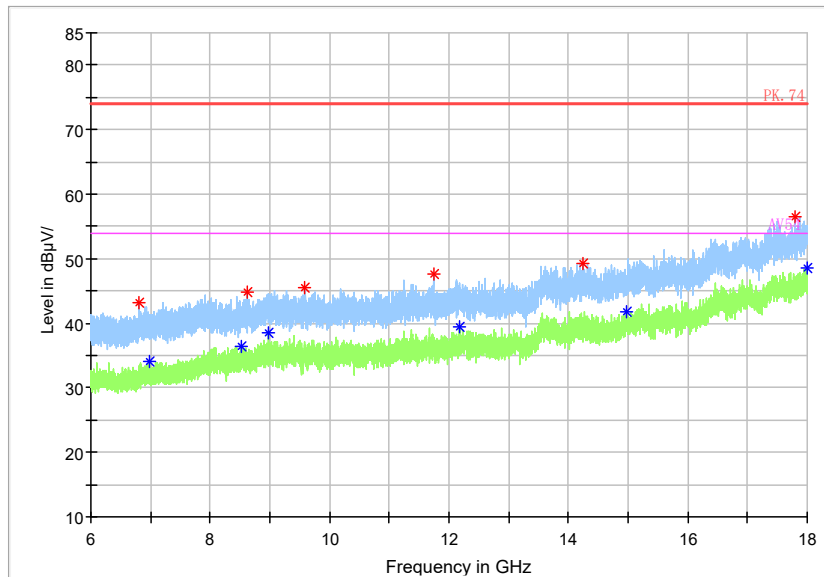

Frequency Range: 6GHz -18GHz
Detector: Av mode and PK mode
Modulation type: 802.11ac(VHT80 MIMO)

Full Spectrum

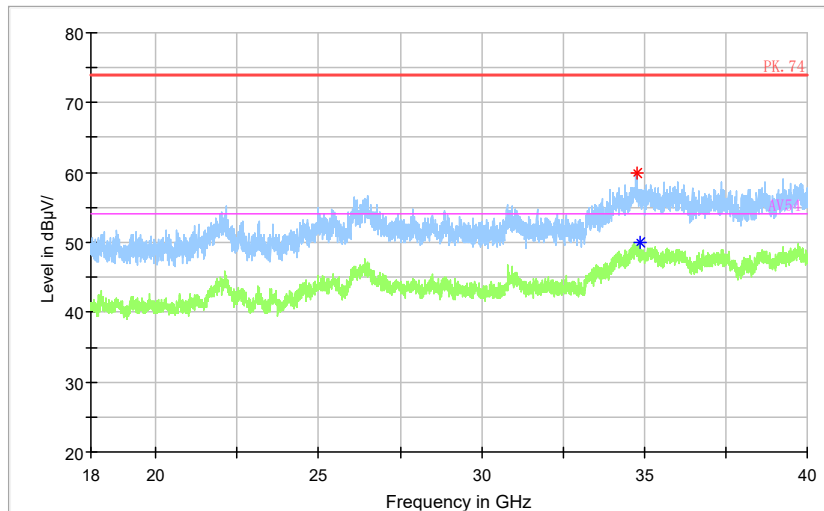

— Preview Result 2-AVG
* Critical_Freqs PK+
◆ Final_Result PK+
 — Preview Result 1-PK+
— PK.74
◆ Final_Result AVG
 * Critical_Freqs AVG
— AV54

Frequency Range: 18GHz -40GHz
Detector: Av mode and PK mode
Modulation type: 802.11ac(VHT80 MIMO)

Carrier frequency (MHz): 5260

The State Radio_monitoring_center Testing Center (SRTC)


Tel: 86-10-57996183

Fax: 86-10-57996388


Page number: 168 of 261

V3.0.0

Channel No.:52

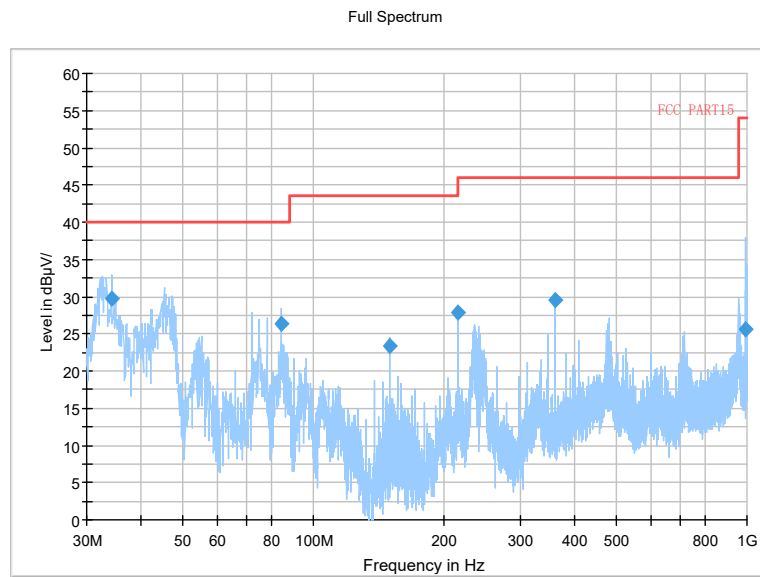


Frequency Range: 30MHz -1GHz
Detector: QP mode
Test Mode: 802.11a

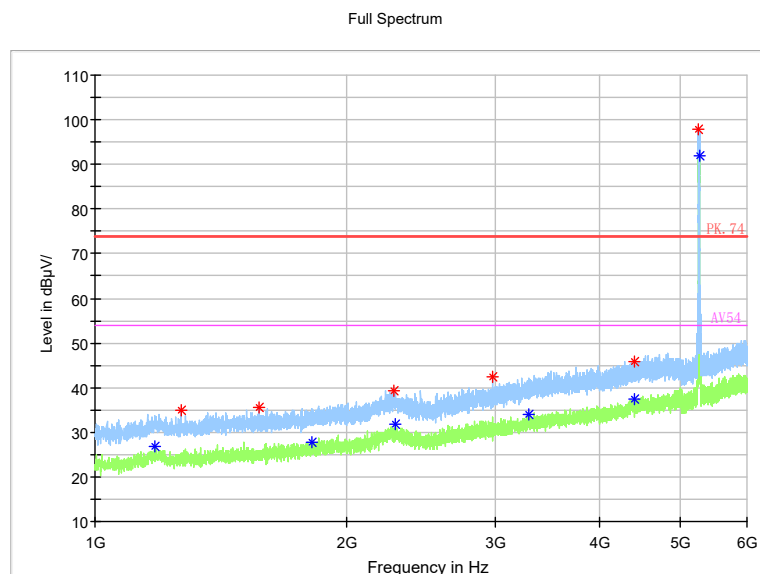

Frequency Range: 1GHz -6GHz
Detector: Av mode and PK mode
Modulation type: 802.11a

Full Spectrum

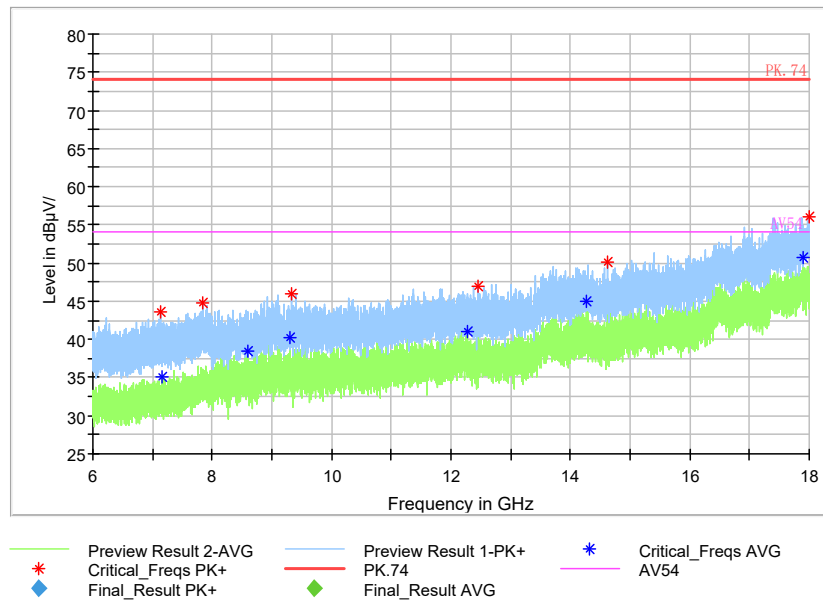


Frequency Range: 6GHz -18GHz
Detector: Av mode and PK mode
Modulation type: 802.11a

Full Spectrum




Frequency Range: 18GHz -40GHz
Detector: Av mode and PK mode
Modulation type: 802.11a

Full Spectrum

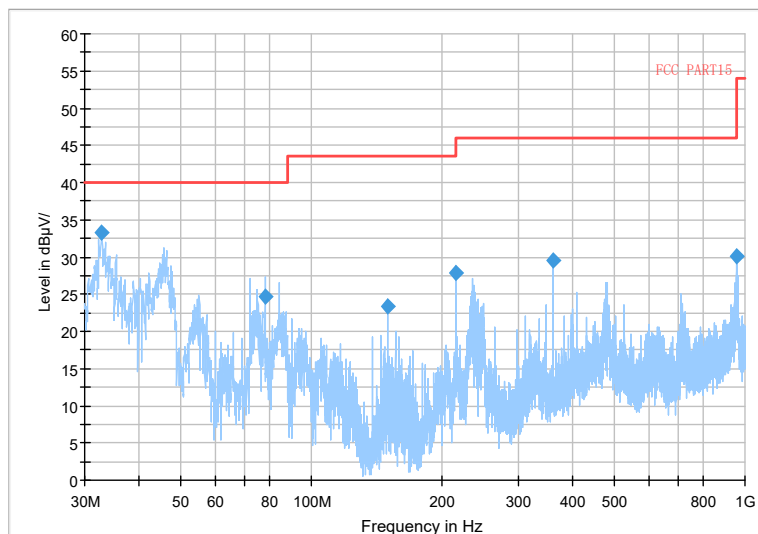


Frequency Range: 30MHz -1GHz
Detector: QP mode
Modulation type: 802.11n(HT20 MIMO)

Full Spectrum

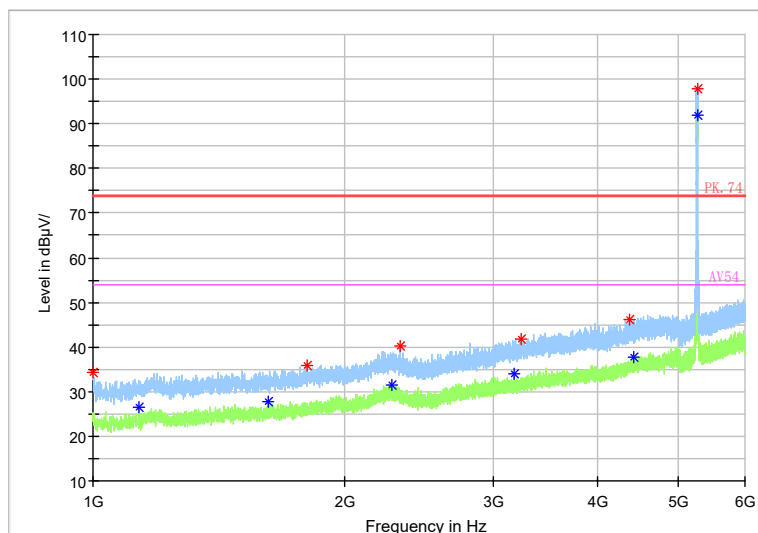


Frequency Range: 1GHz -6GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT20 MIMO)


Full Spectrum

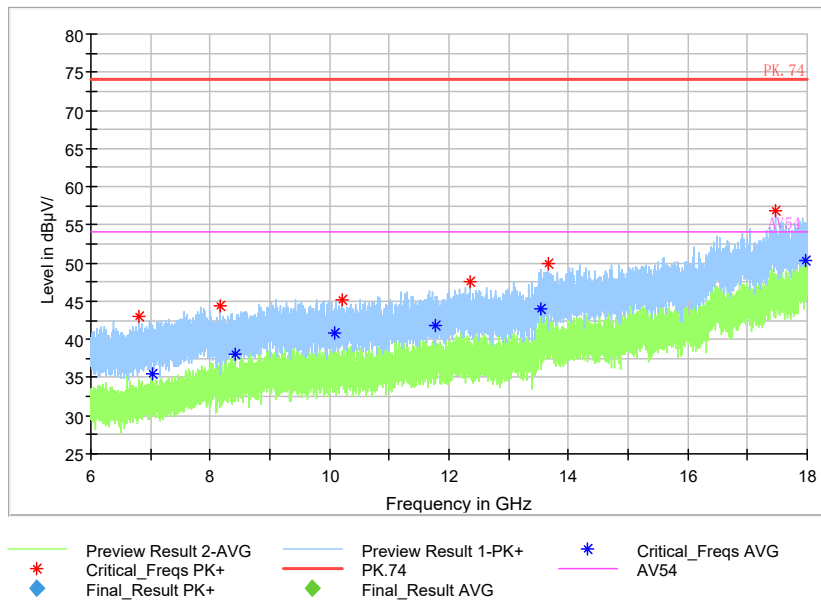

Full Spectrum

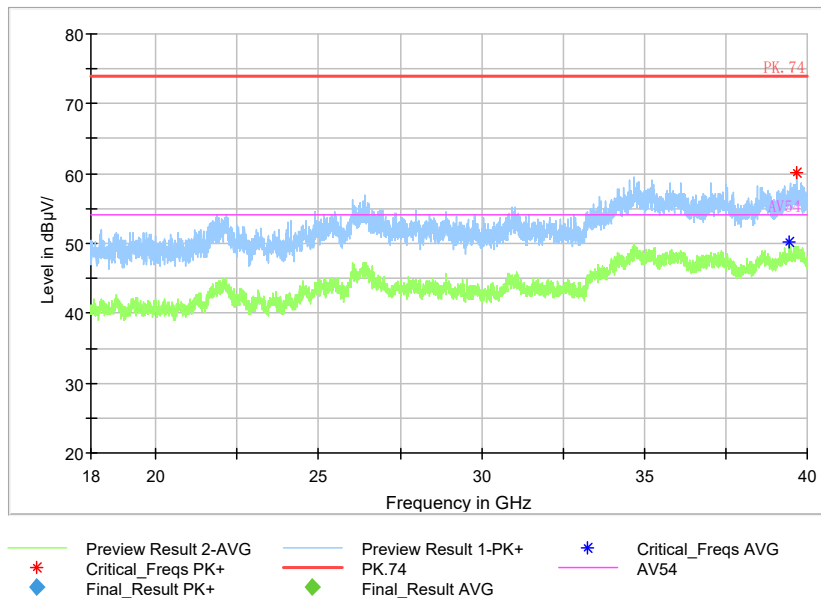


Full Spectrum

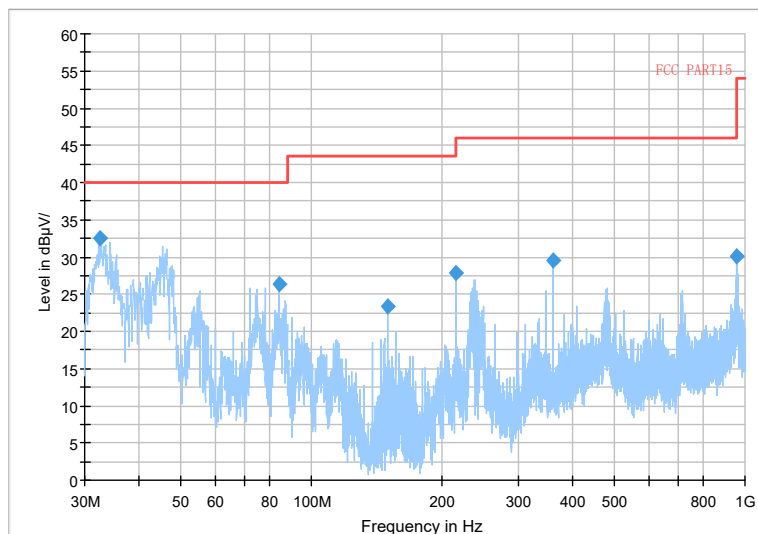


Frequency Range: 30MHz -1GHz
Detector: QP mode
Modulation type: 802.11ac(VHT20 MIMO)

Full Spectrum

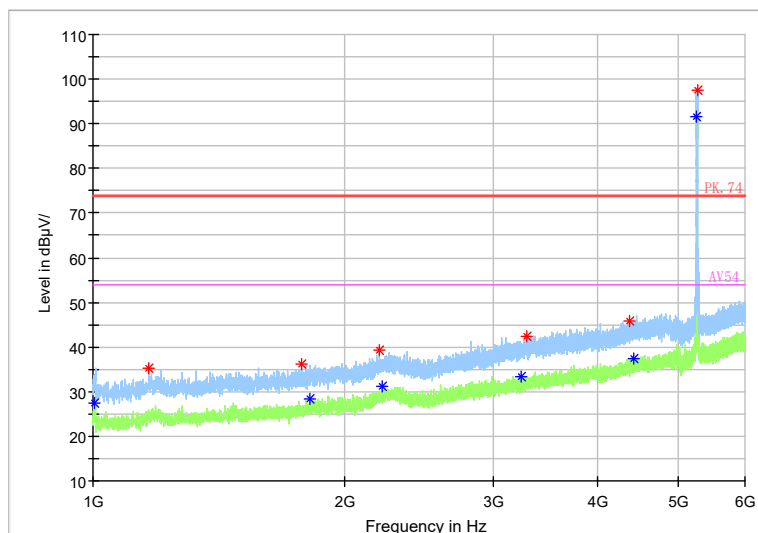


Frequency Range: 1GHz -6GHz
Detector: Av mode and PK mode
Modulation type: 802.11ac(VHT20 MIMO)


Full Spectrum

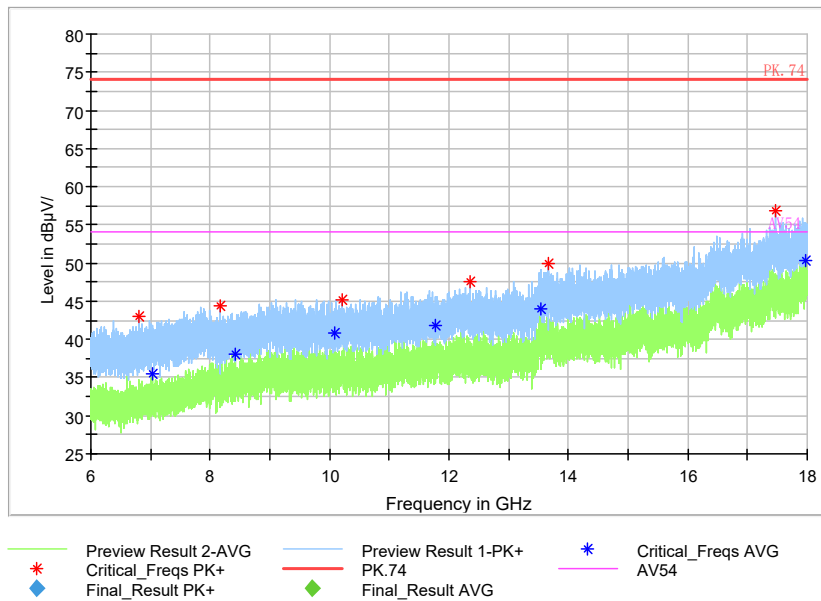


Full Spectrum

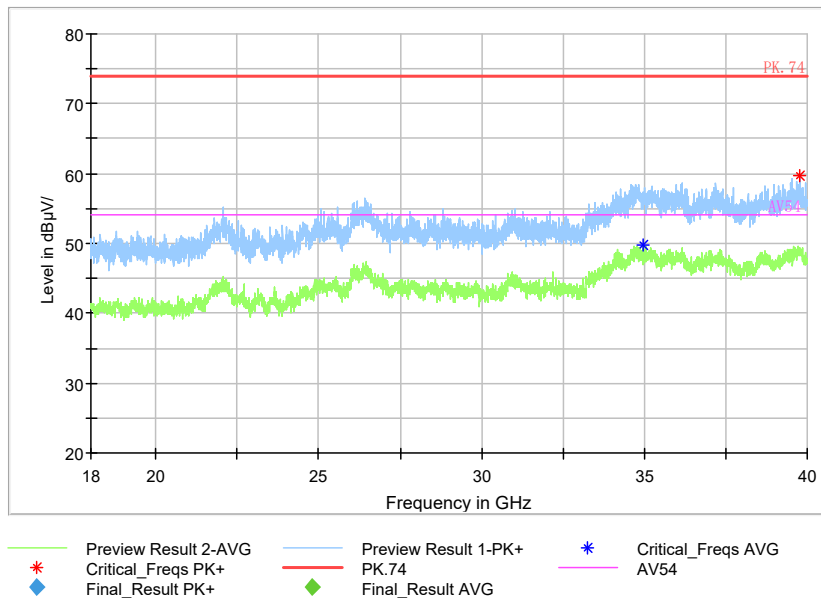

Carrier frequency (MHz): 5300
Channel No.:60

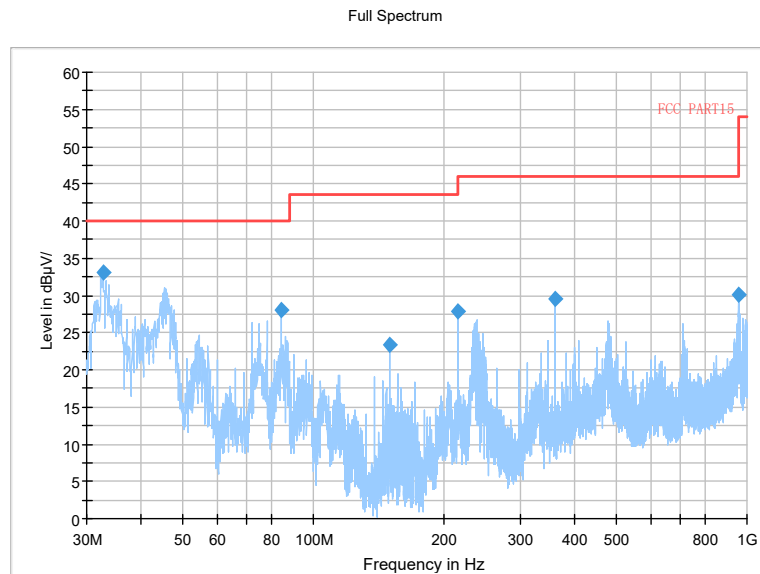


Frequency Range: 30MHz -1GHz
Detector: QP mode
Test Mode: 802.11a

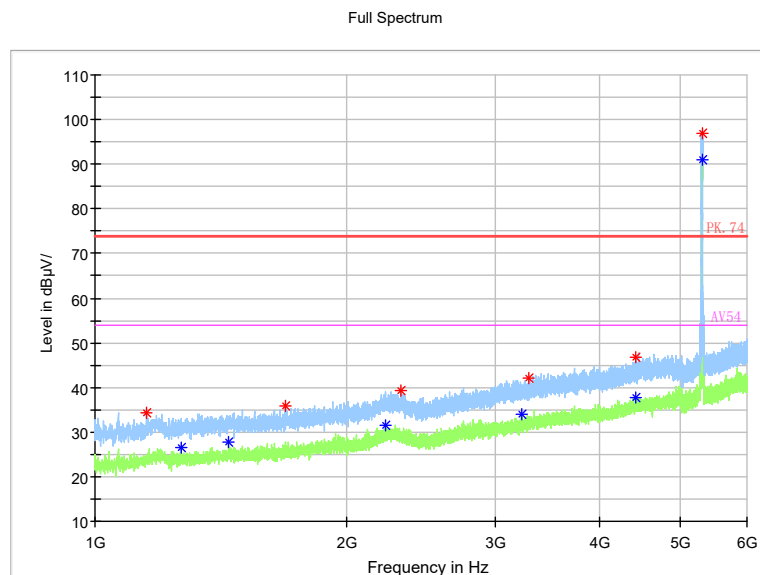

Frequency Range: 1GHz -6GHz
Detector: Av mode and PK mode
Modulation type: 802.11a

Full Spectrum

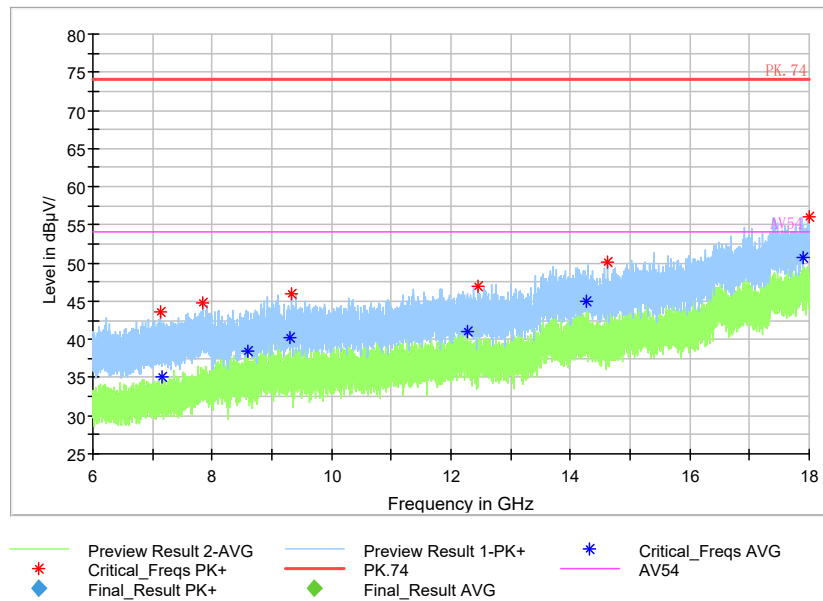


Frequency Range: 6GHz -18GHz
Detector: Av mode and PK mode
Modulation type: 802.11a

Full Spectrum




Frequency Range: 18GHz -40GHz
Detector: Av mode and PK mode
Modulation type: 802.11a

Full Spectrum

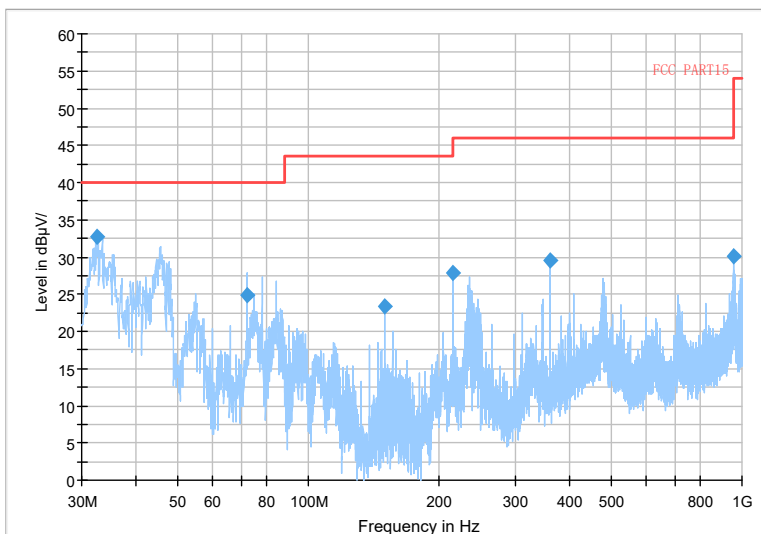


Frequency Range: 30MHz -1GHz
Detector: QP mode
Modulation type: 802.11n(HT20 MIMO)

Full Spectrum

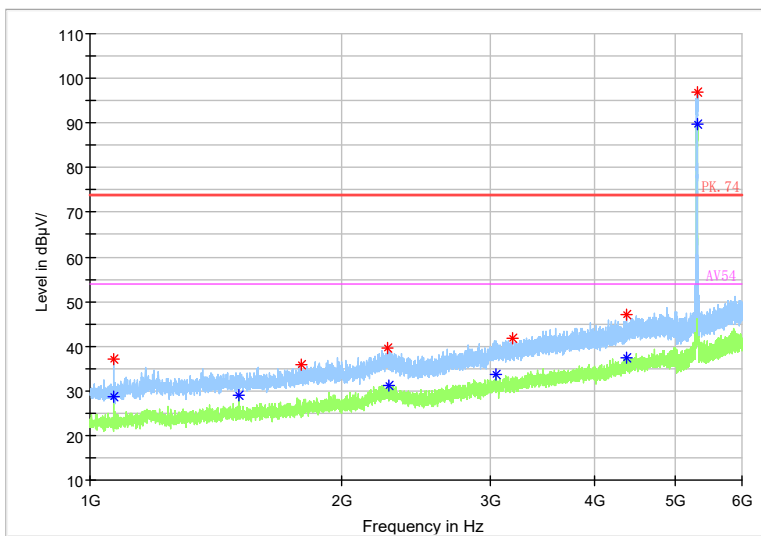


Frequency Range: 1GHz -6GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT20 MIMO)


Full Spectrum

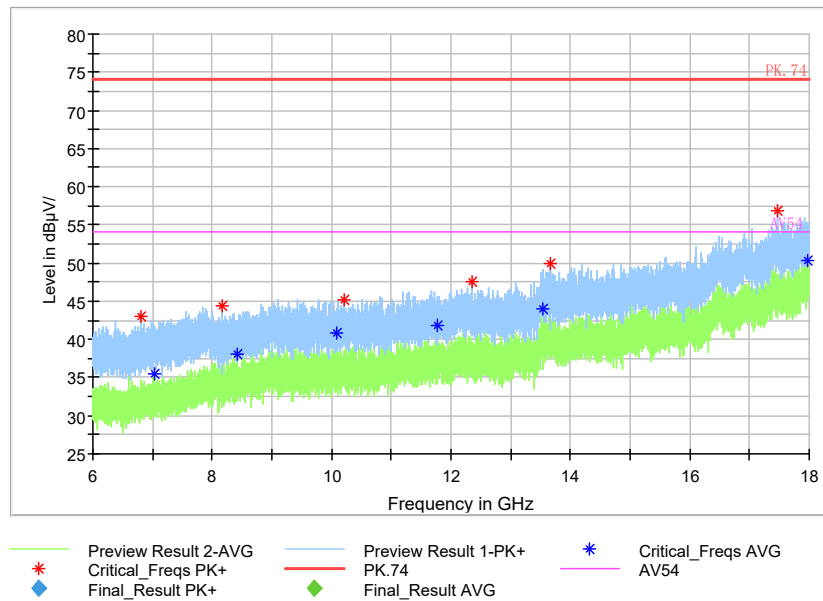

Full Spectrum

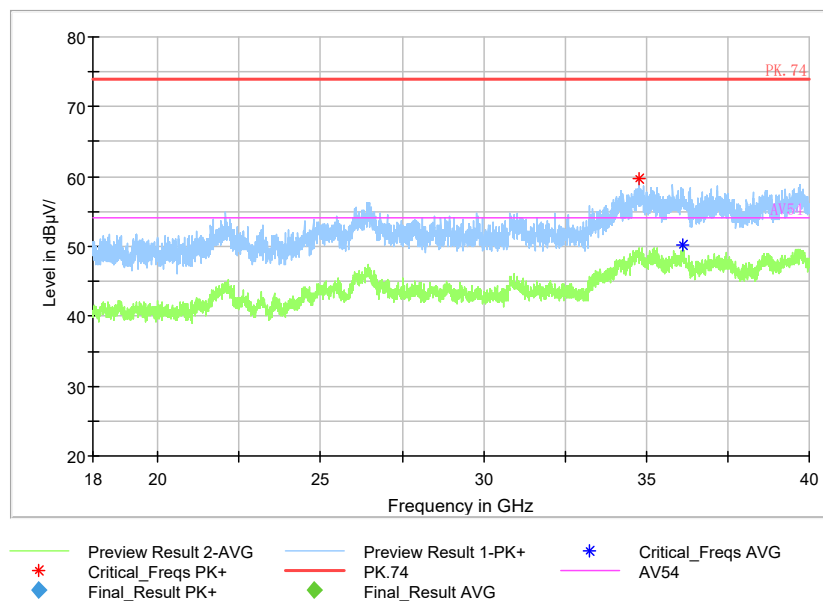


Full Spectrum

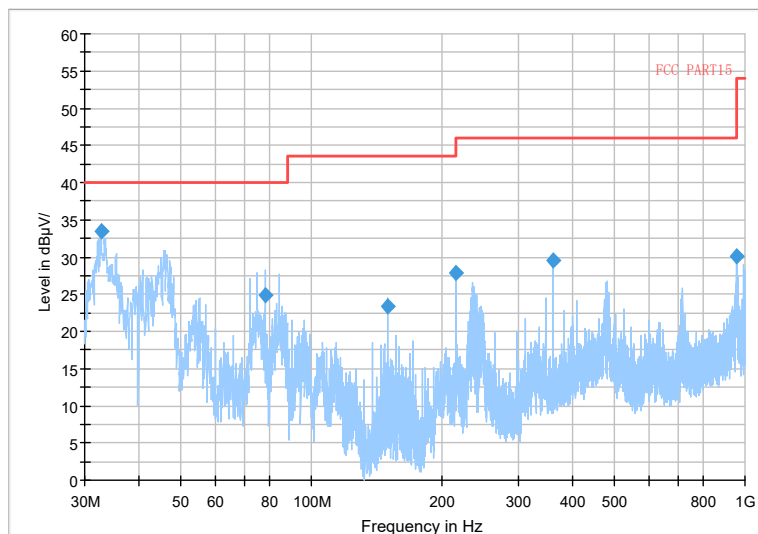


Frequency Range: 30MHz -1GHz
Detector: QP mode
Modulation type: 802.11ac(VHT20 MIMO)

Full Spectrum

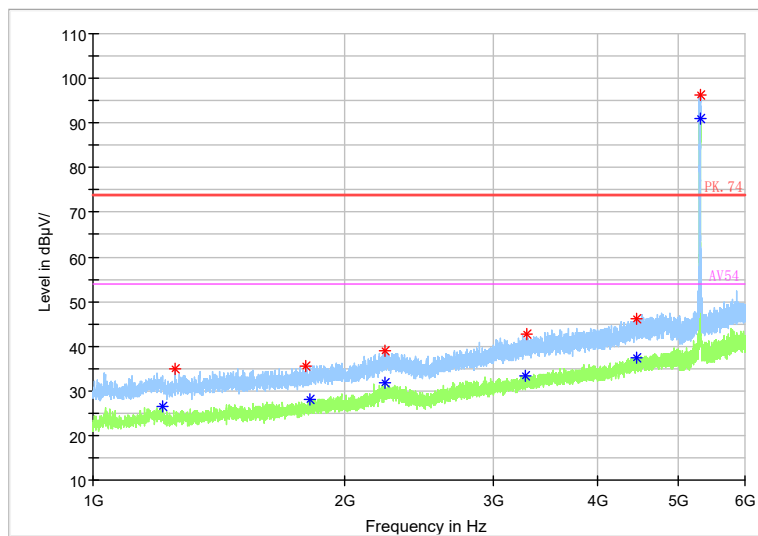

Frequency Range: 1GHz -6GHz
Detector: Av mode and PK mode
Modulation type: 802.11ac(VHT20 MIMO)


Full Spectrum

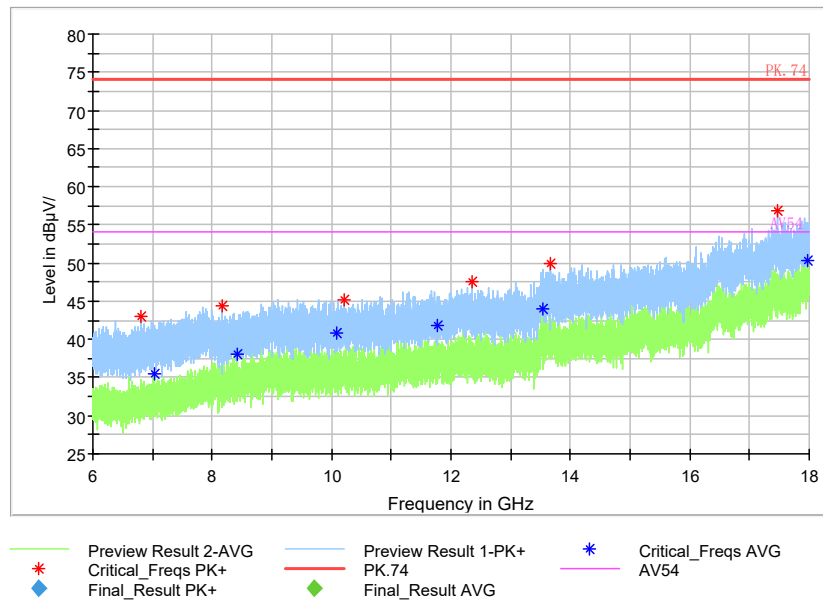


Full Spectrum



Carrier frequency (MHz): 5320
Channel No.:64

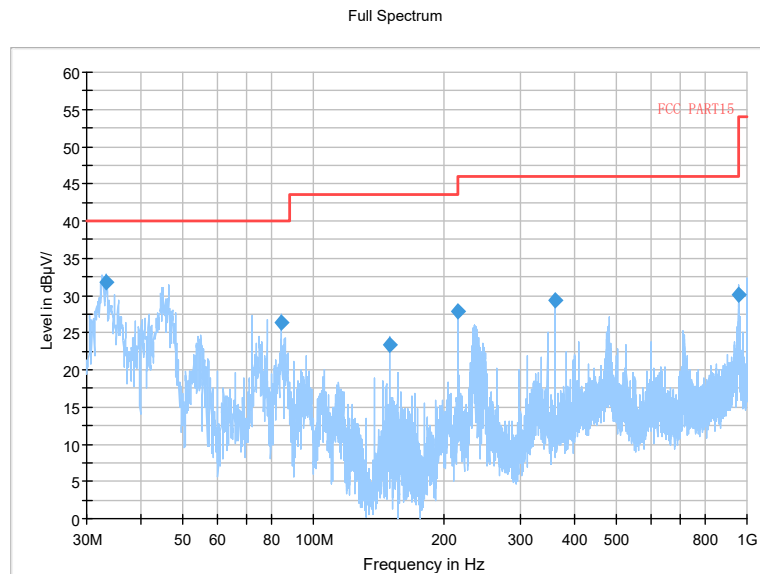


Frequency Range: 30MHz -1GHz
Detector: QP mode
Test Mode: 802.11a(Chain1)

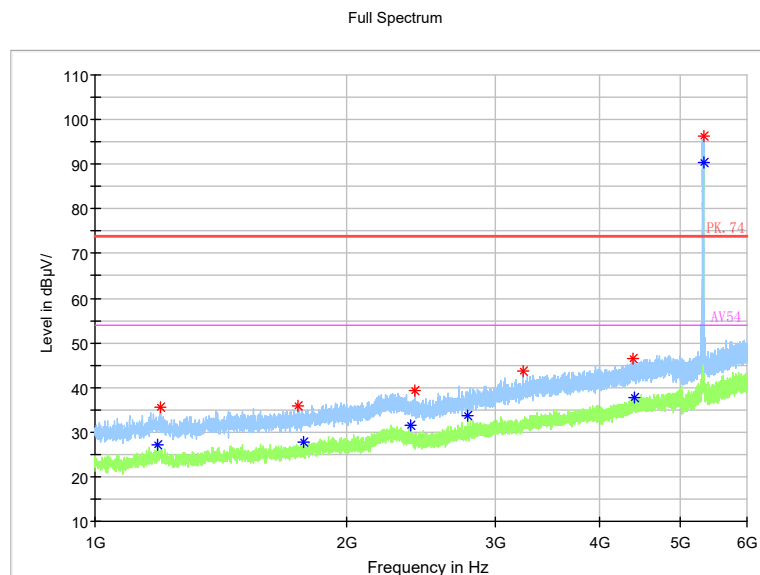


Frequency Range: 1GHz -6GHz
Detector: Av mode and PK mode
Modulation type: 802.11a(Chain1)

Full Spectrum

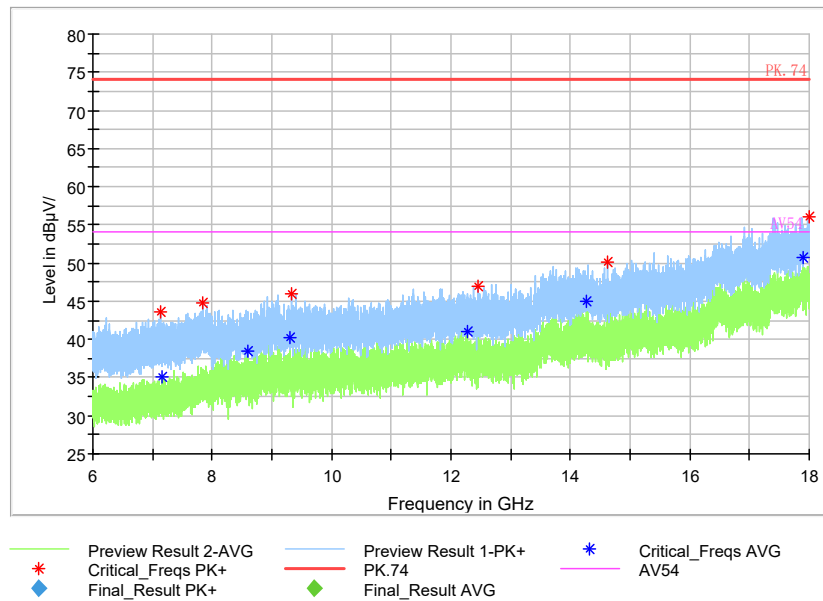


Frequency Range: 6GHz -18GHz
Detector: Av mode and PK mode
Modulation type: 802.11a(Chain1)


Full Spectrum

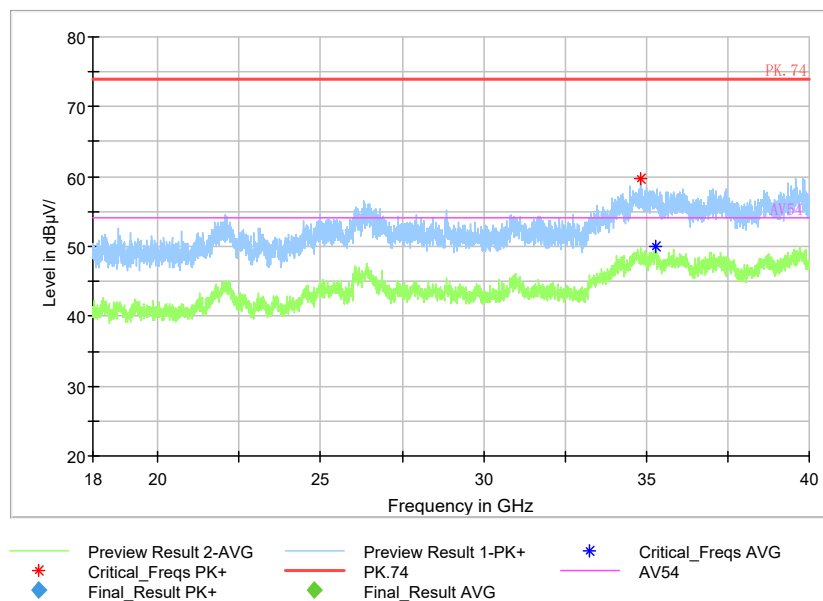

Frequency Range: 18GHz -40GHz
Detector: Av mode and PK mode
Modulation type: 802.11a(Chain1)

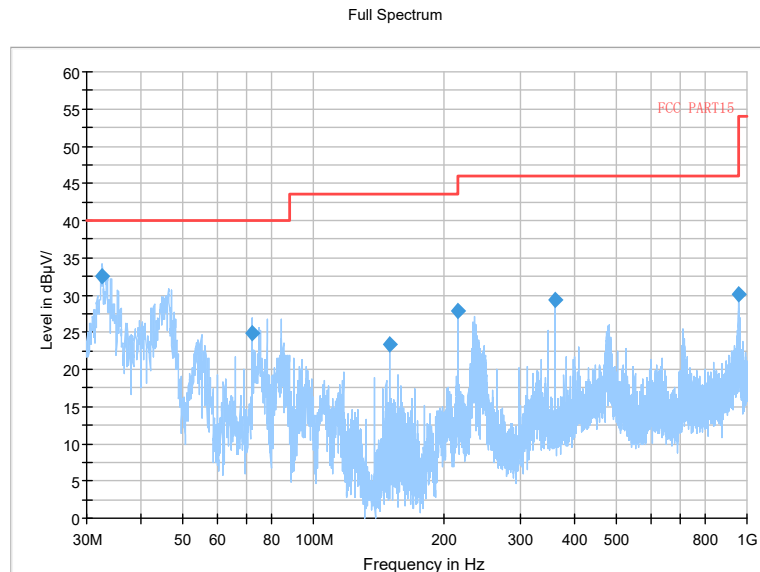


Frequency Range: 30MHz -1GHz
Detector: QP mode
Modulation type: 802.11n(HT20 MIMO)

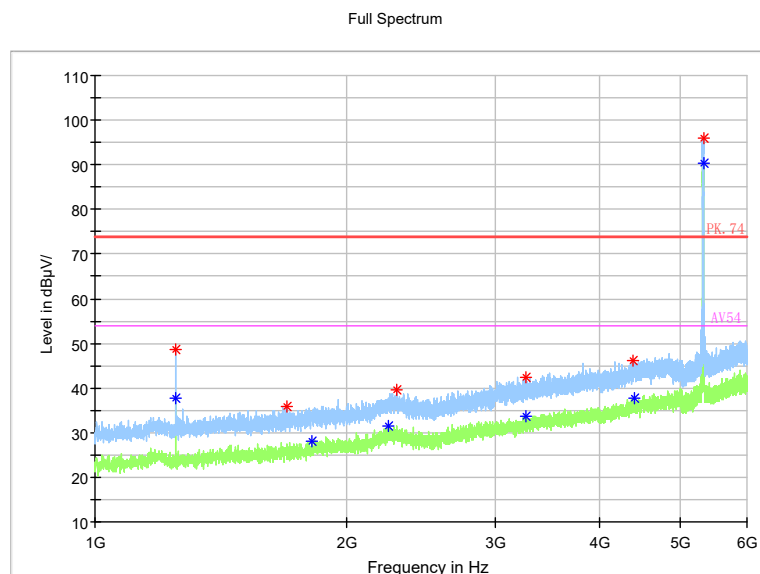


Frequency Range: 1GHz -6GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT20 MIMO)


Full Spectrum

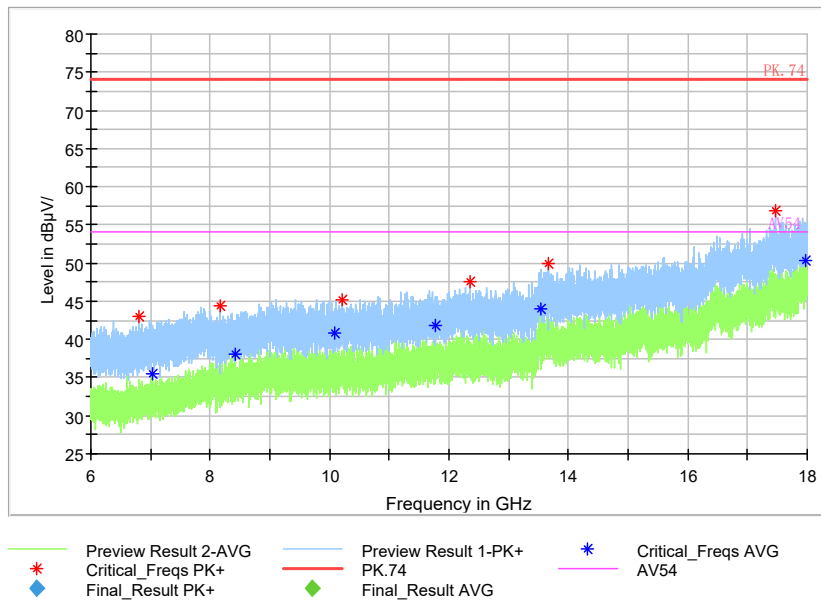

Full Spectrum

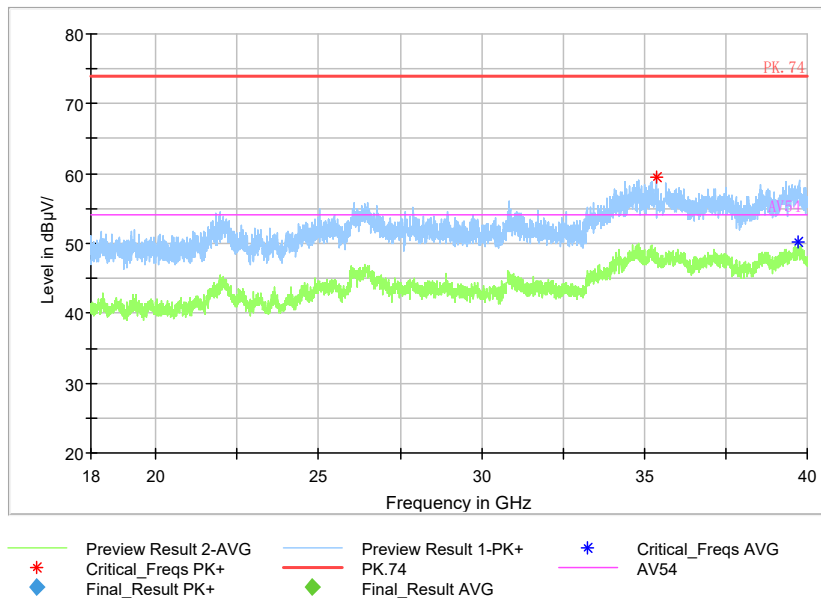


Full Spectrum

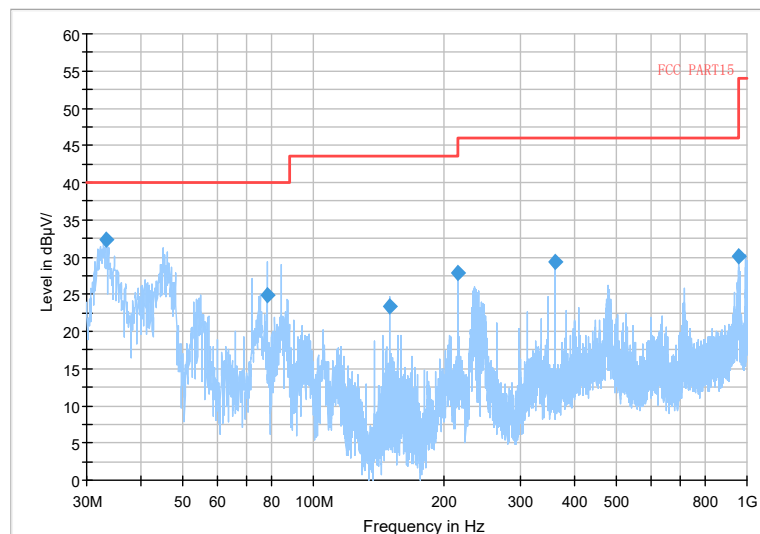


Frequency Range: 30MHz -1GHz
Detector: QP mode
Modulation type: 802.11ac(VHT20 MIMO)

Full Spectrum

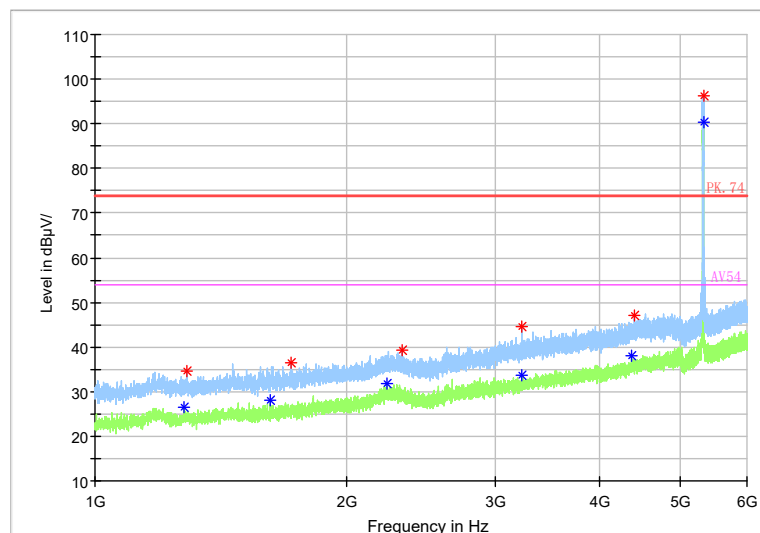


Frequency Range: 1GHz -6GHz
Detector: Av mode and PK mode
Modulation type: 802.11ac(VHT20 MIMO)

Full Spectrum

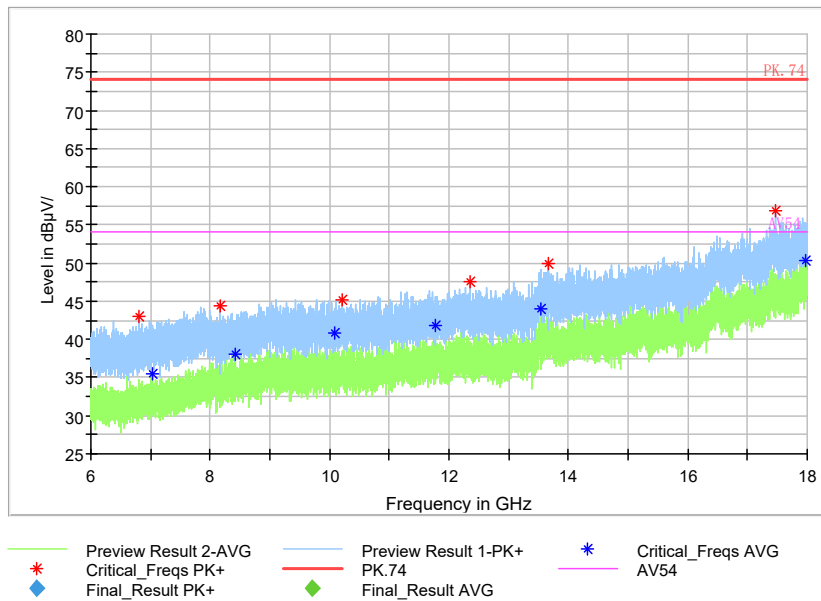


Frequency Range: 6GHz -18GHz
Detector: Av mode and PK mode
Modulation type: 802.11ac(VHT20 MIMO)

Full Spectrum

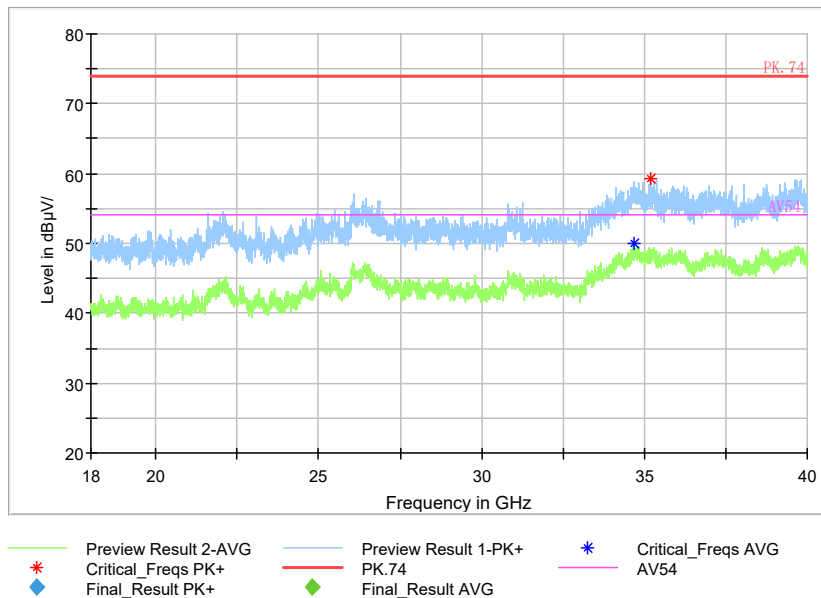


Frequency Range: 18GHz -40GHz
Detector: Av mode and PK mode
Modulation type: 802.11ac(VHT20 MIMO)

Carrier frequency (MHz): 5270
Channel No.:54

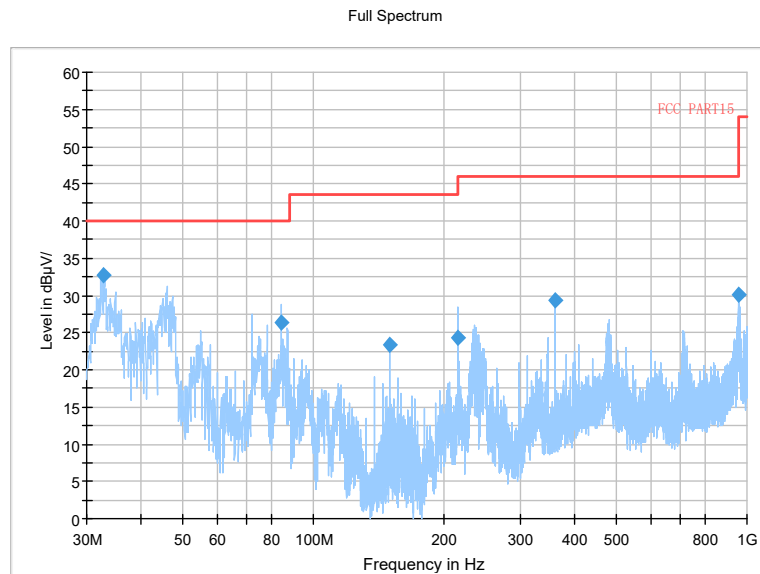


Frequency Range: 30MHz -1GHz
Detector: QP mode
Modulation type: 802.11n(HT40 MIMO)

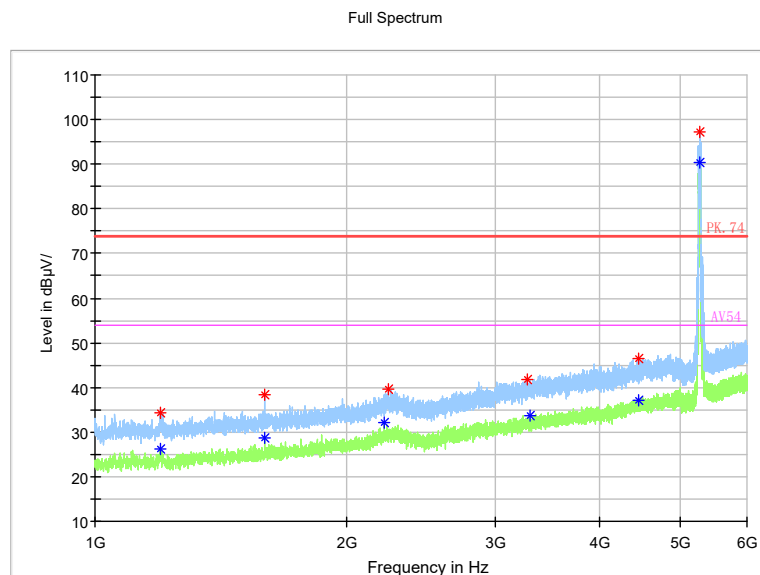


Frequency Range: 1GHz -6GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT40 MIMO)

Full Spectrum

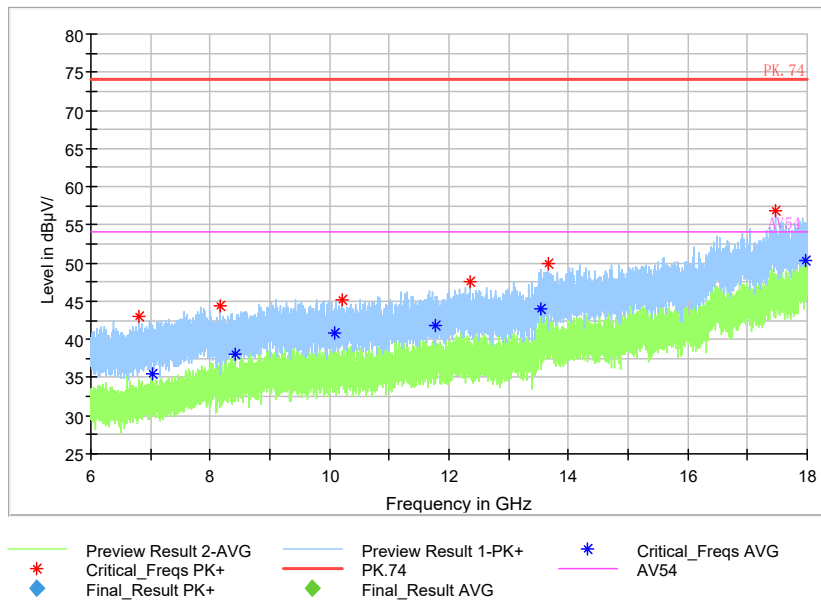


Frequency Range: 6GHz -18GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT40 MIMO)


Full Spectrum

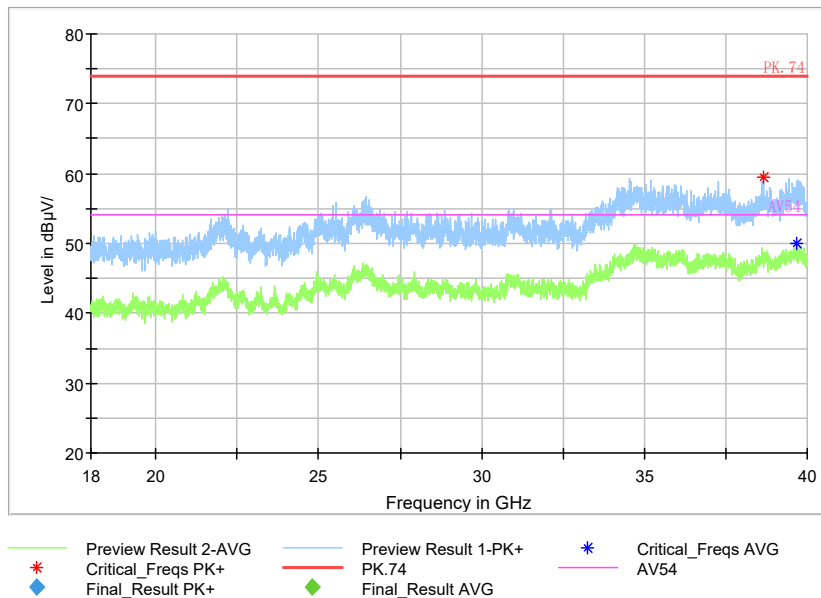

Frequency Range: 18GHz -40GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT40 MIMO)

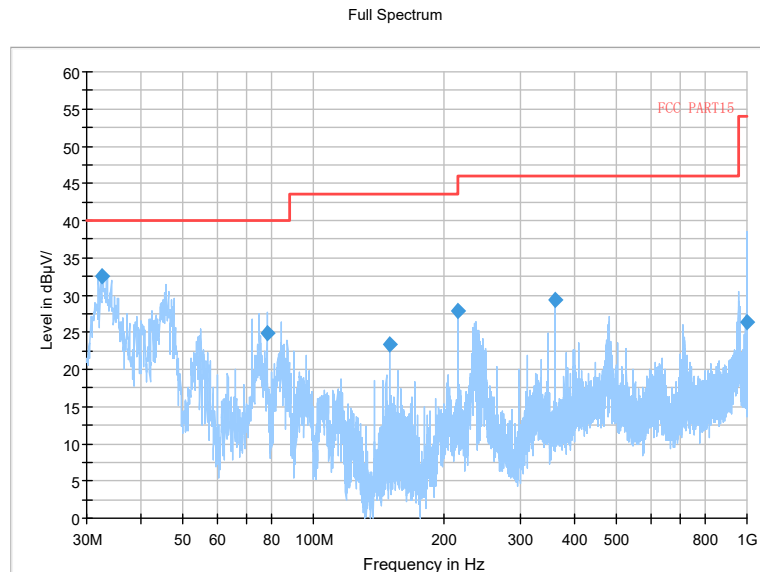


Frequency Range: 30MHz -1GHz
Detector: QP mode
Modulation type: 802.11ac(VHT40 MIMO)

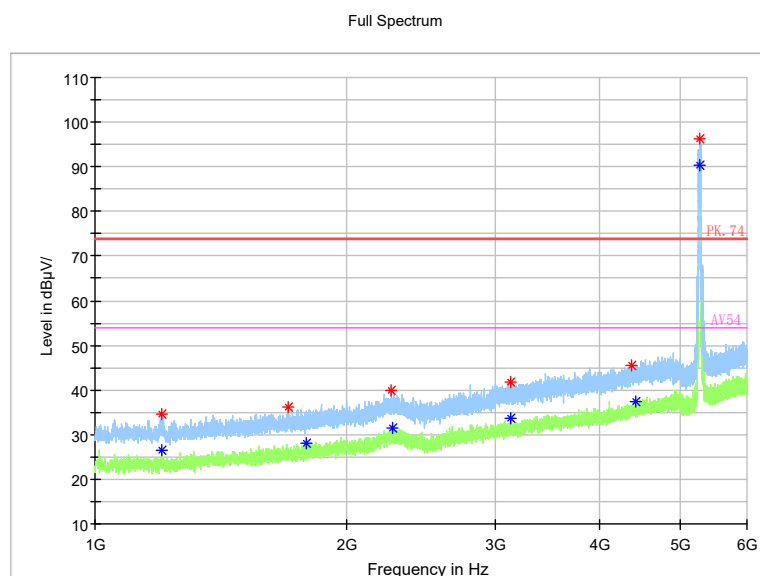


Frequency Range: 1GHz -6GHz
Detector: Av mode and PK mode
Modulation type: 802.11ac(VHT40 MIMO)

Full Spectrum

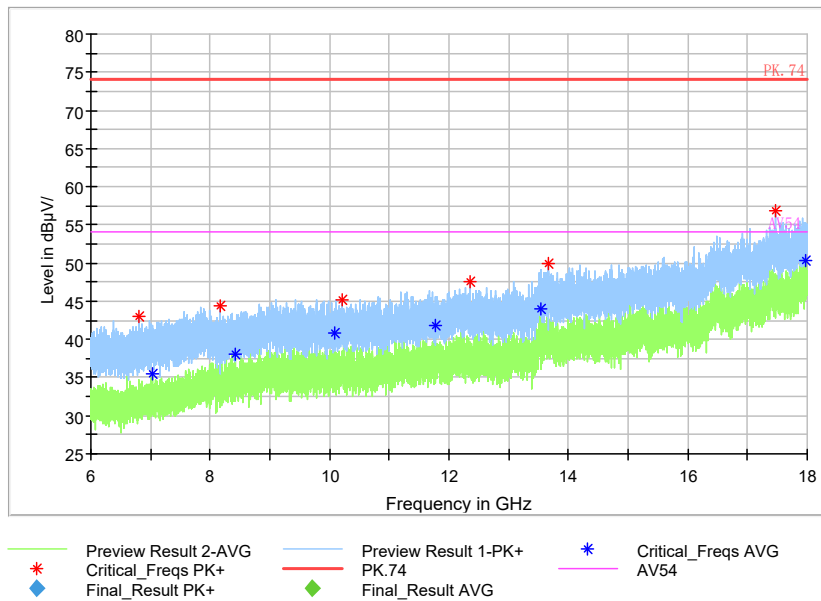


Frequency Range: 6GHz -18GHz
Detector: Av mode and PK mode
Modulation type: 802.11ac(VHT40 MIMO)

Full Spectrum

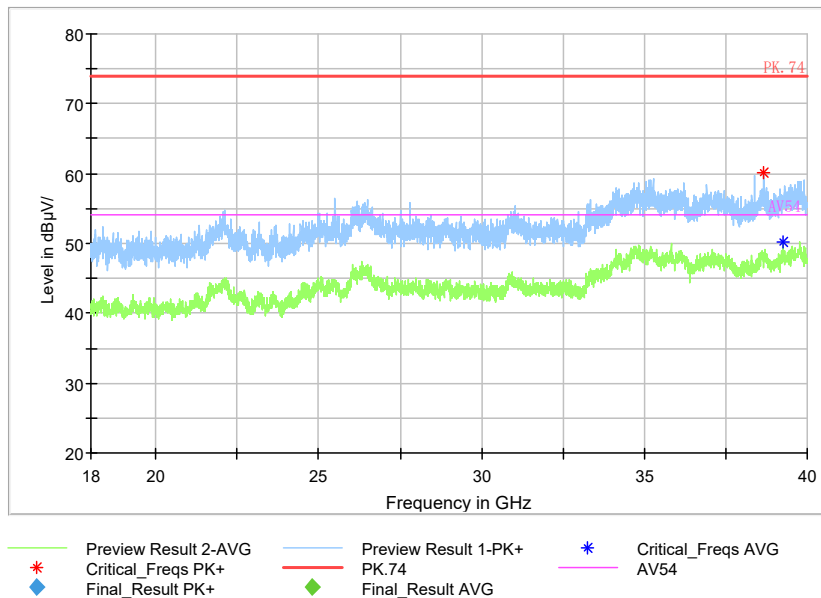


Frequency Range: 18GHz -40GHz
Detector: Av mode and PK mode
Modulation type: 802.11ac(VHT40 MIMO)

Carrier frequency (MHz): 5310
Channel No.:62

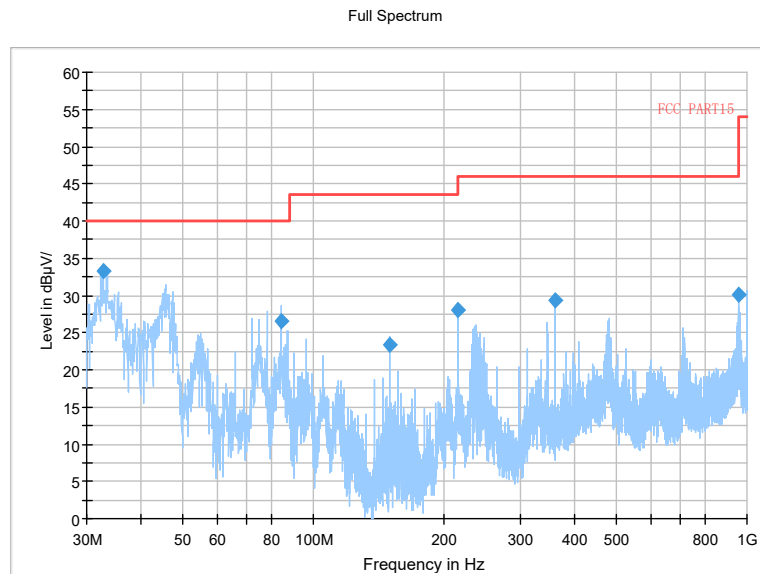


Frequency Range: 30MHz -1GHz
Detector: QP mode
Modulation type: 802.11n(HT40 MIMO)

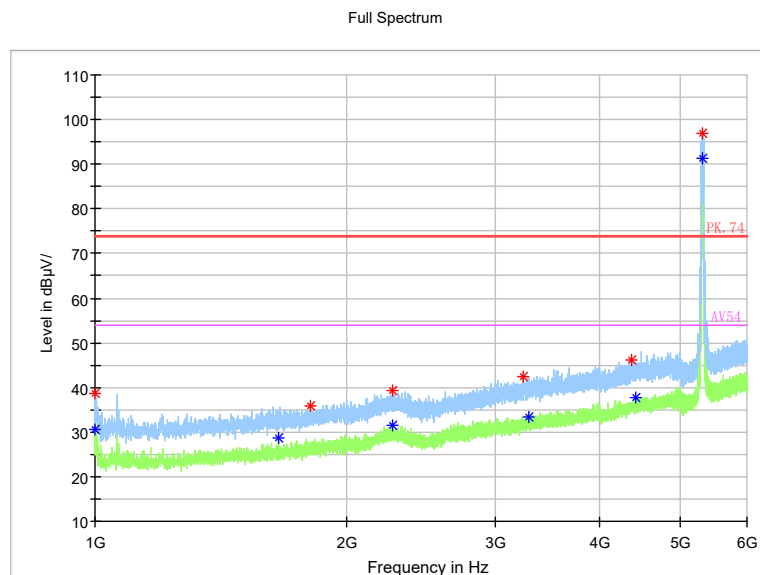


Frequency Range: 1GHz -6GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT40 MIMO)

Full Spectrum

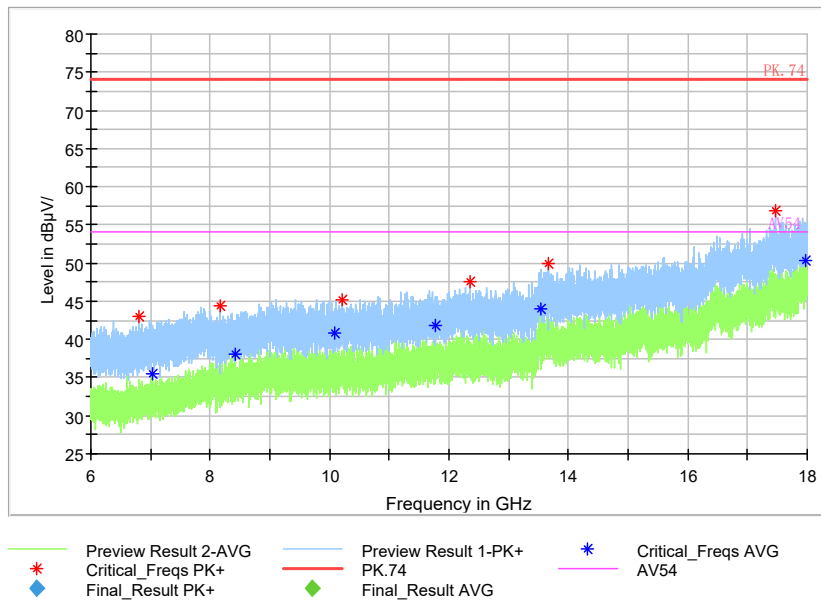


Frequency Range: 6GHz -18GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT40 MIMO)


Full Spectrum

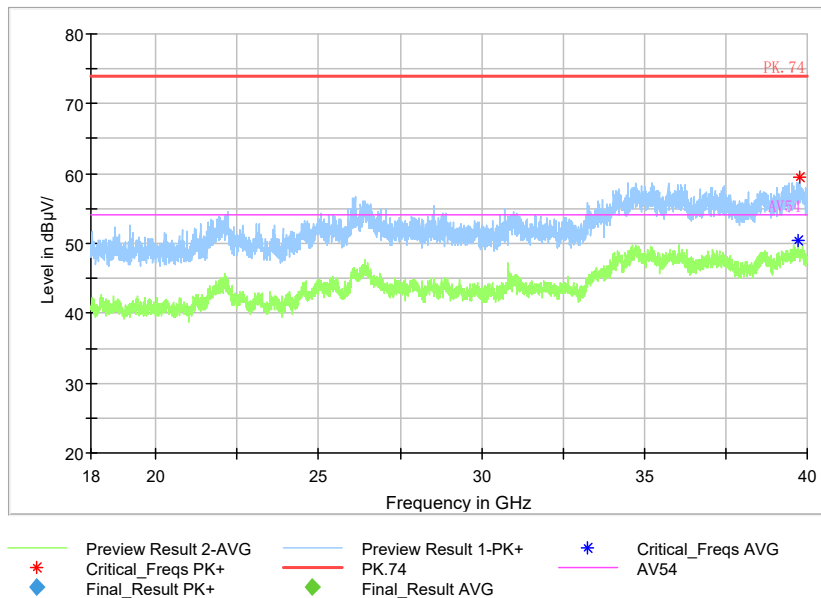

Frequency Range: 18GHz -40GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT40 MIMO)

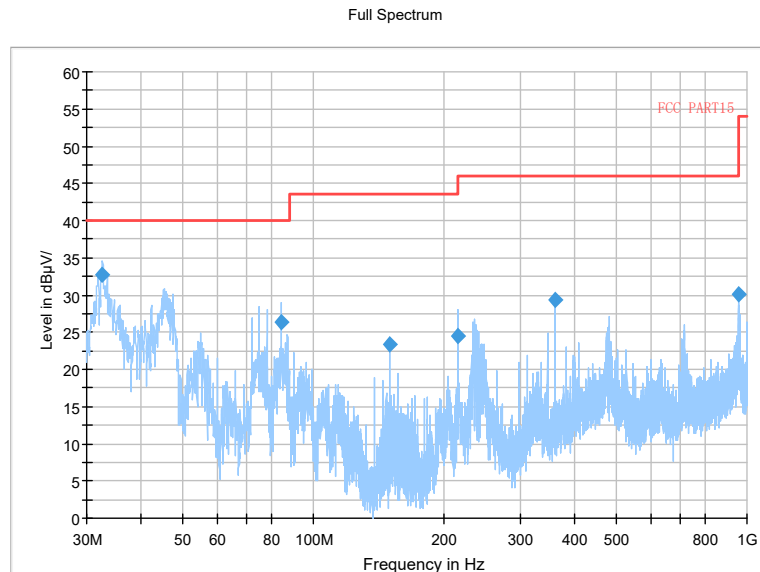


Frequency Range: 30MHz -1GHz
Detector: QP mode
Modulation type: 802.11ac(VHT40 MIMO)

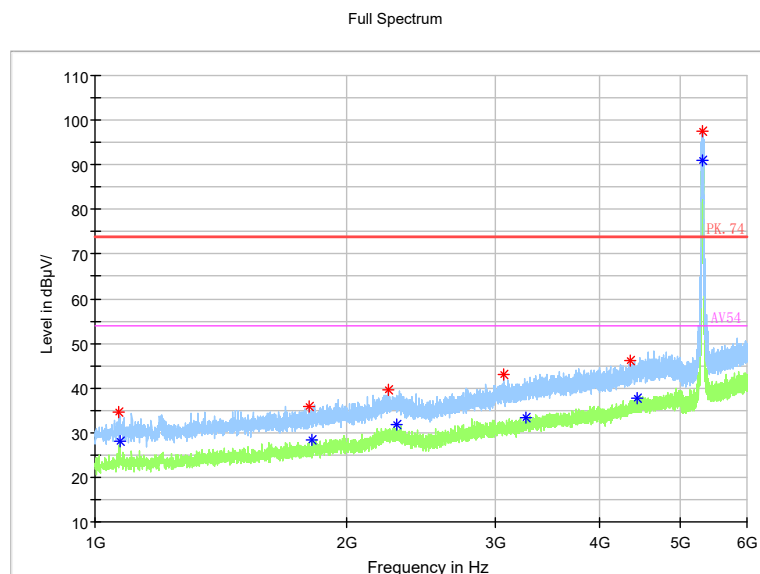

Frequency Range: 1GHz -6GHz
Detector: Av mode and PK mode
Modulation type: 802.11ac(VHT40 MIMO)

Full Spectrum

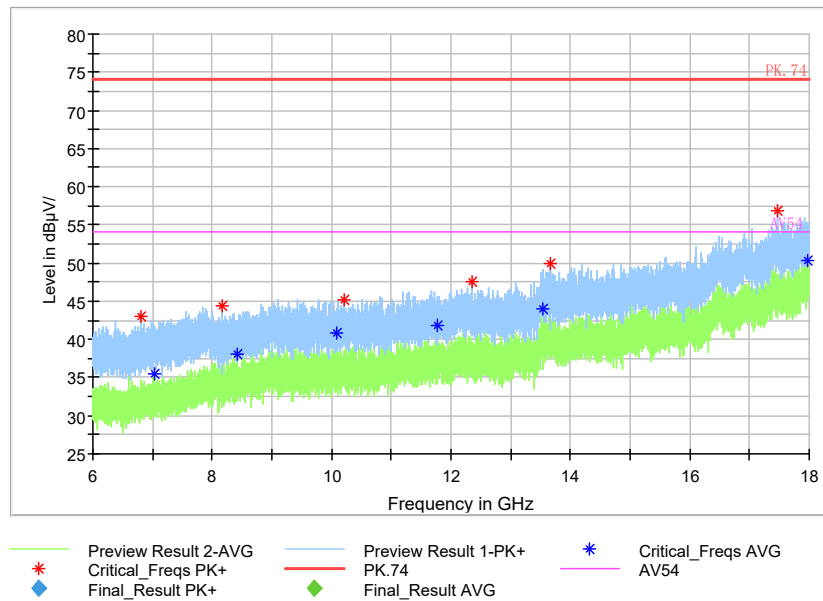


Frequency Range: 6GHz -18GHz
Detector: Av mode and PK mode
Modulation type: 802.11ac(VHT40 MIMO)

Full Spectrum




Frequency Range: 18GHz -40GHz
Detector: Av mode and PK mode
Modulation type: 802.11ac(VHT40 MIMO)

Carrier frequency (MHz): 5290
Channel No.:58

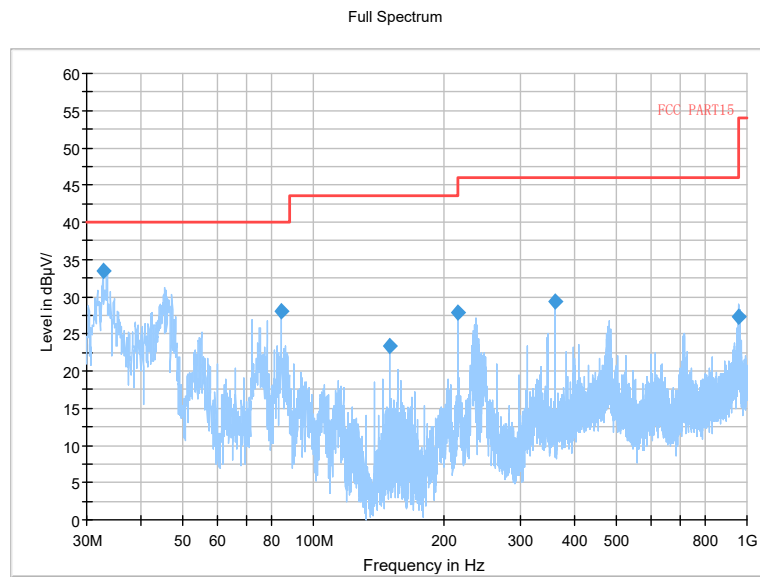


Frequency Range: 30MHz -1GHz
Detector: QP mode
Modulation type: 802.11ac(VHT80 MIMO)

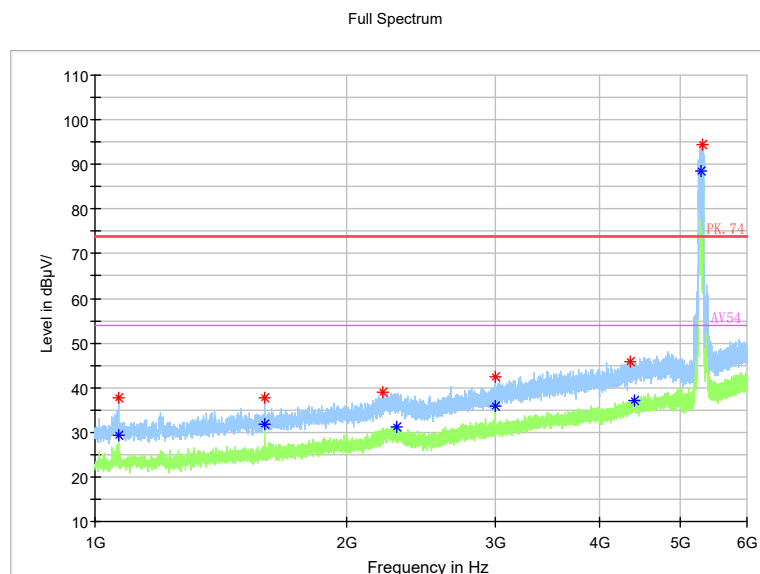


Frequency Range: 1GHz -6GHz
Detector: Av mode and PK mode
Modulation type: 802.11ac(VHT80 MIMO)

Full Spectrum

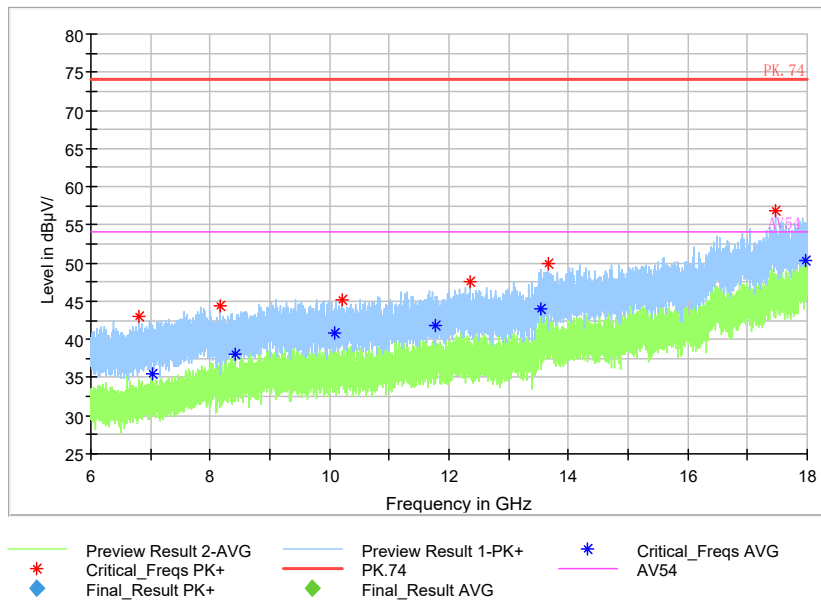


Frequency Range: 6GHz -18GHz
Detector: Av mode and PK mode
Modulation type: 802.11ac(VHT80 MIMO)

Full Spectrum

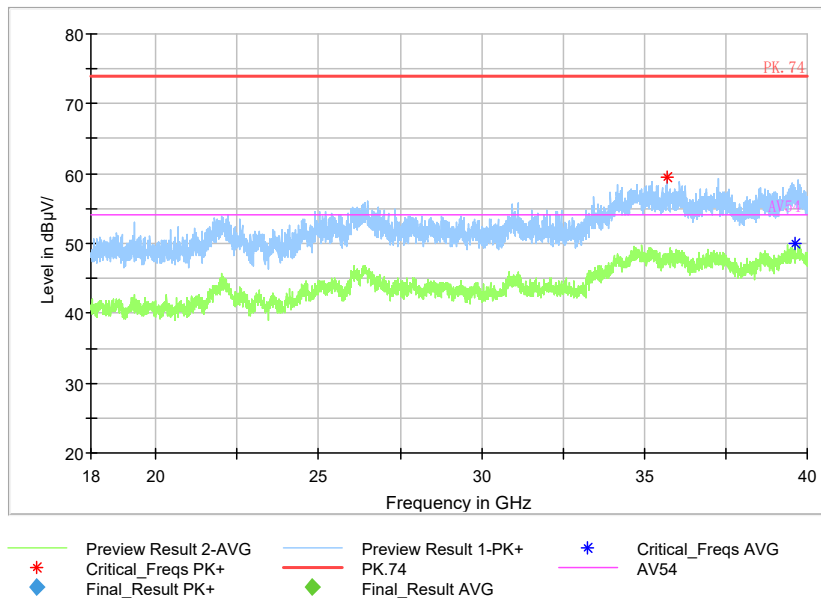


Frequency Range: 18GHz -40GHz
Detector: Av mode and PK mode
Modulation type: 802.11ac(VHT80 MIMO)

Carrier frequency (MHz): 5500
Channel No.:100

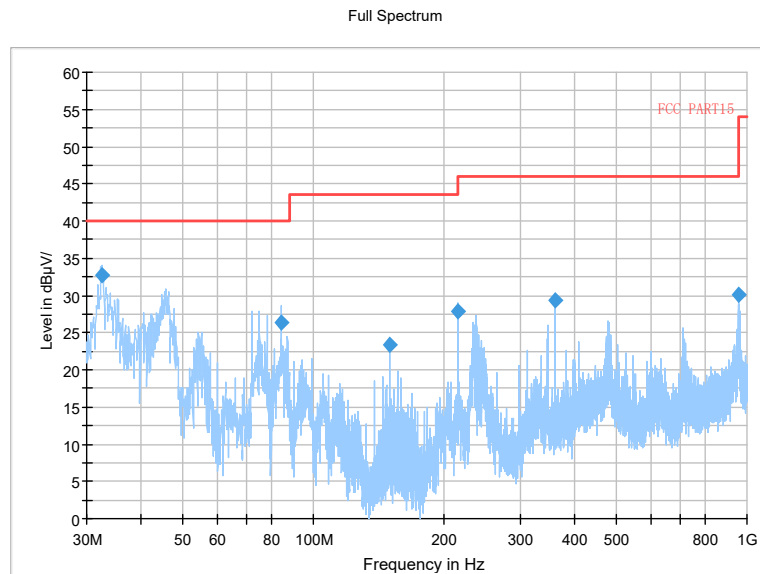


Frequency Range: 30MHz -1GHz
Detector: QP mode
Test Mode: 802.11a(Chain1)

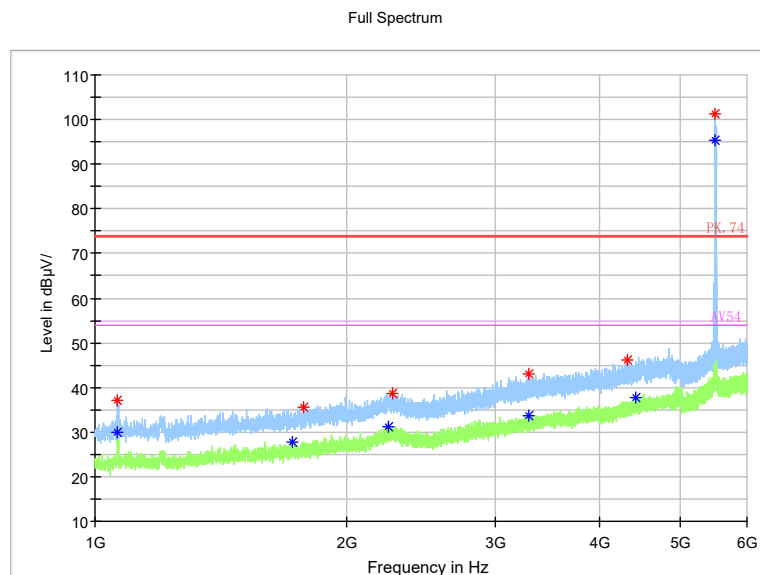


Frequency Range: 1GHz -6GHz
Detector: Av mode and PK mode
Modulation type: 802.11a(Chain1)

Full Spectrum

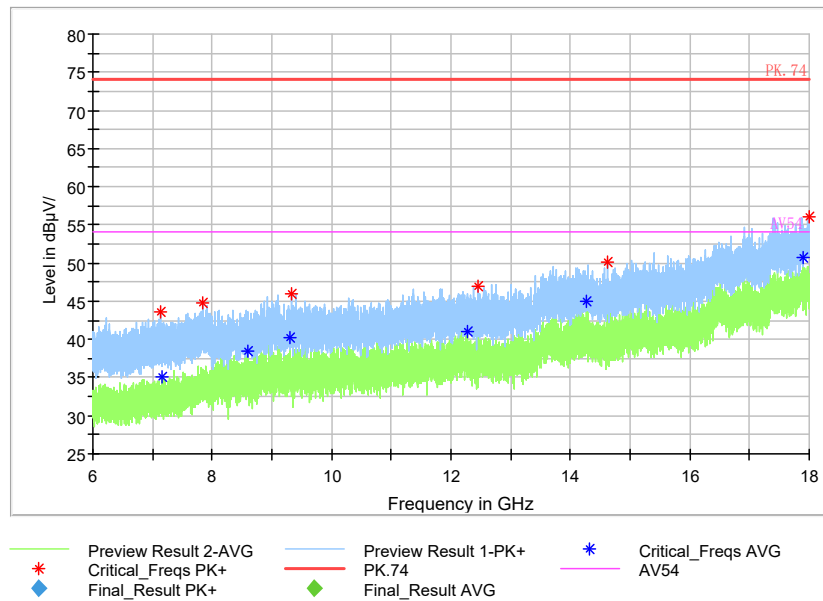


Frequency Range: 6GHz -18GHz
Detector: Av mode and PK mode
Modulation type: 802.11a(Chain1)


Full Spectrum

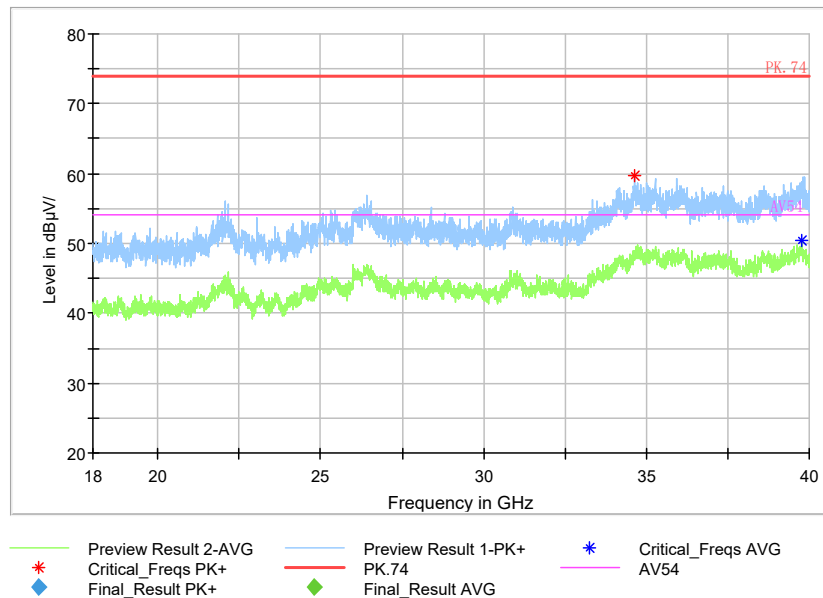

Frequency Range: 18GHz -40GHz
Detector: Av mode and PK mode
Modulation type: 802.11a(Chain1)

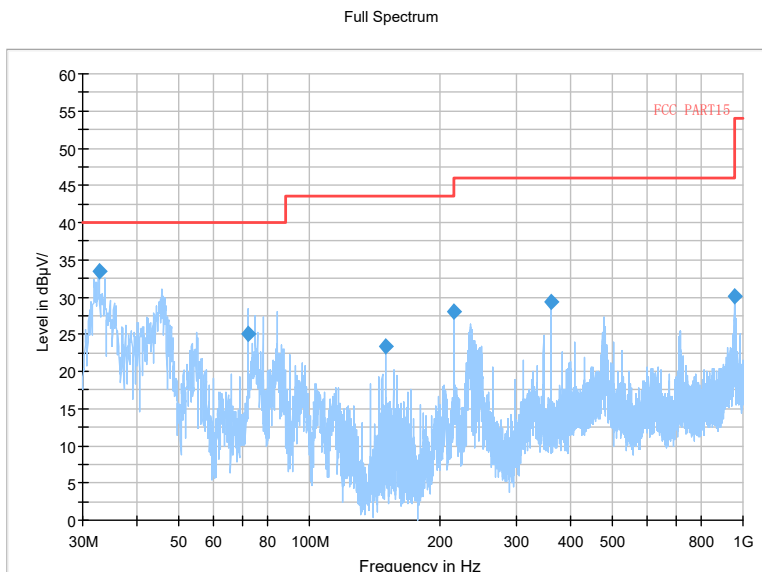


Frequency Range: 30MHz -1GHz
Detector: QP mode
Modulation type: 802.11n(HT20 MIMO)

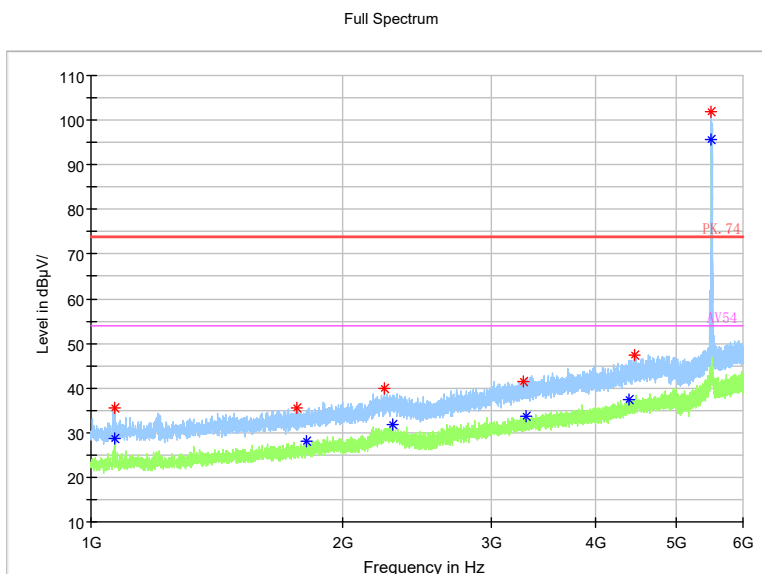


Frequency Range: 1GHz -6GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT20 MIMO)

Full Spectrum

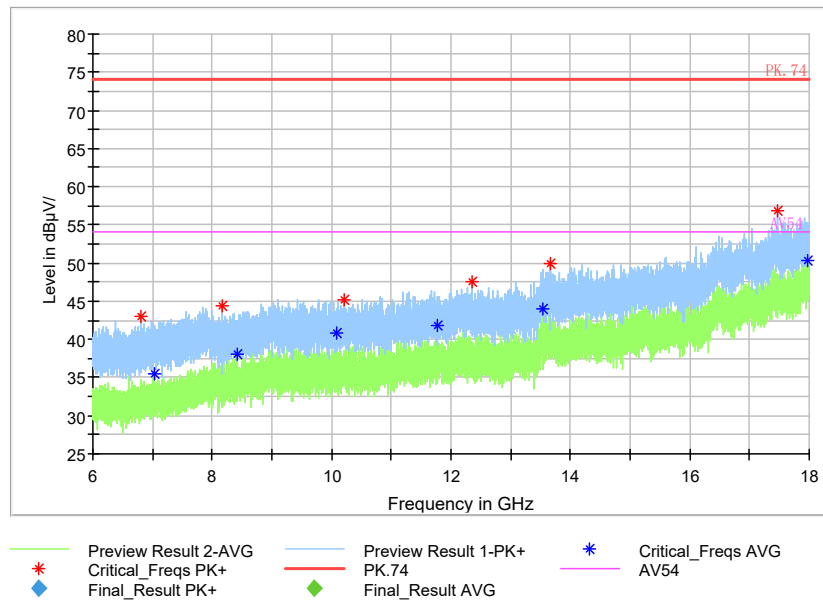


Full Spectrum



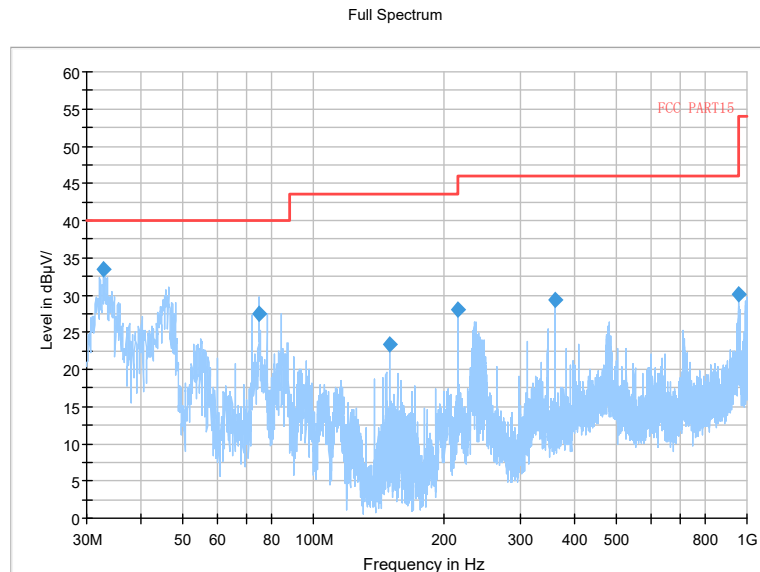


Frequency Range: 30MHz -1GHz
Detector: QP mode
Modulation type: 802.11ac(VHT20 MIMO)

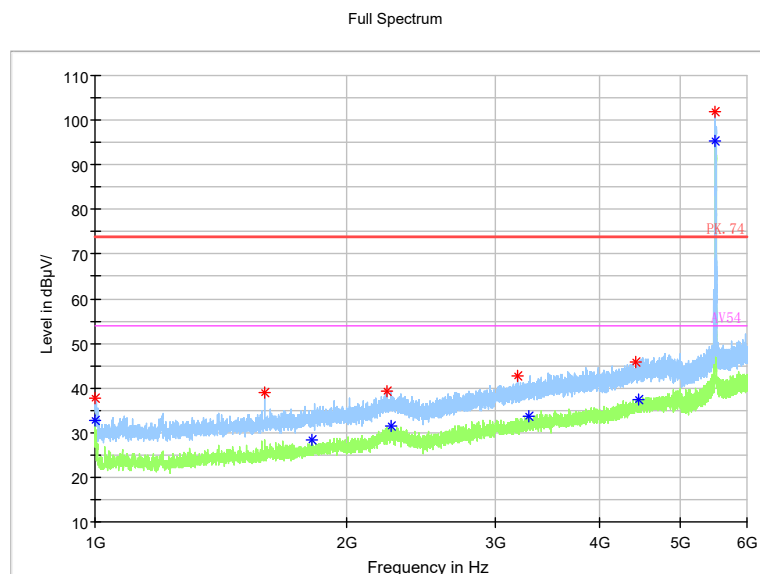


Frequency Range: 1GHz -6GHz
Detector: Av mode and PK mode
Modulation type: 802.11ac(VHT20 MIMO)

Full Spectrum

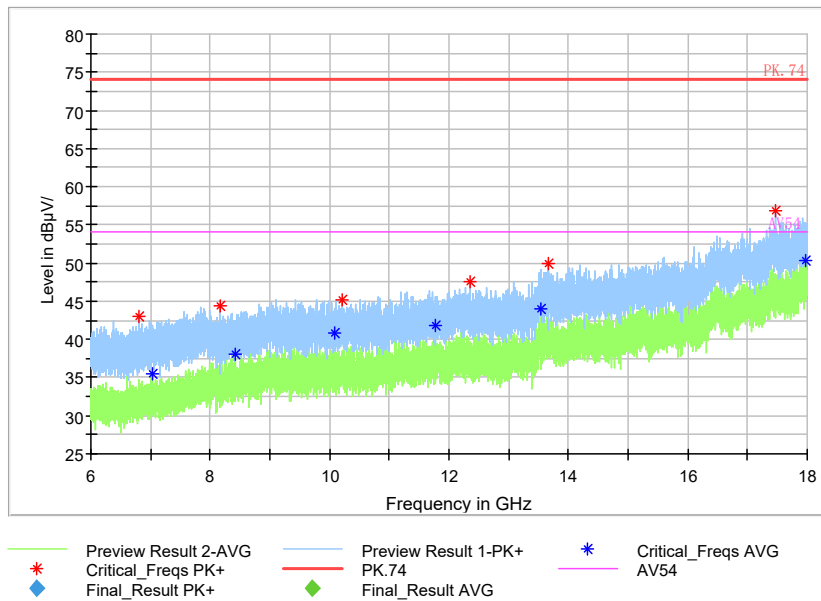


Frequency Range: 6GHz -18GHz
Detector: Av mode and PK mode
Modulation type: 802.11ac(VHT20 MIMO)

Full Spectrum

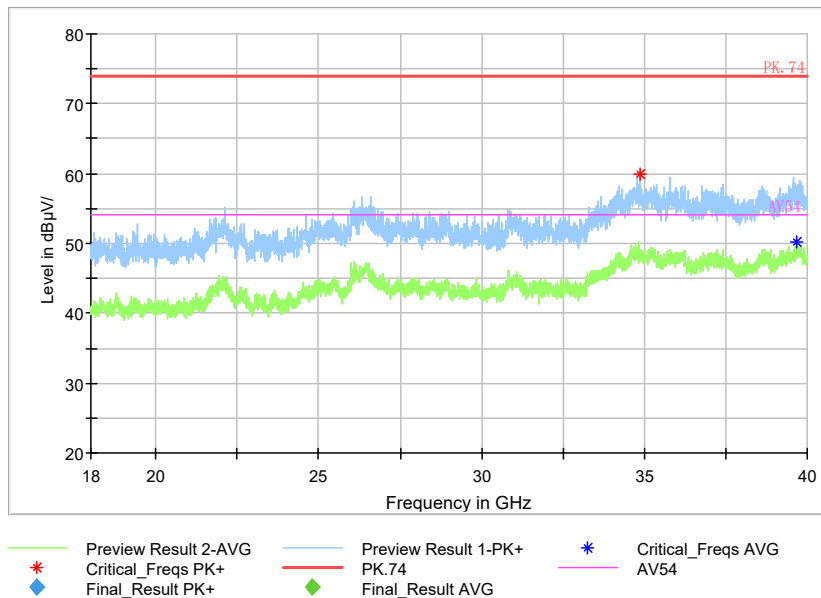


Frequency Range: 18GHz -40GHz
Detector: Av mode and PK mode
Modulation type: 802.11ac(VHT20 MIMO)

Carrier frequency (MHz): 5600
Channel No.:120

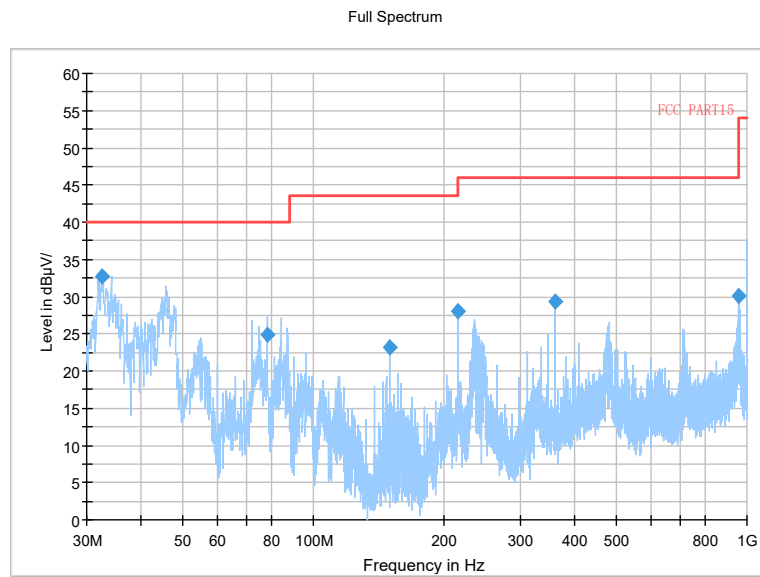


Frequency Range: 30MHz -1GHz
Detector: QP mode
Test Mode: 802.11a(Chain1)

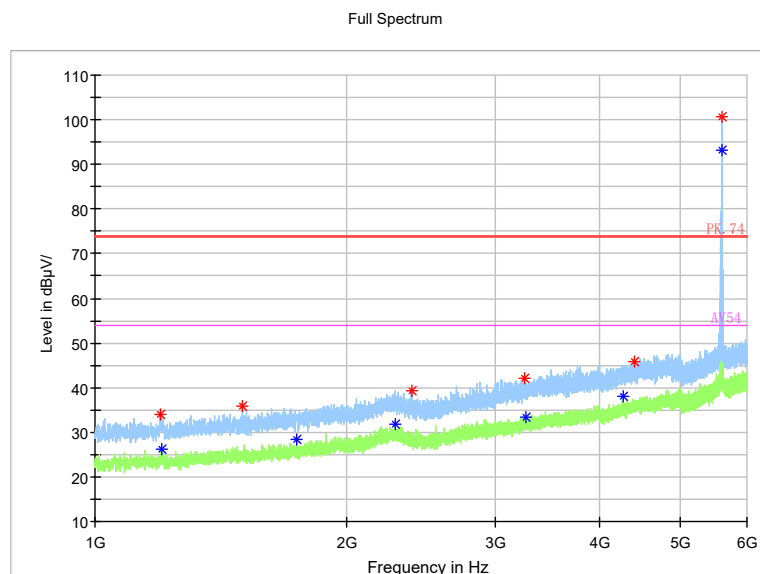

Frequency Range: 1GHz -6GHz
Detector: Av mode and PK mode
Modulation type: 802.11a(Chain1)

Full Spectrum

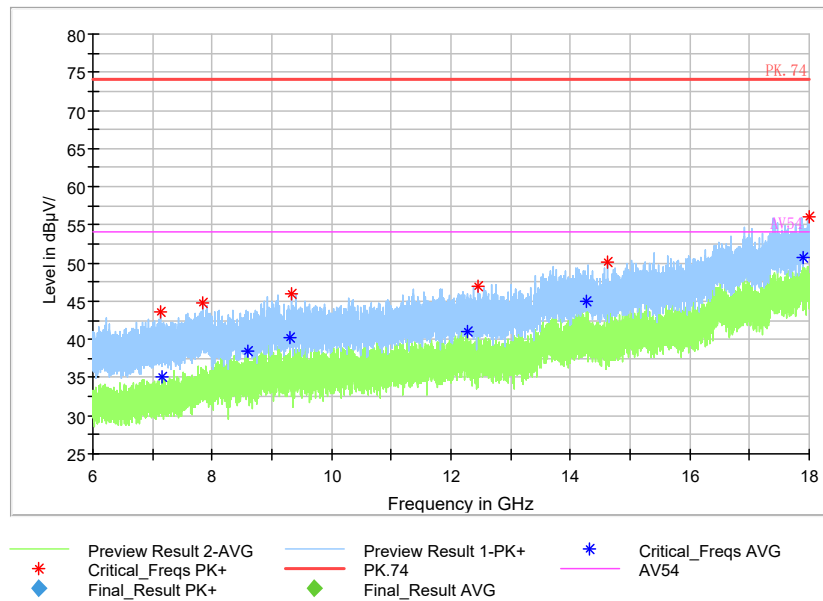


Frequency Range: 6GHz -18GHz
Detector: Av mode and PK mode
Modulation type: 802.11a(Chain1)

Full Spectrum




Frequency Range: 18GHz -40GHz
Detector: Av mode and PK mode
Modulation type: 802.11a(Chain1)

Full Spectrum

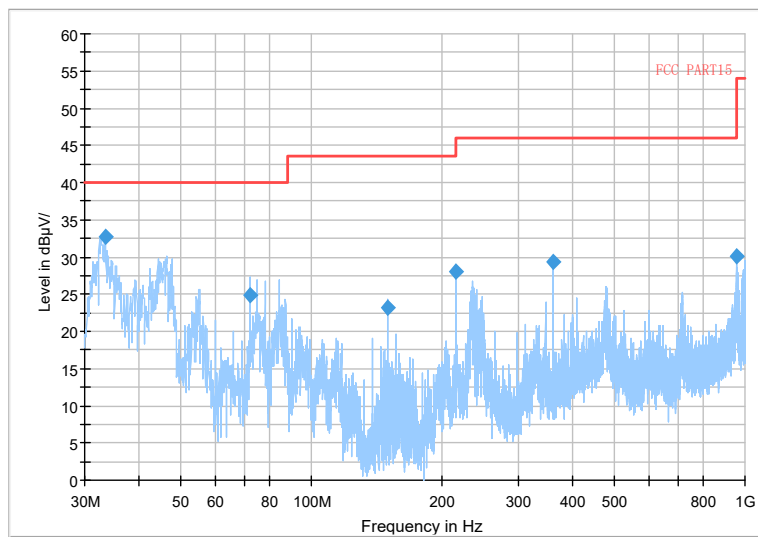


Frequency Range: 30MHz -1GHz
Detector: QP mode
Modulation type: 802.11n(HT20 MIMO)

Full Spectrum

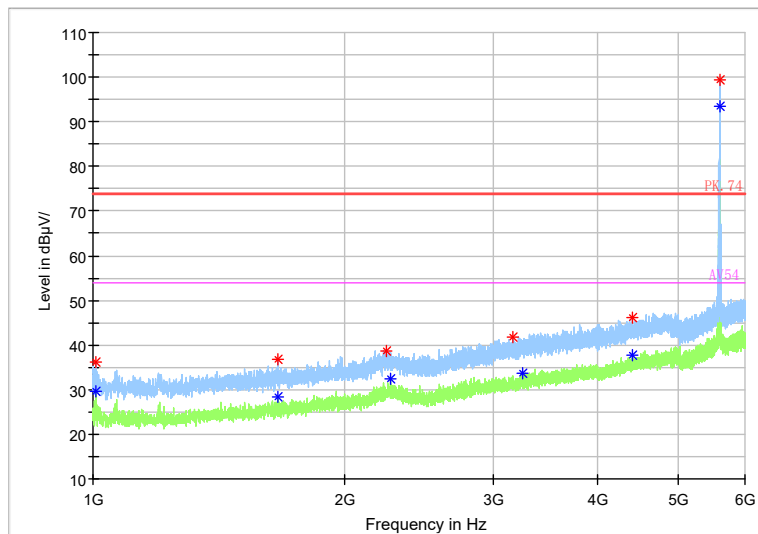


Frequency Range: 1GHz -6GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT20 MIMO)

Full Spectrum

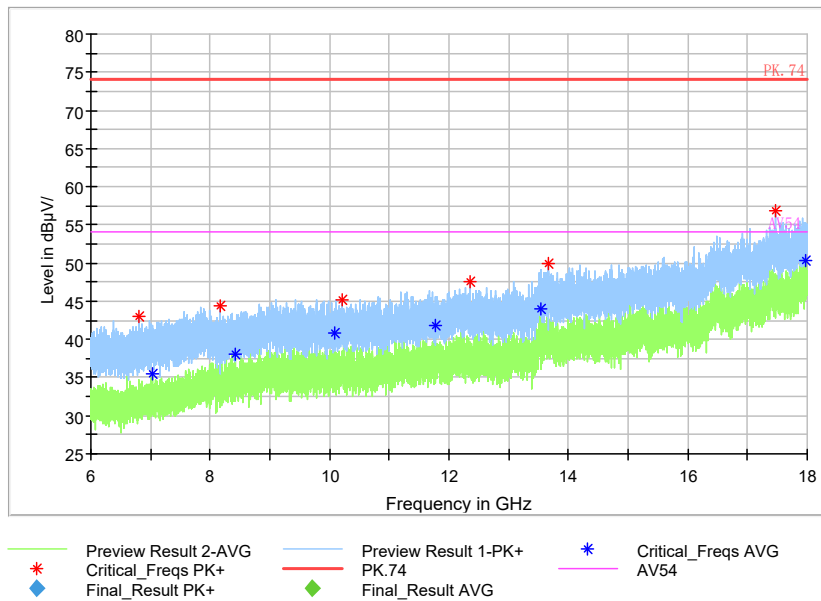


Frequency Range: 6GHz -18GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT20 MIMO)


Full Spectrum

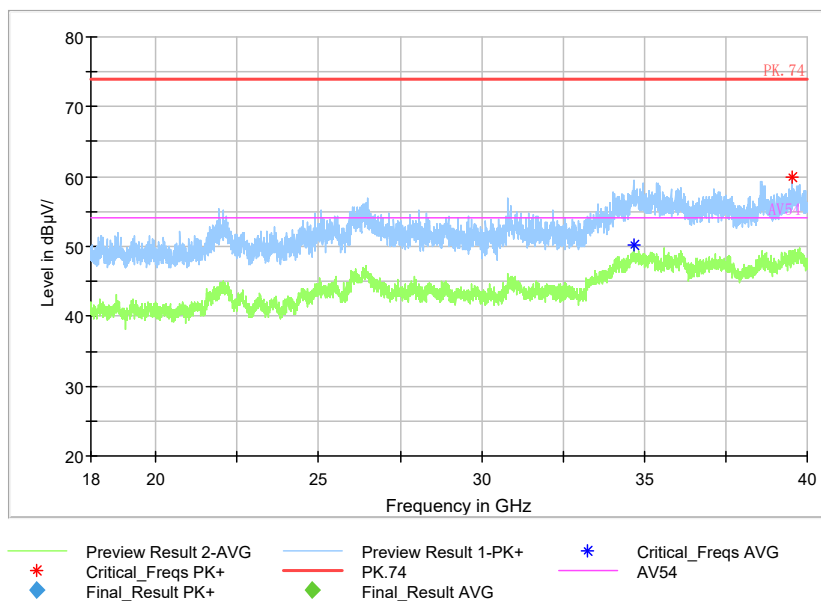

Frequency Range: 18GHz -40GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT20 MIMO)

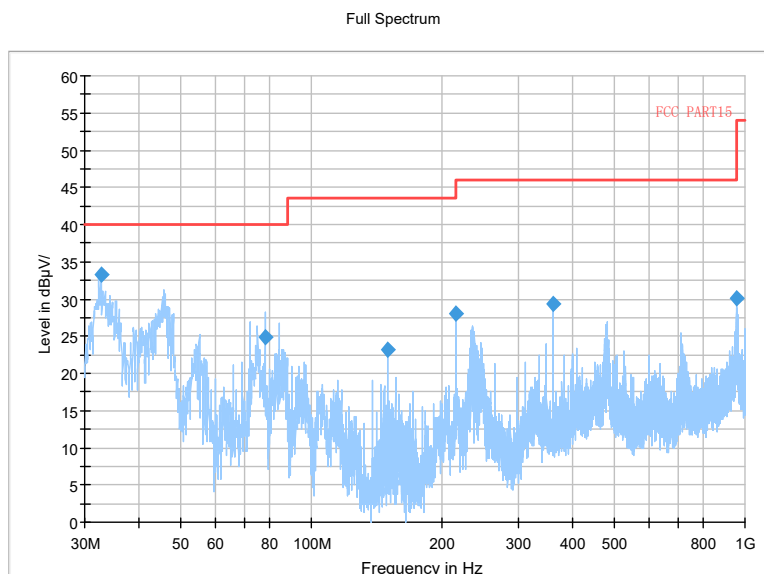


Frequency Range: 30MHz -1GHz
Detector: QP mode
Modulation type: 802.11ac(VHT20 MIMO)

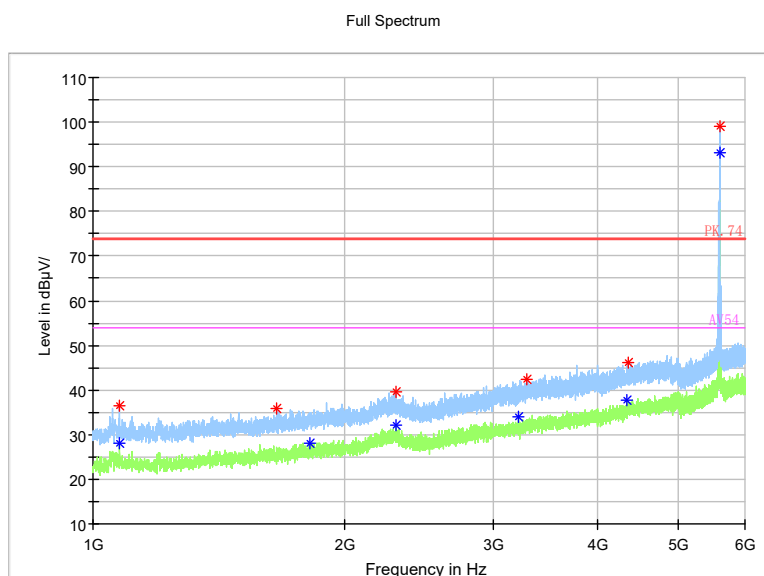

Frequency Range: 1GHz -6GHz
Detector: Av mode and PK mode
Modulation type: 802.11ac(VHT20 MIMO)

Full Spectrum

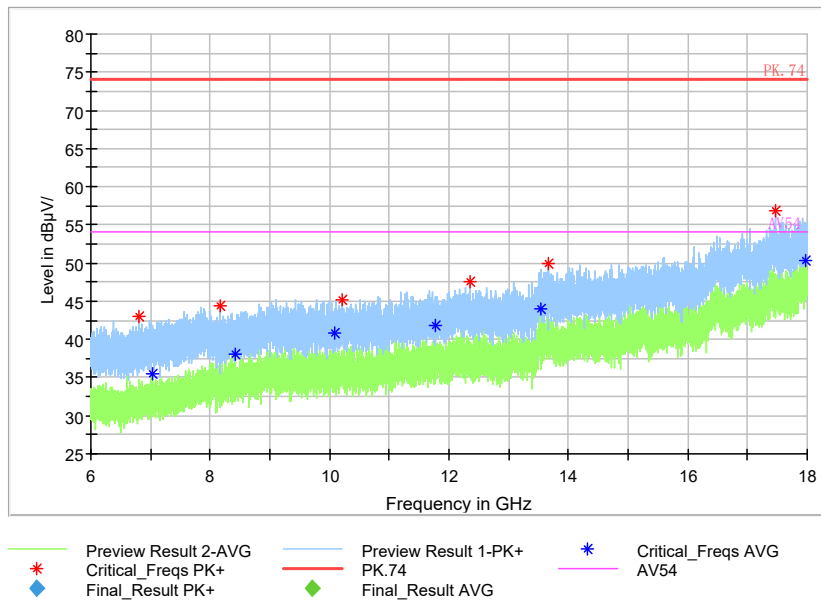


Frequency Range: 6GHz -18GHz
Detector: Av mode and PK mode
Modulation type: 802.11ac(VHT20 MIMO)

Full Spectrum




Frequency Range: 18GHz -40GHz
Detector: Av mode and PK mode
Modulation type: 802.11ac(VHT20 MIMO)

Carrier frequency (MHz): 5720
Channel No.:144

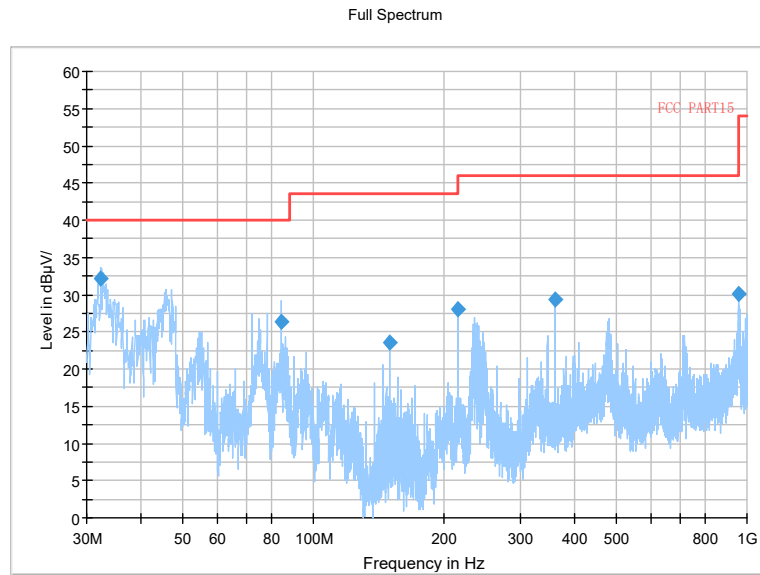


Frequency Range: 30MHz -1GHz
Detector: QP mode
Test Mode: 802.11a(Chain1)

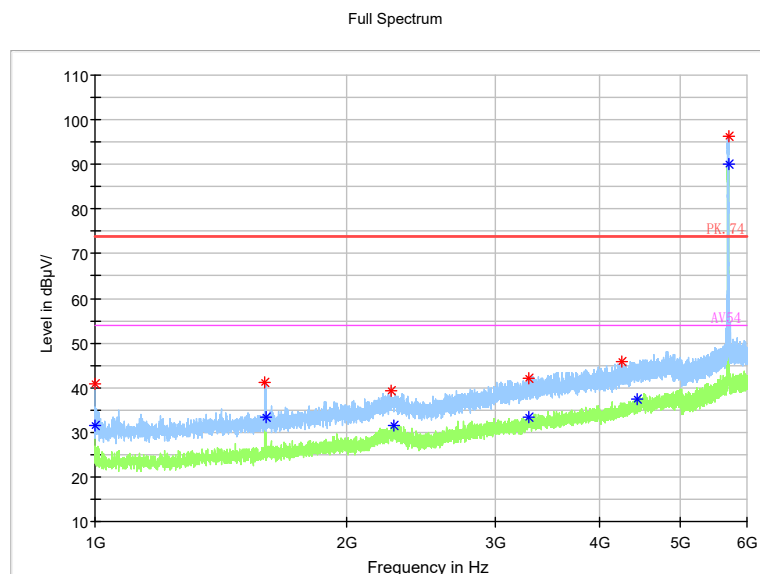


Frequency Range: 1GHz -6GHz
Detector: Av mode and PK mode
Modulation type: 802.11a(Chain1)

Full Spectrum

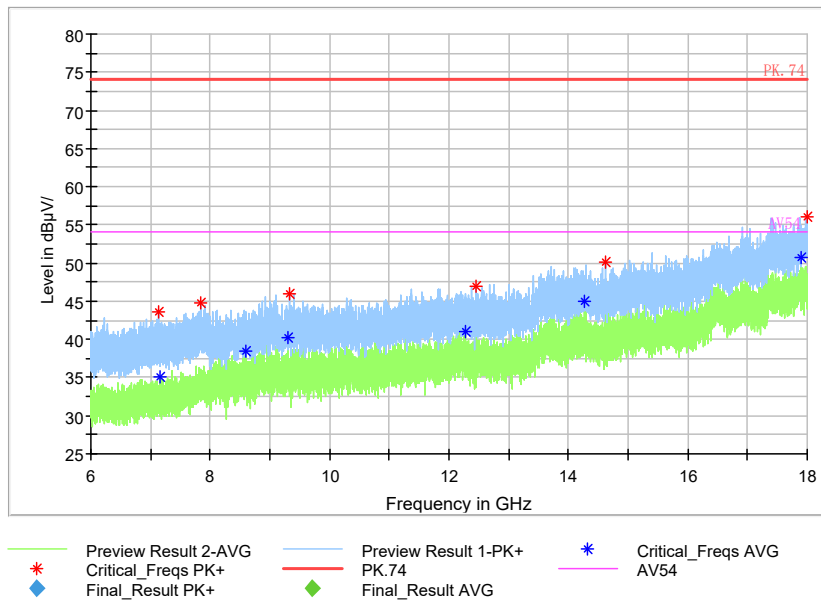


Frequency Range: 6GHz -18GHz
Detector: Av mode and PK mode
Modulation type: 802.11a(Chain1)

Full Spectrum

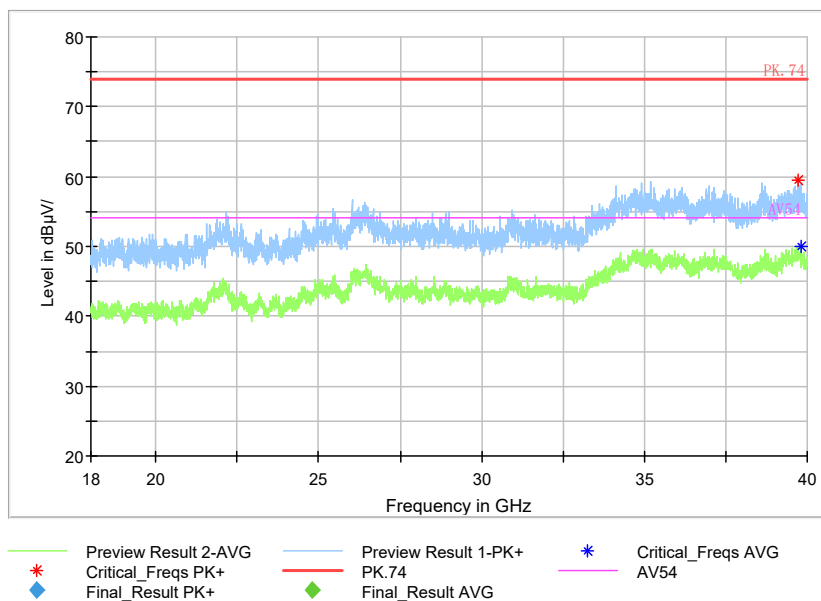


Frequency Range: 18GHz -40GHz
Detector: Av mode and PK mode
Modulation type: 802.11a(Chain1)

Full Spectrum

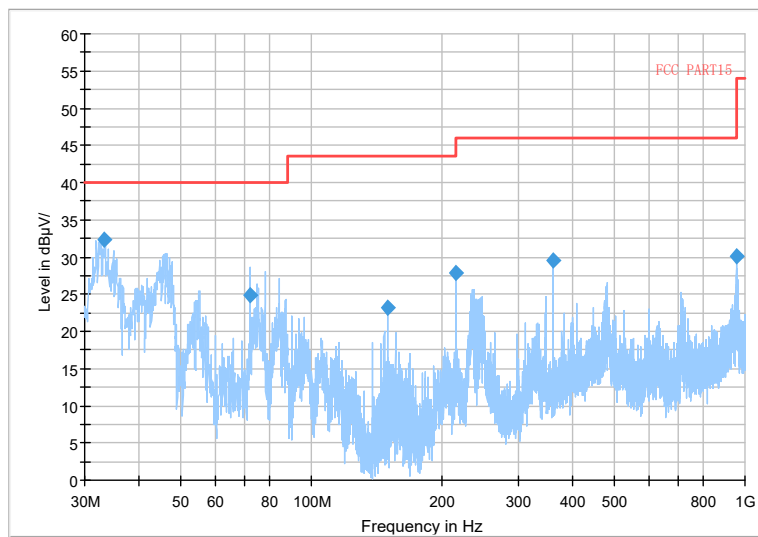

Frequency Range: 30MHz -1GHz
Detector: QP mode
Modulation type: 802.11n(HT20 MIMO)

Full Spectrum

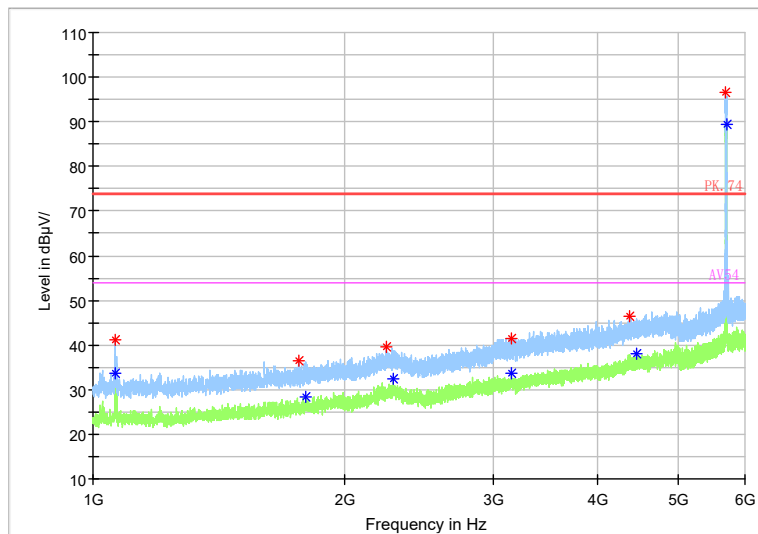

Frequency Range: 1GHz -6GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT20 MIMO)