

# Test Report No.50349162 001

## Appendix D: Radiated and Mains Spurious Emission Data

(File: 50349162 001Appendix D)

### Contents


|                                                |    |
|------------------------------------------------|----|
| Spurious Emissions, Band Edges .....           | 2  |
| Spurious Emissions, TX Mode, 9kHz-30MHz.....   | 38 |
| Spurious Emissions, TX Mode, 30MHz-1GHz.....   | 40 |
| Spurious Emissions, TX Mode, 1GHz-26.5GHz..... | 42 |
| Spurious Emissions, AC Mains .....             | 60 |

## Spurious Emissions, Band Edges


2412MHz, b




TÜV Rheinland Taiwan Ltd.  
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)  
Tel: +886-2172-1000 Fax: +886-2172-1322

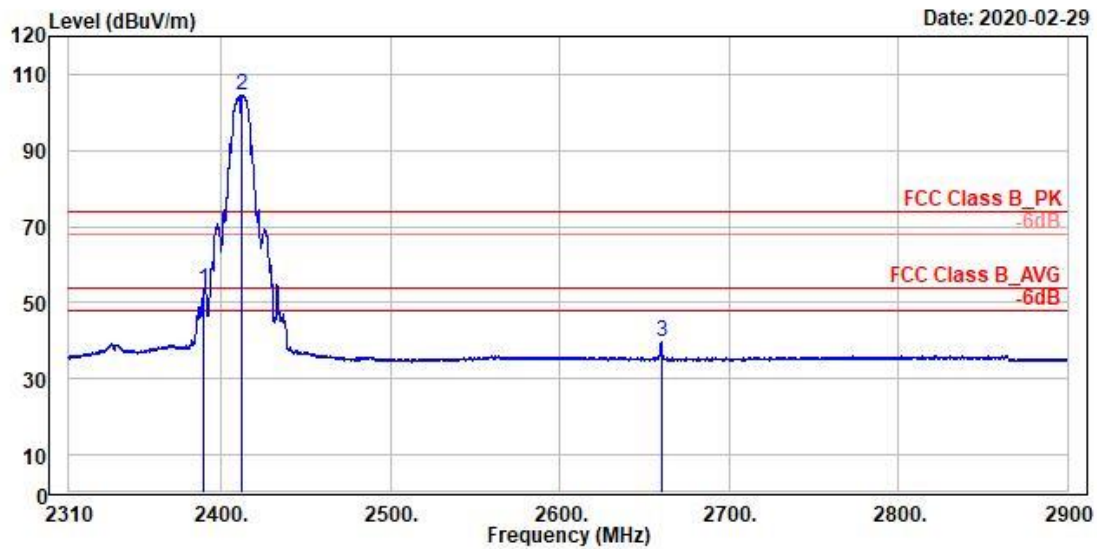


|     | Freq    | Level  | Read Level | Factor | Limit Line | Over Limit | APos | TPos | Remark  | Pol/Phase  |
|-----|---------|--------|------------|--------|------------|------------|------|------|---------|------------|
|     | MHz     | dBuV/m | dBuV       | dB/m   | dBuV/m     | dB         | cm   | deg  |         |            |
| 1 ! | 2390.00 | 53.21  | 15.88      | 37.33  | 54.00      | -0.79      | 282  | 216  | Average | Horizontal |
| 2 * | 2412.00 | 104.54 | 67.14      | 37.40  | 54.00      | 50.54      | 282  | 216  | Average | Horizontal |
| 3   | 2659.99 | 39.55  | 1.71       | 37.84  | 54.00      | -14.45     | 282  | 216  | Average | Horizontal |

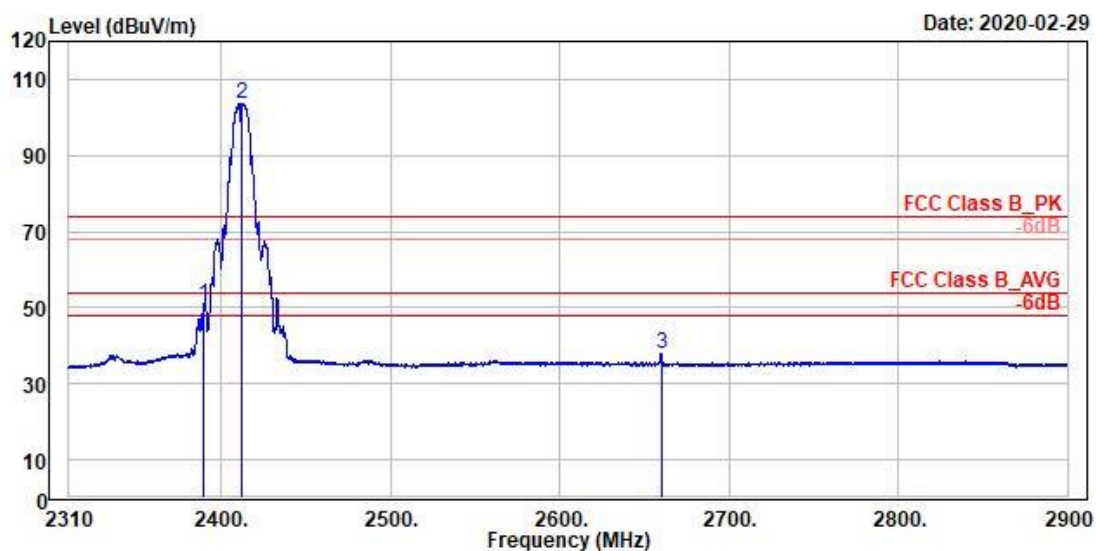


|     | Freq    | Level  | Read Level | Factor | Limit Line | Over Limit | APos | TPos | Remark  | Pol/Phase |
|-----|---------|--------|------------|--------|------------|------------|------|------|---------|-----------|
|     | MHz     | dBuV/m | dBuV       | dB/m   | dBuV/m     | dB         | cm   | deg  |         |           |
| 1 ! | 2390.00 | 50.53  | 13.20      | 37.33  | 54.00      | -3.47      | 222  | 240  | Average | Vertical  |
| 2 * | 2412.00 | 103.79 | 66.39      | 37.40  | 54.00      | 49.79      | 222  | 240  | Average | Vertical  |
| 3   | 2659.99 | 37.77  | -0.07      | 37.84  | 54.00      | -16.23     | 222  | 240  | Average | Vertical  |

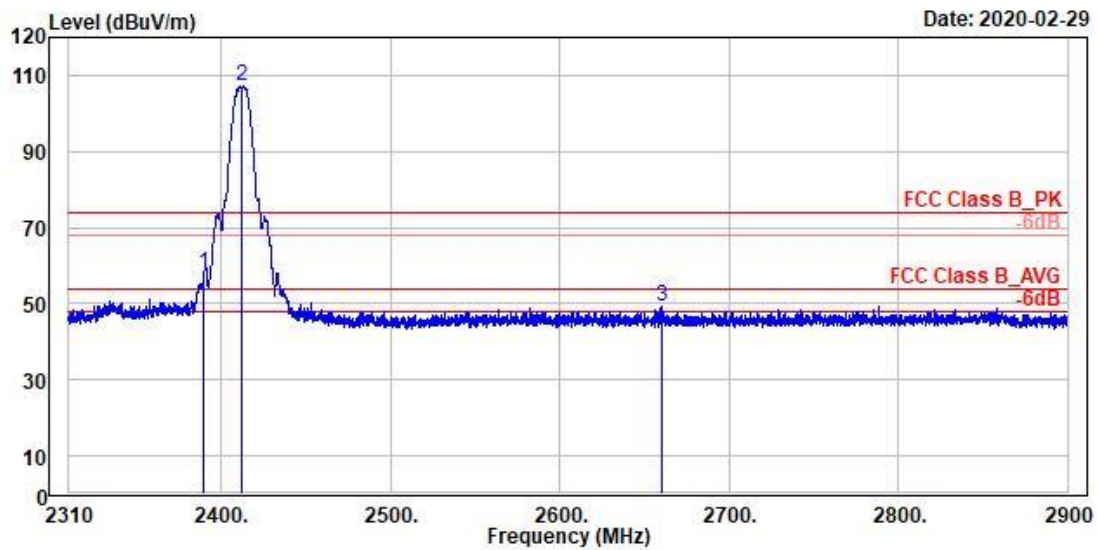


|     | Freq    | Level  | Read Level | Factor | Limit Line | Over Limit | APos | TPos | Remark | Pol/Phase  |
|-----|---------|--------|------------|--------|------------|------------|------|------|--------|------------|
|     | MHz     | dBuV/m | dBuV       | dB/m   | dBuV/m     | dB         | cm   | deg  |        |            |
| 1   | 2390.00 | 57.77  | 20.44      | 37.33  | 74.00      | -16.23     | 282  | 216  | Peak   | Horizontal |
| 2 * | 2412.00 | 107.24 | 69.84      | 37.40  | 74.00      | 33.24      | 282  | 216  | Peak   | Horizontal |
| 3   | 2660.22 | 49.34  | 11.50      | 37.84  | 74.00      | -24.66     | 282  | 216  | Peak   | Horizontal |

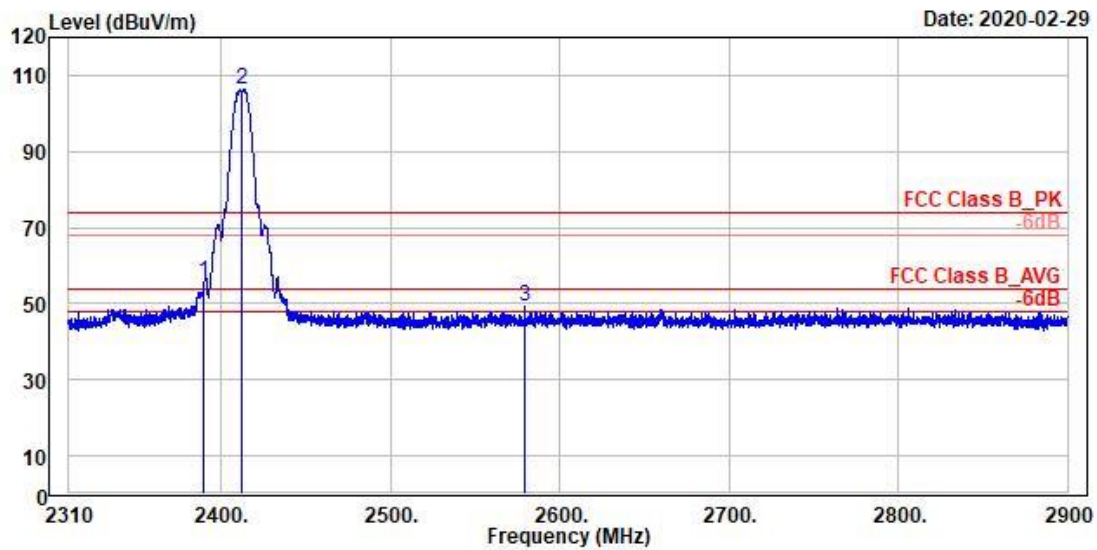


|     | Freq    | Level  | Read Level | Factor | Limit Line | Over Limit | APos | TPos | Remark | Pol/Phase |
|-----|---------|--------|------------|--------|------------|------------|------|------|--------|-----------|
|     | MHz     | dBuV/m | dBuV       | dB/m   | dBuV/m     | dB         | cm   | deg  |        |           |
| 1   | 2390.00 | 55.56  | 18.23      | 37.33  | 74.00      | -18.44     | 222  | 240  | Peak   | Vertical  |
| 2 * | 2412.00 | 106.44 | 69.04      | 37.40  | 74.00      | 32.44      | 222  | 240  | Peak   | Vertical  |
| 3   | 2579.51 | 49.11  | 11.18      | 37.93  | 74.00      | -24.89     | 222  | 240  | Peak   | Vertical  |

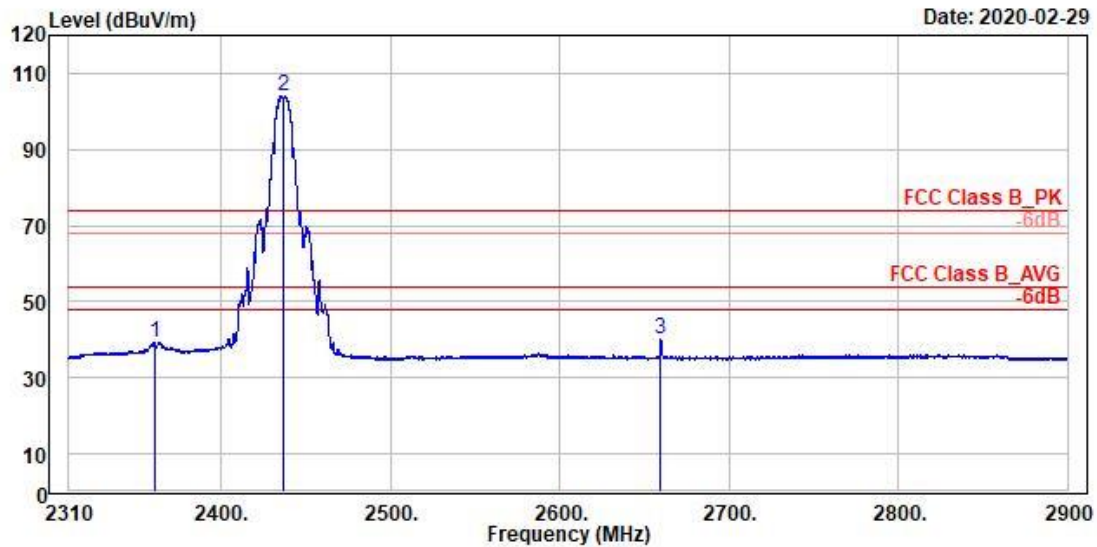


|     | Freq    | Level  | Read<br>Level | Factor | Limit<br>Line | Over<br>Limit | APos | TPos | Remark  | Pol/Phase  |
|-----|---------|--------|---------------|--------|---------------|---------------|------|------|---------|------------|
|     | MHz     | dBuV/m | dBuV          | dB/m   | dBuV/m        | dB            | cm   | deg  |         |            |
| 1   | 2361.09 | 39.26  | 2.02          | 37.24  | 54.00         | -14.74        | 280  | 215  | Average | Horizontal |
| 2 * | 2437.00 | 104.13 | 66.65         | 37.48  | 54.00         | 50.13         | 280  | 215  | Average | Horizontal |
| 3   | 2659.87 | 40.04  | 2.20          | 37.84  | 54.00         | -13.96        | 280  | 215  | Average | Horizontal |

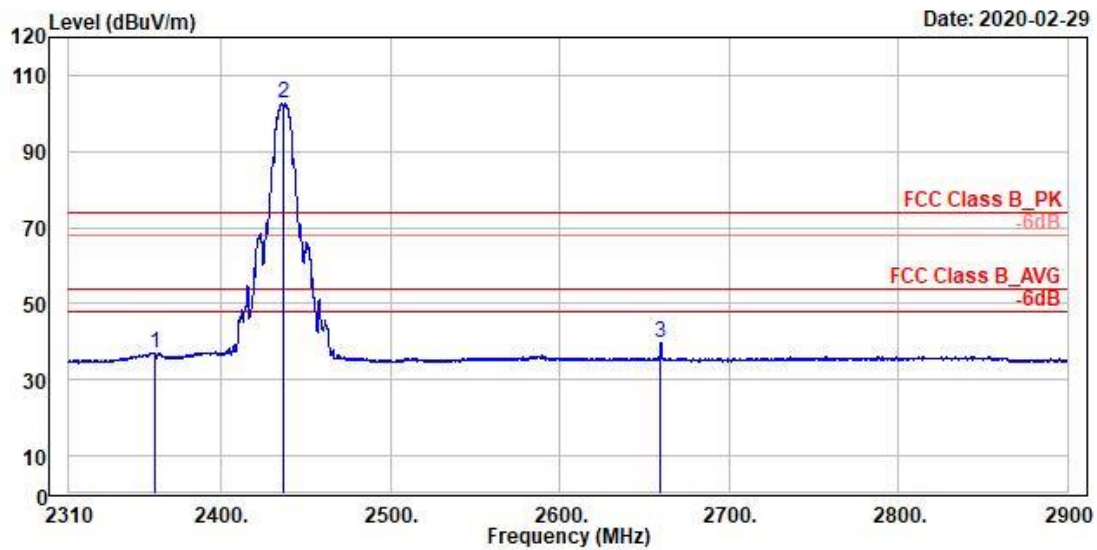


|     | Freq    | Level  | Read Level | Factor | Limit Line | Over Limit | APos | TPos | Remark  | Pol/Phase |
|-----|---------|--------|------------|--------|------------|------------|------|------|---------|-----------|
|     | MHz     | dBuV/m | dBuV       | dB/m   | dBuV/m     | dB         | cm   | deg  |         |           |
| 1   | 2360.39 | 37.16  | -0.08      | 37.24  | 54.00      | -16.84     | 248  | 242  | Average | Vertical  |
| 2 * | 2437.00 | 102.46 | 64.98      | 37.48  | 54.00      | 48.46      | 248  | 242  | Average | Vertical  |
| 3   | 2659.87 | 39.82  | 1.98       | 37.84  | 54.00      | -14.18     | 248  | 242  | Average | Vertical  |

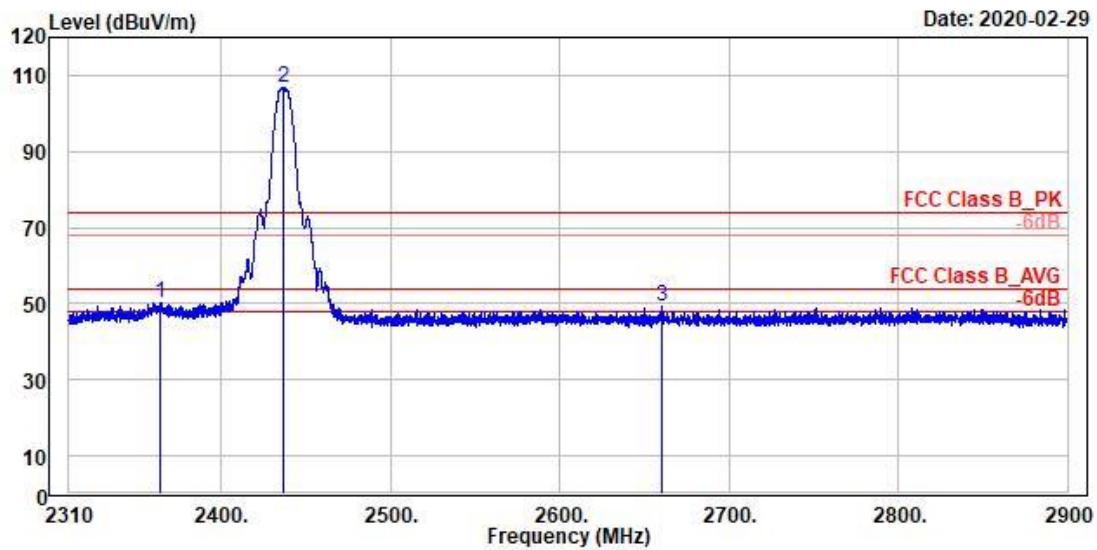


|     | Freq    | Level  | Read Level | Factor | Limit Line | Over Limit | APos | TPos | Remark | Pol/Phase  |
|-----|---------|--------|------------|--------|------------|------------|------|------|--------|------------|
|     | MHz     | dBuV/m | dBuV       | dB/m   | dBuV/m     | dB         | cm   | deg  |        |            |
| 1   | 2363.69 | 50.35  | 13.10      | 37.25  | 74.00      | -23.65     | 280  | 215  | Peak   | Horizontal |
| 2 * | 2437.00 | 106.84 | 69.36      | 37.48  | 74.00      | 32.84      | 280  | 215  | Peak   | Horizontal |
| 3   | 2660.11 | 49.15  | 11.31      | 37.84  | 74.00      | -24.85     | 280  | 215  | Peak   | Horizontal |

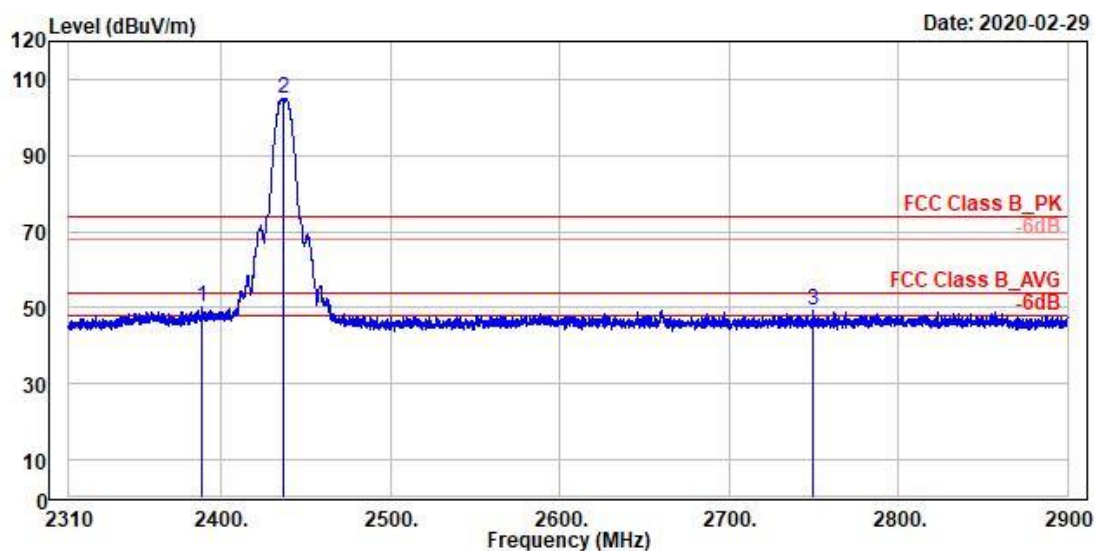


|     | Freq    | Level  | Read Level | Factor | Limit Line | Over Limit | APos | TPos | Remark | Pol/Phase |
|-----|---------|--------|------------|--------|------------|------------|------|------|--------|-----------|
|     | MHz     | dBuV/m | dBuV       | dB/m   | dBuV/m     | dB         | cm   | deg  |        |           |
| 1   | 2388.12 | 50.27  | 12.94      | 37.33  | 74.00      | -23.73     | 248  | 242  | Peak   | Vertical  |
| 2 * | 2437.00 | 105.10 | 67.62      | 37.48  | 74.00      | 31.10      | 248  | 242  | Peak   | Vertical  |
| 3   | 2750.14 | 49.13  | 11.27      | 37.86  | 74.00      | -24.87     | 248  | 242  | Peak   | Vertical  |

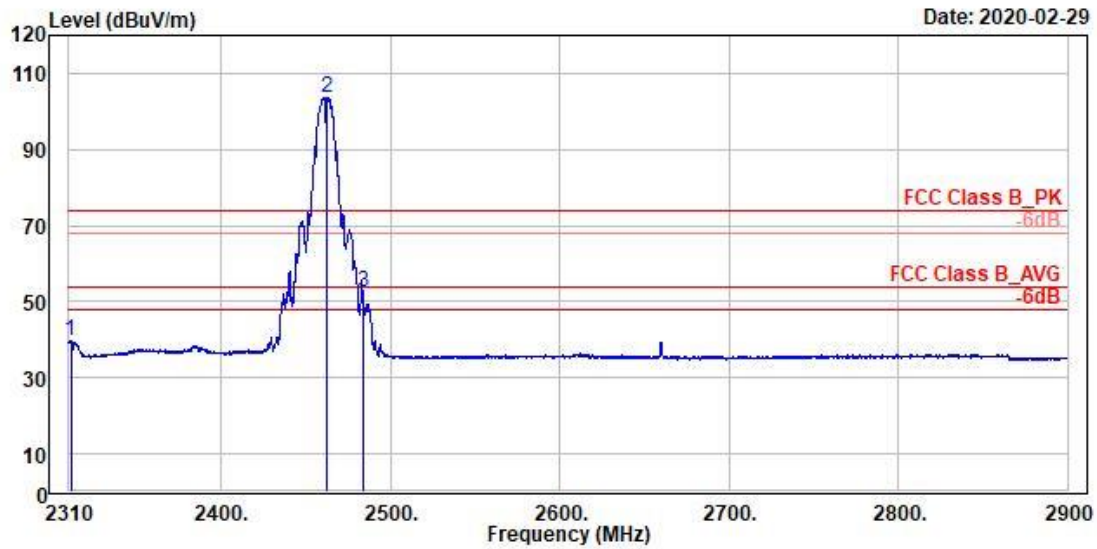


|     | Freq    | Level  | Read<br>Level | Factor | Limit<br>Line | Over<br>Limit | APos | TPos | Remark  | Pol/Phase  |
|-----|---------|--------|---------------|--------|---------------|---------------|------|------|---------|------------|
|     | MHz     | dBuV/m | dBuV          | dB/m   | dBuV/m        | dB            | cm   | deg  |         |            |
| 1   | 2311.06 | 39.67  | 2.59          | 37.08  | 54.00         | -14.33        | 273  | 215  | Average | Horizontal |
| 2 * | 2462.00 | 103.71 | 66.17         | 37.54  | 54.00         | 49.71         | 273  | 215  | Average | Horizontal |
| 3 ! | 2483.50 | 52.63  | 15.07         | 37.56  | 54.00         | -1.37         | 273  | 215  | Average | Horizontal |

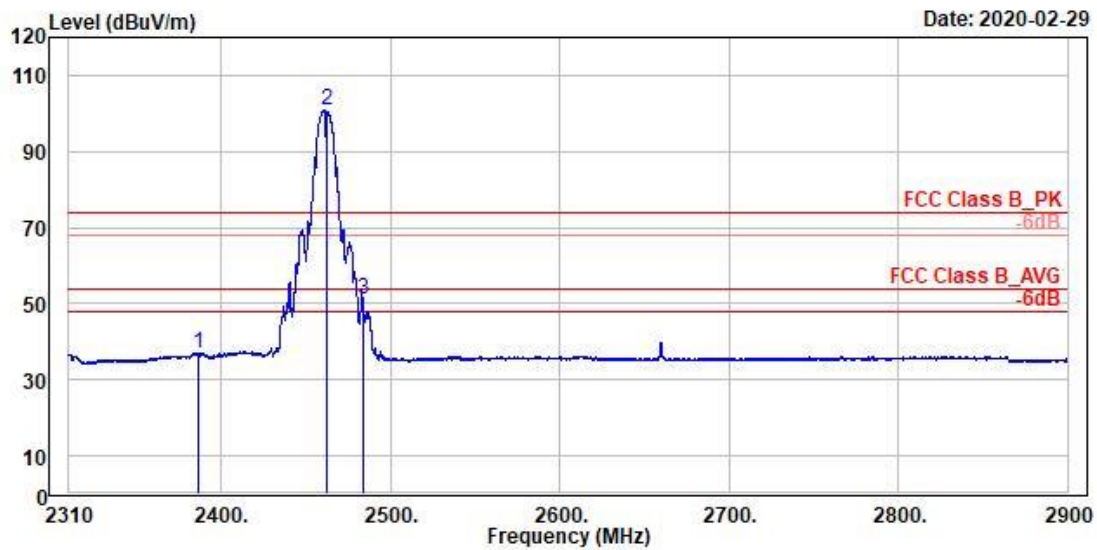


|     | Freq    | Level  | Read Level | Factor | Limit Line | Over Limit | APos | TPos | Remark  | Pol/Phase |
|-----|---------|--------|------------|--------|------------|------------|------|------|---------|-----------|
|     | MHz     | dBuV/m | dBuV       | dB/m   | dBuV/m     | dB         | cm   | deg  |         |           |
| 1   | 2386.23 | 37.07  | -0.25      | 37.32  | 54.00      | -16.93     | 218  | 240  | Average | Vertical  |
| 2 * | 2462.00 | 100.81 | 63.27      | 37.54  | 54.00      | 46.81      | 218  | 240  | Average | Vertical  |
| 3 ! | 2483.50 | 51.02  | 13.46      | 37.56  | 54.00      | -2.98      | 218  | 240  | Average | Vertical  |

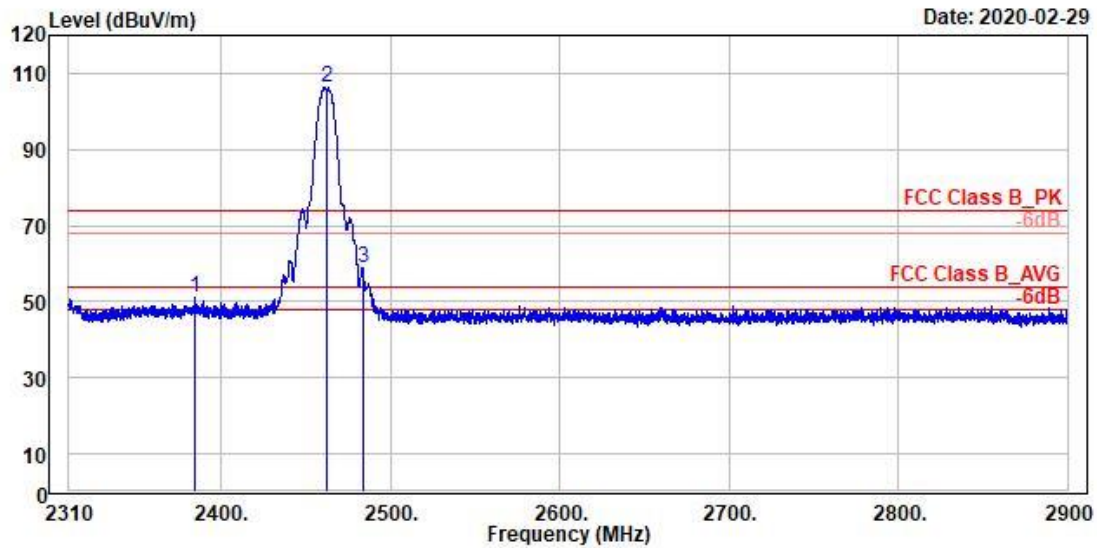


|     | Freq    | Level  | Read Level | Factor | Limit Line | Over Limit | APos | TPos | Remark | Pol/Phase  |
|-----|---------|--------|------------|--------|------------|------------|------|------|--------|------------|
|     | MHz     | dBuV/m | dBuV       | dB/m   | dBuV/m     | dB         | cm   | deg  |        |            |
| 1   | 2384.46 | 50.98  | 13.66      | 37.32  | 74.00      | -23.02     | 273  | 215  | Peak   | Horizontal |
| 2 * | 2462.00 | 106.35 | 68.81      | 37.54  | 74.00      | 32.35      | 273  | 215  | Peak   | Horizontal |
| 3   | 2483.50 | 59.02  | 21.46      | 37.56  | 74.00      | -14.98     | 273  | 215  | Peak   | Horizontal |

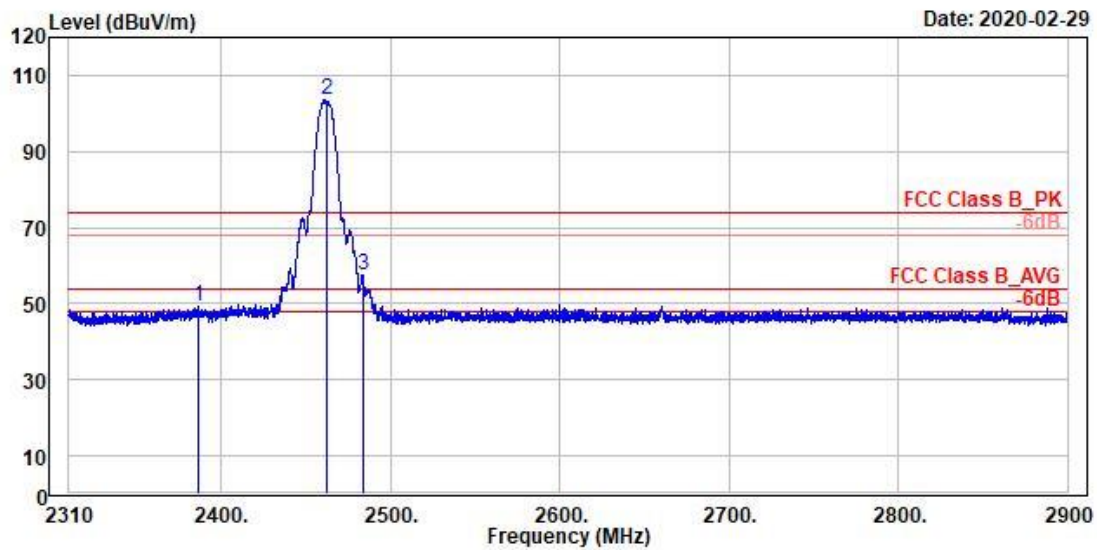


|     | Freq    | Level  | Read Level | Factor | Limit Line | Over Limit | APos | TPos | Remark | Pol/Phase |
|-----|---------|--------|------------|--------|------------|------------|------|------|--------|-----------|
|     | MHz     | dBuV/m | dBuV       | dB/m   | dBuV/m     | dB         | cm   | deg  |        |           |
| 1   | 2385.99 | 49.08  | 11.76      | 37.32  | 74.00      | -24.92     | 218  | 240  | Peak   | Vertical  |
| 2 * | 2462.00 | 103.42 | 65.88      | 37.54  | 74.00      | 29.42      | 218  | 240  | Peak   | Vertical  |
| 3   | 2483.58 | 57.33  | 19.77      | 37.56  | 74.00      | -16.67     | 218  | 240  | Peak   | Vertical  |

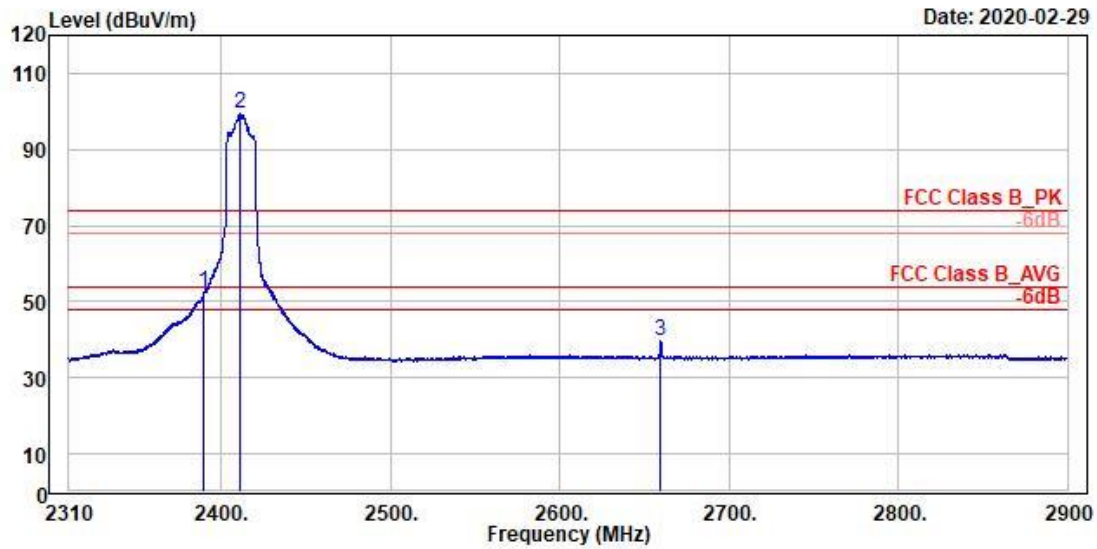


|     | Freq    | Level  | Read<br>Level | Factor | Limit<br>Line | Over<br>Limit | APos | TPos | Remark  | Pol/Phase  |
|-----|---------|--------|---------------|--------|---------------|---------------|------|------|---------|------------|
|     | MHz     | dBuV/m | dBuV          | dB/m   | dBuV/m        | dB            | cm   | deg  |         |            |
| 1 ! | 2389.77 | 52.39  | 15.06         | 37.33  | 54.00         | -1.61         | 282  | 215  | Average | Horizontal |
| 2 * | 2411.13 | 99.49  | 62.09         | 37.40  | 54.00         | 45.49         | 282  | 215  | Average | Horizontal |
| 3   | 2659.87 | 39.66  | 1.82          | 37.84  | 54.00         | -14.34        | 282  | 215  | Average | Horizontal |

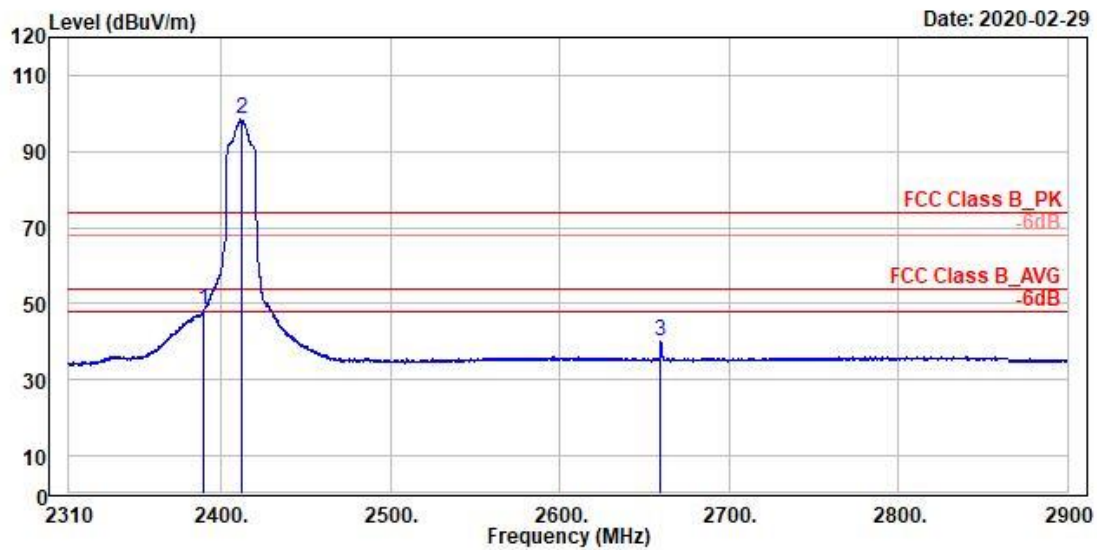


|     | Freq    | Level  | Read Level | Factor | Limit Line | Over Limit | APos | TPos | Remark  | Pol/Phase |
|-----|---------|--------|------------|--------|------------|------------|------|------|---------|-----------|
|     | MHz     | dBuV/m | dBuV       | dB/m   | dBuV/m     | dB         | cm   | deg  |         |           |
| 1 ! | 2390.00 | 48.50  | 11.17      | 37.33  | 54.00      | -5.50      | 222  | 240  | Average | Vertical  |
| 2 * | 2412.00 | 98.52  | 61.12      | 37.40  | 54.00      | 44.52      | 222  | 240  | Average | Vertical  |
| 3   | 2659.87 | 39.97  | 2.13       | 37.84  | 54.00      | -14.03     | 222  | 240  | Average | Vertical  |

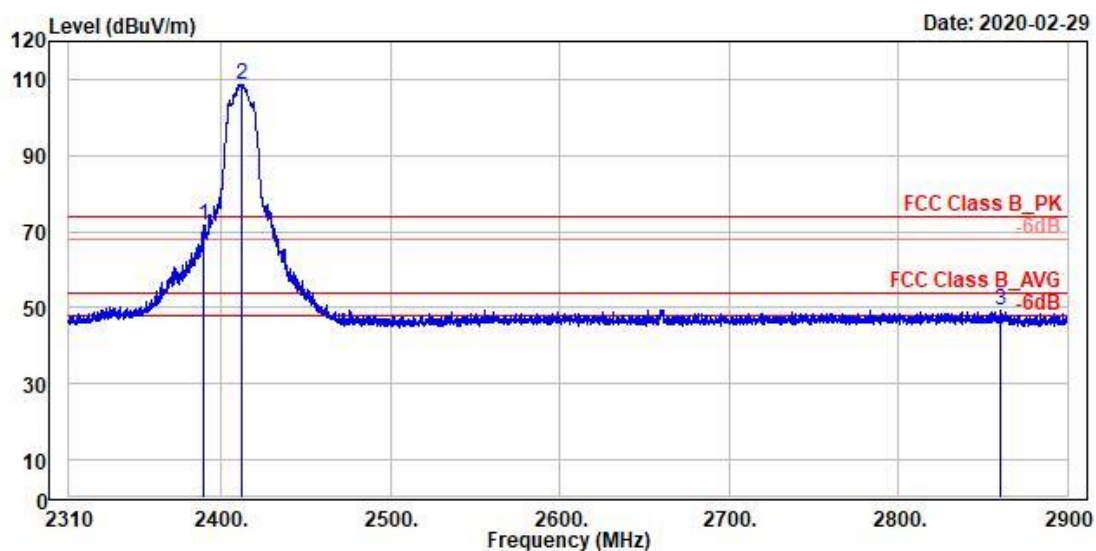


|     | Freq    | Level  | Read Level | Factor | Limit Line | Over Limit | APos | TPos | Remark | Pol/Phase  |
|-----|---------|--------|------------|--------|------------|------------|------|------|--------|------------|
|     | MHz     | dBuV/m | dBuV       | dB/m   | dBuV/m     | dB         | cm   | deg  |        |            |
| 1 ! | 2389.89 | 71.63  | 34.30      | 37.33  | 74.00      | -2.37      | 282  | 215  | Peak   | Horizontal |
| 2 * | 2412.00 | 108.74 | 71.34      | 37.40  | 74.00      | 34.74      | 282  | 215  | Peak   | Horizontal |
| 3   | 2860.82 | 49.41  | 11.29      | 38.12  | 74.00      | -24.59     | 282  | 215  | Peak   | Horizontal |

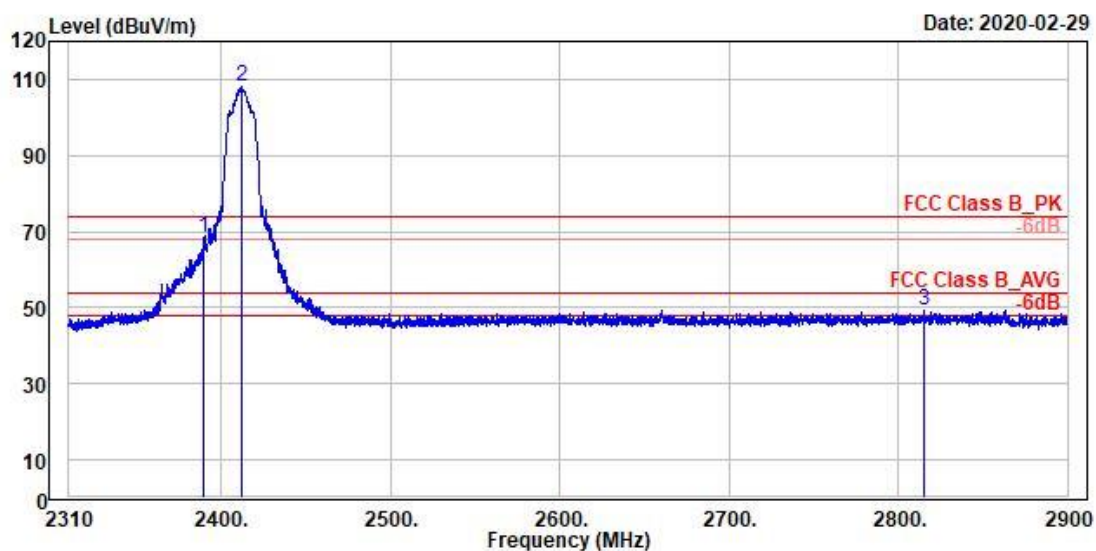


|     | Freq    | Level  | Read Level | Factor | Limit Line | Over Limit | APos | TPos | Remark | Pol/Phase |
|-----|---------|--------|------------|--------|------------|------------|------|------|--------|-----------|
|     | MHz     | dBuV/m | dBuV       | dB/m   | dBuV/m     | dB         | cm   | deg  |        |           |
| 1 ! | 2390.00 | 68.60  | 31.27      | 37.33  | 74.00      | -5.40      | 222  | 240  | Peak   | Vertical  |
| 2 * | 2412.00 | 107.96 | 70.56      | 37.40  | 74.00      | 33.96      | 222  | 240  | Peak   | Vertical  |
| 3   | 2815.63 | 49.16  | 11.20      | 37.96  | 74.00      | -24.84     | 222  | 240  | Peak   | Vertical  |

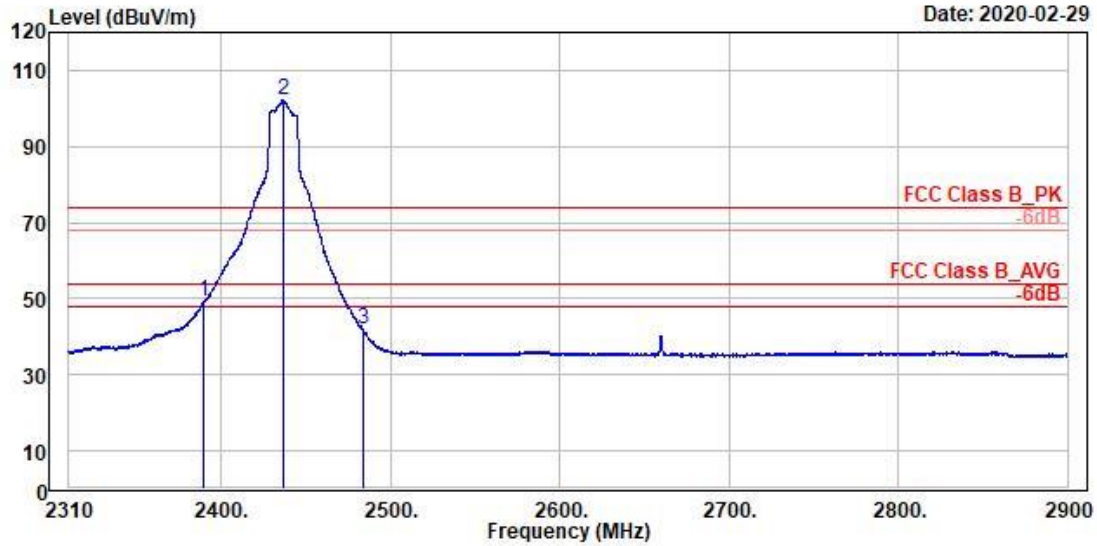


|     | Freq    | Level  | Read Level | Factor | Limit Line | Over Limit | APos | TPos | Remark  | Pol/Phase  |
|-----|---------|--------|------------|--------|------------|------------|------|------|---------|------------|
|     | MHz     | dBuV/m | dBuV       | dB/m   | dBuV/m     | dB         | cm   | deg  |         |            |
| 1 ! | 2389.89 | 49.25  | 11.92      | 37.33  | 54.00      | -4.75      | 280  | 215  | Average | Horizontal |
| 2 * | 2437.00 | 102.33 | 64.85      | 37.48  | 54.00      | 48.33      | 280  | 215  | Average | Horizontal |
| 3   | 2483.50 | 42.06  | 4.50       | 37.56  | 54.00      | -11.94     | 280  | 215  | Average | Horizontal |

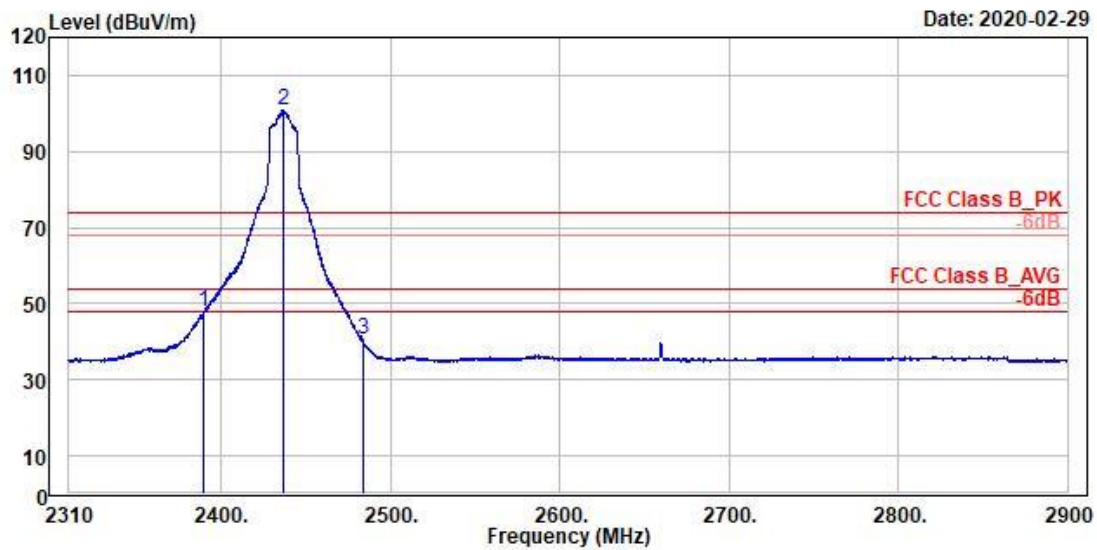


|     | Freq    | Level  | Read Level | Factor | Limit Line | Over Limit | APos | TPos | Remark  | Pol/Phase |
|-----|---------|--------|------------|--------|------------|------------|------|------|---------|-----------|
|     | MHz     | dBuV/m | dBuV       | dB/m   | dBuV/m     | dB         | cm   | deg  |         |           |
| 1 ! | 2389.77 | 48.10  | 10.77      | 37.33  | 54.00      | -5.90      | 248  | 242  | Average | Vertical  |
| 2 * | 2437.00 | 100.98 | 63.50      | 37.48  | 54.00      | 46.98      | 248  | 242  | Average | Vertical  |
| 3   | 2483.50 | 40.42  | 2.86       | 37.56  | 54.00      | -13.58     | 248  | 242  | Average | Vertical  |

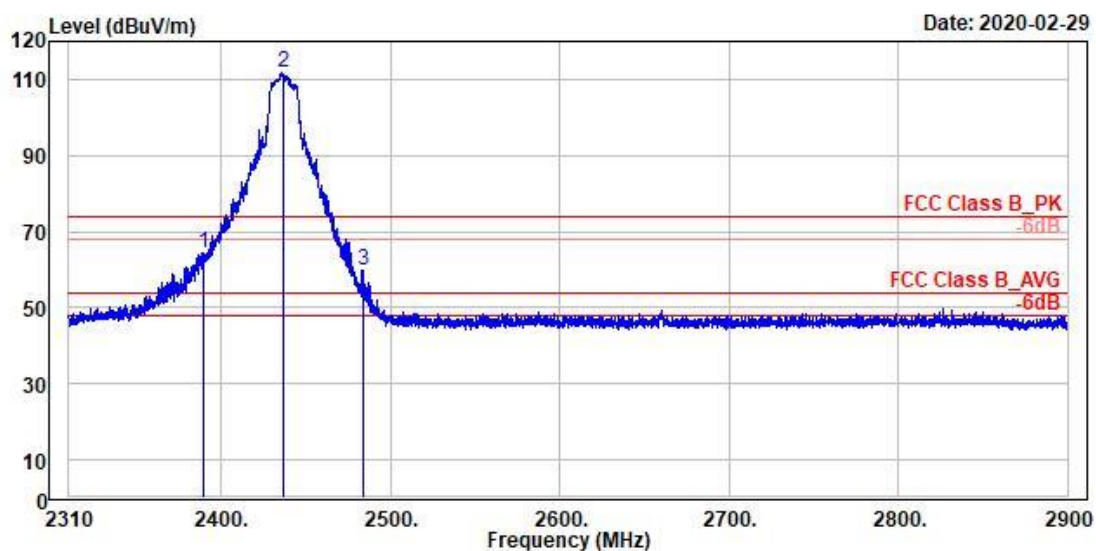


|     | Freq    | Level  | Read Level | Factor | Limit Line | Over Limit | APos | TPos | Remark | Pol/Phase  |
|-----|---------|--------|------------|--------|------------|------------|------|------|--------|------------|
|     | MHz     | dBuV/m | dBuV       | dB/m   | dBuV/m     | dB         | cm   | deg  |        |            |
| 1   | 2390.00 | 64.35  | 27.02      | 37.33  | 74.00      | -9.65      | 280  | 215  | Peak   | Horizontal |
| 2 * | 2437.00 | 111.68 | 74.20      | 37.48  | 74.00      | 37.68      | 280  | 215  | Peak   | Horizontal |
| 3   | 2483.46 | 59.63  | 22.07      | 37.56  | 74.00      | -14.37     | 280  | 215  | Peak   | Horizontal |

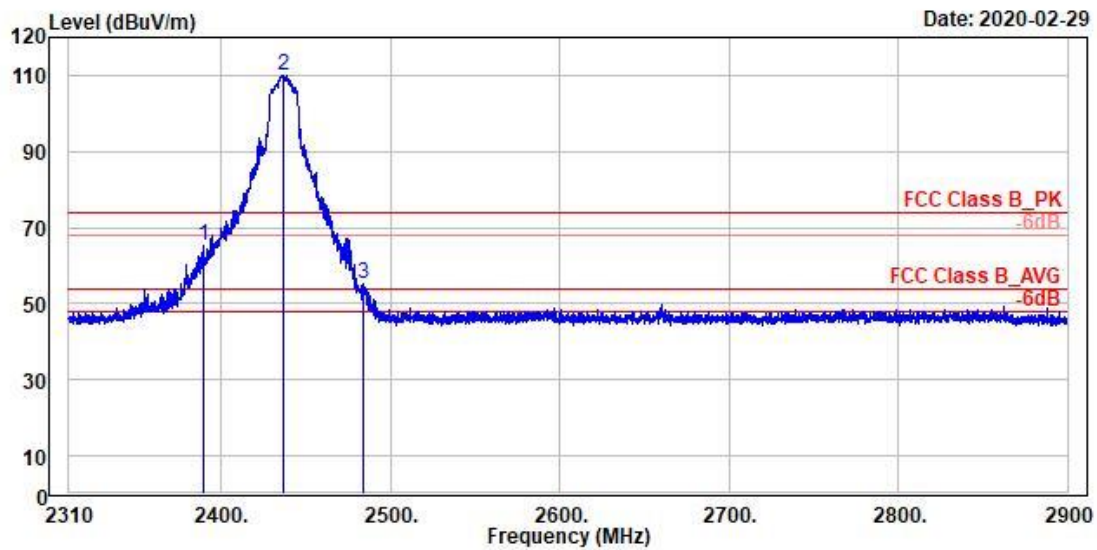


|     | Freq    | Level  | Read Level | Factor | Limit Line | Over Limit | APos | TPos | Remark | Pol/Phase |
|-----|---------|--------|------------|--------|------------|------------|------|------|--------|-----------|
|     | MHz     | dBuV/m | dBuV       | dB/m   | dBuV/m     | dB         | cm   | deg  |        |           |
| 1   | 2389.30 | 65.03  | 27.70      | 37.33  | 74.00      | -8.97      | 248  | 242  | Peak   | Vertical  |
| 2 * | 2437.00 | 110.14 | 72.66      | 37.48  | 74.00      | 36.14      | 248  | 242  | Peak   | Vertical  |
| 3   | 2484.05 | 55.22  | 17.66      | 37.56  | 74.00      | -18.78     | 248  | 242  | Peak   | Vertical  |

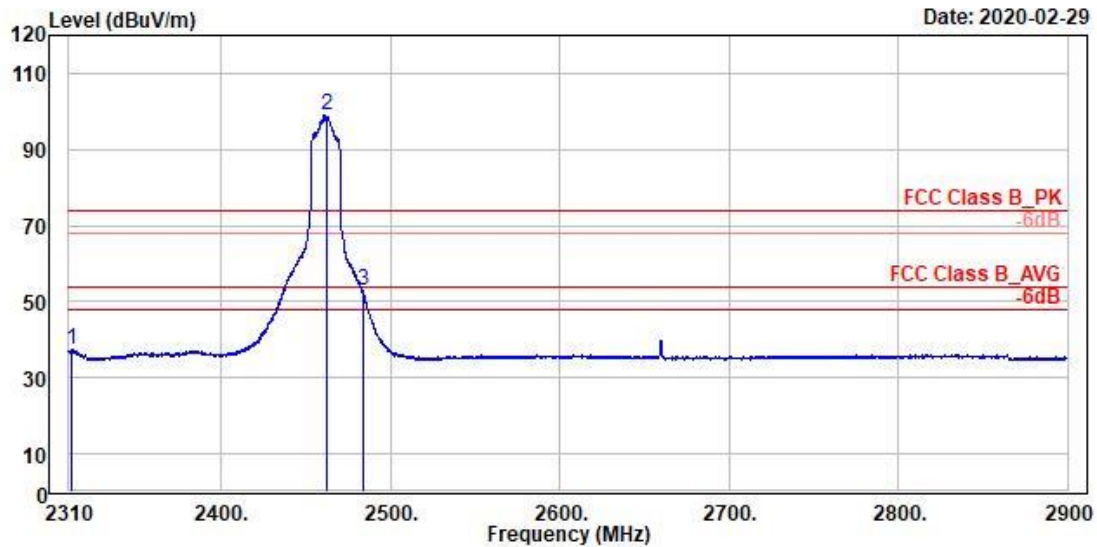


|     | Freq    | Level  | Read<br>Level | Factor | Limit<br>Line | Over<br>Limit | APos | TPos | Remark  | Pol/Phase  |
|-----|---------|--------|---------------|--------|---------------|---------------|------|------|---------|------------|
|     | MHz     | dBuV/m | dBuV          | dB/m   | dBuV/m        | dB            | cm   | deg  |         |            |
| 1   | 2311.42 | 37.43  | 0.35          | 37.08  | 54.00         | -16.57        | 273  | 215  | Average | Horizontal |
| 2 * | 2462.00 | 99.20  | 61.66         | 37.54  | 54.00         | 45.20         | 273  | 215  | Average | Horizontal |
| 3 ! | 2483.50 | 52.89  | 15.33         | 37.56  | 54.00         | -1.11         | 273  | 215  | Average | Horizontal |

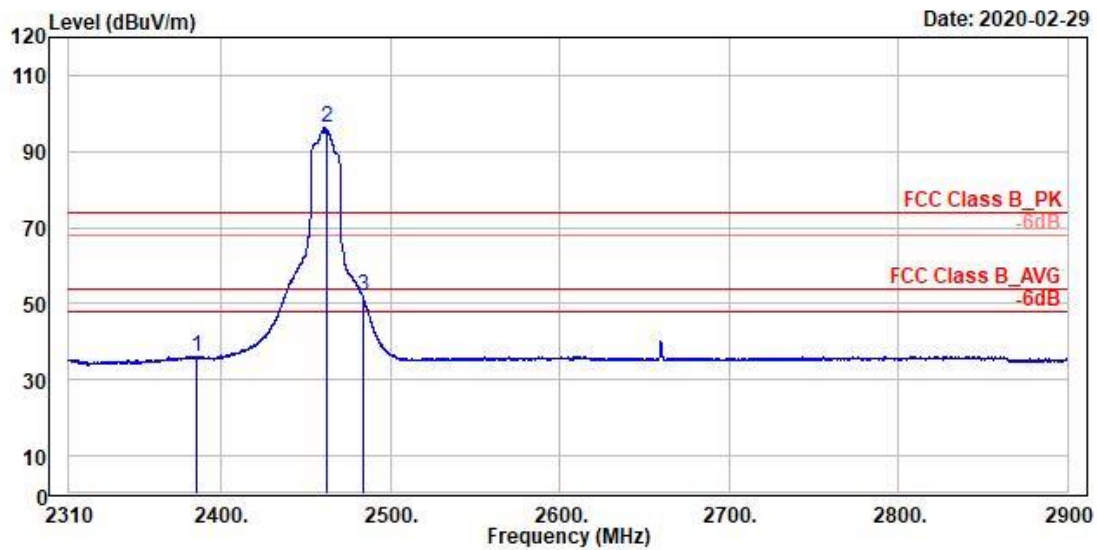


|     | Freq    | Level  | Read Level | Factor | Limit Line | Over Limit | APos | TPos | Remark  | Pol/Phase |
|-----|---------|--------|------------|--------|------------|------------|------|------|---------|-----------|
|     | MHz     | dBuV/m | dBuV       | dB/m   | dBuV/m     | dB         | cm   | deg  |         |           |
| 1   | 2385.64 | 36.10  | -1.22      | 37.32  | 54.00      | -17.90     | 218  | 240  | Average | Vertical  |
| 2 * | 2462.00 | 96.49  | 58.95      | 37.54  | 54.00      | 42.49      | 218  | 240  | Average | Vertical  |
| 3 ! | 2483.50 | 52.13  | 14.57      | 37.56  | 54.00      | -1.87      | 218  | 240  | Average | Vertical  |

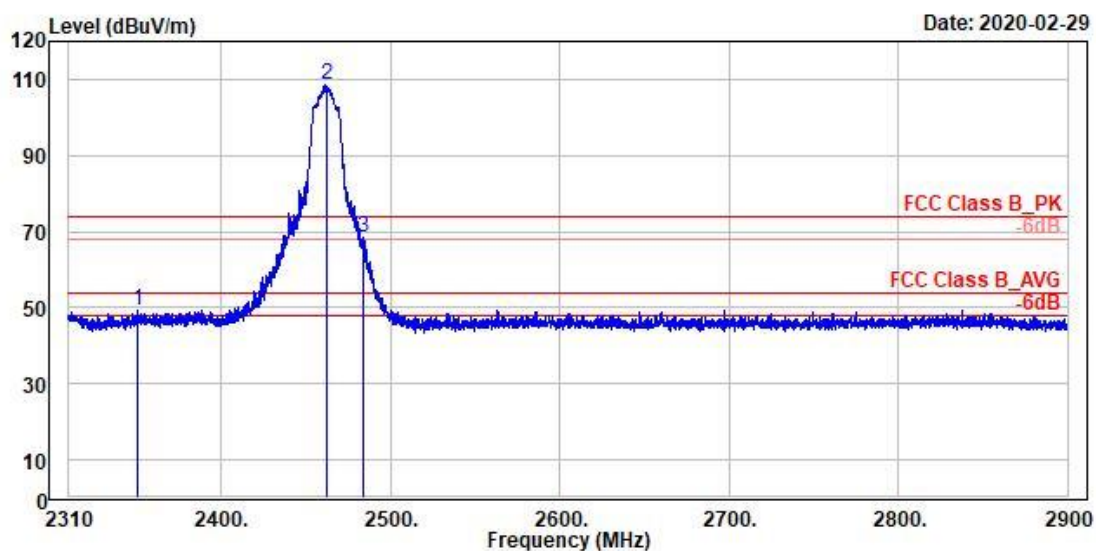


|     | Freq    | Level  | Read Level | Factor | Limit Line | Over Limit | APos | TPos | Remark | Pol/Phase  |
|-----|---------|--------|------------|--------|------------|------------|------|------|--------|------------|
|     | MHz     | dBuV/m | dBuV       | dB/m   | dBuV/m     | dB         | cm   | deg  |        |            |
| 1   | 2350.95 | 49.36  | 12.15      | 37.21  | 74.00      | -24.64     | 273  | 215  | Peak   | Horizontal |
| 2 * | 2462.00 | 108.39 | 70.85      | 37.54  | 74.00      | 34.39      | 273  | 215  | Peak   | Horizontal |
| 3 ! | 2484.29 | 68.45  | 30.89      | 37.56  | 74.00      | -5.55      | 273  | 215  | Peak   | Horizontal |

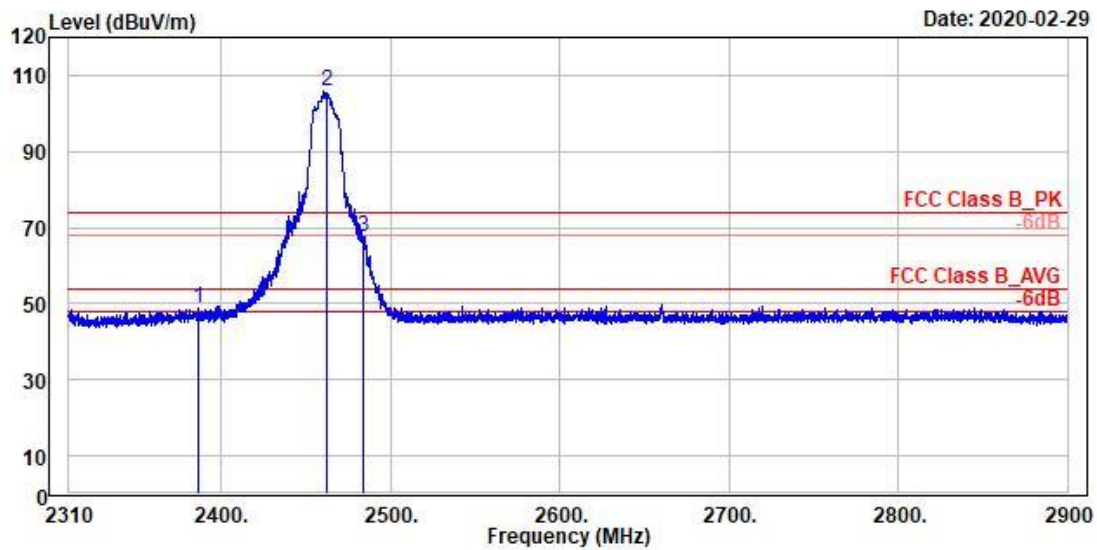


|     | Freq    | Level  | Read Level | Factor | Limit Line | Over Limit | APos | TPos | Remark | Pol/Phase |
|-----|---------|--------|------------|--------|------------|------------|------|------|--------|-----------|
|     | MHz     | dBuV/m | dBuV       | dB/m   | dBuV/m     | dB         | cm   | deg  |        |           |
| 1   | 2386.82 | 48.90  | 11.58      | 37.32  | 74.00      | -25.10     | 218  | 240  | Peak   | Vertical  |
| 2 * | 2462.00 | 105.73 | 68.19      | 37.54  | 74.00      | 31.73      | 218  | 240  | Peak   | Vertical  |
| 3   | 2484.05 | 67.63  | 30.07      | 37.56  | 74.00      | -6.37      | 218  | 240  | Peak   | Vertical  |

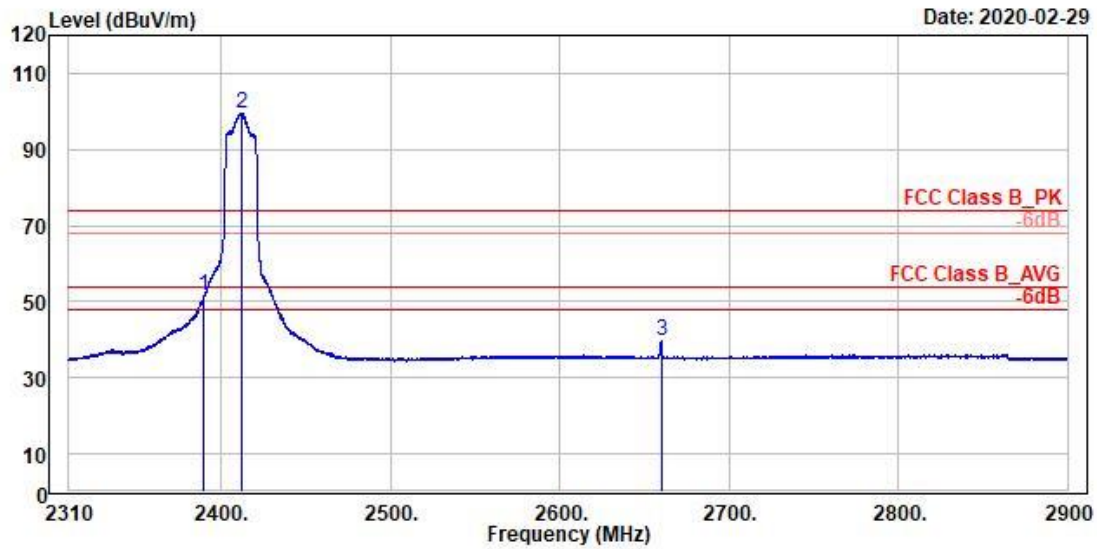


|     | Freq    | Level  | Read Level | Factor | Limit Line | Over Limit | APos | TPos | Remark  | Pol/Phase  |
|-----|---------|--------|------------|--------|------------|------------|------|------|---------|------------|
|     | MHz     | dBuV/m | dBuV       | dB/m   | dBuV/m     | dB         | cm   | deg  |         |            |
| 1 ! | 2390.00 | 51.36  | 14.03      | 37.33  | 54.00      | -2.64      | 282  | 215  | Average | Horizontal |
| 2 * | 2412.00 | 99.48  | 62.08      | 37.40  | 54.00      | 45.48      | 282  | 215  | Average | Horizontal |
| 3   | 2659.99 | 39.50  | 1.66       | 37.84  | 54.00      | -14.50     | 282  | 215  | Average | Horizontal |

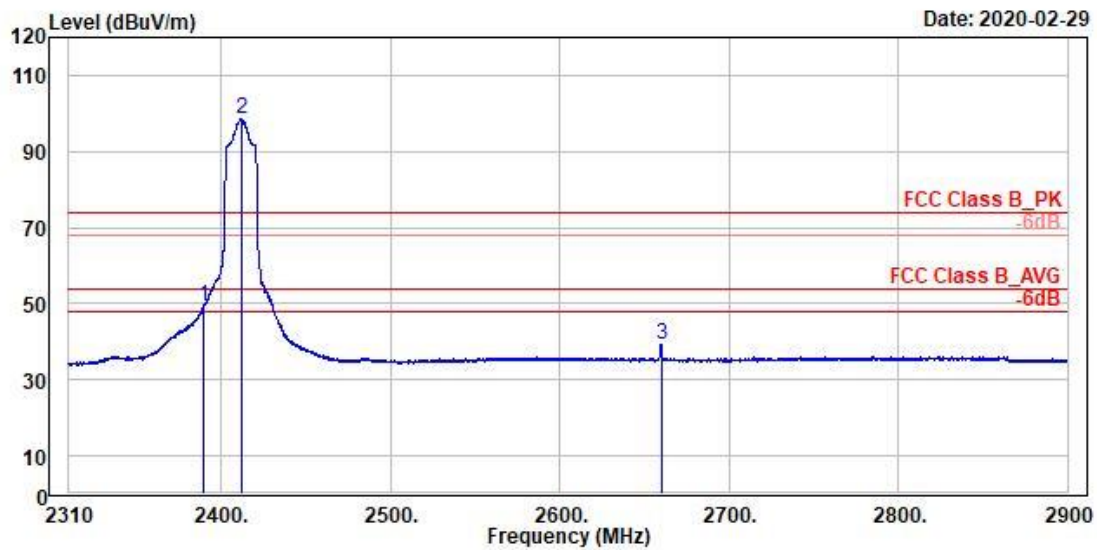

|     | Freq    | Level  | Read Level | Factor | Limit Line | Over Limit | APos | TPos | Remark  | Pol/Phase |
|-----|---------|--------|------------|--------|------------|------------|------|------|---------|-----------|
|     | MHz     | dBuV/m | dBuV       | dB/m   | dBuV/m     | dB         | cm   | deg  |         |           |
| 1 ! | 2389.89 | 49.21  | 11.88      | 37.33  | 54.00      | -4.79      | 222  | 240  | Average | Vertical  |
| 2 * | 2412.00 | 98.70  | 61.30      | 37.40  | 54.00      | 44.70      | 222  | 240  | Average | Vertical  |
| 3   | 2659.99 | 39.35  | 1.51       | 37.84  | 54.00      | -14.65     | 222  | 240  | Average | Vertical  |

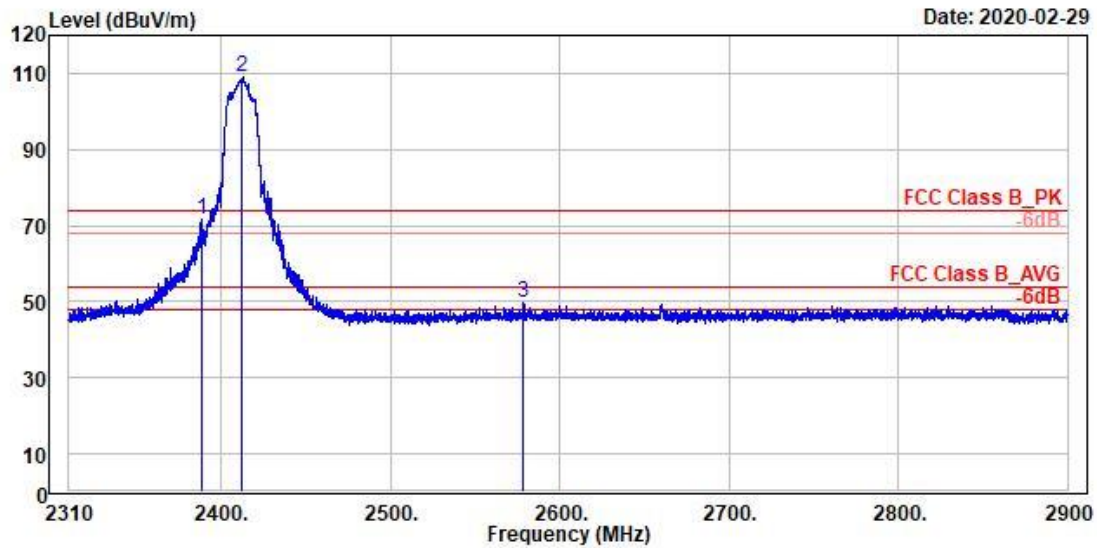


|     | Freq    | Level  | Read Level | Factor | Limit Line | Over Limit | APos | TPos | Remark | Pol/Phase  |
|-----|---------|--------|------------|--------|------------|------------|------|------|--------|------------|
|     | MHz     | dBuV/m | dBuV       | dB/m   | dBuV/m     | dB         | cm   | deg  |        |            |
| 1 ! | 2388.59 | 71.81  | 34.48      | 37.33  | 74.00      | -2.19      | 282  | 215  | Peak   | Horizontal |
| 2 * | 2412.00 | 109.17 | 71.77      | 37.40  | 74.00      | 35.17      | 282  | 215  | Peak   | Horizontal |
| 3   | 2578.80 | 49.62  | 11.69      | 37.93  | 74.00      | -24.38     | 282  | 215  | Peak   | Horizontal |

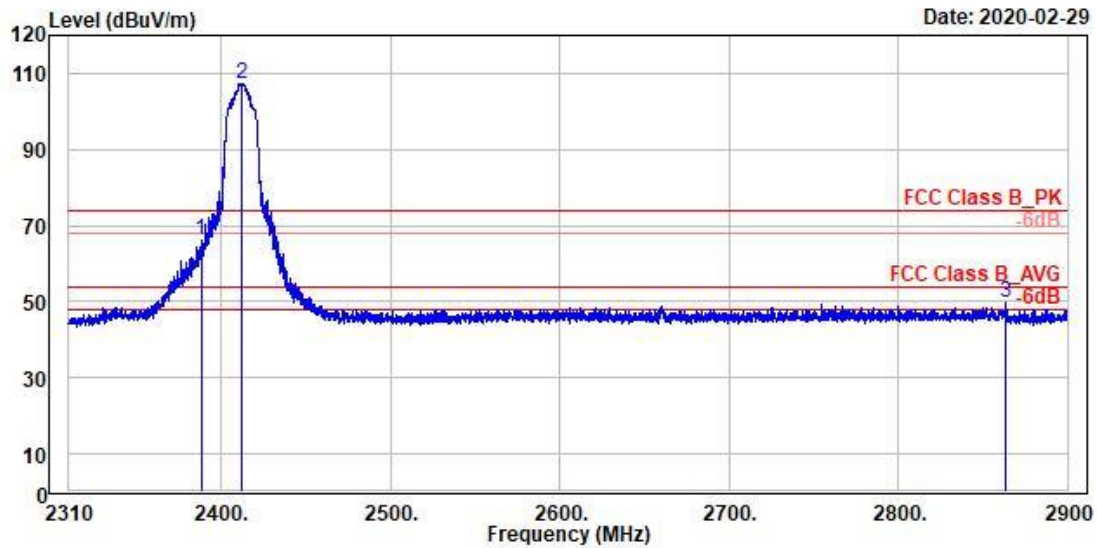


|     | Freq    | Level  | Read Level | Factor | Limit Line | Over Limit | APos | TPos | Remark | Pol/Phase |
|-----|---------|--------|------------|--------|------------|------------|------|------|--------|-----------|
|     | MHz     | dBuV/m | dBuV       | dB/m   | dBuV/m     | dB         | cm   | deg  |        |           |
| 1   | 2388.00 | 66.20  | 28.87      | 37.33  | 74.00      | -7.80      | 222  | 240  | Peak   | Vertical  |
| 2 * | 2412.00 | 107.35 | 69.95      | 37.40  | 74.00      | 33.35      | 222  | 240  | Peak   | Vertical  |
| 3   | 2863.54 | 49.71  | 11.58      | 38.13  | 74.00      | -24.29     | 222  | 240  | Peak   | Vertical  |




TÜV Rheinland Taiwan Ltd.  
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)  
Tel:+886-2172-1000 Fax:+886-2172-1322

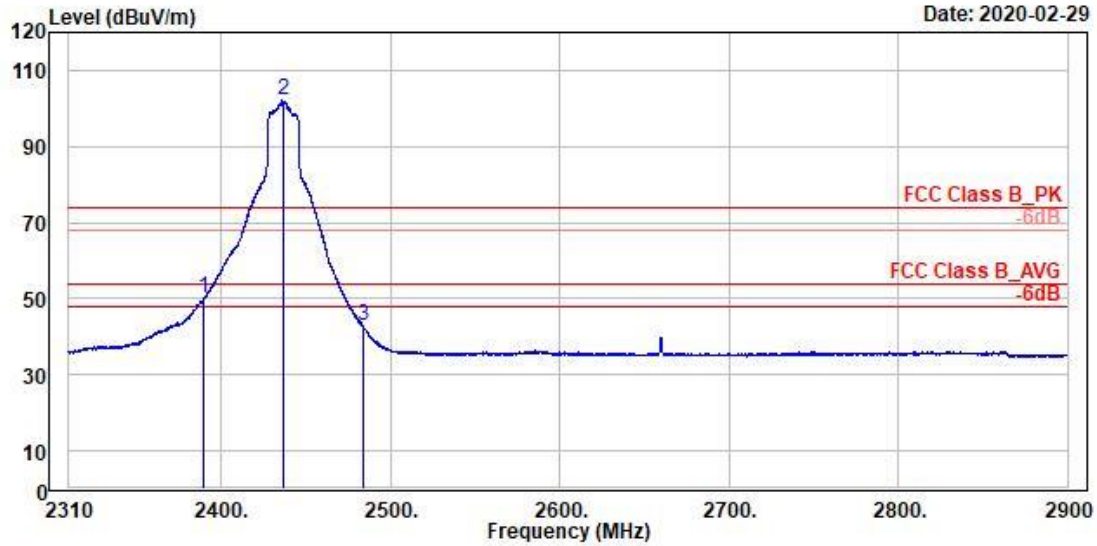


|     | Freq    | Level  | Read Level | Factor | Limit Line | Over Limit | APos | TPos | Remark | Pol/Phase  |
|-----|---------|--------|------------|--------|------------|------------|------|------|--------|------------|
|     | MHz     | dBuV/m | dBuV       | dB/m   | dBuV/m     | dB         | cm   | deg  |        |            |
| 1   | 2390.00 | 50.21  | 12.88      | 37.33  | 74.00      | -23.79     | 280  | 215  | Peak   | Horizontal |
| 2 * | 2437.00 | 102.01 | 64.53      | 37.48  | 74.00      | 28.01      | 280  | 215  | Peak   | Horizontal |
| 3   | 2483.58 | 42.84  | 5.28       | 37.56  | 74.00      | -31.16     | 280  | 215  | Peak   | Horizontal |

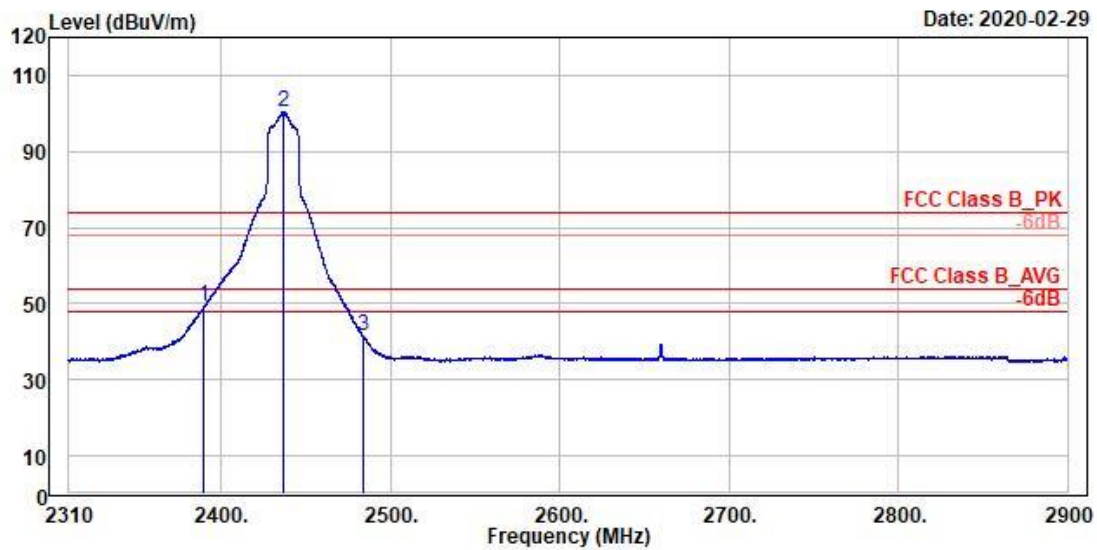


|     | Freq    | Level  | Read Level | Factor | Limit Line | Over Limit | APos | TPos | Remark  | Pol/Phase |
|-----|---------|--------|------------|--------|------------|------------|------|------|---------|-----------|
|     | MHz     | dBuV/m | dBuV       | dB/m   | dBuV/m     | dB         | cm   | deg  |         |           |
| 1 ! | 2389.77 | 49.14  | 11.81      | 37.33  | 54.00      | -4.86      | 248  | 242  | Average | Vertical  |
| 2 * | 2437.00 | 100.36 | 62.88      | 37.48  | 54.00      | 46.36      | 248  | 242  | Average | Vertical  |
| 3   | 2483.58 | 41.70  | 4.14       | 37.56  | 54.00      | -12.30     | 248  | 242  | Average | Vertical  |

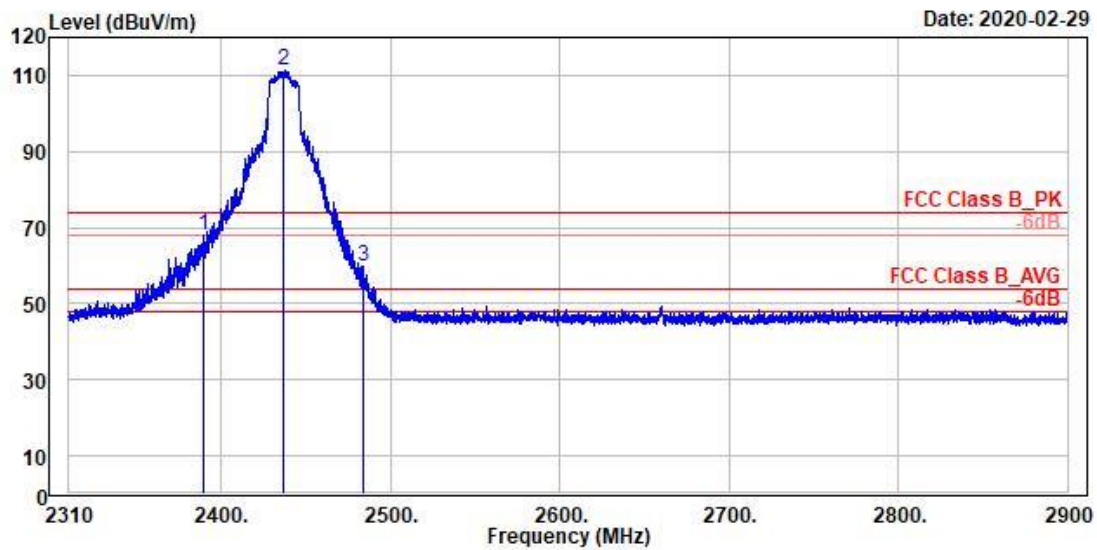


|     | Freq    | Level  | Read Level | Factor | Limit Line | Over Limit | APos | TPos | Remark | Pol/Phase  |
|-----|---------|--------|------------|--------|------------|------------|------|------|--------|------------|
|     | MHz     | dBuV/m | dBuV       | dB/m   | dBuV/m     | dB         | cm   | deg  |        |            |
| 1   | 2389.41 | 67.97  | 30.64      | 37.33  | 74.00      | -6.03      | 280  | 215  | Peak   | Horizontal |
| 2 * | 2437.00 | 111.19 | 73.71      | 37.48  | 74.00      | 37.19      | 280  | 215  | Peak   | Horizontal |
| 3   | 2483.58 | 59.82  | 22.26      | 37.56  | 74.00      | -14.18     | 280  | 215  | Peak   | Horizontal |

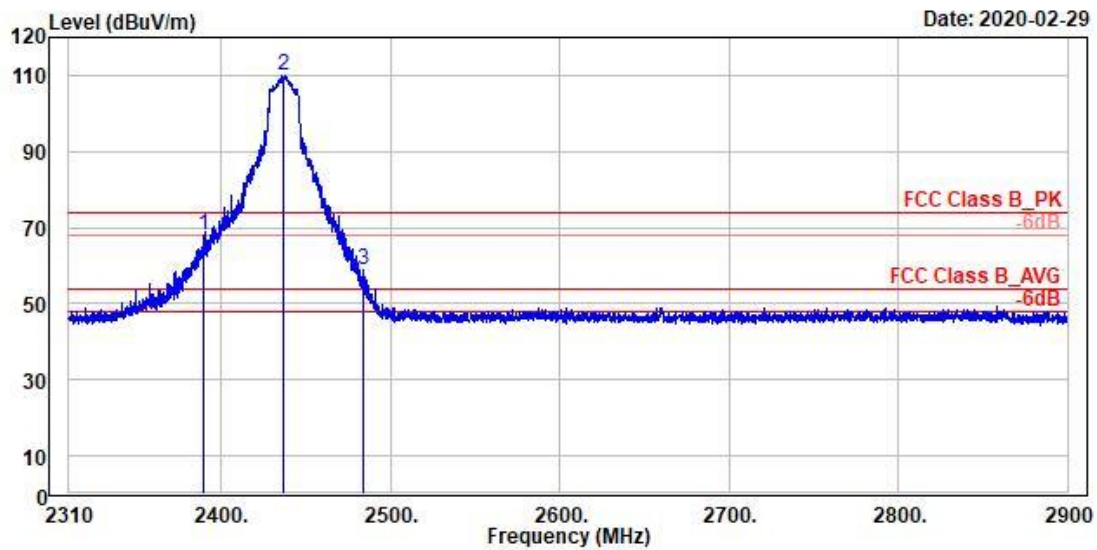


|     | Freq    | Level  | Read Level | Factor | Limit Line | Over Limit | APos | TPos | Remark | Pol/Phase |
|-----|---------|--------|------------|--------|------------|------------|------|------|--------|-----------|
|     | MHz     | dBuV/m | dBuV       | dB/m   | dBuV/m     | dB         | cm   | deg  |        |           |
| 1 ! | 2389.65 | 68.10  | 30.77      | 37.33  | 74.00      | -5.90      | 248  | 242  | Peak   | Vertical  |
| 2 * | 2437.00 | 110.06 | 72.58      | 37.48  | 74.00      | 36.06      | 248  | 242  | Peak   | Vertical  |
| 3   | 2483.50 | 59.06  | 21.50      | 37.56  | 74.00      | -14.94     | 248  | 242  | Peak   | Vertical  |

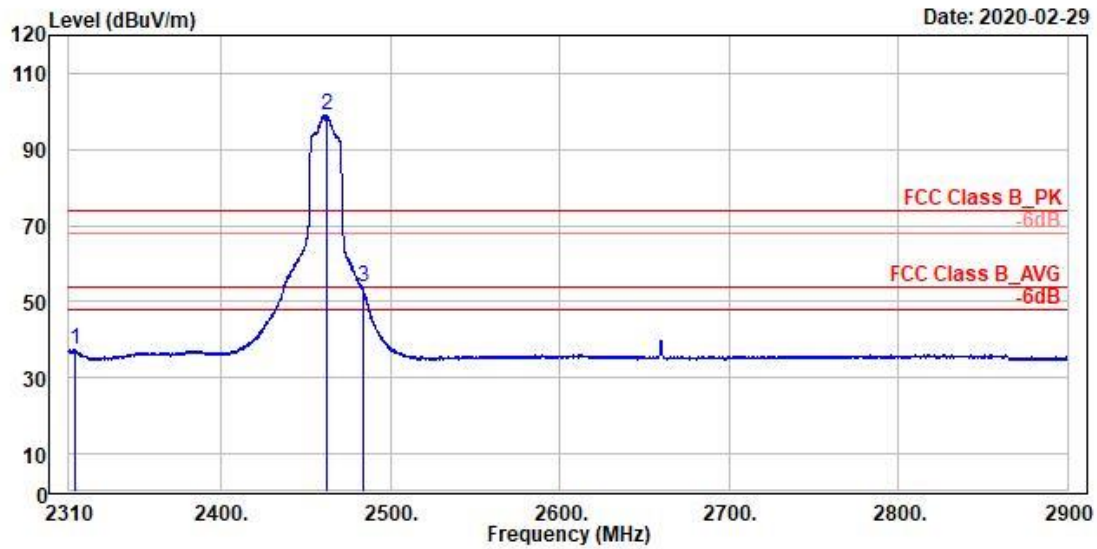


|     | Freq    | Level  | Read<br>Level | Factor | Limit<br>Line | Over<br>Limit | APos | TPos | Remark  | Pol/Phase  |
|-----|---------|--------|---------------|--------|---------------|---------------|------|------|---------|------------|
|     | MHz     | dBuV/m | dBuV          | dB/m   | dBuV/m        | dB            | cm   | deg  |         |            |
| 1   | 2313.30 | 37.27  | 0.18          | 37.09  | 54.00         | -16.73        | 273  | 215  | Average | Horizontal |
| 2 * | 2462.00 | 99.22  | 61.68         | 37.54  | 54.00         | 45.22         | 273  | 215  | Average | Horizontal |
| 3 ! | 2483.50 | 53.66  | 16.10         | 37.56  | 54.00         | -0.34         | 273  | 215  | Average | Horizontal |

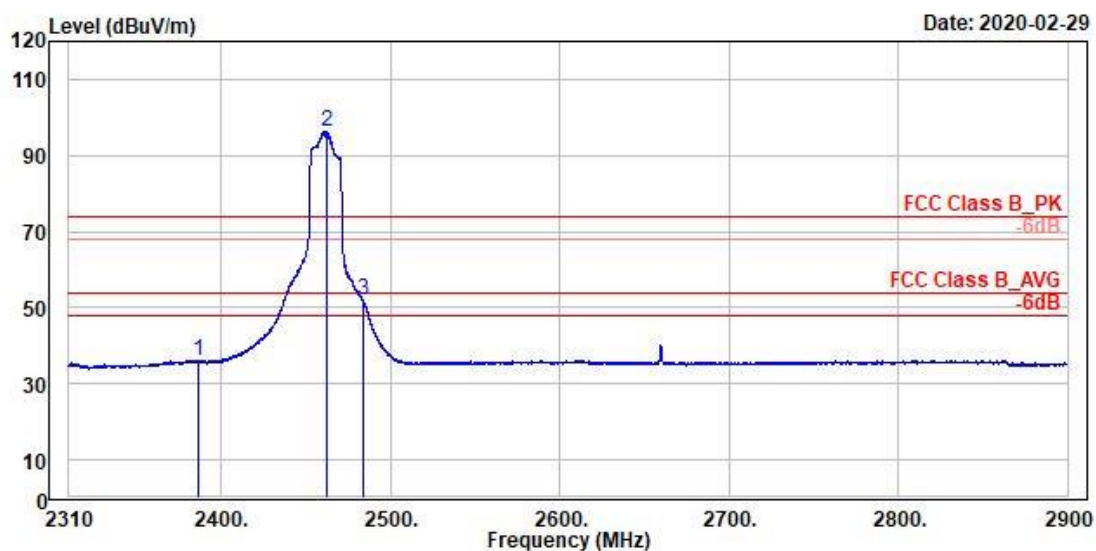

|     | Freq    | Level  | Read Level | Factor | Limit Line | Over Limit | APos | TPos | Remark  | Pol/Phase |
|-----|---------|--------|------------|--------|------------|------------|------|------|---------|-----------|
|     | MHz     | dBuV/m | dBuV       | dB/m   | dBuV/m     | dB         | cm   | deg  |         |           |
| 1   | 2386.11 | 36.14  | -1.18      | 37.32  | 54.00      | -17.86     | 218  | 240  | Average | Vertical  |
| 2 * | 2462.00 | 96.26  | 58.72      | 37.54  | 54.00      | 42.26      | 218  | 240  | Average | Vertical  |
| 3 ! | 2483.50 | 52.04  | 14.48      | 37.56  | 54.00      | -1.96      | 218  | 240  | Average | Vertical  |

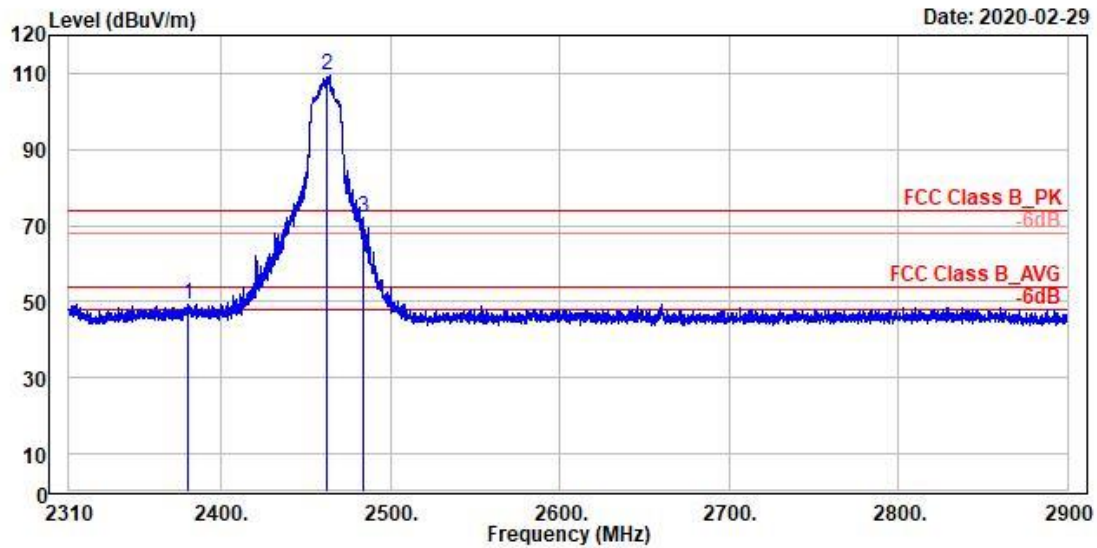

|     | Freq    | Level  | Read Level | Factor | Limit Line | Over Limit | APos | TPos | Remark | Pol/Phase  |
|-----|---------|--------|------------|--------|------------|------------|------|------|--------|------------|
|     | MHz     | dBuV/m | dBuV       | dB/m   | dBuV/m     | dB         | cm   | deg  |        |            |
| 1   | 2380.21 | 49.50  | 12.20      | 37.30  | 74.00      | -24.50     | 273  | 215  | Peak   | Horizontal |
| 2 * | 2462.00 | 109.51 | 71.97      | 37.54  | 74.00      | 35.51      | 273  | 215  | Peak   | Horizontal |
| 3 ! | 2484.40 | 72.27  | 34.71      | 37.56  | 74.00      | -1.73      | 273  | 215  | Peak   | Horizontal |

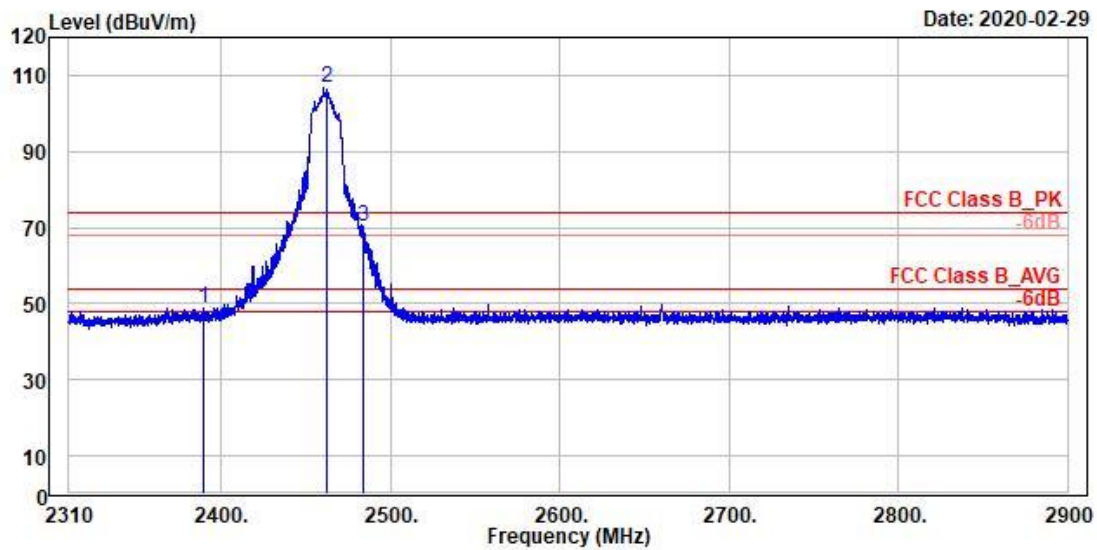


|     | Freq    | Level  | Read Level | Factor | Limit Line | Over Limit | APos | TPos | Remark | Pol/Phase |
|-----|---------|--------|------------|--------|------------|------------|------|------|--------|-----------|
|     | MHz     | dBuV/m | dBuV       | dB/m   | dBuV/m     | dB         | cm   | deg  |        |           |
| 1   | 2389.77 | 49.04  | 11.71      | 37.33  | 74.00      | -24.96     | 218  | 240  | Peak   | Vertical  |
| 2 * | 2462.00 | 106.80 | 69.26      | 37.54  | 74.00      | 32.80      | 218  | 240  | Peak   | Vertical  |
| 3 ! | 2483.81 | 70.23  | 32.67      | 37.56  | 74.00      | -3.77      | 218  | 240  | Peak   | Vertical  |

# Spurious Emissions, TX Mode, 9kHz-30MHz


2462MHz, HT20



TUV Rheinland Taiwan Ltd.  
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)  
Tel: +886-2172-1000 Fax: +886-2172-1322

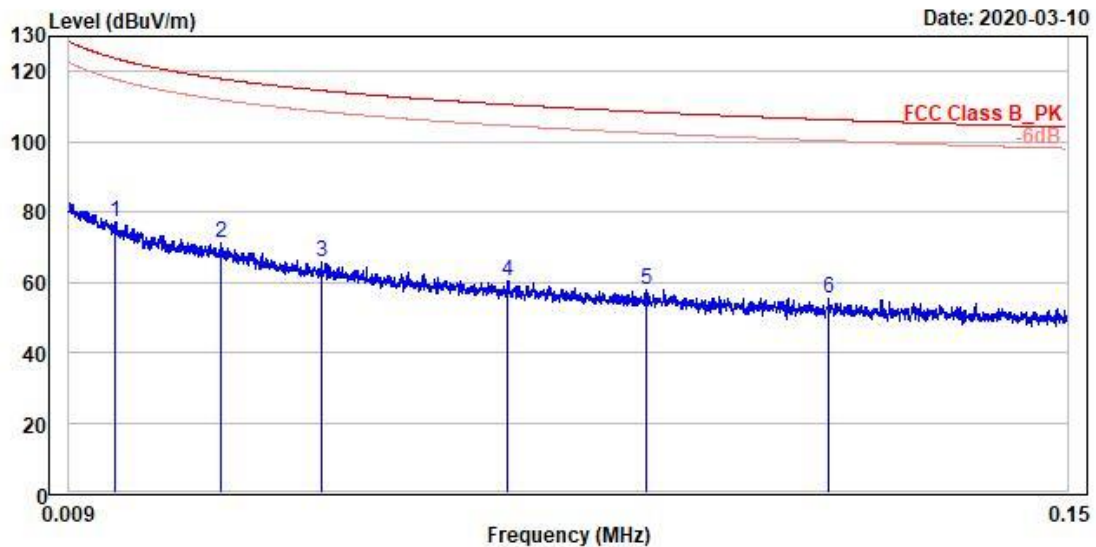

|   | Freq | Level  | Read Level | Factor | Limit Line | Over Limit | APos | TPos | Remark | Pol/Phase |
|---|------|--------|------------|--------|------------|------------|------|------|--------|-----------|
|   | MHz  | dBuV/m | dBuV       | dB/m   | dBuV/m     | dB         | cm   | deg  |        |           |
| 1 | 0.02 | 77.33  | 2.03       | 75.30  | 123.72     | -46.39     | 100  | 113  | QP     | vertical  |
| 2 | 0.03 | 70.99  | 0.38       | 70.61  | 117.92     | -46.93     | 100  | 146  | QP     | vertical  |
| 3 | 0.04 | 65.89  | -0.48      | 66.37  | 114.58     | -48.69     | 100  | 11   | QP     | vertical  |
| 4 | 0.07 | 60.18  | -2.06      | 62.24  | 110.56     | -50.38     | 100  | 197  | QP     | vertical  |
| 5 | 0.09 | 57.94  | -2.45      | 60.39  | 108.46     | -50.52     | 100  | 270  | QP     | vertical  |
| 6 | 0.12 | 55.40  | -2.90      | 58.30  | 106.28     | -50.88     | 100  | 267  | QP     | vertical  |

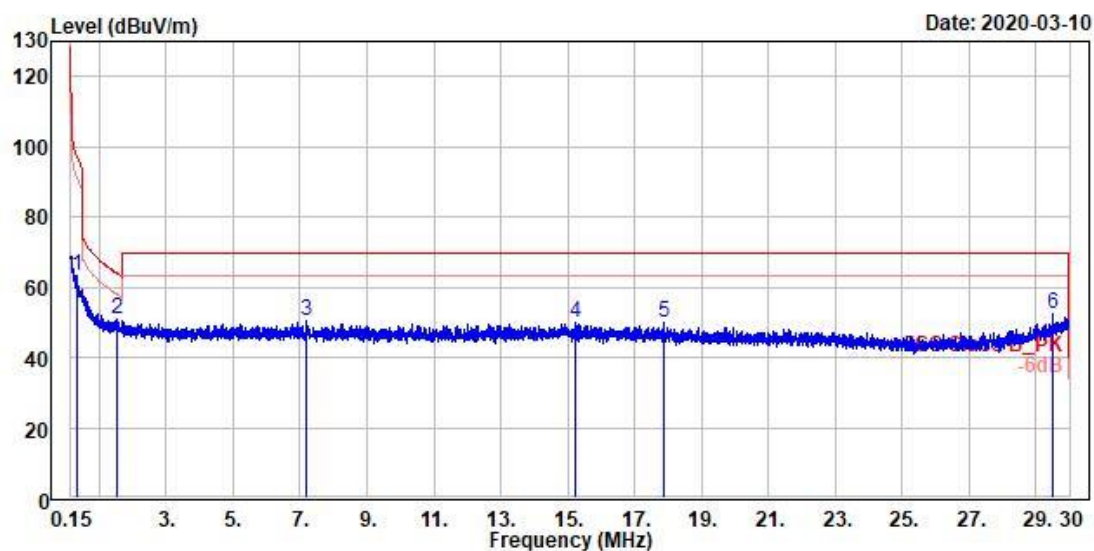


|   | Freq  | Level  | Read Level | Factor | Limit Line | Over Limit | APos | TPos   | Remark | Pol/Phase |
|---|-------|--------|------------|--------|------------|------------|------|--------|--------|-----------|
|   | MHz   | dBuV/m | dBuV       | dB/m   | dBuV/m     | dB         | cm   | deg    |        |           |
| 1 | 0.31  | 63.41  | 13.25      | 50.16  | 97.66      | -34.25     | 100  | 274 QP |        | vertical  |
| 2 | 1.54  | 50.78  | 11.49      | 39.29  | 63.83      | -13.05     | 100  | 240 QP |        | vertical  |
| 3 | 7.19  | 50.25  | 11.95      | 38.30  | 69.50      | -19.25     | 100  | 281 QP |        | vertical  |
| 4 | 15.23 | 50.11  | 12.43      | 37.68  | 69.50      | -19.39     | 100  | 118 QP |        | vertical  |
| 5 | 17.88 | 49.74  | 12.86      | 36.88  | 69.50      | -19.76     | 100  | 100 QP |        | vertical  |
| 6 | 29.50 | 52.35  | 13.82      | 38.53  | 69.50      | -17.15     | 100  | 114 QP |        | vertical  |

# Spurious Emissions, TX Mode, 30MHz-1GHz


2462MHz, HT20



TUV Rheinland Taiwan Ltd.  
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)  
Tel: +886-2172-1000 Fax: +886-2172-1322

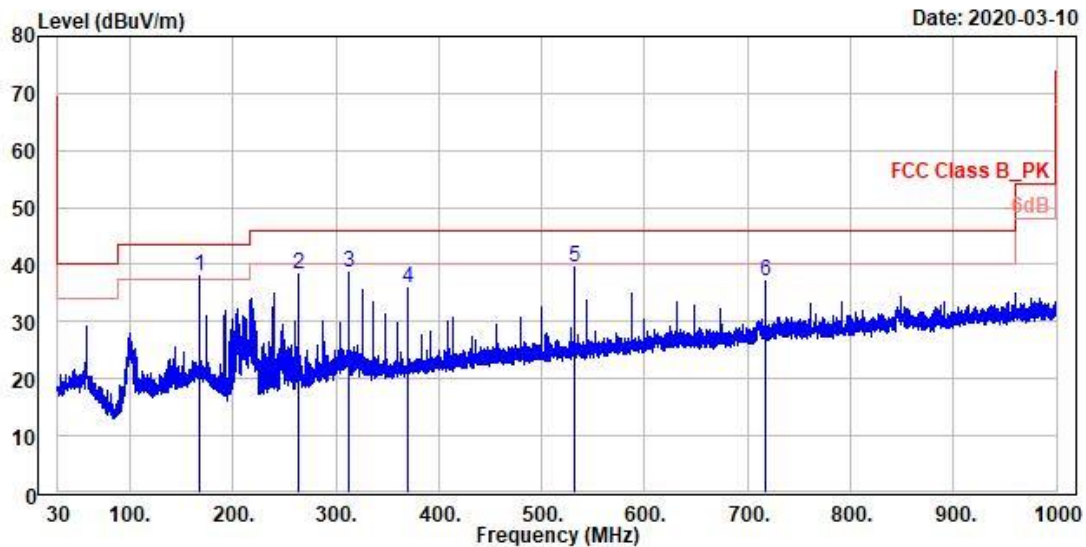

|     | Freq   | Level  | Read Level | Factor | Limit Line | Over Limit | APos | TPos | Remark | Pol/Phase  |
|-----|--------|--------|------------|--------|------------|------------|------|------|--------|------------|
|     | MHz    | dBuV/m | dBuV       | dB/m   | dBuV/m     | dB         | cm   | deg  |        |            |
| 1 ! | 167.93 | 37.98  | 45.19      | -7.21  | 43.50      | -5.52      | 194  | 360  | QP     | horizontal |
| 2   | 263.96 | 38.24  | 45.93      | -7.69  | 46.00      | -7.76      | 100  | 184  | QP     | horizontal |
| 3   | 311.98 | 38.57  | 44.79      | -6.22  | 46.00      | -7.43      | 100  | 287  | QP     | horizontal |
| 4   | 369.79 | 35.99  | 41.20      | -5.21  | 46.00      | -10.01     | 100  | 131  | QP     | horizontal |
| 5   | 532.07 | 39.58  | 42.24      | -2.66  | 46.00      | -6.42      | 200  | 139  | QP     | horizontal |
| 6   | 717.83 | 37.25  | 36.79      | 0.46   | 46.00      | -8.75      | 100  | 150  | QP     | horizontal |

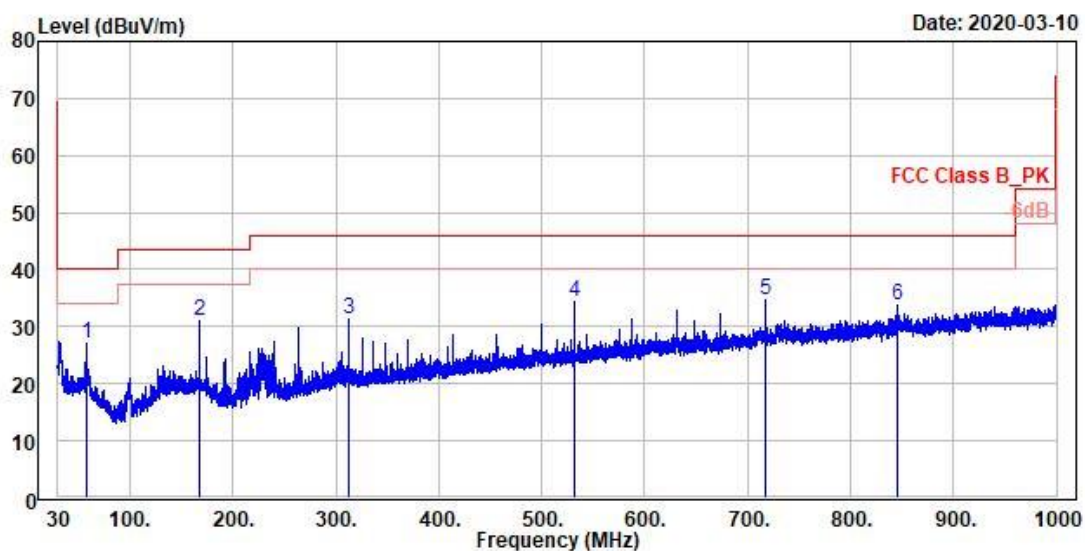


|   | Freq   | Level  | Read Level | Factor | Limit Line | Over Limit | APos | TPos | Remark | Pol/Phase |
|---|--------|--------|------------|--------|------------|------------|------|------|--------|-----------|
|   | MHz    | dBuV/m | dBuV       | dB/m   | dBuV/m     | dB         | cm   | deg  |        |           |
| 1 | 57.65  | 26.93  | 34.88      | -7.95  | 40.00      | -13.07     | 100  | 328  | QP     | vertical  |
| 2 | 167.93 | 31.12  | 38.33      | -7.21  | 43.50      | -12.38     | 200  | 272  | QP     | vertical  |
| 3 | 311.98 | 31.24  | 37.46      | -6.22  | 46.00      | -14.76     | 100  | 234  | QP     | vertical  |
| 4 | 531.98 | 34.51  | 37.17      | -2.66  | 46.00      | -11.49     | 100  | 360  | QP     | vertical  |
| 5 | 717.83 | 34.63  | 34.17      | 0.46   | 46.00      | -11.37     | 200  | 207  | QP     | vertical  |
| 6 | 845.48 | 33.64  | 31.30      | 2.34   | 46.00      | -12.36     | 200  | 131  | QP     | vertical  |

# Spurious Emissions, TX Mode, 1GHz-26.5GHz


2412MHz, b




TUV Rheinland Taiwan Ltd.  
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)  
Tel: +886-2172-1000 Fax: +886-2172-1322

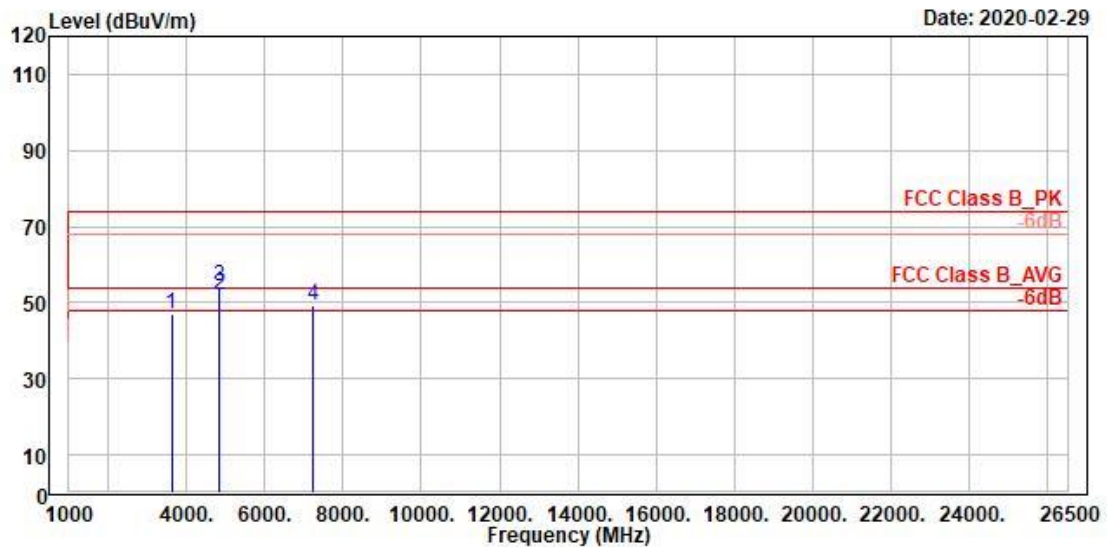


|     | Freq    | Level  | Read Level | Factor | Limit Line | Over Limit | APos | TPos | Remark  | Pol/Phase  |
|-----|---------|--------|------------|--------|------------|------------|------|------|---------|------------|
|     | MHz     | dBuV/m | dBuV       | dB/m   | dBuV/m     | dB         | cm   | deg  |         |            |
| 1   | 3616.77 | 46.96  | 58.93      | -11.97 | 74.00      | -27.04     | 171  | 360  | Peak    | horizontal |
| 2 ! | 4823.82 | 51.91  | 62.05      | -10.14 | 54.00      | -2.09      | 337  | 72   | Average | horizontal |
| 3   | 4823.82 | 54.43  | 64.57      | -10.14 | 74.00      | -19.57     | 337  | 72   | Peak    | horizontal |
| 4   | 7234.41 | 49.34  | 57.12      | -7.78  | 74.00      | -24.66     | 151  | 268  | Peak    | horizontal |

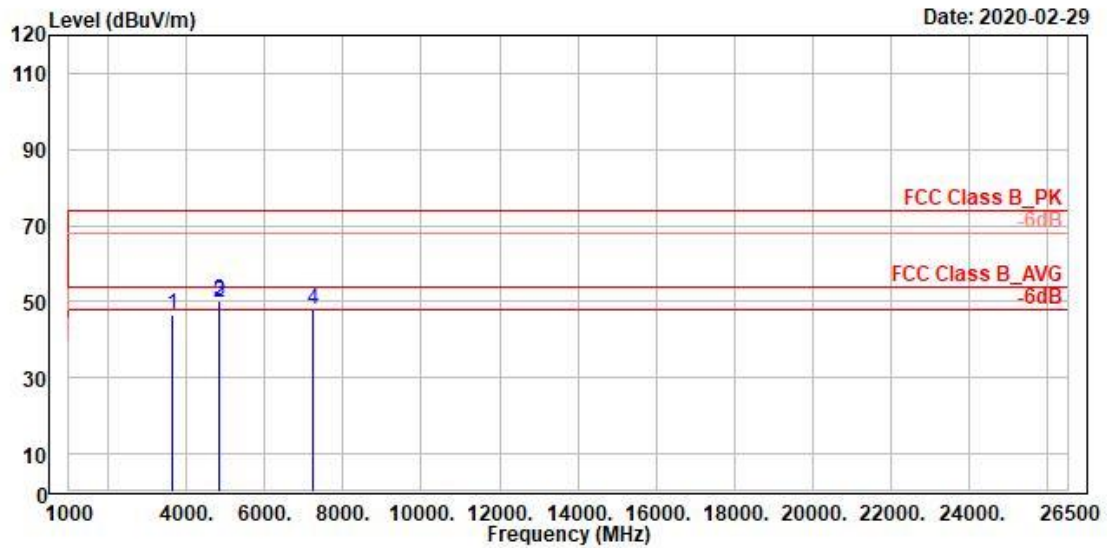

|   | Freq    | Level  | Read Level | Factor | Limit Line | Over Limit | APos | TPos | Remark  | Pol/Phase |
|---|---------|--------|------------|--------|------------|------------|------|------|---------|-----------|
|   | MHz     | dBuV/m | dBuV       | dB/m   | dBuV/m     | dB         | cm   | deg  |         |           |
| 1 | 3619.41 | 46.75  | 58.70      | -11.95 | 74.00      | -27.25     | 400  | 62   | Peak    | vertical  |
| 2 | 4824.00 | 49.52  | 59.66      | -10.14 | 54.00      | -4.48      | 200  | 360  | Average | vertical  |
| 3 | 4824.00 | 50.33  | 60.47      | -10.14 | 74.00      | -23.67     | 200  | 360  | Peak    | vertical  |
| 4 | 7236.00 | 47.99  | 55.77      | -7.78  | 74.00      | -26.01     | 400  | 67   | Peak    | vertical  |

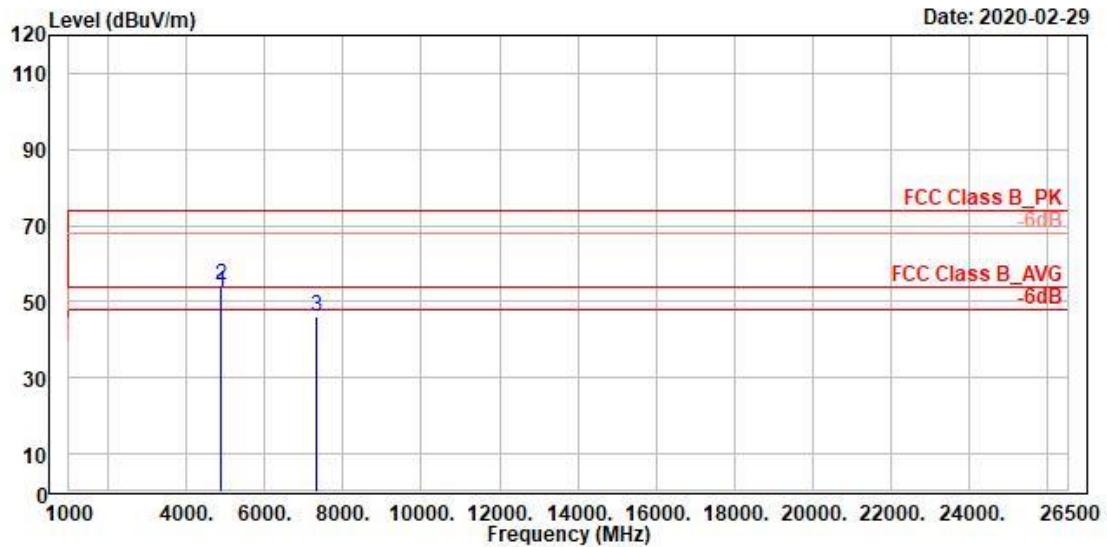


|     | Freq    | Level  | Read Level | Factor | Limit Line | Over Limit | APos | TPos | Remark  | Pol/Phase  |
|-----|---------|--------|------------|--------|------------|------------|------|------|---------|------------|
|     | MHz     | dBuV/m | dBuV       | dB/m   | dBuV/m     | dB         | cm   | deg  |         |            |
| 1 ! | 4874.00 | 52.63  | 62.68      | -10.05 | 54.00      | -1.37      | 353  | 90   | Average | horizontal |
| 2   | 4874.00 | 54.46  | 64.51      | -10.05 | 74.00      | -19.54     | 353  | 90   | Peak    | horizontal |
| 3   | 7311.00 | 46.19  | 53.95      | -7.76  | 74.00      | -27.81     | 300  | 341  | Peak    | horizontal |

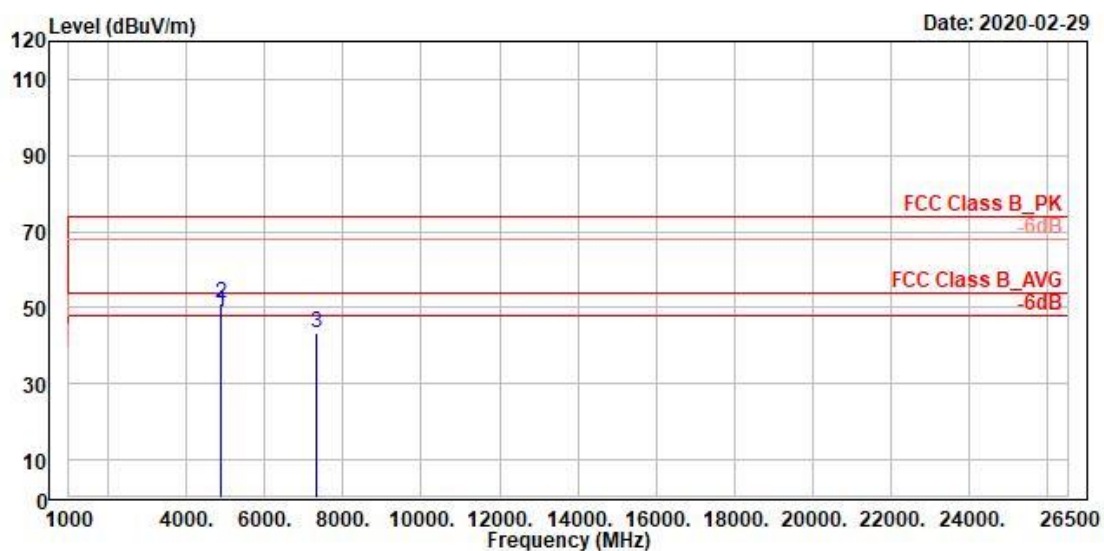


|     | Freq    | Level  | Read Level | Factor | Limit Line | Over Limit | APos | TPos | Remark  | Pol/Phase |
|-----|---------|--------|------------|--------|------------|------------|------|------|---------|-----------|
|     | MHz     | dBuV/m | dBuV       | dB/m   | dBuV/m     | dB         | cm   | deg  |         |           |
| 1 ! | 4874.00 | 48.96  | 59.01      | -10.05 | 54.00      | -5.04      | 174  | 360  | Average | vertical  |
| 2   | 4874.00 | 51.20  | 61.25      | -10.05 | 74.00      | -22.80     | 174  | 360  | Peak    | vertical  |
| 3   | 7311.00 | 43.51  | 51.27      | -7.76  | 74.00      | -30.49     | 200  | 302  | Peak    | vertical  |



TUV Rheinland Taiwan Ltd.  
 No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)  
 Tel:+886-2172-1000 Fax:+886-2172-1322

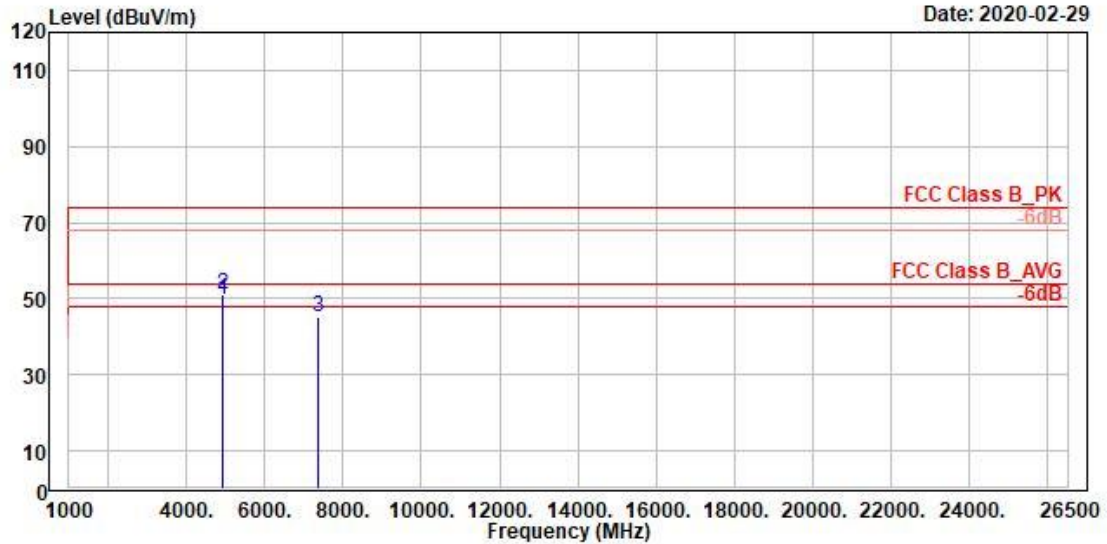


|     | Freq    | Level  | Read Level | Factor | Limit Line | Over Limit | APos | TPos | Remark  | Pol/Phase  |
|-----|---------|--------|------------|--------|------------|------------|------|------|---------|------------|
|     | MHz     | dBuV/m | dBuV       | dB/m   | dBuV/m     | dB         | cm   | deg  |         |            |
| 1 ! | 4924.00 | 49.74  | 59.62      | -9.88  | 54.00      | -4.26      | 349  | 270  | Average | horizontal |
| 2   | 4924.00 | 51.13  | 61.01      | -9.88  | 74.00      | -22.87     | 349  | 270  | Peak    | horizontal |
| 3   | 7386.00 | 45.24  | 52.94      | -7.70  | 74.00      | -28.76     | 300  | 341  | Peak    | horizontal |

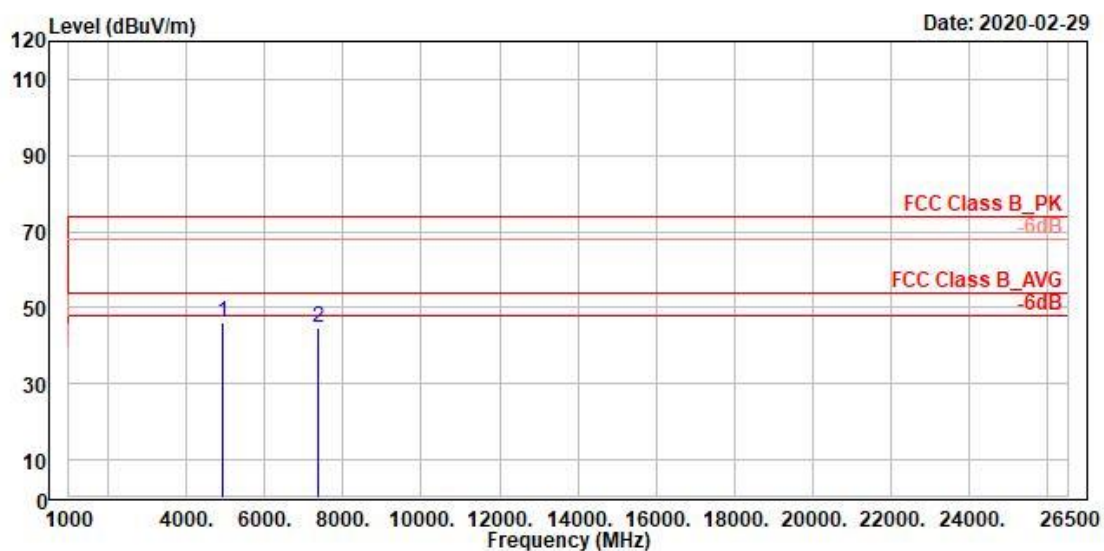


|   | Freq    | Level  | Read Level | Factor | Limit Line | Over Limit | APos | TPos | Remark | Pol/Phase |
|---|---------|--------|------------|--------|------------|------------|------|------|--------|-----------|
|   | MHz     | dBuV/m | dBuV       | dB/m   | dBuV/m     | dB         | cm   | deg  |        |           |
| 1 | 4924.00 | 46.05  | 55.93      | -9.88  | 74.00      | -27.95     | 100  | 202  | Peak   | vertical  |
| 2 | 7386.00 | 44.76  | 52.46      | -7.70  | 74.00      | -29.24     | 400  | 54   | Peak   | vertical  |



TÜV Rheinland Taiwan Ltd.  
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)  
Tel: +886-2172-1000 Fax: +886-2172-1322

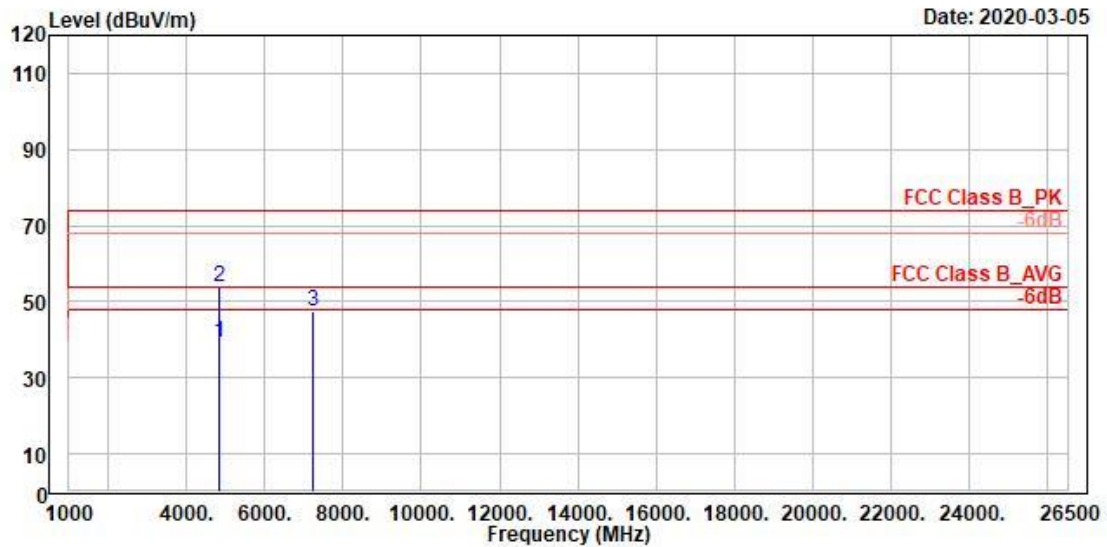


|   | Freq    | Level  | Read<br>Level | Factor | Limit<br>Line | Over<br>Limit | APos | TPos | Remark  | Pol/Phase  |
|---|---------|--------|---------------|--------|---------------|---------------|------|------|---------|------------|
|   | MHz     | dBuV/m | dBuV          | dB/m   | dBuV/m        | dB            | cm   | deg  |         |            |
| 1 | 4824.00 | 39.03  | 49.17         | -10.14 | 54.00         | -14.97        | 200  | 246  | Average | horizontal |
| 2 | 4824.00 | 53.89  | 64.03         | -10.14 | 74.00         | -20.11        | 200  | 246  | Peak    | horizontal |
| 3 | 7236.00 | 47.51  | 55.29         | -7.78  | 74.00         | -26.49        | 350  | 317  | Peak    | horizontal |

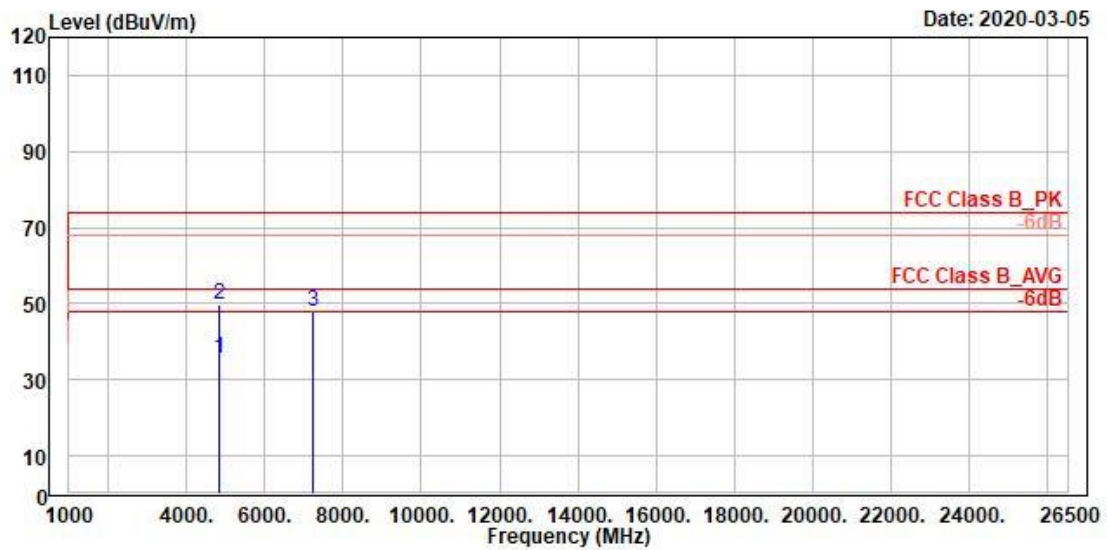


|   | Freq    | Level  | Read Level | Factor | Limit Line | Over Limit | APos | TPos | Remark  | Pol/Phase |
|---|---------|--------|------------|--------|------------|------------|------|------|---------|-----------|
|   | MHz     | dBuV/m | dBuV       | dB/m   | dBuV/m     | dB         | cm   | deg  |         |           |
| 1 | 4824.00 | 35.58  | 45.72      | -10.14 | 54.00      | -18.42     | 148  | 0    | Average | vertical  |
| 2 | 4824.00 | 49.75  | 59.89      | -10.14 | 74.00      | -24.25     | 148  | 0    | Peak    | vertical  |
| 3 | 7236.00 | 47.98  | 55.76      | -7.78  | 74.00      | -26.02     | 300  | 72   | Peak    | vertical  |



TUV Rheinland Taiwan Ltd.  
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)  
Tel:+886-2172-1000 Fax:+886-2172-1322

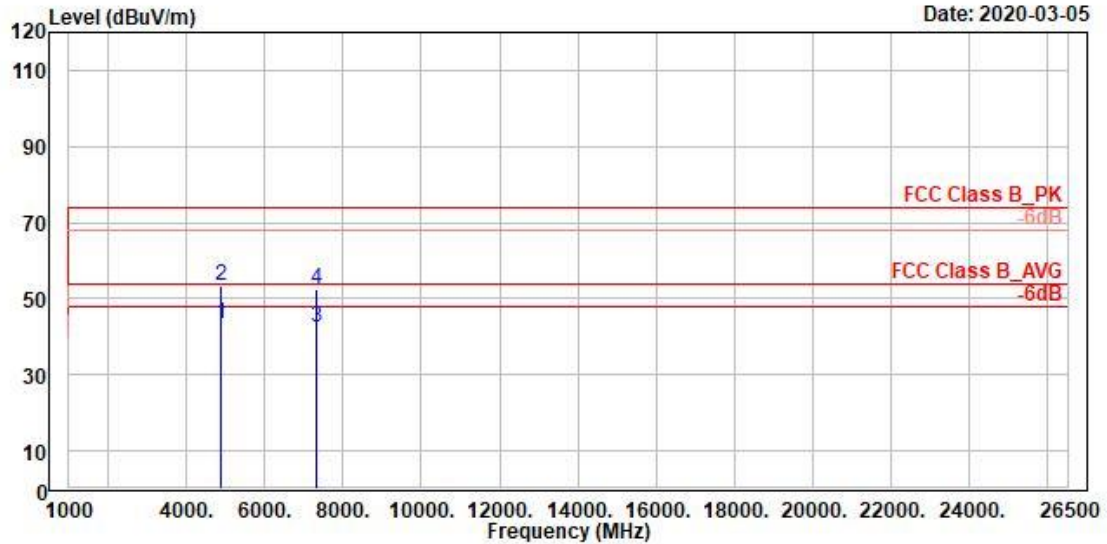


|   | Freq    | Level  | Read Level | Factor | Limit Line | Over Limit | APos | TPos | Remark  | Pol/Phase  |
|---|---------|--------|------------|--------|------------|------------|------|------|---------|------------|
|   | MHz     | dBuV/m | dBuV       | dB/m   | dBuV/m     | dB         | cm   | deg  |         |            |
| 1 | 4874.00 | 43.56  | 53.61      | -10.05 | 54.00      | -10.44     | 400  | 60   | Average | horizontal |
| 2 | 4874.00 | 53.23  | 63.28      | -10.05 | 74.00      | -20.77     | 400  | 60   | Peak    | horizontal |
| 3 | 7311.00 | 42.61  | 50.37      | -7.76  | 54.00      | -11.39     | 400  | 336  | Average | horizontal |
| 4 | 7311.00 | 52.27  | 60.03      | -7.76  | 74.00      | -21.73     | 400  | 336  | Peak    | horizontal |

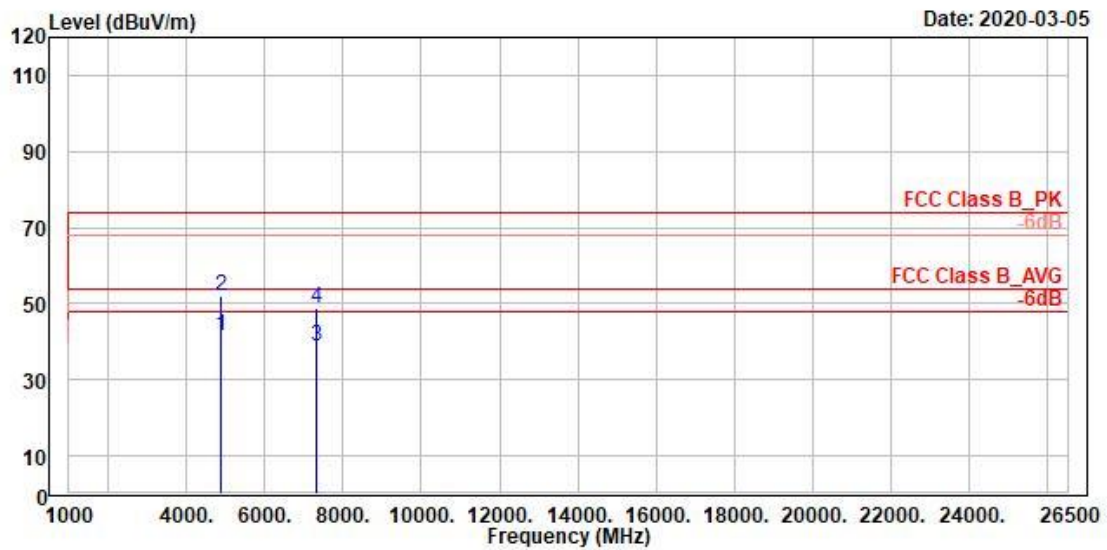


|   | Freq    | Level  | Read Level | Factor | Limit Line | Over Limit | APos | TPos | Remark  | Pol/Phase |
|---|---------|--------|------------|--------|------------|------------|------|------|---------|-----------|
|   | MHz     | dBuV/m | dBuV       | dB/m   | dBuV/m     | dB         | cm   | deg  |         |           |
| 1 | 4872.00 | 41.53  | 51.59      | -10.06 | 54.00      | -12.47     | 200  | 339  | Average | vertical  |
| 2 | 4872.00 | 51.91  | 61.97      | -10.06 | 74.00      | -22.09     | 200  | 339  | Peak    | vertical  |
| 3 | 7311.00 | 38.85  | 46.61      | -7.76  | 54.00      | -15.15     | 300  | 39   | Average | vertical  |
| 4 | 7311.00 | 48.73  | 56.49      | -7.76  | 74.00      | -25.27     | 300  | 39   | Peak    | vertical  |




TÜV Rheinland Taiwan Ltd.  
 No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)  
 Tel: +886-2172-1000 Fax: +886-2172-1322

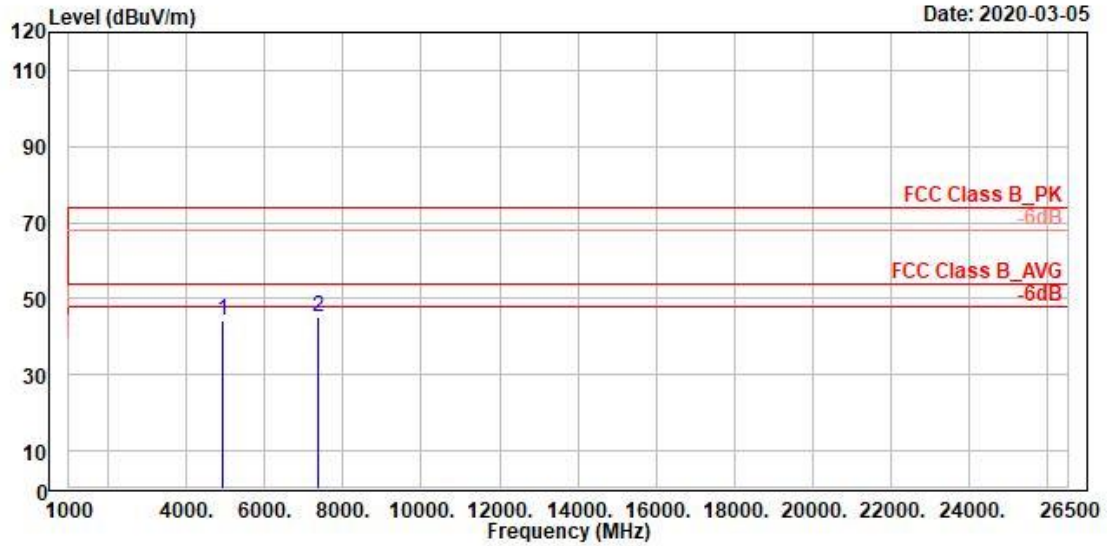


|   | Freq    | Level  | Read<br>Level | Factor | Limit<br>Line | Over<br>Limit | APos | TPos | Remark | Pol/Phase  |
|---|---------|--------|---------------|--------|---------------|---------------|------|------|--------|------------|
|   | MHz     | dBuV/m | dBuV          | dB/m   | dBuV/m        | dB            | cm   | deg  |        |            |
| 1 | 4924.00 | 44.46  | 54.34         | -9.88  | 74.00         | -29.54        | 300  | 59   | Peak   | horizontal |
| 2 | 7386.00 | 45.15  | 52.85         | -7.70  | 74.00         | -28.85        | 300  | 337  | Peak   | horizontal |

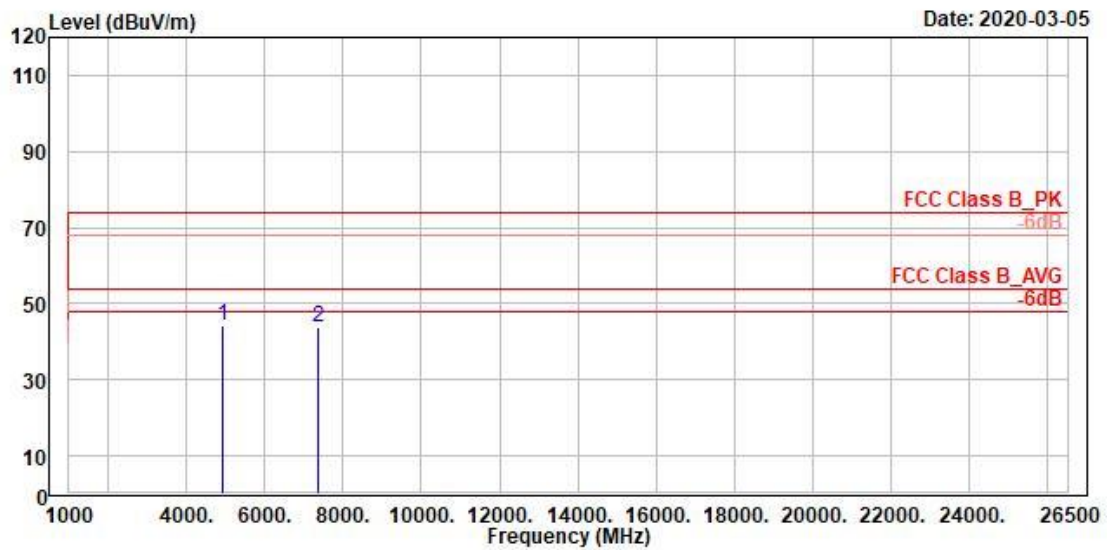

|   | Freq    | Level  | Read Level | Factor | Limit Line | Over Limit | APos | TPos | Remark | Pol/Phase |
|---|---------|--------|------------|--------|------------|------------|------|------|--------|-----------|
|   | MHz     | dBuV/m | dBuV       | dB/m   | dBuV/m     | dB         | cm   | deg  |        |           |
| 1 | 4924.00 | 44.41  | 54.29      | -9.88  | 74.00      | -29.59     | 200  | 360  | Peak   | vertical  |
| 2 | 7386.00 | 43.60  | 51.30      | -7.70  | 74.00      | -30.40     | 300  | 68   | Peak   | vertical  |

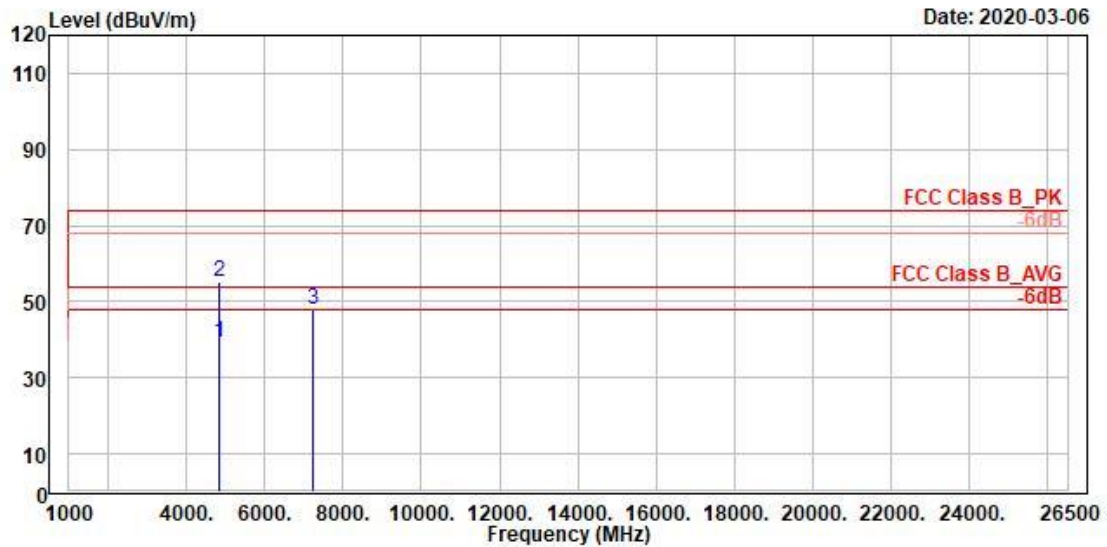


|   | Freq    | Level  | Read<br>Level | Factor | Limit<br>Line | Over<br>Limit | APos | TPos | Remark  | Pol/Phase  |
|---|---------|--------|---------------|--------|---------------|---------------|------|------|---------|------------|
|   | MHz     | dBuV/m | dBuV          | dB/m   | dBuV/m        | dB            | cm   | deg  |         |            |
| 1 | 4824.00 | 39.21  | 49.35         | -10.14 | 54.00         | -14.79        | 200  | 249  | Average | horizontal |
| 2 | 4824.00 | 55.05  | 65.19         | -10.14 | 74.00         | -18.95        | 200  | 249  | Peak    | horizontal |
| 3 | 7236.00 | 47.85  | 55.63         | -7.78  | 74.00         | -26.15        | 400  | 347  | Peak    | horizontal |

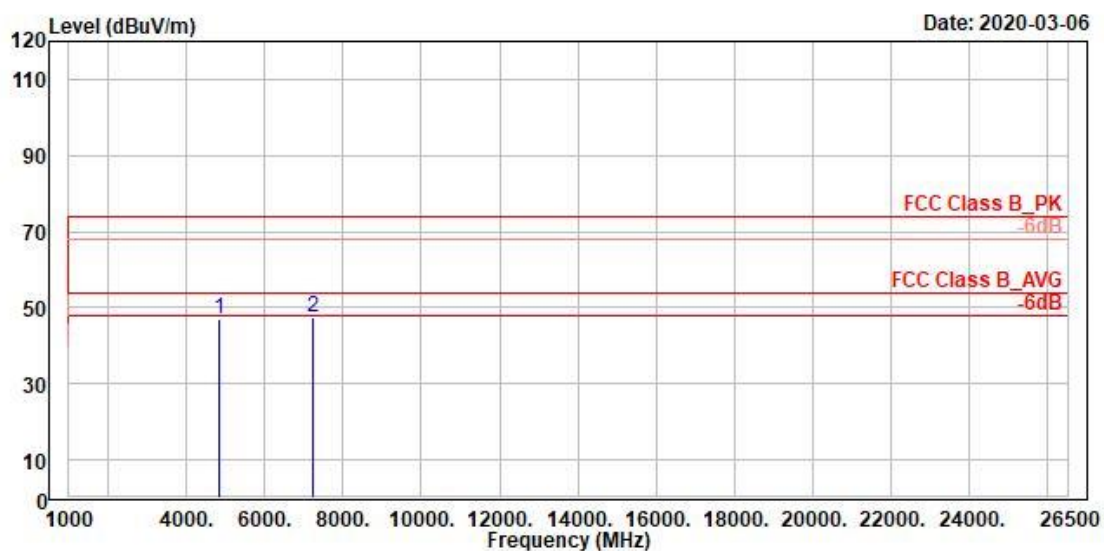


|   | Freq    | Level  | Read Level | Factor | Limit Line | Over Limit | APos | TPos | Remark | Pol/Phase |
|---|---------|--------|------------|--------|------------|------------|------|------|--------|-----------|
|   | MHz     | dBuV/m | dBuV       | dB/m   | dBuV/m     | dB         | cm   | deg  |        |           |
| 1 | 4824.00 | 47.10  | 57.24      | -10.14 | 74.00      | -26.90     | 140  | 360  | Peak   | vertical  |
| 2 | 7236.00 | 47.67  | 55.45      | -7.78  | 74.00      | -26.33     | 200  | 81   | Peak   | vertical  |



TÜV Rheinland Taiwan Ltd.  
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)  
Tel: +886-2172-1000 Fax: +886-2172-1322

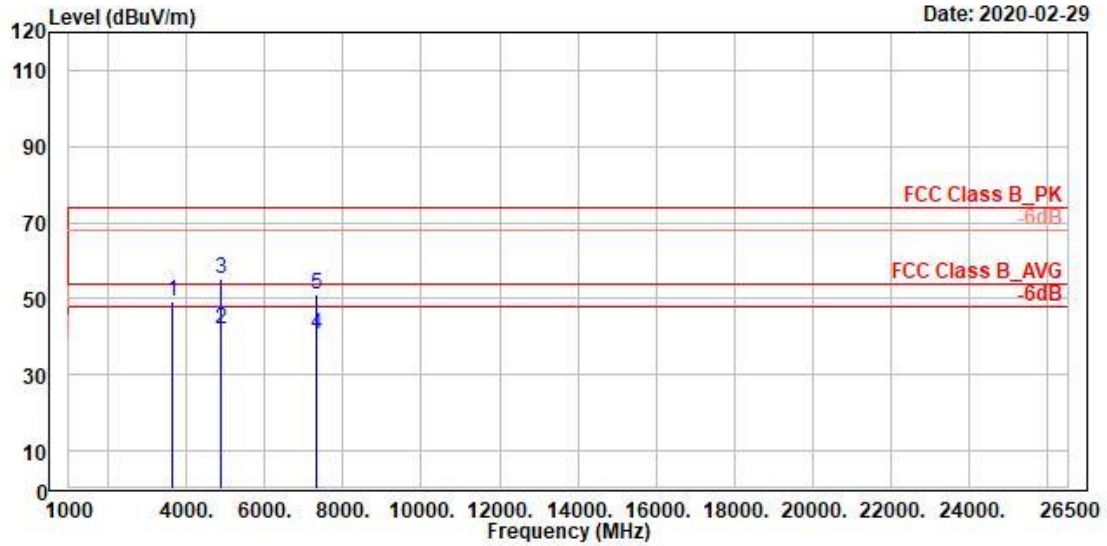


|   | Freq    | Level  | Read Level | Factor | Limit Line | Over Limit | APos | TPos | Remark  | Pol/Phase  |
|---|---------|--------|------------|--------|------------|------------|------|------|---------|------------|
|   | MHz     | dBuV/m | dBuV       | dB/m   | dBuV/m     | dB         | cm   | deg  |         |            |
| 1 | 3656.47 | 49.13  | 60.87      | -11.74 | 74.00      | -24.87     | 200  | 359  | Peak    | horizontal |
| 2 | 4874.00 | 41.77  | 51.82      | -10.05 | 54.00      | -12.23     | 331  | 86   | Average | horizontal |
| 3 | 4874.00 | 55.20  | 65.25      | -10.05 | 74.00      | -18.80     | 331  | 86   | Peak    | horizontal |
| 4 | 7311.00 | 40.78  | 48.54      | -7.76  | 54.00      | -13.22     | 300  | 343  | Average | horizontal |
| 5 | 7311.00 | 51.01  | 58.77      | -7.76  | 74.00      | -22.99     | 300  | 343  | Peak    | horizontal |

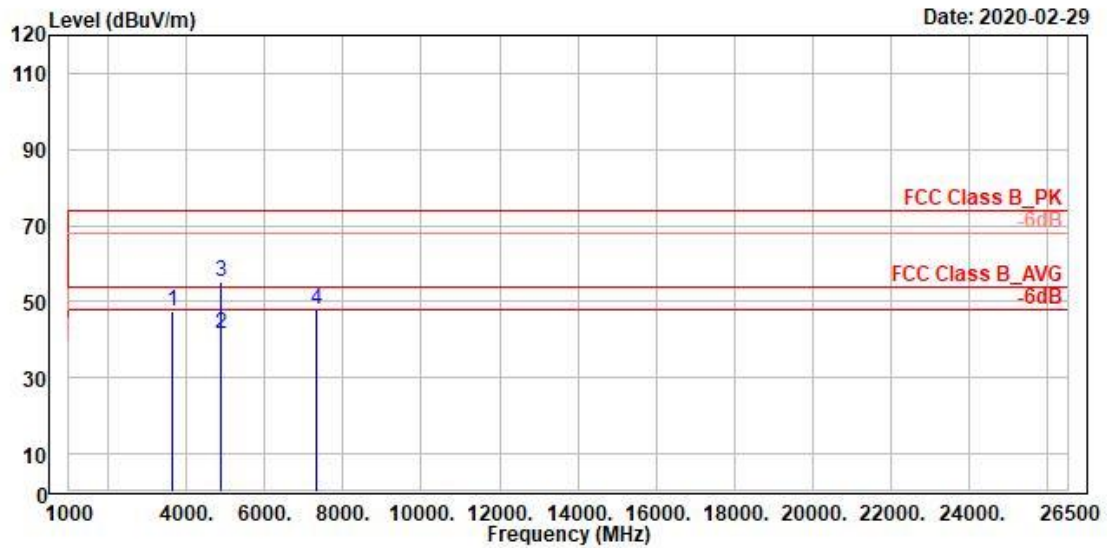


|   | Freq    | Level  | Read Level | Factor | Limit Line | Over Limit | APos | TPos | Remark  | Pol/Phase |
|---|---------|--------|------------|--------|------------|------------|------|------|---------|-----------|
|   | MHz     | dBuV/m | dBuV       | dB/m   | dBuV/m     | dB         | cm   | deg  |         |           |
| 1 | 3656.47 | 47.36  | 59.10      | -11.74 | 74.00      | -26.64     | 300  | 36   | Peak    | vertical  |
| 2 | 4874.00 | 41.41  | 51.46      | -10.05 | 54.00      | -12.59     | 168  | 341  | Average | vertical  |
| 3 | 4874.00 | 55.17  | 65.22      | -10.05 | 74.00      | -18.83     | 168  | 341  | Peak    | vertical  |
| 4 | 7311.00 | 48.04  | 55.80      | -7.76  | 74.00      | -25.96     | 400  | 48   | Peak    | vertical  |



TÜV Rheinland Taiwan Ltd.  
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)  
Tel: +886-2172-1000 Fax: +886-2172-1322

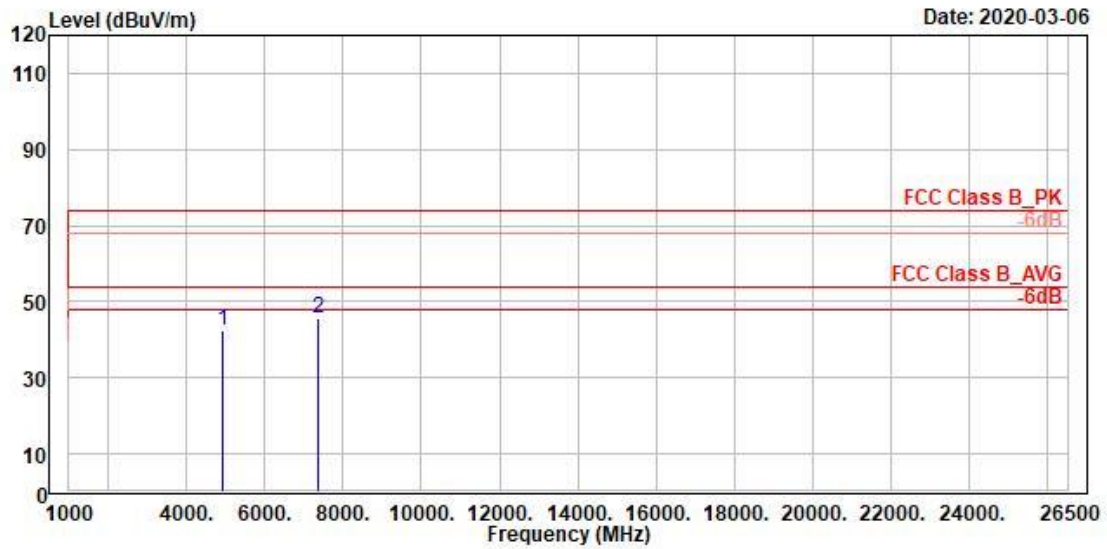

|   | Freq    | Level  | Read<br>Level | Factor | Limit<br>Line | Over<br>Limit | APos | TPos | Remark | Pol/Phase  |
|---|---------|--------|---------------|--------|---------------|---------------|------|------|--------|------------|
|   | MHz     | dBuV/m | dBuV          | dB/m   | dBuV/m        | dB            | cm   | deg  |        |            |
| 1 | 4924.00 | 42.52  | 52.40         | -9.88  | 74.00         | -31.48        | 300  | 4    | Peak   | horizontal |
| 2 | 7386.00 | 45.63  | 53.33         | -7.70  | 74.00         | -28.37        | 300  | 330  | Peak   | horizontal |

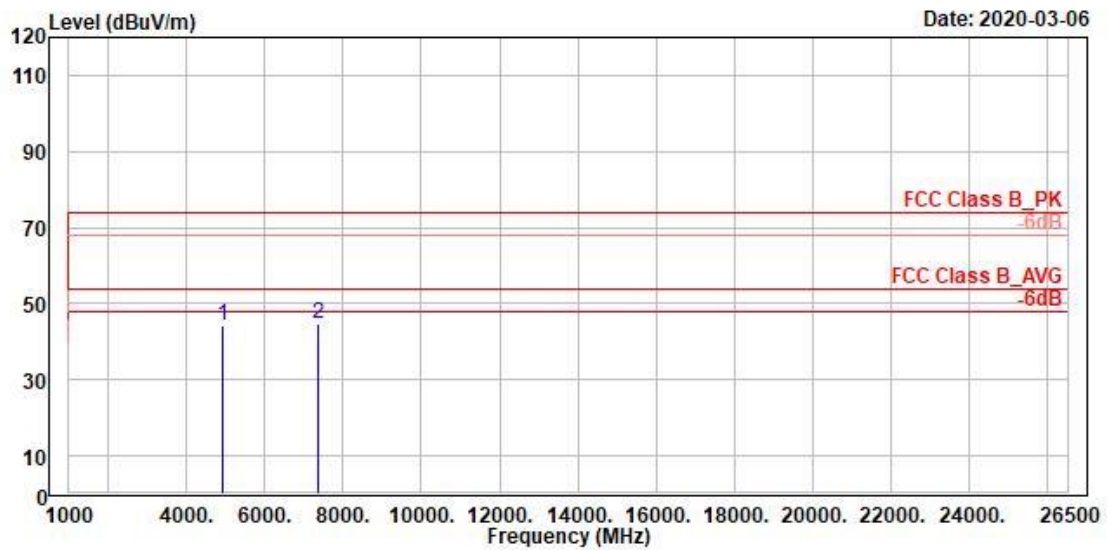


|   | Freq    | Level  | Read Level | Factor | Limit Line | Over Limit | APos | TPos | Remark | Pol/Phase |
|---|---------|--------|------------|--------|------------|------------|------|------|--------|-----------|
|   | MHz     | dBuV/m | dBuV       | dB/m   | dBuV/m     | dB         | cm   | deg  |        |           |
| 1 | 4924.00 | 44.40  | 54.28      | -9.88  | 74.00      | -29.60     | 400  | 193  | Peak   | vertical  |
| 2 | 7386.00 | 44.67  | 52.37      | -7.70  | 74.00      | -29.33     | 300  | 57   | Peak   | vertical  |

## Spurious Emissions, AC Mains




TUV Rheinland Taiwan Ltd.  
11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105  
Tel:+886-2172-7000 Fax:+886-2528-0018

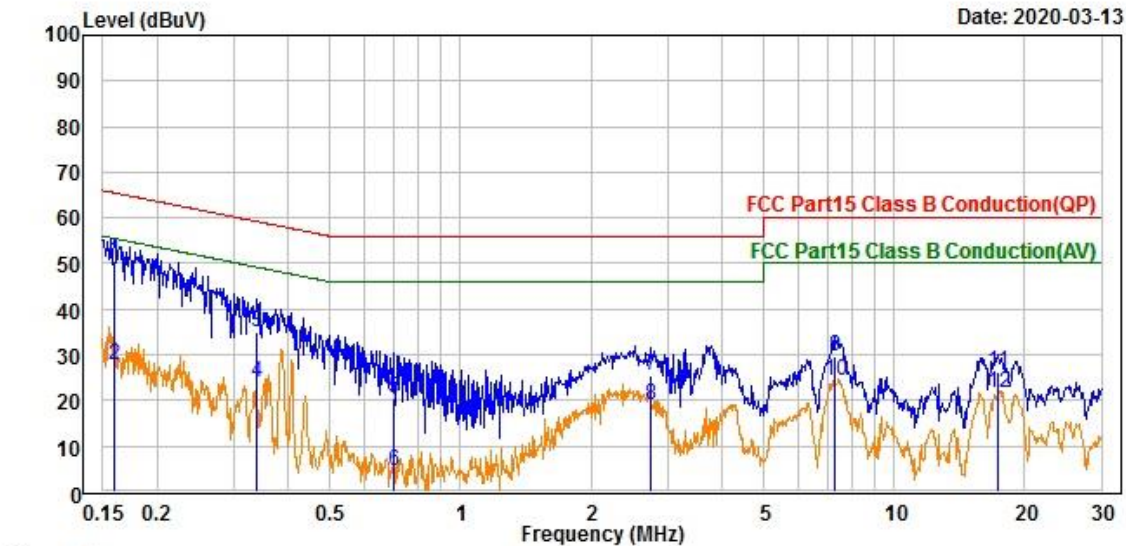

Trace: 1

|    | Freq   | Read Level | Factor | Level | Limit Line | Over Limit | Remark  |
|----|--------|------------|--------|-------|------------|------------|---------|
|    | MHz    | dBuV       | dB     | dBuV  | dBuV       | dB         |         |
| 1  | 0.159  | 40.83      | 9.61   | 50.44 | 65.50      | -15.06     | QP      |
| 2  | 0.159  | 18.02      | 9.61   | 27.63 | 55.50      | -27.87     | Average |
| 3  | 0.340  | 25.53      | 9.61   | 35.14 | 59.21      | -24.07     | QP      |
| 4  | 0.340  | 14.37      | 9.61   | 23.98 | 49.21      | -25.23     | Average |
| 5  | 0.700  | 11.02      | 9.62   | 20.64 | 56.00      | -35.36     | QP      |
| 6  | 0.700  | -5.07      | 9.62   | 4.55  | 46.00      | -41.45     | Average |
| 7  | 2.742  | 16.01      | 9.65   | 25.66 | 56.00      | -30.34     | QP      |
| 8  | 2.742  | 9.22       | 9.65   | 18.87 | 46.00      | -27.13     | Average |
| 9  | 7.320  | 20.01      | 9.70   | 29.71 | 60.00      | -30.29     | QP      |
| 10 | 7.320  | 14.80      | 9.70   | 24.50 | 50.00      | -25.50     | Average |
| 11 | 17.338 | 16.37      | 9.77   | 26.14 | 60.00      | -33.86     | QP      |
| 12 | 17.338 | 11.96      | 9.77   | 21.73 | 50.00      | -28.27     | Average |

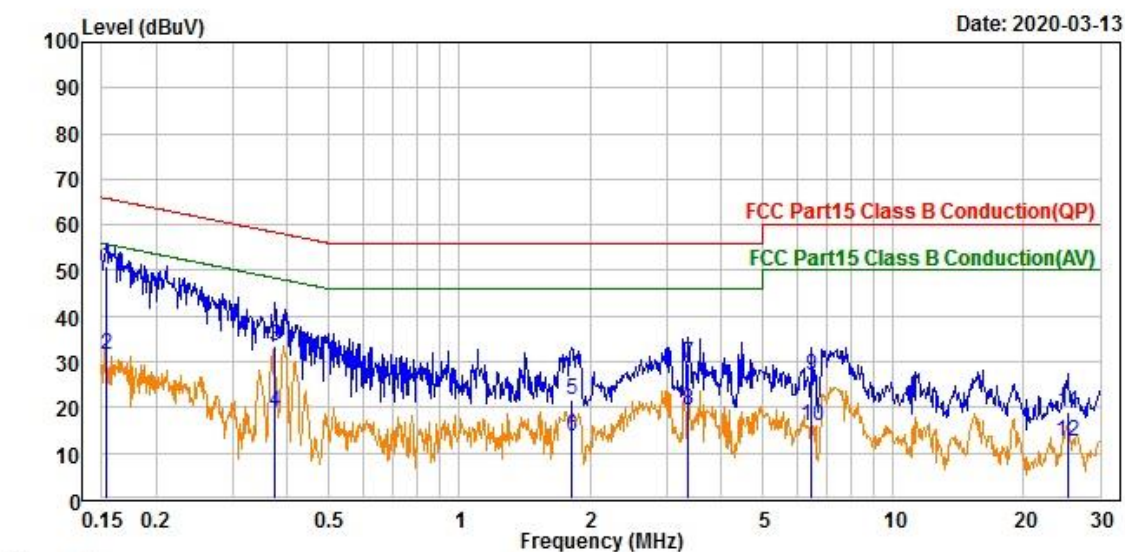

Trace: 1

|    | Freq   | Read Level | Factor | Level | Limit Line | Over Limit | Remark  |
|----|--------|------------|--------|-------|------------|------------|---------|
|    | MHz    | dBuV       | dB     | dBuV  | dBuV       | dB         |         |
| 1  | 0.154  | 41.17      | 9.62   | 50.79 | 65.79      | -15.00     | QP      |
| 2  | 0.154  | 22.04      | 9.62   | 31.66 | 55.79      | -24.13     | Average |
| 3  | 0.375  | 23.81      | 9.63   | 33.44 | 58.38      | -24.94     | QP      |
| 4  | 0.375  | 9.46       | 9.63   | 19.09 | 48.38      | -29.29     | Average |
| 5  | 1.813  | 11.94      | 9.65   | 21.59 | 56.00      | -34.41     | QP      |
| 6  | 1.813  | 4.15       | 9.65   | 13.80 | 46.00      | -32.20     | Average |
| 7  | 3.364  | 19.98      | 9.67   | 29.65 | 56.00      | -26.35     | QP      |
| 8  | 3.364  | 9.74       | 9.67   | 19.41 | 46.00      | -26.59     | Average |
| 9  | 6.495  | 17.17      | 9.71   | 26.88 | 60.00      | -33.12     | QP      |
| 10 | 6.495  | 6.18       | 9.71   | 15.89 | 50.00      | -34.11     | Average |
| 11 | 25.198 | 9.34       | 9.84   | 19.18 | 60.00      | -40.82     | QP      |
| 12 | 25.198 | 2.71       | 9.84   | 12.55 | 50.00      | -37.45     | Average |