

Appendix B: Test Results of BLE

APPENDIX B: TEST RESULTS OF BLE	1
APPENDIX B.1: TEST RESULTS OF CONDUCTED POWER SPECTRAL DENSITY	2
APPENDIX B.2: TEST RESULTS OF 6dB BANDWIDTH.....	5
APPENDIX B.3: TEST RESULTS OF 99% BANDWIDTH.....	8
APPENDIX B.4: TEST RESULTS OF CONDUCTED SPURIOUS EMISSIONS MEASURED IN 100 kHz BANDWIDTH.....	11
<i>Conducted Spurious Emission</i>	<i>11</i>
<i>Band Edge</i>	<i>18</i>
APPENDIX B.5: TEST RESULTS OF RADIATED SPURIOUS EMISSIONS	20
<i>30 MHz to 1GHz.....</i>	<i>20</i>
<i>1GHz-18GHz.....</i>	<i>24</i>
APPENDIX B.6: TEST RESULTS OF RADIATED EMISSIONS IN RESTRICTED BANDS	36
APPENDIX B.7: TEST RESULTS OF CONDUCTED EMISSION ON AC MAINS.....	40

Appendix B.1: Test Results of Conducted Power Spectral Density

TestMode	Antenna	Channel	Result[dBm/3-100kHz]	Limit[dBm/3kHz]	Verdict
BLE_1M	Ant1	2402	-12.39	≤8	PASS
		2440	-11.69	≤8	PASS
		2480	-11.36	≤8	PASS
BLE_2M	Ant1	2402	-9.85	≤8	PASS
		2440	-9.18	≤8	PASS
		2480	-8.91	≤8	PASS

BLE_1M Ant1 2402



BLE_1M Ant1 2440



BLE 1M Ant1 2480



BLE 2M Ant1 2402



BLE 2M Ant1 2440



BLE 2M Ant1 2480



Appendix B.2: Test Results of 6dB Bandwidth

TestMode	Antenna	Channel	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
BLE_1M	Ant1	2402	0.664	2401.656	2402.320	0.5	PASS
		2440	0.692	2439.624	2440.316	0.5	PASS
		2480	0.668	2479.640	2480.308	0.5	PASS
BLE_2M	Ant1	2402	1.104	2401.420	2402.524	0.5	PASS
		2440	1.116	2439.432	2440.548	0.5	PASS
		2480	1.216	2479.312	2480.528	0.5	PASS

BLE 1M Ant1 2402



BLE 1M Ant1 2440



BLE 1M Ant1 2480



BLE 2M Ant1 2402



BLE 2M Ant1 2440



BLE 2M Ant1 2480



Appendix B.3: Test Results of 99% Bandwidth

TestMode	Antenna	Channel	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
BLE_1M	Ant1	2402	1.0189	2401.476	2402.495	---	PASS
		2440	1.0239	2439.476	2440.500	---	PASS
		2480	1.0231	2479.475	2480.498	---	PASS
BLE_2M	Ant1	2402	2.0050	2400.991	2402.996	---	PASS
		2440	2.0237	2438.984	2441.007	---	PASS
		2480	2.0101	2478.988	2480.998	---	PASS

BLE 1M Ant1 2402



BLE 1M Ant1 2440



BLE 1M Ant1 2480



BLE 2M Ant1 2402



BLE 2M Ant1 2440



BLE 2M Ant1 2480



Appendix B.4: Test Results of Conducted Spurious Emissions Measured in 100 kHz Bandwidth

Conducted Spurious Emission

TestMode	Antenna	Channel	FreqRange [MHz]	RefLevel [dBm]	Result[dBm]	Limit[dBm]	Verdict
BLE_1M	Ant1	2402	Reference	2.05	2.05	---	PASS
			30~1000	2.05	-61.52	≤-17.95	PASS
			1000~26500	2.05	-50.26	≤-17.95	PASS
		2440	Reference	1.79	1.79	---	PASS
			30~1000	1.79	-61.7	≤-18.21	PASS
			1000~26500	1.79	-50.31	≤-18.21	PASS
		2480	Reference	3.00	3.00	---	PASS
			30~1000	3.00	-61.35	≤-17	PASS
			1000~26500	3.00	-48.66	≤-17	PASS
BLE_2M	Ant1	2402	Reference	0.44	0.44	---	PASS
			30~1000	0.44	-62.59	≤-19.56	PASS
			1000~26500	0.44	-50.83	≤-19.56	PASS
		2440	Reference	2.57	2.57	---	PASS
			30~1000	2.57	-62.87	≤-17.43	PASS
			1000~26500	2.57	-50.54	≤-17.43	PASS
		2480	Reference	2.49	2.49	---	PASS
			30~1000	2.49	-62.31	≤-17.51	PASS
			1000~26500	2.49	-51.91	≤-17.51	PASS

BLE 1M Ant1 2402 0-Reference



BLE 1M Ant1 2402 30~1000



BLE 1M Ant1 2402 1000~26500



BLE 1M Ant1 2440 0-Reference



BLE 1M Ant1 2440 30~1000



BLE 1M Ant1 2440 1000~26500



BLE 1M Ant1 2480 0~Reference



BLE 1M Ant1 2480 30~1000



BLE 1M Ant1 2480 1000~26500



BLE 2M Ant1 2402 0~Reference





BLE 2M Ant1 2440 30~1000



BLE 2M Ant1 2440 1000~26500



BLE 2M Ant1 2480 0~Reference



BLE 2M Ant1 2480 30~1000



BLE 2M Ant1 2480 1000~26500



Band Edge

TestMode	Antenna	ChName	Channel	RefLevel[dBm]	Result[dBm]	Limit[dBm]	Verdict
BLE_1M	Ant1	Low	2402	2.18	-48.84	≤-17.82	PASS
		High	2480	2.90	-48.31	≤-17.1	PASS
BLE_2M	Ant1	Low	2402	1.84	-46.21	≤-18.16	PASS
		High	2480	3.14	-47.66	≤-16.86	PASS

BLE 1M Ant1 Low 2402



BLE 1M Ant1 High 2480



BLE 2M Ant1 Low 2402



BLE 2M Ant1 High 2480



Appendix B.5: Test Results of Radiated Spurious Emissions

Note:


- 1) This testing was carried out on different modulations, but only the worst case was presented in this report.
- 2) Testing was carried out within frequency range 9kHz to the tenth harmonics. The measurement results below 30MHz and 18GHz - 26.5GHz were greater than 20dB below the limit, so only the radiated spurious emissions from 30MHz to 18GHz were reported.

30 MHz to 1GHz

Test Report

EUT Information

EUT Name:	DJI RC Plus
Model:	RM700
Test Mode:	BLE 1M_Low channel
Order No/Sample No:	168339184/A003151089-004
Test Voltage:	Battery
Remark:	Temp 23 Humi:58%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

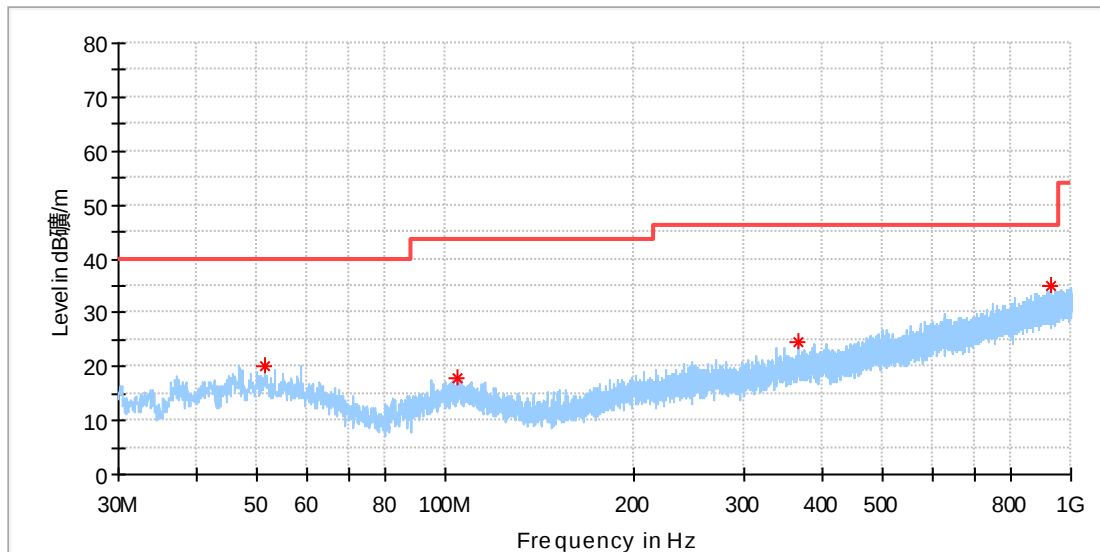

Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
51.291500	20.02	40.00	19.98	100.0	H	330.0	-18.3
104.253500	17.97	43.50	25.53	100.0	H	297.0	-18.8
367.172000	24.45	46.00	21.55	100.0	H	247.0	-14.5
931.954500	34.84	46.00	11.16	100.0	H	136.0	-4.7


Final_Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

Test Report

EUT Information

EUT Name: DJI RC Plus
Model: RM700
Test Mode: BLE 1M_Low channel
Order No/Sample No: 168339184/A003151089-004
Test Voltage: Battery
Remark: Temp 23 Humi:58%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

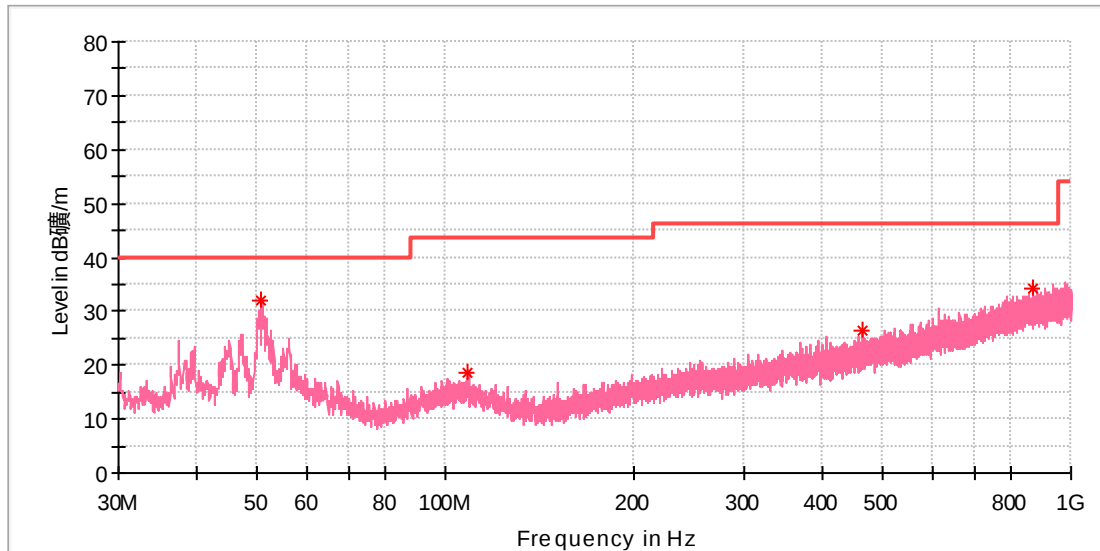

Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
50.855000	31.84	40.00	8.16	100.0	V	37.0	-18.3
108.764000	18.54	43.50	24.96	100.0	V	37.0	-19.0
463.299000	26.51	46.00	19.49	100.0	V	301.0	-12.6
867.207000	34.06	46.00	11.94	100.0	V	270.0	-5.3


Final_Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

Test Report

EUT Information

EUT Name: DJI RC Plus
Model: RM700
Test Mode: BLE 1M_High channel
Order No/Sample No: 168339184/A003151089-004
Test Voltage: Battery
Remark: Temp 23 Humi:58%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

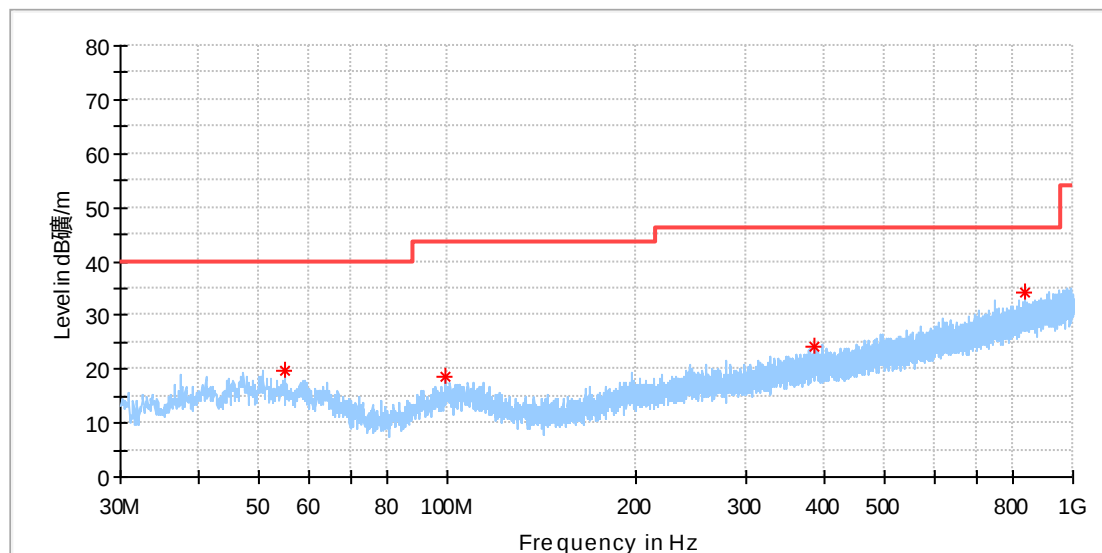

Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
55.074500	19.61	40.00	20.39	100.0	H	349.0	-18.5
99.403500	18.67	43.50	24.83	100.0	H	334.0	-19.1
386.766000	24.24	46.00	21.76	100.0	H	80.0	-14.0
839.416500	34.06	46.00	11.94	100.0	H	358.0	-5.7


Final_Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

Test Report

EUT Information

EUT Name: DJI RC Plus
Model: RM700
Test Mode: BLE 1M_High channel
Order No/Sample No: 168339184/A003151089-004
Test Voltage: Battery
Remark: Temp 23 Humi:58%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

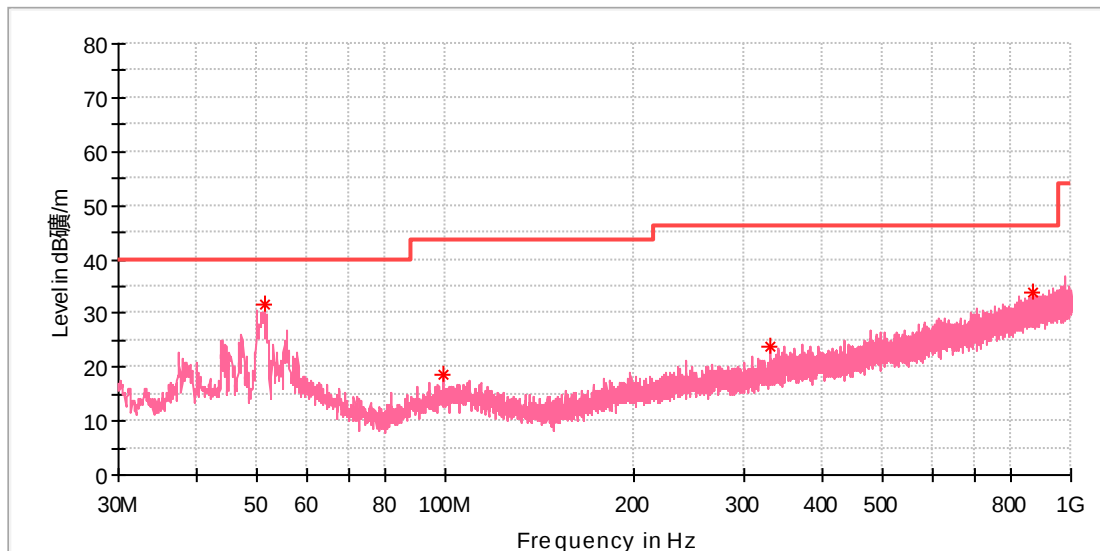

Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
51.388500	31.73	40.00	8.27	100.0	V	74.0	-18.3
99.403500	18.54	43.50	24.96	100.0	V	203.0	-19.1
330.118000	23.81	46.00	22.19	100.0	V	293.0	-15.4
865.946000	33.91	46.00	12.09	100.0	V	319.0	-5.3

Final_Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---


1GHz-18GHz

Note: The highest waveform in the figure is Bluetooth Fundamental.

Test Report

EUT Information

EUT Name:	DJI RC Plus
Model:	RM700
Test Mode:	BLE 1M_Low channel
Order No/Sample No:	168339184/A003151089-004
Test Voltage:	Battery
Remark:	Temp 23 Humi:58%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

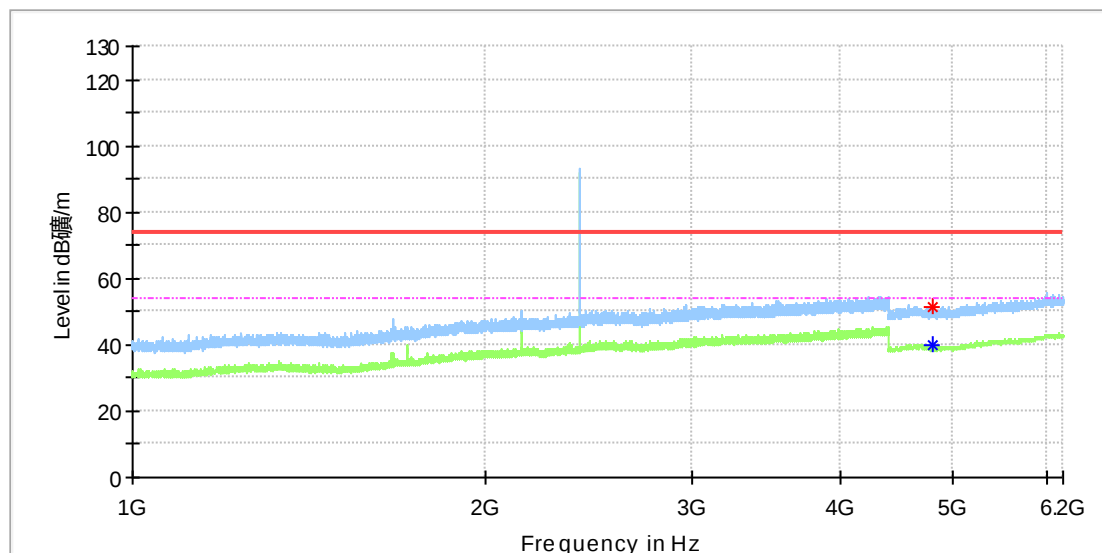

Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4804.500000	51.16	---	74.00	22.84	100.0	H	17.0	11.8
4808.000000	---	39.67	54.00	14.33	100.0	H	52.0	11.8


Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

Test Report

EUT Information

EUT Name: DJI RC Plus
Model: RM700
Test Mode: BLE 1M_Low channel
Order No/Sample No: 168339184/A003151089-004
Test Voltage: Battery
Remark: Temp 23 Humi:58%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

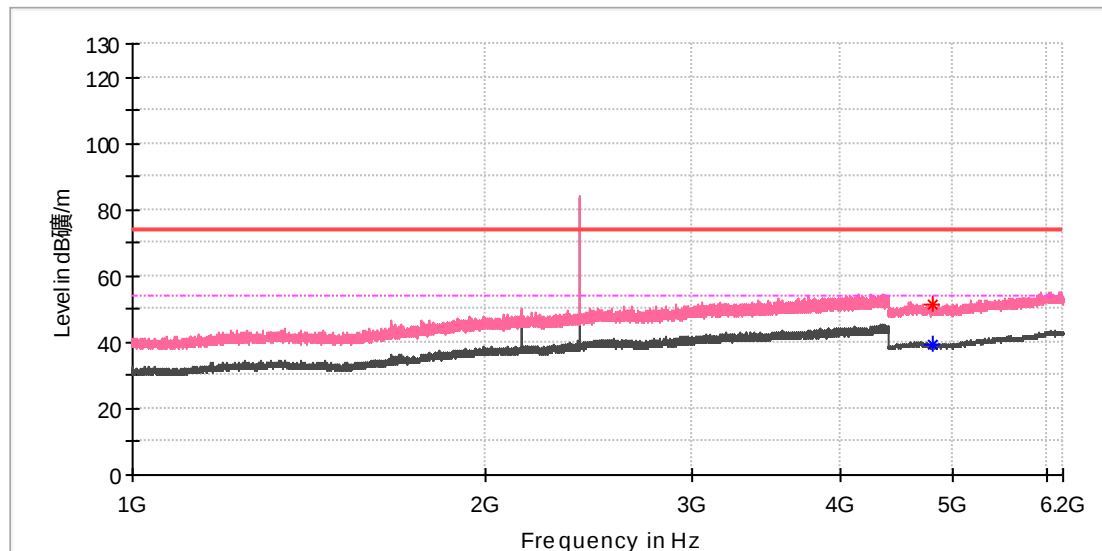

Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4801.500000	---	39.53	54.00	14.47	100.0	V	14.0	11.8
4803.000000	51.12	---	74.00	22.88	100.0	V	149.0	11.8


Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

Test Report

EUT Information

EUT Name:	DJI RC Plus
Model:	RM700
Test Mode:	BLE 1M_Low channel
Order No/Sample No:	168339184/A003151089-004
Test Voltage:	Battery
Remark:	Temp 23 Humi:58%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

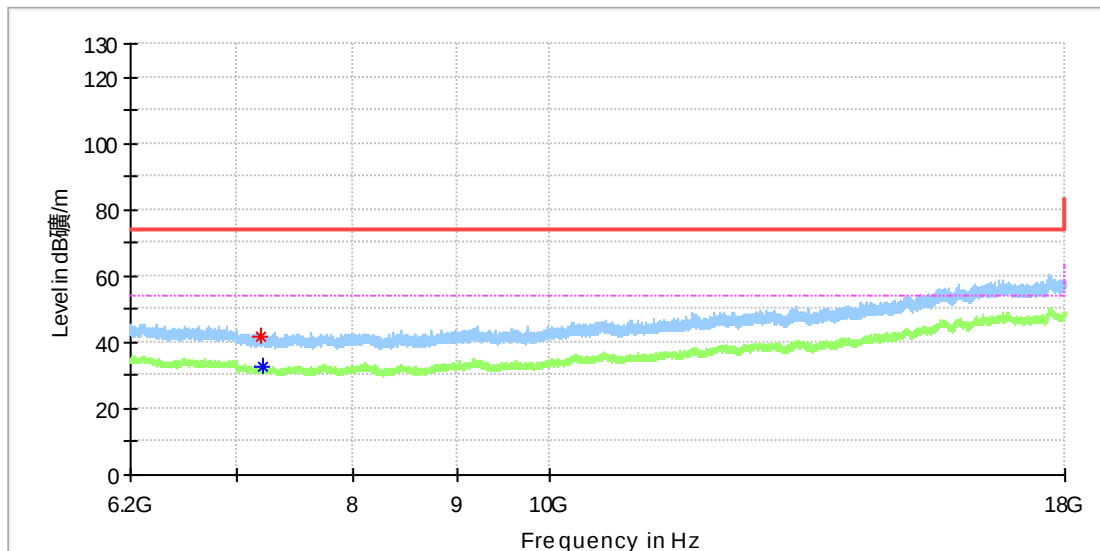

Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7200.050000	41.79	---	74.00	32.21	100.0	H	61.0	8.8
7216.275000	---	32.45	54.00	21.55	100.0	H	259.0	8.7


Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

Test Report

EUT Information

EUT Name:	DJI RC Plus
Model:	RM700
Test Mode:	BLE 1M_Low channel
Order No/Sample No:	168339184/A003151089-004
Test Voltage:	Battery
Remark:	Temp 23 Humi:58%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

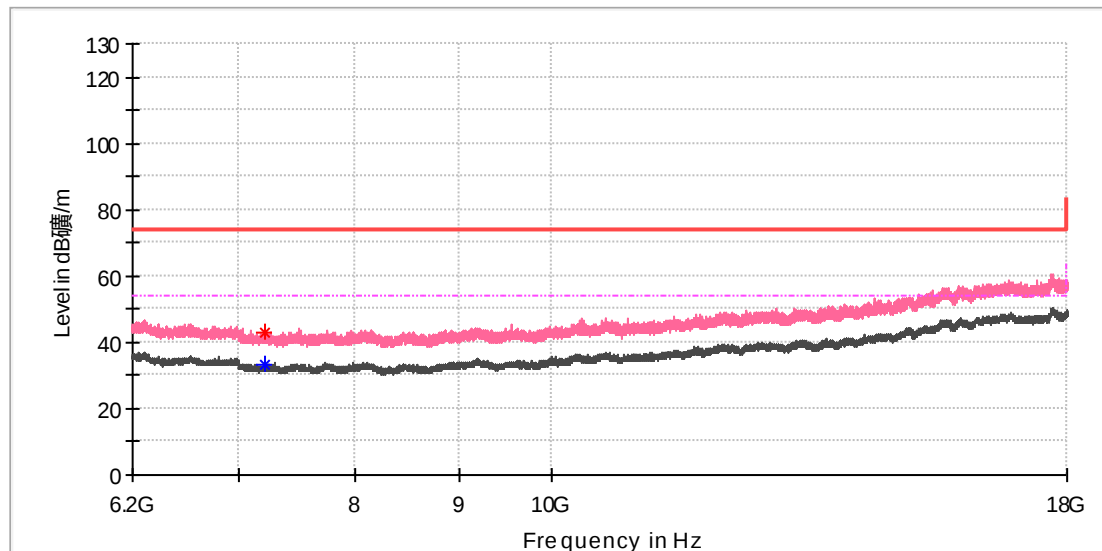

Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7207.916667	---	33.49	54.00	20.51	100.0	V	308.0	8.8
7217.258333	42.79	---	74.00	31.21	100.0	V	182.0	8.7


Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

Test Report

EUT Information

EUT Name: DJI RC Plus
Model: RM700
Test Mode: BLE 1M_Mid channel
Order No/Sample No: 168339184/A003151089-004
Test Voltage: Battery
Remark: Temp 23 Humi:58%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

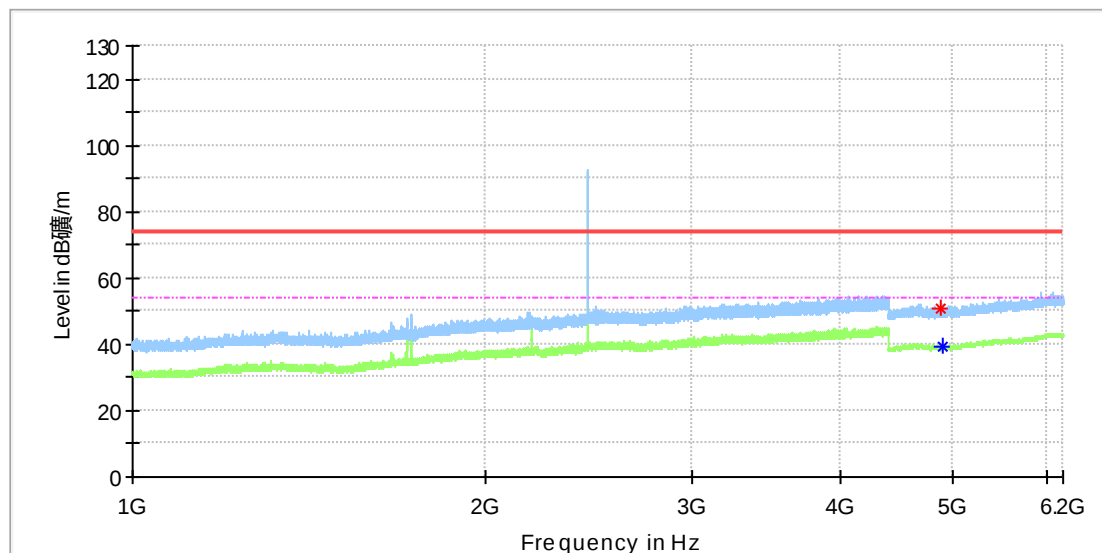

Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4880.000000	50.54	---	74.00	23.46	100.0	H	136.0	11.8
4890.000000	---	39.18	54.00	14.82	100.0	H	188.0	11.8


Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

Test Report

EUT Information

EUT Name:	DJI RC Plus
Model:	RM700
Test Mode:	BLE 1M_Mid channel
Order No/Sample No:	168339184/A003151089-004
Test Voltage:	Battery
Remark:	Temp 23 Humi:58%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

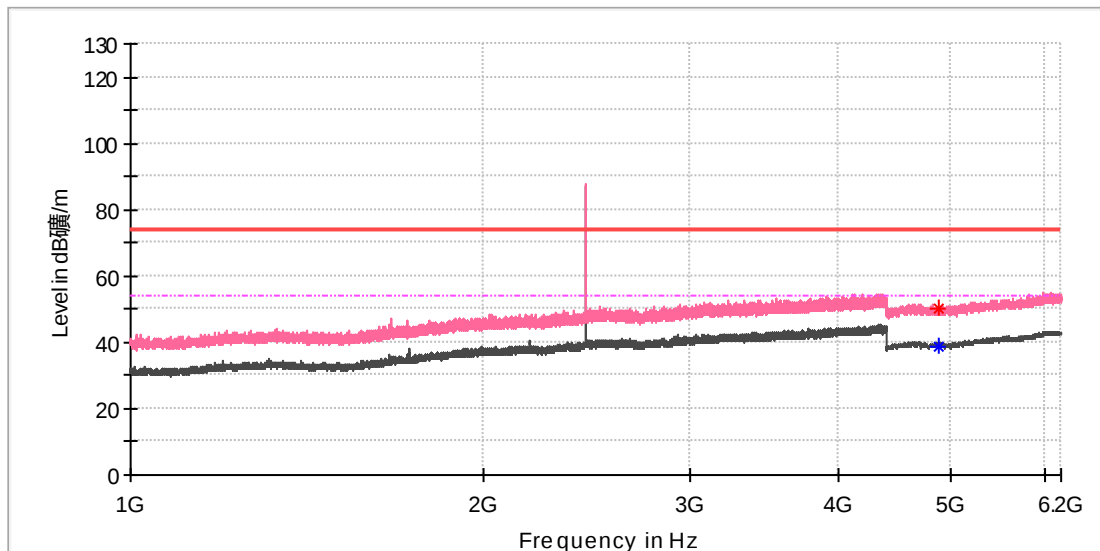

Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4879.500000	---	38.95	54.00	15.05	100.0	V	228.0	11.8
4882.500000	50.12	---	74.00	23.88	100.0	V	311.0	11.8


Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

Test Report

EUT Information

EUT Name:	DJI RC Plus
Model:	RM700
Test Mode:	BLE 1M_Mid channel
Order No/Sample No:	168339184/A003151089-004
Test Voltage:	Battery
Remark:	Temp 23 Humi:58%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

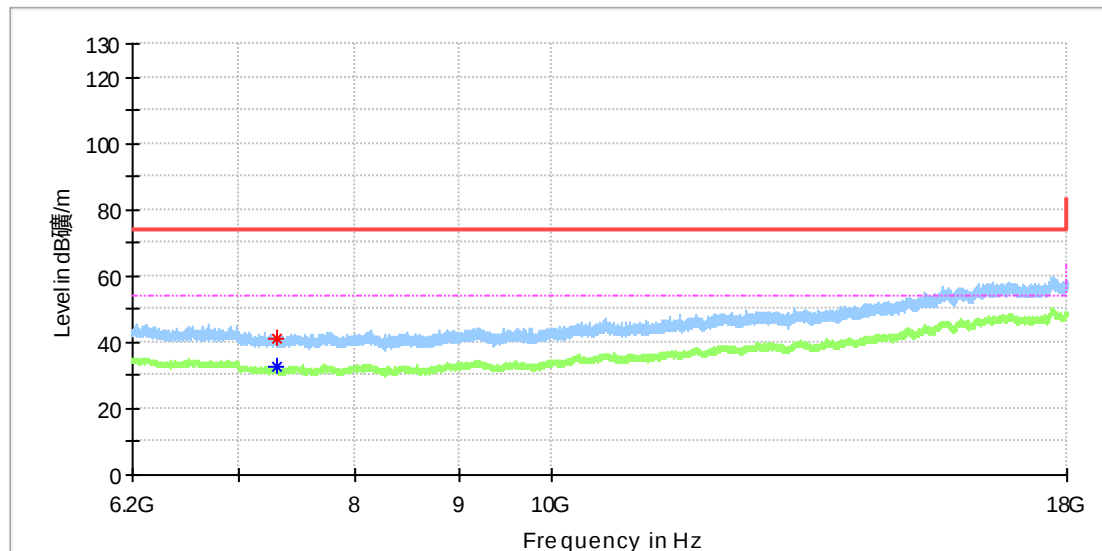

Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7302.808333	---	32.86	54.00	21.14	100.0	H	5.0	8.3
7310.183333	41.08	---	74.00	32.92	100.0	H	171.0	8.2


Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

Test Report

EUT Information

EUT Name: DJI RC Plus
Model: RM700
Test Mode: BLE 1M_Mid channel
Order No/Sample No: 168339184/A003151089-004
Test Voltage: Battery
Remark: Temp 23 Humi:58%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

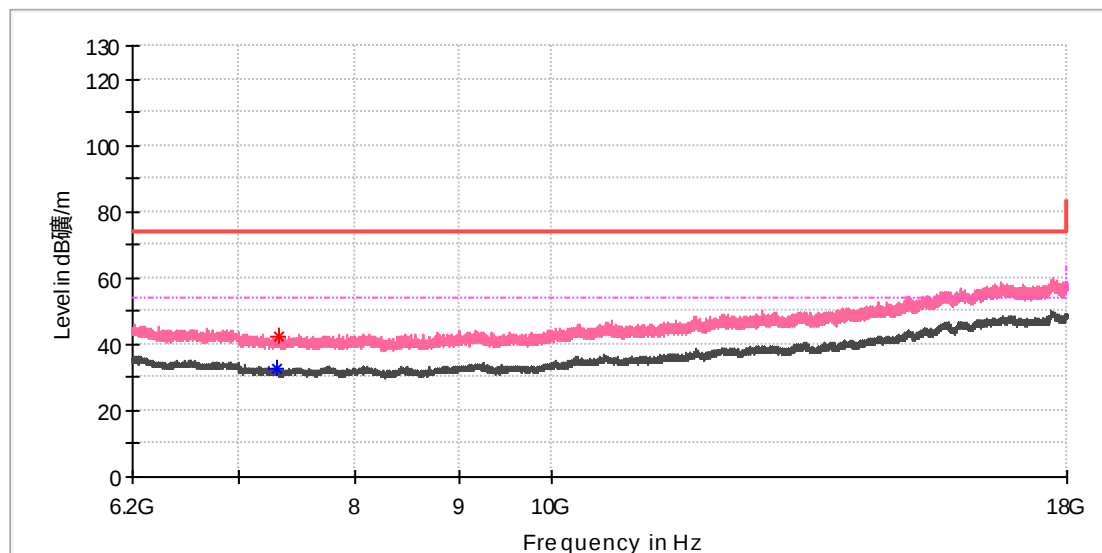

Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7305.266667	---	32.58	54.00	21.42	100.0	V	22.0	8.3
7324.933333	42.08	---	74.00	31.92	100.0	V	22.0	8.2


Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

Test Report

EUT Information

EUT Name: DJI RC Plus
Model: RM700
Test Mode: BLE 1M_High channel
Order No/Sample No: 168339184/A003151089-004
Test Voltage: Battery
Remark: Temp 23 Humi:58%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

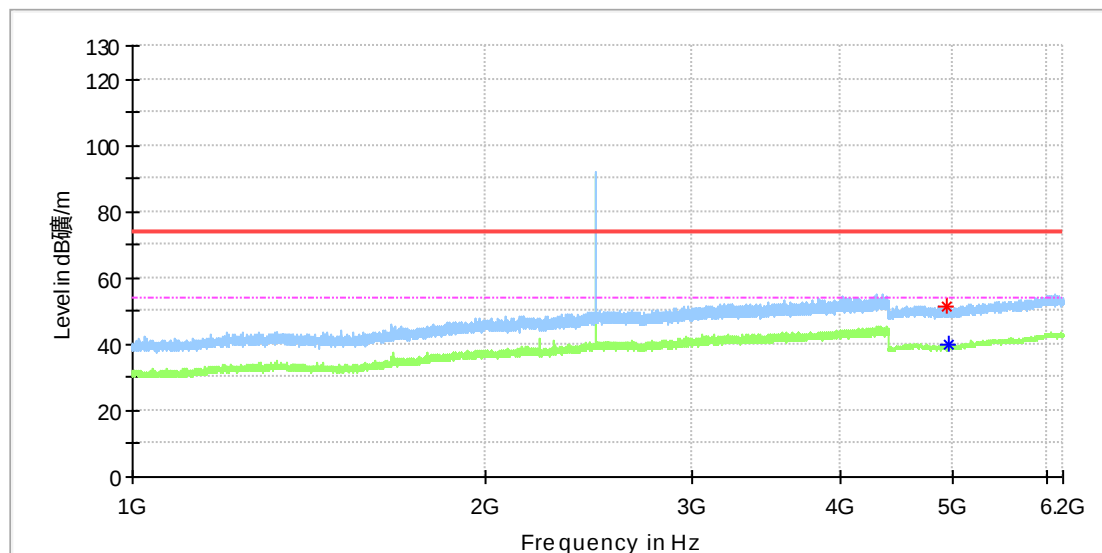

Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4943.500000	51.28	---	74.00	22.72	100.0	H	84.0	11.8
4949.500000	---	39.71	54.00	14.29	100.0	H	84.0	11.8


Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

Test Report

EUT Information

EUT Name: DJI RC Plus
Model: RM700
Test Mode: BLE 1M_High channel
Order No/Sample No: 168339184/A003151089-004
Test Voltage: Battery
Remark: Temp 23 Humi:58%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

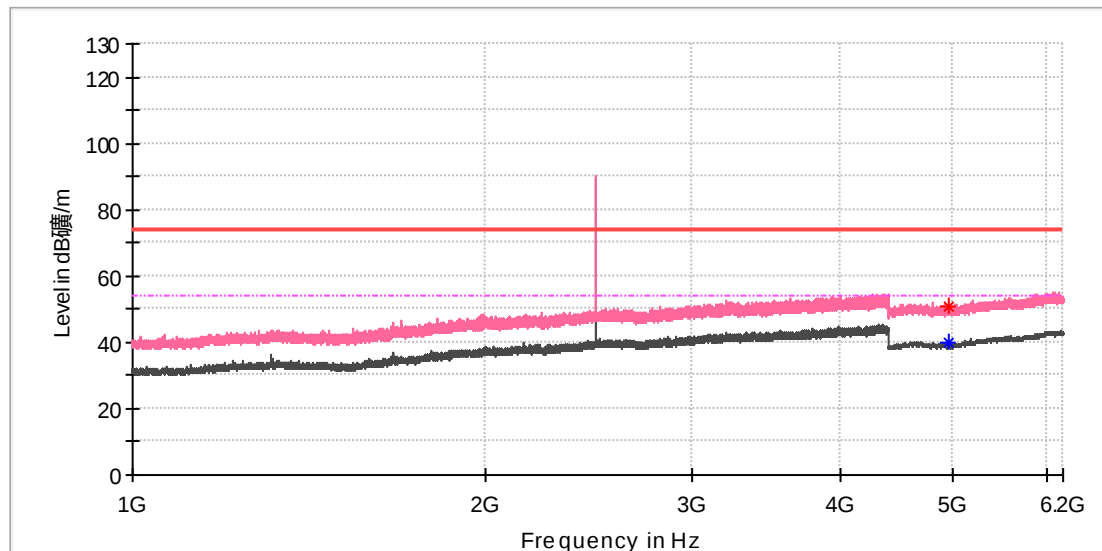

Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4953.000000	---	39.66	54.00	14.34	100.0	V	294.0	11.8
4955.500000	50.83	---	74.00	23.17	100.0	V	122.0	11.8


Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

Test Report

EUT Information

EUT Name: DJI RC Plus
Model: RM700
Test Mode: BLE 1M_High channel
Order No/Sample No: 168339184/A003151089-004
Test Voltage: Battery
Remark: Temp 23 Humi:58%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

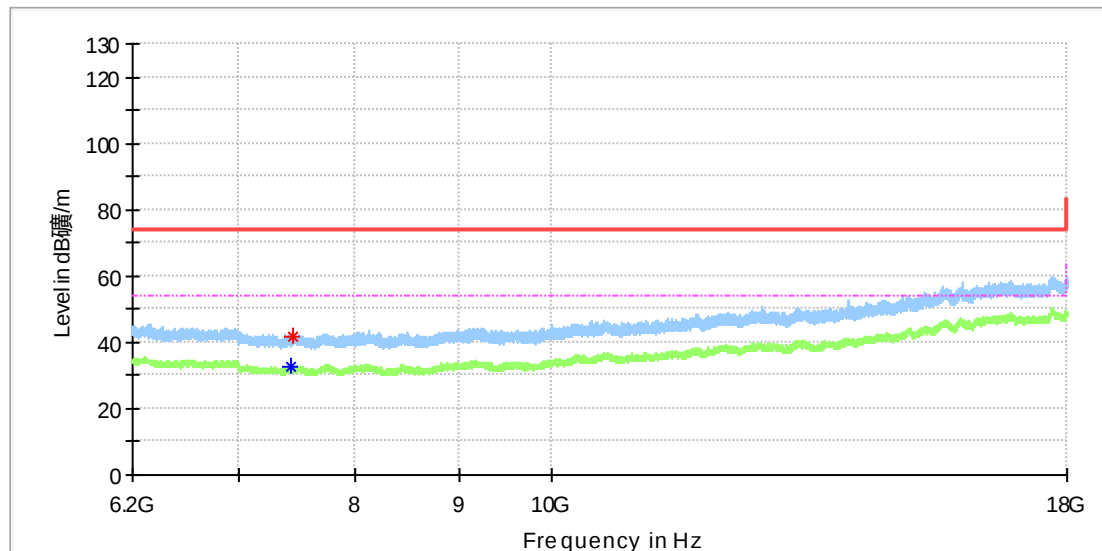

Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7433.591667	---	32.45	54.00	21.55	100.0	H	22.0	8.4
7446.866667	41.67	---	74.00	32.33	100.0	H	92.0	8.5


Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

Test Report

EUT Information

EUT Name:	DJI RC Plus
Model:	RM700
Test Mode:	BLE 1M_High channel
Order No/Sample No:	168339184/A003151089-004
Test Voltage:	Battery
Remark:	Temp 23 Humi:58%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

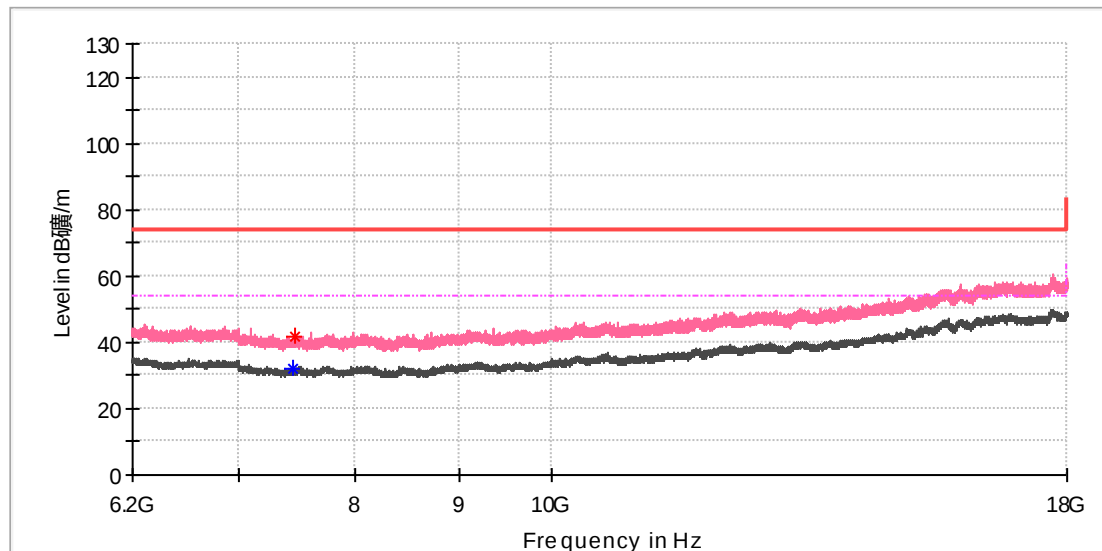

Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7449.325000	---	31.94	54.00	22.06	100.0	V	158.0	8.5
7456.700000	41.59	---	74.00	32.41	100.0	V	330.0	8.5

Final_Result


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

Appendix B.6: Test Results of Radiated Emissions in Restricted Bands

Test Report

EUT Information

EUT Name: DJI RC Plus
Model: RM700
Test Mode: BLE 1M_Low channel
Order No/Sample No: 168339184/A003151089-004
Test Voltage: Battery
Remark: Temp 23 Humi:58%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

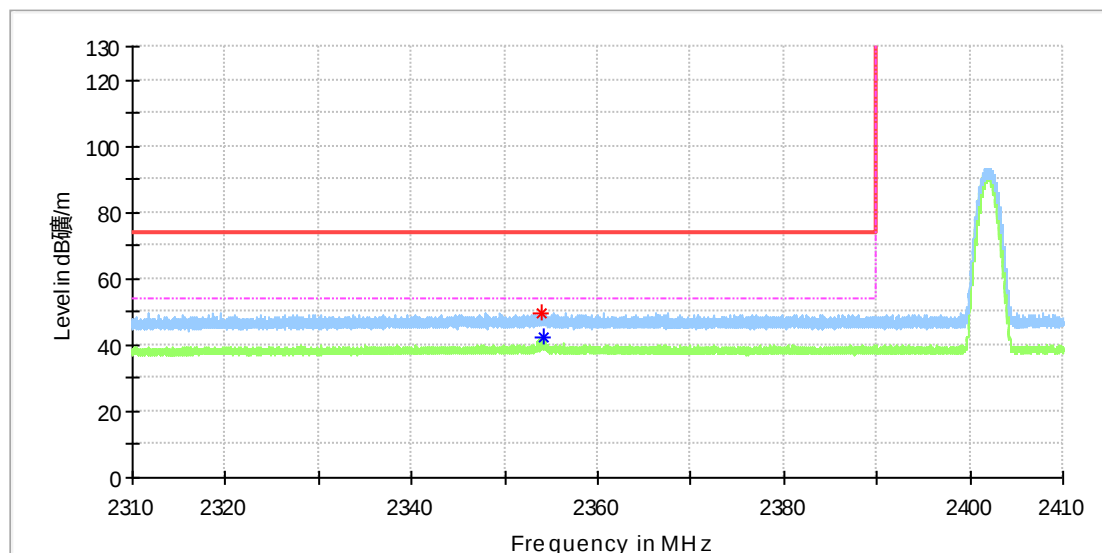

Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2354.025000	49.79	---	74.00	24.21	100.0	H	263.0	6.9
2354.115000	---	42.30	54.00	11.70	100.0	H	292.0	6.9


Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

Test Report

EUT Information

EUT Name:	DJI RC Plus
Model:	RM700
Test Mode:	BLE 1M_Low channel
Order No/Sample No:	168339184/A003151089-004
Test Voltage:	Battery
Remark:	Temp 23 Humi:58%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

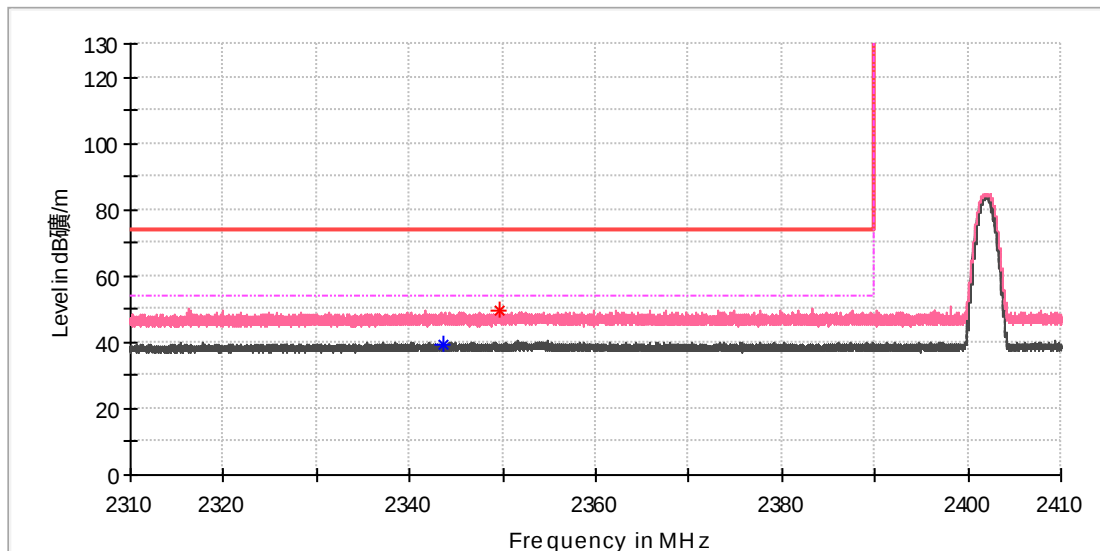

Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2343.525000	---	39.46	54.00	14.54	100.0	V	272.0	6.9
2349.615000	49.87	---	74.00	24.13	100.0	V	131.0	6.9


Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

Test Report

EUT Information

EUT Name:	DJI RC Plus
Model:	RM700
Test Mode:	BLE 1M_High channel
Order No/Sample No:	168339184/A003151089-004
Test Voltage:	Battery
Remark:	Temp 23 Humi:58%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

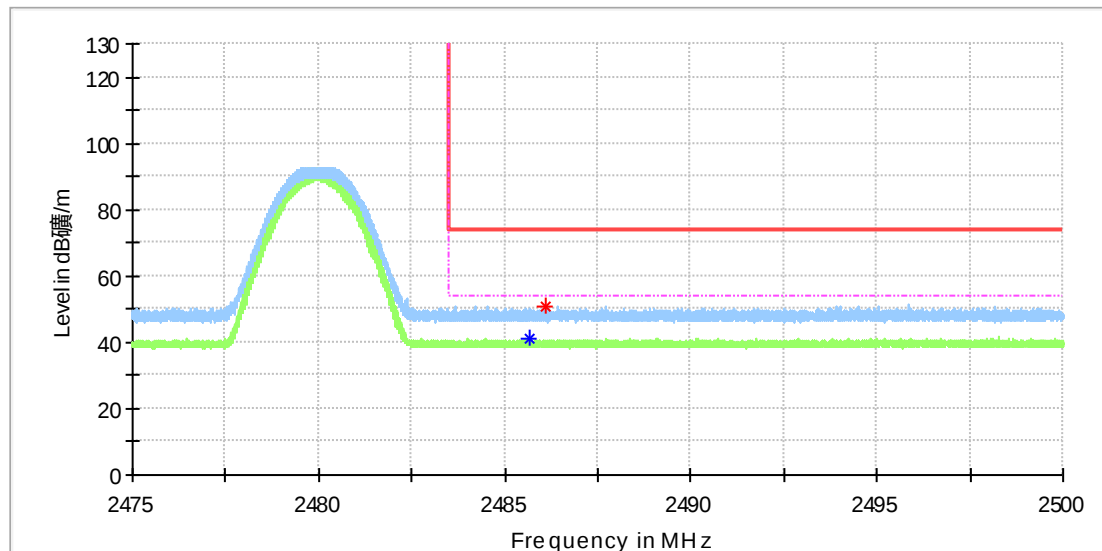

Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2485.675000	---	41.00	54.00	13.00	100.0	H	167.0	7.4
2486.113750	50.88	---	74.00	23.12	100.0	H	340.0	7.4


Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

Test Report

EUT Information

EUT Name:	DJI RC Plus
Model:	RM700
Test Mode:	BLE 1M_High channel
Order No/Sample No:	168339184/A003151089-004
Test Voltage:	Battery
Remark:	Temp 23 Humi:58%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

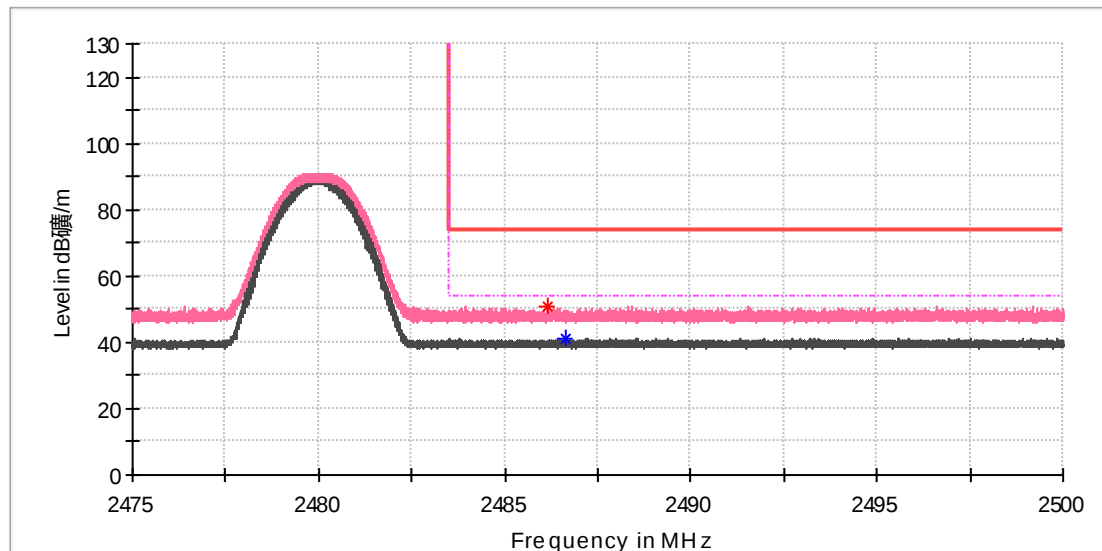

Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2486.178750	50.55	---	74.00	23.45	100.0	V	0.0	7.4
2486.636250	---	40.85	54.00	13.15	100.0	V	342.0	7.4

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

Frequency (MHz)	QuasiPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
-----------------	------------------	----------------	--------------	-------------	-----------------	-----------------	------	------------

