

Antenna Specification

Specifications Summary

ITEM	SPEC.	
	2.4GHz	
Center Frequency	2402 MHz	1.23 dBi
	2442 MHz	1.43 dBi
	2484 MHz	1.25 dBi
MAX. GAIN	1.43 dBi	
Impedance	50Ω	

ITEM	SPEC.	
	5 GHz	
Center Frequency	5150 MHz	0.75 dBi
	5300 MHz	1.53 dBi
	5500 MHz	3.12dBi
	5800 MHz	1.77dBi
MAX. GAIN	3.12dBi	
Impedance	50Ω	

Antenna Photo & Length

天线类型/
ANT Type:

PCB

天线型号/
ANT Model:


T74LTE BT/Wi-Fi ANT

制造商/
Manufactory:

YEALINK(XIAMEN) NETWORK TECHNOLOGY CO.,LTD.


No.666 Hu'an Rd,Huli District Xiamen City, Fujian, P.R. China

天线图/ANT Photo

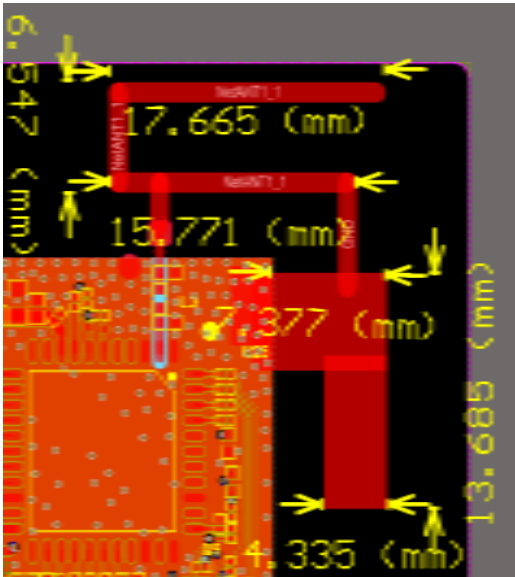


2402MHz

3D Antenna pattern

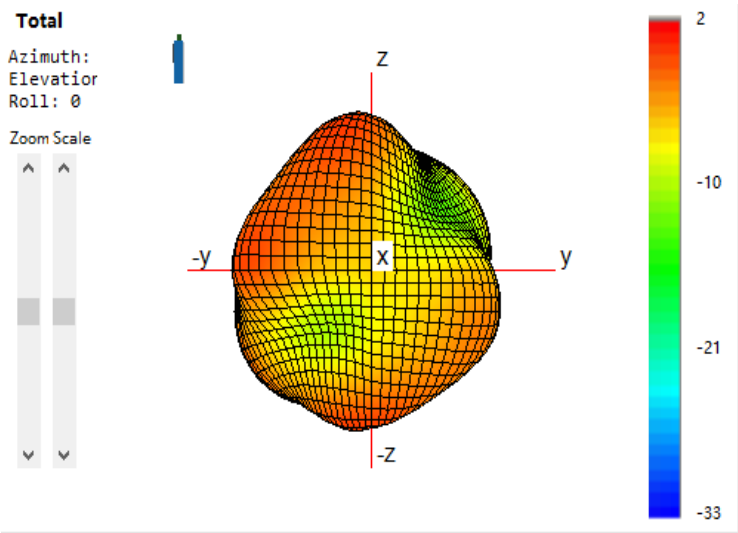


2442MHz

3D Antenna pattern

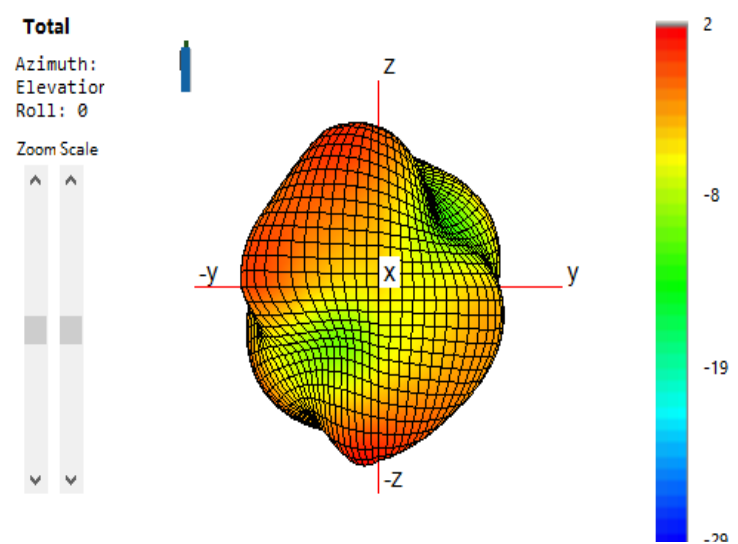

2484MHz


3D Antenna pattern

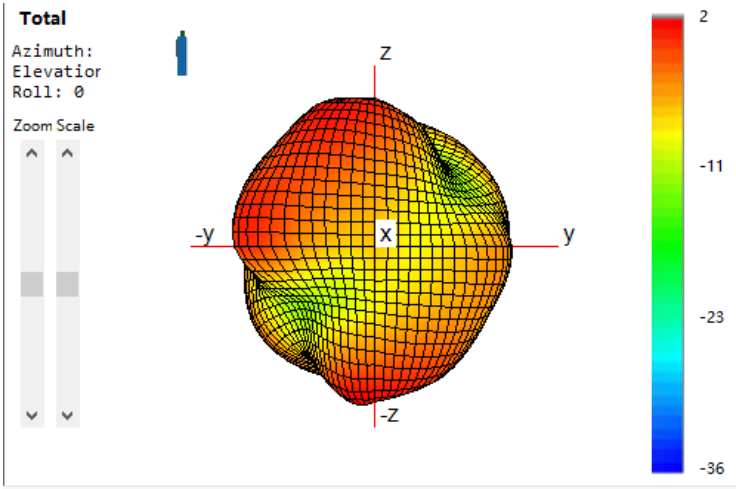

Point Values	Minimum Gain (dB)	Maximum Gain (dB)	Average Gain (dB)
Frequency (MHz)			
2402	-12.46629357	1.229078072	-4.25755
2442	-11.68901133	1.42687489	-3.76505
2484	-11.69318882	1.248015949	-3.62412

5150MHz


3D Antenna pattern

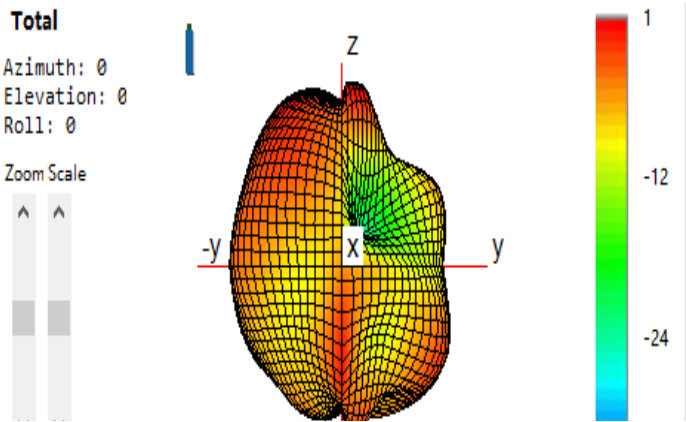




5300MHz

3D Antenna pattern

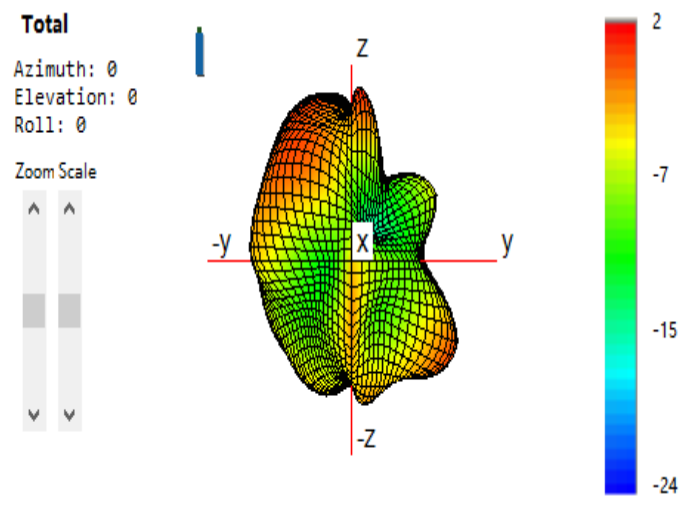

5500MHz


3D Antenna pattern

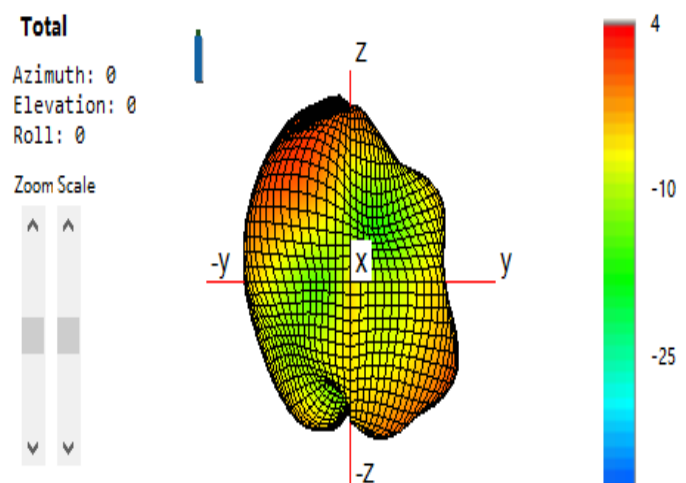



5800MHz

3D Antenna pattern

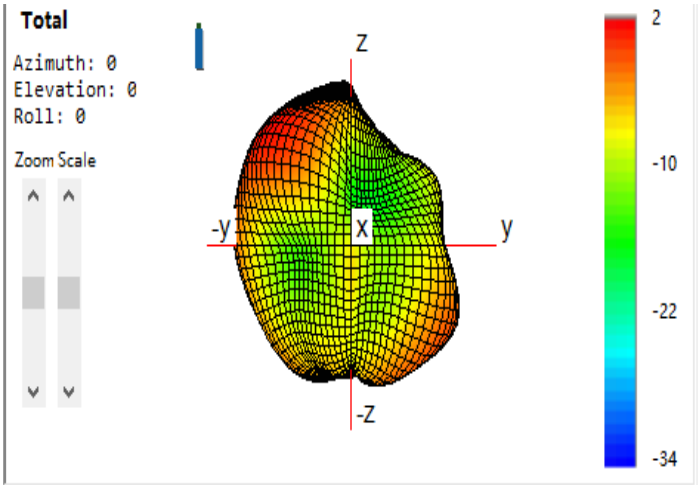

Point Values	Minimum Gain (dB)	Maximum Gain (dB)	Average Gain (dB)
Frequency (MHz)			
5150	-24.27412287	0.752376474	-4.81219
5300	-16.18629654	1.533428441	-4.51009
5500	-15.3542199	3.116692292	-3.48276
5800	-16.76087437	1.771399472	-4.13152