



Test Report

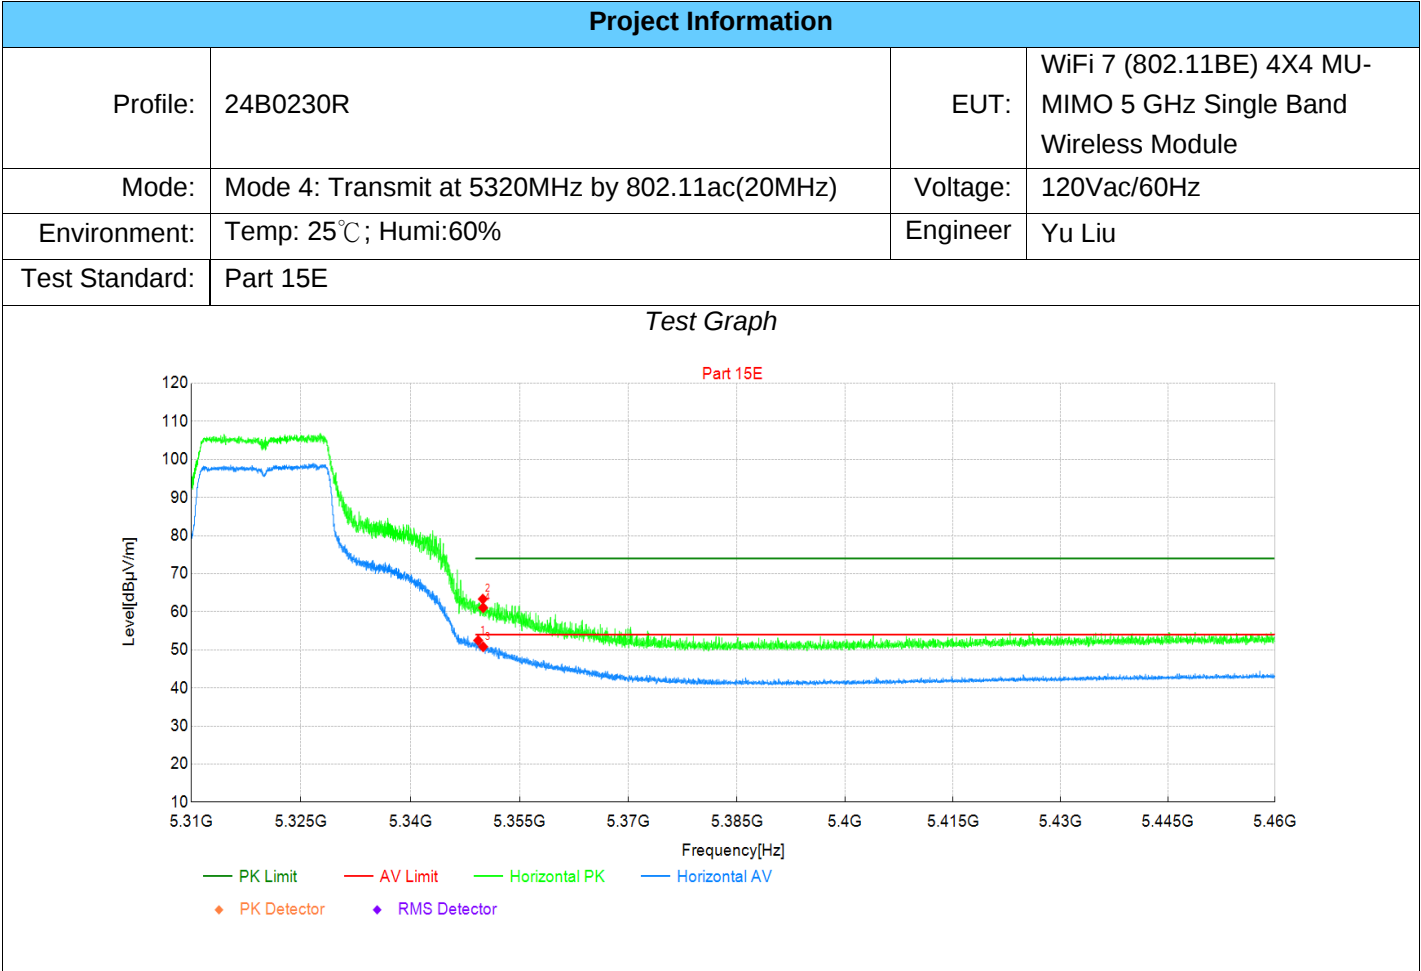

Suspected Data List									
NO	Frequency [MHz]	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Det	Pol	Verdict
1	5349	36.77	52.48	15.71	54.00	1.52	AV	Horizo	PASS
2	5350	47.63	63.34	15.71	74.00	10.66	PK	Horizo	PASS
3	5350	35.10	50.81	15.71	54.00	3.19	AV	Horizo	PASS
4	5350	45.36	61.07	15.71	74.00	12.93	PK	Horizo	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level


Test Report

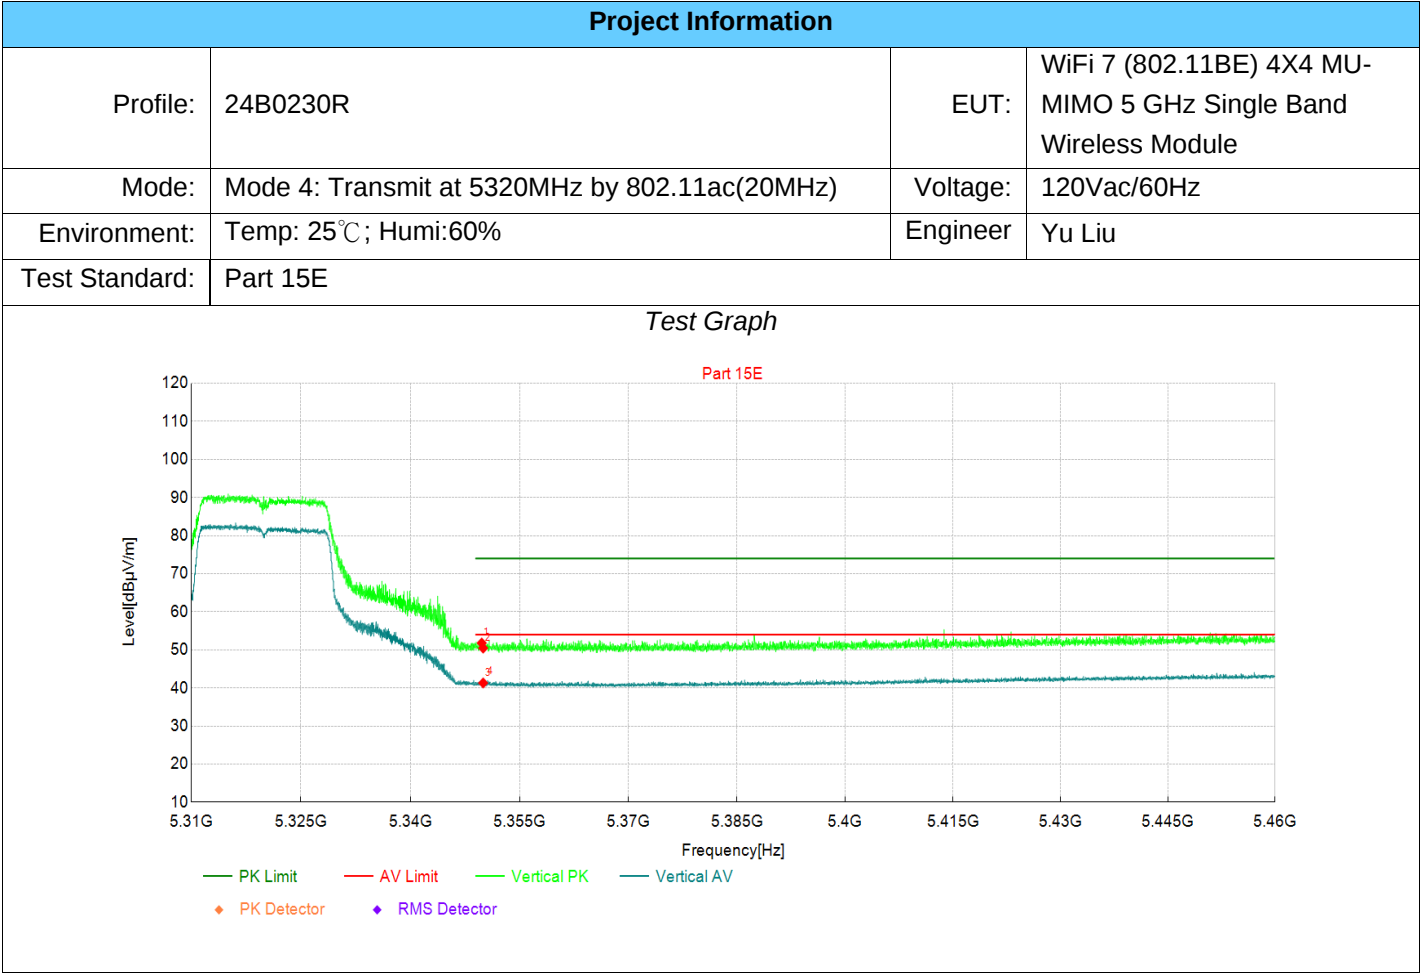

Suspected Data List									
NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5350	36.09	51.80	15.71	74.00	22.20	PK	Vertic	PASS
2	5350	34.75	50.46	15.71	74.00	23.54	PK	Vertic	PASS
3	5350	25.59	41.30	15.71	54.00	12.70	AV	Vertic	PASS
4	5350	26.05	41.76	15.71	54.00	12.24	AV	Vertic	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level


Test Report

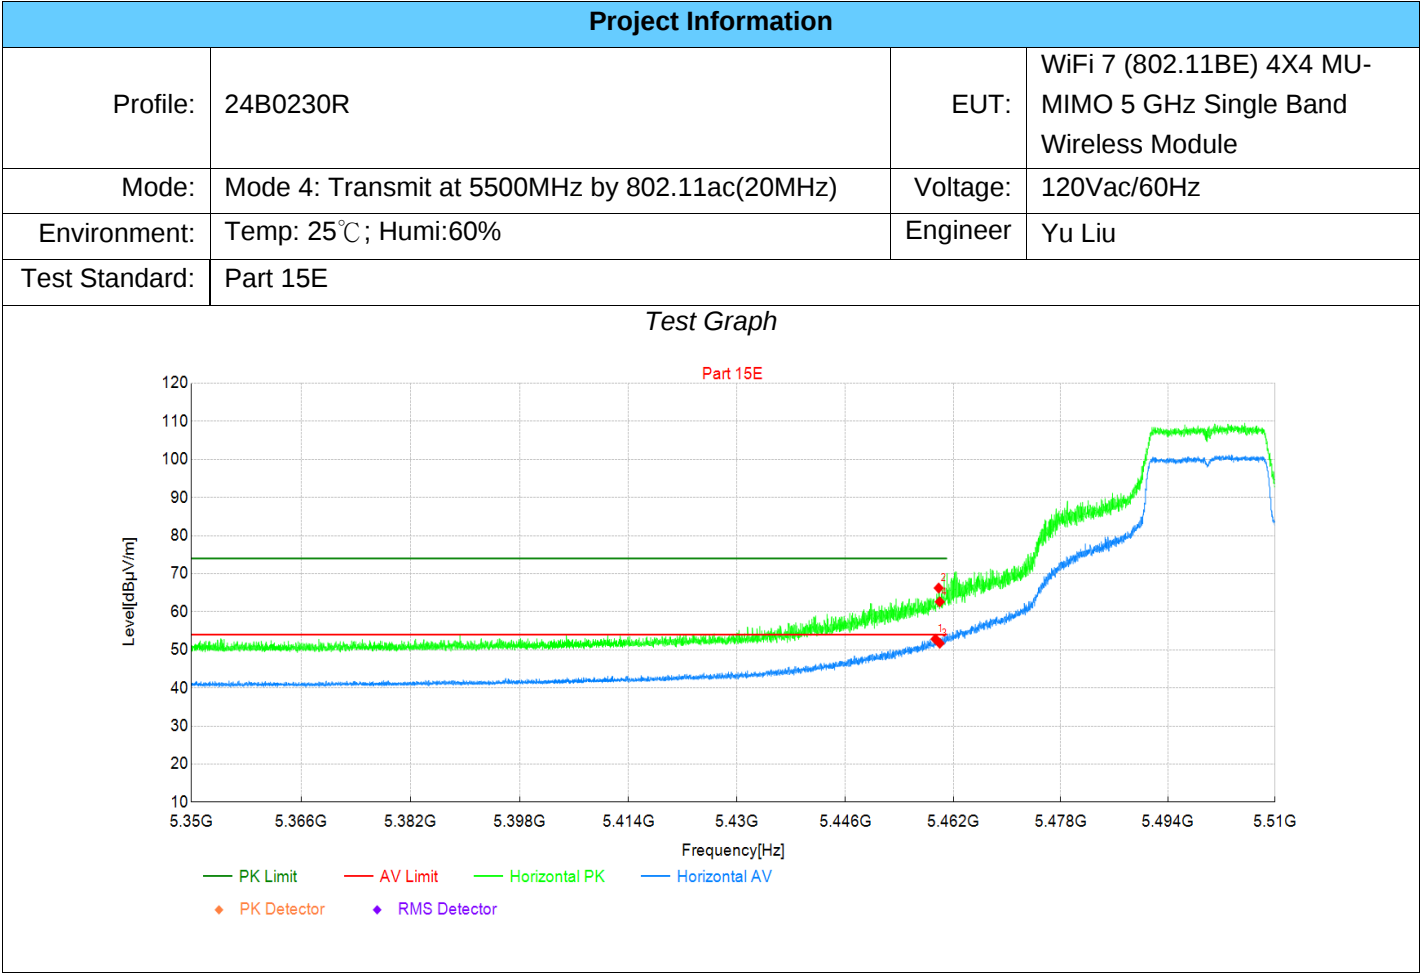

Suspected Data List									
NO	Frequency [MHz]	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Det	Pol	Verdict
1	5459	36.50	52.84	16.34	54.00	1.16	AV	Horizo	PASS
2	5460	49.90	66.24	16.34	74.00	7.76	PK	Horizo	PASS
3	5460	35.38	51.72	16.34	54.00	2.28	AV	Horizo	PASS
4	5460	46.28	62.62	16.34	74.00	11.38	PK	Horizo	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level


Test Report

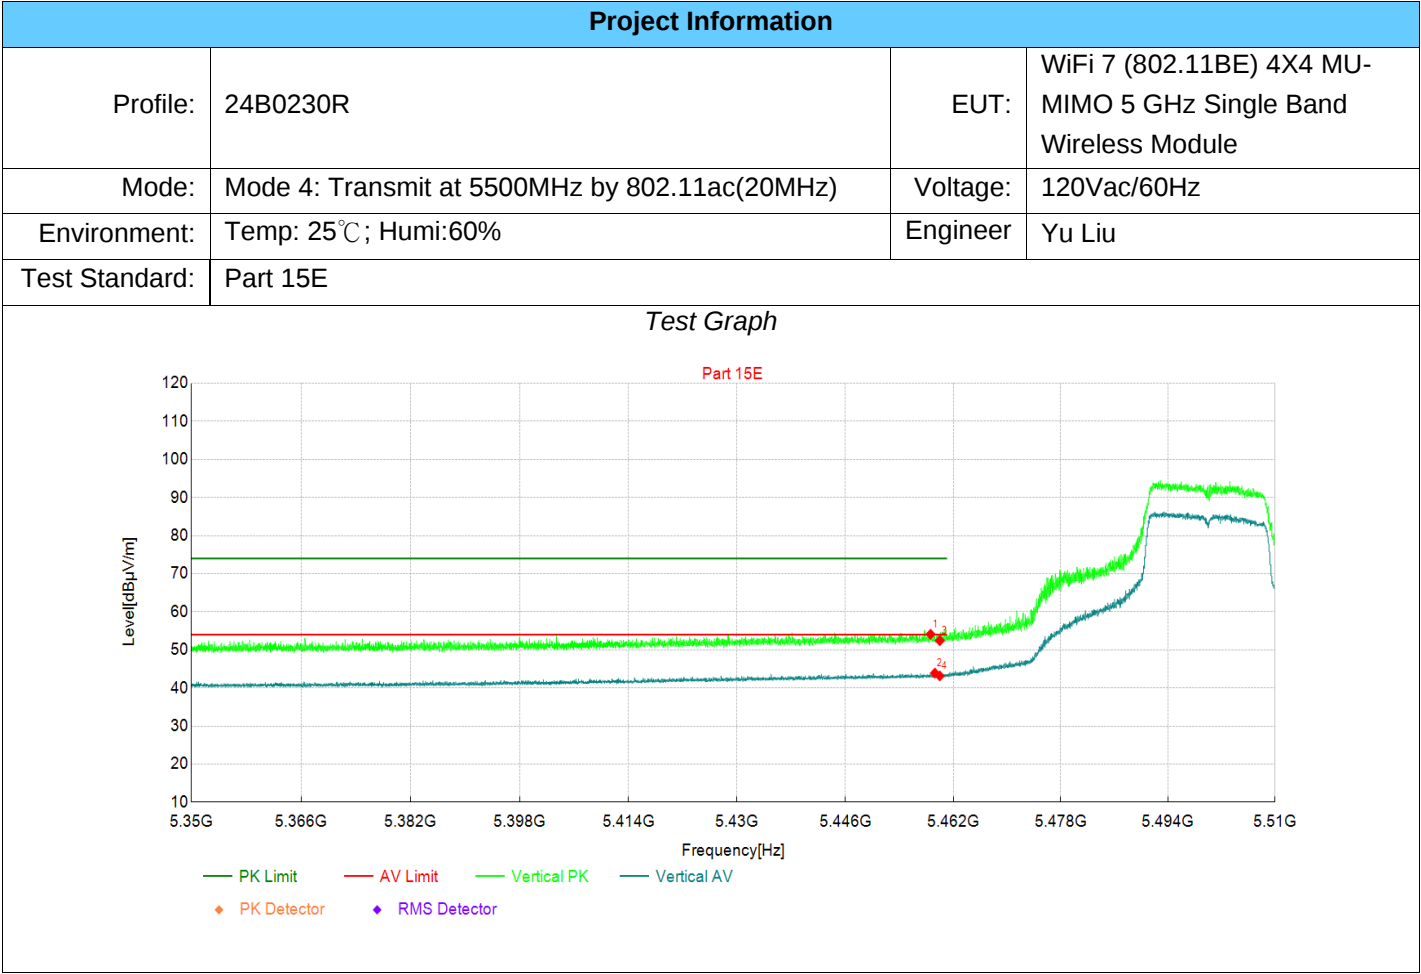

Suspected Data List									
NO	Frequency [MHz]	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Det	Pol	Verdict
1	5459	37.78	54.10	16.32	74.00	19.90	PK	Vertic	PASS
2	5459	27.54	43.88	16.34	54.00	10.12	AV	Vertic	PASS
3	5460	36.08	52.42	16.34	74.00	21.58	PK	Vertic	PASS
4	5460	26.82	43.16	16.34	54.00	10.84	AV	Vertic	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level

Test Report

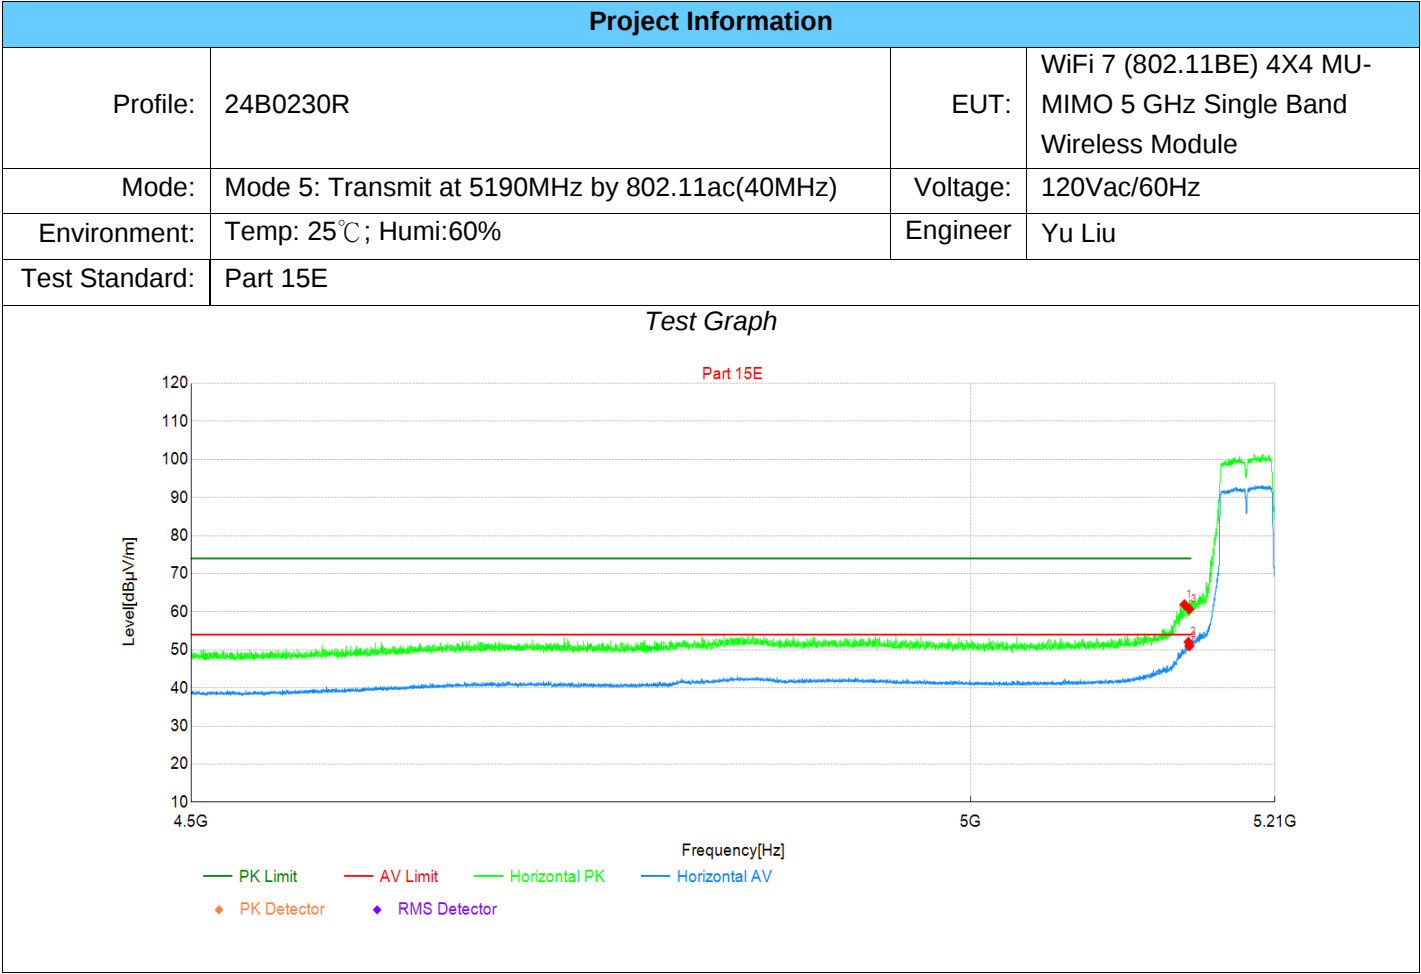

Suspected Data List									
NO	Frequency [MHz]	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Det	Pol	Verdict
1	5147	46.81	61.90	15.09	74.00	12.10	PK	Horizo	PASS
2	5149	36.92	52.03	15.11	54.00	1.97	AV	Horizo	PASS
3	5150	45.58	60.69	15.11	74.00	13.31	PK	Horizo	PASS
4	5150	35.90	51.01	15.11	54.00	2.99	AV	Horizo	PASS


Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level

Test Report

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 5: Transmit at 5190MHz by 802.11ac(40MHz)	Voltage:	120Vac/60Hz
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	Part 15E		

Test Graph

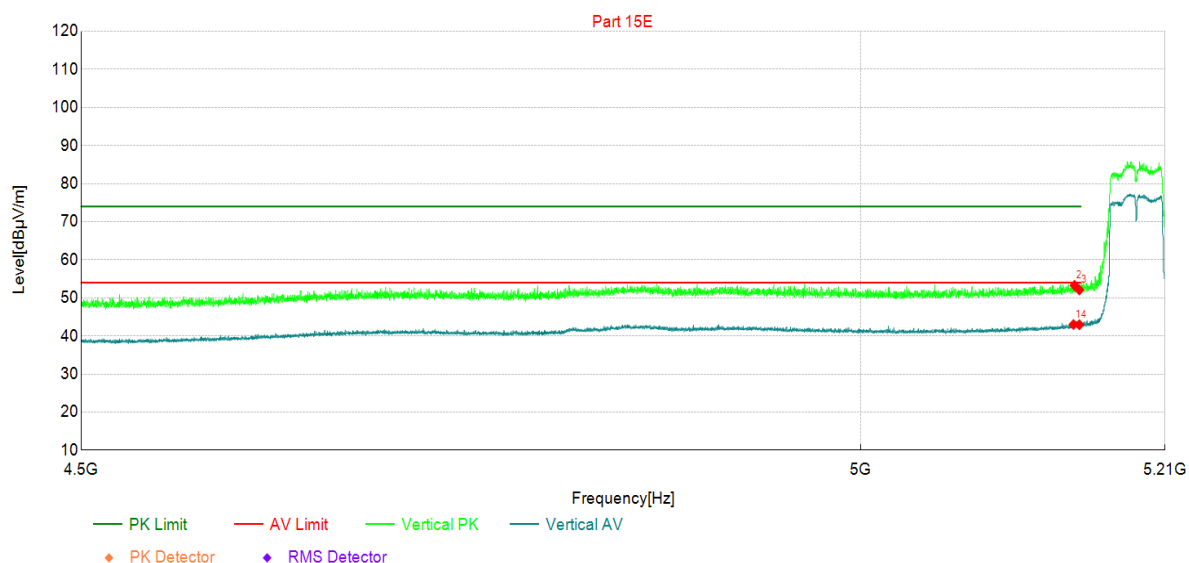

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5146	27.91	43.00	15.09	54.00	11.00	AV	Vertic	PASS
2	5147	38.18	53.27	15.09	74.00	20.73	PK	Vertic	PASS
3	5150	36.96	52.07	15.11	74.00	21.93	PK	Vertic	PASS
4	5150	27.84	42.95	15.11	54.00	11.05	AV	Vertic	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

Test Report

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 5: Transmit at 5310MHz by 802.11ac(40MHz)	Voltage:	120Vac/60Hz
Environment:	Temp: 25°C; Humi:60%	Engineer	Yu Liu
Test Standard:	Part 15E		

Test Graph

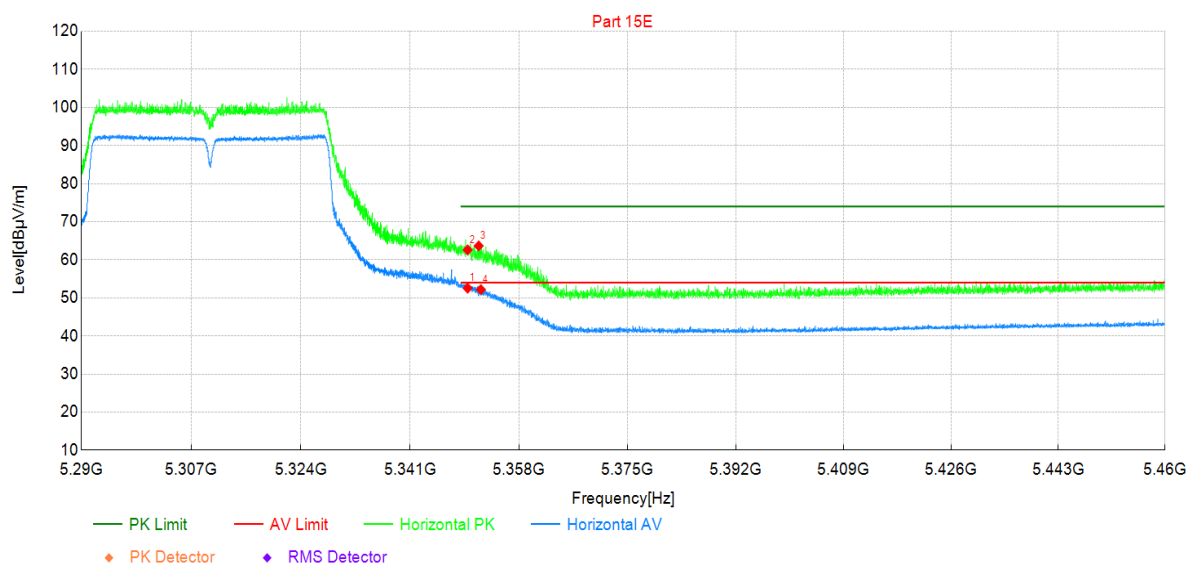


Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5350	36.83	52.54	15.71	54.00	1.46	AV	Horizo	PASS
2	5350	46.89	62.60	15.71	74.00	11.40	PK	Horizo	PASS
3	5352	47.94	63.65	15.71	74.00	10.35	PK	Horizo	PASS
4	5352	36.45	52.16	15.71	54.00	1.84	AV	Horizo	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Test Report

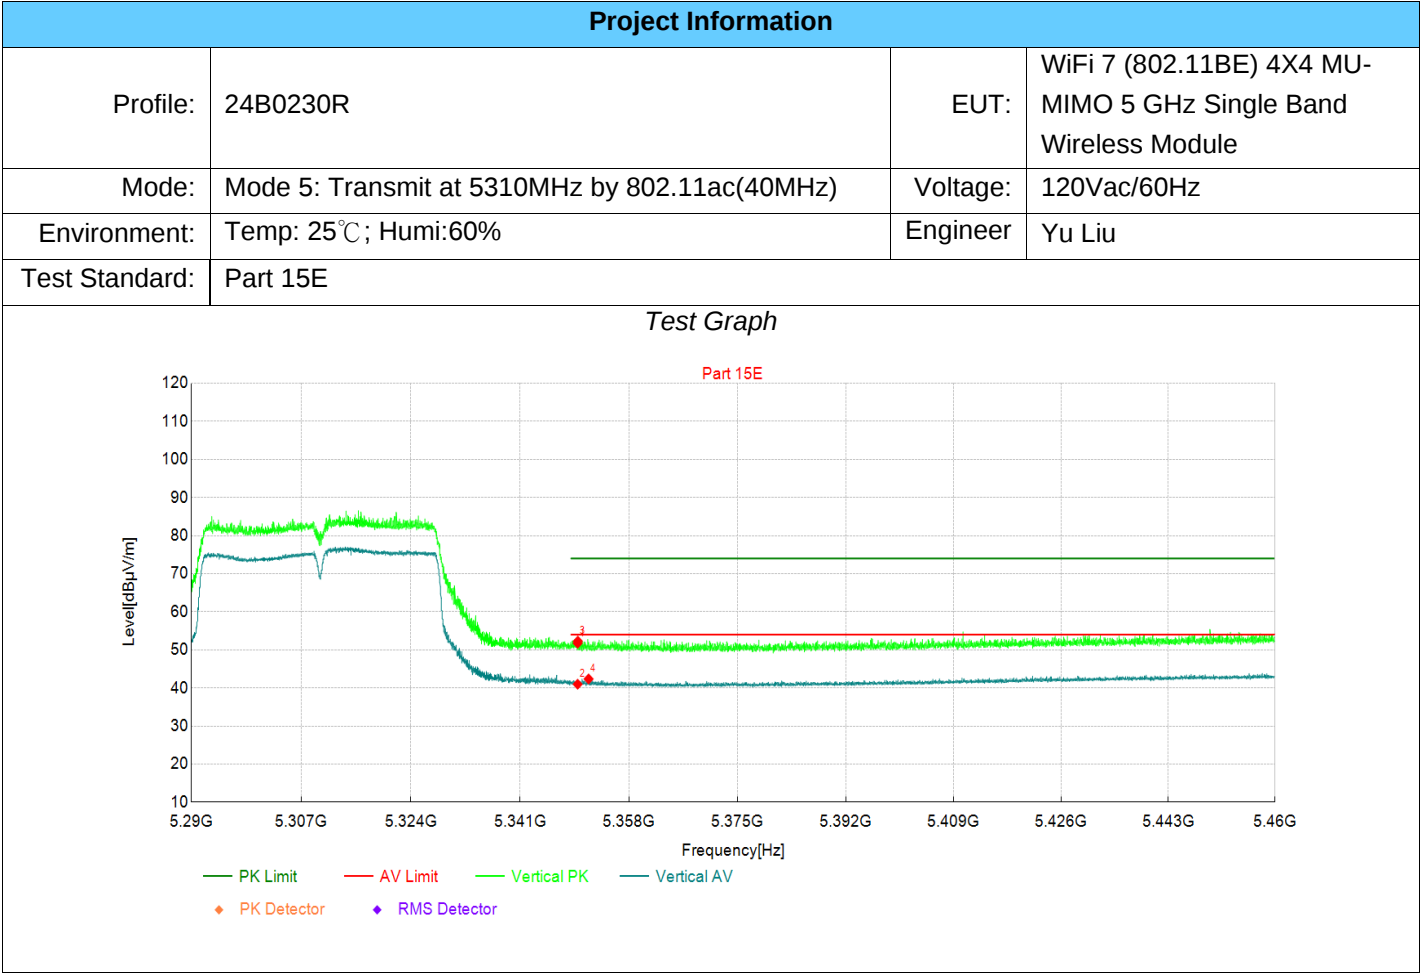

Suspected Data List									
NO	Frequency [MHz]	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Det	Pol	Verdict
1	5350	36.04	51.75	15.71	74.00	22.25	PK	Vertic	PASS
2	5350	25.26	40.97	15.71	54.00	13.03	AV	Vertic	PASS
3	5350	36.58	52.29	15.71	74.00	21.71	PK	Vertic	PASS
4	5352	26.64	42.35	15.71	54.00	11.65	AV	Vertic	PASS


Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level

Test Report

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 5: Transmit at 5510MHz by 802.11ac(40MHz)	Voltage:	120Vac/60Hz
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	Part 15E		

Test Graph

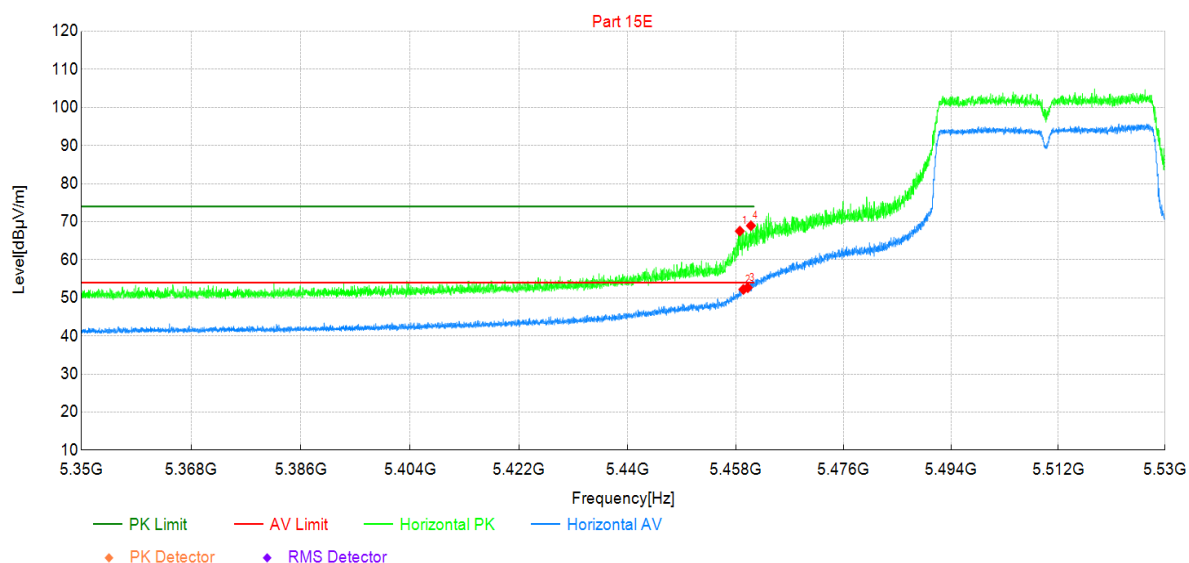


Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5459	51.21	67.53	16.32	74.00	6.47	PK	Horizo	PASS
2	5459	35.86	52.20	16.34	54.00	1.80	AV	Horizo	PASS
3	5460	36.34	52.68	16.34	54.00	1.32	AV	Horizo	PASS
4	5461	52.60	68.95	16.35	74.00	5.05	PK	Horizo	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Test Report

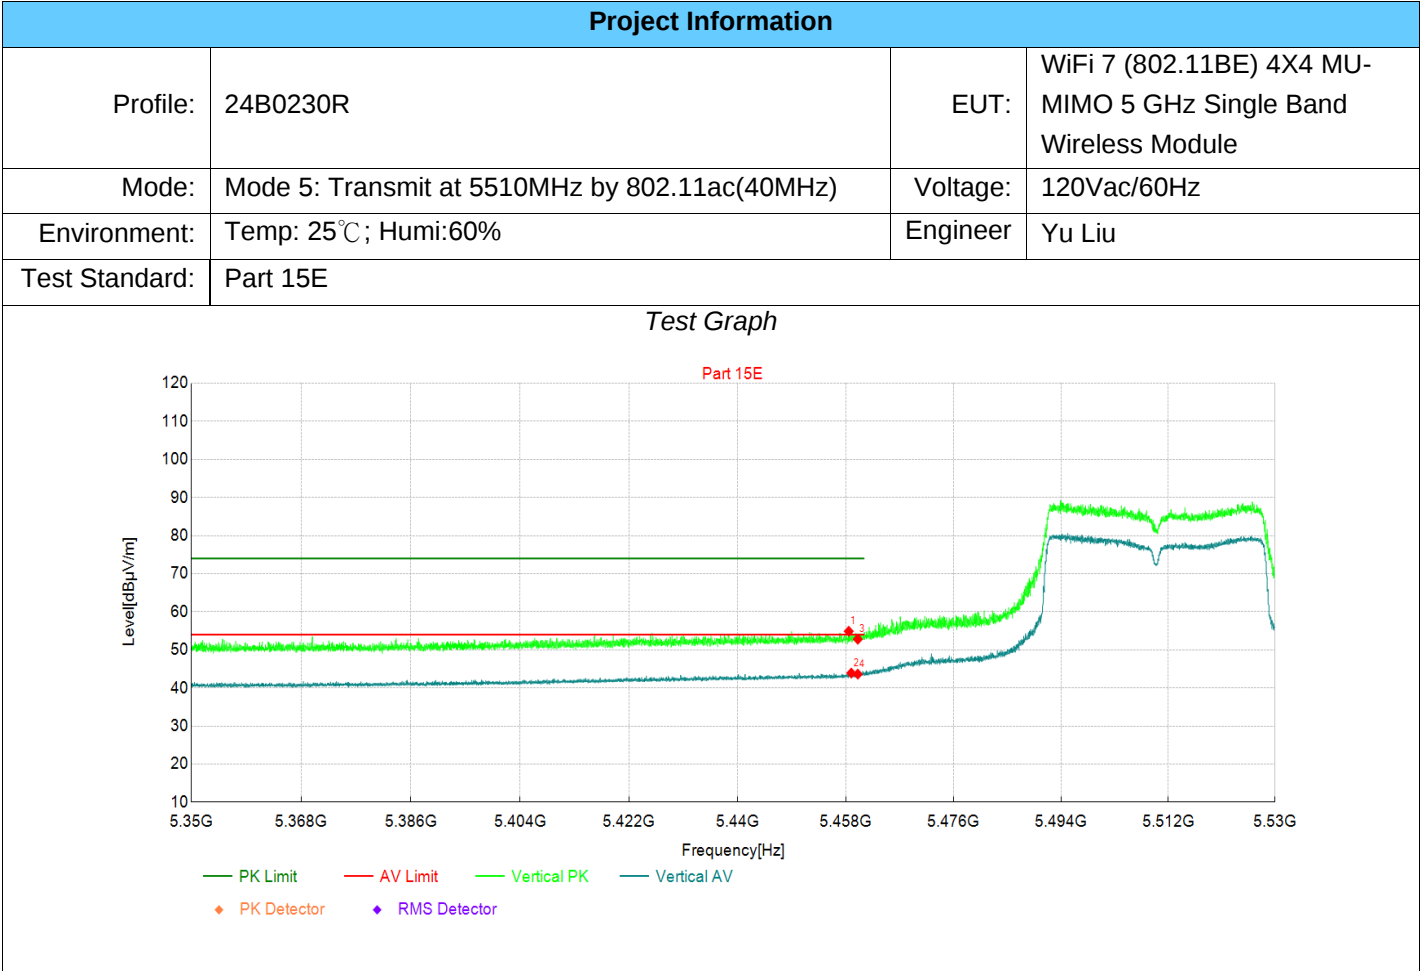

Suspected Data List									
NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5458	38.56	54.88	16.32	74.00	19.12	PK	Vertic	PASS
2	5459	27.57	43.90	16.33	54.00	10.10	AV	Vertic	PASS
3	5460	36.45	52.79	16.34	74.00	21.21	PK	Vertic	PASS
4	5460	27.29	43.63	16.34	54.00	10.37	AV	Vertic	PASS


Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level

Test Report

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 6: Transmit at 5210MHz by 802.11ac(80MHz)	Voltage:	120Vac/60Hz
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	Part 15E		

Test Graph

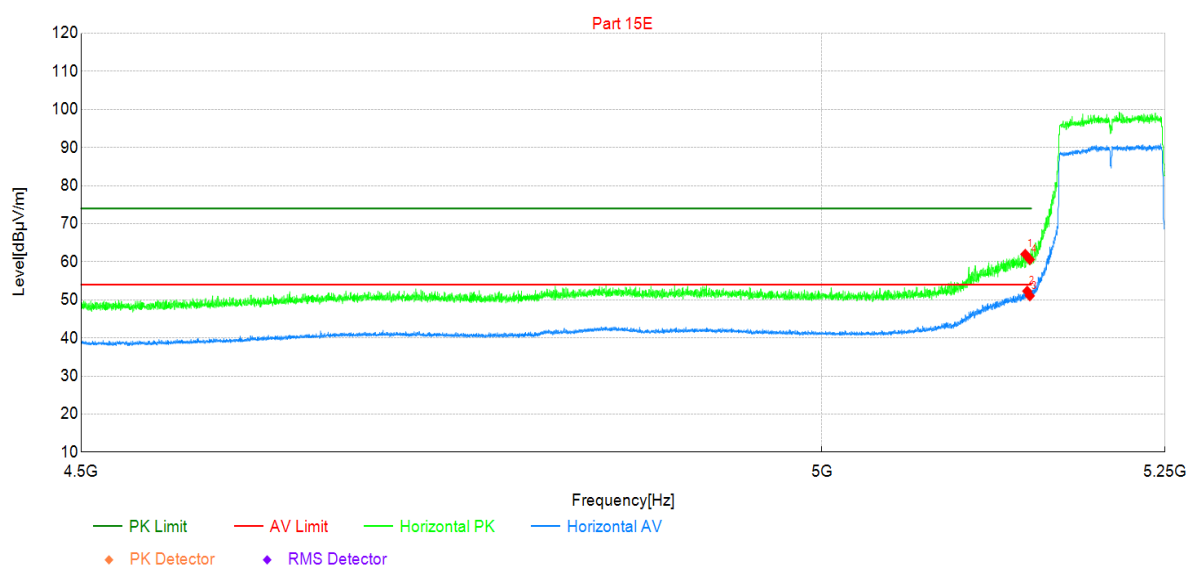


Suspected Data List

NO	Frequency [MHz]	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Det	Pol	Verdict
1	5147	46.90	61.99	15.09	74.00	12.01	PK	Horizo	PASS
2	5148	37.20	52.30	15.10	54.00	1.70	AV	Horizo	PASS
3	5150	35.94	51.05	15.11	54.00	2.95	AV	Horizo	PASS
4	5150	45.47	60.58	15.11	74.00	13.42	PK	Horizo	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Test Report

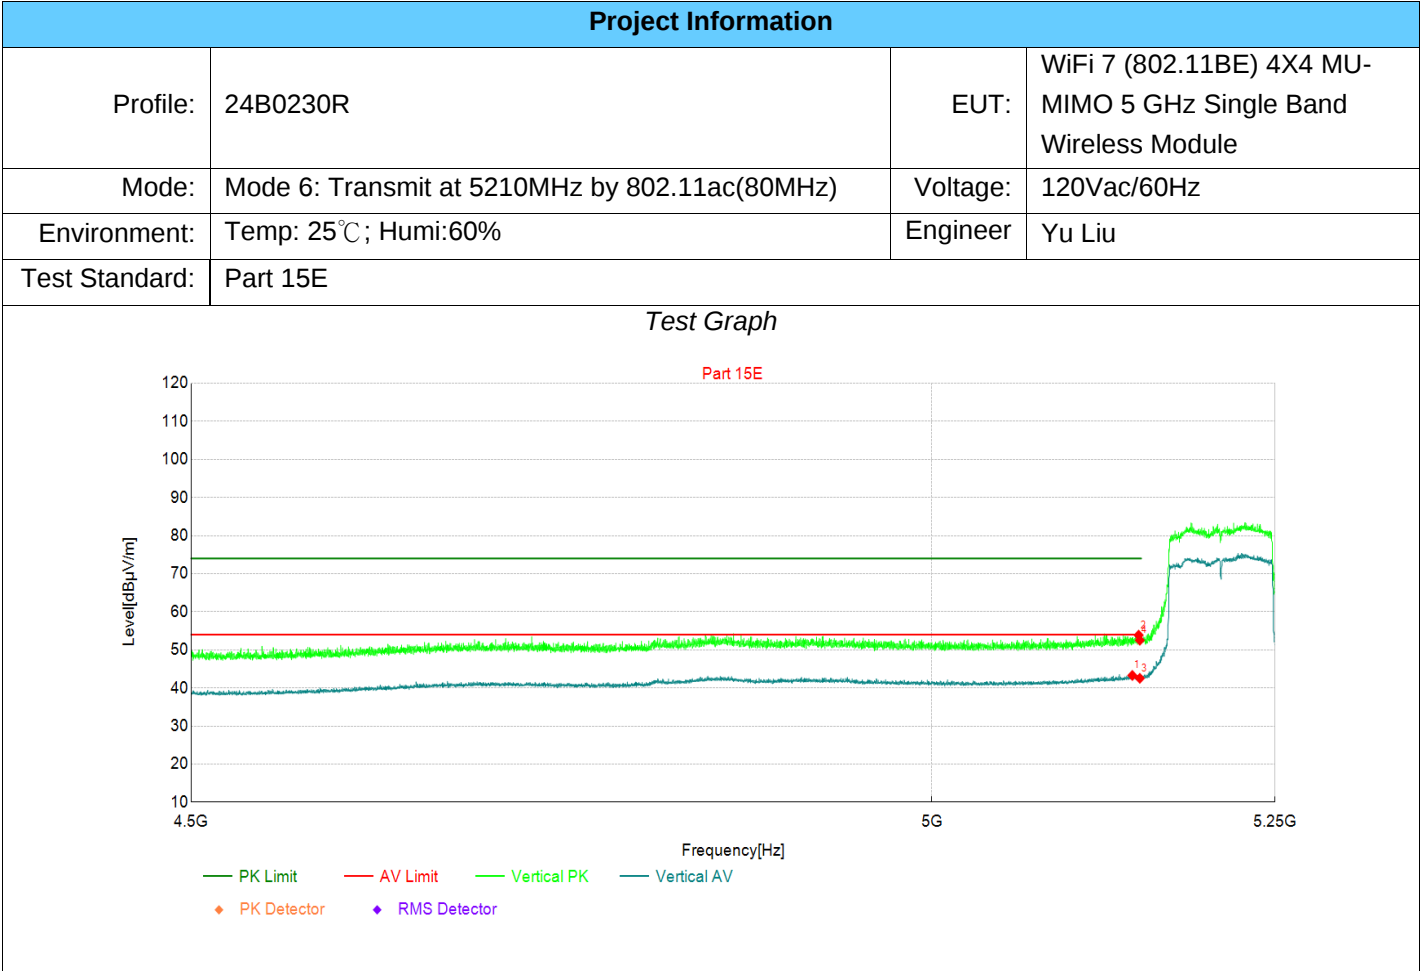

Suspected Data List									
NO	Frequency [MHz]	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Det	Pol	Verdict
1	5145	28.21	43.29	15.08	54.00	10.71	AV	Vertic	PASS
2	5149	38.76	53.86	15.10	74.00	20.14	PK	Vertic	PASS
3	5150	27.42	42.53	15.11	54.00	11.47	AV	Vertic	PASS
4	5150	37.42	52.53	15.11	74.00	21.47	PK	Vertic	PASS


Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level

Test Report

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 6: Transmit at 5290MHz by 802.11ac(80MHz)	Voltage:	120Vac/60Hz
Environment:	Temp: 25°C; Humi:60%	Engineer	Yu Liu
Test Standard:	Part 15E		

Test Graph

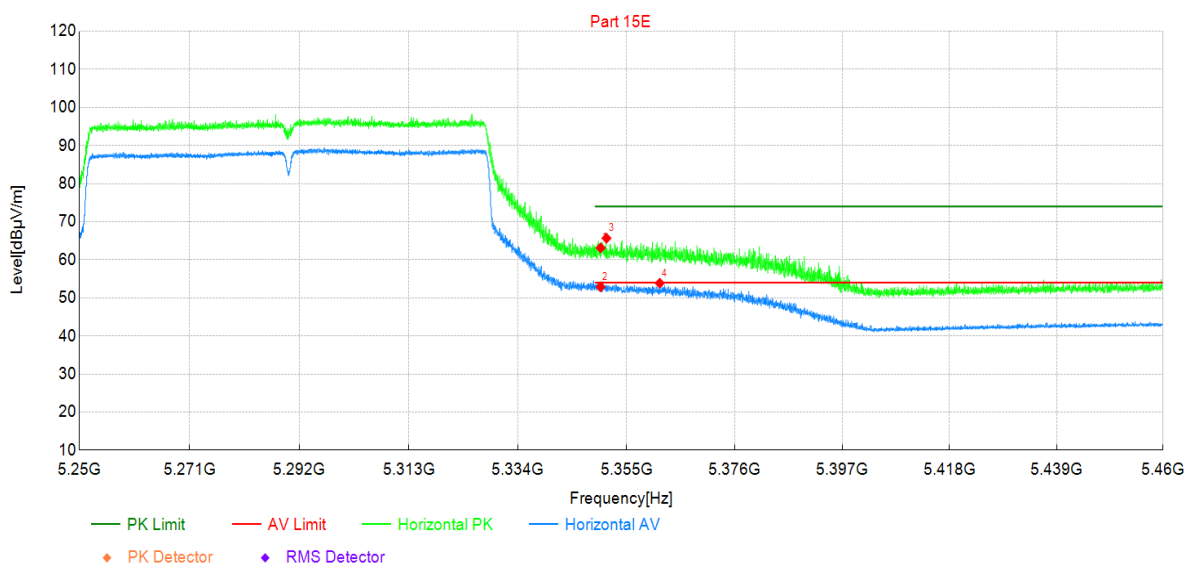


Suspected Data List

NO	Frequency [MHz]	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Det	Pol	Verdict
1	5350	47.42	63.13	15.71	74.00	10.87	PK	Horizo	PASS
2	5350	37.17	52.88	15.71	54.00	1.12	AV	Horizo	PASS
3	5351	49.96	65.67	15.71	74.00	8.33	PK	Horizo	PASS
4	5361	38.17	53.86	15.69	54.00	0.14	AV	Horizo	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level


Test Report

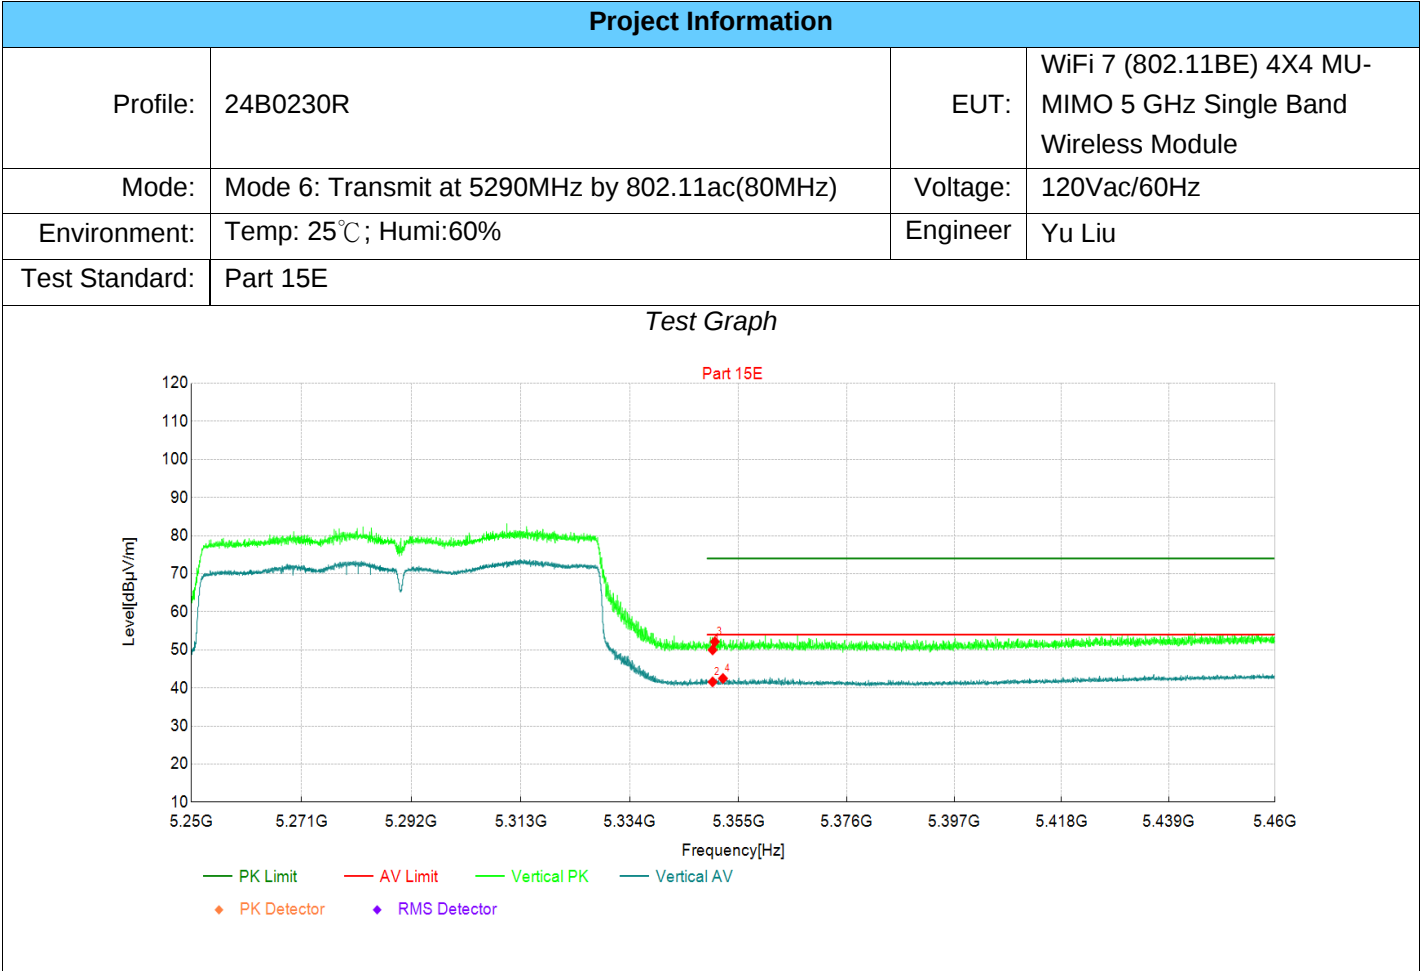

Suspected Data List									
NO	Frequency [MHz]	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Det	Pol	Verdict
1	5350	34.28	49.99	15.71	74.00	24.01	PK	Vertic	PASS
2	5350	25.88	41.59	15.71	54.00	12.41	AV	Vertic	PASS
3	5350	36.43	52.14	15.71	74.00	21.86	PK	Vertic	PASS
4	5352	26.78	42.49	15.71	54.00	11.51	AV	Vertic	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level


Test Report

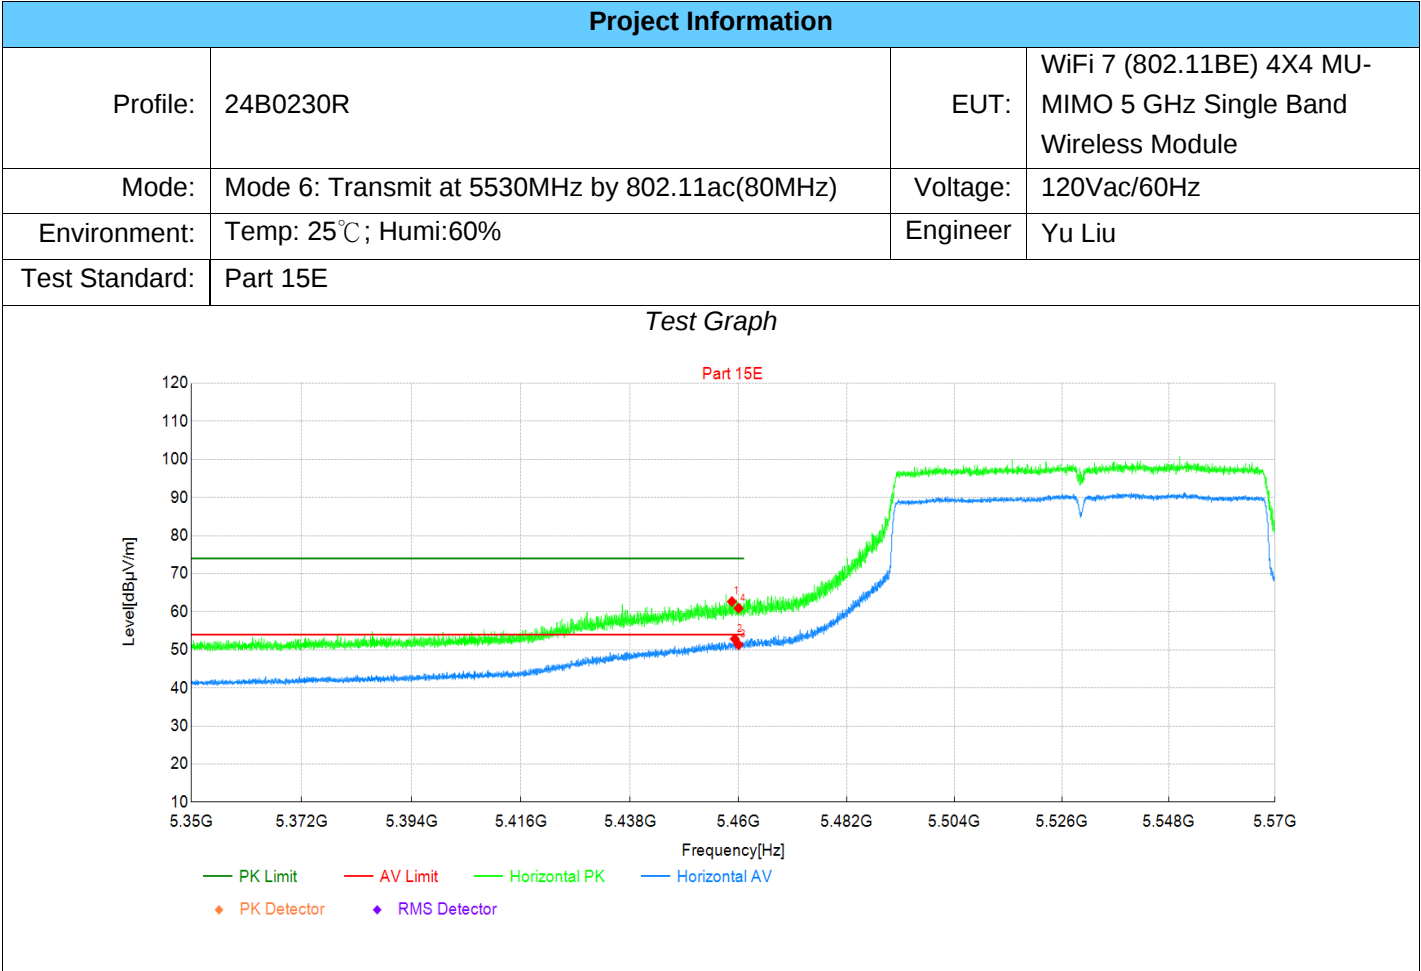

Suspected Data List									
NO	Frequency [MHz]	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Det	Pol	Verdict
1	5459	46.37	62.69	16.32	74.00	11.31	PK	Horizo	PASS
2	5459	36.52	52.85	16.33	54.00	1.15	AV	Horizo	PASS
3	5460	35.01	51.35	16.34	54.00	2.65	AV	Horizo	PASS
4	5460	44.58	60.92	16.34	74.00	13.08	PK	Horizo	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level

Test Report

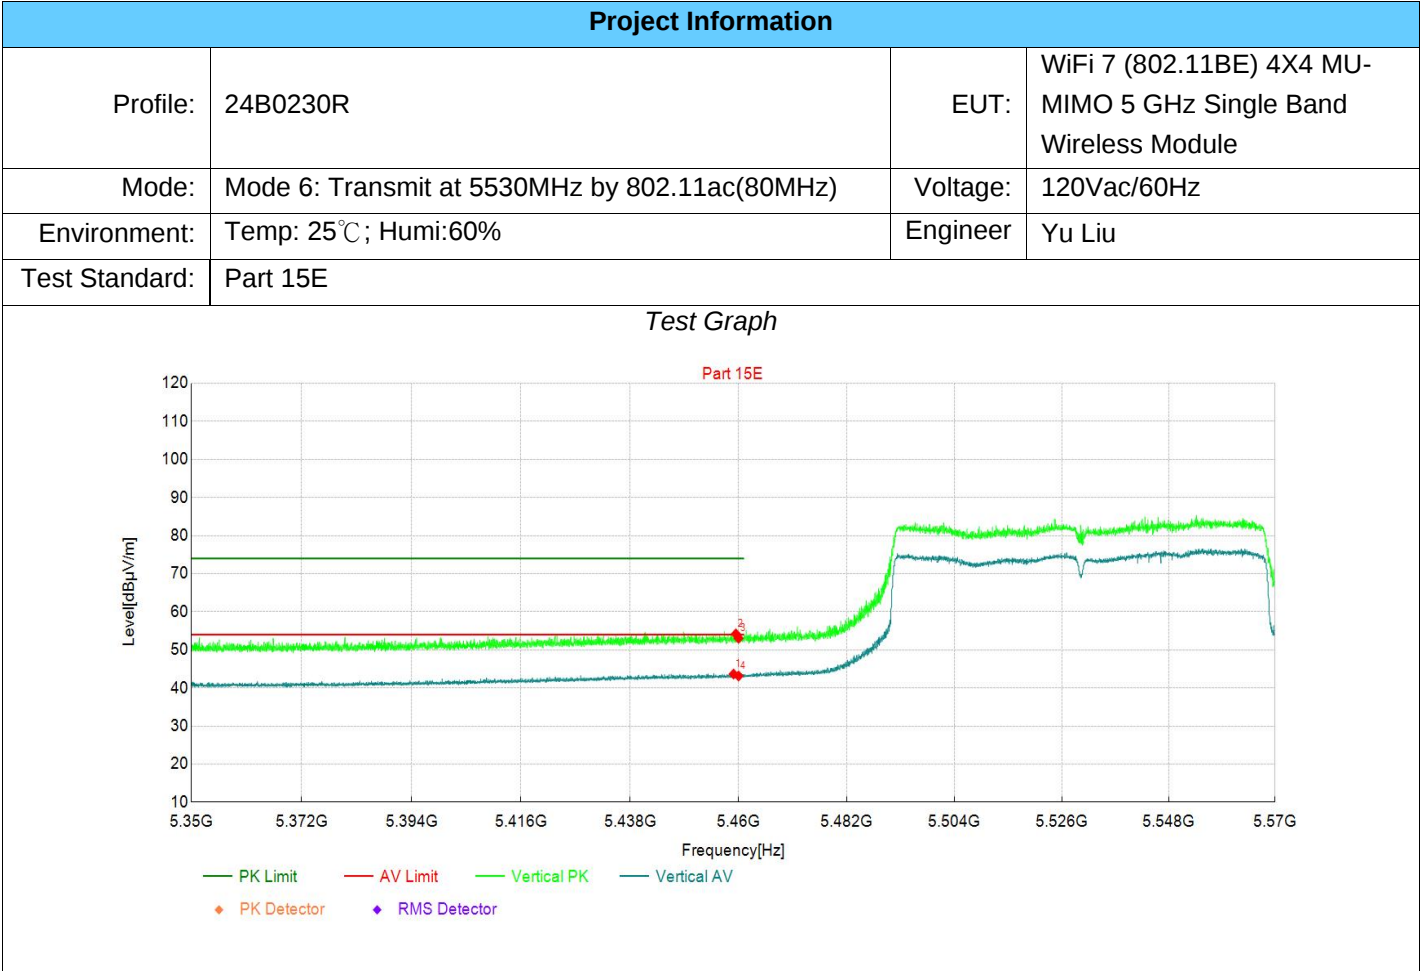

Suspected Data List									
NO	Frequency [MHz]	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Det	Pol	Verdict
1	5459	27.31	43.64	16.33	54.00	10.36	AV	Vertic	PASS
2	5459	37.86	54.20	16.34	74.00	19.80	PK	Vertic	PASS
3	5460	36.72	53.06	16.34	74.00	20.94	PK	Vertic	PASS
4	5460	26.81	43.15	16.34	54.00	10.85	AV	Vertic	PASS


Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level

Test Report

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 7: Transmit at 5250MHz by 802.11ac(160MHz)	Voltage:	120Vac/60Hz
Environment:	Temp: 25°C; Humi:60%	Engineer	Yu Liu
Test Standard:	Part 15E		

Test Graph

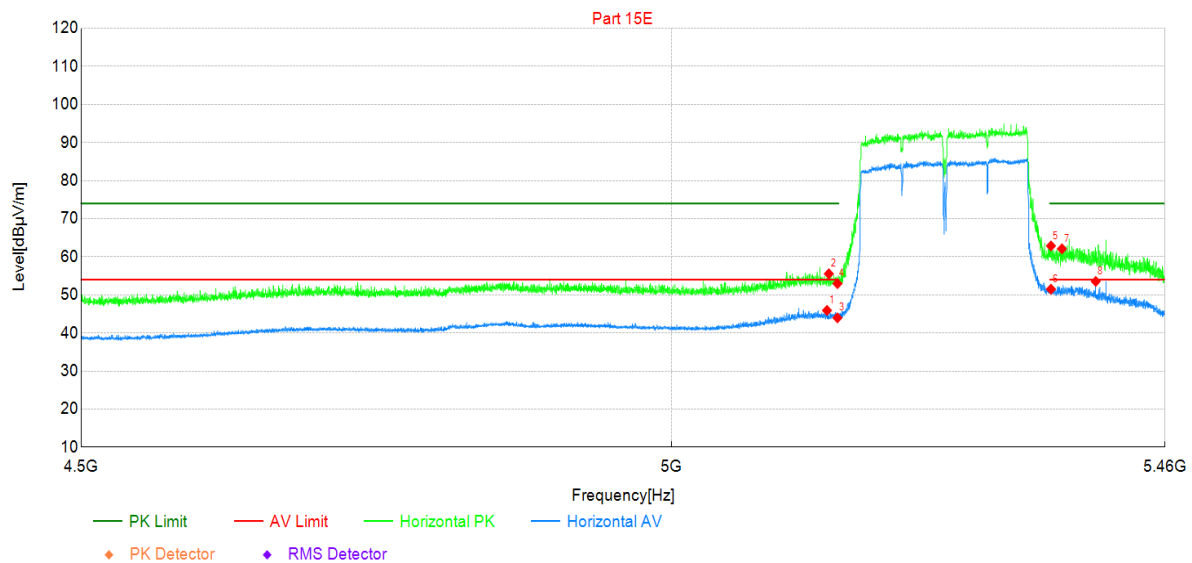

Suspected Data List

NO	Frequency [MHz]	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Det	Pol	Verdict
1	5140	30.86	45.91	15.05	54.00	8.09	AV	Horizo	PASS
2	5142	40.48	55.54	15.06	74.00	18.46	PK	Horizo	PASS
3	5150	28.85	43.96	15.11	54.00	10.04	AV	Horizo	PASS
4	5150	37.85	52.96	15.11	74.00	21.04	PK	Horizo	PASS
5	5350	47.15	62.86	15.71	74.00	11.14	PK	Horizo	PASS
6	5350	35.78	51.49	15.71	54.00	2.51	AV	Horizo	PASS
7	5361	46.40	62.10	15.70	74.00	11.90	PK	Horizo	PASS
8	5393	37.88	53.54	15.66	54.00	0.46	AV	Horizo	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

Test Report

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 7: Transmit at 5250MHz by 802.11ac(160MHz)	Voltage:	120Vac/60Hz
Environment:	Temp: 25°C; Humi:60%	Engineer	Yu Liu
Test Standard:	Part 15E		

Test Graph

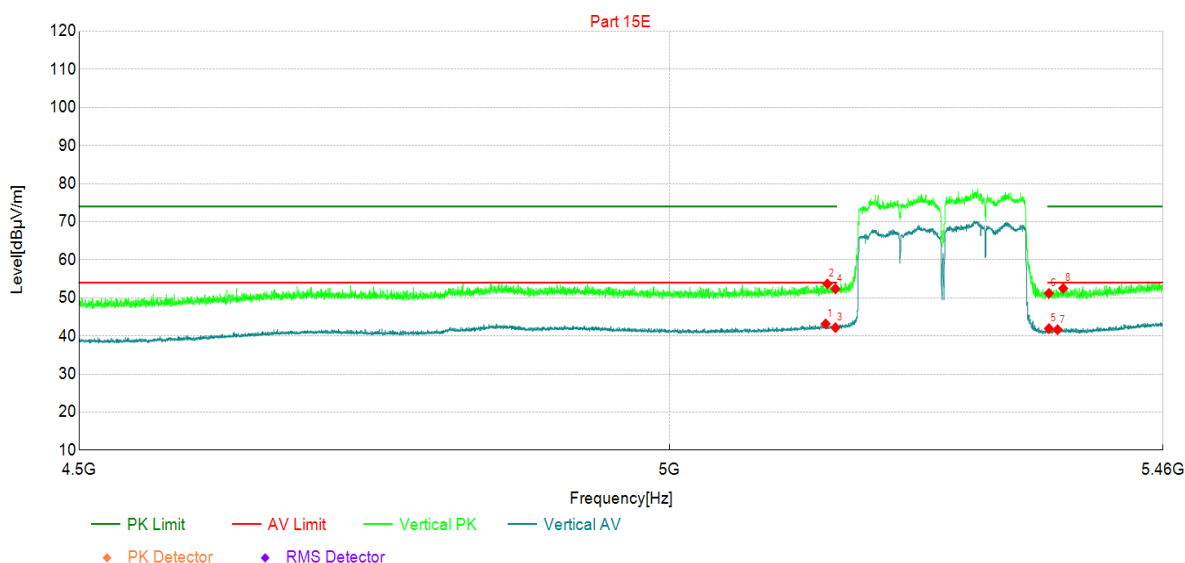


Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5141	28.11	43.17	15.06	54.00	10.83	AV	Vertic	PASS
2	5143	38.61	53.68	15.07	74.00	20.32	PK	Vertic	PASS
3	5150	27.07	42.18	15.11	54.00	11.82	AV	Vertic	PASS
4	5150	37.27	52.38	15.11	74.00	21.62	PK	Vertic	PASS
5	5350	26.22	41.93	15.71	54.00	12.07	AV	Vertic	PASS
6	5350	35.46	51.17	15.71	74.00	22.83	PK	Vertic	PASS
7	5358	25.95	41.65	15.70	54.00	12.35	AV	Vertic	PASS
8	5364	36.80	52.49	15.69	74.00	21.51	PK	Vertic	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Test Report

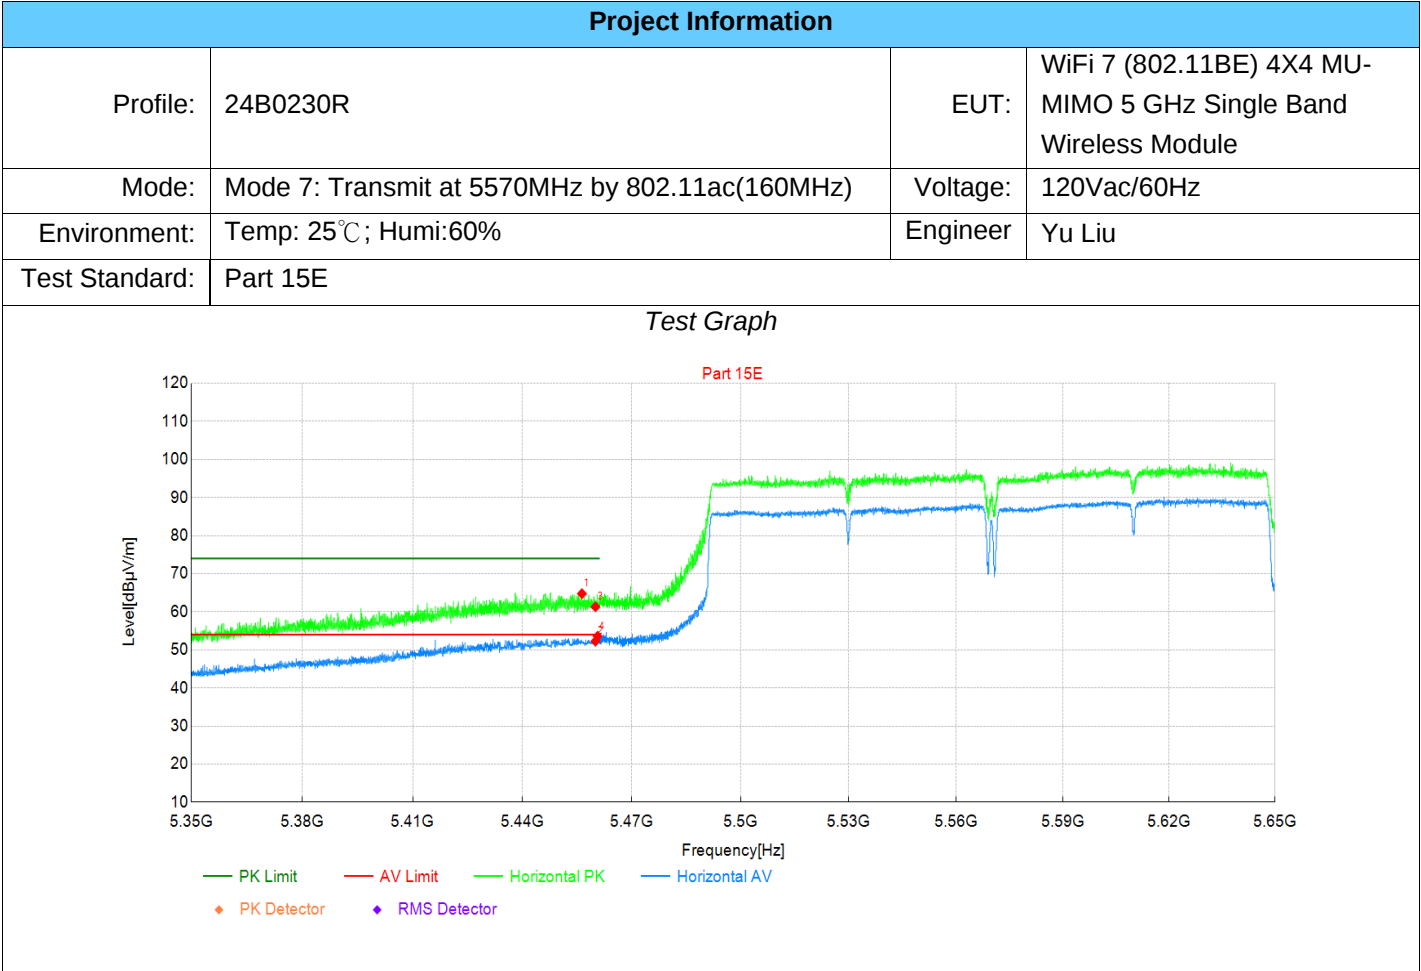

Suspected Data List									
NO	Frequency [MHz]	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Det	Pol	Verdict
1	5456	48.46	64.76	16.30	74.00	9.24	PK	Horizo	PASS
2	5460	35.93	52.27	16.34	54.00	1.73	AV	Horizo	PASS
3	5460	44.97	61.31	16.34	74.00	12.69	PK	Horizo	PASS
4	5461	37.25	53.60	16.35	54.00	0.40	AV	Horizo	PASS


Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level

Test Report

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 7: Transmit at 5570MHz by 802.11ac(160MHz)	Voltage:	120Vac/60Hz
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	Part 15E		

Test Graph

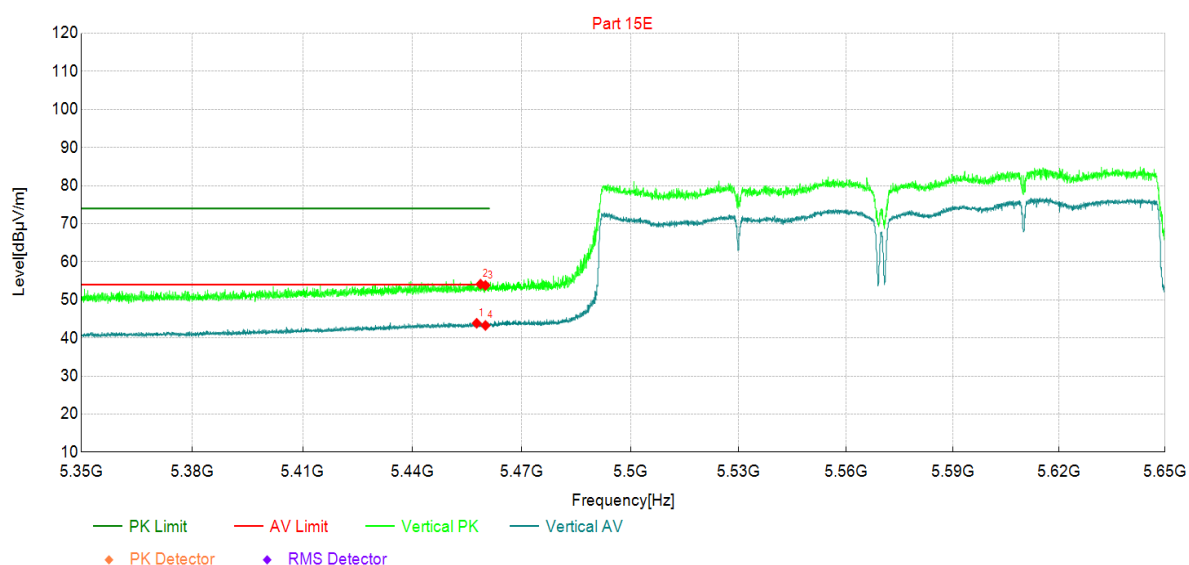


Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5458	27.54	43.85	16.31	54.00	10.15	AV	Vertic	PASS
2	5459	37.81	54.13	16.32	74.00	19.87	PK	Vertic	PASS
3	5460	37.45	53.79	16.34	74.00	20.21	PK	Vertic	PASS
4	5460	26.94	43.28	16.34	54.00	10.72	AV	Vertic	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level


Test Report

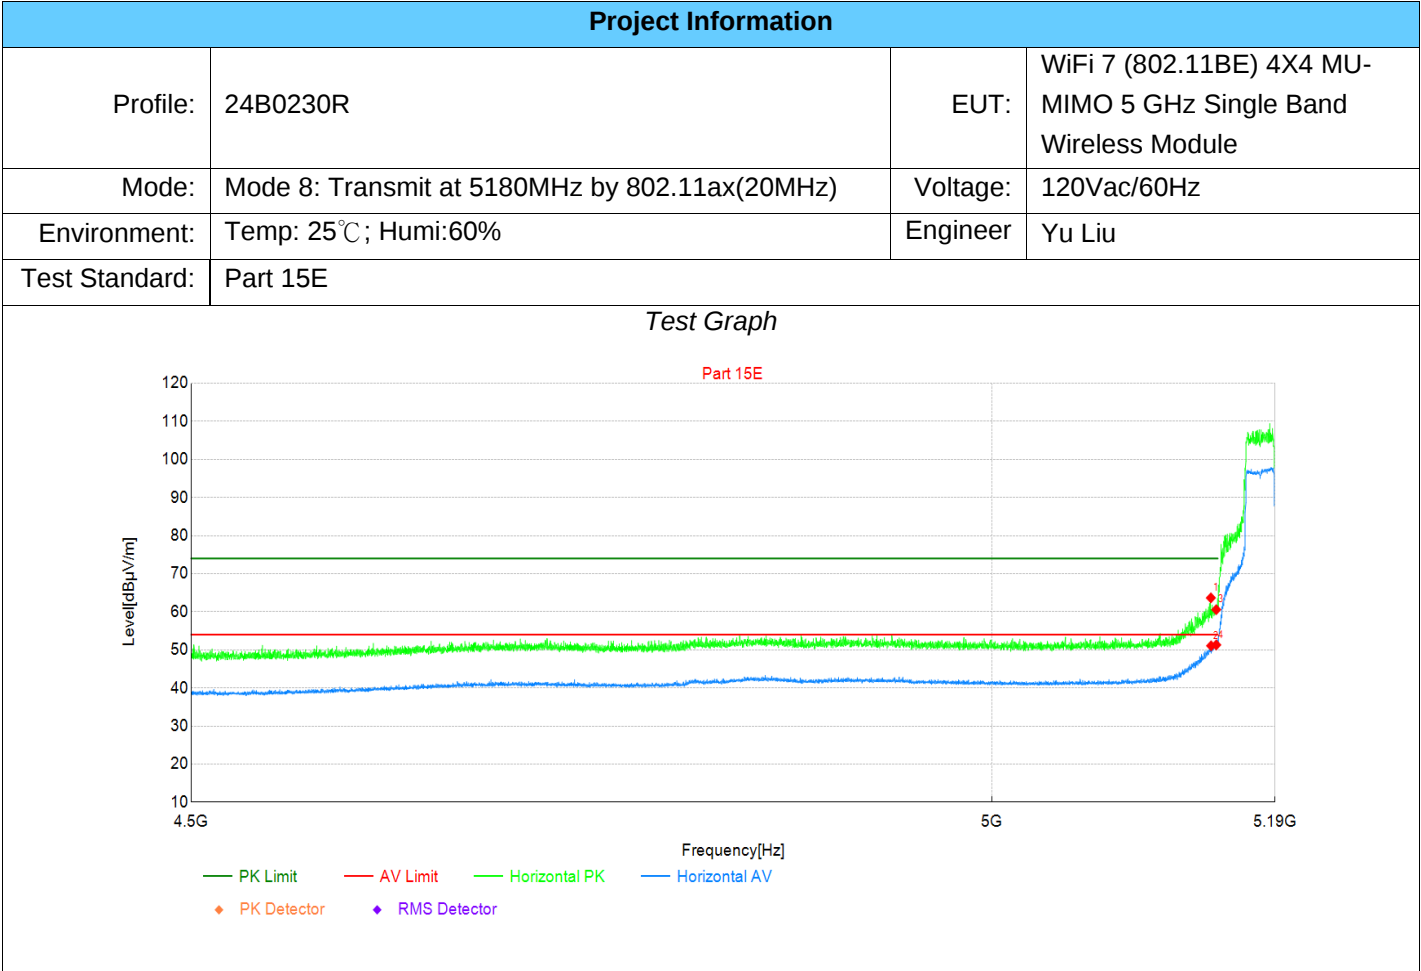

Suspected Data List									
NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5146	48.57	63.66	15.09	74.00	10.34	PK	Horizo	PASS
2	5147	35.97	51.06	15.09	54.00	2.94	AV	Horizo	PASS
3	5150	45.45	60.56	15.11	74.00	13.44	PK	Horizo	PASS
4	5150	36.19	51.30	15.11	54.00	2.70	AV	Horizo	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level

Test Report

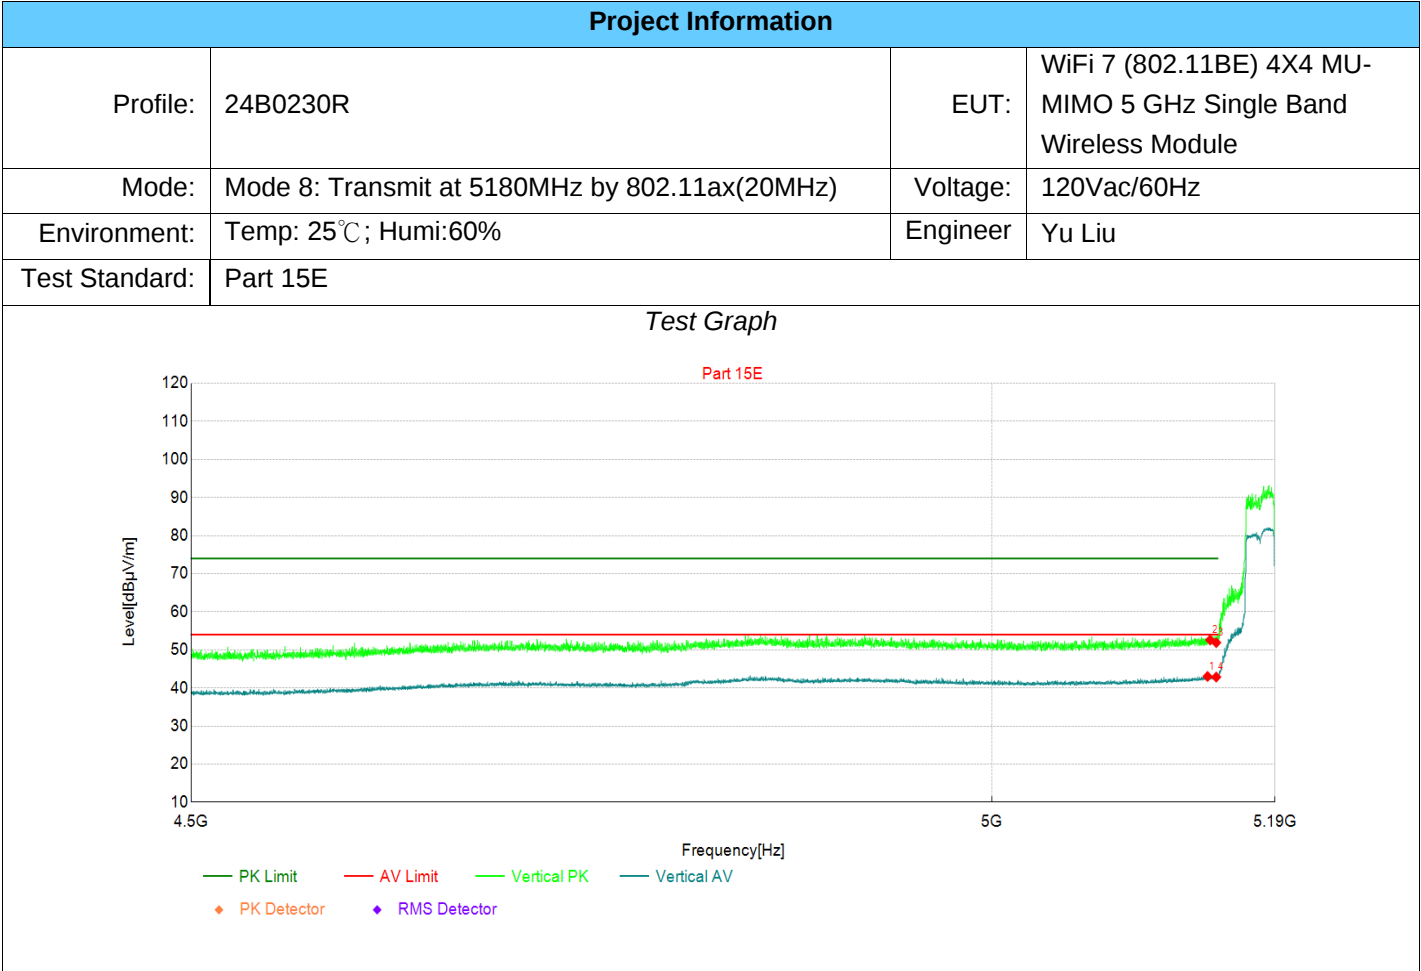

Suspected Data List									
NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5144	27.95	43.03	15.08	54.00	10.97	AV	Vertic	PASS
2	5146	37.51	52.60	15.09	74.00	21.40	PK	Vertic	PASS
3	5150	36.79	51.90	15.11	74.00	22.10	PK	Vertic	PASS
4	5150	27.75	42.86	15.11	54.00	11.14	AV	Vertic	PASS


Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level

Test Report

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 8: Transmit at 5320MHz by 802.11ax(20MHz)	Voltage:	120Vac/60Hz
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	Part 15E		

Test Graph

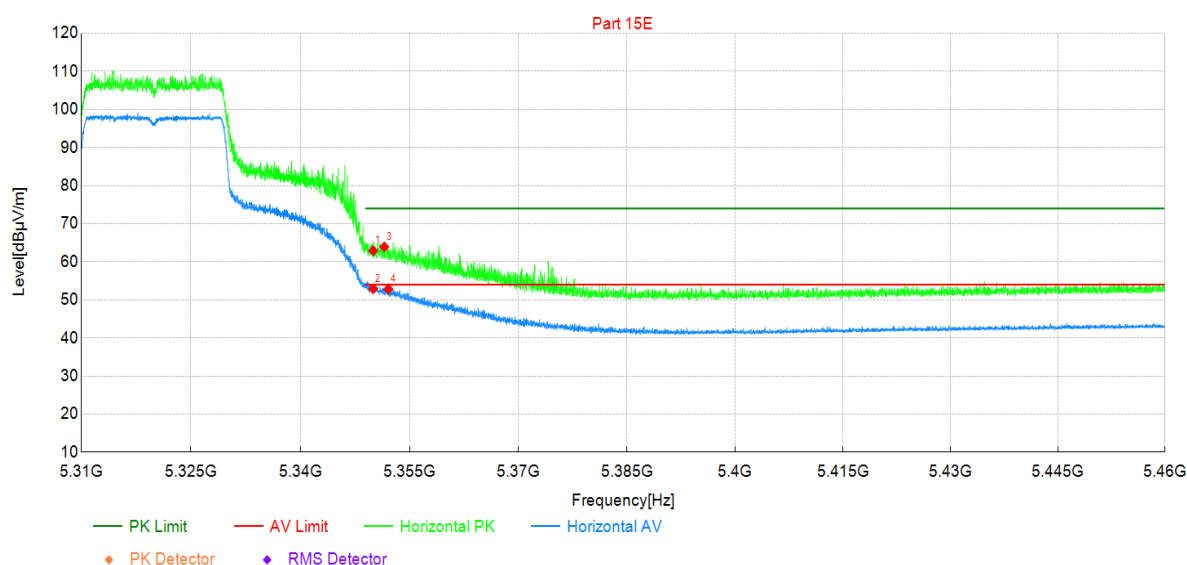


Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5350	47.20	62.91	15.71	74.00	11.09	PK	Horizo	PASS
2	5350	37.20	52.91	15.71	54.00	1.09	AV	Horizo	PASS
3	5352	48.21	63.92	15.71	74.00	10.08	PK	Horizo	PASS
4	5352	37.11	52.82	15.71	54.00	1.18	AV	Horizo	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level


Test Report

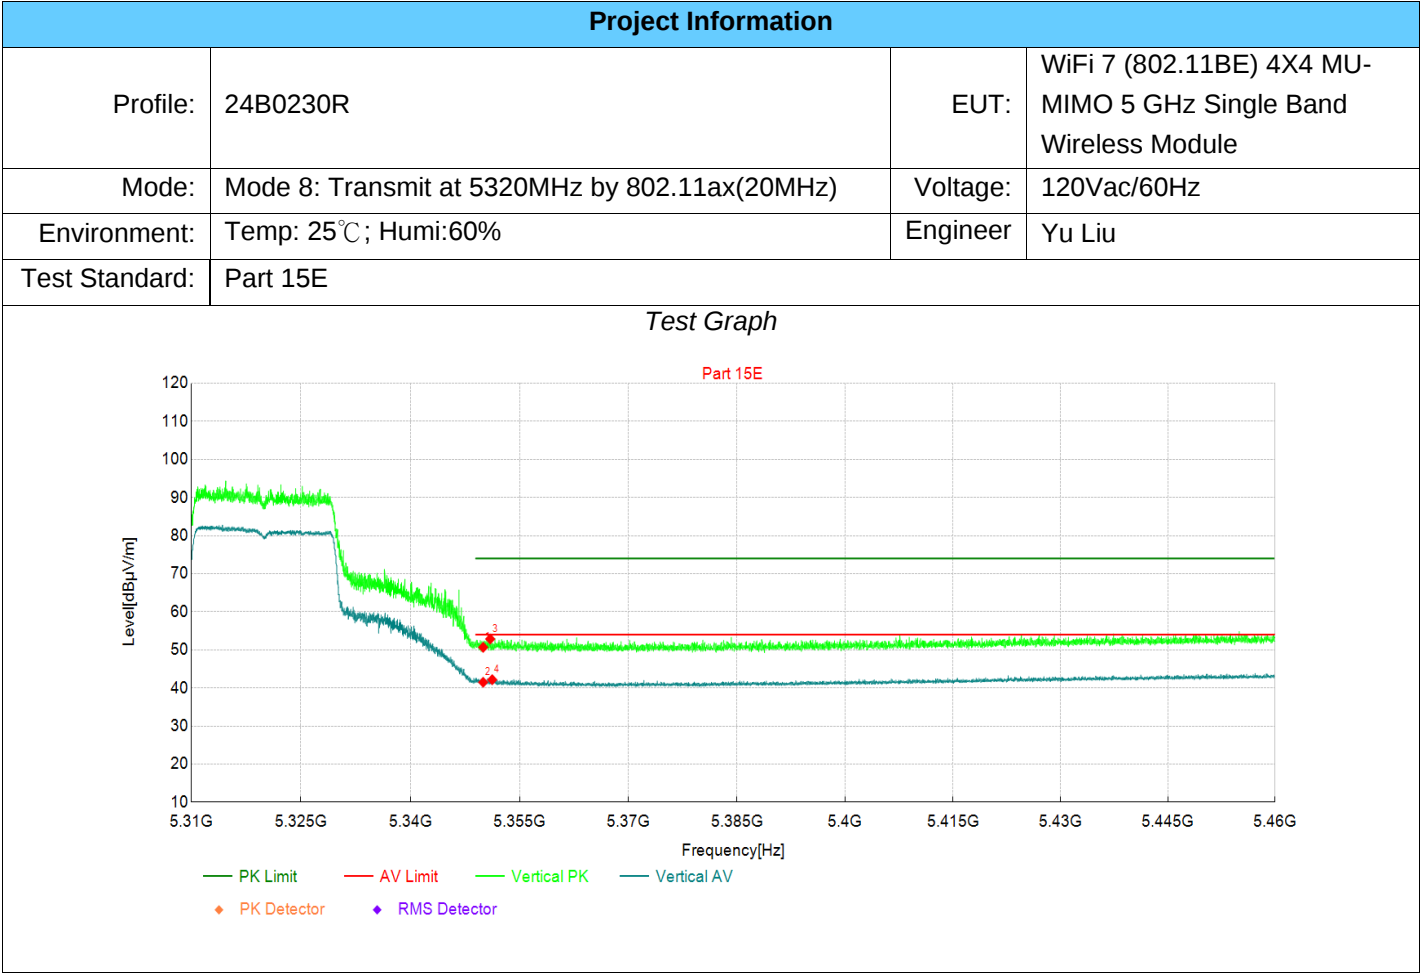

Suspected Data List									
NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5350	34.96	50.67	15.71	74.00	23.33	PK	Vertic	PASS
2	5350	25.78	41.49	15.71	54.00	12.51	AV	Vertic	PASS
3	5351	37.15	52.86	15.71	74.00	21.14	PK	Vertic	PASS
4	5351	26.46	42.17	15.71	54.00	11.83	AV	Vertic	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level


Test Report

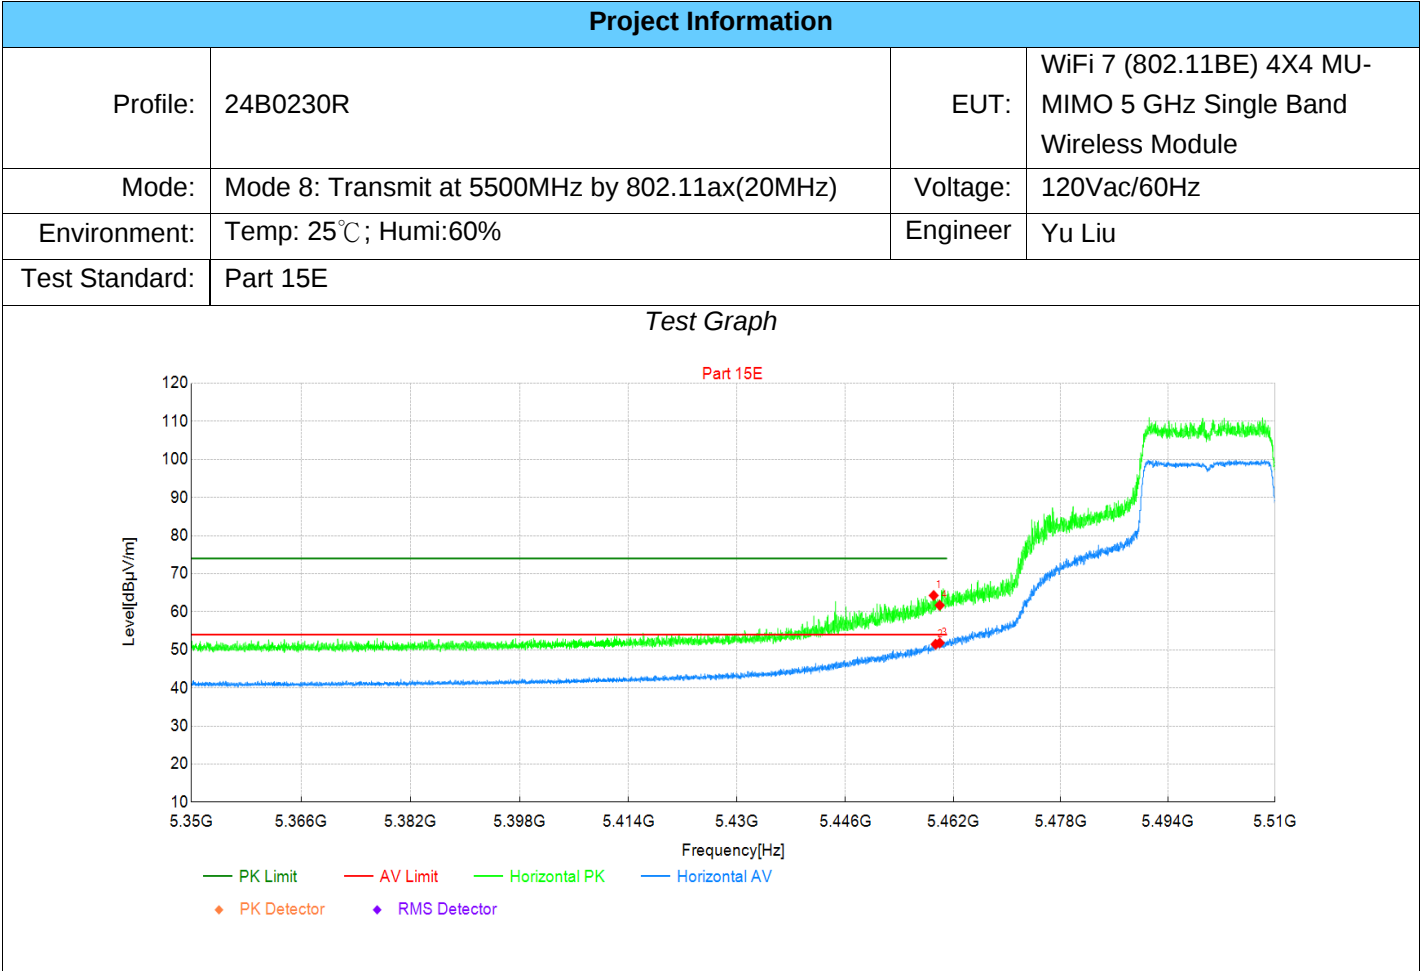

Suspected Data List									
NO	Frequency [MHz]	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Det	Pol	Verdict
1	5459	47.95	64.28	16.33	74.00	9.72	PK	Horizo	PASS
2	5459	35.13	51.47	16.34	54.00	2.53	AV	Horizo	PASS
3	5460	35.48	51.82	16.34	54.00	2.18	AV	Horizo	PASS
4	5460	45.37	61.71	16.34	74.00	12.29	PK	Horizo	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level


Test Report

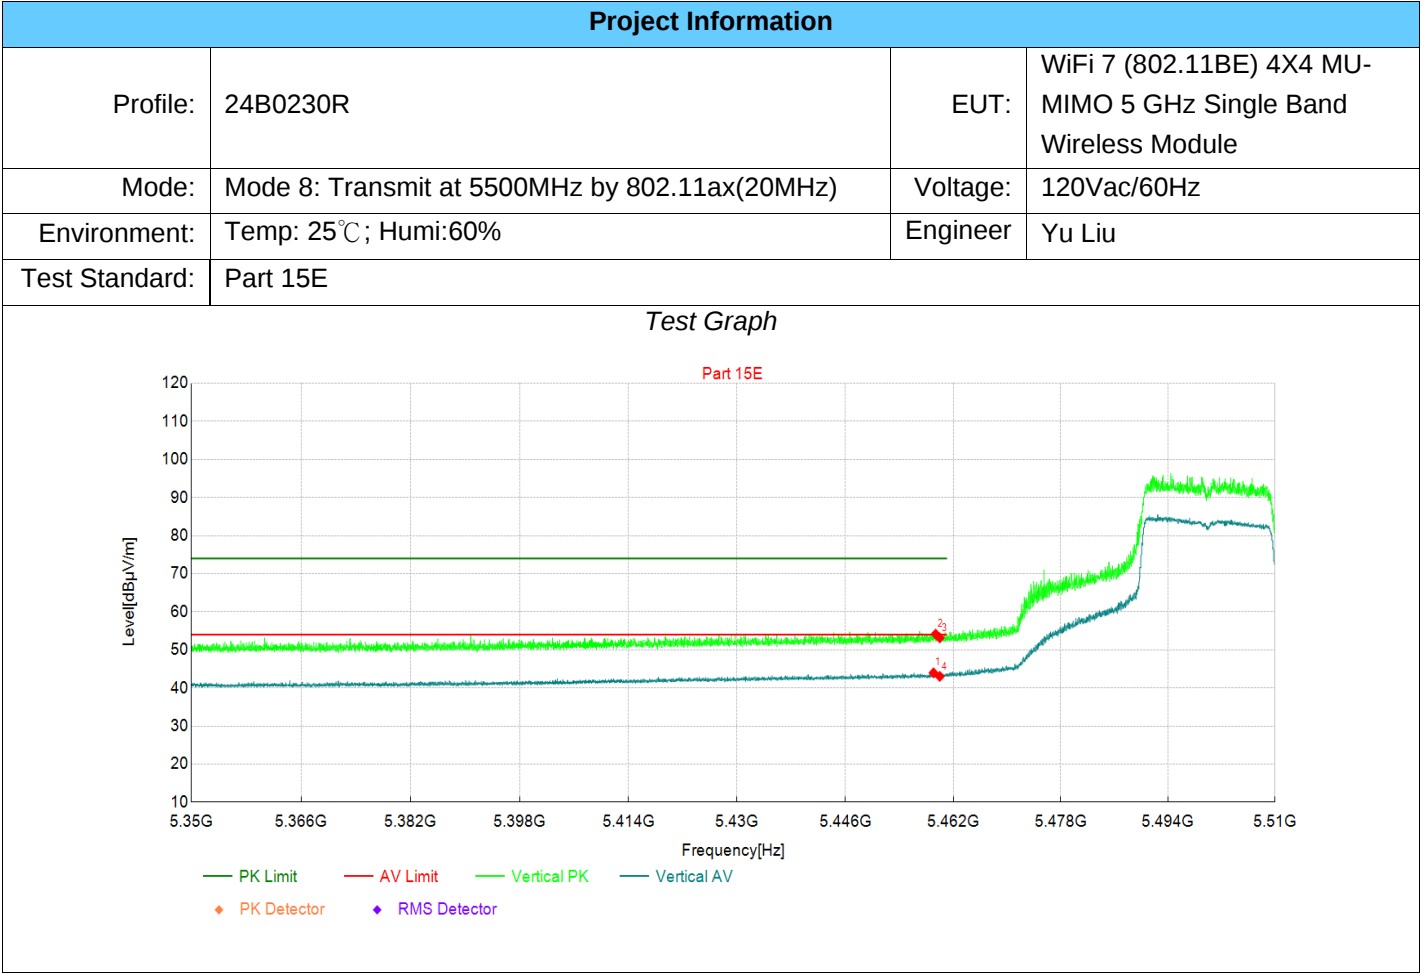

Suspected Data List									
NO	Frequency [MHz]	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Det	Pol	Verdict
1	5459	27.63	43.96	16.33	54.00	10.04	AV	Vertic	PASS
2	5459	37.79	54.13	16.34	74.00	19.87	PK	Vertic	PASS
3	5460	36.82	53.16	16.34	74.00	20.84	PK	Vertic	PASS
4	5460	26.69	43.03	16.34	54.00	10.97	AV	Vertic	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level

Test Report

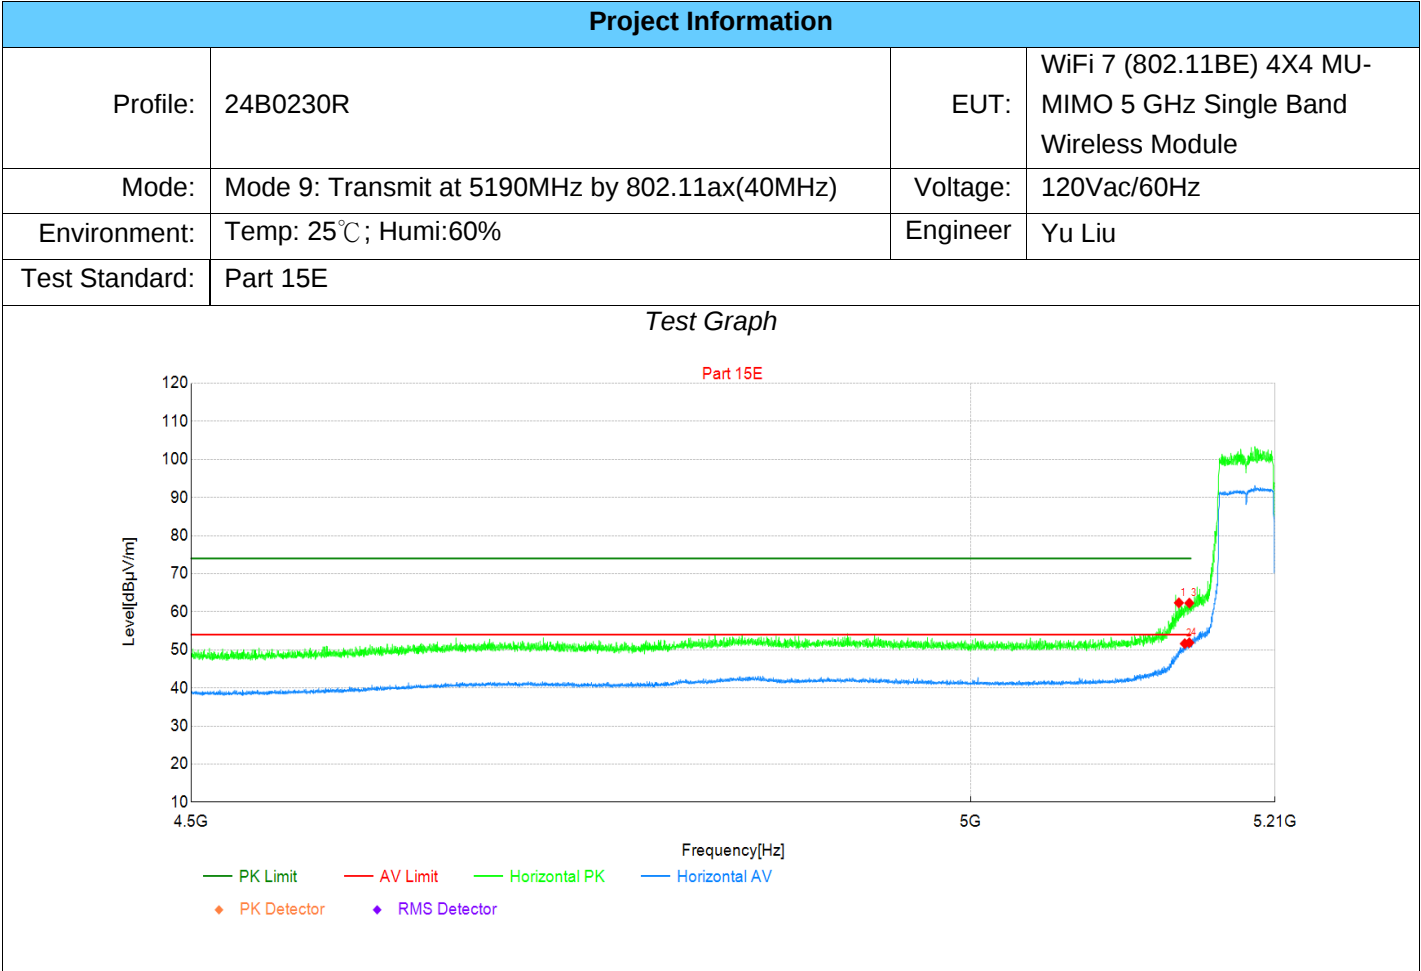

Suspected Data List									
NO	Frequency [MHz]	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Det	Pol	Verdict
1	5143	47.29	62.36	15.07	74.00	11.64	PK	Horizo	PASS
2	5147	36.55	51.64	15.09	54.00	2.36	AV	Horizo	PASS
3	5150	47.18	62.29	15.11	74.00	11.71	PK	Horizo	PASS
4	5150	36.77	51.88	15.11	54.00	2.12	AV	Horizo	PASS


Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level

Test Report

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 9: Transmit at 5190MHz by 802.11ax(40MHz)	Voltage:	120Vac/60Hz
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	Part 15E		

Test Graph

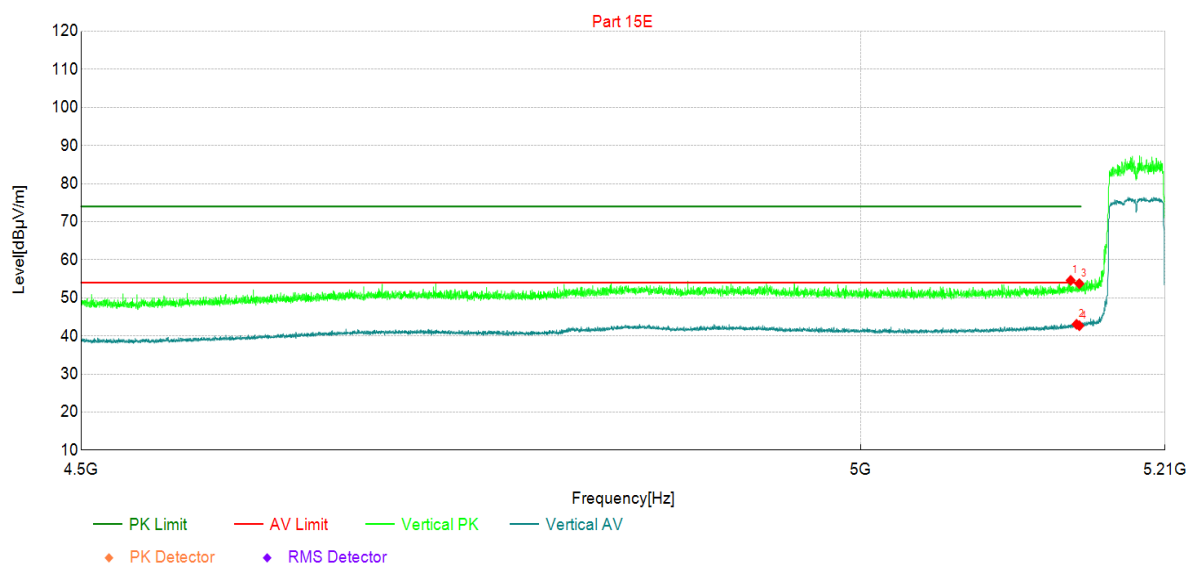


Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5144	39.52	54.60	15.08	74.00	19.40	PK	Vertic	PASS
2	5148	27.96	43.06	15.10	54.00	10.94	AV	Vertic	PASS
3	5150	38.61	53.72	15.11	74.00	20.28	PK	Vertic	PASS
4	5150	27.58	42.69	15.11	54.00	11.31	AV	Vertic	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level


Test Report

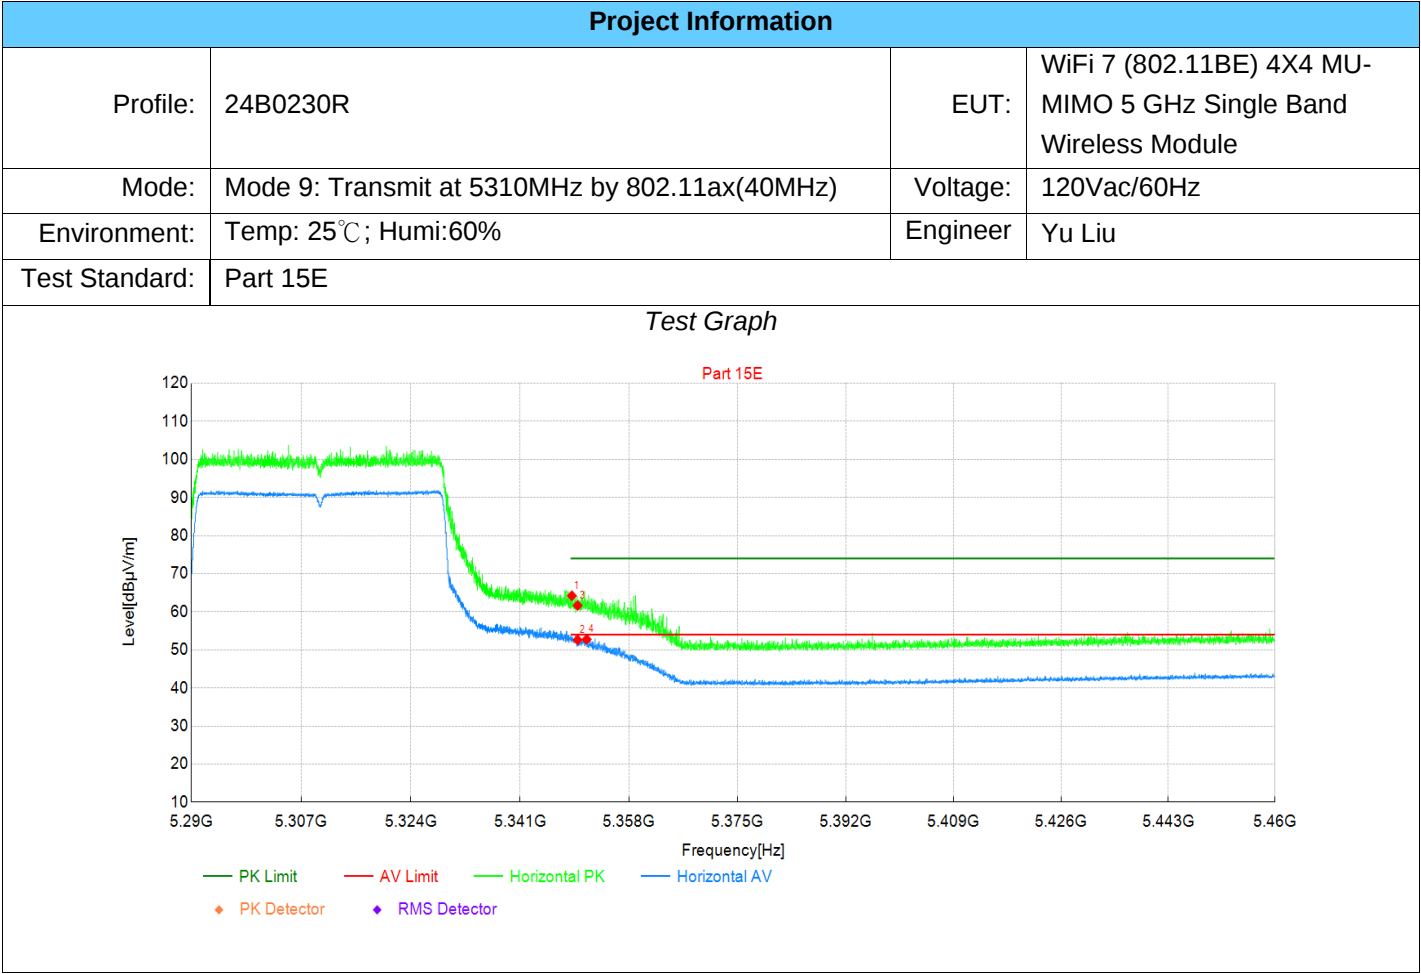

Suspected Data List									
NO	Frequency [MHz]	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Det	Pol	Verdict
1	5349	48.49	64.20	15.71	74.00	9.80	PK	Horizo	PASS
2	5350	36.90	52.61	15.71	54.00	1.39	AV	Horizo	PASS
3	5350	45.95	61.66	15.71	74.00	12.34	PK	Horizo	PASS
4	5351	37.04	52.75	15.71	54.00	1.25	AV	Horizo	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level


Test Report

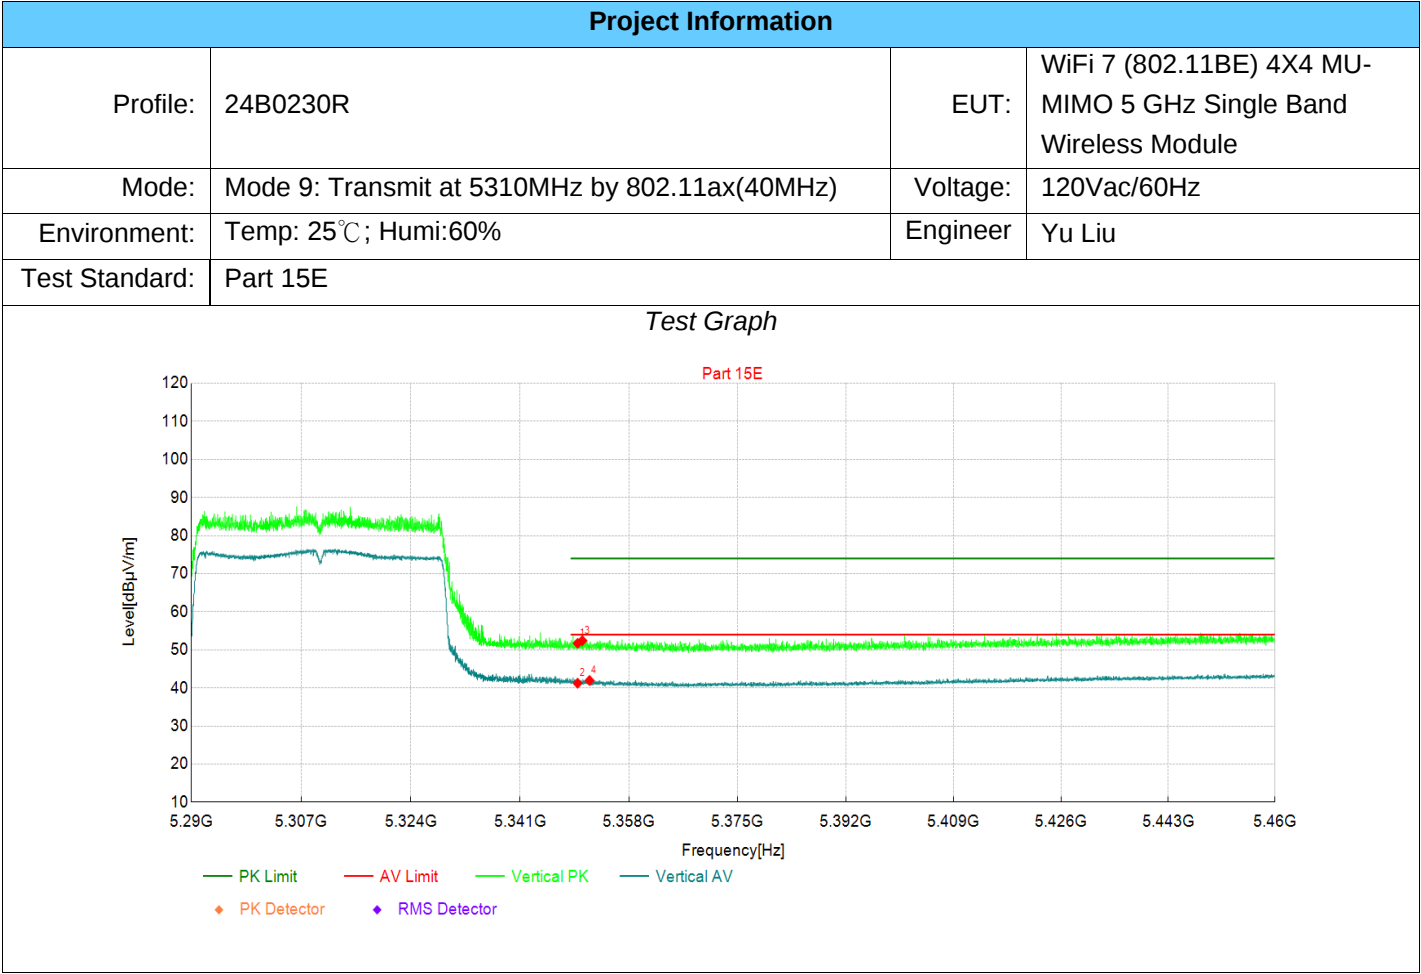

Suspected Data List									
NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5350	36.01	51.72	15.71	74.00	22.28	PK	Vertic	PASS
2	5350	25.54	41.25	15.71	54.00	12.75	AV	Vertic	PASS
3	5351	36.72	52.43	15.71	74.00	21.57	PK	Vertic	PASS
4	5352	26.25	41.96	15.71	54.00	12.04	AV	Vertic	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level


Test Report

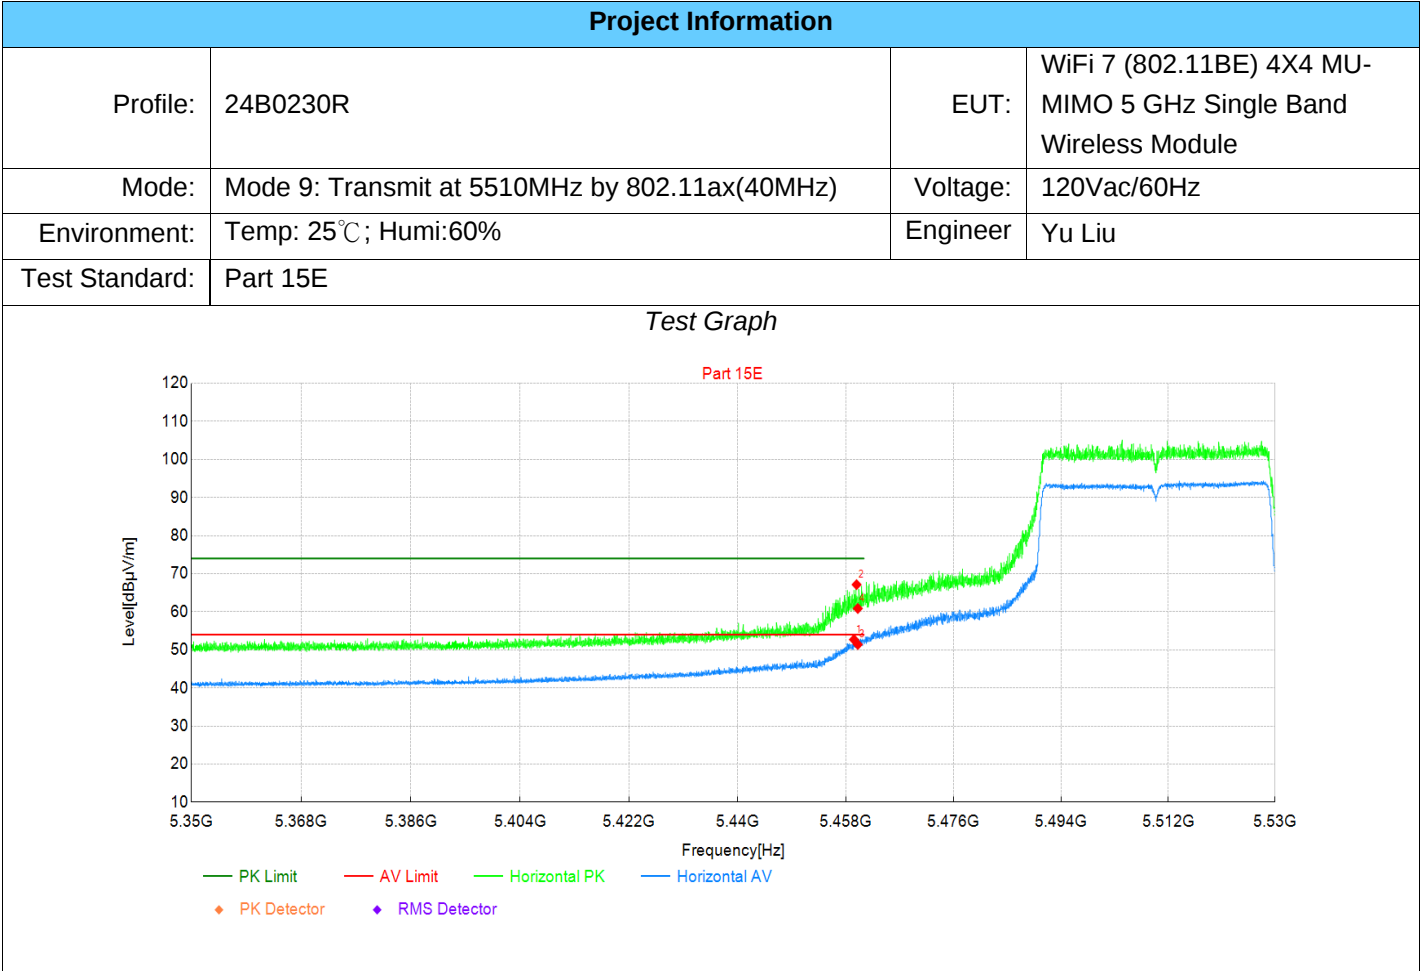

Suspected Data List									
NO	Frequency [MHz]	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Det	Pol	Verdict
1	5459	36.36	52.70	16.34	54.00	1.30	AV	Horizo	PASS
2	5460	50.80	67.14	16.34	74.00	6.86	PK	Horizo	PASS
3	5460	35.07	51.41	16.34	54.00	2.59	AV	Horizo	PASS
4	5460	44.53	60.87	16.34	74.00	13.13	PK	Horizo	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level

Test Report

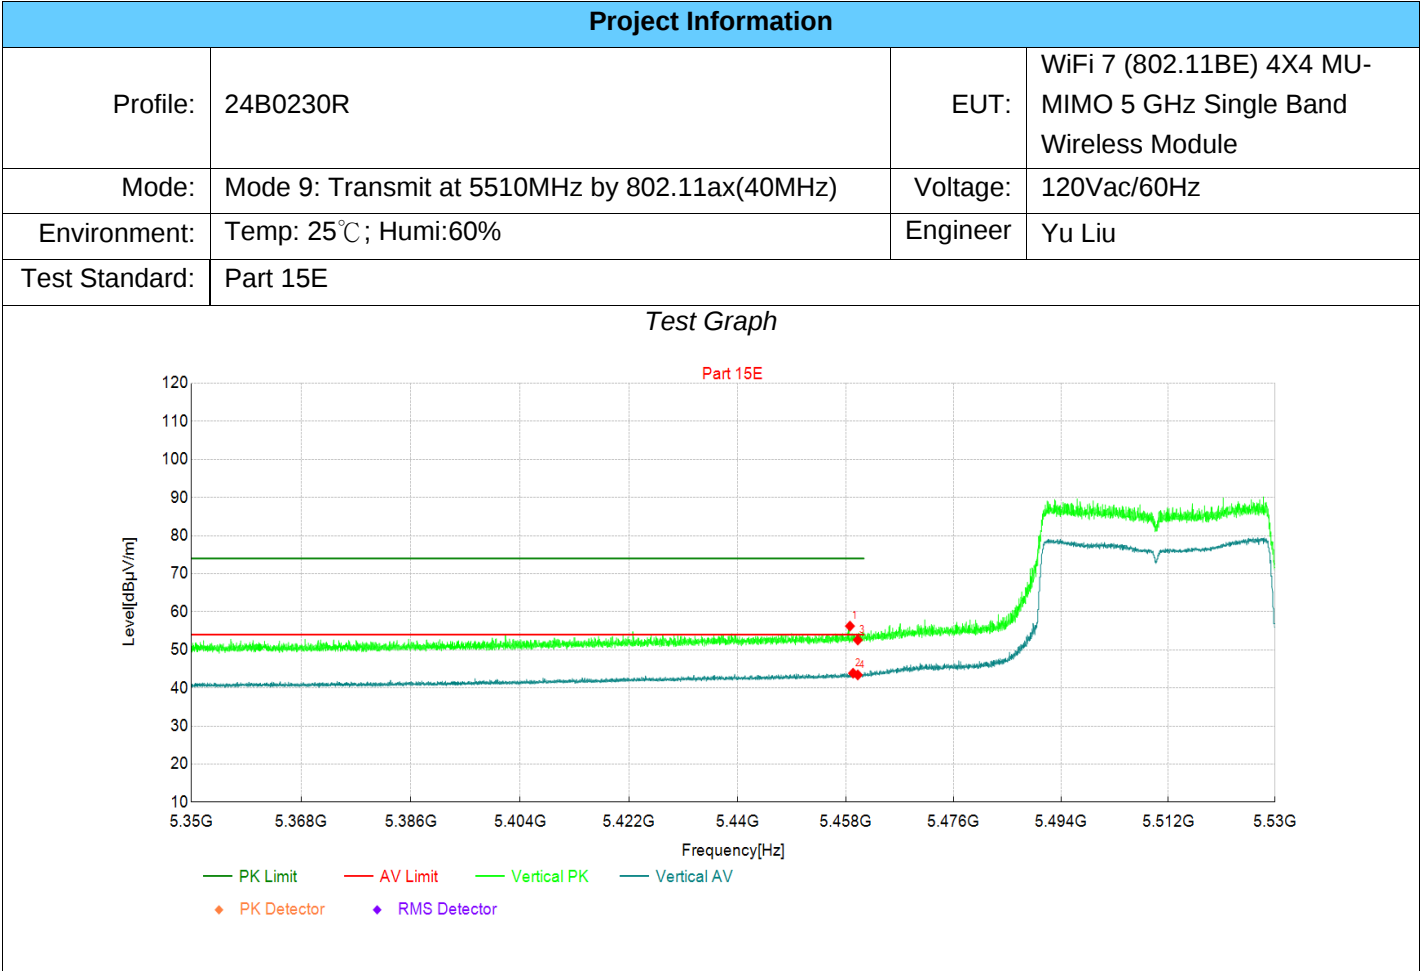

Suspected Data List									
NO	Frequency [MHz]	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Det	Pol	Verdict
1	5459	39.92	56.25	16.33	74.00	17.75	PK	Vertic	PASS
2	5459	27.54	43.87	16.33	54.00	10.13	AV	Vertic	PASS
3	5460	36.25	52.59	16.34	74.00	21.41	PK	Vertic	PASS
4	5460	27.07	43.41	16.34	54.00	10.59	AV	Vertic	PASS


Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level

Test Report

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 10: Transmit at 5210MHz by 802.11ax(80MHz)	Voltage:	120Vac/60Hz
Environment:	Temp: 25°C; Humi:60%	Engineer	Yu Liu
Test Standard:	Part 15E		

Test Graph

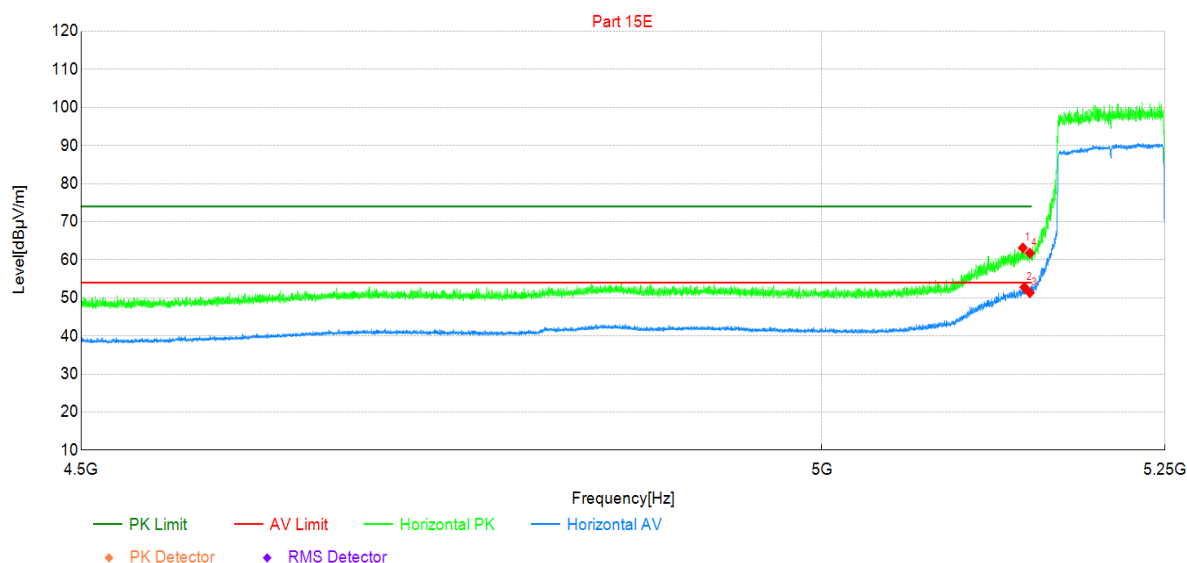


Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5145	48.06	63.14	15.08	74.00	10.86	PK	Horizo	PASS
2	5146	37.69	52.78	15.09	54.00	1.22	AV	Horizo	PASS
3	5150	36.25	51.36	15.11	54.00	2.64	AV	Horizo	PASS
4	5150	46.65	61.76	15.11	74.00	12.24	PK	Horizo	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level


Test Report

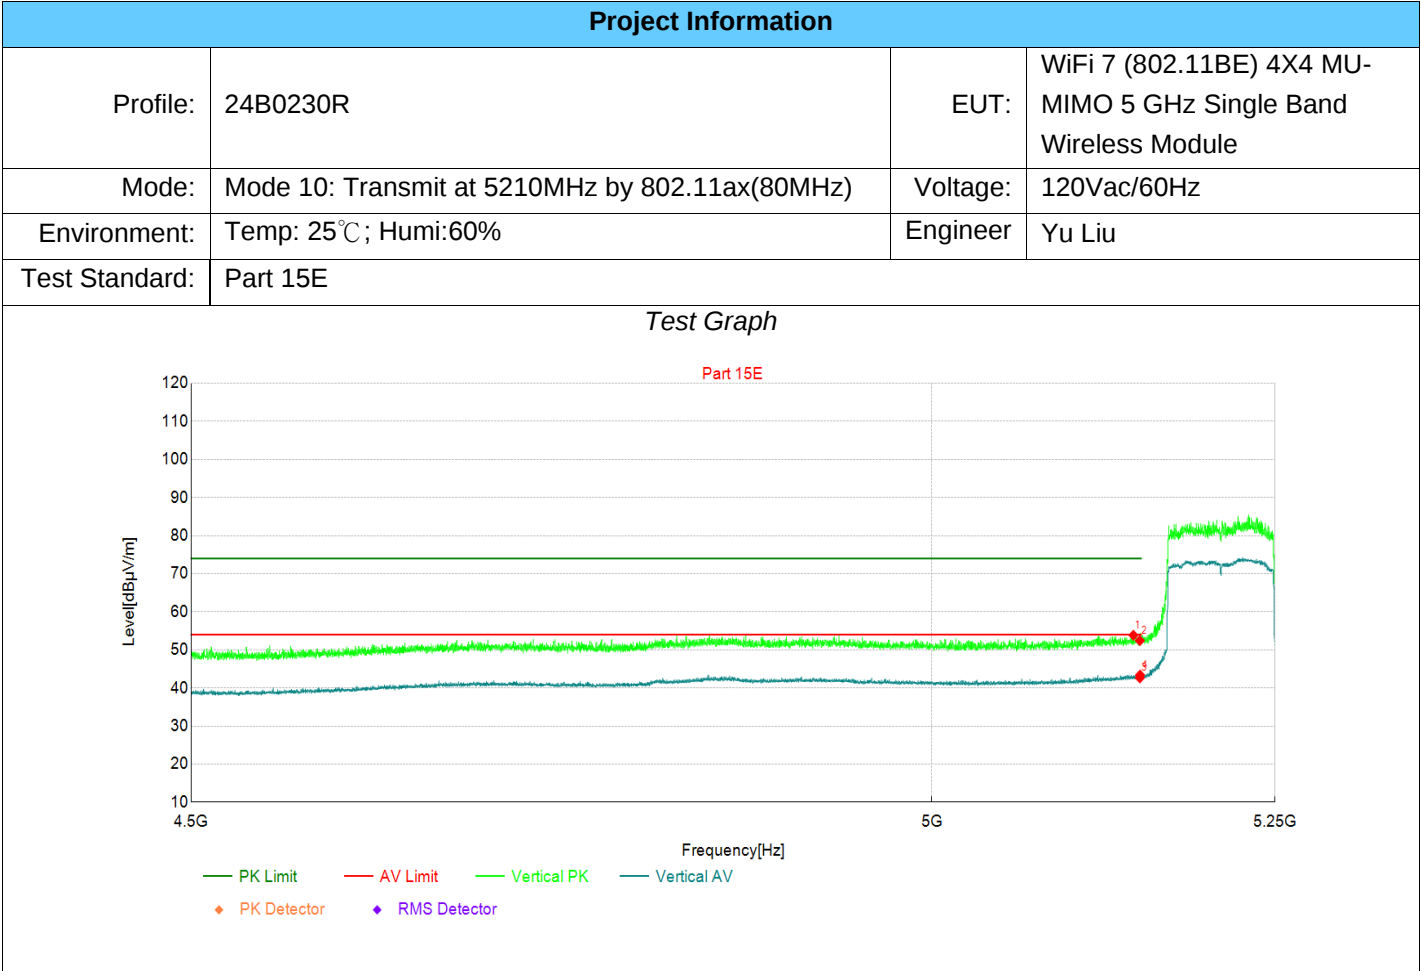

Suspected Data List									
NO	Frequency [MHz]	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Det	Pol	Verdict
1	5145	38.76	53.84	15.08	74.00	20.16	PK	Vertic	PASS
2	5150	37.32	52.43	15.11	74.00	21.57	PK	Vertic	PASS
3	5150	27.52	42.63	15.11	54.00	11.37	AV	Vertic	PASS
4	5150	28.29	43.40	15.11	54.00	10.60	AV	Vertic	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level

Test Report

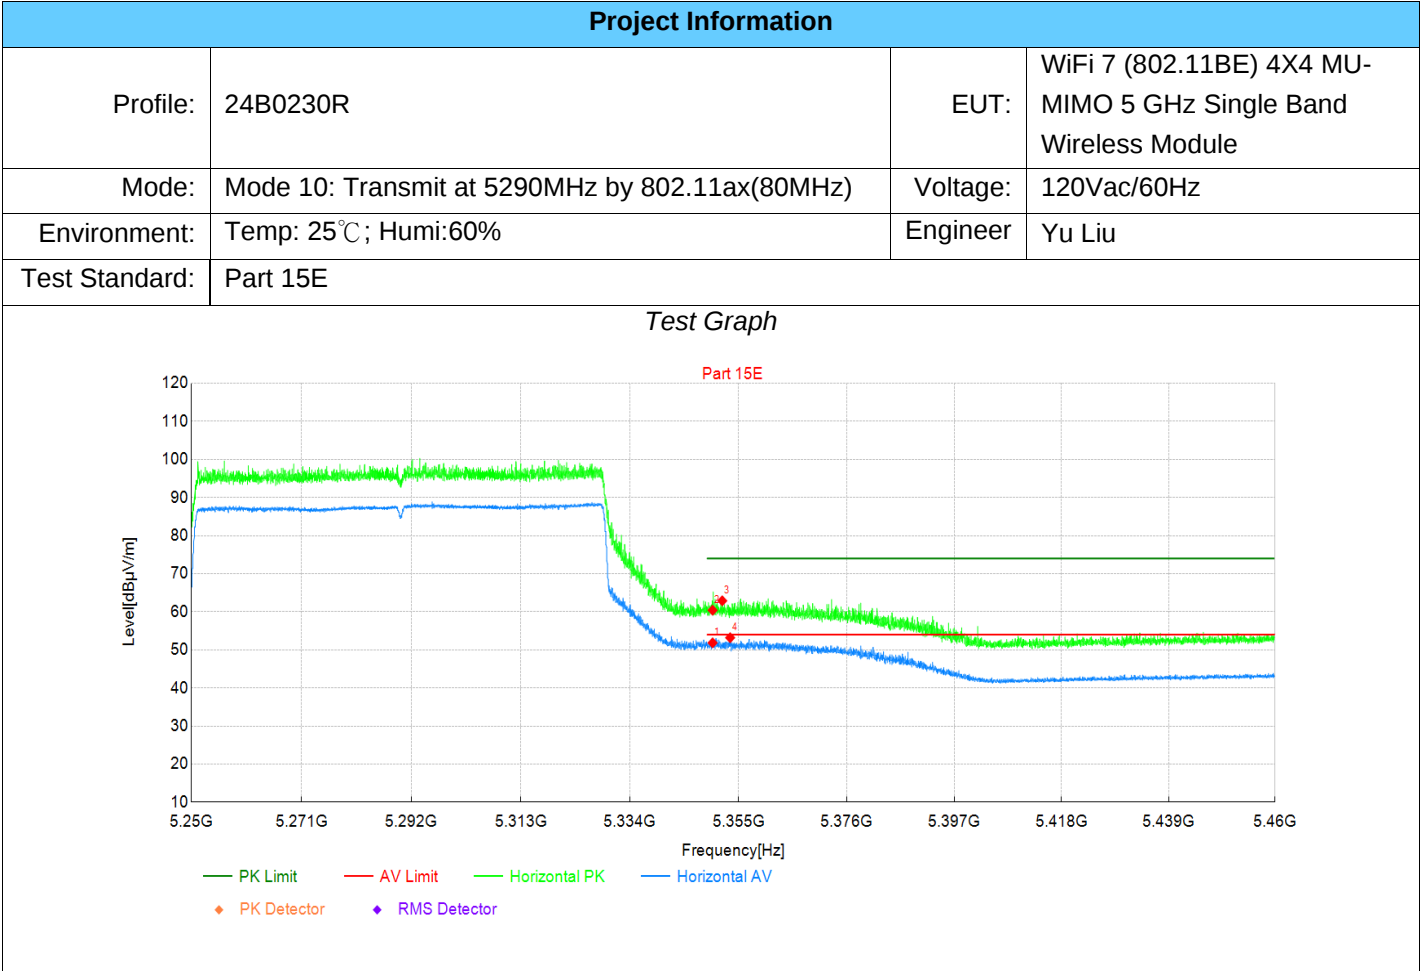

Suspected Data List									
NO	Frequency [MHz]	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Det	Pol	Verdict
1	5350	36.13	51.84	15.71	54.00	2.16	AV	Horizo	PASS
2	5350	44.71	60.42	15.71	74.00	13.58	PK	Horizo	PASS
3	5352	47.18	62.89	15.71	74.00	11.11	PK	Horizo	PASS
4	5353	37.48	53.19	15.71	54.00	0.81	AV	Horizo	PASS


Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level

Test Report

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 10: Transmit at 5290MHz by 802.11ax(80MHz)	Voltage:	120Vac/60Hz
Environment:	Temp: 25°C; Humi:60%	Engineer	Yu Liu
Test Standard:	Part 15E		

Test Graph

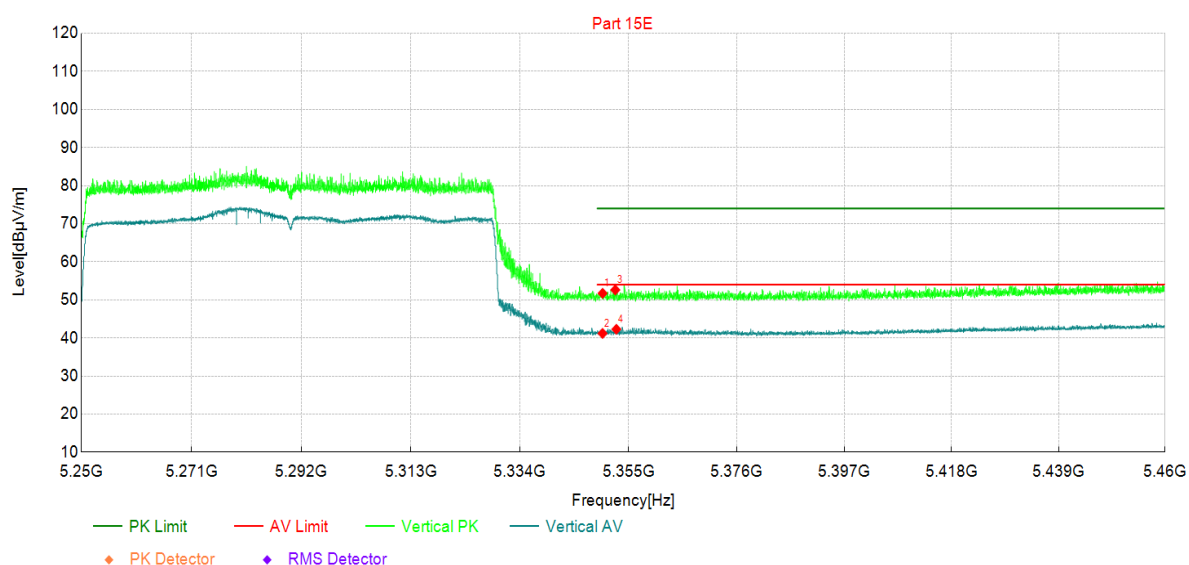

Suspected Data List

NO	Frequency [MHz]	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Det	Pol	Verdict
1	5350	36.01	51.72	15.71	74.00	22.28	PK	Vertic	PASS
2	5350	25.48	41.19	15.71	54.00	12.81	AV	Vertic	PASS
3	5352	36.90	52.61	15.71	74.00	21.39	PK	Vertic	PASS
4	5353	26.57	42.28	15.71	54.00	11.72	AV	Vertic	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

Test Report

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 10: Transmit at 5530MHz by 802.11ax(80MHz)	Voltage:	120Vac/60Hz
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	Part 15E		

Test Graph

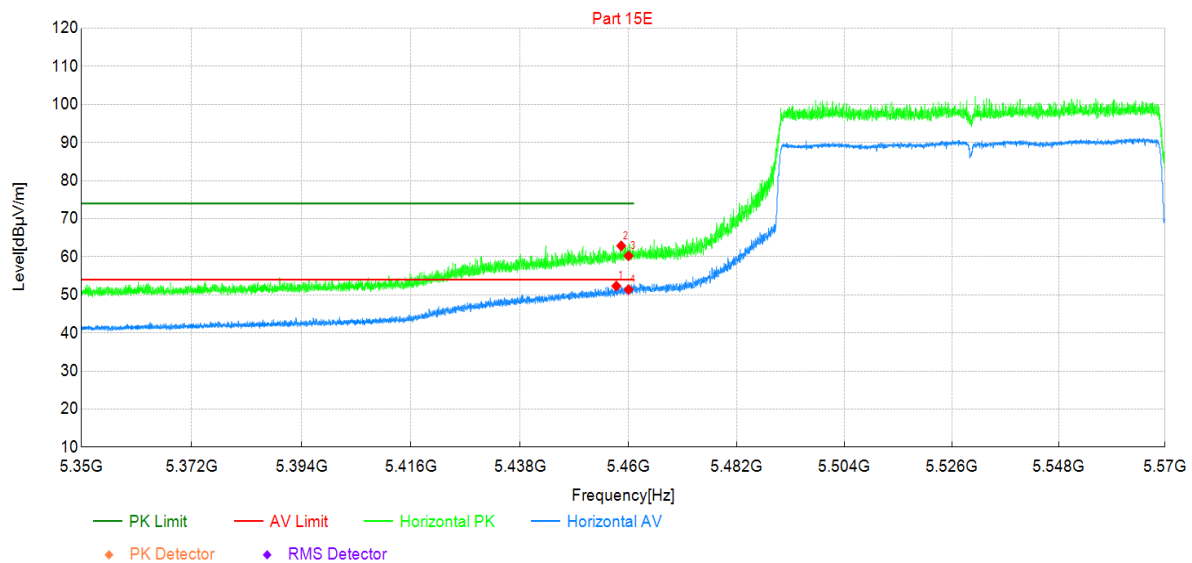


Suspected Data List

NO	Frequency [MHz]	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Det	Pol	Verdict
1	5458	36.00	52.31	16.31	54.00	1.69	AV	Horizo	PASS
2	5459	46.54	62.86	16.32	74.00	11.14	PK	Horizo	PASS
3	5460	43.91	60.25	16.34	74.00	13.75	PK	Horizo	PASS
4	5460	35.06	51.40	16.34	54.00	2.60	AV	Horizo	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Test Report

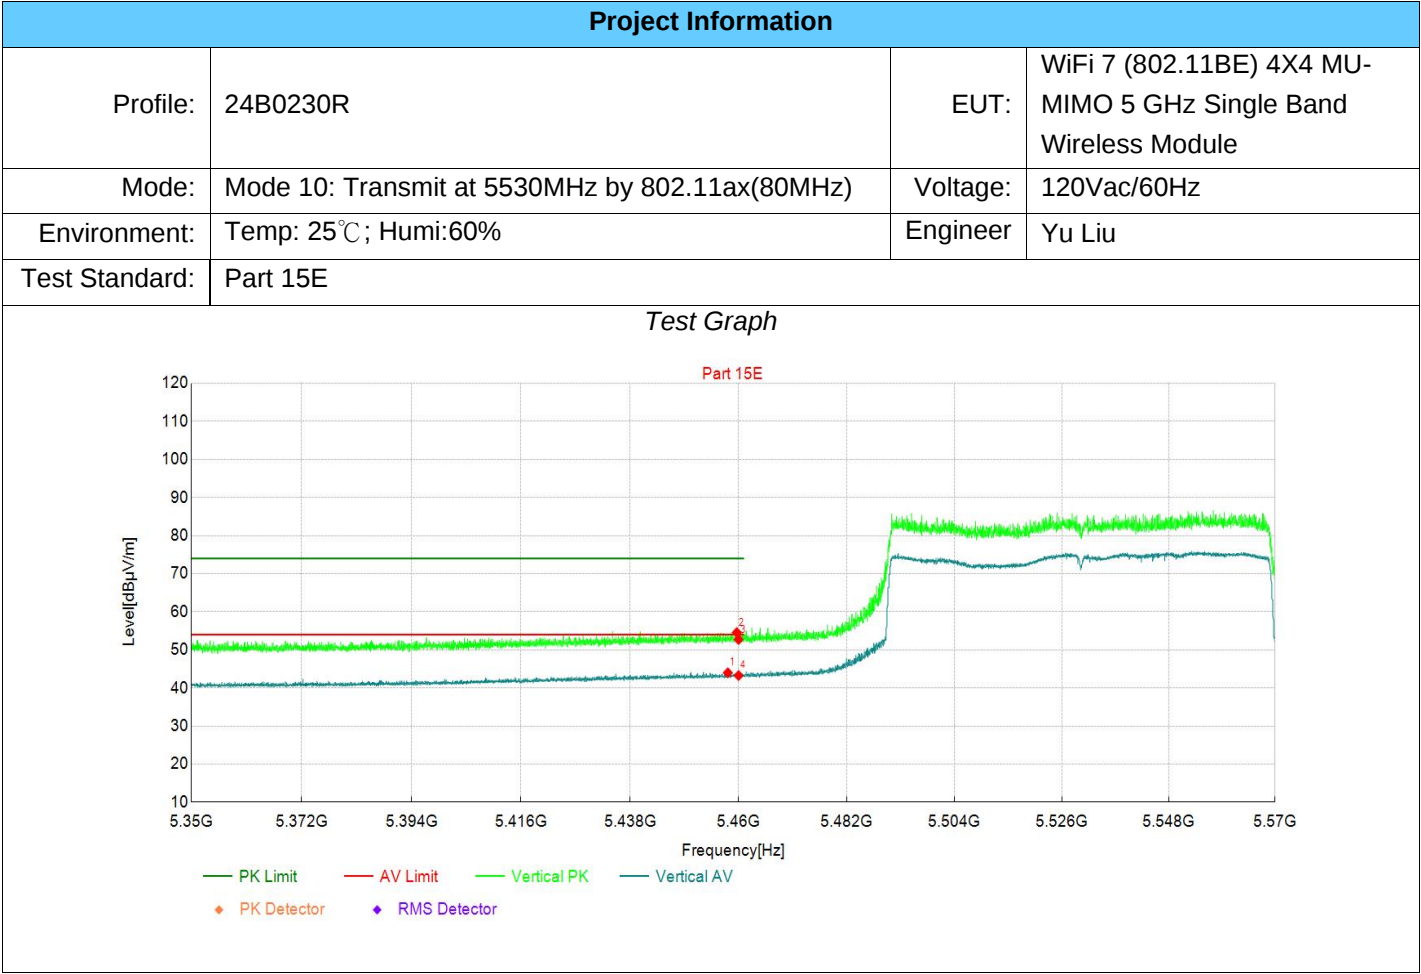

Suspected Data List									
NO	Frequency [MHz]	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Det	Pol	Verdict
1	5458	27.67	43.98	16.31	54.00	10.02	AV	Vertic	PASS
2	5460	38.22	54.56	16.34	74.00	19.44	PK	Vertic	PASS
3	5460	36.37	52.71	16.34	74.00	21.29	PK	Vertic	PASS
4	5460	26.93	43.27	16.34	54.00	10.73	AV	Vertic	PASS


Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level

Test Report

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 11: Transmit at 5250MHz by 802.11ax(160MHz)	Voltage:	120Vac/60Hz
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	Part 15E		

Test Graph

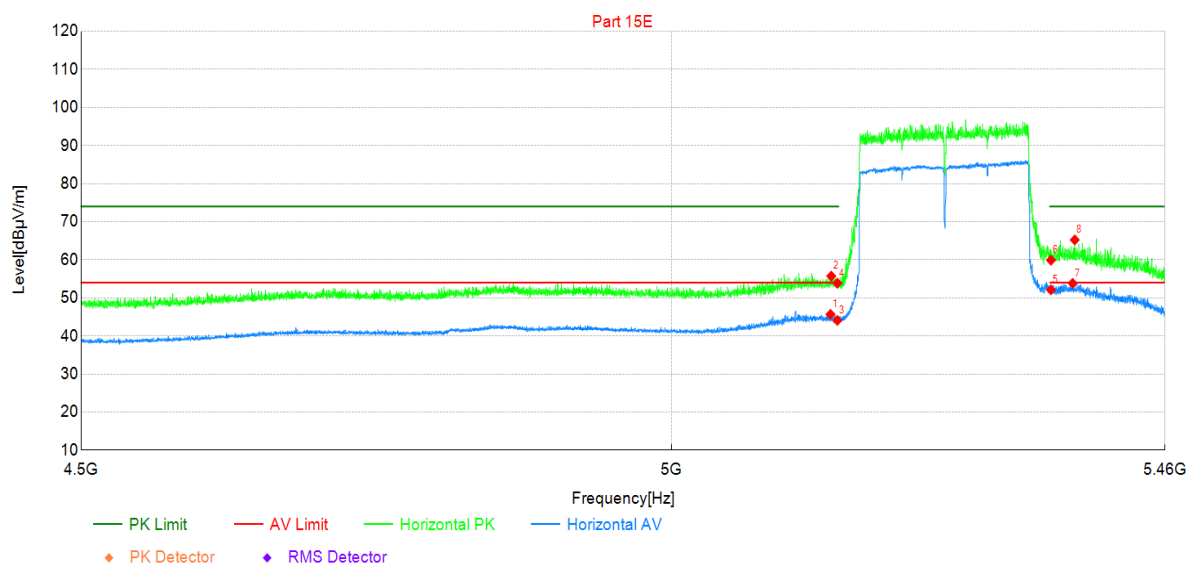

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5144	30.60	45.67	15.07	54.00	8.33	AV	Horizo	PASS
2	5144	40.64	55.72	15.08	74.00	18.28	PK	Horizo	PASS
3	5150	28.99	44.10	15.11	54.00	9.90	AV	Horizo	PASS
4	5150	38.75	53.86	15.11	74.00	20.14	PK	Horizo	PASS
5	5350	36.40	52.11	15.71	54.00	1.89	AV	Horizo	PASS
6	5350	44.20	59.91	15.71	74.00	14.09	PK	Horizo	PASS
7	5371	38.14	53.82	15.68	54.00	0.18	AV	Horizo	PASS
8	5373	49.56	65.24	15.68	74.00	8.76	PK	Horizo	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

Test Report

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 11: Transmit at 5250MHz by 802.11ax(160MHz)	Voltage:	120Vac/60Hz
Environment:	Temp: 25°C; Humi:60%	Engineer	Yu Liu
Test Standard:	Part 15E		

Test Graph

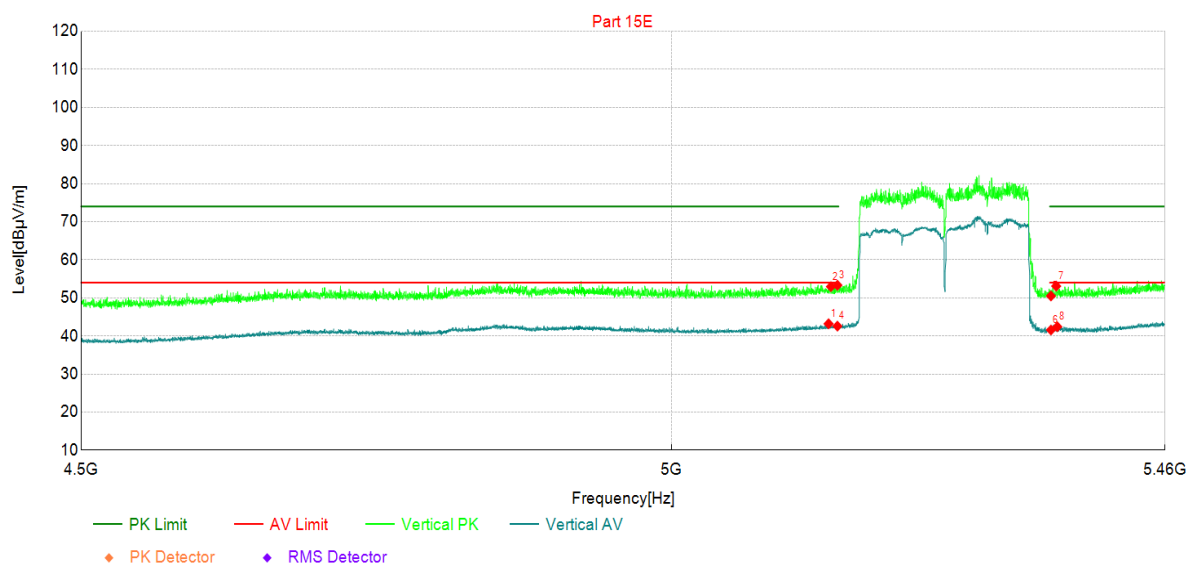


Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5142	28.13	43.19	15.06	54.00	10.81	AV	Vertic	PASS
2	5144	37.87	52.95	15.08	74.00	21.05	PK	Vertic	PASS
3	5150	38.20	53.31	15.11	74.00	20.69	PK	Vertic	PASS
4	5150	27.47	42.58	15.11	54.00	11.42	AV	Vertic	PASS
5	5350	34.78	50.49	15.71	74.00	23.51	PK	Vertic	PASS
6	5350	25.85	41.56	15.71	54.00	12.44	AV	Vertic	PASS
7	5355	37.38	53.08	15.70	74.00	20.92	PK	Vertic	PASS
8	5356	26.71	42.41	15.70	54.00	11.59	AV	Vertic	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level


Test Report

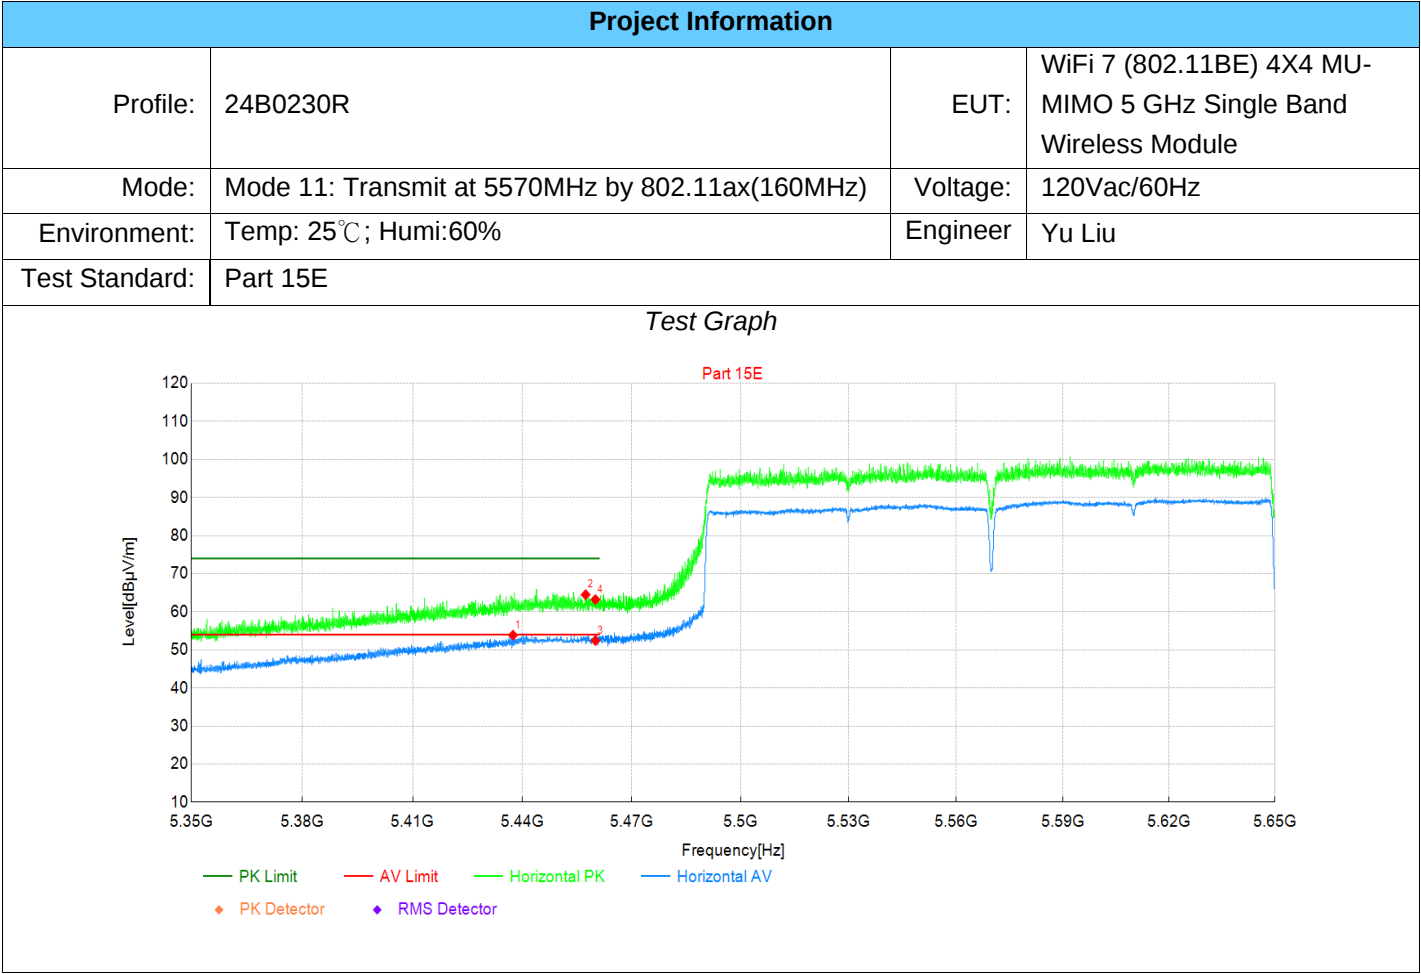

Suspected Data List									
NO	Frequency [MHz]	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Det	Pol	Verdict
1	5437	37.78	53.86	16.08	54.00	0.14	AV	Horizo	PASS
2	5457	48.18	64.49	16.31	74.00	9.51	PK	Horizo	PASS
3	5460	36.12	52.46	16.34	54.00	1.54	AV	Horizo	PASS
4	5460	46.86	63.20	16.34	74.00	10.80	PK	Horizo	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level


Test Report

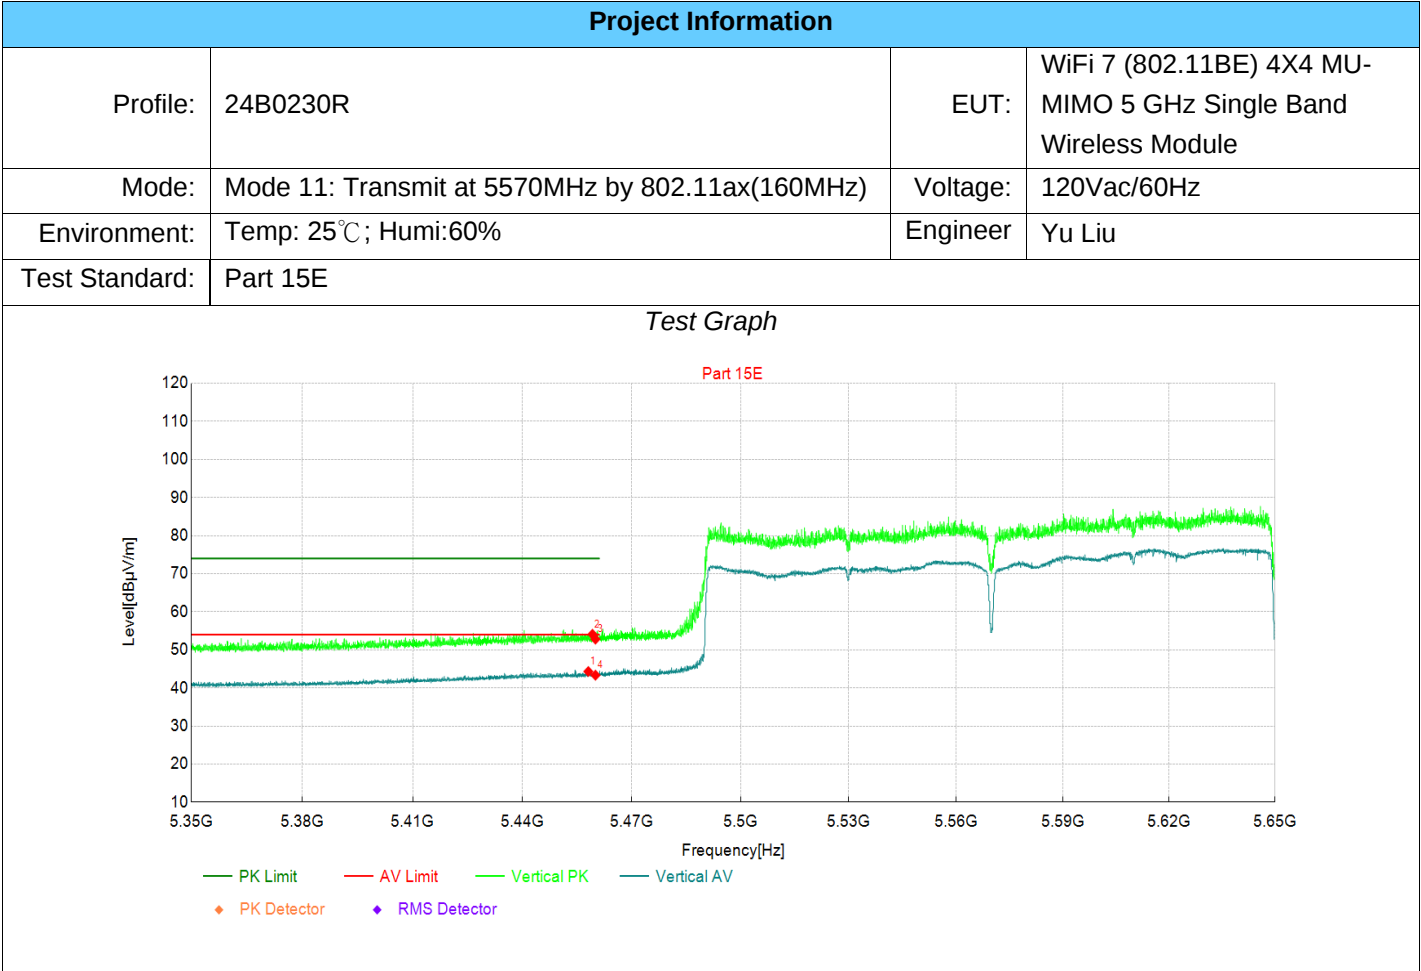

Suspected Data List									
NO	Frequency [MHz]	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Det	Pol	Verdict
1	5458	28.00	44.31	16.31	54.00	9.69	AV	Vertic	PASS
2	5459	37.76	54.09	16.33	74.00	19.91	PK	Vertic	PASS
3	5460	36.47	52.81	16.34	74.00	21.19	PK	Vertic	PASS
4	5460	27.01	43.35	16.34	54.00	10.65	AV	Vertic	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level


Test Report

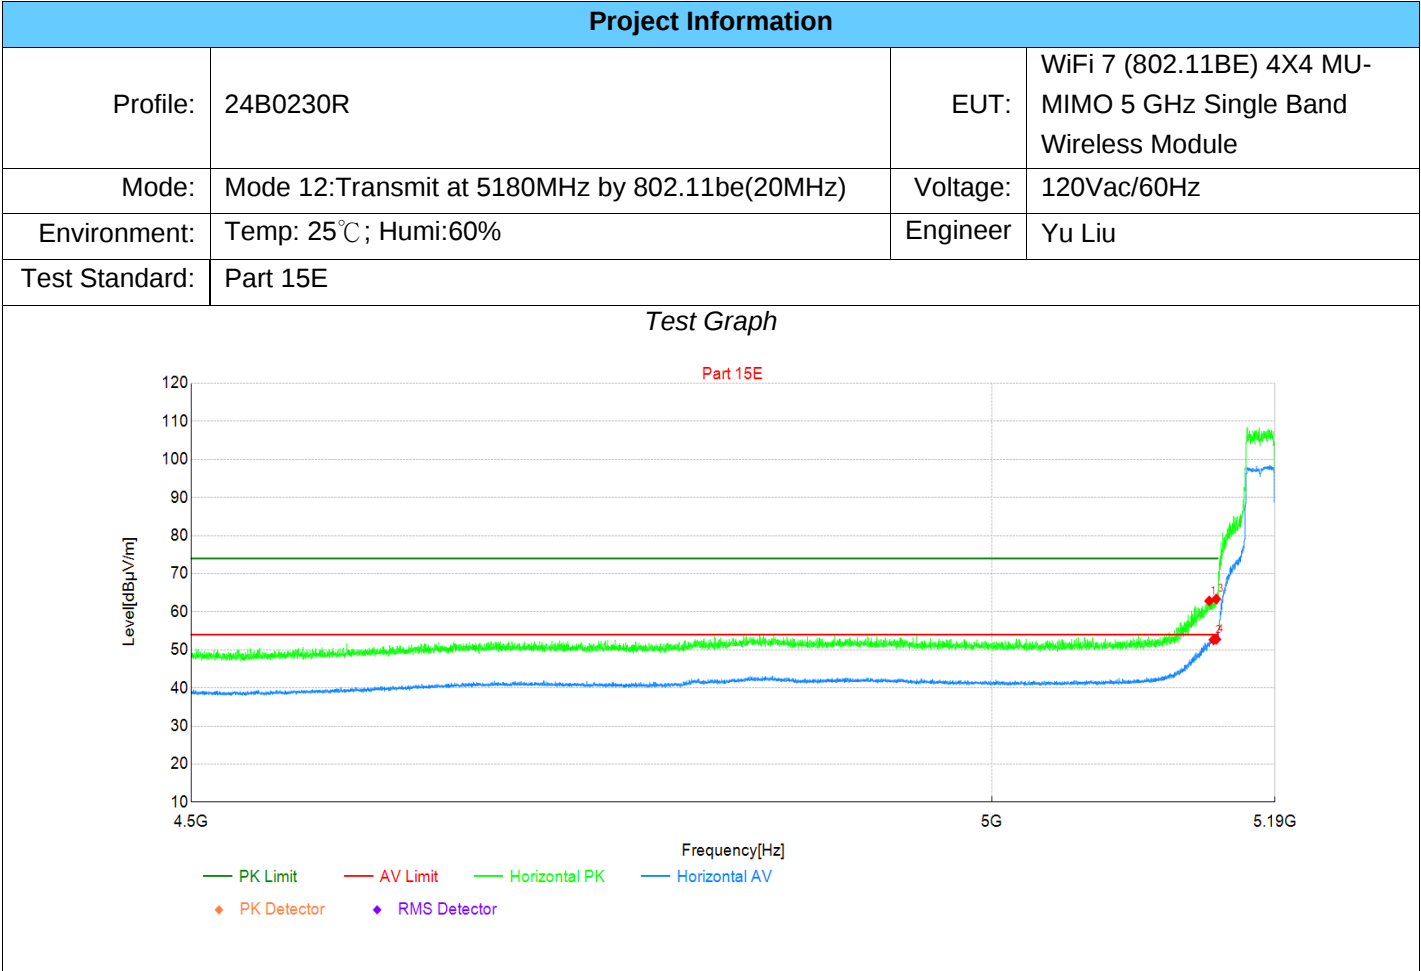

Suspected Data List									
NO	Frequency [MHz]	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Det	Pol	Verdict
1	5145	47.77	62.85	15.08	74.00	11.15	PK	Horizo	PASS
2	5148	37.54	52.64	15.10	54.00	1.36	AV	Horizo	PASS
3	5150	48.25	63.36	15.11	74.00	10.64	PK	Horizo	PASS
4	5150	37.66	52.77	15.11	54.00	1.23	AV	Horizo	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level


Test Report

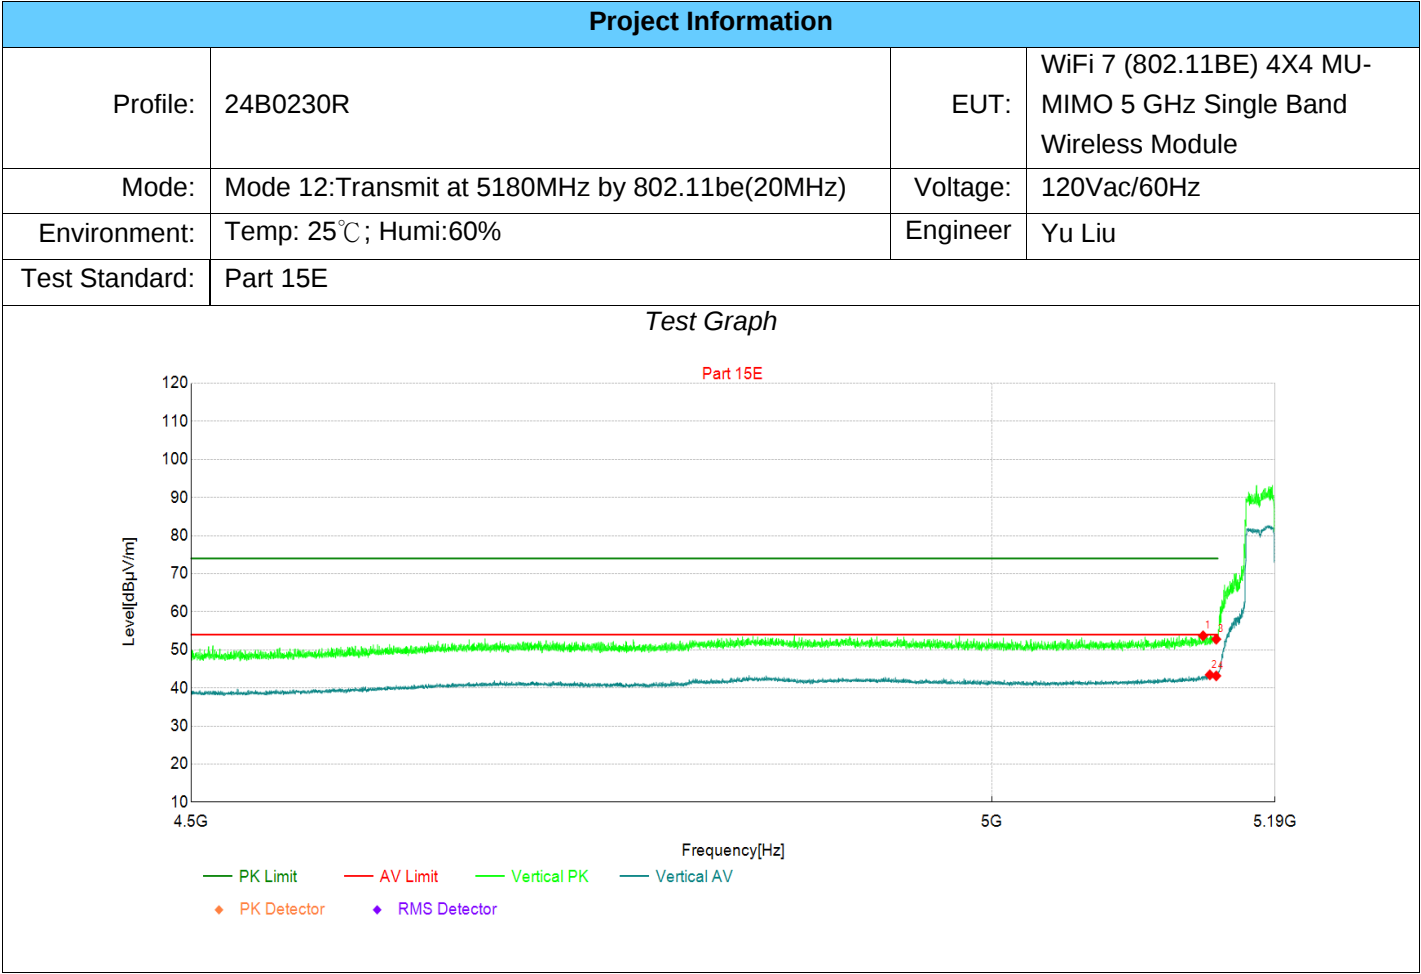

Suspected Data List									
NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5141	38.64	53.70	15.06	74.00	20.30	PK	Vertic	PASS
2	5146	28.36	43.44	15.08	54.00	10.56	AV	Vertic	PASS
3	5150	37.69	52.80	15.11	74.00	21.20	PK	Vertic	PASS
4	5150	28.05	43.16	15.11	54.00	10.84	AV	Vertic	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level


Test Report

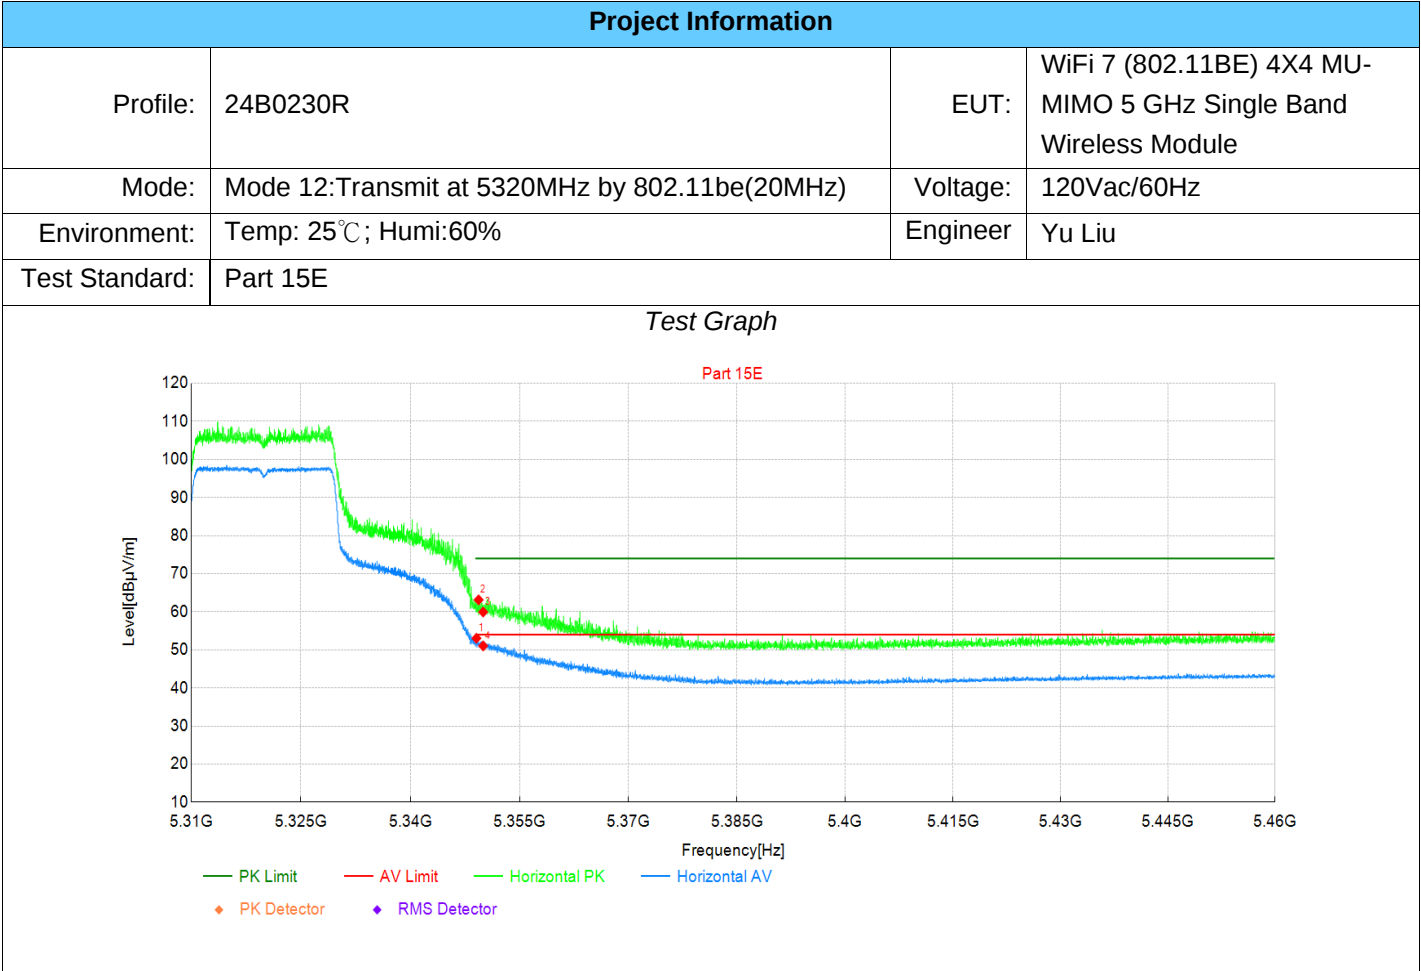

Suspected Data List									
NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5349	37.33	53.04	15.71	54.00	0.96	AV	Horizo	PASS
2	5349	47.42	63.13	15.71	74.00	10.87	PK	Horizo	PASS
3	5350	44.24	59.95	15.71	74.00	14.05	PK	Horizo	PASS
4	5350	35.33	51.04	15.71	54.00	2.96	AV	Horizo	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level


Test Report

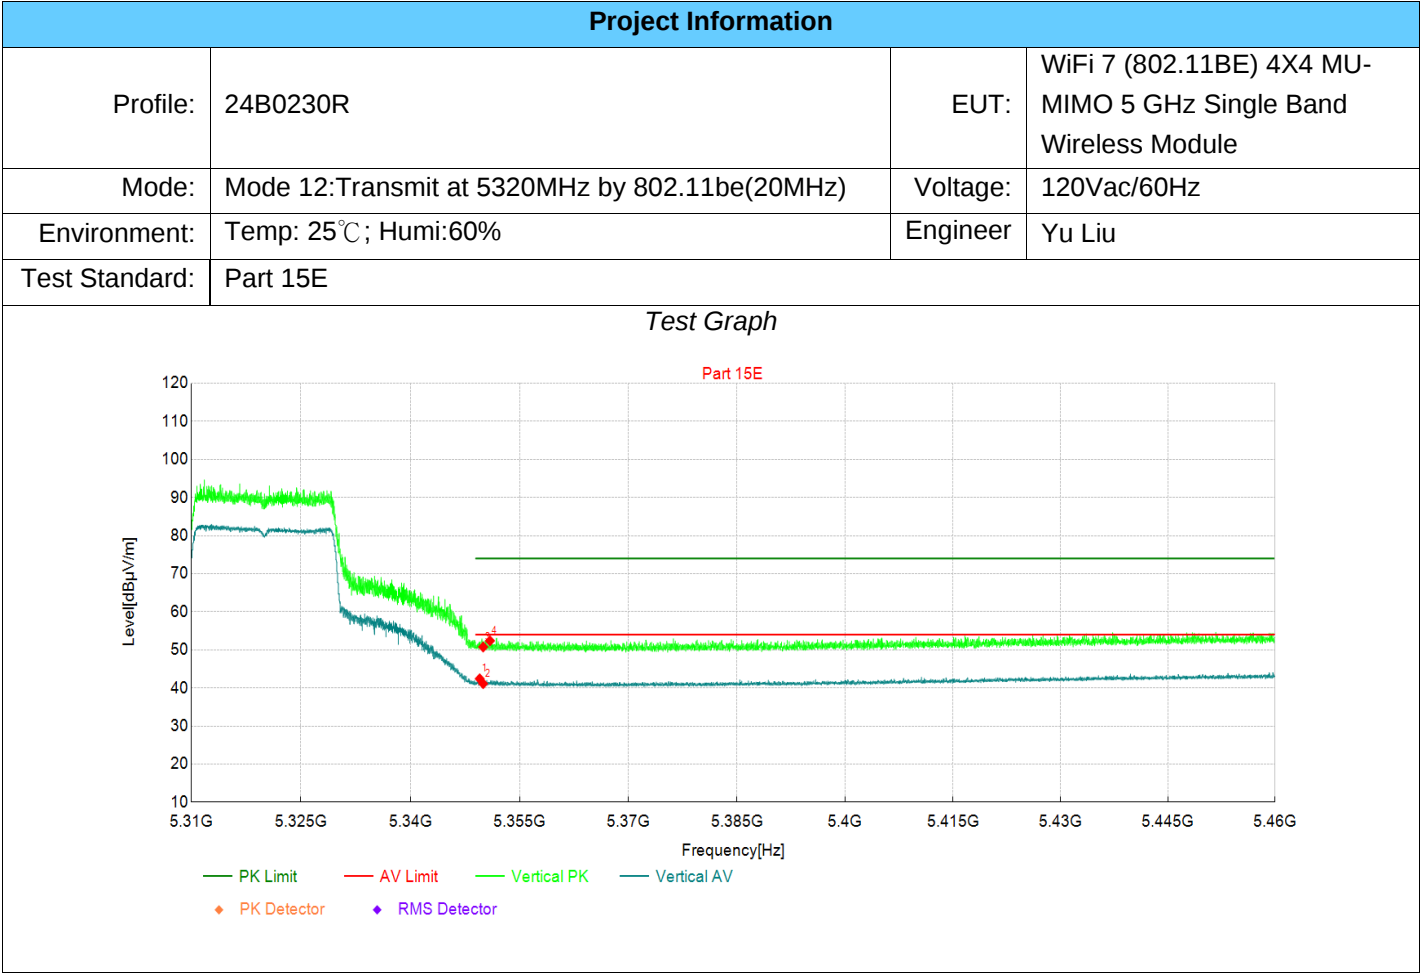

Suspected Data List									
NO	Frequency [MHz]	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Det	Pol	Verdict
1	5350	26.70	42.41	15.71	54.00	11.59	AV	Vertic	PASS
2	5350	25.41	41.12	15.71	54.00	12.88	AV	Vertic	PASS
3	5350	35.05	50.76	15.71	74.00	23.24	PK	Vertic	PASS
4	5351	36.67	52.38	15.71	74.00	21.62	PK	Vertic	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level


Test Report

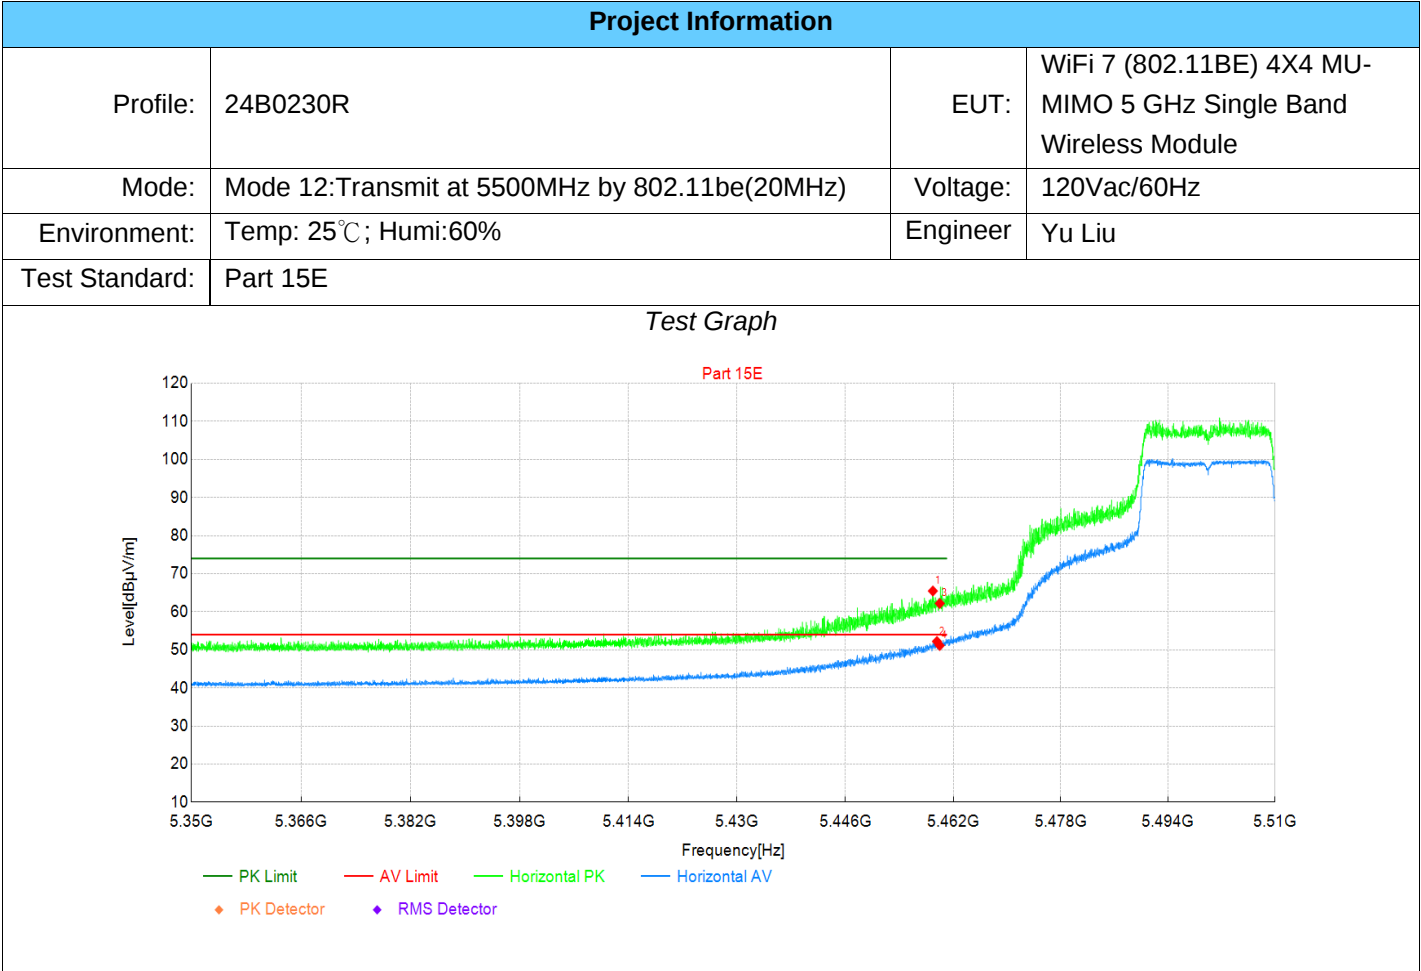

Suspected Data List									
NO	Frequency [MHz]	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Det	Pol	Verdict
1	5459	49.14	65.47	16.33	74.00	8.53	PK	Horizo	PASS
2	5460	35.87	52.21	16.34	54.00	1.79	AV	Horizo	PASS
3	5460	45.85	62.19	16.34	74.00	11.81	PK	Horizo	PASS
4	5460	34.81	51.15	16.34	54.00	2.85	AV	Horizo	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level


Test Report

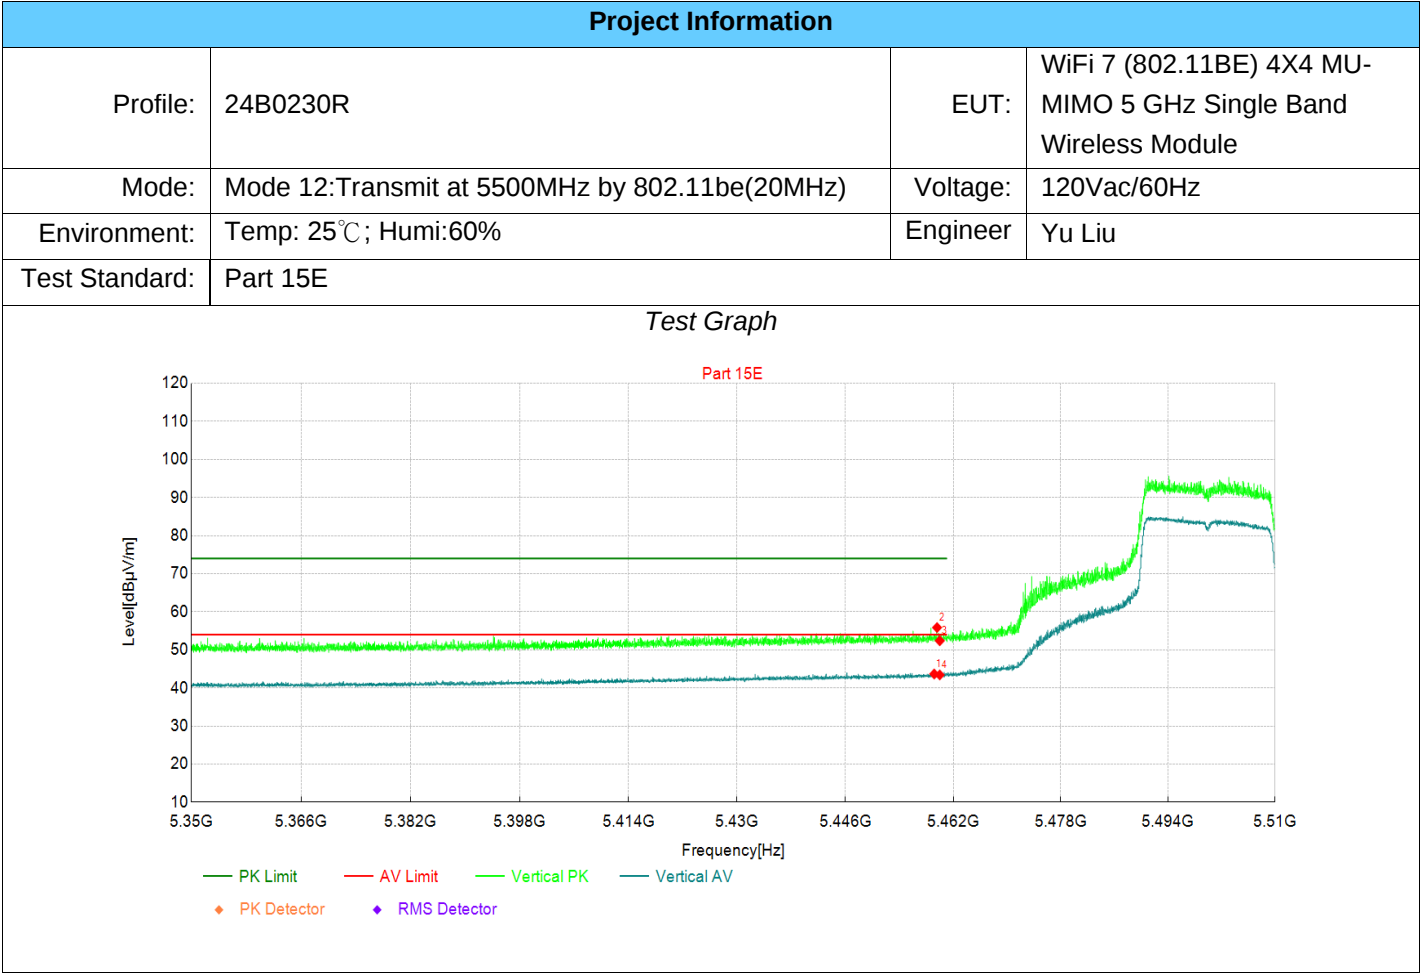

Suspected Data List									
NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5459	27.33	43.66	16.33	54.00	10.34	AV	Vertic	PASS
2	5460	39.52	55.86	16.34	74.00	18.14	PK	Vertic	PASS
3	5460	36.06	52.40	16.34	74.00	21.60	PK	Vertic	PASS
4	5460	27.08	43.42	16.34	54.00	10.58	AV	Vertic	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level


Test Report

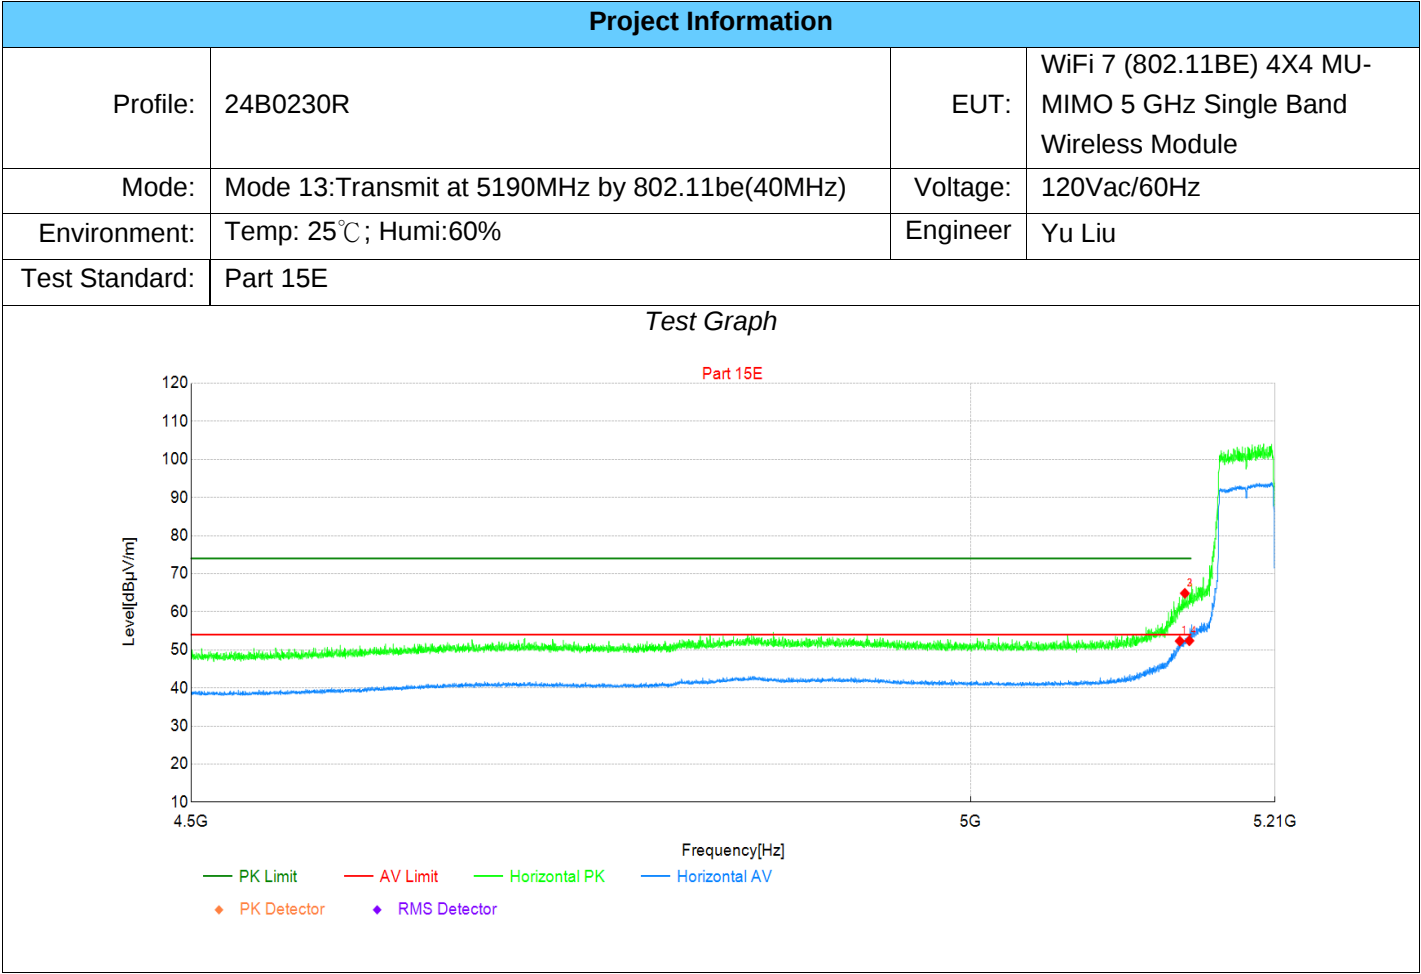

Suspected Data List									
NO	Frequency [MHz]	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Det	Pol	Verdict
1	5143	37.24	52.31	15.07	54.00	1.69	AV	Horizo	PASS
2	5147	49.76	64.85	15.09	74.00	9.15	PK	Horizo	PASS
3	5147	49.76	64.85	15.09	74.00	9.15	PK	Horizo	PASS
4	5150	37.29	52.40	15.11	54.00	1.60	AV	Horizo	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level


Test Report

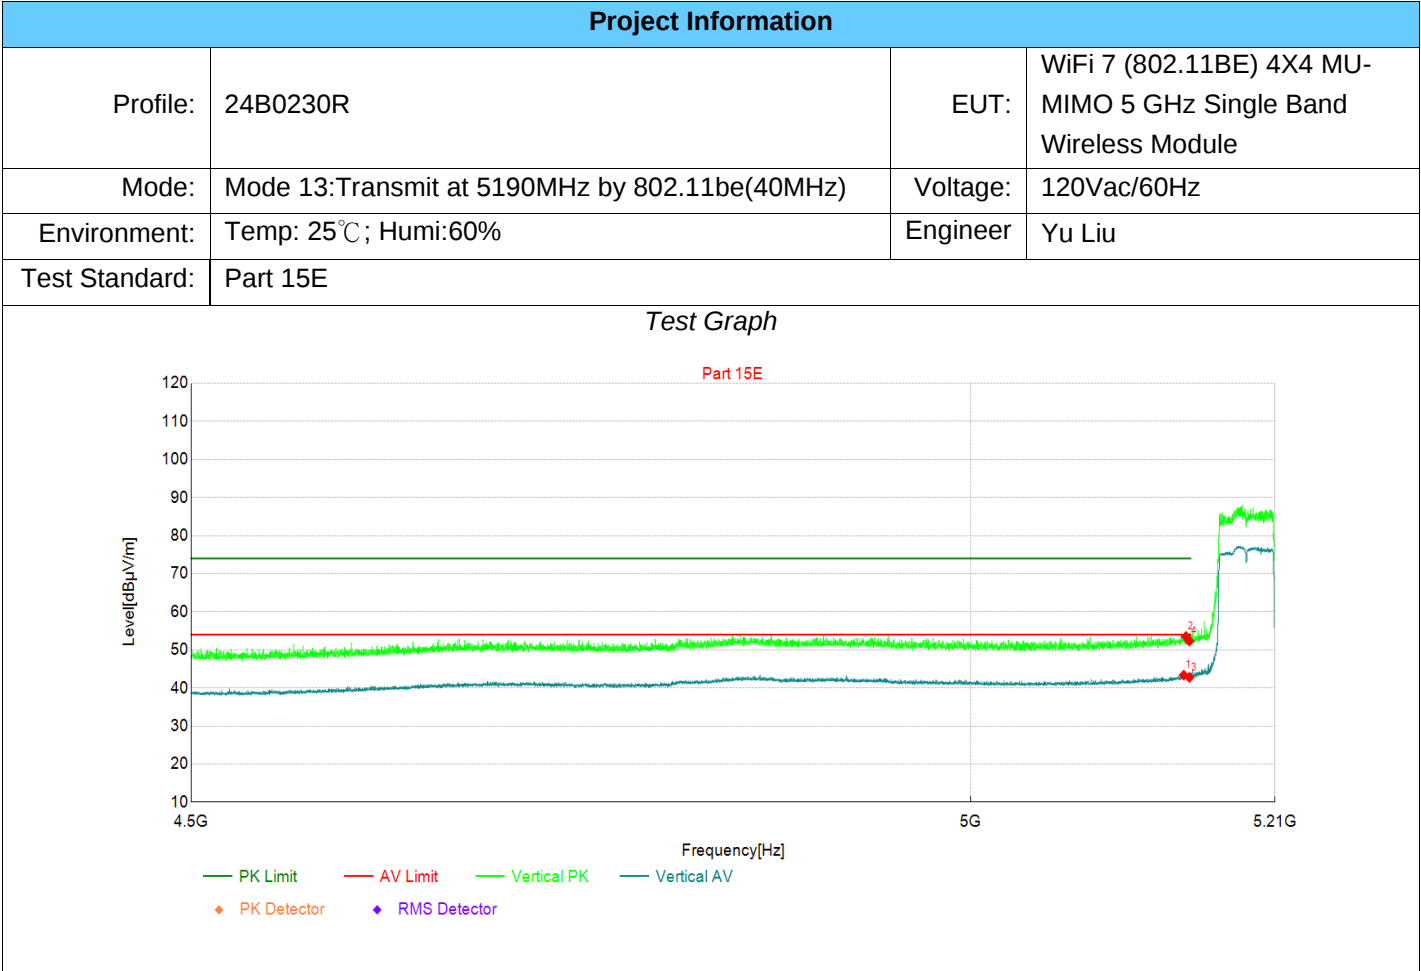

Suspected Data List									
NO	Frequency [MHz]	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Det	Pol	Verdict
1	5146	28.27	43.36	15.09	54.00	10.64	AV	Vertic	PASS
2	5148	38.41	53.51	15.10	74.00	20.49	PK	Vertic	PASS
3	5150	27.66	42.77	15.11	54.00	11.23	AV	Vertic	PASS
4	5150	37.20	52.31	15.11	74.00	21.69	PK	Vertic	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level


Test Report

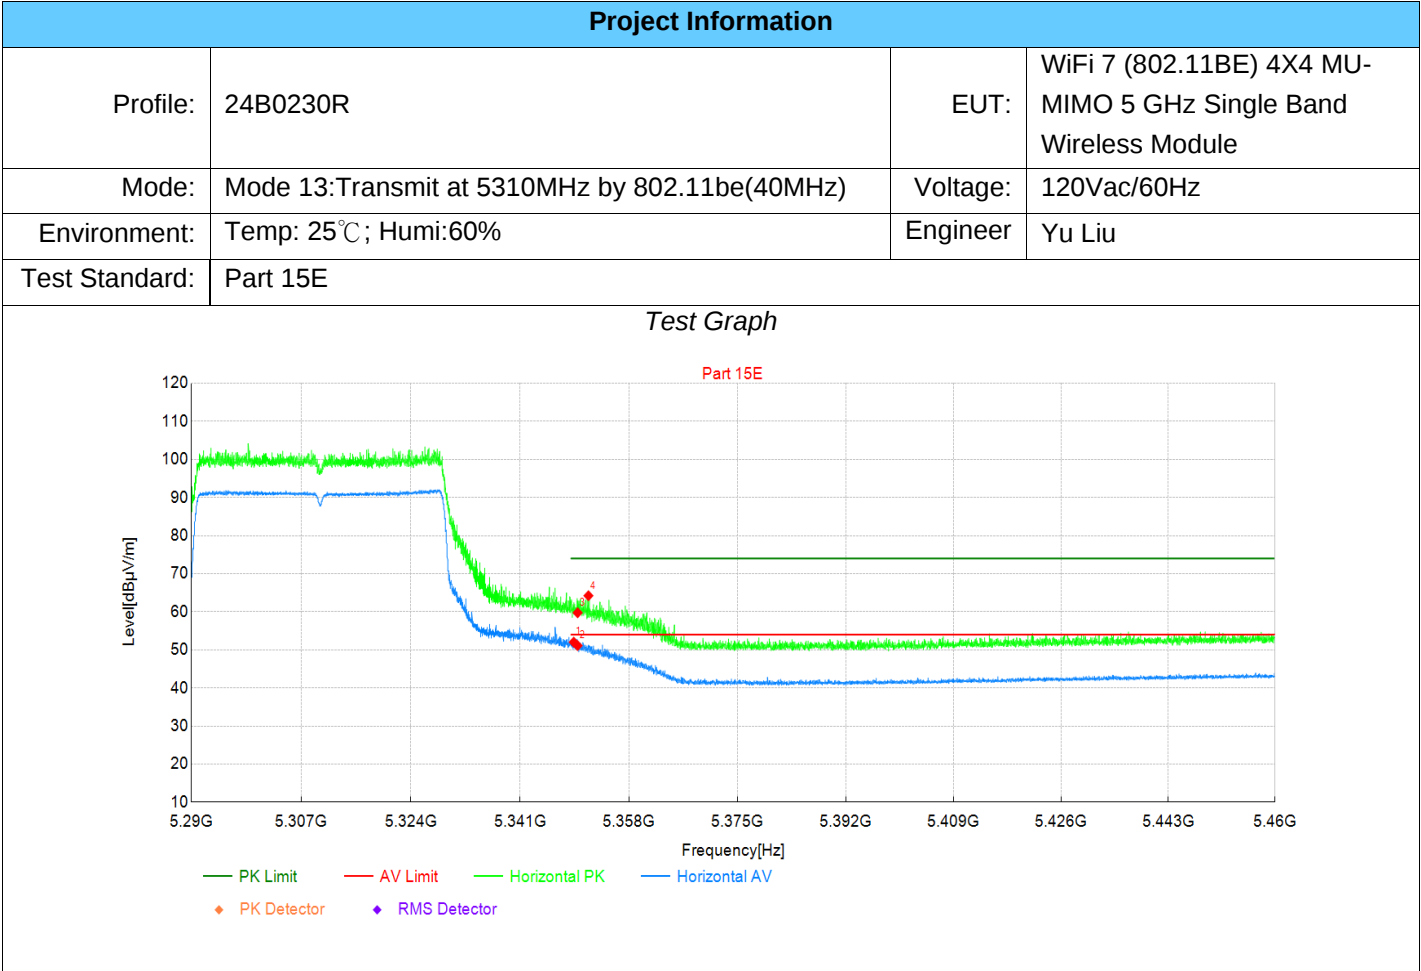

Suspected Data List									
NO	Frequency [MHz]	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Det	Pol	Verdict
1	5349	36.32	52.03	15.71	54.00	1.97	AV	Horizo	PASS
2	5350	35.40	51.11	15.71	54.00	2.89	AV	Horizo	PASS
3	5350	44.04	59.75	15.71	74.00	14.25	PK	Horizo	PASS
4	5352	48.52	64.23	15.71	74.00	9.77	PK	Horizo	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level


Test Report

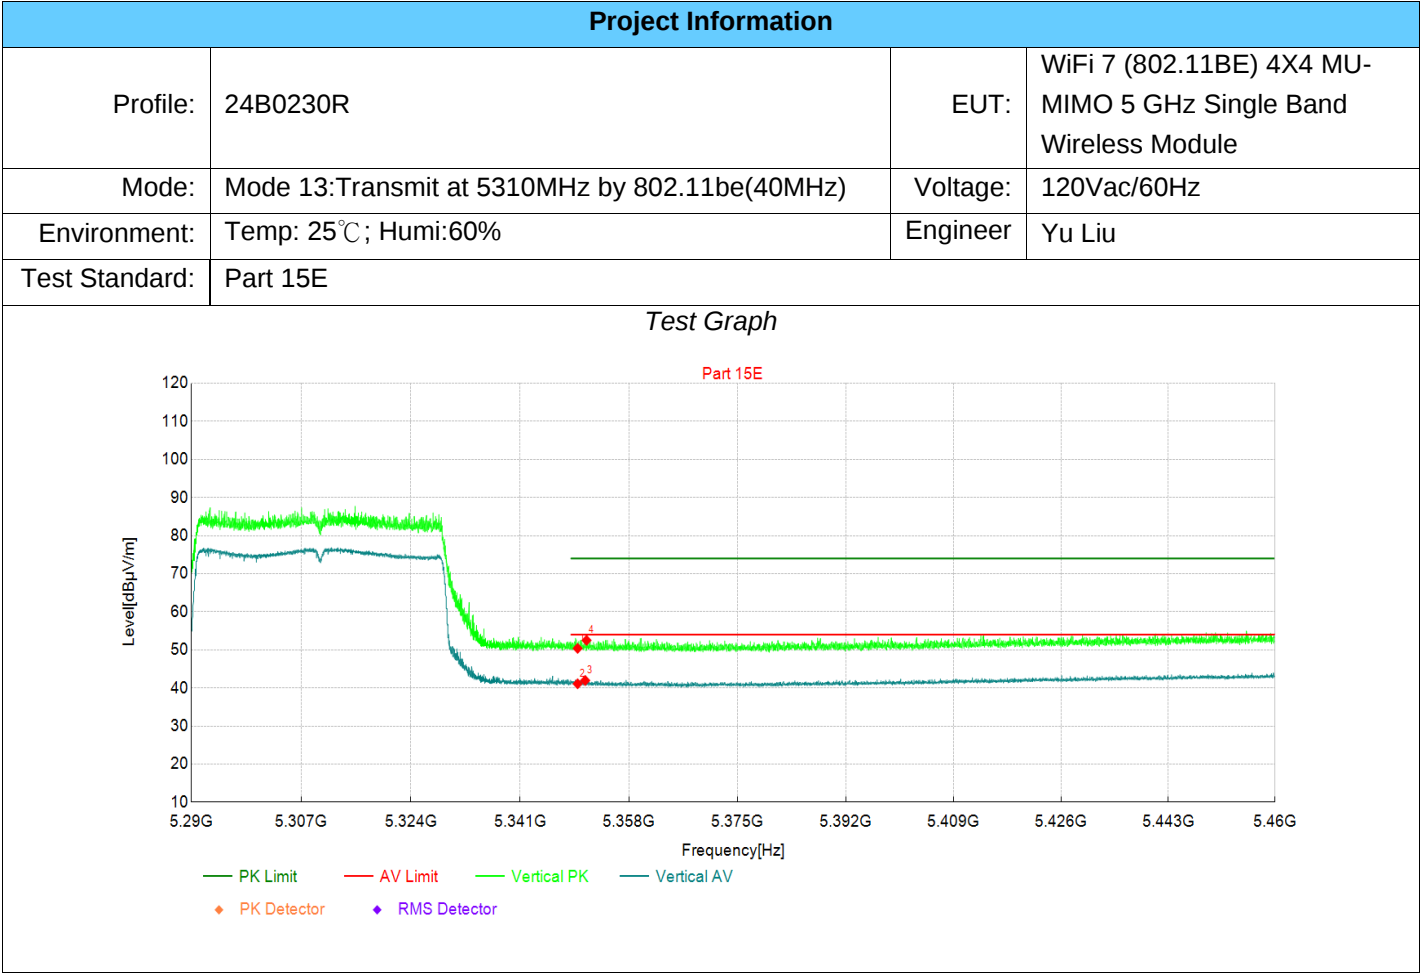

Suspected Data List									
NO	Frequency [MHz]	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Det	Pol	Verdict
1	5350	34.68	50.39	15.71	74.00	23.61	PK	Vertic	PASS
2	5350	25.38	41.09	15.71	54.00	12.91	AV	Vertic	PASS
3	5351	26.25	41.96	15.71	54.00	12.04	AV	Vertic	PASS
4	5351	36.80	52.51	15.71	74.00	21.49	PK	Vertic	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level


Test Report

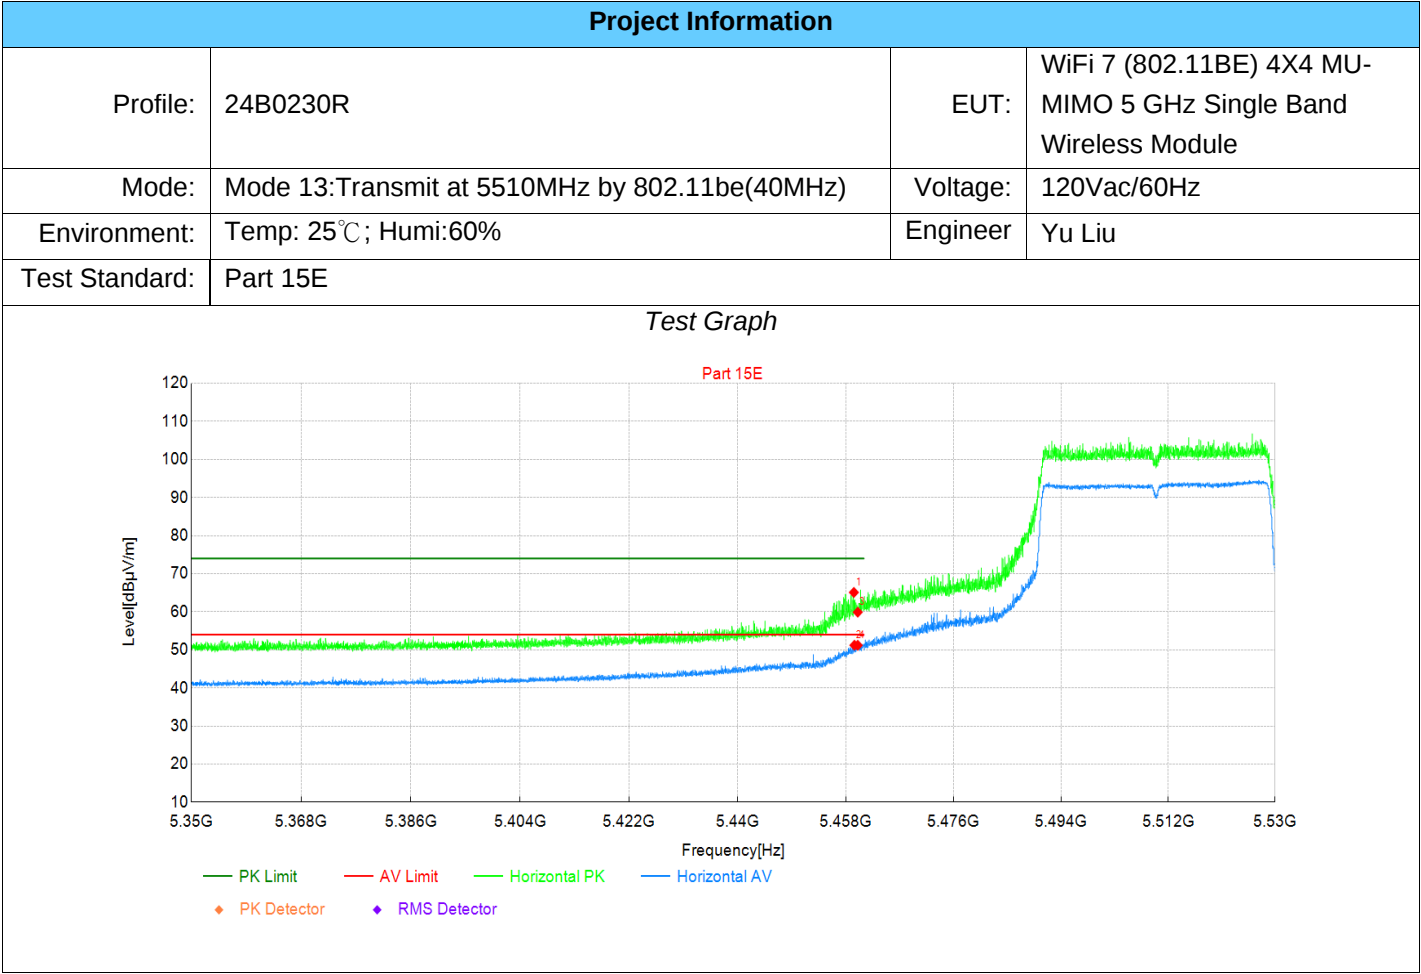

Suspected Data List									
NO	Frequency [MHz]	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Det	Pol	Verdict
1	5459	48.75	65.09	16.34	74.00	8.91	PK	Horizo	PASS
2	5459	34.88	51.22	16.34	54.00	2.78	AV	Horizo	PASS
3	5460	43.56	59.90	16.34	74.00	14.10	PK	Horizo	PASS
4	5460	34.86	51.20	16.34	54.00	2.80	AV	Horizo	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level

Test Report

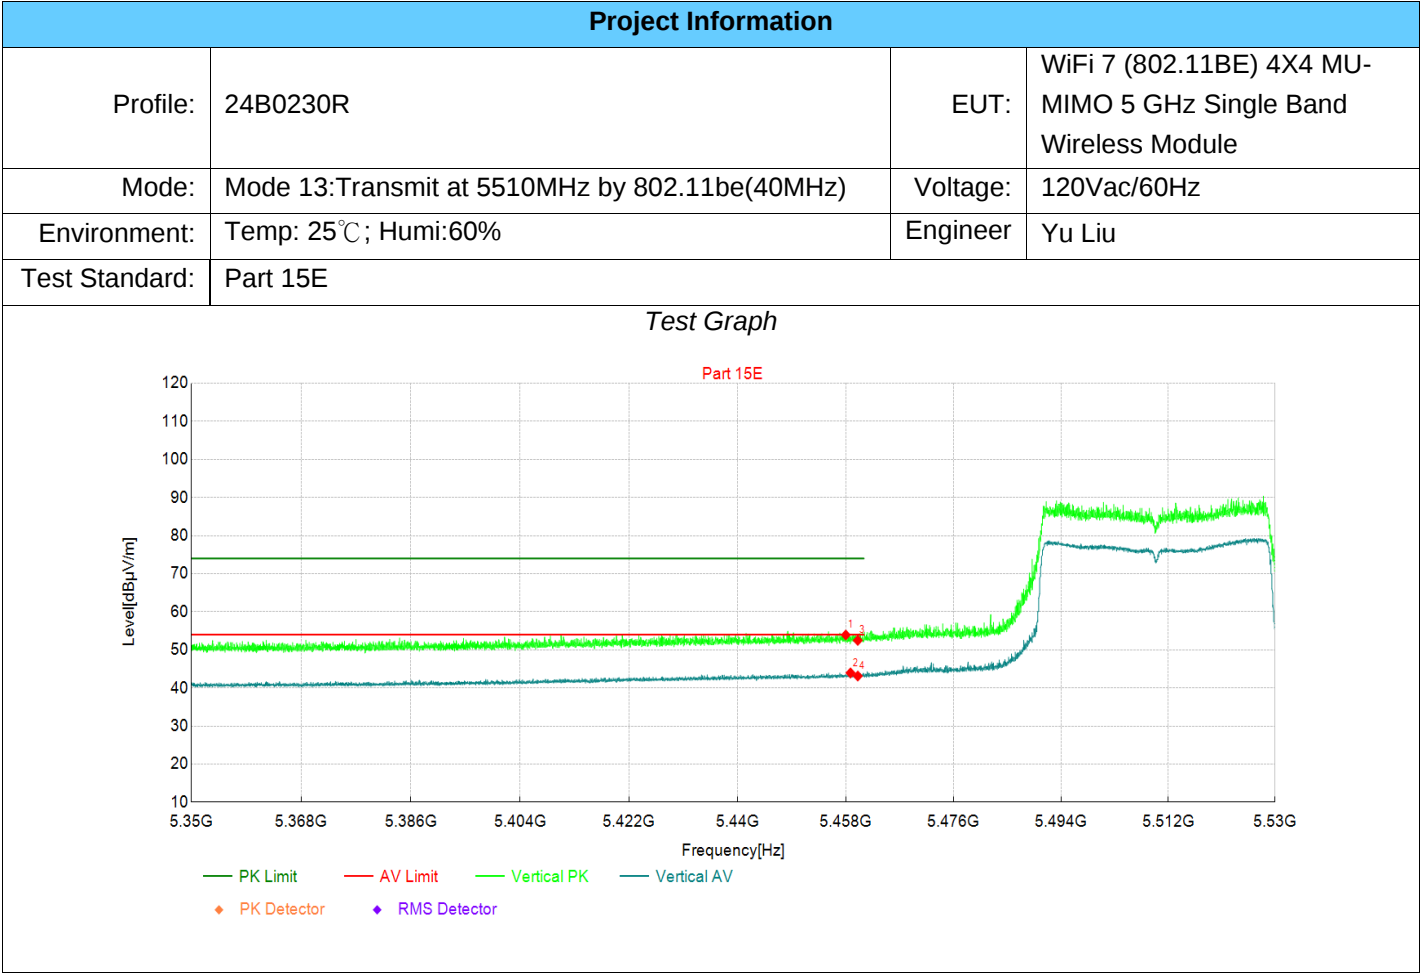

Suspected Data List									
NO	Frequency [MHz]	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Det	Pol	Verdict
1	5458	37.60	53.91	16.31	74.00	20.09	PK	Vertic	PASS
2	5459	27.61	43.94	16.33	54.00	10.06	AV	Vertic	PASS
3	5460	36.15	52.49	16.34	74.00	21.51	PK	Vertic	PASS
4	5460	26.79	43.13	16.34	54.00	10.87	AV	Vertic	PASS


Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level

Test Report

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 14:Transmit at 5210MHz by 802.11be(80MHz)	Voltage:	120Vac/60Hz
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	Part 15E		

Test Graph

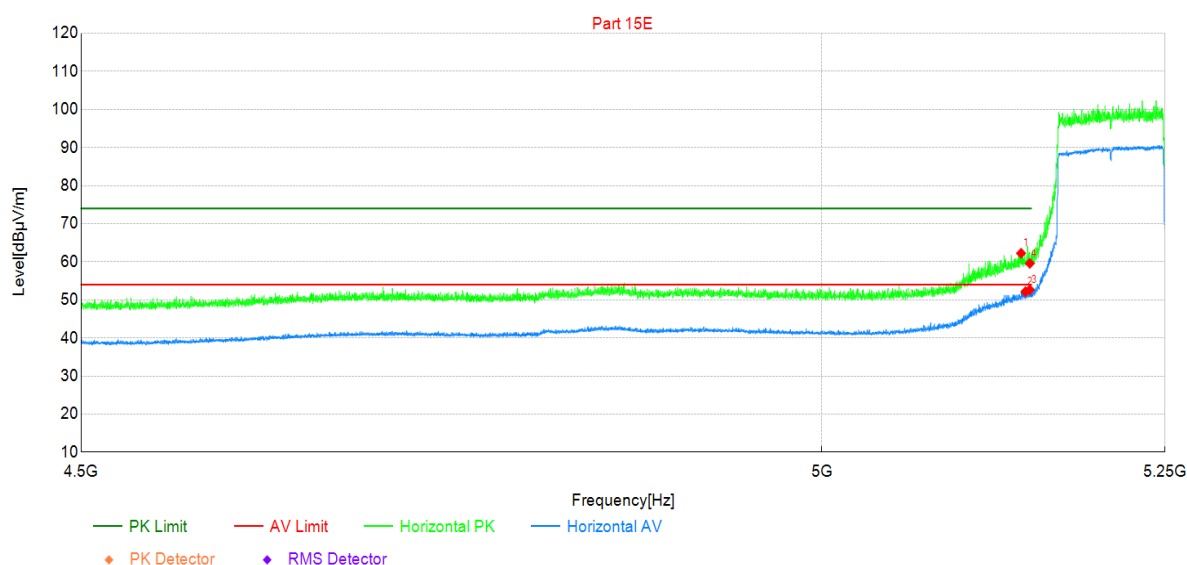

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5144	47.18	62.25	15.07	74.00	11.75	PK	Horizo	PASS
2	5147	37.06	52.15	15.09	54.00	1.85	AV	Horizo	PASS
3	5150	37.53	52.64	15.11	54.00	1.36	AV	Horizo	PASS
4	5150	44.47	59.58	15.11	74.00	14.42	PK	Horizo	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

Test Report

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 14:Transmit at 5210MHz by 802.11be(80MHz)	Voltage:	120Vac/60Hz
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	Part 15E		

Test Graph

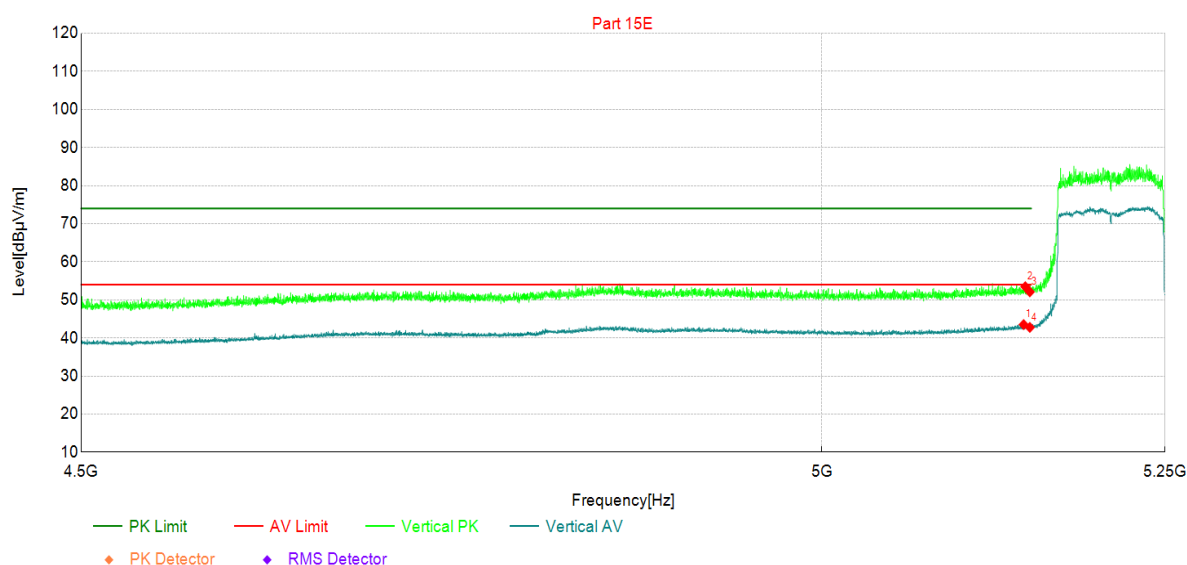

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5145	28.43	43.51	15.08	54.00	10.49	AV	Vertic	PASS
2	5147	38.37	53.46	15.09	74.00	20.54	PK	Vertic	PASS
3	5150	36.99	52.10	15.11	74.00	21.90	PK	Vertic	PASS
4	5150	27.66	42.77	15.11	54.00	11.23	AV	Vertic	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

Test Report

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 14:Transmit at 5290MHz by 802.11be(80MHz)	Voltage:	120Vac/60Hz
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	Part 15E		

Test Graph

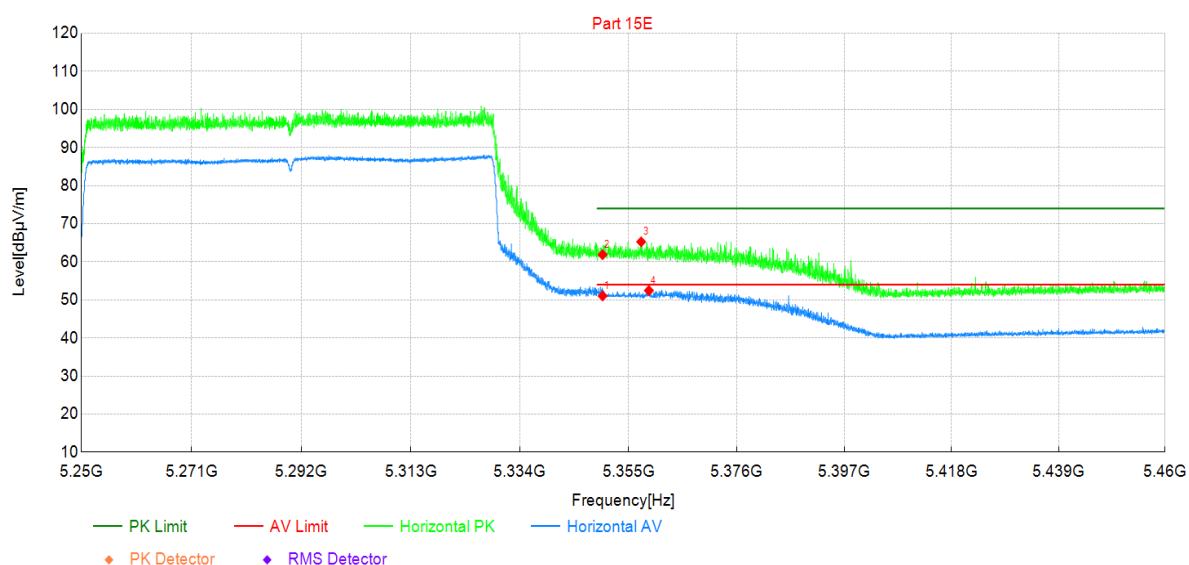


Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5350	35.33	51.04	15.71	54.00	2.96	AV	Horizo	PASS
2	5350	46.16	61.87	15.71	74.00	12.13	PK	Horizo	PASS
3	5357	49.55	65.25	15.70	74.00	8.75	PK	Horizo	PASS
4	5359	36.74	52.44	15.70	54.00	1.56	AV	Horizo	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Test Report

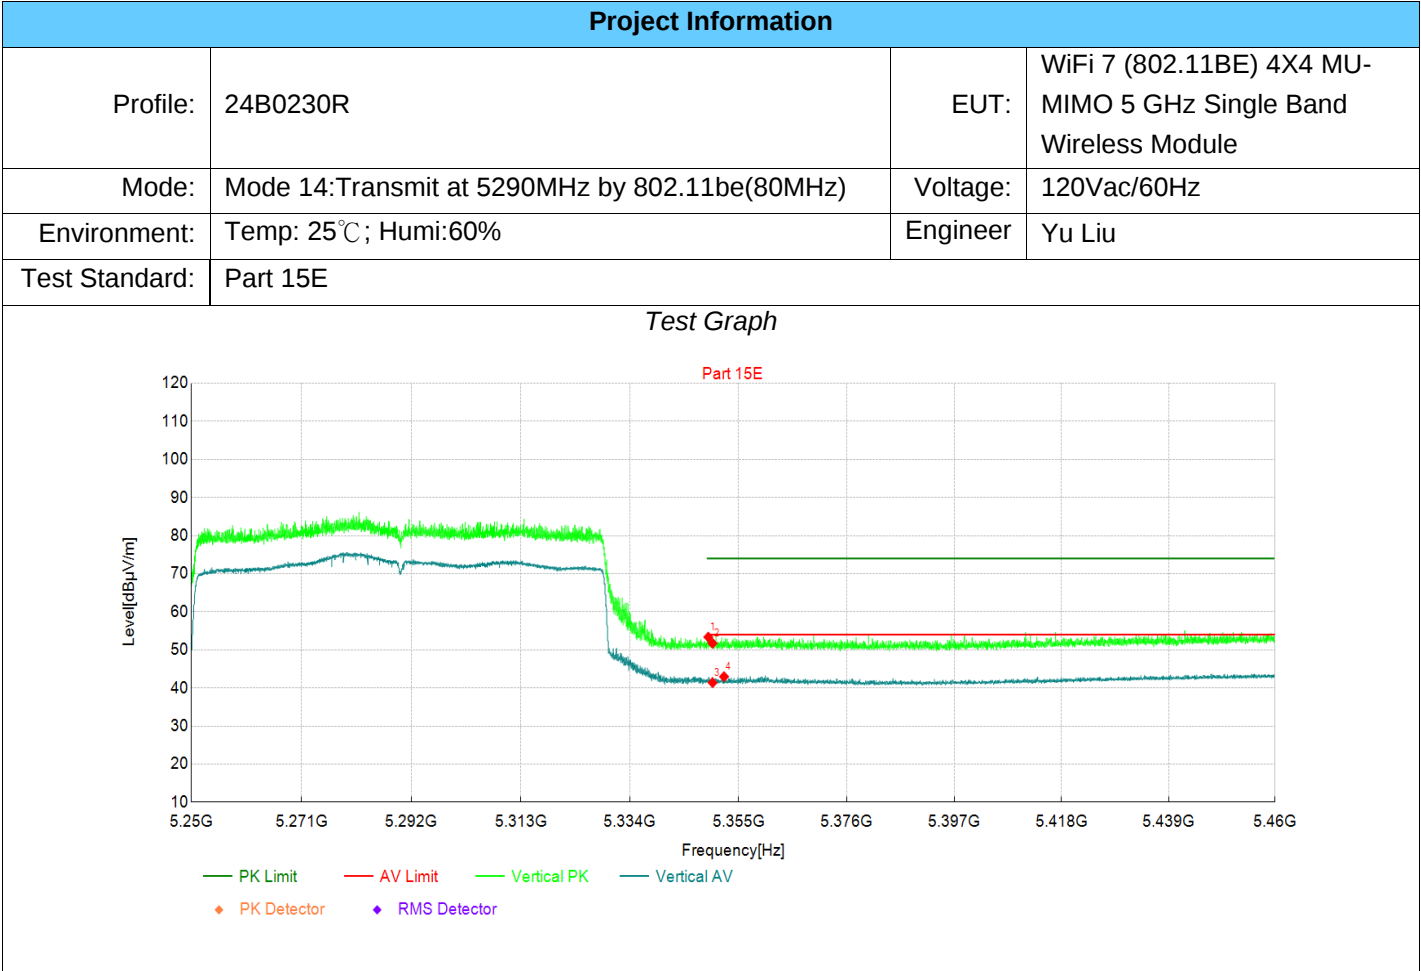

Suspected Data List									
NO	Frequency [MHz]	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Det	Pol	Verdict
1	5349	37.65	53.36	15.71	74.00	20.64	PK	Vertic	PASS
2	5350	35.99	51.70	15.71	74.00	22.30	PK	Vertic	PASS
3	5350	25.69	41.40	15.71	54.00	12.60	AV	Vertic	PASS
4	5352	27.25	42.96	15.71	54.00	11.04	AV	Vertic	PASS


Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level

Test Report

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 14:Transmit at 5530MHz by 802.11be(80MHz)	Voltage:	120Vac/60Hz
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	Part 15E		

Test Graph

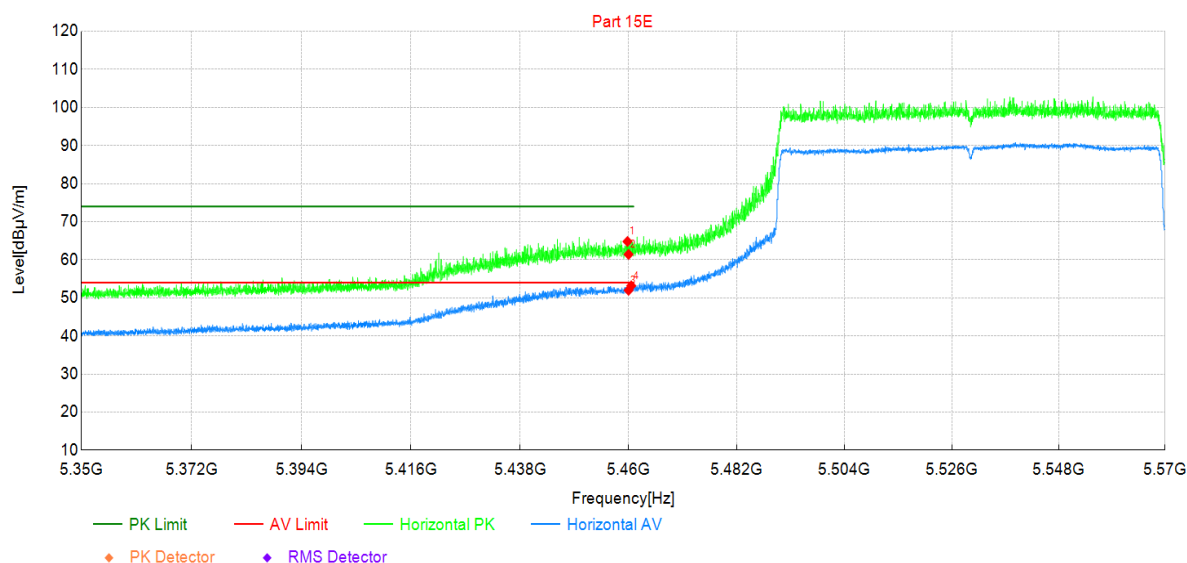


Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5460	48.46	64.80	16.34	74.00	9.20	PK	Horizo	PASS
2	5460	45.07	61.41	16.34	74.00	12.59	PK	Horizo	PASS
3	5460	35.64	51.98	16.34	54.00	2.02	AV	Horizo	PASS
4	5461	36.81	53.16	16.35	54.00	0.84	AV	Horizo	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Test Report

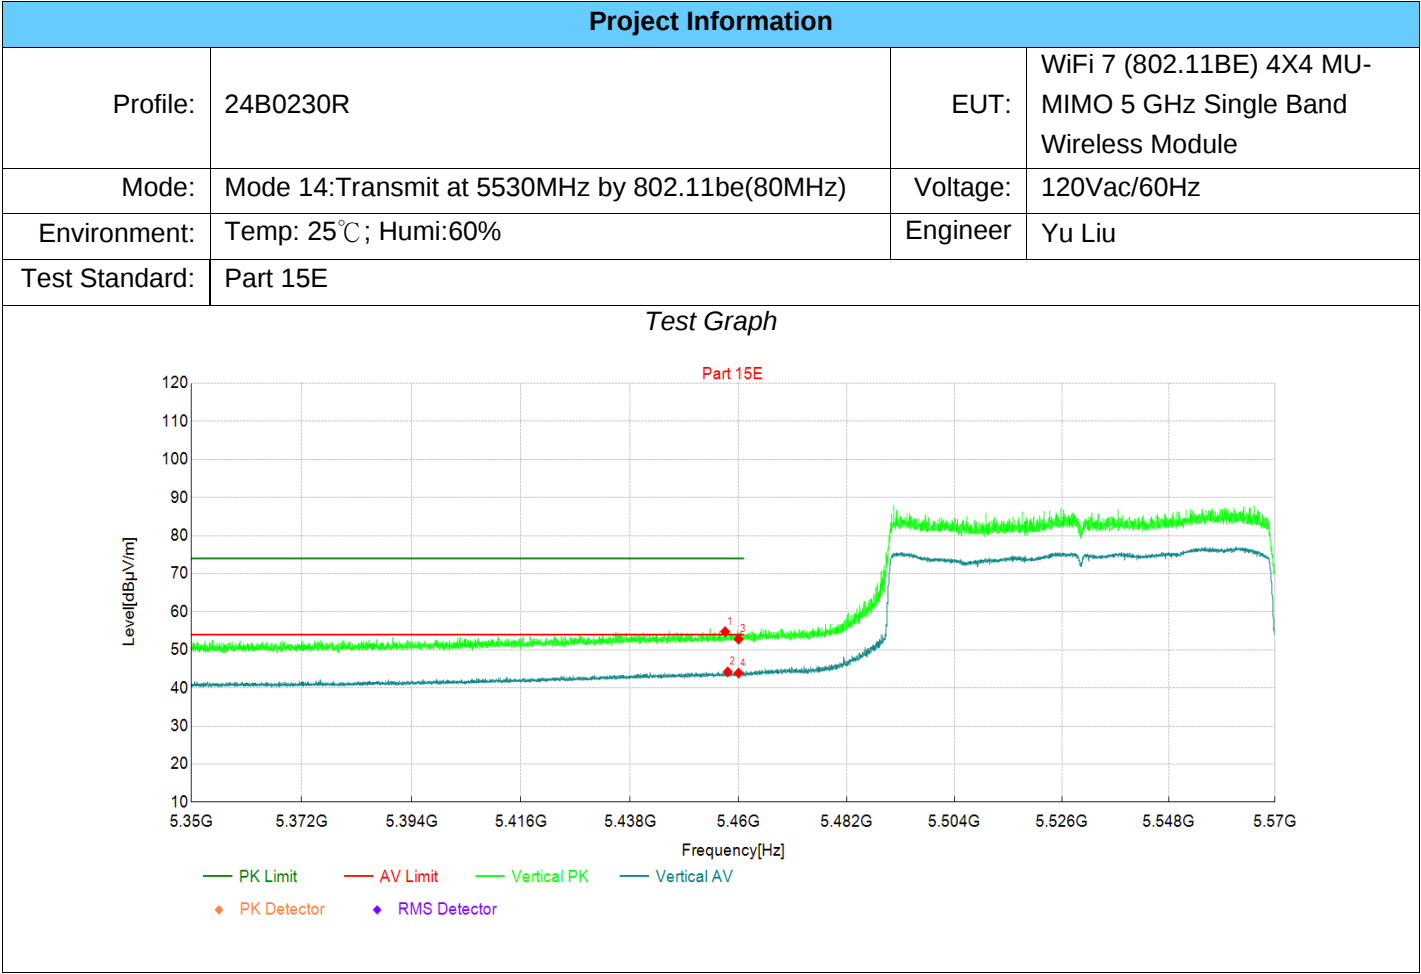

Suspected Data List									
NO	Frequency [MHz]	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Det	Pol	Verdict
1	5457	38.48	54.79	16.31	74.00	19.21	PK	Vertic	PASS
2	5458	27.90	44.21	16.31	54.00	9.79	AV	Vertic	PASS
3	5460	36.47	52.81	16.34	74.00	21.19	PK	Vertic	PASS
4	5460	27.57	43.91	16.34	54.00	10.09	AV	Vertic	PASS


Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level

Test Report

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 15:Transmit at 5250MHz by 802.11be(160MHz)	Voltage:	120Vac/60Hz
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	Part 15E		

Test Graph

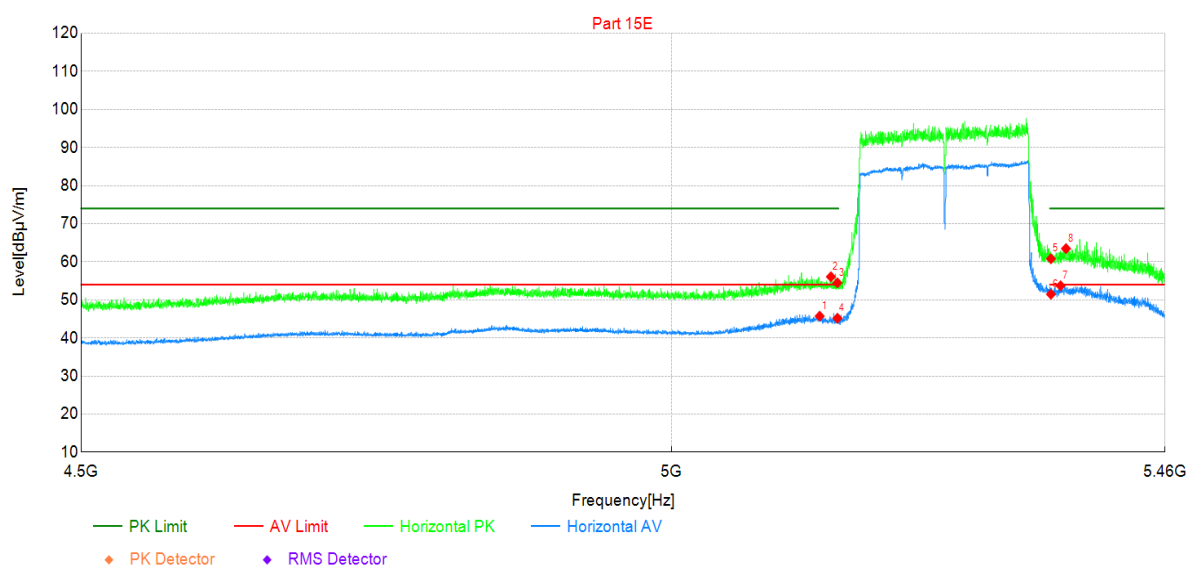


Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5134	30.70	45.72	15.02	54.00	8.28	AV	Horizo	PASS
2	5144	40.99	56.07	15.08	74.00	17.93	PK	Horizo	PASS
3	5150	39.36	54.47	15.11	74.00	19.53	PK	Horizo	PASS
4	5150	30.07	45.18	15.11	54.00	8.82	AV	Horizo	PASS
5	5350	45.09	60.80	15.71	74.00	13.20	PK	Horizo	PASS
6	5350	35.77	51.48	15.71	54.00	2.52	AV	Horizo	PASS
7	5359	38.01	53.71	15.70	54.00	0.29	AV	Horizo	PASS
8	5364	47.77	63.46	15.69	74.00	10.54	PK	Horizo	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level


Test Report

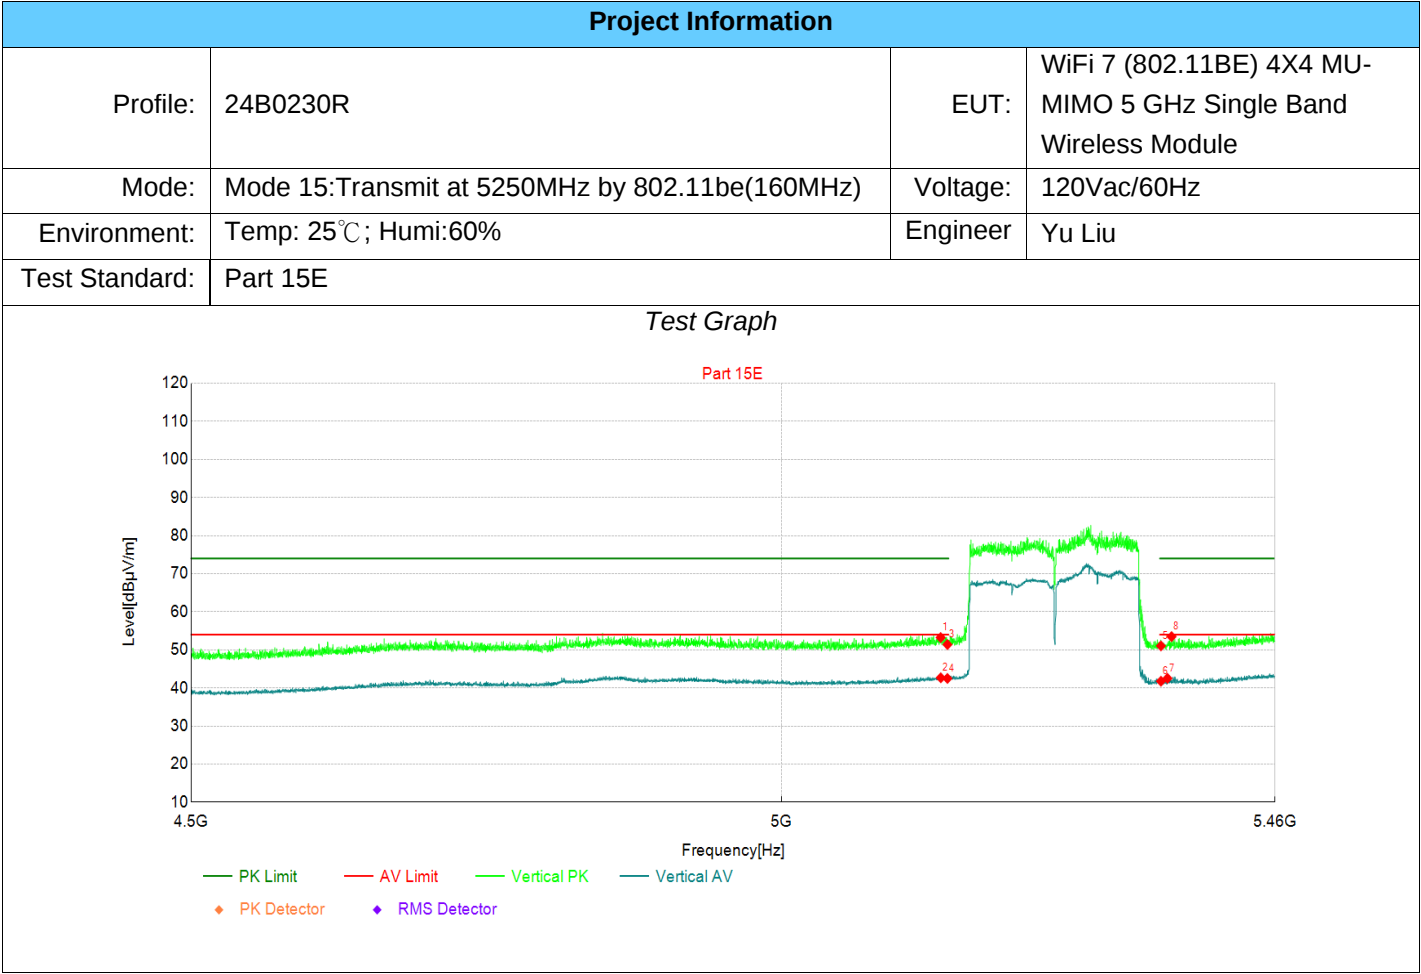

Suspected Data List									
NO	Frequency [MHz]	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Det	Pol	Verdict
1	5144	38.17	53.24	15.07	74.00	20.76	PK	Vertic	PASS
2	5144	27.60	42.67	15.07	54.00	11.33	AV	Vertic	PASS
3	5150	36.29	51.40	15.11	74.00	22.60	PK	Vertic	PASS
4	5150	27.38	42.49	15.11	54.00	11.51	AV	Vertic	PASS
5	5350	35.33	51.04	15.71	74.00	22.96	PK	Vertic	PASS
6	5350	26.06	41.77	15.71	54.00	12.23	AV	Vertic	PASS
7	5356	26.82	42.52	15.70	54.00	11.48	AV	Vertic	PASS
8	5360	37.78	53.48	15.70	74.00	20.52	PK	Vertic	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level

Test Report

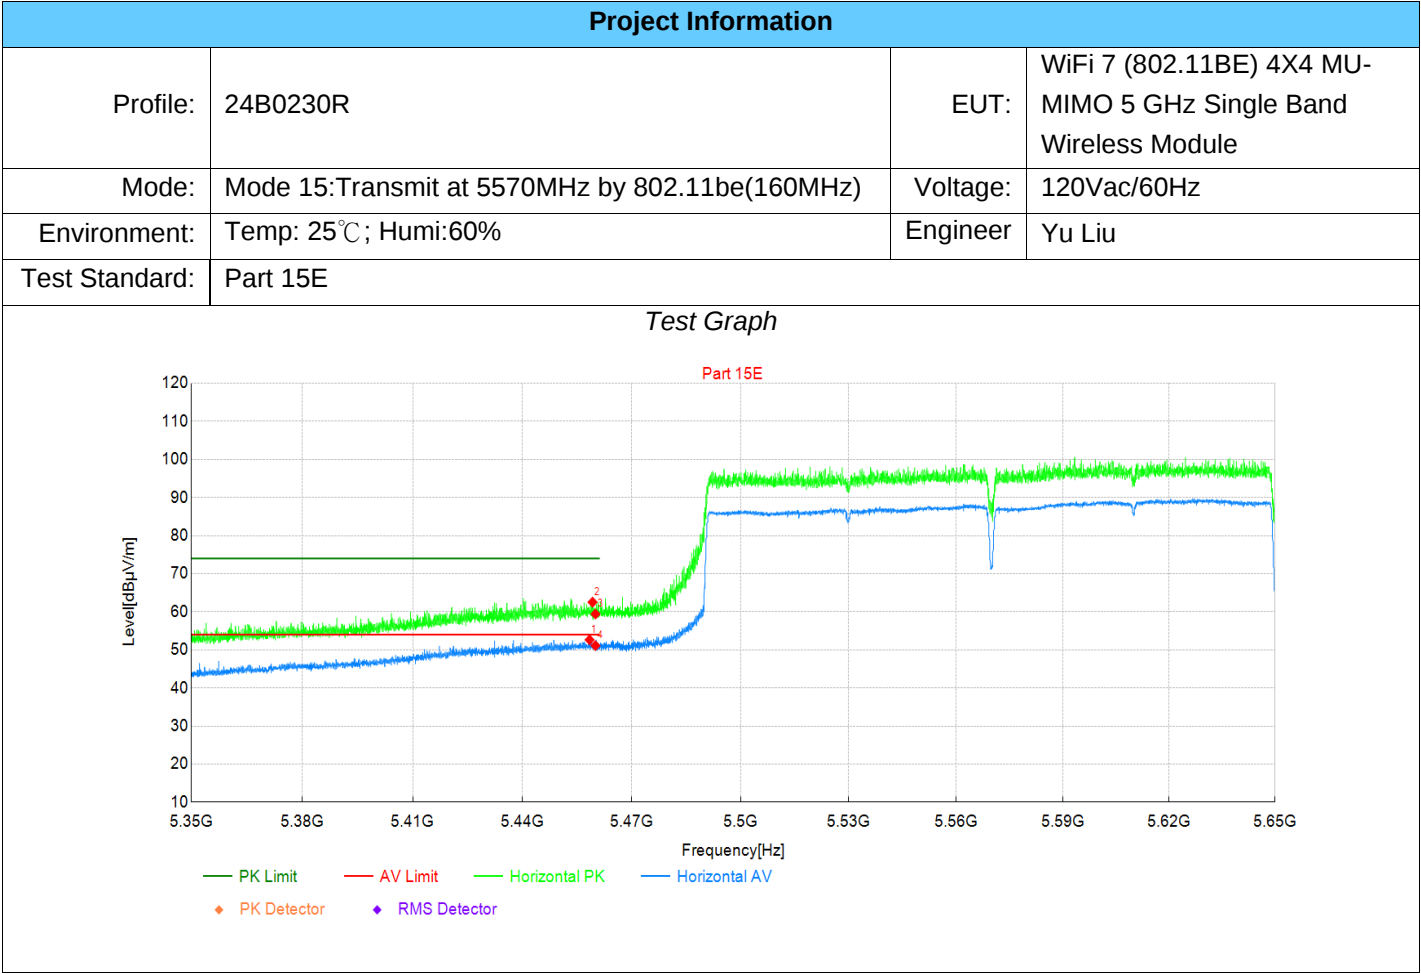

Suspected Data List									
NO	Frequency [MHz]	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Det	Pol	Verdict
1	5458	36.32	52.64	16.32	54.00	1.36	AV	Horizo	PASS
2	5459	46.20	62.53	16.33	74.00	11.47	PK	Horizo	PASS
3	5460	43.07	59.41	16.34	74.00	14.59	PK	Horizo	PASS
4	5460	34.78	51.12	16.34	54.00	2.88	AV	Horizo	PASS


Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level

Test Report

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 15:Transmit at 5570MHz by 802.11be(160MHz)	Voltage:	120Vac/60Hz
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	Part 15E		

Test Graph

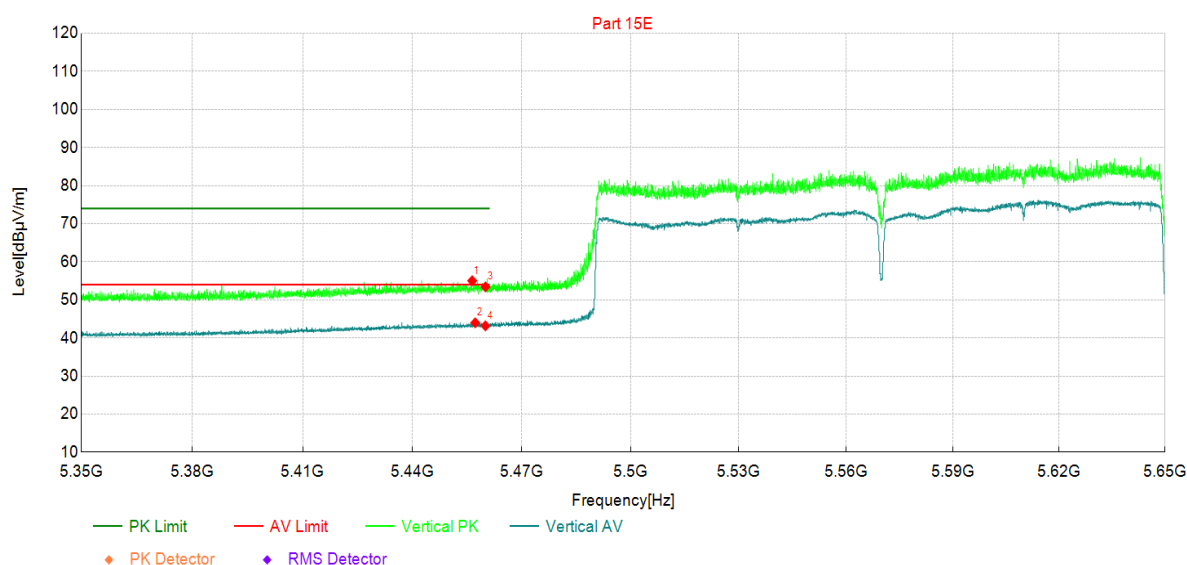

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5456	38.72	55.02	16.30	74.00	18.98	PK	Vertic	PASS
2	5457	27.66	43.97	16.31	54.00	10.03	AV	Vertic	PASS
3	5460	37.08	53.42	16.34	74.00	20.58	PK	Vertic	PASS
4	5460	26.84	43.18	16.34	54.00	10.82	AV	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 1:Transmit at 5745MHz by 802.11a(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC Part15E		

Test Graph

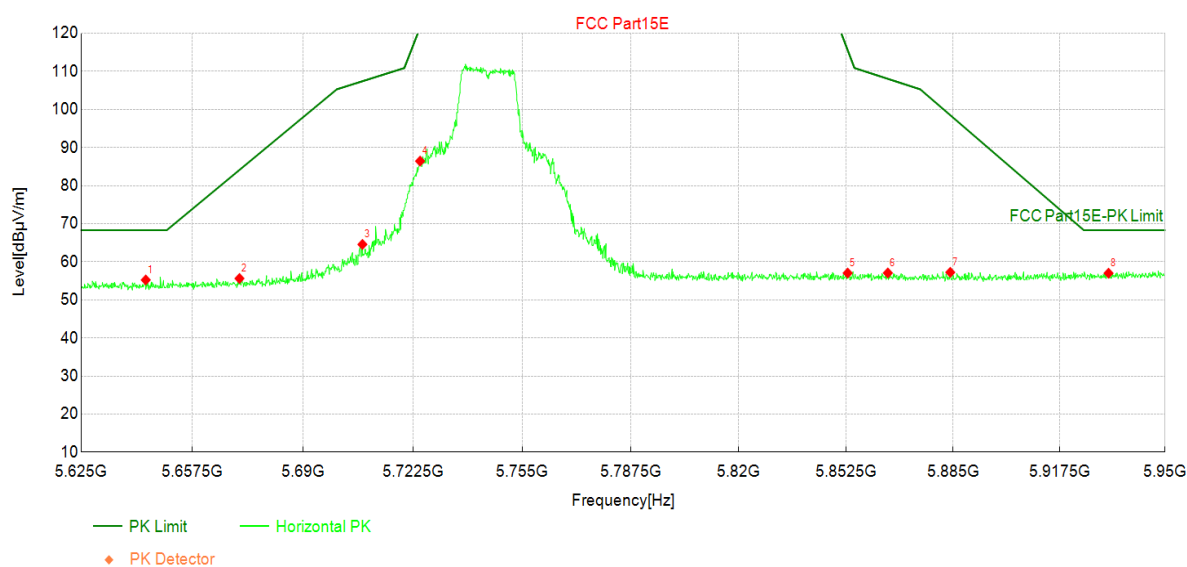

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5644	37.08	55.23	18.15	68.30	13.07	PK	Horizo	PASS
2	5671	37.20	55.62	18.42	84.13	28.51	PK	Horizo	PASS
3	5708	45.87	64.57	18.70	107.43	42.86	PK	Horizo	PASS
4	5725	67.78	86.45	18.67	121.53	35.08	PK	Horizo	PASS
5	5853	38.08	57.04	18.96	115.60	58.56	PK	Horizo	PASS
6	5865	38.01	57.07	19.06	108.06	50.99	PK	Horizo	PASS
7	5884	38.02	57.23	19.21	98.50	41.27	PK	Horizo	PASS
8	5933	37.43	57.01	19.58	68.30	11.29	PK	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 1:Transmit at 5745MHz by 802.11a(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC Part15E		

Test Graph

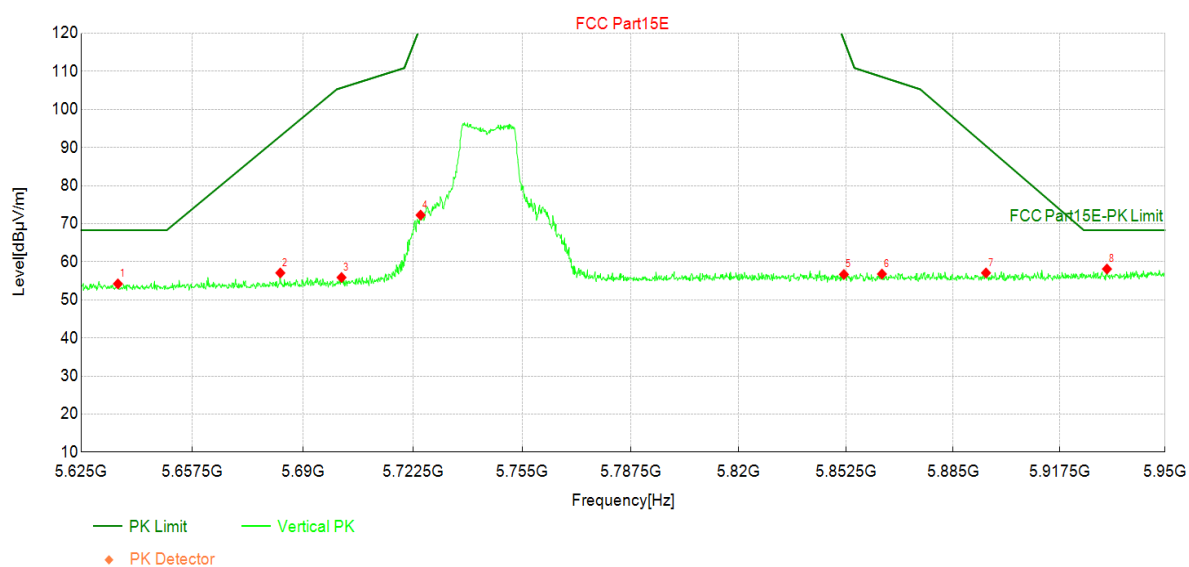

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5636	36.14	54.21	18.07	68.30	14.09	PK	Vertic	PASS
2	5683	38.53	57.07	18.54	93.03	35.96	PK	Vertic	PASS
3	5701	37.18	55.88	18.70	105.70	49.82	PK	Vertic	PASS
4	5725	53.60	72.27	18.67	121.90	49.63	PK	Vertic	PASS
5	5852	37.72	56.68	18.96	118.19	61.51	PK	Vertic	PASS
6	5863	37.74	56.79	19.05	108.56	51.77	PK	Vertic	PASS
7	5895	37.78	57.08	19.30	90.43	33.35	PK	Vertic	PASS
8	5932	38.52	58.10	19.58	68.30	10.20	PK	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 1:Transmit at 5785MHz by 802.11a(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC Part15E		

Test Graph

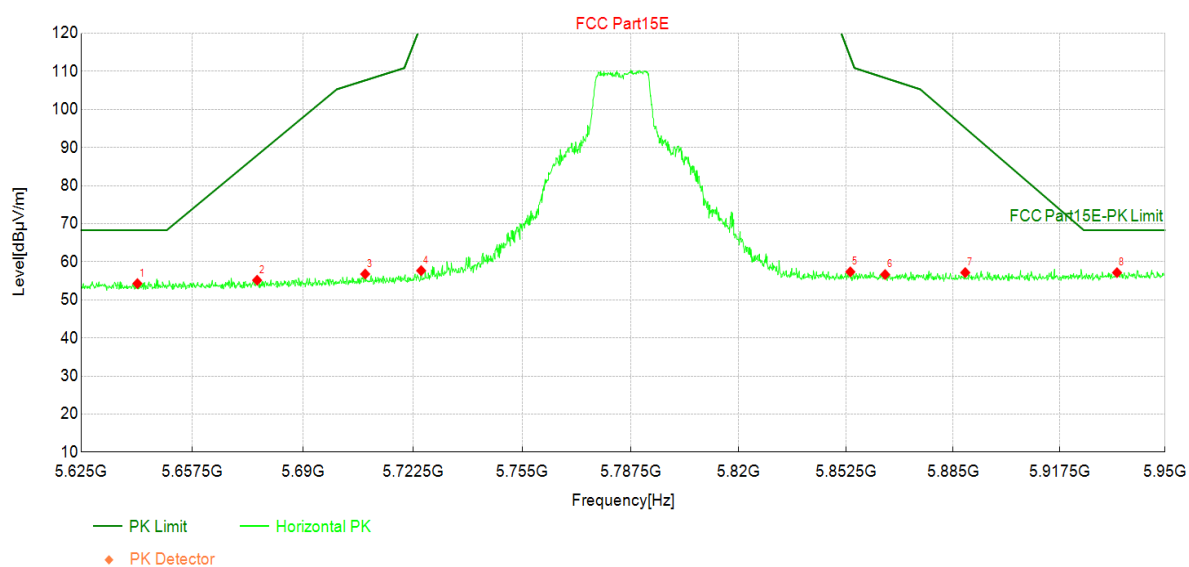

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5641	36.15	54.28	18.13	68.30	14.02	PK	Horizo	PASS
2	5677	36.68	55.16	18.48	87.98	32.82	PK	Horizo	PASS
3	5708	38.08	56.78	18.70	107.66	50.88	PK	Horizo	PASS
4	5725	39.00	57.67	18.67	122.27	64.60	PK	Horizo	PASS
5	5854	38.39	57.36	18.97	113.74	56.38	PK	Horizo	PASS
6	5864	37.60	56.66	19.06	108.29	51.63	PK	Horizo	PASS
7	5889	37.91	57.16	19.25	95.13	37.97	PK	Horizo	PASS
8	5935	37.54	57.15	19.61	68.30	11.15	PK	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 1:Transmit at 5785MHz by 802.11a(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC Part15E		

Test Graph

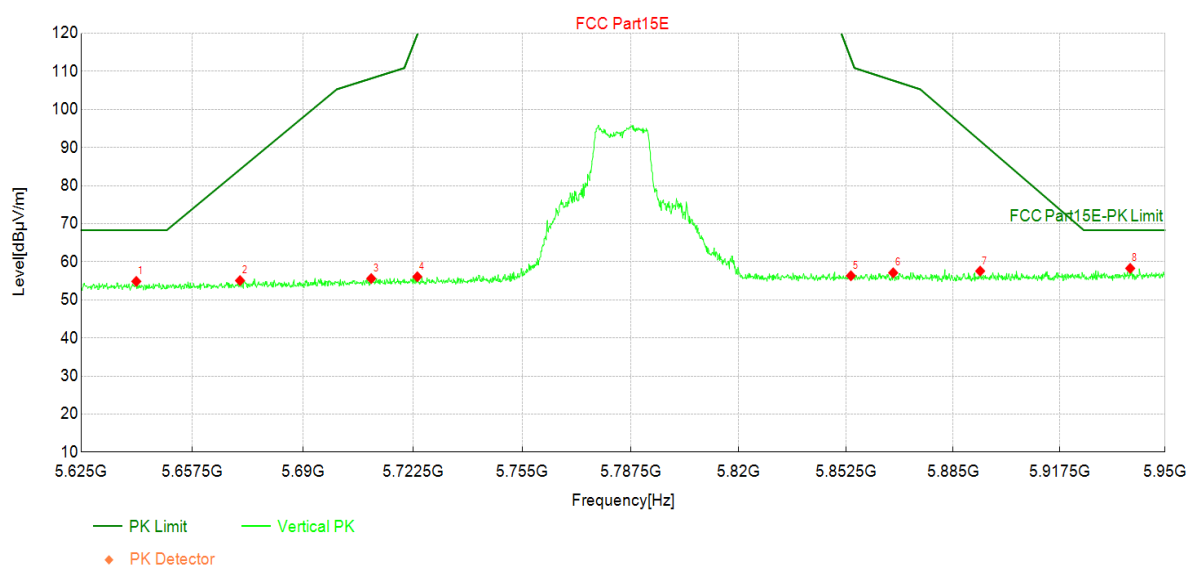

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5641	36.72	54.84	18.12	68.30	13.46	PK	Vertic	PASS
2	5671	36.64	55.06	18.42	84.25	29.19	PK	Vertic	PASS
3	5710	36.90	55.59	18.69	108.16	52.57	PK	Vertic	PASS
4	5724	37.42	56.08	18.66	119.68	63.60	PK	Vertic	PASS
5	5854	37.36	56.33	18.97	113.37	57.04	PK	Vertic	PASS
6	5867	38.04	57.11	19.07	107.61	50.50	PK	Vertic	PASS
7	5893	38.28	57.56	19.28	91.75	34.19	PK	Vertic	PASS
8	5939	38.64	58.28	19.64	68.30	10.02	PK	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 1:Transmit at 5825MHz by 802.11a(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC Part15E		

Test Graph

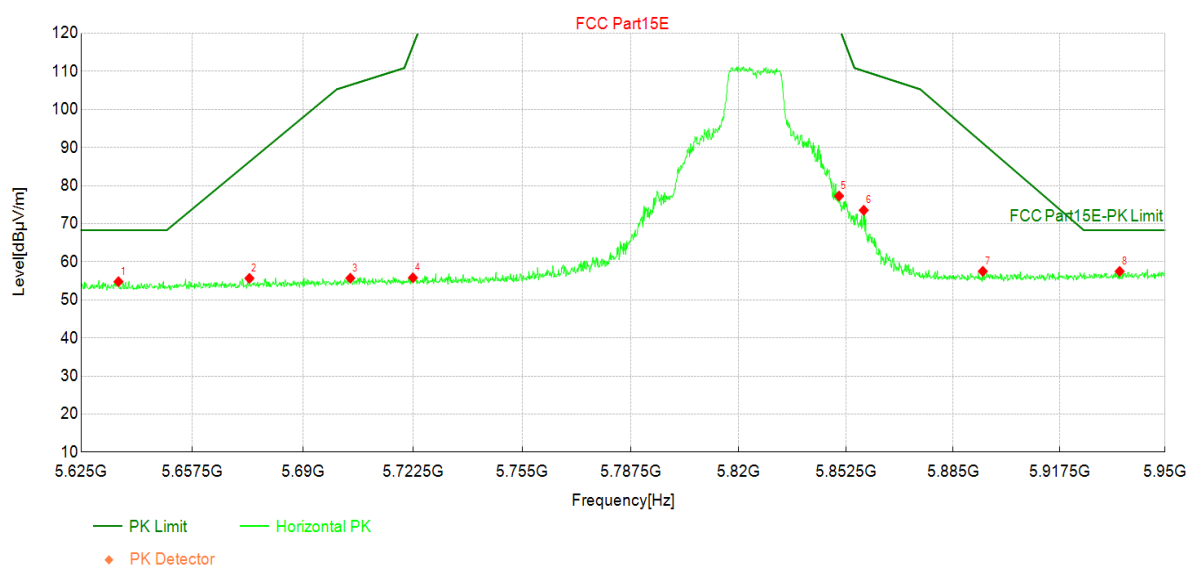

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5636	36.71	54.78	18.07	68.30	13.52	PK	Horizo	PASS
2	5674	37.20	55.65	18.45	86.29	30.64	PK	Horizo	PASS
3	5704	37.00	55.70	18.70	106.43	50.73	PK	Horizo	PASS
4	5723	37.13	55.80	18.67	116.71	60.91	PK	Horizo	PASS
5	5850	58.33	77.28	18.95	121.53	44.25	PK	Horizo	PASS
6	5858	54.53	73.53	19.00	110.11	36.58	PK	Horizo	PASS
7	5894	38.21	57.51	19.30	91.15	33.64	PK	Horizo	PASS
8	5936	37.87	57.48	19.61	68.30	10.82	PK	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 1:Transmit at 5825MHz by 802.11a(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC Part15E		

Test Graph

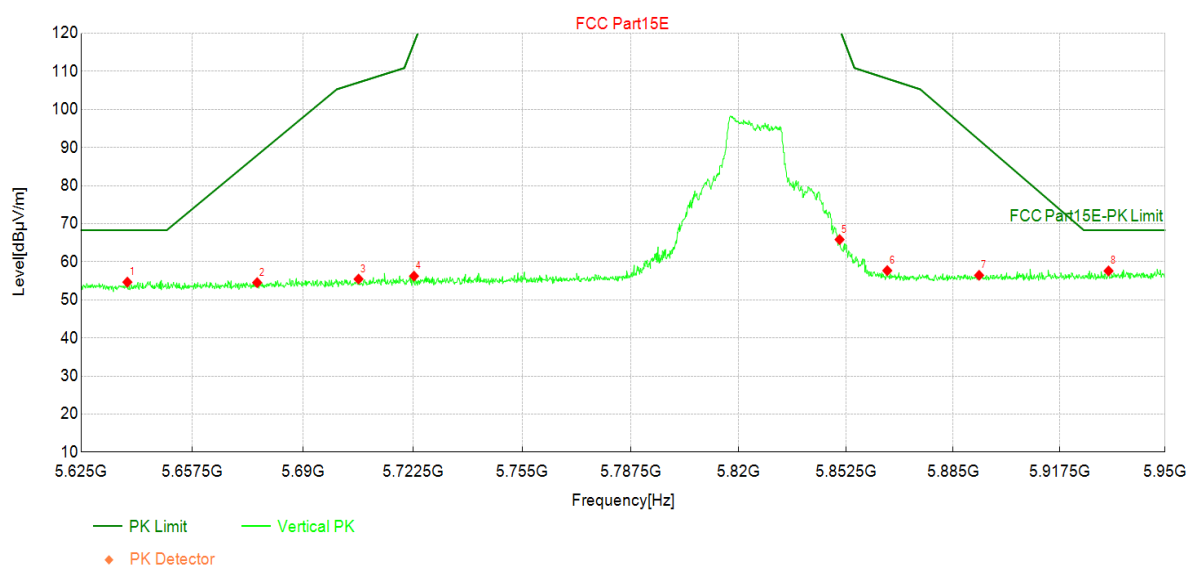

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5638	36.56	54.66	18.10	68.30	13.64	PK	Vertic	PASS
2	5677	36.05	54.53	18.48	87.98	33.45	PK	Vertic	PASS
3	5706	36.77	55.46	18.69	107.11	51.65	PK	Vertic	PASS
4	5723	37.58	56.25	18.67	117.45	61.20	PK	Vertic	PASS
5	5851	46.89	65.84	18.95	121.16	55.32	PK	Vertic	PASS
6	5865	38.62	57.68	19.06	108.11	50.43	PK	Vertic	PASS
7	5893	37.17	56.45	19.28	91.99	35.54	PK	Vertic	PASS
8	5933	38.02	57.60	19.58	68.30	10.70	PK	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 2:Transmit at 5745MHz by 802.11n(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC Part15E		

Test Graph

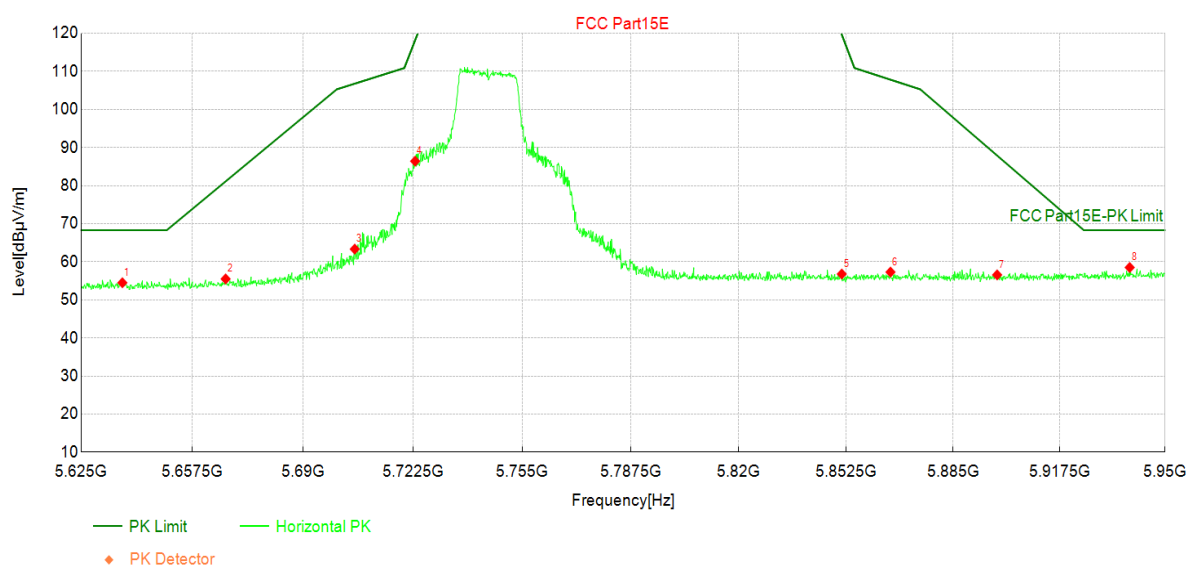

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5637	36.41	54.50	18.09	68.30	13.80	PK	Horizo	PASS
2	5667	37.12	55.50	18.38	81.12	25.62	PK	Horizo	PASS
3	5705	44.64	63.34	18.70	106.79	43.45	PK	Horizo	PASS
4	5723	67.77	86.44	18.67	118.20	31.76	PK	Horizo	PASS
5	5851	37.84	56.79	18.95	119.68	62.89	PK	Horizo	PASS
6	5866	38.23	57.30	19.07	107.83	50.53	PK	Horizo	PASS
7	5898	37.23	56.56	19.33	87.90	31.34	PK	Horizo	PASS
8	5939	38.87	58.51	19.64	68.30	9.79	PK	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 2:Transmit at 5745MHz by 802.11n(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC Part15E		

Test Graph

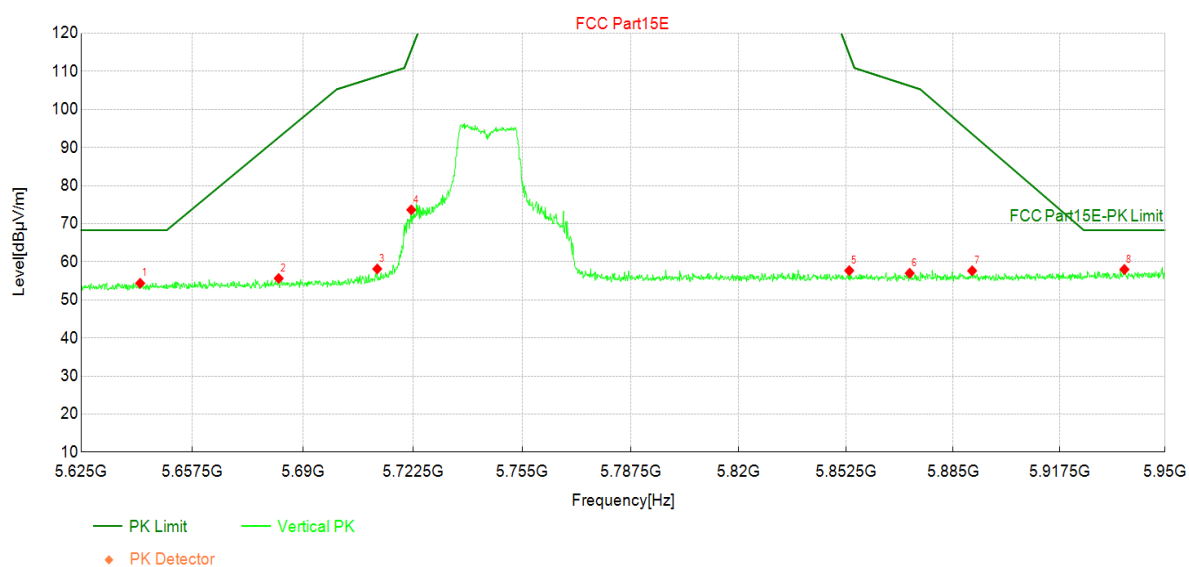

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5642	36.22	54.36	18.14	68.30	13.94	PK	Vertic	PASS
2	5683	37.09	55.63	18.54	92.67	37.04	PK	Vertic	PASS
3	5712	39.43	58.12	18.69	108.66	50.54	PK	Vertic	PASS
4	5722	54.98	73.65	18.67	115.60	41.95	PK	Vertic	PASS
5	5853	38.72	57.68	18.96	114.49	56.81	PK	Vertic	PASS
6	5872	37.88	57.00	19.12	106.20	49.20	PK	Vertic	PASS
7	5891	38.36	57.63	19.27	93.56	35.93	PK	Vertic	PASS
8	5937	38.36	57.99	19.63	68.30	10.31	PK	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 2:Transmit at 5785MHz by 802.11n(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC Part15E		

Test Graph

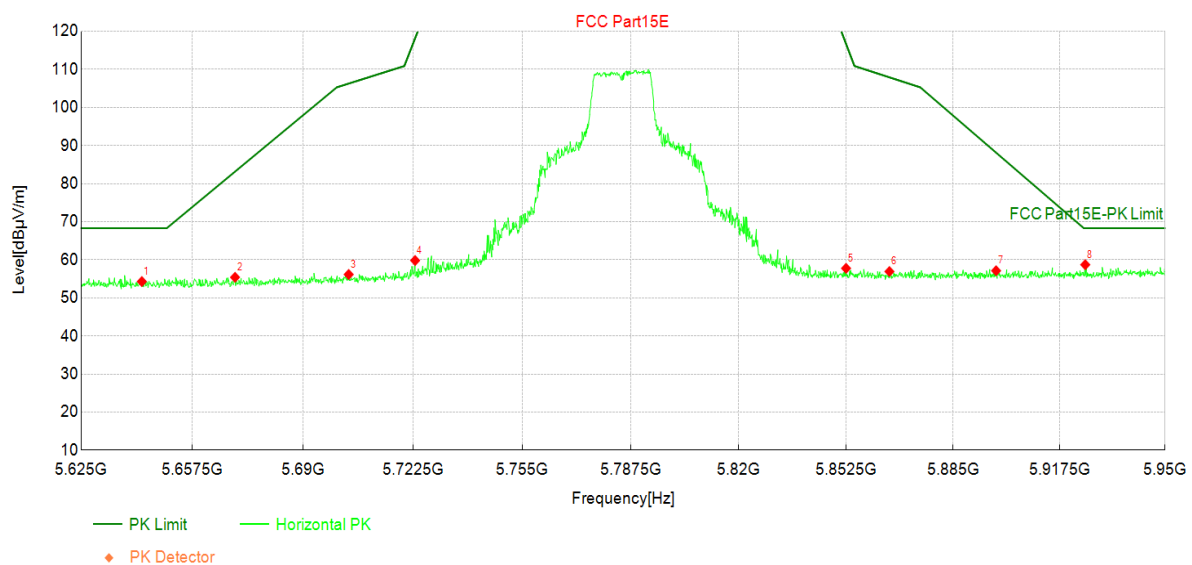

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5643	36.15	54.29	18.14	68.30	14.01	PK	Horizo	PASS
2	5670	36.99	55.40	18.41	83.17	27.77	PK	Horizo	PASS
3	5704	37.44	56.15	18.71	106.29	50.14	PK	Horizo	PASS
4	5723	41.15	59.82	18.67	118.20	58.38	PK	Horizo	PASS
5	5852	38.80	57.76	18.96	116.71	58.95	PK	Horizo	PASS
6	5866	37.86	56.92	19.06	107.92	51.00	PK	Horizo	PASS
7	5898	37.80	57.13	19.33	88.14	31.01	PK	Horizo	PASS
8	5925	39.18	58.71	19.53	68.30	9.59	PK	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 2:Transmit at 5785MHz by 802.11n(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC Part15E		

Test Graph

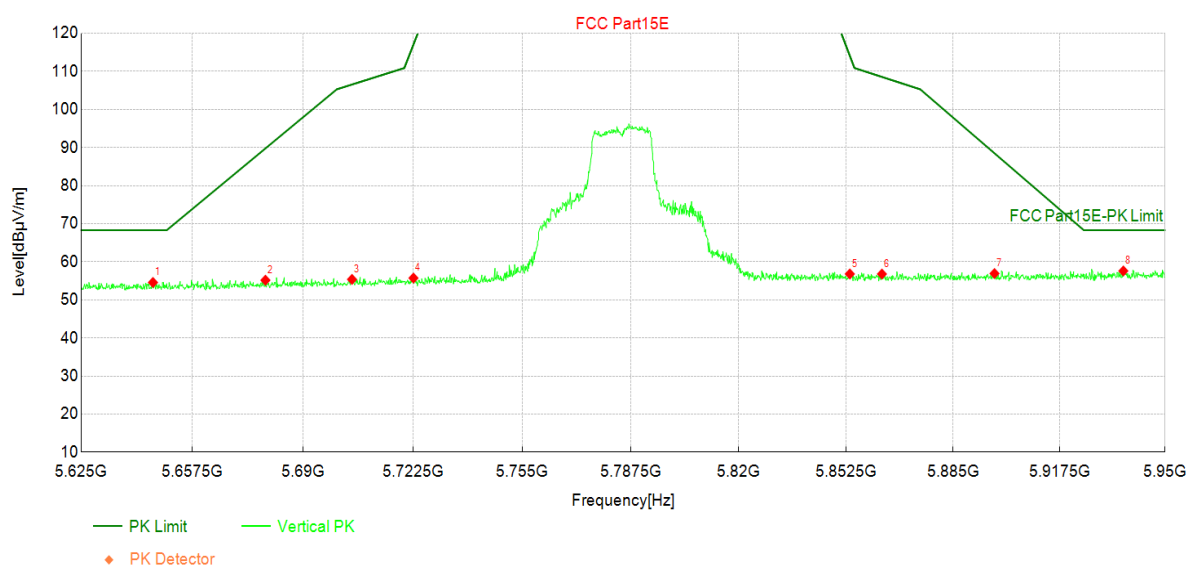

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5646	36.40	54.57	18.17	68.30	13.73	PK	Vertic	PASS
2	5679	36.66	55.16	18.50	89.78	34.62	PK	Vertic	PASS
3	5705	36.68	55.38	18.70	106.56	51.18	PK	Vertic	PASS
4	5723	37.06	55.73	18.67	117.08	61.35	PK	Vertic	PASS
5	5854	37.84	56.81	18.97	114.12	57.31	PK	Vertic	PASS
6	5863	37.74	56.79	19.05	108.56	51.77	PK	Vertic	PASS
7	5898	37.60	56.92	19.32	88.50	31.58	PK	Vertic	PASS
8	5937	37.96	57.59	19.63	68.30	10.71	PK	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 2:Transmit at 5825MHz by 802.11n(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC Part15E		

Test Graph

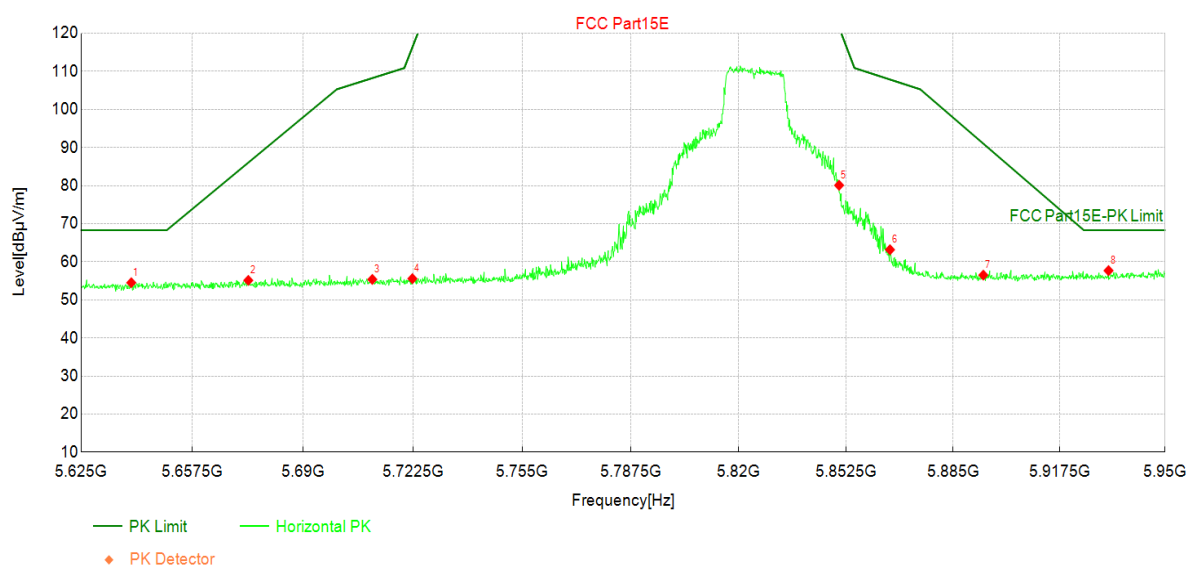

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5640	36.40	54.51	18.11	68.30	13.79	PK	Horizo	PASS
2	5674	36.67	55.12	18.45	86.05	30.93	PK	Horizo	PASS
3	5711	36.68	55.37	18.69	108.25	52.88	PK	Horizo	PASS
4	5722	36.90	55.57	18.67	116.34	60.77	PK	Horizo	PASS
5	5850	61.15	80.10	18.95	121.53	41.43	PK	Horizo	PASS
6	5866	44.11	63.17	19.06	107.88	44.71	PK	Horizo	PASS
7	5894	37.21	56.51	19.30	91.03	34.52	PK	Horizo	PASS
8	5933	38.11	57.69	19.58	68.30	10.61	PK	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 2:Transmit at 5825MHz by 802.11n(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC Part15E		

Test Graph

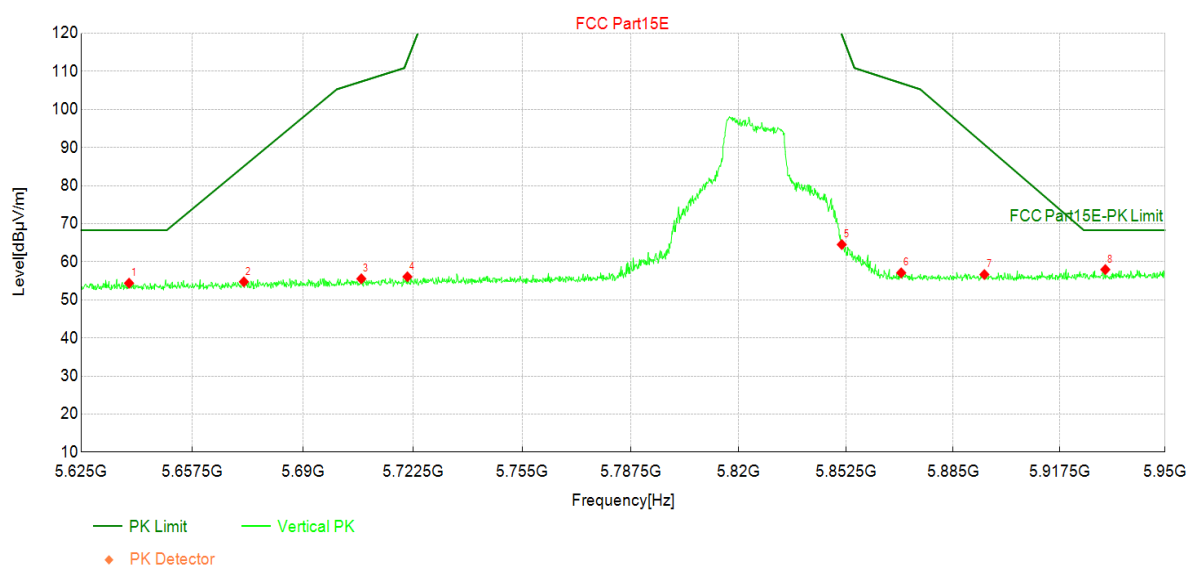

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5639	36.28	54.38	18.10	68.30	13.92	PK	Vertic	PASS
2	5673	36.30	54.74	18.44	85.09	30.35	PK	Vertic	PASS
3	5707	36.84	55.54	18.70	107.34	51.80	PK	Vertic	PASS
4	5721	37.38	56.06	18.68	113.01	56.95	PK	Vertic	PASS
5	5851	45.58	64.53	18.95	119.68	55.15	PK	Vertic	PASS
6	5869	38.01	57.10	19.09	106.92	49.82	PK	Vertic	PASS
7	5895	37.36	56.66	19.30	90.79	34.13	PK	Vertic	PASS
8	5932	38.38	57.96	19.58	68.30	10.34	PK	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 3:Transmit at 5755MHz by 802.11n(40MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC Part15E		

Test Graph

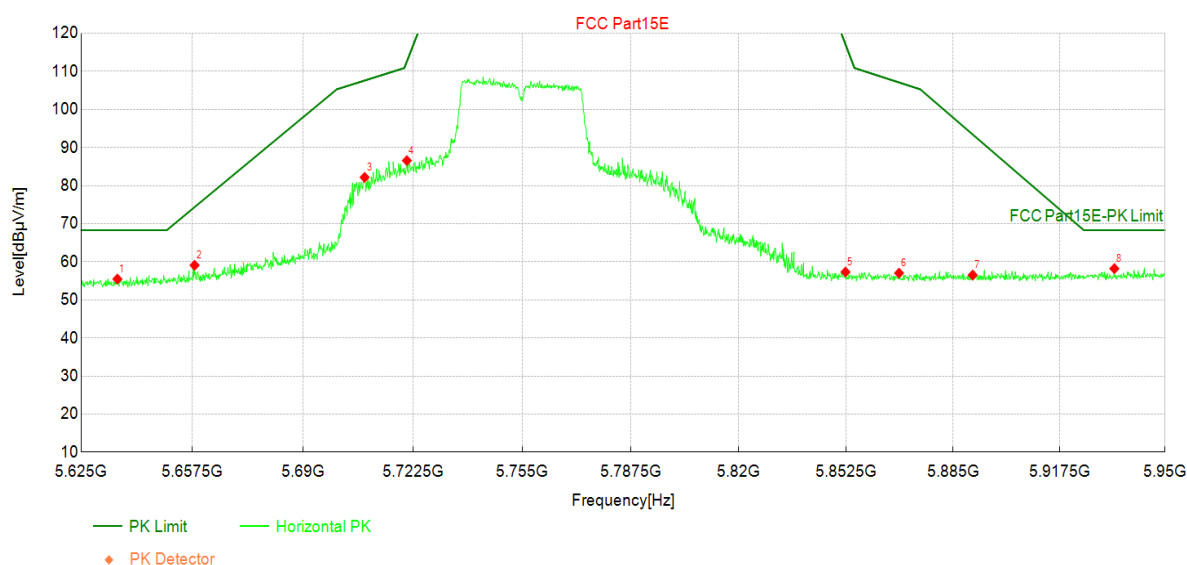

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5636	37.41	55.47	18.06	68.30	12.83	PK	Horizo	PASS
2	5658	40.79	59.08	18.29	74.37	15.29	PK	Horizo	PASS
3	5708	63.48	82.18	18.70	107.61	25.43	PK	Horizo	PASS
4	5721	67.91	86.59	18.68	112.63	26.04	PK	Horizo	PASS
5	5852	38.36	57.32	18.96	117.08	59.76	PK	Horizo	PASS
6	5869	37.93	57.02	19.09	107.10	50.08	PK	Horizo	PASS
7	5891	37.23	56.50	19.27	93.44	36.94	PK	Horizo	PASS
8	5934	38.61	58.21	19.60	68.30	10.09	PK	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 3:Transmit at 5755MHz by 802.11n(40MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC Part15E		

Test Graph

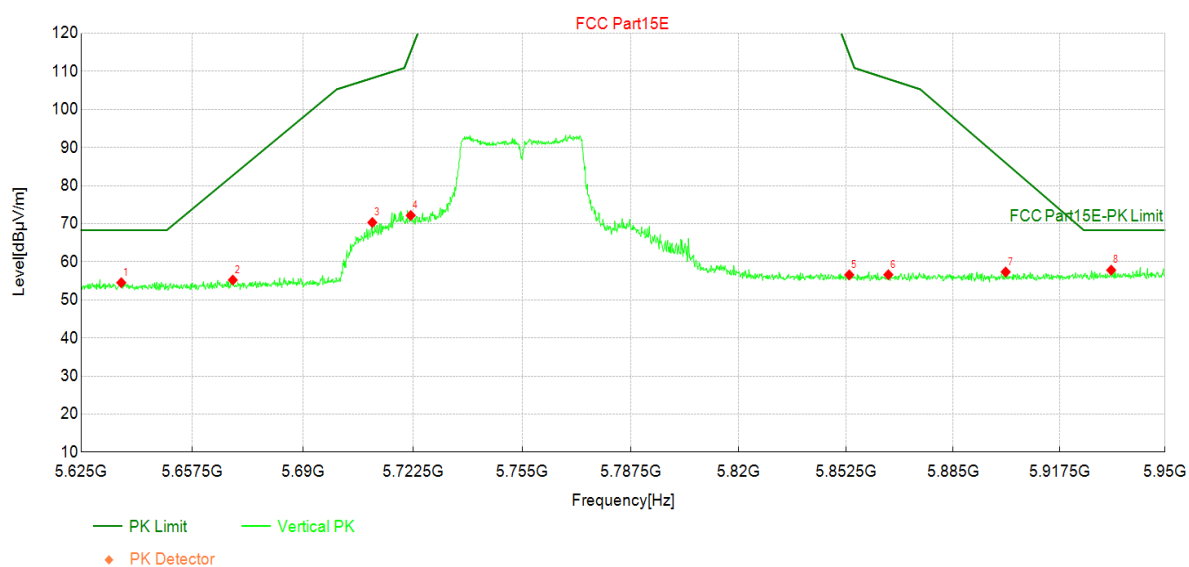

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5637	36.44	54.51	18.07	68.30	13.79	PK	Vertic	PASS
2	5669	36.81	55.21	18.40	82.68	27.47	PK	Vertic	PASS
3	5711	51.64	70.33	18.69	108.25	37.92	PK	Vertic	PASS
4	5722	53.50	72.17	18.67	115.23	43.06	PK	Vertic	PASS
5	5853	37.60	56.56	18.96	114.49	57.93	PK	Vertic	PASS
6	5865	37.55	56.61	19.06	108.01	51.40	PK	Vertic	PASS
7	5901	37.98	57.33	19.35	85.97	28.64	PK	Vertic	PASS
8	5933	38.21	57.81	19.60	68.30	10.49	PK	Vertic	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level