


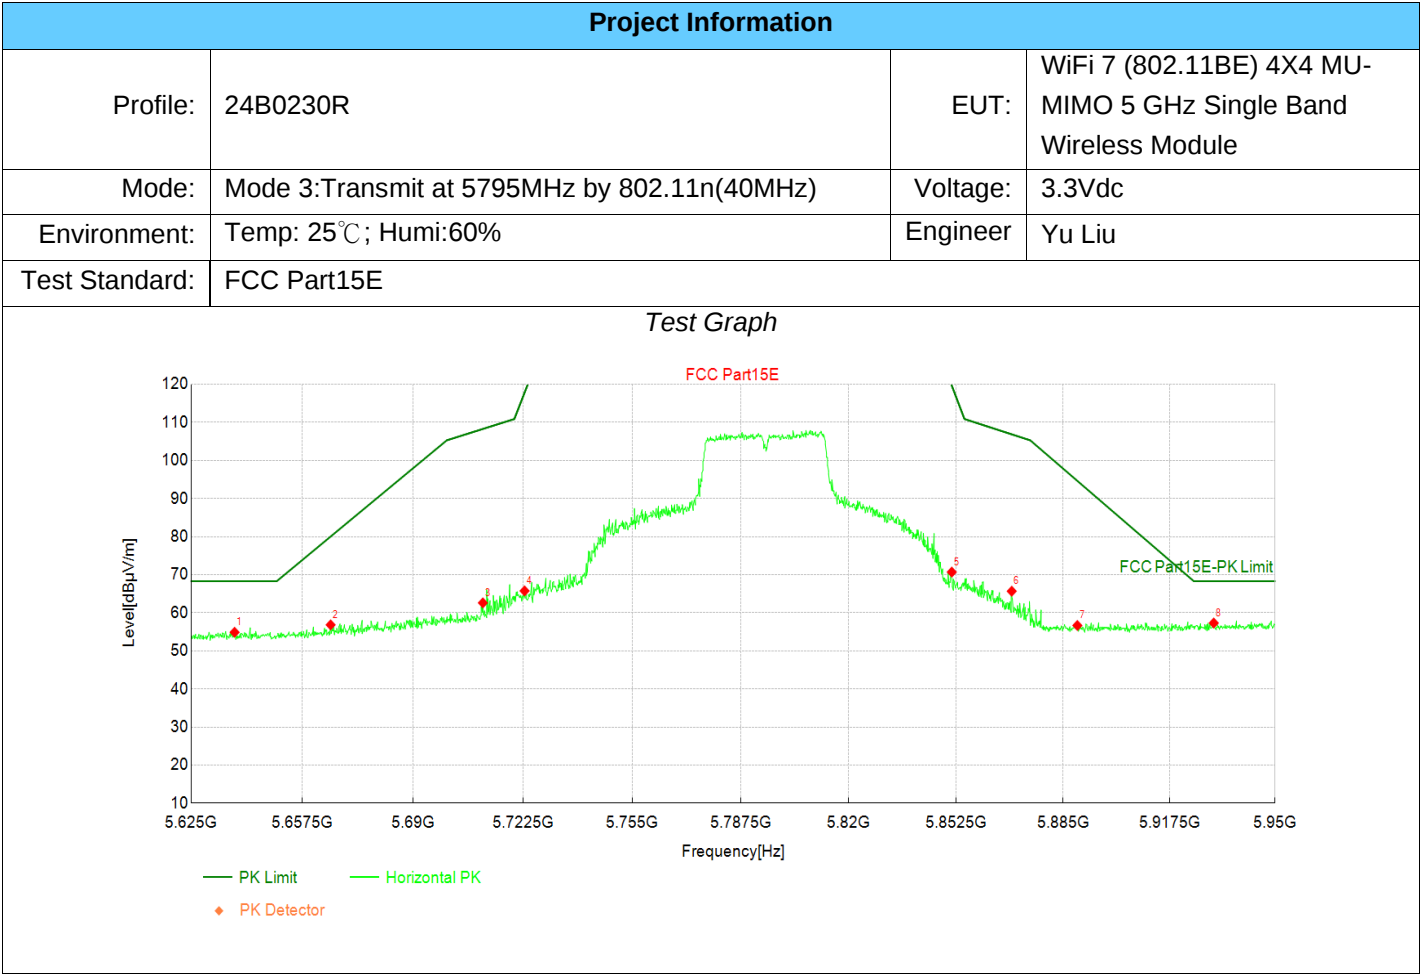


Suspected Data List									
NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5638	36.79	54.88	18.09	68.30	13.42	PK	Horizo	PASS
2	5666	38.46	56.83	18.37	80.03	23.20	PK	Horizo	PASS
3	5711	43.91	62.60	18.69	108.29	45.69	PK	Horizo	PASS
4	5723	47.09	65.76	18.67	117.82	52.06	PK	Horizo	PASS
5	5851	51.75	70.70	18.95	119.68	48.98	PK	Horizo	PASS
6	5869	46.57	65.67	19.10	106.88	41.21	PK	Horizo	PASS
7	5889	37.41	56.67	19.26	94.64	37.97	PK	Horizo	PASS
8	5931	37.73	57.31	19.58	68.30	10.99	PK	Horizo	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 3:Transmit at 5795MHz by 802.11n(40MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC Part15E		

Test Graph

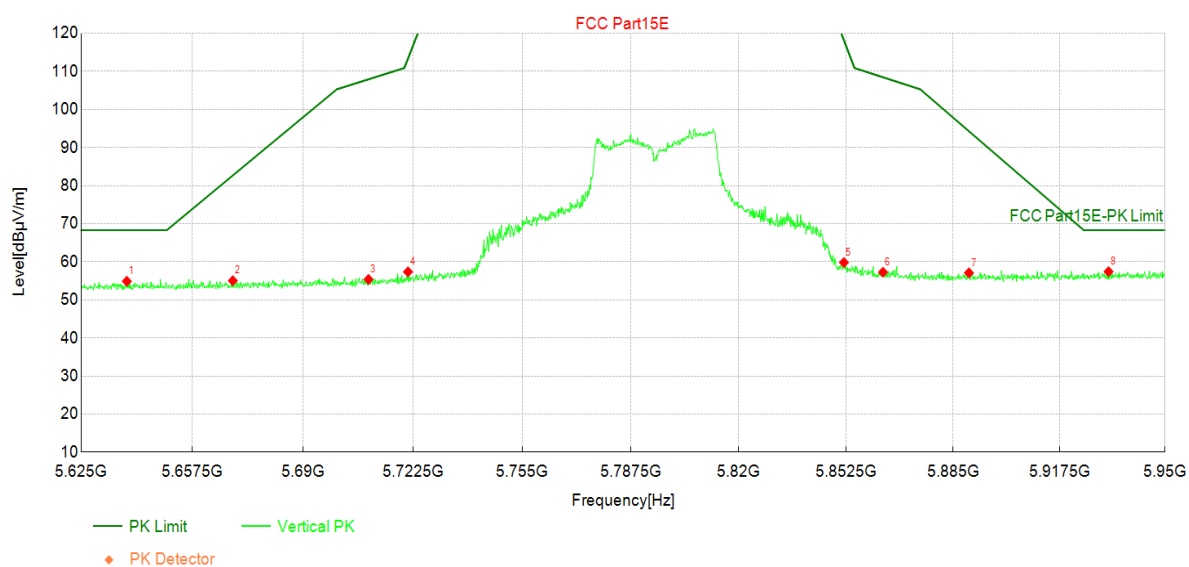

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5638	36.78	54.88	18.10	68.30	13.42	PK	Vertic	PASS
2	5669	36.63	55.03	18.40	82.68	27.65	PK	Vertic	PASS
3	5709	36.68	55.37	18.69	107.93	52.56	PK	Vertic	PASS
4	5721	38.68	57.36	18.68	113.38	56.02	PK	Vertic	PASS
5	5852	40.86	59.82	18.96	118.19	58.37	PK	Vertic	PASS
6	5864	38.22	57.27	19.05	108.47	51.20	PK	Vertic	PASS
7	5890	37.82	57.08	19.26	94.28	37.20	PK	Vertic	PASS
8	5933	37.83	57.41	19.58	68.30	10.89	PK	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 4:Transmit at 5745MHz by 802.11ac(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC Part15E		

Test Graph

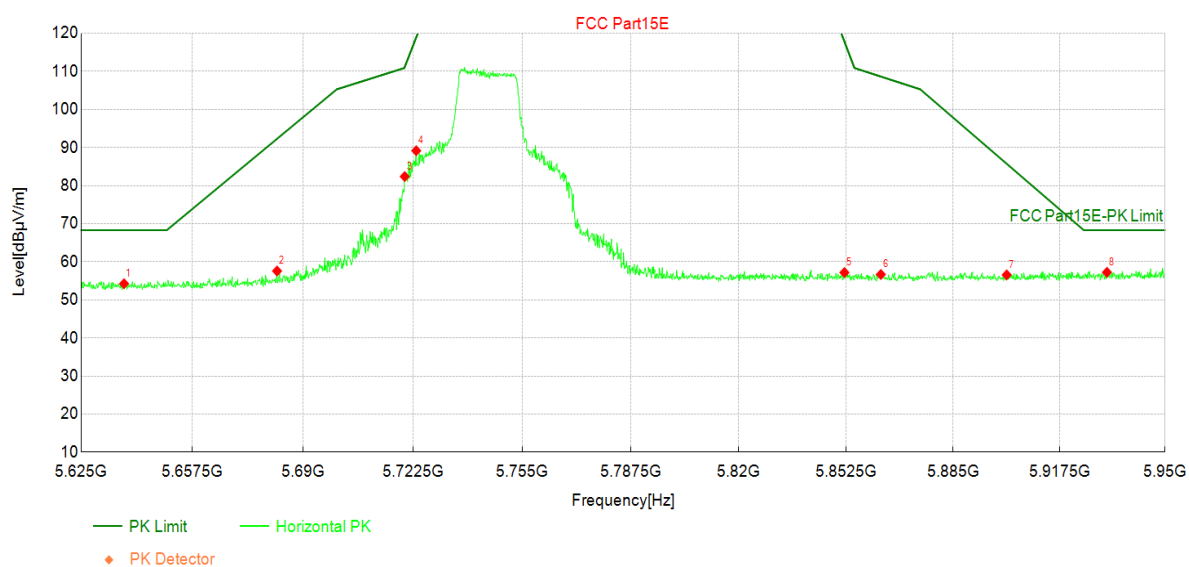

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5638	36.16	54.25	18.09	68.30	14.05	PK	Horizo	PASS
2	5682	39.06	57.59	18.53	92.31	34.72	PK	Horizo	PASS
3	5720	63.71	82.39	18.68	111.15	28.76	PK	Horizo	PASS
4	5724	70.51	89.18	18.67	118.94	29.76	PK	Horizo	PASS
5	5852	38.22	57.18	18.96	117.82	60.64	PK	Horizo	PASS
6	5863	37.64	56.68	19.04	108.65	51.97	PK	Horizo	PASS
7	5901	37.21	56.56	19.35	85.73	29.17	PK	Horizo	PASS
8	5932	37.66	57.24	19.58	68.30	11.06	PK	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 4:Transmit at 5745MHz by 802.11ac(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC Part15E		

Test Graph

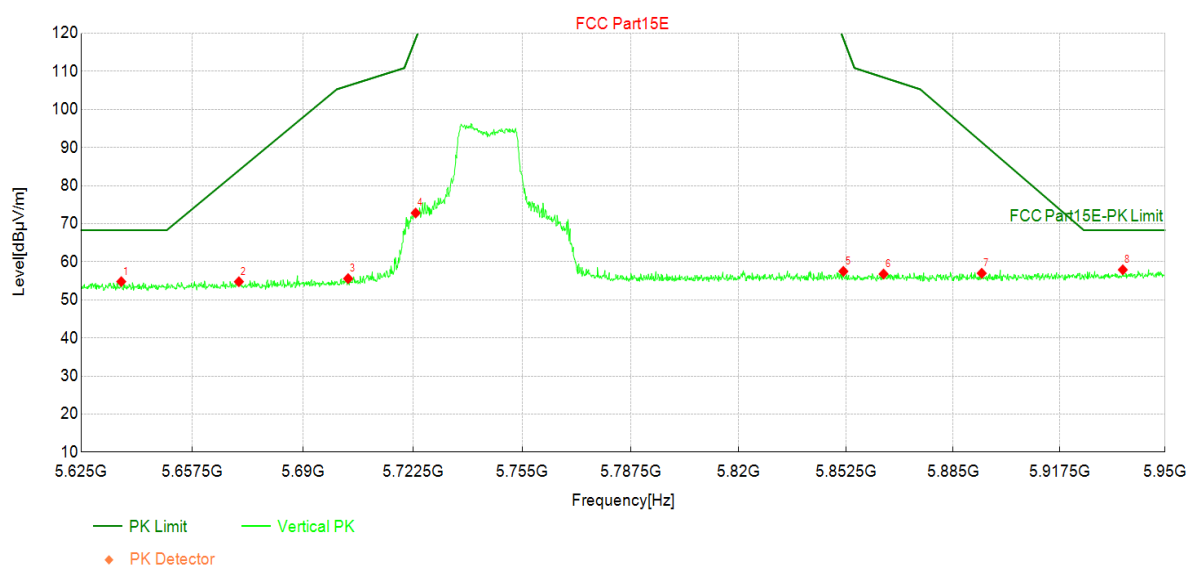

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5637	36.72	54.79	18.07	68.30	13.51	PK	Vertic	PASS
2	5671	36.35	54.77	18.42	84.01	29.24	PK	Vertic	PASS
3	5703	36.87	55.58	18.71	106.24	50.66	PK	Vertic	PASS
4	5723	54.14	72.81	18.67	118.57	45.76	PK	Vertic	PASS
5	5852	38.54	57.49	18.95	118.56	61.07	PK	Vertic	PASS
6	5864	37.74	56.79	19.05	108.42	51.63	PK	Vertic	PASS
7	5894	37.70	56.99	19.29	91.39	34.40	PK	Vertic	PASS
8	5937	38.27	57.90	19.63	68.30	10.40	PK	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 4:Transmit at 5785MHz by 802.11ac(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC Part15E		

Test Graph

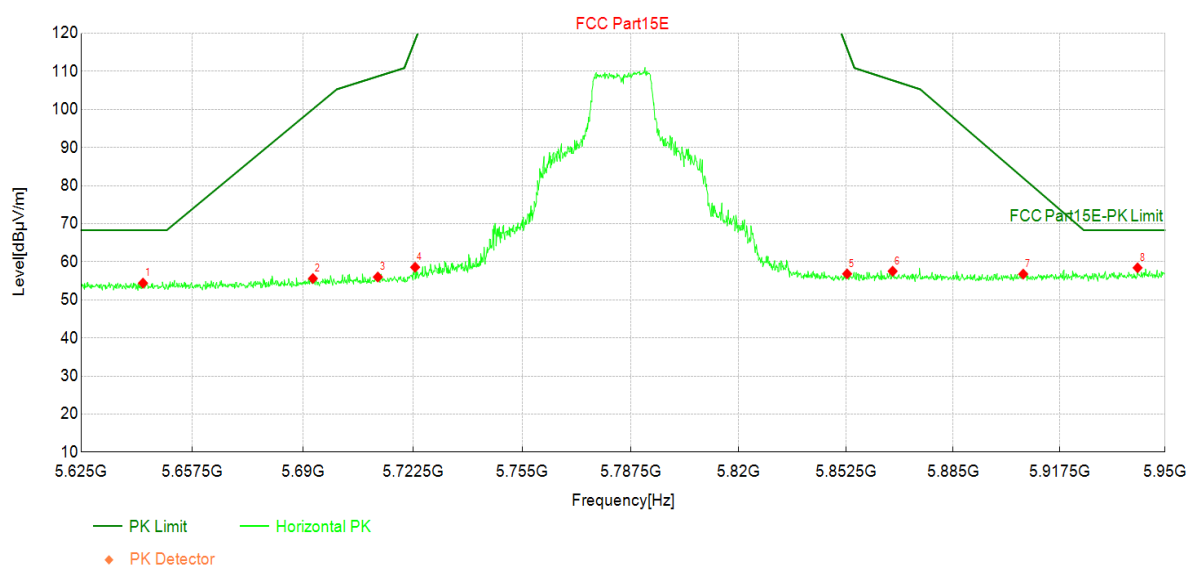

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5643	36.26	54.40	18.14	68.30	13.90	PK	Horizo	PASS
2	5693	36.96	55.60	18.64	100.11	44.51	PK	Horizo	PASS
3	5712	37.31	56.00	18.69	108.70	52.70	PK	Horizo	PASS
4	5723	39.90	58.57	18.67	118.20	59.63	PK	Horizo	PASS
5	5853	37.88	56.84	18.96	115.97	59.13	PK	Horizo	PASS
6	5867	38.45	57.52	19.07	107.65	50.13	PK	Horizo	PASS
7	5906	37.39	56.77	19.38	82.01	25.24	PK	Horizo	PASS
8	5942	38.76	58.42	19.66	68.30	9.88	PK	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 4:Transmit at 5785MHz by 802.11ac(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC Part15E		

Test Graph

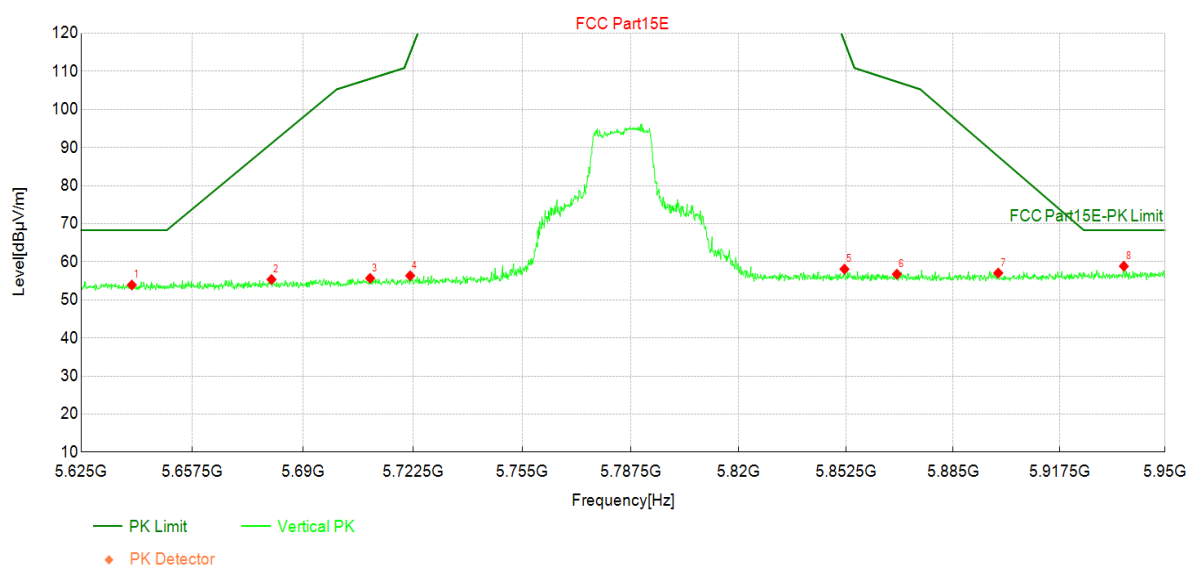

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5640	35.79	53.90	18.11	68.30	14.40	PK	Vertic	PASS
2	5681	36.84	55.36	18.52	91.10	35.74	PK	Vertic	PASS
3	5710	36.97	55.66	18.69	108.07	52.41	PK	Vertic	PASS
4	5722	37.67	56.34	18.67	114.86	58.52	PK	Vertic	PASS
5	5852	39.12	58.08	18.96	117.82	59.74	PK	Vertic	PASS
6	5868	37.66	56.75	19.09	107.29	50.54	PK	Vertic	PASS
7	5899	37.72	57.05	19.33	87.66	30.61	PK	Vertic	PASS
8	5937	39.21	58.84	19.63	68.30	9.46	PK	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 4:Transmit at 5825MHz by 802.11ac(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC Part15E		

Test Graph

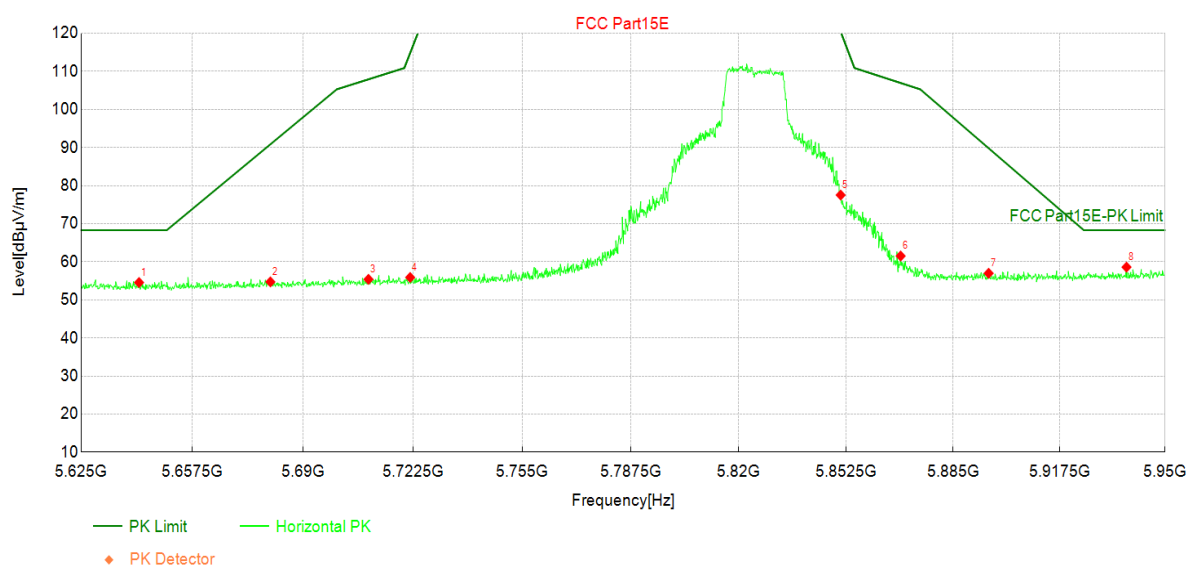

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5642	36.43	54.56	18.13	68.30	13.74	PK	Horizo	PASS
2	5680	36.20	54.72	18.52	90.86	36.14	PK	Horizo	PASS
3	5709	36.70	55.39	18.69	107.93	52.54	PK	Horizo	PASS
4	5722	37.22	55.89	18.67	114.86	58.97	PK	Horizo	PASS
5	5851	58.58	77.53	18.95	120.42	42.89	PK	Horizo	PASS
6	5869	42.44	61.53	19.09	106.97	45.44	PK	Horizo	PASS
7	5896	37.67	56.98	19.31	89.83	32.85	PK	Horizo	PASS
8	5938	38.97	58.60	19.63	68.30	9.70	PK	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 4:Transmit at 5825MHz by 802.11ac(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC Part15E		

Test Graph

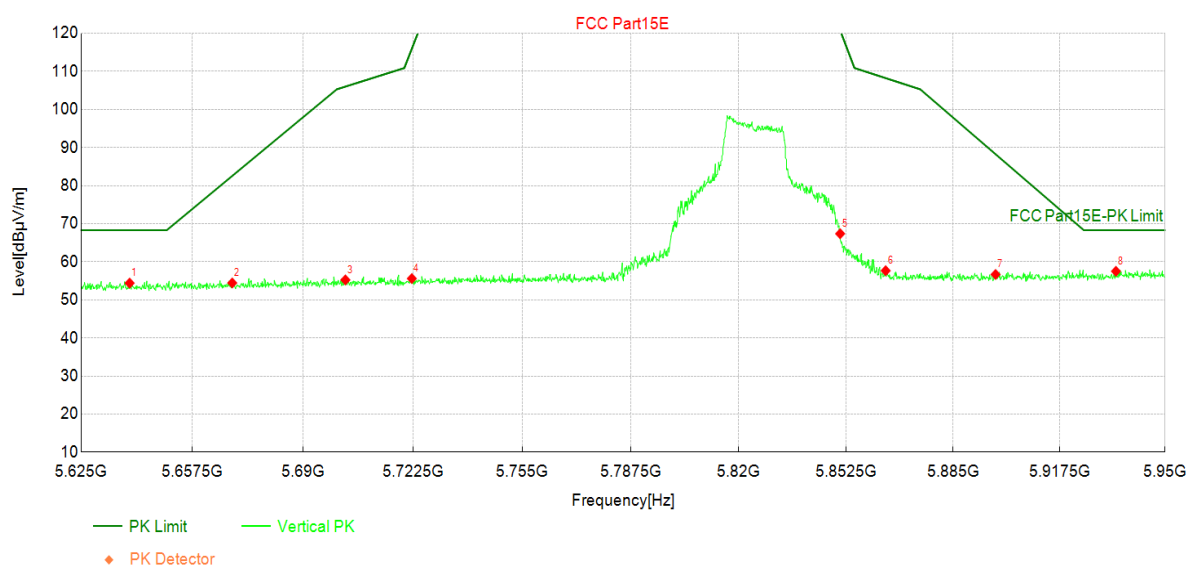

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5639	36.30	54.40	18.10	68.30	13.90	PK	Vertic	PASS
2	5669	36.05	54.45	18.40	82.56	28.11	PK	Vertic	PASS
3	5703	36.52	55.23	18.71	106.02	50.79	PK	Vertic	PASS
4	5722	36.93	55.60	18.67	115.97	60.37	PK	Vertic	PASS
5	5851	48.42	67.37	18.95	120.79	53.42	PK	Vertic	PASS
6	5864	38.60	57.66	19.06	108.24	50.58	PK	Vertic	PASS
7	5898	37.34	56.67	19.33	88.26	31.59	PK	Vertic	PASS
8	5935	37.91	57.51	19.60	68.30	10.79	PK	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 5:Transmit at 5755MHz by 802.11ac(40MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃ ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC Part15E		

Test Graph

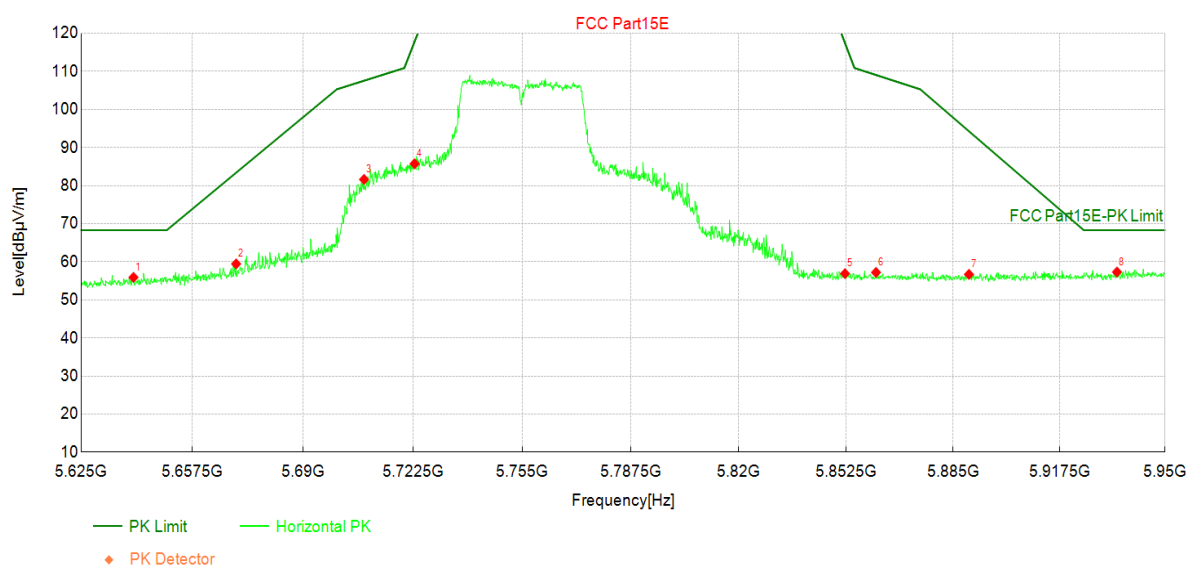

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5640	37.79	55.90	18.11	68.30	12.40	PK	Horizo	PASS
2	5670	41.03	59.44	18.41	83.41	23.97	PK	Horizo	PASS
3	5708	62.93	81.63	18.70	107.56	25.93	PK	Horizo	PASS
4	5723	67.08	85.75	18.67	117.82	32.07	PK	Horizo	PASS
5	5852	37.93	56.89	18.96	117.45	60.56	PK	Horizo	PASS
6	5862	38.18	57.21	19.03	109.06	51.85	PK	Horizo	PASS
7	5890	37.43	56.69	19.26	94.28	37.59	PK	Horizo	PASS
8	5935	37.70	57.31	19.61	68.30	10.99	PK	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 5:Transmit at 5755MHz by 802.11ac(40MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC Part15E		

Test Graph

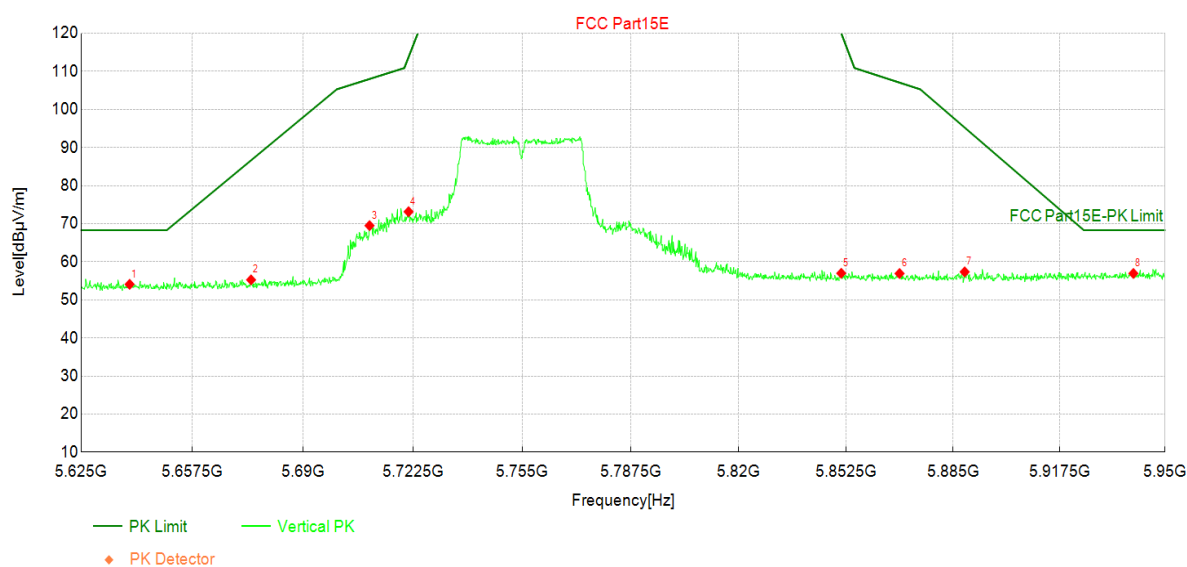

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5639	35.98	54.08	18.10	68.30	14.22	PK	Vertic	PASS
2	5675	36.80	55.26	18.46	86.66	31.40	PK	Vertic	PASS
3	5710	50.81	69.50	18.69	108.02	38.52	PK	Vertic	PASS
4	5721	54.48	73.16	18.68	113.75	40.59	PK	Vertic	PASS
5	5851	38.04	56.99	18.95	120.05	63.06	PK	Vertic	PASS
6	5869	37.83	56.92	19.09	107.06	50.14	PK	Vertic	PASS
7	5889	38.12	57.36	19.24	95.25	37.89	PK	Vertic	PASS
8	5940	37.30	56.94	19.64	68.30	11.36	PK	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 5:Transmit at 5795MHz by 802.11ac(40MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC Part15E		

Test Graph

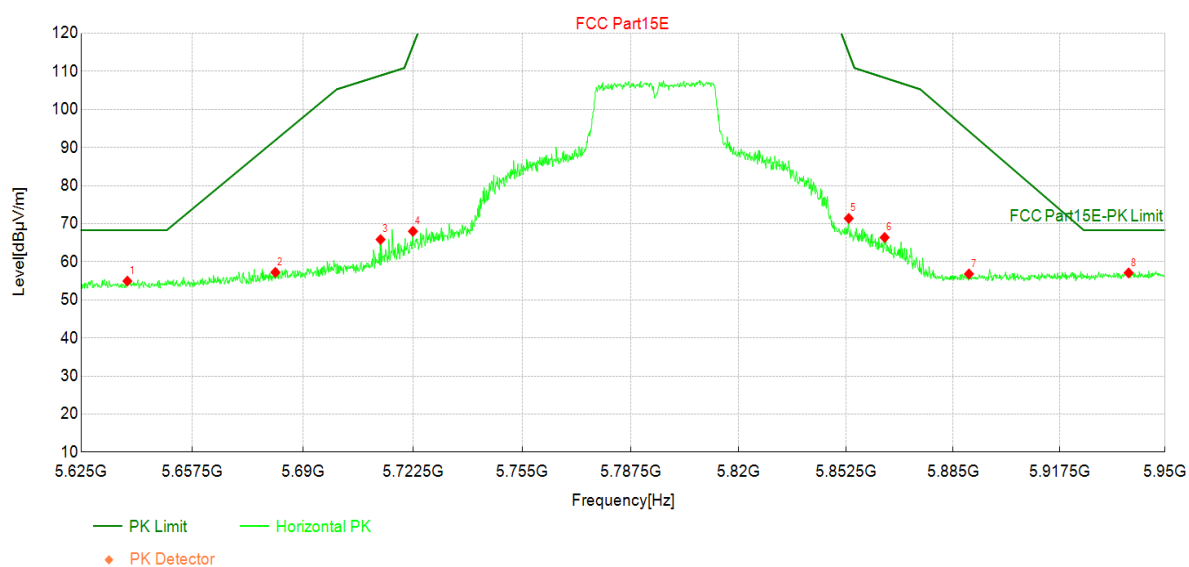

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5638	36.83	54.93	18.10	68.30	13.37	PK	Horizo	PASS
2	5682	38.70	57.23	18.53	91.95	34.72	PK	Horizo	PASS
3	5713	47.17	65.86	18.69	108.93	43.07	PK	Horizo	PASS
4	5723	49.33	68.00	18.67	116.71	48.71	PK	Horizo	PASS
5	5853	52.44	71.40	18.96	114.86	43.46	PK	Horizo	PASS
6	5864	47.33	66.39	19.06	108.33	41.94	PK	Horizo	PASS
7	5890	37.55	56.81	19.26	94.28	37.47	PK	Horizo	PASS
8	5939	37.44	57.08	19.64	68.30	11.22	PK	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 5:Transmit at 5795MHz by 802.11ac(40MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC Part15E		

Test Graph

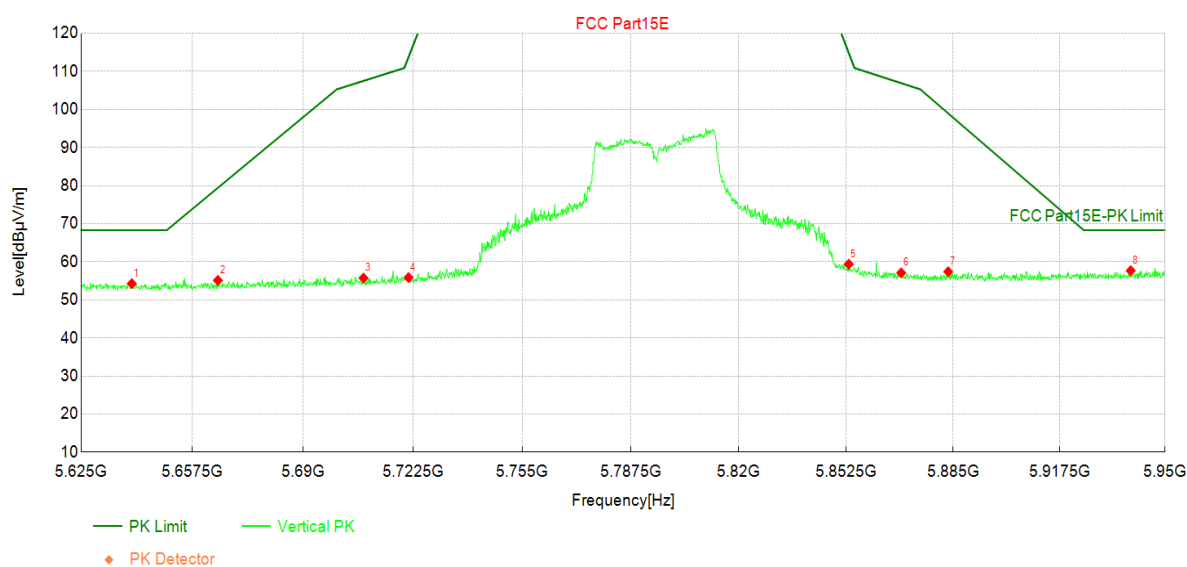

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5640	36.16	54.27	18.11	68.30	14.03	PK	Vertic	PASS
2	5665	36.76	55.12	18.36	79.43	24.31	PK	Vertic	PASS
3	5708	37.02	55.72	18.70	107.52	51.80	PK	Vertic	PASS
4	5721	37.18	55.86	18.68	113.75	57.89	PK	Vertic	PASS
5	5853	40.41	59.37	18.96	114.86	55.49	PK	Vertic	PASS
6	5869	38.02	57.11	19.09	106.92	49.81	PK	Vertic	PASS
7	5884	38.18	57.39	19.21	98.98	41.59	PK	Vertic	PASS
8	5939	38.03	57.67	19.64	68.30	10.63	PK	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 6:Transmit at 5775MHz by 802.11ac(80MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC Part15E		

Test Graph

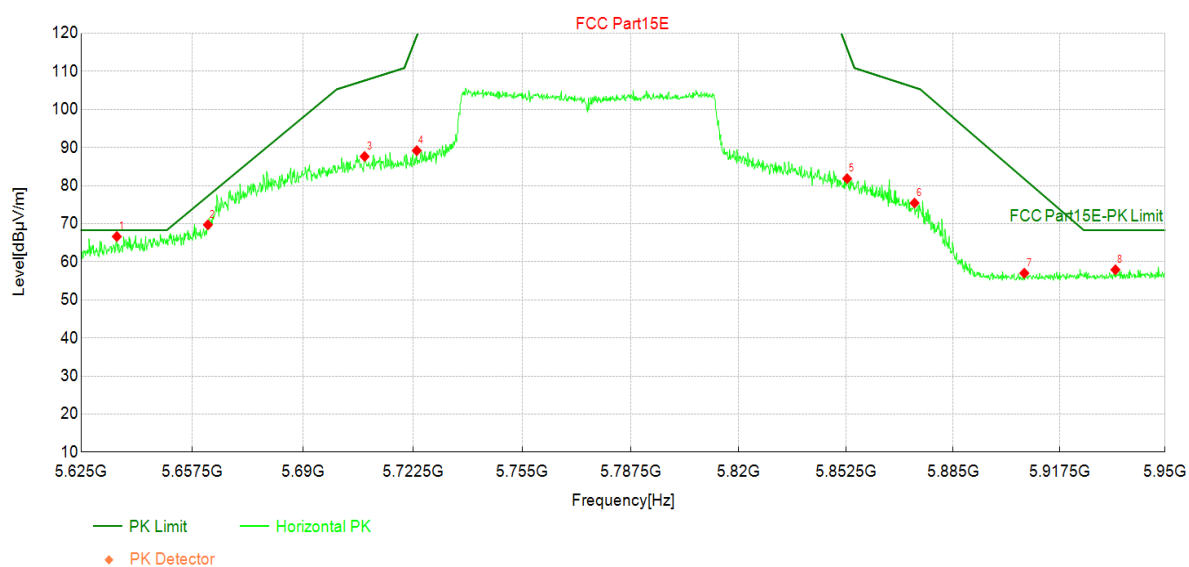

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5635	48.57	66.63	18.06	68.30	1.67	PK	Horizo	PASS
2	5662	51.39	69.72	18.33	77.26	7.54	PK	Horizo	PASS
3	5708	68.97	87.67	18.70	107.61	19.94	PK	Horizo	PASS
4	5724	70.52	89.19	18.67	119.31	30.12	PK	Horizo	PASS
5	5853	62.88	81.84	18.96	115.97	34.13	PK	Horizo	PASS
6	5873	56.30	75.43	19.13	105.79	30.36	PK	Horizo	PASS
7	5907	37.61	57.01	19.40	81.77	24.76	PK	Horizo	PASS
8	5935	38.31	57.91	19.60	68.30	10.39	PK	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 6:Transmit at 5775MHz by 802.11ac(80MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC Part15E		

Test Graph

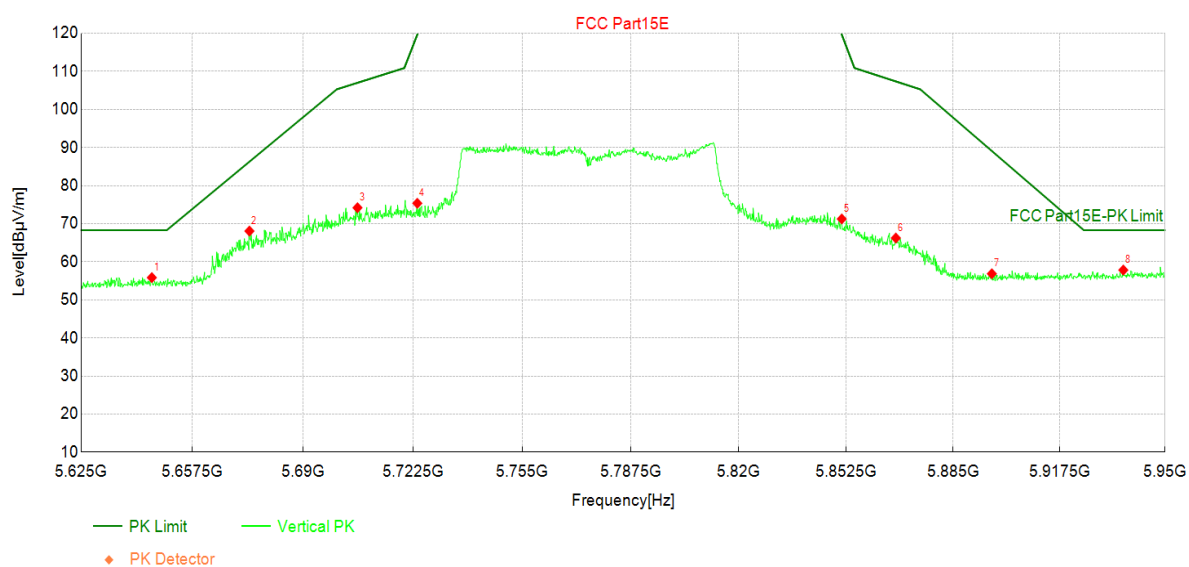

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5646	37.68	55.84	18.16	68.30	12.46	PK	Vertic	PASS
2	5674	49.62	68.07	18.45	86.29	18.22	PK	Vertic	PASS
3	5706	55.50	74.20	18.70	107.02	32.82	PK	Vertic	PASS
4	5724	56.71	75.37	18.66	119.68	44.31	PK	Vertic	PASS
5	5851	52.31	71.26	18.95	119.68	48.42	PK	Vertic	PASS
6	5868	47.15	66.24	19.09	107.38	41.14	PK	Vertic	PASS
7	5897	37.56	56.87	19.31	89.10	32.23	PK	Vertic	PASS
8	5937	38.20	57.83	19.63	68.30	10.47	PK	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 7:Transmit at 5745MHz by 802.11ax(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC Part15E		

Test Graph

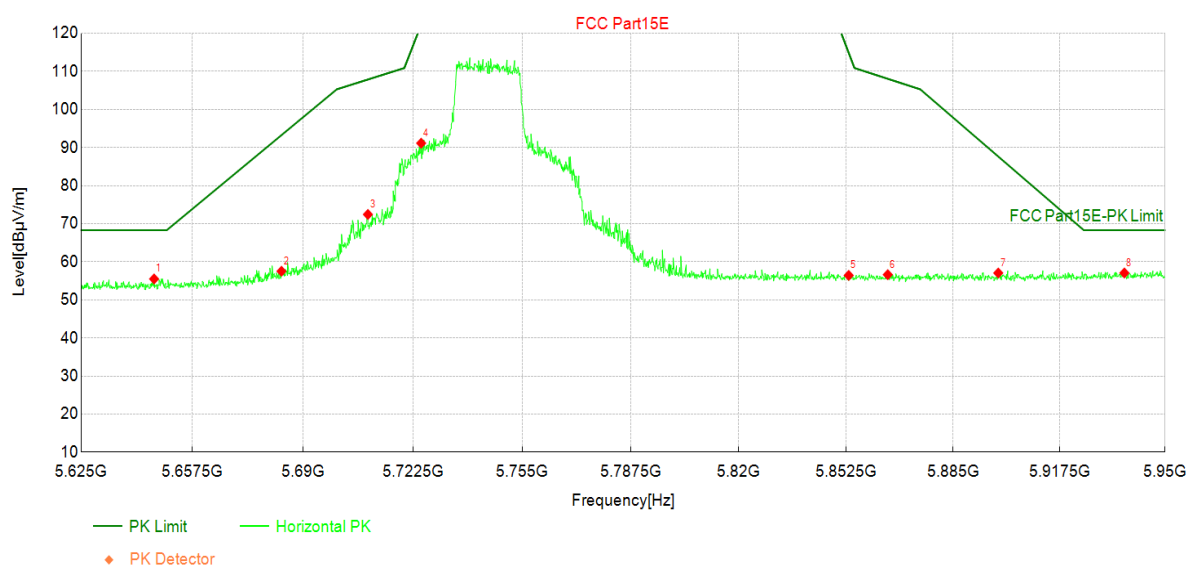

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5646	37.32	55.50	18.18	68.30	12.80	PK	Horizo	PASS
2	5684	38.98	57.52	18.54	93.27	35.75	PK	Horizo	PASS
3	5709	53.75	72.44	18.69	107.88	35.44	PK	Horizo	PASS
4	5725	72.49	91.16	18.67	122.27	31.11	PK	Horizo	PASS
5	5853	37.47	56.43	18.96	114.86	58.43	PK	Horizo	PASS
6	5865	37.56	56.62	19.06	108.06	51.44	PK	Horizo	PASS
7	5899	37.73	57.06	19.33	87.66	30.60	PK	Horizo	PASS
8	5937	37.43	57.06	19.63	68.30	11.24	PK	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 7:Transmit at 5745MHz by 802.11ax(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC Part15E		

Test Graph

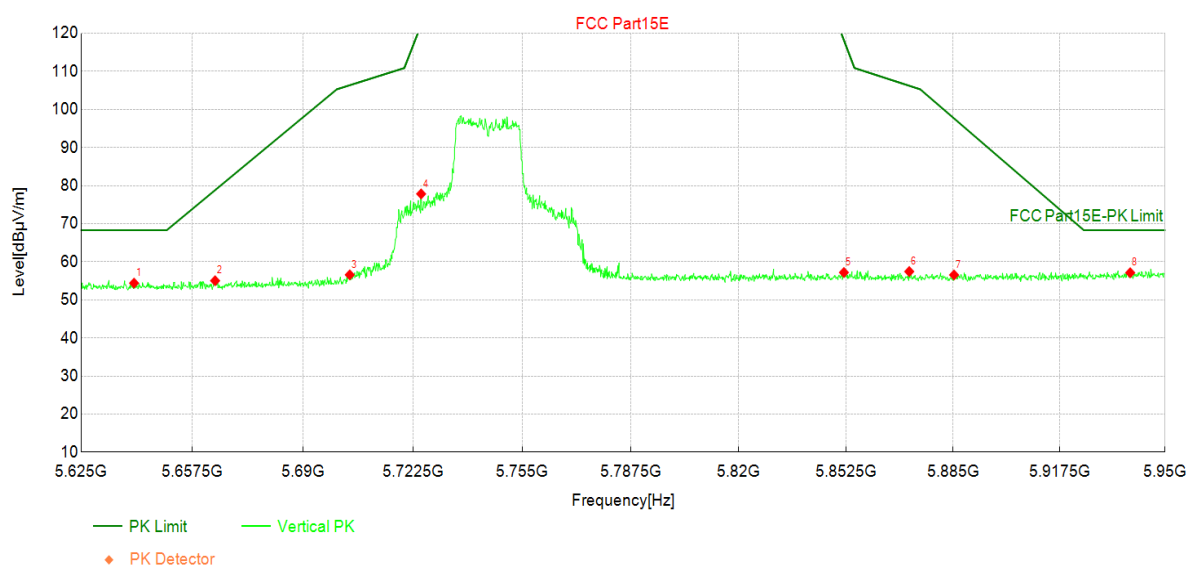

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5640	36.29	54.40	18.11	68.30	13.90	PK	Vertic	PASS
2	5664	36.68	55.03	18.35	78.83	23.80	PK	Vertic	PASS
3	5704	37.88	56.58	18.70	106.38	49.80	PK	Vertic	PASS
4	5725	59.16	77.83	18.67	122.27	44.44	PK	Vertic	PASS
5	5852	38.24	57.20	18.96	118.19	60.99	PK	Vertic	PASS
6	5872	38.33	57.44	19.11	106.24	48.80	PK	Vertic	PASS
7	5885	37.31	56.54	19.23	97.66	41.12	PK	Vertic	PASS
8	5939	37.49	57.13	19.64	68.30	11.17	PK	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 7:Transmit at 5785MHz by 802.11ax(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC Part15E		

Test Graph

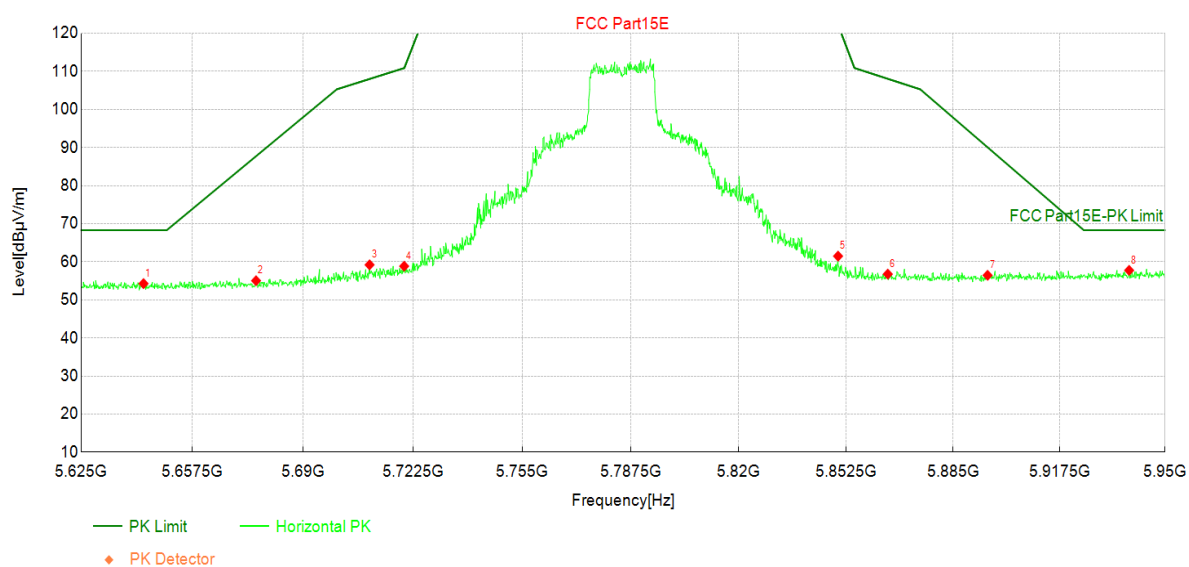

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5643	36.13	54.27	18.14	68.30	14.03	PK	Horizo	PASS
2	5676	36.55	55.03	18.48	87.74	32.71	PK	Horizo	PASS
3	5710	40.51	59.20	18.69	108.02	48.82	PK	Horizo	PASS
4	5720	40.17	58.85	18.68	110.89	52.04	PK	Horizo	PASS
5	5850	42.54	61.49	18.95	122.27	60.78	PK	Horizo	PASS
6	5865	37.71	56.77	19.06	108.06	51.29	PK	Horizo	PASS
7	5896	37.15	56.45	19.30	90.07	33.62	PK	Horizo	PASS
8	5939	38.11	57.75	19.64	68.30	10.55	PK	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 7:Transmit at 5785MHz by 802.11ax(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC Part15E		

Test Graph

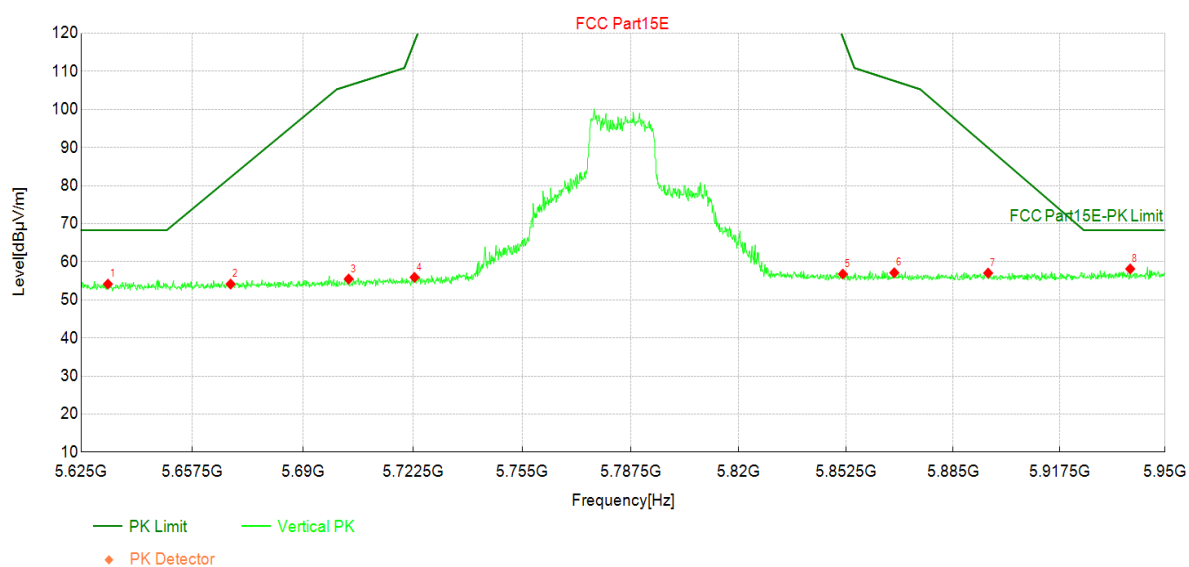

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5633	36.11	54.15	18.04	68.30	14.15	PK	Vertic	PASS
2	5669	35.74	54.14	18.40	82.20	28.06	PK	Vertic	PASS
3	5704	36.77	55.48	18.71	106.29	50.81	PK	Vertic	PASS
4	5723	37.25	55.92	18.67	117.82	61.90	PK	Vertic	PASS
5	5851	37.83	56.78	18.95	118.93	62.15	PK	Vertic	PASS
6	5867	38.06	57.13	19.07	107.51	50.38	PK	Vertic	PASS
7	5896	37.73	57.04	19.31	89.95	32.91	PK	Vertic	PASS
8	5939	38.49	58.13	19.64	68.30	10.17	PK	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 7:Transmit at 5825MHz by 802.11ax(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC Part15E		

Test Graph

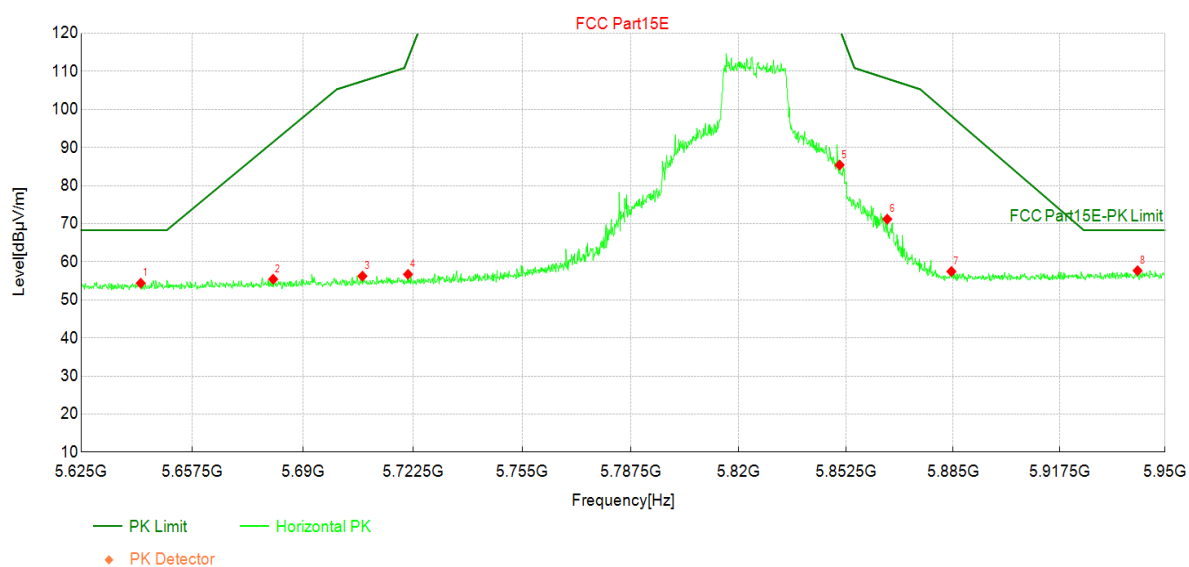

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5642	36.25	54.39	18.14	68.30	13.91	PK	Horizo	PASS
2	5681	36.89	55.42	18.53	91.47	36.05	PK	Horizo	PASS
3	5708	37.54	56.24	18.70	107.43	51.19	PK	Horizo	PASS
4	5721	38.02	56.70	18.68	113.38	56.68	PK	Horizo	PASS
5	5851	66.47	85.42	18.95	121.16	35.74	PK	Horizo	PASS
6	5865	52.14	71.20	19.06	108.11	36.91	PK	Horizo	PASS
7	5884	38.25	57.46	19.21	98.26	40.80	PK	Horizo	PASS
8	5942	38.01	57.67	19.66	68.30	10.63	PK	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 7:Transmit at 5825MHz by 802.11ax(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC Part15E		

Test Graph

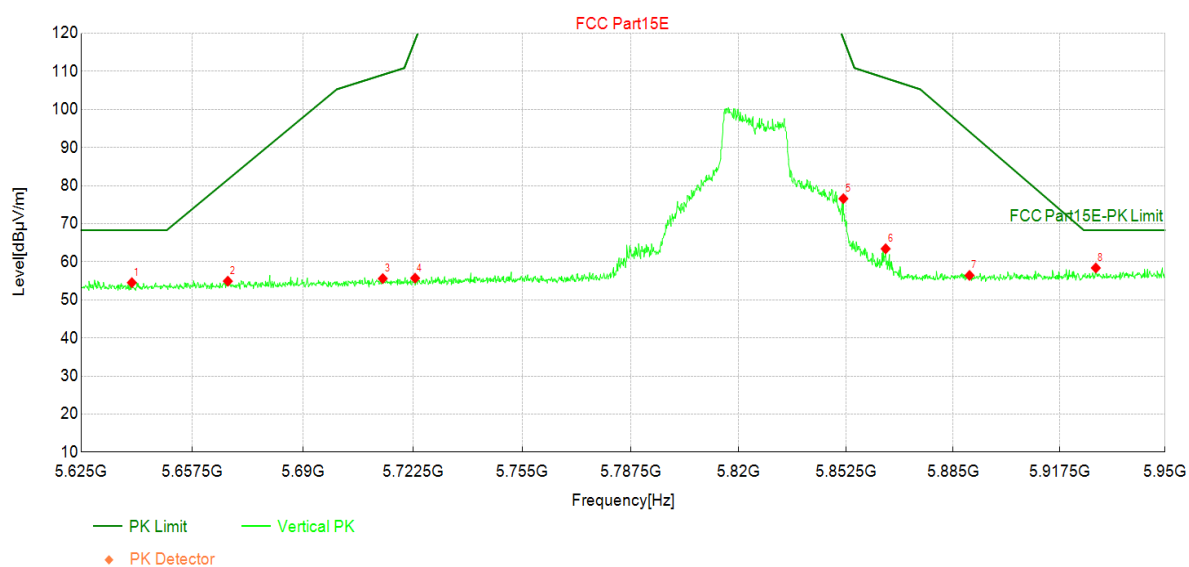

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5640	36.41	54.52	18.11	68.30	13.78	PK	Vertic	PASS
2	5668	36.52	54.91	18.39	81.60	26.69	PK	Vertic	PASS
3	5714	36.90	55.59	18.69	109.11	53.52	PK	Vertic	PASS
4	5723	37.03	55.70	18.67	118.20	62.50	PK	Vertic	PASS
5	5852	57.63	76.58	18.95	118.56	41.98	PK	Vertic	PASS
6	5864	44.36	63.42	19.06	108.24	44.82	PK	Vertic	PASS
7	5890	37.16	56.42	19.26	94.16	37.74	PK	Vertic	PASS
8	5929	38.82	58.38	19.56	68.30	9.92	PK	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 8:Transmit at 5755MHz by 802.11ax(40MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC Part15E		

Test Graph

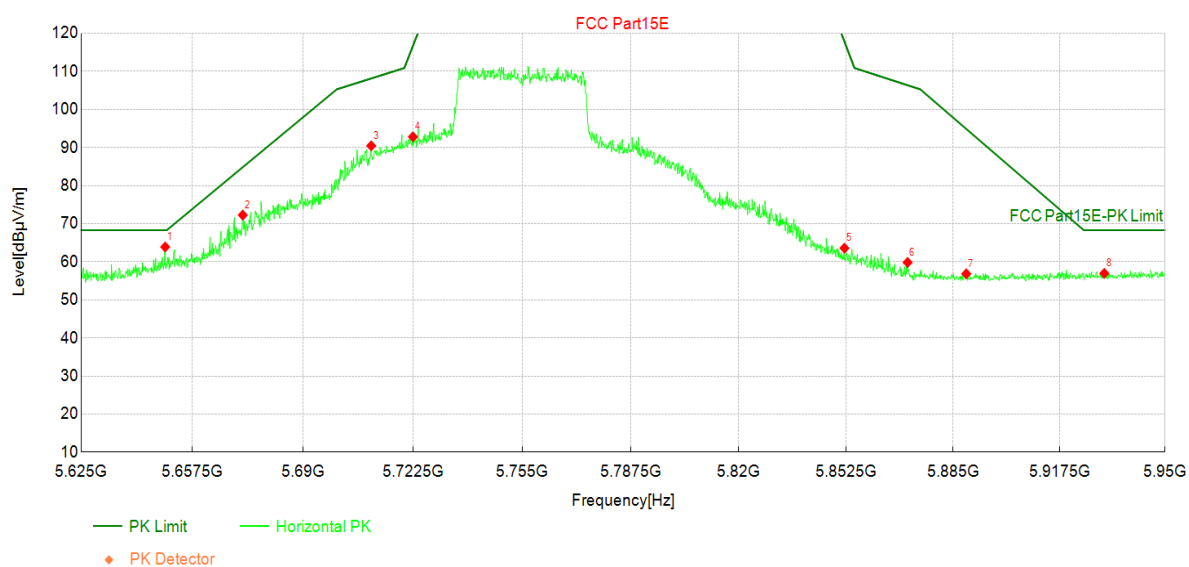

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5650	45.70	63.90	18.20	68.30	4.40	PK	Horizo	PASS
2	5672	53.83	72.27	18.44	84.85	12.58	PK	Horizo	PASS
3	5710	71.77	90.46	18.69	108.16	17.70	PK	Horizo	PASS
4	5723	74.16	92.83	18.67	116.71	23.88	PK	Horizo	PASS
5	5852	44.62	63.58	18.96	117.82	54.24	PK	Horizo	PASS
6	5871	40.72	59.83	19.11	106.38	46.55	PK	Horizo	PASS
7	5889	37.60	56.85	19.25	94.88	38.03	PK	Horizo	PASS
8	5931	37.38	56.96	19.58	68.30	11.34	PK	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 8:Transmit at 5755MHz by 802.11ax(40MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC Part15E		

Test Graph

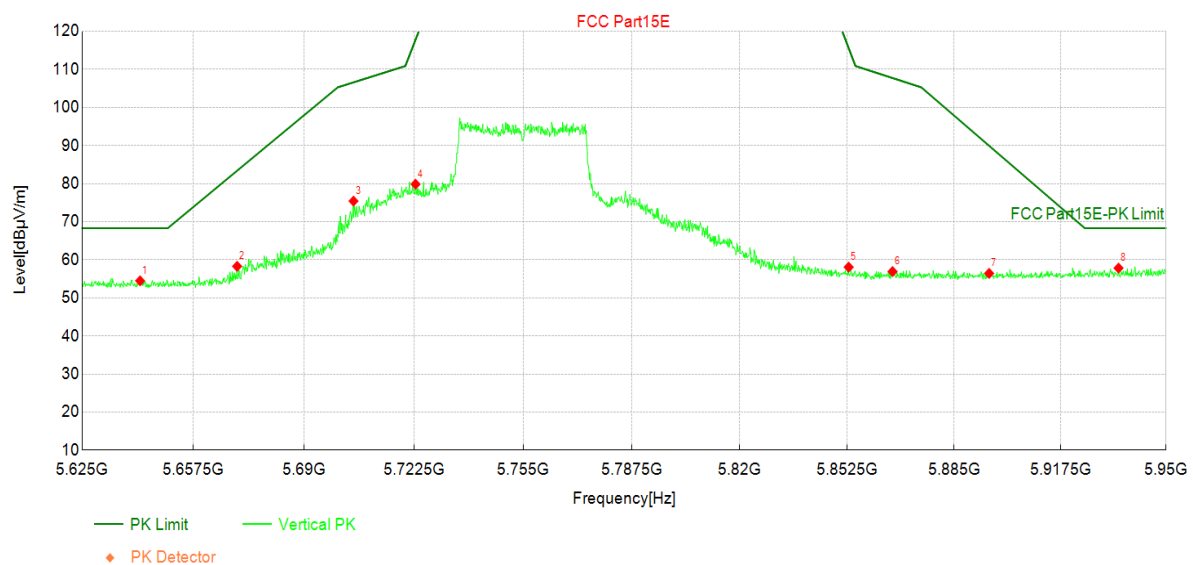

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5642	36.35	54.48	18.13	68.30	13.82	PK	Vertic	PASS
2	5670	39.88	58.29	18.41	83.41	25.12	PK	Vertic	PASS
3	5705	56.72	75.42	18.70	106.61	31.19	PK	Vertic	PASS
4	5723	61.19	79.86	18.67	117.82	37.96	PK	Vertic	PASS
5	5853	39.12	58.08	18.96	115.60	57.52	PK	Vertic	PASS
6	5866	37.84	56.91	19.07	107.74	50.83	PK	Vertic	PASS
7	5896	37.12	56.43	19.31	89.95	33.52	PK	Vertic	PASS
8	5935	38.21	57.82	19.61	68.30	10.48	PK	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 8:Transmit at 5795MHz by 802.11ax(40MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC Part15E		

Test Graph

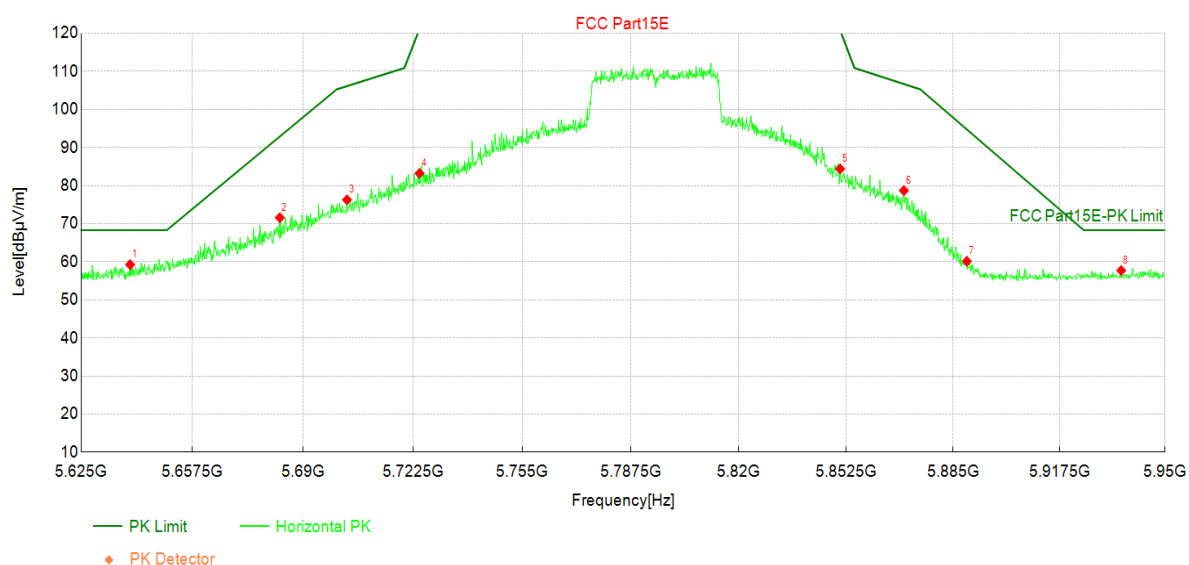

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5639	41.14	59.24	18.10	68.30	9.06	PK	Horizo	PASS
2	5683	53.05	71.59	18.54	92.91	21.32	PK	Horizo	PASS
3	5703	57.57	76.28	18.71	106.15	29.87	PK	Horizo	PASS
4	5724	64.57	83.24	18.67	121.16	37.92	PK	Horizo	PASS
5	5851	65.47	84.42	18.95	120.79	36.37	PK	Horizo	PASS
6	5870	59.61	78.71	19.10	106.70	27.99	PK	Horizo	PASS
7	5889	40.89	60.15	19.26	94.76	34.61	PK	Horizo	PASS
8	5937	38.10	57.71	19.61	68.30	10.59	PK	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 8:Transmit at 5795MHz by 802.11ax(40MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC Part15E		

Test Graph

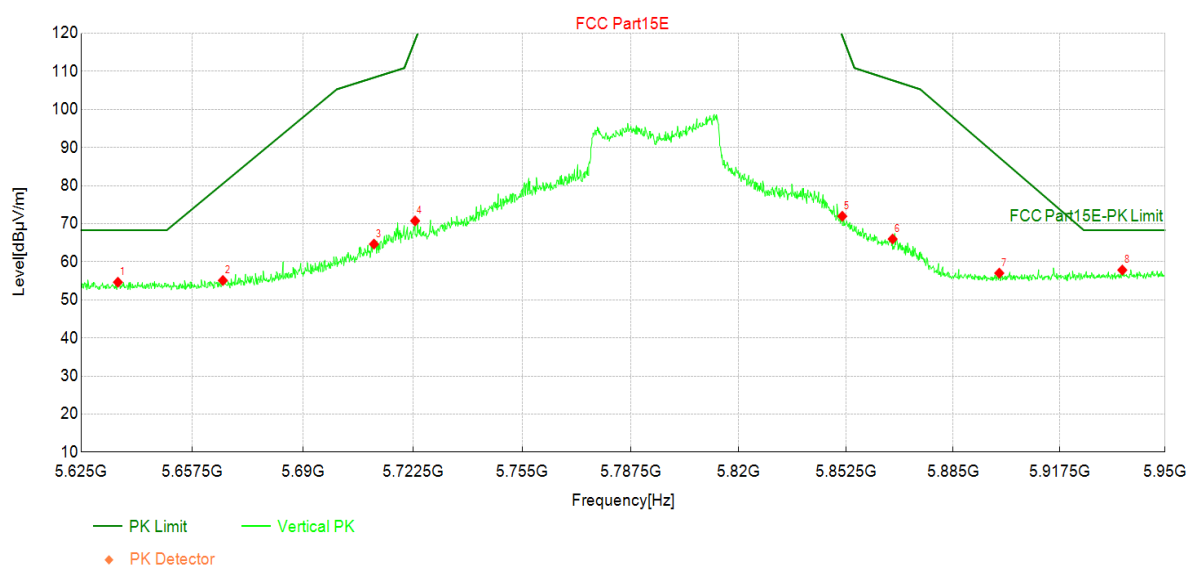

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5636	36.57	54.64	18.07	68.30	13.66	PK	Vertic	PASS
2	5666	36.72	55.09	18.37	80.52	25.43	PK	Vertic	PASS
3	5711	45.94	64.64	18.70	108.38	43.74	PK	Vertic	PASS
4	5723	52.08	70.75	18.67	118.20	47.45	PK	Vertic	PASS
5	5851	53.02	71.97	18.95	119.31	47.34	PK	Vertic	PASS
6	5867	46.91	65.98	19.07	107.65	41.67	PK	Vertic	PASS
7	5899	37.69	57.02	19.33	87.42	30.40	PK	Vertic	PASS
8	5937	38.21	57.83	19.62	68.30	10.47	PK	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 9:Transmit at 5775MHz by 802.11ax(80MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC Part15E		

Test Graph

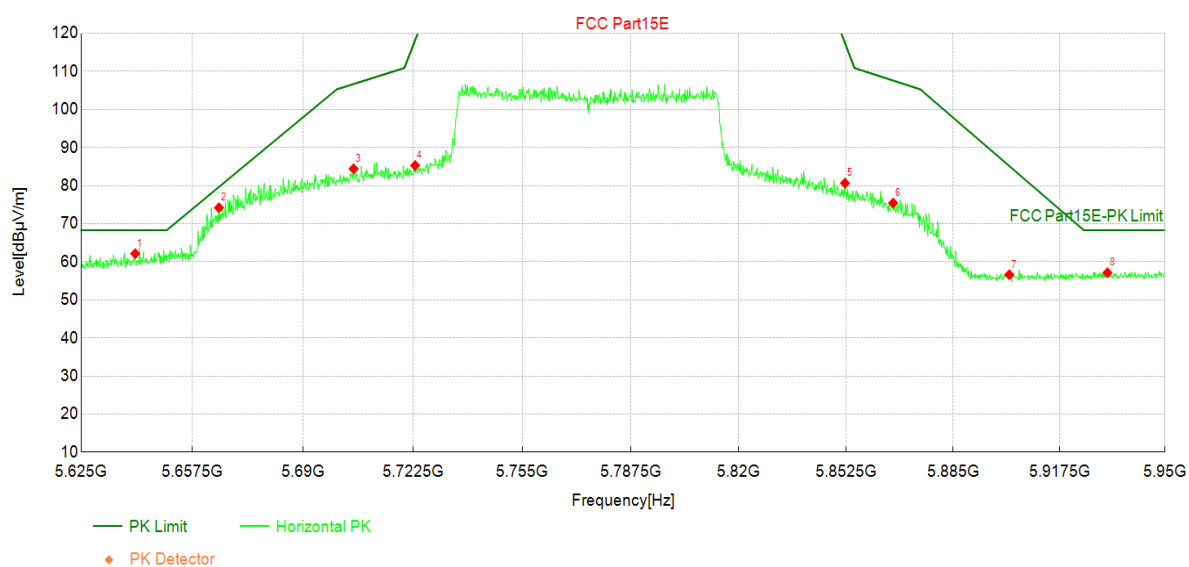

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5641	44.03	62.14	18.11	68.30	6.16	PK	Horizo	PASS
2	5665	55.84	74.20	18.36	79.67	5.47	PK	Horizo	PASS
3	5705	65.73	84.43	18.70	106.70	22.27	PK	Horizo	PASS
4	5723	66.61	85.28	18.67	118.20	32.92	PK	Horizo	PASS
5	5852	61.70	80.66	18.96	117.45	36.79	PK	Horizo	PASS
6	5867	56.35	75.42	19.07	107.61	32.19	PK	Horizo	PASS
7	5902	37.26	56.62	19.36	85.13	28.51	PK	Horizo	PASS
8	5932	37.55	57.13	19.58	68.30	11.17	PK	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 9:Transmit at 5775MHz by 802.11ax(80MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC Part15E		

Test Graph

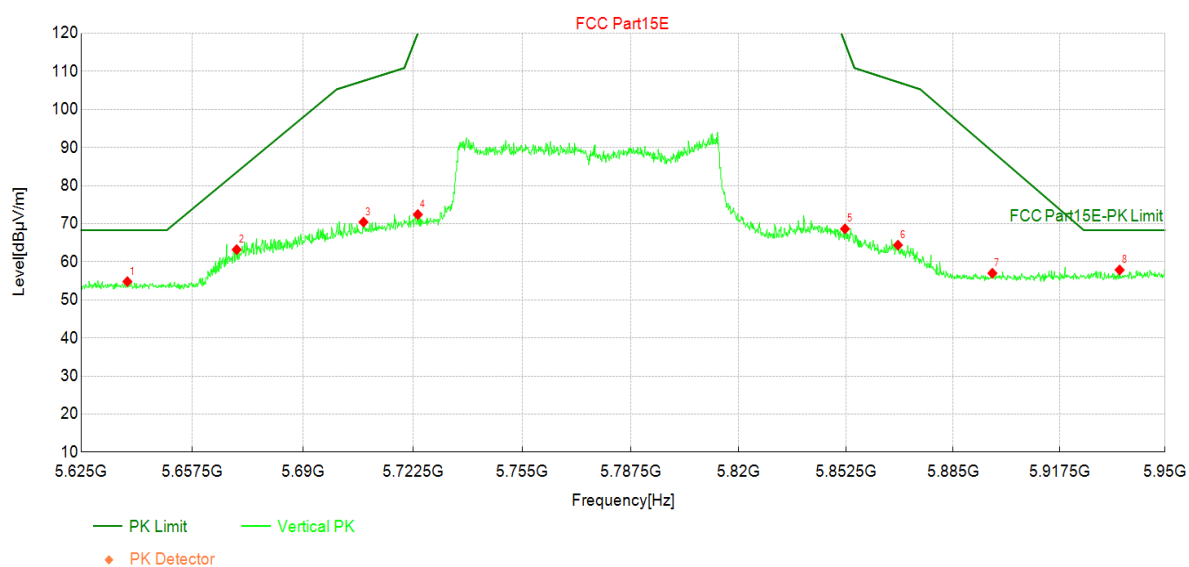

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5638	36.69	54.79	18.10	68.30	13.51	PK	Vertic	PASS
2	5671	44.79	63.20	18.41	83.53	20.33	PK	Vertic	PASS
3	5708	51.73	70.43	18.70	107.52	37.09	PK	Vertic	PASS
4	5724	53.74	72.41	18.67	120.05	47.64	PK	Vertic	PASS
5	5852	49.69	68.65	18.96	117.45	48.80	PK	Vertic	PASS
6	5868	45.29	64.38	19.09	107.20	42.82	PK	Vertic	PASS
7	5897	37.69	57.00	19.31	88.98	31.98	PK	Vertic	PASS
8	5936	38.24	57.85	19.61	68.30	10.45	PK	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 10:Transmit at 5745MHz by 802.11be(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC Part15E		

Test Graph

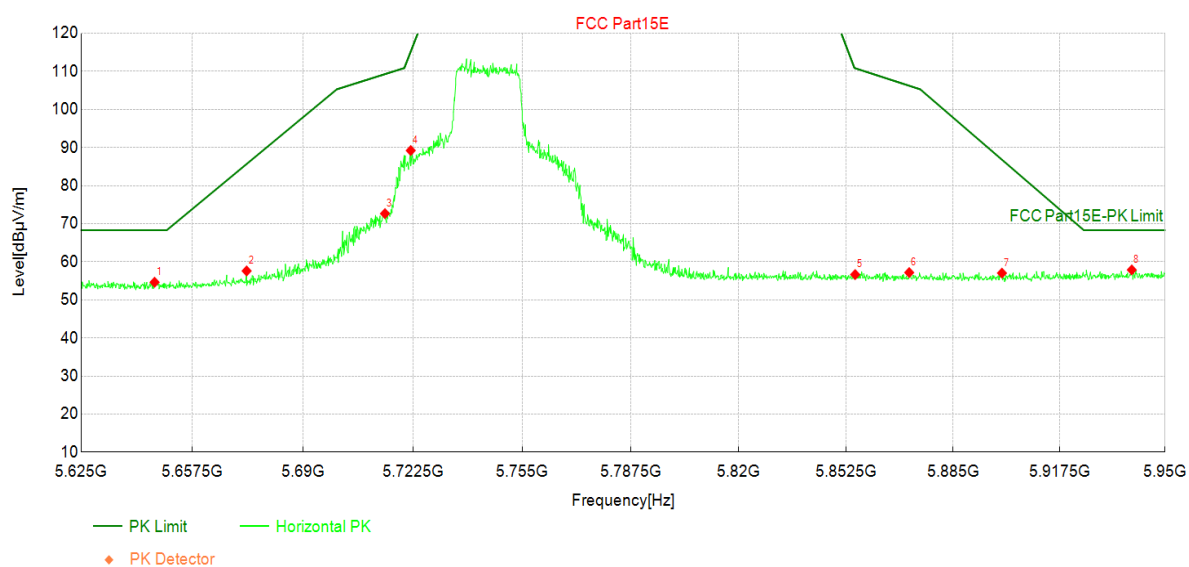

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5646	36.45	54.63	18.18	68.30	13.67	PK	Horizo	PASS
2	5673	39.15	57.60	18.45	85.69	28.09	PK	Horizo	PASS
3	5714	53.98	72.66	18.68	109.29	36.63	PK	Horizo	PASS
4	5722	70.56	89.23	18.67	115.23	26.00	PK	Horizo	PASS
5	5855	37.67	56.65	18.98	110.84	54.19	PK	Horizo	PASS
6	5872	38.06	57.17	19.11	106.24	49.07	PK	Horizo	PASS
7	5900	37.69	57.03	19.34	86.82	29.79	PK	Horizo	PASS
8	5940	38.23	57.87	19.64	68.30	10.43	PK	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 10:Transmit at 5745MHz by 802.11be(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC Part15E		

Test Graph

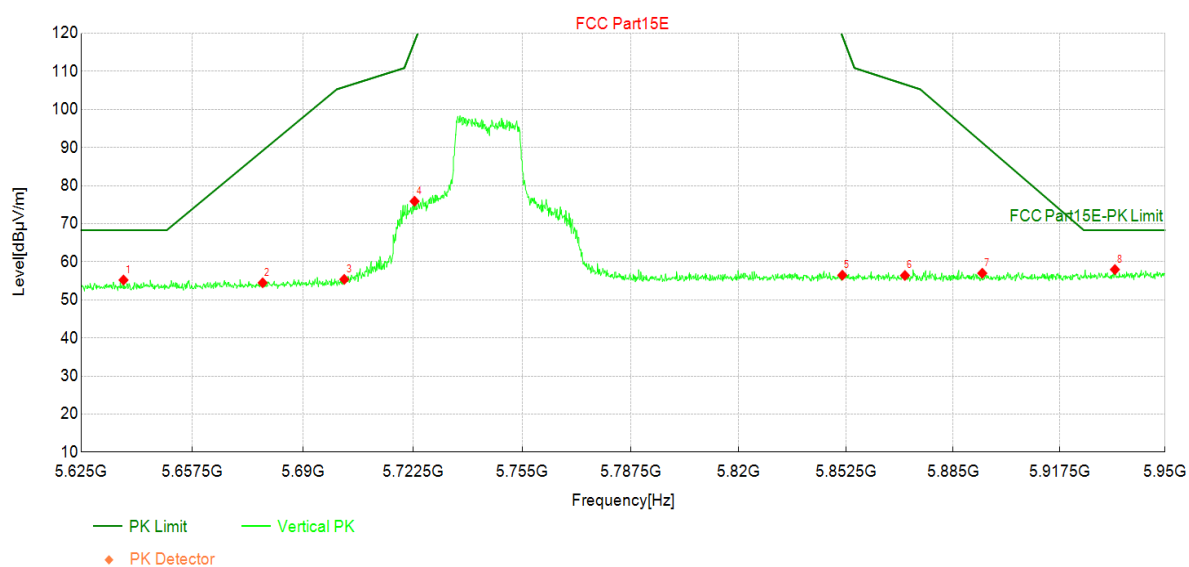

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5637	37.12	55.21	18.09	68.30	13.09	PK	Vertic	PASS
2	5678	35.99	54.48	18.49	89.18	34.70	PK	Vertic	PASS
3	5702	36.68	55.39	18.71	105.92	50.53	PK	Vertic	PASS
4	5723	57.22	75.89	18.67	117.82	41.93	PK	Vertic	PASS
5	5851	37.53	56.48	18.95	119.31	62.83	PK	Vertic	PASS
6	5870	37.31	56.41	19.10	106.60	50.19	PK	Vertic	PASS
7	5894	37.69	56.99	19.30	91.27	34.28	PK	Vertic	PASS
8	5935	38.36	57.96	19.60	68.30	10.34	PK	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 10:Transmit at 5785MHz by 802.11be(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC Part15E		

Test Graph

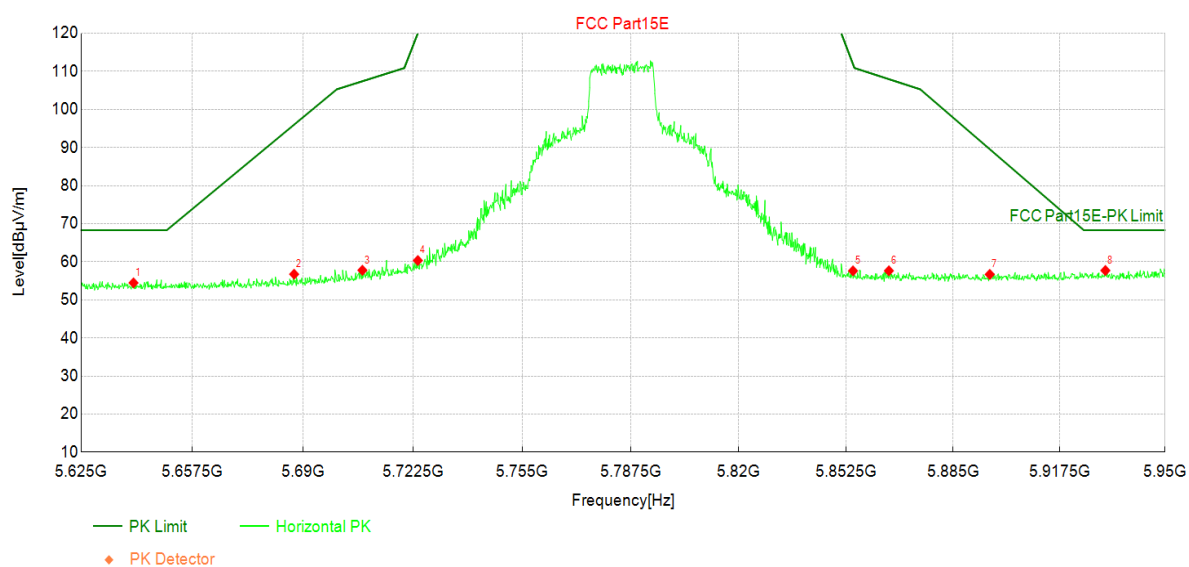

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5640	36.36	54.47	18.11	68.30	13.83	PK	Horizo	PASS
2	5687	38.16	56.74	18.58	96.03	39.29	PK	Horizo	PASS
3	5708	39.07	57.77	18.70	107.43	49.66	PK	Horizo	PASS
4	5724	41.67	60.34	18.67	120.05	59.71	PK	Horizo	PASS
5	5855	38.64	57.62	18.98	111.89	54.27	PK	Horizo	PASS
6	5865	38.58	57.64	19.06	107.97	50.33	PK	Horizo	PASS
7	5896	37.38	56.69	19.31	89.58	32.89	PK	Horizo	PASS
8	5932	38.13	57.71	19.58	68.30	10.59	PK	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 10:Transmit at 5785MHz by 802.11be(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC Part15E		

Test Graph

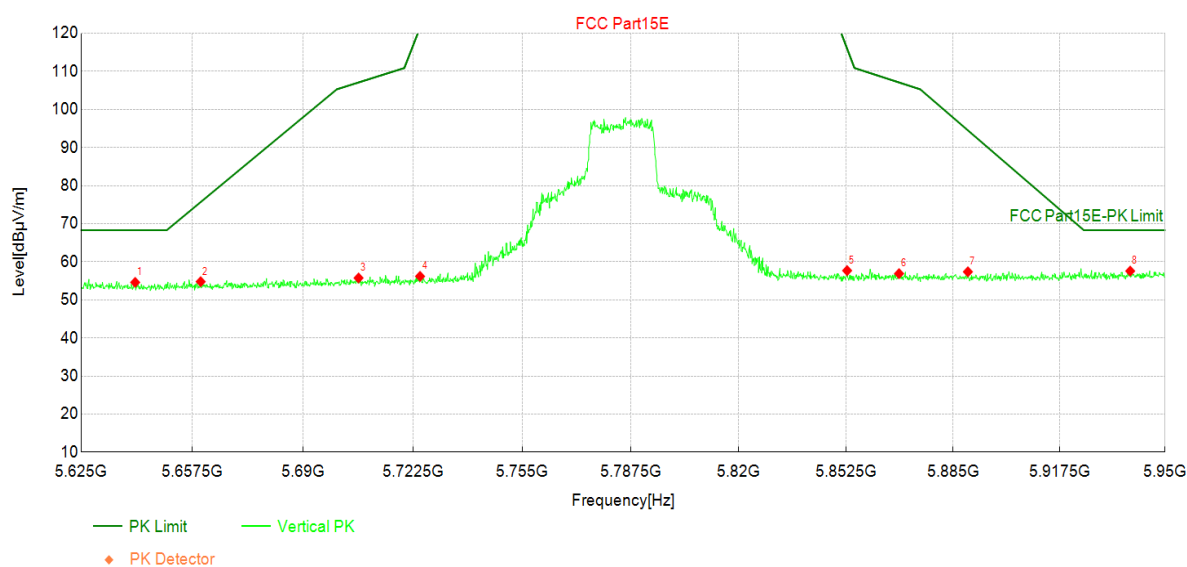

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5641	36.49	54.60	18.11	68.30	13.70	PK	Vertic	PASS
2	5660	36.47	54.78	18.31	75.69	20.91	PK	Vertic	PASS
3	5706	37.06	55.75	18.69	107.11	51.36	PK	Vertic	PASS
4	5725	37.51	56.18	18.67	121.53	65.35	PK	Vertic	PASS
5	5853	38.72	57.68	18.96	115.97	58.29	PK	Vertic	PASS
6	5869	37.80	56.89	19.09	107.10	50.21	PK	Vertic	PASS
7	5890	38.11	57.37	19.26	94.52	37.15	PK	Vertic	PASS
8	5939	37.93	57.57	19.64	68.30	10.73	PK	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 10:Transmit at 5825MHz by 802.11be(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC Part15E		

Test Graph

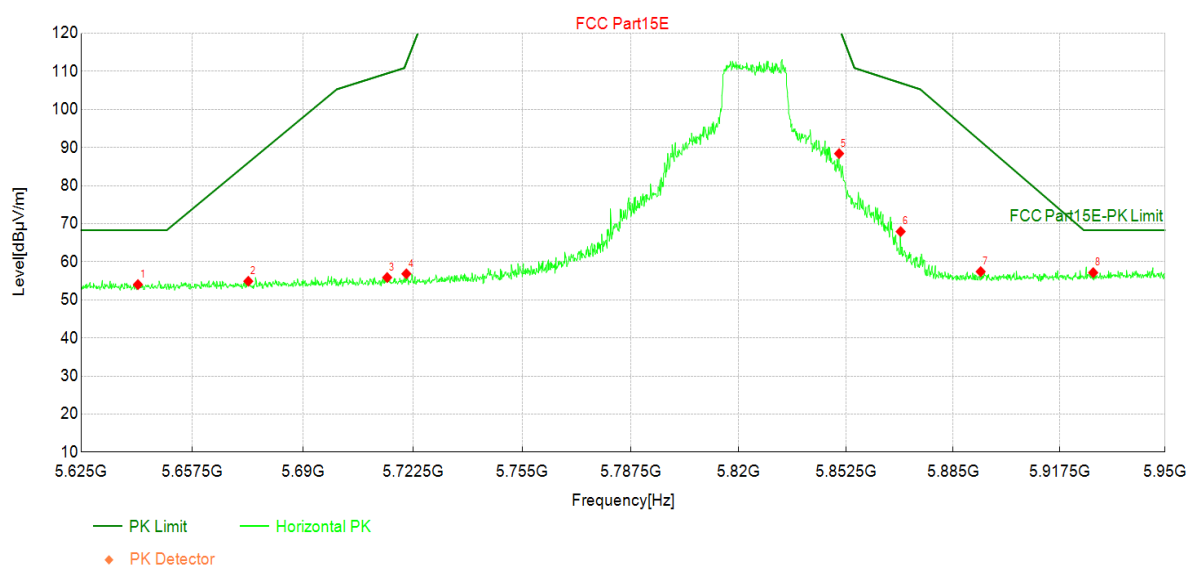

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5642	35.88	54.01	18.13	68.30	14.29	PK	Horizo	PASS
2	5674	36.44	54.89	18.45	86.05	31.16	PK	Horizo	PASS
3	5715	37.19	55.87	18.68	109.48	53.61	PK	Horizo	PASS
4	5721	38.16	56.84	18.68	112.26	55.42	PK	Horizo	PASS
5	5850	69.47	88.42	18.95	121.53	33.11	PK	Horizo	PASS
6	5869	48.85	67.94	19.09	106.97	39.03	PK	Horizo	PASS
7	5893	38.13	57.41	19.28	91.63	34.22	PK	Horizo	PASS
8	5928	37.60	57.15	19.55	68.30	11.15	PK	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 10:Transmit at 5825MHz by 802.11be(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC Part15E		

Test Graph

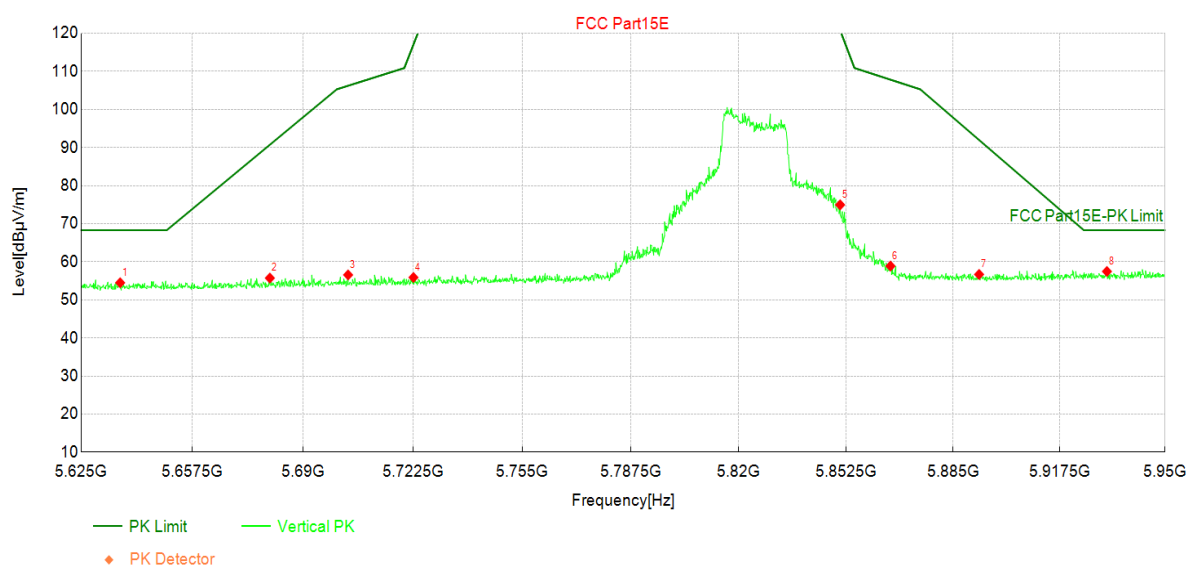

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5636	36.42	54.49	18.07	68.30	13.81	PK	Vertic	PASS
2	5680	37.21	55.72	18.51	90.74	35.02	PK	Vertic	PASS
3	5703	37.84	56.55	18.71	106.24	49.69	PK	Vertic	PASS
4	5723	37.22	55.89	18.67	117.08	61.19	PK	Vertic	PASS
5	5851	56.01	74.96	18.95	120.79	45.83	PK	Vertic	PASS
6	5866	39.81	58.88	19.07	107.83	48.95	PK	Vertic	PASS
7	5893	37.40	56.68	19.28	91.99	35.31	PK	Vertic	PASS
8	5932	37.88	57.46	19.58	68.30	10.84	PK	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 11:Transmit at 5755MHz by 802.11be(40MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC Part15E		

Test Graph

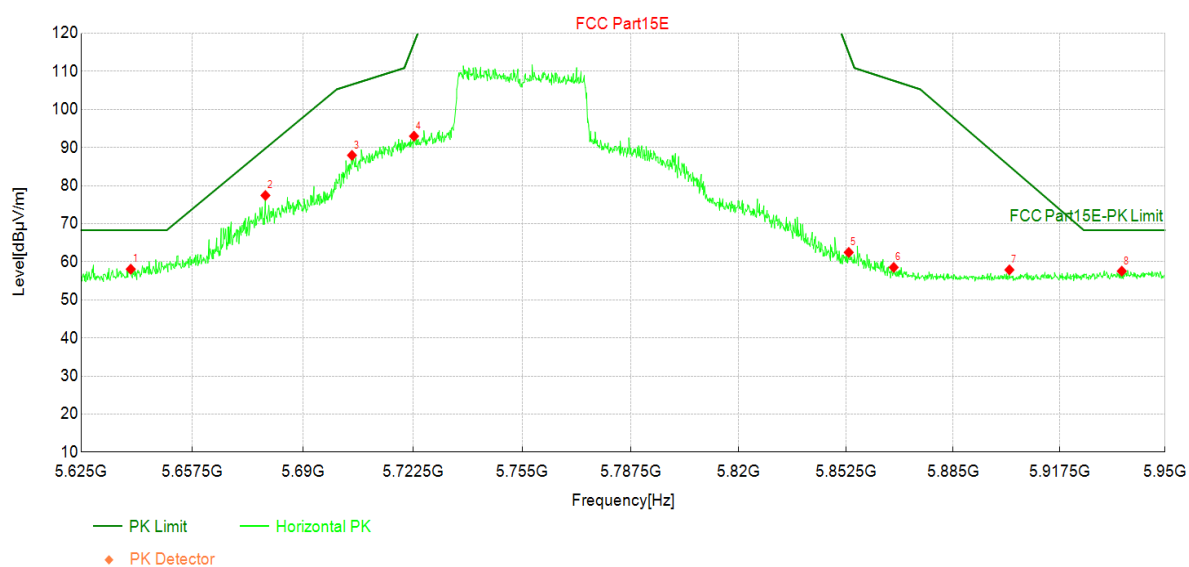

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5639	39.96	58.06	18.10	68.30	10.24	PK	Horizo	PASS
2	5679	58.92	77.42	18.50	89.78	12.36	PK	Horizo	PASS
3	5705	69.26	87.96	18.70	106.56	18.60	PK	Horizo	PASS
4	5723	74.33	93.00	18.67	117.45	24.45	PK	Horizo	PASS
5	5853	43.51	62.47	18.96	114.86	52.39	PK	Horizo	PASS
6	5867	39.47	58.54	19.07	107.56	49.02	PK	Horizo	PASS
7	5902	38.52	57.88	19.36	85.13	27.25	PK	Horizo	PASS
8	5937	37.93	57.54	19.61	68.30	10.76	PK	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 11:Transmit at 5755MHz by 802.11be(40MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC Part15E		

Test Graph

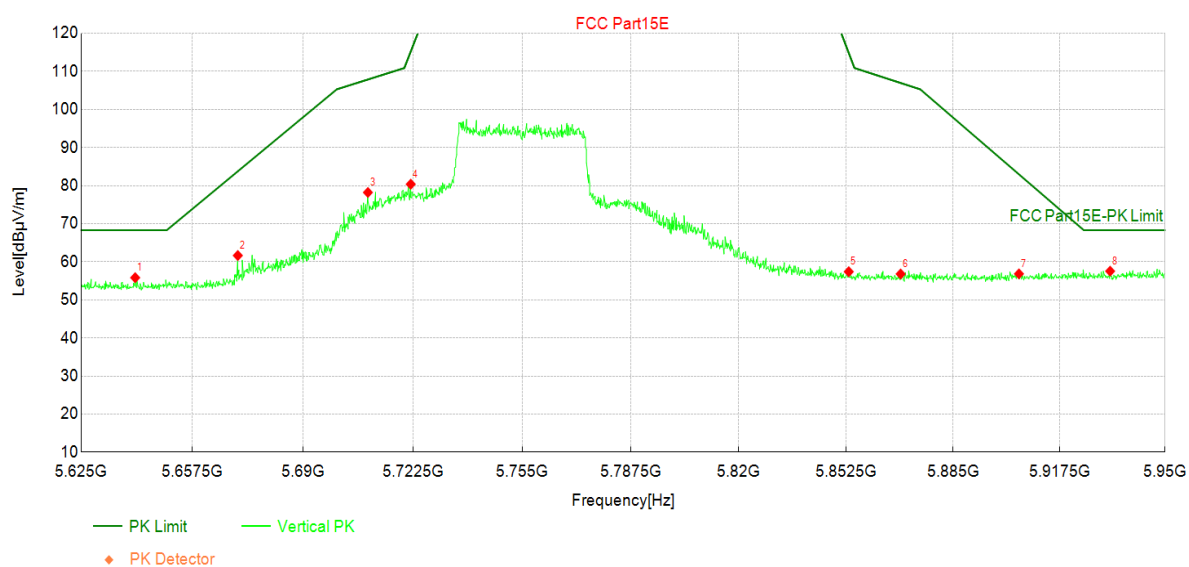

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5641	37.71	55.82	18.11	68.30	12.48	PK	Vertic	PASS
2	5671	43.22	61.64	18.42	83.77	22.13	PK	Vertic	PASS
3	5709	59.52	78.21	18.69	107.88	29.67	PK	Vertic	PASS
4	5722	61.71	80.38	18.67	115.23	34.85	PK	Vertic	PASS
5	5853	38.44	57.40	18.96	114.86	57.46	PK	Vertic	PASS
6	5869	37.71	56.80	19.09	106.97	50.17	PK	Vertic	PASS
7	5905	37.45	56.83	19.38	82.97	26.14	PK	Vertic	PASS
8	5933	37.94	57.54	19.60	68.30	10.76	PK	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 11:Transmit at 5795MHz by 802.11be(40MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC Part15E		

Test Graph

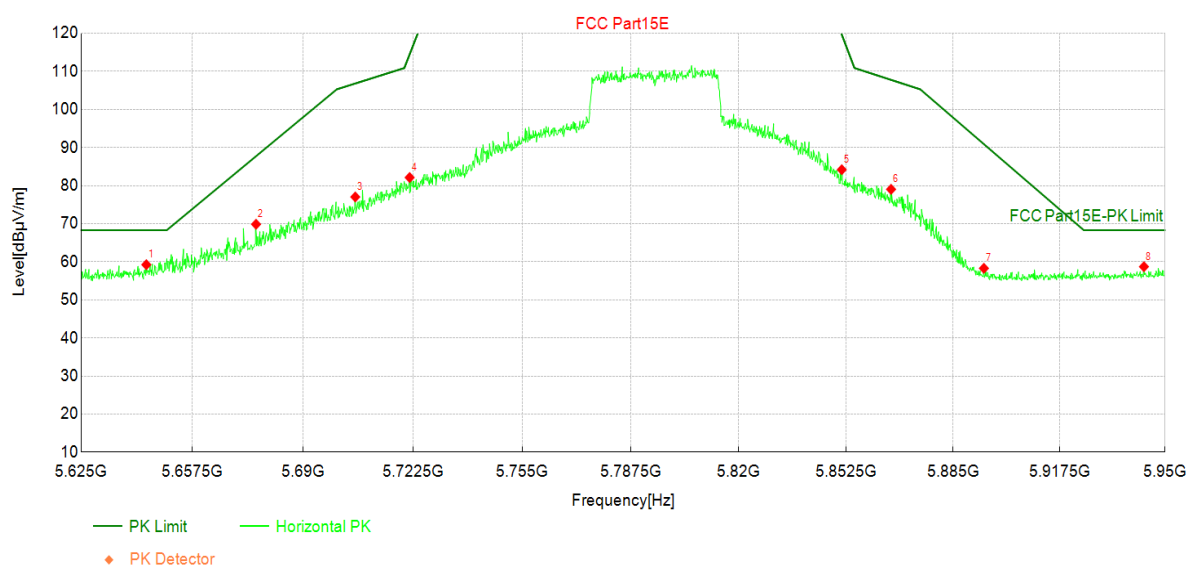

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5644	41.09	59.24	18.15	68.30	9.06	PK	Horizo	PASS
2	5676	51.38	69.86	18.48	87.74	17.88	PK	Horizo	PASS
3	5705	58.33	77.03	18.70	106.84	29.81	PK	Horizo	PASS
4	5722	63.47	82.14	18.67	114.49	32.35	PK	Horizo	PASS
5	5851	65.24	84.19	18.95	119.68	35.49	PK	Horizo	PASS
6	5866	59.97	79.04	19.07	107.79	28.75	PK	Horizo	PASS
7	5894	38.99	58.29	19.30	90.91	32.62	PK	Horizo	PASS
8	5943	39.04	58.71	19.67	68.30	9.59	PK	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 11:Transmit at 5795MHz by 802.11be(40MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC Part15E		

Test Graph

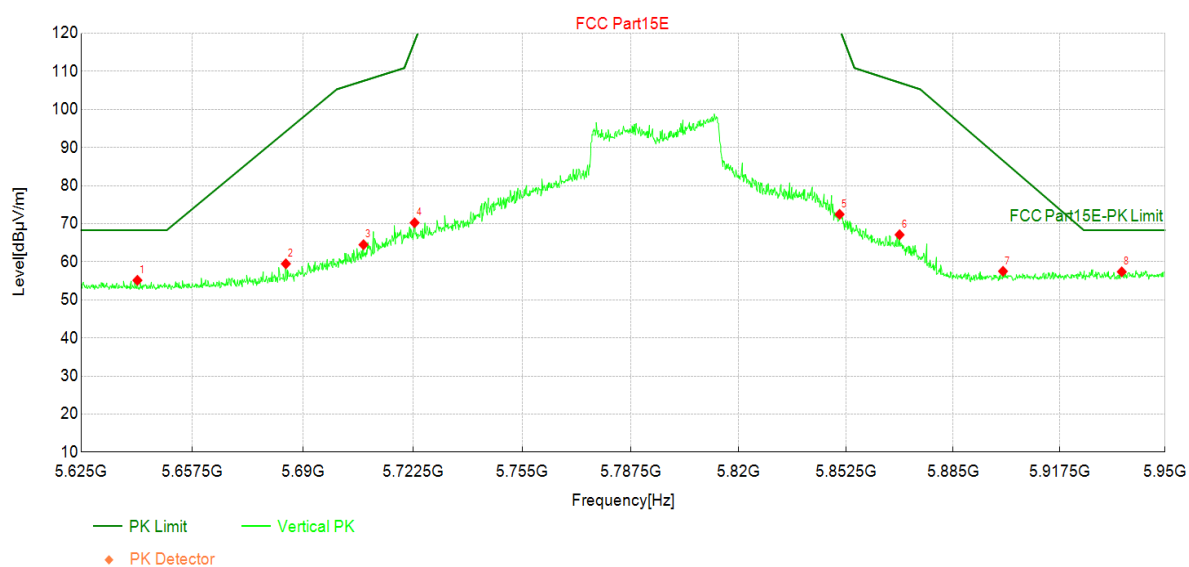

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5641	37.01	55.14	18.13	68.30	13.16	PK	Vertic	PASS
2	5685	40.91	59.47	18.56	94.23	34.76	PK	Vertic	PASS
3	5708	45.78	64.48	18.70	107.52	43.04	PK	Vertic	PASS
4	5723	51.59	70.26	18.67	117.82	47.56	PK	Vertic	PASS
5	5851	53.52	72.47	18.95	121.16	48.69	PK	Vertic	PASS
6	5869	48.01	67.10	19.09	107.06	39.96	PK	Vertic	PASS
7	5900	38.17	57.51	19.34	86.58	29.07	PK	Vertic	PASS
8	5937	37.75	57.36	19.61	68.30	10.94	PK	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 12:Transmit at 5775MHz by 802.11be(80MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC Part15E		

Test Graph

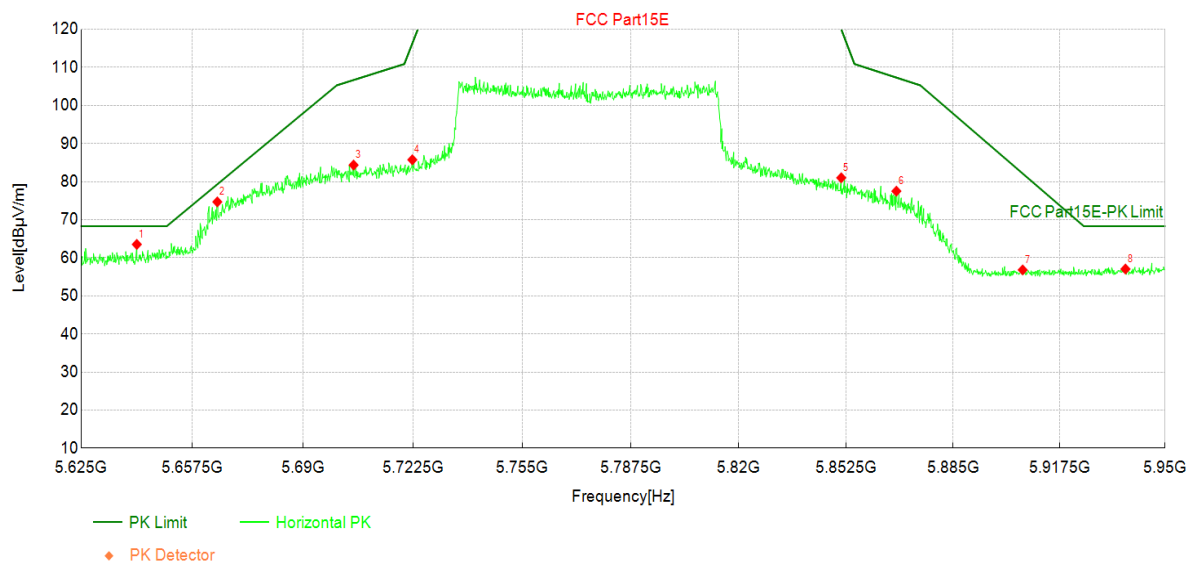

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5641	45.40	63.52	18.12	68.30	4.78	PK	Horizo	PASS
2	5665	56.32	74.68	18.36	79.31	4.63	PK	Horizo	PASS
3	5705	65.66	84.36	18.70	106.70	22.34	PK	Horizo	PASS
4	5722	67.08	85.75	18.67	116.34	30.59	PK	Horizo	PASS
5	5851	62.07	81.02	18.95	120.05	39.03	PK	Horizo	PASS
6	5868	58.41	77.50	19.09	107.33	29.83	PK	Horizo	PASS
7	5906	37.44	56.82	19.38	82.13	25.31	PK	Horizo	PASS
8	5938	37.42	57.05	19.63	68.30	11.25	PK	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 12:Transmit at 5775MHz by 802.11be(80MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC Part15E		

Test Graph

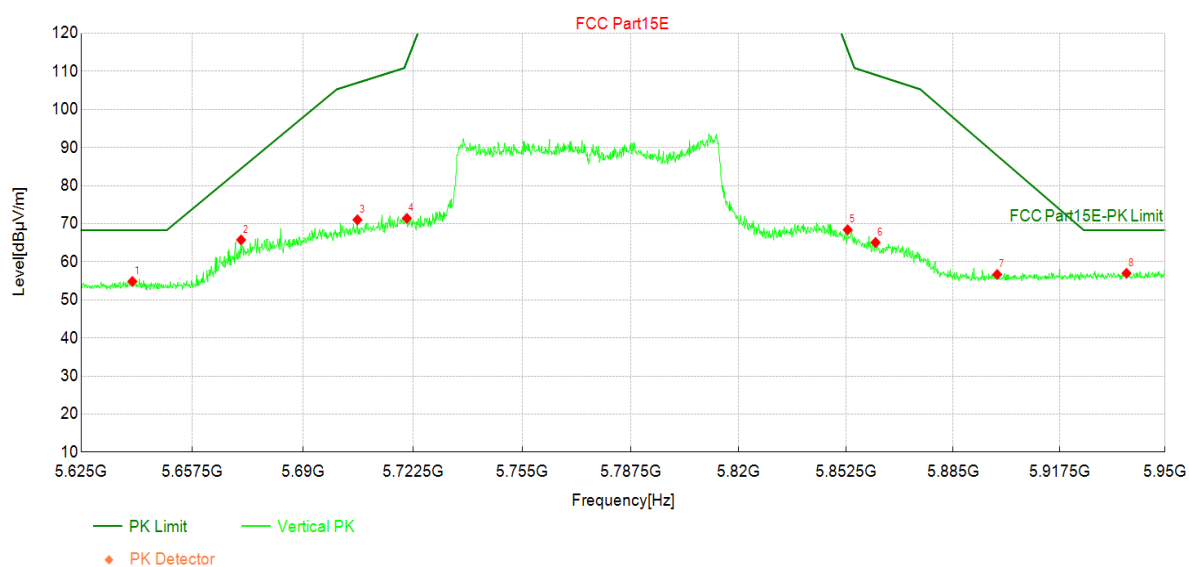

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5640	36.73	54.84	18.11	68.30	13.46	PK	Vertic	PASS
2	5672	47.32	65.75	18.43	84.49	18.74	PK	Vertic	PASS
3	5706	52.34	71.04	18.70	107.02	35.98	PK	Vertic	PASS
4	5721	52.75	71.43	18.68	112.63	41.20	PK	Vertic	PASS
5	5853	49.45	68.41	18.96	115.60	47.19	PK	Vertic	PASS
6	5861	46.04	65.07	19.03	109.11	44.04	PK	Vertic	PASS
7	5898	37.34	56.67	19.33	87.90	31.23	PK	Vertic	PASS
8	5938	37.36	56.99	19.63	68.30	11.31	PK	Vertic	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

CDD:**Test Report****Project Information**

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 1:Transmit at 5180MHz by 802.11a(20MHz)	Voltage:	120Vac/60Hz
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	Part 15E		

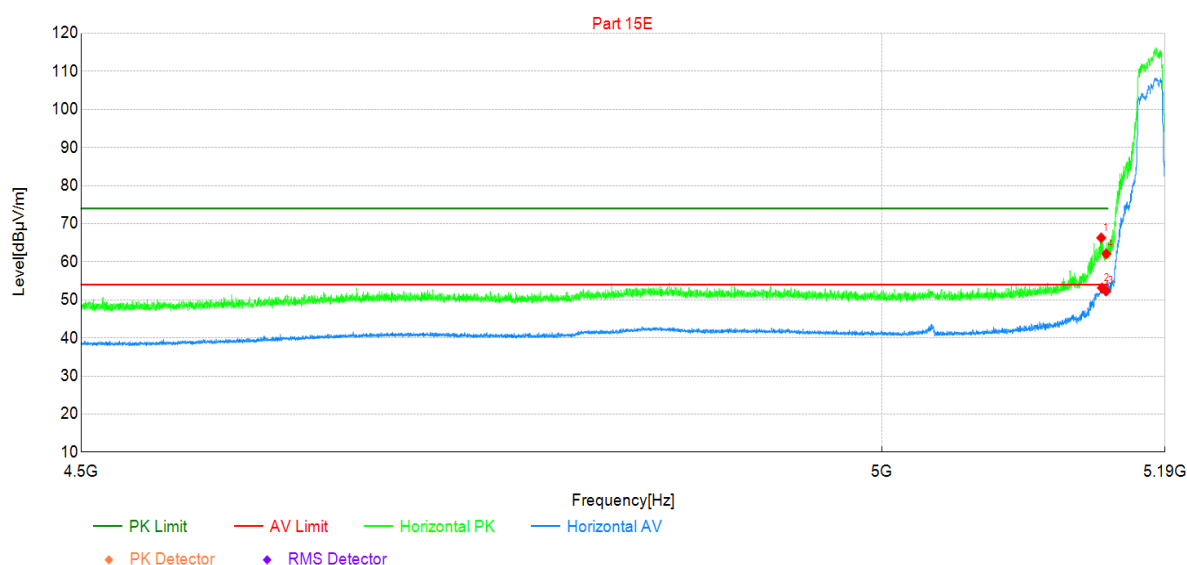
Test Graph**Suspected Data List**

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5147	51.19	66.28	15.09	74.00	7.72	PK	Horizo	PASS
2	5147	38.05	53.14	15.09	54.00	0.86	AV	Horizo	PASS
3	5150	37.20	52.31	15.11	54.00	1.69	AV	Horizo	PASS
4	5150	46.97	62.08	15.11	74.00	11.92	PK	Horizo	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level


Test Report

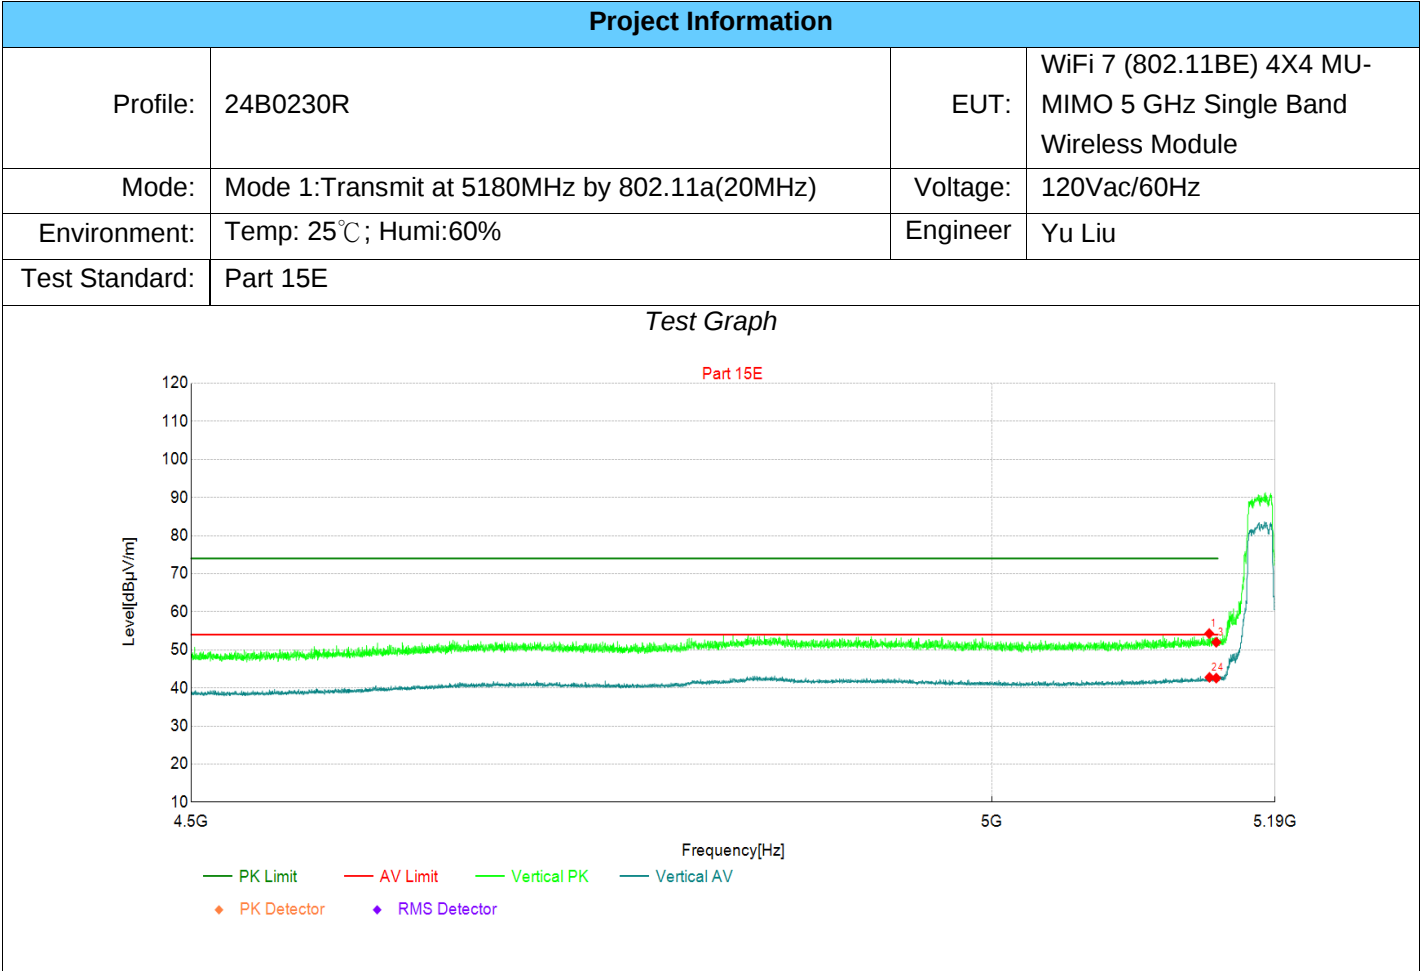

Suspected Data List									
NO	Frequency [MHz]	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Det	Pol	Verdict
1	5145	39.20	54.28	15.08	74.00	19.72	PK	Vertic	PASS
2	5145	27.69	42.77	15.08	54.00	11.23	AV	Vertic	PASS
3	5150	36.88	51.99	15.11	74.00	22.01	PK	Vertic	PASS
4	5150	27.47	42.58	15.11	54.00	11.42	AV	Vertic	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level

Test Report

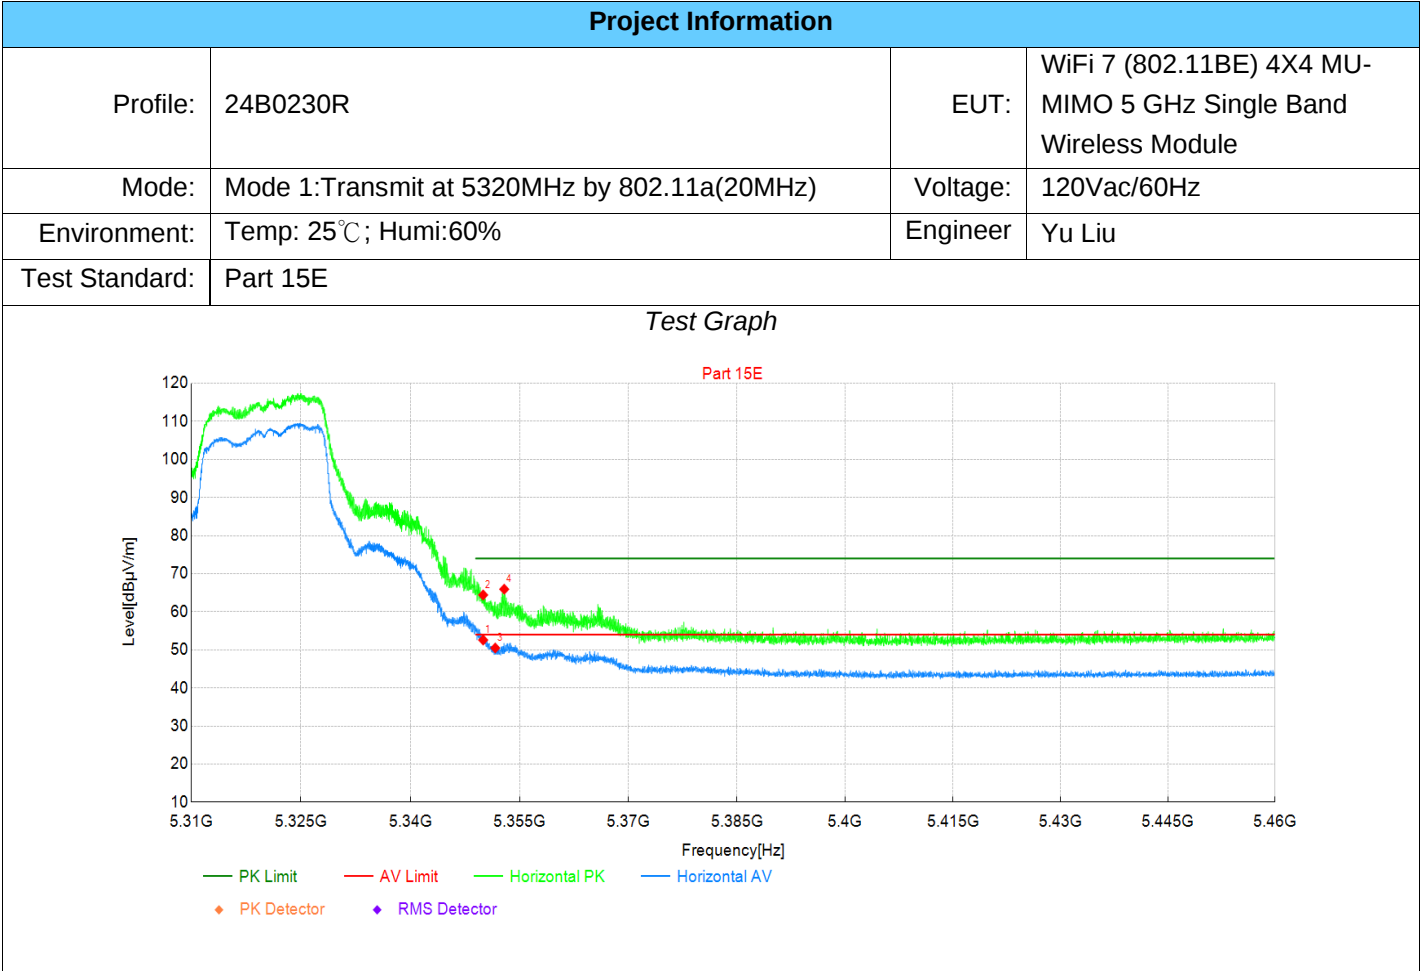

Suspected Data List									
NO	Frequency [MHz]	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Det	Pol	Verdict
1	5350	36.89	52.60	15.71	54.00	1.40	AV	Horizo	PASS
2	5350	48.70	64.41	15.71	74.00	9.59	PK	Horizo	PASS
3	5352	34.78	50.49	15.71	54.00	3.51	AV	Horizo	PASS
4	5353	50.22	65.93	15.71	74.00	8.07	PK	Horizo	PASS


Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level

Test Report

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 1:Transmit at 5320MHz by 802.11a(20MHz)	Voltage:	120Vac/60Hz
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	Part 15E		

Test Graph

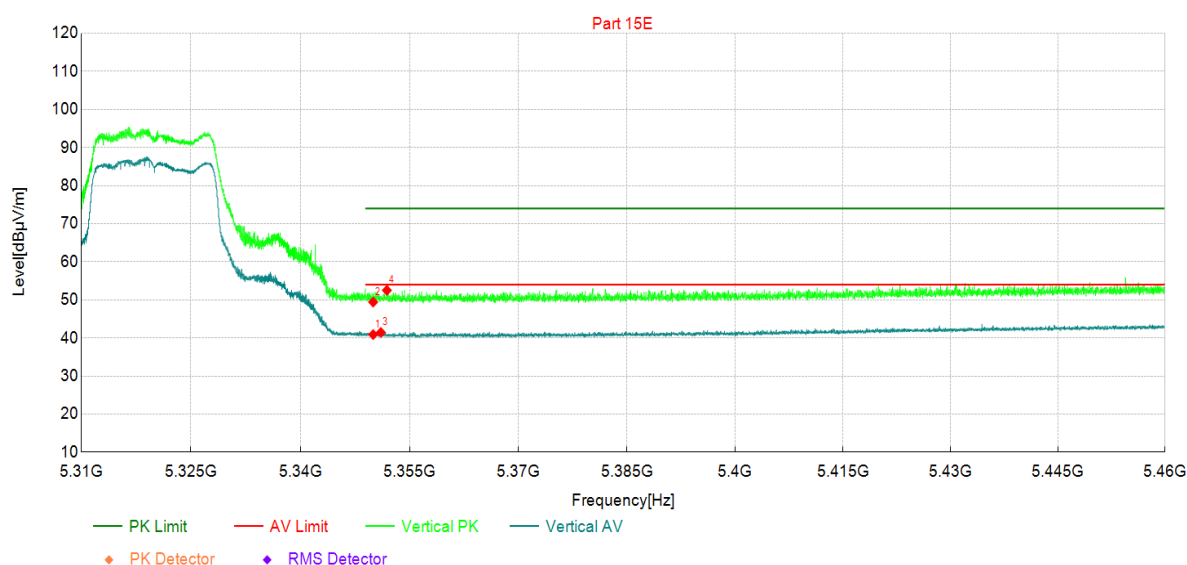


Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5350	25.18	40.89	15.71	54.00	13.11	AV	Vertic	PASS
2	5350	33.72	49.43	15.71	74.00	24.57	PK	Vertic	PASS
3	5351	25.73	41.44	15.71	54.00	12.56	AV	Vertic	PASS
4	5352	36.80	52.51	15.71	74.00	21.49	PK	Vertic	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level


Test Report

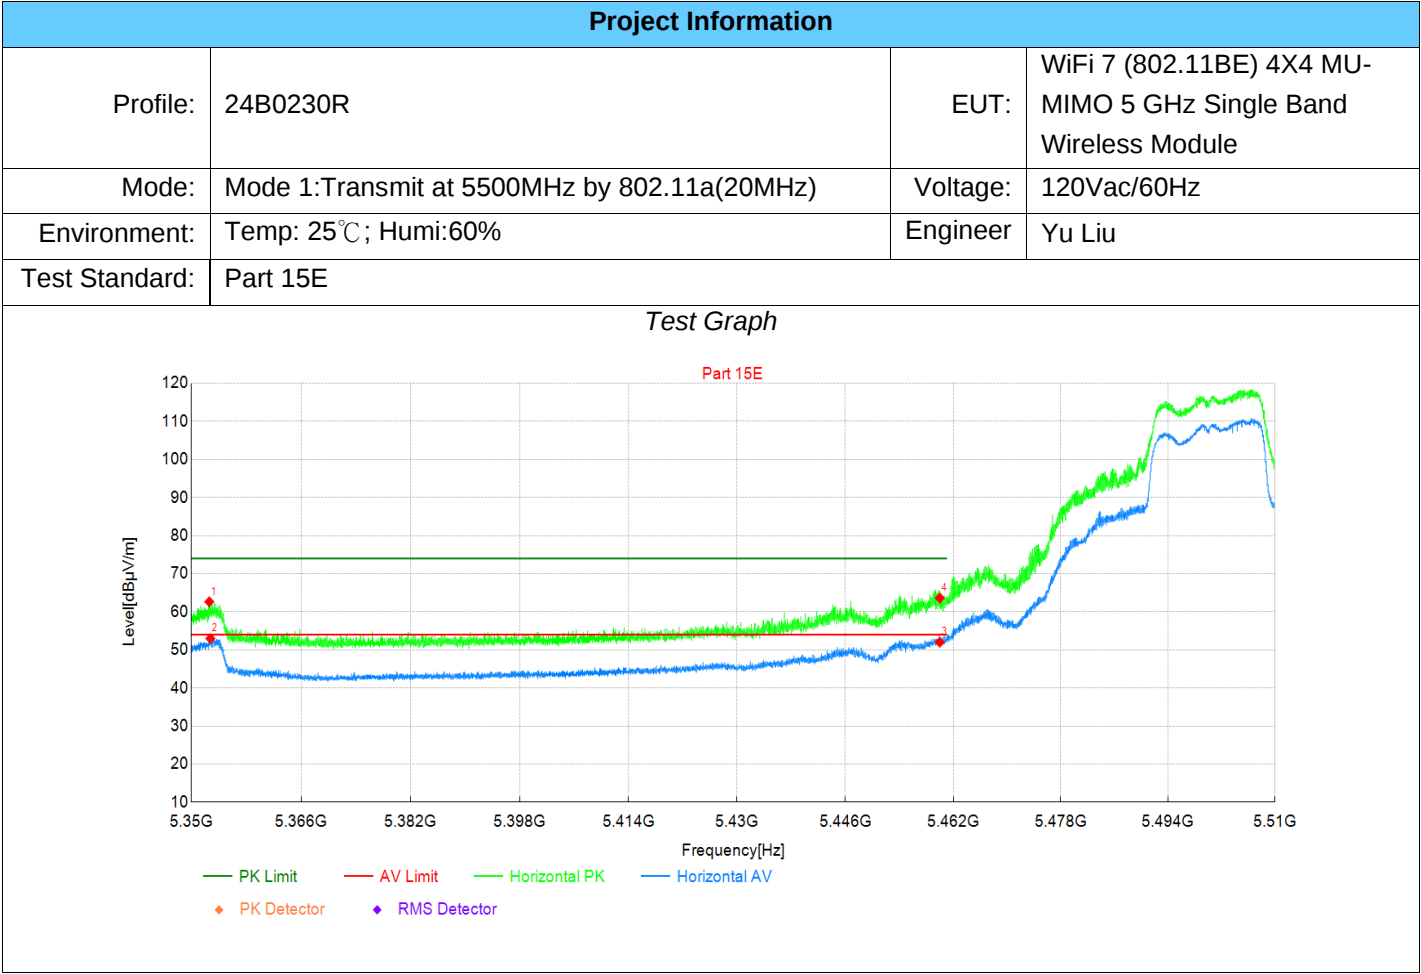

Suspected Data List									
NO	Frequency [MHz]	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Det	Pol	Verdict
1	5353	46.92	62.63	15.71	74.00	11.37	PK	Horizo	PASS
2	5353	37.27	52.98	15.71	54.00	1.02	AV	Horizo	PASS
3	5460	35.69	52.03	16.34	54.00	1.97	AV	Horizo	PASS
4	5460	47.27	63.61	16.34	74.00	10.39	PK	Horizo	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level

Test Report

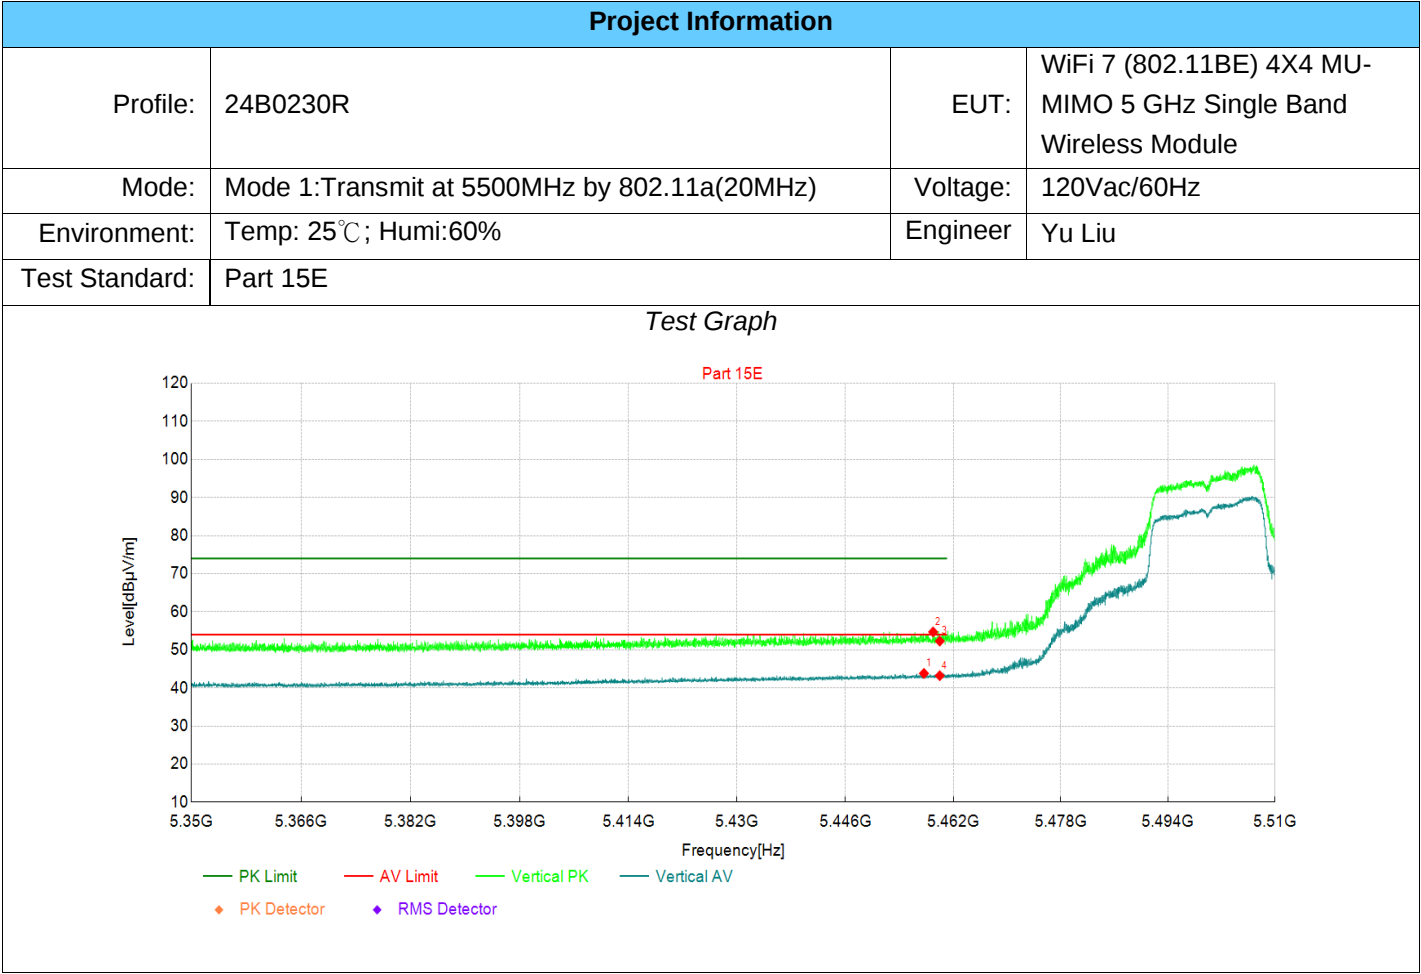

Suspected Data List									
NO	Frequency [MHz]	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Det	Pol	Verdict
1	5458	27.50	43.81	16.31	54.00	10.19	AV	Vertic	PASS
2	5459	38.38	54.71	16.33	74.00	19.29	PK	Vertic	PASS
3	5460	35.95	52.29	16.34	74.00	21.71	PK	Vertic	PASS
4	5460	26.88	43.22	16.34	54.00	10.78	AV	Vertic	PASS


Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level

Test Report

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 2:Transmit at 5180MHz by 802.11n(20MHz)	Voltage:	120Vac/60Hz
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	Part 15E		

Test Graph

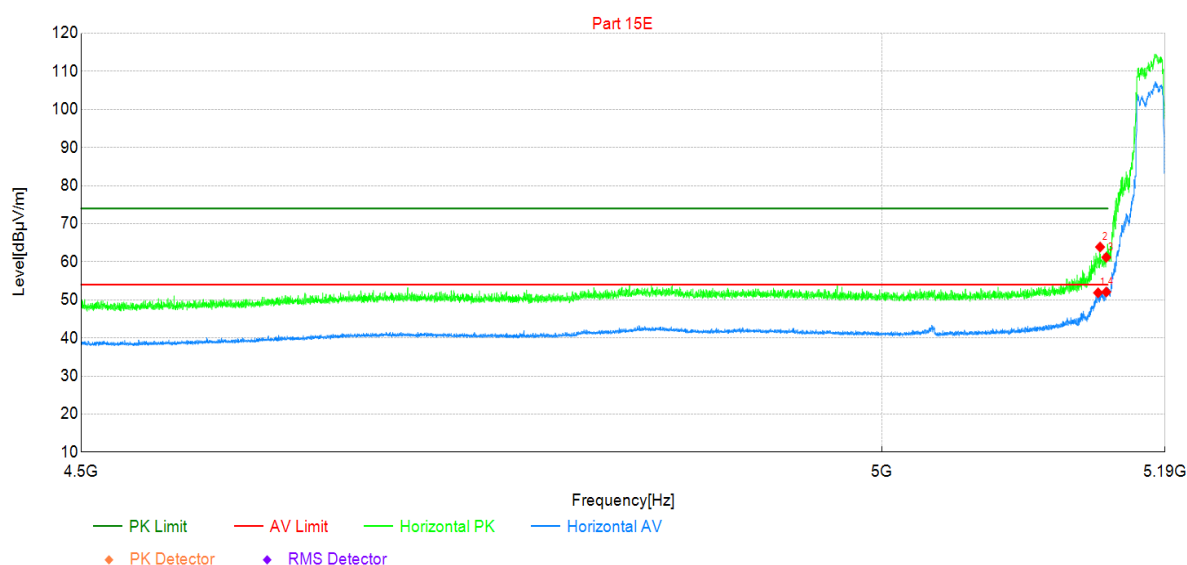

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5144	36.78	51.86	15.08	54.00	2.14	AV	Horizo	PASS
2	5146	48.79	63.88	15.09	74.00	10.12	PK	Horizo	PASS
3	5150	46.06	61.17	15.11	74.00	12.83	PK	Horizo	PASS
4	5150	36.95	52.06	15.11	54.00	1.94	AV	Horizo	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

Test Report

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 2:Transmit at 5180MHz by 802.11n(20MHz)	Voltage:	120Vac/60Hz
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	Part 15E		

Test Graph

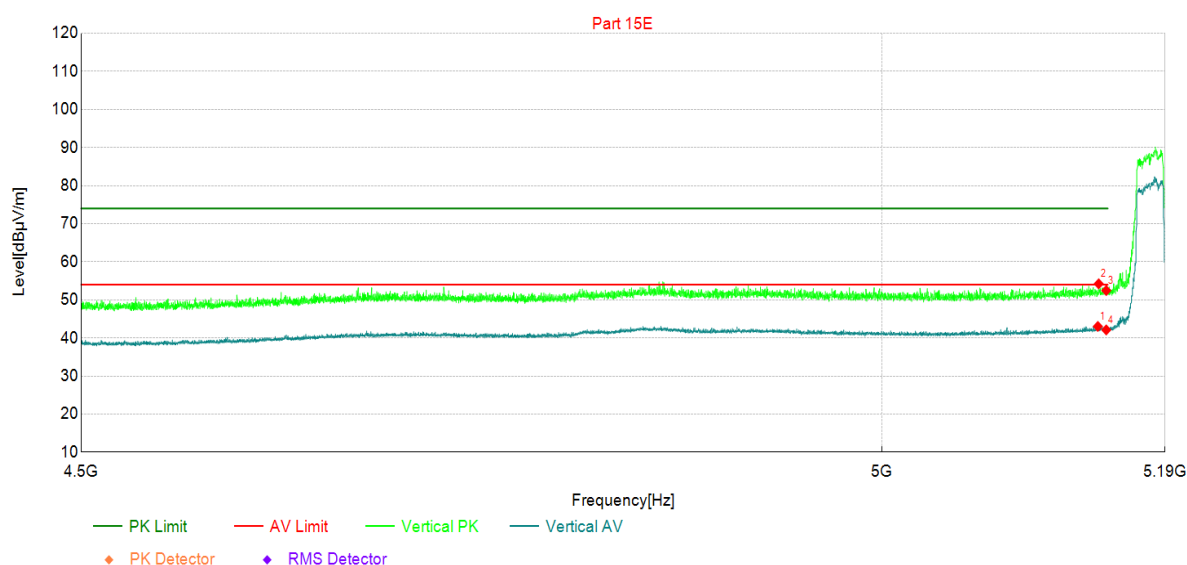

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5144	27.95	43.03	15.08	54.00	10.97	AV	Vertic	PASS
2	5145	39.14	54.22	15.08	74.00	19.78	PK	Vertic	PASS
3	5150	37.34	52.45	15.11	74.00	21.55	PK	Vertic	PASS
4	5150	27.00	42.11	15.11	54.00	11.89	AV	Vertic	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

Test Report

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 2:Transmit at 5320MHz by 802.11n(20MHz)	Voltage:	120Vac/60Hz
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	Part 15E		

Test Graph

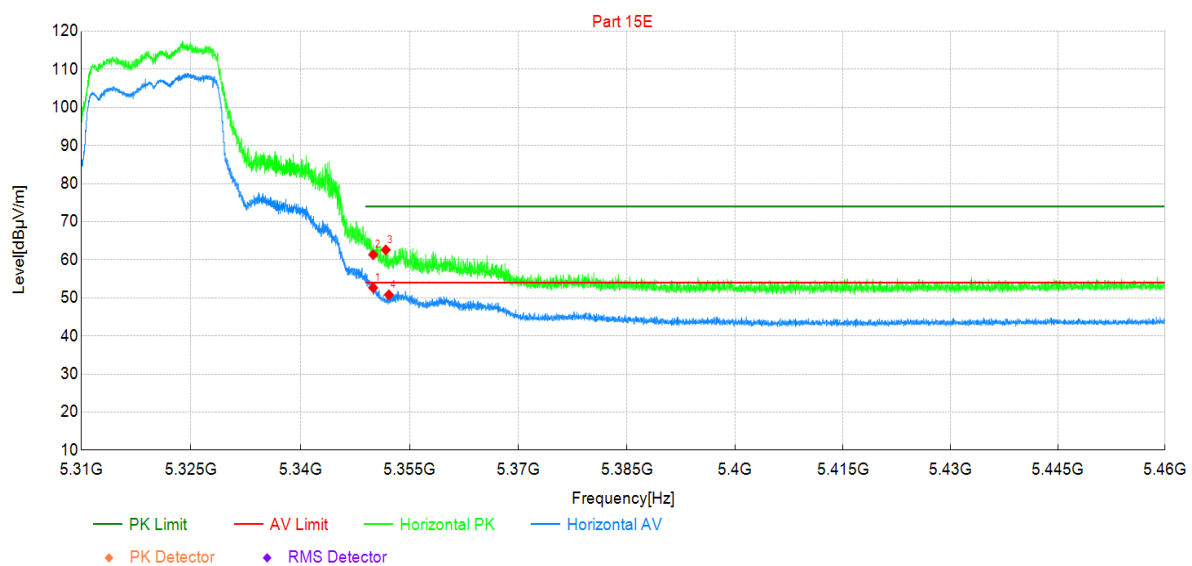


Suspected Data List

NO	Frequency [MHz]	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Det	Pol	Verdict
1	5350	36.94	52.65	15.71	54.00	1.35	AV	Horizo	PASS
2	5350	45.63	61.34	15.71	74.00	12.66	PK	Horizo	PASS
3	5352	46.89	62.60	15.71	74.00	11.40	PK	Horizo	PASS
4	5352	35.09	50.80	15.71	54.00	3.20	AV	Horizo	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level


Test Report

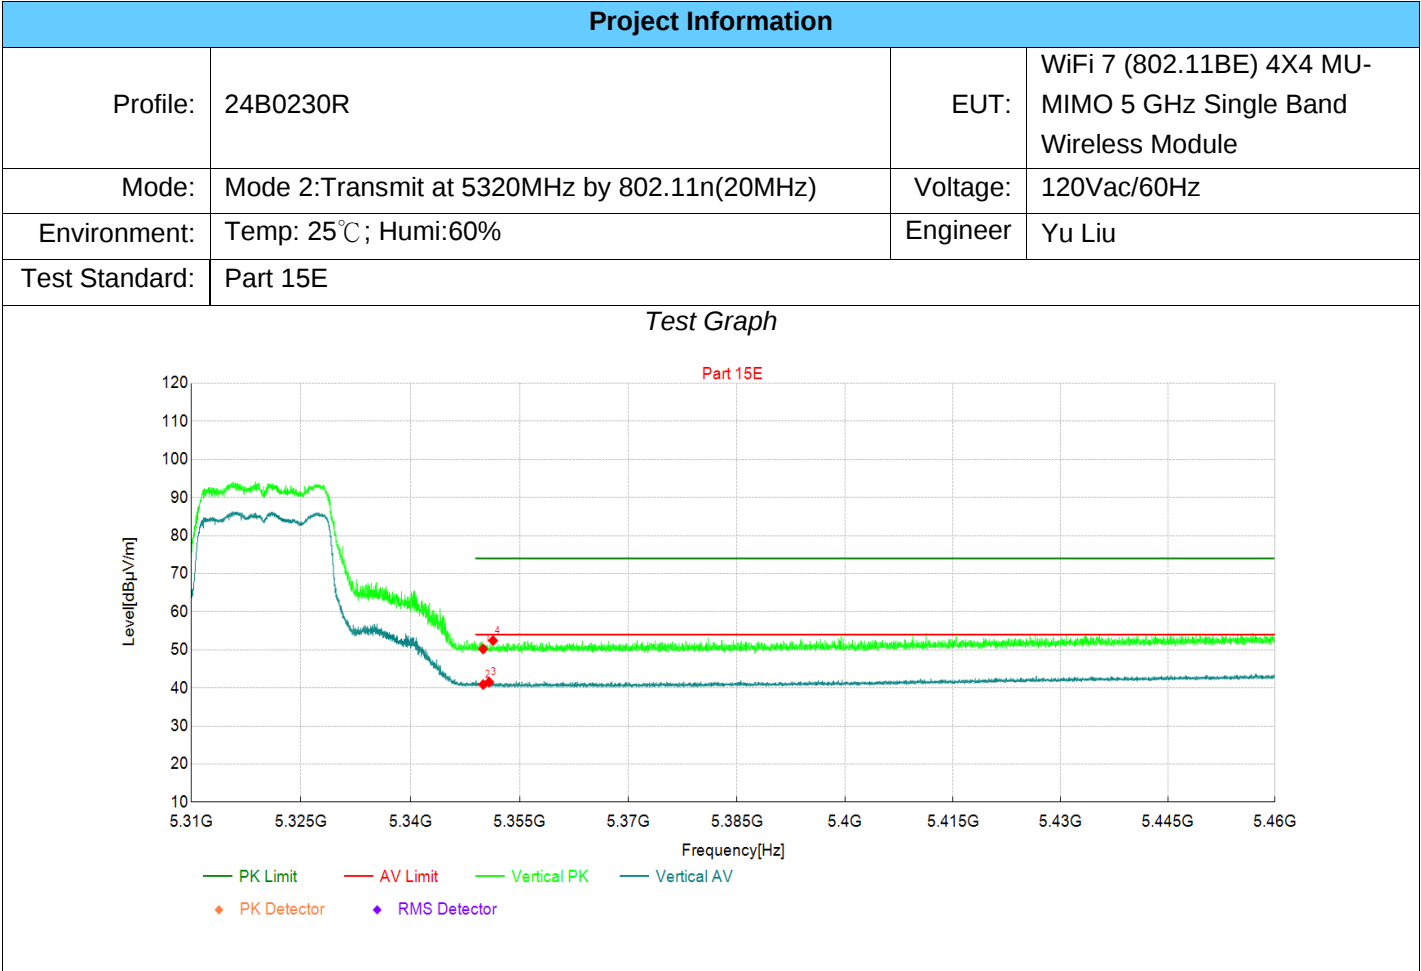

Suspected Data List									
NO	Frequency [MHz]	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Det	Pol	Verdict
1	5350	34.52	50.23	15.71	74.00	23.77	PK	Vertic	PASS
2	5350	25.17	40.88	15.71	54.00	13.12	AV	Vertic	PASS
3	5351	25.84	41.55	15.71	54.00	12.45	AV	Vertic	PASS
4	5351	36.72	52.43	15.71	74.00	21.57	PK	Vertic	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level


Test Report

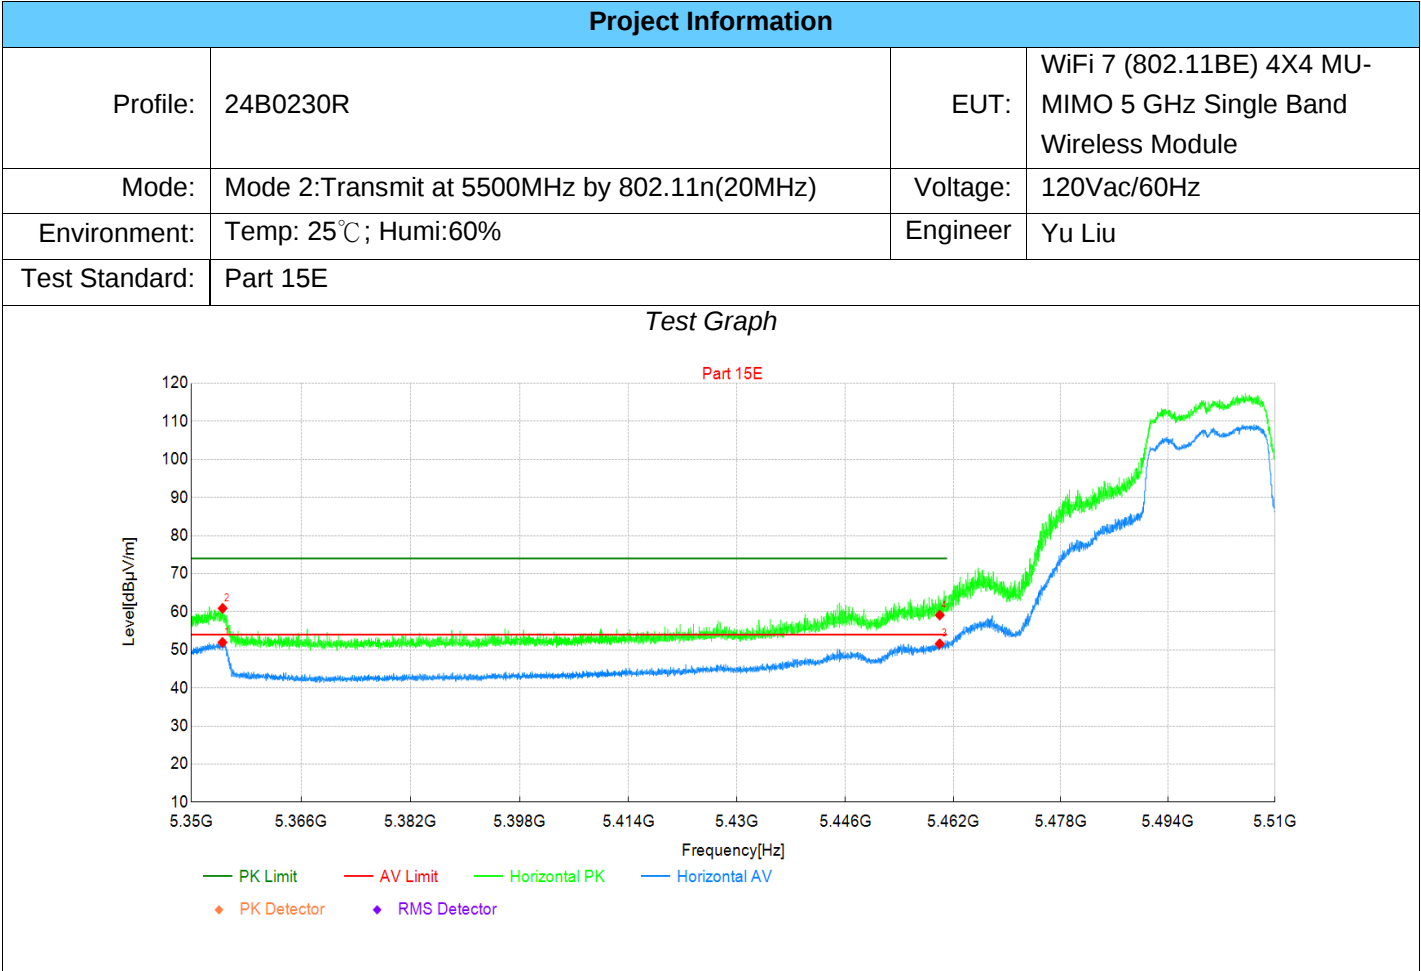

Suspected Data List									
NO	Frequency [MHz]	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Det	Pol	Verdict
1	5355	36.26	51.96	15.70	54.00	2.04	AV	Horizo	PASS
2	5355	45.21	60.91	15.70	74.00	13.09	PK	Horizo	PASS
3	5460	35.25	51.59	16.34	54.00	2.41	AV	Horizo	PASS
4	5460	42.79	59.13	16.34	74.00	14.87	PK	Horizo	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level


Test Report

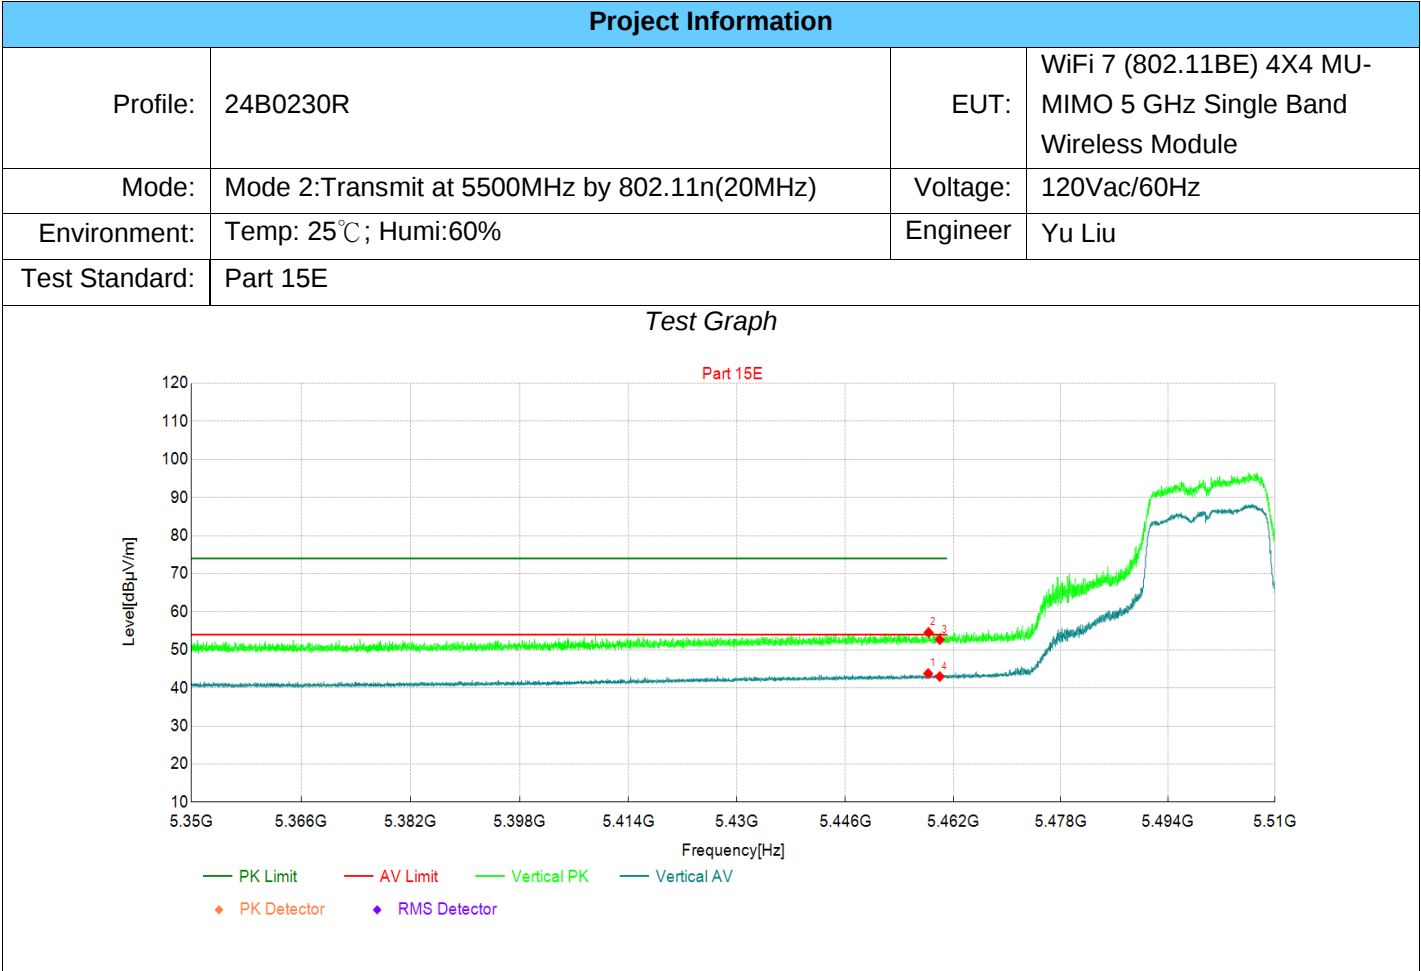

Suspected Data List									
NO	Frequency [MHz]	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Det	Pol	Verdict
1	5458	27.46	43.78	16.32	54.00	10.22	AV	Vertic	PASS
2	5458	38.25	54.57	16.32	74.00	19.43	PK	Vertic	PASS
3	5460	36.33	52.67	16.34	74.00	21.33	PK	Vertic	PASS
4	5460	26.65	42.99	16.34	54.00	11.01	AV	Vertic	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level

Test Report

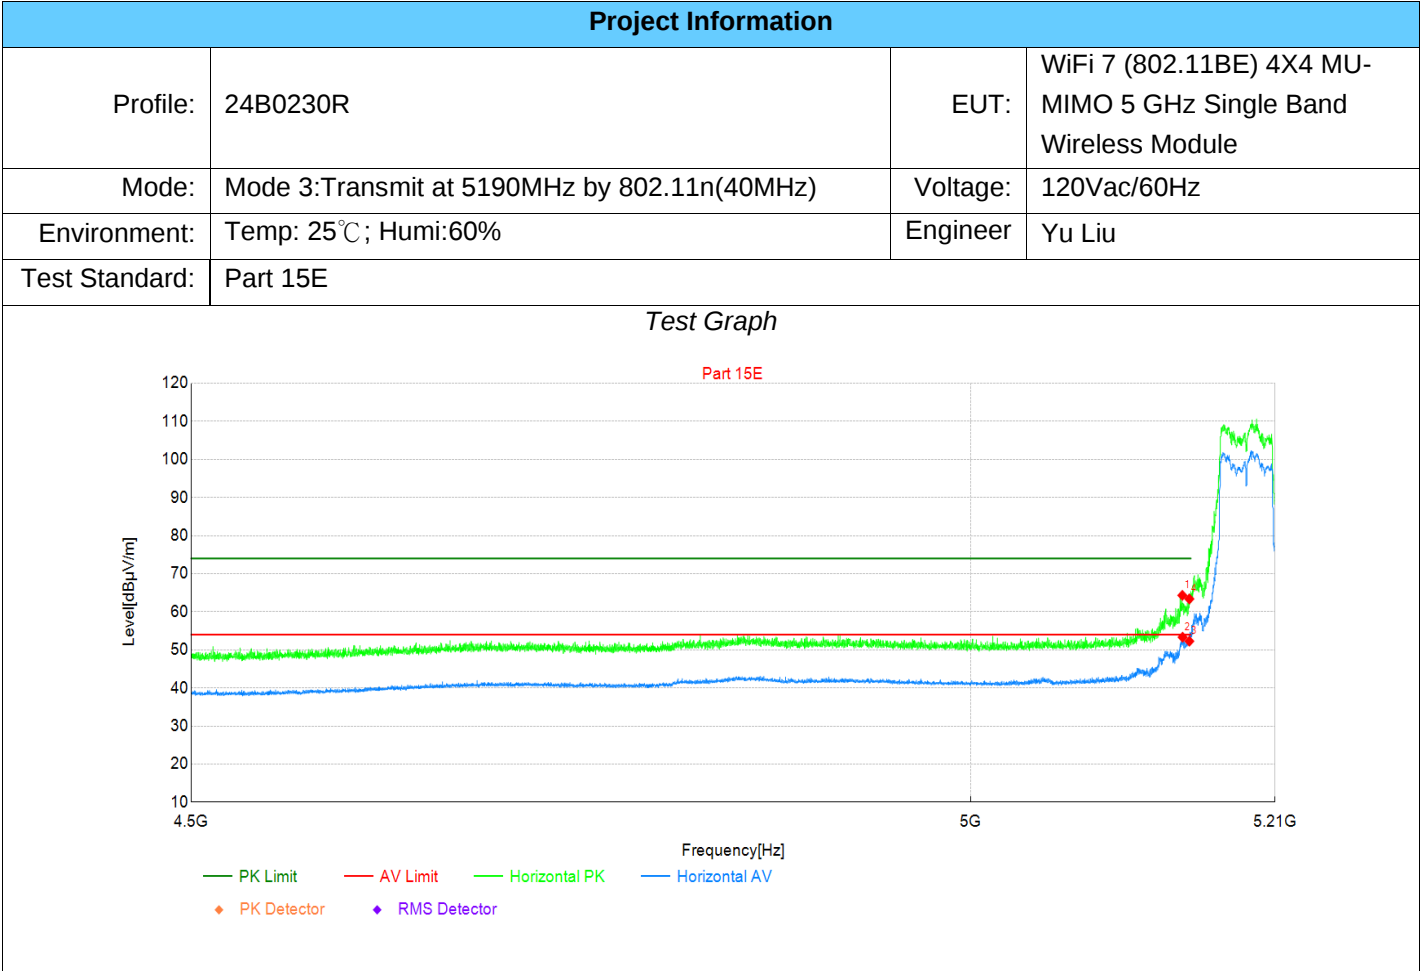

Suspected Data List									
NO	Frequency [MHz]	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Det	Pol	Verdict
1	5145	49.24	64.32	15.08	74.00	9.68	PK	Horizo	PASS
2	5145	38.25	53.33	15.08	54.00	0.67	AV	Horizo	PASS
3	5150	37.16	52.27	15.11	54.00	1.73	AV	Horizo	PASS
4	5150	48.26	63.37	15.11	74.00	10.63	PK	Horizo	PASS


Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level

Test Report

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 3:Transmit at 5190MHz by 802.11n(40MHz)	Voltage:	120Vac/60Hz
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	Part 15E		

Test Graph

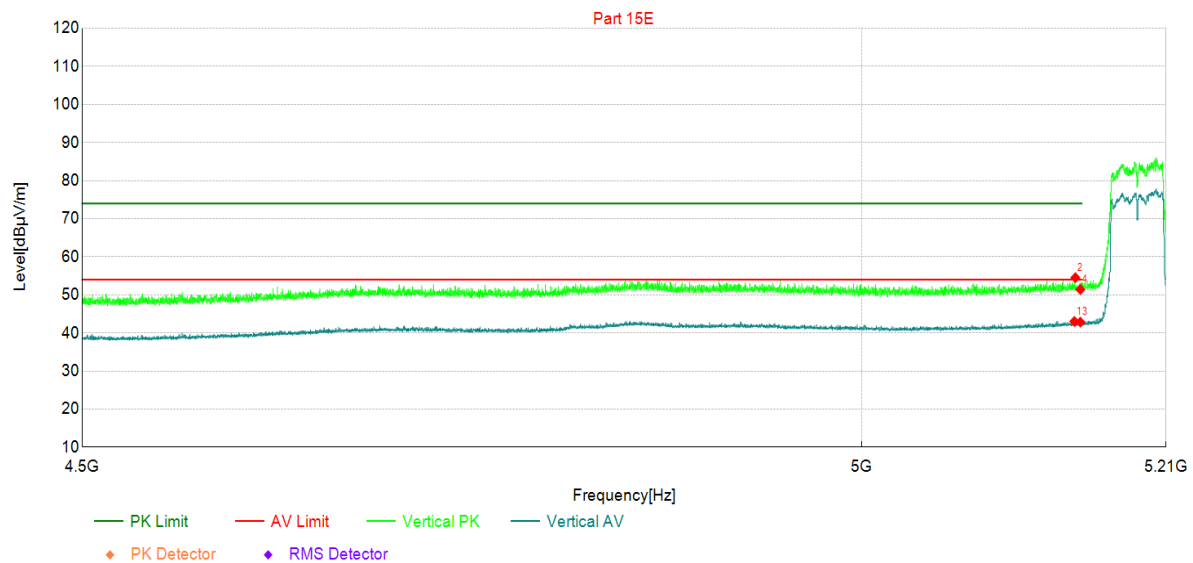


Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5146	27.93	43.02	15.09	54.00	10.98	AV	Vertic	PASS
2	5147	39.43	54.52	15.09	74.00	19.48	PK	Vertic	PASS
3	5150	27.74	42.85	15.11	54.00	11.15	AV	Vertic	PASS
4	5150	36.29	51.40	15.11	74.00	22.60	PK	Vertic	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level


Test Report

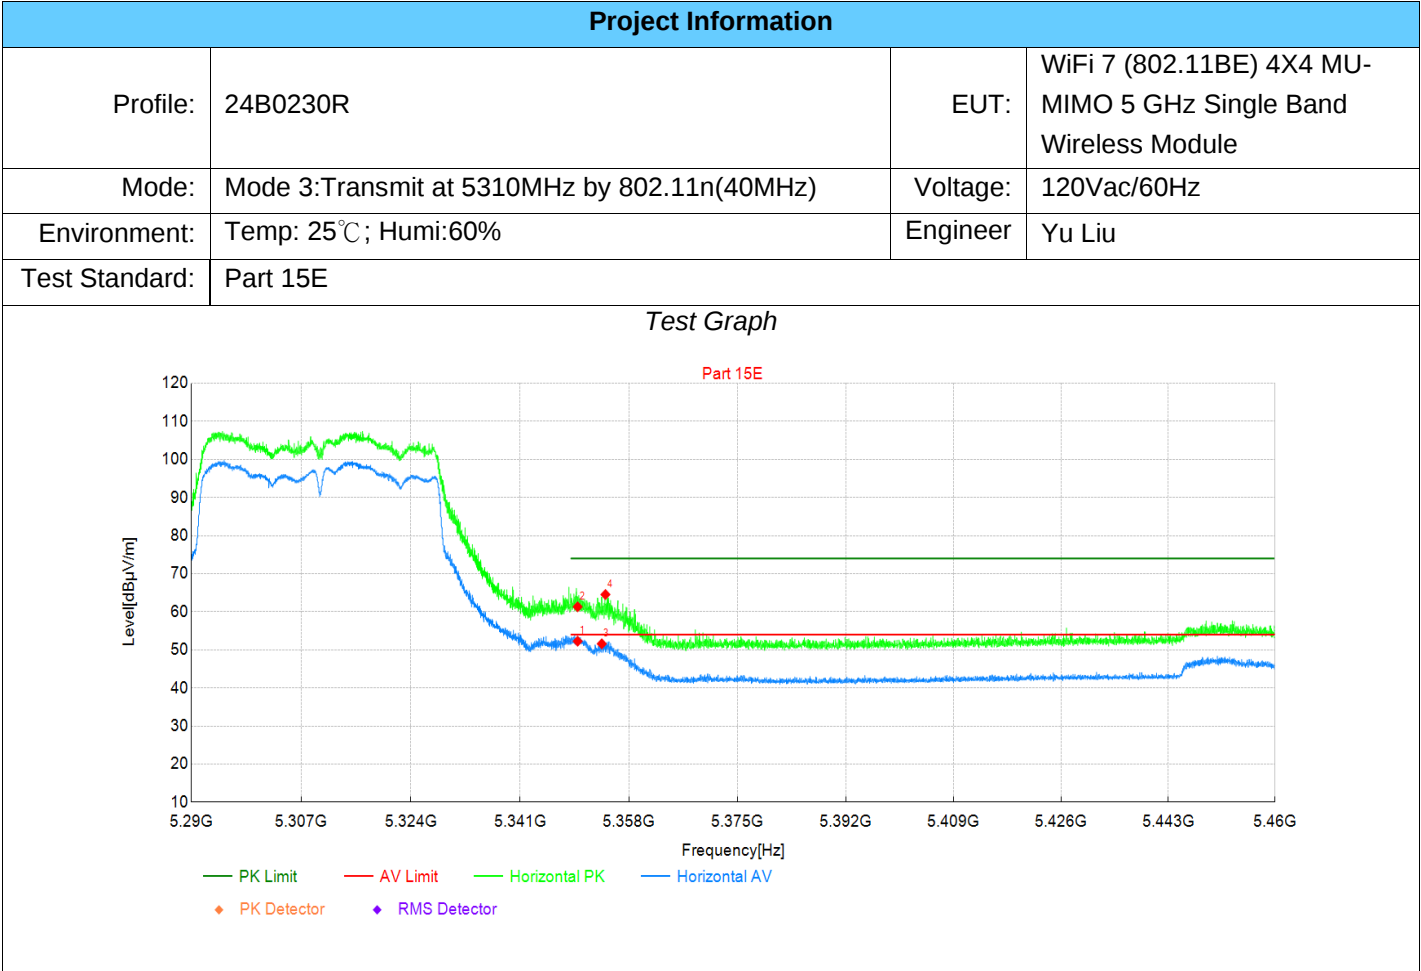

Suspected Data List									
NO	Frequency [MHz]	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Det	Pol	Verdict
1	5350	36.56	52.27	15.71	54.00	1.73	AV	Horizo	PASS
2	5350	45.60	61.31	15.71	74.00	12.69	PK	Horizo	PASS
3	5354	35.89	51.59	15.70	54.00	2.41	AV	Horizo	PASS
4	5354	48.84	64.54	15.70	74.00	9.46	PK	Horizo	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level


Test Report

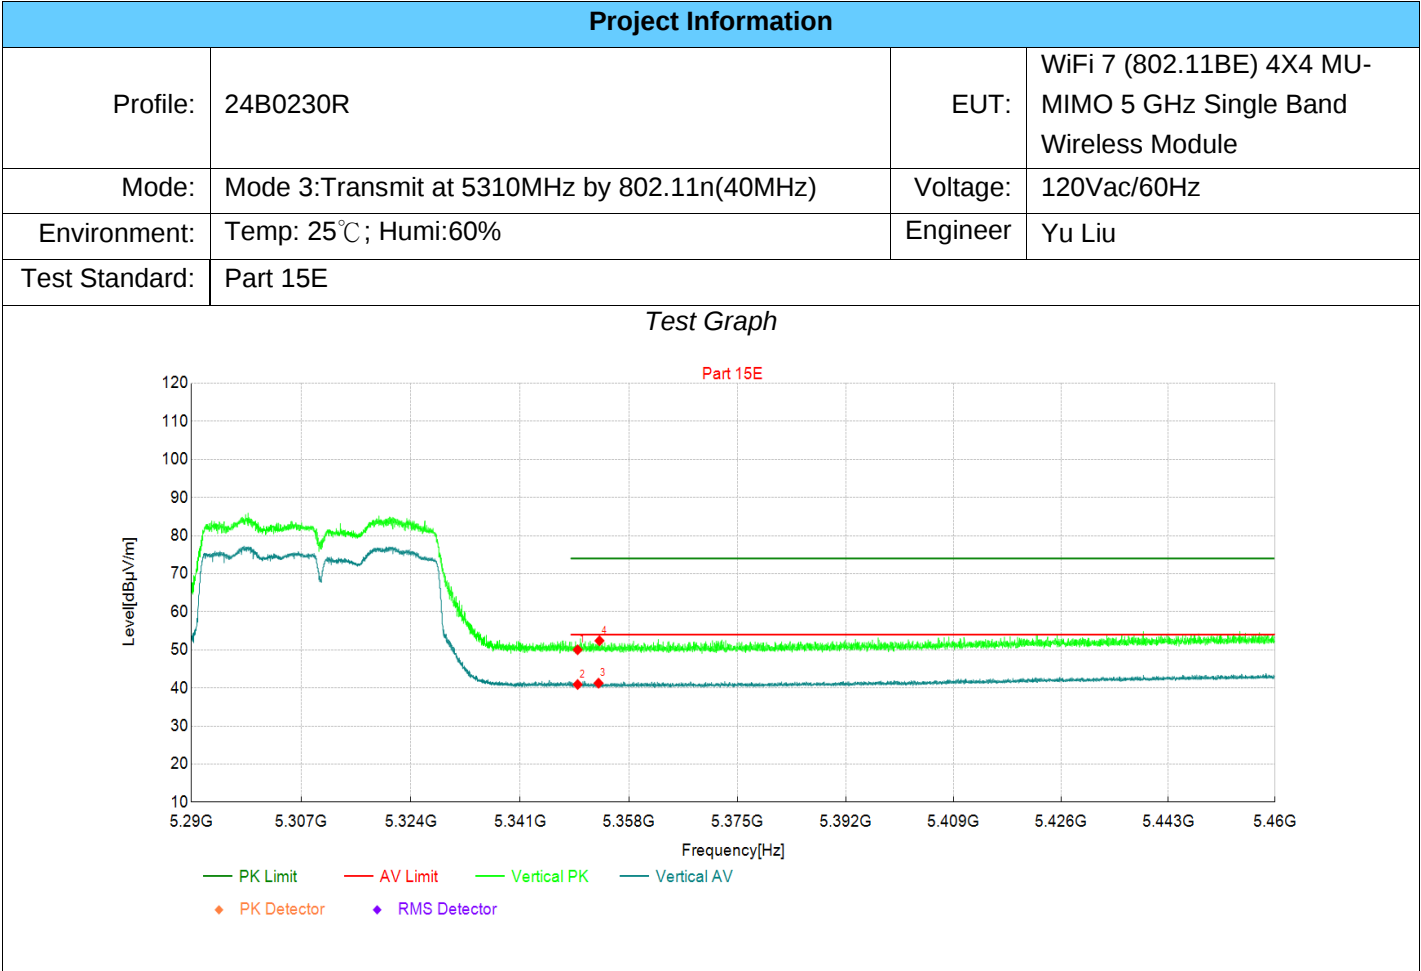

Suspected Data List									
NO	Frequency [MHz]	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Det	Pol	Verdict
1	5350	34.31	50.02	15.71	74.00	23.98	PK	Vertic	PASS
2	5350	25.19	40.90	15.71	54.00	13.10	AV	Vertic	PASS
3	5353	25.53	41.24	15.71	54.00	12.76	AV	Vertic	PASS
4	5353	36.68	52.39	15.71	74.00	21.61	PK	Vertic	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level


Test Report

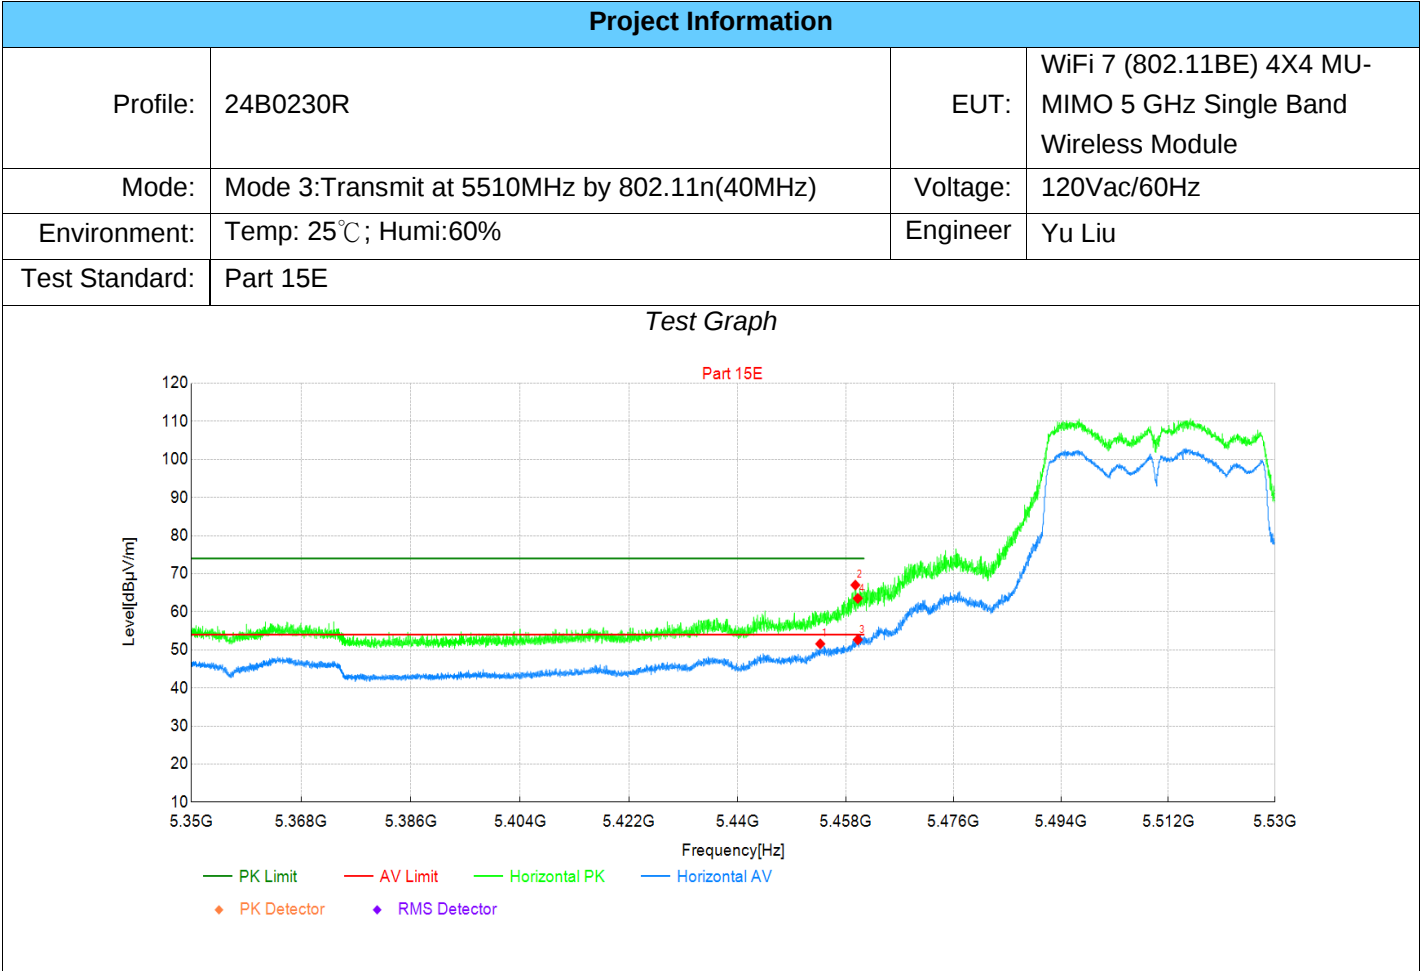

Suspected Data List									
NO	Frequency [MHz]	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Det	Pol	Verdict
1	5454	35.32	51.58	16.26	54.00	2.42	AV	Horizo	PASS
2	5460	50.68	67.02	16.34	74.00	6.98	PK	Horizo	PASS
3	5460	36.32	52.66	16.34	54.00	1.34	AV	Horizo	PASS
4	5460	47.19	63.53	16.34	74.00	10.47	PK	Horizo	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level

Test Report

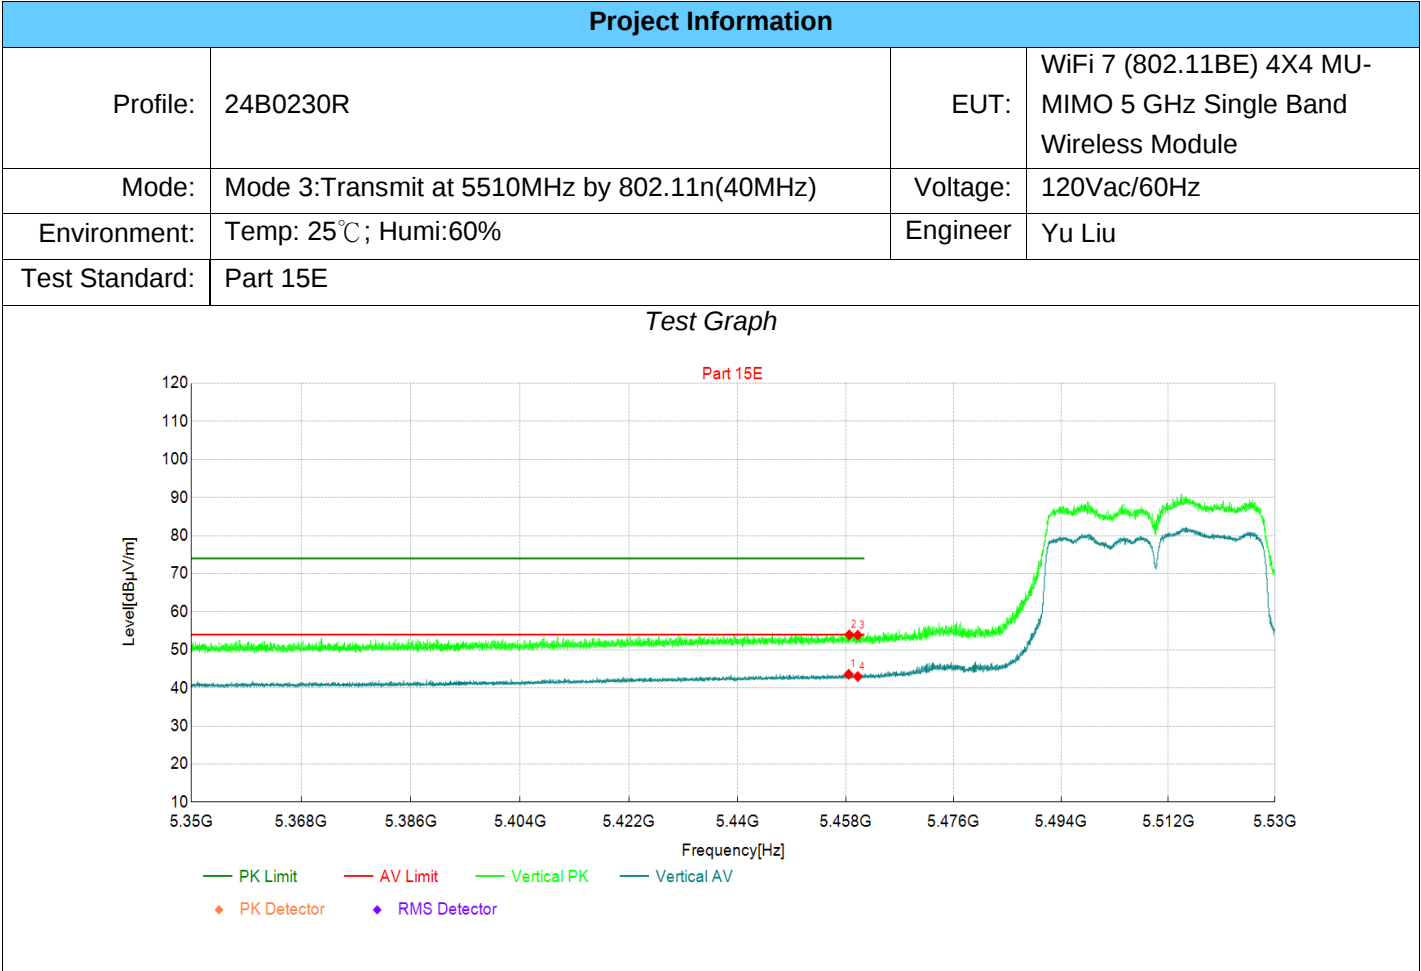

Suspected Data List									
NO	Frequency [MHz]	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Det	Pol	Verdict
1	5458	27.27	43.59	16.32	54.00	10.41	AV	Vertic	PASS
2	5459	37.64	53.96	16.32	74.00	20.04	PK	Vertic	PASS
3	5460	37.52	53.86	16.34	74.00	20.14	PK	Vertic	PASS
4	5460	26.67	43.01	16.34	54.00	10.99	AV	Vertic	PASS


Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level

Test Report

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 4:Transmit at 5180MHz by 802.11ac(20MHz)	Voltage:	120Vac/60Hz
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	Part 15E		

Test Graph

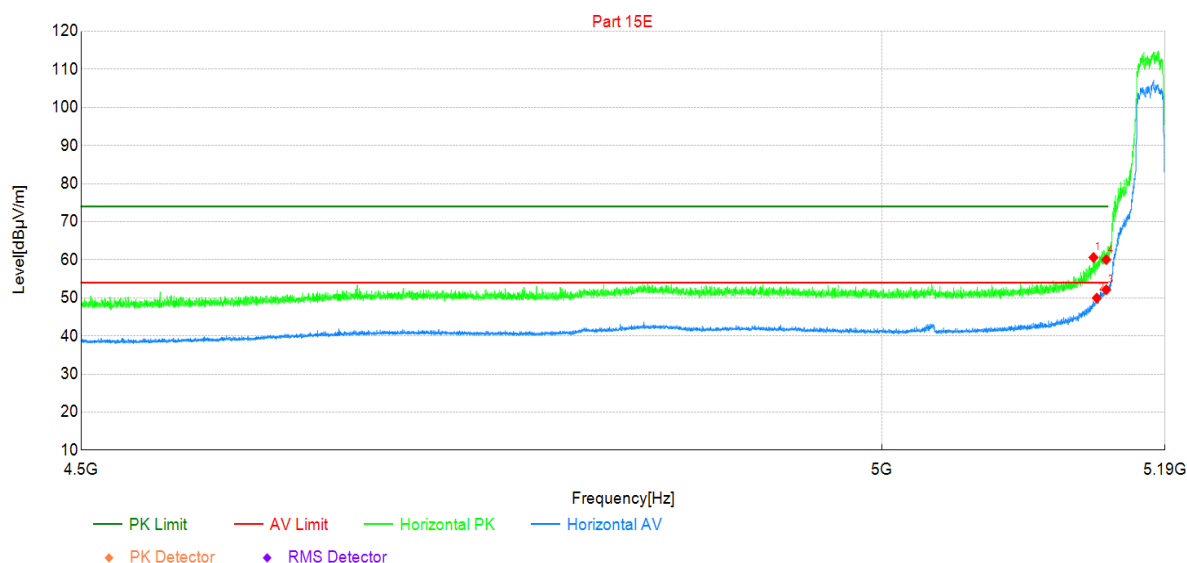

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5141	45.55	60.61	15.06	74.00	13.39	PK	Horizo	PASS
2	5144	34.89	49.96	15.07	54.00	4.04	AV	Horizo	PASS
3	5150	37.03	52.14	15.11	54.00	1.86	AV	Horizo	PASS
4	5150	44.94	60.05	15.11	74.00	13.95	PK	Horizo	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

Test Report

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 4:Transmit at 5180MHz by 802.11ac(20MHz)	Voltage:	120Vac/60Hz
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	Part 15E		

Test Graph

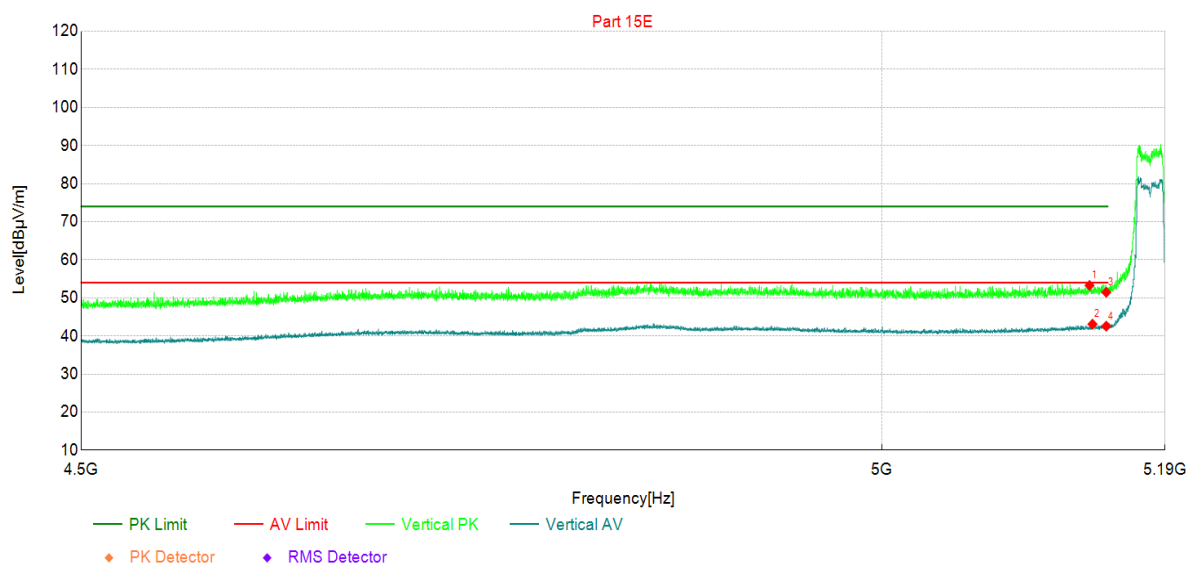

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5139	38.24	53.28	15.04	74.00	20.72	PK	Vertic	PASS
2	5141	28.03	43.09	15.06	54.00	10.91	AV	Vertic	PASS
3	5150	36.37	51.48	15.11	74.00	22.52	PK	Vertic	PASS
4	5150	27.46	42.57	15.11	54.00	11.43	AV	Vertic	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

Test Report

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 4:Transmit at 5320MHz by 802.11ac(20MHz)	Voltage:	120Vac/60Hz
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	Part 15E		

Test Graph

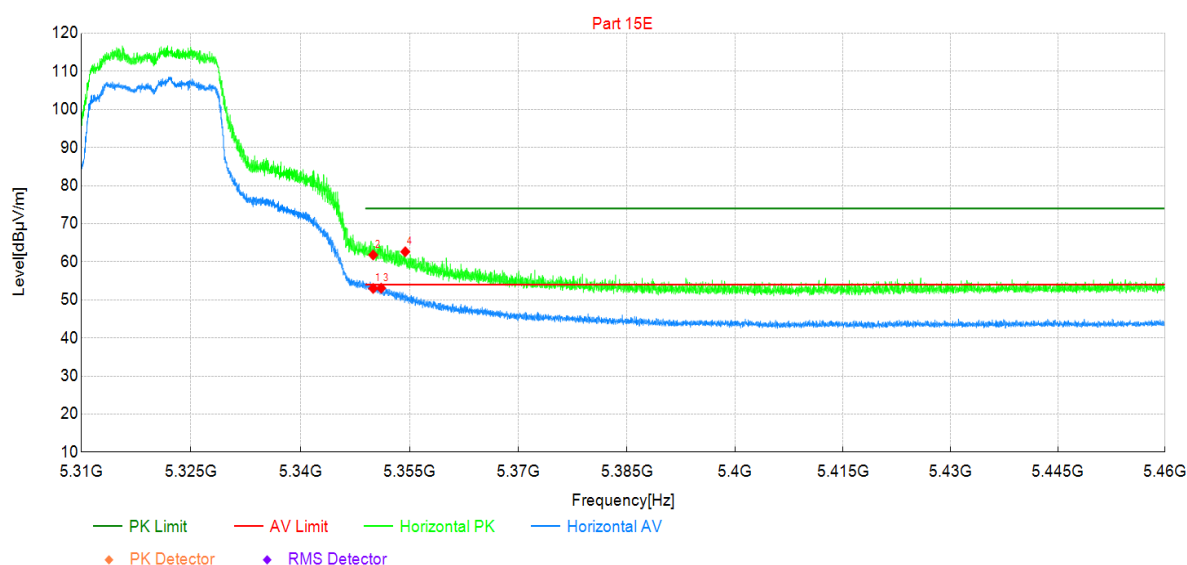


Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5350	37.29	53.00	15.71	54.00	1.00	AV	Horizo	PASS
2	5350	46.08	61.79	15.71	74.00	12.21	PK	Horizo	PASS
3	5351	37.37	53.08	15.71	54.00	0.92	AV	Horizo	PASS
4	5354	46.95	62.65	15.70	74.00	11.35	PK	Horizo	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level


Test Report

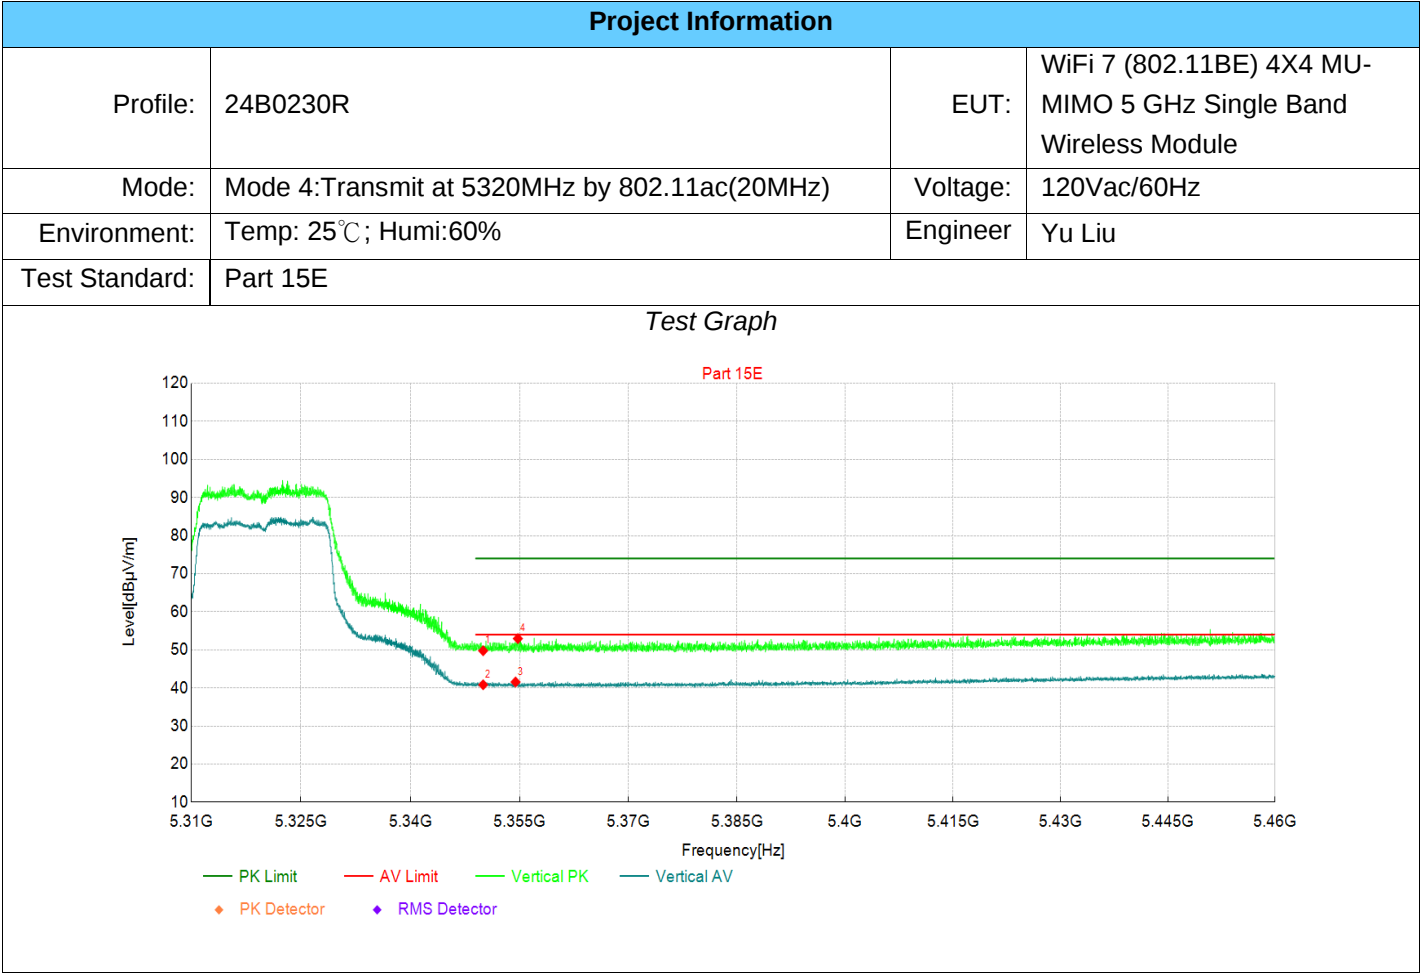

Suspected Data List									
NO	Frequency [MHz]	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Det	Pol	Verdict
1	5350	34.06	49.77	15.71	74.00	24.23	PK	Vertic	PASS
2	5350	25.12	40.83	15.71	54.00	13.17	AV	Vertic	PASS
3	5354	25.86	41.56	15.70	54.00	12.44	AV	Vertic	PASS
4	5355	37.26	52.96	15.70	74.00	21.04	PK	Vertic	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level


Test Report

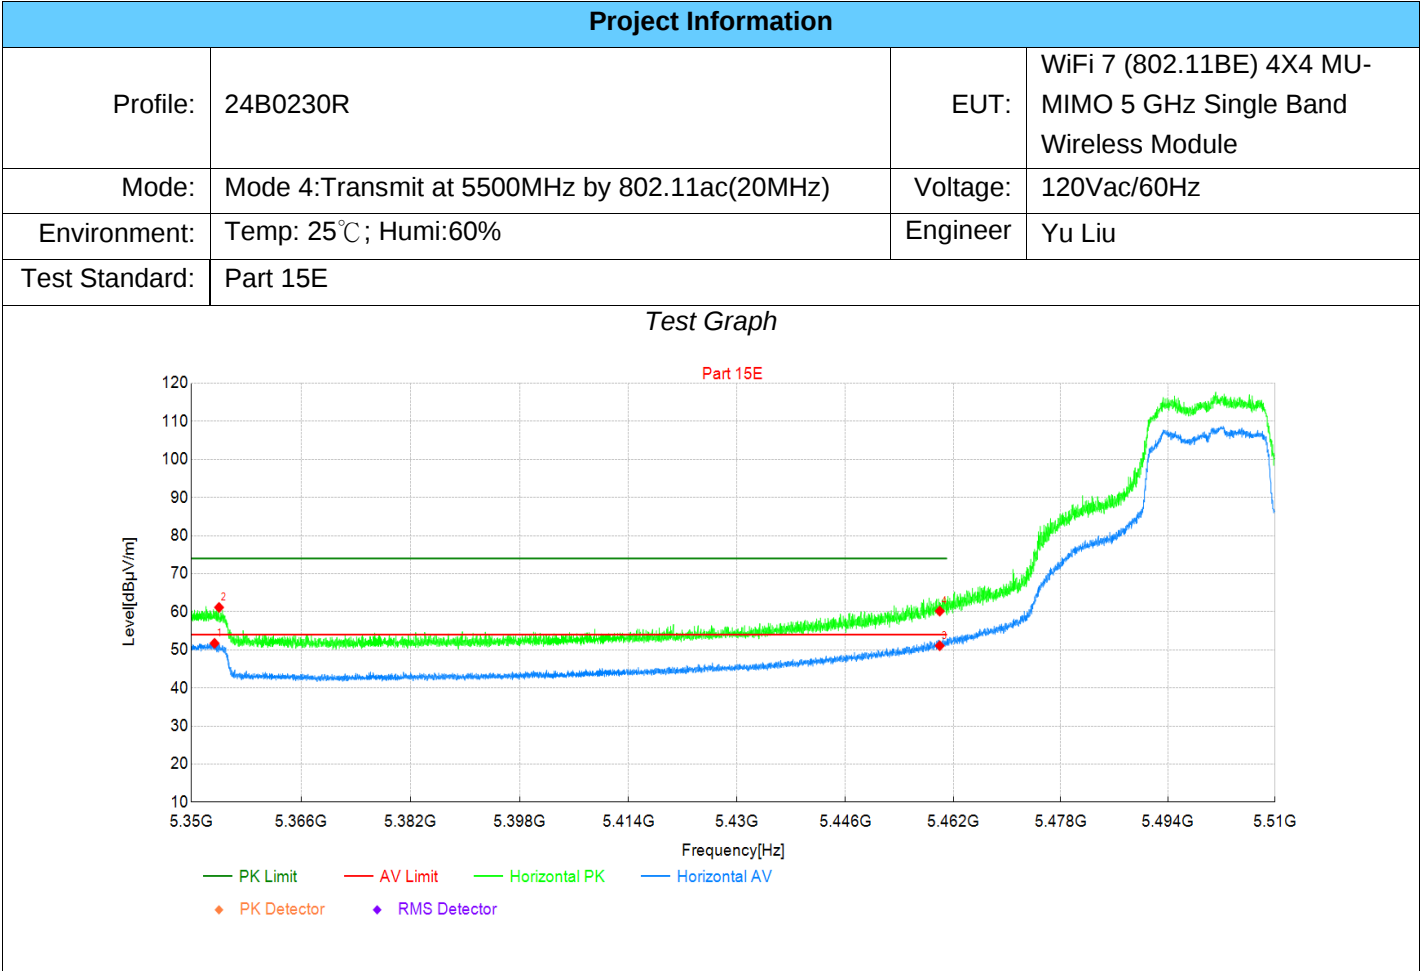

Suspected Data List									
NO	Frequency [MHz]	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Det	Pol	Verdict
1	5353	36.01	51.72	15.71	54.00	2.28	AV	Horizo	PASS
2	5354	45.45	61.15	15.70	74.00	12.85	PK	Horizo	PASS
3	5460	34.75	51.09	16.34	54.00	2.91	AV	Horizo	PASS
4	5460	43.84	60.18	16.34	74.00	13.82	PK	Horizo	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level


Test Report

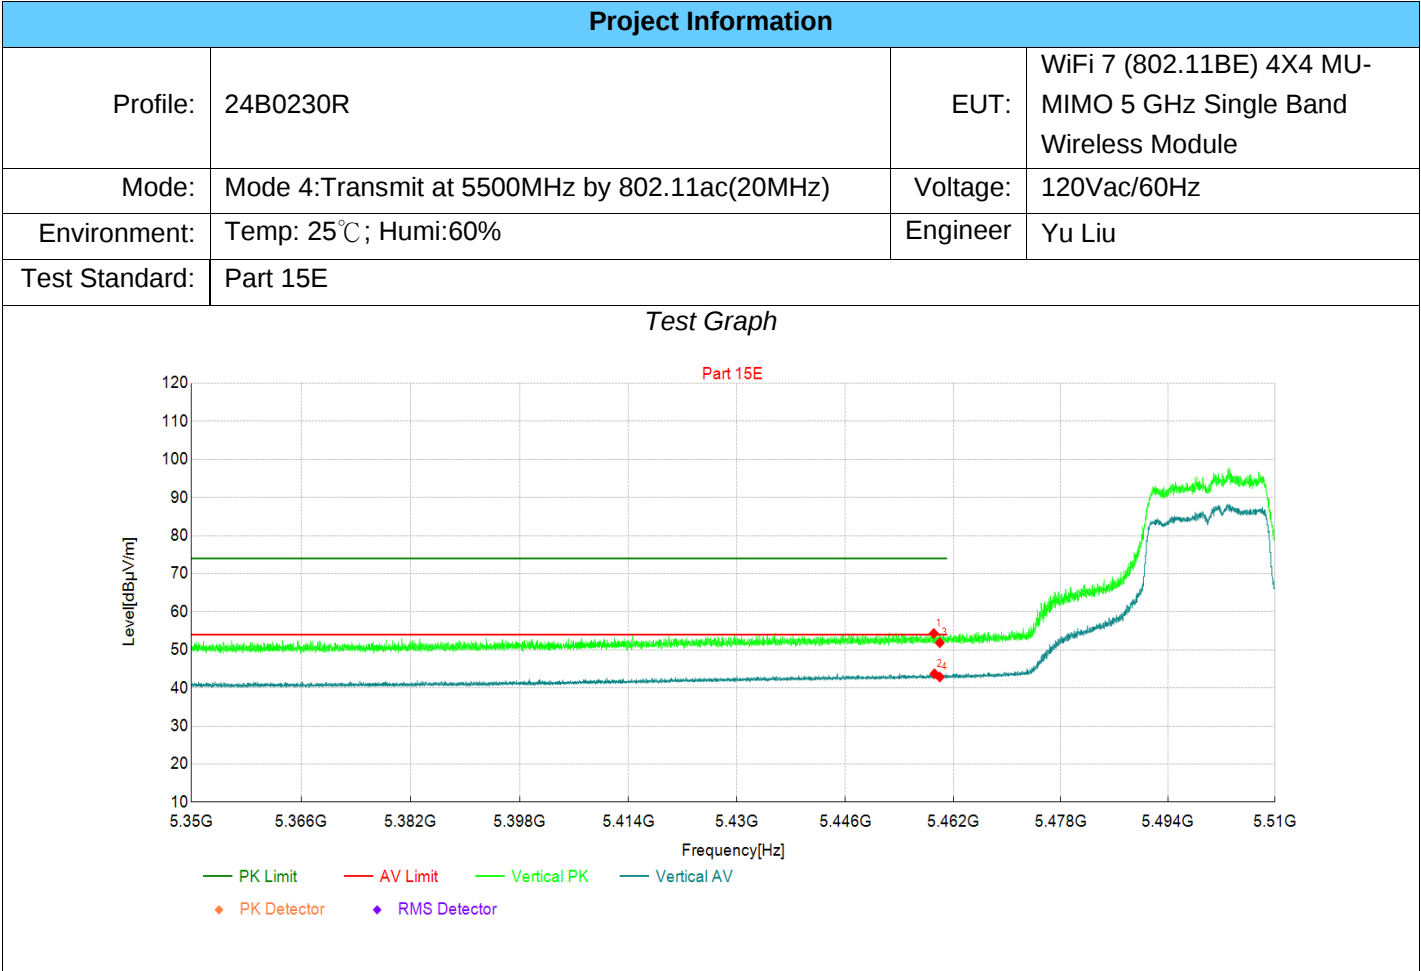

Suspected Data List									
NO	Frequency [MHz]	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Det	Pol	Verdict
1	5459	37.97	54.30	16.33	74.00	19.70	PK	Vertic	PASS
2	5459	27.38	43.71	16.33	54.00	10.29	AV	Vertic	PASS
3	5460	35.53	51.87	16.34	74.00	22.13	PK	Vertic	PASS
4	5460	26.54	42.88	16.34	54.00	11.12	AV	Vertic	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level


Test Report

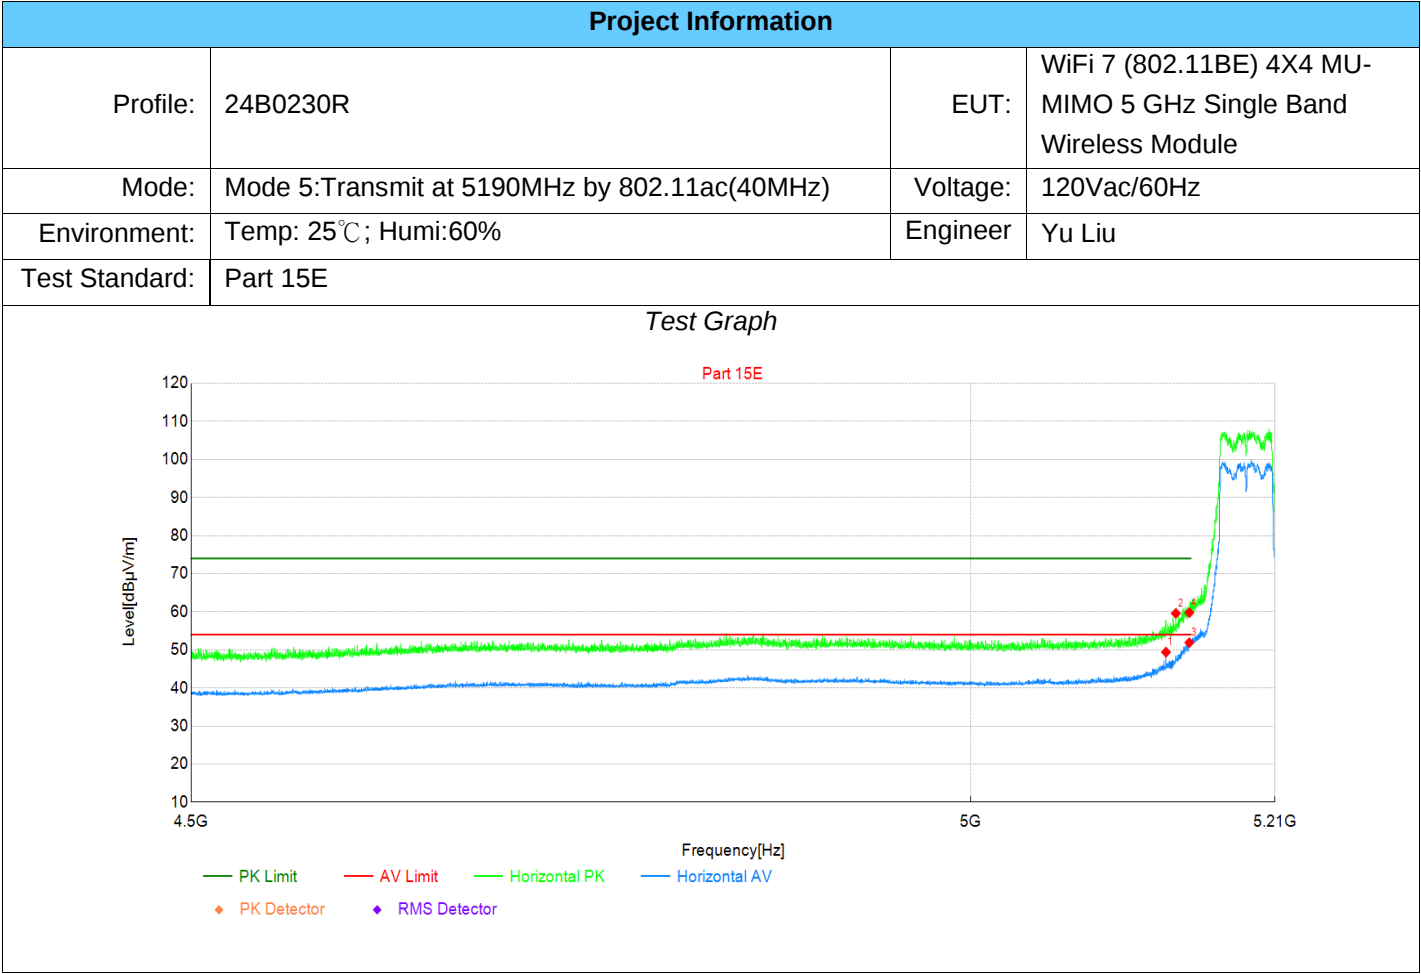

Suspected Data List									
NO	Frequency [MHz]	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Det	Pol	Verdict
1	5134	34.37	49.39	15.02	54.00	4.61	AV	Horizo	PASS
2	5141	44.53	59.59	15.06	74.00	14.41	PK	Horizo	PASS
3	5150	36.79	51.90	15.11	54.00	2.10	AV	Horizo	PASS
4	5150	44.68	59.79	15.11	74.00	14.21	PK	Horizo	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level


Test Report

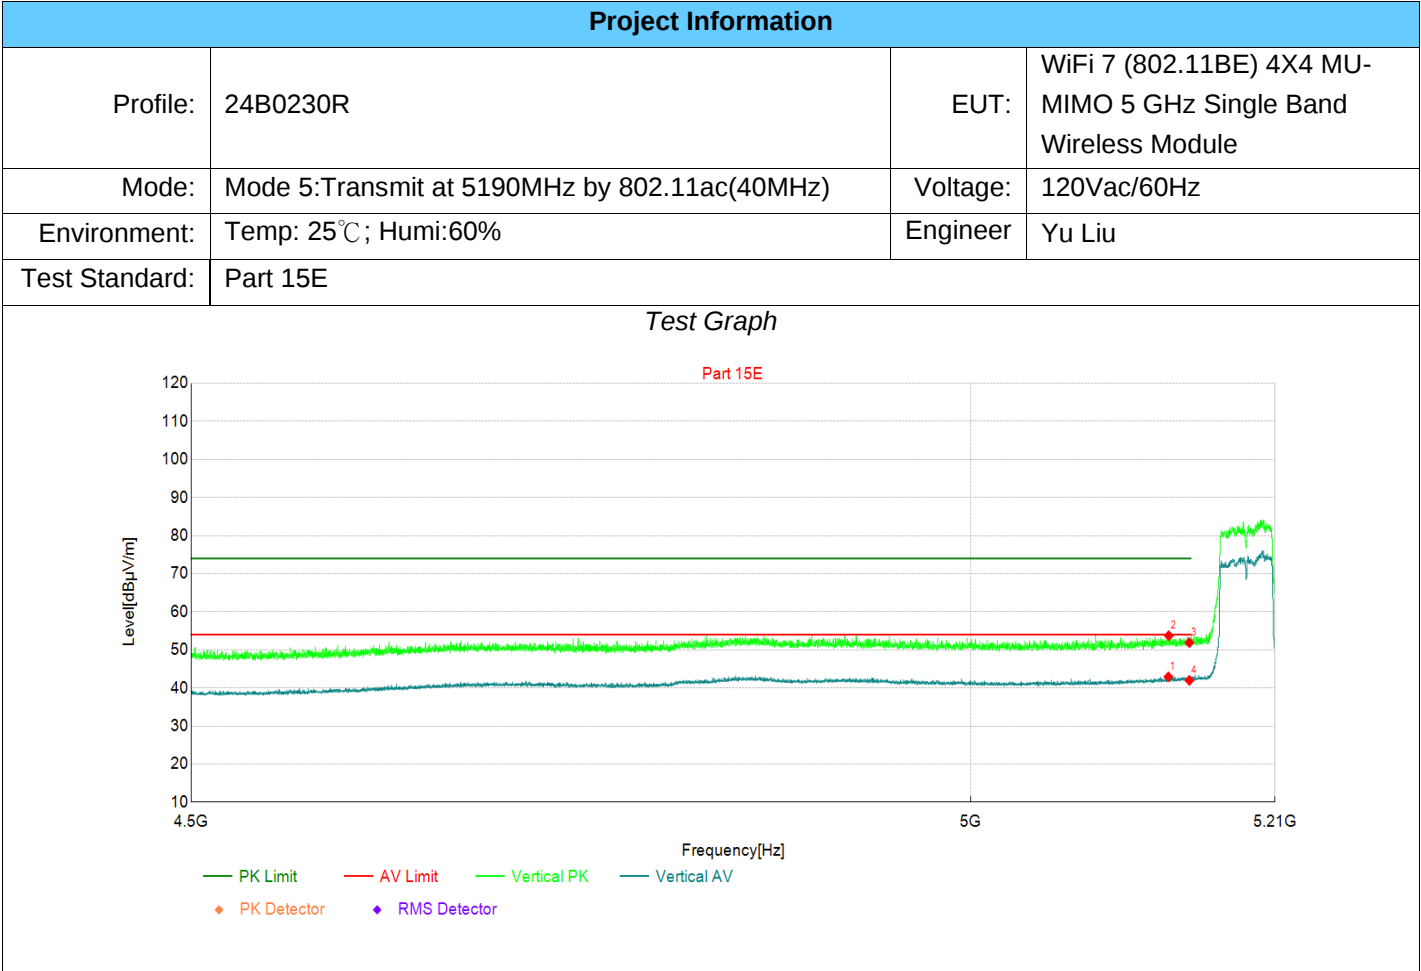

Suspected Data List									
NO	Frequency [MHz]	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Det	Pol	Verdict
1	5135	27.89	42.92	15.03	54.00	11.08	AV	Vertic	PASS
2	5136	38.70	53.73	15.03	74.00	20.27	PK	Vertic	PASS
3	5150	36.78	51.89	15.11	74.00	22.11	PK	Vertic	PASS
4	5150	26.87	41.98	15.11	54.00	12.02	AV	Vertic	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level


Test Report

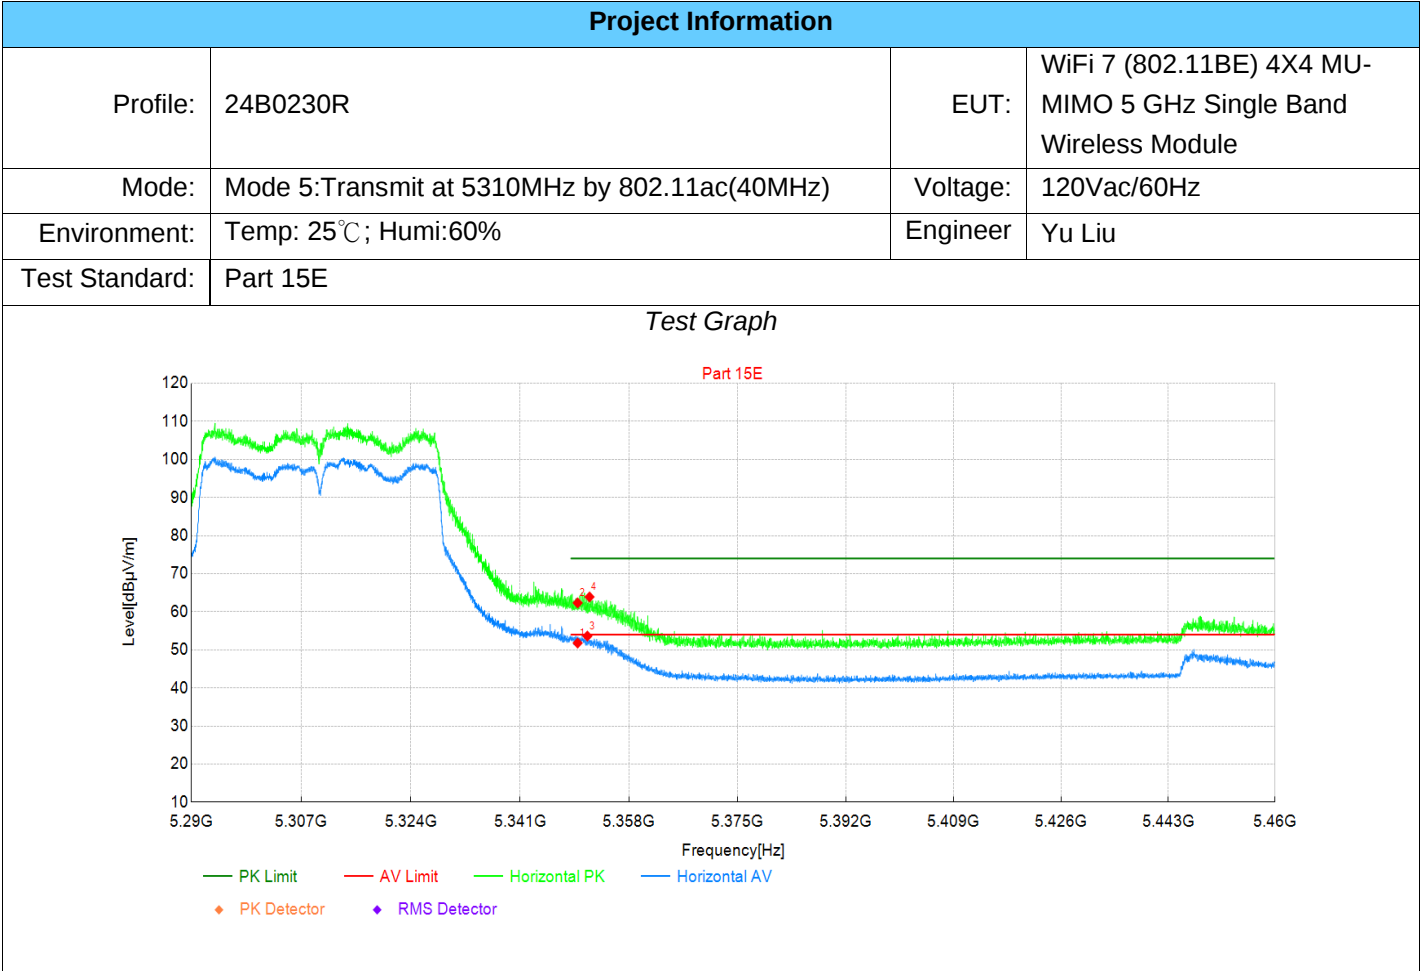

Suspected Data List									
NO	Frequency [MHz]	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Det	Pol	Verdict
1	5350	36.08	51.79	15.71	54.00	2.21	AV	Horizo	PASS
2	5350	46.63	62.34	15.71	74.00	11.66	PK	Horizo	PASS
3	5352	37.91	53.62	15.71	54.00	0.38	AV	Horizo	PASS
4	5352	48.19	63.90	15.71	74.00	10.10	PK	Horizo	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level


Test Report

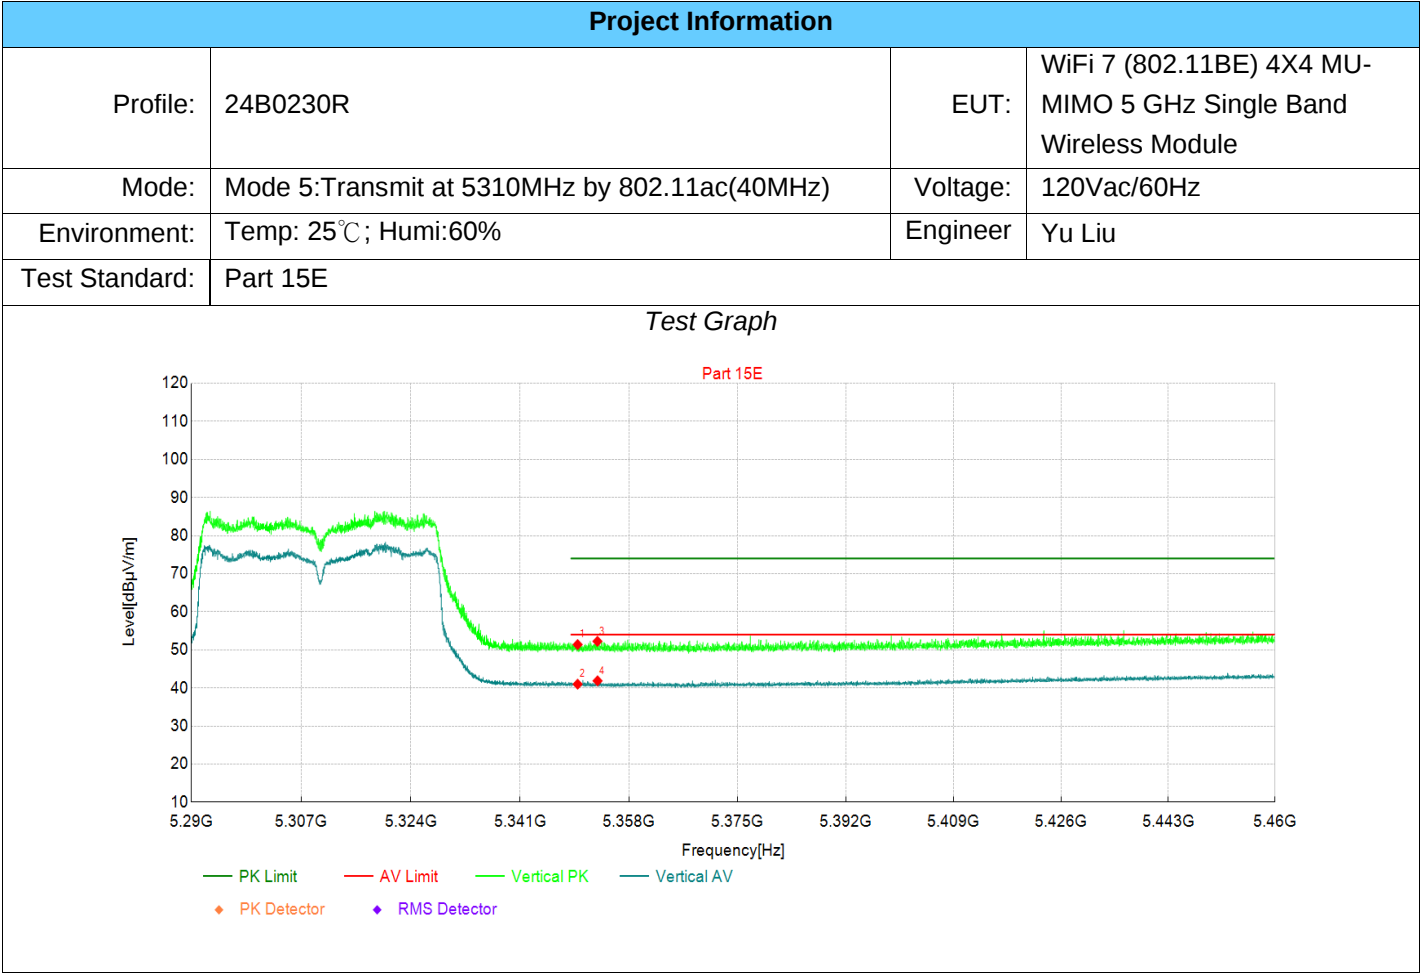

Suspected Data List									
NO	Frequency [MHz]	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Det	Pol	Verdict
1	5350	35.68	51.39	15.71	74.00	22.61	PK	Vertic	PASS
2	5350	25.27	40.98	15.71	54.00	13.02	AV	Vertic	PASS
3	5353	36.53	52.24	15.71	74.00	21.76	PK	Vertic	PASS
4	5353	26.15	41.86	15.71	54.00	12.14	AV	Vertic	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level


Test Report

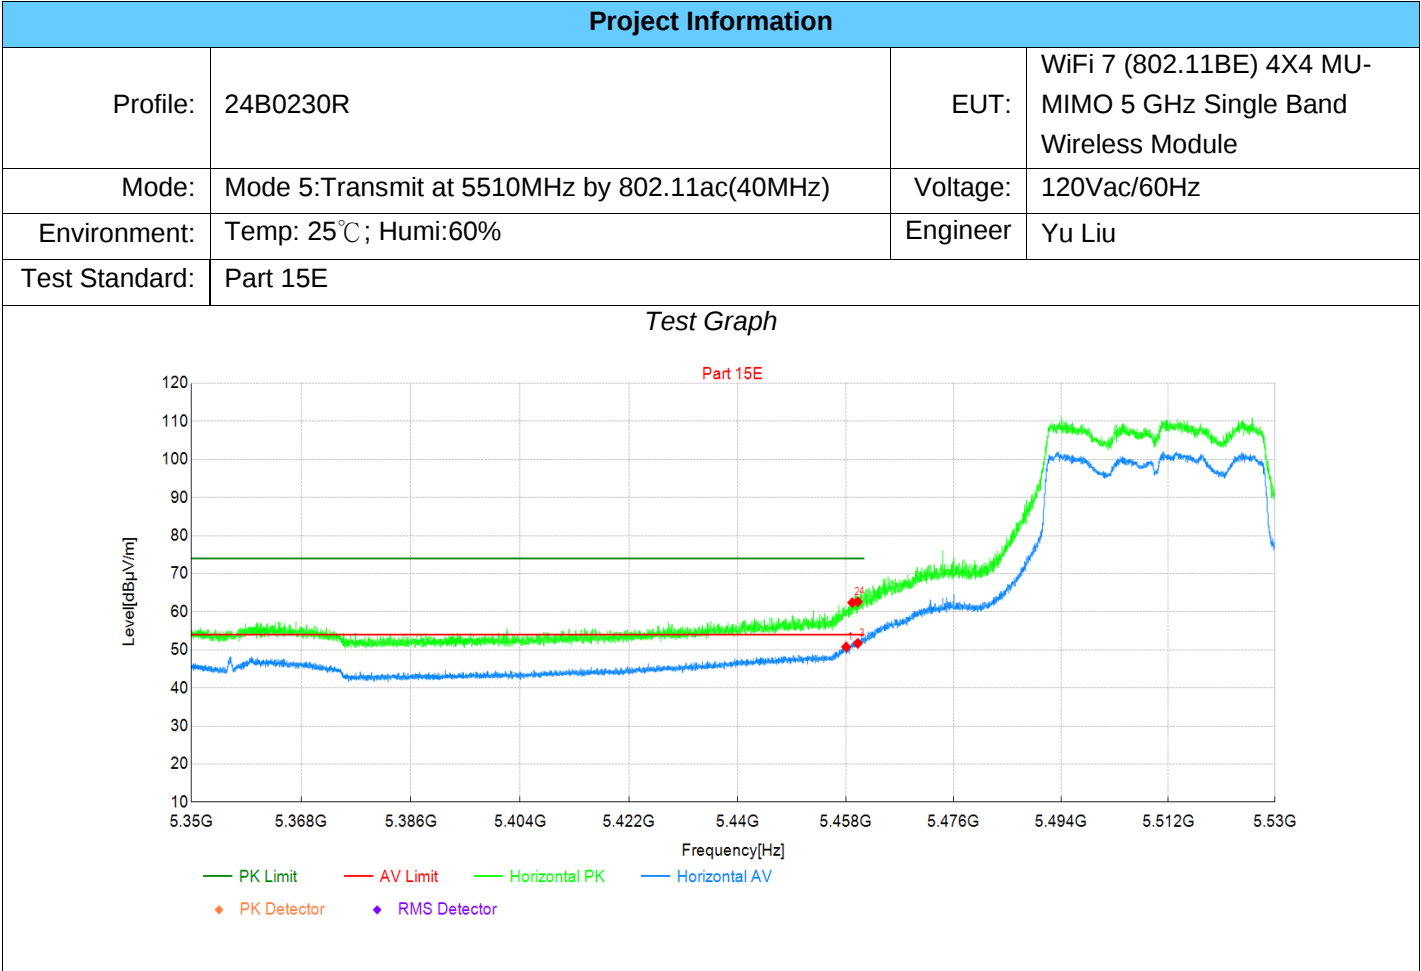

Suspected Data List									
NO	Frequency [MHz]	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Det	Pol	Verdict
1	5458	34.47	50.78	16.31	54.00	3.22	AV	Horizo	PASS
2	5459	46.08	62.41	16.33	74.00	11.59	PK	Horizo	PASS
3	5460	35.37	51.71	16.34	54.00	2.29	AV	Horizo	PASS
4	5460	46.32	62.66	16.34	74.00	11.34	PK	Horizo	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level

Test Report

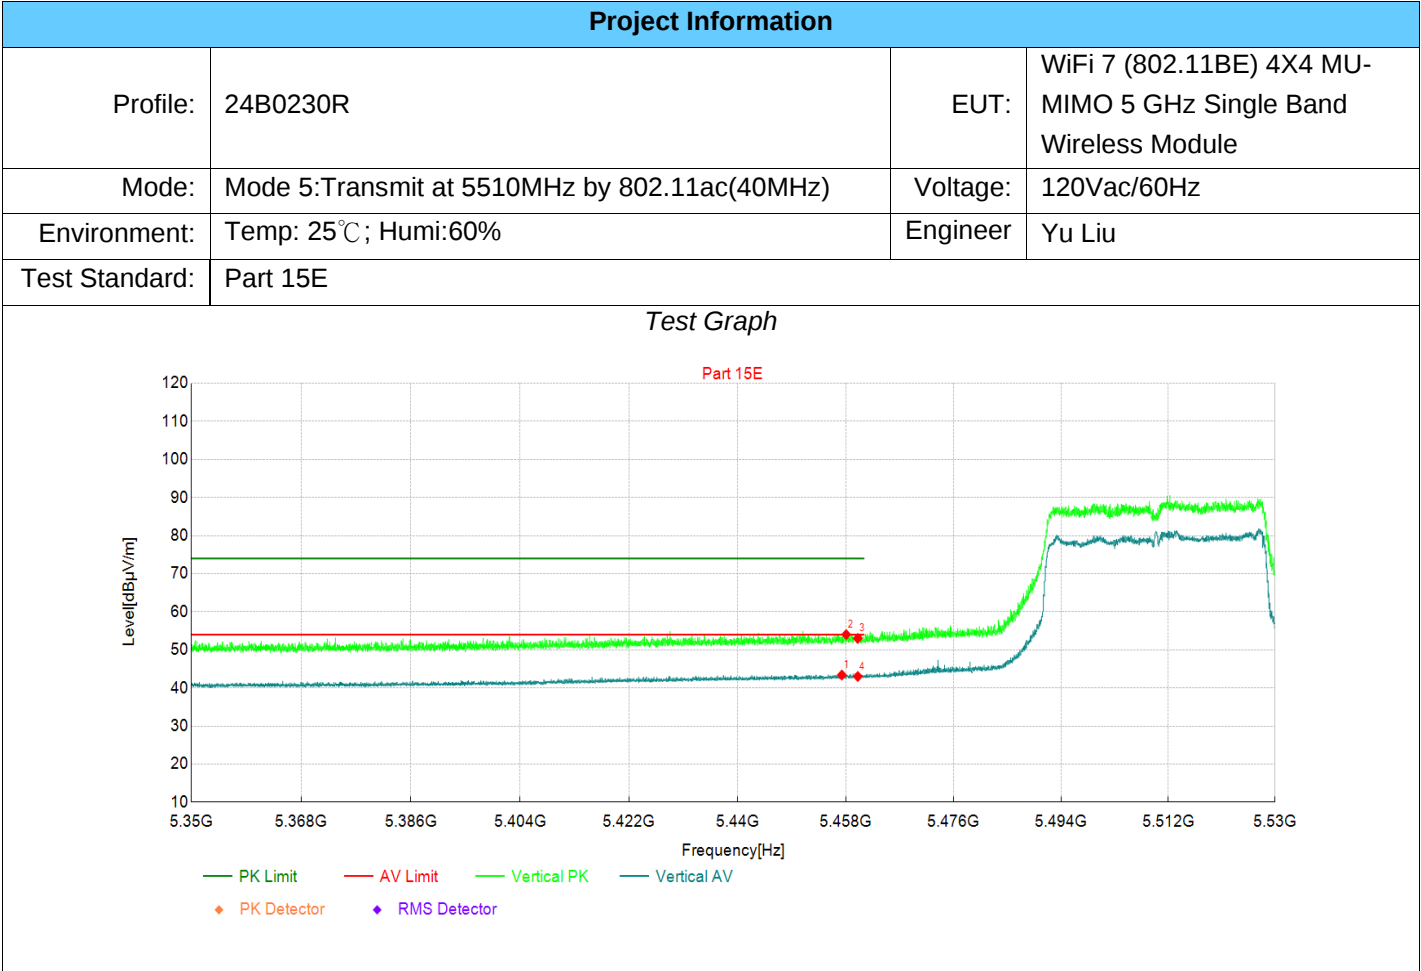

Suspected Data List									
NO	Frequency [MHz]	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Det	Pol	Verdict
1	5457	27.08	43.39	16.31	54.00	10.61	AV	Vertic	PASS
2	5458	37.72	54.03	16.31	74.00	19.97	PK	Vertic	PASS
3	5460	36.67	53.01	16.34	74.00	20.99	PK	Vertic	PASS
4	5460	26.67	43.01	16.34	54.00	10.99	AV	Vertic	PASS


Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level

Test Report

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 6:Transmit at 5210MHz by 802.11ac(80MHz)	Voltage:	120Vac/60Hz
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	Part 15E		

Test Graph

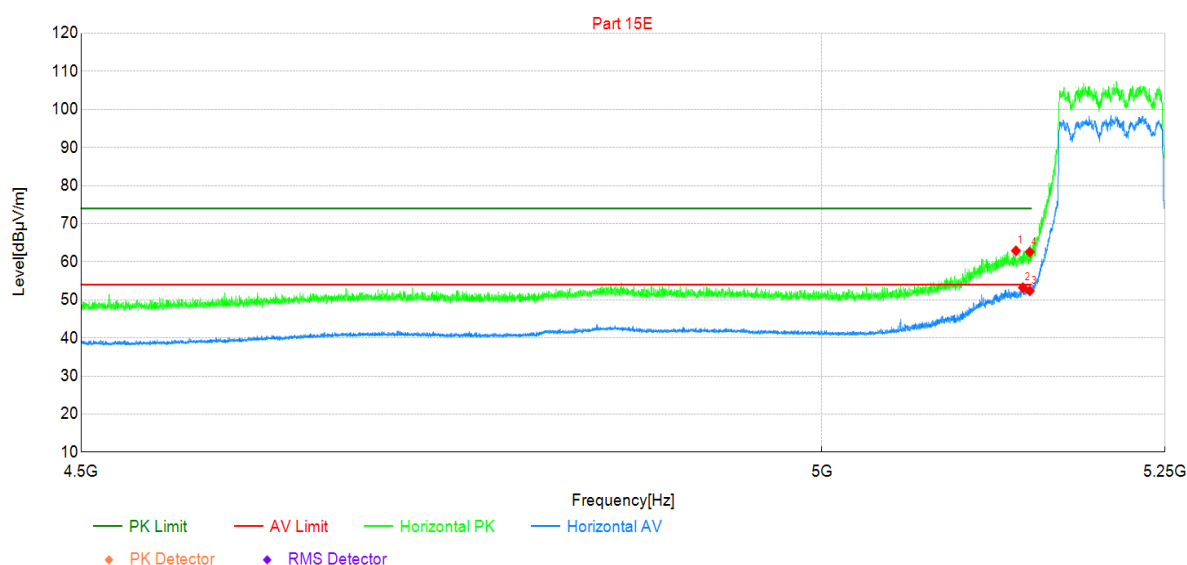

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5140	47.83	62.88	15.05	74.00	11.12	PK	Horizo	PASS
2	5145	38.13	53.21	15.08	54.00	0.79	AV	Horizo	PASS
3	5150	37.28	52.39	15.11	54.00	1.61	AV	Horizo	PASS
4	5150	47.48	62.59	15.11	74.00	11.41	PK	Horizo	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

Test Report

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 6:Transmit at 5210MHz by 802.11ac(80MHz)	Voltage:	120Vac/60Hz
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	Part 15E		

Test Graph

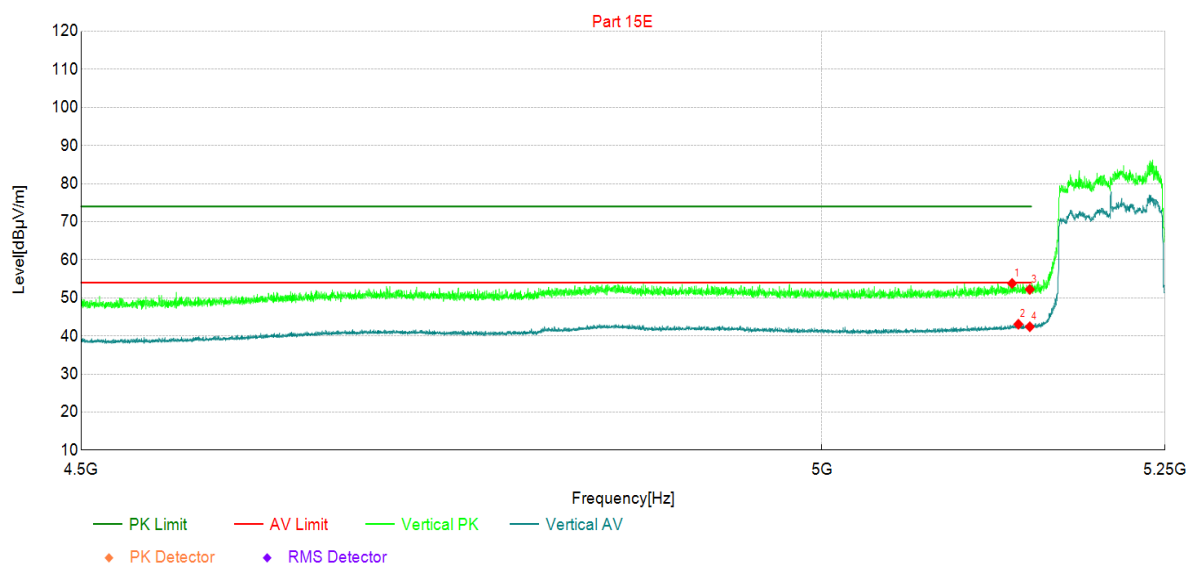

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5137	38.76	53.79	15.03	74.00	20.21	PK	Vertic	PASS
2	5142	28.01	43.07	15.06	54.00	10.93	AV	Vertic	PASS
3	5150	37.11	52.22	15.11	74.00	21.78	PK	Vertic	PASS
4	5150	27.30	42.41	15.11	54.00	11.59	AV	Vertic	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

Test Report

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 6:Transmit at 5290MHz by 802.11ac(80MHz)	Voltage:	120Vac/60Hz
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	Part 15E		

Test Graph

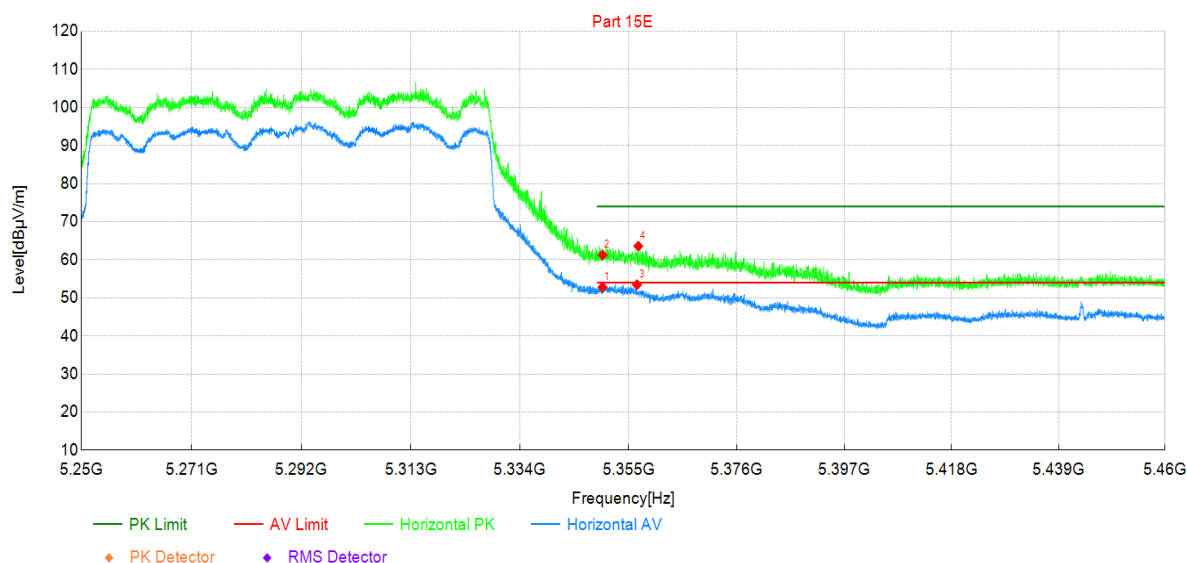


Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5350	37.09	52.80	15.71	54.00	1.20	AV	Horizo	PASS
2	5350	45.55	61.26	15.71	74.00	12.74	PK	Horizo	PASS
3	5357	37.75	53.45	15.70	54.00	0.55	AV	Horizo	PASS
4	5357	47.88	63.58	15.70	74.00	10.42	PK	Horizo	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Test Report

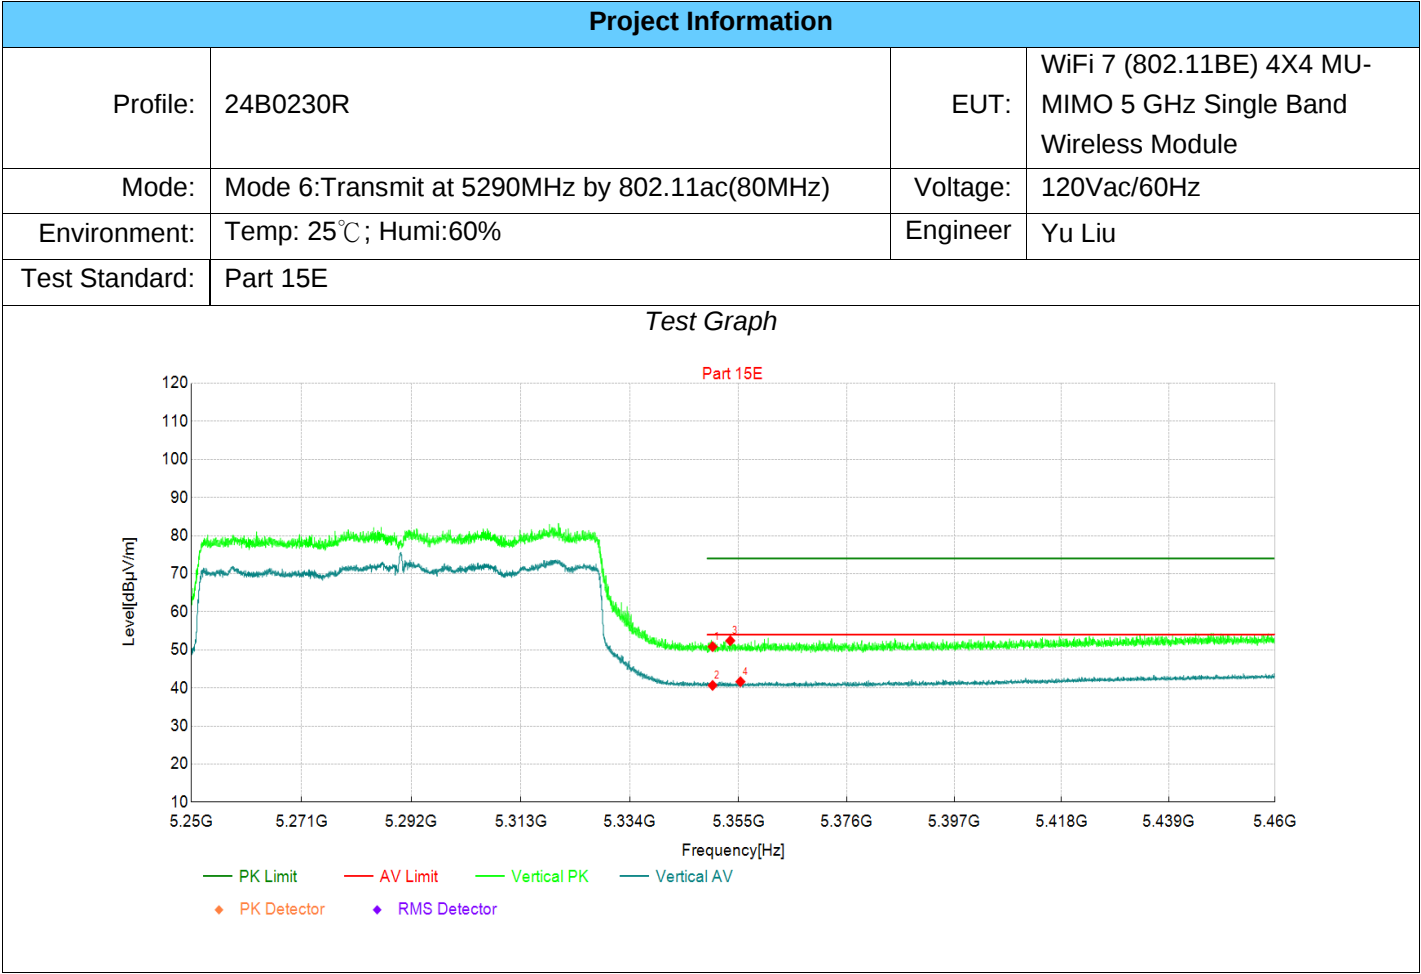

Suspected Data List									
NO	Frequency [MHz]	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Det	Pol	Verdict
1	5350	35.14	50.85	15.71	74.00	23.15	PK	Vertic	PASS
2	5350	24.95	40.66	15.71	54.00	13.34	AV	Vertic	PASS
3	5353	36.70	52.41	15.71	74.00	21.59	PK	Vertic	PASS
4	5355	25.93	41.63	15.70	54.00	12.37	AV	Vertic	PASS


Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level

Test Report

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 6:Transmit at 5530MHz by 802.11ac(80MHz)	Voltage:	120Vac/60Hz
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	Part 15E		

Test Graph

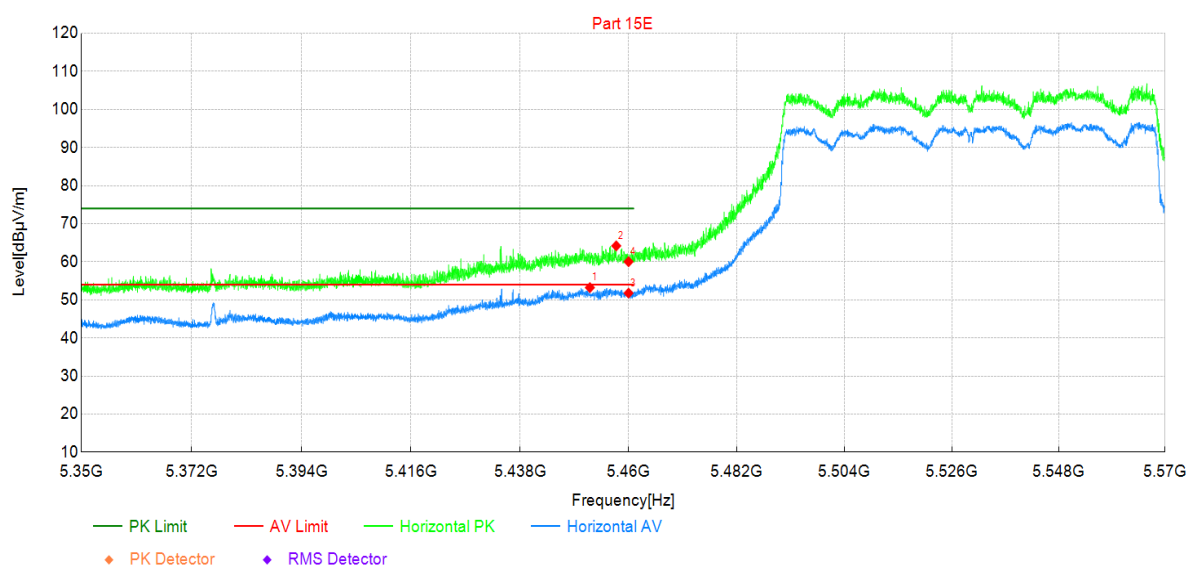


Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5452	36.97	53.22	16.25	54.00	0.78	AV	Horizo	PASS
2	5457	47.87	64.18	16.31	74.00	9.82	PK	Horizo	PASS
3	5460	35.44	51.78	16.34	54.00	2.22	AV	Horizo	PASS
4	5460	43.70	60.04	16.34	74.00	13.96	PK	Horizo	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Test Report

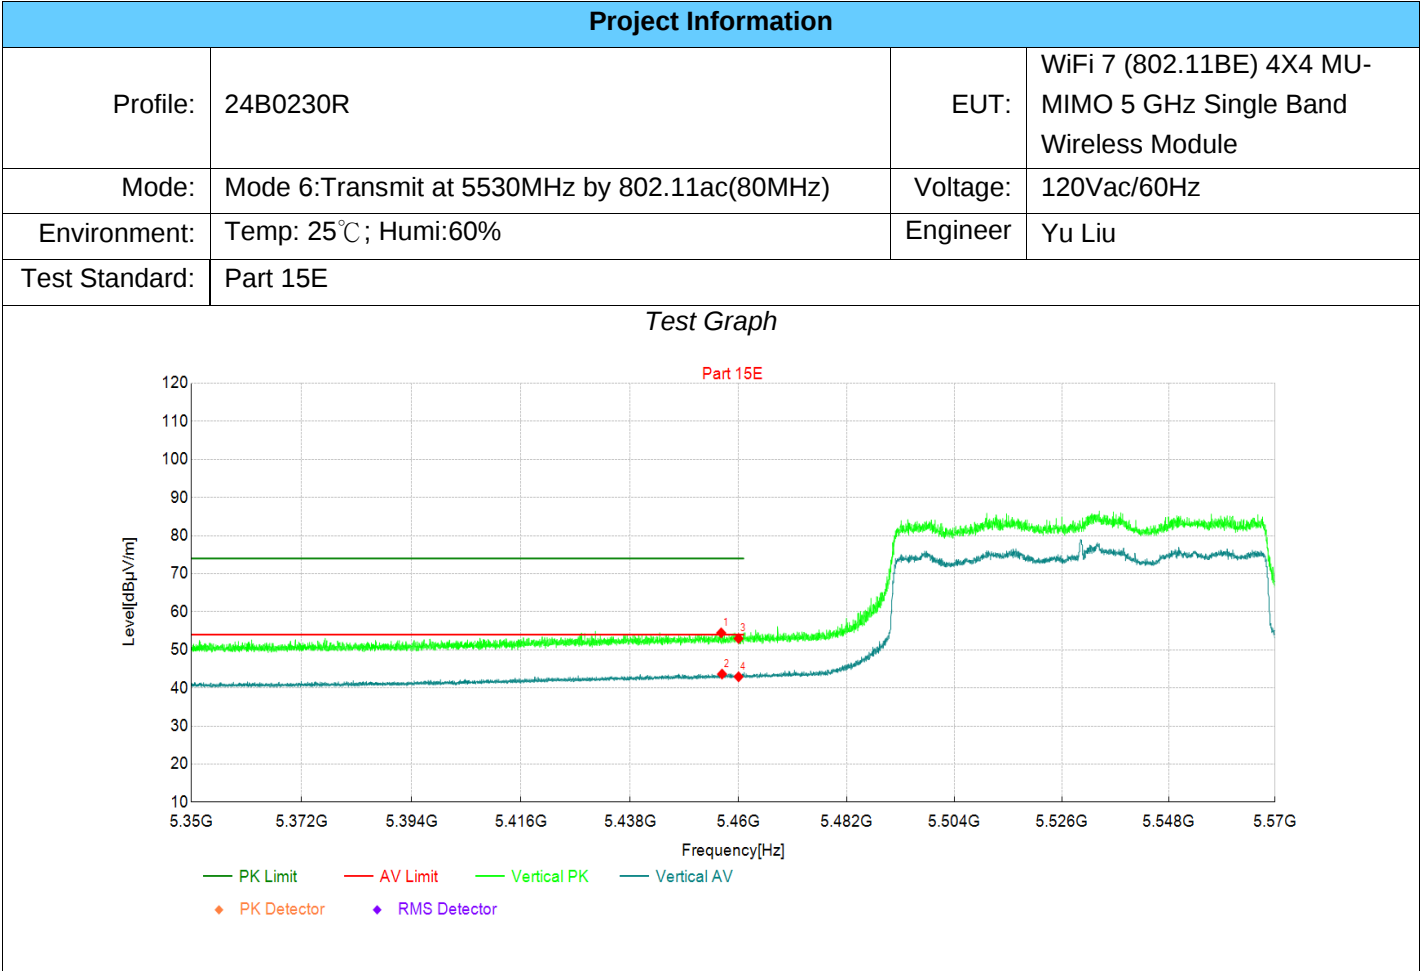

Suspected Data List									
NO	Frequency [MHz]	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Det	Pol	Verdict
1	5456	38.17	54.47	16.30	74.00	19.53	PK	Vertic	PASS
2	5457	27.35	43.65	16.30	54.00	10.35	AV	Vertic	PASS
3	5460	36.65	52.99	16.34	74.00	21.01	PK	Vertic	PASS
4	5460	26.59	42.93	16.34	54.00	11.07	AV	Vertic	PASS


Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level

Test Report

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 7:Transmit at 5250MHz by 802.11ac(160MHz)	Voltage:	120Vac/60Hz
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	Part 15E		

Test Graph

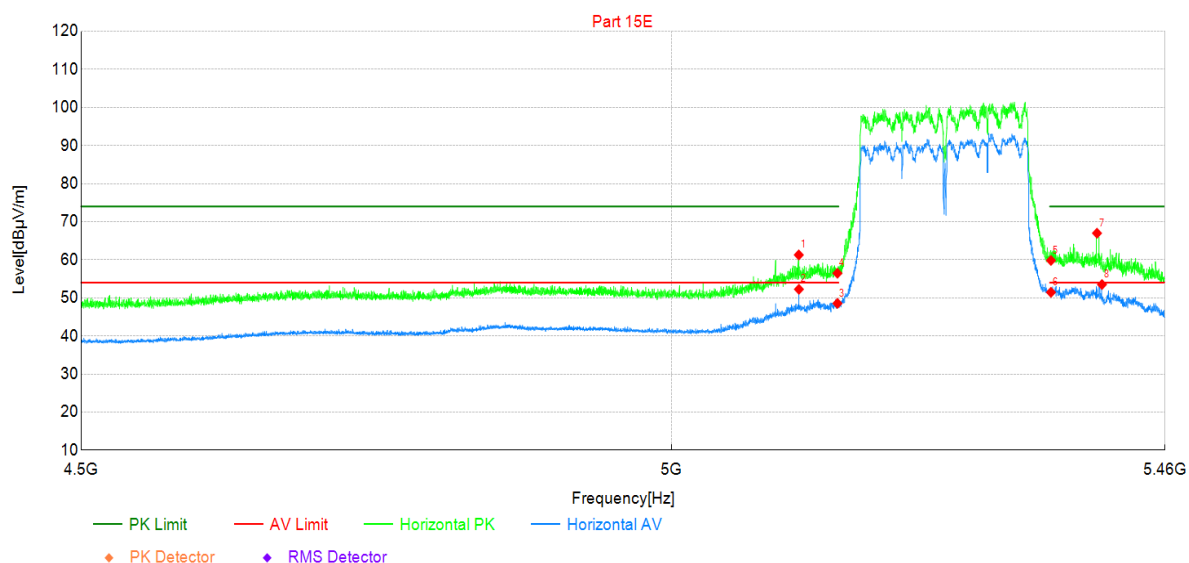

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5115	46.39	61.28	14.89	74.00	12.72	PK	Horizo	PASS
2	5115	37.36	52.26	14.90	54.00	1.74	AV	Horizo	PASS
3	5150	33.44	48.55	15.11	54.00	5.45	AV	Horizo	PASS
4	5150	41.36	56.47	15.11	74.00	17.53	PK	Horizo	PASS
5	5350	44.12	59.83	15.71	74.00	14.17	PK	Horizo	PASS
6	5350	35.75	51.46	15.71	54.00	2.54	AV	Horizo	PASS
7	5394	51.32	66.98	15.66	74.00	7.02	PK	Horizo	PASS
8	5399	37.85	53.50	15.65	54.00	0.50	AV	Horizo	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

Test Report

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 7:Transmit at 5250MHz by 802.11ac(160MHz)	Voltage:	120Vac/60Hz
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	Part 15E		

Test Graph

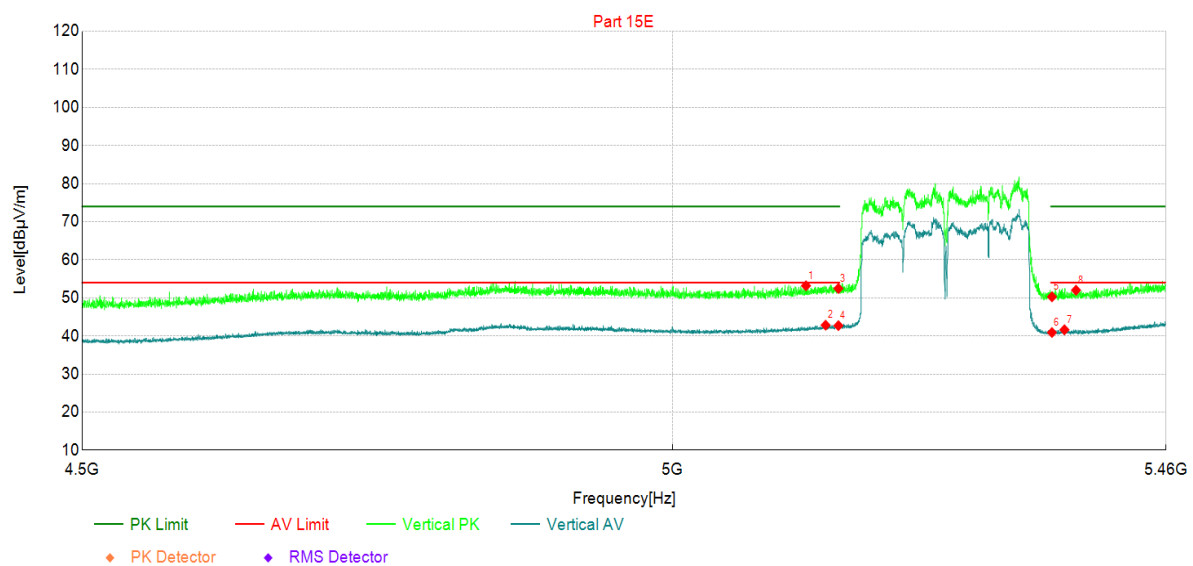


Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5120	38.23	53.17	14.94	74.00	20.83	PK	Vertic	PASS
2	5138	27.78	42.82	15.04	54.00	11.18	AV	Vertic	PASS
3	5150	37.35	52.46	15.11	74.00	21.54	PK	Vertic	PASS
4	5150	27.60	42.71	15.11	54.00	11.29	AV	Vertic	PASS
5	5350	34.57	50.28	15.71	74.00	23.72	PK	Vertic	PASS
6	5350	25.19	40.90	15.71	54.00	13.10	AV	Vertic	PASS
7	5362	25.93	41.62	15.69	54.00	12.38	AV	Vertic	PASS
8	5373	36.33	52.01	15.68	74.00	21.99	PK	Vertic	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level


Test Report

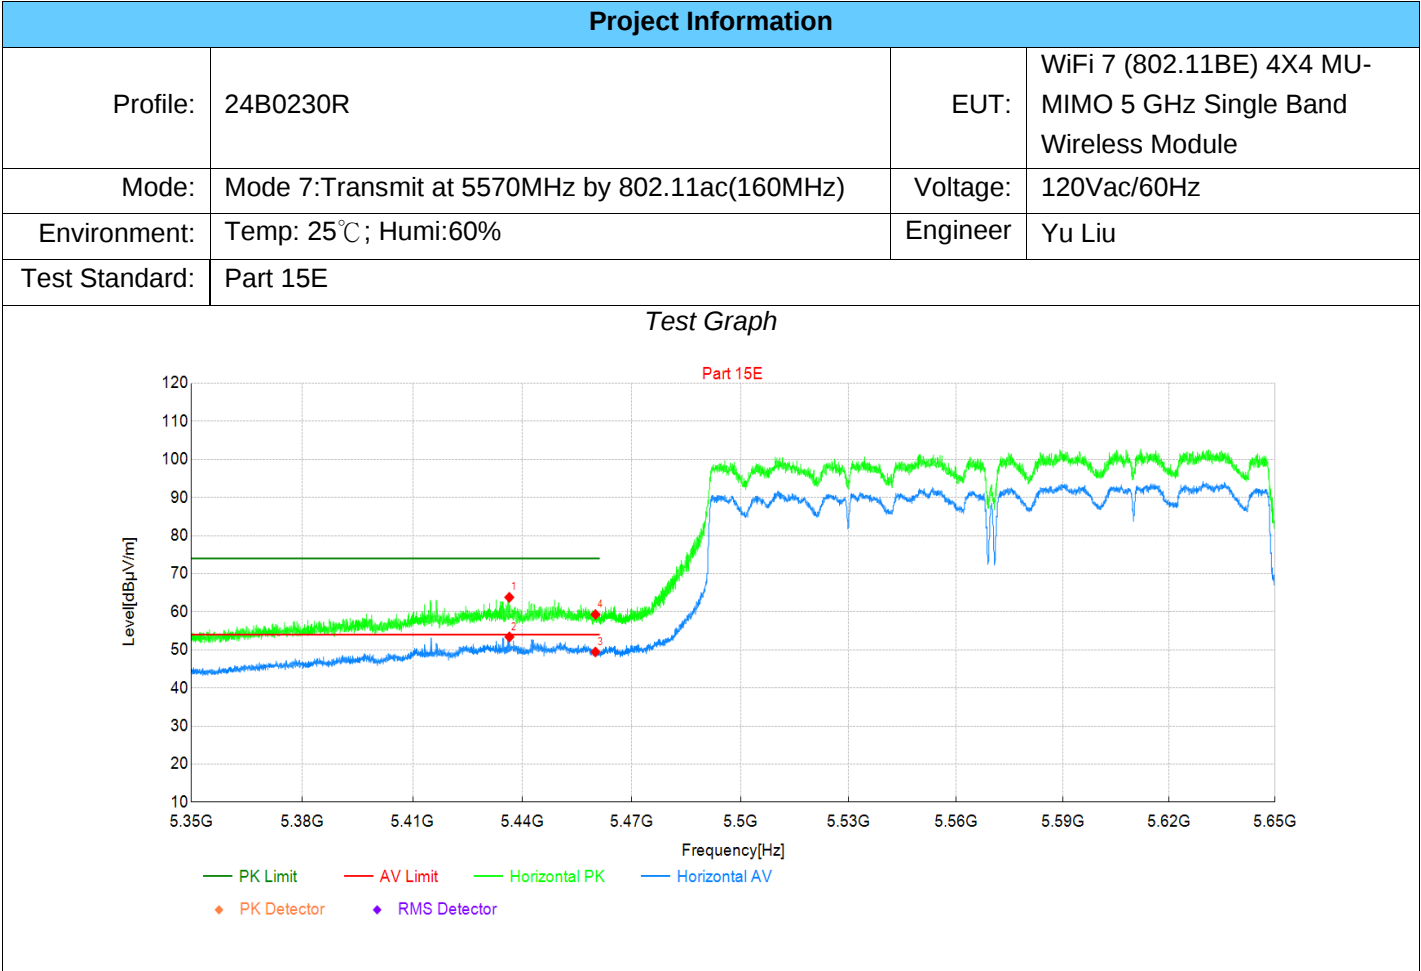

Suspected Data List									
NO	Frequency [MHz]	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Det	Pol	Verdict
1	5436	47.74	63.80	16.06	74.00	10.20	PK	Horizo	PASS
2	5436	37.34	53.40	16.06	54.00	0.60	AV	Horizo	PASS
3	5460	33.11	49.45	16.34	54.00	4.55	AV	Horizo	PASS
4	5460	42.96	59.30	16.34	74.00	14.70	PK	Horizo	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level


Test Report

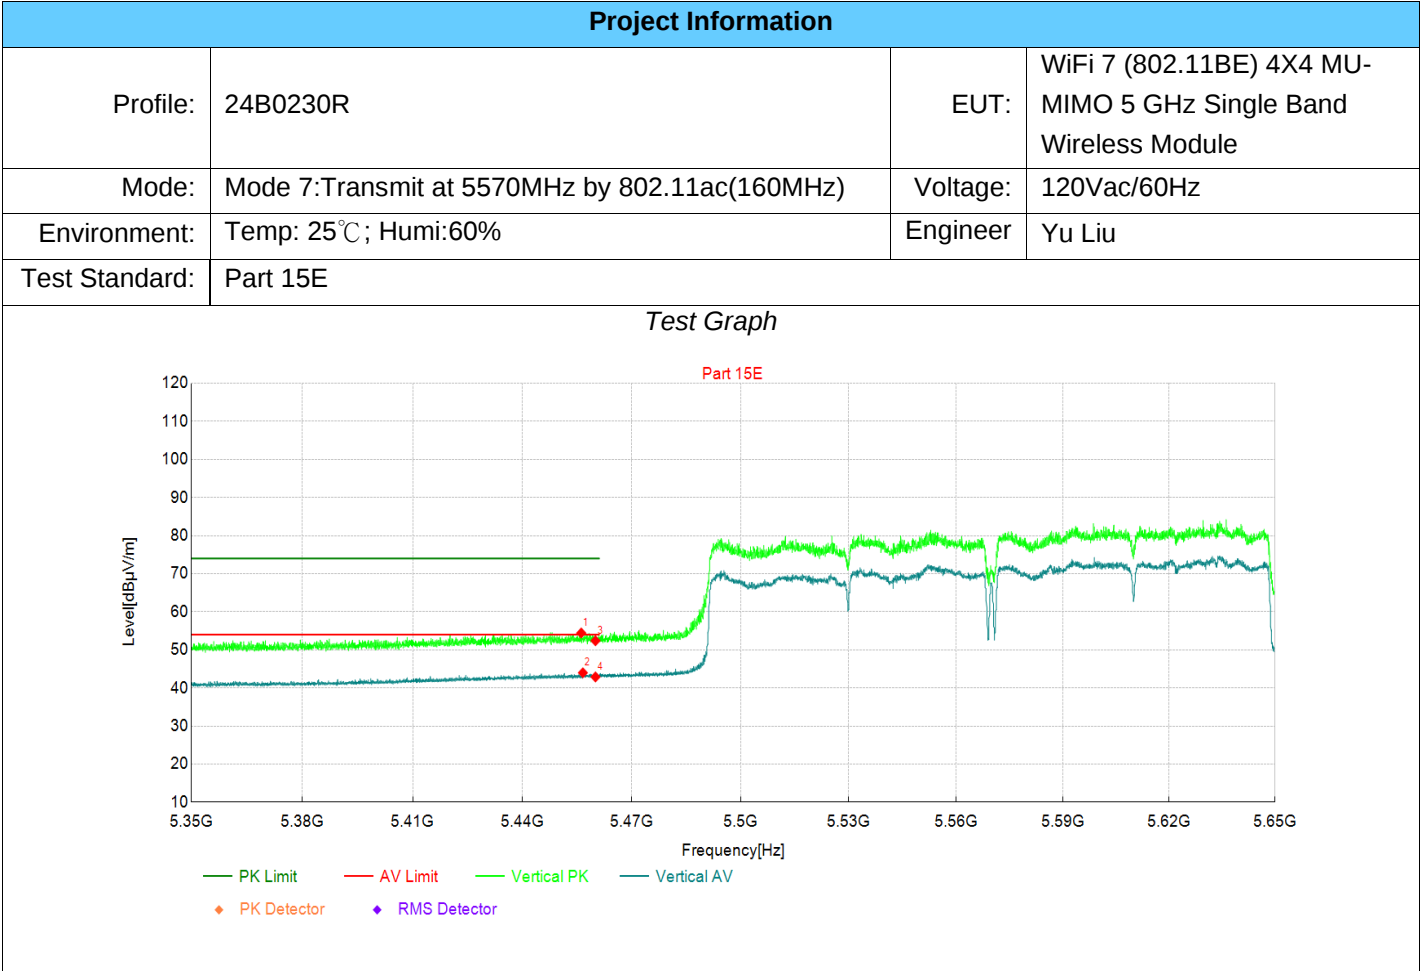

Suspected Data List									
NO	Frequency [MHz]	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Det	Pol	Verdict
1	5456	38.14	54.44	16.30	74.00	19.56	PK	Vertic	PASS
2	5457	27.68	43.98	16.30	54.00	10.02	AV	Vertic	PASS
3	5460	36.06	52.40	16.34	74.00	21.60	PK	Vertic	PASS
4	5460	26.55	42.89	16.34	54.00	11.11	AV	Vertic	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level

Test Report

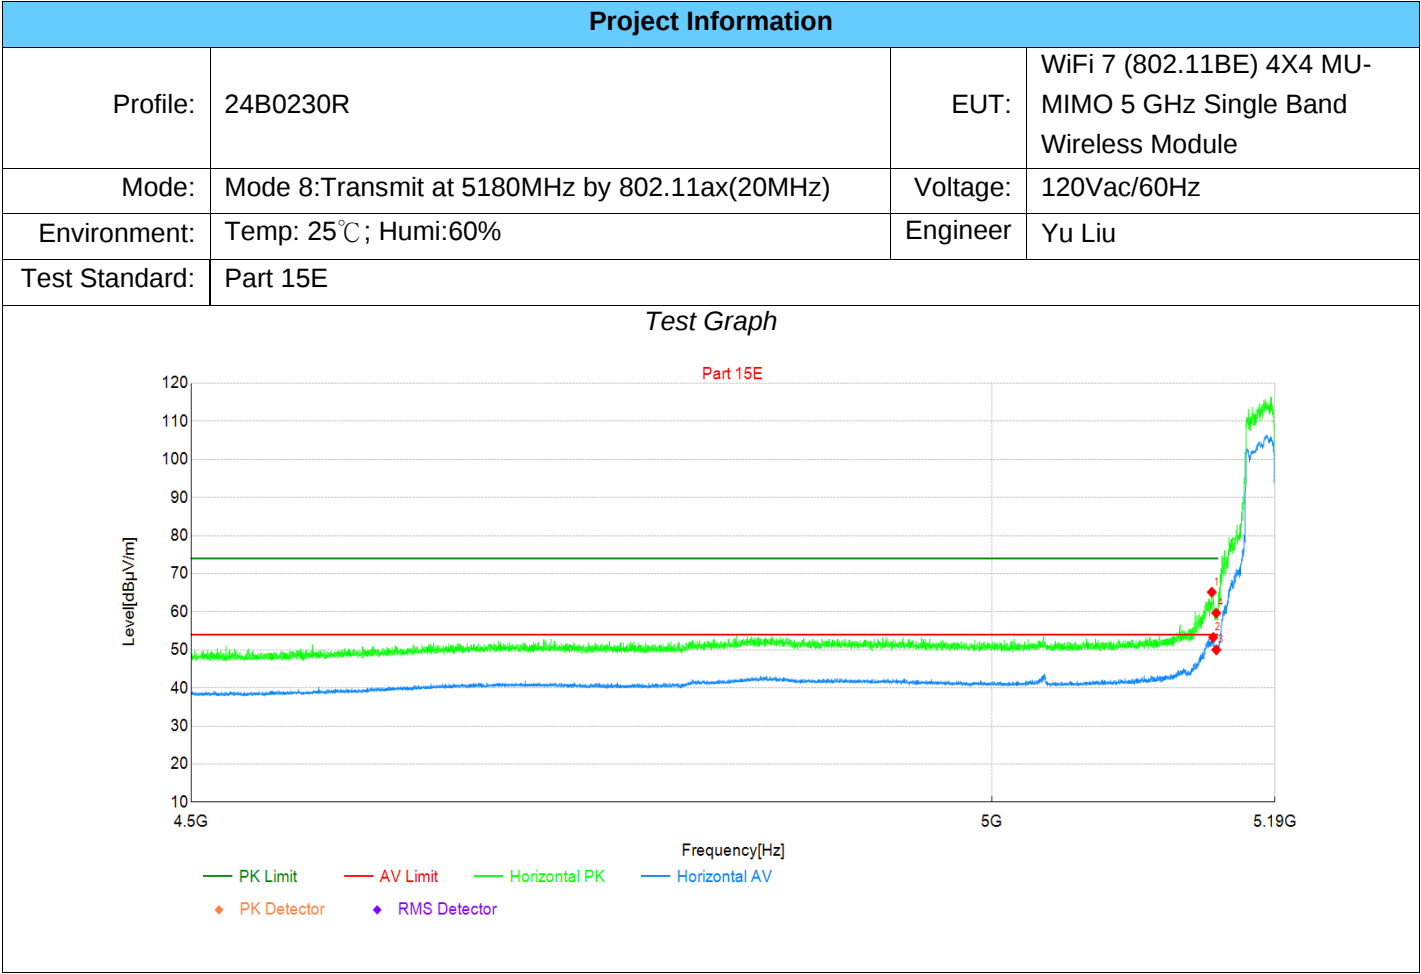

Suspected Data List									
NO	Frequency [MHz]	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Det	Pol	Verdict
1	5147	50.07	65.16	15.09	74.00	8.84	PK	Horizo	PASS
2	5148	38.17	53.27	15.10	54.00	0.73	AV	Horizo	PASS
3	5150	34.90	50.01	15.11	54.00	3.99	AV	Horizo	PASS
4	5150	44.55	59.66	15.11	74.00	14.34	PK	Horizo	PASS


Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level

Test Report

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 8:Transmit at 5180MHz by 802.11ax(20MHz)	Voltage:	120Vac/60Hz
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	Part 15E		

Test Graph

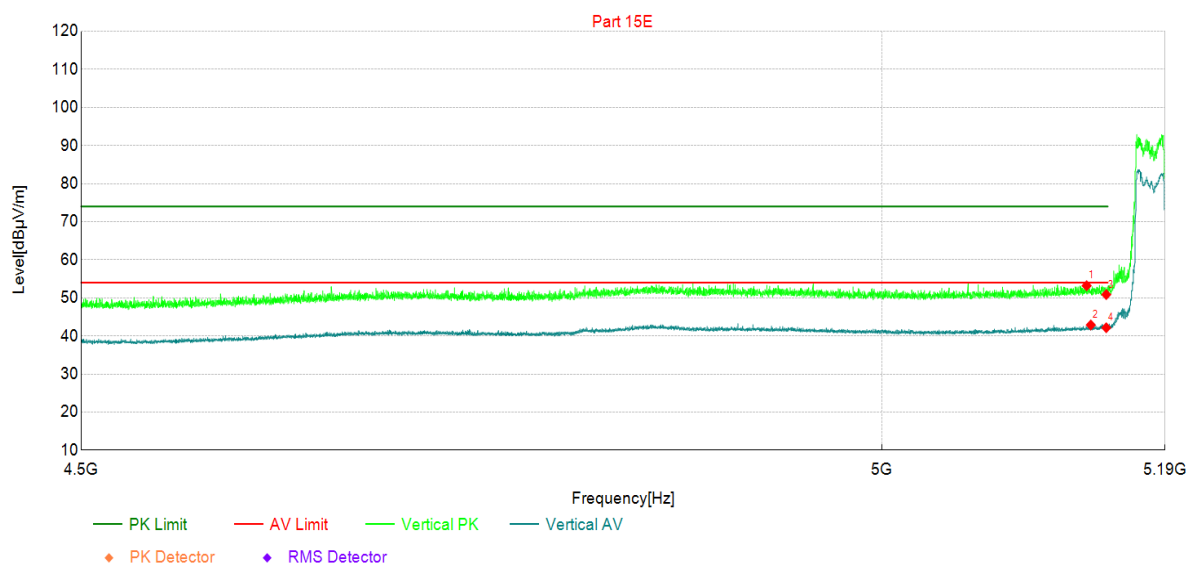


Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5137	38.16	53.19	15.03	74.00	20.81	PK	Vertic	PASS
2	5140	27.82	42.87	15.05	54.00	11.13	AV	Vertic	PASS
3	5150	35.76	50.87	15.11	74.00	23.13	PK	Vertic	PASS
4	5150	27.04	42.15	15.11	54.00	11.85	AV	Vertic	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Test Report

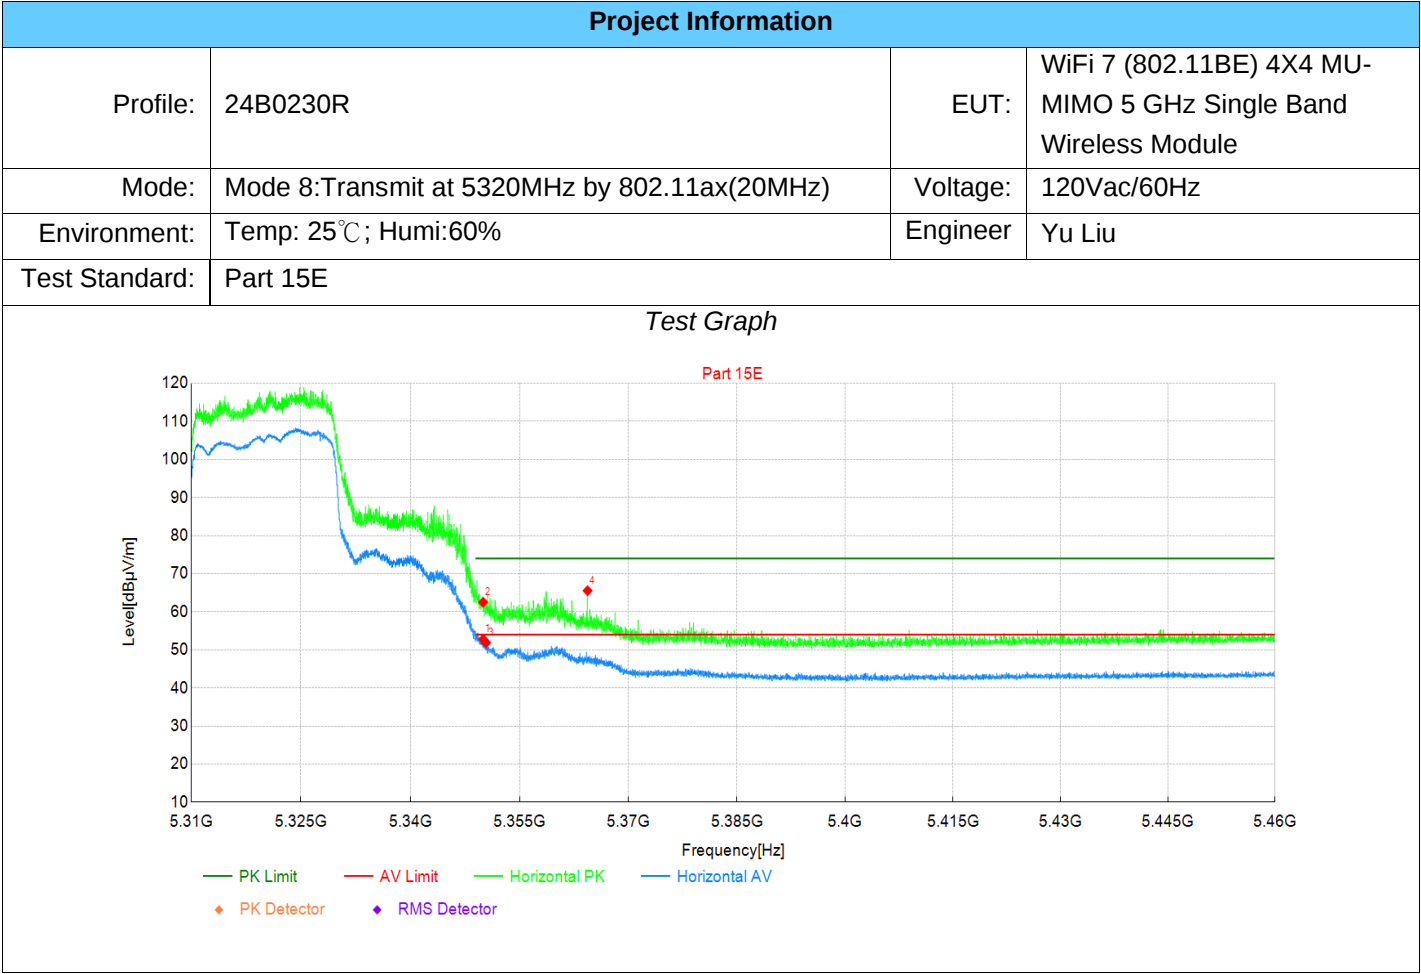

Suspected Data List									
NO	Frequency [MHz]	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Det	Pol	Verdict
1	5350	37.06	52.77	15.71	54.00	1.23	AV	Horizo	PASS
2	5350	46.80	62.51	15.71	74.00	11.49	PK	Horizo	PASS
3	5350	36.20	51.91	15.71	54.00	2.09	AV	Horizo	PASS
4	5364	49.86	65.55	15.69	74.00	8.45	PK	Horizo	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level