


|                                                                     |                          |
|---------------------------------------------------------------------|--------------------------|
| Site: AC1                                                           | Time: 2015/05/07 - 23:50 |
| Limit: FCC_Part15.209_RE(3m)                                        | Engineer: Andy Zhu       |
| Probe: BBHA9120D_1-18GHz                                            | Polarity: Vertical       |
| EUT: 802.11ac Dual Band Module                                      | Power: AC 120V/60Hz      |
| Note: Mode: Transmit at channel 5530MHz by 802.11ac-VHT80 Ant 0+1+2 |                          |

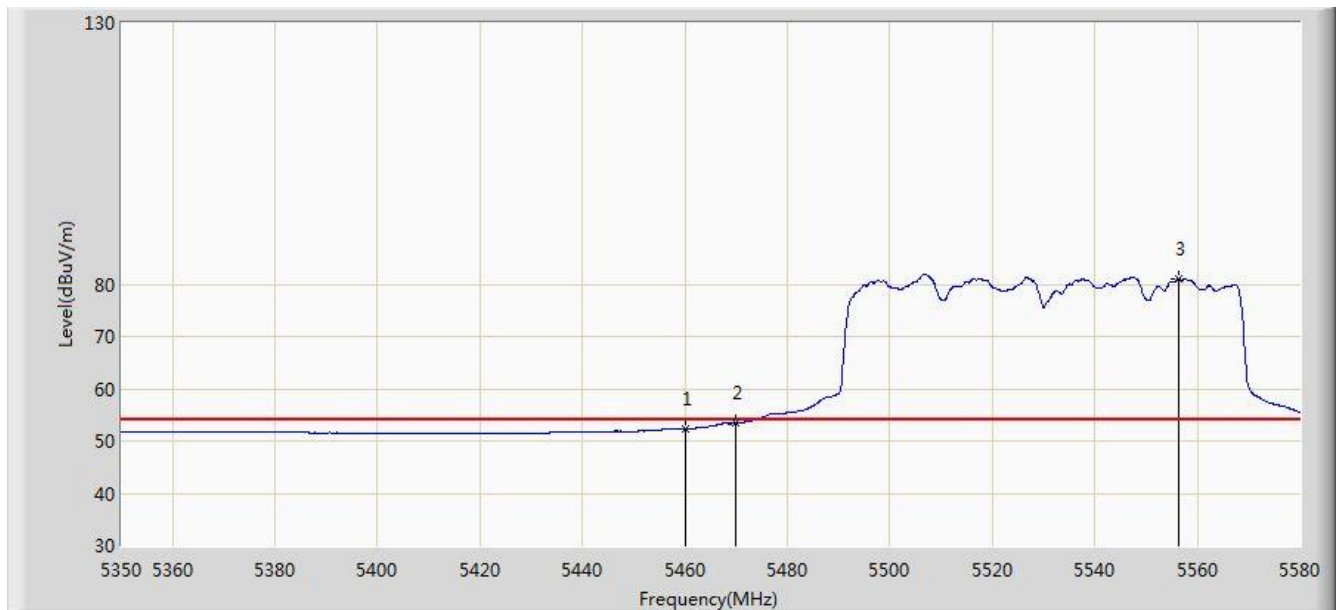


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5460.000        | 52.363                 | 14.800               | -1.637          | 54.000         | 37.563      | AV   |
| 2  |      |      | 5470.000        | 53.382                 | 15.793               | -0.618          | 54.000         | 37.588      | AV   |
| 3  |      | *    | 5556.310        | 81.096                 | 43.390               | N/A             | N/A            | 37.706      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                                     |                          |
|---------------------------------------------------------------------|--------------------------|
| Site: AC1                                                           | Time: 2015/05/08 - 00:10 |
| Limit: FCC_Part15.209_RE(3m)                                        | Engineer: Andy Zhu       |
| Probe: BBHA9120D_1-18GHz                                            | Polarity: Horizontal     |
| EUT: 802.11ac Dual Band Module                                      | Power: AC 120V/60Hz      |
| Note: Mode: Transmit at channel 5775MHz by 802.11ac-VHT80 Ant 0+1+2 |                          |

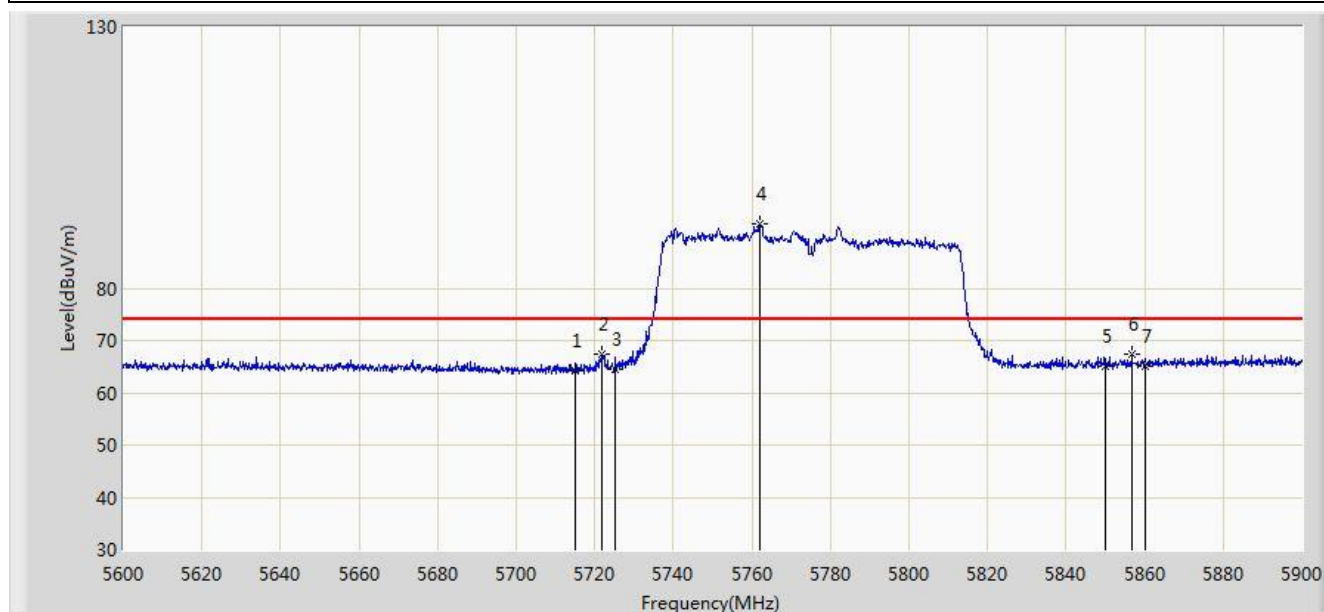


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5715.000        | 64.194                 | 26.245               | -9.806          | 74.000         | 37.949      | PK   |
| 2  |      |      | 5721.650        | 67.299                 | 29.323               | -10.901         | 78.200         | 37.976      | PK   |
| 3  |      |      | 5725.000        | 64.486                 | 26.496               | -13.714         | 78.200         | 37.990      | PK   |
| 4  |      | *    | 5762.000        | 92.319                 | 54.173               | N/A             | N/A            | 38.146      | PK   |
| 5  |      |      | 5850.000        | 65.131                 | 26.678               | -13.069         | 78.200         | 38.454      | PK   |
| 6  |      |      | 5856.800        | 67.438                 | 28.968               | -10.762         | 78.200         | 38.470      | PK   |
| 7  |      |      | 5860.000        | 65.074                 | 26.596               | -8.926          | 74.000         | 38.478      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                                     |                          |
|---------------------------------------------------------------------|--------------------------|
| Site: AC1                                                           | Time: 2015/05/08 - 00:14 |
| Limit: FCC_Part15.209_RE(3m)                                        | Engineer: Andy Zhu       |
| Probe: BBHA9120D_1-18GHz                                            | Polarity: Horizontal     |
| EUT: 802.11ac Dual Band Module                                      | Power: AC 120V/60Hz      |
| Note: Mode: Transmit at channel 5775MHz by 802.11ac-VHT80 Ant 0+1+2 |                          |

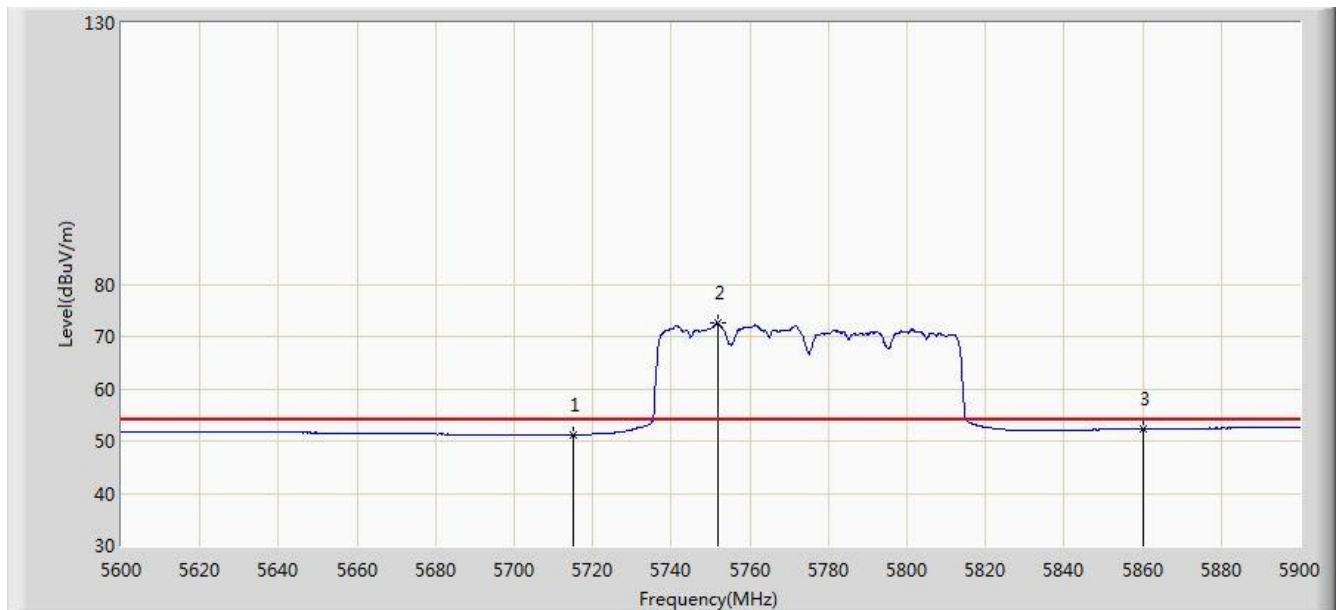


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5715.000        | 51.137                 | 13.188               | -2.863          | 54.000         | 37.949      | AV   |
| 2  |      | *    | 5751.950        | 72.612                 | 34.507               | N/A             | N/A            | 38.105      | AV   |
| 3  |      |      | 5860.000        | 52.307                 | 13.829               | -1.693          | 54.000         | 38.478      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                                     |                          |
|---------------------------------------------------------------------|--------------------------|
| Site: AC1                                                           | Time: 2015/05/08 - 00:05 |
| Limit: FCC_Part15.209_RE(3m)                                        | Engineer: Andy Zhu       |
| Probe: BBHA9120D_1-18GHz                                            | Polarity: Vertical       |
| EUT: 802.11ac Dual Band Module                                      | Power: AC 120V/60Hz      |
| Note: Mode: Transmit at channel 5775MHz by 802.11ac-VHT80 Ant 0+1+2 |                          |

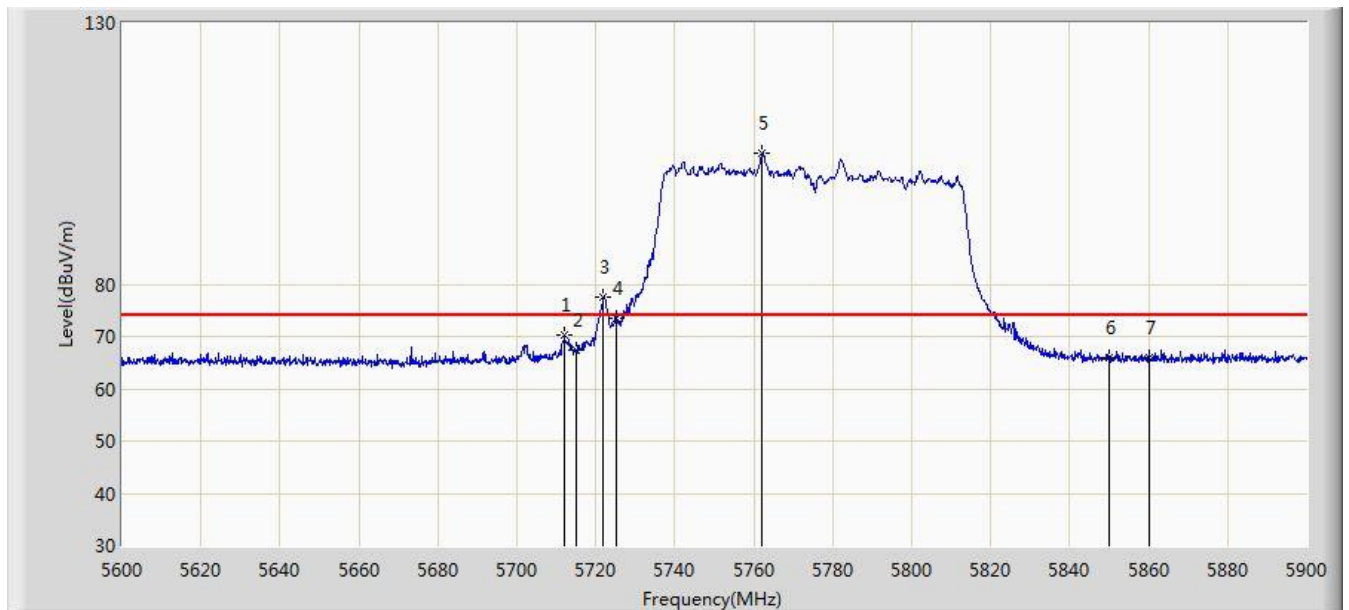


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5712.050        | 70.194                 | 32.257               | -3.806          | 74.000         | 37.938      | PK   |
| 2  |      |      | 5715.000        | 67.389                 | 29.440               | -6.611          | 74.000         | 37.949      | PK   |
| 3  |      |      | 5721.950        | 77.491                 | 39.514               | -0.709          | 78.200         | 37.977      | PK   |
| 4  |      |      | 5725.000        | 73.358                 | 35.368               | -4.842          | 78.200         | 37.990      | PK   |
| 5  |      | *    | 5762.150        | 105.024                | 66.878               | N/A             | N/A            | 38.146      | PK   |
| 6  |      |      | 5850.000        | 66.016                 | 27.563               | -12.184         | 78.200         | 38.454      | PK   |
| 7  |      |      | 5860.000        | 65.910                 | 27.432               | -8.090          | 74.000         | 38.478      | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                                     |                          |
|---------------------------------------------------------------------|--------------------------|
| Site: AC1                                                           | Time: 2015/05/08 - 00:08 |
| Limit: FCC_Part15.209_RE(3m)                                        | Engineer: Andy Zhu       |
| Probe: BBHA9120D_1-18GHz                                            | Polarity: Vertical       |
| EUT: 802.11ac Dual Band Module                                      | Power: AC 120V/60Hz      |
| Note: Mode: Transmit at channel 5775MHz by 802.11ac-VHT80 Ant 0+1+2 |                          |

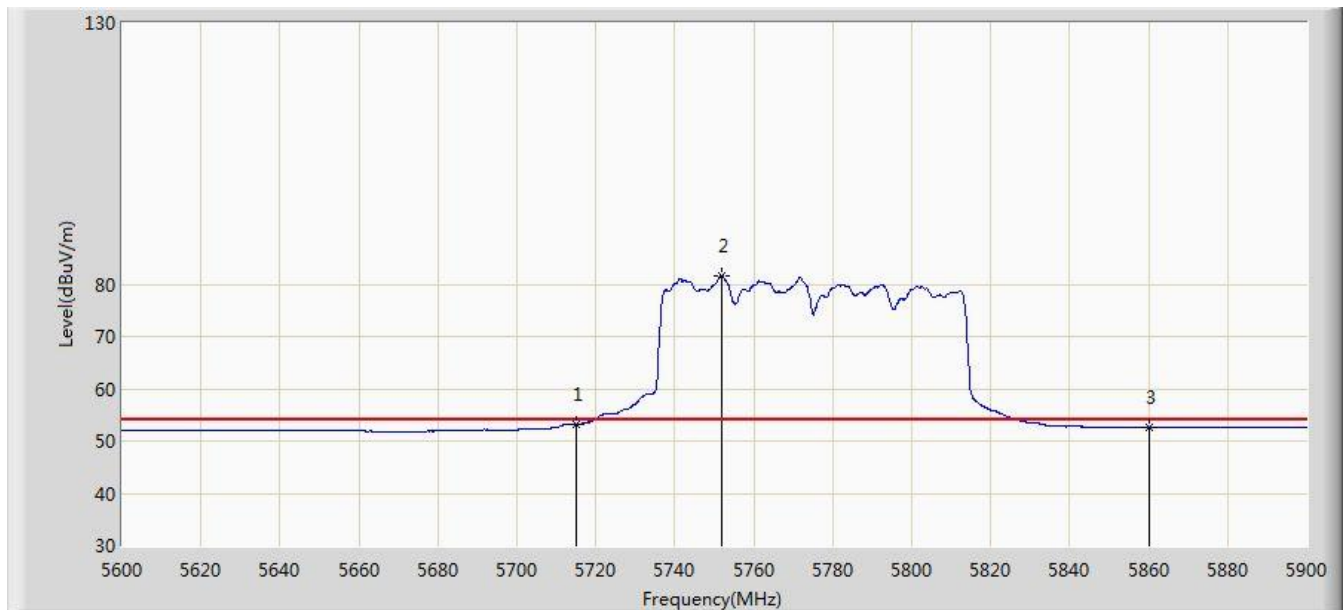


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5715.000        | 53.071                 | 15.122               | -0.929          | 54.000         | 37.949      | AV   |
| 2  |      | *    | 5751.950        | 81.634                 | 43.529               | N/A             | N/A            | 38.105      | AV   |
| 3  |      |      | 5860.000        | 52.609                 | 14.131               | -1.391          | 54.000         | 38.478      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

### Panel Antenna 2# and 3#

|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC1                                               | Time: 2015/05/08 - 02:35 |
| Limit: FCC_Part15.209_RE(3m)                            | Engineer: Milo Li        |
| Probe: BBHA9120D_1-18GHz                                | Polarity: Horizontal     |
| EUT: 802.11ac Dual Band Module                          | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11a at Channel 5180MHz Ant 0 |                          |

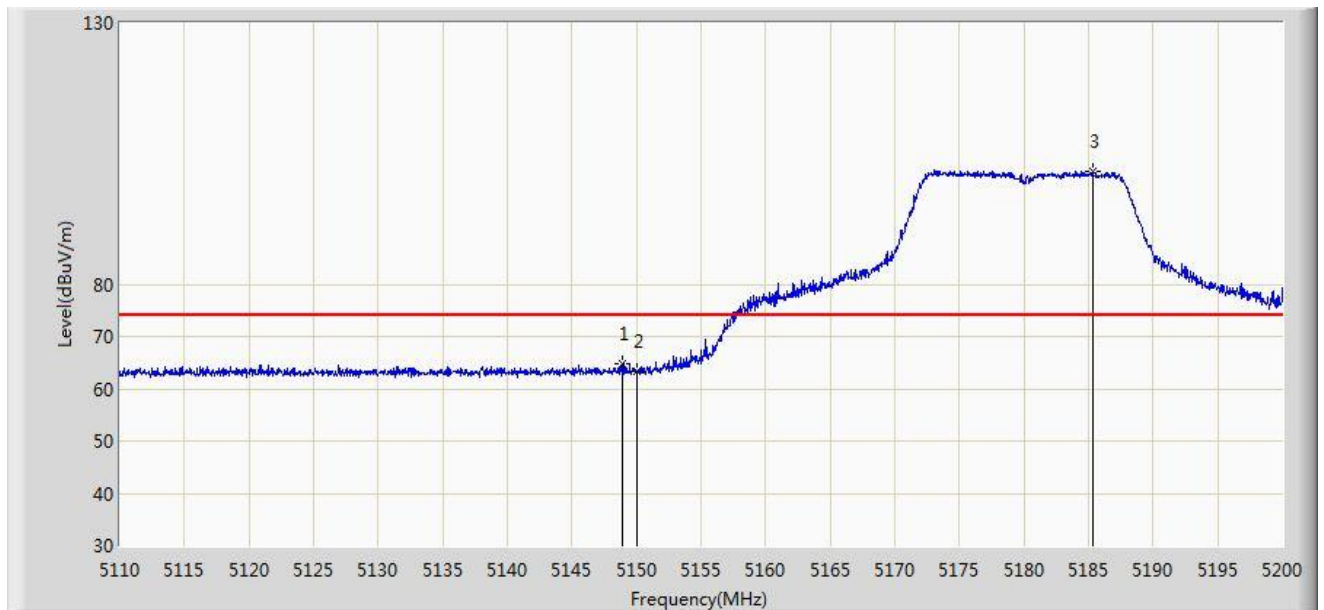


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5148.880        | 64.873                 | 27.420               | -9.127          | 74.000         | 37.454      | PK   |
| 2  |      |      | 5150.000        | 63.381                 | 25.929               | -10.619         | 74.000         | 37.452      | PK   |
| 3  |      | *    | 5185.330        | 101.717                | 64.356               | N/A             | N/A            | 37.361      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC1                                               | Time: 2015/05/08 - 02:37 |
| Limit: FCC_Part15.209_RE(3m)                            | Engineer: Milo Li        |
| Probe: BBHA9120D_1-18GHz                                | Polarity: Horizontal     |
| EUT: 802.11ac Dual Band Module                          | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11a at Channel 5180MHz Ant 0 |                          |

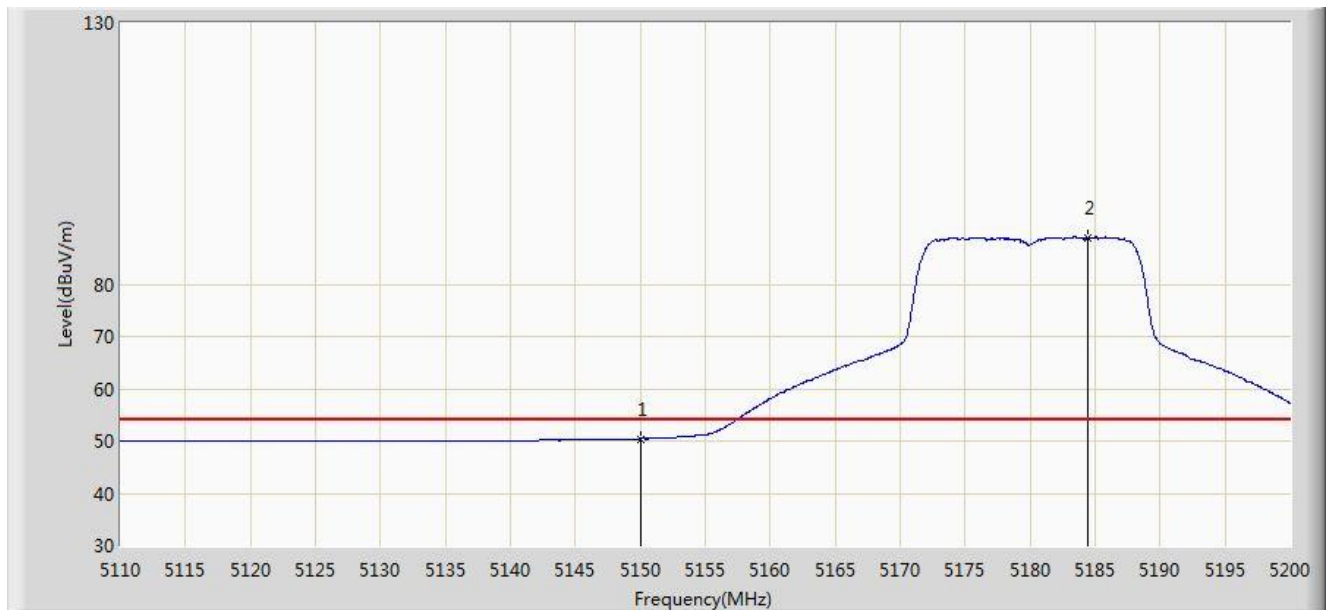


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5150.000        | 50.433                 | 12.981               | -3.567          | 54.000         | 37.452      | AV   |
| 2  |      | *    | 5184.430        | 88.914                 | 51.551               | N/A             | N/A            | 37.363      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC1                                               | Time: 2015/05/08 - 02:17 |
| Limit: FCC_Part15.209_RE(3m)                            | Engineer: Milo Li        |
| Probe: BBHA9120D_1-18GHz                                | Polarity: Vertical       |
| EUT: 802.11ac Dual Band Module                          | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11a at Channel 5180MHz Ant 0 |                          |

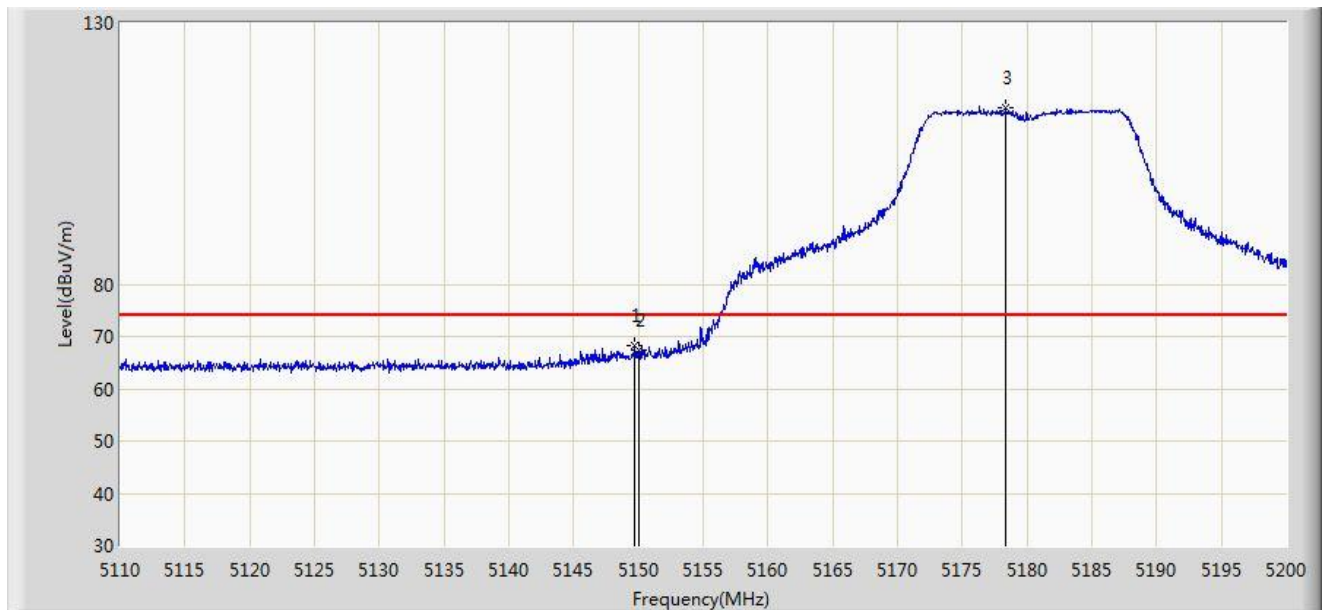


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5149.735        | 68.136                 | 30.684               | -5.864          | 74.000         | 37.452      | PK   |
| 2  |      |      | 5150.000        | 67.329                 | 29.877               | -6.671          | 74.000         | 37.452      | PK   |
| 3  |      | *    | 5178.400        | 113.827                | 76.450               | N/A             | N/A            | 37.378      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC1                                               | Time: 2015/05/08 - 02:30 |
| Limit: FCC_Part15.209_RE(3m)                            | Engineer: Milo Li        |
| Probe: BBHA9120D_1-18GHz                                | Polarity: Vertical       |
| EUT: 802.11ac Dual Band Module                          | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11a at Channel 5180MHz Ant 0 |                          |

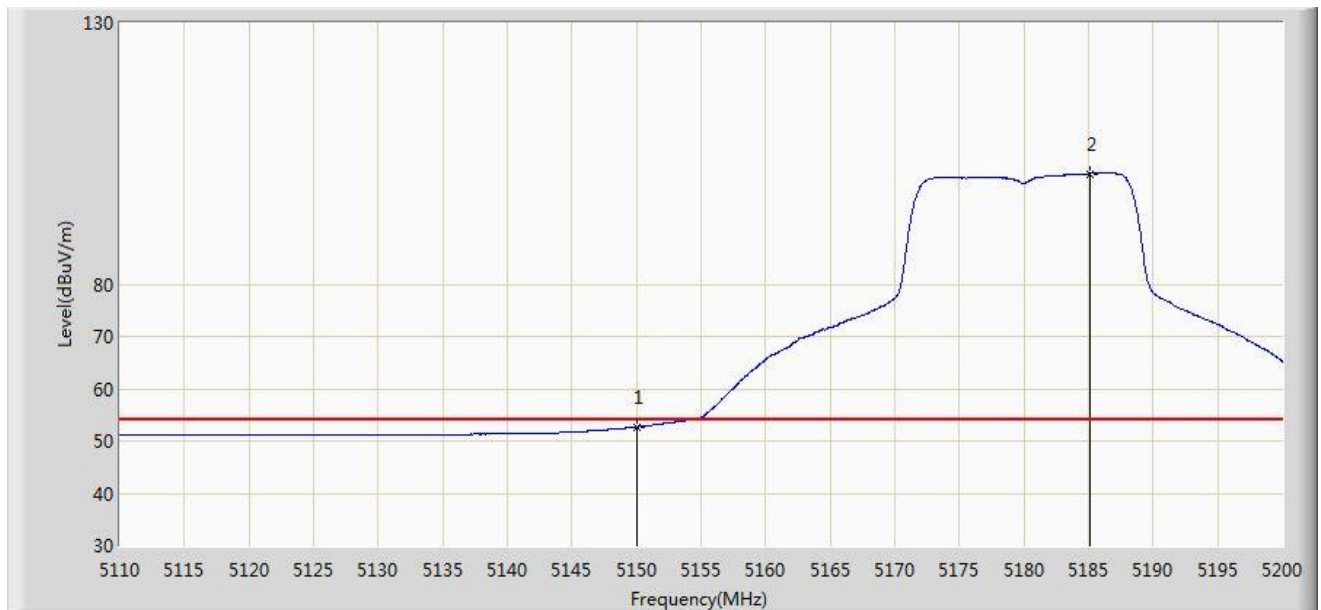


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5150.000        | 52.719                 | 15.267               | -1.281          | 54.000         | 37.452      | AV   |
| 2  |      | *    | 5185.105        | 101.155                | 63.794               | N/A             | N/A            | 37.361      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC1                                               | Time: 2015/05/08 - 02:44 |
| Limit: FCC_Part15.209_RE(3m)                            | Engineer: Milo Li        |
| Probe: BBHA9120D_1-18GHz                                | Polarity: Horizontal     |
| EUT: 802.11ac Dual Band Module                          | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11a at Channel 5320MHz Ant 0 |                          |

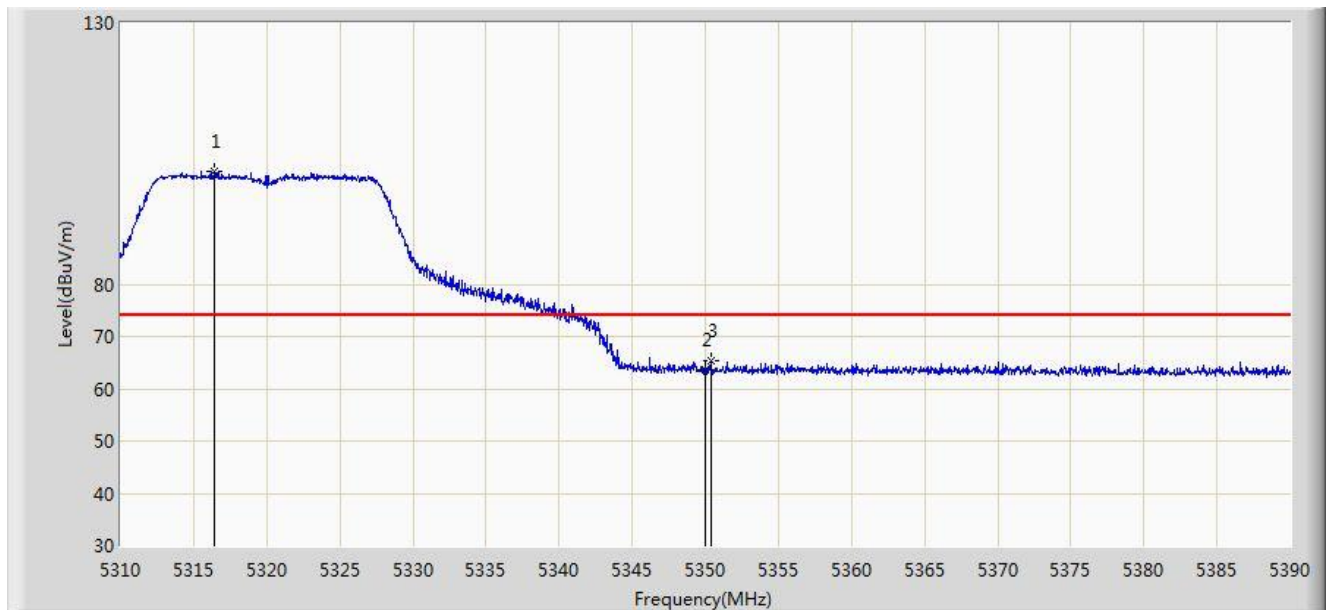


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5316.440        | 101.673                | 64.466               | N/A             | N/A            | 37.207      | PK   |
| 2  |      |      | 5350.000        | 63.484                 | 26.198               | -10.516         | 74.000         | 37.286      | PK   |
| 3  |      |      | 5350.360        | 65.377                 | 28.089               | -8.623          | 74.000         | 37.288      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC1                                               | Time: 2015/05/08 - 02:46 |
| Limit: FCC_Part15.209_RE(3m)                            | Engineer: Milo Li        |
| Probe: BBHA9120D_1-18GHz                                | Polarity: Horizontal     |
| EUT: 802.11ac Dual Band Module                          | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11a at Channel 5320MHz Ant 0 |                          |

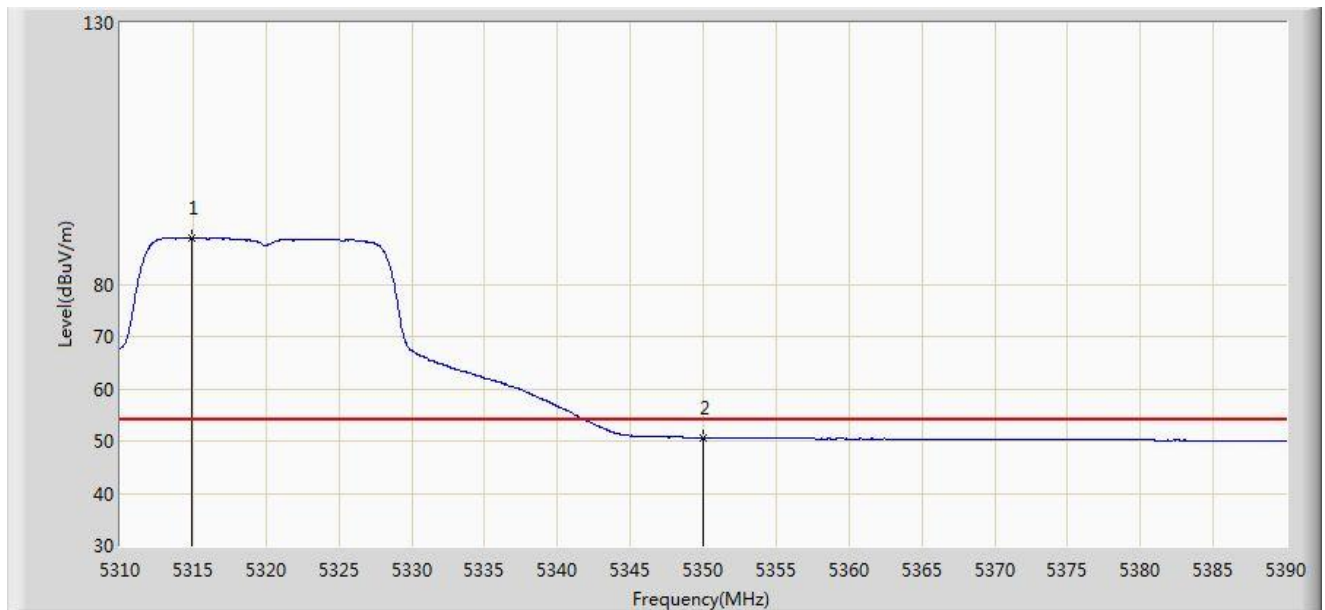


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5314.920        | 88.942                 | 51.738               | N/A             | N/A            | 37.205      | AV   |
| 2  |      |      | 5350.000        | 50.651                 | 13.365               | -3.349          | 54.000         | 37.286      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC1                                               | Time: 2015/05/08 - 02:43 |
| Limit: FCC_Part15.209_RE(3m)                            | Engineer: Milo Li        |
| Probe: BBHA9120D_1-18GHz                                | Polarity: Vertical       |
| EUT: 802.11ac Dual Band Module                          | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11a at Channel 5320MHz Ant 0 |                          |

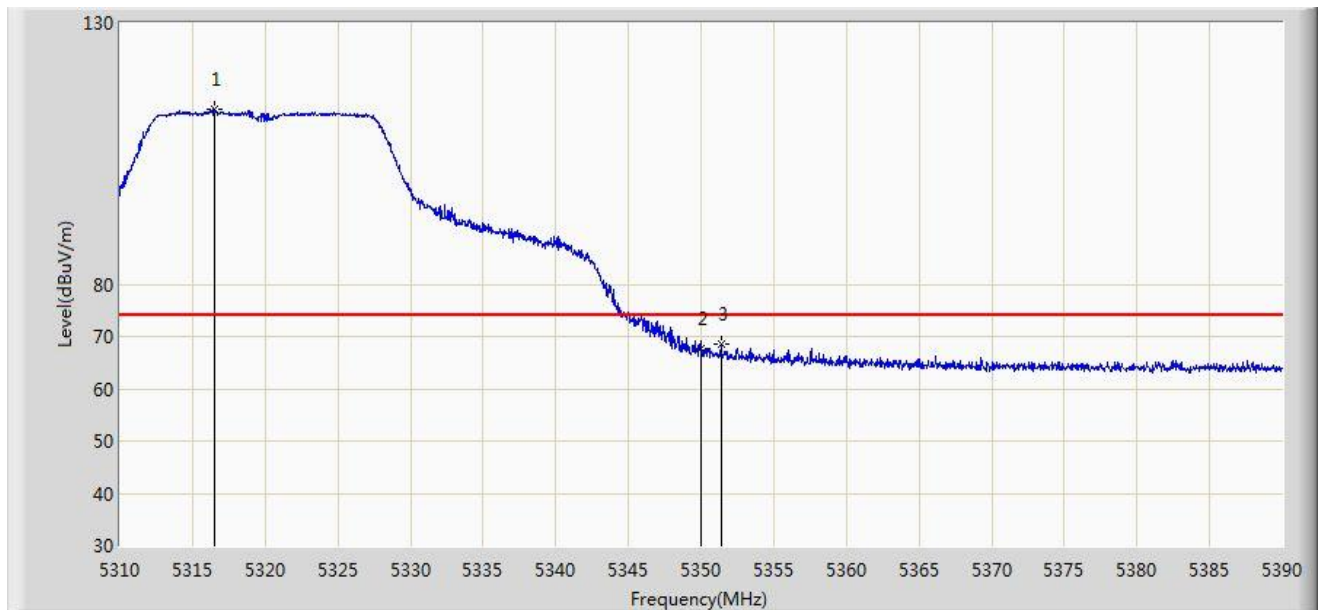


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5316.560        | 113.511                | 76.304               | N/A             | N/A            | 37.208      | PK   |
| 2  |      |      | 5350.000        | 67.658                 | 30.372               | -6.342          | 74.000         | 37.286      | PK   |
| 3  |      |      | 5351.400        | 68.474                 | 31.183               | -5.526          | 74.000         | 37.291      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC1                                               | Time: 2015/05/08 - 02:42 |
| Limit: FCC_Part15.209_RE(3m)                            | Engineer: Milo Li        |
| Probe: BBHA9120D_1-18GHz                                | Polarity: Vertical       |
| EUT: 802.11ac Dual Band Module                          | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11a at Channel 5320MHz Ant 0 |                          |

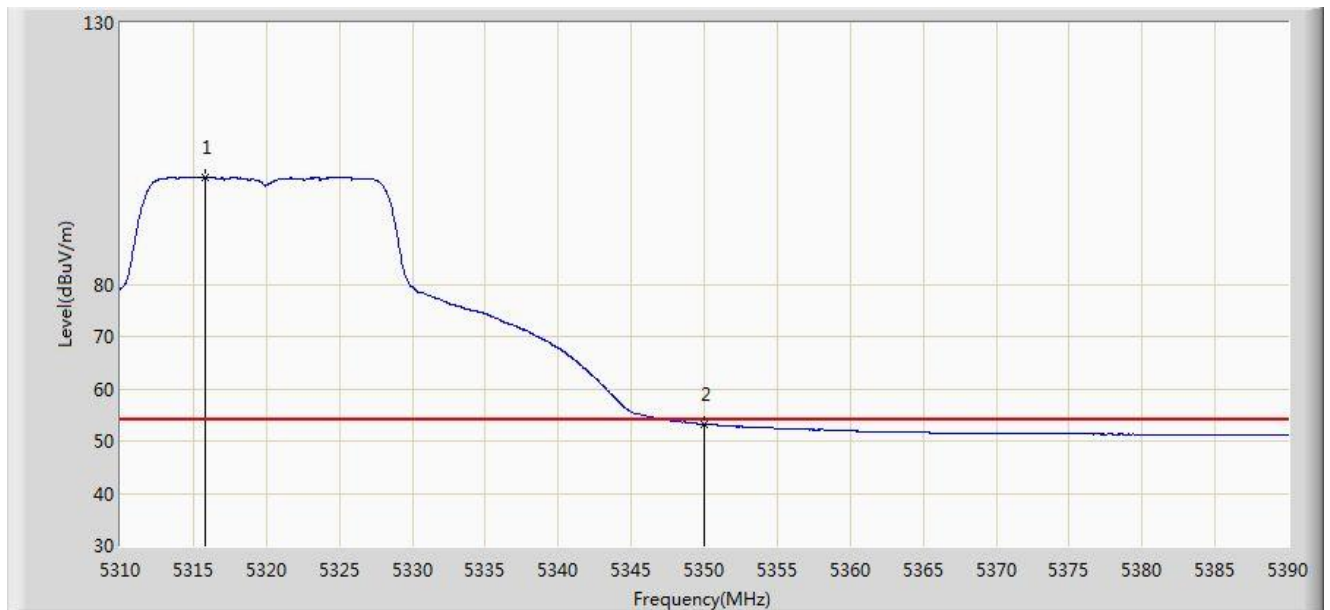


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5315.800        | 100.398                | 63.192               | N/A             | N/A            | 37.206      | AV   |
| 2  |      |      | 5350.000        | 53.248                 | 15.962               | -0.752          | 54.000         | 37.286      | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC1                                               | Time: 2015/05/08 - 02:58 |
| Limit: FCC_Part15.209_RE(3m)                            | Engineer: Milo Li        |
| Probe: BBHA9120D_1-18GHz                                | Polarity: Horizontal     |
| EUT: 802.11ac Dual Band Module                          | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11a at Channel 5500MHz Ant 0 |                          |

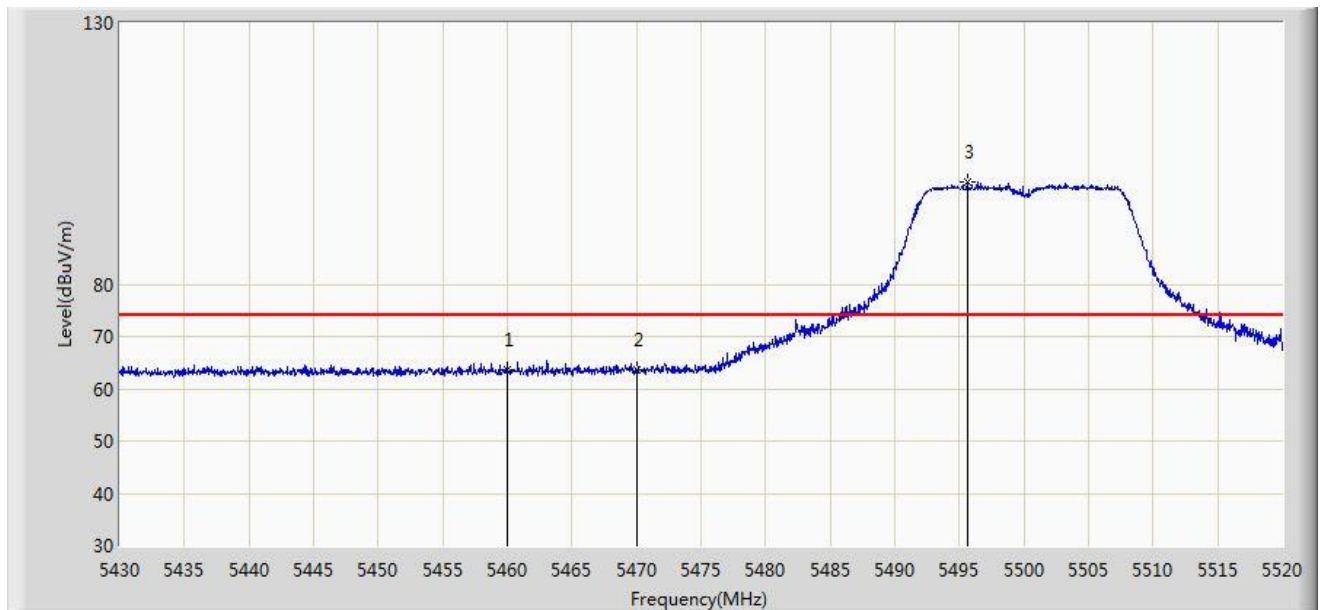


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5460.000        | 63.488                 | 25.925               | -10.512         | 74.000         | 37.563      | PK   |
| 2  |      |      | 5470.000        | 63.509                 | 25.920               | -10.491         | 74.000         | 37.588      | PK   |
| 3  |      | *    | 5495.610        | 99.563                 | 61.943               | N/A             | N/A            | 37.619      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC1                                               | Time: 2015/05/08 - 03:00 |
| Limit: FCC_Part15.209_RE(3m)                            | Engineer: Milo Li        |
| Probe: BBHA9120D_1-18GHz                                | Polarity: Horizontal     |
| EUT: 802.11ac Dual Band Module                          | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11a at Channel 5500MHz Ant 0 |                          |

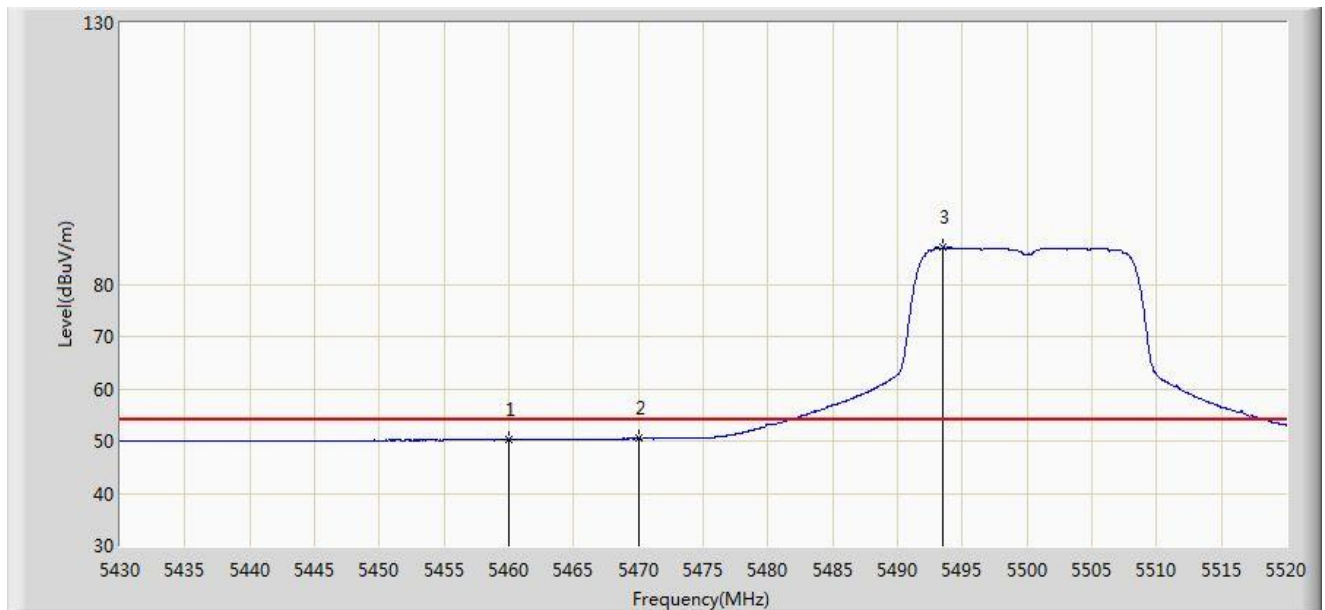


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5460.000        | 50.244                 | 12.681               | -3.756          | 54.000         | 37.563      | AV   |
| 2  |      |      | 5470.000        | 50.455                 | 12.866               | -3.545          | 54.000         | 37.588      | AV   |
| 3  |      | *    | 5493.540        | 86.989                 | 49.372               | N/A             | N/A            | 37.617      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC1                                               | Time: 2015/05/08 - 02:51 |
| Limit: FCC_Part15.209_RE(3m)                            | Engineer: Milo Li        |
| Probe: BBHA9120D_1-18GHz                                | Polarity: Vertical       |
| EUT: 802.11ac Dual Band Module                          | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11a at Channel 5500MHz Ant 0 |                          |

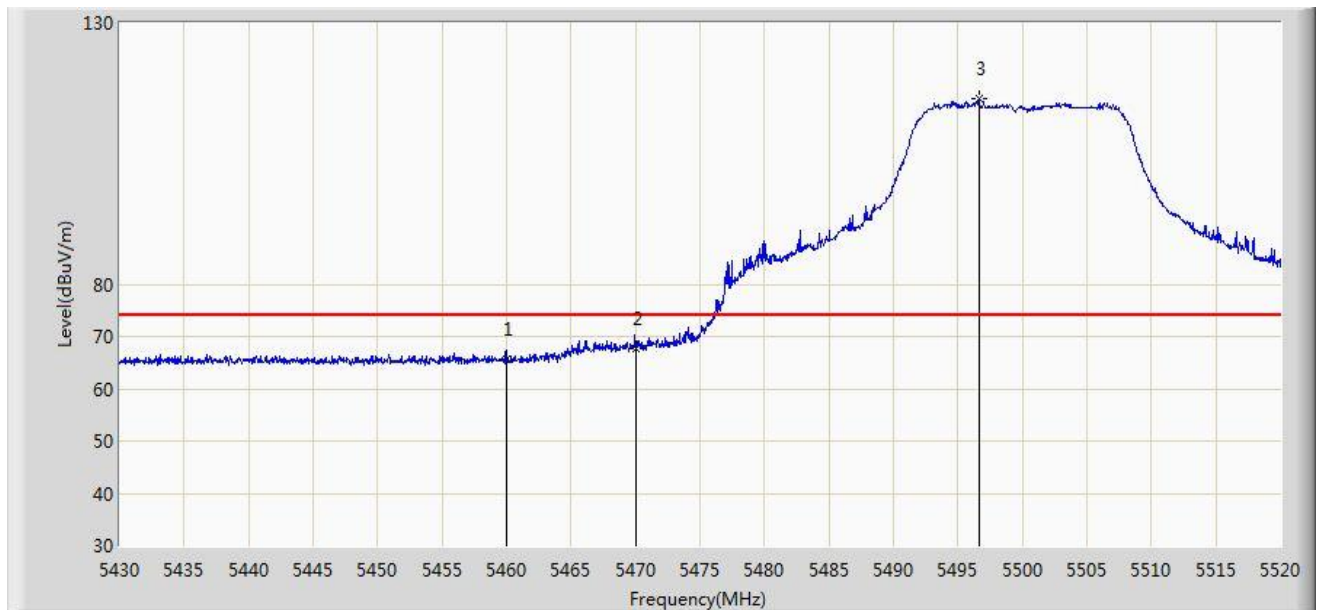


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5460.000        | 65.670                 | 28.107               | -8.330          | 74.000         | 37.563      | PK   |
| 2  |      |      | 5470.000        | 67.820                 | 30.231               | -6.180          | 74.000         | 37.588      | PK   |
| 3  |      | *    | 5496.600        | 115.638                | 78.017               | N/A             | N/A            | 37.621      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC1                                               | Time: 2015/05/08 - 02:51 |
| Limit: FCC_Part15.209_RE(3m)                            | Engineer: Milo Li        |
| Probe: BBHA9120D_1-18GHz                                | Polarity: Vertical       |
| EUT: 802.11ac Dual Band Module                          | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11a at Channel 5500MHz Ant 0 |                          |

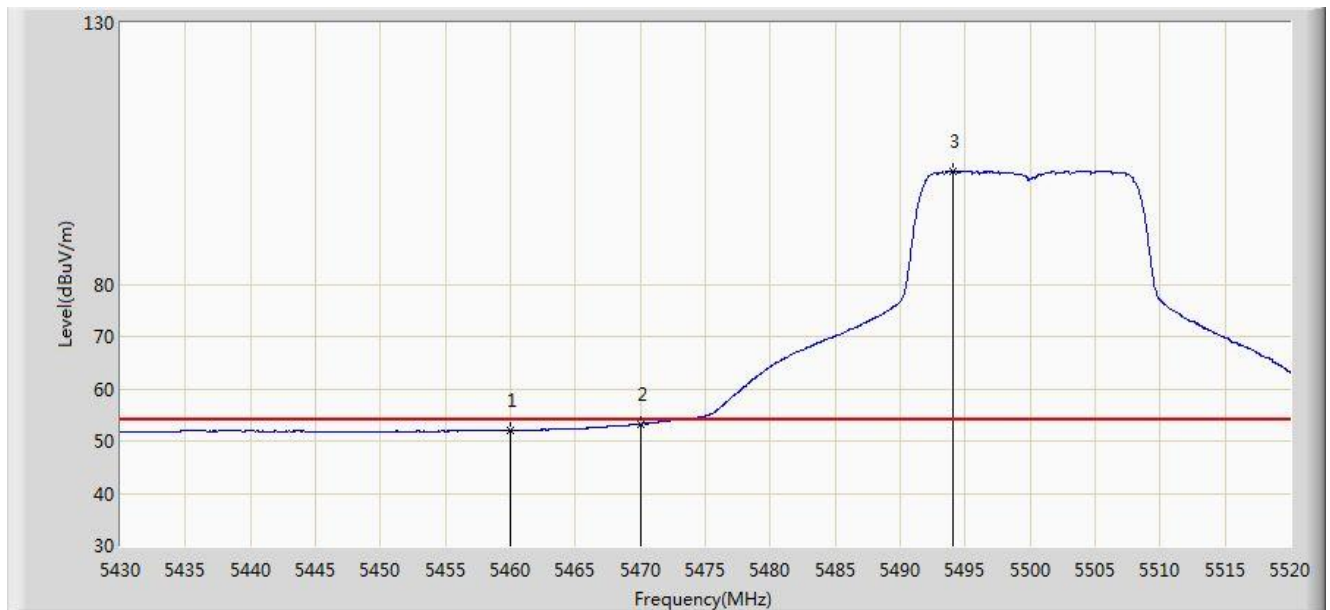


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5460.000        | 51.966                 | 14.403               | -2.034          | 54.000         | 37.563      | AV   |
| 2  |      |      | 5470.000        | 53.286                 | 15.697               | -0.714          | 54.000         | 37.588      | AV   |
| 3  |      | *    | 5494.080        | 101.609                | 63.991               | N/A             | N/A            | 37.618      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC1                                               | Time: 2015/05/08 - 03:09 |
| Limit: FCC_Part15.209_RE(3m)                            | Engineer: Milo Li        |
| Probe: BBHA9120D_1-18GHz                                | Polarity: Horizontal     |
| EUT: 802.11ac Dual Band Module                          | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11a at Channel 5700MHz Ant 0 |                          |

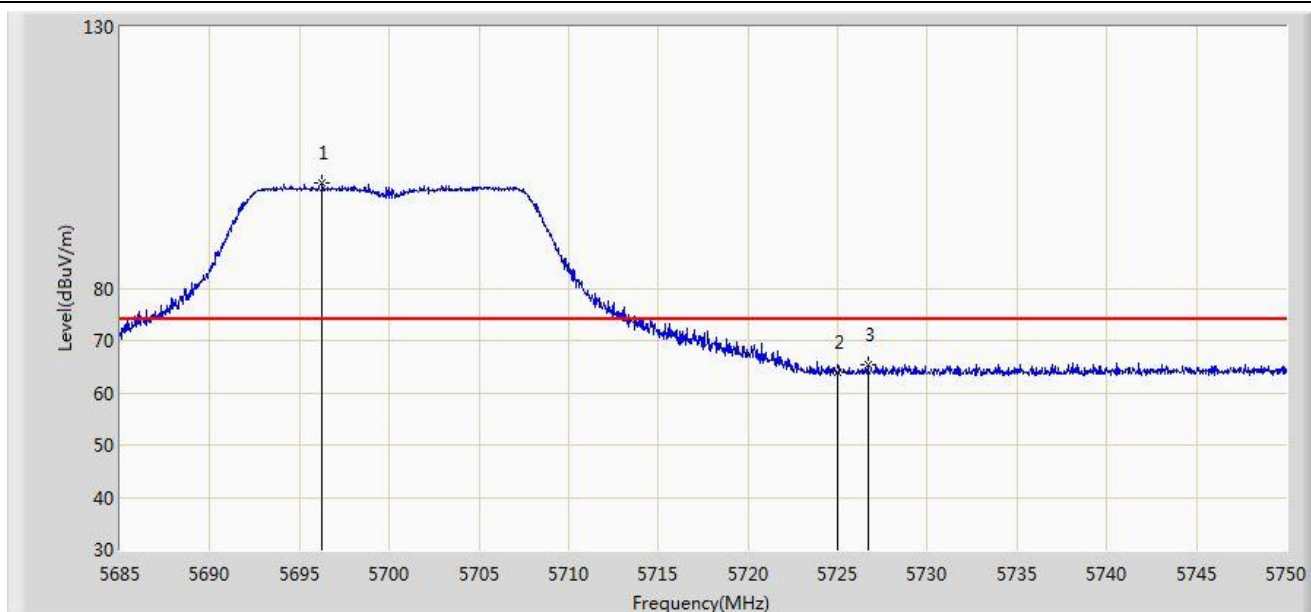


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5696.277        | 100.264                | 62.381               | N/A             | N/A            | 37.883      | PK   |
| 2  |      |      | 5725.000        | 63.773                 | 25.783               | -10.227         | 74.000         | 37.990      | PK   |
| 3  |      |      | 5726.665        | 65.438                 | 27.442               | -8.562          | 74.000         | 37.996      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC1                                               | Time: 2015/05/08 - 03:11 |
| Limit: FCC_Part15.209_RE(3m)                            | Engineer: Milo Li        |
| Probe: BBHA9120D_1-18GHz                                | Polarity: Horizontal     |
| EUT: 802.11ac Dual Band Module                          | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11a at Channel 5700MHz Ant 0 |                          |

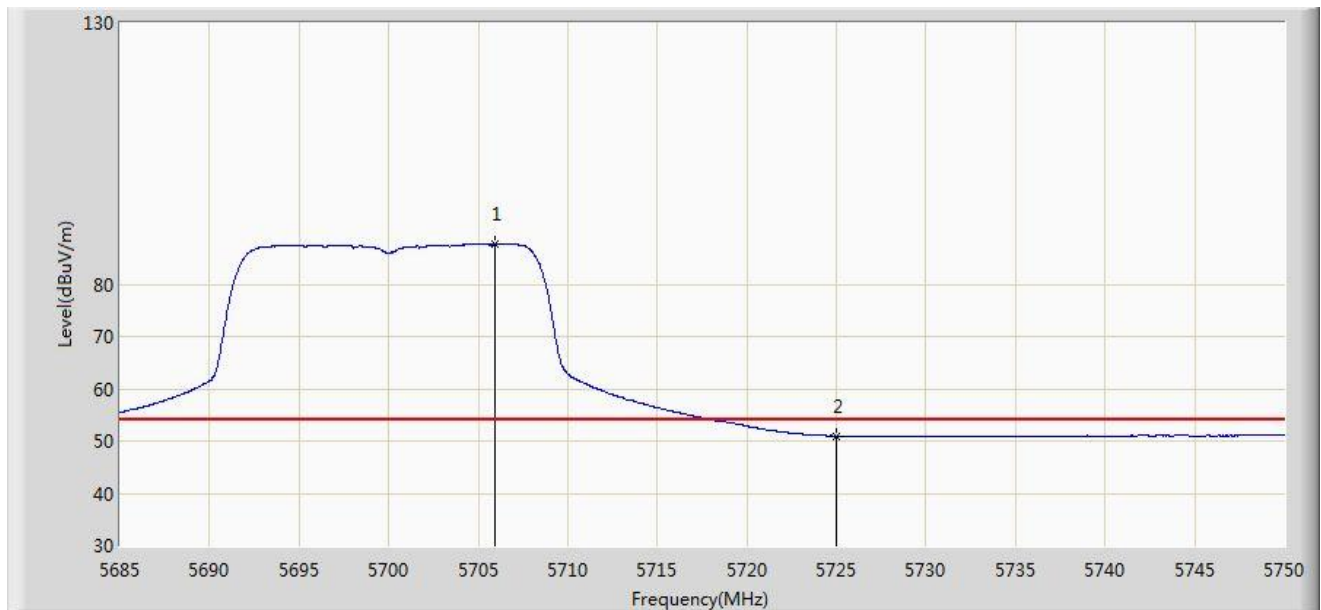


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5705.897        | 87.614                 | 49.702               | N/A             | N/A            | 37.912      | AV   |
| 2  |      |      | 5725.000        | 50.999                 | 13.009               | -3.001          | 54.000         | 37.990      | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC1                                               | Time: 2015/05/08 - 03:09 |
| Limit: FCC_Part15.209_RE(3m)                            | Engineer: Milo Li        |
| Probe: BBHA9120D_1-18GHz                                | Polarity: Vertical       |
| EUT: 802.11ac Dual Band Module                          | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11a at Channel 5700MHz Ant 0 |                          |

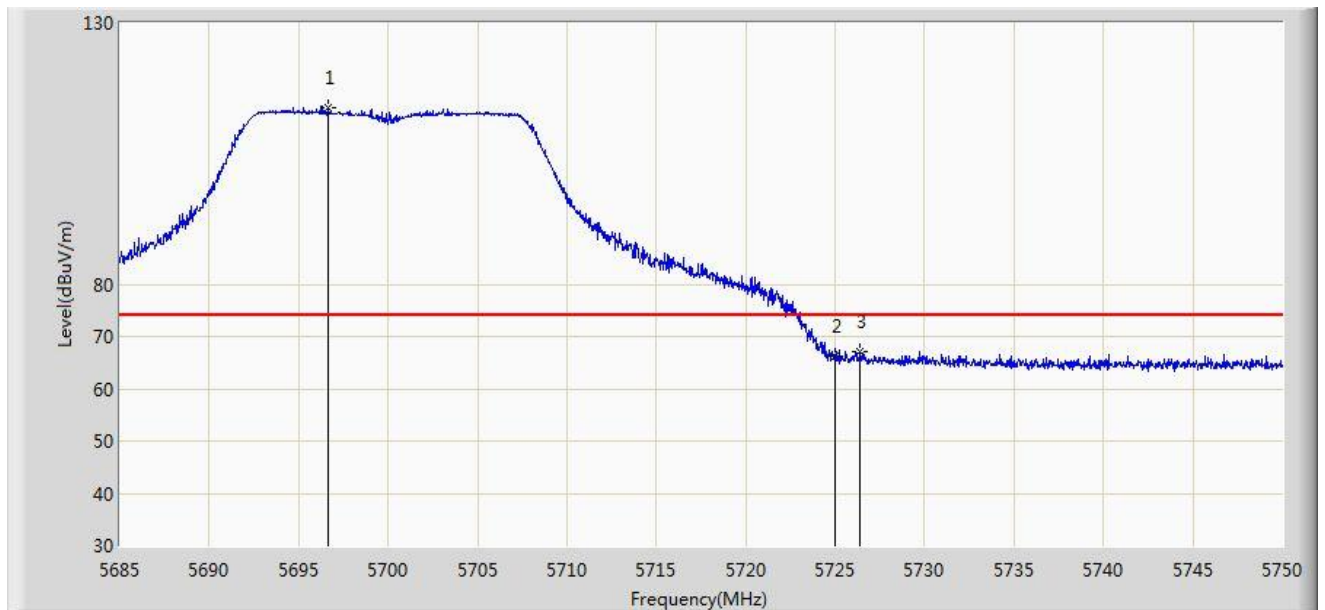


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5696.635        | 113.710                | 75.826               | N/A             | N/A            | 37.884      | PK   |
| 2  |      |      | 5725.000        | 66.169                 | 28.179               | -7.831          | 74.000         | 37.990      | PK   |
| 3  |      |      | 5726.405        | 67.203                 | 29.208               | -6.797          | 74.000         | 37.995      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC1                                               | Time: 2015/05/08 - 03:08 |
| Limit: FCC_Part15.209_RE(3m)                            | Engineer: Milo Li        |
| Probe: BBHA9120D_1-18GHz                                | Polarity: Vertical       |
| EUT: 802.11ac Dual Band Module                          | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11a at Channel 5700MHz Ant 0 |                          |

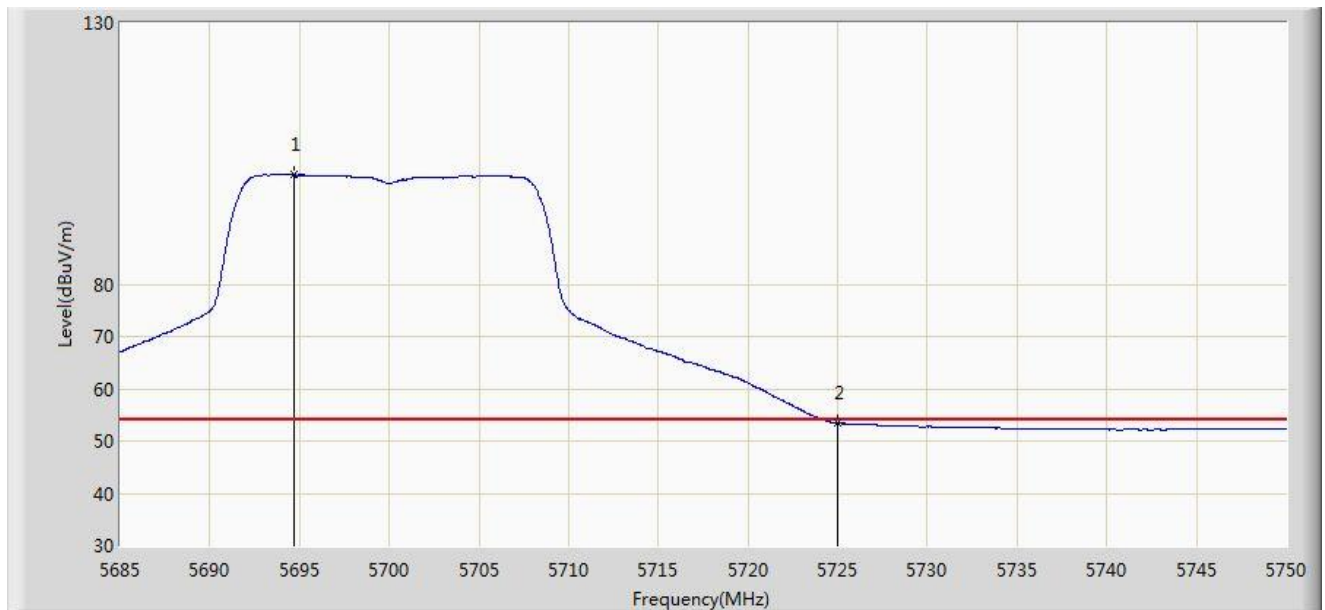


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5694.685        | 101.029                | 63.150               | N/A             | N/A            | 37.879      | AV   |
| 2  |      |      | 5725.000        | 53.400                 | 15.410               | -0.600          | 54.000         | 37.990      | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC1                                               | Time: 2015/05/08 - 03:18 |
| Limit: FCC_Part15.209_RE(3m)                            | Engineer: Milo Li        |
| Probe: BBHA9120D_1-18GHz                                | Polarity: Horizontal     |
| EUT: 802.11ac Dual Band Module                          | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11a at Channel 5745MHz Ant 0 |                          |

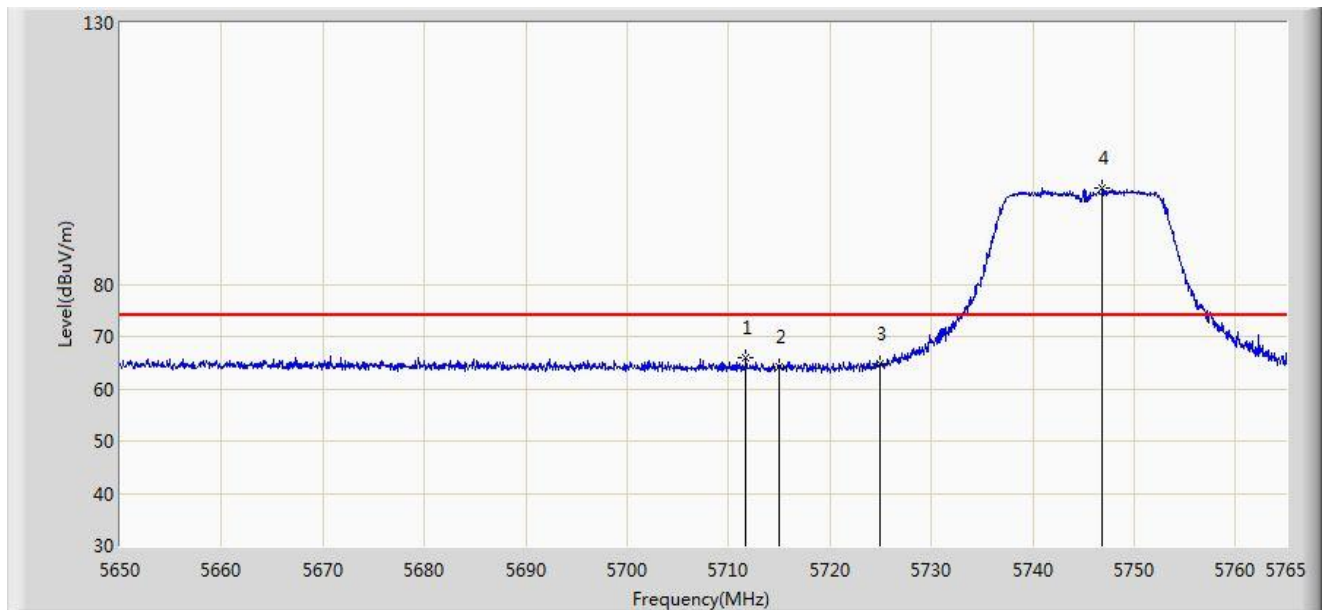


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5711.697        | 65.925                 | 27.989               | -8.075          | 74.000         | 37.936      | PK   |
| 2  |      |      | 5715.000        | 64.096                 | 26.147               | -9.904          | 74.000         | 37.949      | PK   |
| 3  |      |      | 5725.000        | 64.716                 | 26.726               | - 13.484        | 78.200         | 37.990      | PK   |
| 4  |      | *    | 5746.888        | 98.300                 | 60.219               | N/A             | N/A            | 38.081      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC1                                               | Time: 2015/05/08 - 03:20 |
| Limit: FCC_Part15.209_RE(3m)                            | Engineer: Milo Li        |
| Probe: BBHA9120D_1-18GHz                                | Polarity: Horizontal     |
| EUT: 802.11ac Dual Band Module                          | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11a at Channel 5745MHz Ant 0 |                          |

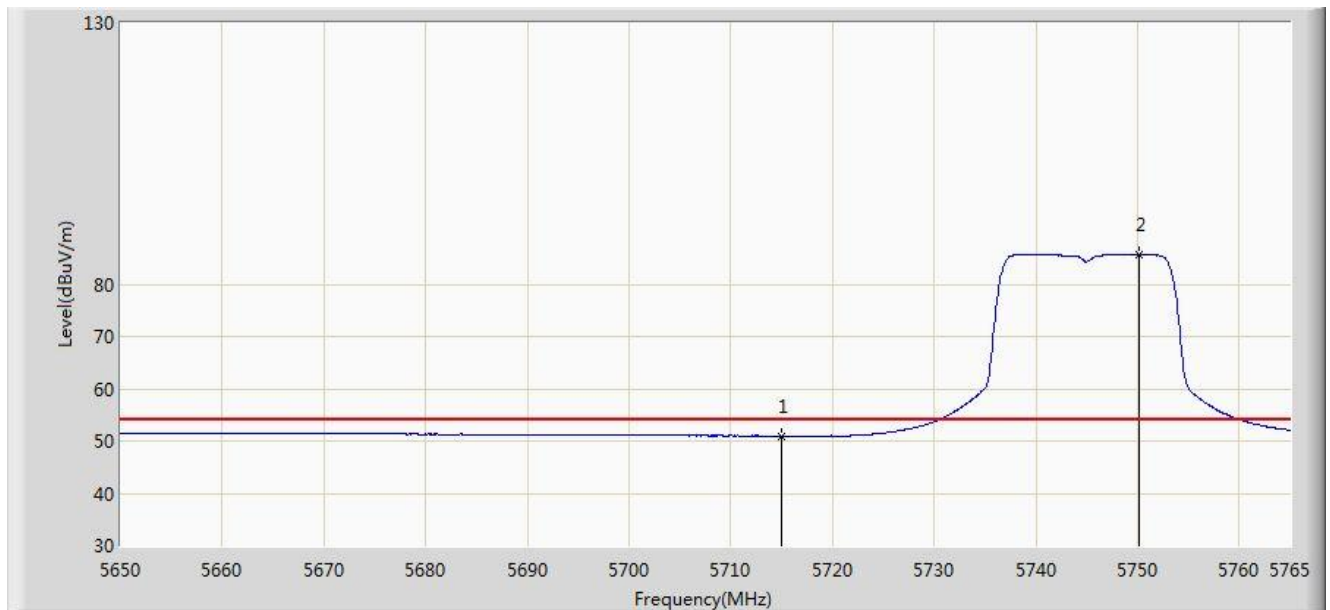


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5715.000        | 50.954                 | 13.005               | -3.046          | 54.000         | 37.949      | AV   |
| 2  |      | *    | 5750.107        | 85.696                 | 47.600               | N/A             | N/A            | 38.097      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC1                                               | Time: 2015/05/08 - 03:16 |
| Limit: FCC_Part15.209_RE(3m)                            | Engineer: Milo Li        |
| Probe: BBHA9120D_1-18GHz                                | Polarity: Vertical       |
| EUT: 802.11ac Dual Band Module                          | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11a at Channel 5745MHz Ant 0 |                          |

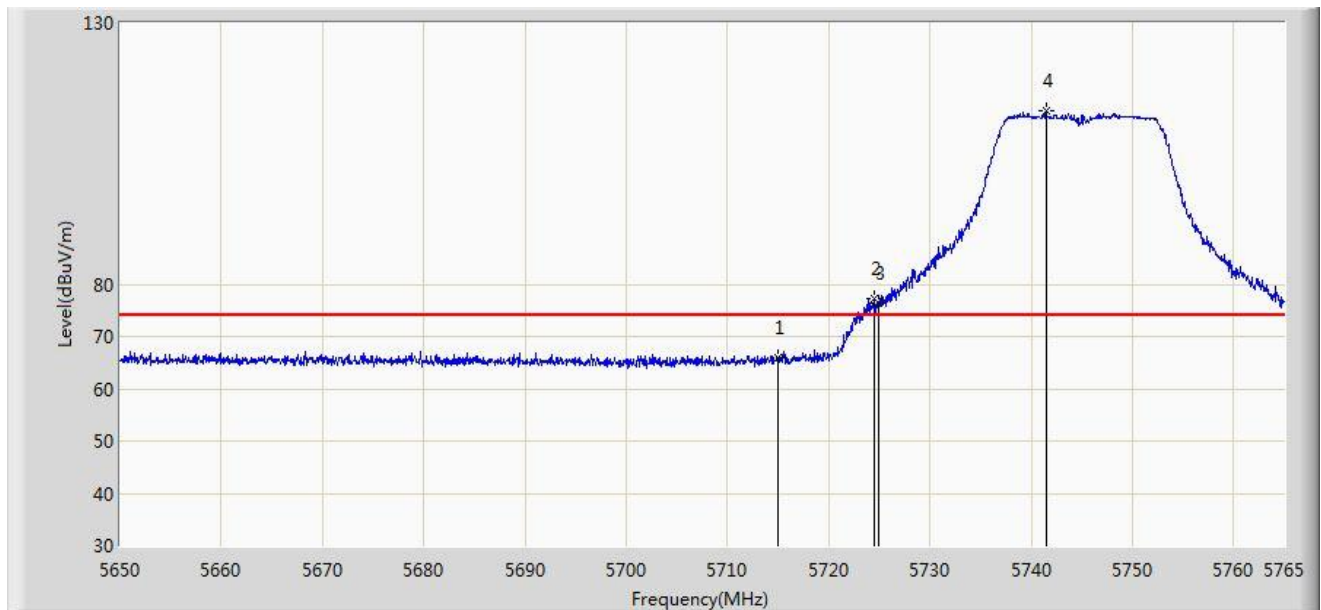


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5715.000        | 65.812                 | 27.863               | -8.188          | 74.000         | 37.949      | PK   |
| 2  |      |      | 5724.520        | 77.196                 | 39.208               | -1.004          | 78.200         | 37.988      | PK   |
| 3  |      |      | 5725.000        | 76.468                 | 38.478               | -1.732          | 78.200         | 37.990      | PK   |
| 4  |      | *    | 5741.482        | 113.079                | 75.022               | N/A             | N/A            | 38.057      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC1                                               | Time: 2015/05/08 - 03:17 |
| Limit: FCC_Part15.209_RE(3m)                            | Engineer: Milo Li        |
| Probe: BBHA9120D_1-18GHz                                | Polarity: Vertical       |
| EUT: 802.11ac Dual Band Module                          | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11a at Channel 5745MHz Ant 0 |                          |

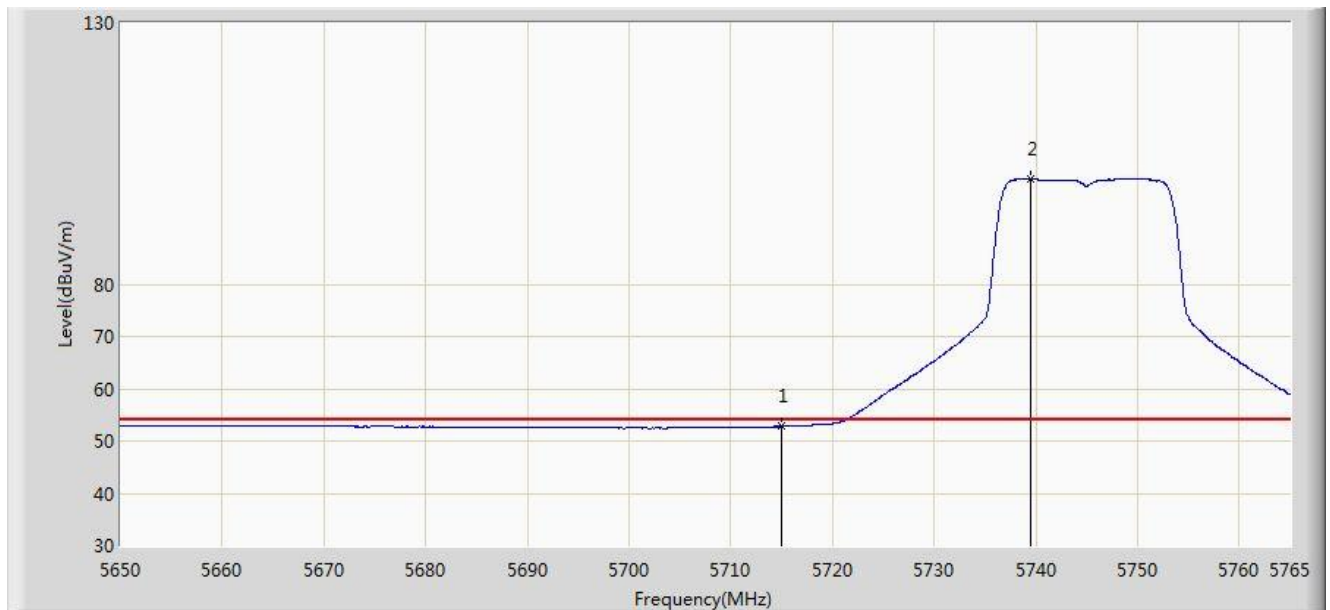


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5715.000        | 52.774                 | 14.825               | -1.226          | 54.000         | 37.949      | AV   |
| 2  |      | *    | 5739.527        | 100.081                | 62.032               | N/A             | N/A            | 38.049      | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC1                                               | Time: 2015/05/08 - 03:32 |
| Limit: FCC_Part15.209_RE(3m)                            | Engineer: Milo Li        |
| Probe: BBHA9120D_1-18GHz                                | Polarity: Horizontal     |
| EUT: 802.11ac Dual Band Module                          | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11a at Channel 5785MHz Ant 0 |                          |

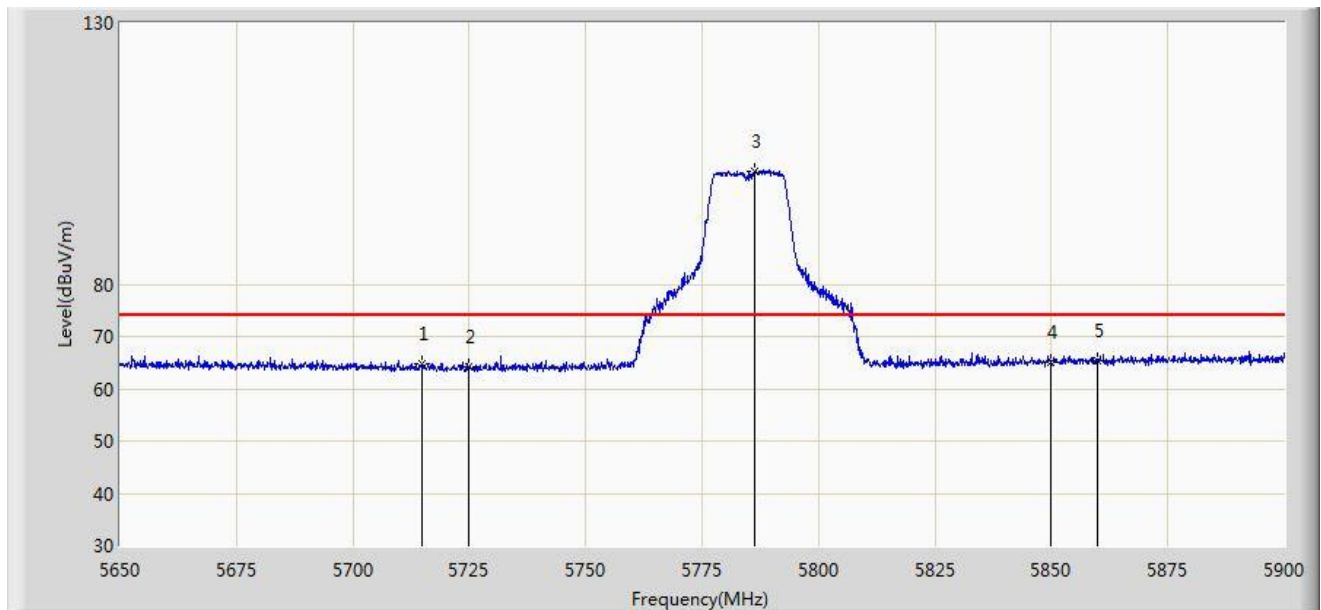


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5715.000        | 64.678                 | 26.729               | -9.322          | 74.000         | 37.949      | PK   |
| 2  |      |      | 5725.000        | 64.117                 | 26.127               | -14.083         | 78.200         | 37.990      | PK   |
| 3  |      | *    | 5786.375        | 101.598                | 63.380               | N/A             | N/A            | 38.218      | PK   |
| 4  |      |      | 5850.000        | 65.022                 | 26.569               | -13.178         | 78.200         | 38.454      | PK   |
| 5  |      |      | 5860.000        | 65.235                 | 26.757               | -8.765          | 74.000         | 38.478      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC1                                               | Time: 2015/05/08 - 03:38 |
| Limit: FCC_Part15.209_RE(3m)                            | Engineer: Milo Li        |
| Probe: BBHA9120D_1-18GHz                                | Polarity: Horizontal     |
| EUT: 802.11ac Dual Band Module                          | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11a at Channel 5785MHz Ant 0 |                          |

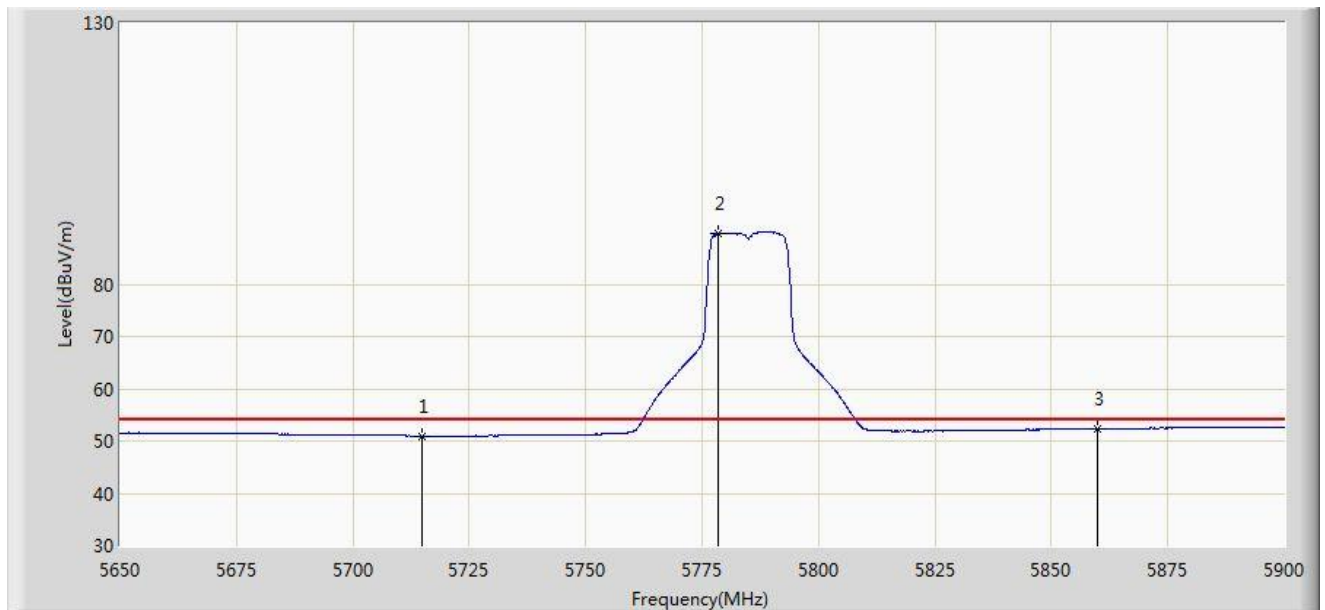


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5715.000        | 51.001                 | 13.052               | -2.999          | 54.000         | 37.949      | AV   |
| 2  |      | *    | 5778.500        | 89.795                 | 51.606               | N/A             | N/A            | 38.189      | AV   |
| 3  |      |      | 5860.000        | 52.327                 | 13.849               | -1.673          | 54.000         | 38.478      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC1                                               | Time: 2015/05/08 - 03:31 |
| Limit: FCC_Part15.209_RE(3m)                            | Engineer: Milo Li        |
| Probe: BBHA9120D_1-18GHz                                | Polarity: Vertical       |
| EUT: 802.11ac Dual Band Module                          | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11a at Channel 5785MHz Ant 0 |                          |

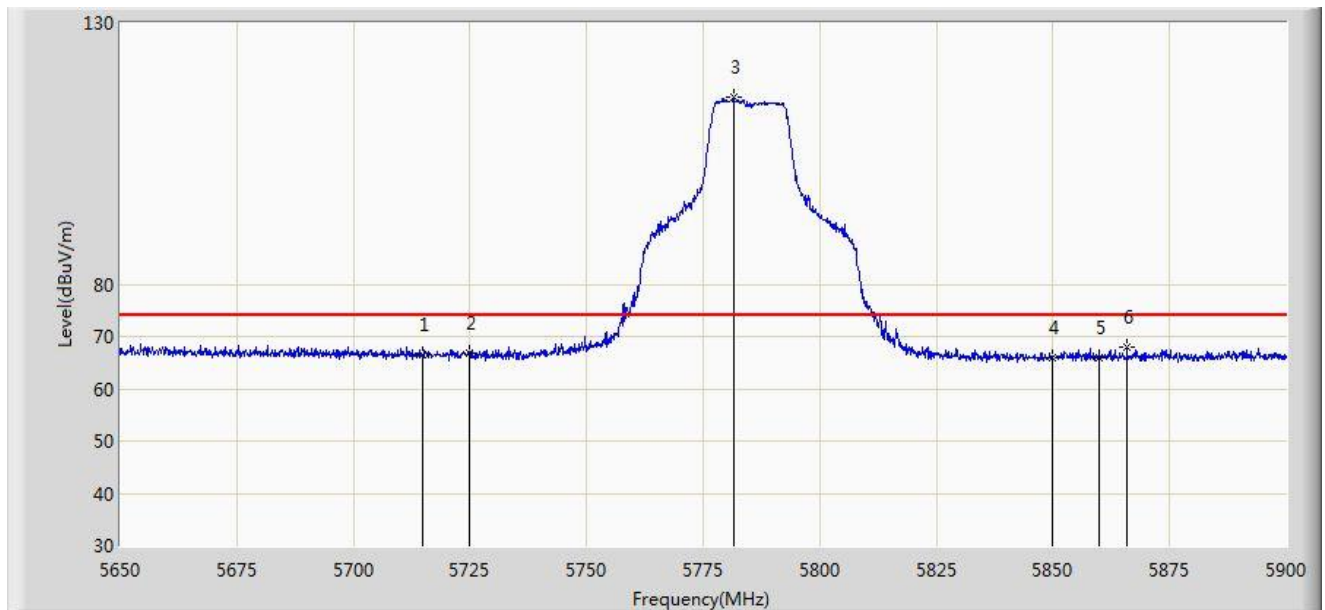


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5715.000        | 66.491                 | 28.542               | -7.509          | 74.000         | 37.949      | PK   |
| 2  |      |      | 5725.000        | 66.759                 | 28.769               | -11.441         | 78.200         | 37.990      | PK   |
| 3  |      | *    | 5781.500        | 115.842                | 77.642               | N/A             | N/A            | 38.200      | PK   |
| 4  |      |      | 5850.000        | 65.954                 | 27.501               | -12.246         | 78.200         | 38.454      | PK   |
| 5  |      |      | 5860.000        | 65.850                 | 27.372               | -8.150          | 74.000         | 38.478      | PK   |
| 6  |      |      | 5865.875        | 68.047                 | 29.560               | -5.953          | 74.000         | 38.487      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC1                                               | Time: 2015/05/08 - 03:29 |
| Limit: FCC_Part15.209_RE(3m)                            | Engineer: Milo Li        |
| Probe: BBHA9120D_1-18GHz                                | Polarity: Vertical       |
| EUT: 802.11ac Dual Band Module                          | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11a at Channel 5785MHz Ant 0 |                          |

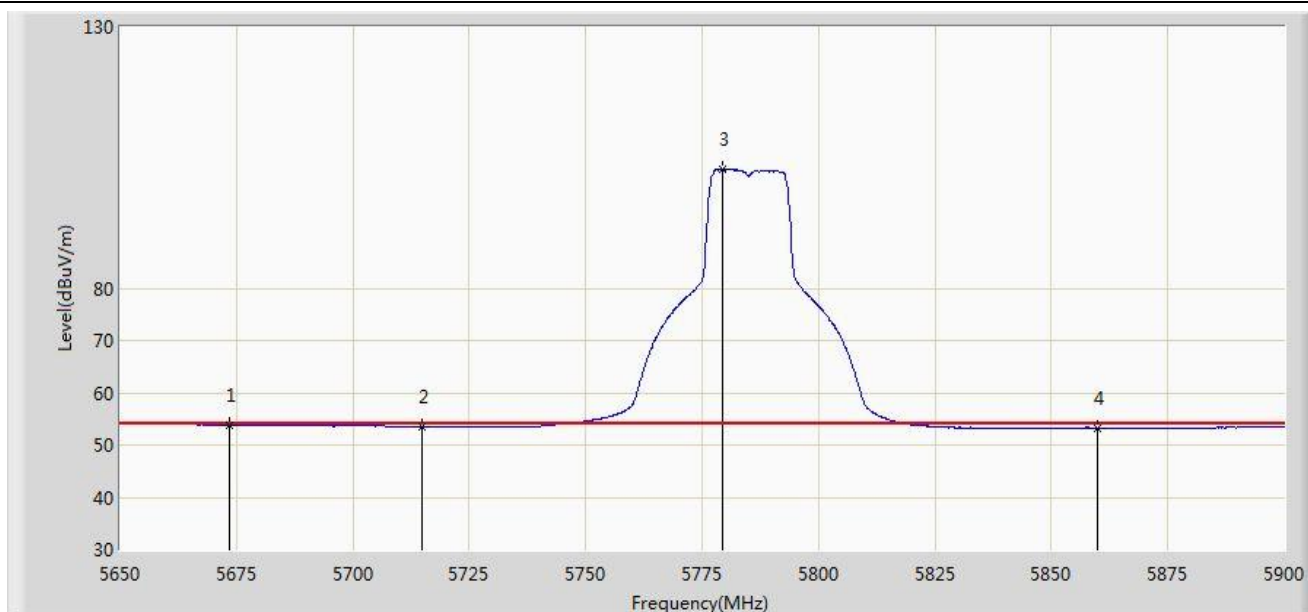


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5673.625        | 53.790                 | 15.976               | -0.210          | 54.000         | 37.814      | AV   |
| 2  |      |      | 5715.000        | 53.539                 | 15.590               | -0.461          | 54.000         | 37.949      | AV   |
| 3  |      | *    | 5779.500        | 102.828                | 64.636               | N/A             | N/A            | 38.192      | AV   |
| 4  |      |      | 5860.000        | 53.260                 | 14.782               | -0.740          | 54.000         | 38.478      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC1                                               | Time: 2015/05/08 - 03:51 |
| Limit: FCC_Part15.209_RE(3m)                            | Engineer: Milo Li        |
| Probe: BBHA9120D_1-18GHz                                | Polarity: Horizontal     |
| EUT: 802.11ac Dual Band Module                          | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11a at Channel 5785MHz Ant 0 |                          |

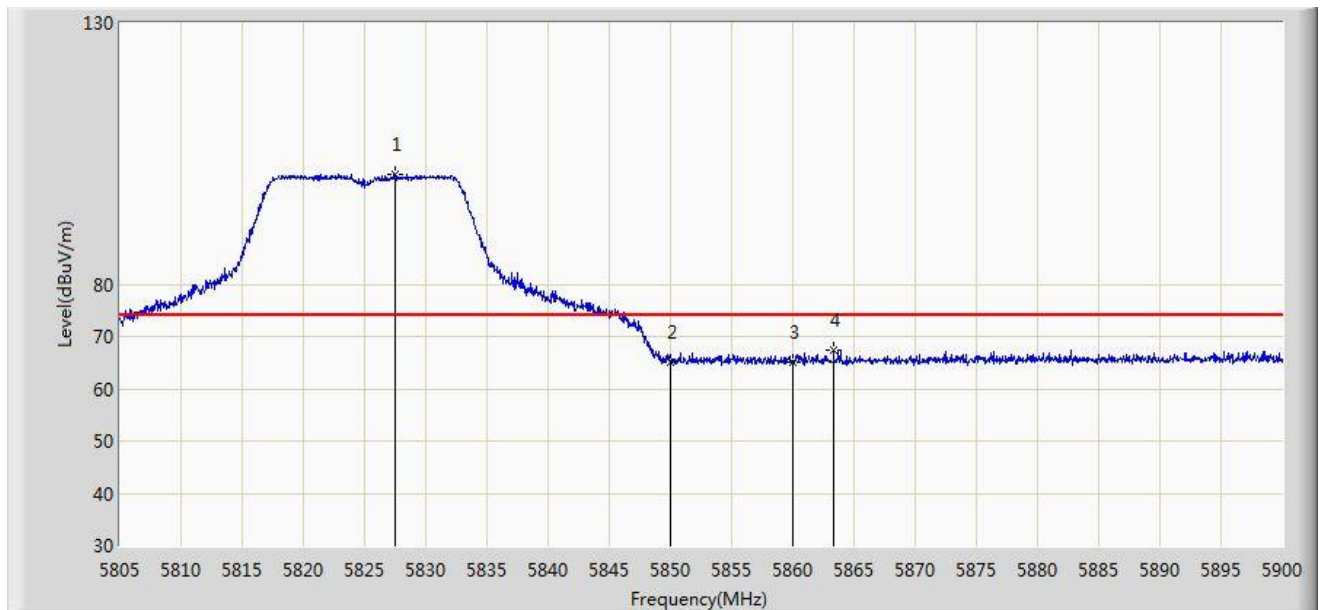


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5827.515        | 100.967                | 62.601               | N/A             | N/A            | 38.366      | PK   |
| 2  |      |      | 5850.000        | 65.210                 | 26.757               | -12.990         | 78.200         | 38.454      | PK   |
| 3  |      |      | 5860.000        | 65.106                 | 26.628               | -8.894          | 74.000         | 38.478      | PK   |
| 4  |      |      | 5863.330        | 67.319                 | 28.835               | -6.681          | 74.000         | 38.484      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC1                                               | Time: 2015/05/08 - 03:53 |
| Limit: FCC_Part15.209_RE(3m)                            | Engineer: Milo Li        |
| Probe: BBHA9120D_1-18GHz                                | Polarity: Horizontal     |
| EUT: 802.11ac Dual Band Module                          | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11a at Channel 5785MHz Ant 0 |                          |

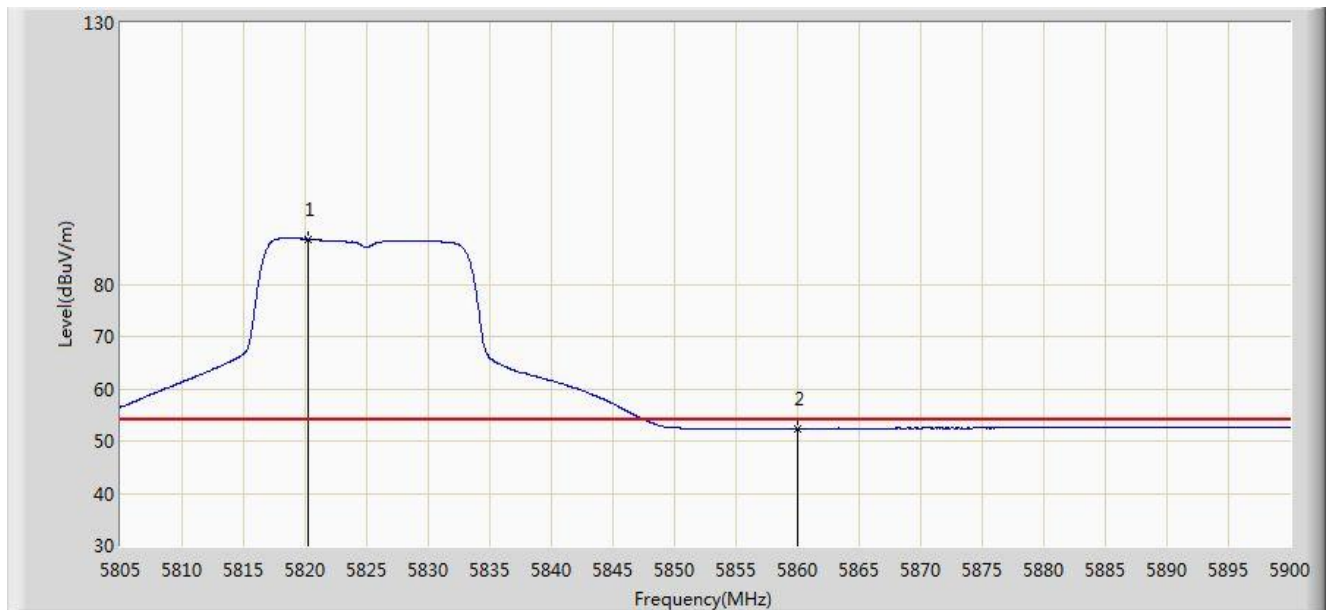


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5820.295        | 88.609                 | 50.273               | N/A             | N/A            | 38.336      | AV   |
| 2  |      |      | 5860.000        | 52.385                 | 13.907               | -1.615          | 54.000         | 38.478      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC1                                               | Time: 2015/05/08 - 03:50 |
| Limit: FCC_Part15.209_RE(3m)                            | Engineer: Milo Li        |
| Probe: BBHA9120D_1-18GHz                                | Polarity: Vertical       |
| EUT: 802.11ac Dual Band Module                          | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11a at Channel 5785MHz Ant 0 |                          |

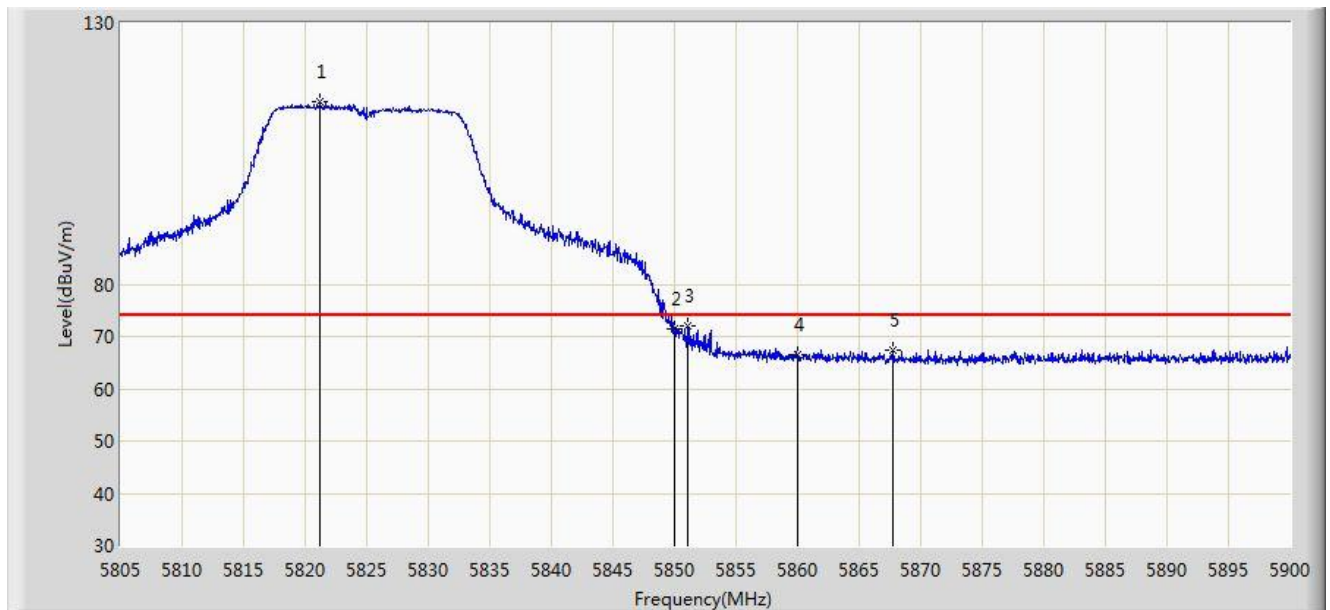


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5821.197        | 114.787                | 76.447               | N/A             | N/A            | 38.340      | PK   |
| 2  |      |      | 5850.000        | 71.397                 | 32.944               | -6.803          | 78.200         | 38.454      | PK   |
| 3  |      |      | 5851.027        | 71.975                 | 33.519               | -6.225          | 78.200         | 38.455      | PK   |
| 4  |      |      | 5860.000        | 66.445                 | 27.967               | -7.555          | 74.000         | 38.478      | PK   |
| 5  |      |      | 5867.700        | 67.462                 | 28.973               | -6.538          | 74.000         | 38.489      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC1                                               | Time: 2015/05/08 - 03:49 |
| Limit: FCC_Part15.209_RE(3m)                            | Engineer: Milo Li        |
| Probe: BBHA9120D_1-18GHz                                | Polarity: Vertical       |
| EUT: 802.11ac Dual Band Module                          | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11a at Channel 5785MHz Ant 0 |                          |

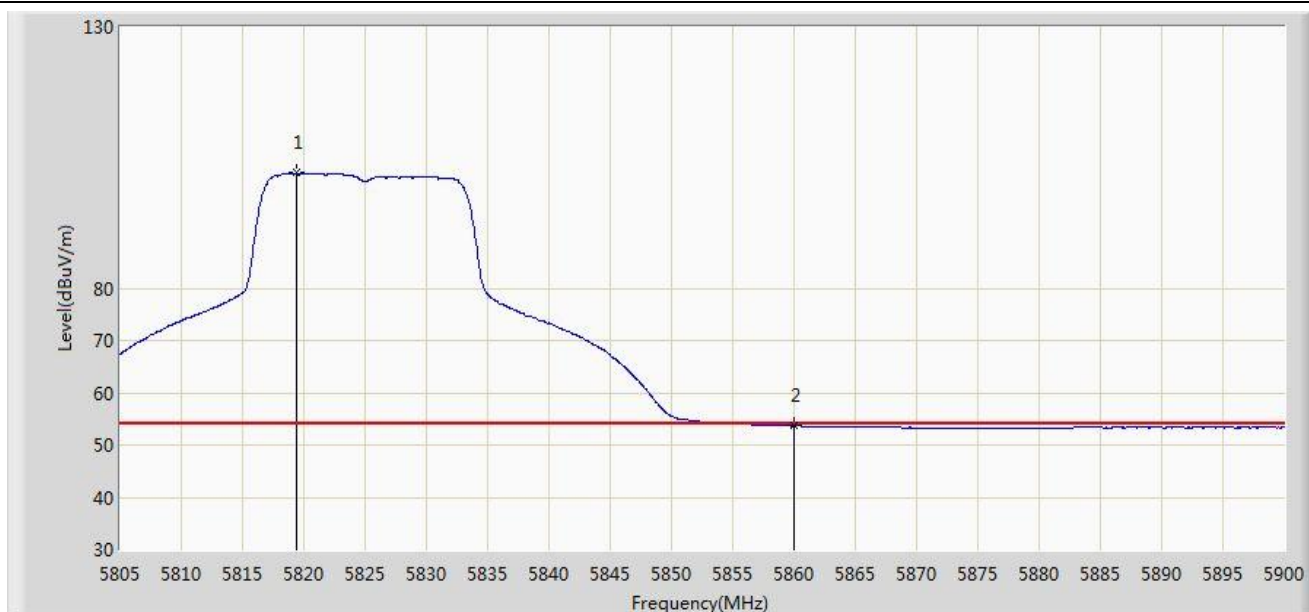


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5819.440        | 102.031                | 63.698               | N/A             | N/A            | 38.332      | AV   |
| 2  |      |      | 5860.000        | 53.649                 | 15.171               | -0.351          | 54.000         | 38.478      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                              |                          |
|--------------------------------------------------------------|--------------------------|
| Site: AC1                                                    | Time: 2015/05/09 - 00:28 |
| Limit: FCC_Part15.209_RE(3m)                                 | Engineer: Milo Li        |
| Probe: BBHA9120D_1-18GHz                                     | Polarity: Horizontal     |
| EUT: 802.11ac Dual Band Module                               | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT20 at Channel 5180MHz Ant 0 |                          |

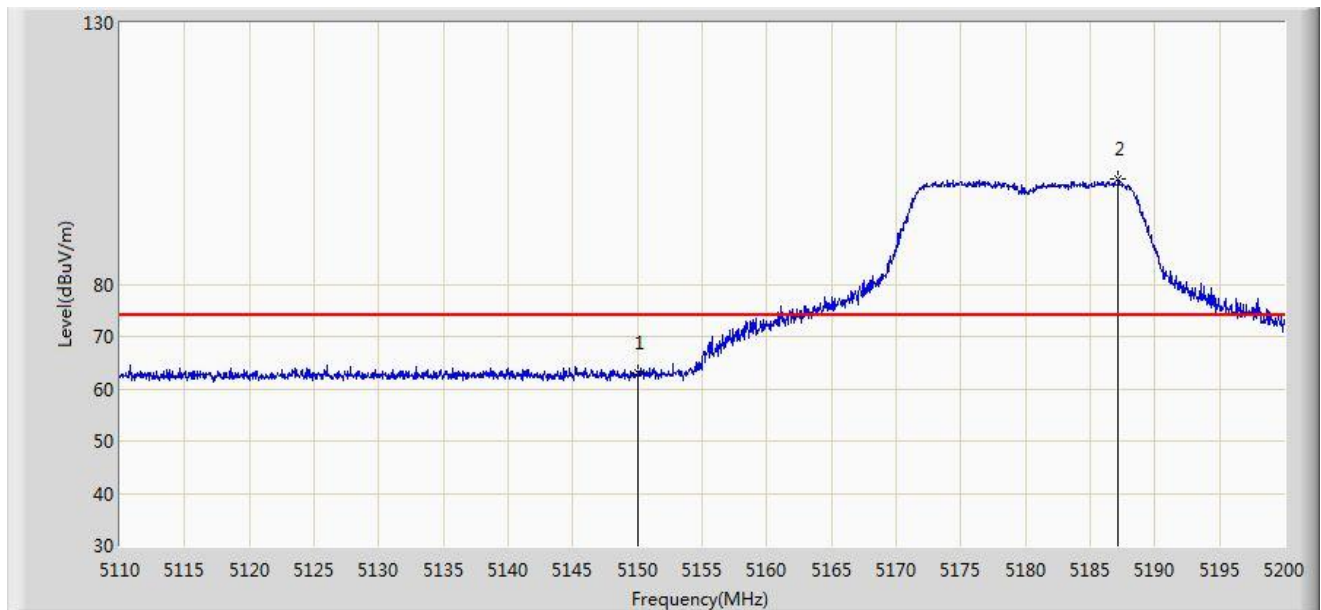


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5150.000        | 63.172                 | 25.720               | -10.828         | 74.000         | 37.452      | PK   |
| 2  |      | *    | 5187.175        | 100.147                | 62.791               | N/A             | N/A            | 37.356      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                              |                          |
|--------------------------------------------------------------|--------------------------|
| Site: AC1                                                    | Time: 2015/05/09 - 00:28 |
| Limit: FCC_Part15.209_RE(3m)                                 | Engineer: Milo Li        |
| Probe: BBHA9120D_1-18GHz                                     | Polarity: Horizontal     |
| EUT: 802.11ac Dual Band Module                               | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT20 at Channel 5180MHz Ant 0 |                          |

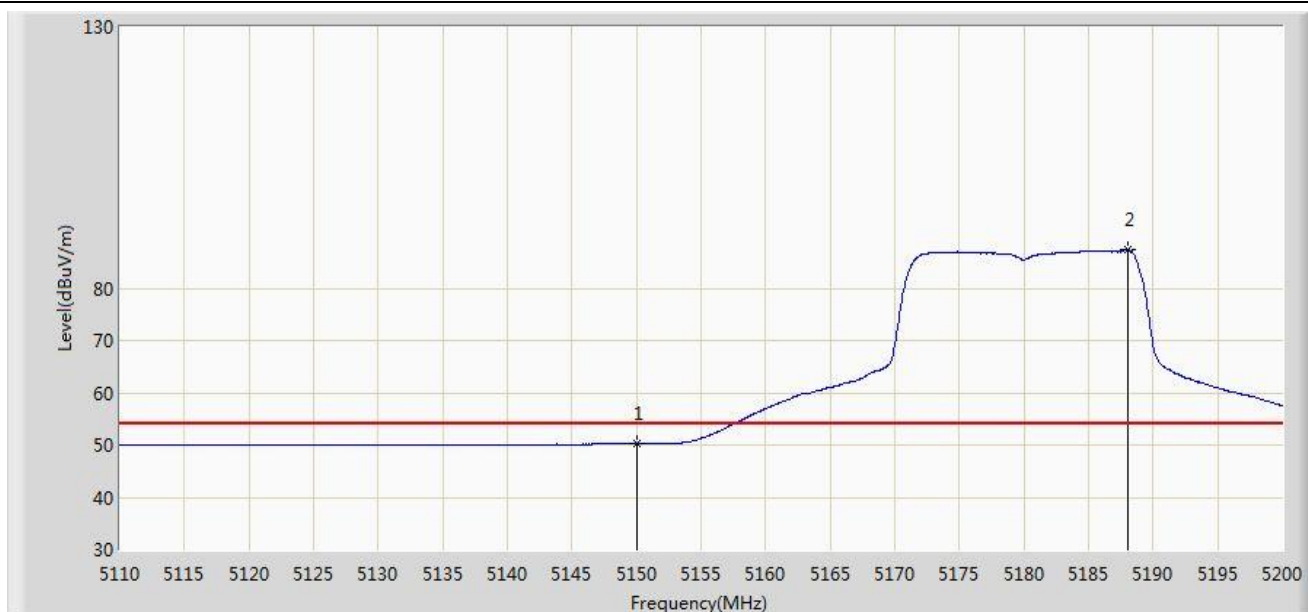


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5150.000        | 50.241                 | 12.789               | -3.759          | 54.000         | 37.452      | AV   |
| 2  |      | *    | 5188.075        | 87.369                 | 50.015               | N/A             | N/A            | 37.353      | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                              |                          |
|--------------------------------------------------------------|--------------------------|
| Site: AC1                                                    | Time: 2015/05/09 - 00:27 |
| Limit: FCC_Part15.209_RE(3m)                                 | Engineer: Milo Li        |
| Probe: BBHA9120D_1-18GHz                                     | Polarity: Vertical       |
| EUT: 802.11ac Dual Band Module                               | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT20 at Channel 5180MHz Ant 0 |                          |

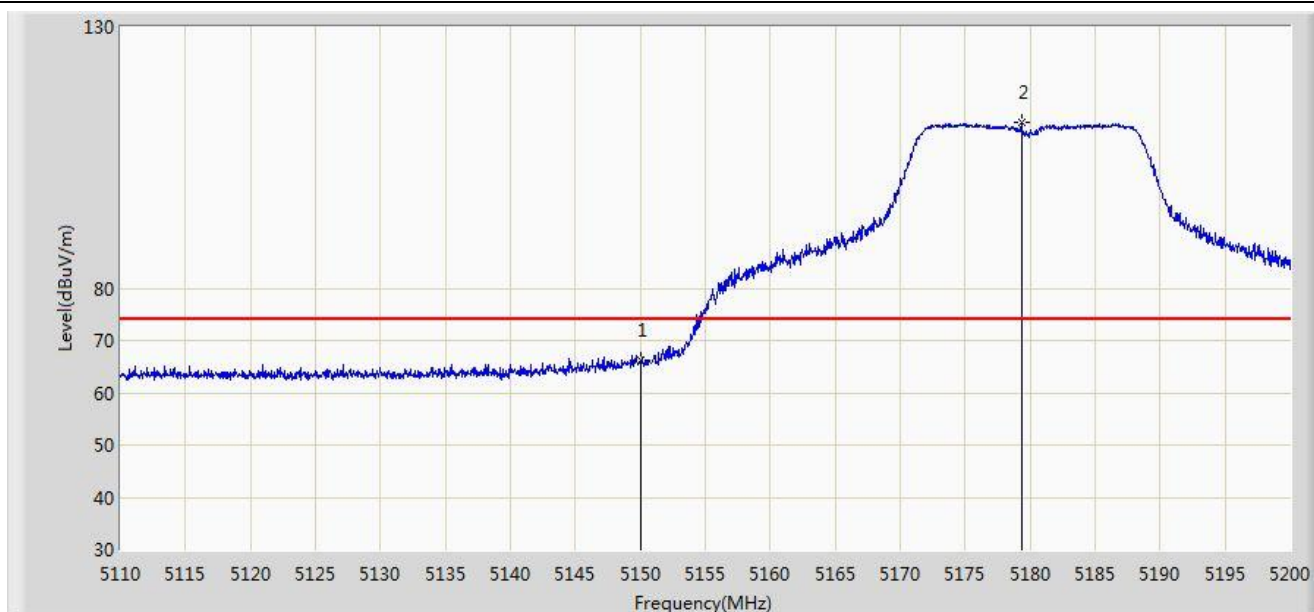


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5150.000        | 66.209                 | 28.757               | -7.791          | 74.000         | 37.452      | PK   |
| 2  |      | *    | 5179.345        | 111.720                | 74.345               | N/A             | N/A            | 37.375      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                              |                          |
|--------------------------------------------------------------|--------------------------|
| Site: AC1                                                    | Time: 2015/05/09 - 00:26 |
| Limit: FCC_Part15.209_RE(3m)                                 | Engineer: Milo Li        |
| Probe: BBHA9120D_1-18GHz                                     | Polarity: Vertical       |
| EUT: 802.11ac Dual Band Module                               | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT20 at Channel 5180MHz Ant 0 |                          |

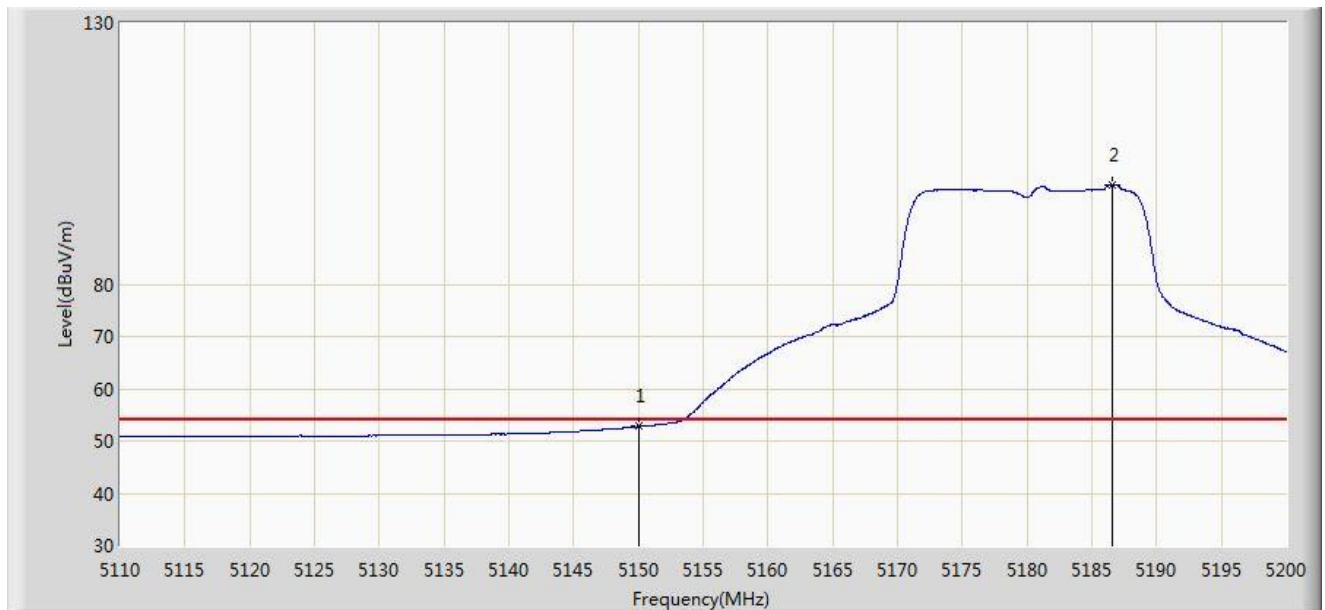


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5150.000        | 52.755                 | 15.303               | -1.245          | 54.000         | 37.452      | AV   |
| 2  |      | *    | 5186.635        | 99.102                 | 61.745               | N/A             | N/A            | 37.357      | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                              |                          |
|--------------------------------------------------------------|--------------------------|
| Site: AC1                                                    | Time: 2015/05/09 - 00:35 |
| Limit: FCC_Part15.209_RE(3m)                                 | Engineer: Milo Li        |
| Probe: BBHA9120D_1-18GHz                                     | Polarity: Horizontal     |
| EUT: 802.11ac Dual Band Module                               | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT20 at Channel 5320MHz Ant 0 |                          |

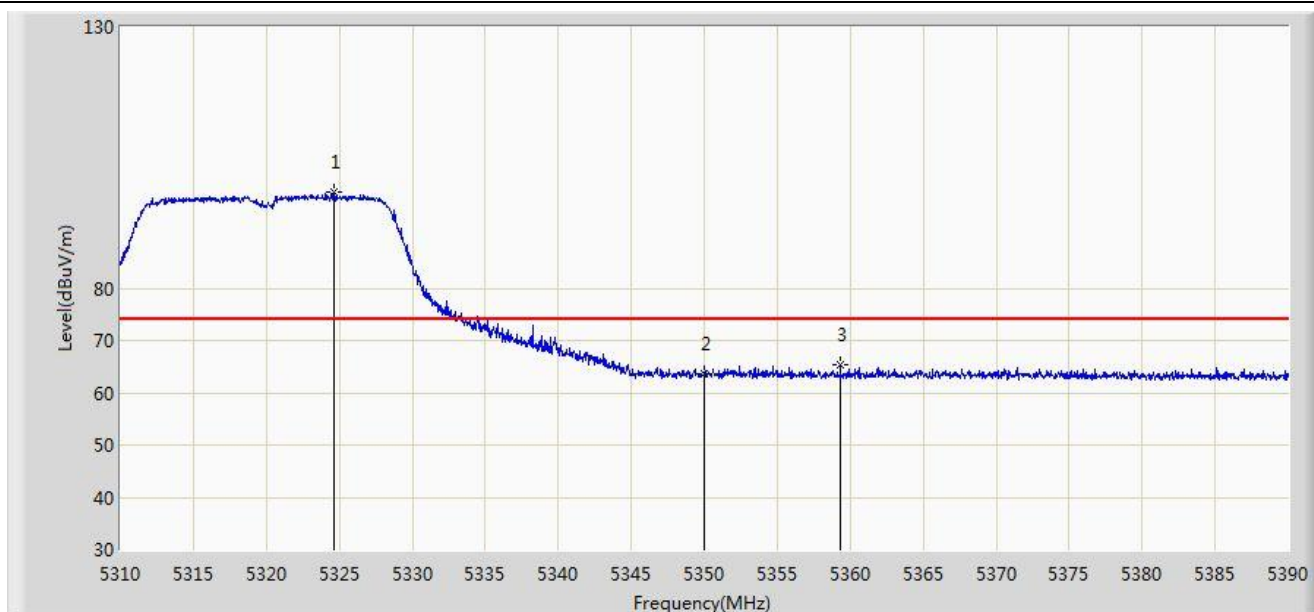


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5324.680        | 98.355                 | 61.133               | N/A             | N/A            | 37.222      | PK   |
| 2  |      |      | 5350.000        | 63.620                 | 26.334               | -10.380         | 74.000         | 37.286      | PK   |
| 3  |      |      | 5359.320        | 65.477                 | 28.165               | -8.523          | 74.000         | 37.312      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                              |                          |
|--------------------------------------------------------------|--------------------------|
| Site: AC1                                                    | Time: 2015/05/09 - 00:37 |
| Limit: FCC_Part15.209_RE(3m)                                 | Engineer: Milo Li        |
| Probe: BBHA9120D_1-18GHz                                     | Polarity: Horizontal     |
| EUT: 802.11ac Dual Band Module                               | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT20 at Channel 5320MHz Ant 0 |                          |

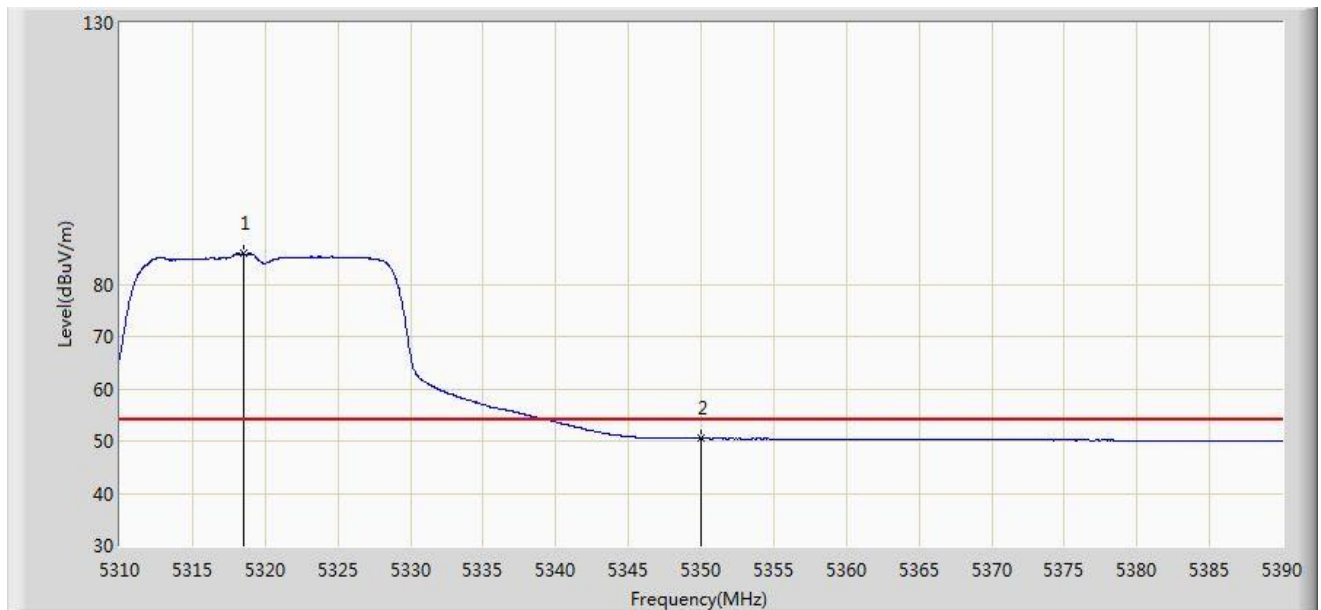


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5318.560        | 85.803                 | 48.592               | N/A             | N/A            | 37.211      | AV   |
| 2  |      |      | 5350.000        | 50.466                 | 13.180               | -3.534          | 54.000         | 37.286      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                              |                          |
|--------------------------------------------------------------|--------------------------|
| Site: AC1                                                    | Time: 2015/05/09 - 00:34 |
| Limit: FCC_Part15.209_RE(3m)                                 | Engineer: Milo Li        |
| Probe: BBHA9120D_1-18GHz                                     | Polarity: Vertical       |
| EUT: 802.11ac Dual Band Module                               | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT20 at Channel 5320MHz Ant 0 |                          |

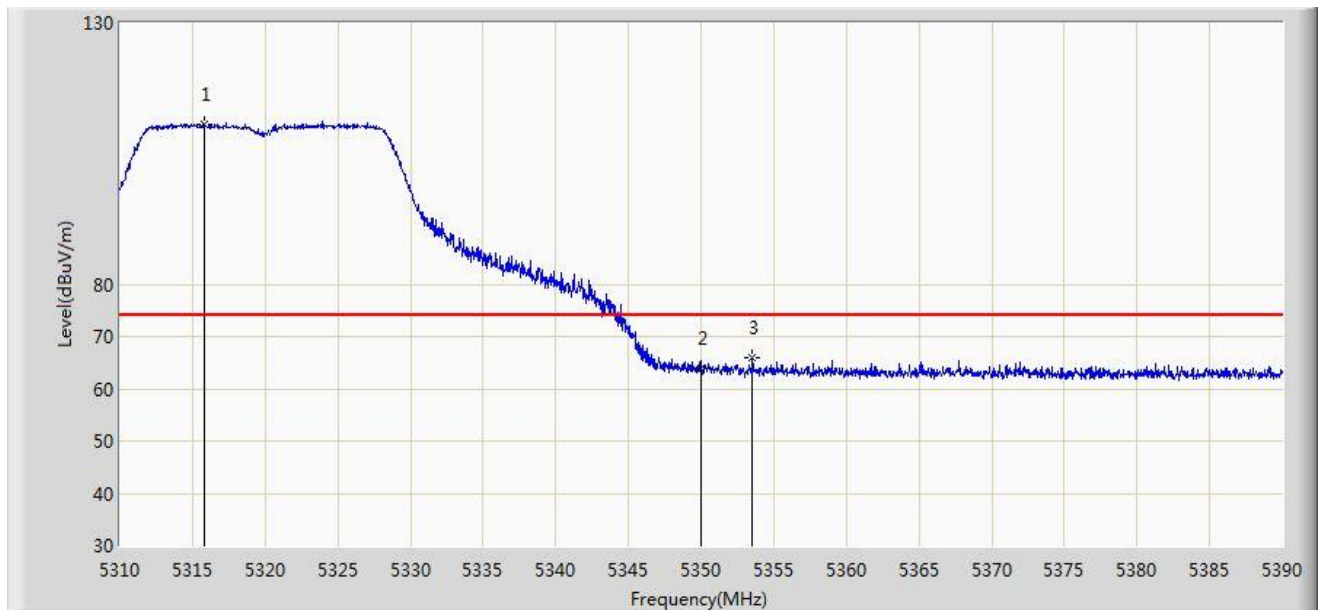


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5315.840        | 110.667                | 73.461               | N/A             | N/A            | 37.206      | PK   |
| 2  |      |      | 5350.000        | 63.894                 | 26.608               | -10.106         | 74.000         | 37.286      | PK   |
| 3  |      |      | 5353.520        | 65.903                 | 28.606               | -8.097          | 74.000         | 37.296      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                              |                          |
|--------------------------------------------------------------|--------------------------|
| Site: AC1                                                    | Time: 2015/05/09 - 00:34 |
| Limit: FCC_Part15.209_RE(3m)                                 | Engineer: Milo Li        |
| Probe: BBHA9120D_1-18GHz                                     | Polarity: Vertical       |
| EUT: 802.11ac Dual Band Module                               | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT20 at Channel 5320MHz Ant 0 |                          |

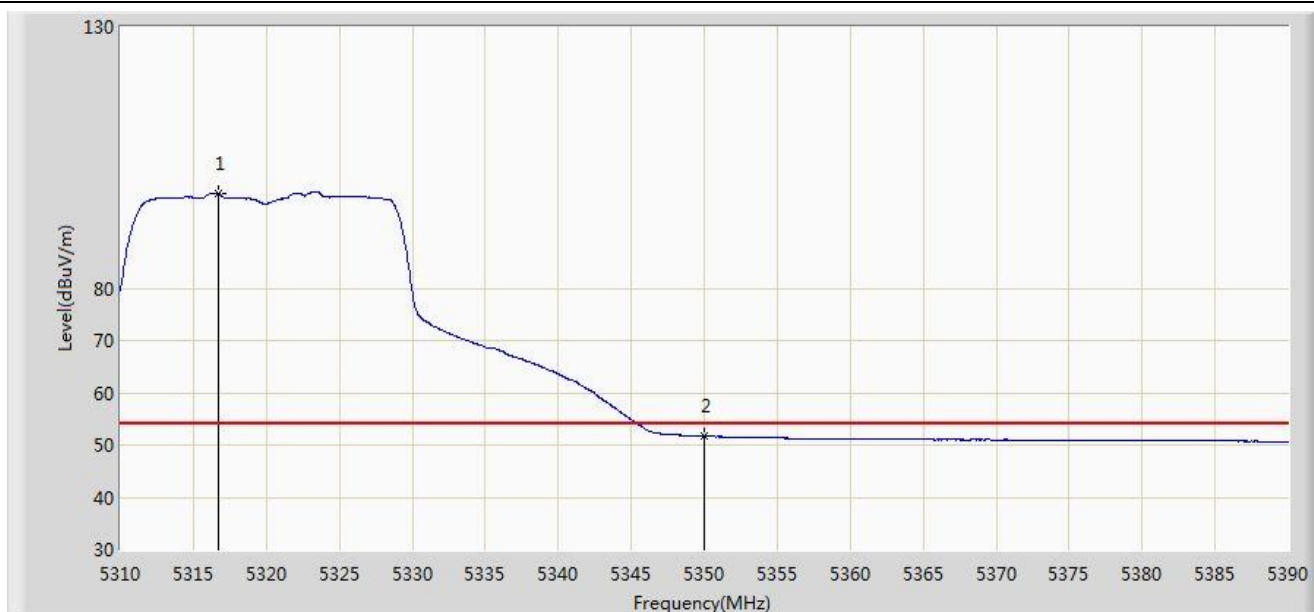


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5316.680        | 98.185                 | 60.977               | N/A             | N/A            | 37.208      | AV   |
| 2  |      |      | 5350.000        | 51.665                 | 14.379               | -2.335          | 54.000         | 37.286      | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                              |                          |
|--------------------------------------------------------------|--------------------------|
| Site: AC1                                                    | Time: 2015/05/09 - 00:50 |
| Limit: FCC_Part15.209_RE(3m)                                 | Engineer: Milo Li        |
| Probe: BBHA9120D_1-18GHz                                     | Polarity: Horizontal     |
| EUT: 802.11ac Dual Band Module                               | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT20 at Channel 5500MHz Ant 0 |                          |

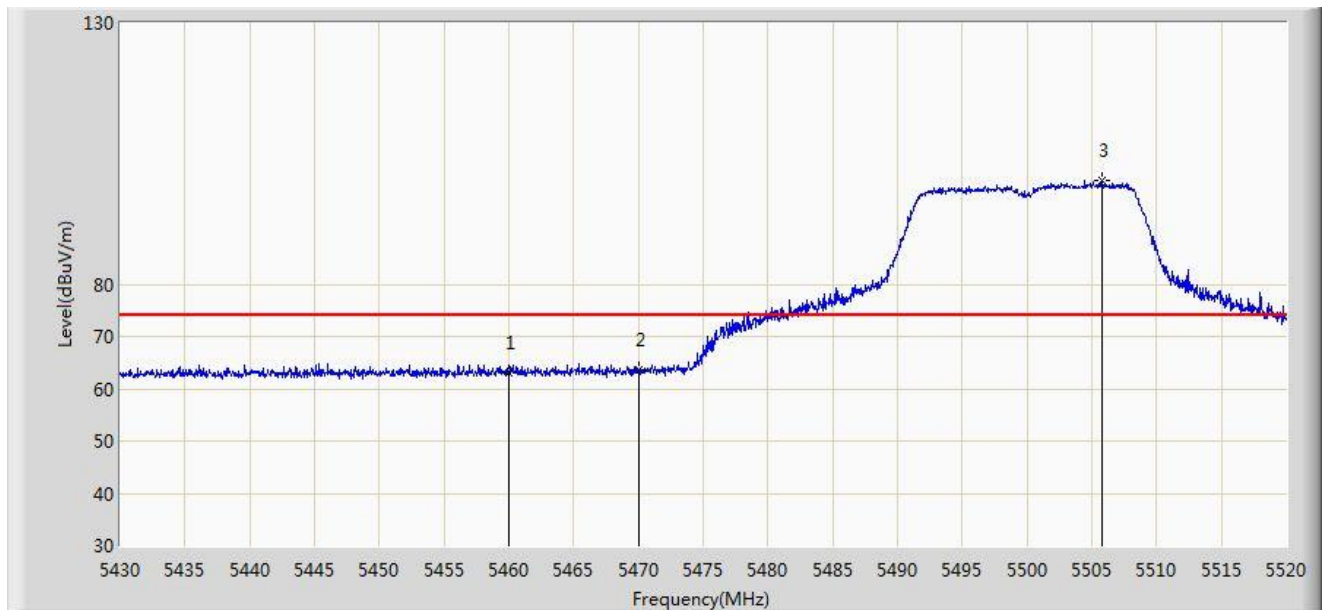


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5460.000        | 62.972                 | 25.409               | -11.028         | 74.000         | 37.563      | PK   |
| 2  |      |      | 5470.000        | 63.534                 | 25.945               | -10.466         | 74.000         | 37.588      | PK   |
| 3  |      | *    | 5505.735        | 99.827                 | 62.196               | N/A             | N/A            | 37.630      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                              |                          |
|--------------------------------------------------------------|--------------------------|
| Site: AC1                                                    | Time: 2015/05/09 - 00:51 |
| Limit: FCC_Part15.209_RE(3m)                                 | Engineer: Milo Li        |
| Probe: BBHA9120D_1-18GHz                                     | Polarity: Horizontal     |
| EUT: 802.11ac Dual Band Module                               | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT20 at Channel 5500MHz Ant 0 |                          |

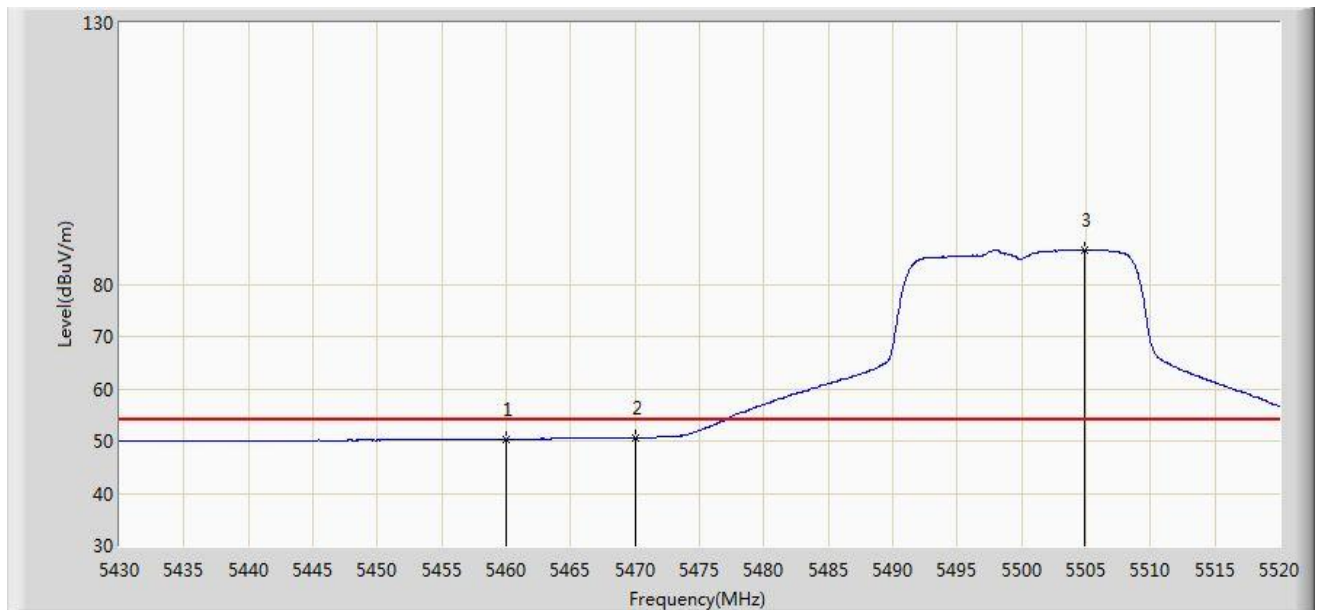


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5460.000        | 50.303                 | 12.740               | -3.697          | 54.000         | 37.563      | AV   |
| 2  |      |      | 5470.000        | 50.611                 | 13.022               | -3.389          | 54.000         | 37.588      | AV   |
| 3  |      | *    | 5504.835        | 86.543                 | 48.913               | N/A             | N/A            | 37.630      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                              |                          |
|--------------------------------------------------------------|--------------------------|
| Site: AC1                                                    | Time: 2015/05/09 - 00:49 |
| Limit: FCC_Part15.209_RE(3m)                                 | Engineer: Milo Li        |
| Probe: BBHA9120D_1-18GHz                                     | Polarity: Vertical       |
| EUT: 802.11ac Dual Band Module                               | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT20 at Channel 5500MHz Ant 0 |                          |

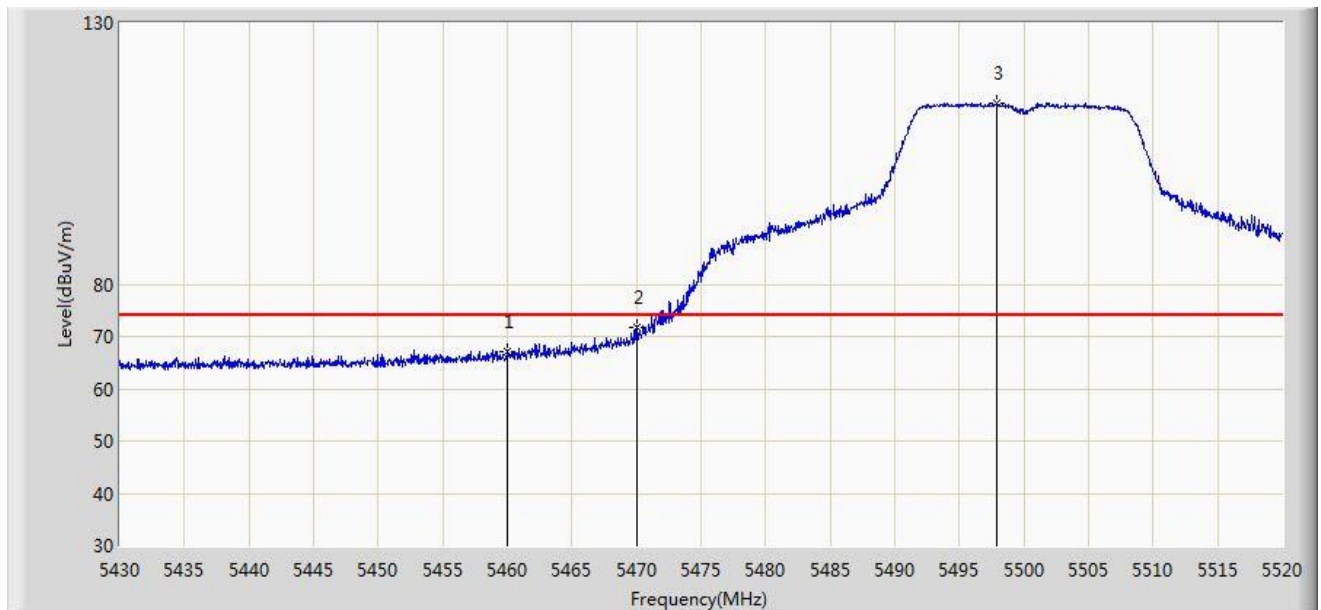


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5460.000        | 67.024                 | 29.461               | -6.976          | 74.000         | 37.563      | PK   |
| 2  |      |      | 5470.000        | 71.800                 | 34.211               | -2.200          | 74.000         | 37.588      | PK   |
| 3  |      | *    | 5497.860        | 114.726                | 77.104               | N/A             | N/A            | 37.622      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                              |                          |
|--------------------------------------------------------------|--------------------------|
| Site: AC1                                                    | Time: 2015/05/17 - 00:01 |
| Limit: FCC_Part15.209_RE(3m)                                 | Engineer: Milo Li        |
| Probe: BBHA9120D_1-18GHz                                     | Polarity: Vertical       |
| EUT: 802.11ac Dual Band Module                               | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT20 at Channel 5500MHz Ant 0 |                          |

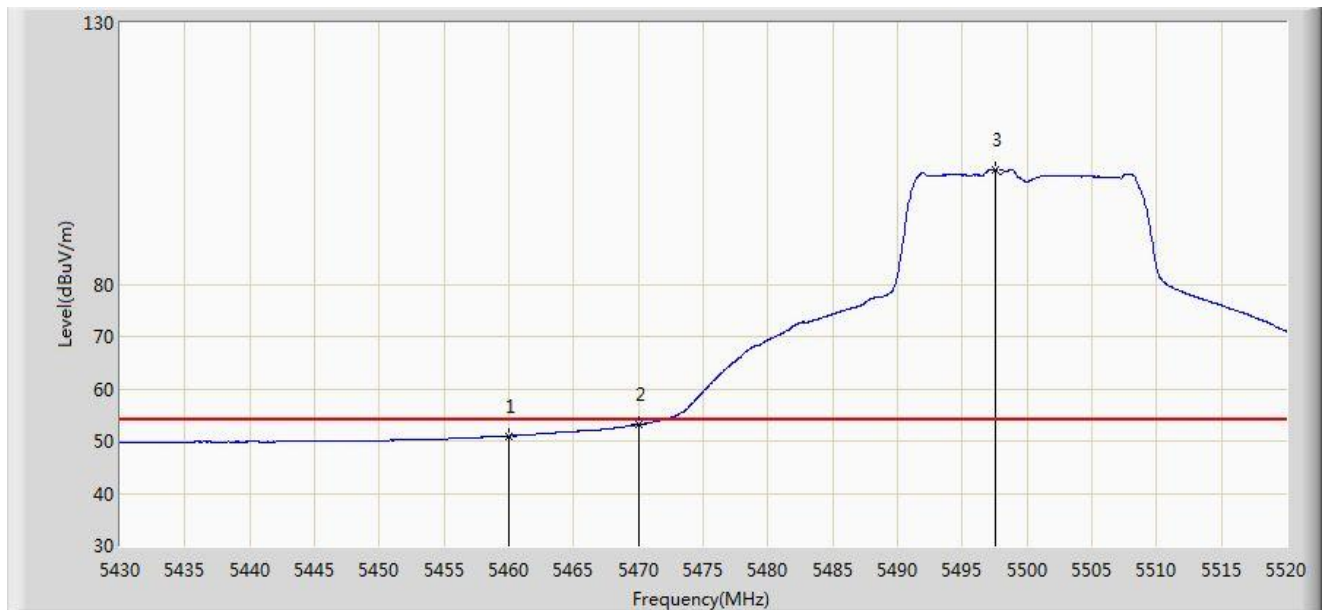


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5460.000        | 50.984                 | 13.421               | -3.016          | 54.000         | 37.563      | AV   |
| 2  |      |      | 5470.000        | 53.112                 | 15.524               | -0.888          | 54.000         | 37.588      | AV   |
| 3  |      | *    | 5497.545        | 101.902                | 64.280               | N/A             | N/A            | 37.622      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                              |                          |
|--------------------------------------------------------------|--------------------------|
| Site: AC1                                                    | Time: 2015/05/09 - 00:57 |
| Limit: FCC_Part15.209_RE(3m)                                 | Engineer: Milo Li        |
| Probe: BBHA9120D_1-18GHz                                     | Polarity: Horizontal     |
| EUT: 802.11ac Dual Band Module                               | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT20 at Channel 5700MHz Ant 0 |                          |

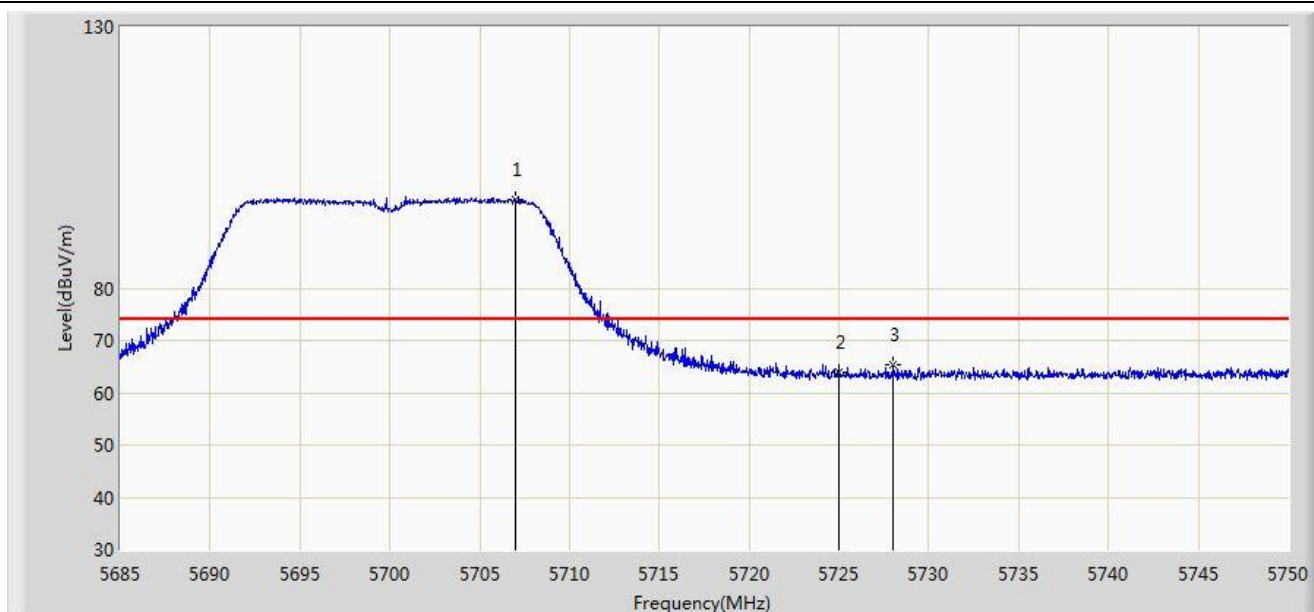


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5707.002        | 96.952                 | 59.035               | N/A             | N/A            | 37.917      | PK   |
| 2  |      |      | 5725.000        | 63.914                 | 25.924               | -10.086         | 74.000         | 37.990      | PK   |
| 3  |      |      | 5728.030        | 65.471                 | 27.469               | -8.529          | 74.000         | 38.003      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                              |                          |
|--------------------------------------------------------------|--------------------------|
| Site: AC1                                                    | Time: 2015/05/09 - 00:58 |
| Limit: FCC_Part15.209_RE(3m)                                 | Engineer: Milo Li        |
| Probe: BBHA9120D_1-18GHz                                     | Polarity: Horizontal     |
| EUT: 802.11ac Dual Band Module                               | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT20 at Channel 5700MHz Ant 0 |                          |

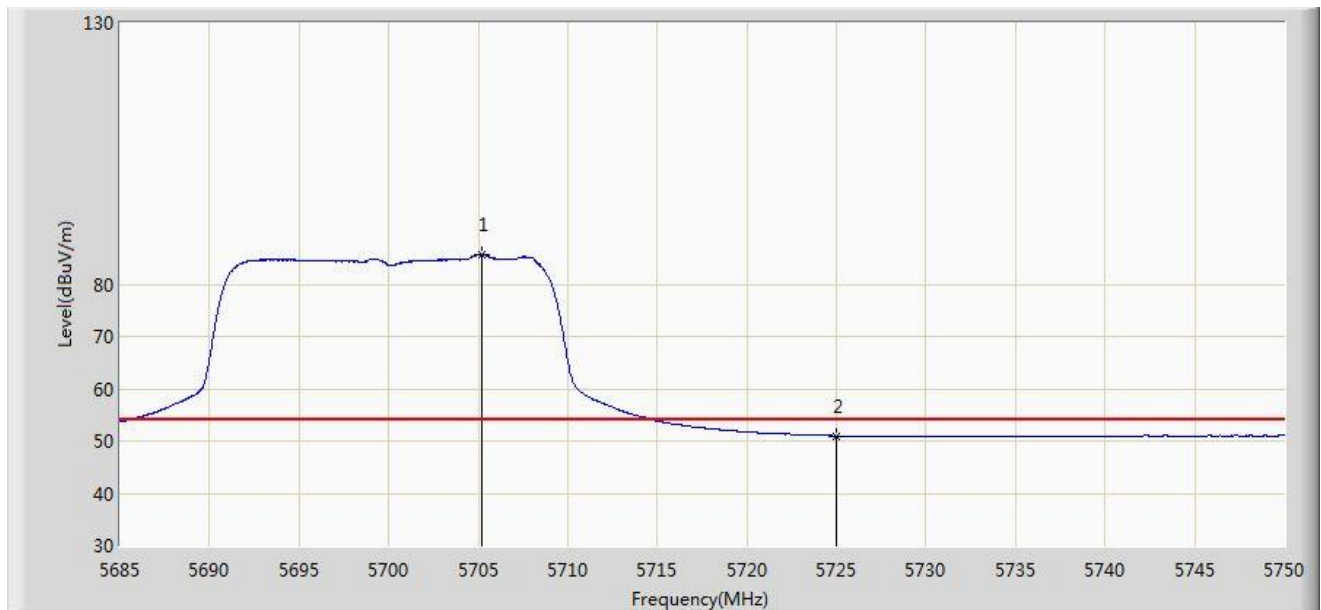


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5705.183        | 85.568                 | 47.659               | N/A             | N/A            | 37.909      | AV   |
| 2  |      |      | 5725.000        | 50.999                 | 13.009               | -3.001          | 54.000         | 37.990      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                              |                          |
|--------------------------------------------------------------|--------------------------|
| Site: AC1                                                    | Time: 2015/05/16 - 18:14 |
| Limit: FCC_Part15.209_RE(3m)                                 | Engineer: Milo Li        |
| Probe: BBHA9120D_1-18GHz                                     | Polarity: Vertical       |
| EUT: 802.11ac Dual Band Module                               | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT20 at Channel 5700MHz Ant 0 |                          |

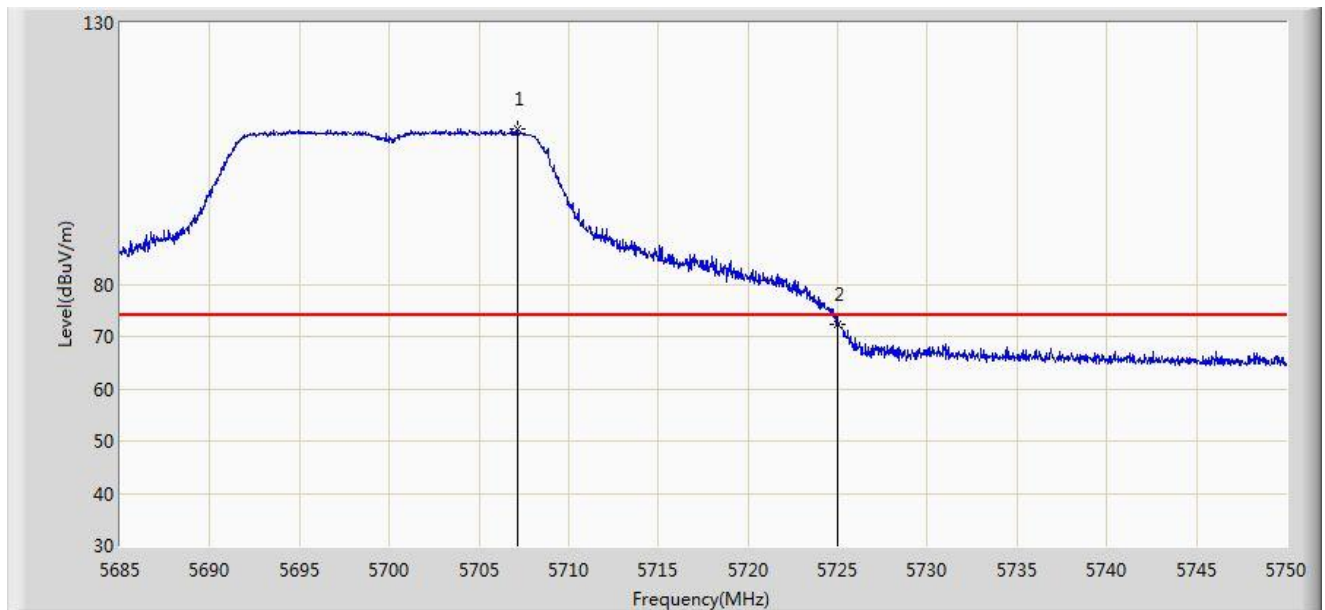


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5707.165        | 109.697                | 71.780               | N/A             | N/A            | 37.917      | PK   |
| 2  |      |      | 5725.000        | 72.453                 | 34.463               | -1.547          | 74.000         | 37.990      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                              |                          |
|--------------------------------------------------------------|--------------------------|
| Site: AC1                                                    | Time: 2015/05/09 - 00:56 |
| Limit: FCC_Part15.209_RE(3m)                                 | Engineer: Milo Li        |
| Probe: BBHA9120D_1-18GHz                                     | Polarity: Vertical       |
| EUT: 802.11ac Dual Band Module                               | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT20 at Channel 5700MHz Ant 0 |                          |

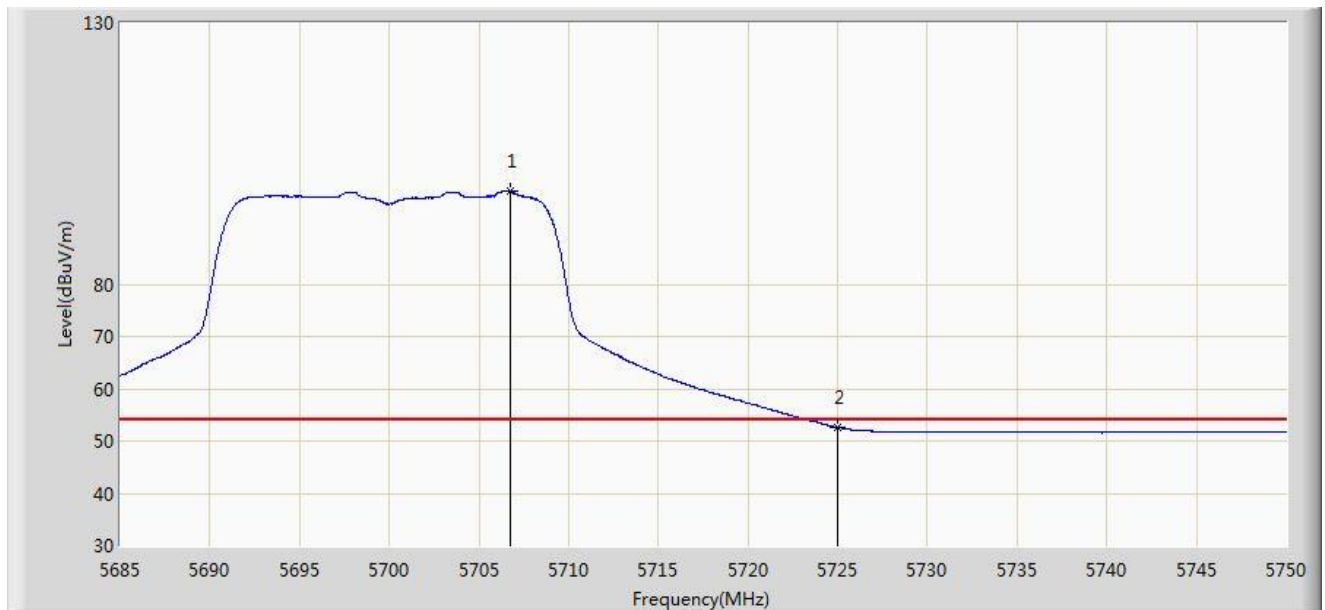


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5706.710        | 97.798                 | 59.883               | N/A             | N/A            | 37.915      | AV   |
| 2  |      |      | 5725.000        | 52.614                 | 14.624               | -1.386          | 54.000         | 37.990      | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                              |                          |
|--------------------------------------------------------------|--------------------------|
| Site: AC1                                                    | Time: 2015/05/09 - 01:09 |
| Limit: FCC_Part15.209_RE(3m)                                 | Engineer: Milo Li        |
| Probe: BBHA9120D_1-18GHz                                     | Polarity: Horizontal     |
| EUT: 802.11ac Dual Band Module                               | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT20 at Channel 5745MHz Ant 0 |                          |

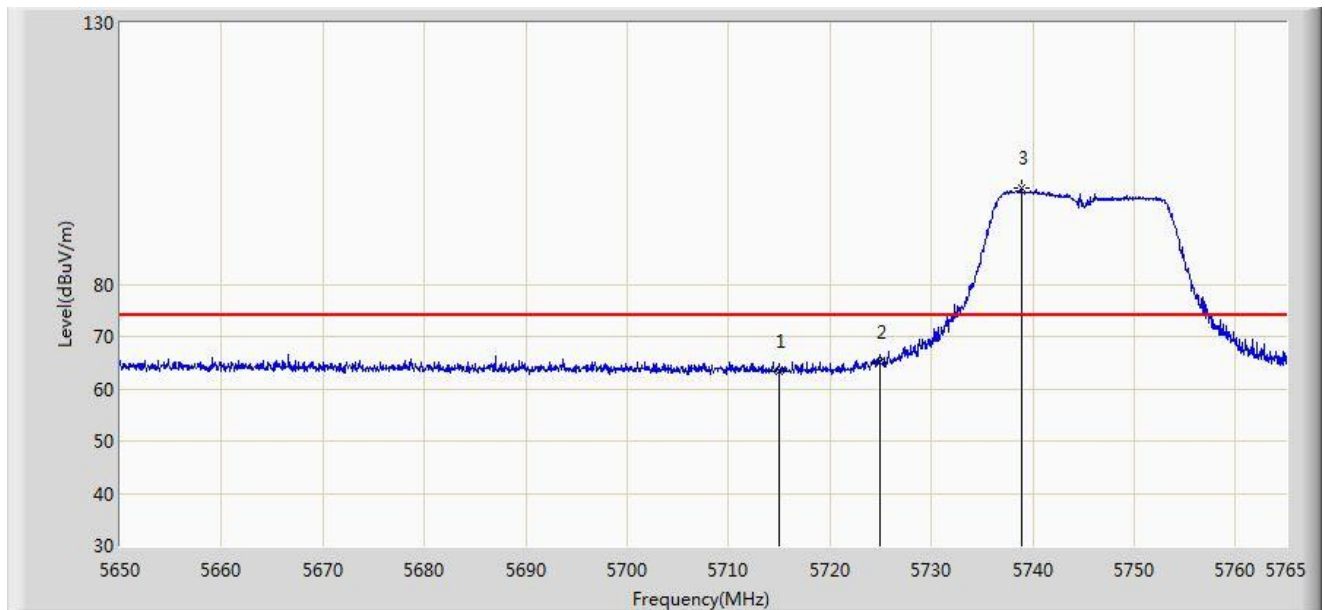


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5715.000        | 63.395                 | 25.446               | -10.605         | 74.000         | 37.949      | PK   |
| 2  |      |      | 5725.000        | 65.217                 | 27.227               | -12.983         | 78.200         | 37.990      | PK   |
| 3  |      | *    | 5738.895        | 98.311                 | 60.264               | N/A             | N/A            | 38.047      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                              |                          |
|--------------------------------------------------------------|--------------------------|
| Site: AC1                                                    | Time: 2015/05/09 - 01:10 |
| Limit: FCC_Part15.209_RE(3m)                                 | Engineer: Milo Li        |
| Probe: BBHA9120D_1-18GHz                                     | Polarity: Horizontal     |
| EUT: 802.11ac Dual Band Module                               | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT20 at Channel 5745MHz Ant 0 |                          |

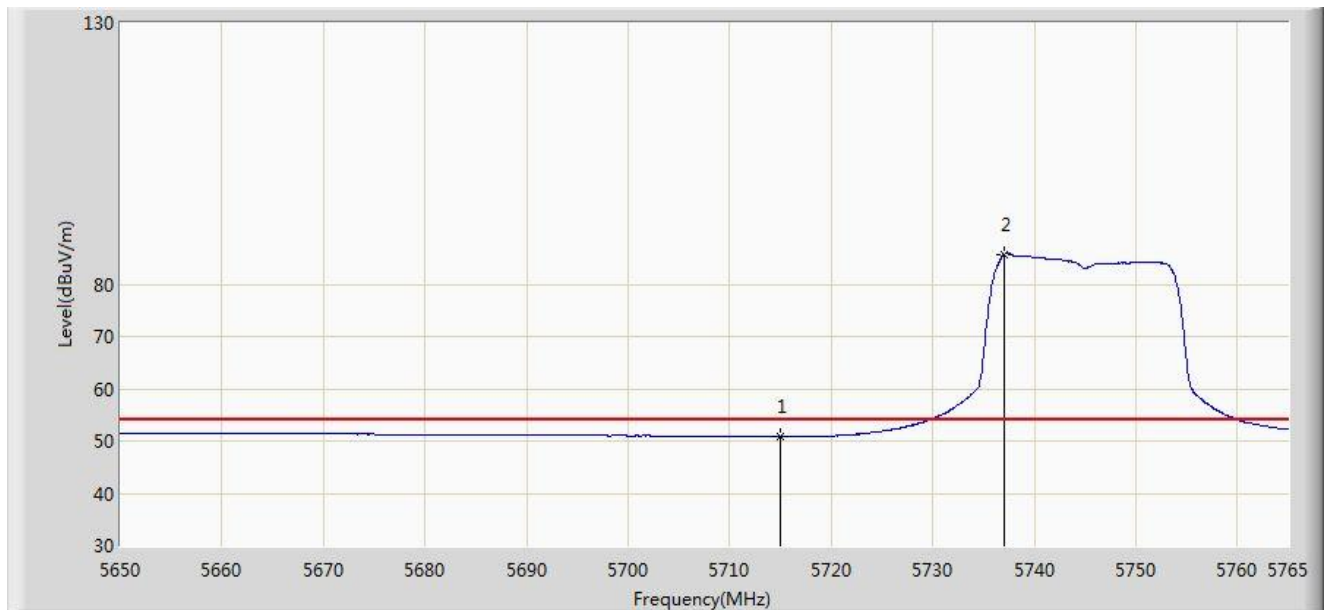


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5715.000        | 50.870                 | 12.921               | -3.130          | 54.000         | 37.949      | AV   |
| 2  |      | *    | 5737.112        | 85.768                 | 47.728               | N/A             | N/A            | 38.039      | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                              |                          |
|--------------------------------------------------------------|--------------------------|
| Site: AC1                                                    | Time: 2015/05/09 - 01:07 |
| Limit: FCC_Part15.209_RE(3m)                                 | Engineer: Milo Li        |
| Probe: BBHA9120D_1-18GHz                                     | Polarity: Vertical       |
| EUT: 802.11ac Dual Band Module                               | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT20 at Channel 5745MHz Ant 0 |                          |

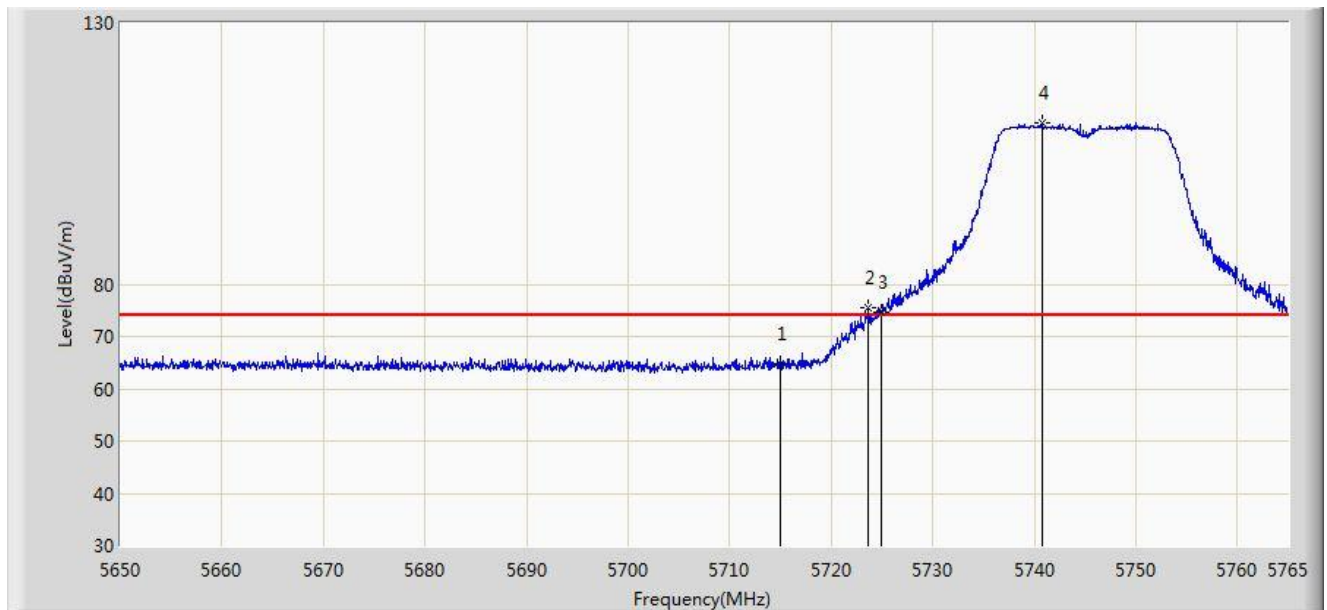


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5715.000        | 64.738                 | 26.789               | -9.262          | 74.000         | 37.949      | PK   |
| 2  |      |      | 5723.658        | 75.585                 | 37.601               | -2.615          | 78.200         | 37.984      | PK   |
| 3  |      |      | 5725.000        | 74.548                 | 36.558               | -3.652          | 78.200         | 37.990      | PK   |
| 4  |      | *    | 5740.850        | 110.917                | 72.863               | N/A             | N/A            | 38.054      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                              |                          |
|--------------------------------------------------------------|--------------------------|
| Site: AC1                                                    | Time: 2015/05/09 - 01:08 |
| Limit: FCC_Part15.209_RE(3m)                                 | Engineer: Milo Li        |
| Probe: BBHA9120D_1-18GHz                                     | Polarity: Vertical       |
| EUT: 802.11ac Dual Band Module                               | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT20 at Channel 5745MHz Ant 0 |                          |

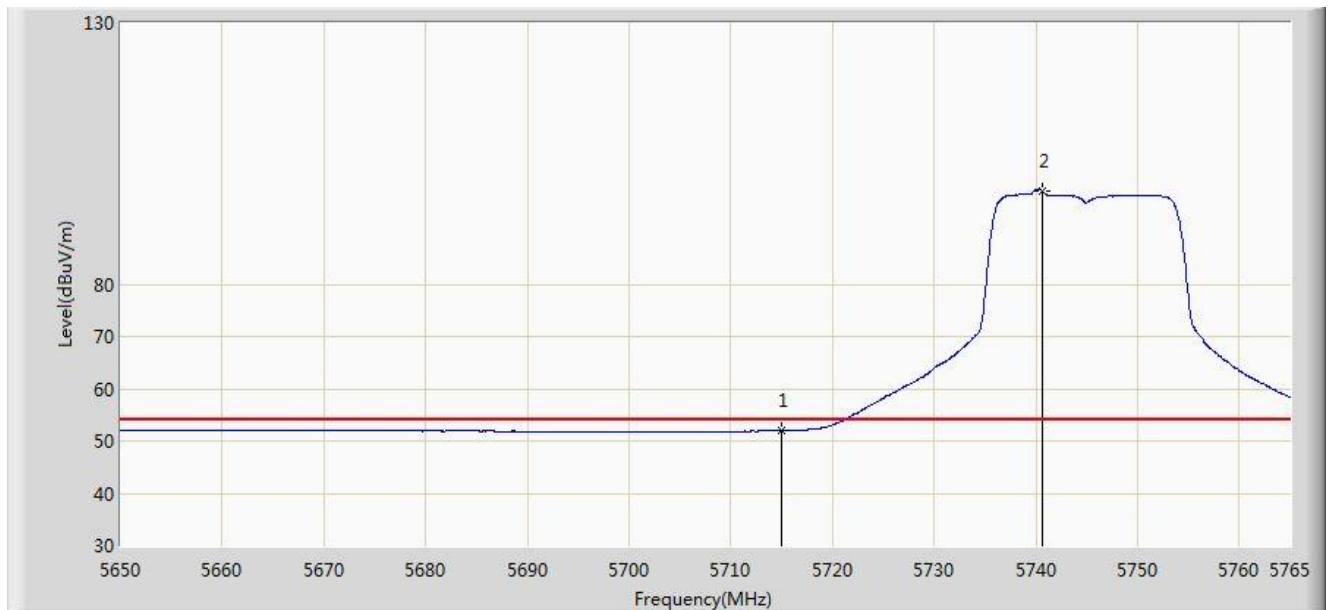


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5715.000        | 52.068                 | 14.119               | -1.932          | 54.000         | 37.949      | AV   |
| 2  |      | *    | 5740.620        | 97.930                 | 59.877               | N/A             | N/A            | 38.053      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                              |                          |
|--------------------------------------------------------------|--------------------------|
| Site: AC1                                                    | Time: 2015/05/09 - 01:21 |
| Limit: FCC_Part15.209_RE(3m)                                 | Engineer: Milo Li        |
| Probe: BBHA9120D_1-18GHz                                     | Polarity: Horizontal     |
| EUT: 802.11ac Dual Band Module                               | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT20 at Channel 5785MHz Ant 0 |                          |

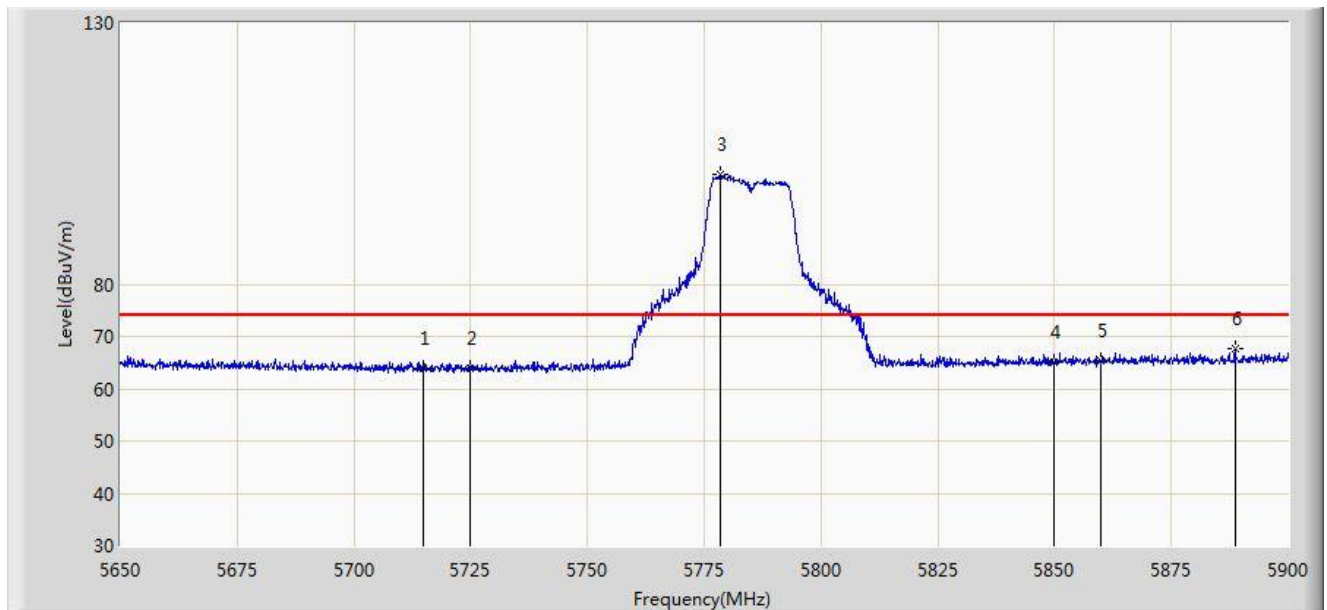


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5715.000        | 64.029                 | 26.080               | -9.971          | 74.000         | 37.949      | PK   |
| 2  |      |      | 5725.000        | 64.000                 | 26.010               | -14.200         | 78.200         | 37.990      | PK   |
| 3  |      | *    | 5778.500        | 100.999                | 62.810               | N/A             | N/A            | 38.189      | PK   |
| 4  |      |      | 5850.000        | 64.979                 | 26.526               | -13.221         | 78.200         | 38.454      | PK   |
| 5  |      |      | 5860.000        | 65.453                 | 26.975               | -8.547          | 74.000         | 38.478      | PK   |
| 6  |      |      | 5888.625        | 67.562                 | 29.054               | -6.438          | 74.000         | 38.508      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                              |                          |
|--------------------------------------------------------------|--------------------------|
| Site: AC1                                                    | Time: 2015/05/09 - 01:23 |
| Limit: FCC_Part15.209_RE(3m)                                 | Engineer: Milo Li        |
| Probe: BBHA9120D_1-18GHz                                     | Polarity: Horizontal     |
| EUT: 802.11ac Dual Band Module                               | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT20 at Channel 5785MHz Ant 0 |                          |

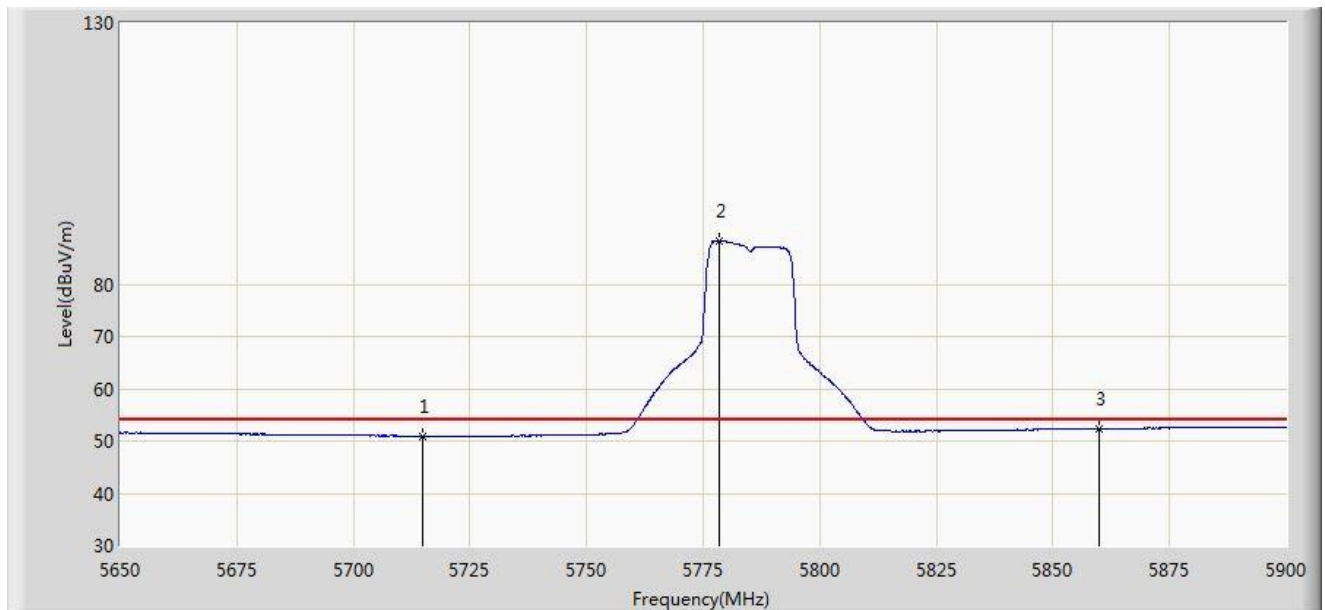


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5715.000        | 50.921                 | 12.972               | -3.079          | 54.000         | 37.949      | AV   |
| 2  |      | *    | 5778.500        | 88.302                 | 50.113               | N/A             | N/A            | 38.189      | AV   |
| 3  |      |      | 5860.000        | 52.395                 | 13.917               | -1.605          | 54.000         | 38.478      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                              |                          |
|--------------------------------------------------------------|--------------------------|
| Site: AC1                                                    | Time: 2015/05/09 - 01:12 |
| Limit: FCC_Part15.209_RE(3m)                                 | Engineer: Milo Li        |
| Probe: BBHA9120D_1-18GHz                                     | Polarity: Vertical       |
| EUT: 802.11ac Dual Band Module                               | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT20 at Channel 5785MHz Ant 0 |                          |

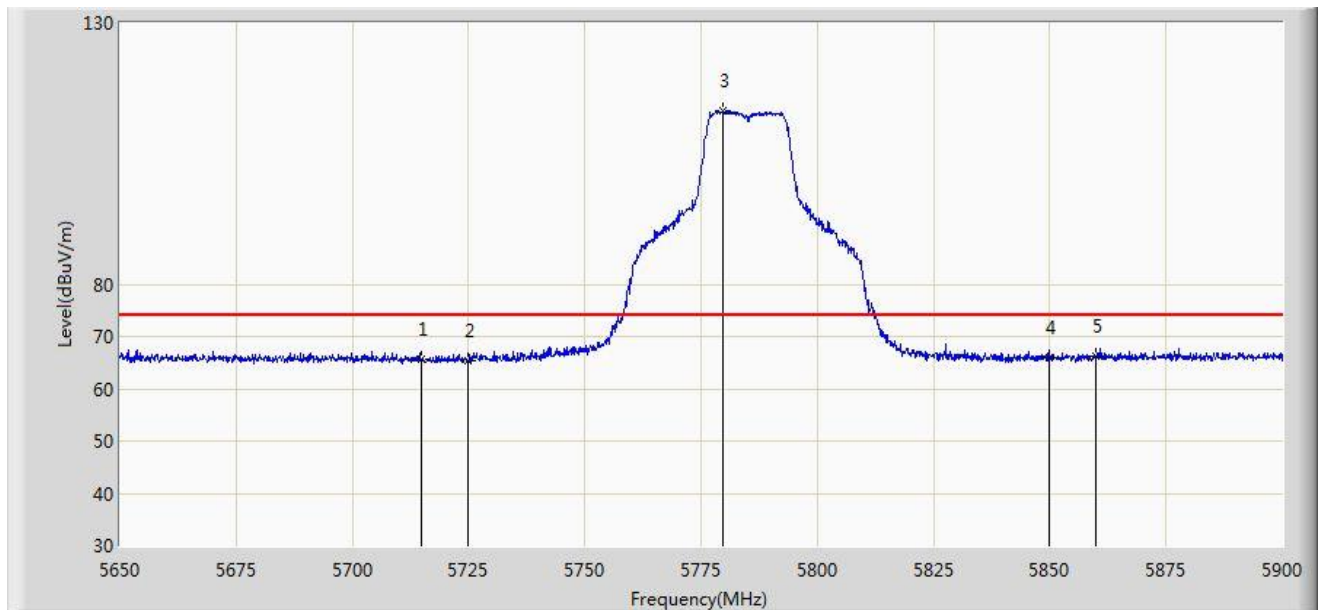


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5715.000        | 65.593                 | 27.644               | -8.407          | 74.000         | 37.949      | PK   |
| 2  |      |      | 5725.000        | 65.386                 | 27.396               | -12.814         | 78.200         | 37.990      | PK   |
| 3  |      | *    | 5779.750        | 113.207                | 75.014               | N/A             | N/A            | 38.193      | PK   |
| 4  |      |      | 5850.000        | 65.908                 | 27.455               | -12.292         | 78.200         | 38.454      | PK   |
| 5  |      |      | 5860.000        | 66.160                 | 27.682               | -7.840          | 74.000         | 38.478      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                              |                          |
|--------------------------------------------------------------|--------------------------|
| Site: AC1                                                    | Time: 2015/05/09 - 01:18 |
| Limit: FCC_Part15.209_RE(3m)                                 | Engineer: Milo Li        |
| Probe: BBHA9120D_1-18GHz                                     | Polarity: Vertical       |
| EUT: 802.11ac Dual Band Module                               | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT20 at Channel 5785MHz Ant 0 |                          |

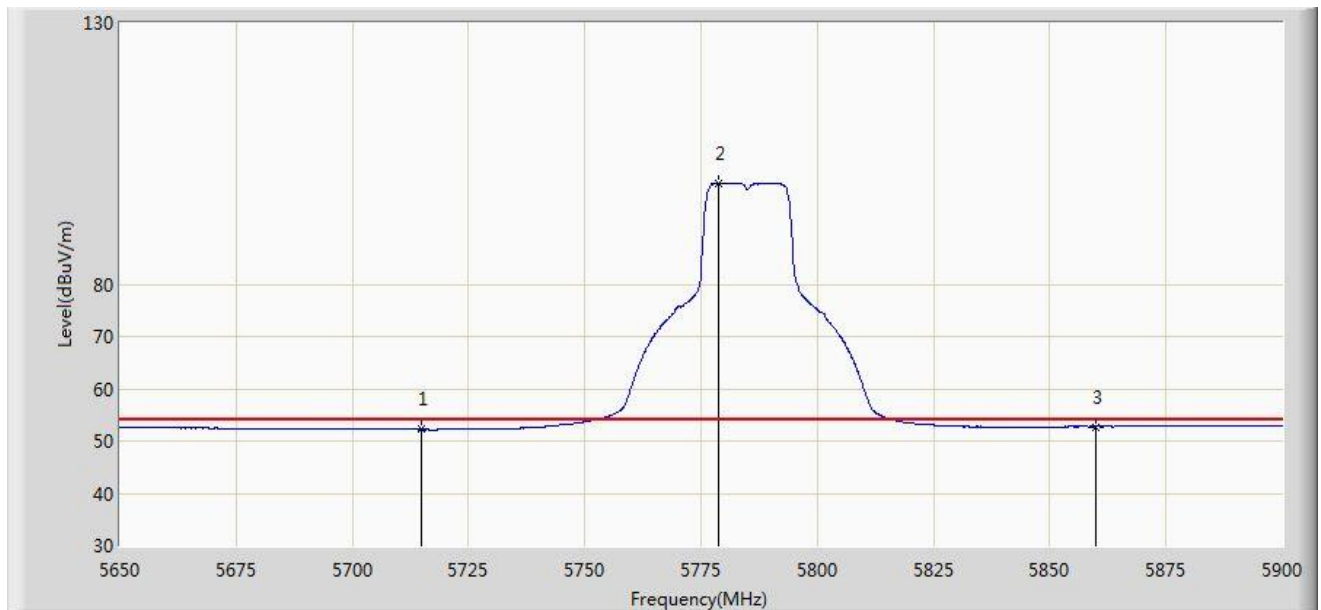


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5715.000        | 52.193                 | 14.244               | -1.807          | 54.000         | 37.949      | AV   |
| 2  |      | *    | 5778.750        | 99.418                 | 61.228               | N/A             | N/A            | 38.189      | AV   |
| 3  |      |      | 5860.000        | 52.734                 | 14.256               | -1.266          | 54.000         | 38.478      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                              |                          |
|--------------------------------------------------------------|--------------------------|
| Site: AC1                                                    | Time: 2015/05/09 - 01:32 |
| Limit: FCC_Part15.209_RE(3m)                                 | Engineer: Milo Li        |
| Probe: BBHA9120D_1-18GHz                                     | Polarity: Horizontal     |
| EUT: 802.11ac Dual Band Module                               | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT20 at Channel 5825MHz Ant 0 |                          |

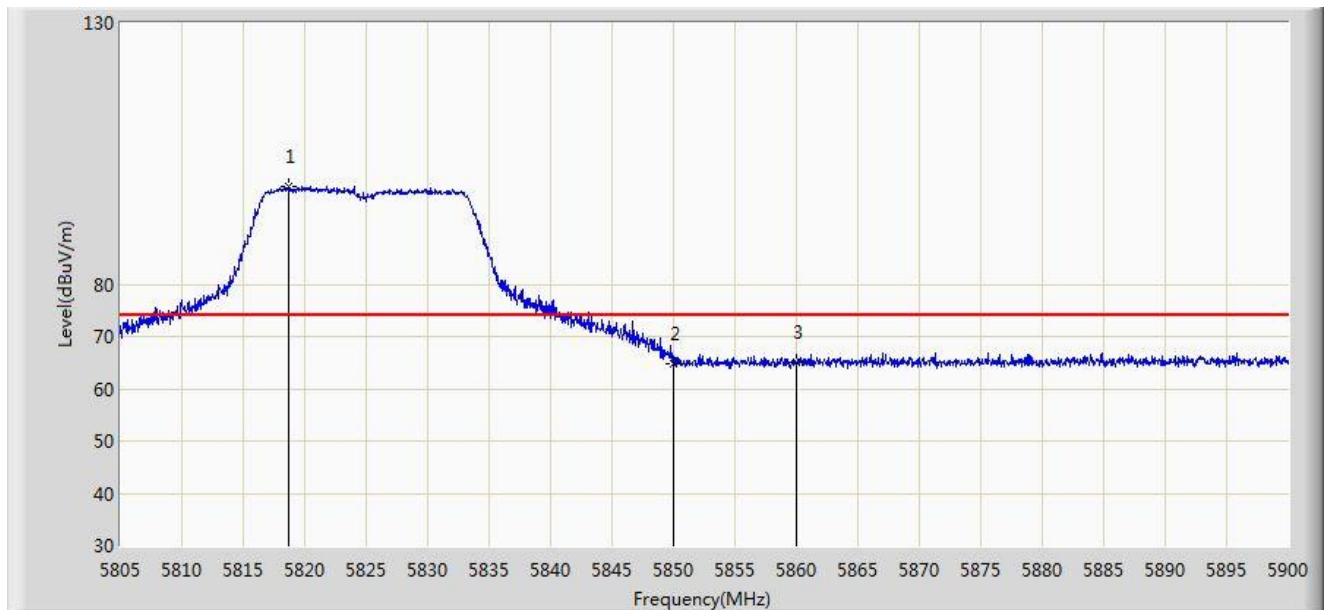


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5818.728        | 98.693                 | 60.363               | N/A             | N/A            | 38.330      | PK   |
| 2  |      |      | 5850.000        | 64.896                 | 26.443               | -13.304         | 78.200         | 38.454      | PK   |
| 3  |      |      | 5860.000        | 65.034                 | 26.556               | -8.966          | 74.000         | 38.478      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                              |                          |
|--------------------------------------------------------------|--------------------------|
| Site: AC1                                                    | Time: 2015/05/09 - 01:33 |
| Limit: FCC_Part15.209_RE(3m)                                 | Engineer: Milo Li        |
| Probe: BBHA9120D_1-18GHz                                     | Polarity: Horizontal     |
| EUT: 802.11ac Dual Band Module                               | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT20 at Channel 5825MHz Ant 0 |                          |

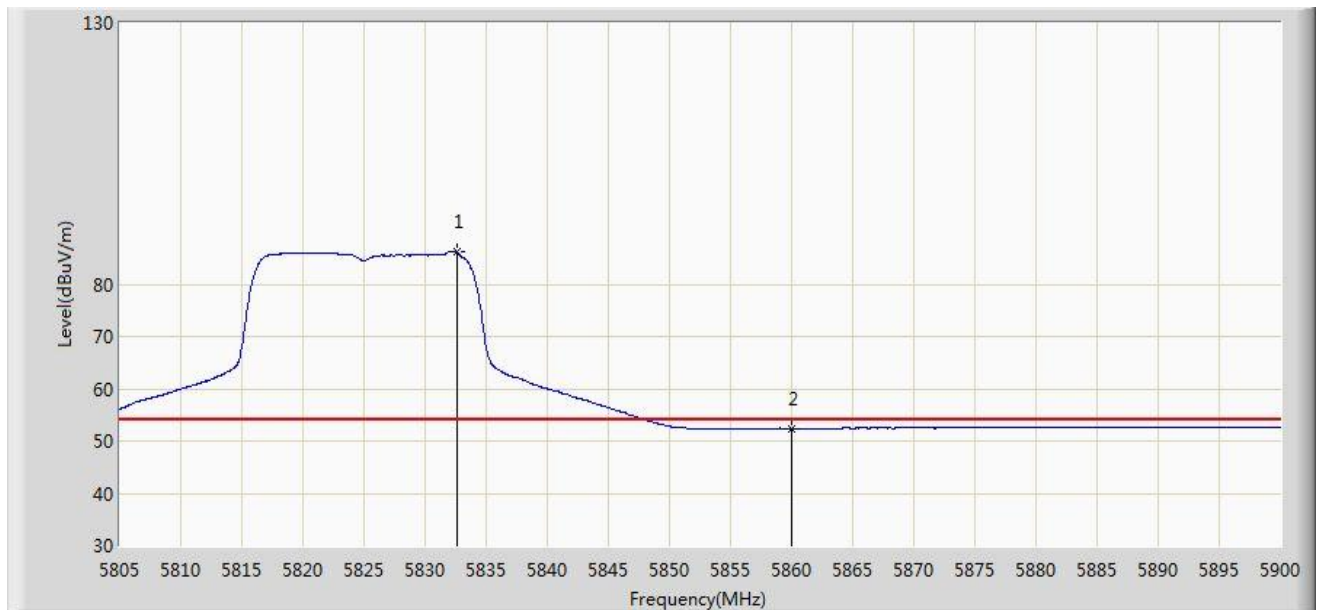


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5832.598        | 86.140                 | 47.752               | N/A             | N/A            | 38.388      | AV   |
| 2  |      |      | 5860.000        | 52.404                 | 13.926               | -1.596          | 54.000         | 38.478      | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                              |                          |
|--------------------------------------------------------------|--------------------------|
| Site: AC1                                                    | Time: 2015/05/09 - 01:24 |
| Limit: FCC_Part15.209_RE(3m)                                 | Engineer: Milo Li        |
| Probe: BBHA9120D_1-18GHz                                     | Polarity: Vertical       |
| EUT: 802.11ac Dual Band Module                               | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT20 at Channel 5825MHz Ant 0 |                          |

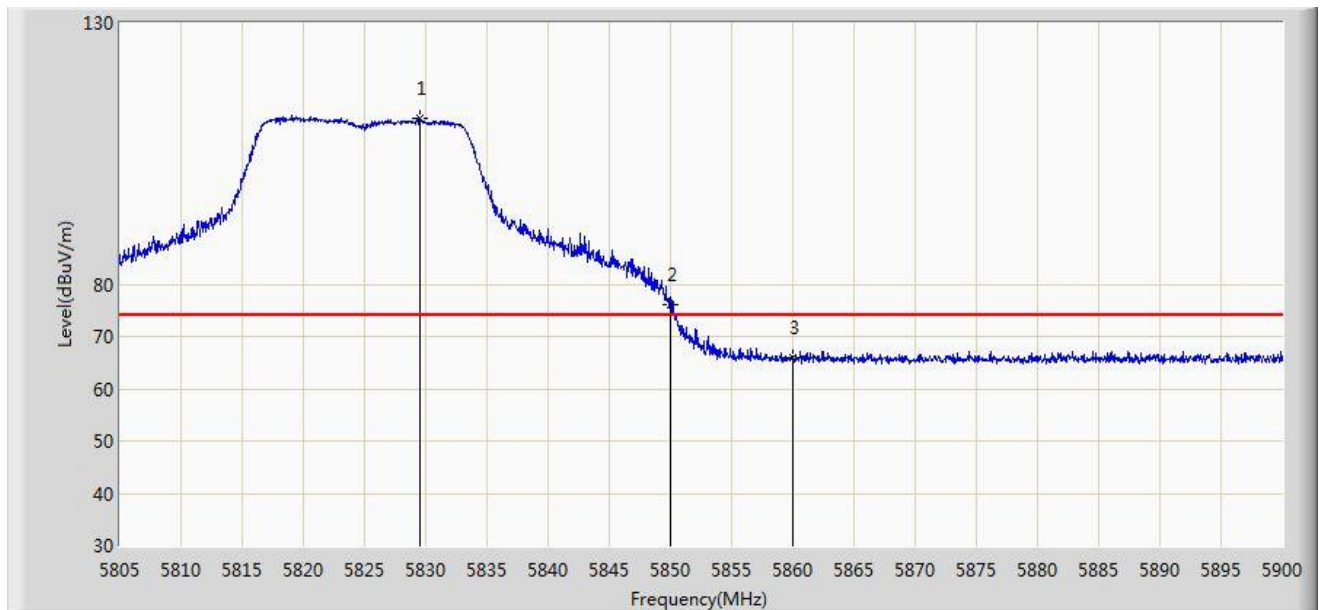


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5829.558        | 111.657                | 73.282               | N/A             | N/A            | 38.374      | PK   |
| 2  |      |      | 5850.000        | 75.970                 | 37.517               | -2.23           | 78.200         | 38.454      | PK   |
| 3  |      |      | 5860.000        | 66.033                 | 27.555               | -7.967          | 74.000         | 38.478      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                              |                          |
|--------------------------------------------------------------|--------------------------|
| Site: AC1                                                    | Time: 2015/05/09 - 01:28 |
| Limit: FCC_Part15.209_RE(3m)                                 | Engineer: Milo Li        |
| Probe: BBHA9120D_1-18GHz                                     | Polarity: Vertical       |
| EUT: 802.11ac Dual Band Module                               | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT20 at Channel 5825MHz Ant 0 |                          |

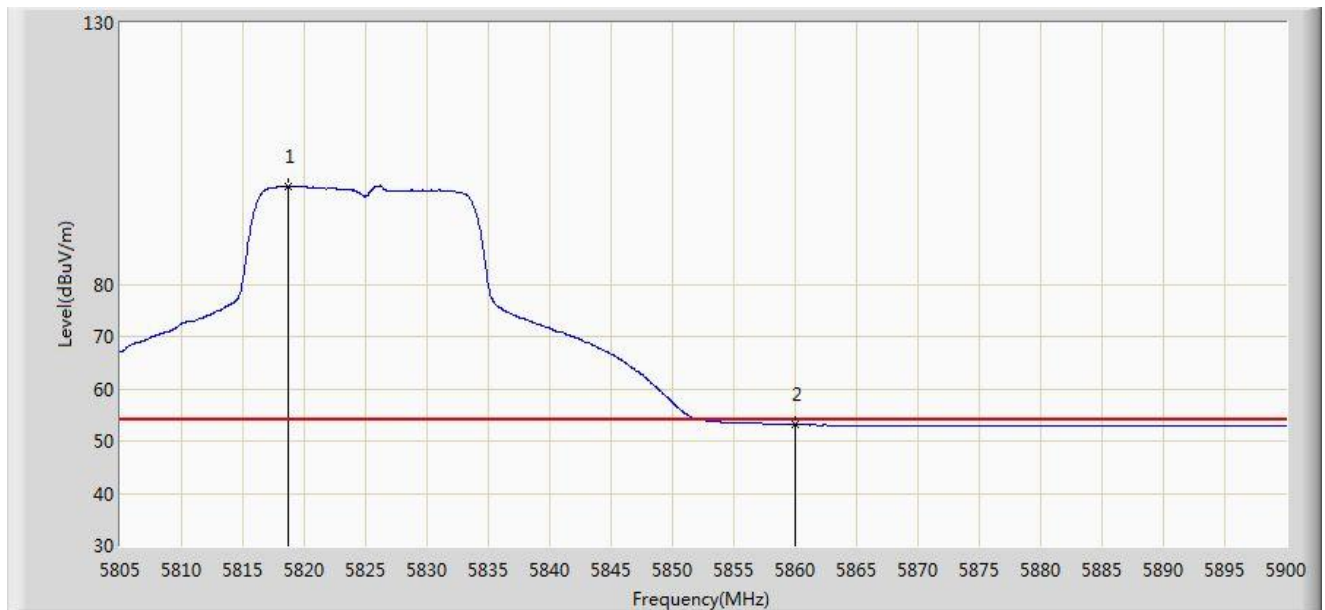


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5818.680        | 98.705                 | 60.376               | N/A             | N/A            | 38.329      | AV   |
| 2  |      |      | 5860.000        | 53.128                 | 14.650               | -0.872          | 54.000         | 38.478      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                              |                          |
|--------------------------------------------------------------|--------------------------|
| Site: AC1                                                    | Time: 2015/05/09 - 01:38 |
| Limit: FCC_Part15.209_RE(3m)                                 | Engineer: Milo Li        |
| Probe: BBHA9120D_1-18GHz                                     | Polarity: Horizontal     |
| EUT: 802.11ac Dual Band Module                               | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT40 at Channel 5190MHz Ant 0 |                          |

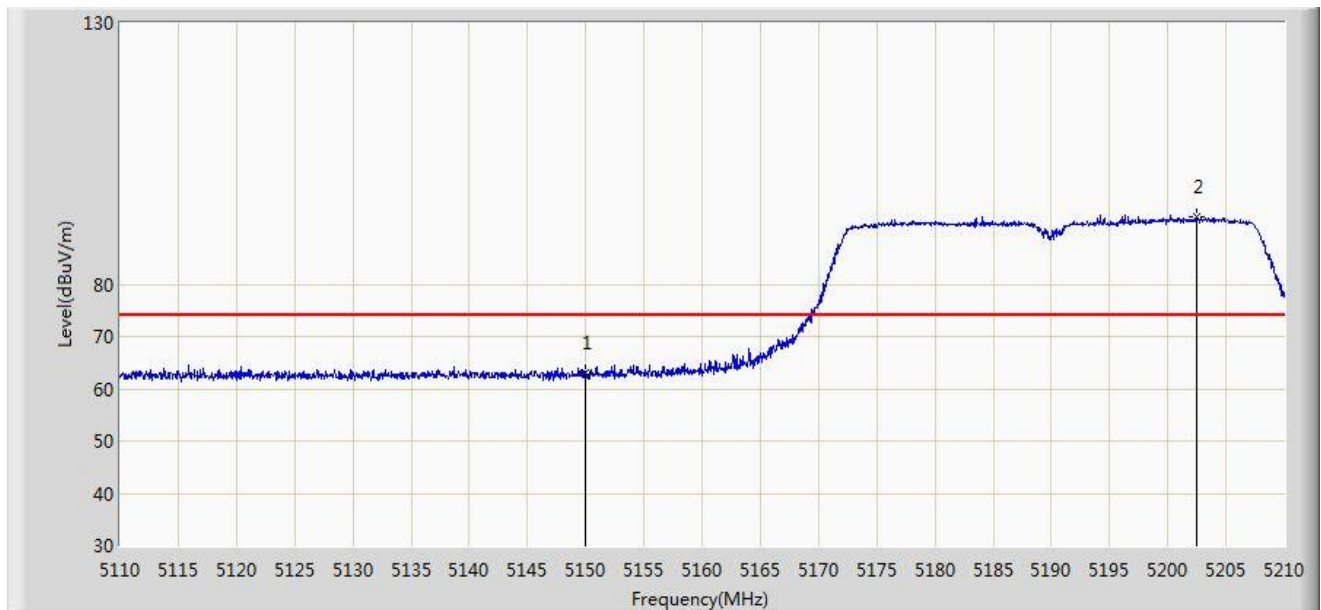


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5150.000        | 63.022                 | 25.570               | -10.978         | 74.000         | 37.452      | PK   |
| 2  |      | *    | 5202.450        | 92.979                 | 55.663               | N/A             | N/A            | 37.316      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                              |                          |
|--------------------------------------------------------------|--------------------------|
| Site: AC1                                                    | Time: 2015/05/09 - 01:39 |
| Limit: FCC_Part15.209_RE(3m)                                 | Engineer: Milo Li        |
| Probe: BBHA9120D_1-18GHz                                     | Polarity: Horizontal     |
| EUT: 802.11ac Dual Band Module                               | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT40 at Channel 5190MHz Ant 0 |                          |

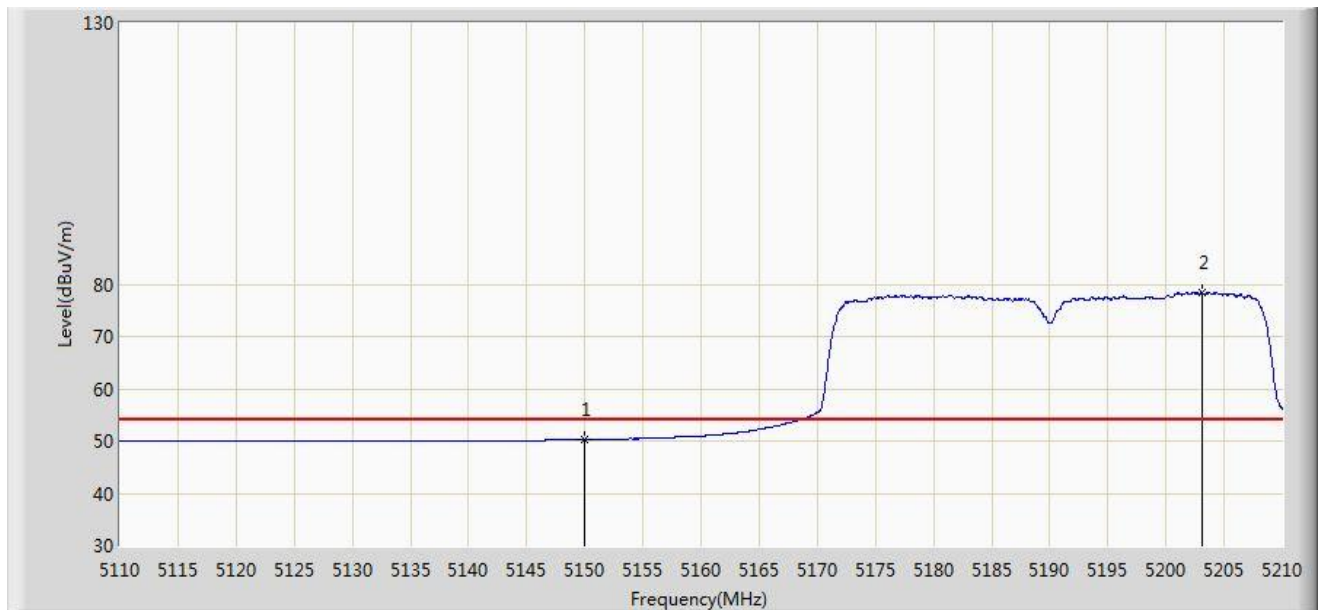


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5150.000        | 50.249                 | 12.797               | -3.751          | 54.000         | 37.452      | AV   |
| 2  |      | *    | 5203.100        | 78.356                 | 41.042               | N/A             | N/A            | 37.314      | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                              |                          |
|--------------------------------------------------------------|--------------------------|
| Site: AC1                                                    | Time: 2015/05/16 - 18:22 |
| Limit: FCC_Part15.209_RE(3m)                                 | Engineer: Milo Li        |
| Probe: BBHA9120D_1-18GHz                                     | Polarity: Vertical       |
| EUT: 802.11ac Dual Band Module                               | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT40 at Channel 5190MHz Ant 0 |                          |

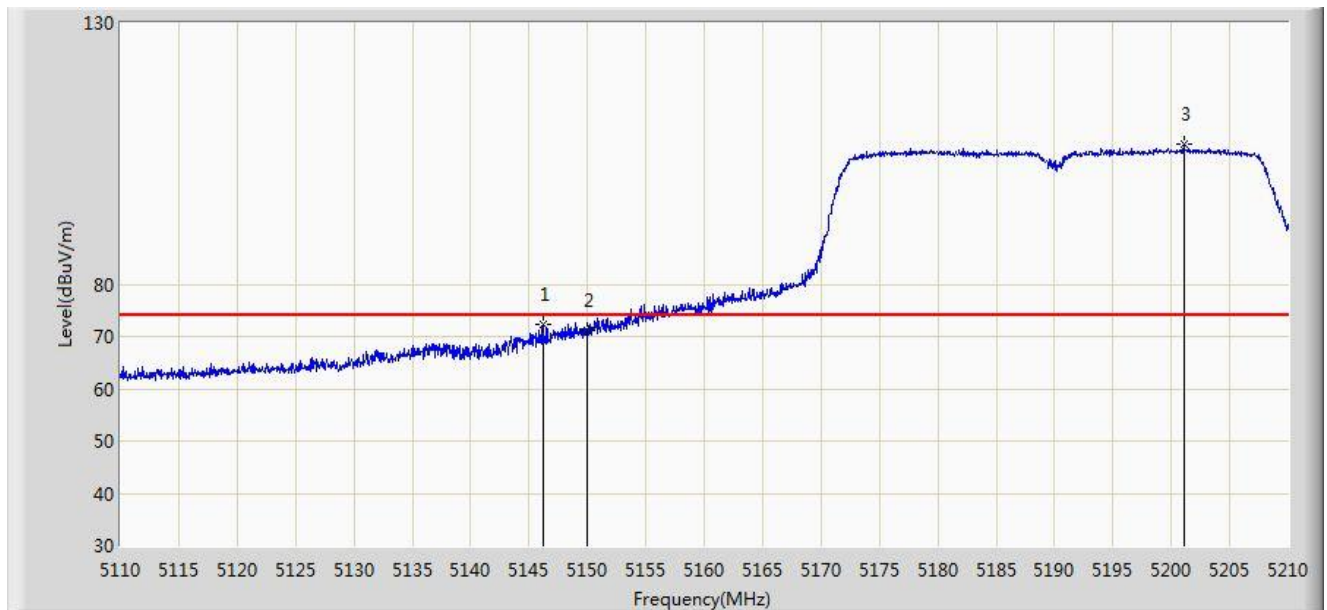


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5146.200        | 72.349                 | 34.892               | -1.651          | 74.000         | 37.457      | PK   |
| 2  |      |      | 5150.000        | 71.253                 | 33.801               | -2.747          | 74.000         | 37.452      | PK   |
| 3  |      | *    | 5201.050        | 106.818                | 69.497               | N/A             | N/A            | 37.321      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                              |                          |
|--------------------------------------------------------------|--------------------------|
| Site: AC1                                                    | Time: 2015/05/09 - 01:37 |
| Limit: FCC_Part15.209_RE(3m)                                 | Engineer: Milo Li        |
| Probe: BBHA9120D_1-18GHz                                     | Polarity: Vertical       |
| EUT: 802.11ac Dual Band Module                               | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT40 at Channel 5190MHz Ant 0 |                          |

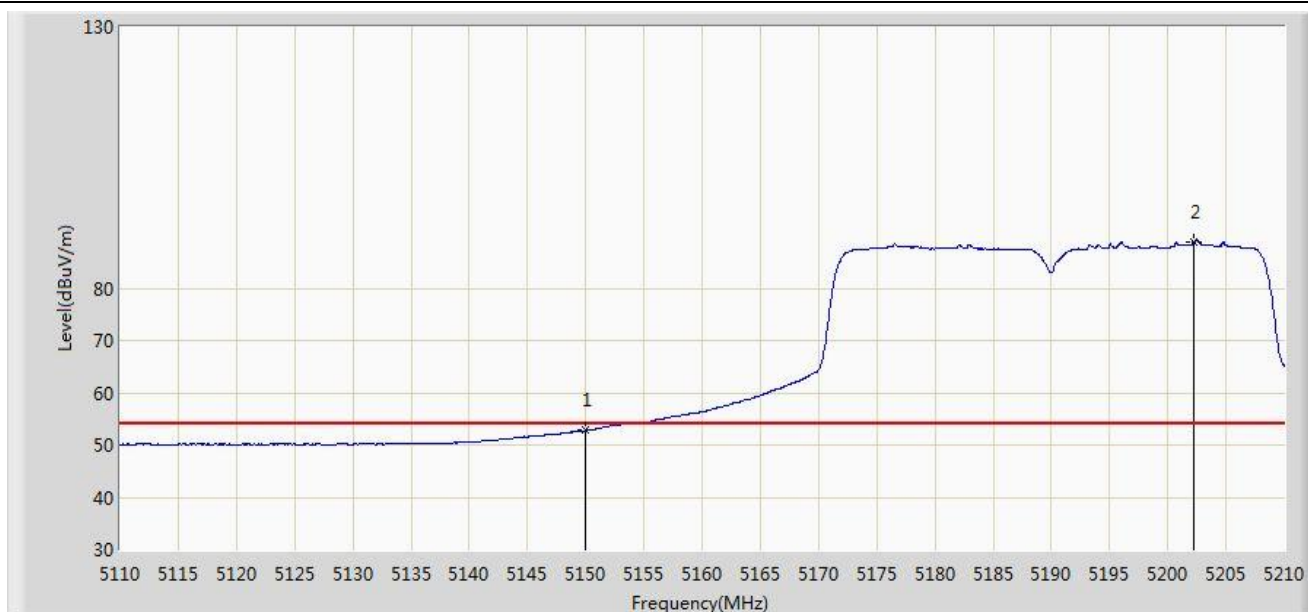


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5150.000        | 52.761                 | 15.309               | -1.239          | 54.000         | 37.452      | AV   |
| 2  |      | *    | 5202.200        | 88.857                 | 51.540               | N/A             | N/A            | 37.316      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                              |                          |
|--------------------------------------------------------------|--------------------------|
| Site: AC1                                                    | Time: 2015/05/09 - 01:47 |
| Limit: FCC_Part15.209_RE(3m)                                 | Engineer: Milo Li        |
| Probe: BBHA9120D_1-18GHz                                     | Polarity: Horizontal     |
| EUT: 802.11ac Dual Band Module                               | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT40 at Channel 5310MHz Ant 0 |                          |

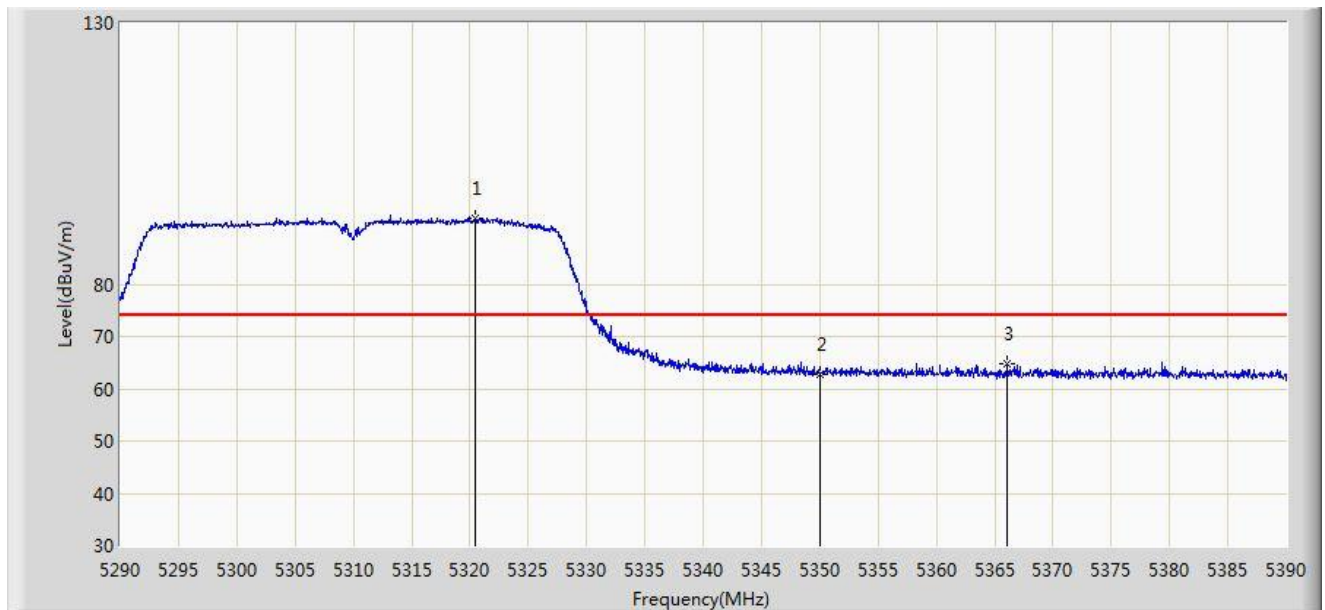


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5320.400        | 92.596                 | 55.382               | N/A             | N/A            | 37.214      | PK   |
| 2  |      |      | 5350.000        | 62.854                 | 25.568               | -11.146         | 74.000         | 37.286      | PK   |
| 3  |      |      | 5366.100        | 64.719                 | 27.388               | -9.281          | 74.000         | 37.330      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                              |                          |
|--------------------------------------------------------------|--------------------------|
| Site: AC1                                                    | Time: 2015/05/09 - 01:48 |
| Limit: FCC_Part15.209_RE(3m)                                 | Engineer: Milo Li        |
| Probe: BBHA9120D_1-18GHz                                     | Polarity: Horizontal     |
| EUT: 802.11ac Dual Band Module                               | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT40 at Channel 5310MHz Ant 0 |                          |

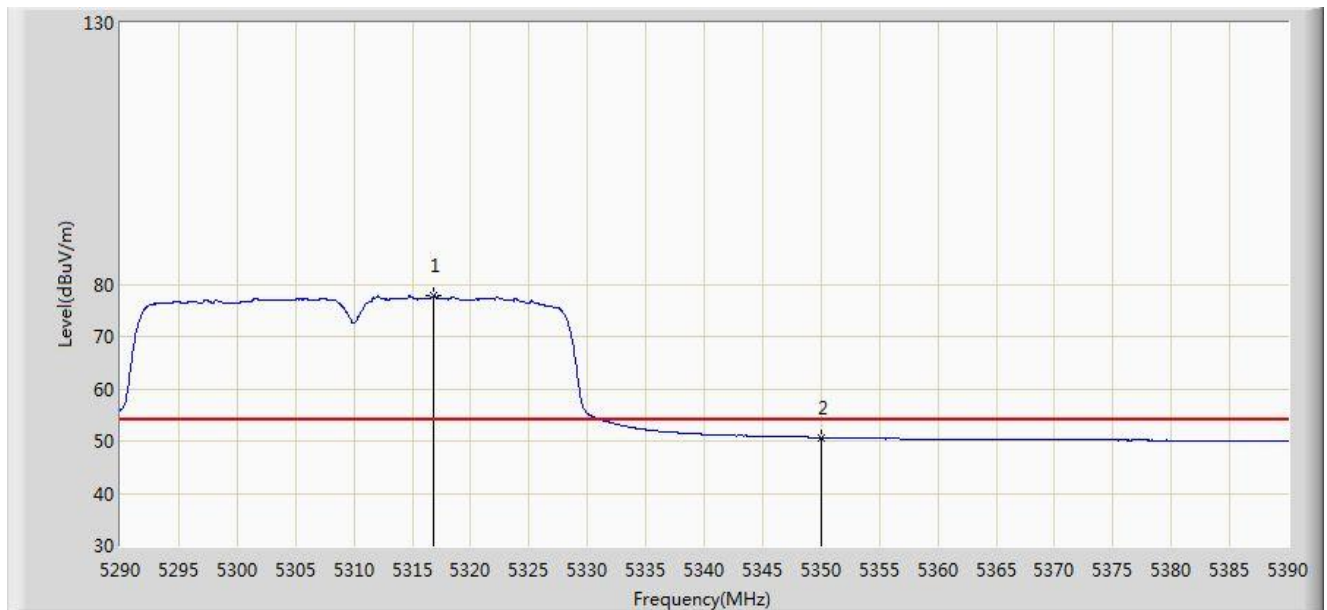


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5316.850        | 77.706                 | 40.498               | N/A             | N/A            | 37.208      | AV   |
| 2  |      |      | 5350.000        | 50.658                 | 13.372               | -3.342          | 54.000         | 37.286      | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                              |                          |
|--------------------------------------------------------------|--------------------------|
| Site: AC1                                                    | Time: 2015/05/09 - 01:46 |
| Limit: FCC_Part15.209_RE(3m)                                 | Engineer: Milo Li        |
| Probe: BBHA9120D_1-18GHz                                     | Polarity: Vertical       |
| EUT: 802.11ac Dual Band Module                               | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT40 at Channel 5310MHz Ant 0 |                          |

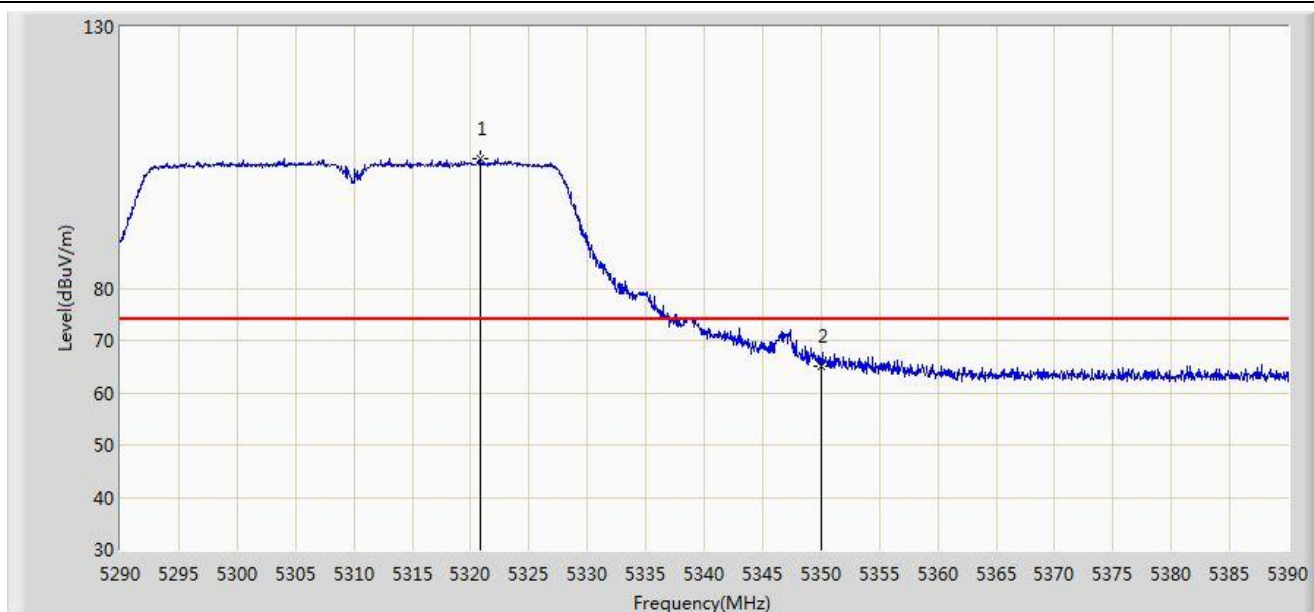


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5320.800        | 104.845                | 67.630               | N/A             | N/A            | 37.215      | PK   |
| 2  |      |      | 5350.000        | 65.016                 | 27.730               | -8.984          | 74.000         | 37.286      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                              |                          |
|--------------------------------------------------------------|--------------------------|
| Site: AC1                                                    | Time: 2015/05/09 - 01:45 |
| Limit: FCC_Part15.209_RE(3m)                                 | Engineer: Milo Li        |
| Probe: BBHA9120D_1-18GHz                                     | Polarity: Vertical       |
| EUT: 802.11ac Dual Band Module                               | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT40 at Channel 5310MHz Ant 0 |                          |

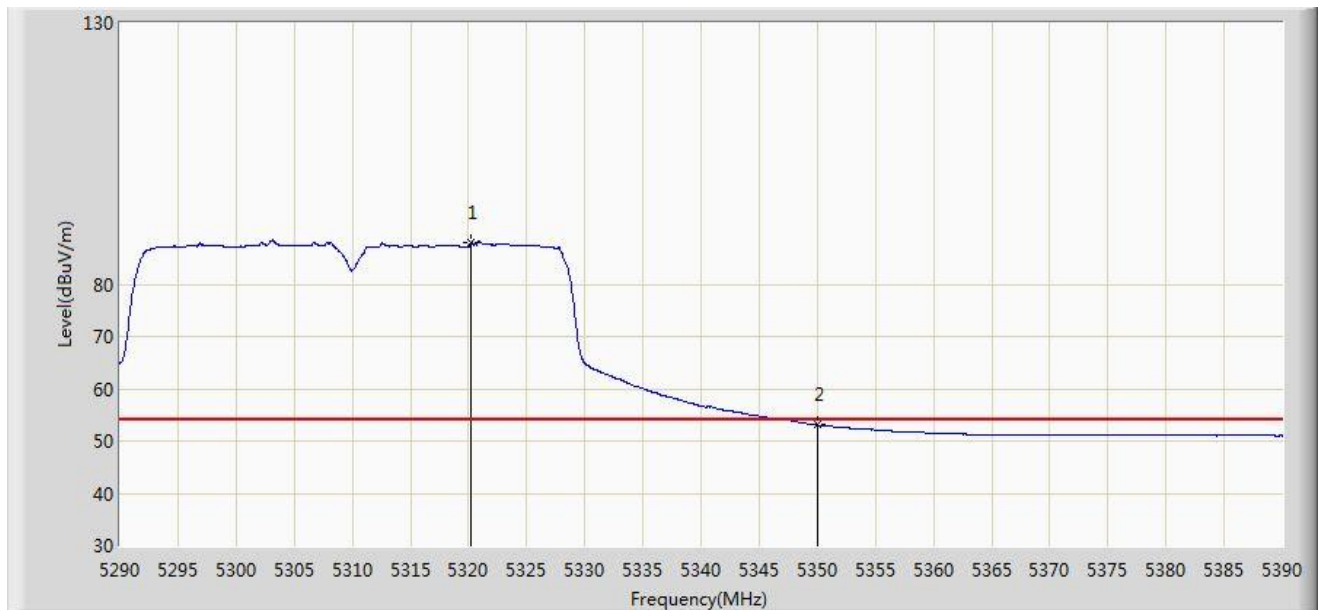


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5320.200        | 87.930                 | 50.716               | N/A             | N/A            | 37.214      | AV   |
| 2  |      |      | 5350.000        | 53.102                 | 15.816               | -0.898          | 54.000         | 37.286      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                              |                          |
|--------------------------------------------------------------|--------------------------|
| Site: AC1                                                    | Time: 2015/05/09 - 01:52 |
| Limit: FCC_Part15.209_RE(3m)                                 | Engineer: Milo Li        |
| Probe: BBHA9120D_1-18GHz                                     | Polarity: Horizontal     |
| EUT: 802.11ac Dual Band Module                               | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT40 at Channel 5510MHz Ant 0 |                          |

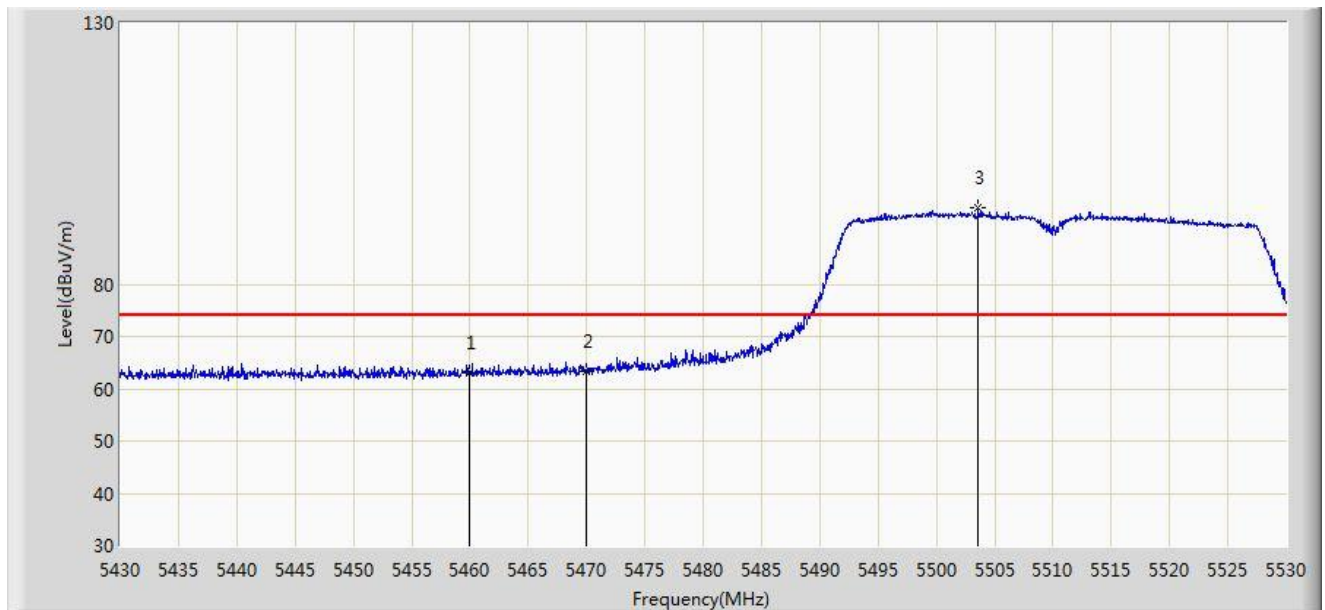


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5460.000        | 63.009                 | 25.446               | -10.991         | 74.000         | 37.563      | PK   |
| 2  |      |      | 5470.000        | 63.303                 | 25.714               | -10.697         | 74.000         | 37.588      | PK   |
| 3  |      | *    | 5503.600        | 94.601                 | 56.973               | N/A             | N/A            | 37.628      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                              |                          |
|--------------------------------------------------------------|--------------------------|
| Site: AC1                                                    | Time: 2015/05/09 - 01:53 |
| Limit: FCC_Part15.209_RE(3m)                                 | Engineer: Milo Li        |
| Probe: BBHA9120D_1-18GHz                                     | Polarity: Horizontal     |
| EUT: 802.11ac Dual Band Module                               | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT40 at Channel 5510MHz Ant 0 |                          |

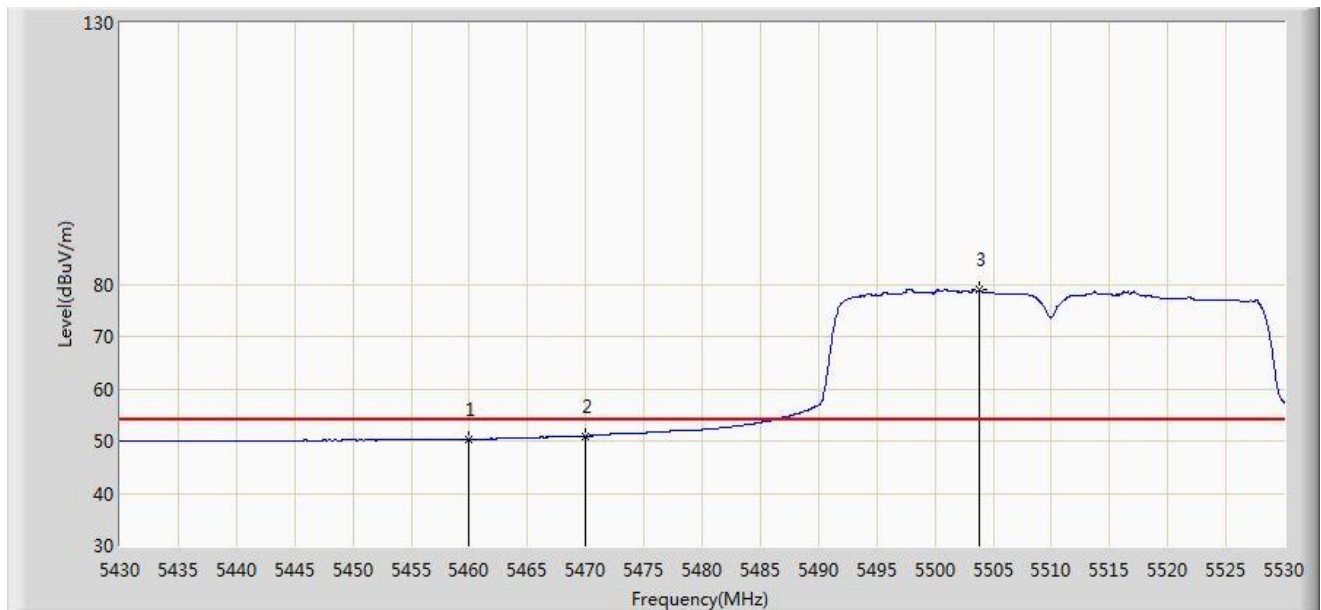


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5460.000        | 50.324                 | 12.761               | -3.676          | 54.000         | 37.563      | AV   |
| 2  |      |      | 5470.000        | 50.978                 | 13.389               | -3.022          | 54.000         | 37.588      | AV   |
| 3  |      | *    | 5503.800        | 79.025                 | 41.397               | N/A             | N/A            | 37.629      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                              |                          |
|--------------------------------------------------------------|--------------------------|
| Site: AC1                                                    | Time: 2015/05/17 - 00:06 |
| Limit: FCC_Part15.209_RE(3m)                                 | Engineer: Milo Li        |
| Probe: BBHA9120D_1-18GHz                                     | Polarity: Vertical       |
| EUT: 802.11ac Dual Band Module                               | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT40 at Channel 5510MHz Ant 0 |                          |

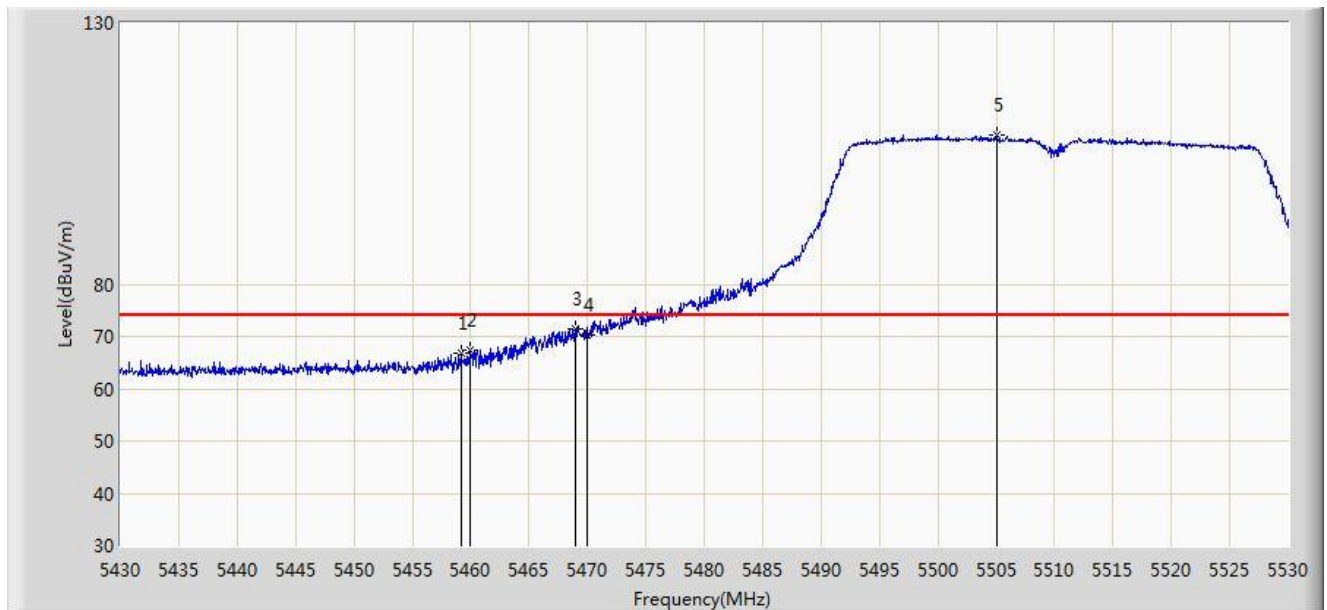


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5459.200        | 66.804                 | 29.244               | -7.196          | 74.000         | 37.560      | PK   |
| 2  |      |      | 5460.000        | 67.294                 | 29.731               | -6.706          | 74.000         | 37.563      | PK   |
| 3  |      |      | 5468.950        | 71.535                 | 33.949               | -2.465          | 74.000         | 37.586      | PK   |
| 4  |      |      | 5470.000        | 70.249                 | 32.661               | -3.751          | 74.000         | 37.588      | PK   |
| 5  |      | *    | 5505.000        | 108.441                | 70.811               | N/A             | N/A            | 37.630      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                              |                          |
|--------------------------------------------------------------|--------------------------|
| Site: AC1                                                    | Time: 2015/05/17 - 00:10 |
| Limit: FCC_Part15.209_RE(3m)                                 | Engineer: Milo Li        |
| Probe: BBHA9120D_1-18GHz                                     | Polarity: Vertical       |
| EUT: 802.11ac Dual Band Module                               | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT40 at Channel 5510MHz Ant 0 |                          |

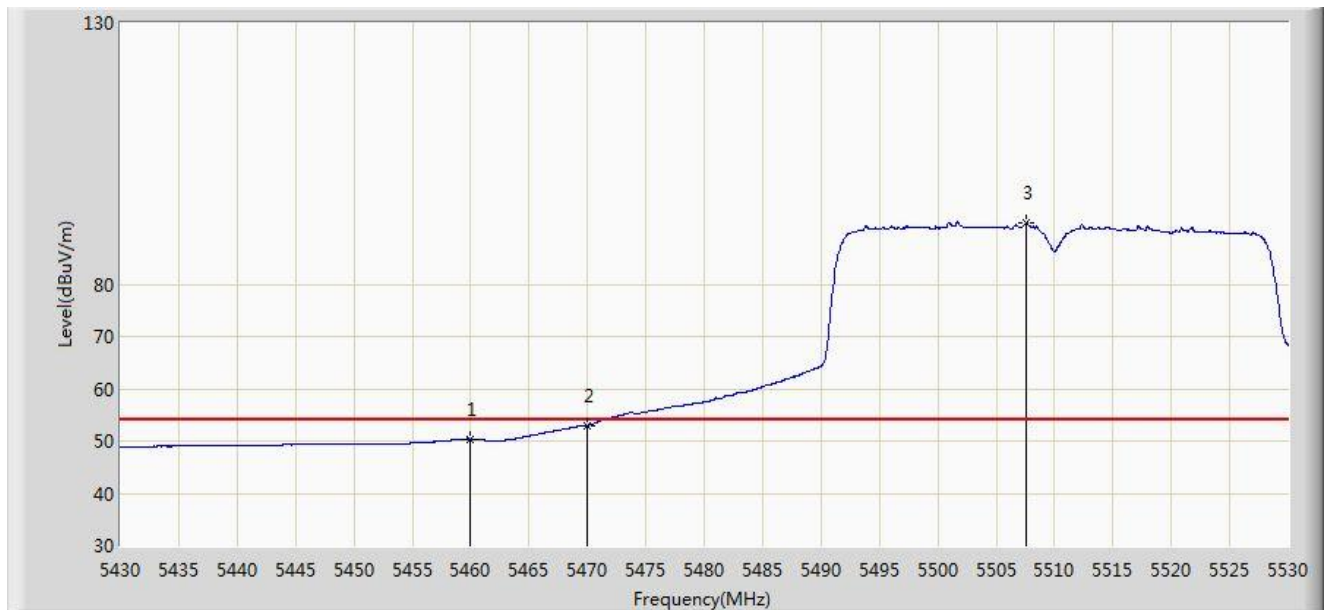


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5460.000        | 50.377                 | 12.814               | -3.623          | 54.000         | 37.563      | AV   |
| 2  |      |      | 5470.000        | 53.017                 | 15.429               | -0.983          | 54.000         | 37.588      | AV   |
| 3  |      | *    | 5507.550        | 91.660                 | 54.028               | N/A             | N/A            | 37.632      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                              |                          |
|--------------------------------------------------------------|--------------------------|
| Site: AC1                                                    | Time: 2015/05/09 - 02:01 |
| Limit: FCC_Part15.209_RE(3m)                                 | Engineer: Milo Li        |
| Probe: BBHA9120D_1-18GHz                                     | Polarity: Horizontal     |
| EUT: 802.11ac Dual Band Module                               | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT40 at Channel 5670MHz Ant 0 |                          |

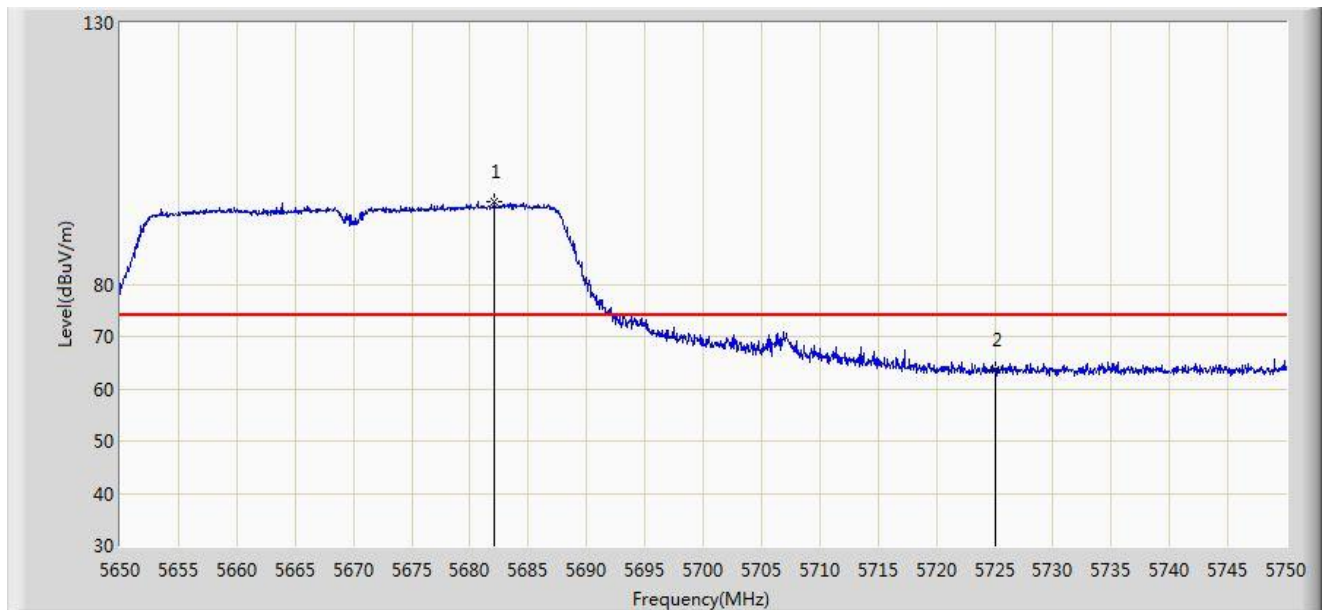


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5682.100        | 95.845                 | 58.007               | N/A             | N/A            | 37.838      | PK   |
| 2  |      |      | 5725.000        | 63.675                 | 25.685               | -10.325         | 74.000         | 37.990      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                              |                          |
|--------------------------------------------------------------|--------------------------|
| Site: AC1                                                    | Time: 2015/05/09 - 02:02 |
| Limit: FCC_Part15.209_RE(3m)                                 | Engineer: Milo Li        |
| Probe: BBHA9120D_1-18GHz                                     | Polarity: Horizontal     |
| EUT: 802.11ac Dual Band Module                               | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT40 at Channel 5670MHz Ant 0 |                          |

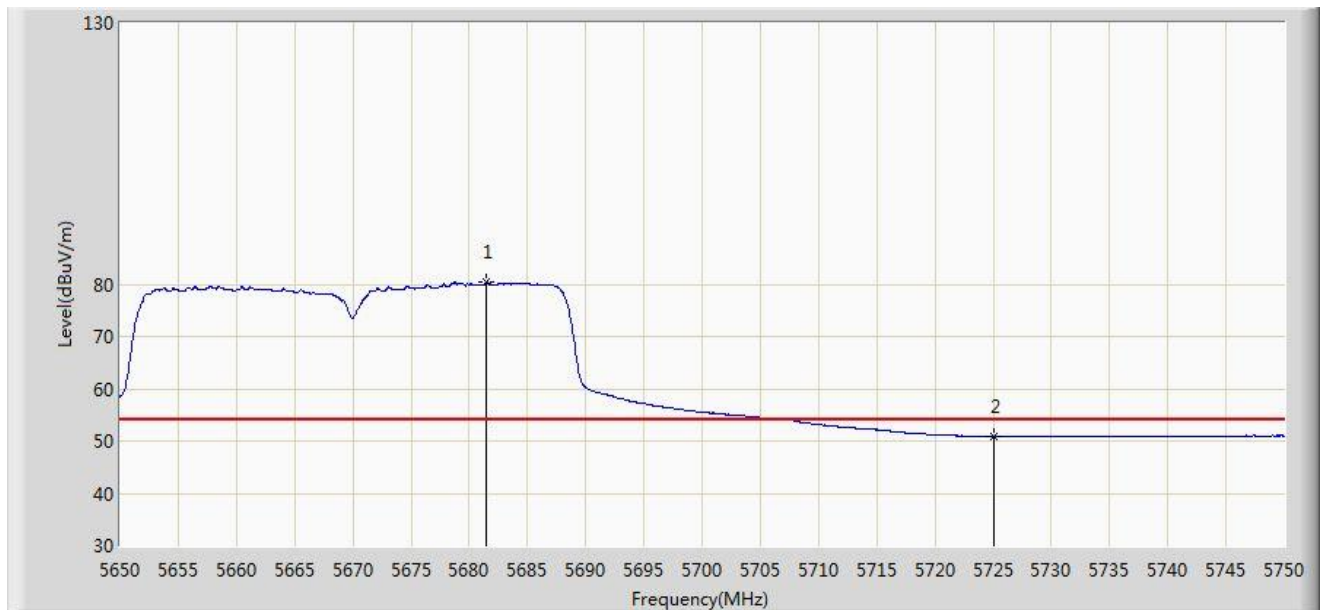


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5681.500        | 80.478                 | 42.642               | N/A             | N/A            | 37.836      | AV   |
| 2  |      |      | 5725.000        | 50.901                 | 12.911               | -3.099          | 54.000         | 37.990      | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                              |                          |
|--------------------------------------------------------------|--------------------------|
| Site: AC1                                                    | Time: 2015/05/09 - 01:56 |
| Limit: FCC_Part15.209_RE(3m)                                 | Engineer: Milo Li        |
| Probe: BBHA9120D_1-18GHz                                     | Polarity: Vertical       |
| EUT: 802.11ac Dual Band Module                               | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT40 at Channel 5670MHz Ant 0 |                          |

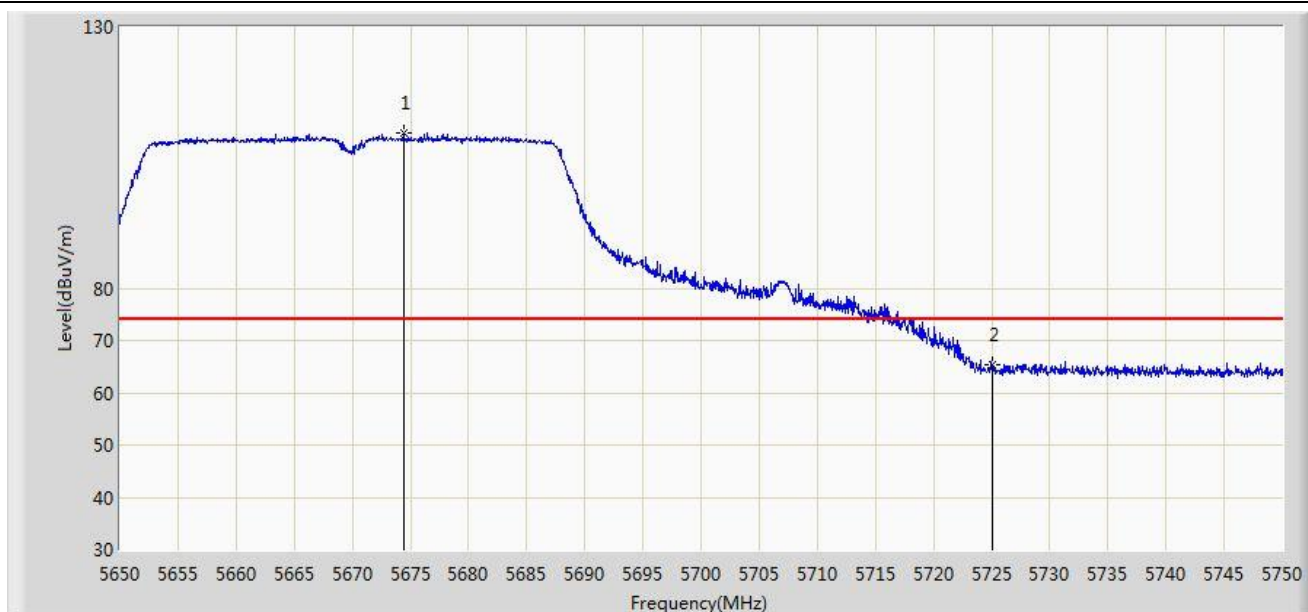


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5674.400        | 109.779                | 71.964               | N/A             | N/A            | 37.815      | PK   |
| 2  |      |      | 5725.000        | 65.336                 | 27.346               | -8.664          | 74.000         | 37.990      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                              |                          |
|--------------------------------------------------------------|--------------------------|
| Site: AC1                                                    | Time: 2015/05/09 - 01:57 |
| Limit: FCC_Part15.209_RE(3m)                                 | Engineer: Milo Li        |
| Probe: BBHA9120D_1-18GHz                                     | Polarity: Vertical       |
| EUT: 802.11ac Dual Band Module                               | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT40 at Channel 5670MHz Ant 0 |                          |

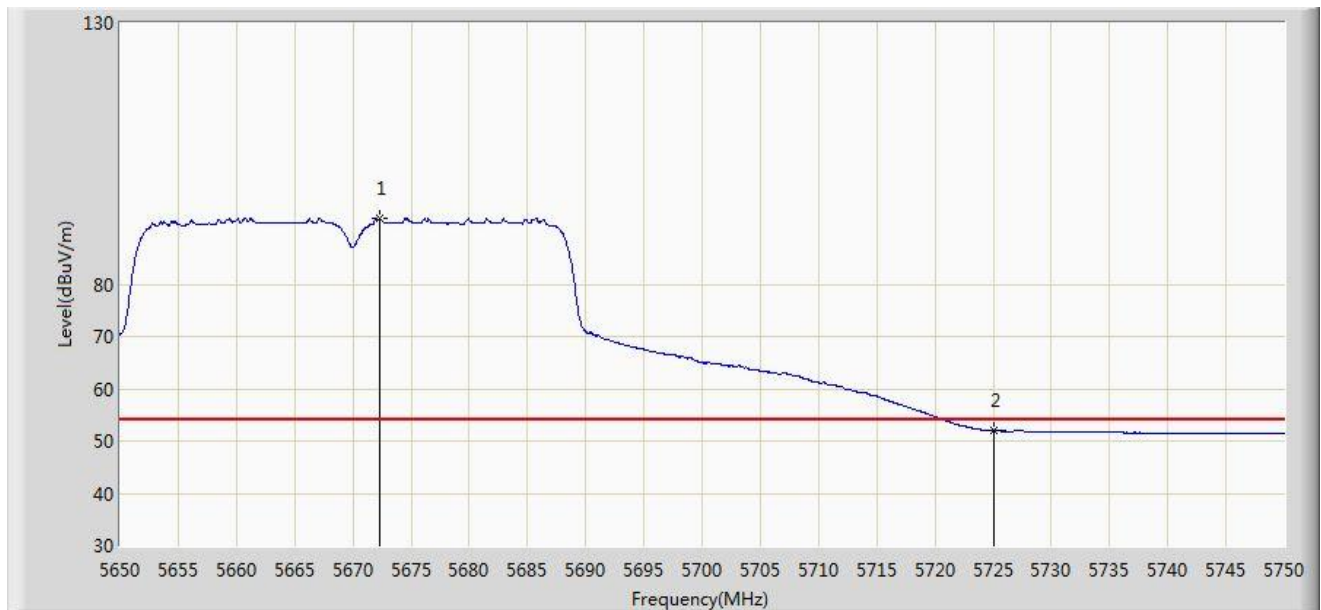


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5672.250        | 92.590                 | 54.778               | N/A             | N/A            | 37.813      | AV   |
| 2  |      |      | 5725.000        | 51.921                 | 13.931               | -2.079          | 54.000         | 37.990      | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                              |                          |
|--------------------------------------------------------------|--------------------------|
| Site: AC1                                                    | Time: 2015/05/09 - 02:07 |
| Limit: FCC_Part15.209_RE(3m)                                 | Engineer: Milo Li        |
| Probe: BBHA9120D_1-18GHz                                     | Polarity: Horizontal     |
| EUT: 802.11ac Dual Band Module                               | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT40 at Channel 5755MHz Ant 0 |                          |

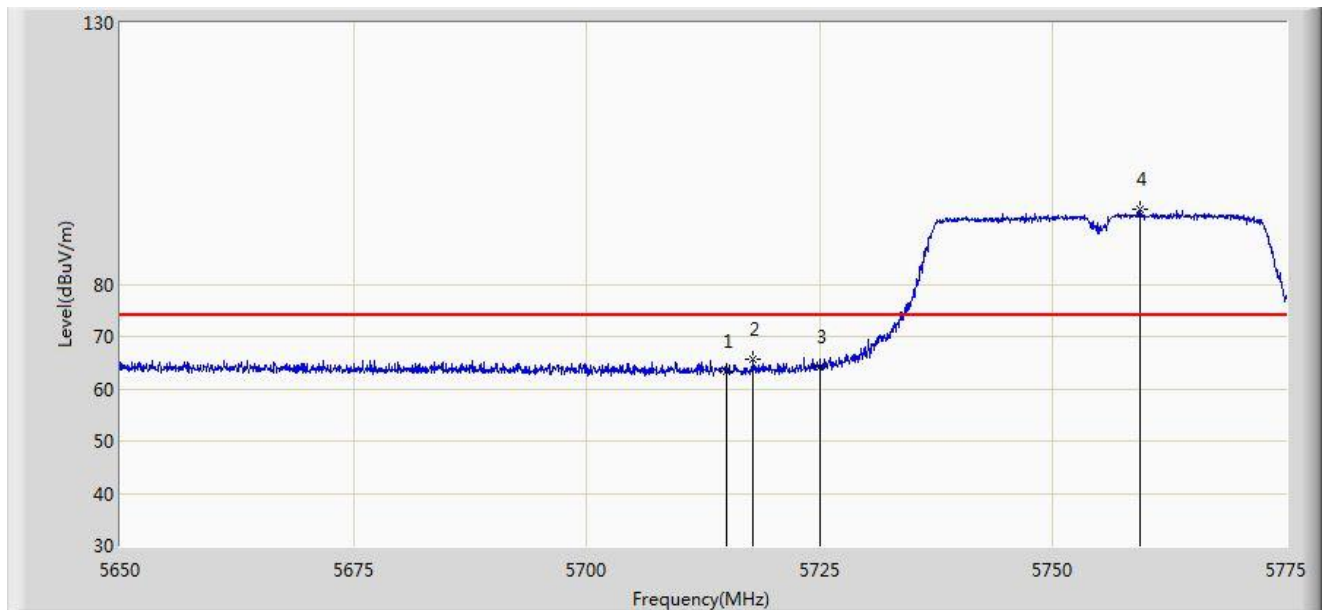


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5715.000        | 63.276                 | 25.327               | -10.724         | 74.000         | 37.949      | PK   |
| 2  |      |      | 5717.812        | 65.681                 | 27.720               | -12.519         | 78.200         | 37.960      | PK   |
| 3  |      |      | 5725.000        | 64.216                 | 26.226               | -13.984         | 78.200         | 37.990      | PK   |
| 4  |      | *    | 5759.312        | 94.362                 | 56.224               | N/A             | N/A            | 38.138      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                              |                          |
|--------------------------------------------------------------|--------------------------|
| Site: AC1                                                    | Time: 2015/05/09 - 02:08 |
| Limit: FCC_Part15.209_RE(3m)                                 | Engineer: Milo Li        |
| Probe: BBHA9120D_1-18GHz                                     | Polarity: Horizontal     |
| EUT: 802.11ac Dual Band Module                               | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT40 at Channel 5755MHz Ant 0 |                          |

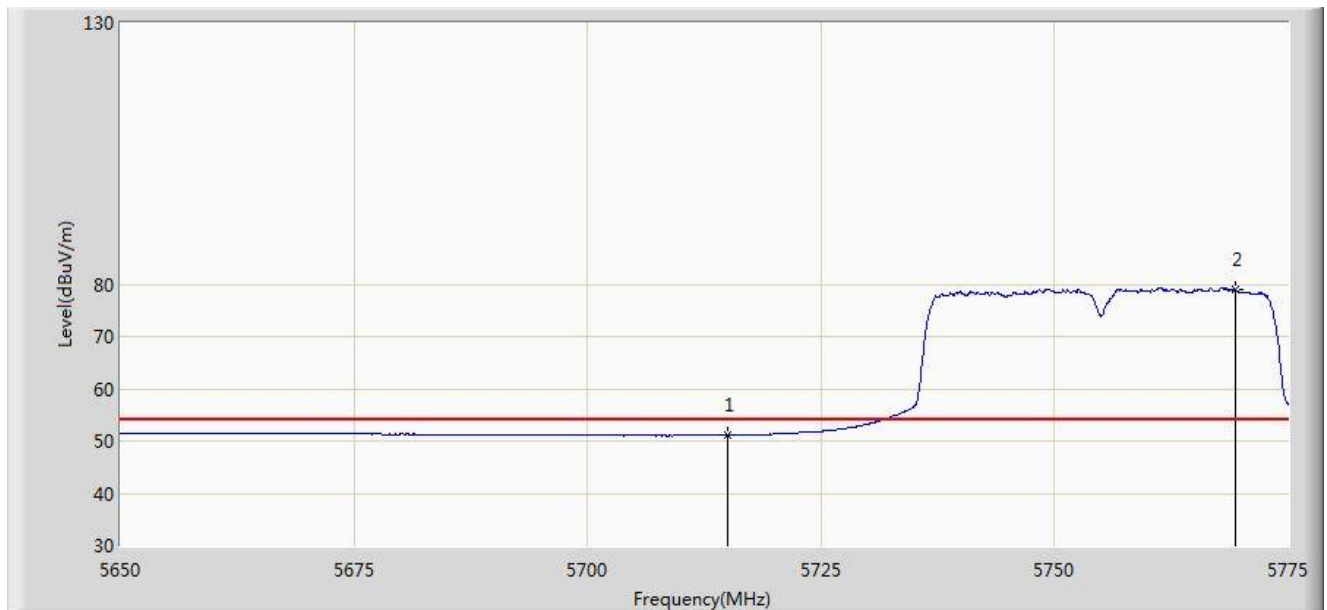

| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5715.000        | 51.107                 | 13.158               | -2.893          | 54.000         | 37.949      | AV   |
| 2  |      | *    | 5769.312        | 78.987                 | 40.823               | N/A             | N/A            | 38.164      | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)