


Site: AC1	Time: 2018/03/22 - 04:37
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: 802.11ac Dual Band Module	Power: DC 3.3V
Test Mode: Transmit by 802.11n-HT40 at Channel 2422MHz, Ant 1	

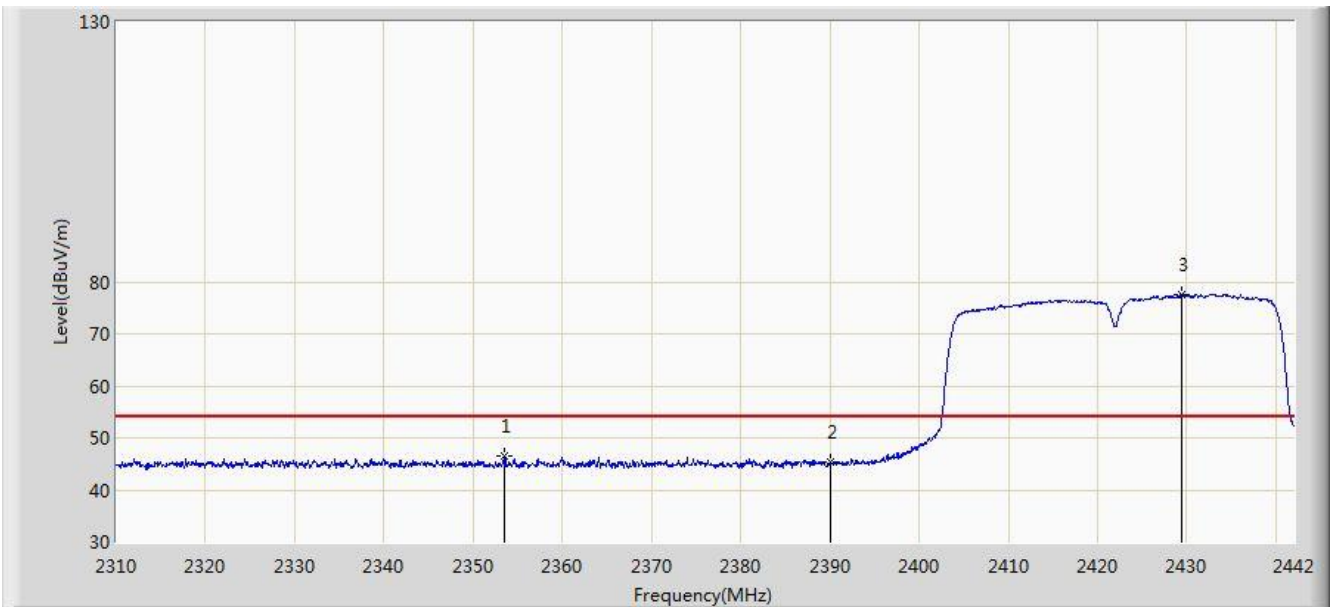


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2353.560	46.458	14.067	-7.542	54.000	32.391	AV
2			2390.000	45.437	13.110	-8.563	54.000	32.327	AV
3		*	2429.460	77.632	45.356	N/A	N/A	32.275	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/03/22 - 04:34
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: 802.11ac Dual Band Module	Power: DC 3.3V
Test Mode: Transmit by 802.11n-HT40 at Channel 2422MHz, Ant 1	

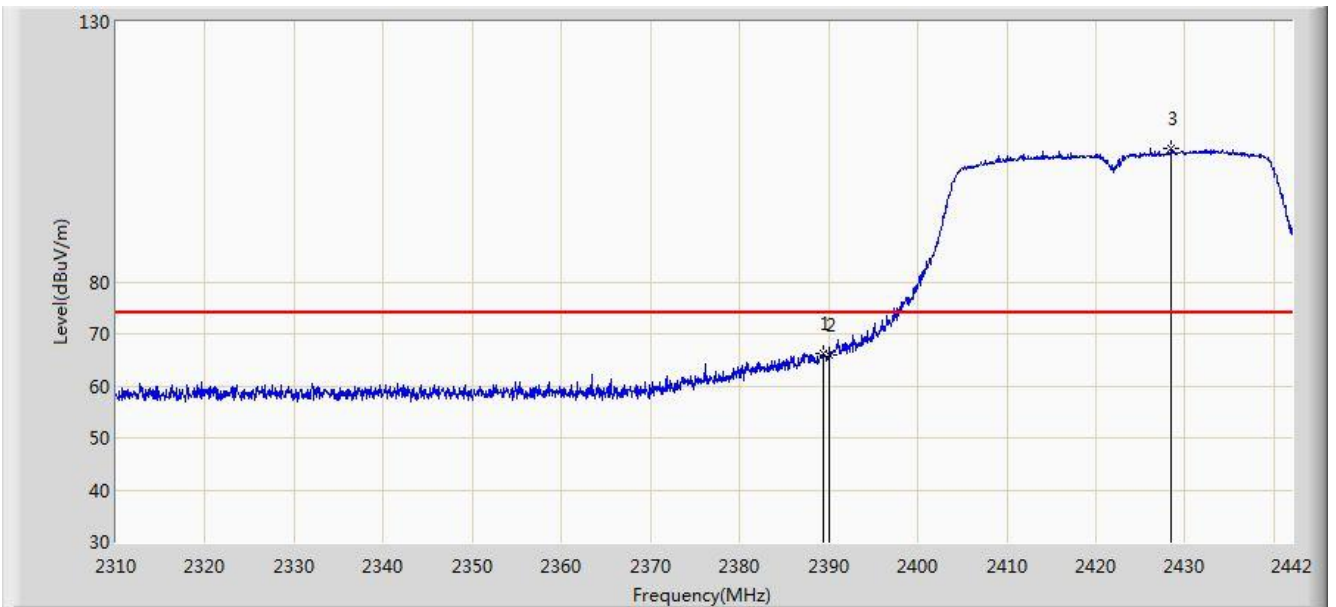


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.398	66.337	34.009	-7.663	74.000	32.327	PK
2			2390.000	65.912	33.585	-8.088	74.000	32.327	PK
3		*	2428.470	105.660	73.383	N/A	N/A	32.277	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/03/22 - 04:33
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: 802.11ac Dual Band Module	Power: DC 3.3V
Test Mode: Transmit by 802.11n-HT40 at Channel 2422MHz, Ant 1	

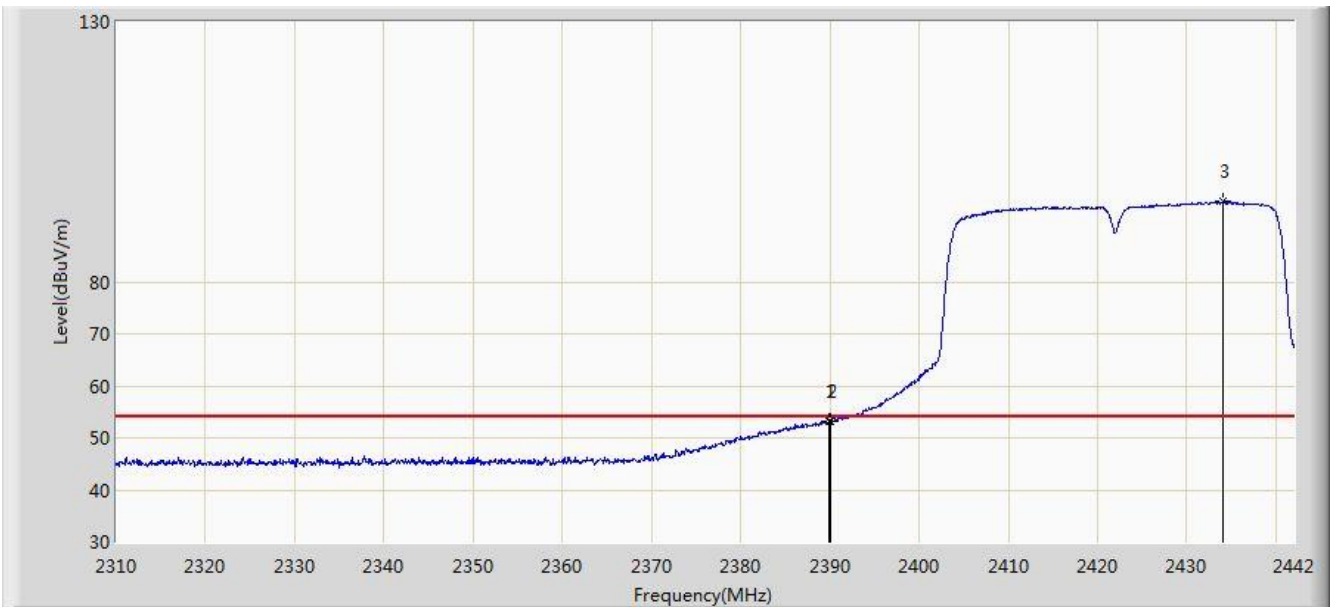


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.860	53.134	20.807	-0.866	54.000	32.327	AV
2			2390.000	53.140	20.813	-0.860	54.000	32.327	AV
3		*	2434.080	95.418	63.150	N/A	N/A	32.268	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/03/27 - 05:58
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: 802.11ac Dual Band Module	Power: DC 3.3V
Test Mode: Transmit by 802.11n-HT40 at Channel 2437MHz, Ant 1	

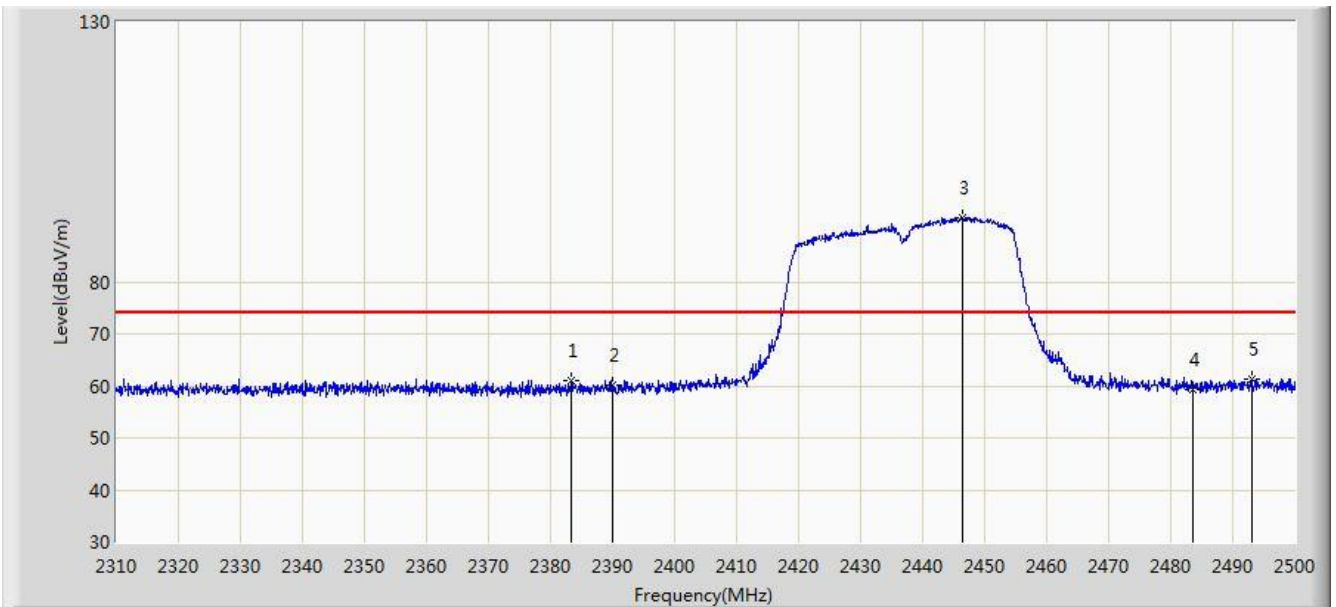


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2383.340	61.000	28.664	-13.000	74.000	32.336	PK
2			2390.000	60.081	27.754	-13.919	74.000	32.327	PK
3		*	2446.515	92.278	60.029	N/A	N/A	32.249	PK
4			2483.500	59.167	26.828	-14.833	74.000	32.340	PK
5			2493.065	61.443	29.066	-12.557	74.000	32.377	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/03/27 - 06:01
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: 802.11ac Dual Band Module	Power: DC 3.3V
Test Mode: Transmit by 802.11n-HT40 at Channel 2437MHz, Ant 1	

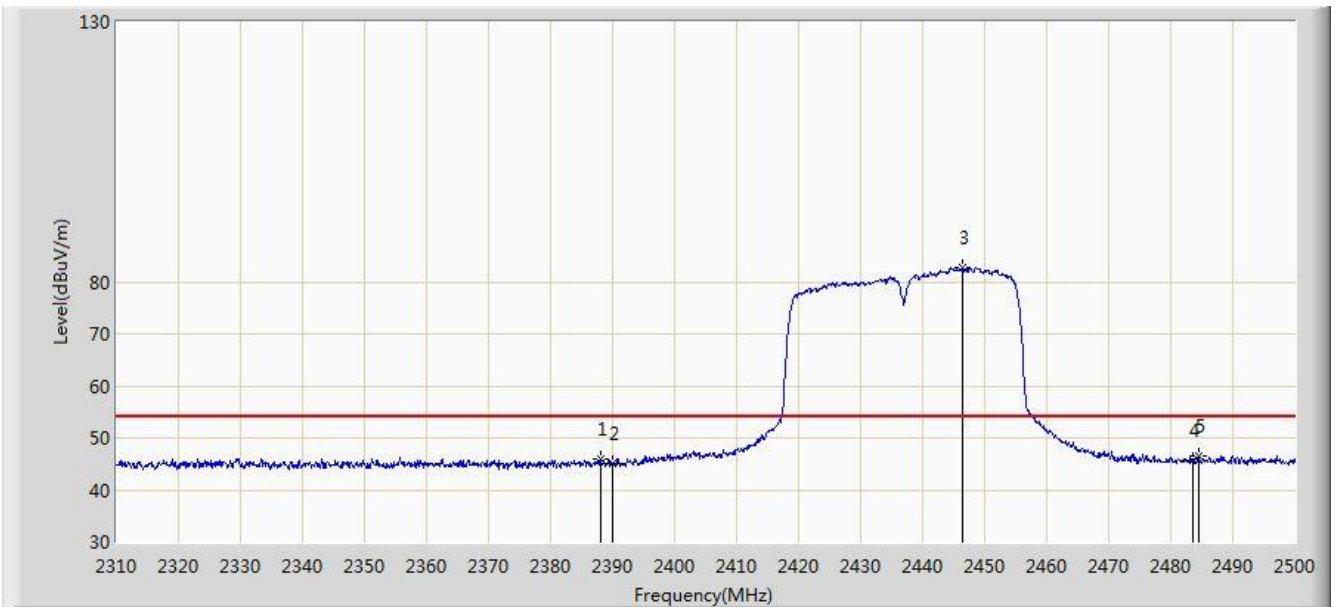


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2388.185	45.952	13.623	-8.048	54.000	32.330	AV
2			2390.000	45.180	12.853	-8.820	54.000	32.327	AV
3		*	2446.420	82.787	50.538	N/A	N/A	32.249	AV
4			2483.500	45.788	13.449	-8.212	54.000	32.340	AV
5			2484.515	46.649	14.306	-7.351	54.000	32.343	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/03/27 - 05:57
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: 802.11ac Dual Band Module	Power: DC 3.3V
Test Mode: Transmit by 802.11n-HT40 at Channel 2437MHz, Ant 1	

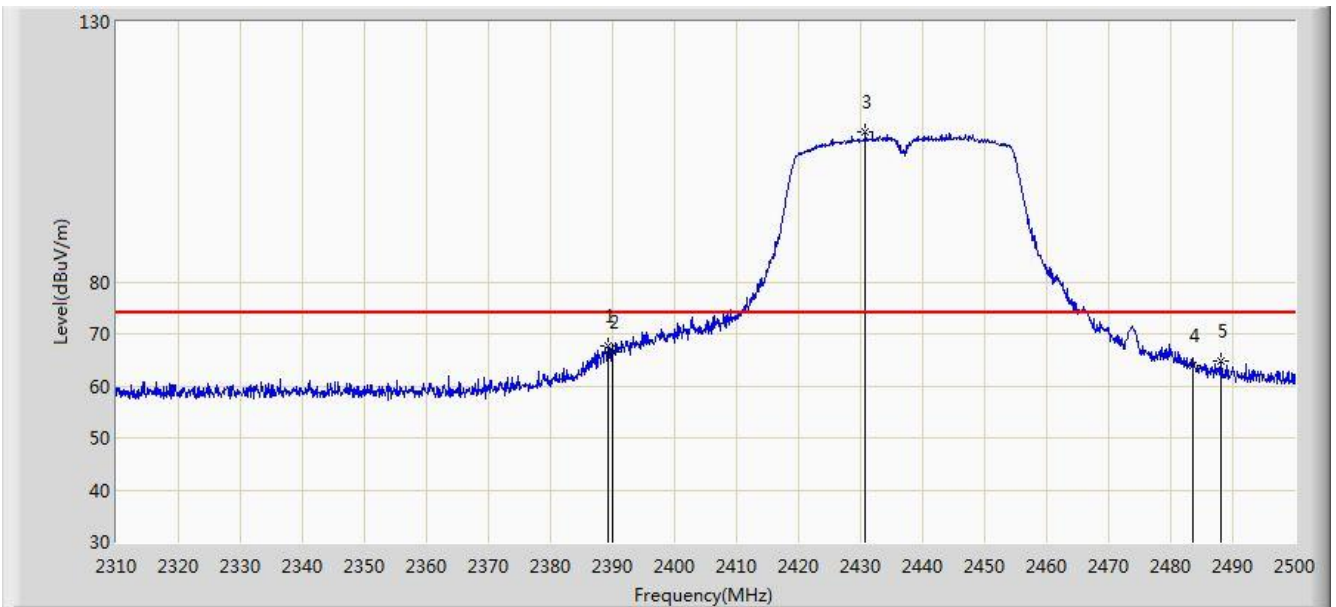


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.230	67.785	35.457	-6.215	74.000	32.328	PK
2			2390.000	66.427	34.100	-7.573	74.000	32.327	PK
3		*	2430.745	108.823	76.550	N/A	N/A	32.273	PK
4			2483.500	63.959	31.620	-10.041	74.000	32.340	PK
5			2488.030	64.743	32.386	-9.257	74.000	32.357	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/03/27 - 05:56
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: 802.11ac Dual Band Module	Power: DC 3.3V
Test Mode: Transmit by 802.11n-HT40 at Channel 2437MHz, Ant 1	

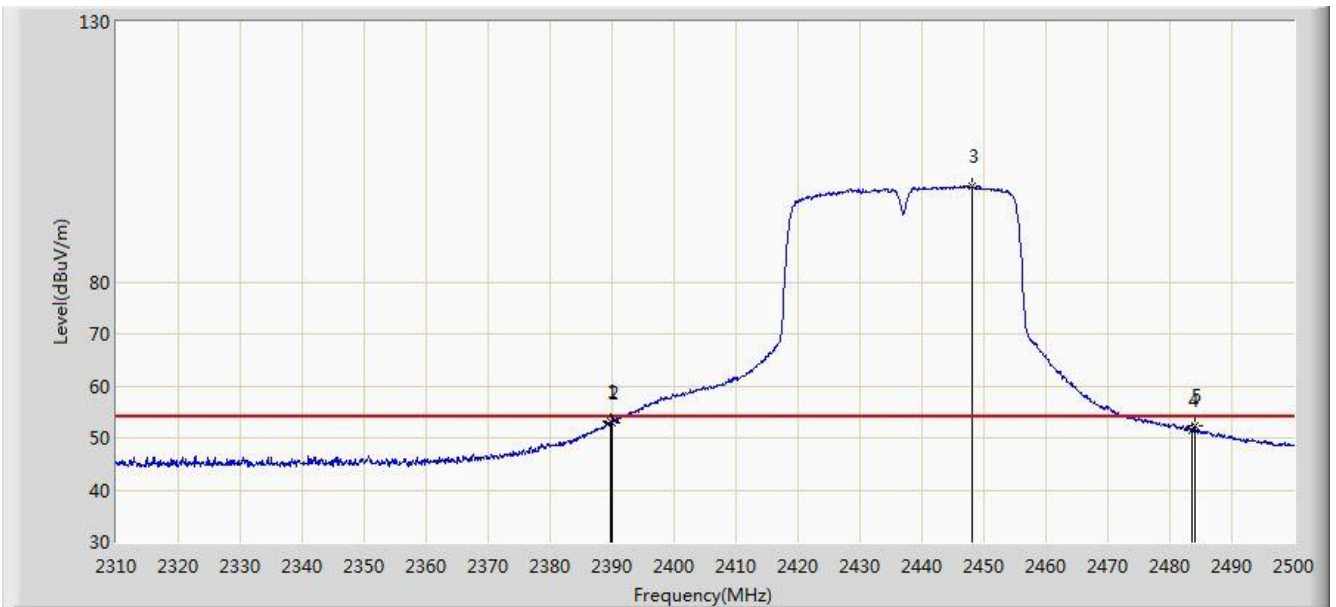


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.800	53.191	20.864	-0.809	54.000	32.327	AV
2			2390.000	52.920	20.593	-1.080	54.000	32.327	AV
3		*	2448.035	98.428	66.176	N/A	N/A	32.252	AV
4			2483.500	51.423	19.084	-2.577	54.000	32.340	AV
5			2483.945	52.310	19.969	-1.690	54.000	32.340	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/03/22 - 04:44
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: 802.11ac Dual Band Module	Power: DC 3.3V
Test Mode: Transmit by 802.11n-HT40 at Channel 2452MHz, Ant 1	

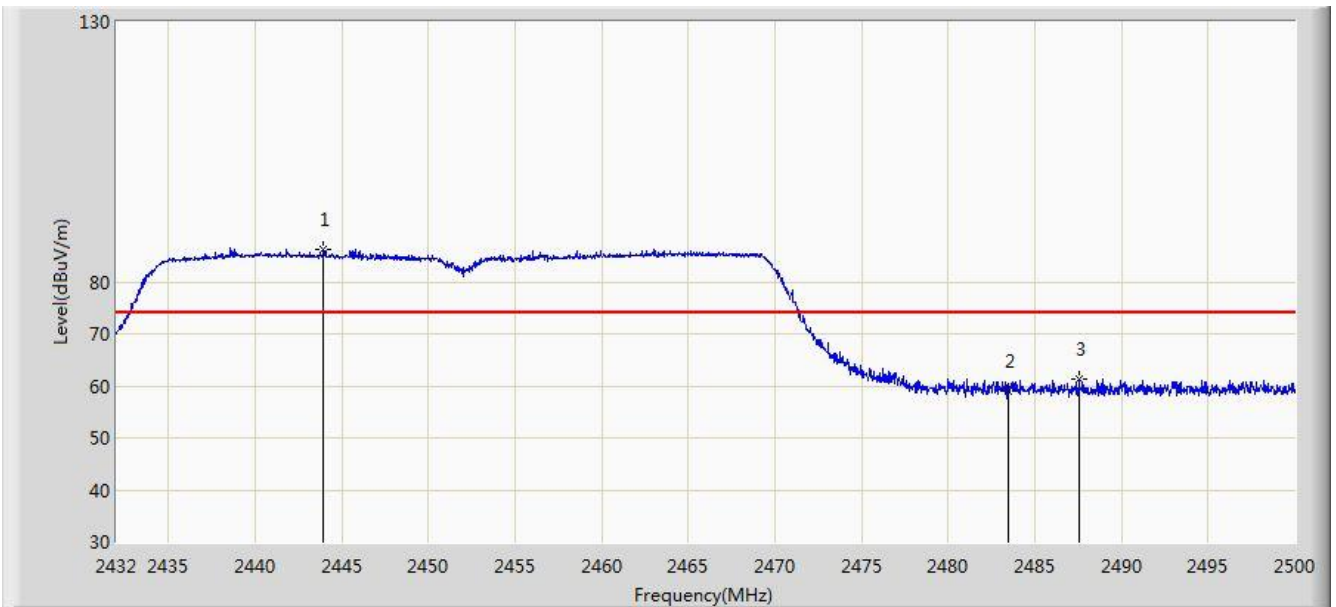


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2443.968	86.344	54.093	N/A	N/A	32.251	PK
2			2483.500	59.068	26.729	-14.932	74.000	32.340	PK
3			2487.522	61.319	28.964	-12.681	74.000	32.355	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/03/22 - 04:45
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: 802.11ac Dual Band Module	Power: DC 3.3V
Test Mode: Transmit by 802.11n-HT40 at Channel 2452MHz, Ant 1	

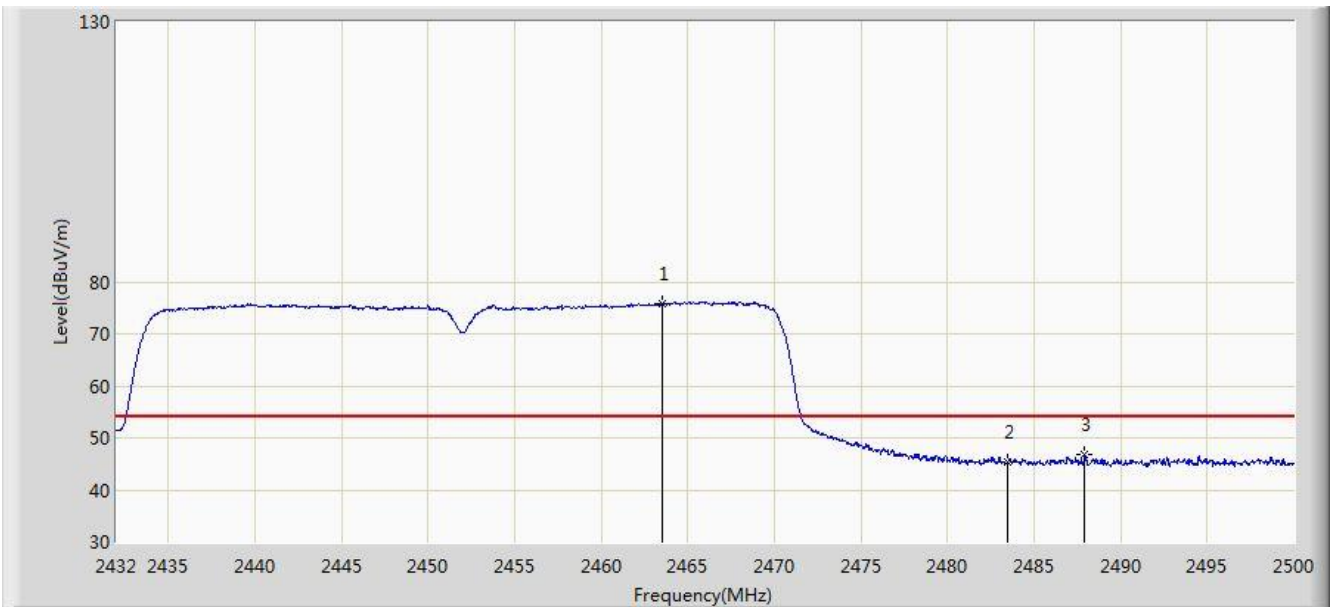


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2463.552	75.890	43.607	N/A	N/A	32.283	AV
2			2483.500	45.296	12.957	-8.704	54.000	32.340	AV
3			2487.930	46.826	14.469	-7.174	54.000	32.357	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/03/22 - 04:43
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: 802.11ac Dual Band Module	Power: DC 3.3V
Test Mode: Transmit by 802.11n-HT40 at Channel 2452MHz, Ant 1	

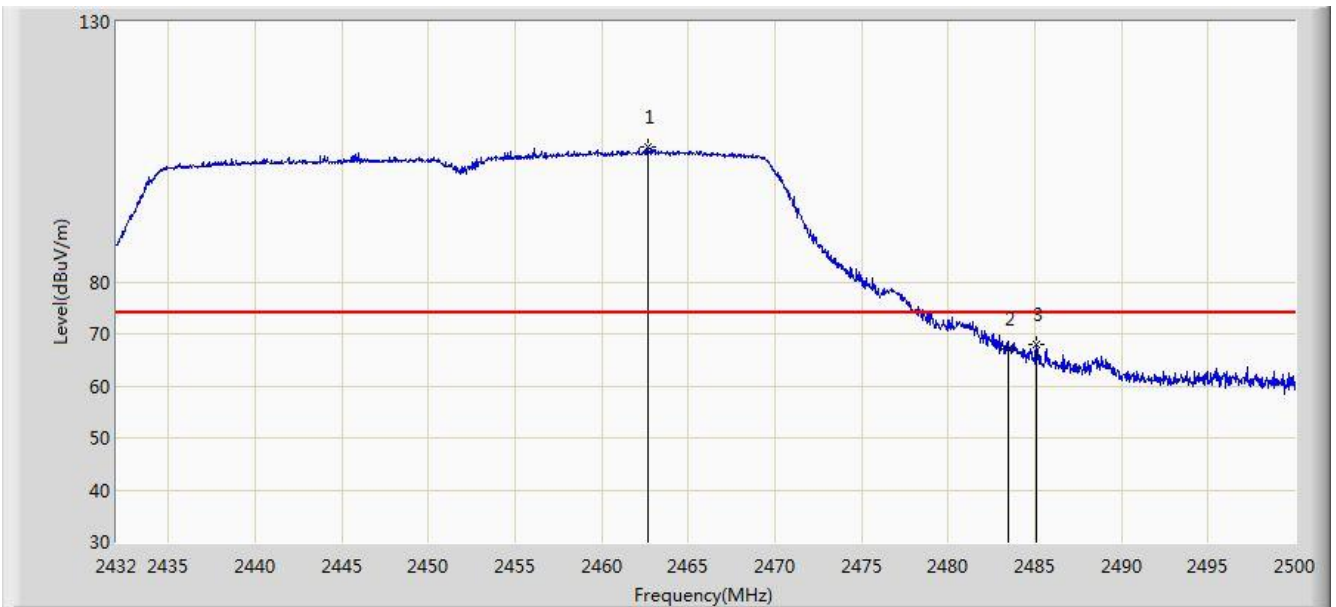


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2462.702	106.010	73.728	N/A	N/A	32.281	PK
2			2483.500	67.090	34.751	-6.910	74.000	32.340	PK
3			2485.108	68.049	35.704	-5.951	74.000	32.346	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/03/22 - 04:41
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: 802.11ac Dual Band Module	Power: DC 3.3V
Test Mode: Transmit by 802.11n-HT40 at Channel 2452MHz, Ant 1	

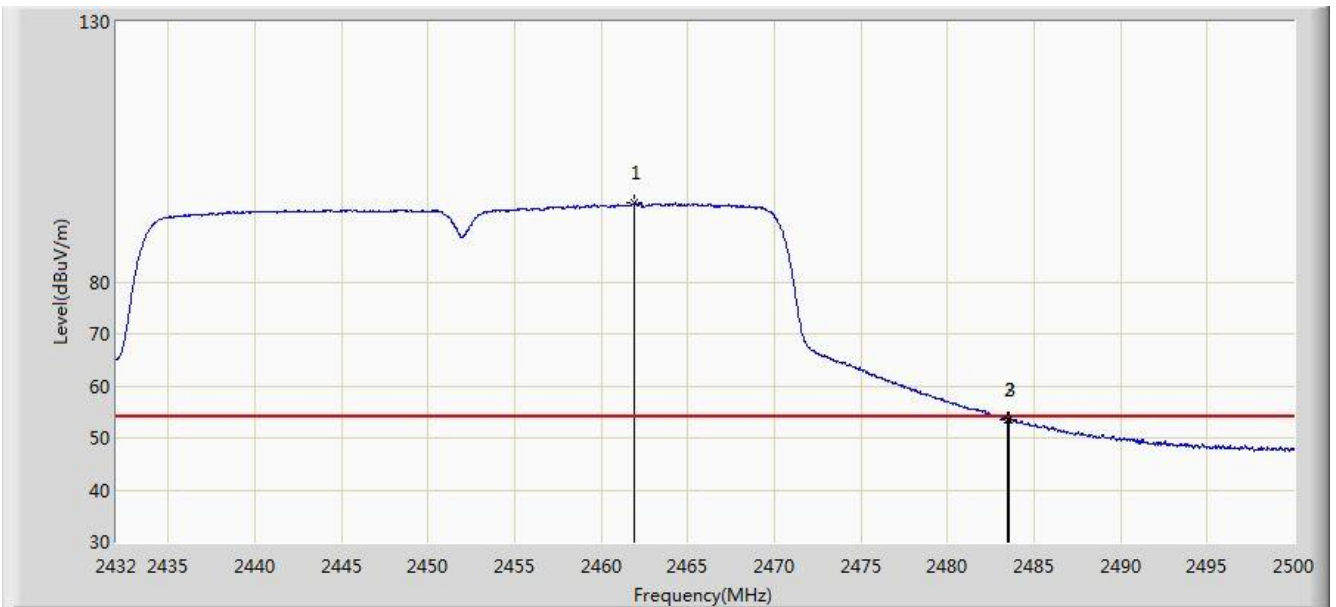


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2461.920	95.117	62.837	N/A	N/A	32.280	AV
2			2483.500	53.453	21.114	-0.547	54.000	32.340	AV
3			2483.578	53.518	21.179	-0.482	54.000	32.340	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/03/22 - 04:52
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: 802.11ac Dual Band Module	Power: DC 3.3V
Test Mode: Transmit by 802.11b at Channel 2412MHz, Ant 2	

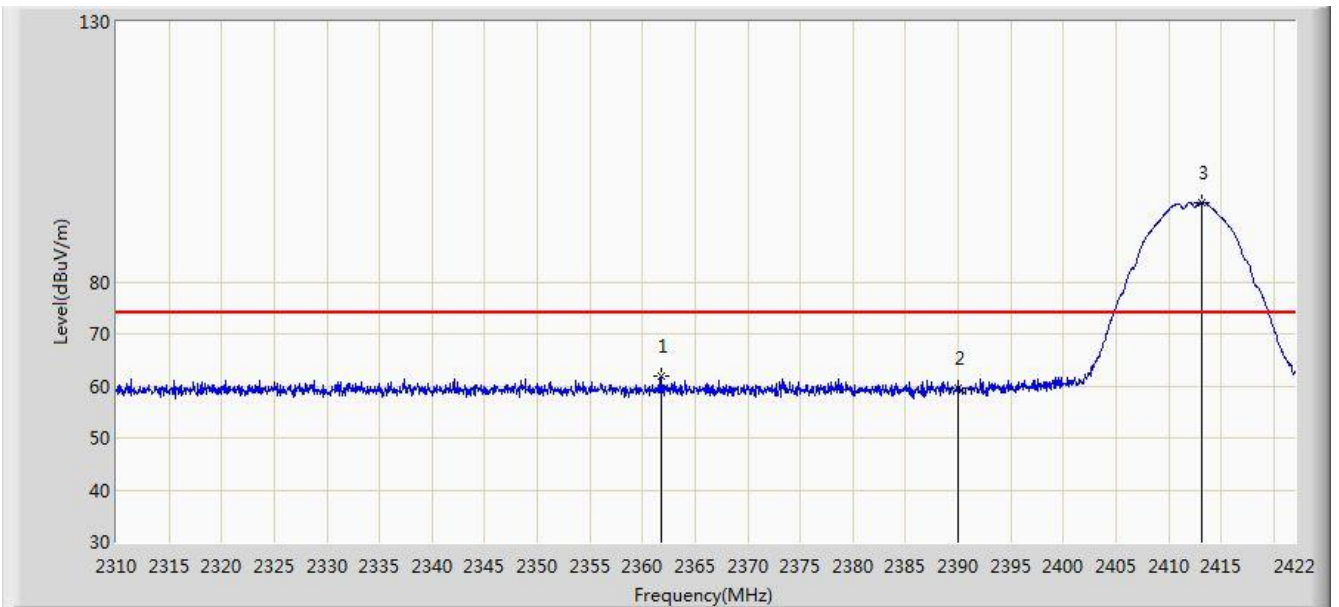


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2361.856	61.889	29.516	-12.111	74.000	32.373	PK
2			2390.000	59.662	27.335	-14.338	74.000	32.327	PK
3		*	2413.096	95.359	63.075	N/A	N/A	32.284	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/03/22 - 04:54
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: 802.11ac Dual Band Module	Power: DC 3.3V
Test Mode: Transmit by 802.11b at Channel 2412MHz, Ant 2	

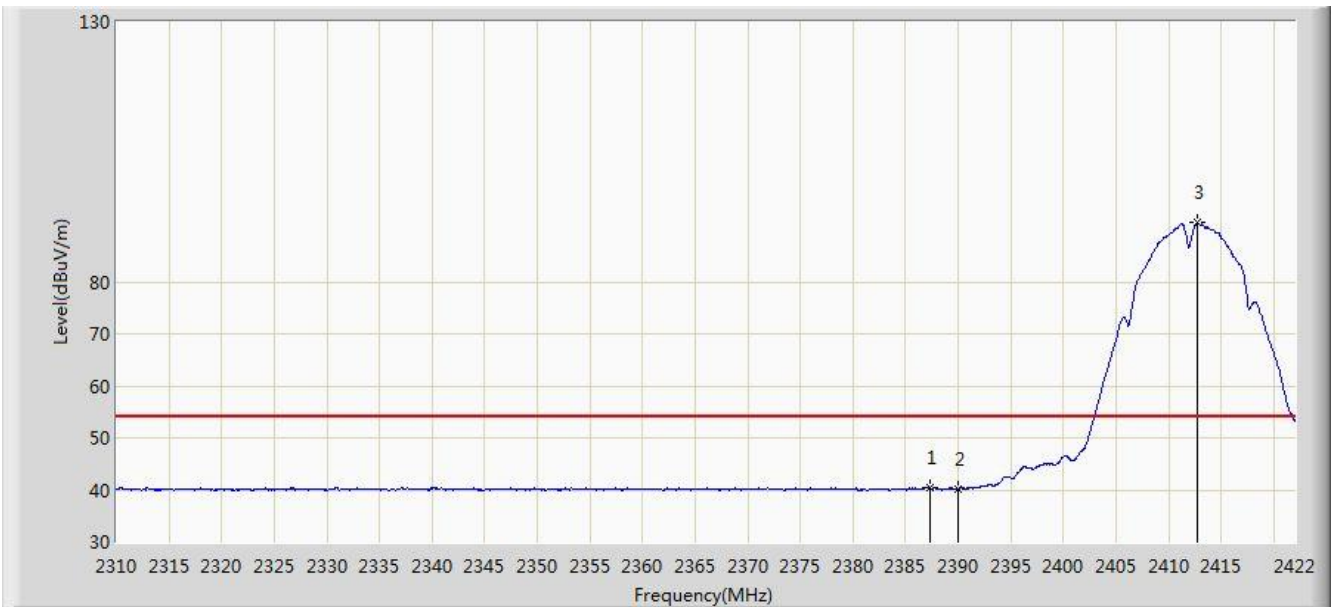


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2387.280	40.440	8.109	-13.560	54.000	32.331	AV
2			2390.000	40.167	7.840	-13.833	54.000	32.327	AV
3		*	2412.760	91.337	59.052	N/A	N/A	32.284	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/03/22 - 04:47
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: 802.11ac Dual Band Module	Power: DC 3.3V
Test Mode: Transmit by 802.11b at Channel 2412MHz, Ant 2	

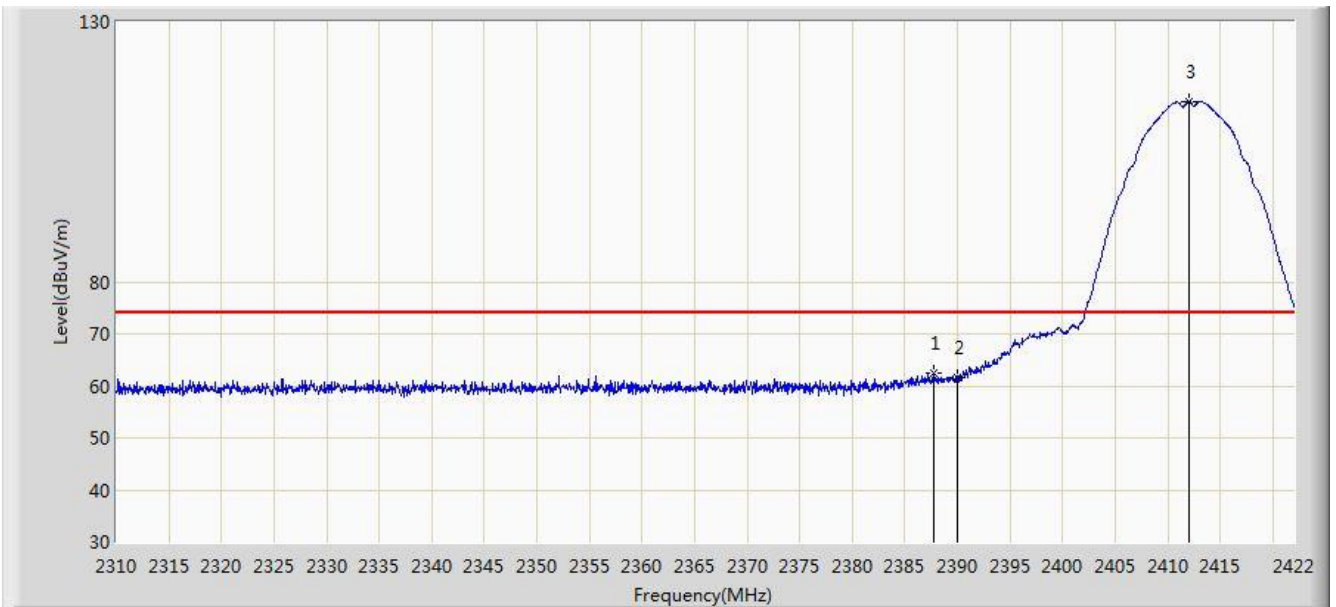


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2387.728	62.350	30.020	-11.650	74.000	32.330	PK
2			2390.000	61.589	29.262	-12.411	74.000	32.327	PK
3		*	2412.032	114.673	82.388	N/A	N/A	32.285	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/03/22 - 04:51
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: 802.11ac Dual Band Module	Power: DC 3.3V
Test Mode: Transmit by 802.11b at Channel 2412MHz, Ant 2	

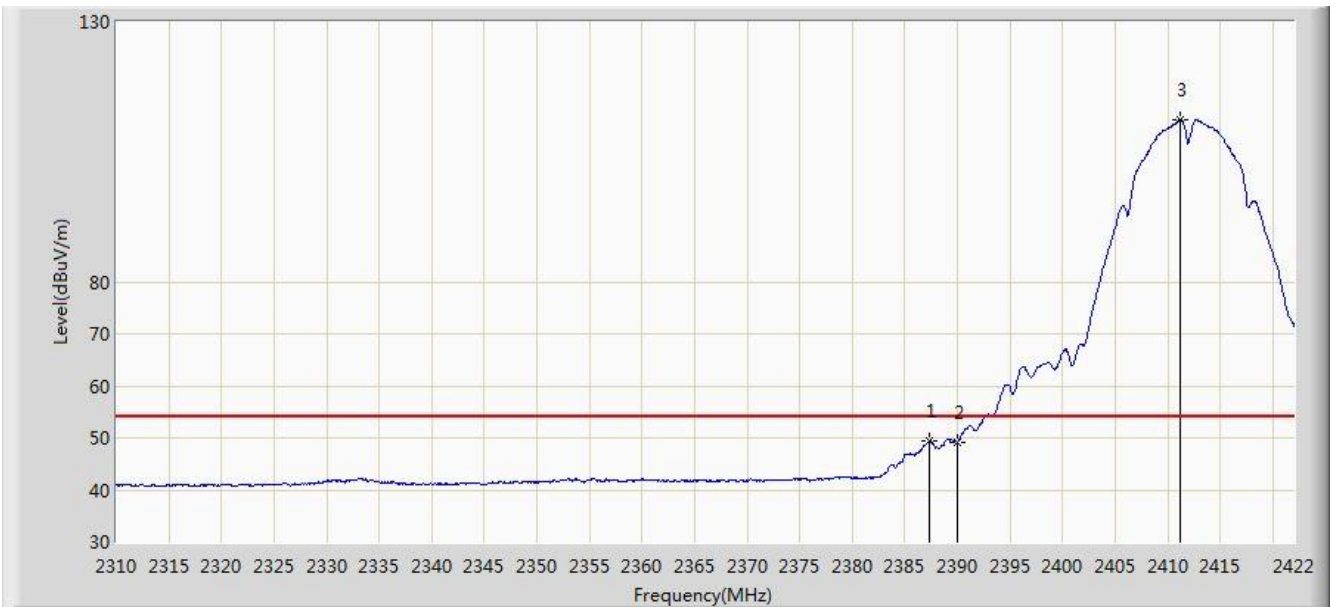


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2387.336	49.459	17.129	-4.541	54.000	32.331	AV
2			2390.000	49.069	16.742	-4.931	54.000	32.327	AV
3		*	2411.136	111.248	78.963	N/A	N/A	32.285	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/03/22 - 04:59
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: 802.11ac Dual Band Module	Power: DC 3.3V
Test Mode: Transmit by 802.11b at Channel 2462MHz, Ant 2	

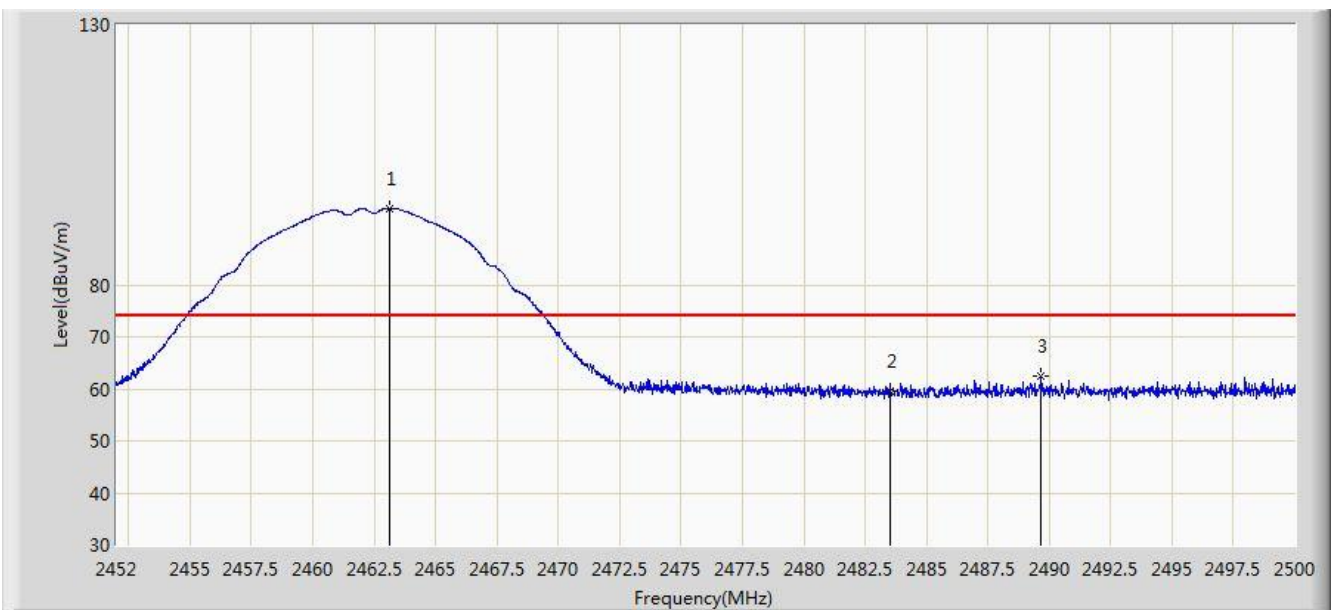

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2463.112	94.738	62.456	N/A	N/A	32.282	PK
2			2483.500	59.565	27.226	-14.435	74.000	32.340	PK
3			2489.680	62.410	30.047	-11.590	74.000	32.364	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/03/22 - 05:01
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: 802.11ac Dual Band Module	Power: DC 3.3V
Test Mode: Transmit by 802.11b at Channel 2462MHz, Ant 2	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2461.168	90.793	58.514	N/A	N/A	32.279	AV
2			2482.500	40.372	8.037	-13.628	54.000	32.335	AV
3			2483.440	40.595	8.256	-13.405	54.000	32.339	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/03/22 - 04:56
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: 802.11ac Dual Band Module	Power: DC 3.3V
Test Mode: Transmit by 802.11b at Channel 2462MHz, Ant 2	

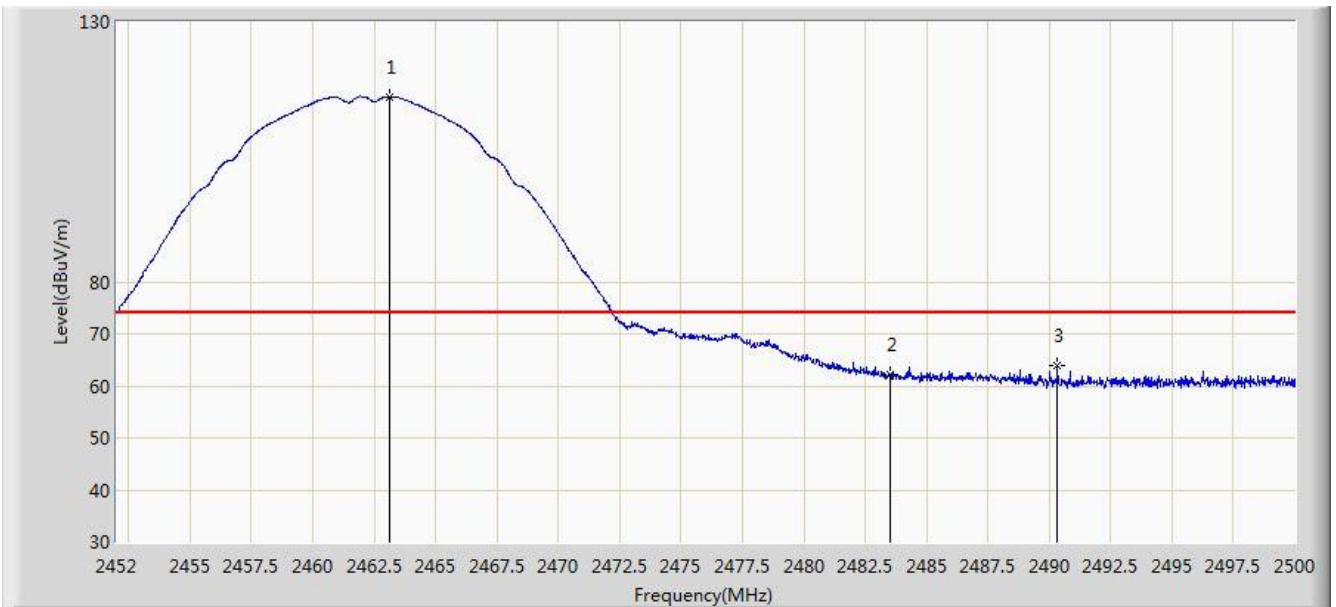

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2463.112	115.651	83.369	N/A	N/A	32.282	PK
2			2483.500	62.175	29.836	-11.825	74.000	32.340	PK
3			2490.328	63.846	31.480	-10.154	74.000	32.366	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/03/22 - 04:58
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: 802.11ac Dual Band Module	Power: DC 3.3V
Test Mode: Transmit by 802.11b at Channel 2462MHz, Ant 2	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2462.704	112.060	79.778	N/A	N/A	32.281	AV
2			2483.500	49.728	17.389	-4.272	54.000	32.340	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/03/22 - 05:10
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: 802.11ac Dual Band Module	Power: DC 3.3V
Test Mode: Transmit by 802.11g at Channel 2412MHz, Ant 2	

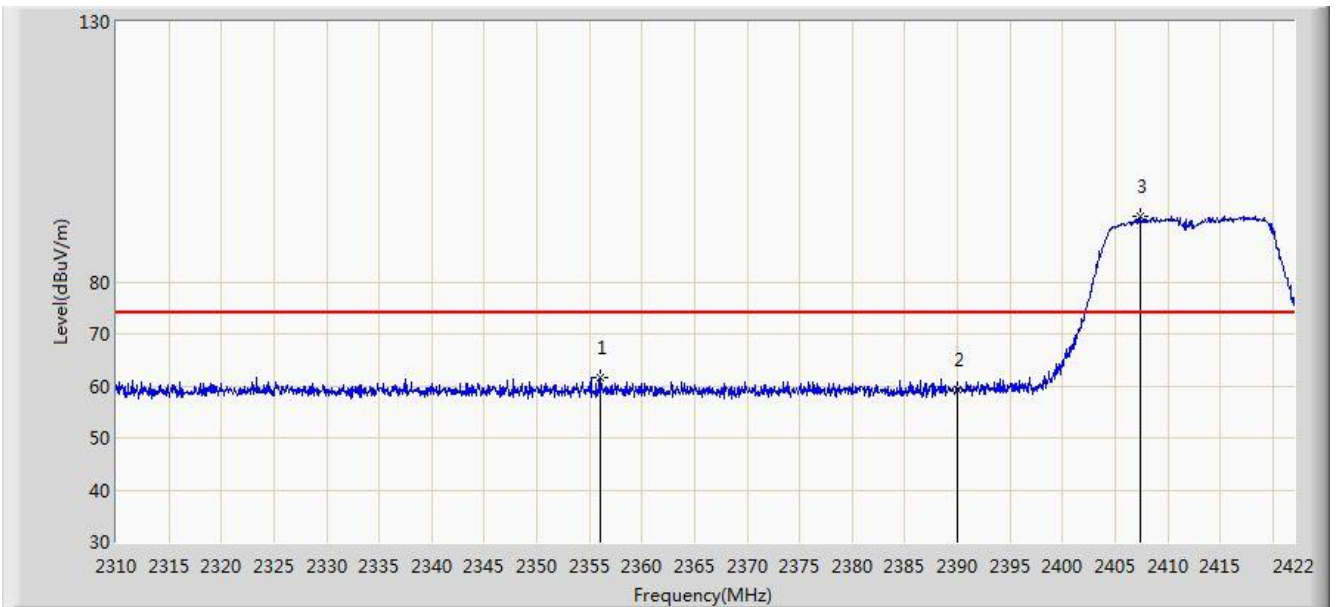


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2356.088	61.570	29.186	-12.430	74.000	32.383	PK
2			2390.000	59.276	26.949	-14.724	74.000	32.327	PK
3		*	2407.384	92.635	60.342	N/A	N/A	32.293	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/03/22 - 05:12
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: 802.11ac Dual Band Module	Power: DC 3.3V
Test Mode: Transmit by 802.11g at Channel 2412MHz, Ant 2	

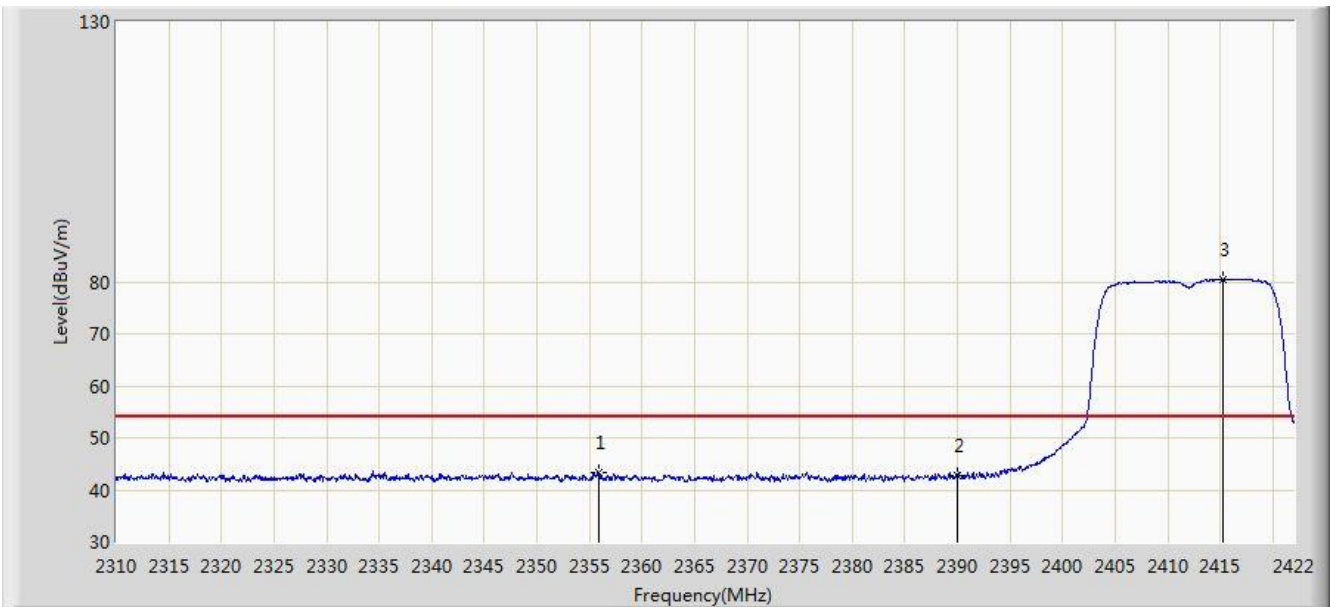


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2355.864	43.468	11.084	-10.532	54.000	32.384	AV
2			2390.000	42.807	10.480	-11.193	54.000	32.327	AV
3		*	2415.280	80.503	48.220	N/A	N/A	32.283	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/03/22 - 05:10
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: 802.11ac Dual Band Module	Power: DC 3.3V
Test Mode: Transmit by 802.11g at Channel 2412MHz, Ant 2	

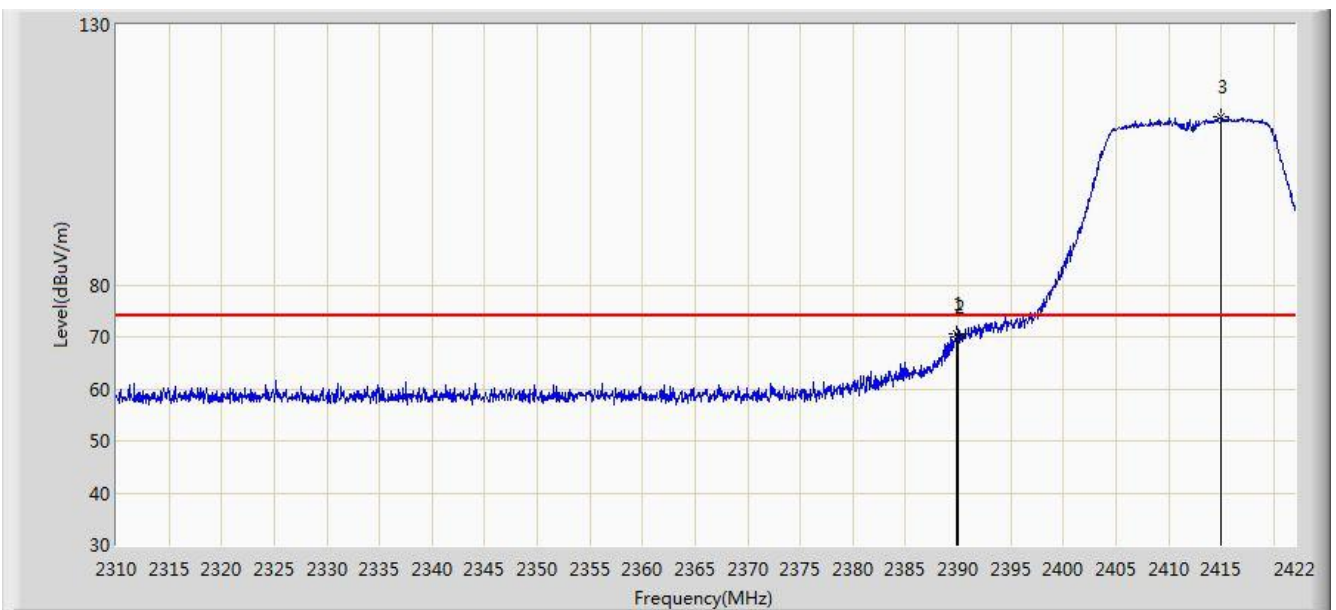


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.856	70.471	38.144	-3.529	74.000	32.327	PK
2			2390.000	70.030	37.703	-3.970	74.000	32.327	PK
3		*	2415.000	112.308	80.024	N/A	N/A	32.284	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/03/22 - 05:08
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: 802.11ac Dual Band Module	Power: DC 3.3V
Test Mode: Transmit by 802.11g at Channel 2412MHz, Ant 2	

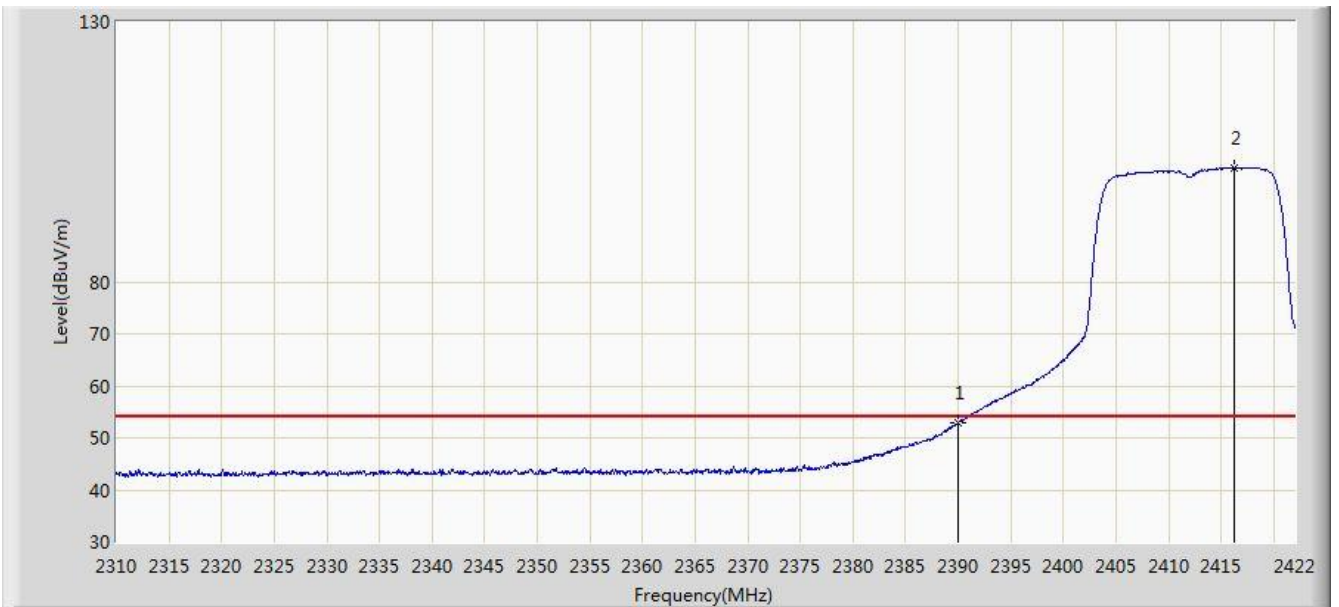


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	52.855	20.528	-1.145	54.000	32.327	AV
2		*	2416.288	102.006	69.723	N/A	N/A	32.283	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/04/18 - 17:58
Limit: FCC_Part15.209_RE(3m)	Engineer: Alex Ma
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: 802.11ac Dual Band Module	Power: DC 3.3V
Test Mode: Transmit by 802.11g at Channel 2437MHz, Ant 2	

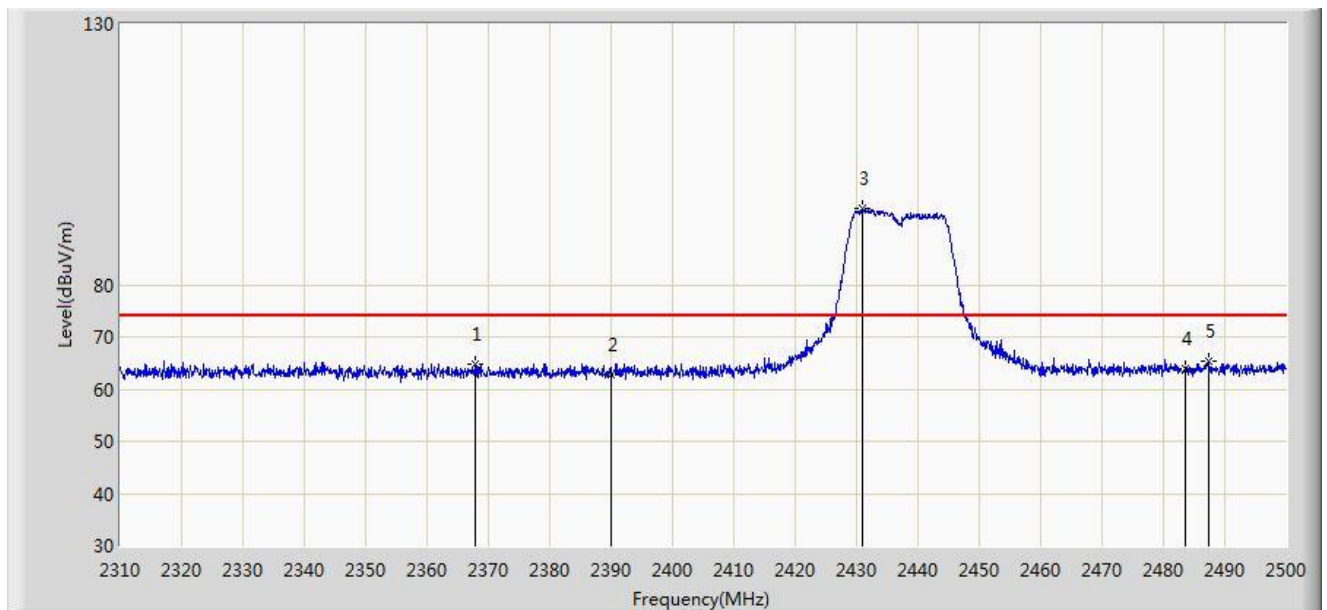


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2367.855	64.715	32.353	-9.285	74.000	32.362	PK
2			2390.000	62.888	30.561	-11.112	74.000	32.327	PK
3			2431.030	94.622	62.349	N/A	N/A	32.273	PK
4			2483.500	64.053	31.714	-9.947	74.000	32.340	PK
5			2487.270	65.323	32.969	-8.677	74.000	32.354	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/04/18 - 18:00
Limit: FCC_Part15.209_RE(3m)	Engineer: Alex Ma
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: 802.11ac Dual Band Module	Power: DC 3.3V
Test Mode: Transmit by 802.11g at Channel 2437MHz, Ant 2	

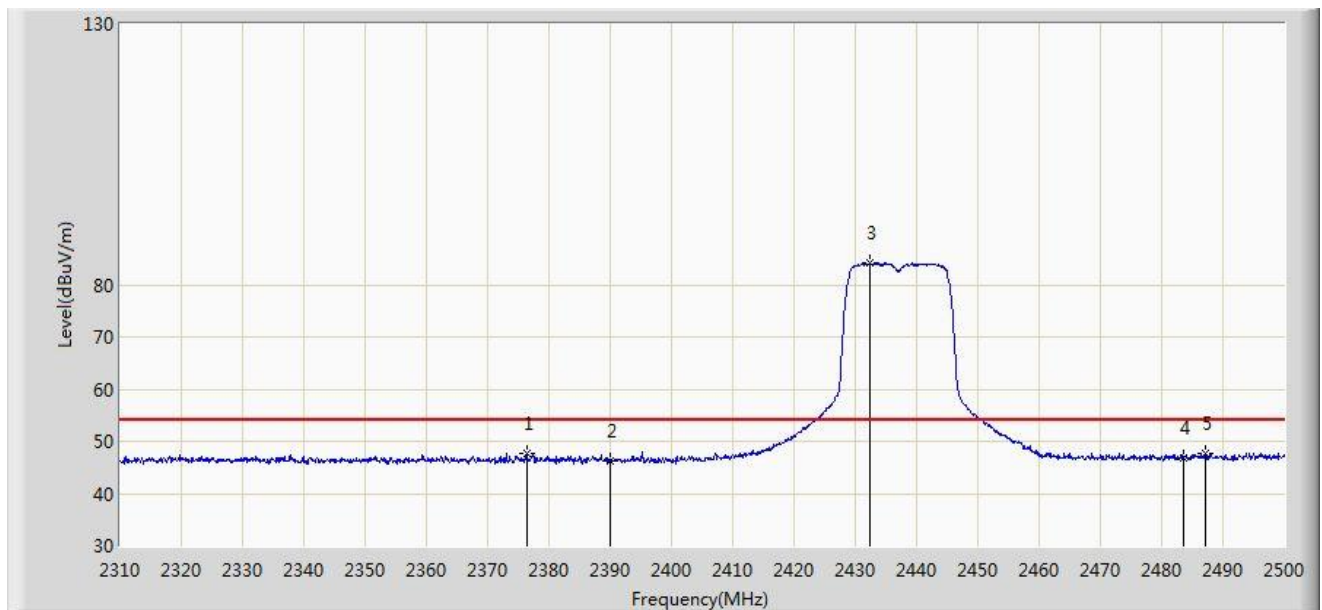


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2376.310	47.716	15.370	-6.284	54.000	32.346	AV
2			2390.000	46.343	14.016	-7.657	54.000	32.327	AV
3			2432.265	84.133	51.862	N/A	N/A	32.271	AV
4			2483.500	46.939	14.600	-7.061	54.000	32.340	AV
5			2487.175	47.625	15.271	-6.375	54.000	32.353	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/04/18 - 17:54
Limit: FCC_Part15.209_RE(3m)	Engineer: Alex Ma
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: 802.11ac Dual Band Module	Power: DC 3.3V
Test Mode: Transmit by 802.11g at Channel 2437MHz, Ant 2	

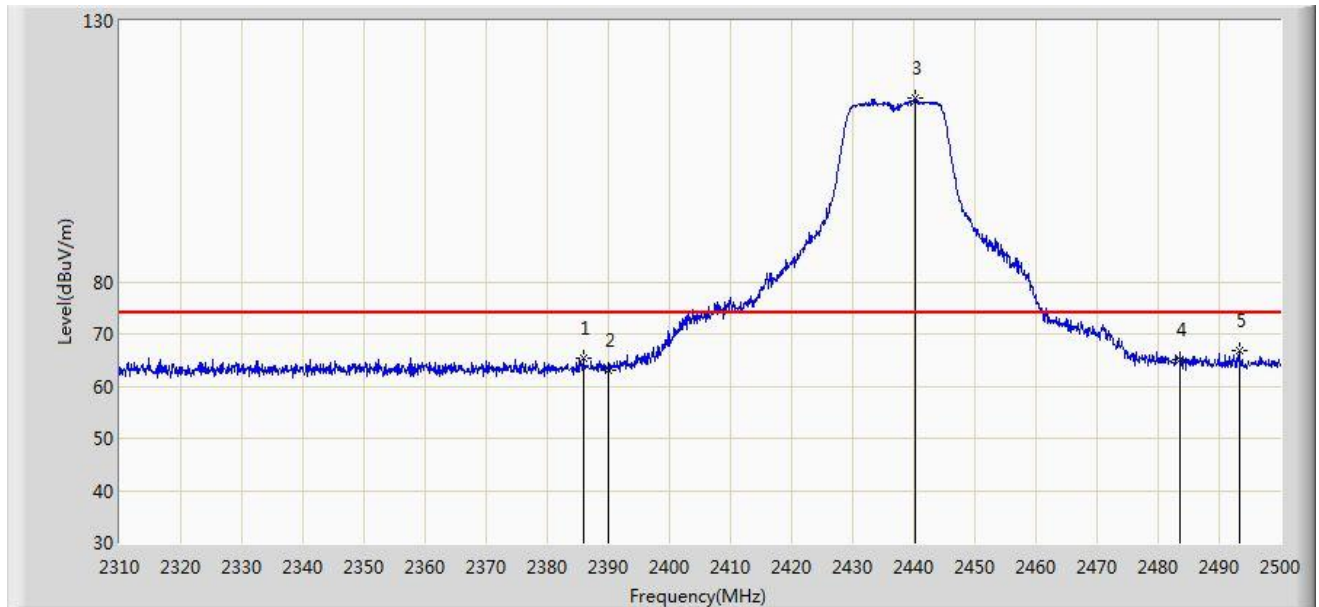


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2385.905	65.463	33.131	-8.537	74.000	32.332	PK
2			2390.000	63.009	30.682	-10.991	74.000	32.327	PK
3			2440.245	115.077	82.819	N/A	N/A	32.257	PK
4			2483.500	64.998	32.659	-9.002	74.000	32.340	PK
5			2493.350	66.881	34.503	-7.119	74.000	32.377	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/04/18 - 17:57
Limit: FCC_Part15.209_RE(3m)	Engineer: Alex Ma
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: 802.11ac Dual Band Module	Power: DC 3.3V
Test Mode: Transmit by 802.11g at Channel 2437MHz, Ant 2	

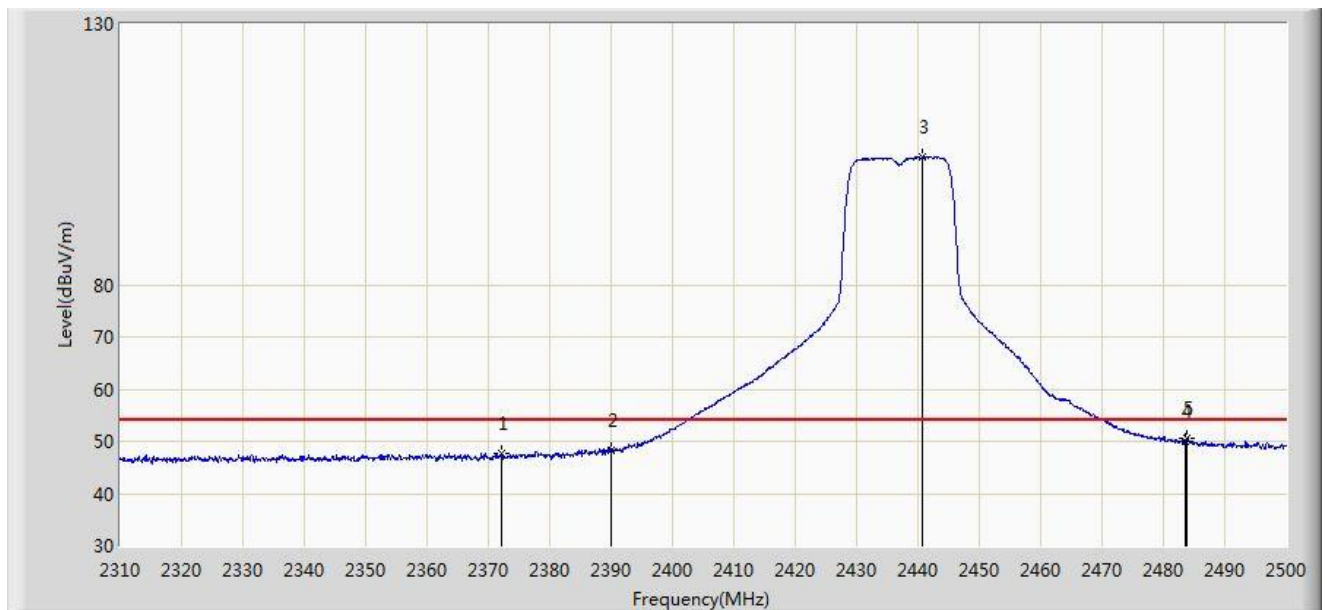


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2372.130	47.696	15.342	-6.304	54.000	32.354	AV
2			2390.000	48.148	15.821	-5.852	54.000	32.327	AV
3			2440.815	104.451	72.194	N/A	N/A	32.257	AV
4			2483.500	49.964	17.625	-4.036	54.000	32.340	AV
5			2483.755	50.455	18.115	-3.545	54.000	32.340	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/03/22 - 05:19
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: 802.11ac Dual Band Module	Power: DC 3.3V
Test Mode: Transmit by 802.11g at Channel 2462MHz, Ant 2	

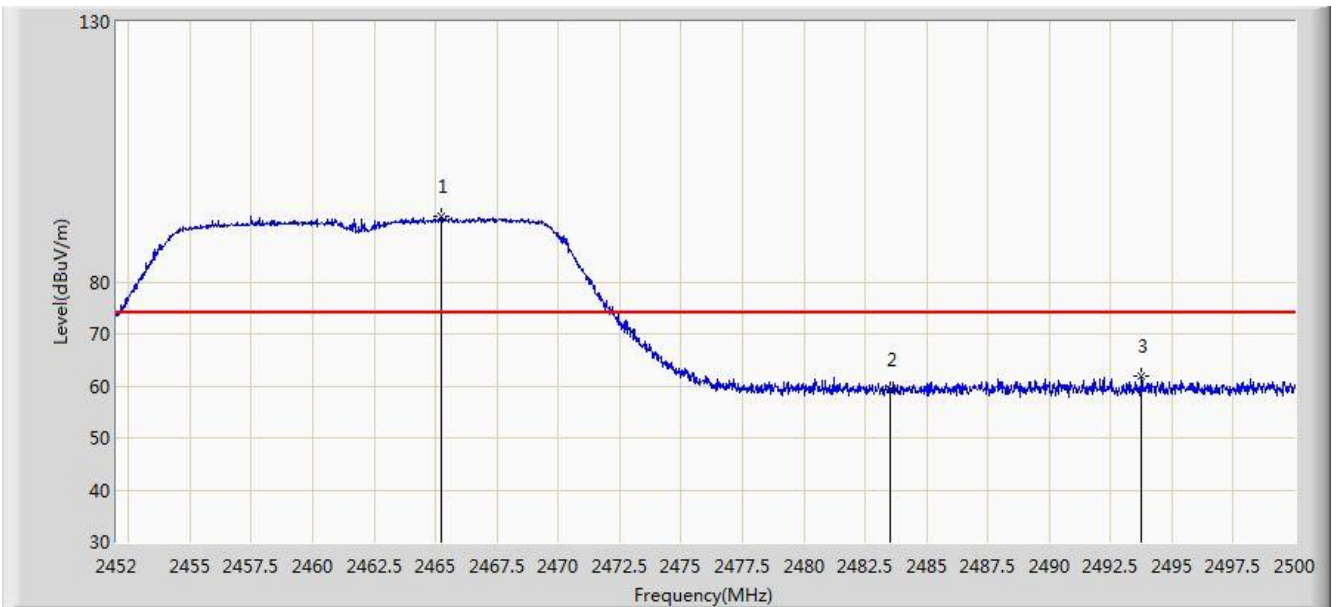


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2465.248	92.634	60.347	N/A	N/A	32.287	PK
2			2483.500	59.359	27.020	-14.641	74.000	32.340	PK
3			2493.760	61.870	29.491	-12.130	74.000	32.379	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/03/22 - 05:20
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: 802.11ac Dual Band Module	Power: DC 3.3V
Test Mode: Transmit by 802.11g at Channel 2462MHz, Ant 2	

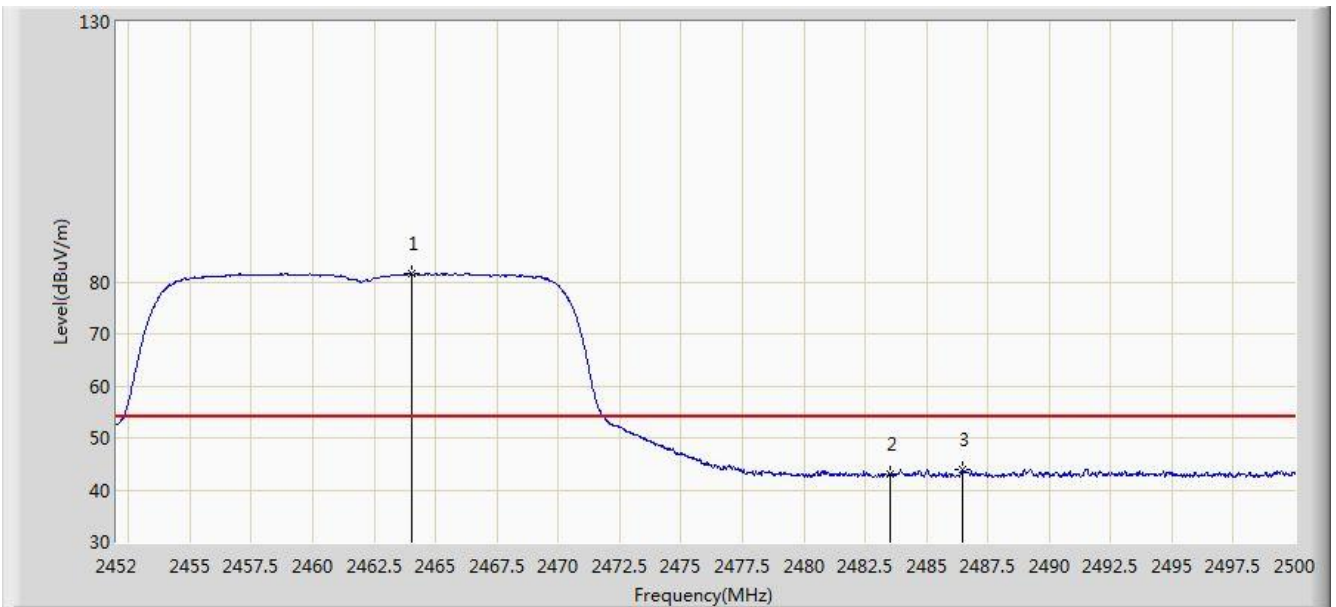


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2464.024	81.570	49.286	N/A	N/A	32.283	AV
2			2483.500	43.164	10.825	-10.836	54.000	32.340	AV
3			2486.464	43.854	11.503	-10.146	54.000	32.351	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/03/22 - 05:18
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: 802.11ac Dual Band Module	Power: DC 3.3V
Test Mode: Transmit by 802.11g at Channel 2462MHz, Ant 2	

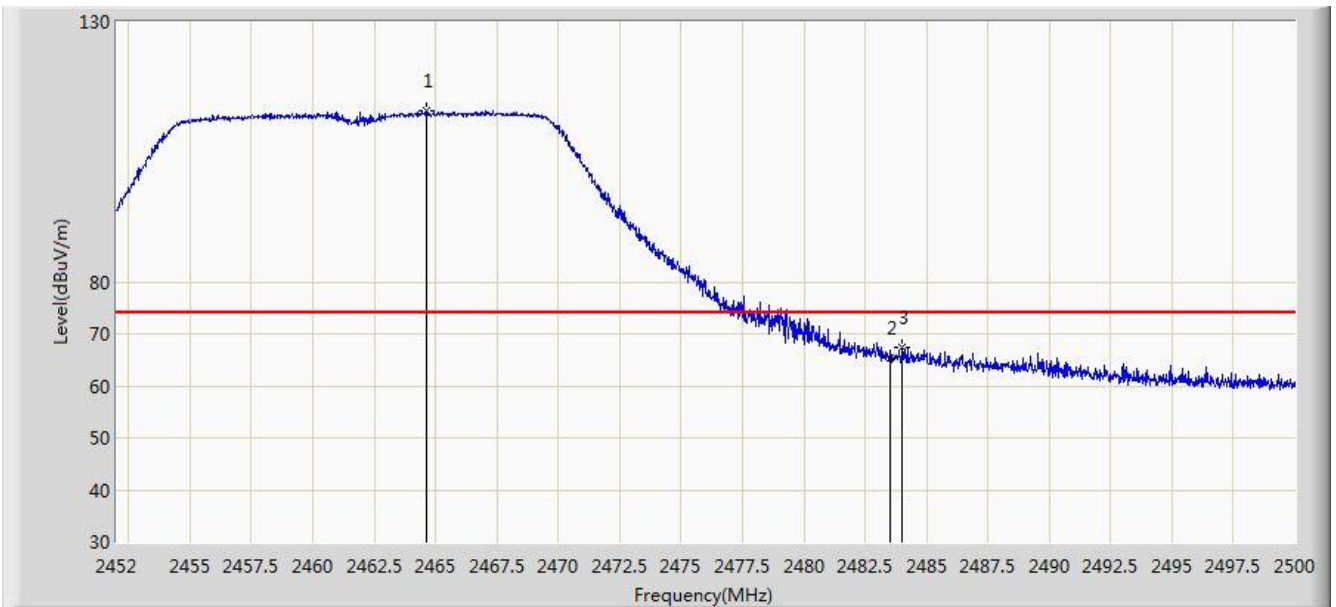


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2464.648	113.037	80.752	N/A	N/A	32.286	PK
2			2483.500	65.341	33.002	-8.659	74.000	32.340	PK
3			2484.016	67.337	34.996	-6.663	74.000	32.342	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/03/22 - 05:16
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: 802.11ac Dual Band Module	Power: DC 3.3V
Test Mode: Transmit by 802.11g at Channel 2462MHz, Ant 2	

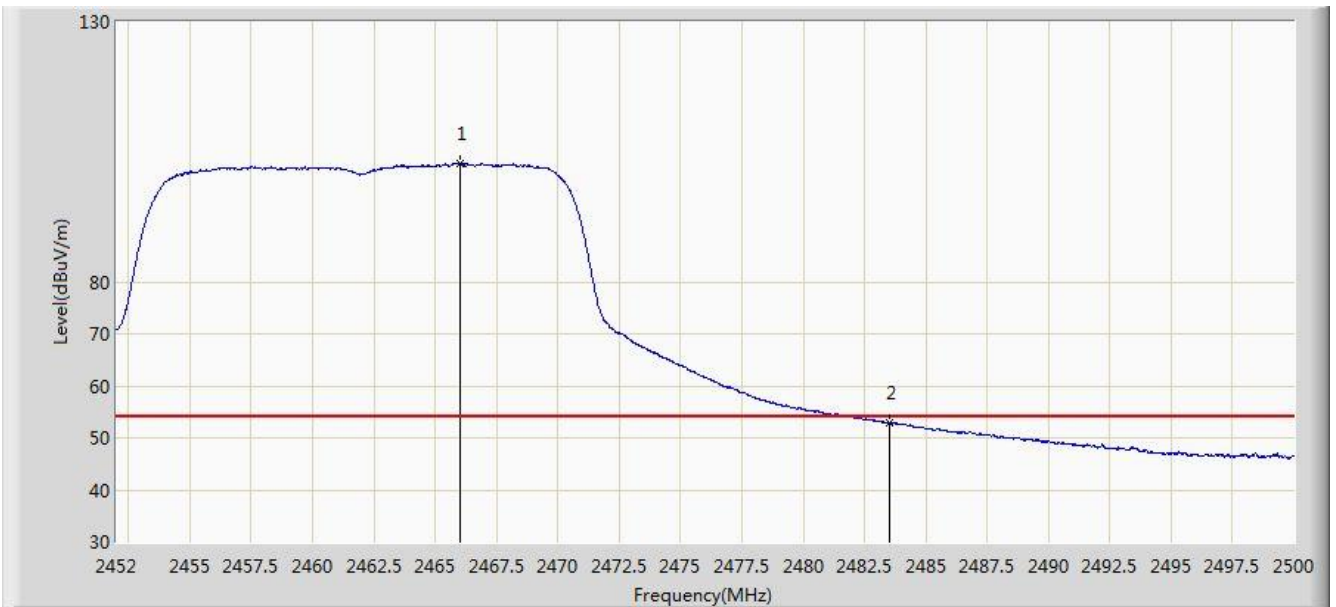


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2466.016	102.786	70.497	N/A	N/A	32.289	AV
2			2483.500	52.892	20.553	-1.108	54.000	32.340	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/03/22 - 05:28
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: 802.11ac Dual Band Module	Power: DC 3.3V
Test Mode: Transmit by 802.11n-HT20 at Channel 2412MHz, Ant 2	

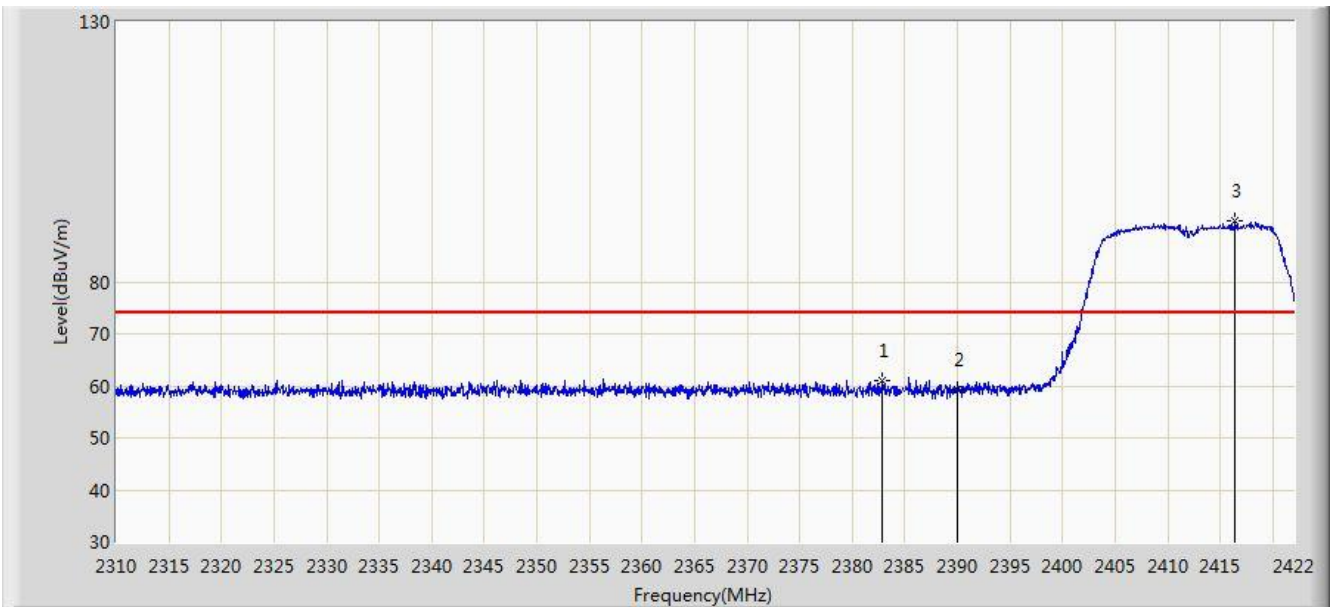


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2382.912	60.995	28.658	-13.005	74.000	32.336	PK
2			2390.000	59.247	26.920	-14.753	74.000	32.327	PK
3		*	2416.400	91.613	59.330	N/A	N/A	32.282	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/03/22 - 05:30
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: 802.11ac Dual Band Module	Power: DC 3.3V
Test Mode: Transmit by 802.11n-HT20 at Channel 2412MHz, Ant 2	

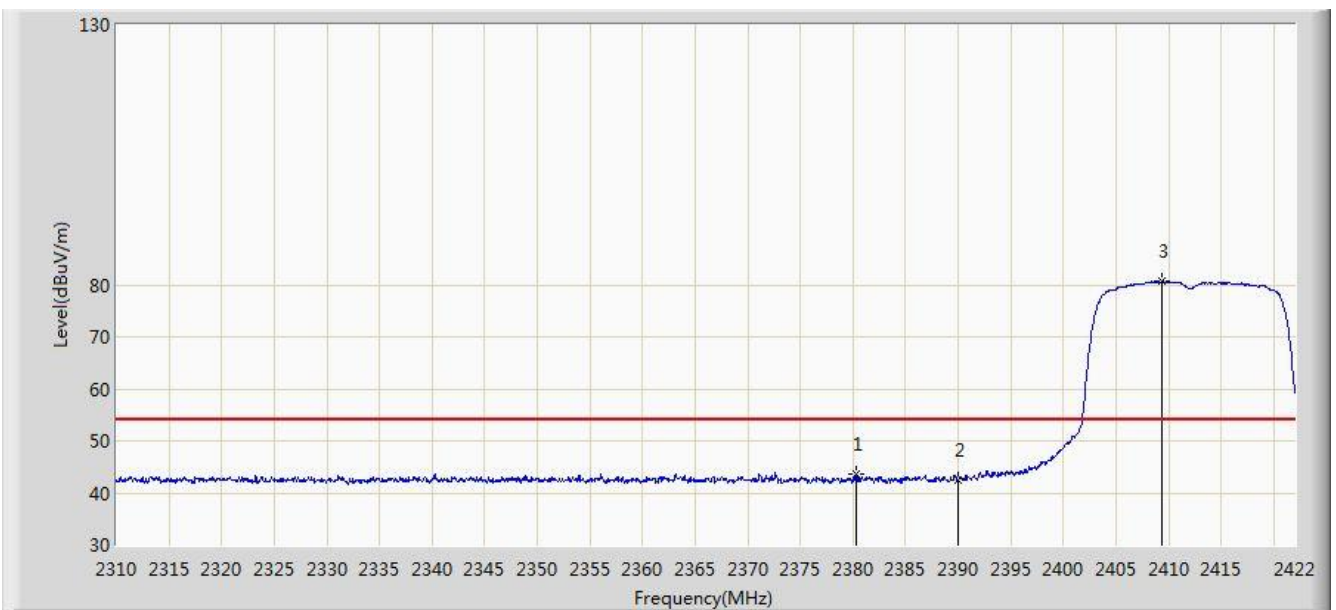


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2380.336	43.688	11.348	-10.312	54.000	32.340	AV
2			2390.000	42.444	10.117	-11.556	54.000	32.327	AV
3		*	2409.344	80.582	48.293	N/A	N/A	32.288	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/03/22 - 05:27
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: 802.11ac Dual Band Module	Power: DC 3.3V
Test Mode: Transmit by 802.11n-HT20 at Channel 2412MHz, Ant 2	

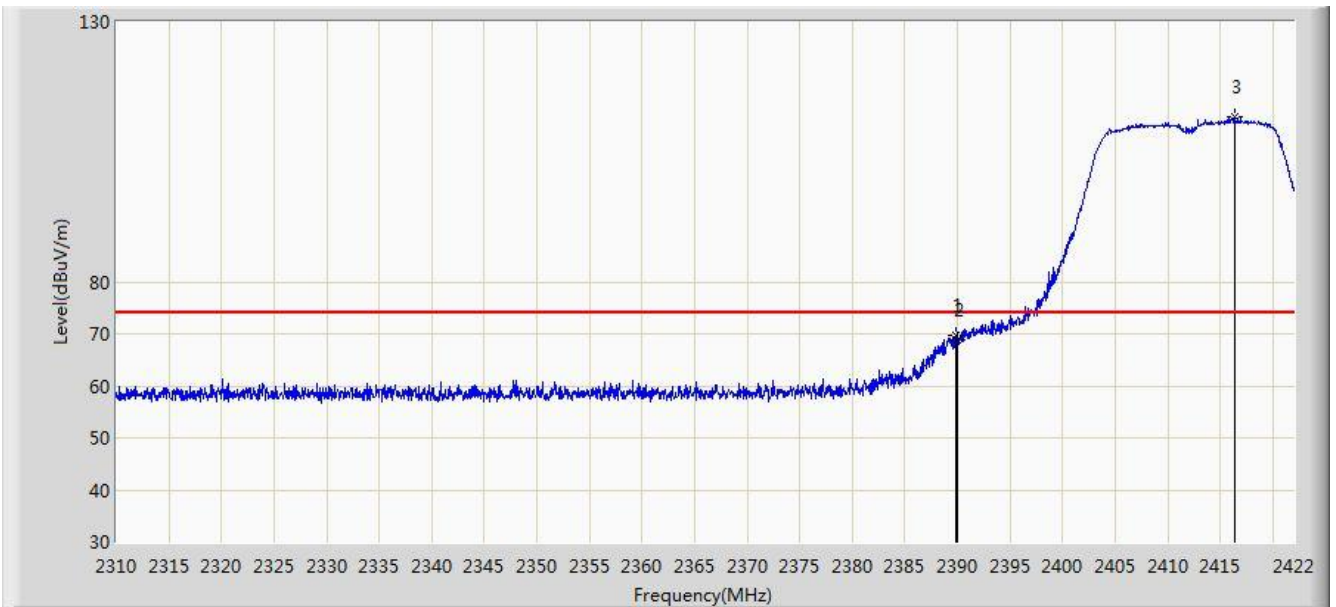


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.800	69.702	37.375	-4.298	74.000	32.327	PK
2			2390.000	68.703	36.376	-5.297	74.000	32.327	PK
3		*	2416.400	111.718	79.435	N/A	N/A	32.282	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/03/22 - 05:26
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: 802.11ac Dual Band Module	Power: DC 3.3V
Test Mode: Transmit by 802.11n-HT20 at Channel 2412MHz, Ant 2	

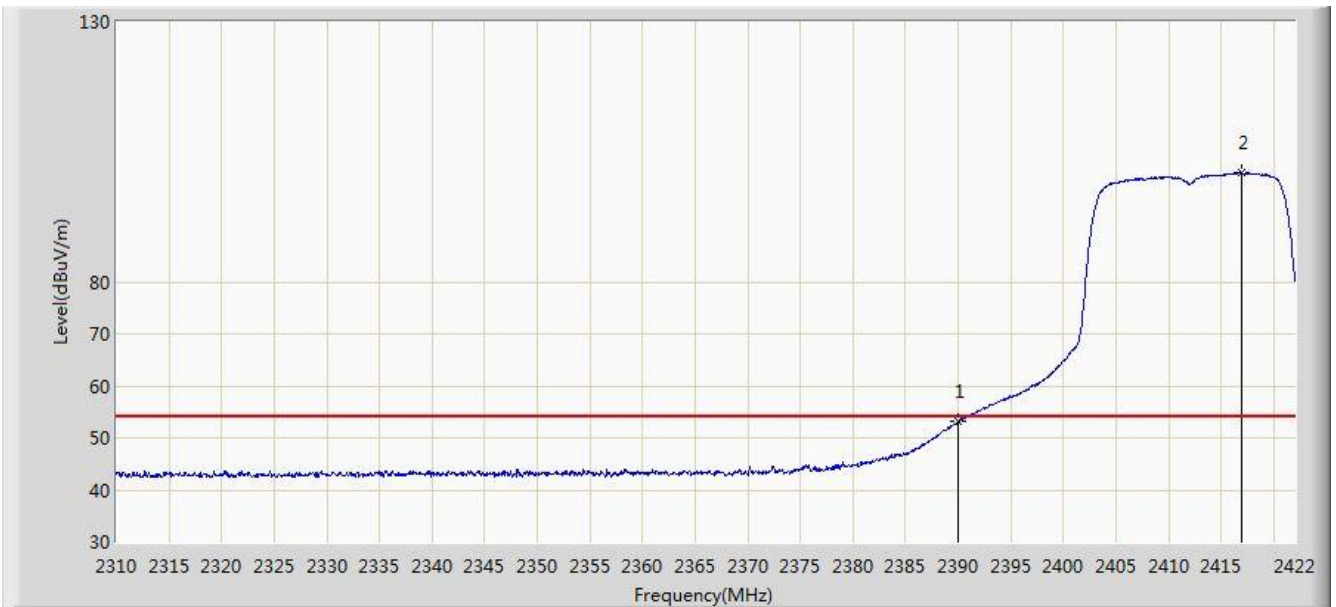


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	53.119	20.792	-0.881	54.000	32.327	AV
2		*	2416.960	100.925	68.642	N/A	N/A	32.283	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/03/27 - 06:09
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: 802.11ac Dual Band Module	Power: DC 3.3V
Test Mode: Transmit by 802.11n-HT20 at Channel 2437MHz, Ant 2	

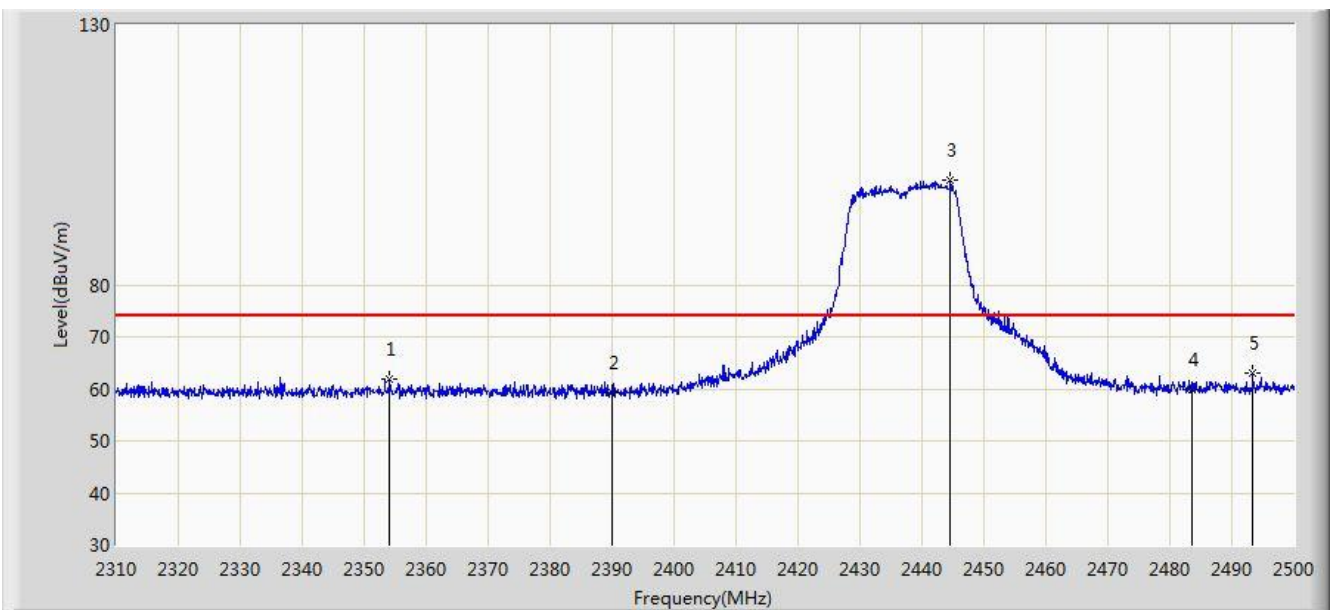


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2354.080	61.974	29.585	-12.026	74.000	32.389	PK
2			2390.000	59.372	27.045	-14.628	74.000	32.327	PK
3		*	2444.520	100.116	67.866	N/A	N/A	32.251	PK
4			2483.500	59.776	27.437	-14.224	74.000	32.340	PK
5			2493.350	62.963	30.585	-11.037	74.000	32.377	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/03/27 - 06:11
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: 802.11ac Dual Band Module	Power: DC 3.3V
Test Mode: Transmit by 802.11n-HT20 at Channel 2437MHz, Ant 2	

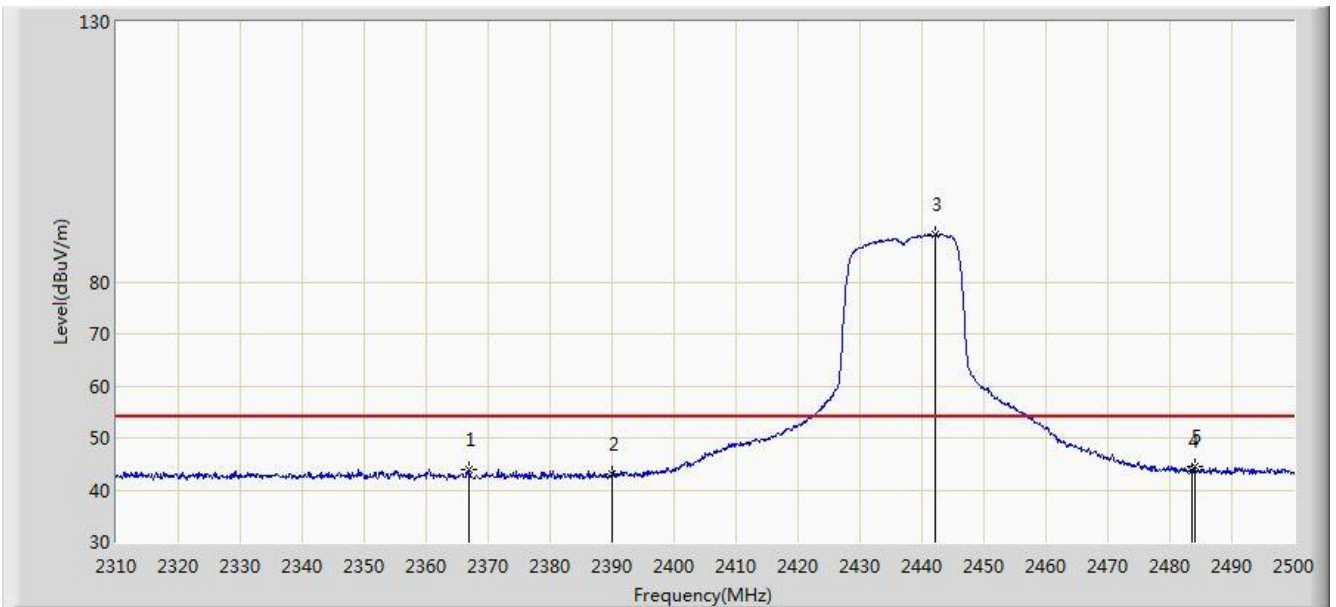


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2366.905	43.931	11.567	-10.069	54.000	32.364	AV
2			2390.000	43.095	10.768	-10.905	54.000	32.327	AV
3		*	2442.145	89.085	56.831	N/A	N/A	32.255	AV
4			2483.500	43.760	11.421	-10.240	54.000	32.340	AV
5			2483.945	44.352	12.011	-9.648	54.000	32.340	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/03/27 - 06:08
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: 802.11ac Dual Band Module	Power: DC 3.3V
Test Mode: Transmit by 802.11n-HT20 at Channel 2437MHz, Ant 2	

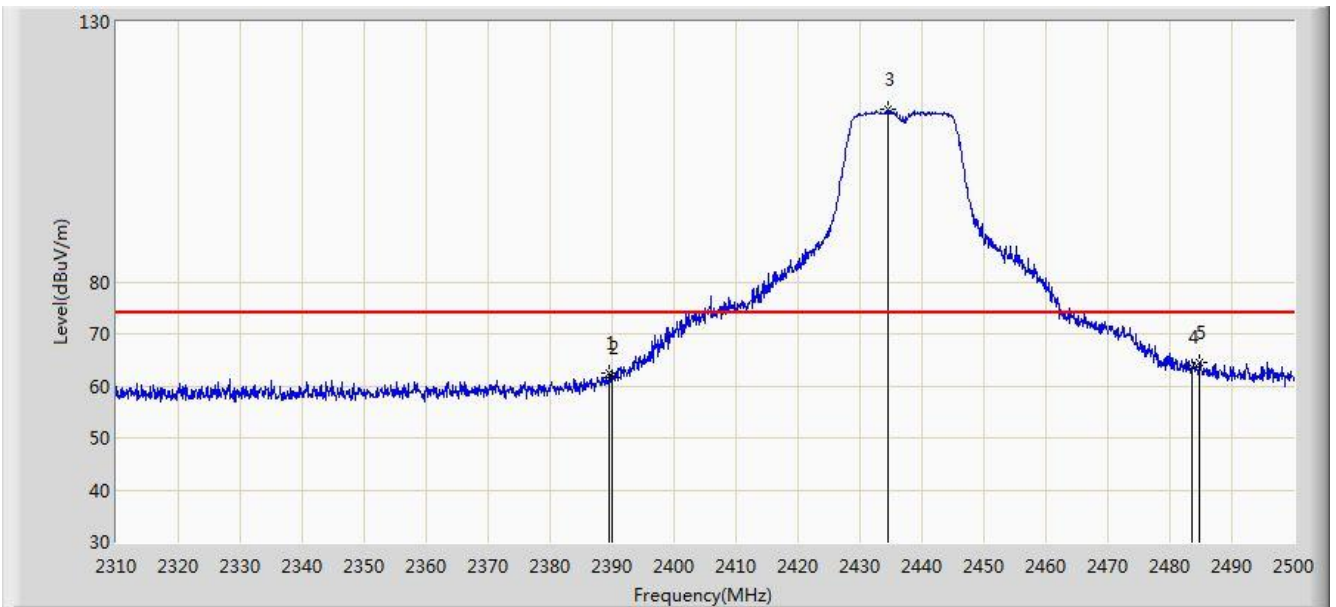


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.610	62.380	30.053	-11.620	74.000	32.328	PK
2			2390.000	61.501	29.174	-12.499	74.000	32.327	PK
3		*	2434.545	113.308	81.041	N/A	N/A	32.267	PK
4			2483.500	63.521	31.182	-10.479	74.000	32.340	PK
5			2484.800	64.581	32.237	-9.419	74.000	32.344	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/03/27 - 06:04
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: 802.11ac Dual Band Module	Power: DC 3.3V
Test Mode: Transmit by 802.11n-HT20 at Channel 2437MHz, Ant 2	

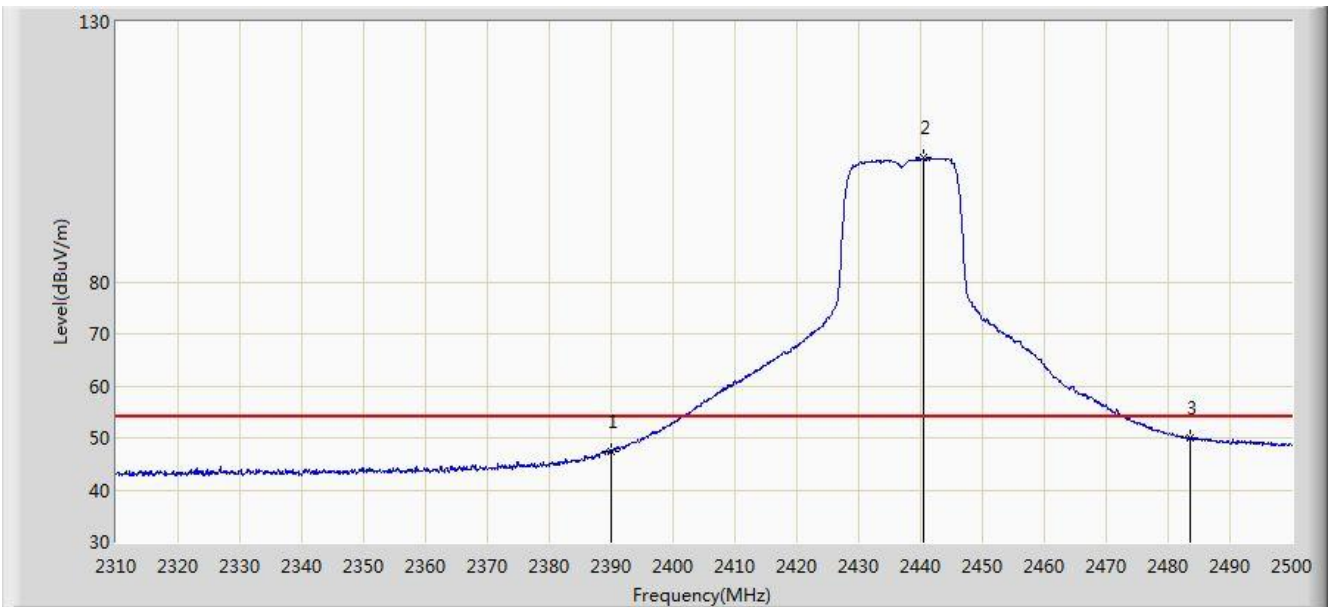


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	47.426	15.099	-6.574	54.000	32.327	AV
2		*	2440.435	103.880	71.623	N/A	N/A	32.258	AV
3			2483.500	49.979	17.640	-4.021	54.000	32.340	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/03/22 - 05:37
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: 802.11ac Dual Band Module	Power: DC 3.3V
Test Mode: Transmit by 802.11n-HT20 at Channel 2462MHz, Ant 2	

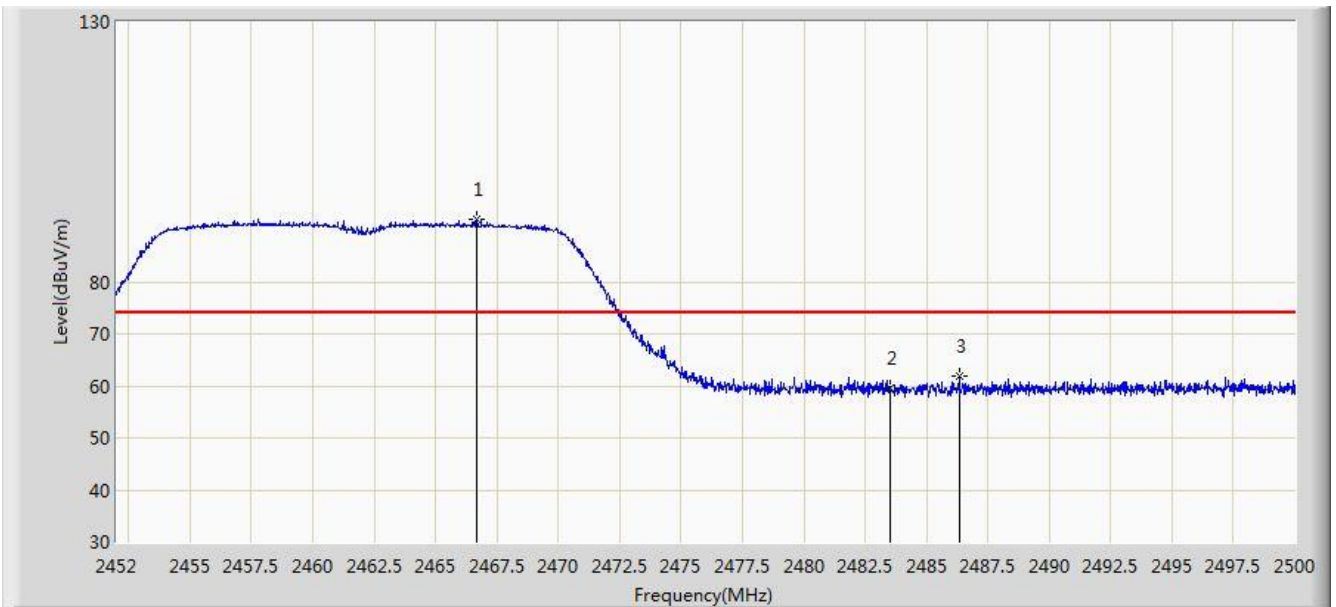


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2466.688	92.062	59.771	N/A	N/A	32.290	PK
2			2483.500	59.583	27.244	-14.417	74.000	32.340	PK
3			2486.320	61.862	29.512	-12.138	74.000	32.351	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/03/22 - 05:38
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: 802.11ac Dual Band Module	Power: DC 3.3V
Test Mode: Transmit by 802.11n-HT20 at Channel 2462MHz, Ant 2	

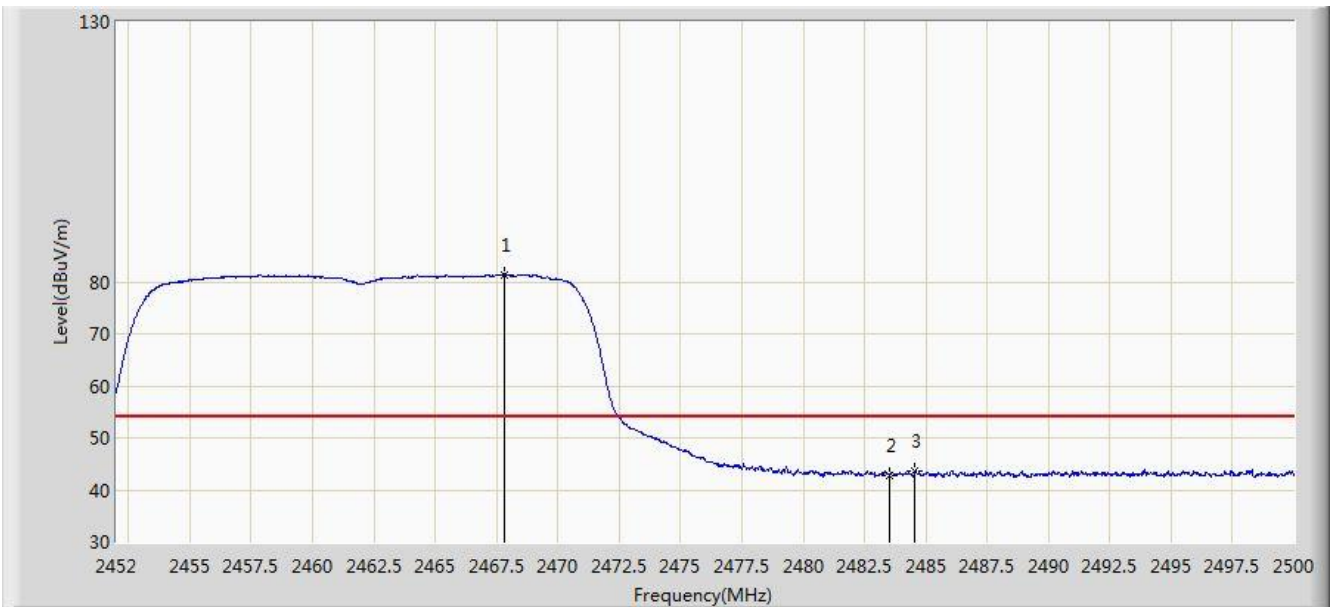


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2467.816	81.432	49.139	N/A	N/A	32.293	AV
2			2483.500	42.870	10.531	-11.130	54.000	32.340	AV
3			2484.568	43.605	11.262	-10.395	54.000	32.344	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/03/22 - 05:36
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: 802.11ac Dual Band Module	Power: DC 3.3V
Test Mode: Transmit by 802.11n-HT20 at Channel 2462MHz, Ant 2	

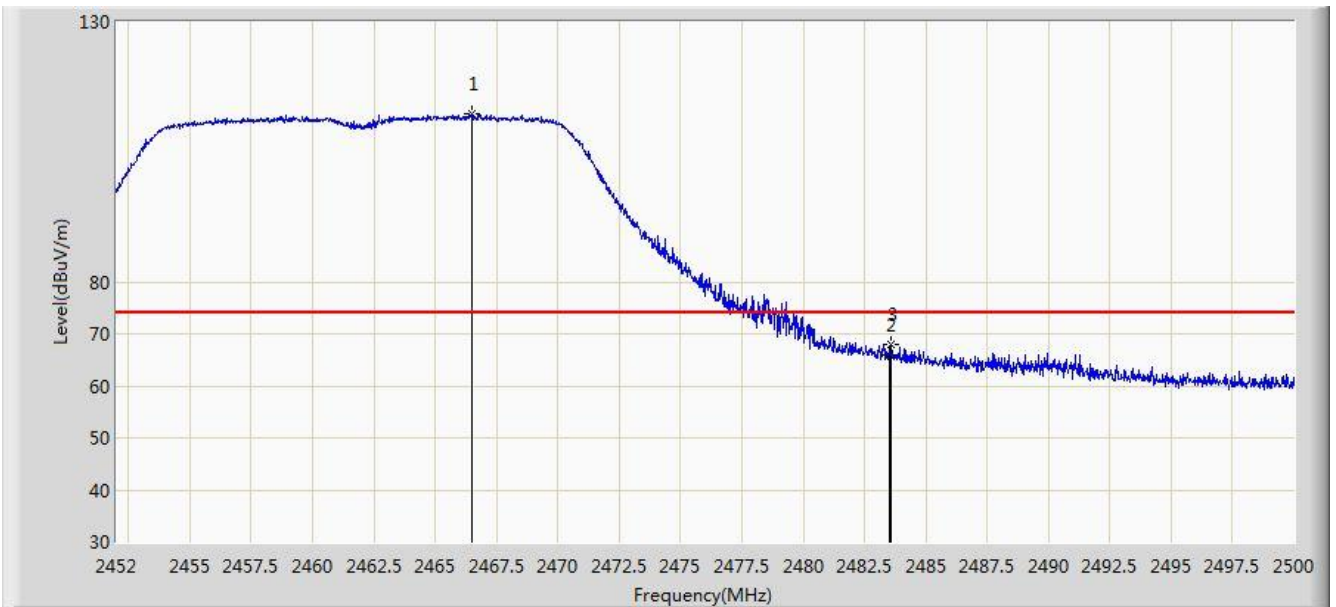


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2466.496	112.460	80.170	N/A	N/A	32.290	PK
2			2483.500	65.917	33.578	-8.083	74.000	32.340	PK
3			2483.608	68.025	35.685	-5.975	74.000	32.340	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

aSite: AC1	Time: 2018/03/22 - 05:35
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: 802.11ac Dual Band Module	Power: DC 3.3V
Test Mode: Transmit by 802.11n-HT20 at Channel 2462MHz, Ant 2	

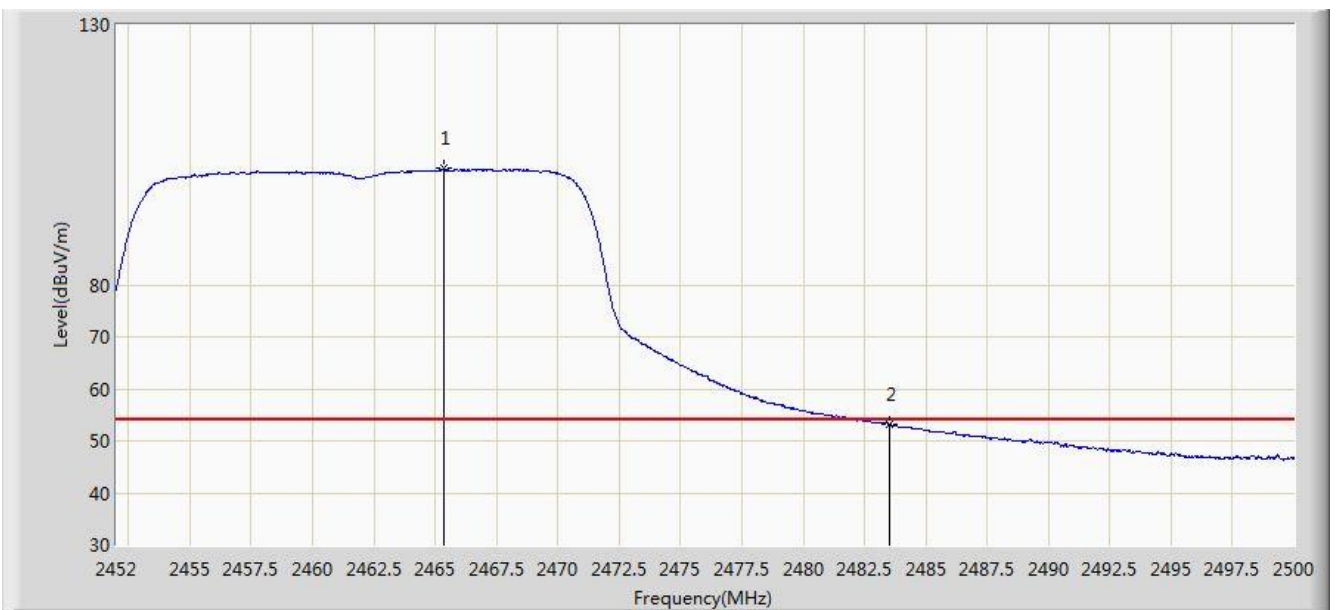


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2465.344	102.337	70.050	N/A	N/A	32.287	AV
2			2483.500	53.200	20.861	-0.800	54.000	32.340	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/03/22 - 05:48
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: 802.11ac Dual Band Module	Power: DC 3.3V
Test Mode: Transmit by 802.11n-HT40 at Channel 2422MHz, Ant 2	

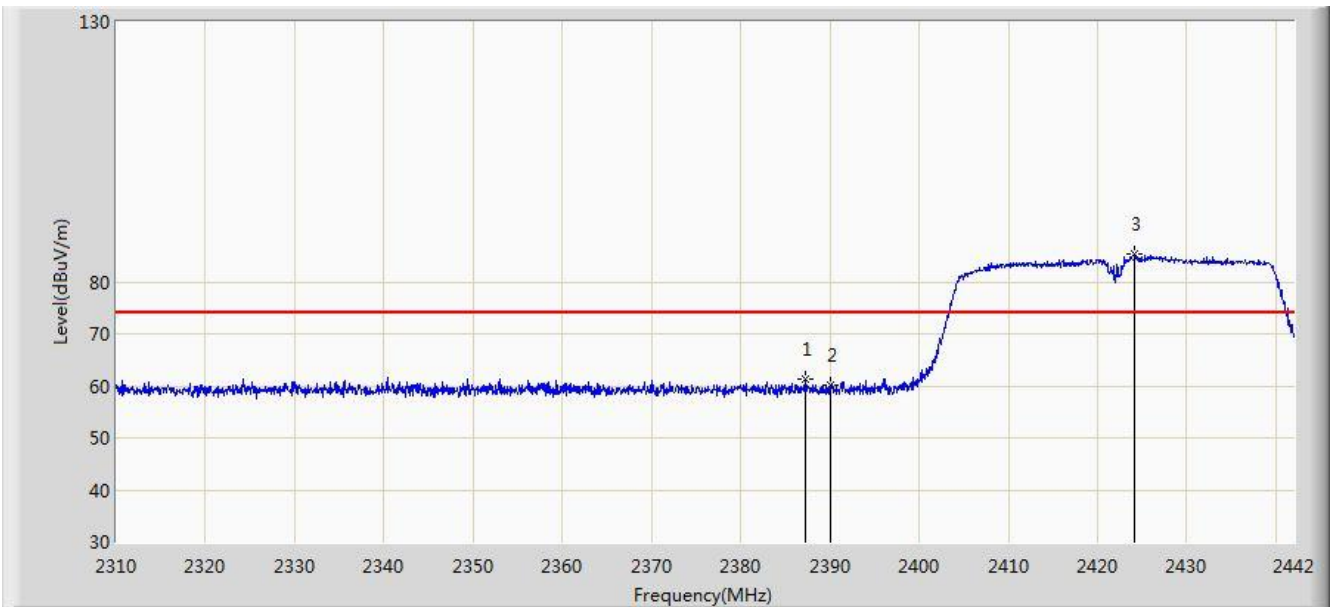


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2387.286	61.278	28.947	-12.722	74.000	32.331	PK
2			2390.000	60.070	27.743	-13.930	74.000	32.327	PK
3		*	2424.180	85.303	53.023	N/A	N/A	32.280	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/03/22 - 05:50
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: 802.11ac Dual Band Module	Power: DC 3.3V
Test Mode: Transmit by 802.11n-HT40 at Channel 2422MHz, Ant 2	

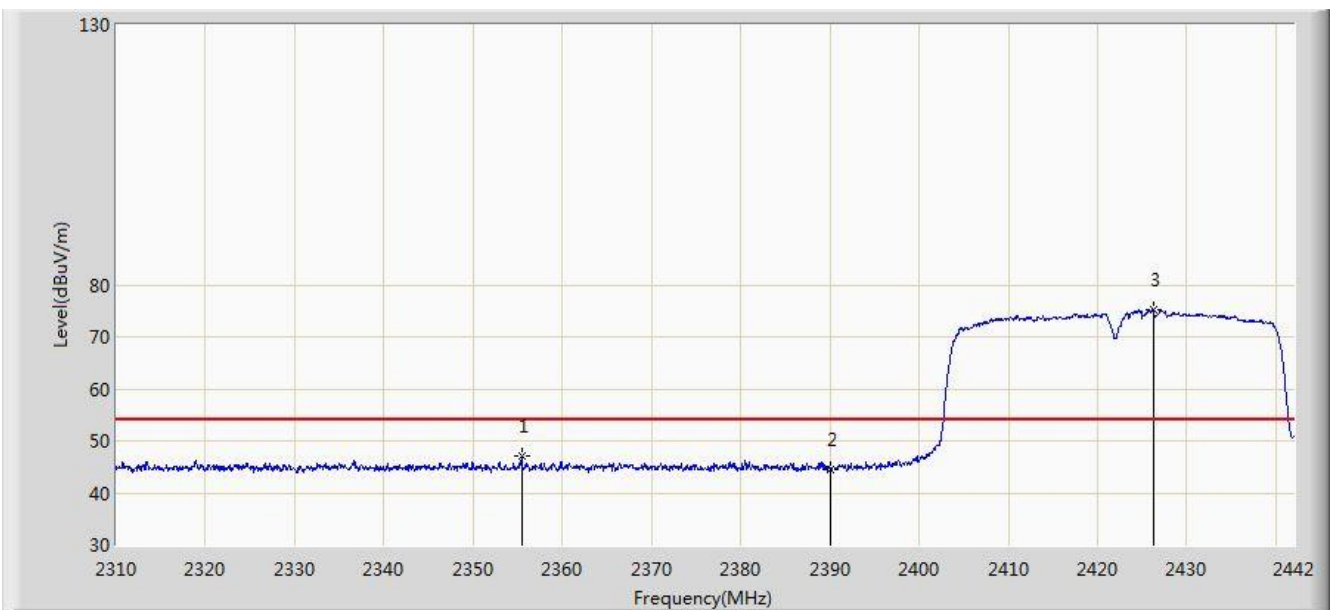


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2355.408	46.958	14.572	-7.042	54.000	32.385	AV
2			2390.000	44.539	12.212	-9.461	54.000	32.327	AV
3		*	2426.226	75.249	42.970	N/A	N/A	32.279	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/03/22 - 05:47
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: 802.11ac Dual Band Module	Power: DC 3.3V
Test Mode: Transmit by 802.11n-HT40 at Channel 2422MHz, Ant 2	

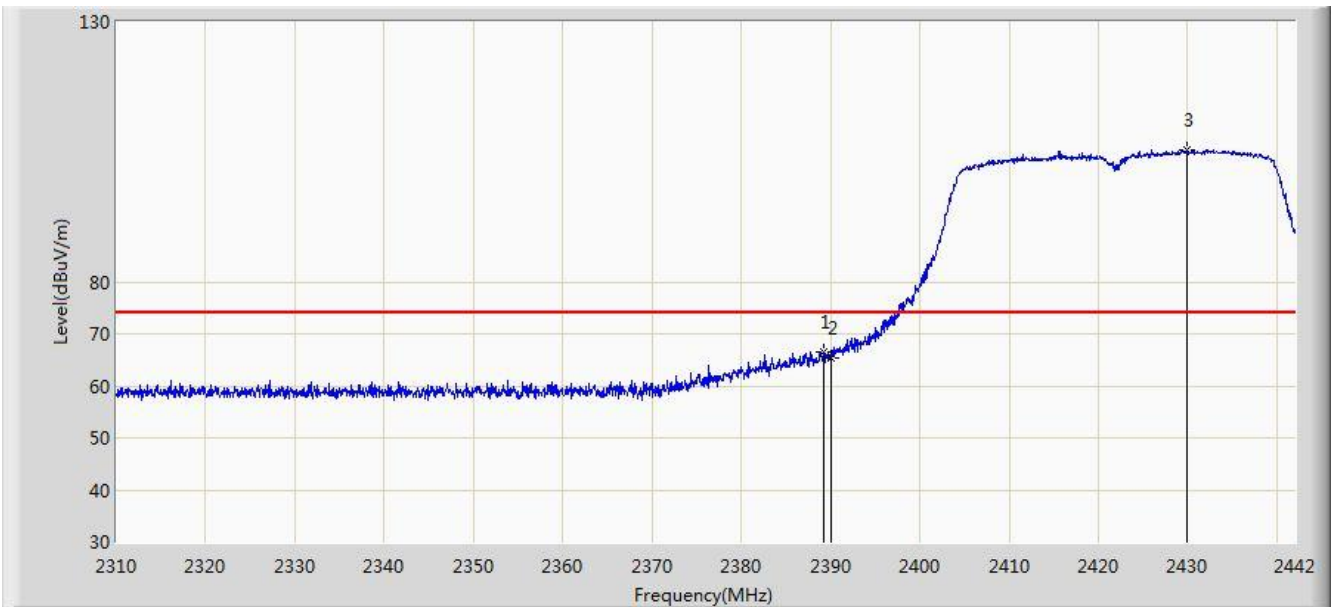


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.200	66.637	34.309	-7.363	74.000	32.328	PK
2			2390.000	65.472	33.145	-8.528	74.000	32.327	PK
3		*	2429.922	105.460	73.185	N/A	N/A	32.274	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/03/22 - 05:45
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: 802.11ac Dual Band Module	Power: DC 3.3V
Test Mode: Transmit by 802.11n-HT40 at Channel 2422MHz, Ant 2	

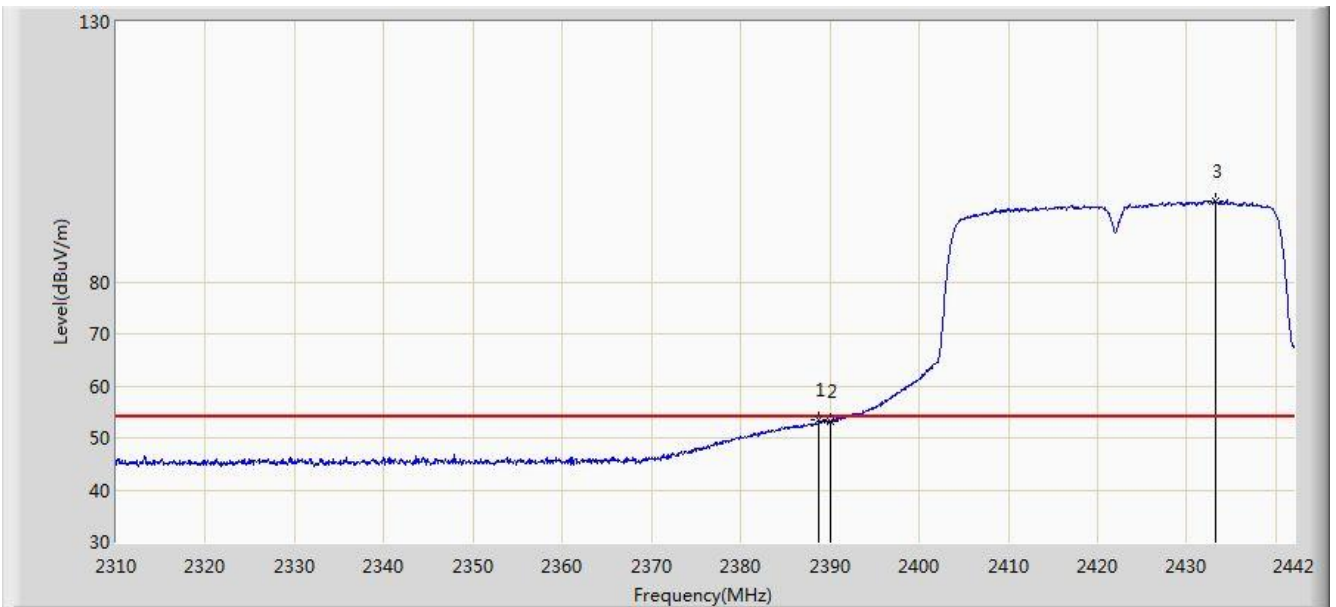


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2388.738	53.435	21.106	-0.565	54.000	32.328	AV
2			2390.000	53.320	20.993	-0.680	54.000	32.327	AV
3		*	2433.156	95.570	63.301	N/A	N/A	32.269	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/03/27 - 06:22
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: 802.11ac Dual Band Module	Power: DC 3.3V
Test Mode: Transmit by 802.11n-HT40 at Channel 2437MHz, Ant 2	

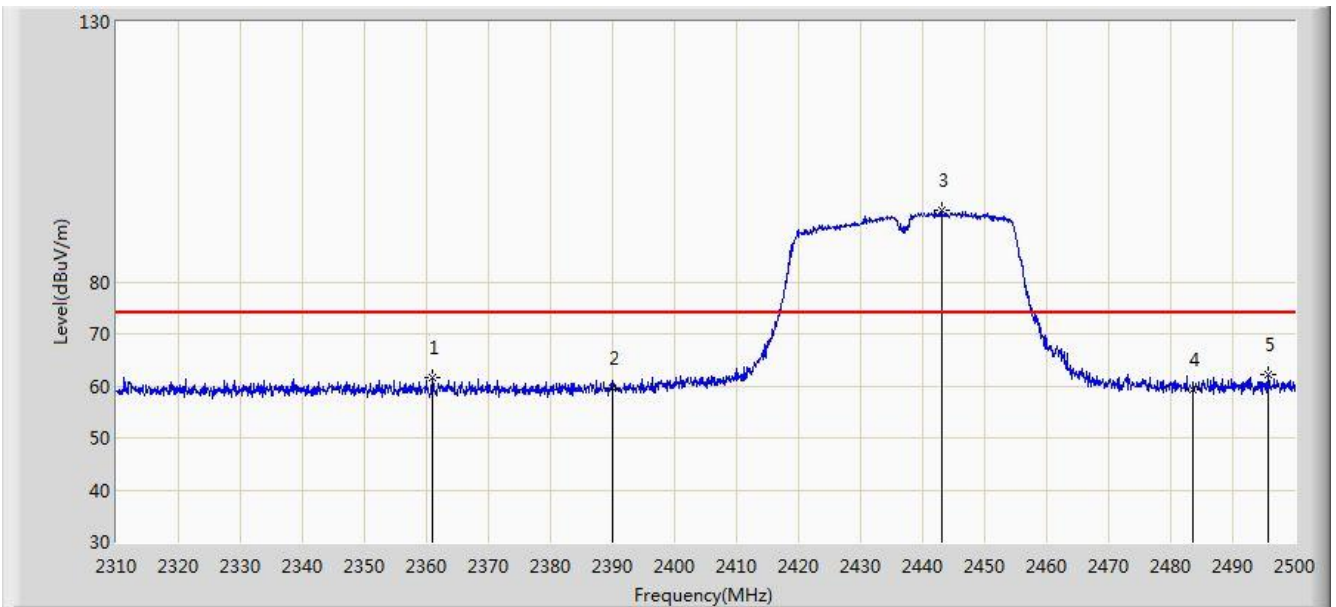


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2360.920	61.539	29.164	-12.461	74.000	32.375	PK
2			2390.000	59.653	27.326	-14.347	74.000	32.327	PK
3		*	2443.000	93.836	61.583	N/A	N/A	32.253	PK
4			2483.500	59.327	26.988	-14.673	74.000	32.340	PK
5			2495.630	62.295	29.908	-11.705	74.000	32.387	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/03/27 - 06:24
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: 802.11ac Dual Band Module	Power: DC 3.3V
Test Mode: Transmit by 802.11n-HT40 at Channel 2437MHz, Ant 2	

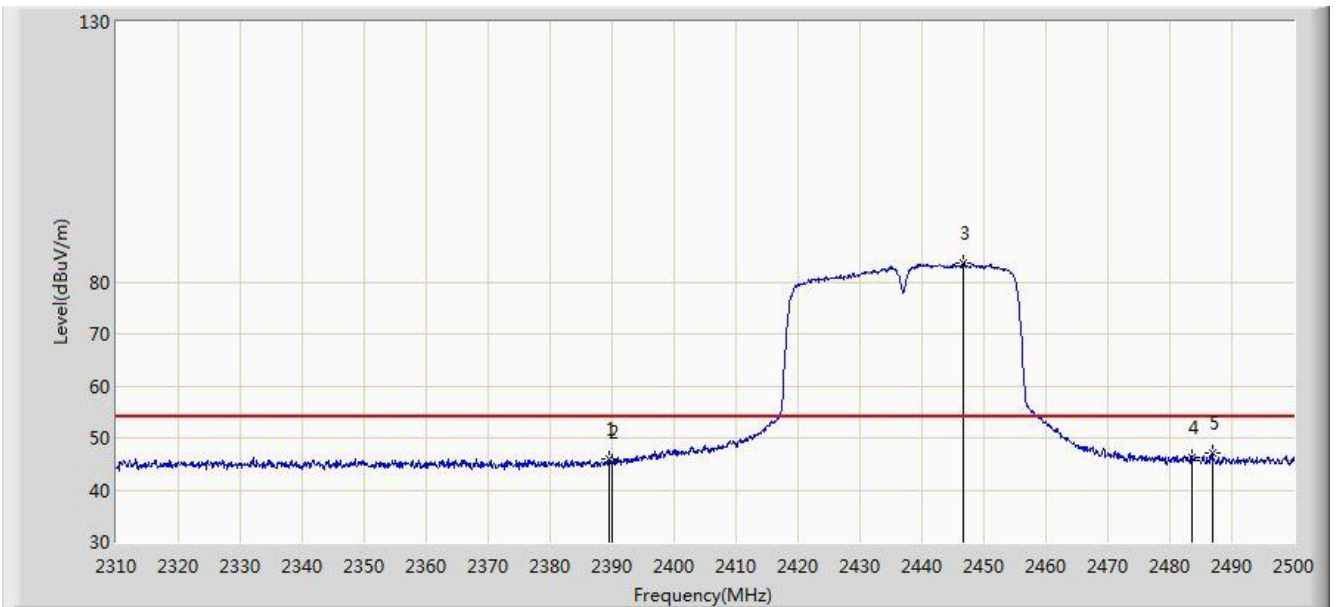


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.610	45.950	13.623	-8.050	54.000	32.328	AV
2			2390.000	45.385	13.058	-8.615	54.000	32.327	AV
3		*	2446.705	83.613	51.364	N/A	N/A	32.250	AV
4			2483.500	46.114	13.775	-7.886	54.000	32.340	AV
5			2486.795	46.958	14.606	-7.042	54.000	32.353	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/03/27 - 06:21
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: 802.11ac Dual Band Module	Power: DC 3.3V
Test Mode: Transmit by 802.11n-HT40 at Channel 2437MHz, Ant 2	

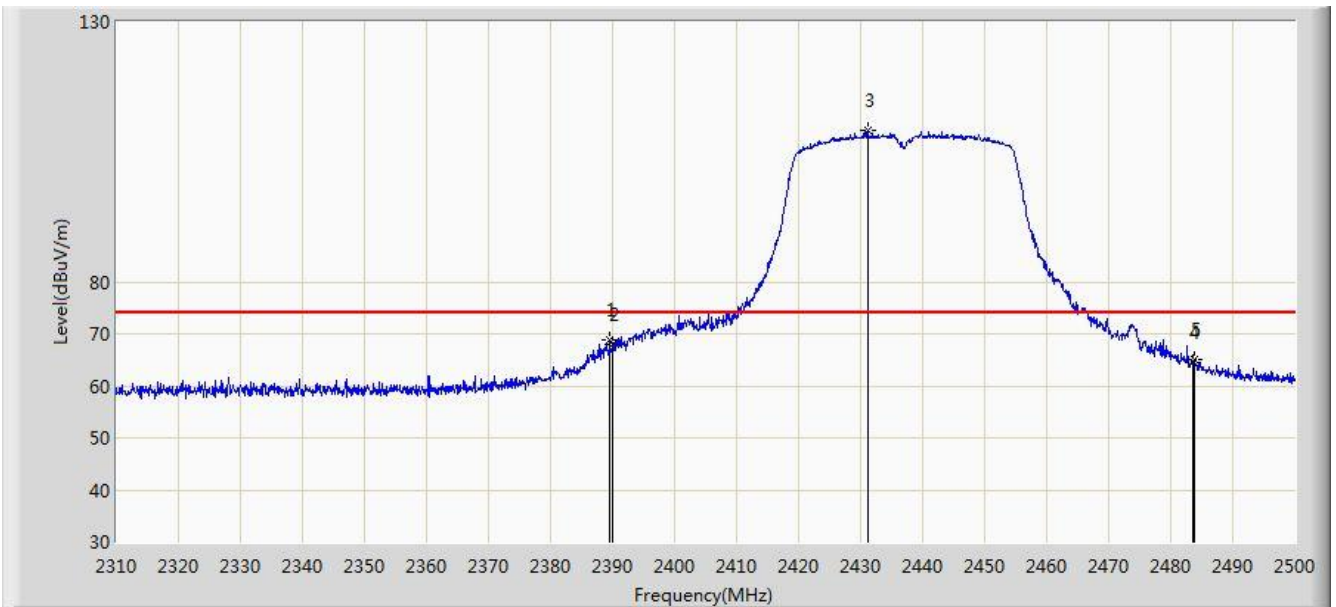


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.515	68.821	36.493	-5.179	74.000	32.327	PK
2			2390.000	67.973	35.646	-6.027	74.000	32.327	PK
3		*	2431.125	109.202	76.929	N/A	N/A	32.272	PK
4			2483.500	64.371	32.032	-9.629	74.000	32.340	PK
5			2483.850	65.017	32.676	-8.983	74.000	32.340	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/03/27 - 06:18
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: 802.11ac Dual Band Module	Power: DC 3.3V
Test Mode: Transmit by 802.11n-HT40 at Channel 2437MHz, Ant 2	

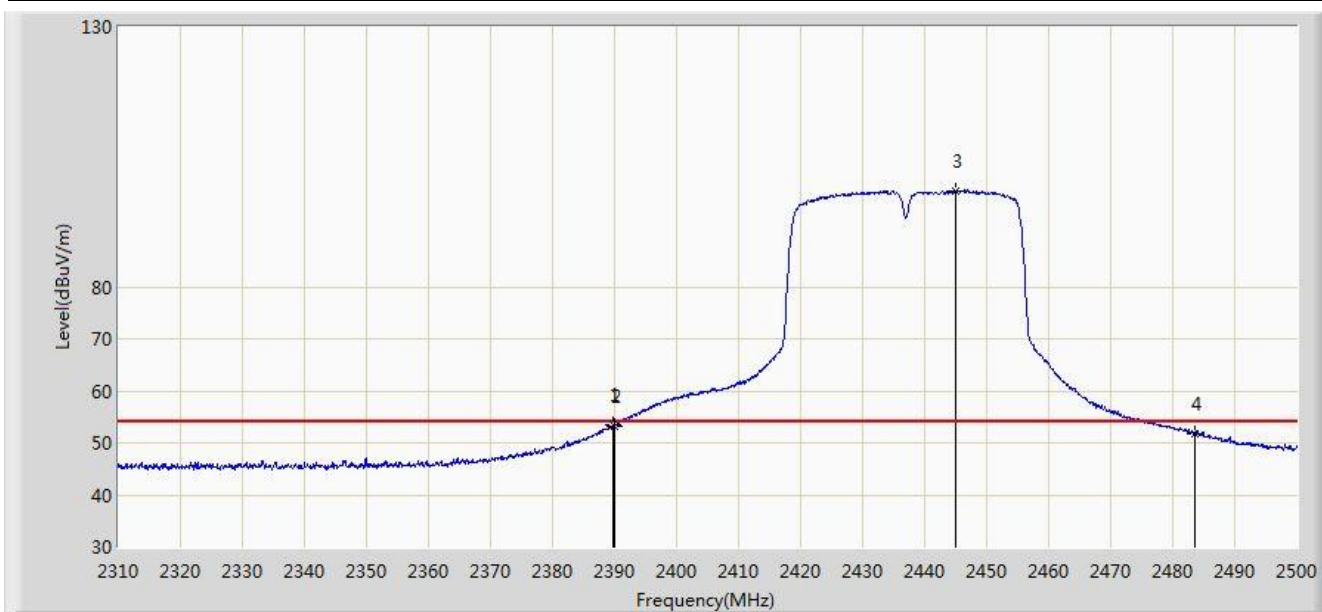


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.800	53.551	21.224	-0.449	54.000	32.327	AV
2			2390.000	53.308	20.981	-0.692	54.000	32.327	AV
3		*	2444.900	98.533	66.283	N/A	N/A	32.250	AV
4			2483.500	51.884	19.545	-2.116	54.000	32.340	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/03/22 - 05:59
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: 802.11ac Dual Band Module	Power: DC 3.3V
Test Mode: Transmit by 802.11n-HT40 at Channel 2452MHz, Ant 2	

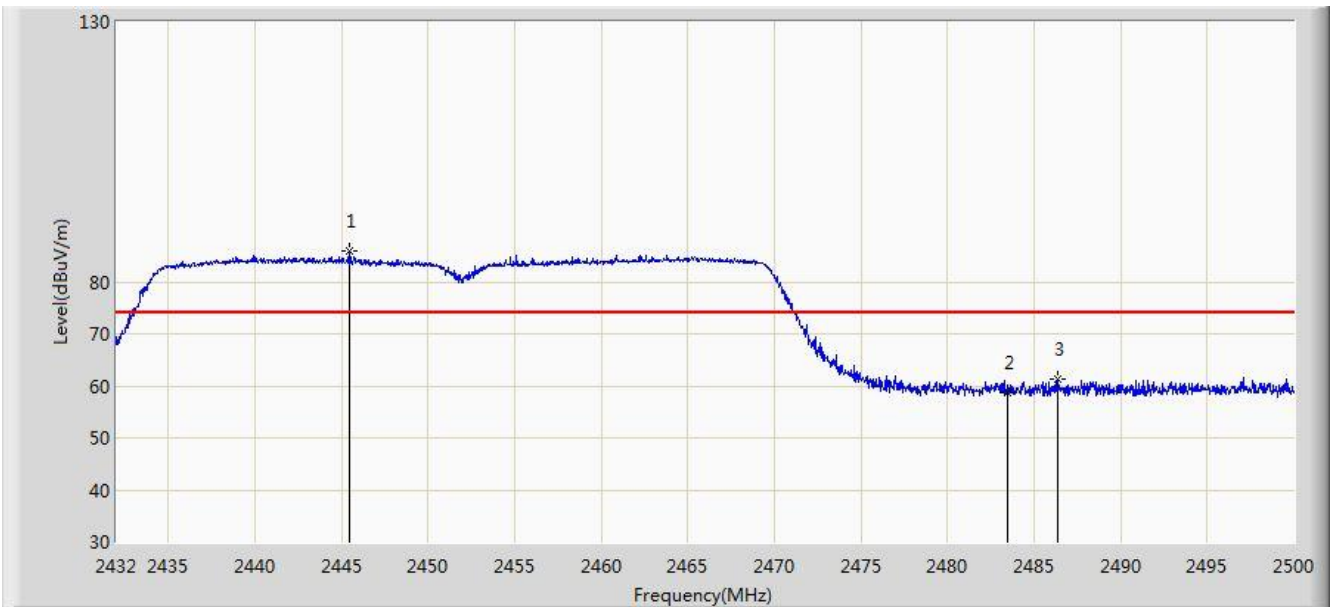


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2445.498	85.829	53.580	N/A	N/A	32.249	PK
2			2483.500	58.767	26.428	-15.233	74.000	32.340	PK
3			2486.332	61.419	29.069	-12.581	74.000	32.351	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/03/22 - 06:00
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: 802.11ac Dual Band Module	Power: DC 3.3V
Test Mode: Transmit by 802.11n-HT40 at Channel 2452MHz, Ant 2	

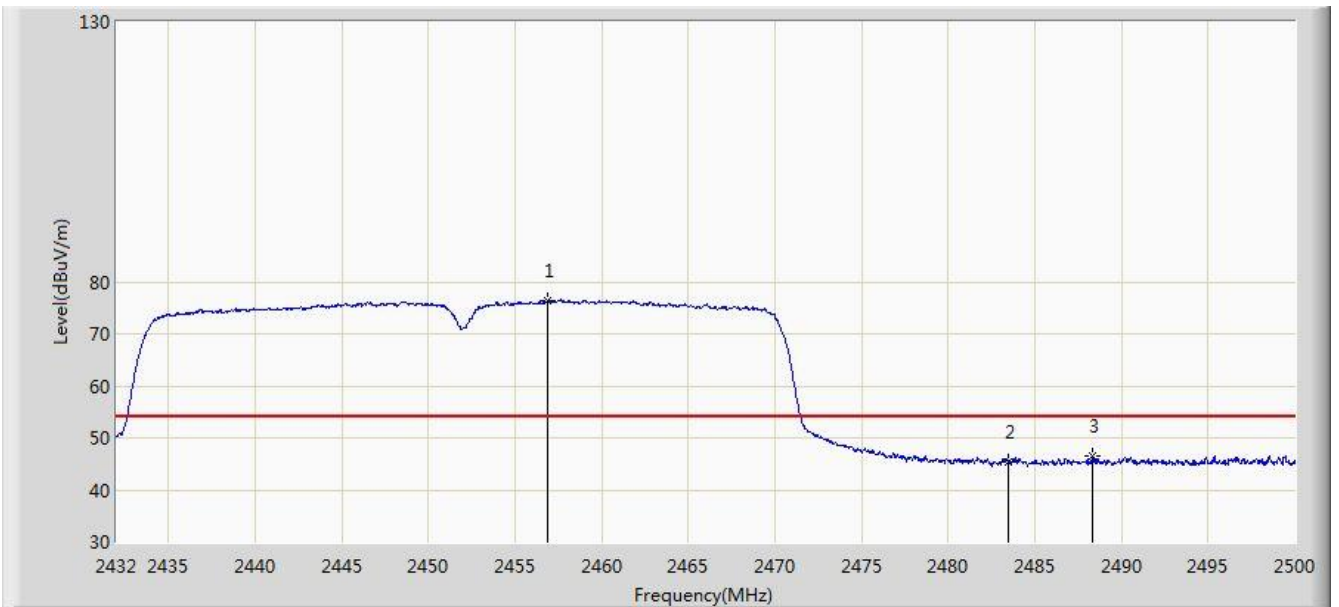


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2456.888	76.366	44.096	N/A	N/A	32.270	AV
2			2483.500	45.382	13.043	-8.618	54.000	32.340	AV
3			2488.338	46.393	14.035	-7.607	54.000	32.358	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/03/22 - 05:58
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: 802.11ac Dual Band Module	Power: DC 3.3V
Test Mode: Transmit by 802.11n-HT40 at Channel 2452MHz, Ant 2	

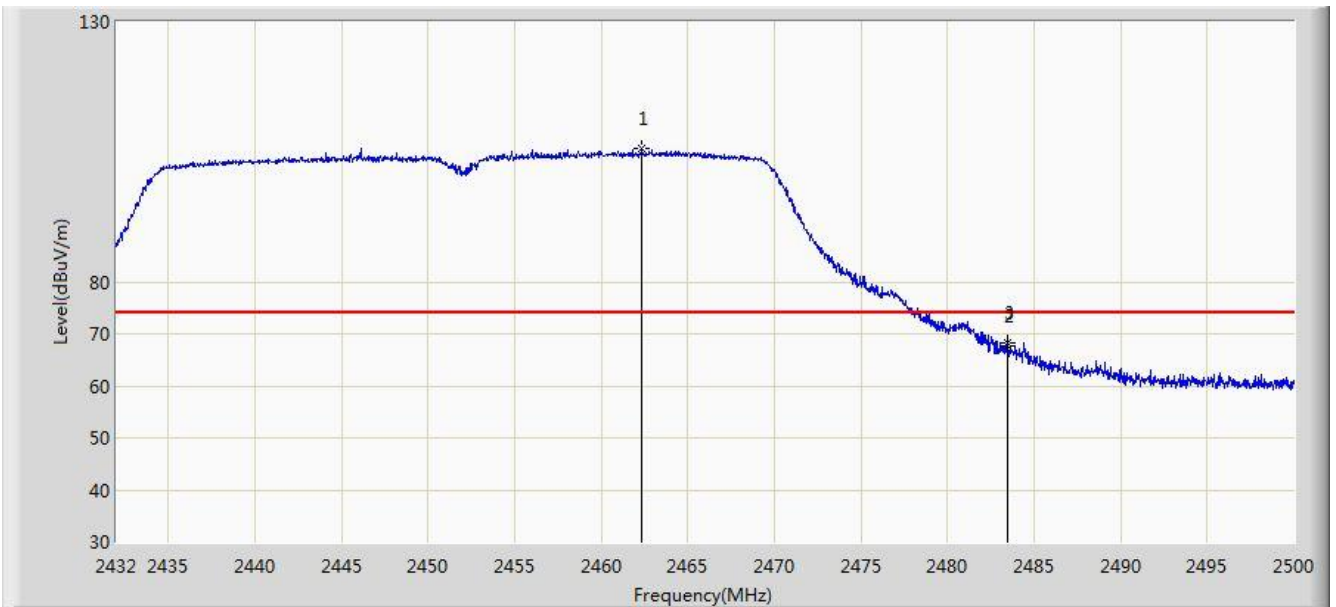


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2462.362	105.557	73.276	N/A	N/A	32.281	PK
2			2483.500	67.687	35.348	-6.313	74.000	32.340	PK
3			2483.510	68.382	36.043	-5.618	74.000	32.340	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/03/22 - 05:56
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: 802.11ac Dual Band Module	Power: DC 3.3V
Test Mode: Transmit by 802.11n-HT40 at Channel 2452MHz, Ant 2	

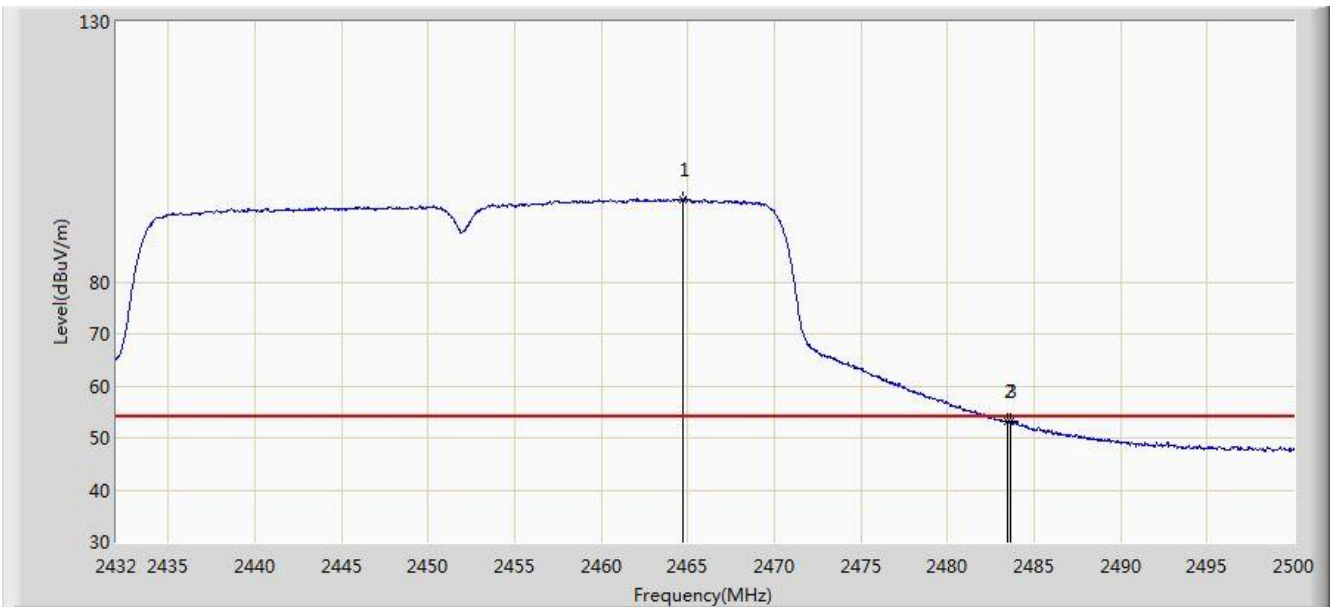


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2464.742	95.851	63.565	N/A	N/A	32.286	AV
2			2483.500	53.080	20.741	-0.920	54.000	32.340	AV
3			2483.646	53.098	20.758	-0.902	54.000	32.340	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/03/22 - 22:58
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: 802.11ac Dual Band Module	Power: DC 3.3V
Test Mode: Transmit by 802.11n-HT20 at Channel 2412MHz, Ant 0 + 1	

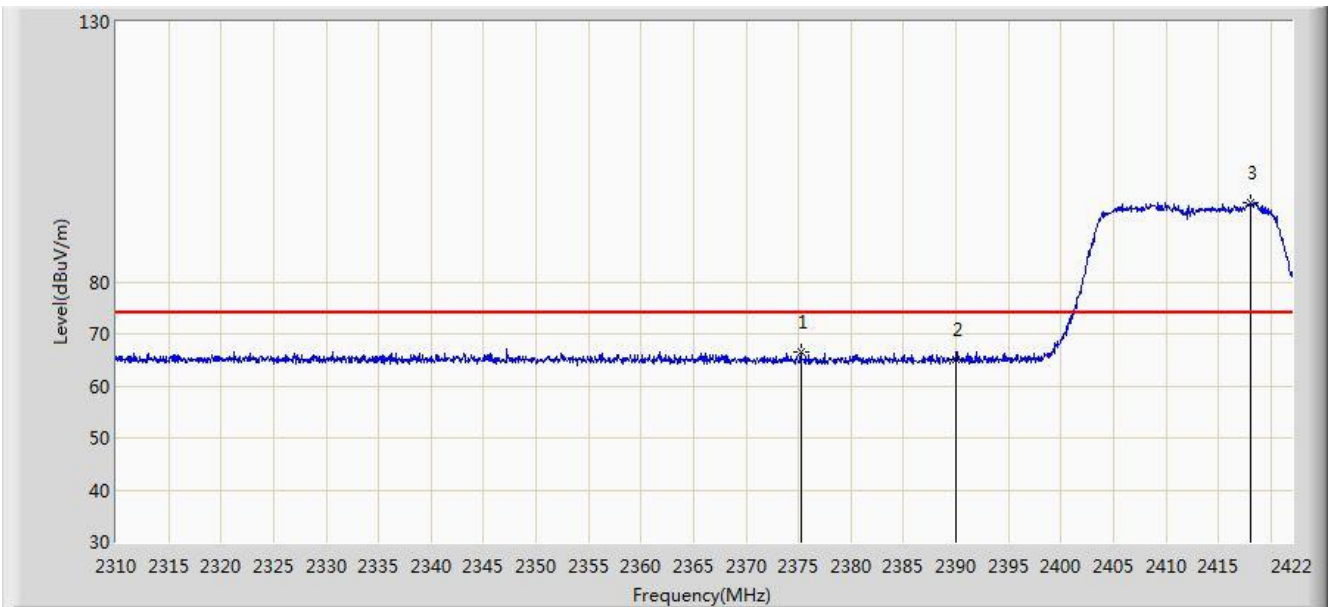


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2375.240	66.519	34.171	-7.481	74.000	32.348	PK
2			2390.000	65.165	32.838	-8.835	74.000	32.327	PK
3		*	2418.080	95.105	62.823	N/A	N/A	32.282	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/03/22 - 23:02
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: 802.11ac Dual Band Module	Power: DC 3.3V
Test Mode: Transmit by 802.11n-HT20 at Channel 2412MHz, Ant 0 + 1	

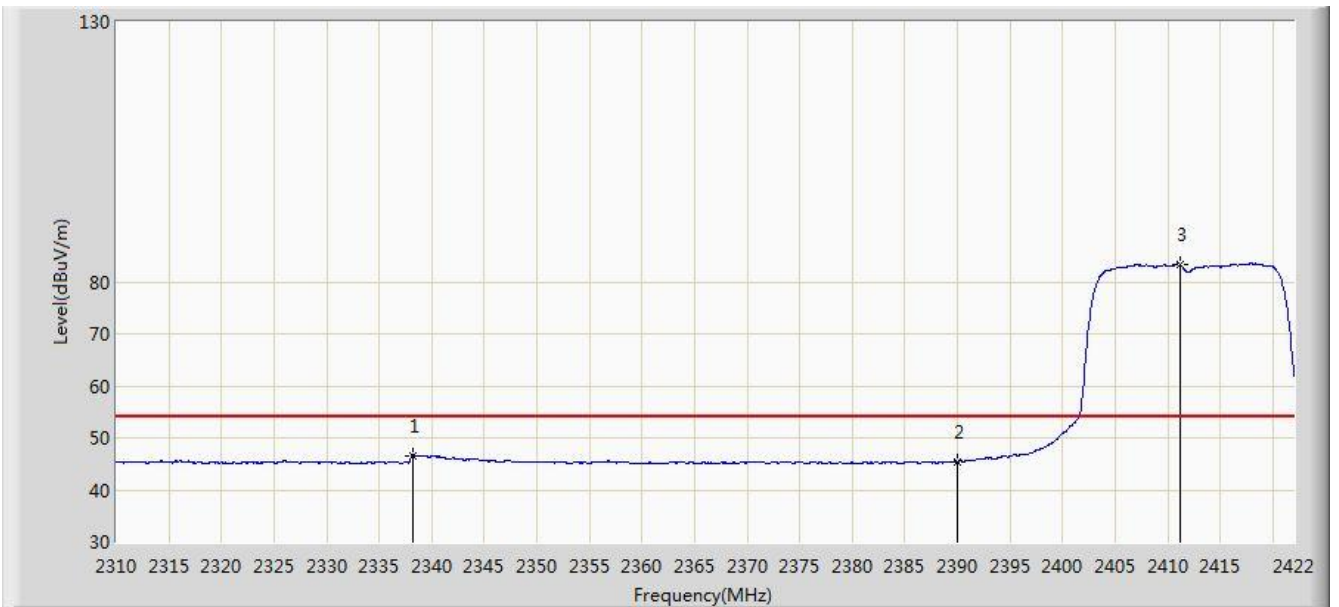


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2338.224	46.656	14.218	-7.344	54.000	32.438	AV
2			2390.000	45.347	13.020	-8.653	54.000	32.327	AV
3		*	2411.136	83.476	51.191	N/A	N/A	32.285	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/03/22 - 22:56
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: 802.11ac Dual Band Module	Power: DC 3.3V
Test Mode: Transmit by 802.11n-HT20 at Channel 2412MHz, Ant 0 + 1	

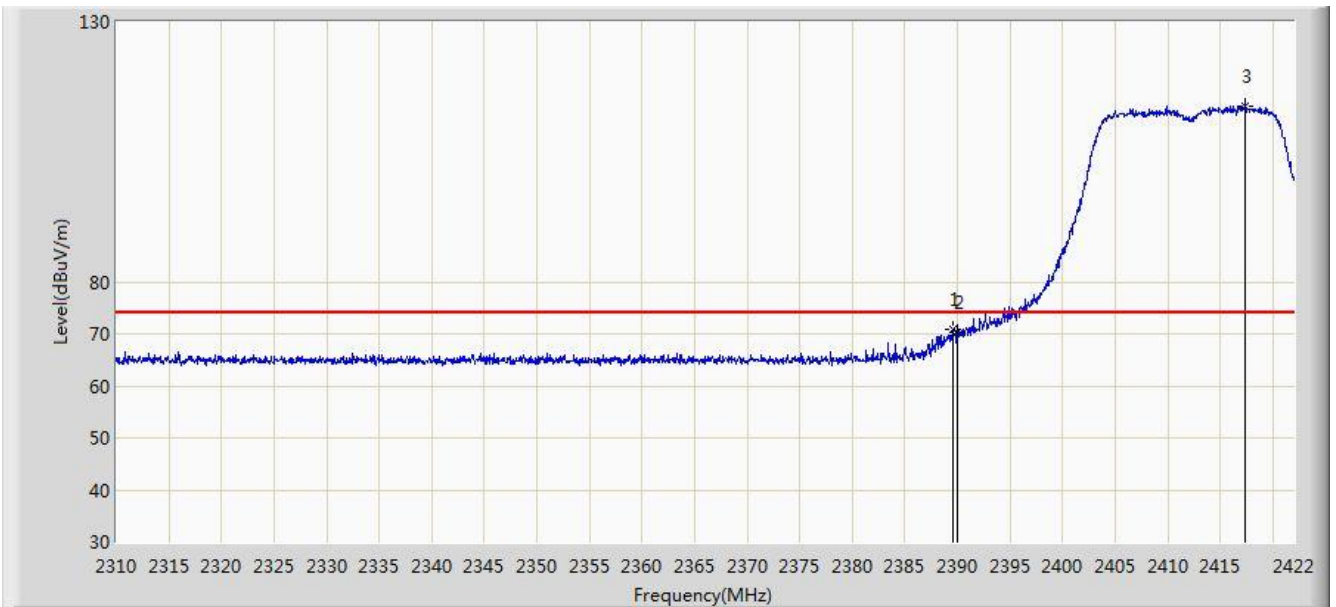


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.576	70.926	38.599	-3.074	74.000	32.328	PK
2			2390.000	70.182	37.855	-3.818	74.000	32.327	PK
3		*	2417.382	113.718	81.435	N/A	N/A	32.282	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/03/22 - 22:54
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: 802.11ac Dual Band Module	Power: DC 3.3V
Test Mode: Transmit by 802.11n-HT20 at Channel 2412MHz, Ant 0 + 1	

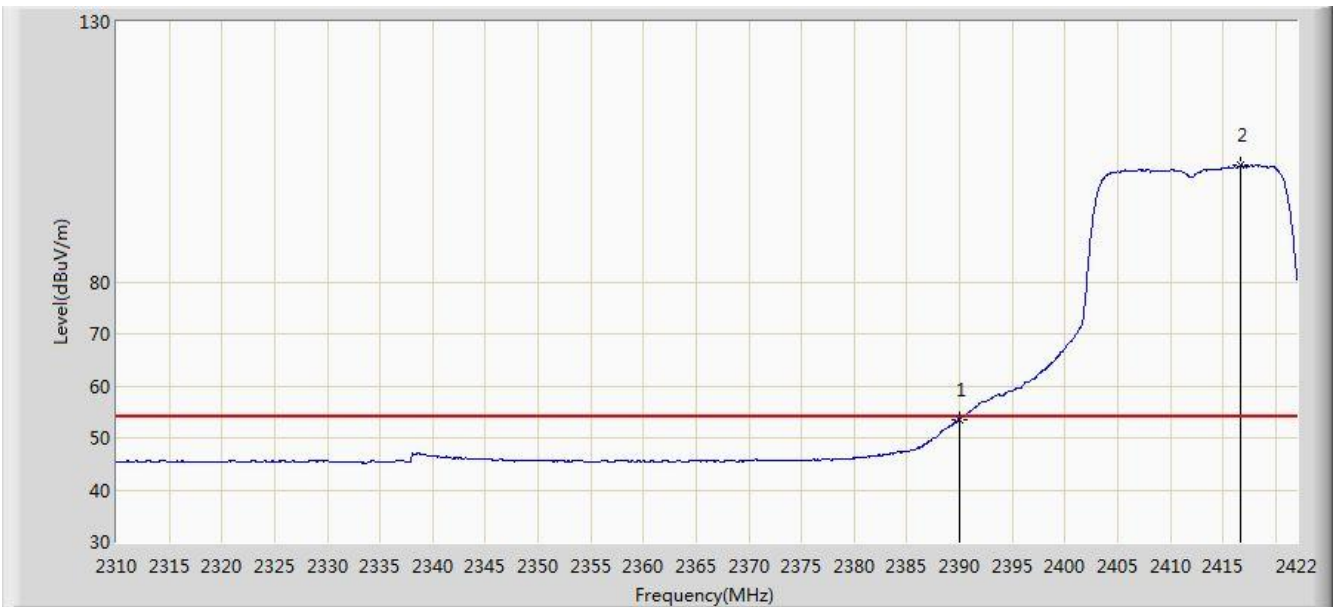


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	53.610	21.283	-0.390	54.000	32.327	AV
2		*	2416.711	102.372	70.089	N/A	N/A	32.283	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/03/27 - 04:16
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: 802.11ac Dual Band Module	Power: DC 3.3V
Test Mode: Transmit by 802.11n-HT20 at Channel 2437MHz, Ant 0 + 1	

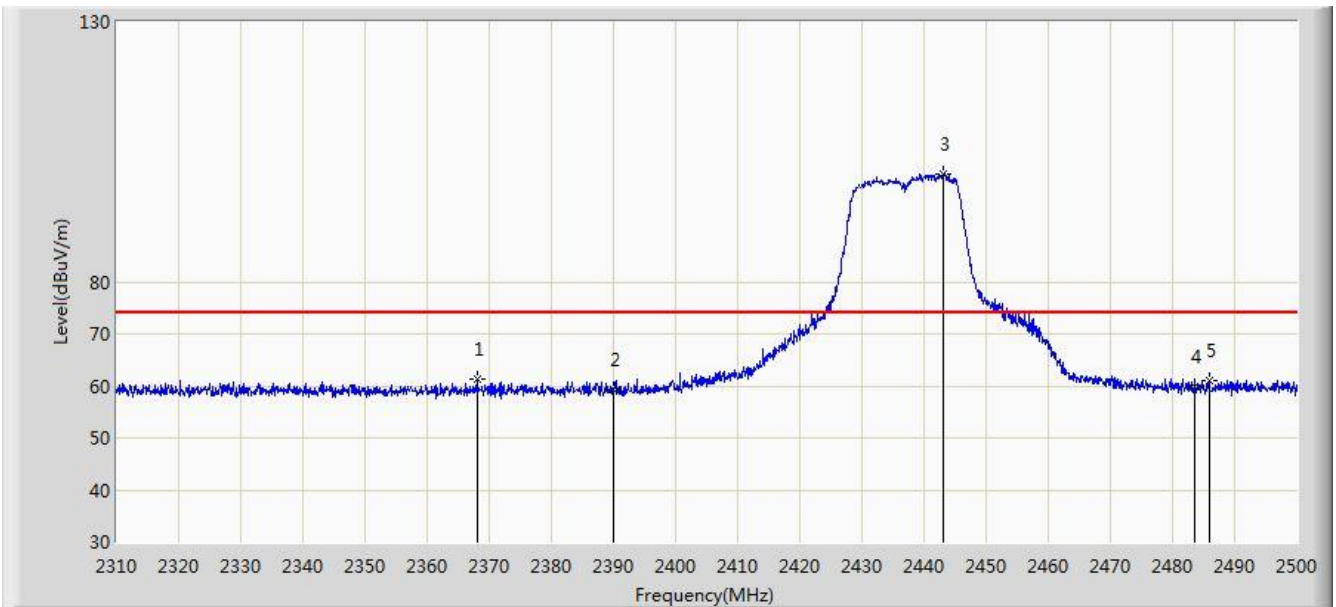


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2368.045	61.449	29.087	-12.551	74.000	32.362	PK
2			2390.000	59.203	26.876	-14.797	74.000	32.327	PK
3		*	2443.095	100.836	68.583	N/A	N/A	32.253	PK
4			2483.500	59.937	27.598	-14.063	74.000	32.340	PK
5			2485.845	61.095	28.747	-12.905	74.000	32.348	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/03/27 - 04:18
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: 802.11ac Dual Band Module	Power: DC 3.3V
Test Mode: Transmit by 802.11n-HT20 at Channel 2437MHz, Ant 0 + 1	

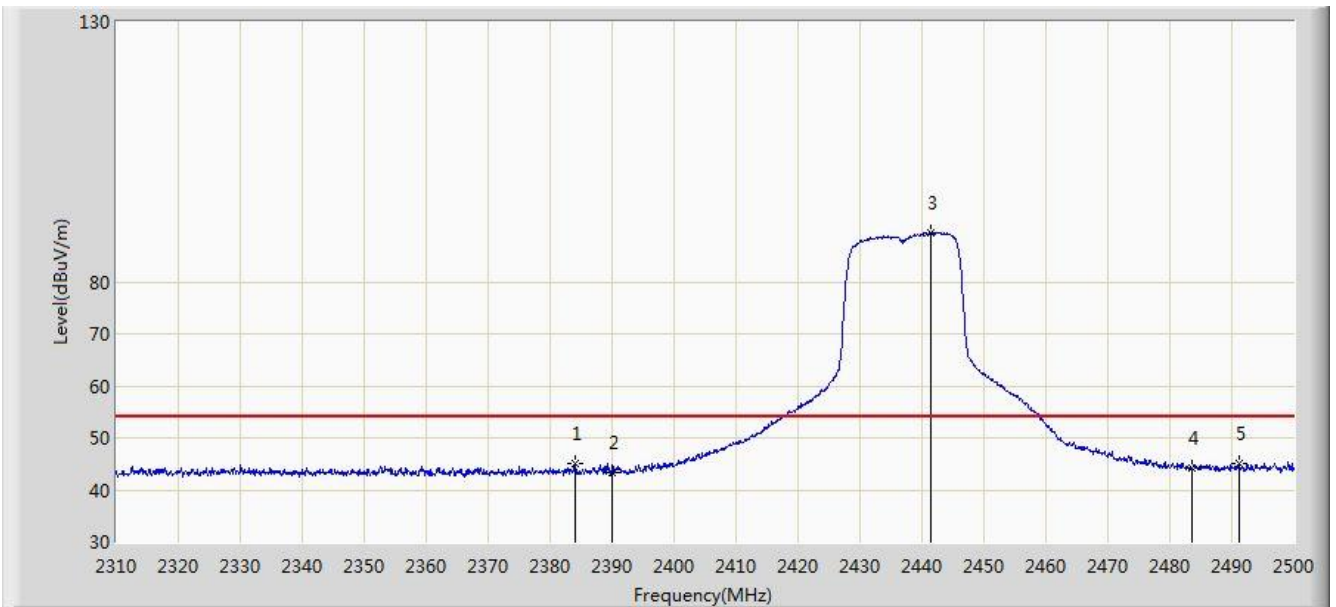


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2384.005	44.982	12.647	-9.018	54.000	32.335	AV
2			2390.000	43.220	10.893	-10.780	54.000	32.327	AV
3		*	2441.480	89.439	57.183	N/A	N/A	32.255	AV
4			2483.500	44.255	11.916	-9.745	54.000	32.340	AV
5			2491.165	45.045	12.676	-8.955	54.000	32.369	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/03/27 - 04:15
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: 802.11ac Dual Band Module	Power: DC 3.3V
Test Mode: Transmit by 802.11n-HT20 at Channel 2437MHz, Ant 0 + 1	

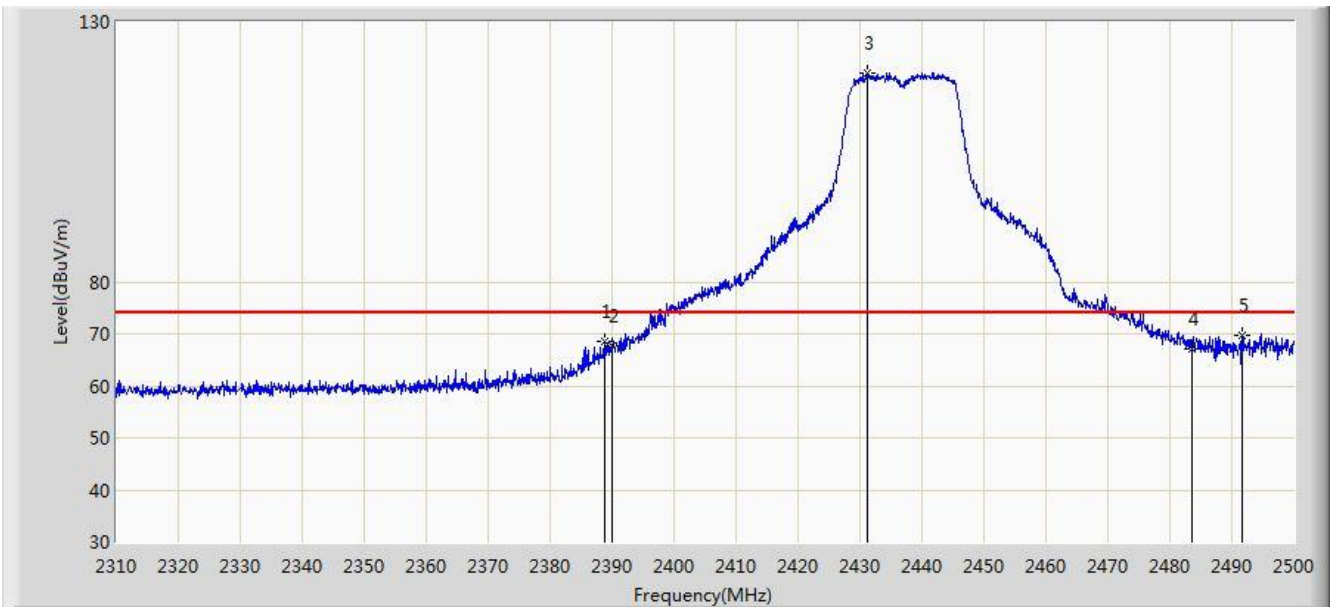


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2388.850	68.498	36.170	-5.502	74.000	32.329	PK
2			2390.000	67.775	35.448	-6.225	74.000	32.327	PK
3		*	2431.220	120.113	87.840	N/A	N/A	32.272	PK
4			2483.500	67.225	34.886	-6.775	74.000	32.340	PK
5			2491.735	69.849	37.478	-4.151	74.000	32.372	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/03/27 - 04:12
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: 802.11ac Dual Band Module	Power: DC 3.3V
Test Mode: Transmit by 802.11n-HT20 at Channel 2437MHz, Ant 0 + 1	

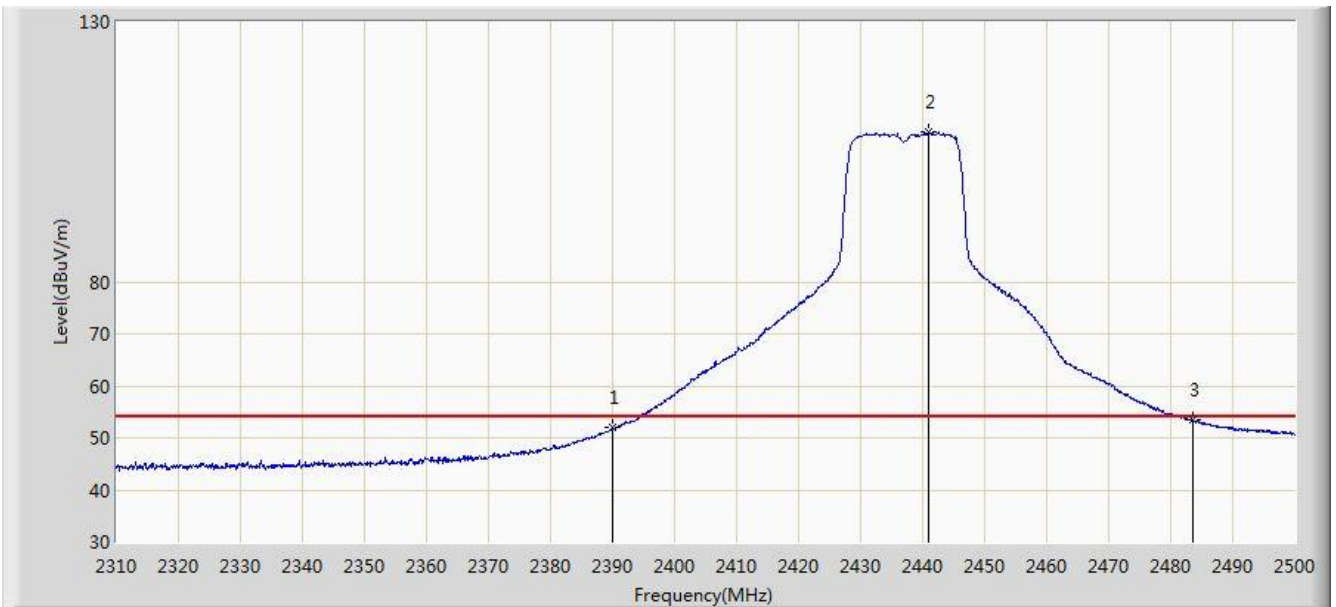


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	51.892	19.565	-2.108	54.000	32.327	AV
2		*	2440.910	108.717	76.461	N/A	N/A	32.257	AV
3			2483.500	53.493	21.154	-0.507	54.000	32.340	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/03/22 - 23:11
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: 802.11ac Dual Band Module	Power: DC 3.3V
Test Mode: Transmit by 802.11n-HT20 at Channel 2462MHz, Ant 0 + 1	

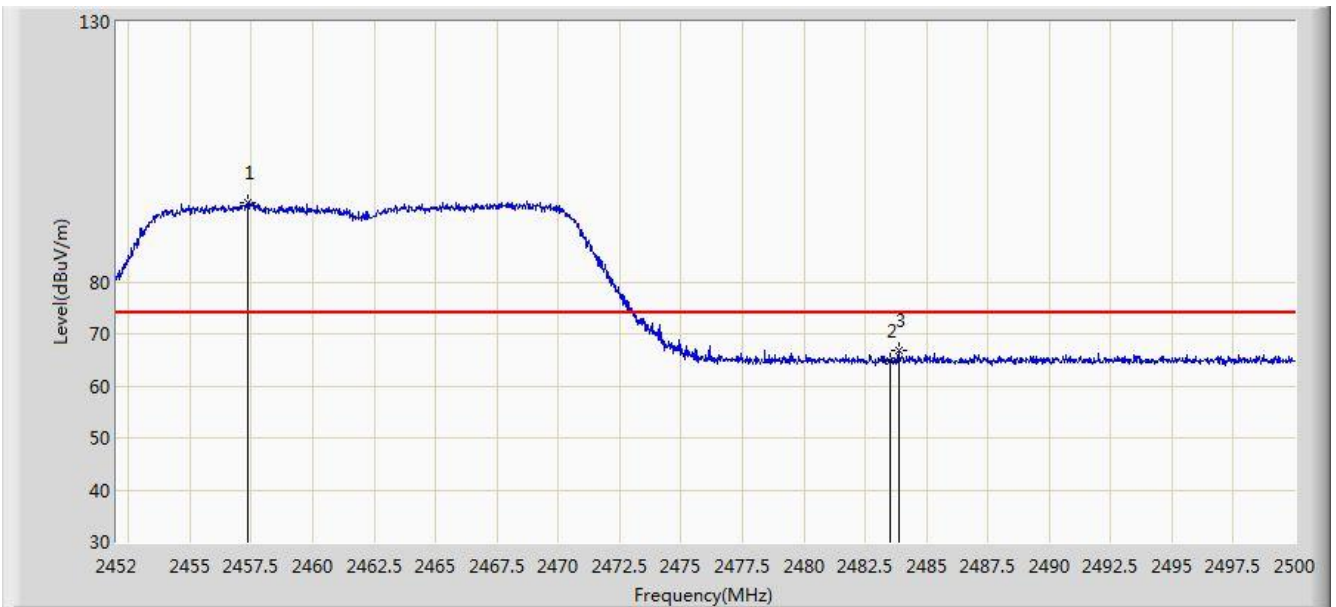


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2457.352	95.117	62.846	N/A	N/A	32.271	PK
2			2483.500	64.795	32.456	-9.205	74.000	32.340	PK
3			2483.872	66.678	34.337	-7.322	74.000	32.340	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/03/22 - 23:14
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: 802.11ac Dual Band Module	Power: DC 3.3V
Test Mode: Transmit by 802.11n-HT20 at Channel 2462MHz, Ant 0 + 1	

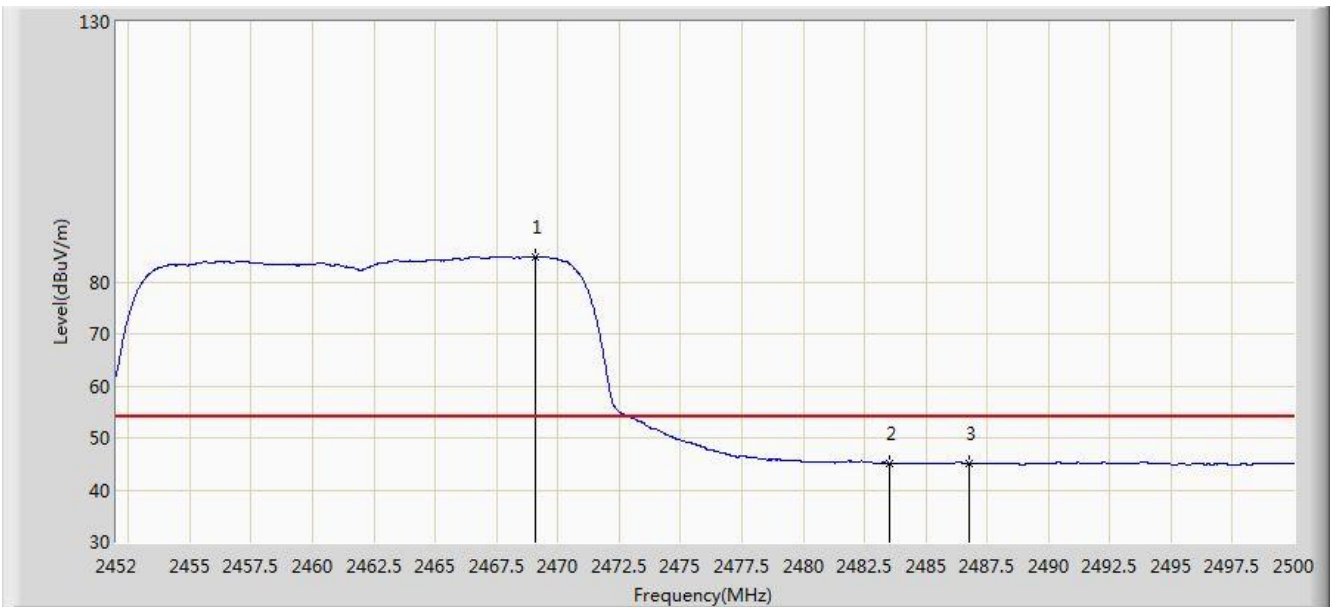


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2469.088	84.828	52.531	N/A	N/A	32.297	AV
2			2483.500	45.076	12.737	-8.924	54.000	32.340	AV
3			2486.752	45.147	12.795	-8.853	54.000	32.351	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/03/22 - 23:03
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: 802.11ac Dual Band Module	Power: DC 3.3V
Test Mode: Transmit by 802.11n-HT20 at Channel 2462MHz, Ant 0 + 1	

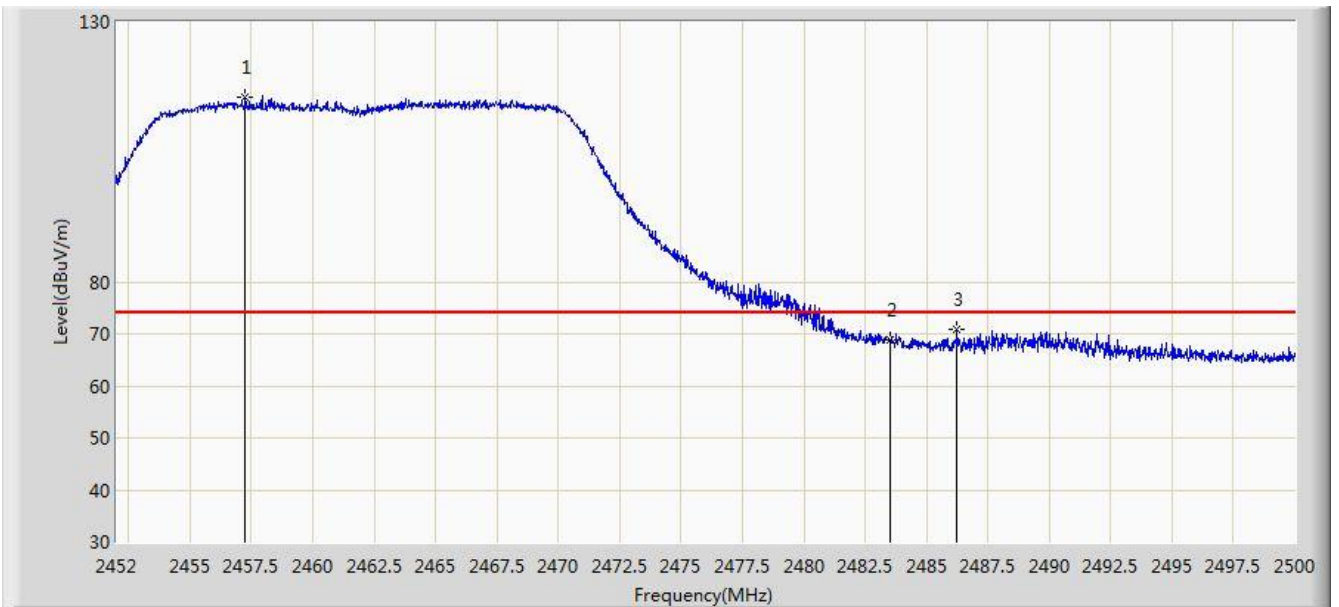


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2457.256	115.626	83.355	N/A	N/A	32.271	PK
2			2483.500	68.886	36.547	-5.114	74.000	32.340	PK
3			2486.248	70.760	38.410	-3.240	74.000	32.350	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/03/22 - 23:06
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: 802.11ac Dual Band Module	Power: DC 3.3V
Test Mode: Transmit by 802.11n-HT20 at Channel 2462MHz, Ant 0 + 1	

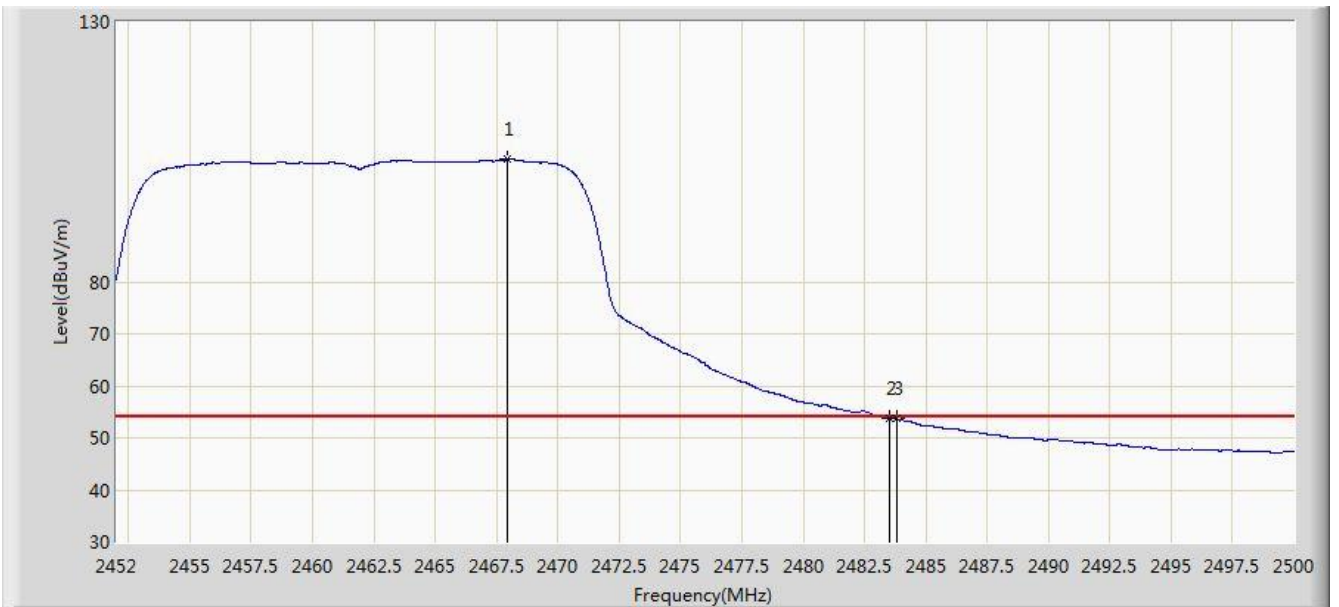


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2467.964	103.572	71.278	N/A	N/A	32.294	AV
2			2483.500	53.632	21.293	-0.368	54.000	32.340	AV
3			2483.800	53.665	21.325	-0.335	54.000	32.340	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/03/22 - 23:27
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: 802.11ac Dual Band Module	Power: DC 3.3V
Test Mode: Transmit by 802.11n-HT40 at Channel 2422MHz, Ant 0 + 1	

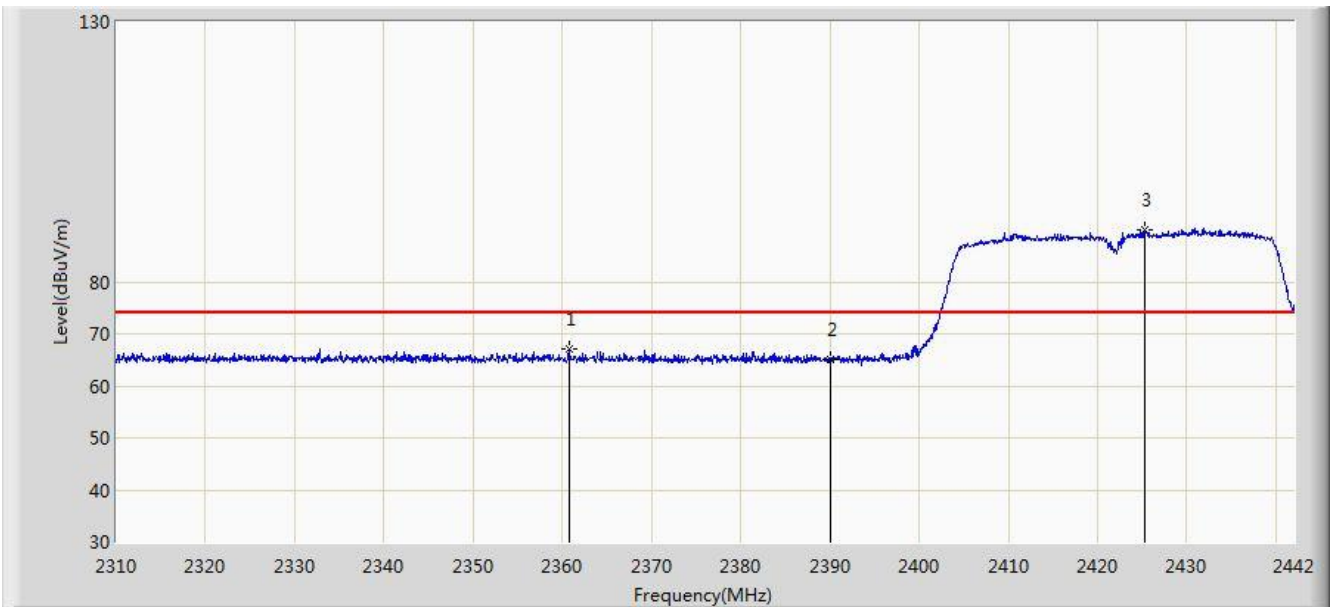


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2360.754	67.038	34.663	-6.962	74.000	32.376	PK
2			2390.000	65.161	32.834	-8.839	74.000	32.327	PK
3		*	2425.302	90.124	57.845	N/A	N/A	32.279	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/03/22 - 23:31
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: 802.11ac Dual Band Module	Power: DC 3.3V
Test Mode: Transmit by 802.11n-HT40 at Channel 2422MHz, Ant 0 + 1	

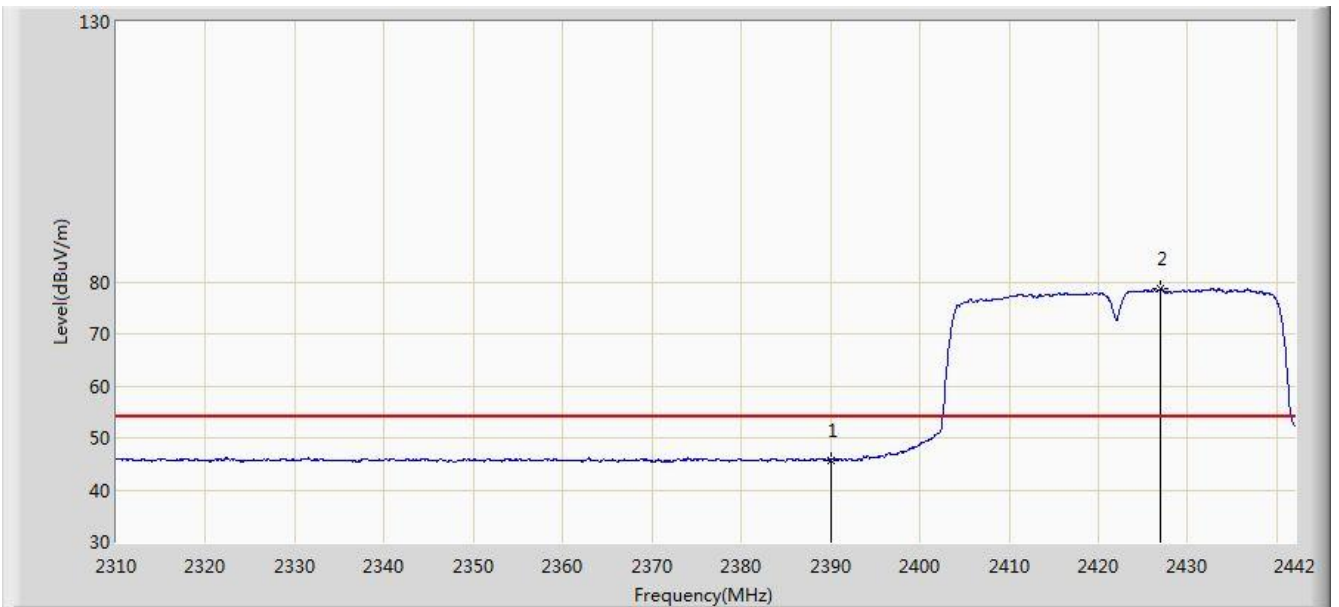


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	45.755	13.428	-8.245	54.000	32.327	AV
2		*	2426.886	78.607	46.329	N/A	N/A	32.279	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

aSite: AC1	Time: 2018/03/22 - 23:24
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: 802.11ac Dual Band Module	Power: DC 3.3V
Test Mode: Transmit by 802.11n-HT40 at Channel 2422MHz, Ant 0 + 1	

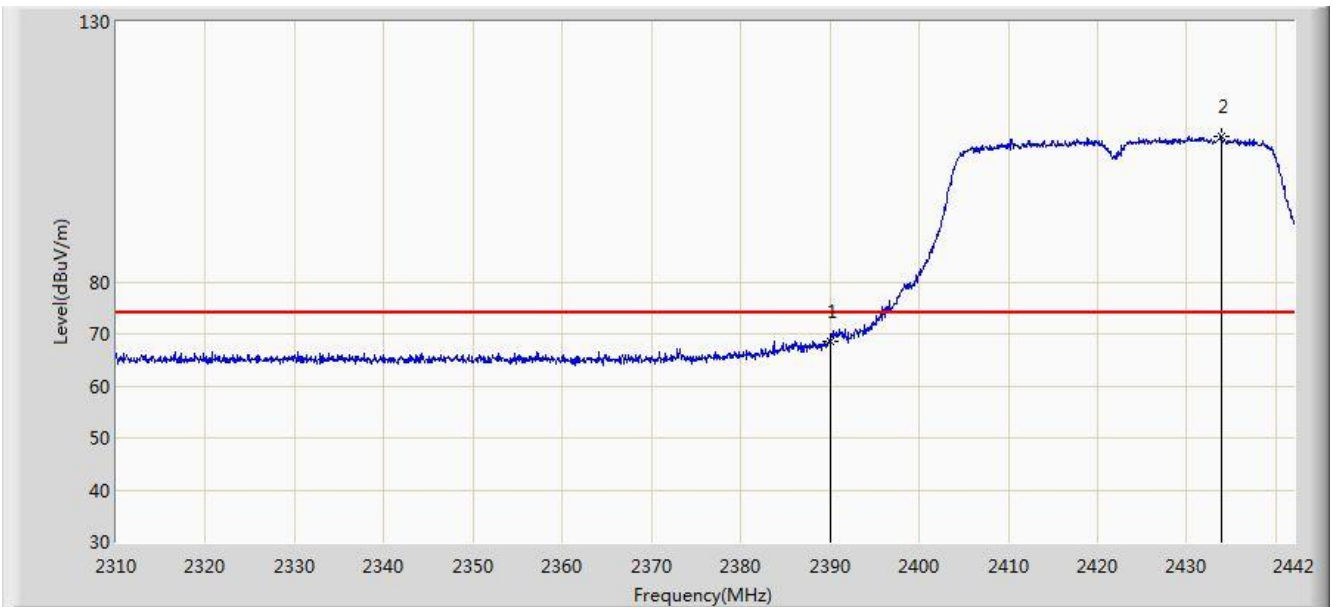


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	68.681	36.354	-5.319	74.000	32.327	PK
2		*	2433.816	107.875	75.607	N/A	N/A	32.268	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/03/22 - 23:23
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: 802.11ac Dual Band Module	Power: DC 3.3V
Test Mode: Transmit by 802.11n-HT40 at Channel 2422MHz, Ant 0 + 1	

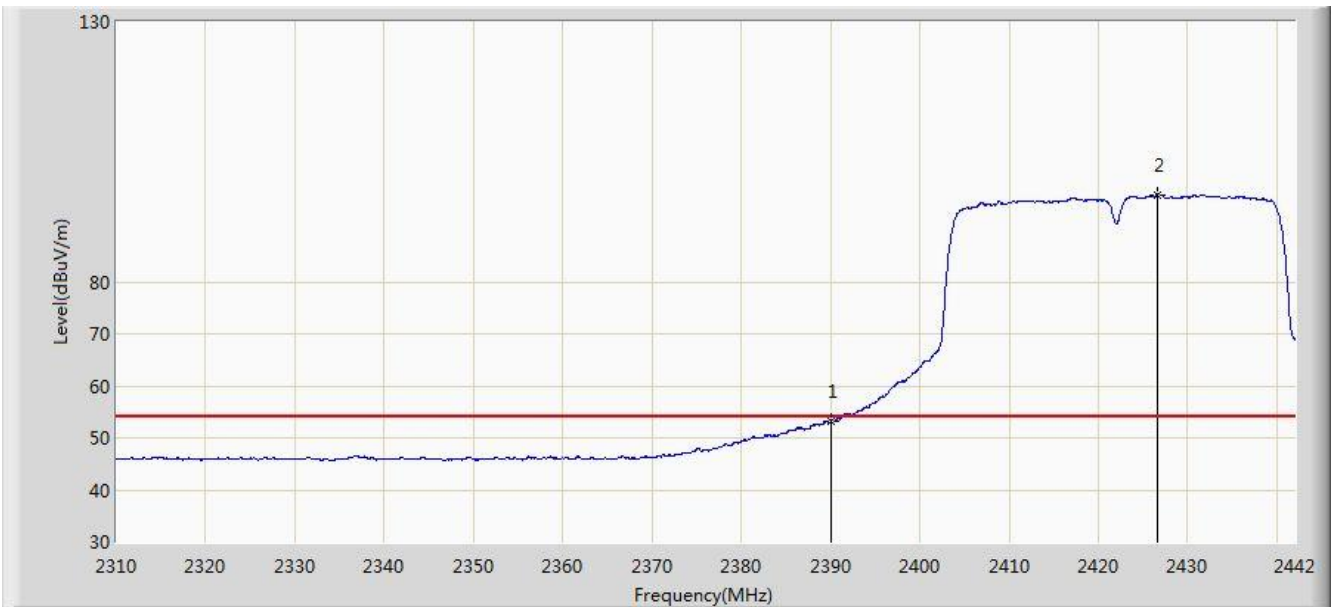


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	53.158	20.831	-0.842	54.000	32.327	AV
2		*	2426.556	96.705	64.426	N/A	N/A	32.278	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/03/27 - 04:28
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: 802.11ac Dual Band Module	Power: DC 3.3V
Test Mode: Transmit by 802.11n-HT40 at Channel 2437MHz, Ant 0 + 1	

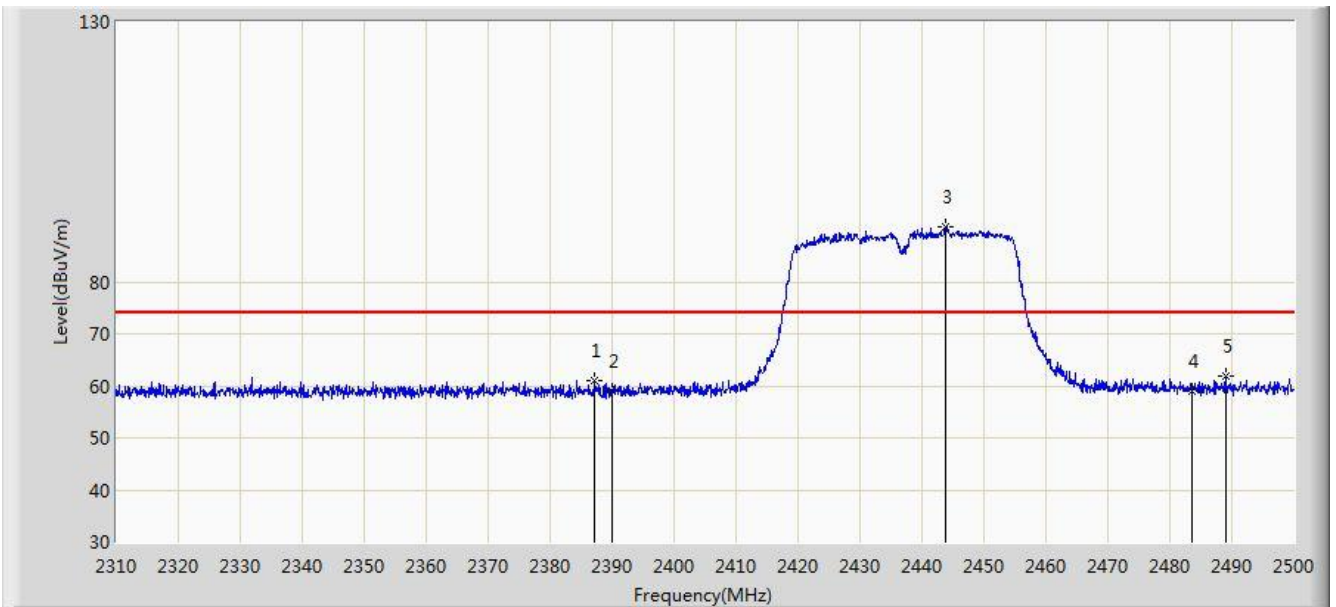


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2387.235	61.029	28.698	-12.971	74.000	32.331	PK
2			2390.000	59.064	26.737	-14.936	74.000	32.327	PK
3		*	2443.855	90.606	58.354	N/A	N/A	32.251	PK
4			2483.500	58.878	26.539	-15.122	74.000	32.340	PK
5			2488.980	61.975	29.614	-12.025	74.000	32.361	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/03/27 - 04:30
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: 802.11ac Dual Band Module	Power: DC 3.3V
Test Mode: Transmit by 802.11n-HT40 at Channel 2437MHz, Ant 0 + 1	

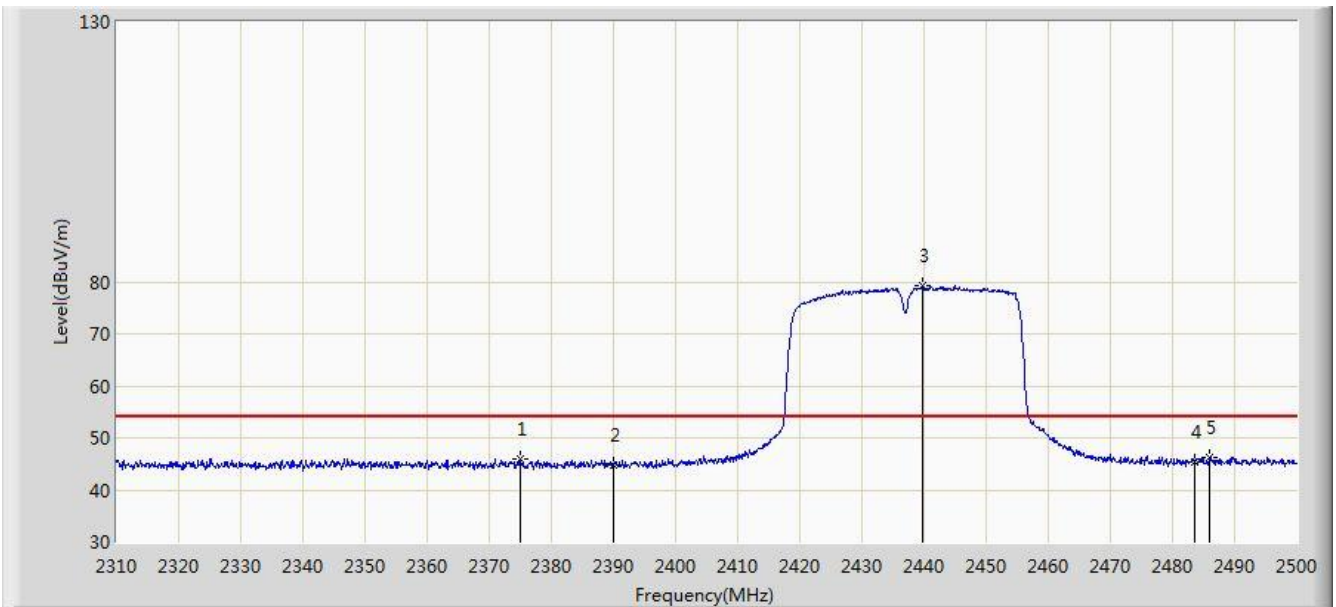


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2374.885	45.917	13.568	-8.083	54.000	32.349	AV
2			2390.000	44.655	12.328	-9.345	54.000	32.327	AV
3		*	2439.770	79.144	46.886	N/A	N/A	32.258	AV
4			2483.500	45.487	13.148	-8.513	54.000	32.340	AV
5			2486.035	46.310	13.961	-7.690	54.000	32.349	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/03/27 - 04:27
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: 802.11ac Dual Band Module	Power: DC 3.3V
Test Mode: Transmit by 802.11n-HT40 at Channel 2437MHz, Ant 0 + 1	

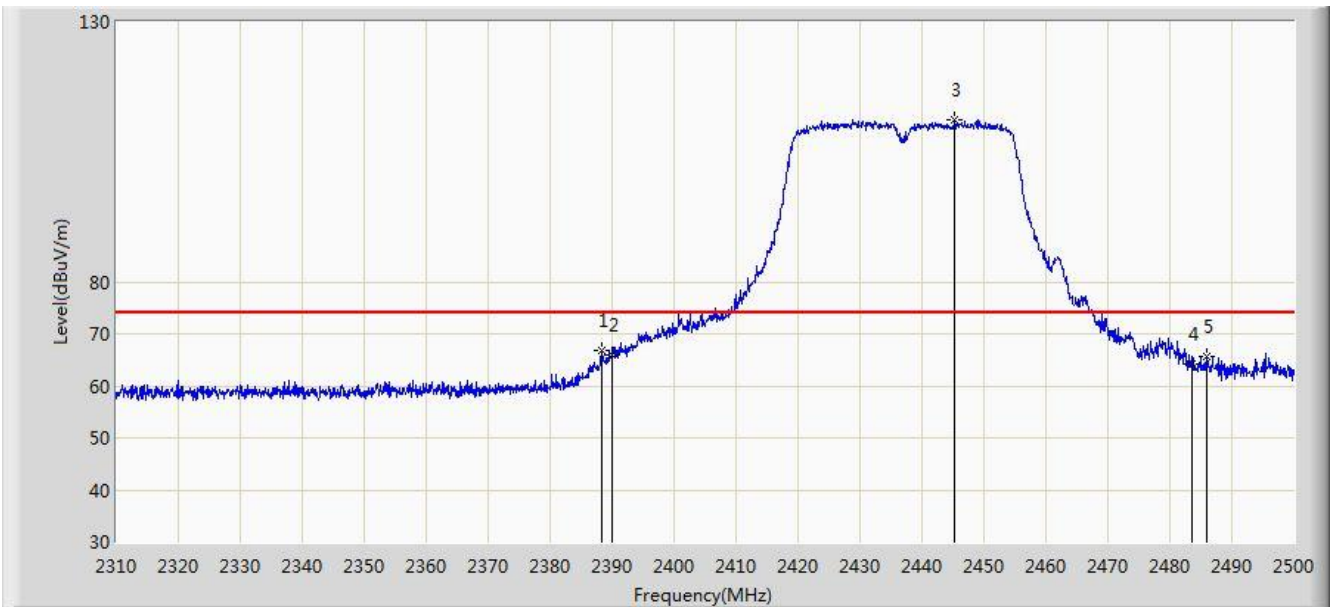


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2388.280	66.779	34.450	-7.221	74.000	32.329	PK
2			2390.000	65.982	33.655	-8.018	74.000	32.327	PK
3		*	2445.280	111.068	78.819	N/A	N/A	32.249	PK
4			2483.500	64.164	31.825	-9.836	74.000	32.340	PK
5			2485.845	65.576	33.228	-8.424	74.000	32.348	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/03/27 - 04:25
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: 802.11ac Dual Band Module	Power: DC 3.3V
Test Mode: Transmit by 802.11n-HT40 at Channel 2437MHz, Ant 0 + 1	

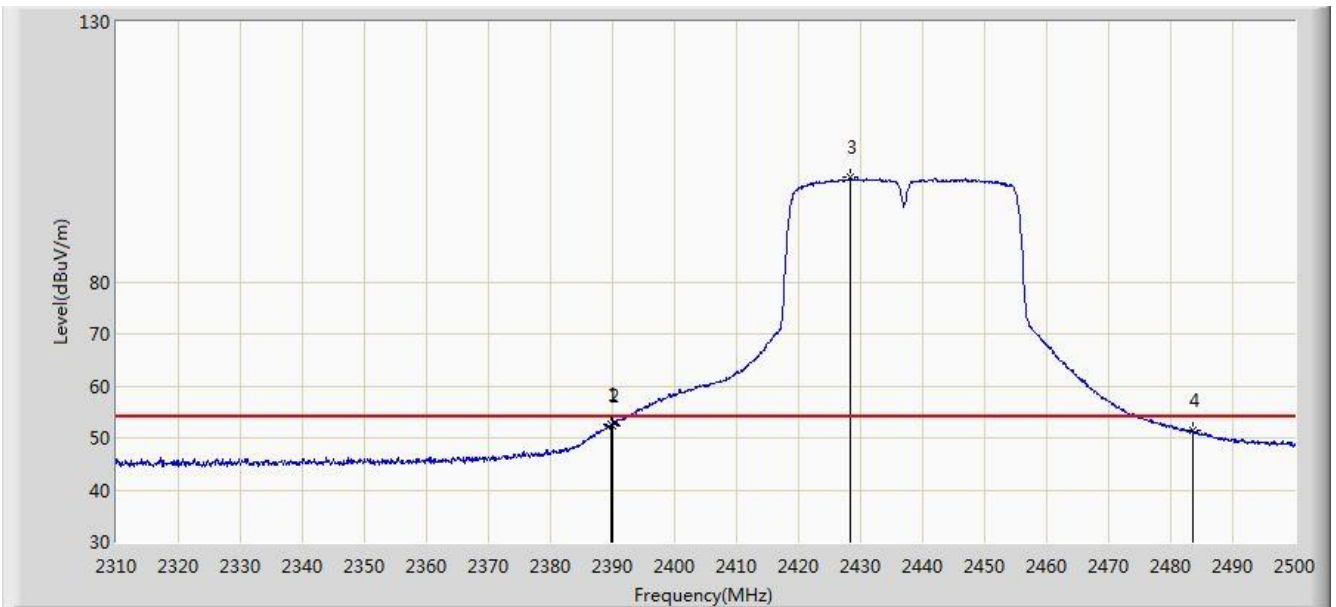


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.705	52.566	20.239	-1.434	54.000	32.328	AV
2			2390.000	52.458	20.131	-1.542	54.000	32.327	AV
3		*	2428.275	100.003	67.725	N/A	N/A	32.277	AV
4			2483.500	51.401	19.062	-2.599	54.000	32.340	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/03/22 - 23:51
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: 802.11ac Dual Band Module	Power: DC 3.3V
Test Mode: Transmit by 802.11n-HT40 at Channel 2452MHz, Ant 0 + 1	

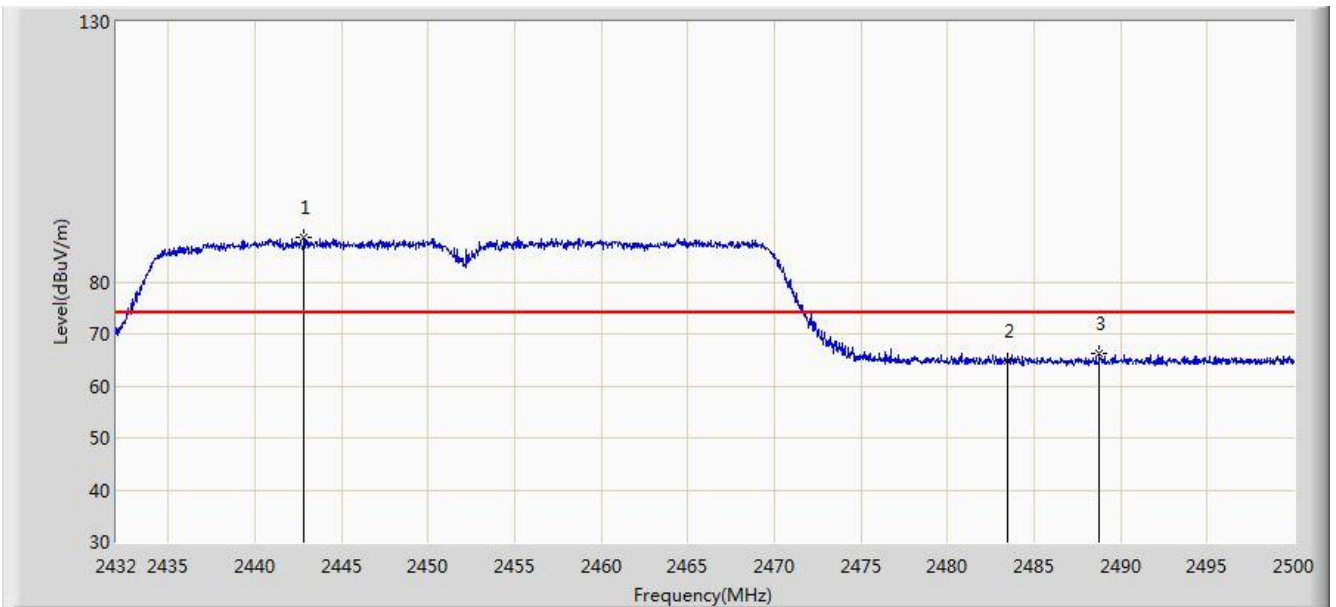


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2442.846	88.620	56.367	N/A	N/A	32.253	PK
2			2483.500	64.833	32.494	-9.167	74.000	32.340	PK
3			2488.780	66.284	33.924	-7.716	74.000	32.360	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/03/22 - 23:54
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: 802.11ac Dual Band Module	Power: DC 3.3V
Test Mode: Transmit by 802.11n-HT40 at Channel 2452MHz, Ant 0 + 1	

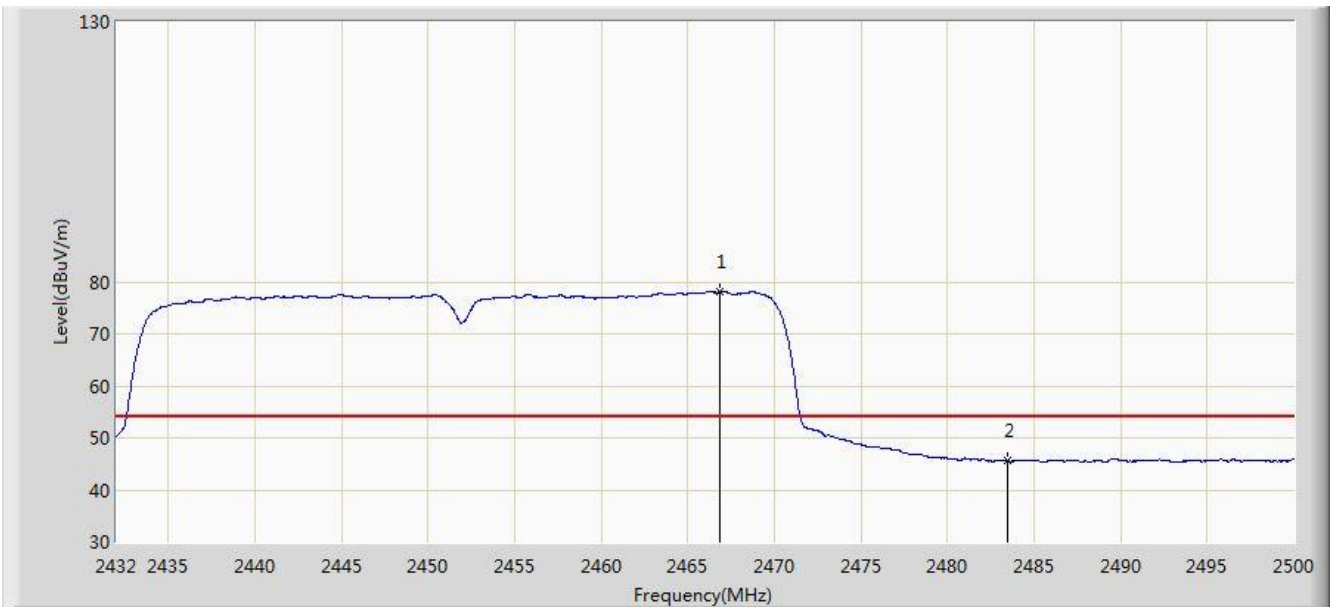


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
a		*	2466.884	78.035	45.744	N/A	N/A	32.291	AV
2			2483.500	45.559	13.220	-8.441	54.000	32.340	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/03/22 - 23:48
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: 802.11ac Dual Band Module	Power: DC 3.3V
Test Mode: Transmit by 802.11n-HT40 at Channel 2452MHz, Ant 0 + 1	

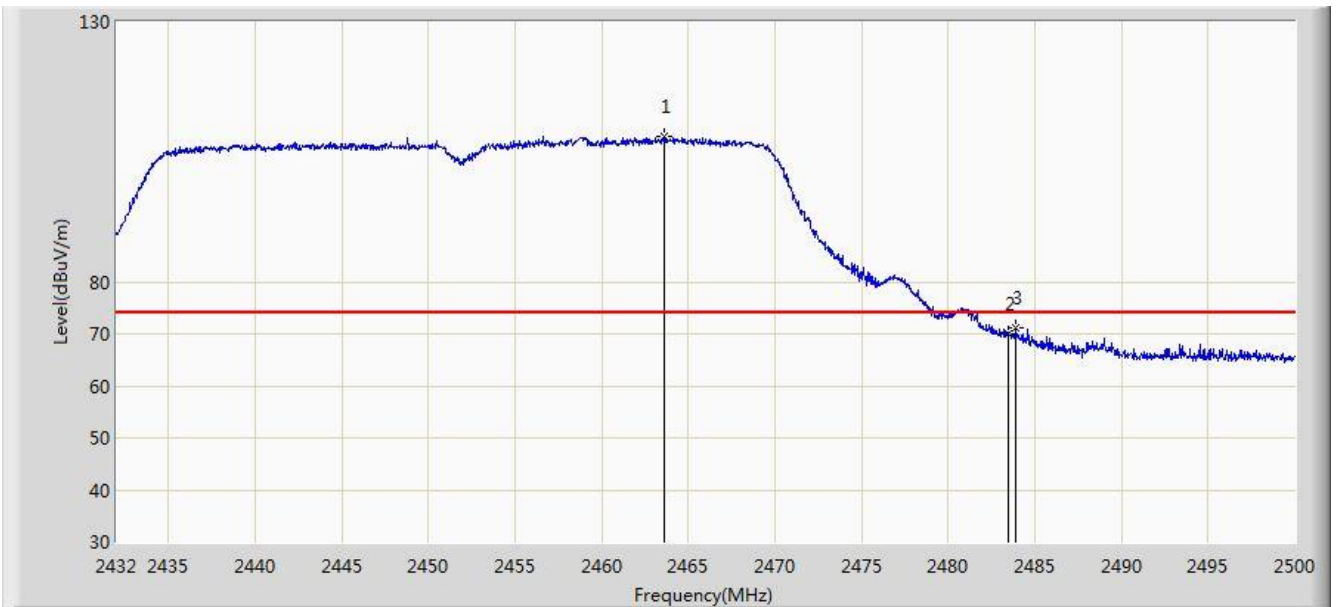


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2463.654	107.984	75.701	N/A	N/A	32.283	PK
2			2483.500	70.120	37.781	-3.880	74.000	32.340	PK
3			2483.918	71.156	38.815	-2.844	74.000	32.340	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/03/22 - 23:47
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: 802.11ac Dual Band Module	Power: DC 3.3V
Test Mode: Transmit by 802.11n-HT40 at Channel 2452MHz, Ant 0 + 1	

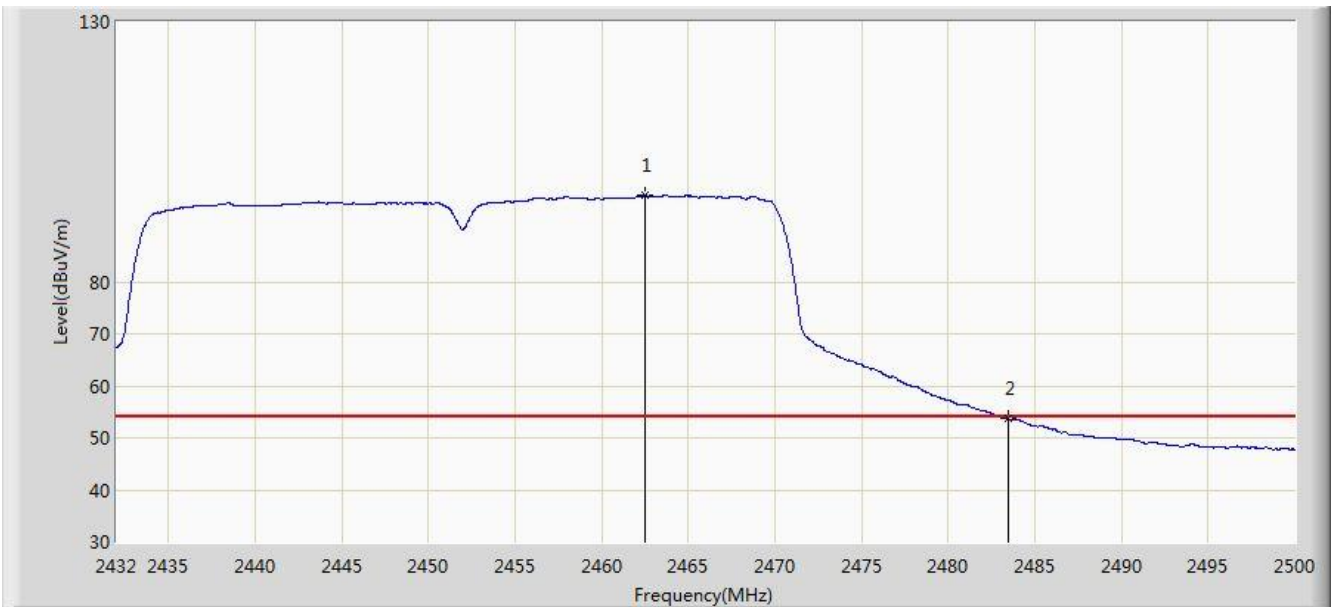


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2462.498	96.568	64.287	N/A	N/A	32.281	AV
2			2483.500	53.657	21.318	-0.343	54.000	32.340	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/03/27 - 02:39
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: 802.11ac Dual Band Module	Power: DC 3.3V
Test Mode: Transmit by 802.11n-HT20 at Channel 2412MHz, Ant 0 + 1 + 2	

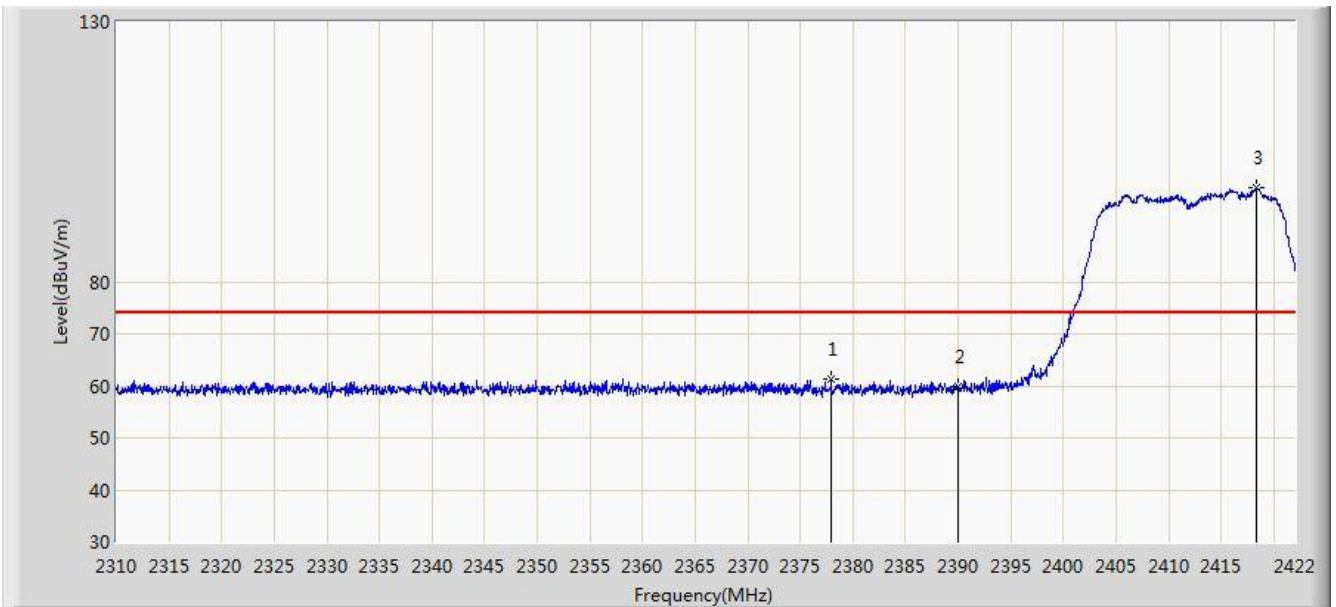


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2377.928	61.179	28.836	-12.821	74.000	32.343	PK
2			2390.000	59.892	27.565	-14.108	74.000	32.327	PK
3		*	2418.360	97.994	65.712	N/A	N/A	32.282	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/03/27 - 02:42
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: 802.11ac Dual Band Module	Power: DC 3.3V
Test Mode: Transmit by 802.11n-HT20 at Channel 2412MHz, Ant 0 + 1 + 2	

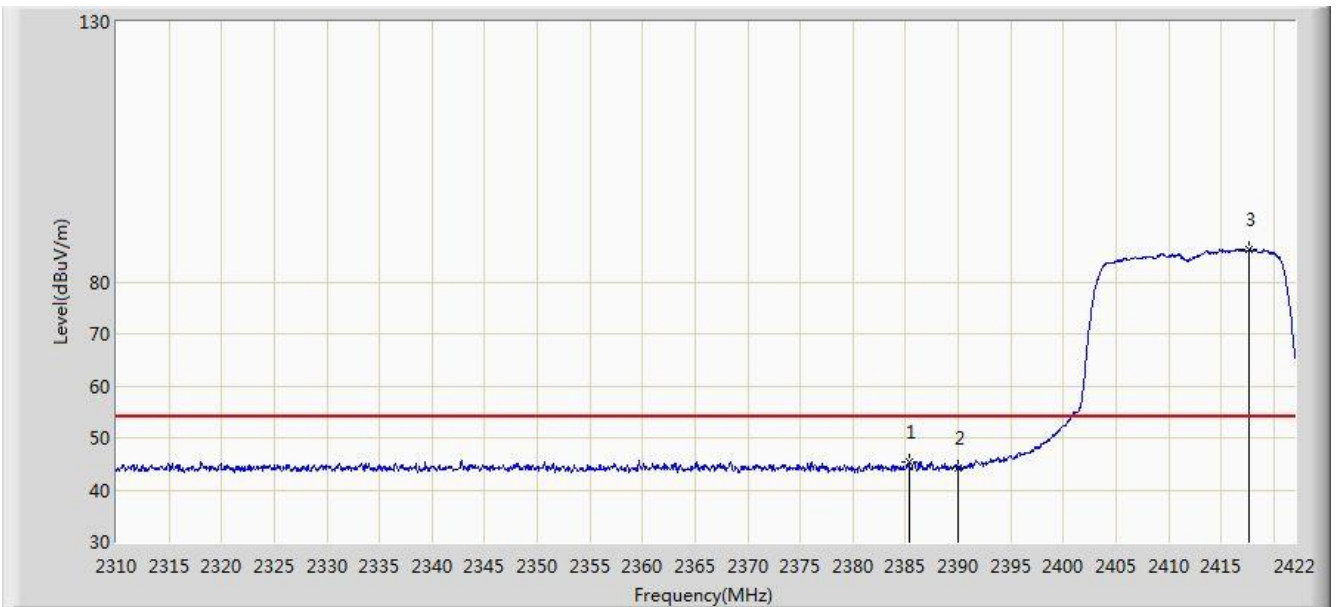


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2385.320	45.451	13.118	-8.549	54.000	32.333	AV
2			2390.000	44.291	11.964	-9.709	54.000	32.327	AV
3		*	2417.688	86.245	53.963	N/A	N/A	32.282	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/03/27 - 02:38
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: 802.11ac Dual Band Module	Power: DC 3.3V
Test Mode: Transmit by 802.11n-HT20 at Channel 2412MHz, Ant 0 + 1 + 2	

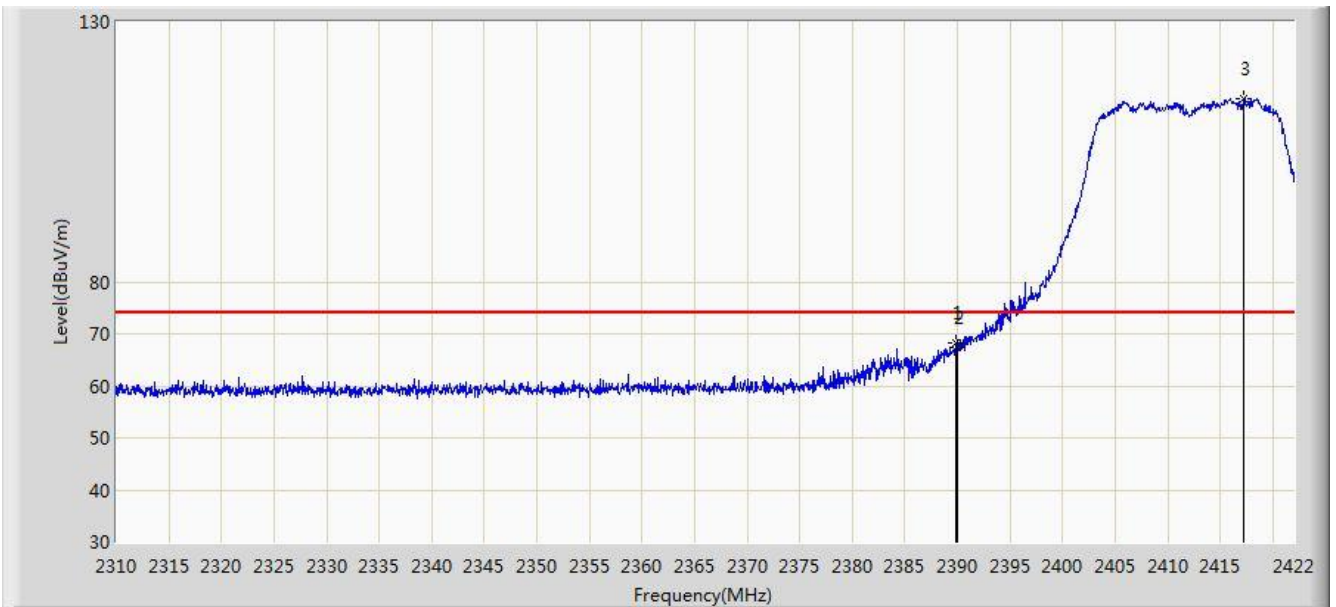


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.856	68.124	35.797	-5.876	74.000	32.327	PK
2			2390.000	67.453	35.126	-6.547	74.000	32.327	PK
3		*	2417.184	115.268	82.985	N/A	N/A	32.283	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/03/27 - 02:33
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: 802.11ac Dual Band Module	Power: DC 3.3V
Test Mode: Transmit by 802.11n-HT20 at Channel 2412MHz, Ant 0 + 1 + 2	

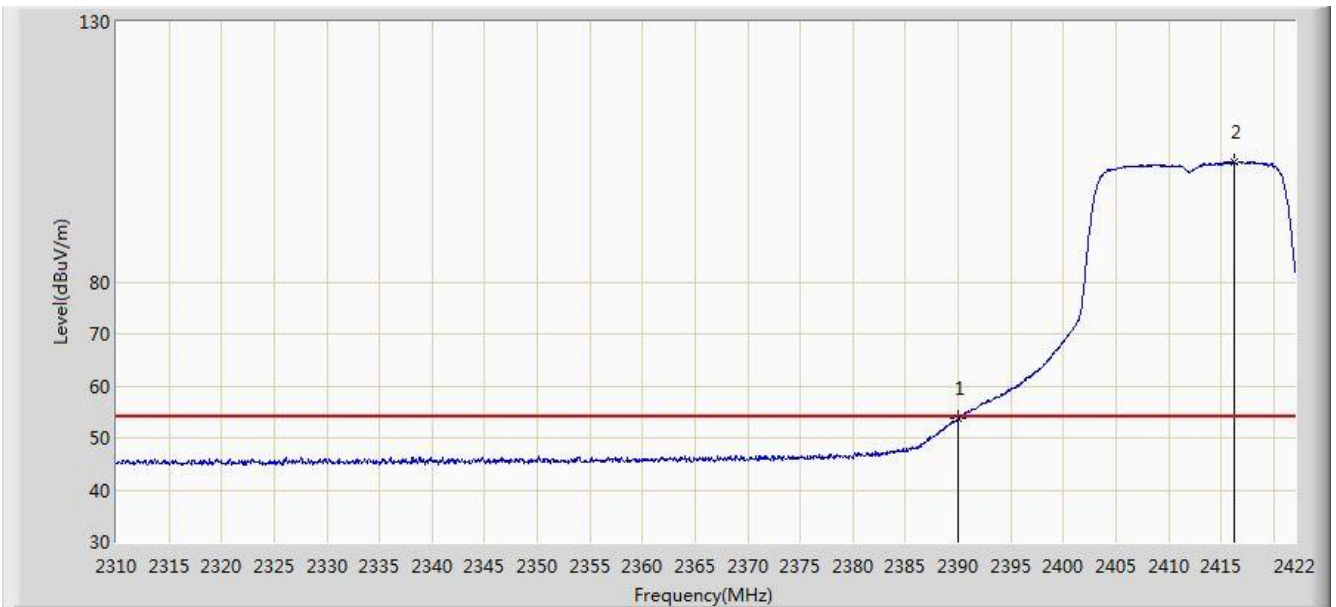


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	53.694	21.367	-0.306	54.000	32.327	AV
2		*	2416.176	103.054	70.771	N/A	N/A	32.283	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/03/27 - 03:38
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: 802.11ac Dual Band Module	Power: DC 3.3V
Test Mode: Transmit by 802.11n-HT20 at Channel 2437MHz, Ant 0 + 1 + 2	

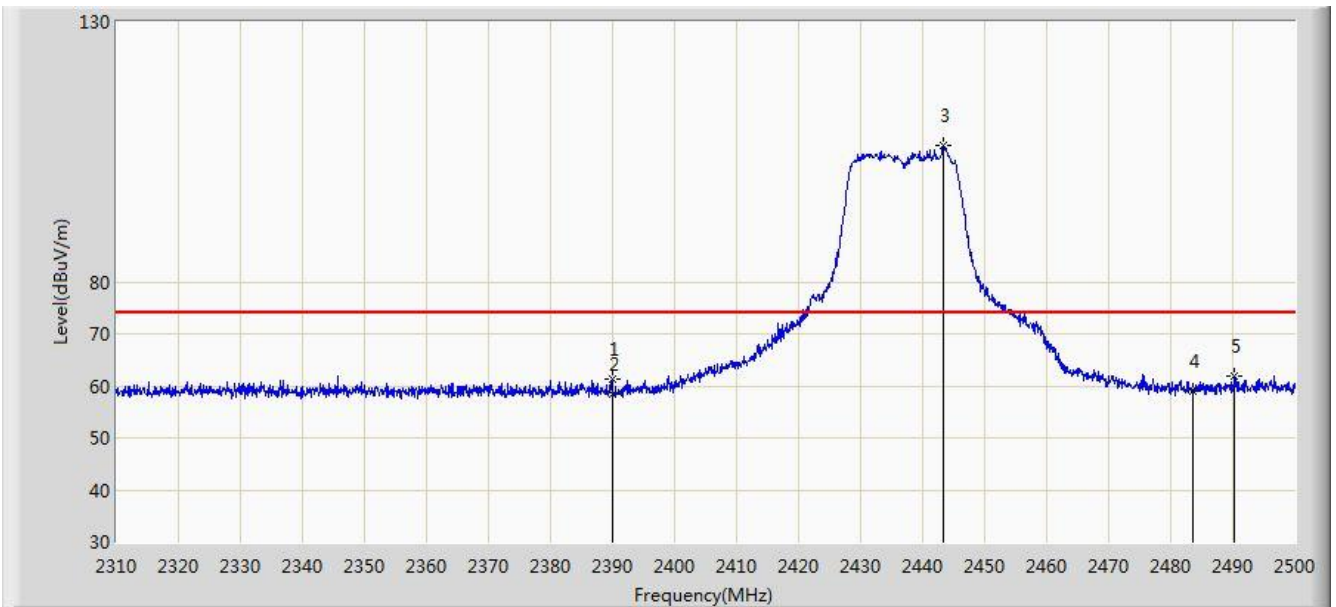


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.895	61.388	29.061	-12.612	74.000	32.327	PK
2			2390.000	58.464	26.137	-15.536	74.000	32.327	PK
3		*	2443.380	106.307	74.055	N/A	N/A	32.253	PK
4			2483.500	58.857	26.518	-15.143	74.000	32.340	PK
5			2490.215	61.748	29.382	-12.252	74.000	32.366	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/03/27 - 03:40
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: 802.11ac Dual Band Module	Power: DC 3.3V
Test Mode: Transmit by 802.11n-HT20 at Channel 2437MHz, Ant 0 + 1 + 2	

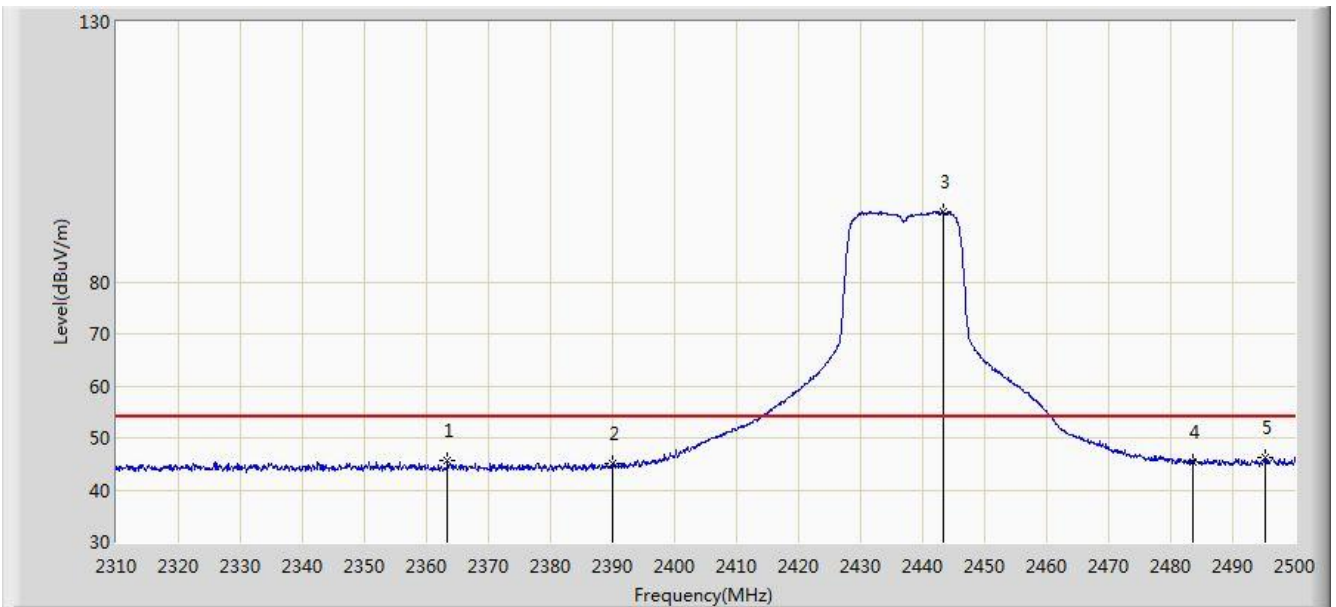


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2363.390	45.542	13.172	-8.458	54.000	32.370	AV
2			2390.000	44.939	12.612	-9.061	54.000	32.327	AV
3		*	2443.285	93.600	61.347	N/A	N/A	32.253	AV
4			2483.500	45.466	13.127	-8.534	54.000	32.340	AV
5			2495.250	46.314	13.929	-7.686	54.000	32.385	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/03/27 - 03:37
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: 802.11ac Dual Band Module	Power: DC 3.3V
Test Mode: Transmit by 802.11n-HT20 at Channel 2437MHz, Ant 0 + 1 + 2	

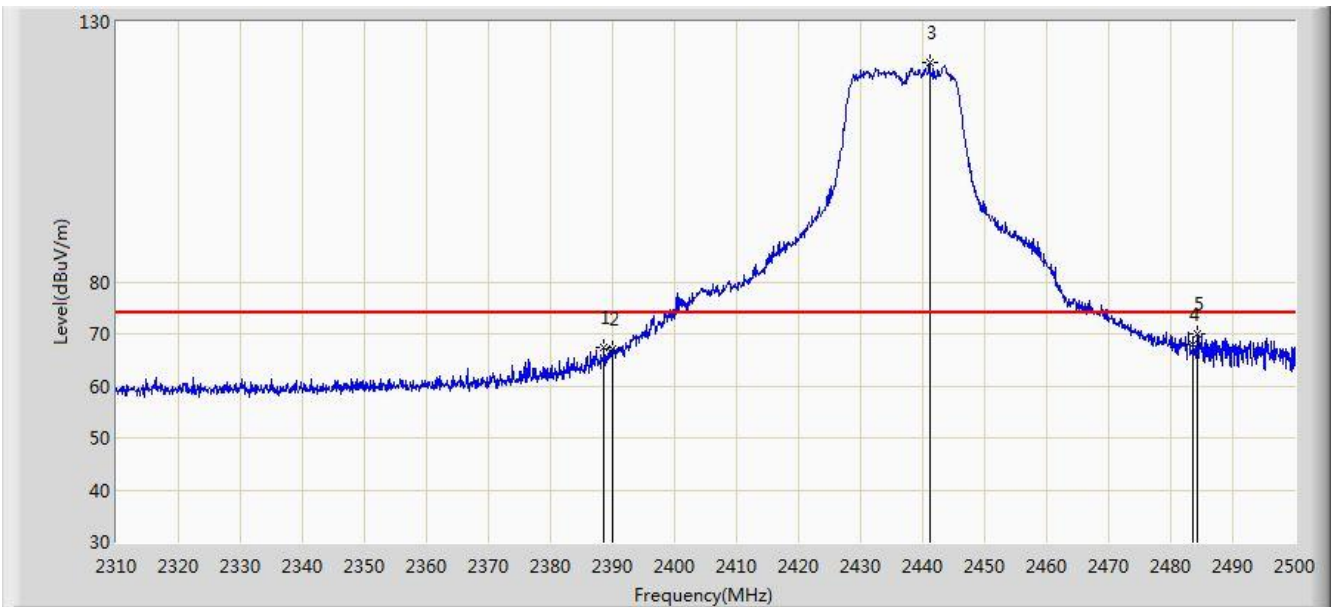


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2388.660	67.354	35.025	-6.646	74.000	32.328	PK
2			2390.000	66.998	34.671	-7.002	74.000	32.327	PK
3		*	2441.100	122.041	89.785	N/A	N/A	32.256	PK
4			2483.500	67.828	35.489	-6.172	74.000	32.340	PK
5			2484.230	69.942	37.600	-4.058	74.000	32.342	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/03/27 - 03:35
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: 802.11ac Dual Band Module	Power: DC 3.3V
Test Mode: Transmit by 802.11n-HT20 at Channel 2437MHz, Ant 0 + 1 + 2	

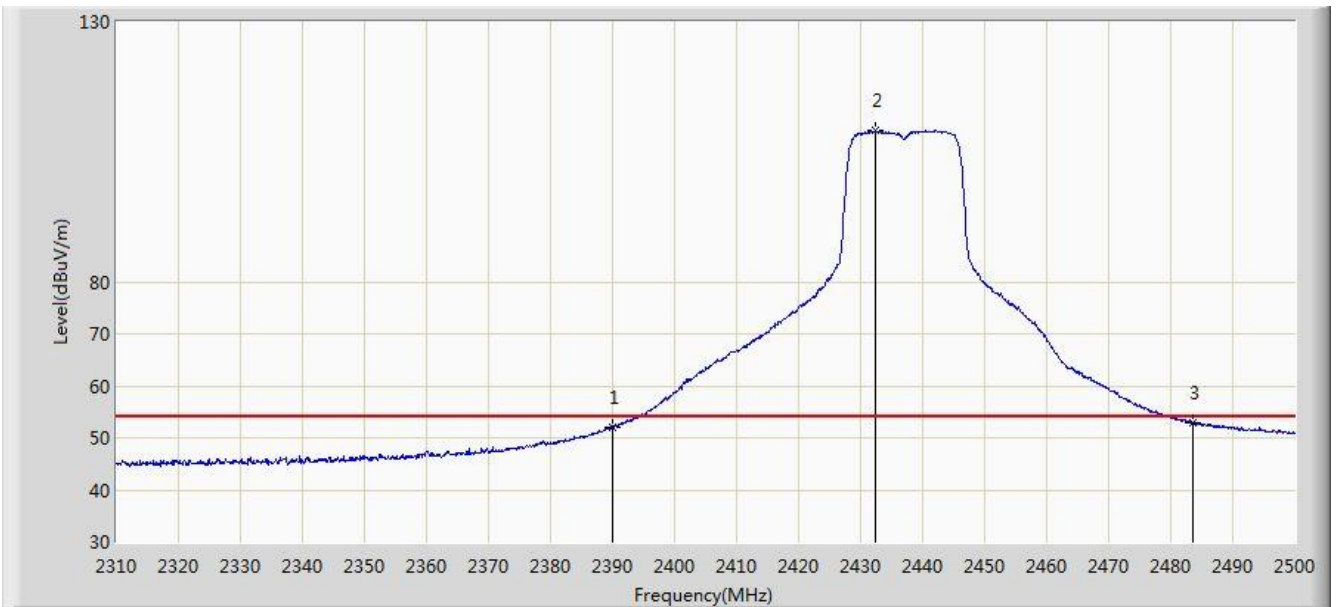


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	52.128	19.801	-1.872	54.000	32.327	AV
2	X	*	2432.265	109.053	76.782	N/A	N/A	32.271	AV
3			2483.500	52.973	20.634	-1.027	54.000	32.340	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/03/27 - 02:55
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: 802.11ac Dual Band Module	Power: DC 3.3V
Test Mode: Transmit by 802.11n-HT20 at Channel 2462MHz, Ant 0 + 1 + 2	

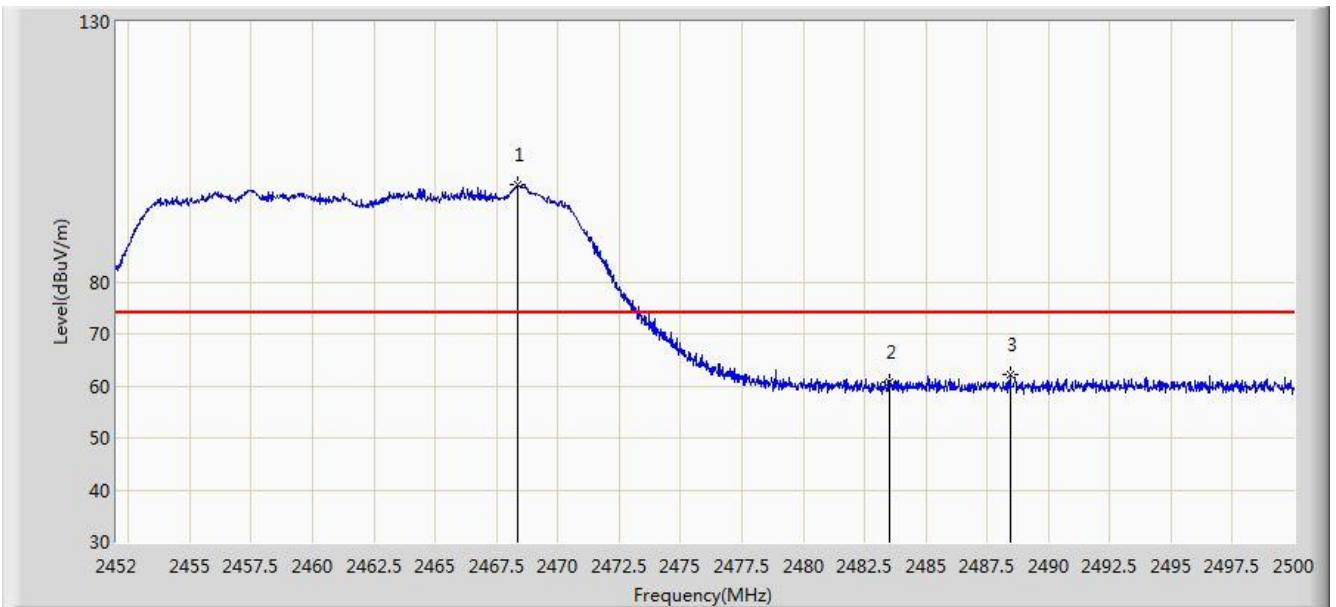


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2468.344	98.602	66.307	N/A	N/A	32.294	PK
2			2483.500	60.654	28.315	-13.346	74.000	32.340	PK
3			2488.432	62.226	29.867	-11.774	74.000	32.359	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/03/27 - 03:00
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: 802.11ac Dual Band Module	Power: DC 3.3V
Test Mode: Transmit by 802.11n-HT20 at Channel 2462MHz, Ant 0 + 1 + 2	

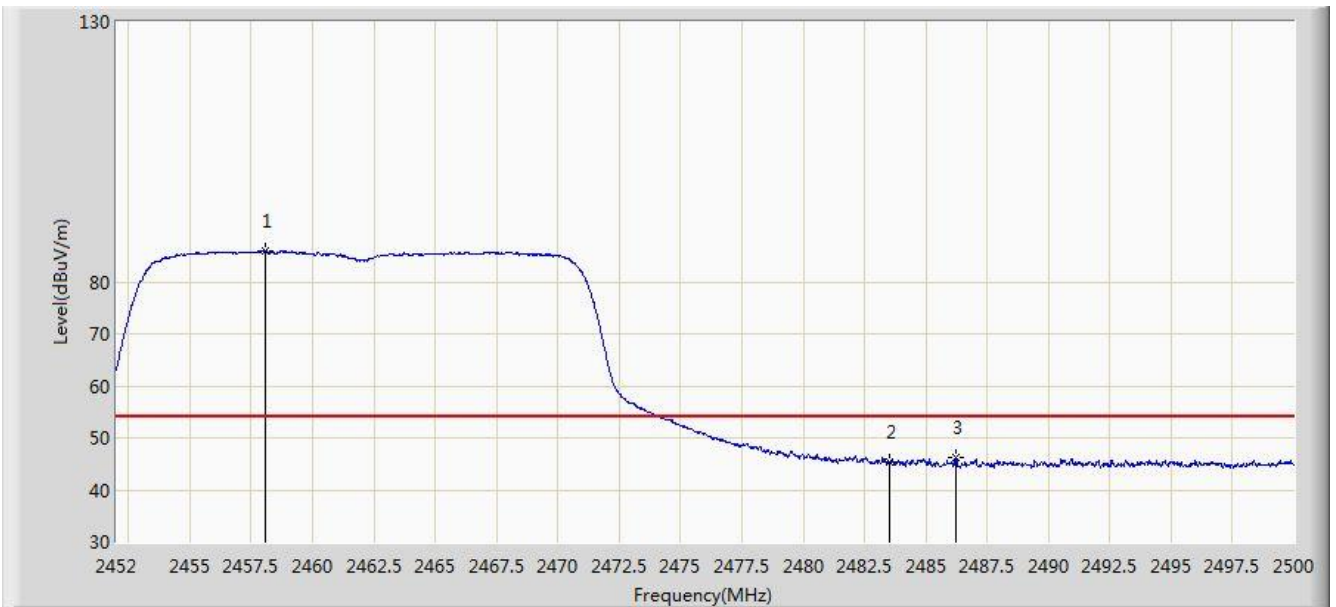


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2458.096	85.976	53.704	N/A	N/A	32.273	AV
2			2483.500	45.357	13.018	-8.643	54.000	32.340	AV
3			2486.248	46.124	13.774	-7.876	54.000	32.350	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/03/27 - 02:53
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: 802.11ac Dual Band Module	Power: DC 3.3V
Test Mode: Transmit by 802.11n-HT20 at Channel 2462MHz, Ant 0 + 1 + 2	

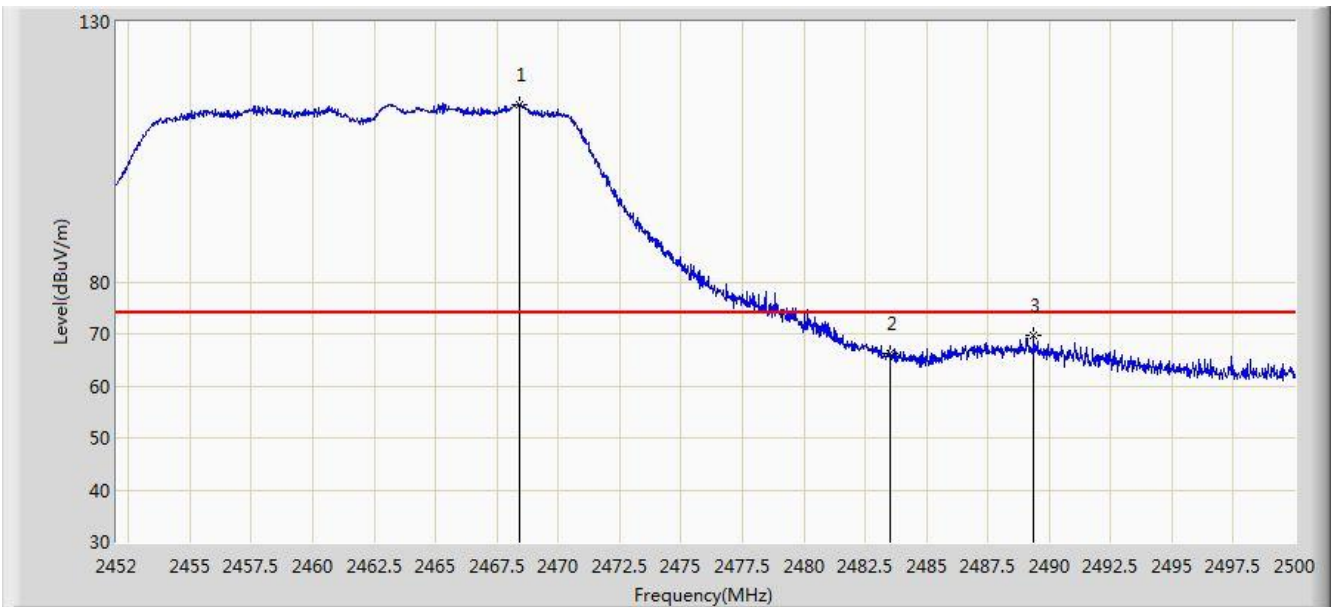


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2468.416	114.043	81.748	N/A	N/A	32.295	PK
2			2483.500	66.177	33.838	-7.823	74.000	32.340	PK
3			2489.368	69.764	37.402	-4.236	74.000	32.362	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/03/27 - 02:51
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: 802.11ac Dual Band Module	Power: DC 3.3V
Test Mode: Transmit by 802.11n-HT20 at Channel 2462MHz, Ant 0 + 1 + 2	

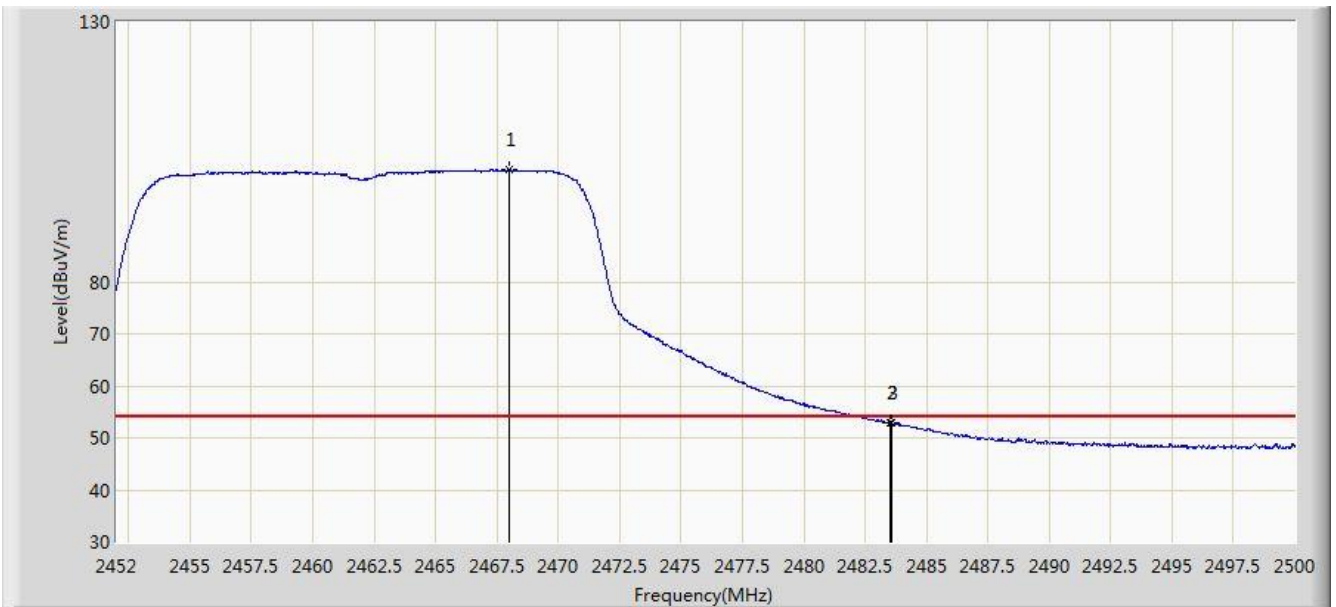


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2467.984	101.589	69.295	N/A	N/A	32.294	AV
2			2483.500	52.891	20.552	-1.109	54.000	32.340	AV
3			2483.560	52.929	20.590	-1.071	54.000	32.340	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/03/27 - 03:11
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: 802.11ac Dual Band Module	Power: DC 3.3V
Test Mode: Transmit by 802.11n-HT40 at Channel 2422MHz, Ant 0 + 1 + 2	

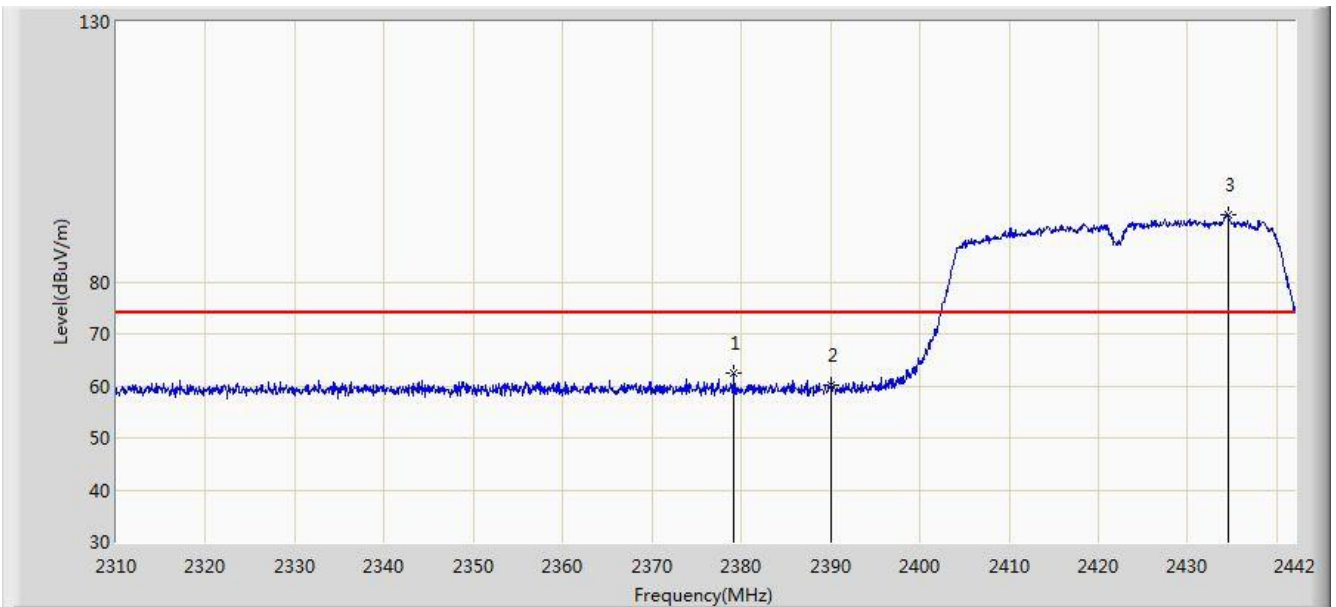


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2379.168	62.319	29.977	-11.681	74.000	32.342	PK
2			2390.000	60.063	27.736	-13.937	74.000	32.327	PK
3		*	2434.476	92.810	60.543	N/A	N/A	32.267	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/03/27 - 03:13
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: 802.11ac Dual Band Module	Power: DC 3.3V
Test Mode: Transmit by 802.11n-HT40 at Channel 2422MHz, Ant 0 + 1 + 2	

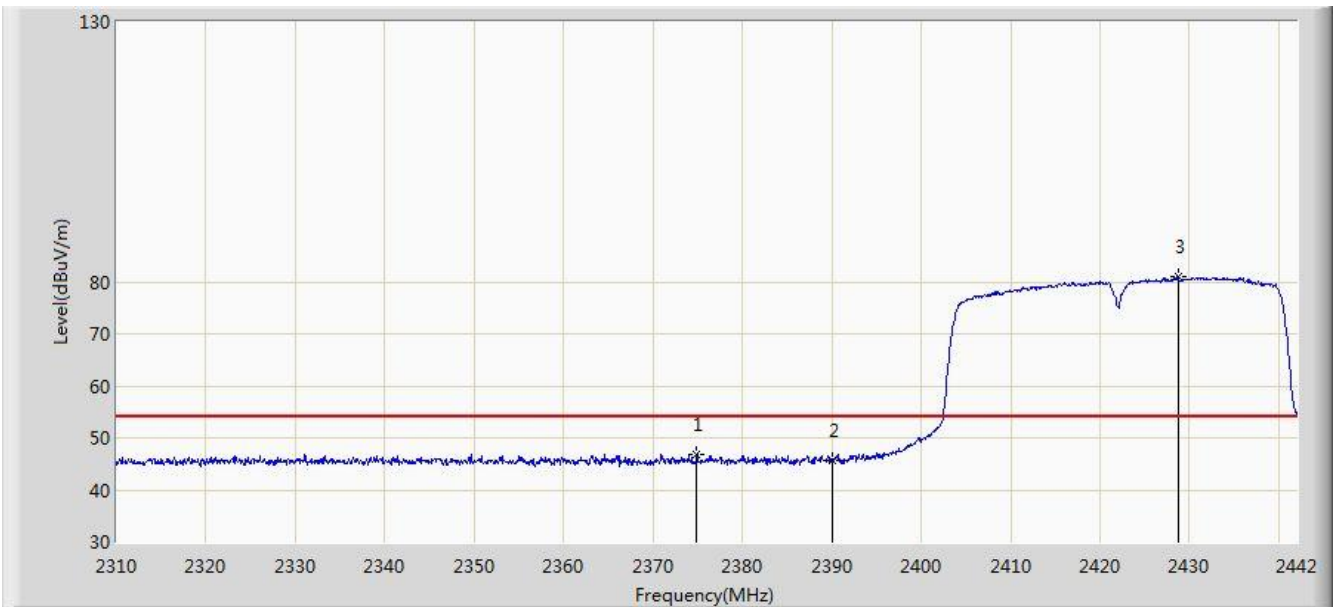


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2374.878	46.884	14.535	-7.116	54.000	32.349	AV
2			2390.000	45.578	13.251	-8.422	54.000	32.327	AV
3		*	2428.734	80.905	48.628	N/A	N/A	32.277	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/03/27 - 03:10
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: 802.11ac Dual Band Module	Power: DC 3.3V
Test Mode: Transmit by 802.11n-HT40 at Channel 2422MHz, Ant 0 + 1 + 2	

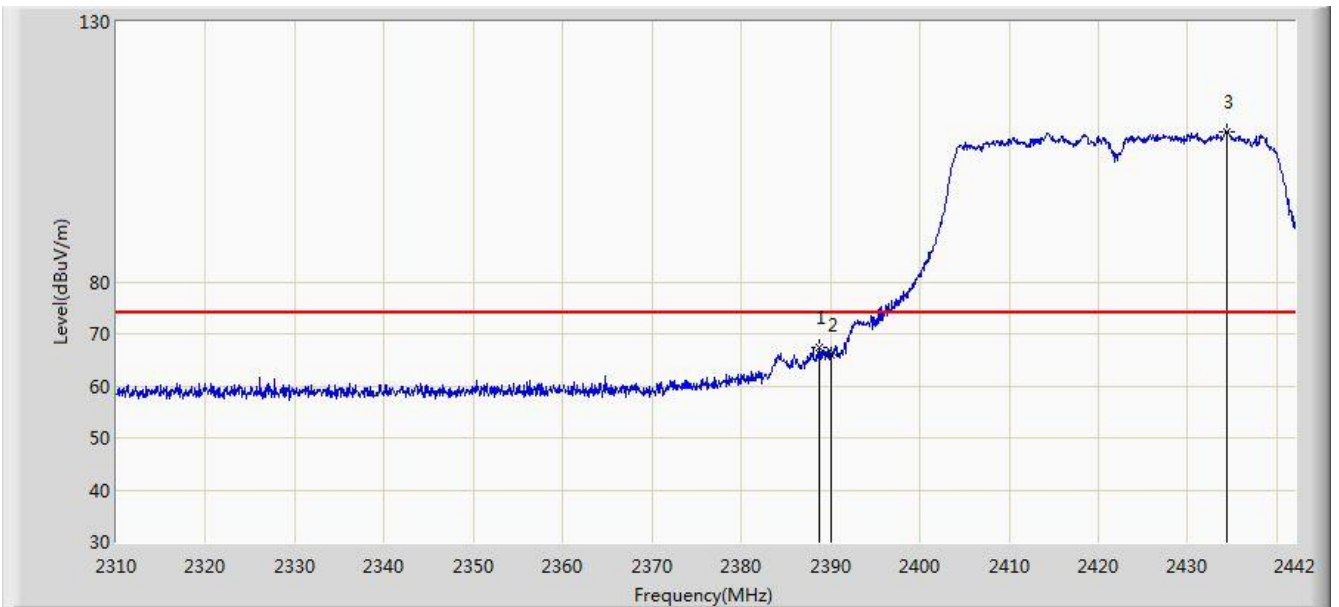


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2388.672	67.513	35.184	-6.487	74.000	32.328	PK
2			2390.000	65.930	33.603	-8.070	74.000	32.327	PK
3		*	2434.344	108.908	76.641	N/A	N/A	32.268	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/03/27 - 03:08
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: 802.11ac Dual Band Module	Power: DC 3.3V
Test Mode: Transmit by 802.11n-HT40 at Channel 2422MHz, Ant 0 + 1 + 2	

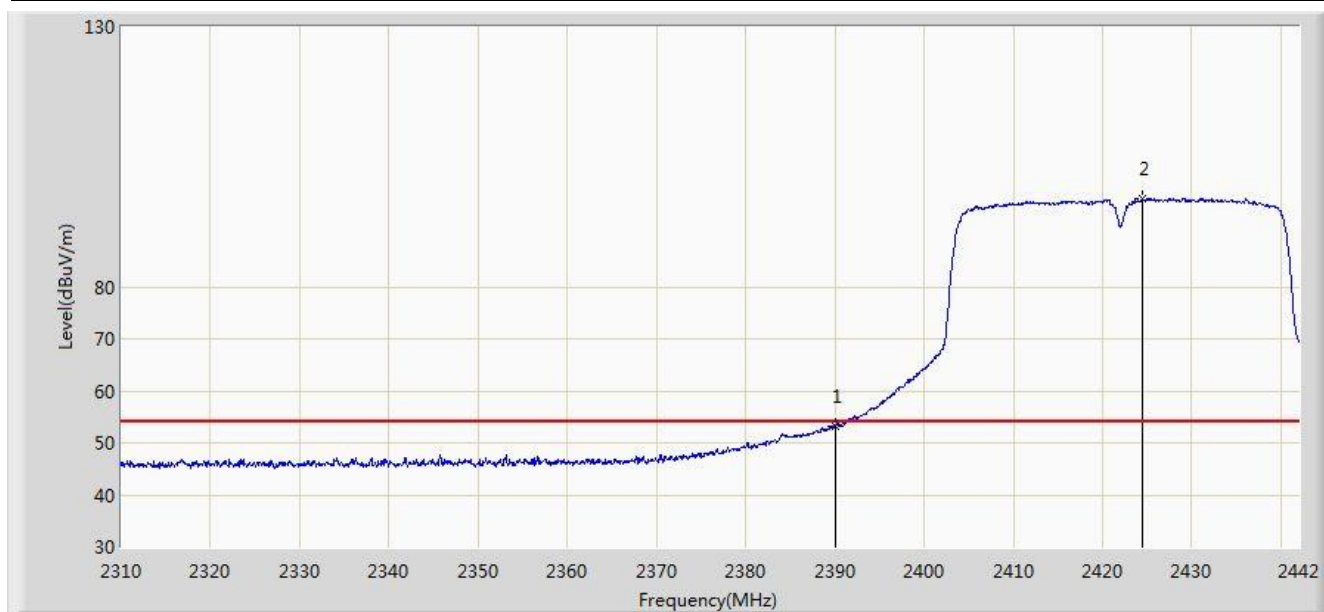


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	53.230	20.903	-0.770	54.000	32.327	AV
2		*	2424.444	96.978	64.699	N/A	N/A	32.279	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/03/27 - 03:54
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: 802.11ac Dual Band Module	Power: DC 3.3V
Test Mode: Transmit by 802.11n-HT40 at Channel 2437MHz, Ant 0 + 1 + 2	

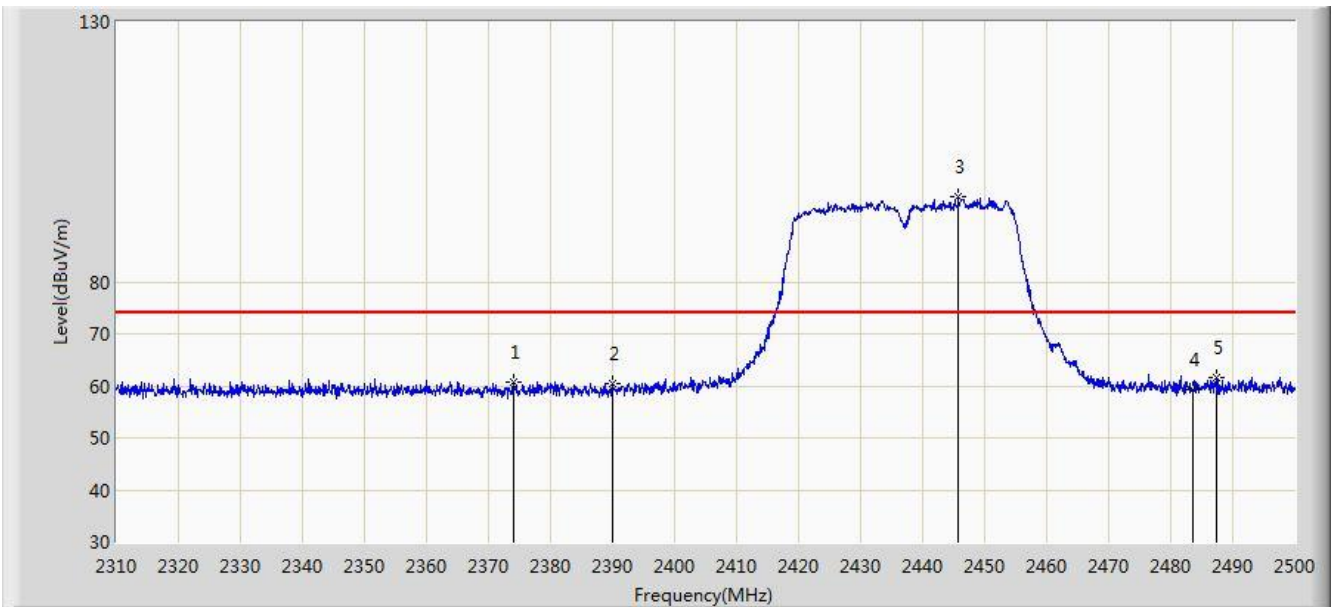


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2373.935	60.709	28.359	-13.291	74.000	32.351	PK
2			2390.000	60.294	27.967	-13.706	74.000	32.327	PK
3		*	2445.755	96.337	64.088	N/A	N/A	32.249	PK
4			2483.500	59.267	26.928	-14.733	74.000	32.340	PK
5			2487.365	61.523	29.169	-12.477	74.000	32.355	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/03/27 - 03:57
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: 802.11ac Dual Band Module	Power: DC 3.3V
Test Mode: Transmit by 802.11n-HT40 at Channel 2437MHz, Ant 0 + 1 + 2	

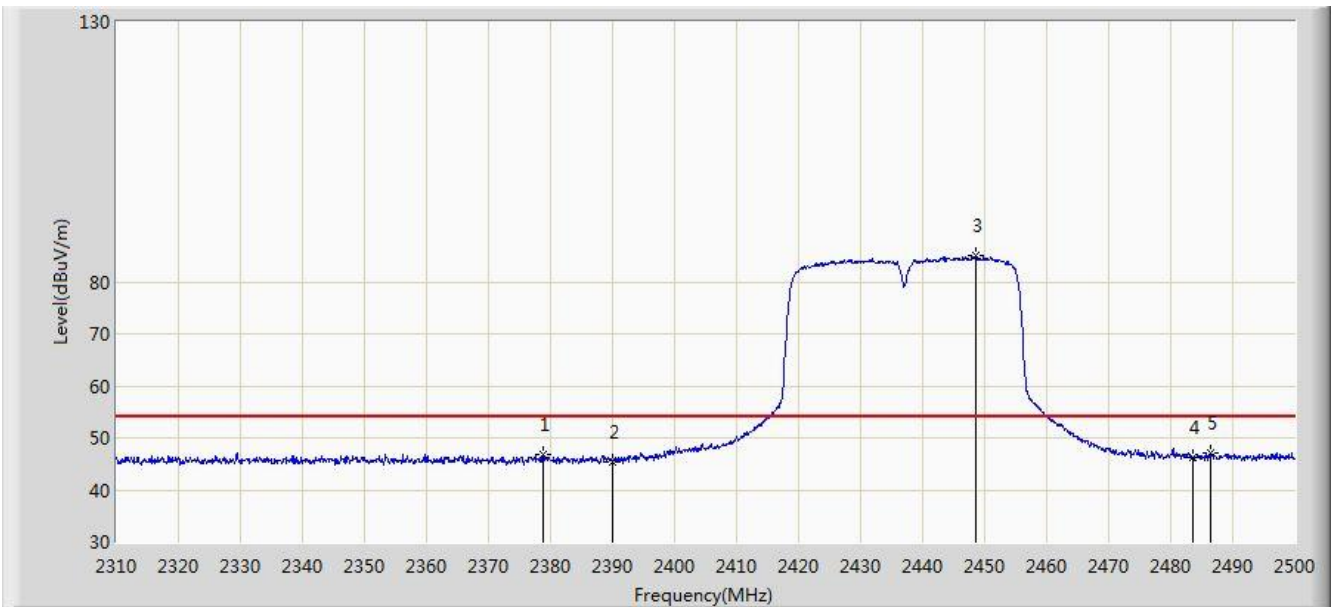


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2378.875	46.817	14.475	-7.183	54.000	32.342	AV
2			2390.000	45.421	13.094	-8.579	54.000	32.327	AV
3		*	2448.510	84.984	52.731	N/A	N/A	32.253	AV
4			2483.500	46.159	13.820	-7.841	54.000	32.340	AV
5			2486.415	47.066	14.715	-6.934	54.000	32.351	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/03/27 - 03:51
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: 802.11ac Dual Band Module	Power: DC 3.3V
Test Mode: Transmit by 802.11n-HT40 at Channel 2437MHz, Ant 0 + 1 + 2	

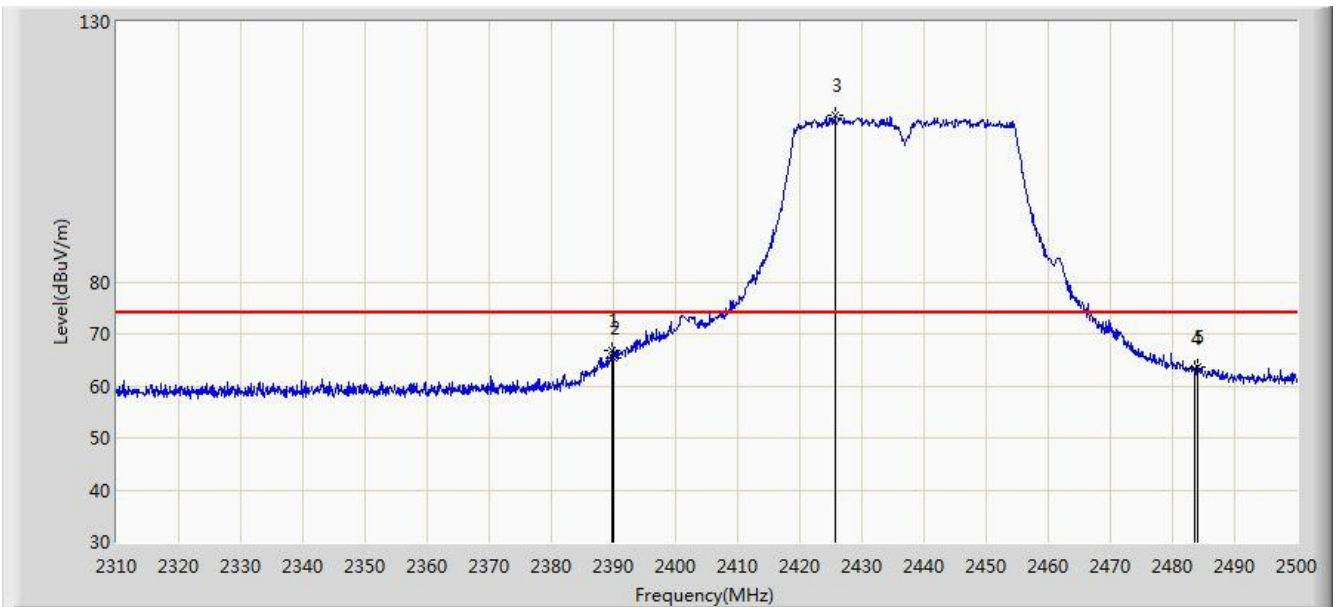


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.705	66.758	34.431	-7.242	74.000	32.328	PK
2			2390.000	65.471	33.144	-8.529	74.000	32.327	PK
3		*	2425.615	111.952	79.673	N/A	N/A	32.279	PK
4			2483.500	63.245	30.906	-10.755	74.000	32.340	PK
5			2484.040	63.736	31.395	-10.264	74.000	32.342	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/03/27 - 03:49
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: 802.11ac Dual Band Module	Power: DC 3.3V
Test Mode: Transmit by 802.11n-HT40 at Channel 2437MHz, Ant 0 + 1 + 2	

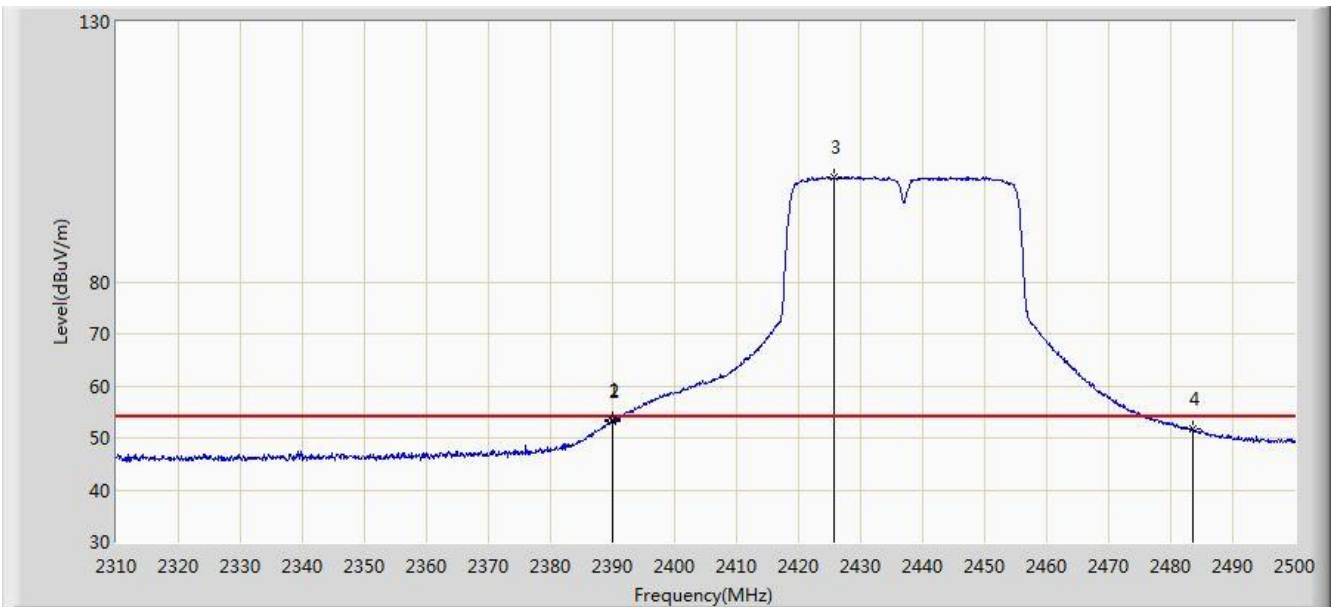


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.895	53.348	21.021	-0.652	54.000	32.327	AV
2			2390.000	53.272	20.945	-0.728	54.000	32.327	AV
3		*	2425.615	100.173	67.894	N/A	N/A	32.279	AV
4			2483.500	51.736	19.397	-2.264	54.000	32.340	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/03/27 - 03:23
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: 802.11ac Dual Band Module	Power: DC 3.3V
Test Mode: Transmit by 802.11n-HT40 at Channel 2452MHz, Ant 0 + 1 + 2	

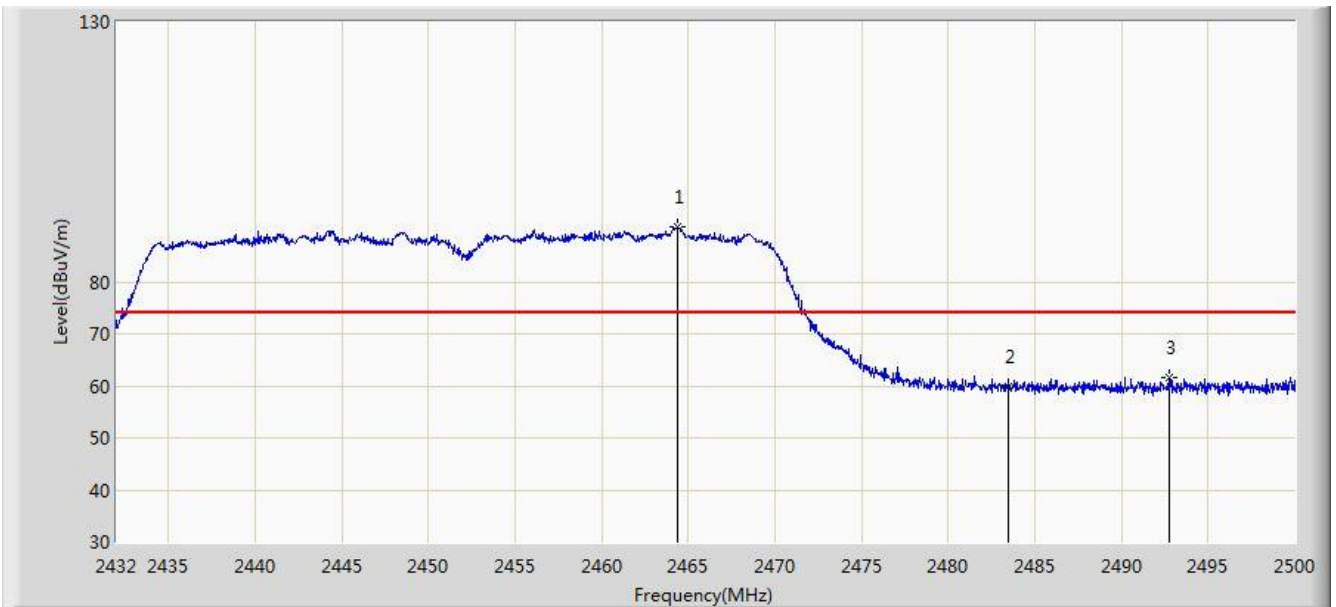


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2464.368	90.456	58.171	N/A	N/A	32.285	PK
2			2483.500	59.939	27.600	-14.061	74.000	32.340	PK
3			2492.792	61.724	29.348	-12.276	74.000	32.375	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/03/27 - 03:25
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: 802.11ac Dual Band Module	Power: DC 3.3V
Test Mode: Transmit by 802.11n-HT40 at Channel 2452MHz, Ant 0 + 1 + 2	

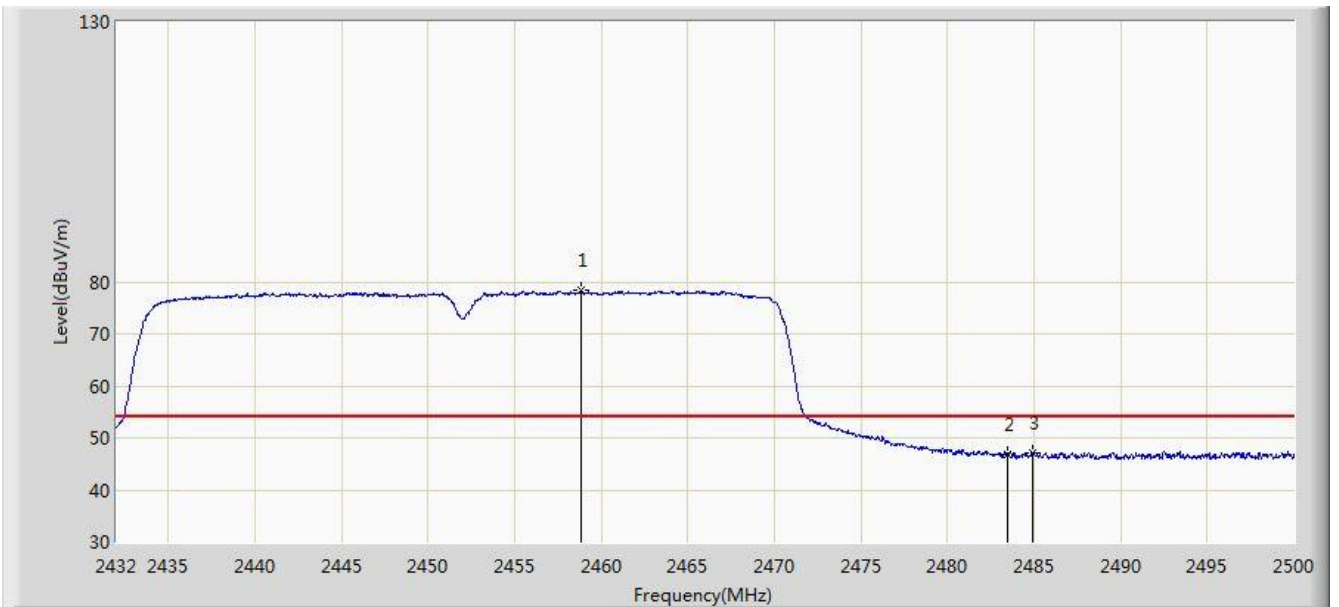


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2458.826	78.445	46.171	N/A	N/A	32.274	AV
2			2483.500	46.934	14.595	-7.066	54.000	32.340	AV
3			2484.904	47.204	14.859	-6.796	54.000	32.345	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

aSite: AC1	Time: 2018/03/27 - 03:22
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: 802.11ac Dual Band Module	Power: DC 3.3V
Test Mode: Transmit by 802.11n-HT40 at Channel 2452MHz, Ant 0 + 1 + 2	

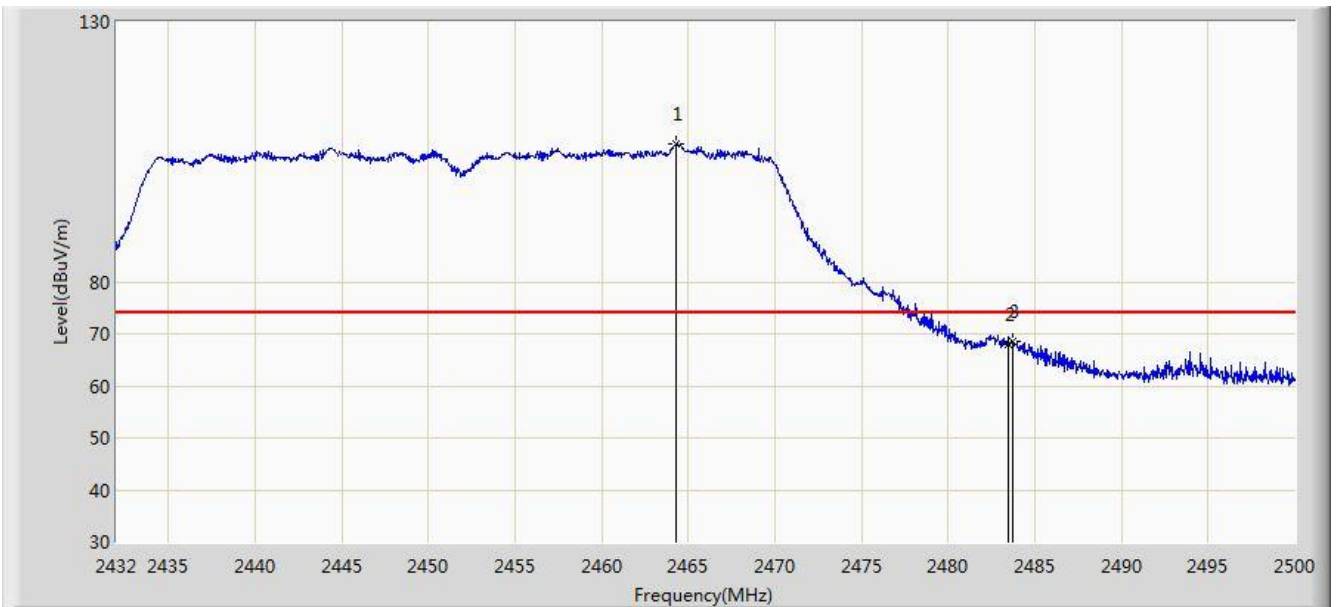


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2464.334	106.499	74.214	N/A	N/A	32.285	PK
2			2483.500	67.967	35.628	-6.033	74.000	32.340	PK
3			2483.748	68.560	36.220	-5.440	74.000	32.340	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/03/27 - 03:21
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: 802.11ac Dual Band Module	Power: DC 3.3V
Test Mode: Transmit by 802.11n-HT40 at Channel 2452MHz, Ant 0 + 1 + 2	

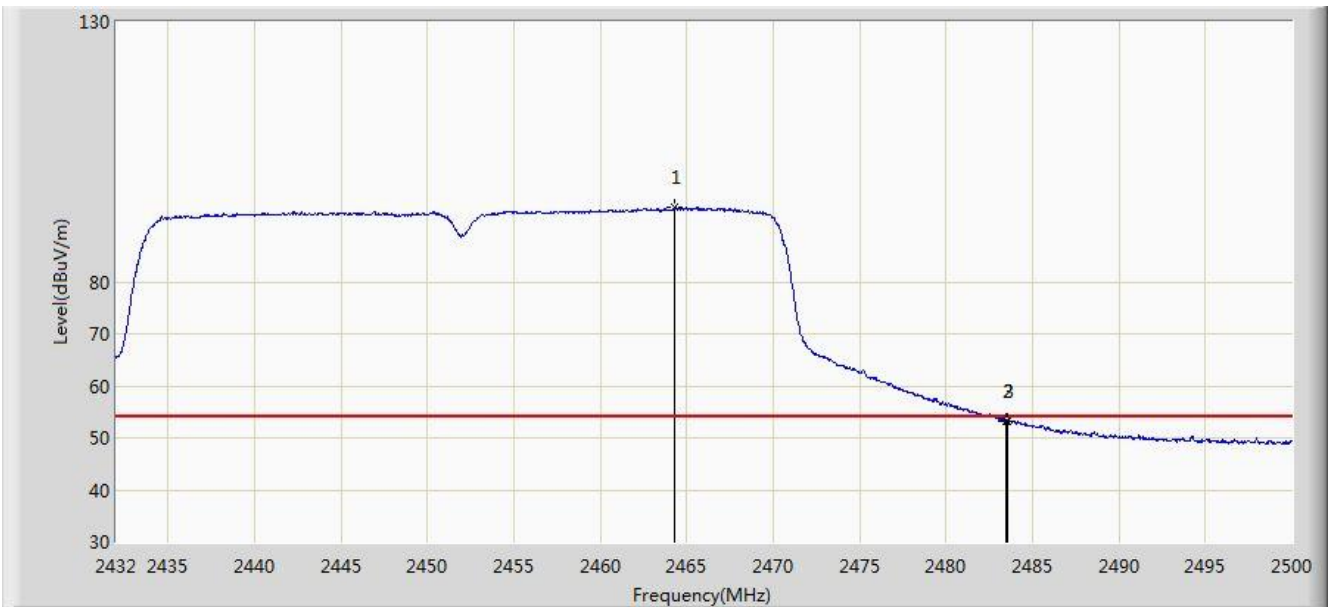

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2464.334	94.361	62.076	N/A	N/A	32.285	AV
2			2483.500	53.256	20.917	-0.744	54.000	32.340	AV
3			2483.578	53.277	20.938	-0.723	54.000	32.340	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

7. CONCLUSION

The data collected relate only the item(s) tested and show that the **802.11ac Dual Band Module** is in compliance with Part 15C of the FCC Rules.

The End