




Electronic Passport Reader AXESS F800

USER GUIDE

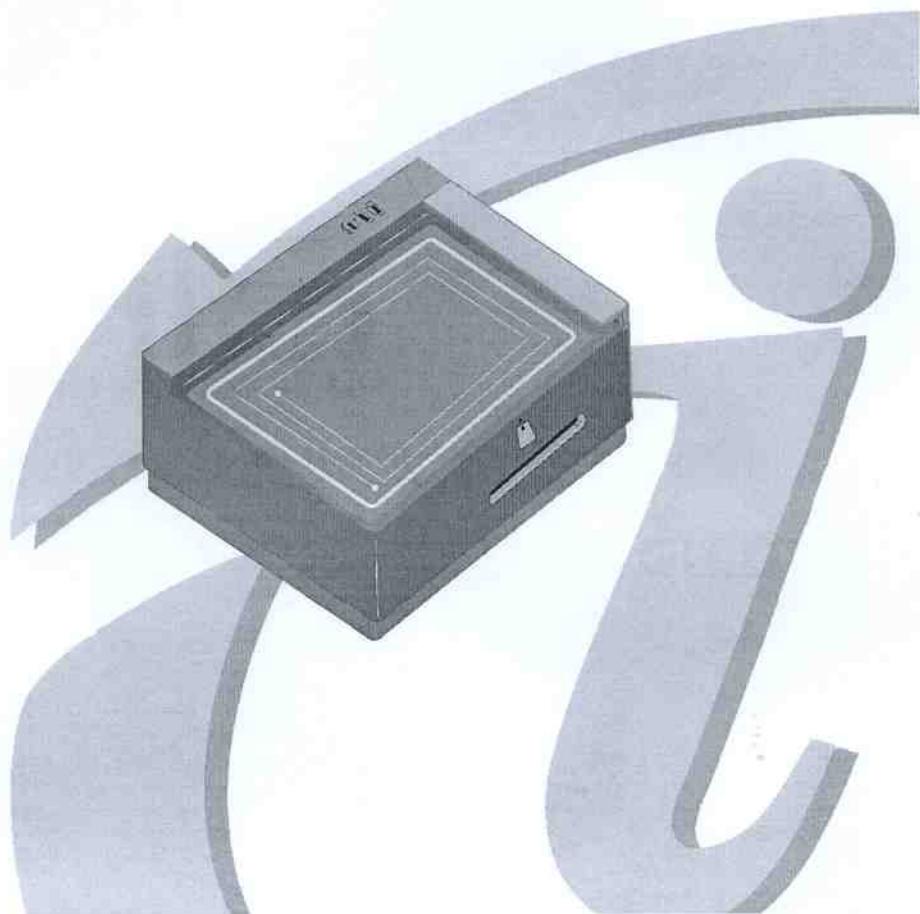

Thank you for purchasing IRIS' Electronic Passport Reader, AXESS F800.

The AXESS F800 is consists of an intelligent combination advanced security and contactless radio frequency (RF) communication which prevents abuse from unauthorised third parties, allows multiplicity in terms of the number of electronic passports and contactless cards used and is highly resistant to environmental variables.

The AXESS F800 is fast and reliable, is compatible with Operating Systems such as Microsoft® Windows® XP or Windows® 2000 and is compliant with the International Civil Aviation Organisation's standards. Furthermore, setting up the unit is a breeze and very low maintenance is needed to ensure that the AXESS F800 is performing at its optimum level.

We hope that you receive satisfaction from the use of the AXESS F800 which we have pledged to provide you with to fulfil all your security needs of protecting important, national security dependent, national identity documents.

This Manual will provide you, as concisely as possible, with all the information you need to know to successfully setup, operate and make the best out of your AXESS F800 device.

For first time users to the AXESS F800, we recommend that you have a look at some of the Precautions and Features of the AXESS F800 to gain an overview to the product.



Edition Number 1.0, First Publication, May 2007.

Published by IRIS Corporation Berhad without any warranty. Improvements and changes to this guide may be made by IRIS Corporation Berhad at any time and without notice. disclaimer in the undergoes process of continuous innovation and improvement to IRIS' products and processes, thus

IRIS® Corporation Berhad 2007. All rights reserved.

No part of this publication herein may be reproduced or transmitted in any form or by any means, including photocopying and recording, without the written permission of the copyright holder, for which applications should be addressed to IRIS Corporation Berhad. Such written permission must also be obtained before any part of this publication is stored in a retrieval system of any nature.

The word "IRIS", "i" logo and "IRIS and "i" logo" are the registered trademarks of IRIS Corporation Berhad's subsidiary, IRIS Technologies (M) Sdn. Bhd.

Other product and company names mentioned herein belong to their respective owners.

The product is provided on an "AS IS" basis and any express or implied warranties, including, but not limited to, the implied warranties of merchantability and fitness for a particular purpose are disclaimed. In no event shall IRIS Corporation Berhad and its subsidiary be liable for any direct, indirect, incidental, special, exemplary, or consequential damages (including, but not limited to, procurement or substitute goods or services; loss of use, data, or profits; or business interruption) however caused and whether in contract, strict liability, or tort arising in any way out of the use of this product, even if advised of the possibility of such damage.

Please read the Terms and Conditions and User Guide for safe and efficient use and the LIMITED WARRANTY terms listed on separate sheet and obtainable upon request before you use this product.

Congratulations on your purchase of IRIS' Electronic Passport Reader, AXESS F800. For first time users, it is recommended that you read the following Health and Safety Precautions before attempting to use the AXESS F800 product.

- The AXESS F800 is Electrostatic Discharge (ESD) sensitive. Exercise caution when using this product.
- Do not drop the reader.
- Do not install the reader in an outdoor environment.
- Do not expose the reader to sources of extreme moisture and avoid handling it with wet hands.
- Do not place or expose the reader under direct sun light.
- Do not install the reader in an environment close to metallic objects or materials.
- Do not put magnets or metals on top of the reader.
- Do not service or repair the reader by non-IRIS certified technical expert.
- Do not open the reader by yourself or non-IRIS certified technical expert.

This device complies with Part 15 of the FCC Rules.

Operation is subject to the following two conditions:

- This device may not cause harmful interference, and
- This device must accept any interference received, including interference that may cause undesired operation.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

Reorient or relocate the receiving antenna.

Increase the separation between the equipment and receiver.

Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

Consult the dealer or an experienced radio/TV technician for help.




PRECAUTIONS

TABLE OF CONTENTS



PREFACE	1
COPYRIGHT & DISCLAIMER	2
PRECAUTIONS	3
TABLE OF CONTENTS	4
PRODUCT INTRODUCTION.....	5
□ In Your AXESS F800 Package	5
□ Overview of the F800 Reader	6
□ Key Features of the F800 Reader	6
□ Ensuring Your Security	8
□ Placing an Electronic Passport on the AXESS F800 Reader.....	9
□ Additional Features of the AXESS F800 Reader.....	10
□ Applications	11
□ Features and Benefits	11
COMPONENTS & COMPONENT FUNCTIONS GUIDE	12
□ Setting Up the AXESS F800 Reader	12
MAINTENANCE PROCEDURES.....	13
□ Firmware Maintenance	13
TECHNICAL SUPPORT INFORMATION	14
HARDWARE SPECIFICATIONS	15
WARRANTY STATEMENT	17

In Your AXESS F800 Package


IRIS AXESS F800 Electronic Passport Reader	USB 2.0 Cable
	
Product CD (where this document is stored)	

Overview of the AXESS F800 Reader


The IRIS AXESS F800 is specifically designed to read electronic passport in any orientation with good results in levels of interoperability. In addition, the reader is easy to set up with no tuning or calibration required and has been developed to work with minimum hardware maintenance and supervision.

In fact, the AXESS F800 has been built from our AXESS F1000's accomplishment of being one of the only two readers among over 50 reading devices to achieve 100% interoperability levels in Berlin's Interoperability Test 2006.

Key Features of the AXESS F800 Reader

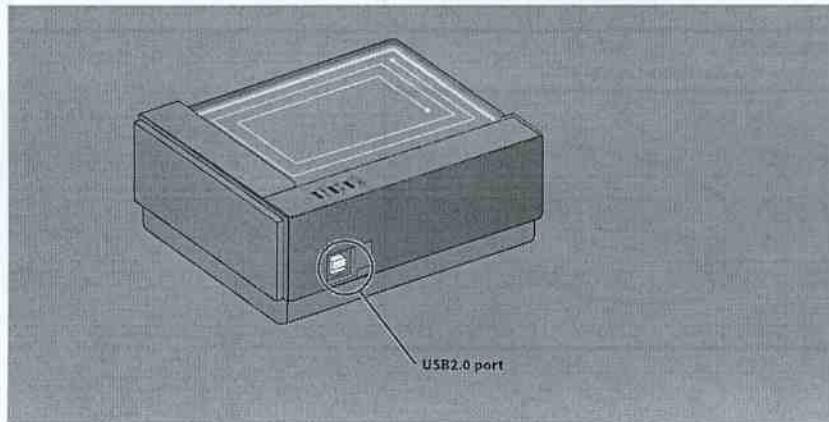

PRODUCT INTRODUCTION

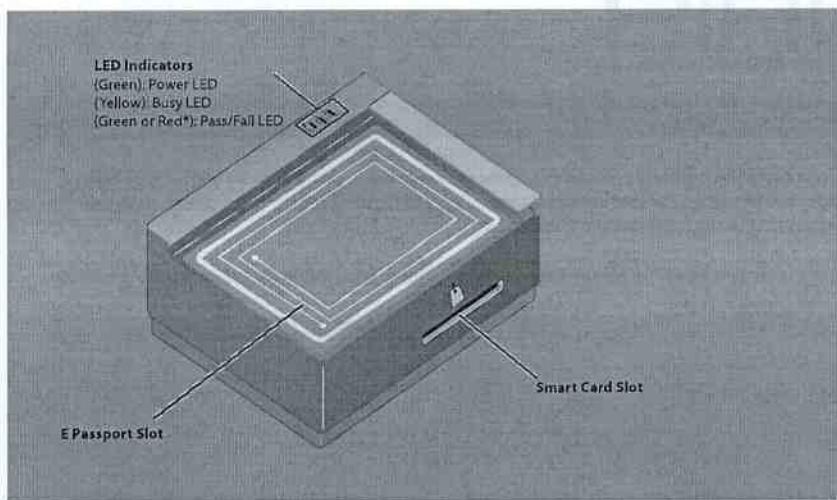


** User Configurable*

Ensuring Your Security

To achieve the highest level of security for our customers, we have designed an ingenious concept of using SAM (Secure Access Module) card (s), of which up to a maximum of four may be inserted into the SAM slot at any one time.


For instructions on how to insert the SAM card, kindly refer to the following illustration below:

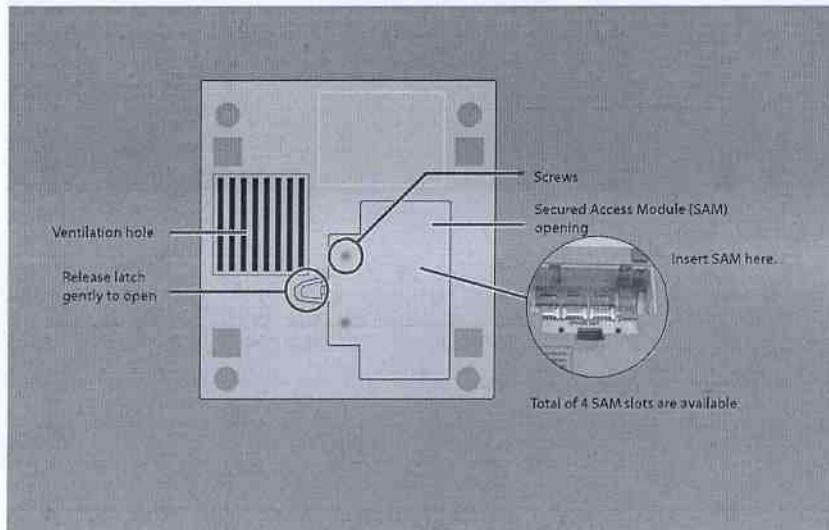

PRODUCT INTRODUCTION

Placing an Electronic Passport on the AXESS F800 Reader

There are two placement orientation of which the electronic passport can be read: closed-book or open-book. With closed-book orientation, the passport is placed on the surface of the reader until the reader activates the reading process. Similar to the closed-book orientation, the open-book passport is opened and the data page, as opposed to the cover, is placed on the reading surface of the reader. The reason for enabling both closed-book and open-book passport reading is because some passports may contain a security mesh on the back or front cover of the passport. The security mesh acts as a preventive mechanism for unauthorised eavesdropping or skimming of the information within the passport chip by unauthorised individuals. One example of such passport with this feature is United State's e-Passport.

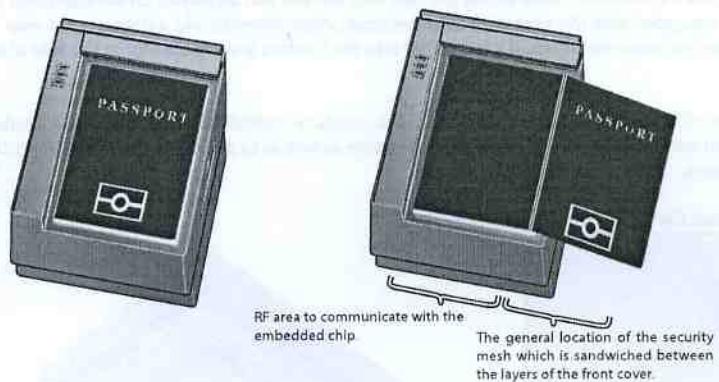

If the reading of the passport is unsuccessful, it is recommended that the passport book's orientation is switched.

PRODUCT INTRODUCTION





Additional Features of the AXESS F800 Reader

Although the main feature of the AXESS F800 is to read electronic passports, the AXESS F800 also has a range of other features which complements and completes this product offering.


By placing a contactless card or more popularly known as a Mifare® card onto the surface of the reader, the information stored within the card may be read and displayed on the computer's screen equipped with the necessary software application. Alternatively, a contact card may produce the same results when it is inserted into the Contact Smart Card Slot at the side of the reader.

IRIS' AXESS F800 is indeed uniquely designed to combine multiple technologies into a single compact unit to be utilised for various applications as well as to open up possibilities for future expansion.

A: Contact Card

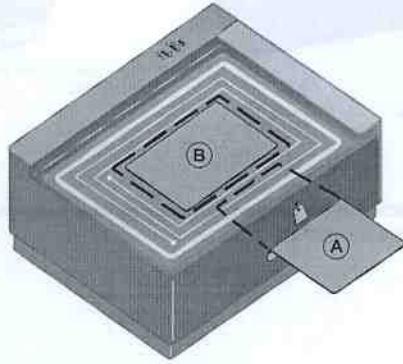

B: Contactless Card



Applications


- Passport Issuance
- Airline Ticketing
- Border Control
- Check-in for Airlines
- Banks (Identity Verification)
- General Identity Verification

Features and Benefits

- Accepts all travel documents conforming to international standard sizes from ID-1 sized contact & contactless cards to ID-3 sized electronic passports.
- Easy placement of e-passport on the reader and is easily supports the e-passport in an open-book condition.
- Provides contactless interface and is ISO 14443 Parts 2, 3, and 4 compliant
- LED Indicators for Power status, Radio Frequency activity status, and reading status.
- Supports transparent commands for both contact and contactless chips.
- Optional Software Development Kit (SDK) is available convenience in software development.
- USB powered.
- Firmware can be upgraded through In-System Programming, if necessary.
- IRIS Proprietary Interface.

Setting Up the AXESS F800 Reader

- Connect the reader to the PC using the supplied USB 2.0 cable.
- Connect one side to reader and the end to the PC.
- The Red LED on the reader will turn on, indicating the reader has been powered up.

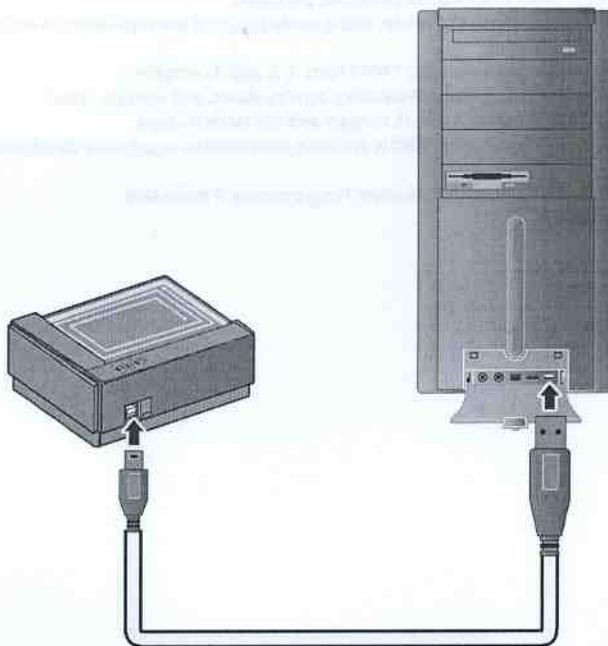

MAINTENANCE PROCEDURES

Firmware Maintenance

Firmware maintenance can be done through In System Programming (ISP), where upgrades can be carried out on-site.

© IRIS CORPORATION BERHAD 2007. ALL RIGHTS RESERVED.

TECHNICAL SUPPORT INFORMATION



For technical support for this product, please contact your local reseller or distributor. If you have purchased this item directly from IRIS, please visit the IRIS eHelp Desk at:
<http://ehelpdesk.iris.com.my>

Alternatively, you may call the IRIS Help Line at +603 8996 0446, between 0900 to 1700 hours, GMT +8. Helpline is available from Mondays to Fridays, excluding Malaysia public holidays and company shut down.

HARDWARE SPECIFICATIONS

Product Name		AXESS F800
Complies To	ISO 14443, Type A and B, Part 2 - 4	
Special Features	Designed to read e-passports in any orientation and with good interoperability.	
RF Interface		
Carrier, Fc	13.56 MHz +/- 7 kHz	
RF Field Strength	Between 1.5Am-1 to 7.5Am-1, software controllable	
Sub-carrier frequency	Fc /16 (~847.5 kHz)	
Baud Rate	106, 212, 424, 848 kbps*	
Modulation	Type A	Type B
Modulation Index	100%	10% - 14% Software adjustable
Bit Coding (Transmit)	Modified Miller	NRZ-L
Bit Coding (Received)	Manchester (106 kbps) NRZ-L (> 106 kbps)	NRZ-L
Initialization, Anti-collision and protocol		
Frame size	64 bytes, 128 bytes, 256 bytes	
Anti-collision	Bit collision detection, triple cascade level	Time slot protocol
Initialization	REQA QUPA Anti-collision Select HLTA De-select RATS PPS	REQB QUPB Slot-Marker HTLB De-select
Mifare Commands	Supported	
Protocol Command	R (ACK) R (NAK) S (WTX) S (De-select)	
Adjustments	FWI, SFGI	SOF, EOF, FWI
Supported Features	CID	CID, AFI
Electrical Specifications		
Processor	8 bit micro-controller	
Memory	NVRAM 32 kB, 4 kB EEPROM	
Host Interface	USB 2.0 Full-Speed	

© IRIS CORPORATION BERHAD 2007. ALL RIGHTS RESERVED.

HARDWARE SPECIFICATIONS



Contact Card Interface	1 ID-1 full size card slot 4 ID-0 SIM sized card slots Complies to ISO 7816, Part 1 - 3 Support 5V and 3V cards Features Protocol Type Selection (PTS) up to 115,200 baud Support card clock frequencies: 3.58 MHz, 4.92 MHz
LED	Red (Power) Yellow (RF Active) Green/ Red (Pass/ Fail)
Power	USB bus powered
Mechanical	
Material	ABS plastic material casing
Dimension W x D x H (mm)	138 x 122 x 50
Weight	366 g approx.
Environment	
Operating Temperature	0°C to 50°C
Software	
PC USB Driver	USB 2.0 driver for Win XP, Win 2000
Support Firmware Upgrades	In-System Programming

**Data rate is subject to the specific silicon and inlay design. Performance with Passport with built-in anti-skimming feature may not achieve the best specification.*



- j. Any equipment or components that were not included in Consumer's product as originally sold to Consumer.
- k. Normal wear and tear.
- l. Cosmetic damage that does not affect functionality.

10. IRIS does not warrant uninterrupted or error-free operation of the Product. If a problem develops during the limited warranty period, the Consumer shall take the following step-by-step procedure:

- a. The Consumer shall return the Product to the place of purchase for repair or replacement processing.
- b. The Consumer shall include a return address, daytime phone number and/or fax number, complete description of the problem, proof of purchase (if requested) and service agreement (if applicable). Expenses related to removing the Product from an installation are not covered under this limited warranty.
- c. The Consumer will be billed for any parts or labor charges not covered by this limited warranty. The Consumer will be responsible for any expenses related to reinstallation of the Product.
- d. IRIS will repair the Product under the limited warranty within 30 days after receipt of the Product. If IRIS cannot perform repairs covered under this limited warranty within 30 days, or after a reasonable number of attempts to repair the same defect, IRIS at its option, will provide a replacement Product or replace the Products with products of identical type or refund the purchase price of the Product less a reasonable amount for usage.
- e. If the Product is returned during the limited warranty period, but the problem with the Product is not covered under the terms and conditions of this limited warranty, the Consumer will be notified and given an estimate of the charges the Consumer must pay to have the Product repaired, with all shipping charges billed to the Consumer. If the estimate is refused, the Product will be returned freight collect. If the Product is returned after the expiration of the limited warranty period, IRIS' normal service policies shall apply and the Consumer will be responsible for all shipping charges.

11. IRIS' MAXIMUM LIABILITY UNDER THIS WARRANTY IS LIMITED TO THE PRICE PAID FOR THE PRODUCT. ANY IMPLIED WARRANTY OF MERCHANTABILITY, OR FITNESS FOR A PARTICULAR PURPOSE OR USE, SHALL BE LIMITED TO THE DURATION OF THE FOREGOING LIMITED WRITTEN WARRANTY. OTHERWISE, THE FOREGOING LIMITED WARRANTY IS THE CONSUMER'S SOLE AND EXCLUSIVE REMEDY AND IS IN LIEU OF ALL OTHER WARRANTIES, EXPRESS OR IMPLIED. IRIS SHALL NOT BE LIABLE FOR SPECIAL, INCIDENTAL, PUNITIVE OR CONSEQUENTIAL OR SPECIAL DAMAGES, HOWSOEVER CAUSED, INCLUDING BUT NOT LIMITED TO LOSS OF ANTICIPATED BENEFITS OR PROFITS, LOSS OF SAVINGS OR REVENUE, LOSS OF DATA, PUNITIVE DAMAGES, LOSS OF USE OF THE PRODUCT OR ANY ASSOCIATED EQUIPMENT, COST OF CAPITAL, COST OF ANY SUBSTITUTE EQUIPMENT OR FACILITIES, DOWNTIME, THE CLAIMS OF ANY THIRD PARTIES, INCLUDING CUSTOMERS, AND INJURY TO PROPERTY, RESULTING FROM THE PURCHASE OR USE OF THE PRODUCT OR ARISING FROM BREACH OF THE WARRANTY, BREACH OF CONTRACT, NEGLIGENCE, STRICT TORT, OR ANY OTHER LEGAL OR EQUITABLE THEORY, EVEN IF IRIS KNEW OF THE LIKELIHOOD OF SUCH DAMAGES. IRIS SHALL NOT BE LIABLE FOR DELAY IN RENDERING SERVICE UNDER THE LIMITED WARRANTY, OR LOSS OF USE DURING THE PERIOD THAT THE PRODUCT IS BEING REPAIRED.

12. This is the entire warranty between IRIS and the Consumer, and supersedes all prior and contemporaneous agreements or understandings, oral or written, relating to the Product, and no representation, promise or condition not contained herein shall modify these terms. If any term of this Limited Warranty is illegal or unenforceable, the legality and enforceability of the remaining provisions shall not be affected or impaired. This Limited Warranty shall be interpreted according to Malaysian law.

Questions concerning this limited warranty may be directed to:


IRIS Corp Berhad.
Attn: Sales and Marketing Department
IRIS Smart Complex, Technology Park Malaysia, 57000 Kuala Lumpur, Malaysia
Telephone: +603 8996 0788
Facsimile: +603 8996 0441
<http://www.iris.com.my>

IRIS Corporation Berhad ("IRIS") warrants that this "Product" is free from defects in material and workmanship that result in Product failure during normal usage, according to the following terms and conditions:

1. The limited warranty for the Product extends for one (1) years beginning on the date of the purchase of the Product.
2. The warranty is valid only if original proof of purchase issued to the original purchaser for the product, specifying the purchase date is presented with the Product to be repaired or replaced.
3. The limited warranty extends only to the original purchaser ("Consumer") of the Product and is not assignable or transferable to any subsequent purchaser/end-user.
4. If this Product was purchased from a Dealer or Reseller or Distributor, please return it to the Dealer or Reseller or Distributor from whom it was purchased, should this Product need any warranty service.
5. During the limited warranty period, IRIS will repair, or replace, at IRIS' sole option, any defective parts, or any parts that will not properly operate for their intended use with new or refurbished replacement items if such repair or replacement is needed because of product malfunction or failure during normal usage. No charge will be made to the Consumer for any such parts. IRIS will also pay for the labour charges incurred by IRIS in repairing or replacing the defective parts. The limited warranty does not cover any cosmetic defects. IRIS shall not be liable for any other losses or damages. These remedies are the Consumer's exclusive remedies for breach of warranty.
6. IRIS reserves the right to elect refund, instead of repair or replacement, of the price paid by the Consumer for the Product less a reasonable amount for usage or depreciation, as the case may be.
7. Upon request from IRIS, the Consumer must prove the date of the original purchase of the Product by a dated bill of sale or dated itemized receipt.
8. The Consumer shall bear the cost of shipping the Product to and from IRIS, and other incidental charges that may incur in the course of the freight and delivery.
9. The Consumer shall have no coverage or benefits under this limited warranty if any of the following conditions are applicable:
 - a. The Product has been subjected to abnormal use, abnormal conditions, improper storage, exposure to moisture or dampness, unauthorized modifications, unauthorized connections, unauthorized repair, misuse, neglect, abuse, accident, alteration, improper installation, operated outside the product or component specifications or other acts which are not the fault of IRIS, including damage caused by shipping, or unauthorized service or parts, or the Product has been used in combination with other spare parts or products by other manufacturers or suppliers. Any warranty applicable to software, non-IRIS branded, is provided by the original manufacturer.
 - b. The Product has been damaged from external causes such as but not limited to collision with an object, or from fire, flooding, sand, dirt, windstorm, lightning, earthquake or damage from exposure to weather conditions, an Act of God, or battery leakage, theft, blown fuse, or improper use of any electrical source, damage caused by computer or internet viruses, bugs, worms, Trojan Horses, cancel-bots or damage caused by the connection to other products not recommended for interconnection by IRIS.
 - c. The Product serial number plate or the enhancement data code has been removed, defaced or altered.
 - d. The Product tamper seal(s) has been damaged.
 - e. The defect or damage was caused by third party software problems introduced into the Product.
 - f. The Product has minor imperfections within design specification or that do not materially alter functionality.
 - g. Damages caused by usage that is not in accordance with product instructions, failure to follow product instructions or failure to perform preventive maintenance.
 - h. Damages caused by the combination of IRIS Products with other non-IRIS products, accessories, parts or components.
 - i. Software, including the operating system and software added to the Consumer's product through IRIS factory-integration system, third-party software, or the reloading of software.

Index

- C**
 - Contactless Card 10
 - Contact Card 10
- E**
 - Electronic Passport 9
 - E Passport Slot 7
- F**
 - FCC Rules 3
 - Firmware 13
- I**
 - IRIS eHelp Desk 14
 - IRIS Help Line 14
 - ISO 14443 11
- L**
 - LED Indicator 7
- P**
 - Precautions 3
 - Product CD 5
- S**
 - SAM Card 8
 - SAM Slot 8
 - Security 8
 - Smart Card Slot 7
 - Software Development Kit (SDK) 11
 - Specifications 15, 16
- T**
 - Technical Support 14
- U**
 - USB2.0 Cable 5, 12
 - USB2.0 Port 6
- W**
 - Warranty 17, 18

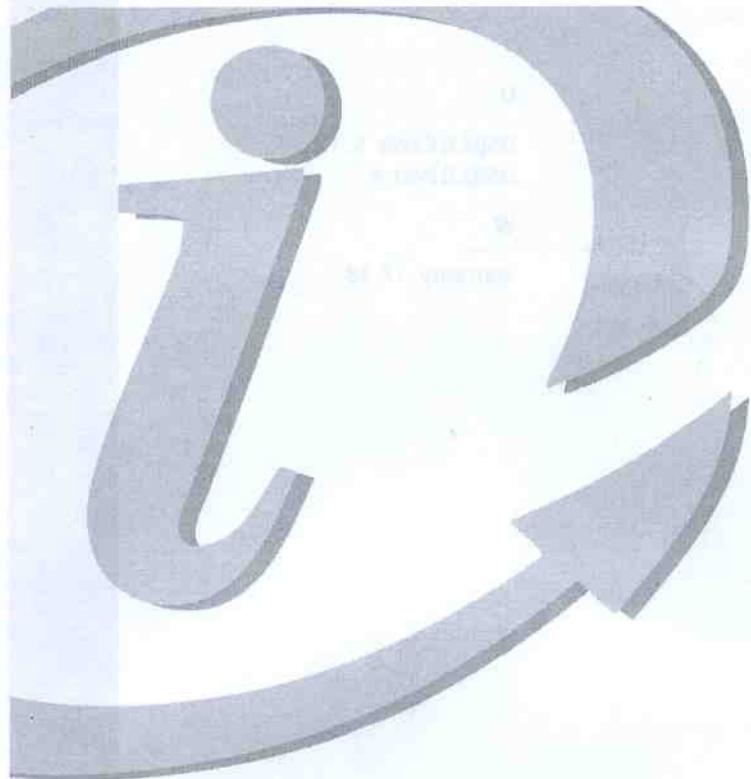

IRIS

Bringing Solutions to Life

IRIS Corporation Berhad (302232-X)

IRIS Smart technology Complex, Technology Park Malaysia,
Bukit Jalil, 57000 Kuala Lumpur, Malaysia.
Tel: 603-8996 0788 Fax: 603-8996 0441

Email: sales@iris.com.my