





<3Mbps>


CSE Plot on Low Ch between 30MHz ~ 1 GHz

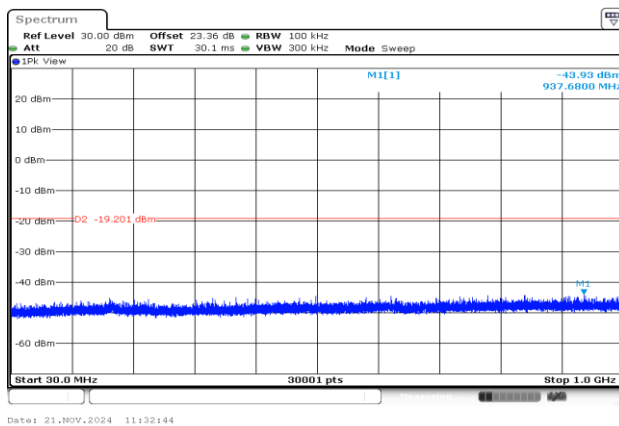


CSE Plot on Low Ch between 1GHz ~ 26.5GHz

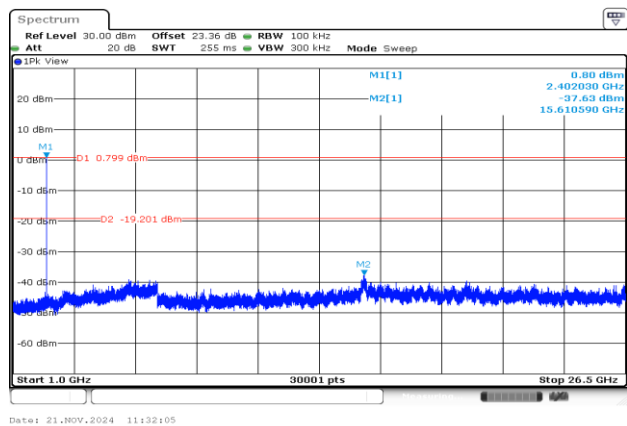


CSE Plot on Mid. Ch between 30MHz ~ 1 GHz

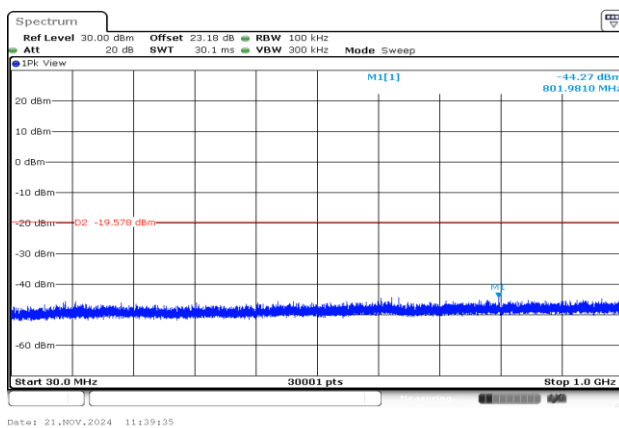


CSE Plot on Mid. Ch between 1GHz ~ 26.5GHz

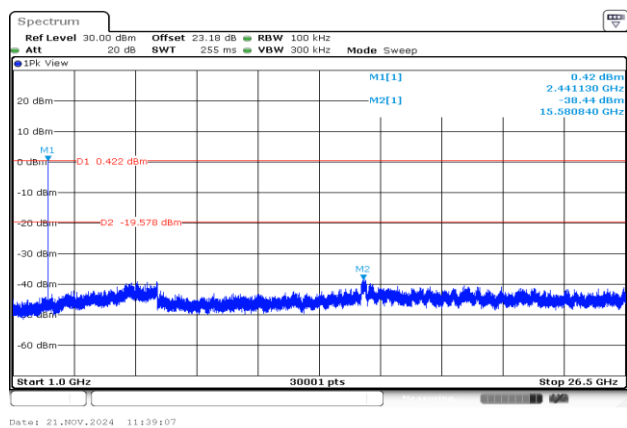

CSE Plot on High Ch between 30MHz ~ 1 GHz

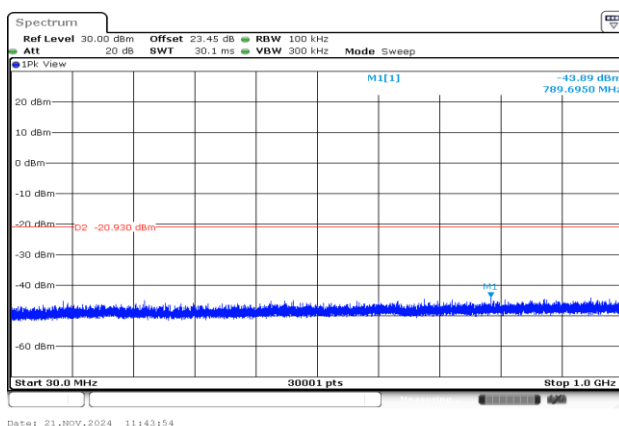

CSE Plot on High Ch between 1GHz ~ 26.5GHz

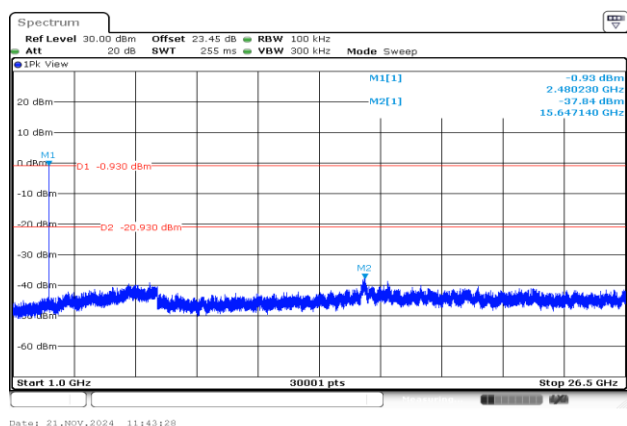




Appendix B. AC Conducted Emission Test Results

Test Engineer :	Calvin Wang	Temperature :	23~26℃
		Relative Humidity :	45~55%

EUT Information

Test Mode : Mode 1
 Test Voltage : 120Vac/60Hz
 Phase : Line

Full Spectrum

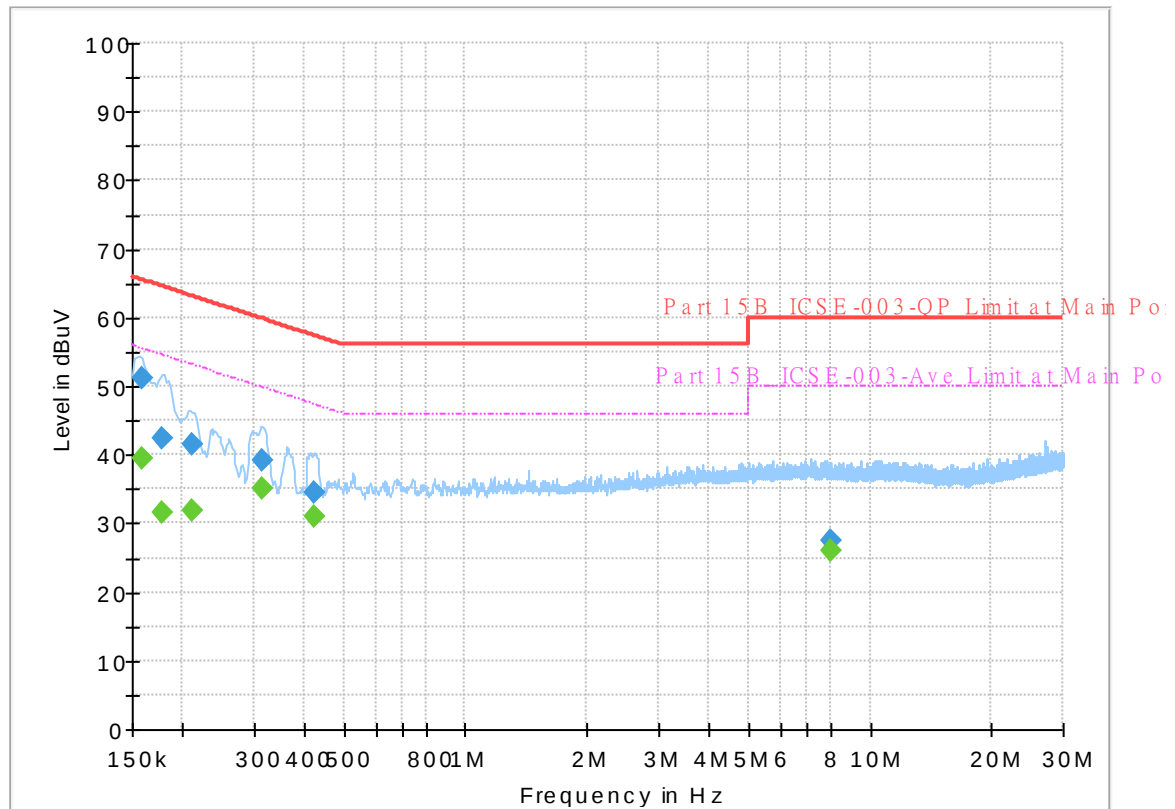


Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.159000	---	39.55	55.52	15.97	L1	OFF	19.8
0.159000	51.19	---	65.52	14.33	L1	OFF	19.8
0.177000	---	31.45	54.63	23.18	L1	OFF	19.8
0.177000	42.37	---	64.63	22.26	L1	OFF	19.8
0.210750	---	31.92	53.18	21.26	L1	OFF	19.8
0.210750	41.57	---	63.18	21.61	L1	OFF	19.8
0.314250	---	34.96	49.86	14.90	L1	OFF	19.8
0.314250	39.26	---	59.86	20.60	L1	OFF	19.8
0.422250	---	31.13	47.40	16.27	L1	OFF	19.8
0.422250	34.37	---	57.40	23.03	L1	OFF	19.8
8.004750	---	25.90	50.00	24.10	L1	OFF	20.2
8.004750	27.57	---	60.00	32.43	L1	OFF	20.2

EUT Information

Test Mode : Mode 1
 Test Voltage : 120Vac/60Hz
 Phase : Neutral

Full Spectrum

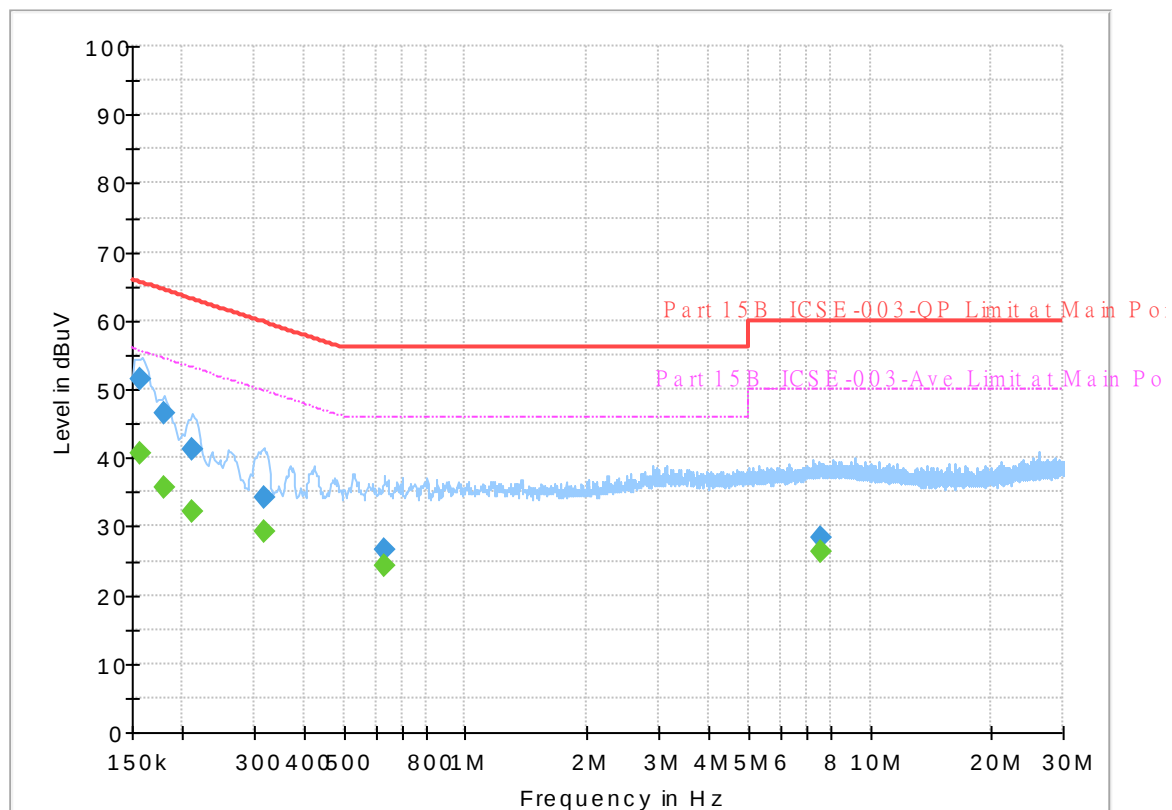

Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.156750	---	40.51	55.63	15.12	N	OFF	19.8
0.156750	51.53	---	65.63	14.10	N	OFF	19.8
0.179250	---	35.79	54.52	18.73	N	OFF	19.8
0.179250	46.58	---	64.52	17.94	N	OFF	19.8
0.210750	---	32.19	53.18	20.99	N	OFF	19.8
0.210750	41.37	---	63.18	21.81	N	OFF	19.8
0.316500	---	29.26	49.80	20.54	N	OFF	19.8
0.316500	34.24	---	59.80	25.56	N	OFF	19.8
0.629250	---	24.24	46.00	21.76	N	OFF	19.8
0.629250	26.49	---	56.00	29.51	N	OFF	19.8
7.581750	---	26.36	50.00	23.64	N	OFF	20.2
7.581750	28.42	---	60.00	31.58	N	OFF	20.2



Appendix C. Radiated Spurious Emission Test Data

Test Engineer :	Ken Kuo, Karl Hou and York Hung	Temperature :	21.5~24.9℃
		Relative Humidity :	50.1~60.9%

Note symbol

-L	Low channel location
-R	High channel location

C1. Radiated Spurious Emission Test Modes

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	2400-2483.5	6	Bluetooth BR_GFSK	00	2402	3Mbps	-	-
Mode 2	2400-2483.5	6	Bluetooth BR_GFSK	39	2441	3Mbps	-	-
Mode 3	2400-2483.5	6	Bluetooth BR_GFSK	78	2480	3Mbps	-	-
Mode 41	2400-2483.5	6	Bluetooth BR_GFSK	39	2441	3Mbps	-	LF
Mode 4	2400-2483.5	7	Bluetooth BR_GFSK	00	2402	3Mbps	-	-
Mode 5	2400-2483.5	7	Bluetooth BR_GFSK	39	2441	3Mbps	-	-
Mode 6	2400-2483.5	7	Bluetooth BR_GFSK	78	2480	3Mbps	-	-
Mode 42	2400-2483.5	7	Bluetooth BR_GFSK	78	2480	3Mbps	-	LF



**C2. Summary of each worse mode****<Ant.6>**

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
1	Bluetooth BR_GFSK	00	2315.52	40.46	74.00	-33.54	H	Peak	Pass	-	Band Edge
	Bluetooth BR_GFSK	00	4804.00	44.78	74.00	-29.22	H	Peak	Pass	-	Harmonic
2	Bluetooth BR_GFSK	39	2361.08	40.55	74.00	-33.45	H	Peak	Pass	-	Band Edge
	Bluetooth BR_GFSK	39	7323.00	48.33	74.00	-25.67	H	Peak	Pass	-	Harmonic
3	Bluetooth BR_GFSK	78	2483.68	45.74	74.00	-28.26	V	Peak	Pass	-	Band Edge
	Bluetooth BR_GFSK	78	7440.00	48.16	74.00	-25.84	H	Peak	Pass	-	Harmonic
41	LF	39	34.85	33.91	40.00	-6.09	V	QP	Pass	-	LF

<Ant.7>

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
4	Bluetooth BR_GFSK	00	2343.12	40.77	74.00	-33.23	H	Peak	Pass	-	Band Edge
	Bluetooth BR_GFSK	00	4804.00	45.59	74.00	-28.41	V	Peak	Pass	-	Harmonic
5	Bluetooth BR_GFSK	39	2373.49	40.77	74.00	-33.23	V	Peak	Pass	-	Band Edge
	Bluetooth BR_GFSK	39	7323.00	49.79	74.00	-24.21	H	Peak	Pass	-	Harmonic
6	Bluetooth BR_GFSK	78	2483.62	45.55	74.00	-28.45	H	Peak	Pass	-	Band Edge
	Bluetooth BR_GFSK	78	7440.00	49.92	74.00	-24.08	V	Peak	Pass	-	Harmonic
42	LF	78	34.85	31.11	40.00	-8.89	V	QP	Pass	-	LF

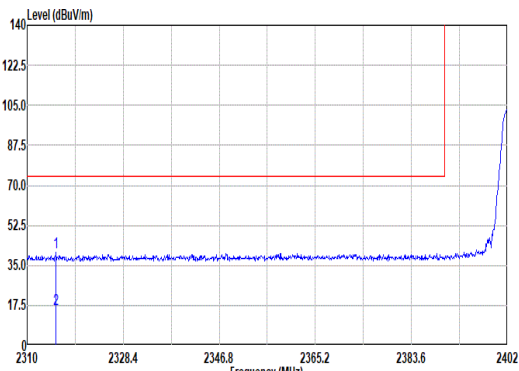
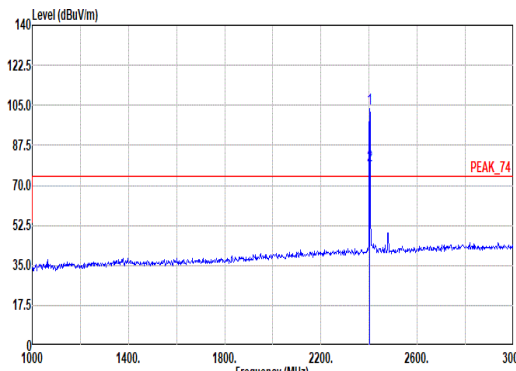


Mode	1																																																																																																					
	Band Edge																																																																																																					
	2400-2483.5_Bluetooth BR_GFSK_CH00_2402MHz																																																																																																					
ANT	6																																																																																																					
Pol.	Horizontal	Fundamental																																																																																																				
Peak	 Site : 03CH22-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C04A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr><tr><td>1</td><td>2315.52</td><td>40.46</td><td>74.00</td><td>-33.54</td><td>37.51</td><td>27.00</td><td>8.49</td><td>32.54</td><td>0.00 100 310 PEAK</td></tr><tr><td>2</td><td>2315.52</td><td>15.70</td><td>54.00</td><td>-38.30</td><td>--</td><td>--</td><td>--</td><td>--</td><td>100 310 AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1	2315.52	40.46	74.00	-33.54	37.51	27.00	8.49	32.54	0.00 100 310 PEAK	2	2315.52	15.70	54.00	-38.30	--	--	--	--	100 310 AVERAGE	 Site : 03CH22-HY Condition: PEAK_74 3m DRH18-E_LE2C04A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr><tr><td>1</td><td>2402.00</td><td>103.33</td><td>-----</td><td>-----</td><td>100.46</td><td>26.82</td><td>8.65</td><td>32.60</td><td>0.00 100 310 PEAK</td></tr><tr><td>2</td><td>2402.00</td><td>78.57</td><td>-----</td><td>-----</td><td>--</td><td>--</td><td>--</td><td>--</td><td>100 310 AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1	2402.00	103.33	-----	-----	100.46	26.82	8.65	32.60	0.00 100 310 PEAK	2	2402.00	78.57	-----	-----	--	--	--	--	100 310 AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																														
1	2315.52	40.46	74.00	-33.54	37.51	27.00	8.49	32.54	0.00 100 310 PEAK																																																																																													
2	2315.52	15.70	54.00	-38.30	--	--	--	--	100 310 AVERAGE																																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																														
1	2402.00	103.33	-----	-----	100.46	26.82	8.65	32.60	0.00 100 310 PEAK																																																																																													
2	2402.00	78.57	-----	-----	--	--	--	--	100 310 AVERAGE																																																																																													





Mode	1																																																																																																															
	Band Edge																																																																																																															
	2400-2483.5_Bluetooth BR_GFSK_CH00_2402MHz																																																																																																															
ANT	6																																																																																																															
Pol.	Vertical	Fundamental																																																																																																														
Peak	Site : 03CH22-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C04A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2314.78</td><td>40.40</td><td>74.00</td><td>-33.60</td><td>37.45</td><td>27.00</td><td>8.49</td><td>32.54</td><td>0.00</td><td>131</td><td>1 PEAK</td></tr><tr><td>2</td><td>2314.78</td><td>15.64</td><td>54.00</td><td>-38.36</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>131</td><td>1 AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2314.78	40.40	74.00	-33.60	37.45	27.00	8.49	32.54	0.00	131	1 PEAK	2	2314.78	15.64	54.00	-38.36	--	--	--	--	--	131	1 AVERAGE	Site : 03CH22-HY Condition: PEAK_74 3m DRH18-E_LE2C04A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2402.00</td><td>106.46</td><td>-----</td><td>-----</td><td>103.59</td><td>26.82</td><td>8.65</td><td>32.60</td><td>0.00</td><td>131</td><td>1 PEAK</td></tr><tr><td>2</td><td>2402.00</td><td>81.70</td><td>-----</td><td>-----</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>131</td><td>1 AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	106.46	-----	-----	103.59	26.82	8.65	32.60	0.00	131	1 PEAK	2	2402.00	81.70	-----	-----	--	--	--	--	--	131	1 AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																						
1	2314.78	40.40	74.00	-33.60	37.45	27.00	8.49	32.54	0.00	131	1 PEAK																																																																																																					
2	2314.78	15.64	54.00	-38.36	--	--	--	--	--	131	1 AVERAGE																																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																						
1	2402.00	106.46	-----	-----	103.59	26.82	8.65	32.60	0.00	131	1 PEAK																																																																																																					
2	2402.00	81.70	-----	-----	--	--	--	--	--	131	1 AVERAGE																																																																																																					

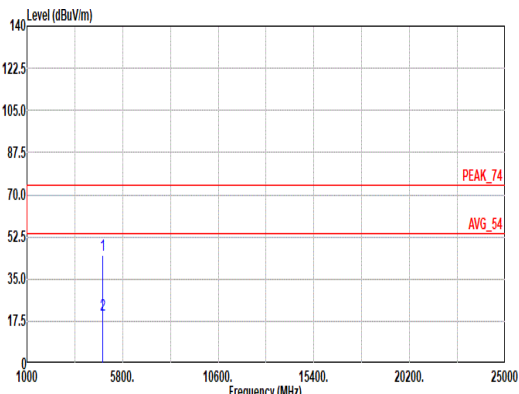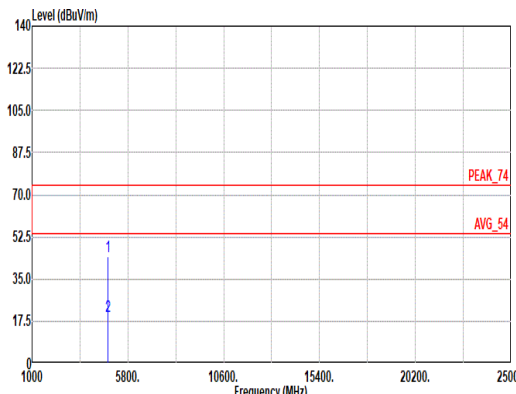


Mode	1																																																																					
	Harmonic																																																																					
	2400-2483.5_Bluetooth BR_GFSK_CH00_2402MHz																																																																					
ANT	6																																																																					
Pol.	Horizontal						Vertical																																																															
Peak Avg																																																																						
	Site : 03CH22-HY Condition: PEAK_74 3m DRH18-E_LE2C04A18EN_240711 HORIZONTAL						Site : 03CH22-HY Condition: PEAK_74 3m DRH18-E_LE2C04A18EN_240711 VERTICAL																																																															
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4804.00</td><td>44.78</td><td>74.00</td><td>-29.22</td><td>32.91</td><td>32.40</td><td>12.42</td><td>33.67</td><td>0.72</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>4804.00</td><td>20.02</td><td>54.00</td><td>-33.98</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>Average</td></tr></table>															Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4804.00	44.78	74.00	-29.22	32.91	32.40	12.42	33.67	0.72	--	--	PEAK	2	4804.00	20.02	54.00	-33.98	--	--	--	--	--	--	--	Average
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																												
1	4804.00	44.78	74.00	-29.22	32.91	32.40	12.42	33.67	0.72	--	--	PEAK																																																										
2	4804.00	20.02	54.00	-33.98	--	--	--	--	--	--	--	Average																																																										

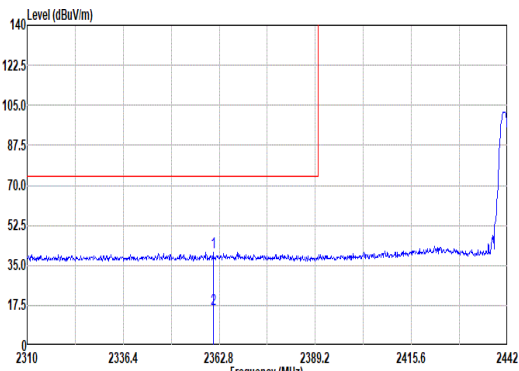
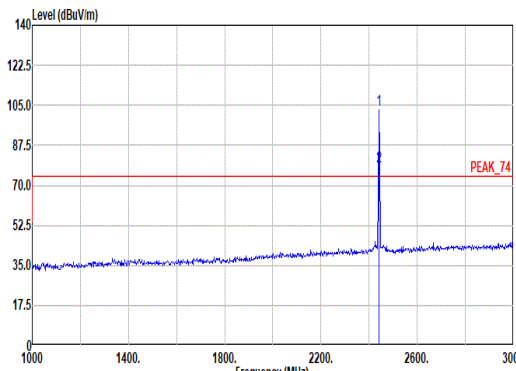


Mode	2																																																																																																					
	Band Edge - L																																																																																																					
	2400-2483.5_Bluetooth BR_GFSK_CH39_2441MHz																																																																																																					
ANT	6																																																																																																					
Pol.	Horizontal	Fundamental																																																																																																				
Peak	 Site : 03CH22-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C04A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr></thead><tbody><tr><td>1</td><td>2361.00</td><td>40.55</td><td>74.00</td><td>-33.45</td><td>37.54</td><td>27.00</td><td>8.58</td><td>32.57</td><td>0.00 106 309 PEAK</td></tr><tr><td>2</td><td>2361.00</td><td>15.79</td><td>54.00</td><td>-38.21</td><td>--</td><td>--</td><td>--</td><td>--</td><td>106 309 AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1	2361.00	40.55	74.00	-33.45	37.54	27.00	8.58	32.57	0.00 106 309 PEAK	2	2361.00	15.79	54.00	-38.21	--	--	--	--	106 309 AVERAGE	 Site : 03CH22-HY Condition: PEAK_74 3m DRH18-E_LE2C04A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr></thead><tbody><tr><td>1</td><td>2441.00</td><td>102.81</td><td>-----</td><td>-----</td><td>99.98</td><td>26.72</td><td>8.73</td><td>32.62</td><td>0.00 106 309 PEAK</td></tr><tr><td>2</td><td>2441.00</td><td>78.05</td><td>-----</td><td>-----</td><td>--</td><td>--</td><td>--</td><td>--</td><td>106 309 AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1	2441.00	102.81	-----	-----	99.98	26.72	8.73	32.62	0.00 106 309 PEAK	2	2441.00	78.05	-----	-----	--	--	--	--	106 309 AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																														
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																														
1	2361.00	40.55	74.00	-33.45	37.54	27.00	8.58	32.57	0.00 106 309 PEAK																																																																																													
2	2361.00	15.79	54.00	-38.21	--	--	--	--	106 309 AVERAGE																																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																														
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																														
1	2441.00	102.81	-----	-----	99.98	26.72	8.73	32.62	0.00 106 309 PEAK																																																																																													
2	2441.00	78.05	-----	-----	--	--	--	--	106 309 AVERAGE																																																																																													

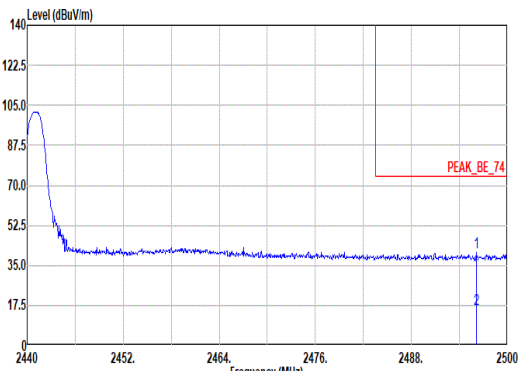


Mode	2																																																									
	Band Edge - R																																																									
	2400-2483.5_Bluetooth BR_GFSK_CH39_2441MHz																																																									
ANT	6																																																									
Pol.	Horizontal	Fundamental																																																								
Peak	 Site : 03CH22-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C04A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2496.10</td><td>40.43</td><td>74.00</td><td>-33.57</td><td></td><td>37.56</td><td>26.70</td><td>8.83</td><td>32.66</td><td>0.00</td><td>106</td><td>309</td><td>PEAK</td></tr><tr><td>2</td><td>2496.10</td><td>15.67</td><td>54.00</td><td>-38.33</td><td></td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>106</td><td>309</td><td>AVERAGE</td></tr></table>		Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2496.10	40.43	74.00	-33.57		37.56	26.70	8.83	32.66	0.00	106	309	PEAK	2	2496.10	15.67	54.00	-38.33		--	--	--	--	--	106	309	AVERAGE	Blank
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																													
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																														
1	2496.10	40.43	74.00	-33.57		37.56	26.70	8.83	32.66	0.00	106	309	PEAK																																													
2	2496.10	15.67	54.00	-38.33		--	--	--	--	--	106	309	AVERAGE																																													

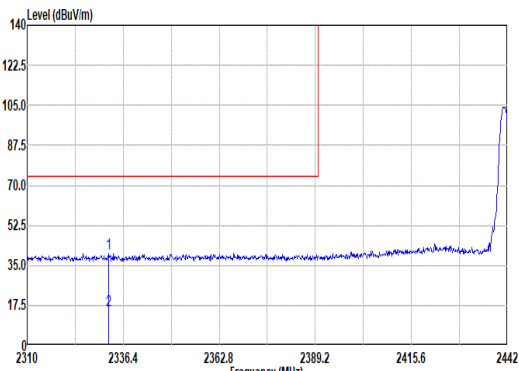
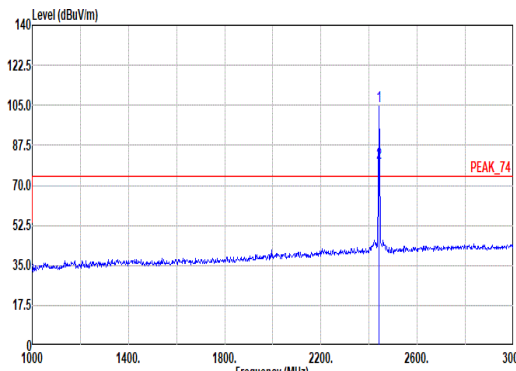


Mode	2																																																																																																															
	Band Edge - L																																																																																																															
	2400-2483.5_Bluetooth BR_GFSK_CH39_2441MHz																																																																																																															
ANT	6																																																																																																															
Pol.	Vertical	Fundamental																																																																																																														
Peak	 Site : 03CH22-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C04A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2332.31</td><td>39.99</td><td>74.00</td><td>-34.01</td><td>37.04</td><td>26.98</td><td>8.52</td><td>32.55</td><td>0.00</td><td>173</td><td>0 PEAK</td></tr><tr><td>2</td><td>2332.31</td><td>15.23</td><td>54.00</td><td>-38.77</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>173</td><td>0 AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2332.31	39.99	74.00	-34.01	37.04	26.98	8.52	32.55	0.00	173	0 PEAK	2	2332.31	15.23	54.00	-38.77	--	--	--	--	--	173	0 AVERAGE	 Site : 03CH22-HY Condition: PEAK_74 3m DRH18-E_LE2C04A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2441.00</td><td>104.60</td><td>-----</td><td>-----</td><td>101.77</td><td>26.72</td><td>8.73</td><td>32.62</td><td>0.00</td><td>173</td><td>0 PEAK</td></tr><tr><td>2</td><td>2441.00</td><td>79.84</td><td>-----</td><td>-----</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>173</td><td>0 AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2441.00	104.60	-----	-----	101.77	26.72	8.73	32.62	0.00	173	0 PEAK	2	2441.00	79.84	-----	-----	--	--	--	--	--	173	0 AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																						
1	2332.31	39.99	74.00	-34.01	37.04	26.98	8.52	32.55	0.00	173	0 PEAK																																																																																																					
2	2332.31	15.23	54.00	-38.77	--	--	--	--	--	173	0 AVERAGE																																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																						
1	2441.00	104.60	-----	-----	101.77	26.72	8.73	32.62	0.00	173	0 PEAK																																																																																																					
2	2441.00	79.84	-----	-----	--	--	--	--	--	173	0 AVERAGE																																																																																																					


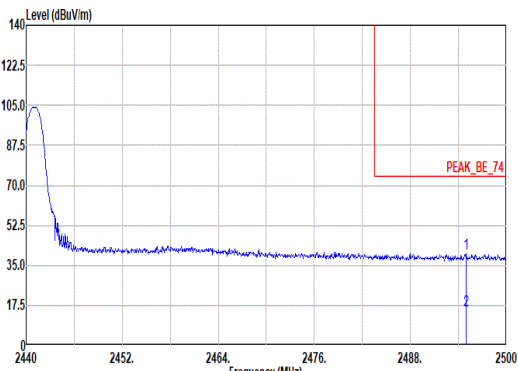


Mode	2																																																									
	Band Edge - R																																																									
	2400-2483.5_Bluetooth BR_GFSK_CH39_2441MHz																																																									
ANT	6																																																									
Pol.	Vertical	Fundamental																																																								
Peak	 Site : 03CH22-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C04A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2494.96</td><td>40.27</td><td>74.00</td><td>-33.73</td><td></td><td>37.40</td><td>26.70</td><td>8.83</td><td>32.66</td><td>0.00</td><td>173</td><td>0</td><td>PEAK</td></tr><tr><td>2</td><td>2494.96</td><td>15.51</td><td>54.00</td><td>-38.49</td><td></td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>173</td><td>0</td><td>AVERAGE</td></tr></table>		Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB		dBuV	dB/m	dB	dB	dB	cm	deg		1	2494.96	40.27	74.00	-33.73		37.40	26.70	8.83	32.66	0.00	173	0	PEAK	2	2494.96	15.51	54.00	-38.49		--	--	--	--	--	173	0	AVERAGE	Blank
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																													
	MHz	dBuV/m	dBuV/m	dB		dBuV	dB/m	dB	dB	dB	cm	deg																																														
1	2494.96	40.27	74.00	-33.73		37.40	26.70	8.83	32.66	0.00	173	0	PEAK																																													
2	2494.96	15.51	54.00	-38.49		--	--	--	--	--	173	0	AVERAGE																																													

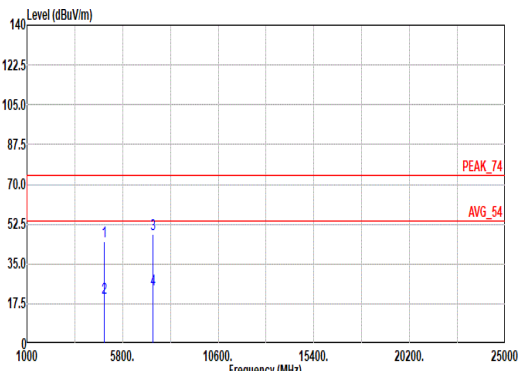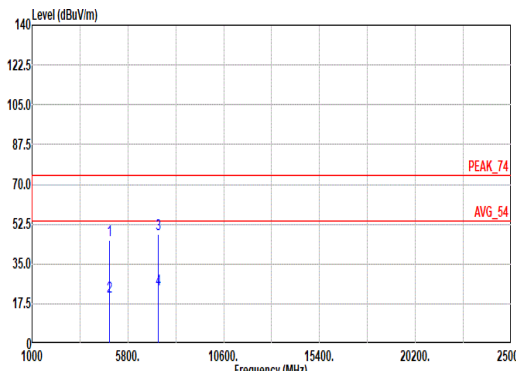

Mode	2																																																																																									
	Harmonic																																																																																									
	2400-2483.5_Bluetooth BR_GFSK_CH39_2441MHz																																																																																									
ANT	6																																																																																									
Pol.	Horizontal																																																																																									
Peak Avg	 Site : 03CH22-HY Condition: PEAK_74 3m DRH18-E_LE2C04A18EN_240711 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4882.00</td><td>45.09</td><td>74.00</td><td>-28.91</td><td>33.11</td><td>32.46</td><td>12.49</td><td>33.67</td><td>0.70</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>4882.00</td><td>20.33</td><td>54.00</td><td>-33.67</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>Average</td></tr><tr><td>3</td><td>7323.00</td><td>48.33</td><td>74.00</td><td>-25.67</td><td>31.69</td><td>37.20</td><td>15.41</td><td>36.61</td><td>0.64</td><td>--</td><td>PEAK</td></tr><tr><td>4</td><td>7323.00</td><td>23.57</td><td>54.00</td><td>-30.43</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>Average</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4882.00	45.09	74.00	-28.91	33.11	32.46	12.49	33.67	0.70	--	PEAK	2	4882.00	20.33	54.00	-33.67	--	--	--	--	--	--	Average	3	7323.00	48.33	74.00	-25.67	31.69	37.20	15.41	36.61	0.64	--	PEAK	4	7323.00	23.57	54.00	-30.43	--	--	--	--	--	--	Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	4882.00	45.09	74.00	-28.91	33.11	32.46	12.49	33.67	0.70	--	PEAK																																																																															
2	4882.00	20.33	54.00	-33.67	--	--	--	--	--	--	Average																																																																															
3	7323.00	48.33	74.00	-25.67	31.69	37.20	15.41	36.61	0.64	--	PEAK																																																																															
4	7323.00	23.57	54.00	-30.43	--	--	--	--	--	--	Average																																																																															
Peak Avg	 Site : 03CH22-HY Condition: PEAK_74 3m DRH18-E_LE2C04A18EN_240711 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4882.00</td><td>45.46</td><td>74.00</td><td>-28.54</td><td>33.48</td><td>32.46</td><td>12.49</td><td>33.67</td><td>0.70</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>4882.00</td><td>20.70</td><td>54.00</td><td>-33.30</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>Average</td></tr><tr><td>3</td><td>7323.00</td><td>48.28</td><td>74.00</td><td>-25.72</td><td>31.64</td><td>37.20</td><td>15.41</td><td>36.61</td><td>0.64</td><td>--</td><td>PEAK</td></tr><tr><td>4</td><td>7323.00</td><td>23.52</td><td>54.00</td><td>-30.48</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>Average</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4882.00	45.46	74.00	-28.54	33.48	32.46	12.49	33.67	0.70	--	PEAK	2	4882.00	20.70	54.00	-33.30	--	--	--	--	--	--	Average	3	7323.00	48.28	74.00	-25.72	31.64	37.20	15.41	36.61	0.64	--	PEAK	4	7323.00	23.52	54.00	-30.48	--	--	--	--	--	--	Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	4882.00	45.46	74.00	-28.54	33.48	32.46	12.49	33.67	0.70	--	PEAK																																																																															
2	4882.00	20.70	54.00	-33.30	--	--	--	--	--	--	Average																																																																															
3	7323.00	48.28	74.00	-25.72	31.64	37.20	15.41	36.61	0.64	--	PEAK																																																																															
4	7323.00	23.52	54.00	-30.48	--	--	--	--	--	--	Average																																																																															

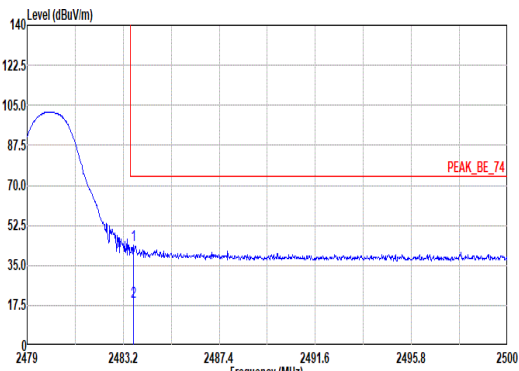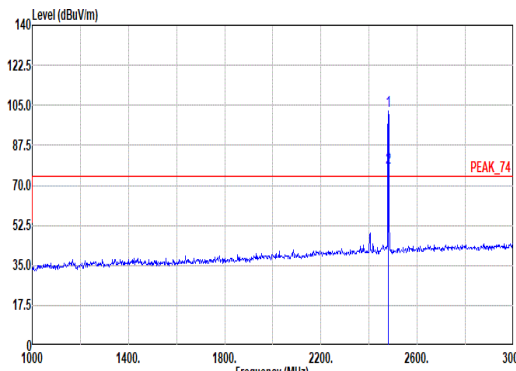


Mode	3																																																																																																																			
	Band Edge																																																																																																																			
	2400-2483.5_Bluetooth BR_GFSK_CH78_2480MHz																																																																																																																			
ANT	6																																																																																																																			
Pol.	Horizontal	Fundamental																																																																																																																		
Peak	 Site : 03CH22-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C04A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.64</td><td>43.94</td><td>74.00</td><td>-30.06</td><td>41.09</td><td>26.70</td><td>8.80</td><td>32.65</td><td>0.00</td><td>100</td><td>321</td><td>PEAK</td></tr><tr><td>2</td><td>2483.64</td><td>19.18</td><td>54.00</td><td>-34.82</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>100</td><td>321</td><td>AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.64	43.94	74.00	-30.06	41.09	26.70	8.80	32.65	0.00	100	321	PEAK	2	2483.64	19.18	54.00	-34.82	--	--	--	--	--	100	321	AVERAGE	 Site : 03CH22-HY Condition: PEAK_74 3m DRH18-E_LE2C04A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>102.42</td><td>-----</td><td>-----</td><td>99.57</td><td>26.70</td><td>8.80</td><td>32.65</td><td>0.00</td><td>100</td><td>321</td><td>PEAK</td></tr><tr><td>2</td><td>2480.00</td><td>77.66</td><td>-----</td><td>-----</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>100</td><td>321</td><td>AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	102.42	-----	-----	99.57	26.70	8.80	32.65	0.00	100	321	PEAK	2	2480.00	77.66	-----	-----	--	--	--	--	--	100	321	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																										
1	2483.64	43.94	74.00	-30.06	41.09	26.70	8.80	32.65	0.00	100	321	PEAK																																																																																																								
2	2483.64	19.18	54.00	-34.82	--	--	--	--	--	100	321	AVERAGE																																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																										
1	2480.00	102.42	-----	-----	99.57	26.70	8.80	32.65	0.00	100	321	PEAK																																																																																																								
2	2480.00	77.66	-----	-----	--	--	--	--	--	100	321	AVERAGE																																																																																																								





Mode	3																																																																																																															
	Band Edge																																																																																																															
	2400-2483.5_Bluetooth BR_GFSK_CH78_2480MHz																																																																																																															
ANT	6																																																																																																															
Pol.	Vertical	Fundamental																																																																																																														
Peak	Site : 03CH22-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C04A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.68</td><td>45.74</td><td>74.00</td><td>-28.26</td><td>42.89</td><td>26.70</td><td>8.80</td><td>32.65</td><td>0.00</td><td>231</td><td>0 PEAK</td></tr><tr><td>2</td><td>2483.68</td><td>20.98</td><td>54.00</td><td>-33.02</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>231</td><td>0 AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.68	45.74	74.00	-28.26	42.89	26.70	8.80	32.65	0.00	231	0 PEAK	2	2483.68	20.98	54.00	-33.02	--	--	--	--	--	231	0 AVERAGE	Site : 03CH22-HY Condition: PEAK_74 3m DRH18-E_LE2C04A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>104.18</td><td>-----</td><td>-----</td><td>101.33</td><td>26.70</td><td>8.80</td><td>32.65</td><td>0.00</td><td>231</td><td>0 PEAK</td></tr><tr><td>2</td><td>2480.00</td><td>79.42</td><td>-----</td><td>-----</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>231</td><td>0 AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	104.18	-----	-----	101.33	26.70	8.80	32.65	0.00	231	0 PEAK	2	2480.00	79.42	-----	-----	--	--	--	--	--	231	0 AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																							
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																						
1	2483.68	45.74	74.00	-28.26	42.89	26.70	8.80	32.65	0.00	231	0 PEAK																																																																																																					
2	2483.68	20.98	54.00	-33.02	--	--	--	--	--	231	0 AVERAGE																																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																							
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																						
1	2480.00	104.18	-----	-----	101.33	26.70	8.80	32.65	0.00	231	0 PEAK																																																																																																					
2	2480.00	79.42	-----	-----	--	--	--	--	--	231	0 AVERAGE																																																																																																					


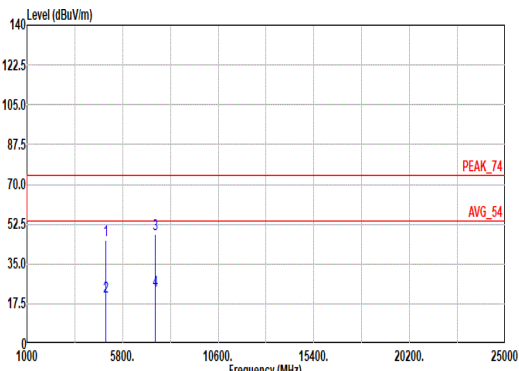


Mode	3												
	Harmonic												
	2400-2483.5_Bluetooth BR_GFSK_CH78_2480MHz												
ANT	6												
Pol.	Horizontal												
Peak Avg													
	Site : 03CH22-HY Condition: PEAK_74 3m DRH18-E_LE2C04A18EN_240711 HORIZONTAL												
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB		dBuV	dB/m	dB	dB	dB	cm	deg	
1	4960.00	45.51	74.00	-28.49		33.23	32.70	12.56	33.67	0.69	--	--	PEAK
2	4960.00	20.75	54.00	-33.25	--	--	--	--	--	--	--	--	Average
3	7440.00	48.16	74.00	-25.84		31.51	37.26	15.55	36.79	0.63	--	--	PEAK
4	7440.00	23.40	54.00	-30.60	--	--	--	--	--	--	--	--	Average
	Site : 03CH22-HY Condition: PEAK_74 3m DRH18-E_LE2C04A18EN_240711 VERTICAL												
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB		dBuV	dB/m	dB	dB	dB	cm	deg	
1	4960.00	45.22	74.00	-28.78		32.94	32.70	12.56	33.67	0.69	--	--	PEAK
2	4960.00	20.46	54.00	-33.54	--	--	--	--	--	--	--	--	Average
3	7440.00	48.00	74.00	-26.00		31.35	37.26	15.55	36.79	0.63	--	--	PEAK
4	7440.00	23.24	54.00	-30.76	--	--	--	--	--	--	--	--	Average

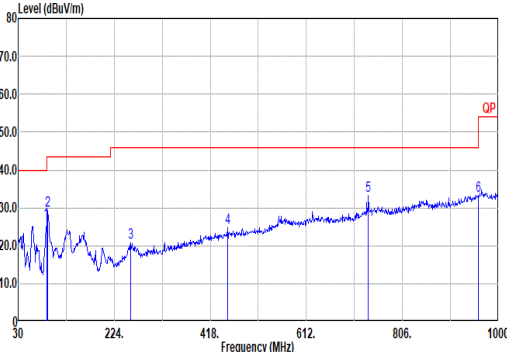
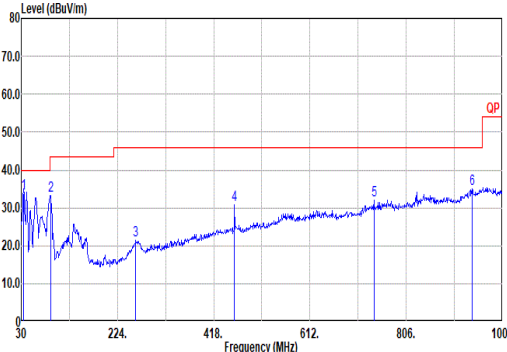


Mode	41																																																																																																				
	LF																																																																																																				
	2400-2483.5_Bluetooth BR_GFSK_CH39_2441MHz																																																																																																				
ANT	6																																																																																																				
Pol.	Horizontal						Vertical																																																																																														
QPI Peak																																																																																																					
	Site : 03CH22-HY Condition: QP 3m Bilog_47020_241005 HORIZONTAL																																																																																																				
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1</td><td>87.23</td><td>26.16</td><td>40.00</td><td>-13.84</td><td>42.57</td><td>14.52</td><td>1.67</td><td>32.69</td><td>0.09 -- -- Peak</td></tr><tr><td>2</td><td>98.14</td><td>29.15</td><td>43.50</td><td>-14.35</td><td>45.12</td><td>14.93</td><td>1.70</td><td>32.69</td><td>0.09 -- -- Peak</td></tr><tr><td>3</td><td>257.95</td><td>20.87</td><td>46.00</td><td>-25.13</td><td>30.73</td><td>19.86</td><td>2.85</td><td>32.62</td><td>0.05 -- -- Peak</td></tr><tr><td>4</td><td>452.92</td><td>24.83</td><td>46.00</td><td>-21.17</td><td>30.50</td><td>23.21</td><td>3.81</td><td>32.78</td><td>0.09 -- -- Peak</td></tr><tr><td>5</td><td>737.13</td><td>33.08</td><td>46.00</td><td>-12.92</td><td>32.66</td><td>28.19</td><td>4.79</td><td>32.68</td><td>0.12 -- -- Peak</td></tr><tr><td>6</td><td>959.26</td><td>33.24</td><td>46.00</td><td>-12.76</td><td>27.57</td><td>31.27</td><td>5.44</td><td>31.25</td><td>0.21 -- -- Peak</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1	87.23	26.16	40.00	-13.84	42.57	14.52	1.67	32.69	0.09 -- -- Peak	2	98.14	29.15	43.50	-14.35	45.12	14.93	1.70	32.69	0.09 -- -- Peak	3	257.95	20.87	46.00	-25.13	30.73	19.86	2.85	32.62	0.05 -- -- Peak	4	452.92	24.83	46.00	-21.17	30.50	23.21	3.81	32.78	0.09 -- -- Peak	5	737.13	33.08	46.00	-12.92	32.66	28.19	4.79	32.68	0.12 -- -- Peak	6	959.26	33.24	46.00	-12.76	27.57	31.27	5.44	31.25
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																												
1	87.23	26.16	40.00	-13.84	42.57	14.52	1.67	32.69	0.09 -- -- Peak																																																																																												
2	98.14	29.15	43.50	-14.35	45.12	14.93	1.70	32.69	0.09 -- -- Peak																																																																																												
3	257.95	20.87	46.00	-25.13	30.73	19.86	2.85	32.62	0.05 -- -- Peak																																																																																												
4	452.92	24.83	46.00	-21.17	30.50	23.21	3.81	32.78	0.09 -- -- Peak																																																																																												
5	737.13	33.08	46.00	-12.92	32.66	28.19	4.79	32.68	0.12 -- -- Peak																																																																																												
6	959.26	33.24	46.00	-12.76	27.57	31.27	5.44	31.25	0.21 -- -- Peak																																																																																												
Site : 03CH22-HY Condition: QP 3m Bilog_47020_241005 VERTICAL																																																																																																					
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1</td><td>34.85</td><td>33.91</td><td>40.00</td><td>-6.09</td><td>43.13</td><td>22.35</td><td>1.06</td><td>32.66</td><td>0.03 100 121 QP</td></tr><tr><td>2</td><td>89.17</td><td>33.19</td><td>43.50</td><td>-10.31</td><td>49.24</td><td>14.86</td><td>1.69</td><td>32.69</td><td>0.09 -- -- Peak</td></tr><tr><td>3</td><td>260.86</td><td>21.32</td><td>46.00</td><td>-24.68</td><td>30.85</td><td>20.17</td><td>2.87</td><td>32.62</td><td>0.05 -- -- Peak</td></tr><tr><td>4</td><td>459.71</td><td>30.94</td><td>46.00</td><td>-15.06</td><td>36.56</td><td>23.22</td><td>3.83</td><td>32.78</td><td>0.11 -- -- Peak</td></tr><tr><td>5</td><td>741.01</td><td>32.01</td><td>46.00</td><td>-13.99</td><td>31.44</td><td>28.31</td><td>4.80</td><td>32.66</td><td>0.12 -- -- Peak</td></tr><tr><td>6</td><td>938.89</td><td>34.99</td><td>46.00</td><td>-11.01</td><td>30.18</td><td>30.70</td><td>5.39</td><td>31.45</td><td>0.17 -- -- Peak</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1	34.85	33.91	40.00	-6.09	43.13	22.35	1.06	32.66	0.03 100 121 QP	2	89.17	33.19	43.50	-10.31	49.24	14.86	1.69	32.69	0.09 -- -- Peak	3	260.86	21.32	46.00	-24.68	30.85	20.17	2.87	32.62	0.05 -- -- Peak	4	459.71	30.94	46.00	-15.06	36.56	23.22	3.83	32.78	0.11 -- -- Peak	5	741.01	32.01	46.00	-13.99	31.44	28.31	4.80	32.66	0.12 -- -- Peak	6	938.89	34.99	46.00	-11.01	30.18	30.70	5.39	31.45	0.17 -- -- Peak
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																												
1	34.85	33.91	40.00	-6.09	43.13	22.35	1.06	32.66	0.03 100 121 QP																																																																																												
2	89.17	33.19	43.50	-10.31	49.24	14.86	1.69	32.69	0.09 -- -- Peak																																																																																												
3	260.86	21.32	46.00	-24.68	30.85	20.17	2.87	32.62	0.05 -- -- Peak																																																																																												
4	459.71	30.94	46.00	-15.06	36.56	23.22	3.83	32.78	0.11 -- -- Peak																																																																																												
5	741.01	32.01	46.00	-13.99	31.44	28.31	4.80	32.66	0.12 -- -- Peak																																																																																												
6	938.89	34.99	46.00	-11.01	30.18	30.70	5.39	31.45	0.17 -- -- Peak																																																																																												

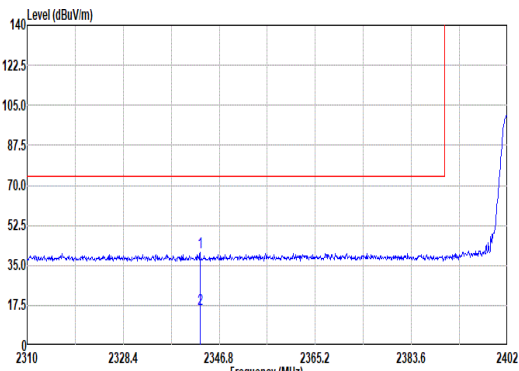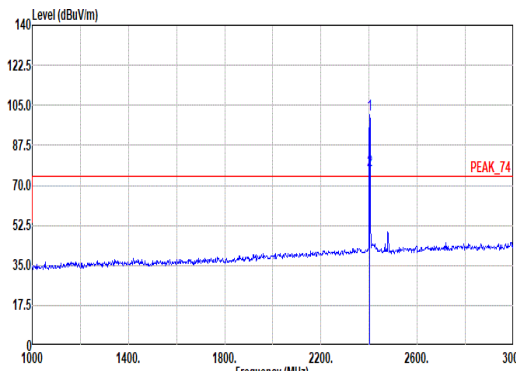

Mode	4																																																																																																																			
	Band Edge																																																																																																																			
	2400-2483.5_Bluetooth BR_GFSK_CH00_2402MHz																																																																																																																			
ANT	7																																																																																																																			
Pol.	Horizontal	Fundamental																																																																																																																		
Peak	 Site : 03CH22-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C04A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2343.12</td><td>40.77</td><td>74.00</td><td>-33.23</td><td>37.89</td><td>26.90</td><td>8.54</td><td>32.56</td><td>0.00</td><td>103</td><td>256</td><td>PEAK</td></tr><tr><td>2</td><td>2343.12</td><td>16.01</td><td>54.00</td><td>-37.99</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>103</td><td>256</td><td>AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2343.12	40.77	74.00	-33.23	37.89	26.90	8.54	32.56	0.00	103	256	PEAK	2	2343.12	16.01	54.00	-37.99	--	--	--	--	--	103	256	AVERAGE	 Site : 03CH22-HY Condition: PEAK_74 3m DRH18-E_LE2C04A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2402.00</td><td>101.16</td><td>-----</td><td>-----</td><td>98.29</td><td>26.82</td><td>8.65</td><td>32.60</td><td>0.00</td><td>103</td><td>256</td><td>PEAK</td></tr><tr><td>2</td><td>2402.00</td><td>76.40</td><td>-----</td><td>-----</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>103</td><td>256</td><td>AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	101.16	-----	-----	98.29	26.82	8.65	32.60	0.00	103	256	PEAK	2	2402.00	76.40	-----	-----	--	--	--	--	--	103	256	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																										
1	2343.12	40.77	74.00	-33.23	37.89	26.90	8.54	32.56	0.00	103	256	PEAK																																																																																																								
2	2343.12	16.01	54.00	-37.99	--	--	--	--	--	103	256	AVERAGE																																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																										
1	2402.00	101.16	-----	-----	98.29	26.82	8.65	32.60	0.00	103	256	PEAK																																																																																																								
2	2402.00	76.40	-----	-----	--	--	--	--	--	103	256	AVERAGE																																																																																																								

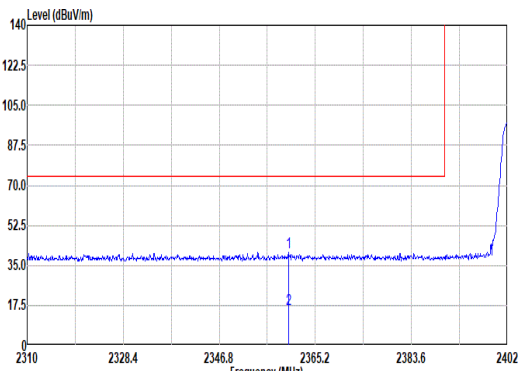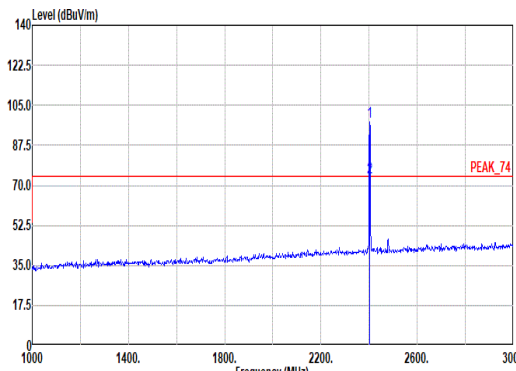

Mode	4																																																																																																																			
	Band Edge																																																																																																																			
	2400-2483.5_Bluetooth BR_GFSK_CH00_2402MHz																																																																																																																			
ANT	7																																																																																																																			
Pol.	Vertical	Fundamental																																																																																																																		
Peak	 Site : 03CH22-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C04A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2360.05</td><td>40.56</td><td>74.00</td><td>-33.44</td><td>37.55</td><td>27.00</td><td>8.58</td><td>32.57</td><td>0.00</td><td>332</td><td>284</td><td>PEAK</td></tr><tr><td>2</td><td>2360.05</td><td>15.80</td><td>54.00</td><td>-38.20</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>332</td><td>284</td><td>AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2360.05	40.56	74.00	-33.44	37.55	27.00	8.58	32.57	0.00	332	284	PEAK	2	2360.05	15.80	54.00	-38.20	--	--	--	--	--	332	284	AVERAGE	 Site : 03CH22-HY Condition: PEAK_74 3m DRH18-E_LE2C04A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2402.00</td><td>97.99</td><td>-----</td><td>-----</td><td>95.12</td><td>26.82</td><td>8.65</td><td>32.60</td><td>0.00</td><td>332</td><td>284</td><td>PEAK</td></tr><tr><td>2</td><td>2402.00</td><td>73.23</td><td>-----</td><td>-----</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>332</td><td>284</td><td>AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	97.99	-----	-----	95.12	26.82	8.65	32.60	0.00	332	284	PEAK	2	2402.00	73.23	-----	-----	--	--	--	--	--	332	284	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																										
1	2360.05	40.56	74.00	-33.44	37.55	27.00	8.58	32.57	0.00	332	284	PEAK																																																																																																								
2	2360.05	15.80	54.00	-38.20	--	--	--	--	--	332	284	AVERAGE																																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																										
1	2402.00	97.99	-----	-----	95.12	26.82	8.65	32.60	0.00	332	284	PEAK																																																																																																								
2	2402.00	73.23	-----	-----	--	--	--	--	--	332	284	AVERAGE																																																																																																								




Mode	4																																																																	
	Harmonic																																																																	
	2400-2483.5_Bluetooth BR_GFSK_CH00_2402MHz																																																																	
ANT	7																																																																	
Pol.	Horizontal						Vertical																																																											
Peak Avg																																																																		
	Site : 03CH22-HY Condition: PEAK_74 3m DRH18-E_LE2C04A18EN_240711 HORIZONTAL						Site : 03CH22-HY Condition: PEAK_74 3m DRH18-E_LE2C04A18EN_240711 VERTICAL																																																											
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4804.00</td><td>45.09</td><td>74.00</td><td>-28.91</td><td>33.22</td><td>32.40</td><td>12.42</td><td>33.67</td><td>0.72</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>4804.00</td><td>20.33</td><td>54.00</td><td>-33.67</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>Average</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4804.00	45.09	74.00	-28.91	33.22	32.40	12.42	33.67	0.72	--	PEAK	2	4804.00	20.33	54.00	-33.67	--	--	--	--	--	--	Average
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																								
1	4804.00	45.09	74.00	-28.91	33.22	32.40	12.42	33.67	0.72	--	PEAK																																																							
2	4804.00	20.33	54.00	-33.67	--	--	--	--	--	--	Average																																																							





Mode	5																																																																																																																													
	Band Edge - L																																																																																																																													
	2400-2483.5_Bluetooth BR_GFSK_CH39_2441MHz																																																																																																																													
ANT	7																																																																																																																													
Pol.	Horizontal						Fundamental																																																																																																																							
Peak	Site : 03CH22-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C04A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2377.98</td><td>40.42</td><td>74.00</td><td>-33.58</td><td>37.55</td><td>26.84</td><td>8.61</td><td>32.58</td><td>0.00</td><td>100</td><td>257</td><td>PEAK</td></tr><tr><td>2</td><td>2377.98</td><td>15.66</td><td>54.00</td><td>-38.34</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2377.98	40.42	74.00	-33.58	37.55	26.84	8.61	32.58	0.00	100	257	PEAK	2	2377.98	15.66	54.00	-38.34	--	--	--	--	--	--	--	Average	Site : 03CH22-HY Condition: PEAK_74 3m DRH18-E_LE2C04A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2441.00</td><td>103.11</td><td>-----</td><td>-----</td><td>100.28</td><td>26.72</td><td>8.73</td><td>32.62</td><td>0.00</td><td>100</td><td>257</td><td>PEAK</td></tr><tr><td>2</td><td>2441.00</td><td>78.35</td><td>-----</td><td>-----</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2441.00	103.11	-----	-----	100.28	26.72	8.73	32.62	0.00	100	257	PEAK	2	2441.00	78.35	-----	-----	--	--	--	--	--	--	--	Average
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																				
1	2377.98	40.42	74.00	-33.58	37.55	26.84	8.61	32.58	0.00	100	257	PEAK																																																																																																																		
2	2377.98	15.66	54.00	-38.34	--	--	--	--	--	--	--	Average																																																																																																																		
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																				
1	2441.00	103.11	-----	-----	100.28	26.72	8.73	32.62	0.00	100	257	PEAK																																																																																																																		
2	2441.00	78.35	-----	-----	--	--	--	--	--	--	--	Average																																																																																																																		

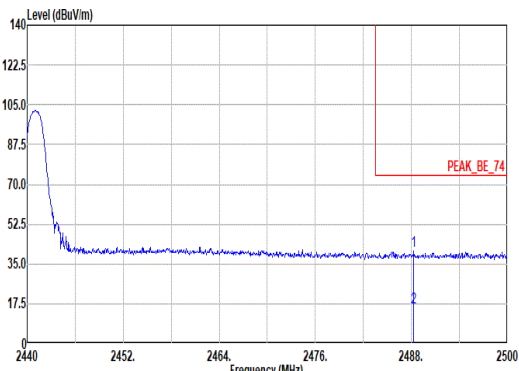


Mode	5																																																																				
	Band Edge - R																																																																				
	2400-2483.5_Bluetooth BR_GFSK_CH39_2441MHz																																																																				
ANT	7																																																																				
Pol.	Horizontal							Fundamental																																																													
Peak	 Site : 03CH22-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C04A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2488.30</td><td>40.77</td><td>74.00</td><td>-33.23</td><td>37.91</td><td>26.70</td><td>8.81</td><td>32.65</td><td>0.00</td><td>100</td><td>257</td><td>PEAK</td></tr><tr><td>2</td><td>2488.30</td><td>16.01</td><td>54.00</td><td>-37.99</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>Average</td></tr></table>								Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2488.30	40.77	74.00	-33.23	37.91	26.70	8.81	32.65	0.00	100	257	PEAK	2	2488.30	16.01	54.00	-37.99	--	--	--	--	--	--	--	--	Average	Blank						
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																								
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																									
1	2488.30	40.77	74.00	-33.23	37.91	26.70	8.81	32.65	0.00	100	257	PEAK																																																									
2	2488.30	16.01	54.00	-37.99	--	--	--	--	--	--	--	--	Average																																																								

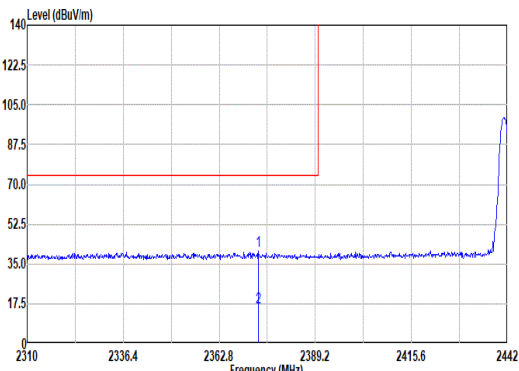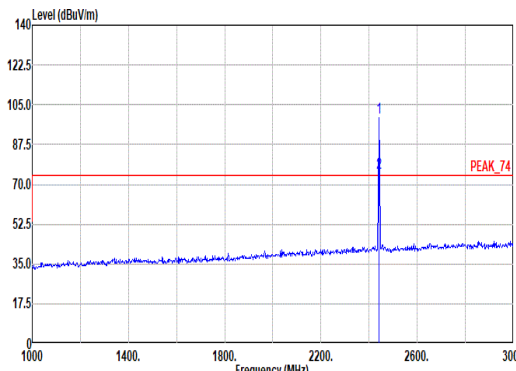

Mode	5																																																																																																																													
	Band Edge - L																																																																																																																													
	2400-2483.5_Bluetooth BR_GFSK_CH39_2441MHz																																																																																																																													
ANT	7																																																																																																																													
Pol.	Vertical						Fundamental																																																																																																																							
Peak	 Site : 03CH22-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C04A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2373.49</td><td>40.77</td><td>74.00</td><td>-33.23</td><td>37.82</td><td>26.93</td><td>8.60</td><td>32.58</td><td>0.00</td><td>375</td><td>285</td><td>PEAK</td></tr><tr><td>2</td><td>2373.49</td><td>16.01</td><td>54.00</td><td>-37.99</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2373.49	40.77	74.00	-33.23	37.82	26.93	8.60	32.58	0.00	375	285	PEAK	2	2373.49	16.01	54.00	-37.99	--	--	--	--	--	--	--	Average	 Site : 03CH22-HY Condition: PEAK_74 3m DRH18-E_LE2C04A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2441.00</td><td>99.57</td><td>-----</td><td>-----</td><td>96.74</td><td>26.72</td><td>8.73</td><td>32.62</td><td>0.00</td><td>375</td><td>285</td><td>PEAK</td></tr><tr><td>2</td><td>2441.00</td><td>74.81</td><td>-----</td><td>-----</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2441.00	99.57	-----	-----	96.74	26.72	8.73	32.62	0.00	375	285	PEAK	2	2441.00	74.81	-----	-----	--	--	--	--	--	--	--	Average
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																				
1	2373.49	40.77	74.00	-33.23	37.82	26.93	8.60	32.58	0.00	375	285	PEAK																																																																																																																		
2	2373.49	16.01	54.00	-37.99	--	--	--	--	--	--	--	Average																																																																																																																		
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																				
1	2441.00	99.57	-----	-----	96.74	26.72	8.73	32.62	0.00	375	285	PEAK																																																																																																																		
2	2441.00	74.81	-----	-----	--	--	--	--	--	--	--	Average																																																																																																																		


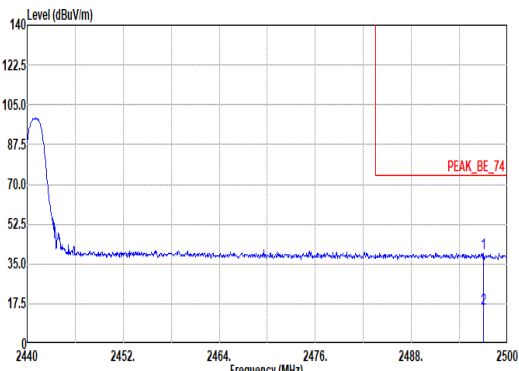


Mode	5																																																									
	Band Edge - R																																																									
	2400-2483.5_Bluetooth BR_GFSK_CH39_2441MHz																																																									
ANT	7																																																									
Pol.	Vertical	Fundamental																																																								
Peak	 Site : 03CH22-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C04A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2497.00</td><td>39.85</td><td>74.00</td><td>-34.15</td><td>36.98</td><td>26.70</td><td>0.83</td><td>32.66</td><td>0.00</td><td></td><td>375</td><td>285</td><td>PEAK</td></tr><tr><td>2</td><td>2497.00</td><td>15.09</td><td>54.00</td><td>-38.91</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>Average</td></tr></table>		Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2497.00	39.85	74.00	-34.15	36.98	26.70	0.83	32.66	0.00		375	285	PEAK	2	2497.00	15.09	54.00	-38.91	--	--	--	--	--	--	--	--	Average	Blank
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																													
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																														
1	2497.00	39.85	74.00	-34.15	36.98	26.70	0.83	32.66	0.00		375	285	PEAK																																													
2	2497.00	15.09	54.00	-38.91	--	--	--	--	--	--	--	--	Average																																													





Mode	5																																																																																																						
	Harmonic																																																																																																						
	2400-2483.5_Bluetooth BR_GFSK_CH39_2441MHz																																																																																																						
ANT	7																																																																																																						
Pol.	Horizontal						Vertical																																																																																																
Peak Avg																																																																																																							
	Site : 03CH22-HY Condition: PEAK_74 3m DRH18-E_LE2C04A18EN_240711 HORIZONTAL						Site : 03CH22-HY Condition: PEAK_74 3m DRH18-E_LE2C04A18EN_240711 VERTICAL																																																																																																
<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4882.00</td><td>45.25</td><td>74.00</td><td>-28.75</td><td>33.27</td><td>32.46</td><td>12.49</td><td>33.67</td><td>0.70</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>4882.00</td><td>20.49</td><td>54.00</td><td>-33.51</td><td>8.51</td><td>32.46</td><td>12.49</td><td>33.67</td><td>0.70</td><td>--</td><td>--</td><td>Average</td></tr><tr><td>3</td><td>7323.00</td><td>49.79</td><td>74.00</td><td>-24.21</td><td>33.15</td><td>37.20</td><td>15.41</td><td>36.61</td><td>0.64</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>4</td><td>7323.00</td><td>25.03</td><td>54.00</td><td>-28.97</td><td>8.39</td><td>37.20</td><td>15.41</td><td>36.61</td><td>0.64</td><td>--</td><td>--</td><td>Average</td></tr></table>																Limit		Read		Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	4882.00	45.25	74.00	-28.75	33.27	32.46	12.49	33.67	0.70	--	--	PEAK	2	4882.00	20.49	54.00	-33.51	8.51	32.46	12.49	33.67	0.70	--	--	Average	3	7323.00	49.79	74.00	-24.21	33.15	37.20	15.41	36.61	0.64	--	--	PEAK	4	7323.00	25.03	54.00	-28.97	8.39	37.20	15.41	36.61	0.64	--	--	Average
		Limit		Read		Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Factor																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																												
1	4882.00	45.25	74.00	-28.75	33.27	32.46	12.49	33.67	0.70	--	--	PEAK																																																																																											
2	4882.00	20.49	54.00	-33.51	8.51	32.46	12.49	33.67	0.70	--	--	Average																																																																																											
3	7323.00	49.79	74.00	-24.21	33.15	37.20	15.41	36.61	0.64	--	--	PEAK																																																																																											
4	7323.00	25.03	54.00	-28.97	8.39	37.20	15.41	36.61	0.64	--	--	Average																																																																																											

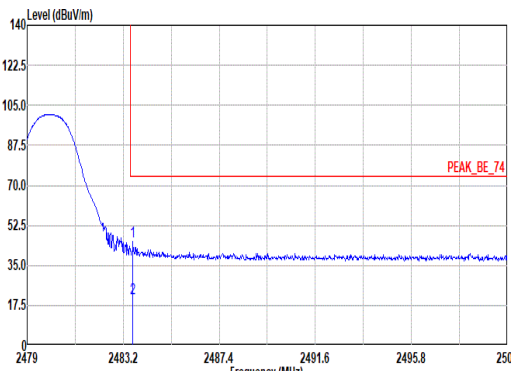
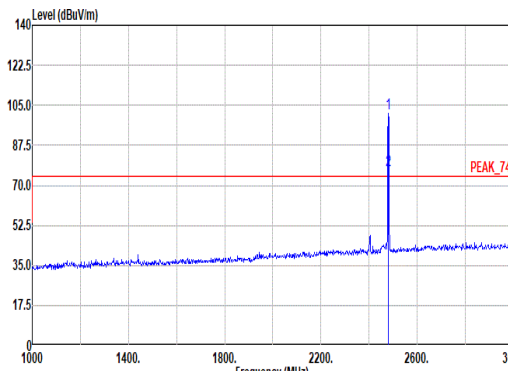


Mode	6																																																																																																																													
	Band Edge																																																																																																																													
	2400-2483.5_Bluetooth BR_GFSK_CH78_2480MHz																																																																																																																													
ANT	7																																																																																																																													
Pol.	Horizontal						Fundamental																																																																																																																							
Peak	 Site : 03CH22-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C04A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.62</td><td>45.55</td><td>74.00</td><td>-28.45</td><td>42.70</td><td>26.70</td><td>8.80</td><td>32.65</td><td>0.00</td><td>131</td><td>259</td><td>PEAK</td></tr><tr><td>2</td><td>2483.62</td><td>20.79</td><td>54.00</td><td>-33.21</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>131</td><td>259</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.62	45.55	74.00	-28.45	42.70	26.70	8.80	32.65	0.00	131	259	PEAK	2	2483.62	20.79	54.00	-33.21	--	--	--	--	--	131	259	AVERAGE	 Site : 03CH22-HY Condition: PEAK_74 3m DRH18-E_LE2C04A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>101.51</td><td>-----</td><td>-----</td><td>98.66</td><td>26.70</td><td>8.80</td><td>32.65</td><td>0.00</td><td>131</td><td>259</td><td>PEAK</td></tr><tr><td>2</td><td>2480.00</td><td>76.75</td><td>-----</td><td>-----</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>131</td><td>259</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	101.51	-----	-----	98.66	26.70	8.80	32.65	0.00	131	259	PEAK	2	2480.00	76.75	-----	-----	--	--	--	--	--	131	259	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																				
1	2483.62	45.55	74.00	-28.45	42.70	26.70	8.80	32.65	0.00	131	259	PEAK																																																																																																																		
2	2483.62	20.79	54.00	-33.21	--	--	--	--	--	131	259	AVERAGE																																																																																																																		
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																				
1	2480.00	101.51	-----	-----	98.66	26.70	8.80	32.65	0.00	131	259	PEAK																																																																																																																		
2	2480.00	76.75	-----	-----	--	--	--	--	--	131	259	AVERAGE																																																																																																																		

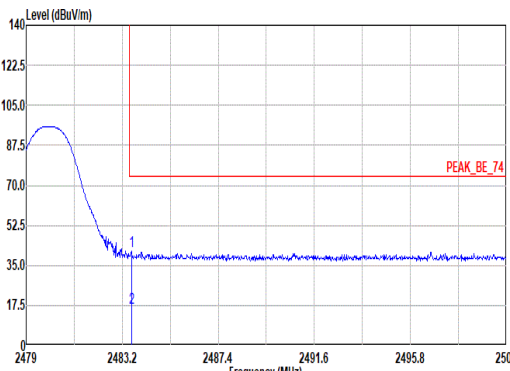
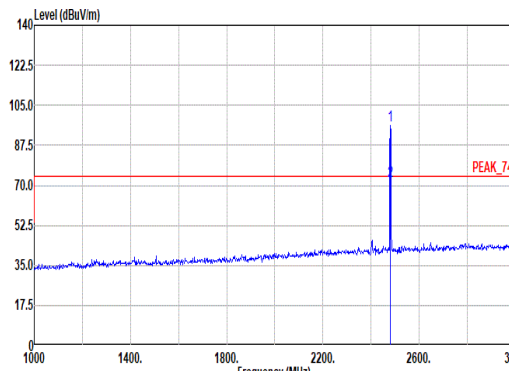


Mode	6																																																																																																																													
	Band Edge																																																																																																																													
	2400-2483.5_Bluetooth BR_GFSK_CH78_2480MHz																																																																																																																													
ANT	7																																																																																																																													
Pol.	Vertical						Fundamental																																																																																																																							
Peak	 Site : 03CH22-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C04A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.60</td><td>41.20</td><td>74.00</td><td>-32.80</td><td>38.35</td><td>26.70</td><td>8.80</td><td>32.65</td><td>0.00</td><td>328</td><td>200</td><td>PEAK</td></tr><tr><td>2</td><td>2483.60</td><td>16.44</td><td>54.00</td><td>-37.56</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>328</td><td>200</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.60	41.20	74.00	-32.80	38.35	26.70	8.80	32.65	0.00	328	200	PEAK	2	2483.60	16.44	54.00	-37.56	--	--	--	--	--	328	200	AVERAGE	 Site : 03CH22-HY Condition: PEAK_74 3m DRH18-E_LE2C04A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>96.37</td><td>-----</td><td>-----</td><td>93.52</td><td>26.70</td><td>8.80</td><td>32.65</td><td>0.00</td><td>328</td><td>200</td><td>PEAK</td></tr><tr><td>2</td><td>2480.00</td><td>71.61</td><td>-----</td><td>-----</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>328</td><td>200</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	96.37	-----	-----	93.52	26.70	8.80	32.65	0.00	328	200	PEAK	2	2480.00	71.61	-----	-----	--	--	--	--	--	328	200	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																				
1	2483.60	41.20	74.00	-32.80	38.35	26.70	8.80	32.65	0.00	328	200	PEAK																																																																																																																		
2	2483.60	16.44	54.00	-37.56	--	--	--	--	--	328	200	AVERAGE																																																																																																																		
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																				
1	2480.00	96.37	-----	-----	93.52	26.70	8.80	32.65	0.00	328	200	PEAK																																																																																																																		
2	2480.00	71.61	-----	-----	--	--	--	--	--	328	200	AVERAGE																																																																																																																		

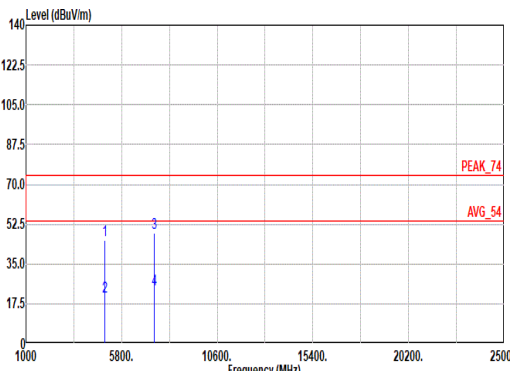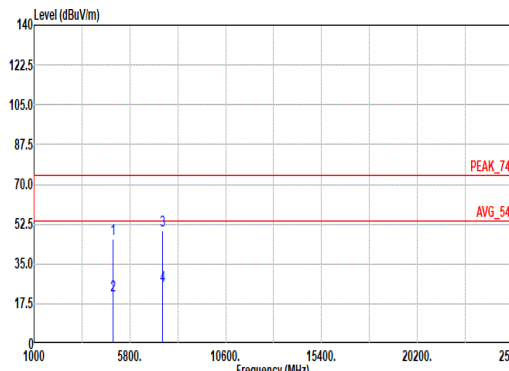


Mode	6												
	Harmonic												
	2400-2483.5_Bluetooth BR_GFSK_CH78_2480MHz												
ANT	7												
Pol.	Horizontal						Vertical						
Peak Avg													
	Site : 03CH22-HY Condition: PEAK_74 3m DRH18-E_LE2C04A18EN_240711 HORIZONTAL						Site : 03CH22-HY Condition: PEAK_74 3m DRH18-E_LE2C04A18EN_240711 VERTICAL						
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB		dBuV	dB/m	dB	dB	dB	cm	deg	
1	4960.00	45.62	74.00	-28.38	33.34	32.70	12.56	33.67	0.69	--	--	--	PEAK
2	4960.00	20.86	54.00	-33.14	8.58	32.70	12.56	33.67	0.69	--	--	--	Average
3	7440.00	48.55	74.00	-25.45	31.90	37.26	15.55	36.79	0.63	--	--	--	PEAK
4	7440.00	23.79	54.00	-30.21	7.14	37.26	15.55	36.79	0.63	--	--	--	Average
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB		dBuV	dB/m	dB	dB	dB	cm	deg	
1	4960.00	45.71	74.00	-28.29	33.43	32.70	12.56	33.67	0.69	--	--	--	PEAK
2	4960.00	20.95	54.00	-33.05	8.67	32.70	12.56	33.67	0.69	--	--	--	Average
3	7440.00	49.92	74.00	-24.08	33.27	37.26	15.55	36.79	0.63	--	--	--	PEAK
4	7440.00	25.16	54.00	-28.84	8.51	37.26	15.55	36.79	0.63	--	--	--	Average

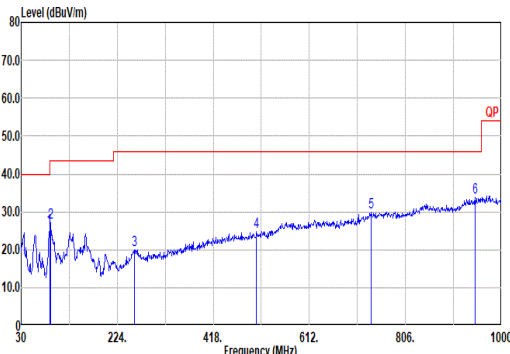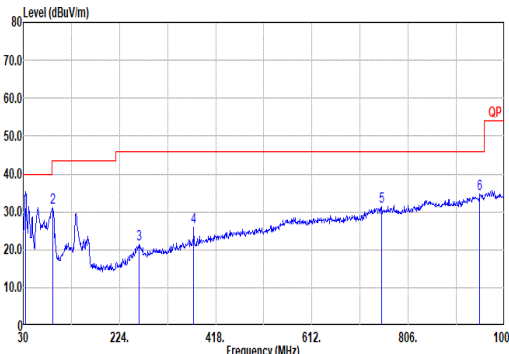

Mode	42																																																																																																																																																																																																																																			
	LF																																																																																																																																																																																																																																			
	2400-2483.5_Bluetooth BR_GFSK_CH78_2480MHz																																																																																																																																																																																																																																			
ANT	7																																																																																																																																																																																																																																			
Pol.	Horizontal																																																																																																																																																																																																																																			
QP/ Peak	 Site : 03CH22-HY Condition: QP 3m Bilog_47020_241005 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>87.23</td><td>25.73</td><td>40.00</td><td>-14.27</td><td>42.14</td><td>14.52</td><td>1.67</td><td>32.69</td><td>0.09</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>89.17</td><td>27.22</td><td>43.50</td><td>-16.28</td><td>43.27</td><td>14.86</td><td>1.69</td><td>32.69</td><td>0.09</td><td>--</td><td>Peak</td></tr><tr><td>3</td><td>258.92</td><td>19.97</td><td>46.00</td><td>-26.03</td><td>29.65</td><td>20.03</td><td>2.86</td><td>32.62</td><td>0.05</td><td>--</td><td>Peak</td></tr><tr><td>4</td><td>505.30</td><td>24.62</td><td>46.00</td><td>-21.38</td><td>29.39</td><td>23.85</td><td>3.96</td><td>32.80</td><td>0.22</td><td>--</td><td>Peak</td></tr><tr><td>5</td><td>736.16</td><td>29.94</td><td>46.00</td><td>-16.06</td><td>29.56</td><td>28.16</td><td>4.79</td><td>32.69</td><td>0.12</td><td>--</td><td>Peak</td></tr><tr><td>6</td><td>946.65</td><td>33.68</td><td>46.00</td><td>-12.32</td><td>28.56</td><td>30.90</td><td>5.40</td><td>31.37</td><td>0.19</td><td>--</td><td>Peak</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	87.23	25.73	40.00	-14.27	42.14	14.52	1.67	32.69	0.09	--	Peak	2	89.17	27.22	43.50	-16.28	43.27	14.86	1.69	32.69	0.09	--	Peak	3	258.92	19.97	46.00	-26.03	29.65	20.03	2.86	32.62	0.05	--	Peak	4	505.30	24.62	46.00	-21.38	29.39	23.85	3.96	32.80	0.22	--	Peak	5	736.16	29.94	46.00	-16.06	29.56	28.16	4.79	32.69	0.12	--	Peak	6	946.65	33.68	46.00	-12.32	28.56	30.90	5.40	31.37	0.19	--	Peak	 Site : 03CH22-HY Condition: QP 3m Bilog_47020_241005 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>34.85</td><td>31.11</td><td>40.00</td><td>-8.89</td><td>40.33</td><td>22.35</td><td>1.06</td><td>32.66</td><td>0.03</td><td>100</td><td>217 QP</td></tr><tr><td>2</td><td>89.17</td><td>31.05</td><td>43.50</td><td>-12.45</td><td>47.10</td><td>14.86</td><td>1.69</td><td>32.69</td><td>0.09</td><td>--</td><td>Peak</td></tr><tr><td>3</td><td>263.77</td><td>21.55</td><td>46.00</td><td>-24.45</td><td>31.24</td><td>20.01</td><td>2.88</td><td>32.62</td><td>0.04</td><td>--</td><td>Peak</td></tr><tr><td>4</td><td>373.38</td><td>26.05</td><td>46.00</td><td>-19.95</td><td>34.20</td><td>21.07</td><td>3.43</td><td>32.72</td><td>0.07</td><td>--</td><td>Peak</td></tr><tr><td>5</td><td>752.65</td><td>31.26</td><td>46.00</td><td>-14.74</td><td>30.53</td><td>28.37</td><td>4.84</td><td>32.61</td><td>0.13</td><td>--</td><td>Peak</td></tr><tr><td>6</td><td>950.53</td><td>34.61</td><td>46.00</td><td>-11.39</td><td>29.34</td><td>30.99</td><td>5.41</td><td>31.33</td><td>0.20</td><td>--</td><td>Peak</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	34.85	31.11	40.00	-8.89	40.33	22.35	1.06	32.66	0.03	100	217 QP	2	89.17	31.05	43.50	-12.45	47.10	14.86	1.69	32.69	0.09	--	Peak	3	263.77	21.55	46.00	-24.45	31.24	20.01	2.88	32.62	0.04	--	Peak	4	373.38	26.05	46.00	-19.95	34.20	21.07	3.43	32.72	0.07	--	Peak	5	752.65	31.26	46.00	-14.74	30.53	28.37	4.84	32.61	0.13	--	Peak	6	950.53	34.61	46.00	-11.39	29.34	30.99	5.41	31.33	0.20	--	Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																																										
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																																																										
1	87.23	25.73	40.00	-14.27	42.14	14.52	1.67	32.69	0.09	--	Peak																																																																																																																																																																																																																									
2	89.17	27.22	43.50	-16.28	43.27	14.86	1.69	32.69	0.09	--	Peak																																																																																																																																																																																																																									
3	258.92	19.97	46.00	-26.03	29.65	20.03	2.86	32.62	0.05	--	Peak																																																																																																																																																																																																																									
4	505.30	24.62	46.00	-21.38	29.39	23.85	3.96	32.80	0.22	--	Peak																																																																																																																																																																																																																									
5	736.16	29.94	46.00	-16.06	29.56	28.16	4.79	32.69	0.12	--	Peak																																																																																																																																																																																																																									
6	946.65	33.68	46.00	-12.32	28.56	30.90	5.40	31.37	0.19	--	Peak																																																																																																																																																																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																																																										
1	34.85	31.11	40.00	-8.89	40.33	22.35	1.06	32.66	0.03	100	217 QP																																																																																																																																																																																																																									
2	89.17	31.05	43.50	-12.45	47.10	14.86	1.69	32.69	0.09	--	Peak																																																																																																																																																																																																																									
3	263.77	21.55	46.00	-24.45	31.24	20.01	2.88	32.62	0.04	--	Peak																																																																																																																																																																																																																									
4	373.38	26.05	46.00	-19.95	34.20	21.07	3.43	32.72	0.07	--	Peak																																																																																																																																																																																																																									
5	752.65	31.26	46.00	-14.74	30.53	28.37	4.84	32.61	0.13	--	Peak																																																																																																																																																																																																																									
6	950.53	34.61	46.00	-11.39	29.34	30.99	5.41	31.33	0.20	--	Peak																																																																																																																																																																																																																									

Appendix D. Duty Cycle Plots

<Ant.6>

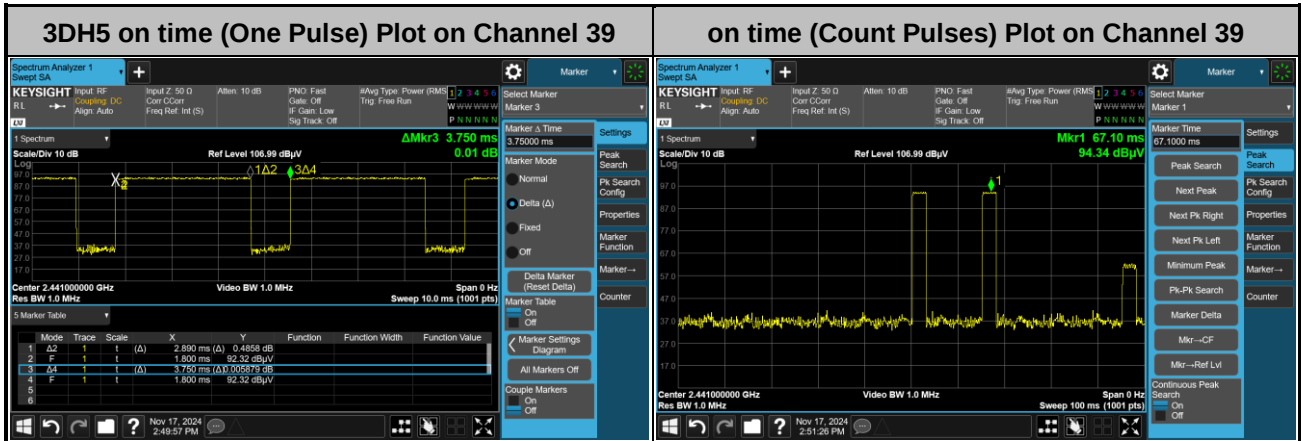

Note:

1. Worst case Duty cycle = on time/100 milliseconds = $2 \times 2.89 / 100 = 5.78 \%$
2. Worst case Duty cycle correction factor = $20 \times \log(\text{Duty cycle}) = -24.76 \text{ dB}$
3. 3DH5 has the highest duty cycle worst case and is reported.

Duty Cycle Correction Factor Consideration for AFH mode:

Bluetooth normal hopping rate is 1600Hz and reduced to 800Hz in AFH mode; due to the reduced number of hopping frequencies, with the same packet configuration the dwell time in each channel frequency within 100msec period is longer in AFH mode than normal mode.

In AFH mode, the minimum hopping frequencies are 20, to get the longest dwell time DH5 packet is observed; the on time period to have DH5 packet completing one hopping sequence is

$$2.89 \text{ ms} \times 20 \text{ channels} = 57.8 \text{ ms}$$

There cannot be 2 complete hopping sequences within 100ms period, considering the random hopping behavior, maximum 2 hops can be possibly observed within the period. $[100 \text{ ms} / 57.8 \text{ ms}] = 2 \text{ hops}$

Thus, the maximum possible ON time:


$$2.89 \text{ ms} \times 2 = 5.78 \text{ ms}$$

Worst case Duty Cycle Correction factor, which is derived from the maximum possible ON time,

$$20 \times \log(5.78 \text{ ms}/100 \text{ ms}) = -24.76 \text{ dB}$$



<Ant.7>

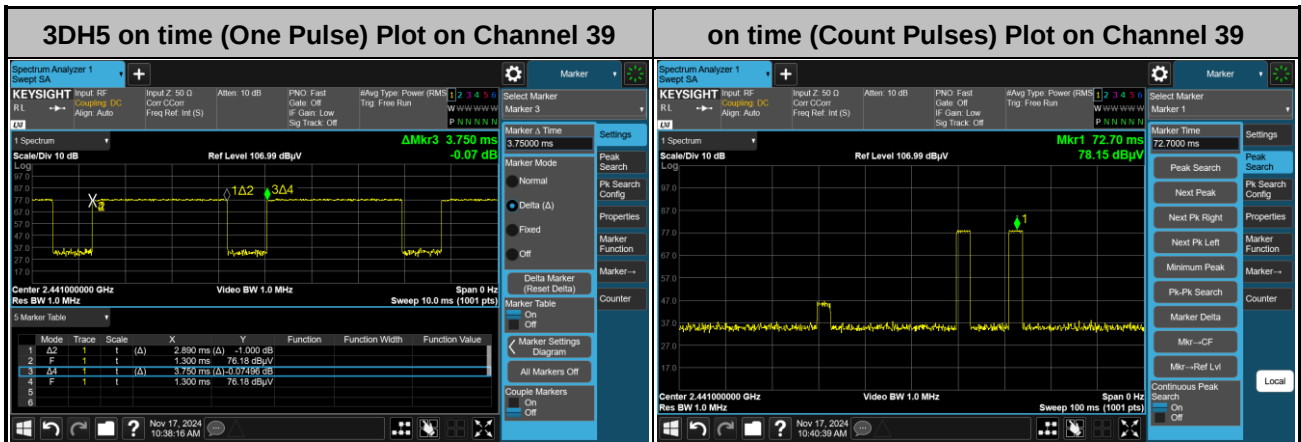

Note:

1. Worst case Duty cycle = on time/100 milliseconds = $2 \times 2.89 / 100 = 5.78 \%$
2. Worst case Duty cycle correction factor = $20 \times \log(\text{Duty cycle}) = -24.76 \text{ dB}$
3. 3DH5 has the highest duty cycle worst case and is reported.

Duty Cycle Correction Factor Consideration for AFH mode:

Bluetooth normal hopping rate is 1600Hz and reduced to 800Hz in AFH mode; due to the reduced number of hopping frequencies, with the same packet configuration the dwell time in each channel frequency within 100msec period is longer in AFH mode than normal mode.

In AFH mode, the minimum hopping frequencies are 20, to get the longest dwell time DH5 packet is observed; the on time period to have DH5 packet completing one hopping sequence is

$$2.89 \text{ ms} \times 20 \text{ channels} = 57.8 \text{ ms}$$

There cannot be 2 complete hopping sequences within 100ms period, considering the random hopping behavior, maximum 2 hops can be possibly observed within the period. $[100 \text{ ms} / 57.8 \text{ ms}] = 2 \text{ hops}$

Thus, the maximum possible ON time:

$$2.89 \text{ ms} \times 2 = 5.78 \text{ ms}$$

Worst case Duty Cycle Correction factor, which is derived from the maximum possible ON time,

$$20 \times \log(5.78 \text{ ms}/100 \text{ ms}) = -24.76 \text{ dB}$$

Appendix F. Spot Check Evaluation on MC345B

Conducted power test and radiated spurious emission test configurations were selected from the worst cases identified in the reference model and tested to demonstrate the test data from reference model remains representative for the variant model.

The deviation between the spot check and the referenced values is within 3dB, therefore data referencing is justified according to the guidance in the ECR inquiry

Mode	Test Item	UZ7MC345A Reference Worst mode Test Result	UZ7MC345B Variant Check Test Result	Deviation	Limit (dB)
BT	Number of Channels	79	79	-	compliant rule parts
	Hopping Channel Separation	0.990MHz	0.994MHz	-	compliant rule parts
	Dwell Time of Each Channel	0.383ms	0.386ms		compliant rule parts
	20dB Bandwidth	1.220MHz	1.220MHz	-	Within the authorized frequency block
	99% Bandwidth	1.154MHz	1.154MHz	-	Within the authorized frequency block
	Conducted Band Edges	-43.45dBm	-43.60dBm	0.15	Deviation (ddB) < 3 dB
	Conducted Spurious Emission	-37.39dBm	-37.49dBm	0.10	Deviation (ddB) < 3 dB
	Peak Output Power	6.86 dBm	6.80 dBm	0.06	Deviation (ddB) < 3 dB
	Radiated Band Edges and Radiated Spurious Emission	49.92 dBuV/m	48.88 dBuV/m	1.04	Deviation (ddB) < 3 dB
	AC Conducted Emission	Under limit14.10db	Under limit14.84db	N/A	compliant rule parts



List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Hygrometer	TECPEL	DTM-303A	TP201996	N/A	Nov. 01, 2024	Jan. 21, 2025	Oct. 31, 2025	Conducted (TH05-HY)
Power Meter	Anritsu	ML2495A	1036004	N/A	Jul. 04, 2024	Jan. 21, 2025	Jul. 03, 2025	Conducted (TH05-HY)
Power Sensor	Anritsu	MA2411B	1027253	300MHz~40GHz	Jul. 04, 2024	Jan. 21, 2025	Jul. 03, 2025	Conducted (TH05-HY)
Signal Analyzer	Rohde & Schwarz	FSV40	101566	10Hz~40GHz	Aug. 23, 2024	Jan. 21, 2025	Aug. 22, 2025	Conducted (TH05-HY)
Switch Control Mainframe	Burgeon	ETF-058	EC1300484 (BOX3)	N/A	May 20, 2024	Jan. 21, 2025	May 19, 2025	Conducted (TH05-HY)
Software	Sporton	BTWiFi_Final_version_240513	N/A	Conducted Other Test Item	N/A	Jan. 21, 2025	N/A	Conducted (TH05-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100488	9kHz~30MHz	Aug. 29, 2024	Dec. 16, 2024~Dec. 27, 2024	Aug. 28, 2025	Radiation (03CH22-HY)
Bilog Antenna	TESEQ	CBL 6111D & 00802N1D01N-06	47020 & 06	30MHz~1GHz	Oct. 05, 2024	Dec. 16, 2024~Dec. 27, 2024	Oct. 04, 2025	Radiation (03CH22-HY)
Amplifier	SONOMA	310N	421581	N/A	Jul. 11, 2024	Dec. 16, 2024~Dec. 27, 2024	Jul. 10, 2025	Radiation (03CH22-HY)
Double Ridged Guide Horn Antenna	RFSPIN	DRH18-E	LE2C04A18EN	1GHz~18GHz	Jul. 11, 2024	Dec. 16, 2024~Dec. 27, 2024	Jul. 10, 2025	Radiation (03CH22-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	1224	18GHz~40GHz	Jun. 24, 2024	Dec. 16, 2024~Dec. 27, 2024	Jun. 23, 2025	Radiation (03CH22-HY)
Amplifier	EMEC	EM01G18GA	060877	N/A	Sep. 27, 2024	Dec. 16, 2024~Dec. 27, 2024	Sep. 26, 2025	Radiation (03CH22-HY)
Preamplifier	EMEC	EM18G40G	060873	18~40GHz	Sep. 02, 2024	Dec. 16, 2024~Dec. 27, 2024	Sep. 01, 2025	Radiation (03CH22-HY)
Signal Analyzer	Keysight	N9010B	MY62170278	10Hz~44GHz	Sep. 24, 2024	Dec. 16, 2024~Dec. 27, 2024	Sep. 23, 2025	Radiation (03CH22-HY)
EMI Test Receiver	Keysight	N9038B	MY62210111	20Hz~8.4GHz	Sep. 03, 2024	Dec. 16, 2024~Dec. 27, 2024	Sep. 02, 2025	Radiation (03CH22-HY)
Hygrometer	TECPEL	DTM-303A	TP211469	N/A	Jan. 03, 2024	Dec. 16, 2024~Dec. 27, 2024	Jan. 02, 2025	Radiation (03CH22-HY)
Controller	EMEC	EM1000	N/A	Control Turn table & Ant Mast	N/A	Dec. 16, 2024~Dec. 27, 2024	N/A	Radiation (03CH22-HY)
Antenna Mast	ChainTek	MBS-520-1	N/A	1m~4m	N/A	Dec. 16, 2024~Dec. 27, 2024	N/A	Radiation (03CH22-HY)
Turn Table	ChainTek	T-200-S-1	N/A	0~360 Degree	N/A	Dec. 16, 2024~Dec. 27, 2024	N/A	Radiation (03CH22-HY)
Software	Audix	E3 6.09824_2019122	RK-002347	N/A	N/A	Dec. 16, 2024~Dec. 27, 2024	N/A	Radiation (03CH22-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	803951/2	9kHz~30MHz	Mar. 06, 2024	Dec. 16, 2024~Dec. 27, 2024	Mar. 05, 2025	Radiation (03CH22-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	804390/2,804611/2,804615/2	N/A	Oct. 23, 2024	Dec. 16, 2024~Dec. 27, 2024	Oct. 22, 2025	Radiation (03CH22-HY)



Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
AC Power Source	ACPOWER	AFC-11003G	F317040033	N/A	N/A	Dec. 04, 2024	N/A	Conduction (CO07-HY)
Software	Rohde & Schwarz	EMC32 V10.30	N/A	N/A	N/A	Dec. 04, 2024	N/A	Conduction (CO07-HY)
Pulse Limiter	SCHWARZBECK	VTSD 9561-FN	9561-FN00373	9kHz-200MHz	Oct. 23, 2024	Dec. 04, 2024	Oct. 22, 2025	Conduction (CO07-HY)
RF Cable	HUBER + SUHNER	RG 214/U	1358175	9kHz~30MHz	Mar. 14, 2024	Dec. 04, 2024	Mar. 13, 2025	Conduction (CO07-HY)
Two-Line V-Network	TESEQ	NNB 51	45051	N/A	Mar. 10, 2024	Dec. 04, 2024	Mar. 09, 2025	Conduction (CO07-HY)
Four-Line V-Network	TESEQ	NNB 52	36122	N/A	Mar. 07, 2024	Dec. 04, 2024	Mar. 06, 2025	Conduction (CO07-HY)
EMI Test Receiver	Rohde & Schwarz	ESC17	100724	9kHz~7GHz	Feb. 20, 2024	Dec. 04, 2024	Feb. 19, 2025	Conduction (CO07-HY)

————THE END————