


802.11ac VHT20 mode/5200MHz


Detector mode: Peak

Polarity: Horizontal

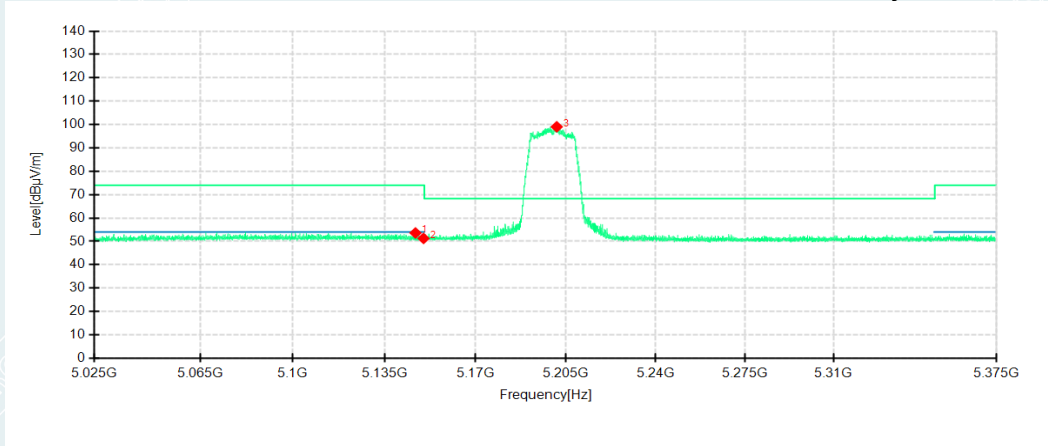

Detector mode: Peak

Polarity: Vertical

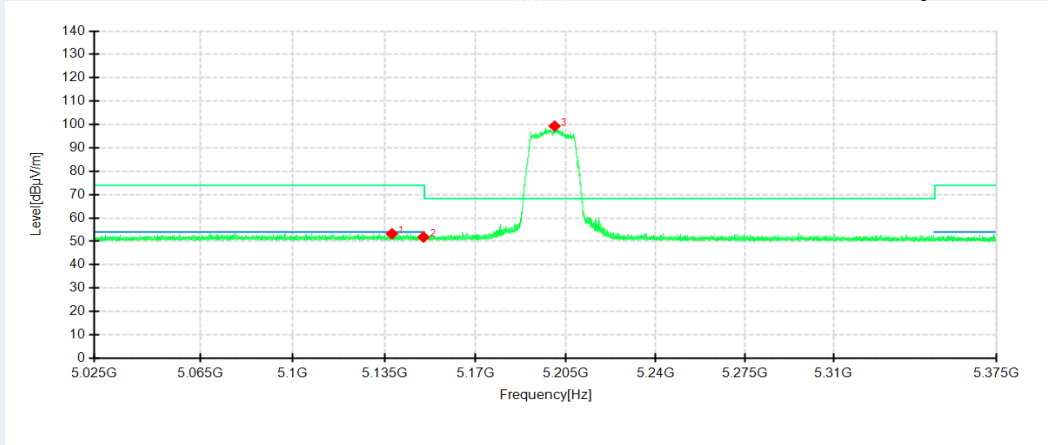


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBuV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5146.9050	39.41	53.60	14.19	74.00	20.40	200	218	Horizontal	/
2	5150.0000	37.08	51.26	14.18	74.00	22.74	200	96	Horizontal	/
3	5201.4350	85.11	99.03	13.92	68.30	-30.73	100	280	Horizontal	No limit
1	5137.8750	39.15	53.24	14.09	74.00	20.76	100	360	Vertical	/
2	5150.0000	37.75	51.83	14.08	74.00	22.17	100	348	Vertical	/
3	5200.6300	85.31	99.33	14.02	68.30	-31.03	200	133	Vertical	No limit

----- The following blanks -----

802.11ac VHT20 mode/5200MHz


Detector mode: Average

Polarity: Horizontal

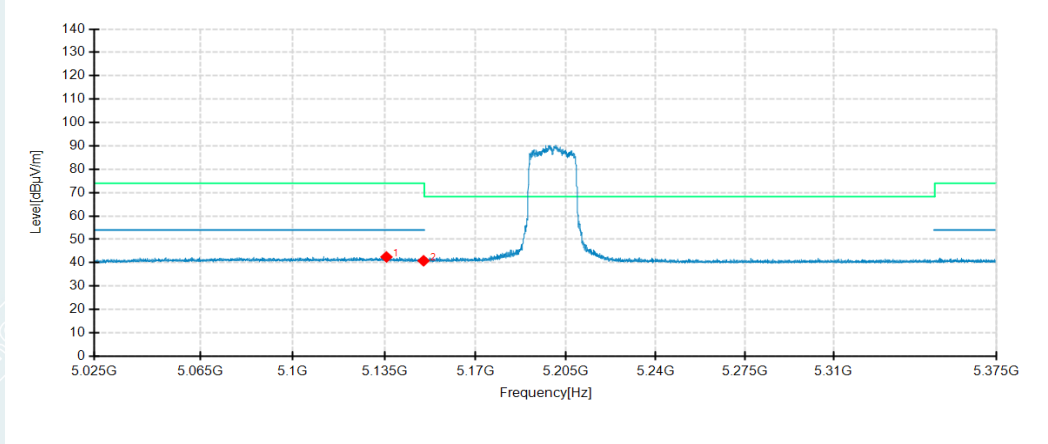

Detector mode: Average

Polarity: Vertical

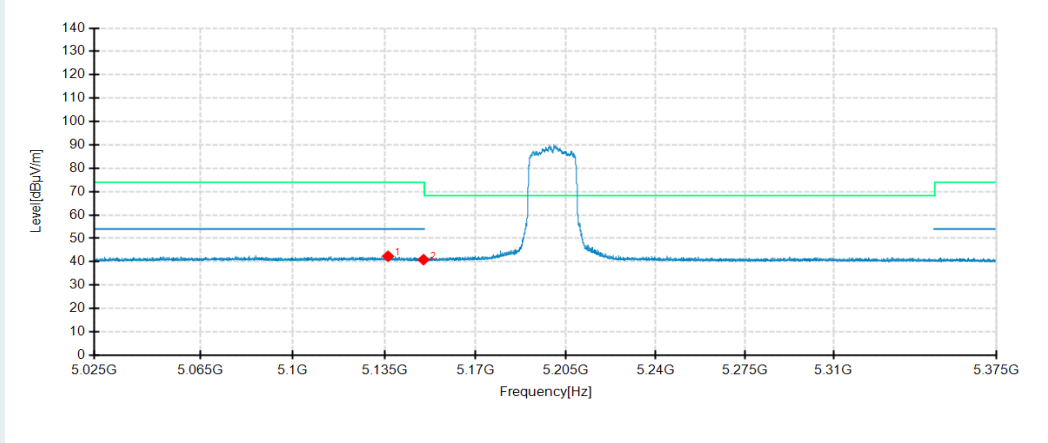


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBuV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5135.7750	28.25	42.47	14.22	54.00	11.53	200	80	Horizontal	/
2	5150.0000	26.66	40.84	14.18	54.00	13.16	100	280	Horizontal	/
1	5136.3700	28.27	42.36	14.09	54.00	11.64	200	2	Vertical	/
2	5150.0000	26.81	40.89	14.08	54.00	13.11	100	246	Vertical	/

----- The following blanks -----

802.11ac VHT20 mode/5240MHz


Detector mode: Peak

Polarity: Horizontal

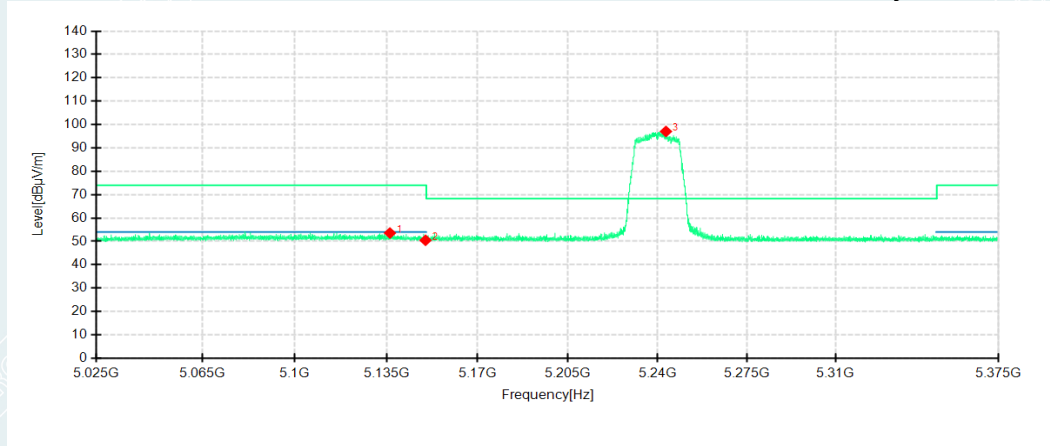

Detector mode: Peak

Polarity: Vertical

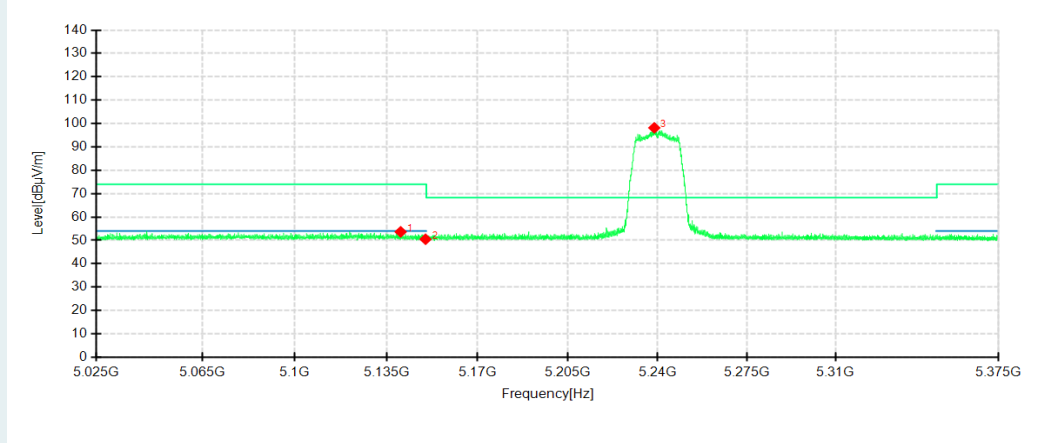


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5136.3350	39.35	53.57	14.22	74.00	20.43	200	80	Horizontal	/
2	5150.0000	36.28	50.46	14.18	74.00	23.54	200	330	Horizontal	/
3	5243.2600	83.24	97.04	13.80	68.30	-28.74	200	90	Horizontal	No limit
1	5140.4650	39.56	53.65	14.09	74.00	20.35	100	97	Vertical	/
2	5150.0000	36.40	50.48	14.08	74.00	23.52	100	164	Vertical	/
3	5238.6750	84.08	98.15	14.07	68.30	-29.85	200	182	Vertical	No limit

----- The following blanks -----

802.11ac VHT20 mode/5240MHz


Detector mode: Average

Polarity: Horizontal

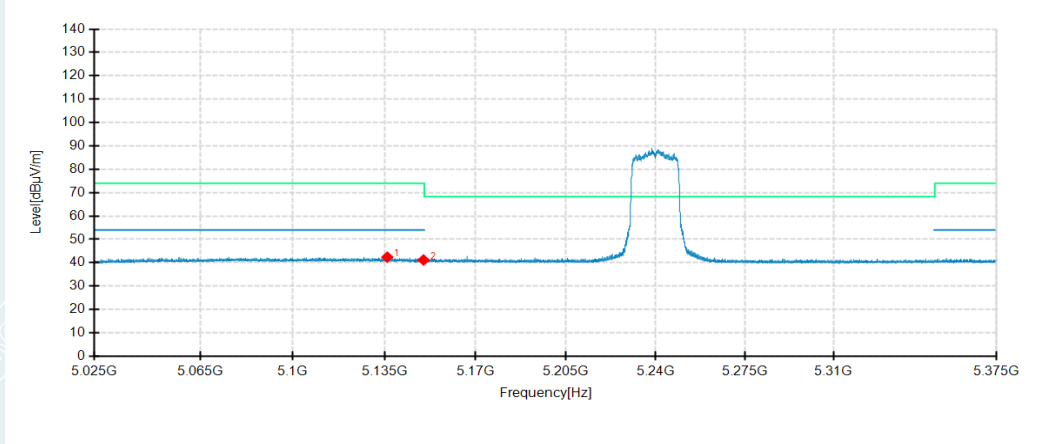

Detector mode: Average

Polarity: Vertical

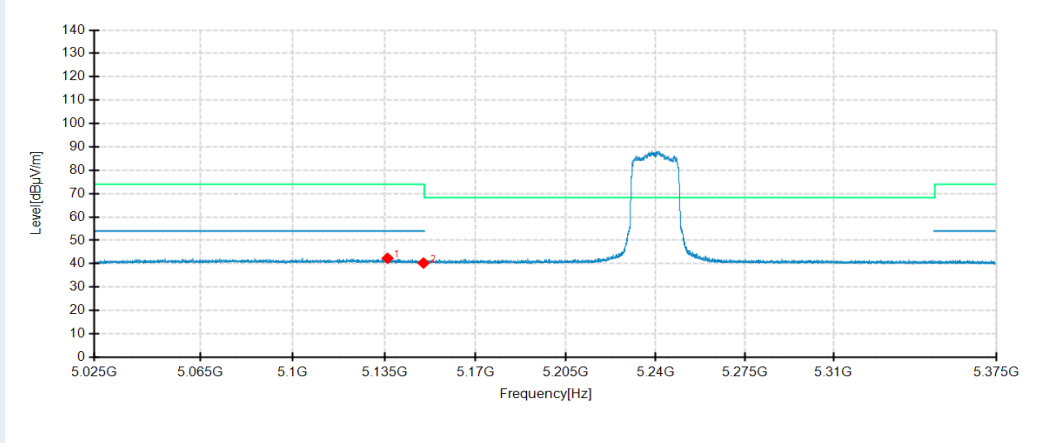


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBuV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5136.0900	28.18	42.40	14.22	54.00	11.60	100	269	Horizontal	/
2	5150.0000	27.00	41.18	14.18	54.00	12.82	200	80	Horizontal	/
1	5136.1950	28.24	42.33	14.09	54.00	11.67	100	80	Vertical	/
2	5150.0000	26.22	40.30	14.08	54.00	13.70	200	240	Vertical	/

----- The following blanks -----

802.11ac VHT40 mode/5190MHz


Detector mode: Peak

Polarity: Horizontal

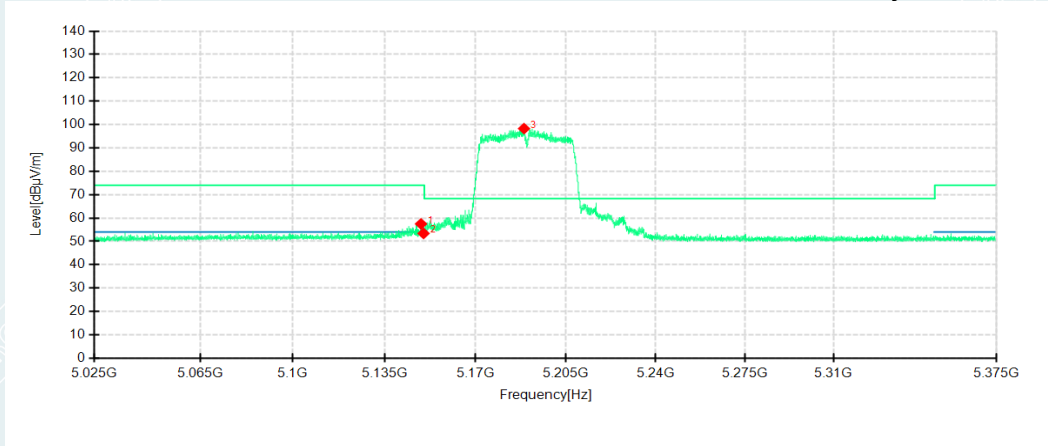

Detector mode: Peak

Polarity: Vertical

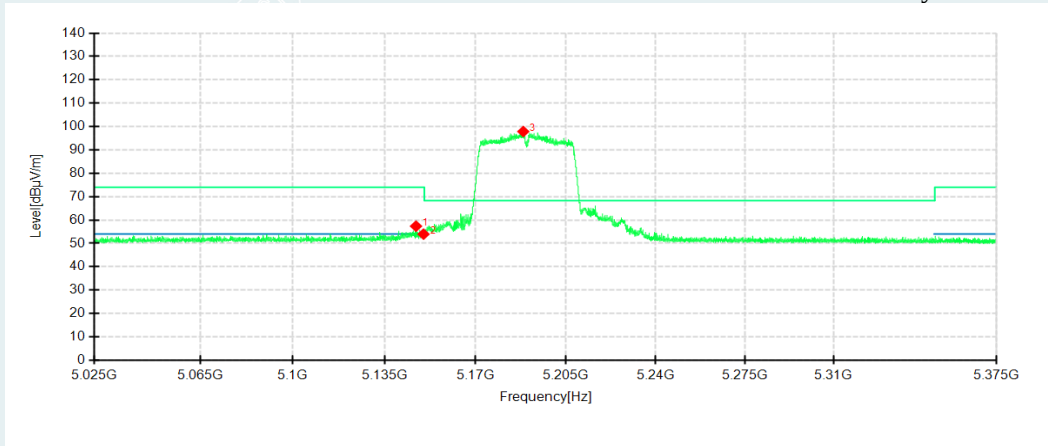


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBuV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5149.0400	43.30	57.48	14.18	74.00	16.52	100	280	Horizontal	/
2	5150.0000	39.21	53.39	14.18	74.00	20.61	100	280	Horizontal	/
3	5188.7650	84.28	98.26	13.98	68.30	-29.96	200	96	Horizontal	No limit
1	5147.1150	43.27	57.35	14.08	74.00	16.65	100	178	Vertical	/
2	5150.0000	39.86	53.94	14.08	74.00	20.06	100	178	Vertical	/
3	5188.4850	83.82	97.85	14.03	68.30	-29.55	200	122	Vertical	No limit

----- The following blanks -----

802.11ac VHT40 mode/5190MHz


Detector mode: Average

Polarity: Horizontal

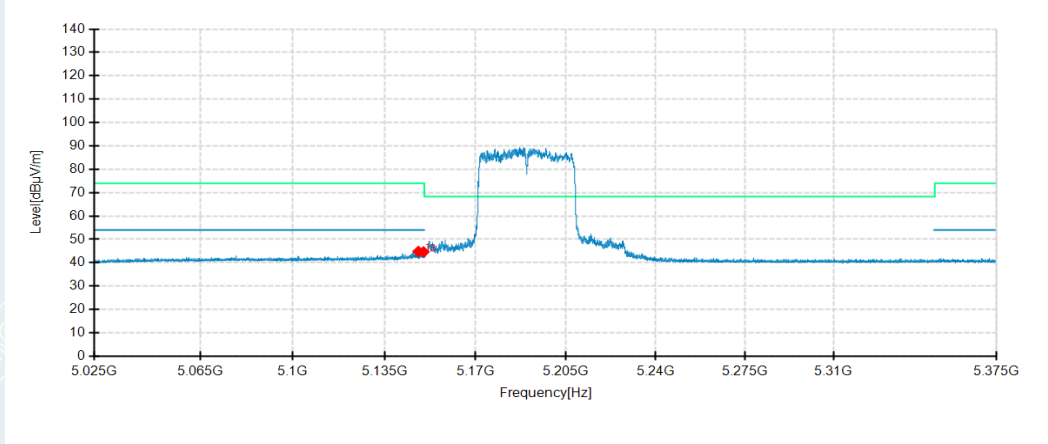

Detector mode: Average

Polarity: Vertical

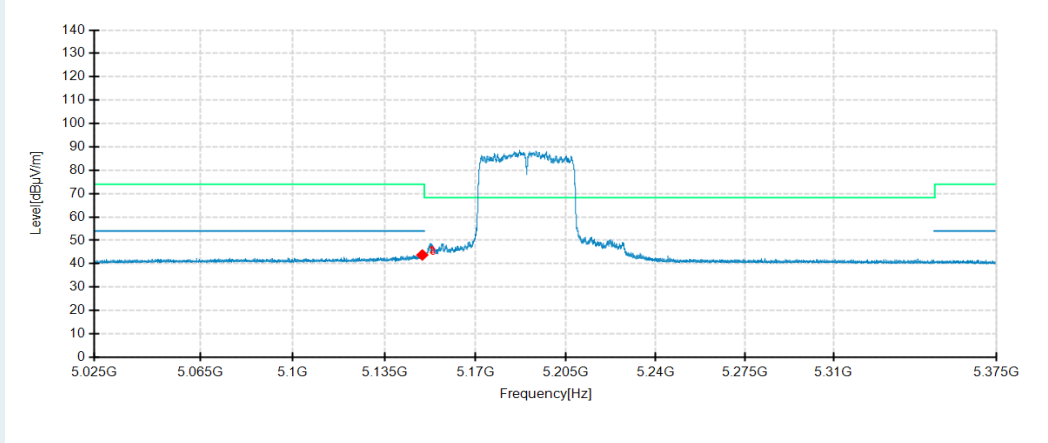


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBuV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5148.0250	30.62	44.81	14.19	54.00	9.19	100	280	Horizontal	/
2	5150.0000	30.45	44.63	14.18	54.00	9.37	100	280	Horizontal	/
1	5149.5300	29.65	43.73	14.08	54.00	10.27	100	335	Vertical	/
2	5149.9500	30.13	44.21	14.08	54.00	9.79	100	339	Vertical	/
3	5150.0000	29.28	43.36	14.08	54.00	10.64	100	346	Vertical	

----- The following blanks -----

802.11ac VHT40 mode/5230MHz


Detector mode: Peak

Polarity: Horizontal

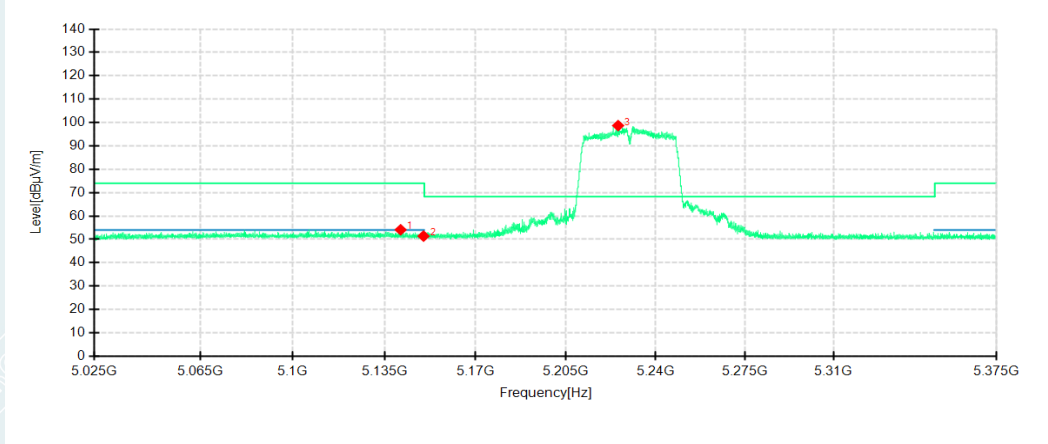

Detector mode: Peak

Polarity: Vertical

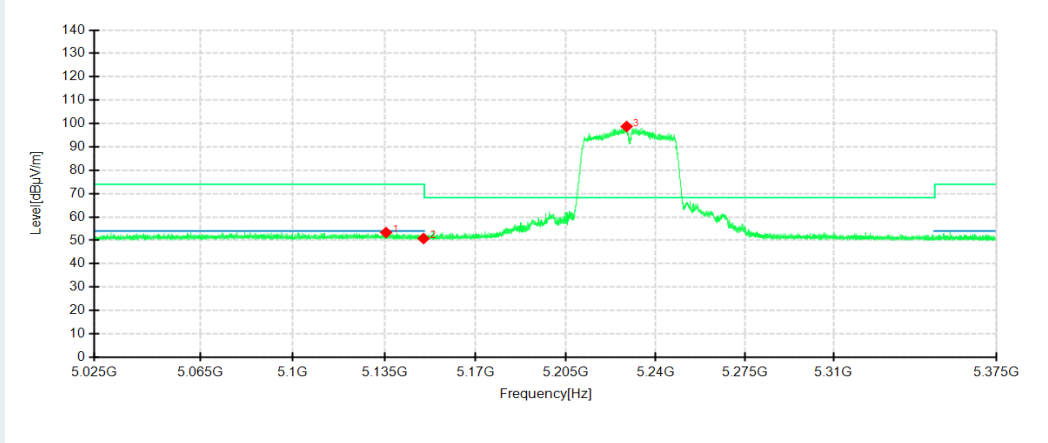


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBuV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5135.6350	39.25	53.34	14.09	74.00	20.66	100	235	Horizontal	/
2	5150.0000	36.70	50.78	14.08	74.00	23.22	100	270	Horizontal	/
3	5228.6650	84.67	98.72	14.05	68.30	-30.42	100	188	Horizontal	No limit
1	5135.6350	39.25	53.34	14.09	74.00	20.66	100	235	Vertical	/
2	5150.0000	36.70	50.78	14.08	74.00	23.22	100	270	Vertical	/
3	5228.6650	84.67	98.72	14.05	68.30	-30.42	100	188	Vertical	No limit

802.11ac VHT40 mode/5230MHz


Detector mode: Average

Polarity: Horizontal

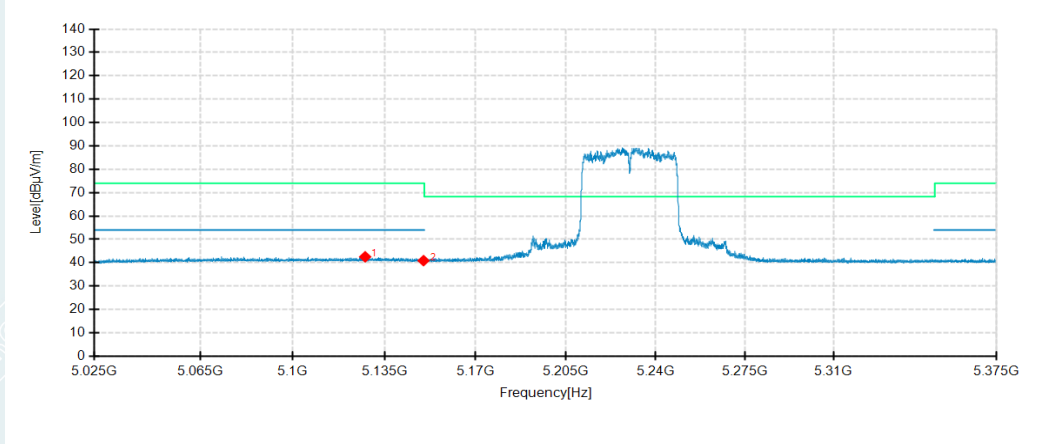

Detector mode: Average

Polarity: Vertical

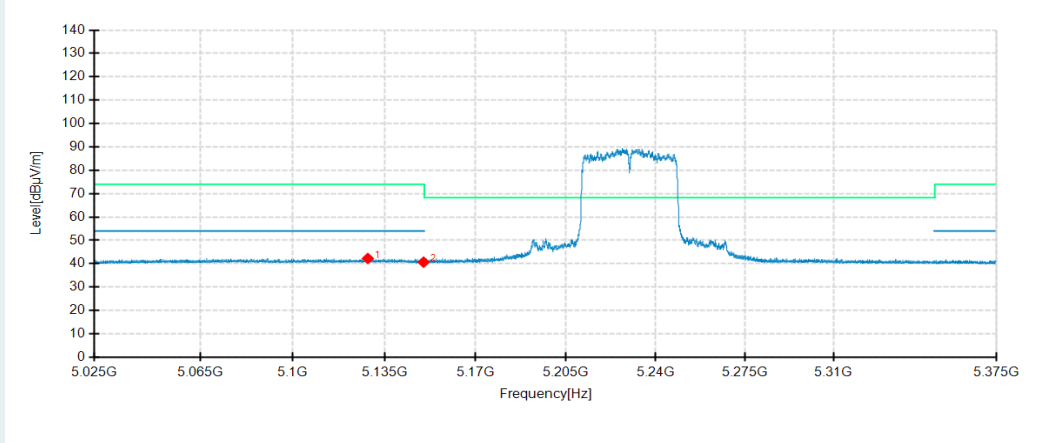


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5127.6200	28.29	42.53	14.24	54.00	11.47	200	153	Horizontal	/
2	5150.0000	26.72	40.90	14.18	54.00	13.10	200	139	Horizontal	/
1	5128.6350	28.17	42.27	14.10	54.00	11.73	100	184	Vertical	/
2	5150.0000	26.59	40.67	14.08	54.00	13.33	200	280	Vertical	/

802.11ac VHT80 mode/5210MHz


Detector mode: Peak

Polarity: Horizontal

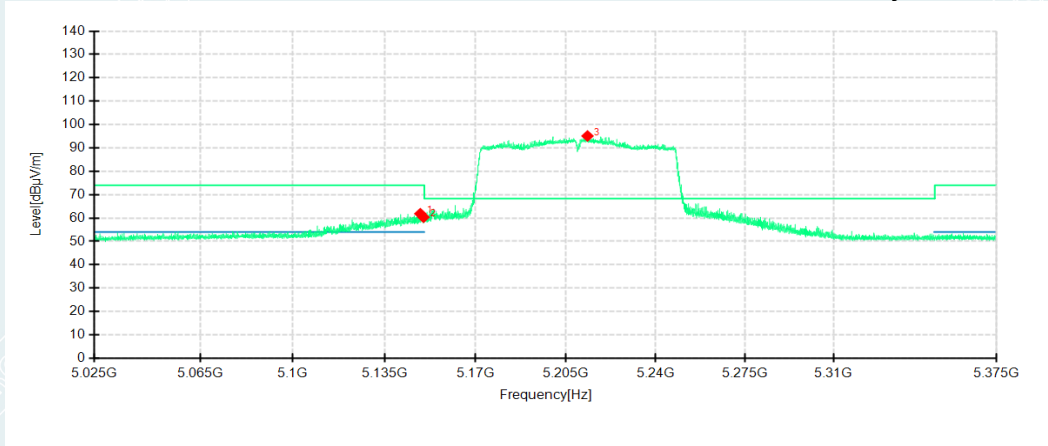

Detector mode: Peak

Polarity: Vertical

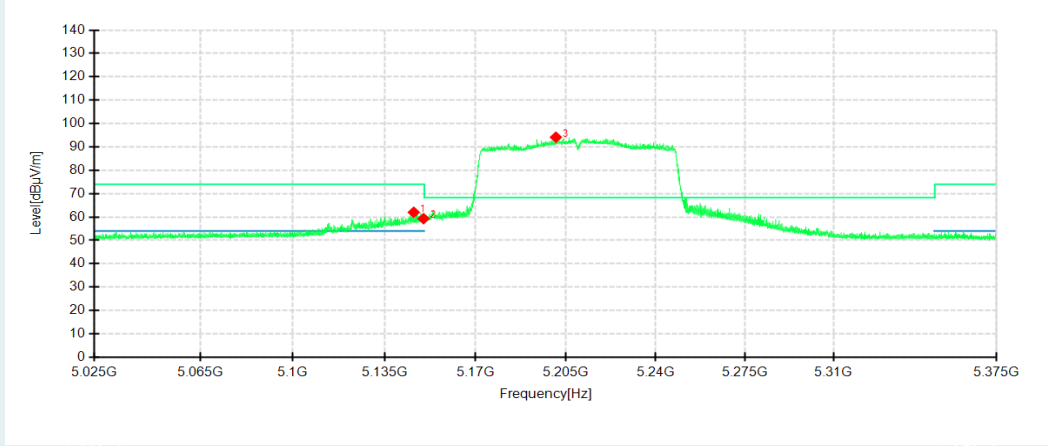


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBuV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5148.7600	47.65	61.83	14.18	74.00	12.17	100	280	Horizontal	/
2	5150.0000	46.16	60.34	14.18	74.00	13.66	100	280	Horizontal	/
3	5213.4050	81.22	95.10	13.88	68.30	-26.80	100	280	Horizontal	No limit
1	5146.2400	47.93	62.01	14.08	74.00	11.99	100	184	Vertical	/
2	5150.0000	45.21	59.29	14.08	74.00	14.71	100	200	Vertical	/
3	5201.1200	80.10	94.12	14.02	68.30	-25.82	200	126	Vertical	No limit

----- The following blanks -----

802.11ac VHT80 mode/5210MHz


Detector mode: Average

Polarity: Horizontal

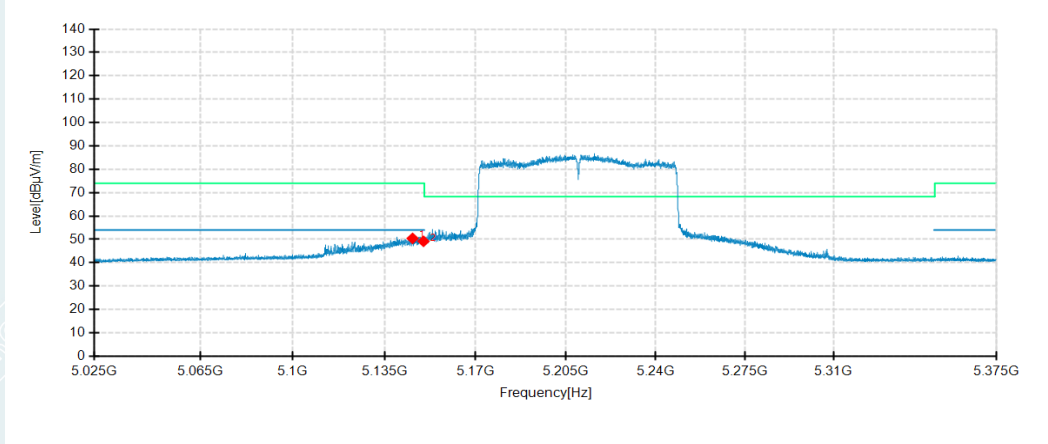

Detector mode: Average

Polarity: Vertical

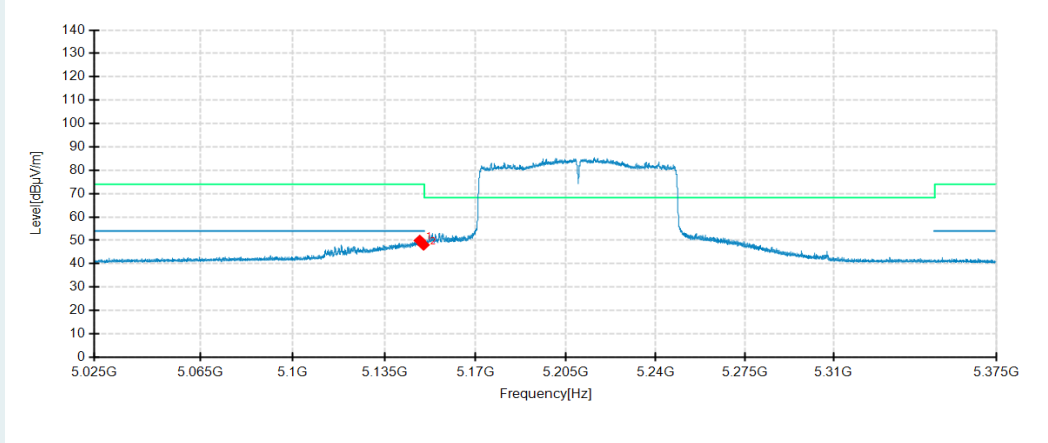

No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5145.7850	36.22	50.41	14.19	54.00	3.59	100	280	Horizontal	/
2	5150.0000	34.99	49.17	14.18	54.00	4.83	100	280	Horizontal	/
1	5148.5500	35.86	49.94	14.08	54.00	4.06	100	167	Vertical	/
2	5150.0000	33.99	48.07	14.08	54.00	5.93	200	280	Vertical	/


Remark: Max field strength in 3m distance. No any other emission which falls in restricted bands can be detected and be reported.

----- The following blanks -----

802.11a mode/5745MHz


Environment: Temp: 25℃; Humi:60%
Engineer: Lu Qiang
Detector mode: Peak

Voltage: DC 3.85V
Data: 2022-03-18
Polarity: Horizontal

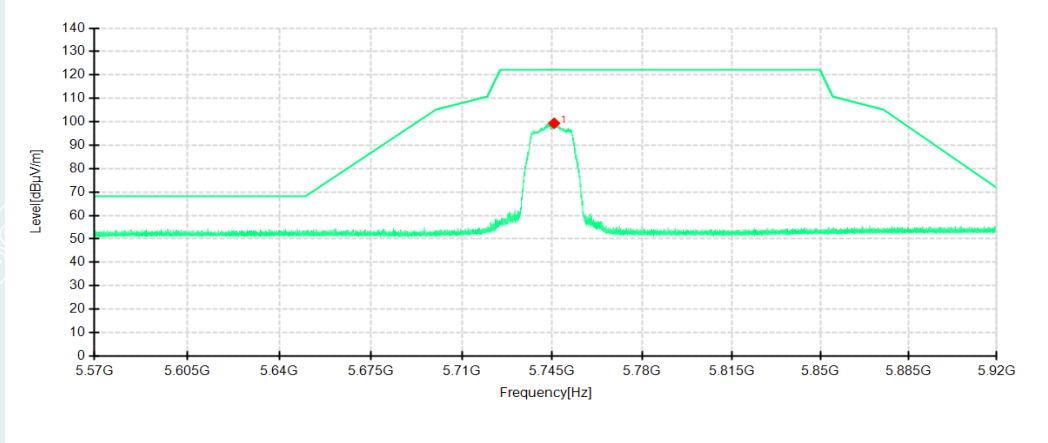

Detector mode: Peak

Polarity: Vertical

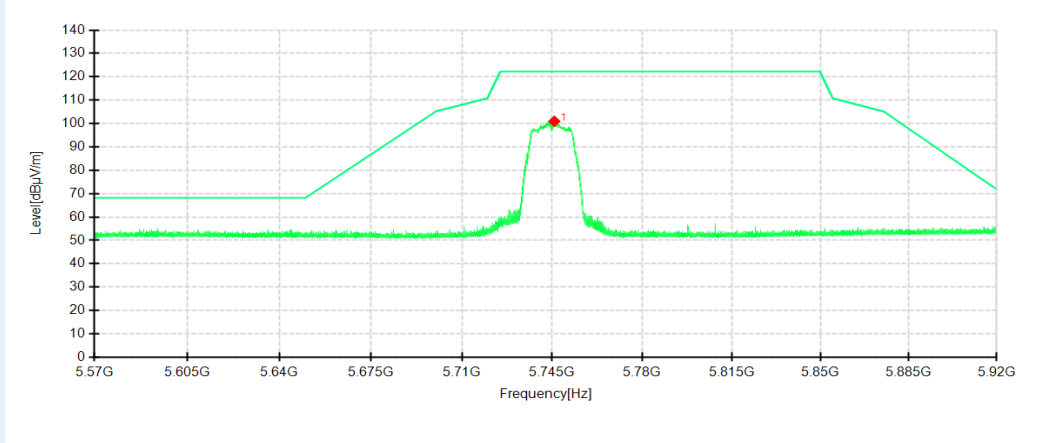

No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBuV/m	Margin dB	Height cm	Angle °	Pole
1	5745.7350	84.03	99.37	15.34	122.20	22.83	200	87	Horizontal
1	5745.7875	85.71	100.94	15.23	122.20	21.26	200	251	Vertical

----- The following blanks -----

802.11a mode/5785MHz

Environment: Temp: 25℃; Humi:60%


Engineer: Lu Qiang

Detector mode: Peak

Voltage: DC 3.85V


Data: 2022-03-18

Polarity: Horizontal

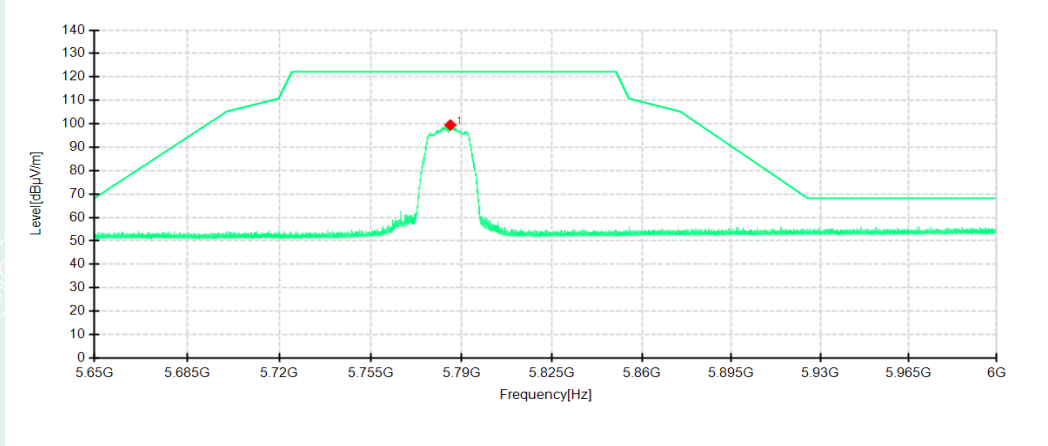

Detector mode: Peak

Polarity: Vertical

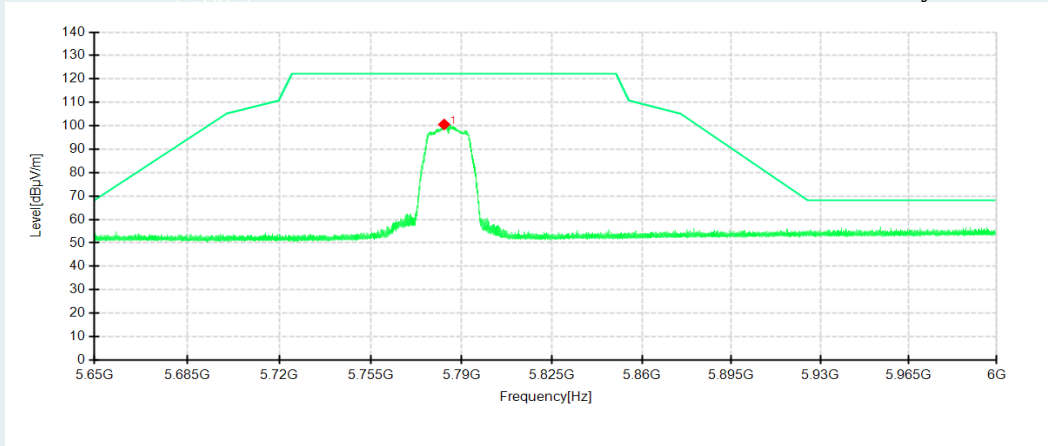

No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole
1	5785.6425	83.95	99.50	15.55	122.20	22.70	200	172	Horizontal
1	5783.2450	85.20	100.57	15.37	122.20	21.63	200	254	Vertical

----- The following blanks -----

802.11a mode/5825MHz

Environment: Temp: 25℃; Humi:60%


Engineer: Lu Qiang

Detector mode: Peak

Voltage: DC 3.85V


Data: 2022-03-18

Polarity: Horizontal

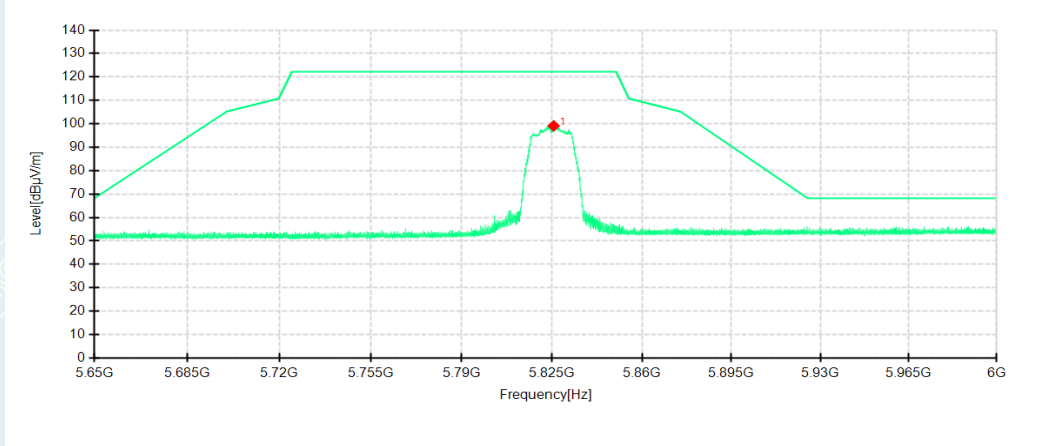

Detector mode: Peak

Polarity: Vertical

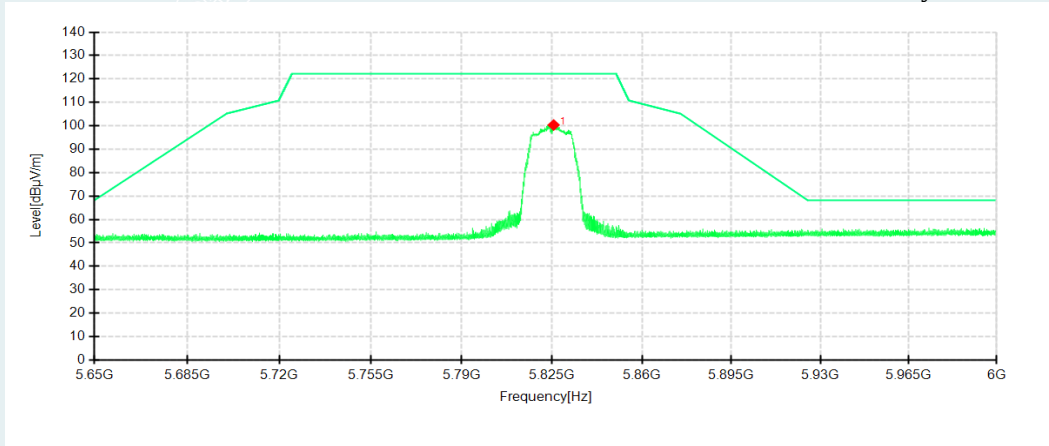

No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole
1	5825.5775	83.23	99.12	15.89	122.20	23.08	200	98	Horizontal
1	5825.5775	84.65	100.34	15.69	122.20	21.86	200	262	Vertical

----- The following blanks -----

802.11n HT20 mode/5745MHz

Environment: Temp: 25℃; Humi:60%


Engineer: Lu Qiang

Detector mode: Peak

Voltage: DC 3.85V


Data: 2022-03-18

Polarity: Horizontal

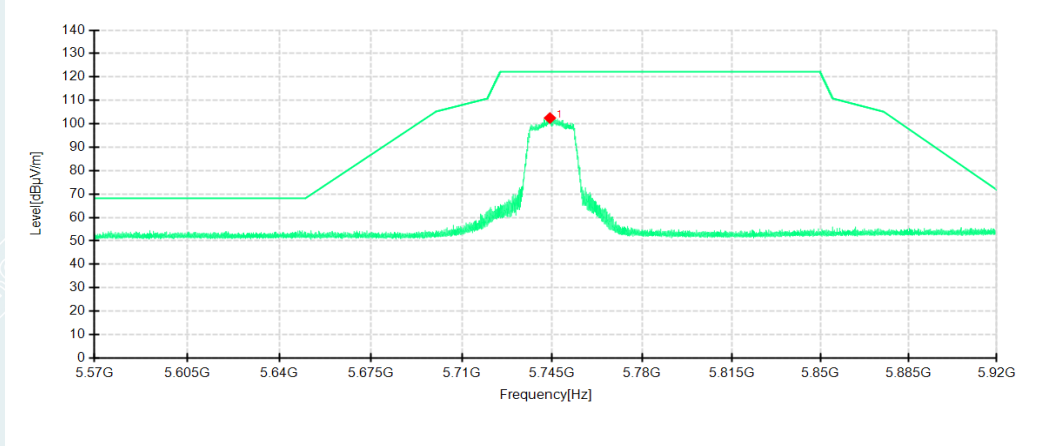

Detector mode: Peak

Polarity: Vertical

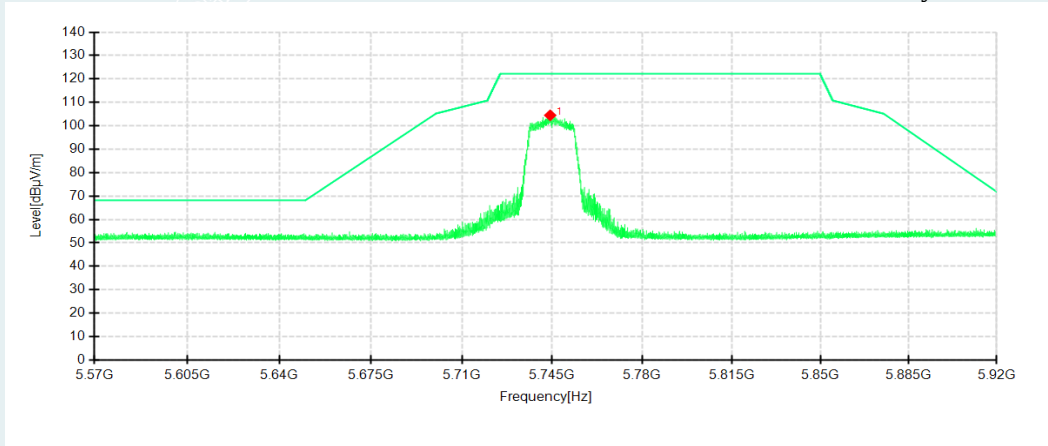

No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole
1	5744.0900	87.13	102.46	15.33	122.20	19.74	200	92	Horizontal
1	5744.1950	89.26	104.48	15.22	122.20	17.72	200	251	Vertical

----- The following blanks -----

802.11n HT20 mode/5785MHz

Environment: Temp: 25℃; Humi:60%


Engineer: Lu Qiang

Detector mode: Peak

Voltage: DC 3.85V


Data: 2022-03-18

Polarity: Horizontal

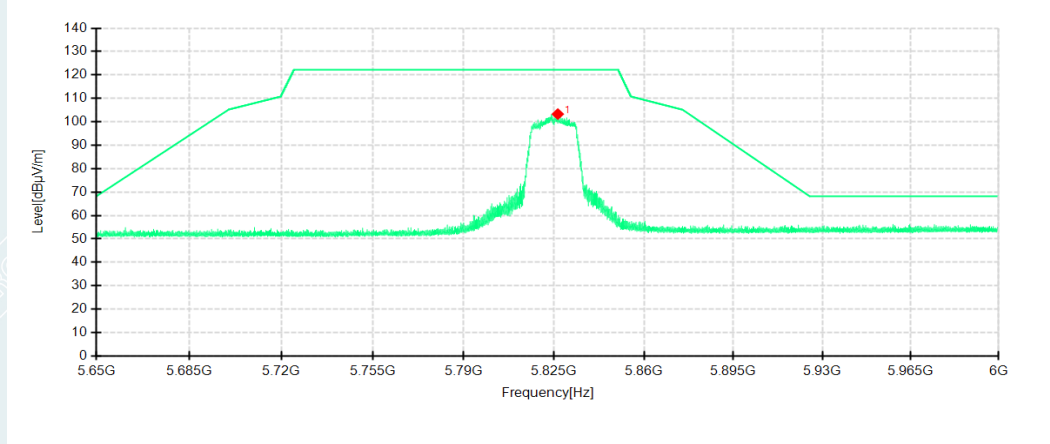

Detector mode: Peak

Polarity: Vertical

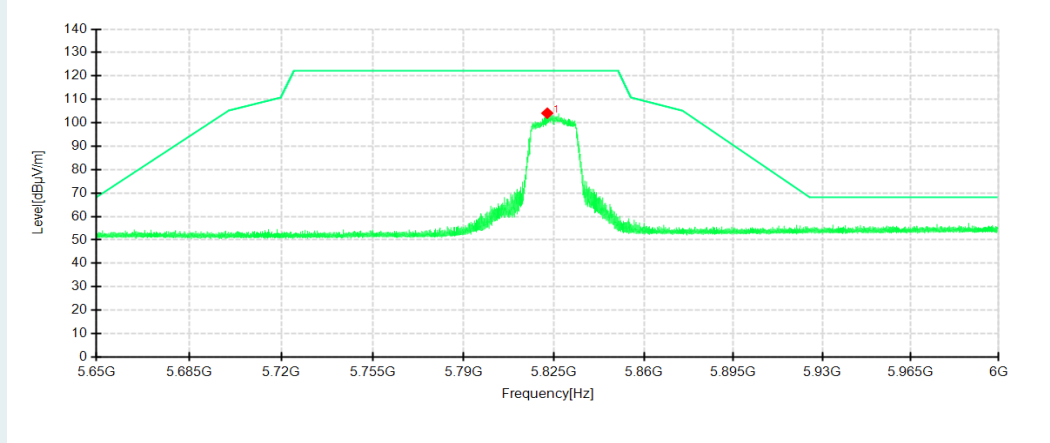


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole
1	5826.4175	87.40	103.29	15.89	122.20	18.91	200	94	Horizontal
1	5822.3225	88.45	104.10	15.65	122.20	18.10	200	262	Vertical

----- The following blanks -----

802.11n HT20 mode/5825MHz


Environment: Temp: 25℃; Humi:60%
Engineer: Lu Qiang
Detector mode: Peak

Voltage: DC 3.85V
Data: 2022-03-18
Polarity: Horizontal

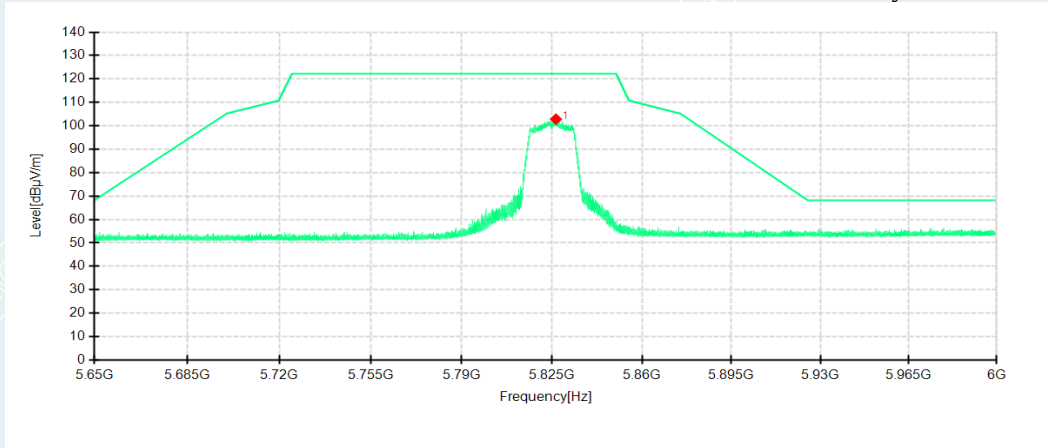

Detector mode: Peak

Polarity: Vertical

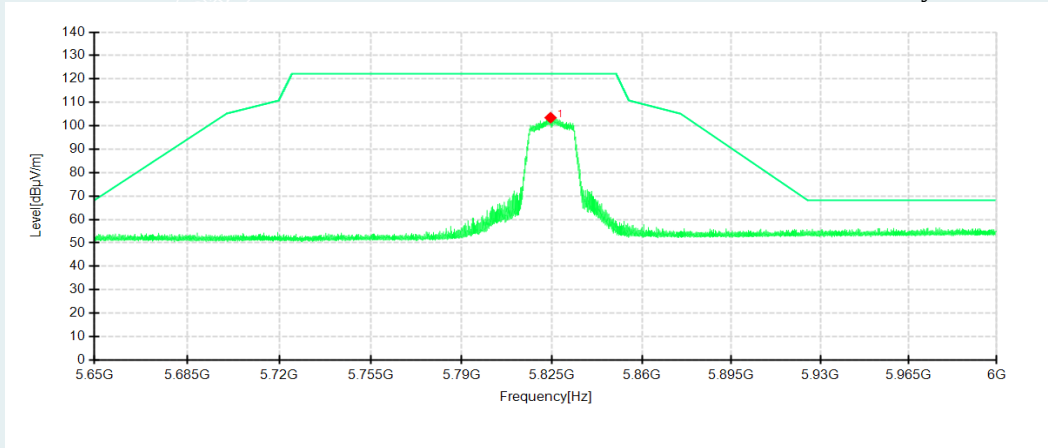

No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole
1	5826.4525	86.93	102.83	15.90	122.20	19.37	100	250	Horizontal
1	5824.3700	87.78	103.45	15.67	122.20	18.75	200	251	Vertical

----- The following blanks -----

802.11n HT40 mode/5755MHz

Environment: Temp: 25℃; Humi:60%


Engineer: Lu Qiang

Detector mode: Peak

Voltage: DC 3.85V


Data: 2022-03-18

Polarity: Horizontal

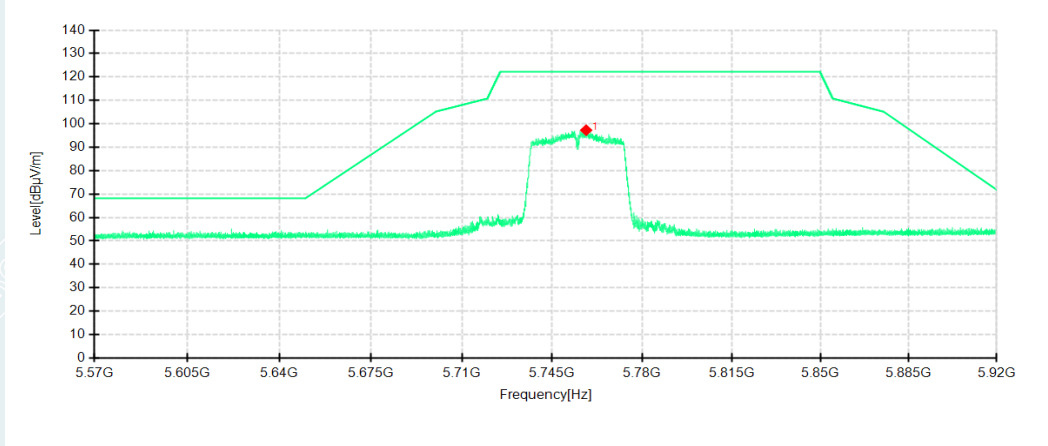

Detector mode: Peak

Polarity: Vertical

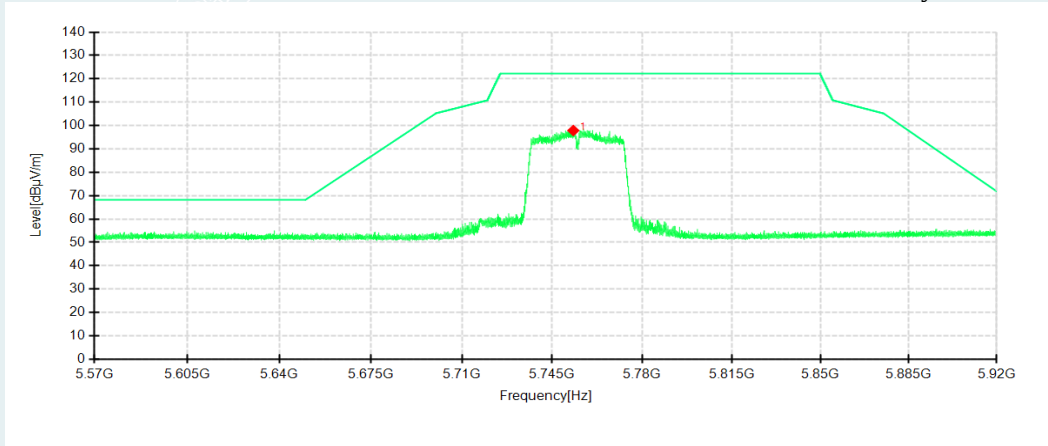

No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole
1	5758.1600	81.87	97.27	15.40	122.20	24.93	200	175	Horizontal
1	5753.1725	82.59	97.86	15.27	122.20	24.34	200	248	Vertical

802.11n HT40 mode/5795MHz

Environment: Temp: 25℃; Humi:60%


Engineer: Lu Qiang

Detector mode: Peak

Voltage: DC 3.85V


Data: 2022-03-18

Polarity: Horizontal

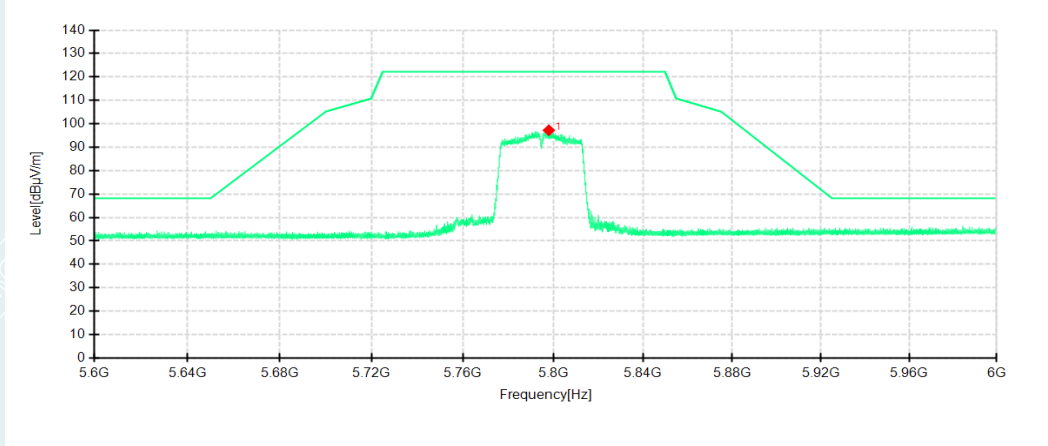

Detector mode: Peak

Polarity: Vertical

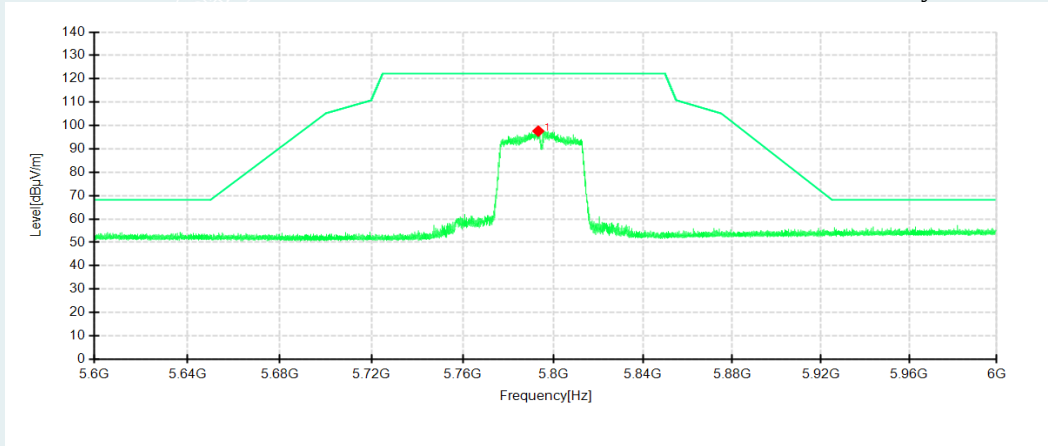

No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole
1	5798.0800	81.62	97.23	15.61	122.20	24.97	200	173	Horizontal
1	5793.4000	82.23	97.63	15.40	122.20	24.57	200	262	Vertical

802.11ac VHT20 mode/5745MHz

Environment: Temp: 25°C; Humi:60%


Engineer: Lu Qiang

Detector mode: Peak

Voltage: DC 3.85V


Data: 2022-03-18

Polarity: Horizontal

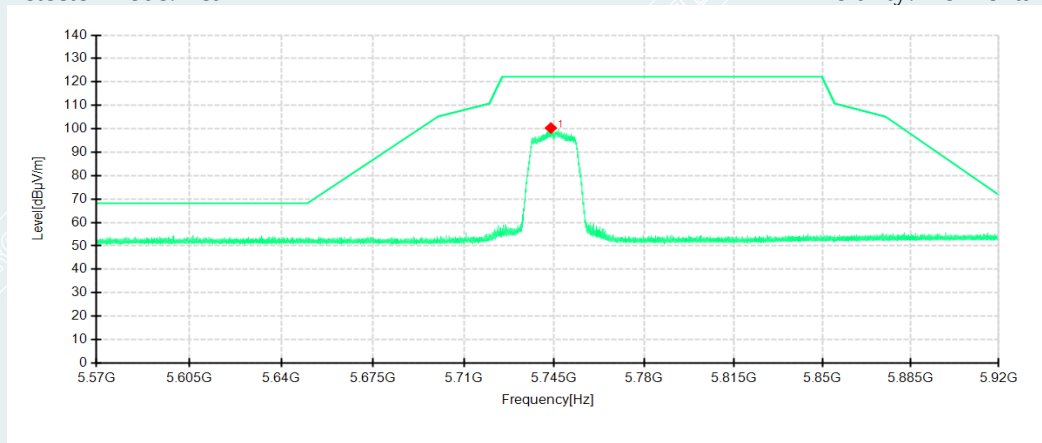

Detector mode: Peak

Polarity: Vertical

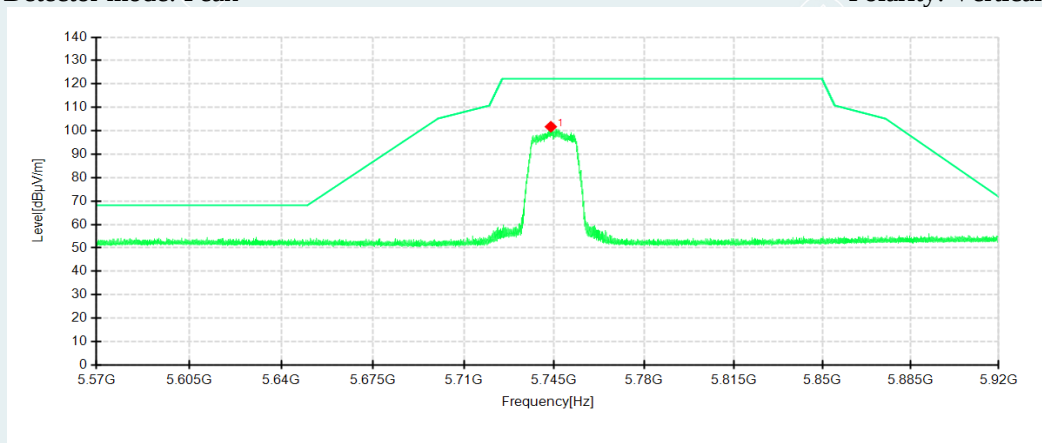

No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole
1	5743.6875	84.99	100.32	15.33	122.20	21.88	200	86	Horizontal
1	5743.6700	86.52	101.74	15.22	122.20	20.46	200	252	Vertical

802.11ac VHT20 mode/5785MHz

Environment: Temp: 25℃; Humi:60%


Engineer: Lu Qiang

Detector mode: Peak

Voltage: DC 3.85V


Data: 2022-03-18

Polarity: Horizontal

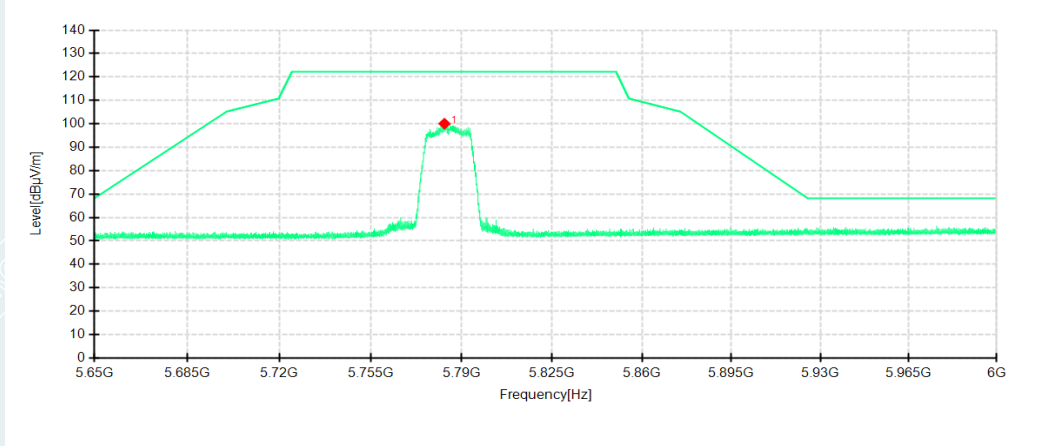

Detector mode: Peak

Polarity: Vertical

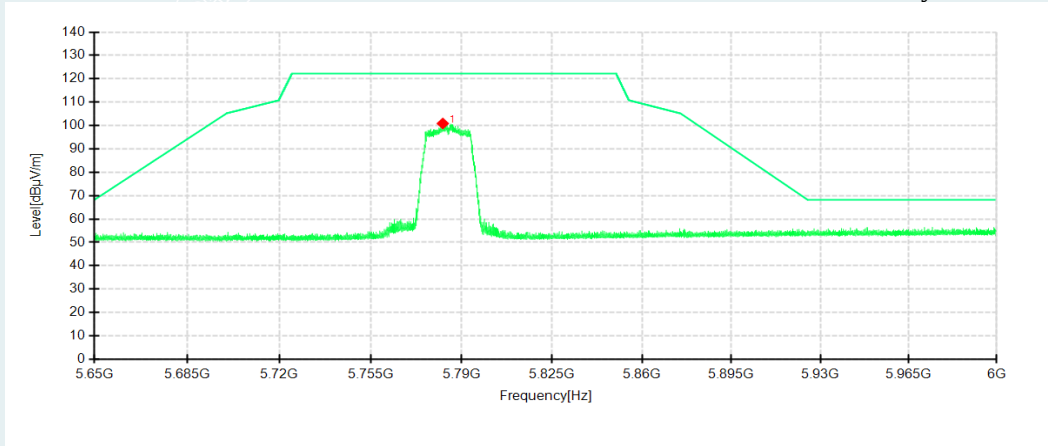

No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole
1	5783.3500	84.52	100.05	15.53	122.20	22.15	200	94	Horizontal
1	5782.7200	85.51	100.87	15.36	122.20	21.33	200	258	Vertical