


CH 39

Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
2483.525000	-38.7	29.5	-9.2	PASS
2484.225000	-39.0	29.8	-9.2	PASS
2484.175000	-39.0	29.8	-9.2	PASS
2483.625000	-39.2	29.9	-9.2	PASS
2483.675000	-39.5	30.2	-9.2	PASS
2484.425000	-39.6	30.4	-9.2	PASS
2484.475000	-39.6	30.4	-9.2	PASS
2483.575000	-39.7	30.4	-9.2	PASS
2484.125000	-39.8	30.5	-9.2	PASS
2483.825000	-39.9	30.7	-9.2	PASS
2484.275000	-39.9	30.7	-9.2	PASS
2483.725000	-40.1	30.9	-9.2	PASS
2484.525000	-40.2	31.0	-9.2	PASS
2483.775000	-40.2	31.0	-9.2	PASS
2484.575000	-40.5	31.3	-9.2	PASS

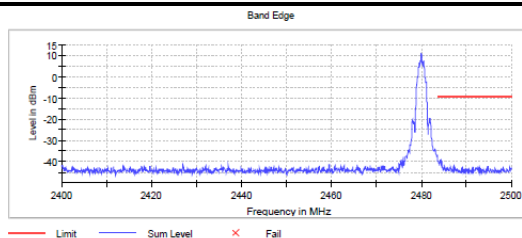

Measurement 1

Setting	Instrument Value	Target Value
Start Frequency	2.40000 GHz	2.40000 GHz
Stop Frequency	2.48350 GHz	2.48350 GHz
Span	83.500 MHz	83.500 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1670	~ 1670
SweepTime	94.727 μ s	AUTO
Reference Level	-30.000 dBm	-30.000 dBm
Attenuation	0.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamplifier	off	off
StableMode	Trace	Trace
StableValue	0.50 dB	0.50 dB
Run	6 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.29 dB	0.50 dB

Measurement 2

Setting	Instrument Value	Target Value
Start Frequency	2.48350 GHz	2.48350 GHz
Stop Frequency	2.50000 GHz	2.50000 GHz
Span	16.500 MHz	16.500 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	330	~ 330
SweepTime	18.945 μ s	AUTO
Reference Level	-30.000 dBm	-30.000 dBm
Attenuation	0.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamplifier	off	off
StableMode	Trace	Trace
StableValue	0.50 dB	0.50 dB
Run	4 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.00 dB	0.50 dB



5 PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the Test Setup Photos exhibit.



6 APPENDIX A – MODIFICATIONS

No modifications to the EUT during testing.

---END OF REPORT---