

Appendix B

WCDMA Band II & IV & V

TABLE OF CONTENTS

1.	MAIN TEST INSTRUMENTS	3
2.	MEASUREMENT UNCERTAINTY.....	3
3.	EFFECTIVE (ISOTROPIC) RADIATED POWER.....	4
3.1.	TEST RESULT	4
4.	PEAK-TO-AVERAGE RATIO(CCDF).....	5
4.1.	TEST RESULT	5
4.2.	TEST PLOTS.....	5
5.	MODULATION CHARACTERISTICS	9
5.1.	TEST BAND = WCDMA BAND II.....	9
5.1.1.	TEST MODE = UMTS/TM1	9
5.1.1.1.	TEST CHANNEL = MCH.....	9
5.2.	TEST BAND = WCDMA BAND IV	10
5.2.1.	TEST MODE = UMTS/TM1	10
5.2.1.1.	TEST CHANNEL = MCH.....	10
5.3.	TEST BAND = WCDMA BAND V	10
5.3.1.	TEST MODE = UMTS/TM1	10
5.3.1.1.	TEST CHANNEL = MCH.....	10
6.	26DB BANDWIDTH AND OCCUPIED BANDWIDTH	11
6.1.	TEST RESULT	11
6.2.	TEST PLOTS.....	11
7.	BAND EDGE COMPLIANCE	15
7.1.	TEST PLOTS.....	15
8.	SPURIOUS EMISSION AT ANTENNA TERMINAL	18
8.1.	TEST PLOTS.....	18
9.	FREQUENCY STABILITY	35
9.1.	FREQUENCY VS VOLTAGE	35
9.2.	FREQUENCY VS TEMPERATURE	36

1. Main Test Instruments

RE in Chamber					
Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date	Cal. Due date
				(yyyy-mm-dd)	(yyyy-mm-dd)
3m Semi-Anechoic Chamber	AUDIX	N/A	SEM001-02	2018/3/13	2021/3/12
Spectrum Analyzer (20Hz-43GHz)	Rohde & Schwarz	FSU43	SEM004-08	2019/3/2	2020/3/1
BiConiLog Antenna (26-3000MHz)	ETS-Lindgren	3142C	SEM003-01	2017/6/27	2020/6/26
Horn Antenna (800MHz-18GHz)	Rohde & Schwarz	HF907	SEM003-07	2018/4/13	2021/4/12
Horn Antenna (15-40GHz)	Schwarzbeck	BBHA 9170	SEM003-15	2017/10/17	2020/10/16
Amplifier (0.1-1300MHz)	HP	8447D	SEM005-02	2019/7/14	2020/7/14
Low Noise Amplifier (100MHz-18GHz)	Black Diamond Series	BDLNA-0118-352810	SEM005-05	2019/7/14	2020/7/14
Pre-Amplifier (0.1-26.5GHz)	Compliance Directions Systems Inc.	PAP-0126	EMC2063	2019/9/20	2020/9/19
Pre-amplifier (26-40GHz)	Compliance Directions Systems Inc.	PAP-2640-50	SEM005-08	2019/3/2	2020/3/1
Band filter	N/A	N/A	N/A	N/A	N/A
Measurement Software	AUDIX	e3 V8.2014-6-27	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM026-01	2019/6/12	2020/6/11
Wideband Radio Communication Tester	Anristu	MT8821C	6201462742	2019/4/3	2020/4/3
Wideband Radio Communication Tester	Rohde & Schwarz	CMW500	W005-02	2019/1/13	2020/1/12
RF conducted test					
Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date	Cal. Due date
				(yyyy-mm-dd)	(yyyy-mm-dd)
Dual Output Mobile Communication DC Source	Agilent Technologies Inc	66311B	W009-09	2018/11/2	2019/11/1
Signal Analyzer	Rohde & Schwarz	FSV	W005-02	2019/3/2	2020/3/1
Coaxial Cable	SGS	N/A	SEM031-01	2019/6/12	2020/6/11
Attenuator	Weinschel Associates	WA41	SEM021-09	N/A	N/A
Signal Generator	KEYSIGHT	N5173B	SEM006-05	2018/11/2	2019/11/1
Humidity/ Temperature Indicator	Shanghai Meteorological Industry Factory	HTC-1	W006-17	2018/11/2	2019/11/1
Temperature Chamber	GIANT FORCE	ICT-150-40-CP-AR	W027-03	2018/11/2	2019/11/1
Wideband Radio Communication Tester	Anristu	MT8821C	6201462742	2019/3/2	2020/3/1

2. Measurement Uncertainty

For a 95% confidence level ($k = 2$), the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 as following:

Test Item	Extended Uncertainty	Data
Transmit Output Power Data	Power [dBm]	$U = \pm 0.37$ dB
Bandwidth	Magnitude [%]	$U = \pm 0.2\%$
Band Edge Compliance	Disturbance Power [dBm]	$U = \pm 2.0$ dB
Spurious Emissions, Conducted	Disturbance Power [dBm]	$U = \pm 2.0$ dB
Frequency Stability	Frequency Accuracy [ppm]	$U = \pm 0.24$ ppm

3. Effective (Isotropic) Radiated Power

3.1. Test Result

Band	Channel	Conducted Power (dBm)	EIRP (dBm)	Limit(dBm)	Verdict
Band II	9262	23.76	22.89	33.00	PASS
Band II	9400	23.78	22.91	33.00	PASS
Band II	9538	23.81	22.94	33.00	PASS
Band IV	4132	24.16	26.21	30.00	PASS
Band IV	4182	24.07	26.12	30.00	PASS
Band IV	4233	24.23	26.28	30.00	PASS

Band	Channel	Conducted Power (dBm)	EIRP (dBm)	Limit(dBm)	Verdict
Band V	4132	24.40	20.5	38.45	PASS
Band V	4182	24.31	20.41	38.45	PASS
Band V	4233	24.29	20.39	38.45	PASS

Remark:

a: For getting the EIRP (Efficient Isotropic Radiated Power), the following formula should be taken to calculate it,

$$ERP \text{ [dBm]} = \text{Conducted Power [dBm]} + \text{Gain [dBd]}$$


$$EIRP \text{ [dBm]} = \text{Conducted Power [dBm]} + \text{Gain [dBi]}$$

4. Peak-to-Average Ratio(CCDF)


4.1. Test Result

Band	Channel	Peak-to-Average Ratio(dB)	Limit(dB)	Verdict
Band II	9262	3.22	13	PASS
Band II	9400	3.22	13	PASS
Band II	9538	3.25	13	PASS
Band IV	1312	3.22	13	PASS
Band IV	1413	3.19	13	PASS
Band IV	1513	3.19	13	PASS
Band V	4132	3.25	13	PASS
Band V	4182	3.22	13	PASS
Band V	4233	3.22	13	PASS


4.2. Test Plots

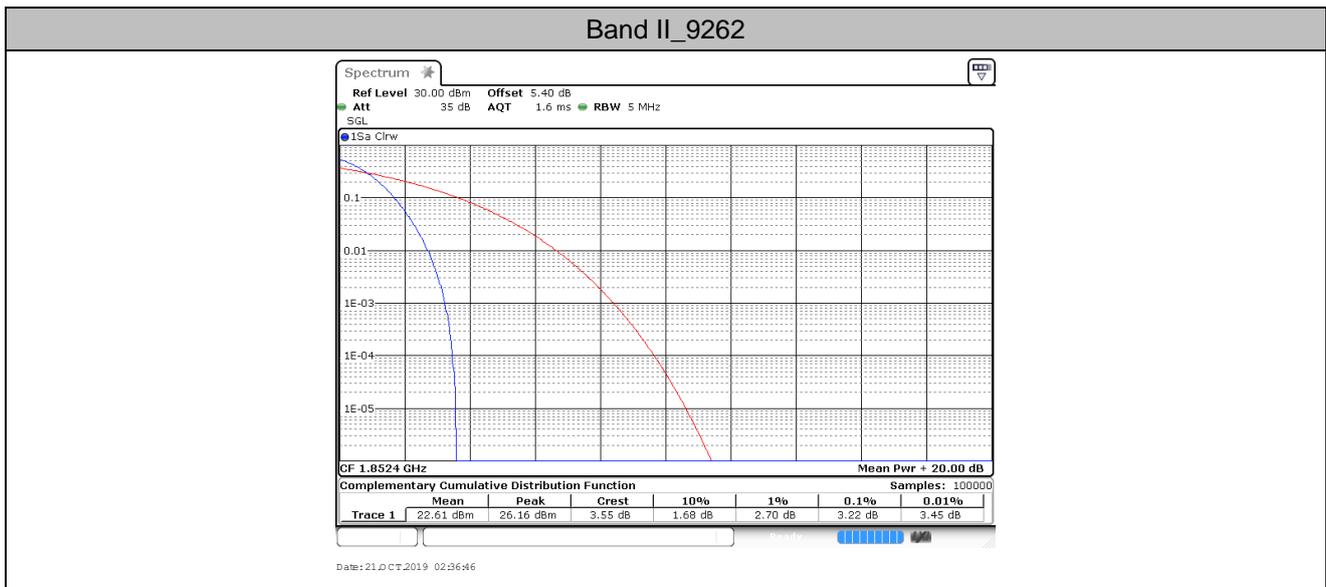


Band II_9400

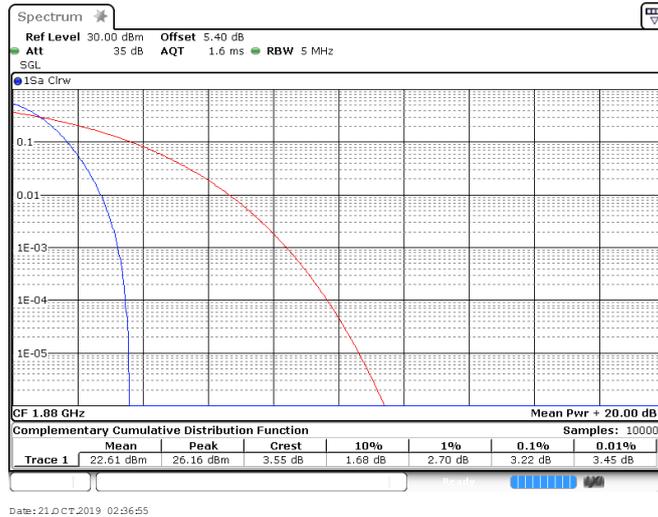


Band II_9538

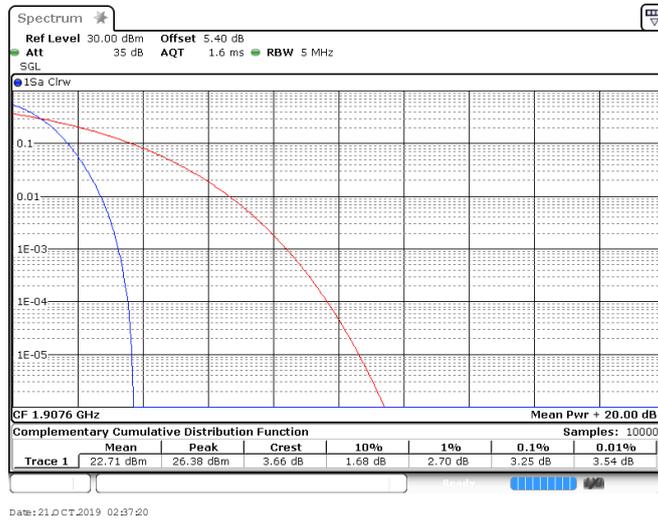


Band IV_1312

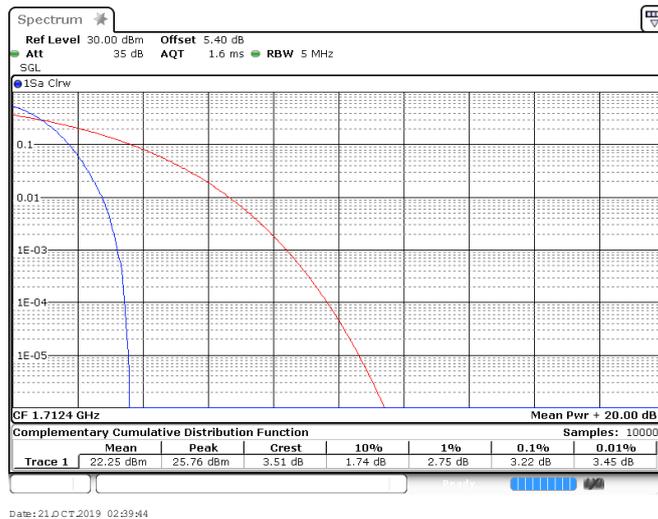


Band IV_1413

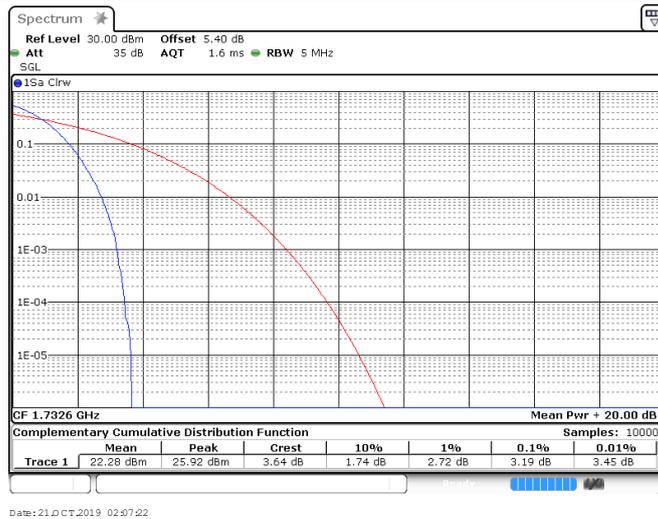


Band IV_1513

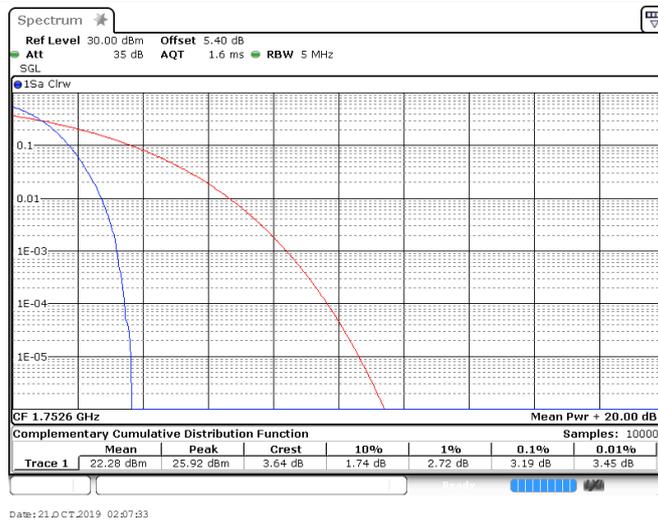


Band V_4132

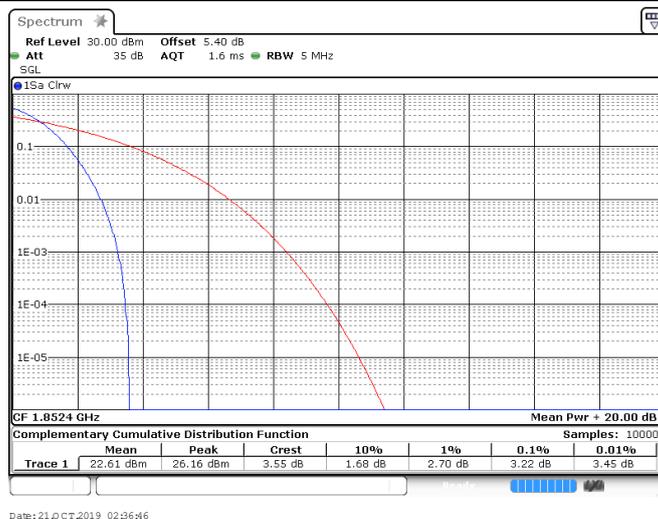

Band V_4182

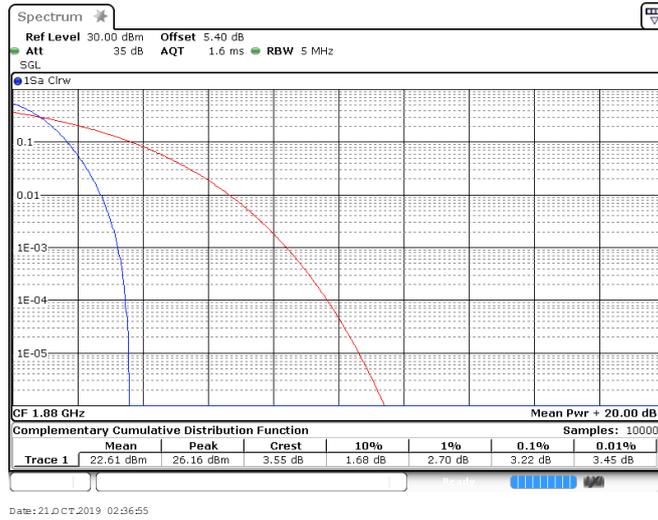

Band V_4233

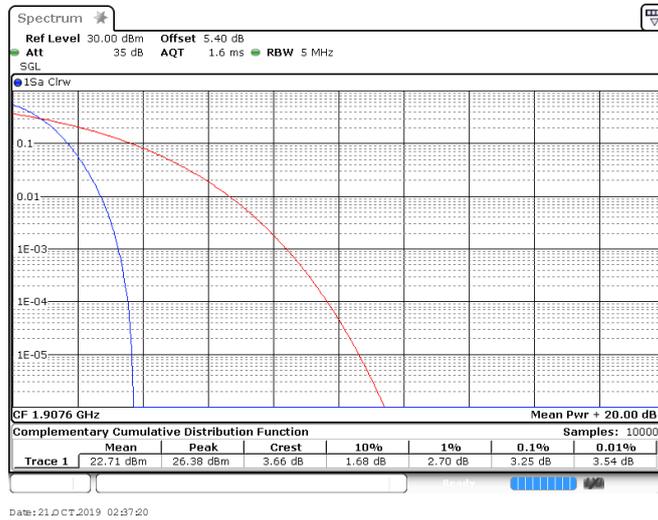


5. Modulation Characteristics

5.1. Test Band = WCDMA Band II

5.1.1. Test Mode = UMTS/TM1


5.1.1.1. Test Channel = MCH

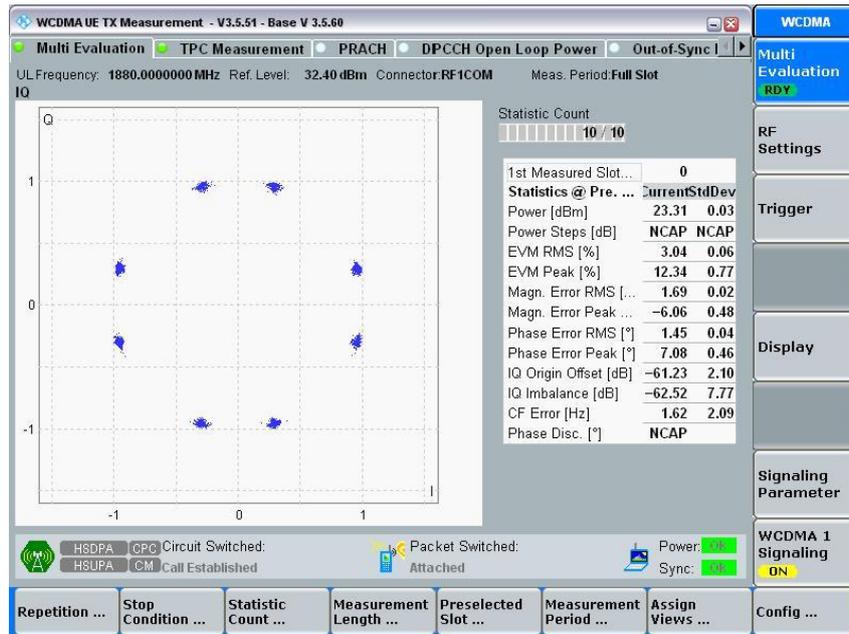

5.2. Test Band = WCDMA Band IV

5.2.1. Test Mode = UMTS/TM1


5.2.1.1. Test Channel = MCH

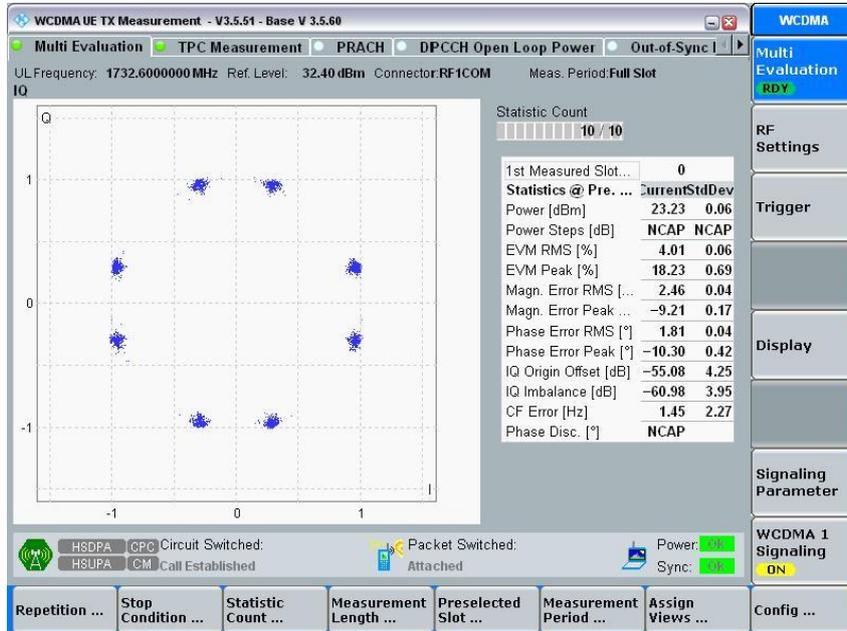

5.3. Test Band = WCDMA Band V

5.3.1. Test Mode = UMTS/TM1

5.3.1.1. Test Channel = MCH

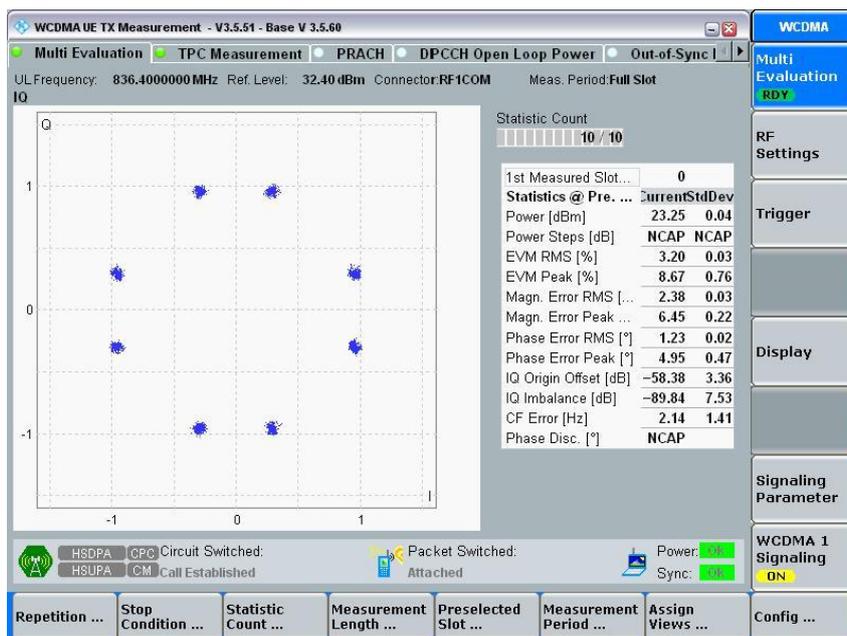

6. 26dB Bandwidth and Occupied Bandwidth


6.1. Test Result

Band	Channel	Occupied Bandwidth (kHz)	26dB Bandwidth (kHz)	Limit(kHz)	Verdict
Band II	9262	4167.9	4739	---	PASS
Band II	9400	4167.9	4725	---	PASS
Band II	9538	4167.9	4739	---	PASS
Band IV	1312	4182.3	4739	---	PASS
Band IV	1413	4167.9	4754	---	PASS
Band IV	1513	4182.3	4739	---	PASS
Band V	4132	4153.4	4710	---	PASS
Band V	4182	4167.9	4725	---	PASS
Band V	4233	4182.3	4725	---	PASS

6.2. Test Plots




Band II_9400

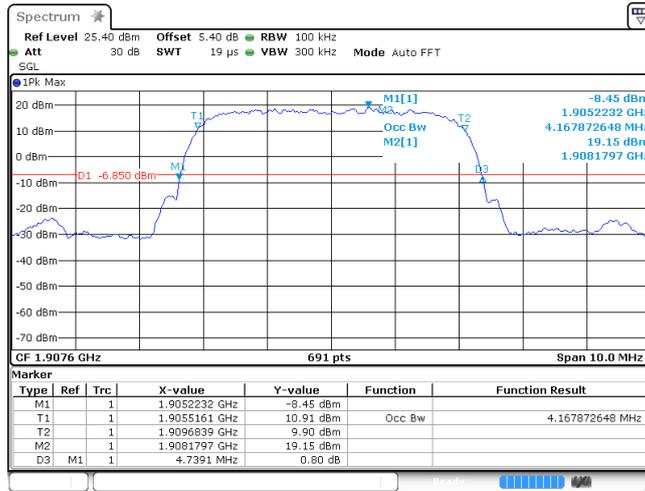


Date: 21 OCT 2019 01:51:54

Band II_9538

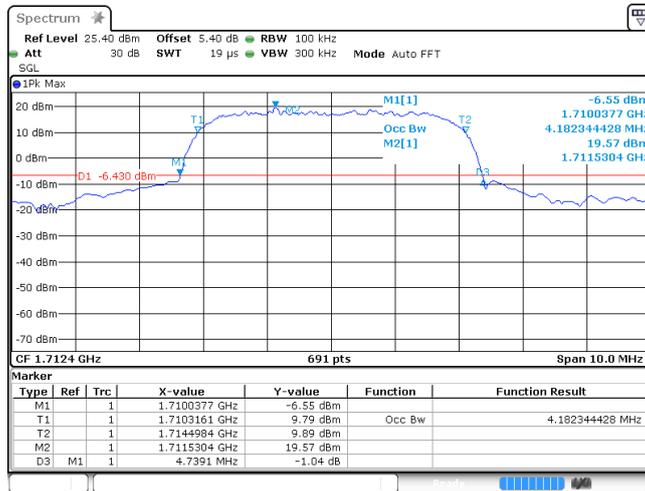


Date: 21 OCT 2019 02:12:46

Band IV_1312

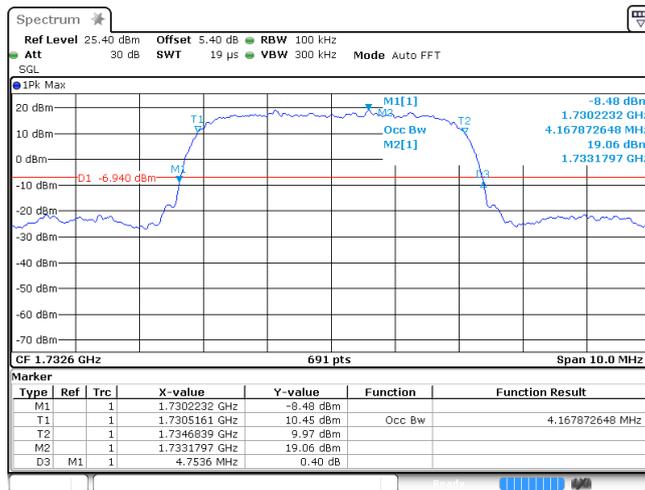


Date: 21 OCT 2019 02:13:10


Band IV_1413

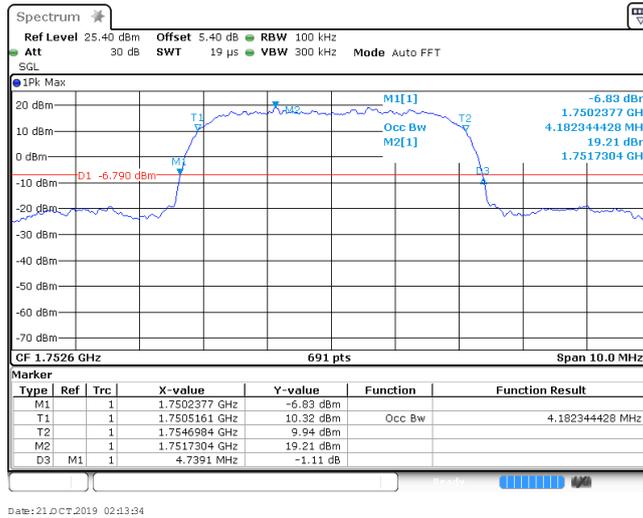


Band IV_1513

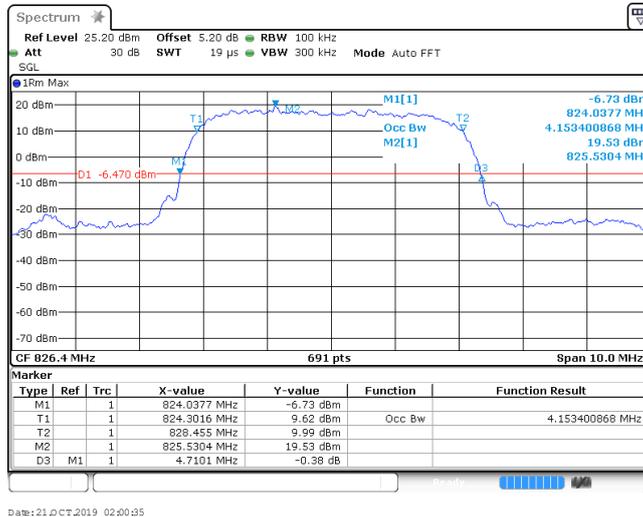

Band V_4132

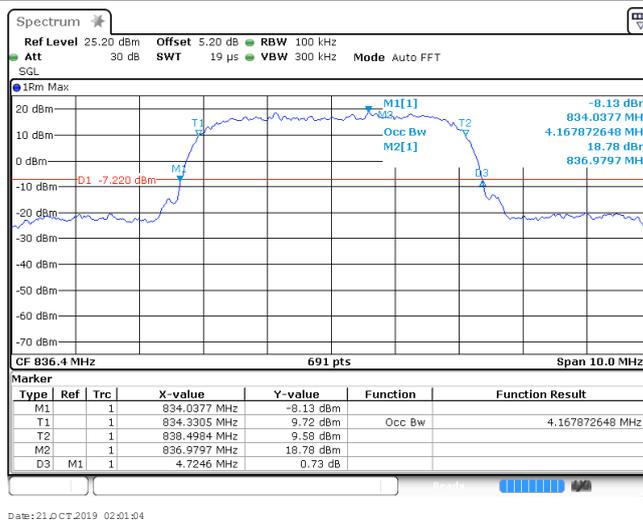

Band V_4182

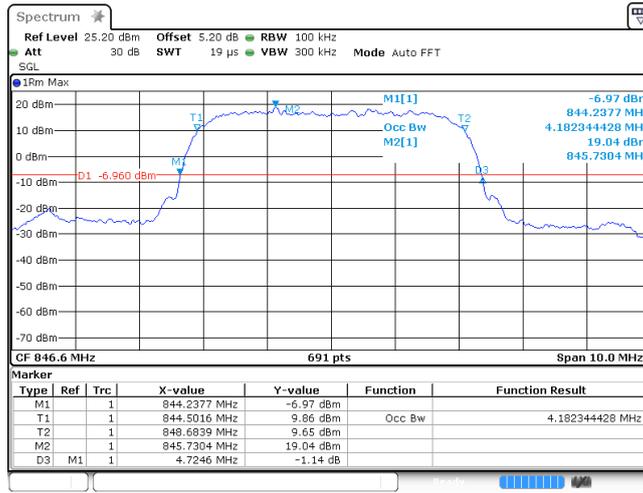

Date: 21 OCT 2019 02:01:34


Band V_4233

7. Band Edge Compliance


7.1. Test Plots




Band II_9262

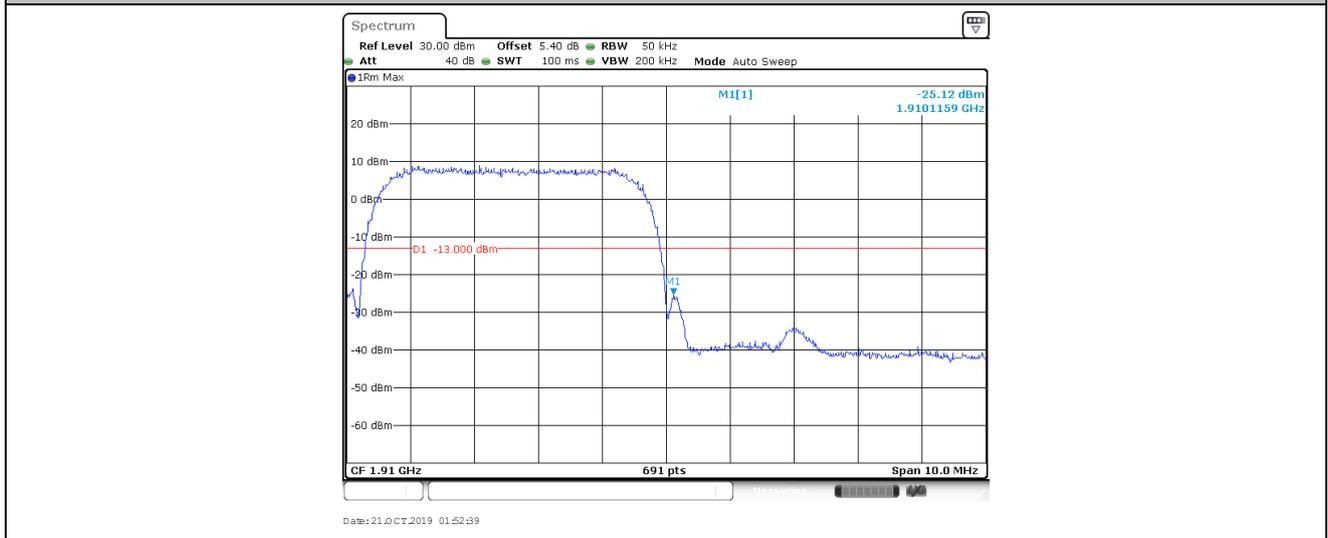


Band II_9538

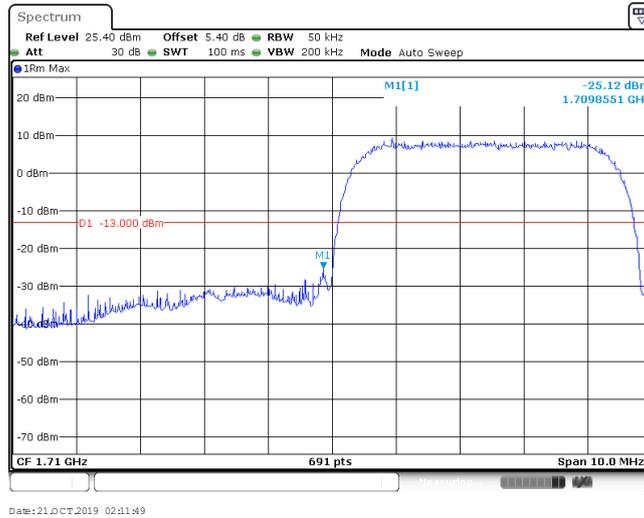

Band IV_1312

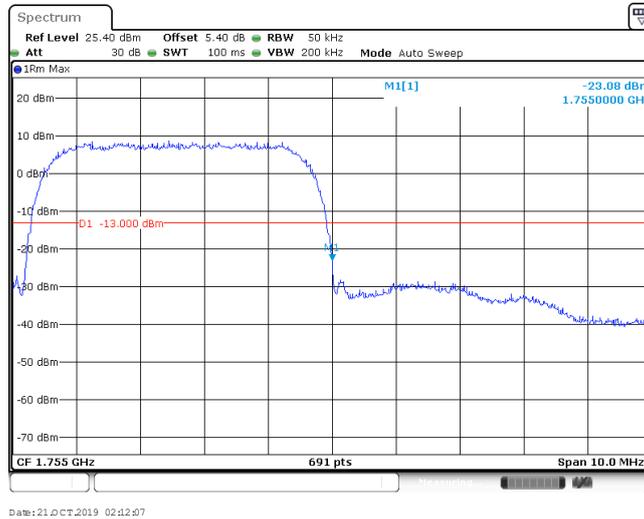

Band IV_1513

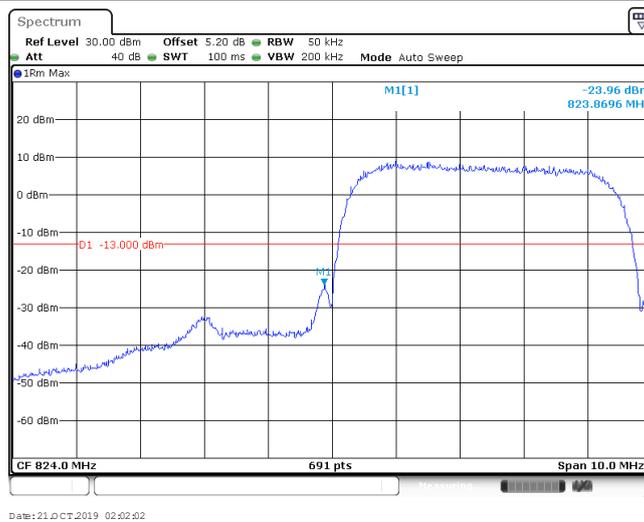

Band V_4132




Band V_4233


8. Spurious Emission at Antenna Terminal

Remark1: For the averaged unwanted emissions measurements, the measurement points in each sweep is greater than twice the Span/RBW in order to ensure bin-to-bin spacing of $< RBW/2$ so that narrowband signals are not lost between frequency bins. As to the present test item, the "Measurement Points = $k * (Span / RBW)$ " with k between 4 and 5, which results in an acceptable level error of less than 0.5 dB.


Remark2: only the worst case data displayed in this report.

8.1. Test Plots

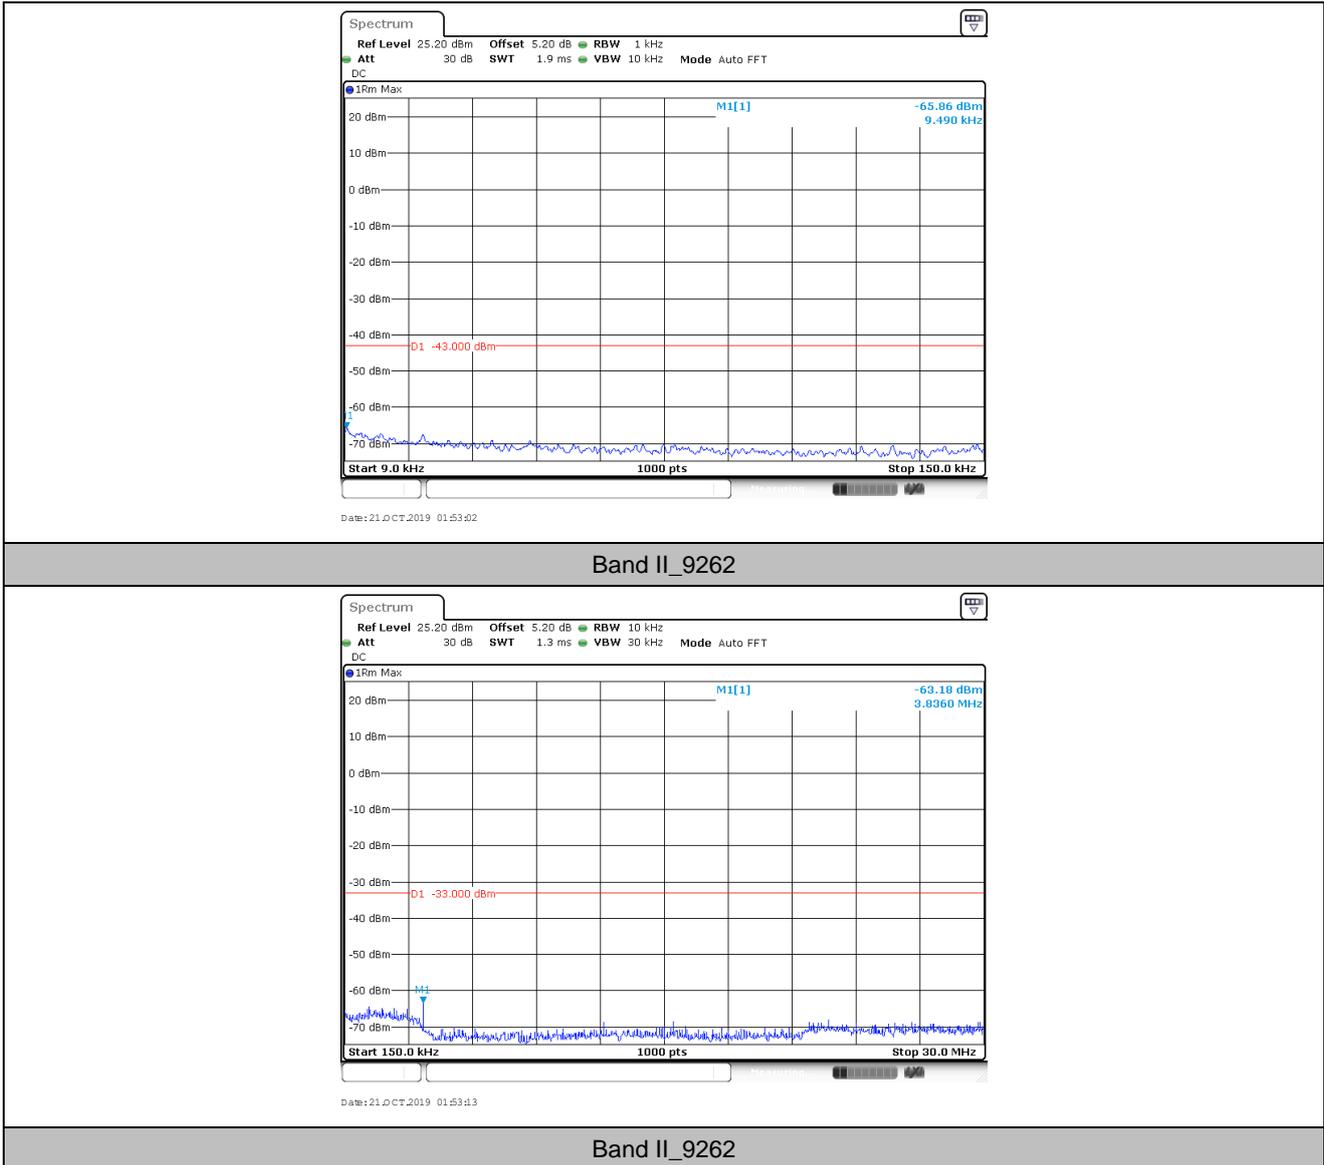


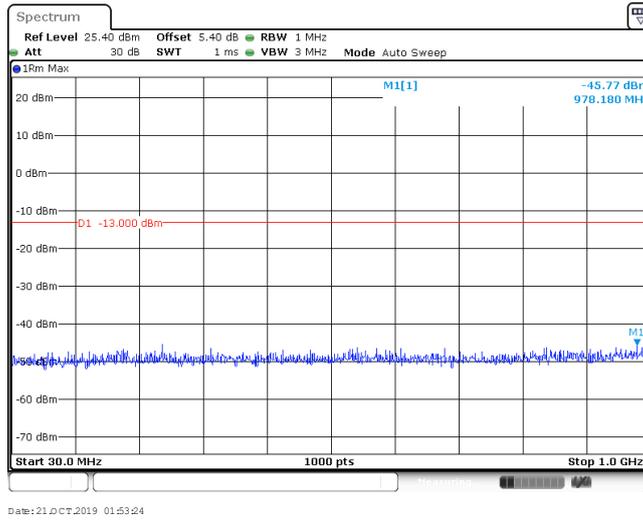


Band II_9262

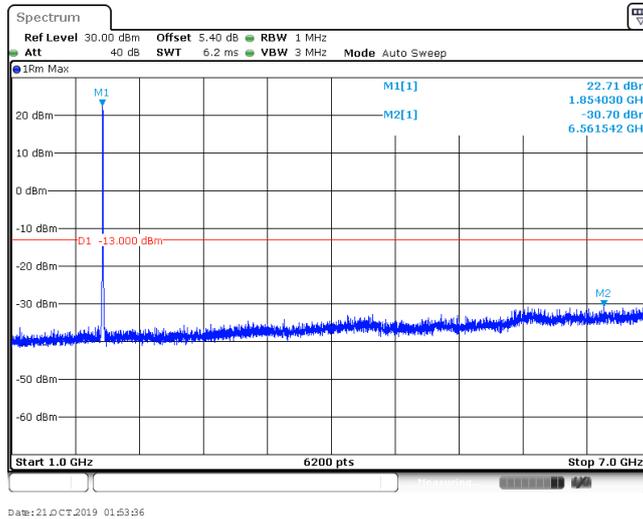


Band II_9262

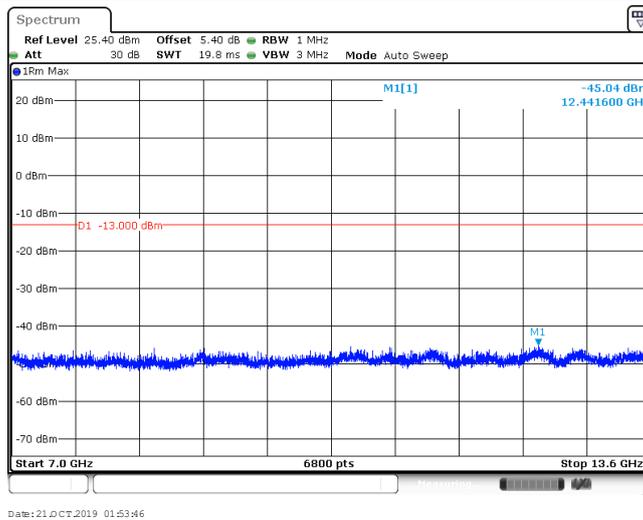


Band II_9262

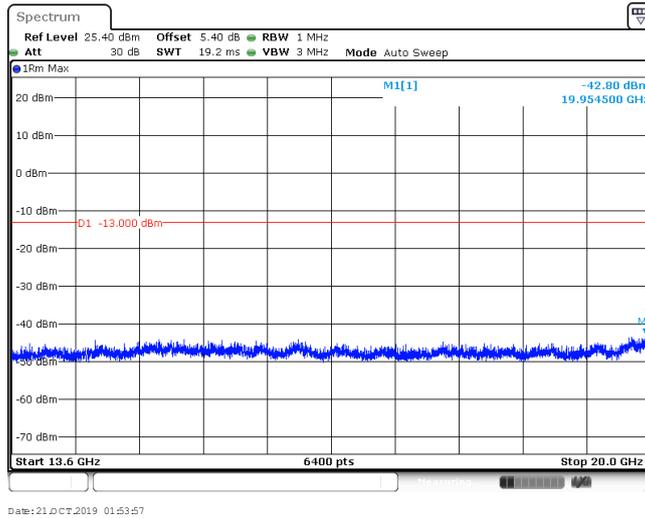


Band II_9262

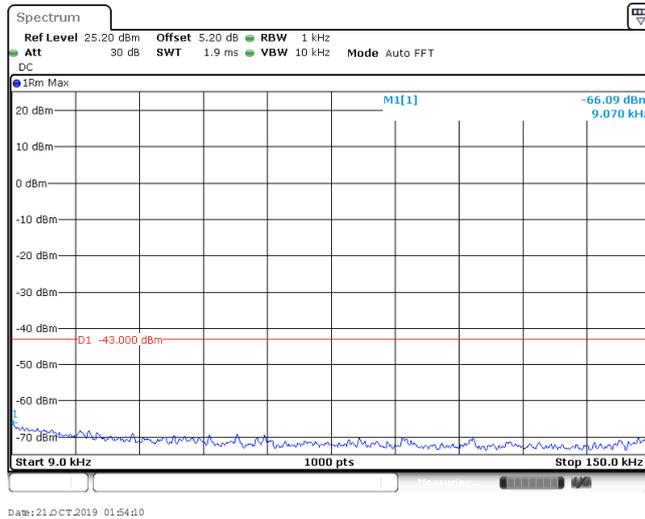


Band II_9400

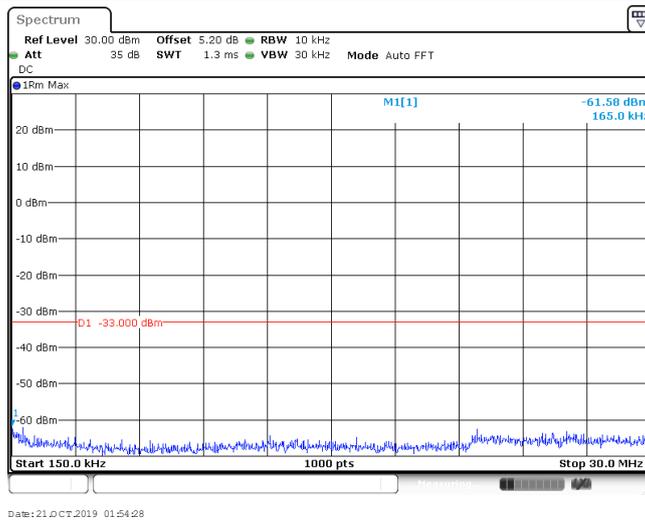


Band II_9400

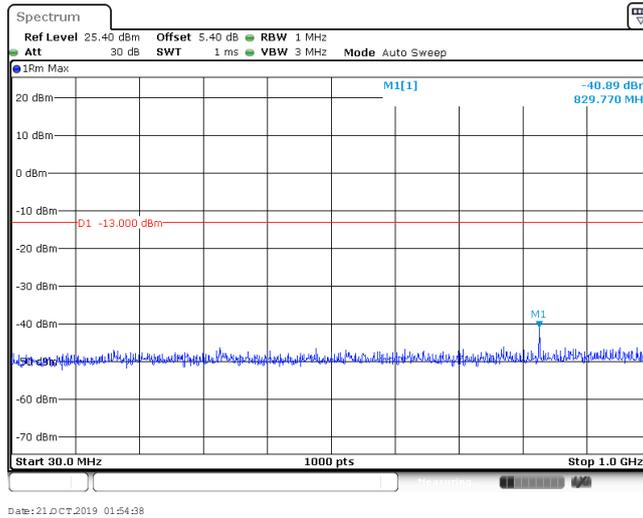


Band II_9400

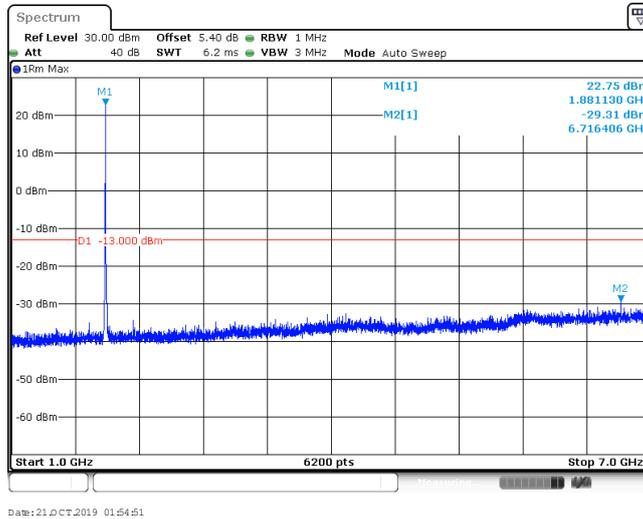


Band II_9400

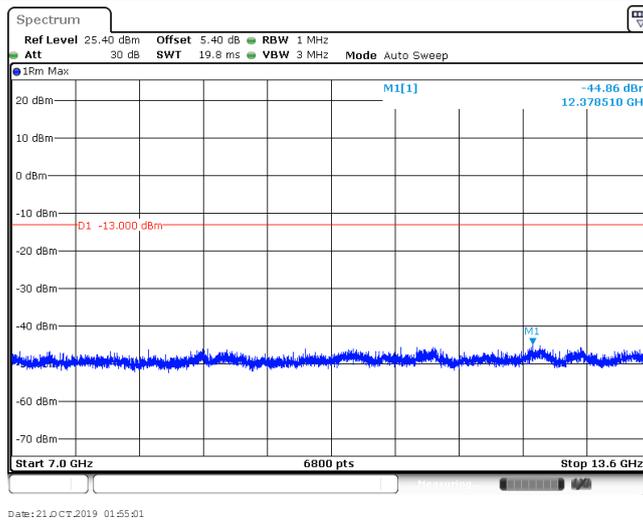


Band II_9400

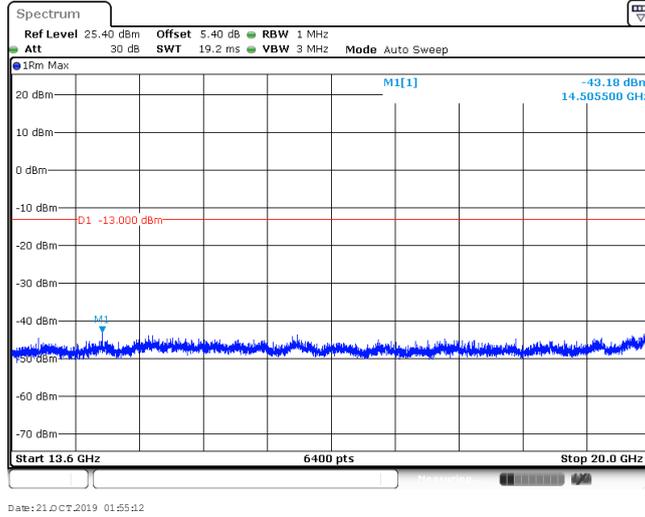


Band II_9400

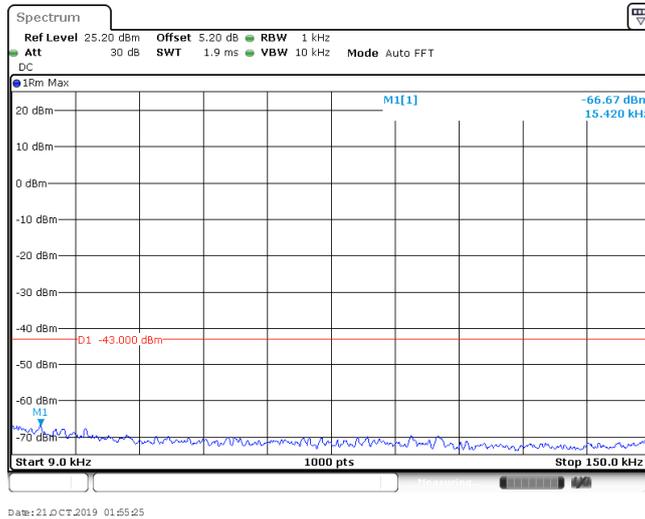


Band II_9538

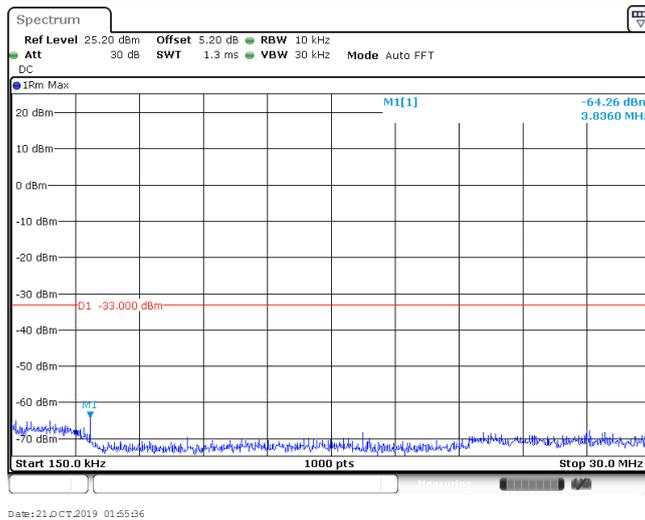


Band II_9538

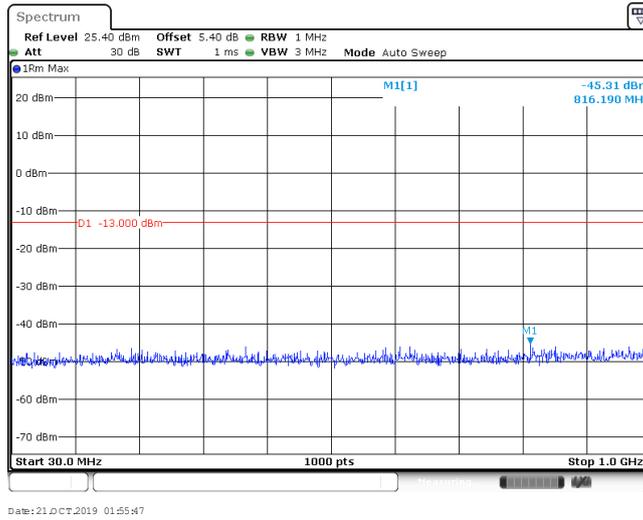


Band II_9538

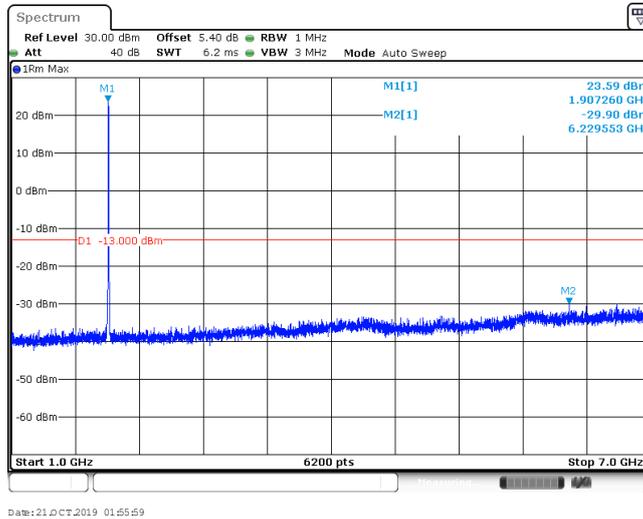


Band II_9538

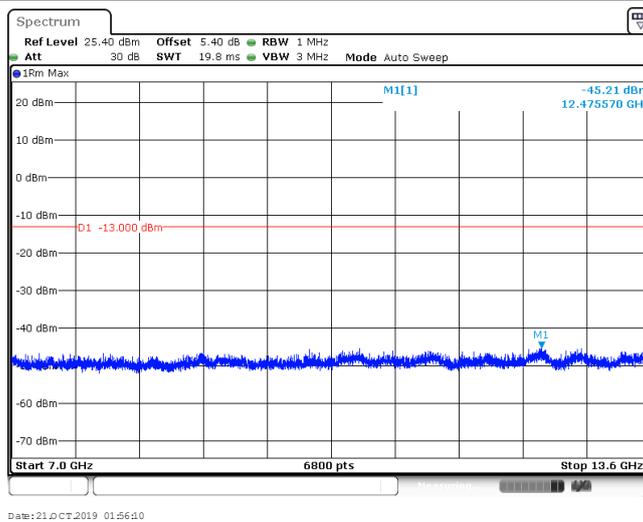


Band II_9538

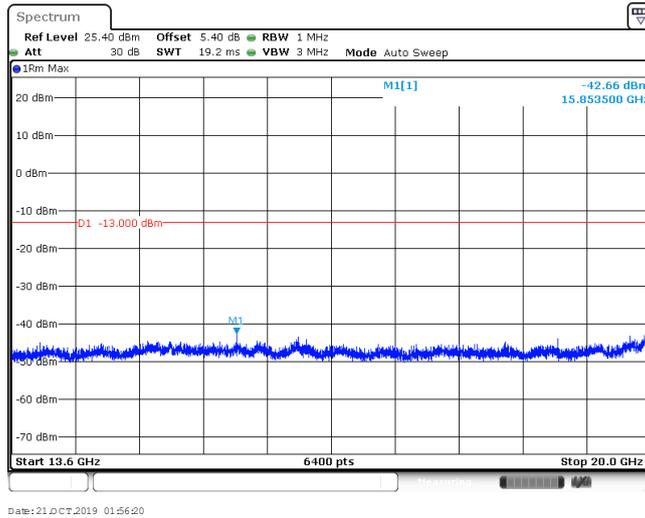


Band II_9538

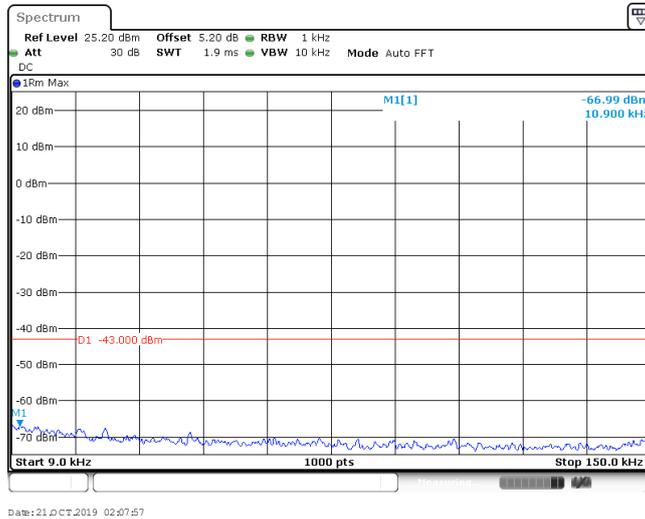


Band IV_1312

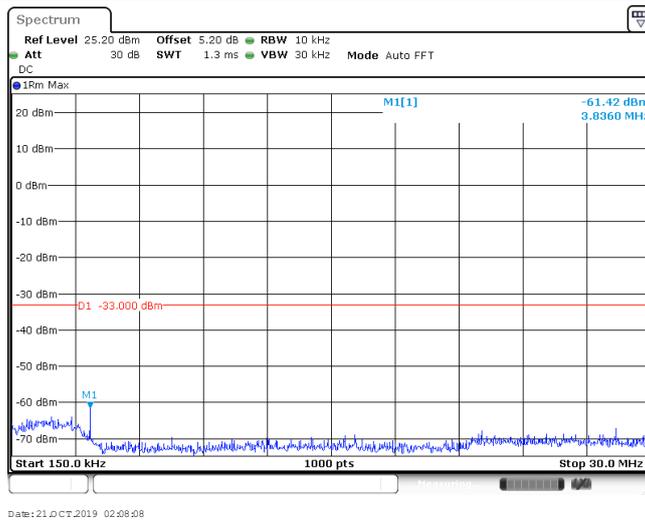


Band IV_1312

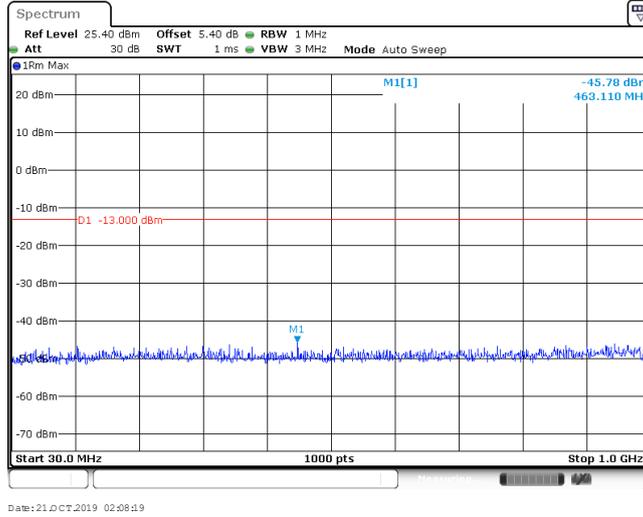


Band IV_1312

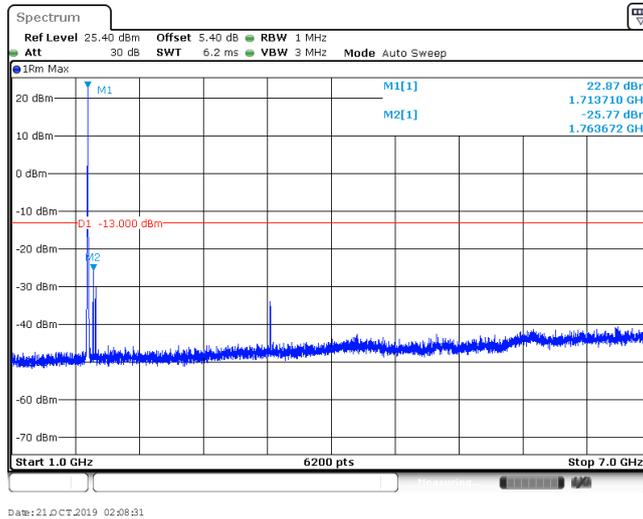


Band IV_1312

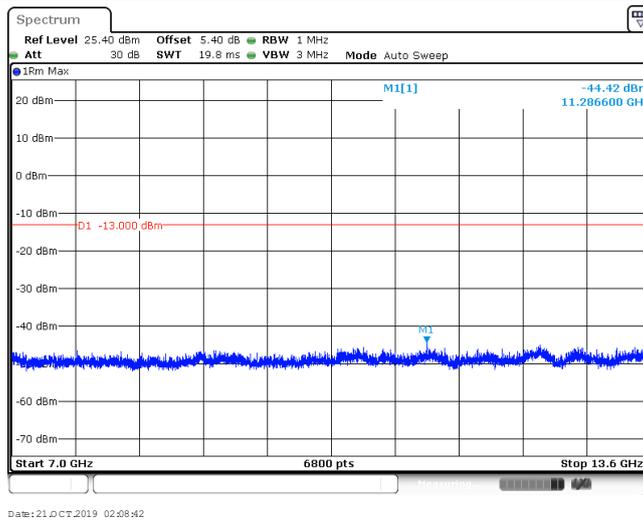


Band IV_1312

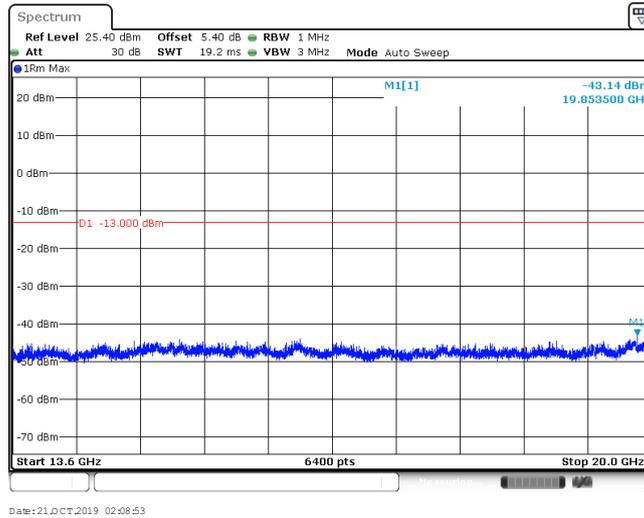


Band IV_1312

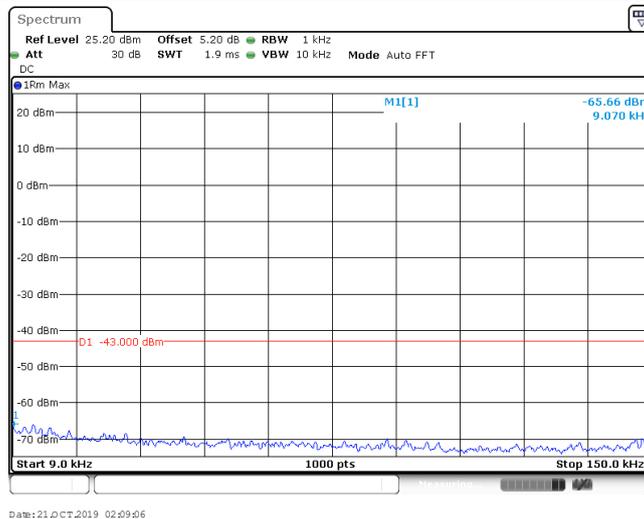


Band IV_1413

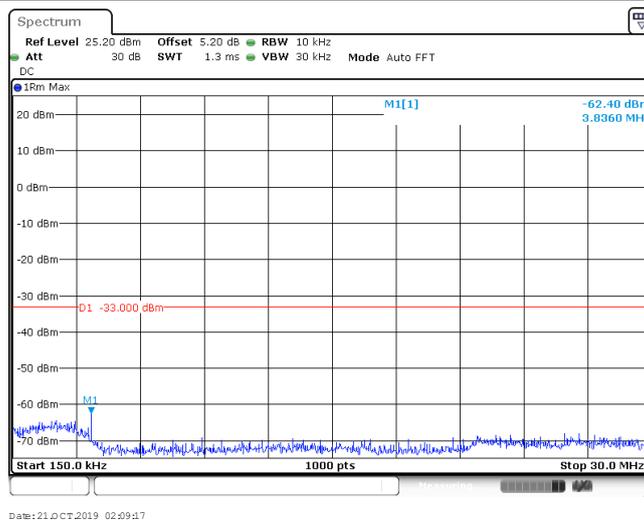


Band IV_1413

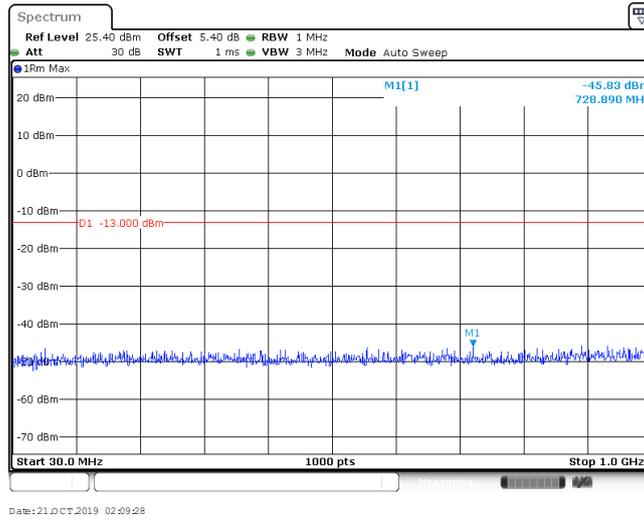


Band IV_1413

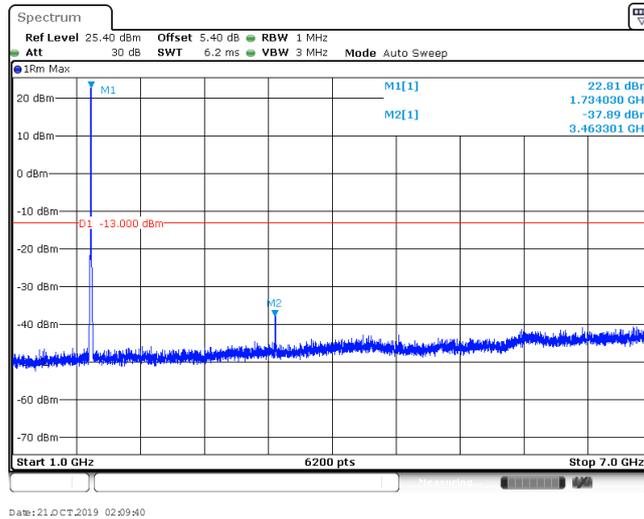


Band IV_1413

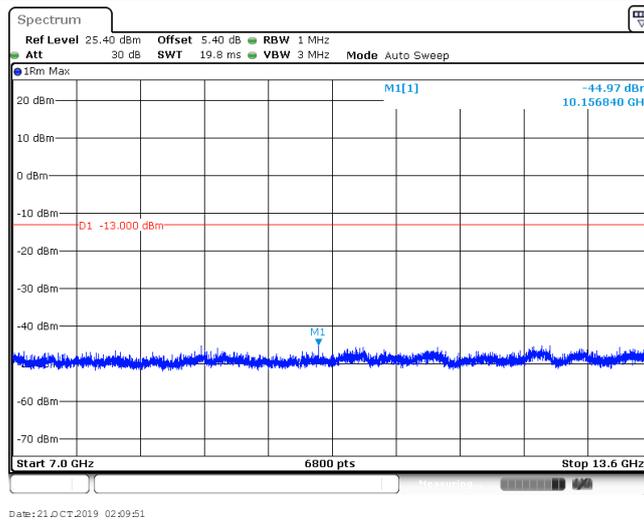


Band IV_1413

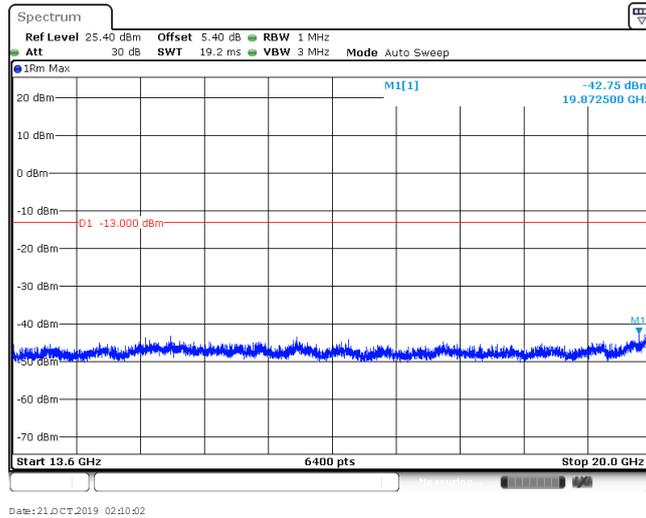


Band IV_1413

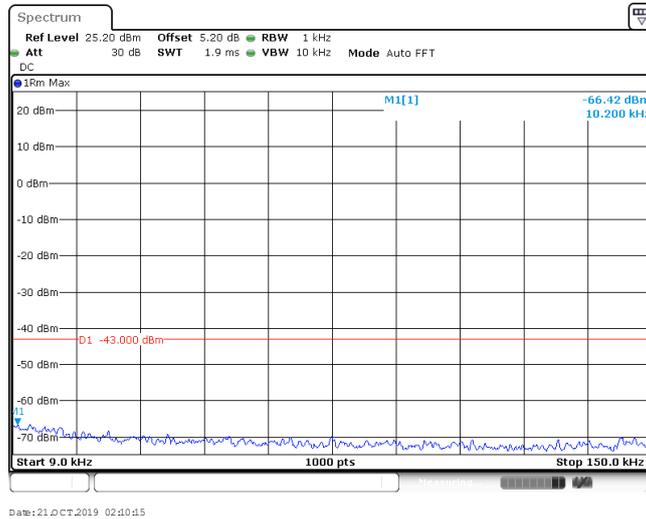


Band IV_1513

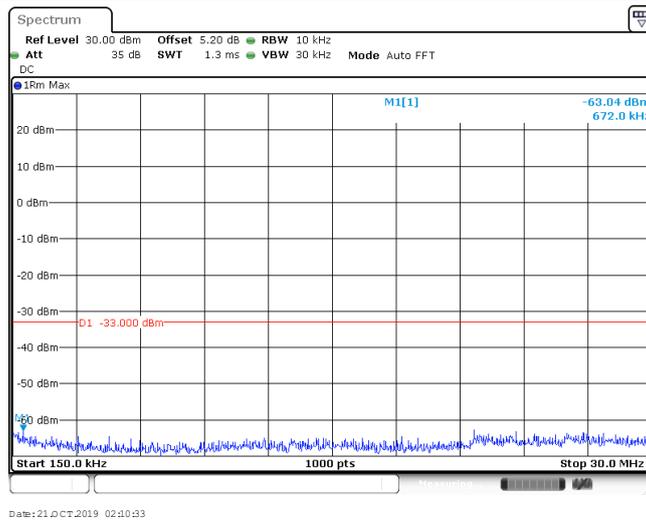


Band IV_1513

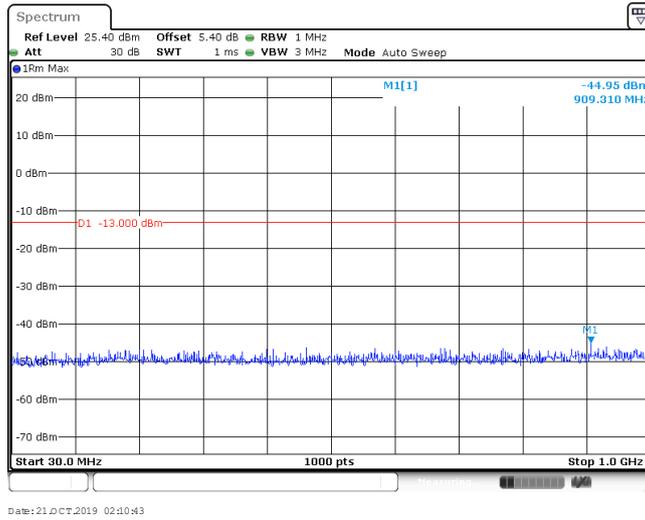


Band IV_1513

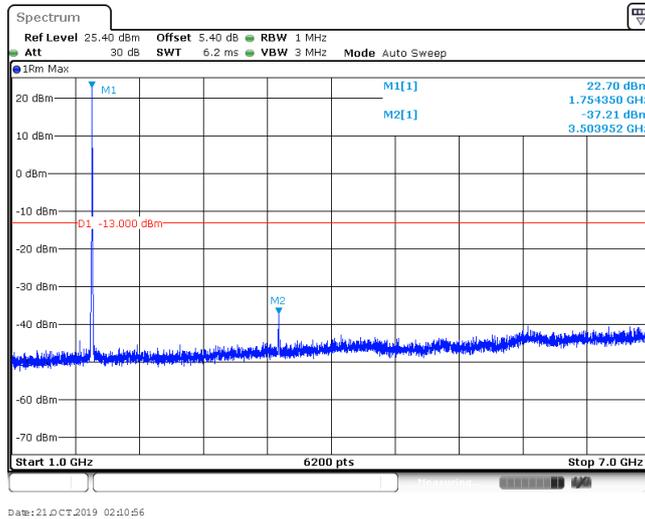


Band IV_1513

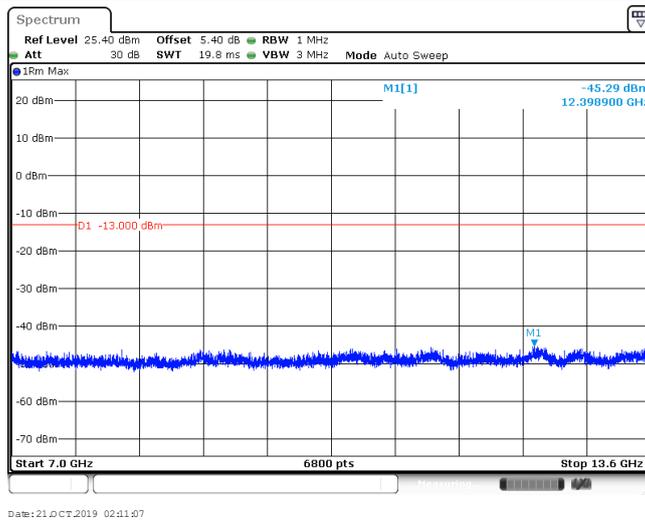


Band IV_1513

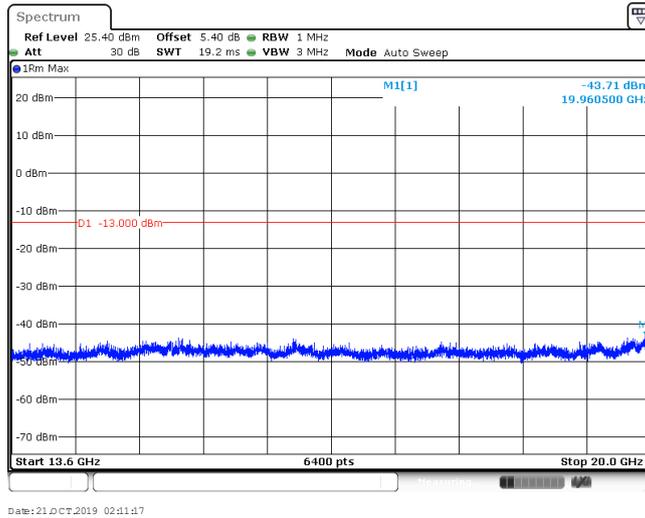


Band IV_1513

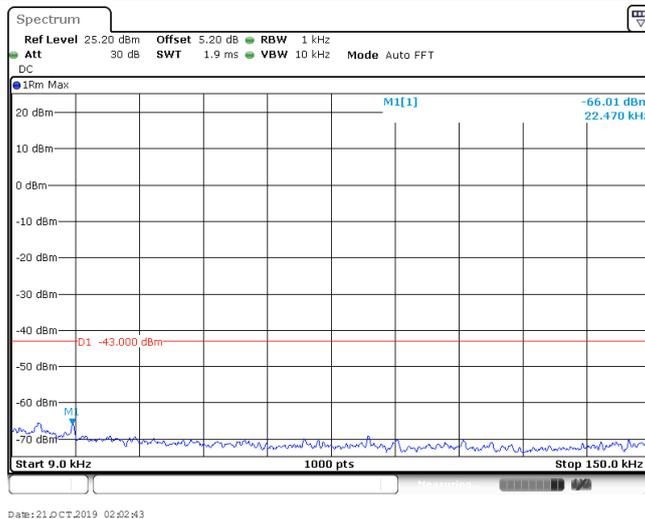


Band V_4132

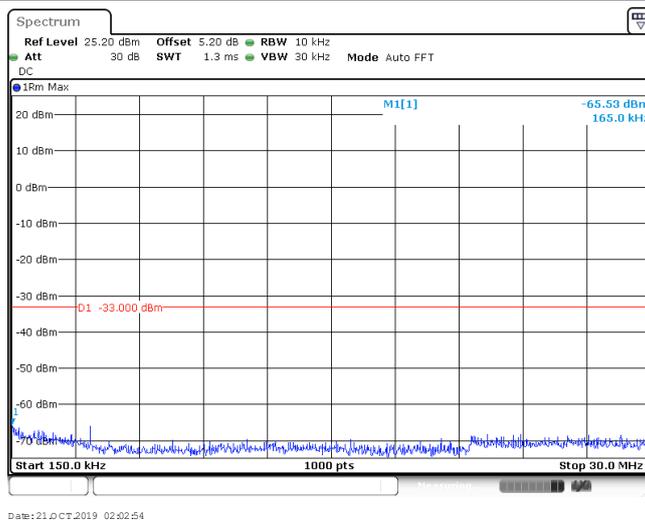


Band V_4132

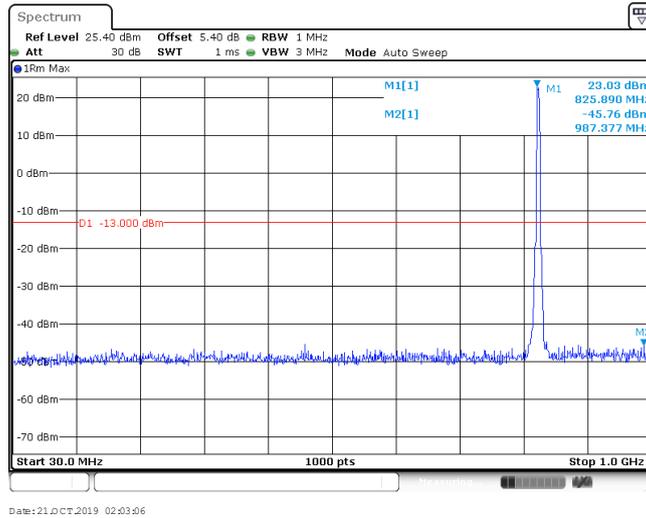


Band V_4132

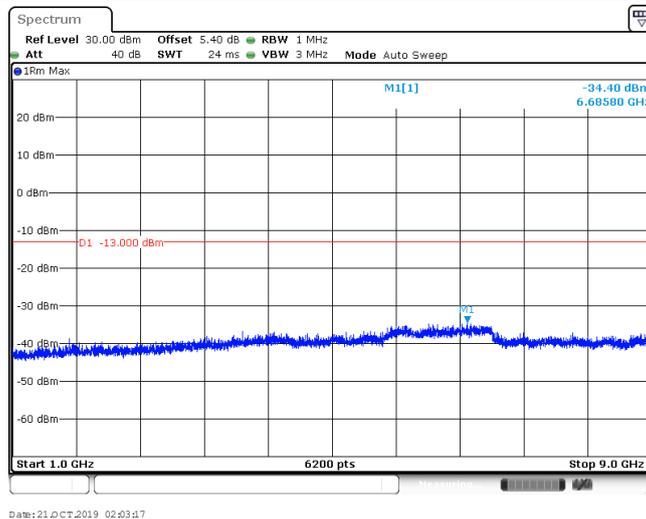

Band V_4132

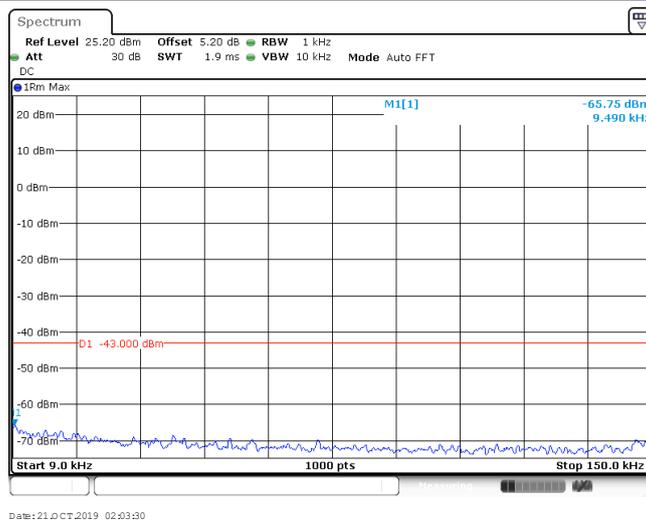


Band V_4182

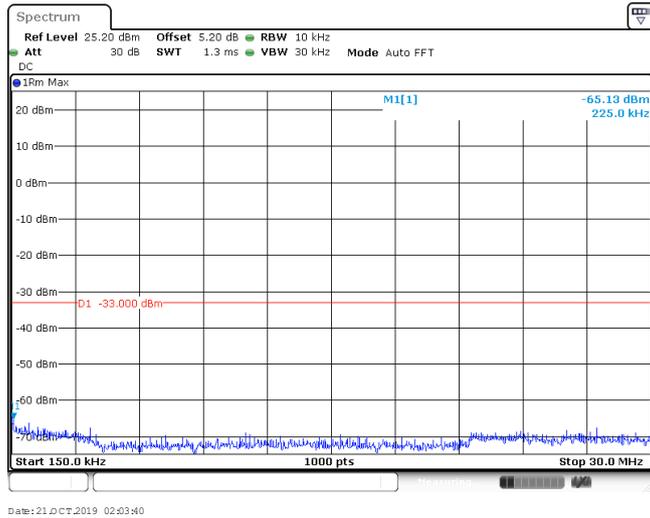


Date: 21 OCT 2019 02:03:40

Band V_4182

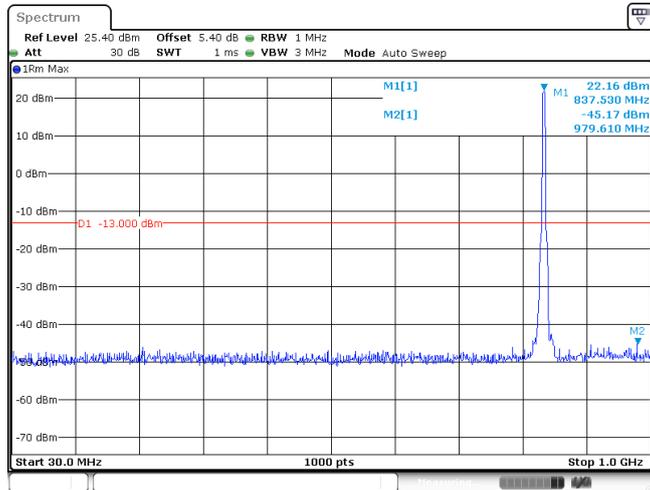


Date: 21 OCT 2019 02:03:52

Band V_4182

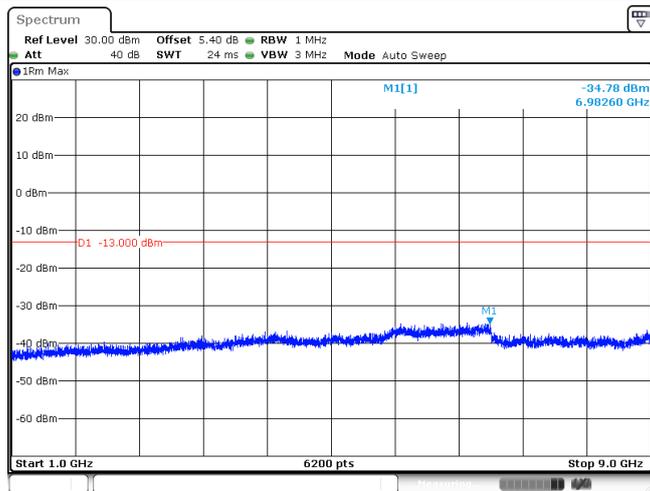


Date: 21 OCT 2019 02:04:03


Band V_4182

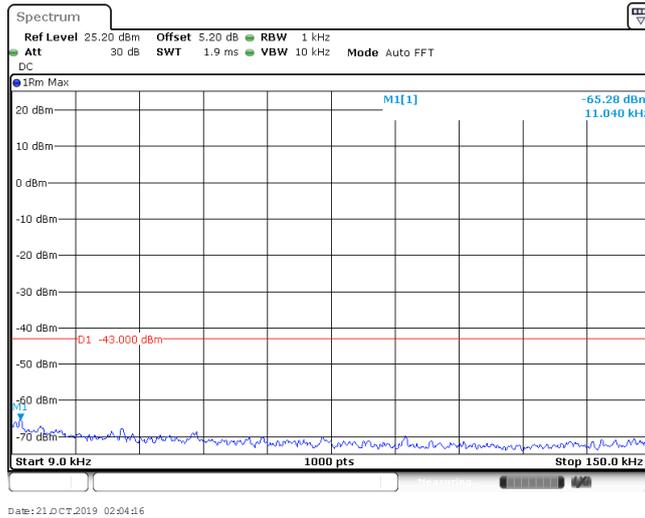


Band V_4233

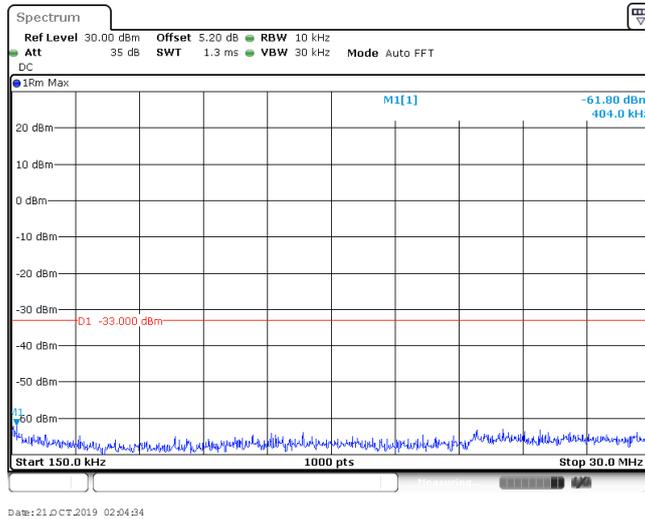

Band V_4233

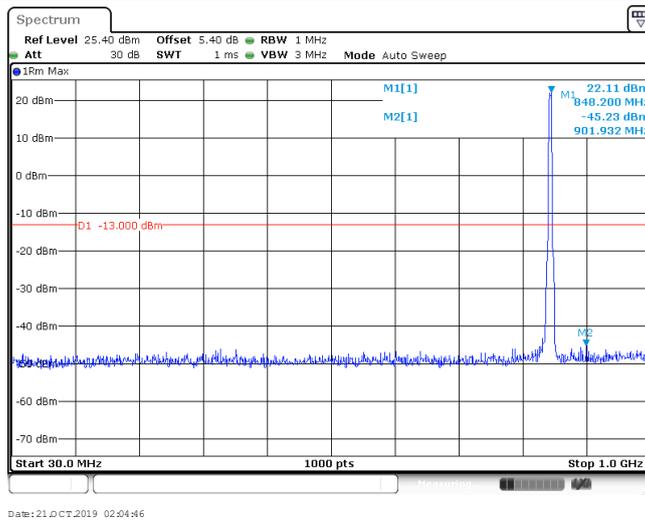

Band V_4233

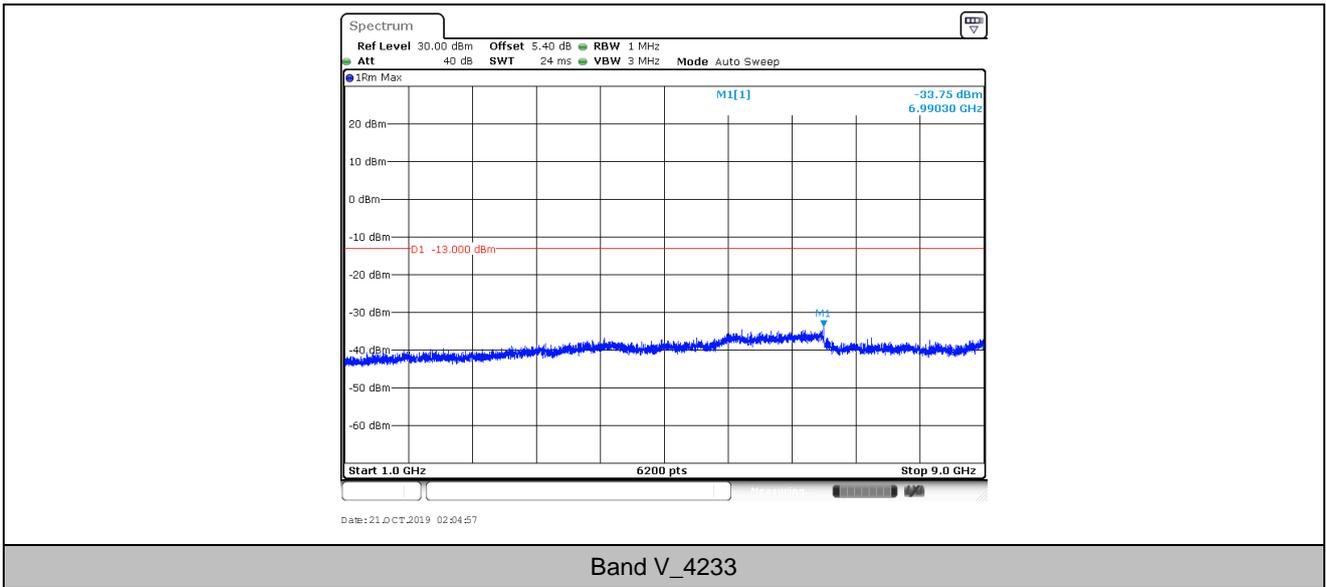

9. Frequency Stability

9.1. Frequency Vs Voltage

Band	Channel	Voltage (Vdc)	Temperature (°C)	Deviation (Hz)	Deviation (ppm)	Limit (ppm)	Verdict
Band II	9262	VL	TN	-3.08	-0.001664	±2.5	PASS
Band II	9262	VN	TN	-10.35	-0.005587	±2.5	PASS
Band II	9262	VH	TN	-10.01	-0.005402	±2.5	PASS
Band II	9400	VL	TN	-14.33	-0.007621	±2.5	PASS
Band II	9400	VN	TN	-6.94	-0.003690	±2.5	PASS
Band II	9400	VH	TN	-7.43	-0.003953	±2.5	PASS
Band II	9538	VL	TN	-11.23	-0.005887	±2.5	PASS
Band II	9538	VN	TN	-10.34	-0.005418	±2.5	PASS
Band II	9538	VH	TN	-12.63	-0.006622	±2.5	PASS
Band IV	1312	VL	TN	-12.64	-0.007381	±2.5	PASS
Band IV	1312	VN	TN	-19.97	-0.011662	±2.5	PASS
Band IV	1312	VH	TN	-15.76	-0.009202	±2.5	PASS
Band IV	1413	VL	TN	-11.94	-0.006890	±2.5	PASS
Band IV	1413	VN	TN	-7.96	-0.004595	±2.5	PASS
Band IV	1413	VH	TN	-8.86	-0.005115	±2.5	PASS
Band IV	1513	VL	TN	-5.06	-0.002889	±2.5	PASS
Band IV	1513	VN	TN	-7.67	-0.004379	±2.5	PASS
Band IV	1513	VH	TN	-7.42	-0.004236	±2.5	PASS
Band V	4132	VL	TN	-9.58	-0.011589	±2.5	PASS
Band V	4132	VN	TN	-7.74	-0.009365	±2.5	PASS
Band V	4132	VH	TN	-4.67	-0.005652	±2.5	PASS
Band V	4182	VL	TN	-7.11	-0.008500	±2.5	PASS
Band V	4182	VN	TN	-12.11	-0.014478	±2.5	PASS
Band V	4182	VH	TN	-10.14	-0.012126	±2.5	PASS
Band V	4233	VL	TN	-3.71	-0.004376	±2.5	PASS
Band V	4233	VN	TN	-3.85	-0.004545	±2.5	PASS
Band V	4233	VH	TN	-3.26	-0.003853	±2.5	PASS

9.2. Frequency Vs Temperature

Band	Channel	Voltage (Vdc)	Temperature (°C)	Deviation (Hz)	Deviation (ppm)	Limit (ppm)	Verdict
Band II	9262	VN	-30	-8.03	-0.004332	±2.5	PASS
Band II	9262	VN	-20	-10.44	-0.005637	±2.5	PASS
Band II	9262	VN	-10	-5.97	-0.003224	±2.5	PASS
Band II	9262	VN	0	-5.97	-0.003220	±2.5	PASS
Band II	9262	VN	10	-10.89	-0.005881	±2.5	PASS
Band II	9262	VN	20	-11.91	-0.006429	±2.5	PASS
Band II	9262	VN	30	-11.57	-0.006247	±2.5	PASS
Band II	9262	VN	40	-7.92	-0.004274	±2.5	PASS
Band II	9262	VN	50	-14.22	-0.007676	±2.5	PASS
Band II	9400	VN	-30	-4.98	-0.002648	±2.5	PASS
Band II	9400	VN	-20	-9.18	-0.004885	±2.5	PASS
Band II	9400	VN	-10	-5.63	-0.002994	±2.5	PASS
Band II	9400	VN	0	-9.30	-0.004946	±2.5	PASS
Band II	9400	VN	10	-7.00	-0.003721	±2.5	PASS
Band II	9400	VN	20	-10.74	-0.005714	±2.5	PASS
Band II	9400	VN	30	-11.05	-0.005878	±2.5	PASS
Band II	9400	VN	40	-9.73	-0.005174	±2.5	PASS
Band II	9400	VN	50	-14.93	-0.007940	±2.5	PASS
Band II	9538	VN	-30	-11.29	-0.005920	±2.5	PASS
Band II	9538	VN	-20	-10.88	-0.005703	±2.5	PASS
Band II	9538	VN	-10	-14.94	-0.007833	±2.5	PASS
Band II	9538	VN	0	-15.01	-0.007866	±2.5	PASS
Band II	9538	VN	10	-13.92	-0.007297	±2.5	PASS
Band II	9538	VN	20	-12.80	-0.006712	±2.5	PASS
Band II	9538	VN	30	-9.08	-0.004758	±2.5	PASS
Band II	9538	VN	40	-7.81	-0.004094	±2.5	PASS
Band II	9538	VN	50	-9.54	-0.005002	±2.5	PASS
Band IV	1312	VN	-30	-15.88	-0.009273	±2.5	PASS
Band IV	1312	VN	-20	-12.54	-0.007322	±2.5	PASS
Band IV	1312	VN	-10	-11.65	-0.006804	±2.5	PASS
Band IV	1312	VN	0	-12.48	-0.007289	±2.5	PASS
Band IV	1312	VN	10	-7.21	-0.004210	±2.5	PASS
Band IV	1312	VN	20	-13.86	-0.008095	±2.5	PASS
Band IV	1312	VN	30	-8.33	-0.004866	±2.5	PASS
Band IV	1312	VN	40	-9.85	-0.005752	±2.5	PASS
Band IV	1312	VN	50	-8.40	-0.004908	±2.5	PASS
Band IV	1413	VN	-30	-11.48	-0.006626	±2.5	PASS
Band IV	1413	VN	-20	-10.16	-0.005862	±2.5	PASS
Band IV	1413	VN	-10	-8.23	-0.004747	±2.5	PASS
Band IV	1413	VN	0	-6.04	-0.003488	±2.5	PASS
Band IV	1413	VN	10	-12.40	-0.007158	±2.5	PASS
Band IV	1413	VN	20	-12.37	-0.007142	±2.5	PASS
Band IV	1413	VN	30	-7.81	-0.004508	±2.5	PASS
Band IV	1413	VN	40	-8.37	-0.004830	±2.5	PASS
Band IV	1413	VN	50	-8.18	-0.004723	±2.5	PASS
Band IV	1513	VN	-30	-5.59	-0.003187	±2.5	PASS
Band IV	1513	VN	-20	-10.24	-0.005844	±2.5	PASS
Band IV	1513	VN	-10	-15.11	-0.008623	±2.5	PASS

JianYan Testing Group Shenzhen Co., Ltd.

Report No: JYTSZB-R12-2102953

Band IV	1513	VN	0	-10.69	-0.006101	±2.5	PASS
Band IV	1513	VN	10	-8.80	-0.005020	±2.5	PASS
Band IV	1513	VN	20	-10.82	-0.006175	±2.5	PASS
Band IV	1513	VN	30	-8.25	-0.004706	±2.5	PASS
Band IV	1513	VN	40	-8.82	-0.005032	±2.5	PASS
Band IV	1513	VN	50	-9.09	-0.005187	±2.5	PASS
Band V	4132	VN	-30	-3.21	-0.003886	±2.5	PASS
Band V	4132	VN	-20	-5.52	-0.006682	±2.5	PASS
Band V	4132	VN	-10	-5.87	-0.007097	±2.5	PASS
Band V	4132	VN	0	-6.69	-0.008092	±2.5	PASS
Band V	4132	VN	10	-6.16	-0.007452	±2.5	PASS
Band V	4132	VN	20	-7.22	-0.008733	±2.5	PASS
Band V	4132	VN	30	-6.08	-0.007357	±2.5	PASS
Band V	4132	VN	40	-6.44	-0.007790	±2.5	PASS
Band V	4132	VN	50	-7.87	-0.009521	±2.5	PASS
Band V	4182	VN	-30	-6.04	-0.007218	±2.5	PASS
Band V	4182	VN	-20	-8.55	-0.010228	±2.5	PASS
Band V	4182	VN	-10	-2.27	-0.002719	±2.5	PASS
Band V	4182	VN	0	-4.54	-0.005430	±2.5	PASS
Band V	4182	VN	10	-3.99	-0.004772	±2.5	PASS
Band V	4182	VN	20	-5.49	-0.006568	±2.5	PASS
Band V	4182	VN	30	-2.93	-0.003498	±2.5	PASS
Band V	4182	VN	40	-5.32	-0.006362	±2.5	PASS
Band V	4182	VN	50	-2.80	-0.003352	±2.5	PASS
Band V	4233	VN	-30	-9.18	-0.010840	±2.5	PASS
Band V	4233	VN	-20	-7.95	-0.009395	±2.5	PASS
Band V	4233	VN	-10	-13.92	-0.016441	±2.5	PASS
Band V	4233	VN	0	-11.98	-0.014151	±2.5	PASS
Band V	4233	VN	10	-7.43	-0.008778	±2.5	PASS
Band V	4233	VN	20	-6.62	-0.007815	±2.5	PASS
Band V	4233	VN	30	-3.65	-0.004317	±2.5	PASS
Band V	4233	VN	40	-11.19	-0.013222	±2.5	PASS
Band V	4233	VN	50	-8.40	-0.009927	±2.5	PASS

The End