


Test_Mode	Wio-LR1121	Test_Frequency	903Mhz
Remark	Fiberglass Antenna		


Test Graph

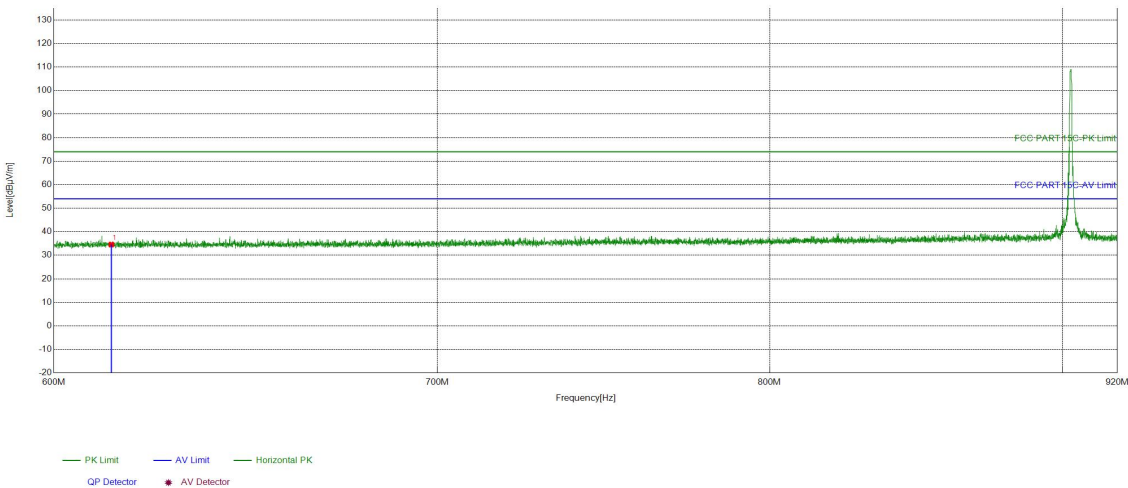

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
1	614	-8.49	43.06	34.57	74.00	39.43	PASS	Horizontal	PK

Test_Mode	Wio-LR1121	Test_Frequency	903Mhz
Remark	Fiberglass Antenna		


Test Graph

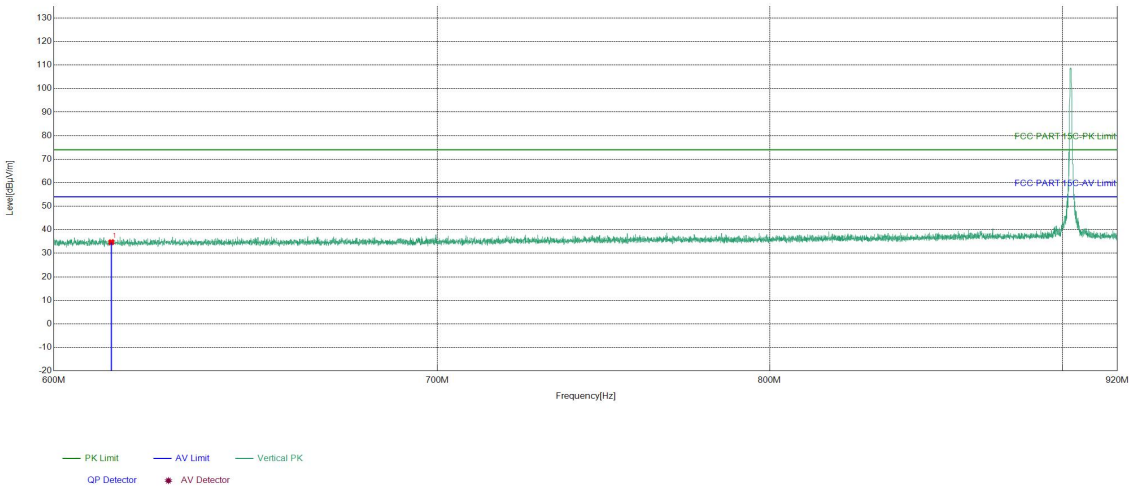

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
1	614	-8.49	43.21	34.72	74.00	39.28	PASS	Vertical	PK

Test_Mode	Wio-LR1121	Test_Frequency	909.4Mhz
Remark	Fiberglass Antenna		


Test Graph

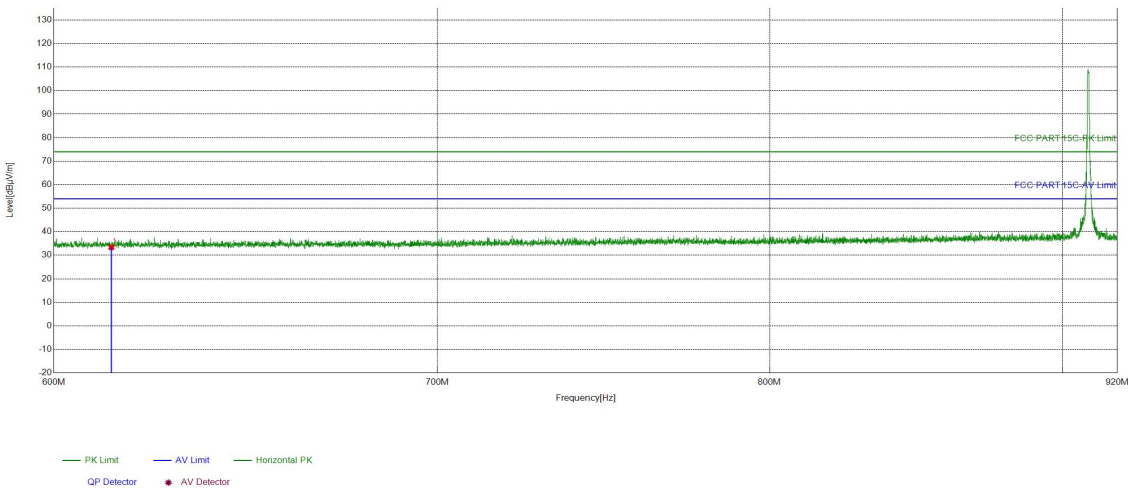

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
1	614	-8.49	41.88	33.39	74.00	40.61	PASS	Horizontal	PK

Test_Mode	Wio-LR1121	Test_Frequency	909.4Mhz
Remark	Fiberglass Antenna		


Test Graph

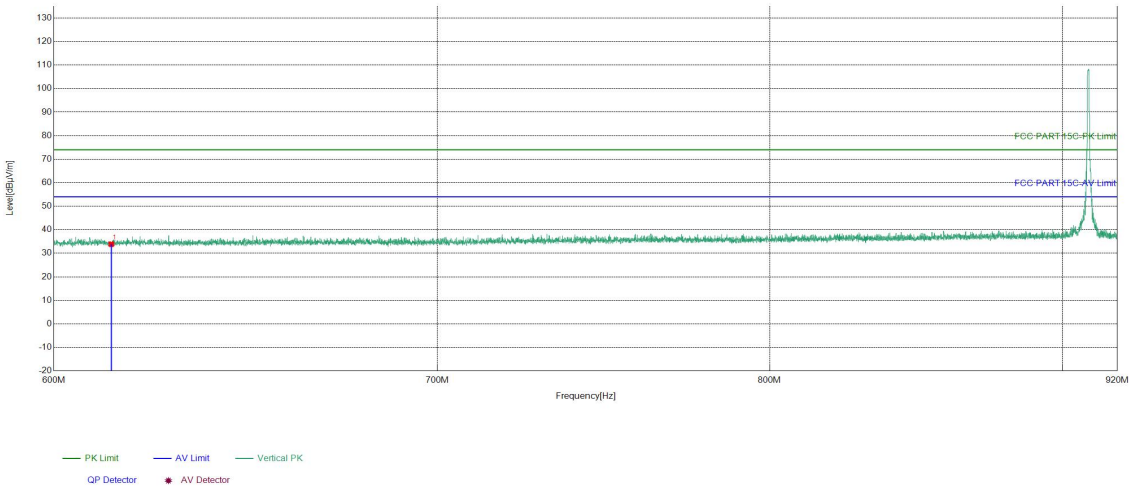

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
1	614	-8.49	42.36	33.87	74.00	40.13	PASS	Vertical	PK

Test_Mode	Wio-LR1121	Test_Frequency	914.2Mhz
Remark	Fiberglass Antenna		


Test Graph

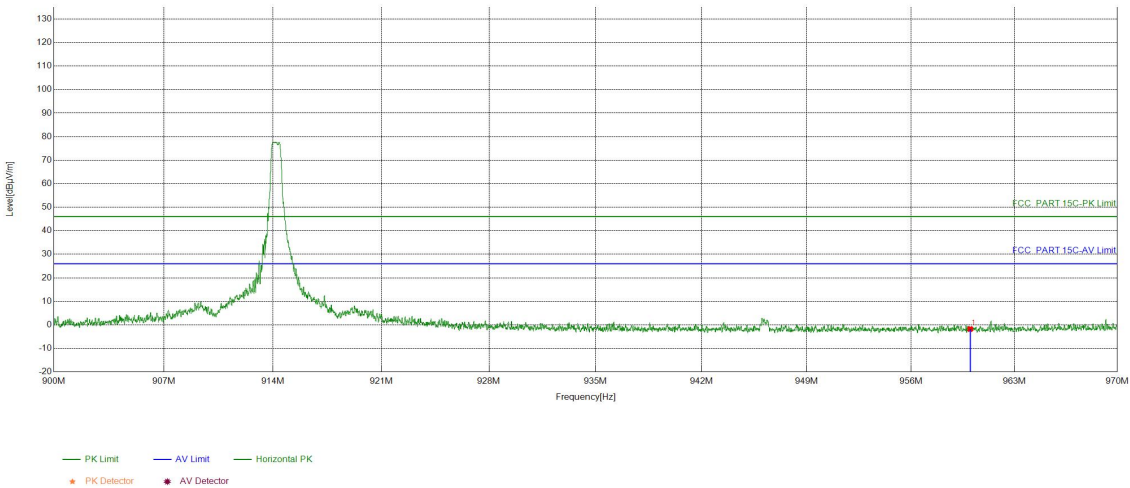

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
1	960	-35.46	33.69	-1.77	46.00	47.77	PASS	Horizontal	PK

Test_Mode	Wio-LR1121	Test_Frequency	914.2Mhz
Remark	Fiberglass Antenna		


Test Graph

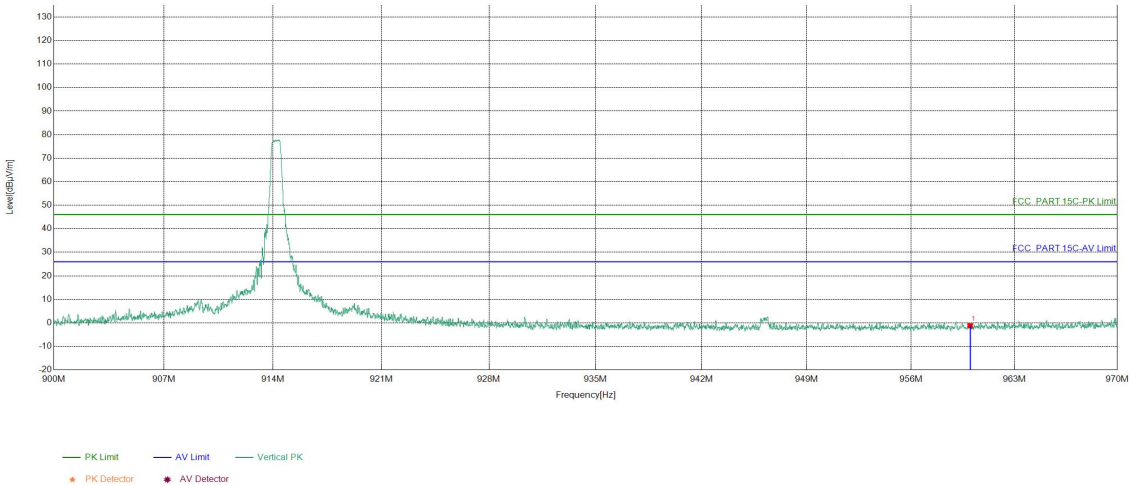

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
1	960	-35.46	34.29	-1.17	46.00	47.17	PASS	Vertical	PK

Test_Mode	Wio-LR1121-N	Test_Frequency	903Mhz
Remark	Fiberglass Antenna		


Test Graph

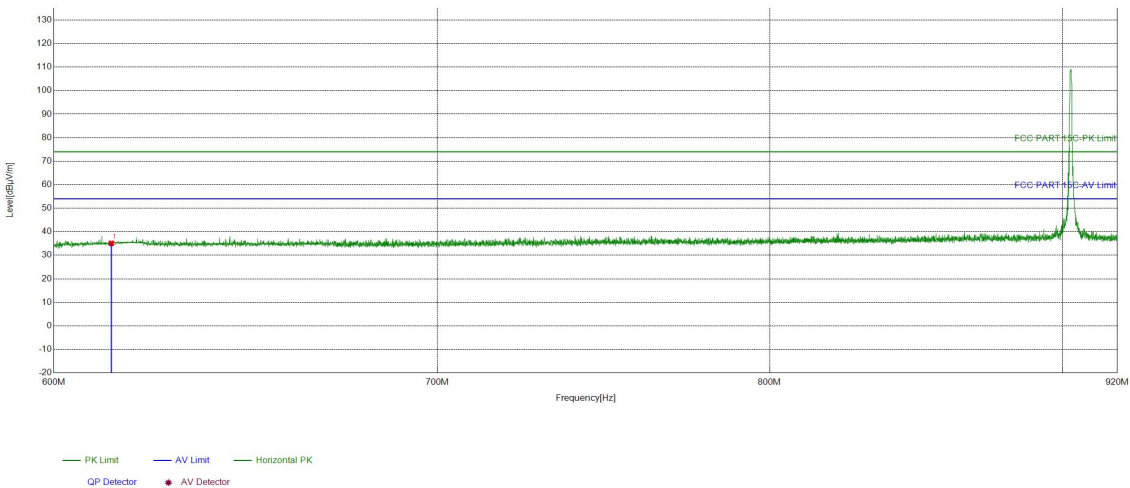

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
1	614	-8.49	43.56	35.07	74.00	38.93	PASS	Horizontal	PK

Test_Mode	Wio-LR1121-N	Test_Frequency	903Mhz
Remark	Fiberglass Antenna		


Test Graph

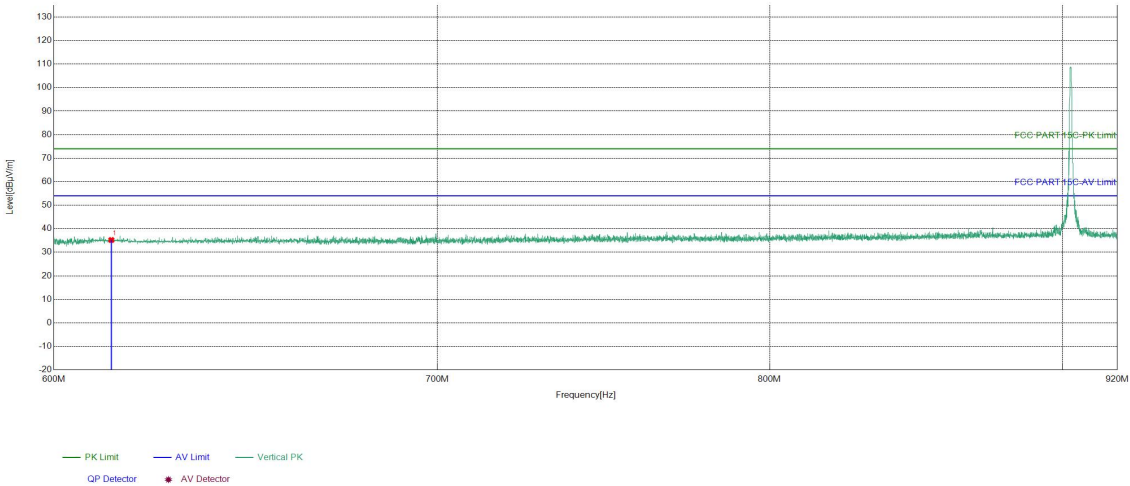

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
1	614	-8.49	43.71	35.22	74.00	38.78	PASS	Vertical	PK

Test_Mode	Wio-LR1121-N	Test_Frequency	909.4Mhz
Remark	Fiberglass Antenna		


Test Graph

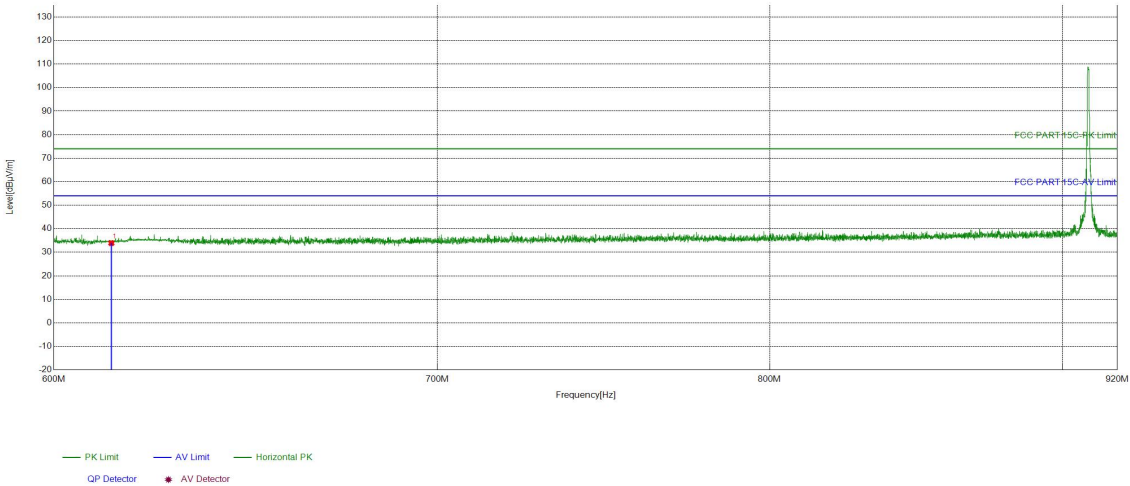

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
1	614	-8.49	42.38	33.89	74.00	40.11	PASS	Horizontal	PK

Test_Mode	Wio-LR1121-N	Test_Frequency	909.4Mhz
Remark	Fiberglass Antenna		


Test Graph

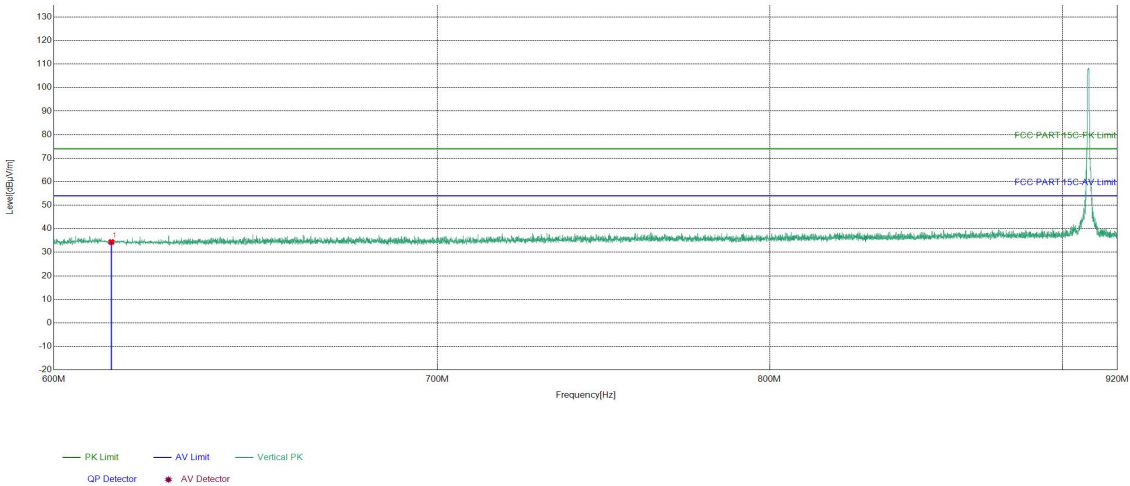

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
1	614	-8.49	42.86	34.37	74.00	39.63	PASS	Vertical	PK

Test_Mode	Wio-LR1121-N	Test_Frequency	914.2Mhz
Remark	Fiberglass Antenna		


Test Graph

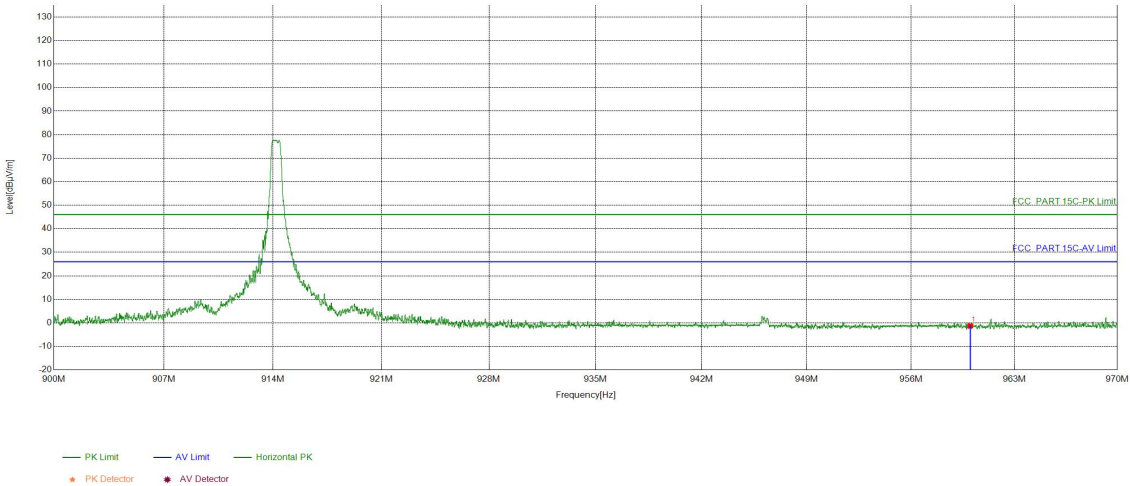

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
1	960	-35.46	34.19	-1.27	46.00	47.27	PASS	Horizontal	PK

Test_Mode	Wio-LR1121-N	Test_Frequency	914.2Mhz
Remark	Fiberglass Antenna		


Test Graph

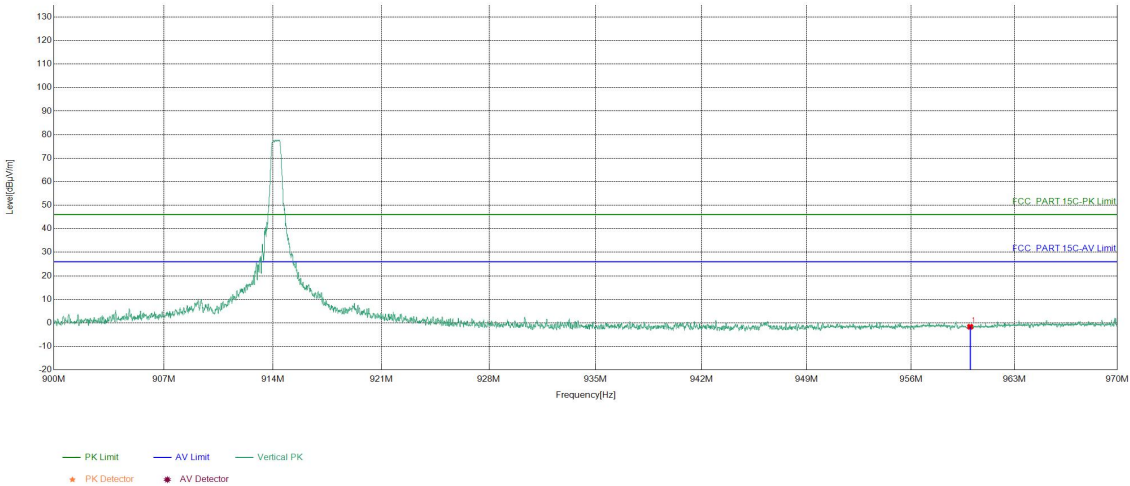

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
1	960	-35.46	33.79	-1.67	46.00	47.67	PASS	Vertical	PK

Test_Mode	Wio-LR1121-N	Test_Frequency	903 Mhz
Remark	FPC Antenna		


Test Graph

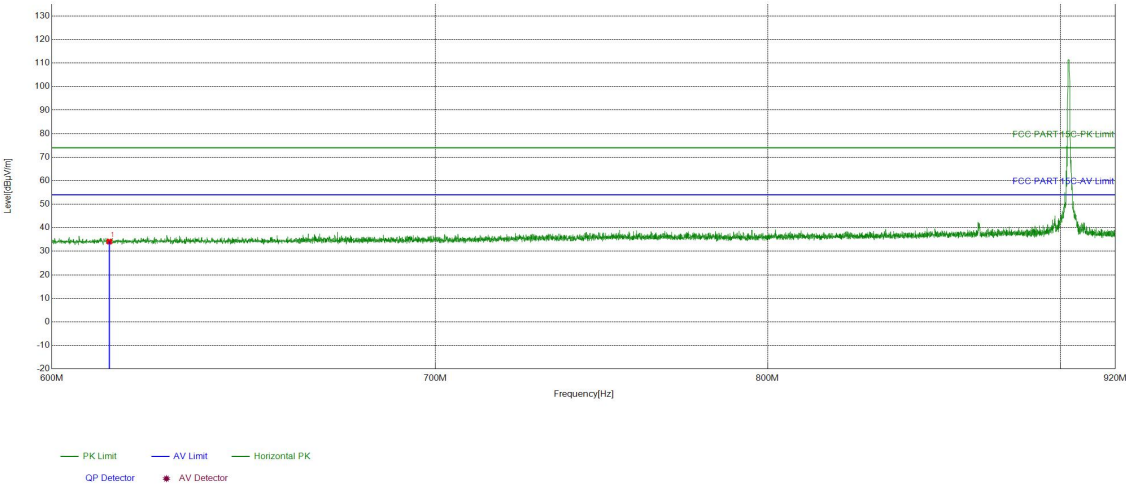

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
1	614	-8.49	42.61	34.12	74.00	39.88	PASS	Horizontal	PK

Test_Mode	Wio-LR1121-N	Test_Frequency	903 Mhz
Remark	FPC Antenna		


Test Graph

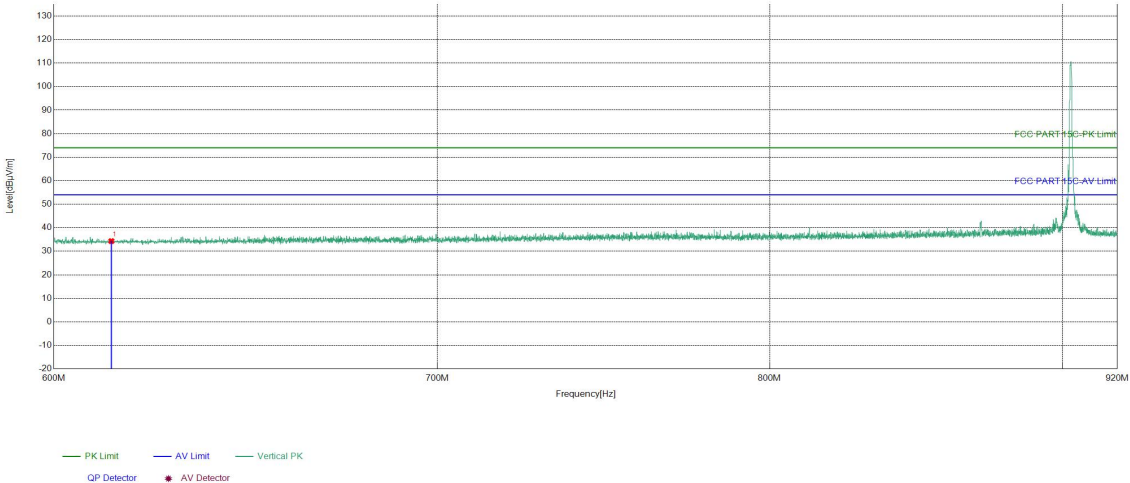

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	614	-8.49	42.81	34.32	74.00	39.68	PASS	Vertical	PK

Test_Mode	Wio-LR1121-N	Test_Frequency	909.4 Mhz
Remark	FPC Antenna		


Test Graph

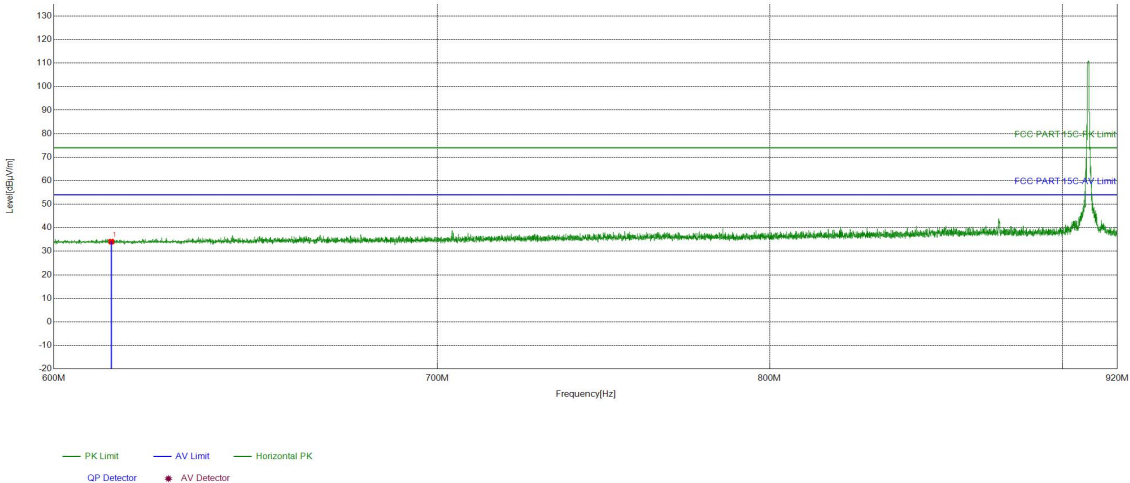

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
1	614	-8.49	42.58	34.09	74.00	39.91	PASS	Horizontal	PK

Test_Mode	Wio-LR1121-N	Test_Frequency	909.4 Mhz
Remark	FPC Antenna		


Test Graph

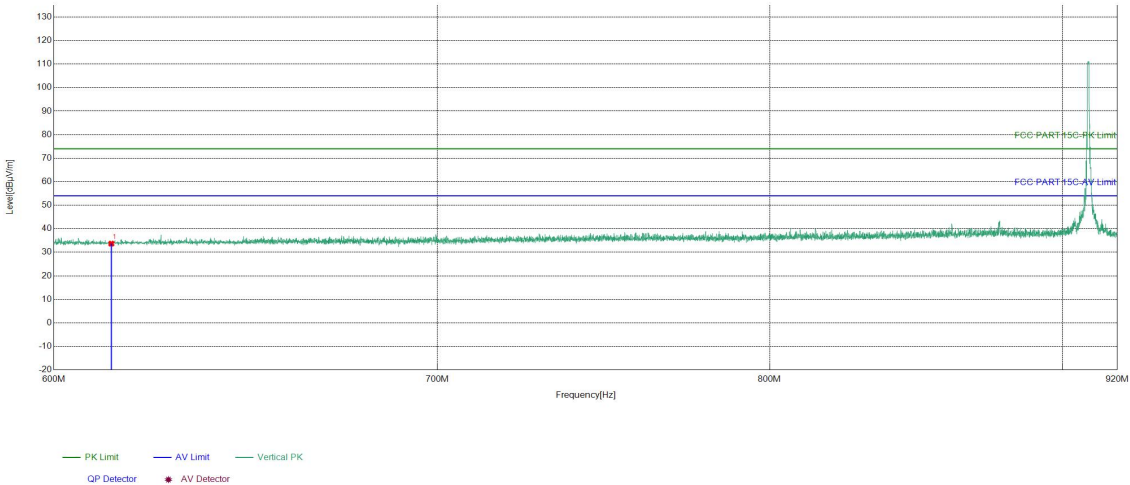

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
1	614	-8.49	42.17	33.68	74.00	40.32	PASS	Vertical	PK

Test_Mode	Wio-LR1121-N	Test_Frequency	914.2 Mhz
Remark	FPC Antenna		


Test Graph

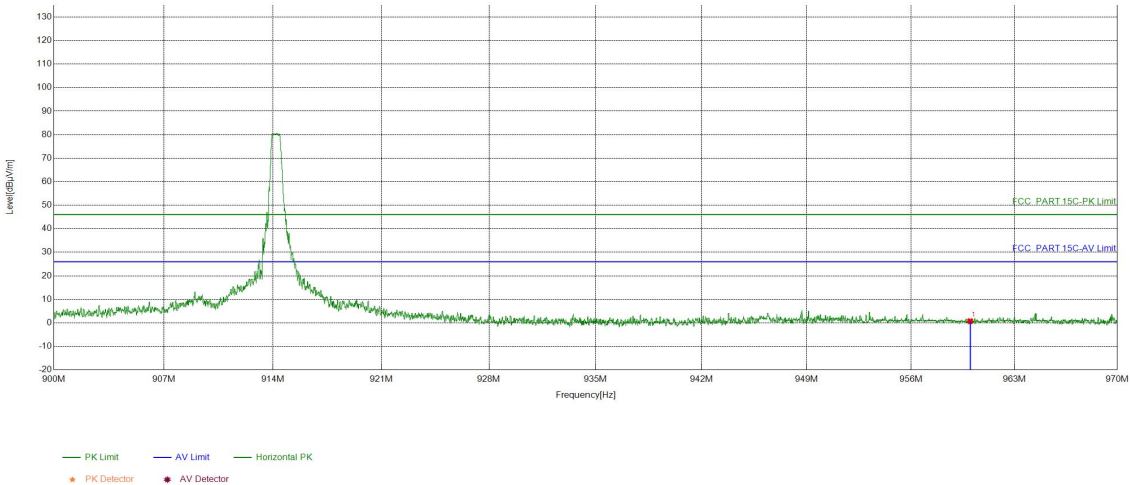

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	960	-35.46	36.18	0.72	46.00	45.28	PASS	Horizontal	PK

Test_Mode	Wio-LR1121-N	Test_Frequency	914.2 Mhz
Remark	FPC Antenna		

Test Graph

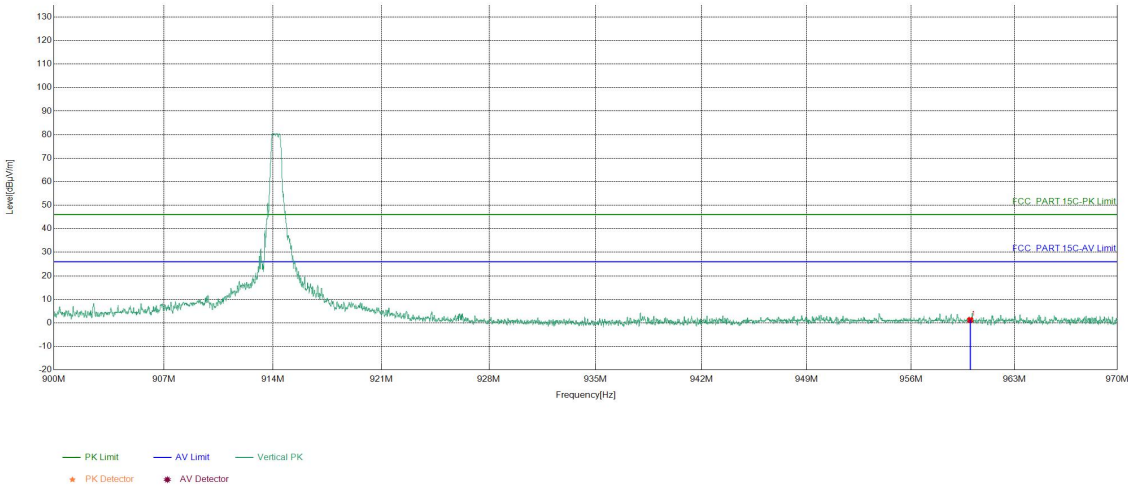

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	960	-35.46	36.67	1.21	46.00	44.79	PASS	Vertical	PK

Radiated Spurious Emission above 1GHz:

Remark			(Wio-LR1121) FPC Antenna						
Mode:			Transmitting			Channel:		903 MHz	
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1232.9489	-22.33	64.45	42.12	74.00	31.88	PASS	Horizontal	PK
2	1805.6537	-20.11	68.37	48.26	74.00	25.74	PASS	Horizontal	PK
3	2709.1806	-16.53	60.14	43.61	74.00	30.39	PASS	Horizontal	PK
4	3611.0407	-13.17	53.34	40.17	74.00	33.83	PASS	Horizontal	PK
5	5418.1612	-6.61	49.46	42.85	74.00	31.15	PASS	Horizontal	PK
6	7744.6663	-1.46	47.39	45.93	74.00	28.07	PASS	Horizontal	PK
7	1596.1731	-21.00	67.89	46.89	74.00	27.11	PASS	Vertical	PK
8	1805.5204	-20.11	65.42	45.31	74.00	28.69	PASS	Vertical	PK
9	2391.2928	-17.90	63.45	45.55	74.00	28.45	PASS	Vertical	PK
10	3187.2125	-14.50	59.05	44.55	74.00	29.45	PASS	Vertical	PK
11	4794.1196	-8.62	51.30	42.68	74.00	31.32	PASS	Vertical	PK
12	6407.5272	-4.35	50.50	46.15	74.00	27.85	PASS	Vertical	PK

Remark			(Wio-LR1121) FPC Antenna						
Mode:			Transmitting			Channel:		909.4 MHz	
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1363.8909	-21.92	63.65	41.73	74.00	32.27	PASS	Horizontal	PK
2	1819.1213	-20.09	70.89	50.80	74.00	23.20	PASS	Horizontal	PK
3	2727.9819	-16.44	61.22	44.78	74.00	29.22	PASS	Horizontal	PK
4	3637.6925	-12.96	56.51	43.55	74.00	30.45	PASS	Horizontal	PK
5	5456.5138	-6.44	52.04	45.60	74.00	28.40	PASS	Horizontal	PK
6	9673.9949	1.23	45.14	46.37	74.00	27.63	PASS	Horizontal	PK
7	1438.5626	-21.63	67.60	45.97	74.00	28.03	PASS	Vertical	PK
8	1767.1178	-20.36	64.86	44.50	74.00	29.50	PASS	Vertical	PK
9	2508.5006	-17.14	61.19	44.05	74.00	29.95	PASS	Vertical	PK
10	3189.1626	-14.49	60.52	46.03	74.00	27.97	PASS	Vertical	PK
11	5455.8637	-6.44	52.01	45.57	74.00	28.43	PASS	Vertical	PK
12	6409.4773	-4.35	51.35	47.00	74.00	27.00	PASS	Vertical	PK

Remark		(Wio-LR1121) FPC Antenna							
Mode:		Transmitting				Channel:		914.2 MHz	
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1828.8553	-20.07	70.46	50.39	74.00	23.61	PASS	Horizontal	PK
2	2741.9828	-16.37	64.31	47.94	74.00	26.06	PASS	Horizontal	PK
3	3656.5438	-12.85	57.50	44.65	74.00	29.35	PASS	Horizontal	PK
4	5485.7657	-6.49	51.61	45.12	74.00	28.88	PASS	Horizontal	PK
5	7976.0817	-1.38	47.79	46.41	74.00	27.59	PASS	Horizontal	PK
6	11789.886	2.37	46.86	49.23	74.00	24.77	PASS	Horizontal	PK
7	1487.2325	-21.51	65.62	44.11	74.00	29.89	PASS	Vertical	PK
8	1828.4552	-20.07	62.53	42.46	74.00	31.54	PASS	Vertical	PK
9	2790.2527	-16.22	61.21	44.99	74.00	29.01	PASS	Vertical	PK
10	3197.6132	-14.46	58.52	44.06	74.00	29.94	PASS	Vertical	PK
11	5485.1157	-6.49	51.78	45.29	74.00	28.71	PASS	Vertical	PK
12	7983.8823	-1.38	48.41	47.03	74.00	26.97	PASS	Vertical	PK

Remark		(Wio-LR1121-N) Spring Antenna							
Mode:		Transmitting				Channel:		903 MHz	
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1245.6164	-22.35	68.43	46.08	74.00	27.92	PASS	Horizontal	PK
2	1805.9204	-20.11	81.63	61.52	74.00	12.48	PASS	Horizontal	PK
3	2708.3806	-16.53	67.04	50.51	74.00	23.49	PASS	Horizontal	PK
4	3612.9909	-13.15	63.24	50.09	74.00	23.91	PASS	Horizontal	PK
5	7736.8658	-1.50	46.52	45.02	74.00	28.98	PASS	Horizontal	PK
6	11815.2377	2.42	44.85	47.27	74.00	26.73	PASS	Horizontal	PK
7	1079.872	-22.73	64.36	41.63	74.00	32.37	PASS	Vertical	PK
8	1805.9204	-20.11	79.39	59.28	74.00	14.72	PASS	Vertical	PK
9	2709.314	-16.53	65.71	49.18	74.00	24.82	PASS	Vertical	PK
10	3611.6908	-13.15	60.13	46.98	74.00	27.02	PASS	Vertical	PK
11	6410.1273	-4.35	47.59	43.24	74.00	30.76	PASS	Vertical	PK
12	7996.2331	-1.36	48.01	46.65	74.00	27.35	PASS	Vertical	PK

Remark			(Wio-LR1121-N) Spring Antenna						
Mode:			Transmitting			Channel:		909.4 MHz	
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1154.277	-22.77	64.78	42.01	74.00	31.99	PASS	Horizontal	PK
2	1818.5879	-20.09	77.01	56.92	74.00	17.08	PASS	Horizontal	PK
3	2727.7152	-16.44	62.42	45.98	74.00	28.02	PASS	Horizontal	PK
4	3637.6925	-12.96	58.96	46.00	74.00	28.00	PASS	Horizontal	PK
5	7966.3311	-1.38	48.76	47.38	74.00	26.62	PASS	Horizontal	PK
6	12320.3214	3.85	44.85	48.70	74.00	25.30	PASS	Horizontal	PK
7	1311.0874	-22.07	67.41	45.34	74.00	28.66	PASS	Vertical	PK
8	1818.8546	-20.09	74.70	54.61	74.00	19.39	PASS	Vertical	PK
9	2727.9819	-16.44	59.52	43.08	74.00	30.92	PASS	Vertical	PK
10	3636.3924	-12.97	59.98	47.01	74.00	26.99	PASS	Vertical	PK
11	7978.6819	-1.38	48.54	47.16	74.00	26.84	PASS	Vertical	PK
12	12495.8331	3.95	44.85	48.80	74.00	25.20	PASS	Vertical	PK

Remark			(Wio-LR1121-N) Spring Antenna						
Mode:			Transmitting			Channel:		914.2 MHz	
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1146.5431	-22.81	65.32	42.51	74.00	31.49	PASS	Horizontal	PK
2	1828.5886	-20.07	80.43	60.36	74.00	13.64	PASS	Horizontal	PK
3	2742.1161	-16.37	62.73	46.36	74.00	27.64	PASS	Horizontal	PK
4	4928.6786	-8.13	50.64	42.51	74.00	31.49	PASS	Horizontal	PK
5	7749.2166	-1.43	46.10	44.67	74.00	29.33	PASS	Horizontal	PK
6	12397.6765	3.88	44.79	48.67	74.00	25.33	PASS	Horizontal	PK
7	1036.0024	-22.35	66.61	44.26	74.00	29.74	PASS	Vertical	PK
8	1828.1885	-20.07	68.61	48.54	74.00	25.46	PASS	Vertical	PK
9	3194.363	-14.48	60.24	45.76	74.00	28.24	PASS	Vertical	PK
10	6369.8247	-4.36	51.76	47.40	74.00	26.60	PASS	Vertical	PK
11	10261.6341	1.96	43.87	45.83	74.00	28.17	PASS	Vertical	PK
12	11897.7932	2.74	45.37	48.11	74.00	25.89	PASS	Vertical	PK

Remark			(Wio-LR1121) Fiberglass Antenna						
Mode:			Transmitting			Channel:		903 MHz	
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1112.6742	-22.82	66.28	43.46	74.00	30.54	PASS	Horizontal	PK
2	1806.0537	-20.11	78.19	58.08	74.00	15.92	PASS	Horizontal	PK
3	3005.2003	-14.60	54.62	40.02	74.00	33.98	PASS	Horizontal	PK
4	4250.0333	-10.54	51.48	40.94	74.00	33.06	PASS	Horizontal	PK
5	6369.1746	-4.35	49.91	45.56	74.00	28.44	PASS	Horizontal	PK
6	10238.2325	1.87	44.03	45.90	74.00	28.10	PASS	Horizontal	PK
7	1089.3393	-22.78	72.07	49.29	74.00	24.71	PASS	Vertical	PK
8	1806.5871	-20.11	80.01	59.90	74.00	14.10	PASS	Vertical	PK
9	3198.2632	-14.46	60.40	45.94	74.00	28.06	PASS	Vertical	PK
10	5418.1612	-6.61	52.39	45.78	74.00	28.22	PASS	Vertical	PK
11	6378.2752	-4.36	56.96	52.60	74.00	21.40	PASS	Vertical	PK
12	11288.7026	2.43	45.01	47.44	74.00	26.56	PASS	Vertical	PK

Remark			(Wio-LR1121) Fiberglass Antenna						
Mode:			Transmitting			Channel:		909.4 MHz	
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1079.7386	-22.73	65.30	42.57	74.00	31.43	PASS	Horizontal	PK
2	1818.5879	-20.09	81.50	61.41	74.00	12.59	PASS	Horizontal	PK
3	2393.8263	-17.89	59.85	41.96	74.00	32.04	PASS	Horizontal	PK
4	3329.572	-14.04	53.94	39.90	74.00	34.10	PASS	Horizontal	PK
5	6332.1221	-4.53	49.33	44.80	74.00	29.20	PASS	Horizontal	PK
6	11758.6839	2.41	45.83	48.24	74.00	25.76	PASS	Horizontal	PK
7	1094.4063	-22.79	71.65	48.86	74.00	25.14	PASS	Vertical	PK
8	1818.5879	-20.09	82.56	62.47	74.00	11.53	PASS	Vertical	PK
9	2390.7594	-17.90	63.30	45.40	74.00	28.60	PASS	Vertical	PK
10	3191.1127	-14.49	60.47	45.98	74.00	28.02	PASS	Vertical	PK
11	6374.375	-4.36	50.05	45.69	74.00	28.31	PASS	Vertical	PK
12	11343.3062	2.31	44.17	46.48	74.00	27.52	PASS	Vertical	PK

Remark			(Wio-LR1121) Fiberglass Antenna						
Mode:			Transmitting			Channel:		914.2 MHz	
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1248.0165	-22.36	71.95	49.59	74.00	24.41	PASS	Horizontal	PK
2	1828.0552	-20.07	72.82	52.75	74.00	21.25	PASS	Horizontal	PK
3	2393.9596	-17.89	58.06	40.17	74.00	33.83	PASS	Horizontal	PK
4	4229.2319	-10.76	51.29	40.53	74.00	33.47	PASS	Horizontal	PK
5	5905.0437	-5.66	48.96	43.30	74.00	30.70	PASS	Horizontal	PK
6	7788.8693	-1.94	47.12	45.18	74.00	28.82	PASS	Horizontal	PK
7	1098.2732	-22.81	73.21	50.40	74.00	23.60	PASS	Vertical	PK
8	1828.0552	-20.07	74.99	54.92	74.00	19.08	PASS	Vertical	PK
9	2395.1597	-17.89	64.36	46.47	74.00	27.53	PASS	Vertical	PK
10	3200.2133	-14.46	59.75	45.29	74.00	28.71	PASS	Vertical	PK
11	6374.375	-4.36	53.82	49.46	74.00	24.54	PASS	Vertical	PK
12	11668.9779	2.50	45.00	47.50	74.00	26.50	PASS	Vertical	PK

Remark			(Wio-LR1121-N) Fiberglass Antenna						
Mode:			Transmitting			Channel:		903 MHz	
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1425.3617	-21.66	62.63	40.97	74.00	33.03	PASS	Horizontal	PK
2	1806.0537	-20.11	77.19	57.08	74.00	16.92	PASS	Horizontal	PK
3	3107.2572	-14.70	55.08	40.38	74.00	33.62	PASS	Horizontal	PK
4	4749.9167	-8.64	49.56	40.92	74.00	33.08	PASS	Horizontal	PK
5	6369.1746	-4.35	49.91	45.56	74.00	28.44	PASS	Horizontal	PK
6	10238.2325	1.87	43.53	45.40	74.00	28.60	PASS	Horizontal	PK
7	1421.6281	-21.66	67.86	46.20	74.00	27.80	PASS	Vertical	PK
8	1805.6537	-20.11	78.75	58.64	74.00	15.36	PASS	Vertical	PK
9	3198.2632	-14.46	60.40	45.94	74.00	28.06	PASS	Vertical	PK
10	5418.1612	-6.61	52.39	45.78	74.00	28.22	PASS	Vertical	PK
11	6378.2752	-4.36	54.96	50.60	74.00	23.40	PASS	Vertical	PK
12	9729.2486	1.29	45.04	46.33	74.00	27.67	PASS	Vertical	PK

Remark			(Wio-LR1121-N) Fiberglass Antenna						
Mode:			Transmitting			Channel:		909.4 MHz	
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1423.8949	-21.65	61.97	40.32	74.00	33.68	PASS	Horizontal	PK
2	1818.4546	-20.09	80.39	60.30	74.00	13.70	PASS	Horizontal	PK
3	3329.572	-14.04	53.94	39.90	74.00	34.10	PASS	Horizontal	PK
4	4933.8789	-8.11	49.59	41.48	74.00	32.52	PASS	Horizontal	PK
5	7965.031	-1.38	46.48	45.10	74.00	28.90	PASS	Horizontal	PK
6	12315.121	3.79	43.72	47.51	74.00	26.49	PASS	Horizontal	PK
7	1433.6289	-21.64	66.12	44.48	74.00	29.52	PASS	Vertical	PK
8	1818.5879	-20.09	81.06	60.97	74.00	13.03	PASS	Vertical	PK
9	2789.586	-16.22	57.24	41.02	74.00	32.98	PASS	Vertical	PK
10	4311.1374	-10.11	51.53	41.42	74.00	32.58	PASS	Vertical	PK
11	7862.3242	-1.56	47.33	45.77	74.00	28.23	PASS	Vertical	PK
12	11783.3856	2.38	44.77	47.15	74.00	26.85	PASS	Vertical	PK

Remark			(Wio-LR1121-N) Fiberglass Antenna						
Mode:			Transmitting			Channel:		914.2 MHz	
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1248.0165	-22.36	70.45	48.09	74.00	25.91	PASS	Horizontal	PK
2	1828.0552	-20.07	71.32	51.25	74.00	22.75	PASS	Horizontal	PK
3	2393.9596	-17.89	58.06	40.17	74.00	33.83	PASS	Horizontal	PK
4	4129.7753	-10.94	50.94	40.00	74.00	34.00	PASS	Horizontal	PK
5	5379.1586	-6.81	48.40	41.59	74.00	32.41	PASS	Horizontal	PK
6	9672.0448	1.23	44.32	45.55	74.00	28.45	PASS	Horizontal	PK
7	1371.7581	-21.86	67.52	45.66	74.00	28.34	PASS	Vertical	PK
8	1828.0552	-20.07	74.99	54.92	74.00	19.08	PASS	Vertical	PK
9	2990.1327	-15.57	55.31	39.74	74.00	34.26	PASS	Vertical	PK
10	5483.8156	-6.48	49.54	43.06	74.00	30.94	PASS	Vertical	PK
11	8647.5765	-0.59	46.15	45.56	74.00	28.44	PASS	Vertical	PK
12	11717.7312	2.57	44.43	47.00	74.00	27.00	PASS	Vertical	PK

Remark			(Wio-LR1121-N) FPC Antenna						
Mode:			Transmitting			Channel:		903 MHz	
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1354.557	-21.98	64.74	42.76	74.00	31.24	PASS	Horizontal	PK
2	1805.6537	-20.11	67.87	47.76	74.00	26.24	PASS	Horizontal	PK
3	3611.0407	-13.17	53.34	40.17	74.00	33.83	PASS	Horizontal	PK
4	6375.025	-4.36	48.65	44.29	74.00	29.71	PASS	Horizontal	PK
5	9233.9156	0.50	46.17	46.67	74.00	27.33	PASS	Horizontal	PK
6	11821.0881	2.43	45.58	48.01	74.00	25.99	PASS	Horizontal	PK
7	1425.495	-21.66	65.12	43.46	74.00	30.54	PASS	Vertical	PK
8	1805.5204	-20.11	65.42	45.31	74.00	28.69	PASS	Vertical	PK
9	2795.8531	-16.20	59.06	42.86	74.00	31.14	PASS	Vertical	PK
10	4794.1196	-8.62	51.30	42.68	74.00	31.32	PASS	Vertical	PK
11	7701.7635	-1.68	47.00	45.32	74.00	28.68	PASS	Vertical	PK
12	11803.5369	2.37	46.10	48.47	74.00	25.53	PASS	Vertical	PK

Remark			(Wio-LR1121-N) FPC Antenna						
Mode:			Transmitting			Channel:		909.4 MHz	
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1363.8909	-21.92	63.65	41.73	74.00	32.27	PASS	Horizontal	PK
2	1819.1213	-20.09	69.89	49.80	74.00	24.20	PASS	Horizontal	PK
3	2393.1595	-17.90	59.64	41.74	74.00	32.26	PASS	Horizontal	PK
4	3637.6925	-12.96	56.51	43.55	74.00	30.45	PASS	Horizontal	PK
5	7920.8281	-1.37	46.65	45.28	74.00	28.72	PASS	Horizontal	PK
6	11305.6037	2.42	45.26	47.68	74.00	26.32	PASS	Horizontal	PK
7	1438.5626	-21.63	66.10	44.47	74.00	29.53	PASS	Vertical	PK
8	1818.7212	-20.09	63.23	43.14	74.00	30.86	PASS	Vertical	PK
9	2794.5196	-16.21	58.73	42.52	74.00	31.48	PASS	Vertical	PK
10	6409.4773	-4.35	50.35	46.00	74.00	28.00	PASS	Vertical	PK
11	7998.1832	-1.36	48.94	47.58	74.00	26.42	PASS	Vertical	PK
12	11304.3036	2.42	44.26	46.68	74.00	27.32	PASS	Vertical	PK

Remark			(Wio-LR1121-N) FPC Antenna						
Mode:			Transmitting			Channel:		914.2 MHz	
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1376.2918	-21.84	63.55	41.71	74.00	32.29	PASS	Horizontal	PK
2	1828.8553	-20.07	67.46	47.39	74.00	26.61	PASS	Horizontal	PK
3	2741.9828	-16.37	63.31	46.94	74.00	27.06	PASS	Horizontal	PK
4	4183.0789	-11.02	50.64	39.62	74.00	34.38	PASS	Horizontal	PK
5	7976.0817	-1.38	47.79	46.41	74.00	27.59	PASS	Horizontal	PK
6	11789.886	2.37	46.86	49.23	74.00	24.77	PASS	Horizontal	PK
7	1430.162	-21.64	64.63	42.99	74.00	31.01	PASS	Vertical	PK
8	2191.4128	-18.64	59.57	40.93	74.00	33.07	PASS	Vertical	PK
9	3766.4011	-12.72	52.43	39.71	74.00	34.29	PASS	Vertical	PK
10	5485.1157	-6.49	51.78	45.29	74.00	28.71	PASS	Vertical	PK
11	7968.2812	-1.38	47.83	46.45	74.00	27.55	PASS	Vertical	PK
12	11689.1293	2.60	44.58	47.18	74.00	26.82	PASS	Vertical	PK

Remark:

- 1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor
- 2) Scan from 9kHz to 25GHz, the disturbance above 10GHz and below 30MHz was very low. As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak measurements were shown in the report.

6 Appendix A

Refer to Appendix: 915M of EED32R80625602

Statement

1. This report is considered invalid without approved signature, special seal and the seal on the perforation;
2. The Company Name shown on Report and Address, the sample(s) and sample information was/were provided by the applicant who should be responsible for the authenticity which CTI hasn't verified;
3. The result(s) shown in this report refer(s) only to the sample(s) tested;
4. Unless otherwise stated, the decision rule for conformity reporting is based on Binary Statement for Simple Acceptance Rule stated in ILAC-G8:09/2019/CNAS-GL015:2022;
5. Without written approval of CTI, this report can't be reproduced except in full.

*** End of Report ***