



# RADIO TEST REPORT

**FCC ID** : ZQ6-AP6275P  
**Equipment** : Wi-Fi/Bluetooth Module  
**Brand Name** : AMPAK Technology Inc.  
**Model Name** : AP6275P  
**Applicant** : AMPAK Technology Inc.  
3F, No. 1, Jen Ai Road, Hsinchu Industrial Park, Hsinchu City  
30352, Taiwan (R.O.C.)  
**Manufacturer** : BILLIONTON SYSTEMS INC.  
No. 21, Sui-Lih Rd., Hsin-Chu City 300, Taiwan (R.O.C.)  
**Standard** : 47 CFR FCC Part 15.407

The product was received on Jun. 17, 2024, and testing was started from Jun. 20, 2024 and completed on Aug. 09, 2024. We, Sporton International Inc. Hsinchu Laboratory, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2013 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. Hsinchu Laboratory, the test report shall not be reproduced except in full.

Approved by: Sam Chen

**Sporton International Inc. Hsinchu Laboratory**

No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County 302010, Taiwan (R.O.C.)



## Table of Contents

|                                                                      |           |
|----------------------------------------------------------------------|-----------|
| <b>History of this test report.....</b>                              | <b>3</b>  |
| <b>Summary of Test Result.....</b>                                   | <b>4</b>  |
| <b>1 General Description .....</b>                                   | <b>5</b>  |
| 1.1 Information.....                                                 | 5         |
| 1.2 Applicable Standards .....                                       | 9         |
| 1.3 Testing Location Information .....                               | 9         |
| 1.4 Measurement Uncertainty .....                                    | 10        |
| <b>2 Test Configuration of EUT .....</b>                             | <b>11</b> |
| 2.1 Test Channel Mode .....                                          | 11        |
| 2.2 The Worst Case Measurement Configuration .....                   | 13        |
| 2.3 EUT Operation during Test .....                                  | 14        |
| 2.4 Accessories .....                                                | 14        |
| 2.5 Support Equipment.....                                           | 14        |
| 2.6 Test Setup Diagram .....                                         | 16        |
| <b>3 Transmitter Test Result .....</b>                               | <b>19</b> |
| 3.1 AC Power-line Conducted Emissions .....                          | 19        |
| 3.2 Emission Bandwidth .....                                         | 21        |
| 3.3 Maximum Output Power .....                                       | 22        |
| 3.4 Power Spectral Density .....                                     | 25        |
| 3.5 Unwanted Emissions.....                                          | 28        |
| <b>4 Test Equipment and Calibration Data .....</b>                   | <b>32</b> |
| <b>Appendix A. Test Results of AC Power-line Conducted Emissions</b> |           |
| <b>Appendix B. Test Results of Emission Bandwidth</b>                |           |
| <b>Appendix C. Test Results of Maximum Output Power</b>              |           |
| <b>Appendix D. Test Results of Power Spectral Density</b>            |           |
| <b>Appendix E. Test Results of Unwanted Emissions</b>                |           |
| <b>Appendix F. Test Photos</b>                                       |           |
| <b>Photographs of EUT v01</b>                                        |           |



TEL : 886-3-656-9065  
FAX : 886-3-656-9085  
Report Template No.: CB-A12\_1 Ver1.4



## Summary of Test Result

| Report Clause | Ref Std. Clause | Test Items                        | Result (PASS/FAIL) | Remark |
|---------------|-----------------|-----------------------------------|--------------------|--------|
| 1.1.2         | 15.203          | Antenna Requirement               | PASS               | -      |
| 3.1           | 15.207          | AC Power-line Conducted Emissions | PASS               | -      |
| 3.2           | 15.407(a)       | Emission Bandwidth                | PASS               | -      |
| 3.3           | 15.407(a)       | Maximum Output Power              | PASS               | -      |
| 3.4           | 15.407(a)       | Power Spectral Density            | PASS               | -      |
| 3.5           | 15.407(b)       | Unwanted Emissions                | PASS               | -      |

**Conformity Assessment Condition:**

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the chapter "Measurement Uncertainty".

**Disclaimer:**

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

**Reviewed by: Sam Chen****Report Producer: Cathy Chiu**



# 1 General Description

## 1.1 Information

### 1.1.1 RF General Information

| Frequency Range (MHz) | IEEE Std. 802.11                       | Ch. Frequency (MHz) | Channel Number |
|-----------------------|----------------------------------------|---------------------|----------------|
| 5150-5250             | a, n (HT20), ac (VHT20),<br>ax (HEW20) | 5180-5240           | 36-48 [4]      |
| 5250-5350             |                                        | 5260-5320           | 52-64 [4]      |
| 5470-5725             |                                        | 5500-5720           | 100-144 [12]   |
| 5725-5850             |                                        | 5745-5825           | 149-165 [5]    |
| 5150-5250             | n (HT40), ac (VHT40),<br>ax (HEW40)    | 5190-5230           | 38-46 [2]      |
| 5250-5350             |                                        | 5270-5310           | 54-62 [2]      |
| 5470-5725             |                                        | 5510-5710           | 102-142 [6]    |
| 5725-5850             |                                        | 5755-5795           | 151-159 [2]    |
| 5150-5250             | ac (VHT80), ax (HEW80)                 | 5210                | 42 [1]         |
| 5250-5350             |                                        | 5290                | 58 [1]         |
| 5470-5725             |                                        | 5530-5690           | 106-138 [3]    |
| 5725-5850             |                                        | 5775                | 155 [1]        |

| Band         | Mode           | BWch (MHz) | Nant |
|--------------|----------------|------------|------|
| 5.15-5.25GHz | 802.11a        | 20         | 2TX  |
| 5.15-5.25GHz | 802.11n HT20   | 20         | 2TX  |
| 5.15-5.25GHz | 802.11ac VHT20 | 20         | 2TX  |
| 5.15-5.25GHz | 802.11ax HEW20 | 20         | 2TX  |
| 5.15-5.25GHz | 802.11n HT40   | 40         | 2TX  |
| 5.15-5.25GHz | 802.11ac VHT40 | 40         | 2TX  |
| 5.15-5.25GHz | 802.11ax HEW40 | 40         | 2TX  |
| 5.15-5.25GHz | 802.11ac VHT80 | 80         | 2TX  |
| 5.15-5.25GHz | 802.11ax HEW80 | 80         | 2TX  |
| 5.25-5.35GHz | 802.11a        | 20         | 2TX  |
| 5.25-5.35GHz | 802.11n HT20   | 20         | 2TX  |
| 5.25-5.35GHz | 802.11ac VHT20 | 20         | 2TX  |
| 5.25-5.35GHz | 802.11ax HEW20 | 20         | 2TX  |
| 5.25-5.35GHz | 802.11n HT40   | 40         | 2TX  |
| 5.25-5.35GHz | 802.11ac VHT40 | 40         | 2TX  |
| 5.25-5.35GHz | 802.11ax HEW40 | 40         | 2TX  |
| 5.25-5.35GHz | 802.11ac VHT80 | 80         | 2TX  |
| 5.25-5.35GHz | 802.11ax HEW80 | 80         | 2TX  |



| Band          | Mode           | BWch (MHz) | Nant |
|---------------|----------------|------------|------|
| 5.47-5.725GHz | 802.11a        | 20         | 2TX  |
| 5.47-5.725GHz | 802.11n HT20   | 20         | 2TX  |
| 5.47-5.725GHz | 802.11ac VHT20 | 20         | 2TX  |
| 5.47-5.725GHz | 802.11ax HEW20 | 20         | 2TX  |
| 5.47-5.725GHz | 802.11n HT40   | 40         | 2TX  |
| 5.47-5.725GHz | 802.11ac VHT40 | 40         | 2TX  |
| 5.47-5.725GHz | 802.11ax HEW40 | 40         | 2TX  |
| 5.47-5.725GHz | 802.11ac VHT80 | 80         | 2TX  |
| 5.47-5.725GHz | 802.11ax HEW80 | 80         | 2TX  |
| 5.725-5.85GHz | 802.11a        | 20         | 2TX  |
| 5.725-5.85GHz | 802.11n HT20   | 20         | 2TX  |
| 5.725-5.85GHz | 802.11ac VHT20 | 20         | 2TX  |
| 5.725-5.85GHz | 802.11ax HEW20 | 20         | 2TX  |
| 5.725-5.85GHz | 802.11n HT40   | 40         | 2TX  |
| 5.725-5.85GHz | 802.11ac VHT40 | 40         | 2TX  |
| 5.725-5.85GHz | 802.11ax HEW40 | 40         | 2TX  |
| 5.725-5.85GHz | 802.11ac VHT80 | 80         | 2TX  |
| 5.725-5.85GHz | 802.11ax HEW80 | 80         | 2TX  |

**Note:**

- ♦ 11a, HT20 and HT40 use a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM modulation.
- ♦ VHT20, VHT40, VHT80 use a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM, 256QAM modulation.
- ♦ HEW20, HEW40, HEW80 use a combination of OFDMA-BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM modulation.
- ♦ BWch is the nominal channel bandwidth.



## 1.1.2 Antenna Information

| Ant. | Port   |      |           | Brand                     | Model Name | Antenna Type | Connector    | Gain (dBi) |
|------|--------|------|-----------|---------------------------|------------|--------------|--------------|------------|
|      | 2.4GHz | 5GHz | Bluetooth |                           |            |              |              |            |
| 1    | 1      | 1    | 1         | PULSE ELECTRONICS PTE LTD | TZ2412W    | Dipole       | Reversed-SMA | Note1      |
| 2    | 2      | 2    | -         | PULSE ELECTRONICS PTE LTD | TZ2412W    | Dipole       | Reversed-SMA |            |

Note1:

| Ant. | Antenna Gain (dBi) |                    |           |
|------|--------------------|--------------------|-----------|
|      | WLAN 2.4GHz        | WLAN 5GHz UNII 1~3 | Bluetooth |
| 1    | 3.68               | 4.65               | 3.68      |
| 2    | 3.68               | 4.65               | -         |

Note2: The above information was declared by manufacturer.

Note3: Directional gain information

| Type   | Maximum Output Power                                                                                                                                | Power Spectral Density                                                                                                              |
|--------|-----------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------|
| Non-BF | Directional gain = Max.gain + array gain.<br>For power measurements on IEEE 802.11 devices<br>Array Gain = 0 dB (i.e., no array gain) for N ANT ≤ 4 | $DirectionalGain = 10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{ANT}} \left( \sum_{k=1}^{N_{ANT}} g_{j,k} \right)^2}{N_{ANT}} \right]$ |
| BF     | $DirectionalGain = 10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{ANT}} \left( \sum_{k=1}^{N_{ANT}} g_{j,k} \right)^2}{N_{ANT}} \right]$                 | $DirectionalGain = 10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{ANT}} \left( \sum_{k=1}^{N_{ANT}} g_{j,k} \right)^2}{N_{ANT}} \right]$ |

Ex.

Directional Gain (NSS1) formula :

$$DirectionalGain = 10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{ANT}} \left( \sum_{k=1}^{N_{ANT}} g_{j,k} \right)^2}{N_{ANT}} \right]$$

$$NSS1(g1,1) = 10^{G1/20} ; NSS1(g1,2) = 10^{G2/20} ; NSS1(g1,3) = 10^{G3/20} ; NSS1(g1,4) = 10^{G4/20}$$

$$g_{j,k} = (NSS1(g1,1) + NSS1(g1,2) + NSS1(g1,3) + NSS1(g1,4))^2$$

$$DG = 10 \log[(NSS1(g1,1) + NSS1(g1,2) + NSS1(g1,3) + NSS1(g1,4))^2 / N_{ANT}] \Rightarrow 10$$

$$\log[(10^{G1/20} + 10^{G2/20} + 10^{G3/20} + 10^{G4/20})^2 / N_{ANT}]$$

Where ;

$$2.4G \ G1 = 3.68 \text{ dBi} ; G2 = 3.68 \text{ dBi} ;$$

$$5G \text{ UNII-1} \ G1 = 4.65 \text{ dBi} ; G2 = 4.65 \text{ dBi} ;$$

$$5G \text{ UNII-2A} \ G1 = 4.65 \text{ dBi} ; G2 = 4.65 \text{ dBi} ;$$

$$5G \text{ UNII-2C} \ G1 = 4.65 \text{ dBi} ; G2 = 4.65 \text{ dBi} ;$$

$$5G \text{ UNII-3} \ G1 = 4.65 \text{ dBi} ; G2 = 4.65 \text{ dBi} ;$$

$$2.4G \ DG = 6.69 \text{ dBi}$$

$$5G \text{ UNII-1} \ DG = 7.66 \text{ dBi}$$

$$5G \text{ UNII-2A} \ DG = 7.66 \text{ dBi}$$

$$5G \text{ UNII-2C} \ DG = 7.66 \text{ dB}$$

$$5G \text{ UNII-3} \ DG = 7.66 \text{ dBi}$$



**For 2.4GHz function:**

**For IEEE 802.11b/g/n/ax (2TX/2RX):**

Port 1 and Port 2 can be used as transmitting/receiving antenna.

Port 1 and Port 2 could transmit/receive simultaneously.

**For 5GHz function:**

**For IEEE 802.11a/n/ac/ax (2TX/2RX):**

Port 1 and Port 2 can be used as transmitting/receiving antenna.

Port 1 and Port 2 could transmit/receive simultaneously.

**For Bluetooth function (1TX/1RX):**

Only Port 1 can be used as transmitting/receiving antenna.

### 1.1.3 Mode Test Duty Cycle

| Mode           | DC    | DCF (dB) | T (s)          | VBW (Hz)_1/T   |
|----------------|-------|----------|----------------|----------------|
| 802.11a        | 0.938 | 0.28     | 1.4m           | 1k             |
| 802.11ax HEW20 | 0.982 | 0.08     | n/a (DC>=0.98) | n/a (DC>=0.98) |
| 802.11ax HEW40 | 0.966 | 0.15     | 773.75u        | 3k             |
| 802.11ax HEW80 | 0.971 | 0.13     | 623.75u        | 3k             |

Note:

- ♦ DC is Duty Cycle.
- ♦ DCF is Duty Cycle Factor.

### 1.1.4 EUT Operational Condition

|                                    |                                     |                              |                                     |                      |
|------------------------------------|-------------------------------------|------------------------------|-------------------------------------|----------------------|
| <b>EUT Power Type</b>              | From host system                    |                              |                                     |                      |
| <b>Beamforming Function</b>        | <input type="checkbox"/>            | With beamforming             | <input checked="" type="checkbox"/> | Without beamforming  |
| <b>Weather Band</b>                | <input checked="" type="checkbox"/> | With 5600~5650MHz            | <input type="checkbox"/>            | Without 5600~5650MHz |
| <b>Function</b>                    | <input type="checkbox"/>            | Outdoor P2M                  | <input type="checkbox"/>            | Indoor P2M           |
|                                    | <input type="checkbox"/>            | Fixed P2P                    | <input checked="" type="checkbox"/> | Client               |
|                                    | <input checked="" type="checkbox"/> | Point-to-multipoint          | <input type="checkbox"/>            | Point-to-point       |
| <b>TPC Function</b>                | <input type="checkbox"/>            | With TPC                     | <input checked="" type="checkbox"/> | Without TPC          |
| <b>Channel Puncturing Function</b> | <input type="checkbox"/>            | Supported Static Puncturing  |                                     |                      |
|                                    | <input type="checkbox"/>            | Supported Dynamic Puncturing |                                     |                      |
|                                    | <input checked="" type="checkbox"/> | Unsupported                  |                                     |                      |
| <b>Support RU</b>                  | <input checked="" type="checkbox"/> | Full RU                      | <input type="checkbox"/>            | Partial RU           |
| <b>Test Software Version</b>       | DOS [ver 6.1.7601]                  |                              |                                     |                      |

Note: The above information was declared by manufacturer.



## 1.2 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR FCC Part 15
- ♦ ANSI C63.10-2013
- ♦ FCC KDB 789033 D02 v02r01

The following reference test guidance is not within the scope of accreditation of TAF.

- ♦ FCC KDB 662911 D01 v02r01
- ♦ FCC KDB 412172 D01 v01r01
- ♦ FCC KDB 414788 D01 v01r01

## 1.3 Testing Location Information

| Testing Location Information                              |                                                                                                                                                                                                                                                |
|-----------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Lab. : Sporton International Inc. Hsinchu Laboratory |                                                                                                                                                                                                                                                |
| Hsinchu<br>(TAF: 3787)                                    | ADD: No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County 302010, Taiwan (R.O.C.)<br>TEL: 886-3-656-9065 FAX: 886-3-656-9085<br>Test site Designation No. TW3787 with FCC.<br>Conformity Assessment Body Identifier (CABID) TW3787 with ISED. |

| Test Condition           | Test Site No. | Test Engineer | Test Environment<br>(°C / %) | Test Date                       |
|--------------------------|---------------|---------------|------------------------------|---------------------------------|
| RF Conducted             | TH02-CB       | Mason Chen    | 22.2~25.7 / 61~66            | Jun. 27, 2024~<br>Jun. 29, 2024 |
| Radiated<br>(below 1GHz) | 03CH06-CB     | Jackson Peng  | 21.9-22.4 / 55-58            | Aug. 05, 2024                   |
| Radiated<br>(above 1GHz) | 03CH04-CB     | Gordon Hung   | 22-23 / 55-58                | Jun. 25, 2024~<br>Jun. 26, 2024 |
| AC Conduction            | CO01-CB       | Ryan Huang    | 22~23 / 61~63                | Aug. 09, 2024                   |



## 1.4 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

| Test Items                           | Uncertainty | Remark                   |
|--------------------------------------|-------------|--------------------------|
| Conducted Emission (150kHz ~ 30MHz)  | 3.8 dB      | Confidence levels of 95% |
| Radiated Emission (9kHz ~ 30MHz)     | 4.1 dB      | Confidence levels of 95% |
| Radiated Emission (30MHz ~ 1,000MHz) | 4.2 dB      | Confidence levels of 95% |
| Radiated Emission (1GHz ~ 18GHz)     | 4.2 dB      | Confidence levels of 95% |
| Radiated Emission (18GHz ~ 40GHz)    | 4.0 dB      | Confidence levels of 95% |
| Conducted Emission                   | 3.1 dB      | Confidence levels of 95% |
| Output Power Measurement             | 0.8 dB      | Confidence levels of 95% |
| Power Density Measurement            | 3.1 dB      | Confidence levels of 95% |
| Bandwidth Measurement                | 2.1 %       | Confidence levels of 95% |



## 2 Test Configuration of EUT

### 2.1 Test Channel Mode

| Mode                           |
|--------------------------------|
| 802.11a_Nss1,(6Mbps)_2TX       |
| 5180MHz                        |
| 5200MHz                        |
| 5240MHz                        |
| 5260MHz                        |
| 5300MHz                        |
| 5320MHz                        |
| 5500MHz                        |
| 5580MHz                        |
| 5700MHz                        |
| 5720MHz Straddle 5.47-5.725GHz |
| 5720MHz Straddle 5.725-5.85GHz |
| 5745MHz                        |
| 5785MHz                        |
| 5825MHz                        |
| 802.11ax HEW20_Nss1,(MCS0)_2TX |
| 5180MHz                        |
| 5200MHz                        |
| 5240MHz                        |
| 5260MHz                        |
| 5300MHz                        |
| 5320MHz                        |
| 5500MHz                        |
| 5580MHz                        |
| 5700MHz                        |
| 5720MHz Straddle 5.47-5.725GHz |
| 5720MHz Straddle 5.725-5.85GHz |
| 5745MHz                        |
| 5785MHz                        |
| 5825MHz                        |
| 802.11ax HEW40_Nss1,(MCS0)_2TX |
| 5190MHz                        |
| 5230MHz                        |
| 5270MHz                        |
| 5310MHz                        |
| 5510MHz                        |
| 5550MHz                        |
| 5670MHz                        |
| 5710MHz Straddle 5.47-5.725GHz |
| 5710MHz Straddle 5.725-5.85GHz |
| 5755MHz                        |
| 5795MHz                        |
| 802.11ax HEW80_Nss1,(MCS0)_2TX |



|                                |
|--------------------------------|
| 5210MHz                        |
| 5290MHz                        |
| 5530MHz                        |
| 5610MHz                        |
| 5690MHz Straddle 5.47-5.725GHz |
| 5690MHz Straddle 5.725-5.85GHz |
| 5775MHz                        |

**Note:**

- ♦ Evaluated HEW20/HEW40/HEW80 mode only, due to similar modulation. The power setting of HT20/HT40/VHT20/VHT40/VHT80 mode are the same or lower than HEW20/HEW40/HEW80.

## 2.2 The Worst Case Measurement Configuration

| The Worst Case Mode for Following Conformance Tests                           |                                                                                         |
|-------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------|
| <b>Tests Item</b>                                                             | AC power-line conducted emissions                                                       |
| <b>Condition</b>                                                              | AC power-line conducted measurement for line and neutral<br>Test Voltage: 120Vac / 60Hz |
| <b>Operating Mode</b>                                                         | Normal Link                                                                             |
| 1                                                                             | EUT + Bluetooth                                                                         |
| 2                                                                             | EUT + WLAN 2.4GHz                                                                       |
| 3                                                                             | EUT + WLAN 5GHz                                                                         |
| For operating mode 3 is the worst case and it was record in this test report. |                                                                                         |

| The Worst Case Mode for Following Conformance Tests |                                                                      |
|-----------------------------------------------------|----------------------------------------------------------------------|
| <b>Tests Item</b>                                   | Emission Bandwidth<br>Maximum Output Power<br>Power Spectral Density |
| <b>Test Condition</b>                               | Conducted measurement at transmit chains                             |

| The Worst Case Mode for Following Conformance Tests                                                                                                                       |                                                                                                                                                                                                                                                     |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Tests Item</b>                                                                                                                                                         | Unwanted Emissions                                                                                                                                                                                                                                  |
| <b>Test Condition</b>                                                                                                                                                     | Radiated measurement<br>If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type. |
| <b>Operating Mode &lt; 1GHz</b>                                                                                                                                           | Normal Link                                                                                                                                                                                                                                         |
| After evaluating, the worst case was found at Z axis, so it was selected to perform test and its test result was written in the report.                                   |                                                                                                                                                                                                                                                     |
| 1                                                                                                                                                                         | EUT in Z axis + Bluetooth                                                                                                                                                                                                                           |
| 2                                                                                                                                                                         | EUT in Z axis + WLAN 2.4GHz                                                                                                                                                                                                                         |
| 3                                                                                                                                                                         | EUT in Z axis + WLAN 5GHz                                                                                                                                                                                                                           |
| For operating mode 3 is the worst case and it was record in this test report.                                                                                             |                                                                                                                                                                                                                                                     |
| <b>Operating Mode &gt; 1GHz</b>                                                                                                                                           | CTX                                                                                                                                                                                                                                                 |
| After evaluating, the worst case was found at Z axis for bandedge, Y axis for harmonic, so it was selected to perform test and its test result was written in the report. |                                                                                                                                                                                                                                                     |
| 1                                                                                                                                                                         | EUT in Z axis for bandedge / EUT in Y axis for harmonic                                                                                                                                                                                             |



## 2.3 EUT Operation during Test

For CTX Mode:

The EUT was programmed to be in continuously transmitting mode.

For Normal Link:

During the test, the EUT operation to normal function.

## 2.4 Accessories

N/A

## 2.5 Support Equipment

For AC Conduction:

| Support Equipment |             |                       |                 |              |
|-------------------|-------------|-----------------------|-----------------|--------------|
| No.               | Equipment   | Brand Name            | Model Name      | FCC ID       |
| A                 | NB          | DELL                  | T420            | N/A          |
| B                 | Fixture     | AMPAK Technology Inc. | AP6271P_EVB_V05 | N/A          |
| C                 | ExpressCard | AMPAK Technology Inc. | E2M V1.0        | N/A          |
| D                 | Earphone    | SHYARO CHI            | MIC-04          | N/A          |
| E                 | Mouse       | HP                    | FM100           | N/A          |
| F                 | BT Fixture  | AMPAK Technology Inc. | UART_V06        | N/A          |
| G                 | AP Router   | ASUS                  | RT-AX88U        | MSQ-RTAXHP00 |
| H                 | Adapter     | Oppo                  | AK933GB         | N/A          |

**For Radiated (below 1GHz):**

| Support Equipment |             |                       |                 |        |
|-------------------|-------------|-----------------------|-----------------|--------|
| No.               | Equipment   | Brand Name            | Model Name      | FCC ID |
| A                 | NB          | Lenovo                | 42T4430         | N/A    |
| B                 | Fixture     | AMPAK Technology Inc. | AP6271P_EVB_V05 | N/A    |
| C                 | ExpressCard | AMPAK Technology Inc. | E2M V1.0        | N/A    |
| D                 | Earphone    | e-Power               | S90W            | N/A    |
| E                 | Mouse       | Logitech              | M-U0026         | N/A    |
| F                 | BT Fixture  | AMPAK Technology Inc. | UART_V06        | N/A    |
| G                 | AP Router   | ASUS                  | RT-AX88U        | N/A    |
| H                 | Adapter     | Apple                 | A1385           | N/A    |


**For Radiated (above 1GHz):**


| Support Equipment |                 |                       |                 |        |
|-------------------|-----------------|-----------------------|-----------------|--------|
| No.               | Equipment       | Brand Name            | Model Name      | FCC ID |
| A                 | DC Power Supply | MOTECH                | LPS-305         | N/A    |
| B                 | PC              | AMPAK Technology Inc. | H81-PLUS        | N/A    |
| C                 | Fixture         | AMPAK Technology Inc. | AP6271P_EVB_V05 | N/A    |

**For RF Conducted:**

| Support Equipment |                 |                       |                 |        |
|-------------------|-----------------|-----------------------|-----------------|--------|
| No.               | Equipment       | Brand Name            | Model Name      | FCC ID |
| A                 | PC              | AMPAK Technology Inc. | H81-PLUS        | N/A    |
| B                 | Fixture         | AMPAK Technology Inc. | AP6271P_EVB_V05 | N/A    |
| C                 | DC Power Supply | MOTECH                | LPS-305         | N/A    |

## 2.6 Test Setup Diagram

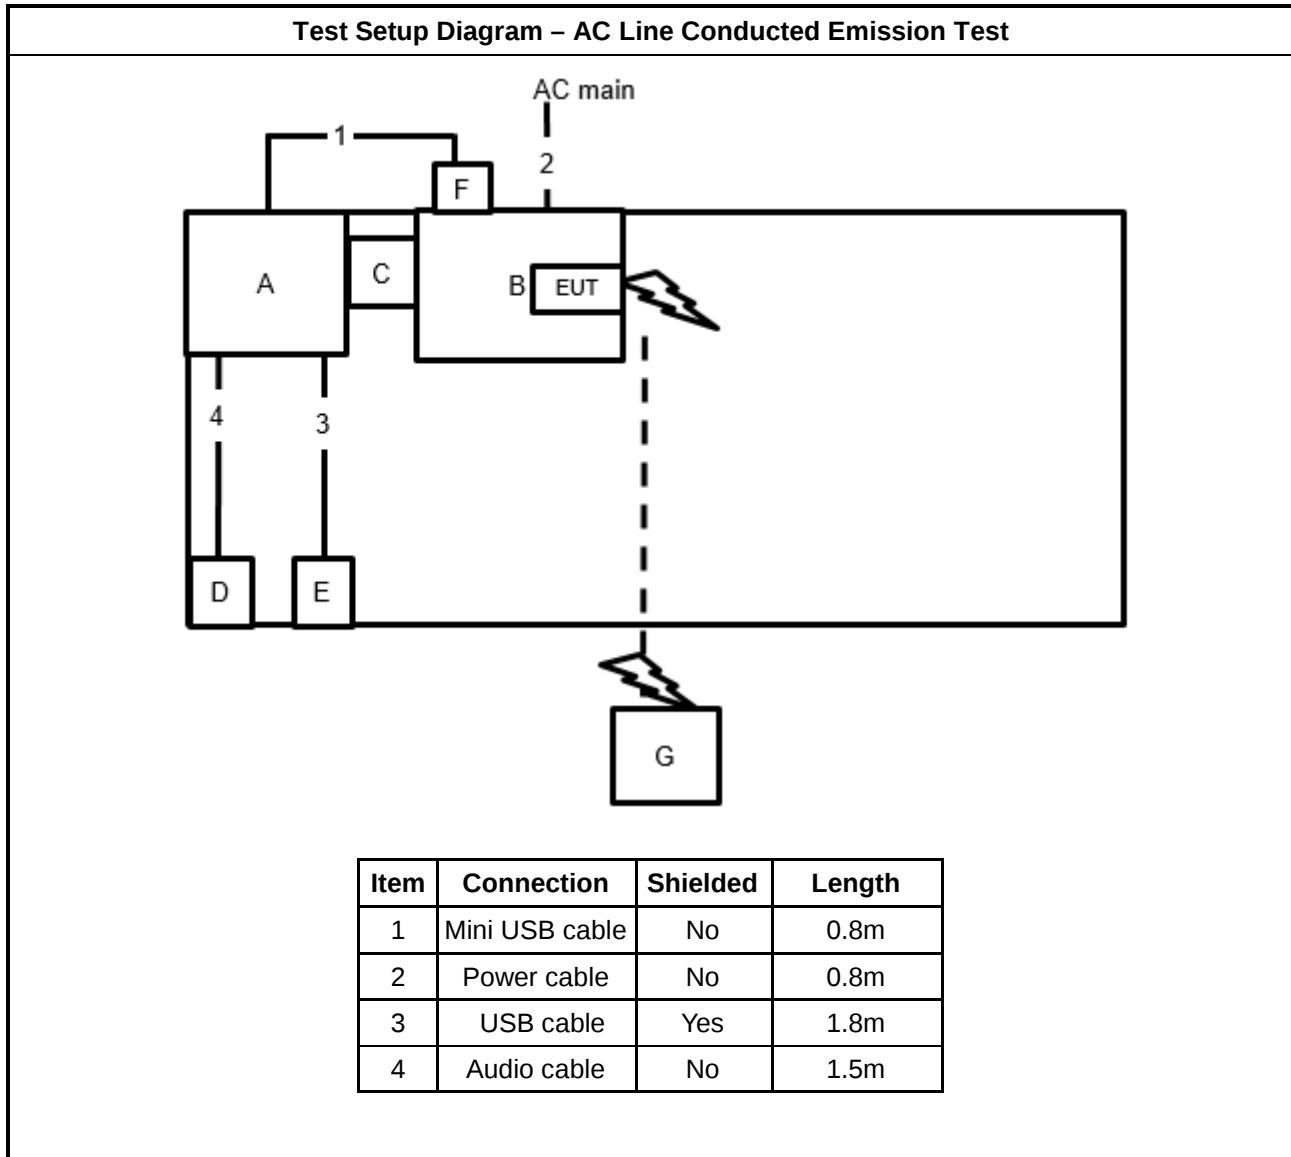


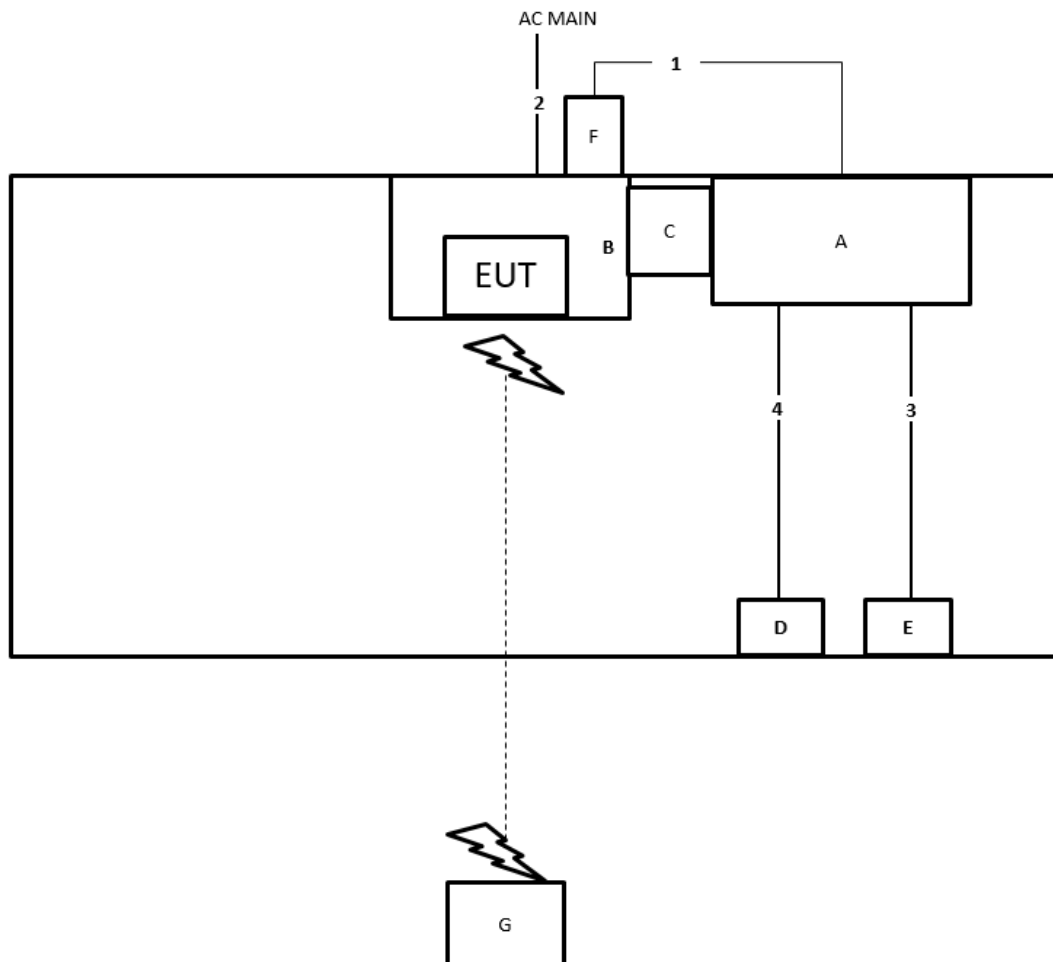**Test Setup Diagram - Radiated Test < 1GHz**


| Item | Connection     | Shielded | Length |
|------|----------------|----------|--------|
| 1    | Mini USB cable | No       | 1m     |
| 2    | Power cable    | No       | 1.5m   |
| 3    | USB cable      | Yes      | 1m     |
| 4    | Audio cable    | No       | 1.5m   |



### Test Setup Diagram - Radiated Test > 1GHz

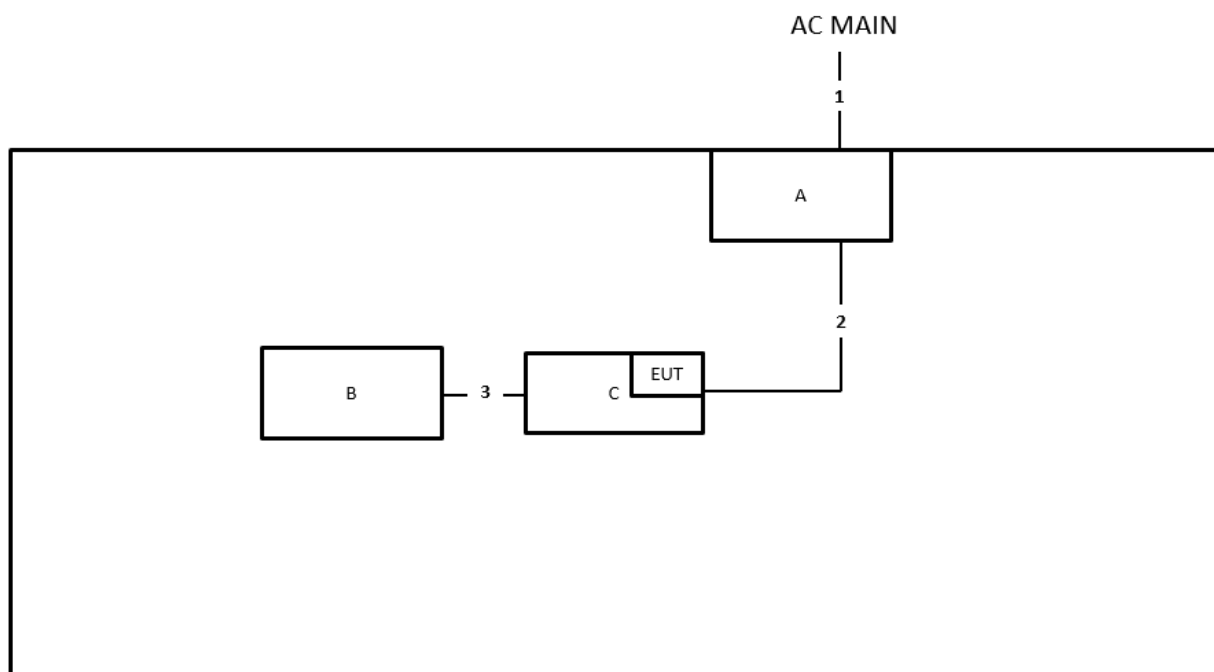

| Item | Connection             | Shielded | Length |
|------|------------------------|----------|--------|
| 1    | Power cable            | No       | 1m     |
| 2    | Crocodile clip cable*2 | No       | 1m     |
| 3    | Console cable          | No       | 1m     |



### 3 Transmitter Test Result

#### 3.1 AC Power-line Conducted Emissions

##### 3.1.1 AC Power-line Conducted Emissions Limit

| AC Power-line Conducted Emissions Limit                  |            |           |
|----------------------------------------------------------|------------|-----------|
| Frequency Emission (MHz)                                 | Quasi-Peak | Average   |
| 0.15-0.5                                                 | 66 - 56 *  | 56 - 46 * |
| 0.5-5                                                    | 56         | 46        |
| 5-30                                                     | 60         | 50        |
| Note 1: * Decreases with the logarithm of the frequency. |            |           |


##### 3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

##### 3.1.3 Test Procedures

| Test Method                                                                                                      |
|------------------------------------------------------------------------------------------------------------------|
| <input checked="" type="checkbox"/> Refer as ANSI C63.10-2013, clause 6.2 for AC power-line conducted emissions. |

### 3.1.4 Test Setup

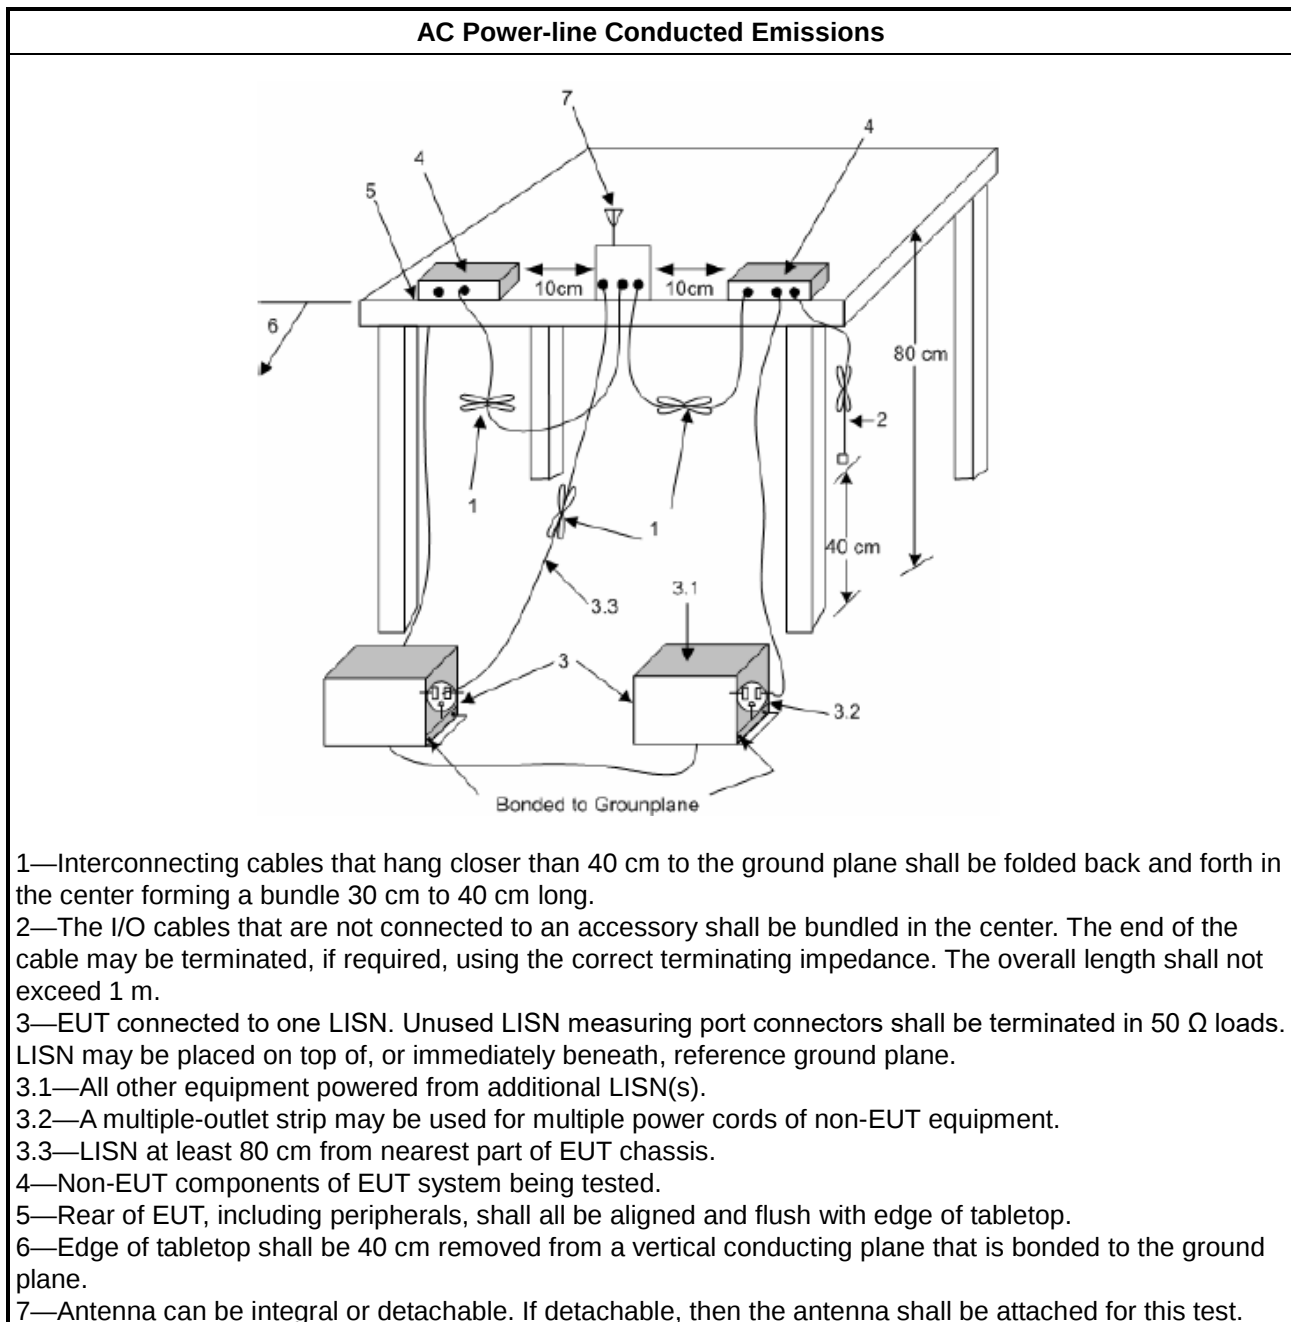

### 3.1.5 Measurement Results Calculation

The measured Level is calculated using:

- a. Corrected Reading: LISN Factor (LISN) + Attenuator (AT/AUX) + Cable Loss (CL) + Read Level (Raw) = Level
- b. Margin = -Limit + Level

### 3.1.6 Test Result of AC Power-line Conducted Emissions

Refer as Appendix A

## 3.2 Emission Bandwidth

### 3.2.1 Emission Bandwidth Limit

| Emission Bandwidth Limit            |                                                                                                                                                                                           |
|-------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>UNII Devices</b>                 |                                                                                                                                                                                           |
| <input checked="" type="checkbox"/> | For the 5.15-5.25 GHz band, N/A                                                                                                                                                           |
| <input checked="" type="checkbox"/> | For the 5.25-5.35 GHz band, the maximum conducted output power shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$ , where B is the 26 dB emission bandwidth in MHz.    |
| <input checked="" type="checkbox"/> | For the 5.47-5.725 GHz band, the maximum conducted output power shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$ , where B is the 26 dB emission bandwidth in MHz.   |
| <input checked="" type="checkbox"/> | For the 5.725-5.85 GHz band, 26 dB emission bandwidth ,N/A.<br>6 dB emission bandwidth $\geq 500\text{kHz}$ .                                                                             |
| <b>LE-LAN Devices</b>               |                                                                                                                                                                                           |
| <input type="checkbox"/>            | For the band 5.15-5.25 GHz, the maximum e.i.r.p. shall not exceed 200 mW or $10 + 10 \log B$ , dBm, whichever power is less. B is the 99% emission bandwidth in MHz.                      |
| <input type="checkbox"/>            | For the 5.25-5.35 GHz band, the maximum e.i.r.p. shall not exceed 1.0 W or $17 + 10 \log B$ , dBm, whichever power is less. B is the 99% emission bandwidth in MHz                        |
| <input type="checkbox"/>            | For the 5.47-5.6 GHz band and 5.65-5.725 GHz band, the maximum e.i.r.p. shall not exceed 1.0 W or $17 + 10 \log B$ , dBm, whichever power is less. B is the 99% emission bandwidth in MHz |
| <input type="checkbox"/>            | For the 5.725-5.85 GHz band, 6 dB emission bandwidth $\geq 500\text{kHz}$ .                                                                                                               |


### 3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

### 3.2.3 Test Procedures

| Test Method                                                                                                                    |                                                                                 |
|--------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------|
| <ul style="list-style-type: none"> <li>For the emission bandwidth shall be measured using one of the options below:</li> </ul> |                                                                                 |
| <input checked="" type="checkbox"/>                                                                                            | Refer as FCC KDB 789033 D02, clause C for EBW and clause D for OBW measurement. |
| <input type="checkbox"/>                                                                                                       | Refer as ANSI C63.10, clause 6.9.1 for occupied bandwidth testing.              |
| <input type="checkbox"/>                                                                                                       | Refer as IC RSS-Gen, clause 4.6 for bandwidth testing.                          |

### 3.2.4 Test Setup

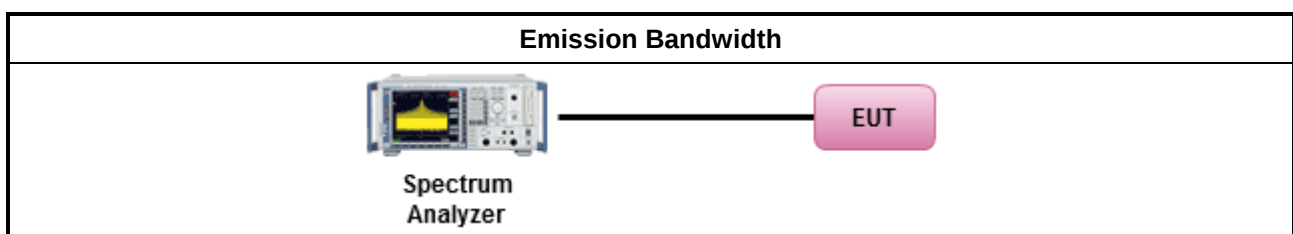

### 3.2.5 Test Result of Emission Bandwidth

Refer as Appendix B



### 3.3 Maximum Output Power

#### 3.3.1 Limit

| Maximum Output Power Limit                                                                                                                                                                                                                                                                               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>UNII Devices</b>                                                                                                                                                                                                                                                                                      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <input checked="" type="checkbox"/> For the 5.15-5.25 GHz band:                                                                                                                                                                                                                                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <input type="checkbox"/>                                                                                                                                                                                                                                                                                 | <ul style="list-style-type: none"><li>Outdoor AP: the maximum conducted output power (<math>P_{Out}</math>) shall not exceed the lesser of 1 W. If <math>G_{TX} &gt; 6</math> dBi, then <math>P_{Out} = 30 - (G_{TX} - 6)</math>. e.i.r.p. at any elevation angle above 30 degrees <math>\leq 125</math>mW [21dBm]</li><li>Indoor AP: the maximum conducted output power (<math>P_{Out}</math>) shall not exceed the lesser of 1 W. If <math>G_{TX} &gt; 6</math> dBi, then <math>P_{Out} = 30 - (G_{TX} - 6)</math></li><li>Point-to-point AP: the maximum conducted output power (<math>P_{Out}</math>) shall not exceed the lesser of 1 W. If <math>G_{TX} &gt; 23</math> dBi, then <math>P_{Out} = 30 - (G_{TX} - 23)</math>.</li><li>Mobile or Portable Client: the maximum conducted output power (<math>P_{Out}</math>) shall not exceed the lesser of 250 mW. If <math>G_{TX} &gt; 6</math> dBi, then <math>P_{Out} = 24 - (G_{TX} - 6)</math>.</li></ul> |
| <input checked="" type="checkbox"/> For the 5.25-5.35 GHz band, the maximum conducted output power ( $P_{Out}$ ) shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in MHz. If $G_{TX} > 6$ dBi, then $P_{Out} = 24 - (G_{TX} - 6)$ .                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <input checked="" type="checkbox"/> For the 5.47-5.725 GHz band, the maximum conducted output power ( $P_{Out}$ ) shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in MHz. If $G_{TX} > 6$ dBi, then $P_{Out} = 24 - (G_{TX} - 6)$ .                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <input checked="" type="checkbox"/> For the 5.725-5.85 GHz band:                                                                                                                                                                                                                                         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <input type="checkbox"/>                                                                                                                                                                                                                                                                                 | <ul style="list-style-type: none"><li>Point-to-multipoint systems (P2M): the maximum conducted output power (<math>P_{Out}</math>) shall not exceed the lesser of 1 W. If <math>G_{TX} &gt; 6</math> dBi, then <math>P_{Out} = 30 - (G_{TX} - 6)</math>.</li><li>Point-to-point systems (P2P): the maximum conducted output power (<math>P_{Out}</math>) shall not exceed the lesser of 1 W.</li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>LE-LAN Devices</b>                                                                                                                                                                                                                                                                                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <input type="checkbox"/> For the 5.15-5.25 GHz band:                                                                                                                                                                                                                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <input type="checkbox"/>                                                                                                                                                                                                                                                                                 | <ul style="list-style-type: none"><li>For other devices: The maximum e.i.r.p. shall not exceed 200 mW or 10 + 10 log B, dBm, whichever power is less. B is the 99% emission bandwidth in MHz.</li><li>Vehicles devices: The maximum e.i.r.p. shall not exceed 30 mW or 1.76 + 10 log B, dBm, whichever power is less. B is the 99% emission bandwidth in MHz.</li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <input type="checkbox"/> For the 5.25-5.35 GHz band:                                                                                                                                                                                                                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <input type="checkbox"/>                                                                                                                                                                                                                                                                                 | <ul style="list-style-type: none"><li>For other devices: The maximum conducted output power shall not exceed 250 mW or 11 + 10 log 10 B, dBm, and the maximum e.i.r.p. shall not exceed 1.0 W or 17 + 10 log B, dBm, whichever power is less. B is the 99% emission bandwidth in MHz</li><li>Vehicles devices: The maximum e.i.r.p. shall not exceed 30 mW or 1.76 + 10 log B, dBm, whichever power is less. B is the 99% emission bandwidth in MHz.</li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <input type="checkbox"/> For the 5.47-5.6 GHz band and 5.65-5.725 GHz band, the maximum conducted output power shall not exceed 250 mW or 11 + 10 log 10 B, dBm, and the maximum e.i.r.p. shall not exceed 1.0 W or 17 + 10 log B, dBm, whichever power is less. B is the 99% emission bandwidth in MHz. |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <input type="checkbox"/> For the 5.725-5.85 GHz band:                                                                                                                                                                                                                                                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |

|                                                                                                                            |                                                                                                                                                                                                                                                                      |
|----------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                                                                                                            | <ul style="list-style-type: none"> <li>Point-to-multipoint systems (P2M): the maximum conducted output power (<math>P_{Out}</math>) shall not exceed the lesser of 1 W. If <math>G_{TX} &gt; 6</math> dBi, then <math>P_{Out} = 30 - (G_{TX} - 6)</math>.</li> </ul> |
|                                                                                                                            | <ul style="list-style-type: none"> <li>Point-to-point systems (P2P): the maximum conducted output power (<math>P_{Out}</math>) shall not exceed the lesser of 1 W.</li> </ul>                                                                                        |
| $P_{Out}$ = maximum conducted output power in dBm,<br>$G_{TX}$ = the maximum transmitting antenna directional gain in dBi. |                                                                                                                                                                                                                                                                      |

### 3.3.2 Measuring Instruments


Refer a test equipment and calibration data table in this test report.

### 3.3.3 Test Procedures

| Test Method                                                    |                                                                                                                                                                                                                                                                                                                                                                        |
|----------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                                                | Average over on/off periods with duty factor                                                                                                                                                                                                                                                                                                                           |
|                                                                | <input checked="" type="checkbox"/> Refer as FCC KDB 789033 D02, clause E Method SA-2 (spectral trace averaging).                                                                                                                                                                                                                                                      |
|                                                                | <input type="checkbox"/> Refer as FCC KDB 789033 D02, clause E Method SA-2 Alt. (RMS detection with slow sweep speed)                                                                                                                                                                                                                                                  |
|                                                                | Wideband RF power meter and average over on/off periods with duty factor                                                                                                                                                                                                                                                                                               |
|                                                                | <input checked="" type="checkbox"/> Refer as FCC KDB 789033 D02, clause E Method PM-G (using an RF average power meter).                                                                                                                                                                                                                                               |
| <input checked="" type="checkbox"/> For conducted measurement. |                                                                                                                                                                                                                                                                                                                                                                        |
|                                                                | <ul style="list-style-type: none"> <li>If the EUT supports multiple transmit chains using options given below:<br/>Refer as FCC KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them.</li> </ul> |
|                                                                | <ul style="list-style-type: none"> <li>If multiple transmit chains, EIRP calculation could be following as methods:<br/> <math>P_{total} = P_1 + P_2 + \dots + P_n</math><br/>           (calculated in linear unit [mW] and transfer to log unit [dBm])<br/> <math>EIRP_{total} = P_{total} + DG</math> </li> </ul>                                                   |
| <input type="checkbox"/> For radiated measurement.             |                                                                                                                                                                                                                                                                                                                                                                        |
|                                                                | Refer as FCC KDB 789033 D02 clause II A.1.F "Antenna-port Conducted versus Radiated Testing"                                                                                                                                                                                                                                                                           |
|                                                                | Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1GHz.                                                                                                                                                                                                                                                                                                    |
|                                                                | Refer as FCC KDB 412172 D01 clause 2.2 for EIRP calculation.                                                                                                                                                                                                                                                                                                           |

### 3.3.4 Test Setup

For Straddle channel

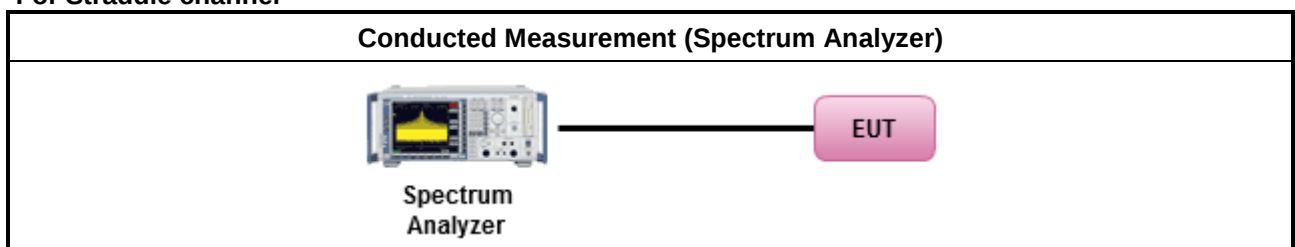

**For Other tests**
**Conducted Measurement (Power Meter)**

**3.3.5 Test Result of Maximum Output Power**

Refer as Appendix C



### 3.4 Power Spectral Density

#### 3.4.1 Limit

| Peak Power Spectral Density Limit                                                                                                                                                                                                                                                               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>UNII Devices</b>                                                                                                                                                                                                                                                                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <input checked="" type="checkbox"/> For the 5.15-5.25 GHz band:                                                                                                                                                                                                                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|                                                                                                                                                                                                                                                                                                 | <ul style="list-style-type: none"><li>Outdoor AP: the peak power spectral density (PPSD) shall not exceed the lesser of 17dBm/MHz. If <math>G_{TX} &gt; 6</math> dBi, then <math>P_{Out} = 17 - (G_{TX} - 6)</math>.</li><li>Indoor AP: the peak power spectral density (PPSD) shall not exceed the lesser of 17dBm/MHz. If <math>G_{TX} &gt; 6</math> dBi, then <math>P_{Out} = 17 - (G_{TX} - 6)</math>.</li><li>Point-to-point AP: the peak power spectral density (PPSD) shall not exceed the lesser of 17dBm/MHz. If <math>G_{TX} &gt; 23</math> dBi, then <math>P_{Out} = 17 - (G_{TX} - 23)</math>.</li><li>Mobile or Portable Client: the peak power spectral density (PPSD) <math>\leq 11</math> dBm/MHz. If <math>G_{TX} &gt; 6</math> dBi, then <math>PPSD = 11 - (G_{TX} - 6)</math>.</li></ul> |
| <input checked="" type="checkbox"/> For the 5.25-5.35 GHz band, the peak power spectral density (PPSD) $\leq 11$ dBm/MHz. If $G_{TX} > 6$ dBi, then $PPSD = 11 - (G_{TX} - 6)$ .                                                                                                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <input checked="" type="checkbox"/> For the 5.47-5.725 GHz band, the peak power spectral density (PPSD) $\leq 11$ dBm/MHz. If $G_{TX} > 6$ dBi, then $PPSD = 11 - (G_{TX} - 6)$ .                                                                                                               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <input checked="" type="checkbox"/> For the 5.725-5.85 GHz band:                                                                                                                                                                                                                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|                                                                                                                                                                                                                                                                                                 | <ul style="list-style-type: none"><li>Point-to-multipoint systems (P2M): the peak power spectral density (PPSD) <math>\leq 30</math> dBm/500kHz. If <math>G_{TX} &gt; 6</math> dBi, then <math>PPSD = 30 - (G_{TX} - 6)</math>.</li><li>Point-to-point systems (P2P): the peak power spectral density (PPSD) <math>\leq 30</math> dBm/500kHz.</li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>LE-LAN Devices</b>                                                                                                                                                                                                                                                                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <input type="checkbox"/> For the 5.15-5.25 GHz band, the e.i.r.p. peak power spectral density (PPSD) $\leq 10$ dBm/MHz.                                                                                                                                                                         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <input type="checkbox"/> For the 5.25-5.35 GHz band, the peak power spectral density (PPSD) $\leq 11$ dBm/MHz.                                                                                                                                                                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|                                                                                                                                                                                                                                                                                                 | <ul style="list-style-type: none"><li>e.i.r.p. greater than 200 mW shall comply with the following e.i.r.p. at different elevations, where <math>\theta</math> is the angle above the local horizontal plane (of the Earth) as shown below:<br/>-13 dBW/MHz for <math>0^\circ \leq \theta &lt; 8^\circ</math> ; -13 - 0.716 (<math>\theta</math>-8) dBW/MHz for <math>8^\circ \leq \theta &lt; 40^\circ</math><br/>-35.9 - 1.22 (<math>\theta</math>-40) dBW/MHz for <math>40^\circ \leq \theta \leq 45^\circ</math> ; -42 dBW/MHz for <math>\theta &gt; 45^\circ</math></li></ul>                                                                                                                                                                                                                          |
| <input type="checkbox"/> For the 5.47-5.6 GHz band and 5.65-5.725 GHz band, the peak power spectral density (PPSD) $\leq 11$ dBm/MHz.                                                                                                                                                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <input type="checkbox"/> For the 5.725-5.85 GHz band:                                                                                                                                                                                                                                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|                                                                                                                                                                                                                                                                                                 | <ul style="list-style-type: none"><li>Point-to-multipoint systems (P2M): the peak power spectral density (PPSD) <math>\leq 30</math> dBm/500kHz. If <math>G_{TX} &gt; 6</math> dBi, then <math>PPSD = 30 - (G_{TX} - 6)</math>.</li><li>Point-to-point systems (P2P): the peak power spectral density (PPSD) <math>\leq 30</math> dBm/500kHz.</li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>PPSD</b> = peak power spectral density that he same method as used to determine the conducted output power shall be used to determine the power spectral density. And power spectral density in dBm/MHz<br><b>G<sub>TX</sub></b> = the maximum transmitting antenna directional gain in dBi. |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |

#### 3.4.2 Measuring Instruments


Refer a test equipment and calibration data table in this test report.

**3.4.3 Test Procedures**

| Test Method                                                                                                                                                                                                                                                                                                                                                                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"><li>Peak power spectral density procedures that the same method as used to determine the conducted output power shall be used to determine the peak power spectral density and use the peak search function on the spectrum analyzer to find the peak of the spectrum. For the peak power spectral density shall be measured using below options:</li></ul> |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <input type="checkbox"/>                                                                                                                                                                                                                                                                                                                                                                      | Refer as FCC KDB 789033 D02, F)5) power spectral density can be measured using resolution bandwidths < 1 MHz provided that the results are integrated over 1 MHz bandwidth                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| [duty cycle ≥ 98% or external video / power trigger]                                                                                                                                                                                                                                                                                                                                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <input checked="" type="checkbox"/>                                                                                                                                                                                                                                                                                                                                                           | Refer as FCC KDB 789033 D02, clause E Method SA-1 (spectral trace averaging).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <input type="checkbox"/>                                                                                                                                                                                                                                                                                                                                                                      | Refer as FCC KDB 789033 D02, clause E Method SA-1 Alt. (RMS detection with slow sweep speed)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| duty cycle < 98% and average over on/off periods with duty factor                                                                                                                                                                                                                                                                                                                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <input checked="" type="checkbox"/>                                                                                                                                                                                                                                                                                                                                                           | Refer as FCC KDB 789033 D02, clause E Method SA-2 (spectral trace averaging).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <input type="checkbox"/>                                                                                                                                                                                                                                                                                                                                                                      | Refer as FCC KDB 789033 D02, clause E Method SA-2 Alt. (RMS detection with slow sweep speed)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <input checked="" type="checkbox"/> For conducted measurement.                                                                                                                                                                                                                                                                                                                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <ul style="list-style-type: none"><li>If the EUT supports multiple transmit chains using options given below:</li></ul>                                                                                                                                                                                                                                                                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <input checked="" type="checkbox"/>                                                                                                                                                                                                                                                                                                                                                           | Option 1: Measure and sum the spectra across the outputs. Refer as FCC KDB 662911, In-band power spectral density (PSD). Sample all transmit ports simultaneously using a spectrum analyzer for each transmit port. Where the trace bin-by-bin of each transmit port summing can be performed. (i.e., in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3, and so on up to the NTX output to obtain the value for the first frequency bin of the summed spectrum.). Add up the amplitude (power) values for the different transmit chains and use this as the new data trace. |
| <input type="checkbox"/>                                                                                                                                                                                                                                                                                                                                                                      | Option 2: Measure and sum spectral maxima across the outputs. With this technique, spectra are measured at each output of the device at the required resolution bandwidth. The maximum value (peak) of each spectrum is determined. These maximum values are then summed mathematically in linear power units across the outputs. These operations shall be performed separately over frequency spans that have different out-of-band or spurious emission limits,                                                                                                                                                                                                         |
| <input type="checkbox"/>                                                                                                                                                                                                                                                                                                                                                                      | Option 3: Measure and add 10 log(N) dB, where N is the number of transmit chains. Refer as FCC KDB 662911, In-band power spectral density (PSD). Performed at each transmit chains and each transmit chains shall be compared with the limit have been reduced with 10 log(N). Or each transmit chains shall be add 10 log(N) to compared with the limit.                                                                                                                                                                                                                                                                                                                  |
| <ul style="list-style-type: none"><li>If multiple transmit chains, EIRP PPSD calculation could be following as methods:<br/><math>PPSD_{total} = PPSD_1 + PPSD_2 + \dots + PPSD_n</math><br/>(calculated in linear unit [mW] and transfer to log unit [dBm])<br/><math>EIRP_{total} = PPSD_{total} + DG</math></li></ul>                                                                      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <input type="checkbox"/> For radiated measurement.                                                                                                                                                                                                                                                                                                                                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <ul style="list-style-type: none"><li>Refer as FCC KDB 789033 D02 clause II A.1.F "Antenna-port Conducted versus Radiated Testing"</li><li>Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1GHz.</li></ul>                                                                                                                                                                      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |

| Test Method |                                                                                                                |
|-------------|----------------------------------------------------------------------------------------------------------------|
|             | <ul style="list-style-type: none"> <li>Refer as FCC KDB 412172 D01 clause 2.2 for EIRP calculation.</li> </ul> |

### 3.4.4 Test Setup

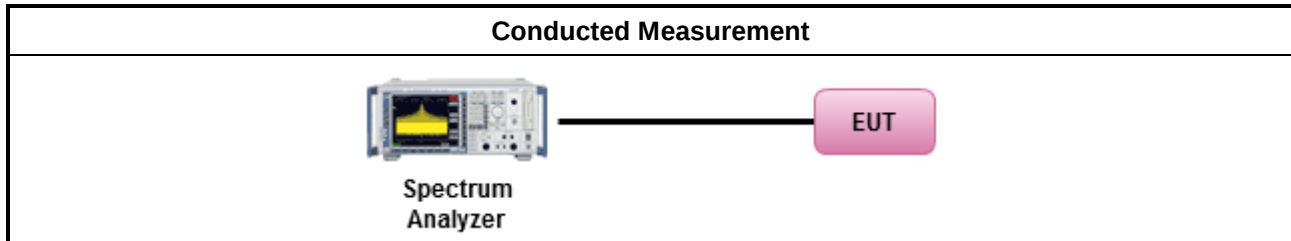

### 3.4.5 Test Result of Power Spectral Density

Refer as Appendix D



### 3.5 Unwanted Emissions

#### 3.5.1 Transmitter Unwanted Emissions Limit

| Unwanted emissions below 1 GHz and restricted band emissions above 1GHz limit |                       |                         |                      |
|-------------------------------------------------------------------------------|-----------------------|-------------------------|----------------------|
| Frequency Range (MHz)                                                         | Field Strength (uV/m) | Field Strength (dBuV/m) | Measure Distance (m) |
| 0.009~0.490                                                                   | 2400/F(kHz)           | 48.5 - 13.8             | 300                  |
| 0.490~1.705                                                                   | 24000/F(kHz)          | 33.8 - 23               | 30                   |
| 1.705~30.0                                                                    | 30                    | 29                      | 30                   |
| 30~88                                                                         | 100                   | 40                      | 3                    |
| 88~216                                                                        | 150                   | 43.5                    | 3                    |
| 216~960                                                                       | 200                   | 46                      | 3                    |
| Above 960                                                                     | 500                   | 54                      | 3                    |

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Note 3: Using the distance of 1m during the test for above 18 GHz, and the test value to correct for the distance factor at 3m.

| Un-restricted band emissions above 1GHz Limit        |                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Operating Band                                       | Limit                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <input checked="" type="checkbox"/> 5.15 - 5.25 GHz  | e.i.r.p. -27 dBm [68.2 dBuV/m@3m]                                                                                                                                                                                                                                                                                                                                                                                               |
| <input checked="" type="checkbox"/> 5.25 - 5.35 GHz  | e.i.r.p. -27 dBm [68.2 dBuV/m@3m]                                                                                                                                                                                                                                                                                                                                                                                               |
| <input checked="" type="checkbox"/> 5.47 - 5.725 GHz | e.i.r.p. -27 dBm [68.2 dBuV/m@3m]                                                                                                                                                                                                                                                                                                                                                                                               |
| <input checked="" type="checkbox"/> 5.725 - 5.85 GHz | all emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge. |

Note 1: Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of



linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).


### 3.5.2 Measuring Instruments


Refer a test equipment and calibration data table in this test report.

### 3.5.3 Test Procedures

| Test Method                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                                                                                                                                                  |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"><li>Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 m for frequencies above 30 MHz, unless it can be further demonstrated that measurements at a distance of 30 m or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).</li></ul> |                                                                                                                                                  |
| <ul style="list-style-type: none"><li>The average emission levels shall be measured in [duty cycle <math>\geq</math> 98 or duty factor].</li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                                                                                                                                                  |
| <ul style="list-style-type: none"><li>For the transmitter unwanted emissions shall be measured using following options below:</li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                                                                                                                                                  |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | <ul style="list-style-type: none"><li>Refer as FCC KDB 789033 D02, clause G)2) for unwanted emissions into non-restricted bands.</li></ul>       |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | <ul style="list-style-type: none"><li>Refer as FCC KDB 789033 D02, clause G)1) for unwanted emissions into restricted bands.</li></ul>           |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | <input type="checkbox"/> Refer as FCC KDB 789033 D02, G)6) Method AD (Trace Averaging).                                                          |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | <input checked="" type="checkbox"/> Refer as FCC KDB 789033 D02, G)6) Method VB (Reduced VBW).                                                   |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | <input type="checkbox"/> Refer as ANSI C63.10, clause 11.12.2.5.3 (Reduced VBW). VBW $\geq$ 1/T, where T is pulse time.                          |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | <input type="checkbox"/> Refer as ANSI C63.10, clause 7.5 average value of pulsed emissions.                                                     |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | <input checked="" type="checkbox"/> Refer as FCC KDB 789033 D02, clause G)5) measurement procedure peak limit.                                   |
| <input type="checkbox"/> Refer as ANSI C63.10, clause 4.1.4.2.2 measurement procedure peak limit.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                                                                                                                                                  |
| <ul style="list-style-type: none"><li>For radiated measurement.</li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                                                                                                                                                  |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | <ul style="list-style-type: none"><li>Refer as ANSI C63.10, clause 6.4 for radiated emissions below 30 MHz and test distance is 3m.</li></ul>    |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | <ul style="list-style-type: none"><li>Refer as ANSI C63.10, clause 6.5 for radiated emissions 30 MHz to 1 GHz and test distance is 3m.</li></ul> |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | <ul style="list-style-type: none"><li>Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1GHz.</li></ul>                              |
| <ul style="list-style-type: none"><li>The any unwanted emissions level shall not exceed the fundamental emission level.</li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                                                                                                                                                  |
| <ul style="list-style-type: none"><li>All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.</li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                                                                                                                                                  |

### 3.5.4 Test Setup

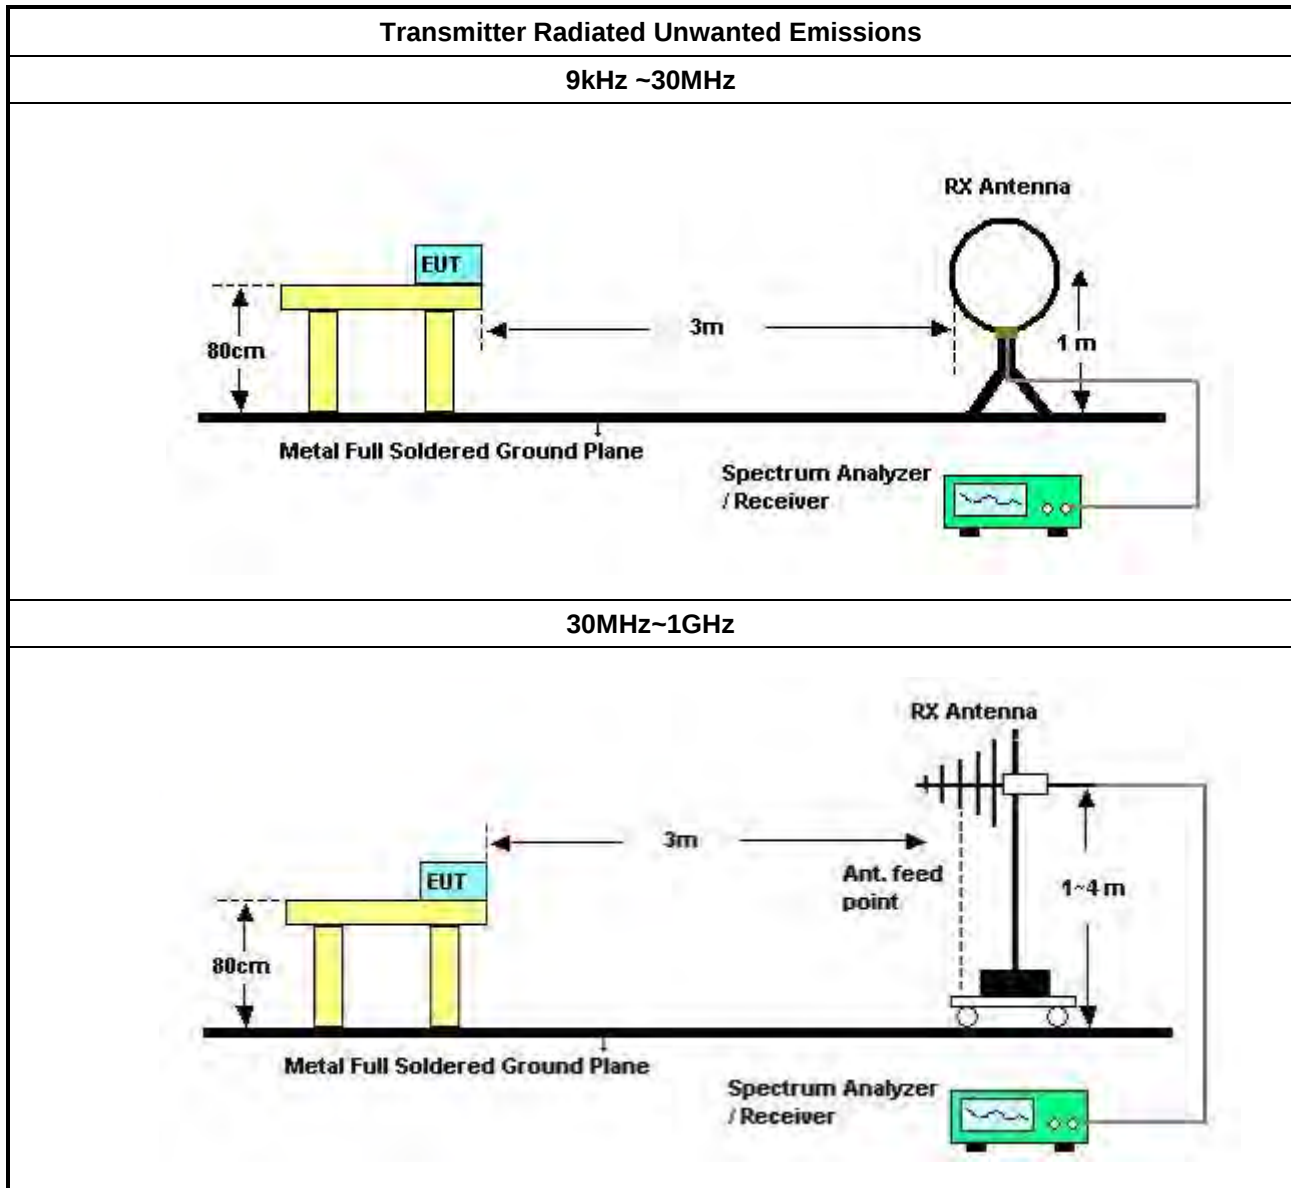

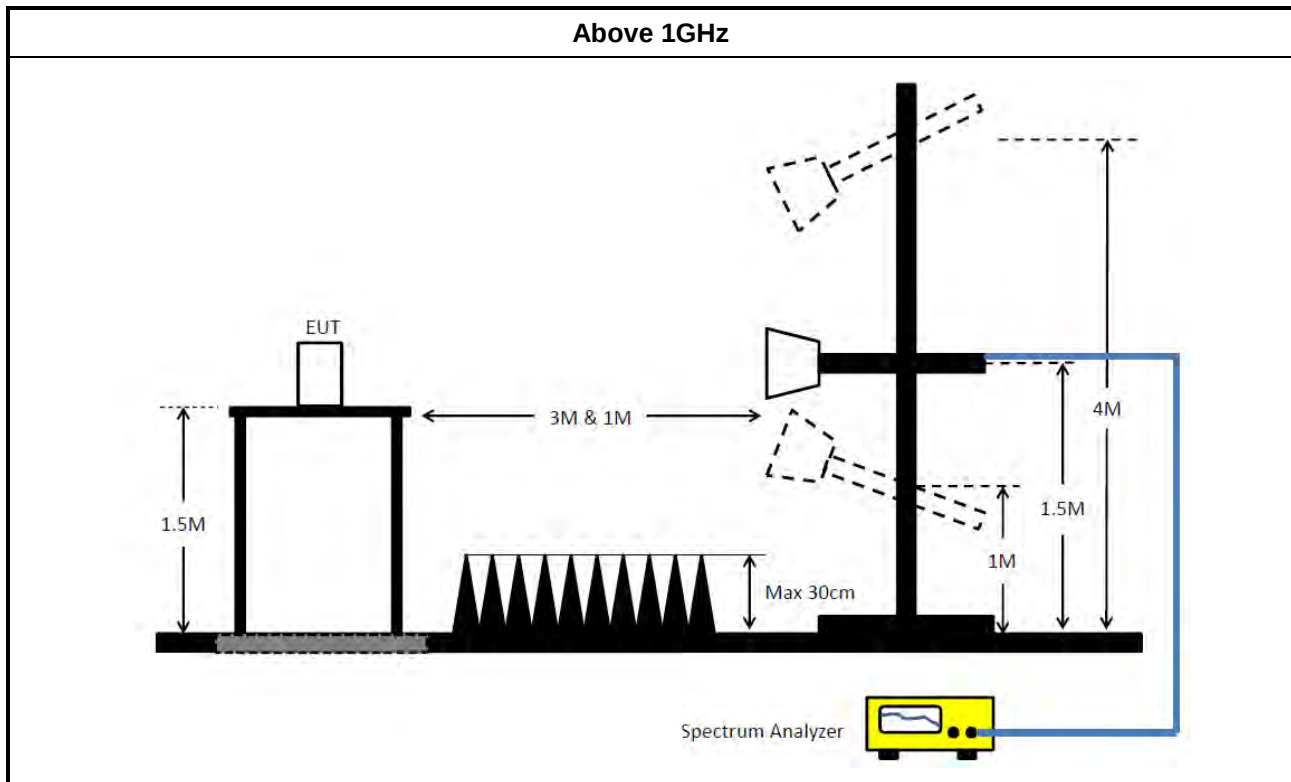

### 3.5.5 Measurement Results Calculation

The measured Level is calculated using:

Corrected Reading: Antenna factor (AF) + Cable loss (CL) + Read level (Raw) - Preamp factor (PA)(if applicable) = Level.

### 3.5.6 Transmitter Unwanted Emissions (Below 30MHz)

There is a comparison data of both open-field test site and alternative test site - semi-Anechoic chamber according to KDB414788 Radiated Test Site, and the result came out very similar.

All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

The radiated emissions were investigated from 9 kHz or the lowest frequency generated within the device, up to the 10th harmonic or 40 GHz, whichever is appropriate.

### 3.5.7 Test Result of Transmitter Unwanted Emissions

Refer as Appendix E



## 4 Test Equipment and Calibration Data

| Instrument                         | Brand         | Model No.         | Serial No.       | Characteristics  | Calibration Date | Calibration Due Date | Remark                |
|------------------------------------|---------------|-------------------|------------------|------------------|------------------|----------------------|-----------------------|
| EMI Receiver                       | Agilent       | N9038A            | My52260123       | 9kHz ~ 8.4GHz    | Mar. 01, 2024    | Feb. 28, 2025        | Conduction (CO01-CB)  |
| LISN                               | F.C.C.        | FCC-LISN-5 0-16-2 | 04083            | 150kHz ~ 100MHz  | Feb. 19, 2024    | Feb. 18, 2025        | Conduction (CO01-CB)  |
| LISN                               | Schwarzbeck   | NSLK 8127         | 8127647          | 9kHz ~ 30MHz     | Apr. 24, 2024    | Apr. 23, 2025        | Conduction (CO01-CB)  |
| Pulse Limiter                      | Rohde&Schwarz | ESH3-Z2           | 100430           | 9kHz ~ 30MHz     | Feb. 08, 2024    | Feb. 07, 2025        | Conduction (CO01-CB)  |
| COND Cable                         | Woken         | Cable             | Low cable-CO01   | 9kHz ~ 30MHz     | Oct. 17, 2023    | Oct. 16, 2024        | Conduction (CO01-CB)  |
| Test Software                      | SPORTON       | SENSE-EMI         | V5.11            | 150kHz-30MHz     | N.C.R.           | N.C.R.               | Conduction (CO01-CB)  |
| Loop Antenna                       | Teseq         | HLA 6121          | 65417            | 9kHz - 30 MHz    | Oct. 13, 2023    | Oct. 12, 2024        | Radiation (03CH06-CB) |
| 3m Semi Anechoic Chamber NSA       | TDK           | SAC-3M            | 03CH06-CB        | 30 MHz ~ 1 GHz   | Aug. 02, 2024    | Aug. 01, 2025        | Radiation (03CH06-CB) |
| Bilog Antenna with 6 dB attenuator | TESEQ & EMCI  | CBL6112D & N-6-06 | 37878 & AT-N0606 | 20MHz ~ 2GHz     | Jul. 29, 2024    | Jul. 28, 2025        | Radiation (03CH06-CB) |
| Pre-Amplifier                      | Agilent       | 310N              | 187290           | 0.1MHz ~ 1GHz    | Nov. 03, 2023    | Nov. 02, 2024        | Radiation (03CH06-CB) |
| Signal Analyzer                    | R&S           | FSV40             | 101904           | 9kHz ~ 40GHz     | Apr. 26, 2024    | Apr. 25, 2025        | Radiation (03CH06-CB) |
| EMI Test Receiver                  | R&S           | ESR7              | 102172           | 9kHz ~ 7GHz      | Oct. 20, 2023    | Oct. 19, 2024        | Radiation (03CH06-CB) |
| RF Cable-low                       | Woken         | RG402             | Low Cable-24+68  | 30MHz~1GHz       | Oct. 02, 2023    | Oct. 01, 2024        | Radiation (03CH06-CB) |
| Test Software                      | SPORTON       | SENSE-EMI         | V5.11.8          | 30MHz-40GHz      | N.C.R.           | N.C.R.               | Radiation (03CH06-CB) |
| 3m Semi Anechoic Chamber VSWR      | TDK           | SAC-3M            | 03CH04-CB        | 1GHz ~18GHz 3m   | Feb. 22, 2024    | Feb. 21, 2025        | Radiation (03CH04-CB) |
| Horn Antenna                       | ETS-Lindgren  | 3115              | 00143147         | 750MHz~18GHz     | Oct. 04, 2023    | Oct. 03, 2024        | Radiation (03CH04-CB) |
| Horn Antenna                       | Schwarzbeck   | BBHA 9170         | BBHA9170252      | 15GHz ~ 40GHz    | Sep. 04, 2023    | Sep. 03, 2024        | Radiation (03CH04-CB) |
| Pre-Amplifier                      | Agilent       | 83017A            | MY53270063       | 0.5GHz ~ 26.5GHz | Jun. 30, 2023    | Jun. 29, 2024        | Radiation (03CH04-CB) |
| Pre-Amplifier                      | SGH           | SGH184            | 20221107-3       | 18GHz ~ 40GHz    | Nov. 24, 2023    | Nov. 23, 2024        | Radiation (03CH04-CB) |
| Spectrum Analyzer                  | R&S           | FSP40             | 100142           | 9kHz~40GHz       | Mar. 19, 2024    | Mar. 18, 2025        | Radiation (03CH04-CB) |



| Instrument        | Brand   | Model No. | Serial No.       | Characteristics | Calibration Date | Calibration Due Date | Remark                |
|-------------------|---------|-----------|------------------|-----------------|------------------|----------------------|-----------------------|
| RF Cable-high     | Woken   | RG402     | High Cable-21    | 1GHz - 18GHz    | Oct. 02, 2023    | Oct. 01, 2024        | Radiation (03CH04-CB) |
| RF Cable-high     | Woken   | RG402     | High Cable-21+67 | 1GHz - 18GHz    | Oct. 02, 2023    | Oct. 01, 2024        | Radiation (03CH04-CB) |
| High Cable        | Woken   | WCA0929M  | 40G#5+6          | 1GHz ~ 40 GHz   | Jan. 11, 2024    | Jan. 10, 2025        | Radiation (03CH04-CB) |
| Test Software     | SPORTON | SENSE     | V5.10            | -               | N.C.R.           | N.C.R.               | Radiation (03CH04-CB) |
| Spectrum analyzer | R&S     | FSV40     | 101027           | 9kHz~40GHz      | Aug. 14, 2023    | Aug. 13, 2024        | Conducted (TH02-CB)   |
| Power Sensor      | Anritsu | MA2411B   | 1126203          | 300MHz~40GHz    | Oct. 19, 2023    | Oct. 18, 2024        | Conducted (TH02-CB)   |
| Power Meter       | Anritsu | ML2495A   | 1210004          | 300MHz~40GHz    | Oct. 19, 2023    | Oct. 18, 2024        | Conducted (TH02-CB)   |
| RF Cable-high     | Woken   | RG402     | High Cable-01    | 1 GHz – 18 GHz  | Oct. 02, 2023    | Oct. 01, 2024        | Conducted (TH02-CB)   |
| RF Cable-high     | Woken   | RG402     | High Cable-02    | 1 GHz – 18 GHz  | Oct. 02, 2023    | Oct. 01, 2024        | Conducted (TH02-CB)   |
| RF Cable-high     | Woken   | RG402     | High Cable-03    | 1 GHz – 18 GHz  | Oct. 02, 2023    | Oct. 01, 2024        | Conducted (TH02-CB)   |
| RF Cable-high     | Woken   | RG402     | High Cable-04    | 1 GHz – 18 GHz  | Oct. 02, 2023    | Oct. 01, 2024        | Conducted (TH02-CB)   |
| RF Cable-high     | Woken   | RG402     | High Cable-05    | 1 GHz – 18 GHz  | Oct. 02, 2023    | Oct. 01, 2024        | Conducted (TH02-CB)   |
| Switch            | SPTCB   | SP-SWI    | SWI-02           | 1 –26.5 GHz     | Oct. 03, 2023    | Oct. 02, 2024        | Conducted (TH02-CB)   |
| Test Software     | SPORTON | SENSE     | V5.10            | -               | N.C.R.           | N.C.R.               | Conducted (TH02-CB)   |

Note: Calibration Interval of instruments listed above is one year.

NCR means Non-Calibration required.




## Conducted Emissions at Powerline

## Appendix A

### Summary


| Mode   | Result | Type | Freq<br>(Hz) | Level<br>(dBuV) | Limit<br>(dBuV) | Margin<br>(dB) | Condition |
|--------|--------|------|--------------|-----------------|-----------------|----------------|-----------|
| Mode 3 | Pass   | AV   | 2.666M       | 35.47           | 46.00           | -10.53         | Neutral   |

### Mode 3

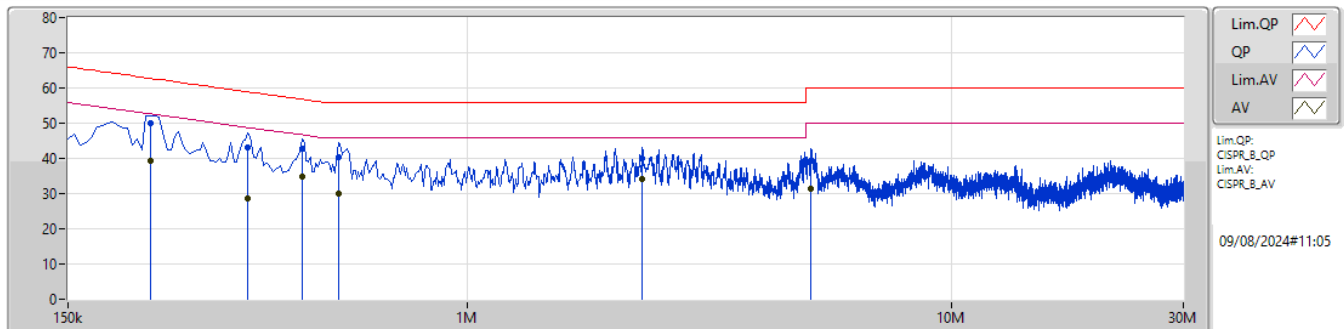

| Type | Freq<br>(Hz) | Level<br>(dBuV) | Limit<br>(dBuV) | Margin<br>(dB) | Factor<br>(dB) | Condition | Comment | Raw<br>(dBuV) | LISN<br>(dB) | CL<br>(dB) | AT<br>(dB) |  |  |  |  |  |  |
|------|--------------|-----------------|-----------------|----------------|----------------|-----------|---------|---------------|--------------|------------|------------|--|--|--|--|--|--|
| QP   | 222k         | 49.88           | 62.75           | -12.87         | 9.92           | Line      | -       | 39.96         | 0.04         | 0.02       | 9.86       |  |  |  |  |  |  |
| AV   | 222k         | 39.37           | 52.75           | -13.38         | 9.92           | Line      | -       | 29.45         | 0.04         | 0.02       | 9.86       |  |  |  |  |  |  |
| QP   | 352.5k       | 43.04           | 58.91           | -15.87         | 9.95           | Line      | -       | 33.09         | 0.05         | 0.02       | 9.88       |  |  |  |  |  |  |
| AV   | 352.5k       | 28.75           | 48.91           | -20.16         | 9.95           | Line      | -       | 18.80         | 0.05         | 0.02       | 9.88       |  |  |  |  |  |  |
| QP   | 456k         | 42.62           | 56.76           | -14.14         | 9.96           | Line      | -       | 32.66         | 0.05         | 0.02       | 9.89       |  |  |  |  |  |  |
| AV   | 456k         | 34.96           | 46.76           | -11.80         | 9.96           | Line      | "Worst" | 25.00         | 0.05         | 0.02       | 9.89       |  |  |  |  |  |  |
| QP   | 541.5k       | 40.27           | 56.00           | -15.73         | 9.98           | Line      | -       | 30.29         | 0.06         | 0.02       | 9.90       |  |  |  |  |  |  |
| AV   | 541.5k       | 30.03           | 46.00           | -15.97         | 9.98           | Line      | -       | 20.05         | 0.06         | 0.02       | 9.90       |  |  |  |  |  |  |
| QP   | 2.297M       | 39.86           | 56.00           | -16.14         | 10.07          | Line      | -       | 29.79         | 0.10         | 0.08       | 9.89       |  |  |  |  |  |  |
| AV   | 2.297M       | 34.03           | 46.00           | -11.97         | 10.07          | Line      | -       | 23.96         | 0.10         | 0.08       | 9.89       |  |  |  |  |  |  |
| QP   | 5.123M       | 39.46           | 60.00           | -20.54         | 10.20          | Line      | -       | 29.26         | 0.16         | 0.14       | 9.90       |  |  |  |  |  |  |
| AV   | 5.123M       | 31.39           | 50.00           | -18.61         | 10.20          | Line      | -       | 21.19         | 0.16         | 0.14       | 9.90       |  |  |  |  |  |  |

### Mode 3

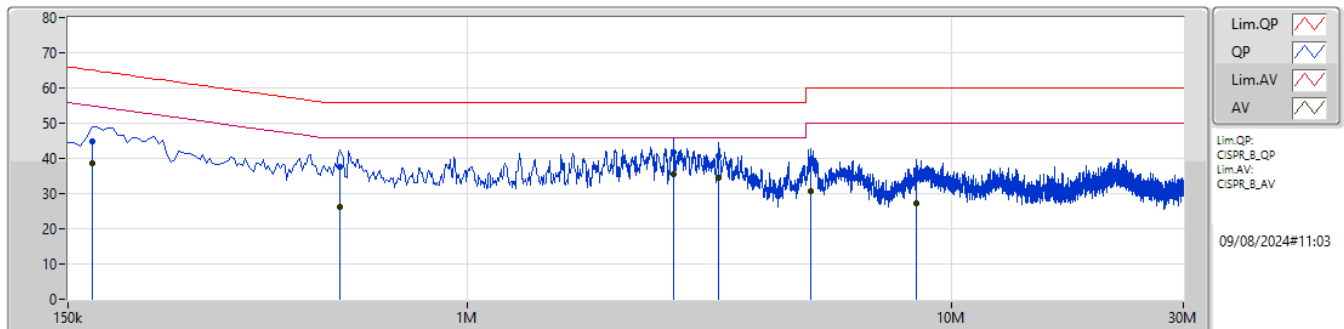

| Type | Freq<br>(Hz) | Level<br>(dBuV) | Limit<br>(dBuV) | Margin<br>(dB) | Factor<br>(dB) | Condition | Comment | Raw<br>(dBuV) | LISN<br>(dB) | CL<br>(dB) | AT<br>(dB) |  |  |  |  |  |  |
|------|--------------|-----------------|-----------------|----------------|----------------|-----------|---------|---------------|--------------|------------|------------|--|--|--|--|--|--|
| QP   | 168k         | 44.75           | 65.06           | -20.31         | 9.94           | Neutral   | -       | 34.81         | 0.06         | 0.02       | 9.86       |  |  |  |  |  |  |
| AV   | 168k         | 38.65           | 55.06           | -16.41         | 9.94           | Neutral   | -       | 28.71         | 0.06         | 0.02       | 9.86       |  |  |  |  |  |  |
| QP   | 546k         | 37.71           | 56.00           | -18.29         | 9.99           | Neutral   | -       | 27.72         | 0.07         | 0.02       | 9.90       |  |  |  |  |  |  |
| AV   | 546k         | 26.19           | 46.00           | -19.81         | 9.99           | Neutral   | -       | 16.20         | 0.07         | 0.02       | 9.90       |  |  |  |  |  |  |
| QP   | 2.666M       | 41.76           | 56.00           | -14.24         | 10.10          | Neutral   | -       | 31.66         | 0.11         | 0.10       | 9.89       |  |  |  |  |  |  |
| AV   | 2.666M       | 35.47           | 46.00           | -10.53         | 10.10          | Neutral   | "Worst" | 25.37         | 0.11         | 0.10       | 9.89       |  |  |  |  |  |  |
| QP   | 3.3M         | 40.58           | 56.00           | -15.42         | 10.14          | Neutral   | -       | 30.44         | 0.12         | 0.12       | 9.90       |  |  |  |  |  |  |
| AV   | 3.3M         | 34.36           | 46.00           | -11.64         | 10.14          | Neutral   | -       | 24.22         | 0.12         | 0.12       | 9.90       |  |  |  |  |  |  |
| QP   | 5.123M       | 38.53           | 60.00           | -21.47         | 10.20          | Neutral   | -       | 28.33         | 0.16         | 0.14       | 9.90       |  |  |  |  |  |  |
| AV   | 5.123M       | 30.70           | 50.00           | -19.30         | 10.20          | Neutral   | -       | 20.50         | 0.16         | 0.14       | 9.90       |  |  |  |  |  |  |
| QP   | 8.444M       | 34.18           | 60.00           | -25.82         | 10.27          | Neutral   | -       | 23.91         | 0.22         | 0.14       | 9.91       |  |  |  |  |  |  |
| AV   | 8.444M       | 27.15           | 50.00           | -22.85         | 10.27          | Neutral   | -       | 16.88         | 0.22         | 0.14       | 9.91       |  |  |  |  |  |  |

**Summary**

| Mode                           | Max-N dB<br>(Hz) | Max-OBW<br>(Hz) | ITU-Code | Min-N dB<br>(Hz) | Min-OBW<br>(Hz) |
|--------------------------------|------------------|-----------------|----------|------------------|-----------------|
| 5.15-5.25GHz                   | -                | -               | -        | -                | -               |
| 802.11a_Nss1,(6Mbps)_2TX       | 29.59M           | 17.027M         | 17M0D1D  | 19.25M           | 16.268M         |
| 802.11ax HEW20_Nss1,(MCS0)_2TX | 38.61M           | 23.554M         | 23M6D1D  | 20.9M            | 18.881M         |
| 802.11ax HEW40_Nss1,(MCS0)_2TX | 53.9M            | 37.729M         | 37M7D1D  | 39.49M           | 37.578M         |
| 802.11ax HEW80_Nss1,(MCS0)_2TX | 81.62M           | 77.225M         | 77M2D1D  | 80.52M           | 77.188M         |
| 5.25-5.35GHz                   | -                | -               | -        | -                | -               |
| 802.11a_Nss1,(6Mbps)_2TX       | 29.48M           | 17.619M         | 17M6D1D  | 20.075M          | 16.327M         |
| 802.11ax HEW20_Nss1,(MCS0)_2TX | 36.74M           | 22.216M         | 22M2D1D  | 20.79M           | 18.901M         |
| 802.11ax HEW40_Nss1,(MCS0)_2TX | 76.67M           | 38.764M         | 38M8D1D  | 39.71M           | 37.453M         |
| 802.11ax HEW80_Nss1,(MCS0)_2TX | 81.84M           | 77.506M         | 77M5D1D  | 81.18M           | 77.174M         |
| 5.47-5.725GHz                  | -                | -               | -        | -                | -               |
| 802.11a_Nss1,(6Mbps)_2TX       | 28.82M           | 18.244M         | 18M2D1D  | 14.64M           | 13.063M         |
| 802.11ax HEW20_Nss1,(MCS0)_2TX | 43.285M          | 26.737M         | 26M7D1D  | 19.335M          | 14.566M         |
| 802.11ax HEW40_Nss1,(MCS0)_2TX | 77.55M           | 38.587M         | 38M6D1D  | 23.87M           | 17.431M         |
| 802.11ax HEW80_Nss1,(MCS0)_2TX | 99M              | 77.432M         | 77M4D1D  | 75.15M           | 73.329M         |
| 5.725-5.85GHz                  | -                | -               | -        | -                | -               |
| 802.11a_Nss1,(6Mbps)_2TX       | 15.73M           | 33.583M         | 33M6D1D  | 2.6M             | 9.067M          |
| 802.11ax HEW20_Nss1,(MCS0)_2TX | 18.975M          | 32.705M         | 32M7D1D  | 3.64M            | 13.461M         |
| 802.11ax HEW40_Nss1,(MCS0)_2TX | 37.51M           | 62.344M         | 62M3D1D  | 2.54M            | 15.043M         |
| 802.11ax HEW80_Nss1,(MCS0)_2TX | 77.22M           | 77.634M         | 77M6D1D  | 3.24M            | 30.725M         |

Max-N dB = Maximum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;  
 Max-OBW = Maximum 99% occupied bandwidth;  
 Min-N dB = Minimum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;  
 Min-OBW = Minimum 99% occupied bandwidth



**Result**

| Mode                           | Result | Limit (Hz) | Port 1-N dB (Hz) | Port 1-OBW (Hz) | Port 2-N dB (Hz) | Port 2-OBW (Hz) |
|--------------------------------|--------|------------|------------------|-----------------|------------------|-----------------|
| 802.11a_Nss1,(6Mbps)_2TX       | -      | -          | -                | -               | -                | -               |
| 5180MHz                        | Pass   | Inf        | 19.525M          | 16.58M          | 19.25M           | 16.268M         |
| 5200MHz                        | Pass   | Inf        | 23.485M          | 17.027M         | 21.56M           | 16.467M         |
| 5240MHz                        | Pass   | Inf        | 29.59M           | 16.98M          | 23.705M          | 16.394M         |
| 5260MHz                        | Pass   | Inf        | 29.48M           | 17.619M         | 20.845M          | 16.567M         |
| 5300MHz                        | Pass   | Inf        | 26.73M           | 17.083M         | 21.34M           | 16.418M         |
| 5320MHz                        | Pass   | Inf        | 21.01M           | 16.609M         | 20.075M          | 16.327M         |
| 5500MHz                        | Pass   | Inf        | 19.8M            | 16.323M         | 19.47M           | 16.333M         |
| 5580MHz                        | Pass   | Inf        | 28.82M           | 18.244M         | 22.935M          | 16.415M         |
| 5700MHz                        | Pass   | Inf        | 19.635M          | 16.36M          | 19.69M           | 16.335M         |
| 5720MHz Straddle 5.47-5.725GHz | Pass   | Inf        | 19.77M           | 13.468M         | 14.64M           | 13.063M         |
| 5720MHz Straddle 5.725-5.85GHz | Pass   | 500k       | 3.26M            | 12.852M         | 2.6M             | 9.067M          |
| 5745MHz                        | Pass   | 500k       | 14.85M           | 33.583M         | 15.73M           | 31.827M         |
| 5785MHz                        | Pass   | 500k       | 10.34M           | 32.899M         | 15.29M           | 33.426M         |
| 5825MHz                        | Pass   | 500k       | 15.675M          | 30.534M         | 15.675M          | 31.338M         |
| 802.11ax HEW20_Nss1,(MCS0)_2TX | -      | -          | -                | -               | -                | -               |
| 5180MHz                        | Pass   | Inf        | 20.9M            | 18.881M         | 21.065M          | 18.894M         |
| 5200MHz                        | Pass   | Inf        | 29.37M           | 19.158M         | 24.86M           | 19.03M          |
| 5240MHz                        | Pass   | Inf        | 38.61M           | 21.9M           | 35.97M           | 23.554M         |
| 5260MHz                        | Pass   | Inf        | 36.74M           | 22.216M         | 31.955M          | 20.587M         |
| 5300MHz                        | Pass   | Inf        | 32.45M           | 19.247M         | 28.82M           | 19.036M         |
| 5320MHz                        | Pass   | Inf        | 21.78M           | 19.009M         | 20.79M           | 18.901M         |
| 5500MHz                        | Pass   | Inf        | 21.01M           | 18.912M         | 20.68M           | 18.88M          |
| 5580MHz                        | Pass   | Inf        | 43.285M          | 26.737M         | 28.71M           | 19.134M         |
| 5700MHz                        | Pass   | Inf        | 20.9M            | 18.871M         | 20.955M          | 18.918M         |
| 5720MHz Straddle 5.47-5.725GHz | Pass   | Inf        | 30M              | 26.139M         | 19.335M          | 14.566M         |
| 5720MHz Straddle 5.725-5.85GHz | Pass   | 500k       | 5.9M             | 32.705M         | 3.64M            | 13.461M         |
| 5745MHz                        | Pass   | 500k       | 18.92M           | 30.316M         | 18.865M          | 25.248M         |
| 5785MHz                        | Pass   | 500k       | 18.975M          | 30.135M         | 13.09M           | 26.716M         |
| 5825MHz                        | Pass   | 500k       | 18.92M           | 30.522M         | 16.335M          | 24.983M         |
| 802.11ax HEW40_Nss1,(MCS0)_2TX | -      | -          | -                | -               | -                | -               |
| 5190MHz                        | Pass   | Inf        | 40.04M           | 37.632M         | 39.49M           | 37.578M         |
| 5230MHz                        | Pass   | Inf        | 53.9M            | 37.729M         | 48.73M           | 37.676M         |
| 5270MHz                        | Pass   | Inf        | 76.67M           | 38.764M         | 46.86M           | 37.791M         |
| 5310MHz                        | Pass   | Inf        | 39.82M           | 37.726M         | 39.71M           | 37.453M         |
| 5510MHz                        | Pass   | Inf        | 39.71M           | 37.536M         | 39.16M           | 37.676M         |
| 5550MHz                        | Pass   | Inf        | 77.55M           | 38.587M         | 51.81M           | 37.789M         |
| 5670MHz                        | Pass   | Inf        | 39.71M           | 37.692M         | 39.38M           | 37.605M         |
| 5710MHz Straddle 5.47-5.725GHz | Pass   | Inf        | 36.96M           | 34.128M         | 23.87M           | 17.431M         |
| 5710MHz Straddle 5.725-5.85GHz | Pass   | 500k       | 4.56M            | 32.38M          | 2.54M            | 15.043M         |
| 5755MHz                        | Pass   | 500k       | 37.51M           | 42.785M         | 37.07M           | 38.264M         |
| 5795MHz                        | Pass   | 500k       | 35.31M           | 62.344M         | 36.19M           | 57.987M         |
| 802.11ax HEW80_Nss1,(MCS0)_2TX | -      | -          | -                | -               | -                | -               |
| 5210MHz                        | Pass   | Inf        | 81.62M           | 77.225M         | 80.52M           | 77.188M         |
| 5290MHz                        | Pass   | Inf        | 81.84M           | 77.174M         | 81.18M           | 77.506M         |
| 5530MHz                        | Pass   | Inf        | 81.4M            | 76.973M         | 80.96M           | 76.971M         |
| 5610MHz                        | Pass   | Inf        | 99M              | 77.432M         | 97.9M            | 77.159M         |
| 5690MHz Straddle 5.47-5.725GHz | Pass   | Inf        | 85.35M           | 73.397M         | 75.15M           | 73.329M         |
| 5690MHz Straddle 5.725-5.85GHz | Pass   | 500k       | 4.04M            | 33.673M         | 3.24M            | 30.725M         |
| 5775MHz                        | Pass   | 500k       | 77.22M           | 77.634M         | 76.34M           | 77.479M         |



Port X-N dB = Port X 6dB down bandwidth for 5.725-5.85GHz band / 26dB down bandwidth for other band  
Port X-OBW = Port X 99% occupied bandwidth

**5.15-5.25GHz\_802.11a\_Nss1,(6Mbps)\_2TX**
**EBW**
**5180MHz**

27/06/2024

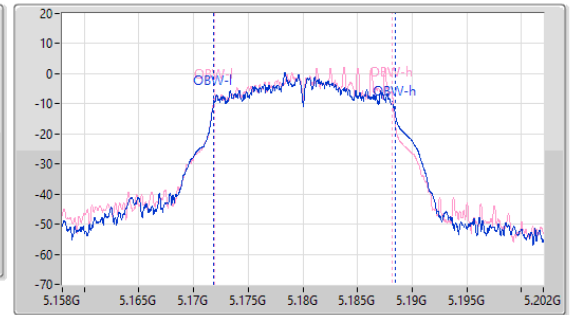
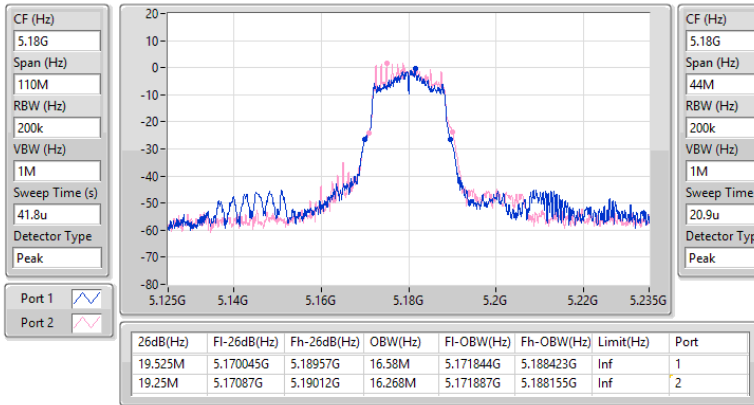

**5.15-5.25GHz\_802.11a\_Nss1,(6Mbps)\_2TX**
**EBW**
**5200MHz**

27/06/2024

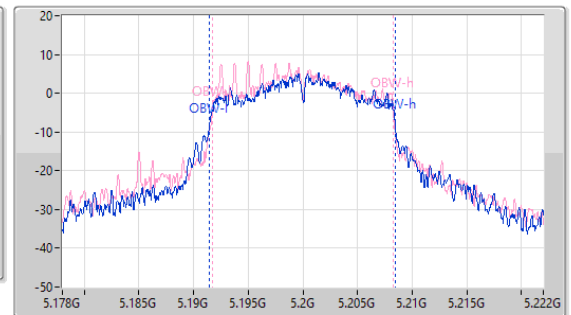
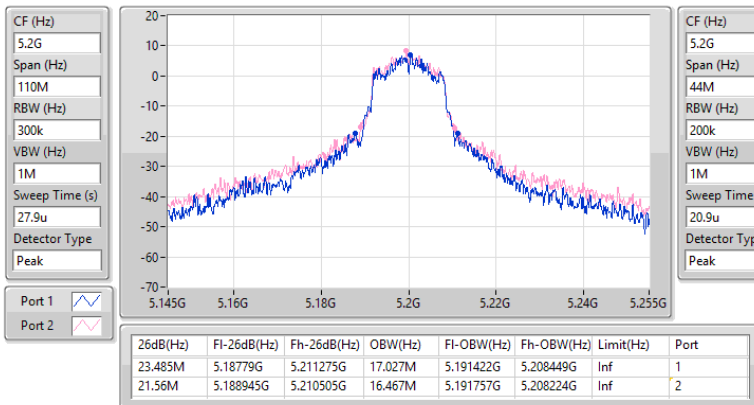


**5.15-5.25GHz\_802.11a\_Nss1,(6Mbps)\_2TX**
**EBW**
**5240MHz**

27/06/2024

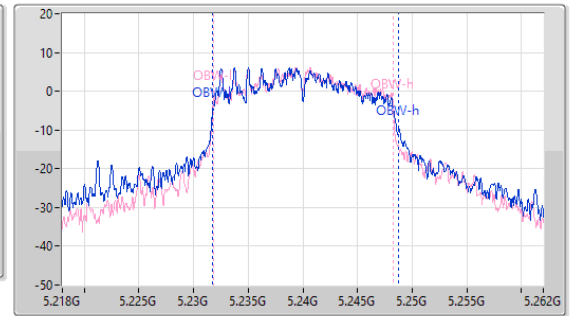
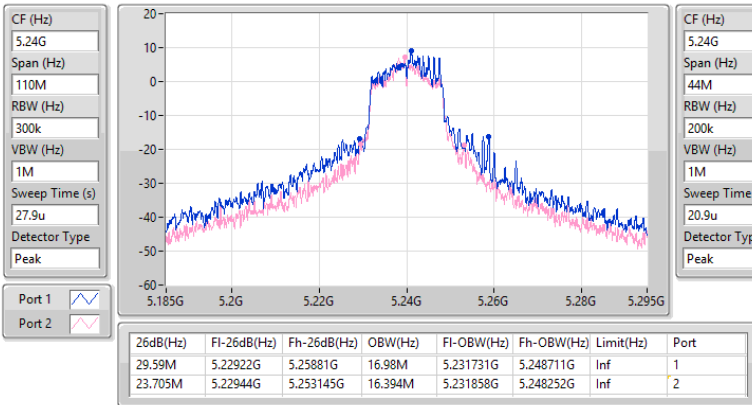

**5.25-5.35GHz\_802.11a\_Nss1,(6Mbps)\_2TX**
**EBW**
**5260MHz**

27/06/2024

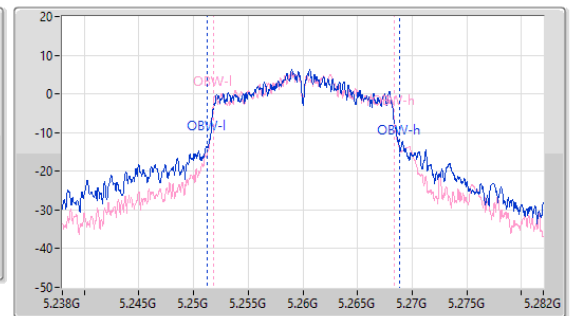
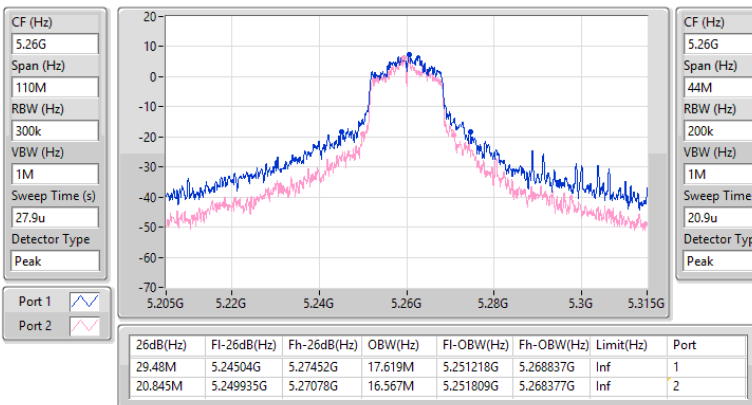


**5.25-5.35GHz\_802.11a\_Nss1,(6Mbps)\_2TX**
**EBW**
**5300MHz**

27/06/2024

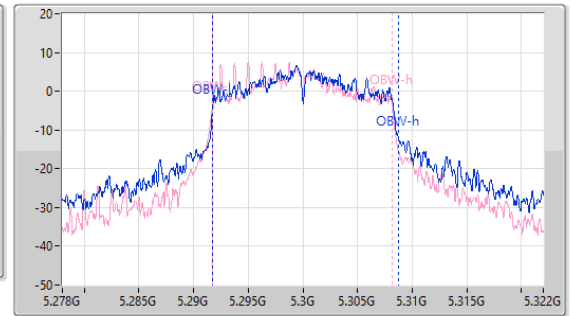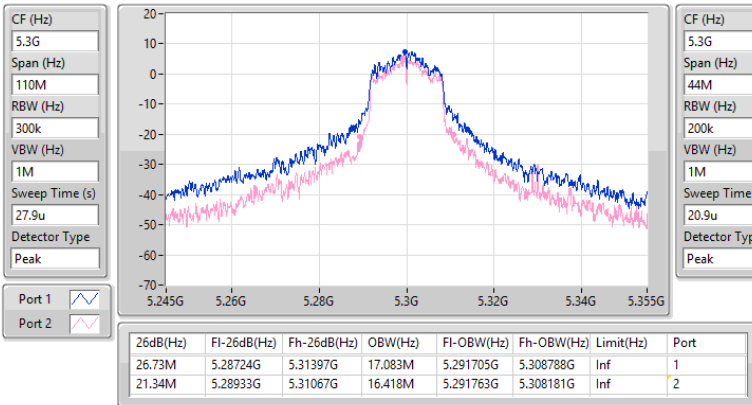

**5.25-5.35GHz\_802.11a\_Nss1,(6Mbps)\_2TX**
**EBW**
**5320MHz**

27/06/2024

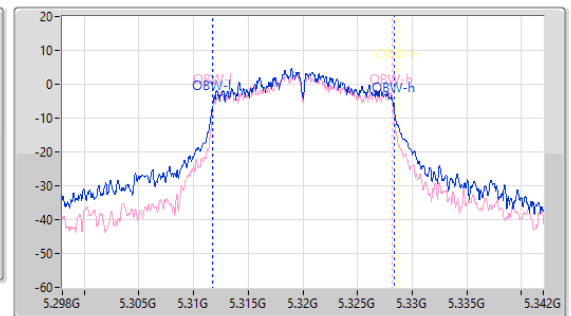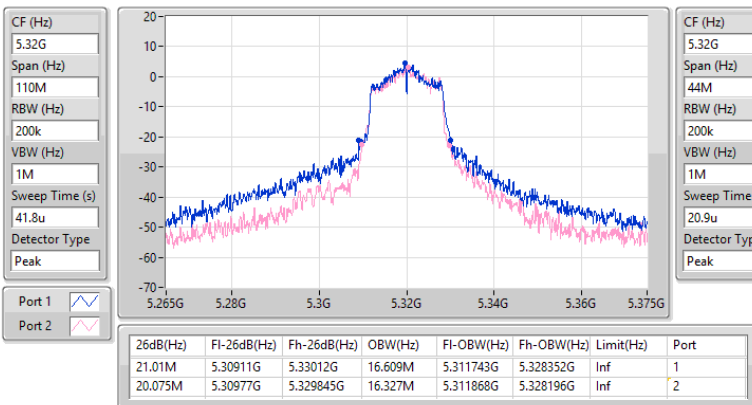


**5.47-5.725GHz\_802.11a\_Nss1,(6Mbps)\_2TX**
**EBW**
**5500MHz**

27/06/2024

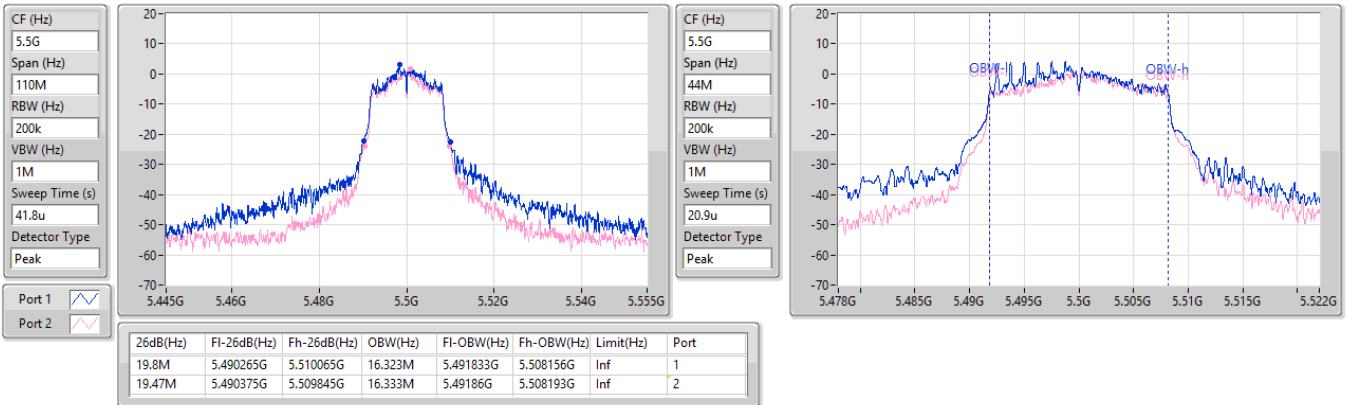

**5.47-5.725GHz\_802.11a\_Nss1,(6Mbps)\_2TX**
**EBW**
**5580MHz**

27/06/2024

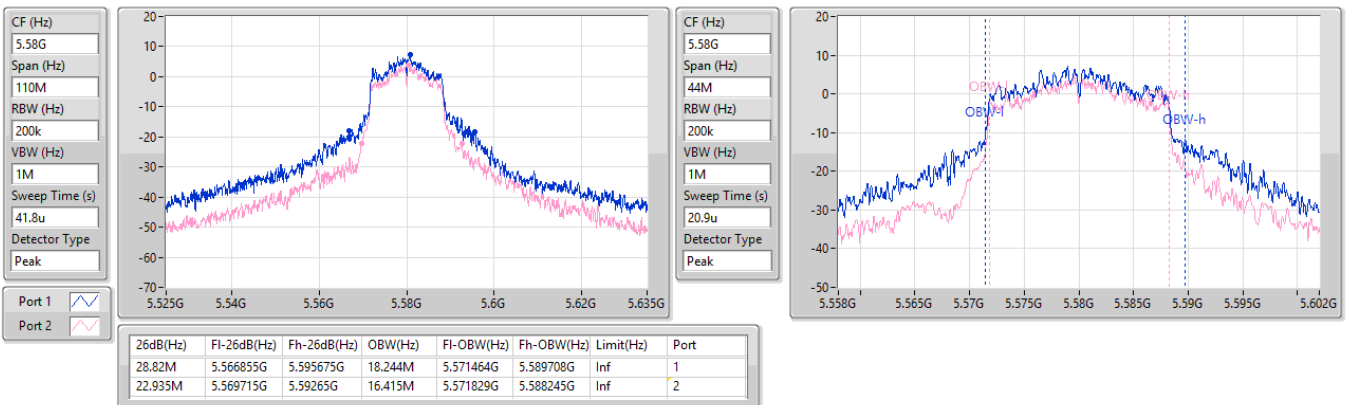


**5.47-5.725GHz\_802.11a\_Nss1,(6Mbps)\_2TX**
**EBW**
**5700MHz**

27/06/2024

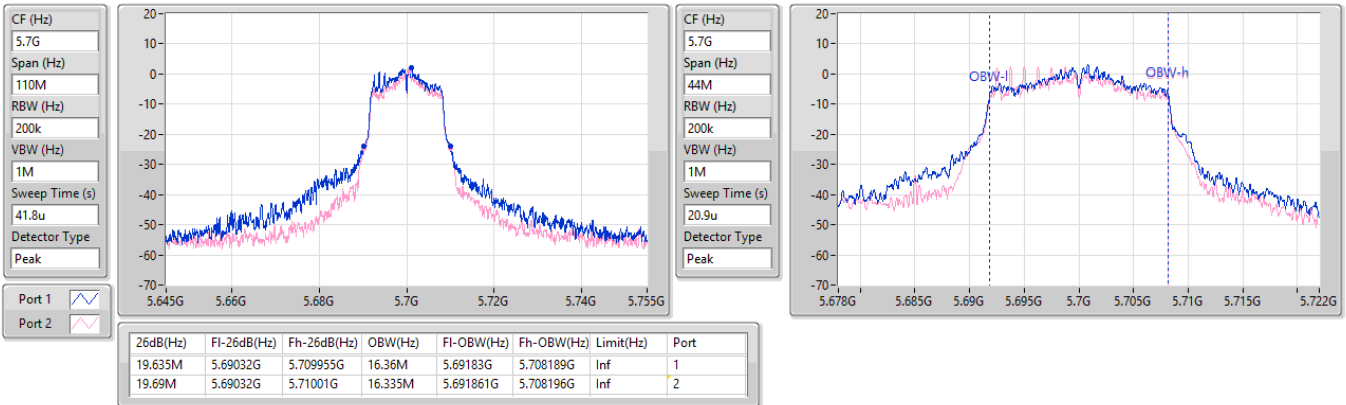
**5.47-5.725GHz\_802.11a\_Nss1,(6Mbps)\_2TX**
**EBW**
**5720MHz Straddle 5.47-5.725GHz**

27/06/2024

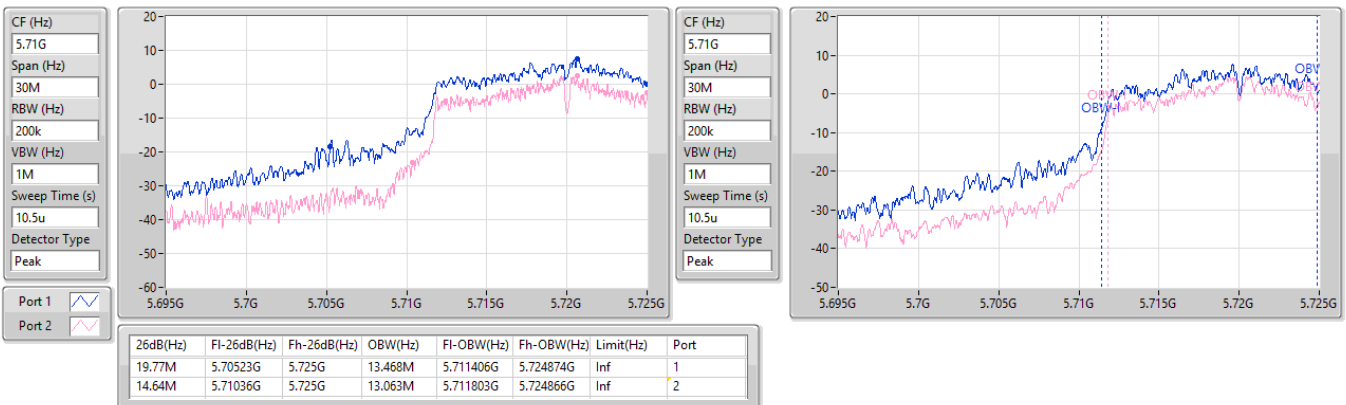


5.725-5.85GHz\_802.11a\_Nss1,(6Mbps)\_2TX

EBW

5720MHz Straddle 5.725-5.85GHz

27/06/2024

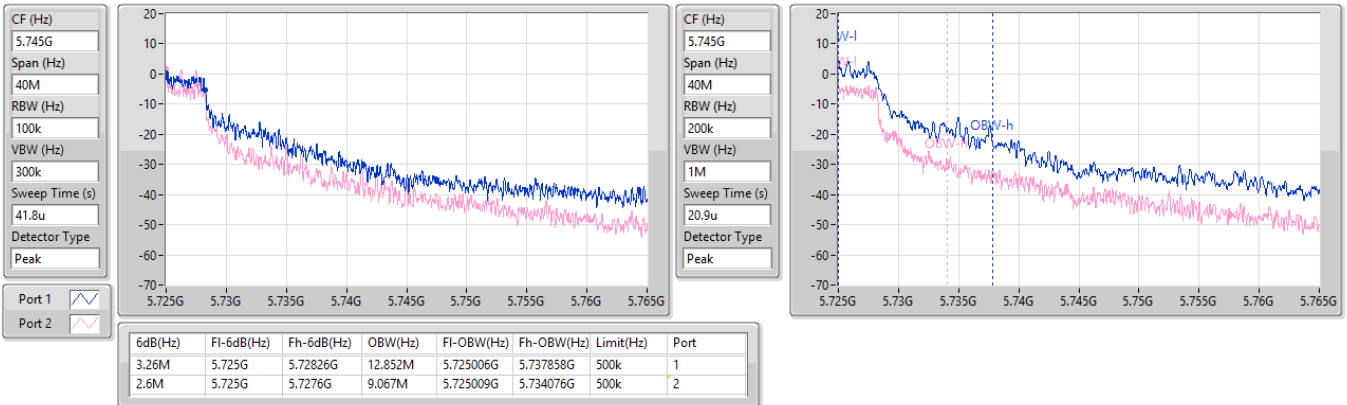


5.725-5.85GHz\_802.11a\_Nss1,(6Mbps)\_2TX

EBW

5720MHz Straddle 5.725-5.85GHz

27/06/2024

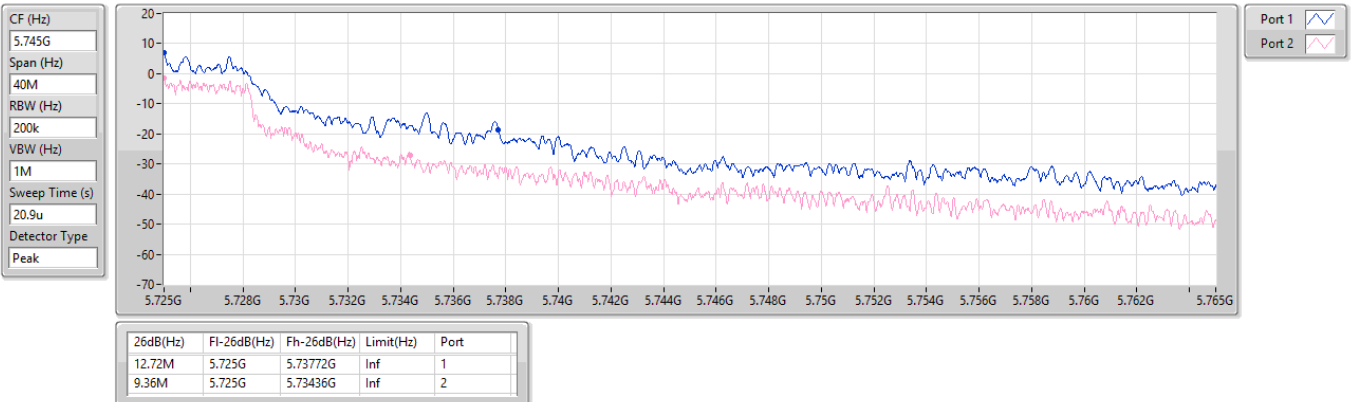


5.725-5.85GHz\_802.11a\_Nss1,(6Mbps)\_2TX

EBW

5745MHz

27/06/2024

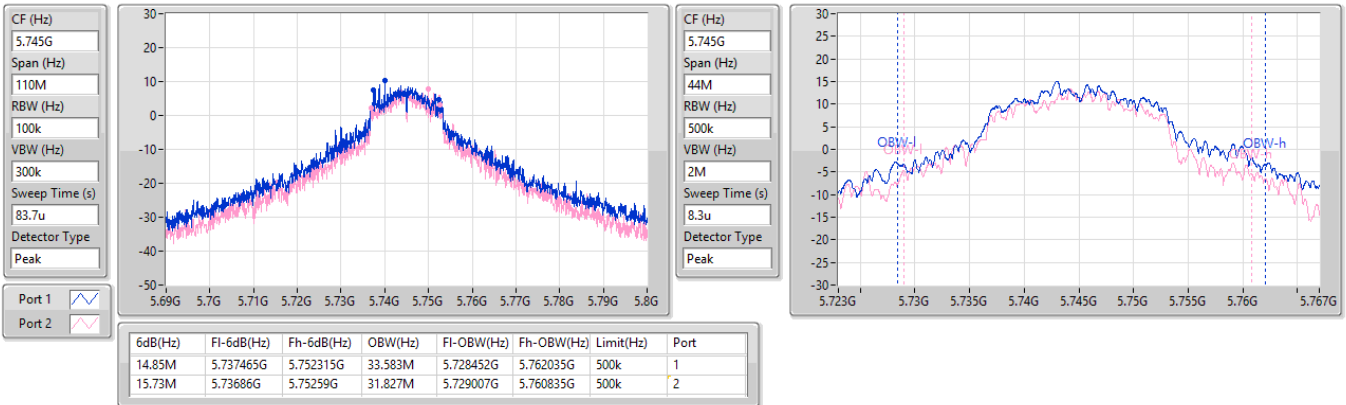


5.725-5.85GHz\_802.11a\_Nss1,(6Mbps)\_2TX

EBW

5745MHz

27/06/2024

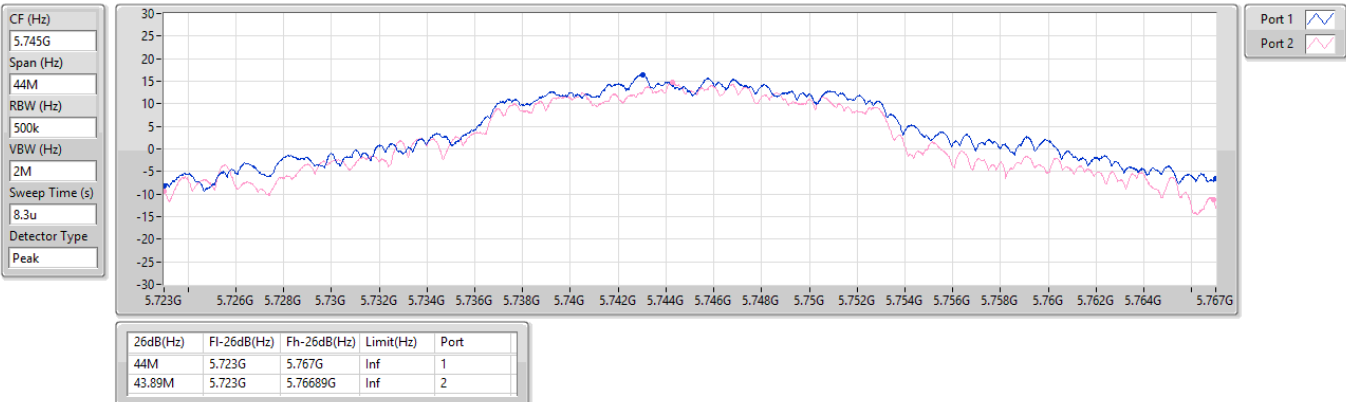


5.725-5.85GHz\_802.11a\_Nss1,(6Mbps)\_2TX

EBW

5785MHz

27/06/2024

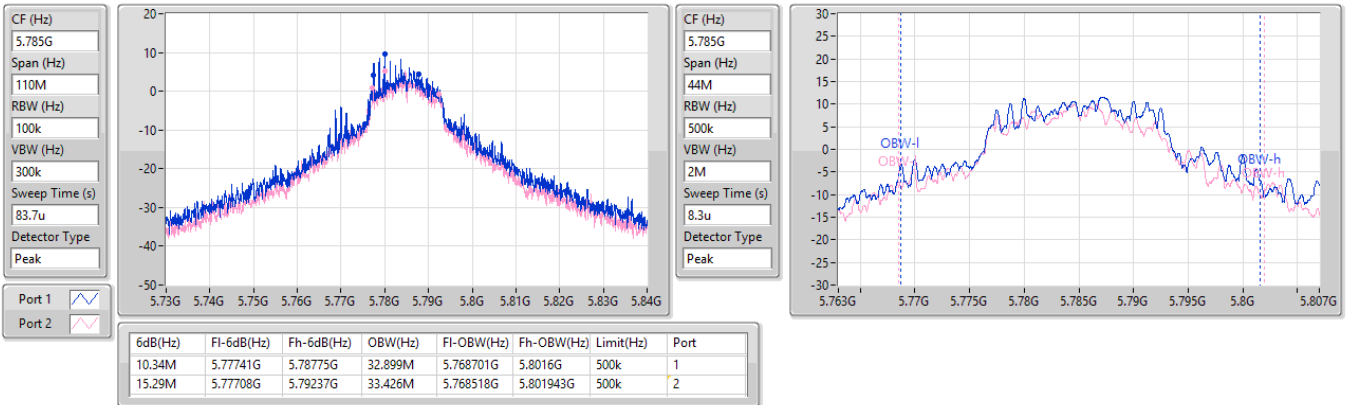


5.725-5.85GHz\_802.11a\_Nss1,(6Mbps)\_2TX

EBW

5785MHz

27/06/2024

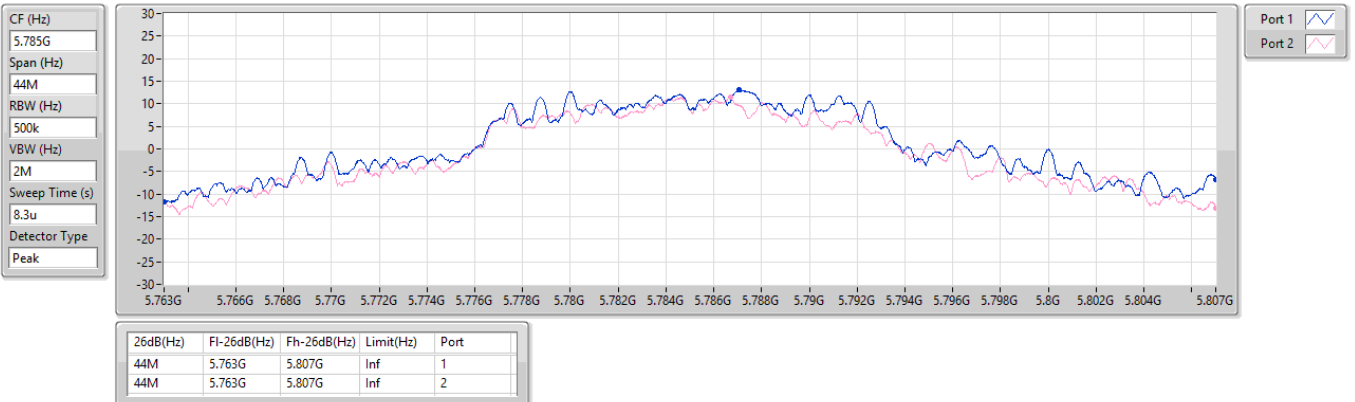


5.725-5.85GHz\_802.11a\_Nss1,(6Mbps)\_2TX

EBW

5825MHz

27/06/2024

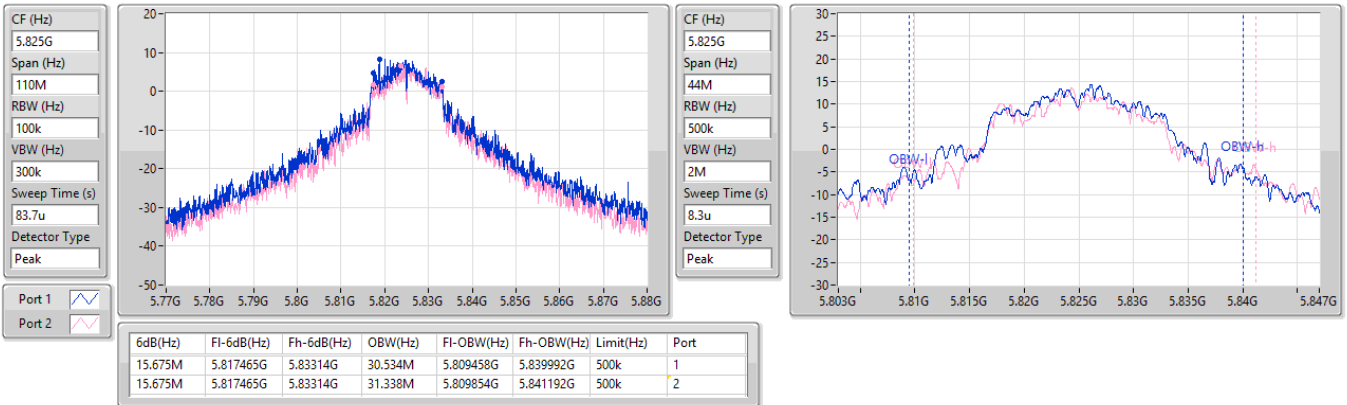


5.725-5.85GHz\_802.11a\_Nss1,(6Mbps)\_2TX

EBW


5825MHz

27/06/2024

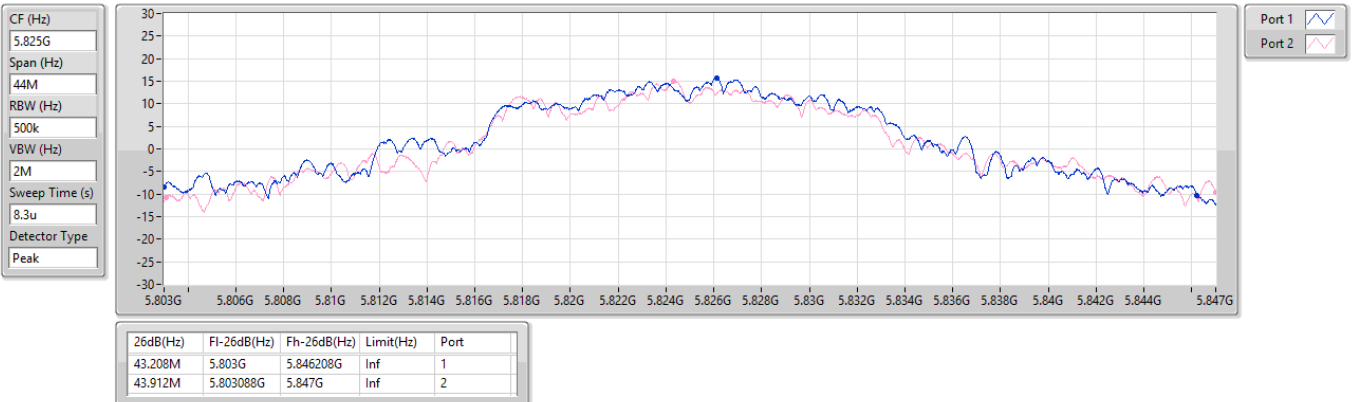


**5.15-5.25GHz\_802.11ax\_HEW20\_Nss1,(MCS0)\_2TX**
**EBW**
**5180MHz**

27/06/2024

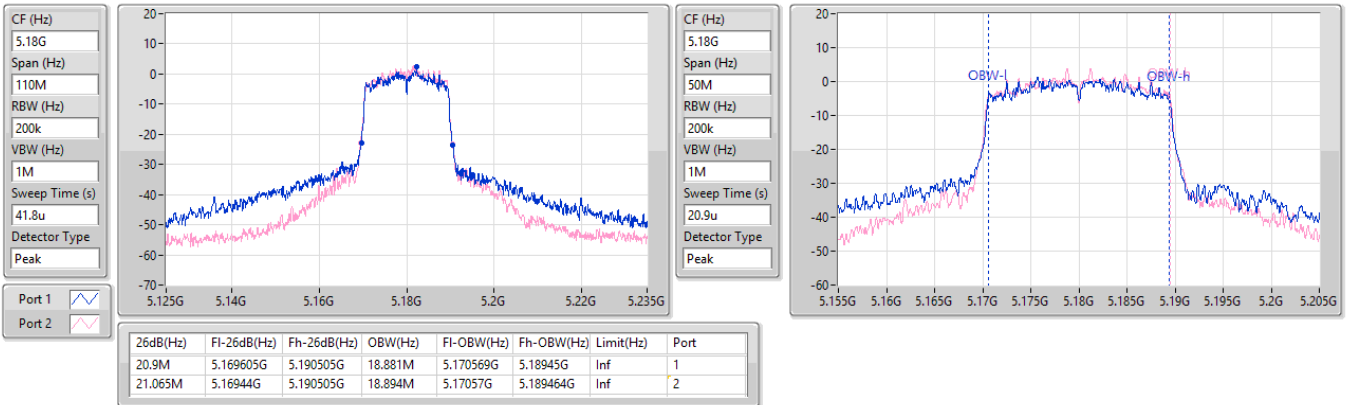

**5.15-5.25GHz\_802.11ax\_HEW20\_Nss1,(MCS0)\_2TX**
**EBW**
**5200MHz**

27/06/2024

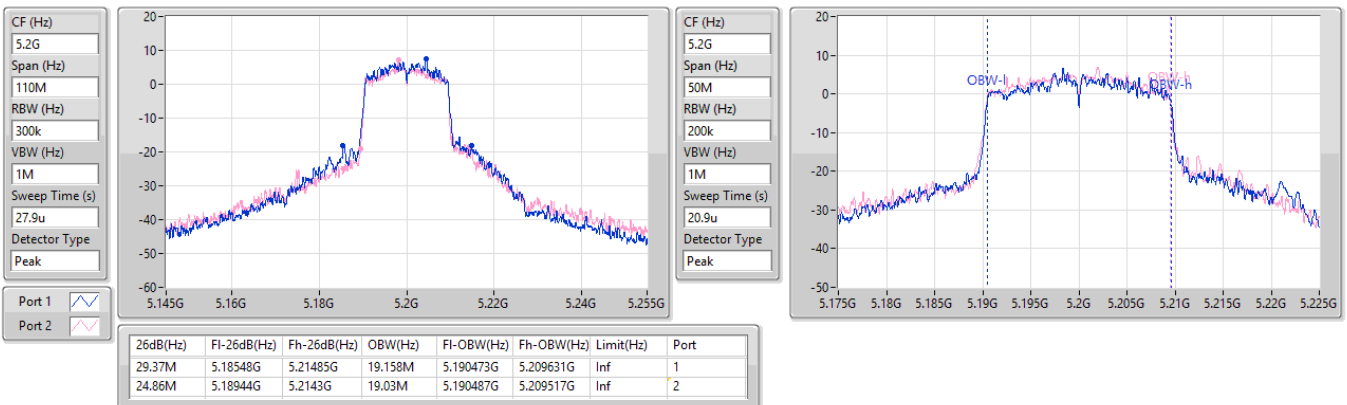


**5.15-5.25GHz\_802.11ax HEW20\_Nss1,(MCS0)\_2TX**
**EBW**
**5240MHz**

29/06/2024

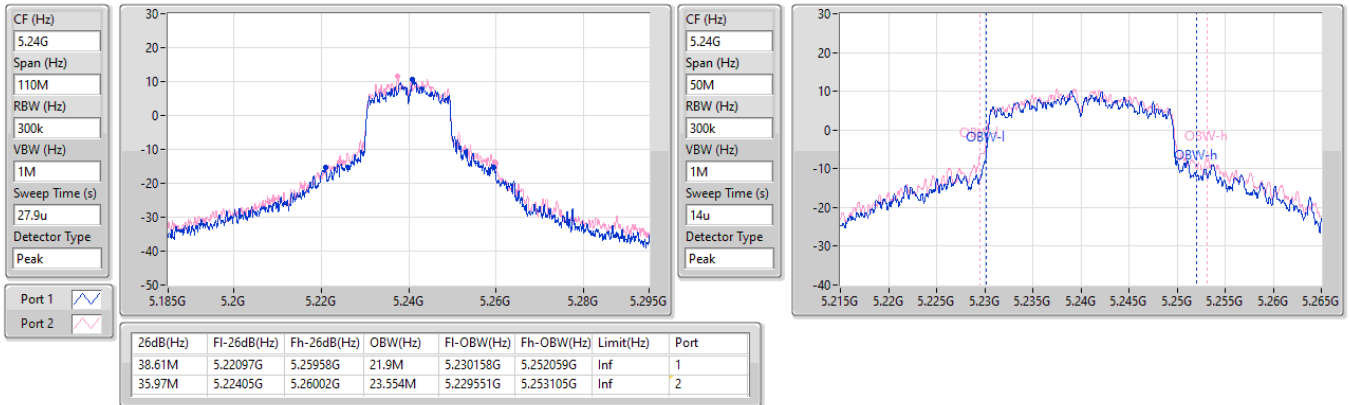
**5.25-5.35GHz\_802.11ax HEW20\_Nss1,(MCS0)\_2TX**
**EBW**
**5260MHz**

29/06/2024


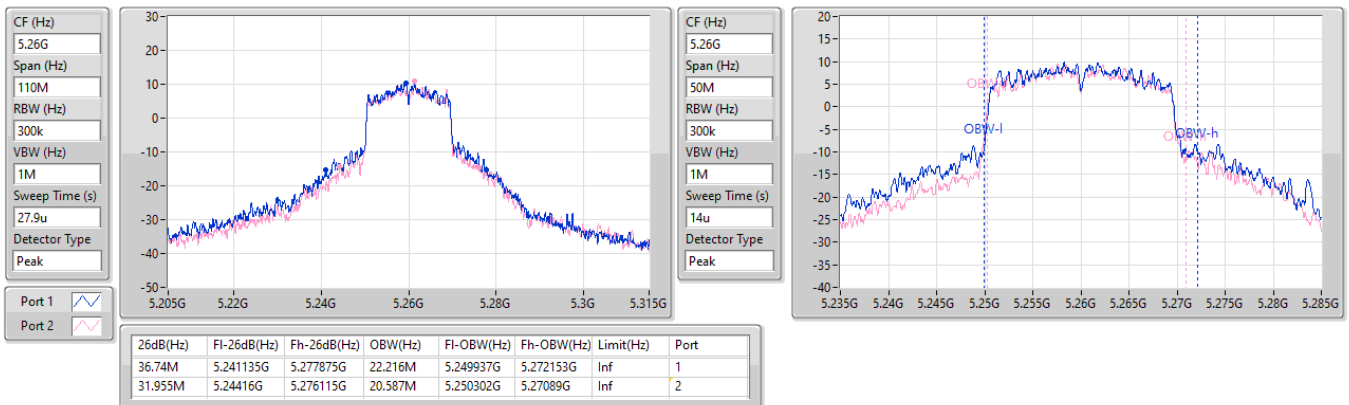


## 5.25-5.35GHz\_802.11ax\_HEW20\_Nss1,(MCS0)\_2TX

EBW

5300MHz

29/06/2024

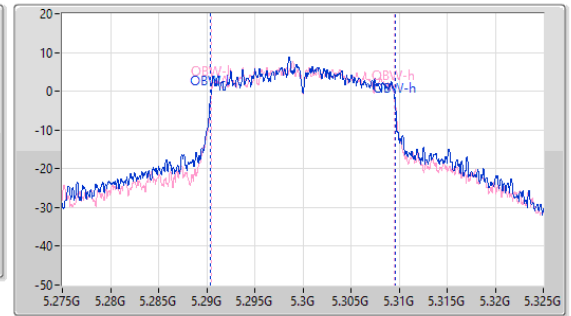
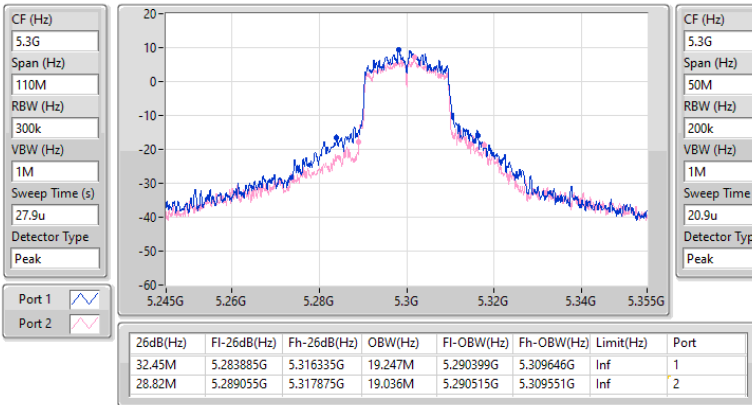


## 5.25-5.35GHz\_802.11ax\_HEW20\_Nss1,(MCS0)\_2TX

EBW

5320MHz

27/06/2024

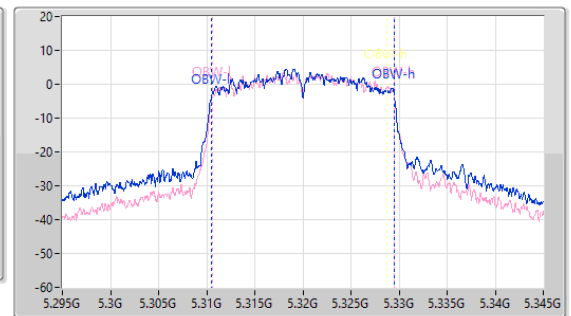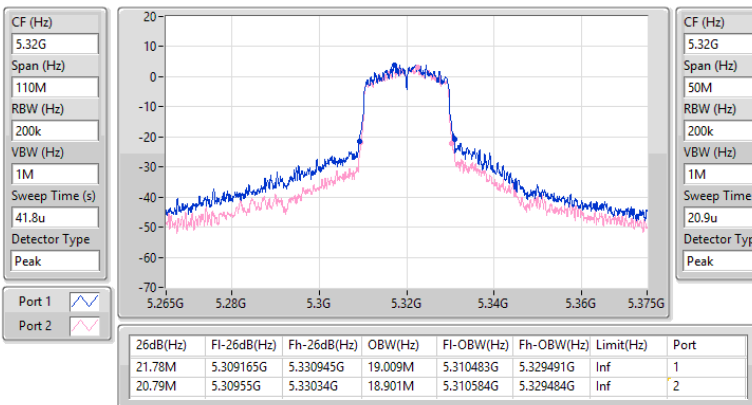


## 5.47-5.725GHz\_802.11ax HEW20\_Nss1,(MCS0)\_2TX

EBW

5500MHz

27/06/2024

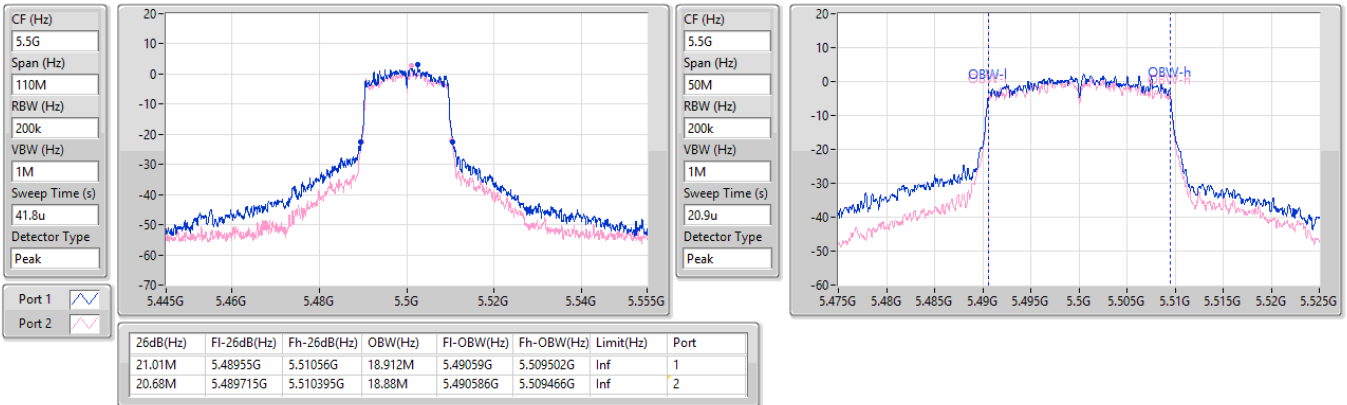


## 5.47-5.725GHz\_802.11ax HEW20\_Nss1,(MCS0)\_2TX

EBW

5580MHz

29/06/2024

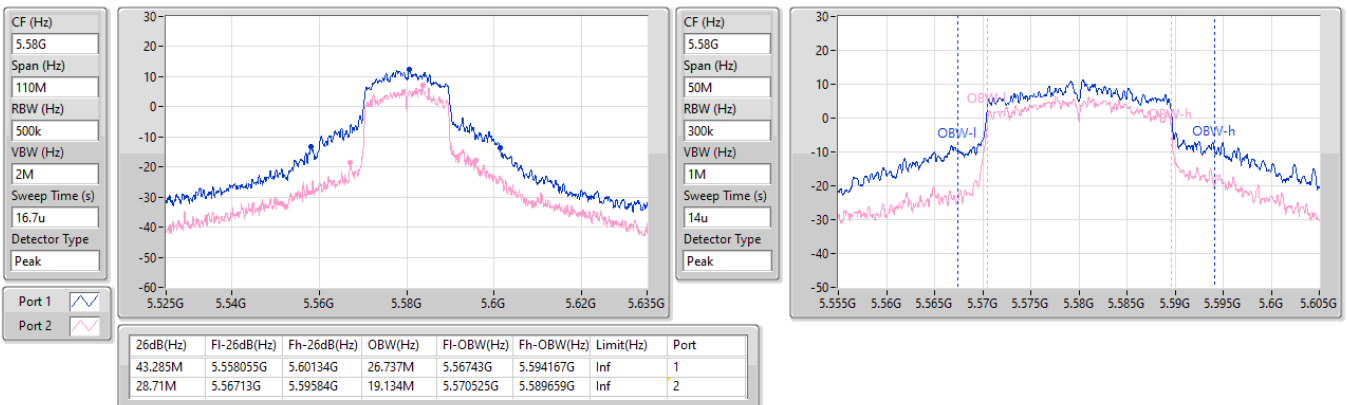


## 5.47-5.725GHz\_802.11ax HEW20\_Nss1,(MCS0)\_2TX

EBW

5700MHz

27/06/2024

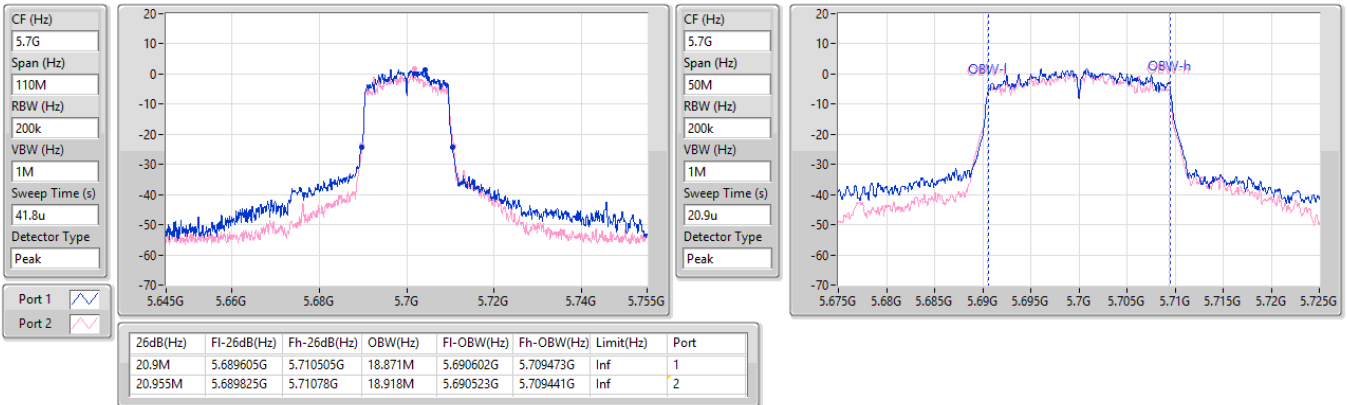


## 5.47-5.725GHz\_802.11ax HEW20\_Nss1,(MCS0)\_2TX

EBW

5720MHz Straddle 5.47-5.725GHz

29/06/2024

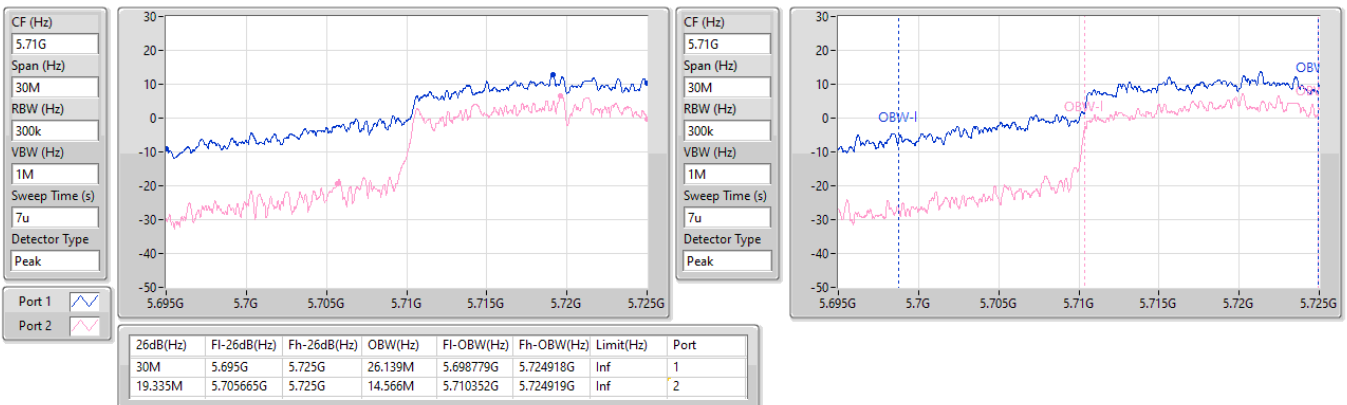


5.725-5.85GHz\_802.11ax HEW20\_Nss1,(MCS0)\_2TX

EBW

5720MHz Straddle 5.725-5.85GHz

29/06/2024

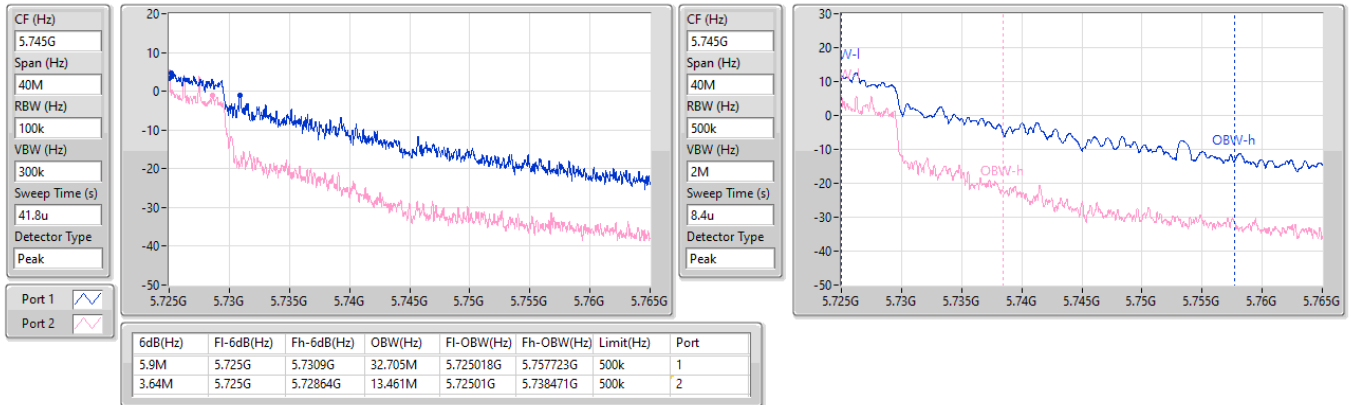


5.725-5.85GHz\_802.11ax HEW20\_Nss1,(MCS0)\_2TX

EBW

5720MHz Straddle 5.725-5.85GHz

29/06/2024

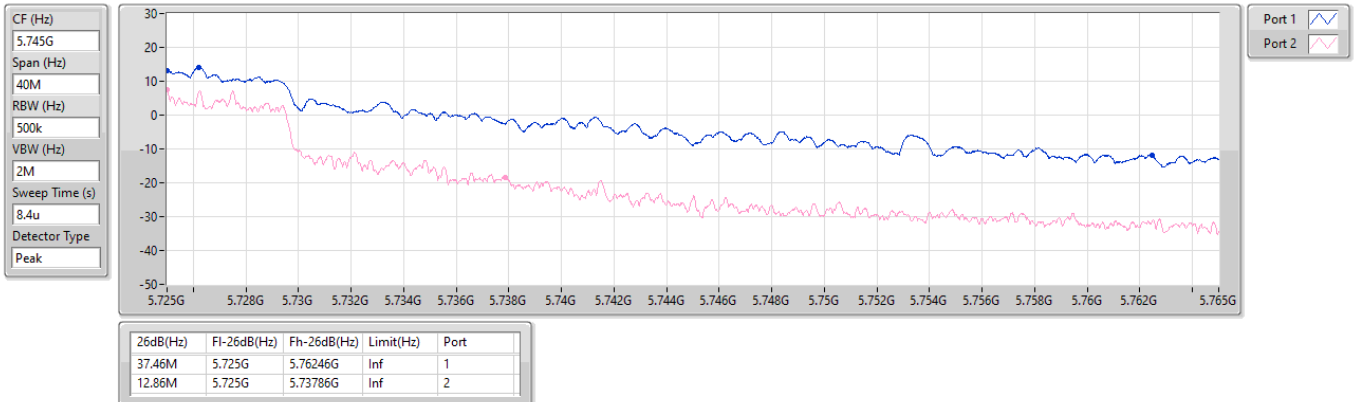


5.725-5.85GHz\_802.11ax HEW20\_Nss1,(MCS0)\_2TX

EBW

5745MHz

27/06/2024

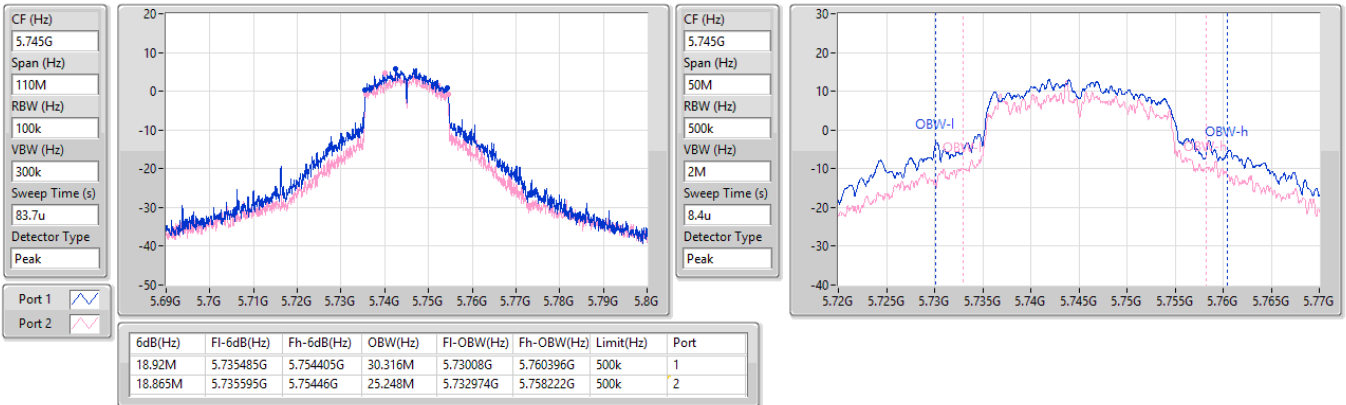


5.725-5.85GHz\_802.11ax HEW20\_Nss1,(MCS0)\_2TX

EBW

5745MHz

27/06/2024

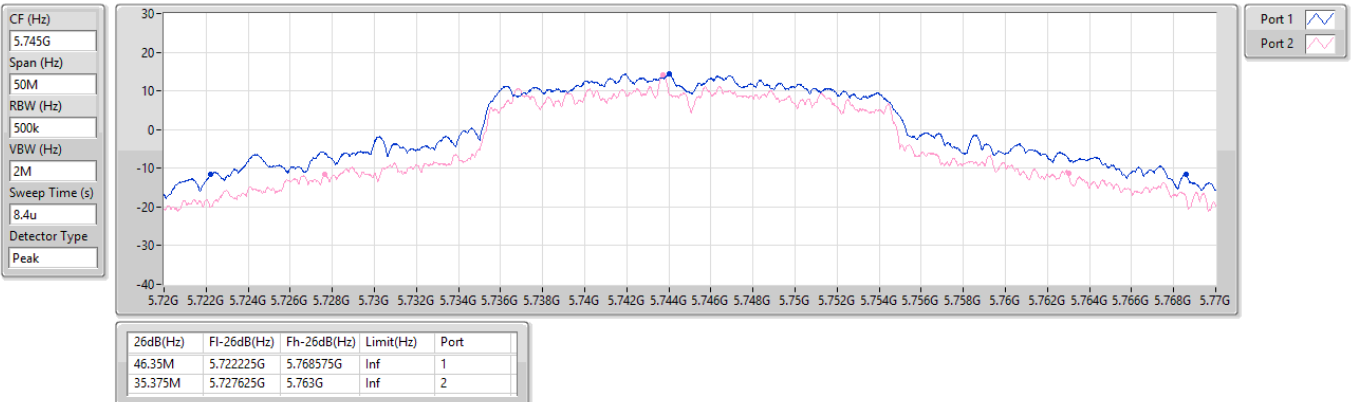


5.725-5.85GHz\_802.11ax HEW20\_Nss1,(MCS0)\_2TX

EBW

5785MHz

27/06/2024

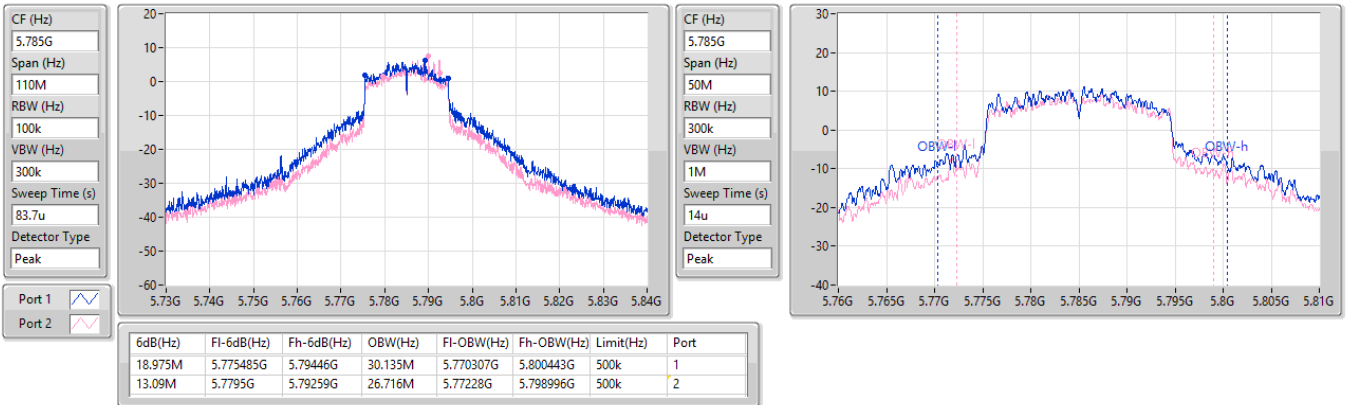


5.725-5.85GHz\_802.11ax HEW20\_Nss1,(MCS0)\_2TX

EBW

5785MHz

27/06/2024

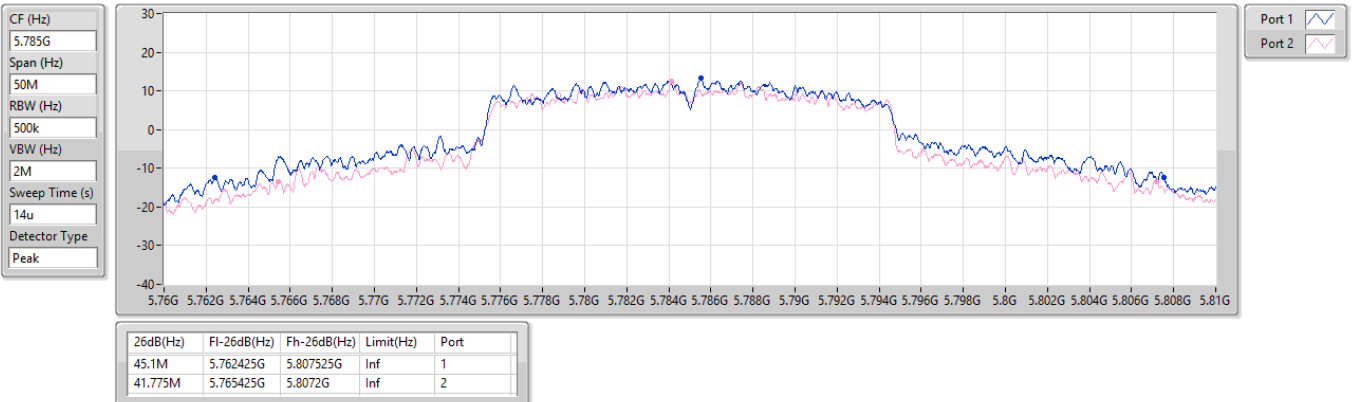


5.725-5.85GHz\_802.11ax\_HEW20\_Nss1,(MCS0)\_2TX

EBW

5825MHz

27/06/2024

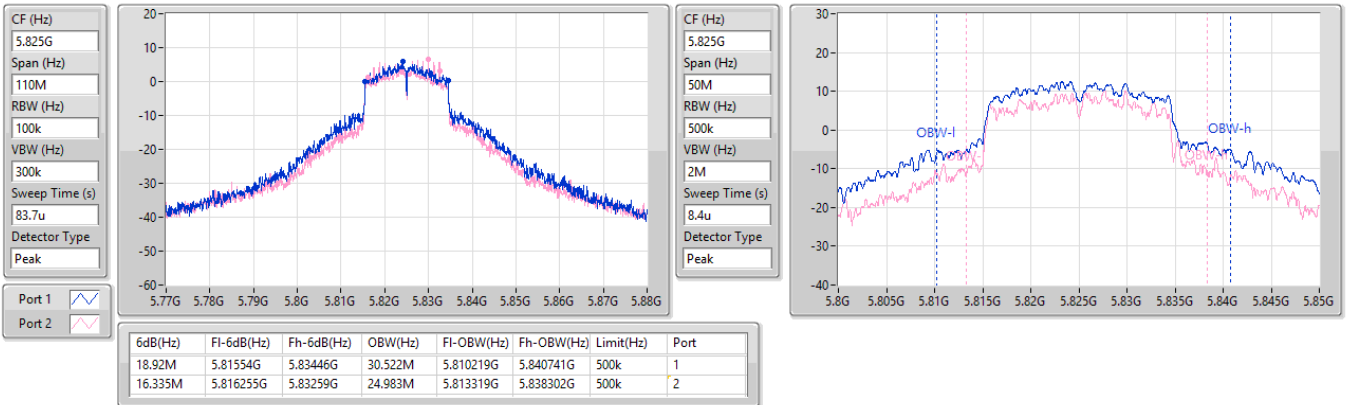


5.725-5.85GHz\_802.11ax\_HEW20\_Nss1,(MCS0)\_2TX

EBW

5825MHz

27/06/2024

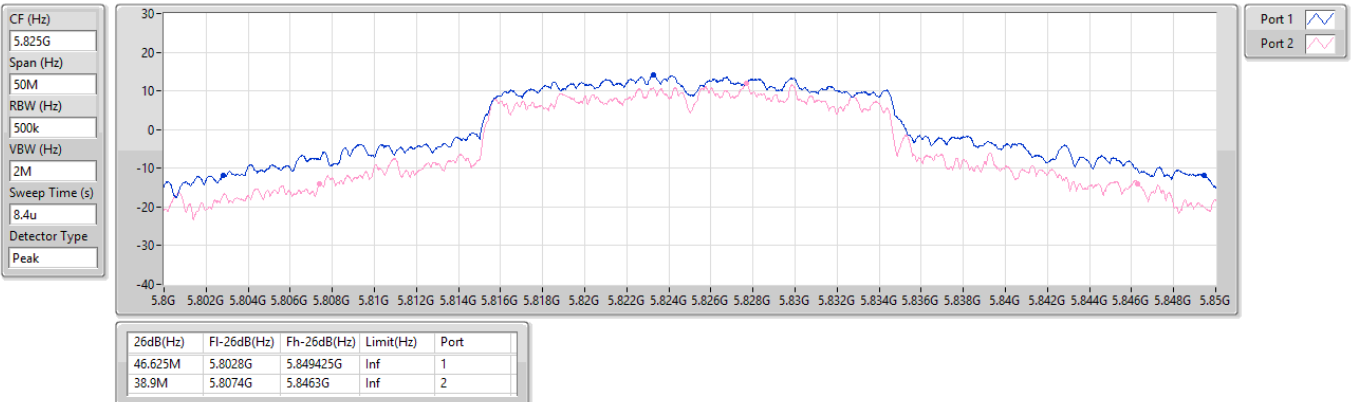


## 5.15-5.25GHz\_802.11ax\_HEW40\_Nss1,(MCS0)\_2TX

EBW

5190MHz

27/06/2024

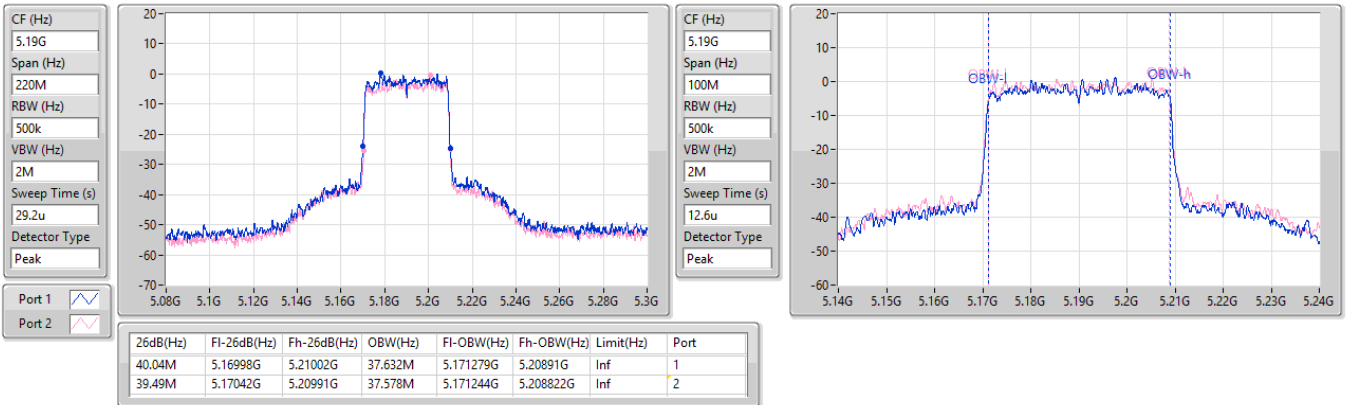


## 5.15-5.25GHz\_802.11ax\_HEW40\_Nss1,(MCS0)\_2TX

EBW

5230MHz

27/06/2024

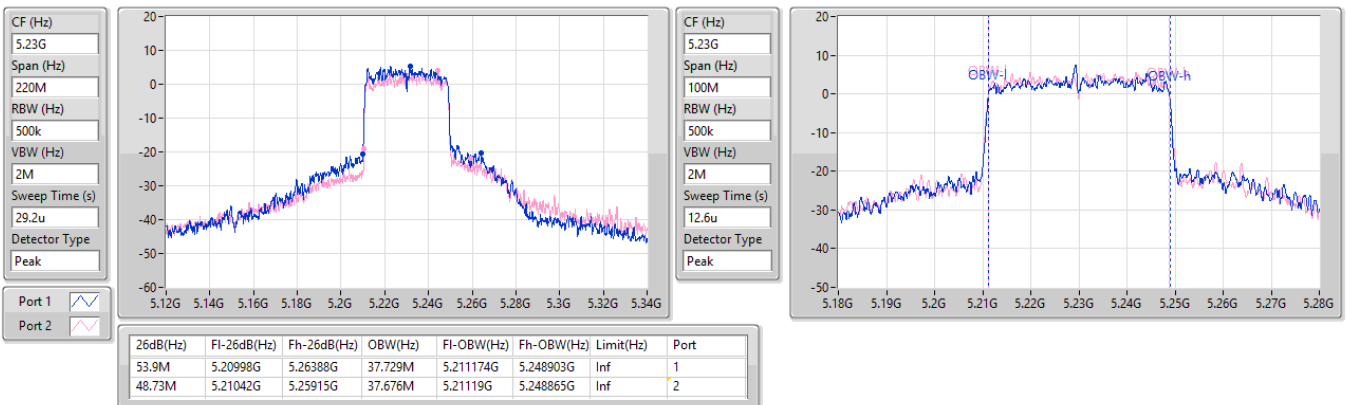


## 5.25-5.35GHz\_802.11ax HEW40\_Nss1,(MCS0)\_2TX

EBW

5270MHz

27/06/2024

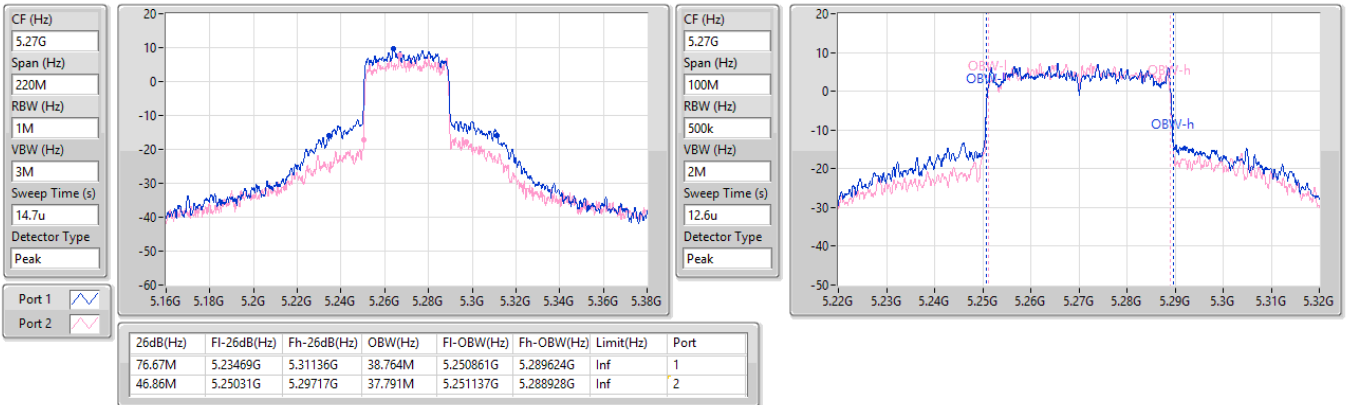


## 5.25-5.35GHz\_802.11ax HEW40\_Nss1,(MCS0)\_2TX

EBW


5310MHz

27/06/2024

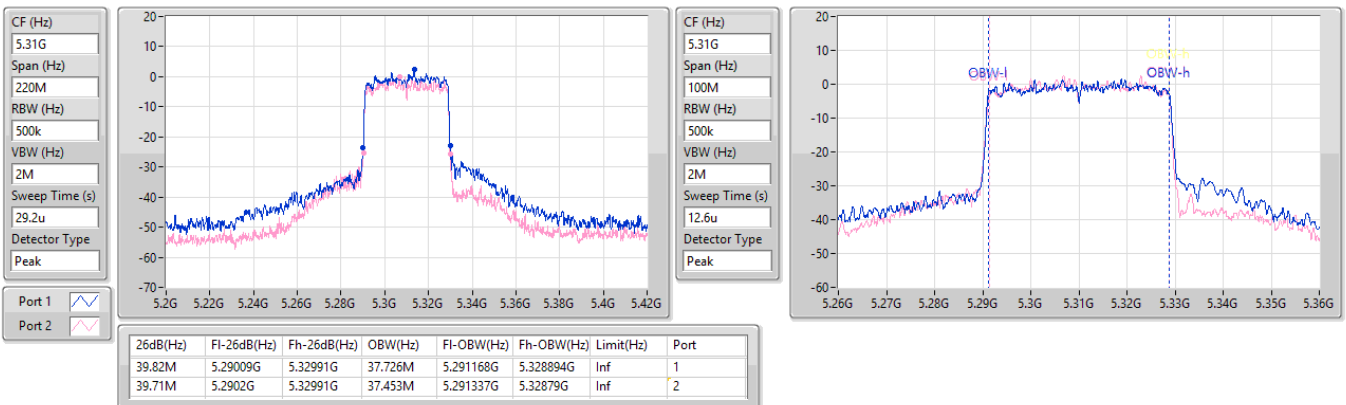


**5.47-5.725GHz\_802.11ax HEW40\_Nss1,(MCS0)\_2TX**
**EBW**
**5510MHz**

27/06/2024

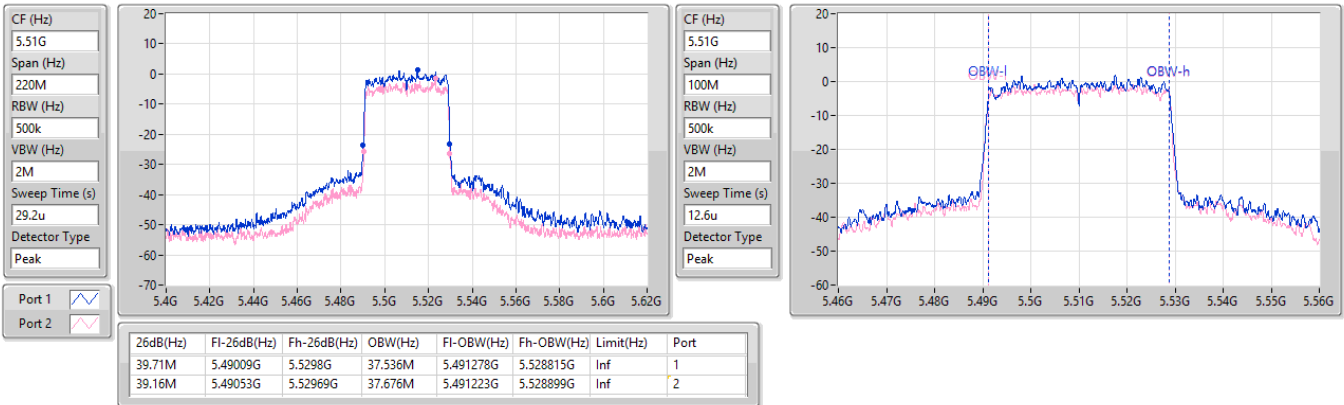
**5.47-5.725GHz\_802.11ax HEW40\_Nss1,(MCS0)\_2TX**
**EBW**
**5550MHz**

27/06/2024

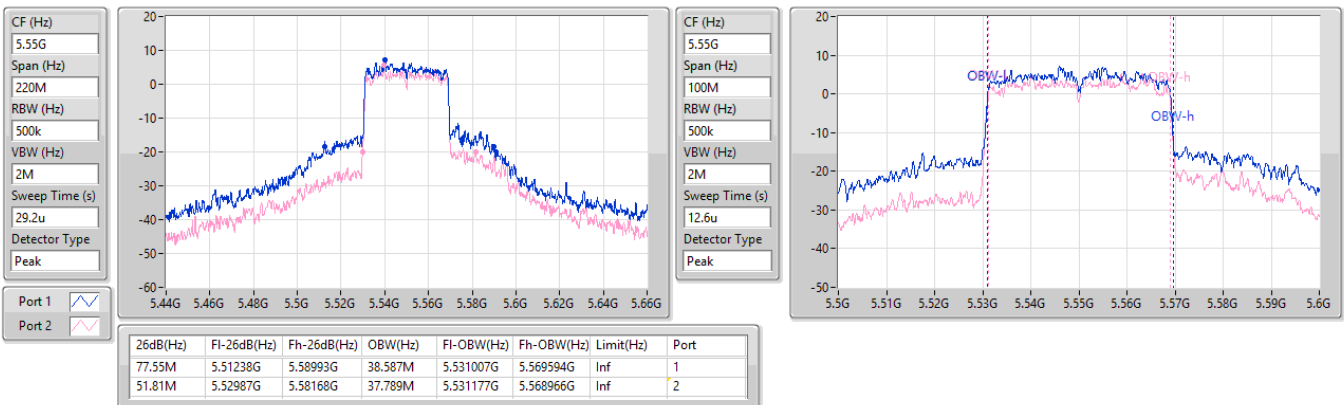


## 5.47-5.725GHz\_802.11ax HEW40\_Nss1,(MCS0)\_2TX

EBW

5670MHz

27/06/2024

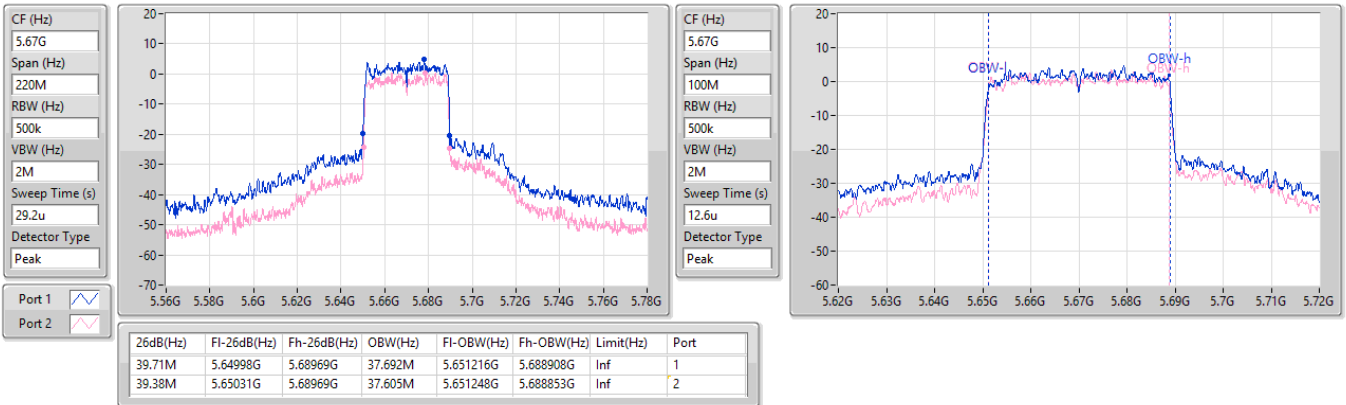


## 5.47-5.725GHz\_802.11ax HEW40\_Nss1,(MCS0)\_2TX

EBW

5710MHz Straddle 5.47-5.725GHz

29/06/2024

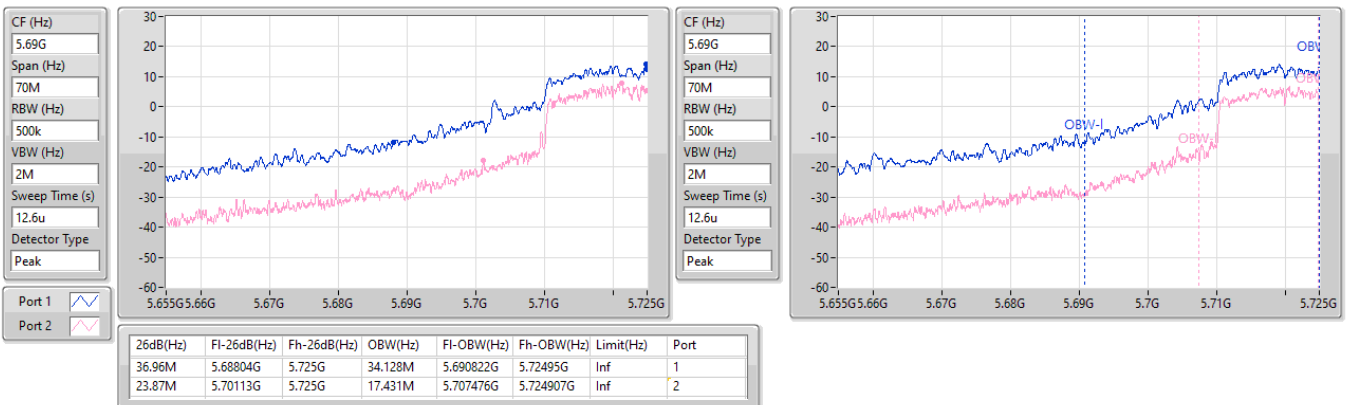


5.725-5.85GHz\_802.11ax HEW40\_Nss1,(MCS0)\_2TX

EBW

5710MHz Straddle 5.725-5.85GHz

29/06/2024

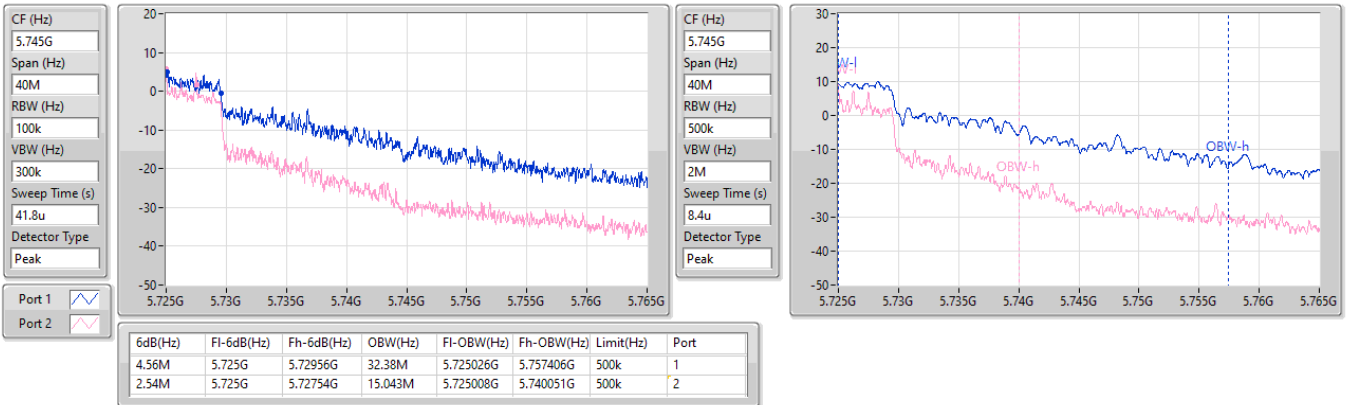


5.725-5.85GHz\_802.11ax HEW40\_Nss1,(MCS0)\_2TX

EBW

5710MHz Straddle 5.725-5.85GHz

29/06/2024

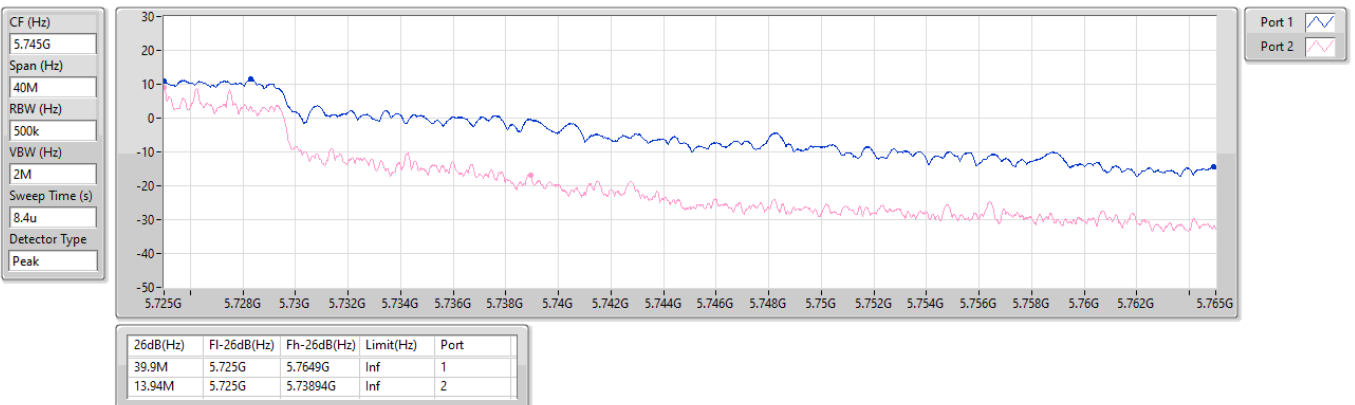


5.725-5.85GHz\_802.11ax HEW40\_Nss1,(MCS0)\_2TX

EBW

5755MHz

27/06/2024

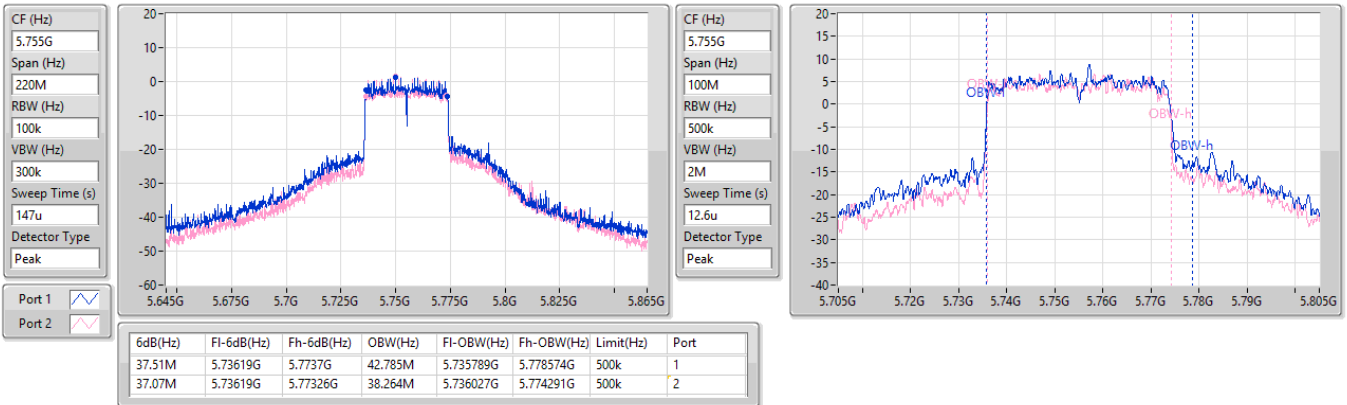


5.725-5.85GHz\_802.11ax HEW40\_Nss1,(MCS0)\_2TX

EBW

5755MHz

27/06/2024

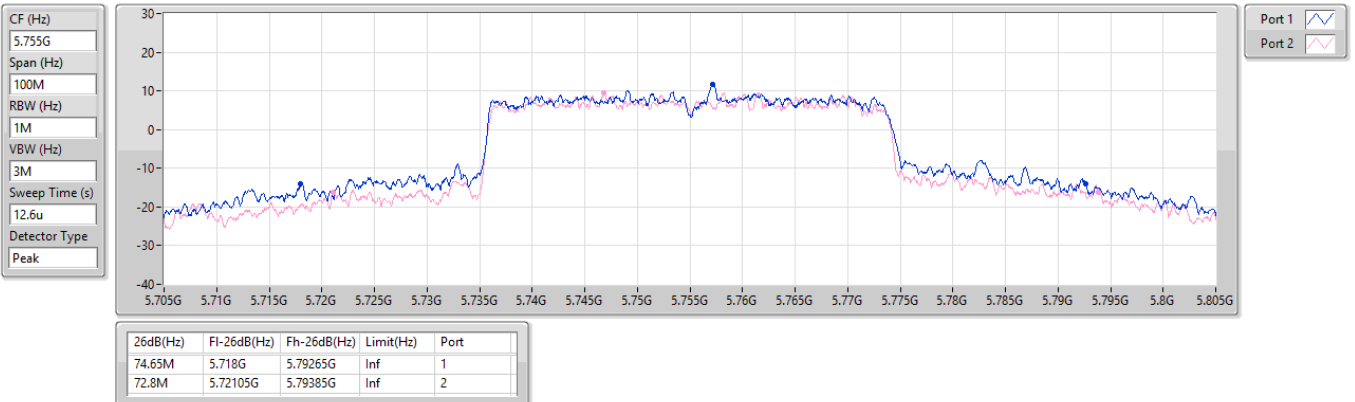


5.725-5.85GHz\_802.11ax HEW40\_Nss1,(MCS0)\_2TX

EBW

5795MHz

27/06/2024

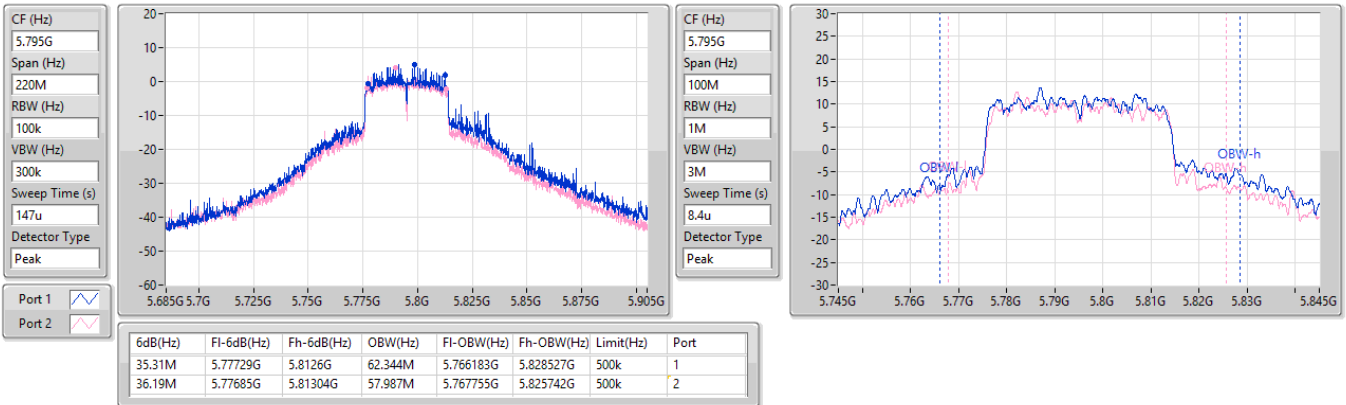


5.725-5.85GHz\_802.11ax HEW40\_Nss1,(MCS0)\_2TX

EBW

5795MHz

27/06/2024

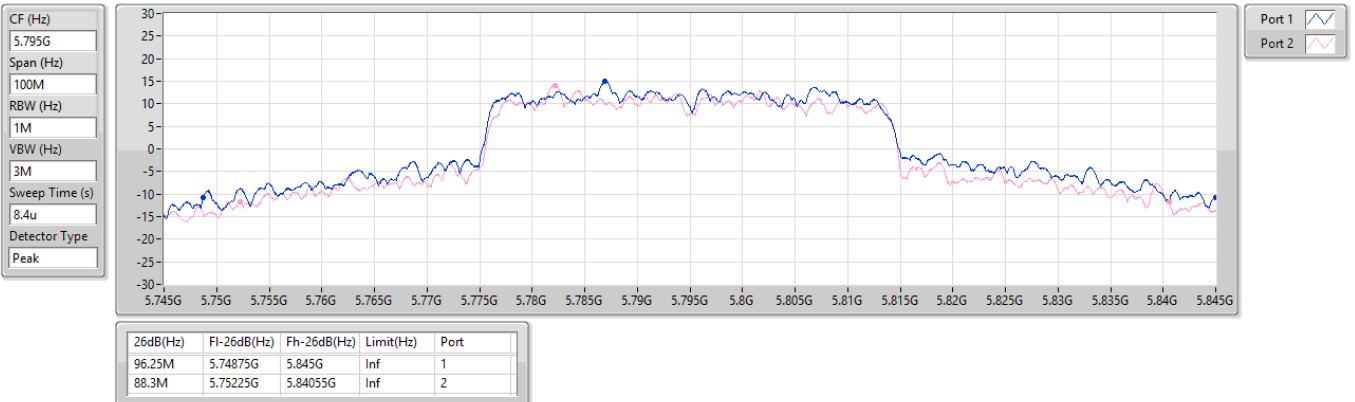


## 5.15-5.25GHz\_802.11ax HEW80\_Nss1,(MCS0)\_2TX

EBW

5210MHz

27/06/2024

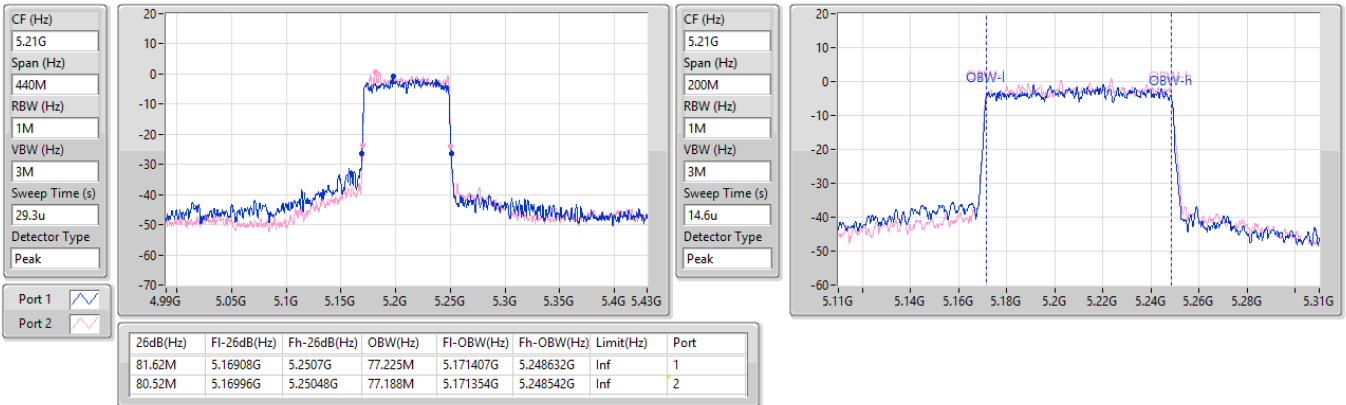


## 5.25-5.35GHz\_802.11ax HEW80\_Nss1,(MCS0)\_2TX

EBW


5290MHz

27/06/2024

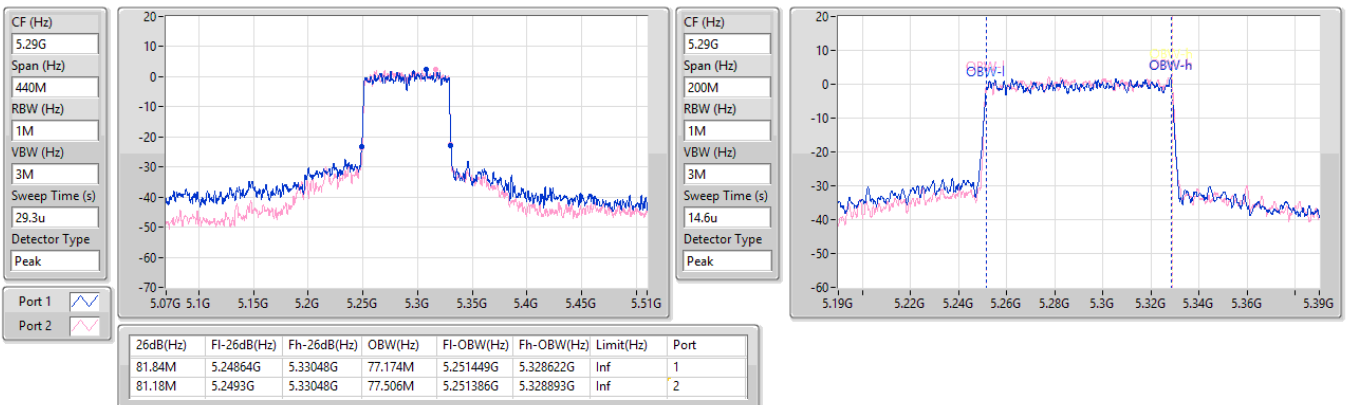


**5.47-5.725GHz\_802.11ax HEW80\_Nss1,(MCS0)\_2TX**
**EBW**
**5530MHz**

27/06/2024

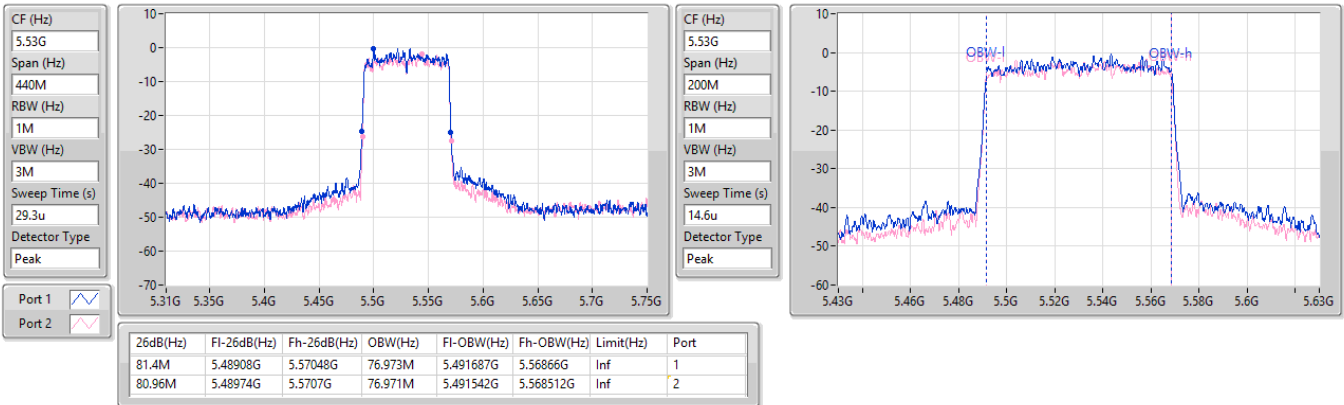
**5.47-5.725GHz\_802.11ax HEW80\_Nss1,(MCS0)\_2TX**
**EBW**
**5610MHz**

27/06/2024

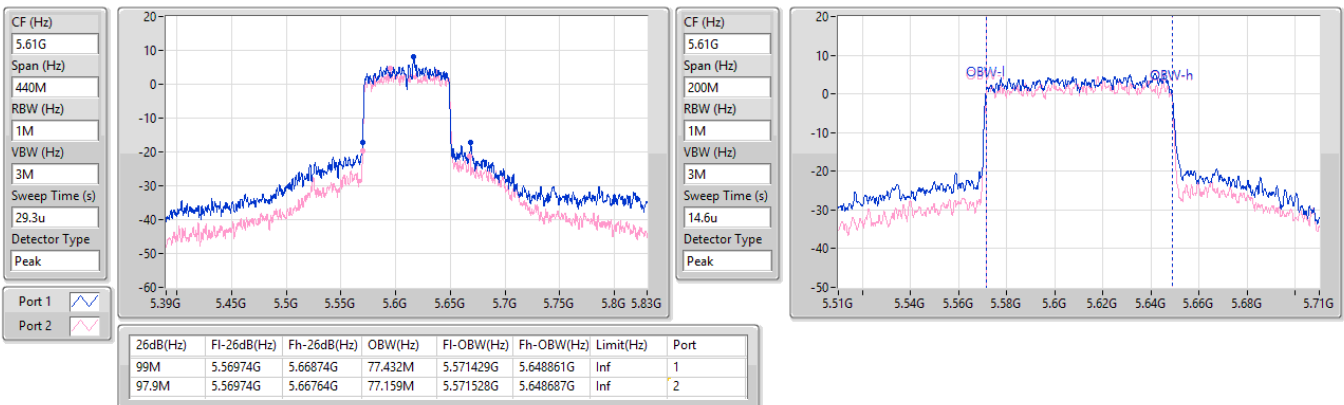


## 5.47-5.725GHz\_802.11ax HEW80\_Nss1,(MCS0)\_2TX

EBW

## 5690MHz Straddle 5.47-5.725GHz

27/06/2024

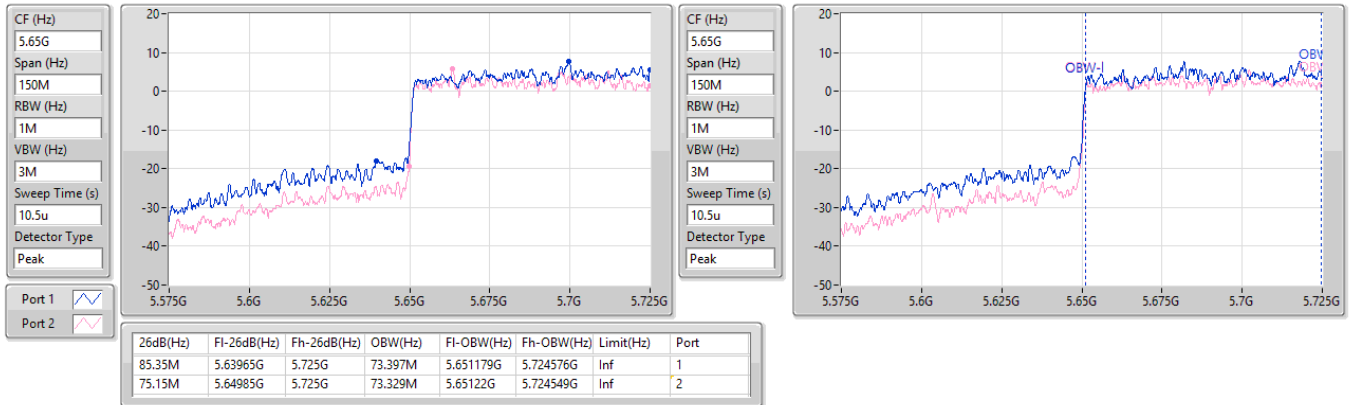


## 5.725-5.85GHz\_802.11ax HEW80\_Nss1,(MCS0)\_2TX

EBW

## 5690MHz Straddle 5.725-5.85GHz

27/06/2024

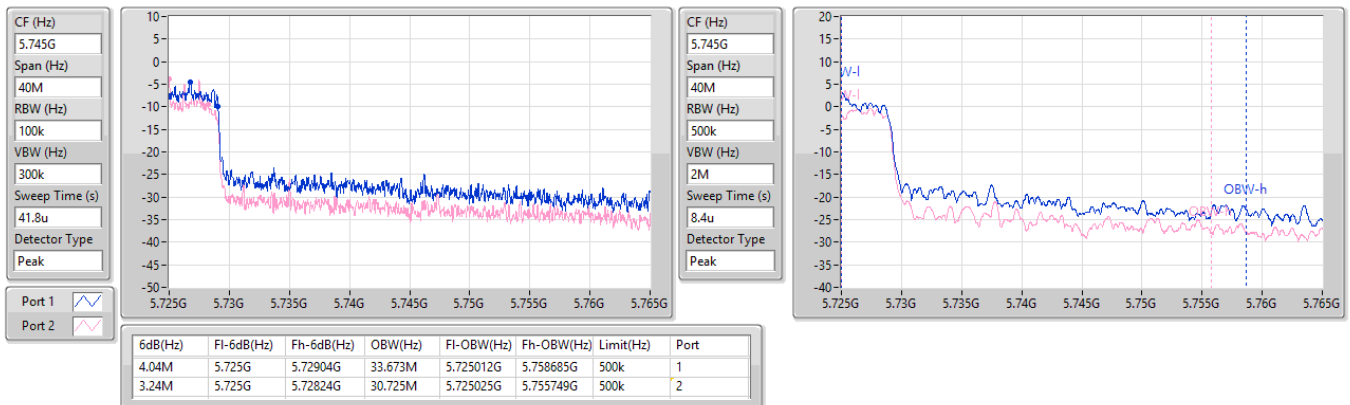


5.725-5.85GHz\_802.11ax HEW80\_Nss1,(MCS0)\_2TX

EBW

5690MHz Straddle 5.725-5.85GHz

27/06/2024

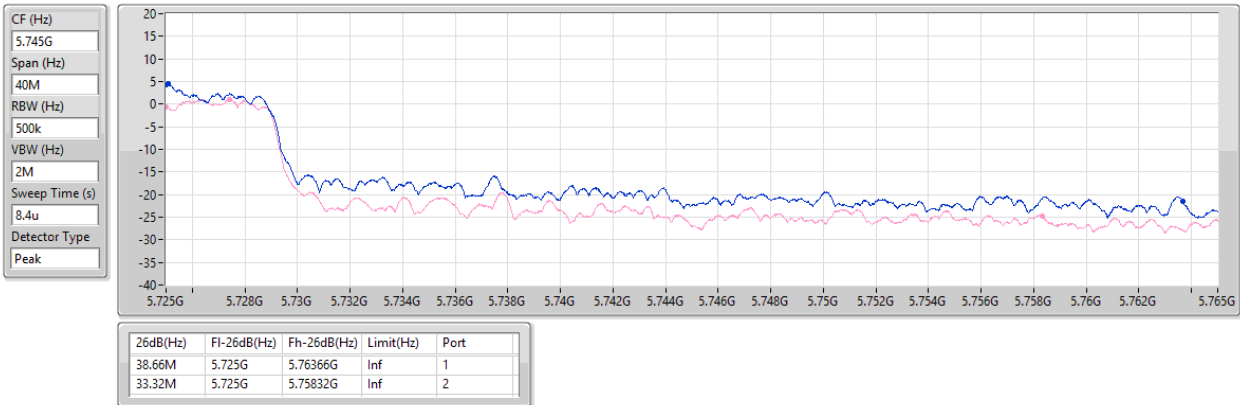


5.725-5.85GHz\_802.11ax HEW80\_Nss1,(MCS0)\_2TX

EBW

5775MHz

27/06/2024

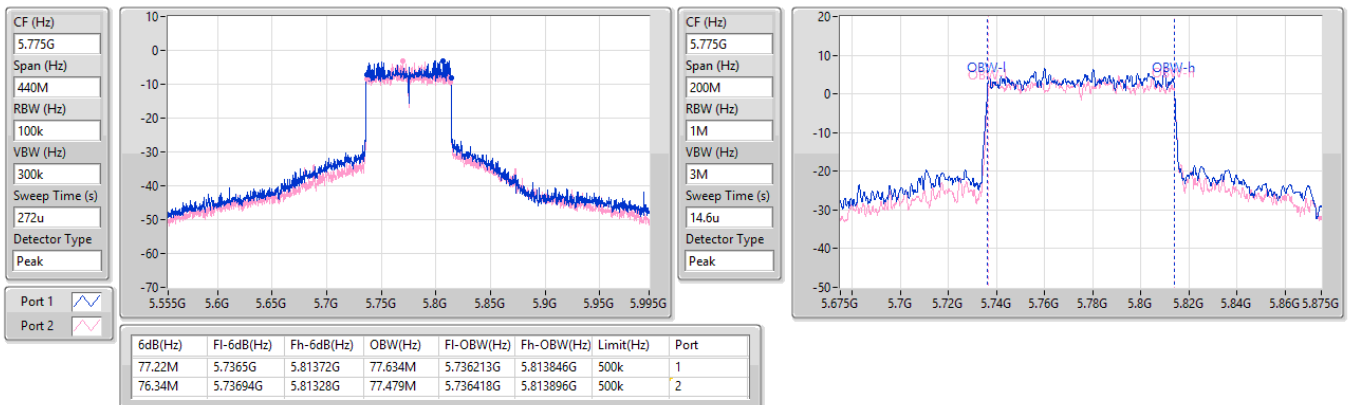


5.725-5.85GHz\_802.11ax HEW80\_Nss1,(MCS0)\_2TX

EBW

5775MHz

27/06/2024

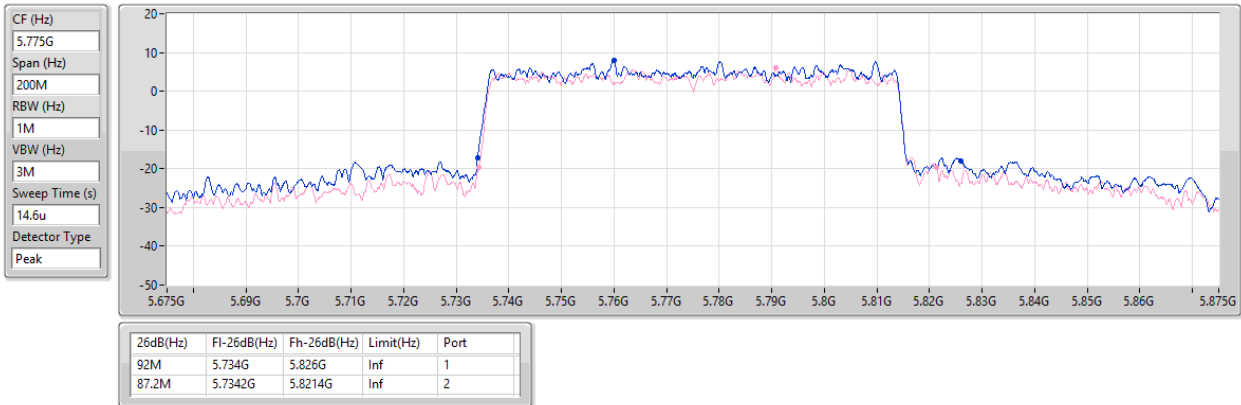

## Summary

| Mode                           | Total Power<br>(dBm) | Total Power<br>(W) | EIRP<br>(dBm) | EIRP<br>(W) |
|--------------------------------|----------------------|--------------------|---------------|-------------|
| 5.15-5.25GHz                   | -                    | -                  | -             | -           |
| 802.11a_Nss1,(6Mbps)_2TX       | 19.73                | 0.09397            | 24.38         | 0.27416     |
| 802.11ax HEW20_Nss1,(MCS0)_2TX | 21.27                | 0.13397            | 25.92         | 0.39084     |
| 802.11ax HEW40_Nss1,(MCS0)_2TX | 18.11                | 0.06471            | 22.76         | 0.18880     |
| 802.11ax HEW80_Nss1,(MCS0)_2TX | 12.16                | 0.01644            | 16.81         | 0.04797     |
| 5.25-5.35GHz                   | -                    | -                  | -             | -           |
| 802.11a_Nss1,(6Mbps)_2TX       | 19.66                | 0.09247            | 24.31         | 0.26977     |
| 802.11ax HEW20_Nss1,(MCS0)_2TX | 20.80                | 0.12023            | 25.45         | 0.35075     |
| 802.11ax HEW40_Nss1,(MCS0)_2TX | 19.17                | 0.08260            | 23.82         | 0.24099     |
| 802.11ax HEW80_Nss1,(MCS0)_2TX | 14.82                | 0.03034            | 19.47         | 0.08851     |
| 5.47-5.725GHz                  | -                    | -                  | -             | -           |
| 802.11a_Nss1,(6Mbps)_2TX       | 19.67                | 0.09268            | 24.32         | 0.27040     |
| 802.11ax HEW20_Nss1,(MCS0)_2TX | 21.05                | 0.12735            | 25.70         | 0.37154     |
| 802.11ax HEW40_Nss1,(MCS0)_2TX | 20.28                | 0.10666            | 24.93         | 0.31117     |
| 802.11ax HEW80_Nss1,(MCS0)_2TX | 17.60                | 0.05754            | 22.25         | 0.16788     |
| 5.725-5.85GHz                  | -                    | -                  | -             | -           |
| 802.11a_Nss1,(6Mbps)_2TX       | 22.00                | 0.15849            | 26.65         | 0.46238     |
| 802.11ax HEW20_Nss1,(MCS0)_2TX | 22.24                | 0.16749            | 26.89         | 0.48865     |
| 802.11ax HEW40_Nss1,(MCS0)_2TX | 21.73                | 0.14894            | 26.38         | 0.43451     |
| 802.11ax HEW80_Nss1,(MCS0)_2TX | 17.61                | 0.05768            | 22.26         | 0.16827     |

## Result

| Mode                           | Result | DG<br>(dBi) | Port 1<br>(dBm) | Port 2<br>(dBm) | Total Power<br>(dBm) | Power Limit<br>(dBm) | EIRP<br>(dBm) | EIRP Limit<br>(dBm) |
|--------------------------------|--------|-------------|-----------------|-----------------|----------------------|----------------------|---------------|---------------------|
| 802.11a_Nss1,(6Mbps)_2TX       | -      | -           | -               | -               | -                    | -                    | -             | -                   |
| 5180MHz                        | Pass   | 4.65        | 9.94            | 10.88           | 13.45                | 23.98                | 18.10         | Inf                 |
| 5200MHz                        | Pass   | 4.65        | 15.82           | 17.16           | 19.55                | 23.98                | 24.20         | Inf                 |
| 5240MHz                        | Pass   | 4.65        | 16.25           | 17.14           | 19.73                | 23.98                | 24.38         | Inf                 |
| 5260MHz                        | Pass   | 4.65        | 16.71           | 16.59           | 19.66                | 23.98                | 24.31         | 26.99               |
| 5300MHz                        | Pass   | 4.65        | 16.73           | 16.25           | 19.51                | 23.98                | 24.16         | 26.99               |
| 5320MHz                        | Pass   | 4.65        | 14.92           | 14.24           | 17.60                | 23.98                | 22.25         | 26.99               |
| 5500MHz                        | Pass   | 4.65        | 12.95           | 11.90           | 15.47                | 23.89                | 20.12         | 26.99               |
| 5580MHz                        | Pass   | 4.65        | 17.71           | 15.27           | 19.67                | 23.98                | 24.32         | 26.99               |
| 5700MHz                        | Pass   | 4.65        | 12.91           | 11.30           | 15.19                | 23.93                | 19.84         | 26.99               |
| 5720MHz Straddle 5.47-5.725GHz | Pass   | 4.65        | 16.84           | 14.08           | 18.69                | 22.66                | 23.34         | 26.99               |
| 5720MHz Straddle 5.725-5.85GHz | Pass   | 4.65        | 7.91            | 4.87            | 9.66                 | 30.00                | 14.31         | Inf                 |
| 5745MHz                        | Pass   | 4.65        | 19.53           | 18.38           | 22.00                | 30.00                | 26.65         | Inf                 |
| 5785MHz                        | Pass   | 4.65        | 16.64           | 15.41           | 19.08                | 30.00                | 23.73         | Inf                 |
| 5825MHz                        | Pass   | 4.65        | 19.74           | 18.07           | 22.00                | 30.00                | 26.65         | Inf                 |
| 802.11ax HEW20_Nss1,(MCS0)_2TX | -      | -           | -               | -               | -                    | -                    | -             | -                   |
| 5180MHz                        | Pass   | 4.65        | 11.65           | 12.66           | 15.19                | 23.98                | 19.84         | Inf                 |
| 5200MHz                        | Pass   | 4.65        | 15.43           | 16.60           | 19.06                | 23.98                | 23.71         | Inf                 |
| 5240MHz                        | Pass   | 4.65        | 17.71           | 18.74           | 21.27                | 23.98                | 25.92         | Inf                 |
| 5260MHz                        | Pass   | 4.65        | 18.30           | 17.20           | 20.80                | 23.98                | 25.45         | 26.99               |
| 5300MHz                        | Pass   | 4.65        | 16.74           | 17.03           | 19.90                | 23.98                | 24.55         | 26.99               |
| 5320MHz                        | Pass   | 4.65        | 14.45           | 14.01           | 17.25                | 23.98                | 21.90         | 26.99               |
| 5500MHz                        | Pass   | 4.65        | 12.80           | 11.79           | 15.33                | 23.98                | 19.98         | 26.99               |
| 5580MHz                        | Pass   | 4.65        | 18.40           | 16.43           | 20.54                | 23.98                | 25.19         | 26.99               |
| 5700MHz                        | Pass   | 4.65        | 12.08           | 10.64           | 14.43                | 23.98                | 19.08         | 26.99               |
| 5720MHz Straddle 5.47-5.725GHz | Pass   | 4.65        | 19.36           | 16.13           | 21.05                | 23.57                | 25.70         | 26.99               |
| 5720MHz Straddle 5.725-5.85GHz | Pass   | 4.65        | 13.33           | 9.03            | 14.70                | 30.00                | 19.35         | Inf                 |
| 5745MHz                        | Pass   | 4.65        | 19.59           | 18.63           | 22.15                | 30.00                | 26.80         | Inf                 |
| 5785MHz                        | Pass   | 4.65        | 19.75           | 18.63           | 22.24                | 30.00                | 26.89         | Inf                 |
| 5825MHz                        | Pass   | 4.65        | 19.93           | 18.30           | 22.20                | 30.00                | 26.85         | Inf                 |
| 802.11ax HEW40_Nss1,(MCS0)_2TX | -      | -           | -               | -               | -                    | -                    | -             | -                   |
| 5190MHz                        | Pass   | 4.65        | 9.59            | 10.42           | 13.04                | 23.98                | 17.69         | Inf                 |
| 5230MHz                        | Pass   | 4.65        | 14.74           | 15.44           | 18.11                | 23.98                | 22.76         | Inf                 |
| 5270MHz                        | Pass   | 4.65        | 16.00           | 16.31           | 19.17                | 23.98                | 23.82         | 26.99               |
| 5310MHz                        | Pass   | 4.65        | 10.93           | 11.15           | 14.05                | 23.98                | 18.70         | 26.99               |
| 5510MHz                        | Pass   | 4.65        | 10.51           | 9.68            | 13.13                | 23.98                | 17.78         | 26.99               |
| 5550MHz                        | Pass   | 4.65        | 16.34           | 14.56           | 18.55                | 23.98                | 23.20         | 26.99               |
| 5670MHz                        | Pass   | 4.65        | 13.61           | 12.45           | 16.08                | 23.98                | 20.73         | 26.99               |
| 5710MHz Straddle 5.47-5.725GHz | Pass   | 4.65        | 18.34           | 15.86           | 20.28                | 23.98                | 24.93         | 26.99               |
| 5710MHz Straddle 5.725-5.85GHz | Pass   | 4.65        | 10.42           | 6.89            | 12.01                | 30.00                | 16.66         | Inf                 |
| 5755MHz                        | Pass   | 4.65        | 16.96           | 16.02           | 19.53                | 30.00                | 24.18         | Inf                 |
| 5795MHz                        | Pass   | 4.65        | 19.24           | 18.12           | 21.73                | 30.00                | 26.38         | Inf                 |
| 802.11ax HEW80_Nss1,(MCS0)_2TX | -      | -           | -               | -               | -                    | -                    | -             | -                   |
| 5210MHz                        | Pass   | 4.65        | 8.63            | 9.61            | 12.16                | 23.98                | 16.81         | Inf                 |
| 5290MHz                        | Pass   | 4.65        | 11.68           | 11.93           | 14.82                | 23.98                | 19.47         | 26.99               |
| 5530MHz                        | Pass   | 4.65        | 8.72            | 7.71            | 11.25                | 23.98                | 15.90         | 26.99               |
| 5610MHz                        | Pass   | 4.65        | 14.85           | 13.23           | 17.13                | 23.98                | 21.78         | 26.99               |
| 5690MHz Straddle 5.47-5.725GHz | Pass   | 4.65        | 15.39           | 13.62           | 17.60                | 23.98                | 22.25         | 26.99               |
| 5690MHz Straddle 5.725-5.85GHz | Pass   | 4.65        | 2.81            | 0.65            | 4.87                 | 30.00                | 9.52          | Inf                 |
| 5775MHz                        | Pass   | 4.65        | 15.08           | 14.07           | 17.61                | 30.00                | 22.26         | Inf                 |


DG = Directional Gain; Port X = Port X output power  
Inf = There's no restriction for the limit.

5.47-5.725GHz\_802.11a\_Nss1,(6Mbps)\_2TX

AV Power

5720MHz Straddle 5.47-5.725GHz\_TX

27/06/2024

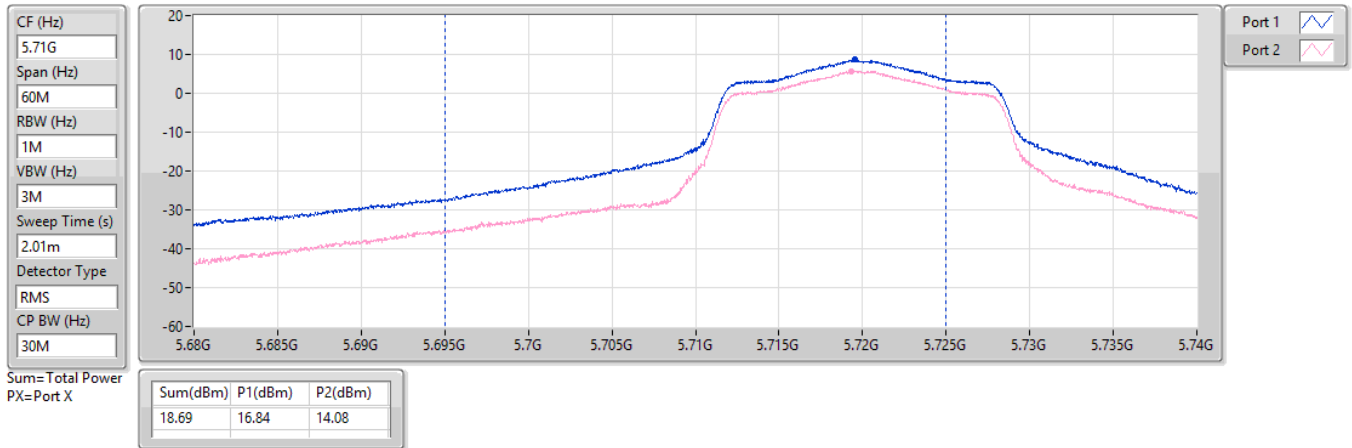


5.725-5.85GHz\_802.11a\_Nss1,(6Mbps)\_2TX

AV Power

5720MHz Straddle 5.725-5.85GHz\_TX

27/06/2024

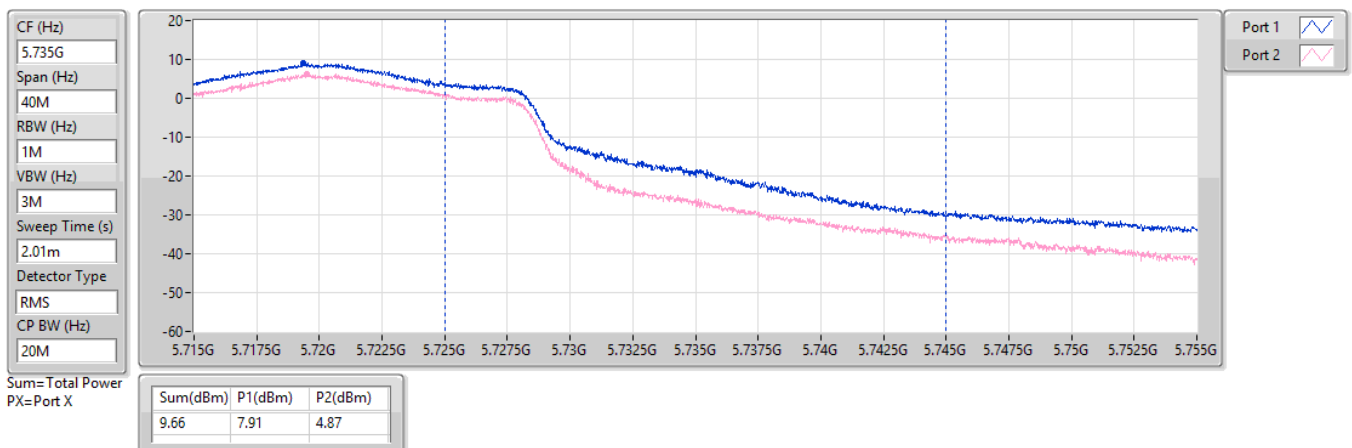


5.47-5.725GHz\_802.11ax HEW20\_Nss1,(MCS0)\_2TX

AV Power

5720MHz Straddle 5.47-5.725GHz\_TX

29/06/2024

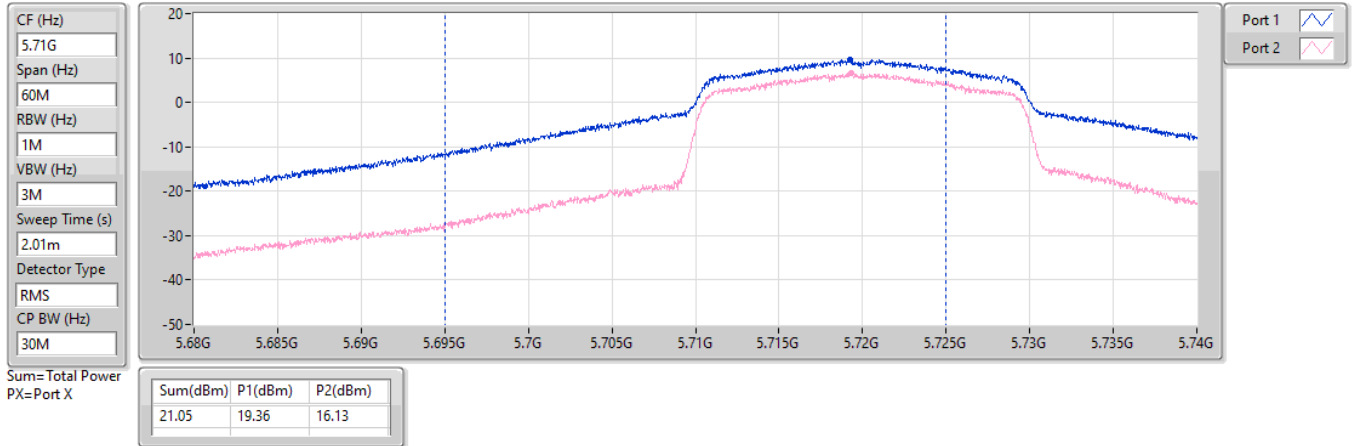


5.725-5.85GHz\_802.11ax HEW20\_Nss1,(MCS0)\_2TX

AV Power

5720MHz Straddle 5.725-5.85GHz\_TX

29/06/2024

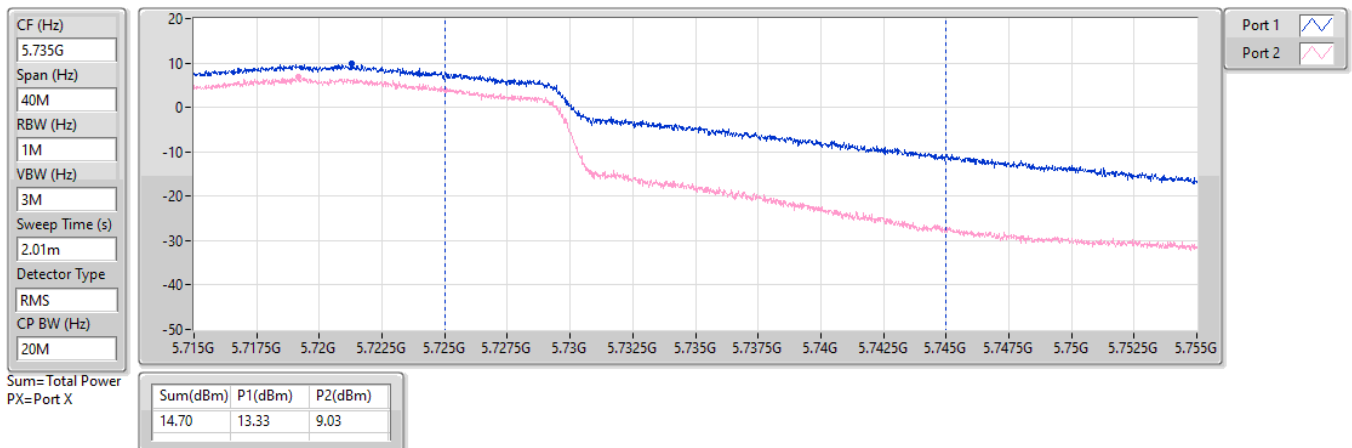


5.47-5.725GHz\_802.11ax HEW40\_Nss1,(MCS0)\_2TX

AV Power

5710MHz Straddle 5.47-5.725GHz\_TX

29/06/2024

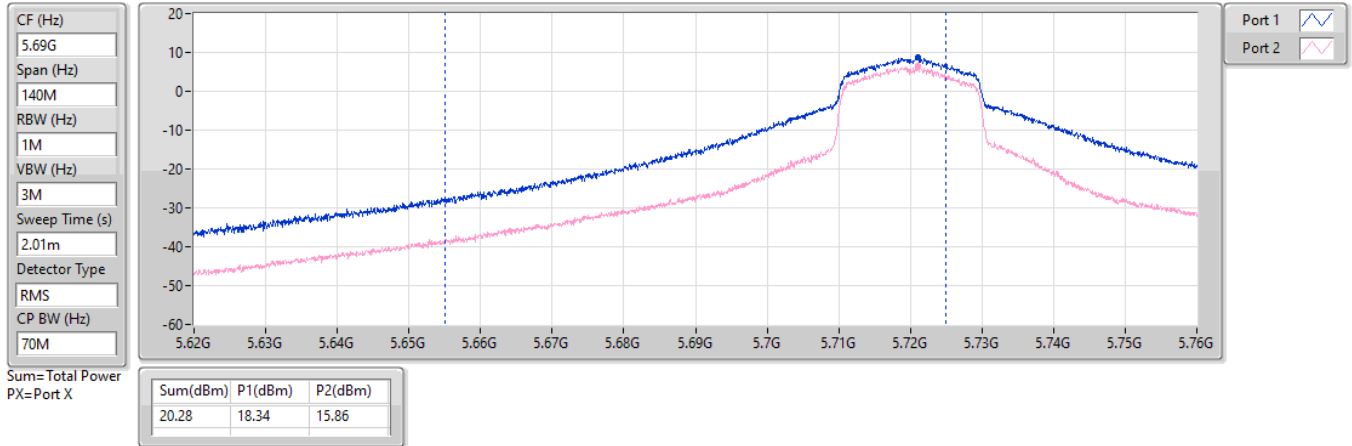


5.725-5.85GHz\_802.11ax HEW40\_Nss1,(MCS0)\_2TX

AV Power

5710MHz Straddle 5.725-5.85GHz\_TX

29/06/2024

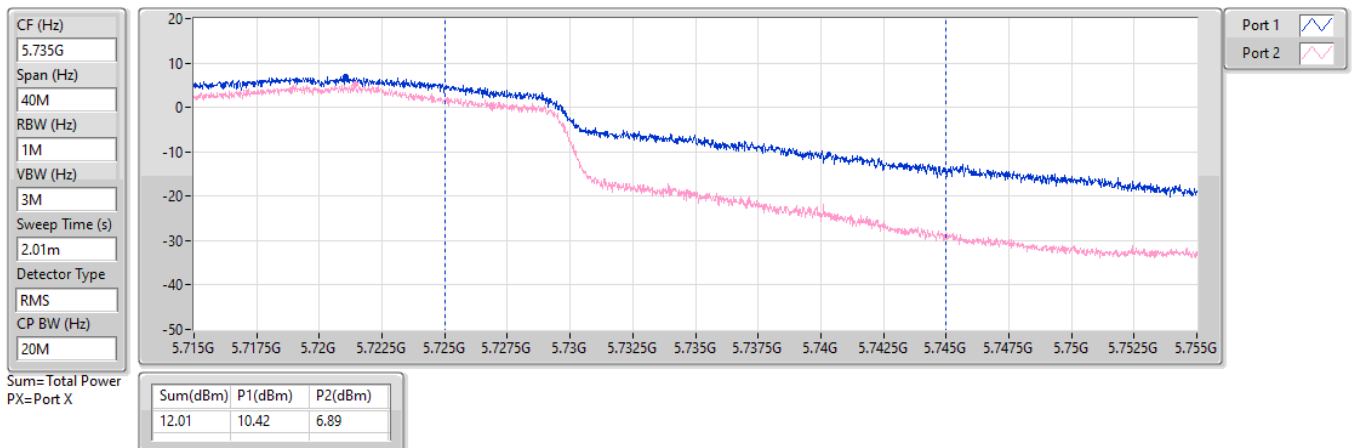


5.47-5.725GHz\_802.11ax HEW80\_Nss1,(MCS0)\_2TX

AV Power

5690MHz Straddle 5.47-5.725GHz\_TX

27/06/2024

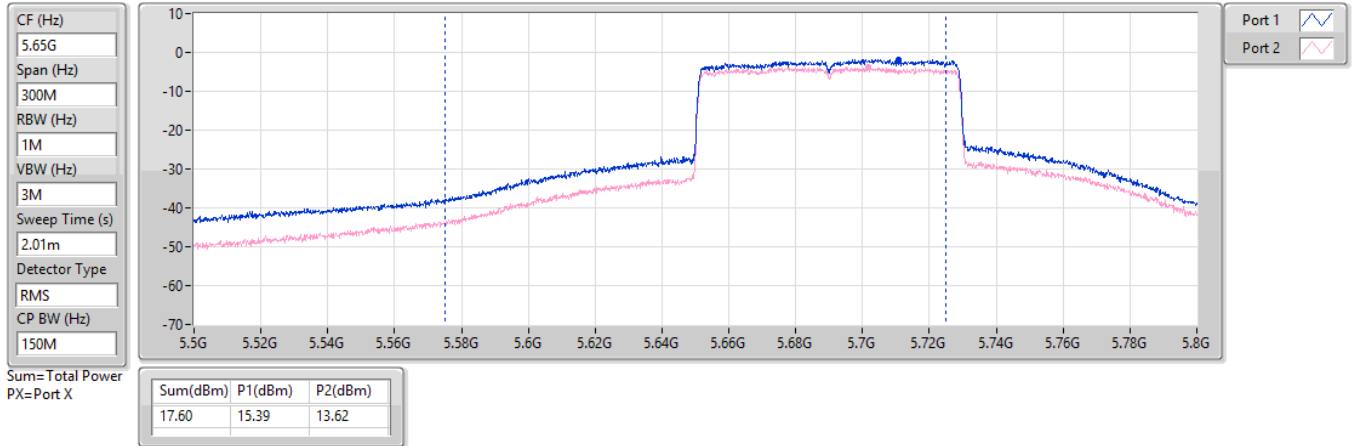


5.725-5.85GHz\_802.11ax HEW80\_Nss1,(MCS0)\_2TX

AV Power

5690MHz Straddle 5.725-5.85GHz\_TX

27/06/2024

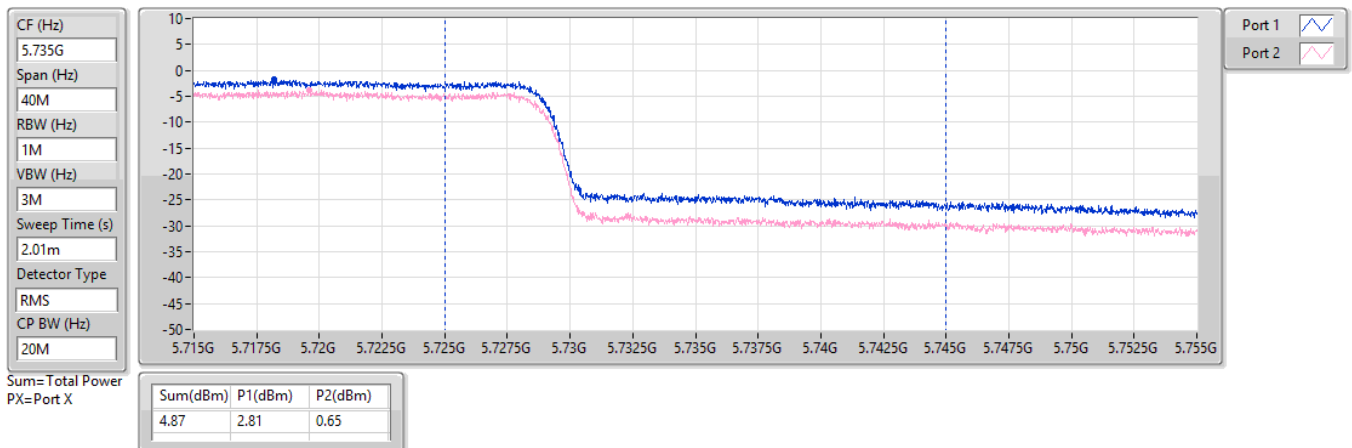

## Summary

| Mode                           | PD<br>(dBm/RBW) |
|--------------------------------|-----------------|
| 5.15-5.25GHz                   | -               |
| 802.11a_Nss1,(6Mbps)_2TX       | 9.23            |
| 802.11ax HEW20_Nss1,(MCS0)_2TX | 9.08            |
| 802.11ax HEW40_Nss1,(MCS0)_2TX | 1.30            |
| 802.11ax HEW80_Nss1,(MCS0)_2TX | -7.59           |
| 5.25-5.35GHz                   | -               |
| 802.11a_Nss1,(6Mbps)_2TX       | 9.21            |
| 802.11ax HEW20_Nss1,(MCS0)_2TX | 8.70            |
| 802.11ax HEW40_Nss1,(MCS0)_2TX | 2.35            |
| 802.11ax HEW80_Nss1,(MCS0)_2TX | -4.94           |
| 5.47-5.725GHz                  | -               |
| 802.11a_Nss1,(6Mbps)_2TX       | 9.15            |
| 802.11ax HEW20_Nss1,(MCS0)_2TX | 8.68            |
| 802.11ax HEW40_Nss1,(MCS0)_2TX | 8.01            |
| 802.11ax HEW80_Nss1,(MCS0)_2TX | -1.59           |
| 5.725-5.85GHz                  | -               |
| 802.11a_Nss1,(6Mbps)_2TX       | 10.17           |
| 802.11ax HEW20_Nss1,(MCS0)_2TX | 8.08            |
| 802.11ax HEW40_Nss1,(MCS0)_2TX | 4.86            |
| 802.11ax HEW80_Nss1,(MCS0)_2TX | -3.52           |

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;

**Result**

| Mode                           | Result | DG<br>(dBi) | Port 1<br>(dBm/RBW) | Port 2<br>(dBm/RBW) | PD<br>(dBm/RBW) | PD Limit<br>(dBm/RBW) |
|--------------------------------|--------|-------------|---------------------|---------------------|-----------------|-----------------------|
| 802.11a_Nss1,(6Mbps)_2TX       | -      | -           | -                   | -                   | -               | -                     |
| 5180MHz                        | Pass   | 7.66        | -0.55               | 0.43                | 2.96            | 9.34                  |
| 5200MHz                        | Pass   | 7.66        | 5.30                | 6.86                | 9.16            | 9.34                  |
| 5240MHz                        | Pass   | 7.66        | 5.67                | 6.71                | 9.23            | 9.34                  |
| 5260MHz                        | Pass   | 7.66        | 6.12                | 6.05                | 9.09            | 9.34                  |
| 5300MHz                        | Pass   | 7.66        | 6.25                | 6.22                | 9.21            | 9.34                  |
| 5320MHz                        | Pass   | 7.66        | 4.35                | 3.75                | 7.05            | 9.34                  |
| 5500MHz                        | Pass   | 7.66        | 2.73                | 1.48                | 5.08            | 9.34                  |
| 5580MHz                        | Pass   | 7.66        | 7.13                | 4.77                | 9.12            | 9.34                  |
| 5700MHz                        | Pass   | 7.66        | 2.63                | 0.98                | 4.89            | 9.34                  |
| 5720MHz Straddle 5.47-5.725GHz | Pass   | 7.66        | 7.33                | 4.50                | 9.15            | 9.34                  |
| 5720MHz Straddle 5.725-5.85GHz | Pass   | 7.66        | 0.51                | -2.26               | 2.35            | 28.34                 |
| 5745MHz                        | Pass   | 7.66        | 8.32                | 7.08                | 9.90            | 28.34                 |
| 5785MHz                        | Pass   | 7.66        | 4.16                | 2.35                | 6.34            | 28.34                 |
| 5825MHz                        | Pass   | 7.66        | 8.20                | 7.58                | 10.17           | 28.34                 |
| 802.11ax HEW20_Nss1,(MCS0)_2TX | -      | -           | -                   | -                   | -               | -                     |
| 5180MHz                        | Pass   | 7.66        | -0.83               | 0.23                | 2.70            | 9.34                  |
| 5200MHz                        | Pass   | 7.66        | 2.95                | 4.19                | 6.62            | 9.34                  |
| 5240MHz                        | Pass   | 7.66        | 5.57                | 6.62                | 9.08            | 9.34                  |
| 5260MHz                        | Pass   | 7.66        | 6.10                | 5.25                | 8.70            | 9.34                  |
| 5300MHz                        | Pass   | 7.66        | 4.88                | 4.91                | 7.90            | 9.34                  |
| 5320MHz                        | Pass   | 7.66        | 2.24                | 1.50                | 4.90            | 9.34                  |
| 5500MHz                        | Pass   | 7.66        | 0.62                | -0.56               | 3.05            | 9.34                  |
| 5580MHz                        | Pass   | 7.66        | 6.18                | 4.25                | 8.32            | 9.34                  |
| 5700MHz                        | Pass   | 7.66        | -0.40               | -1.66               | 1.98            | 9.34                  |
| 5720MHz Straddle 5.47-5.725GHz | Pass   | 7.66        | 6.99                | 3.90                | 8.68            | 9.34                  |
| 5720MHz Straddle 5.725-5.85GHz | Pass   | 7.66        | 3.71                | 0.12                | 5.21            | 28.34                 |
| 5745MHz                        | Pass   | 7.66        | 6.29                | 3.93                | 8.02            | 28.34                 |
| 5785MHz                        | Pass   | 7.66        | 5.40                | 4.78                | 8.02            | 28.34                 |
| 5825MHz                        | Pass   | 7.66        | 5.39                | 4.73                | 8.08            | 28.34                 |
| 802.11ax HEW40_Nss1,(MCS0)_2TX | -      | -           | -                   | -                   | -               | -                     |
| 5190MHz                        | Pass   | 7.66        | -7.34               | -6.20               | -3.74           | 9.34                  |
| 5230MHz                        | Pass   | 7.66        | -2.12               | -1.32               | 1.30            | 9.34                  |
| 5270MHz                        | Pass   | 7.66        | -0.82               | -0.41               | 2.35            | 9.34                  |
| 5310MHz                        | Pass   | 7.66        | -5.61               | -5.64               | -2.70           | 9.34                  |
| 5510MHz                        | Pass   | 7.66        | -6.15               | -7.03               | -3.62           | 9.34                  |
| 5550MHz                        | Pass   | 7.66        | -0.53               | -2.29               | 1.65            | 9.34                  |
| 5670MHz                        | Pass   | 7.66        | -3.27               | -4.33               | -0.80           | 9.34                  |
| 5710MHz Straddle 5.47-5.725GHz | Pass   | 7.66        | 6.41                | 3.21                | 8.01            | 9.34                  |
| 5710MHz Straddle 5.725-5.85GHz | Pass   | 7.66        | 3.16                | -0.04               | 4.86            | 28.34                 |
| 5755MHz                        | Pass   | 7.66        | -1.41               | -2.25               | 1.20            | 28.34                 |
| 5795MHz                        | Pass   | 7.66        | 0.45                | 0.25                | 3.24            | 28.34                 |
| 802.11ax HEW80_Nss1,(MCS0)_2TX | -      | -           | -                   | -                   | -               | -                     |
| 5210MHz                        | Pass   | 7.66        | -10.95              | -10.26              | -7.59           | 9.34                  |
| 5290MHz                        | Pass   | 7.66        | -8.10               | -7.75               | -4.94           | 9.34                  |
| 5530MHz                        | Pass   | 7.66        | -11.07              | -11.98              | -8.52           | 9.34                  |
| 5610MHz                        | Pass   | 7.66        | -4.66               | -6.31               | -2.41           | 9.34                  |
| 5690MHz Straddle 5.47-5.725GHz | Pass   | 7.66        | -3.72               | -5.66               | -1.59           | 9.34                  |
| 5690MHz Straddle 5.725-5.85GHz | Pass   | 7.66        | -5.62               | -7.64               | -3.52           | 28.34                 |
| 5775MHz                        | Pass   | 7.66        | -6.19               | -7.21               | -3.68           | 28.34                 |


DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;  
 PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;  
 Inf = There's no restriction for the limit.

5.15-5.25GHz\_802.11a\_Nss1,(6Mbps)\_2TX

PSD

5180MHz

27/06/2024

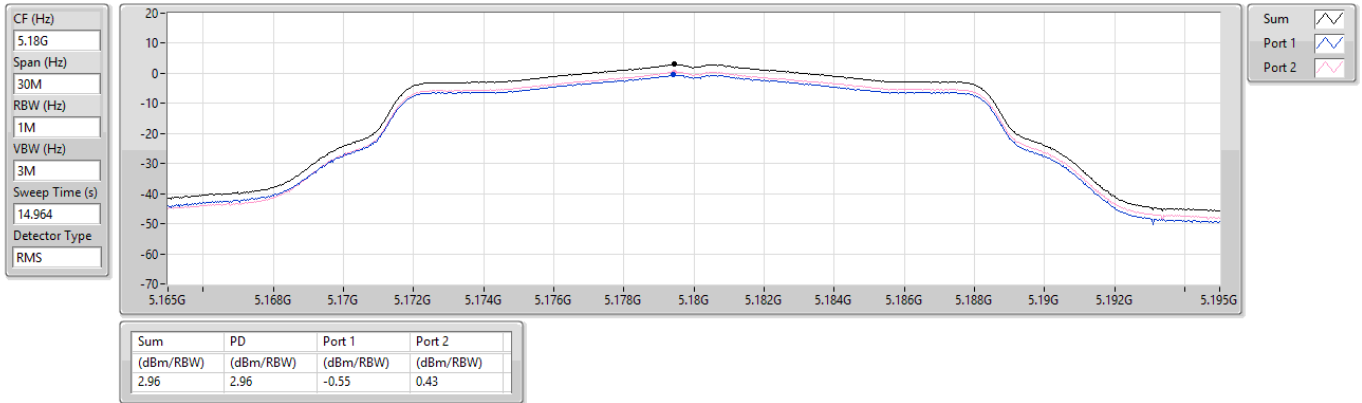


5.15-5.25GHz\_802.11a\_Nss1,(6Mbps)\_2TX

PSD

5200MHz

27/06/2024

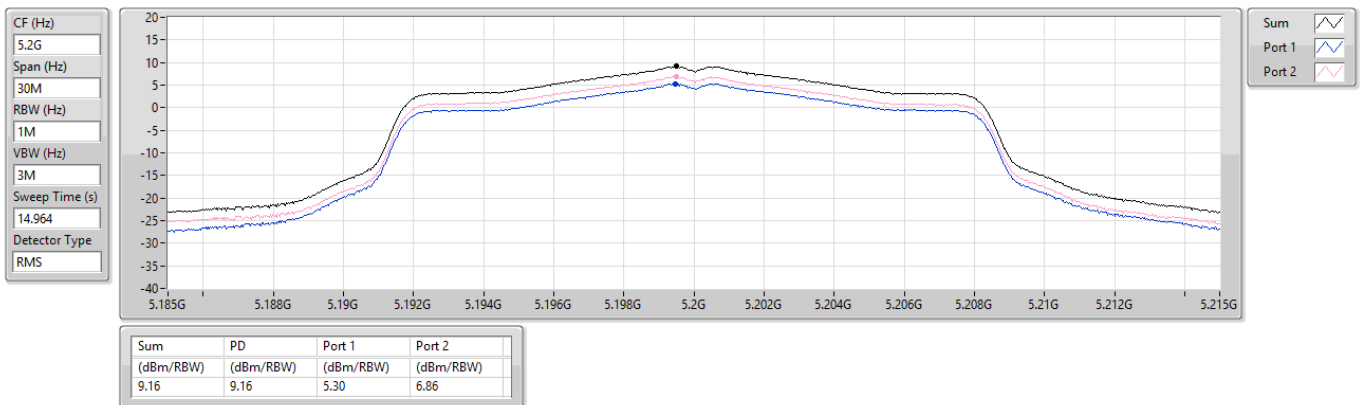


## 5.15-5.25GHz\_802.11a\_Nss1,(6Mbps)\_2TX

PSD

5240MHz

27/06/2024

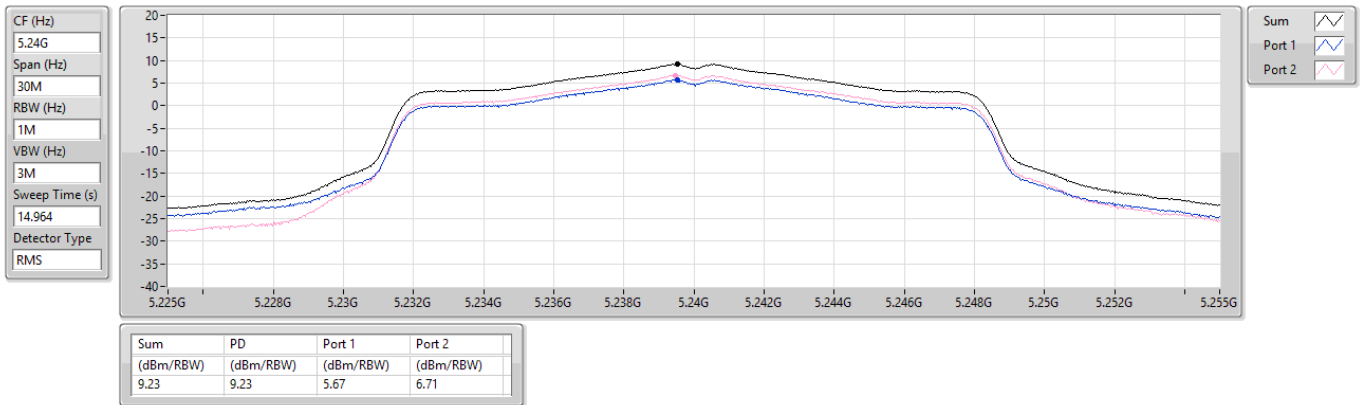


## 5.25-5.35GHz\_802.11a\_Nss1,(6Mbps)\_2TX

PSD

5260MHz

27/06/2024

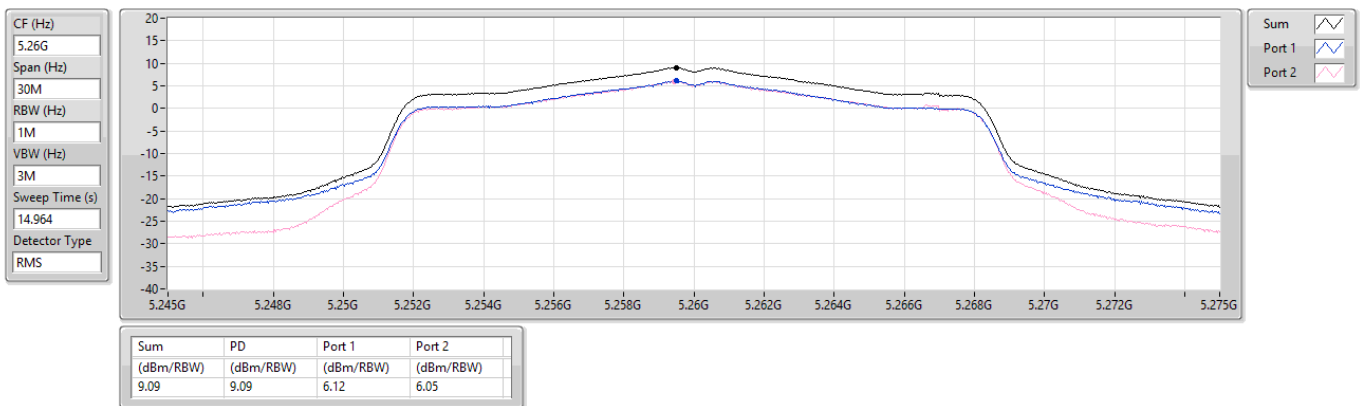


5.25-5.35GHz\_802.11a\_Nss1,(6Mbps)\_2TX

PSD

5300MHz

27/06/2024

CF (Hz)  
5.3G  
Span (Hz)  
30M  
RBW (Hz)  
1M  
VBW (Hz)  
3M  
Sweep Time (s)  
14.964  
Detector Type  
RMS

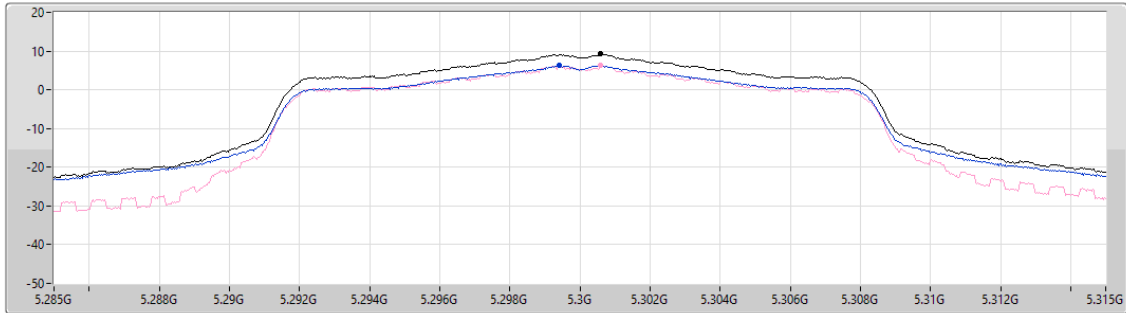

| Sum      | PD       | Port 1   | Port 2   |
|----------|----------|----------|----------|
| (dBm/Hz) | (dBm/Hz) | (dBm/Hz) | (dBm/Hz) |
| 9.21     | 9.21     | 6.25     | 6.22     |


5.25-5.35GHz\_802.11a\_Nss1,(6Mbps)\_2TX

PSD

5320MHz

27/06/2024

CF (Hz)  
5.32G  
Span (Hz)  
30M  
RBW (Hz)  
1M  
VBW (Hz)  
3M  
Sweep Time (s)  
14.964  
Detector Type  
RMS

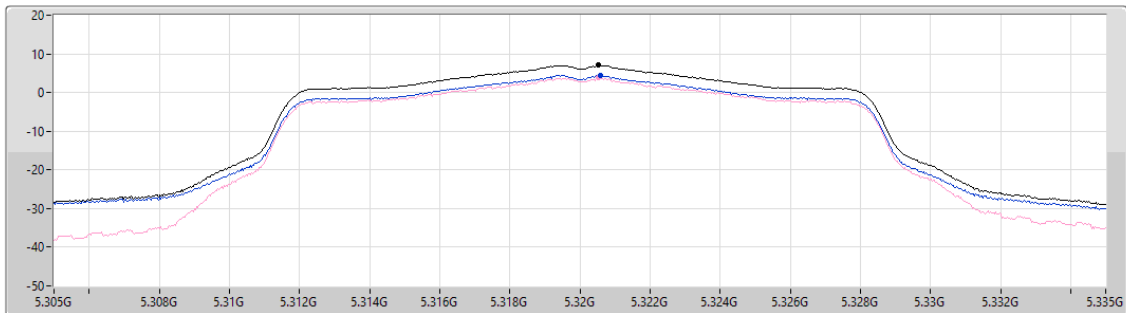


| Sum      | PD       | Port 1   | Port 2   |
|----------|----------|----------|----------|
| (dBm/Hz) | (dBm/Hz) | (dBm/Hz) | (dBm/Hz) |
| 7.05     | 7.05     | 4.35     | 3.75     |

5.47-5.725GHz\_802.11a\_Nss1,(6Mbps)\_2TX

PSD

5500MHz

27/06/2024

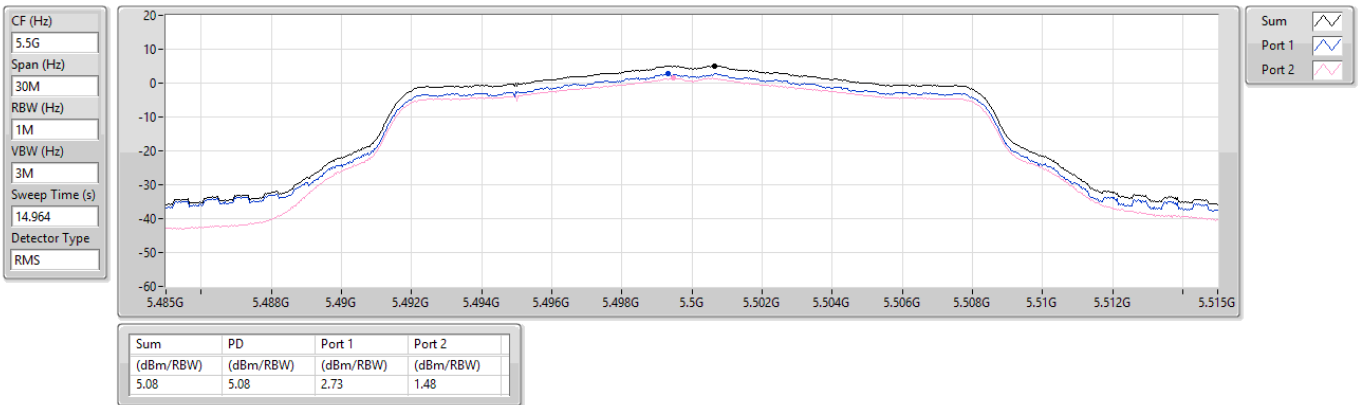


5.47-5.725GHz\_802.11a\_Nss1,(6Mbps)\_2TX

PSD

5580MHz

27/06/2024

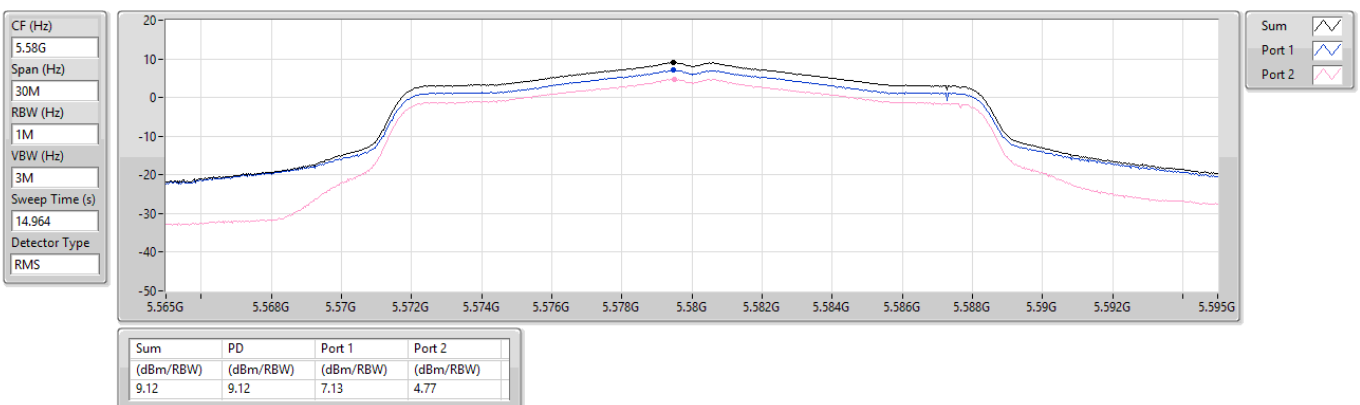


5.47-5.725GHz\_802.11a\_Nss1,(6Mbps)\_2TX

PSD

5700MHz

27/06/2024

CF (Hz)  
5.7G  
Span (Hz)  
30M  
RBW (Hz)  
1M  
VBW (Hz)  
3M  
Sweep Time (s)  
14.964  
Detector Type  
RMS

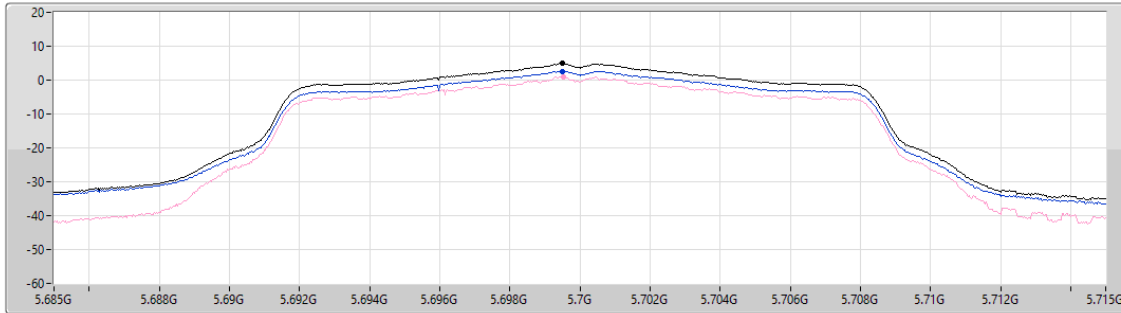

| Sum      | PD       | Port 1   | Port 2   |
|----------|----------|----------|----------|
| (dBm/Hz) | (dBm/Hz) | (dBm/Hz) | (dBm/Hz) |
| 4.89     | 4.89     | 2.63     | 0.98     |

Sum  
Port 1  
Port 2


5.47-5.725GHz\_802.11a\_Nss1,(6Mbps)\_2TX

PSD

5720MHz Straddle 5.47-5.725GHz

27/06/2024

CF (Hz)  
5.71G  
Span (Hz)  
60M  
RBW (Hz)  
1M  
VBW (Hz)  
3M  
Sweep Time (s)  
14.964  
Detector Type  
RMS

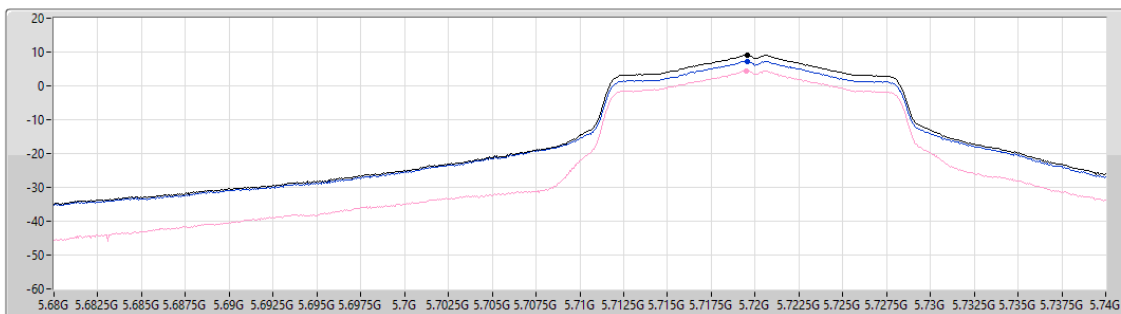

| Sum      | PD       | Port 1   | Port 2   |
|----------|----------|----------|----------|
| (dBm/Hz) | (dBm/Hz) | (dBm/Hz) | (dBm/Hz) |
| 9.15     | 9.15     | 7.33     | 4.50     |


Sum  
Port 1  
Port 2

5.725-5.85GHz\_802.11a\_Nss1,(6Mbps)\_2TX

PSD

5720MHz Straddle 5.725-5.85GHz

27/06/2024

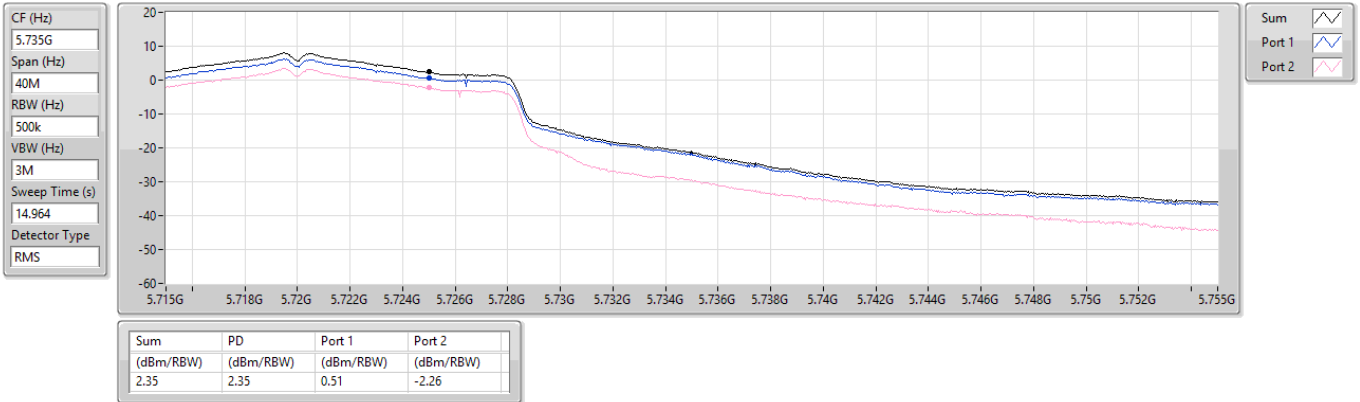


5.725-5.85GHz\_802.11a\_Nss1,(6Mbps)\_2TX

PSD

5745MHz

27/06/2024

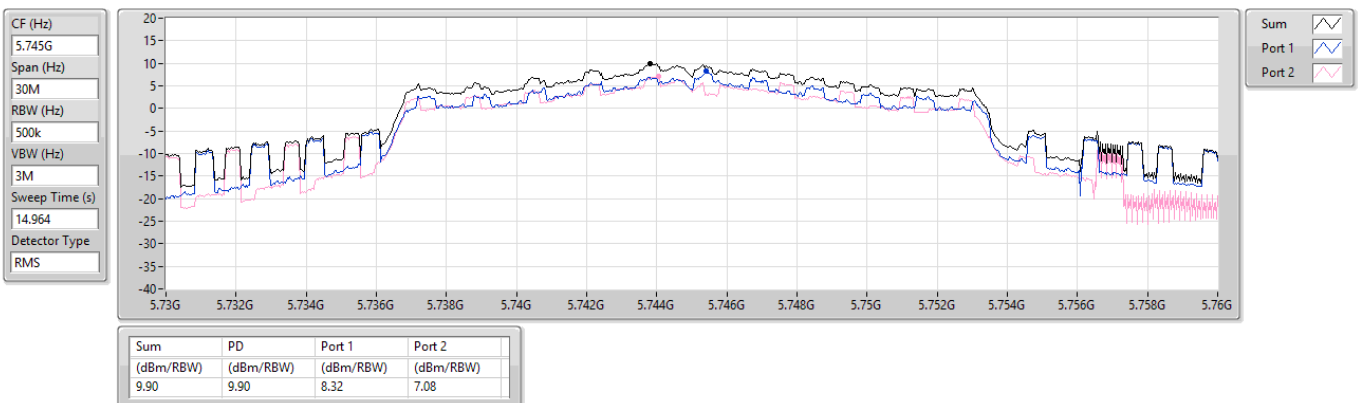


5.725-5.85GHz\_802.11a\_Nss1,(6Mbps)\_2TX

PSD

5785MHz

27/06/2024

CF (Hz)  
5.785G  
Span (Hz)  
30M  
RBW (Hz)  
500k  
VBW (Hz)  
3M  
Sweep Time (s)  
14.964  
Detector Type  
RMS

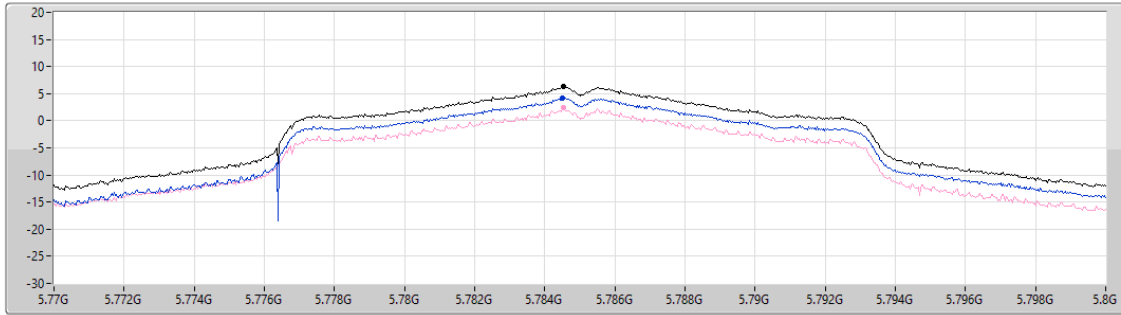

| Sum       | PD        | Port 1    | Port 2    |
|-----------|-----------|-----------|-----------|
| (dBm/RBW) | (dBm/RBW) | (dBm/RBW) | (dBm/RBW) |
| 6.34      | 6.34      | 4.16      | 2.35      |

Sum  
Port 1  
Port 2


5.725-5.85GHz\_802.11a\_Nss1,(6Mbps)\_2TX

PSD

5825MHz

27/06/2024

CF (Hz)  
5.825G  
Span (Hz)  
30M  
RBW (Hz)  
500k  
VBW (Hz)  
3M  
Sweep Time (s)  
14.964  
Detector Type  
RMS

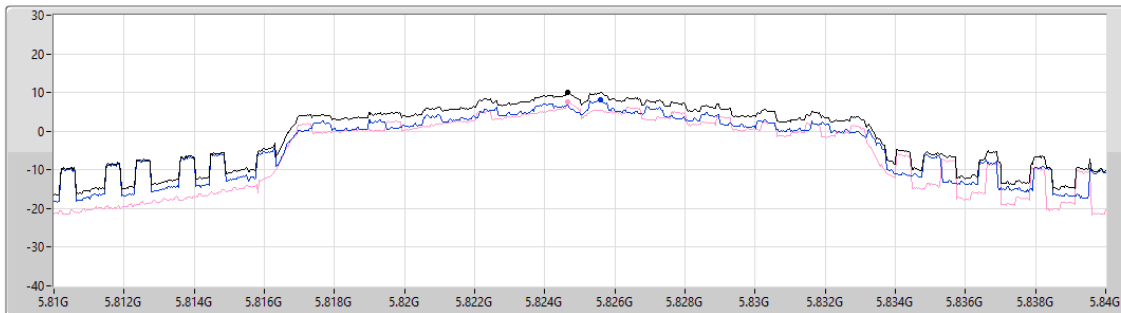

| Sum       | PD        | Port 1    | Port 2    |
|-----------|-----------|-----------|-----------|
| (dBm/RBW) | (dBm/RBW) | (dBm/RBW) | (dBm/RBW) |
| 10.17     | 10.17     | 8.20      | 7.58      |

Sum  
Port 1  
Port 2


5.15-5.25GHz\_802.11ax\_HEW20\_Nss1,(MCS0)\_2TX

PSD

5180MHz

27/06/2024

CF (Hz)  
5.18G  
Span (Hz)  
30M  
RBW (Hz)  
1M  
VBW (Hz)  
3M  
Sweep Time (s)  
15.19  
Detector Type  
RMS

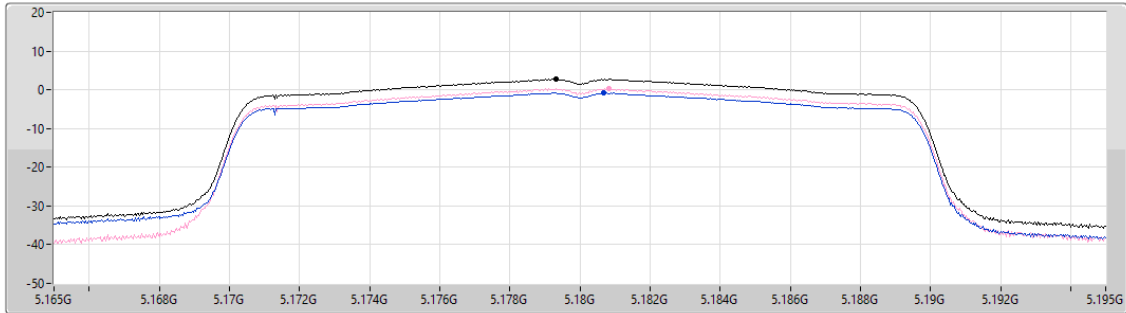

| Sum (dBm/RBW) | PD (dBm/RBW) | Port 1 (dBm/RBW) | Port 2 (dBm/RBW) |
|---------------|--------------|------------------|------------------|
| 2.70          | 2.70         | -0.83            | 0.23             |

Sum  
Port 1  
Port 2


5.15-5.25GHz\_802.11ax\_HEW20\_Nss1,(MCS0)\_2TX

PSD

5200MHz

27/06/2024

CF (Hz)  
5.2G  
Span (Hz)  
30M  
RBW (Hz)  
1M  
VBW (Hz)  
3M  
Sweep Time (s)  
15.19  
Detector Type  
RMS

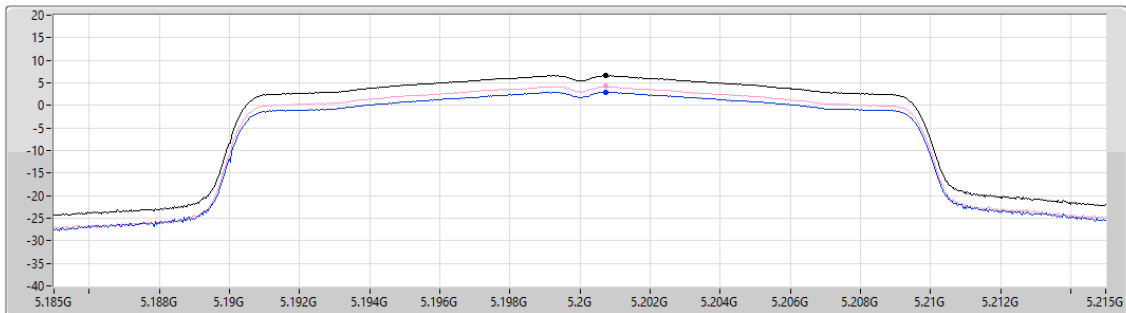

| Sum (dBm/RBW) | PD (dBm/RBW) | Port 1 (dBm/RBW) | Port 2 (dBm/RBW) |
|---------------|--------------|------------------|------------------|
| 6.62          | 6.62         | 2.95             | 4.19             |

Sum  
Port 1  
Port 2


## 5.15-5.25GHz\_802.11ax HEW20\_Nss1,(MCS0)\_2TX

PSD

5240MHz

29/06/2024

CF (Hz)  
5.24G  
Span (Hz)  
30M  
RBW (Hz)  
1M  
VBW (Hz)  
3M  
Sweep Time (s)  
15.19  
Detector Type  
RMS

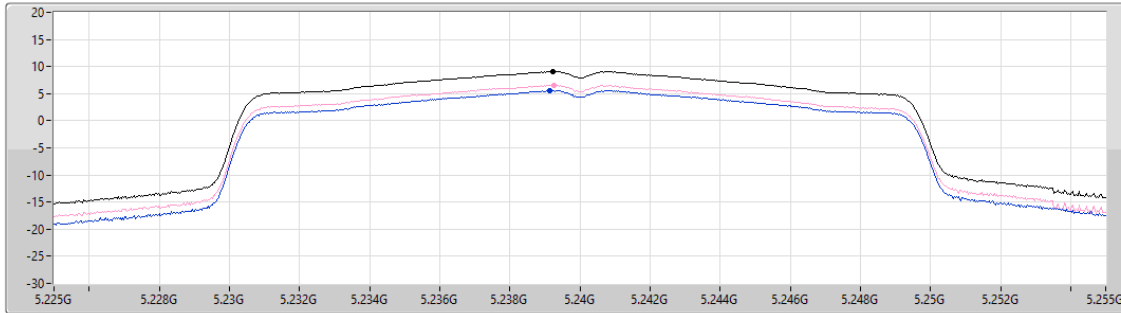

| Sum      | PD       | Port 1   | Port 2   |
|----------|----------|----------|----------|
| (dBm/Hz) | (dBm/Hz) | (dBm/Hz) | (dBm/Hz) |
| 9.08     | 9.08     | 5.57     | 6.62     |

Sum  
Port 1  
Port 2


## 5.25-5.35GHz\_802.11ax HEW20\_Nss1,(MCS0)\_2TX

PSD

5260MHz

29/06/2024

CF (Hz)  
5.26G  
Span (Hz)  
30M  
RBW (Hz)  
1M  
VBW (Hz)  
3M  
Sweep Time (s)  
15.19  
Detector Type  
RMS

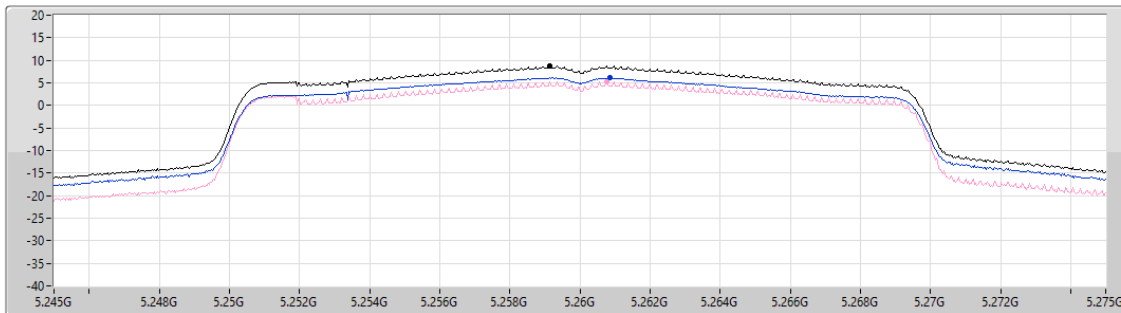

| Sum      | PD       | Port 1   | Port 2   |
|----------|----------|----------|----------|
| (dBm/Hz) | (dBm/Hz) | (dBm/Hz) | (dBm/Hz) |
| 8.70     | 8.70     | 6.10     | 5.25     |


Sum  
Port 1  
Port 2

5.25-5.35GHz\_802.11ax HEW20\_Nss1,(MCS0)\_2TX

PSD

5300MHz

29/06/2024

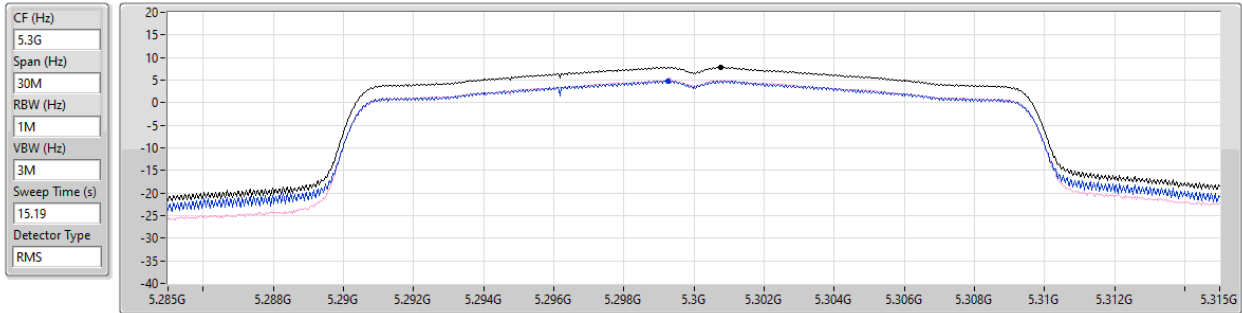


5.25-5.35GHz\_802.11ax HEW20\_Nss1,(MCS0)\_2TX

PSD

5320MHz

27/06/2024

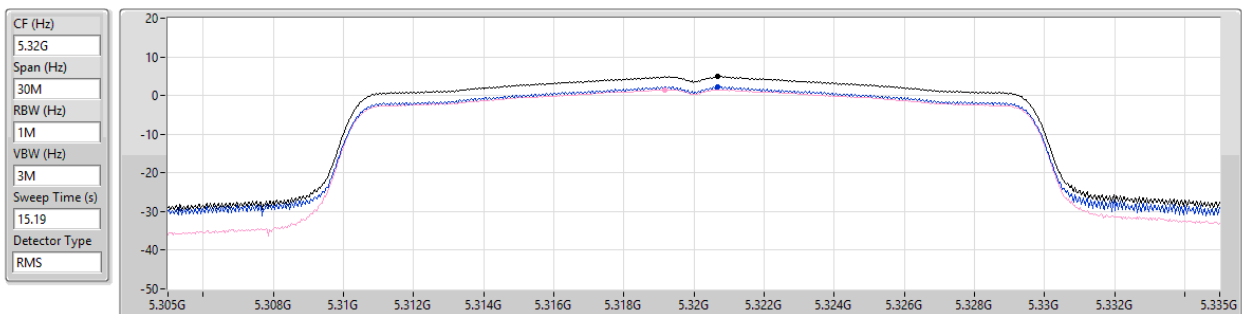


5.47-5.725GHz\_802.11ax HEW20\_Nss1,(MCS0)\_2TX

PSD

5500MHz

27/06/2024

CF (Hz)  
5.5G  
Span (Hz)  
30M  
RBW (Hz)  
1M  
VBW (Hz)  
3M  
Sweep Time (s)  
15.19  
Detector Type  
RMS

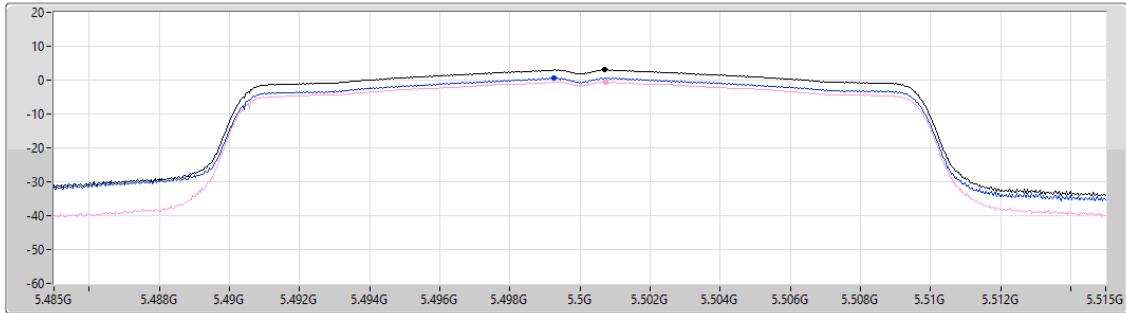

| Sum      | PD       | Port 1   | Port 2   |
|----------|----------|----------|----------|
| (dBm/Hz) | (dBm/Hz) | (dBm/Hz) | (dBm/Hz) |
| 3.05     | 3.05     | 0.62     | -0.56    |

Sum  
Port 1  
Port 2


5.47-5.725GHz\_802.11ax HEW20\_Nss1,(MCS0)\_2TX

PSD

5580MHz

29/06/2024

CF (Hz)  
5.58G  
Span (Hz)  
30M  
RBW (Hz)  
1M  
VBW (Hz)  
3M  
Sweep Time (s)  
15.19  
Detector Type  
RMS

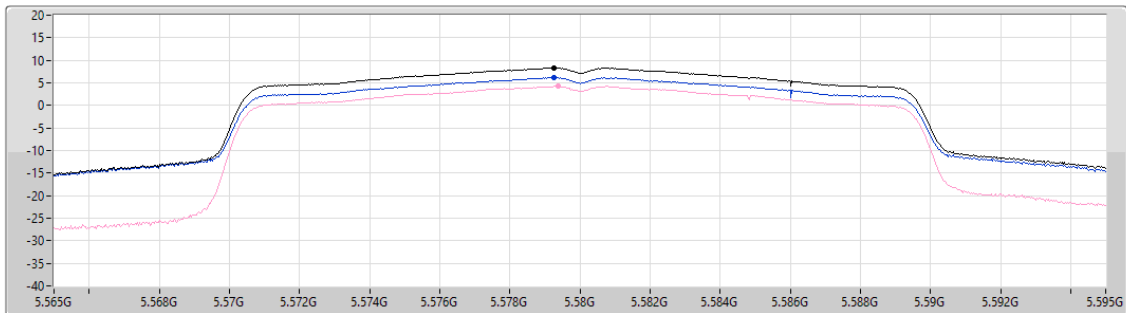

| Sum      | PD       | Port 1   | Port 2   |
|----------|----------|----------|----------|
| (dBm/Hz) | (dBm/Hz) | (dBm/Hz) | (dBm/Hz) |
| 8.32     | 8.32     | 6.18     | 4.25     |

Sum  
Port 1  
Port 2


5.47-5.725GHz\_802.11ax HEW20\_Nss1,(MCS0)\_2TX

PSD

5700MHz

27/06/2024

CF (Hz)  
5.7G  
Span (Hz)  
30M  
RBW (Hz)  
1M  
VBW (Hz)  
3M  
Sweep Time (s)  
15.19  
Detector Type  
RMS

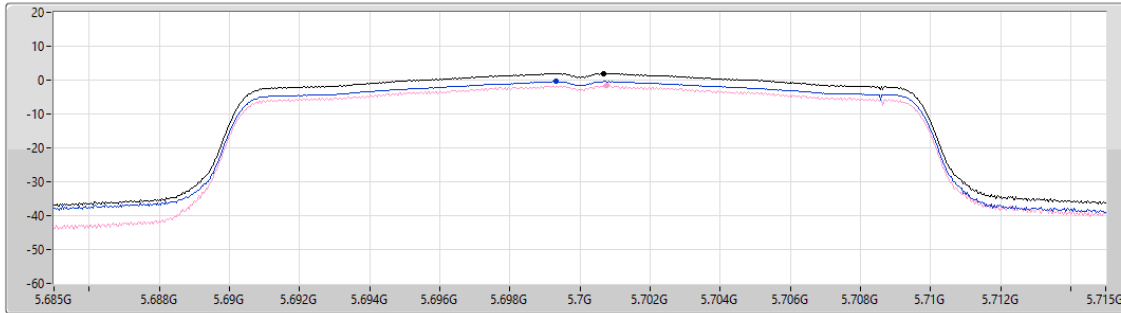

Sum  
Port 1  
Port 2

| Sum       | PD        | Port 1    | Port 2    |
|-----------|-----------|-----------|-----------|
| (dBm/RBW) | (dBm/RBW) | (dBm/RBW) | (dBm/RBW) |
| 1.98      | 1.98      | -0.40     | -1.66     |


5.47-5.725GHz\_802.11ax HEW20\_Nss1,(MCS0)\_2TX

PSD

5720MHz Straddle 5.47-5.725GHz

29/06/2024

CF (Hz)  
5.71G  
Span (Hz)  
60M  
RBW (Hz)  
1M  
VBW (Hz)  
3M  
Sweep Time (s)  
20m  
Detector Type  
RMS

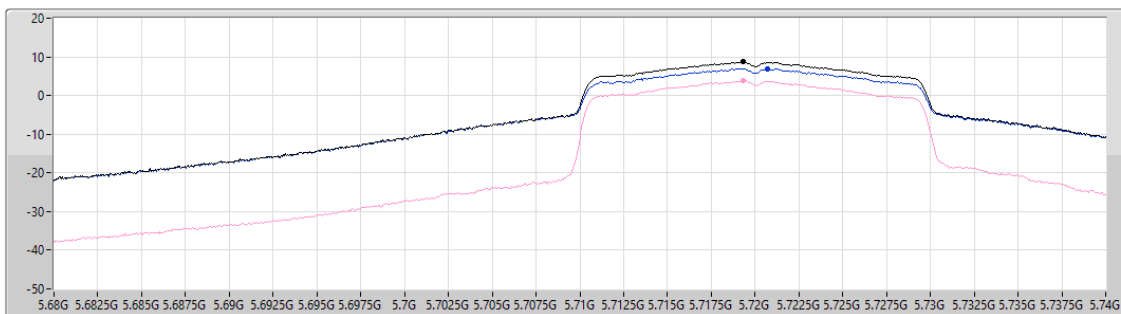

Sum  
Port 1  
Port 2


| Sum       | PD        | Port 1    | Port 2    |
|-----------|-----------|-----------|-----------|
| (dBm/RBW) | (dBm/RBW) | (dBm/RBW) | (dBm/RBW) |
| 8.68      | 8.68      | 6.99      | 3.90      |

5.725-5.85GHz\_802.11ax HEW20\_Nss1,(MCS0)\_2TX

PSD

5720MHz Straddle 5.725-5.85GHz

29/06/2024

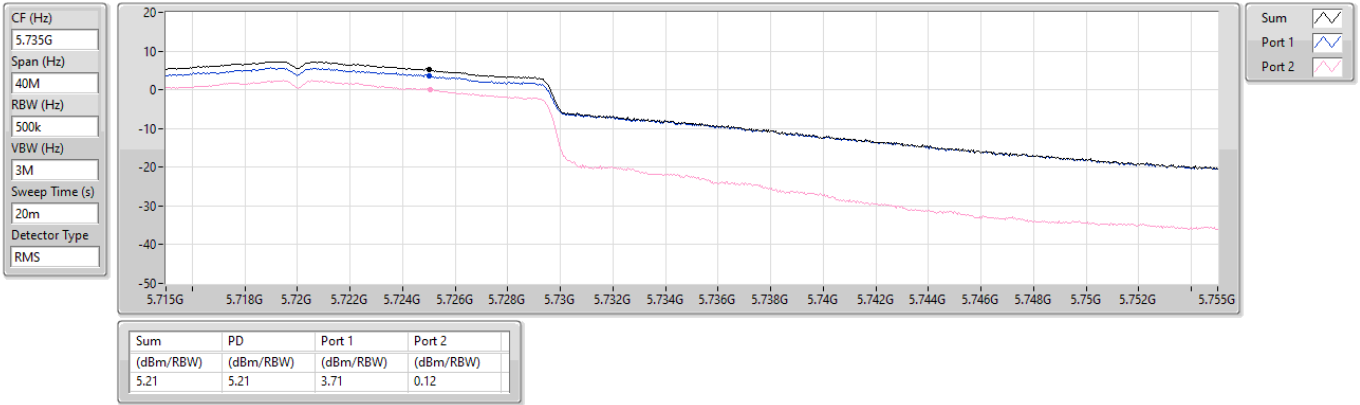


5.725-5.85GHz\_802.11ax HEW20\_Nss1,(MCS0)\_2TX

PSD

5745MHz

27/06/2024

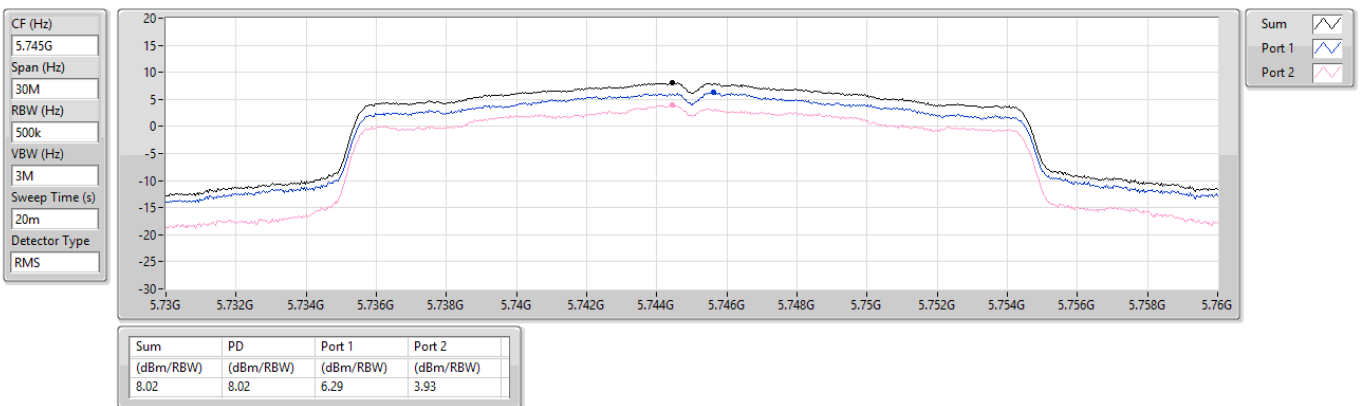


5.725-5.85GHz\_802.11ax HEW20\_Nss1,(MCS0)\_2TX

PSD

5785MHz

27/06/2024

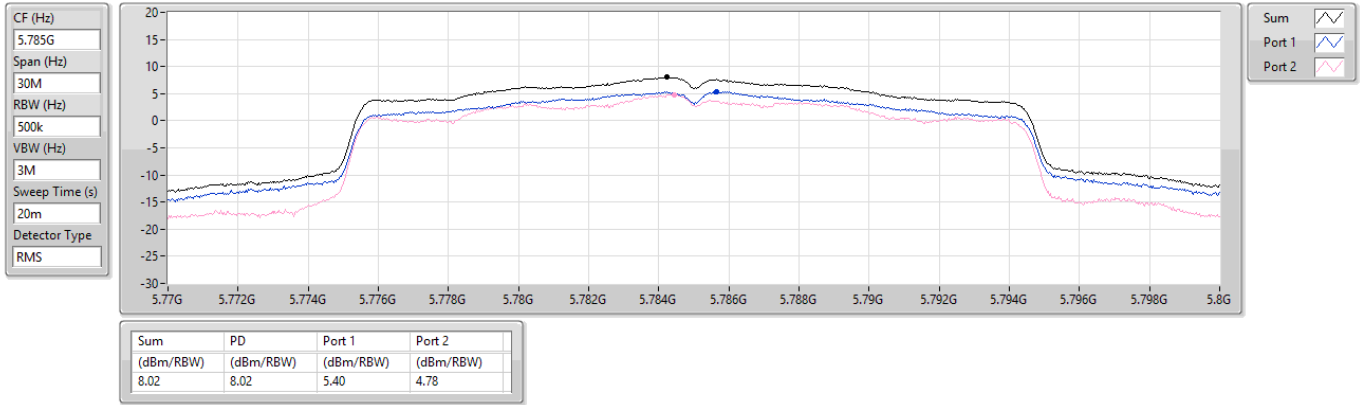


5.725-5.85GHz\_802.11ax HEW20\_Nss1,(MCS0)\_2TX

PSD

5825MHz

27/06/2024

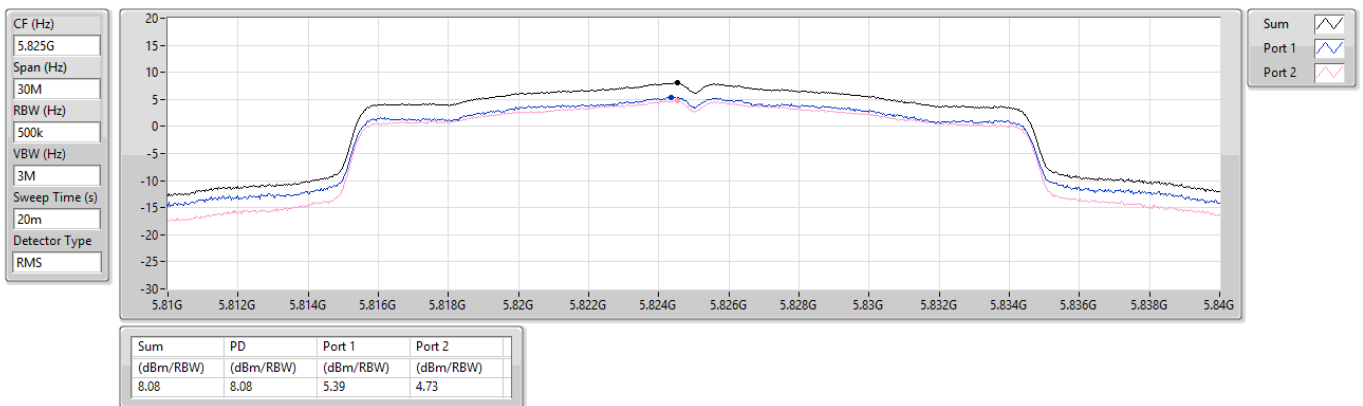


5.15-5.25GHz\_802.11ax\_HEW40\_Nss1,(MCS0)\_2TX

PSD

5190MHz

27/06/2024

CF (Hz)  
5.19G  
Span (Hz)  
60M  
RBW (Hz)  
1M  
VBW (Hz)  
3M  
Sweep Time (s)  
8.02  
Detector Type  
RMS

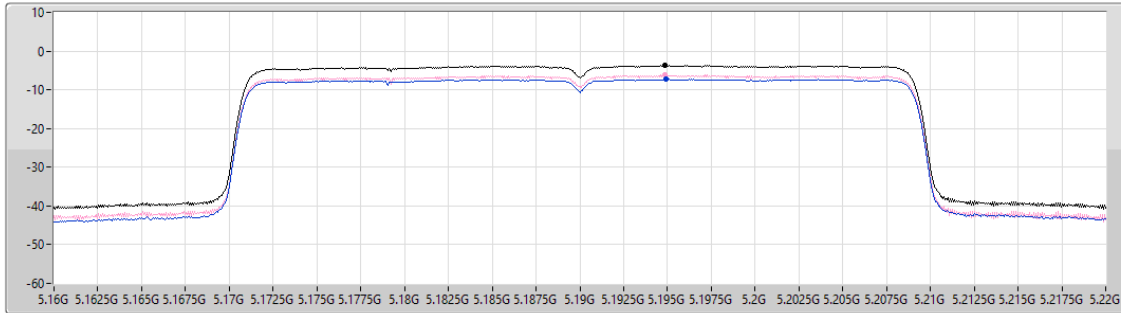

Sum  
Port 1  
Port 2

| Sum      | PD       | Port 1   | Port 2   |
|----------|----------|----------|----------|
| (dBm/Hz) | (dBm/Hz) | (dBm/Hz) | (dBm/Hz) |
| -3.74    | -3.74    | -7.34    | -6.20    |


5.15-5.25GHz\_802.11ax\_HEW40\_Nss1,(MCS0)\_2TX

PSD

5230MHz

27/06/2024

CF (Hz)  
5.23G  
Span (Hz)  
60M  
RBW (Hz)  
1M  
VBW (Hz)  
3M  
Sweep Time (s)  
8.02  
Detector Type  
RMS

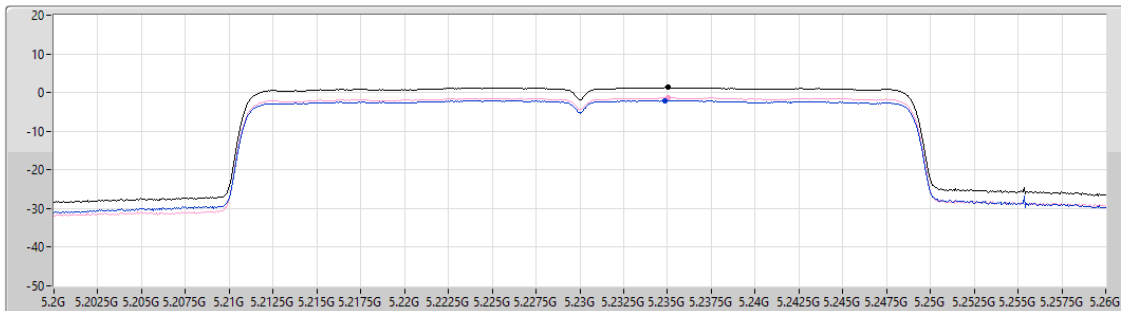

Sum  
Port 1  
Port 2

| Sum      | PD       | Port 1   | Port 2   |
|----------|----------|----------|----------|
| (dBm/Hz) | (dBm/Hz) | (dBm/Hz) | (dBm/Hz) |
| 1.30     | 1.30     | -2.12    | -1.32    |


5.25-5.35GHz\_802.11ax\_HEW40\_Nss1,(MCS0)\_2TX

PSD

5270MHz

27/06/2024

CF (Hz)  
5.27G  
Span (Hz)  
60M  
RBW (Hz)  
1M  
VBW (Hz)  
3M  
Sweep Time (s)  
8.02  
Detector Type  
RMS

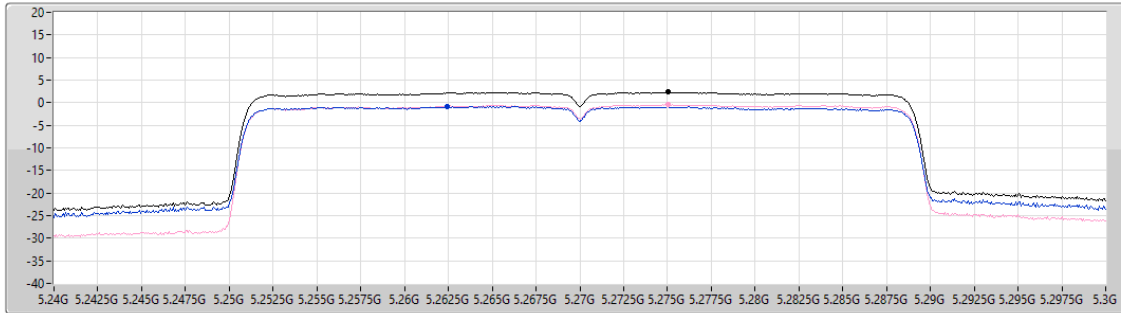

| Sum       | PD        | Port 1    | Port 2    |
|-----------|-----------|-----------|-----------|
| (dBm/RBW) | (dBm/RBW) | (dBm/RBW) | (dBm/RBW) |
| 2.35      | 2.35      | -0.82     | -0.41     |

Sum  
Port 1  
Port 2


5.25-5.35GHz\_802.11ax\_HEW40\_Nss1,(MCS0)\_2TX

PSD

5310MHz

27/06/2024

CF (Hz)  
5.31G  
Span (Hz)  
60M  
RBW (Hz)  
1M  
VBW (Hz)  
3M  
Sweep Time (s)  
8.02  
Detector Type  
RMS

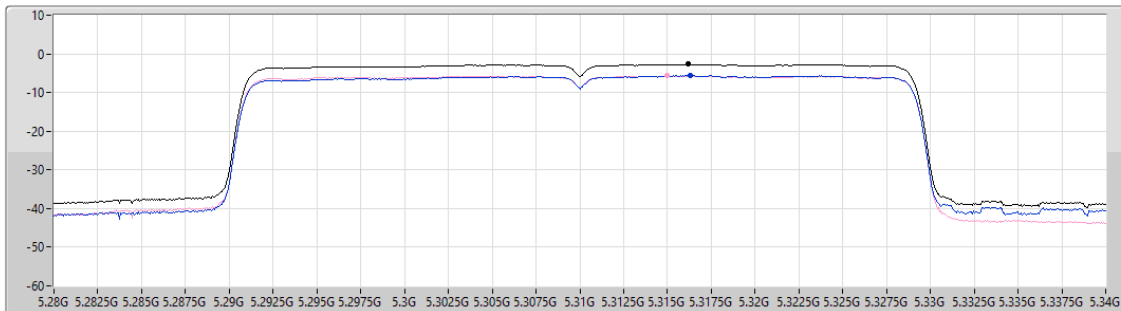

| Sum       | PD        | Port 1    | Port 2    |
|-----------|-----------|-----------|-----------|
| (dBm/RBW) | (dBm/RBW) | (dBm/RBW) | (dBm/RBW) |
| -2.70     | -2.70     | -5.61     | -5.64     |

Sum  
Port 1  
Port 2


5.47-5.725GHz\_802.11ax HEW40\_Nss1,(MCS0)\_2TX

PSD

5510MHz

27/06/2024

CF (Hz)  
5.51G  
Span (Hz)  
60M  
RBW (Hz)  
1M  
VBW (Hz)  
3M  
Sweep Time (s)  
8.02  
Detector Type  
RMS

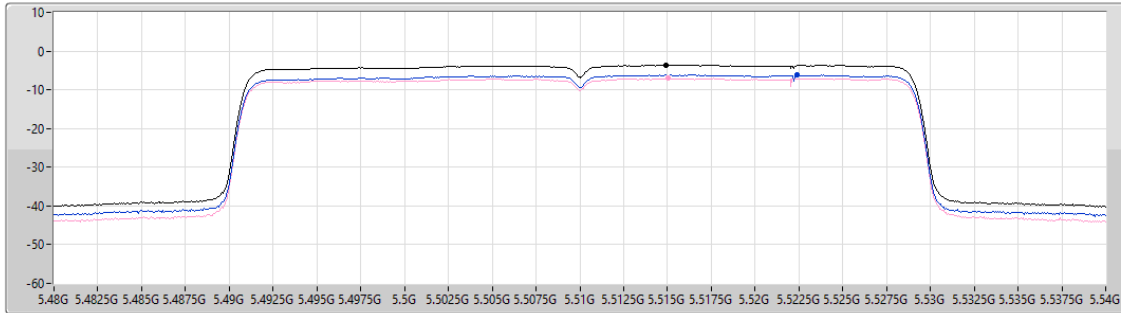

| Sum       | PD        | Port 1    | Port 2    |
|-----------|-----------|-----------|-----------|
| (dBm/RBW) | (dBm/RBW) | (dBm/RBW) | (dBm/RBW) |
| -3.62     | -3.62     | -6.15     | -7.03     |

Sum  
Port 1  
Port 2


5.47-5.725GHz\_802.11ax HEW40\_Nss1,(MCS0)\_2TX

PSD

5550MHz

27/06/2024

CF (Hz)  
5.55G  
Span (Hz)  
60M  
RBW (Hz)  
1M  
VBW (Hz)  
3M  
Sweep Time (s)  
8.02  
Detector Type  
RMS

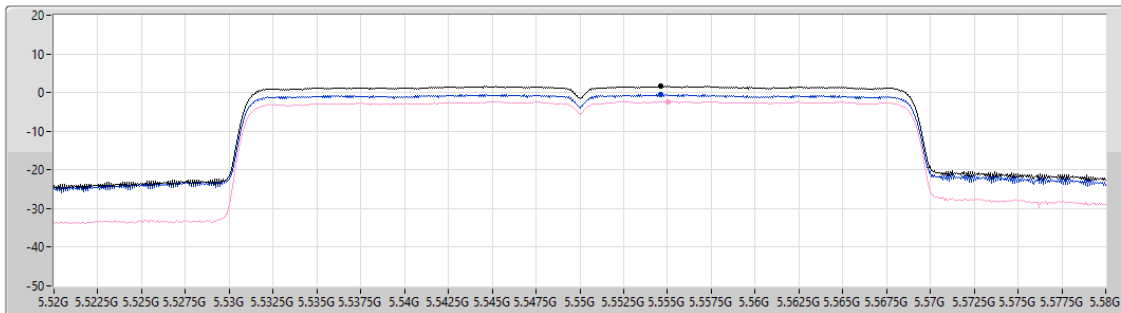

| Sum       | PD        | Port 1    | Port 2    |
|-----------|-----------|-----------|-----------|
| (dBm/RBW) | (dBm/RBW) | (dBm/RBW) | (dBm/RBW) |
| 1.65      | 1.65      | -0.53     | -2.29     |

Sum  
Port 1  
Port 2


5.47-5.725GHz\_802.11ax HEW40\_Nss1,(MCS0)\_2TX

PSD

5670MHz

27/06/2024

CF (Hz)  
5.67G  
Span (Hz)  
60M  
RBW (Hz)  
1M  
VBW (Hz)  
3M  
Sweep Time (s)  
8.02  
Detector Type  
RMS

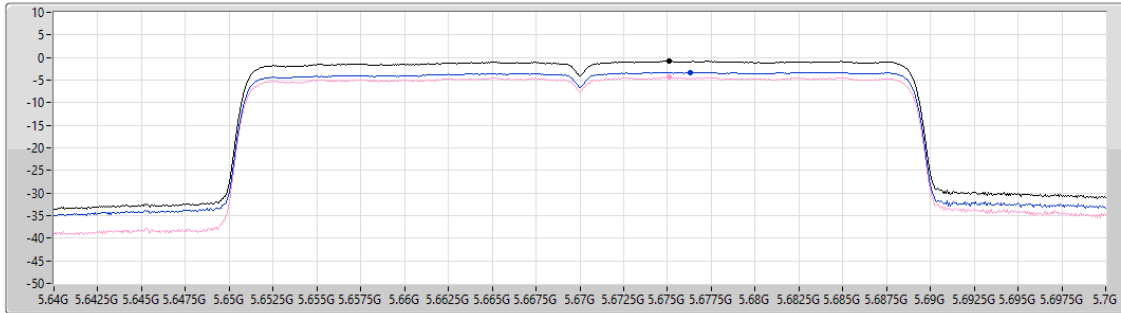

| Sum       | PD        | Port 1    | Port 2    |
|-----------|-----------|-----------|-----------|
| (dBm/RBW) | (dBm/RBW) | (dBm/RBW) | (dBm/RBW) |
| -0.80     | -0.80     | -3.27     | -4.33     |

Sum  
Port 1  
Port 2


5.47-5.725GHz\_802.11ax HEW40\_Nss1,(MCS0)\_2TX

PSD

5710MHz Straddle 5.47-5.725GHz

29/06/2024

CF (Hz)  
5.69G  
Span (Hz)  
140M  
RBW (Hz)  
1M  
VBW (Hz)  
3M  
Sweep Time (s)  
20m  
Detector Type  
RMS

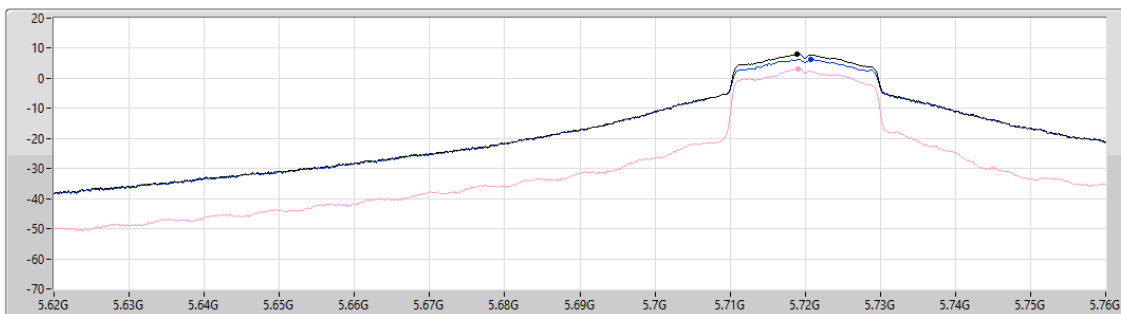

| Sum       | PD        | Port 1    | Port 2    |
|-----------|-----------|-----------|-----------|
| (dBm/RBW) | (dBm/RBW) | (dBm/RBW) | (dBm/RBW) |
| 8.01      | 8.01      | 6.41      | 3.21      |


Sum  
Port 1  
Port 2

5.725-5.85GHz\_802.11ax HEW40\_Nss1,(MCS0)\_2TX

PSD

5710MHz Straddle 5.725-5.85GHz

29/06/2024

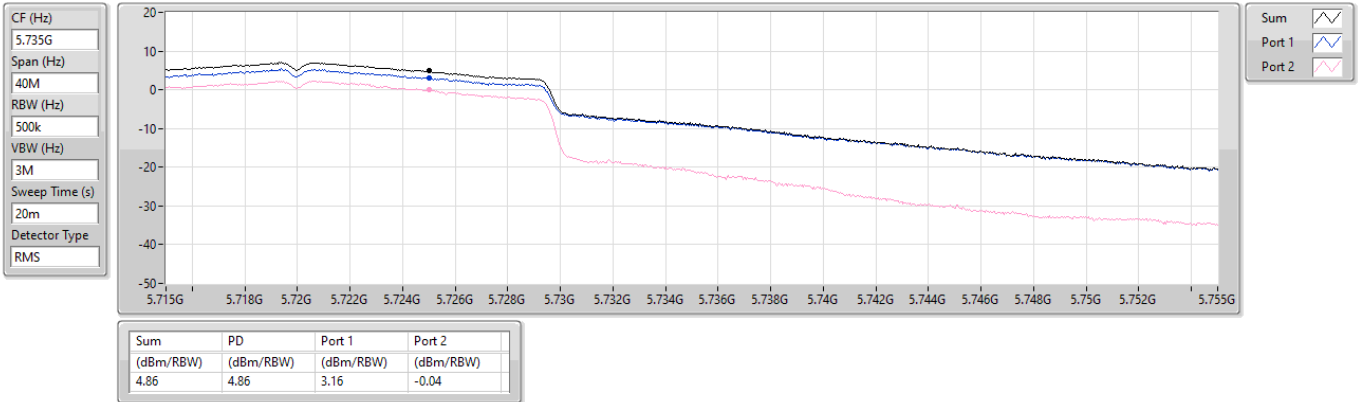


5.725-5.85GHz\_802.11ax HEW40\_Nss1,(MCS0)\_2TX

PSD

5755MHz

27/06/2024

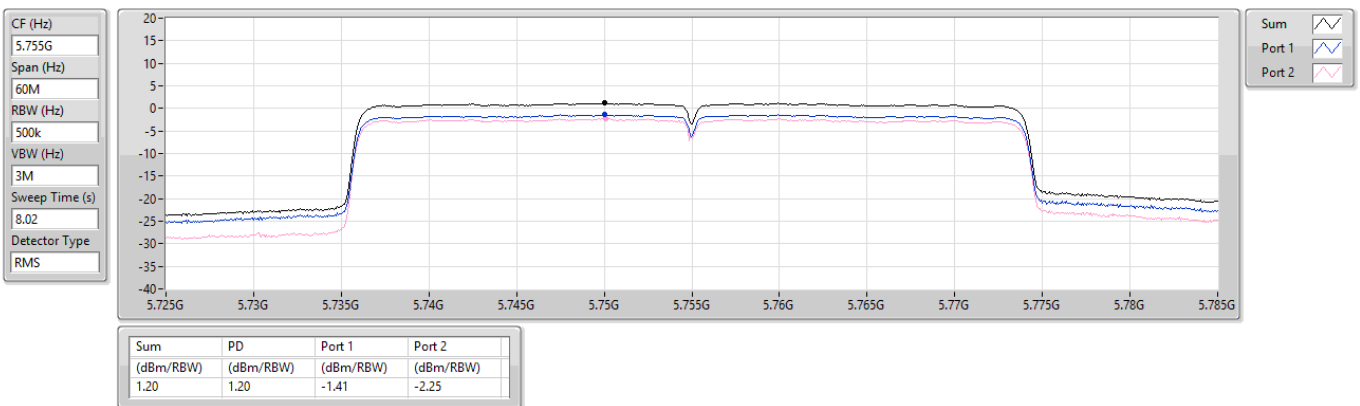


5.725-5.85GHz\_802.11ax HEW40\_Nss1,(MCS0)\_2TX

PSD

5795MHz

27/06/2024

CF (Hz)  
5.795G  
Span (Hz)  
60M  
RBW (Hz)  
500k  
VBW (Hz)  
3M  
Sweep Time (s)  
8.02  
Detector Type  
RMS

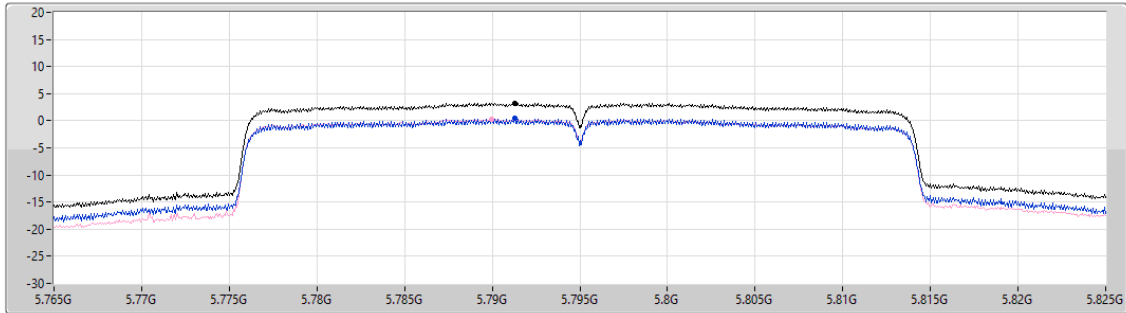

| Sum       | PD        | Port 1    | Port 2    |
|-----------|-----------|-----------|-----------|
| (dBm/RBW) | (dBm/RBW) | (dBm/RBW) | (dBm/RBW) |
| 3.24      | 3.24      | 0.45      | 0.25      |

Sum  
Port 1  
Port 2


5.15-5.25GHz\_802.11ax HEW80\_Nss1,(MCS0)\_2TX

PSD

5210MHz

27/06/2024

CF (Hz)  
5.21G  
Span (Hz)  
120M  
RBW (Hz)  
1M  
VBW (Hz)  
3M  
Sweep Time (s)  
6.418  
Detector Type  
RMS

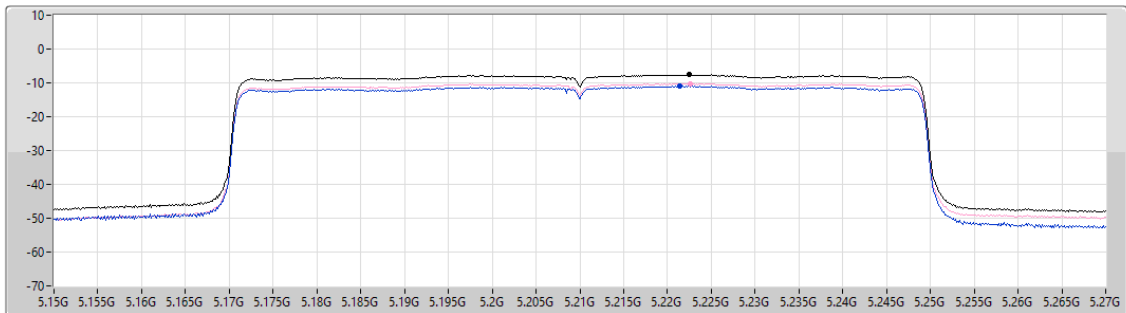

| Sum       | PD        | Port 1    | Port 2    |
|-----------|-----------|-----------|-----------|
| (dBm/RBW) | (dBm/RBW) | (dBm/RBW) | (dBm/RBW) |
| -7.59     | -7.59     | -10.95    | -10.26    |

Sum  
Port 1  
Port 2


5.25-5.35GHz\_802.11ax HEW80\_Nss1,(MCS0)\_2TX

PSD

5290MHz

27/06/2024

CF (Hz)  
5.29G  
Span (Hz)  
120M  
RBW (Hz)  
1M  
VBW (Hz)  
3M  
Sweep Time (s)  
6.418  
Detector Type  
RMS

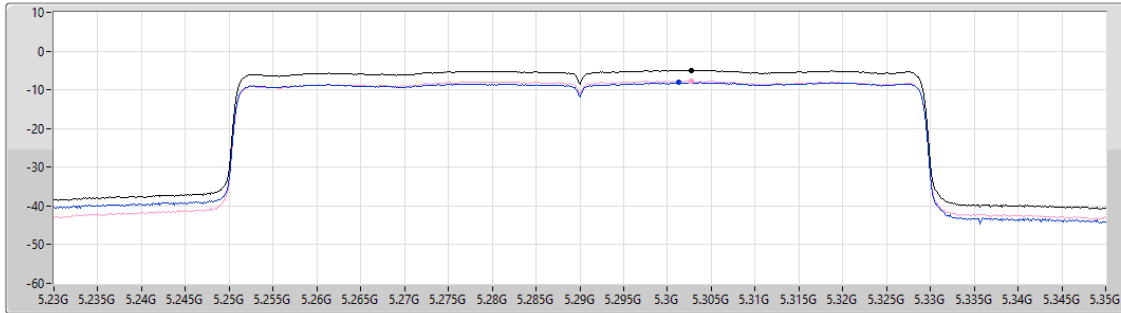

| Sum      | PD       | Port 1   | Port 2   |
|----------|----------|----------|----------|
| (dBm/Hz) | (dBm/Hz) | (dBm/Hz) | (dBm/Hz) |
| -4.94    | -4.94    | -8.10    | -7.75    |

Sum  
Port 1  
Port 2


5.47-5.725GHz\_802.11ax HEW80\_Nss1,(MCS0)\_2TX

PSD

5530MHz

27/06/2024

CF (Hz)  
5.53G  
Span (Hz)  
120M  
RBW (Hz)  
1M  
VBW (Hz)  
3M  
Sweep Time (s)  
6.418  
Detector Type  
RMS

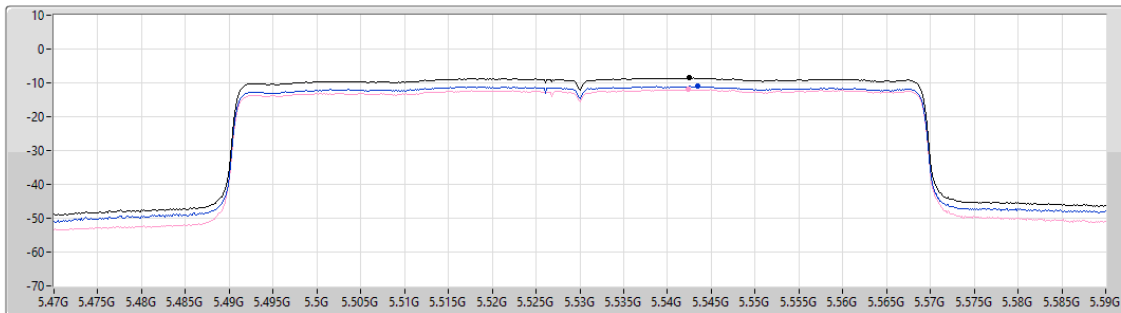

| Sum      | PD       | Port 1   | Port 2   |
|----------|----------|----------|----------|
| (dBm/Hz) | (dBm/Hz) | (dBm/Hz) | (dBm/Hz) |
| -8.52    | -8.52    | -11.07   | -11.98   |

Sum  
Port 1  
Port 2


5.47-5.725GHz\_802.11ax HEW80\_Nss1,(MCS0)\_2TX

PSD

5610MHz

27/06/2024

CF (Hz)  
5.61G  
Span (Hz)  
120M  
RBW (Hz)  
1M  
VBW (Hz)  
3M  
Sweep Time (s)  
6.418  
Detector Type  
RMS

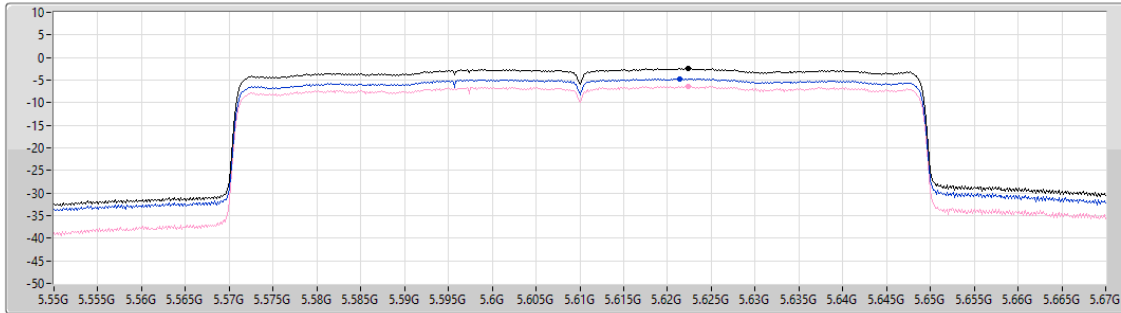

| Sum      | PD       | Port 1   | Port 2   |
|----------|----------|----------|----------|
| (dBm/Hz) | (dBm/Hz) | (dBm/Hz) | (dBm/Hz) |
| -2.41    | -2.41    | -4.66    | -6.31    |

Sum  
Port 1  
Port 2


5.47-5.725GHz\_802.11ax HEW80\_Nss1,(MCS0)\_2TX

PSD

5690MHz Straddle 5.47-5.725GHz

27/06/2024

CF (Hz)  
5.65G  
Span (Hz)  
300M  
RBW (Hz)  
1M  
VBW (Hz)  
3M  
Sweep Time (s)  
6.418  
Detector Type  
RMS

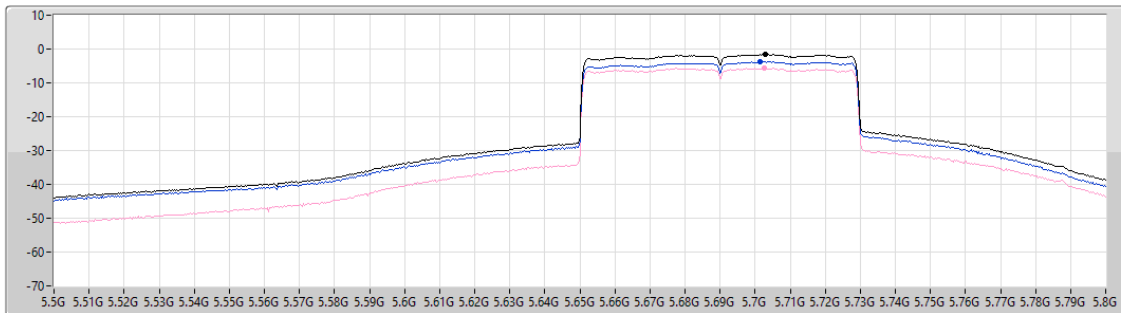

| Sum      | PD       | Port 1   | Port 2   |
|----------|----------|----------|----------|
| (dBm/Hz) | (dBm/Hz) | (dBm/Hz) | (dBm/Hz) |
| -1.59    | -1.59    | -3.72    | -5.66    |


Sum  
Port 1  
Port 2

5.725-5.85GHz\_802.11ax HEW80\_Nss1,(MCS0)\_2TX

PSD

5690MHz Straddle 5.725-5.85GHz

27/06/2024

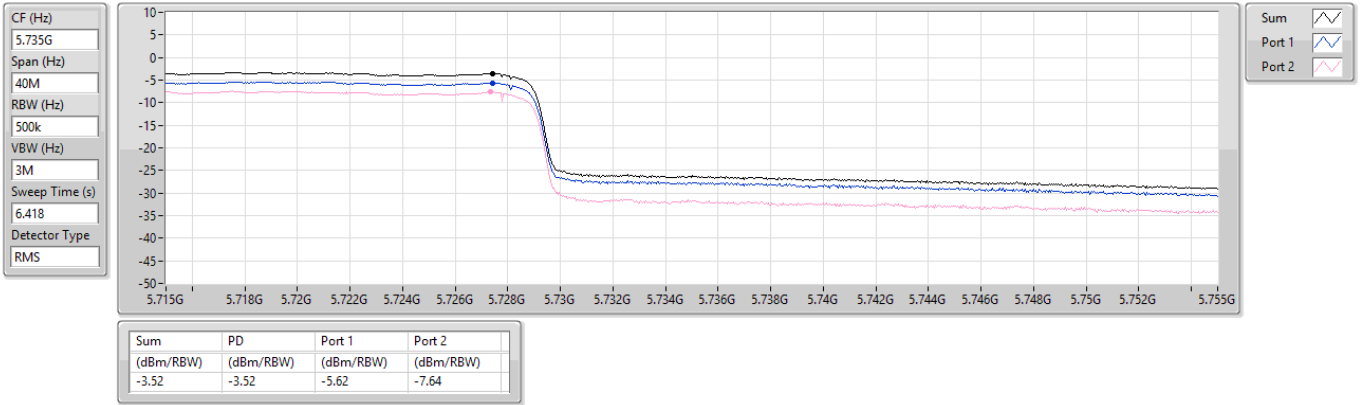


5.725-5.85GHz\_802.11ax HEW80\_Nss1,(MCS0)\_2TX

PSD

5775MHz

27/06/2024

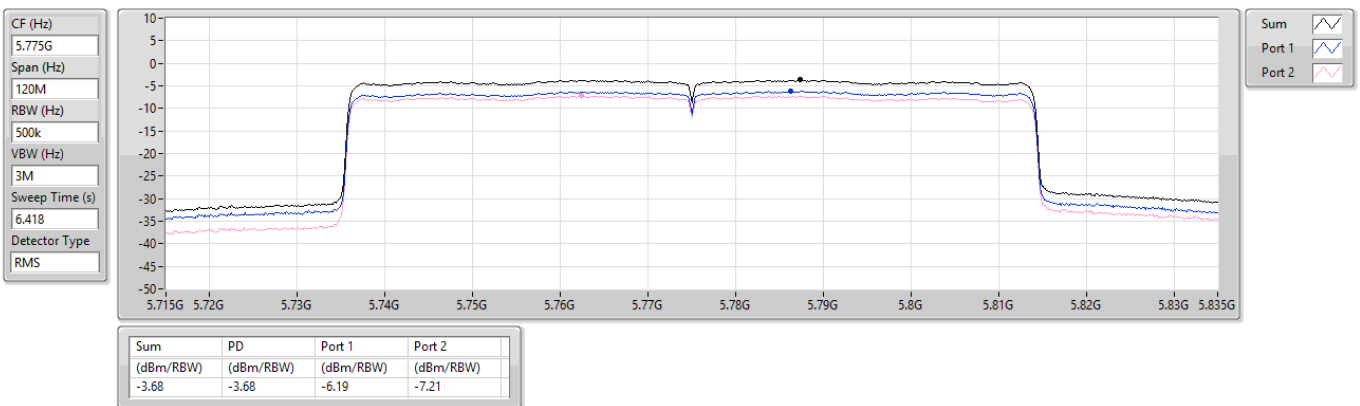




## ***Radiated Emissions below 1GHz***

## ***Appendix E.1***

### **Summary**


| Mode   | Result | Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Condition  |
|--------|--------|------|--------------|-------------------|-------------------|----------------|------------|
| Mode 3 | Pass   | QP   | 299.66M      | 44.13             | 46.00             | -1.87          | Horizontal |

### Mode 3

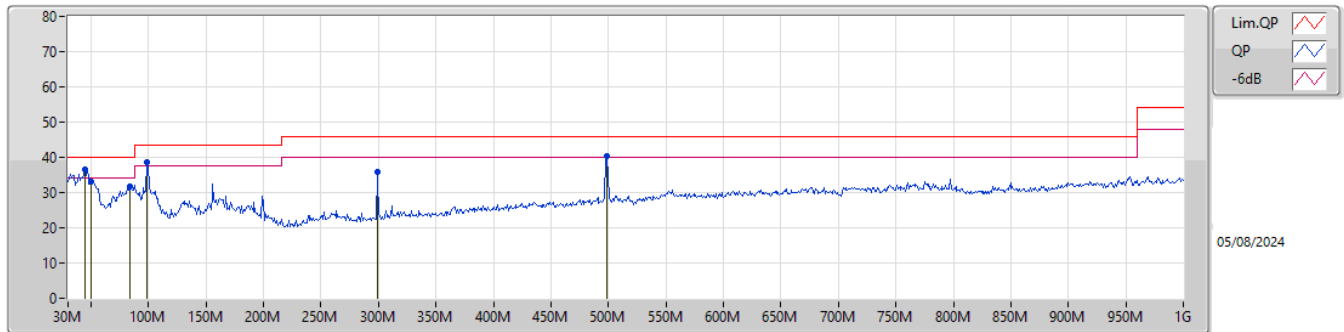

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Factor<br>(dB/m) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | Raw<br>(dBuV) | AF<br>(dB/m) | CL<br>(dB) | PA<br>(dB) |  |  |
|------|--------------|-------------------|-------------------|----------------|------------------|-------------|-----------|----------------|---------------|---------|---------------|--------------|------------|------------|--|--|
| PK   | 44.55M       | 36.63             | 40.00             | -3.37          | -14.56           | 3           | Vertical  | 98             | 1.00          | "Worst" | 51.19         | 16.50        | 1.30       | 32.36      |  |  |
| PK   | 50.37M       | 33.05             | 40.00             | -6.95          | -17.04           | 3           | Vertical  | 81             | 1.00          | -       | 50.09         | 13.97        | 1.32       | 32.33      |  |  |
| PK   | 84.32M       | 31.89             | 40.00             | -8.11          | -17.24           | 3           | Vertical  | 73             | 1.00          | -       | 49.13         | 13.55        | 1.59       | 32.38      |  |  |
| PK   | 98.87M       | 38.53             | 43.50             | -4.97          | -14.24           | 3           | Vertical  | 181            | 1.00          | -       | 52.77         | 16.45        | 1.67       | 32.36      |  |  |
| PK   | 298.69M      | 35.71             | 46.00             | -10.29         | -10.36           | 3           | Vertical  | 165            | 1.50          | -       | 46.07         | 19.01        | 2.59       | 31.96      |  |  |
| PK   | 498.51M      | 40.29             | 46.00             | -5.71          | -5.54            | 3           | Vertical  | 198            | 1.25          | -       | 45.83         | 23.24        | 3.25       | 32.03      |  |  |

### Mode 3

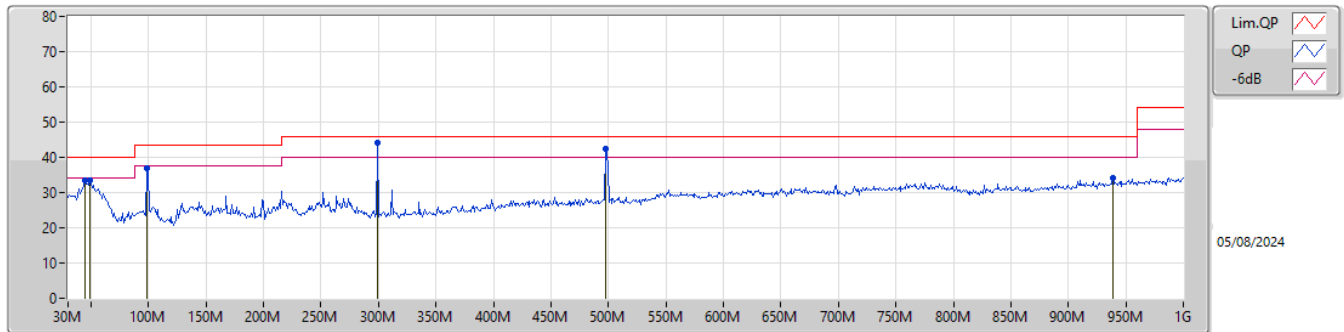

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Factor<br>(dB/m) | Dist<br>(m) | Condition  | Azimuth<br>(°) | Height<br>(m) | Comment | Raw<br>(dBuV) | AF<br>(dB/m) | CL<br>(dB) | PA<br>(dB) |  |  |
|------|--------------|-------------------|-------------------|----------------|------------------|-------------|------------|----------------|---------------|---------|---------------|--------------|------------|------------|--|--|
| PK   | 44.55M       | 33.39             | 40.00             | -6.61          | -14.56           | 3           | Horizontal | 3              | 1.25          | -       | 47.95         | 16.50        | 1.30       | 32.36      |  |  |
| PK   | 49.4M        | 33.51             | 40.00             | -6.49          | -16.67           | 3           | Horizontal | 340            | 1.50          | -       | 50.18         | 14.34        | 1.32       | 32.33      |  |  |
| PK   | 98.87M       | 37.00             | 43.50             | -6.50          | -14.24           | 3           | Horizontal | 9              | 3.00          | -       | 51.24         | 16.45        | 1.67       | 32.36      |  |  |
| QP   | 299.66M      | 44.13             | 46.00             | -1.87          | -10.34           | 3           | Horizontal | 212            | 1.25          | "Worst" | 54.47         | 19.02        | 2.59       | 31.95      |  |  |
| PK   | 497.54M      | 42.41             | 46.00             | -3.59          | -5.57            | 3           | Horizontal | 318            | 1.00          | -       | 47.98         | 23.22        | 3.24       | 32.03      |  |  |
| PK   | 938.89M      | 34.17             | 46.00             | -11.83         | 0.10             | 3           | Horizontal | 358            | 3.00          | -       | 34.07         | 26.42        | 4.37       | 30.69      |  |  |




**Summary**

| Mode                           | Result | Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comments |
|--------------------------------|--------|------|--------------|-------------------|-------------------|----------------|-------------|-----------|----------------|---------------|----------|
| 5.25-5.35GHz                   | -      | -    | -            | -                 | -                 | -              | -           | -         | -              | -             | -        |
| 802.11ax HEW20_Nss1,(MCS0)_2TX | Pass   | AV   | 5.3502G      | 53.98             | 54.00             | -0.02          | 3           | Vertical  | 344            | 2.08          | -        |

## 5.15-5.25GHz\_802.11a\_Nss1,(6Mbps)\_2TX

### 5180MHz\_TX

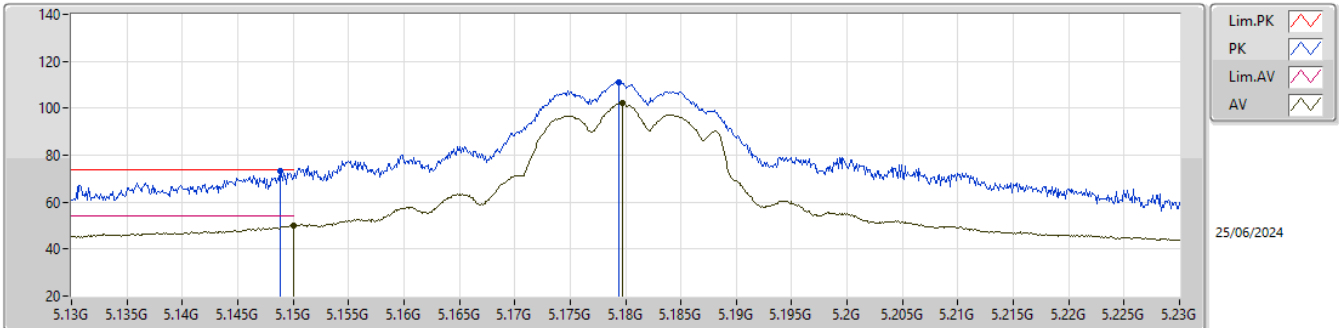


EUT\_Z\_2TX  
Setting 45  
04-D-G-4-10

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|-----------|----------------|---------------|---------|------------|------------|------------|--|--|--|
| PK   | 5.1488G      | 73.16             | 74.00             | -0.84          | 78.38         | 3           | Vertical  | 58             | 1.00          | -       | 32.60      | 5.90       | 43.72      |  |  |  |
| AV   | 5.15G        | 50.17             | 54.00             | -3.83          | 55.39         | 3           | Vertical  | 58             | 1.00          | -       | 32.60      | 5.90       | 43.72      |  |  |  |
| PK   | 5.1794G      | 111.02            | Inf               | -Inf           | 116.13        | 3           | Vertical  | 58             | 1.00          | -       | 32.66      | 5.91       | 43.68      |  |  |  |
| AV   | 5.1797G      | 102.43            | Inf               | -Inf           | 107.54        | 3           | Vertical  | 58             | 1.00          | -       | 32.66      | 5.91       | 43.68      |  |  |  |

## 5.15-5.25GHz\_802.11a\_Nss1,(6Mbps)\_2TX

## 5180MHz\_TX

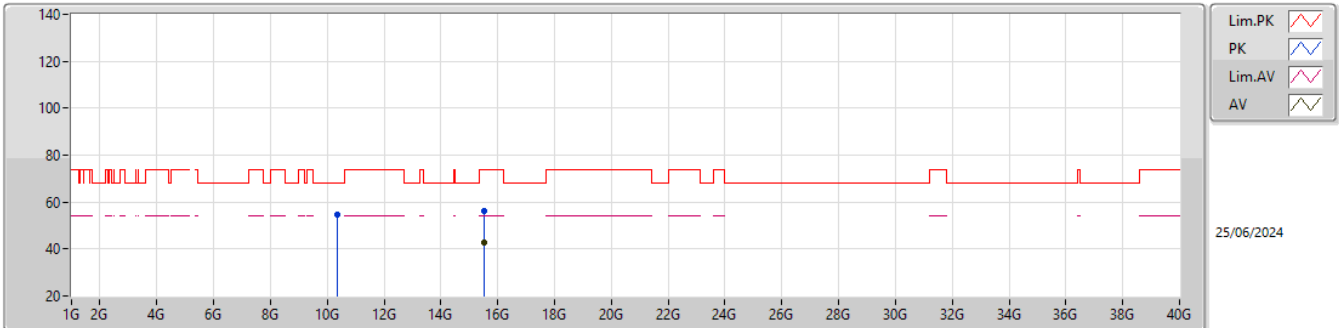


EUT\_Y\_2TX  
Setting 45  
04-D-Y-1

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|-----------|----------------|---------------|---------|------------|------------|------------|--|--|--|
| PK   | 10.34962G    | 54.70             | 68.20             | -13.50         | 50.02         | 3           | Vertical  | 125            | 1.80          | -       | 38.60      | 8.89       | 42.81      |  |  |  |
| PK   | 15.54288G    | 56.01             | 74.00             | -17.99         | 47.89         | 3           | Vertical  | 337            | 1.80          | -       | 38.30      | 11.23      | 41.41      |  |  |  |
| AV   | 15.5394G     | 42.91             | 54.00             | -11.09         | 34.79         | 3           | Vertical  | 337            | 1.80          | -       | 38.30      | 11.23      | 41.41      |  |  |  |

## 5.15-5.25GHz\_802.11a\_Nss1,(6Mbps)\_2TX

## 5180MHz\_TX

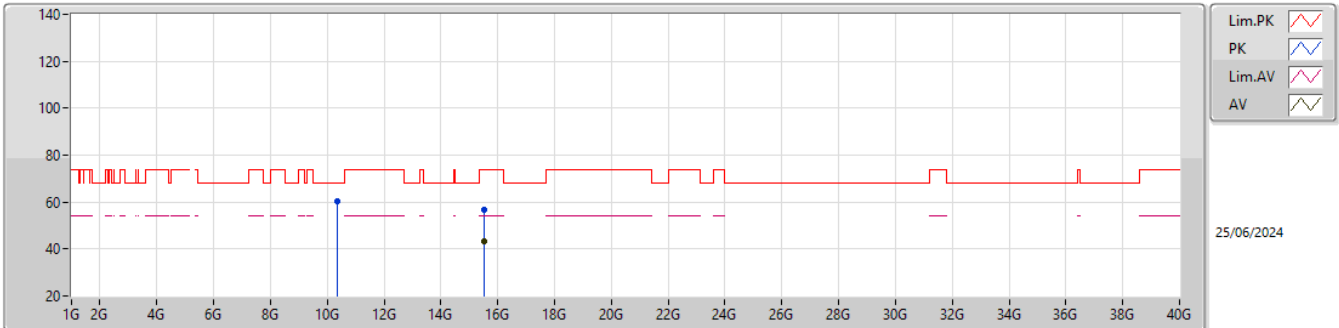


EUT\_Y\_2TX  
Setting 45  
04-D-Y-1

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition  | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|------------|----------------|---------------|---------|------------|------------|------------|--|--|--|
| PK   | 10.35694G    | 60.56             | 68.20             | -7.64          | 55.89         | 3           | Horizontal | 129            | 1.95          | -       | 38.60      | 8.89       | 42.82      |  |  |  |
| PK   | 15.5343G     | 56.54             | 74.00             | -17.46         | 48.41         | 3           | Horizontal | 180            | 1.61          | -       | 38.30      | 11.23      | 41.40      |  |  |  |
| AV   | 15.54195G    | 43.09             | 54.00             | -10.91         | 34.97         | 3           | Horizontal | 180            | 1.61          | -       | 38.30      | 11.23      | 41.41      |  |  |  |

## 5.15-5.25GHz\_802.11a\_Nss1,(6Mbps)\_2TX

## 5200MHz\_TX

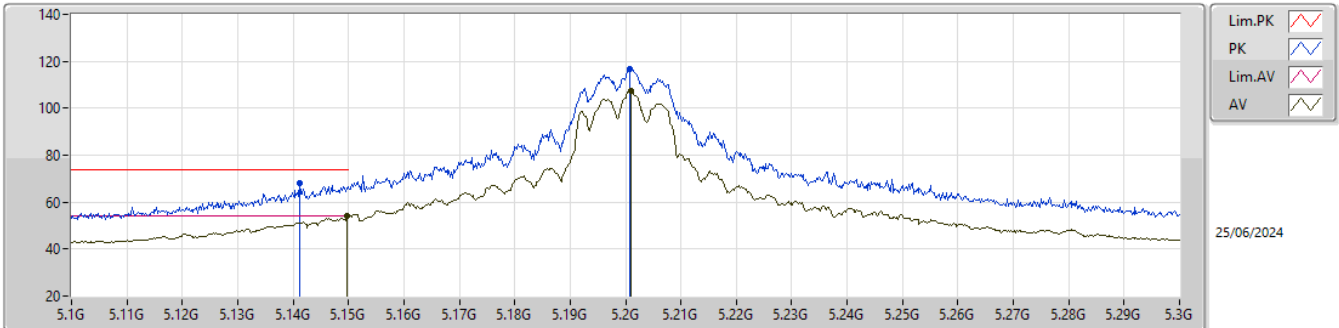


EUT\_Z\_2TX  
Setting 65  
04-D-G-4-10

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|-----------|----------------|---------------|---------|------------|------------|------------|--|--|--|
| PK   | 5.1412G      | 67.88             | 74.00             | -6.12          | 73.14         | 3           | Vertical  | 40             | 1.00          | -       | 32.58      | 5.89       | 43.73      |  |  |  |
| AV   | 5.1498G      | 53.92             | 54.00             | -0.08          | 59.14         | 3           | Vertical  | 40             | 1.00          | -       | 32.60      | 5.90       | 43.72      |  |  |  |
| PK   | 5.2008G      | 116.88            | Inf               | -Inf           | 121.92        | 3           | Vertical  | 40             | 1.00          | -       | 32.70      | 5.92       | 43.66      |  |  |  |
| AV   | 5.201G       | 107.20            | Inf               | -Inf           | 112.24        | 3           | Vertical  | 40             | 1.00          | -       | 32.70      | 5.92       | 43.66      |  |  |  |

## 5.15-5.25GHz\_802.11a\_Nss1,(6Mbps)\_2TX

### 5200MHz\_TX

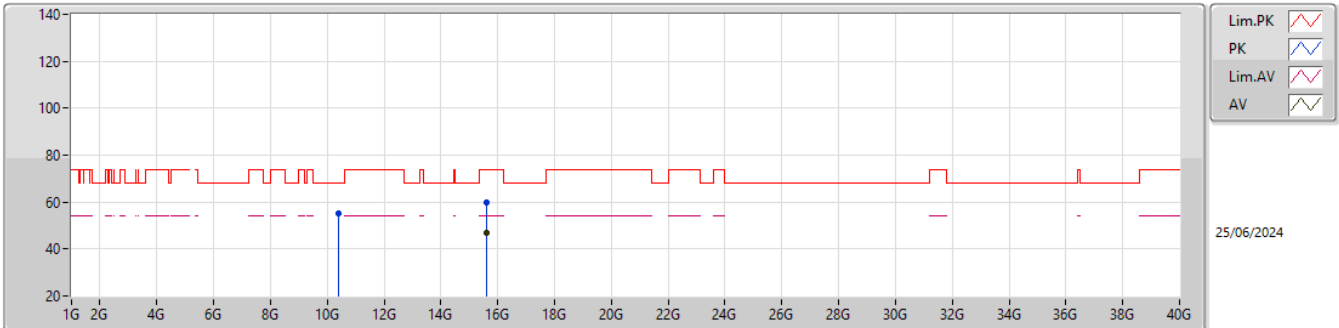


EUT\_Y\_2TX  
Setting 65  
04-D-Y-1

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|-----------|----------------|---------------|---------|------------|------------|------------|--|--|--|
| PK   | 10.40342G    | 55.04             | 68.20             | -13.16         | 50.36         | 3           | Vertical  | 180            | 2.65          | -       | 38.60      | 8.92       | 42.84      |  |  |  |
| PK   | 15.59802G    | 59.93             | 74.00             | -14.07         | 51.79         | 3           | Vertical  | 146            | 1.80          | -       | 38.40      | 11.26      | 41.52      |  |  |  |
| AV   | 15.60291G    | 46.84             | 54.00             | -7.16          | 38.73         | 3           | Vertical  | 146            | 1.80          | -       | 38.38      | 11.26      | 41.53      |  |  |  |

## 5.15-5.25GHz\_802.11a\_Nss1,(6Mbps)\_2TX

## 5200MHz\_TX

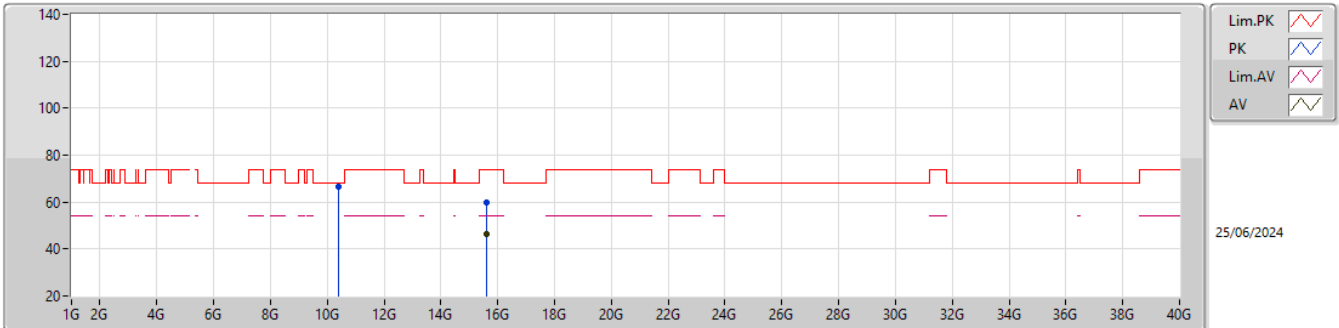


EUT\_Y\_2TX  
Setting 65  
04-D-Y-1

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition  | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|------------|----------------|---------------|---------|------------|------------|------------|--|--|--|
| PK   | 10.40261G    | 66.41             | 68.20             | -1.79          | 61.73         | 3           | Horizontal | 132            | 1.97          | -       | 38.60      | 8.92       | 42.84      |  |  |  |
| PK   | 15.59742G    | 60.03             | 74.00             | -13.97         | 51.90         | 3           | Horizontal | 130            | 1.65          | -       | 38.39      | 11.26      | 41.52      |  |  |  |
| AV   | 15.59688G    | 46.37             | 54.00             | -7.63          | 38.24         | 3           | Horizontal | 130            | 1.65          | -       | 38.39      | 11.26      | 41.52      |  |  |  |

## 5.15-5.25GHz\_802.11a\_Nss1,(6Mbps)\_2TX

### 5240MHz\_TX

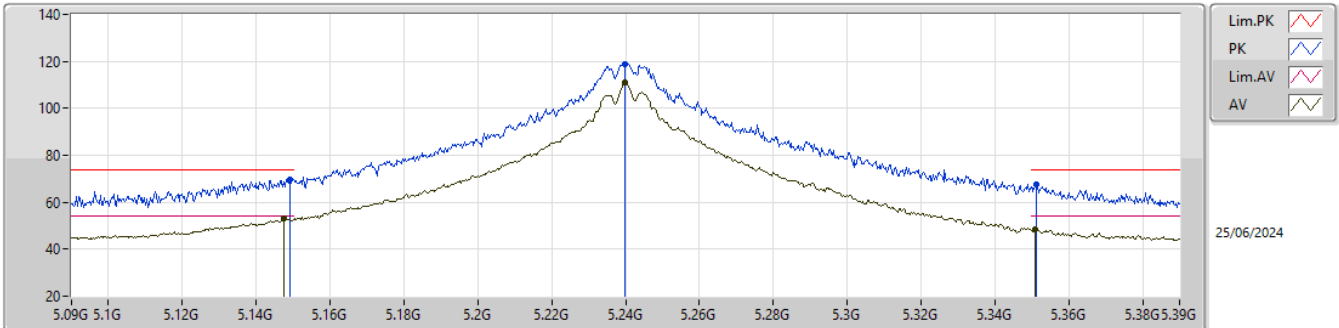


EUT\_Z\_2TX  
Setting 74  
04-D-K-5-10

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|-----------|----------------|---------------|---------|------------|------------|------------|--|--|--|
| PK   | 5.1491G      | 69.76             | 74.00             | -4.24          | 74.98         | 3           | Vertical  | 44             | 1.00          | -       | 32.60      | 5.90       | 43.72      |  |  |  |
| AV   | 5.1476G      | 52.86             | 54.00             | -1.14          | 58.08         | 3           | Vertical  | 44             | 1.00          | -       | 32.60      | 5.90       | 43.72      |  |  |  |
| PK   | 5.2397G      | 118.84            | Inf               | -Inf           | 123.79        | 3           | Vertical  | 44             | 1.00          | -       | 32.70      | 5.96       | 43.61      |  |  |  |
| AV   | 5.2397G      | 111.00            | Inf               | -Inf           | 115.95        | 3           | Vertical  | 44             | 1.00          | -       | 32.70      | 5.96       | 43.61      |  |  |  |
| PK   | 5.3513G      | 67.75             | 74.00             | -6.25          | 72.25         | 3           | Vertical  | 44             | 1.00          | -       | 32.91      | 6.07       | 43.48      |  |  |  |
| AV   | 5.351G       | 48.33             | 54.00             | -5.67          | 52.84         | 3           | Vertical  | 44             | 1.00          | -       | 32.90      | 6.07       | 43.48      |  |  |  |

## 5.15-5.25GHz\_802.11a\_Nss1,(6Mbps)\_2TX

### 5240MHz\_TX

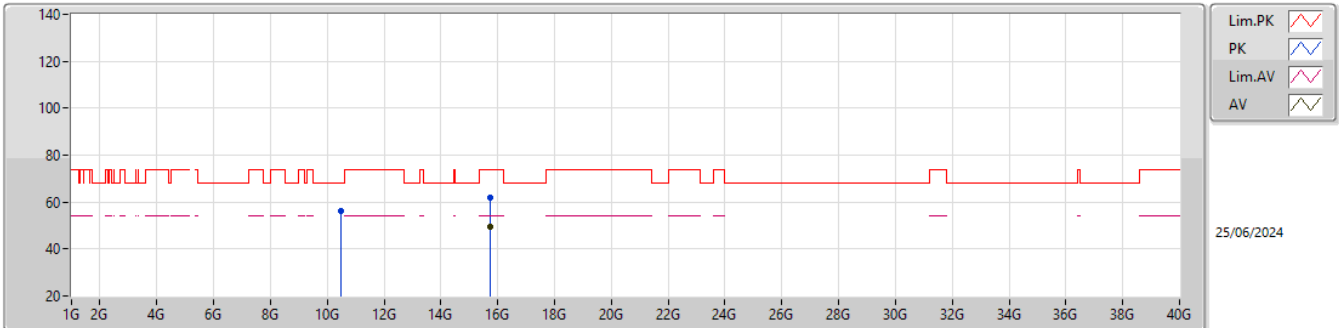


EUT\_Y\_2TX  
Setting 74  
04-D-K-5

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|-----------|----------------|---------------|---------|------------|------------|------------|--|--|--|
| PK   | 10.47883G    | 55.95             | 68.20             | -12.25         | 51.21         | 3           | Vertical  | 29             | 2.51          | -       | 38.66      | 8.95       | 42.87      |  |  |  |
| PK   | 15.71853G    | 62.06             | 74.00             | -11.94         | 54.59         | 3           | Vertical  | 181            | 1.90          | -       | 37.91      | 11.32      | 41.76      |  |  |  |
| AV   | 15.71871G    | 49.57             | 54.00             | -4.43          | 42.10         | 3           | Vertical  | 181            | 1.90          | -       | 37.91      | 11.32      | 41.76      |  |  |  |

## 5.15-5.25GHz\_802.11a\_Nss1,(6Mbps)\_2TX

### 5240MHz\_TX

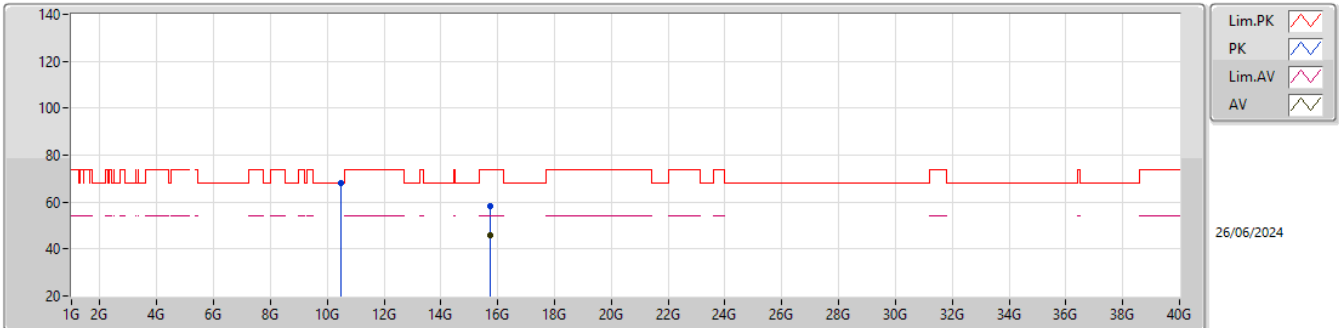


EUT\_Y\_2TX  
Setting 74  
04-D-K-5

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition  | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|------------|----------------|---------------|---------|------------|------------|------------|--|--|--|
| PK   | 10.48282G    | 68.17             | 68.20             | -0.03          | 63.41         | 3           | Horizontal | 134            | 1.94          | -       | 38.67      | 8.96       | 42.87      |  |  |  |
| PK   | 15.71853G    | 58.25             | 74.00             | -15.75         | 50.78         | 3           | Horizontal | 126            | 1.80          | -       | 37.91      | 11.32      | 41.76      |  |  |  |
| AV   | 15.71859G    | 45.64             | 54.00             | -8.36          | 38.17         | 3           | Horizontal | 126            | 1.80          | -       | 37.91      | 11.32      | 41.76      |  |  |  |

## 5.25-5.35GHz\_802.11a\_Nss1,(6Mbps)\_2TX

## 5260MHz\_TX

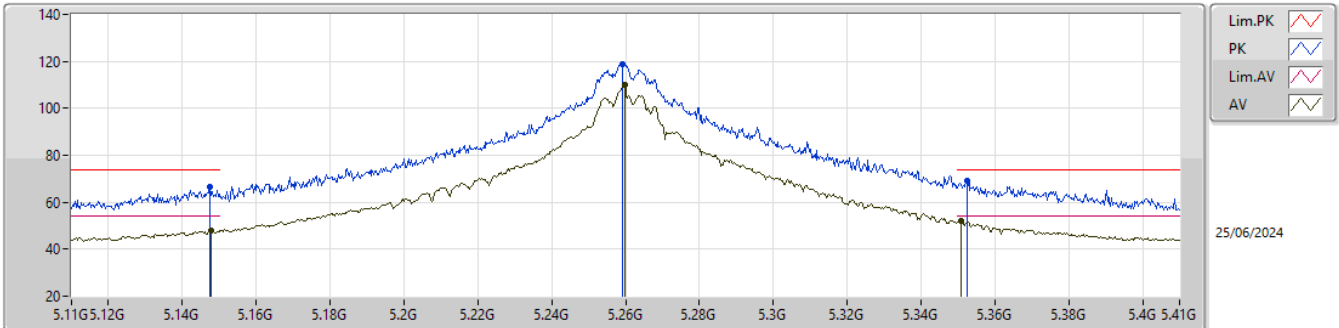


EUT\_Z\_2TX  
Setting 74  
04-D-K-5-10

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |  |  |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|-----------|----------------|---------------|---------|------------|------------|------------|--|--|--|--|
| PK   | 5.1475G      | 66.42             | 74.00             | -7.58          | 71.65         | 3           | Vertical  | 59             | 2.11          | -       | 32.59      | 5.90       | 43.72      |  |  |  |  |
| AV   | 5.1478G      | 48.09             | 54.00             | -5.91          | 53.31         | 3           | Vertical  | 59             | 2.11          | -       | 32.60      | 5.90       | 43.72      |  |  |  |  |
| PK   | 5.2591G      | 118.64            | Inf               | -Inf           | 123.53        | 3           | Vertical  | 59             | 2.11          | -       | 32.72      | 5.98       | 43.59      |  |  |  |  |
| AV   | 5.2597G      | 110.22            | Inf               | -Inf           | 115.11        | 3           | Vertical  | 59             | 2.11          | -       | 32.72      | 5.98       | 43.59      |  |  |  |  |
| PK   | 5.3524G      | 69.27             | 74.00             | -4.73          | 73.77         | 3           | Vertical  | 59             | 2.11          | -       | 32.91      | 6.07       | 43.48      |  |  |  |  |
| AV   | 5.3509G      | 52.03             | 54.00             | -1.97          | 56.54         | 3           | Vertical  | 59             | 2.11          | -       | 32.90      | 6.07       | 43.48      |  |  |  |  |

## 5.25-5.35GHz\_802.11a\_Nss1,(6Mbps)\_2TX

## 5260MHz\_TX

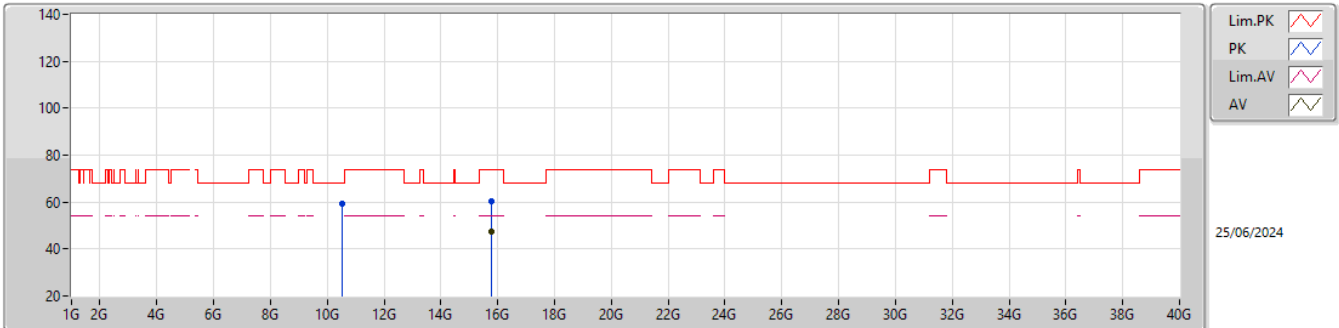


EUT\_Y\_2TX  
Setting 71  
04-D-K-5

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|-----------|----------------|---------------|---------|------------|------------|------------|--|--|--|
| PK   | 10.52207G    | 59.15             | 68.20             | -9.05          | 54.28         | 3           | Vertical  | 63             | 2.38          | -       | 38.74      | 8.98       | 42.85      |  |  |  |
| PK   | 15.77889G    | 60.14             | 74.00             | -13.86         | 52.52         | 3           | Vertical  | 23             | 1.65          | -       | 38.16      | 11.34      | 41.88      |  |  |  |
| AV   | 15.77853G    | 47.16             | 54.00             | -6.84          | 39.54         | 3           | Vertical  | 23             | 1.65          | -       | 38.16      | 11.34      | 41.88      |  |  |  |

## 5.25-5.35GHz\_802.11a\_Nss1,(6Mbps)\_2TX

### 5260MHz\_TX

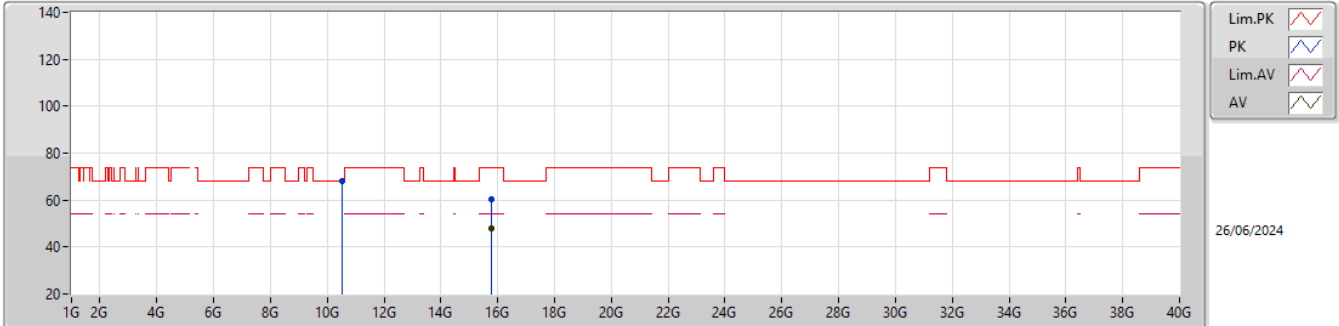


EUT\_Y\_2TX  
Setting 71  
04-D-K-5

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition  | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|------------|----------------|---------------|---------|------------|------------|------------|--|--|--|
| PK   | 10.52237G    | 68.16             | 68.20             | -0.04          | 63.29         | 3           | Horizontal | 133            | 1.92          | -       | 38.74      | 8.98       | 42.85      |  |  |  |
| PK   | 15.77868G    | 60.28             | 74.00             | -13.72         | 52.66         | 3           | Horizontal | 122            | 1.75          | -       | 38.16      | 11.34      | 41.88      |  |  |  |
| AV   | 15.77781G    | 47.78             | 54.00             | -6.22          | 40.16         | 3           | Horizontal | 122            | 1.75          | -       | 38.16      | 11.34      | 41.88      |  |  |  |

5.25-5.35GHz\_802.11a\_Nss1,(6Mbps)\_2TX

5300MHz\_TX

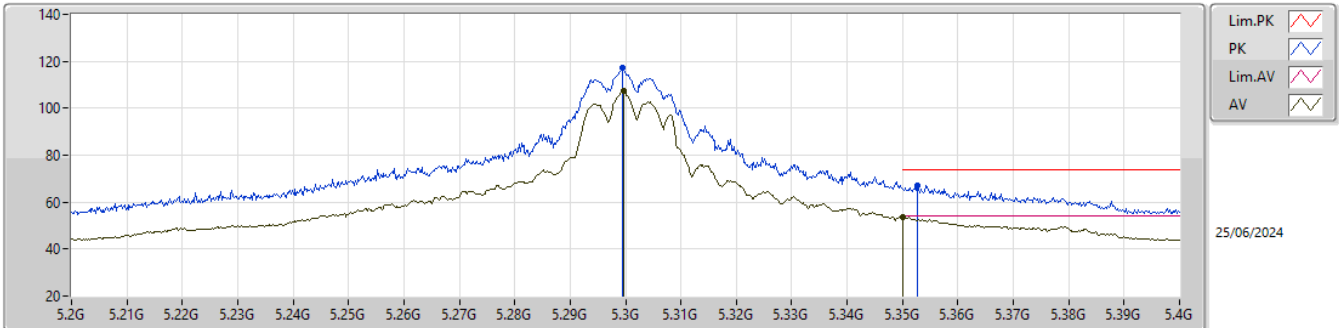


EUT\_Z\_2TX  
Setting 68  
04-D-G-4-10

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|-----------|----------------|---------------|---------|------------|------------|------------|--|--|--|
| PK   | 5.2994G      | 117.49            | Inf               | -Inf           | 122.21        | 3           | Vertical  | 58             | 2.22          | -       | 32.80      | 6.02       | 43.54      |  |  |  |
| AV   | 5.2996G      | 107.56            | Inf               | -Inf           | 112.28        | 3           | Vertical  | 58             | 2.22          | -       | 32.80      | 6.02       | 43.54      |  |  |  |
| PK   | 5.3526G      | 67.14             | 74.00             | -6.86          | 71.64         | 3           | Vertical  | 58             | 2.22          | -       | 32.91      | 6.07       | 43.48      |  |  |  |
| AV   | 5.35G        | 53.83             | 54.00             | -0.17          | 58.34         | 3           | Vertical  | 58             | 2.22          | -       | 32.90      | 6.07       | 43.48      |  |  |  |

## 5.25-5.35GHz\_802.11a\_Nss1,(6Mbps)\_2TX

## 5300MHz\_TX

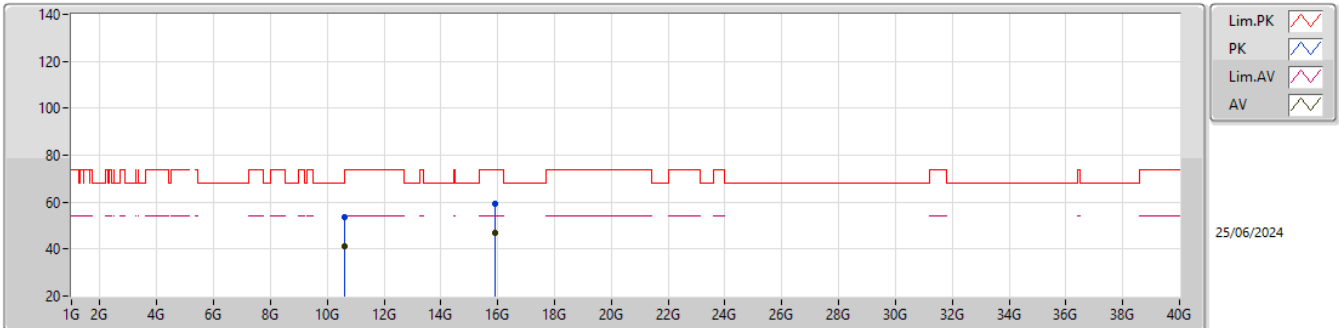


EUT\_Y\_2TX  
Setting 68  
04-D-Y-1

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|-----------|----------------|---------------|---------|------------|------------|------------|--|--|--|
| PK   | 10.60327G    | 53.79             | 74.00             | -20.21         | 48.61         | 3           | Vertical  | 258            | 1.07          | -       | 38.90      | 9.02       | 42.74      |  |  |  |
| AV   | 10.60417G    | 40.99             | 54.00             | -13.01         | 35.81         | 3           | Vertical  | 258            | 1.07          | -       | 38.90      | 9.02       | 42.74      |  |  |  |
| PK   | 15.90246G    | 59.40             | 74.00             | -14.60         | 51.92         | 3           | Vertical  | 24             | 2.28          | -       | 38.21      | 11.40      | 42.13      |  |  |  |
| AV   | 15.9027G     | 46.65             | 54.00             | -7.35          | 39.17         | 3           | Vertical  | 24             | 2.28          | -       | 38.21      | 11.40      | 42.13      |  |  |  |

## 5.25-5.35GHz\_802.11a\_Nss1,(6Mbps)\_2TX

### 5300MHz\_TX

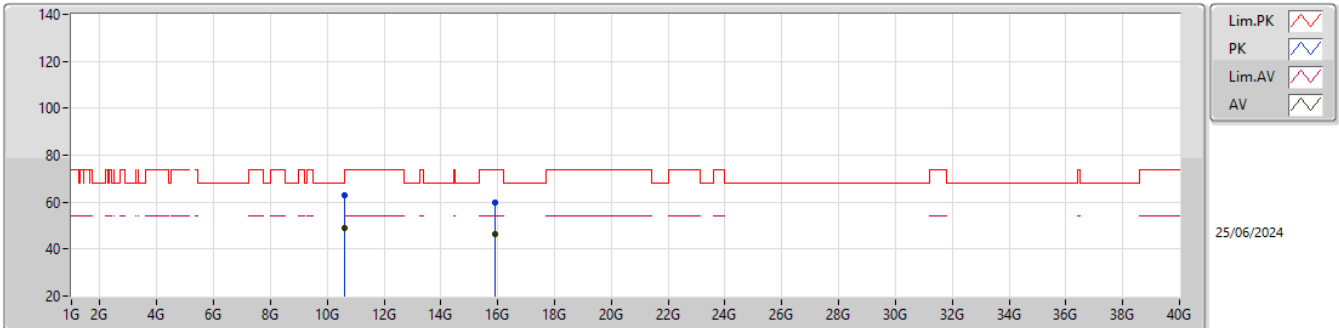


EUT\_Y\_2TX  
Setting 68  
04-D-Y-1

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition  | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|------------|----------------|---------------|---------|------------|------------|------------|--|--|--|
| PK   | 10.60255G    | 62.88             | 74.00             | -11.12         | 57.70         | 3           | Horizontal | 160            | 1.92          | -       | 38.90      | 9.02       | 42.74      |  |  |  |
| AV   | 10.60249G    | 48.91             | 54.00             | -5.09          | 43.73         | 3           | Horizontal | 160            | 1.92          | -       | 38.90      | 9.02       | 42.74      |  |  |  |
| PK   | 15.89721G    | 59.93             | 74.00             | -14.07         | 52.46         | 3           | Horizontal | 122            | 2.36          | -       | 38.19      | 11.40      | 42.12      |  |  |  |
| AV   | 15.903G      | 46.49             | 54.00             | -7.51          | 39.01         | 3           | Horizontal | 122            | 2.36          | -       | 38.21      | 11.40      | 42.13      |  |  |  |

## 5.25-5.35GHz\_802.11a\_Nss1,(6Mbps)\_2TX

## 5320MHz\_TX

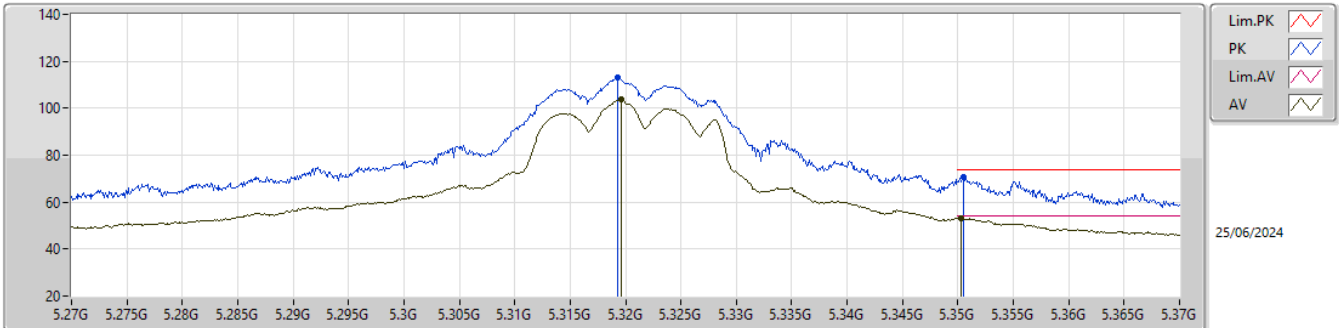


EUT\_Z\_2TX  
Setting 60  
04-D-G-4-10

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|-----------|----------------|---------------|---------|------------|------------|------------|--|--|--|
| PK   | 5.3193G      | 113.14            | Inf               | -Inf           | 117.78        | 3           | Vertical  | 67             | 1.50          | -       | 32.84      | 6.04       | 43.52      |  |  |  |
| AV   | 5.3196G      | 103.76            | Inf               | -Inf           | 108.40        | 3           | Vertical  | 67             | 1.50          | -       | 32.84      | 6.04       | 43.52      |  |  |  |
| PK   | 5.3505G      | 70.63             | 74.00             | -3.37          | 75.14         | 3           | Vertical  | 67             | 1.50          | -       | 32.90      | 6.07       | 43.48      |  |  |  |
| AV   | 5.3503G      | 53.26             | 54.00             | -0.74          | 57.77         | 3           | Vertical  | 67             | 1.50          | -       | 32.90      | 6.07       | 43.48      |  |  |  |

## 5.25-5.35GHz\_802.11a\_Nss1,(6Mbps)\_2TX

### 5320MHz\_TX

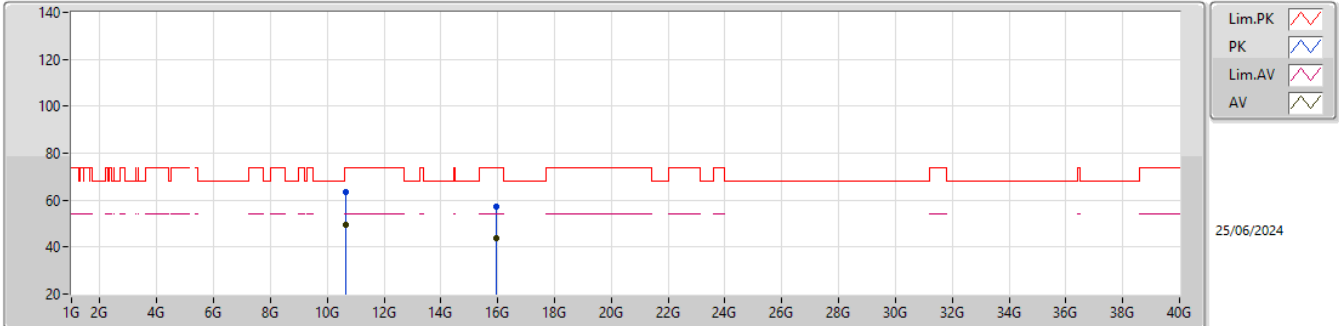


EUT\_Y\_2TX  
Setting 60  
04-D-Y-1

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|-----------|----------------|---------------|---------|------------|------------|------------|--|--|--|
| PK   | 10.64225G    | 63.32             | 74.00             | -10.68         | 58.07         | 3           | Vertical  | 139            | 2.74          | -       | 38.90      | 9.04       | 42.69      |  |  |  |
| AV   | 10.63784G    | 49.23             | 54.00             | -4.77          | 43.99         | 3           | Vertical  | 139            | 2.74          | -       | 38.90      | 9.04       | 42.70      |  |  |  |
| PK   | 15.95775G    | 57.48             | 74.00             | -16.52         | 49.89         | 3           | Vertical  | 106            | 1.48          | -       | 38.40      | 11.43      | 42.24      |  |  |  |
| AV   | 15.95706G    | 43.89             | 54.00             | -10.11         | 36.29         | 3           | Vertical  | 106            | 1.48          | -       | 38.40      | 11.43      | 42.23      |  |  |  |

## 5.25-5.35GHz\_802.11a\_Nss1,(6Mbps)\_2TX

### 5320MHz\_TX

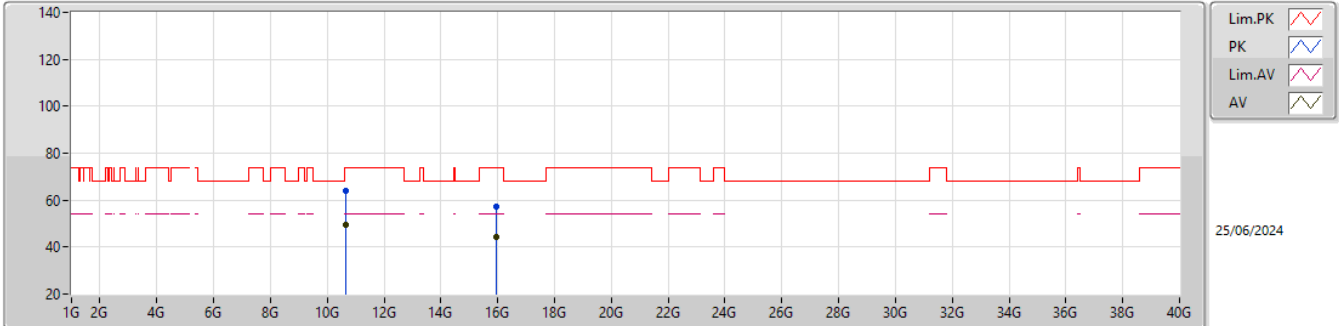


EUT\_Y\_2TX  
Setting 60  
04-D-Y-1

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition  | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|------------|----------------|---------------|---------|------------|------------|------------|--|--|--|
| PK   | 10.64231G    | 63.84             | 74.00             | -10.16         | 58.59         | 3           | Horizontal | 136            | 1.89          | -       | 38.90      | 9.04       | 42.69      |  |  |  |
| AV   | 10.64234G    | 49.58             | 54.00             | -4.42          | 44.33         | 3           | Horizontal | 136            | 1.89          | -       | 38.90      | 9.04       | 42.69      |  |  |  |
| PK   | 15.96177G    | 57.49             | 74.00             | -16.51         | 49.90         | 3           | Horizontal | 125            | 1.80          | -       | 38.40      | 11.43      | 42.24      |  |  |  |
| AV   | 15.95727G    | 44.24             | 54.00             | -9.76          | 36.65         | 3           | Horizontal | 125            | 1.80          | -       | 38.40      | 11.43      | 42.24      |  |  |  |

## 5.47-5.725GHz\_802.11a\_Nss1,(6Mbps)\_2TX

### 5500MHz\_TX

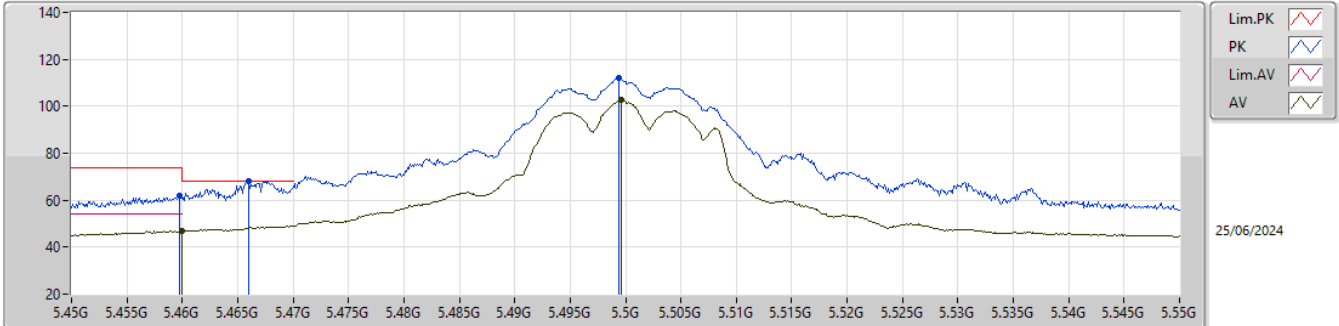


EUT\_Z\_2TX  
Setting 51  
04-D-K-5-10

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|-----------|----------------|---------------|---------|------------|------------|------------|--|--|--|
| PK   | 5.4598G      | 61.71             | 74.00             | -12.29         | 65.56         | 3           | Vertical  | 85             | 1.11          | -       | 33.36      | 6.15       | 43.36      |  |  |  |
| AV   | 5.46G        | 47.00             | 54.00             | -7.00          | 50.85         | 3           | Vertical  | 85             | 1.11          | -       | 33.36      | 6.15       | 43.36      |  |  |  |
| PK   | 5.466G       | 68.17             | 68.20             | -0.03          | 71.97         | 3           | Vertical  | 85             | 1.11          | -       | 33.40      | 6.15       | 43.35      |  |  |  |
| PK   | 5.4994G      | 112.10            | Inf               | -Inf           | 115.64        | 3           | Vertical  | 85             | 1.11          | -       | 33.60      | 6.17       | 43.31      |  |  |  |
| AV   | 5.4996G      | 102.77            | Inf               | -Inf           | 106.31        | 3           | Vertical  | 85             | 1.11          | -       | 33.60      | 6.17       | 43.31      |  |  |  |

## 5.47-5.725GHz\_802.11a\_Nss1,(6Mbps)\_2TX

## 5500MHz\_TX

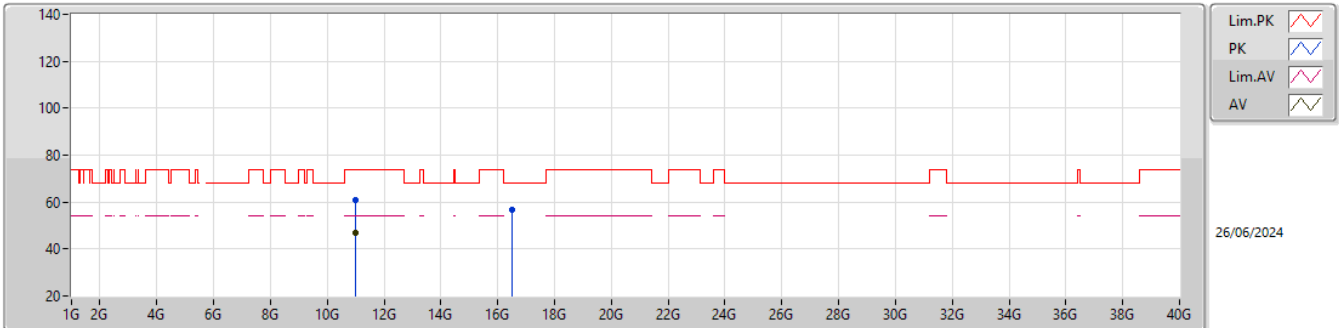


EUT\_Y\_2TX  
Setting 51  
04-D-Y-1

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|-----------|----------------|---------------|---------|------------|------------|------------|--|--|--|
| PK   | 11.00249G    | 60.75             | 74.00             | -13.25         | 54.85         | 3           | Vertical  | 221            | 1.79          | -       | 38.90      | 9.22       | 42.22      |  |  |  |
| AV   | 10.99745G    | 46.77             | 54.00             | -7.23          | 40.86         | 3           | Vertical  | 221            | 1.79          | -       | 38.91      | 9.22       | 42.22      |  |  |  |
| PK   | 16.49616G    | 56.80             | 68.20             | -11.40         | 46.93         | 3           | Vertical  | 70             | 1.49          | -       | 39.29      | 11.85      | 41.27      |  |  |  |

5.47-5.725GHz\_802.11a\_Nss1,(6Mbps)\_2TX

5500MHz\_TX

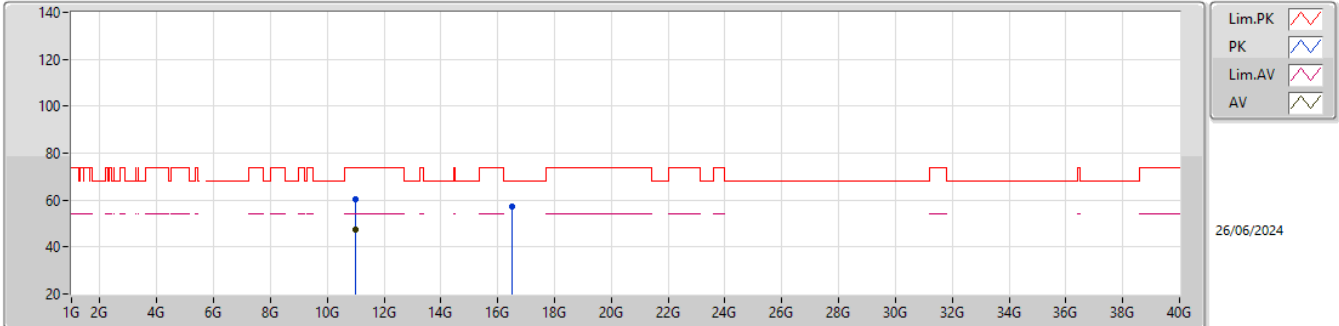


EUT\_Y\_2TX  
Setting 51  
04-D-Y-1

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition  | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|------------|----------------|---------------|---------|------------|------------|------------|--|--|--|
| PK   | 11.00207G    | 60.32             | 74.00             | -13.68         | 54.42         | 3           | Horizontal | 137            | 1.88          | -       | 38.90      | 9.22       | 42.22      |  |  |  |
| AV   | 11.00255G    | 47.28             | 54.00             | -6.72          | 41.39         | 3           | Horizontal | 137            | 1.88          | -       | 38.89      | 9.22       | 42.22      |  |  |  |
| PK   | 16.48713G    | 57.22             | 68.20             | -10.98         | 47.40         | 3           | Horizontal | 206            | 1.52          | -       | 39.27      | 11.84      | 41.29      |  |  |  |

5.47-5.725GHz\_802.11a\_Nss1,(6Mbps)\_2TX

5580MHz\_TX

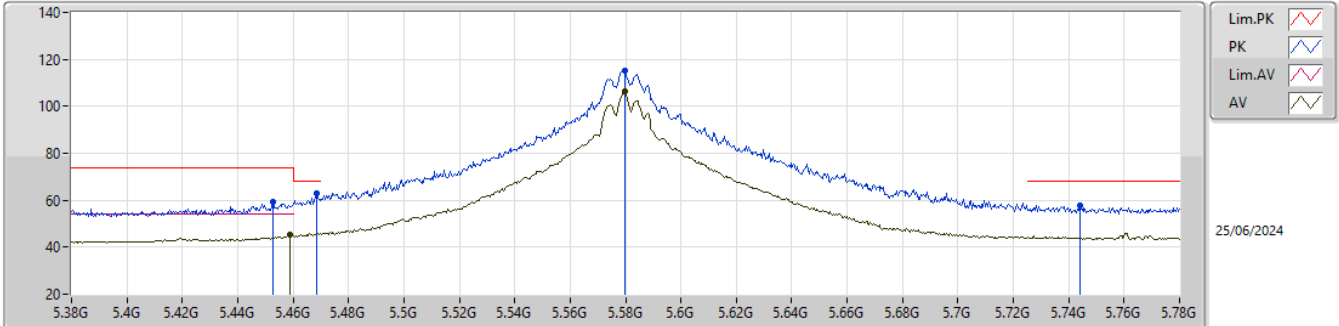


EUT\_Z\_2TX  
Setting 74  
04-D-K-5-10

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|-----------|----------------|---------------|---------|------------|------------|------------|--|--|--|
| PK   | 5.4528G      | 59.41             | 74.00             | -14.59         | 63.30         | 3           | Vertical  | 89             | 1.80          | -       | 33.32      | 6.15       | 43.36      |  |  |  |
| AV   | 5.4588G      | 45.18             | 54.00             | -8.82          | 49.04         | 3           | Vertical  | 89             | 1.80          | -       | 33.35      | 6.15       | 43.36      |  |  |  |
| PK   | 5.4684G      | 63.00             | 68.20             | -5.20          | 66.79         | 3           | Vertical  | 89             | 1.80          | -       | 33.41      | 6.15       | 43.35      |  |  |  |
| PK   | 5.5796G      | 115.41            | Inf               | -Inf           | 118.77        | 3           | Vertical  | 89             | 1.80          | -       | 33.70      | 6.21       | 43.27      |  |  |  |
| AV   | 5.5796G      | 106.42            | Inf               | -Inf           | 109.78        | 3           | Vertical  | 89             | 1.80          | -       | 33.70      | 6.21       | 43.27      |  |  |  |
| PK   | 5.744G       | 57.79             | 68.20             | -10.41         | 60.77         | 3           | Vertical  | 89             | 1.80          | -       | 33.98      | 6.21       | 43.17      |  |  |  |

## 5.47-5.725GHz\_802.11a\_Nss1,(6Mbps)\_2TX

## 5580MHz\_TX

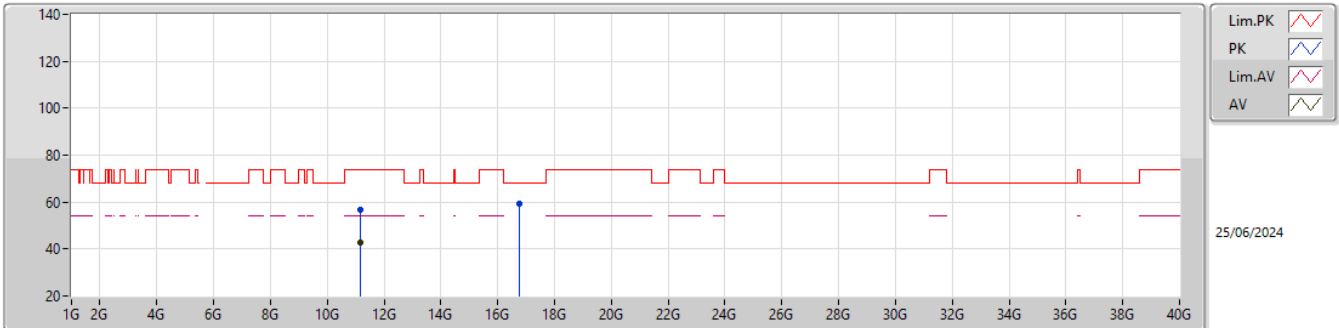


EUT\_Y\_2TX  
Setting 74  
04-D-Y-1

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|-----------|----------------|---------------|---------|------------|------------|------------|--|--|--|
| PK   | 11.1588G     | 56.48             | 74.00             | -17.52         | 51.11         | 3           | Vertical  | 237            | 1.78          | -       | 38.60      | 9.30       | 42.53      |  |  |  |
| AV   | 11.16189G    | 42.89             | 54.00             | -11.11         | 37.53         | 3           | Vertical  | 237            | 1.78          | -       | 38.60      | 9.30       | 42.54      |  |  |  |
| PK   | 16.74237G    | 59.08             | 68.20             | -9.12          | 49.02         | 3           | Vertical  | 50             | 1.29          | -       | 39.77      | 12.05      | 41.76      |  |  |  |

## 5.47-5.725GHz\_802.11a\_Nss1,(6Mbps)\_2TX

## 5580MHz\_TX

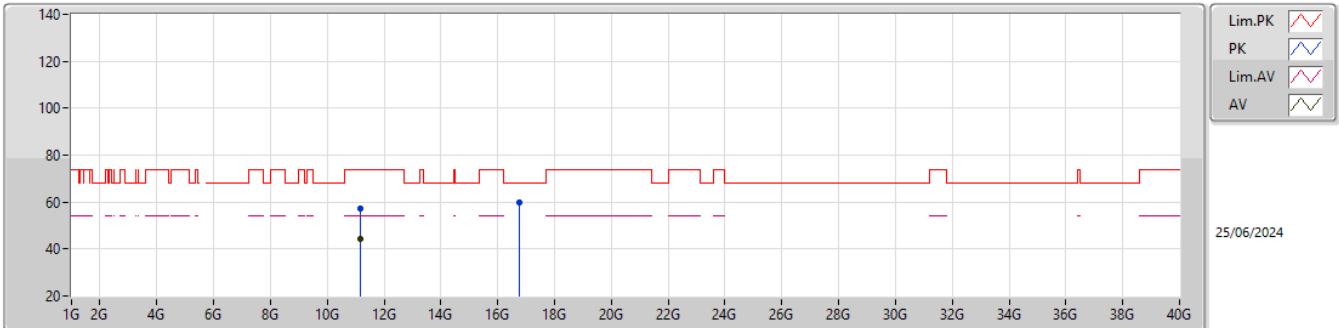


EUT\_Y\_2TX  
Setting 74  
04-D-Y-1

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition  | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|------------|----------------|---------------|---------|------------|------------|------------|--|--|--|
| PK   | 11.15664G    | 57.49             | 74.00             | -16.51         | 52.12         | 3           | Horizontal | 150            | 1.80          | -       | 38.60      | 9.30       | 42.53      |  |  |  |
| AV   | 11.1597G     | 44.28             | 54.00             | -9.72          | 38.91         | 3           | Horizontal | 150            | 1.80          | -       | 38.60      | 9.30       | 42.53      |  |  |  |
| PK   | 16.74204G    | 59.94             | 68.20             | -8.26          | 49.88         | 3           | Horizontal | 122            | 1.80          | -       | 39.77      | 12.05      | 41.76      |  |  |  |

5.47-5.725GHz\_802.11a\_Nss1,(6Mbps)\_2TX

5700MHz\_TX

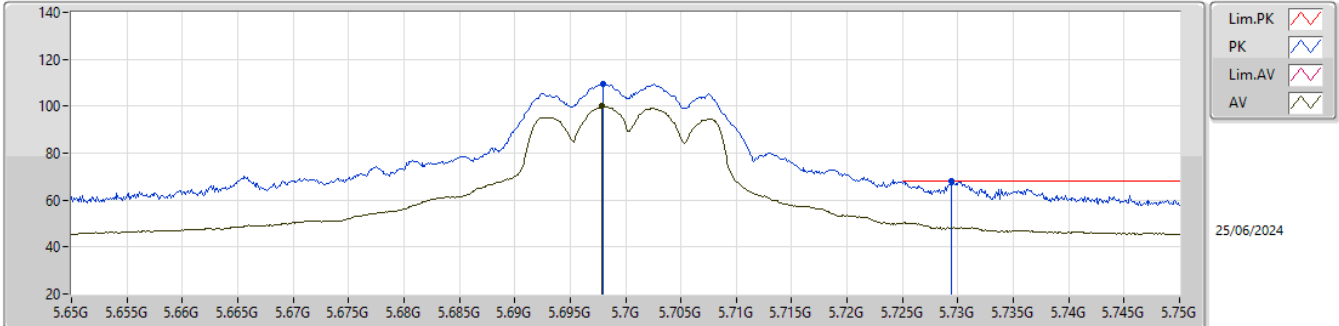


EUT\_Z\_2TX  
Setting 52  
04-D-K-5-10

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|-----------|----------------|---------------|---------|------------|------------|------------|--|--|--|
| PK   | 5.698G       | 109.57            | Inf               | -Inf           | 112.76        | 3           | Vertical  | 0              | 2.18          | -       | 33.80      | 6.21       | 43.20      |  |  |  |
| AV   | 5.6979G      | 99.99             | Inf               | -Inf           | 103.18        | 3           | Vertical  | 0              | 2.18          | -       | 33.80      | 6.21       | 43.20      |  |  |  |
| PK   | 5.7294G      | 67.98             | 68.20             | -0.22          | 71.03         | 3           | Vertical  | 0              | 2.18          | -       | 33.92      | 6.21       | 43.18      |  |  |  |

## 5.47-5.725GHz\_802.11a\_Nss1,(6Mbps)\_2TX

## 5700MHz\_TX

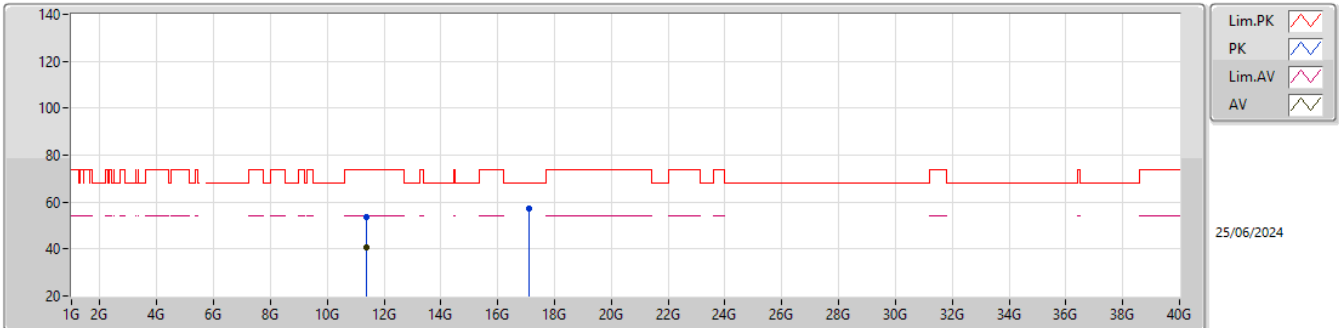


EUT\_Y\_2TX  
Setting 52  
04-D-Y-1

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|-----------|----------------|---------------|---------|------------|------------|------------|--|--|--|
| PK   | 11.38527G    | 53.48             | 74.00             | -20.52         | 48.24         | 3           | Vertical  | 34             | 1.88          | -       | 38.80      | 9.42       | 42.98      |  |  |  |
| AV   | 11.39682G    | 40.61             | 54.00             | -13.39         | 35.39         | 3           | Vertical  | 34             | 1.88          | -       | 38.80      | 9.42       | 43.00      |  |  |  |
| PK   | 17.11464G    | 57.01             | 68.20             | -11.19         | 45.91         | 3           | Vertical  | 259            | 1.40          | -       | 41.03      | 12.35      | 42.28      |  |  |  |

5.47-5.725GHz\_802.11a\_Nss1,(6Mbps)\_2TX


5700MHz\_TX

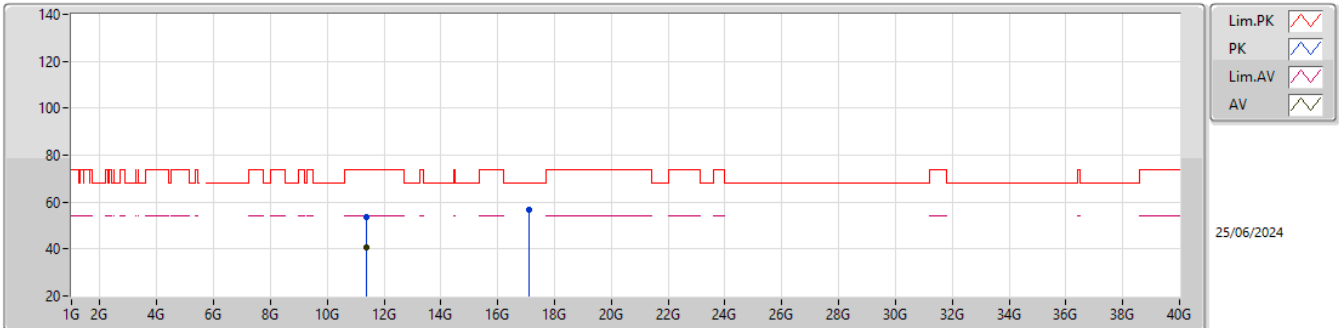EUT\_Y\_2TX  
Setting 52  
04-D-Y-1

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition  | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|------------|----------------|---------------|---------|------------|------------|------------|--|--|--|
| PK   | 11.39346G    | 53.57             | 74.00             | -20.43         | 48.34         | 3           | Horizontal | 358            | 1.71          | -       | 38.80      | 9.42       | 42.99      |  |  |  |
| AV   | 11.39463G    | 40.80             | 54.00             | -13.20         | 35.57         | 3           | Horizontal | 358            | 1.71          | -       | 38.80      | 9.42       | 42.99      |  |  |  |
| PK   | 17.11344G    | 56.53             | 68.20             | -11.67         | 45.43         | 3           | Horizontal | 39             | 1.97          | -       | 41.03      | 12.35      | 42.28      |  |  |  |

## 5.47-5.725GHz\_802.11a\_Nss1,(6Mbps)\_2TX

## 5720MHz Straddle 5.47-5.725GHz\_TX

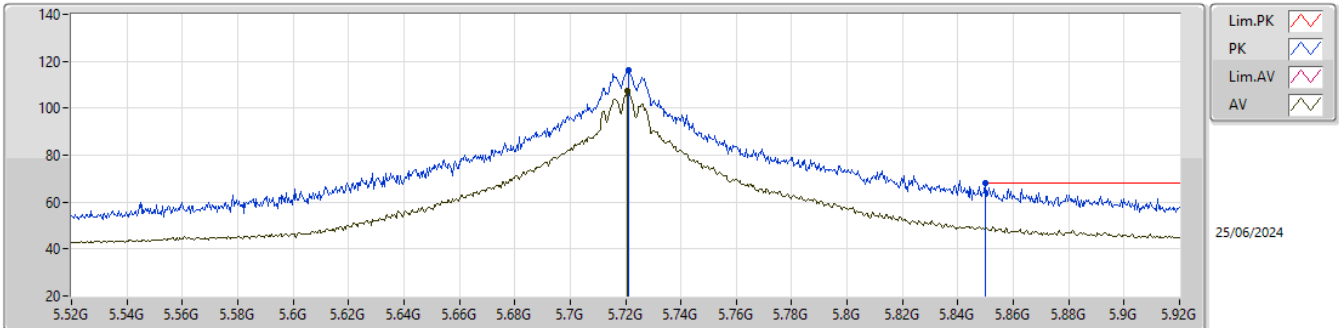


EUT\_Z\_2TX  
Setting 74  
04-D-K-5-10

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|-----------|----------------|---------------|---------|------------|------------|------------|--|--|--|
| PK   | 5.7212G      | 116.43            | Inf               | -Inf           | 119.53        | 3           | Vertical  | 36             | 2.56          | -       | 33.88      | 6.21       | 43.19      |  |  |  |
| AV   | 5.7208G      | 107.45            | Inf               | -Inf           | 110.55        | 3           | Vertical  | 36             | 2.56          | -       | 33.88      | 6.21       | 43.19      |  |  |  |
| PK   | 5.85G        | 68.07             | 68.20             | -0.13          | 70.53         | 3           | Vertical  | 36             | 2.56          | -       | 34.40      | 6.25       | 43.11      |  |  |  |

## 5.47-5.725GHz\_802.11a\_Nss1,(6Mbps)\_2TX

## 5720MHz Straddle 5.47-5.725GHz\_TX

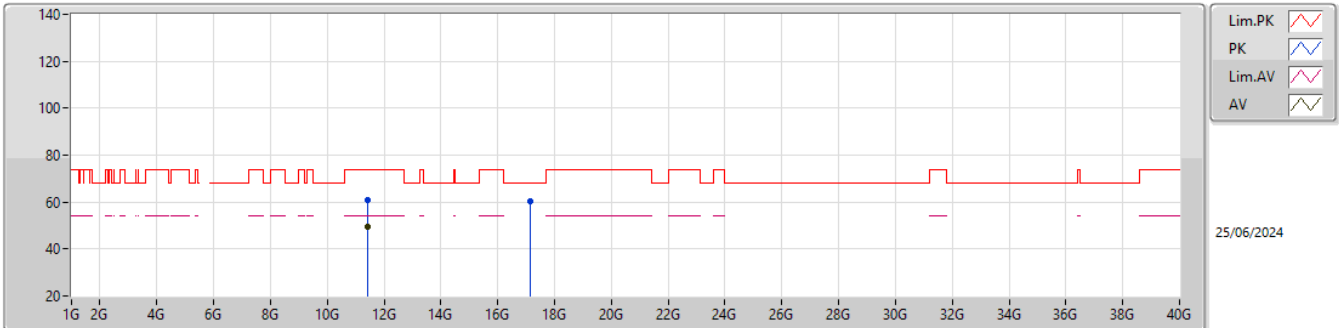


EUT\_Y\_2TX  
Setting 74  
04-D-Y-1

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|-----------|----------------|---------------|---------|------------|------------|------------|--|--|--|
| PK   | 11.43964G    | 60.95             | 74.00             | -13.05         | 55.79         | 3           | Vertical  | 163            | 2.71          | -       | 38.80      | 9.44       | 43.08      |  |  |  |
| AV   | 11.44033G    | 49.50             | 54.00             | -4.50          | 44.34         | 3           | Vertical  | 163            | 2.71          | -       | 38.80      | 9.44       | 43.08      |  |  |  |
| PK   | 17.16114G    | 60.44             | 68.20             | -7.76          | 49.22         | 3           | Vertical  | 84             | 2.29          | -       | 41.12      | 12.38      | 42.28      |  |  |  |

## 5.47-5.725GHz\_802.11a\_Nss1,(6Mbps)\_2TX

### 5720MHz Straddle 5.47-5.725GHz\_TX

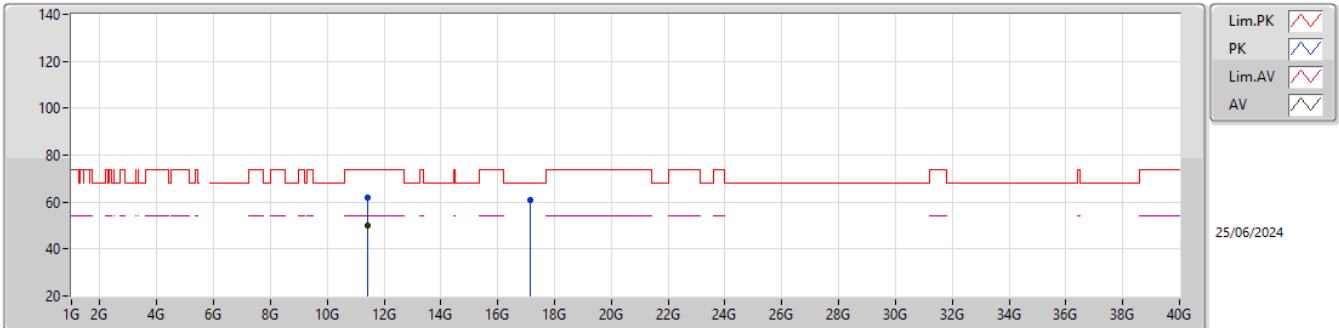


EUT\_Y\_2TX  
Setting 74  
04-D-Y-1

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition  | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|------------|----------------|---------------|---------|------------|------------|------------|--|--|--|
| PK   | 11.43925G    | 61.98             | 74.00             | -12.02         | 56.82         | 3           | Horizontal | 124            | 1.87          | -       | 38.80      | 9.44       | 43.08      |  |  |  |
| AV   | 11.43979G    | 50.15             | 54.00             | -3.85          | 44.99         | 3           | Horizontal | 124            | 1.87          | -       | 38.80      | 9.44       | 43.08      |  |  |  |
| PK   | 17.15712G    | 60.65             | 68.20             | -7.55          | 49.44         | 3           | Horizontal | 122            | 1.79          | -       | 41.11      | 12.38      | 42.28      |  |  |  |

## 5.725-5.85GHz\_802.11a\_Nss1,(6Mbps)\_2TX

## 5745MHz\_TX

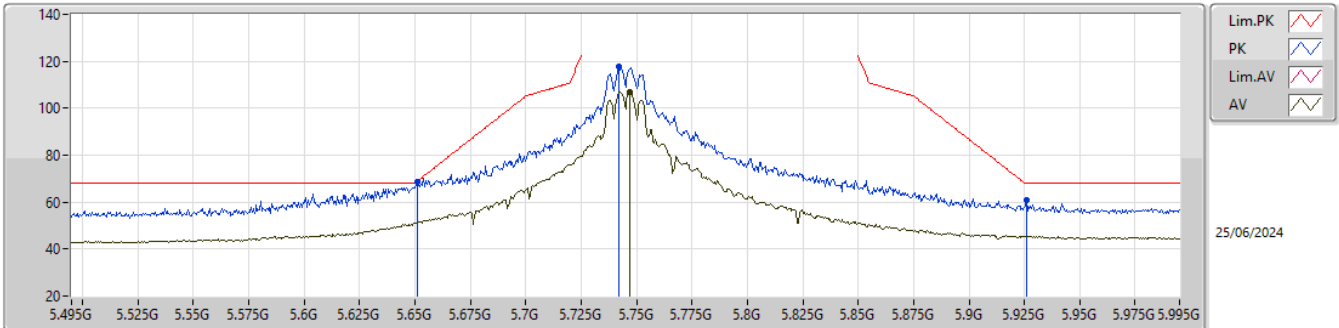


EUT\_Z\_2TX  
Setting 71  
04-D-K-5-10

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|-----------|----------------|---------------|---------|------------|------------|------------|--|--|--|
| PK   | 5.651G       | 68.57             | 68.94             | -0.37          | 71.89         | 3           | Vertical  | 1              | 2.23          | -       | 33.70      | 6.21       | 43.23      |  |  |  |
| PK   | 5.742G       | 117.96            | Inf               | -Inf           | 120.95        | 3           | Vertical  | 1              | 2.23          | -       | 33.97      | 6.21       | 43.17      |  |  |  |
| AV   | 5.747G       | 107.00            | Inf               | -Inf           | 109.97        | 3           | Vertical  | 1              | 2.23          | -       | 33.99      | 6.21       | 43.17      |  |  |  |
| PK   | 5.926G       | 60.62             | 68.20             | -7.58          | 62.52         | 3           | Vertical  | 1              | 2.23          | -       | 34.86      | 6.31       | 43.07      |  |  |  |

## 5.725-5.85GHz\_802.11a\_Nss1,(6Mbps)\_2TX

## 5745MHz\_TX

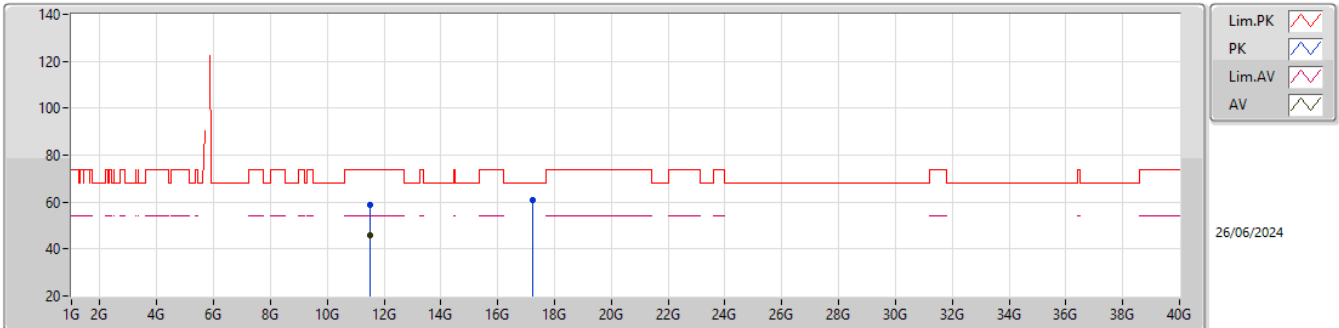


EUT\_Y\_2TX  
Setting 71  
04-D-Y-1

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|-----------|----------------|---------------|---------|------------|------------|------------|--|--|--|
| PK   | 11.49132G    | 58.64             | 74.00             | -15.36         | 53.55         | 3           | Vertical  | 12             | 1.74          | -       | 38.80      | 9.47       | 43.18      |  |  |  |
| AV   | 11.49114G    | 46.05             | 54.00             | -7.95          | 40.96         | 3           | Vertical  | 12             | 1.74          | -       | 38.80      | 9.47       | 43.18      |  |  |  |
| PK   | 17.23605G    | 60.62             | 68.20             | -7.58          | 49.17         | 3           | Vertical  | 91             | 1.14          | -       | 41.27      | 12.45      | 42.27      |  |  |  |

## 5.725-5.85GHz\_802.11a\_Nss1,(6Mbps)\_2TX

## 5745MHz\_TX

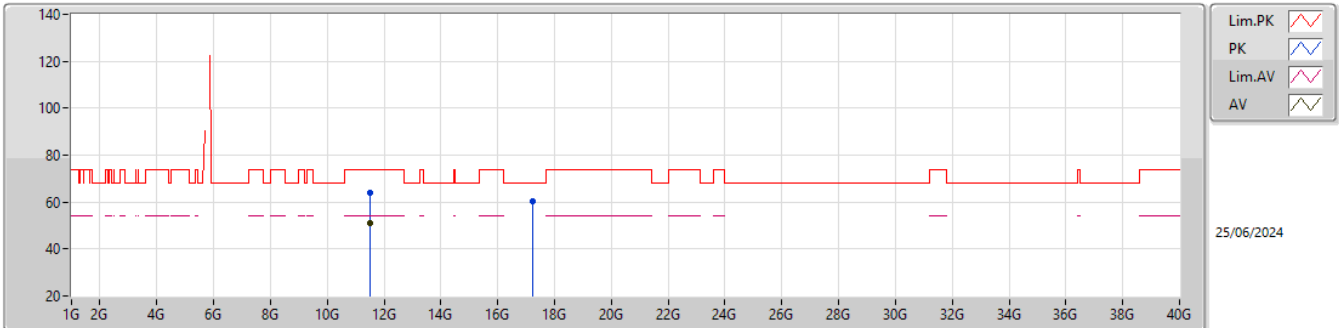


EUT\_Y\_2TX  
Setting 71  
04-D-Y-1

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition  | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|------------|----------------|---------------|---------|------------|------------|------------|--|--|--|
| PK   | 11.49357G    | 64.02             | 74.00             | -9.98          | 58.94         | 3           | Horizontal | 121            | 1.84          | -       | 38.80      | 9.47       | 43.19      |  |  |  |
| AV   | 11.48985G    | 51.15             | 54.00             | -2.85          | 46.06         | 3           | Horizontal | 121            | 1.84          | -       | 38.80      | 9.47       | 43.18      |  |  |  |
| PK   | 17.23536G    | 60.49             | 68.20             | -7.71          | 49.05         | 3           | Horizontal | 116            | 1.75          | -       | 41.27      | 12.44      | 42.27      |  |  |  |

5.725-5.85GHz\_802.11a\_Nss1,(6Mbps)\_2TX

5785MHz\_TX

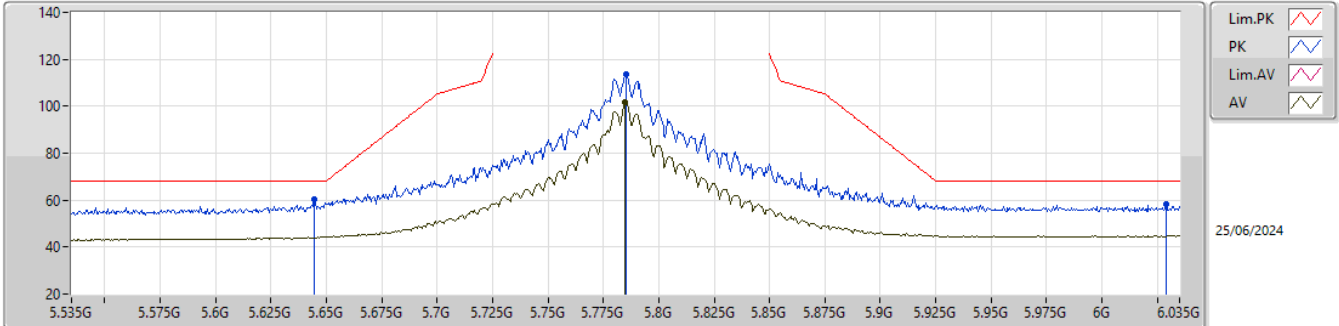


EUT\_Z\_2TX  
Setting 74  
04-D-K-5-10

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |  |  |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|-----------|----------------|---------------|---------|------------|------------|------------|--|--|--|--|
| PK   | 5.6445G      | 60.29             | 68.20             | -7.91          | 63.60         | 3           | Vertical  | 113            | 1.80          | -       | 33.70      | 6.22       | 43.23      |  |  |  |  |
| PK   | 5.785G       | 113.59            | Inf               | -Inf           | 116.40        | 3           | Vertical  | 113            | 1.80          | -       | 34.14      | 6.20       | 43.15      |  |  |  |  |
| AV   | 5.7845G      | 101.63            | Inf               | -Inf           | 104.44        | 3           | Vertical  | 113            | 1.80          | -       | 34.14      | 6.20       | 43.15      |  |  |  |  |
| PK   | 6.029G       | 58.14             | 68.20             | -10.06         | 59.75         | 3           | Vertical  | 113            | 1.80          | -       | 35.00      | 6.41       | 43.02      |  |  |  |  |

## 5.725-5.85GHz\_802.11a\_Nss1,(6Mbps)\_2TX

## 5785MHz\_TX

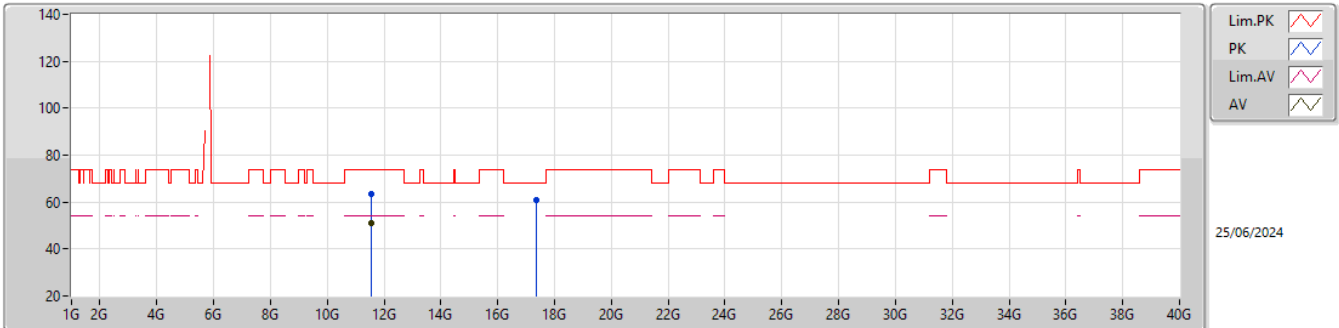


EUT\_Y\_2TX  
Setting 74  
04-D-Y-1

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|-----------|----------------|---------------|---------|------------|------------|------------|--|--|--|
| PK   | 11.56493G    | 63.36             | 74.00             | -10.64         | 58.21         | 3           | Vertical  | 193            | 1.82          | -       | 38.80      | 9.51       | 43.16      |  |  |  |
| AV   | 11.56988G    | 50.80             | 54.00             | -3.20          | 45.65         | 3           | Vertical  | 193            | 1.82          | -       | 38.80      | 9.51       | 43.16      |  |  |  |
| PK   | 17.34978G    | 60.82             | 68.20             | -7.38          | 48.84         | 3           | Vertical  | 3              | 1.21          | -       | 41.70      | 12.54      | 42.26      |  |  |  |

## 5.725-5.85GHz\_802.11a\_Nss1,(6Mbps)\_2TX

## 5785MHz\_TX

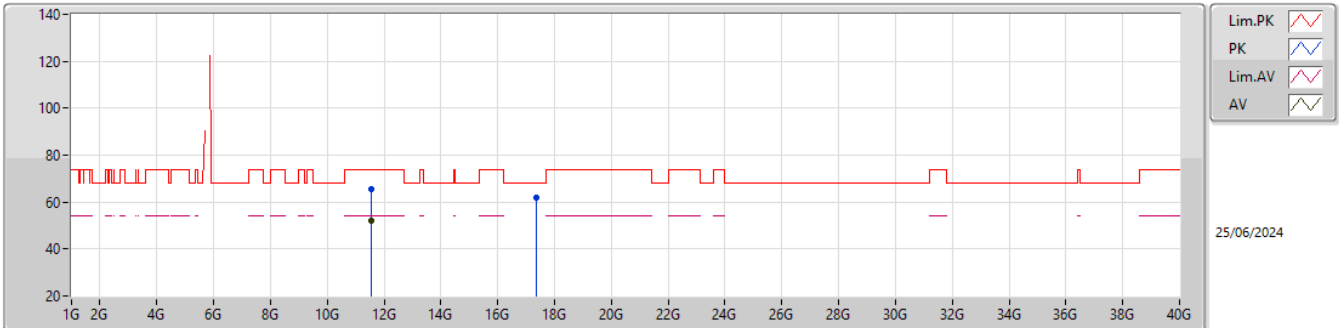


EUT\_Y\_2TX  
Setting 74  
04-D-Y-1

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition  | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|------------|----------------|---------------|---------|------------|------------|------------|--|--|--|
| PK   | 11.56799G    | 65.52             | 74.00             | -8.48          | 60.37         | 3           | Horizontal | 125            | 1.89          | -       | 38.80      | 9.51       | 43.16      |  |  |  |
| AV   | 11.56946G    | 52.26             | 54.00             | -1.74          | 47.11         | 3           | Horizontal | 125            | 1.89          | -       | 38.80      | 9.51       | 43.16      |  |  |  |
| PK   | 17.34552G    | 62.04             | 68.20             | -6.16          | 50.08         | 3           | Horizontal | 116            | 1.80          | -       | 41.69      | 12.53      | 42.26      |  |  |  |

## 5.725-5.85GHz\_802.11a\_Nss1,(6Mbps)\_2TX

### 5825MHz\_TX

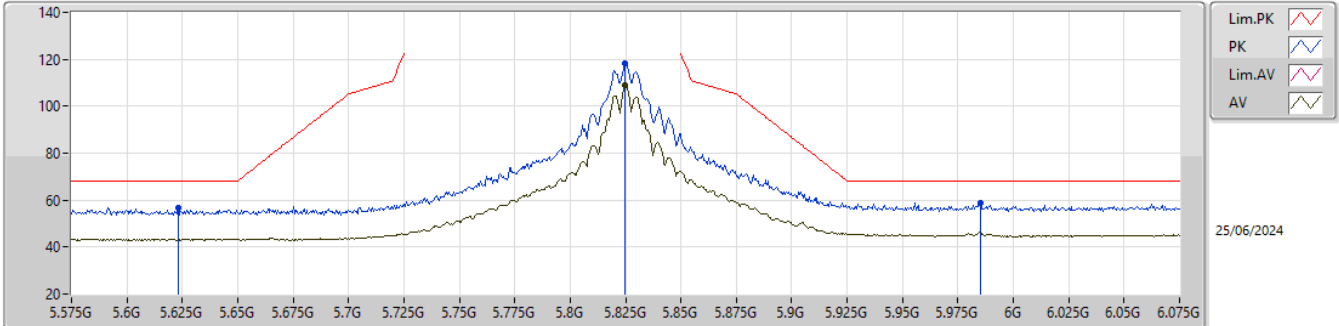


EUT\_Z\_2TX  
Setting 71  
04-D-K-5-10

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|-----------|----------------|---------------|---------|------------|------------|------------|--|--|--|
| PK   | 5.623G       | 56.57             | 68.20             | -11.63         | 59.89         | 3           | Vertical  | 40             | 2.66          | -       | 33.70      | 6.22       | 43.24      |  |  |  |
| PK   | 5.8245G      | 118.36            | Inf               | -Inf           | 120.97        | 3           | Vertical  | 40             | 2.66          | -       | 34.30      | 6.22       | 43.13      |  |  |  |
| AV   | 5.8245G      | 109.19            | Inf               | -Inf           | 111.80        | 3           | Vertical  | 40             | 2.66          | -       | 34.30      | 6.22       | 43.13      |  |  |  |
| PK   | 5.985G       | 58.75             | 68.20             | -9.45          | 60.42         | 3           | Vertical  | 40             | 2.66          | -       | 35.00      | 6.37       | 43.04      |  |  |  |

### 5.725-5.85GHz\_802.11a\_Nss1,(6Mbps)\_2TX

#### 5825MHz\_TX

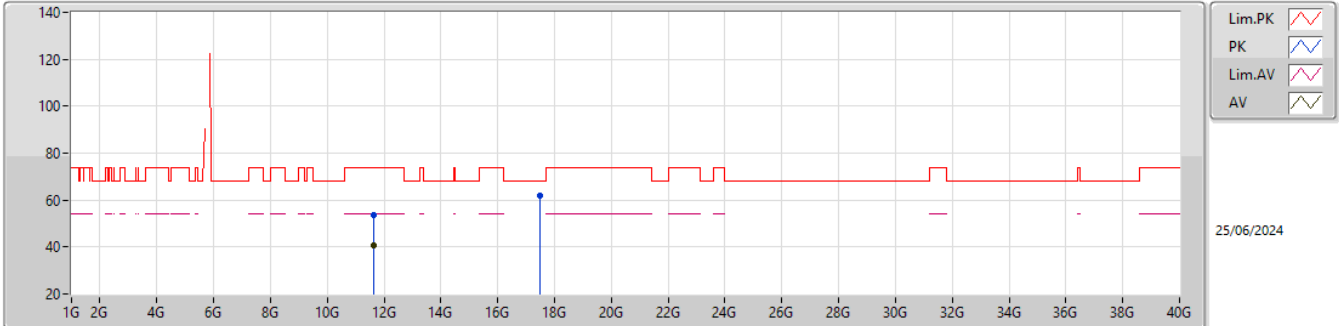


EUT\_Y\_2TX  
Setting 71  
04-D-Y-1

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|-----------|----------------|---------------|---------|------------|------------|------------|--|--|--|
| PK   | 11.64724G    | 53.65             | 74.00             | -20.35         | 48.41         | 3           | Vertical  | 46             | 1.97          | -       | 38.80      | 9.55       | 43.11      |  |  |  |
| AV   | 11.64847G    | 40.87             | 54.00             | -13.13         | 35.63         | 3           | Vertical  | 46             | 1.97          | -       | 38.80      | 9.55       | 43.11      |  |  |  |
| PK   | 17.47635G    | 61.69             | 68.20             | -6.51          | 49.35         | 3           | Vertical  | 218            | 2.81          | -       | 41.95      | 12.64      | 42.25      |  |  |  |

## 5.725-5.85GHz\_802.11a\_Nss1,(6Mbps)\_2TX

## 5825MHz\_TX

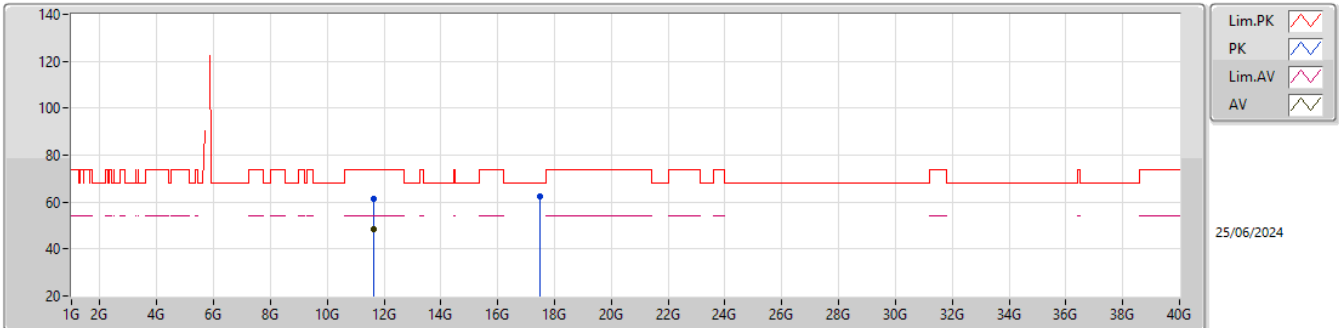


EUT\_Y\_2TX  
Setting 71  
04-D-Y-1

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition  | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|------------|----------------|---------------|---------|------------|------------|------------|--|--|--|
| PK   | 11.64871G    | 61.52             | 74.00             | -12.48         | 56.28         | 3           | Horizontal | 129            | 1.88          | -       | 38.80      | 9.55       | 43.11      |  |  |  |
| AV   | 11.64988G    | 48.45             | 54.00             | -5.55          | 43.21         | 3           | Horizontal | 129            | 1.88          | -       | 38.80      | 9.55       | 43.11      |  |  |  |
| PK   | 17.47194G    | 62.66             | 68.20             | -5.54          | 50.32         | 3           | Horizontal | 116            | 2.30          | -       | 41.96      | 12.63      | 42.25      |  |  |  |

## 5.15-5.25GHz\_802.11ax HEW20\_Nss1,(MCS0)\_2TX

### 5180MHz\_TX

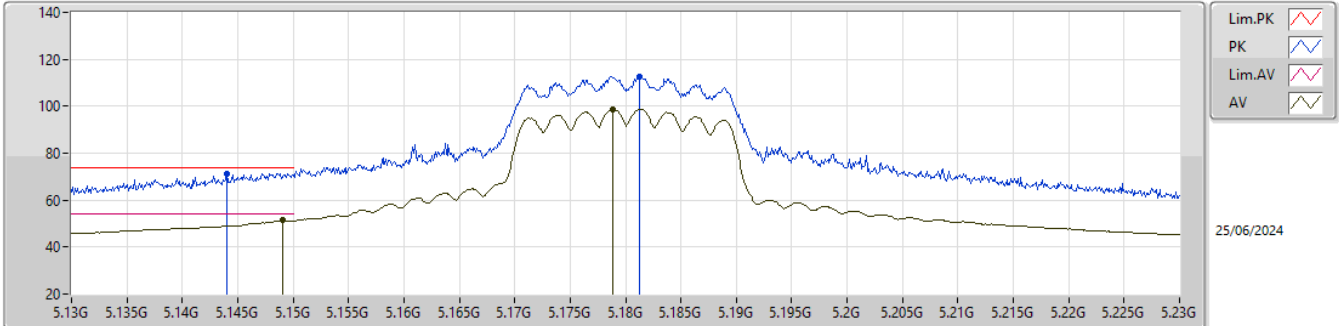


EUT\_Z\_2TX  
Setting 51  
04-D-K-5-10

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|-----------|----------------|---------------|---------|------------|------------|------------|--|--|--|
| PK   | 5.144G       | 71.46             | 74.00             | -2.54          | 76.70         | 3           | Vertical  | 348            | 2.25          | -       | 32.59      | 5.89       | 43.72      |  |  |  |
| AV   | 5.1491G      | 51.48             | 54.00             | -2.52          | 56.70         | 3           | Vertical  | 348            | 2.25          | -       | 32.60      | 5.90       | 43.72      |  |  |  |
| PK   | 5.1813G      | 112.78            | Inf               | -Inf           | 117.89        | 3           | Vertical  | 348            | 2.25          | -       | 32.66      | 5.91       | 43.68      |  |  |  |
| AV   | 5.1788G      | 98.85             | Inf               | -Inf           | 103.96        | 3           | Vertical  | 348            | 2.25          | -       | 32.66      | 5.91       | 43.68      |  |  |  |

## 5.15-5.25GHz\_802.11ax HEW20\_Nss1,(MCS0)\_2TX

### 5180MHz\_TX

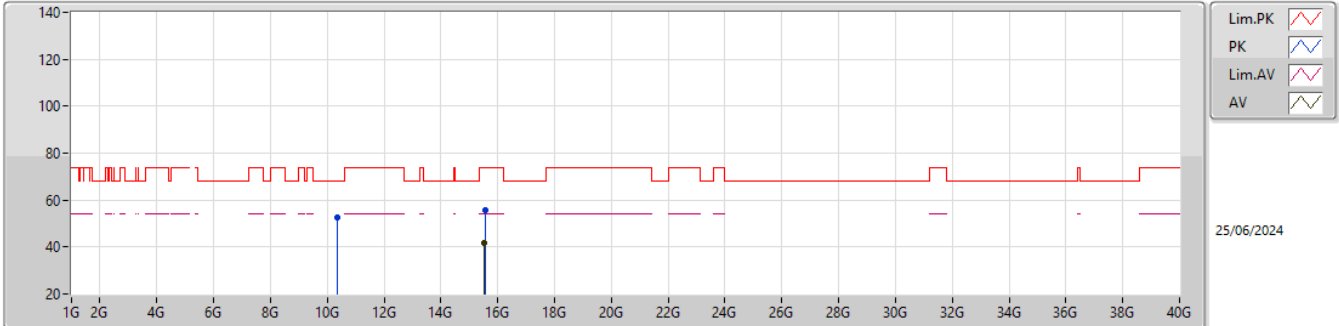


EUT\_Y\_2TX  
Setting 51  
04-D-Y-1

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|-----------|----------------|---------------|---------|------------|------------|------------|--|--|--|
| PK   | 10.34998G    | 52.39             | 68.20             | -15.81         | 47.71         | 3           | Vertical  | 151            | 2.24          | -       | 38.60      | 8.89       | 42.81      |  |  |  |
| PK   | 15.54588G    | 55.86             | 74.00             | -18.14         | 47.75         | 3           | Vertical  | 33             | 1.51          | -       | 38.30      | 11.23      | 41.42      |  |  |  |
| AV   | 15.54189G    | 41.71             | 54.00             | -12.29         | 33.59         | 3           | Vertical  | 33             | 1.51          | -       | 38.30      | 11.23      | 41.41      |  |  |  |

## 5.15-5.25GHz\_802.11ax HEW20\_Nss1,(MCS0)\_2TX

## 5180MHz\_TX

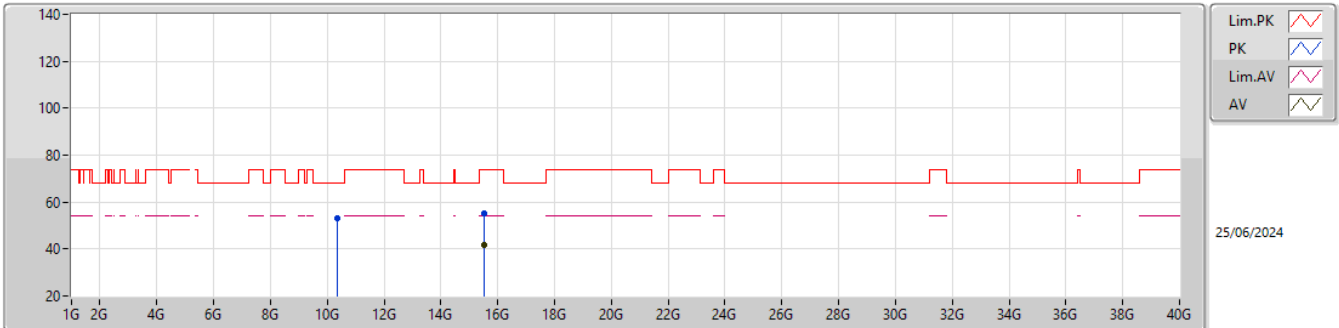


EUT\_Y\_2TX  
Setting 51  
04-D-Y-1

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition  | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|------------|----------------|---------------|---------|------------|------------|------------|--|--|--|
| PK   | 10.34518G    | 53.28             | 68.20             | -14.92         | 48.62         | 3           | Horizontal | 341            | 1.25          | -       | 38.58      | 8.89       | 42.81      |  |  |  |
| PK   | 15.53061G    | 55.28             | 74.00             | -18.72         | 47.14         | 3           | Horizontal | 228            | 1.34          | -       | 38.30      | 11.23      | 41.39      |  |  |  |
| AV   | 15.5361G     | 41.71             | 54.00             | -12.29         | 33.58         | 3           | Horizontal | 228            | 1.34          | -       | 38.30      | 11.23      | 41.40      |  |  |  |

## 5.15-5.25GHz\_802.11ax\_HEW20\_Nss1,(MCS0)\_2TX

## 5200MHz\_TX

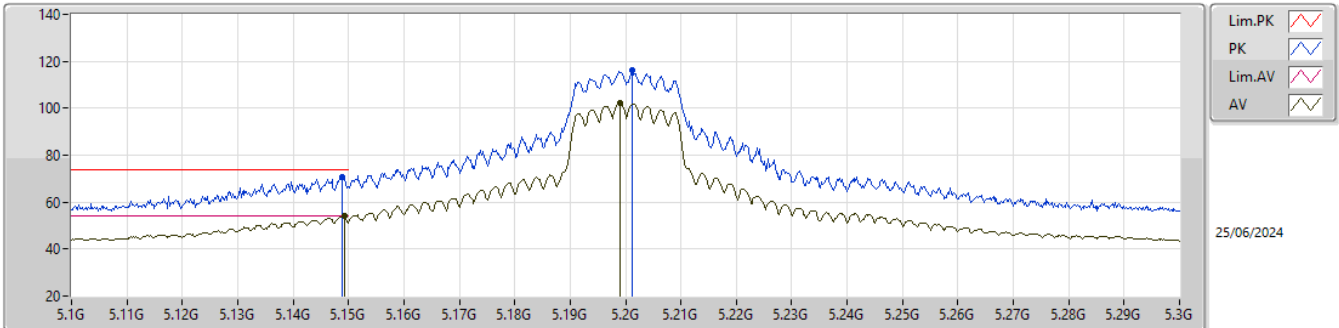


EUT\_Z\_2TX  
Setting 64  
04-D-K-5-10

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|-----------|----------------|---------------|---------|------------|------------|------------|--|--|--|
| PK   | 5.1488G      | 70.59             | 74.00             | -3.41          | 75.81         | 3           | Vertical  | 342            | 2.36          | -       | 32.60      | 5.90       | 43.72      |  |  |  |
| AV   | 5.1492G      | 53.90             | 54.00             | -0.10          | 59.12         | 3           | Vertical  | 342            | 2.36          | -       | 32.60      | 5.90       | 43.72      |  |  |  |
| PK   | 5.2012G      | 116.04            | Inf               | -Inf           | 121.08        | 3           | Vertical  | 342            | 2.36          | -       | 32.70      | 5.92       | 43.66      |  |  |  |
| AV   | 5.199G       | 102.25            | Inf               | -Inf           | 107.29        | 3           | Vertical  | 342            | 2.36          | -       | 32.70      | 5.92       | 43.66      |  |  |  |

## 5.15-5.25GHz\_802.11ax HEW20\_Nss1,(MCS0)\_2TX

## 5200MHz\_TX

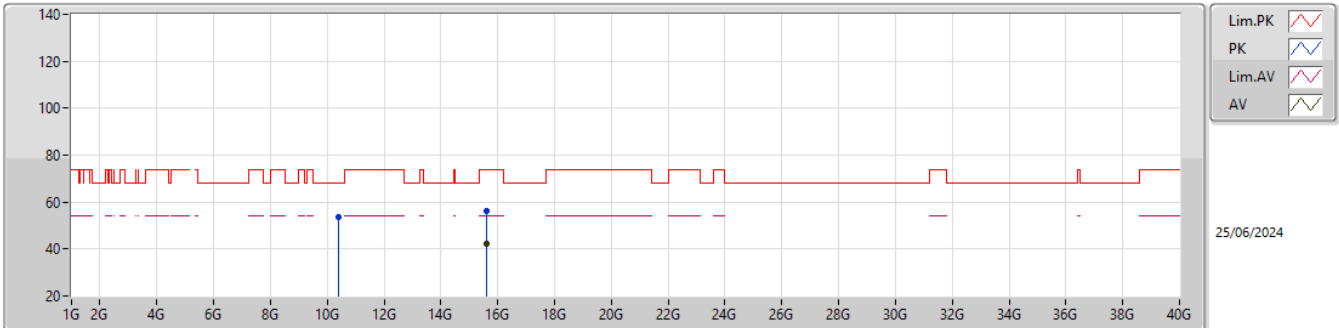


EUT\_Y\_2TX  
Setting 64  
04-D-Y-1

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|-----------|----------------|---------------|---------|------------|------------|------------|--|--|--|
| PK   | 10.40846G    | 53.44             | 68.20             | -14.76         | 48.76         | 3           | Vertical  | 22             | 2.20          | -       | 38.60      | 8.92       | 42.84      |  |  |  |
| PK   | 15.58986G    | 56.01             | 74.00             | -17.99         | 47.88         | 3           | Vertical  | 62             | 1.71          | -       | 38.38      | 11.26      | 41.51      |  |  |  |
| AV   | 15.5979G     | 42.16             | 54.00             | -11.84         | 34.02         | 3           | Vertical  | 62             | 1.71          | -       | 38.40      | 11.26      | 41.52      |  |  |  |

## 5.15-5.25GHz\_802.11ax HEW20\_Nss1,(MCS0)\_2TX

## 5200MHz\_TX

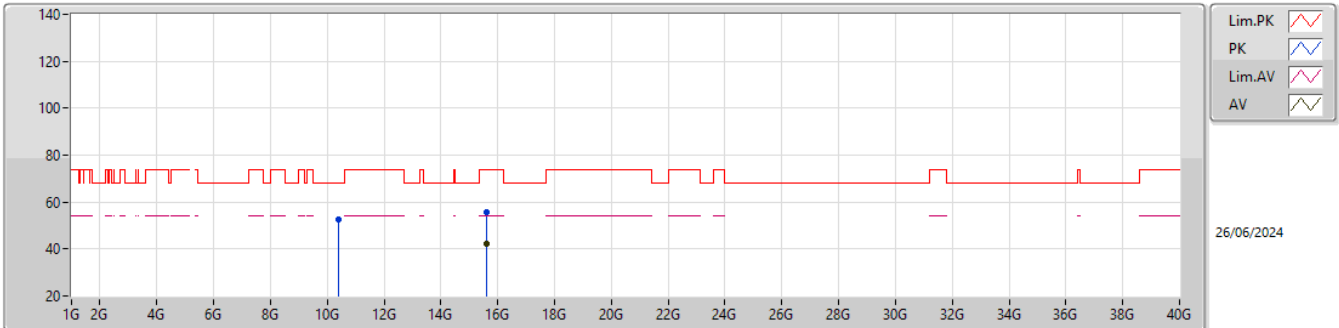


EUT\_Y\_2TX  
Setting 64  
04-D-Y-1

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition  | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|------------|----------------|---------------|---------|------------|------------|------------|--|--|--|
| PK   | 10.4132G     | 52.48             | 68.20             | -15.72         | 47.80         | 3           | Horizontal | 291            | 2.70          | -       | 38.60      | 8.92       | 42.84      |  |  |  |
| PK   | 15.59661G    | 55.90             | 74.00             | -18.10         | 47.77         | 3           | Horizontal | 240            | 1.02          | -       | 38.39      | 11.26      | 41.52      |  |  |  |
| AV   | 15.59577G    | 42.18             | 54.00             | -11.82         | 34.05         | 3           | Horizontal | 240            | 1.02          | -       | 38.39      | 11.26      | 41.52      |  |  |  |

## 5.15-5.25GHz\_802.11ax\_HEW20\_Nss1,(MCS0)\_2TX

## 5240MHz\_TX

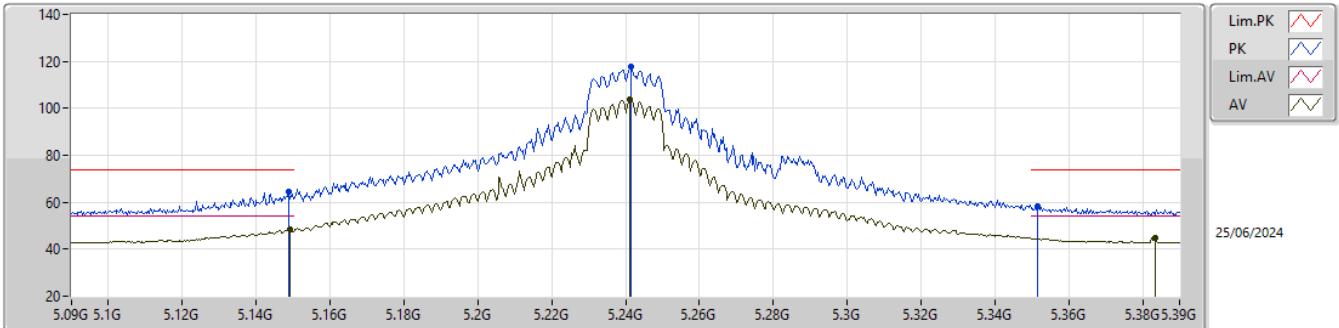


EUT\_Z\_2TX  
Setting 70  
04-D-K-5-10

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |  |  |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|-----------|----------------|---------------|---------|------------|------------|------------|--|--|--|--|
| PK   | 5.1488G      | 64.38             | 74.00             | -9.62          | 69.60         | 3           | Vertical  | 344            | 2.34          | -       | 32.60      | 5.90       | 43.72      |  |  |  |  |
| AV   | 5.1491G      | 48.19             | 54.00             | -5.81          | 53.41         | 3           | Vertical  | 344            | 2.34          | -       | 32.60      | 5.90       | 43.72      |  |  |  |  |
| PK   | 5.2415G      | 117.52            | Inf               | -Inf           | 122.47        | 3           | Vertical  | 344            | 2.34          | -       | 32.70      | 5.96       | 43.61      |  |  |  |  |
| AV   | 5.2412G      | 103.68            | Inf               | -Inf           | 108.63        | 3           | Vertical  | 344            | 2.34          | -       | 32.70      | 5.96       | 43.61      |  |  |  |  |
| PK   | 5.3516G      | 58.09             | 74.00             | -15.91         | 62.59         | 3           | Vertical  | 344            | 2.34          | -       | 32.91      | 6.07       | 43.48      |  |  |  |  |
| AV   | 5.3834G      | 44.83             | 54.00             | -9.17          | 49.15         | 3           | Vertical  | 344            | 2.34          | -       | 33.03      | 6.10       | 43.45      |  |  |  |  |

## 5.15-5.25GHz\_802.11ax HEW20\_Nss1,(MCS0)\_2TX

## 5240MHz\_TX

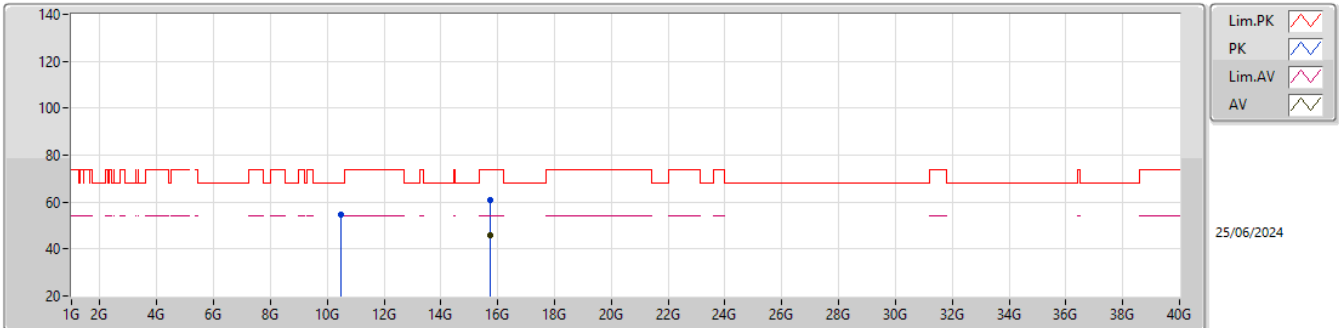


EUT Y\_2TX  
Setting 70  
04-D-Y-1

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|-----------|----------------|---------------|---------|------------|------------|------------|--|--|--|
| PK   | 10.48192G    | 54.85             | 68.20             | -13.35         | 50.10         | 3           | Vertical  | 176            | 2.18          | -       | 38.66      | 8.96       | 42.87      |  |  |  |
| PK   | 15.72159G    | 60.66             | 74.00             | -13.34         | 53.18         | 3           | Vertical  | 145            | 1.76          | -       | 37.93      | 11.32      | 41.77      |  |  |  |
| AV   | 15.72153G    | 45.69             | 54.00             | -8.31          | 38.21         | 3           | Vertical  | 145            | 1.76          | -       | 37.93      | 11.32      | 41.77      |  |  |  |

## 5.15-5.25GHz\_802.11ax HEW20\_Nss1,(MCS0)\_2TX

## 5240MHz\_TX

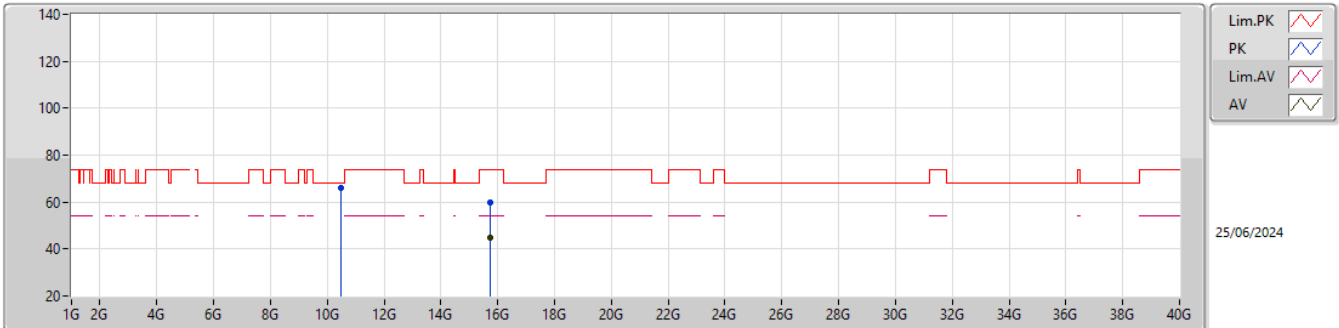


EUT Y\_2TX  
Setting 70  
04-D-Y-1

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition  | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|------------|----------------|---------------|---------|------------|------------|------------|--|--|--|
| PK   | 10.4788G     | 65.79             | 68.20             | -2.41          | 61.05         | 3           | Horizontal | 126            | 1.95          | -       | 38.66      | 8.95       | 42.87      |  |  |  |
| PK   | 15.72372G    | 59.73             | 74.00             | -14.27         | 52.24         | 3           | Horizontal | 126            | 2.25          | -       | 37.94      | 11.32      | 41.77      |  |  |  |
| AV   | 15.71616G    | 45.01             | 54.00             | -8.99          | 37.55         | 3           | Horizontal | 126            | 2.25          | -       | 37.90      | 11.32      | 41.76      |  |  |  |

## 5.25-5.35GHz\_802.11ax\_HEW20\_Nss1,(MCS0)\_2TX

## 5260MHz\_TX

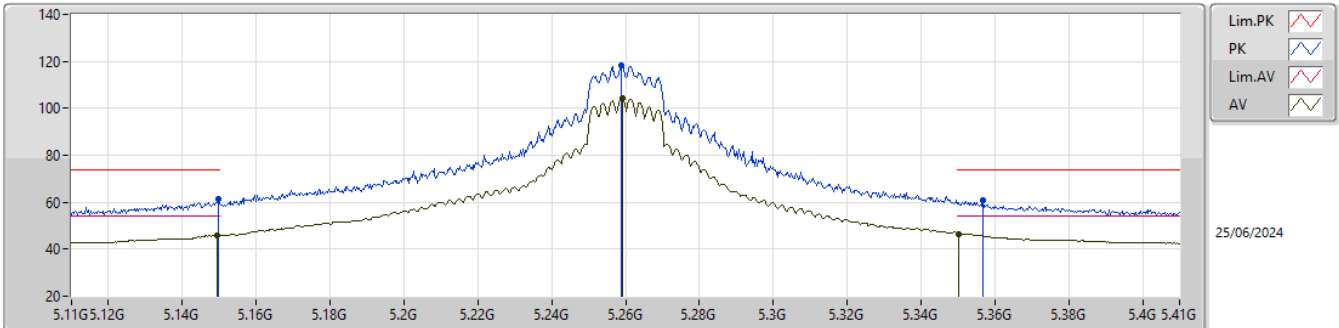


EUT\_Z\_2TX  
Setting 73  
04-D-K-5-10

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|-----------|----------------|---------------|---------|------------|------------|------------|--|--|--|
| PK   | 5.1499G      | 61.21             | 74.00             | -12.79         | 66.43         | 3           | Vertical  | 350            | 2.45          | -       | 32.60      | 5.90       | 43.72      |  |  |  |
| AV   | 5.1493G      | 45.97             | 54.00             | -8.03          | 51.19         | 3           | Vertical  | 350            | 2.45          | -       | 32.60      | 5.90       | 43.72      |  |  |  |
| PK   | 5.2588G      | 118.19            | Inf               | -Inf           | 123.08        | 3           | Vertical  | 350            | 2.45          | -       | 32.72      | 5.98       | 43.59      |  |  |  |
| AV   | 5.2591G      | 104.34            | Inf               | -Inf           | 109.23        | 3           | Vertical  | 350            | 2.45          | -       | 32.72      | 5.98       | 43.59      |  |  |  |
| PK   | 5.3569G      | 60.67             | 74.00             | -13.33         | 65.14         | 3           | Vertical  | 350            | 2.45          | -       | 32.93      | 6.08       | 43.48      |  |  |  |
| AV   | 5.3503G      | 46.62             | 54.00             | -7.38          | 51.13         | 3           | Vertical  | 350            | 2.45          | -       | 32.90      | 6.07       | 43.48      |  |  |  |

5.25-5.35GHz\_802.11ax HEW20\_Nss1,(MCS0)\_2TX

5260MHz\_TX

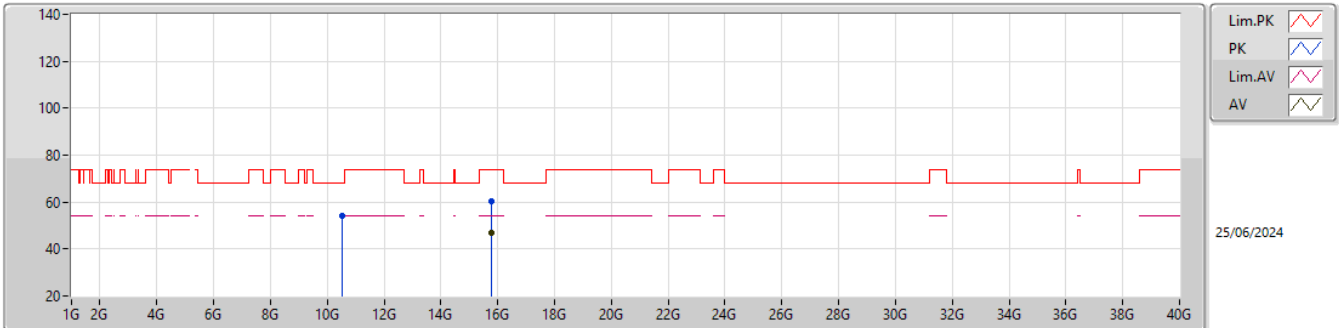


EUT Y\_2TX  
Setting 73  
04-D-Y-1

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|-----------|----------------|---------------|---------|------------|------------|------------|--|--|--|
| PK   | 10.51667G    | 54.30             | 68.20             | -13.90         | 49.46         | 3           | Vertical  | 18             | 1.85          | -       | 38.73      | 8.97       | 42.86      |  |  |  |
| PK   | 15.77622G    | 60.24             | 74.00             | -13.76         | 52.63         | 3           | Vertical  | 184            | 2.84          | -       | 38.15      | 11.34      | 41.88      |  |  |  |
| AV   | 15.77607G    | 47.07             | 54.00             | -6.93          | 39.46         | 3           | Vertical  | 184            | 2.84          | -       | 38.15      | 11.34      | 41.88      |  |  |  |

5.25-5.35GHz\_802.11ax HEW20\_Nss1,(MCS0)\_2TX

5260MHz\_TX

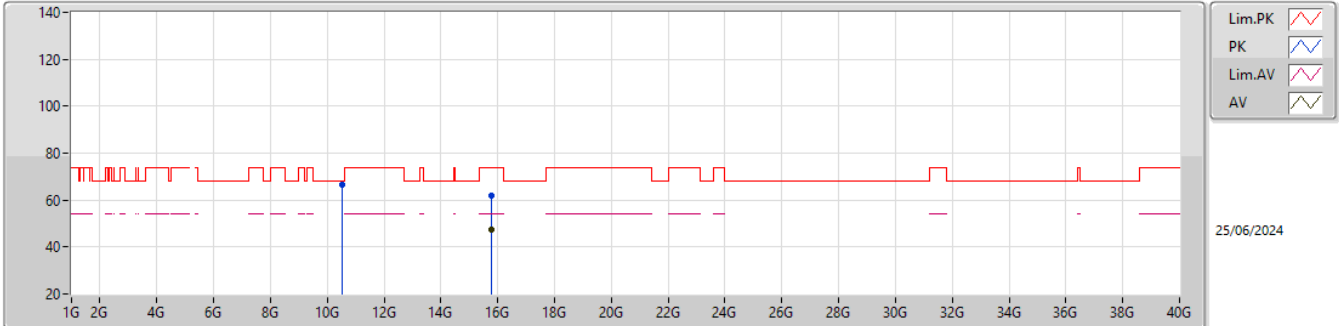


EUT\_Y\_2TX  
Setting 73  
04-D-Y-1

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition  | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|------------|----------------|---------------|---------|------------|------------|------------|--|--|--|
| PK   | 10.51946G    | 66.44             | 68.20             | -1.76          | 61.58         | 3           | Horizontal | 131            | 1.97          | -       | 38.74      | 8.97       | 42.85      |  |  |  |
| PK   | 15.78159G    | 61.79             | 74.00             | -12.21         | 54.17         | 3           | Horizontal | 127            | 2.36          | -       | 38.16      | 11.35      | 41.89      |  |  |  |
| AV   | 15.77616G    | 47.21             | 54.00             | -6.79          | 39.60         | 3           | Horizontal | 127            | 2.36          | -       | 38.15      | 11.34      | 41.88      |  |  |  |

5.25-5.35GHz\_802.11ax\_HEW20\_Nss1,(MCS0)\_2TX

5300MHz\_TX

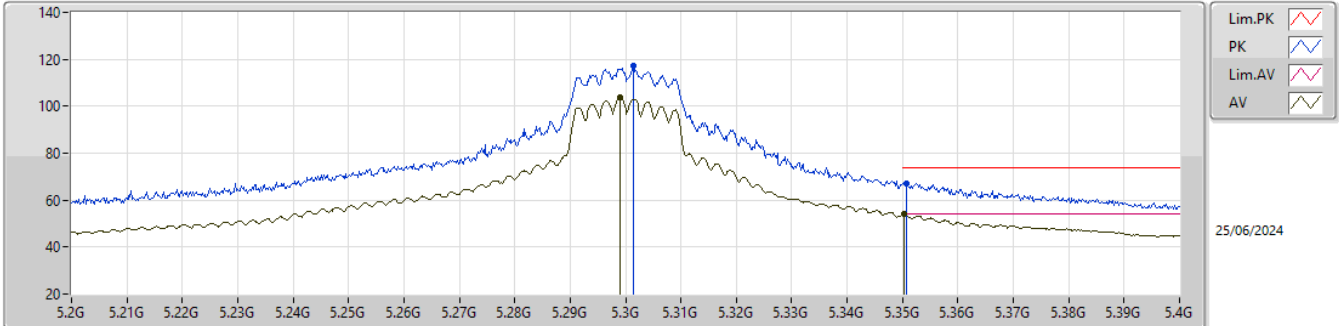


EUT\_Z\_2TX  
Setting 69  
04-D-K-5-10

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|-----------|----------------|---------------|---------|------------|------------|------------|--|--|--|
| PK   | 5.3014G      | 117.21            | Inf               | -Inf           | 121.93        | 3           | Vertical  | 344            | 2.08          | -       | 32.80      | 6.02       | 43.54      |  |  |  |
| AV   | 5.299G       | 103.65            | Inf               | -Inf           | 108.37        | 3           | Vertical  | 344            | 2.08          | -       | 32.80      | 6.02       | 43.54      |  |  |  |
| PK   | 5.3508G      | 67.26             | 74.00             | -6.74          | 71.77         | 3           | Vertical  | 344            | 2.08          | -       | 32.90      | 6.07       | 43.48      |  |  |  |
| AV   | 5.3502G      | 53.98             | 54.00             | -0.02          | 58.49         | 3           | Vertical  | 344            | 2.08          | -       | 32.90      | 6.07       | 43.48      |  |  |  |

## 5.25-5.35GHz\_802.11ax HEW20\_Nss1,(MCS0)\_2TX

## 5300MHz\_TX

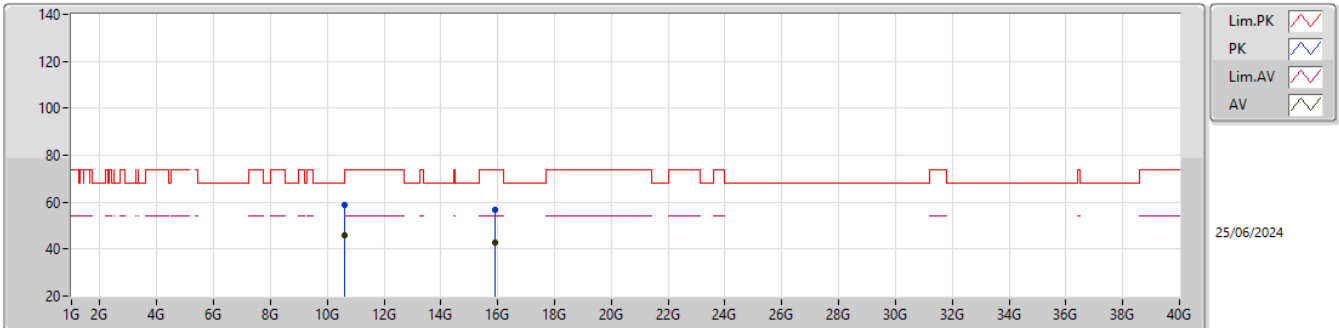


EUT\_Y\_2TX  
Setting 69  
04-D-Y-1

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|-----------|----------------|---------------|---------|------------|------------|------------|--|--|--|
| PK   | 10.59922G    | 58.92             | 68.20             | -9.28          | 53.75         | 3           | Vertical  | 181            | 1.14          | -       | 38.90      | 9.02       | 42.75      |  |  |  |
| AV   | 10.60153G    | 45.61             | 54.00             | -8.39          | 40.44         | 3           | Vertical  | 181            | 1.14          | -       | 38.90      | 9.02       | 42.75      |  |  |  |
| PK   | 15.89187G    | 56.70             | 74.00             | -17.30         | 49.23         | 3           | Vertical  | 7              | 2.82          | -       | 38.18      | 11.40      | 42.11      |  |  |  |
| AV   | 15.90126G    | 42.82             | 54.00             | -11.18         | 35.33         | 3           | Vertical  | 7              | 2.82          | -       | 38.21      | 11.40      | 42.12      |  |  |  |

## 5.25-5.35GHz\_802.11ax HEW20\_Nss1,(MCS0)\_2TX

## 5300MHz\_TX

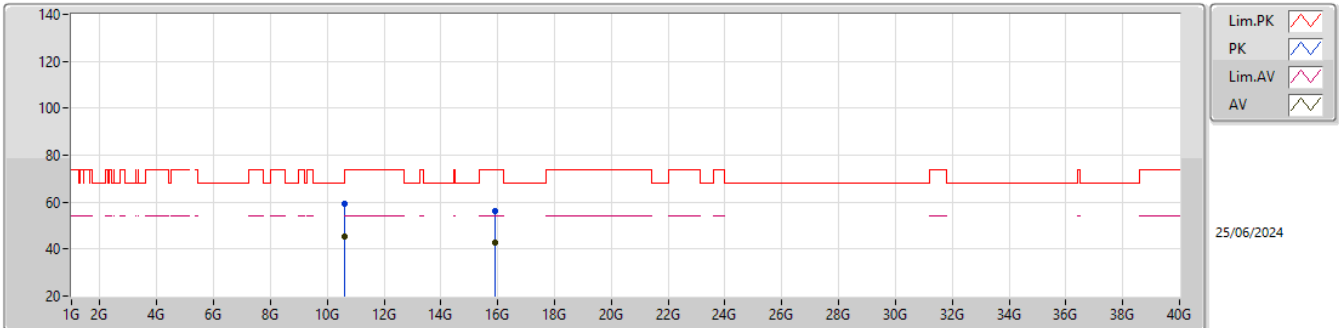


EUT\_Y\_2TX  
Setting 69  
04-D-Y-1

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition  | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|------------|----------------|---------------|---------|------------|------------|------------|--|--|--|
| PK   | 10.60357G    | 59.23             | 74.00             | -14.77         | 54.05         | 3           | Horizontal | 145            | 1.80          | -       | 38.90      | 9.02       | 42.74      |  |  |  |
| AV   | 10.60156G    | 45.51             | 54.00             | -8.49          | 40.34         | 3           | Horizontal | 145            | 1.80          | -       | 38.90      | 9.02       | 42.75      |  |  |  |
| PK   | 15.90147G    | 56.07             | 74.00             | -17.93         | 48.58         | 3           | Horizontal | 122            | 2.03          | -       | 38.21      | 11.40      | 42.12      |  |  |  |
| AV   | 15.89613G    | 42.72             | 54.00             | -11.28         | 35.24         | 3           | Horizontal | 122            | 2.03          | -       | 38.19      | 11.40      | 42.11      |  |  |  |

5.25-5.35GHz\_802.11ax HEW20\_Nss1,(MCS0)\_2TX

5320MHz\_TX

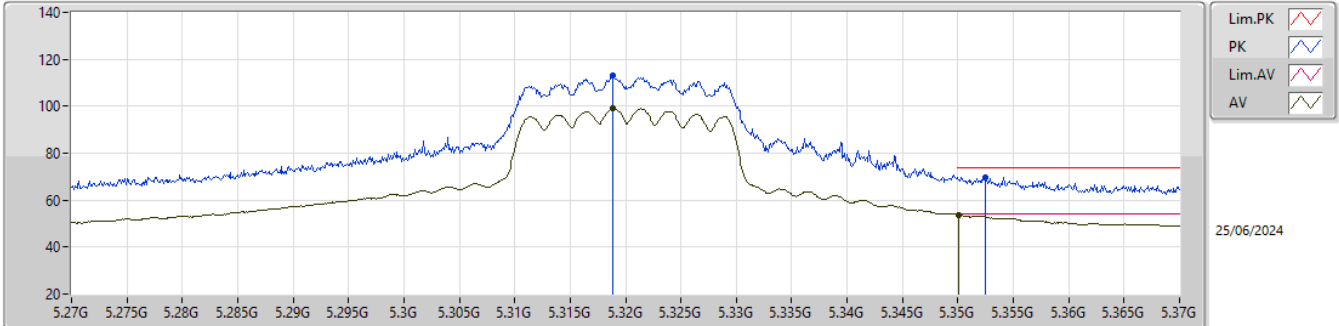


EUT\_Z\_2TX  
Setting 58  
04-D-K-5-10

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|-----------|----------------|---------------|---------|------------|------------|------------|--|--|--|
| PK   | 5.3188G      | 113.19            | Inf               | -Inf           | 117.83        | 3           | Vertical  | 344            | 2.17          | -       | 32.84      | 6.04       | 43.52      |  |  |  |
| AV   | 5.3189G      | 98.96             | Inf               | -Inf           | 103.60        | 3           | Vertical  | 344            | 2.17          | -       | 32.84      | 6.04       | 43.52      |  |  |  |
| PK   | 5.3525G      | 69.78             | 74.00             | -4.22          | 74.28         | 3           | Vertical  | 344            | 2.17          | -       | 32.91      | 6.07       | 43.48      |  |  |  |
| AV   | 5.3501G      | 53.78             | 54.00             | -0.22          | 58.29         | 3           | Vertical  | 344            | 2.17          | -       | 32.90      | 6.07       | 43.48      |  |  |  |

## 5.25-5.35GHz\_802.11ax HEW20\_Nss1,(MCS0)\_2TX

## 5320MHz\_TX

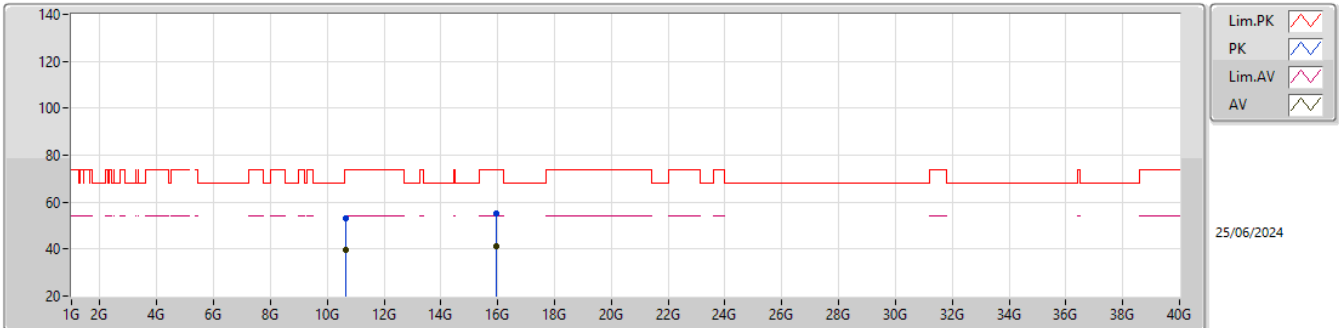


EUT\_Y\_2TX  
Setting 58  
04-D-K-5

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|-----------|----------------|---------------|---------|------------|------------|------------|--|--|--|
| PK   | 10.63904G    | 53.20             | 74.00             | -20.80         | 47.96         | 3           | Vertical  | 161            | 1.43          | -       | 38.90      | 9.04       | 42.70      |  |  |  |
| AV   | 10.64141G    | 39.60             | 54.00             | -14.40         | 34.35         | 3           | Vertical  | 161            | 1.43          | -       | 38.90      | 9.04       | 42.69      |  |  |  |
| PK   | 15.95511G    | 55.34             | 74.00             | -18.66         | 47.74         | 3           | Vertical  | 92             | 1.90          | -       | 38.40      | 11.43      | 42.23      |  |  |  |
| AV   | 15.94533G    | 41.35             | 54.00             | -12.65         | 33.76         | 3           | Vertical  | 92             | 1.90          | -       | 38.38      | 11.42      | 42.21      |  |  |  |

5.25-5.35GHz\_802.11ax HEW20\_Nss1,(MCS0)\_2TX

5320MHz\_TX

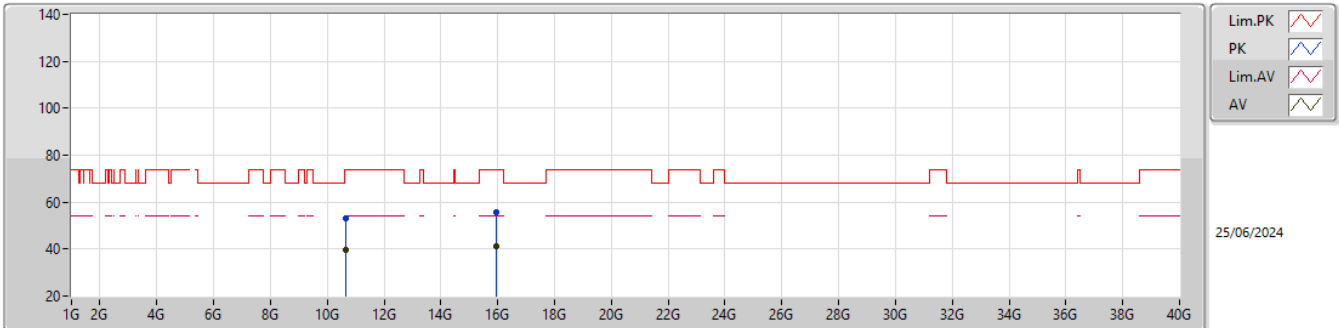


EUT\_Y\_2TX  
Setting 58  
04-D-Y-1

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition  | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|------------|----------------|---------------|---------|------------|------------|------------|--|--|--|
| PK   | 10.63388G    | 53.35             | 74.00             | -20.65         | 48.12         | 3           | Horizontal | 9              | 1.98          | -       | 38.90      | 9.03       | 42.70      |  |  |  |
| AV   | 10.64156G    | 39.61             | 54.00             | -14.39         | 34.36         | 3           | Horizontal | 9              | 1.98          | -       | 38.90      | 9.04       | 42.69      |  |  |  |
| PK   | 15.95709G    | 55.55             | 74.00             | -18.45         | 47.96         | 3           | Horizontal | 40             | 1.20          | -       | 38.40      | 11.43      | 42.24      |  |  |  |
| AV   | 15.94677G    | 41.35             | 54.00             | -12.65         | 33.75         | 3           | Horizontal | 40             | 1.20          | -       | 38.39      | 11.42      | 42.21      |  |  |  |

5.47-5.725GHz\_802.11ax HEW20\_Nss1,(MCS0)\_2TX

5500MHz\_TX

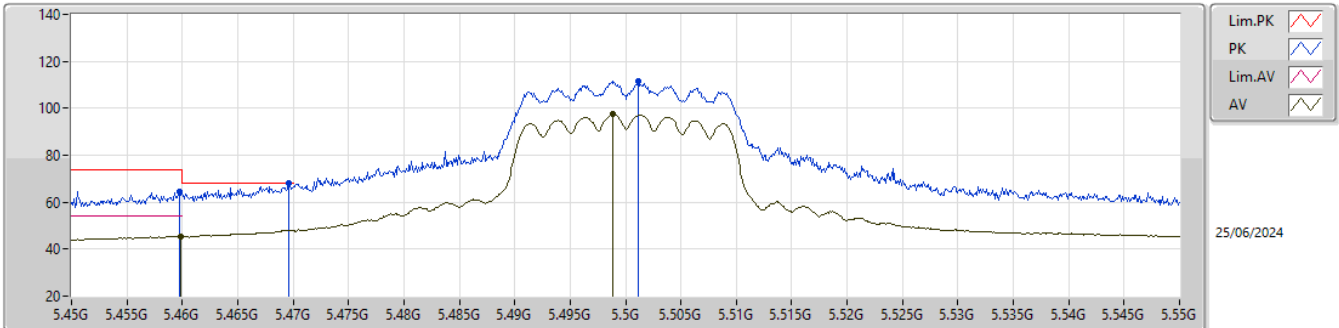


EUT\_Z\_2TX  
Setting 49  
04-D-K-5-10

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|-----------|----------------|---------------|---------|------------|------------|------------|--|--|--|
| PK   | 5.4597G      | 64.30             | 74.00             | -9.70          | 68.15         | 3           | Vertical  | 0              | 1.00          | -       | 33.36      | 6.15       | 43.36      |  |  |  |
| AV   | 5.4599G      | 45.56             | 54.00             | -8.44          | 49.41         | 3           | Vertical  | 0              | 1.00          | -       | 33.36      | 6.15       | 43.36      |  |  |  |
| PK   | 5.4696G      | 67.99             | 68.20             | -0.21          | 71.77         | 3           | Vertical  | 0              | 1.00          | -       | 33.42      | 6.15       | 43.35      |  |  |  |
| PK   | 5.5012G      | 111.34            | Inf               | -Inf           | 114.88        | 3           | Vertical  | 0              | 1.00          | -       | 33.60      | 6.17       | 43.31      |  |  |  |
| AV   | 5.4988G      | 97.33             | Inf               | -Inf           | 100.88        | 3           | Vertical  | 0              | 1.00          | -       | 33.59      | 6.17       | 43.31      |  |  |  |

5.47-5.725GHz\_802.11ax HEW20\_Nss1,(MCS0)\_2TX


5500MHz\_TX

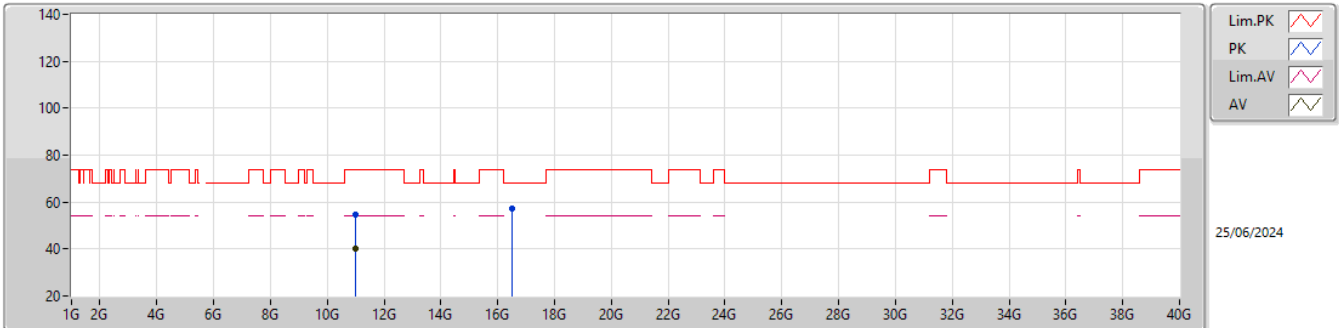EUT\_Y\_2TX  
Setting 49  
04-D-Y-1

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|-----------|----------------|---------------|---------|------------|------------|------------|--|--|--|
| PK   | 10.98887G    | 54.56             | 74.00             | -19.44         | 48.66         | 3           | Vertical  | 274            | 2.39          | -       | 38.92      | 9.21       | 42.23      |  |  |  |
| AV   | 11.01362G    | 40.41             | 54.00             | -13.59         | 34.56         | 3           | Vertical  | 274            | 2.39          | -       | 38.87      | 9.23       | 42.25      |  |  |  |
| PK   | 16.50783G    | 57.30             | 68.20             | -10.90         | 47.40         | 3           | Vertical  | 20             | 2.87          | -       | 39.32      | 11.86      | 41.28      |  |  |  |

5.47-5.725GHz\_802.11ax HEW20\_Nss1,(MCS0)\_2TX


5500MHz\_TX

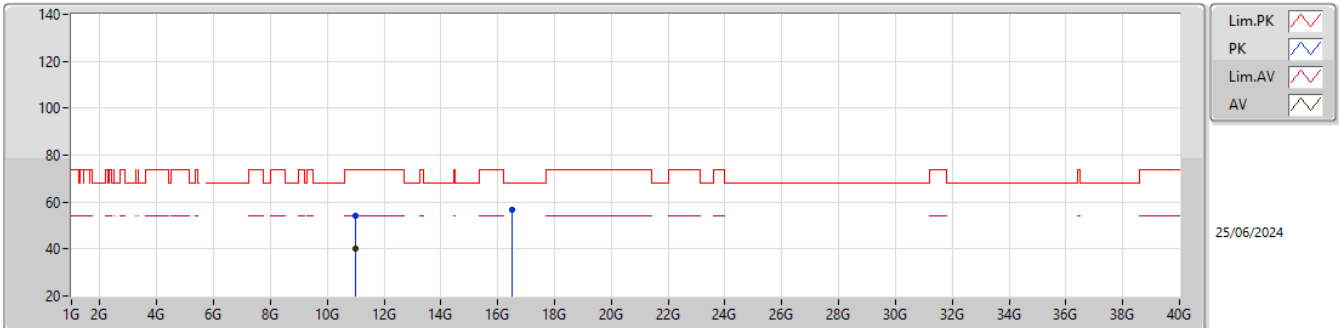EUT\_Y\_2TX  
Setting 49  
04-D-Y-1

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition  | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|------------|----------------|---------------|---------|------------|------------|------------|--|--|--|
| PK   | 11.00537G    | 53.94             | 74.00             | -20.06         | 48.06         | 3           | Horizontal | 57             | 2.11          | -       | 38.89      | 9.22       | 42.23      |  |  |  |
| AV   | 11.00714G    | 40.42             | 54.00             | -13.58         | 34.54         | 3           | Horizontal | 57             | 2.11          | -       | 38.89      | 9.22       | 42.23      |  |  |  |
| PK   | 16.49361G    | 56.49             | 68.20             | -11.71         | 46.62         | 3           | Horizontal | 111            | 2.16          | -       | 39.29      | 11.85      | 41.27      |  |  |  |

5.47-5.725GHz\_802.11ax HEW20\_Nss1,(MCS0)\_2TX

5580MHz\_TX

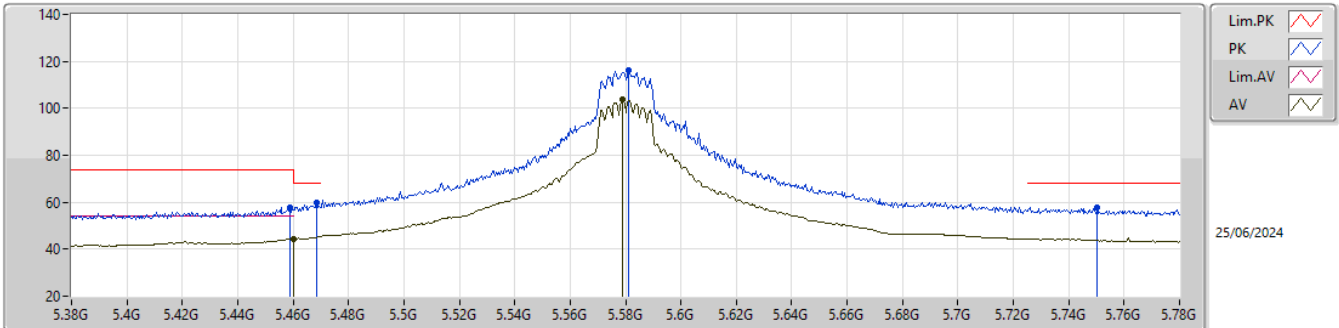


EUT\_Z\_2TX  
Setting 69  
04-D-K-5-10

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|-----------|----------------|---------------|---------|------------|------------|------------|--|--|--|
| PK   | 5.4588G      | 57.91             | 74.00             | -16.09         | 61.77         | 3           | Vertical  | 2              | 2.14          | -       | 33.35      | 6.15       | 43.36      |  |  |  |
| AV   | 5.46G        | 44.36             | 54.00             | -9.64          | 48.21         | 3           | Vertical  | 2              | 2.14          | -       | 33.36      | 6.15       | 43.36      |  |  |  |
| PK   | 5.4684G      | 59.89             | 68.20             | -8.31          | 63.68         | 3           | Vertical  | 2              | 2.14          | -       | 33.41      | 6.15       | 43.35      |  |  |  |
| PK   | 5.5812G      | 115.95            | Inf               | -Inf           | 119.30        | 3           | Vertical  | 2              | 2.14          | -       | 33.70      | 6.21       | 43.26      |  |  |  |
| AV   | 5.5788G      | 103.62            | Inf               | -Inf           | 106.98        | 3           | Vertical  | 2              | 2.14          | -       | 33.70      | 6.21       | 43.27      |  |  |  |
| PK   | 5.7504G      | 57.69             | 68.20             | -10.51         | 60.66         | 3           | Vertical  | 2              | 2.14          | -       | 34.00      | 6.20       | 43.17      |  |  |  |

5.47-5.725GHz\_802.11ax HEW20\_Nss1,(MCS0)\_2TX

5580MHz\_TX

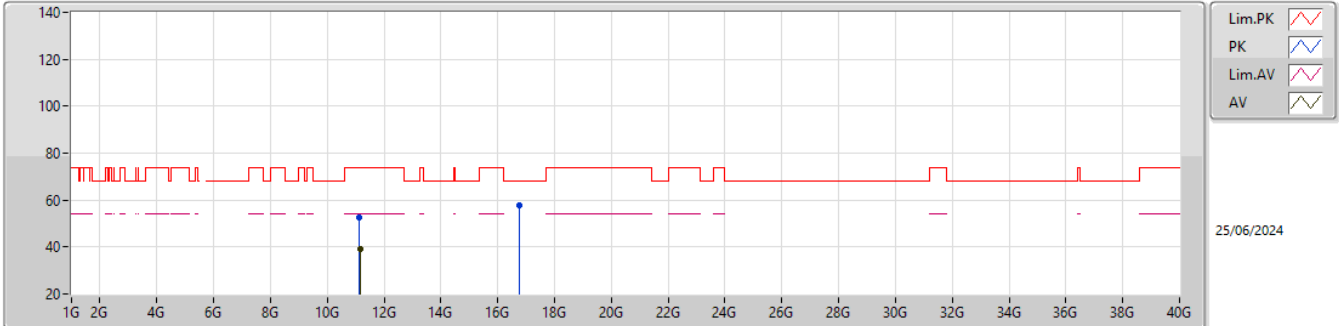


EUT\_Y\_2TX  
Setting 69  
04-D-Y-1

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|-----------|----------------|---------------|---------|------------|------------|------------|--|--|--|
| PK   | 11.14512G    | 52.68             | 74.00             | -21.32         | 47.27         | 3           | Vertical  | 351            | 2.72          | -       | 38.62      | 9.29       | 42.50      |  |  |  |
| AV   | 11.16G       | 39.21             | 54.00             | -14.79         | 33.84         | 3           | Vertical  | 351            | 2.72          | -       | 38.60      | 9.30       | 42.53      |  |  |  |
| PK   | 16.75446G    | 57.57             | 68.20             | -10.63         | 47.47         | 3           | Vertical  | 209            | 1.41          | -       | 39.82      | 12.06      | 41.78      |  |  |  |

5.47-5.725GHz\_802.11ax HEW20\_Nss1,(MCS0)\_2TX


5580MHz\_TX

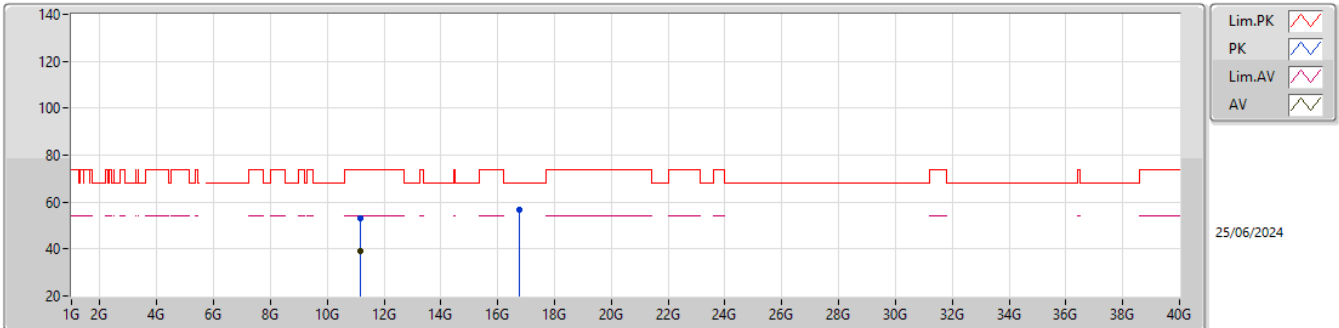EUT\_Y\_2TX  
Setting 69  
04-D-Y-1

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition  | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|------------|----------------|---------------|---------|------------|------------|------------|--|--|--|
| PK   | 11.16429G    | 53.35             | 74.00             | -20.65         | 47.99         | 3           | Horizontal | 332            | 1.27          | -       | 38.60      | 9.30       | 42.54      |  |  |  |
| AV   | 11.14842G    | 39.22             | 54.00             | -14.78         | 33.82         | 3           | Horizontal | 332            | 1.27          | -       | 38.61      | 9.30       | 42.51      |  |  |  |
| PK   | 16.74339G    | 56.89             | 68.20             | -11.31         | 46.83         | 3           | Horizontal | 119            | 1.08          | -       | 39.77      | 12.05      | 41.76      |  |  |  |

5.47-5.725GHz\_802.11ax HEW20\_Nss1,(MCS0)\_2TX

5700MHz\_TX

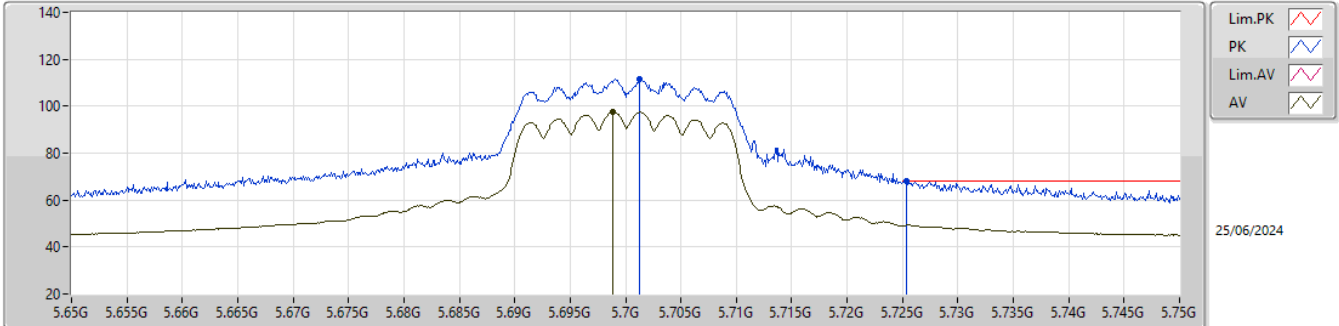


EUT\_Z\_2TX  
Setting 48  
04-D-K-5-10

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|-----------|----------------|---------------|---------|------------|------------|------------|--|--|--|
| PK   | 5.7013G      | 111.54            | Inf               | -Inf           | 114.72        | 3           | Vertical  | 0              | 2.16          | -       | 33.81      | 6.21       | 43.20      |  |  |  |
| AV   | 5.6989G      | 97.66             | Inf               | -Inf           | 100.85        | 3           | Vertical  | 0              | 2.16          | -       | 33.80      | 6.21       | 43.20      |  |  |  |
| PK   | 5.7254G      | 68.14             | 68.20             | -0.06          | 71.21         | 3           | Vertical  | 0              | 2.16          | -       | 33.90      | 6.21       | 43.18      |  |  |  |

5.47-5.725GHz\_802.11ax HEW20\_Nss1,(MCS0)\_2TX


5700MHz\_TX

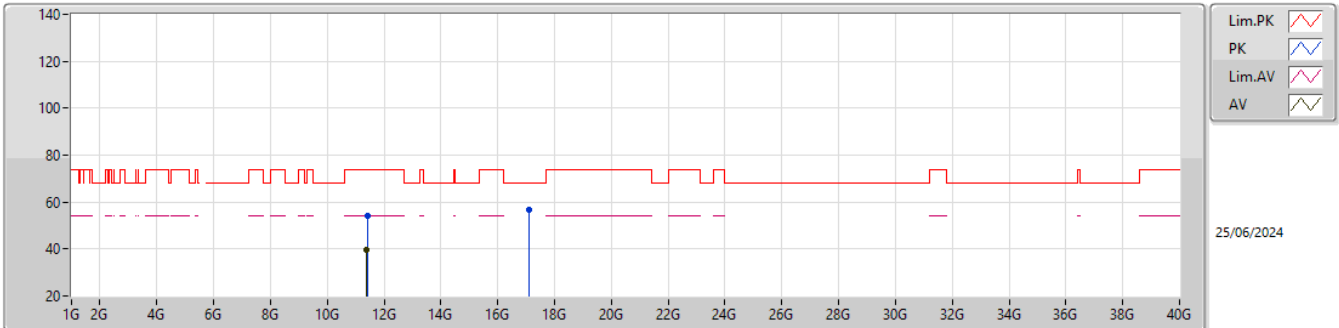EUT\_Y\_2TX  
Setting 48  
04-D-Y-1

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|-----------|----------------|---------------|---------|------------|------------|------------|--|--|--|
| PK   | 11.41014G    | 53.89             | 74.00             | -20.11         | 48.68         | 3           | Vertical  | 126            | 1.73          | -       | 38.80      | 9.43       | 43.02      |  |  |  |
| AV   | 11.39346G    | 39.85             | 54.00             | -14.15         | 34.62         | 3           | Vertical  | 126            | 1.73          | -       | 38.80      | 9.42       | 42.99      |  |  |  |
| PK   | 17.10744G    | 56.50             | 68.20             | -11.70         | 45.43         | 3           | Vertical  | 96             | 2.82          | -       | 41.01      | 12.34      | 42.28      |  |  |  |

5.47-5.725GHz\_802.11ax HEW20\_Nss1,(MCS0)\_2TX


5700MHz\_TX

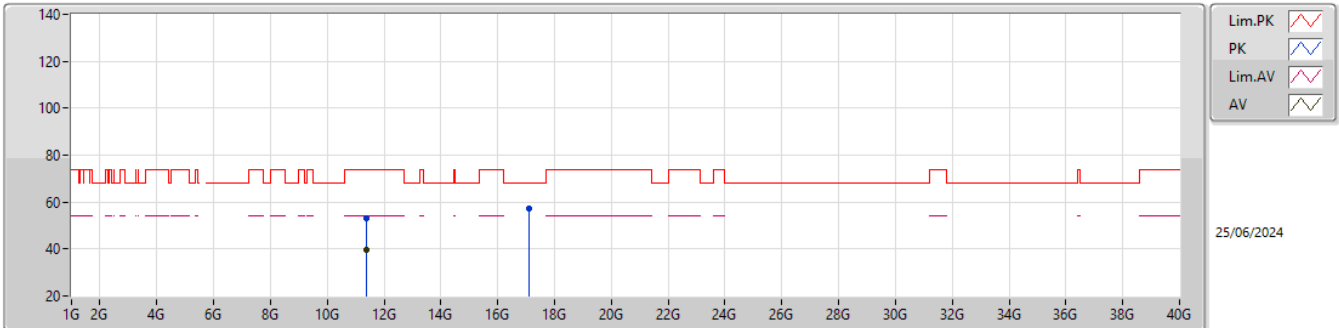EUT\_Y\_2TX  
Setting 48  
04-D-Y-1

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition  | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|------------|----------------|---------------|---------|------------|------------|------------|--|--|--|
| PK   | 11.38953G    | 53.30             | 74.00             | -20.70         | 48.06         | 3           | Horizontal | 75             | 2.24          | -       | 38.80      | 9.42       | 42.98      |  |  |  |
| AV   | 11.39346G    | 39.86             | 54.00             | -14.14         | 34.63         | 3           | Horizontal | 75             | 2.24          | -       | 38.80      | 9.42       | 42.99      |  |  |  |
| PK   | 17.11218G    | 57.19             | 68.20             | -11.01         | 46.10         | 3           | Horizontal | 138            | 1.59          | -       | 41.02      | 12.35      | 42.28      |  |  |  |

5.47-5.725GHz\_802.11ax HEW20\_Nss1,(MCS0)\_2TX

5720MHz Straddle 5.47-5.725GHz\_TX

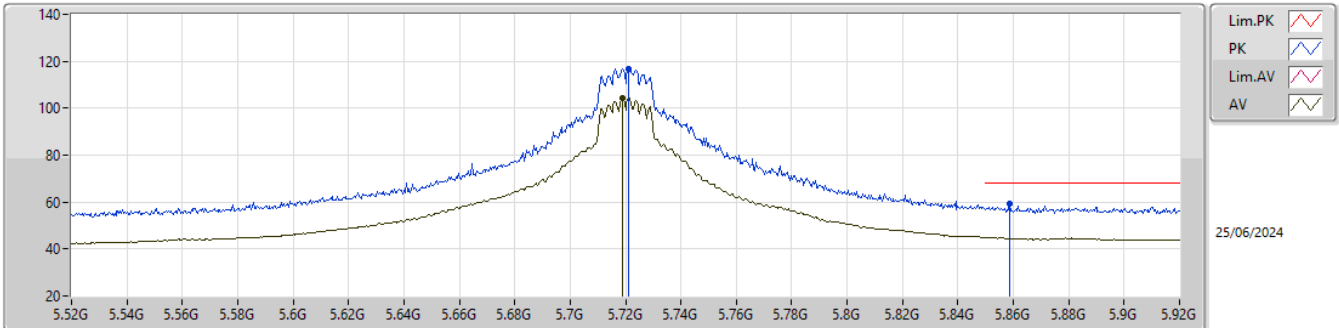


EUT\_Z\_2TX  
Setting 71  
04-D-K-5-10

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|-----------|----------------|---------------|---------|------------|------------|------------|--|--|--|
| PK   | 5.7212G      | 116.80            | Inf               | -Inf           | 119.90        | 3           | Vertical  | 0              | 2.01          | -       | 33.88      | 6.21       | 43.19      |  |  |  |
| AV   | 5.7188G      | 104.29            | Inf               | -Inf           | 107.39        | 3           | Vertical  | 0              | 2.01          | -       | 33.88      | 6.21       | 43.19      |  |  |  |
| PK   | 5.8588G      | 59.35             | 68.20             | -8.85          | 61.76         | 3           | Vertical  | 0              | 2.01          | -       | 34.45      | 6.25       | 43.11      |  |  |  |

5.47-5.725GHz\_802.11ax HEW20\_Nss1,(MCS0)\_2TX


5720MHz Straddle 5.47-5.725GHz\_TX

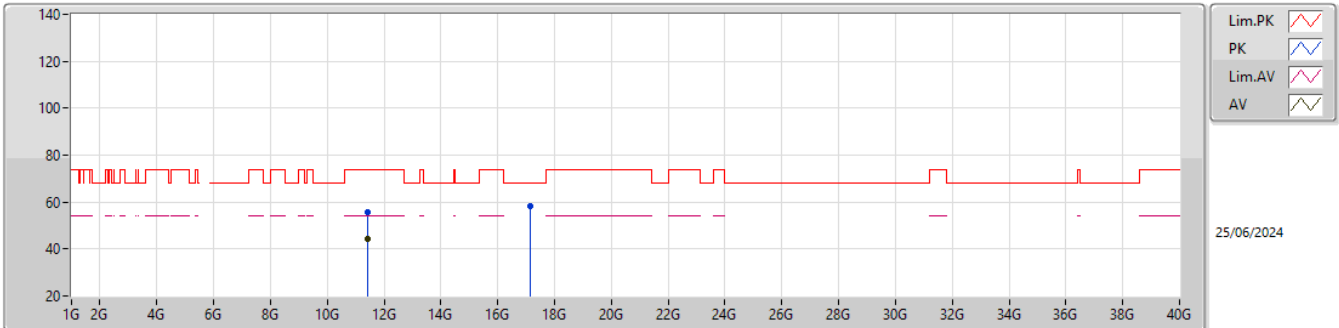EUT\_Y\_2TX  
Setting 71  
04-D-Y-1

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|-----------|----------------|---------------|---------|------------|------------|------------|--|--|--|
| PK   | 11.43811G    | 55.69             | 74.00             | -18.31         | 50.53         | 3           | Vertical  | 145            | 1.73          | -       | 38.80      | 9.44       | 43.08      |  |  |  |
| AV   | 11.43958G    | 44.21             | 54.00             | -9.79          | 39.05         | 3           | Vertical  | 145            | 1.73          | -       | 38.80      | 9.44       | 43.08      |  |  |  |
| PK   | 17.16768G    | 58.44             | 68.20             | -9.76          | 47.19         | 3           | Vertical  | 208            | 2.90          | -       | 41.14      | 12.39      | 42.28      |  |  |  |

5.47-5.725GHz\_802.11ax HEW20\_Nss1,(MCS0)\_2TX


5720MHz Straddle 5.47-5.725GHz\_TX

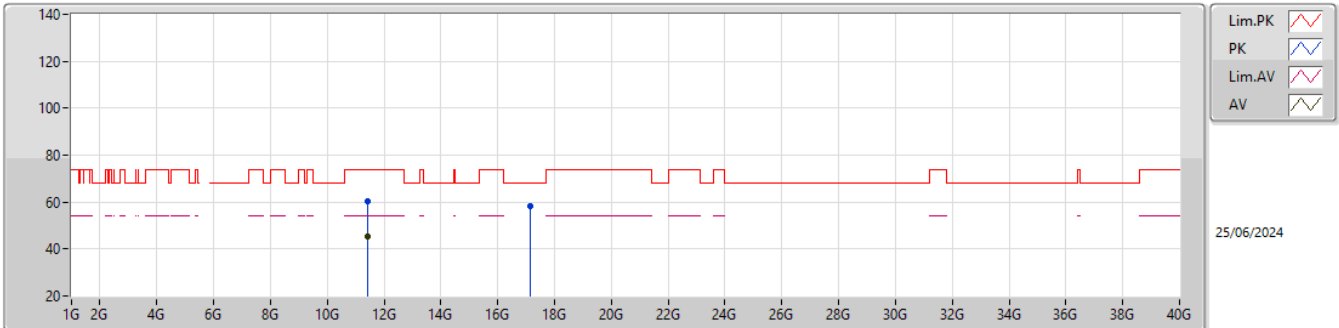EUT\_Y\_2TX  
Setting 71  
04-D-Y-1

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition  | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|------------|----------------|---------------|---------|------------|------------|------------|--|--|--|
| PK   | 11.44018G    | 60.21             | 74.00             | -13.79         | 55.05         | 3           | Horizontal | 115            | 1.80          | -       | 38.80      | 9.44       | 43.08      |  |  |  |
| AV   | 11.43247G    | 45.52             | 54.00             | -8.48          | 40.35         | 3           | Horizontal | 115            | 1.80          | -       | 38.80      | 9.44       | 43.07      |  |  |  |
| PK   | 17.15148G    | 58.37             | 68.20             | -9.83          | 47.17         | 3           | Horizontal | 122            | 2.43          | -       | 41.10      | 12.38      | 42.28      |  |  |  |

5.725-5.85GHz\_802.11ax HEW20\_Nss1,(MCS0)\_2TX

5745MHz\_TX

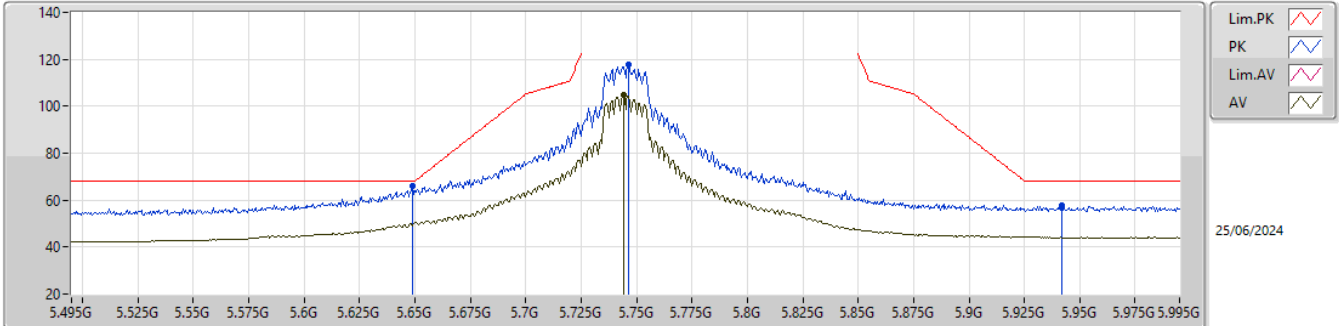


EUT\_Z\_2TX  
Setting 71  
04-D-K-5-10

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|-----------|----------------|---------------|---------|------------|------------|------------|--|--|--|
| PK   | 5.649G       | 65.87             | 68.20             | -2.33          | 69.18         | 3           | Vertical  | 1              | 2.25          | -       | 33.70      | 6.22       | 43.23      |  |  |  |
| PK   | 5.7465G      | 117.82            | Inf               | -Inf           | 120.79        | 3           | Vertical  | 1              | 2.25          | -       | 33.99      | 6.21       | 43.17      |  |  |  |
| AV   | 5.744G       | 104.61            | Inf               | -Inf           | 107.59        | 3           | Vertical  | 1              | 2.25          | -       | 33.98      | 6.21       | 43.17      |  |  |  |
| PK   | 5.942G       | 57.57             | 68.20             | -10.63         | 59.35         | 3           | Vertical  | 1              | 2.25          | -       | 34.95      | 6.33       | 43.06      |  |  |  |

5.725-5.85GHz\_802.11ax HEW20\_Nss1,(MCS0)\_2TX


5745MHz\_TX

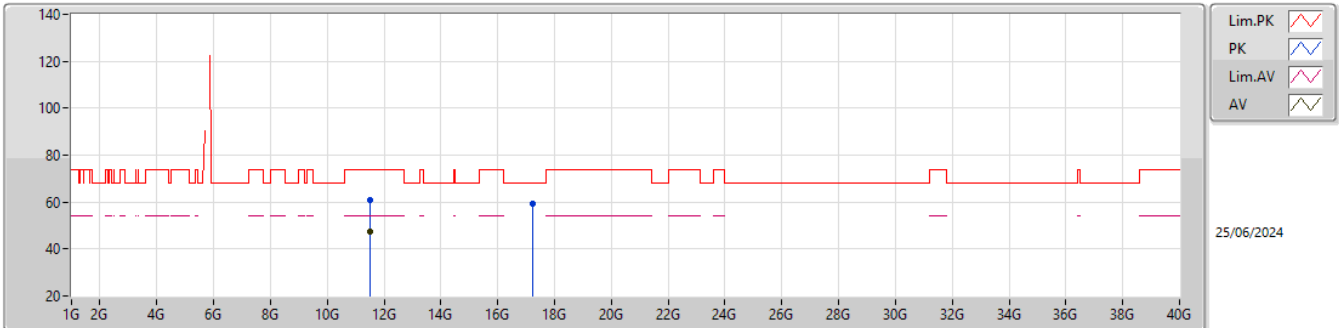EUT\_Y\_2TX  
Setting 71  
04-D-Y-1

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|-----------|----------------|---------------|---------|------------|------------|------------|--|--|--|
| PK   | 11.48694G    | 60.85             | 74.00             | -13.15         | 55.75         | 3           | Vertical  | 156            | 2.87          | -       | 38.80      | 9.47       | 43.17      |  |  |  |
| AV   | 11.48967G    | 47.26             | 54.00             | -6.74          | 42.17         | 3           | Vertical  | 156            | 2.87          | -       | 38.80      | 9.47       | 43.18      |  |  |  |
| PK   | 17.23056G    | 59.20             | 68.20             | -9.00          | 47.77         | 3           | Vertical  | 44             | 1.28          | -       | 41.26      | 12.44      | 42.27      |  |  |  |

5.725-5.85GHz\_802.11ax HEW20\_Nss1,(MCS0)\_2TX


5745MHz\_TX

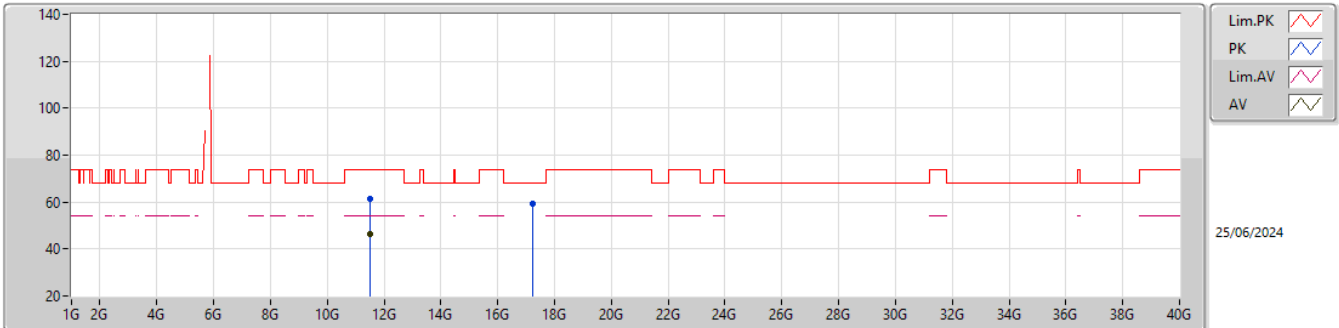EUT\_Y\_2TX  
Setting 71  
04-D-Y-1

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition  | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|------------|----------------|---------------|---------|------------|------------|------------|--|--|--|
| PK   | 11.48916G    | 61.47             | 74.00             | -12.53         | 56.38         | 3           | Horizontal | 122            | 1.85          | -       | 38.80      | 9.47       | 43.18      |  |  |  |
| AV   | 11.49216G    | 46.53             | 54.00             | -7.47          | 41.44         | 3           | Horizontal | 122            | 1.85          | -       | 38.80      | 9.47       | 43.18      |  |  |  |
| PK   | 17.23296G    | 59.06             | 68.20             | -9.14          | 47.62         | 3           | Horizontal | 213            | 1.02          | -       | 41.27      | 12.44      | 42.27      |  |  |  |

5.725-5.85GHz\_802.11ax HEW20\_Nss1,(MCS0)\_2TX

5785MHz\_TX

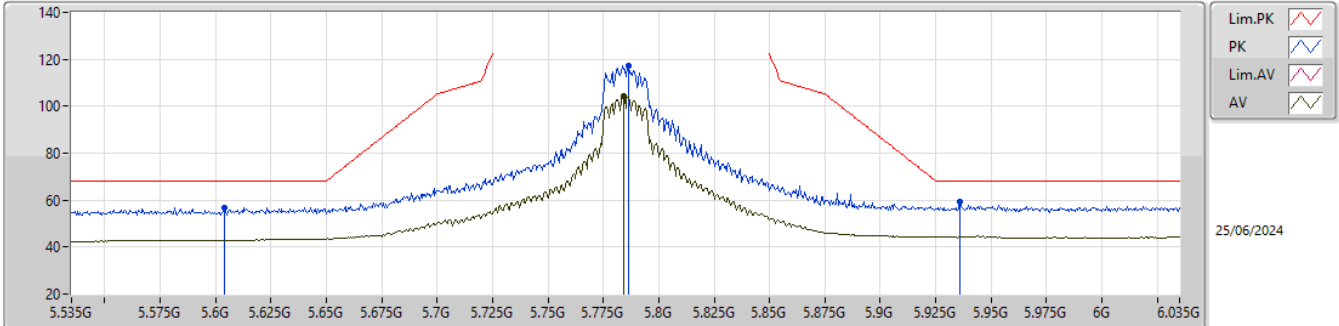


EUT\_Z\_2TX  
Setting 71  
04-D-K-5-10

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|-----------|----------------|---------------|---------|------------|------------|------------|--|--|--|
| PK   | 5.604G       | 56.69             | 68.20             | -11.51         | 60.02         | 3           | Vertical  | 360            | 2.45          | -       | 33.70      | 6.22       | 43.25      |  |  |  |
| PK   | 5.7865G      | 117.50            | Inf               | -Inf           | 120.30        | 3           | Vertical  | 360            | 2.45          | -       | 34.15      | 6.20       | 43.15      |  |  |  |
| AV   | 5.784G       | 104.31            | Inf               | -Inf           | 107.12        | 3           | Vertical  | 360            | 2.45          | -       | 34.14      | 6.20       | 43.15      |  |  |  |
| PK   | 5.936G       | 59.13             | 68.20             | -9.07          | 60.96         | 3           | Vertical  | 360            | 2.45          | -       | 34.92      | 6.32       | 43.07      |  |  |  |

5.725-5.85GHz\_802.11ax HEW20\_Nss1,(MCS0)\_2TX


5785MHz\_TX

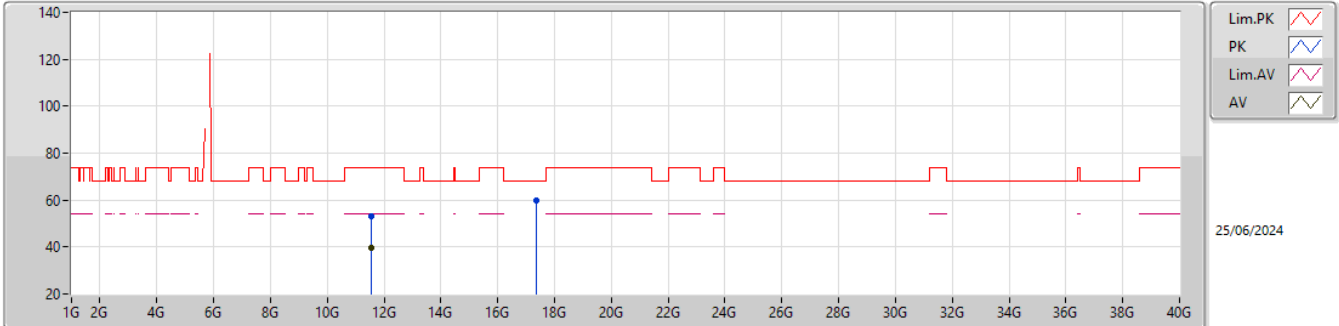EUT\_Y\_2TX  
Setting 71  
04-D-Y-1

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|-----------|----------------|---------------|---------|------------|------------|------------|--|--|--|
| PK   | 11.57036G    | 53.26             | 74.00             | -20.74         | 48.11         | 3           | Vertical  | 64             | 2.66          | -       | 38.80      | 9.51       | 43.16      |  |  |  |
| AV   | 11.57066G    | 39.64             | 54.00             | -14.36         | 34.49         | 3           | Vertical  | 64             | 2.66          | -       | 38.80      | 9.51       | 43.16      |  |  |  |
| PK   | 17.35647G    | 59.71             | 68.20             | -8.49          | 47.70         | 3           | Vertical  | 146            | 1.32          | -       | 41.73      | 12.54      | 42.26      |  |  |  |

5.725-5.85GHz\_802.11ax HEW20\_Nss1,(MCS0)\_2TX


5785MHz\_TX

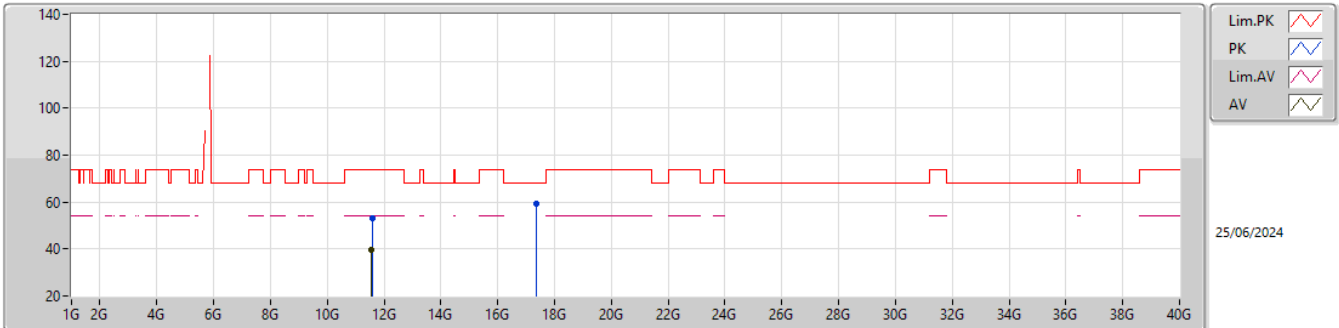EUT\_Y\_2TX  
Setting 71  
04-D-Y-1

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition  | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|------------|----------------|---------------|---------|------------|------------|------------|--|--|--|
| PK   | 11.57984G    | 53.25             | 74.00             | -20.75         | 48.08         | 3           | Horizontal | 353            | 1.21          | -       | 38.80      | 9.52       | 43.15      |  |  |  |
| AV   | 11.56796G    | 39.65             | 54.00             | -14.35         | 34.50         | 3           | Horizontal | 353            | 1.21          | -       | 38.80      | 9.51       | 43.16      |  |  |  |
| PK   | 17.34564G    | 59.42             | 68.20             | -8.78          | 47.46         | 3           | Horizontal | 333            | 2.27          | -       | 41.69      | 12.53      | 42.26      |  |  |  |

5.725-5.85GHz\_802.11ax HEW20\_Nss1,(MCS0)\_2TX

5825MHz\_TX

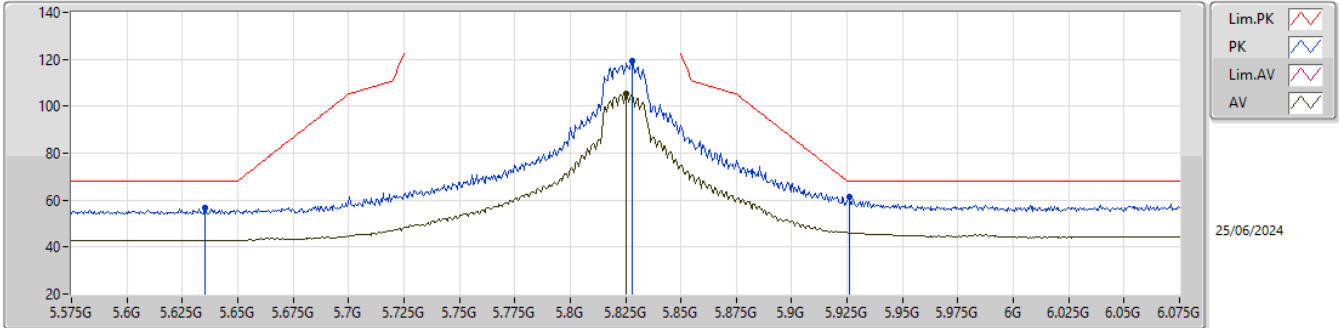


EUT\_Z\_2TX  
Setting 71  
04-D-K-5-10

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|-----------|----------------|---------------|---------|------------|------------|------------|--|--|--|
| PK   | 5.635G       | 56.64             | 68.20             | -11.56         | 59.95         | 3           | Vertical  | 40             | 3.00          | -       | 33.70      | 6.22       | 43.23      |  |  |  |
| PK   | 5.828G       | 119.52            | Inf               | -Inf           | 122.11        | 3           | Vertical  | 40             | 3.00          | -       | 34.31      | 6.23       | 43.13      |  |  |  |
| AV   | 5.8255G      | 105.41            | Inf               | -Inf           | 108.02        | 3           | Vertical  | 40             | 3.00          | -       | 34.30      | 6.22       | 43.13      |  |  |  |
| PK   | 5.926G       | 61.32             | 68.20             | -6.88          | 63.22         | 3           | Vertical  | 40             | 3.00          | -       | 34.86      | 6.31       | 43.07      |  |  |  |

5.725-5.85GHz\_802.11ax HEW20\_Nss1,(MCS0)\_2TX


5825MHz\_TX

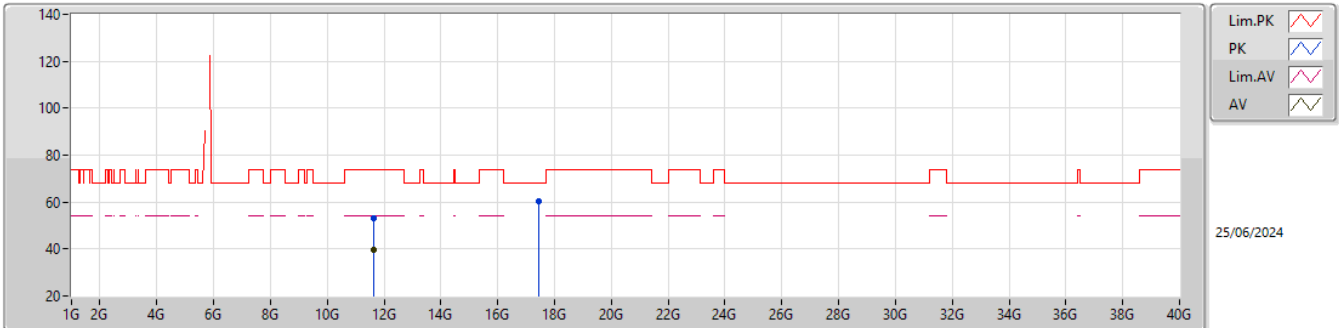EUT\_Y\_2TX  
Setting 71  
04-D-Y-1

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|-----------|----------------|---------------|---------|------------|------------|------------|--|--|--|
| PK   | 11.63677G    | 53.05             | 74.00             | -20.95         | 47.83         | 3           | Vertical  | 80             | 2.94          | -       | 38.80      | 9.54       | 43.12      |  |  |  |
| AV   | 11.6398G     | 39.45             | 54.00             | -14.55         | 34.21         | 3           | Vertical  | 80             | 2.94          | -       | 38.80      | 9.55       | 43.11      |  |  |  |
| PK   | 17.46312G    | 60.33             | 68.20             | -7.87          | 47.98         | 3           | Vertical  | 356            | 2.58          | -       | 41.97      | 12.63      | 42.25      |  |  |  |

5.725-5.85GHz\_802.11ax HEW20\_Nss1,(MCS0)\_2TX


5825MHz\_TX

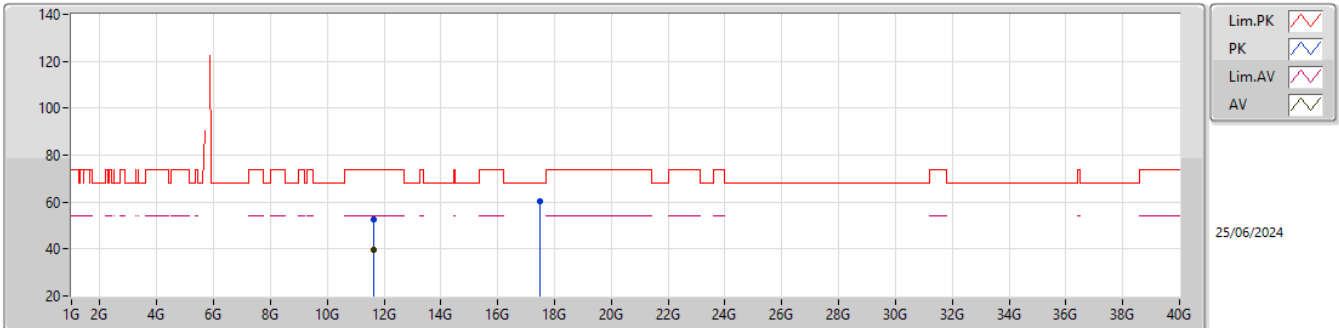EUT\_Y\_2TX  
Setting 71  
04-D-Y-1

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition  | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|------------|----------------|---------------|---------|------------|------------|------------|--|--|--|
| PK   | 11.63956G    | 52.68             | 74.00             | -21.32         | 47.44         | 3           | Horizontal | 282            | 1.13          | -       | 38.80      | 9.55       | 43.11      |  |  |  |
| AV   | 11.63752G    | 39.43             | 54.00             | -14.57         | 34.19         | 3           | Horizontal | 282            | 1.13          | -       | 38.80      | 9.55       | 43.11      |  |  |  |
| PK   | 17.48418G    | 60.50             | 68.20             | -7.70          | 48.18         | 3           | Horizontal | 203            | 2.98          | -       | 41.93      | 12.64      | 42.25      |  |  |  |

## 5.15-5.25GHz\_802.11ax\_HEW40\_Nss1,(MCS0)\_2TX

## 5190MHz\_TX

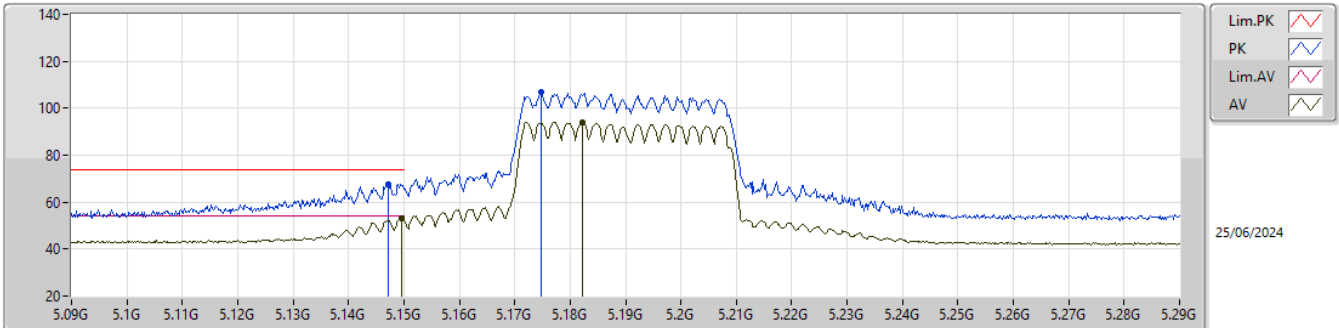


EUT\_Z\_2TX  
Setting 44  
04-D-K-5-10

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|-----------|----------------|---------------|---------|------------|------------|------------|--|--|--|
| PK   | 5.1472G      | 67.79             | 74.00             | -6.21          | 73.02         | 3           | Vertical  | 96             | 1.59          | -       | 32.59      | 5.90       | 43.72      |  |  |  |
| AV   | 5.1496G      | 53.01             | 54.00             | -0.99          | 58.23         | 3           | Vertical  | 96             | 1.59          | -       | 32.60      | 5.90       | 43.72      |  |  |  |
| PK   | 5.1748G      | 106.87            | Inf               | -Inf           | 112.00        | 3           | Vertical  | 96             | 1.59          | -       | 32.65      | 5.91       | 43.69      |  |  |  |
| AV   | 5.1822G      | 93.82             | Inf               | -Inf           | 98.93         | 3           | Vertical  | 96             | 1.59          | -       | 32.66      | 5.91       | 43.68      |  |  |  |

## 5.15-5.25GHz\_802.11ax HEW40\_Nss1,(MCS0)\_2TX

## 5190MHz\_TX

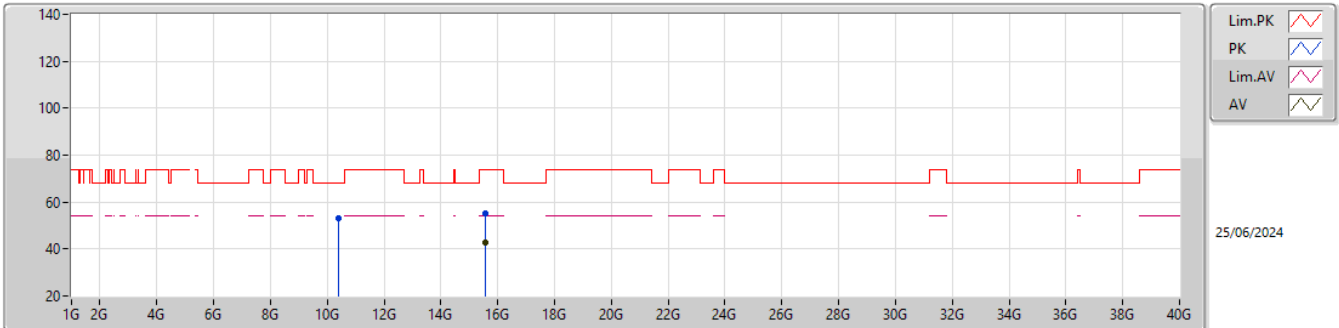


EUT\_Y\_2TX  
Setting 44  
04-D-Y-1

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|-----------|----------------|---------------|---------|------------|------------|------------|--|--|--|
| PK   | 10.38315G    | 53.07             | 68.20             | -15.13         | 48.39         | 3           | Vertical  | 22             | 1.76          | -       | 38.60      | 8.91       | 42.83      |  |  |  |
| PK   | 15.58428G    | 55.18             | 74.00             | -18.82         | 47.06         | 3           | Vertical  | 212            | 1.68          | -       | 38.37      | 11.25      | 41.50      |  |  |  |
| AV   | 15.58464G    | 43.00             | 54.00             | -11.00         | 34.88         | 3           | Vertical  | 212            | 1.68          | -       | 38.37      | 11.25      | 41.50      |  |  |  |

## 5.15-5.25GHz\_802.11ax HEW40\_Nss1,(MCS0)\_2TX

### 5190MHz\_TX

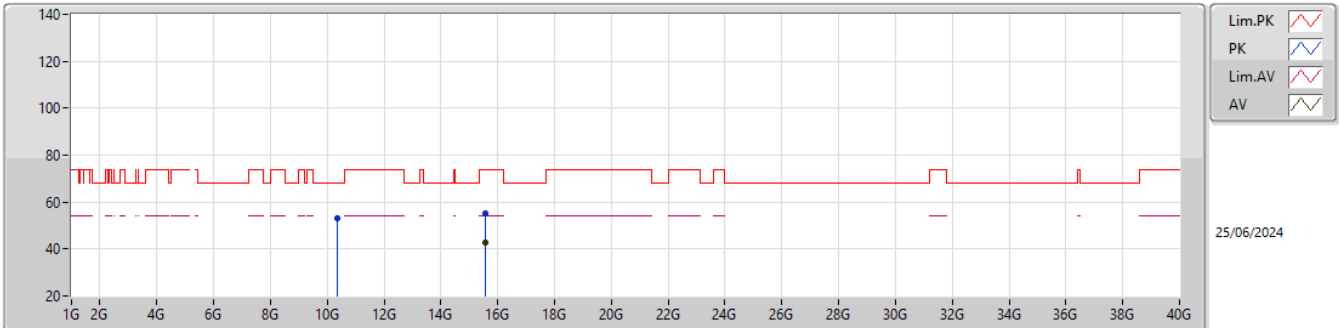


EUT\_Y\_2TX  
Setting 44  
04-D-Y-1

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition  | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|------------|----------------|---------------|---------|------------|------------|------------|--|--|--|
| PK   | 10.36617G    | 53.00             | 68.20             | -15.20         | 48.32         | 3           | Horizontal | 160            | 1.13          | -       | 38.60      | 8.90       | 42.82      |  |  |  |
| PK   | 15.58338G    | 55.43             | 74.00             | -18.57         | 47.31         | 3           | Horizontal | 66             | 1.66          | -       | 38.37      | 11.25      | 41.50      |  |  |  |
| AV   | 15.58335G    | 42.93             | 54.00             | -11.07         | 34.81         | 3           | Horizontal | 66             | 1.66          | -       | 38.37      | 11.25      | 41.50      |  |  |  |

## 5.15-5.25GHz\_802.11ax HEW40\_Nss1,(MCS0)\_2TX

## 5230MHz\_TX

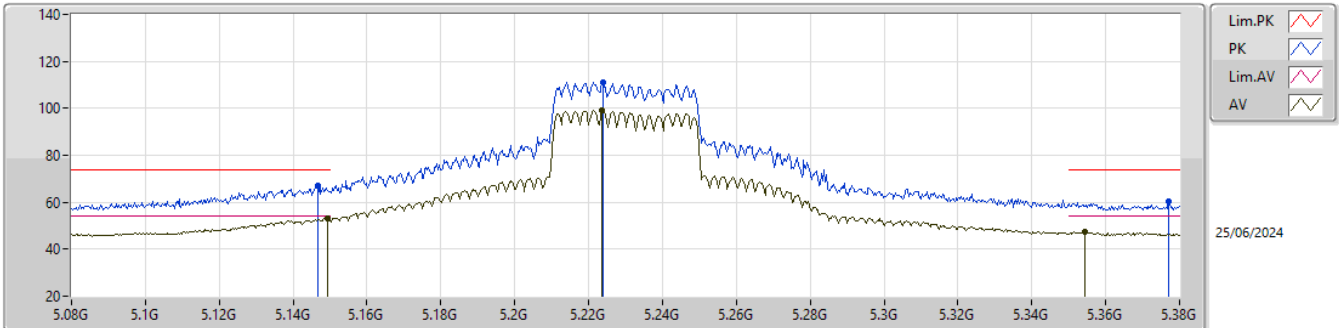


EUT\_Z\_2TX  
Setting 62  
04-D-K-5-10

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|-----------|----------------|---------------|---------|------------|------------|------------|--|--|--|
| PK   | 5.1466G      | 66.84             | 74.00             | -7.16          | 72.07         | 3           | Vertical  | 348            | 2.23          | -       | 32.59      | 5.90       | 43.72      |  |  |  |
| AV   | 5.1493G      | 53.05             | 54.00             | -0.95          | 58.27         | 3           | Vertical  | 348            | 2.23          | -       | 32.60      | 5.90       | 43.72      |  |  |  |
| PK   | 5.224G       | 111.09            | Inf               | -Inf           | 116.08        | 3           | Vertical  | 348            | 2.23          | -       | 32.70      | 5.94       | 43.63      |  |  |  |
| AV   | 5.2237G      | 99.02             | Inf               | -Inf           | 104.01        | 3           | Vertical  | 348            | 2.23          | -       | 32.70      | 5.94       | 43.63      |  |  |  |
| PK   | 5.377G       | 60.10             | 74.00             | -13.90         | 64.44         | 3           | Vertical  | 348            | 2.23          | -       | 33.01      | 6.10       | 43.45      |  |  |  |
| AV   | 5.3545G      | 47.32             | 54.00             | -6.68          | 51.81         | 3           | Vertical  | 348            | 2.23          | -       | 32.92      | 6.07       | 43.48      |  |  |  |

## 5.15-5.25GHz\_802.11ax HEW40\_Nss1,(MCS0)\_2TX

## 5230MHz\_TX

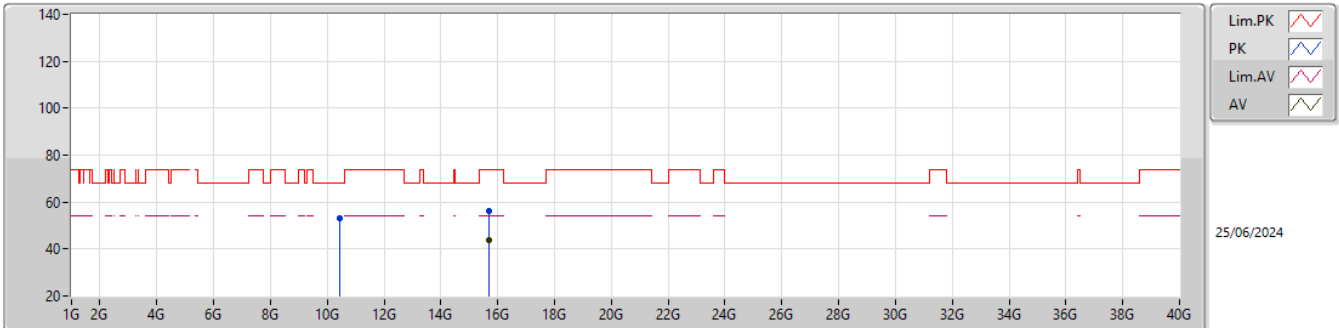


EUT\_Y\_2TX  
Setting 62  
04-D-Y-1

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|-----------|----------------|---------------|---------|------------|------------|------------|--|--|--|
| PK   | 10.45172G    | 53.31             | 68.20             | -14.89         | 48.63         | 3           | Vertical  | 193            | 2.16          | -       | 38.60      | 8.94       | 42.86      |  |  |  |
| PK   | 15.68487G    | 56.14             | 74.00             | -17.86         | 48.68         | 3           | Vertical  | 103            | 2.19          | -       | 37.86      | 11.30      | 41.70      |  |  |  |
| AV   | 15.67884G    | 43.61             | 54.00             | -10.39         | 36.11         | 3           | Vertical  | 103            | 2.19          | -       | 37.88      | 11.30      | 41.68      |  |  |  |

## 5.15-5.25GHz\_802.11ax HEW40\_Nss1,(MCS0)\_2TX

## 5230MHz\_TX

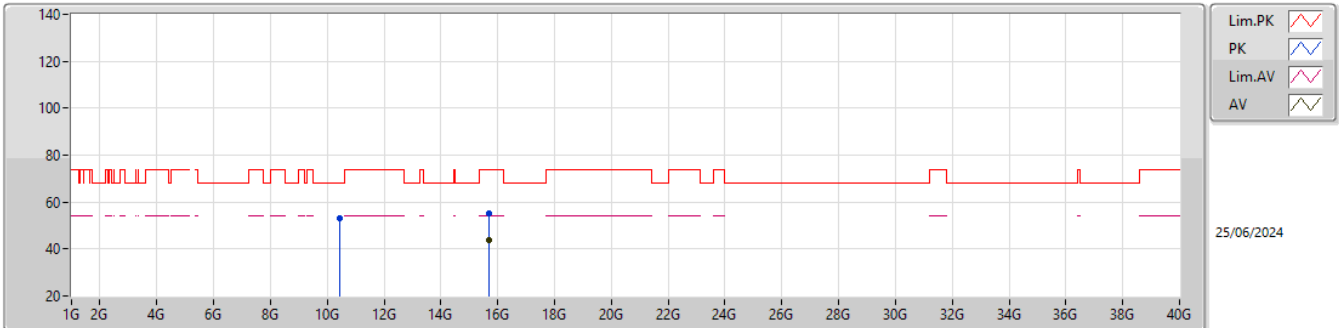


EUT\_Y\_2TX  
Setting 62  
04-D-Y-1

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition  | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|------------|----------------|---------------|---------|------------|------------|------------|--|--|--|
| PK   | 10.44866G    | 52.96             | 68.20             | -15.24         | 48.28         | 3           | Horizontal | 135            | 2.99          | -       | 38.60      | 8.94       | 42.86      |  |  |  |
| PK   | 15.68736G    | 55.28             | 74.00             | -18.72         | 47.83         | 3           | Horizontal | 241            | 2.82          | -       | 37.85      | 11.30      | 41.70      |  |  |  |
| AV   | 15.68508G    | 43.61             | 54.00             | -10.39         | 36.15         | 3           | Horizontal | 241            | 2.82          | -       | 37.86      | 11.30      | 41.70      |  |  |  |

## 5.25-5.35GHz\_802.11ax HEW40\_Nss1,(MCS0)\_2TX

## 5270MHz\_TX

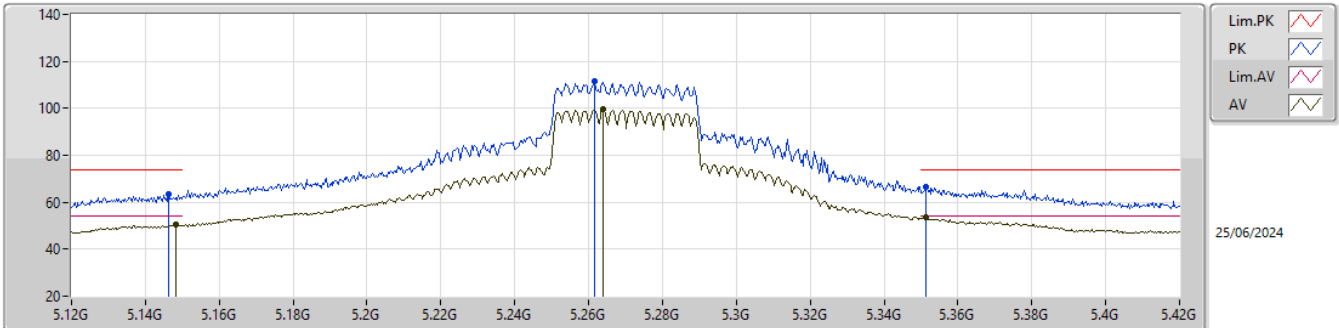


EUT\_Z\_2TX  
Setting 67  
04-D-K-5-10

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|-----------|----------------|---------------|---------|------------|------------|------------|--|--|--|
| PK   | 5.1464G      | 63.35             | 74.00             | -10.65         | 68.58         | 3           | Vertical  | 343            | 2.22          | -       | 32.59      | 5.90       | 43.72      |  |  |  |
| AV   | 5.1482G      | 50.46             | 54.00             | -3.54          | 55.68         | 3           | Vertical  | 343            | 2.22          | -       | 32.60      | 5.90       | 43.72      |  |  |  |
| PK   | 5.2616G      | 111.75            | Inf               | -Inf           | 116.64        | 3           | Vertical  | 343            | 2.22          | -       | 32.72      | 5.98       | 43.59      |  |  |  |
| AV   | 5.264G       | 99.44             | Inf               | -Inf           | 104.31        | 3           | Vertical  | 343            | 2.22          | -       | 32.73      | 5.98       | 43.58      |  |  |  |
| PK   | 5.3513G      | 66.56             | 74.00             | -7.44          | 71.06         | 3           | Vertical  | 343            | 2.22          | -       | 32.91      | 6.07       | 43.48      |  |  |  |
| AV   | 5.3513G      | 53.40             | 54.00             | -0.60          | 57.90         | 3           | Vertical  | 343            | 2.22          | -       | 32.91      | 6.07       | 43.48      |  |  |  |

5.25-5.35GHz\_802.11ax HEW40\_Nss1,(MCS0)\_2TX


5270MHz\_TX

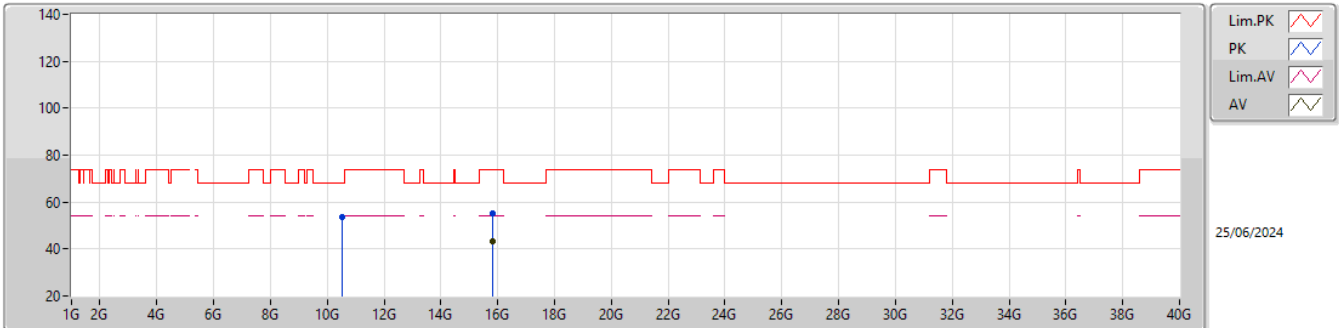EUT\_Y\_2TX  
Setting 67  
04-D-Y-1

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|-----------|----------------|---------------|---------|------------|------------|------------|--|--|--|
| PK   | 10.53055G    | 53.38             | 68.20             | -14.82         | 48.48         | 3           | Vertical  | 141            | 2.55          | -       | 38.76      | 8.98       | 42.84      |  |  |  |
| PK   | 15.82254G    | 55.31             | 74.00             | -18.69         | 47.76         | 3           | Vertical  | 257            | 2.37          | -       | 38.15      | 11.37      | 41.97      |  |  |  |
| AV   | 15.82353G    | 43.29             | 54.00             | -10.71         | 35.74         | 3           | Vertical  | 257            | 2.37          | -       | 38.15      | 11.37      | 41.97      |  |  |  |

5.25-5.35GHz\_802.11ax HEW40\_Nss1,(MCS0)\_2TX

5270MHz\_TX

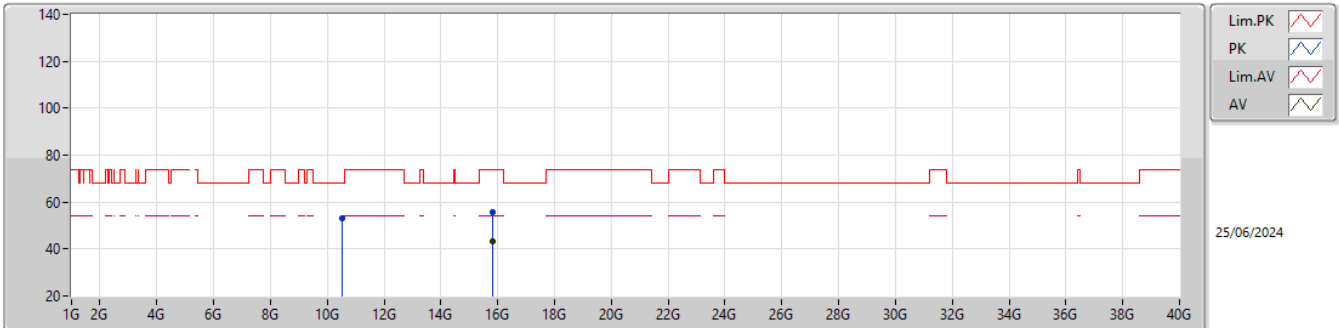


EUT\_Y\_2TX  
Setting 67  
04-D-Y-1

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition  | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|------------|----------------|---------------|---------|------------|------------|------------|--|--|--|
| PK   | 10.53565G    | 53.13             | 68.20             | -15.07         | 48.21         | 3           | Horizontal | 59             | 2.33          | -       | 38.77      | 8.98       | 42.83      |  |  |  |
| PK   | 15.80991G    | 55.52             | 74.00             | -18.48         | 47.92         | 3           | Horizontal | 218            | 1.66          | -       | 38.18      | 11.36      | 41.94      |  |  |  |
| AV   | 15.8127G     | 43.40             | 54.00             | -10.60         | 35.82         | 3           | Horizontal | 218            | 1.66          | -       | 38.17      | 11.36      | 41.95      |  |  |  |

## 5.25-5.35GHz\_802.11ax\_HEW40\_Nss1,(MCS0)\_2TX

## 5310MHz\_TX

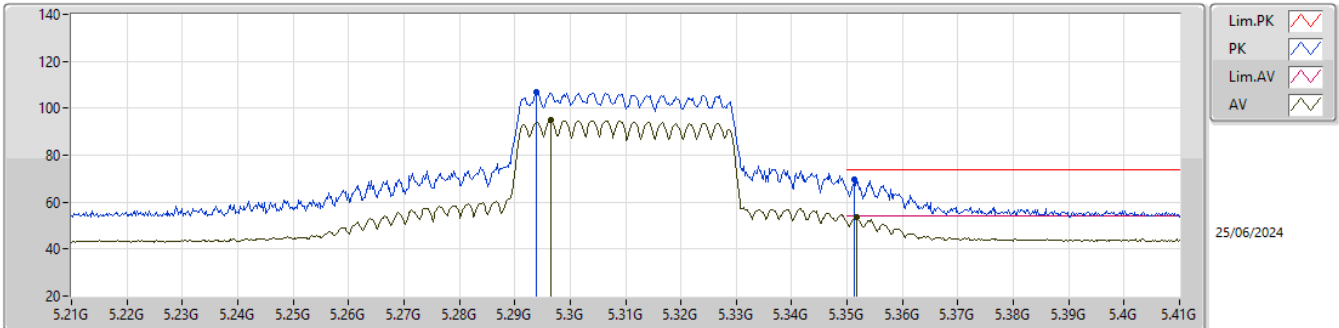


EUT\_Z\_2TX  
Setting 48  
04-D-K-5-10

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|-----------|----------------|---------------|---------|------------|------------|------------|--|--|--|
| PK   | 5.294G       | 107.08            | Inf               | -Inf           | 111.83        | 3           | Vertical  | 344            | 2.06          | -       | 32.79      | 6.01       | 43.55      |  |  |  |
| AV   | 5.2966G      | 94.77             | Inf               | -Inf           | 99.51         | 3           | Vertical  | 344            | 2.06          | -       | 32.79      | 6.02       | 43.55      |  |  |  |
| PK   | 5.3514G      | 69.41             | 74.00             | -4.59          | 73.91         | 3           | Vertical  | 344            | 2.06          | -       | 32.91      | 6.07       | 43.48      |  |  |  |
| AV   | 5.3518G      | 53.47             | 54.00             | -0.53          | 57.97         | 3           | Vertical  | 344            | 2.06          | -       | 32.91      | 6.07       | 43.48      |  |  |  |

5.25-5.35GHz\_802.11ax HEW40\_Nss1,(MCS0)\_2TX

5310MHz\_TX

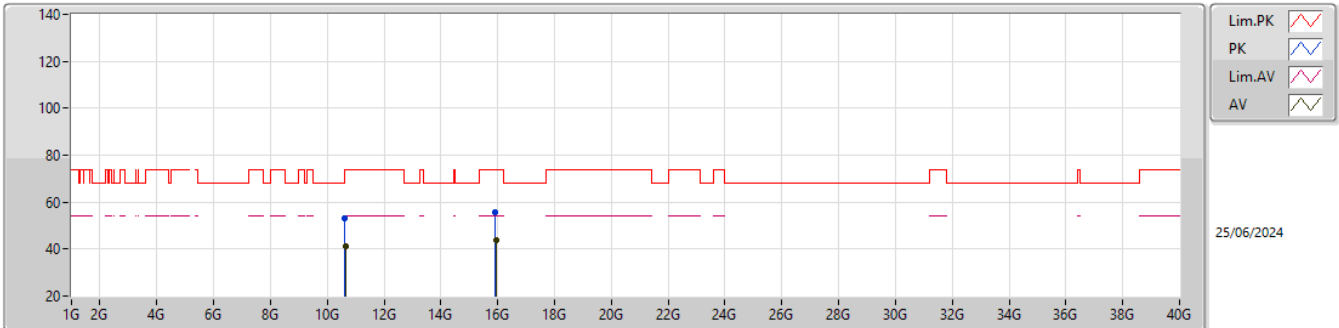


EUT\_Y\_2TX  
Setting 48  
04-D-Y-1

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|-----------|----------------|---------------|---------|------------|------------|------------|--|--|--|
| PK   | 10.61568G    | 53.14             | 74.00             | -20.86         | 47.95         | 3           | Vertical  | 180            | 2.18          | -       | 38.90      | 9.02       | 42.73      |  |  |  |
| AV   | 10.63377G    | 41.31             | 54.00             | -12.69         | 36.08         | 3           | Vertical  | 180            | 2.18          | -       | 38.90      | 9.03       | 42.70      |  |  |  |
| PK   | 15.91722G    | 55.66             | 74.00             | -18.34         | 48.14         | 3           | Vertical  | 343            | 2.79          | -       | 38.27      | 11.41      | 42.16      |  |  |  |
| AV   | 15.93258G    | 43.56             | 54.00             | -10.44         | 36.00         | 3           | Vertical  | 343            | 2.79          | -       | 38.33      | 11.42      | 42.19      |  |  |  |

5.25-5.35GHz\_802.11ax HEW40\_Nss1,(MCS0)\_2TX

5310MHz\_TX

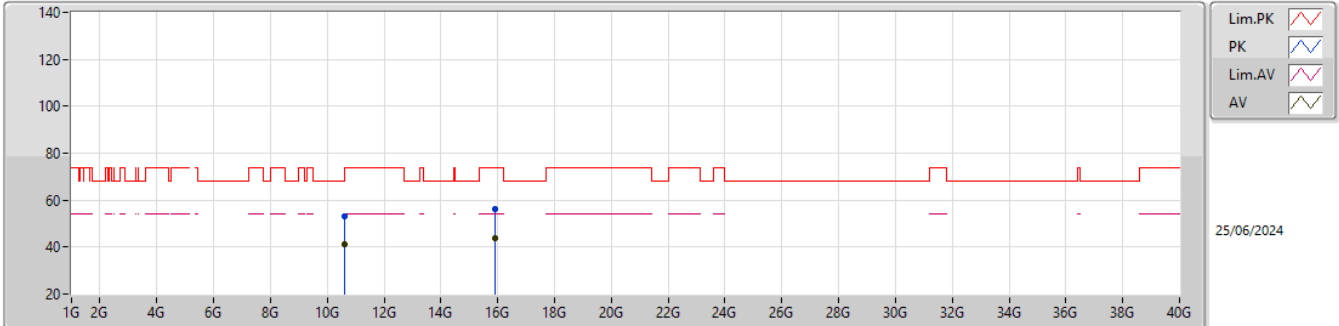


EUT\_Y\_2TX  
Setting 48  
04-D-Y-1

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition  | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|------------|----------------|---------------|---------|------------|------------|------------|--|--|--|
| PK   | 10.61169G    | 52.92             | 74.00             | -21.08         | 47.73         | 3           | Horizontal | 88             | 2.96          | -       | 38.90      | 9.02       | 42.73      |  |  |  |
| AV   | 10.61121G    | 41.11             | 54.00             | -12.89         | 35.92         | 3           | Horizontal | 88             | 2.96          | -       | 38.90      | 9.02       | 42.73      |  |  |  |
| PK   | 15.91908G    | 56.35             | 74.00             | -17.65         | 48.82         | 3           | Horizontal | 216            | 2.23          | -       | 38.28      | 11.41      | 42.16      |  |  |  |
| AV   | 15.92409G    | 43.56             | 54.00             | -10.44         | 36.02         | 3           | Horizontal | 216            | 2.23          | -       | 38.30      | 11.41      | 42.17      |  |  |  |

5.47-5.725GHz\_802.11ax HEW40\_Nss1,(MCS0)\_2TX

5510MHz\_TX

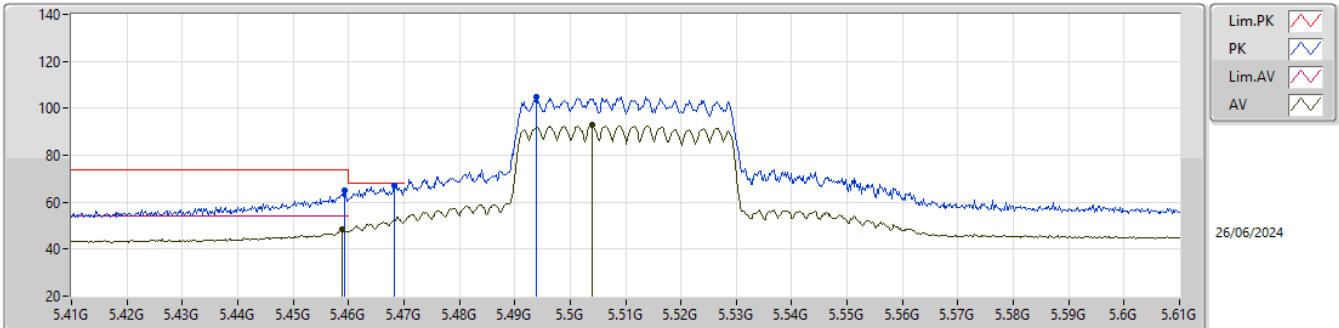


EUT\_Z\_2TX  
Setting 42  
04-D-K-5-10

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|-----------|----------------|---------------|---------|------------|------------|------------|--|--|--|
| PK   | 5.4592G      | 65.05             | 74.00             | -8.95          | 68.90         | 3           | Vertical  | 0              | 1.00          | -       | 33.36      | 6.15       | 43.36      |  |  |  |
| AV   | 5.4588G      | 48.34             | 54.00             | -5.66          | 52.20         | 3           | Vertical  | 0              | 1.00          | -       | 33.35      | 6.15       | 43.36      |  |  |  |
| PK   | 5.4682G      | 67.24             | 68.20             | -0.96          | 71.03         | 3           | Vertical  | 0              | 1.00          | -       | 33.41      | 6.15       | 43.35      |  |  |  |
| PK   | 5.494G       | 104.85            | Inf               | -Inf           | 108.44        | 3           | Vertical  | 0              | 1.00          | -       | 33.56      | 6.17       | 43.32      |  |  |  |
| AV   | 5.504G       | 92.72             | Inf               | -Inf           | 96.25         | 3           | Vertical  | 0              | 1.00          | -       | 33.61      | 6.17       | 43.31      |  |  |  |

5.47-5.725GHz\_802.11ax HEW40\_Nss1,(MCS0)\_2TX


5510MHz\_TX

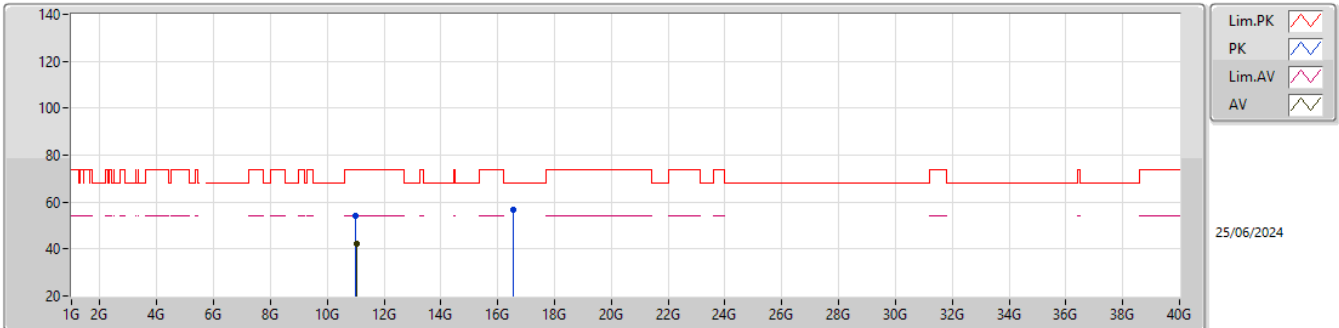EUT\_Y\_2TX  
Setting 42  
04-D-Y-1

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|-----------|----------------|---------------|---------|------------|------------|------------|--|--|--|
| PK   | 11.00662G    | 54.27             | 74.00             | -19.73         | 48.39         | 3           | Vertical  | 43             | 2.74          | -       | 38.89      | 9.22       | 42.23      |  |  |  |
| AV   | 11.03476G    | 42.15             | 54.00             | -11.85         | 36.37         | 3           | Vertical  | 43             | 2.74          | -       | 38.83      | 9.24       | 42.29      |  |  |  |
| PK   | 16.52865G    | 56.70             | 68.20             | -11.50         | 46.78         | 3           | Vertical  | 254            | 2.79          | -       | 39.36      | 11.88      | 41.32      |  |  |  |

5.47-5.725GHz\_802.11ax HEW40\_Nss1,(MCS0)\_2TX


5510MHz\_TX

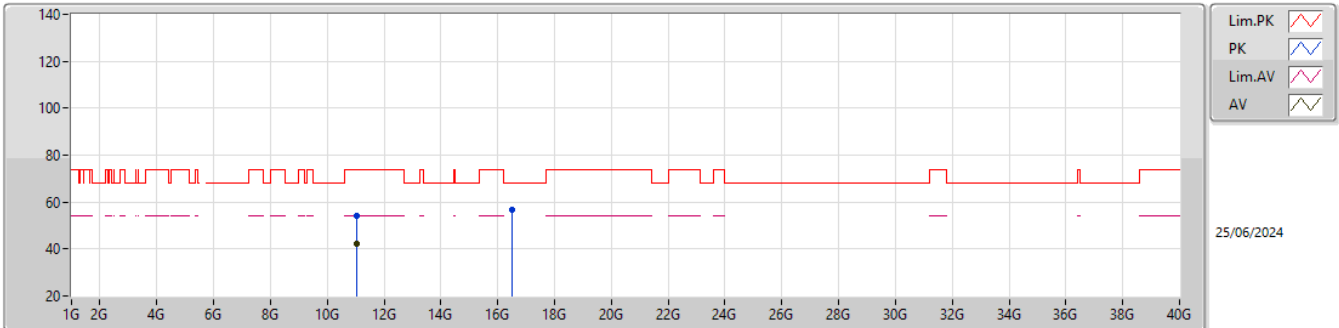EUT\_Y\_2TX  
Setting 42  
04-D-Y-1

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition  | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|------------|----------------|---------------|---------|------------|------------|------------|--|--|--|
| PK   | 11.03125G    | 54.20             | 74.00             | -19.80         | 48.40         | 3           | Horizontal | 247            | 1.58          | -       | 38.84      | 9.24       | 42.28      |  |  |  |
| AV   | 11.03131G    | 42.09             | 54.00             | -11.91         | 36.29         | 3           | Horizontal | 247            | 1.58          | -       | 38.84      | 9.24       | 42.28      |  |  |  |
| PK   | 16.51704G    | 56.55             | 68.20             | -11.65         | 46.65         | 3           | Horizontal | 45             | 1.64          | -       | 39.33      | 11.87      | 41.30      |  |  |  |

5.47-5.725GHz\_802.11ax HEW40\_Nss1,(MCS0)\_2TX

5550MHz\_TX

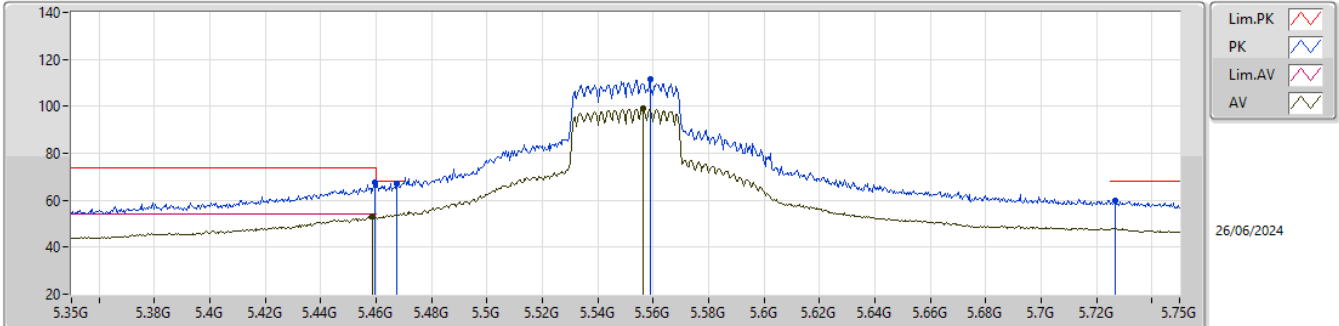


EUT\_Z\_2TX  
Setting 63  
04-D-K-5-10

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|-----------|----------------|---------------|---------|------------|------------|------------|--|--|--|
| PK   | 5.4596G      | 67.43             | 74.00             | -6.57          | 71.28         | 3           | Vertical  | 3              | 2.33          | -       | 33.36      | 6.15       | 43.36      |  |  |  |
| AV   | 5.4588G      | 53.11             | 54.00             | -0.89          | 56.97         | 3           | Vertical  | 3              | 2.33          | -       | 33.35      | 6.15       | 43.36      |  |  |  |
| PK   | 5.4676G      | 67.31             | 68.20             | -0.89          | 71.10         | 3           | Vertical  | 3              | 2.33          | -       | 33.41      | 6.15       | 43.35      |  |  |  |
| PK   | 5.5588G      | 111.41            | Inf               | -Inf           | 114.79        | 3           | Vertical  | 3              | 2.33          | -       | 33.70      | 6.20       | 43.28      |  |  |  |
| AV   | 5.5564G      | 98.98             | Inf               | -Inf           | 102.36        | 3           | Vertical  | 3              | 2.33          | -       | 33.70      | 6.20       | 43.28      |  |  |  |
| PK   | 5.7268G      | 59.89             | 68.20             | -8.31          | 62.95         | 3           | Vertical  | 3              | 2.33          | -       | 33.91      | 6.21       | 43.18      |  |  |  |

5.47-5.725GHz\_802.11ax HEW40\_Nss1,(MCS0)\_2TX


5550MHz\_TX

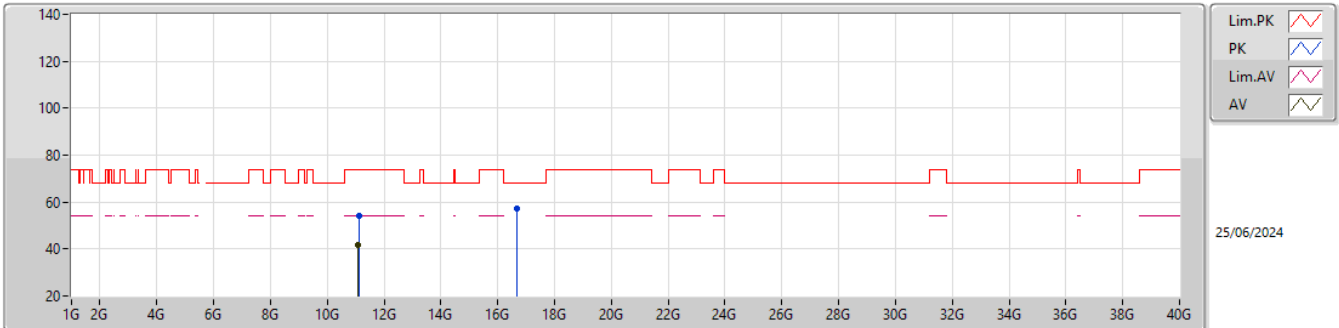EUT\_Y\_2TX  
Setting 63  
04-D-Y-1

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|-----------|----------------|---------------|---------|------------|------------|------------|--|--|--|
| PK   | 11.10963G    | 53.96             | 74.00             | -20.04         | 48.35         | 3           | Vertical  | 119            | 2.80          | -       | 38.76      | 9.28       | 42.43      |  |  |  |
| AV   | 11.09265G    | 41.73             | 54.00             | -12.27         | 36.06         | 3           | Vertical  | 119            | 2.80          | -       | 38.80      | 9.27       | 42.40      |  |  |  |
| PK   | 16.65873G    | 57.11             | 68.20             | -11.09         | 47.20         | 3           | Vertical  | 65             | 1.99          | -       | 39.52      | 11.98      | 41.59      |  |  |  |

5.47-5.725GHz\_802.11ax HEW40\_Nss1,(MCS0)\_2TX

5550MHz\_TX

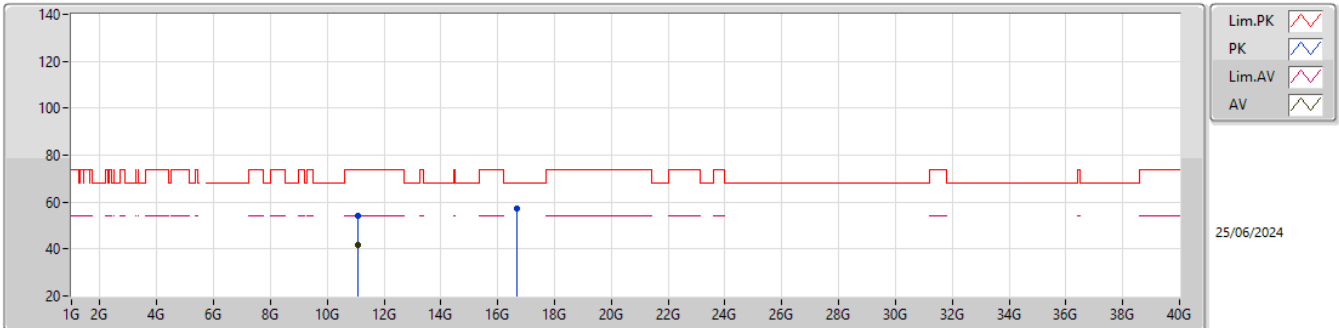


EUT\_Y\_2TX  
Setting 63  
04-D-Y-1

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition  | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|------------|----------------|---------------|---------|------------|------------|------------|--|--|--|
| PK   | 11.09151G    | 53.98             | 74.00             | -20.02         | 48.31         | 3           | Horizontal | 56             | 2.54          | -       | 38.80      | 9.27       | 42.40      |  |  |  |
| AV   | 11.09427G    | 41.84             | 54.00             | -12.16         | 36.17         | 3           | Horizontal | 56             | 2.54          | -       | 38.80      | 9.27       | 42.40      |  |  |  |
| PK   | 16.662G      | 57.36             | 68.20             | -10.84         | 47.45         | 3           | Horizontal | 297            | 2.26          | -       | 39.52      | 11.98      | 41.59      |  |  |  |

5.47-5.725GHz\_802.11ax HEW40\_Nss1,(MCS0)\_2TX

5670MHz\_TX

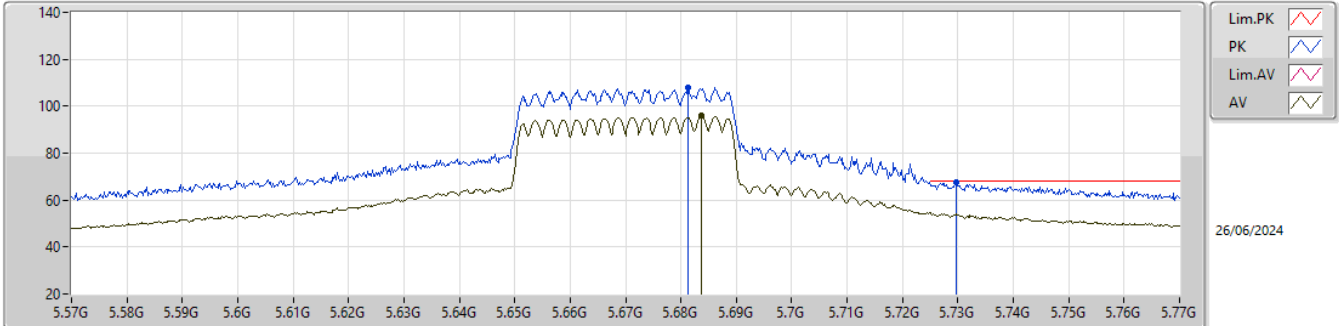


EUT\_Z\_2TX  
Setting 56  
04-D-K-5-10

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|-----------|----------------|---------------|---------|------------|------------|------------|--|--|--|
| PK   | 5.6812G      | 107.86            | Inf               | -Inf           | 111.10        | 3           | Vertical  | 4              | 2.47          | -       | 33.76      | 6.21       | 43.21      |  |  |  |
| AV   | 5.6836G      | 96.05             | Inf               | -Inf           | 99.28         | 3           | Vertical  | 4              | 2.47          | -       | 33.77      | 6.21       | 43.21      |  |  |  |
| PK   | 5.7298G      | 67.79             | 68.20             | -0.41          | 70.84         | 3           | Vertical  | 4              | 2.47          | -       | 33.92      | 6.21       | 43.18      |  |  |  |

5.47-5.725GHz\_802.11ax HEW40\_Nss1,(MCS0)\_2TX


5670MHz\_TX

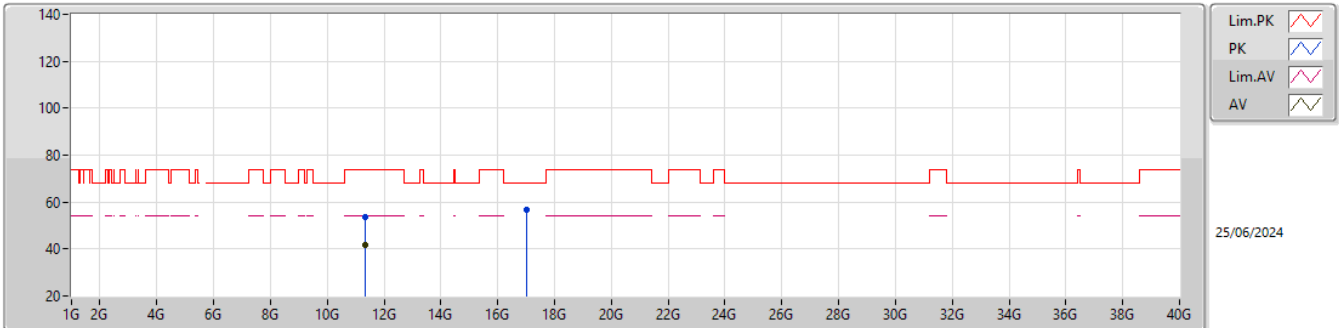EUT\_Y\_2TX  
Setting 56  
04-D-Y-1

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|-----------|----------------|---------------|---------|------------|------------|------------|--|--|--|
| PK   | 11.33565G    | 53.79             | 74.00             | -20.21         | 48.48         | 3           | Vertical  | 67             | 2.42          | -       | 38.80      | 9.39       | 42.88      |  |  |  |
| AV   | 11.32971G    | 41.65             | 54.00             | -12.35         | 36.33         | 3           | Vertical  | 67             | 2.42          | -       | 38.80      | 9.39       | 42.87      |  |  |  |
| PK   | 17.02116G    | 56.78             | 68.20             | -11.42         | 46.22         | 3           | Vertical  | 47             | 2.04          | -       | 40.58      | 12.27      | 42.29      |  |  |  |

5.47-5.725GHz\_802.11ax HEW40\_Nss1,(MCS0)\_2TX


5670MHz\_TX

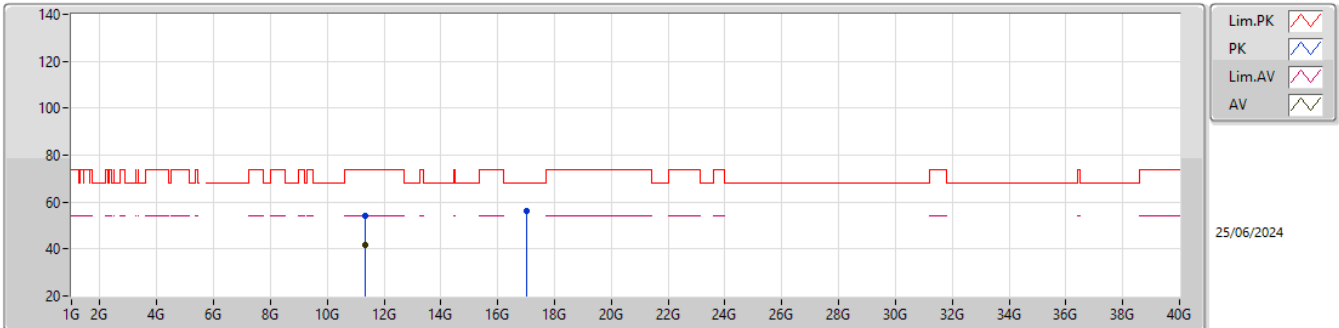EUT\_Y\_2TX  
Setting 56  
04-D-Y-1

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition  | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|------------|----------------|---------------|---------|------------|------------|------------|--|--|--|
| PK   | 11.3361G     | 53.94             | 74.00             | -20.06         | 48.63         | 3           | Horizontal | 259            | 1.06          | -       | 38.80      | 9.39       | 42.88      |  |  |  |
| AV   | 11.3436G     | 41.54             | 54.00             | -12.46         | 36.23         | 3           | Horizontal | 259            | 1.06          | -       | 38.80      | 9.40       | 42.89      |  |  |  |
| PK   | 17.0238G     | 56.22             | 68.20             | -11.98         | 45.64         | 3           | Horizontal | 330            | 2.16          | -       | 40.60      | 12.27      | 42.29      |  |  |  |

5.47-5.725GHz\_802.11ax HEW40\_Nss1,(MCS0)\_2TX

5710MHz Straddle 5.47-5.725GHz\_TX

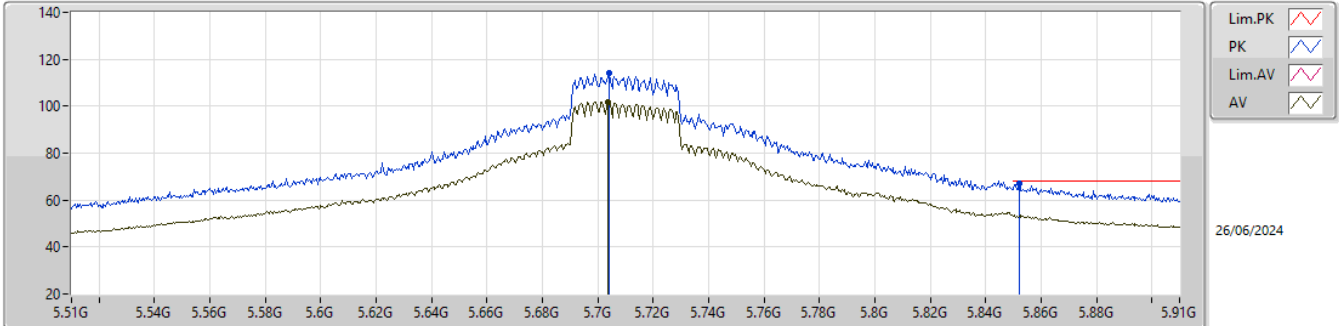


EUT\_Z\_2TX  
Setting 73  
04-D-K-5-10

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|-----------|----------------|---------------|---------|------------|------------|------------|--|--|--|
| PK   | 5.704G       | 114.16            | Inf               | -Inf           | 117.33        | 3           | Vertical  | 0              | 2.16          | -       | 33.82      | 6.21       | 43.20      |  |  |  |
| AV   | 5.7036G      | 101.85            | Inf               | -Inf           | 105.03        | 3           | Vertical  | 0              | 2.16          | -       | 33.81      | 6.21       | 43.20      |  |  |  |
| PK   | 5.852G       | 67.12             | 68.20             | -1.08          | 69.57         | 3           | Vertical  | 0              | 2.16          | -       | 34.41      | 6.25       | 43.11      |  |  |  |

5.47-5.725GHz\_802.11ax HEW40\_Nss1,(MCS0)\_2TX

5710MHz Straddle 5.47-5.725GHz\_TX

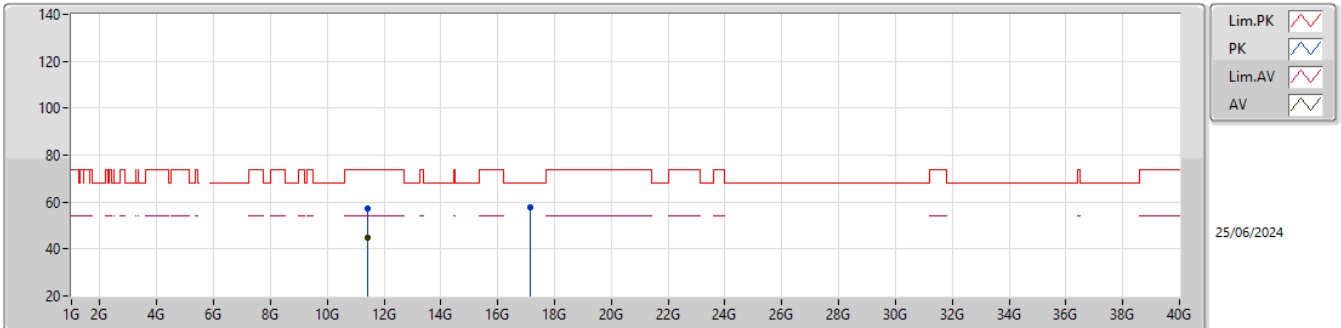


EUT\_Y\_2TX  
Setting 73  
04-D-Y-1

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|-----------|----------------|---------------|---------|------------|------------|------------|--|--|--|
| PK   | 11.42093G    | 57.47             | 74.00             | -16.53         | 52.29         | 3           | Vertical  | 287            | 2.47          | -       | 38.80      | 9.43       | 43.05      |  |  |  |
| AV   | 11.4215G     | 44.78             | 54.00             | -9.22          | 39.60         | 3           | Vertical  | 287            | 2.47          | -       | 38.80      | 9.43       | 43.05      |  |  |  |
| PK   | 17.1369G     | 57.99             | 68.20             | -10.21         | 46.83         | 3           | Vertical  | 53             | 1.02          | -       | 41.07      | 12.37      | 42.28      |  |  |  |

5.47-5.725GHz\_802.11ax HEW40\_Nss1,(MCS0)\_2TX

5710MHz Straddle 5.47-5.725GHz\_TX

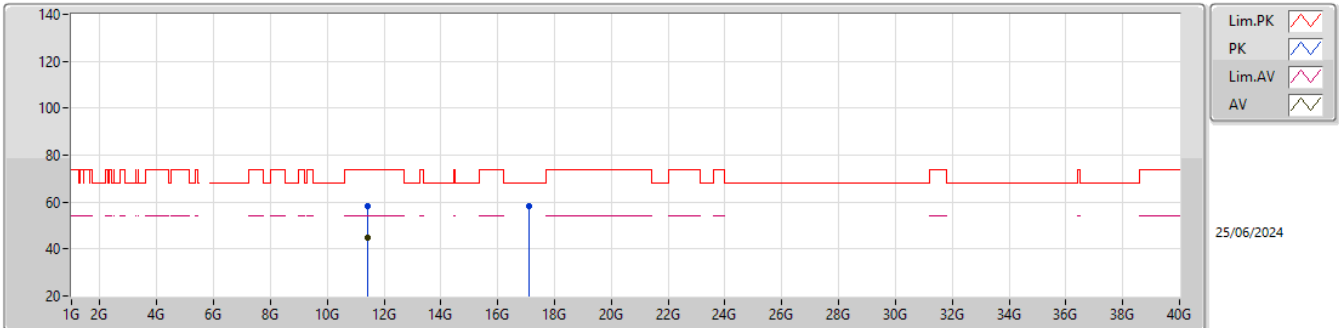


EUT\_Y\_2TX  
Setting 73  
04-D-Y-1

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition  | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|------------|----------------|---------------|---------|------------|------------|------------|--|--|--|
| PK   | 11.42063G    | 58.13             | 74.00             | -15.87         | 52.94         | 3           | Horizontal | 106            | 1.86          | -       | 38.80      | 9.43       | 43.04      |  |  |  |
| AV   | 11.42828G    | 44.86             | 54.00             | -9.14          | 39.68         | 3           | Horizontal | 106            | 1.86          | -       | 38.80      | 9.44       | 43.06      |  |  |  |
| PK   | 17.11911G    | 58.25             | 68.20             | -9.95          | 47.14         | 3           | Horizontal | 35             | 2.11          | -       | 41.04      | 12.35      | 42.28      |  |  |  |

5.725-5.85GHz\_802.11ax HEW40\_Nss1,(MCS0)\_2TX

5755MHz\_TX

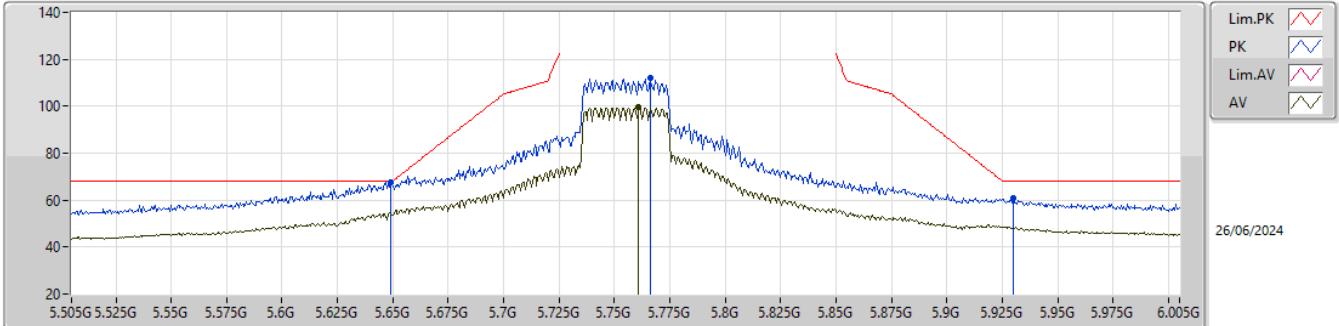


EUT\_Z\_2TX  
Setting 66  
04-D-K-5-10

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|-----------|----------------|---------------|---------|------------|------------|------------|--|--|--|
| PK   | 5.649G       | 67.50             | 68.20             | -0.70          | 70.81         | 3           | Vertical  | 4              | 2.23          | -       | 33.70      | 6.22       | 43.23      |  |  |  |
| PK   | 5.766G       | 111.83            | Inf               | -Inf           | 114.73        | 3           | Vertical  | 4              | 2.23          | -       | 34.06      | 6.20       | 43.16      |  |  |  |
| AV   | 5.761G       | 99.43             | Inf               | -Inf           | 102.35        | 3           | Vertical  | 4              | 2.23          | -       | 34.04      | 6.20       | 43.16      |  |  |  |
| PK   | 5.93G        | 61.06             | 68.20             | -7.14          | 62.93         | 3           | Vertical  | 4              | 2.23          | -       | 34.88      | 6.32       | 43.07      |  |  |  |

5.725-5.85GHz\_802.11ax HEW40\_Nss1,(MCS0)\_2TX


5755MHz\_TX

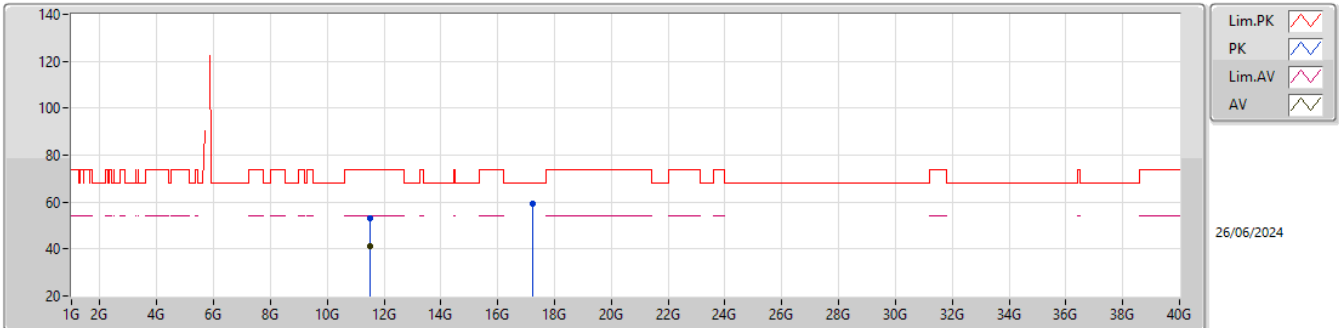EUT\_Y\_2TX  
Setting 66  
04-D-Y-1

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|-----------|----------------|---------------|---------|------------|------------|------------|--|--|--|
| PK   | 11.49509G    | 53.24             | 74.00             | -20.76         | 48.16         | 3           | Vertical  | 17             | 2.81          | -       | 38.80      | 9.47       | 43.19      |  |  |  |
| AV   | 11.49608G    | 41.12             | 54.00             | -12.88         | 36.04         | 3           | Vertical  | 17             | 2.81          | -       | 38.80      | 9.47       | 43.19      |  |  |  |
| PK   | 17.25294G    | 59.14             | 68.20             | -9.06          | 47.63         | 3           | Vertical  | 293            | 1.84          | -       | 41.32      | 12.46      | 42.27      |  |  |  |

5.725-5.85GHz\_802.11ax HEW40\_Nss1,(MCS0)\_2TX


5755MHz\_TX

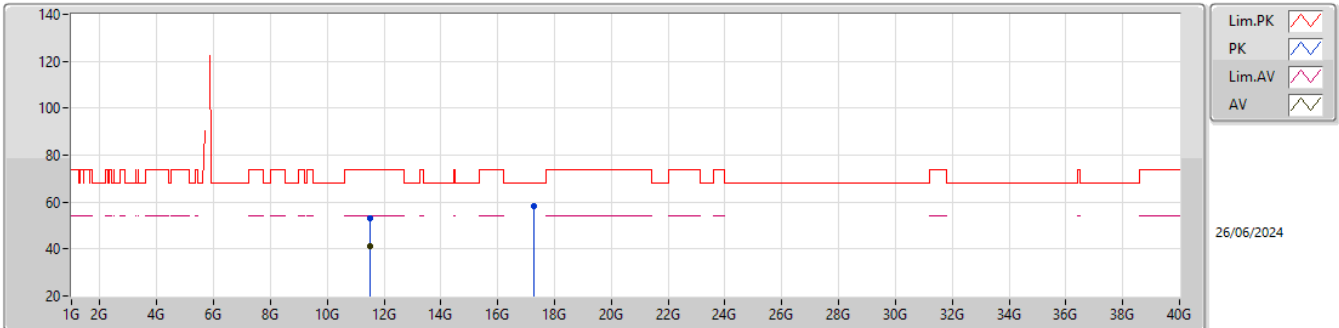EUT\_Y\_2TX  
Setting 66  
04-D-Y-1

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition  | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|------------|----------------|---------------|---------|------------|------------|------------|--|--|--|
| PK   | 11.52209G    | 53.16             | 74.00             | -20.84         | 48.06         | 3           | Horizontal | 23             | 2.66          | -       | 38.80      | 9.49       | 43.19      |  |  |  |
| AV   | 11.50229G    | 41.06             | 54.00             | -12.94         | 35.98         | 3           | Horizontal | 23             | 2.66          | -       | 38.80      | 9.48       | 43.20      |  |  |  |
| PK   | 17.26488G    | 58.39             | 68.20             | -9.81          | 46.80         | 3           | Horizontal | 129            | 1.59          | -       | 41.39      | 12.47      | 42.27      |  |  |  |

5.725-5.85GHz\_802.11ax HEW40\_Nss1,(MCS0)\_2TX

5795MHz\_TX

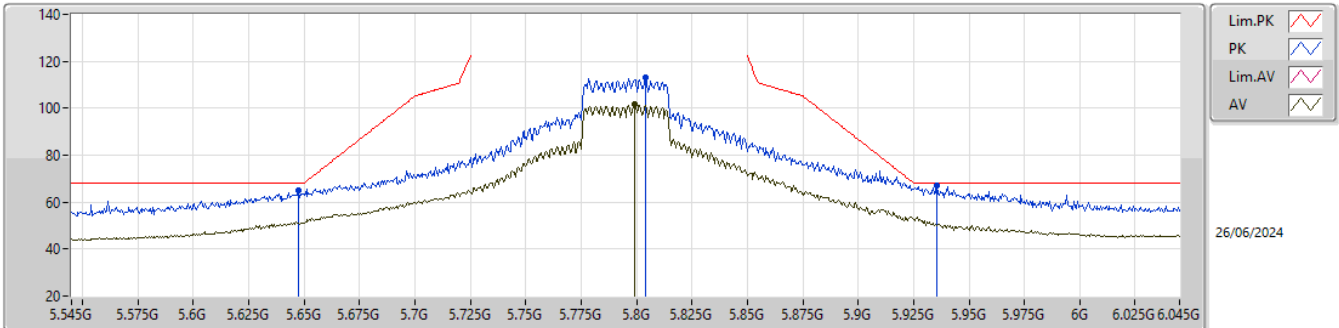


EUT\_Z\_2TX  
Setting 72  
04-D-K-5-10

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|-----------|----------------|---------------|---------|------------|------------|------------|--|--|--|
| PK   | 5.6475G      | 64.77             | 68.20             | -3.43          | 68.08         | 3           | Vertical  | 345            | 2.16          | -       | 33.70      | 6.22       | 43.23      |  |  |  |
| PK   | 5.804G       | 112.95            | Inf               | -Inf           | 115.67        | 3           | Vertical  | 345            | 2.16          | -       | 34.22      | 6.20       | 43.14      |  |  |  |
| AV   | 5.799G       | 101.54            | Inf               | -Inf           | 104.28        | 3           | Vertical  | 345            | 2.16          | -       | 34.20      | 6.20       | 43.14      |  |  |  |
| PK   | 5.9355G      | 67.24             | 68.20             | -0.96          | 69.08         | 3           | Vertical  | 345            | 2.16          | -       | 34.91      | 6.32       | 43.07      |  |  |  |

5.725-5.85GHz\_802.11ax HEW40\_Nss1,(MCS0)\_2TX


5795MHz\_TX

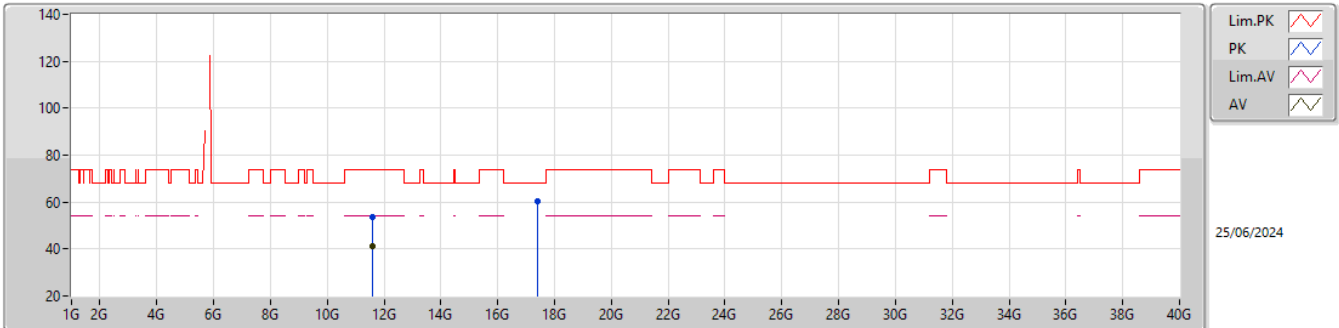EUT\_Y\_2TX  
Setting 72  
04-D-Y-1

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|-----------|----------------|---------------|---------|------------|------------|------------|--|--|--|
| PK   | 11.59615G    | 53.78             | 74.00             | -20.22         | 48.60         | 3           | Vertical  | 151            | 1.01          | -       | 38.80      | 9.52       | 43.14      |  |  |  |
| AV   | 11.59426G    | 41.22             | 54.00             | -12.78         | 36.04         | 3           | Vertical  | 151            | 1.01          | -       | 38.80      | 9.52       | 43.14      |  |  |  |
| PK   | 17.3916G     | 60.30             | 68.20             | -7.90          | 48.12         | 3           | Vertical  | 350            | 1.49          | -       | 41.87      | 12.57      | 42.26      |  |  |  |

5.725-5.85GHz\_802.11ax HEW40\_Nss1,(MCS0)\_2TX


5795MHz\_TX

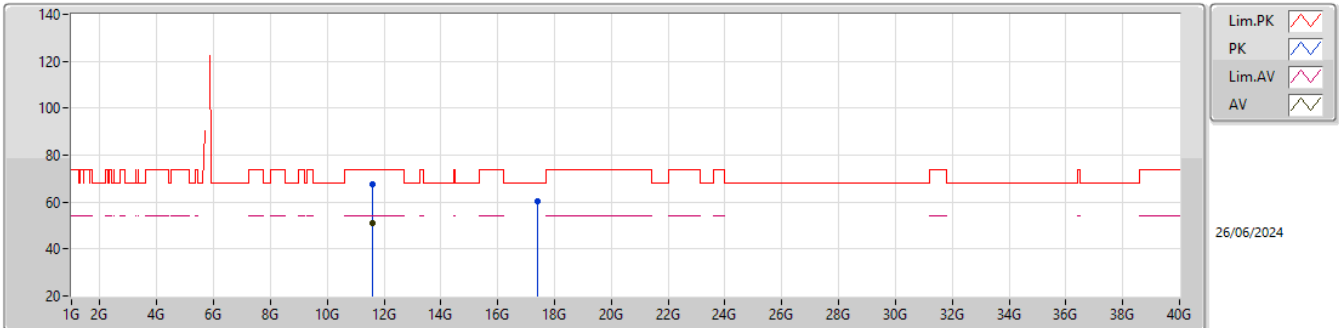EUT\_Y\_2TX  
Setting 72  
04-D-Y-1

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition  | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|------------|----------------|---------------|---------|------------|------------|------------|--|--|--|
| PK   | 11.5771G     | 67.71             | 74.00             | -6.29          | 62.55         | 3           | Horizontal | 212            | 1.45          | -       | 38.80      | 9.51       | 43.15      |  |  |  |
| AV   | 11.57521G    | 51.23             | 54.00             | -2.77          | 46.07         | 3           | Horizontal | 212            | 1.45          | -       | 38.80      | 9.51       | 43.15      |  |  |  |
| PK   | 17.39226G    | 60.17             | 68.20             | -8.03          | 47.99         | 3           | Horizontal | 199            | 2.18          | -       | 41.87      | 12.57      | 42.26      |  |  |  |

## 5.15-5.25GHz\_802.11ax HEW80\_Nss1,(MCS0)\_2TX

### 5210MHz\_TX

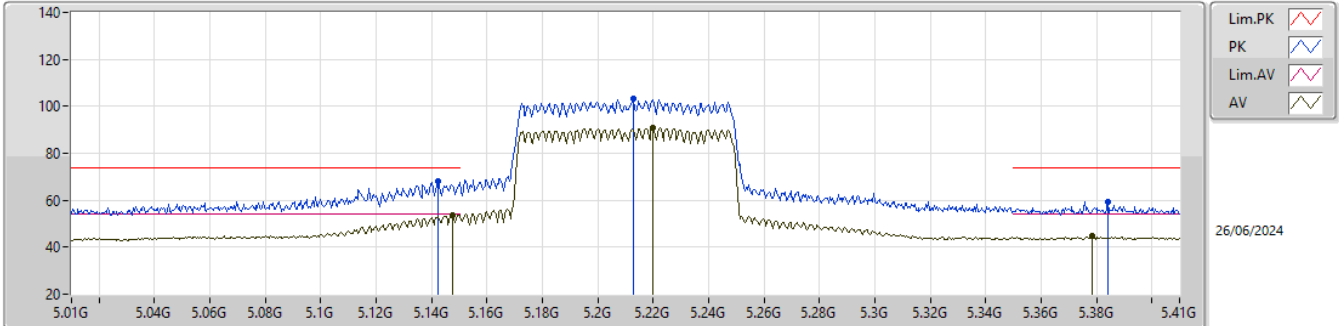


EUT\_Z\_2TX  
Setting 40  
04-D-K-5-10

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|-----------|----------------|---------------|---------|------------|------------|------------|--|--|--|
| PK   | 5.1424G      | 68.17             | 74.00             | -5.83          | 73.42         | 3           | Vertical  | 45             | 1.00          | -       | 32.58      | 5.89       | 43.72      |  |  |  |
| AV   | 5.1476G      | 53.87             | 54.00             | -0.13          | 59.09         | 3           | Vertical  | 45             | 1.00          | -       | 32.60      | 5.90       | 43.72      |  |  |  |
| PK   | 5.2128G      | 103.04            | Inf               | -Inf           | 108.05        | 3           | Vertical  | 45             | 1.00          | -       | 32.70      | 5.93       | 43.64      |  |  |  |
| AV   | 5.22G        | 90.78             | Inf               | -Inf           | 95.77         | 3           | Vertical  | 45             | 1.00          | -       | 32.70      | 5.94       | 43.63      |  |  |  |
| PK   | 5.384G       | 59.24             | 74.00             | -14.76         | 63.54         | 3           | Vertical  | 45             | 1.00          | -       | 33.04      | 6.10       | 43.44      |  |  |  |
| AV   | 5.3784G      | 44.59             | 54.00             | -9.41          | 48.93         | 3           | Vertical  | 45             | 1.00          | -       | 33.01      | 6.10       | 43.45      |  |  |  |

## 5.15-5.25GHz\_802.11ax HEW80\_Nss1,(MCS0)\_2TX

## 5210MHz\_TX

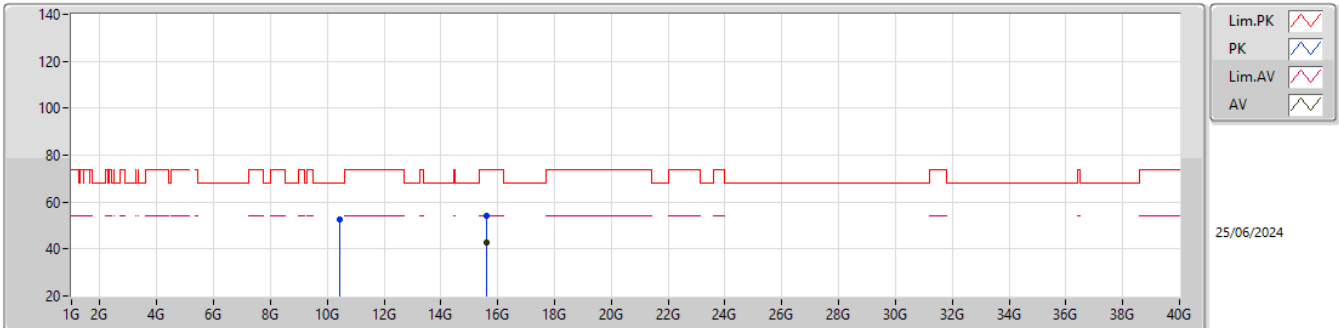


EUT\_Y\_2TX  
Setting 40  
04-D-Y-1

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|-----------|----------------|---------------|---------|------------|------------|------------|--|--|--|
| PK   | 10.42552G    | 52.70             | 68.20             | -15.50         | 48.02         | 3           | Vertical  | 124            | 2.76          | -       | 38.60      | 8.93       | 42.85      |  |  |  |
| PK   | 15.62076G    | 54.29             | 74.00             | -19.71         | 46.36         | 3           | Vertical  | 305            | 1.89          | -       | 38.23      | 11.27      | 41.57      |  |  |  |
| AV   | 15.61911G    | 42.99             | 54.00             | -11.01         | 35.04         | 3           | Vertical  | 305            | 1.89          | -       | 38.25      | 11.27      | 41.57      |  |  |  |

### 5.15-5.25GHz\_802.11ax HEW80\_Nss1,(MCS0)\_2TX

#### 5210MHz\_TX

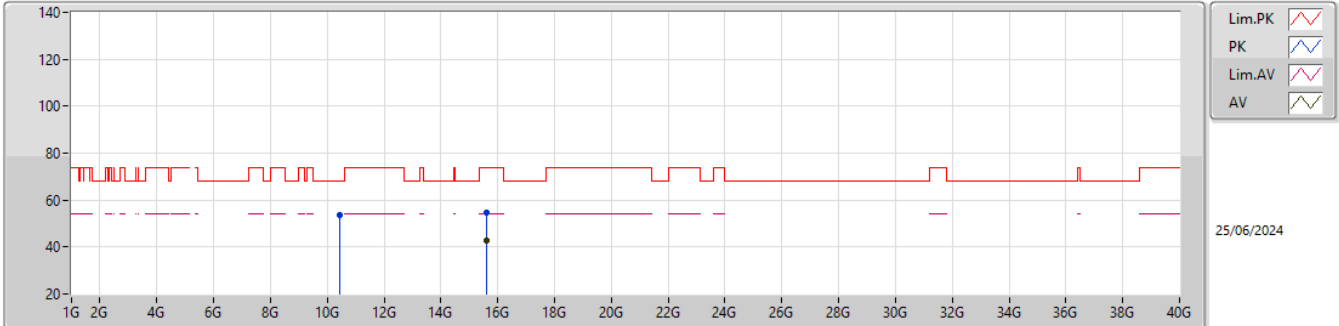


EUT\_Y\_2TX  
Setting 40  
04-D-Y-1

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition  | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|------------|----------------|---------------|---------|------------|------------|------------|--|--|--|
| PK   | 10.4299G     | 53.48             | 68.20             | -14.72         | 48.80         | 3           | Horizontal | 263            | 1.61          | -       | 38.60      | 8.93       | 42.85      |  |  |  |
| PK   | 15.62436G    | 54.52             | 74.00             | -19.48         | 46.62         | 3           | Horizontal | 335            | 2.67          | -       | 38.21      | 11.27      | 41.58      |  |  |  |
| AV   | 15.61854G    | 42.66             | 54.00             | -11.34         | 34.70         | 3           | Horizontal | 335            | 2.67          | -       | 38.25      | 11.27      | 41.56      |  |  |  |

## 5.25-5.35GHz\_802.11ax HEW80\_Nss1,(MCS0)\_2TX

### 5290MHz\_TX

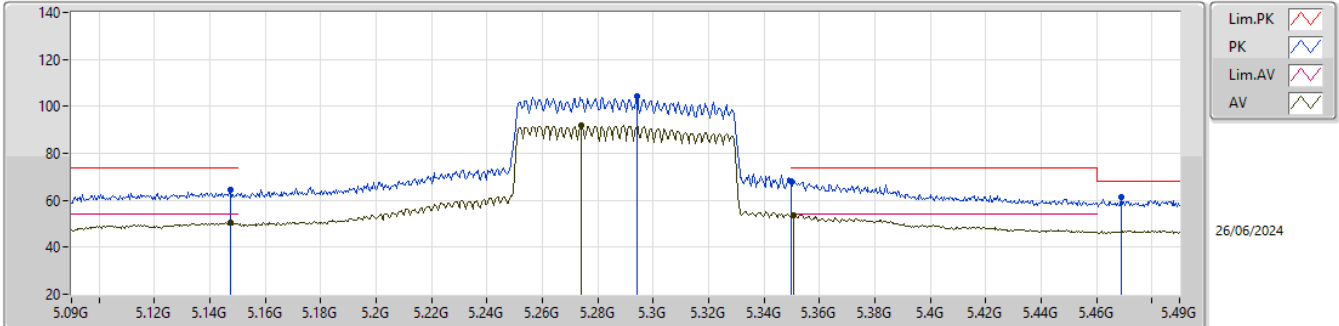


EUT\_Z\_2TX  
Setting 51  
04-D-K-5-10

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|-----------|----------------|---------------|---------|------------|------------|------------|--|--|--|
| PK   | 5.1472G      | 64.47             | 74.00             | -9.53          | 69.70         | 3           | Vertical  | 348            | 3.00          | -       | 32.59      | 5.90       | 43.72      |  |  |  |
| AV   | 5.1476G      | 50.45             | 54.00             | -3.55          | 55.67         | 3           | Vertical  | 348            | 3.00          | -       | 32.60      | 5.90       | 43.72      |  |  |  |
| PK   | 5.294G       | 104.18            | Inf               | -Inf           | 108.93        | 3           | Vertical  | 348            | 3.00          | -       | 32.79      | 6.01       | 43.55      |  |  |  |
| AV   | 5.274G       | 91.69             | Inf               | -Inf           | 96.52         | 3           | Vertical  | 348            | 3.00          | -       | 32.75      | 5.99       | 43.57      |  |  |  |
| PK   | 5.35G        | 68.36             | 74.00             | -5.64          | 72.87         | 3           | Vertical  | 348            | 3.00          | -       | 32.90      | 6.07       | 43.48      |  |  |  |
| AV   | 5.3508G      | 53.76             | 54.00             | -0.24          | 58.27         | 3           | Vertical  | 348            | 3.00          | -       | 32.90      | 6.07       | 43.48      |  |  |  |
| PK   | 5.4688G      | 61.25             | 68.20             | -6.95          | 65.04         | 3           | Vertical  | 348            | 3.00          | -       | 33.41      | 6.15       | 43.35      |  |  |  |

5.25-5.35GHz\_802.11ax HEW80\_Nss1,(MCS0)\_2TX


5290MHz\_TX

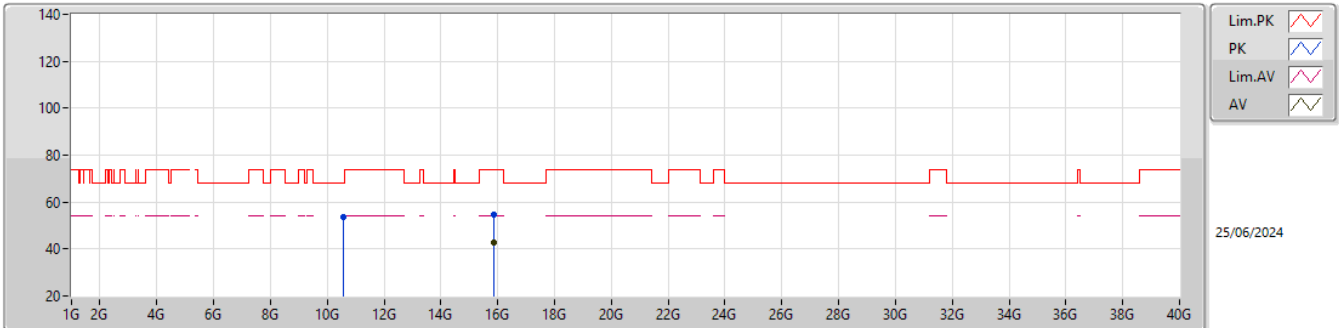EUT Y\_2TX  
Setting 51  
04-D-Y-1

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|-----------|----------------|---------------|---------|------------|------------|------------|--|--|--|
| PK   | 10.57409G    | 53.40             | 68.20             | -14.80         | 48.33         | 3           | Vertical  | 60             | 1.37          | -       | 38.85      | 9.00       | 42.78      |  |  |  |
| PK   | 15.87267G    | 54.89             | 74.00             | -19.11         | 47.42         | 3           | Vertical  | 153            | 2.82          | -       | 38.15      | 11.39      | 42.07      |  |  |  |
| AV   | 15.88272G    | 42.92             | 54.00             | -11.08         | 35.45         | 3           | Vertical  | 153            | 2.82          | -       | 38.17      | 11.39      | 42.09      |  |  |  |

5.25-5.35GHz\_802.11ax HEW80\_Nss1,(MCS0)\_2TX


5290MHz\_TX

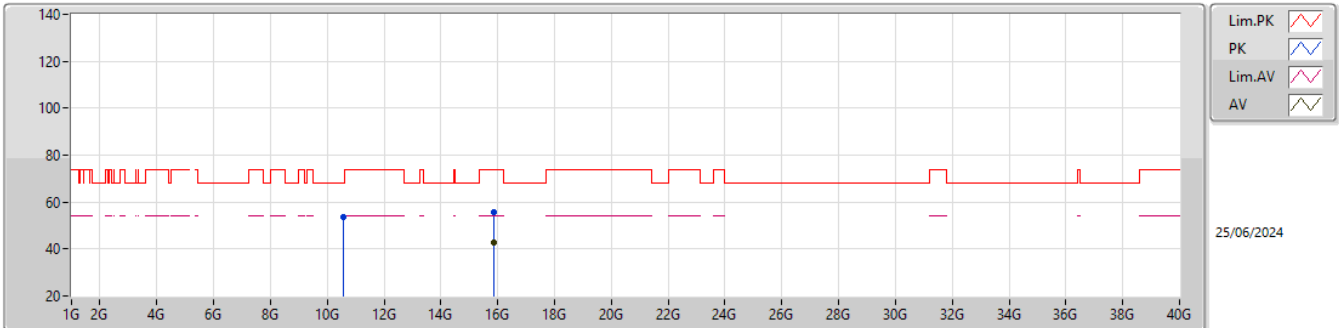EUT Y\_2TX  
Setting 51  
04-D-Y-1

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition  | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|------------|----------------|---------------|---------|------------|------------|------------|--|--|--|
| PK   | 10.57115G    | 53.56             | 68.20             | -14.64         | 48.51         | 3           | Horizontal | 155            | 2.84          | -       | 38.84      | 9.00       | 42.79      |  |  |  |
| PK   | 15.86082G    | 55.48             | 74.00             | -18.52         | 48.02         | 3           | Horizontal | 207            | 1.69          | -       | 38.12      | 11.38      | 42.04      |  |  |  |
| AV   | 15.87726G    | 42.93             | 54.00             | -11.07         | 35.47         | 3           | Horizontal | 207            | 1.69          | -       | 38.15      | 11.39      | 42.08      |  |  |  |

5.47-5.725GHz\_802.11ax HEW80\_Nss1,(MCS0)\_2TX

5530MHz\_TX

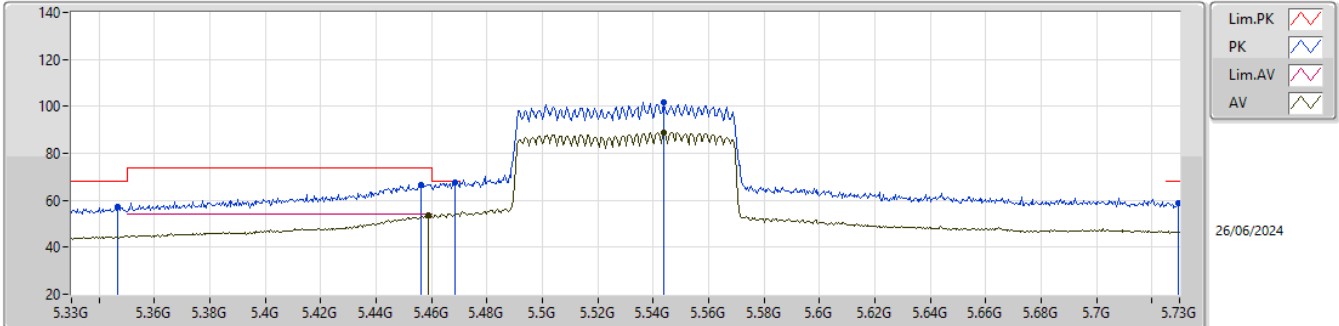


EUT\_Z\_2TX  
Setting 35  
04-D-Y-1-10

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|-----------|----------------|---------------|---------|------------|------------|------------|--|--|--|
| PK   | 5.3468G      | 57.02             | 68.20             | -11.18         | 61.55         | 3           | Vertical  | 348            | 2.22          | -       | 32.89      | 6.07       | 43.49      |  |  |  |
| PK   | 5.456G       | 66.80             | 74.00             | -7.20          | 70.67         | 3           | Vertical  | 348            | 2.22          | -       | 33.34      | 6.15       | 43.36      |  |  |  |
| AV   | 5.4588G      | 53.48             | 54.00             | -0.52          | 57.34         | 3           | Vertical  | 348            | 2.22          | -       | 33.35      | 6.15       | 43.36      |  |  |  |
| PK   | 5.4684G      | 67.54             | 68.20             | -0.66          | 71.33         | 3           | Vertical  | 348            | 2.22          | -       | 33.41      | 6.15       | 43.35      |  |  |  |
| PK   | 5.5436G      | 101.59            | Inf               | -Inf           | 105.00        | 3           | Vertical  | 348            | 2.22          | -       | 33.69      | 6.19       | 43.29      |  |  |  |
| AV   | 5.544G       | 88.91             | Inf               | -Inf           | 92.32         | 3           | Vertical  | 348            | 2.22          | -       | 33.69      | 6.19       | 43.29      |  |  |  |
| PK   | 5.7296G      | 58.89             | 68.20             | -9.31          | 61.94         | 3           | Vertical  | 348            | 2.22          | -       | 33.92      | 6.21       | 43.18      |  |  |  |

5.47-5.725GHz\_802.11ax HEW80\_Nss1,(MCS0)\_2TX

5530MHz\_TX

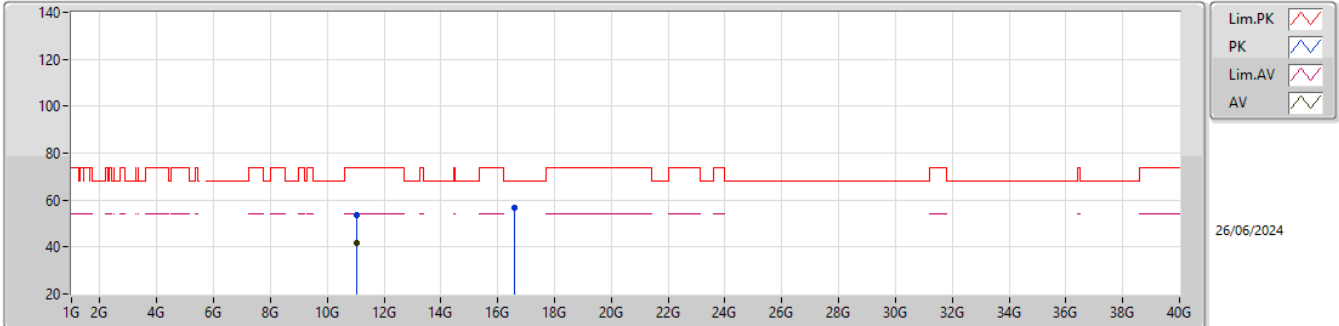


EUT\_Y\_2TX  
Setting 35  
04-D-Y-1

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|-----------|----------------|---------------|---------|------------|------------|------------|--|--|--|
| PK   | 11.05676G    | 53.70             | 74.00             | -20.30         | 47.98         | 3           | Vertical  | 202            | 1.51          | -       | 38.80      | 9.25       | 42.33      |  |  |  |
| AV   | 11.0489G     | 41.85             | 54.00             | -12.15         | 36.13         | 3           | Vertical  | 202            | 1.51          | -       | 38.80      | 9.24       | 42.32      |  |  |  |
| PK   | 16.59408G    | 56.89             | 68.20             | -11.31         | 47.10         | 3           | Vertical  | 354            | 1.83          | -       | 39.31      | 11.93      | 41.45      |  |  |  |

5.47-5.725GHz\_802.11ax HEW80\_Nss1,(MCS0)\_2TX

5530MHz\_TX

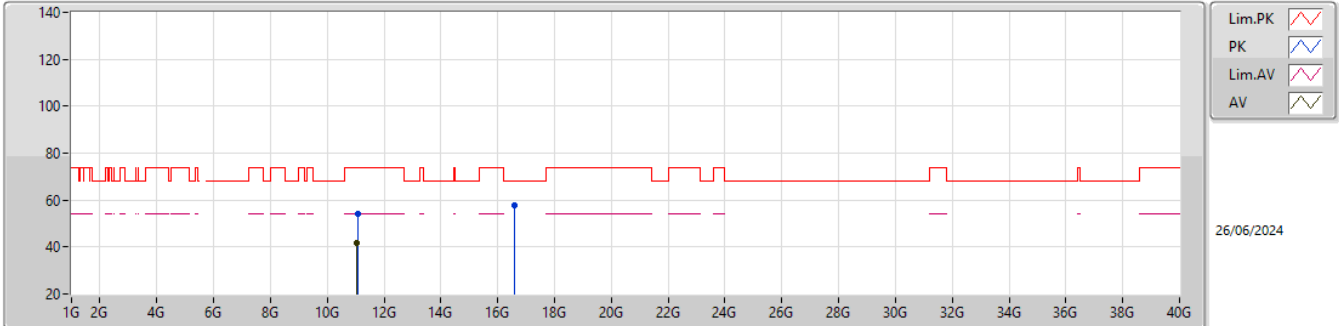


EUT\_Y\_2TX  
Setting 35  
04-D-Y-1

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition  | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|------------|----------------|---------------|---------|------------|------------|------------|--|--|--|
| PK   | 11.05994G    | 54.21             | 74.00             | -19.79         | 48.50         | 3           | Horizontal | 38             | 1.03          | -       | 38.80      | 9.25       | 42.34      |  |  |  |
| AV   | 11.04731G    | 41.89             | 54.00             | -12.11         | 36.15         | 3           | Horizontal | 38             | 1.03          | -       | 38.81      | 9.24       | 42.31      |  |  |  |
| PK   | 16.59543G    | 57.73             | 68.20             | -10.47         | 47.95         | 3           | Horizontal | 149            | 1.70          | -       | 39.31      | 11.93      | 41.46      |  |  |  |

5.47-5.725GHz\_802.11ax HEW80\_Nss1,(MCS0)\_2TX

5610MHz\_TX

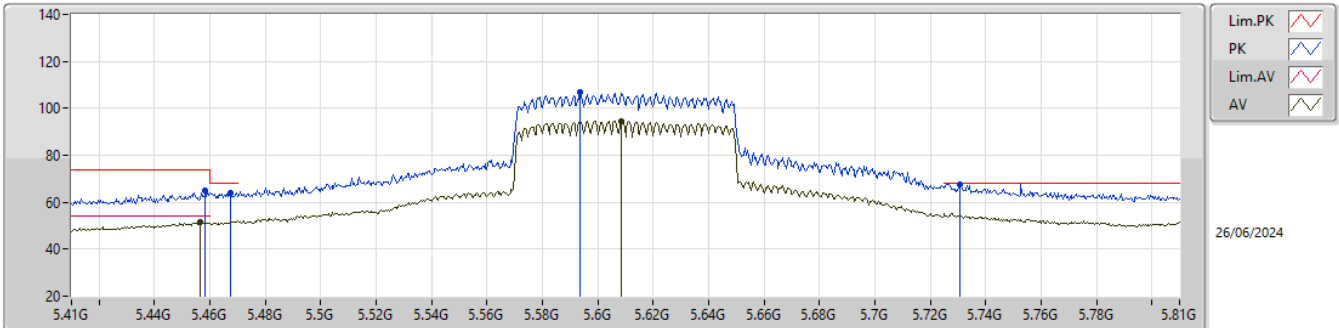


EUT\_Z\_2TX  
Setting 60  
04-D-Y-1-10

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|-----------|----------------|---------------|---------|------------|------------|------------|--|--|--|
| PK   | 5.4584G      | 65.01             | 74.00             | -8.99          | 68.87         | 3           | Vertical  | 0              | 2.26          | -       | 33.35      | 6.15       | 43.36      |  |  |  |
| AV   | 5.4564G      | 51.61             | 54.00             | -2.39          | 55.48         | 3           | Vertical  | 0              | 2.26          | -       | 33.34      | 6.15       | 43.36      |  |  |  |
| PK   | 5.4672G      | 64.01             | 68.20             | -4.19          | 67.81         | 3           | Vertical  | 0              | 2.26          | -       | 33.40      | 6.15       | 43.35      |  |  |  |
| PK   | 5.5936G      | 106.99            | Inf               | -Inf           | 110.33        | 3           | Vertical  | 0              | 2.26          | -       | 33.70      | 6.22       | 43.26      |  |  |  |
| AV   | 5.6084G      | 94.60             | Inf               | -Inf           | 97.93         | 3           | Vertical  | 0              | 2.26          | -       | 33.70      | 6.22       | 43.25      |  |  |  |
| PK   | 5.7308G      | 67.82             | 68.20             | -0.38          | 70.87         | 3           | Vertical  | 0              | 2.26          | -       | 33.92      | 6.21       | 43.18      |  |  |  |

5.47-5.725GHz\_802.11ax HEW80\_Nss1,(MCS0)\_2TX

5610MHz\_TX

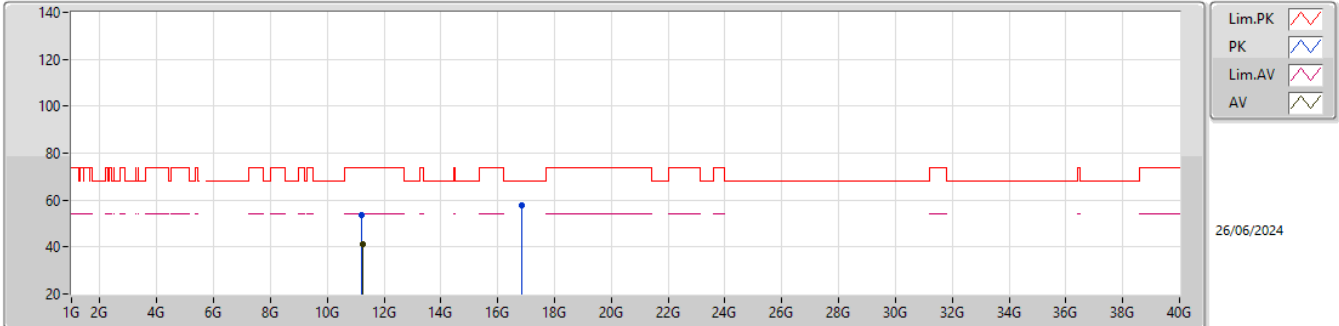


EUT\_Y\_2TX  
Setting 60  
04-D-Y-1

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|-----------|----------------|---------------|---------|------------|------------|------------|--|--|--|
| PK   | 11.2227G     | 53.39             | 74.00             | -20.61         | 48.07         | 3           | Vertical  | 158            | 2.50          | -       | 38.65      | 9.33       | 42.66      |  |  |  |
| AV   | 11.23092G    | 41.29             | 54.00             | -12.71         | 35.96         | 3           | Vertical  | 158            | 2.50          | -       | 38.66      | 9.34       | 42.67      |  |  |  |
| PK   | 16.83345G    | 57.97             | 68.20             | -10.23         | 47.67         | 3           | Vertical  | 234            | 1.69          | -       | 40.13      | 12.12      | 41.95      |  |  |  |

5.47-5.725GHz\_802.11ax HEW80\_Nss1,(MCS0)\_2TX


5610MHz\_TX

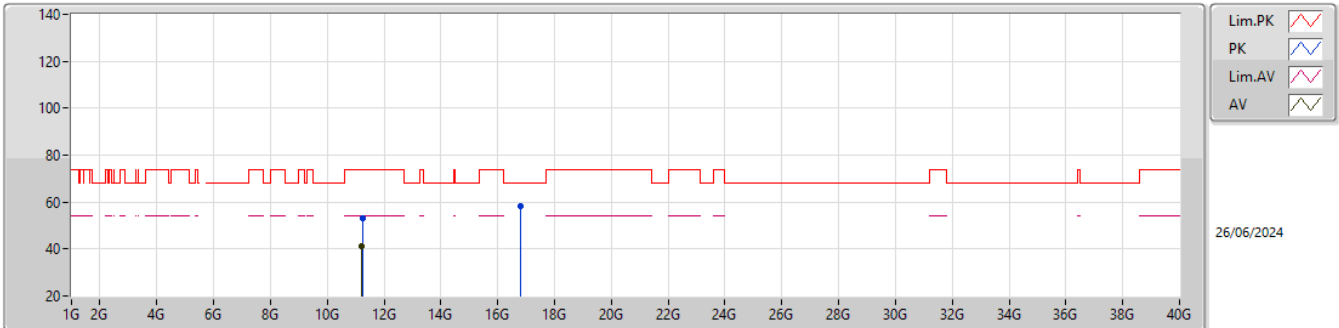EUT\_Y\_2TX  
Setting 60  
04-D-Y-1

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition  | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|------------|----------------|---------------|---------|------------|------------|------------|--|--|--|
| PK   | 11.23242G    | 53.31             | 74.00             | -20.69         | 47.99         | 3           | Horizontal | 210            | 1.62          | -       | 38.66      | 9.34       | 42.68      |  |  |  |
| AV   | 11.21601G    | 41.26             | 54.00             | -12.74         | 35.94         | 3           | Horizontal | 210            | 1.62          | -       | 38.63      | 9.33       | 42.64      |  |  |  |
| PK   | 16.82334G    | 58.33             | 68.20             | -9.87          | 48.06         | 3           | Horizontal | 327            | 2.71          | -       | 40.09      | 12.11      | 41.93      |  |  |  |

5.47-5.725GHz\_802.11ax HEW80\_Nss1,(MCS0)\_2TX

5690MHz Straddle 5.47-5.725GHz\_TX

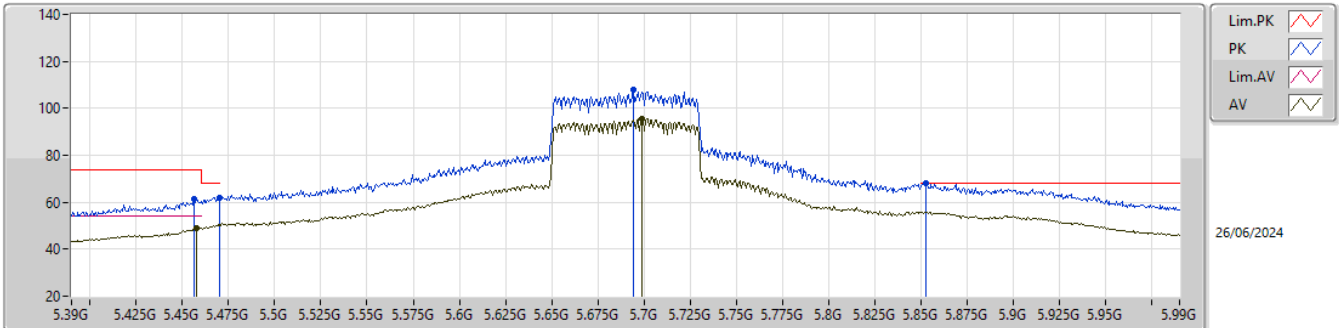


EUT\_Z\_2TX  
Setting 64  
04-D-Y-1-10

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|-----------|----------------|---------------|---------|------------|------------|------------|--|--|--|
| PK   | 5.4566G      | 61.17             | 74.00             | -12.83         | 65.04         | 3           | Vertical  | 0              | 2.14          | -       | 33.34      | 6.15       | 43.36      |  |  |  |
| AV   | 5.4578G      | 49.20             | 54.00             | -4.80          | 53.06         | 3           | Vertical  | 0              | 2.14          | -       | 33.35      | 6.15       | 43.36      |  |  |  |
| PK   | 5.47G        | 62.09             | 68.20             | -6.11          | 65.86         | 3           | Vertical  | 0              | 2.14          | -       | 33.42      | 6.15       | 43.34      |  |  |  |
| PK   | 5.6942G      | 107.79            | Inf               | -Inf           | 110.99        | 3           | Vertical  | 0              | 2.14          | -       | 33.79      | 6.21       | 43.20      |  |  |  |
| AV   | 5.699G       | 95.73             | Inf               | -Inf           | 98.92         | 3           | Vertical  | 0              | 2.14          | -       | 33.80      | 6.21       | 43.20      |  |  |  |
| PK   | 5.8526G      | 67.92             | 68.20             | -0.28          | 70.36         | 3           | Vertical  | 0              | 2.14          | -       | 34.42      | 6.25       | 43.11      |  |  |  |

5.47-5.725GHz\_802.11ax HEW80\_Nss1,(MCS0)\_2TX


5690MHz Straddle 5.47-5.725GHz\_TX

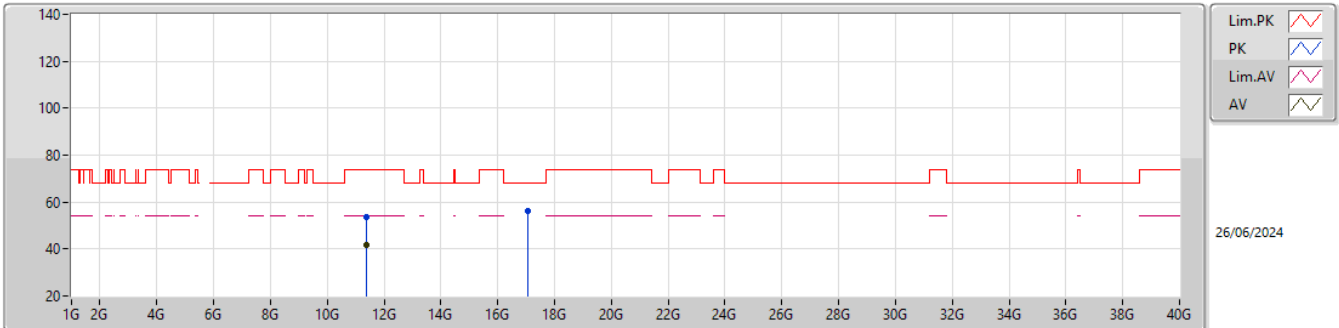EUT\_Y\_2TX  
Setting 64  
04-D-Y-1

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|-----------|----------------|---------------|---------|------------|------------|------------|--|--|--|
| PK   | 11.39365G    | 53.76             | 74.00             | -20.24         | 48.53         | 3           | Vertical  | 156            | 1.54          | -       | 38.80      | 9.42       | 42.99      |  |  |  |
| AV   | 11.39452G    | 41.68             | 54.00             | -12.32         | 36.45         | 3           | Vertical  | 156            | 1.54          | -       | 38.80      | 9.42       | 42.99      |  |  |  |
| PK   | 17.07021G    | 56.27             | 68.20             | -11.93         | 45.42         | 3           | Vertical  | 345            | 1.34          | -       | 40.82      | 12.31      | 42.28      |  |  |  |

5.47-5.725GHz\_802.11ax HEW80\_Nss1,(MCS0)\_2TX

5690MHz Straddle 5.47-5.725GHz\_TX

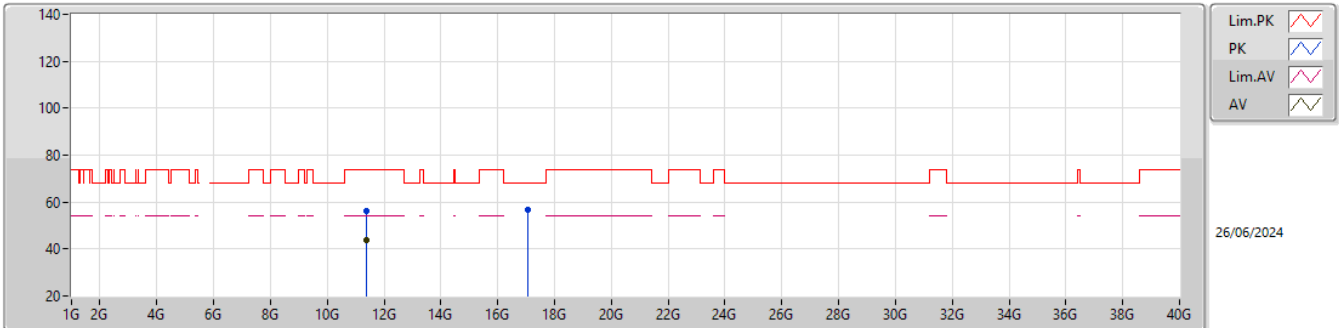


EUT\_Y\_2TX  
Setting 64  
04-D-Y-1

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition  | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|------------|----------------|---------------|---------|------------|------------|------------|--|--|--|
| PK   | 11.37901G    | 56.10             | 74.00             | -17.90         | 50.85         | 3           | Horizontal | 123            | 1.80          | -       | 38.80      | 9.41       | 42.96      |  |  |  |
| AV   | 11.37955G    | 43.88             | 54.00             | -10.12         | 38.63         | 3           | Horizontal | 123            | 1.80          | -       | 38.80      | 9.41       | 42.96      |  |  |  |
| PK   | 17.05752G    | 56.66             | 68.20             | -11.54         | 45.90         | 3           | Horizontal | 211            | 2.15          | -       | 40.75      | 12.30      | 42.29      |  |  |  |

5.725-5.85GHz\_802.11ax HEW80\_Nss1,(MCS0)\_2TX

5775MHz\_TX

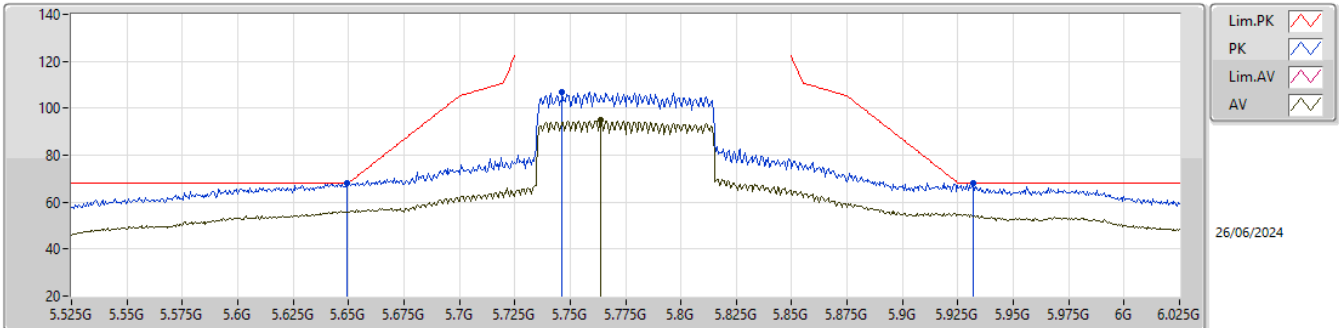


EUT\_Z\_2TX  
Setting 61  
04-D-Y-1-10

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|-----------|----------------|---------------|---------|------------|------------|------------|--|--|--|
| PK   | 5.6495G      | 68.09             | 68.20             | -0.11          | 71.40         | 3           | Vertical  | 2              | 2.22          | -       | 33.70      | 6.22       | 43.23      |  |  |  |
| PK   | 5.7465G      | 106.89            | Inf               | -Inf           | 109.86        | 3           | Vertical  | 2              | 2.22          | -       | 33.99      | 6.21       | 43.17      |  |  |  |
| AV   | 5.764G       | 94.78             | Inf               | -Inf           | 97.68         | 3           | Vertical  | 2              | 2.22          | -       | 34.06      | 6.20       | 43.16      |  |  |  |
| PK   | 5.932G       | 68.08             | 68.20             | -0.12          | 69.94         | 3           | Vertical  | 2              | 2.22          | -       | 34.89      | 6.32       | 43.07      |  |  |  |

5.725-5.85GHz\_802.11ax HEW80\_Nss1,(MCS0)\_2TX


5775MHz\_TX

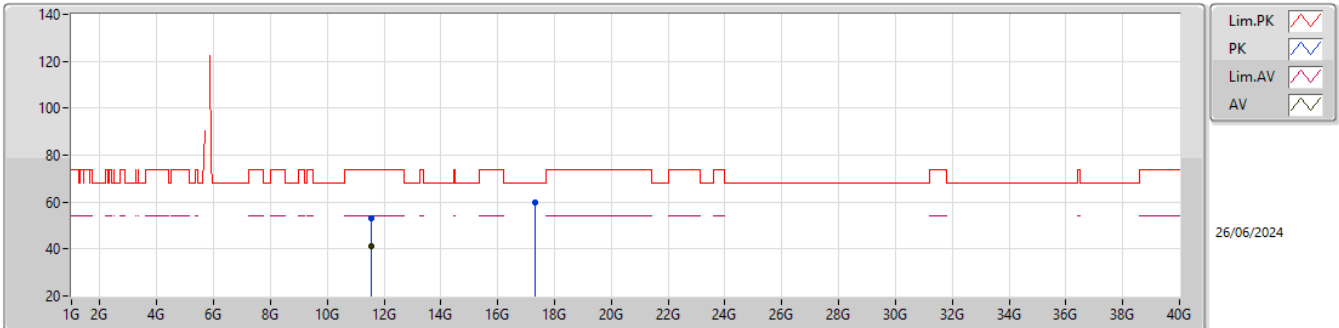EUT\_Y\_2TX  
Setting 61  
04-D-Y-1

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|-----------|----------------|---------------|---------|------------|------------|------------|--|--|--|
| PK   | 11.53725G    | 53.04             | 74.00             | -20.96         | 47.93         | 3           | Vertical  | 229            | 2.88          | -       | 38.80      | 9.49       | 43.18      |  |  |  |
| AV   | 11.55996G    | 41.21             | 54.00             | -12.79         | 36.06         | 3           | Vertical  | 229            | 2.88          | -       | 38.80      | 9.51       | 43.16      |  |  |  |
| PK   | 17.32725G    | 59.59             | 68.20             | -8.61          | 47.68         | 3           | Vertical  | 171            | 1.25          | -       | 41.65      | 12.52      | 42.26      |  |  |  |

5.725-5.85GHz\_802.11ax HEW80\_Nss1,(MCS0)\_2TX

5775MHz\_TX

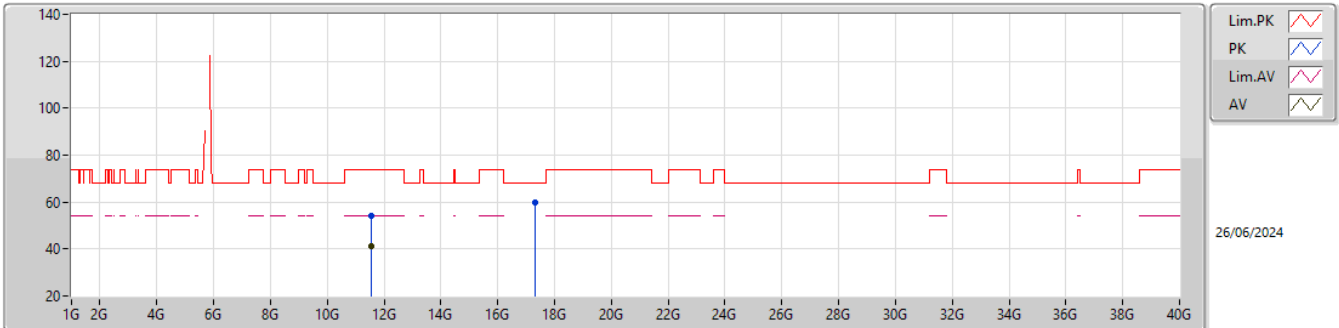EUT\_Y\_2TX  
Setting 61  
04-D-Y-1

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition  | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|------------|----------------|---------------|---------|------------|------------|------------|--|--|--|
| PK   | 11.54976G    | 54.04             | 74.00             | -19.96         | 48.91         | 3           | Horizontal | 176            | 2.64          | -       | 38.80      | 9.50       | 43.17      |  |  |  |
| AV   | 11.56281G    | 41.42             | 54.00             | -12.58         | 36.27         | 3           | Horizontal | 176            | 2.64          | -       | 38.80      | 9.51       | 43.16      |  |  |  |
| PK   | 17.33589G    | 59.64             | 68.20             | -8.56          | 47.70         | 3           | Horizontal | 283            | 1.54          | -       | 41.67      | 12.53      | 42.26      |  |  |  |