



TEST REPORT

No.24T04N001537-009-RF NR

for

Realme Chongqing Mobile Telecommunications Corp., Ltd.

Mobile Phone

Model Name: RMX5011

FCC ID: 2AUYFRMX5011

with

Hardware Version: 11

Software Version: realme UI 6.0

Issued Date: 2024-10-24

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of SAICT.

Test Laboratory:

SAICT, Shenzhen Academy of Information and Communications Technology

Building G, Shenzhen International Innovation Center, No.1006 Shennan Road, Futian District, Shenzhen, Guangdong, P. R. China 518000.

Tel: +86(0)755-33322000, Fax: +86(0)755-33322001

Email: yewu@saict.ac.cn. www.saict.ac.cn

©Copyright. All rights reserved by SAICT.



No.24T04N001537-009-RF NR

REPORT HISTORY

Report Number	Revision	Description	Issue Date
24T04N001537-009-RF NR	Rev.0	1st edition	2024-10-24



CONTENTS

1. SUMMARY OF TEST REPORT	4
1.1. TEST ITEMS.....	4
1.2. TEST STANDARDS	4
1.3. TEST RESULT	4
1.4. TESTING LOCATION.....	4
1.5. PROJECT DATA	4
1.6. SIGNATURE	4
2. CLIENT INFORMATION	5
2.1. APPLICANT INFORMATION	5
2.2. MANUFACTURER INFORMATION	5
3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE)	6
3.1. ABOUT EUT	6
3.2. INTERNAL IDENTIFICATION OF EUT	6
3.3. INTERNAL IDENTIFICATION OF AE.....	6
3.4. GENERAL DESCRIPTION	7
4. REFERENCE DOCUMENTS.....	8
5. LABORATORY ENVIRONMENT.....	9
6. SUMMARY OF TEST RESULTS	10
7. STATEMENT	12
8. TEST EQUIPMENTS UTILIZED.....	13
ANNEX A: MEASUREMENT RESULTS	14
A.1 OUTPUT POWER.....	14
A.2 FIELD STRENGTH OF SPURIOUS RADIATION	299
A.3 FREQUENCY STABILITY	329
A.4 OCCUPIED BANDWIDTH.....	333
A.5 EMISSION BANDWIDTH	484
A.6 BAND EDGE COMPLIANCE.....	635
A.7 CONDUCTED SPURIOUS EMISSION	648
A.8 PEAK-TO-AVERAGE POWER RATIO	652
ANNEX B: ACCREDITATION CERTIFICATE	902
ANNEX C: CERTIFICATE OF BRAND AUTHORIZATION.....	903



1. SUMMARY OF TEST REPORT

1.1. Test Items

Description	Mobile Phone
Model Name	RMX5011
Brand Name	realme
Applicant's name	Realme Chongqing Mobile Telecommunications Corp., Ltd.
Manufacturer's Name	Realme Chongqing Mobile Telecommunications Corp., Ltd.

1.2. Test Standards

FCC Part 2/22/24/27	10-1-23 Edition
ANSI C63.26	2015
KDB971168 D01	v03r01

1.3. Test Result

All test items are pass. Please refer to "6 Summary of Test Results" for detail.

1.4. Testing Location

Address: Building G, Shenzhen International Innovation Center, No.1006 Shennan Road, Futian District, Shenzhen, Guangdong, P. R. China 518000

1.5. Project Data

Testing Start Date: 2024-08-07

Testing End Date: 2024-10-10

1.6. Signature

Wang Ping
(Prepared this test report)

Huang Qiubin
(Reviewed this test report)

Zhang Hao
(Approved this test report)



2. CLIENT INFORMATION

2.1. Applicant Information

Company Name: Realme Chongqing Mobile Telecommunications Corp., Ltd.
Address /Post: No.178 Yulong Avenue,Yufengshan,Yubei District,Chongqing,China
Contact: HuangMinJiang
Email: mega@realme.com
Telephone: (86)18502096102
Fax: /

2.2. Manufacturer Information

Company Name: Realme Chongqing Mobile Telecommunications Corp., Ltd.
Address /Post: No.178 Yulong Avenue,Yufengshan,Yubei District,Chongqing,China
Contact: HuangMinJiang
Email: mega@realme.com
Telephone: (86)18502096102
Fax: /



3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT

(AE)

3.1. About EUT

Description	Mobile Phone
Model Name	RMX5011
FCC ID	2AUYFRMX5011
NR Bands	n2/n5/n7/n38/n41/n66
EN-DC Bands	DC_7A-n2A/DC_66A-n2A/DC_7A-n5A/DC_66A-n5A/ C_2A-n7A/DC_4A-n7A/DC_5A-n7A/DC_66A-n7A/DC_4A-n3 8A/DC_5A-n38A/DC_66A-n38A/DC_4A-n41A/DC_26A-n41A/ DC_66A-n41A//DC_2A-n66A/DC_5A-n66A/DC_7A-n66A/DC _12A-n66A
Antenna	PIFA
Extreme vol. Limits	5.30V to 9.16V (nominal: 7.70V)
Extreme temp. Tolerance	-30°C to +50°C
Condition of EUT as received	No abnormality in appearance

Note: Components list, please refer to documents of the manufacturer; it is also included in the original test record of SAICT.

3.2. Internal Identification of EUT

EUT ID*	SN or IMEI	HW Version	SW Version	Date of receipt
UT02aa	866186070019955	11	realme UI 6.0	2024-08-07
	866186070019947			
UT09aa	866186070019716	11	realme UI 6.0	2024-08-07
	866186070019708			

*EUT ID: is used to identify the test sample in the lab internally.

UT01aa are used for conduction test, UT05aa is used for radiation test.

3.3. Internal Identification of AE

AE ID*	Description
AE1	Battery
AE2	Charger
AE3	USB Cable
AE1	
Model	BLPB33
Manufacturer	Sunwoda Electronic CO.,LTD.
Capacity	3155mAh
Nominal Voltage	7.64V
AE2	
Model	VCBBOAUH
Manufacturer	Huizhou Golden Lake Industrial Co., Ltd.
Specification	American Standard Charger



No.24T04N001537-009-RF NR

AE3

Model DL153

Manufacturer /

*AE ID: is used to identify the test sample in the lab internally.

AE: ancillary equipment

3.4. General Description

The Equipment Under Test (EUT) is a model RMX5011 with PIFA antenna. It consists of normal options: lithium battery, charger. Manual and specifications of the EUT were provided to fulfil the test. Samples undergoing test were selected by the Client.



4. REFERENCE DOCUMENTS

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part 22	PUBLIC MOBILE SERVICES	10-1-23 Edition
FCC Part 2	FREQUENCY ALLOCATIONS AND RADIO TREATY MATTERS; GENERAL RULES AND REGULATIONS	10-1-23 Edition
FCC Part 24	PERSONAL COMMUNICATIONS SERVICES	10-1-23 Edition
FCC Part 27	MISCELLANEOUS WIRELESS COMMUNICATIONS SERVICES	10-1-23 Edition
ANSI C63.26	American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services	2015
KDB971168 D01	Power Meas License Digital Systems	v03r01



5. LABORATORY ENVIRONMENT

Shielded room did not exceed following limits along the RF testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 20 %, Max. = 75 %
Shielding effectiveness	0.014MHz-1MHz>60 dB; 1MHz-18000MHz>90 dB
Electrical insulation	>2 MΩ
Ground system resistance	< 4 Ω

Fully-anechoic chamber did not exceed following limits along the EMC testing

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 20 %, Max. = 75 %
Shielding effectiveness	0.014MHz-1MHz> 60 dB; 1MHz-18000MHz>90 dB
Electrical insulation	> 2MΩ
Ground system resistance	< 4 Ω
Voltage Standing Wave Ratio (VSWR)	≤ 6 dB, from 1 to 18 GHz, 3 m distance
Uniformity of field strength	Between 0 and 6 dB, from 80 to 6000 MHz

**6. SUMMARY OF TEST RESULTS**

Abbreviations used in this clause:		
Verdict Column	P	Pass
	F	Fail
	NA	Not applicable
	NM	Not measured

n2

Items	Test Name	Clause in FCC rules	Section in this report	Verdict
1	Output Power	2.1046/24.232	A.1	P
2	Field Strength of Spurious Radiation	2.1053/24.238	A.2	P
3	Frequency Stability	2.1055/24.235	A.3	P
4	Occupied Bandwidth	2.1049/24.238	A.4	P
5	Emission Bandwidth	2.1049/24.238	A.5	P
6	Band Edge Compliance	2.1051/24.238	A.6	P
7	Conducted Spurious Emission	2.1051/24.238	A.7	P
8	Peak-to-Average Power Ratio	24.232/KDB971168 D01	A.8	P

n5

Items	Test Name	Clause in FCC rules	Section in this report	Verdict
1	Output Power	2.1046/22.913	A.1	P
2	Field Strength of Spurious Radiation	2.1053/22.917	A.2	P
3	Frequency Stability	2.1055/22.355	A.3	P
4	Occupied Bandwidth	2.1049/22.917	A.4	P
5	Emission Bandwidth	2.1049/22.917	A.4	P
6	Band Edge Compliance	2.1051/22.917	A.5	P
7	Conducted Spurious Emission	2.1051/22.917	A.6	P
8	Peak-to-Average Power Ratio	KDB971168 D01	A.7	P

n7

Items	Test Name	Clause in FCC rules	Section in this report	Verdict
1	Output Power	2.1046/27.50(h)	A.1	P
2	Field Strength of Spurious Radiation	2.1053/27.53(m)	A.2	P
3	Frequency Stability	2.1055/27.54	A.3	P
4	Occupied Bandwidth	2.1049/27.53(m)	A.4	P
5	Emission Bandwidth	2.1049/27.53(m)	A.4	P
6	Band Edge Compliance	2.1051/27.53(m)	A.5	P
7	Conducted Spurious Emission	2.1051/27.53(m)	A.6	P
8	Peak-to-Average Power Ratio	27.50(a)/ KDB971168 D01	A.7	P



n38

Items	Test Name	Clause in FCC rules	Section in this report	Verdict
1	Output Power	2.1046/27.50(h)	A.1	P
2	Field Strength of Spurious Radiation	2.1053/27.53(m)	A.2	P
3	Frequency Stability	2.1055/27.54	A.3	P
4	Occupied Bandwidth	2.1049/27.53(m)	A.4	P
5	Emission Bandwidth	2.1049/27.53(m)	A.4	P
6	Band Edge Compliance	2.1051/27.53(m)	A.5	P
7	Conducted Spurious Emission	2.1051/27.53(m)	A.6	P
8	Peak-to-Average Power Ratio	27.50(a)/ KDB971168 D01	A.7	P

n41

Items	Test Name	Clause in FCC rules	Section in this report	Verdict
1	Output Power	2.1046/27.50(h)	A.1	P
2	Field Strength of Spurious Radiation	2.1053/27.53(m)	A.2	P
3	Frequency Stability	2.1055/27.54	A.3	P
4	Occupied Bandwidth	2.1049/27.53(m)	A.4	P
5	Emission Bandwidth	2.1049/27.53(m)	A.4	P
6	Band Edge Compliance	2.1051/27.53(m)	A.5	P
7	Conducted Spurious Emission	2.1051/27.53(m)	A.6	P
8	Peak-to-Average Power Ratio	27.50(a)/ KDB971168 D01	A.7	P

n66

Items	Test Name	Clause in FCC rules	Section in this report	Verdict
1	Output Power	2.1046/27.50(d)	A.1	P
2	Field Strength of Spurious Radiation	2.1053/27.53(h)	A.2	P
3	Frequency Stability	2.1055/27.54	A.3	P
4	Occupied Bandwidth	2.1049/27.53(h)	A.4	P
5	Emission Bandwidth	2.1049/27.53(h)	A.4	P
6	Band Edge Compliance	2.1051/27.53(h)	A.5	P
7	Conducted Spurious Emission	2.1051/27.53(h)	A.6	P
8	Peak-to-Average Power Ratio	27.50(a)/ KDB971168 D01	A.7	P



No.24T04N001537-009-RF NR

7. STATEMENT

Since the information of samples in this report is provided by the client, the laboratory is not responsible for the authenticity of sample information.

This report takes measured values as criterion of test conclusion. The test conclusion meets the limit requirements.

8. TEST EQUIPMENTS UTILIZED

No.	Description	Type	Manufacture	Series Number	Cal Due Date
1	Test Receiver	ESR7	R&S	101676	2024-11-22
2	Hybrid antenna	VULB 9163	Schwarzbeck	330	2027-04-21
3	Horn Antenna	3117	ETS-Lindgren	00066577	2025-04-17
4	Horn Antenna	QSH-SL-18-2 6-S-20	Q-par	17013	2026-02-01
5	Antenna	BBHA 9120D	Schwarzbeck	1593	2025-10-24
6	Antenna	QWH-SL-18-4 0-K-SG	Q-par	15979	2026-01-30
7	preamplifier	83017A	Agilent	MY39501110	/
8	Signal Generator	SMB100A	R&S	179725	2024-11-22
9	Fully Anechoic Chamber	FACT3-2.0	ETS-Lindgren	1285	2025-05-28
10	Spectrum Analyzer	FSV40	R&S	101192	2025-01-10
11	Universal Radio Communication Tester	CMU200	R&S	114545	2025-01-10
12	Universal Radio Communication Tester	CMW500	R&S	168719	2025-03-22
13	Power Supply	HMC8042	R&S	103284	2025-05-07
14	Universal Radio Communication Tester	CMW500	R&S	129146	2025-04-10
15	Spectrum Analyzer	FSW26	R&S	102197	2025-05-07
16	Temperature Chamber	SH-241	ESPEC	92007516	2025-05-07
17	Universal Radio Communication Tester	MT8821C	Anritsu	6272459665	2024/10/11
18	Universal Radio Communication Tester	MT8000A	Anritsu	6272478348	2024/10/11

Test software

Item	Name	Version
Radiated	EMC32	V10.50.40

ANNEX A: MEASUREMENT RESULTS

A.1 OUTPUT POWER

A.1.1 Summary

During the process of testing, the EUT was controlled via Universal Radio Communication Tester to ensure max power transmission and proper modulation.

This result contains peak output power and ERP/EIRP measurements for the EUT.

In all cases, output power is within the specified limits.

A.1.2 Conducted

A.1.2.1 Method of Measurements

The EUT was set up for the max output power with pseudo random data modulation.

These measurements were done at 3 frequencies (bottom, middle and top of operational frequency range) for each bandwidth.

A.1.2.2 Measurement result

SA

n2

BAND	BW(MHz)	SCS(kHz)	FREQ(MHz)	OFDM	MODULATION	RB LOCATION	POWER(dBm)
n2	5	15	1852.5	DFT	QPSK	Inner_Full	22.96
n2	5	15	1852.5	DFT	QPSK	Edge_1RB_Left	22.15
n2	5	15	1852.5	DFT	QPSK	Edge_1RB_Right	22.07
n2	5	15	1852.5	DFT	QPSK	Outer_Full	22.56
n2	5	15	1852.5	DFT	16QAM	Inner_Full	22.66
n2	5	15	1852.5	DFT	16QAM	Edge_1RB_Left	21.30
n2	5	15	1852.5	DFT	16QAM	Edge_1RB_Right	22.18
n2	5	15	1852.5	DFT	16QAM	Outer_Full	21.58
n2	5	15	1852.5	DFT	64QAM	Inner_Full	21.08
n2	5	15	1852.5	DFT	64QAM	Edge_1RB_Left	20.69
n2	5	15	1852.5	DFT	64QAM	Edge_1RB_Right	21.49
n2	5	15	1852.5	DFT	64QAM	Outer_Full	21.07
n2	5	15	1852.5	DFT	256QAM	Inner_Full	19.61
n2	5	15	1852.5	DFT	256QAM	Edge_1RB_Left	19.14
n2	5	15	1852.5	DFT	256QAM	Edge_1RB_Right	19.73
n2	5	15	1852.5	DFT	256QAM	Outer_Full	19.66
n2	5	15	1852.5	CP	QPSK	Inner_Full	22.10
n2	5	15	1852.5	CP	QPSK	Edge_1RB_Left	20.65
n2	5	15	1852.5	CP	QPSK	Edge_1RB_Right	21.42
n2	5	15	1852.5	CP	QPSK	Outer_Full	21.04
n2	5	15	1852.5	CP	16QAM	Inner_Full	21.63
n2	5	15	1852.5	CP	16QAM	Edge_1RB_Left	20.63
n2	5	15	1852.5	CP	16QAM	Edge_1RB_Right	21.44
n2	5	15	1852.5	CP	16QAM	Outer_Full	21.02
n2	5	15	1852.5	CP	64QAM	Inner_Full	21.05



BAND	BW(MHz)	SCS(kHz)	FREQ(MHz)	OFDM	MODULATION	RB LOCATION	POWER(dBm)
n2	5	15	1852.5	CP	64QAM	Edge_1RB_Left	20.77
n2	5	15	1852.5	CP	64QAM	Edge_1RB_Right	21.47
n2	5	15	1852.5	CP	64QAM	Outer_Full	21.05
n2	5	15	1852.5	CP	256QAM	Inner_Full	18.65
n2	5	15	1852.5	CP	256QAM	Edge_1RB_Left	17.93
n2	5	15	1852.5	CP	256QAM	Edge_1RB_Right	19.14
n2	5	15	1852.5	CP	256QAM	Outer_Full	18.51
n2	5	15	1880	DFT	QPSK	Inner_Full	23.02
n2	5	15	1880	DFT	QPSK	Edge_1RB_Left	22.11
n2	5	15	1880	DFT	QPSK	Edge_1RB_Right	22.07
n2	5	15	1880	DFT	QPSK	Outer_Full	22.89
n2	5	15	1880	DFT	16QAM	Inner_Full	22.90
n2	5	15	1880	DFT	16QAM	Edge_1RB_Left	22.68
n2	5	15	1880	DFT	16QAM	Edge_1RB_Right	21.81
n2	5	15	1880	DFT	16QAM	Outer_Full	22.27
n2	5	15	1880	DFT	64QAM	Inner_Full	22.00
n2	5	15	1880	DFT	64QAM	Edge_1RB_Left	21.79
n2	5	15	1880	DFT	64QAM	Edge_1RB_Right	21.37
n2	5	15	1880	DFT	64QAM	Outer_Full	21.91
n2	5	15	1880	DFT	256QAM	Inner_Full	20.44
n2	5	15	1880	DFT	256QAM	Edge_1RB_Left	20.20
n2	5	15	1880	DFT	256QAM	Edge_1RB_Right	19.73
n2	5	15	1880	DFT	256QAM	Outer_Full	20.27
n2	5	15	1880	CP	QPSK	Inner_Full	22.81
n2	5	15	1880	CP	QPSK	Edge_1RB_Left	21.99
n2	5	15	1880	CP	QPSK	Edge_1RB_Right	21.60
n2	5	15	1880	CP	QPSK	Outer_Full	21.73
n2	5	15	1880	CP	16QAM	Inner_Full	22.53
n2	5	15	1880	CP	16QAM	Edge_1RB_Left	21.83
n2	5	15	1880	CP	16QAM	Edge_1RB_Right	21.94
n2	5	15	1880	CP	16QAM	Outer_Full	21.70
n2	5	15	1880	CP	64QAM	Inner_Full	21.86
n2	5	15	1880	CP	64QAM	Edge_1RB_Left	21.72
n2	5	15	1880	CP	64QAM	Edge_1RB_Right	21.37
n2	5	15	1880	CP	64QAM	Outer_Full	21.82
n2	5	15	1880	CP	256QAM	Inner_Full	19.52
n2	5	15	1880	CP	256QAM	Edge_1RB_Left	19.24
n2	5	15	1880	CP	256QAM	Edge_1RB_Right	18.84
n2	5	15	1880	CP	256QAM	Outer_Full	19.35
n2	5	15	1907.5	DFT	QPSK	Inner_Full	23.01
n2	5	15	1907.5	DFT	QPSK	Edge_1RB_Left	22.19



BAND	BW(MHz)	SCS(kHz)	FREQ(MHz)	OFDM	MODULATION	RB LOCATION	POWER(dBm)
n2	5	15	1907.5	DFT	QPSK	Edge_1RB_Right	22.09
n2	5	15	1907.5	DFT	QPSK	Outer_Full	22.64
n2	5	15	1907.5	DFT	16QAM	Inner_Full	22.72
n2	5	15	1907.5	DFT	16QAM	Edge_1RB_Left	22.27
n2	5	15	1907.5	DFT	16QAM	Edge_1RB_Right	21.65
n2	5	15	1907.5	DFT	16QAM	Outer_Full	21.71
n2	5	15	1907.5	DFT	64QAM	Inner_Full	21.50
n2	5	15	1907.5	DFT	64QAM	Edge_1RB_Left	21.33
n2	5	15	1907.5	DFT	64QAM	Edge_1RB_Right	20.76
n2	5	15	1907.5	DFT	64QAM	Outer_Full	21.37
n2	5	15	1907.5	DFT	256QAM	Inner_Full	19.96
n2	5	15	1907.5	DFT	256QAM	Edge_1RB_Left	19.78
n2	5	15	1907.5	DFT	256QAM	Edge_1RB_Right	19.20
n2	5	15	1907.5	DFT	256QAM	Outer_Full	19.71
n2	5	15	1907.5	CP	QPSK	Inner_Full	22.34
n2	5	15	1907.5	CP	QPSK	Edge_1RB_Left	21.55
n2	5	15	1907.5	CP	QPSK	Edge_1RB_Right	20.96
n2	5	15	1907.5	CP	QPSK	Outer_Full	21.18
n2	5	15	1907.5	CP	16QAM	Inner_Full	21.96
n2	5	15	1907.5	CP	16QAM	Edge_1RB_Left	21.83
n2	5	15	1907.5	CP	16QAM	Edge_1RB_Right	21.22
n2	5	15	1907.5	CP	16QAM	Outer_Full	21.20
n2	5	15	1907.5	CP	64QAM	Inner_Full	21.31
n2	5	15	1907.5	CP	64QAM	Edge_1RB_Left	21.27
n2	5	15	1907.5	CP	64QAM	Edge_1RB_Right	20.63
n2	5	15	1907.5	CP	64QAM	Outer_Full	21.28
n2	5	15	1907.5	CP	256QAM	Inner_Full	18.96
n2	5	15	1907.5	CP	256QAM	Edge_1RB_Left	18.79
n2	5	15	1907.5	CP	256QAM	Edge_1RB_Right	18.24
n2	5	15	1907.5	CP	256QAM	Outer_Full	18.80
n2	10	15	1855	DFT	QPSK	Inner_Full	23.00
n2	10	15	1855	DFT	QPSK	Edge_1RB_Left	22.00
n2	10	15	1855	DFT	QPSK	Edge_1RB_Right	22.07
n2	10	15	1855	DFT	QPSK	Outer_Full	22.80
n2	10	15	1855	DFT	16QAM	Inner_Full	22.89
n2	10	15	1855	DFT	16QAM	Edge_1RB_Left	21.41
n2	10	15	1855	DFT	16QAM	Edge_1RB_Right	23.04
n2	10	15	1855	DFT	16QAM	Outer_Full	21.89
n2	10	15	1855	DFT	64QAM	Inner_Full	21.72
n2	10	15	1855	DFT	64QAM	Edge_1RB_Left	20.47
n2	10	15	1855	DFT	64QAM	Edge_1RB_Right	22.66



BAND	BW(MHz)	SCS(kHz)	FREQ(MHz)	OFDM	MODULATION	RB LOCATION	POWER(dBm)
n2	10	15	1855	DFT	64QAM	Outer_Full	21.43
n2	10	15	1855	DFT	256QAM	Inner_Full	20.06
n2	10	15	1855	DFT	256QAM	Edge_1RB_Left	18.79
n2	10	15	1855	DFT	256QAM	Edge_1RB_Right	21.16
n2	10	15	1855	DFT	256QAM	Outer_Full	19.92
n2	10	15	1855	CP	QPSK	Inner_Full	22.66
n2	10	15	1855	CP	QPSK	Edge_1RB_Left	20.62
n2	10	15	1855	CP	QPSK	Edge_1RB_Right	22.81
n2	10	15	1855	CP	QPSK	Outer_Full	21.43
n2	10	15	1855	CP	16QAM	Inner_Full	22.03
n2	10	15	1855	CP	16QAM	Edge_1RB_Left	20.96
n2	10	15	1855	CP	16QAM	Edge_1RB_Right	23.23
n2	10	15	1855	CP	16QAM	Outer_Full	21.43
n2	10	15	1855	CP	64QAM	Inner_Full	21.63
n2	10	15	1855	CP	64QAM	Edge_1RB_Left	20.35
n2	10	15	1855	CP	64QAM	Edge_1RB_Right	22.54
n2	10	15	1855	CP	64QAM	Outer_Full	21.50
n2	10	15	1855	CP	256QAM	Inner_Full	19.03
n2	10	15	1855	CP	256QAM	Edge_1RB_Left	17.85
n2	10	15	1855	CP	256QAM	Edge_1RB_Right	20.34
n2	10	15	1855	CP	256QAM	Outer_Full	18.86
n2	10	15	1880	DFT	QPSK	Inner_Full	23.00
n2	10	15	1880	DFT	QPSK	Edge_1RB_Left	22.11
n2	10	15	1880	DFT	QPSK	Edge_1RB_Right	22.11
n2	10	15	1880	DFT	QPSK	Outer_Full	22.84
n2	10	15	1880	DFT	16QAM	Inner_Full	22.79
n2	10	15	1880	DFT	16QAM	Edge_1RB_Left	22.78
n2	10	15	1880	DFT	16QAM	Edge_1RB_Right	22.14
n2	10	15	1880	DFT	16QAM	Outer_Full	22.15
n2	10	15	1880	DFT	64QAM	Inner_Full	22.01
n2	10	15	1880	DFT	64QAM	Edge_1RB_Left	21.98
n2	10	15	1880	DFT	64QAM	Edge_1RB_Right	21.22
n2	10	15	1880	DFT	64QAM	Outer_Full	21.72
n2	10	15	1880	DFT	256QAM	Inner_Full	20.37
n2	10	15	1880	DFT	256QAM	Edge_1RB_Left	20.37
n2	10	15	1880	DFT	256QAM	Edge_1RB_Right	19.53
n2	10	15	1880	DFT	256QAM	Outer_Full	20.29
n2	10	15	1880	CP	QPSK	Inner_Full	22.71
n2	10	15	1880	CP	QPSK	Edge_1RB_Left	22.16
n2	10	15	1880	CP	QPSK	Edge_1RB_Right	21.48
n2	10	15	1880	CP	QPSK	Outer_Full	21.67



BAND	BW(MHz)	SCS(kHz)	FREQ(MHz)	OFDM	MODULATION	RB LOCATION	POWER(dBm)
n2	10	15	1880	CP	16QAM	Inner_Full	22.40
n2	10	15	1880	CP	16QAM	Edge_1RB_Left	22.43
n2	10	15	1880	CP	16QAM	Edge_1RB_Right	21.78
n2	10	15	1880	CP	16QAM	Outer_Full	21.70
n2	10	15	1880	CP	64QAM	Inner_Full	21.89
n2	10	15	1880	CP	64QAM	Edge_1RB_Left	21.82
n2	10	15	1880	CP	64QAM	Edge_1RB_Right	21.15
n2	10	15	1880	CP	64QAM	Outer_Full	21.78
n2	10	15	1880	CP	256QAM	Inner_Full	19.46
n2	10	15	1880	CP	256QAM	Edge_1RB_Left	19.45
n2	10	15	1880	CP	256QAM	Edge_1RB_Right	18.68
n2	10	15	1880	CP	256QAM	Outer_Full	19.26
n2	10	15	1905	DFT	QPSK	Inner_Full	23.07
n2	10	15	1905	DFT	QPSK	Edge_1RB_Left	22.10
n2	10	15	1905	DFT	QPSK	Edge_1RB_Right	22.10
n2	10	15	1905	DFT	QPSK	Outer_Full	22.67
n2	10	15	1905	DFT	16QAM	Inner_Full	22.82
n2	10	15	1905	DFT	16QAM	Edge_1RB_Left	22.47
n2	10	15	1905	DFT	16QAM	Edge_1RB_Right	21.81
n2	10	15	1905	DFT	16QAM	Outer_Full	21.82
n2	10	15	1905	DFT	64QAM	Inner_Full	21.78
n2	10	15	1905	DFT	64QAM	Edge_1RB_Left	21.62
n2	10	15	1905	DFT	64QAM	Edge_1RB_Right	20.98
n2	10	15	1905	DFT	64QAM	Outer_Full	21.38
n2	10	15	1905	DFT	256QAM	Inner_Full	20.19
n2	10	15	1905	DFT	256QAM	Edge_1RB_Left	19.80
n2	10	15	1905	DFT	256QAM	Edge_1RB_Right	19.10
n2	10	15	1905	DFT	256QAM	Outer_Full	19.93
n2	10	15	1905	CP	QPSK	Inner_Full	22.63
n2	10	15	1905	CP	QPSK	Edge_1RB_Left	21.73
n2	10	15	1905	CP	QPSK	Edge_1RB_Right	21.11
n2	10	15	1905	CP	QPSK	Outer_Full	21.37
n2	10	15	1905	CP	16QAM	Inner_Full	22.11
n2	10	15	1905	CP	16QAM	Edge_1RB_Left	22.02
n2	10	15	1905	CP	16QAM	Edge_1RB_Right	21.40
n2	10	15	1905	CP	16QAM	Outer_Full	21.36
n2	10	15	1905	CP	64QAM	Inner_Full	21.70
n2	10	15	1905	CP	64QAM	Edge_1RB_Left	21.44
n2	10	15	1905	CP	64QAM	Edge_1RB_Right	20.86
n2	10	15	1905	CP	64QAM	Outer_Full	21.42
n2	10	15	1905	CP	256QAM	Inner_Full	19.22



BAND	BW(MHz)	SCS(kHz)	FREQ(MHz)	OFDM	MODULATION	RB LOCATION	POWER(dBm)
n2	10	15	1905	CP	256QAM	Edge_1RB_Left	18.92
n2	10	15	1905	CP	256QAM	Edge_1RB_Right	18.26
n2	10	15	1905	CP	256QAM	Outer_Full	18.95
n2	15	15	1857.5	DFT	QPSK	Inner_Full	23.04
n2	15	15	1857.5	DFT	QPSK	Edge_1RB_Left	21.87
n2	15	15	1857.5	DFT	QPSK	Edge_1RB_Right	22.13
n2	15	15	1857.5	DFT	QPSK	Outer_Full	22.99
n2	15	15	1857.5	DFT	16QAM	Inner_Full	22.67
n2	15	15	1857.5	DFT	16QAM	Edge_1RB_Left	21.02
n2	15	15	1857.5	DFT	16QAM	Edge_1RB_Right	23.03
n2	15	15	1857.5	DFT	16QAM	Outer_Full	22.29
n2	15	15	1857.5	DFT	64QAM	Inner_Full	21.87
n2	15	15	1857.5	DFT	64QAM	Edge_1RB_Left	20.25
n2	15	15	1857.5	DFT	64QAM	Edge_1RB_Right	22.71
n2	15	15	1857.5	DFT	64QAM	Outer_Full	21.72
n2	15	15	1857.5	DFT	256QAM	Inner_Full	20.46
n2	15	15	1857.5	DFT	256QAM	Edge_1RB_Left	18.49
n2	15	15	1857.5	DFT	256QAM	Edge_1RB_Right	21.31
n2	15	15	1857.5	DFT	256QAM	Outer_Full	20.15
n2	15	15	1857.5	CP	QPSK	Inner_Full	22.83
n2	15	15	1857.5	CP	QPSK	Edge_1RB_Left	20.20
n2	15	15	1857.5	CP	QPSK	Edge_1RB_Right	22.84
n2	15	15	1857.5	CP	QPSK	Outer_Full	21.76
n2	15	15	1857.5	CP	16QAM	Inner_Full	22.38
n2	15	15	1857.5	CP	16QAM	Edge_1RB_Left	20.55
n2	15	15	1857.5	CP	16QAM	Edge_1RB_Right	23.27
n2	15	15	1857.5	CP	16QAM	Outer_Full	21.73
n2	15	15	1857.5	CP	64QAM	Inner_Full	22.35
n2	15	15	1857.5	CP	64QAM	Edge_1RB_Left	19.89
n2	15	15	1857.5	CP	64QAM	Edge_1RB_Right	22.49
n2	15	15	1857.5	CP	64QAM	Outer_Full	21.71
n2	15	15	1857.5	CP	256QAM	Inner_Full	19.43
n2	15	15	1857.5	CP	256QAM	Edge_1RB_Left	17.38
n2	15	15	1857.5	CP	256QAM	Edge_1RB_Right	20.33
n2	15	15	1857.5	CP	256QAM	Outer_Full	19.18
n2	15	15	1880	DFT	QPSK	Inner_Full	23.06
n2	15	15	1880	DFT	QPSK	Edge_1RB_Left	22.19
n2	15	15	1880	DFT	QPSK	Edge_1RB_Right	22.19
n2	15	15	1880	DFT	QPSK	Outer_Full	22.87
n2	15	15	1880	DFT	16QAM	Inner_Full	22.80
n2	15	15	1880	DFT	16QAM	Edge_1RB_Left	23.05



BAND	BW(MHz)	SCS(kHz)	FREQ(MHz)	OFDM	MODULATION	RB LOCATION	POWER(dBm)
n2	15	15	1880	DFT	16QAM	Edge_1RB_Right	22.13
n2	15	15	1880	DFT	16QAM	Outer_Full	22.28
n2	15	15	1880	DFT	64QAM	Inner_Full	22.02
n2	15	15	1880	DFT	64QAM	Edge_1RB_Left	22.25
n2	15	15	1880	DFT	64QAM	Edge_1RB_Right	21.30
n2	15	15	1880	DFT	64QAM	Outer_Full	21.88
n2	15	15	1880	DFT	256QAM	Inner_Full	20.47
n2	15	15	1880	DFT	256QAM	Edge_1RB_Left	20.71
n2	15	15	1880	DFT	256QAM	Edge_1RB_Right	19.52
n2	15	15	1880	DFT	256QAM	Outer_Full	20.36
n2	15	15	1880	CP	QPSK	Inner_Full	22.75
n2	15	15	1880	CP	QPSK	Edge_1RB_Left	22.38
n2	15	15	1880	CP	QPSK	Edge_1RB_Right	21.33
n2	15	15	1880	CP	QPSK	Outer_Full	21.82
n2	15	15	1880	CP	16QAM	Inner_Full	22.31
n2	15	15	1880	CP	16QAM	Edge_1RB_Left	22.76
n2	15	15	1880	CP	16QAM	Edge_1RB_Right	21.76
n2	15	15	1880	CP	16QAM	Outer_Full	21.79
n2	15	15	1880	CP	64QAM	Inner_Full	21.75
n2	15	15	1880	CP	64QAM	Edge_1RB_Left	22.17
n2	15	15	1880	CP	64QAM	Edge_1RB_Right	21.14
n2	15	15	1880	CP	64QAM	Outer_Full	21.82
n2	15	15	1880	CP	256QAM	Inner_Full	19.52
n2	15	15	1880	CP	256QAM	Edge_1RB_Left	19.78
n2	15	15	1880	CP	256QAM	Edge_1RB_Right	18.60
n2	15	15	1880	CP	256QAM	Outer_Full	19.34
n2	15	15	1902.5	DFT	QPSK	Inner_Full	23.03
n2	15	15	1902.5	DFT	QPSK	Edge_1RB_Left	22.18
n2	15	15	1902.5	DFT	QPSK	Edge_1RB_Right	22.18
n2	15	15	1902.5	DFT	QPSK	Outer_Full	22.76
n2	15	15	1902.5	DFT	16QAM	Inner_Full	22.71
n2	15	15	1902.5	DFT	16QAM	Edge_1RB_Left	22.31
n2	15	15	1902.5	DFT	16QAM	Edge_1RB_Right	21.94
n2	15	15	1902.5	DFT	16QAM	Outer_Full	21.97
n2	15	15	1902.5	DFT	64QAM	Inner_Full	21.85
n2	15	15	1902.5	DFT	64QAM	Edge_1RB_Left	21.42
n2	15	15	1902.5	DFT	64QAM	Edge_1RB_Right	21.09
n2	15	15	1902.5	DFT	64QAM	Outer_Full	21.56
n2	15	15	1902.5	DFT	256QAM	Inner_Full	20.35
n2	15	15	1902.5	DFT	256QAM	Edge_1RB_Left	19.79
n2	15	15	1902.5	DFT	256QAM	Edge_1RB_Right	19.33



BAND	BW(MHz)	SCS(kHz)	FREQ(MHz)	OFDM	MODULATION	RB LOCATION	POWER(dBm)
n2	15	15	1902.5	DFT	256QAM	Outer_Full	20.01
n2	15	15	1902.5	CP	QPSK	Inner_Full	22.58
n2	15	15	1902.5	CP	QPSK	Edge_1RB_Left	21.45
n2	15	15	1902.5	CP	QPSK	Edge_1RB_Right	21.14
n2	15	15	1902.5	CP	QPSK	Outer_Full	21.52
n2	15	15	1902.5	CP	16QAM	Inner_Full	22.16
n2	15	15	1902.5	CP	16QAM	Edge_1RB_Left	21.87
n2	15	15	1902.5	CP	16QAM	Edge_1RB_Right	21.52
n2	15	15	1902.5	CP	16QAM	Outer_Full	21.50
n2	15	15	1902.5	CP	64QAM	Inner_Full	21.75
n2	15	15	1902.5	CP	64QAM	Edge_1RB_Left	21.28
n2	15	15	1902.5	CP	64QAM	Edge_1RB_Right	20.97
n2	15	15	1902.5	CP	64QAM	Outer_Full	21.48
n2	15	15	1902.5	CP	256QAM	Inner_Full	19.26
n2	15	15	1902.5	CP	256QAM	Edge_1RB_Left	18.89
n2	15	15	1902.5	CP	256QAM	Edge_1RB_Right	18.50
n2	15	15	1902.5	CP	256QAM	Outer_Full	19.03
n2	20	15	1860	DFT	QPSK	Inner_Full	22.93
n2	20	15	1860	DFT	QPSK	Edge_1RB_Left	21.42
n2	20	15	1860	DFT	QPSK	Edge_1RB_Right	22.27
n2	20	15	1860	DFT	QPSK	Outer_Full	22.98
n2	20	15	1860	DFT	16QAM	Inner_Full	22.77
n2	20	15	1860	DFT	16QAM	Edge_1RB_Left	20.73
n2	20	15	1860	DFT	16QAM	Edge_1RB_Right	23.11
n2	20	15	1860	DFT	16QAM	Outer_Full	22.25
n2	20	15	1860	DFT	64QAM	Inner_Full	22.38
n2	20	15	1860	DFT	64QAM	Edge_1RB_Left	19.75
n2	20	15	1860	DFT	64QAM	Edge_1RB_Right	22.30
n2	20	15	1860	DFT	64QAM	Outer_Full	21.72
n2	20	15	1860	DFT	256QAM	Inner_Full	20.45
n2	20	15	1860	DFT	256QAM	Edge_1RB_Left	17.82
n2	20	15	1860	DFT	256QAM	Edge_1RB_Right	20.65
n2	20	15	1860	DFT	256QAM	Outer_Full	20.13
n2	20	15	1860	CP	QPSK	Inner_Full	22.90
n2	20	15	1860	CP	QPSK	Edge_1RB_Left	19.90
n2	20	15	1860	CP	QPSK	Edge_1RB_Right	22.56
n2	20	15	1860	CP	QPSK	Outer_Full	21.75
n2	20	15	1860	CP	16QAM	Inner_Full	22.54
n2	20	15	1860	CP	16QAM	Edge_1RB_Left	20.20
n2	20	15	1860	CP	16QAM	Edge_1RB_Right	22.85
n2	20	15	1860	CP	16QAM	Outer_Full	21.71



BAND	BW(MHz)	SCS(kHz)	FREQ(MHz)	OFDM	MODULATION	RB LOCATION	POWER(dBm)
n2	20	15	1860	CP	64QAM	Inner_Full	22.18
n2	20	15	1860	CP	64QAM	Edge_1RB_Left	19.72
n2	20	15	1860	CP	64QAM	Edge_1RB_Right	22.34
n2	20	15	1860	CP	64QAM	Outer_Full	21.75
n2	20	15	1860	CP	256QAM	Inner_Full	19.98
n2	20	15	1860	CP	256QAM	Edge_1RB_Left	16.90
n2	20	15	1860	CP	256QAM	Edge_1RB_Right	19.81
n2	20	15	1860	CP	256QAM	Outer_Full	19.29
n2	20	15	1880	DFT	QPSK	Inner_Full	22.96
n2	20	15	1880	DFT	QPSK	Edge_1RB_Left	22.20
n2	20	15	1880	DFT	QPSK	Edge_1RB_Right	22.19
n2	20	15	1880	DFT	QPSK	Outer_Full	23.00
n2	20	15	1880	DFT	16QAM	Inner_Full	22.82
n2	20	15	1880	DFT	16QAM	Edge_1RB_Left	23.09
n2	20	15	1880	DFT	16QAM	Edge_1RB_Right	22.21
n2	20	15	1880	DFT	16QAM	Outer_Full	22.35
n2	20	15	1880	DFT	64QAM	Inner_Full	21.66
n2	20	15	1880	DFT	64QAM	Edge_1RB_Left	22.35
n2	20	15	1880	DFT	64QAM	Edge_1RB_Right	21.20
n2	20	15	1880	DFT	64QAM	Outer_Full	21.83
n2	20	15	1880	DFT	256QAM	Inner_Full	20.44
n2	20	15	1880	DFT	256QAM	Edge_1RB_Left	20.83
n2	20	15	1880	DFT	256QAM	Edge_1RB_Right	19.31
n2	20	15	1880	DFT	256QAM	Outer_Full	20.29
n2	20	15	1880	CP	QPSK	Inner_Full	22.78
n2	20	15	1880	CP	QPSK	Edge_1RB_Left	22.47
n2	20	15	1880	CP	QPSK	Edge_1RB_Right	21.42
n2	20	15	1880	CP	QPSK	Outer_Full	21.72
n2	20	15	1880	CP	16QAM	Inner_Full	22.12
n2	20	15	1880	CP	16QAM	Edge_1RB_Left	22.91
n2	20	15	1880	CP	16QAM	Edge_1RB_Right	21.76
n2	20	15	1880	CP	16QAM	Outer_Full	21.68
n2	20	15	1880	CP	64QAM	Inner_Full	21.89
n2	20	15	1880	CP	64QAM	Edge_1RB_Left	22.34
n2	20	15	1880	CP	64QAM	Edge_1RB_Right	21.21
n2	20	15	1880	CP	64QAM	Outer_Full	21.81
n2	20	15	1880	CP	256QAM	Inner_Full	19.43
n2	20	15	1880	CP	256QAM	Edge_1RB_Left	20.05
n2	20	15	1880	CP	256QAM	Edge_1RB_Right	18.68
n2	20	15	1880	CP	256QAM	Outer_Full	19.31
n2	20	15	1900	DFT	QPSK	Inner_Full	23.01



BAND	BW(MHz)	SCS(kHz)	FREQ(MHz)	OFDM	MODULATION	RB LOCATION	POWER(dBm)
n2	20	15	1900	DFT	QPSK	Edge_1RB_Left	22.13
n2	20	15	1900	DFT	QPSK	Edge_1RB_Right	22.11
n2	20	15	1900	DFT	QPSK	Outer_Full	22.70
n2	20	15	1900	DFT	16QAM	Inner_Full	22.69
n2	20	15	1900	DFT	16QAM	Edge_1RB_Left	22.16
n2	20	15	1900	DFT	16QAM	Edge_1RB_Right	21.89
n2	20	15	1900	DFT	16QAM	Outer_Full	21.99
n2	20	15	1900	DFT	64QAM	Inner_Full	21.73
n2	20	15	1900	DFT	64QAM	Edge_1RB_Left	21.28
n2	20	15	1900	DFT	64QAM	Edge_1RB_Right	21.06
n2	20	15	1900	DFT	64QAM	Outer_Full	21.52
n2	20	15	1900	DFT	256QAM	Inner_Full	20.17
n2	20	15	1900	DFT	256QAM	Edge_1RB_Left	19.75
n2	20	15	1900	DFT	256QAM	Edge_1RB_Right	19.33
n2	20	15	1900	DFT	256QAM	Outer_Full	19.96
n2	20	15	1900	CP	QPSK	Inner_Full	22.64
n2	20	15	1900	CP	QPSK	Edge_1RB_Left	21.42
n2	20	15	1900	CP	QPSK	Edge_1RB_Right	21.24
n2	20	15	1900	CP	QPSK	Outer_Full	21.41
n2	20	15	1900	CP	16QAM	Inner_Full	22.09
n2	20	15	1900	CP	16QAM	Edge_1RB_Left	21.73
n2	20	15	1900	CP	16QAM	Edge_1RB_Right	21.53
n2	20	15	1900	CP	16QAM	Outer_Full	21.41
n2	20	15	1900	CP	64QAM	Inner_Full	21.70
n2	20	15	1900	CP	64QAM	Edge_1RB_Left	21.21
n2	20	15	1900	CP	64QAM	Edge_1RB_Right	21.03
n2	20	15	1900	CP	64QAM	Outer_Full	21.46
n2	20	15	1900	CP	256QAM	Inner_Full	19.24
n2	20	15	1900	CP	256QAM	Edge_1RB_Left	18.79
n2	20	15	1900	CP	256QAM	Edge_1RB_Right	18.52
n2	20	15	1900	CP	256QAM	Outer_Full	19.08
n2	25	15	1862.5	DFT	QPSK	Inner_Full	23.12
n2	25	15	1862.5	DFT	QPSK	Edge_1RB_Left	22.22
n2	25	15	1862.5	DFT	QPSK	Edge_1RB_Right	22.45
n2	25	15	1862.5	DFT	QPSK	Outer_Full	23.06
n2	25	15	1862.5	DFT	16QAM	Inner_Full	22.90
n2	25	15	1862.5	DFT	16QAM	Edge_1RB_Left	21.53
n2	25	15	1862.5	DFT	16QAM	Edge_1RB_Right	22.94
n2	25	15	1862.5	DFT	16QAM	Outer_Full	22.36
n2	25	15	1862.5	DFT	64QAM	Inner_Full	22.03
n2	25	15	1862.5	DFT	64QAM	Edge_1RB_Left	20.71



BAND	BW(MHz)	SCS(kHz)	FREQ(MHz)	OFDM	MODULATION	RB LOCATION	POWER(dBm)
n2	25	15	1862.5	DFT	64QAM	Edge_1RB_Right	22.19
n2	25	15	1862.5	DFT	64QAM	Outer_Full	21.81
n2	25	15	1862.5	DFT	256QAM	Inner_Full	20.37
n2	25	15	1862.5	DFT	256QAM	Edge_1RB_Left	18.99
n2	25	15	1862.5	DFT	256QAM	Edge_1RB_Right	20.49
n2	25	15	1862.5	DFT	256QAM	Outer_Full	20.27
n2	25	15	1862.5	CP	QPSK	Inner_Full	23.11
n2	25	15	1862.5	CP	QPSK	Edge_1RB_Left	20.92
n2	25	15	1862.5	CP	QPSK	Edge_1RB_Right	22.36
n2	25	15	1862.5	CP	QPSK	Outer_Full	21.87
n2	25	15	1862.5	CP	16QAM	Inner_Full	22.60
n2	25	15	1862.5	CP	16QAM	Edge_1RB_Left	21.31
n2	25	15	1862.5	CP	16QAM	Edge_1RB_Right	22.81
n2	25	15	1862.5	CP	16QAM	Outer_Full	21.94
n2	25	15	1862.5	CP	64QAM	Inner_Full	22.23
n2	25	15	1862.5	CP	64QAM	Edge_1RB_Left	20.68
n2	25	15	1862.5	CP	64QAM	Edge_1RB_Right	22.14
n2	25	15	1862.5	CP	64QAM	Outer_Full	21.90
n2	25	15	1862.5	CP	256QAM	Inner_Full	19.67
n2	25	15	1862.5	CP	256QAM	Edge_1RB_Left	18.04
n2	25	15	1862.5	CP	256QAM	Edge_1RB_Right	19.62
n2	25	15	1862.5	CP	256QAM	Outer_Full	19.34
n2	25	15	1880	DFT	QPSK	Inner_Full	23.16
n2	25	15	1880	DFT	QPSK	Edge_1RB_Left	22.30
n2	25	15	1880	DFT	QPSK	Edge_1RB_Right	22.43
n2	25	15	1880	DFT	QPSK	Outer_Full	23.02
n2	25	15	1880	DFT	16QAM	Inner_Full	22.97
n2	25	15	1880	DFT	16QAM	Edge_1RB_Left	22.61
n2	25	15	1880	DFT	16QAM	Edge_1RB_Right	22.43
n2	25	15	1880	DFT	16QAM	Outer_Full	22.29
n2	25	15	1880	DFT	64QAM	Inner_Full	21.94
n2	25	15	1880	DFT	64QAM	Edge_1RB_Left	21.73
n2	25	15	1880	DFT	64QAM	Edge_1RB_Right	21.58
n2	25	15	1880	DFT	64QAM	Outer_Full	21.69
n2	25	15	1880	DFT	256QAM	Inner_Full	20.34
n2	25	15	1880	DFT	256QAM	Edge_1RB_Left	20.16
n2	25	15	1880	DFT	256QAM	Edge_1RB_Right	19.84
n2	25	15	1880	DFT	256QAM	Outer_Full	20.36
n2	25	15	1880	CP	QPSK	Inner_Full	22.69
n2	25	15	1880	CP	QPSK	Edge_1RB_Left	21.94
n2	25	15	1880	CP	QPSK	Edge_1RB_Right	21.60



BAND	BW(MHz)	SCS(kHz)	FREQ(MHz)	OFDM	MODULATION	RB LOCATION	POWER(dBm)
n2	25	15	1880	CP	QPSK	Outer_Full	21.84
n2	25	15	1880	CP	16QAM	Inner_Full	22.33
n2	25	15	1880	CP	16QAM	Edge_1RB_Left	22.49
n2	25	15	1880	CP	16QAM	Edge_1RB_Right	22.09
n2	25	15	1880	CP	16QAM	Outer_Full	21.88
n2	25	15	1880	CP	64QAM	Inner_Full	21.90
n2	25	15	1880	CP	64QAM	Edge_1RB_Left	21.81
n2	25	15	1880	CP	64QAM	Edge_1RB_Right	21.50
n2	25	15	1880	CP	64QAM	Outer_Full	21.83
n2	25	15	1880	CP	256QAM	Inner_Full	19.45
n2	25	15	1880	CP	256QAM	Edge_1RB_Left	19.31
n2	25	15	1880	CP	256QAM	Edge_1RB_Right	18.98
n2	25	15	1880	CP	256QAM	Outer_Full	19.42
n2	25	15	1897.5	DFT	QPSK	Inner_Full	23.18
n2	25	15	1897.5	DFT	QPSK	Edge_1RB_Left	22.43
n2	25	15	1897.5	DFT	QPSK	Edge_1RB_Right	22.40
n2	25	15	1897.5	DFT	QPSK	Outer_Full	22.82
n2	25	15	1897.5	DFT	16QAM	Inner_Full	22.91
n2	25	15	1897.5	DFT	16QAM	Edge_1RB_Left	22.49
n2	25	15	1897.5	DFT	16QAM	Edge_1RB_Right	21.81
n2	25	15	1897.5	DFT	16QAM	Outer_Full	21.99
n2	25	15	1897.5	DFT	64QAM	Inner_Full	21.72
n2	25	15	1897.5	DFT	64QAM	Edge_1RB_Left	21.67
n2	25	15	1897.5	DFT	64QAM	Edge_1RB_Right	20.97
n2	25	15	1897.5	DFT	64QAM	Outer_Full	21.49
n2	25	15	1897.5	DFT	256QAM	Inner_Full	20.10
n2	25	15	1897.5	DFT	256QAM	Edge_1RB_Left	20.18
n2	25	15	1897.5	DFT	256QAM	Edge_1RB_Right	19.32
n2	25	15	1897.5	DFT	256QAM	Outer_Full	20.13
n2	25	15	1897.5	CP	QPSK	Inner_Full	22.60
n2	25	15	1897.5	CP	QPSK	Edge_1RB_Left	21.88
n2	25	15	1897.5	CP	QPSK	Edge_1RB_Right	21.16
n2	25	15	1897.5	CP	QPSK	Outer_Full	21.61
n2	25	15	1897.5	CP	16QAM	Inner_Full	22.07
n2	25	15	1897.5	CP	16QAM	Edge_1RB_Left	22.19
n2	25	15	1897.5	CP	16QAM	Edge_1RB_Right	21.51
n2	25	15	1897.5	CP	16QAM	Outer_Full	21.62
n2	25	15	1897.5	CP	64QAM	Inner_Full	21.78
n2	25	15	1897.5	CP	64QAM	Edge_1RB_Left	21.66
n2	25	15	1897.5	CP	64QAM	Edge_1RB_Right	20.99
n2	25	15	1897.5	CP	64QAM	Outer_Full	21.59



BAND	BW(MHz)	SCS(kHz)	FREQ(MHz)	OFDM	MODULATION	RB LOCATION	POWER(dBm)
n2	25	15	1897.5	CP	256QAM	Inner_Full	19.13
n2	25	15	1897.5	CP	256QAM	Edge_1RB_Left	19.29
n2	25	15	1897.5	CP	256QAM	Edge_1RB_Right	18.48
n2	25	15	1897.5	CP	256QAM	Outer_Full	19.12
n2	30	15	1865	DFT	QPSK	Inner_Full	23.10
n2	30	15	1865	DFT	QPSK	Edge_1RB_Left	22.21
n2	30	15	1865	DFT	QPSK	Edge_1RB_Right	22.35
n2	30	15	1865	DFT	QPSK	Outer_Full	23.00
n2	30	15	1865	DFT	16QAM	Inner_Full	22.88
n2	30	15	1865	DFT	16QAM	Edge_1RB_Left	21.49
n2	30	15	1865	DFT	16QAM	Edge_1RB_Right	22.84
n2	30	15	1865	DFT	16QAM	Outer_Full	22.44
n2	30	15	1865	DFT	64QAM	Inner_Full	22.18
n2	30	15	1865	DFT	64QAM	Edge_1RB_Left	20.70
n2	30	15	1865	DFT	64QAM	Edge_1RB_Right	22.06
n2	30	15	1865	DFT	64QAM	Outer_Full	21.89
n2	30	15	1865	DFT	256QAM	Inner_Full	20.46
n2	30	15	1865	DFT	256QAM	Edge_1RB_Left	18.95
n2	30	15	1865	DFT	256QAM	Edge_1RB_Right	20.37
n2	30	15	1865	DFT	256QAM	Outer_Full	20.33
n2	30	15	1865	CP	QPSK	Inner_Full	23.05
n2	30	15	1865	CP	QPSK	Edge_1RB_Left	20.78
n2	30	15	1865	CP	QPSK	Edge_1RB_Right	22.22
n2	30	15	1865	CP	QPSK	Outer_Full	21.87
n2	30	15	1865	CP	16QAM	Inner_Full	22.68
n2	30	15	1865	CP	16QAM	Edge_1RB_Left	21.18
n2	30	15	1865	CP	16QAM	Edge_1RB_Right	22.58
n2	30	15	1865	CP	16QAM	Outer_Full	21.84
n2	30	15	1865	CP	64QAM	Inner_Full	22.14
n2	30	15	1865	CP	64QAM	Edge_1RB_Left	20.54
n2	30	15	1865	CP	64QAM	Edge_1RB_Right	21.96
n2	30	15	1865	CP	64QAM	Outer_Full	21.88
n2	30	15	1865	CP	256QAM	Inner_Full	19.62
n2	30	15	1865	CP	256QAM	Edge_1RB_Left	18.00
n2	30	15	1865	CP	256QAM	Edge_1RB_Right	19.57
n2	30	15	1865	CP	256QAM	Outer_Full	19.47
n2	30	15	1880	DFT	QPSK	Inner_Full	23.11
n2	30	15	1880	DFT	QPSK	Edge_1RB_Left	22.28
n2	30	15	1880	DFT	QPSK	Edge_1RB_Right	22.43
n2	30	15	1880	DFT	QPSK	Outer_Full	23.12
n2	30	15	1880	DFT	16QAM	Inner_Full	23.02



BAND	BW(MHz)	SCS(kHz)	FREQ(MHz)	OFDM	MODULATION	RB LOCATION	POWER(dBm)
n2	30	15	1880	DFT	16QAM	Edge_1RB_Left	22.73
n2	30	15	1880	DFT	16QAM	Edge_1RB_Right	22.25
n2	30	15	1880	DFT	16QAM	Outer_Full	22.32
n2	30	15	1880	DFT	64QAM	Inner_Full	21.86
n2	30	15	1880	DFT	64QAM	Edge_1RB_Left	21.77
n2	30	15	1880	DFT	64QAM	Edge_1RB_Right	21.28
n2	30	15	1880	DFT	64QAM	Outer_Full	21.78
n2	30	15	1880	DFT	256QAM	Inner_Full	20.31
n2	30	15	1880	DFT	256QAM	Edge_1RB_Left	20.19
n2	30	15	1880	DFT	256QAM	Edge_1RB_Right	19.69
n2	30	15	1880	DFT	256QAM	Outer_Full	20.36
n2	30	15	1880	CP	QPSK	Inner_Full	22.81
n2	30	15	1880	CP	QPSK	Edge_1RB_Left	22.08
n2	30	15	1880	CP	QPSK	Edge_1RB_Right	21.65
n2	30	15	1880	CP	QPSK	Outer_Full	21.80
n2	30	15	1880	CP	16QAM	Inner_Full	22.29
n2	30	15	1880	CP	16QAM	Edge_1RB_Left	22.30
n2	30	15	1880	CP	16QAM	Edge_1RB_Right	21.88
n2	30	15	1880	CP	16QAM	Outer_Full	21.74
n2	30	15	1880	CP	64QAM	Inner_Full	21.93
n2	30	15	1880	CP	64QAM	Edge_1RB_Left	21.74
n2	30	15	1880	CP	64QAM	Edge_1RB_Right	21.32
n2	30	15	1880	CP	64QAM	Outer_Full	21.79
n2	30	15	1880	CP	256QAM	Inner_Full	19.52
n2	30	15	1880	CP	256QAM	Edge_1RB_Left	19.33
n2	30	15	1880	CP	256QAM	Edge_1RB_Right	18.86
n2	30	15	1880	CP	256QAM	Outer_Full	19.51
n2	30	15	1895	DFT	QPSK	Inner_Full	23.16
n2	30	15	1895	DFT	QPSK	Edge_1RB_Left	22.31
n2	30	15	1895	DFT	QPSK	Edge_1RB_Right	22.37
n2	30	15	1895	DFT	QPSK	Outer_Full	22.95
n2	30	15	1895	DFT	16QAM	Inner_Full	23.05
n2	30	15	1895	DFT	16QAM	Edge_1RB_Left	22.63
n2	30	15	1895	DFT	16QAM	Edge_1RB_Right	21.76
n2	30	15	1895	DFT	16QAM	Outer_Full	22.07
n2	30	15	1895	DFT	64QAM	Inner_Full	21.64
n2	30	15	1895	DFT	64QAM	Edge_1RB_Left	21.87
n2	30	15	1895	DFT	64QAM	Edge_1RB_Right	21.03
n2	30	15	1895	DFT	64QAM	Outer_Full	21.66
n2	30	15	1895	DFT	256QAM	Inner_Full	20.14
n2	30	15	1895	DFT	256QAM	Edge_1RB_Left	20.33



BAND	BW(MHz)	SCS(kHz)	FREQ(MHz)	OFDM	MODULATION	RB LOCATION	POWER(dBm)
n2	30	15	1895	DFT	256QAM	Edge_1RB_Right	19.31
n2	30	15	1895	DFT	256QAM	Outer_Full	20.08
n2	30	15	1895	CP	QPSK	Inner_Full	22.57
n2	30	15	1895	CP	QPSK	Edge_1RB_Left	22.05
n2	30	15	1895	CP	QPSK	Edge_1RB_Right	21.25
n2	30	15	1895	CP	QPSK	Outer_Full	21.53
n2	30	15	1895	CP	16QAM	Inner_Full	22.10
n2	30	15	1895	CP	16QAM	Edge_1RB_Left	22.34
n2	30	15	1895	CP	16QAM	Edge_1RB_Right	21.54
n2	30	15	1895	CP	16QAM	Outer_Full	21.53
n2	30	15	1895	CP	64QAM	Inner_Full	21.68
n2	30	15	1895	CP	64QAM	Edge_1RB_Left	21.75
n2	30	15	1895	CP	64QAM	Edge_1RB_Right	20.97
n2	30	15	1895	CP	64QAM	Outer_Full	21.59
n2	30	15	1895	CP	256QAM	Inner_Full	19.15
n2	30	15	1895	CP	256QAM	Edge_1RB_Left	19.48
n2	30	15	1895	CP	256QAM	Edge_1RB_Right	18.60
n2	30	15	1895	CP	256QAM	Outer_Full	19.16
n2	35	15	1872.5	DFT	QPSK	Inner_Full	23.10
n2	35	15	1872.5	DFT	QPSK	Edge_1RB_Left	23.09
n2	35	15	1872.5	DFT	QPSK	Edge_1RB_Right	23.09
n2	35	15	1872.5	DFT	QPSK	Outer_Full	23.07
n2	35	15	1872.5	DFT	16QAM	Inner_Full	22.38
n2	35	15	1872.5	DFT	16QAM	Edge_1RB_Left	22.39
n2	35	15	1872.5	DFT	16QAM	Edge_1RB_Right	22.47
n2	35	15	1872.5	DFT	16QAM	Outer_Full	22.42
n2	35	15	1872.5	DFT	64QAM	Inner_Full	21.88
n2	35	15	1872.5	DFT	64QAM	Edge_1RB_Left	21.88
n2	35	15	1872.5	DFT	64QAM	Edge_1RB_Right	21.86
n2	35	15	1872.5	DFT	64QAM	Outer_Full	21.88
n2	35	15	1872.5	DFT	256QAM	Inner_Full	20.34
n2	35	15	1872.5	DFT	256QAM	Edge_1RB_Left	20.34
n2	35	15	1872.5	DFT	256QAM	Edge_1RB_Right	20.32
n2	35	15	1872.5	DFT	256QAM	Outer_Full	20.41
n2	35	15	1872.5	CP	QPSK	Inner_Full	21.82
n2	35	15	1872.5	CP	QPSK	Edge_1RB_Left	21.89
n2	35	15	1872.5	CP	QPSK	Edge_1RB_Right	21.90
n2	35	15	1872.5	CP	QPSK	Outer_Full	21.89
n2	35	15	1872.5	CP	16QAM	Inner_Full	21.83
n2	35	15	1872.5	CP	16QAM	Edge_1RB_Left	21.85
n2	35	15	1872.5	CP	16QAM	Edge_1RB_Right	21.83



BAND	BW(MHz)	SCS(kHz)	FREQ(MHz)	OFDM	MODULATION	RB LOCATION	POWER(dBm)
n2	35	15	1872.5	CP	16QAM	Outer_Full	21.83
n2	35	15	1872.5	CP	64QAM	Inner_Full	21.99
n2	35	15	1872.5	CP	64QAM	Edge_1RB_Left	21.93
n2	35	15	1872.5	CP	64QAM	Edge_1RB_Right	21.99
n2	35	15	1872.5	CP	64QAM	Outer_Full	21.94
n2	35	15	1872.5	CP	256QAM	Inner_Full	19.43
n2	35	15	1872.5	CP	256QAM	Edge_1RB_Left	19.46
n2	35	15	1872.5	CP	256QAM	Edge_1RB_Right	19.46
n2	35	15	1872.5	CP	256QAM	Outer_Full	19.47
n2	35	15	1880	DFT	QPSK	Inner_Full	23.12
n2	35	15	1880	DFT	QPSK	Edge_1RB_Left	23.17
n2	35	15	1880	DFT	QPSK	Edge_1RB_Right	23.04
n2	35	15	1880	DFT	QPSK	Outer_Full	23.11
n2	35	15	1880	DFT	16QAM	Inner_Full	22.41
n2	35	15	1880	DFT	16QAM	Edge_1RB_Left	22.43
n2	35	15	1880	DFT	16QAM	Edge_1RB_Right	22.41
n2	35	15	1880	DFT	16QAM	Outer_Full	22.42
n2	35	15	1880	DFT	64QAM	Inner_Full	21.92
n2	35	15	1880	DFT	64QAM	Edge_1RB_Left	21.86
n2	35	15	1880	DFT	64QAM	Edge_1RB_Right	21.93
n2	35	15	1880	DFT	64QAM	Outer_Full	21.92
n2	35	15	1880	DFT	256QAM	Inner_Full	20.43
n2	35	15	1880	DFT	256QAM	Edge_1RB_Left	20.51
n2	35	15	1880	DFT	256QAM	Edge_1RB_Right	20.49
n2	35	15	1880	DFT	256QAM	Outer_Full	20.50
n2	35	15	1880	CP	QPSK	Inner_Full	21.84
n2	35	15	1880	CP	QPSK	Edge_1RB_Left	21.85
n2	35	15	1880	CP	QPSK	Edge_1RB_Right	21.86
n2	35	15	1880	CP	QPSK	Outer_Full	21.83
n2	35	15	1880	CP	16QAM	Inner_Full	21.82
n2	35	15	1880	CP	16QAM	Edge_1RB_Left	21.82
n2	35	15	1880	CP	16QAM	Edge_1RB_Right	21.79
n2	35	15	1880	CP	16QAM	Outer_Full	21.81
n2	35	15	1880	CP	64QAM	Inner_Full	21.87
n2	35	15	1880	CP	64QAM	Edge_1RB_Left	21.91
n2	35	15	1880	CP	64QAM	Edge_1RB_Right	21.91
n2	35	15	1880	CP	64QAM	Outer_Full	21.91
n2	35	15	1880	CP	256QAM	Inner_Full	19.47
n2	35	15	1880	CP	256QAM	Edge_1RB_Left	19.49
n2	35	15	1880	CP	256QAM	Edge_1RB_Right	19.50
n2	35	15	1880	CP	256QAM	Outer_Full	19.50



BAND	BW(MHz)	SCS(kHz)	FREQ(MHz)	OFDM	MODULATION	RB LOCATION	POWER(dBm)
n2	35	15	1892.5	DFT	QPSK	Inner_Full	22.98
n2	35	15	1892.5	DFT	QPSK	Edge_1RB_Left	22.95
n2	35	15	1892.5	DFT	QPSK	Edge_1RB_Right	22.90
n2	35	15	1892.5	DFT	QPSK	Outer_Full	22.94
n2	35	15	1892.5	DFT	16QAM	Inner_Full	22.15
n2	35	15	1892.5	DFT	16QAM	Edge_1RB_Left	22.24
n2	35	15	1892.5	DFT	16QAM	Edge_1RB_Right	22.25
n2	35	15	1892.5	DFT	16QAM	Outer_Full	22.19
n2	35	15	1892.5	DFT	64QAM	Inner_Full	21.69
n2	35	15	1892.5	DFT	64QAM	Edge_1RB_Left	21.69
n2	35	15	1892.5	DFT	64QAM	Edge_1RB_Right	21.69
n2	35	15	1892.5	DFT	64QAM	Outer_Full	21.66
n2	35	15	1892.5	DFT	256QAM	Inner_Full	20.29
n2	35	15	1892.5	DFT	256QAM	Edge_1RB_Left	20.29
n2	35	15	1892.5	DFT	256QAM	Edge_1RB_Right	20.22
n2	35	15	1892.5	DFT	256QAM	Outer_Full	20.28
n2	35	15	1892.5	CP	QPSK	Inner_Full	21.75
n2	35	15	1892.5	CP	QPSK	Edge_1RB_Left	21.75
n2	35	15	1892.5	CP	QPSK	Edge_1RB_Right	21.71
n2	35	15	1892.5	CP	QPSK	Outer_Full	21.76
n2	35	15	1892.5	CP	16QAM	Inner_Full	21.69
n2	35	15	1892.5	CP	16QAM	Edge_1RB_Left	21.63
n2	35	15	1892.5	CP	16QAM	Edge_1RB_Right	21.65
n2	35	15	1892.5	CP	16QAM	Outer_Full	21.70
n2	35	15	1892.5	CP	64QAM	Inner_Full	21.77
n2	35	15	1892.5	CP	64QAM	Edge_1RB_Left	21.78
n2	35	15	1892.5	CP	64QAM	Edge_1RB_Right	21.77
n2	35	15	1892.5	CP	64QAM	Outer_Full	21.76
n2	35	15	1892.5	CP	256QAM	Inner_Full	19.38
n2	35	15	1892.5	CP	256QAM	Edge_1RB_Left	19.38
n2	35	15	1892.5	CP	256QAM	Edge_1RB_Right	19.39
n2	35	15	1892.5	CP	256QAM	Outer_Full	19.37
n2	40	15	1870	DFT	QPSK	Inner_Full	23.14
n2	40	15	1870	DFT	QPSK	Edge_1RB_Left	22.00
n2	40	15	1870	DFT	QPSK	Edge_1RB_Right	22.31
n2	40	15	1870	DFT	QPSK	Outer_Full	23.09
n2	40	15	1870	DFT	16QAM	Inner_Full	23.00
n2	40	15	1870	DFT	16QAM	Edge_1RB_Left	21.34
n2	40	15	1870	DFT	16QAM	Edge_1RB_Right	22.41
n2	40	15	1870	DFT	16QAM	Outer_Full	22.26
n2	40	15	1870	DFT	64QAM	Inner_Full	22.12



BAND	BW(MHz)	SCS(kHz)	FREQ(MHz)	OFDM	MODULATION	RB LOCATION	POWER(dBm)
n2	40	15	1870	DFT	64QAM	Edge_1RB_Left	20.55
n2	40	15	1870	DFT	64QAM	Edge_1RB_Right	21.67
n2	40	15	1870	DFT	64QAM	Outer_Full	21.74
n2	40	15	1870	DFT	256QAM	Inner_Full	20.52
n2	40	15	1870	DFT	256QAM	Edge_1RB_Left	18.86
n2	40	15	1870	DFT	256QAM	Edge_1RB_Right	20.02
n2	40	15	1870	DFT	256QAM	Outer_Full	20.27
n2	40	15	1870	CP	QPSK	Inner_Full	22.95
n2	40	15	1870	CP	QPSK	Edge_1RB_Left	20.69
n2	40	15	1870	CP	QPSK	Edge_1RB_Right	21.81
n2	40	15	1870	CP	QPSK	Outer_Full	21.75
n2	40	15	1870	CP	16QAM	Inner_Full	22.59
n2	40	15	1870	CP	16QAM	Edge_1RB_Left	21.08
n2	40	15	1870	CP	16QAM	Edge_1RB_Right	22.19
n2	40	15	1870	CP	16QAM	Outer_Full	21.74
n2	40	15	1870	CP	64QAM	Inner_Full	22.15
n2	40	15	1870	CP	64QAM	Edge_1RB_Left	20.43
n2	40	15	1870	CP	64QAM	Edge_1RB_Right	21.59
n2	40	15	1870	CP	64QAM	Outer_Full	21.74
n2	40	15	1870	CP	256QAM	Inner_Full	19.54
n2	40	15	1870	CP	256QAM	Edge_1RB_Left	17.88
n2	40	15	1870	CP	256QAM	Edge_1RB_Right	19.10
n2	40	15	1870	CP	256QAM	Outer_Full	19.32
n2	40	15	1880	DFT	QPSK	Inner_Full	23.21
n2	40	15	1880	DFT	QPSK	Edge_1RB_Left	22.20
n2	40	15	1880	DFT	QPSK	Edge_1RB_Right	22.35
n2	40	15	1880	DFT	QPSK	Outer_Full	22.82
n2	40	15	1880	DFT	16QAM	Inner_Full	23.04
n2	40	15	1880	DFT	16QAM	Edge_1RB_Left	22.18
n2	40	15	1880	DFT	16QAM	Edge_1RB_Right	22.15
n2	40	15	1880	DFT	16QAM	Outer_Full	22.30
n2	40	15	1880	DFT	64QAM	Inner_Full	22.03
n2	40	15	1880	DFT	64QAM	Edge_1RB_Left	21.53
n2	40	15	1880	DFT	64QAM	Edge_1RB_Right	21.47
n2	40	15	1880	DFT	64QAM	Outer_Full	21.72
n2	40	15	1880	DFT	256QAM	Inner_Full	20.41
n2	40	15	1880	DFT	256QAM	Edge_1RB_Left	19.75
n2	40	15	1880	DFT	256QAM	Edge_1RB_Right	19.70
n2	40	15	1880	DFT	256QAM	Outer_Full	20.34
n2	40	15	1880	CP	QPSK	Inner_Full	22.77
n2	40	15	1880	CP	QPSK	Edge_1RB_Left	21.75



BAND	BW(MHz)	SCS(kHz)	FREQ(MHz)	OFDM	MODULATION	RB LOCATION	POWER(dBm)
n2	40	15	1880	CP	QPSK	Edge_1RB_Right	21.56
n2	40	15	1880	CP	QPSK	Outer_Full	21.73
n2	40	15	1880	CP	16QAM	Inner_Full	22.38
n2	40	15	1880	CP	16QAM	Edge_1RB_Left	22.08
n2	40	15	1880	CP	16QAM	Edge_1RB_Right	21.92
n2	40	15	1880	CP	16QAM	Outer_Full	21.75
n2	40	15	1880	CP	64QAM	Inner_Full	21.95
n2	40	15	1880	CP	64QAM	Edge_1RB_Left	21.51
n2	40	15	1880	CP	64QAM	Edge_1RB_Right	21.35
n2	40	15	1880	CP	64QAM	Outer_Full	21.69
n2	40	15	1880	CP	256QAM	Inner_Full	19.45
n2	40	15	1880	CP	256QAM	Edge_1RB_Left	18.91
n2	40	15	1880	CP	256QAM	Edge_1RB_Right	18.77
n2	40	15	1880	CP	256QAM	Outer_Full	19.31
n2	40	15	1890	DFT	QPSK	Inner_Full	23.16
n2	40	15	1890	DFT	QPSK	Edge_1RB_Left	22.28
n2	40	15	1890	DFT	QPSK	Edge_1RB_Right	22.09
n2	40	15	1890	DFT	QPSK	Outer_Full	22.58
n2	40	15	1890	DFT	16QAM	Inner_Full	22.93
n2	40	15	1890	DFT	16QAM	Edge_1RB_Left	22.50
n2	40	15	1890	DFT	16QAM	Edge_1RB_Right	21.66
n2	40	15	1890	DFT	16QAM	Outer_Full	22.17
n2	40	15	1890	DFT	64QAM	Inner_Full	21.71
n2	40	15	1890	DFT	64QAM	Edge_1RB_Left	21.75
n2	40	15	1890	DFT	64QAM	Edge_1RB_Right	20.87
n2	40	15	1890	DFT	64QAM	Outer_Full	21.51
n2	40	15	1890	DFT	256QAM	Inner_Full	20.21
n2	40	15	1890	DFT	256QAM	Edge_1RB_Left	20.27
n2	40	15	1890	DFT	256QAM	Edge_1RB_Right	19.20
n2	40	15	1890	DFT	256QAM	Outer_Full	20.18
n2	40	15	1890	CP	QPSK	Inner_Full	22.48
n2	40	15	1890	CP	QPSK	Edge_1RB_Left	21.91
n2	40	15	1890	CP	QPSK	Edge_1RB_Right	20.96
n2	40	15	1890	CP	QPSK	Outer_Full	21.56
n2	40	15	1890	CP	16QAM	Inner_Full	22.12
n2	40	15	1890	CP	16QAM	Edge_1RB_Left	22.27
n2	40	15	1890	CP	16QAM	Edge_1RB_Right	21.34
n2	40	15	1890	CP	16QAM	Outer_Full	21.59
n2	40	15	1890	CP	64QAM	Inner_Full	21.63
n2	40	15	1890	CP	64QAM	Edge_1RB_Left	21.75
n2	40	15	1890	CP	64QAM	Edge_1RB_Right	20.83



No.24T04N001537-009-RF NR

BAND	BW(MHz)	SCS(kHz)	FREQ(MHz)	OFDM	MODULATION	RB LOCATION	POWER(dBm)
n2	40	15	1890	CP	64QAM	Outer_Full	21.59
n2	40	15	1890	CP	256QAM	Inner_Full	19.23
n2	40	15	1890	CP	256QAM	Edge_1RB_Left	19.35
n2	40	15	1890	CP	256QAM	Edge_1RB_Right	18.34
n2	40	15	1890	CP	256QAM	Outer_Full	19.16



n5

BAND	BW(MHz)	SCS(kHz)	FREQ(MHz)	OFDM	MODULATION	RB LOCATION	POWER(dBm)
n5	5	15	826.5	DFT	QPSK	Inner_Full	24.40
n5	5	15	826.5	DFT	QPSK	Edge_1RB_Left	21.78
n5	5	15	826.5	DFT	QPSK	Edge_1RB_Right	21.73
n5	5	15	826.5	DFT	QPSK	Outer_Full	23.36
n5	5	15	826.5	DFT	16QAM	Inner_Full	23.50
n5	5	15	826.5	DFT	16QAM	Edge_1RB_Left	22.47
n5	5	15	826.5	DFT	16QAM	Edge_1RB_Right	22.15
n5	5	15	826.5	DFT	16QAM	Outer_Full	22.42
n5	5	15	826.5	DFT	64QAM	Inner_Full	21.97
n5	5	15	826.5	DFT	64QAM	Edge_1RB_Left	21.97
n5	5	15	826.5	DFT	64QAM	Edge_1RB_Right	21.63
n5	5	15	826.5	DFT	64QAM	Outer_Full	21.94
n5	5	15	826.5	DFT	256QAM	Inner_Full	20.51
n5	5	15	826.5	DFT	256QAM	Edge_1RB_Left	20.27
n5	5	15	826.5	DFT	256QAM	Edge_1RB_Right	20.21
n5	5	15	826.5	DFT	256QAM	Outer_Full	20.47
n5	5	15	826.5	CP	QPSK	Inner_Full	22.90
n5	5	15	826.5	CP	QPSK	Edge_1RB_Left	21.76
n5	5	15	826.5	CP	QPSK	Edge_1RB_Right	21.67
n5	5	15	826.5	CP	QPSK	Outer_Full	21.91
n5	5	15	826.5	CP	16QAM	Inner_Full	22.51
n5	5	15	826.5	CP	16QAM	Edge_1RB_Left	21.96
n5	5	15	826.5	CP	16QAM	Edge_1RB_Right	21.77
n5	5	15	826.5	CP	16QAM	Outer_Full	21.84
n5	5	15	826.5	CP	64QAM	Inner_Full	22.04
n5	5	15	826.5	CP	64QAM	Edge_1RB_Left	21.26
n5	5	15	826.5	CP	64QAM	Edge_1RB_Right	21.33
n5	5	15	826.5	CP	64QAM	Outer_Full	21.84
n5	5	15	826.5	CP	256QAM	Inner_Full	19.63
n5	5	15	826.5	CP	256QAM	Edge_1RB_Left	18.09
n5	5	15	826.5	CP	256QAM	Edge_1RB_Right	18.37
n5	5	15	826.5	CP	256QAM	Outer_Full	19.51
n5	5	15	836.5	DFT	QPSK	Inner_Full	24.40
n5	5	15	836.5	DFT	QPSK	Edge_1RB_Left	21.66
n5	5	15	836.5	DFT	QPSK	Edge_1RB_Right	21.59
n5	5	15	836.5	DFT	QPSK	Outer_Full	24.03
n5	5	15	836.5	DFT	16QAM	Inner_Full	24.12
n5	5	15	836.5	DFT	16QAM	Edge_1RB_Left	22.86
n5	5	15	836.5	DFT	16QAM	Edge_1RB_Right	22.84



BAND	BW(MHz)	SCS(kHz)	FREQ(MHz)	OFDM	MODULATION	RB LOCATION	POWER(dBm)
n5	5	15	836.5	DFT	16QAM	Outer_Full	23.22
n5	5	15	836.5	DFT	64QAM	Inner_Full	22.94
n5	5	15	836.5	DFT	64QAM	Edge_1RB_Left	21.96
n5	5	15	836.5	DFT	64QAM	Edge_1RB_Right	21.92
n5	5	15	836.5	DFT	64QAM	Outer_Full	22.83
n5	5	15	836.5	DFT	256QAM	Inner_Full	21.39
n5	5	15	836.5	DFT	256QAM	Edge_1RB_Left	19.92
n5	5	15	836.5	DFT	256QAM	Edge_1RB_Right	19.82
n5	5	15	836.5	DFT	256QAM	Outer_Full	21.23
n5	5	15	836.5	CP	QPSK	Inner_Full	23.74
n5	5	15	836.5	CP	QPSK	Edge_1RB_Left	21.72
n5	5	15	836.5	CP	QPSK	Edge_1RB_Right	21.62
n5	5	15	836.5	CP	QPSK	Outer_Full	22.69
n5	5	15	836.5	CP	16QAM	Inner_Full	23.41
n5	5	15	836.5	CP	16QAM	Edge_1RB_Left	22.16
n5	5	15	836.5	CP	16QAM	Edge_1RB_Right	22.08
n5	5	15	836.5	CP	16QAM	Outer_Full	22.56
n5	5	15	836.5	CP	64QAM	Inner_Full	22.83
n5	5	15	836.5	CP	64QAM	Edge_1RB_Left	20.88
n5	5	15	836.5	CP	64QAM	Edge_1RB_Right	20.83
n5	5	15	836.5	CP	64QAM	Outer_Full	22.74
n5	5	15	836.5	CP	256QAM	Inner_Full	20.37
n5	5	15	836.5	CP	256QAM	Edge_1RB_Left	17.93
n5	5	15	836.5	CP	256QAM	Edge_1RB_Right	17.87
n5	5	15	836.5	CP	256QAM	Outer_Full	20.31
n5	5	15	846.5	DFT	QPSK	Inner_Full	24.23
n5	5	15	846.5	DFT	QPSK	Edge_1RB_Left	21.49
n5	5	15	846.5	DFT	QPSK	Edge_1RB_Right	21.36
n5	5	15	846.5	DFT	QPSK	Outer_Full	23.94
n5	5	15	846.5	DFT	16QAM	Inner_Full	23.97
n5	5	15	846.5	DFT	16QAM	Edge_1RB_Left	22.68
n5	5	15	846.5	DFT	16QAM	Edge_1RB_Right	22.54
n5	5	15	846.5	DFT	16QAM	Outer_Full	23.15
n5	5	15	846.5	DFT	64QAM	Inner_Full	22.80
n5	5	15	846.5	DFT	64QAM	Edge_1RB_Left	21.84
n5	5	15	846.5	DFT	64QAM	Edge_1RB_Right	21.71
n5	5	15	846.5	DFT	64QAM	Outer_Full	22.64
n5	5	15	846.5	DFT	256QAM	Inner_Full	21.23
n5	5	15	846.5	DFT	256QAM	Edge_1RB_Left	19.66
n5	5	15	846.5	DFT	256QAM	Edge_1RB_Right	19.51
n5	5	15	846.5	DFT	256QAM	Outer_Full	21.14



BAND	BW(MHz)	SCS(kHz)	FREQ(MHz)	OFDM	MODULATION	RB LOCATION	POWER(dBm)
n5	5	15	846.5	CP	QPSK	Inner_Full	23.71
n5	5	15	846.5	CP	QPSK	Edge_1RB_Left	21.54
n5	5	15	846.5	CP	QPSK	Edge_1RB_Right	21.37
n5	5	15	846.5	CP	QPSK	Outer_Full	22.60
n5	5	15	846.5	CP	16QAM	Inner_Full	23.38
n5	5	15	846.5	CP	16QAM	Edge_1RB_Left	21.94
n5	5	15	846.5	CP	16QAM	Edge_1RB_Right	21.80
n5	5	15	846.5	CP	16QAM	Outer_Full	22.58
n5	5	15	846.5	CP	64QAM	Inner_Full	22.60
n5	5	15	846.5	CP	64QAM	Edge_1RB_Left	20.68
n5	5	15	846.5	CP	64QAM	Edge_1RB_Right	20.56
n5	5	15	846.5	CP	64QAM	Outer_Full	22.67
n5	5	15	846.5	CP	256QAM	Inner_Full	20.35
n5	5	15	846.5	CP	256QAM	Edge_1RB_Left	17.73
n5	5	15	846.5	CP	256QAM	Edge_1RB_Right	17.57
n5	5	15	846.5	CP	256QAM	Outer_Full	20.14
n5	10	15	829	DFT	QPSK	Inner_Full	24.54
n5	10	15	829	DFT	QPSK	Edge_1RB_Left	21.71
n5	10	15	829	DFT	QPSK	Edge_1RB_Right	21.70
n5	10	15	829	DFT	QPSK	Outer_Full	23.37
n5	10	15	829	DFT	16QAM	Inner_Full	23.54
n5	10	15	829	DFT	16QAM	Edge_1RB_Left	22.78
n5	10	15	829	DFT	16QAM	Edge_1RB_Right	22.93
n5	10	15	829	DFT	16QAM	Outer_Full	22.48
n5	10	15	829	DFT	64QAM	Inner_Full	22.11
n5	10	15	829	DFT	64QAM	Edge_1RB_Left	21.96
n5	10	15	829	DFT	64QAM	Edge_1RB_Right	22.07
n5	10	15	829	DFT	64QAM	Outer_Full	22.04
n5	10	15	829	DFT	256QAM	Inner_Full	20.57
n5	10	15	829	DFT	256QAM	Edge_1RB_Left	19.94
n5	10	15	829	DFT	256QAM	Edge_1RB_Right	19.88
n5	10	15	829	DFT	256QAM	Outer_Full	20.57
n5	10	15	829	CP	QPSK	Inner_Full	23.00
n5	10	15	829	CP	QPSK	Edge_1RB_Left	21.78
n5	10	15	829	CP	QPSK	Edge_1RB_Right	21.76
n5	10	15	829	CP	QPSK	Outer_Full	22.00
n5	10	15	829	CP	16QAM	Inner_Full	22.57
n5	10	15	829	CP	16QAM	Edge_1RB_Left	22.14
n5	10	15	829	CP	16QAM	Edge_1RB_Right	22.08
n5	10	15	829	CP	16QAM	Outer_Full	21.97
n5	10	15	829	CP	64QAM	Inner_Full	22.00



BAND	BW(MHz)	SCS(kHz)	FREQ(MHz)	OFDM	MODULATION	RB LOCATION	POWER(dBm)
n5	10	15	829	CP	64QAM	Edge_1RB_Left	20.99
n5	10	15	829	CP	64QAM	Edge_1RB_Right	20.89
n5	10	15	829	CP	64QAM	Outer_Full	22.01
n5	10	15	829	CP	256QAM	Inner_Full	19.62
n5	10	15	829	CP	256QAM	Edge_1RB_Left	18.01
n5	10	15	829	CP	256QAM	Edge_1RB_Right	17.93
n5	10	15	829	CP	256QAM	Outer_Full	19.56
n5	10	15	836.5	DFT	QPSK	Inner_Full	24.40
n5	10	15	836.5	DFT	QPSK	Edge_1RB_Left	21.63
n5	10	15	836.5	DFT	QPSK	Edge_1RB_Right	21.55
n5	10	15	836.5	DFT	QPSK	Outer_Full	24.01
n5	10	15	836.5	DFT	16QAM	Inner_Full	24.03
n5	10	15	836.5	DFT	16QAM	Edge_1RB_Left	22.90
n5	10	15	836.5	DFT	16QAM	Edge_1RB_Right	22.84
n5	10	15	836.5	DFT	16QAM	Outer_Full	22.95
n5	10	15	836.5	DFT	64QAM	Inner_Full	22.88
n5	10	15	836.5	DFT	64QAM	Edge_1RB_Left	22.08
n5	10	15	836.5	DFT	64QAM	Edge_1RB_Right	22.04
n5	10	15	836.5	DFT	64QAM	Outer_Full	22.55
n5	10	15	836.5	DFT	256QAM	Inner_Full	21.36
n5	10	15	836.5	DFT	256QAM	Edge_1RB_Left	19.92
n5	10	15	836.5	DFT	256QAM	Edge_1RB_Right	19.72
n5	10	15	836.5	DFT	256QAM	Outer_Full	21.09
n5	10	15	836.5	CP	QPSK	Inner_Full	23.75
n5	10	15	836.5	CP	QPSK	Edge_1RB_Left	21.78
n5	10	15	836.5	CP	QPSK	Edge_1RB_Right	21.65
n5	10	15	836.5	CP	QPSK	Outer_Full	22.54
n5	10	15	836.5	CP	16QAM	Inner_Full	23.29
n5	10	15	836.5	CP	16QAM	Edge_1RB_Left	22.08
n5	10	15	836.5	CP	16QAM	Edge_1RB_Right	22.02
n5	10	15	836.5	CP	16QAM	Outer_Full	22.52
n5	10	15	836.5	CP	64QAM	Inner_Full	22.80
n5	10	15	836.5	CP	64QAM	Edge_1RB_Left	20.85
n5	10	15	836.5	CP	64QAM	Edge_1RB_Right	20.87
n5	10	15	836.5	CP	64QAM	Outer_Full	22.58
n5	10	15	836.5	CP	256QAM	Inner_Full	20.33
n5	10	15	836.5	CP	256QAM	Edge_1RB_Left	17.86
n5	10	15	836.5	CP	256QAM	Edge_1RB_Right	17.80
n5	10	15	836.5	CP	256QAM	Outer_Full	20.05
n5	10	15	844	DFT	QPSK	Inner_Full	24.34
n5	10	15	844	DFT	QPSK	Edge_1RB_Left	21.56



BAND	BW(MHz)	SCS(kHz)	FREQ(MHz)	OFDM	MODULATION	RB LOCATION	POWER(dBm)
n5	10	15	844	DFT	QPSK	Edge_1RB_Right	21.39
n5	10	15	844	DFT	QPSK	Outer_Full	23.97
n5	10	15	844	DFT	16QAM	Inner_Full	23.94
n5	10	15	844	DFT	16QAM	Edge_1RB_Left	22.80
n5	10	15	844	DFT	16QAM	Edge_1RB_Right	22.60
n5	10	15	844	DFT	16QAM	Outer_Full	23.06
n5	10	15	844	DFT	64QAM	Inner_Full	22.78
n5	10	15	844	DFT	64QAM	Edge_1RB_Left	22.00
n5	10	15	844	DFT	64QAM	Edge_1RB_Right	21.77
n5	10	15	844	DFT	64QAM	Outer_Full	22.57
n5	10	15	844	DFT	256QAM	Inner_Full	21.08
n5	10	15	844	DFT	256QAM	Edge_1RB_Left	19.76
n5	10	15	844	DFT	256QAM	Edge_1RB_Right	19.51
n5	10	15	844	DFT	256QAM	Outer_Full	21.14
n5	10	15	844	CP	QPSK	Inner_Full	23.58
n5	10	15	844	CP	QPSK	Edge_1RB_Left	21.62
n5	10	15	844	CP	QPSK	Edge_1RB_Right	21.46
n5	10	15	844	CP	QPSK	Outer_Full	22.53
n5	10	15	844	CP	16QAM	Inner_Full	23.19
n5	10	15	844	CP	16QAM	Edge_1RB_Left	22.00
n5	10	15	844	CP	16QAM	Edge_1RB_Right	21.82
n5	10	15	844	CP	16QAM	Outer_Full	22.47
n5	10	15	844	CP	64QAM	Inner_Full	22.65
n5	10	15	844	CP	64QAM	Edge_1RB_Left	20.80
n5	10	15	844	CP	64QAM	Edge_1RB_Right	20.57
n5	10	15	844	CP	64QAM	Outer_Full	22.64
n5	10	15	844	CP	256QAM	Inner_Full	20.14
n5	10	15	844	CP	256QAM	Edge_1RB_Left	17.84
n5	10	15	844	CP	256QAM	Edge_1RB_Right	17.58
n5	10	15	844	CP	256QAM	Outer_Full	20.02
n5	15	15	831.5	DFT	QPSK	Inner_Full	24.55
n5	15	15	831.5	DFT	QPSK	Edge_1RB_Left	21.86
n5	15	15	831.5	DFT	QPSK	Edge_1RB_Right	21.69
n5	15	15	831.5	DFT	QPSK	Outer_Full	23.48
n5	15	15	831.5	DFT	16QAM	Inner_Full	23.62
n5	15	15	831.5	DFT	16QAM	Edge_1RB_Left	22.86
n5	15	15	831.5	DFT	16QAM	Edge_1RB_Right	22.93
n5	15	15	831.5	DFT	16QAM	Outer_Full	22.70
n5	15	15	831.5	DFT	64QAM	Inner_Full	22.28
n5	15	15	831.5	DFT	64QAM	Edge_1RB_Left	21.90
n5	15	15	831.5	DFT	64QAM	Edge_1RB_Right	22.05



BAND	BW(MHz)	SCS(kHz)	FREQ(MHz)	OFDM	MODULATION	RB LOCATION	POWER(dBm)
n5	15	15	831.5	DFT	64QAM	Outer_Full	22.30
n5	15	15	831.5	DFT	256QAM	Inner_Full	20.81
n5	15	15	831.5	DFT	256QAM	Edge_1RB_Left	20.07
n5	15	15	831.5	DFT	256QAM	Edge_1RB_Right	19.97
n5	15	15	831.5	DFT	256QAM	Outer_Full	20.76
n5	15	15	831.5	CP	QPSK	Inner_Full	23.10
n5	15	15	831.5	CP	QPSK	Edge_1RB_Left	21.86
n5	15	15	831.5	CP	QPSK	Edge_1RB_Right	21.69
n5	15	15	831.5	CP	QPSK	Outer_Full	22.18
n5	15	15	831.5	CP	16QAM	Inner_Full	22.65
n5	15	15	831.5	CP	16QAM	Edge_1RB_Left	22.32
n5	15	15	831.5	CP	16QAM	Edge_1RB_Right	22.11
n5	15	15	831.5	CP	16QAM	Outer_Full	22.20
n5	15	15	831.5	CP	64QAM	Inner_Full	22.26
n5	15	15	831.5	CP	64QAM	Edge_1RB_Left	21.06
n5	15	15	831.5	CP	64QAM	Edge_1RB_Right	21.03
n5	15	15	831.5	CP	64QAM	Outer_Full	22.24
n5	15	15	831.5	CP	256QAM	Inner_Full	19.80
n5	15	15	831.5	CP	256QAM	Edge_1RB_Left	18.03
n5	15	15	831.5	CP	256QAM	Edge_1RB_Right	18.01
n5	15	15	831.5	CP	256QAM	Outer_Full	19.82
n5	15	15	836.5	DFT	QPSK	Inner_Full	24.46
n5	15	15	836.5	DFT	QPSK	Edge_1RB_Left	21.84
n5	15	15	836.5	DFT	QPSK	Edge_1RB_Right	21.55
n5	15	15	836.5	DFT	QPSK	Outer_Full	23.88
n5	15	15	836.5	DFT	16QAM	Inner_Full	24.13
n5	15	15	836.5	DFT	16QAM	Edge_1RB_Left	22.61
n5	15	15	836.5	DFT	16QAM	Edge_1RB_Right	22.83
n5	15	15	836.5	DFT	16QAM	Outer_Full	23.02
n5	15	15	836.5	DFT	64QAM	Inner_Full	22.86
n5	15	15	836.5	DFT	64QAM	Edge_1RB_Left	21.75
n5	15	15	836.5	DFT	64QAM	Edge_1RB_Right	21.95
n5	15	15	836.5	DFT	64QAM	Outer_Full	22.55
n5	15	15	836.5	DFT	256QAM	Inner_Full	21.24
n5	15	15	836.5	DFT	256QAM	Edge_1RB_Left	20.02
n5	15	15	836.5	DFT	256QAM	Edge_1RB_Right	19.82
n5	15	15	836.5	DFT	256QAM	Outer_Full	20.97
n5	15	15	836.5	CP	QPSK	Inner_Full	23.62
n5	15	15	836.5	CP	QPSK	Edge_1RB_Left	21.82
n5	15	15	836.5	CP	QPSK	Edge_1RB_Right	21.62
n5	15	15	836.5	CP	QPSK	Outer_Full	22.51



BAND	BW(MHz)	SCS(kHz)	FREQ(MHz)	OFDM	MODULATION	RB LOCATION	POWER(dBm)
n5	15	15	836.5	CP	16QAM	Inner_Full	23.18
n5	15	15	836.5	CP	16QAM	Edge_1RB_Left	22.08
n5	15	15	836.5	CP	16QAM	Edge_1RB_Right	21.95
n5	15	15	836.5	CP	16QAM	Outer_Full	22.45
n5	15	15	836.5	CP	64QAM	Inner_Full	22.94
n5	15	15	836.5	CP	64QAM	Edge_1RB_Left	21.13
n5	15	15	836.5	CP	64QAM	Edge_1RB_Right	20.88
n5	15	15	836.5	CP	64QAM	Outer_Full	22.51
n5	15	15	836.5	CP	256QAM	Inner_Full	20.30
n5	15	15	836.5	CP	256QAM	Edge_1RB_Left	18.06
n5	15	15	836.5	CP	256QAM	Edge_1RB_Right	17.86
n5	15	15	836.5	CP	256QAM	Outer_Full	20.03
n5	15	15	841.5	DFT	QPSK	Inner_Full	24.30
n5	15	15	841.5	DFT	QPSK	Edge_1RB_Left	21.71
n5	15	15	841.5	DFT	QPSK	Edge_1RB_Right	21.39
n5	15	15	841.5	DFT	QPSK	Outer_Full	24.10
n5	15	15	841.5	DFT	16QAM	Inner_Full	23.90
n5	15	15	841.5	DFT	16QAM	Edge_1RB_Left	22.92
n5	15	15	841.5	DFT	16QAM	Edge_1RB_Right	22.66
n5	15	15	841.5	DFT	16QAM	Outer_Full	23.09
n5	15	15	841.5	DFT	64QAM	Inner_Full	22.87
n5	15	15	841.5	DFT	64QAM	Edge_1RB_Left	22.10
n5	15	15	841.5	DFT	64QAM	Edge_1RB_Right	21.79
n5	15	15	841.5	DFT	64QAM	Outer_Full	22.61
n5	15	15	841.5	DFT	256QAM	Inner_Full	21.27
n5	15	15	841.5	DFT	256QAM	Edge_1RB_Left	19.95
n5	15	15	841.5	DFT	256QAM	Edge_1RB_Right	19.66
n5	15	15	841.5	DFT	256QAM	Outer_Full	21.15
n5	15	15	841.5	CP	QPSK	Inner_Full	23.62
n5	15	15	841.5	CP	QPSK	Edge_1RB_Left	21.72
n5	15	15	841.5	CP	QPSK	Edge_1RB_Right	21.46
n5	15	15	841.5	CP	QPSK	Outer_Full	22.58
n5	15	15	841.5	CP	16QAM	Inner_Full	23.18
n5	15	15	841.5	CP	16QAM	Edge_1RB_Left	22.17
n5	15	15	841.5	CP	16QAM	Edge_1RB_Right	21.85
n5	15	15	841.5	CP	16QAM	Outer_Full	22.49
n5	15	15	841.5	CP	64QAM	Inner_Full	22.76
n5	15	15	841.5	CP	64QAM	Edge_1RB_Left	21.03
n5	15	15	841.5	CP	64QAM	Edge_1RB_Right	20.70
n5	15	15	841.5	CP	64QAM	Outer_Full	22.63
n5	15	15	841.5	CP	256QAM	Inner_Full	20.31



BAND	BW(MHz)	SCS(kHz)	FREQ(MHz)	OFDM	MODULATION	RB LOCATION	POWER(dBm)
n5	15	15	841.5	CP	256QAM	Edge_1RB_Left	17.98
n5	15	15	841.5	CP	256QAM	Edge_1RB_Right	17.74
n5	15	15	841.5	CP	256QAM	Outer_Full	20.11
n5	20	15	834	DFT	QPSK	Inner_Full	24.43
n5	20	15	834	DFT	QPSK	Edge_1RB_Left	21.85
n5	20	15	834	DFT	QPSK	Edge_1RB_Right	21.51
n5	20	15	834	DFT	QPSK	Outer_Full	23.66
n5	20	15	834	DFT	16QAM	Inner_Full	23.70
n5	20	15	834	DFT	16QAM	Edge_1RB_Left	22.81
n5	20	15	834	DFT	16QAM	Edge_1RB_Right	22.81
n5	20	15	834	DFT	16QAM	Outer_Full	22.83
n5	20	15	834	DFT	64QAM	Inner_Full	22.43
n5	20	15	834	DFT	64QAM	Edge_1RB_Left	21.91
n5	20	15	834	DFT	64QAM	Edge_1RB_Right	21.86
n5	20	15	834	DFT	64QAM	Outer_Full	22.37
n5	20	15	834	DFT	256QAM	Inner_Full	20.87
n5	20	15	834	DFT	256QAM	Edge_1RB_Left	20.00
n5	20	15	834	DFT	256QAM	Edge_1RB_Right	19.74
n5	20	15	834	DFT	256QAM	Outer_Full	20.82
n5	20	15	834	CP	QPSK	Inner_Full	23.36
n5	20	15	834	CP	QPSK	Edge_1RB_Left	21.81
n5	20	15	834	CP	QPSK	Edge_1RB_Right	21.57
n5	20	15	834	CP	QPSK	Outer_Full	22.25
n5	20	15	834	CP	16QAM	Inner_Full	22.88
n5	20	15	834	CP	16QAM	Edge_1RB_Left	22.13
n5	20	15	834	CP	16QAM	Edge_1RB_Right	21.96
n5	20	15	834	CP	16QAM	Outer_Full	22.23
n5	20	15	834	CP	64QAM	Inner_Full	22.52
n5	20	15	834	CP	64QAM	Edge_1RB_Left	21.07
n5	20	15	834	CP	64QAM	Edge_1RB_Right	20.96
n5	20	15	834	CP	64QAM	Outer_Full	22.32
n5	20	15	834	CP	256QAM	Inner_Full	19.98
n5	20	15	834	CP	256QAM	Edge_1RB_Left	17.90
n5	20	15	834	CP	256QAM	Edge_1RB_Right	17.81
n5	20	15	834	CP	256QAM	Outer_Full	19.85
n5	20	15	836.5	DFT	QPSK	Inner_Full	24.30
n5	20	15	836.5	DFT	QPSK	Edge_1RB_Left	21.80
n5	20	15	836.5	DFT	QPSK	Edge_1RB_Right	21.48
n5	20	15	836.5	DFT	QPSK	Outer_Full	23.78
n5	20	15	836.5	DFT	16QAM	Inner_Full	23.91
n5	20	15	836.5	DFT	16QAM	Edge_1RB_Left	22.61



BAND	BW(MHz)	SCS(kHz)	FREQ(MHz)	OFDM	MODULATION	RB LOCATION	POWER(dBm)
n5	20	15	836.5	DFT	16QAM	Edge_1RB_Right	22.68
n5	20	15	836.5	DFT	16QAM	Outer_Full	22.83
n5	20	15	836.5	DFT	64QAM	Inner_Full	22.81
n5	20	15	836.5	DFT	64QAM	Edge_1RB_Left	21.65
n5	20	15	836.5	DFT	64QAM	Edge_1RB_Right	21.83
n5	20	15	836.5	DFT	64QAM	Outer_Full	22.42
n5	20	15	836.5	DFT	256QAM	Inner_Full	21.15
n5	20	15	836.5	DFT	256QAM	Edge_1RB_Left	19.97
n5	20	15	836.5	DFT	256QAM	Edge_1RB_Right	19.70
n5	20	15	836.5	DFT	256QAM	Outer_Full	20.84
n5	20	15	836.5	CP	QPSK	Inner_Full	23.61
n5	20	15	836.5	CP	QPSK	Edge_1RB_Left	21.71
n5	20	15	836.5	CP	QPSK	Edge_1RB_Right	21.51
n5	20	15	836.5	CP	QPSK	Outer_Full	22.33
n5	20	15	836.5	CP	16QAM	Inner_Full	23.05
n5	20	15	836.5	CP	16QAM	Edge_1RB_Left	22.08
n5	20	15	836.5	CP	16QAM	Edge_1RB_Right	21.86
n5	20	15	836.5	CP	16QAM	Outer_Full	22.29
n5	20	15	836.5	CP	64QAM	Inner_Full	22.82
n5	20	15	836.5	CP	64QAM	Edge_1RB_Left	21.06
n5	20	15	836.5	CP	64QAM	Edge_1RB_Right	20.81
n5	20	15	836.5	CP	64QAM	Outer_Full	22.35
n5	20	15	836.5	CP	256QAM	Inner_Full	20.24
n5	20	15	836.5	CP	256QAM	Edge_1RB_Left	17.94
n5	20	15	836.5	CP	256QAM	Edge_1RB_Right	17.78
n5	20	15	836.5	CP	256QAM	Outer_Full	19.90
n5	20	15	839	DFT	QPSK	Inner_Full	24.24
n5	20	15	839	DFT	QPSK	Edge_1RB_Left	21.73
n5	20	15	839	DFT	QPSK	Edge_1RB_Right	21.32
n5	20	15	839	DFT	QPSK	Outer_Full	23.88
n5	20	15	839	DFT	16QAM	Inner_Full	23.95
n5	20	15	839	DFT	16QAM	Edge_1RB_Left	22.32
n5	20	15	839	DFT	16QAM	Edge_1RB_Right	22.63
n5	20	15	839	DFT	16QAM	Outer_Full	22.91
n5	20	15	839	DFT	64QAM	Inner_Full	22.84
n5	20	15	839	DFT	64QAM	Edge_1RB_Left	21.40
n5	20	15	839	DFT	64QAM	Edge_1RB_Right	21.76
n5	20	15	839	DFT	64QAM	Outer_Full	22.46
n5	20	15	839	DFT	256QAM	Inner_Full	21.16
n5	20	15	839	DFT	256QAM	Edge_1RB_Left	19.82
n5	20	15	839	DFT	256QAM	Edge_1RB_Right	19.58



BAND	BW(MHz)	SCS(kHz)	FREQ(MHz)	OFDM	MODULATION	RB LOCATION	POWER(dBm)
n5	20	15	839	DFT	256QAM	Outer_Full	20.96
n5	20	15	839	CP	QPSK	Inner_Full	23.71
n5	20	15	839	CP	QPSK	Edge_1RB_Left	21.53
n5	20	15	839	CP	QPSK	Edge_1RB_Right	21.43
n5	20	15	839	CP	QPSK	Outer_Full	22.40
n5	20	15	839	CP	16QAM	Inner_Full	23.19
n5	20	15	839	CP	16QAM	Edge_1RB_Left	21.83
n5	20	15	839	CP	16QAM	Edge_1RB_Right	21.81
n5	20	15	839	CP	16QAM	Outer_Full	22.32
n5	20	15	839	CP	64QAM	Inner_Full	23.00
n5	20	15	839	CP	64QAM	Edge_1RB_Left	21.05
n5	20	15	839	CP	64QAM	Edge_1RB_Right	20.68
n5	20	15	839	CP	64QAM	Outer_Full	22.42
n5	20	15	839	CP	256QAM	Inner_Full	20.18
n5	20	15	839	CP	256QAM	Edge_1RB_Left	18.00
n5	20	15	839	CP	256QAM	Edge_1RB_Right	17.73
n5	20	15	839	CP	256QAM	Outer_Full	19.99



n7

BAND	BW(MHz)	SCS(kHz)	FREQ(MHz)	OFDM	MODULATION	RB LOCATION	POWER(dBm)
n7	5	15	2502.5	DFT	QPSK	Inner_Full	23.01
n7	5	15	2502.5	DFT	QPSK	Edge_1RB_Left	20.61
n7	5	15	2502.5	DFT	QPSK	Edge_1RB_Right	20.59
n7	5	15	2502.5	DFT	QPSK	Outer_Full	21.97
n7	5	15	2502.5	DFT	16QAM	Inner_Full	21.87
n7	5	15	2502.5	DFT	16QAM	Edge_1RB_Left	21.01
n7	5	15	2502.5	DFT	16QAM	Edge_1RB_Right	20.98
n7	5	15	2502.5	DFT	16QAM	Outer_Full	20.76
n7	5	15	2502.5	DFT	64QAM	Inner_Full	20.39
n7	5	15	2502.5	DFT	64QAM	Edge_1RB_Left	20.02
n7	5	15	2502.5	DFT	64QAM	Edge_1RB_Right	20.09
n7	5	15	2502.5	DFT	64QAM	Outer_Full	20.48
n7	5	15	2502.5	DFT	256QAM	Inner_Full	17.76
n7	5	15	2502.5	DFT	256QAM	Edge_1RB_Left	17.44
n7	5	15	2502.5	DFT	256QAM	Edge_1RB_Right	17.45
n7	5	15	2502.5	DFT	256QAM	Outer_Full	17.82
n7	5	15	2502.5	CP	QPSK	Inner_Full	21.57
n7	5	15	2502.5	CP	QPSK	Edge_1RB_Left	19.85
n7	5	15	2502.5	CP	QPSK	Edge_1RB_Right	19.84
n7	5	15	2502.5	CP	QPSK	Outer_Full	19.39
n7	5	15	2502.5	CP	16QAM	Inner_Full	21.02
n7	5	15	2502.5	CP	16QAM	Edge_1RB_Left	20.26
n7	5	15	2502.5	CP	16QAM	Edge_1RB_Right	20.24
n7	5	15	2502.5	CP	16QAM	Outer_Full	19.42
n7	5	15	2502.5	CP	64QAM	Inner_Full	19.23
n7	5	15	2502.5	CP	64QAM	Edge_1RB_Left	18.95
n7	5	15	2502.5	CP	64QAM	Edge_1RB_Right	19.04
n7	5	15	2502.5	CP	64QAM	Outer_Full	18.43
n7	5	15	2502.5	CP	256QAM	Inner_Full	16.39
n7	5	15	2502.5	CP	256QAM	Edge_1RB_Left	16.06
n7	5	15	2502.5	CP	256QAM	Edge_1RB_Right	16.00
n7	5	15	2502.5	CP	256QAM	Outer_Full	16.31
n7	5	15	2535	DFT	QPSK	Inner_Full	23.12
n7	5	15	2535	DFT	QPSK	Edge_1RB_Left	20.59
n7	5	15	2535	DFT	QPSK	Edge_1RB_Right	20.62
n7	5	15	2535	DFT	QPSK	Outer_Full	22.01
n7	5	15	2535	DFT	16QAM	Inner_Full	21.92
n7	5	15	2535	DFT	16QAM	Edge_1RB_Left	21.09
n7	5	15	2535	DFT	16QAM	Edge_1RB_Right	21.09



BAND	BW(MHz)	SCS(kHz)	FREQ(MHz)	OFDM	MODULATION	RB LOCATION	POWER(dBm)
n7	5	15	2535	DFT	16QAM	Outer_Full	20.88
n7	5	15	2535	DFT	64QAM	Inner_Full	20.43
n7	5	15	2535	DFT	64QAM	Edge_1RB_Left	20.24
n7	5	15	2535	DFT	64QAM	Edge_1RB_Right	20.20
n7	5	15	2535	DFT	64QAM	Outer_Full	20.48
n7	5	15	2535	DFT	256QAM	Inner_Full	17.89
n7	5	15	2535	DFT	256QAM	Edge_1RB_Left	17.48
n7	5	15	2535	DFT	256QAM	Edge_1RB_Right	17.50
n7	5	15	2535	DFT	256QAM	Outer_Full	17.80
n7	5	15	2535	CP	QPSK	Inner_Full	21.59
n7	5	15	2535	CP	QPSK	Edge_1RB_Left	19.86
n7	5	15	2535	CP	QPSK	Edge_1RB_Right	19.85
n7	5	15	2535	CP	QPSK	Outer_Full	19.42
n7	5	15	2535	CP	16QAM	Inner_Full	21.07
n7	5	15	2535	CP	16QAM	Edge_1RB_Left	20.31
n7	5	15	2535	CP	16QAM	Edge_1RB_Right	20.28
n7	5	15	2535	CP	16QAM	Outer_Full	19.48
n7	5	15	2535	CP	64QAM	Inner_Full	19.29
n7	5	15	2535	CP	64QAM	Edge_1RB_Left	19.07
n7	5	15	2535	CP	64QAM	Edge_1RB_Right	19.06
n7	5	15	2535	CP	64QAM	Outer_Full	18.42
n7	5	15	2535	CP	256QAM	Inner_Full	16.49
n7	5	15	2535	CP	256QAM	Edge_1RB_Left	16.11
n7	5	15	2535	CP	256QAM	Edge_1RB_Right	16.14
n7	5	15	2535	CP	256QAM	Outer_Full	16.35
n7	5	15	2567.5	DFT	QPSK	Inner_Full	23.02
n7	5	15	2567.5	DFT	QPSK	Edge_1RB_Left	20.53
n7	5	15	2567.5	DFT	QPSK	Edge_1RB_Right	20.53
n7	5	15	2567.5	DFT	QPSK	Outer_Full	21.93
n7	5	15	2567.5	DFT	16QAM	Inner_Full	21.80
n7	5	15	2567.5	DFT	16QAM	Edge_1RB_Left	20.97
n7	5	15	2567.5	DFT	16QAM	Edge_1RB_Right	21.01
n7	5	15	2567.5	DFT	16QAM	Outer_Full	20.77
n7	5	15	2567.5	DFT	64QAM	Inner_Full	20.40
n7	5	15	2567.5	DFT	64QAM	Edge_1RB_Left	20.14
n7	5	15	2567.5	DFT	64QAM	Edge_1RB_Right	20.10
n7	5	15	2567.5	DFT	64QAM	Outer_Full	20.43
n7	5	15	2567.5	DFT	256QAM	Inner_Full	17.69
n7	5	15	2567.5	DFT	256QAM	Edge_1RB_Left	17.38
n7	5	15	2567.5	DFT	256QAM	Edge_1RB_Right	17.39
n7	5	15	2567.5	DFT	256QAM	Outer_Full	17.72



BAND	BW(MHz)	SCS(kHz)	FREQ(MHz)	OFDM	MODULATION	RB LOCATION	POWER(dBm)
n7	5	15	2567.5	CP	QPSK	Inner_Full	21.42
n7	5	15	2567.5	CP	QPSK	Edge_1RB_Left	19.75
n7	5	15	2567.5	CP	QPSK	Edge_1RB_Right	19.76
n7	5	15	2567.5	CP	QPSK	Outer_Full	19.34
n7	5	15	2567.5	CP	16QAM	Inner_Full	20.99
n7	5	15	2567.5	CP	16QAM	Edge_1RB_Left	20.20
n7	5	15	2567.5	CP	16QAM	Edge_1RB_Right	20.25
n7	5	15	2567.5	CP	16QAM	Outer_Full	19.41
n7	5	15	2567.5	CP	64QAM	Inner_Full	19.24
n7	5	15	2567.5	CP	64QAM	Edge_1RB_Left	18.96
n7	5	15	2567.5	CP	64QAM	Edge_1RB_Right	18.96
n7	5	15	2567.5	CP	64QAM	Outer_Full	18.39
n7	5	15	2567.5	CP	256QAM	Inner_Full	16.36
n7	5	15	2567.5	CP	256QAM	Edge_1RB_Left	16.00
n7	5	15	2567.5	CP	256QAM	Edge_1RB_Right	15.98
n7	5	15	2567.5	CP	256QAM	Outer_Full	16.33
n7	10	15	2505	DFT	QPSK	Inner_Full	23.03
n7	10	15	2505	DFT	QPSK	Edge_1RB_Left	20.45
n7	10	15	2505	DFT	QPSK	Edge_1RB_Right	20.50
n7	10	15	2505	DFT	QPSK	Outer_Full	21.93
n7	10	15	2505	DFT	16QAM	Inner_Full	21.80
n7	10	15	2505	DFT	16QAM	Edge_1RB_Left	20.93
n7	10	15	2505	DFT	16QAM	Edge_1RB_Right	20.98
n7	10	15	2505	DFT	16QAM	Outer_Full	20.70
n7	10	15	2505	DFT	64QAM	Inner_Full	20.43
n7	10	15	2505	DFT	64QAM	Edge_1RB_Left	20.08
n7	10	15	2505	DFT	64QAM	Edge_1RB_Right	20.18
n7	10	15	2505	DFT	64QAM	Outer_Full	20.30
n7	10	15	2505	DFT	256QAM	Inner_Full	17.75
n7	10	15	2505	DFT	256QAM	Edge_1RB_Left	17.45
n7	10	15	2505	DFT	256QAM	Edge_1RB_Right	17.41
n7	10	15	2505	DFT	256QAM	Outer_Full	17.77
n7	10	15	2505	CP	QPSK	Inner_Full	21.39
n7	10	15	2505	CP	QPSK	Edge_1RB_Left	19.80
n7	10	15	2505	CP	QPSK	Edge_1RB_Right	19.82
n7	10	15	2505	CP	QPSK	Outer_Full	19.38
n7	10	15	2505	CP	16QAM	Inner_Full	20.88
n7	10	15	2505	CP	16QAM	Edge_1RB_Left	20.07
n7	10	15	2505	CP	16QAM	Edge_1RB_Right	20.19
n7	10	15	2505	CP	16QAM	Outer_Full	19.45
n7	10	15	2505	CP	64QAM	Inner_Full	19.28



BAND	BW(MHz)	SCS(kHz)	FREQ(MHz)	OFDM	MODULATION	RB LOCATION	POWER(dBm)
n7	10	15	2505	CP	64QAM	Edge_1RB_Left	18.89
n7	10	15	2505	CP	64QAM	Edge_1RB_Right	18.99
n7	10	15	2505	CP	64QAM	Outer_Full	18.39
n7	10	15	2505	CP	256QAM	Inner_Full	16.23
n7	10	15	2505	CP	256QAM	Edge_1RB_Left	15.94
n7	10	15	2505	CP	256QAM	Edge_1RB_Right	15.98
n7	10	15	2505	CP	256QAM	Outer_Full	16.25
n7	10	15	2535	DFT	QPSK	Inner_Full	23.09
n7	10	15	2535	DFT	QPSK	Edge_1RB_Left	20.64
n7	10	15	2535	DFT	QPSK	Edge_1RB_Right	20.64
n7	10	15	2535	DFT	QPSK	Outer_Full	21.96
n7	10	15	2535	DFT	16QAM	Inner_Full	21.87
n7	10	15	2535	DFT	16QAM	Edge_1RB_Left	21.04
n7	10	15	2535	DFT	16QAM	Edge_1RB_Right	20.95
n7	10	15	2535	DFT	16QAM	Outer_Full	20.86
n7	10	15	2535	DFT	64QAM	Inner_Full	20.43
n7	10	15	2535	DFT	64QAM	Edge_1RB_Left	20.20
n7	10	15	2535	DFT	64QAM	Edge_1RB_Right	20.06
n7	10	15	2535	DFT	64QAM	Outer_Full	20.42
n7	10	15	2535	DFT	256QAM	Inner_Full	17.73
n7	10	15	2535	DFT	256QAM	Edge_1RB_Left	17.51
n7	10	15	2535	DFT	256QAM	Edge_1RB_Right	17.44
n7	10	15	2535	DFT	256QAM	Outer_Full	17.88
n7	10	15	2535	CP	QPSK	Inner_Full	21.53
n7	10	15	2535	CP	QPSK	Edge_1RB_Left	19.89
n7	10	15	2535	CP	QPSK	Edge_1RB_Right	19.87
n7	10	15	2535	CP	QPSK	Outer_Full	19.49
n7	10	15	2535	CP	16QAM	Inner_Full	20.92
n7	10	15	2535	CP	16QAM	Edge_1RB_Left	20.19
n7	10	15	2535	CP	16QAM	Edge_1RB_Right	20.15
n7	10	15	2535	CP	16QAM	Outer_Full	19.52
n7	10	15	2535	CP	64QAM	Inner_Full	19.39
n7	10	15	2535	CP	64QAM	Edge_1RB_Left	19.00
n7	10	15	2535	CP	64QAM	Edge_1RB_Right	18.98
n7	10	15	2535	CP	64QAM	Outer_Full	18.43
n7	10	15	2535	CP	256QAM	Inner_Full	16.35
n7	10	15	2535	CP	256QAM	Edge_1RB_Left	16.01
n7	10	15	2535	CP	256QAM	Edge_1RB_Right	15.92
n7	10	15	2535	CP	256QAM	Outer_Full	16.31
n7	10	15	2565	DFT	QPSK	Inner_Full	22.86
n7	10	15	2565	DFT	QPSK	Edge_1RB_Left	20.61



BAND	BW(MHz)	SCS(kHz)	FREQ(MHz)	OFDM	MODULATION	RB LOCATION	POWER(dBm)
n7	10	15	2565	DFT	QPSK	Edge_1RB_Right	20.54
n7	10	15	2565	DFT	QPSK	Outer_Full	21.88
n7	10	15	2565	DFT	16QAM	Inner_Full	21.81
n7	10	15	2565	DFT	16QAM	Edge_1RB_Left	21.04
n7	10	15	2565	DFT	16QAM	Edge_1RB_Right	20.97
n7	10	15	2565	DFT	16QAM	Outer_Full	20.72
n7	10	15	2565	DFT	64QAM	Inner_Full	20.39
n7	10	15	2565	DFT	64QAM	Edge_1RB_Left	20.18
n7	10	15	2565	DFT	64QAM	Edge_1RB_Right	20.09
n7	10	15	2565	DFT	64QAM	Outer_Full	20.33
n7	10	15	2565	DFT	256QAM	Inner_Full	17.66
n7	10	15	2565	DFT	256QAM	Edge_1RB_Left	17.47
n7	10	15	2565	DFT	256QAM	Edge_1RB_Right	17.35
n7	10	15	2565	DFT	256QAM	Outer_Full	17.76
n7	10	15	2565	CP	QPSK	Inner_Full	21.31
n7	10	15	2565	CP	QPSK	Edge_1RB_Left	19.78
n7	10	15	2565	CP	QPSK	Edge_1RB_Right	19.75
n7	10	15	2565	CP	QPSK	Outer_Full	19.38
n7	10	15	2565	CP	16QAM	Inner_Full	20.89
n7	10	15	2565	CP	16QAM	Edge_1RB_Left	20.23
n7	10	15	2565	CP	16QAM	Edge_1RB_Right	20.15
n7	10	15	2565	CP	16QAM	Outer_Full	19.46
n7	10	15	2565	CP	64QAM	Inner_Full	19.34
n7	10	15	2565	CP	64QAM	Edge_1RB_Left	18.99
n7	10	15	2565	CP	64QAM	Edge_1RB_Right	18.99
n7	10	15	2565	CP	64QAM	Outer_Full	18.38
n7	10	15	2565	CP	256QAM	Inner_Full	16.30
n7	10	15	2565	CP	256QAM	Edge_1RB_Left	16.04
n7	10	15	2565	CP	256QAM	Edge_1RB_Right	15.92
n7	10	15	2565	CP	256QAM	Outer_Full	16.26
n7	15	15	2507.5	DFT	QPSK	Inner_Full	23.05
n7	15	15	2507.5	DFT	QPSK	Edge_1RB_Left	20.48
n7	15	15	2507.5	DFT	QPSK	Edge_1RB_Right	20.55
n7	15	15	2507.5	DFT	QPSK	Outer_Full	21.88
n7	15	15	2507.5	DFT	16QAM	Inner_Full	21.69
n7	15	15	2507.5	DFT	16QAM	Edge_1RB_Left	20.96
n7	15	15	2507.5	DFT	16QAM	Edge_1RB_Right	21.04
n7	15	15	2507.5	DFT	16QAM	Outer_Full	20.66
n7	15	15	2507.5	DFT	64QAM	Inner_Full	20.28
n7	15	15	2507.5	DFT	64QAM	Edge_1RB_Left	20.09
n7	15	15	2507.5	DFT	64QAM	Edge_1RB_Right	20.14



BAND	BW(MHz)	SCS(kHz)	FREQ(MHz)	OFDM	MODULATION	RB LOCATION	POWER(dBm)
n7	15	15	2507.5	DFT	64QAM	Outer_Full	20.21
n7	15	15	2507.5	DFT	256QAM	Inner_Full	17.68
n7	15	15	2507.5	DFT	256QAM	Edge_1RB_Left	17.43
n7	15	15	2507.5	DFT	256QAM	Edge_1RB_Right	17.40
n7	15	15	2507.5	DFT	256QAM	Outer_Full	17.67
n7	15	15	2507.5	CP	QPSK	Inner_Full	21.64
n7	15	15	2507.5	CP	QPSK	Edge_1RB_Left	19.74
n7	15	15	2507.5	CP	QPSK	Edge_1RB_Right	19.80
n7	15	15	2507.5	CP	QPSK	Outer_Full	19.45
n7	15	15	2507.5	CP	16QAM	Inner_Full	21.02
n7	15	15	2507.5	CP	16QAM	Edge_1RB_Left	20.08
n7	15	15	2507.5	CP	16QAM	Edge_1RB_Right	20.19
n7	15	15	2507.5	CP	16QAM	Outer_Full	19.31
n7	15	15	2507.5	CP	64QAM	Inner_Full	19.30
n7	15	15	2507.5	CP	64QAM	Edge_1RB_Left	18.99
n7	15	15	2507.5	CP	64QAM	Edge_1RB_Right	19.09
n7	15	15	2507.5	CP	64QAM	Outer_Full	18.28
n7	15	15	2507.5	CP	256QAM	Inner_Full	16.27
n7	15	15	2507.5	CP	256QAM	Edge_1RB_Left	15.99
n7	15	15	2507.5	CP	256QAM	Edge_1RB_Right	16.00
n7	15	15	2507.5	CP	256QAM	Outer_Full	16.23
n7	15	15	2535	DFT	QPSK	Inner_Full	23.02
n7	15	15	2535	DFT	QPSK	Edge_1RB_Left	20.67
n7	15	15	2535	DFT	QPSK	Edge_1RB_Right	20.70
n7	15	15	2535	DFT	QPSK	Outer_Full	21.97
n7	15	15	2535	DFT	16QAM	Inner_Full	21.83
n7	15	15	2535	DFT	16QAM	Edge_1RB_Left	21.04
n7	15	15	2535	DFT	16QAM	Edge_1RB_Right	21.13
n7	15	15	2535	DFT	16QAM	Outer_Full	20.92
n7	15	15	2535	DFT	64QAM	Inner_Full	20.42
n7	15	15	2535	DFT	64QAM	Edge_1RB_Left	20.14
n7	15	15	2535	DFT	64QAM	Edge_1RB_Right	20.26
n7	15	15	2535	DFT	64QAM	Outer_Full	20.44
n7	15	15	2535	DFT	256QAM	Inner_Full	17.79
n7	15	15	2535	DFT	256QAM	Edge_1RB_Left	17.65
n7	15	15	2535	DFT	256QAM	Edge_1RB_Right	17.56
n7	15	15	2535	DFT	256QAM	Outer_Full	17.86
n7	15	15	2535	CP	QPSK	Inner_Full	21.60
n7	15	15	2535	CP	QPSK	Edge_1RB_Left	19.91
n7	15	15	2535	CP	QPSK	Edge_1RB_Right	19.90
n7	15	15	2535	CP	QPSK	Outer_Full	19.54



BAND	BW(MHz)	SCS(kHz)	FREQ(MHz)	OFDM	MODULATION	RB LOCATION	POWER(dBm)
n7	15	15	2535	CP	16QAM	Inner_Full	21.10
n7	15	15	2535	CP	16QAM	Edge_1RB_Left	20.21
n7	15	15	2535	CP	16QAM	Edge_1RB_Right	20.31
n7	15	15	2535	CP	16QAM	Outer_Full	19.50
n7	15	15	2535	CP	64QAM	Inner_Full	19.46
n7	15	15	2535	CP	64QAM	Edge_1RB_Left	19.13
n7	15	15	2535	CP	64QAM	Edge_1RB_Right	19.15
n7	15	15	2535	CP	64QAM	Outer_Full	18.45
n7	15	15	2535	CP	256QAM	Inner_Full	16.37
n7	15	15	2535	CP	256QAM	Edge_1RB_Left	16.14
n7	15	15	2535	CP	256QAM	Edge_1RB_Right	16.18
n7	15	15	2535	CP	256QAM	Outer_Full	16.33
n7	15	15	2562.5	DFT	QPSK	Inner_Full	23.05
n7	15	15	2562.5	DFT	QPSK	Edge_1RB_Left	20.74
n7	15	15	2562.5	DFT	QPSK	Edge_1RB_Right	20.60
n7	15	15	2562.5	DFT	QPSK	Outer_Full	21.94
n7	15	15	2562.5	DFT	16QAM	Inner_Full	21.75
n7	15	15	2562.5	DFT	16QAM	Edge_1RB_Left	21.07
n7	15	15	2562.5	DFT	16QAM	Edge_1RB_Right	21.03
n7	15	15	2562.5	DFT	16QAM	Outer_Full	20.82
n7	15	15	2562.5	DFT	64QAM	Inner_Full	20.34
n7	15	15	2562.5	DFT	64QAM	Edge_1RB_Left	20.21
n7	15	15	2562.5	DFT	64QAM	Edge_1RB_Right	20.05
n7	15	15	2562.5	DFT	64QAM	Outer_Full	20.42
n7	15	15	2562.5	DFT	256QAM	Inner_Full	17.84
n7	15	15	2562.5	DFT	256QAM	Edge_1RB_Left	17.61
n7	15	15	2562.5	DFT	256QAM	Edge_1RB_Right	17.45
n7	15	15	2562.5	DFT	256QAM	Outer_Full	17.72
n7	15	15	2562.5	CP	QPSK	Inner_Full	21.67
n7	15	15	2562.5	CP	QPSK	Edge_1RB_Left	19.97
n7	15	15	2562.5	CP	QPSK	Edge_1RB_Right	19.85
n7	15	15	2562.5	CP	QPSK	Outer_Full	19.40
n7	15	15	2562.5	CP	16QAM	Inner_Full	21.05
n7	15	15	2562.5	CP	16QAM	Edge_1RB_Left	20.24
n7	15	15	2562.5	CP	16QAM	Edge_1RB_Right	20.22
n7	15	15	2562.5	CP	16QAM	Outer_Full	19.40
n7	15	15	2562.5	CP	64QAM	Inner_Full	19.42
n7	15	15	2562.5	CP	64QAM	Edge_1RB_Left	19.12
n7	15	15	2562.5	CP	64QAM	Edge_1RB_Right	19.09
n7	15	15	2562.5	CP	64QAM	Outer_Full	18.37
n7	15	15	2562.5	CP	256QAM	Inner_Full	16.30



BAND	BW(MHz)	SCS(kHz)	FREQ(MHz)	OFDM	MODULATION	RB LOCATION	POWER(dBm)
n7	15	15	2562.5	CP	256QAM	Edge_1RB_Left	16.12
n7	15	15	2562.5	CP	256QAM	Edge_1RB_Right	16.00
n7	15	15	2562.5	CP	256QAM	Outer_Full	16.26
n7	20	15	2510	DFT	QPSK	Inner_Full	22.98
n7	20	15	2510	DFT	QPSK	Edge_1RB_Left	20.46
n7	20	15	2510	DFT	QPSK	Edge_1RB_Right	20.55
n7	20	15	2510	DFT	QPSK	Outer_Full	21.99
n7	20	15	2510	DFT	16QAM	Inner_Full	21.68
n7	20	15	2510	DFT	16QAM	Edge_1RB_Left	20.90
n7	20	15	2510	DFT	16QAM	Edge_1RB_Right	21.03
n7	20	15	2510	DFT	16QAM	Outer_Full	20.71
n7	20	15	2510	DFT	64QAM	Inner_Full	20.22
n7	20	15	2510	DFT	64QAM	Edge_1RB_Left	20.08
n7	20	15	2510	DFT	64QAM	Edge_1RB_Right	20.13
n7	20	15	2510	DFT	64QAM	Outer_Full	20.37
n7	20	15	2510	DFT	256QAM	Inner_Full	17.74
n7	20	15	2510	DFT	256QAM	Edge_1RB_Left	17.33
n7	20	15	2510	DFT	256QAM	Edge_1RB_Right	17.47
n7	20	15	2510	DFT	256QAM	Outer_Full	17.75
n7	20	15	2510	CP	QPSK	Inner_Full	21.50
n7	20	15	2510	CP	QPSK	Edge_1RB_Left	19.66
n7	20	15	2510	CP	QPSK	Edge_1RB_Right	19.88
n7	20	15	2510	CP	QPSK	Outer_Full	19.38
n7	20	15	2510	CP	16QAM	Inner_Full	20.91
n7	20	15	2510	CP	16QAM	Edge_1RB_Left	20.05
n7	20	15	2510	CP	16QAM	Edge_1RB_Right	20.31
n7	20	15	2510	CP	16QAM	Outer_Full	19.33
n7	20	15	2510	CP	64QAM	Inner_Full	19.31
n7	20	15	2510	CP	64QAM	Edge_1RB_Left	18.91
n7	20	15	2510	CP	64QAM	Edge_1RB_Right	19.10
n7	20	15	2510	CP	64QAM	Outer_Full	18.35
n7	20	15	2510	CP	256QAM	Inner_Full	16.09
n7	20	15	2510	CP	256QAM	Edge_1RB_Left	15.97
n7	20	15	2510	CP	256QAM	Edge_1RB_Right	16.02
n7	20	15	2510	CP	256QAM	Outer_Full	16.27
n7	20	15	2535	DFT	QPSK	Inner_Full	22.95
n7	20	15	2535	DFT	QPSK	Edge_1RB_Left	20.64
n7	20	15	2535	DFT	QPSK	Edge_1RB_Right	20.65
n7	20	15	2535	DFT	QPSK	Outer_Full	22.08
n7	20	15	2535	DFT	16QAM	Inner_Full	21.82
n7	20	15	2535	DFT	16QAM	Edge_1RB_Left	21.04



BAND	BW(MHz)	SCS(kHz)	FREQ(MHz)	OFDM	MODULATION	RB LOCATION	POWER(dBm)
n7	20	15	2535	DFT	16QAM	Edge_1RB_Right	21.11
n7	20	15	2535	DFT	16QAM	Outer_Full	20.84
n7	20	15	2535	DFT	64QAM	Inner_Full	20.42
n7	20	15	2535	DFT	64QAM	Edge_1RB_Left	20.17
n7	20	15	2535	DFT	64QAM	Edge_1RB_Right	20.20
n7	20	15	2535	DFT	64QAM	Outer_Full	20.42
n7	20	15	2535	DFT	256QAM	Inner_Full	17.75
n7	20	15	2535	DFT	256QAM	Edge_1RB_Left	17.54
n7	20	15	2535	DFT	256QAM	Edge_1RB_Right	17.54
n7	20	15	2535	DFT	256QAM	Outer_Full	17.90
n7	20	15	2535	CP	QPSK	Inner_Full	21.48
n7	20	15	2535	CP	QPSK	Edge_1RB_Left	19.91
n7	20	15	2535	CP	QPSK	Edge_1RB_Right	19.96
n7	20	15	2535	CP	QPSK	Outer_Full	19.52
n7	20	15	2535	CP	16QAM	Inner_Full	20.99
n7	20	15	2535	CP	16QAM	Edge_1RB_Left	20.22
n7	20	15	2535	CP	16QAM	Edge_1RB_Right	20.34
n7	20	15	2535	CP	16QAM	Outer_Full	19.46
n7	20	15	2535	CP	64QAM	Inner_Full	19.49
n7	20	15	2535	CP	64QAM	Edge_1RB_Left	19.14
n7	20	15	2535	CP	64QAM	Edge_1RB_Right	19.10
n7	20	15	2535	CP	64QAM	Outer_Full	18.47
n7	20	15	2535	CP	256QAM	Inner_Full	16.31
n7	20	15	2535	CP	256QAM	Edge_1RB_Left	15.98
n7	20	15	2535	CP	256QAM	Edge_1RB_Right	16.30
n7	20	15	2535	CP	256QAM	Outer_Full	16.41
n7	20	15	2560	DFT	QPSK	Inner_Full	22.98
n7	20	15	2560	DFT	QPSK	Edge_1RB_Left	20.72
n7	20	15	2560	DFT	QPSK	Edge_1RB_Right	20.48
n7	20	15	2560	DFT	QPSK	Outer_Full	22.04
n7	20	15	2560	DFT	16QAM	Inner_Full	21.78
n7	20	15	2560	DFT	16QAM	Edge_1RB_Left	20.99
n7	20	15	2560	DFT	16QAM	Edge_1RB_Right	20.92
n7	20	15	2560	DFT	16QAM	Outer_Full	20.89
n7	20	15	2560	DFT	64QAM	Inner_Full	20.38
n7	20	15	2560	DFT	64QAM	Edge_1RB_Left	20.21
n7	20	15	2560	DFT	64QAM	Edge_1RB_Right	20.00
n7	20	15	2560	DFT	64QAM	Outer_Full	20.36
n7	20	15	2560	DFT	256QAM	Inner_Full	17.77
n7	20	15	2560	DFT	256QAM	Edge_1RB_Left	17.57
n7	20	15	2560	DFT	256QAM	Edge_1RB_Right	17.36



BAND	BW(MHz)	SCS(kHz)	FREQ(MHz)	OFDM	MODULATION	RB LOCATION	POWER(dBm)
n7	20	15	2560	DFT	256QAM	Outer_Full	17.73
n7	20	15	2560	CP	QPSK	Inner_Full	21.50
n7	20	15	2560	CP	QPSK	Edge_1RB_Left	19.91
n7	20	15	2560	CP	QPSK	Edge_1RB_Right	19.83
n7	20	15	2560	CP	QPSK	Outer_Full	19.38
n7	20	15	2560	CP	16QAM	Inner_Full	20.89
n7	20	15	2560	CP	16QAM	Edge_1RB_Left	20.17
n7	20	15	2560	CP	16QAM	Edge_1RB_Right	20.11
n7	20	15	2560	CP	16QAM	Outer_Full	19.35
n7	20	15	2560	CP	64QAM	Inner_Full	19.48
n7	20	15	2560	CP	64QAM	Edge_1RB_Left	19.10
n7	20	15	2560	CP	64QAM	Edge_1RB_Right	18.99
n7	20	15	2560	CP	64QAM	Outer_Full	18.38
n7	20	15	2560	CP	256QAM	Inner_Full	16.27
n7	20	15	2560	CP	256QAM	Edge_1RB_Left	16.05
n7	20	15	2560	CP	256QAM	Edge_1RB_Right	15.99
n7	20	15	2560	CP	256QAM	Outer_Full	16.35
n7	25	15	2512.5	DFT	QPSK	Inner_Full	23.05
n7	25	15	2512.5	DFT	QPSK	Edge_1RB_Left	20.61
n7	25	15	2512.5	DFT	QPSK	Edge_1RB_Right	20.70
n7	25	15	2512.5	DFT	QPSK	Outer_Full	21.94
n7	25	15	2512.5	DFT	16QAM	Inner_Full	21.89
n7	25	15	2512.5	DFT	16QAM	Edge_1RB_Left	21.03
n7	25	15	2512.5	DFT	16QAM	Edge_1RB_Right	21.13
n7	25	15	2512.5	DFT	16QAM	Outer_Full	20.86
n7	25	15	2512.5	DFT	64QAM	Inner_Full	20.40
n7	25	15	2512.5	DFT	64QAM	Edge_1RB_Left	20.05
n7	25	15	2512.5	DFT	64QAM	Edge_1RB_Right	20.24
n7	25	15	2512.5	DFT	64QAM	Outer_Full	20.38
n7	25	15	2512.5	DFT	256QAM	Inner_Full	17.79
n7	25	15	2512.5	DFT	256QAM	Edge_1RB_Left	17.51
n7	25	15	2512.5	DFT	256QAM	Edge_1RB_Right	17.57
n7	25	15	2512.5	DFT	256QAM	Outer_Full	17.78
n7	25	15	2512.5	CP	QPSK	Inner_Full	21.61
n7	25	15	2512.5	CP	QPSK	Edge_1RB_Left	19.80
n7	25	15	2512.5	CP	QPSK	Edge_1RB_Right	19.92
n7	25	15	2512.5	CP	QPSK	Outer_Full	19.51
n7	25	15	2512.5	CP	16QAM	Inner_Full	20.91
n7	25	15	2512.5	CP	16QAM	Edge_1RB_Left	20.26
n7	25	15	2512.5	CP	16QAM	Edge_1RB_Right	20.33
n7	25	15	2512.5	CP	16QAM	Outer_Full	19.36



BAND	BW(MHz)	SCS(kHz)	FREQ(MHz)	OFDM	MODULATION	RB LOCATION	POWER(dBm)
n7	25	15	2512.5	CP	64QAM	Inner_Full	19.51
n7	25	15	2512.5	CP	64QAM	Edge_1RB_Left	19.09
n7	25	15	2512.5	CP	64QAM	Edge_1RB_Right	19.25
n7	25	15	2512.5	CP	64QAM	Outer_Full	18.38
n7	25	15	2512.5	CP	256QAM	Inner_Full	16.41
n7	25	15	2512.5	CP	256QAM	Edge_1RB_Left	16.15
n7	25	15	2512.5	CP	256QAM	Edge_1RB_Right	16.14
n7	25	15	2512.5	CP	256QAM	Outer_Full	16.32
n7	25	15	2535	DFT	QPSK	Inner_Full	23.14
n7	25	15	2535	DFT	QPSK	Edge_1RB_Left	20.74
n7	25	15	2535	DFT	QPSK	Edge_1RB_Right	20.81
n7	25	15	2535	DFT	QPSK	Outer_Full	21.97
n7	25	15	2535	DFT	16QAM	Inner_Full	22.00
n7	25	15	2535	DFT	16QAM	Edge_1RB_Left	21.15
n7	25	15	2535	DFT	16QAM	Edge_1RB_Right	21.15
n7	25	15	2535	DFT	16QAM	Outer_Full	20.91
n7	25	15	2535	DFT	64QAM	Inner_Full	20.44
n7	25	15	2535	DFT	64QAM	Edge_1RB_Left	20.20
n7	25	15	2535	DFT	64QAM	Edge_1RB_Right	20.23
n7	25	15	2535	DFT	64QAM	Outer_Full	20.38
n7	25	15	2535	DFT	256QAM	Inner_Full	17.92
n7	25	15	2535	DFT	256QAM	Edge_1RB_Left	17.63
n7	25	15	2535	DFT	256QAM	Edge_1RB_Right	17.62
n7	25	15	2535	DFT	256QAM	Outer_Full	17.95
n7	25	15	2535	CP	QPSK	Inner_Full	21.78
n7	25	15	2535	CP	QPSK	Edge_1RB_Left	19.94
n7	25	15	2535	CP	QPSK	Edge_1RB_Right	20.08
n7	25	15	2535	CP	QPSK	Outer_Full	19.61
n7	25	15	2535	CP	16QAM	Inner_Full	21.03
n7	25	15	2535	CP	16QAM	Edge_1RB_Left	20.34
n7	25	15	2535	CP	16QAM	Edge_1RB_Right	20.37
n7	25	15	2535	CP	16QAM	Outer_Full	19.48
n7	25	15	2535	CP	64QAM	Inner_Full	19.66
n7	25	15	2535	CP	64QAM	Edge_1RB_Left	19.22
n7	25	15	2535	CP	64QAM	Edge_1RB_Right	19.16
n7	25	15	2535	CP	64QAM	Outer_Full	18.46
n7	25	15	2535	CP	256QAM	Inner_Full	16.38
n7	25	15	2535	CP	256QAM	Edge_1RB_Left	16.21
n7	25	15	2535	CP	256QAM	Edge_1RB_Right	16.31
n7	25	15	2535	CP	256QAM	Outer_Full	16.46
n7	25	15	2557.5	DFT	QPSK	Inner_Full	23.07



BAND	BW(MHz)	SCS(kHz)	FREQ(MHz)	OFDM	MODULATION	RB LOCATION	POWER(dBm)
n7	25	15	2557.5	DFT	QPSK	Edge_1RB_Left	20.80
n7	25	15	2557.5	DFT	QPSK	Edge_1RB_Right	20.60
n7	25	15	2557.5	DFT	QPSK	Outer_Full	22.07
n7	25	15	2557.5	DFT	16QAM	Inner_Full	21.93
n7	25	15	2557.5	DFT	16QAM	Edge_1RB_Left	21.18
n7	25	15	2557.5	DFT	16QAM	Edge_1RB_Right	21.04
n7	25	15	2557.5	DFT	16QAM	Outer_Full	20.91
n7	25	15	2557.5	DFT	64QAM	Inner_Full	20.48
n7	25	15	2557.5	DFT	64QAM	Edge_1RB_Left	20.28
n7	25	15	2557.5	DFT	64QAM	Edge_1RB_Right	20.13
n7	25	15	2557.5	DFT	64QAM	Outer_Full	20.44
n7	25	15	2557.5	DFT	256QAM	Inner_Full	17.85
n7	25	15	2557.5	DFT	256QAM	Edge_1RB_Left	17.67
n7	25	15	2557.5	DFT	256QAM	Edge_1RB_Right	17.52
n7	25	15	2557.5	DFT	256QAM	Outer_Full	17.85
n7	25	15	2557.5	CP	QPSK	Inner_Full	21.69
n7	25	15	2557.5	CP	QPSK	Edge_1RB_Left	20.06
n7	25	15	2557.5	CP	QPSK	Edge_1RB_Right	19.85
n7	25	15	2557.5	CP	QPSK	Outer_Full	19.54
n7	25	15	2557.5	CP	16QAM	Inner_Full	21.00
n7	25	15	2557.5	CP	16QAM	Edge_1RB_Left	20.36
n7	25	15	2557.5	CP	16QAM	Edge_1RB_Right	20.13
n7	25	15	2557.5	CP	16QAM	Outer_Full	19.43
n7	25	15	2557.5	CP	64QAM	Inner_Full	19.54
n7	25	15	2557.5	CP	64QAM	Edge_1RB_Left	19.24
n7	25	15	2557.5	CP	64QAM	Edge_1RB_Right	19.08
n7	25	15	2557.5	CP	64QAM	Outer_Full	18.47
n7	25	15	2557.5	CP	256QAM	Inner_Full	16.40
n7	25	15	2557.5	CP	256QAM	Edge_1RB_Left	16.21
n7	25	15	2557.5	CP	256QAM	Edge_1RB_Right	16.00
n7	25	15	2557.5	CP	256QAM	Outer_Full	16.43
n7	30	15	2515	DFT	QPSK	Inner_Full	23.03
n7	30	15	2515	DFT	QPSK	Edge_1RB_Left	20.58
n7	30	15	2515	DFT	QPSK	Edge_1RB_Right	20.64
n7	30	15	2515	DFT	QPSK	Outer_Full	21.94
n7	30	15	2515	DFT	16QAM	Inner_Full	21.85
n7	30	15	2515	DFT	16QAM	Edge_1RB_Left	20.92
n7	30	15	2515	DFT	16QAM	Edge_1RB_Right	21.07
n7	30	15	2515	DFT	16QAM	Outer_Full	20.87
n7	30	15	2515	DFT	64QAM	Inner_Full	20.39
n7	30	15	2515	DFT	64QAM	Edge_1RB_Left	20.16



BAND	BW(MHz)	SCS(kHz)	FREQ(MHz)	OFDM	MODULATION	RB LOCATION	POWER(dBm)
n7	30	15	2515	DFT	64QAM	Edge_1RB_Right	20.20
n7	30	15	2515	DFT	64QAM	Outer_Full	20.34
n7	30	15	2515	DFT	256QAM	Inner_Full	17.79
n7	30	15	2515	DFT	256QAM	Edge_1RB_Left	17.52
n7	30	15	2515	DFT	256QAM	Edge_1RB_Right	17.51
n7	30	15	2515	DFT	256QAM	Outer_Full	17.85
n7	30	15	2515	CP	QPSK	Inner_Full	21.46
n7	30	15	2515	CP	QPSK	Edge_1RB_Left	19.81
n7	30	15	2515	CP	QPSK	Edge_1RB_Right	19.93
n7	30	15	2515	CP	QPSK	Outer_Full	19.37
n7	30	15	2515	CP	16QAM	Inner_Full	20.98
n7	30	15	2515	CP	16QAM	Edge_1RB_Left	20.07
n7	30	15	2515	CP	16QAM	Edge_1RB_Right	20.31
n7	30	15	2515	CP	16QAM	Outer_Full	19.37
n7	30	15	2515	CP	64QAM	Inner_Full	19.46
n7	30	15	2515	CP	64QAM	Edge_1RB_Left	18.92
n7	30	15	2515	CP	64QAM	Edge_1RB_Right	19.25
n7	30	15	2515	CP	64QAM	Outer_Full	18.35
n7	30	15	2515	CP	256QAM	Inner_Full	16.31
n7	30	15	2515	CP	256QAM	Edge_1RB_Left	16.15
n7	30	15	2515	CP	256QAM	Edge_1RB_Right	16.11
n7	30	15	2515	CP	256QAM	Outer_Full	16.42
n7	30	15	2535	DFT	QPSK	Inner_Full	23.16
n7	30	15	2535	DFT	QPSK	Edge_1RB_Left	20.75
n7	30	15	2535	DFT	QPSK	Edge_1RB_Right	20.66
n7	30	15	2535	DFT	QPSK	Outer_Full	22.06
n7	30	15	2535	DFT	16QAM	Inner_Full	21.87
n7	30	15	2535	DFT	16QAM	Edge_1RB_Left	21.04
n7	30	15	2535	DFT	16QAM	Edge_1RB_Right	21.16
n7	30	15	2535	DFT	16QAM	Outer_Full	20.93
n7	30	15	2535	DFT	64QAM	Inner_Full	20.44
n7	30	15	2535	DFT	64QAM	Edge_1RB_Left	20.14
n7	30	15	2535	DFT	64QAM	Edge_1RB_Right	20.16
n7	30	15	2535	DFT	64QAM	Outer_Full	20.40
n7	30	15	2535	DFT	256QAM	Inner_Full	17.85
n7	30	15	2535	DFT	256QAM	Edge_1RB_Left	17.66
n7	30	15	2535	DFT	256QAM	Edge_1RB_Right	17.53
n7	30	15	2535	DFT	256QAM	Outer_Full	17.95
n7	30	15	2535	CP	QPSK	Inner_Full	21.56
n7	30	15	2535	CP	QPSK	Edge_1RB_Left	19.91
n7	30	15	2535	CP	QPSK	Edge_1RB_Right	20.01



BAND	BW(MHz)	SCS(kHz)	FREQ(MHz)	OFDM	MODULATION	RB LOCATION	POWER(dBm)
n7	30	15	2535	CP	QPSK	Outer_Full	19.42
n7	30	15	2535	CP	16QAM	Inner_Full	21.08
n7	30	15	2535	CP	16QAM	Edge_1RB_Left	20.19
n7	30	15	2535	CP	16QAM	Edge_1RB_Right	20.35
n7	30	15	2535	CP	16QAM	Outer_Full	19.44
n7	30	15	2535	CP	64QAM	Inner_Full	19.50
n7	30	15	2535	CP	64QAM	Edge_1RB_Left	19.08
n7	30	15	2535	CP	64QAM	Edge_1RB_Right	19.21
n7	30	15	2535	CP	64QAM	Outer_Full	18.46
n7	30	15	2535	CP	256QAM	Inner_Full	16.41
n7	30	15	2535	CP	256QAM	Edge_1RB_Left	16.19
n7	30	15	2535	CP	256QAM	Edge_1RB_Right	16.27
n7	30	15	2535	CP	256QAM	Outer_Full	16.44
n7	30	15	2555	DFT	QPSK	Inner_Full	23.12
n7	30	15	2555	DFT	QPSK	Edge_1RB_Left	20.74
n7	30	15	2555	DFT	QPSK	Edge_1RB_Right	20.47
n7	30	15	2555	DFT	QPSK	Outer_Full	22.00
n7	30	15	2555	DFT	16QAM	Inner_Full	21.94
n7	30	15	2555	DFT	16QAM	Edge_1RB_Left	21.21
n7	30	15	2555	DFT	16QAM	Edge_1RB_Right	21.03
n7	30	15	2555	DFT	16QAM	Outer_Full	20.92
n7	30	15	2555	DFT	64QAM	Inner_Full	20.44
n7	30	15	2555	DFT	64QAM	Edge_1RB_Left	20.23
n7	30	15	2555	DFT	64QAM	Edge_1RB_Right	20.05
n7	30	15	2555	DFT	64QAM	Outer_Full	20.48
n7	30	15	2555	DFT	256QAM	Inner_Full	17.78
n7	30	15	2555	DFT	256QAM	Edge_1RB_Left	17.77
n7	30	15	2555	DFT	256QAM	Edge_1RB_Right	17.41
n7	30	15	2555	DFT	256QAM	Outer_Full	17.92
n7	30	15	2555	CP	QPSK	Inner_Full	21.59
n7	30	15	2555	CP	QPSK	Edge_1RB_Left	20.02
n7	30	15	2555	CP	QPSK	Edge_1RB_Right	19.82
n7	30	15	2555	CP	QPSK	Outer_Full	19.43
n7	30	15	2555	CP	16QAM	Inner_Full	21.06
n7	30	15	2555	CP	16QAM	Edge_1RB_Left	20.34
n7	30	15	2555	CP	16QAM	Edge_1RB_Right	20.22
n7	30	15	2555	CP	16QAM	Outer_Full	19.43
n7	30	15	2555	CP	64QAM	Inner_Full	19.54
n7	30	15	2555	CP	64QAM	Edge_1RB_Left	19.25
n7	30	15	2555	CP	64QAM	Edge_1RB_Right	19.12
n7	30	15	2555	CP	64QAM	Outer_Full	18.46



BAND	BW(MHz)	SCS(kHz)	FREQ(MHz)	OFDM	MODULATION	RB LOCATION	POWER(dBm)
n7	30	15	2555	CP	256QAM	Inner_Full	16.41
n7	30	15	2555	CP	256QAM	Edge_1RB_Left	16.18
n7	30	15	2555	CP	256QAM	Edge_1RB_Right	16.01
n7	30	15	2555	CP	256QAM	Outer_Full	16.47
n7	35	15	2517.5	DFT	QPSK	Inner_Full	22.94
n7	35	15	2517.5	DFT	QPSK	Edge_1RB_Left	20.64
n7	35	15	2517.5	DFT	QPSK	Edge_1RB_Right	20.67
n7	35	15	2517.5	DFT	QPSK	Outer_Full	21.95
n7	35	15	2517.5	DFT	16QAM	Inner_Full	21.98
n7	35	15	2517.5	DFT	16QAM	Edge_1RB_Left	21.02
n7	35	15	2517.5	DFT	16QAM	Edge_1RB_Right	20.99
n7	35	15	2517.5	DFT	16QAM	Outer_Full	20.89
n7	35	15	2517.5	DFT	64QAM	Inner_Full	20.28
n7	35	15	2517.5	DFT	64QAM	Edge_1RB_Left	19.96
n7	35	15	2517.5	DFT	64QAM	Edge_1RB_Right	20.01
n7	35	15	2517.5	DFT	64QAM	Outer_Full	20.37
n7	35	15	2517.5	DFT	256QAM	Inner_Full	17.84
n7	35	15	2517.5	DFT	256QAM	Edge_1RB_Left	17.49
n7	35	15	2517.5	DFT	256QAM	Edge_1RB_Right	17.34
n7	35	15	2517.5	DFT	256QAM	Outer_Full	17.94
n7	35	15	2517.5	CP	QPSK	Inner_Full	21.70
n7	35	15	2517.5	CP	QPSK	Edge_1RB_Left	19.97
n7	35	15	2517.5	CP	QPSK	Edge_1RB_Right	19.76
n7	35	15	2517.5	CP	QPSK	Outer_Full	19.31
n7	35	15	2517.5	CP	16QAM	Inner_Full	21.07
n7	35	15	2517.5	CP	16QAM	Edge_1RB_Left	20.29
n7	35	15	2517.5	CP	16QAM	Edge_1RB_Right	20.30
n7	35	15	2517.5	CP	16QAM	Outer_Full	19.35
n7	35	15	2517.5	CP	64QAM	Inner_Full	19.17
n7	35	15	2517.5	CP	64QAM	Edge_1RB_Left	18.82
n7	35	15	2517.5	CP	64QAM	Edge_1RB_Right	19.12
n7	35	15	2517.5	CP	64QAM	Outer_Full	18.35
n7	35	15	2517.5	CP	256QAM	Inner_Full	16.33
n7	35	15	2517.5	CP	256QAM	Edge_1RB_Left	16.04
n7	35	15	2517.5	CP	256QAM	Edge_1RB_Right	16.09
n7	35	15	2517.5	CP	256QAM	Outer_Full	16.26
n7	35	15	2535	DFT	QPSK	Inner_Full	23.12
n7	35	15	2535	DFT	QPSK	Edge_1RB_Left	20.70
n7	35	15	2535	DFT	QPSK	Edge_1RB_Right	20.60
n7	35	15	2535	DFT	QPSK	Outer_Full	21.88
n7	35	15	2535	DFT	16QAM	Inner_Full	22.00



BAND	BW(MHz)	SCS(kHz)	FREQ(MHz)	OFDM	MODULATION	RB LOCATION	POWER(dBm)
n7	35	15	2535	DFT	16QAM	Edge_1RB_Left	21.14
n7	35	15	2535	DFT	16QAM	Edge_1RB_Right	21.07
n7	35	15	2535	DFT	16QAM	Outer_Full	20.94
n7	35	15	2535	DFT	64QAM	Inner_Full	20.42
n7	35	15	2535	DFT	64QAM	Edge_1RB_Left	20.17
n7	35	15	2535	DFT	64QAM	Edge_1RB_Right	20.08
n7	35	15	2535	DFT	64QAM	Outer_Full	20.53
n7	35	15	2535	DFT	256QAM	Inner_Full	17.88
n7	35	15	2535	DFT	256QAM	Edge_1RB_Left	17.50
n7	35	15	2535	DFT	256QAM	Edge_1RB_Right	17.47
n7	35	15	2535	DFT	256QAM	Outer_Full	17.85
n7	35	15	2535	CP	QPSK	Inner_Full	21.51
n7	35	15	2535	CP	QPSK	Edge_1RB_Left	19.78
n7	35	15	2535	CP	QPSK	Edge_1RB_Right	19.95
n7	35	15	2535	CP	QPSK	Outer_Full	19.36
n7	35	15	2535	CP	16QAM	Inner_Full	21.01
n7	35	15	2535	CP	16QAM	Edge_1RB_Left	20.27
n7	35	15	2535	CP	16QAM	Edge_1RB_Right	20.17
n7	35	15	2535	CP	16QAM	Outer_Full	19.36
n7	35	15	2535	CP	64QAM	Inner_Full	19.37
n7	35	15	2535	CP	64QAM	Edge_1RB_Left	19.03
n7	35	15	2535	CP	64QAM	Edge_1RB_Right	19.03
n7	35	15	2535	CP	64QAM	Outer_Full	18.43
n7	35	15	2535	CP	256QAM	Inner_Full	16.56
n7	35	15	2535	CP	256QAM	Edge_1RB_Left	16.11
n7	35	15	2535	CP	256QAM	Edge_1RB_Right	16.11
n7	35	15	2535	CP	256QAM	Outer_Full	16.28
n7	35	15	2552.5	DFT	QPSK	Inner_Full	23.00
n7	35	15	2552.5	DFT	QPSK	Edge_1RB_Left	20.61
n7	35	15	2552.5	DFT	QPSK	Edge_1RB_Right	20.47
n7	35	15	2552.5	DFT	QPSK	Outer_Full	21.92
n7	35	15	2552.5	DFT	16QAM	Inner_Full	21.86
n7	35	15	2552.5	DFT	16QAM	Edge_1RB_Left	20.91
n7	35	15	2552.5	DFT	16QAM	Edge_1RB_Right	20.97
n7	35	15	2552.5	DFT	16QAM	Outer_Full	20.80
n7	35	15	2552.5	DFT	64QAM	Inner_Full	20.53
n7	35	15	2552.5	DFT	64QAM	Edge_1RB_Left	20.14
n7	35	15	2552.5	DFT	64QAM	Edge_1RB_Right	19.97
n7	35	15	2552.5	DFT	64QAM	Outer_Full	20.40
n7	35	15	2552.5	DFT	256QAM	Inner_Full	17.69
n7	35	15	2552.5	DFT	256QAM	Edge_1RB_Left	17.29



BAND	BW(MHz)	SCS(kHz)	FREQ(MHz)	OFDM	MODULATION	RB LOCATION	POWER(dBm)
n7	35	15	2552.5	DFT	256QAM	Edge_1RB_Right	17.46
n7	35	15	2552.5	DFT	256QAM	Outer_Full	17.84
n7	35	15	2552.5	CP	QPSK	Inner_Full	21.44
n7	35	15	2552.5	CP	QPSK	Edge_1RB_Left	19.88
n7	35	15	2552.5	CP	QPSK	Edge_1RB_Right	19.65
n7	35	15	2552.5	CP	QPSK	Outer_Full	19.43
n7	35	15	2552.5	CP	16QAM	Inner_Full	20.95
n7	35	15	2552.5	CP	16QAM	Edge_1RB_Left	20.32
n7	35	15	2552.5	CP	16QAM	Edge_1RB_Right	20.33
n7	35	15	2552.5	CP	16QAM	Outer_Full	19.50
n7	35	15	2552.5	CP	64QAM	Inner_Full	19.21
n7	35	15	2552.5	CP	64QAM	Edge_1RB_Left	19.08
n7	35	15	2552.5	CP	64QAM	Edge_1RB_Right	19.06
n7	35	15	2552.5	CP	64QAM	Outer_Full	18.37
n7	35	15	2552.5	CP	256QAM	Inner_Full	16.25
n7	35	15	2552.5	CP	256QAM	Edge_1RB_Left	15.95
n7	35	15	2552.5	CP	256QAM	Edge_1RB_Right	16.06
n7	35	15	2552.5	CP	256QAM	Outer_Full	16.29
n7	40	15	2520	DFT	QPSK	Inner_Full	23.05
n7	40	15	2520	DFT	QPSK	Edge_1RB_Left	20.53
n7	40	15	2520	DFT	QPSK	Edge_1RB_Right	20.77
n7	40	15	2520	DFT	QPSK	Outer_Full	22.03
n7	40	15	2520	DFT	16QAM	Inner_Full	21.88
n7	40	15	2520	DFT	16QAM	Edge_1RB_Left	20.92
n7	40	15	2520	DFT	16QAM	Edge_1RB_Right	21.07
n7	40	15	2520	DFT	16QAM	Outer_Full	20.89
n7	40	15	2520	DFT	64QAM	Inner_Full	20.37
n7	40	15	2520	DFT	64QAM	Edge_1RB_Left	19.96
n7	40	15	2520	DFT	64QAM	Edge_1RB_Right	20.20
n7	40	15	2520	DFT	64QAM	Outer_Full	20.35
n7	40	15	2520	DFT	256QAM	Inner_Full	17.87
n7	40	15	2520	DFT	256QAM	Edge_1RB_Left	17.54
n7	40	15	2520	DFT	256QAM	Edge_1RB_Right	17.60
n7	40	15	2520	DFT	256QAM	Outer_Full	17.95
n7	40	15	2520	CP	QPSK	Inner_Full	21.50
n7	40	15	2520	CP	QPSK	Edge_1RB_Left	19.81
n7	40	15	2520	CP	QPSK	Edge_1RB_Right	19.96
n7	40	15	2520	CP	QPSK	Outer_Full	19.48
n7	40	15	2520	CP	16QAM	Inner_Full	21.02
n7	40	15	2520	CP	16QAM	Edge_1RB_Left	20.09
n7	40	15	2520	CP	16QAM	Edge_1RB_Right	20.32



BAND	BW(MHz)	SCS(kHz)	FREQ(MHz)	OFDM	MODULATION	RB LOCATION	POWER(dBm)
n7	40	15	2520	CP	16QAM	Outer_Full	19.39
n7	40	15	2520	CP	64QAM	Inner_Full	19.43
n7	40	15	2520	CP	64QAM	Edge_1RB_Left	18.92
n7	40	15	2520	CP	64QAM	Edge_1RB_Right	19.16
n7	40	15	2520	CP	64QAM	Outer_Full	18.37
n7	40	15	2520	CP	256QAM	Inner_Full	16.34
n7	40	15	2520	CP	256QAM	Edge_1RB_Left	15.99
n7	40	15	2520	CP	256QAM	Edge_1RB_Right	16.16
n7	40	15	2520	CP	256QAM	Outer_Full	16.31
n7	40	15	2535	DFT	QPSK	Inner_Full	23.15
n7	40	15	2535	DFT	QPSK	Edge_1RB_Left	20.63
n7	40	15	2535	DFT	QPSK	Edge_1RB_Right	20.77
n7	40	15	2535	DFT	QPSK	Outer_Full	22.12
n7	40	15	2535	DFT	16QAM	Inner_Full	22.01
n7	40	15	2535	DFT	16QAM	Edge_1RB_Left	21.13
n7	40	15	2535	DFT	16QAM	Edge_1RB_Right	21.19
n7	40	15	2535	DFT	16QAM	Outer_Full	20.92
n7	40	15	2535	DFT	64QAM	Inner_Full	20.47
n7	40	15	2535	DFT	64QAM	Edge_1RB_Left	20.17
n7	40	15	2535	DFT	64QAM	Edge_1RB_Right	20.14
n7	40	15	2535	DFT	64QAM	Outer_Full	20.38
n7	40	15	2535	DFT	256QAM	Inner_Full	17.92
n7	40	15	2535	DFT	256QAM	Edge_1RB_Left	17.51
n7	40	15	2535	DFT	256QAM	Edge_1RB_Right	17.54
n7	40	15	2535	DFT	256QAM	Outer_Full	17.90
n7	40	15	2535	CP	QPSK	Inner_Full	21.55
n7	40	15	2535	CP	QPSK	Edge_1RB_Left	19.85
n7	40	15	2535	CP	QPSK	Edge_1RB_Right	19.94
n7	40	15	2535	CP	QPSK	Outer_Full	19.51
n7	40	15	2535	CP	16QAM	Inner_Full	21.06
n7	40	15	2535	CP	16QAM	Edge_1RB_Left	20.16
n7	40	15	2535	CP	16QAM	Edge_1RB_Right	20.35
n7	40	15	2535	CP	16QAM	Outer_Full	19.45
n7	40	15	2535	CP	64QAM	Inner_Full	19.52
n7	40	15	2535	CP	64QAM	Edge_1RB_Left	19.04
n7	40	15	2535	CP	64QAM	Edge_1RB_Right	19.14
n7	40	15	2535	CP	64QAM	Outer_Full	16.75
n7	40	15	2535	CP	256QAM	Inner_Full	16.35
n7	40	15	2535	CP	256QAM	Edge_1RB_Left	16.16
n7	40	15	2535	CP	256QAM	Edge_1RB_Right	16.16
n7	40	15	2535	CP	256QAM	Outer_Full	16.36



BAND	BW(MHz)	SCS(kHz)	FREQ(MHz)	OFDM	MODULATION	RB LOCATION	POWER(dBm)
n7	40	15	2550	DFT	QPSK	Inner_Full	23.12
n7	40	15	2550	DFT	QPSK	Edge_1RB_Left	20.79
n7	40	15	2550	DFT	QPSK	Edge_1RB_Right	20.52
n7	40	15	2550	DFT	QPSK	Outer_Full	22.19
n7	40	15	2550	DFT	16QAM	Inner_Full	22.01
n7	40	15	2550	DFT	16QAM	Edge_1RB_Left	21.16
n7	40	15	2550	DFT	16QAM	Edge_1RB_Right	20.99
n7	40	15	2550	DFT	16QAM	Outer_Full	20.93
n7	40	15	2550	DFT	64QAM	Inner_Full	20.46
n7	40	15	2550	DFT	64QAM	Edge_1RB_Left	20.27
n7	40	15	2550	DFT	64QAM	Edge_1RB_Right	20.08
n7	40	15	2550	DFT	64QAM	Outer_Full	20.42
n7	40	15	2550	DFT	256QAM	Inner_Full	17.93
n7	40	15	2550	DFT	256QAM	Edge_1RB_Left	17.70
n7	40	15	2550	DFT	256QAM	Edge_1RB_Right	17.37
n7	40	15	2550	DFT	256QAM	Outer_Full	17.90
n7	40	15	2550	CP	QPSK	Inner_Full	21.66
n7	40	15	2550	CP	QPSK	Edge_1RB_Left	20.05
n7	40	15	2550	CP	QPSK	Edge_1RB_Right	19.87
n7	40	15	2550	CP	QPSK	Outer_Full	19.53
n7	40	15	2550	CP	16QAM	Inner_Full	21.14
n7	40	15	2550	CP	16QAM	Edge_1RB_Left	20.49
n7	40	15	2550	CP	16QAM	Edge_1RB_Right	20.20
n7	40	15	2550	CP	16QAM	Outer_Full	19.49
n7	40	15	2550	CP	64QAM	Inner_Full	19.57
n7	40	15	2550	CP	64QAM	Edge_1RB_Left	19.30
n7	40	15	2550	CP	64QAM	Edge_1RB_Right	19.05
n7	40	15	2550	CP	64QAM	Outer_Full	18.50
n7	40	15	2550	CP	256QAM	Inner_Full	16.47
n7	40	15	2550	CP	256QAM	Edge_1RB_Left	16.18
n7	40	15	2550	CP	256QAM	Edge_1RB_Right	16.00
n7	40	15	2550	CP	256QAM	Outer_Full	16.38
n7	50	15	2525	DFT	QPSK	Inner_Full	23.24
n7	50	15	2525	DFT	QPSK	Edge_1RB_Left	20.73
n7	50	15	2525	DFT	QPSK	Edge_1RB_Right	20.82
n7	50	15	2525	DFT	QPSK	Outer_Full	22.10
n7	50	15	2525	DFT	16QAM	Inner_Full	22.03
n7	50	15	2525	DFT	16QAM	Edge_1RB_Left	21.14
n7	50	15	2525	DFT	16QAM	Edge_1RB_Right	21.34
n7	50	15	2525	DFT	16QAM	Outer_Full	21.02
n7	50	15	2525	DFT	64QAM	Inner_Full	20.48



BAND	BW(MHz)	SCS(kHz)	FREQ(MHz)	OFDM	MODULATION	RB LOCATION	POWER(dBm)
n7	50	15	2525	DFT	64QAM	Edge_1RB_Left	20.33
n7	50	15	2525	DFT	64QAM	Edge_1RB_Right	20.25
n7	50	15	2525	DFT	64QAM	Outer_Full	20.52
n7	50	15	2525	DFT	256QAM	Inner_Full	17.98
n7	50	15	2525	DFT	256QAM	Edge_1RB_Left	17.66
n7	50	15	2525	DFT	256QAM	Edge_1RB_Right	17.74
n7	50	15	2525	DFT	256QAM	Outer_Full	18.00
n7	50	15	2525	CP	QPSK	Inner_Full	21.69
n7	50	15	2525	CP	QPSK	Edge_1RB_Left	20.02
n7	50	15	2525	CP	QPSK	Edge_1RB_Right	20.07
n7	50	15	2525	CP	QPSK	Outer_Full	19.52
n7	50	15	2525	CP	16QAM	Inner_Full	21.18
n7	50	15	2525	CP	16QAM	Edge_1RB_Left	20.27
n7	50	15	2525	CP	16QAM	Edge_1RB_Right	20.42
n7	50	15	2525	CP	16QAM	Outer_Full	19.58
n7	50	15	2525	CP	64QAM	Inner_Full	19.56
n7	50	15	2525	CP	64QAM	Edge_1RB_Left	19.08
n7	50	15	2525	CP	64QAM	Edge_1RB_Right	19.30
n7	50	15	2525	CP	64QAM	Outer_Full	18.53
n7	50	15	2525	CP	256QAM	Inner_Full	16.47
n7	50	15	2525	CP	256QAM	Edge_1RB_Left	16.16
n7	50	15	2525	CP	256QAM	Edge_1RB_Right	16.30
n7	50	15	2525	CP	256QAM	Outer_Full	16.56
n7	50	15	2535	DFT	QPSK	Inner_Full	23.28
n7	50	15	2535	DFT	QPSK	Edge_1RB_Left	20.62
n7	50	15	2535	DFT	QPSK	Edge_1RB_Right	20.84
n7	50	15	2535	DFT	QPSK	Outer_Full	22.23
n7	50	15	2535	DFT	16QAM	Inner_Full	22.10
n7	50	15	2535	DFT	16QAM	Edge_1RB_Left	21.17
n7	50	15	2535	DFT	16QAM	Edge_1RB_Right	21.21
n7	50	15	2535	DFT	16QAM	Outer_Full	21.03
n7	50	15	2535	DFT	64QAM	Inner_Full	20.62
n7	50	15	2535	DFT	64QAM	Edge_1RB_Left	20.29
n7	50	15	2535	DFT	64QAM	Edge_1RB_Right	20.36
n7	50	15	2535	DFT	64QAM	Outer_Full	20.57
n7	50	15	2535	DFT	256QAM	Inner_Full	18.07
n7	50	15	2535	DFT	256QAM	Edge_1RB_Left	17.64
n7	50	15	2535	DFT	256QAM	Edge_1RB_Right	17.58
n7	50	15	2535	DFT	256QAM	Outer_Full	18.12
n7	50	15	2535	CP	QPSK	Inner_Full	21.77
n7	50	15	2535	CP	QPSK	Edge_1RB_Left	19.94



BAND	BW(MHz)	SCS(kHz)	FREQ(MHz)	OFDM	MODULATION	RB LOCATION	POWER(dBm)
n7	50	15	2535	CP	QPSK	Edge_1RB_Right	20.08
n7	50	15	2535	CP	QPSK	Outer_Full	19.58
n7	50	15	2535	CP	16QAM	Inner_Full	21.16
n7	50	15	2535	CP	16QAM	Edge_1RB_Left	20.36
n7	50	15	2535	CP	16QAM	Edge_1RB_Right	20.36
n7	50	15	2535	CP	16QAM	Outer_Full	19.54
n7	50	15	2535	CP	64QAM	Inner_Full	19.64
n7	50	15	2535	CP	64QAM	Edge_1RB_Left	19.10
n7	50	15	2535	CP	64QAM	Edge_1RB_Right	19.16
n7	50	15	2535	CP	64QAM	Outer_Full	18.52
n7	50	15	2535	CP	256QAM	Inner_Full	16.56
n7	50	15	2535	CP	256QAM	Edge_1RB_Left	16.26
n7	50	15	2535	CP	256QAM	Edge_1RB_Right	16.27
n7	50	15	2535	CP	256QAM	Outer_Full	16.63
n7	50	15	2545	DFT	QPSK	Inner_Full	23.30
n7	50	15	2545	DFT	QPSK	Edge_1RB_Left	20.85
n7	50	15	2545	DFT	QPSK	Edge_1RB_Right	20.77
n7	50	15	2545	DFT	QPSK	Outer_Full	22.24
n7	50	15	2545	DFT	16QAM	Inner_Full	22.09
n7	50	15	2545	DFT	16QAM	Edge_1RB_Left	21.28
n7	50	15	2545	DFT	16QAM	Edge_1RB_Right	21.22
n7	50	15	2545	DFT	16QAM	Outer_Full	21.02
n7	50	15	2545	DFT	64QAM	Inner_Full	20.61
n7	50	15	2545	DFT	64QAM	Edge_1RB_Left	20.27
n7	50	15	2545	DFT	64QAM	Edge_1RB_Right	20.21
n7	50	15	2545	DFT	64QAM	Outer_Full	20.56
n7	50	15	2545	DFT	256QAM	Inner_Full	18.09
n7	50	15	2545	DFT	256QAM	Edge_1RB_Left	17.87
n7	50	15	2545	DFT	256QAM	Edge_1RB_Right	17.59
n7	50	15	2545	DFT	256QAM	Outer_Full	18.09
n7	50	15	2545	CP	QPSK	Inner_Full	21.79
n7	50	15	2545	CP	QPSK	Edge_1RB_Left	20.02
n7	50	15	2545	CP	QPSK	Edge_1RB_Right	19.91
n7	50	15	2545	CP	QPSK	Outer_Full	19.61
n7	50	15	2545	CP	16QAM	Inner_Full	21.27
n7	50	15	2545	CP	16QAM	Edge_1RB_Left	20.40
n7	50	15	2545	CP	16QAM	Edge_1RB_Right	20.36
n7	50	15	2545	CP	16QAM	Outer_Full	19.64
n7	50	15	2545	CP	64QAM	Inner_Full	19.68
n7	50	15	2545	CP	64QAM	Edge_1RB_Left	19.30
n7	50	15	2545	CP	64QAM	Edge_1RB_Right	19.20



No.24T04N001537-009-RF NR

BAND	BW(MHz)	SCS(kHz)	FREQ(MHz)	OFDM	MODULATION	RB LOCATION	POWER(dBm)
n7	50	15	2545	CP	64QAM	Outer_Full	18.70
n7	50	15	2545	CP	256QAM	Inner_Full	16.62
n7	50	15	2545	CP	256QAM	Edge_1RB_Left	16.26
n7	50	15	2545	CP	256QAM	Edge_1RB_Right	16.19
n7	50	15	2545	CP	256QAM	Outer_Full	16.67



n38

BAND	BW(MHz)	SCS(kHz)	FREQ(MHz)	OFDM	MODULATION	RB LOCATION	POWER(dBm)
n38	10	30	2575	DFT	QPSK	Inner_Full	24.29
n38	10	30	2575	DFT	QPSK	Edge_1RB_Left	20.69
n38	10	30	2575	DFT	QPSK	Edge_1RB_Right	20.58
n38	10	30	2575	DFT	QPSK	Outer_Full	23.31
n38	10	30	2575	DFT	16QAM	Inner_Full	24.24
n38	10	30	2575	DFT	16QAM	Edge_1RB_Left	21.91
n38	10	30	2575	DFT	16QAM	Edge_1RB_Right	21.77
n38	10	30	2575	DFT	16QAM	Outer_Full	22.17
n38	10	30	2575	DFT	64QAM	Inner_Full	23.25
n38	10	30	2575	DFT	64QAM	Edge_1RB_Left	21.21
n38	10	30	2575	DFT	64QAM	Edge_1RB_Right	21.11
n38	10	30	2575	DFT	64QAM	Outer_Full	21.74
n38	10	30	2575	DFT	256QAM	Inner_Full	21.66
n38	10	30	2575	DFT	256QAM	Edge_1RB_Left	19.40
n38	10	30	2575	DFT	256QAM	Edge_1RB_Right	19.29
n38	10	30	2575	DFT	256QAM	Outer_Full	21.58
n38	10	30	2575	CP	QPSK	Inner_Full	24.08
n38	10	30	2575	CP	QPSK	Edge_1RB_Left	21.16
n38	10	30	2575	CP	QPSK	Edge_1RB_Right	21.08
n38	10	30	2575	CP	QPSK	Outer_Full	21.26
n38	10	30	2575	CP	16QAM	Inner_Full	23.79
n38	10	30	2575	CP	16QAM	Edge_1RB_Left	21.11
n38	10	30	2575	CP	16QAM	Edge_1RB_Right	21.11
n38	10	30	2575	CP	16QAM	Outer_Full	21.26
n38	10	30	2575	CP	64QAM	Inner_Full	23.28
n38	10	30	2575	CP	64QAM	Edge_1RB_Left	20.29
n38	10	30	2575	CP	64QAM	Edge_1RB_Right	20.26
n38	10	30	2575	CP	64QAM	Outer_Full	20.73
n38	10	30	2575	CP	256QAM	Inner_Full	20.70
n38	10	30	2575	CP	256QAM	Edge_1RB_Left	17.39
n38	10	30	2575	CP	256QAM	Edge_1RB_Right	17.29
n38	10	30	2575	CP	256QAM	Outer_Full	20.41
n38	10	30	2595	DFT	QPSK	Inner_Full	24.32
n38	10	30	2595	DFT	QPSK	Edge_1RB_Left	20.65
n38	10	30	2595	DFT	QPSK	Edge_1RB_Right	20.61
n38	10	30	2595	DFT	QPSK	Outer_Full	23.25
n38	10	30	2595	DFT	16QAM	Inner_Full	24.08
n38	10	30	2595	DFT	16QAM	Edge_1RB_Left	21.85
n38	10	30	2595	DFT	16QAM	Edge_1RB_Right	21.92



BAND	BW(MHz)	SCS(kHz)	FREQ(MHz)	OFDM	MODULATION	RB LOCATION	POWER(dBm)
n38	10	30	2595	DFT	16QAM	Outer_Full	22.19
n38	10	30	2595	DFT	64QAM	Inner_Full	22.67
n38	10	30	2595	DFT	64QAM	Edge_1RB_Left	21.16
n38	10	30	2595	DFT	64QAM	Edge_1RB_Right	21.15
n38	10	30	2595	DFT	64QAM	Outer_Full	21.70
n38	10	30	2595	DFT	256QAM	Inner_Full	21.19
n38	10	30	2595	DFT	256QAM	Edge_1RB_Left	19.39
n38	10	30	2595	DFT	256QAM	Edge_1RB_Right	19.37
n38	10	30	2595	DFT	256QAM	Outer_Full	21.04
n38	10	30	2595	CP	QPSK	Inner_Full	23.66
n38	10	30	2595	CP	QPSK	Edge_1RB_Left	21.14
n38	10	30	2595	CP	QPSK	Edge_1RB_Right	21.30
n38	10	30	2595	CP	QPSK	Outer_Full	21.31
n38	10	30	2595	CP	16QAM	Inner_Full	23.23
n38	10	30	2595	CP	16QAM	Edge_1RB_Left	20.97
n38	10	30	2595	CP	16QAM	Edge_1RB_Right	20.98
n38	10	30	2595	CP	16QAM	Outer_Full	21.26
n38	10	30	2595	CP	64QAM	Inner_Full	22.76
n38	10	30	2595	CP	64QAM	Edge_1RB_Left	20.23
n38	10	30	2595	CP	64QAM	Edge_1RB_Right	20.31
n38	10	30	2595	CP	64QAM	Outer_Full	20.76
n38	10	30	2595	CP	256QAM	Inner_Full	20.11
n38	10	30	2595	CP	256QAM	Edge_1RB_Left	17.33
n38	10	30	2595	CP	256QAM	Edge_1RB_Right	17.45
n38	10	30	2595	CP	256QAM	Outer_Full	20.08
n38	10	30	2615	DFT	QPSK	Inner_Full	24.41
n38	10	30	2615	DFT	QPSK	Edge_1RB_Left	20.67
n38	10	30	2615	DFT	QPSK	Edge_1RB_Right	20.66
n38	10	30	2615	DFT	QPSK	Outer_Full	23.36
n38	10	30	2615	DFT	16QAM	Inner_Full	24.33
n38	10	30	2615	DFT	16QAM	Edge_1RB_Left	21.92
n38	10	30	2615	DFT	16QAM	Edge_1RB_Right	21.99
n38	10	30	2615	DFT	16QAM	Outer_Full	22.25
n38	10	30	2615	DFT	64QAM	Inner_Full	23.11
n38	10	30	2615	DFT	64QAM	Edge_1RB_Left	21.21
n38	10	30	2615	DFT	64QAM	Edge_1RB_Right	21.27
n38	10	30	2615	DFT	64QAM	Outer_Full	21.79
n38	10	30	2615	DFT	256QAM	Inner_Full	21.59
n38	10	30	2615	DFT	256QAM	Edge_1RB_Left	19.42
n38	10	30	2615	DFT	256QAM	Edge_1RB_Right	19.46
n38	10	30	2615	DFT	256QAM	Outer_Full	21.44



BAND	BW(MHz)	SCS(kHz)	FREQ(MHz)	OFDM	MODULATION	RB LOCATION	POWER(dBm)
n38	10	30	2615	CP	QPSK	Inner_Full	24.02
n38	10	30	2615	CP	QPSK	Edge_1RB_Left	21.20
n38	10	30	2615	CP	QPSK	Edge_1RB_Right	21.27
n38	10	30	2615	CP	QPSK	Outer_Full	21.32
n38	10	30	2615	CP	16QAM	Inner_Full	23.61
n38	10	30	2615	CP	16QAM	Edge_1RB_Left	21.12
n38	10	30	2615	CP	16QAM	Edge_1RB_Right	21.10
n38	10	30	2615	CP	16QAM	Outer_Full	21.32
n38	10	30	2615	CP	64QAM	Inner_Full	23.11
n38	10	30	2615	CP	64QAM	Edge_1RB_Left	20.32
n38	10	30	2615	CP	64QAM	Edge_1RB_Right	20.35
n38	10	30	2615	CP	64QAM	Outer_Full	20.80
n38	10	30	2615	CP	256QAM	Inner_Full	20.56
n38	10	30	2615	CP	256QAM	Edge_1RB_Left	17.44
n38	10	30	2615	CP	256QAM	Edge_1RB_Right	17.41
n38	10	30	2615	CP	256QAM	Outer_Full	20.39
n38	15	30	2577.5	DFT	QPSK	Inner_Full	24.38
n38	15	30	2577.5	DFT	QPSK	Edge_1RB_Left	20.65
n38	15	30	2577.5	DFT	QPSK	Edge_1RB_Right	20.57
n38	15	30	2577.5	DFT	QPSK	Outer_Full	23.27
n38	15	30	2577.5	DFT	16QAM	Inner_Full	24.16
n38	15	30	2577.5	DFT	16QAM	Edge_1RB_Left	21.82
n38	15	30	2577.5	DFT	16QAM	Edge_1RB_Right	21.86
n38	15	30	2577.5	DFT	16QAM	Outer_Full	22.13
n38	15	30	2577.5	DFT	64QAM	Inner_Full	23.09
n38	15	30	2577.5	DFT	64QAM	Edge_1RB_Left	21.26
n38	15	30	2577.5	DFT	64QAM	Edge_1RB_Right	21.13
n38	15	30	2577.5	DFT	64QAM	Outer_Full	21.66
n38	15	30	2577.5	DFT	256QAM	Inner_Full	21.59
n38	15	30	2577.5	DFT	256QAM	Edge_1RB_Left	19.38
n38	15	30	2577.5	DFT	256QAM	Edge_1RB_Right	19.31
n38	15	30	2577.5	DFT	256QAM	Outer_Full	21.55
n38	15	30	2577.5	CP	QPSK	Inner_Full	24.06
n38	15	30	2577.5	CP	QPSK	Edge_1RB_Left	21.11
n38	15	30	2577.5	CP	QPSK	Edge_1RB_Right	21.09
n38	15	30	2577.5	CP	QPSK	Outer_Full	21.30
n38	15	30	2577.5	CP	16QAM	Inner_Full	23.63
n38	15	30	2577.5	CP	16QAM	Edge_1RB_Left	21.14
n38	15	30	2577.5	CP	16QAM	Edge_1RB_Right	21.07
n38	15	30	2577.5	CP	16QAM	Outer_Full	21.20
n38	15	30	2577.5	CP	64QAM	Inner_Full	23.30



BAND	BW(MHz)	SCS(kHz)	FREQ(MHz)	OFDM	MODULATION	RB LOCATION	POWER(dBm)
n38	15	30	2577.5	CP	64QAM	Edge_1RB_Left	20.39
n38	15	30	2577.5	CP	64QAM	Edge_1RB_Right	20.37
n38	15	30	2577.5	CP	64QAM	Outer_Full	20.76
n38	15	30	2577.5	CP	256QAM	Inner_Full	20.62
n38	15	30	2577.5	CP	256QAM	Edge_1RB_Left	17.42
n38	15	30	2577.5	CP	256QAM	Edge_1RB_Right	17.36
n38	15	30	2577.5	CP	256QAM	Outer_Full	20.44
n38	15	30	2595	DFT	QPSK	Inner_Full	24.48
n38	15	30	2595	DFT	QPSK	Edge_1RB_Left	20.65
n38	15	30	2595	DFT	QPSK	Edge_1RB_Right	20.76
n38	15	30	2595	DFT	QPSK	Outer_Full	23.25
n38	15	30	2595	DFT	16QAM	Inner_Full	24.12
n38	15	30	2595	DFT	16QAM	Edge_1RB_Left	21.89
n38	15	30	2595	DFT	16QAM	Edge_1RB_Right	21.93
n38	15	30	2595	DFT	16QAM	Outer_Full	22.09
n38	15	30	2595	DFT	64QAM	Inner_Full	22.71
n38	15	30	2595	DFT	64QAM	Edge_1RB_Left	21.33
n38	15	30	2595	DFT	64QAM	Edge_1RB_Right	21.33
n38	15	30	2595	DFT	64QAM	Outer_Full	21.72
n38	15	30	2595	DFT	256QAM	Inner_Full	21.17
n38	15	30	2595	DFT	256QAM	Edge_1RB_Left	19.34
n38	15	30	2595	DFT	256QAM	Edge_1RB_Right	19.42
n38	15	30	2595	DFT	256QAM	Outer_Full	21.26
n38	15	30	2595	CP	QPSK	Inner_Full	23.54
n38	15	30	2595	CP	QPSK	Edge_1RB_Left	21.20
n38	15	30	2595	CP	QPSK	Edge_1RB_Right	21.24
n38	15	30	2595	CP	QPSK	Outer_Full	21.25
n38	15	30	2595	CP	16QAM	Inner_Full	23.22
n38	15	30	2595	CP	16QAM	Edge_1RB_Left	21.19
n38	15	30	2595	CP	16QAM	Edge_1RB_Right	21.15
n38	15	30	2595	CP	16QAM	Outer_Full	21.26
n38	15	30	2595	CP	64QAM	Inner_Full	22.85
n38	15	30	2595	CP	64QAM	Edge_1RB_Left	20.44
n38	15	30	2595	CP	64QAM	Edge_1RB_Right	20.47
n38	15	30	2595	CP	64QAM	Outer_Full	20.75
n38	15	30	2595	CP	256QAM	Inner_Full	20.22
n38	15	30	2595	CP	256QAM	Edge_1RB_Left	17.44
n38	15	30	2595	CP	256QAM	Edge_1RB_Right	17.50
n38	15	30	2595	CP	256QAM	Outer_Full	20.16
n38	15	30	2612.5	DFT	QPSK	Inner_Full	24.44
n38	15	30	2612.5	DFT	QPSK	Edge_1RB_Left	20.71



BAND	BW(MHz)	SCS(kHz)	FREQ(MHz)	OFDM	MODULATION	RB LOCATION	POWER(dBm)
n38	15	30	2612.5	DFT	QPSK	Edge_1RB_Right	20.67
n38	15	30	2612.5	DFT	QPSK	Outer_Full	23.31
n38	15	30	2612.5	DFT	16QAM	Inner_Full	24.06
n38	15	30	2612.5	DFT	16QAM	Edge_1RB_Left	21.79
n38	15	30	2612.5	DFT	16QAM	Edge_1RB_Right	21.92
n38	15	30	2612.5	DFT	16QAM	Outer_Full	22.18
n38	15	30	2612.5	DFT	64QAM	Inner_Full	22.96
n38	15	30	2612.5	DFT	64QAM	Edge_1RB_Left	21.27
n38	15	30	2612.5	DFT	64QAM	Edge_1RB_Right	21.36
n38	15	30	2612.5	DFT	64QAM	Outer_Full	21.72
n38	15	30	2612.5	DFT	256QAM	Inner_Full	21.44
n38	15	30	2612.5	DFT	256QAM	Edge_1RB_Left	19.43
n38	15	30	2612.5	DFT	256QAM	Edge_1RB_Right	19.48
n38	15	30	2612.5	DFT	256QAM	Outer_Full	21.50
n38	15	30	2612.5	CP	QPSK	Inner_Full	23.82
n38	15	30	2612.5	CP	QPSK	Edge_1RB_Left	21.20
n38	15	30	2612.5	CP	QPSK	Edge_1RB_Right	21.28
n38	15	30	2612.5	CP	QPSK	Outer_Full	21.33
n38	15	30	2612.5	CP	16QAM	Inner_Full	23.39
n38	15	30	2612.5	CP	16QAM	Edge_1RB_Left	20.99
n38	15	30	2612.5	CP	16QAM	Edge_1RB_Right	21.03
n38	15	30	2612.5	CP	16QAM	Outer_Full	21.36
n38	15	30	2612.5	CP	64QAM	Inner_Full	23.05
n38	15	30	2612.5	CP	64QAM	Edge_1RB_Left	20.43
n38	15	30	2612.5	CP	64QAM	Edge_1RB_Right	20.43
n38	15	30	2612.5	CP	64QAM	Outer_Full	20.75
n38	15	30	2612.5	CP	256QAM	Inner_Full	20.37
n38	15	30	2612.5	CP	256QAM	Edge_1RB_Left	17.43
n38	15	30	2612.5	CP	256QAM	Edge_1RB_Right	17.44
n38	15	30	2612.5	CP	256QAM	Outer_Full	20.38
n38	20	30	2580	DFT	QPSK	Inner_Full	24.30
n38	20	30	2580	DFT	QPSK	Edge_1RB_Left	20.61
n38	20	30	2580	DFT	QPSK	Edge_1RB_Right	20.41
n38	20	30	2580	DFT	QPSK	Outer_Full	23.29
n38	20	30	2580	DFT	16QAM	Inner_Full	24.20
n38	20	30	2580	DFT	16QAM	Edge_1RB_Left	21.75
n38	20	30	2580	DFT	16QAM	Edge_1RB_Right	21.67
n38	20	30	2580	DFT	16QAM	Outer_Full	22.04
n38	20	30	2580	DFT	64QAM	Inner_Full	23.06
n38	20	30	2580	DFT	64QAM	Edge_1RB_Left	20.99
n38	20	30	2580	DFT	64QAM	Edge_1RB_Right	20.96



BAND	BW(MHz)	SCS(kHz)	FREQ(MHz)	OFDM	MODULATION	RB LOCATION	POWER(dBm)
n38	20	30	2580	DFT	64QAM	Outer_Full	21.65
n38	20	30	2580	DFT	256QAM	Inner_Full	21.48
n38	20	30	2580	DFT	256QAM	Edge_1RB_Left	19.27
n38	20	30	2580	DFT	256QAM	Edge_1RB_Right	19.23
n38	20	30	2580	DFT	256QAM	Outer_Full	21.33
n38	20	30	2580	CP	QPSK	Inner_Full	23.87
n38	20	30	2580	CP	QPSK	Edge_1RB_Left	21.16
n38	20	30	2580	CP	QPSK	Edge_1RB_Right	21.00
n38	20	30	2580	CP	QPSK	Outer_Full	20.16
n38	20	30	2580	CP	16QAM	Inner_Full	23.60
n38	20	30	2580	CP	16QAM	Edge_1RB_Left	20.84
n38	20	30	2580	CP	16QAM	Edge_1RB_Right	20.79
n38	20	30	2580	CP	16QAM	Outer_Full	21.08
n38	20	30	2580	CP	64QAM	Inner_Full	23.08
n38	20	30	2580	CP	64QAM	Edge_1RB_Left	20.28
n38	20	30	2580	CP	64QAM	Edge_1RB_Right	20.25
n38	20	30	2580	CP	64QAM	Outer_Full	20.59
n38	20	30	2580	CP	256QAM	Inner_Full	20.47
n38	20	30	2580	CP	256QAM	Edge_1RB_Left	17.27
n38	20	30	2580	CP	256QAM	Edge_1RB_Right	17.21
n38	20	30	2580	CP	256QAM	Outer_Full	20.37
n38	20	30	2595	DFT	QPSK	Inner_Full	24.41
n38	20	30	2595	DFT	QPSK	Edge_1RB_Left	20.58
n38	20	30	2595	DFT	QPSK	Edge_1RB_Right	20.65
n38	20	30	2595	DFT	QPSK	Outer_Full	23.32
n38	20	30	2595	DFT	16QAM	Inner_Full	24.22
n38	20	30	2595	DFT	16QAM	Edge_1RB_Left	21.86
n38	20	30	2595	DFT	16QAM	Edge_1RB_Right	21.97
n38	20	30	2595	DFT	16QAM	Outer_Full	22.14
n38	20	30	2595	DFT	64QAM	Inner_Full	22.74
n38	20	30	2595	DFT	64QAM	Edge_1RB_Left	21.11
n38	20	30	2595	DFT	64QAM	Edge_1RB_Right	21.23
n38	20	30	2595	DFT	64QAM	Outer_Full	21.67
n38	20	30	2595	DFT	256QAM	Inner_Full	21.13
n38	20	30	2595	DFT	256QAM	Edge_1RB_Left	19.39
n38	20	30	2595	DFT	256QAM	Edge_1RB_Right	19.39
n38	20	30	2595	DFT	256QAM	Outer_Full	21.23
n38	20	30	2595	CP	QPSK	Inner_Full	23.63
n38	20	30	2595	CP	QPSK	Edge_1RB_Left	21.16
n38	20	30	2595	CP	QPSK	Edge_1RB_Right	21.25
n38	20	30	2595	CP	QPSK	Outer_Full	20.19



BAND	BW(MHz)	SCS(kHz)	FREQ(MHz)	OFDM	MODULATION	RB LOCATION	POWER(dBm)
n38	20	30	2595	CP	16QAM	Inner_Full	23.17
n38	20	30	2595	CP	16QAM	Edge_1RB_Left	20.99
n38	20	30	2595	CP	16QAM	Edge_1RB_Right	21.16
n38	20	30	2595	CP	16QAM	Outer_Full	21.12
n38	20	30	2595	CP	64QAM	Inner_Full	22.71
n38	20	30	2595	CP	64QAM	Edge_1RB_Left	20.38
n38	20	30	2595	CP	64QAM	Edge_1RB_Right	20.50
n38	20	30	2595	CP	64QAM	Outer_Full	20.64
n38	20	30	2595	CP	256QAM	Inner_Full	20.18
n38	20	30	2595	CP	256QAM	Edge_1RB_Left	17.39
n38	20	30	2595	CP	256QAM	Edge_1RB_Right	17.32
n38	20	30	2595	CP	256QAM	Outer_Full	20.21
n38	20	30	2610	DFT	QPSK	Inner_Full	24.33
n38	20	30	2610	DFT	QPSK	Edge_1RB_Left	20.62
n38	20	30	2610	DFT	QPSK	Edge_1RB_Right	20.63
n38	20	30	2610	DFT	QPSK	Outer_Full	23.42
n38	20	30	2610	DFT	16QAM	Inner_Full	24.27
n38	20	30	2610	DFT	16QAM	Edge_1RB_Left	21.82
n38	20	30	2610	DFT	16QAM	Edge_1RB_Right	21.92
n38	20	30	2610	DFT	16QAM	Outer_Full	22.14
n38	20	30	2610	DFT	64QAM	Inner_Full	22.90
n38	20	30	2610	DFT	64QAM	Edge_1RB_Left	21.14
n38	20	30	2610	DFT	64QAM	Edge_1RB_Right	21.18
n38	20	30	2610	DFT	64QAM	Outer_Full	21.70
n38	20	30	2610	DFT	256QAM	Inner_Full	21.34
n38	20	30	2610	DFT	256QAM	Edge_1RB_Left	19.37
n38	20	30	2610	DFT	256QAM	Edge_1RB_Right	19.46
n38	20	30	2610	DFT	256QAM	Outer_Full	21.29
n38	20	30	2610	CP	QPSK	Inner_Full	23.82
n38	20	30	2610	CP	QPSK	Edge_1RB_Left	21.15
n38	20	30	2610	CP	QPSK	Edge_1RB_Right	21.20
n38	20	30	2610	CP	QPSK	Outer_Full	20.33
n38	20	30	2610	CP	16QAM	Inner_Full	23.41
n38	20	30	2610	CP	16QAM	Edge_1RB_Left	20.88
n38	20	30	2610	CP	16QAM	Edge_1RB_Right	21.02
n38	20	30	2610	CP	16QAM	Outer_Full	21.23
n38	20	30	2610	CP	64QAM	Inner_Full	22.92
n38	20	30	2610	CP	64QAM	Edge_1RB_Left	20.37
n38	20	30	2610	CP	64QAM	Edge_1RB_Right	20.52
n38	20	30	2610	CP	64QAM	Outer_Full	20.75
n38	20	30	2610	CP	256QAM	Inner_Full	20.30



BAND	BW(MHz)	SCS(kHz)	FREQ(MHz)	OFDM	MODULATION	RB LOCATION	POWER(dBm)
n38	20	30	2610	CP	256QAM	Edge_1RB_Left	17.33
n38	20	30	2610	CP	256QAM	Edge_1RB_Right	17.42
n38	20	30	2610	CP	256QAM	Outer_Full	20.28
n38	25	30	2582.5	DFT	QPSK	Inner_Full	24.42
n38	25	30	2582.5	DFT	QPSK	Edge_1RB_Left	20.84
n38	25	30	2582.5	DFT	QPSK	Edge_1RB_Right	20.73
n38	25	30	2582.5	DFT	QPSK	Outer_Full	23.38
n38	25	30	2582.5	DFT	16QAM	Inner_Full	24.17
n38	25	30	2582.5	DFT	16QAM	Edge_1RB_Left	22.01
n38	25	30	2582.5	DFT	16QAM	Edge_1RB_Right	21.85
n38	25	30	2582.5	DFT	16QAM	Outer_Full	22.26
n38	25	30	2582.5	DFT	64QAM	Inner_Full	23.05
n38	25	30	2582.5	DFT	64QAM	Edge_1RB_Left	21.50
n38	25	30	2582.5	DFT	64QAM	Edge_1RB_Right	21.38
n38	25	30	2582.5	DFT	64QAM	Outer_Full	21.81
n38	25	30	2582.5	DFT	256QAM	Inner_Full	21.46
n38	25	30	2582.5	DFT	256QAM	Edge_1RB_Left	19.62
n38	25	30	2582.5	DFT	256QAM	Edge_1RB_Right	19.48
n38	25	30	2582.5	DFT	256QAM	Outer_Full	21.41
n38	25	30	2582.5	CP	QPSK	Inner_Full	23.92
n38	25	30	2582.5	CP	QPSK	Edge_1RB_Left	21.30
n38	25	30	2582.5	CP	QPSK	Edge_1RB_Right	21.30
n38	25	30	2582.5	CP	QPSK	Outer_Full	21.44
n38	25	30	2582.5	CP	16QAM	Inner_Full	23.46
n38	25	30	2582.5	CP	16QAM	Edge_1RB_Left	21.17
n38	25	30	2582.5	CP	16QAM	Edge_1RB_Right	21.08
n38	25	30	2582.5	CP	16QAM	Outer_Full	21.31
n38	25	30	2582.5	CP	64QAM	Inner_Full	23.04
n38	25	30	2582.5	CP	64QAM	Edge_1RB_Left	20.62
n38	25	30	2582.5	CP	64QAM	Edge_1RB_Right	20.54
n38	25	30	2582.5	CP	64QAM	Outer_Full	20.87
n38	25	30	2582.5	CP	256QAM	Inner_Full	20.48
n38	25	30	2582.5	CP	256QAM	Edge_1RB_Left	17.59
n38	25	30	2582.5	CP	256QAM	Edge_1RB_Right	17.49
n38	25	30	2582.5	CP	256QAM	Outer_Full	20.36
n38	25	30	2595	DFT	QPSK	Inner_Full	24.41
n38	25	30	2595	DFT	QPSK	Edge_1RB_Left	20.92
n38	25	30	2595	DFT	QPSK	Edge_1RB_Right	20.85
n38	25	30	2595	DFT	QPSK	Outer_Full	23.45
n38	25	30	2595	DFT	16QAM	Inner_Full	24.07
n38	25	30	2595	DFT	16QAM	Edge_1RB_Left	22.22



BAND	BW(MHz)	SCS(kHz)	FREQ(MHz)	OFDM	MODULATION	RB LOCATION	POWER(dBm)
n38	25	30	2595	DFT	16QAM	Edge_1RB_Right	22.14
n38	25	30	2595	DFT	16QAM	Outer_Full	22.34
n38	25	30	2595	DFT	64QAM	Inner_Full	22.78
n38	25	30	2595	DFT	64QAM	Edge_1RB_Left	21.44
n38	25	30	2595	DFT	64QAM	Edge_1RB_Right	21.37
n38	25	30	2595	DFT	64QAM	Outer_Full	21.84
n38	25	30	2595	DFT	256QAM	Inner_Full	21.14
n38	25	30	2595	DFT	256QAM	Edge_1RB_Left	19.74
n38	25	30	2595	DFT	256QAM	Edge_1RB_Right	19.68
n38	25	30	2595	DFT	256QAM	Outer_Full	21.35
n38	25	30	2595	CP	QPSK	Inner_Full	23.67
n38	25	30	2595	CP	QPSK	Edge_1RB_Left	21.45
n38	25	30	2595	CP	QPSK	Edge_1RB_Right	21.40
n38	25	30	2595	CP	QPSK	Outer_Full	21.47
n38	25	30	2595	CP	16QAM	Inner_Full	23.24
n38	25	30	2595	CP	16QAM	Edge_1RB_Left	21.43
n38	25	30	2595	CP	16QAM	Edge_1RB_Right	21.41
n38	25	30	2595	CP	16QAM	Outer_Full	21.32
n38	25	30	2595	CP	64QAM	Inner_Full	22.82
n38	25	30	2595	CP	64QAM	Edge_1RB_Left	20.64
n38	25	30	2595	CP	64QAM	Edge_1RB_Right	20.63
n38	25	30	2595	CP	64QAM	Outer_Full	20.91
n38	25	30	2595	CP	256QAM	Inner_Full	20.26
n38	25	30	2595	CP	256QAM	Edge_1RB_Left	17.63
n38	25	30	2595	CP	256QAM	Edge_1RB_Right	17.59
n38	25	30	2595	CP	256QAM	Outer_Full	20.29
n38	25	30	2607.5	DFT	QPSK	Inner_Full	24.38
n38	25	30	2607.5	DFT	QPSK	Edge_1RB_Left	20.78
n38	25	30	2607.5	DFT	QPSK	Edge_1RB_Right	20.87
n38	25	30	2607.5	DFT	QPSK	Outer_Full	23.41
n38	25	30	2607.5	DFT	16QAM	Inner_Full	24.15
n38	25	30	2607.5	DFT	16QAM	Edge_1RB_Left	22.03
n38	25	30	2607.5	DFT	16QAM	Edge_1RB_Right	22.14
n38	25	30	2607.5	DFT	16QAM	Outer_Full	22.37
n38	25	30	2607.5	DFT	64QAM	Inner_Full	22.85
n38	25	30	2607.5	DFT	64QAM	Edge_1RB_Left	21.34
n38	25	30	2607.5	DFT	64QAM	Edge_1RB_Right	21.39
n38	25	30	2607.5	DFT	64QAM	Outer_Full	21.87
n38	25	30	2607.5	DFT	256QAM	Inner_Full	21.30
n38	25	30	2607.5	DFT	256QAM	Edge_1RB_Left	19.58
n38	25	30	2607.5	DFT	256QAM	Edge_1RB_Right	19.64



BAND	BW(MHz)	SCS(kHz)	FREQ(MHz)	OFDM	MODULATION	RB LOCATION	POWER(dBm)
n38	25	30	2607.5	DFT	256QAM	Outer_Full	21.43
n38	25	30	2607.5	CP	QPSK	Inner_Full	23.74
n38	25	30	2607.5	CP	QPSK	Edge_1RB_Left	21.35
n38	25	30	2607.5	CP	QPSK	Edge_1RB_Right	21.46
n38	25	30	2607.5	CP	QPSK	Outer_Full	21.44
n38	25	30	2607.5	CP	16QAM	Inner_Full	23.32
n38	25	30	2607.5	CP	16QAM	Edge_1RB_Left	21.18
n38	25	30	2607.5	CP	16QAM	Edge_1RB_Right	21.31
n38	25	30	2607.5	CP	16QAM	Outer_Full	21.33
n38	25	30	2607.5	CP	64QAM	Inner_Full	22.91
n38	25	30	2607.5	CP	64QAM	Edge_1RB_Left	20.54
n38	25	30	2607.5	CP	64QAM	Edge_1RB_Right	20.60
n38	25	30	2607.5	CP	64QAM	Outer_Full	20.89
n38	25	30	2607.5	CP	256QAM	Inner_Full	20.37
n38	25	30	2607.5	CP	256QAM	Edge_1RB_Left	17.59
n38	25	30	2607.5	CP	256QAM	Edge_1RB_Right	17.59
n38	25	30	2607.5	CP	256QAM	Outer_Full	20.38
n38	30	30	2585	DFT	QPSK	Inner_Full	24.46
n38	30	30	2585	DFT	QPSK	Edge_1RB_Left	20.83
n38	30	30	2585	DFT	QPSK	Edge_1RB_Right	20.76
n38	30	30	2585	DFT	QPSK	Outer_Full	23.45
n38	30	30	2585	DFT	16QAM	Inner_Full	24.24
n38	30	30	2585	DFT	16QAM	Edge_1RB_Left	22.05
n38	30	30	2585	DFT	16QAM	Edge_1RB_Right	21.92
n38	30	30	2585	DFT	16QAM	Outer_Full	22.34
n38	30	30	2585	DFT	64QAM	Inner_Full	23.07
n38	30	30	2585	DFT	64QAM	Edge_1RB_Left	21.57
n38	30	30	2585	DFT	64QAM	Edge_1RB_Right	21.43
n38	30	30	2585	DFT	64QAM	Outer_Full	21.84
n38	30	30	2585	DFT	256QAM	Inner_Full	21.50
n38	30	30	2585	DFT	256QAM	Edge_1RB_Left	19.64
n38	30	30	2585	DFT	256QAM	Edge_1RB_Right	19.52
n38	30	30	2585	DFT	256QAM	Outer_Full	21.38
n38	30	30	2585	CP	QPSK	Inner_Full	23.85
n38	30	30	2585	CP	QPSK	Edge_1RB_Left	21.39
n38	30	30	2585	CP	QPSK	Edge_1RB_Right	21.37
n38	30	30	2585	CP	QPSK	Outer_Full	21.40
n38	30	30	2585	CP	16QAM	Inner_Full	23.44
n38	30	30	2585	CP	16QAM	Edge_1RB_Left	21.15
n38	30	30	2585	CP	16QAM	Edge_1RB_Right	21.05
n38	30	30	2585	CP	16QAM	Outer_Full	21.41



BAND	BW(MHz)	SCS(kHz)	FREQ(MHz)	OFDM	MODULATION	RB LOCATION	POWER(dBm)
n38	30	30	2585	CP	64QAM	Inner_Full	22.97
n38	30	30	2585	CP	64QAM	Edge_1RB_Left	20.66
n38	30	30	2585	CP	64QAM	Edge_1RB_Right	20.54
n38	30	30	2585	CP	64QAM	Outer_Full	20.80
n38	30	30	2585	CP	256QAM	Inner_Full	20.47
n38	30	30	2585	CP	256QAM	Edge_1RB_Left	17.62
n38	30	30	2585	CP	256QAM	Edge_1RB_Right	17.52
n38	30	30	2585	CP	256QAM	Outer_Full	20.34
n38	30	30	2595	DFT	QPSK	Inner_Full	24.39
n38	30	30	2595	DFT	QPSK	Edge_1RB_Left	20.94
n38	30	30	2595	DFT	QPSK	Edge_1RB_Right	20.89
n38	30	30	2595	DFT	QPSK	Outer_Full	23.45
n38	30	30	2595	DFT	16QAM	Inner_Full	24.22
n38	30	30	2595	DFT	16QAM	Edge_1RB_Left	22.12
n38	30	30	2595	DFT	16QAM	Edge_1RB_Right	22.06
n38	30	30	2595	DFT	16QAM	Outer_Full	22.37
n38	30	30	2595	DFT	64QAM	Inner_Full	22.74
n38	30	30	2595	DFT	64QAM	Edge_1RB_Left	21.57
n38	30	30	2595	DFT	64QAM	Edge_1RB_Right	21.50
n38	30	30	2595	DFT	64QAM	Outer_Full	21.85
n38	30	30	2595	DFT	256QAM	Inner_Full	21.23
n38	30	30	2595	DFT	256QAM	Edge_1RB_Left	19.69
n38	30	30	2595	DFT	256QAM	Edge_1RB_Right	19.65
n38	30	30	2595	DFT	256QAM	Outer_Full	21.38
n38	30	30	2595	CP	QPSK	Inner_Full	23.64
n38	30	30	2595	CP	QPSK	Edge_1RB_Left	21.45
n38	30	30	2595	CP	QPSK	Edge_1RB_Right	21.41
n38	30	30	2595	CP	QPSK	Outer_Full	21.35
n38	30	30	2595	CP	16QAM	Inner_Full	23.23
n38	30	30	2595	CP	16QAM	Edge_1RB_Left	21.22
n38	30	30	2595	CP	16QAM	Edge_1RB_Right	21.23
n38	30	30	2595	CP	16QAM	Outer_Full	21.42
n38	30	30	2595	CP	64QAM	Inner_Full	22.77
n38	30	30	2595	CP	64QAM	Edge_1RB_Left	20.69
n38	30	30	2595	CP	64QAM	Edge_1RB_Right	20.72
n38	30	30	2595	CP	64QAM	Outer_Full	20.92
n38	30	30	2595	CP	256QAM	Inner_Full	20.35
n38	30	30	2595	CP	256QAM	Edge_1RB_Left	17.69
n38	30	30	2595	CP	256QAM	Edge_1RB_Right	17.61
n38	30	30	2595	CP	256QAM	Outer_Full	20.30
n38	30	30	2605	DFT	QPSK	Inner_Full	24.45



BAND	BW(MHz)	SCS(kHz)	FREQ(MHz)	OFDM	MODULATION	RB LOCATION	POWER(dBm)
n38	30	30	2605	DFT	QPSK	Edge_1RB_Left	20.82
n38	30	30	2605	DFT	QPSK	Edge_1RB_Right	20.87
n38	30	30	2605	DFT	QPSK	Outer_Full	23.46
n38	30	30	2605	DFT	16QAM	Inner_Full	24.04
n38	30	30	2605	DFT	16QAM	Edge_1RB_Left	22.08
n38	30	30	2605	DFT	16QAM	Edge_1RB_Right	22.17
n38	30	30	2605	DFT	16QAM	Outer_Full	22.39
n38	30	30	2605	DFT	64QAM	Inner_Full	22.68
n38	30	30	2605	DFT	64QAM	Edge_1RB_Left	21.33
n38	30	30	2605	DFT	64QAM	Edge_1RB_Right	21.39
n38	30	30	2605	DFT	64QAM	Outer_Full	21.88
n38	30	30	2605	DFT	256QAM	Inner_Full	21.36
n38	30	30	2605	DFT	256QAM	Edge_1RB_Left	19.56
n38	30	30	2605	DFT	256QAM	Edge_1RB_Right	19.61
n38	30	30	2605	DFT	256QAM	Outer_Full	21.37
n38	30	30	2605	CP	QPSK	Inner_Full	23.78
n38	30	30	2605	CP	QPSK	Edge_1RB_Left	21.38
n38	30	30	2605	CP	QPSK	Edge_1RB_Right	21.37
n38	30	30	2605	CP	QPSK	Outer_Full	21.32
n38	30	30	2605	CP	16QAM	Inner_Full	23.33
n38	30	30	2605	CP	16QAM	Edge_1RB_Left	21.08
n38	30	30	2605	CP	16QAM	Edge_1RB_Right	21.18
n38	30	30	2605	CP	16QAM	Outer_Full	21.38
n38	30	30	2605	CP	64QAM	Inner_Full	22.82
n38	30	30	2605	CP	64QAM	Edge_1RB_Left	20.62
n38	30	30	2605	CP	64QAM	Edge_1RB_Right	20.73
n38	30	30	2605	CP	64QAM	Outer_Full	20.91
n38	30	30	2605	CP	256QAM	Inner_Full	20.34
n38	30	30	2605	CP	256QAM	Edge_1RB_Left	17.60
n38	30	30	2605	CP	256QAM	Edge_1RB_Right	17.64
n38	30	30	2605	CP	256QAM	Outer_Full	20.40
n38	40	30	2590	DFT	QPSK	Inner_Full	24.51
n38	40	30	2590	DFT	QPSK	Edge_1RB_Left	20.86
n38	40	30	2590	DFT	QPSK	Edge_1RB_Right	20.86
n38	40	30	2590	DFT	QPSK	Outer_Full	23.63
n38	40	30	2590	DFT	16QAM	Inner_Full	24.23
n38	40	30	2590	DFT	16QAM	Edge_1RB_Left	22.02
n38	40	30	2590	DFT	16QAM	Edge_1RB_Right	21.98
n38	40	30	2590	DFT	16QAM	Outer_Full	22.43
n38	40	30	2590	DFT	64QAM	Inner_Full	22.87
n38	40	30	2590	DFT	64QAM	Edge_1RB_Left	21.40



BAND	BW(MHz)	SCS(kHz)	FREQ(MHz)	OFDM	MODULATION	RB LOCATION	POWER(dBm)
n38	40	30	2590	DFT	64QAM	Edge_1RB_Right	21.33
n38	40	30	2590	DFT	64QAM	Outer_Full	21.90
n38	40	30	2590	DFT	256QAM	Inner_Full	21.35
n38	40	30	2590	DFT	256QAM	Edge_1RB_Left	19.61
n38	40	30	2590	DFT	256QAM	Edge_1RB_Right	19.61
n38	40	30	2590	DFT	256QAM	Outer_Full	21.46
n38	40	30	2590	CP	QPSK	Inner_Full	23.82
n38	40	30	2590	CP	QPSK	Edge_1RB_Left	21.42
n38	40	30	2590	CP	QPSK	Edge_1RB_Right	21.40
n38	40	30	2590	CP	QPSK	Outer_Full	21.51
n38	40	30	2590	CP	16QAM	Inner_Full	23.35
n38	40	30	2590	CP	16QAM	Edge_1RB_Left	21.15
n38	40	30	2590	CP	16QAM	Edge_1RB_Right	21.18
n38	40	30	2590	CP	16QAM	Outer_Full	21.47
n38	40	30	2590	CP	64QAM	Inner_Full	22.89
n38	40	30	2590	CP	64QAM	Edge_1RB_Left	20.65
n38	40	30	2590	CP	64QAM	Edge_1RB_Right	20.67
n38	40	30	2590	CP	64QAM	Outer_Full	20.92
n38	40	30	2590	CP	256QAM	Inner_Full	20.43
n38	40	30	2590	CP	256QAM	Edge_1RB_Left	17.55
n38	40	30	2590	CP	256QAM	Edge_1RB_Right	17.58
n38	40	30	2590	CP	256QAM	Outer_Full	20.45
n38	40	30	2595	DFT	QPSK	Inner_Full	24.44
n38	40	30	2595	DFT	QPSK	Edge_1RB_Left	20.94
n38	40	30	2595	DFT	QPSK	Edge_1RB_Right	20.83
n38	40	30	2595	DFT	QPSK	Outer_Full	23.56
n38	40	30	2595	DFT	16QAM	Inner_Full	24.22
n38	40	30	2595	DFT	16QAM	Edge_1RB_Left	22.09
n38	40	30	2595	DFT	16QAM	Edge_1RB_Right	22.14
n38	40	30	2595	DFT	16QAM	Outer_Full	22.39
n38	40	30	2595	DFT	64QAM	Inner_Full	22.77
n38	40	30	2595	DFT	64QAM	Edge_1RB_Left	21.39
n38	40	30	2595	DFT	64QAM	Edge_1RB_Right	21.47
n38	40	30	2595	DFT	64QAM	Outer_Full	21.86
n38	40	30	2595	DFT	256QAM	Inner_Full	21.25
n38	40	30	2595	DFT	256QAM	Edge_1RB_Left	19.69
n38	40	30	2595	DFT	256QAM	Edge_1RB_Right	19.61
n38	40	30	2595	DFT	256QAM	Outer_Full	21.46
n38	40	30	2595	CP	QPSK	Inner_Full	23.73
n38	40	30	2595	CP	QPSK	Edge_1RB_Left	21.45
n38	40	30	2595	CP	QPSK	Edge_1RB_Right	21.38



BAND	BW(MHz)	SCS(kHz)	FREQ(MHz)	OFDM	MODULATION	RB LOCATION	POWER(dBm)
n38	40	30	2595	CP	QPSK	Outer_Full	21.44
n38	40	30	2595	CP	16QAM	Inner_Full	23.23
n38	40	30	2595	CP	16QAM	Edge_1RB_Left	21.21
n38	40	30	2595	CP	16QAM	Edge_1RB_Right	21.24
n38	40	30	2595	CP	16QAM	Outer_Full	21.34
n38	40	30	2595	CP	64QAM	Inner_Full	22.84
n38	40	30	2595	CP	64QAM	Edge_1RB_Left	20.57
n38	40	30	2595	CP	64QAM	Edge_1RB_Right	20.63
n38	40	30	2595	CP	64QAM	Outer_Full	20.96
n38	40	30	2595	CP	256QAM	Inner_Full	20.33
n38	40	30	2595	CP	256QAM	Edge_1RB_Left	17.58
n38	40	30	2595	CP	256QAM	Edge_1RB_Right	17.62
n38	40	30	2595	CP	256QAM	Outer_Full	20.47
n38	40	30	2600	DFT	QPSK	Inner_Full	24.41
n38	40	30	2600	DFT	QPSK	Edge_1RB_Left	20.85
n38	40	30	2600	DFT	QPSK	Edge_1RB_Right	20.86
n38	40	30	2600	DFT	QPSK	Outer_Full	23.49
n38	40	30	2600	DFT	16QAM	Inner_Full	24.20
n38	40	30	2600	DFT	16QAM	Edge_1RB_Left	22.13
n38	40	30	2600	DFT	16QAM	Edge_1RB_Right	22.10
n38	40	30	2600	DFT	16QAM	Outer_Full	22.34
n38	40	30	2600	DFT	64QAM	Inner_Full	22.76
n38	40	30	2600	DFT	64QAM	Edge_1RB_Left	21.40
n38	40	30	2600	DFT	64QAM	Edge_1RB_Right	21.34
n38	40	30	2600	DFT	64QAM	Outer_Full	21.83
n38	40	30	2600	DFT	256QAM	Inner_Full	21.19
n38	40	30	2600	DFT	256QAM	Edge_1RB_Left	19.60
n38	40	30	2600	DFT	256QAM	Edge_1RB_Right	19.58
n38	40	30	2600	DFT	256QAM	Outer_Full	21.46
n38	40	30	2600	CP	QPSK	Inner_Full	23.68
n38	40	30	2600	CP	QPSK	Edge_1RB_Left	21.43
n38	40	30	2600	CP	QPSK	Edge_1RB_Right	21.38
n38	40	30	2600	CP	QPSK	Outer_Full	21.41
n38	40	30	2600	CP	16QAM	Inner_Full	23.18
n38	40	30	2600	CP	16QAM	Edge_1RB_Left	21.24
n38	40	30	2600	CP	16QAM	Edge_1RB_Right	21.20
n38	40	30	2600	CP	16QAM	Outer_Full	21.31
n38	40	30	2600	CP	64QAM	Inner_Full	22.78
n38	40	30	2600	CP	64QAM	Edge_1RB_Left	20.46
n38	40	30	2600	CP	64QAM	Edge_1RB_Right	20.63
n38	40	30	2600	CP	64QAM	Outer_Full	20.83



No.24T04N001537-009-RF NR

BAND	BW(MHz)	SCS(kHz)	FREQ(MHz)	OFDM	MODULATION	RB LOCATION	POWER(dBm)
n38	40	30	2600	CP	256QAM	Inner_Full	20.24
n38	40	30	2600	CP	256QAM	Edge_1RB_Left	17.63
n38	40	30	2600	CP	256QAM	Edge_1RB_Right	17.56
n38	40	30	2600	CP	256QAM	Outer_Full	20.45



n41

BAND	BW(MHz)	SCS(kHz)	FREQ(MHz)	OFDM	MODULATION	RB LOCATION	POWER(dBm)
n41	10	30	2501.01	DFT	QPSK	Inner_Full	25.80
n41	10	30	2501.01	DFT	QPSK	Edge_1RB_Left	22.09
n41	10	30	2501.01	DFT	QPSK	Edge_1RB_Right	22.11
n41	10	30	2501.01	DFT	QPSK	Outer_Full	23.74
n41	10	30	2501.01	DFT	16QAM	Inner_Full	24.72
n41	10	30	2501.01	DFT	16QAM	Edge_1RB_Left	21.94
n41	10	30	2501.01	DFT	16QAM	Edge_1RB_Right	21.96
n41	10	30	2501.01	DFT	16QAM	Outer_Full	22.66
n41	10	30	2501.01	DFT	64QAM	Inner_Full	23.17
n41	10	30	2501.01	DFT	64QAM	Edge_1RB_Left	21.82
n41	10	30	2501.01	DFT	64QAM	Edge_1RB_Right	21.85
n41	10	30	2501.01	DFT	64QAM	Outer_Full	23.35
n41	10	30	2501.01	DFT	256QAM	Inner_Full	21.12
n41	10	30	2501.01	DFT	256QAM	Edge_1RB_Left	21.00
n41	10	30	2501.01	DFT	256QAM	Edge_1RB_Right	21.00
n41	10	30	2501.01	DFT	256QAM	Outer_Full	21.09
n41	10	30	2501.01	CP	QPSK	Inner_Full	24.21
n41	10	30	2501.01	CP	QPSK	Edge_1RB_Left	22.07
n41	10	30	2501.01	CP	QPSK	Edge_1RB_Right	22.16
n41	10	30	2501.01	CP	QPSK	Outer_Full	21.64
n41	10	30	2501.01	CP	16QAM	Inner_Full	23.76
n41	10	30	2501.01	CP	16QAM	Edge_1RB_Left	22.04
n41	10	30	2501.01	CP	16QAM	Edge_1RB_Right	22.14
n41	10	30	2501.01	CP	16QAM	Outer_Full	21.69
n41	10	30	2501.01	CP	64QAM	Inner_Full	22.20
n41	10	30	2501.01	CP	64QAM	Edge_1RB_Left	21.84
n41	10	30	2501.01	CP	64QAM	Edge_1RB_Right	21.94
n41	10	30	2501.01	CP	64QAM	Outer_Full	21.23
n41	10	30	2501.01	CP	256QAM	Inner_Full	19.11
n41	10	30	2501.01	CP	256QAM	Edge_1RB_Left	18.93
n41	10	30	2501.01	CP	256QAM	Edge_1RB_Right	18.91
n41	10	30	2501.01	CP	256QAM	Outer_Full	19.16
n41	10	30	2592.99	DFT	QPSK	Inner_Full	25.73
n41	10	30	2592.99	DFT	QPSK	Edge_1RB_Left	22.06
n41	10	30	2592.99	DFT	QPSK	Edge_1RB_Right	22.13
n41	10	30	2592.99	DFT	QPSK	Outer_Full	23.69
n41	10	30	2592.99	DFT	16QAM	Inner_Full	24.78
n41	10	30	2592.99	DFT	16QAM	Edge_1RB_Left	21.73
n41	10	30	2592.99	DFT	16QAM	Edge_1RB_Right	21.86



BAND	BW(MHz)	SCS(kHz)	FREQ(MHz)	OFDM	MODULATION	RB LOCATION	POWER(dBm)
n41	10	30	2592.99	DFT	16QAM	Outer_Full	22.68
n41	10	30	2592.99	DFT	64QAM	Inner_Full	23.17
n41	10	30	2592.99	DFT	64QAM	Edge_1RB_Left	21.62
n41	10	30	2592.99	DFT	64QAM	Edge_1RB_Right	21.76
n41	10	30	2592.99	DFT	64QAM	Outer_Full	23.20
n41	10	30	2592.99	DFT	256QAM	Inner_Full	21.07
n41	10	30	2592.99	DFT	256QAM	Edge_1RB_Left	20.94
n41	10	30	2592.99	DFT	256QAM	Edge_1RB_Right	20.98
n41	10	30	2592.99	DFT	256QAM	Outer_Full	21.11
n41	10	30	2592.99	CP	QPSK	Inner_Full	24.17
n41	10	30	2592.99	CP	QPSK	Edge_1RB_Left	22.06
n41	10	30	2592.99	CP	QPSK	Edge_1RB_Right	22.15
n41	10	30	2592.99	CP	QPSK	Outer_Full	21.74
n41	10	30	2592.99	CP	16QAM	Inner_Full	23.79
n41	10	30	2592.99	CP	16QAM	Edge_1RB_Left	21.94
n41	10	30	2592.99	CP	16QAM	Edge_1RB_Right	21.99
n41	10	30	2592.99	CP	16QAM	Outer_Full	21.72
n41	10	30	2592.99	CP	64QAM	Inner_Full	22.21
n41	10	30	2592.99	CP	64QAM	Edge_1RB_Left	21.85
n41	10	30	2592.99	CP	64QAM	Edge_1RB_Right	21.79
n41	10	30	2592.99	CP	64QAM	Outer_Full	21.18
n41	10	30	2592.99	CP	256QAM	Inner_Full	19.08
n41	10	30	2592.99	CP	256QAM	Edge_1RB_Left	18.83
n41	10	30	2592.99	CP	256QAM	Edge_1RB_Right	18.90
n41	10	30	2592.99	CP	256QAM	Outer_Full	19.12
n41	10	30	2685	DFT	QPSK	Inner_Full	25.92
n41	10	30	2685	DFT	QPSK	Edge_1RB_Left	22.12
n41	10	30	2685	DFT	QPSK	Edge_1RB_Right	22.28
n41	10	30	2685	DFT	QPSK	Outer_Full	23.75
n41	10	30	2685	DFT	16QAM	Inner_Full	24.77
n41	10	30	2685	DFT	16QAM	Edge_1RB_Left	21.94
n41	10	30	2685	DFT	16QAM	Edge_1RB_Right	21.98
n41	10	30	2685	DFT	16QAM	Outer_Full	22.82
n41	10	30	2685	DFT	64QAM	Inner_Full	23.28
n41	10	30	2685	DFT	64QAM	Edge_1RB_Left	21.78
n41	10	30	2685	DFT	64QAM	Edge_1RB_Right	21.86
n41	10	30	2685	DFT	64QAM	Outer_Full	23.27
n41	10	30	2685	DFT	256QAM	Inner_Full	21.16
n41	10	30	2685	DFT	256QAM	Edge_1RB_Left	21.01
n41	10	30	2685	DFT	256QAM	Edge_1RB_Right	21.01
n41	10	30	2685	DFT	256QAM	Outer_Full	21.16



BAND	BW(MHz)	SCS(kHz)	FREQ(MHz)	OFDM	MODULATION	RB LOCATION	POWER(dBm)
n41	10	30	2685	CP	QPSK	Inner_Full	24.32
n41	10	30	2685	CP	QPSK	Edge_1RB_Left	22.17
n41	10	30	2685	CP	QPSK	Edge_1RB_Right	22.24
n41	10	30	2685	CP	QPSK	Outer_Full	21.80
n41	10	30	2685	CP	16QAM	Inner_Full	23.81
n41	10	30	2685	CP	16QAM	Edge_1RB_Left	22.05
n41	10	30	2685	CP	16QAM	Edge_1RB_Right	22.06
n41	10	30	2685	CP	16QAM	Outer_Full	21.77
n41	10	30	2685	CP	64QAM	Inner_Full	22.31
n41	10	30	2685	CP	64QAM	Edge_1RB_Left	21.87
n41	10	30	2685	CP	64QAM	Edge_1RB_Right	21.91
n41	10	30	2685	CP	64QAM	Outer_Full	21.33
n41	10	30	2685	CP	256QAM	Inner_Full	19.22
n41	10	30	2685	CP	256QAM	Edge_1RB_Left	18.91
n41	10	30	2685	CP	256QAM	Edge_1RB_Right	18.93
n41	10	30	2685	CP	256QAM	Outer_Full	19.18
n41	15	30	2503.5	DFT	QPSK	Inner_Full	25.89
n41	15	30	2503.5	DFT	QPSK	Edge_1RB_Left	22.04
n41	15	30	2503.5	DFT	QPSK	Edge_1RB_Right	22.14
n41	15	30	2503.5	DFT	QPSK	Outer_Full	23.65
n41	15	30	2503.5	DFT	16QAM	Inner_Full	24.77
n41	15	30	2503.5	DFT	16QAM	Edge_1RB_Left	21.94
n41	15	30	2503.5	DFT	16QAM	Edge_1RB_Right	21.94
n41	15	30	2503.5	DFT	16QAM	Outer_Full	22.67
n41	15	30	2503.5	DFT	64QAM	Inner_Full	23.15
n41	15	30	2503.5	DFT	64QAM	Edge_1RB_Left	21.83
n41	15	30	2503.5	DFT	64QAM	Edge_1RB_Right	21.84
n41	15	30	2503.5	DFT	64QAM	Outer_Full	23.22
n41	15	30	2503.5	DFT	256QAM	Inner_Full	21.14
n41	15	30	2503.5	DFT	256QAM	Edge_1RB_Left	20.99
n41	15	30	2503.5	DFT	256QAM	Edge_1RB_Right	21.08
n41	15	30	2503.5	DFT	256QAM	Outer_Full	21.17
n41	15	30	2503.5	CP	QPSK	Inner_Full	24.51
n41	15	30	2503.5	CP	QPSK	Edge_1RB_Left	22.11
n41	15	30	2503.5	CP	QPSK	Edge_1RB_Right	22.14
n41	15	30	2503.5	CP	QPSK	Outer_Full	21.82
n41	15	30	2503.5	CP	16QAM	Inner_Full	23.80
n41	15	30	2503.5	CP	16QAM	Edge_1RB_Left	22.09
n41	15	30	2503.5	CP	16QAM	Edge_1RB_Right	22.11
n41	15	30	2503.5	CP	16QAM	Outer_Full	21.83
n41	15	30	2503.5	CP	64QAM	Inner_Full	22.32



BAND	BW(MHz)	SCS(kHz)	FREQ(MHz)	OFDM	MODULATION	RB LOCATION	POWER(dBm)
n41	15	30	2503.5	CP	64QAM	Edge_1RB_Left	21.91
n41	15	30	2503.5	CP	64QAM	Edge_1RB_Right	21.91
n41	15	30	2503.5	CP	64QAM	Outer_Full	21.20
n41	15	30	2503.5	CP	256QAM	Inner_Full	19.17
n41	15	30	2503.5	CP	256QAM	Edge_1RB_Left	18.94
n41	15	30	2503.5	CP	256QAM	Edge_1RB_Right	18.96
n41	15	30	2503.5	CP	256QAM	Outer_Full	19.20
n41	15	30	2592.99	DFT	QPSK	Inner_Full	25.66
n41	15	30	2592.99	DFT	QPSK	Edge_1RB_Left	22.07
n41	15	30	2592.99	DFT	QPSK	Edge_1RB_Right	22.16
n41	15	30	2592.99	DFT	QPSK	Outer_Full	23.58
n41	15	30	2592.99	DFT	16QAM	Inner_Full	24.58
n41	15	30	2592.99	DFT	16QAM	Edge_1RB_Left	21.77
n41	15	30	2592.99	DFT	16QAM	Edge_1RB_Right	21.89
n41	15	30	2592.99	DFT	16QAM	Outer_Full	22.51
n41	15	30	2592.99	DFT	64QAM	Inner_Full	23.07
n41	15	30	2592.99	DFT	64QAM	Edge_1RB_Left	21.67
n41	15	30	2592.99	DFT	64QAM	Edge_1RB_Right	21.69
n41	15	30	2592.99	DFT	64QAM	Outer_Full	23.13
n41	15	30	2592.99	DFT	256QAM	Inner_Full	21.08
n41	15	30	2592.99	DFT	256QAM	Edge_1RB_Left	20.82
n41	15	30	2592.99	DFT	256QAM	Edge_1RB_Right	21.02
n41	15	30	2592.99	DFT	256QAM	Outer_Full	21.11
n41	15	30	2592.99	CP	QPSK	Inner_Full	24.36
n41	15	30	2592.99	CP	QPSK	Edge_1RB_Left	21.98
n41	15	30	2592.99	CP	QPSK	Edge_1RB_Right	22.16
n41	15	30	2592.99	CP	QPSK	Outer_Full	21.65
n41	15	30	2592.99	CP	16QAM	Inner_Full	23.62
n41	15	30	2592.99	CP	16QAM	Edge_1RB_Left	21.90
n41	15	30	2592.99	CP	16QAM	Edge_1RB_Right	22.15
n41	15	30	2592.99	CP	16QAM	Outer_Full	21.65
n41	15	30	2592.99	CP	64QAM	Inner_Full	22.19
n41	15	30	2592.99	CP	64QAM	Edge_1RB_Left	21.75
n41	15	30	2592.99	CP	64QAM	Edge_1RB_Right	21.77
n41	15	30	2592.99	CP	64QAM	Outer_Full	21.13
n41	15	30	2592.99	CP	256QAM	Inner_Full	19.01
n41	15	30	2592.99	CP	256QAM	Edge_1RB_Left	18.82
n41	15	30	2592.99	CP	256QAM	Edge_1RB_Right	18.97
n41	15	30	2592.99	CP	256QAM	Outer_Full	19.10
n41	15	30	2682.48	DFT	QPSK	Inner_Full	25.68
n41	15	30	2682.48	DFT	QPSK	Edge_1RB_Left	22.03



BAND	BW(MHz)	SCS(kHz)	FREQ(MHz)	OFDM	MODULATION	RB LOCATION	POWER(dBm)
n41	15	30	2682.48	DFT	QPSK	Edge_1RB_Right	22.08
n41	15	30	2682.48	DFT	QPSK	Outer_Full	23.67
n41	15	30	2682.48	DFT	16QAM	Inner_Full	24.70
n41	15	30	2682.48	DFT	16QAM	Edge_1RB_Left	21.85
n41	15	30	2682.48	DFT	16QAM	Edge_1RB_Right	21.97
n41	15	30	2682.48	DFT	16QAM	Outer_Full	22.68
n41	15	30	2682.48	DFT	64QAM	Inner_Full	23.09
n41	15	30	2682.48	DFT	64QAM	Edge_1RB_Left	21.78
n41	15	30	2682.48	DFT	64QAM	Edge_1RB_Right	21.83
n41	15	30	2682.48	DFT	64QAM	Outer_Full	23.23
n41	15	30	2682.48	DFT	256QAM	Inner_Full	21.07
n41	15	30	2682.48	DFT	256QAM	Edge_1RB_Left	20.96
n41	15	30	2682.48	DFT	256QAM	Edge_1RB_Right	21.00
n41	15	30	2682.48	DFT	256QAM	Outer_Full	21.19
n41	15	30	2682.48	CP	QPSK	Inner_Full	24.38
n41	15	30	2682.48	CP	QPSK	Edge_1RB_Left	22.04
n41	15	30	2682.48	CP	QPSK	Edge_1RB_Right	22.15
n41	15	30	2682.48	CP	QPSK	Outer_Full	21.77
n41	15	30	2682.48	CP	16QAM	Inner_Full	23.74
n41	15	30	2682.48	CP	16QAM	Edge_1RB_Left	21.94
n41	15	30	2682.48	CP	16QAM	Edge_1RB_Right	22.08
n41	15	30	2682.48	CP	16QAM	Outer_Full	21.77
n41	15	30	2682.48	CP	64QAM	Inner_Full	22.33
n41	15	30	2682.48	CP	64QAM	Edge_1RB_Left	21.81
n41	15	30	2682.48	CP	64QAM	Edge_1RB_Right	21.84
n41	15	30	2682.48	CP	64QAM	Outer_Full	21.24
n41	15	30	2682.48	CP	256QAM	Inner_Full	19.03
n41	15	30	2682.48	CP	256QAM	Edge_1RB_Left	18.88
n41	15	30	2682.48	CP	256QAM	Edge_1RB_Right	18.91
n41	15	30	2682.48	CP	256QAM	Outer_Full	19.14
n41	20	30	2506.02	DFT	QPSK	Inner_Full	25.79
n41	20	30	2506.02	DFT	QPSK	Edge_1RB_Left	22.03
n41	20	30	2506.02	DFT	QPSK	Edge_1RB_Right	22.01
n41	20	30	2506.02	DFT	QPSK	Outer_Full	23.76
n41	20	30	2506.02	DFT	16QAM	Inner_Full	24.66
n41	20	30	2506.02	DFT	16QAM	Edge_1RB_Left	21.84
n41	20	30	2506.02	DFT	16QAM	Edge_1RB_Right	21.84
n41	20	30	2506.02	DFT	16QAM	Outer_Full	22.61
n41	20	30	2506.02	DFT	64QAM	Inner_Full	23.29
n41	20	30	2506.02	DFT	64QAM	Edge_1RB_Left	21.69
n41	20	30	2506.02	DFT	64QAM	Edge_1RB_Right	21.73



BAND	BW(MHz)	SCS(kHz)	FREQ(MHz)	OFDM	MODULATION	RB LOCATION	POWER(dBm)
n41	20	30	2506.02	DFT	64QAM	Outer_Full	23.24
n41	20	30	2506.02	DFT	256QAM	Inner_Full	21.16
n41	20	30	2506.02	DFT	256QAM	Edge_1RB_Left	20.89
n41	20	30	2506.02	DFT	256QAM	Edge_1RB_Right	20.95
n41	20	30	2506.02	DFT	256QAM	Outer_Full	21.23
n41	20	30	2506.02	CP	QPSK	Inner_Full	24.24
n41	20	30	2506.02	CP	QPSK	Edge_1RB_Left	22.07
n41	20	30	2506.02	CP	QPSK	Edge_1RB_Right	22.15
n41	20	30	2506.02	CP	QPSK	Outer_Full	21.69
n41	20	30	2506.02	CP	16QAM	Inner_Full	23.94
n41	20	30	2506.02	CP	16QAM	Edge_1RB_Left	21.84
n41	20	30	2506.02	CP	16QAM	Edge_1RB_Right	22.02
n41	20	30	2506.02	CP	16QAM	Outer_Full	21.70
n41	20	30	2506.02	CP	64QAM	Inner_Full	22.23
n41	20	30	2506.02	CP	64QAM	Edge_1RB_Left	21.78
n41	20	30	2506.02	CP	64QAM	Edge_1RB_Right	21.92
n41	20	30	2506.02	CP	64QAM	Outer_Full	21.09
n41	20	30	2506.02	CP	256QAM	Inner_Full	19.21
n41	20	30	2506.02	CP	256QAM	Edge_1RB_Left	18.79
n41	20	30	2506.02	CP	256QAM	Edge_1RB_Right	18.93
n41	20	30	2506.02	CP	256QAM	Outer_Full	19.24
n41	20	30	2592.99	DFT	QPSK	Inner_Full	25.69
n41	20	30	2592.99	DFT	QPSK	Edge_1RB_Left	21.95
n41	20	30	2592.99	DFT	QPSK	Edge_1RB_Right	22.08
n41	20	30	2592.99	DFT	QPSK	Outer_Full	23.58
n41	20	30	2592.99	DFT	16QAM	Inner_Full	24.65
n41	20	30	2592.99	DFT	16QAM	Edge_1RB_Left	21.72
n41	20	30	2592.99	DFT	16QAM	Edge_1RB_Right	21.87
n41	20	30	2592.99	DFT	16QAM	Outer_Full	22.55
n41	20	30	2592.99	DFT	64QAM	Inner_Full	23.16
n41	20	30	2592.99	DFT	64QAM	Edge_1RB_Left	21.64
n41	20	30	2592.99	DFT	64QAM	Edge_1RB_Right	21.83
n41	20	30	2592.99	DFT	64QAM	Outer_Full	23.08
n41	20	30	2592.99	DFT	256QAM	Inner_Full	21.07
n41	20	30	2592.99	DFT	256QAM	Edge_1RB_Left	20.79
n41	20	30	2592.99	DFT	256QAM	Edge_1RB_Right	21.01
n41	20	30	2592.99	DFT	256QAM	Outer_Full	21.02
n41	20	30	2592.99	CP	QPSK	Inner_Full	24.17
n41	20	30	2592.99	CP	QPSK	Edge_1RB_Left	21.97
n41	20	30	2592.99	CP	QPSK	Edge_1RB_Right	22.22
n41	20	30	2592.99	CP	QPSK	Outer_Full	21.64



BAND	BW(MHz)	SCS(kHz)	FREQ(MHz)	OFDM	MODULATION	RB LOCATION	POWER(dBm)
n41	20	30	2592.99	CP	16QAM	Inner_Full	23.76
n41	20	30	2592.99	CP	16QAM	Edge_1RB_Left	21.83
n41	20	30	2592.99	CP	16QAM	Edge_1RB_Right	22.05
n41	20	30	2592.99	CP	16QAM	Outer_Full	21.57
n41	20	30	2592.99	CP	64QAM	Inner_Full	22.06
n41	20	30	2592.99	CP	64QAM	Edge_1RB_Left	21.67
n41	20	30	2592.99	CP	64QAM	Edge_1RB_Right	21.99
n41	20	30	2592.99	CP	64QAM	Outer_Full	21.09
n41	20	30	2592.99	CP	256QAM	Inner_Full	19.02
n41	20	30	2592.99	CP	256QAM	Edge_1RB_Left	18.75
n41	20	30	2592.99	CP	256QAM	Edge_1RB_Right	18.99
n41	20	30	2592.99	CP	256QAM	Outer_Full	19.11
n41	20	30	2679.99	DFT	QPSK	Inner_Full	25.69
n41	20	30	2679.99	DFT	QPSK	Edge_1RB_Left	21.92
n41	20	30	2679.99	DFT	QPSK	Edge_1RB_Right	22.05
n41	20	30	2679.99	DFT	QPSK	Outer_Full	23.65
n41	20	30	2679.99	DFT	16QAM	Inner_Full	24.69
n41	20	30	2679.99	DFT	16QAM	Edge_1RB_Left	21.79
n41	20	30	2679.99	DFT	16QAM	Edge_1RB_Right	21.86
n41	20	30	2679.99	DFT	16QAM	Outer_Full	22.62
n41	20	30	2679.99	DFT	64QAM	Inner_Full	23.15
n41	20	30	2679.99	DFT	64QAM	Edge_1RB_Left	21.54
n41	20	30	2679.99	DFT	64QAM	Edge_1RB_Right	21.82
n41	20	30	2679.99	DFT	64QAM	Outer_Full	23.10
n41	20	30	2679.99	DFT	256QAM	Inner_Full	21.09
n41	20	30	2679.99	DFT	256QAM	Edge_1RB_Left	20.83
n41	20	30	2679.99	DFT	256QAM	Edge_1RB_Right	20.92
n41	20	30	2679.99	DFT	256QAM	Outer_Full	21.12
n41	20	30	2679.99	CP	QPSK	Inner_Full	24.19
n41	20	30	2679.99	CP	QPSK	Edge_1RB_Left	21.97
n41	20	30	2679.99	CP	QPSK	Edge_1RB_Right	22.18
n41	20	30	2679.99	CP	QPSK	Outer_Full	21.72
n41	20	30	2679.99	CP	16QAM	Inner_Full	23.84
n41	20	30	2679.99	CP	16QAM	Edge_1RB_Left	21.76
n41	20	30	2679.99	CP	16QAM	Edge_1RB_Right	22.05
n41	20	30	2679.99	CP	16QAM	Outer_Full	21.66
n41	20	30	2679.99	CP	64QAM	Inner_Full	22.20
n41	20	30	2679.99	CP	64QAM	Edge_1RB_Left	21.68
n41	20	30	2679.99	CP	64QAM	Edge_1RB_Right	21.87
n41	20	30	2679.99	CP	64QAM	Outer_Full	21.21
n41	20	30	2679.99	CP	256QAM	Inner_Full	19.06



BAND	BW(MHz)	SCS(kHz)	FREQ(MHz)	OFDM	MODULATION	RB LOCATION	POWER(dBm)
n41	20	30	2679.99	CP	256QAM	Edge_1RB_Left	18.63
n41	20	30	2679.99	CP	256QAM	Edge_1RB_Right	18.95
n41	20	30	2679.99	CP	256QAM	Outer_Full	19.19
n41	25	30	2508.51	DFT	QPSK	Inner_Full	25.76
n41	25	30	2508.51	DFT	QPSK	Edge_1RB_Left	22.18
n41	25	30	2508.51	DFT	QPSK	Edge_1RB_Right	22.16
n41	25	30	2508.51	DFT	QPSK	Outer_Full	23.76
n41	25	30	2508.51	DFT	16QAM	Inner_Full	24.76
n41	25	30	2508.51	DFT	16QAM	Edge_1RB_Left	21.90
n41	25	30	2508.51	DFT	16QAM	Edge_1RB_Right	21.98
n41	25	30	2508.51	DFT	16QAM	Outer_Full	22.78
n41	25	30	2508.51	DFT	64QAM	Inner_Full	23.19
n41	25	30	2508.51	DFT	64QAM	Edge_1RB_Left	21.81
n41	25	30	2508.51	DFT	64QAM	Edge_1RB_Right	21.89
n41	25	30	2508.51	DFT	64QAM	Outer_Full	23.16
n41	25	30	2508.51	DFT	256QAM	Inner_Full	21.12
n41	25	30	2508.51	DFT	256QAM	Edge_1RB_Left	21.09
n41	25	30	2508.51	DFT	256QAM	Edge_1RB_Right	21.08
n41	25	30	2508.51	DFT	256QAM	Outer_Full	21.25
n41	25	30	2508.51	CP	QPSK	Inner_Full	24.33
n41	25	30	2508.51	CP	QPSK	Edge_1RB_Left	22.21
n41	25	30	2508.51	CP	QPSK	Edge_1RB_Right	22.24
n41	25	30	2508.51	CP	QPSK	Outer_Full	21.88
n41	25	30	2508.51	CP	16QAM	Inner_Full	23.84
n41	25	30	2508.51	CP	16QAM	Edge_1RB_Left	22.00
n41	25	30	2508.51	CP	16QAM	Edge_1RB_Right	22.11
n41	25	30	2508.51	CP	16QAM	Outer_Full	21.67
n41	25	30	2508.51	CP	64QAM	Inner_Full	22.30
n41	25	30	2508.51	CP	64QAM	Edge_1RB_Left	21.92
n41	25	30	2508.51	CP	64QAM	Edge_1RB_Right	22.00
n41	25	30	2508.51	CP	64QAM	Outer_Full	21.14
n41	25	30	2508.51	CP	256QAM	Inner_Full	19.22
n41	25	30	2508.51	CP	256QAM	Edge_1RB_Left	18.98
n41	25	30	2508.51	CP	256QAM	Edge_1RB_Right	18.99
n41	25	30	2508.51	CP	256QAM	Outer_Full	19.24
n41	25	30	2592.99	DFT	QPSK	Inner_Full	25.88
n41	25	30	2592.99	DFT	QPSK	Edge_1RB_Left	22.19
n41	25	30	2592.99	DFT	QPSK	Edge_1RB_Right	22.41
n41	25	30	2592.99	DFT	QPSK	Outer_Full	23.79
n41	25	30	2592.99	DFT	16QAM	Inner_Full	24.74
n41	25	30	2592.99	DFT	16QAM	Edge_1RB_Left	22.05



BAND	BW(MHz)	SCS(kHz)	FREQ(MHz)	OFDM	MODULATION	RB LOCATION	POWER(dBm)
n41	25	30	2592.99	DFT	16QAM	Edge_1RB_Right	22.11
n41	25	30	2592.99	DFT	16QAM	Outer_Full	22.81
n41	25	30	2592.99	DFT	64QAM	Inner_Full	23.23
n41	25	30	2592.99	DFT	64QAM	Edge_1RB_Left	21.81
n41	25	30	2592.99	DFT	64QAM	Edge_1RB_Right	22.04
n41	25	30	2592.99	DFT	64QAM	Outer_Full	23.27
n41	25	30	2592.99	DFT	256QAM	Inner_Full	21.11
n41	25	30	2592.99	DFT	256QAM	Edge_1RB_Left	21.03
n41	25	30	2592.99	DFT	256QAM	Edge_1RB_Right	21.28
n41	25	30	2592.99	DFT	256QAM	Outer_Full	21.28
n41	25	30	2592.99	CP	QPSK	Inner_Full	24.42
n41	25	30	2592.99	CP	QPSK	Edge_1RB_Left	22.23
n41	25	30	2592.99	CP	QPSK	Edge_1RB_Right	22.45
n41	25	30	2592.99	CP	QPSK	Outer_Full	21.85
n41	25	30	2592.99	CP	16QAM	Inner_Full	23.82
n41	25	30	2592.99	CP	16QAM	Edge_1RB_Left	22.14
n41	25	30	2592.99	CP	16QAM	Edge_1RB_Right	22.28
n41	25	30	2592.99	CP	16QAM	Outer_Full	21.74
n41	25	30	2592.99	CP	64QAM	Inner_Full	22.24
n41	25	30	2592.99	CP	64QAM	Edge_1RB_Left	21.91
n41	25	30	2592.99	CP	64QAM	Edge_1RB_Right	22.04
n41	25	30	2592.99	CP	64QAM	Outer_Full	21.33
n41	25	30	2592.99	CP	256QAM	Inner_Full	19.21
n41	25	30	2592.99	CP	256QAM	Edge_1RB_Left	19.03
n41	25	30	2592.99	CP	256QAM	Edge_1RB_Right	19.16
n41	25	30	2592.99	CP	256QAM	Outer_Full	19.27
n41	25	30	2677.5	DFT	QPSK	Inner_Full	25.79
n41	25	30	2677.5	DFT	QPSK	Edge_1RB_Left	22.05
n41	25	30	2677.5	DFT	QPSK	Edge_1RB_Right	22.27
n41	25	30	2677.5	DFT	QPSK	Outer_Full	23.65
n41	25	30	2677.5	DFT	16QAM	Inner_Full	24.64
n41	25	30	2677.5	DFT	16QAM	Edge_1RB_Left	21.80
n41	25	30	2677.5	DFT	16QAM	Edge_1RB_Right	22.06
n41	25	30	2677.5	DFT	16QAM	Outer_Full	22.72
n41	25	30	2677.5	DFT	64QAM	Inner_Full	23.16
n41	25	30	2677.5	DFT	64QAM	Edge_1RB_Left	21.75
n41	25	30	2677.5	DFT	64QAM	Edge_1RB_Right	22.01
n41	25	30	2677.5	DFT	64QAM	Outer_Full	23.20
n41	25	30	2677.5	DFT	256QAM	Inner_Full	21.13
n41	25	30	2677.5	DFT	256QAM	Edge_1RB_Left	20.93
n41	25	30	2677.5	DFT	256QAM	Edge_1RB_Right	21.14



BAND	BW(MHz)	SCS(kHz)	FREQ(MHz)	OFDM	MODULATION	RB LOCATION	POWER(dBm)
n41	25	30	2677.5	DFT	256QAM	Outer_Full	21.19
n41	25	30	2677.5	CP	QPSK	Inner_Full	24.33
n41	25	30	2677.5	CP	QPSK	Edge_1RB_Left	22.11
n41	25	30	2677.5	CP	QPSK	Edge_1RB_Right	22.36
n41	25	30	2677.5	CP	QPSK	Outer_Full	21.71
n41	25	30	2677.5	CP	16QAM	Inner_Full	23.71
n41	25	30	2677.5	CP	16QAM	Edge_1RB_Left	21.91
n41	25	30	2677.5	CP	16QAM	Edge_1RB_Right	22.18
n41	25	30	2677.5	CP	16QAM	Outer_Full	21.64
n41	25	30	2677.5	CP	64QAM	Inner_Full	22.25
n41	25	30	2677.5	CP	64QAM	Edge_1RB_Left	21.89
n41	25	30	2677.5	CP	64QAM	Edge_1RB_Right	22.06
n41	25	30	2677.5	CP	64QAM	Outer_Full	21.21
n41	25	30	2677.5	CP	256QAM	Inner_Full	19.16
n41	25	30	2677.5	CP	256QAM	Edge_1RB_Left	18.82
n41	25	30	2677.5	CP	256QAM	Edge_1RB_Right	19.10
n41	25	30	2677.5	CP	256QAM	Outer_Full	19.14
n41	30	30	2511	DFT	QPSK	Inner_Full	25.82
n41	30	30	2511	DFT	QPSK	Edge_1RB_Left	22.20
n41	30	30	2511	DFT	QPSK	Edge_1RB_Right	22.13
n41	30	30	2511	DFT	QPSK	Outer_Full	23.81
n41	30	30	2511	DFT	16QAM	Inner_Full	24.71
n41	30	30	2511	DFT	16QAM	Edge_1RB_Left	21.99
n41	30	30	2511	DFT	16QAM	Edge_1RB_Right	21.94
n41	30	30	2511	DFT	16QAM	Outer_Full	22.68
n41	30	30	2511	DFT	64QAM	Inner_Full	23.32
n41	30	30	2511	DFT	64QAM	Edge_1RB_Left	21.83
n41	30	30	2511	DFT	64QAM	Edge_1RB_Right	21.85
n41	30	30	2511	DFT	64QAM	Outer_Full	23.17
n41	30	30	2511	DFT	256QAM	Inner_Full	21.27
n41	30	30	2511	DFT	256QAM	Edge_1RB_Left	21.05
n41	30	30	2511	DFT	256QAM	Edge_1RB_Right	21.06
n41	30	30	2511	DFT	256QAM	Outer_Full	21.27
n41	30	30	2511	CP	QPSK	Inner_Full	24.31
n41	30	30	2511	CP	QPSK	Edge_1RB_Left	22.22
n41	30	30	2511	CP	QPSK	Edge_1RB_Right	22.23
n41	30	30	2511	CP	QPSK	Outer_Full	21.72
n41	30	30	2511	CP	16QAM	Inner_Full	23.88
n41	30	30	2511	CP	16QAM	Edge_1RB_Left	22.01
n41	30	30	2511	CP	16QAM	Edge_1RB_Right	22.08
n41	30	30	2511	CP	16QAM	Outer_Full	21.72



BAND	BW(MHz)	SCS(kHz)	FREQ(MHz)	OFDM	MODULATION	RB LOCATION	POWER(dBm)
n41	30	30	2511	CP	64QAM	Inner_Full	22.31
n41	30	30	2511	CP	64QAM	Edge_1RB_Left	21.90
n41	30	30	2511	CP	64QAM	Edge_1RB_Right	21.98
n41	30	30	2511	CP	64QAM	Outer_Full	21.14
n41	30	30	2511	CP	256QAM	Inner_Full	19.32
n41	30	30	2511	CP	256QAM	Edge_1RB_Left	18.89
n41	30	30	2511	CP	256QAM	Edge_1RB_Right	18.99
n41	30	30	2511	CP	256QAM	Outer_Full	19.30
n41	30	30	2592.99	DFT	QPSK	Inner_Full	25.77
n41	30	30	2592.99	DFT	QPSK	Edge_1RB_Left	22.06
n41	30	30	2592.99	DFT	QPSK	Edge_1RB_Right	22.46
n41	30	30	2592.99	DFT	QPSK	Outer_Full	23.78
n41	30	30	2592.99	DFT	16QAM	Inner_Full	24.69
n41	30	30	2592.99	DFT	16QAM	Edge_1RB_Left	21.93
n41	30	30	2592.99	DFT	16QAM	Edge_1RB_Right	22.27
n41	30	30	2592.99	DFT	16QAM	Outer_Full	22.87
n41	30	30	2592.99	DFT	64QAM	Inner_Full	23.31
n41	30	30	2592.99	DFT	64QAM	Edge_1RB_Left	21.77
n41	30	30	2592.99	DFT	64QAM	Edge_1RB_Right	22.03
n41	30	30	2592.99	DFT	64QAM	Outer_Full	23.30
n41	30	30	2592.99	DFT	256QAM	Inner_Full	21.18
n41	30	30	2592.99	DFT	256QAM	Edge_1RB_Left	21.00
n41	30	30	2592.99	DFT	256QAM	Edge_1RB_Right	21.32
n41	30	30	2592.99	DFT	256QAM	Outer_Full	21.27
n41	30	30	2592.99	CP	QPSK	Inner_Full	24.24
n41	30	30	2592.99	CP	QPSK	Edge_1RB_Left	22.25
n41	30	30	2592.99	CP	QPSK	Edge_1RB_Right	22.39
n41	30	30	2592.99	CP	QPSK	Outer_Full	21.80
n41	30	30	2592.99	CP	16QAM	Inner_Full	23.84
n41	30	30	2592.99	CP	16QAM	Edge_1RB_Left	22.05
n41	30	30	2592.99	CP	16QAM	Edge_1RB_Right	22.24
n41	30	30	2592.99	CP	16QAM	Outer_Full	21.79
n41	30	30	2592.99	CP	64QAM	Inner_Full	22.27
n41	30	30	2592.99	CP	64QAM	Edge_1RB_Left	21.87
n41	30	30	2592.99	CP	64QAM	Edge_1RB_Right	22.08
n41	30	30	2592.99	CP	64QAM	Outer_Full	21.31
n41	30	30	2592.99	CP	256QAM	Inner_Full	19.25
n41	30	30	2592.99	CP	256QAM	Edge_1RB_Left	18.90
n41	30	30	2592.99	CP	256QAM	Edge_1RB_Right	19.17
n41	30	30	2592.99	CP	256QAM	Outer_Full	19.30
n41	30	30	2674.98	DFT	QPSK	Inner_Full	25.77



BAND	BW(MHz)	SCS(kHz)	FREQ(MHz)	OFDM	MODULATION	RB LOCATION	POWER(dBm)
n41	30	30	2674.98	DFT	QPSK	Edge_1RB_Left	21.95
n41	30	30	2674.98	DFT	QPSK	Edge_1RB_Right	22.28
n41	30	30	2674.98	DFT	QPSK	Outer_Full	23.68
n41	30	30	2674.98	DFT	16QAM	Inner_Full	24.64
n41	30	30	2674.98	DFT	16QAM	Edge_1RB_Left	21.79
n41	30	30	2674.98	DFT	16QAM	Edge_1RB_Right	21.95
n41	30	30	2674.98	DFT	16QAM	Outer_Full	22.69
n41	30	30	2674.98	DFT	64QAM	Inner_Full	23.18
n41	30	30	2674.98	DFT	64QAM	Edge_1RB_Left	21.69
n41	30	30	2674.98	DFT	64QAM	Edge_1RB_Right	21.88
n41	30	30	2674.98	DFT	64QAM	Outer_Full	23.20
n41	30	30	2674.98	DFT	256QAM	Inner_Full	21.24
n41	30	30	2674.98	DFT	256QAM	Edge_1RB_Left	20.88
n41	30	30	2674.98	DFT	256QAM	Edge_1RB_Right	21.17
n41	30	30	2674.98	DFT	256QAM	Outer_Full	21.18
n41	30	30	2674.98	CP	QPSK	Inner_Full	24.31
n41	30	30	2674.98	CP	QPSK	Edge_1RB_Left	22.04
n41	30	30	2674.98	CP	QPSK	Edge_1RB_Right	22.37
n41	30	30	2674.98	CP	QPSK	Outer_Full	21.74
n41	30	30	2674.98	CP	16QAM	Inner_Full	23.72
n41	30	30	2674.98	CP	16QAM	Edge_1RB_Left	21.93
n41	30	30	2674.98	CP	16QAM	Edge_1RB_Right	22.10
n41	30	30	2674.98	CP	16QAM	Outer_Full	21.69
n41	30	30	2674.98	CP	64QAM	Inner_Full	22.19
n41	30	30	2674.98	CP	64QAM	Edge_1RB_Left	21.81
n41	30	30	2674.98	CP	64QAM	Edge_1RB_Right	21.93
n41	30	30	2674.98	CP	64QAM	Outer_Full	21.17
n41	30	30	2674.98	CP	256QAM	Inner_Full	19.20
n41	30	30	2674.98	CP	256QAM	Edge_1RB_Left	18.81
n41	30	30	2674.98	CP	256QAM	Edge_1RB_Right	19.06
n41	30	30	2674.98	CP	256QAM	Outer_Full	19.17
n41	35	30	2513.52	DFT	QPSK	Inner_Full	25.75
n41	35	30	2513.52	DFT	QPSK	Edge_1RB_Left	22.12
n41	35	30	2513.52	DFT	QPSK	Edge_1RB_Right	22.08
n41	35	30	2513.52	DFT	QPSK	Outer_Full	23.67
n41	35	30	2513.52	DFT	16QAM	Inner_Full	24.60
n41	35	30	2513.52	DFT	16QAM	Edge_1RB_Left	21.75
n41	35	30	2513.52	DFT	16QAM	Edge_1RB_Right	21.84
n41	35	30	2513.52	DFT	16QAM	Outer_Full	22.54
n41	35	30	2513.52	DFT	64QAM	Inner_Full	23.17
n41	35	30	2513.52	DFT	64QAM	Edge_1RB_Left	21.77



BAND	BW(MHz)	SCS(kHz)	FREQ(MHz)	OFDM	MODULATION	RB LOCATION	POWER(dBm)
n41	35	30	2513.52	DFT	64QAM	Edge_1RB_Right	21.67
n41	35	30	2513.52	DFT	64QAM	Outer_Full	23.36
n41	35	30	2513.52	DFT	256QAM	Inner_Full	21.20
n41	35	30	2513.52	DFT	256QAM	Edge_1RB_Left	20.96
n41	35	30	2513.52	DFT	256QAM	Edge_1RB_Right	20.92
n41	35	30	2513.52	DFT	256QAM	Outer_Full	21.16
n41	35	30	2513.52	CP	QPSK	Inner_Full	24.16
n41	35	30	2513.52	CP	QPSK	Edge_1RB_Left	21.99
n41	35	30	2513.52	CP	QPSK	Edge_1RB_Right	22.10
n41	35	30	2513.52	CP	QPSK	Outer_Full	21.59
n41	35	30	2513.52	CP	16QAM	Inner_Full	23.85
n41	35	30	2513.52	CP	16QAM	Edge_1RB_Left	21.89
n41	35	30	2513.52	CP	16QAM	Edge_1RB_Right	22.15
n41	35	30	2513.52	CP	16QAM	Outer_Full	21.76
n41	35	30	2513.52	CP	64QAM	Inner_Full	22.32
n41	35	30	2513.52	CP	64QAM	Edge_1RB_Left	21.81
n41	35	30	2513.52	CP	64QAM	Edge_1RB_Right	21.83
n41	35	30	2513.52	CP	64QAM	Outer_Full	21.05
n41	35	30	2513.52	CP	256QAM	Inner_Full	19.26
n41	35	30	2513.52	CP	256QAM	Edge_1RB_Left	18.77
n41	35	30	2513.52	CP	256QAM	Edge_1RB_Right	19.05
n41	35	30	2513.52	CP	256QAM	Outer_Full	19.13
n41	35	30	2592.99	DFT	QPSK	Inner_Full	25.65
n41	35	30	2592.99	DFT	QPSK	Edge_1RB_Left	22.06
n41	35	30	2592.99	DFT	QPSK	Edge_1RB_Right	21.98
n41	35	30	2592.99	DFT	QPSK	Outer_Full	23.56
n41	35	30	2592.99	DFT	16QAM	Inner_Full	24.64
n41	35	30	2592.99	DFT	16QAM	Edge_1RB_Left	21.59
n41	35	30	2592.99	DFT	16QAM	Edge_1RB_Right	21.88
n41	35	30	2592.99	DFT	16QAM	Outer_Full	22.59
n41	35	30	2592.99	DFT	64QAM	Inner_Full	23.17
n41	35	30	2592.99	DFT	64QAM	Edge_1RB_Left	21.69
n41	35	30	2592.99	DFT	64QAM	Edge_1RB_Right	21.77
n41	35	30	2592.99	DFT	64QAM	Outer_Full	23.17
n41	35	30	2592.99	DFT	256QAM	Inner_Full	20.99
n41	35	30	2592.99	DFT	256QAM	Edge_1RB_Left	20.80
n41	35	30	2592.99	DFT	256QAM	Edge_1RB_Right	20.89
n41	35	30	2592.99	DFT	256QAM	Outer_Full	20.89
n41	35	30	2592.99	CP	QPSK	Inner_Full	24.24
n41	35	30	2592.99	CP	QPSK	Edge_1RB_Left	22.02
n41	35	30	2592.99	CP	QPSK	Edge_1RB_Right	22.17



BAND	BW(MHz)	SCS(kHz)	FREQ(MHz)	OFDM	MODULATION	RB LOCATION	POWER(dBm)
n41	35	30	2592.99	CP	QPSK	Outer_Full	21.75
n41	35	30	2592.99	CP	16QAM	Inner_Full	23.88
n41	35	30	2592.99	CP	16QAM	Edge_1RB_Left	21.95
n41	35	30	2592.99	CP	16QAM	Edge_1RB_Right	22.08
n41	35	30	2592.99	CP	16QAM	Outer_Full	21.50
n41	35	30	2592.99	CP	64QAM	Inner_Full	22.02
n41	35	30	2592.99	CP	64QAM	Edge_1RB_Left	21.57
n41	35	30	2592.99	CP	64QAM	Edge_1RB_Right	21.87
n41	35	30	2592.99	CP	64QAM	Outer_Full	21.15
n41	35	30	2592.99	CP	256QAM	Inner_Full	19.10
n41	35	30	2592.99	CP	256QAM	Edge_1RB_Left	18.68
n41	35	30	2592.99	CP	256QAM	Edge_1RB_Right	18.95
n41	35	30	2592.99	CP	256QAM	Outer_Full	19.08
n41	35	30	2672.49	DFT	QPSK	Inner_Full	25.69
n41	35	30	2672.49	DFT	QPSK	Edge_1RB_Left	21.81
n41	35	30	2672.49	DFT	QPSK	Edge_1RB_Right	22.02
n41	35	30	2672.49	DFT	QPSK	Outer_Full	23.66
n41	35	30	2672.49	DFT	16QAM	Inner_Full	24.64
n41	35	30	2672.49	DFT	16QAM	Edge_1RB_Left	21.67
n41	35	30	2672.49	DFT	16QAM	Edge_1RB_Right	21.96
n41	35	30	2672.49	DFT	16QAM	Outer_Full	22.59
n41	35	30	2672.49	DFT	64QAM	Inner_Full	23.22
n41	35	30	2672.49	DFT	64QAM	Edge_1RB_Left	21.60
n41	35	30	2672.49	DFT	64QAM	Edge_1RB_Right	21.93
n41	35	30	2672.49	DFT	64QAM	Outer_Full	22.98
n41	35	30	2672.49	DFT	256QAM	Inner_Full	21.13
n41	35	30	2672.49	DFT	256QAM	Edge_1RB_Left	20.82
n41	35	30	2672.49	DFT	256QAM	Edge_1RB_Right	21.05
n41	35	30	2672.49	DFT	256QAM	Outer_Full	21.11
n41	35	30	2672.49	CP	QPSK	Inner_Full	24.20
n41	35	30	2672.49	CP	QPSK	Edge_1RB_Left	22.10
n41	35	30	2672.49	CP	QPSK	Edge_1RB_Right	22.18
n41	35	30	2672.49	CP	QPSK	Outer_Full	21.76
n41	35	30	2672.49	CP	16QAM	Inner_Full	23.93
n41	35	30	2672.49	CP	16QAM	Edge_1RB_Left	21.65
n41	35	30	2672.49	CP	16QAM	Edge_1RB_Right	21.92
n41	35	30	2672.49	CP	16QAM	Outer_Full	21.68
n41	35	30	2672.49	CP	64QAM	Inner_Full	22.10
n41	35	30	2672.49	CP	64QAM	Edge_1RB_Left	21.71
n41	35	30	2672.49	CP	64QAM	Edge_1RB_Right	21.86
n41	35	30	2672.49	CP	64QAM	Outer_Full	21.28



BAND	BW(MHz)	SCS(kHz)	FREQ(MHz)	OFDM	MODULATION	RB LOCATION	POWER(dBm)
n41	35	30	2672.49	CP	256QAM	Inner_Full	19.08
n41	35	30	2672.49	CP	256QAM	Edge_1RB_Left	18.68
n41	35	30	2672.49	CP	256QAM	Edge_1RB_Right	18.87
n41	35	30	2672.49	CP	256QAM	Outer_Full	19.28
n41	40	30	2516.01	DFT	QPSK	Inner_Full	25.89
n41	40	30	2516.01	DFT	QPSK	Edge_1RB_Left	22.07
n41	40	30	2516.01	DFT	QPSK	Edge_1RB_Right	22.09
n41	40	30	2516.01	DFT	QPSK	Outer_Full	23.83
n41	40	30	2516.01	DFT	16QAM	Inner_Full	24.77
n41	40	30	2516.01	DFT	16QAM	Edge_1RB_Left	21.77
n41	40	30	2516.01	DFT	16QAM	Edge_1RB_Right	21.92
n41	40	30	2516.01	DFT	16QAM	Outer_Full	22.81
n41	40	30	2516.01	DFT	64QAM	Inner_Full	23.24
n41	40	30	2516.01	DFT	64QAM	Edge_1RB_Left	21.74
n41	40	30	2516.01	DFT	64QAM	Edge_1RB_Right	21.81
n41	40	30	2516.01	DFT	64QAM	Outer_Full	23.29
n41	40	30	2516.01	DFT	256QAM	Inner_Full	21.18
n41	40	30	2516.01	DFT	256QAM	Edge_1RB_Left	20.86
n41	40	30	2516.01	DFT	256QAM	Edge_1RB_Right	21.00
n41	40	30	2516.01	DFT	256QAM	Outer_Full	21.30
n41	40	30	2516.01	CP	QPSK	Inner_Full	24.31
n41	40	30	2516.01	CP	QPSK	Edge_1RB_Left	22.03
n41	40	30	2516.01	CP	QPSK	Edge_1RB_Right	22.12
n41	40	30	2516.01	CP	QPSK	Outer_Full	21.81
n41	40	30	2516.01	CP	16QAM	Inner_Full	23.81
n41	40	30	2516.01	CP	16QAM	Edge_1RB_Left	21.94
n41	40	30	2516.01	CP	16QAM	Edge_1RB_Right	22.02
n41	40	30	2516.01	CP	16QAM	Outer_Full	21.68
n41	40	30	2516.01	CP	64QAM	Inner_Full	22.29
n41	40	30	2516.01	CP	64QAM	Edge_1RB_Left	21.82
n41	40	30	2516.01	CP	64QAM	Edge_1RB_Right	21.94
n41	40	30	2516.01	CP	64QAM	Outer_Full	21.23
n41	40	30	2516.01	CP	256QAM	Inner_Full	19.28
n41	40	30	2516.01	CP	256QAM	Edge_1RB_Left	18.76
n41	40	30	2516.01	CP	256QAM	Edge_1RB_Right	18.92
n41	40	30	2516.01	CP	256QAM	Outer_Full	19.22
n41	40	30	2592.99	DFT	QPSK	Inner_Full	25.80
n41	40	30	2592.99	DFT	QPSK	Edge_1RB_Left	22.00
n41	40	30	2592.99	DFT	QPSK	Edge_1RB_Right	22.43
n41	40	30	2592.99	DFT	QPSK	Outer_Full	23.92
n41	40	30	2592.99	DFT	16QAM	Inner_Full	24.74



BAND	BW(MHz)	SCS(kHz)	FREQ(MHz)	OFDM	MODULATION	RB LOCATION	POWER(dBm)
n41	40	30	2592.99	DFT	16QAM	Edge_1RB_Left	21.81
n41	40	30	2592.99	DFT	16QAM	Edge_1RB_Right	22.25
n41	40	30	2592.99	DFT	16QAM	Outer_Full	22.80
n41	40	30	2592.99	DFT	64QAM	Inner_Full	23.29
n41	40	30	2592.99	DFT	64QAM	Edge_1RB_Left	21.72
n41	40	30	2592.99	DFT	64QAM	Edge_1RB_Right	22.03
n41	40	30	2592.99	DFT	64QAM	Outer_Full	23.33
n41	40	30	2592.99	DFT	256QAM	Inner_Full	21.19
n41	40	30	2592.99	DFT	256QAM	Edge_1RB_Left	20.85
n41	40	30	2592.99	DFT	256QAM	Edge_1RB_Right	21.31
n41	40	30	2592.99	DFT	256QAM	Outer_Full	21.30
n41	40	30	2592.99	CP	QPSK	Inner_Full	24.32
n41	40	30	2592.99	CP	QPSK	Edge_1RB_Left	22.04
n41	40	30	2592.99	CP	QPSK	Edge_1RB_Right	22.40
n41	40	30	2592.99	CP	QPSK	Outer_Full	21.82
n41	40	30	2592.99	CP	16QAM	Inner_Full	23.84
n41	40	30	2592.99	CP	16QAM	Edge_1RB_Left	21.94
n41	40	30	2592.99	CP	16QAM	Edge_1RB_Right	22.36
n41	40	30	2592.99	CP	16QAM	Outer_Full	21.77
n41	40	30	2592.99	CP	64QAM	Inner_Full	22.31
n41	40	30	2592.99	CP	64QAM	Edge_1RB_Left	21.74
n41	40	30	2592.99	CP	64QAM	Edge_1RB_Right	22.23
n41	40	30	2592.99	CP	64QAM	Outer_Full	21.35
n41	40	30	2592.99	CP	256QAM	Inner_Full	19.28
n41	40	30	2592.99	CP	256QAM	Edge_1RB_Left	18.83
n41	40	30	2592.99	CP	256QAM	Edge_1RB_Right	19.25
n41	40	30	2592.99	CP	256QAM	Outer_Full	19.32
n41	40	30	2670	DFT	QPSK	Inner_Full	25.85
n41	40	30	2670	DFT	QPSK	Edge_1RB_Left	21.99
n41	40	30	2670	DFT	QPSK	Edge_1RB_Right	22.33
n41	40	30	2670	DFT	QPSK	Outer_Full	23.85
n41	40	30	2670	DFT	16QAM	Inner_Full	24.67
n41	40	30	2670	DFT	16QAM	Edge_1RB_Left	21.85
n41	40	30	2670	DFT	16QAM	Edge_1RB_Right	22.04
n41	40	30	2670	DFT	16QAM	Outer_Full	22.71
n41	40	30	2670	DFT	64QAM	Inner_Full	23.25
n41	40	30	2670	DFT	64QAM	Edge_1RB_Left	21.70
n41	40	30	2670	DFT	64QAM	Edge_1RB_Right	21.93
n41	40	30	2670	DFT	64QAM	Outer_Full	23.29
n41	40	30	2670	DFT	256QAM	Inner_Full	21.17
n41	40	30	2670	DFT	256QAM	Edge_1RB_Left	20.83



BAND	BW(MHz)	SCS(kHz)	FREQ(MHz)	OFDM	MODULATION	RB LOCATION	POWER(dBm)
n41	40	30	2670	DFT	256QAM	Edge_1RB_Right	21.21
n41	40	30	2670	DFT	256QAM	Outer_Full	21.28
n41	40	30	2670	CP	QPSK	Inner_Full	24.31
n41	40	30	2670	CP	QPSK	Edge_1RB_Left	21.97
n41	40	30	2670	CP	QPSK	Edge_1RB_Right	22.39
n41	40	30	2670	CP	QPSK	Outer_Full	21.78
n41	40	30	2670	CP	16QAM	Inner_Full	23.83
n41	40	30	2670	CP	16QAM	Edge_1RB_Left	21.92
n41	40	30	2670	CP	16QAM	Edge_1RB_Right	22.12
n41	40	30	2670	CP	16QAM	Outer_Full	21.75
n41	40	30	2670	CP	64QAM	Inner_Full	22.31
n41	40	30	2670	CP	64QAM	Edge_1RB_Left	21.73
n41	40	30	2670	CP	64QAM	Edge_1RB_Right	22.00
n41	40	30	2670	CP	64QAM	Outer_Full	21.24
n41	40	30	2670	CP	256QAM	Inner_Full	19.30
n41	40	30	2670	CP	256QAM	Edge_1RB_Left	18.77
n41	40	30	2670	CP	256QAM	Edge_1RB_Right	19.12
n41	40	30	2670	CP	256QAM	Outer_Full	19.24
n41	45	30	2518.5	DFT	QPSK	Inner_Full	25.81
n41	45	30	2518.5	DFT	QPSK	Edge_1RB_Left	21.98
n41	45	30	2518.5	DFT	QPSK	Edge_1RB_Right	22.03
n41	45	30	2518.5	DFT	QPSK	Outer_Full	23.72
n41	45	30	2518.5	DFT	16QAM	Inner_Full	24.54
n41	45	30	2518.5	DFT	16QAM	Edge_1RB_Left	21.76
n41	45	30	2518.5	DFT	16QAM	Edge_1RB_Right	21.84
n41	45	30	2518.5	DFT	16QAM	Outer_Full	22.51
n41	45	30	2518.5	DFT	64QAM	Inner_Full	23.40
n41	45	30	2518.5	DFT	64QAM	Edge_1RB_Left	21.70
n41	45	30	2518.5	DFT	64QAM	Edge_1RB_Right	21.80
n41	45	30	2518.5	DFT	64QAM	Outer_Full	23.32
n41	45	30	2518.5	DFT	256QAM	Inner_Full	21.17
n41	45	30	2518.5	DFT	256QAM	Edge_1RB_Left	21.00
n41	45	30	2518.5	DFT	256QAM	Edge_1RB_Right	20.91
n41	45	30	2518.5	DFT	256QAM	Outer_Full	21.35
n41	45	30	2518.5	CP	QPSK	Inner_Full	24.13
n41	45	30	2518.5	CP	QPSK	Edge_1RB_Left	22.11
n41	45	30	2518.5	CP	QPSK	Edge_1RB_Right	22.09
n41	45	30	2518.5	CP	QPSK	Outer_Full	21.61
n41	45	30	2518.5	CP	16QAM	Inner_Full	23.82
n41	45	30	2518.5	CP	16QAM	Edge_1RB_Left	21.79
n41	45	30	2518.5	CP	16QAM	Edge_1RB_Right	21.95



BAND	BW(MHz)	SCS(kHz)	FREQ(MHz)	OFDM	MODULATION	RB LOCATION	POWER(dBm)
n41	45	30	2518.5	CP	16QAM	Outer_Full	21.77
n41	45	30	2518.5	CP	64QAM	Inner_Full	22.20
n41	45	30	2518.5	CP	64QAM	Edge_1RB_Left	21.66
n41	45	30	2518.5	CP	64QAM	Edge_1RB_Right	21.93
n41	45	30	2518.5	CP	64QAM	Outer_Full	21.20
n41	45	30	2518.5	CP	256QAM	Inner_Full	19.09
n41	45	30	2518.5	CP	256QAM	Edge_1RB_Left	18.71
n41	45	30	2518.5	CP	256QAM	Edge_1RB_Right	19.04
n41	45	30	2518.5	CP	256QAM	Outer_Full	19.12
n41	45	30	2592.99	DFT	QPSK	Inner_Full	25.73
n41	45	30	2592.99	DFT	QPSK	Edge_1RB_Left	22.08
n41	45	30	2592.99	DFT	QPSK	Edge_1RB_Right	22.18
n41	45	30	2592.99	DFT	QPSK	Outer_Full	23.55
n41	45	30	2592.99	DFT	16QAM	Inner_Full	24.55
n41	45	30	2592.99	DFT	16QAM	Edge_1RB_Left	21.60
n41	45	30	2592.99	DFT	16QAM	Edge_1RB_Right	21.87
n41	45	30	2592.99	DFT	16QAM	Outer_Full	22.58
n41	45	30	2592.99	DFT	64QAM	Inner_Full	23.27
n41	45	30	2592.99	DFT	64QAM	Edge_1RB_Left	21.53
n41	45	30	2592.99	DFT	64QAM	Edge_1RB_Right	21.94
n41	45	30	2592.99	DFT	64QAM	Outer_Full	22.99
n41	45	30	2592.99	DFT	256QAM	Inner_Full	21.04
n41	45	30	2592.99	DFT	256QAM	Edge_1RB_Left	20.71
n41	45	30	2592.99	DFT	256QAM	Edge_1RB_Right	20.91
n41	45	30	2592.99	DFT	256QAM	Outer_Full	21.07
n41	45	30	2592.99	CP	QPSK	Inner_Full	24.16
n41	45	30	2592.99	CP	QPSK	Edge_1RB_Left	21.96
n41	45	30	2592.99	CP	QPSK	Edge_1RB_Right	22.17
n41	45	30	2592.99	CP	QPSK	Outer_Full	21.66
n41	45	30	2592.99	CP	16QAM	Inner_Full	23.73
n41	45	30	2592.99	CP	16QAM	Edge_1RB_Left	21.95
n41	45	30	2592.99	CP	16QAM	Edge_1RB_Right	22.03
n41	45	30	2592.99	CP	16QAM	Outer_Full	21.59
n41	45	30	2592.99	CP	64QAM	Inner_Full	22.15
n41	45	30	2592.99	CP	64QAM	Edge_1RB_Left	21.54
n41	45	30	2592.99	CP	64QAM	Edge_1RB_Right	21.98
n41	45	30	2592.99	CP	64QAM	Outer_Full	21.20
n41	45	30	2592.99	CP	256QAM	Inner_Full	18.90
n41	45	30	2592.99	CP	256QAM	Edge_1RB_Left	18.72
n41	45	30	2592.99	CP	256QAM	Edge_1RB_Right	19.09
n41	45	30	2592.99	CP	256QAM	Outer_Full	19.10



BAND	BW(MHz)	SCS(kHz)	FREQ(MHz)	OFDM	MODULATION	RB LOCATION	POWER(dBm)
n41	45	30	2667.48	DFT	QPSK	Inner_Full	25.70
n41	45	30	2667.48	DFT	QPSK	Edge_1RB_Left	21.88
n41	45	30	2667.48	DFT	QPSK	Edge_1RB_Right	22.12
n41	45	30	2667.48	DFT	QPSK	Outer_Full	23.76
n41	45	30	2667.48	DFT	16QAM	Inner_Full	24.69
n41	45	30	2667.48	DFT	16QAM	Edge_1RB_Left	21.69
n41	45	30	2667.48	DFT	16QAM	Edge_1RB_Right	21.79
n41	45	30	2667.48	DFT	16QAM	Outer_Full	22.71
n41	45	30	2667.48	DFT	64QAM	Inner_Full	23.06
n41	45	30	2667.48	DFT	64QAM	Edge_1RB_Left	21.56
n41	45	30	2667.48	DFT	64QAM	Edge_1RB_Right	21.88
n41	45	30	2667.48	DFT	64QAM	Outer_Full	23.05
n41	45	30	2667.48	DFT	256QAM	Inner_Full	21.09
n41	45	30	2667.48	DFT	256QAM	Edge_1RB_Left	20.87
n41	45	30	2667.48	DFT	256QAM	Edge_1RB_Right	20.90
n41	45	30	2667.48	DFT	256QAM	Outer_Full	21.24
n41	45	30	2667.48	CP	QPSK	Inner_Full	24.19
n41	45	30	2667.48	CP	QPSK	Edge_1RB_Left	22.03
n41	45	30	2667.48	CP	QPSK	Edge_1RB_Right	22.29
n41	45	30	2667.48	CP	QPSK	Outer_Full	21.60
n41	45	30	2667.48	CP	16QAM	Inner_Full	23.88
n41	45	30	2667.48	CP	16QAM	Edge_1RB_Left	21.73
n41	45	30	2667.48	CP	16QAM	Edge_1RB_Right	22.03
n41	45	30	2667.48	CP	16QAM	Outer_Full	21.68
n41	45	30	2667.48	CP	64QAM	Inner_Full	22.20
n41	45	30	2667.48	CP	64QAM	Edge_1RB_Left	21.59
n41	45	30	2667.48	CP	64QAM	Edge_1RB_Right	21.89
n41	45	30	2667.48	CP	64QAM	Outer_Full	21.11
n41	45	30	2667.48	CP	256QAM	Inner_Full	19.16
n41	45	30	2667.48	CP	256QAM	Edge_1RB_Left	18.57
n41	45	30	2667.48	CP	256QAM	Edge_1RB_Right	18.99
n41	45	30	2667.48	CP	256QAM	Outer_Full	19.27
n41	50	30	2521.02	DFT	QPSK	Inner_Full	26.02
n41	50	30	2521.02	DFT	QPSK	Edge_1RB_Left	22.12
n41	50	30	2521.02	DFT	QPSK	Edge_1RB_Right	22.31
n41	50	30	2521.02	DFT	QPSK	Outer_Full	24.93
n41	50	30	2521.02	DFT	16QAM	Inner_Full	24.94
n41	50	30	2521.02	DFT	16QAM	Edge_1RB_Left	22.00
n41	50	30	2521.02	DFT	16QAM	Edge_1RB_Right	22.17
n41	50	30	2521.02	DFT	16QAM	Outer_Full	23.95
n41	50	30	2521.02	DFT	64QAM	Inner_Full	23.44



BAND	BW(MHz)	SCS(kHz)	FREQ(MHz)	OFDM	MODULATION	RB LOCATION	POWER(dBm)
n41	50	30	2521.02	DFT	64QAM	Edge_1RB_Left	21.87
n41	50	30	2521.02	DFT	64QAM	Edge_1RB_Right	22.00
n41	50	30	2521.02	DFT	64QAM	Outer_Full	23.48
n41	50	30	2521.02	DFT	256QAM	Inner_Full	21.33
n41	50	30	2521.02	DFT	256QAM	Edge_1RB_Left	21.05
n41	50	30	2521.02	DFT	256QAM	Edge_1RB_Right	21.20
n41	50	30	2521.02	DFT	256QAM	Outer_Full	21.39
n41	50	30	2521.02	CP	QPSK	Inner_Full	24.57
n41	50	30	2521.02	CP	QPSK	Edge_1RB_Left	22.15
n41	50	30	2521.02	CP	QPSK	Edge_1RB_Right	22.32
n41	50	30	2521.02	CP	QPSK	Outer_Full	21.87
n41	50	30	2521.02	CP	16QAM	Inner_Full	23.97
n41	50	30	2521.02	CP	16QAM	Edge_1RB_Left	22.14
n41	50	30	2521.02	CP	16QAM	Edge_1RB_Right	22.25
n41	50	30	2521.02	CP	16QAM	Outer_Full	21.88
n41	50	30	2521.02	CP	64QAM	Inner_Full	22.46
n41	50	30	2521.02	CP	64QAM	Edge_1RB_Left	21.93
n41	50	30	2521.02	CP	64QAM	Edge_1RB_Right	22.14
n41	50	30	2521.02	CP	64QAM	Outer_Full	22.41
n41	50	30	2521.02	CP	256QAM	Inner_Full	19.46
n41	50	30	2521.02	CP	256QAM	Edge_1RB_Left	19.03
n41	50	30	2521.02	CP	256QAM	Edge_1RB_Right	19.18
n41	50	30	2521.02	CP	256QAM	Outer_Full	19.40
n41	50	30	2592.99	DFT	QPSK	Inner_Full	25.99
n41	50	30	2592.99	DFT	QPSK	Edge_1RB_Left	22.20
n41	50	30	2592.99	DFT	QPSK	Edge_1RB_Right	22.65
n41	50	30	2592.99	DFT	QPSK	Outer_Full	24.98
n41	50	30	2592.99	DFT	16QAM	Inner_Full	24.97
n41	50	30	2592.99	DFT	16QAM	Edge_1RB_Left	22.03
n41	50	30	2592.99	DFT	16QAM	Edge_1RB_Right	22.49
n41	50	30	2592.99	DFT	16QAM	Outer_Full	24.02
n41	50	30	2592.99	DFT	64QAM	Inner_Full	23.44
n41	50	30	2592.99	DFT	64QAM	Edge_1RB_Left	21.92
n41	50	30	2592.99	DFT	64QAM	Edge_1RB_Right	22.21
n41	50	30	2592.99	DFT	64QAM	Outer_Full	23.49
n41	50	30	2592.99	DFT	256QAM	Inner_Full	21.33
n41	50	30	2592.99	DFT	256QAM	Edge_1RB_Left	21.09
n41	50	30	2592.99	DFT	256QAM	Edge_1RB_Right	21.56
n41	50	30	2592.99	DFT	256QAM	Outer_Full	21.47
n41	50	30	2592.99	CP	QPSK	Inner_Full	24.52
n41	50	30	2592.99	CP	QPSK	Edge_1RB_Left	22.23



BAND	BW(MHz)	SCS(kHz)	FREQ(MHz)	OFDM	MODULATION	RB LOCATION	POWER(dBm)
n41	50	30	2592.99	CP	QPSK	Edge_1RB_Right	22.66
n41	50	30	2592.99	CP	QPSK	Outer_Full	21.90
n41	50	30	2592.99	CP	16QAM	Inner_Full	23.97
n41	50	30	2592.99	CP	16QAM	Edge_1RB_Left	22.12
n41	50	30	2592.99	CP	16QAM	Edge_1RB_Right	22.62
n41	50	30	2592.99	CP	16QAM	Outer_Full	21.90
n41	50	30	2592.99	CP	64QAM	Inner_Full	22.47
n41	50	30	2592.99	CP	64QAM	Edge_1RB_Left	21.94
n41	50	30	2592.99	CP	64QAM	Edge_1RB_Right	22.40
n41	50	30	2592.99	CP	64QAM	Outer_Full	22.45
n41	50	30	2592.99	CP	256QAM	Inner_Full	19.45
n41	50	30	2592.99	CP	256QAM	Edge_1RB_Left	19.05
n41	50	30	2592.99	CP	256QAM	Edge_1RB_Right	19.52
n41	50	30	2592.99	CP	256QAM	Outer_Full	19.50
n41	50	30	2664.99	DFT	QPSK	Inner_Full	25.90
n41	50	30	2664.99	DFT	QPSK	Edge_1RB_Left	22.10
n41	50	30	2664.99	DFT	QPSK	Edge_1RB_Right	22.52
n41	50	30	2664.99	DFT	QPSK	Outer_Full	24.85
n41	50	30	2664.99	DFT	16QAM	Inner_Full	24.91
n41	50	30	2664.99	DFT	16QAM	Edge_1RB_Left	21.96
n41	50	30	2664.99	DFT	16QAM	Edge_1RB_Right	22.30
n41	50	30	2664.99	DFT	16QAM	Outer_Full	23.89
n41	50	30	2664.99	DFT	64QAM	Inner_Full	23.40
n41	50	30	2664.99	DFT	64QAM	Edge_1RB_Left	21.92
n41	50	30	2664.99	DFT	64QAM	Edge_1RB_Right	22.16
n41	50	30	2664.99	DFT	64QAM	Outer_Full	23.42
n41	50	30	2664.99	DFT	256QAM	Inner_Full	21.33
n41	50	30	2664.99	DFT	256QAM	Edge_1RB_Left	21.03
n41	50	30	2664.99	DFT	256QAM	Edge_1RB_Right	21.44
n41	50	30	2664.99	DFT	256QAM	Outer_Full	21.38
n41	50	30	2664.99	CP	QPSK	Inner_Full	24.47
n41	50	30	2664.99	CP	QPSK	Edge_1RB_Left	22.19
n41	50	30	2664.99	CP	QPSK	Edge_1RB_Right	22.50
n41	50	30	2664.99	CP	QPSK	Outer_Full	21.89
n41	50	30	2664.99	CP	16QAM	Inner_Full	23.90
n41	50	30	2664.99	CP	16QAM	Edge_1RB_Left	22.13
n41	50	30	2664.99	CP	16QAM	Edge_1RB_Right	22.39
n41	50	30	2664.99	CP	16QAM	Outer_Full	21.85
n41	50	30	2664.99	CP	64QAM	Inner_Full	22.44
n41	50	30	2664.99	CP	64QAM	Edge_1RB_Left	22.02
n41	50	30	2664.99	CP	64QAM	Edge_1RB_Right	22.26



BAND	BW(MHz)	SCS(kHz)	FREQ(MHz)	OFDM	MODULATION	RB LOCATION	POWER(dBm)
n41	50	30	2664.99	CP	64QAM	Outer_Full	22.40
n41	50	30	2664.99	CP	256QAM	Inner_Full	19.44
n41	50	30	2664.99	CP	256QAM	Edge_1RB_Left	19.01
n41	50	30	2664.99	CP	256QAM	Edge_1RB_Right	19.30
n41	50	30	2664.99	CP	256QAM	Outer_Full	19.40
n41	60	30	2526	DFT	QPSK	Inner_Full	25.79
n41	60	30	2526	DFT	QPSK	Edge_1RB_Left	22.04
n41	60	30	2526	DFT	QPSK	Edge_1RB_Right	22.16
n41	60	30	2526	DFT	QPSK	Outer_Full	24.87
n41	60	30	2526	DFT	16QAM	Inner_Full	24.68
n41	60	30	2526	DFT	16QAM	Edge_1RB_Left	21.86
n41	60	30	2526	DFT	16QAM	Edge_1RB_Right	21.89
n41	60	30	2526	DFT	16QAM	Outer_Full	23.70
n41	60	30	2526	DFT	64QAM	Inner_Full	23.23
n41	60	30	2526	DFT	64QAM	Edge_1RB_Left	21.76
n41	60	30	2526	DFT	64QAM	Edge_1RB_Right	21.82
n41	60	30	2526	DFT	64QAM	Outer_Full	23.23
n41	60	30	2526	DFT	256QAM	Inner_Full	21.13
n41	60	30	2526	DFT	256QAM	Edge_1RB_Left	20.88
n41	60	30	2526	DFT	256QAM	Edge_1RB_Right	21.07
n41	60	30	2526	DFT	256QAM	Outer_Full	21.20
n41	60	30	2526	CP	QPSK	Inner_Full	24.18
n41	60	30	2526	CP	QPSK	Edge_1RB_Left	22.09
n41	60	30	2526	CP	QPSK	Edge_1RB_Right	22.27
n41	60	30	2526	CP	QPSK	Outer_Full	21.71
n41	60	30	2526	CP	16QAM	Inner_Full	23.73
n41	60	30	2526	CP	16QAM	Edge_1RB_Left	21.98
n41	60	30	2526	CP	16QAM	Edge_1RB_Right	22.10
n41	60	30	2526	CP	16QAM	Outer_Full	21.67
n41	60	30	2526	CP	64QAM	Inner_Full	22.22
n41	60	30	2526	CP	64QAM	Edge_1RB_Left	21.94
n41	60	30	2526	CP	64QAM	Edge_1RB_Right	22.00
n41	60	30	2526	CP	64QAM	Outer_Full	22.20
n41	60	30	2526	CP	256QAM	Inner_Full	19.22
n41	60	30	2526	CP	256QAM	Edge_1RB_Left	18.85
n41	60	30	2526	CP	256QAM	Edge_1RB_Right	19.00
n41	60	30	2526	CP	256QAM	Outer_Full	19.23
n41	60	30	2592.99	DFT	QPSK	Inner_Full	25.76
n41	60	30	2592.99	DFT	QPSK	Edge_1RB_Left	22.12
n41	60	30	2592.99	DFT	QPSK	Edge_1RB_Right	22.51
n41	60	30	2592.99	DFT	QPSK	Outer_Full	24.95



BAND	BW(MHz)	SCS(kHz)	FREQ(MHz)	OFDM	MODULATION	RB LOCATION	POWER(dBm)
n41	60	30	2592.99	DFT	16QAM	Inner_Full	24.72
n41	60	30	2592.99	DFT	16QAM	Edge_1RB_Left	22.01
n41	60	30	2592.99	DFT	16QAM	Edge_1RB_Right	22.19
n41	60	30	2592.99	DFT	16QAM	Outer_Full	23.79
n41	60	30	2592.99	DFT	64QAM	Inner_Full	23.25
n41	60	30	2592.99	DFT	64QAM	Edge_1RB_Left	21.75
n41	60	30	2592.99	DFT	64QAM	Edge_1RB_Right	22.11
n41	60	30	2592.99	DFT	64QAM	Outer_Full	23.30
n41	60	30	2592.99	DFT	256QAM	Inner_Full	21.16
n41	60	30	2592.99	DFT	256QAM	Edge_1RB_Left	21.04
n41	60	30	2592.99	DFT	256QAM	Edge_1RB_Right	21.26
n41	60	30	2592.99	DFT	256QAM	Outer_Full	21.27
n41	60	30	2592.99	CP	QPSK	Inner_Full	24.27
n41	60	30	2592.99	CP	QPSK	Edge_1RB_Left	22.23
n41	60	30	2592.99	CP	QPSK	Edge_1RB_Right	22.55
n41	60	30	2592.99	CP	QPSK	Outer_Full	21.74
n41	60	30	2592.99	CP	16QAM	Inner_Full	23.82
n41	60	30	2592.99	CP	16QAM	Edge_1RB_Left	22.04
n41	60	30	2592.99	CP	16QAM	Edge_1RB_Right	22.46
n41	60	30	2592.99	CP	16QAM	Outer_Full	21.65
n41	60	30	2592.99	CP	64QAM	Inner_Full	22.24
n41	60	30	2592.99	CP	64QAM	Edge_1RB_Left	21.97
n41	60	30	2592.99	CP	64QAM	Edge_1RB_Right	22.24
n41	60	30	2592.99	CP	64QAM	Outer_Full	22.15
n41	60	30	2592.99	CP	256QAM	Inner_Full	19.15
n41	60	30	2592.99	CP	256QAM	Edge_1RB_Left	18.99
n41	60	30	2592.99	CP	256QAM	Edge_1RB_Right	19.38
n41	60	30	2592.99	CP	256QAM	Outer_Full	19.32
n41	60	30	2659.98	DFT	QPSK	Inner_Full	25.78
n41	60	30	2659.98	DFT	QPSK	Edge_1RB_Left	22.08
n41	60	30	2659.98	DFT	QPSK	Edge_1RB_Right	22.41
n41	60	30	2659.98	DFT	QPSK	Outer_Full	24.76
n41	60	30	2659.98	DFT	16QAM	Inner_Full	24.69
n41	60	30	2659.98	DFT	16QAM	Edge_1RB_Left	21.95
n41	60	30	2659.98	DFT	16QAM	Edge_1RB_Right	22.26
n41	60	30	2659.98	DFT	16QAM	Outer_Full	23.71
n41	60	30	2659.98	DFT	64QAM	Inner_Full	23.23
n41	60	30	2659.98	DFT	64QAM	Edge_1RB_Left	21.85
n41	60	30	2659.98	DFT	64QAM	Edge_1RB_Right	22.12
n41	60	30	2659.98	DFT	64QAM	Outer_Full	23.27
n41	60	30	2659.98	DFT	256QAM	Inner_Full	21.23



BAND	BW(MHz)	SCS(kHz)	FREQ(MHz)	OFDM	MODULATION	RB LOCATION	POWER(dBm)
n41	60	30	2659.98	DFT	256QAM	Edge_1RB_Left	21.01
n41	60	30	2659.98	DFT	256QAM	Edge_1RB_Right	21.30
n41	60	30	2659.98	DFT	256QAM	Outer_Full	21.20
n41	60	30	2659.98	CP	QPSK	Inner_Full	24.25
n41	60	30	2659.98	CP	QPSK	Edge_1RB_Left	22.14
n41	60	30	2659.98	CP	QPSK	Edge_1RB_Right	22.51
n41	60	30	2659.98	CP	QPSK	Outer_Full	21.68
n41	60	30	2659.98	CP	16QAM	Inner_Full	23.75
n41	60	30	2659.98	CP	16QAM	Edge_1RB_Left	22.08
n41	60	30	2659.98	CP	16QAM	Edge_1RB_Right	22.38
n41	60	30	2659.98	CP	16QAM	Outer_Full	21.73
n41	60	30	2659.98	CP	64QAM	Inner_Full	22.20
n41	60	30	2659.98	CP	64QAM	Edge_1RB_Left	21.86
n41	60	30	2659.98	CP	64QAM	Edge_1RB_Right	22.14
n41	60	30	2659.98	CP	64QAM	Outer_Full	22.22
n41	60	30	2659.98	CP	256QAM	Inner_Full	19.18
n41	60	30	2659.98	CP	256QAM	Edge_1RB_Left	18.95
n41	60	30	2659.98	CP	256QAM	Edge_1RB_Right	19.30
n41	60	30	2659.98	CP	256QAM	Outer_Full	19.24
n41	70	30	2531.01	DFT	QPSK	Inner_Full	25.86
n41	70	30	2531.01	DFT	QPSK	Edge_1RB_Left	22.12
n41	70	30	2531.01	DFT	QPSK	Edge_1RB_Right	22.17
n41	70	30	2531.01	DFT	QPSK	Outer_Full	24.79
n41	70	30	2531.01	DFT	16QAM	Inner_Full	24.75
n41	70	30	2531.01	DFT	16QAM	Edge_1RB_Left	21.86
n41	70	30	2531.01	DFT	16QAM	Edge_1RB_Right	21.93
n41	70	30	2531.01	DFT	16QAM	Outer_Full	23.85
n41	70	30	2531.01	DFT	64QAM	Inner_Full	23.26
n41	70	30	2531.01	DFT	64QAM	Edge_1RB_Left	21.79
n41	70	30	2531.01	DFT	64QAM	Edge_1RB_Right	21.88
n41	70	30	2531.01	DFT	64QAM	Outer_Full	23.29
n41	70	30	2531.01	DFT	256QAM	Inner_Full	21.24
n41	70	30	2531.01	DFT	256QAM	Edge_1RB_Left	21.06
n41	70	30	2531.01	DFT	256QAM	Edge_1RB_Right	21.02
n41	70	30	2531.01	DFT	256QAM	Outer_Full	21.29
n41	70	30	2531.01	CP	QPSK	Inner_Full	24.57
n41	70	30	2531.01	CP	QPSK	Edge_1RB_Left	22.15
n41	70	30	2531.01	CP	QPSK	Edge_1RB_Right	22.24
n41	70	30	2531.01	CP	QPSK	Outer_Full	21.83
n41	70	30	2531.01	CP	16QAM	Inner_Full	23.86
n41	70	30	2531.01	CP	16QAM	Edge_1RB_Left	22.11



BAND	BW(MHz)	SCS(kHz)	FREQ(MHz)	OFDM	MODULATION	RB LOCATION	POWER(dBm)
n41	70	30	2531.01	CP	16QAM	Edge_1RB_Right	22.01
n41	70	30	2531.01	CP	16QAM	Outer_Full	21.71
n41	70	30	2531.01	CP	64QAM	Inner_Full	22.28
n41	70	30	2531.01	CP	64QAM	Edge_1RB_Left	22.00
n41	70	30	2531.01	CP	64QAM	Edge_1RB_Right	21.98
n41	70	30	2531.01	CP	64QAM	Outer_Full	22.21
n41	70	30	2531.01	CP	256QAM	Inner_Full	19.26
n41	70	30	2531.01	CP	256QAM	Edge_1RB_Left	18.98
n41	70	30	2531.01	CP	256QAM	Edge_1RB_Right	18.94
n41	70	30	2531.01	CP	256QAM	Outer_Full	19.27
n41	70	30	2592.99	DFT	QPSK	Inner_Full	25.89
n41	70	30	2592.99	DFT	QPSK	Edge_1RB_Left	22.16
n41	70	30	2592.99	DFT	QPSK	Edge_1RB_Right	22.43
n41	70	30	2592.99	DFT	QPSK	Outer_Full	24.82
n41	70	30	2592.99	DFT	16QAM	Inner_Full	24.77
n41	70	30	2592.99	DFT	16QAM	Edge_1RB_Left	22.01
n41	70	30	2592.99	DFT	16QAM	Edge_1RB_Right	22.25
n41	70	30	2592.99	DFT	16QAM	Outer_Full	23.95
n41	70	30	2592.99	DFT	64QAM	Inner_Full	23.26
n41	70	30	2592.99	DFT	64QAM	Edge_1RB_Left	21.89
n41	70	30	2592.99	DFT	64QAM	Edge_1RB_Right	22.18
n41	70	30	2592.99	DFT	64QAM	Outer_Full	23.35
n41	70	30	2592.99	DFT	256QAM	Inner_Full	21.24
n41	70	30	2592.99	DFT	256QAM	Edge_1RB_Left	21.02
n41	70	30	2592.99	DFT	256QAM	Edge_1RB_Right	21.32
n41	70	30	2592.99	DFT	256QAM	Outer_Full	21.36
n41	70	30	2592.99	CP	QPSK	Inner_Full	24.38
n41	70	30	2592.99	CP	QPSK	Edge_1RB_Left	22.17
n41	70	30	2592.99	CP	QPSK	Edge_1RB_Right	22.43
n41	70	30	2592.99	CP	QPSK	Outer_Full	21.83
n41	70	30	2592.99	CP	16QAM	Inner_Full	23.90
n41	70	30	2592.99	CP	16QAM	Edge_1RB_Left	22.12
n41	70	30	2592.99	CP	16QAM	Edge_1RB_Right	22.40
n41	70	30	2592.99	CP	16QAM	Outer_Full	21.79
n41	70	30	2592.99	CP	64QAM	Inner_Full	22.29
n41	70	30	2592.99	CP	64QAM	Edge_1RB_Left	21.88
n41	70	30	2592.99	CP	64QAM	Edge_1RB_Right	22.33
n41	70	30	2592.99	CP	64QAM	Outer_Full	22.34
n41	70	30	2592.99	CP	256QAM	Inner_Full	19.29
n41	70	30	2592.99	CP	256QAM	Edge_1RB_Left	19.00
n41	70	30	2592.99	CP	256QAM	Edge_1RB_Right	19.27



BAND	BW(MHz)	SCS(kHz)	FREQ(MHz)	OFDM	MODULATION	RB LOCATION	POWER(dBm)
n41	70	30	2592.99	CP	256QAM	Outer_Full	19.29
n41	70	30	2655	DFT	QPSK	Inner_Full	25.94
n41	70	30	2655	DFT	QPSK	Edge_1RB_Left	22.15
n41	70	30	2655	DFT	QPSK	Edge_1RB_Right	22.54
n41	70	30	2655	DFT	QPSK	Outer_Full	24.93
n41	70	30	2655	DFT	16QAM	Inner_Full	24.86
n41	70	30	2655	DFT	16QAM	Edge_1RB_Left	21.96
n41	70	30	2655	DFT	16QAM	Edge_1RB_Right	22.24
n41	70	30	2655	DFT	16QAM	Outer_Full	23.92
n41	70	30	2655	DFT	64QAM	Inner_Full	23.35
n41	70	30	2655	DFT	64QAM	Edge_1RB_Left	21.89
n41	70	30	2655	DFT	64QAM	Edge_1RB_Right	22.23
n41	70	30	2655	DFT	64QAM	Outer_Full	23.32
n41	70	30	2655	DFT	256QAM	Inner_Full	21.31
n41	70	30	2655	DFT	256QAM	Edge_1RB_Left	21.09
n41	70	30	2655	DFT	256QAM	Edge_1RB_Right	21.44
n41	70	30	2655	DFT	256QAM	Outer_Full	21.41
n41	70	30	2655	CP	QPSK	Inner_Full	24.34
n41	70	30	2655	CP	QPSK	Edge_1RB_Left	22.23
n41	70	30	2655	CP	QPSK	Edge_1RB_Right	22.58
n41	70	30	2655	CP	QPSK	Outer_Full	21.92
n41	70	30	2655	CP	16QAM	Inner_Full	23.98
n41	70	30	2655	CP	16QAM	Edge_1RB_Left	22.16
n41	70	30	2655	CP	16QAM	Edge_1RB_Right	22.44
n41	70	30	2655	CP	16QAM	Outer_Full	21.80
n41	70	30	2655	CP	64QAM	Inner_Full	22.41
n41	70	30	2655	CP	64QAM	Edge_1RB_Left	22.00
n41	70	30	2655	CP	64QAM	Edge_1RB_Right	22.22
n41	70	30	2655	CP	64QAM	Outer_Full	22.41
n41	70	30	2655	CP	256QAM	Inner_Full	19.35
n41	70	30	2655	CP	256QAM	Edge_1RB_Left	19.04
n41	70	30	2655	CP	256QAM	Edge_1RB_Right	19.39
n41	70	30	2655	CP	256QAM	Outer_Full	19.31
n41	80	30	2536.02	DFT	QPSK	Inner_Full	25.87
n41	80	30	2536.02	DFT	QPSK	Edge_1RB_Left	22.15
n41	80	30	2536.02	DFT	QPSK	Edge_1RB_Right	22.14
n41	80	30	2536.02	DFT	QPSK	Outer_Full	24.84
n41	80	30	2536.02	DFT	16QAM	Inner_Full	24.81
n41	80	30	2536.02	DFT	16QAM	Edge_1RB_Left	21.94
n41	80	30	2536.02	DFT	16QAM	Edge_1RB_Right	21.96
n41	80	30	2536.02	DFT	16QAM	Outer_Full	23.73



BAND	BW(MHz)	SCS(kHz)	FREQ(MHz)	OFDM	MODULATION	RB LOCATION	POWER(dBm)
n41	80	30	2536.02	DFT	64QAM	Inner_Full	23.28
n41	80	30	2536.02	DFT	64QAM	Edge_1RB_Left	21.74
n41	80	30	2536.02	DFT	64QAM	Edge_1RB_Right	21.86
n41	80	30	2536.02	DFT	64QAM	Outer_Full	23.24
n41	80	30	2536.02	DFT	256QAM	Inner_Full	21.28
n41	80	30	2536.02	DFT	256QAM	Edge_1RB_Left	21.04
n41	80	30	2536.02	DFT	256QAM	Edge_1RB_Right	21.09
n41	80	30	2536.02	DFT	256QAM	Outer_Full	21.21
n41	80	30	2536.02	CP	QPSK	Inner_Full	24.26
n41	80	30	2536.02	CP	QPSK	Edge_1RB_Left	22.13
n41	80	30	2536.02	CP	QPSK	Edge_1RB_Right	22.19
n41	80	30	2536.02	CP	QPSK	Outer_Full	21.89
n41	80	30	2536.02	CP	16QAM	Inner_Full	23.94
n41	80	30	2536.02	CP	16QAM	Edge_1RB_Left	22.07
n41	80	30	2536.02	CP	16QAM	Edge_1RB_Right	22.13
n41	80	30	2536.02	CP	16QAM	Outer_Full	21.87
n41	80	30	2536.02	CP	64QAM	Inner_Full	22.30
n41	80	30	2536.02	CP	64QAM	Edge_1RB_Left	21.82
n41	80	30	2536.02	CP	64QAM	Edge_1RB_Right	21.95
n41	80	30	2536.02	CP	64QAM	Outer_Full	22.27
n41	80	30	2536.02	CP	256QAM	Inner_Full	19.30
n41	80	30	2536.02	CP	256QAM	Edge_1RB_Left	18.94
n41	80	30	2536.02	CP	256QAM	Edge_1RB_Right	19.02
n41	80	30	2536.02	CP	256QAM	Outer_Full	19.23
n41	80	30	2592.99	DFT	QPSK	Inner_Full	25.93
n41	80	30	2592.99	DFT	QPSK	Edge_1RB_Left	22.19
n41	80	30	2592.99	DFT	QPSK	Edge_1RB_Right	22.47
n41	80	30	2592.99	DFT	QPSK	Outer_Full	24.97
n41	80	30	2592.99	DFT	16QAM	Inner_Full	24.86
n41	80	30	2592.99	DFT	16QAM	Edge_1RB_Left	22.05
n41	80	30	2592.99	DFT	16QAM	Edge_1RB_Right	22.32
n41	80	30	2592.99	DFT	16QAM	Outer_Full	23.88
n41	80	30	2592.99	DFT	64QAM	Inner_Full	23.36
n41	80	30	2592.99	DFT	64QAM	Edge_1RB_Left	21.93
n41	80	30	2592.99	DFT	64QAM	Edge_1RB_Right	22.19
n41	80	30	2592.99	DFT	64QAM	Outer_Full	23.35
n41	80	30	2592.99	DFT	256QAM	Inner_Full	21.24
n41	80	30	2592.99	DFT	256QAM	Edge_1RB_Left	21.07
n41	80	30	2592.99	DFT	256QAM	Edge_1RB_Right	21.38
n41	80	30	2592.99	DFT	256QAM	Outer_Full	21.31
n41	80	30	2592.99	CP	QPSK	Inner_Full	24.46



BAND	BW(MHz)	SCS(kHz)	FREQ(MHz)	OFDM	MODULATION	RB LOCATION	POWER(dBm)
n41	80	30	2592.99	CP	QPSK	Edge_1RB_Left	22.21
n41	80	30	2592.99	CP	QPSK	Edge_1RB_Right	22.48
n41	80	30	2592.99	CP	QPSK	Outer_Full	21.95
n41	80	30	2592.99	CP	16QAM	Inner_Full	23.87
n41	80	30	2592.99	CP	16QAM	Edge_1RB_Left	22.11
n41	80	30	2592.99	CP	16QAM	Edge_1RB_Right	22.42
n41	80	30	2592.99	CP	16QAM	Outer_Full	21.94
n41	80	30	2592.99	CP	64QAM	Inner_Full	22.32
n41	80	30	2592.99	CP	64QAM	Edge_1RB_Left	21.99
n41	80	30	2592.99	CP	64QAM	Edge_1RB_Right	22.34
n41	80	30	2592.99	CP	64QAM	Outer_Full	22.35
n41	80	30	2592.99	CP	256QAM	Inner_Full	19.30
n41	80	30	2592.99	CP	256QAM	Edge_1RB_Left	19.03
n41	80	30	2592.99	CP	256QAM	Edge_1RB_Right	19.27
n41	80	30	2592.99	CP	256QAM	Outer_Full	19.38
n41	80	30	2649.99	DFT	QPSK	Inner_Full	25.90
n41	80	30	2649.99	DFT	QPSK	Edge_1RB_Left	22.17
n41	80	30	2649.99	DFT	QPSK	Edge_1RB_Right	22.57
n41	80	30	2649.99	DFT	QPSK	Outer_Full	25.05
n41	80	30	2649.99	DFT	16QAM	Inner_Full	24.79
n41	80	30	2649.99	DFT	16QAM	Edge_1RB_Left	22.04
n41	80	30	2649.99	DFT	16QAM	Edge_1RB_Right	22.40
n41	80	30	2649.99	DFT	16QAM	Outer_Full	23.90
n41	80	30	2649.99	DFT	64QAM	Inner_Full	23.31
n41	80	30	2649.99	DFT	64QAM	Edge_1RB_Left	21.78
n41	80	30	2649.99	DFT	64QAM	Edge_1RB_Right	22.17
n41	80	30	2649.99	DFT	64QAM	Outer_Full	23.36
n41	80	30	2649.99	DFT	256QAM	Inner_Full	21.32
n41	80	30	2649.99	DFT	256QAM	Edge_1RB_Left	21.10
n41	80	30	2649.99	DFT	256QAM	Edge_1RB_Right	21.53
n41	80	30	2649.99	DFT	256QAM	Outer_Full	21.31
n41	80	30	2649.99	CP	QPSK	Inner_Full	24.46
n41	80	30	2649.99	CP	QPSK	Edge_1RB_Left	22.18
n41	80	30	2649.99	CP	QPSK	Edge_1RB_Right	22.73
n41	80	30	2649.99	CP	QPSK	Outer_Full	21.84
n41	80	30	2649.99	CP	16QAM	Inner_Full	23.86
n41	80	30	2649.99	CP	16QAM	Edge_1RB_Left	22.13
n41	80	30	2649.99	CP	16QAM	Edge_1RB_Right	22.46
n41	80	30	2649.99	CP	16QAM	Outer_Full	21.82
n41	80	30	2649.99	CP	64QAM	Inner_Full	22.28
n41	80	30	2649.99	CP	64QAM	Edge_1RB_Left	21.97



BAND	BW(MHz)	SCS(kHz)	FREQ(MHz)	OFDM	MODULATION	RB LOCATION	POWER(dBm)
n41	80	30	2649.99	CP	64QAM	Edge_1RB_Right	22.25
n41	80	30	2649.99	CP	64QAM	Outer_Full	22.32
n41	80	30	2649.99	CP	256QAM	Inner_Full	19.30
n41	80	30	2649.99	CP	256QAM	Edge_1RB_Left	18.97
n41	80	30	2649.99	CP	256QAM	Edge_1RB_Right	19.32
n41	80	30	2649.99	CP	256QAM	Outer_Full	19.36
n41	90	30	2541	DFT	QPSK	Inner_Full	25.88
n41	90	30	2541	DFT	QPSK	Edge_1RB_Left	22.18
n41	90	30	2541	DFT	QPSK	Edge_1RB_Right	22.24
n41	90	30	2541	DFT	QPSK	Outer_Full	25.16
n41	90	30	2541	DFT	16QAM	Inner_Full	24.75
n41	90	30	2541	DFT	16QAM	Edge_1RB_Left	21.91
n41	90	30	2541	DFT	16QAM	Edge_1RB_Right	21.96
n41	90	30	2541	DFT	16QAM	Outer_Full	23.77
n41	90	30	2541	DFT	64QAM	Inner_Full	23.33
n41	90	30	2541	DFT	64QAM	Edge_1RB_Left	21.80
n41	90	30	2541	DFT	64QAM	Edge_1RB_Right	21.83
n41	90	30	2541	DFT	64QAM	Outer_Full	23.30
n41	90	30	2541	DFT	256QAM	Inner_Full	21.30
n41	90	30	2541	DFT	256QAM	Edge_1RB_Left	21.09
n41	90	30	2541	DFT	256QAM	Edge_1RB_Right	21.15
n41	90	30	2541	DFT	256QAM	Outer_Full	21.34
n41	90	30	2541	CP	QPSK	Inner_Full	24.52
n41	90	30	2541	CP	QPSK	Edge_1RB_Left	22.29
n41	90	30	2541	CP	QPSK	Edge_1RB_Right	22.31
n41	90	30	2541	CP	QPSK	Outer_Full	21.78
n41	90	30	2541	CP	16QAM	Inner_Full	23.78
n41	90	30	2541	CP	16QAM	Edge_1RB_Left	22.02
n41	90	30	2541	CP	16QAM	Edge_1RB_Right	22.17
n41	90	30	2541	CP	16QAM	Outer_Full	21.77
n41	90	30	2541	CP	64QAM	Inner_Full	22.33
n41	90	30	2541	CP	64QAM	Edge_1RB_Left	21.91
n41	90	30	2541	CP	64QAM	Edge_1RB_Right	21.97
n41	90	30	2541	CP	64QAM	Outer_Full	22.19
n41	90	30	2541	CP	256QAM	Inner_Full	19.24
n41	90	30	2541	CP	256QAM	Edge_1RB_Left	18.87
n41	90	30	2541	CP	256QAM	Edge_1RB_Right	19.03
n41	90	30	2541	CP	256QAM	Outer_Full	19.22
n41	90	30	2592.99	DFT	QPSK	Inner_Full	25.99
n41	90	30	2592.99	DFT	QPSK	Edge_1RB_Left	22.20
n41	90	30	2592.99	DFT	QPSK	Edge_1RB_Right	22.48



BAND	BW(MHz)	SCS(kHz)	FREQ(MHz)	OFDM	MODULATION	RB LOCATION	POWER(dBm)
n41	90	30	2592.99	DFT	QPSK	Outer_Full	24.95
n41	90	30	2592.99	DFT	16QAM	Inner_Full	24.83
n41	90	30	2592.99	DFT	16QAM	Edge_1RB_Left	21.96
n41	90	30	2592.99	DFT	16QAM	Edge_1RB_Right	22.31
n41	90	30	2592.99	DFT	16QAM	Outer_Full	23.91
n41	90	30	2592.99	DFT	64QAM	Inner_Full	23.36
n41	90	30	2592.99	DFT	64QAM	Edge_1RB_Left	21.82
n41	90	30	2592.99	DFT	64QAM	Edge_1RB_Right	22.26
n41	90	30	2592.99	DFT	64QAM	Outer_Full	23.41
n41	90	30	2592.99	DFT	256QAM	Inner_Full	21.25
n41	90	30	2592.99	DFT	256QAM	Edge_1RB_Left	21.05
n41	90	30	2592.99	DFT	256QAM	Edge_1RB_Right	21.35
n41	90	30	2592.99	DFT	256QAM	Outer_Full	21.35
n41	90	30	2592.99	CP	QPSK	Inner_Full	24.37
n41	90	30	2592.99	CP	QPSK	Edge_1RB_Left	22.25
n41	90	30	2592.99	CP	QPSK	Edge_1RB_Right	22.58
n41	90	30	2592.99	CP	QPSK	Outer_Full	21.81
n41	90	30	2592.99	CP	16QAM	Inner_Full	23.87
n41	90	30	2592.99	CP	16QAM	Edge_1RB_Left	22.09
n41	90	30	2592.99	CP	16QAM	Edge_1RB_Right	22.49
n41	90	30	2592.99	CP	16QAM	Outer_Full	21.85
n41	90	30	2592.99	CP	64QAM	Inner_Full	22.30
n41	90	30	2592.99	CP	64QAM	Edge_1RB_Left	21.98
n41	90	30	2592.99	CP	64QAM	Edge_1RB_Right	22.40
n41	90	30	2592.99	CP	64QAM	Outer_Full	22.36
n41	90	30	2592.99	CP	256QAM	Inner_Full	19.27
n41	90	30	2592.99	CP	256QAM	Edge_1RB_Left	18.99
n41	90	30	2592.99	CP	256QAM	Edge_1RB_Right	19.29
n41	90	30	2592.99	CP	256QAM	Outer_Full	19.35
n41	90	30	2644.98	DFT	QPSK	Inner_Full	25.90
n41	90	30	2644.98	DFT	QPSK	Edge_1RB_Left	21.91
n41	90	30	2644.98	DFT	QPSK	Edge_1RB_Right	22.62
n41	90	30	2644.98	DFT	QPSK	Outer_Full	24.93
n41	90	30	2644.98	DFT	16QAM	Inner_Full	24.79
n41	90	30	2644.98	DFT	16QAM	Edge_1RB_Left	21.79
n41	90	30	2644.98	DFT	16QAM	Edge_1RB_Right	22.41
n41	90	30	2644.98	DFT	16QAM	Outer_Full	23.83
n41	90	30	2644.98	DFT	64QAM	Inner_Full	23.31
n41	90	30	2644.98	DFT	64QAM	Edge_1RB_Left	21.59
n41	90	30	2644.98	DFT	64QAM	Edge_1RB_Right	22.24
n41	90	30	2644.98	DFT	64QAM	Outer_Full	23.32



BAND	BW(MHz)	SCS(kHz)	FREQ(MHz)	OFDM	MODULATION	RB LOCATION	POWER(dBm)
n41	90	30	2644.98	DFT	256QAM	Inner_Full	21.32
n41	90	30	2644.98	DFT	256QAM	Edge_1RB_Left	20.84
n41	90	30	2644.98	DFT	256QAM	Edge_1RB_Right	21.49
n41	90	30	2644.98	DFT	256QAM	Outer_Full	21.29
n41	90	30	2644.98	CP	QPSK	Inner_Full	24.47
n41	90	30	2644.98	CP	QPSK	Edge_1RB_Left	21.95
n41	90	30	2644.98	CP	QPSK	Edge_1RB_Right	22.67
n41	90	30	2644.98	CP	QPSK	Outer_Full	21.81
n41	90	30	2644.98	CP	16QAM	Inner_Full	23.84
n41	90	30	2644.98	CP	16QAM	Edge_1RB_Left	21.93
n41	90	30	2644.98	CP	16QAM	Edge_1RB_Right	22.43
n41	90	30	2644.98	CP	16QAM	Outer_Full	21.83
n41	90	30	2644.98	CP	64QAM	Inner_Full	22.25
n41	90	30	2644.98	CP	64QAM	Edge_1RB_Left	21.69
n41	90	30	2644.98	CP	64QAM	Edge_1RB_Right	22.35
n41	90	30	2644.98	CP	64QAM	Outer_Full	22.28
n41	90	30	2644.98	CP	256QAM	Inner_Full	19.27
n41	90	30	2644.98	CP	256QAM	Edge_1RB_Left	18.74
n41	90	30	2644.98	CP	256QAM	Edge_1RB_Right	19.44
n41	90	30	2644.98	CP	256QAM	Outer_Full	19.29
n41	100	30	2546.01	DFT	QPSK	Inner_Full	25.77
n41	100	30	2546.01	DFT	QPSK	Edge_1RB_Left	22.18
n41	100	30	2546.01	DFT	QPSK	Edge_1RB_Right	22.27
n41	100	30	2546.01	DFT	QPSK	Outer_Full	24.82
n41	100	30	2546.01	DFT	16QAM	Inner_Full	24.72
n41	100	30	2546.01	DFT	16QAM	Edge_1RB_Left	21.93
n41	100	30	2546.01	DFT	16QAM	Edge_1RB_Right	22.09
n41	100	30	2546.01	DFT	16QAM	Outer_Full	23.84
n41	100	30	2546.01	DFT	64QAM	Inner_Full	23.37
n41	100	30	2546.01	DFT	64QAM	Edge_1RB_Left	21.85
n41	100	30	2546.01	DFT	64QAM	Edge_1RB_Right	21.94
n41	100	30	2546.01	DFT	64QAM	Outer_Full	23.32
n41	100	30	2546.01	DFT	256QAM	Inner_Full	21.29
n41	100	30	2546.01	DFT	256QAM	Edge_1RB_Left	21.08
n41	100	30	2546.01	DFT	256QAM	Edge_1RB_Right	21.16
n41	100	30	2546.01	DFT	256QAM	Outer_Full	21.21
n41	100	30	2546.01	CP	QPSK	Inner_Full	24.24
n41	100	30	2546.01	CP	QPSK	Edge_1RB_Left	22.21
n41	100	30	2546.01	CP	QPSK	Edge_1RB_Right	22.34
n41	100	30	2546.01	CP	QPSK	Outer_Full	21.78
n41	100	30	2546.01	CP	16QAM	Inner_Full	23.93



BAND	BW(MHz)	SCS(kHz)	FREQ(MHz)	OFDM	MODULATION	RB LOCATION	POWER(dBm)
n41	100	30	2546.01	CP	16QAM	Edge_1RB_Left	22.14
n41	100	30	2546.01	CP	16QAM	Edge_1RB_Right	22.21
n41	100	30	2546.01	CP	16QAM	Outer_Full	21.75
n41	100	30	2546.01	CP	64QAM	Inner_Full	22.36
n41	100	30	2546.01	CP	64QAM	Edge_1RB_Left	21.96
n41	100	30	2546.01	CP	64QAM	Edge_1RB_Right	22.04
n41	100	30	2546.01	CP	64QAM	Outer_Full	22.38
n41	100	30	2546.01	CP	256QAM	Inner_Full	19.34
n41	100	30	2546.01	CP	256QAM	Edge_1RB_Left	18.93
n41	100	30	2546.01	CP	256QAM	Edge_1RB_Right	19.10
n41	100	30	2546.01	CP	256QAM	Outer_Full	19.40
n41	100	30	2592.99	DFT	QPSK	Inner_Full	25.82
n41	100	30	2592.99	DFT	QPSK	Edge_1RB_Left	22.21
n41	100	30	2592.99	DFT	QPSK	Edge_1RB_Right	22.63
n41	100	30	2592.99	DFT	QPSK	Outer_Full	24.90
n41	100	30	2592.99	DFT	16QAM	Inner_Full	24.81
n41	100	30	2592.99	DFT	16QAM	Edge_1RB_Left	21.99
n41	100	30	2592.99	DFT	16QAM	Edge_1RB_Right	22.30
n41	100	30	2592.99	DFT	16QAM	Outer_Full	23.89
n41	100	30	2592.99	DFT	64QAM	Inner_Full	23.34
n41	100	30	2592.99	DFT	64QAM	Edge_1RB_Left	21.93
n41	100	30	2592.99	DFT	64QAM	Edge_1RB_Right	22.22
n41	100	30	2592.99	DFT	64QAM	Outer_Full	23.37
n41	100	30	2592.99	DFT	256QAM	Inner_Full	21.31
n41	100	30	2592.99	DFT	256QAM	Edge_1RB_Left	21.11
n41	100	30	2592.99	DFT	256QAM	Edge_1RB_Right	21.38
n41	100	30	2592.99	DFT	256QAM	Outer_Full	21.35
n41	100	30	2592.99	CP	QPSK	Inner_Full	24.37
n41	100	30	2592.99	CP	QPSK	Edge_1RB_Left	22.32
n41	100	30	2592.99	CP	QPSK	Edge_1RB_Right	22.48
n41	100	30	2592.99	CP	QPSK	Outer_Full	21.85
n41	100	30	2592.99	CP	16QAM	Inner_Full	23.86
n41	100	30	2592.99	CP	16QAM	Edge_1RB_Left	22.13
n41	100	30	2592.99	CP	16QAM	Edge_1RB_Right	22.53
n41	100	30	2592.99	CP	16QAM	Outer_Full	21.84
n41	100	30	2592.99	CP	64QAM	Inner_Full	22.30
n41	100	30	2592.99	CP	64QAM	Edge_1RB_Left	22.05
n41	100	30	2592.99	CP	64QAM	Edge_1RB_Right	22.24
n41	100	30	2592.99	CP	64QAM	Outer_Full	22.36
n41	100	30	2592.99	CP	256QAM	Inner_Full	19.30
n41	100	30	2592.99	CP	256QAM	Edge_1RB_Left	19.01



BAND	BW(MHz)	SCS(kHz)	FREQ(MHz)	OFDM	MODULATION	RB LOCATION	POWER(dBm)
n41	100	30	2592.99	CP	256QAM	Edge_1RB_Right	19.34
n41	100	30	2592.99	CP	256QAM	Outer_Full	19.32
n41	100	30	2640	DFT	QPSK	Inner_Full	25.85
n41	100	30	2640	DFT	QPSK	Edge_1RB_Left	21.90
n41	100	30	2640	DFT	QPSK	Edge_1RB_Right	22.66
n41	100	30	2640	DFT	QPSK	Outer_Full	24.89
n41	100	30	2640	DFT	16QAM	Inner_Full	24.79
n41	100	30	2640	DFT	16QAM	Edge_1RB_Left	21.72
n41	100	30	2640	DFT	16QAM	Edge_1RB_Right	22.46
n41	100	30	2640	DFT	16QAM	Outer_Full	23.84
n41	100	30	2640	DFT	64QAM	Inner_Full	23.34
n41	100	30	2640	DFT	64QAM	Edge_1RB_Left	21.58
n41	100	30	2640	DFT	64QAM	Edge_1RB_Right	22.31
n41	100	30	2640	DFT	64QAM	Outer_Full	23.34
n41	100	30	2640	DFT	256QAM	Inner_Full	21.32
n41	100	30	2640	DFT	256QAM	Edge_1RB_Left	20.78
n41	100	30	2640	DFT	256QAM	Edge_1RB_Right	21.56
n41	100	30	2640	DFT	256QAM	Outer_Full	21.27
n41	100	30	2640	CP	QPSK	Inner_Full	24.35
n41	100	30	2640	CP	QPSK	Edge_1RB_Left	21.94
n41	100	30	2640	CP	QPSK	Edge_1RB_Right	22.68
n41	100	30	2640	CP	QPSK	Outer_Full	21.77
n41	100	30	2640	CP	16QAM	Inner_Full	23.91
n41	100	30	2640	CP	16QAM	Edge_1RB_Left	21.87
n41	100	30	2640	CP	16QAM	Edge_1RB_Right	22.57
n41	100	30	2640	CP	16QAM	Outer_Full	21.79
n41	100	30	2640	CP	64QAM	Inner_Full	22.42
n41	100	30	2640	CP	64QAM	Edge_1RB_Left	21.70
n41	100	30	2640	CP	64QAM	Edge_1RB_Right	22.39
n41	100	30	2640	CP	64QAM	Outer_Full	22.27
n41	100	30	2640	CP	256QAM	Inner_Full	19.29
n41	100	30	2640	CP	256QAM	Edge_1RB_Left	18.75
n41	100	30	2640	CP	256QAM	Edge_1RB_Right	19.49
n41	100	30	2640	CP	256QAM	Outer_Full	19.29



n66

BAND	BW(MHz)	SCS(kHz)	FREQ(MHz)	OFDM	MODULATION	RB LOCATION	POWER(dBm)
n66	5	15	1712.5	DFT	QPSK	Inner_Full	24.11
n66	5	15	1712.5	DFT	QPSK	Edge_1RB_Left	21.91
n66	5	15	1712.5	DFT	QPSK	Edge_1RB_Right	21.94
n66	5	15	1712.5	DFT	QPSK	Outer_Full	23.55
n66	5	15	1712.5	DFT	16QAM	Inner_Full	23.74
n66	5	15	1712.5	DFT	16QAM	Edge_1RB_Left	22.20
n66	5	15	1712.5	DFT	16QAM	Edge_1RB_Right	22.28
n66	5	15	1712.5	DFT	16QAM	Outer_Full	22.56
n66	5	15	1712.5	DFT	64QAM	Inner_Full	22.21
n66	5	15	1712.5	DFT	64QAM	Edge_1RB_Left	21.31
n66	5	15	1712.5	DFT	64QAM	Edge_1RB_Right	21.38
n66	5	15	1712.5	DFT	64QAM	Outer_Full	22.21
n66	5	15	1712.5	DFT	256QAM	Inner_Full	20.73
n66	5	15	1712.5	DFT	256QAM	Edge_1RB_Left	19.15
n66	5	15	1712.5	DFT	256QAM	Edge_1RB_Right	19.18
n66	5	15	1712.5	DFT	256QAM	Outer_Full	20.59
n66	5	15	1712.5	CP	QPSK	Inner_Full	23.05
n66	5	15	1712.5	CP	QPSK	Edge_1RB_Left	20.97
n66	5	15	1712.5	CP	QPSK	Edge_1RB_Right	21.04
n66	5	15	1712.5	CP	QPSK	Outer_Full	22.01
n66	5	15	1712.5	CP	16QAM	Inner_Full	22.65
n66	5	15	1712.5	CP	16QAM	Edge_1RB_Left	21.46
n66	5	15	1712.5	CP	16QAM	Edge_1RB_Right	21.50
n66	5	15	1712.5	CP	16QAM	Outer_Full	21.98
n66	5	15	1712.5	CP	64QAM	Inner_Full	22.03
n66	5	15	1712.5	CP	64QAM	Edge_1RB_Left	20.23
n66	5	15	1712.5	CP	64QAM	Edge_1RB_Right	20.26
n66	5	15	1712.5	CP	64QAM	Outer_Full	22.06
n66	5	15	1712.5	CP	256QAM	Inner_Full	19.76
n66	5	15	1712.5	CP	256QAM	Edge_1RB_Left	17.26
n66	5	15	1712.5	CP	256QAM	Edge_1RB_Right	17.25
n66	5	15	1712.5	CP	256QAM	Outer_Full	19.62
n66	5	15	1745	DFT	QPSK	Inner_Full	24.24
n66	5	15	1745	DFT	QPSK	Edge_1RB_Left	21.98
n66	5	15	1745	DFT	QPSK	Edge_1RB_Right	22.02
n66	5	15	1745	DFT	QPSK	Outer_Full	23.68
n66	5	15	1745	DFT	16QAM	Inner_Full	23.75
n66	5	15	1745	DFT	16QAM	Edge_1RB_Left	22.09
n66	5	15	1745	DFT	16QAM	Edge_1RB_Right	22.22



BAND	BW(MHz)	SCS(kHz)	FREQ(MHz)	OFDM	MODULATION	RB LOCATION	POWER(dBm)
n66	5	15	1745	DFT	16QAM	Outer_Full	22.79
n66	5	15	1745	DFT	64QAM	Inner_Full	22.50
n66	5	15	1745	DFT	64QAM	Edge_1RB_Left	21.18
n66	5	15	1745	DFT	64QAM	Edge_1RB_Right	21.28
n66	5	15	1745	DFT	64QAM	Outer_Full	22.35
n66	5	15	1745	DFT	256QAM	Inner_Full	20.91
n66	5	15	1745	DFT	256QAM	Edge_1RB_Left	19.14
n66	5	15	1745	DFT	256QAM	Edge_1RB_Right	19.30
n66	5	15	1745	DFT	256QAM	Outer_Full	20.75
n66	5	15	1745	CP	QPSK	Inner_Full	23.23
n66	5	15	1745	CP	QPSK	Edge_1RB_Left	20.99
n66	5	15	1745	CP	QPSK	Edge_1RB_Right	21.07
n66	5	15	1745	CP	QPSK	Outer_Full	22.17
n66	5	15	1745	CP	16QAM	Inner_Full	22.86
n66	5	15	1745	CP	16QAM	Edge_1RB_Left	21.33
n66	5	15	1745	CP	16QAM	Edge_1RB_Right	21.43
n66	5	15	1745	CP	16QAM	Outer_Full	22.14
n66	5	15	1745	CP	64QAM	Inner_Full	22.33
n66	5	15	1745	CP	64QAM	Edge_1RB_Left	20.09
n66	5	15	1745	CP	64QAM	Edge_1RB_Right	20.19
n66	5	15	1745	CP	64QAM	Outer_Full	22.22
n66	5	15	1745	CP	256QAM	Inner_Full	19.80
n66	5	15	1745	CP	256QAM	Edge_1RB_Left	17.16
n66	5	15	1745	CP	256QAM	Edge_1RB_Right	17.28
n66	5	15	1745	CP	256QAM	Outer_Full	19.71
n66	5	15	1777.5	DFT	QPSK	Inner_Full	24.05
n66	5	15	1777.5	DFT	QPSK	Edge_1RB_Left	21.94
n66	5	15	1777.5	DFT	QPSK	Edge_1RB_Right	21.99
n66	5	15	1777.5	DFT	QPSK	Outer_Full	23.10
n66	5	15	1777.5	DFT	16QAM	Inner_Full	23.24
n66	5	15	1777.5	DFT	16QAM	Edge_1RB_Left	22.27
n66	5	15	1777.5	DFT	16QAM	Edge_1RB_Right	22.25
n66	5	15	1777.5	DFT	16QAM	Outer_Full	22.19
n66	5	15	1777.5	DFT	64QAM	Inner_Full	21.92
n66	5	15	1777.5	DFT	64QAM	Edge_1RB_Left	21.19
n66	5	15	1777.5	DFT	64QAM	Edge_1RB_Right	21.39
n66	5	15	1777.5	DFT	64QAM	Outer_Full	21.78
n66	5	15	1777.5	DFT	256QAM	Inner_Full	20.41
n66	5	15	1777.5	DFT	256QAM	Edge_1RB_Left	19.19
n66	5	15	1777.5	DFT	256QAM	Edge_1RB_Right	19.16
n66	5	15	1777.5	DFT	256QAM	Outer_Full	20.22



BAND	BW(MHz)	SCS(kHz)	FREQ(MHz)	OFDM	MODULATION	RB LOCATION	POWER(dBm)
n66	5	15	1777.5	CP	QPSK	Inner_Full	22.69
n66	5	15	1777.5	CP	QPSK	Edge_1RB_Left	21.02
n66	5	15	1777.5	CP	QPSK	Edge_1RB_Right	21.02
n66	5	15	1777.5	CP	QPSK	Outer_Full	21.62
n66	5	15	1777.5	CP	16QAM	Inner_Full	22.36
n66	5	15	1777.5	CP	16QAM	Edge_1RB_Left	21.44
n66	5	15	1777.5	CP	16QAM	Edge_1RB_Right	21.44
n66	5	15	1777.5	CP	16QAM	Outer_Full	21.58
n66	5	15	1777.5	CP	64QAM	Inner_Full	21.75
n66	5	15	1777.5	CP	64QAM	Edge_1RB_Left	20.18
n66	5	15	1777.5	CP	64QAM	Edge_1RB_Right	20.17
n66	5	15	1777.5	CP	64QAM	Outer_Full	21.67
n66	5	15	1777.5	CP	256QAM	Inner_Full	19.33
n66	5	15	1777.5	CP	256QAM	Edge_1RB_Left	17.19
n66	5	15	1777.5	CP	256QAM	Edge_1RB_Right	17.23
n66	5	15	1777.5	CP	256QAM	Outer_Full	19.27
n66	10	15	1715	DFT	QPSK	Inner_Full	24.11
n66	10	15	1715	DFT	QPSK	Edge_1RB_Left	22.02
n66	10	15	1715	DFT	QPSK	Edge_1RB_Right	22.00
n66	10	15	1715	DFT	QPSK	Outer_Full	23.51
n66	10	15	1715	DFT	16QAM	Inner_Full	23.54
n66	10	15	1715	DFT	16QAM	Edge_1RB_Left	22.19
n66	10	15	1715	DFT	16QAM	Edge_1RB_Right	22.26
n66	10	15	1715	DFT	16QAM	Outer_Full	22.54
n66	10	15	1715	DFT	64QAM	Inner_Full	22.27
n66	10	15	1715	DFT	64QAM	Edge_1RB_Left	21.31
n66	10	15	1715	DFT	64QAM	Edge_1RB_Right	21.38
n66	10	15	1715	DFT	64QAM	Outer_Full	22.08
n66	10	15	1715	DFT	256QAM	Inner_Full	20.59
n66	10	15	1715	DFT	256QAM	Edge_1RB_Left	19.18
n66	10	15	1715	DFT	256QAM	Edge_1RB_Right	19.19
n66	10	15	1715	DFT	256QAM	Outer_Full	20.58
n66	10	15	1715	CP	QPSK	Inner_Full	23.01
n66	10	15	1715	CP	QPSK	Edge_1RB_Left	21.02
n66	10	15	1715	CP	QPSK	Edge_1RB_Right	20.98
n66	10	15	1715	CP	QPSK	Outer_Full	21.98
n66	10	15	1715	CP	16QAM	Inner_Full	22.56
n66	10	15	1715	CP	16QAM	Edge_1RB_Left	21.35
n66	10	15	1715	CP	16QAM	Edge_1RB_Right	21.41
n66	10	15	1715	CP	16QAM	Outer_Full	21.91
n66	10	15	1715	CP	64QAM	Inner_Full	22.09



BAND	BW(MHz)	SCS(kHz)	FREQ(MHz)	OFDM	MODULATION	RB LOCATION	POWER(dBm)
n66	10	15	1715	CP	64QAM	Edge_1RB_Left	20.08
n66	10	15	1715	CP	64QAM	Edge_1RB_Right	20.20
n66	10	15	1715	CP	64QAM	Outer_Full	22.02
n66	10	15	1715	CP	256QAM	Inner_Full	19.60
n66	10	15	1715	CP	256QAM	Edge_1RB_Left	17.27
n66	10	15	1715	CP	256QAM	Edge_1RB_Right	17.27
n66	10	15	1715	CP	256QAM	Outer_Full	19.55
n66	10	15	1745	DFT	QPSK	Inner_Full	24.17
n66	10	15	1745	DFT	QPSK	Edge_1RB_Left	21.91
n66	10	15	1745	DFT	QPSK	Edge_1RB_Right	22.01
n66	10	15	1745	DFT	QPSK	Outer_Full	23.58
n66	10	15	1745	DFT	16QAM	Inner_Full	23.74
n66	10	15	1745	DFT	16QAM	Edge_1RB_Left	22.18
n66	10	15	1745	DFT	16QAM	Edge_1RB_Right	22.25
n66	10	15	1745	DFT	16QAM	Outer_Full	22.74
n66	10	15	1745	DFT	64QAM	Inner_Full	22.50
n66	10	15	1745	DFT	64QAM	Edge_1RB_Left	21.29
n66	10	15	1745	DFT	64QAM	Edge_1RB_Right	21.36
n66	10	15	1745	DFT	64QAM	Outer_Full	22.22
n66	10	15	1745	DFT	256QAM	Inner_Full	20.65
n66	10	15	1745	DFT	256QAM	Edge_1RB_Left	19.13
n66	10	15	1745	DFT	256QAM	Edge_1RB_Right	19.20
n66	10	15	1745	DFT	256QAM	Outer_Full	20.65
n66	10	15	1745	CP	QPSK	Inner_Full	23.24
n66	10	15	1745	CP	QPSK	Edge_1RB_Left	20.94
n66	10	15	1745	CP	QPSK	Edge_1RB_Right	21.01
n66	10	15	1745	CP	QPSK	Outer_Full	22.15
n66	10	15	1745	CP	16QAM	Inner_Full	22.72
n66	10	15	1745	CP	16QAM	Edge_1RB_Left	21.34
n66	10	15	1745	CP	16QAM	Edge_1RB_Right	21.43
n66	10	15	1745	CP	16QAM	Outer_Full	22.20
n66	10	15	1745	CP	64QAM	Inner_Full	22.49
n66	10	15	1745	CP	64QAM	Edge_1RB_Left	20.13
n66	10	15	1745	CP	64QAM	Edge_1RB_Right	20.08
n66	10	15	1745	CP	64QAM	Outer_Full	22.25
n66	10	15	1745	CP	256QAM	Inner_Full	19.73
n66	10	15	1745	CP	256QAM	Edge_1RB_Left	17.23
n66	10	15	1745	CP	256QAM	Edge_1RB_Right	17.30
n66	10	15	1745	CP	256QAM	Outer_Full	19.64
n66	10	15	1775	DFT	QPSK	Inner_Full	24.15
n66	10	15	1775	DFT	QPSK	Edge_1RB_Left	21.90



BAND	BW(MHz)	SCS(kHz)	FREQ(MHz)	OFDM	MODULATION	RB LOCATION	POWER(dBm)
n66	10	15	1775	DFT	QPSK	Edge_1RB_Right	22.03
n66	10	15	1775	DFT	QPSK	Outer_Full	23.30
n66	10	15	1775	DFT	16QAM	Inner_Full	23.44
n66	10	15	1775	DFT	16QAM	Edge_1RB_Left	22.21
n66	10	15	1775	DFT	16QAM	Edge_1RB_Right	22.26
n66	10	15	1775	DFT	16QAM	Outer_Full	22.33
n66	10	15	1775	DFT	64QAM	Inner_Full	22.06
n66	10	15	1775	DFT	64QAM	Edge_1RB_Left	21.35
n66	10	15	1775	DFT	64QAM	Edge_1RB_Right	21.41
n66	10	15	1775	DFT	64QAM	Outer_Full	21.88
n66	10	15	1775	DFT	256QAM	Inner_Full	20.45
n66	10	15	1775	DFT	256QAM	Edge_1RB_Left	19.15
n66	10	15	1775	DFT	256QAM	Edge_1RB_Right	19.19
n66	10	15	1775	DFT	256QAM	Outer_Full	20.41
n66	10	15	1775	CP	QPSK	Inner_Full	22.88
n66	10	15	1775	CP	QPSK	Edge_1RB_Left	21.02
n66	10	15	1775	CP	QPSK	Edge_1RB_Right	21.05
n66	10	15	1775	CP	QPSK	Outer_Full	21.78
n66	10	15	1775	CP	16QAM	Inner_Full	22.40
n66	10	15	1775	CP	16QAM	Edge_1RB_Left	21.32
n66	10	15	1775	CP	16QAM	Edge_1RB_Right	21.45
n66	10	15	1775	CP	16QAM	Outer_Full	21.69
n66	10	15	1775	CP	64QAM	Inner_Full	21.92
n66	10	15	1775	CP	64QAM	Edge_1RB_Left	20.14
n66	10	15	1775	CP	64QAM	Edge_1RB_Right	20.20
n66	10	15	1775	CP	64QAM	Outer_Full	21.81
n66	10	15	1775	CP	256QAM	Inner_Full	19.45
n66	10	15	1775	CP	256QAM	Edge_1RB_Left	17.31
n66	10	15	1775	CP	256QAM	Edge_1RB_Right	17.20
n66	10	15	1775	CP	256QAM	Outer_Full	19.30
n66	15	15	1717.5	DFT	QPSK	Inner_Full	24.28
n66	15	15	1717.5	DFT	QPSK	Edge_1RB_Left	22.10
n66	15	15	1717.5	DFT	QPSK	Edge_1RB_Right	22.02
n66	15	15	1717.5	DFT	QPSK	Outer_Full	23.70
n66	15	15	1717.5	DFT	16QAM	Inner_Full	23.52
n66	15	15	1717.5	DFT	16QAM	Edge_1RB_Left	22.29
n66	15	15	1717.5	DFT	16QAM	Edge_1RB_Right	22.26
n66	15	15	1717.5	DFT	16QAM	Outer_Full	22.70
n66	15	15	1717.5	DFT	64QAM	Inner_Full	22.27
n66	15	15	1717.5	DFT	64QAM	Edge_1RB_Left	21.35
n66	15	15	1717.5	DFT	64QAM	Edge_1RB_Right	21.40



BAND	BW(MHz)	SCS(kHz)	FREQ(MHz)	OFDM	MODULATION	RB LOCATION	POWER(dBm)
n66	15	15	1717.5	DFT	64QAM	Outer_Full	22.28
n66	15	15	1717.5	DFT	256QAM	Inner_Full	20.84
n66	15	15	1717.5	DFT	256QAM	Edge_1RB_Left	19.25
n66	15	15	1717.5	DFT	256QAM	Edge_1RB_Right	19.29
n66	15	15	1717.5	DFT	256QAM	Outer_Full	20.74
n66	15	15	1717.5	CP	QPSK	Inner_Full	22.98
n66	15	15	1717.5	CP	QPSK	Edge_1RB_Left	21.08
n66	15	15	1717.5	CP	QPSK	Edge_1RB_Right	21.15
n66	15	15	1717.5	CP	QPSK	Outer_Full	22.18
n66	15	15	1717.5	CP	16QAM	Inner_Full	22.56
n66	15	15	1717.5	CP	16QAM	Edge_1RB_Left	21.37
n66	15	15	1717.5	CP	16QAM	Edge_1RB_Right	21.46
n66	15	15	1717.5	CP	16QAM	Outer_Full	22.08
n66	15	15	1717.5	CP	64QAM	Inner_Full	22.14
n66	15	15	1717.5	CP	64QAM	Edge_1RB_Left	20.30
n66	15	15	1717.5	CP	64QAM	Edge_1RB_Right	20.36
n66	15	15	1717.5	CP	64QAM	Outer_Full	22.18
n66	15	15	1717.5	CP	256QAM	Inner_Full	19.80
n66	15	15	1717.5	CP	256QAM	Edge_1RB_Left	17.23
n66	15	15	1717.5	CP	256QAM	Edge_1RB_Right	17.30
n66	15	15	1717.5	CP	256QAM	Outer_Full	19.74
n66	15	15	1745	DFT	QPSK	Inner_Full	24.18
n66	15	15	1745	DFT	QPSK	Edge_1RB_Left	22.01
n66	15	15	1745	DFT	QPSK	Edge_1RB_Right	21.97
n66	15	15	1745	DFT	QPSK	Outer_Full	23.83
n66	15	15	1745	DFT	16QAM	Inner_Full	23.62
n66	15	15	1745	DFT	16QAM	Edge_1RB_Left	22.31
n66	15	15	1745	DFT	16QAM	Edge_1RB_Right	22.16
n66	15	15	1745	DFT	16QAM	Outer_Full	22.78
n66	15	15	1745	DFT	64QAM	Inner_Full	22.57
n66	15	15	1745	DFT	64QAM	Edge_1RB_Left	21.39
n66	15	15	1745	DFT	64QAM	Edge_1RB_Right	21.24
n66	15	15	1745	DFT	64QAM	Outer_Full	22.31
n66	15	15	1745	DFT	256QAM	Inner_Full	20.86
n66	15	15	1745	DFT	256QAM	Edge_1RB_Left	19.21
n66	15	15	1745	DFT	256QAM	Edge_1RB_Right	19.18
n66	15	15	1745	DFT	256QAM	Outer_Full	20.78
n66	15	15	1745	CP	QPSK	Inner_Full	23.16
n66	15	15	1745	CP	QPSK	Edge_1RB_Left	21.03
n66	15	15	1745	CP	QPSK	Edge_1RB_Right	21.01
n66	15	15	1745	CP	QPSK	Outer_Full	22.21



BAND	BW(MHz)	SCS(kHz)	FREQ(MHz)	OFDM	MODULATION	RB LOCATION	POWER(dBm)
n66	15	15	1745	CP	16QAM	Inner_Full	22.85
n66	15	15	1745	CP	16QAM	Edge_1RB_Left	21.39
n66	15	15	1745	CP	16QAM	Edge_1RB_Right	21.47
n66	15	15	1745	CP	16QAM	Outer_Full	22.24
n66	15	15	1745	CP	64QAM	Inner_Full	22.30
n66	15	15	1745	CP	64QAM	Edge_1RB_Left	20.30
n66	15	15	1745	CP	64QAM	Edge_1RB_Right	20.37
n66	15	15	1745	CP	64QAM	Outer_Full	22.22
n66	15	15	1745	CP	256QAM	Inner_Full	19.81
n66	15	15	1745	CP	256QAM	Edge_1RB_Left	17.29
n66	15	15	1745	CP	256QAM	Edge_1RB_Right	17.29
n66	15	15	1745	CP	256QAM	Outer_Full	19.69
n66	15	15	1772.5	DFT	QPSK	Inner_Full	24.24
n66	15	15	1772.5	DFT	QPSK	Edge_1RB_Left	22.02
n66	15	15	1772.5	DFT	QPSK	Edge_1RB_Right	22.01
n66	15	15	1772.5	DFT	QPSK	Outer_Full	23.45
n66	15	15	1772.5	DFT	16QAM	Inner_Full	23.42
n66	15	15	1772.5	DFT	16QAM	Edge_1RB_Left	22.18
n66	15	15	1772.5	DFT	16QAM	Edge_1RB_Right	22.18
n66	15	15	1772.5	DFT	16QAM	Outer_Full	22.51
n66	15	15	1772.5	DFT	64QAM	Inner_Full	22.12
n66	15	15	1772.5	DFT	64QAM	Edge_1RB_Left	21.36
n66	15	15	1772.5	DFT	64QAM	Edge_1RB_Right	21.29
n66	15	15	1772.5	DFT	64QAM	Outer_Full	21.99
n66	15	15	1772.5	DFT	256QAM	Inner_Full	20.59
n66	15	15	1772.5	DFT	256QAM	Edge_1RB_Left	19.24
n66	15	15	1772.5	DFT	256QAM	Edge_1RB_Right	19.22
n66	15	15	1772.5	DFT	256QAM	Outer_Full	20.45
n66	15	15	1772.5	CP	QPSK	Inner_Full	22.87
n66	15	15	1772.5	CP	QPSK	Edge_1RB_Left	21.02
n66	15	15	1772.5	CP	QPSK	Edge_1RB_Right	21.06
n66	15	15	1772.5	CP	QPSK	Outer_Full	21.85
n66	15	15	1772.5	CP	16QAM	Inner_Full	22.42
n66	15	15	1772.5	CP	16QAM	Edge_1RB_Left	21.32
n66	15	15	1772.5	CP	16QAM	Edge_1RB_Right	21.33
n66	15	15	1772.5	CP	16QAM	Outer_Full	21.88
n66	15	15	1772.5	CP	64QAM	Inner_Full	22.02
n66	15	15	1772.5	CP	64QAM	Edge_1RB_Left	20.24
n66	15	15	1772.5	CP	64QAM	Edge_1RB_Right	20.27
n66	15	15	1772.5	CP	64QAM	Outer_Full	21.87
n66	15	15	1772.5	CP	256QAM	Inner_Full	19.57



BAND	BW(MHz)	SCS(kHz)	FREQ(MHz)	OFDM	MODULATION	RB LOCATION	POWER(dBm)
n66	15	15	1772.5	CP	256QAM	Edge_1RB_Left	17.23
n66	15	15	1772.5	CP	256QAM	Edge_1RB_Right	17.21
n66	15	15	1772.5	CP	256QAM	Outer_Full	19.46
n66	20	15	1720	DFT	QPSK	Inner_Full	24.23
n66	20	15	1720	DFT	QPSK	Edge_1RB_Left	21.97
n66	20	15	1720	DFT	QPSK	Edge_1RB_Right	22.03
n66	20	15	1720	DFT	QPSK	Outer_Full	23.80
n66	20	15	1720	DFT	16QAM	Inner_Full	23.63
n66	20	15	1720	DFT	16QAM	Edge_1RB_Left	22.13
n66	20	15	1720	DFT	16QAM	Edge_1RB_Right	22.30
n66	20	15	1720	DFT	16QAM	Outer_Full	22.87
n66	20	15	1720	DFT	64QAM	Inner_Full	22.30
n66	20	15	1720	DFT	64QAM	Edge_1RB_Left	21.21
n66	20	15	1720	DFT	64QAM	Edge_1RB_Right	21.44
n66	20	15	1720	DFT	64QAM	Outer_Full	22.36
n66	20	15	1720	DFT	256QAM	Inner_Full	20.75
n66	20	15	1720	DFT	256QAM	Edge_1RB_Left	19.20
n66	20	15	1720	DFT	256QAM	Edge_1RB_Right	19.19
n66	20	15	1720	DFT	256QAM	Outer_Full	20.86
n66	20	15	1720	CP	QPSK	Inner_Full	23.13
n66	20	15	1720	CP	QPSK	Edge_1RB_Left	20.98
n66	20	15	1720	CP	QPSK	Edge_1RB_Right	21.13
n66	20	15	1720	CP	QPSK	Outer_Full	22.21
n66	20	15	1720	CP	16QAM	Inner_Full	22.64
n66	20	15	1720	CP	16QAM	Edge_1RB_Left	21.29
n66	20	15	1720	CP	16QAM	Edge_1RB_Right	21.49
n66	20	15	1720	CP	16QAM	Outer_Full	22.17
n66	20	15	1720	CP	64QAM	Inner_Full	22.41
n66	20	15	1720	CP	64QAM	Edge_1RB_Left	20.15
n66	20	15	1720	CP	64QAM	Edge_1RB_Right	20.37
n66	20	15	1720	CP	64QAM	Outer_Full	22.22
n66	20	15	1720	CP	256QAM	Inner_Full	19.88
n66	20	15	1720	CP	256QAM	Edge_1RB_Left	17.13
n66	20	15	1720	CP	256QAM	Edge_1RB_Right	17.42
n66	20	15	1720	CP	256QAM	Outer_Full	19.88
n66	20	15	1745	DFT	QPSK	Inner_Full	24.11
n66	20	15	1745	DFT	QPSK	Edge_1RB_Left	21.90
n66	20	15	1745	DFT	QPSK	Edge_1RB_Right	21.92
n66	20	15	1745	DFT	QPSK	Outer_Full	23.67
n66	20	15	1745	DFT	16QAM	Inner_Full	23.60
n66	20	15	1745	DFT	16QAM	Edge_1RB_Left	22.18



BAND	BW(MHz)	SCS(kHz)	FREQ(MHz)	OFDM	MODULATION	RB LOCATION	POWER(dBm)
n66	20	15	1745	DFT	16QAM	Edge_1RB_Right	22.18
n66	20	15	1745	DFT	16QAM	Outer_Full	22.83
n66	20	15	1745	DFT	64QAM	Inner_Full	22.31
n66	20	15	1745	DFT	64QAM	Edge_1RB_Left	21.28
n66	20	15	1745	DFT	64QAM	Edge_1RB_Right	21.33
n66	20	15	1745	DFT	64QAM	Outer_Full	22.30
n66	20	15	1745	DFT	256QAM	Inner_Full	20.76
n66	20	15	1745	DFT	256QAM	Edge_1RB_Left	19.11
n66	20	15	1745	DFT	256QAM	Edge_1RB_Right	19.10
n66	20	15	1745	DFT	256QAM	Outer_Full	20.74
n66	20	15	1745	CP	QPSK	Inner_Full	23.16
n66	20	15	1745	CP	QPSK	Edge_1RB_Left	20.95
n66	20	15	1745	CP	QPSK	Edge_1RB_Right	21.01
n66	20	15	1745	CP	QPSK	Outer_Full	22.15
n66	20	15	1745	CP	16QAM	Inner_Full	22.79
n66	20	15	1745	CP	16QAM	Edge_1RB_Left	21.31
n66	20	15	1745	CP	16QAM	Edge_1RB_Right	21.42
n66	20	15	1745	CP	16QAM	Outer_Full	22.18
n66	20	15	1745	CP	64QAM	Inner_Full	22.32
n66	20	15	1745	CP	64QAM	Edge_1RB_Left	20.19
n66	20	15	1745	CP	64QAM	Edge_1RB_Right	20.33
n66	20	15	1745	CP	64QAM	Outer_Full	22.23
n66	20	15	1745	CP	256QAM	Inner_Full	19.80
n66	20	15	1745	CP	256QAM	Edge_1RB_Left	17.23
n66	20	15	1745	CP	256QAM	Edge_1RB_Right	17.27
n66	20	15	1745	CP	256QAM	Outer_Full	19.73
n66	20	15	1770	DFT	QPSK	Inner_Full	24.16
n66	20	15	1770	DFT	QPSK	Edge_1RB_Left	21.97
n66	20	15	1770	DFT	QPSK	Edge_1RB_Right	21.97
n66	20	15	1770	DFT	QPSK	Outer_Full	23.44
n66	20	15	1770	DFT	16QAM	Inner_Full	23.46
n66	20	15	1770	DFT	16QAM	Edge_1RB_Left	22.15
n66	20	15	1770	DFT	16QAM	Edge_1RB_Right	22.15
n66	20	15	1770	DFT	16QAM	Outer_Full	22.52
n66	20	15	1770	DFT	64QAM	Inner_Full	22.01
n66	20	15	1770	DFT	64QAM	Edge_1RB_Left	21.23
n66	20	15	1770	DFT	64QAM	Edge_1RB_Right	21.27
n66	20	15	1770	DFT	64QAM	Outer_Full	22.00
n66	20	15	1770	DFT	256QAM	Inner_Full	20.51
n66	20	15	1770	DFT	256QAM	Edge_1RB_Left	19.09
n66	20	15	1770	DFT	256QAM	Edge_1RB_Right	19.08



BAND	BW(MHz)	SCS(kHz)	FREQ(MHz)	OFDM	MODULATION	RB LOCATION	POWER(dBm)
n66	20	15	1770	DFT	256QAM	Outer_Full	20.49
n66	20	15	1770	CP	QPSK	Inner_Full	22.83
n66	20	15	1770	CP	QPSK	Edge_1RB_Left	20.96
n66	20	15	1770	CP	QPSK	Edge_1RB_Right	20.95
n66	20	15	1770	CP	QPSK	Outer_Full	21.82
n66	20	15	1770	CP	16QAM	Inner_Full	22.31
n66	20	15	1770	CP	16QAM	Edge_1RB_Left	21.31
n66	20	15	1770	CP	16QAM	Edge_1RB_Right	21.36
n66	20	15	1770	CP	16QAM	Outer_Full	21.77
n66	20	15	1770	CP	64QAM	Inner_Full	22.03
n66	20	15	1770	CP	64QAM	Edge_1RB_Left	20.17
n66	20	15	1770	CP	64QAM	Edge_1RB_Right	20.31
n66	20	15	1770	CP	64QAM	Outer_Full	21.88
n66	20	15	1770	CP	256QAM	Inner_Full	19.54
n66	20	15	1770	CP	256QAM	Edge_1RB_Left	17.18
n66	20	15	1770	CP	256QAM	Edge_1RB_Right	17.28
n66	20	15	1770	CP	256QAM	Outer_Full	19.51
n66	25	15	1722.5	DFT	QPSK	Inner_Full	24.19
n66	25	15	1722.5	DFT	QPSK	Edge_1RB_Left	22.06
n66	25	15	1722.5	DFT	QPSK	Edge_1RB_Right	22.20
n66	25	15	1722.5	DFT	QPSK	Outer_Full	23.89
n66	25	15	1722.5	DFT	16QAM	Inner_Full	23.76
n66	25	15	1722.5	DFT	16QAM	Edge_1RB_Left	22.29
n66	25	15	1722.5	DFT	16QAM	Edge_1RB_Right	22.40
n66	25	15	1722.5	DFT	16QAM	Outer_Full	23.00
n66	25	15	1722.5	DFT	64QAM	Inner_Full	22.42
n66	25	15	1722.5	DFT	64QAM	Edge_1RB_Left	21.36
n66	25	15	1722.5	DFT	64QAM	Edge_1RB_Right	21.54
n66	25	15	1722.5	DFT	64QAM	Outer_Full	22.52
n66	25	15	1722.5	DFT	256QAM	Inner_Full	20.86
n66	25	15	1722.5	DFT	256QAM	Edge_1RB_Left	19.17
n66	25	15	1722.5	DFT	256QAM	Edge_1RB_Right	19.41
n66	25	15	1722.5	DFT	256QAM	Outer_Full	21.04
n66	25	15	1722.5	CP	QPSK	Inner_Full	23.17
n66	25	15	1722.5	CP	QPSK	Edge_1RB_Left	21.00
n66	25	15	1722.5	CP	QPSK	Edge_1RB_Right	21.23
n66	25	15	1722.5	CP	QPSK	Outer_Full	22.43
n66	25	15	1722.5	CP	16QAM	Inner_Full	22.79
n66	25	15	1722.5	CP	16QAM	Edge_1RB_Left	21.44
n66	25	15	1722.5	CP	16QAM	Edge_1RB_Right	21.58
n66	25	15	1722.5	CP	16QAM	Outer_Full	22.35



BAND	BW(MHz)	SCS(kHz)	FREQ(MHz)	OFDM	MODULATION	RB LOCATION	POWER(dBm)
n66	25	15	1722.5	CP	64QAM	Inner_Full	22.40
n66	25	15	1722.5	CP	64QAM	Edge_1RB_Left	20.30
n66	25	15	1722.5	CP	64QAM	Edge_1RB_Right	20.48
n66	25	15	1722.5	CP	64QAM	Outer_Full	22.41
n66	25	15	1722.5	CP	256QAM	Inner_Full	20.05
n66	25	15	1722.5	CP	256QAM	Edge_1RB_Left	17.29
n66	25	15	1722.5	CP	256QAM	Edge_1RB_Right	17.42
n66	25	15	1722.5	CP	256QAM	Outer_Full	20.02
n66	25	15	1745	DFT	QPSK	Inner_Full	24.27
n66	25	15	1745	DFT	QPSK	Edge_1RB_Left	22.04
n66	25	15	1745	DFT	QPSK	Edge_1RB_Right	22.22
n66	25	15	1745	DFT	QPSK	Outer_Full	23.94
n66	25	15	1745	DFT	16QAM	Inner_Full	23.71
n66	25	15	1745	DFT	16QAM	Edge_1RB_Left	22.30
n66	25	15	1745	DFT	16QAM	Edge_1RB_Right	22.38
n66	25	15	1745	DFT	16QAM	Outer_Full	23.00
n66	25	15	1745	DFT	64QAM	Inner_Full	22.35
n66	25	15	1745	DFT	64QAM	Edge_1RB_Left	21.34
n66	25	15	1745	DFT	64QAM	Edge_1RB_Right	21.49
n66	25	15	1745	DFT	64QAM	Outer_Full	22.32
n66	25	15	1745	DFT	256QAM	Inner_Full	20.65
n66	25	15	1745	DFT	256QAM	Edge_1RB_Left	19.22
n66	25	15	1745	DFT	256QAM	Edge_1RB_Right	19.41
n66	25	15	1745	DFT	256QAM	Outer_Full	20.94
n66	25	15	1745	CP	QPSK	Inner_Full	23.20
n66	25	15	1745	CP	QPSK	Edge_1RB_Left	21.08
n66	25	15	1745	CP	QPSK	Edge_1RB_Right	21.20
n66	25	15	1745	CP	QPSK	Outer_Full	22.29
n66	25	15	1745	CP	16QAM	Inner_Full	22.75
n66	25	15	1745	CP	16QAM	Edge_1RB_Left	21.47
n66	25	15	1745	CP	16QAM	Edge_1RB_Right	21.55
n66	25	15	1745	CP	16QAM	Outer_Full	22.35
n66	25	15	1745	CP	64QAM	Inner_Full	22.37
n66	25	15	1745	CP	64QAM	Edge_1RB_Left	20.31
n66	25	15	1745	CP	64QAM	Edge_1RB_Right	20.42
n66	25	15	1745	CP	64QAM	Outer_Full	22.23
n66	25	15	1745	CP	256QAM	Inner_Full	20.18
n66	25	15	1745	CP	256QAM	Edge_1RB_Left	17.34
n66	25	15	1745	CP	256QAM	Edge_1RB_Right	17.40
n66	25	15	1745	CP	256QAM	Outer_Full	19.86
n66	25	15	1767.5	DFT	QPSK	Inner_Full	24.07



BAND	BW(MHz)	SCS(kHz)	FREQ(MHz)	OFDM	MODULATION	RB LOCATION	POWER(dBm)
n66	25	15	1767.5	DFT	QPSK	Edge_1RB_Left	22.12
n66	25	15	1767.5	DFT	QPSK	Edge_1RB_Right	22.10
n66	25	15	1767.5	DFT	QPSK	Outer_Full	23.57
n66	25	15	1767.5	DFT	16QAM	Inner_Full	23.38
n66	25	15	1767.5	DFT	16QAM	Edge_1RB_Left	22.26
n66	25	15	1767.5	DFT	16QAM	Edge_1RB_Right	22.09
n66	25	15	1767.5	DFT	16QAM	Outer_Full	22.65
n66	25	15	1767.5	DFT	64QAM	Inner_Full	22.02
n66	25	15	1767.5	DFT	64QAM	Edge_1RB_Left	21.42
n66	25	15	1767.5	DFT	64QAM	Edge_1RB_Right	21.06
n66	25	15	1767.5	DFT	64QAM	Outer_Full	21.98
n66	25	15	1767.5	DFT	256QAM	Inner_Full	20.39
n66	25	15	1767.5	DFT	256QAM	Edge_1RB_Left	19.28
n66	25	15	1767.5	DFT	256QAM	Edge_1RB_Right	19.27
n66	25	15	1767.5	DFT	256QAM	Outer_Full	20.60
n66	25	15	1767.5	CP	QPSK	Inner_Full	22.80
n66	25	15	1767.5	CP	QPSK	Edge_1RB_Left	21.13
n66	25	15	1767.5	CP	QPSK	Edge_1RB_Right	21.17
n66	25	15	1767.5	CP	QPSK	Outer_Full	22.06
n66	25	15	1767.5	CP	16QAM	Inner_Full	22.43
n66	25	15	1767.5	CP	16QAM	Edge_1RB_Left	21.47
n66	25	15	1767.5	CP	16QAM	Edge_1RB_Right	21.54
n66	25	15	1767.5	CP	16QAM	Outer_Full	21.97
n66	25	15	1767.5	CP	64QAM	Inner_Full	21.94
n66	25	15	1767.5	CP	64QAM	Edge_1RB_Left	20.37
n66	25	15	1767.5	CP	64QAM	Edge_1RB_Right	20.32
n66	25	15	1767.5	CP	64QAM	Outer_Full	21.92
n66	25	15	1767.5	CP	256QAM	Inner_Full	19.63
n66	25	15	1767.5	CP	256QAM	Edge_1RB_Left	17.30
n66	25	15	1767.5	CP	256QAM	Edge_1RB_Right	17.38
n66	25	15	1767.5	CP	256QAM	Outer_Full	19.51
n66	30	15	1725	DFT	QPSK	Inner_Full	24.25
n66	30	15	1725	DFT	QPSK	Edge_1RB_Left	21.98
n66	30	15	1725	DFT	QPSK	Edge_1RB_Right	22.27
n66	30	15	1725	DFT	QPSK	Outer_Full	24.07
n66	30	15	1725	DFT	16QAM	Inner_Full	23.88
n66	30	15	1725	DFT	16QAM	Edge_1RB_Left	22.27
n66	30	15	1725	DFT	16QAM	Edge_1RB_Right	22.38
n66	30	15	1725	DFT	16QAM	Outer_Full	23.07
n66	30	15	1725	DFT	64QAM	Inner_Full	22.49
n66	30	15	1725	DFT	64QAM	Edge_1RB_Left	21.32



BAND	BW(MHz)	SCS(kHz)	FREQ(MHz)	OFDM	MODULATION	RB LOCATION	POWER(dBm)
n66	30	15	1725	DFT	64QAM	Edge_1RB_Right	21.44
n66	30	15	1725	DFT	64QAM	Outer_Full	22.58
n66	30	15	1725	DFT	256QAM	Inner_Full	21.00
n66	30	15	1725	DFT	256QAM	Edge_1RB_Left	19.21
n66	30	15	1725	DFT	256QAM	Edge_1RB_Right	19.39
n66	30	15	1725	DFT	256QAM	Outer_Full	21.13
n66	30	15	1725	CP	QPSK	Inner_Full	23.37
n66	30	15	1725	CP	QPSK	Edge_1RB_Left	21.09
n66	30	15	1725	CP	QPSK	Edge_1RB_Right	21.16
n66	30	15	1725	CP	QPSK	Outer_Full	22.38
n66	30	15	1725	CP	16QAM	Inner_Full	22.89
n66	30	15	1725	CP	16QAM	Edge_1RB_Left	21.38
n66	30	15	1725	CP	16QAM	Edge_1RB_Right	21.63
n66	30	15	1725	CP	16QAM	Outer_Full	22.41
n66	30	15	1725	CP	64QAM	Inner_Full	22.47
n66	30	15	1725	CP	64QAM	Edge_1RB_Left	20.29
n66	30	15	1725	CP	64QAM	Edge_1RB_Right	20.51
n66	30	15	1725	CP	64QAM	Outer_Full	22.34
n66	30	15	1725	CP	256QAM	Inner_Full	20.07
n66	30	15	1725	CP	256QAM	Edge_1RB_Left	17.29
n66	30	15	1725	CP	256QAM	Edge_1RB_Right	17.53
n66	30	15	1725	CP	256QAM	Outer_Full	20.11
n66	30	15	1745	DFT	QPSK	Inner_Full	24.24
n66	30	15	1745	DFT	QPSK	Edge_1RB_Left	22.09
n66	30	15	1745	DFT	QPSK	Edge_1RB_Right	22.15
n66	30	15	1745	DFT	QPSK	Outer_Full	23.93
n66	30	15	1745	DFT	16QAM	Inner_Full	23.80
n66	30	15	1745	DFT	16QAM	Edge_1RB_Left	22.29
n66	30	15	1745	DFT	16QAM	Edge_1RB_Right	22.41
n66	30	15	1745	DFT	16QAM	Outer_Full	22.98
n66	30	15	1745	DFT	64QAM	Inner_Full	22.35
n66	30	15	1745	DFT	64QAM	Edge_1RB_Left	21.34
n66	30	15	1745	DFT	64QAM	Edge_1RB_Right	21.54
n66	30	15	1745	DFT	64QAM	Outer_Full	22.50
n66	30	15	1745	DFT	256QAM	Inner_Full	20.79
n66	30	15	1745	DFT	256QAM	Edge_1RB_Left	19.26
n66	30	15	1745	DFT	256QAM	Edge_1RB_Right	19.46
n66	30	15	1745	DFT	256QAM	Outer_Full	20.88
n66	30	15	1745	CP	QPSK	Inner_Full	23.11
n66	30	15	1745	CP	QPSK	Edge_1RB_Left	21.04
n66	30	15	1745	CP	QPSK	Edge_1RB_Right	21.19



BAND	BW(MHz)	SCS(kHz)	FREQ(MHz)	OFDM	MODULATION	RB LOCATION	POWER(dBm)
n66	30	15	1745	CP	QPSK	Outer_Full	22.23
n66	30	15	1745	CP	16QAM	Inner_Full	23.12
n66	30	15	1745	CP	16QAM	Edge_1RB_Left	21.43
n66	30	15	1745	CP	16QAM	Edge_1RB_Right	21.65
n66	30	15	1745	CP	16QAM	Outer_Full	22.26
n66	30	15	1745	CP	64QAM	Inner_Full	20.60
n66	30	15	1745	CP	64QAM	Edge_1RB_Left	20.22
n66	30	15	1745	CP	64QAM	Edge_1RB_Right	20.42
n66	30	15	1745	CP	64QAM	Outer_Full	22.26
n66	30	15	1745	CP	256QAM	Inner_Full	19.86
n66	30	15	1745	CP	256QAM	Edge_1RB_Left	17.39
n66	30	15	1745	CP	256QAM	Edge_1RB_Right	17.48
n66	30	15	1745	CP	256QAM	Outer_Full	19.96
n66	30	15	1765	DFT	QPSK	Inner_Full	24.13
n66	30	15	1765	DFT	QPSK	Edge_1RB_Left	21.98
n66	30	15	1765	DFT	QPSK	Edge_1RB_Right	22.01
n66	30	15	1765	DFT	QPSK	Outer_Full	23.75
n66	30	15	1765	DFT	16QAM	Inner_Full	23.37
n66	30	15	1765	DFT	16QAM	Edge_1RB_Left	22.27
n66	30	15	1765	DFT	16QAM	Edge_1RB_Right	22.10
n66	30	15	1765	DFT	16QAM	Outer_Full	22.63
n66	30	15	1765	DFT	64QAM	Inner_Full	22.00
n66	30	15	1765	DFT	64QAM	Edge_1RB_Left	21.44
n66	30	15	1765	DFT	64QAM	Edge_1RB_Right	21.06
n66	30	15	1765	DFT	64QAM	Outer_Full	22.14
n66	30	15	1765	DFT	256QAM	Inner_Full	20.44
n66	30	15	1765	DFT	256QAM	Edge_1RB_Left	19.22
n66	30	15	1765	DFT	256QAM	Edge_1RB_Right	19.30
n66	30	15	1765	DFT	256QAM	Outer_Full	20.60
n66	30	15	1765	CP	QPSK	Inner_Full	22.88
n66	30	15	1765	CP	QPSK	Edge_1RB_Left	20.99
n66	30	15	1765	CP	QPSK	Edge_1RB_Right	21.09
n66	30	15	1765	CP	QPSK	Outer_Full	21.97
n66	30	15	1765	CP	16QAM	Inner_Full	22.19
n66	30	15	1765	CP	16QAM	Edge_1RB_Left	21.41
n66	30	15	1765	CP	16QAM	Edge_1RB_Right	21.52
n66	30	15	1765	CP	16QAM	Outer_Full	21.96
n66	30	15	1765	CP	64QAM	Inner_Full	22.06
n66	30	15	1765	CP	64QAM	Edge_1RB_Left	20.38
n66	30	15	1765	CP	64QAM	Edge_1RB_Right	20.37
n66	30	15	1765	CP	64QAM	Outer_Full	22.03



BAND	BW(MHz)	SCS(kHz)	FREQ(MHz)	OFDM	MODULATION	RB LOCATION	POWER(dBm)
n66	30	15	1765	CP	256QAM	Inner_Full	19.58
n66	30	15	1765	CP	256QAM	Edge_1RB_Left	17.35
n66	30	15	1765	CP	256QAM	Edge_1RB_Right	17.49
n66	30	15	1765	CP	256QAM	Outer_Full	19.62
n66	35	15	1727.5	DFT	QPSK	Inner_Full	24.18
n66	35	15	1727.5	DFT	QPSK	Edge_1RB_Left	24.08
n66	35	15	1727.5	DFT	QPSK	Edge_1RB_Right	24.16
n66	35	15	1727.5	DFT	QPSK	Outer_Full	24.14
n66	35	15	1727.5	DFT	16QAM	Inner_Full	23.14
n66	35	15	1727.5	DFT	16QAM	Edge_1RB_Left	23.19
n66	35	15	1727.5	DFT	16QAM	Edge_1RB_Right	23.25
n66	35	15	1727.5	DFT	16QAM	Outer_Full	23.13
n66	35	15	1727.5	DFT	64QAM	Inner_Full	22.71
n66	35	15	1727.5	DFT	64QAM	Edge_1RB_Left	22.71
n66	35	15	1727.5	DFT	64QAM	Edge_1RB_Right	22.72
n66	35	15	1727.5	DFT	64QAM	Outer_Full	22.71
n66	35	15	1727.5	DFT	256QAM	Inner_Full	21.27
n66	35	15	1727.5	DFT	256QAM	Edge_1RB_Left	21.23
n66	35	15	1727.5	DFT	256QAM	Edge_1RB_Right	21.28
n66	35	15	1727.5	DFT	256QAM	Outer_Full	21.27
n66	35	15	1727.5	CP	QPSK	Inner_Full	22.59
n66	35	15	1727.5	CP	QPSK	Edge_1RB_Left	22.59
n66	35	15	1727.5	CP	QPSK	Edge_1RB_Right	22.57
n66	35	15	1727.5	CP	QPSK	Outer_Full	22.54
n66	35	15	1727.5	CP	16QAM	Inner_Full	22.60
n66	35	15	1727.5	CP	16QAM	Edge_1RB_Left	22.60
n66	35	15	1727.5	CP	16QAM	Edge_1RB_Right	22.59
n66	35	15	1727.5	CP	16QAM	Outer_Full	22.59
n66	35	15	1727.5	CP	64QAM	Inner_Full	22.61
n66	35	15	1727.5	CP	64QAM	Edge_1RB_Left	22.67
n66	35	15	1727.5	CP	64QAM	Edge_1RB_Right	22.68
n66	35	15	1727.5	CP	64QAM	Outer_Full	22.60
n66	35	15	1727.5	CP	256QAM	Inner_Full	20.20
n66	35	15	1727.5	CP	256QAM	Edge_1RB_Left	20.20
n66	35	15	1727.5	CP	256QAM	Edge_1RB_Right	20.19
n66	35	15	1727.5	CP	256QAM	Outer_Full	20.14
n66	35	15	1745	DFT	QPSK	Inner_Full	24.13
n66	35	15	1745	DFT	QPSK	Edge_1RB_Left	24.22
n66	35	15	1745	DFT	QPSK	Edge_1RB_Right	24.12
n66	35	15	1745	DFT	QPSK	Outer_Full	24.16
n66	35	15	1745	DFT	16QAM	Inner_Full	23.19



BAND	BW(MHz)	SCS(kHz)	FREQ(MHz)	OFDM	MODULATION	RB LOCATION	POWER(dBm)
n66	35	15	1745	DFT	16QAM	Edge_1RB_Left	23.16
n66	35	15	1745	DFT	16QAM	Edge_1RB_Right	23.16
n66	35	15	1745	DFT	16QAM	Outer_Full	23.24
n66	35	15	1745	DFT	64QAM	Inner_Full	22.62
n66	35	15	1745	DFT	64QAM	Edge_1RB_Left	22.70
n66	35	15	1745	DFT	64QAM	Edge_1RB_Right	22.63
n66	35	15	1745	DFT	64QAM	Outer_Full	22.70
n66	35	15	1745	DFT	256QAM	Inner_Full	21.10
n66	35	15	1745	DFT	256QAM	Edge_1RB_Left	21.14
n66	35	15	1745	DFT	256QAM	Edge_1RB_Right	21.18
n66	35	15	1745	DFT	256QAM	Outer_Full	21.15
n66	35	15	1745	CP	QPSK	Inner_Full	22.52
n66	35	15	1745	CP	QPSK	Edge_1RB_Left	22.52
n66	35	15	1745	CP	QPSK	Edge_1RB_Right	22.54
n66	35	15	1745	CP	QPSK	Outer_Full	22.54
n66	35	15	1745	CP	16QAM	Inner_Full	22.51
n66	35	15	1745	CP	16QAM	Edge_1RB_Left	22.50
n66	35	15	1745	CP	16QAM	Edge_1RB_Right	22.55
n66	35	15	1745	CP	16QAM	Outer_Full	22.55
n66	35	15	1745	CP	64QAM	Inner_Full	22.56
n66	35	15	1745	CP	64QAM	Edge_1RB_Left	22.58
n66	35	15	1745	CP	64QAM	Edge_1RB_Right	22.64
n66	35	15	1745	CP	64QAM	Outer_Full	22.55
n66	35	15	1745	CP	256QAM	Inner_Full	20.07
n66	35	15	1745	CP	256QAM	Edge_1RB_Left	20.15
n66	35	15	1745	CP	256QAM	Edge_1RB_Right	20.08
n66	35	15	1745	CP	256QAM	Outer_Full	20.10
n66	35	15	1762.5	DFT	QPSK	Inner_Full	24.10
n66	35	15	1762.5	DFT	QPSK	Edge_1RB_Left	24.03
n66	35	15	1762.5	DFT	QPSK	Edge_1RB_Right	24.19
n66	35	15	1762.5	DFT	QPSK	Outer_Full	24.00
n66	35	15	1762.5	DFT	16QAM	Inner_Full	22.94
n66	35	15	1762.5	DFT	16QAM	Edge_1RB_Left	22.82
n66	35	15	1762.5	DFT	16QAM	Edge_1RB_Right	22.93
n66	35	15	1762.5	DFT	16QAM	Outer_Full	22.87
n66	35	15	1762.5	DFT	64QAM	Inner_Full	22.40
n66	35	15	1762.5	DFT	64QAM	Edge_1RB_Left	22.33
n66	35	15	1762.5	DFT	64QAM	Edge_1RB_Right	22.33
n66	35	15	1762.5	DFT	64QAM	Outer_Full	22.40
n66	35	15	1762.5	DFT	256QAM	Inner_Full	20.85
n66	35	15	1762.5	DFT	256QAM	Edge_1RB_Left	20.85



BAND	BW(MHz)	SCS(kHz)	FREQ(MHz)	OFDM	MODULATION	RB LOCATION	POWER(dBm)
n66	35	15	1762.5	DFT	256QAM	Edge_1RB_Right	20.92
n66	35	15	1762.5	DFT	256QAM	Outer_Full	20.89
n66	35	15	1762.5	CP	QPSK	Inner_Full	22.20
n66	35	15	1762.5	CP	QPSK	Edge_1RB_Left	22.23
n66	35	15	1762.5	CP	QPSK	Edge_1RB_Right	22.20
n66	35	15	1762.5	CP	QPSK	Outer_Full	22.18
n66	35	15	1762.5	CP	16QAM	Inner_Full	22.16
n66	35	15	1762.5	CP	16QAM	Edge_1RB_Left	22.16
n66	35	15	1762.5	CP	16QAM	Edge_1RB_Right	22.15
n66	35	15	1762.5	CP	16QAM	Outer_Full	22.21
n66	35	15	1762.5	CP	64QAM	Inner_Full	22.23
n66	35	15	1762.5	CP	64QAM	Edge_1RB_Left	22.29
n66	35	15	1762.5	CP	64QAM	Edge_1RB_Right	22.29
n66	35	15	1762.5	CP	64QAM	Outer_Full	22.28
n66	35	15	1762.5	CP	256QAM	Inner_Full	19.81
n66	35	15	1762.5	CP	256QAM	Edge_1RB_Left	19.82
n66	35	15	1762.5	CP	256QAM	Edge_1RB_Right	19.83
n66	35	15	1762.5	CP	256QAM	Outer_Full	19.83
n66	40	15	1730	DFT	QPSK	Inner_Full	24.22
n66	40	15	1730	DFT	QPSK	Edge_1RB_Left	21.92
n66	40	15	1730	DFT	QPSK	Edge_1RB_Right	22.14
n66	40	15	1730	DFT	QPSK	Outer_Full	24.21
n66	40	15	1730	DFT	16QAM	Inner_Full	24.11
n66	40	15	1730	DFT	16QAM	Edge_1RB_Left	22.18
n66	40	15	1730	DFT	16QAM	Edge_1RB_Right	22.39
n66	40	15	1730	DFT	16QAM	Outer_Full	23.31
n66	40	15	1730	DFT	64QAM	Inner_Full	22.76
n66	40	15	1730	DFT	64QAM	Edge_1RB_Left	21.25
n66	40	15	1730	DFT	64QAM	Edge_1RB_Right	21.50
n66	40	15	1730	DFT	64QAM	Outer_Full	22.67
n66	40	15	1730	DFT	256QAM	Inner_Full	21.17
n66	40	15	1730	DFT	256QAM	Edge_1RB_Left	19.14
n66	40	15	1730	DFT	256QAM	Edge_1RB_Right	19.40
n66	40	15	1730	DFT	256QAM	Outer_Full	21.22
n66	40	15	1730	CP	QPSK	Inner_Full	23.57
n66	40	15	1730	CP	QPSK	Edge_1RB_Left	20.99
n66	40	15	1730	CP	QPSK	Edge_1RB_Right	21.21
n66	40	15	1730	CP	QPSK	Outer_Full	22.58
n66	40	15	1730	CP	16QAM	Inner_Full	23.20
n66	40	15	1730	CP	16QAM	Edge_1RB_Left	21.33
n66	40	15	1730	CP	16QAM	Edge_1RB_Right	21.61



BAND	BW(MHz)	SCS(kHz)	FREQ(MHz)	OFDM	MODULATION	RB LOCATION	POWER(dBm)
n66	40	15	1730	CP	16QAM	Outer_Full	22.57
n66	40	15	1730	CP	64QAM	Inner_Full	22.74
n66	40	15	1730	CP	64QAM	Edge_1RB_Left	20.22
n66	40	15	1730	CP	64QAM	Edge_1RB_Right	20.49
n66	40	15	1730	CP	64QAM	Outer_Full	22.50
n66	40	15	1730	CP	256QAM	Inner_Full	20.22
n66	40	15	1730	CP	256QAM	Edge_1RB_Left	17.21
n66	40	15	1730	CP	256QAM	Edge_1RB_Right	17.41
n66	40	15	1730	CP	256QAM	Outer_Full	20.22
n66	40	15	1745	DFT	QPSK	Inner_Full	24.22
n66	40	15	1745	DFT	QPSK	Edge_1RB_Left	21.90
n66	40	15	1745	DFT	QPSK	Edge_1RB_Right	22.13
n66	40	15	1745	DFT	QPSK	Outer_Full	24.29
n66	40	15	1745	DFT	16QAM	Inner_Full	24.06
n66	40	15	1745	DFT	16QAM	Edge_1RB_Left	22.17
n66	40	15	1745	DFT	16QAM	Edge_1RB_Right	22.33
n66	40	15	1745	DFT	16QAM	Outer_Full	23.09
n66	40	15	1745	DFT	64QAM	Inner_Full	22.48
n66	40	15	1745	DFT	64QAM	Edge_1RB_Left	21.31
n66	40	15	1745	DFT	64QAM	Edge_1RB_Right	21.44
n66	40	15	1745	DFT	64QAM	Outer_Full	22.54
n66	40	15	1745	DFT	256QAM	Inner_Full	20.90
n66	40	15	1745	DFT	256QAM	Edge_1RB_Left	19.10
n66	40	15	1745	DFT	256QAM	Edge_1RB_Right	19.33
n66	40	15	1745	DFT	256QAM	Outer_Full	21.11
n66	40	15	1745	CP	QPSK	Inner_Full	23.32
n66	40	15	1745	CP	QPSK	Edge_1RB_Left	20.93
n66	40	15	1745	CP	QPSK	Edge_1RB_Right	21.16
n66	40	15	1745	CP	QPSK	Outer_Full	22.43
n66	40	15	1745	CP	16QAM	Inner_Full	23.07
n66	40	15	1745	CP	16QAM	Edge_1RB_Left	21.38
n66	40	15	1745	CP	16QAM	Edge_1RB_Right	21.60
n66	40	15	1745	CP	16QAM	Outer_Full	22.41
n66	40	15	1745	CP	64QAM	Inner_Full	22.46
n66	40	15	1745	CP	64QAM	Edge_1RB_Left	20.22
n66	40	15	1745	CP	64QAM	Edge_1RB_Right	20.46
n66	40	15	1745	CP	64QAM	Outer_Full	22.35
n66	40	15	1745	CP	256QAM	Inner_Full	19.96
n66	40	15	1745	CP	256QAM	Edge_1RB_Left	17.22
n66	40	15	1745	CP	256QAM	Edge_1RB_Right	17.48
n66	40	15	1745	CP	256QAM	Outer_Full	20.03



BAND	BW(MHz)	SCS(kHz)	FREQ(MHz)	OFDM	MODULATION	RB LOCATION	POWER(dBm)
n66	40	15	1760	DFT	QPSK	Inner_Full	24.18
n66	40	15	1760	DFT	QPSK	Edge_1RB_Left	22.02
n66	40	15	1760	DFT	QPSK	Edge_1RB_Right	22.00
n66	40	15	1760	DFT	QPSK	Outer_Full	24.03
n66	40	15	1760	DFT	16QAM	Inner_Full	23.58
n66	40	15	1760	DFT	16QAM	Edge_1RB_Left	22.26
n66	40	15	1760	DFT	16QAM	Edge_1RB_Right	22.00
n66	40	15	1760	DFT	16QAM	Outer_Full	22.95
n66	40	15	1760	DFT	64QAM	Inner_Full	22.30
n66	40	15	1760	DFT	64QAM	Edge_1RB_Left	21.36
n66	40	15	1760	DFT	64QAM	Edge_1RB_Right	21.19
n66	40	15	1760	DFT	64QAM	Outer_Full	22.33
n66	40	15	1760	DFT	256QAM	Inner_Full	20.66
n66	40	15	1760	DFT	256QAM	Edge_1RB_Left	19.09
n66	40	15	1760	DFT	256QAM	Edge_1RB_Right	19.21
n66	40	15	1760	DFT	256QAM	Outer_Full	20.95
n66	40	15	1760	CP	QPSK	Inner_Full	23.06
n66	40	15	1760	CP	QPSK	Edge_1RB_Left	20.97
n66	40	15	1760	CP	QPSK	Edge_1RB_Right	21.05
n66	40	15	1760	CP	QPSK	Outer_Full	22.30
n66	40	15	1760	CP	16QAM	Inner_Full	22.49
n66	40	15	1760	CP	16QAM	Edge_1RB_Left	21.39
n66	40	15	1760	CP	16QAM	Edge_1RB_Right	21.53
n66	40	15	1760	CP	16QAM	Outer_Full	22.23
n66	40	15	1760	CP	64QAM	Inner_Full	22.14
n66	40	15	1760	CP	64QAM	Edge_1RB_Left	20.38
n66	40	15	1760	CP	64QAM	Edge_1RB_Right	20.37
n66	40	15	1760	CP	64QAM	Outer_Full	22.11
n66	40	15	1760	CP	256QAM	Inner_Full	19.74
n66	40	15	1760	CP	256QAM	Edge_1RB_Left	17.20
n66	40	15	1760	CP	256QAM	Edge_1RB_Right	17.36
n66	40	15	1760	CP	256QAM	Outer_Full	19.78
n66	45	15	1732.5	DFT	QPSK	Inner_Full	24.32
n66	45	15	1732.5	DFT	QPSK	Edge_1RB_Left	24.40
n66	45	15	1732.5	DFT	QPSK	Edge_1RB_Right	24.28
n66	45	15	1732.5	DFT	QPSK	Outer_Full	24.27
n66	45	15	1732.5	DFT	16QAM	Inner_Full	23.34
n66	45	15	1732.5	DFT	16QAM	Edge_1RB_Left	23.35
n66	45	15	1732.5	DFT	16QAM	Edge_1RB_Right	23.38
n66	45	15	1732.5	DFT	16QAM	Outer_Full	23.38
n66	45	15	1732.5	DFT	64QAM	Inner_Full	22.74



BAND	BW(MHz)	SCS(kHz)	FREQ(MHz)	OFDM	MODULATION	RB LOCATION	POWER(dBm)
n66	45	15	1732.5	DFT	64QAM	Edge_1RB_Left	22.68
n66	45	15	1732.5	DFT	64QAM	Edge_1RB_Right	22.75
n66	45	15	1732.5	DFT	64QAM	Outer_Full	22.74
n66	45	15	1732.5	DFT	256QAM	Inner_Full	21.33
n66	45	15	1732.5	DFT	256QAM	Edge_1RB_Left	21.31
n66	45	15	1732.5	DFT	256QAM	Edge_1RB_Right	21.26
n66	45	15	1732.5	DFT	256QAM	Outer_Full	21.30
n66	45	15	1732.5	CP	QPSK	Inner_Full	22.71
n66	45	15	1732.5	CP	QPSK	Edge_1RB_Left	22.73
n66	45	15	1732.5	CP	QPSK	Edge_1RB_Right	22.69
n66	45	15	1732.5	CP	QPSK	Outer_Full	22.70
n66	45	15	1732.5	CP	16QAM	Inner_Full	22.61
n66	45	15	1732.5	CP	16QAM	Edge_1RB_Left	22.60
n66	45	15	1732.5	CP	16QAM	Edge_1RB_Right	22.59
n66	45	15	1732.5	CP	16QAM	Outer_Full	22.65
n66	45	15	1732.5	CP	64QAM	Inner_Full	22.66
n66	45	15	1732.5	CP	64QAM	Edge_1RB_Left	22.67
n66	45	15	1732.5	CP	64QAM	Edge_1RB_Right	22.66
n66	45	15	1732.5	CP	64QAM	Outer_Full	22.66
n66	45	15	1732.5	CP	256QAM	Inner_Full	20.21
n66	45	15	1732.5	CP	256QAM	Edge_1RB_Left	20.24
n66	45	15	1732.5	CP	256QAM	Edge_1RB_Right	20.24
n66	45	15	1732.5	CP	256QAM	Outer_Full	20.18
n66	45	15	1745	DFT	QPSK	Inner_Full	24.30
n66	45	15	1745	DFT	QPSK	Edge_1RB_Left	24.40
n66	45	15	1745	DFT	QPSK	Edge_1RB_Right	24.32
n66	45	15	1745	DFT	QPSK	Outer_Full	24.37
n66	45	15	1745	DFT	16QAM	Inner_Full	23.33
n66	45	15	1745	DFT	16QAM	Edge_1RB_Left	23.27
n66	45	15	1745	DFT	16QAM	Edge_1RB_Right	23.26
n66	45	15	1745	DFT	16QAM	Outer_Full	23.20
n66	45	15	1745	DFT	64QAM	Inner_Full	22.69
n66	45	15	1745	DFT	64QAM	Edge_1RB_Left	22.64
n66	45	15	1745	DFT	64QAM	Edge_1RB_Right	22.63
n66	45	15	1745	DFT	64QAM	Outer_Full	22.64
n66	45	15	1745	DFT	256QAM	Inner_Full	21.20
n66	45	15	1745	DFT	256QAM	Edge_1RB_Left	21.14
n66	45	15	1745	DFT	256QAM	Edge_1RB_Right	21.12
n66	45	15	1745	DFT	256QAM	Outer_Full	21.18
n66	45	15	1745	CP	QPSK	Inner_Full	22.69
n66	45	15	1745	CP	QPSK	Edge_1RB_Left	22.61



BAND	BW(MHz)	SCS(kHz)	FREQ(MHz)	OFDM	MODULATION	RB LOCATION	POWER(dBm)
n66	45	15	1745	CP	QPSK	Edge_1RB_Right	22.67
n66	45	15	1745	CP	QPSK	Outer_Full	22.58
n66	45	15	1745	CP	16QAM	Inner_Full	22.56
n66	45	15	1745	CP	16QAM	Edge_1RB_Left	22.55
n66	45	15	1745	CP	16QAM	Edge_1RB_Right	22.50
n66	45	15	1745	CP	16QAM	Outer_Full	22.48
n66	45	15	1745	CP	64QAM	Inner_Full	22.62
n66	45	15	1745	CP	64QAM	Edge_1RB_Left	22.55
n66	45	15	1745	CP	64QAM	Edge_1RB_Right	22.55
n66	45	15	1745	CP	64QAM	Outer_Full	22.55
n66	45	15	1745	CP	256QAM	Inner_Full	20.11
n66	45	15	1745	CP	256QAM	Edge_1RB_Left	20.09
n66	45	15	1745	CP	256QAM	Edge_1RB_Right	20.12
n66	45	15	1745	CP	256QAM	Outer_Full	20.12
n66	45	15	1757.5	DFT	QPSK	Inner_Full	24.03
n66	45	15	1757.5	DFT	QPSK	Edge_1RB_Left	23.84
n66	45	15	1757.5	DFT	QPSK	Edge_1RB_Right	23.99
n66	45	15	1757.5	DFT	QPSK	Outer_Full	23.94
n66	45	15	1757.5	DFT	16QAM	Inner_Full	22.93
n66	45	15	1757.5	DFT	16QAM	Edge_1RB_Left	22.99
n66	45	15	1757.5	DFT	16QAM	Edge_1RB_Right	22.93
n66	45	15	1757.5	DFT	16QAM	Outer_Full	22.92
n66	45	15	1757.5	DFT	64QAM	Inner_Full	22.30
n66	45	15	1757.5	DFT	64QAM	Edge_1RB_Left	22.35
n66	45	15	1757.5	DFT	64QAM	Edge_1RB_Right	22.30
n66	45	15	1757.5	DFT	64QAM	Outer_Full	22.36
n66	45	15	1757.5	DFT	256QAM	Inner_Full	20.86
n66	45	15	1757.5	DFT	256QAM	Edge_1RB_Left	20.91
n66	45	15	1757.5	DFT	256QAM	Edge_1RB_Right	20.92
n66	45	15	1757.5	DFT	256QAM	Outer_Full	20.90
n66	45	15	1757.5	CP	QPSK	Inner_Full	22.42
n66	45	15	1757.5	CP	QPSK	Edge_1RB_Left	22.41
n66	45	15	1757.5	CP	QPSK	Edge_1RB_Right	22.45
n66	45	15	1757.5	CP	QPSK	Outer_Full	22.43
n66	45	15	1757.5	CP	16QAM	Inner_Full	22.28
n66	45	15	1757.5	CP	16QAM	Edge_1RB_Left	22.30
n66	45	15	1757.5	CP	16QAM	Edge_1RB_Right	22.29
n66	45	15	1757.5	CP	16QAM	Outer_Full	22.28
n66	45	15	1757.5	CP	64QAM	Inner_Full	22.34
n66	45	15	1757.5	CP	64QAM	Edge_1RB_Left	22.35
n66	45	15	1757.5	CP	64QAM	Edge_1RB_Right	22.29



No.24T04N001537-009-RF NR

BAND	BW(MHz)	SCS(kHz)	FREQ(MHz)	OFDM	MODULATION	RB LOCATION	POWER(dBm)
n66	45	15	1757.5	CP	64QAM	Outer_Full	22.28
n66	45	15	1757.5	CP	256QAM	Inner_Full	19.82
n66	45	15	1757.5	CP	256QAM	Edge_1RB_Left	19.82
n66	45	15	1757.5	CP	256QAM	Edge_1RB_Right	19.81
n66	45	15	1757.5	CP	256QAM	Outer_Full	19.83

Note: Expanded measurement uncertainty is $U = 0.90\text{dB}$, $k = 1.96$



A.1.3 Radiated

A.1.3.1 Description

This is the test for the maximum radiated power from the EUT.

Rule Part 24.232(b) specifies, "Mobile/portable stations are limited to 2 watts e.i.r.p. Peak power" and 24.232(c) specifies that "Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage." Rule Part 22.913(a) specifies "The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts."

Rule Part 27.50(d) specifies "Fixed, mobile, and portable (handheld) stations operating in the 1710–1755 MHz band are limited to 1 watt EIRP".

Rule Part 27.50(h)(2) specifies "Mobile stations are limited to 2.0 watts EIRP".

Rule Part 27.50(c) specifies "Portable stations (hand-held de-vices) are limited to 3 watts ERP".

A.1.3.2 Method of Measurement

ANSI C63.26 chapter 5.2.5.5: when working in decibels (i.e., logarithmic scale), the ERP and EIRP represent the sum of the transmit antenna gain (in dBd or dBi, respectively) and the conducted RF output power (expressed in dB relative to watts or milliwatts).

The relevant equation for determining the maximum ERP or EIRP from the measured RF output power is given in Equation (1) as follows:

$$\text{ERP or EIRP} = \text{PMea} + \text{GT}$$

Where

ERP or EIRP effective radiated power or equivalent isotropically radiated power, respectively (expressed in the same units as PMea, e.g., dBm or dBW)

PMea measured transmitter output power or PSD, in dBm or dBW

GT gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP)

**A.1.3.3 Measurement result****n2**

BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n2	5	15	1852.5	DFT	QPSK	Inner_Full	22.96	21.76	21.96
n2	5	15	1852.5	DFT	QPSK	Edge_1RB_Left	22.15	20.95	21.15
n2	5	15	1852.5	DFT	QPSK	Edge_1RB_Right	22.07	20.87	21.07
n2	5	15	1852.5	DFT	QPSK	Outer_Full	22.56	21.36	21.56
n2	5	15	1852.5	DFT	16QAM	Inner_Full	22.66	21.46	21.66
n2	5	15	1852.5	DFT	16QAM	Edge_1RB_Left	21.30	20.10	20.30
n2	5	15	1852.5	DFT	16QAM	Edge_1RB_Right	22.18	20.98	21.18
n2	5	15	1852.5	DFT	16QAM	Outer_Full	21.58	20.38	20.58
n2	5	15	1852.5	DFT	64QAM	Inner_Full	21.08	19.88	20.08
n2	5	15	1852.5	DFT	64QAM	Edge_1RB_Left	20.69	19.49	19.69
n2	5	15	1852.5	DFT	64QAM	Edge_1RB_Right	21.49	20.29	20.49
n2	5	15	1852.5	DFT	64QAM	Outer_Full	21.07	19.87	20.07
n2	5	15	1852.5	DFT	256QAM	Inner_Full	19.61	18.41	18.61
n2	5	15	1852.5	DFT	256QAM	Edge_1RB_Left	19.14	17.94	18.14
n2	5	15	1852.5	DFT	256QAM	Edge_1RB_Right	19.73	18.53	18.73
n2	5	15	1852.5	DFT	256QAM	Outer_Full	19.66	18.46	18.66
n2	5	15	1852.5	CP	QPSK	Inner_Full	22.10	20.90	21.10
n2	5	15	1852.5	CP	QPSK	Edge_1RB_Left	20.65	19.45	19.65
n2	5	15	1852.5	CP	QPSK	Edge_1RB_Right	21.42	20.22	20.42
n2	5	15	1852.5	CP	QPSK	Outer_Full	21.04	19.84	20.04
n2	5	15	1852.5	CP	16QAM	Inner_Full	21.63	20.43	20.63
n2	5	15	1852.5	CP	16QAM	Edge_1RB_Left	20.63	19.43	19.63
n2	5	15	1852.5	CP	16QAM	Edge_1RB_Right	21.44	20.24	20.44
n2	5	15	1852.5	CP	16QAM	Outer_Full	21.02	19.82	20.02
n2	5	15	1852.5	CP	64QAM	Inner_Full	21.05	19.85	20.05
n2	5	15	1852.5	CP	64QAM	Edge_1RB_Left	20.77	19.57	19.77
n2	5	15	1852.5	CP	64QAM	Edge_1RB_Right	21.47	20.27	20.47
n2	5	15	1852.5	CP	64QAM	Outer_Full	21.05	19.85	20.05



BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n2	5	15	1852.5	CP	256QAM	Inner_Full	18.65	17.45	17.65
n2	5	15	1852.5	CP	256QAM	Edge_1RB_Left	17.93	16.73	16.93
n2	5	15	1852.5	CP	256QAM	Edge_1RB_Right	19.14	17.94	18.14
n2	5	15	1852.5	CP	256QAM	Outer_Full	18.51	17.31	17.51
n2	5	15	1880	DFT	QPSK	Inner_Full	23.02	21.82	22.02
n2	5	15	1880	DFT	QPSK	Edge_1RB_Left	22.11	20.91	21.11
n2	5	15	1880	DFT	QPSK	Edge_1RB_Right	22.07	20.87	21.07
n2	5	15	1880	DFT	QPSK	Outer_Full	22.89	21.69	21.89
n2	5	15	1880	DFT	16QAM	Inner_Full	22.90	21.70	21.90
n2	5	15	1880	DFT	16QAM	Edge_1RB_Left	22.68	21.48	21.68
n2	5	15	1880	DFT	16QAM	Edge_1RB_Right	21.81	20.61	20.81
n2	5	15	1880	DFT	16QAM	Outer_Full	22.27	21.07	21.27
n2	5	15	1880	DFT	64QAM	Inner_Full	22.00	20.80	21.00
n2	5	15	1880	DFT	64QAM	Edge_1RB_Left	21.79	20.59	20.79
n2	5	15	1880	DFT	64QAM	Edge_1RB_Right	21.37	20.17	20.37
n2	5	15	1880	DFT	64QAM	Outer_Full	21.91	20.71	20.91
n2	5	15	1880	DFT	256QAM	Inner_Full	20.44	19.24	19.44
n2	5	15	1880	DFT	256QAM	Edge_1RB_Left	20.20	19.00	19.20
n2	5	15	1880	DFT	256QAM	Edge_1RB_Right	19.73	18.53	18.73
n2	5	15	1880	DFT	256QAM	Outer_Full	20.27	19.07	19.27
n2	5	15	1880	CP	QPSK	Inner_Full	22.81	21.61	21.81
n2	5	15	1880	CP	QPSK	Edge_1RB_Left	21.99	20.79	20.99
n2	5	15	1880	CP	QPSK	Edge_1RB_Right	21.60	20.40	20.60
n2	5	15	1880	CP	QPSK	Outer_Full	21.73	20.53	20.73
n2	5	15	1880	CP	16QAM	Inner_Full	22.53	21.33	21.53
n2	5	15	1880	CP	16QAM	Edge_1RB_Left	21.83	20.63	20.83
n2	5	15	1880	CP	16QAM	Edge_1RB_Right	21.94	20.74	20.94
n2	5	15	1880	CP	16QAM	Outer_Full	21.70	20.50	20.70
n2	5	15	1880	CP	64QAM	Inner_Full	21.86	20.66	20.86
n2	5	15	1880	CP	64QAM	Edge_1RB_Left	21.72	20.52	20.72



BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n2	5	15	1880	CP	64QAM	Edge_1RB_Right	21.37	20.17	20.37
n2	5	15	1880	CP	64QAM	Outer_Full	21.82	20.62	20.82
n2	5	15	1880	CP	256QAM	Inner_Full	19.52	18.32	18.52
n2	5	15	1880	CP	256QAM	Edge_1RB_Left	19.24	18.04	18.24
n2	5	15	1880	CP	256QAM	Edge_1RB_Right	18.84	17.64	17.84
n2	5	15	1880	CP	256QAM	Outer_Full	19.35	18.15	18.35
n2	5	15	1907.5	DFT	QPSK	Inner_Full	23.01	21.81	22.01
n2	5	15	1907.5	DFT	QPSK	Edge_1RB_Left	22.19	20.99	21.19
n2	5	15	1907.5	DFT	QPSK	Edge_1RB_Right	22.09	20.89	21.09
n2	5	15	1907.5	DFT	QPSK	Outer_Full	22.64	21.44	21.64
n2	5	15	1907.5	DFT	16QAM	Inner_Full	22.72	21.52	21.72
n2	5	15	1907.5	DFT	16QAM	Edge_1RB_Left	22.27	21.07	21.27
n2	5	15	1907.5	DFT	16QAM	Edge_1RB_Right	21.65	20.45	20.65
n2	5	15	1907.5	DFT	16QAM	Outer_Full	21.71	20.51	20.71
n2	5	15	1907.5	DFT	64QAM	Inner_Full	21.50	20.30	20.50
n2	5	15	1907.5	DFT	64QAM	Edge_1RB_Left	21.33	20.13	20.33
n2	5	15	1907.5	DFT	64QAM	Edge_1RB_Right	20.76	19.56	19.76
n2	5	15	1907.5	DFT	64QAM	Outer_Full	21.37	20.17	20.37
n2	5	15	1907.5	DFT	256QAM	Inner_Full	19.96	18.76	18.96
n2	5	15	1907.5	DFT	256QAM	Edge_1RB_Left	19.78	18.58	18.78
n2	5	15	1907.5	DFT	256QAM	Edge_1RB_Right	19.20	18.00	18.20
n2	5	15	1907.5	DFT	256QAM	Outer_Full	19.71	18.51	18.71
n2	5	15	1907.5	CP	QPSK	Inner_Full	22.34	21.14	21.34
n2	5	15	1907.5	CP	QPSK	Edge_1RB_Left	21.55	20.35	20.55
n2	5	15	1907.5	CP	QPSK	Edge_1RB_Right	20.96	19.76	19.96
n2	5	15	1907.5	CP	QPSK	Outer_Full	21.18	19.98	20.18
n2	5	15	1907.5	CP	16QAM	Inner_Full	21.96	20.76	20.96
n2	5	15	1907.5	CP	16QAM	Edge_1RB_Left	21.83	20.63	20.83
n2	5	15	1907.5	CP	16QAM	Edge_1RB_Right	21.22	20.02	20.22
n2	5	15	1907.5	CP	16QAM	Outer_Full	21.20	20.00	20.20



BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n2	5	15	1907.5	CP	64QAM	Inner_Full	21.31	20.11	20.31
n2	5	15	1907.5	CP	64QAM	Edge_1RB_Left	21.27	20.07	20.27
n2	5	15	1907.5	CP	64QAM	Edge_1RB_Right	20.63	19.43	19.63
n2	5	15	1907.5	CP	64QAM	Outer_Full	21.28	20.08	20.28
n2	5	15	1907.5	CP	256QAM	Inner_Full	18.96	17.76	17.96
n2	5	15	1907.5	CP	256QAM	Edge_1RB_Left	18.79	17.59	17.79
n2	5	15	1907.5	CP	256QAM	Edge_1RB_Right	18.24	17.04	17.24
n2	5	15	1907.5	CP	256QAM	Outer_Full	18.80	17.60	17.80
n2	10	15	1855	DFT	QPSK	Inner_Full	23.00	21.80	22.00
n2	10	15	1855	DFT	QPSK	Edge_1RB_Left	22.00	20.80	21.00
n2	10	15	1855	DFT	QPSK	Edge_1RB_Right	22.07	20.87	21.07
n2	10	15	1855	DFT	QPSK	Outer_Full	22.80	21.60	21.80
n2	10	15	1855	DFT	16QAM	Inner_Full	22.89	21.69	21.89
n2	10	15	1855	DFT	16QAM	Edge_1RB_Left	21.41	20.21	20.41
n2	10	15	1855	DFT	16QAM	Edge_1RB_Right	23.04	21.84	22.04
n2	10	15	1855	DFT	16QAM	Outer_Full	21.89	20.69	20.89
n2	10	15	1855	DFT	64QAM	Inner_Full	21.72	20.52	20.72
n2	10	15	1855	DFT	64QAM	Edge_1RB_Left	20.47	19.27	19.47
n2	10	15	1855	DFT	64QAM	Edge_1RB_Right	22.66	21.46	21.66
n2	10	15	1855	DFT	64QAM	Outer_Full	21.43	20.23	20.43
n2	10	15	1855	DFT	256QAM	Inner_Full	20.06	18.86	19.06
n2	10	15	1855	DFT	256QAM	Edge_1RB_Left	18.79	17.59	17.79
n2	10	15	1855	DFT	256QAM	Edge_1RB_Right	21.16	19.96	20.16
n2	10	15	1855	DFT	256QAM	Outer_Full	19.92	18.72	18.92
n2	10	15	1855	CP	QPSK	Inner_Full	22.66	21.46	21.66
n2	10	15	1855	CP	QPSK	Edge_1RB_Left	20.62	19.42	19.62
n2	10	15	1855	CP	QPSK	Edge_1RB_Right	22.81	21.61	21.81
n2	10	15	1855	CP	QPSK	Outer_Full	21.43	20.23	20.43
n2	10	15	1855	CP	16QAM	Inner_Full	22.03	20.83	21.03
n2	10	15	1855	CP	16QAM	Edge_1RB_Left	20.96	19.76	19.96



BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n2	10	15	1855	CP	16QAM	Edge_1RB_Right	23.23	22.03	22.23
n2	10	15	1855	CP	16QAM	Outer_Full	21.43	20.23	20.43
n2	10	15	1855	CP	64QAM	Inner_Full	21.63	20.43	20.63
n2	10	15	1855	CP	64QAM	Edge_1RB_Left	20.35	19.15	19.35
n2	10	15	1855	CP	64QAM	Edge_1RB_Right	22.54	21.34	21.54
n2	10	15	1855	CP	64QAM	Outer_Full	21.50	20.30	20.50
n2	10	15	1855	CP	256QAM	Inner_Full	19.03	17.83	18.03
n2	10	15	1855	CP	256QAM	Edge_1RB_Left	17.85	16.65	16.85
n2	10	15	1855	CP	256QAM	Edge_1RB_Right	20.34	19.14	19.34
n2	10	15	1855	CP	256QAM	Outer_Full	18.86	17.66	17.86
n2	10	15	1880	DFT	QPSK	Inner_Full	23.00	21.80	22.00
n2	10	15	1880	DFT	QPSK	Edge_1RB_Left	22.11	20.91	21.11
n2	10	15	1880	DFT	QPSK	Edge_1RB_Right	22.11	20.91	21.11
n2	10	15	1880	DFT	QPSK	Outer_Full	22.84	21.64	21.84
n2	10	15	1880	DFT	16QAM	Inner_Full	22.79	21.59	21.79
n2	10	15	1880	DFT	16QAM	Edge_1RB_Left	22.78	21.58	21.78
n2	10	15	1880	DFT	16QAM	Edge_1RB_Right	22.14	20.94	21.14
n2	10	15	1880	DFT	16QAM	Outer_Full	22.15	20.95	21.15
n2	10	15	1880	DFT	64QAM	Inner_Full	22.01	20.81	21.01
n2	10	15	1880	DFT	64QAM	Edge_1RB_Left	21.98	20.78	20.98
n2	10	15	1880	DFT	64QAM	Edge_1RB_Right	21.22	20.02	20.22
n2	10	15	1880	DFT	64QAM	Outer_Full	21.72	20.52	20.72
n2	10	15	1880	DFT	256QAM	Inner_Full	20.37	19.17	19.37
n2	10	15	1880	DFT	256QAM	Edge_1RB_Left	20.37	19.17	19.37
n2	10	15	1880	DFT	256QAM	Edge_1RB_Right	19.53	18.33	18.53
n2	10	15	1880	DFT	256QAM	Outer_Full	20.29	19.09	19.29
n2	10	15	1880	CP	QPSK	Inner_Full	22.71	21.51	21.71
n2	10	15	1880	CP	QPSK	Edge_1RB_Left	22.16	20.96	21.16
n2	10	15	1880	CP	QPSK	Edge_1RB_Right	21.48	20.28	20.48
n2	10	15	1880	CP	QPSK	Outer_Full	21.67	20.47	20.67



BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n2	10	15	1880	CP	16QAM	Inner_Full	22.40	21.20	21.40
n2	10	15	1880	CP	16QAM	Edge_1RB_Left	22.43	21.23	21.43
n2	10	15	1880	CP	16QAM	Edge_1RB_Right	21.78	20.58	20.78
n2	10	15	1880	CP	16QAM	Outer_Full	21.70	20.50	20.70
n2	10	15	1880	CP	64QAM	Inner_Full	21.89	20.69	20.89
n2	10	15	1880	CP	64QAM	Edge_1RB_Left	21.82	20.62	20.82
n2	10	15	1880	CP	64QAM	Edge_1RB_Right	21.15	19.95	20.15
n2	10	15	1880	CP	64QAM	Outer_Full	21.78	20.58	20.78
n2	10	15	1880	CP	256QAM	Inner_Full	19.46	18.26	18.46
n2	10	15	1880	CP	256QAM	Edge_1RB_Left	19.45	18.25	18.45
n2	10	15	1880	CP	256QAM	Edge_1RB_Right	18.68	17.48	17.68
n2	10	15	1880	CP	256QAM	Outer_Full	19.26	18.06	18.26
n2	10	15	1905	DFT	QPSK	Inner_Full	23.07	21.87	22.07
n2	10	15	1905	DFT	QPSK	Edge_1RB_Left	22.10	20.90	21.10
n2	10	15	1905	DFT	QPSK	Edge_1RB_Right	22.10	20.90	21.10
n2	10	15	1905	DFT	QPSK	Outer_Full	22.67	21.47	21.67
n2	10	15	1905	DFT	16QAM	Inner_Full	22.82	21.62	21.82
n2	10	15	1905	DFT	16QAM	Edge_1RB_Left	22.47	21.27	21.47
n2	10	15	1905	DFT	16QAM	Edge_1RB_Right	21.81	20.61	20.81
n2	10	15	1905	DFT	16QAM	Outer_Full	21.82	20.62	20.82
n2	10	15	1905	DFT	64QAM	Inner_Full	21.78	20.58	20.78
n2	10	15	1905	DFT	64QAM	Edge_1RB_Left	21.62	20.42	20.62
n2	10	15	1905	DFT	64QAM	Edge_1RB_Right	20.98	19.78	19.98
n2	10	15	1905	DFT	64QAM	Outer_Full	21.38	20.18	20.38
n2	10	15	1905	DFT	256QAM	Inner_Full	20.19	18.99	19.19
n2	10	15	1905	DFT	256QAM	Edge_1RB_Left	19.80	18.60	18.80
n2	10	15	1905	DFT	256QAM	Edge_1RB_Right	19.10	17.90	18.10
n2	10	15	1905	DFT	256QAM	Outer_Full	19.93	18.73	18.93
n2	10	15	1905	CP	QPSK	Inner_Full	22.63	21.43	21.63
n2	10	15	1905	CP	QPSK	Edge_1RB_Left	21.73	20.53	20.73



BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n2	10	15	1905	CP	QPSK	Edge_1RB_Right	21.11	19.91	20.11
n2	10	15	1905	CP	QPSK	Outer_Full	21.37	20.17	20.37
n2	10	15	1905	CP	16QAM	Inner_Full	22.11	20.91	21.11
n2	10	15	1905	CP	16QAM	Edge_1RB_Left	22.02	20.82	21.02
n2	10	15	1905	CP	16QAM	Edge_1RB_Right	21.40	20.20	20.40
n2	10	15	1905	CP	16QAM	Outer_Full	21.36	20.16	20.36
n2	10	15	1905	CP	64QAM	Inner_Full	21.70	20.50	20.70
n2	10	15	1905	CP	64QAM	Edge_1RB_Left	21.44	20.24	20.44
n2	10	15	1905	CP	64QAM	Edge_1RB_Right	20.86	19.66	19.86
n2	10	15	1905	CP	64QAM	Outer_Full	21.42	20.22	20.42
n2	10	15	1905	CP	256QAM	Inner_Full	19.22	18.02	18.22
n2	10	15	1905	CP	256QAM	Edge_1RB_Left	18.92	17.72	17.92
n2	10	15	1905	CP	256QAM	Edge_1RB_Right	18.26	17.06	17.26
n2	10	15	1905	CP	256QAM	Outer_Full	18.95	17.75	17.95
n2	15	15	1857.5	DFT	QPSK	Inner_Full	23.04	21.84	22.04
n2	15	15	1857.5	DFT	QPSK	Edge_1RB_Left	21.87	20.67	20.87
n2	15	15	1857.5	DFT	QPSK	Edge_1RB_Right	22.13	20.93	21.13
n2	15	15	1857.5	DFT	QPSK	Outer_Full	22.99	21.79	21.99
n2	15	15	1857.5	DFT	16QAM	Inner_Full	22.67	21.47	21.67
n2	15	15	1857.5	DFT	16QAM	Edge_1RB_Left	21.02	19.82	20.02
n2	15	15	1857.5	DFT	16QAM	Edge_1RB_Right	23.03	21.83	22.03
n2	15	15	1857.5	DFT	16QAM	Outer_Full	22.29	21.09	21.29
n2	15	15	1857.5	DFT	64QAM	Inner_Full	21.87	20.67	20.87
n2	15	15	1857.5	DFT	64QAM	Edge_1RB_Left	20.25	19.05	19.25
n2	15	15	1857.5	DFT	64QAM	Edge_1RB_Right	22.71	21.51	21.71
n2	15	15	1857.5	DFT	64QAM	Outer_Full	21.72	20.52	20.72
n2	15	15	1857.5	DFT	256QAM	Inner_Full	20.46	19.26	19.46
n2	15	15	1857.5	DFT	256QAM	Edge_1RB_Left	18.49	17.29	17.49
n2	15	15	1857.5	DFT	256QAM	Edge_1RB_Right	21.31	20.11	20.31
n2	15	15	1857.5	DFT	256QAM	Outer_Full	20.15	18.95	19.15



BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n2	15	15	1857.5	CP	QPSK	Inner_Full	22.83	21.63	21.83
n2	15	15	1857.5	CP	QPSK	Edge_1RB_Left	20.20	19.00	19.20
n2	15	15	1857.5	CP	QPSK	Edge_1RB_Right	22.84	21.64	21.84
n2	15	15	1857.5	CP	QPSK	Outer_Full	21.76	20.56	20.76
n2	15	15	1857.5	CP	16QAM	Inner_Full	22.38	21.18	21.38
n2	15	15	1857.5	CP	16QAM	Edge_1RB_Left	20.55	19.35	19.55
n2	15	15	1857.5	CP	16QAM	Edge_1RB_Right	23.27	22.07	22.27
n2	15	15	1857.5	CP	16QAM	Outer_Full	21.73	20.53	20.73
n2	15	15	1857.5	CP	64QAM	Inner_Full	22.35	21.15	21.35
n2	15	15	1857.5	CP	64QAM	Edge_1RB_Left	19.89	18.69	18.89
n2	15	15	1857.5	CP	64QAM	Edge_1RB_Right	22.49	21.29	21.49
n2	15	15	1857.5	CP	64QAM	Outer_Full	21.71	20.51	20.71
n2	15	15	1857.5	CP	256QAM	Inner_Full	19.43	18.23	18.43
n2	15	15	1857.5	CP	256QAM	Edge_1RB_Left	17.38	16.18	16.38
n2	15	15	1857.5	CP	256QAM	Edge_1RB_Right	20.33	19.13	19.33
n2	15	15	1857.5	CP	256QAM	Outer_Full	19.18	17.98	18.18
n2	15	15	1880	DFT	QPSK	Inner_Full	23.06	21.86	22.06
n2	15	15	1880	DFT	QPSK	Edge_1RB_Left	22.19	20.99	21.19
n2	15	15	1880	DFT	QPSK	Edge_1RB_Right	22.19	20.99	21.19
n2	15	15	1880	DFT	QPSK	Outer_Full	22.87	21.67	21.87
n2	15	15	1880	DFT	16QAM	Inner_Full	22.80	21.60	21.80
n2	15	15	1880	DFT	16QAM	Edge_1RB_Left	23.05	21.85	22.05
n2	15	15	1880	DFT	16QAM	Edge_1RB_Right	22.13	20.93	21.13
n2	15	15	1880	DFT	16QAM	Outer_Full	22.28	21.08	21.28
n2	15	15	1880	DFT	64QAM	Inner_Full	22.02	20.82	21.02
n2	15	15	1880	DFT	64QAM	Edge_1RB_Left	22.25	21.05	21.25
n2	15	15	1880	DFT	64QAM	Edge_1RB_Right	21.30	20.10	20.30
n2	15	15	1880	DFT	64QAM	Outer_Full	21.88	20.68	20.88
n2	15	15	1880	DFT	256QAM	Inner_Full	20.47	19.27	19.47
n2	15	15	1880	DFT	256QAM	Edge_1RB_Left	20.71	19.51	19.71



BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n2	15	15	1880	DFT	256QAM	Edge_1RB_Right	19.52	18.32	18.52
n2	15	15	1880	DFT	256QAM	Outer_Full	20.36	19.16	19.36
n2	15	15	1880	CP	QPSK	Inner_Full	22.75	21.55	21.75
n2	15	15	1880	CP	QPSK	Edge_1RB_Left	22.38	21.18	21.38
n2	15	15	1880	CP	QPSK	Edge_1RB_Right	21.33	20.13	20.33
n2	15	15	1880	CP	QPSK	Outer_Full	21.82	20.62	20.82
n2	15	15	1880	CP	16QAM	Inner_Full	22.31	21.11	21.31
n2	15	15	1880	CP	16QAM	Edge_1RB_Left	22.76	21.56	21.76
n2	15	15	1880	CP	16QAM	Edge_1RB_Right	21.76	20.56	20.76
n2	15	15	1880	CP	16QAM	Outer_Full	21.79	20.59	20.79
n2	15	15	1880	CP	64QAM	Inner_Full	21.75	20.55	20.75
n2	15	15	1880	CP	64QAM	Edge_1RB_Left	22.17	20.97	21.17
n2	15	15	1880	CP	64QAM	Edge_1RB_Right	21.14	19.94	20.14
n2	15	15	1880	CP	64QAM	Outer_Full	21.82	20.62	20.82
n2	15	15	1880	CP	256QAM	Inner_Full	19.52	18.32	18.52
n2	15	15	1880	CP	256QAM	Edge_1RB_Left	19.78	18.58	18.78
n2	15	15	1880	CP	256QAM	Edge_1RB_Right	18.60	17.40	17.60
n2	15	15	1880	CP	256QAM	Outer_Full	19.34	18.14	18.34
n2	15	15	1902.5	DFT	QPSK	Inner_Full	23.03	21.83	22.03
n2	15	15	1902.5	DFT	QPSK	Edge_1RB_Left	22.18	20.98	21.18
n2	15	15	1902.5	DFT	QPSK	Edge_1RB_Right	22.18	20.98	21.18
n2	15	15	1902.5	DFT	QPSK	Outer_Full	22.76	21.56	21.76
n2	15	15	1902.5	DFT	16QAM	Inner_Full	22.71	21.51	21.71
n2	15	15	1902.5	DFT	16QAM	Edge_1RB_Left	22.31	21.11	21.31
n2	15	15	1902.5	DFT	16QAM	Edge_1RB_Right	21.94	20.74	20.94
n2	15	15	1902.5	DFT	16QAM	Outer_Full	21.97	20.77	20.97
n2	15	15	1902.5	DFT	64QAM	Inner_Full	21.85	20.65	20.85
n2	15	15	1902.5	DFT	64QAM	Edge_1RB_Left	21.42	20.22	20.42
n2	15	15	1902.5	DFT	64QAM	Edge_1RB_Right	21.09	19.89	20.09
n2	15	15	1902.5	DFT	64QAM	Outer_Full	21.56	20.36	20.56



BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n2	15	15	1902.5	DFT	256QAM	Inner_Full	20.35	19.15	19.35
n2	15	15	1902.5	DFT	256QAM	Edge_1RB_Left	19.79	18.59	18.79
n2	15	15	1902.5	DFT	256QAM	Edge_1RB_Right	19.33	18.13	18.33
n2	15	15	1902.5	DFT	256QAM	Outer_Full	20.01	18.81	19.01
n2	15	15	1902.5	CP	QPSK	Inner_Full	22.58	21.38	21.58
n2	15	15	1902.5	CP	QPSK	Edge_1RB_Left	21.45	20.25	20.45
n2	15	15	1902.5	CP	QPSK	Edge_1RB_Right	21.14	19.94	20.14
n2	15	15	1902.5	CP	QPSK	Outer_Full	21.52	20.32	20.52
n2	15	15	1902.5	CP	16QAM	Inner_Full	22.16	20.96	21.16
n2	15	15	1902.5	CP	16QAM	Edge_1RB_Left	21.87	20.67	20.87
n2	15	15	1902.5	CP	16QAM	Edge_1RB_Right	21.52	20.32	20.52
n2	15	15	1902.5	CP	16QAM	Outer_Full	21.50	20.30	20.50
n2	15	15	1902.5	CP	64QAM	Inner_Full	21.75	20.55	20.75
n2	15	15	1902.5	CP	64QAM	Edge_1RB_Left	21.28	20.08	20.28
n2	15	15	1902.5	CP	64QAM	Edge_1RB_Right	20.97	19.77	19.97
n2	15	15	1902.5	CP	64QAM	Outer_Full	21.48	20.28	20.48
n2	15	15	1902.5	CP	256QAM	Inner_Full	19.26	18.06	18.26
n2	15	15	1902.5	CP	256QAM	Edge_1RB_Left	18.89	17.69	17.89
n2	15	15	1902.5	CP	256QAM	Edge_1RB_Right	18.50	17.30	17.50
n2	15	15	1902.5	CP	256QAM	Outer_Full	19.03	17.83	18.03
n2	20	15	1860	DFT	QPSK	Inner_Full	22.93	21.73	21.93
n2	20	15	1860	DFT	QPSK	Edge_1RB_Left	21.42	20.22	20.42
n2	20	15	1860	DFT	QPSK	Edge_1RB_Right	22.27	21.07	21.27
n2	20	15	1860	DFT	QPSK	Outer_Full	22.98	21.78	21.98
n2	20	15	1860	DFT	16QAM	Inner_Full	22.77	21.57	21.77
n2	20	15	1860	DFT	16QAM	Edge_1RB_Left	20.73	19.53	19.73
n2	20	15	1860	DFT	16QAM	Edge_1RB_Right	23.11	21.91	22.11
n2	20	15	1860	DFT	16QAM	Outer_Full	22.25	21.05	21.25
n2	20	15	1860	DFT	64QAM	Inner_Full	22.38	21.18	21.38
n2	20	15	1860	DFT	64QAM	Edge_1RB_Left	19.75	18.55	18.75



BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n2	20	15	1860	DFT	64QAM	Edge_1RB_Right	22.30	21.10	21.30
n2	20	15	1860	DFT	64QAM	Outer_Full	21.72	20.52	20.72
n2	20	15	1860	DFT	256QAM	Inner_Full	20.45	19.25	19.45
n2	20	15	1860	DFT	256QAM	Edge_1RB_Left	17.82	16.62	16.82
n2	20	15	1860	DFT	256QAM	Edge_1RB_Right	20.65	19.45	19.65
n2	20	15	1860	DFT	256QAM	Outer_Full	20.13	18.93	19.13
n2	20	15	1860	CP	QPSK	Inner_Full	22.90	21.70	21.90
n2	20	15	1860	CP	QPSK	Edge_1RB_Left	19.90	18.70	18.90
n2	20	15	1860	CP	QPSK	Edge_1RB_Right	22.56	21.36	21.56
n2	20	15	1860	CP	QPSK	Outer_Full	21.75	20.55	20.75
n2	20	15	1860	CP	16QAM	Inner_Full	22.54	21.34	21.54
n2	20	15	1860	CP	16QAM	Edge_1RB_Left	20.20	19.00	19.20
n2	20	15	1860	CP	16QAM	Edge_1RB_Right	22.85	21.65	21.85
n2	20	15	1860	CP	16QAM	Outer_Full	21.71	20.51	20.71
n2	20	15	1860	CP	64QAM	Inner_Full	22.18	20.98	21.18
n2	20	15	1860	CP	64QAM	Edge_1RB_Left	19.72	18.52	18.72
n2	20	15	1860	CP	64QAM	Edge_1RB_Right	22.34	21.14	21.34
n2	20	15	1860	CP	64QAM	Outer_Full	21.75	20.55	20.75
n2	20	15	1860	CP	256QAM	Inner_Full	19.98	18.78	18.98
n2	20	15	1860	CP	256QAM	Edge_1RB_Left	16.90	15.70	15.90
n2	20	15	1860	CP	256QAM	Edge_1RB_Right	19.81	18.61	18.81
n2	20	15	1860	CP	256QAM	Outer_Full	19.29	18.09	18.29
n2	20	15	1880	DFT	QPSK	Inner_Full	22.96	21.76	21.96
n2	20	15	1880	DFT	QPSK	Edge_1RB_Left	22.20	21.00	21.20
n2	20	15	1880	DFT	QPSK	Edge_1RB_Right	22.19	20.99	21.19
n2	20	15	1880	DFT	QPSK	Outer_Full	23.00	21.80	22.00
n2	20	15	1880	DFT	16QAM	Inner_Full	22.82	21.62	21.82
n2	20	15	1880	DFT	16QAM	Edge_1RB_Left	23.09	21.89	22.09
n2	20	15	1880	DFT	16QAM	Edge_1RB_Right	22.21	21.01	21.21
n2	20	15	1880	DFT	16QAM	Outer_Full	22.35	21.15	21.35



BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n2	20	15	1880	DFT	64QAM	Inner_Full	21.66	20.46	20.66
n2	20	15	1880	DFT	64QAM	Edge_1RB_Left	22.35	21.15	21.35
n2	20	15	1880	DFT	64QAM	Edge_1RB_Right	21.20	20.00	20.20
n2	20	15	1880	DFT	64QAM	Outer_Full	21.83	20.63	20.83
n2	20	15	1880	DFT	256QAM	Inner_Full	20.44	19.24	19.44
n2	20	15	1880	DFT	256QAM	Edge_1RB_Left	20.83	19.63	19.83
n2	20	15	1880	DFT	256QAM	Edge_1RB_Right	19.31	18.11	18.31
n2	20	15	1880	DFT	256QAM	Outer_Full	20.29	19.09	19.29
n2	20	15	1880	CP	QPSK	Inner_Full	22.78	21.58	21.78
n2	20	15	1880	CP	QPSK	Edge_1RB_Left	22.47	21.27	21.47
n2	20	15	1880	CP	QPSK	Edge_1RB_Right	21.42	20.22	20.42
n2	20	15	1880	CP	QPSK	Outer_Full	21.72	20.52	20.72
n2	20	15	1880	CP	16QAM	Inner_Full	22.12	20.92	21.12
n2	20	15	1880	CP	16QAM	Edge_1RB_Left	22.91	21.71	21.91
n2	20	15	1880	CP	16QAM	Edge_1RB_Right	21.76	20.56	20.76
n2	20	15	1880	CP	16QAM	Outer_Full	21.68	20.48	20.68
n2	20	15	1880	CP	64QAM	Inner_Full	21.89	20.69	20.89
n2	20	15	1880	CP	64QAM	Edge_1RB_Left	22.34	21.14	21.34
n2	20	15	1880	CP	64QAM	Edge_1RB_Right	21.21	20.01	20.21
n2	20	15	1880	CP	64QAM	Outer_Full	21.81	20.61	20.81
n2	20	15	1880	CP	256QAM	Inner_Full	19.43	18.23	18.43
n2	20	15	1880	CP	256QAM	Edge_1RB_Left	20.05	18.85	19.05
n2	20	15	1880	CP	256QAM	Edge_1RB_Right	18.68	17.48	17.68
n2	20	15	1880	CP	256QAM	Outer_Full	19.31	18.11	18.31
n2	20	15	1900	DFT	QPSK	Inner_Full	23.01	21.81	22.01
n2	20	15	1900	DFT	QPSK	Edge_1RB_Left	22.13	20.93	21.13
n2	20	15	1900	DFT	QPSK	Edge_1RB_Right	22.11	20.91	21.11
n2	20	15	1900	DFT	QPSK	Outer_Full	22.70	21.50	21.70
n2	20	15	1900	DFT	16QAM	Inner_Full	22.69	21.49	21.69
n2	20	15	1900	DFT	16QAM	Edge_1RB_Left	22.16	20.96	21.16



BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n2	20	15	1900	DFT	16QAM	Edge_1RB_Right	21.89	20.69	20.89
n2	20	15	1900	DFT	16QAM	Outer_Full	21.99	20.79	20.99
n2	20	15	1900	DFT	64QAM	Inner_Full	21.73	20.53	20.73
n2	20	15	1900	DFT	64QAM	Edge_1RB_Left	21.28	20.08	20.28
n2	20	15	1900	DFT	64QAM	Edge_1RB_Right	21.06	19.86	20.06
n2	20	15	1900	DFT	64QAM	Outer_Full	21.52	20.32	20.52
n2	20	15	1900	DFT	256QAM	Inner_Full	20.17	18.97	19.17
n2	20	15	1900	DFT	256QAM	Edge_1RB_Left	19.75	18.55	18.75
n2	20	15	1900	DFT	256QAM	Edge_1RB_Right	19.33	18.13	18.33
n2	20	15	1900	DFT	256QAM	Outer_Full	19.96	18.76	18.96
n2	20	15	1900	CP	QPSK	Inner_Full	22.64	21.44	21.64
n2	20	15	1900	CP	QPSK	Edge_1RB_Left	21.42	20.22	20.42
n2	20	15	1900	CP	QPSK	Edge_1RB_Right	21.24	20.04	20.24
n2	20	15	1900	CP	QPSK	Outer_Full	21.41	20.21	20.41
n2	20	15	1900	CP	16QAM	Inner_Full	22.09	20.89	21.09
n2	20	15	1900	CP	16QAM	Edge_1RB_Left	21.73	20.53	20.73
n2	20	15	1900	CP	16QAM	Edge_1RB_Right	21.53	20.33	20.53
n2	20	15	1900	CP	16QAM	Outer_Full	21.41	20.21	20.41
n2	20	15	1900	CP	64QAM	Inner_Full	21.70	20.50	20.70
n2	20	15	1900	CP	64QAM	Edge_1RB_Left	21.21	20.01	20.21
n2	20	15	1900	CP	64QAM	Edge_1RB_Right	21.03	19.83	20.03
n2	20	15	1900	CP	64QAM	Outer_Full	21.46	20.26	20.46
n2	20	15	1900	CP	256QAM	Inner_Full	19.24	18.04	18.24
n2	20	15	1900	CP	256QAM	Edge_1RB_Left	18.79	17.59	17.79
n2	20	15	1900	CP	256QAM	Edge_1RB_Right	18.52	17.32	17.52
n2	20	15	1900	CP	256QAM	Outer_Full	19.08	17.88	18.08
n2	25	15	1862.5	DFT	QPSK	Inner_Full	23.12	21.92	22.12
n2	25	15	1862.5	DFT	QPSK	Edge_1RB_Left	22.22	21.02	21.22
n2	25	15	1862.5	DFT	QPSK	Edge_1RB_Right	22.45	21.25	21.45
n2	25	15	1862.5	DFT	QPSK	Outer_Full	23.06	21.86	22.06



BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n2	25	15	1862.5	DFT	16QAM	Inner_Full	22.90	21.70	21.90
n2	25	15	1862.5	DFT	16QAM	Edge_1RB_Left	21.53	20.33	20.53
n2	25	15	1862.5	DFT	16QAM	Edge_1RB_Right	22.94	21.74	21.94
n2	25	15	1862.5	DFT	16QAM	Outer_Full	22.36	21.16	21.36
n2	25	15	1862.5	DFT	64QAM	Inner_Full	22.03	20.83	21.03
n2	25	15	1862.5	DFT	64QAM	Edge_1RB_Left	20.71	19.51	19.71
n2	25	15	1862.5	DFT	64QAM	Edge_1RB_Right	22.19	20.99	21.19
n2	25	15	1862.5	DFT	64QAM	Outer_Full	21.81	20.61	20.81
n2	25	15	1862.5	DFT	256QAM	Inner_Full	20.37	19.17	19.37
n2	25	15	1862.5	DFT	256QAM	Edge_1RB_Left	18.99	17.79	17.99
n2	25	15	1862.5	DFT	256QAM	Edge_1RB_Right	20.49	19.29	19.49
n2	25	15	1862.5	DFT	256QAM	Outer_Full	20.27	19.07	19.27
n2	25	15	1862.5	CP	QPSK	Inner_Full	23.11	21.91	22.11
n2	25	15	1862.5	CP	QPSK	Edge_1RB_Left	20.92	19.72	19.92
n2	25	15	1862.5	CP	QPSK	Edge_1RB_Right	22.36	21.16	21.36
n2	25	15	1862.5	CP	QPSK	Outer_Full	21.87	20.67	20.87
n2	25	15	1862.5	CP	16QAM	Inner_Full	22.60	21.40	21.60
n2	25	15	1862.5	CP	16QAM	Edge_1RB_Left	21.31	20.11	20.31
n2	25	15	1862.5	CP	16QAM	Edge_1RB_Right	22.81	21.61	21.81
n2	25	15	1862.5	CP	16QAM	Outer_Full	21.94	20.74	20.94
n2	25	15	1862.5	CP	64QAM	Inner_Full	22.23	21.03	21.23
n2	25	15	1862.5	CP	64QAM	Edge_1RB_Left	20.68	19.48	19.68
n2	25	15	1862.5	CP	64QAM	Edge_1RB_Right	22.14	20.94	21.14
n2	25	15	1862.5	CP	64QAM	Outer_Full	21.90	20.70	20.90
n2	25	15	1862.5	CP	256QAM	Inner_Full	19.67	18.47	18.67
n2	25	15	1862.5	CP	256QAM	Edge_1RB_Left	18.04	16.84	17.04
n2	25	15	1862.5	CP	256QAM	Edge_1RB_Right	19.62	18.42	18.62
n2	25	15	1862.5	CP	256QAM	Outer_Full	19.34	18.14	18.34
n2	25	15	1880	DFT	QPSK	Inner_Full	23.16	21.96	22.16
n2	25	15	1880	DFT	QPSK	Edge_1RB_Left	22.30	21.10	21.30



BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n2	25	15	1880	DFT	QPSK	Edge_1RB_Right	22.43	21.23	21.43
n2	25	15	1880	DFT	QPSK	Outer_Full	23.02	21.82	22.02
n2	25	15	1880	DFT	16QAM	Inner_Full	22.97	21.77	21.97
n2	25	15	1880	DFT	16QAM	Edge_1RB_Left	22.61	21.41	21.61
n2	25	15	1880	DFT	16QAM	Edge_1RB_Right	22.43	21.23	21.43
n2	25	15	1880	DFT	16QAM	Outer_Full	22.29	21.09	21.29
n2	25	15	1880	DFT	64QAM	Inner_Full	21.94	20.74	20.94
n2	25	15	1880	DFT	64QAM	Edge_1RB_Left	21.73	20.53	20.73
n2	25	15	1880	DFT	64QAM	Edge_1RB_Right	21.58	20.38	20.58
n2	25	15	1880	DFT	64QAM	Outer_Full	21.69	20.49	20.69
n2	25	15	1880	DFT	256QAM	Inner_Full	20.34	19.14	19.34
n2	25	15	1880	DFT	256QAM	Edge_1RB_Left	20.16	18.96	19.16
n2	25	15	1880	DFT	256QAM	Edge_1RB_Right	19.84	18.64	18.84
n2	25	15	1880	DFT	256QAM	Outer_Full	20.36	19.16	19.36
n2	25	15	1880	CP	QPSK	Inner_Full	22.69	21.49	21.69
n2	25	15	1880	CP	QPSK	Edge_1RB_Left	21.94	20.74	20.94
n2	25	15	1880	CP	QPSK	Edge_1RB_Right	21.60	20.40	20.60
n2	25	15	1880	CP	QPSK	Outer_Full	21.84	20.64	20.84
n2	25	15	1880	CP	16QAM	Inner_Full	22.33	21.13	21.33
n2	25	15	1880	CP	16QAM	Edge_1RB_Left	22.49	21.29	21.49
n2	25	15	1880	CP	16QAM	Edge_1RB_Right	22.09	20.89	21.09
n2	25	15	1880	CP	16QAM	Outer_Full	21.88	20.68	20.88
n2	25	15	1880	CP	64QAM	Inner_Full	21.90	20.70	20.90
n2	25	15	1880	CP	64QAM	Edge_1RB_Left	21.81	20.61	20.81
n2	25	15	1880	CP	64QAM	Edge_1RB_Right	21.50	20.30	20.50
n2	25	15	1880	CP	64QAM	Outer_Full	21.83	20.63	20.83
n2	25	15	1880	CP	256QAM	Inner_Full	19.45	18.25	18.45
n2	25	15	1880	CP	256QAM	Edge_1RB_Left	19.31	18.11	18.31
n2	25	15	1880	CP	256QAM	Edge_1RB_Right	18.98	17.78	17.98
n2	25	15	1880	CP	256QAM	Outer_Full	19.42	18.22	18.42



BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n2	25	15	1897.5	DFT	QPSK	Inner_Full	23.18	21.98	22.18
n2	25	15	1897.5	DFT	QPSK	Edge_1RB_Left	22.43	21.23	21.43
n2	25	15	1897.5	DFT	QPSK	Edge_1RB_Right	22.40	21.20	21.40
n2	25	15	1897.5	DFT	QPSK	Outer_Full	22.82	21.62	21.82
n2	25	15	1897.5	DFT	16QAM	Inner_Full	22.91	21.71	21.91
n2	25	15	1897.5	DFT	16QAM	Edge_1RB_Left	22.49	21.29	21.49
n2	25	15	1897.5	DFT	16QAM	Edge_1RB_Right	21.81	20.61	20.81
n2	25	15	1897.5	DFT	16QAM	Outer_Full	21.99	20.79	20.99
n2	25	15	1897.5	DFT	64QAM	Inner_Full	21.72	20.52	20.72
n2	25	15	1897.5	DFT	64QAM	Edge_1RB_Left	21.67	20.47	20.67
n2	25	15	1897.5	DFT	64QAM	Edge_1RB_Right	20.97	19.77	19.97
n2	25	15	1897.5	DFT	64QAM	Outer_Full	21.49	20.29	20.49
n2	25	15	1897.5	DFT	256QAM	Inner_Full	20.10	18.90	19.10
n2	25	15	1897.5	DFT	256QAM	Edge_1RB_Left	20.18	18.98	19.18
n2	25	15	1897.5	DFT	256QAM	Edge_1RB_Right	19.32	18.12	18.32
n2	25	15	1897.5	DFT	256QAM	Outer_Full	20.13	18.93	19.13
n2	25	15	1897.5	CP	QPSK	Inner_Full	22.60	21.40	21.60
n2	25	15	1897.5	CP	QPSK	Edge_1RB_Left	21.88	20.68	20.88
n2	25	15	1897.5	CP	QPSK	Edge_1RB_Right	21.16	19.96	20.16
n2	25	15	1897.5	CP	QPSK	Outer_Full	21.61	20.41	20.61
n2	25	15	1897.5	CP	16QAM	Inner_Full	22.07	20.87	21.07
n2	25	15	1897.5	CP	16QAM	Edge_1RB_Left	22.19	20.99	21.19
n2	25	15	1897.5	CP	16QAM	Edge_1RB_Right	21.51	20.31	20.51
n2	25	15	1897.5	CP	16QAM	Outer_Full	21.62	20.42	20.62
n2	25	15	1897.5	CP	64QAM	Inner_Full	21.78	20.58	20.78
n2	25	15	1897.5	CP	64QAM	Edge_1RB_Left	21.66	20.46	20.66
n2	25	15	1897.5	CP	64QAM	Edge_1RB_Right	20.99	19.79	19.99
n2	25	15	1897.5	CP	64QAM	Outer_Full	21.59	20.39	20.59
n2	25	15	1897.5	CP	256QAM	Inner_Full	19.13	17.93	18.13
n2	25	15	1897.5	CP	256QAM	Edge_1RB_Left	19.29	18.09	18.29



BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n2	25	15	1897.5	CP	256QAM	Edge_1RB_Right	18.48	17.28	17.48
n2	25	15	1897.5	CP	256QAM	Outer_Full	19.12	17.92	18.12
n2	30	15	1865	DFT	QPSK	Inner_Full	23.10	21.90	22.10
n2	30	15	1865	DFT	QPSK	Edge_1RB_Left	22.21	21.01	21.21
n2	30	15	1865	DFT	QPSK	Edge_1RB_Right	22.35	21.15	21.35
n2	30	15	1865	DFT	QPSK	Outer_Full	23.00	21.80	22.00
n2	30	15	1865	DFT	16QAM	Inner_Full	22.88	21.68	21.88
n2	30	15	1865	DFT	16QAM	Edge_1RB_Left	21.49	20.29	20.49
n2	30	15	1865	DFT	16QAM	Edge_1RB_Right	22.84	21.64	21.84
n2	30	15	1865	DFT	16QAM	Outer_Full	22.44	21.24	21.44
n2	30	15	1865	DFT	64QAM	Inner_Full	22.18	20.98	21.18
n2	30	15	1865	DFT	64QAM	Edge_1RB_Left	20.70	19.50	19.70
n2	30	15	1865	DFT	64QAM	Edge_1RB_Right	22.06	20.86	21.06
n2	30	15	1865	DFT	64QAM	Outer_Full	21.89	20.69	20.89
n2	30	15	1865	DFT	256QAM	Inner_Full	20.46	19.26	19.46
n2	30	15	1865	DFT	256QAM	Edge_1RB_Left	18.95	17.75	17.95
n2	30	15	1865	DFT	256QAM	Edge_1RB_Right	20.37	19.17	19.37
n2	30	15	1865	DFT	256QAM	Outer_Full	20.33	19.13	19.33
n2	30	15	1865	CP	QPSK	Inner_Full	23.05	21.85	22.05
n2	30	15	1865	CP	QPSK	Edge_1RB_Left	20.78	19.58	19.78
n2	30	15	1865	CP	QPSK	Edge_1RB_Right	22.22	21.02	21.22
n2	30	15	1865	CP	QPSK	Outer_Full	21.87	20.67	20.87
n2	30	15	1865	CP	16QAM	Inner_Full	22.68	21.48	21.68
n2	30	15	1865	CP	16QAM	Edge_1RB_Left	21.18	19.98	20.18
n2	30	15	1865	CP	16QAM	Edge_1RB_Right	22.58	21.38	21.58
n2	30	15	1865	CP	16QAM	Outer_Full	21.84	20.64	20.84
n2	30	15	1865	CP	64QAM	Inner_Full	22.14	20.94	21.14
n2	30	15	1865	CP	64QAM	Edge_1RB_Left	20.54	19.34	19.54
n2	30	15	1865	CP	64QAM	Edge_1RB_Right	21.96	20.76	20.96
n2	30	15	1865	CP	64QAM	Outer_Full	21.88	20.68	20.88



BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n2	30	15	1865	CP	256QAM	Inner_Full	19.62	18.42	18.62
n2	30	15	1865	CP	256QAM	Edge_1RB_Left	18.00	16.80	17.00
n2	30	15	1865	CP	256QAM	Edge_1RB_Right	19.57	18.37	18.57
n2	30	15	1865	CP	256QAM	Outer_Full	19.47	18.27	18.47
n2	30	15	1880	DFT	QPSK	Inner_Full	23.11	21.91	22.11
n2	30	15	1880	DFT	QPSK	Edge_1RB_Left	22.28	21.08	21.28
n2	30	15	1880	DFT	QPSK	Edge_1RB_Right	22.43	21.23	21.43
n2	30	15	1880	DFT	QPSK	Outer_Full	23.12	21.92	22.12
n2	30	15	1880	DFT	16QAM	Inner_Full	23.02	21.82	22.02
n2	30	15	1880	DFT	16QAM	Edge_1RB_Left	22.73	21.53	21.73
n2	30	15	1880	DFT	16QAM	Edge_1RB_Right	22.25	21.05	21.25
n2	30	15	1880	DFT	16QAM	Outer_Full	22.32	21.12	21.32
n2	30	15	1880	DFT	64QAM	Inner_Full	21.86	20.66	20.86
n2	30	15	1880	DFT	64QAM	Edge_1RB_Left	21.77	20.57	20.77
n2	30	15	1880	DFT	64QAM	Edge_1RB_Right	21.28	20.08	20.28
n2	30	15	1880	DFT	64QAM	Outer_Full	21.78	20.58	20.78
n2	30	15	1880	DFT	256QAM	Inner_Full	20.31	19.11	19.31
n2	30	15	1880	DFT	256QAM	Edge_1RB_Left	20.19	18.99	19.19
n2	30	15	1880	DFT	256QAM	Edge_1RB_Right	19.69	18.49	18.69
n2	30	15	1880	DFT	256QAM	Outer_Full	20.36	19.16	19.36
n2	30	15	1880	CP	QPSK	Inner_Full	22.81	21.61	21.81
n2	30	15	1880	CP	QPSK	Edge_1RB_Left	22.08	20.88	21.08
n2	30	15	1880	CP	QPSK	Edge_1RB_Right	21.65	20.45	20.65
n2	30	15	1880	CP	QPSK	Outer_Full	21.80	20.60	20.80
n2	30	15	1880	CP	16QAM	Inner_Full	22.29	21.09	21.29
n2	30	15	1880	CP	16QAM	Edge_1RB_Left	22.30	21.10	21.30
n2	30	15	1880	CP	16QAM	Edge_1RB_Right	21.88	20.68	20.88
n2	30	15	1880	CP	16QAM	Outer_Full	21.74	20.54	20.74
n2	30	15	1880	CP	64QAM	Inner_Full	21.93	20.73	20.93
n2	30	15	1880	CP	64QAM	Edge_1RB_Left	21.74	20.54	20.74



BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n2	30	15	1880	CP	64QAM	Edge_1RB_Right	21.32	20.12	20.32
n2	30	15	1880	CP	64QAM	Outer_Full	21.79	20.59	20.79
n2	30	15	1880	CP	256QAM	Inner_Full	19.52	18.32	18.52
n2	30	15	1880	CP	256QAM	Edge_1RB_Left	19.33	18.13	18.33
n2	30	15	1880	CP	256QAM	Edge_1RB_Right	18.86	17.66	17.86
n2	30	15	1880	CP	256QAM	Outer_Full	19.51	18.31	18.51
n2	30	15	1895	DFT	QPSK	Inner_Full	23.16	21.96	22.16
n2	30	15	1895	DFT	QPSK	Edge_1RB_Left	22.31	21.11	21.31
n2	30	15	1895	DFT	QPSK	Edge_1RB_Right	22.37	21.17	21.37
n2	30	15	1895	DFT	QPSK	Outer_Full	22.95	21.75	21.95
n2	30	15	1895	DFT	16QAM	Inner_Full	23.05	21.85	22.05
n2	30	15	1895	DFT	16QAM	Edge_1RB_Left	22.63	21.43	21.63
n2	30	15	1895	DFT	16QAM	Edge_1RB_Right	21.76	20.56	20.76
n2	30	15	1895	DFT	16QAM	Outer_Full	22.07	20.87	21.07
n2	30	15	1895	DFT	64QAM	Inner_Full	21.64	20.44	20.64
n2	30	15	1895	DFT	64QAM	Edge_1RB_Left	21.87	20.67	20.87
n2	30	15	1895	DFT	64QAM	Edge_1RB_Right	21.03	19.83	20.03
n2	30	15	1895	DFT	64QAM	Outer_Full	21.66	20.46	20.66
n2	30	15	1895	DFT	256QAM	Inner_Full	20.14	18.94	19.14
n2	30	15	1895	DFT	256QAM	Edge_1RB_Left	20.33	19.13	19.33
n2	30	15	1895	DFT	256QAM	Edge_1RB_Right	19.31	18.11	18.31
n2	30	15	1895	DFT	256QAM	Outer_Full	20.08	18.88	19.08
n2	30	15	1895	CP	QPSK	Inner_Full	22.57	21.37	21.57
n2	30	15	1895	CP	QPSK	Edge_1RB_Left	22.05	20.85	21.05
n2	30	15	1895	CP	QPSK	Edge_1RB_Right	21.25	20.05	20.25
n2	30	15	1895	CP	QPSK	Outer_Full	21.53	20.33	20.53
n2	30	15	1895	CP	16QAM	Inner_Full	22.10	20.90	21.10
n2	30	15	1895	CP	16QAM	Edge_1RB_Left	22.34	21.14	21.34
n2	30	15	1895	CP	16QAM	Edge_1RB_Right	21.54	20.34	20.54
n2	30	15	1895	CP	16QAM	Outer_Full	21.53	20.33	20.53



BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n2	30	15	1895	CP	64QAM	Inner_Full	21.68	20.48	20.68
n2	30	15	1895	CP	64QAM	Edge_1RB_Left	21.75	20.55	20.75
n2	30	15	1895	CP	64QAM	Edge_1RB_Right	20.97	19.77	19.97
n2	30	15	1895	CP	64QAM	Outer_Full	21.59	20.39	20.59
n2	30	15	1895	CP	256QAM	Inner_Full	19.15	17.95	18.15
n2	30	15	1895	CP	256QAM	Edge_1RB_Left	19.48	18.28	18.48
n2	30	15	1895	CP	256QAM	Edge_1RB_Right	18.60	17.40	17.60
n2	30	15	1895	CP	256QAM	Outer_Full	19.16	17.96	18.16
n2	35	15	1872.5	DFT	QPSK	Inner_Full	23.10	21.90	22.10
n2	35	15	1872.5	DFT	QPSK	Edge_1RB_Left	23.09	21.89	22.09
n2	35	15	1872.5	DFT	QPSK	Edge_1RB_Right	23.09	21.89	22.09
n2	35	15	1872.5	DFT	QPSK	Outer_Full	23.07	21.87	22.07
n2	35	15	1872.5	DFT	16QAM	Inner_Full	22.38	21.18	21.38
n2	35	15	1872.5	DFT	16QAM	Edge_1RB_Left	22.39	21.19	21.39
n2	35	15	1872.5	DFT	16QAM	Edge_1RB_Right	22.47	21.27	21.47
n2	35	15	1872.5	DFT	16QAM	Outer_Full	22.42	21.22	21.42
n2	35	15	1872.5	DFT	64QAM	Inner_Full	21.88	20.68	20.88
n2	35	15	1872.5	DFT	64QAM	Edge_1RB_Left	21.88	20.68	20.88
n2	35	15	1872.5	DFT	64QAM	Edge_1RB_Right	21.86	20.66	20.86
n2	35	15	1872.5	DFT	64QAM	Outer_Full	21.88	20.68	20.88
n2	35	15	1872.5	DFT	256QAM	Inner_Full	20.34	19.14	19.34
n2	35	15	1872.5	DFT	256QAM	Edge_1RB_Left	20.34	19.14	19.34
n2	35	15	1872.5	DFT	256QAM	Edge_1RB_Right	20.32	19.12	19.32
n2	35	15	1872.5	DFT	256QAM	Outer_Full	20.41	19.21	19.41
n2	35	15	1872.5	CP	QPSK	Inner_Full	21.82	20.62	20.82
n2	35	15	1872.5	CP	QPSK	Edge_1RB_Left	21.89	20.69	20.89
n2	35	15	1872.5	CP	QPSK	Edge_1RB_Right	21.90	20.70	20.90
n2	35	15	1872.5	CP	QPSK	Outer_Full	21.89	20.69	20.89
n2	35	15	1872.5	CP	16QAM	Inner_Full	21.83	20.63	20.83
n2	35	15	1872.5	CP	16QAM	Edge_1RB_Left	21.85	20.65	20.85



BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n2	35	15	1872.5	CP	16QAM	Edge_1RB_Right	21.83	20.63	20.83
n2	35	15	1872.5	CP	16QAM	Outer_Full	21.83	20.63	20.83
n2	35	15	1872.5	CP	64QAM	Inner_Full	21.99	20.79	20.99
n2	35	15	1872.5	CP	64QAM	Edge_1RB_Left	21.93	20.73	20.93
n2	35	15	1872.5	CP	64QAM	Edge_1RB_Right	21.99	20.79	20.99
n2	35	15	1872.5	CP	64QAM	Outer_Full	21.94	20.74	20.94
n2	35	15	1872.5	CP	256QAM	Inner_Full	19.43	18.23	18.43
n2	35	15	1872.5	CP	256QAM	Edge_1RB_Left	19.46	18.26	18.46
n2	35	15	1872.5	CP	256QAM	Edge_1RB_Right	19.46	18.26	18.46
n2	35	15	1872.5	CP	256QAM	Outer_Full	19.47	18.27	18.47
n2	35	15	1880	DFT	QPSK	Inner_Full	23.12	21.92	22.12
n2	35	15	1880	DFT	QPSK	Edge_1RB_Left	23.17	21.97	22.17
n2	35	15	1880	DFT	QPSK	Edge_1RB_Right	23.04	21.84	22.04
n2	35	15	1880	DFT	QPSK	Outer_Full	23.11	21.91	22.11
n2	35	15	1880	DFT	16QAM	Inner_Full	22.41	21.21	21.41
n2	35	15	1880	DFT	16QAM	Edge_1RB_Left	22.43	21.23	21.43
n2	35	15	1880	DFT	16QAM	Edge_1RB_Right	22.41	21.21	21.41
n2	35	15	1880	DFT	16QAM	Outer_Full	22.42	21.22	21.42
n2	35	15	1880	DFT	64QAM	Inner_Full	21.92	20.72	20.92
n2	35	15	1880	DFT	64QAM	Edge_1RB_Left	21.86	20.66	20.86
n2	35	15	1880	DFT	64QAM	Edge_1RB_Right	21.93	20.73	20.93
n2	35	15	1880	DFT	64QAM	Outer_Full	21.92	20.72	20.92
n2	35	15	1880	DFT	256QAM	Inner_Full	20.43	19.23	19.43
n2	35	15	1880	DFT	256QAM	Edge_1RB_Left	20.51	19.31	19.51
n2	35	15	1880	DFT	256QAM	Edge_1RB_Right	20.49	19.29	19.49
n2	35	15	1880	DFT	256QAM	Outer_Full	20.50	19.30	19.50
n2	35	15	1880	CP	QPSK	Inner_Full	21.84	20.64	20.84
n2	35	15	1880	CP	QPSK	Edge_1RB_Left	21.85	20.65	20.85
n2	35	15	1880	CP	QPSK	Edge_1RB_Right	21.86	20.66	20.86
n2	35	15	1880	CP	QPSK	Outer_Full	21.83	20.63	20.83



BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n2	35	15	1880	CP	16QAM	Inner_Full	21.82	20.62	20.82
n2	35	15	1880	CP	16QAM	Edge_1RB_Left	21.82	20.62	20.82
n2	35	15	1880	CP	16QAM	Edge_1RB_Right	21.79	20.59	20.79
n2	35	15	1880	CP	16QAM	Outer_Full	21.81	20.61	20.81
n2	35	15	1880	CP	64QAM	Inner_Full	21.87	20.67	20.87
n2	35	15	1880	CP	64QAM	Edge_1RB_Left	21.91	20.71	20.91
n2	35	15	1880	CP	64QAM	Edge_1RB_Right	21.91	20.71	20.91
n2	35	15	1880	CP	64QAM	Outer_Full	21.91	20.71	20.91
n2	35	15	1880	CP	256QAM	Inner_Full	19.47	18.27	18.47
n2	35	15	1880	CP	256QAM	Edge_1RB_Left	19.49	18.29	18.49
n2	35	15	1880	CP	256QAM	Edge_1RB_Right	19.50	18.30	18.50
n2	35	15	1880	CP	256QAM	Outer_Full	19.50	18.30	18.50
n2	35	15	1892.5	DFT	QPSK	Inner_Full	22.98	21.78	21.98
n2	35	15	1892.5	DFT	QPSK	Edge_1RB_Left	22.95	21.75	21.95
n2	35	15	1892.5	DFT	QPSK	Edge_1RB_Right	22.90	21.70	21.90
n2	35	15	1892.5	DFT	QPSK	Outer_Full	22.94	21.74	21.94
n2	35	15	1892.5	DFT	16QAM	Inner_Full	22.15	20.95	21.15
n2	35	15	1892.5	DFT	16QAM	Edge_1RB_Left	22.24	21.04	21.24
n2	35	15	1892.5	DFT	16QAM	Edge_1RB_Right	22.25	21.05	21.25
n2	35	15	1892.5	DFT	16QAM	Outer_Full	22.19	20.99	21.19
n2	35	15	1892.5	DFT	64QAM	Inner_Full	21.69	20.49	20.69
n2	35	15	1892.5	DFT	64QAM	Edge_1RB_Left	21.69	20.49	20.69
n2	35	15	1892.5	DFT	64QAM	Edge_1RB_Right	21.69	20.49	20.69
n2	35	15	1892.5	DFT	64QAM	Outer_Full	21.66	20.46	20.66
n2	35	15	1892.5	DFT	256QAM	Inner_Full	20.29	19.09	19.29
n2	35	15	1892.5	DFT	256QAM	Edge_1RB_Left	20.29	19.09	19.29
n2	35	15	1892.5	DFT	256QAM	Edge_1RB_Right	20.22	19.02	19.22
n2	35	15	1892.5	DFT	256QAM	Outer_Full	20.28	19.08	19.28
n2	35	15	1892.5	CP	QPSK	Inner_Full	21.75	20.55	20.75
n2	35	15	1892.5	CP	QPSK	Edge_1RB_Left	21.75	20.55	20.75



BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n2	35	15	1892.5	CP	QPSK	Edge_1RB_Right	21.71	20.51	20.71
n2	35	15	1892.5	CP	QPSK	Outer_Full	21.76	20.56	20.76
n2	35	15	1892.5	CP	16QAM	Inner_Full	21.69	20.49	20.69
n2	35	15	1892.5	CP	16QAM	Edge_1RB_Left	21.63	20.43	20.63
n2	35	15	1892.5	CP	16QAM	Edge_1RB_Right	21.65	20.45	20.65
n2	35	15	1892.5	CP	16QAM	Outer_Full	21.70	20.50	20.70
n2	35	15	1892.5	CP	64QAM	Inner_Full	21.77	20.57	20.77
n2	35	15	1892.5	CP	64QAM	Edge_1RB_Left	21.78	20.58	20.78
n2	35	15	1892.5	CP	64QAM	Edge_1RB_Right	21.77	20.57	20.77
n2	35	15	1892.5	CP	64QAM	Outer_Full	21.76	20.56	20.76
n2	35	15	1892.5	CP	256QAM	Inner_Full	19.38	18.18	18.38
n2	35	15	1892.5	CP	256QAM	Edge_1RB_Left	19.38	18.18	18.38
n2	35	15	1892.5	CP	256QAM	Edge_1RB_Right	19.39	18.19	18.39
n2	35	15	1892.5	CP	256QAM	Outer_Full	19.37	18.17	18.37
n2	40	15	1870	DFT	QPSK	Inner_Full	23.14	21.94	22.14
n2	40	15	1870	DFT	QPSK	Edge_1RB_Left	22.00	20.80	21.00
n2	40	15	1870	DFT	QPSK	Edge_1RB_Right	22.31	21.11	21.31
n2	40	15	1870	DFT	QPSK	Outer_Full	23.09	21.89	22.09
n2	40	15	1870	DFT	16QAM	Inner_Full	23.00	21.80	22.00
n2	40	15	1870	DFT	16QAM	Edge_1RB_Left	21.34	20.14	20.34
n2	40	15	1870	DFT	16QAM	Edge_1RB_Right	22.41	21.21	21.41
n2	40	15	1870	DFT	16QAM	Outer_Full	22.26	21.06	21.26
n2	40	15	1870	DFT	64QAM	Inner_Full	22.12	20.92	21.12
n2	40	15	1870	DFT	64QAM	Edge_1RB_Left	20.55	19.35	19.55
n2	40	15	1870	DFT	64QAM	Edge_1RB_Right	21.67	20.47	20.67
n2	40	15	1870	DFT	64QAM	Outer_Full	21.74	20.54	20.74
n2	40	15	1870	DFT	256QAM	Inner_Full	20.52	19.32	19.52
n2	40	15	1870	DFT	256QAM	Edge_1RB_Left	18.86	17.66	17.86
n2	40	15	1870	DFT	256QAM	Edge_1RB_Right	20.02	18.82	19.02
n2	40	15	1870	DFT	256QAM	Outer_Full	20.27	19.07	19.27



BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n2	40	15	1870	CP	QPSK	Inner_Full	22.95	21.75	21.95
n2	40	15	1870	CP	QPSK	Edge_1RB_Left	20.69	19.49	19.69
n2	40	15	1870	CP	QPSK	Edge_1RB_Right	21.81	20.61	20.81
n2	40	15	1870	CP	QPSK	Outer_Full	21.75	20.55	20.75
n2	40	15	1870	CP	16QAM	Inner_Full	22.59	21.39	21.59
n2	40	15	1870	CP	16QAM	Edge_1RB_Left	21.08	19.88	20.08
n2	40	15	1870	CP	16QAM	Edge_1RB_Right	22.19	20.99	21.19
n2	40	15	1870	CP	16QAM	Outer_Full	21.74	20.54	20.74
n2	40	15	1870	CP	64QAM	Inner_Full	22.15	20.95	21.15
n2	40	15	1870	CP	64QAM	Edge_1RB_Left	20.43	19.23	19.43
n2	40	15	1870	CP	64QAM	Edge_1RB_Right	21.59	20.39	20.59
n2	40	15	1870	CP	64QAM	Outer_Full	21.74	20.54	20.74
n2	40	15	1870	CP	256QAM	Inner_Full	19.54	18.34	18.54
n2	40	15	1870	CP	256QAM	Edge_1RB_Left	17.88	16.68	16.88
n2	40	15	1870	CP	256QAM	Edge_1RB_Right	19.10	17.90	18.10
n2	40	15	1870	CP	256QAM	Outer_Full	19.32	18.12	18.32
n2	40	15	1880	DFT	QPSK	Inner_Full	23.21	22.01	22.21
n2	40	15	1880	DFT	QPSK	Edge_1RB_Left	22.20	21.00	21.20
n2	40	15	1880	DFT	QPSK	Edge_1RB_Right	22.35	21.15	21.35
n2	40	15	1880	DFT	QPSK	Outer_Full	22.82	21.62	21.82
n2	40	15	1880	DFT	16QAM	Inner_Full	23.04	21.84	22.04
n2	40	15	1880	DFT	16QAM	Edge_1RB_Left	22.18	20.98	21.18
n2	40	15	1880	DFT	16QAM	Edge_1RB_Right	22.15	20.95	21.15
n2	40	15	1880	DFT	16QAM	Outer_Full	22.30	21.10	21.30
n2	40	15	1880	DFT	64QAM	Inner_Full	22.03	20.83	21.03
n2	40	15	1880	DFT	64QAM	Edge_1RB_Left	21.53	20.33	20.53
n2	40	15	1880	DFT	64QAM	Edge_1RB_Right	21.47	20.27	20.47
n2	40	15	1880	DFT	64QAM	Outer_Full	21.72	20.52	20.72
n2	40	15	1880	DFT	256QAM	Inner_Full	20.41	19.21	19.41
n2	40	15	1880	DFT	256QAM	Edge_1RB_Left	19.75	18.55	18.75



BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n2	40	15	1880	DFT	256QAM	Edge_1RB_Right	19.70	18.50	18.70
n2	40	15	1880	DFT	256QAM	Outer_Full	20.34	19.14	19.34
n2	40	15	1880	CP	QPSK	Inner_Full	22.77	21.57	21.77
n2	40	15	1880	CP	QPSK	Edge_1RB_Left	21.75	20.55	20.75
n2	40	15	1880	CP	QPSK	Edge_1RB_Right	21.56	20.36	20.56
n2	40	15	1880	CP	QPSK	Outer_Full	21.73	20.53	20.73
n2	40	15	1880	CP	16QAM	Inner_Full	22.38	21.18	21.38
n2	40	15	1880	CP	16QAM	Edge_1RB_Left	22.08	20.88	21.08
n2	40	15	1880	CP	16QAM	Edge_1RB_Right	21.92	20.72	20.92
n2	40	15	1880	CP	16QAM	Outer_Full	21.75	20.55	20.75
n2	40	15	1880	CP	64QAM	Inner_Full	21.95	20.75	20.95
n2	40	15	1880	CP	64QAM	Edge_1RB_Left	21.51	20.31	20.51
n2	40	15	1880	CP	64QAM	Edge_1RB_Right	21.35	20.15	20.35
n2	40	15	1880	CP	64QAM	Outer_Full	21.69	20.49	20.69
n2	40	15	1880	CP	256QAM	Inner_Full	19.45	18.25	18.45
n2	40	15	1880	CP	256QAM	Edge_1RB_Left	18.91	17.71	17.91
n2	40	15	1880	CP	256QAM	Edge_1RB_Right	18.77	17.57	17.77
n2	40	15	1880	CP	256QAM	Outer_Full	19.31	18.11	18.31
n2	40	15	1890	DFT	QPSK	Inner_Full	23.16	21.96	22.16
n2	40	15	1890	DFT	QPSK	Edge_1RB_Left	22.28	21.08	21.28
n2	40	15	1890	DFT	QPSK	Edge_1RB_Right	22.09	20.89	21.09
n2	40	15	1890	DFT	QPSK	Outer_Full	22.58	21.38	21.58
n2	40	15	1890	DFT	16QAM	Inner_Full	22.93	21.73	21.93
n2	40	15	1890	DFT	16QAM	Edge_1RB_Left	22.50	21.30	21.50
n2	40	15	1890	DFT	16QAM	Edge_1RB_Right	21.66	20.46	20.66
n2	40	15	1890	DFT	16QAM	Outer_Full	22.17	20.97	21.17
n2	40	15	1890	DFT	64QAM	Inner_Full	21.71	20.51	20.71
n2	40	15	1890	DFT	64QAM	Edge_1RB_Left	21.75	20.55	20.75
n2	40	15	1890	DFT	64QAM	Edge_1RB_Right	20.87	19.67	19.87
n2	40	15	1890	DFT	64QAM	Outer_Full	21.51	20.31	20.51



BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n2	40	15	1890	DFT	256QAM	Inner_Full	20.21	19.01	19.21
n2	40	15	1890	DFT	256QAM	Edge_1RB_Left	20.27	19.07	19.27
n2	40	15	1890	DFT	256QAM	Edge_1RB_Right	19.20	18.00	18.20
n2	40	15	1890	DFT	256QAM	Outer_Full	20.18	18.98	19.18
n2	40	15	1890	CP	QPSK	Inner_Full	22.48	21.28	21.48
n2	40	15	1890	CP	QPSK	Edge_1RB_Left	21.91	20.71	20.91
n2	40	15	1890	CP	QPSK	Edge_1RB_Right	20.96	19.76	19.96
n2	40	15	1890	CP	QPSK	Outer_Full	21.56	20.36	20.56
n2	40	15	1890	CP	16QAM	Inner_Full	22.12	20.92	21.12
n2	40	15	1890	CP	16QAM	Edge_1RB_Left	22.27	21.07	21.27
n2	40	15	1890	CP	16QAM	Edge_1RB_Right	21.34	20.14	20.34
n2	40	15	1890	CP	16QAM	Outer_Full	21.59	20.39	20.59
n2	40	15	1890	CP	64QAM	Inner_Full	21.63	20.43	20.63
n2	40	15	1890	CP	64QAM	Edge_1RB_Left	21.75	20.55	20.75
n2	40	15	1890	CP	64QAM	Edge_1RB_Right	20.83	19.63	19.83
n2	40	15	1890	CP	64QAM	Outer_Full	21.59	20.39	20.59
n2	40	15	1890	CP	256QAM	Inner_Full	19.23	18.03	18.23
n2	40	15	1890	CP	256QAM	Edge_1RB_Left	19.35	18.15	18.35
n2	40	15	1890	CP	256QAM	Edge_1RB_Right	18.34	17.14	17.34
n2	40	15	1890	CP	256QAM	Outer_Full	19.16	17.96	18.16



n5

BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n5	5	15	826.5	DFT	QPSK	Inner_Full	24.40	18.10	18.70
n5	5	15	826.5	DFT	QPSK	Edge_1RB_Left	21.78	15.48	16.08
n5	5	15	826.5	DFT	QPSK	Edge_1RB_Right	21.73	15.43	16.03
n5	5	15	826.5	DFT	QPSK	Outer_Full	23.36	17.06	17.66
n5	5	15	826.5	DFT	16QAM	Inner_Full	23.50	17.20	17.80
n5	5	15	826.5	DFT	16QAM	Edge_1RB_Left	22.47	16.17	16.77
n5	5	15	826.5	DFT	16QAM	Edge_1RB_Right	22.15	15.85	16.45
n5	5	15	826.5	DFT	16QAM	Outer_Full	22.42	16.12	16.72
n5	5	15	826.5	DFT	64QAM	Inner_Full	21.97	15.67	16.27
n5	5	15	826.5	DFT	64QAM	Edge_1RB_Left	21.97	15.67	16.27
n5	5	15	826.5	DFT	64QAM	Edge_1RB_Right	21.63	15.33	15.93
n5	5	15	826.5	DFT	64QAM	Outer_Full	21.94	15.64	16.24
n5	5	15	826.5	DFT	256QAM	Inner_Full	20.51	14.21	14.81
n5	5	15	826.5	DFT	256QAM	Edge_1RB_Left	20.27	13.97	14.57
n5	5	15	826.5	DFT	256QAM	Edge_1RB_Right	20.21	13.91	14.51
n5	5	15	826.5	DFT	256QAM	Outer_Full	20.47	14.17	14.77
n5	5	15	826.5	CP	QPSK	Inner_Full	22.90	16.60	17.20
n5	5	15	826.5	CP	QPSK	Edge_1RB_Left	21.76	15.46	16.06
n5	5	15	826.5	CP	QPSK	Edge_1RB_Right	21.67	15.37	15.97
n5	5	15	826.5	CP	QPSK	Outer_Full	21.91	15.61	16.21
n5	5	15	826.5	CP	16QAM	Inner_Full	22.51	16.21	16.81
n5	5	15	826.5	CP	16QAM	Edge_1RB_Left	21.96	15.66	16.26
n5	5	15	826.5	CP	16QAM	Edge_1RB_Right	21.77	15.47	16.07
n5	5	15	826.5	CP	16QAM	Outer_Full	21.84	15.54	16.14
n5	5	15	826.5	CP	64QAM	Inner_Full	22.04	15.74	16.34
n5	5	15	826.5	CP	64QAM	Edge_1RB_Left	21.26	14.96	15.56
n5	5	15	826.5	CP	64QAM	Edge_1RB_Right	21.33	15.03	15.63
n5	5	15	826.5	CP	64QAM	Outer_Full	21.84	15.54	16.14



BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n5	5	15	826.5	CP	256QAM	Inner_Full	19.63	13.33	13.93
n5	5	15	826.5	CP	256QAM	Edge_1RB_Left	18.09	11.79	12.39
n5	5	15	826.5	CP	256QAM	Edge_1RB_Right	18.37	12.07	12.67
n5	5	15	826.5	CP	256QAM	Outer_Full	19.51	13.21	13.81
n5	5	15	836.5	DFT	QPSK	Inner_Full	24.40	18.10	18.70
n5	5	15	836.5	DFT	QPSK	Edge_1RB_Left	21.66	15.36	15.96
n5	5	15	836.5	DFT	QPSK	Edge_1RB_Right	21.59	15.29	15.89
n5	5	15	836.5	DFT	QPSK	Outer_Full	24.03	17.73	18.33
n5	5	15	836.5	DFT	16QAM	Inner_Full	24.12	17.82	18.42
n5	5	15	836.5	DFT	16QAM	Edge_1RB_Left	22.86	16.56	17.16
n5	5	15	836.5	DFT	16QAM	Edge_1RB_Right	22.84	16.54	17.14
n5	5	15	836.5	DFT	16QAM	Outer_Full	23.22	16.92	17.52
n5	5	15	836.5	DFT	64QAM	Inner_Full	22.94	16.64	17.24
n5	5	15	836.5	DFT	64QAM	Edge_1RB_Left	21.96	15.66	16.26
n5	5	15	836.5	DFT	64QAM	Edge_1RB_Right	21.92	15.62	16.22
n5	5	15	836.5	DFT	64QAM	Outer_Full	22.83	16.53	17.13
n5	5	15	836.5	DFT	256QAM	Inner_Full	21.39	15.09	15.69
n5	5	15	836.5	DFT	256QAM	Edge_1RB_Left	19.92	13.62	14.22
n5	5	15	836.5	DFT	256QAM	Edge_1RB_Right	19.82	13.52	14.12
n5	5	15	836.5	DFT	256QAM	Outer_Full	21.23	14.93	15.53
n5	5	15	836.5	CP	QPSK	Inner_Full	23.74	17.44	18.04
n5	5	15	836.5	CP	QPSK	Edge_1RB_Left	21.72	15.42	16.02
n5	5	15	836.5	CP	QPSK	Edge_1RB_Right	21.62	15.32	15.92
n5	5	15	836.5	CP	QPSK	Outer_Full	22.69	16.39	16.99
n5	5	15	836.5	CP	16QAM	Inner_Full	23.41	17.11	17.71
n5	5	15	836.5	CP	16QAM	Edge_1RB_Left	22.16	15.86	16.46
n5	5	15	836.5	CP	16QAM	Edge_1RB_Right	22.08	15.78	16.38
n5	5	15	836.5	CP	16QAM	Outer_Full	22.56	16.26	16.86
n5	5	15	836.5	CP	64QAM	Inner_Full	22.83	16.53	17.13
n5	5	15	836.5	CP	64QAM	Edge_1RB_Left	20.88	14.58	15.18



BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n5	5	15	836.5	CP	64QAM	Edge_1RB_Right	20.83	14.53	15.13
n5	5	15	836.5	CP	64QAM	Outer_Full	22.74	16.44	17.04
n5	5	15	836.5	CP	256QAM	Inner_Full	20.37	14.07	14.67
n5	5	15	836.5	CP	256QAM	Edge_1RB_Left	17.93	11.63	12.23
n5	5	15	836.5	CP	256QAM	Edge_1RB_Right	17.87	11.57	12.17
n5	5	15	836.5	CP	256QAM	Outer_Full	20.31	14.01	14.61
n5	5	15	846.5	DFT	QPSK	Inner_Full	24.23	17.93	18.53
n5	5	15	846.5	DFT	QPSK	Edge_1RB_Left	21.49	15.19	15.79
n5	5	15	846.5	DFT	QPSK	Edge_1RB_Right	21.36	15.06	15.66
n5	5	15	846.5	DFT	QPSK	Outer_Full	23.94	17.64	18.24
n5	5	15	846.5	DFT	16QAM	Inner_Full	23.97	17.67	18.27
n5	5	15	846.5	DFT	16QAM	Edge_1RB_Left	22.68	16.38	16.98
n5	5	15	846.5	DFT	16QAM	Edge_1RB_Right	22.54	16.24	16.84
n5	5	15	846.5	DFT	16QAM	Outer_Full	23.15	16.85	17.45
n5	5	15	846.5	DFT	64QAM	Inner_Full	22.80	16.50	17.10
n5	5	15	846.5	DFT	64QAM	Edge_1RB_Left	21.84	15.54	16.14
n5	5	15	846.5	DFT	64QAM	Edge_1RB_Right	21.71	15.41	16.01
n5	5	15	846.5	DFT	64QAM	Outer_Full	22.64	16.34	16.94
n5	5	15	846.5	DFT	256QAM	Inner_Full	21.23	14.93	15.53
n5	5	15	846.5	DFT	256QAM	Edge_1RB_Left	19.66	13.36	13.96
n5	5	15	846.5	DFT	256QAM	Edge_1RB_Right	19.51	13.21	13.81
n5	5	15	846.5	DFT	256QAM	Outer_Full	21.14	14.84	15.44
n5	5	15	846.5	CP	QPSK	Inner_Full	23.71	17.41	18.01
n5	5	15	846.5	CP	QPSK	Edge_1RB_Left	21.54	15.24	15.84
n5	5	15	846.5	CP	QPSK	Edge_1RB_Right	21.37	15.07	15.67
n5	5	15	846.5	CP	QPSK	Outer_Full	22.60	16.30	16.90
n5	5	15	846.5	CP	16QAM	Inner_Full	23.38	17.08	17.68
n5	5	15	846.5	CP	16QAM	Edge_1RB_Left	21.94	15.64	16.24
n5	5	15	846.5	CP	16QAM	Edge_1RB_Right	21.80	15.50	16.10
n5	5	15	846.5	CP	16QAM	Outer_Full	22.58	16.28	16.88



BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n5	5	15	846.5	CP	64QAM	Inner_Full	22.60	16.30	16.90
n5	5	15	846.5	CP	64QAM	Edge_1RB_Left	20.68	14.38	14.98
n5	5	15	846.5	CP	64QAM	Edge_1RB_Right	20.56	14.26	14.86
n5	5	15	846.5	CP	64QAM	Outer_Full	22.67	16.37	16.97
n5	5	15	846.5	CP	256QAM	Inner_Full	20.35	14.05	14.65
n5	5	15	846.5	CP	256QAM	Edge_1RB_Left	17.73	11.43	12.03
n5	5	15	846.5	CP	256QAM	Edge_1RB_Right	17.57	11.27	11.87
n5	5	15	846.5	CP	256QAM	Outer_Full	20.14	13.84	14.44
n5	10	15	829	DFT	QPSK	Inner_Full	24.54	18.24	18.84
n5	10	15	829	DFT	QPSK	Edge_1RB_Left	21.71	15.41	16.01
n5	10	15	829	DFT	QPSK	Edge_1RB_Right	21.70	15.40	16.00
n5	10	15	829	DFT	QPSK	Outer_Full	23.37	17.07	17.67
n5	10	15	829	DFT	16QAM	Inner_Full	23.54	17.24	17.84
n5	10	15	829	DFT	16QAM	Edge_1RB_Left	22.78	16.48	17.08
n5	10	15	829	DFT	16QAM	Edge_1RB_Right	22.93	16.63	17.23
n5	10	15	829	DFT	16QAM	Outer_Full	22.48	16.18	16.78
n5	10	15	829	DFT	64QAM	Inner_Full	22.11	15.81	16.41
n5	10	15	829	DFT	64QAM	Edge_1RB_Left	21.96	15.66	16.26
n5	10	15	829	DFT	64QAM	Edge_1RB_Right	22.07	15.77	16.37
n5	10	15	829	DFT	64QAM	Outer_Full	22.04	15.74	16.34
n5	10	15	829	DFT	256QAM	Inner_Full	20.57	14.27	14.87
n5	10	15	829	DFT	256QAM	Edge_1RB_Left	19.94	13.64	14.24
n5	10	15	829	DFT	256QAM	Edge_1RB_Right	19.88	13.58	14.18
n5	10	15	829	DFT	256QAM	Outer_Full	20.57	14.27	14.87
n5	10	15	829	CP	QPSK	Inner_Full	23.00	16.70	17.30
n5	10	15	829	CP	QPSK	Edge_1RB_Left	21.78	15.48	16.08
n5	10	15	829	CP	QPSK	Edge_1RB_Right	21.76	15.46	16.06
n5	10	15	829	CP	QPSK	Outer_Full	22.00	15.70	16.30
n5	10	15	829	CP	16QAM	Inner_Full	22.57	16.27	16.87
n5	10	15	829	CP	16QAM	Edge_1RB_Left	22.14	15.84	16.44



BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n5	10	15	829	CP	16QAM	Edge_1RB_Right	22.08	15.78	16.38
n5	10	15	829	CP	16QAM	Outer_Full	21.97	15.67	16.27
n5	10	15	829	CP	64QAM	Inner_Full	22.00	15.70	16.30
n5	10	15	829	CP	64QAM	Edge_1RB_Left	20.99	14.69	15.29
n5	10	15	829	CP	64QAM	Edge_1RB_Right	20.89	14.59	15.19
n5	10	15	829	CP	64QAM	Outer_Full	22.01	15.71	16.31
n5	10	15	829	CP	256QAM	Inner_Full	19.62	13.32	13.92
n5	10	15	829	CP	256QAM	Edge_1RB_Left	18.01	11.71	12.31
n5	10	15	829	CP	256QAM	Edge_1RB_Right	17.93	11.63	12.23
n5	10	15	829	CP	256QAM	Outer_Full	19.56	13.26	13.86
n5	10	15	836.5	DFT	QPSK	Inner_Full	24.40	18.10	18.70
n5	10	15	836.5	DFT	QPSK	Edge_1RB_Left	21.63	15.33	15.93
n5	10	15	836.5	DFT	QPSK	Edge_1RB_Right	21.55	15.25	15.85
n5	10	15	836.5	DFT	QPSK	Outer_Full	24.01	17.71	18.31
n5	10	15	836.5	DFT	16QAM	Inner_Full	24.03	17.73	18.33
n5	10	15	836.5	DFT	16QAM	Edge_1RB_Left	22.90	16.60	17.20
n5	10	15	836.5	DFT	16QAM	Edge_1RB_Right	22.84	16.54	17.14
n5	10	15	836.5	DFT	16QAM	Outer_Full	22.95	16.65	17.25
n5	10	15	836.5	DFT	64QAM	Inner_Full	22.88	16.58	17.18
n5	10	15	836.5	DFT	64QAM	Edge_1RB_Left	22.08	15.78	16.38
n5	10	15	836.5	DFT	64QAM	Edge_1RB_Right	22.04	15.74	16.34
n5	10	15	836.5	DFT	64QAM	Outer_Full	22.55	16.25	16.85
n5	10	15	836.5	DFT	256QAM	Inner_Full	21.36	15.06	15.66
n5	10	15	836.5	DFT	256QAM	Edge_1RB_Left	19.92	13.62	14.22
n5	10	15	836.5	DFT	256QAM	Edge_1RB_Right	19.72	13.42	14.02
n5	10	15	836.5	DFT	256QAM	Outer_Full	21.09	14.79	15.39
n5	10	15	836.5	CP	QPSK	Inner_Full	23.75	17.45	18.05
n5	10	15	836.5	CP	QPSK	Edge_1RB_Left	21.78	15.48	16.08
n5	10	15	836.5	CP	QPSK	Edge_1RB_Right	21.65	15.35	15.95
n5	10	15	836.5	CP	QPSK	Outer_Full	22.54	16.24	16.84



BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n5	10	15	836.5	CP	16QAM	Inner_Full	23.29	16.99	17.59
n5	10	15	836.5	CP	16QAM	Edge_1RB_Left	22.08	15.78	16.38
n5	10	15	836.5	CP	16QAM	Edge_1RB_Right	22.02	15.72	16.32
n5	10	15	836.5	CP	16QAM	Outer_Full	22.52	16.22	16.82
n5	10	15	836.5	CP	64QAM	Inner_Full	22.80	16.50	17.10
n5	10	15	836.5	CP	64QAM	Edge_1RB_Left	20.85	14.55	15.15
n5	10	15	836.5	CP	64QAM	Edge_1RB_Right	20.87	14.57	15.17
n5	10	15	836.5	CP	64QAM	Outer_Full	22.58	16.28	16.88
n5	10	15	836.5	CP	256QAM	Inner_Full	20.33	14.03	14.63
n5	10	15	836.5	CP	256QAM	Edge_1RB_Left	17.86	11.56	12.16
n5	10	15	836.5	CP	256QAM	Edge_1RB_Right	17.80	11.50	12.10
n5	10	15	836.5	CP	256QAM	Outer_Full	20.05	13.75	14.35
n5	10	15	844	DFT	QPSK	Inner_Full	24.34	18.04	18.64
n5	10	15	844	DFT	QPSK	Edge_1RB_Left	21.56	15.26	15.86
n5	10	15	844	DFT	QPSK	Edge_1RB_Right	21.39	15.09	15.69
n5	10	15	844	DFT	QPSK	Outer_Full	23.97	17.67	18.27
n5	10	15	844	DFT	16QAM	Inner_Full	23.94	17.64	18.24
n5	10	15	844	DFT	16QAM	Edge_1RB_Left	22.80	16.50	17.10
n5	10	15	844	DFT	16QAM	Edge_1RB_Right	22.60	16.30	16.90
n5	10	15	844	DFT	16QAM	Outer_Full	23.06	16.76	17.36
n5	10	15	844	DFT	64QAM	Inner_Full	22.78	16.48	17.08
n5	10	15	844	DFT	64QAM	Edge_1RB_Left	22.00	15.70	16.30
n5	10	15	844	DFT	64QAM	Edge_1RB_Right	21.77	15.47	16.07
n5	10	15	844	DFT	64QAM	Outer_Full	22.57	16.27	16.87
n5	10	15	844	DFT	256QAM	Inner_Full	21.08	14.78	15.38
n5	10	15	844	DFT	256QAM	Edge_1RB_Left	19.76	13.46	14.06
n5	10	15	844	DFT	256QAM	Edge_1RB_Right	19.51	13.21	13.81
n5	10	15	844	DFT	256QAM	Outer_Full	21.14	14.84	15.44
n5	10	15	844	CP	QPSK	Inner_Full	23.58	17.28	17.88
n5	10	15	844	CP	QPSK	Edge_1RB_Left	21.62	15.32	15.92



BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n5	10	15	844	CP	QPSK	Edge_1RB_Right	21.46	15.16	15.76
n5	10	15	844	CP	QPSK	Outer_Full	22.53	16.23	16.83
n5	10	15	844	CP	16QAM	Inner_Full	23.19	16.89	17.49
n5	10	15	844	CP	16QAM	Edge_1RB_Left	22.00	15.70	16.30
n5	10	15	844	CP	16QAM	Edge_1RB_Right	21.82	15.52	16.12
n5	10	15	844	CP	16QAM	Outer_Full	22.47	16.17	16.77
n5	10	15	844	CP	64QAM	Inner_Full	22.65	16.35	16.95
n5	10	15	844	CP	64QAM	Edge_1RB_Left	20.80	14.50	15.10
n5	10	15	844	CP	64QAM	Edge_1RB_Right	20.57	14.27	14.87
n5	10	15	844	CP	64QAM	Outer_Full	22.64	16.34	16.94
n5	10	15	844	CP	256QAM	Inner_Full	20.14	13.84	14.44
n5	10	15	844	CP	256QAM	Edge_1RB_Left	17.84	11.54	12.14
n5	10	15	844	CP	256QAM	Edge_1RB_Right	17.58	11.28	11.88
n5	10	15	844	CP	256QAM	Outer_Full	20.02	13.72	14.32
n5	15	15	831.5	DFT	QPSK	Inner_Full	24.55	18.25	18.85
n5	15	15	831.5	DFT	QPSK	Edge_1RB_Left	21.86	15.56	16.16
n5	15	15	831.5	DFT	QPSK	Edge_1RB_Right	21.69	15.39	15.99
n5	15	15	831.5	DFT	QPSK	Outer_Full	23.48	17.18	17.78
n5	15	15	831.5	DFT	16QAM	Inner_Full	23.62	17.32	17.92
n5	15	15	831.5	DFT	16QAM	Edge_1RB_Left	22.86	16.56	17.16
n5	15	15	831.5	DFT	16QAM	Edge_1RB_Right	22.93	16.63	17.23
n5	15	15	831.5	DFT	16QAM	Outer_Full	22.70	16.40	17.00
n5	15	15	831.5	DFT	64QAM	Inner_Full	22.28	15.98	16.58
n5	15	15	831.5	DFT	64QAM	Edge_1RB_Left	21.90	15.60	16.20
n5	15	15	831.5	DFT	64QAM	Edge_1RB_Right	22.05	15.75	16.35
n5	15	15	831.5	DFT	64QAM	Outer_Full	22.30	16.00	16.60
n5	15	15	831.5	DFT	256QAM	Inner_Full	20.81	14.51	15.11
n5	15	15	831.5	DFT	256QAM	Edge_1RB_Left	20.07	13.77	14.37
n5	15	15	831.5	DFT	256QAM	Edge_1RB_Right	19.97	13.67	14.27
n5	15	15	831.5	DFT	256QAM	Outer_Full	20.76	14.46	15.06



BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n5	15	15	831.5	CP	QPSK	Inner_Full	23.10	16.80	17.40
n5	15	15	831.5	CP	QPSK	Edge_1RB_Left	21.86	15.56	16.16
n5	15	15	831.5	CP	QPSK	Edge_1RB_Right	21.69	15.39	15.99
n5	15	15	831.5	CP	QPSK	Outer_Full	22.18	15.88	16.48
n5	15	15	831.5	CP	16QAM	Inner_Full	22.65	16.35	16.95
n5	15	15	831.5	CP	16QAM	Edge_1RB_Left	22.32	16.02	16.62
n5	15	15	831.5	CP	16QAM	Edge_1RB_Right	22.11	15.81	16.41
n5	15	15	831.5	CP	16QAM	Outer_Full	22.20	15.90	16.50
n5	15	15	831.5	CP	64QAM	Inner_Full	22.26	15.96	16.56
n5	15	15	831.5	CP	64QAM	Edge_1RB_Left	21.06	14.76	15.36
n5	15	15	831.5	CP	64QAM	Edge_1RB_Right	21.03	14.73	15.33
n5	15	15	831.5	CP	64QAM	Outer_Full	22.24	15.94	16.54
n5	15	15	831.5	CP	256QAM	Inner_Full	19.80	13.50	14.10
n5	15	15	831.5	CP	256QAM	Edge_1RB_Left	18.03	11.73	12.33
n5	15	15	831.5	CP	256QAM	Edge_1RB_Right	18.01	11.71	12.31
n5	15	15	831.5	CP	256QAM	Outer_Full	19.82	13.52	14.12
n5	15	15	836.5	DFT	QPSK	Inner_Full	24.46	18.16	18.76
n5	15	15	836.5	DFT	QPSK	Edge_1RB_Left	21.84	15.54	16.14
n5	15	15	836.5	DFT	QPSK	Edge_1RB_Right	21.55	15.25	15.85
n5	15	15	836.5	DFT	QPSK	Outer_Full	23.88	17.58	18.18
n5	15	15	836.5	DFT	16QAM	Inner_Full	24.13	17.83	18.43
n5	15	15	836.5	DFT	16QAM	Edge_1RB_Left	22.61	16.31	16.91
n5	15	15	836.5	DFT	16QAM	Edge_1RB_Right	22.83	16.53	17.13
n5	15	15	836.5	DFT	16QAM	Outer_Full	23.02	16.72	17.32
n5	15	15	836.5	DFT	64QAM	Inner_Full	22.86	16.56	17.16
n5	15	15	836.5	DFT	64QAM	Edge_1RB_Left	21.75	15.45	16.05
n5	15	15	836.5	DFT	64QAM	Edge_1RB_Right	21.95	15.65	16.25
n5	15	15	836.5	DFT	64QAM	Outer_Full	22.55	16.25	16.85
n5	15	15	836.5	DFT	256QAM	Inner_Full	21.24	14.94	15.54
n5	15	15	836.5	DFT	256QAM	Edge_1RB_Left	20.02	13.72	14.32



BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n5	15	15	836.5	DFT	256QAM	Edge_1RB_Right	19.82	13.52	14.12
n5	15	15	836.5	DFT	256QAM	Outer_Full	20.97	14.67	15.27
n5	15	15	836.5	CP	QPSK	Inner_Full	23.62	17.32	17.92
n5	15	15	836.5	CP	QPSK	Edge_1RB_Left	21.82	15.52	16.12
n5	15	15	836.5	CP	QPSK	Edge_1RB_Right	21.62	15.32	15.92
n5	15	15	836.5	CP	QPSK	Outer_Full	22.51	16.21	16.81
n5	15	15	836.5	CP	16QAM	Inner_Full	23.18	16.88	17.48
n5	15	15	836.5	CP	16QAM	Edge_1RB_Left	22.08	15.78	16.38
n5	15	15	836.5	CP	16QAM	Edge_1RB_Right	21.95	15.65	16.25
n5	15	15	836.5	CP	16QAM	Outer_Full	22.45	16.15	16.75
n5	15	15	836.5	CP	64QAM	Inner_Full	22.94	16.64	17.24
n5	15	15	836.5	CP	64QAM	Edge_1RB_Left	21.13	14.83	15.43
n5	15	15	836.5	CP	64QAM	Edge_1RB_Right	20.88	14.58	15.18
n5	15	15	836.5	CP	64QAM	Outer_Full	22.51	16.21	16.81
n5	15	15	836.5	CP	256QAM	Inner_Full	20.30	14.00	14.60
n5	15	15	836.5	CP	256QAM	Edge_1RB_Left	18.06	11.76	12.36
n5	15	15	836.5	CP	256QAM	Edge_1RB_Right	17.86	11.56	12.16
n5	15	15	836.5	CP	256QAM	Outer_Full	20.03	13.73	14.33
n5	15	15	841.5	DFT	QPSK	Inner_Full	24.30	18.00	18.60
n5	15	15	841.5	DFT	QPSK	Edge_1RB_Left	21.71	15.41	16.01
n5	15	15	841.5	DFT	QPSK	Edge_1RB_Right	21.39	15.09	15.69
n5	15	15	841.5	DFT	QPSK	Outer_Full	24.10	17.80	18.40
n5	15	15	841.5	DFT	16QAM	Inner_Full	23.90	17.60	18.20
n5	15	15	841.5	DFT	16QAM	Edge_1RB_Left	22.92	16.62	17.22
n5	15	15	841.5	DFT	16QAM	Edge_1RB_Right	22.66	16.36	16.96
n5	15	15	841.5	DFT	16QAM	Outer_Full	23.09	16.79	17.39
n5	15	15	841.5	DFT	64QAM	Inner_Full	22.87	16.57	17.17
n5	15	15	841.5	DFT	64QAM	Edge_1RB_Left	22.10	15.80	16.40
n5	15	15	841.5	DFT	64QAM	Edge_1RB_Right	21.79	15.49	16.09
n5	15	15	841.5	DFT	64QAM	Outer_Full	22.61	16.31	16.91



BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n5	15	15	841.5	DFT	256QAM	Inner_Full	21.27	14.97	15.57
n5	15	15	841.5	DFT	256QAM	Edge_1RB_Left	19.95	13.65	14.25
n5	15	15	841.5	DFT	256QAM	Edge_1RB_Right	19.66	13.36	13.96
n5	15	15	841.5	DFT	256QAM	Outer_Full	21.15	14.85	15.45
n5	15	15	841.5	CP	QPSK	Inner_Full	23.62	17.32	17.92
n5	15	15	841.5	CP	QPSK	Edge_1RB_Left	21.72	15.42	16.02
n5	15	15	841.5	CP	QPSK	Edge_1RB_Right	21.46	15.16	15.76
n5	15	15	841.5	CP	QPSK	Outer_Full	22.58	16.28	16.88
n5	15	15	841.5	CP	16QAM	Inner_Full	23.18	16.88	17.48
n5	15	15	841.5	CP	16QAM	Edge_1RB_Left	22.17	15.87	16.47
n5	15	15	841.5	CP	16QAM	Edge_1RB_Right	21.85	15.55	16.15
n5	15	15	841.5	CP	16QAM	Outer_Full	22.49	16.19	16.79
n5	15	15	841.5	CP	64QAM	Inner_Full	22.76	16.46	17.06
n5	15	15	841.5	CP	64QAM	Edge_1RB_Left	21.03	14.73	15.33
n5	15	15	841.5	CP	64QAM	Edge_1RB_Right	20.70	14.40	15.00
n5	15	15	841.5	CP	64QAM	Outer_Full	22.63	16.33	16.93
n5	15	15	841.5	CP	256QAM	Inner_Full	20.31	14.01	14.61
n5	15	15	841.5	CP	256QAM	Edge_1RB_Left	17.98	11.68	12.28
n5	15	15	841.5	CP	256QAM	Edge_1RB_Right	17.74	11.44	12.04
n5	15	15	841.5	CP	256QAM	Outer_Full	20.11	13.81	14.41
n5	20	15	834	DFT	QPSK	Inner_Full	24.43	18.13	18.73
n5	20	15	834	DFT	QPSK	Edge_1RB_Left	21.85	15.55	16.15
n5	20	15	834	DFT	QPSK	Edge_1RB_Right	21.51	15.21	15.81
n5	20	15	834	DFT	QPSK	Outer_Full	23.66	17.36	17.96
n5	20	15	834	DFT	16QAM	Inner_Full	23.70	17.40	18.00
n5	20	15	834	DFT	16QAM	Edge_1RB_Left	22.81	16.51	17.11
n5	20	15	834	DFT	16QAM	Edge_1RB_Right	22.81	16.51	17.11
n5	20	15	834	DFT	16QAM	Outer_Full	22.83	16.53	17.13
n5	20	15	834	DFT	64QAM	Inner_Full	22.43	16.13	16.73
n5	20	15	834	DFT	64QAM	Edge_1RB_Left	21.91	15.61	16.21



BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n5	20	15	834	DFT	64QAM	Edge_1RB_Right	21.86	15.56	16.16
n5	20	15	834	DFT	64QAM	Outer_Full	22.37	16.07	16.67
n5	20	15	834	DFT	256QAM	Inner_Full	20.87	14.57	15.17
n5	20	15	834	DFT	256QAM	Edge_1RB_Left	20.00	13.70	14.30
n5	20	15	834	DFT	256QAM	Edge_1RB_Right	19.74	13.44	14.04
n5	20	15	834	DFT	256QAM	Outer_Full	20.82	14.52	15.12
n5	20	15	834	CP	QPSK	Inner_Full	23.36	17.06	17.66
n5	20	15	834	CP	QPSK	Edge_1RB_Left	21.81	15.51	16.11
n5	20	15	834	CP	QPSK	Edge_1RB_Right	21.57	15.27	15.87
n5	20	15	834	CP	QPSK	Outer_Full	22.25	15.95	16.55
n5	20	15	834	CP	16QAM	Inner_Full	22.88	16.58	17.18
n5	20	15	834	CP	16QAM	Edge_1RB_Left	22.13	15.83	16.43
n5	20	15	834	CP	16QAM	Edge_1RB_Right	21.96	15.66	16.26
n5	20	15	834	CP	16QAM	Outer_Full	22.23	15.93	16.53
n5	20	15	834	CP	64QAM	Inner_Full	22.52	16.22	16.82
n5	20	15	834	CP	64QAM	Edge_1RB_Left	21.07	14.77	15.37
n5	20	15	834	CP	64QAM	Edge_1RB_Right	20.96	14.66	15.26
n5	20	15	834	CP	64QAM	Outer_Full	22.32	16.02	16.62
n5	20	15	834	CP	256QAM	Inner_Full	19.98	13.68	14.28
n5	20	15	834	CP	256QAM	Edge_1RB_Left	17.90	11.60	12.20
n5	20	15	834	CP	256QAM	Edge_1RB_Right	17.81	11.51	12.11
n5	20	15	834	CP	256QAM	Outer_Full	19.85	13.55	14.15
n5	20	15	836.5	DFT	QPSK	Inner_Full	24.30	18.00	18.60
n5	20	15	836.5	DFT	QPSK	Edge_1RB_Left	21.80	15.50	16.10
n5	20	15	836.5	DFT	QPSK	Edge_1RB_Right	21.48	15.18	15.78
n5	20	15	836.5	DFT	QPSK	Outer_Full	23.78	17.48	18.08
n5	20	15	836.5	DFT	16QAM	Inner_Full	23.91	17.61	18.21
n5	20	15	836.5	DFT	16QAM	Edge_1RB_Left	22.61	16.31	16.91
n5	20	15	836.5	DFT	16QAM	Edge_1RB_Right	22.68	16.38	16.98
n5	20	15	836.5	DFT	16QAM	Outer_Full	22.83	16.53	17.13



BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n5	20	15	836.5	DFT	64QAM	Inner_Full	22.81	16.51	17.11
n5	20	15	836.5	DFT	64QAM	Edge_1RB_Left	21.65	15.35	15.95
n5	20	15	836.5	DFT	64QAM	Edge_1RB_Right	21.83	15.53	16.13
n5	20	15	836.5	DFT	64QAM	Outer_Full	22.42	16.12	16.72
n5	20	15	836.5	DFT	256QAM	Inner_Full	21.15	14.85	15.45
n5	20	15	836.5	DFT	256QAM	Edge_1RB_Left	19.97	13.67	14.27
n5	20	15	836.5	DFT	256QAM	Edge_1RB_Right	19.70	13.40	14.00
n5	20	15	836.5	DFT	256QAM	Outer_Full	20.84	14.54	15.14
n5	20	15	836.5	CP	QPSK	Inner_Full	23.61	17.31	17.91
n5	20	15	836.5	CP	QPSK	Edge_1RB_Left	21.71	15.41	16.01
n5	20	15	836.5	CP	QPSK	Edge_1RB_Right	21.51	15.21	15.81
n5	20	15	836.5	CP	QPSK	Outer_Full	22.33	16.03	16.63
n5	20	15	836.5	CP	16QAM	Inner_Full	23.05	16.75	17.35
n5	20	15	836.5	CP	16QAM	Edge_1RB_Left	22.08	15.78	16.38
n5	20	15	836.5	CP	16QAM	Edge_1RB_Right	21.86	15.56	16.16
n5	20	15	836.5	CP	16QAM	Outer_Full	22.29	15.99	16.59
n5	20	15	836.5	CP	64QAM	Inner_Full	22.82	16.52	17.12
n5	20	15	836.5	CP	64QAM	Edge_1RB_Left	21.06	14.76	15.36
n5	20	15	836.5	CP	64QAM	Edge_1RB_Right	20.81	14.51	15.11
n5	20	15	836.5	CP	64QAM	Outer_Full	22.35	16.05	16.65
n5	20	15	836.5	CP	256QAM	Inner_Full	20.24	13.94	14.54
n5	20	15	836.5	CP	256QAM	Edge_1RB_Left	17.94	11.64	12.24
n5	20	15	836.5	CP	256QAM	Edge_1RB_Right	17.78	11.48	12.08
n5	20	15	836.5	CP	256QAM	Outer_Full	19.90	13.60	14.20
n5	20	15	839	DFT	QPSK	Inner_Full	24.24	17.94	18.54
n5	20	15	839	DFT	QPSK	Edge_1RB_Left	21.73	15.43	16.03
n5	20	15	839	DFT	QPSK	Edge_1RB_Right	21.32	15.02	15.62
n5	20	15	839	DFT	QPSK	Outer_Full	23.88	17.58	18.18
n5	20	15	839	DFT	16QAM	Inner_Full	23.95	17.65	18.25
n5	20	15	839	DFT	16QAM	Edge_1RB_Left	22.32	16.02	16.62



BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n5	20	15	839	DFT	16QAM	Edge_1RB_Right	22.63	16.33	16.93
n5	20	15	839	DFT	16QAM	Outer_Full	22.91	16.61	17.21
n5	20	15	839	DFT	64QAM	Inner_Full	22.84	16.54	17.14
n5	20	15	839	DFT	64QAM	Edge_1RB_Left	21.40	15.10	15.70
n5	20	15	839	DFT	64QAM	Edge_1RB_Right	21.76	15.46	16.06
n5	20	15	839	DFT	64QAM	Outer_Full	22.46	16.16	16.76
n5	20	15	839	DFT	256QAM	Inner_Full	21.16	14.86	15.46
n5	20	15	839	DFT	256QAM	Edge_1RB_Left	19.82	13.52	14.12
n5	20	15	839	DFT	256QAM	Edge_1RB_Right	19.58	13.28	13.88
n5	20	15	839	DFT	256QAM	Outer_Full	20.96	14.66	15.26
n5	20	15	839	CP	QPSK	Inner_Full	23.71	17.41	18.01
n5	20	15	839	CP	QPSK	Edge_1RB_Left	21.53	15.23	15.83
n5	20	15	839	CP	QPSK	Edge_1RB_Right	21.43	15.13	15.73
n5	20	15	839	CP	QPSK	Outer_Full	22.40	16.10	16.70
n5	20	15	839	CP	16QAM	Inner_Full	23.19	16.89	17.49
n5	20	15	839	CP	16QAM	Edge_1RB_Left	21.83	15.53	16.13
n5	20	15	839	CP	16QAM	Edge_1RB_Right	21.81	15.51	16.11
n5	20	15	839	CP	16QAM	Outer_Full	22.32	16.02	16.62
n5	20	15	839	CP	64QAM	Inner_Full	23.00	16.70	17.30
n5	20	15	839	CP	64QAM	Edge_1RB_Left	21.05	14.75	15.35
n5	20	15	839	CP	64QAM	Edge_1RB_Right	20.68	14.38	14.98
n5	20	15	839	CP	64QAM	Outer_Full	22.42	16.12	16.72
n5	20	15	839	CP	256QAM	Inner_Full	20.18	13.88	14.48
n5	20	15	839	CP	256QAM	Edge_1RB_Left	18.00	11.70	12.30
n5	20	15	839	CP	256QAM	Edge_1RB_Right	17.73	11.43	12.03
n5	20	15	839	CP	256QAM	Outer_Full	19.99	13.69	14.29



n7

BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n7	5	15	2502.5	DFT	QPSK	Inner_Full	23.01	20.91	21.81
n7	5	15	2502.5	DFT	QPSK	Edge_1RB_Left	20.61	18.51	19.41
n7	5	15	2502.5	DFT	QPSK	Edge_1RB_Right	20.59	18.49	19.39
n7	5	15	2502.5	DFT	QPSK	Outer_Full	21.97	19.87	20.77
n7	5	15	2502.5	DFT	16QAM	Inner_Full	21.87	19.77	20.67
n7	5	15	2502.5	DFT	16QAM	Edge_1RB_Left	21.01	18.91	19.81
n7	5	15	2502.5	DFT	16QAM	Edge_1RB_Right	20.98	18.88	19.78
n7	5	15	2502.5	DFT	16QAM	Outer_Full	20.76	18.66	19.56
n7	5	15	2502.5	DFT	64QAM	Inner_Full	20.39	18.29	19.19
n7	5	15	2502.5	DFT	64QAM	Edge_1RB_Left	20.02	17.92	18.82
n7	5	15	2502.5	DFT	64QAM	Edge_1RB_Right	20.09	17.99	18.89
n7	5	15	2502.5	DFT	64QAM	Outer_Full	20.48	18.38	19.28
n7	5	15	2502.5	DFT	256QAM	Inner_Full	17.76	15.66	16.56
n7	5	15	2502.5	DFT	256QAM	Edge_1RB_Left	17.44	15.34	16.24
n7	5	15	2502.5	DFT	256QAM	Edge_1RB_Right	17.45	15.35	16.25
n7	5	15	2502.5	DFT	256QAM	Outer_Full	17.82	15.72	16.62
n7	5	15	2502.5	CP	QPSK	Inner_Full	21.57	19.47	20.37
n7	5	15	2502.5	CP	QPSK	Edge_1RB_Left	19.85	17.75	18.65
n7	5	15	2502.5	CP	QPSK	Edge_1RB_Right	19.84	17.74	18.64
n7	5	15	2502.5	CP	QPSK	Outer_Full	19.39	17.29	18.19
n7	5	15	2502.5	CP	16QAM	Inner_Full	21.02	18.92	19.82
n7	5	15	2502.5	CP	16QAM	Edge_1RB_Left	20.26	18.16	19.06
n7	5	15	2502.5	CP	16QAM	Edge_1RB_Right	20.24	18.14	19.04
n7	5	15	2502.5	CP	16QAM	Outer_Full	19.42	17.32	18.22
n7	5	15	2502.5	CP	64QAM	Inner_Full	19.23	17.13	18.03
n7	5	15	2502.5	CP	64QAM	Edge_1RB_Left	18.95	16.85	17.75
n7	5	15	2502.5	CP	64QAM	Edge_1RB_Right	19.04	16.94	17.84
n7	5	15	2502.5	CP	64QAM	Outer_Full	18.43	16.33	17.23



BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n7	5	15	2502.5	CP	256QAM	Inner_Full	16.39	14.29	15.19
n7	5	15	2502.5	CP	256QAM	Edge_1RB_Left	16.06	13.96	14.86
n7	5	15	2502.5	CP	256QAM	Edge_1RB_Right	16.00	13.90	14.80
n7	5	15	2502.5	CP	256QAM	Outer_Full	16.31	14.21	15.11
n7	5	15	2535	DFT	QPSK	Inner_Full	23.12	21.02	21.92
n7	5	15	2535	DFT	QPSK	Edge_1RB_Left	20.59	18.49	19.39
n7	5	15	2535	DFT	QPSK	Edge_1RB_Right	20.62	18.52	19.42
n7	5	15	2535	DFT	QPSK	Outer_Full	22.01	19.91	20.81
n7	5	15	2535	DFT	16QAM	Inner_Full	21.92	19.82	20.72
n7	5	15	2535	DFT	16QAM	Edge_1RB_Left	21.09	18.99	19.89
n7	5	15	2535	DFT	16QAM	Edge_1RB_Right	21.09	18.99	19.89
n7	5	15	2535	DFT	16QAM	Outer_Full	20.88	18.78	19.68
n7	5	15	2535	DFT	64QAM	Inner_Full	20.43	18.33	19.23
n7	5	15	2535	DFT	64QAM	Edge_1RB_Left	20.24	18.14	19.04
n7	5	15	2535	DFT	64QAM	Edge_1RB_Right	20.20	18.10	19.00
n7	5	15	2535	DFT	64QAM	Outer_Full	20.48	18.38	19.28
n7	5	15	2535	DFT	256QAM	Inner_Full	17.89	15.79	16.69
n7	5	15	2535	DFT	256QAM	Edge_1RB_Left	17.48	15.38	16.28
n7	5	15	2535	DFT	256QAM	Edge_1RB_Right	17.50	15.40	16.30
n7	5	15	2535	DFT	256QAM	Outer_Full	17.80	15.70	16.60
n7	5	15	2535	CP	QPSK	Inner_Full	21.59	19.49	20.39
n7	5	15	2535	CP	QPSK	Edge_1RB_Left	19.86	17.76	18.66
n7	5	15	2535	CP	QPSK	Edge_1RB_Right	19.85	17.75	18.65
n7	5	15	2535	CP	QPSK	Outer_Full	19.42	17.32	18.22
n7	5	15	2535	CP	16QAM	Inner_Full	21.07	18.97	19.87
n7	5	15	2535	CP	16QAM	Edge_1RB_Left	20.31	18.21	19.11
n7	5	15	2535	CP	16QAM	Edge_1RB_Right	20.28	18.18	19.08
n7	5	15	2535	CP	16QAM	Outer_Full	19.48	17.38	18.28
n7	5	15	2535	CP	64QAM	Inner_Full	19.29	17.19	18.09
n7	5	15	2535	CP	64QAM	Edge_1RB_Left	19.07	16.97	17.87



BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n7	5	15	2535	CP	64QAM	Edge_1RB_Right	19.06	16.96	17.86
n7	5	15	2535	CP	64QAM	Outer_Full	18.42	16.32	17.22
n7	5	15	2535	CP	256QAM	Inner_Full	16.49	14.39	15.29
n7	5	15	2535	CP	256QAM	Edge_1RB_Left	16.11	14.01	14.91
n7	5	15	2535	CP	256QAM	Edge_1RB_Right	16.14	14.04	14.94
n7	5	15	2535	CP	256QAM	Outer_Full	16.35	14.25	15.15
n7	5	15	2567.5	DFT	QPSK	Inner_Full	23.02	20.92	21.82
n7	5	15	2567.5	DFT	QPSK	Edge_1RB_Left	20.53	18.43	19.33
n7	5	15	2567.5	DFT	QPSK	Edge_1RB_Right	20.53	18.43	19.33
n7	5	15	2567.5	DFT	QPSK	Outer_Full	21.93	19.83	20.73
n7	5	15	2567.5	DFT	16QAM	Inner_Full	21.80	19.70	20.60
n7	5	15	2567.5	DFT	16QAM	Edge_1RB_Left	20.97	18.87	19.77
n7	5	15	2567.5	DFT	16QAM	Edge_1RB_Right	21.01	18.91	19.81
n7	5	15	2567.5	DFT	16QAM	Outer_Full	20.77	18.67	19.57
n7	5	15	2567.5	DFT	64QAM	Inner_Full	20.40	18.30	19.20
n7	5	15	2567.5	DFT	64QAM	Edge_1RB_Left	20.14	18.04	18.94
n7	5	15	2567.5	DFT	64QAM	Edge_1RB_Right	20.10	18.00	18.90
n7	5	15	2567.5	DFT	64QAM	Outer_Full	20.43	18.33	19.23
n7	5	15	2567.5	DFT	256QAM	Inner_Full	17.69	15.59	16.49
n7	5	15	2567.5	DFT	256QAM	Edge_1RB_Left	17.38	15.28	16.18
n7	5	15	2567.5	DFT	256QAM	Edge_1RB_Right	17.39	15.29	16.19
n7	5	15	2567.5	DFT	256QAM	Outer_Full	17.72	15.62	16.52
n7	5	15	2567.5	CP	QPSK	Inner_Full	21.42	19.32	20.22
n7	5	15	2567.5	CP	QPSK	Edge_1RB_Left	19.75	17.65	18.55
n7	5	15	2567.5	CP	QPSK	Edge_1RB_Right	19.76	17.66	18.56
n7	5	15	2567.5	CP	QPSK	Outer_Full	19.34	17.24	18.14
n7	5	15	2567.5	CP	16QAM	Inner_Full	20.99	18.89	19.79
n7	5	15	2567.5	CP	16QAM	Edge_1RB_Left	20.20	18.10	19.00
n7	5	15	2567.5	CP	16QAM	Edge_1RB_Right	20.25	18.15	19.05
n7	5	15	2567.5	CP	16QAM	Outer_Full	19.41	17.31	18.21



BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n7	5	15	2567.5	CP	64QAM	Inner_Full	19.24	17.14	18.04
n7	5	15	2567.5	CP	64QAM	Edge_1RB_Left	18.96	16.86	17.76
n7	5	15	2567.5	CP	64QAM	Edge_1RB_Right	18.96	16.86	17.76
n7	5	15	2567.5	CP	64QAM	Outer_Full	18.39	16.29	17.19
n7	5	15	2567.5	CP	256QAM	Inner_Full	16.36	14.26	15.16
n7	5	15	2567.5	CP	256QAM	Edge_1RB_Left	16.00	13.90	14.80
n7	5	15	2567.5	CP	256QAM	Edge_1RB_Right	15.98	13.88	14.78
n7	5	15	2567.5	CP	256QAM	Outer_Full	16.33	14.23	15.13
n7	10	15	2505	DFT	QPSK	Inner_Full	23.03	20.93	21.83
n7	10	15	2505	DFT	QPSK	Edge_1RB_Left	20.45	18.35	19.25
n7	10	15	2505	DFT	QPSK	Edge_1RB_Right	20.50	18.40	19.30
n7	10	15	2505	DFT	QPSK	Outer_Full	21.93	19.83	20.73
n7	10	15	2505	DFT	16QAM	Inner_Full	21.80	19.70	20.60
n7	10	15	2505	DFT	16QAM	Edge_1RB_Left	20.93	18.83	19.73
n7	10	15	2505	DFT	16QAM	Edge_1RB_Right	20.98	18.88	19.78
n7	10	15	2505	DFT	16QAM	Outer_Full	20.70	18.60	19.50
n7	10	15	2505	DFT	64QAM	Inner_Full	20.43	18.33	19.23
n7	10	15	2505	DFT	64QAM	Edge_1RB_Left	20.08	17.98	18.88
n7	10	15	2505	DFT	64QAM	Edge_1RB_Right	20.18	18.08	18.98
n7	10	15	2505	DFT	64QAM	Outer_Full	20.30	18.20	19.10
n7	10	15	2505	DFT	256QAM	Inner_Full	17.75	15.65	16.55
n7	10	15	2505	DFT	256QAM	Edge_1RB_Left	17.45	15.35	16.25
n7	10	15	2505	DFT	256QAM	Edge_1RB_Right	17.41	15.31	16.21
n7	10	15	2505	DFT	256QAM	Outer_Full	17.77	15.67	16.57
n7	10	15	2505	CP	QPSK	Inner_Full	21.39	19.29	20.19
n7	10	15	2505	CP	QPSK	Edge_1RB_Left	19.80	17.70	18.60
n7	10	15	2505	CP	QPSK	Edge_1RB_Right	19.82	17.72	18.62
n7	10	15	2505	CP	QPSK	Outer_Full	19.38	17.28	18.18
n7	10	15	2505	CP	16QAM	Inner_Full	20.88	18.78	19.68
n7	10	15	2505	CP	16QAM	Edge_1RB_Left	20.07	17.97	18.87



BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n7	10	15	2505	CP	16QAM	Edge_1RB_Right	20.19	18.09	18.99
n7	10	15	2505	CP	16QAM	Outer_Full	19.45	17.35	18.25
n7	10	15	2505	CP	64QAM	Inner_Full	19.28	17.18	18.08
n7	10	15	2505	CP	64QAM	Edge_1RB_Left	18.89	16.79	17.69
n7	10	15	2505	CP	64QAM	Edge_1RB_Right	18.99	16.89	17.79
n7	10	15	2505	CP	64QAM	Outer_Full	18.39	16.29	17.19
n7	10	15	2505	CP	256QAM	Inner_Full	16.23	14.13	15.03
n7	10	15	2505	CP	256QAM	Edge_1RB_Left	15.94	13.84	14.74
n7	10	15	2505	CP	256QAM	Edge_1RB_Right	15.98	13.88	14.78
n7	10	15	2505	CP	256QAM	Outer_Full	16.25	14.15	15.05
n7	10	15	2535	DFT	QPSK	Inner_Full	23.09	20.99	21.89
n7	10	15	2535	DFT	QPSK	Edge_1RB_Left	20.64	18.54	19.44
n7	10	15	2535	DFT	QPSK	Edge_1RB_Right	20.64	18.54	19.44
n7	10	15	2535	DFT	QPSK	Outer_Full	21.96	19.86	20.76
n7	10	15	2535	DFT	16QAM	Inner_Full	21.87	19.77	20.67
n7	10	15	2535	DFT	16QAM	Edge_1RB_Left	21.04	18.94	19.84
n7	10	15	2535	DFT	16QAM	Edge_1RB_Right	20.95	18.85	19.75
n7	10	15	2535	DFT	16QAM	Outer_Full	20.86	18.76	19.66
n7	10	15	2535	DFT	64QAM	Inner_Full	20.43	18.33	19.23
n7	10	15	2535	DFT	64QAM	Edge_1RB_Left	20.20	18.10	19.00
n7	10	15	2535	DFT	64QAM	Edge_1RB_Right	20.06	17.96	18.86
n7	10	15	2535	DFT	64QAM	Outer_Full	20.42	18.32	19.22
n7	10	15	2535	DFT	256QAM	Inner_Full	17.73	15.63	16.53
n7	10	15	2535	DFT	256QAM	Edge_1RB_Left	17.51	15.41	16.31
n7	10	15	2535	DFT	256QAM	Edge_1RB_Right	17.44	15.34	16.24
n7	10	15	2535	DFT	256QAM	Outer_Full	17.88	15.78	16.68
n7	10	15	2535	CP	QPSK	Inner_Full	21.53	19.43	20.33
n7	10	15	2535	CP	QPSK	Edge_1RB_Left	19.89	17.79	18.69
n7	10	15	2535	CP	QPSK	Edge_1RB_Right	19.87	17.77	18.67
n7	10	15	2535	CP	QPSK	Outer_Full	19.49	17.39	18.29



BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n7	10	15	2535	CP	16QAM	Inner_Full	20.92	18.82	19.72
n7	10	15	2535	CP	16QAM	Edge_1RB_Left	20.19	18.09	18.99
n7	10	15	2535	CP	16QAM	Edge_1RB_Right	20.15	18.05	18.95
n7	10	15	2535	CP	16QAM	Outer_Full	19.52	17.42	18.32
n7	10	15	2535	CP	64QAM	Inner_Full	19.39	17.29	18.19
n7	10	15	2535	CP	64QAM	Edge_1RB_Left	19.00	16.90	17.80
n7	10	15	2535	CP	64QAM	Edge_1RB_Right	18.98	16.88	17.78
n7	10	15	2535	CP	64QAM	Outer_Full	18.43	16.33	17.23
n7	10	15	2535	CP	256QAM	Inner_Full	16.35	14.25	15.15
n7	10	15	2535	CP	256QAM	Edge_1RB_Left	16.01	13.91	14.81
n7	10	15	2535	CP	256QAM	Edge_1RB_Right	15.92	13.82	14.72
n7	10	15	2535	CP	256QAM	Outer_Full	16.31	14.21	15.11
n7	10	15	2565	DFT	QPSK	Inner_Full	22.86	20.76	21.66
n7	10	15	2565	DFT	QPSK	Edge_1RB_Left	20.61	18.51	19.41
n7	10	15	2565	DFT	QPSK	Edge_1RB_Right	20.54	18.44	19.34
n7	10	15	2565	DFT	QPSK	Outer_Full	21.88	19.78	20.68
n7	10	15	2565	DFT	16QAM	Inner_Full	21.81	19.71	20.61
n7	10	15	2565	DFT	16QAM	Edge_1RB_Left	21.04	18.94	19.84
n7	10	15	2565	DFT	16QAM	Edge_1RB_Right	20.97	18.87	19.77
n7	10	15	2565	DFT	16QAM	Outer_Full	20.72	18.62	19.52
n7	10	15	2565	DFT	64QAM	Inner_Full	20.39	18.29	19.19
n7	10	15	2565	DFT	64QAM	Edge_1RB_Left	20.18	18.08	18.98
n7	10	15	2565	DFT	64QAM	Edge_1RB_Right	20.09	17.99	18.89
n7	10	15	2565	DFT	64QAM	Outer_Full	20.33	18.23	19.13
n7	10	15	2565	DFT	256QAM	Inner_Full	17.66	15.56	16.46
n7	10	15	2565	DFT	256QAM	Edge_1RB_Left	17.47	15.37	16.27
n7	10	15	2565	DFT	256QAM	Edge_1RB_Right	17.35	15.25	16.15
n7	10	15	2565	DFT	256QAM	Outer_Full	17.76	15.66	16.56
n7	10	15	2565	CP	QPSK	Inner_Full	21.31	19.21	20.11
n7	10	15	2565	CP	QPSK	Edge_1RB_Left	19.78	17.68	18.58



BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n7	10	15	2565	CP	QPSK	Edge_1RB_Right	19.75	17.65	18.55
n7	10	15	2565	CP	QPSK	Outer_Full	19.38	17.28	18.18
n7	10	15	2565	CP	16QAM	Inner_Full	20.89	18.79	19.69
n7	10	15	2565	CP	16QAM	Edge_1RB_Left	20.23	18.13	19.03
n7	10	15	2565	CP	16QAM	Edge_1RB_Right	20.15	18.05	18.95
n7	10	15	2565	CP	16QAM	Outer_Full	19.46	17.36	18.26
n7	10	15	2565	CP	64QAM	Inner_Full	19.34	17.24	18.14
n7	10	15	2565	CP	64QAM	Edge_1RB_Left	18.99	16.89	17.79
n7	10	15	2565	CP	64QAM	Edge_1RB_Right	18.99	16.89	17.79
n7	10	15	2565	CP	64QAM	Outer_Full	18.38	16.28	17.18
n7	10	15	2565	CP	256QAM	Inner_Full	16.30	14.20	15.10
n7	10	15	2565	CP	256QAM	Edge_1RB_Left	16.04	13.94	14.84
n7	10	15	2565	CP	256QAM	Edge_1RB_Right	15.92	13.82	14.72
n7	10	15	2565	CP	256QAM	Outer_Full	16.26	14.16	15.06
n7	15	15	2507.5	DFT	QPSK	Inner_Full	23.05	20.95	21.85
n7	15	15	2507.5	DFT	QPSK	Edge_1RB_Left	20.48	18.38	19.28
n7	15	15	2507.5	DFT	QPSK	Edge_1RB_Right	20.55	18.45	19.35
n7	15	15	2507.5	DFT	QPSK	Outer_Full	21.88	19.78	20.68
n7	15	15	2507.5	DFT	16QAM	Inner_Full	21.69	19.59	20.49
n7	15	15	2507.5	DFT	16QAM	Edge_1RB_Left	20.96	18.86	19.76
n7	15	15	2507.5	DFT	16QAM	Edge_1RB_Right	21.04	18.94	19.84
n7	15	15	2507.5	DFT	16QAM	Outer_Full	20.66	18.56	19.46
n7	15	15	2507.5	DFT	64QAM	Inner_Full	20.28	18.18	19.08
n7	15	15	2507.5	DFT	64QAM	Edge_1RB_Left	20.09	17.99	18.89
n7	15	15	2507.5	DFT	64QAM	Edge_1RB_Right	20.14	18.04	18.94
n7	15	15	2507.5	DFT	64QAM	Outer_Full	20.21	18.11	19.01
n7	15	15	2507.5	DFT	256QAM	Inner_Full	17.68	15.58	16.48
n7	15	15	2507.5	DFT	256QAM	Edge_1RB_Left	17.43	15.33	16.23
n7	15	15	2507.5	DFT	256QAM	Edge_1RB_Right	17.40	15.30	16.20
n7	15	15	2507.5	DFT	256QAM	Outer_Full	17.67	15.57	16.47



BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n7	15	15	2507.5	CP	QPSK	Inner_Full	21.64	19.54	20.44
n7	15	15	2507.5	CP	QPSK	Edge_1RB_Left	19.74	17.64	18.54
n7	15	15	2507.5	CP	QPSK	Edge_1RB_Right	19.80	17.70	18.60
n7	15	15	2507.5	CP	QPSK	Outer_Full	19.45	17.35	18.25
n7	15	15	2507.5	CP	16QAM	Inner_Full	21.02	18.92	19.82
n7	15	15	2507.5	CP	16QAM	Edge_1RB_Left	20.08	17.98	18.88
n7	15	15	2507.5	CP	16QAM	Edge_1RB_Right	20.19	18.09	18.99
n7	15	15	2507.5	CP	16QAM	Outer_Full	19.31	17.21	18.11
n7	15	15	2507.5	CP	64QAM	Inner_Full	19.30	17.20	18.10
n7	15	15	2507.5	CP	64QAM	Edge_1RB_Left	18.99	16.89	17.79
n7	15	15	2507.5	CP	64QAM	Edge_1RB_Right	19.09	16.99	17.89
n7	15	15	2507.5	CP	64QAM	Outer_Full	18.28	16.18	17.08
n7	15	15	2507.5	CP	256QAM	Inner_Full	16.27	14.17	15.07
n7	15	15	2507.5	CP	256QAM	Edge_1RB_Left	15.99	13.89	14.79
n7	15	15	2507.5	CP	256QAM	Edge_1RB_Right	16.00	13.90	14.80
n7	15	15	2507.5	CP	256QAM	Outer_Full	16.23	14.13	15.03
n7	15	15	2535	DFT	QPSK	Inner_Full	23.02	20.92	21.82
n7	15	15	2535	DFT	QPSK	Edge_1RB_Left	20.67	18.57	19.47
n7	15	15	2535	DFT	QPSK	Edge_1RB_Right	20.70	18.60	19.50
n7	15	15	2535	DFT	QPSK	Outer_Full	21.97	19.87	20.77
n7	15	15	2535	DFT	16QAM	Inner_Full	21.83	19.73	20.63
n7	15	15	2535	DFT	16QAM	Edge_1RB_Left	21.04	18.94	19.84
n7	15	15	2535	DFT	16QAM	Edge_1RB_Right	21.13	19.03	19.93
n7	15	15	2535	DFT	16QAM	Outer_Full	20.92	18.82	19.72
n7	15	15	2535	DFT	64QAM	Inner_Full	20.42	18.32	19.22
n7	15	15	2535	DFT	64QAM	Edge_1RB_Left	20.14	18.04	18.94
n7	15	15	2535	DFT	64QAM	Edge_1RB_Right	20.26	18.16	19.06
n7	15	15	2535	DFT	64QAM	Outer_Full	20.44	18.34	19.24
n7	15	15	2535	DFT	256QAM	Inner_Full	17.79	15.69	16.59
n7	15	15	2535	DFT	256QAM	Edge_1RB_Left	17.65	15.55	16.45



BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n7	15	15	2535	DFT	256QAM	Edge_1RB_Right	17.56	15.46	16.36
n7	15	15	2535	DFT	256QAM	Outer_Full	17.86	15.76	16.66
n7	15	15	2535	CP	QPSK	Inner_Full	21.60	19.50	20.40
n7	15	15	2535	CP	QPSK	Edge_1RB_Left	19.91	17.81	18.71
n7	15	15	2535	CP	QPSK	Edge_1RB_Right	19.90	17.80	18.70
n7	15	15	2535	CP	QPSK	Outer_Full	19.54	17.44	18.34
n7	15	15	2535	CP	16QAM	Inner_Full	21.10	19.00	19.90
n7	15	15	2535	CP	16QAM	Edge_1RB_Left	20.21	18.11	19.01
n7	15	15	2535	CP	16QAM	Edge_1RB_Right	20.31	18.21	19.11
n7	15	15	2535	CP	16QAM	Outer_Full	19.50	17.40	18.30
n7	15	15	2535	CP	64QAM	Inner_Full	19.46	17.36	18.26
n7	15	15	2535	CP	64QAM	Edge_1RB_Left	19.13	17.03	17.93
n7	15	15	2535	CP	64QAM	Edge_1RB_Right	19.15	17.05	17.95
n7	15	15	2535	CP	64QAM	Outer_Full	18.45	16.35	17.25
n7	15	15	2535	CP	256QAM	Inner_Full	16.37	14.27	15.17
n7	15	15	2535	CP	256QAM	Edge_1RB_Left	16.14	14.04	14.94
n7	15	15	2535	CP	256QAM	Edge_1RB_Right	16.18	14.08	14.98
n7	15	15	2535	CP	256QAM	Outer_Full	16.33	14.23	15.13
n7	15	15	2562.5	DFT	QPSK	Inner_Full	23.05	20.95	21.85
n7	15	15	2562.5	DFT	QPSK	Edge_1RB_Left	20.74	18.64	19.54
n7	15	15	2562.5	DFT	QPSK	Edge_1RB_Right	20.60	18.50	19.40
n7	15	15	2562.5	DFT	QPSK	Outer_Full	21.94	19.84	20.74
n7	15	15	2562.5	DFT	16QAM	Inner_Full	21.75	19.65	20.55
n7	15	15	2562.5	DFT	16QAM	Edge_1RB_Left	21.07	18.97	19.87
n7	15	15	2562.5	DFT	16QAM	Edge_1RB_Right	21.03	18.93	19.83
n7	15	15	2562.5	DFT	16QAM	Outer_Full	20.82	18.72	19.62
n7	15	15	2562.5	DFT	64QAM	Inner_Full	20.34	18.24	19.14
n7	15	15	2562.5	DFT	64QAM	Edge_1RB_Left	20.21	18.11	19.01
n7	15	15	2562.5	DFT	64QAM	Edge_1RB_Right	20.05	17.95	18.85
n7	15	15	2562.5	DFT	64QAM	Outer_Full	20.42	18.32	19.22



BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n7	15	15	2562.5	DFT	256QAM	Inner_Full	17.84	15.74	16.64
n7	15	15	2562.5	DFT	256QAM	Edge_1RB_Left	17.61	15.51	16.41
n7	15	15	2562.5	DFT	256QAM	Edge_1RB_Right	17.45	15.35	16.25
n7	15	15	2562.5	DFT	256QAM	Outer_Full	17.72	15.62	16.52
n7	15	15	2562.5	CP	QPSK	Inner_Full	21.67	19.57	20.47
n7	15	15	2562.5	CP	QPSK	Edge_1RB_Left	19.97	17.87	18.77
n7	15	15	2562.5	CP	QPSK	Edge_1RB_Right	19.85	17.75	18.65
n7	15	15	2562.5	CP	QPSK	Outer_Full	19.40	17.30	18.20
n7	15	15	2562.5	CP	16QAM	Inner_Full	21.05	18.95	19.85
n7	15	15	2562.5	CP	16QAM	Edge_1RB_Left	20.24	18.14	19.04
n7	15	15	2562.5	CP	16QAM	Edge_1RB_Right	20.22	18.12	19.02
n7	15	15	2562.5	CP	16QAM	Outer_Full	19.40	17.30	18.20
n7	15	15	2562.5	CP	64QAM	Inner_Full	19.42	17.32	18.22
n7	15	15	2562.5	CP	64QAM	Edge_1RB_Left	19.12	17.02	17.92
n7	15	15	2562.5	CP	64QAM	Edge_1RB_Right	19.09	16.99	17.89
n7	15	15	2562.5	CP	64QAM	Outer_Full	18.37	16.27	17.17
n7	15	15	2562.5	CP	256QAM	Inner_Full	16.30	14.20	15.10
n7	15	15	2562.5	CP	256QAM	Edge_1RB_Left	16.12	14.02	14.92
n7	15	15	2562.5	CP	256QAM	Edge_1RB_Right	16.00	13.90	14.80
n7	15	15	2562.5	CP	256QAM	Outer_Full	16.26	14.16	15.06
n7	20	15	2510	DFT	QPSK	Inner_Full	22.98	20.88	21.78
n7	20	15	2510	DFT	QPSK	Edge_1RB_Left	20.46	18.36	19.26
n7	20	15	2510	DFT	QPSK	Edge_1RB_Right	20.55	18.45	19.35
n7	20	15	2510	DFT	QPSK	Outer_Full	21.99	19.89	20.79
n7	20	15	2510	DFT	16QAM	Inner_Full	21.68	19.58	20.48
n7	20	15	2510	DFT	16QAM	Edge_1RB_Left	20.90	18.80	19.70
n7	20	15	2510	DFT	16QAM	Edge_1RB_Right	21.03	18.93	19.83
n7	20	15	2510	DFT	16QAM	Outer_Full	20.71	18.61	19.51
n7	20	15	2510	DFT	64QAM	Inner_Full	20.22	18.12	19.02
n7	20	15	2510	DFT	64QAM	Edge_1RB_Left	20.08	17.98	18.88



BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n7	20	15	2510	DFT	64QAM	Edge_1RB_Right	20.13	18.03	18.93
n7	20	15	2510	DFT	64QAM	Outer_Full	20.37	18.27	19.17
n7	20	15	2510	DFT	256QAM	Inner_Full	17.74	15.64	16.54
n7	20	15	2510	DFT	256QAM	Edge_1RB_Left	17.33	15.23	16.13
n7	20	15	2510	DFT	256QAM	Edge_1RB_Right	17.47	15.37	16.27
n7	20	15	2510	DFT	256QAM	Outer_Full	17.75	15.65	16.55
n7	20	15	2510	CP	QPSK	Inner_Full	21.50	19.40	20.30
n7	20	15	2510	CP	QPSK	Edge_1RB_Left	19.66	17.56	18.46
n7	20	15	2510	CP	QPSK	Edge_1RB_Right	19.88	17.78	18.68
n7	20	15	2510	CP	QPSK	Outer_Full	19.38	17.28	18.18
n7	20	15	2510	CP	16QAM	Inner_Full	20.91	18.81	19.71
n7	20	15	2510	CP	16QAM	Edge_1RB_Left	20.05	17.95	18.85
n7	20	15	2510	CP	16QAM	Edge_1RB_Right	20.31	18.21	19.11
n7	20	15	2510	CP	16QAM	Outer_Full	19.33	17.23	18.13
n7	20	15	2510	CP	64QAM	Inner_Full	19.31	17.21	18.11
n7	20	15	2510	CP	64QAM	Edge_1RB_Left	18.91	16.81	17.71
n7	20	15	2510	CP	64QAM	Edge_1RB_Right	19.10	17.00	17.90
n7	20	15	2510	CP	64QAM	Outer_Full	18.35	16.25	17.15
n7	20	15	2510	CP	256QAM	Inner_Full	16.09	13.99	14.89
n7	20	15	2510	CP	256QAM	Edge_1RB_Left	15.97	13.87	14.77
n7	20	15	2510	CP	256QAM	Edge_1RB_Right	16.02	13.92	14.82
n7	20	15	2510	CP	256QAM	Outer_Full	16.27	14.17	15.07
n7	20	15	2535	DFT	QPSK	Inner_Full	22.95	20.85	21.75
n7	20	15	2535	DFT	QPSK	Edge_1RB_Left	20.64	18.54	19.44
n7	20	15	2535	DFT	QPSK	Edge_1RB_Right	20.65	18.55	19.45
n7	20	15	2535	DFT	QPSK	Outer_Full	22.08	19.98	20.88
n7	20	15	2535	DFT	16QAM	Inner_Full	21.82	19.72	20.62
n7	20	15	2535	DFT	16QAM	Edge_1RB_Left	21.04	18.94	19.84
n7	20	15	2535	DFT	16QAM	Edge_1RB_Right	21.11	19.01	19.91
n7	20	15	2535	DFT	16QAM	Outer_Full	20.84	18.74	19.64



BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n7	20	15	2535	DFT	64QAM	Inner_Full	20.42	18.32	19.22
n7	20	15	2535	DFT	64QAM	Edge_1RB_Left	20.17	18.07	18.97
n7	20	15	2535	DFT	64QAM	Edge_1RB_Right	20.20	18.10	19.00
n7	20	15	2535	DFT	64QAM	Outer_Full	20.42	18.32	19.22
n7	20	15	2535	DFT	256QAM	Inner_Full	17.75	15.65	16.55
n7	20	15	2535	DFT	256QAM	Edge_1RB_Left	17.54	15.44	16.34
n7	20	15	2535	DFT	256QAM	Edge_1RB_Right	17.54	15.44	16.34
n7	20	15	2535	DFT	256QAM	Outer_Full	17.90	15.80	16.70
n7	20	15	2535	CP	QPSK	Inner_Full	21.48	19.38	20.28
n7	20	15	2535	CP	QPSK	Edge_1RB_Left	19.91	17.81	18.71
n7	20	15	2535	CP	QPSK	Edge_1RB_Right	19.96	17.86	18.76
n7	20	15	2535	CP	QPSK	Outer_Full	19.52	17.42	18.32
n7	20	15	2535	CP	16QAM	Inner_Full	20.99	18.89	19.79
n7	20	15	2535	CP	16QAM	Edge_1RB_Left	20.22	18.12	19.02
n7	20	15	2535	CP	16QAM	Edge_1RB_Right	20.34	18.24	19.14
n7	20	15	2535	CP	16QAM	Outer_Full	19.46	17.36	18.26
n7	20	15	2535	CP	64QAM	Inner_Full	19.49	17.39	18.29
n7	20	15	2535	CP	64QAM	Edge_1RB_Left	19.14	17.04	17.94
n7	20	15	2535	CP	64QAM	Edge_1RB_Right	19.10	17.00	17.90
n7	20	15	2535	CP	64QAM	Outer_Full	18.47	16.37	17.27
n7	20	15	2535	CP	256QAM	Inner_Full	16.31	14.21	15.11
n7	20	15	2535	CP	256QAM	Edge_1RB_Left	15.98	13.88	14.78
n7	20	15	2535	CP	256QAM	Edge_1RB_Right	16.30	14.20	15.10
n7	20	15	2535	CP	256QAM	Outer_Full	16.41	14.31	15.21
n7	20	15	2560	DFT	QPSK	Inner_Full	22.98	20.88	21.78
n7	20	15	2560	DFT	QPSK	Edge_1RB_Left	20.72	18.62	19.52
n7	20	15	2560	DFT	QPSK	Edge_1RB_Right	20.48	18.38	19.28
n7	20	15	2560	DFT	QPSK	Outer_Full	22.04	19.94	20.84
n7	20	15	2560	DFT	16QAM	Inner_Full	21.78	19.68	20.58
n7	20	15	2560	DFT	16QAM	Edge_1RB_Left	20.99	18.89	19.79



BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n7	20	15	2560	DFT	16QAM	Edge_1RB_Right	20.92	18.82	19.72
n7	20	15	2560	DFT	16QAM	Outer_Full	20.89	18.79	19.69
n7	20	15	2560	DFT	64QAM	Inner_Full	20.38	18.28	19.18
n7	20	15	2560	DFT	64QAM	Edge_1RB_Left	20.21	18.11	19.01
n7	20	15	2560	DFT	64QAM	Edge_1RB_Right	20.00	17.90	18.80
n7	20	15	2560	DFT	64QAM	Outer_Full	20.36	18.26	19.16
n7	20	15	2560	DFT	256QAM	Inner_Full	17.77	15.67	16.57
n7	20	15	2560	DFT	256QAM	Edge_1RB_Left	17.57	15.47	16.37
n7	20	15	2560	DFT	256QAM	Edge_1RB_Right	17.36	15.26	16.16
n7	20	15	2560	DFT	256QAM	Outer_Full	17.73	15.63	16.53
n7	20	15	2560	CP	QPSK	Inner_Full	21.50	19.40	20.30
n7	20	15	2560	CP	QPSK	Edge_1RB_Left	19.91	17.81	18.71
n7	20	15	2560	CP	QPSK	Edge_1RB_Right	19.83	17.73	18.63
n7	20	15	2560	CP	QPSK	Outer_Full	19.38	17.28	18.18
n7	20	15	2560	CP	16QAM	Inner_Full	20.89	18.79	19.69
n7	20	15	2560	CP	16QAM	Edge_1RB_Left	20.17	18.07	18.97
n7	20	15	2560	CP	16QAM	Edge_1RB_Right	20.11	18.01	18.91
n7	20	15	2560	CP	16QAM	Outer_Full	19.35	17.25	18.15
n7	20	15	2560	CP	64QAM	Inner_Full	19.48	17.38	18.28
n7	20	15	2560	CP	64QAM	Edge_1RB_Left	19.10	17.00	17.90
n7	20	15	2560	CP	64QAM	Edge_1RB_Right	18.99	16.89	17.79
n7	20	15	2560	CP	64QAM	Outer_Full	18.38	16.28	17.18
n7	20	15	2560	CP	256QAM	Inner_Full	16.27	14.17	15.07
n7	20	15	2560	CP	256QAM	Edge_1RB_Left	16.05	13.95	14.85
n7	20	15	2560	CP	256QAM	Edge_1RB_Right	15.99	13.89	14.79
n7	20	15	2560	CP	256QAM	Outer_Full	16.35	14.25	15.15
n7	25	15	2512.5	DFT	QPSK	Inner_Full	23.05	20.95	21.85
n7	25	15	2512.5	DFT	QPSK	Edge_1RB_Left	20.61	18.51	19.41
n7	25	15	2512.5	DFT	QPSK	Edge_1RB_Right	20.70	18.60	19.50
n7	25	15	2512.5	DFT	QPSK	Outer_Full	21.94	19.84	20.74



BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n7	25	15	2512.5	DFT	16QAM	Inner_Full	21.89	19.79	20.69
n7	25	15	2512.5	DFT	16QAM	Edge_1RB_Left	21.03	18.93	19.83
n7	25	15	2512.5	DFT	16QAM	Edge_1RB_Right	21.13	19.03	19.93
n7	25	15	2512.5	DFT	16QAM	Outer_Full	20.86	18.76	19.66
n7	25	15	2512.5	DFT	64QAM	Inner_Full	20.40	18.30	19.20
n7	25	15	2512.5	DFT	64QAM	Edge_1RB_Left	20.05	17.95	18.85
n7	25	15	2512.5	DFT	64QAM	Edge_1RB_Right	20.24	18.14	19.04
n7	25	15	2512.5	DFT	64QAM	Outer_Full	20.38	18.28	19.18
n7	25	15	2512.5	DFT	256QAM	Inner_Full	17.79	15.69	16.59
n7	25	15	2512.5	DFT	256QAM	Edge_1RB_Left	17.51	15.41	16.31
n7	25	15	2512.5	DFT	256QAM	Edge_1RB_Right	17.57	15.47	16.37
n7	25	15	2512.5	DFT	256QAM	Outer_Full	17.78	15.68	16.58
n7	25	15	2512.5	CP	QPSK	Inner_Full	21.61	19.51	20.41
n7	25	15	2512.5	CP	QPSK	Edge_1RB_Left	19.80	17.70	18.60
n7	25	15	2512.5	CP	QPSK	Edge_1RB_Right	19.92	17.82	18.72
n7	25	15	2512.5	CP	QPSK	Outer_Full	19.51	17.41	18.31
n7	25	15	2512.5	CP	16QAM	Inner_Full	20.91	18.81	19.71
n7	25	15	2512.5	CP	16QAM	Edge_1RB_Left	20.26	18.16	19.06
n7	25	15	2512.5	CP	16QAM	Edge_1RB_Right	20.33	18.23	19.13
n7	25	15	2512.5	CP	16QAM	Outer_Full	19.36	17.26	18.16
n7	25	15	2512.5	CP	64QAM	Inner_Full	19.51	17.41	18.31
n7	25	15	2512.5	CP	64QAM	Edge_1RB_Left	19.09	16.99	17.89
n7	25	15	2512.5	CP	64QAM	Edge_1RB_Right	19.25	17.15	18.05
n7	25	15	2512.5	CP	64QAM	Outer_Full	18.38	16.28	17.18
n7	25	15	2512.5	CP	256QAM	Inner_Full	16.41	14.31	15.21
n7	25	15	2512.5	CP	256QAM	Edge_1RB_Left	16.15	14.05	14.95
n7	25	15	2512.5	CP	256QAM	Edge_1RB_Right	16.14	14.04	14.94
n7	25	15	2512.5	CP	256QAM	Outer_Full	16.32	14.22	15.12
n7	25	15	2535	DFT	QPSK	Inner_Full	23.14	21.04	21.94
n7	25	15	2535	DFT	QPSK	Edge_1RB_Left	20.74	18.64	19.54



BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n7	25	15	2535	DFT	QPSK	Edge_1RB_Right	20.81	18.71	19.61
n7	25	15	2535	DFT	QPSK	Outer_Full	21.97	19.87	20.77
n7	25	15	2535	DFT	16QAM	Inner_Full	22.00	19.90	20.80
n7	25	15	2535	DFT	16QAM	Edge_1RB_Left	21.15	19.05	19.95
n7	25	15	2535	DFT	16QAM	Edge_1RB_Right	21.15	19.05	19.95
n7	25	15	2535	DFT	16QAM	Outer_Full	20.91	18.81	19.71
n7	25	15	2535	DFT	64QAM	Inner_Full	20.44	18.34	19.24
n7	25	15	2535	DFT	64QAM	Edge_1RB_Left	20.20	18.10	19.00
n7	25	15	2535	DFT	64QAM	Edge_1RB_Right	20.23	18.13	19.03
n7	25	15	2535	DFT	64QAM	Outer_Full	20.38	18.28	19.18
n7	25	15	2535	DFT	256QAM	Inner_Full	17.92	15.82	16.72
n7	25	15	2535	DFT	256QAM	Edge_1RB_Left	17.63	15.53	16.43
n7	25	15	2535	DFT	256QAM	Edge_1RB_Right	17.62	15.52	16.42
n7	25	15	2535	DFT	256QAM	Outer_Full	17.95	15.85	16.75
n7	25	15	2535	CP	QPSK	Inner_Full	21.78	19.68	20.58
n7	25	15	2535	CP	QPSK	Edge_1RB_Left	19.94	17.84	18.74
n7	25	15	2535	CP	QPSK	Edge_1RB_Right	20.08	17.98	18.88
n7	25	15	2535	CP	QPSK	Outer_Full	19.61	17.51	18.41
n7	25	15	2535	CP	16QAM	Inner_Full	21.03	18.93	19.83
n7	25	15	2535	CP	16QAM	Edge_1RB_Left	20.34	18.24	19.14
n7	25	15	2535	CP	16QAM	Edge_1RB_Right	20.37	18.27	19.17
n7	25	15	2535	CP	16QAM	Outer_Full	19.48	17.38	18.28
n7	25	15	2535	CP	64QAM	Inner_Full	19.66	17.56	18.46
n7	25	15	2535	CP	64QAM	Edge_1RB_Left	19.22	17.12	18.02
n7	25	15	2535	CP	64QAM	Edge_1RB_Right	19.16	17.06	17.96
n7	25	15	2535	CP	64QAM	Outer_Full	18.46	16.36	17.26
n7	25	15	2535	CP	256QAM	Inner_Full	16.38	14.28	15.18
n7	25	15	2535	CP	256QAM	Edge_1RB_Left	16.21	14.11	15.01
n7	25	15	2535	CP	256QAM	Edge_1RB_Right	16.31	14.21	15.11
n7	25	15	2535	CP	256QAM	Outer_Full	16.46	14.36	15.26



BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n7	25	15	2557.5	DFT	QPSK	Inner_Full	23.07	20.97	21.87
n7	25	15	2557.5	DFT	QPSK	Edge_1RB_Left	20.80	18.70	19.60
n7	25	15	2557.5	DFT	QPSK	Edge_1RB_Right	20.60	18.50	19.40
n7	25	15	2557.5	DFT	QPSK	Outer_Full	22.07	19.97	20.87
n7	25	15	2557.5	DFT	16QAM	Inner_Full	21.93	19.83	20.73
n7	25	15	2557.5	DFT	16QAM	Edge_1RB_Left	21.18	19.08	19.98
n7	25	15	2557.5	DFT	16QAM	Edge_1RB_Right	21.04	18.94	19.84
n7	25	15	2557.5	DFT	16QAM	Outer_Full	20.91	18.81	19.71
n7	25	15	2557.5	DFT	64QAM	Inner_Full	20.48	18.38	19.28
n7	25	15	2557.5	DFT	64QAM	Edge_1RB_Left	20.28	18.18	19.08
n7	25	15	2557.5	DFT	64QAM	Edge_1RB_Right	20.13	18.03	18.93
n7	25	15	2557.5	DFT	64QAM	Outer_Full	20.44	18.34	19.24
n7	25	15	2557.5	DFT	256QAM	Inner_Full	17.85	15.75	16.65
n7	25	15	2557.5	DFT	256QAM	Edge_1RB_Left	17.67	15.57	16.47
n7	25	15	2557.5	DFT	256QAM	Edge_1RB_Right	17.52	15.42	16.32
n7	25	15	2557.5	DFT	256QAM	Outer_Full	17.85	15.75	16.65
n7	25	15	2557.5	CP	QPSK	Inner_Full	21.69	19.59	20.49
n7	25	15	2557.5	CP	QPSK	Edge_1RB_Left	20.06	17.96	18.86
n7	25	15	2557.5	CP	QPSK	Edge_1RB_Right	19.85	17.75	18.65
n7	25	15	2557.5	CP	QPSK	Outer_Full	19.54	17.44	18.34
n7	25	15	2557.5	CP	16QAM	Inner_Full	21.00	18.90	19.80
n7	25	15	2557.5	CP	16QAM	Edge_1RB_Left	20.36	18.26	19.16
n7	25	15	2557.5	CP	16QAM	Edge_1RB_Right	20.13	18.03	18.93
n7	25	15	2557.5	CP	16QAM	Outer_Full	19.43	17.33	18.23
n7	25	15	2557.5	CP	64QAM	Inner_Full	19.54	17.44	18.34
n7	25	15	2557.5	CP	64QAM	Edge_1RB_Left	19.24	17.14	18.04
n7	25	15	2557.5	CP	64QAM	Edge_1RB_Right	19.08	16.98	17.88
n7	25	15	2557.5	CP	64QAM	Outer_Full	18.47	16.37	17.27
n7	25	15	2557.5	CP	256QAM	Inner_Full	16.40	14.30	15.20
n7	25	15	2557.5	CP	256QAM	Edge_1RB_Left	16.21	14.11	15.01



BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n7	25	15	2557.5	CP	256QAM	Edge_1RB_Right	16.00	13.90	14.80
n7	25	15	2557.5	CP	256QAM	Outer_Full	16.43	14.33	15.23
n7	30	15	2515	DFT	QPSK	Inner_Full	23.03	20.93	21.83
n7	30	15	2515	DFT	QPSK	Edge_1RB_Left	20.58	18.48	19.38
n7	30	15	2515	DFT	QPSK	Edge_1RB_Right	20.64	18.54	19.44
n7	30	15	2515	DFT	QPSK	Outer_Full	21.94	19.84	20.74
n7	30	15	2515	DFT	16QAM	Inner_Full	21.85	19.75	20.65
n7	30	15	2515	DFT	16QAM	Edge_1RB_Left	20.92	18.82	19.72
n7	30	15	2515	DFT	16QAM	Edge_1RB_Right	21.07	18.97	19.87
n7	30	15	2515	DFT	16QAM	Outer_Full	20.87	18.77	19.67
n7	30	15	2515	DFT	64QAM	Inner_Full	20.39	18.29	19.19
n7	30	15	2515	DFT	64QAM	Edge_1RB_Left	20.16	18.06	18.96
n7	30	15	2515	DFT	64QAM	Edge_1RB_Right	20.20	18.10	19.00
n7	30	15	2515	DFT	64QAM	Outer_Full	20.34	18.24	19.14
n7	30	15	2515	DFT	256QAM	Inner_Full	17.79	15.69	16.59
n7	30	15	2515	DFT	256QAM	Edge_1RB_Left	17.52	15.42	16.32
n7	30	15	2515	DFT	256QAM	Edge_1RB_Right	17.51	15.41	16.31
n7	30	15	2515	DFT	256QAM	Outer_Full	17.85	15.75	16.65
n7	30	15	2515	CP	QPSK	Inner_Full	21.46	19.36	20.26
n7	30	15	2515	CP	QPSK	Edge_1RB_Left	19.81	17.71	18.61
n7	30	15	2515	CP	QPSK	Edge_1RB_Right	19.93	17.83	18.73
n7	30	15	2515	CP	QPSK	Outer_Full	19.37	17.27	18.17
n7	30	15	2515	CP	16QAM	Inner_Full	20.98	18.88	19.78
n7	30	15	2515	CP	16QAM	Edge_1RB_Left	20.07	17.97	18.87
n7	30	15	2515	CP	16QAM	Edge_1RB_Right	20.31	18.21	19.11
n7	30	15	2515	CP	16QAM	Outer_Full	19.37	17.27	18.17
n7	30	15	2515	CP	64QAM	Inner_Full	19.46	17.36	18.26
n7	30	15	2515	CP	64QAM	Edge_1RB_Left	18.92	16.82	17.72
n7	30	15	2515	CP	64QAM	Edge_1RB_Right	19.25	17.15	18.05
n7	30	15	2515	CP	64QAM	Outer_Full	18.35	16.25	17.15



BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n7	30	15	2515	CP	256QAM	Inner_Full	16.31	14.21	15.11
n7	30	15	2515	CP	256QAM	Edge_1RB_Left	16.15	14.05	14.95
n7	30	15	2515	CP	256QAM	Edge_1RB_Right	16.11	14.01	14.91
n7	30	15	2515	CP	256QAM	Outer_Full	16.42	14.32	15.22
n7	30	15	2535	DFT	QPSK	Inner_Full	23.16	21.06	21.96
n7	30	15	2535	DFT	QPSK	Edge_1RB_Left	20.75	18.65	19.55
n7	30	15	2535	DFT	QPSK	Edge_1RB_Right	20.66	18.56	19.46
n7	30	15	2535	DFT	QPSK	Outer_Full	22.06	19.96	20.86
n7	30	15	2535	DFT	16QAM	Inner_Full	21.87	19.77	20.67
n7	30	15	2535	DFT	16QAM	Edge_1RB_Left	21.04	18.94	19.84
n7	30	15	2535	DFT	16QAM	Edge_1RB_Right	21.16	19.06	19.96
n7	30	15	2535	DFT	16QAM	Outer_Full	20.93	18.83	19.73
n7	30	15	2535	DFT	64QAM	Inner_Full	20.44	18.34	19.24
n7	30	15	2535	DFT	64QAM	Edge_1RB_Left	20.14	18.04	18.94
n7	30	15	2535	DFT	64QAM	Edge_1RB_Right	20.16	18.06	18.96
n7	30	15	2535	DFT	64QAM	Outer_Full	20.40	18.30	19.20
n7	30	15	2535	DFT	256QAM	Inner_Full	17.85	15.75	16.65
n7	30	15	2535	DFT	256QAM	Edge_1RB_Left	17.66	15.56	16.46
n7	30	15	2535	DFT	256QAM	Edge_1RB_Right	17.53	15.43	16.33
n7	30	15	2535	DFT	256QAM	Outer_Full	17.95	15.85	16.75
n7	30	15	2535	CP	QPSK	Inner_Full	21.56	19.46	20.36
n7	30	15	2535	CP	QPSK	Edge_1RB_Left	19.91	17.81	18.71
n7	30	15	2535	CP	QPSK	Edge_1RB_Right	20.01	17.91	18.81
n7	30	15	2535	CP	QPSK	Outer_Full	19.42	17.32	18.22
n7	30	15	2535	CP	16QAM	Inner_Full	21.08	18.98	19.88
n7	30	15	2535	CP	16QAM	Edge_1RB_Left	20.19	18.09	18.99
n7	30	15	2535	CP	16QAM	Edge_1RB_Right	20.35	18.25	19.15
n7	30	15	2535	CP	16QAM	Outer_Full	19.44	17.34	18.24
n7	30	15	2535	CP	64QAM	Inner_Full	19.50	17.40	18.30
n7	30	15	2535	CP	64QAM	Edge_1RB_Left	19.08	16.98	17.88



BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n7	30	15	2535	CP	64QAM	Edge_1RB_Right	19.21	17.11	18.01
n7	30	15	2535	CP	64QAM	Outer_Full	18.46	16.36	17.26
n7	30	15	2535	CP	256QAM	Inner_Full	16.41	14.31	15.21
n7	30	15	2535	CP	256QAM	Edge_1RB_Left	16.19	14.09	14.99
n7	30	15	2535	CP	256QAM	Edge_1RB_Right	16.27	14.17	15.07
n7	30	15	2535	CP	256QAM	Outer_Full	16.44	14.34	15.24
n7	30	15	2555	DFT	QPSK	Inner_Full	23.12	21.02	21.92
n7	30	15	2555	DFT	QPSK	Edge_1RB_Left	20.74	18.64	19.54
n7	30	15	2555	DFT	QPSK	Edge_1RB_Right	20.47	18.37	19.27
n7	30	15	2555	DFT	QPSK	Outer_Full	22.00	19.90	20.80
n7	30	15	2555	DFT	16QAM	Inner_Full	21.94	19.84	20.74
n7	30	15	2555	DFT	16QAM	Edge_1RB_Left	21.21	19.11	20.01
n7	30	15	2555	DFT	16QAM	Edge_1RB_Right	21.03	18.93	19.83
n7	30	15	2555	DFT	16QAM	Outer_Full	20.92	18.82	19.72
n7	30	15	2555	DFT	64QAM	Inner_Full	20.44	18.34	19.24
n7	30	15	2555	DFT	64QAM	Edge_1RB_Left	20.23	18.13	19.03
n7	30	15	2555	DFT	64QAM	Edge_1RB_Right	20.05	17.95	18.85
n7	30	15	2555	DFT	64QAM	Outer_Full	20.48	18.38	19.28
n7	30	15	2555	DFT	256QAM	Inner_Full	17.78	15.68	16.58
n7	30	15	2555	DFT	256QAM	Edge_1RB_Left	17.77	15.67	16.57
n7	30	15	2555	DFT	256QAM	Edge_1RB_Right	17.41	15.31	16.21
n7	30	15	2555	DFT	256QAM	Outer_Full	17.92	15.82	16.72
n7	30	15	2555	CP	QPSK	Inner_Full	21.59	19.49	20.39
n7	30	15	2555	CP	QPSK	Edge_1RB_Left	20.02	17.92	18.82
n7	30	15	2555	CP	QPSK	Edge_1RB_Right	19.82	17.72	18.62
n7	30	15	2555	CP	QPSK	Outer_Full	19.43	17.33	18.23
n7	30	15	2555	CP	16QAM	Inner_Full	21.06	18.96	19.86
n7	30	15	2555	CP	16QAM	Edge_1RB_Left	20.34	18.24	19.14
n7	30	15	2555	CP	16QAM	Edge_1RB_Right	20.22	18.12	19.02
n7	30	15	2555	CP	16QAM	Outer_Full	19.43	17.33	18.23



BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n7	30	15	2555	CP	64QAM	Inner_Full	19.54	17.44	18.34
n7	30	15	2555	CP	64QAM	Edge_1RB_Left	19.25	17.15	18.05
n7	30	15	2555	CP	64QAM	Edge_1RB_Right	19.12	17.02	17.92
n7	30	15	2555	CP	64QAM	Outer_Full	18.46	16.36	17.26
n7	30	15	2555	CP	256QAM	Inner_Full	16.41	14.31	15.21
n7	30	15	2555	CP	256QAM	Edge_1RB_Left	16.18	14.08	14.98
n7	30	15	2555	CP	256QAM	Edge_1RB_Right	16.01	13.91	14.81
n7	30	15	2555	CP	256QAM	Outer_Full	16.47	14.37	15.27
n7	35	15	2517.5	DFT	QPSK	Inner_Full	22.01	19.91	20.81
n7	35	15	2517.5	DFT	QPSK	Edge_1RB_Left	21.95	19.85	20.75
n7	35	15	2517.5	DFT	QPSK	Edge_1RB_Right	21.96	19.86	20.76
n7	35	15	2517.5	DFT	QPSK	Outer_Full	22.03	19.93	20.83
n7	35	15	2517.5	DFT	16QAM	Inner_Full	20.87	18.77	19.67
n7	35	15	2517.5	DFT	16QAM	Edge_1RB_Left	20.76	18.66	19.56
n7	35	15	2517.5	DFT	16QAM	Edge_1RB_Right	20.80	18.70	19.60
n7	35	15	2517.5	DFT	16QAM	Outer_Full	20.80	18.70	19.60
n7	35	15	2517.5	DFT	64QAM	Inner_Full	20.26	18.16	19.06
n7	35	15	2517.5	DFT	64QAM	Edge_1RB_Left	20.26	18.16	19.06
n7	35	15	2517.5	DFT	64QAM	Edge_1RB_Right	20.30	18.20	19.10
n7	35	15	2517.5	DFT	64QAM	Outer_Full	20.27	18.17	19.07
n7	35	15	2517.5	DFT	256QAM	Inner_Full	17.89	15.79	16.69
n7	35	15	2517.5	DFT	256QAM	Edge_1RB_Left	17.84	15.74	16.64
n7	35	15	2517.5	DFT	256QAM	Edge_1RB_Right	17.86	15.76	16.66
n7	35	15	2517.5	DFT	256QAM	Outer_Full	17.89	15.79	16.69
n7	35	15	2517.5	CP	QPSK	Inner_Full	19.44	17.34	18.24
n7	35	15	2517.5	CP	QPSK	Edge_1RB_Left	19.38	17.28	18.18
n7	35	15	2517.5	CP	QPSK	Edge_1RB_Right	19.36	17.26	18.16
n7	35	15	2517.5	CP	QPSK	Outer_Full	19.41	17.31	18.21
n7	35	15	2517.5	CP	16QAM	Inner_Full	19.42	17.32	18.22
n7	35	15	2517.5	CP	16QAM	Edge_1RB_Left	19.41	17.31	18.21



BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n7	35	15	2517.5	CP	16QAM	Edge_1RB_Right	19.41	17.31	18.21
n7	35	15	2517.5	CP	16QAM	Outer_Full	19.41	17.31	18.21
n7	35	15	2517.5	CP	64QAM	Inner_Full	18.44	16.34	17.24
n7	35	15	2517.5	CP	64QAM	Edge_1RB_Left	18.48	16.38	17.28
n7	35	15	2517.5	CP	64QAM	Edge_1RB_Right	18.48	16.38	17.28
n7	35	15	2517.5	CP	64QAM	Outer_Full	18.44	16.34	17.24
n7	35	15	2517.5	CP	256QAM	Inner_Full	16.39	14.29	15.19
n7	35	15	2517.5	CP	256QAM	Edge_1RB_Left	16.38	14.28	15.18
n7	35	15	2517.5	CP	256QAM	Edge_1RB_Right	16.43	14.33	15.23
n7	35	15	2517.5	CP	256QAM	Outer_Full	16.40	14.30	15.20
n7	35	15	2535	DFT	QPSK	Inner_Full	22.06	19.96	20.86
n7	35	15	2535	DFT	QPSK	Edge_1RB_Left	22.09	19.99	20.89
n7	35	15	2535	DFT	QPSK	Edge_1RB_Right	22.06	19.96	20.86
n7	35	15	2535	DFT	QPSK	Outer_Full	22.04	19.94	20.84
n7	35	15	2535	DFT	16QAM	Inner_Full	20.96	18.86	19.76
n7	35	15	2535	DFT	16QAM	Edge_1RB_Left	20.96	18.86	19.76
n7	35	15	2535	DFT	16QAM	Edge_1RB_Right	20.92	18.82	19.72
n7	35	15	2535	DFT	16QAM	Outer_Full	20.93	18.83	19.73
n7	35	15	2535	DFT	64QAM	Inner_Full	20.47	18.37	19.27
n7	35	15	2535	DFT	64QAM	Edge_1RB_Left	20.48	18.38	19.28
n7	35	15	2535	DFT	64QAM	Edge_1RB_Right	20.48	18.38	19.28
n7	35	15	2535	DFT	64QAM	Outer_Full	20.46	18.36	19.26
n7	35	15	2535	DFT	256QAM	Inner_Full	17.97	15.87	16.77
n7	35	15	2535	DFT	256QAM	Edge_1RB_Left	17.90	15.80	16.70
n7	35	15	2535	DFT	256QAM	Edge_1RB_Right	17.86	15.76	16.66
n7	35	15	2535	DFT	256QAM	Outer_Full	17.94	15.84	16.74
n7	35	15	2535	CP	QPSK	Inner_Full	19.50	17.40	18.30
n7	35	15	2535	CP	QPSK	Edge_1RB_Left	19.55	17.45	18.35
n7	35	15	2535	CP	QPSK	Edge_1RB_Right	19.47	17.37	18.27
n7	35	15	2535	CP	QPSK	Outer_Full	19.43	17.33	18.23



BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n7	35	15	2535	CP	16QAM	Inner_Full	19.48	17.38	18.28
n7	35	15	2535	CP	16QAM	Edge_1RB_Left	19.46	17.36	18.26
n7	35	15	2535	CP	16QAM	Edge_1RB_Right	19.47	17.37	18.27
n7	35	15	2535	CP	16QAM	Outer_Full	19.47	17.37	18.27
n7	35	15	2535	CP	64QAM	Inner_Full	18.43	16.33	17.23
n7	35	15	2535	CP	64QAM	Edge_1RB_Left	18.45	16.35	17.25
n7	35	15	2535	CP	64QAM	Edge_1RB_Right	18.49	16.39	17.29
n7	35	15	2535	CP	64QAM	Outer_Full	18.47	16.37	17.27
n7	35	15	2535	CP	256QAM	Inner_Full	16.45	14.35	15.25
n7	35	15	2535	CP	256QAM	Edge_1RB_Left	16.42	14.32	15.22
n7	35	15	2535	CP	256QAM	Edge_1RB_Right	16.43	14.33	15.23
n7	35	15	2535	CP	256QAM	Outer_Full	16.42	14.32	15.22
n7	35	15	2552.5	DFT	QPSK	Inner_Full	22.05	19.95	20.85
n7	35	15	2552.5	DFT	QPSK	Edge_1RB_Left	21.99	19.89	20.79
n7	35	15	2552.5	DFT	QPSK	Edge_1RB_Right	22.05	19.95	20.85
n7	35	15	2552.5	DFT	QPSK	Outer_Full	22.05	19.95	20.85
n7	35	15	2552.5	DFT	16QAM	Inner_Full	20.98	18.88	19.78
n7	35	15	2552.5	DFT	16QAM	Edge_1RB_Left	20.96	18.86	19.76
n7	35	15	2552.5	DFT	16QAM	Edge_1RB_Right	20.97	18.87	19.77
n7	35	15	2552.5	DFT	16QAM	Outer_Full	20.96	18.86	19.76
n7	35	15	2552.5	DFT	64QAM	Inner_Full	20.40	18.30	19.20
n7	35	15	2552.5	DFT	64QAM	Edge_1RB_Left	20.41	18.31	19.21
n7	35	15	2552.5	DFT	64QAM	Edge_1RB_Right	20.42	18.32	19.22
n7	35	15	2552.5	DFT	64QAM	Outer_Full	20.34	18.24	19.14
n7	35	15	2552.5	DFT	256QAM	Inner_Full	17.97	15.87	16.77
n7	35	15	2552.5	DFT	256QAM	Edge_1RB_Left	17.90	15.80	16.70
n7	35	15	2552.5	DFT	256QAM	Edge_1RB_Right	17.95	15.85	16.75
n7	35	15	2552.5	DFT	256QAM	Outer_Full	17.98	15.88	16.78
n7	35	15	2552.5	CP	QPSK	Inner_Full	19.49	17.39	18.29
n7	35	15	2552.5	CP	QPSK	Edge_1RB_Left	19.43	17.33	18.23



BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n7	35	15	2552.5	CP	QPSK	Edge_1RB_Right	19.50	17.40	18.30
n7	35	15	2552.5	CP	QPSK	Outer_Full	19.44	17.34	18.24
n7	35	15	2552.5	CP	16QAM	Inner_Full	19.53	17.43	18.33
n7	35	15	2552.5	CP	16QAM	Edge_1RB_Left	19.47	17.37	18.27
n7	35	15	2552.5	CP	16QAM	Edge_1RB_Right	19.47	17.37	18.27
n7	35	15	2552.5	CP	16QAM	Outer_Full	19.50	17.40	18.30
n7	35	15	2552.5	CP	64QAM	Inner_Full	18.52	16.42	17.32
n7	35	15	2552.5	CP	64QAM	Edge_1RB_Left	18.53	16.43	17.33
n7	35	15	2552.5	CP	64QAM	Edge_1RB_Right	18.50	16.40	17.30
n7	35	15	2552.5	CP	64QAM	Outer_Full	18.53	16.43	17.33
n7	35	15	2552.5	CP	256QAM	Inner_Full	16.49	14.39	15.29
n7	35	15	2552.5	CP	256QAM	Edge_1RB_Left	16.45	14.35	15.25
n7	35	15	2552.5	CP	256QAM	Edge_1RB_Right	16.48	14.38	15.28
n7	35	15	2552.5	CP	256QAM	Outer_Full	16.49	14.39	15.29
n7	40	15	2520	DFT	QPSK	Inner_Full	23.05	20.95	21.85
n7	40	15	2520	DFT	QPSK	Edge_1RB_Left	20.53	18.43	19.33
n7	40	15	2520	DFT	QPSK	Edge_1RB_Right	20.77	18.67	19.57
n7	40	15	2520	DFT	QPSK	Outer_Full	22.03	19.93	20.83
n7	40	15	2520	DFT	16QAM	Inner_Full	21.88	19.78	20.68
n7	40	15	2520	DFT	16QAM	Edge_1RB_Left	20.92	18.82	19.72
n7	40	15	2520	DFT	16QAM	Edge_1RB_Right	21.07	18.97	19.87
n7	40	15	2520	DFT	16QAM	Outer_Full	20.89	18.79	19.69
n7	40	15	2520	DFT	64QAM	Inner_Full	20.37	18.27	19.17
n7	40	15	2520	DFT	64QAM	Edge_1RB_Left	19.96	17.86	18.76
n7	40	15	2520	DFT	64QAM	Edge_1RB_Right	20.20	18.10	19.00
n7	40	15	2520	DFT	64QAM	Outer_Full	20.35	18.25	19.15
n7	40	15	2520	DFT	256QAM	Inner_Full	17.87	15.77	16.67
n7	40	15	2520	DFT	256QAM	Edge_1RB_Left	17.54	15.44	16.34
n7	40	15	2520	DFT	256QAM	Edge_1RB_Right	17.60	15.50	16.40
n7	40	15	2520	DFT	256QAM	Outer_Full	17.95	15.85	16.75



BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n7	40	15	2520	CP	QPSK	Inner_Full	21.50	19.40	20.30
n7	40	15	2520	CP	QPSK	Edge_1RB_Left	19.81	17.71	18.61
n7	40	15	2520	CP	QPSK	Edge_1RB_Right	19.96	17.86	18.76
n7	40	15	2520	CP	QPSK	Outer_Full	19.48	17.38	18.28
n7	40	15	2520	CP	16QAM	Inner_Full	21.02	18.92	19.82
n7	40	15	2520	CP	16QAM	Edge_1RB_Left	20.09	17.99	18.89
n7	40	15	2520	CP	16QAM	Edge_1RB_Right	20.32	18.22	19.12
n7	40	15	2520	CP	16QAM	Outer_Full	19.39	17.29	18.19
n7	40	15	2520	CP	64QAM	Inner_Full	19.43	17.33	18.23
n7	40	15	2520	CP	64QAM	Edge_1RB_Left	18.92	16.82	17.72
n7	40	15	2520	CP	64QAM	Edge_1RB_Right	19.16	17.06	17.96
n7	40	15	2520	CP	64QAM	Outer_Full	18.37	16.27	17.17
n7	40	15	2520	CP	256QAM	Inner_Full	16.34	14.24	15.14
n7	40	15	2520	CP	256QAM	Edge_1RB_Left	15.99	13.89	14.79
n7	40	15	2520	CP	256QAM	Edge_1RB_Right	16.16	14.06	14.96
n7	40	15	2520	CP	256QAM	Outer_Full	16.31	14.21	15.11
n7	40	15	2535	DFT	QPSK	Inner_Full	23.15	21.05	21.95
n7	40	15	2535	DFT	QPSK	Edge_1RB_Left	20.63	18.53	19.43
n7	40	15	2535	DFT	QPSK	Edge_1RB_Right	20.77	18.67	19.57
n7	40	15	2535	DFT	QPSK	Outer_Full	22.12	20.02	20.92
n7	40	15	2535	DFT	16QAM	Inner_Full	22.01	19.91	20.81
n7	40	15	2535	DFT	16QAM	Edge_1RB_Left	21.13	19.03	19.93
n7	40	15	2535	DFT	16QAM	Edge_1RB_Right	21.19	19.09	19.99
n7	40	15	2535	DFT	16QAM	Outer_Full	20.92	18.82	19.72
n7	40	15	2535	DFT	64QAM	Inner_Full	20.47	18.37	19.27
n7	40	15	2535	DFT	64QAM	Edge_1RB_Left	20.17	18.07	18.97
n7	40	15	2535	DFT	64QAM	Edge_1RB_Right	20.14	18.04	18.94
n7	40	15	2535	DFT	64QAM	Outer_Full	20.38	18.28	19.18
n7	40	15	2535	DFT	256QAM	Inner_Full	17.92	15.82	16.72
n7	40	15	2535	DFT	256QAM	Edge_1RB_Left	17.51	15.41	16.31



BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n7	40	15	2535	DFT	256QAM	Edge_1RB_Right	17.54	15.44	16.34
n7	40	15	2535	DFT	256QAM	Outer_Full	17.90	15.80	16.70
n7	40	15	2535	CP	QPSK	Inner_Full	21.55	19.45	20.35
n7	40	15	2535	CP	QPSK	Edge_1RB_Left	19.85	17.75	18.65
n7	40	15	2535	CP	QPSK	Edge_1RB_Right	19.94	17.84	18.74
n7	40	15	2535	CP	QPSK	Outer_Full	19.51	17.41	18.31
n7	40	15	2535	CP	16QAM	Inner_Full	21.06	18.96	19.86
n7	40	15	2535	CP	16QAM	Edge_1RB_Left	20.16	18.06	18.96
n7	40	15	2535	CP	16QAM	Edge_1RB_Right	20.35	18.25	19.15
n7	40	15	2535	CP	16QAM	Outer_Full	19.45	17.35	18.25
n7	40	15	2535	CP	64QAM	Inner_Full	19.52	17.42	18.32
n7	40	15	2535	CP	64QAM	Edge_1RB_Left	19.04	16.94	17.84
n7	40	15	2535	CP	64QAM	Edge_1RB_Right	19.14	17.04	17.94
n7	40	15	2535	CP	64QAM	Outer_Full	16.75	14.65	15.55
n7	40	15	2535	CP	256QAM	Inner_Full	16.35	14.25	15.15
n7	40	15	2535	CP	256QAM	Edge_1RB_Left	16.16	14.06	14.96
n7	40	15	2535	CP	256QAM	Edge_1RB_Right	16.16	14.06	14.96
n7	40	15	2535	CP	256QAM	Outer_Full	16.36	14.26	15.16
n7	40	15	2550	DFT	QPSK	Inner_Full	23.12	21.02	21.92
n7	40	15	2550	DFT	QPSK	Edge_1RB_Left	20.79	18.69	19.59
n7	40	15	2550	DFT	QPSK	Edge_1RB_Right	20.52	18.42	19.32
n7	40	15	2550	DFT	QPSK	Outer_Full	22.19	20.09	20.99
n7	40	15	2550	DFT	16QAM	Inner_Full	22.01	19.91	20.81
n7	40	15	2550	DFT	16QAM	Edge_1RB_Left	21.16	19.06	19.96
n7	40	15	2550	DFT	16QAM	Edge_1RB_Right	20.99	18.89	19.79
n7	40	15	2550	DFT	16QAM	Outer_Full	20.93	18.83	19.73
n7	40	15	2550	DFT	64QAM	Inner_Full	20.46	18.36	19.26
n7	40	15	2550	DFT	64QAM	Edge_1RB_Left	20.27	18.17	19.07
n7	40	15	2550	DFT	64QAM	Edge_1RB_Right	20.08	17.98	18.88
n7	40	15	2550	DFT	64QAM	Outer_Full	20.42	18.32	19.22



BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n7	40	15	2550	DFT	256QAM	Inner_Full	17.93	15.83	16.73
n7	40	15	2550	DFT	256QAM	Edge_1RB_Left	17.70	15.60	16.50
n7	40	15	2550	DFT	256QAM	Edge_1RB_Right	17.37	15.27	16.17
n7	40	15	2550	DFT	256QAM	Outer_Full	17.90	15.80	16.70
n7	40	15	2550	CP	QPSK	Inner_Full	21.66	19.56	20.46
n7	40	15	2550	CP	QPSK	Edge_1RB_Left	20.05	17.95	18.85
n7	40	15	2550	CP	QPSK	Edge_1RB_Right	19.87	17.77	18.67
n7	40	15	2550	CP	QPSK	Outer_Full	19.53	17.43	18.33
n7	40	15	2550	CP	16QAM	Inner_Full	21.14	19.04	19.94
n7	40	15	2550	CP	16QAM	Edge_1RB_Left	20.49	18.39	19.29
n7	40	15	2550	CP	16QAM	Edge_1RB_Right	20.20	18.10	19.00
n7	40	15	2550	CP	16QAM	Outer_Full	19.49	17.39	18.29
n7	40	15	2550	CP	64QAM	Inner_Full	19.57	17.47	18.37
n7	40	15	2550	CP	64QAM	Edge_1RB_Left	19.30	17.20	18.10
n7	40	15	2550	CP	64QAM	Edge_1RB_Right	19.05	16.95	17.85
n7	40	15	2550	CP	64QAM	Outer_Full	18.50	16.40	17.30
n7	40	15	2550	CP	256QAM	Inner_Full	16.47	14.37	15.27
n7	40	15	2550	CP	256QAM	Edge_1RB_Left	16.18	14.08	14.98
n7	40	15	2550	CP	256QAM	Edge_1RB_Right	16.00	13.90	14.80
n7	40	15	2550	CP	256QAM	Outer_Full	16.38	14.28	15.18
n7	50	15	2525	DFT	QPSK	Inner_Full	23.24	21.14	22.04
n7	50	15	2525	DFT	QPSK	Edge_1RB_Left	20.73	18.63	19.53
n7	50	15	2525	DFT	QPSK	Edge_1RB_Right	20.82	18.72	19.62
n7	50	15	2525	DFT	QPSK	Outer_Full	22.10	20.00	20.90
n7	50	15	2525	DFT	16QAM	Inner_Full	22.03	19.93	20.83
n7	50	15	2525	DFT	16QAM	Edge_1RB_Left	21.14	19.04	19.94
n7	50	15	2525	DFT	16QAM	Edge_1RB_Right	21.34	19.24	20.14
n7	50	15	2525	DFT	16QAM	Outer_Full	21.02	18.92	19.82
n7	50	15	2525	DFT	64QAM	Inner_Full	20.48	18.38	19.28
n7	50	15	2525	DFT	64QAM	Edge_1RB_Left	20.33	18.23	19.13



BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n7	50	15	2525	DFT	64QAM	Edge_1RB_Right	20.25	18.15	19.05
n7	50	15	2525	DFT	64QAM	Outer_Full	20.52	18.42	19.32
n7	50	15	2525	DFT	256QAM	Inner_Full	17.98	15.88	16.78
n7	50	15	2525	DFT	256QAM	Edge_1RB_Left	17.66	15.56	16.46
n7	50	15	2525	DFT	256QAM	Edge_1RB_Right	17.74	15.64	16.54
n7	50	15	2525	DFT	256QAM	Outer_Full	18.00	15.90	16.80
n7	50	15	2525	CP	QPSK	Inner_Full	21.69	19.59	20.49
n7	50	15	2525	CP	QPSK	Edge_1RB_Left	20.02	17.92	18.82
n7	50	15	2525	CP	QPSK	Edge_1RB_Right	20.07	17.97	18.87
n7	50	15	2525	CP	QPSK	Outer_Full	19.52	17.42	18.32
n7	50	15	2525	CP	16QAM	Inner_Full	21.18	19.08	19.98
n7	50	15	2525	CP	16QAM	Edge_1RB_Left	20.27	18.17	19.07
n7	50	15	2525	CP	16QAM	Edge_1RB_Right	20.42	18.32	19.22
n7	50	15	2525	CP	16QAM	Outer_Full	19.58	17.48	18.38
n7	50	15	2525	CP	64QAM	Inner_Full	19.56	17.46	18.36
n7	50	15	2525	CP	64QAM	Edge_1RB_Left	19.08	16.98	17.88
n7	50	15	2525	CP	64QAM	Edge_1RB_Right	19.30	17.20	18.10
n7	50	15	2525	CP	64QAM	Outer_Full	18.53	16.43	17.33
n7	50	15	2525	CP	256QAM	Inner_Full	16.47	14.37	15.27
n7	50	15	2525	CP	256QAM	Edge_1RB_Left	16.16	14.06	14.96
n7	50	15	2525	CP	256QAM	Edge_1RB_Right	16.30	14.20	15.10
n7	50	15	2525	CP	256QAM	Outer_Full	16.56	14.46	15.36
n7	50	15	2535	DFT	QPSK	Inner_Full	23.28	21.18	22.08
n7	50	15	2535	DFT	QPSK	Edge_1RB_Left	20.62	18.52	19.42
n7	50	15	2535	DFT	QPSK	Edge_1RB_Right	20.84	18.74	19.64
n7	50	15	2535	DFT	QPSK	Outer_Full	22.23	20.13	21.03
n7	50	15	2535	DFT	16QAM	Inner_Full	22.10	20.00	20.90
n7	50	15	2535	DFT	16QAM	Edge_1RB_Left	21.17	19.07	19.97
n7	50	15	2535	DFT	16QAM	Edge_1RB_Right	21.21	19.11	20.01
n7	50	15	2535	DFT	16QAM	Outer_Full	21.03	18.93	19.83



BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n7	50	15	2535	DFT	64QAM	Inner_Full	20.62	18.52	19.42
n7	50	15	2535	DFT	64QAM	Edge_1RB_Left	20.29	18.19	19.09
n7	50	15	2535	DFT	64QAM	Edge_1RB_Right	20.36	18.26	19.16
n7	50	15	2535	DFT	64QAM	Outer_Full	20.57	18.47	19.37
n7	50	15	2535	DFT	256QAM	Inner_Full	18.07	15.97	16.87
n7	50	15	2535	DFT	256QAM	Edge_1RB_Left	17.64	15.54	16.44
n7	50	15	2535	DFT	256QAM	Edge_1RB_Right	17.58	15.48	16.38
n7	50	15	2535	DFT	256QAM	Outer_Full	18.12	16.02	16.92
n7	50	15	2535	CP	QPSK	Inner_Full	21.77	19.67	20.57
n7	50	15	2535	CP	QPSK	Edge_1RB_Left	19.94	17.84	18.74
n7	50	15	2535	CP	QPSK	Edge_1RB_Right	20.08	17.98	18.88
n7	50	15	2535	CP	QPSK	Outer_Full	19.58	17.48	18.38
n7	50	15	2535	CP	16QAM	Inner_Full	21.16	19.06	19.96
n7	50	15	2535	CP	16QAM	Edge_1RB_Left	20.36	18.26	19.16
n7	50	15	2535	CP	16QAM	Edge_1RB_Right	20.36	18.26	19.16
n7	50	15	2535	CP	16QAM	Outer_Full	19.54	17.44	18.34
n7	50	15	2535	CP	64QAM	Inner_Full	19.64	17.54	18.44
n7	50	15	2535	CP	64QAM	Edge_1RB_Left	19.10	17.00	17.90
n7	50	15	2535	CP	64QAM	Edge_1RB_Right	19.16	17.06	17.96
n7	50	15	2535	CP	64QAM	Outer_Full	18.52	16.42	17.32
n7	50	15	2535	CP	256QAM	Inner_Full	16.56	14.46	15.36
n7	50	15	2535	CP	256QAM	Edge_1RB_Left	16.26	14.16	15.06
n7	50	15	2535	CP	256QAM	Edge_1RB_Right	16.27	14.17	15.07
n7	50	15	2535	CP	256QAM	Outer_Full	16.63	14.53	15.43
n7	50	15	2545	DFT	QPSK	Inner_Full	23.30	21.20	22.10
n7	50	15	2545	DFT	QPSK	Edge_1RB_Left	20.85	18.75	19.65
n7	50	15	2545	DFT	QPSK	Edge_1RB_Right	20.77	18.67	19.57
n7	50	15	2545	DFT	QPSK	Outer_Full	22.24	20.14	21.04
n7	50	15	2545	DFT	16QAM	Inner_Full	22.09	19.99	20.89
n7	50	15	2545	DFT	16QAM	Edge_1RB_Left	21.28	19.18	20.08



BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n7	50	15	2545	DFT	16QAM	Edge_1RB_Right	21.22	19.12	20.02
n7	50	15	2545	DFT	16QAM	Outer_Full	21.02	18.92	19.82
n7	50	15	2545	DFT	64QAM	Inner_Full	20.61	18.51	19.41
n7	50	15	2545	DFT	64QAM	Edge_1RB_Left	20.27	18.17	19.07
n7	50	15	2545	DFT	64QAM	Edge_1RB_Right	20.21	18.11	19.01
n7	50	15	2545	DFT	64QAM	Outer_Full	20.56	18.46	19.36
n7	50	15	2545	DFT	256QAM	Inner_Full	18.09	15.99	16.89
n7	50	15	2545	DFT	256QAM	Edge_1RB_Left	17.87	15.77	16.67
n7	50	15	2545	DFT	256QAM	Edge_1RB_Right	17.59	15.49	16.39
n7	50	15	2545	DFT	256QAM	Outer_Full	18.09	15.99	16.89
n7	50	15	2545	CP	QPSK	Inner_Full	21.79	19.69	20.59
n7	50	15	2545	CP	QPSK	Edge_1RB_Left	20.02	17.92	18.82
n7	50	15	2545	CP	QPSK	Edge_1RB_Right	19.91	17.81	18.71
n7	50	15	2545	CP	QPSK	Outer_Full	19.61	17.51	18.41
n7	50	15	2545	CP	16QAM	Inner_Full	21.27	19.17	20.07
n7	50	15	2545	CP	16QAM	Edge_1RB_Left	20.40	18.30	19.20
n7	50	15	2545	CP	16QAM	Edge_1RB_Right	20.36	18.26	19.16
n7	50	15	2545	CP	16QAM	Outer_Full	19.64	17.54	18.44
n7	50	15	2545	CP	64QAM	Inner_Full	19.68	17.58	18.48
n7	50	15	2545	CP	64QAM	Edge_1RB_Left	19.30	17.20	18.10
n7	50	15	2545	CP	64QAM	Edge_1RB_Right	19.20	17.10	18.00
n7	50	15	2545	CP	64QAM	Outer_Full	18.70	16.60	17.50
n7	50	15	2545	CP	256QAM	Inner_Full	16.62	14.52	15.42
n7	50	15	2545	CP	256QAM	Edge_1RB_Left	16.26	14.16	15.06
n7	50	15	2545	CP	256QAM	Edge_1RB_Right	16.19	14.09	14.99
n7	50	15	2545	CP	256QAM	Outer_Full	16.67	14.57	15.47



n38

BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n38	10	30	2575	DFT	QPSK	Inner_Full	24.29	22.39	23.09
n38	10	30	2575	DFT	QPSK	Edge_1RB_Left	20.69	18.79	19.49
n38	10	30	2575	DFT	QPSK	Edge_1RB_Right	20.58	18.68	19.38
n38	10	30	2575	DFT	QPSK	Outer_Full	23.31	21.41	22.11
n38	10	30	2575	DFT	16QAM	Inner_Full	24.24	22.34	23.04
n38	10	30	2575	DFT	16QAM	Edge_1RB_Left	21.91	20.01	20.71
n38	10	30	2575	DFT	16QAM	Edge_1RB_Right	21.77	19.87	20.57
n38	10	30	2575	DFT	16QAM	Outer_Full	22.17	20.27	20.97
n38	10	30	2575	DFT	64QAM	Inner_Full	23.25	21.35	22.05
n38	10	30	2575	DFT	64QAM	Edge_1RB_Left	21.21	19.31	20.01
n38	10	30	2575	DFT	64QAM	Edge_1RB_Right	21.11	19.21	19.91
n38	10	30	2575	DFT	64QAM	Outer_Full	21.74	19.84	20.54
n38	10	30	2575	DFT	256QAM	Inner_Full	21.66	19.76	20.46
n38	10	30	2575	DFT	256QAM	Edge_1RB_Left	19.40	17.50	18.20
n38	10	30	2575	DFT	256QAM	Edge_1RB_Right	19.29	17.39	18.09
n38	10	30	2575	DFT	256QAM	Outer_Full	21.58	19.68	20.38
n38	10	30	2575	CP	QPSK	Inner_Full	24.08	22.18	22.88
n38	10	30	2575	CP	QPSK	Edge_1RB_Left	21.16	19.26	19.96
n38	10	30	2575	CP	QPSK	Edge_1RB_Right	21.08	19.18	19.88
n38	10	30	2575	CP	QPSK	Outer_Full	21.26	19.36	20.06
n38	10	30	2575	CP	16QAM	Inner_Full	23.79	21.89	22.59
n38	10	30	2575	CP	16QAM	Edge_1RB_Left	21.11	19.21	19.91
n38	10	30	2575	CP	16QAM	Edge_1RB_Right	21.11	19.21	19.91
n38	10	30	2575	CP	16QAM	Outer_Full	21.26	19.36	20.06
n38	10	30	2575	CP	64QAM	Inner_Full	23.28	21.38	22.08
n38	10	30	2575	CP	64QAM	Edge_1RB_Left	20.29	18.39	19.09
n38	10	30	2575	CP	64QAM	Edge_1RB_Right	20.26	18.36	19.06
n38	10	30	2575	CP	64QAM	Outer_Full	20.73	18.83	19.53



BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n38	10	30	2575	CP	256QAM	Inner_Full	20.70	18.80	19.50
n38	10	30	2575	CP	256QAM	Edge_1RB_Left	17.39	15.49	16.19
n38	10	30	2575	CP	256QAM	Edge_1RB_Right	17.29	15.39	16.09
n38	10	30	2575	CP	256QAM	Outer_Full	20.41	18.51	19.21
n38	10	30	2595	DFT	QPSK	Inner_Full	24.32	22.42	23.12
n38	10	30	2595	DFT	QPSK	Edge_1RB_Left	20.65	18.75	19.45
n38	10	30	2595	DFT	QPSK	Edge_1RB_Right	20.61	18.71	19.41
n38	10	30	2595	DFT	QPSK	Outer_Full	23.25	21.35	22.05
n38	10	30	2595	DFT	16QAM	Inner_Full	24.08	22.18	22.88
n38	10	30	2595	DFT	16QAM	Edge_1RB_Left	21.85	19.95	20.65
n38	10	30	2595	DFT	16QAM	Edge_1RB_Right	21.92	20.02	20.72
n38	10	30	2595	DFT	16QAM	Outer_Full	22.19	20.29	20.99
n38	10	30	2595	DFT	64QAM	Inner_Full	22.67	20.77	21.47
n38	10	30	2595	DFT	64QAM	Edge_1RB_Left	21.16	19.26	19.96
n38	10	30	2595	DFT	64QAM	Edge_1RB_Right	21.15	19.25	19.95
n38	10	30	2595	DFT	64QAM	Outer_Full	21.70	19.80	20.50
n38	10	30	2595	DFT	256QAM	Inner_Full	21.19	19.29	19.99
n38	10	30	2595	DFT	256QAM	Edge_1RB_Left	19.39	17.49	18.19
n38	10	30	2595	DFT	256QAM	Edge_1RB_Right	19.37	17.47	18.17
n38	10	30	2595	DFT	256QAM	Outer_Full	21.04	19.14	19.84
n38	10	30	2595	CP	QPSK	Inner_Full	23.66	21.76	22.46
n38	10	30	2595	CP	QPSK	Edge_1RB_Left	21.14	19.24	19.94
n38	10	30	2595	CP	QPSK	Edge_1RB_Right	21.30	19.40	20.10
n38	10	30	2595	CP	QPSK	Outer_Full	21.31	19.41	20.11
n38	10	30	2595	CP	16QAM	Inner_Full	23.23	21.33	22.03
n38	10	30	2595	CP	16QAM	Edge_1RB_Left	20.97	19.07	19.77
n38	10	30	2595	CP	16QAM	Edge_1RB_Right	20.98	19.08	19.78
n38	10	30	2595	CP	16QAM	Outer_Full	21.26	19.36	20.06
n38	10	30	2595	CP	64QAM	Inner_Full	22.76	20.86	21.56
n38	10	30	2595	CP	64QAM	Edge_1RB_Left	20.23	18.33	19.03



BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n38	10	30	2595	CP	64QAM	Edge_1RB_Right	20.31	18.41	19.11
n38	10	30	2595	CP	64QAM	Outer_Full	20.76	18.86	19.56
n38	10	30	2595	CP	256QAM	Inner_Full	20.11	18.21	18.91
n38	10	30	2595	CP	256QAM	Edge_1RB_Left	17.33	15.43	16.13
n38	10	30	2595	CP	256QAM	Edge_1RB_Right	17.45	15.55	16.25
n38	10	30	2595	CP	256QAM	Outer_Full	20.08	18.18	18.88
n38	10	30	2615	DFT	QPSK	Inner_Full	24.41	22.51	23.21
n38	10	30	2615	DFT	QPSK	Edge_1RB_Left	20.67	18.77	19.47
n38	10	30	2615	DFT	QPSK	Edge_1RB_Right	20.66	18.76	19.46
n38	10	30	2615	DFT	QPSK	Outer_Full	23.36	21.46	22.16
n38	10	30	2615	DFT	16QAM	Inner_Full	24.33	22.43	23.13
n38	10	30	2615	DFT	16QAM	Edge_1RB_Left	21.92	20.02	20.72
n38	10	30	2615	DFT	16QAM	Edge_1RB_Right	21.99	20.09	20.79
n38	10	30	2615	DFT	16QAM	Outer_Full	22.25	20.35	21.05
n38	10	30	2615	DFT	64QAM	Inner_Full	23.11	21.21	21.91
n38	10	30	2615	DFT	64QAM	Edge_1RB_Left	21.21	19.31	20.01
n38	10	30	2615	DFT	64QAM	Edge_1RB_Right	21.27	19.37	20.07
n38	10	30	2615	DFT	64QAM	Outer_Full	21.79	19.89	20.59
n38	10	30	2615	DFT	256QAM	Inner_Full	21.59	19.69	20.39
n38	10	30	2615	DFT	256QAM	Edge_1RB_Left	19.42	17.52	18.22
n38	10	30	2615	DFT	256QAM	Edge_1RB_Right	19.46	17.56	18.26
n38	10	30	2615	DFT	256QAM	Outer_Full	21.44	19.54	20.24
n38	10	30	2615	CP	QPSK	Inner_Full	24.02	22.12	22.82
n38	10	30	2615	CP	QPSK	Edge_1RB_Left	21.20	19.30	20.00
n38	10	30	2615	CP	QPSK	Edge_1RB_Right	21.27	19.37	20.07
n38	10	30	2615	CP	QPSK	Outer_Full	21.32	19.42	20.12
n38	10	30	2615	CP	16QAM	Inner_Full	23.61	21.71	22.41
n38	10	30	2615	CP	16QAM	Edge_1RB_Left	21.12	19.22	19.92
n38	10	30	2615	CP	16QAM	Edge_1RB_Right	21.10	19.20	19.90
n38	10	30	2615	CP	16QAM	Outer_Full	21.32	19.42	20.12



BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n38	10	30	2615	CP	64QAM	Inner_Full	23.11	21.21	21.91
n38	10	30	2615	CP	64QAM	Edge_1RB_Left	20.32	18.42	19.12
n38	10	30	2615	CP	64QAM	Edge_1RB_Right	20.35	18.45	19.15
n38	10	30	2615	CP	64QAM	Outer_Full	20.80	18.90	19.60
n38	10	30	2615	CP	256QAM	Inner_Full	20.56	18.66	19.36
n38	10	30	2615	CP	256QAM	Edge_1RB_Left	17.44	15.54	16.24
n38	10	30	2615	CP	256QAM	Edge_1RB_Right	17.41	15.51	16.21
n38	10	30	2615	CP	256QAM	Outer_Full	20.39	18.49	19.19
n38	15	30	2577.5	DFT	QPSK	Inner_Full	24.38	22.48	23.18
n38	15	30	2577.5	DFT	QPSK	Edge_1RB_Left	20.65	18.75	19.45
n38	15	30	2577.5	DFT	QPSK	Edge_1RB_Right	20.57	18.67	19.37
n38	15	30	2577.5	DFT	QPSK	Outer_Full	23.27	21.37	22.07
n38	15	30	2577.5	DFT	16QAM	Inner_Full	24.16	22.26	22.96
n38	15	30	2577.5	DFT	16QAM	Edge_1RB_Left	21.82	19.92	20.62
n38	15	30	2577.5	DFT	16QAM	Edge_1RB_Right	21.86	19.96	20.66
n38	15	30	2577.5	DFT	16QAM	Outer_Full	22.13	20.23	20.93
n38	15	30	2577.5	DFT	64QAM	Inner_Full	23.09	21.19	21.89
n38	15	30	2577.5	DFT	64QAM	Edge_1RB_Left	21.26	19.36	20.06
n38	15	30	2577.5	DFT	64QAM	Edge_1RB_Right	21.13	19.23	19.93
n38	15	30	2577.5	DFT	64QAM	Outer_Full	21.66	19.76	20.46
n38	15	30	2577.5	DFT	256QAM	Inner_Full	21.59	19.69	20.39
n38	15	30	2577.5	DFT	256QAM	Edge_1RB_Left	19.38	17.48	18.18
n38	15	30	2577.5	DFT	256QAM	Edge_1RB_Right	19.31	17.41	18.11
n38	15	30	2577.5	DFT	256QAM	Outer_Full	21.55	19.65	20.35
n38	15	30	2577.5	CP	QPSK	Inner_Full	24.06	22.16	22.86
n38	15	30	2577.5	CP	QPSK	Edge_1RB_Left	21.11	19.21	19.91
n38	15	30	2577.5	CP	QPSK	Edge_1RB_Right	21.09	19.19	19.89
n38	15	30	2577.5	CP	QPSK	Outer_Full	21.30	19.40	20.10
n38	15	30	2577.5	CP	16QAM	Inner_Full	23.63	21.73	22.43
n38	15	30	2577.5	CP	16QAM	Edge_1RB_Left	21.14	19.24	19.94



BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n38	15	30	2577.5	CP	16QAM	Edge_1RB_Right	21.07	19.17	19.87
n38	15	30	2577.5	CP	16QAM	Outer_Full	21.20	19.30	20.00
n38	15	30	2577.5	CP	64QAM	Inner_Full	23.30	21.40	22.10
n38	15	30	2577.5	CP	64QAM	Edge_1RB_Left	20.39	18.49	19.19
n38	15	30	2577.5	CP	64QAM	Edge_1RB_Right	20.37	18.47	19.17
n38	15	30	2577.5	CP	64QAM	Outer_Full	20.76	18.86	19.56
n38	15	30	2577.5	CP	256QAM	Inner_Full	20.62	18.72	19.42
n38	15	30	2577.5	CP	256QAM	Edge_1RB_Left	17.42	15.52	16.22
n38	15	30	2577.5	CP	256QAM	Edge_1RB_Right	17.36	15.46	16.16
n38	15	30	2577.5	CP	256QAM	Outer_Full	20.44	18.54	19.24
n38	15	30	2595	DFT	QPSK	Inner_Full	24.48	22.58	23.28
n38	15	30	2595	DFT	QPSK	Edge_1RB_Left	20.65	18.75	19.45
n38	15	30	2595	DFT	QPSK	Edge_1RB_Right	20.76	18.86	19.56
n38	15	30	2595	DFT	QPSK	Outer_Full	23.25	21.35	22.05
n38	15	30	2595	DFT	16QAM	Inner_Full	24.12	22.22	22.92
n38	15	30	2595	DFT	16QAM	Edge_1RB_Left	21.89	19.99	20.69
n38	15	30	2595	DFT	16QAM	Edge_1RB_Right	21.93	20.03	20.73
n38	15	30	2595	DFT	16QAM	Outer_Full	22.09	20.19	20.89
n38	15	30	2595	DFT	64QAM	Inner_Full	22.71	20.81	21.51
n38	15	30	2595	DFT	64QAM	Edge_1RB_Left	21.33	19.43	20.13
n38	15	30	2595	DFT	64QAM	Edge_1RB_Right	21.33	19.43	20.13
n38	15	30	2595	DFT	64QAM	Outer_Full	21.72	19.82	20.52
n38	15	30	2595	DFT	256QAM	Inner_Full	21.17	19.27	19.97
n38	15	30	2595	DFT	256QAM	Edge_1RB_Left	19.34	17.44	18.14
n38	15	30	2595	DFT	256QAM	Edge_1RB_Right	19.42	17.52	18.22
n38	15	30	2595	DFT	256QAM	Outer_Full	21.26	19.36	20.06
n38	15	30	2595	CP	QPSK	Inner_Full	23.54	21.64	22.34
n38	15	30	2595	CP	QPSK	Edge_1RB_Left	21.20	19.30	20.00
n38	15	30	2595	CP	QPSK	Edge_1RB_Right	21.24	19.34	20.04
n38	15	30	2595	CP	QPSK	Outer_Full	21.25	19.35	20.05



BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n38	15	30	2595	CP	16QAM	Inner_Full	23.22	21.32	22.02
n38	15	30	2595	CP	16QAM	Edge_1RB_Left	21.19	19.29	19.99
n38	15	30	2595	CP	16QAM	Edge_1RB_Right	21.15	19.25	19.95
n38	15	30	2595	CP	16QAM	Outer_Full	21.26	19.36	20.06
n38	15	30	2595	CP	64QAM	Inner_Full	22.85	20.95	21.65
n38	15	30	2595	CP	64QAM	Edge_1RB_Left	20.44	18.54	19.24
n38	15	30	2595	CP	64QAM	Edge_1RB_Right	20.47	18.57	19.27
n38	15	30	2595	CP	64QAM	Outer_Full	20.75	18.85	19.55
n38	15	30	2595	CP	256QAM	Inner_Full	20.22	18.32	19.02
n38	15	30	2595	CP	256QAM	Edge_1RB_Left	17.44	15.54	16.24
n38	15	30	2595	CP	256QAM	Edge_1RB_Right	17.50	15.60	16.30
n38	15	30	2595	CP	256QAM	Outer_Full	20.16	18.26	18.96
n38	15	30	2612.5	DFT	QPSK	Inner_Full	24.44	22.54	23.24
n38	15	30	2612.5	DFT	QPSK	Edge_1RB_Left	20.71	18.81	19.51
n38	15	30	2612.5	DFT	QPSK	Edge_1RB_Right	20.67	18.77	19.47
n38	15	30	2612.5	DFT	QPSK	Outer_Full	23.31	21.41	22.11
n38	15	30	2612.5	DFT	16QAM	Inner_Full	24.06	22.16	22.86
n38	15	30	2612.5	DFT	16QAM	Edge_1RB_Left	21.79	19.89	20.59
n38	15	30	2612.5	DFT	16QAM	Edge_1RB_Right	21.92	20.02	20.72
n38	15	30	2612.5	DFT	16QAM	Outer_Full	22.18	20.28	20.98
n38	15	30	2612.5	DFT	64QAM	Inner_Full	22.96	21.06	21.76
n38	15	30	2612.5	DFT	64QAM	Edge_1RB_Left	21.27	19.37	20.07
n38	15	30	2612.5	DFT	64QAM	Edge_1RB_Right	21.36	19.46	20.16
n38	15	30	2612.5	DFT	64QAM	Outer_Full	21.72	19.82	20.52
n38	15	30	2612.5	DFT	256QAM	Inner_Full	21.44	19.54	20.24
n38	15	30	2612.5	DFT	256QAM	Edge_1RB_Left	19.43	17.53	18.23
n38	15	30	2612.5	DFT	256QAM	Edge_1RB_Right	19.48	17.58	18.28
n38	15	30	2612.5	DFT	256QAM	Outer_Full	21.50	19.60	20.30
n38	15	30	2612.5	CP	QPSK	Inner_Full	23.82	21.92	22.62
n38	15	30	2612.5	CP	QPSK	Edge_1RB_Left	21.20	19.30	20.00



BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n38	15	30	2612.5	CP	QPSK	Edge_1RB_Right	21.28	19.38	20.08
n38	15	30	2612.5	CP	QPSK	Outer_Full	21.33	19.43	20.13
n38	15	30	2612.5	CP	16QAM	Inner_Full	23.39	21.49	22.19
n38	15	30	2612.5	CP	16QAM	Edge_1RB_Left	20.99	19.09	19.79
n38	15	30	2612.5	CP	16QAM	Edge_1RB_Right	21.03	19.13	19.83
n38	15	30	2612.5	CP	16QAM	Outer_Full	21.36	19.46	20.16
n38	15	30	2612.5	CP	64QAM	Inner_Full	23.05	21.15	21.85
n38	15	30	2612.5	CP	64QAM	Edge_1RB_Left	20.43	18.53	19.23
n38	15	30	2612.5	CP	64QAM	Edge_1RB_Right	20.43	18.53	19.23
n38	15	30	2612.5	CP	64QAM	Outer_Full	20.75	18.85	19.55
n38	15	30	2612.5	CP	256QAM	Inner_Full	20.37	18.47	19.17
n38	15	30	2612.5	CP	256QAM	Edge_1RB_Left	17.43	15.53	16.23
n38	15	30	2612.5	CP	256QAM	Edge_1RB_Right	17.44	15.54	16.24
n38	15	30	2612.5	CP	256QAM	Outer_Full	20.38	18.48	19.18
n38	20	30	2580	DFT	QPSK	Inner_Full	24.30	22.40	23.10
n38	20	30	2580	DFT	QPSK	Edge_1RB_Left	20.61	18.71	19.41
n38	20	30	2580	DFT	QPSK	Edge_1RB_Right	20.41	18.51	19.21
n38	20	30	2580	DFT	QPSK	Outer_Full	23.29	21.39	22.09
n38	20	30	2580	DFT	16QAM	Inner_Full	24.20	22.30	23.00
n38	20	30	2580	DFT	16QAM	Edge_1RB_Left	21.75	19.85	20.55
n38	20	30	2580	DFT	16QAM	Edge_1RB_Right	21.67	19.77	20.47
n38	20	30	2580	DFT	16QAM	Outer_Full	22.04	20.14	20.84
n38	20	30	2580	DFT	64QAM	Inner_Full	23.06	21.16	21.86
n38	20	30	2580	DFT	64QAM	Edge_1RB_Left	20.99	19.09	19.79
n38	20	30	2580	DFT	64QAM	Edge_1RB_Right	20.96	19.06	19.76
n38	20	30	2580	DFT	64QAM	Outer_Full	21.65	19.75	20.45
n38	20	30	2580	DFT	256QAM	Inner_Full	21.48	19.58	20.28
n38	20	30	2580	DFT	256QAM	Edge_1RB_Left	19.27	17.37	18.07
n38	20	30	2580	DFT	256QAM	Edge_1RB_Right	19.23	17.33	18.03
n38	20	30	2580	DFT	256QAM	Outer_Full	21.33	19.43	20.13



BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n38	20	30	2580	CP	QPSK	Inner_Full	23.87	21.97	22.67
n38	20	30	2580	CP	QPSK	Edge_1RB_Left	21.16	19.26	19.96
n38	20	30	2580	CP	QPSK	Edge_1RB_Right	21.00	19.10	19.80
n38	20	30	2580	CP	QPSK	Outer_Full	20.16	18.26	18.96
n38	20	30	2580	CP	16QAM	Inner_Full	23.60	21.70	22.40
n38	20	30	2580	CP	16QAM	Edge_1RB_Left	20.84	18.94	19.64
n38	20	30	2580	CP	16QAM	Edge_1RB_Right	20.79	18.89	19.59
n38	20	30	2580	CP	16QAM	Outer_Full	21.08	19.18	19.88
n38	20	30	2580	CP	64QAM	Inner_Full	23.08	21.18	21.88
n38	20	30	2580	CP	64QAM	Edge_1RB_Left	20.28	18.38	19.08
n38	20	30	2580	CP	64QAM	Edge_1RB_Right	20.25	18.35	19.05
n38	20	30	2580	CP	64QAM	Outer_Full	20.59	18.69	19.39
n38	20	30	2580	CP	256QAM	Inner_Full	20.47	18.57	19.27
n38	20	30	2580	CP	256QAM	Edge_1RB_Left	17.27	15.37	16.07
n38	20	30	2580	CP	256QAM	Edge_1RB_Right	17.21	15.31	16.01
n38	20	30	2580	CP	256QAM	Outer_Full	20.37	18.47	19.17
n38	20	30	2595	DFT	QPSK	Inner_Full	24.41	22.51	23.21
n38	20	30	2595	DFT	QPSK	Edge_1RB_Left	20.58	18.68	19.38
n38	20	30	2595	DFT	QPSK	Edge_1RB_Right	20.65	18.75	19.45
n38	20	30	2595	DFT	QPSK	Outer_Full	23.32	21.42	22.12
n38	20	30	2595	DFT	16QAM	Inner_Full	24.22	22.32	23.02
n38	20	30	2595	DFT	16QAM	Edge_1RB_Left	21.86	19.96	20.66
n38	20	30	2595	DFT	16QAM	Edge_1RB_Right	21.97	20.07	20.77
n38	20	30	2595	DFT	16QAM	Outer_Full	22.14	20.24	20.94
n38	20	30	2595	DFT	64QAM	Inner_Full	22.74	20.84	21.54
n38	20	30	2595	DFT	64QAM	Edge_1RB_Left	21.11	19.21	19.91
n38	20	30	2595	DFT	64QAM	Edge_1RB_Right	21.23	19.33	20.03
n38	20	30	2595	DFT	64QAM	Outer_Full	21.67	19.77	20.47
n38	20	30	2595	DFT	256QAM	Inner_Full	21.13	19.23	19.93
n38	20	30	2595	DFT	256QAM	Edge_1RB_Left	19.39	17.49	18.19



BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n38	20	30	2595	DFT	256QAM	Edge_1RB_Right	19.39	17.49	18.19
n38	20	30	2595	DFT	256QAM	Outer_Full	21.23	19.33	20.03
n38	20	30	2595	CP	QPSK	Inner_Full	23.63	21.73	22.43
n38	20	30	2595	CP	QPSK	Edge_1RB_Left	21.16	19.26	19.96
n38	20	30	2595	CP	QPSK	Edge_1RB_Right	21.25	19.35	20.05
n38	20	30	2595	CP	QPSK	Outer_Full	20.19	18.29	18.99
n38	20	30	2595	CP	16QAM	Inner_Full	23.17	21.27	21.97
n38	20	30	2595	CP	16QAM	Edge_1RB_Left	20.99	19.09	19.79
n38	20	30	2595	CP	16QAM	Edge_1RB_Right	21.16	19.26	19.96
n38	20	30	2595	CP	16QAM	Outer_Full	21.12	19.22	19.92
n38	20	30	2595	CP	64QAM	Inner_Full	22.71	20.81	21.51
n38	20	30	2595	CP	64QAM	Edge_1RB_Left	20.38	18.48	19.18
n38	20	30	2595	CP	64QAM	Edge_1RB_Right	20.50	18.60	19.30
n38	20	30	2595	CP	64QAM	Outer_Full	20.64	18.74	19.44
n38	20	30	2595	CP	256QAM	Inner_Full	20.18	18.28	18.98
n38	20	30	2595	CP	256QAM	Edge_1RB_Left	17.39	15.49	16.19
n38	20	30	2595	CP	256QAM	Edge_1RB_Right	17.32	15.42	16.12
n38	20	30	2595	CP	256QAM	Outer_Full	20.21	18.31	19.01
n38	20	30	2610	DFT	QPSK	Inner_Full	24.33	22.43	23.13
n38	20	30	2610	DFT	QPSK	Edge_1RB_Left	20.62	18.72	19.42
n38	20	30	2610	DFT	QPSK	Edge_1RB_Right	20.63	18.73	19.43
n38	20	30	2610	DFT	QPSK	Outer_Full	23.42	21.52	22.22
n38	20	30	2610	DFT	16QAM	Inner_Full	24.27	22.37	23.07
n38	20	30	2610	DFT	16QAM	Edge_1RB_Left	21.82	19.92	20.62
n38	20	30	2610	DFT	16QAM	Edge_1RB_Right	21.92	20.02	20.72
n38	20	30	2610	DFT	16QAM	Outer_Full	22.14	20.24	20.94
n38	20	30	2610	DFT	64QAM	Inner_Full	22.90	21.00	21.70
n38	20	30	2610	DFT	64QAM	Edge_1RB_Left	21.14	19.24	19.94
n38	20	30	2610	DFT	64QAM	Edge_1RB_Right	21.18	19.28	19.98
n38	20	30	2610	DFT	64QAM	Outer_Full	21.70	19.80	20.50



BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n38	20	30	2610	DFT	256QAM	Inner_Full	21.34	19.44	20.14
n38	20	30	2610	DFT	256QAM	Edge_1RB_Left	19.37	17.47	18.17
n38	20	30	2610	DFT	256QAM	Edge_1RB_Right	19.46	17.56	18.26
n38	20	30	2610	DFT	256QAM	Outer_Full	21.29	19.39	20.09
n38	20	30	2610	CP	QPSK	Inner_Full	23.82	21.92	22.62
n38	20	30	2610	CP	QPSK	Edge_1RB_Left	21.15	19.25	19.95
n38	20	30	2610	CP	QPSK	Edge_1RB_Right	21.20	19.30	20.00
n38	20	30	2610	CP	QPSK	Outer_Full	20.33	18.43	19.13
n38	20	30	2610	CP	16QAM	Inner_Full	23.41	21.51	22.21
n38	20	30	2610	CP	16QAM	Edge_1RB_Left	20.88	18.98	19.68
n38	20	30	2610	CP	16QAM	Edge_1RB_Right	21.02	19.12	19.82
n38	20	30	2610	CP	16QAM	Outer_Full	21.23	19.33	20.03
n38	20	30	2610	CP	64QAM	Inner_Full	22.92	21.02	21.72
n38	20	30	2610	CP	64QAM	Edge_1RB_Left	20.37	18.47	19.17
n38	20	30	2610	CP	64QAM	Edge_1RB_Right	20.52	18.62	19.32
n38	20	30	2610	CP	64QAM	Outer_Full	20.75	18.85	19.55
n38	20	30	2610	CP	256QAM	Inner_Full	20.30	18.40	19.10
n38	20	30	2610	CP	256QAM	Edge_1RB_Left	17.33	15.43	16.13
n38	20	30	2610	CP	256QAM	Edge_1RB_Right	17.42	15.52	16.22
n38	20	30	2610	CP	256QAM	Outer_Full	20.28	18.38	19.08
n38	25	30	2582.5	DFT	QPSK	Inner_Full	24.42	22.52	23.22
n38	25	30	2582.5	DFT	QPSK	Edge_1RB_Left	20.84	18.94	19.64
n38	25	30	2582.5	DFT	QPSK	Edge_1RB_Right	20.73	18.83	19.53
n38	25	30	2582.5	DFT	QPSK	Outer_Full	23.38	21.48	22.18
n38	25	30	2582.5	DFT	16QAM	Inner_Full	24.17	22.27	22.97
n38	25	30	2582.5	DFT	16QAM	Edge_1RB_Left	22.01	20.11	20.81
n38	25	30	2582.5	DFT	16QAM	Edge_1RB_Right	21.85	19.95	20.65
n38	25	30	2582.5	DFT	16QAM	Outer_Full	22.26	20.36	21.06
n38	25	30	2582.5	DFT	64QAM	Inner_Full	23.05	21.15	21.85
n38	25	30	2582.5	DFT	64QAM	Edge_1RB_Left	21.50	19.60	20.30



BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n38	25	30	2582.5	DFT	64QAM	Edge_1RB_Right	21.38	19.48	20.18
n38	25	30	2582.5	DFT	64QAM	Outer_Full	21.81	19.91	20.61
n38	25	30	2582.5	DFT	256QAM	Inner_Full	21.46	19.56	20.26
n38	25	30	2582.5	DFT	256QAM	Edge_1RB_Left	19.62	17.72	18.42
n38	25	30	2582.5	DFT	256QAM	Edge_1RB_Right	19.48	17.58	18.28
n38	25	30	2582.5	DFT	256QAM	Outer_Full	21.41	19.51	20.21
n38	25	30	2582.5	CP	QPSK	Inner_Full	23.92	22.02	22.72
n38	25	30	2582.5	CP	QPSK	Edge_1RB_Left	21.30	19.40	20.10
n38	25	30	2582.5	CP	QPSK	Edge_1RB_Right	21.30	19.40	20.10
n38	25	30	2582.5	CP	QPSK	Outer_Full	21.44	19.54	20.24
n38	25	30	2582.5	CP	16QAM	Inner_Full	23.46	21.56	22.26
n38	25	30	2582.5	CP	16QAM	Edge_1RB_Left	21.17	19.27	19.97
n38	25	30	2582.5	CP	16QAM	Edge_1RB_Right	21.08	19.18	19.88
n38	25	30	2582.5	CP	16QAM	Outer_Full	21.31	19.41	20.11
n38	25	30	2582.5	CP	64QAM	Inner_Full	23.04	21.14	21.84
n38	25	30	2582.5	CP	64QAM	Edge_1RB_Left	20.62	18.72	19.42
n38	25	30	2582.5	CP	64QAM	Edge_1RB_Right	20.54	18.64	19.34
n38	25	30	2582.5	CP	64QAM	Outer_Full	20.87	18.97	19.67
n38	25	30	2582.5	CP	256QAM	Inner_Full	20.48	18.58	19.28
n38	25	30	2582.5	CP	256QAM	Edge_1RB_Left	17.59	15.69	16.39
n38	25	30	2582.5	CP	256QAM	Edge_1RB_Right	17.49	15.59	16.29
n38	25	30	2582.5	CP	256QAM	Outer_Full	20.36	18.46	19.16
n38	25	30	2595	DFT	QPSK	Inner_Full	24.41	22.51	23.21
n38	25	30	2595	DFT	QPSK	Edge_1RB_Left	20.92	19.02	19.72
n38	25	30	2595	DFT	QPSK	Edge_1RB_Right	20.85	18.95	19.65
n38	25	30	2595	DFT	QPSK	Outer_Full	23.45	21.55	22.25
n38	25	30	2595	DFT	16QAM	Inner_Full	24.07	22.17	22.87
n38	25	30	2595	DFT	16QAM	Edge_1RB_Left	22.22	20.32	21.02
n38	25	30	2595	DFT	16QAM	Edge_1RB_Right	22.14	20.24	20.94
n38	25	30	2595	DFT	16QAM	Outer_Full	22.34	20.44	21.14



BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n38	25	30	2595	DFT	64QAM	Inner_Full	22.78	20.88	21.58
n38	25	30	2595	DFT	64QAM	Edge_1RB_Left	21.44	19.54	20.24
n38	25	30	2595	DFT	64QAM	Edge_1RB_Right	21.37	19.47	20.17
n38	25	30	2595	DFT	64QAM	Outer_Full	21.84	19.94	20.64
n38	25	30	2595	DFT	256QAM	Inner_Full	21.14	19.24	19.94
n38	25	30	2595	DFT	256QAM	Edge_1RB_Left	19.74	17.84	18.54
n38	25	30	2595	DFT	256QAM	Edge_1RB_Right	19.68	17.78	18.48
n38	25	30	2595	DFT	256QAM	Outer_Full	21.35	19.45	20.15
n38	25	30	2595	CP	QPSK	Inner_Full	23.67	21.77	22.47
n38	25	30	2595	CP	QPSK	Edge_1RB_Left	21.45	19.55	20.25
n38	25	30	2595	CP	QPSK	Edge_1RB_Right	21.40	19.50	20.20
n38	25	30	2595	CP	QPSK	Outer_Full	21.47	19.57	20.27
n38	25	30	2595	CP	16QAM	Inner_Full	23.24	21.34	22.04
n38	25	30	2595	CP	16QAM	Edge_1RB_Left	21.43	19.53	20.23
n38	25	30	2595	CP	16QAM	Edge_1RB_Right	21.41	19.51	20.21
n38	25	30	2595	CP	16QAM	Outer_Full	21.32	19.42	20.12
n38	25	30	2595	CP	64QAM	Inner_Full	22.82	20.92	21.62
n38	25	30	2595	CP	64QAM	Edge_1RB_Left	20.64	18.74	19.44
n38	25	30	2595	CP	64QAM	Edge_1RB_Right	20.63	18.73	19.43
n38	25	30	2595	CP	64QAM	Outer_Full	20.91	19.01	19.71
n38	25	30	2595	CP	256QAM	Inner_Full	20.26	18.36	19.06
n38	25	30	2595	CP	256QAM	Edge_1RB_Left	17.63	15.73	16.43
n38	25	30	2595	CP	256QAM	Edge_1RB_Right	17.59	15.69	16.39
n38	25	30	2595	CP	256QAM	Outer_Full	20.29	18.39	19.09
n38	25	30	2607.5	DFT	QPSK	Inner_Full	24.38	22.48	23.18
n38	25	30	2607.5	DFT	QPSK	Edge_1RB_Left	20.78	18.88	19.58
n38	25	30	2607.5	DFT	QPSK	Edge_1RB_Right	20.87	18.97	19.67
n38	25	30	2607.5	DFT	QPSK	Outer_Full	23.41	21.51	22.21
n38	25	30	2607.5	DFT	16QAM	Inner_Full	24.15	22.25	22.95
n38	25	30	2607.5	DFT	16QAM	Edge_1RB_Left	22.03	20.13	20.83



BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n38	25	30	2607.5	DFT	16QAM	Edge_1RB_Right	22.14	20.24	20.94
n38	25	30	2607.5	DFT	16QAM	Outer_Full	22.37	20.47	21.17
n38	25	30	2607.5	DFT	64QAM	Inner_Full	22.85	20.95	21.65
n38	25	30	2607.5	DFT	64QAM	Edge_1RB_Left	21.34	19.44	20.14
n38	25	30	2607.5	DFT	64QAM	Edge_1RB_Right	21.39	19.49	20.19
n38	25	30	2607.5	DFT	64QAM	Outer_Full	21.87	19.97	20.67
n38	25	30	2607.5	DFT	256QAM	Inner_Full	21.30	19.40	20.10
n38	25	30	2607.5	DFT	256QAM	Edge_1RB_Left	19.58	17.68	18.38
n38	25	30	2607.5	DFT	256QAM	Edge_1RB_Right	19.64	17.74	18.44
n38	25	30	2607.5	DFT	256QAM	Outer_Full	21.43	19.53	20.23
n38	25	30	2607.5	CP	QPSK	Inner_Full	23.74	21.84	22.54
n38	25	30	2607.5	CP	QPSK	Edge_1RB_Left	21.35	19.45	20.15
n38	25	30	2607.5	CP	QPSK	Edge_1RB_Right	21.46	19.56	20.26
n38	25	30	2607.5	CP	QPSK	Outer_Full	21.44	19.54	20.24
n38	25	30	2607.5	CP	16QAM	Inner_Full	23.32	21.42	22.12
n38	25	30	2607.5	CP	16QAM	Edge_1RB_Left	21.18	19.28	19.98
n38	25	30	2607.5	CP	16QAM	Edge_1RB_Right	21.31	19.41	20.11
n38	25	30	2607.5	CP	16QAM	Outer_Full	21.33	19.43	20.13
n38	25	30	2607.5	CP	64QAM	Inner_Full	22.91	21.01	21.71
n38	25	30	2607.5	CP	64QAM	Edge_1RB_Left	20.54	18.64	19.34
n38	25	30	2607.5	CP	64QAM	Edge_1RB_Right	20.60	18.70	19.40
n38	25	30	2607.5	CP	64QAM	Outer_Full	20.89	18.99	19.69
n38	25	30	2607.5	CP	256QAM	Inner_Full	20.37	18.47	19.17
n38	25	30	2607.5	CP	256QAM	Edge_1RB_Left	17.59	15.69	16.39
n38	25	30	2607.5	CP	256QAM	Edge_1RB_Right	17.59	15.69	16.39
n38	25	30	2607.5	CP	256QAM	Outer_Full	20.38	18.48	19.18
n38	30	30	2585	DFT	QPSK	Inner_Full	24.46	22.56	23.26
n38	30	30	2585	DFT	QPSK	Edge_1RB_Left	20.83	18.93	19.63
n38	30	30	2585	DFT	QPSK	Edge_1RB_Right	20.76	18.86	19.56
n38	30	30	2585	DFT	QPSK	Outer_Full	23.45	21.55	22.25



BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n38	30	30	2585	DFT	16QAM	Inner_Full	24.24	22.34	23.04
n38	30	30	2585	DFT	16QAM	Edge_1RB_Left	22.05	20.15	20.85
n38	30	30	2585	DFT	16QAM	Edge_1RB_Right	21.92	20.02	20.72
n38	30	30	2585	DFT	16QAM	Outer_Full	22.34	20.44	21.14
n38	30	30	2585	DFT	64QAM	Inner_Full	23.07	21.17	21.87
n38	30	30	2585	DFT	64QAM	Edge_1RB_Left	21.57	19.67	20.37
n38	30	30	2585	DFT	64QAM	Edge_1RB_Right	21.43	19.53	20.23
n38	30	30	2585	DFT	64QAM	Outer_Full	21.84	19.94	20.64
n38	30	30	2585	DFT	256QAM	Inner_Full	21.50	19.60	20.30
n38	30	30	2585	DFT	256QAM	Edge_1RB_Left	19.64	17.74	18.44
n38	30	30	2585	DFT	256QAM	Edge_1RB_Right	19.52	17.62	18.32
n38	30	30	2585	DFT	256QAM	Outer_Full	21.38	19.48	20.18
n38	30	30	2585	CP	QPSK	Inner_Full	23.85	21.95	22.65
n38	30	30	2585	CP	QPSK	Edge_1RB_Left	21.39	19.49	20.19
n38	30	30	2585	CP	QPSK	Edge_1RB_Right	21.37	19.47	20.17
n38	30	30	2585	CP	QPSK	Outer_Full	21.40	19.50	20.20
n38	30	30	2585	CP	16QAM	Inner_Full	23.44	21.54	22.24
n38	30	30	2585	CP	16QAM	Edge_1RB_Left	21.15	19.25	19.95
n38	30	30	2585	CP	16QAM	Edge_1RB_Right	21.05	19.15	19.85
n38	30	30	2585	CP	16QAM	Outer_Full	21.41	19.51	20.21
n38	30	30	2585	CP	64QAM	Inner_Full	22.97	21.07	21.77
n38	30	30	2585	CP	64QAM	Edge_1RB_Left	20.66	18.76	19.46
n38	30	30	2585	CP	64QAM	Edge_1RB_Right	20.54	18.64	19.34
n38	30	30	2585	CP	64QAM	Outer_Full	20.80	18.90	19.60
n38	30	30	2585	CP	256QAM	Inner_Full	20.47	18.57	19.27
n38	30	30	2585	CP	256QAM	Edge_1RB_Left	17.62	15.72	16.42
n38	30	30	2585	CP	256QAM	Edge_1RB_Right	17.52	15.62	16.32
n38	30	30	2585	CP	256QAM	Outer_Full	20.34	18.44	19.14
n38	30	30	2595	DFT	QPSK	Inner_Full	24.39	22.49	23.19
n38	30	30	2595	DFT	QPSK	Edge_1RB_Left	20.94	19.04	19.74



BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n38	30	30	2595	DFT	QPSK	Edge_1RB_Right	20.89	18.99	19.69
n38	30	30	2595	DFT	QPSK	Outer_Full	23.45	21.55	22.25
n38	30	30	2595	DFT	16QAM	Inner_Full	24.22	22.32	23.02
n38	30	30	2595	DFT	16QAM	Edge_1RB_Left	22.12	20.22	20.92
n38	30	30	2595	DFT	16QAM	Edge_1RB_Right	22.06	20.16	20.86
n38	30	30	2595	DFT	16QAM	Outer_Full	22.37	20.47	21.17
n38	30	30	2595	DFT	64QAM	Inner_Full	22.74	20.84	21.54
n38	30	30	2595	DFT	64QAM	Edge_1RB_Left	21.57	19.67	20.37
n38	30	30	2595	DFT	64QAM	Edge_1RB_Right	21.50	19.60	20.30
n38	30	30	2595	DFT	64QAM	Outer_Full	21.85	19.95	20.65
n38	30	30	2595	DFT	256QAM	Inner_Full	21.23	19.33	20.03
n38	30	30	2595	DFT	256QAM	Edge_1RB_Left	19.69	17.79	18.49
n38	30	30	2595	DFT	256QAM	Edge_1RB_Right	19.65	17.75	18.45
n38	30	30	2595	DFT	256QAM	Outer_Full	21.38	19.48	20.18
n38	30	30	2595	CP	QPSK	Inner_Full	23.64	21.74	22.44
n38	30	30	2595	CP	QPSK	Edge_1RB_Left	21.45	19.55	20.25
n38	30	30	2595	CP	QPSK	Edge_1RB_Right	21.41	19.51	20.21
n38	30	30	2595	CP	QPSK	Outer_Full	21.35	19.45	20.15
n38	30	30	2595	CP	16QAM	Inner_Full	23.23	21.33	22.03
n38	30	30	2595	CP	16QAM	Edge_1RB_Left	21.22	19.32	20.02
n38	30	30	2595	CP	16QAM	Edge_1RB_Right	21.23	19.33	20.03
n38	30	30	2595	CP	16QAM	Outer_Full	21.42	19.52	20.22
n38	30	30	2595	CP	64QAM	Inner_Full	22.77	20.87	21.57
n38	30	30	2595	CP	64QAM	Edge_1RB_Left	20.69	18.79	19.49
n38	30	30	2595	CP	64QAM	Edge_1RB_Right	20.72	18.82	19.52
n38	30	30	2595	CP	64QAM	Outer_Full	20.92	19.02	19.72
n38	30	30	2595	CP	256QAM	Inner_Full	20.35	18.45	19.15
n38	30	30	2595	CP	256QAM	Edge_1RB_Left	17.69	15.79	16.49
n38	30	30	2595	CP	256QAM	Edge_1RB_Right	17.61	15.71	16.41
n38	30	30	2595	CP	256QAM	Outer_Full	20.30	18.40	19.10



BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n38	30	30	2605	DFT	QPSK	Inner_Full	24.45	22.55	23.25
n38	30	30	2605	DFT	QPSK	Edge_1RB_Left	20.82	18.92	19.62
n38	30	30	2605	DFT	QPSK	Edge_1RB_Right	20.87	18.97	19.67
n38	30	30	2605	DFT	QPSK	Outer_Full	23.46	21.56	22.26
n38	30	30	2605	DFT	16QAM	Inner_Full	24.04	22.14	22.84
n38	30	30	2605	DFT	16QAM	Edge_1RB_Left	22.08	20.18	20.88
n38	30	30	2605	DFT	16QAM	Edge_1RB_Right	22.17	20.27	20.97
n38	30	30	2605	DFT	16QAM	Outer_Full	22.39	20.49	21.19
n38	30	30	2605	DFT	64QAM	Inner_Full	22.68	20.78	21.48
n38	30	30	2605	DFT	64QAM	Edge_1RB_Left	21.33	19.43	20.13
n38	30	30	2605	DFT	64QAM	Edge_1RB_Right	21.39	19.49	20.19
n38	30	30	2605	DFT	64QAM	Outer_Full	21.88	19.98	20.68
n38	30	30	2605	DFT	256QAM	Inner_Full	21.36	19.46	20.16
n38	30	30	2605	DFT	256QAM	Edge_1RB_Left	19.56	17.66	18.36
n38	30	30	2605	DFT	256QAM	Edge_1RB_Right	19.61	17.71	18.41
n38	30	30	2605	DFT	256QAM	Outer_Full	21.37	19.47	20.17
n38	30	30	2605	CP	QPSK	Inner_Full	23.78	21.88	22.58
n38	30	30	2605	CP	QPSK	Edge_1RB_Left	21.38	19.48	20.18
n38	30	30	2605	CP	QPSK	Edge_1RB_Right	21.37	19.47	20.17
n38	30	30	2605	CP	QPSK	Outer_Full	21.32	19.42	20.12
n38	30	30	2605	CP	16QAM	Inner_Full	23.33	21.43	22.13
n38	30	30	2605	CP	16QAM	Edge_1RB_Left	21.08	19.18	19.88
n38	30	30	2605	CP	16QAM	Edge_1RB_Right	21.18	19.28	19.98
n38	30	30	2605	CP	16QAM	Outer_Full	21.38	19.48	20.18
n38	30	30	2605	CP	64QAM	Inner_Full	22.82	20.92	21.62
n38	30	30	2605	CP	64QAM	Edge_1RB_Left	20.62	18.72	19.42
n38	30	30	2605	CP	64QAM	Edge_1RB_Right	20.73	18.83	19.53
n38	30	30	2605	CP	64QAM	Outer_Full	20.91	19.01	19.71
n38	30	30	2605	CP	256QAM	Inner_Full	20.34	18.44	19.14
n38	30	30	2605	CP	256QAM	Edge_1RB_Left	17.60	15.70	16.40



BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n38	30	30	2605	CP	256QAM	Edge_1RB_Right	17.64	15.74	16.44
n38	30	30	2605	CP	256QAM	Outer_Full	20.40	18.50	19.20
n38	40	30	2590	DFT	QPSK	Inner_Full	24.51	22.61	23.31
n38	40	30	2590	DFT	QPSK	Edge_1RB_Left	20.86	18.96	19.66
n38	40	30	2590	DFT	QPSK	Edge_1RB_Right	20.86	18.96	19.66
n38	40	30	2590	DFT	QPSK	Outer_Full	23.63	21.73	22.43
n38	40	30	2590	DFT	16QAM	Inner_Full	24.23	22.33	23.03
n38	40	30	2590	DFT	16QAM	Edge_1RB_Left	22.02	20.12	20.82
n38	40	30	2590	DFT	16QAM	Edge_1RB_Right	21.98	20.08	20.78
n38	40	30	2590	DFT	16QAM	Outer_Full	22.43	20.53	21.23
n38	40	30	2590	DFT	64QAM	Inner_Full	22.87	20.97	21.67
n38	40	30	2590	DFT	64QAM	Edge_1RB_Left	21.40	19.50	20.20
n38	40	30	2590	DFT	64QAM	Edge_1RB_Right	21.33	19.43	20.13
n38	40	30	2590	DFT	64QAM	Outer_Full	21.90	20.00	20.70
n38	40	30	2590	DFT	256QAM	Inner_Full	21.35	19.45	20.15
n38	40	30	2590	DFT	256QAM	Edge_1RB_Left	19.61	17.71	18.41
n38	40	30	2590	DFT	256QAM	Edge_1RB_Right	19.61	17.71	18.41
n38	40	30	2590	DFT	256QAM	Outer_Full	21.46	19.56	20.26
n38	40	30	2590	CP	QPSK	Inner_Full	23.82	21.92	22.62
n38	40	30	2590	CP	QPSK	Edge_1RB_Left	21.42	19.52	20.22
n38	40	30	2590	CP	QPSK	Edge_1RB_Right	21.40	19.50	20.20
n38	40	30	2590	CP	QPSK	Outer_Full	21.51	19.61	20.31
n38	40	30	2590	CP	16QAM	Inner_Full	23.35	21.45	22.15
n38	40	30	2590	CP	16QAM	Edge_1RB_Left	21.15	19.25	19.95
n38	40	30	2590	CP	16QAM	Edge_1RB_Right	21.18	19.28	19.98
n38	40	30	2590	CP	16QAM	Outer_Full	21.47	19.57	20.27
n38	40	30	2590	CP	64QAM	Inner_Full	22.89	20.99	21.69
n38	40	30	2590	CP	64QAM	Edge_1RB_Left	20.65	18.75	19.45
n38	40	30	2590	CP	64QAM	Edge_1RB_Right	20.67	18.77	19.47
n38	40	30	2590	CP	64QAM	Outer_Full	20.92	19.02	19.72



BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n38	40	30	2590	CP	256QAM	Inner_Full	20.43	18.53	19.23
n38	40	30	2590	CP	256QAM	Edge_1RB_Left	17.55	15.65	16.35
n38	40	30	2590	CP	256QAM	Edge_1RB_Right	17.58	15.68	16.38
n38	40	30	2590	CP	256QAM	Outer_Full	20.45	18.55	19.25
n38	40	30	2595	DFT	QPSK	Inner_Full	24.44	22.54	23.24
n38	40	30	2595	DFT	QPSK	Edge_1RB_Left	20.94	19.04	19.74
n38	40	30	2595	DFT	QPSK	Edge_1RB_Right	20.83	18.93	19.63
n38	40	30	2595	DFT	QPSK	Outer_Full	23.56	21.66	22.36
n38	40	30	2595	DFT	16QAM	Inner_Full	24.22	22.32	23.02
n38	40	30	2595	DFT	16QAM	Edge_1RB_Left	22.09	20.19	20.89
n38	40	30	2595	DFT	16QAM	Edge_1RB_Right	22.14	20.24	20.94
n38	40	30	2595	DFT	16QAM	Outer_Full	22.39	20.49	21.19
n38	40	30	2595	DFT	64QAM	Inner_Full	22.77	20.87	21.57
n38	40	30	2595	DFT	64QAM	Edge_1RB_Left	21.39	19.49	20.19
n38	40	30	2595	DFT	64QAM	Edge_1RB_Right	21.47	19.57	20.27
n38	40	30	2595	DFT	64QAM	Outer_Full	21.86	19.96	20.66
n38	40	30	2595	DFT	256QAM	Inner_Full	21.25	19.35	20.05
n38	40	30	2595	DFT	256QAM	Edge_1RB_Left	19.69	17.79	18.49
n38	40	30	2595	DFT	256QAM	Edge_1RB_Right	19.61	17.71	18.41
n38	40	30	2595	DFT	256QAM	Outer_Full	21.46	19.56	20.26
n38	40	30	2595	CP	QPSK	Inner_Full	23.73	21.83	22.53
n38	40	30	2595	CP	QPSK	Edge_1RB_Left	21.45	19.55	20.25
n38	40	30	2595	CP	QPSK	Edge_1RB_Right	21.38	19.48	20.18
n38	40	30	2595	CP	QPSK	Outer_Full	21.44	19.54	20.24
n38	40	30	2595	CP	16QAM	Inner_Full	23.23	21.33	22.03
n38	40	30	2595	CP	16QAM	Edge_1RB_Left	21.21	19.31	20.01
n38	40	30	2595	CP	16QAM	Edge_1RB_Right	21.24	19.34	20.04
n38	40	30	2595	CP	16QAM	Outer_Full	21.34	19.44	20.14
n38	40	30	2595	CP	64QAM	Inner_Full	22.84	20.94	21.64
n38	40	30	2595	CP	64QAM	Edge_1RB_Left	20.57	18.67	19.37



BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n38	40	30	2595	CP	64QAM	Edge_1RB_Right	20.63	18.73	19.43
n38	40	30	2595	CP	64QAM	Outer_Full	20.96	19.06	19.76
n38	40	30	2595	CP	256QAM	Inner_Full	20.33	18.43	19.13
n38	40	30	2595	CP	256QAM	Edge_1RB_Left	17.58	15.68	16.38
n38	40	30	2595	CP	256QAM	Edge_1RB_Right	17.62	15.72	16.42
n38	40	30	2595	CP	256QAM	Outer_Full	20.47	18.57	19.27
n38	40	30	2600	DFT	QPSK	Inner_Full	24.41	22.51	23.21
n38	40	30	2600	DFT	QPSK	Edge_1RB_Left	20.85	18.95	19.65
n38	40	30	2600	DFT	QPSK	Edge_1RB_Right	20.86	18.96	19.66
n38	40	30	2600	DFT	QPSK	Outer_Full	23.49	21.59	22.29
n38	40	30	2600	DFT	16QAM	Inner_Full	24.20	22.30	23.00
n38	40	30	2600	DFT	16QAM	Edge_1RB_Left	22.13	20.23	20.93
n38	40	30	2600	DFT	16QAM	Edge_1RB_Right	22.10	20.20	20.90
n38	40	30	2600	DFT	16QAM	Outer_Full	22.34	20.44	21.14
n38	40	30	2600	DFT	64QAM	Inner_Full	22.76	20.86	21.56
n38	40	30	2600	DFT	64QAM	Edge_1RB_Left	21.40	19.50	20.20
n38	40	30	2600	DFT	64QAM	Edge_1RB_Right	21.34	19.44	20.14
n38	40	30	2600	DFT	64QAM	Outer_Full	21.83	19.93	20.63
n38	40	30	2600	DFT	256QAM	Inner_Full	21.19	19.29	19.99
n38	40	30	2600	DFT	256QAM	Edge_1RB_Left	19.60	17.70	18.40
n38	40	30	2600	DFT	256QAM	Edge_1RB_Right	19.58	17.68	18.38
n38	40	30	2600	DFT	256QAM	Outer_Full	21.46	19.56	20.26
n38	40	30	2600	CP	QPSK	Inner_Full	23.68	21.78	22.48
n38	40	30	2600	CP	QPSK	Edge_1RB_Left	21.43	19.53	20.23
n38	40	30	2600	CP	QPSK	Edge_1RB_Right	21.38	19.48	20.18
n38	40	30	2600	CP	QPSK	Outer_Full	21.41	19.51	20.21
n38	40	30	2600	CP	16QAM	Inner_Full	23.18	21.28	21.98
n38	40	30	2600	CP	16QAM	Edge_1RB_Left	21.24	19.34	20.04
n38	40	30	2600	CP	16QAM	Edge_1RB_Right	21.20	19.30	20.00
n38	40	30	2600	CP	16QAM	Outer_Full	21.31	19.41	20.11



BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n38	40	30	2600	CP	64QAM	Inner_Full	22.78	20.88	21.58
n38	40	30	2600	CP	64QAM	Edge_1RB_Left	20.46	18.56	19.26
n38	40	30	2600	CP	64QAM	Edge_1RB_Right	20.63	18.73	19.43
n38	40	30	2600	CP	64QAM	Outer_Full	20.83	18.93	19.63
n38	40	30	2600	CP	256QAM	Inner_Full	20.24	18.34	19.04
n38	40	30	2600	CP	256QAM	Edge_1RB_Left	17.63	15.73	16.43
n38	40	30	2600	CP	256QAM	Edge_1RB_Right	17.56	15.66	16.36
n38	40	30	2600	CP	256QAM	Outer_Full	20.45	18.55	19.25



n41

BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n41	10	30	2501.01	DFT	QPSK	Inner_Full	25.80	23.70	24.60
n41	10	30	2501.01	DFT	QPSK	Edge_1RB_Left	22.09	19.99	20.89
n41	10	30	2501.01	DFT	QPSK	Edge_1RB_Right	22.11	20.01	20.91
n41	10	30	2501.01	DFT	QPSK	Outer_Full	23.74	21.64	22.54
n41	10	30	2501.01	DFT	16QAM	Inner_Full	24.72	22.62	23.52
n41	10	30	2501.01	DFT	16QAM	Edge_1RB_Left	21.94	19.84	20.74
n41	10	30	2501.01	DFT	16QAM	Edge_1RB_Right	21.96	19.86	20.76
n41	10	30	2501.01	DFT	16QAM	Outer_Full	22.66	20.56	21.46
n41	10	30	2501.01	DFT	64QAM	Inner_Full	23.17	21.07	21.97
n41	10	30	2501.01	DFT	64QAM	Edge_1RB_Left	21.82	19.72	20.62
n41	10	30	2501.01	DFT	64QAM	Edge_1RB_Right	21.85	19.75	20.65
n41	10	30	2501.01	DFT	64QAM	Outer_Full	23.35	21.25	22.15
n41	10	30	2501.01	DFT	256QAM	Inner_Full	21.12	19.02	19.92
n41	10	30	2501.01	DFT	256QAM	Edge_1RB_Left	21.00	18.90	19.80
n41	10	30	2501.01	DFT	256QAM	Edge_1RB_Right	21.00	18.90	19.80
n41	10	30	2501.01	DFT	256QAM	Outer_Full	21.09	18.99	19.89
n41	10	30	2501.01	CP	QPSK	Inner_Full	24.21	22.11	23.01
n41	10	30	2501.01	CP	QPSK	Edge_1RB_Left	22.07	19.97	20.87
n41	10	30	2501.01	CP	QPSK	Edge_1RB_Right	22.16	20.06	20.96
n41	10	30	2501.01	CP	QPSK	Outer_Full	21.64	19.54	20.44
n41	10	30	2501.01	CP	16QAM	Inner_Full	23.76	21.66	22.56
n41	10	30	2501.01	CP	16QAM	Edge_1RB_Left	22.04	19.94	20.84
n41	10	30	2501.01	CP	16QAM	Edge_1RB_Right	22.14	20.04	20.94
n41	10	30	2501.01	CP	16QAM	Outer_Full	21.69	19.59	20.49
n41	10	30	2501.01	CP	64QAM	Inner_Full	22.20	20.10	21.00
n41	10	30	2501.01	CP	64QAM	Edge_1RB_Left	21.84	19.74	20.64
n41	10	30	2501.01	CP	64QAM	Edge_1RB_Right	21.94	19.84	20.74
n41	10	30	2501.01	CP	64QAM	Outer_Full	21.23	19.13	20.03



BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n41	10	30	2501.01	CP	256QAM	Inner_Full	19.11	17.01	17.91
n41	10	30	2501.01	CP	256QAM	Edge_1RB_Left	18.93	16.83	17.73
n41	10	30	2501.01	CP	256QAM	Edge_1RB_Right	18.91	16.81	17.71
n41	10	30	2501.01	CP	256QAM	Outer_Full	19.16	17.06	17.96
n41	10	30	2592.99	DFT	QPSK	Inner_Full	25.73	23.63	24.53
n41	10	30	2592.99	DFT	QPSK	Edge_1RB_Left	22.06	19.96	20.86
n41	10	30	2592.99	DFT	QPSK	Edge_1RB_Right	22.13	20.03	20.93
n41	10	30	2592.99	DFT	QPSK	Outer_Full	23.69	21.59	22.49
n41	10	30	2592.99	DFT	16QAM	Inner_Full	24.78	22.68	23.58
n41	10	30	2592.99	DFT	16QAM	Edge_1RB_Left	21.73	19.63	20.53
n41	10	30	2592.99	DFT	16QAM	Edge_1RB_Right	21.86	19.76	20.66
n41	10	30	2592.99	DFT	16QAM	Outer_Full	22.68	20.58	21.48
n41	10	30	2592.99	DFT	64QAM	Inner_Full	23.17	21.07	21.97
n41	10	30	2592.99	DFT	64QAM	Edge_1RB_Left	21.62	19.52	20.42
n41	10	30	2592.99	DFT	64QAM	Edge_1RB_Right	21.76	19.66	20.56
n41	10	30	2592.99	DFT	64QAM	Outer_Full	23.20	21.10	22.00
n41	10	30	2592.99	DFT	256QAM	Inner_Full	21.07	18.97	19.87
n41	10	30	2592.99	DFT	256QAM	Edge_1RB_Left	20.94	18.84	19.74
n41	10	30	2592.99	DFT	256QAM	Edge_1RB_Right	20.98	18.88	19.78
n41	10	30	2592.99	DFT	256QAM	Outer_Full	21.11	19.01	19.91
n41	10	30	2592.99	CP	QPSK	Inner_Full	24.17	22.07	22.97
n41	10	30	2592.99	CP	QPSK	Edge_1RB_Left	22.06	19.96	20.86
n41	10	30	2592.99	CP	QPSK	Edge_1RB_Right	22.15	20.05	20.95
n41	10	30	2592.99	CP	QPSK	Outer_Full	21.74	19.64	20.54
n41	10	30	2592.99	CP	16QAM	Inner_Full	23.79	21.69	22.59
n41	10	30	2592.99	CP	16QAM	Edge_1RB_Left	21.94	19.84	20.74
n41	10	30	2592.99	CP	16QAM	Edge_1RB_Right	21.99	19.89	20.79
n41	10	30	2592.99	CP	16QAM	Outer_Full	21.72	19.62	20.52
n41	10	30	2592.99	CP	64QAM	Inner_Full	22.21	20.11	21.01
n41	10	30	2592.99	CP	64QAM	Edge_1RB_Left	21.85	19.75	20.65



BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n41	10	30	2592.99	CP	64QAM	Edge_1RB_Right	21.79	19.69	20.59
n41	10	30	2592.99	CP	64QAM	Outer_Full	21.18	19.08	19.98
n41	10	30	2592.99	CP	256QAM	Inner_Full	19.08	16.98	17.88
n41	10	30	2592.99	CP	256QAM	Edge_1RB_Left	18.83	16.73	17.63
n41	10	30	2592.99	CP	256QAM	Edge_1RB_Right	18.90	16.80	17.70
n41	10	30	2592.99	CP	256QAM	Outer_Full	19.12	17.02	17.92
n41	10	30	2685	DFT	QPSK	Inner_Full	25.92	23.82	24.72
n41	10	30	2685	DFT	QPSK	Edge_1RB_Left	22.12	20.02	20.92
n41	10	30	2685	DFT	QPSK	Edge_1RB_Right	22.28	20.18	21.08
n41	10	30	2685	DFT	QPSK	Outer_Full	23.75	21.65	22.55
n41	10	30	2685	DFT	16QAM	Inner_Full	24.77	22.67	23.57
n41	10	30	2685	DFT	16QAM	Edge_1RB_Left	21.94	19.84	20.74
n41	10	30	2685	DFT	16QAM	Edge_1RB_Right	21.98	19.88	20.78
n41	10	30	2685	DFT	16QAM	Outer_Full	22.82	20.72	21.62
n41	10	30	2685	DFT	64QAM	Inner_Full	23.28	21.18	22.08
n41	10	30	2685	DFT	64QAM	Edge_1RB_Left	21.78	19.68	20.58
n41	10	30	2685	DFT	64QAM	Edge_1RB_Right	21.86	19.76	20.66
n41	10	30	2685	DFT	64QAM	Outer_Full	23.27	21.17	22.07
n41	10	30	2685	DFT	256QAM	Inner_Full	21.16	19.06	19.96
n41	10	30	2685	DFT	256QAM	Edge_1RB_Left	21.01	18.91	19.81
n41	10	30	2685	DFT	256QAM	Edge_1RB_Right	21.01	18.91	19.81
n41	10	30	2685	DFT	256QAM	Outer_Full	21.16	19.06	19.96
n41	10	30	2685	CP	QPSK	Inner_Full	24.32	22.22	23.12
n41	10	30	2685	CP	QPSK	Edge_1RB_Left	22.17	20.07	20.97
n41	10	30	2685	CP	QPSK	Edge_1RB_Right	22.24	20.14	21.04
n41	10	30	2685	CP	QPSK	Outer_Full	21.80	19.70	20.60
n41	10	30	2685	CP	16QAM	Inner_Full	23.81	21.71	22.61
n41	10	30	2685	CP	16QAM	Edge_1RB_Left	22.05	19.95	20.85
n41	10	30	2685	CP	16QAM	Edge_1RB_Right	22.06	19.96	20.86
n41	10	30	2685	CP	16QAM	Outer_Full	21.77	19.67	20.57



BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n41	10	30	2685	CP	64QAM	Inner_Full	22.31	20.21	21.11
n41	10	30	2685	CP	64QAM	Edge_1RB_Left	21.87	19.77	20.67
n41	10	30	2685	CP	64QAM	Edge_1RB_Right	21.91	19.81	20.71
n41	10	30	2685	CP	64QAM	Outer_Full	21.33	19.23	20.13
n41	10	30	2685	CP	256QAM	Inner_Full	19.22	17.12	18.02
n41	10	30	2685	CP	256QAM	Edge_1RB_Left	18.91	16.81	17.71
n41	10	30	2685	CP	256QAM	Edge_1RB_Right	18.93	16.83	17.73
n41	10	30	2685	CP	256QAM	Outer_Full	19.18	17.08	17.98
n41	15	30	2503.5	DFT	QPSK	Inner_Full	25.89	23.79	24.69
n41	15	30	2503.5	DFT	QPSK	Edge_1RB_Left	22.04	19.94	20.84
n41	15	30	2503.5	DFT	QPSK	Edge_1RB_Right	22.14	20.04	20.94
n41	15	30	2503.5	DFT	QPSK	Outer_Full	23.65	21.55	22.45
n41	15	30	2503.5	DFT	16QAM	Inner_Full	24.77	22.67	23.57
n41	15	30	2503.5	DFT	16QAM	Edge_1RB_Left	21.94	19.84	20.74
n41	15	30	2503.5	DFT	16QAM	Edge_1RB_Right	21.94	19.84	20.74
n41	15	30	2503.5	DFT	16QAM	Outer_Full	22.67	20.57	21.47
n41	15	30	2503.5	DFT	64QAM	Inner_Full	23.15	21.05	21.95
n41	15	30	2503.5	DFT	64QAM	Edge_1RB_Left	21.83	19.73	20.63
n41	15	30	2503.5	DFT	64QAM	Edge_1RB_Right	21.84	19.74	20.64
n41	15	30	2503.5	DFT	64QAM	Outer_Full	23.22	21.12	22.02
n41	15	30	2503.5	DFT	256QAM	Inner_Full	21.14	19.04	19.94
n41	15	30	2503.5	DFT	256QAM	Edge_1RB_Left	20.99	18.89	19.79
n41	15	30	2503.5	DFT	256QAM	Edge_1RB_Right	21.08	18.98	19.88
n41	15	30	2503.5	DFT	256QAM	Outer_Full	21.17	19.07	19.97
n41	15	30	2503.5	CP	QPSK	Inner_Full	24.51	22.41	23.31
n41	15	30	2503.5	CP	QPSK	Edge_1RB_Left	22.11	20.01	20.91
n41	15	30	2503.5	CP	QPSK	Edge_1RB_Right	22.14	20.04	20.94
n41	15	30	2503.5	CP	QPSK	Outer_Full	21.82	19.72	20.62
n41	15	30	2503.5	CP	16QAM	Inner_Full	23.80	21.70	22.60
n41	15	30	2503.5	CP	16QAM	Edge_1RB_Left	22.09	19.99	20.89



BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n41	15	30	2503.5	CP	16QAM	Edge_1RB_Right	22.11	20.01	20.91
n41	15	30	2503.5	CP	16QAM	Outer_Full	21.83	19.73	20.63
n41	15	30	2503.5	CP	64QAM	Inner_Full	22.32	20.22	21.12
n41	15	30	2503.5	CP	64QAM	Edge_1RB_Left	21.91	19.81	20.71
n41	15	30	2503.5	CP	64QAM	Edge_1RB_Right	21.91	19.81	20.71
n41	15	30	2503.5	CP	64QAM	Outer_Full	21.20	19.10	20.00
n41	15	30	2503.5	CP	256QAM	Inner_Full	19.17	17.07	17.97
n41	15	30	2503.5	CP	256QAM	Edge_1RB_Left	18.94	16.84	17.74
n41	15	30	2503.5	CP	256QAM	Edge_1RB_Right	18.96	16.86	17.76
n41	15	30	2503.5	CP	256QAM	Outer_Full	19.20	17.10	18.00
n41	15	30	2592.99	DFT	QPSK	Inner_Full	25.66	23.56	24.46
n41	15	30	2592.99	DFT	QPSK	Edge_1RB_Left	22.07	19.97	20.87
n41	15	30	2592.99	DFT	QPSK	Edge_1RB_Right	22.16	20.06	20.96
n41	15	30	2592.99	DFT	QPSK	Outer_Full	23.58	21.48	22.38
n41	15	30	2592.99	DFT	16QAM	Inner_Full	24.58	22.48	23.38
n41	15	30	2592.99	DFT	16QAM	Edge_1RB_Left	21.77	19.67	20.57
n41	15	30	2592.99	DFT	16QAM	Edge_1RB_Right	21.89	19.79	20.69
n41	15	30	2592.99	DFT	16QAM	Outer_Full	22.51	20.41	21.31
n41	15	30	2592.99	DFT	64QAM	Inner_Full	23.07	20.97	21.87
n41	15	30	2592.99	DFT	64QAM	Edge_1RB_Left	21.67	19.57	20.47
n41	15	30	2592.99	DFT	64QAM	Edge_1RB_Right	21.69	19.59	20.49
n41	15	30	2592.99	DFT	64QAM	Outer_Full	23.13	21.03	21.93
n41	15	30	2592.99	DFT	256QAM	Inner_Full	21.08	18.98	19.88
n41	15	30	2592.99	DFT	256QAM	Edge_1RB_Left	20.82	18.72	19.62
n41	15	30	2592.99	DFT	256QAM	Edge_1RB_Right	21.02	18.92	19.82
n41	15	30	2592.99	DFT	256QAM	Outer_Full	21.11	19.01	19.91
n41	15	30	2592.99	CP	QPSK	Inner_Full	24.36	22.26	23.16
n41	15	30	2592.99	CP	QPSK	Edge_1RB_Left	21.98	19.88	20.78
n41	15	30	2592.99	CP	QPSK	Edge_1RB_Right	22.16	20.06	20.96
n41	15	30	2592.99	CP	QPSK	Outer_Full	21.65	19.55	20.45



BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n41	15	30	2592.99	CP	16QAM	Inner_Full	23.62	21.52	22.42
n41	15	30	2592.99	CP	16QAM	Edge_1RB_Left	21.90	19.80	20.70
n41	15	30	2592.99	CP	16QAM	Edge_1RB_Right	22.15	20.05	20.95
n41	15	30	2592.99	CP	16QAM	Outer_Full	21.65	19.55	20.45
n41	15	30	2592.99	CP	64QAM	Inner_Full	22.19	20.09	20.99
n41	15	30	2592.99	CP	64QAM	Edge_1RB_Left	21.75	19.65	20.55
n41	15	30	2592.99	CP	64QAM	Edge_1RB_Right	21.77	19.67	20.57
n41	15	30	2592.99	CP	64QAM	Outer_Full	21.13	19.03	19.93
n41	15	30	2592.99	CP	256QAM	Inner_Full	19.01	16.91	17.81
n41	15	30	2592.99	CP	256QAM	Edge_1RB_Left	18.82	16.72	17.62
n41	15	30	2592.99	CP	256QAM	Edge_1RB_Right	18.97	16.87	17.77
n41	15	30	2592.99	CP	256QAM	Outer_Full	19.10	17.00	17.90
n41	15	30	2682.48	DFT	QPSK	Inner_Full	25.68	23.58	24.48
n41	15	30	2682.48	DFT	QPSK	Edge_1RB_Left	22.03	19.93	20.83
n41	15	30	2682.48	DFT	QPSK	Edge_1RB_Right	22.08	19.98	20.88
n41	15	30	2682.48	DFT	QPSK	Outer_Full	23.67	21.57	22.47
n41	15	30	2682.48	DFT	16QAM	Inner_Full	24.70	22.60	23.50
n41	15	30	2682.48	DFT	16QAM	Edge_1RB_Left	21.85	19.75	20.65
n41	15	30	2682.48	DFT	16QAM	Edge_1RB_Right	21.97	19.87	20.77
n41	15	30	2682.48	DFT	16QAM	Outer_Full	22.68	20.58	21.48
n41	15	30	2682.48	DFT	64QAM	Inner_Full	23.09	20.99	21.89
n41	15	30	2682.48	DFT	64QAM	Edge_1RB_Left	21.78	19.68	20.58
n41	15	30	2682.48	DFT	64QAM	Edge_1RB_Right	21.83	19.73	20.63
n41	15	30	2682.48	DFT	64QAM	Outer_Full	23.23	21.13	22.03
n41	15	30	2682.48	DFT	256QAM	Inner_Full	21.07	18.97	19.87
n41	15	30	2682.48	DFT	256QAM	Edge_1RB_Left	20.96	18.86	19.76
n41	15	30	2682.48	DFT	256QAM	Edge_1RB_Right	21.00	18.90	19.80
n41	15	30	2682.48	DFT	256QAM	Outer_Full	21.19	19.09	19.99
n41	15	30	2682.48	CP	QPSK	Inner_Full	24.38	22.28	23.18
n41	15	30	2682.48	CP	QPSK	Edge_1RB_Left	22.04	19.94	20.84



BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n41	15	30	2682.48	CP	QPSK	Edge_1RB_Right	22.15	20.05	20.95
n41	15	30	2682.48	CP	QPSK	Outer_Full	21.77	19.67	20.57
n41	15	30	2682.48	CP	16QAM	Inner_Full	23.74	21.64	22.54
n41	15	30	2682.48	CP	16QAM	Edge_1RB_Left	21.94	19.84	20.74
n41	15	30	2682.48	CP	16QAM	Edge_1RB_Right	22.08	19.98	20.88
n41	15	30	2682.48	CP	16QAM	Outer_Full	21.77	19.67	20.57
n41	15	30	2682.48	CP	64QAM	Inner_Full	22.33	20.23	21.13
n41	15	30	2682.48	CP	64QAM	Edge_1RB_Left	21.81	19.71	20.61
n41	15	30	2682.48	CP	64QAM	Edge_1RB_Right	21.84	19.74	20.64
n41	15	30	2682.48	CP	64QAM	Outer_Full	21.24	19.14	20.04
n41	15	30	2682.48	CP	256QAM	Inner_Full	19.03	16.93	17.83
n41	15	30	2682.48	CP	256QAM	Edge_1RB_Left	18.88	16.78	17.68
n41	15	30	2682.48	CP	256QAM	Edge_1RB_Right	18.91	16.81	17.71
n41	15	30	2682.48	CP	256QAM	Outer_Full	19.14	17.04	17.94
n41	20	30	2506.02	DFT	QPSK	Inner_Full	25.79	23.69	24.59
n41	20	30	2506.02	DFT	QPSK	Edge_1RB_Left	22.03	19.93	20.83
n41	20	30	2506.02	DFT	QPSK	Edge_1RB_Right	22.01	19.91	20.81
n41	20	30	2506.02	DFT	QPSK	Outer_Full	23.76	21.66	22.56
n41	20	30	2506.02	DFT	16QAM	Inner_Full	24.66	22.56	23.46
n41	20	30	2506.02	DFT	16QAM	Edge_1RB_Left	21.84	19.74	20.64
n41	20	30	2506.02	DFT	16QAM	Edge_1RB_Right	21.84	19.74	20.64
n41	20	30	2506.02	DFT	16QAM	Outer_Full	22.61	20.51	21.41
n41	20	30	2506.02	DFT	64QAM	Inner_Full	23.29	21.19	22.09
n41	20	30	2506.02	DFT	64QAM	Edge_1RB_Left	21.69	19.59	20.49
n41	20	30	2506.02	DFT	64QAM	Edge_1RB_Right	21.73	19.63	20.53
n41	20	30	2506.02	DFT	64QAM	Outer_Full	23.24	21.14	22.04
n41	20	30	2506.02	DFT	256QAM	Inner_Full	21.16	19.06	19.96
n41	20	30	2506.02	DFT	256QAM	Edge_1RB_Left	20.89	18.79	19.69
n41	20	30	2506.02	DFT	256QAM	Edge_1RB_Right	20.95	18.85	19.75
n41	20	30	2506.02	DFT	256QAM	Outer_Full	21.23	19.13	20.03



BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n41	20	30	2506.02	CP	QPSK	Inner_Full	24.24	22.14	23.04
n41	20	30	2506.02	CP	QPSK	Edge_1RB_Left	22.07	19.97	20.87
n41	20	30	2506.02	CP	QPSK	Edge_1RB_Right	22.15	20.05	20.95
n41	20	30	2506.02	CP	QPSK	Outer_Full	21.69	19.59	20.49
n41	20	30	2506.02	CP	16QAM	Inner_Full	23.94	21.84	22.74
n41	20	30	2506.02	CP	16QAM	Edge_1RB_Left	21.84	19.74	20.64
n41	20	30	2506.02	CP	16QAM	Edge_1RB_Right	22.02	19.92	20.82
n41	20	30	2506.02	CP	16QAM	Outer_Full	21.70	19.60	20.50
n41	20	30	2506.02	CP	64QAM	Inner_Full	22.23	20.13	21.03
n41	20	30	2506.02	CP	64QAM	Edge_1RB_Left	21.78	19.68	20.58
n41	20	30	2506.02	CP	64QAM	Edge_1RB_Right	21.92	19.82	20.72
n41	20	30	2506.02	CP	64QAM	Outer_Full	21.09	18.99	19.89
n41	20	30	2506.02	CP	256QAM	Inner_Full	19.21	17.11	18.01
n41	20	30	2506.02	CP	256QAM	Edge_1RB_Left	18.79	16.69	17.59
n41	20	30	2506.02	CP	256QAM	Edge_1RB_Right	18.93	16.83	17.73
n41	20	30	2506.02	CP	256QAM	Outer_Full	19.24	17.14	18.04
n41	20	30	2592.99	DFT	QPSK	Inner_Full	25.69	23.59	24.49
n41	20	30	2592.99	DFT	QPSK	Edge_1RB_Left	21.95	19.85	20.75
n41	20	30	2592.99	DFT	QPSK	Edge_1RB_Right	22.08	19.98	20.88
n41	20	30	2592.99	DFT	QPSK	Outer_Full	23.58	21.48	22.38
n41	20	30	2592.99	DFT	16QAM	Inner_Full	24.65	22.55	23.45
n41	20	30	2592.99	DFT	16QAM	Edge_1RB_Left	21.72	19.62	20.52
n41	20	30	2592.99	DFT	16QAM	Edge_1RB_Right	21.87	19.77	20.67
n41	20	30	2592.99	DFT	16QAM	Outer_Full	22.55	20.45	21.35
n41	20	30	2592.99	DFT	64QAM	Inner_Full	23.16	21.06	21.96
n41	20	30	2592.99	DFT	64QAM	Edge_1RB_Left	21.64	19.54	20.44
n41	20	30	2592.99	DFT	64QAM	Edge_1RB_Right	21.83	19.73	20.63
n41	20	30	2592.99	DFT	64QAM	Outer_Full	23.08	20.98	21.88
n41	20	30	2592.99	DFT	256QAM	Inner_Full	21.07	18.97	19.87
n41	20	30	2592.99	DFT	256QAM	Edge_1RB_Left	20.79	18.69	19.59



BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n41	20	30	2592.99	DFT	256QAM	Edge_1RB_Right	21.01	18.91	19.81
n41	20	30	2592.99	DFT	256QAM	Outer_Full	21.02	18.92	19.82
n41	20	30	2592.99	CP	QPSK	Inner_Full	24.17	22.07	22.97
n41	20	30	2592.99	CP	QPSK	Edge_1RB_Left	21.97	19.87	20.77
n41	20	30	2592.99	CP	QPSK	Edge_1RB_Right	22.22	20.12	21.02
n41	20	30	2592.99	CP	QPSK	Outer_Full	21.64	19.54	20.44
n41	20	30	2592.99	CP	16QAM	Inner_Full	23.76	21.66	22.56
n41	20	30	2592.99	CP	16QAM	Edge_1RB_Left	21.83	19.73	20.63
n41	20	30	2592.99	CP	16QAM	Edge_1RB_Right	22.05	19.95	20.85
n41	20	30	2592.99	CP	16QAM	Outer_Full	21.57	19.47	20.37
n41	20	30	2592.99	CP	64QAM	Inner_Full	22.06	19.96	20.86
n41	20	30	2592.99	CP	64QAM	Edge_1RB_Left	21.67	19.57	20.47
n41	20	30	2592.99	CP	64QAM	Edge_1RB_Right	21.99	19.89	20.79
n41	20	30	2592.99	CP	64QAM	Outer_Full	21.09	18.99	19.89
n41	20	30	2592.99	CP	256QAM	Inner_Full	19.02	16.92	17.82
n41	20	30	2592.99	CP	256QAM	Edge_1RB_Left	18.75	16.65	17.55
n41	20	30	2592.99	CP	256QAM	Edge_1RB_Right	18.99	16.89	17.79
n41	20	30	2592.99	CP	256QAM	Outer_Full	19.11	17.01	17.91
n41	20	30	2679.99	DFT	QPSK	Inner_Full	25.69	23.59	24.49
n41	20	30	2679.99	DFT	QPSK	Edge_1RB_Left	21.92	19.82	20.72
n41	20	30	2679.99	DFT	QPSK	Edge_1RB_Right	22.05	19.95	20.85
n41	20	30	2679.99	DFT	QPSK	Outer_Full	23.65	21.55	22.45
n41	20	30	2679.99	DFT	16QAM	Inner_Full	24.69	22.59	23.49
n41	20	30	2679.99	DFT	16QAM	Edge_1RB_Left	21.79	19.69	20.59
n41	20	30	2679.99	DFT	16QAM	Edge_1RB_Right	21.86	19.76	20.66
n41	20	30	2679.99	DFT	16QAM	Outer_Full	22.62	20.52	21.42
n41	20	30	2679.99	DFT	64QAM	Inner_Full	23.15	21.05	21.95
n41	20	30	2679.99	DFT	64QAM	Edge_1RB_Left	21.54	19.44	20.34
n41	20	30	2679.99	DFT	64QAM	Edge_1RB_Right	21.82	19.72	20.62
n41	20	30	2679.99	DFT	64QAM	Outer_Full	23.10	21.00	21.90



BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n41	20	30	2679.99	DFT	256QAM	Inner_Full	21.09	18.99	19.89
n41	20	30	2679.99	DFT	256QAM	Edge_1RB_Left	20.83	18.73	19.63
n41	20	30	2679.99	DFT	256QAM	Edge_1RB_Right	20.92	18.82	19.72
n41	20	30	2679.99	DFT	256QAM	Outer_Full	21.12	19.02	19.92
n41	20	30	2679.99	CP	QPSK	Inner_Full	24.19	22.09	22.99
n41	20	30	2679.99	CP	QPSK	Edge_1RB_Left	21.97	19.87	20.77
n41	20	30	2679.99	CP	QPSK	Edge_1RB_Right	22.18	20.08	20.98
n41	20	30	2679.99	CP	QPSK	Outer_Full	21.72	19.62	20.52
n41	20	30	2679.99	CP	16QAM	Inner_Full	23.84	21.74	22.64
n41	20	30	2679.99	CP	16QAM	Edge_1RB_Left	21.76	19.66	20.56
n41	20	30	2679.99	CP	16QAM	Edge_1RB_Right	22.05	19.95	20.85
n41	20	30	2679.99	CP	16QAM	Outer_Full	21.66	19.56	20.46
n41	20	30	2679.99	CP	64QAM	Inner_Full	22.20	20.10	21.00
n41	20	30	2679.99	CP	64QAM	Edge_1RB_Left	21.68	19.58	20.48
n41	20	30	2679.99	CP	64QAM	Edge_1RB_Right	21.87	19.77	20.67
n41	20	30	2679.99	CP	64QAM	Outer_Full	21.21	19.11	20.01
n41	20	30	2679.99	CP	256QAM	Inner_Full	19.06	16.96	17.86
n41	20	30	2679.99	CP	256QAM	Edge_1RB_Left	18.63	16.53	17.43
n41	20	30	2679.99	CP	256QAM	Edge_1RB_Right	18.95	16.85	17.75
n41	20	30	2679.99	CP	256QAM	Outer_Full	19.19	17.09	17.99
n41	25	30	2508.51	DFT	QPSK	Inner_Full	25.76	23.66	24.56
n41	25	30	2508.51	DFT	QPSK	Edge_1RB_Left	22.18	20.08	20.98
n41	25	30	2508.51	DFT	QPSK	Edge_1RB_Right	22.16	20.06	20.96
n41	25	30	2508.51	DFT	QPSK	Outer_Full	23.76	21.66	22.56
n41	25	30	2508.51	DFT	16QAM	Inner_Full	24.76	22.66	23.56
n41	25	30	2508.51	DFT	16QAM	Edge_1RB_Left	21.90	19.80	20.70
n41	25	30	2508.51	DFT	16QAM	Edge_1RB_Right	21.98	19.88	20.78
n41	25	30	2508.51	DFT	16QAM	Outer_Full	22.78	20.68	21.58
n41	25	30	2508.51	DFT	64QAM	Inner_Full	23.19	21.09	21.99
n41	25	30	2508.51	DFT	64QAM	Edge_1RB_Left	21.81	19.71	20.61



BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n41	25	30	2508.51	DFT	64QAM	Edge_1RB_Right	21.89	19.79	20.69
n41	25	30	2508.51	DFT	64QAM	Outer_Full	23.16	21.06	21.96
n41	25	30	2508.51	DFT	256QAM	Inner_Full	21.12	19.02	19.92
n41	25	30	2508.51	DFT	256QAM	Edge_1RB_Left	21.09	18.99	19.89
n41	25	30	2508.51	DFT	256QAM	Edge_1RB_Right	21.08	18.98	19.88
n41	25	30	2508.51	DFT	256QAM	Outer_Full	21.25	19.15	20.05
n41	25	30	2508.51	CP	QPSK	Inner_Full	24.33	22.23	23.13
n41	25	30	2508.51	CP	QPSK	Edge_1RB_Left	22.21	20.11	21.01
n41	25	30	2508.51	CP	QPSK	Edge_1RB_Right	22.24	20.14	21.04
n41	25	30	2508.51	CP	QPSK	Outer_Full	21.88	19.78	20.68
n41	25	30	2508.51	CP	16QAM	Inner_Full	23.84	21.74	22.64
n41	25	30	2508.51	CP	16QAM	Edge_1RB_Left	22.00	19.90	20.80
n41	25	30	2508.51	CP	16QAM	Edge_1RB_Right	22.11	20.01	20.91
n41	25	30	2508.51	CP	16QAM	Outer_Full	21.67	19.57	20.47
n41	25	30	2508.51	CP	64QAM	Inner_Full	22.30	20.20	21.10
n41	25	30	2508.51	CP	64QAM	Edge_1RB_Left	21.92	19.82	20.72
n41	25	30	2508.51	CP	64QAM	Edge_1RB_Right	22.00	19.90	20.80
n41	25	30	2508.51	CP	64QAM	Outer_Full	21.14	19.04	19.94
n41	25	30	2508.51	CP	256QAM	Inner_Full	19.22	17.12	18.02
n41	25	30	2508.51	CP	256QAM	Edge_1RB_Left	18.98	16.88	17.78
n41	25	30	2508.51	CP	256QAM	Edge_1RB_Right	18.99	16.89	17.79
n41	25	30	2508.51	CP	256QAM	Outer_Full	19.24	17.14	18.04
n41	25	30	2592.99	DFT	QPSK	Inner_Full	25.88	23.78	24.68
n41	25	30	2592.99	DFT	QPSK	Edge_1RB_Left	22.19	20.09	20.99
n41	25	30	2592.99	DFT	QPSK	Edge_1RB_Right	22.41	20.31	21.21
n41	25	30	2592.99	DFT	QPSK	Outer_Full	23.79	21.69	22.59
n41	25	30	2592.99	DFT	16QAM	Inner_Full	24.74	22.64	23.54
n41	25	30	2592.99	DFT	16QAM	Edge_1RB_Left	22.05	19.95	20.85
n41	25	30	2592.99	DFT	16QAM	Edge_1RB_Right	22.11	20.01	20.91
n41	25	30	2592.99	DFT	16QAM	Outer_Full	22.81	20.71	21.61



BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n41	25	30	2592.99	DFT	64QAM	Inner_Full	23.23	21.13	22.03
n41	25	30	2592.99	DFT	64QAM	Edge_1RB_Left	21.81	19.71	20.61
n41	25	30	2592.99	DFT	64QAM	Edge_1RB_Right	22.04	19.94	20.84
n41	25	30	2592.99	DFT	64QAM	Outer_Full	23.27	21.17	22.07
n41	25	30	2592.99	DFT	256QAM	Inner_Full	21.11	19.01	19.91
n41	25	30	2592.99	DFT	256QAM	Edge_1RB_Left	21.03	18.93	19.83
n41	25	30	2592.99	DFT	256QAM	Edge_1RB_Right	21.28	19.18	20.08
n41	25	30	2592.99	DFT	256QAM	Outer_Full	21.28	19.18	20.08
n41	25	30	2592.99	CP	QPSK	Inner_Full	24.42	22.32	23.22
n41	25	30	2592.99	CP	QPSK	Edge_1RB_Left	22.23	20.13	21.03
n41	25	30	2592.99	CP	QPSK	Edge_1RB_Right	22.45	20.35	21.25
n41	25	30	2592.99	CP	QPSK	Outer_Full	21.85	19.75	20.65
n41	25	30	2592.99	CP	16QAM	Inner_Full	23.82	21.72	22.62
n41	25	30	2592.99	CP	16QAM	Edge_1RB_Left	22.14	20.04	20.94
n41	25	30	2592.99	CP	16QAM	Edge_1RB_Right	22.28	20.18	21.08
n41	25	30	2592.99	CP	16QAM	Outer_Full	21.74	19.64	20.54
n41	25	30	2592.99	CP	64QAM	Inner_Full	22.24	20.14	21.04
n41	25	30	2592.99	CP	64QAM	Edge_1RB_Left	21.91	19.81	20.71
n41	25	30	2592.99	CP	64QAM	Edge_1RB_Right	22.04	19.94	20.84
n41	25	30	2592.99	CP	64QAM	Outer_Full	21.33	19.23	20.13
n41	25	30	2592.99	CP	256QAM	Inner_Full	19.21	17.11	18.01
n41	25	30	2592.99	CP	256QAM	Edge_1RB_Left	19.03	16.93	17.83
n41	25	30	2592.99	CP	256QAM	Edge_1RB_Right	19.16	17.06	17.96
n41	25	30	2592.99	CP	256QAM	Outer_Full	19.27	17.17	18.07
n41	25	30	2677.5	DFT	QPSK	Inner_Full	25.79	23.69	24.59
n41	25	30	2677.5	DFT	QPSK	Edge_1RB_Left	22.05	19.95	20.85
n41	25	30	2677.5	DFT	QPSK	Edge_1RB_Right	22.27	20.17	21.07
n41	25	30	2677.5	DFT	QPSK	Outer_Full	23.65	21.55	22.45
n41	25	30	2677.5	DFT	16QAM	Inner_Full	24.64	22.54	23.44
n41	25	30	2677.5	DFT	16QAM	Edge_1RB_Left	21.80	19.70	20.60



BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n41	25	30	2677.5	DFT	16QAM	Edge_1RB_Right	22.06	19.96	20.86
n41	25	30	2677.5	DFT	16QAM	Outer_Full	22.72	20.62	21.52
n41	25	30	2677.5	DFT	64QAM	Inner_Full	23.16	21.06	21.96
n41	25	30	2677.5	DFT	64QAM	Edge_1RB_Left	21.75	19.65	20.55
n41	25	30	2677.5	DFT	64QAM	Edge_1RB_Right	22.01	19.91	20.81
n41	25	30	2677.5	DFT	64QAM	Outer_Full	23.20	21.10	22.00
n41	25	30	2677.5	DFT	256QAM	Inner_Full	21.13	19.03	19.93
n41	25	30	2677.5	DFT	256QAM	Edge_1RB_Left	20.93	18.83	19.73
n41	25	30	2677.5	DFT	256QAM	Edge_1RB_Right	21.14	19.04	19.94
n41	25	30	2677.5	DFT	256QAM	Outer_Full	21.19	19.09	19.99
n41	25	30	2677.5	CP	QPSK	Inner_Full	24.33	22.23	23.13
n41	25	30	2677.5	CP	QPSK	Edge_1RB_Left	22.11	20.01	20.91
n41	25	30	2677.5	CP	QPSK	Edge_1RB_Right	22.36	20.26	21.16
n41	25	30	2677.5	CP	QPSK	Outer_Full	21.71	19.61	20.51
n41	25	30	2677.5	CP	16QAM	Inner_Full	23.71	21.61	22.51
n41	25	30	2677.5	CP	16QAM	Edge_1RB_Left	21.91	19.81	20.71
n41	25	30	2677.5	CP	16QAM	Edge_1RB_Right	22.18	20.08	20.98
n41	25	30	2677.5	CP	16QAM	Outer_Full	21.64	19.54	20.44
n41	25	30	2677.5	CP	64QAM	Inner_Full	22.25	20.15	21.05
n41	25	30	2677.5	CP	64QAM	Edge_1RB_Left	21.89	19.79	20.69
n41	25	30	2677.5	CP	64QAM	Edge_1RB_Right	22.06	19.96	20.86
n41	25	30	2677.5	CP	64QAM	Outer_Full	21.21	19.11	20.01
n41	25	30	2677.5	CP	256QAM	Inner_Full	19.16	17.06	17.96
n41	25	30	2677.5	CP	256QAM	Edge_1RB_Left	18.82	16.72	17.62
n41	25	30	2677.5	CP	256QAM	Edge_1RB_Right	19.10	17.00	17.90
n41	25	30	2677.5	CP	256QAM	Outer_Full	19.14	17.04	17.94
n41	30	30	2511	DFT	QPSK	Inner_Full	25.82	23.72	24.62
n41	30	30	2511	DFT	QPSK	Edge_1RB_Left	22.20	20.10	21.00
n41	30	30	2511	DFT	QPSK	Edge_1RB_Right	22.13	20.03	20.93
n41	30	30	2511	DFT	QPSK	Outer_Full	23.81	21.71	22.61



BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n41	30	30	2511	DFT	16QAM	Inner_Full	24.71	22.61	23.51
n41	30	30	2511	DFT	16QAM	Edge_1RB_Left	21.99	19.89	20.79
n41	30	30	2511	DFT	16QAM	Edge_1RB_Right	21.94	19.84	20.74
n41	30	30	2511	DFT	16QAM	Outer_Full	22.68	20.58	21.48
n41	30	30	2511	DFT	64QAM	Inner_Full	23.32	21.22	22.12
n41	30	30	2511	DFT	64QAM	Edge_1RB_Left	21.83	19.73	20.63
n41	30	30	2511	DFT	64QAM	Edge_1RB_Right	21.85	19.75	20.65
n41	30	30	2511	DFT	64QAM	Outer_Full	23.17	21.07	21.97
n41	30	30	2511	DFT	256QAM	Inner_Full	21.27	19.17	20.07
n41	30	30	2511	DFT	256QAM	Edge_1RB_Left	21.05	18.95	19.85
n41	30	30	2511	DFT	256QAM	Edge_1RB_Right	21.06	18.96	19.86
n41	30	30	2511	DFT	256QAM	Outer_Full	21.27	19.17	20.07
n41	30	30	2511	CP	QPSK	Inner_Full	24.31	22.21	23.11
n41	30	30	2511	CP	QPSK	Edge_1RB_Left	22.22	20.12	21.02
n41	30	30	2511	CP	QPSK	Edge_1RB_Right	22.23	20.13	21.03
n41	30	30	2511	CP	QPSK	Outer_Full	21.72	19.62	20.52
n41	30	30	2511	CP	16QAM	Inner_Full	23.88	21.78	22.68
n41	30	30	2511	CP	16QAM	Edge_1RB_Left	22.01	19.91	20.81
n41	30	30	2511	CP	16QAM	Edge_1RB_Right	22.08	19.98	20.88
n41	30	30	2511	CP	16QAM	Outer_Full	21.72	19.62	20.52
n41	30	30	2511	CP	64QAM	Inner_Full	22.31	20.21	21.11
n41	30	30	2511	CP	64QAM	Edge_1RB_Left	21.90	19.80	20.70
n41	30	30	2511	CP	64QAM	Edge_1RB_Right	21.98	19.88	20.78
n41	30	30	2511	CP	64QAM	Outer_Full	21.14	19.04	19.94
n41	30	30	2511	CP	256QAM	Inner_Full	19.32	17.22	18.12
n41	30	30	2511	CP	256QAM	Edge_1RB_Left	18.89	16.79	17.69
n41	30	30	2511	CP	256QAM	Edge_1RB_Right	18.99	16.89	17.79
n41	30	30	2511	CP	256QAM	Outer_Full	19.30	17.20	18.10
n41	30	30	2592.99	DFT	QPSK	Inner_Full	25.77	23.67	24.57
n41	30	30	2592.99	DFT	QPSK	Edge_1RB_Left	22.06	19.96	20.86



BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n41	30	30	2592.99	DFT	QPSK	Edge_1RB_Right	22.46	20.36	21.26
n41	30	30	2592.99	DFT	QPSK	Outer_Full	23.78	21.68	22.58
n41	30	30	2592.99	DFT	16QAM	Inner_Full	24.69	22.59	23.49
n41	30	30	2592.99	DFT	16QAM	Edge_1RB_Left	21.93	19.83	20.73
n41	30	30	2592.99	DFT	16QAM	Edge_1RB_Right	22.27	20.17	21.07
n41	30	30	2592.99	DFT	16QAM	Outer_Full	22.87	20.77	21.67
n41	30	30	2592.99	DFT	64QAM	Inner_Full	23.31	21.21	22.11
n41	30	30	2592.99	DFT	64QAM	Edge_1RB_Left	21.77	19.67	20.57
n41	30	30	2592.99	DFT	64QAM	Edge_1RB_Right	22.03	19.93	20.83
n41	30	30	2592.99	DFT	64QAM	Outer_Full	23.30	21.20	22.10
n41	30	30	2592.99	DFT	256QAM	Inner_Full	21.18	19.08	19.98
n41	30	30	2592.99	DFT	256QAM	Edge_1RB_Left	21.00	18.90	19.80
n41	30	30	2592.99	DFT	256QAM	Edge_1RB_Right	21.32	19.22	20.12
n41	30	30	2592.99	DFT	256QAM	Outer_Full	21.27	19.17	20.07
n41	30	30	2592.99	CP	QPSK	Inner_Full	24.24	22.14	23.04
n41	30	30	2592.99	CP	QPSK	Edge_1RB_Left	22.25	20.15	21.05
n41	30	30	2592.99	CP	QPSK	Edge_1RB_Right	22.39	20.29	21.19
n41	30	30	2592.99	CP	QPSK	Outer_Full	21.80	19.70	20.60
n41	30	30	2592.99	CP	16QAM	Inner_Full	23.84	21.74	22.64
n41	30	30	2592.99	CP	16QAM	Edge_1RB_Left	22.05	19.95	20.85
n41	30	30	2592.99	CP	16QAM	Edge_1RB_Right	22.24	20.14	21.04
n41	30	30	2592.99	CP	16QAM	Outer_Full	21.79	19.69	20.59
n41	30	30	2592.99	CP	64QAM	Inner_Full	22.27	20.17	21.07
n41	30	30	2592.99	CP	64QAM	Edge_1RB_Left	21.87	19.77	20.67
n41	30	30	2592.99	CP	64QAM	Edge_1RB_Right	22.08	19.98	20.88
n41	30	30	2592.99	CP	64QAM	Outer_Full	21.31	19.21	20.11
n41	30	30	2592.99	CP	256QAM	Inner_Full	19.25	17.15	18.05
n41	30	30	2592.99	CP	256QAM	Edge_1RB_Left	18.90	16.80	17.70
n41	30	30	2592.99	CP	256QAM	Edge_1RB_Right	19.17	17.07	17.97
n41	30	30	2592.99	CP	256QAM	Outer_Full	19.30	17.20	18.10



BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n41	30	30	2674.98	DFT	QPSK	Inner_Full	25.77	23.67	24.57
n41	30	30	2674.98	DFT	QPSK	Edge_1RB_Left	21.95	19.85	20.75
n41	30	30	2674.98	DFT	QPSK	Edge_1RB_Right	22.28	20.18	21.08
n41	30	30	2674.98	DFT	QPSK	Outer_Full	23.68	21.58	22.48
n41	30	30	2674.98	DFT	16QAM	Inner_Full	24.64	22.54	23.44
n41	30	30	2674.98	DFT	16QAM	Edge_1RB_Left	21.79	19.69	20.59
n41	30	30	2674.98	DFT	16QAM	Edge_1RB_Right	21.95	19.85	20.75
n41	30	30	2674.98	DFT	16QAM	Outer_Full	22.69	20.59	21.49
n41	30	30	2674.98	DFT	64QAM	Inner_Full	23.18	21.08	21.98
n41	30	30	2674.98	DFT	64QAM	Edge_1RB_Left	21.69	19.59	20.49
n41	30	30	2674.98	DFT	64QAM	Edge_1RB_Right	21.88	19.78	20.68
n41	30	30	2674.98	DFT	64QAM	Outer_Full	23.20	21.10	22.00
n41	30	30	2674.98	DFT	256QAM	Inner_Full	21.24	19.14	20.04
n41	30	30	2674.98	DFT	256QAM	Edge_1RB_Left	20.88	18.78	19.68
n41	30	30	2674.98	DFT	256QAM	Edge_1RB_Right	21.17	19.07	19.97
n41	30	30	2674.98	DFT	256QAM	Outer_Full	21.18	19.08	19.98
n41	30	30	2674.98	CP	QPSK	Inner_Full	24.31	22.21	23.11
n41	30	30	2674.98	CP	QPSK	Edge_1RB_Left	22.04	19.94	20.84
n41	30	30	2674.98	CP	QPSK	Edge_1RB_Right	22.37	20.27	21.17
n41	30	30	2674.98	CP	QPSK	Outer_Full	21.74	19.64	20.54
n41	30	30	2674.98	CP	16QAM	Inner_Full	23.72	21.62	22.52
n41	30	30	2674.98	CP	16QAM	Edge_1RB_Left	21.93	19.83	20.73
n41	30	30	2674.98	CP	16QAM	Edge_1RB_Right	22.10	20.00	20.90
n41	30	30	2674.98	CP	16QAM	Outer_Full	21.69	19.59	20.49
n41	30	30	2674.98	CP	64QAM	Inner_Full	22.19	20.09	20.99
n41	30	30	2674.98	CP	64QAM	Edge_1RB_Left	21.81	19.71	20.61
n41	30	30	2674.98	CP	64QAM	Edge_1RB_Right	21.93	19.83	20.73
n41	30	30	2674.98	CP	64QAM	Outer_Full	21.17	19.07	19.97
n41	30	30	2674.98	CP	256QAM	Inner_Full	19.20	17.10	18.00
n41	30	30	2674.98	CP	256QAM	Edge_1RB_Left	18.81	16.71	17.61



BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n41	30	30	2674.98	CP	256QAM	Edge_1RB_Right	19.06	16.96	17.86
n41	30	30	2674.98	CP	256QAM	Outer_Full	19.17	17.07	17.97
n41	35	30	2513.52	DFT	QPSK	Inner_Full	23.69	21.59	22.49
n41	35	30	2513.52	DFT	QPSK	Edge_1RB_Left	23.73	21.63	22.53
n41	35	30	2513.52	DFT	QPSK	Edge_1RB_Right	23.79	21.69	22.59
n41	35	30	2513.52	DFT	QPSK	Outer_Full	23.78	21.68	22.58
n41	35	30	2513.52	DFT	16QAM	Inner_Full	22.74	20.64	21.54
n41	35	30	2513.52	DFT	16QAM	Edge_1RB_Left	22.74	20.64	21.54
n41	35	30	2513.52	DFT	16QAM	Edge_1RB_Right	22.75	20.65	21.55
n41	35	30	2513.52	DFT	16QAM	Outer_Full	22.63	20.53	21.43
n41	35	30	2513.52	DFT	64QAM	Inner_Full	23.27	21.17	22.07
n41	35	30	2513.52	DFT	64QAM	Edge_1RB_Left	23.16	21.06	21.96
n41	35	30	2513.52	DFT	64QAM	Edge_1RB_Right	23.17	21.07	21.97
n41	35	30	2513.52	DFT	64QAM	Outer_Full	23.26	21.16	22.06
n41	35	30	2513.52	DFT	256QAM	Inner_Full	21.21	19.11	20.01
n41	35	30	2513.52	DFT	256QAM	Edge_1RB_Left	21.25	19.15	20.05
n41	35	30	2513.52	DFT	256QAM	Edge_1RB_Right	21.25	19.15	20.05
n41	35	30	2513.52	DFT	256QAM	Outer_Full	21.27	19.17	20.07
n41	35	30	2513.52	CP	QPSK	Inner_Full	21.73	19.63	20.53
n41	35	30	2513.52	CP	QPSK	Edge_1RB_Left	21.76	19.66	20.56
n41	35	30	2513.52	CP	QPSK	Edge_1RB_Right	21.74	19.64	20.54
n41	35	30	2513.52	CP	QPSK	Outer_Full	21.79	19.69	20.59
n41	35	30	2513.52	CP	16QAM	Inner_Full	21.76	19.66	20.56
n41	35	30	2513.52	CP	16QAM	Edge_1RB_Left	21.83	19.73	20.63
n41	35	30	2513.52	CP	16QAM	Edge_1RB_Right	21.78	19.68	20.58
n41	35	30	2513.52	CP	16QAM	Outer_Full	21.82	19.72	20.62
n41	35	30	2513.52	CP	64QAM	Inner_Full	21.25	19.15	20.05
n41	35	30	2513.52	CP	64QAM	Edge_1RB_Left	21.29	19.19	20.09
n41	35	30	2513.52	CP	64QAM	Edge_1RB_Right	21.20	19.10	20.00
n41	35	30	2513.52	CP	64QAM	Outer_Full	21.29	19.19	20.09



BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n41	35	30	2513.52	CP	256QAM	Inner_Full	19.32	17.22	18.12
n41	35	30	2513.52	CP	256QAM	Edge_1RB_Left	19.33	17.23	18.13
n41	35	30	2513.52	CP	256QAM	Edge_1RB_Right	19.24	17.14	18.04
n41	35	30	2513.52	CP	256QAM	Outer_Full	19.33	17.23	18.13
n41	35	30	2592.99	DFT	QPSK	Inner_Full	23.87	21.77	22.67
n41	35	30	2592.99	DFT	QPSK	Edge_1RB_Left	23.74	21.64	22.54
n41	35	30	2592.99	DFT	QPSK	Edge_1RB_Right	23.78	21.68	22.58
n41	35	30	2592.99	DFT	QPSK	Outer_Full	23.81	21.71	22.61
n41	35	30	2592.99	DFT	16QAM	Inner_Full	22.79	20.69	21.59
n41	35	30	2592.99	DFT	16QAM	Edge_1RB_Left	22.79	20.69	21.59
n41	35	30	2592.99	DFT	16QAM	Edge_1RB_Right	22.79	20.69	21.59
n41	35	30	2592.99	DFT	16QAM	Outer_Full	22.77	20.67	21.57
n41	35	30	2592.99	DFT	64QAM	Inner_Full	23.32	21.22	22.12
n41	35	30	2592.99	DFT	64QAM	Edge_1RB_Left	23.32	21.22	22.12
n41	35	30	2592.99	DFT	64QAM	Edge_1RB_Right	23.36	21.26	22.16
n41	35	30	2592.99	DFT	64QAM	Outer_Full	23.29	21.19	22.09
n41	35	30	2592.99	DFT	256QAM	Inner_Full	21.28	19.18	20.08
n41	35	30	2592.99	DFT	256QAM	Edge_1RB_Left	21.30	19.20	20.10
n41	35	30	2592.99	DFT	256QAM	Edge_1RB_Right	21.29	19.19	20.09
n41	35	30	2592.99	DFT	256QAM	Outer_Full	21.29	19.19	20.09
n41	35	30	2592.99	CP	QPSK	Inner_Full	21.69	19.59	20.49
n41	35	30	2592.99	CP	QPSK	Edge_1RB_Left	21.72	19.62	20.52
n41	35	30	2592.99	CP	QPSK	Edge_1RB_Right	21.70	19.60	20.50
n41	35	30	2592.99	CP	QPSK	Outer_Full	21.76	19.66	20.56
n41	35	30	2592.99	CP	16QAM	Inner_Full	21.73	19.63	20.53
n41	35	30	2592.99	CP	16QAM	Edge_1RB_Left	21.76	19.66	20.56
n41	35	30	2592.99	CP	16QAM	Edge_1RB_Right	21.76	19.66	20.56
n41	35	30	2592.99	CP	16QAM	Outer_Full	21.79	19.69	20.59
n41	35	30	2592.99	CP	64QAM	Inner_Full	21.32	19.22	20.12
n41	35	30	2592.99	CP	64QAM	Edge_1RB_Left	21.32	19.22	20.12



BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n41	35	30	2592.99	CP	64QAM	Edge_1RB_Right	21.33	19.23	20.13
n41	35	30	2592.99	CP	64QAM	Outer_Full	21.31	19.21	20.11
n41	35	30	2592.99	CP	256QAM	Inner_Full	19.30	17.20	18.10
n41	35	30	2592.99	CP	256QAM	Edge_1RB_Left	19.30	17.20	18.10
n41	35	30	2592.99	CP	256QAM	Edge_1RB_Right	19.31	17.21	18.11
n41	35	30	2592.99	CP	256QAM	Outer_Full	19.31	17.21	18.11
n41	35	30	2672.49	DFT	QPSK	Inner_Full	23.75	21.65	22.55
n41	35	30	2672.49	DFT	QPSK	Edge_1RB_Left	23.72	21.62	22.52
n41	35	30	2672.49	DFT	QPSK	Edge_1RB_Right	23.69	21.59	22.49
n41	35	30	2672.49	DFT	QPSK	Outer_Full	23.74	21.64	22.54
n41	35	30	2672.49	DFT	16QAM	Inner_Full	22.74	20.64	21.54
n41	35	30	2672.49	DFT	16QAM	Edge_1RB_Left	22.77	20.67	21.57
n41	35	30	2672.49	DFT	16QAM	Edge_1RB_Right	22.72	20.62	21.52
n41	35	30	2672.49	DFT	16QAM	Outer_Full	22.76	20.66	21.56
n41	35	30	2672.49	DFT	64QAM	Inner_Full	23.23	21.13	22.03
n41	35	30	2672.49	DFT	64QAM	Edge_1RB_Left	23.22	21.12	22.02
n41	35	30	2672.49	DFT	64QAM	Edge_1RB_Right	23.21	21.11	22.01
n41	35	30	2672.49	DFT	64QAM	Outer_Full	23.22	21.12	22.02
n41	35	30	2672.49	DFT	256QAM	Inner_Full	21.26	19.16	20.06
n41	35	30	2672.49	DFT	256QAM	Edge_1RB_Left	21.23	19.13	20.03
n41	35	30	2672.49	DFT	256QAM	Edge_1RB_Right	21.21	19.11	20.01
n41	35	30	2672.49	DFT	256QAM	Outer_Full	21.25	19.15	20.05
n41	35	30	2672.49	CP	QPSK	Inner_Full	21.71	19.61	20.51
n41	35	30	2672.49	CP	QPSK	Edge_1RB_Left	21.63	19.53	20.43
n41	35	30	2672.49	CP	QPSK	Edge_1RB_Right	21.64	19.54	20.44
n41	35	30	2672.49	CP	QPSK	Outer_Full	21.69	19.59	20.49
n41	35	30	2672.49	CP	16QAM	Inner_Full	21.69	19.59	20.49
n41	35	30	2672.49	CP	16QAM	Edge_1RB_Left	21.65	19.55	20.45
n41	35	30	2672.49	CP	16QAM	Edge_1RB_Right	21.69	19.59	20.49
n41	35	30	2672.49	CP	16QAM	Outer_Full	21.65	19.55	20.45



BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n41	35	30	2672.49	CP	64QAM	Inner_Full	21.23	19.13	20.03
n41	35	30	2672.49	CP	64QAM	Edge_1RB_Left	21.23	19.13	20.03
n41	35	30	2672.49	CP	64QAM	Edge_1RB_Right	21.23	19.13	20.03
n41	35	30	2672.49	CP	64QAM	Outer_Full	21.21	19.11	20.01
n41	35	30	2672.49	CP	256QAM	Inner_Full	19.20	17.10	18.00
n41	35	30	2672.49	CP	256QAM	Edge_1RB_Left	19.16	17.06	17.96
n41	35	30	2672.49	CP	256QAM	Edge_1RB_Right	19.23	17.13	18.03
n41	35	30	2672.49	CP	256QAM	Outer_Full	19.20	17.10	18.00
n41	40	30	2516.01	DFT	QPSK	Inner_Full	25.89	23.79	24.69
n41	40	30	2516.01	DFT	QPSK	Edge_1RB_Left	22.07	19.97	20.87
n41	40	30	2516.01	DFT	QPSK	Edge_1RB_Right	22.09	19.99	20.89
n41	40	30	2516.01	DFT	QPSK	Outer_Full	23.83	21.73	22.63
n41	40	30	2516.01	DFT	16QAM	Inner_Full	24.77	22.67	23.57
n41	40	30	2516.01	DFT	16QAM	Edge_1RB_Left	21.77	19.67	20.57
n41	40	30	2516.01	DFT	16QAM	Edge_1RB_Right	21.92	19.82	20.72
n41	40	30	2516.01	DFT	16QAM	Outer_Full	22.81	20.71	21.61
n41	40	30	2516.01	DFT	64QAM	Inner_Full	23.24	21.14	22.04
n41	40	30	2516.01	DFT	64QAM	Edge_1RB_Left	21.74	19.64	20.54
n41	40	30	2516.01	DFT	64QAM	Edge_1RB_Right	21.81	19.71	20.61
n41	40	30	2516.01	DFT	64QAM	Outer_Full	23.29	21.19	22.09
n41	40	30	2516.01	DFT	256QAM	Inner_Full	21.18	19.08	19.98
n41	40	30	2516.01	DFT	256QAM	Edge_1RB_Left	20.86	18.76	19.66
n41	40	30	2516.01	DFT	256QAM	Edge_1RB_Right	21.00	18.90	19.80
n41	40	30	2516.01	DFT	256QAM	Outer_Full	21.30	19.20	20.10
n41	40	30	2516.01	CP	QPSK	Inner_Full	24.31	22.21	23.11
n41	40	30	2516.01	CP	QPSK	Edge_1RB_Left	22.03	19.93	20.83
n41	40	30	2516.01	CP	QPSK	Edge_1RB_Right	22.12	20.02	20.92
n41	40	30	2516.01	CP	QPSK	Outer_Full	21.81	19.71	20.61
n41	40	30	2516.01	CP	16QAM	Inner_Full	23.81	21.71	22.61
n41	40	30	2516.01	CP	16QAM	Edge_1RB_Left	21.94	19.84	20.74



BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n41	40	30	2516.01	CP	16QAM	Edge_1RB_Right	22.02	19.92	20.82
n41	40	30	2516.01	CP	16QAM	Outer_Full	21.68	19.58	20.48
n41	40	30	2516.01	CP	64QAM	Inner_Full	22.29	20.19	21.09
n41	40	30	2516.01	CP	64QAM	Edge_1RB_Left	21.82	19.72	20.62
n41	40	30	2516.01	CP	64QAM	Edge_1RB_Right	21.94	19.84	20.74
n41	40	30	2516.01	CP	64QAM	Outer_Full	21.23	19.13	20.03
n41	40	30	2516.01	CP	256QAM	Inner_Full	19.28	17.18	18.08
n41	40	30	2516.01	CP	256QAM	Edge_1RB_Left	18.76	16.66	17.56
n41	40	30	2516.01	CP	256QAM	Edge_1RB_Right	18.92	16.82	17.72
n41	40	30	2516.01	CP	256QAM	Outer_Full	19.22	17.12	18.02
n41	40	30	2592.99	DFT	QPSK	Inner_Full	25.80	23.70	24.60
n41	40	30	2592.99	DFT	QPSK	Edge_1RB_Left	22.00	19.90	20.80
n41	40	30	2592.99	DFT	QPSK	Edge_1RB_Right	22.43	20.33	21.23
n41	40	30	2592.99	DFT	QPSK	Outer_Full	23.92	21.82	22.72
n41	40	30	2592.99	DFT	16QAM	Inner_Full	24.74	22.64	23.54
n41	40	30	2592.99	DFT	16QAM	Edge_1RB_Left	21.81	19.71	20.61
n41	40	30	2592.99	DFT	16QAM	Edge_1RB_Right	22.25	20.15	21.05
n41	40	30	2592.99	DFT	16QAM	Outer_Full	22.80	20.70	21.60
n41	40	30	2592.99	DFT	64QAM	Inner_Full	23.29	21.19	22.09
n41	40	30	2592.99	DFT	64QAM	Edge_1RB_Left	21.72	19.62	20.52
n41	40	30	2592.99	DFT	64QAM	Edge_1RB_Right	22.03	19.93	20.83
n41	40	30	2592.99	DFT	64QAM	Outer_Full	23.33	21.23	22.13
n41	40	30	2592.99	DFT	256QAM	Inner_Full	21.19	19.09	19.99
n41	40	30	2592.99	DFT	256QAM	Edge_1RB_Left	20.85	18.75	19.65
n41	40	30	2592.99	DFT	256QAM	Edge_1RB_Right	21.31	19.21	20.11
n41	40	30	2592.99	DFT	256QAM	Outer_Full	21.30	19.20	20.10
n41	40	30	2592.99	CP	QPSK	Inner_Full	24.32	22.22	23.12
n41	40	30	2592.99	CP	QPSK	Edge_1RB_Left	22.04	19.94	20.84
n41	40	30	2592.99	CP	QPSK	Edge_1RB_Right	22.40	20.30	21.20
n41	40	30	2592.99	CP	QPSK	Outer_Full	21.82	19.72	20.62



BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n41	40	30	2592.99	CP	16QAM	Inner_Full	23.84	21.74	22.64
n41	40	30	2592.99	CP	16QAM	Edge_1RB_Left	21.94	19.84	20.74
n41	40	30	2592.99	CP	16QAM	Edge_1RB_Right	22.36	20.26	21.16
n41	40	30	2592.99	CP	16QAM	Outer_Full	21.77	19.67	20.57
n41	40	30	2592.99	CP	64QAM	Inner_Full	22.31	20.21	21.11
n41	40	30	2592.99	CP	64QAM	Edge_1RB_Left	21.74	19.64	20.54
n41	40	30	2592.99	CP	64QAM	Edge_1RB_Right	22.23	20.13	21.03
n41	40	30	2592.99	CP	64QAM	Outer_Full	21.35	19.25	20.15
n41	40	30	2592.99	CP	256QAM	Inner_Full	19.28	17.18	18.08
n41	40	30	2592.99	CP	256QAM	Edge_1RB_Left	18.83	16.73	17.63
n41	40	30	2592.99	CP	256QAM	Edge_1RB_Right	19.25	17.15	18.05
n41	40	30	2592.99	CP	256QAM	Outer_Full	19.32	17.22	18.12
n41	40	30	2670	DFT	QPSK	Inner_Full	25.85	23.75	24.65
n41	40	30	2670	DFT	QPSK	Edge_1RB_Left	21.99	19.89	20.79
n41	40	30	2670	DFT	QPSK	Edge_1RB_Right	22.33	20.23	21.13
n41	40	30	2670	DFT	QPSK	Outer_Full	23.85	21.75	22.65
n41	40	30	2670	DFT	16QAM	Inner_Full	24.67	22.57	23.47
n41	40	30	2670	DFT	16QAM	Edge_1RB_Left	21.85	19.75	20.65
n41	40	30	2670	DFT	16QAM	Edge_1RB_Right	22.04	19.94	20.84
n41	40	30	2670	DFT	16QAM	Outer_Full	22.71	20.61	21.51
n41	40	30	2670	DFT	64QAM	Inner_Full	23.25	21.15	22.05
n41	40	30	2670	DFT	64QAM	Edge_1RB_Left	21.70	19.60	20.50
n41	40	30	2670	DFT	64QAM	Edge_1RB_Right	21.93	19.83	20.73
n41	40	30	2670	DFT	64QAM	Outer_Full	23.29	21.19	22.09
n41	40	30	2670	DFT	256QAM	Inner_Full	21.17	19.07	19.97
n41	40	30	2670	DFT	256QAM	Edge_1RB_Left	20.83	18.73	19.63
n41	40	30	2670	DFT	256QAM	Edge_1RB_Right	21.21	19.11	20.01
n41	40	30	2670	DFT	256QAM	Outer_Full	21.28	19.18	20.08
n41	40	30	2670	CP	QPSK	Inner_Full	24.31	22.21	23.11
n41	40	30	2670	CP	QPSK	Edge_1RB_Left	21.97	19.87	20.77



BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n41	40	30	2670	CP	QPSK	Edge_1RB_Right	22.39	20.29	21.19
n41	40	30	2670	CP	QPSK	Outer_Full	21.78	19.68	20.58
n41	40	30	2670	CP	16QAM	Inner_Full	23.83	21.73	22.63
n41	40	30	2670	CP	16QAM	Edge_1RB_Left	21.92	19.82	20.72
n41	40	30	2670	CP	16QAM	Edge_1RB_Right	22.12	20.02	20.92
n41	40	30	2670	CP	16QAM	Outer_Full	21.75	19.65	20.55
n41	40	30	2670	CP	64QAM	Inner_Full	22.31	20.21	21.11
n41	40	30	2670	CP	64QAM	Edge_1RB_Left	21.73	19.63	20.53
n41	40	30	2670	CP	64QAM	Edge_1RB_Right	22.00	19.90	20.80
n41	40	30	2670	CP	64QAM	Outer_Full	21.24	19.14	20.04
n41	40	30	2670	CP	256QAM	Inner_Full	19.30	17.20	18.10
n41	40	30	2670	CP	256QAM	Edge_1RB_Left	18.77	16.67	17.57
n41	40	30	2670	CP	256QAM	Edge_1RB_Right	19.12	17.02	17.92
n41	40	30	2670	CP	256QAM	Outer_Full	19.24	17.14	18.04
n41	45	30	2518.5	DFT	QPSK	Inner_Full	23.86	21.76	22.66
n41	45	30	2518.5	DFT	QPSK	Edge_1RB_Left	23.89	21.79	22.69
n41	45	30	2518.5	DFT	QPSK	Edge_1RB_Right	23.92	21.82	22.72
n41	45	30	2518.5	DFT	QPSK	Outer_Full	23.91	21.81	22.71
n41	45	30	2518.5	DFT	16QAM	Inner_Full	22.97	20.87	21.77
n41	45	30	2518.5	DFT	16QAM	Edge_1RB_Left	22.97	20.87	21.77
n41	45	30	2518.5	DFT	16QAM	Edge_1RB_Right	22.95	20.85	21.75
n41	45	30	2518.5	DFT	16QAM	Outer_Full	22.95	20.85	21.75
n41	45	30	2518.5	DFT	64QAM	Inner_Full	23.43	21.33	22.23
n41	45	30	2518.5	DFT	64QAM	Edge_1RB_Left	23.42	21.32	22.22
n41	45	30	2518.5	DFT	64QAM	Edge_1RB_Right	23.31	21.21	22.11
n41	45	30	2518.5	DFT	64QAM	Outer_Full	23.41	21.31	22.21
n41	45	30	2518.5	DFT	256QAM	Inner_Full	21.34	19.24	20.14
n41	45	30	2518.5	DFT	256QAM	Edge_1RB_Left	21.41	19.31	20.21
n41	45	30	2518.5	DFT	256QAM	Edge_1RB_Right	21.39	19.29	20.19
n41	45	30	2518.5	DFT	256QAM	Outer_Full	21.38	19.28	20.18



BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n41	45	30	2518.5	CP	QPSK	Inner_Full	21.82	19.72	20.62
n41	45	30	2518.5	CP	QPSK	Edge_1RB_Left	21.87	19.77	20.67
n41	45	30	2518.5	CP	QPSK	Edge_1RB_Right	21.84	19.74	20.64
n41	45	30	2518.5	CP	QPSK	Outer_Full	21.85	19.75	20.65
n41	45	30	2518.5	CP	16QAM	Inner_Full	21.82	19.72	20.62
n41	45	30	2518.5	CP	16QAM	Edge_1RB_Left	21.81	19.71	20.61
n41	45	30	2518.5	CP	16QAM	Edge_1RB_Right	21.81	19.71	20.61
n41	45	30	2518.5	CP	16QAM	Outer_Full	21.83	19.73	20.63
n41	45	30	2518.5	CP	64QAM	Inner_Full	21.46	19.36	20.26
n41	45	30	2518.5	CP	64QAM	Edge_1RB_Left	21.45	19.35	20.25
n41	45	30	2518.5	CP	64QAM	Edge_1RB_Right	21.45	19.35	20.25
n41	45	30	2518.5	CP	64QAM	Outer_Full	21.45	19.35	20.25
n41	45	30	2518.5	CP	256QAM	Inner_Full	19.42	17.32	18.22
n41	45	30	2518.5	CP	256QAM	Edge_1RB_Left	19.45	17.35	18.25
n41	45	30	2518.5	CP	256QAM	Edge_1RB_Right	19.42	17.32	18.22
n41	45	30	2518.5	CP	256QAM	Outer_Full	19.43	17.33	18.23
n41	45	30	2592.99	DFT	QPSK	Inner_Full	23.91	21.81	22.71
n41	45	30	2592.99	DFT	QPSK	Edge_1RB_Left	23.93	21.83	22.73
n41	45	30	2592.99	DFT	QPSK	Edge_1RB_Right	23.94	21.84	22.74
n41	45	30	2592.99	DFT	QPSK	Outer_Full	23.99	21.89	22.79
n41	45	30	2592.99	DFT	16QAM	Inner_Full	22.96	20.86	21.76
n41	45	30	2592.99	DFT	16QAM	Edge_1RB_Left	22.98	20.88	21.78
n41	45	30	2592.99	DFT	16QAM	Edge_1RB_Right	23.02	20.92	21.82
n41	45	30	2592.99	DFT	16QAM	Outer_Full	22.96	20.86	21.76
n41	45	30	2592.99	DFT	64QAM	Inner_Full	23.47	21.37	22.27
n41	45	30	2592.99	DFT	64QAM	Edge_1RB_Left	23.46	21.36	22.26
n41	45	30	2592.99	DFT	64QAM	Edge_1RB_Right	23.45	21.35	22.25
n41	45	30	2592.99	DFT	64QAM	Outer_Full	23.45	21.35	22.25
n41	45	30	2592.99	DFT	256QAM	Inner_Full	21.38	19.28	20.18
n41	45	30	2592.99	DFT	256QAM	Edge_1RB_Left	21.42	19.32	20.22



BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n41	45	30	2592.99	DFT	256QAM	Edge_1RB_Right	21.40	19.30	20.20
n41	45	30	2592.99	DFT	256QAM	Outer_Full	21.38	19.28	20.18
n41	45	30	2592.99	CP	QPSK	Inner_Full	21.86	19.76	20.66
n41	45	30	2592.99	CP	QPSK	Edge_1RB_Left	21.90	19.80	20.70
n41	45	30	2592.99	CP	QPSK	Edge_1RB_Right	21.89	19.79	20.69
n41	45	30	2592.99	CP	QPSK	Outer_Full	21.88	19.78	20.68
n41	45	30	2592.99	CP	16QAM	Inner_Full	21.86	19.76	20.66
n41	45	30	2592.99	CP	16QAM	Edge_1RB_Left	21.85	19.75	20.65
n41	45	30	2592.99	CP	16QAM	Edge_1RB_Right	21.85	19.75	20.65
n41	45	30	2592.99	CP	16QAM	Outer_Full	21.91	19.81	20.71
n41	45	30	2592.99	CP	64QAM	Inner_Full	21.43	19.33	20.23
n41	45	30	2592.99	CP	64QAM	Edge_1RB_Left	21.40	19.30	20.20
n41	45	30	2592.99	CP	64QAM	Edge_1RB_Right	21.44	19.34	20.24
n41	45	30	2592.99	CP	64QAM	Outer_Full	21.46	19.36	20.26
n41	45	30	2592.99	CP	256QAM	Inner_Full	19.49	17.39	18.29
n41	45	30	2592.99	CP	256QAM	Edge_1RB_Left	19.49	17.39	18.29
n41	45	30	2592.99	CP	256QAM	Edge_1RB_Right	19.51	17.41	18.31
n41	45	30	2592.99	CP	256QAM	Outer_Full	19.52	17.42	18.32
n41	45	30	2667.48	DFT	QPSK	Inner_Full	23.89	21.79	22.69
n41	45	30	2667.48	DFT	QPSK	Edge_1RB_Left	23.88	21.78	22.68
n41	45	30	2667.48	DFT	QPSK	Edge_1RB_Right	23.92	21.82	22.72
n41	45	30	2667.48	DFT	QPSK	Outer_Full	23.90	21.80	22.70
n41	45	30	2667.48	DFT	16QAM	Inner_Full	22.99	20.89	21.79
n41	45	30	2667.48	DFT	16QAM	Edge_1RB_Left	22.96	20.86	21.76
n41	45	30	2667.48	DFT	16QAM	Edge_1RB_Right	22.91	20.81	21.71
n41	45	30	2667.48	DFT	16QAM	Outer_Full	22.96	20.86	21.76
n41	45	30	2667.48	DFT	64QAM	Inner_Full	23.39	21.29	22.19
n41	45	30	2667.48	DFT	64QAM	Edge_1RB_Left	23.44	21.34	22.24
n41	45	30	2667.48	DFT	64QAM	Edge_1RB_Right	23.43	21.33	22.23
n41	45	30	2667.48	DFT	64QAM	Outer_Full	23.43	21.33	22.23



BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n41	45	30	2667.48	DFT	256QAM	Inner_Full	21.36	19.26	20.16
n41	45	30	2667.48	DFT	256QAM	Edge_1RB_Left	21.38	19.28	20.18
n41	45	30	2667.48	DFT	256QAM	Edge_1RB_Right	21.38	19.28	20.18
n41	45	30	2667.48	DFT	256QAM	Outer_Full	21.37	19.27	20.17
n41	45	30	2667.48	CP	QPSK	Inner_Full	21.83	19.73	20.63
n41	45	30	2667.48	CP	QPSK	Edge_1RB_Left	21.89	19.79	20.69
n41	45	30	2667.48	CP	QPSK	Edge_1RB_Right	21.85	19.75	20.65
n41	45	30	2667.48	CP	QPSK	Outer_Full	21.90	19.80	20.70
n41	45	30	2667.48	CP	16QAM	Inner_Full	21.88	19.78	20.68
n41	45	30	2667.48	CP	16QAM	Edge_1RB_Left	21.87	19.77	20.67
n41	45	30	2667.48	CP	16QAM	Edge_1RB_Right	21.90	19.80	20.70
n41	45	30	2667.48	CP	16QAM	Outer_Full	21.86	19.76	20.66
n41	45	30	2667.48	CP	64QAM	Inner_Full	21.39	19.29	20.19
n41	45	30	2667.48	CP	64QAM	Edge_1RB_Left	21.40	19.30	20.20
n41	45	30	2667.48	CP	64QAM	Edge_1RB_Right	21.41	19.31	20.21
n41	45	30	2667.48	CP	64QAM	Outer_Full	21.40	19.30	20.20
n41	45	30	2667.48	CP	256QAM	Inner_Full	19.44	17.34	18.24
n41	45	30	2667.48	CP	256QAM	Edge_1RB_Left	19.45	17.35	18.25
n41	45	30	2667.48	CP	256QAM	Edge_1RB_Right	19.44	17.34	18.24
n41	45	30	2667.48	CP	256QAM	Outer_Full	19.44	17.34	18.24
n41	50	30	2521.02	DFT	QPSK	Inner_Full	26.02	23.92	24.82
n41	50	30	2521.02	DFT	QPSK	Edge_1RB_Left	22.12	20.02	20.92
n41	50	30	2521.02	DFT	QPSK	Edge_1RB_Right	22.31	20.21	21.11
n41	50	30	2521.02	DFT	QPSK	Outer_Full	24.93	22.83	23.73
n41	50	30	2521.02	DFT	16QAM	Inner_Full	24.94	22.84	23.74
n41	50	30	2521.02	DFT	16QAM	Edge_1RB_Left	22.00	19.90	20.80
n41	50	30	2521.02	DFT	16QAM	Edge_1RB_Right	22.17	20.07	20.97
n41	50	30	2521.02	DFT	16QAM	Outer_Full	23.95	21.85	22.75
n41	50	30	2521.02	DFT	64QAM	Inner_Full	23.44	21.34	22.24
n41	50	30	2521.02	DFT	64QAM	Edge_1RB_Left	21.87	19.77	20.67



BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n41	50	30	2521.02	DFT	64QAM	Edge_1RB_Right	22.00	19.90	20.80
n41	50	30	2521.02	DFT	64QAM	Outer_Full	23.48	21.38	22.28
n41	50	30	2521.02	DFT	256QAM	Inner_Full	21.33	19.23	20.13
n41	50	30	2521.02	DFT	256QAM	Edge_1RB_Left	21.05	18.95	19.85
n41	50	30	2521.02	DFT	256QAM	Edge_1RB_Right	21.20	19.10	20.00
n41	50	30	2521.02	DFT	256QAM	Outer_Full	21.39	19.29	20.19
n41	50	30	2521.02	CP	QPSK	Inner_Full	24.57	22.47	23.37
n41	50	30	2521.02	CP	QPSK	Edge_1RB_Left	22.15	20.05	20.95
n41	50	30	2521.02	CP	QPSK	Edge_1RB_Right	22.32	20.22	21.12
n41	50	30	2521.02	CP	QPSK	Outer_Full	21.87	19.77	20.67
n41	50	30	2521.02	CP	16QAM	Inner_Full	23.97	21.87	22.77
n41	50	30	2521.02	CP	16QAM	Edge_1RB_Left	22.14	20.04	20.94
n41	50	30	2521.02	CP	16QAM	Edge_1RB_Right	22.25	20.15	21.05
n41	50	30	2521.02	CP	16QAM	Outer_Full	21.88	19.78	20.68
n41	50	30	2521.02	CP	64QAM	Inner_Full	22.46	20.36	21.26
n41	50	30	2521.02	CP	64QAM	Edge_1RB_Left	21.93	19.83	20.73
n41	50	30	2521.02	CP	64QAM	Edge_1RB_Right	22.14	20.04	20.94
n41	50	30	2521.02	CP	64QAM	Outer_Full	22.41	20.31	21.21
n41	50	30	2521.02	CP	256QAM	Inner_Full	19.46	17.36	18.26
n41	50	30	2521.02	CP	256QAM	Edge_1RB_Left	19.03	16.93	17.83
n41	50	30	2521.02	CP	256QAM	Edge_1RB_Right	19.18	17.08	17.98
n41	50	30	2521.02	CP	256QAM	Outer_Full	19.40	17.30	18.20
n41	50	30	2592.99	DFT	QPSK	Inner_Full	25.99	23.89	24.79
n41	50	30	2592.99	DFT	QPSK	Edge_1RB_Left	22.20	20.10	21.00
n41	50	30	2592.99	DFT	QPSK	Edge_1RB_Right	22.65	20.55	21.45
n41	50	30	2592.99	DFT	QPSK	Outer_Full	24.98	22.88	23.78
n41	50	30	2592.99	DFT	16QAM	Inner_Full	24.97	22.87	23.77
n41	50	30	2592.99	DFT	16QAM	Edge_1RB_Left	22.03	19.93	20.83
n41	50	30	2592.99	DFT	16QAM	Edge_1RB_Right	22.49	20.39	21.29
n41	50	30	2592.99	DFT	16QAM	Outer_Full	24.02	21.92	22.82



BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n41	50	30	2592.99	DFT	64QAM	Inner_Full	23.44	21.34	22.24
n41	50	30	2592.99	DFT	64QAM	Edge_1RB_Left	21.92	19.82	20.72
n41	50	30	2592.99	DFT	64QAM	Edge_1RB_Right	22.21	20.11	21.01
n41	50	30	2592.99	DFT	64QAM	Outer_Full	23.49	21.39	22.29
n41	50	30	2592.99	DFT	256QAM	Inner_Full	21.33	19.23	20.13
n41	50	30	2592.99	DFT	256QAM	Edge_1RB_Left	21.09	18.99	19.89
n41	50	30	2592.99	DFT	256QAM	Edge_1RB_Right	21.56	19.46	20.36
n41	50	30	2592.99	DFT	256QAM	Outer_Full	21.47	19.37	20.27
n41	50	30	2592.99	CP	QPSK	Inner_Full	24.52	22.42	23.32
n41	50	30	2592.99	CP	QPSK	Edge_1RB_Left	22.23	20.13	21.03
n41	50	30	2592.99	CP	QPSK	Edge_1RB_Right	22.66	20.56	21.46
n41	50	30	2592.99	CP	QPSK	Outer_Full	21.90	19.80	20.70
n41	50	30	2592.99	CP	16QAM	Inner_Full	23.97	21.87	22.77
n41	50	30	2592.99	CP	16QAM	Edge_1RB_Left	22.12	20.02	20.92
n41	50	30	2592.99	CP	16QAM	Edge_1RB_Right	22.62	20.52	21.42
n41	50	30	2592.99	CP	16QAM	Outer_Full	21.90	19.80	20.70
n41	50	30	2592.99	CP	64QAM	Inner_Full	22.47	20.37	21.27
n41	50	30	2592.99	CP	64QAM	Edge_1RB_Left	21.94	19.84	20.74
n41	50	30	2592.99	CP	64QAM	Edge_1RB_Right	22.40	20.30	21.20
n41	50	30	2592.99	CP	64QAM	Outer_Full	22.45	20.35	21.25
n41	50	30	2592.99	CP	256QAM	Inner_Full	19.45	17.35	18.25
n41	50	30	2592.99	CP	256QAM	Edge_1RB_Left	19.05	16.95	17.85
n41	50	30	2592.99	CP	256QAM	Edge_1RB_Right	19.52	17.42	18.32
n41	50	30	2592.99	CP	256QAM	Outer_Full	19.50	17.40	18.30
n41	50	30	2664.99	DFT	QPSK	Inner_Full	25.90	23.80	24.70
n41	50	30	2664.99	DFT	QPSK	Edge_1RB_Left	22.10	20.00	20.90
n41	50	30	2664.99	DFT	QPSK	Edge_1RB_Right	22.52	20.42	21.32
n41	50	30	2664.99	DFT	QPSK	Outer_Full	24.85	22.75	23.65
n41	50	30	2664.99	DFT	16QAM	Inner_Full	24.91	22.81	23.71
n41	50	30	2664.99	DFT	16QAM	Edge_1RB_Left	21.96	19.86	20.76



BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n41	50	30	2664.99	DFT	16QAM	Edge_1RB_Right	22.30	20.20	21.10
n41	50	30	2664.99	DFT	16QAM	Outer_Full	23.89	21.79	22.69
n41	50	30	2664.99	DFT	64QAM	Inner_Full	23.40	21.30	22.20
n41	50	30	2664.99	DFT	64QAM	Edge_1RB_Left	21.92	19.82	20.72
n41	50	30	2664.99	DFT	64QAM	Edge_1RB_Right	22.16	20.06	20.96
n41	50	30	2664.99	DFT	64QAM	Outer_Full	23.42	21.32	22.22
n41	50	30	2664.99	DFT	256QAM	Inner_Full	21.33	19.23	20.13
n41	50	30	2664.99	DFT	256QAM	Edge_1RB_Left	21.03	18.93	19.83
n41	50	30	2664.99	DFT	256QAM	Edge_1RB_Right	21.44	19.34	20.24
n41	50	30	2664.99	DFT	256QAM	Outer_Full	21.38	19.28	20.18
n41	50	30	2664.99	CP	QPSK	Inner_Full	24.47	22.37	23.27
n41	50	30	2664.99	CP	QPSK	Edge_1RB_Left	22.19	20.09	20.99
n41	50	30	2664.99	CP	QPSK	Edge_1RB_Right	22.50	20.40	21.30
n41	50	30	2664.99	CP	QPSK	Outer_Full	21.89	19.79	20.69
n41	50	30	2664.99	CP	16QAM	Inner_Full	23.90	21.80	22.70
n41	50	30	2664.99	CP	16QAM	Edge_1RB_Left	22.13	20.03	20.93
n41	50	30	2664.99	CP	16QAM	Edge_1RB_Right	22.39	20.29	21.19
n41	50	30	2664.99	CP	16QAM	Outer_Full	21.85	19.75	20.65
n41	50	30	2664.99	CP	64QAM	Inner_Full	22.44	20.34	21.24
n41	50	30	2664.99	CP	64QAM	Edge_1RB_Left	22.02	19.92	20.82
n41	50	30	2664.99	CP	64QAM	Edge_1RB_Right	22.26	20.16	21.06
n41	50	30	2664.99	CP	64QAM	Outer_Full	22.40	20.30	21.20
n41	50	30	2664.99	CP	256QAM	Inner_Full	19.44	17.34	18.24
n41	50	30	2664.99	CP	256QAM	Edge_1RB_Left	19.01	16.91	17.81
n41	50	30	2664.99	CP	256QAM	Edge_1RB_Right	19.30	17.20	18.10
n41	50	30	2664.99	CP	256QAM	Outer_Full	19.40	17.30	18.20
n41	60	30	2526	DFT	QPSK	Inner_Full	25.79	23.69	24.59
n41	60	30	2526	DFT	QPSK	Edge_1RB_Left	22.04	19.94	20.84
n41	60	30	2526	DFT	QPSK	Edge_1RB_Right	22.16	20.06	20.96
n41	60	30	2526	DFT	QPSK	Outer_Full	24.87	22.77	23.67



BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n41	60	30	2526	DFT	16QAM	Inner_Full	24.68	22.58	23.48
n41	60	30	2526	DFT	16QAM	Edge_1RB_Left	21.86	19.76	20.66
n41	60	30	2526	DFT	16QAM	Edge_1RB_Right	21.89	19.79	20.69
n41	60	30	2526	DFT	16QAM	Outer_Full	23.70	21.60	22.50
n41	60	30	2526	DFT	64QAM	Inner_Full	23.23	21.13	22.03
n41	60	30	2526	DFT	64QAM	Edge_1RB_Left	21.76	19.66	20.56
n41	60	30	2526	DFT	64QAM	Edge_1RB_Right	21.82	19.72	20.62
n41	60	30	2526	DFT	64QAM	Outer_Full	23.23	21.13	22.03
n41	60	30	2526	DFT	256QAM	Inner_Full	21.13	19.03	19.93
n41	60	30	2526	DFT	256QAM	Edge_1RB_Left	20.88	18.78	19.68
n41	60	30	2526	DFT	256QAM	Edge_1RB_Right	21.07	18.97	19.87
n41	60	30	2526	DFT	256QAM	Outer_Full	21.20	19.10	20.00
n41	60	30	2526	CP	QPSK	Inner_Full	24.18	22.08	22.98
n41	60	30	2526	CP	QPSK	Edge_1RB_Left	22.09	19.99	20.89
n41	60	30	2526	CP	QPSK	Edge_1RB_Right	22.27	20.17	21.07
n41	60	30	2526	CP	QPSK	Outer_Full	21.71	19.61	20.51
n41	60	30	2526	CP	16QAM	Inner_Full	23.73	21.63	22.53
n41	60	30	2526	CP	16QAM	Edge_1RB_Left	21.98	19.88	20.78
n41	60	30	2526	CP	16QAM	Edge_1RB_Right	22.10	20.00	20.90
n41	60	30	2526	CP	16QAM	Outer_Full	21.67	19.57	20.47
n41	60	30	2526	CP	64QAM	Inner_Full	22.22	20.12	21.02
n41	60	30	2526	CP	64QAM	Edge_1RB_Left	21.94	19.84	20.74
n41	60	30	2526	CP	64QAM	Edge_1RB_Right	22.00	19.90	20.80
n41	60	30	2526	CP	64QAM	Outer_Full	22.20	20.10	21.00
n41	60	30	2526	CP	256QAM	Inner_Full	19.22	17.12	18.02
n41	60	30	2526	CP	256QAM	Edge_1RB_Left	18.85	16.75	17.65
n41	60	30	2526	CP	256QAM	Edge_1RB_Right	19.00	16.90	17.80
n41	60	30	2526	CP	256QAM	Outer_Full	19.23	17.13	18.03
n41	60	30	2592.99	DFT	QPSK	Inner_Full	25.76	23.66	24.56
n41	60	30	2592.99	DFT	QPSK	Edge_1RB_Left	22.12	20.02	20.92



BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n41	60	30	2592.99	DFT	QPSK	Edge_1RB_Right	22.51	20.41	21.31
n41	60	30	2592.99	DFT	QPSK	Outer_Full	24.95	22.85	23.75
n41	60	30	2592.99	DFT	16QAM	Inner_Full	24.72	22.62	23.52
n41	60	30	2592.99	DFT	16QAM	Edge_1RB_Left	22.01	19.91	20.81
n41	60	30	2592.99	DFT	16QAM	Edge_1RB_Right	22.19	20.09	20.99
n41	60	30	2592.99	DFT	16QAM	Outer_Full	23.79	21.69	22.59
n41	60	30	2592.99	DFT	64QAM	Inner_Full	23.25	21.15	22.05
n41	60	30	2592.99	DFT	64QAM	Edge_1RB_Left	21.75	19.65	20.55
n41	60	30	2592.99	DFT	64QAM	Edge_1RB_Right	22.11	20.01	20.91
n41	60	30	2592.99	DFT	64QAM	Outer_Full	23.30	21.20	22.10
n41	60	30	2592.99	DFT	256QAM	Inner_Full	21.16	19.06	19.96
n41	60	30	2592.99	DFT	256QAM	Edge_1RB_Left	21.04	18.94	19.84
n41	60	30	2592.99	DFT	256QAM	Edge_1RB_Right	21.26	19.16	20.06
n41	60	30	2592.99	DFT	256QAM	Outer_Full	21.27	19.17	20.07
n41	60	30	2592.99	CP	QPSK	Inner_Full	24.27	22.17	23.07
n41	60	30	2592.99	CP	QPSK	Edge_1RB_Left	22.23	20.13	21.03
n41	60	30	2592.99	CP	QPSK	Edge_1RB_Right	22.55	20.45	21.35
n41	60	30	2592.99	CP	QPSK	Outer_Full	21.74	19.64	20.54
n41	60	30	2592.99	CP	16QAM	Inner_Full	23.82	21.72	22.62
n41	60	30	2592.99	CP	16QAM	Edge_1RB_Left	22.04	19.94	20.84
n41	60	30	2592.99	CP	16QAM	Edge_1RB_Right	22.46	20.36	21.26
n41	60	30	2592.99	CP	16QAM	Outer_Full	21.65	19.55	20.45
n41	60	30	2592.99	CP	64QAM	Inner_Full	22.24	20.14	21.04
n41	60	30	2592.99	CP	64QAM	Edge_1RB_Left	21.97	19.87	20.77
n41	60	30	2592.99	CP	64QAM	Edge_1RB_Right	22.24	20.14	21.04
n41	60	30	2592.99	CP	64QAM	Outer_Full	22.15	20.05	20.95
n41	60	30	2592.99	CP	256QAM	Inner_Full	19.15	17.05	17.95
n41	60	30	2592.99	CP	256QAM	Edge_1RB_Left	18.99	16.89	17.79
n41	60	30	2592.99	CP	256QAM	Edge_1RB_Right	19.38	17.28	18.18
n41	60	30	2592.99	CP	256QAM	Outer_Full	19.32	17.22	18.12



BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n41	60	30	2659.98	DFT	QPSK	Inner_Full	25.78	23.68	24.58
n41	60	30	2659.98	DFT	QPSK	Edge_1RB_Left	22.08	19.98	20.88
n41	60	30	2659.98	DFT	QPSK	Edge_1RB_Right	22.41	20.31	21.21
n41	60	30	2659.98	DFT	QPSK	Outer_Full	24.76	22.66	23.56
n41	60	30	2659.98	DFT	16QAM	Inner_Full	24.69	22.59	23.49
n41	60	30	2659.98	DFT	16QAM	Edge_1RB_Left	21.95	19.85	20.75
n41	60	30	2659.98	DFT	16QAM	Edge_1RB_Right	22.26	20.16	21.06
n41	60	30	2659.98	DFT	16QAM	Outer_Full	23.71	21.61	22.51
n41	60	30	2659.98	DFT	64QAM	Inner_Full	23.23	21.13	22.03
n41	60	30	2659.98	DFT	64QAM	Edge_1RB_Left	21.85	19.75	20.65
n41	60	30	2659.98	DFT	64QAM	Edge_1RB_Right	22.12	20.02	20.92
n41	60	30	2659.98	DFT	64QAM	Outer_Full	23.27	21.17	22.07
n41	60	30	2659.98	DFT	256QAM	Inner_Full	21.23	19.13	20.03
n41	60	30	2659.98	DFT	256QAM	Edge_1RB_Left	21.01	18.91	19.81
n41	60	30	2659.98	DFT	256QAM	Edge_1RB_Right	21.30	19.20	20.10
n41	60	30	2659.98	DFT	256QAM	Outer_Full	21.20	19.10	20.00
n41	60	30	2659.98	CP	QPSK	Inner_Full	24.25	22.15	23.05
n41	60	30	2659.98	CP	QPSK	Edge_1RB_Left	22.14	20.04	20.94
n41	60	30	2659.98	CP	QPSK	Edge_1RB_Right	22.51	20.41	21.31
n41	60	30	2659.98	CP	QPSK	Outer_Full	21.68	19.58	20.48
n41	60	30	2659.98	CP	16QAM	Inner_Full	23.75	21.65	22.55
n41	60	30	2659.98	CP	16QAM	Edge_1RB_Left	22.08	19.98	20.88
n41	60	30	2659.98	CP	16QAM	Edge_1RB_Right	22.38	20.28	21.18
n41	60	30	2659.98	CP	16QAM	Outer_Full	21.73	19.63	20.53
n41	60	30	2659.98	CP	64QAM	Inner_Full	22.20	20.10	21.00
n41	60	30	2659.98	CP	64QAM	Edge_1RB_Left	21.86	19.76	20.66
n41	60	30	2659.98	CP	64QAM	Edge_1RB_Right	22.14	20.04	20.94
n41	60	30	2659.98	CP	64QAM	Outer_Full	22.22	20.12	21.02
n41	60	30	2659.98	CP	256QAM	Inner_Full	19.18	17.08	17.98
n41	60	30	2659.98	CP	256QAM	Edge_1RB_Left	18.95	16.85	17.75



BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n41	60	30	2659.98	CP	256QAM	Edge_1RB_Right	19.30	17.20	18.10
n41	60	30	2659.98	CP	256QAM	Outer_Full	19.24	17.14	18.04
n41	70	30	2531.01	DFT	QPSK	Inner_Full	25.86	23.76	24.66
n41	70	30	2531.01	DFT	QPSK	Edge_1RB_Left	22.12	20.02	20.92
n41	70	30	2531.01	DFT	QPSK	Edge_1RB_Right	22.17	20.07	20.97
n41	70	30	2531.01	DFT	QPSK	Outer_Full	24.79	22.69	23.59
n41	70	30	2531.01	DFT	16QAM	Inner_Full	24.75	22.65	23.55
n41	70	30	2531.01	DFT	16QAM	Edge_1RB_Left	21.86	19.76	20.66
n41	70	30	2531.01	DFT	16QAM	Edge_1RB_Right	21.93	19.83	20.73
n41	70	30	2531.01	DFT	16QAM	Outer_Full	23.85	21.75	22.65
n41	70	30	2531.01	DFT	64QAM	Inner_Full	23.26	21.16	22.06
n41	70	30	2531.01	DFT	64QAM	Edge_1RB_Left	21.79	19.69	20.59
n41	70	30	2531.01	DFT	64QAM	Edge_1RB_Right	21.88	19.78	20.68
n41	70	30	2531.01	DFT	64QAM	Outer_Full	23.29	21.19	22.09
n41	70	30	2531.01	DFT	256QAM	Inner_Full	21.24	19.14	20.04
n41	70	30	2531.01	DFT	256QAM	Edge_1RB_Left	21.06	18.96	19.86
n41	70	30	2531.01	DFT	256QAM	Edge_1RB_Right	21.02	18.92	19.82
n41	70	30	2531.01	DFT	256QAM	Outer_Full	21.29	19.19	20.09
n41	70	30	2531.01	CP	QPSK	Inner_Full	24.57	22.47	23.37
n41	70	30	2531.01	CP	QPSK	Edge_1RB_Left	22.15	20.05	20.95
n41	70	30	2531.01	CP	QPSK	Edge_1RB_Right	22.24	20.14	21.04
n41	70	30	2531.01	CP	QPSK	Outer_Full	21.83	19.73	20.63
n41	70	30	2531.01	CP	16QAM	Inner_Full	23.86	21.76	22.66
n41	70	30	2531.01	CP	16QAM	Edge_1RB_Left	22.11	20.01	20.91
n41	70	30	2531.01	CP	16QAM	Edge_1RB_Right	22.01	19.91	20.81
n41	70	30	2531.01	CP	16QAM	Outer_Full	21.71	19.61	20.51
n41	70	30	2531.01	CP	64QAM	Inner_Full	22.28	20.18	21.08
n41	70	30	2531.01	CP	64QAM	Edge_1RB_Left	22.00	19.90	20.80
n41	70	30	2531.01	CP	64QAM	Edge_1RB_Right	21.98	19.88	20.78
n41	70	30	2531.01	CP	64QAM	Outer_Full	22.21	20.11	21.01



BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n41	70	30	2531.01	CP	256QAM	Inner_Full	19.26	17.16	18.06
n41	70	30	2531.01	CP	256QAM	Edge_1RB_Left	18.98	16.88	17.78
n41	70	30	2531.01	CP	256QAM	Edge_1RB_Right	18.94	16.84	17.74
n41	70	30	2531.01	CP	256QAM	Outer_Full	19.27	17.17	18.07
n41	70	30	2592.99	DFT	QPSK	Inner_Full	25.89	23.79	24.69
n41	70	30	2592.99	DFT	QPSK	Edge_1RB_Left	22.16	20.06	20.96
n41	70	30	2592.99	DFT	QPSK	Edge_1RB_Right	22.43	20.33	21.23
n41	70	30	2592.99	DFT	QPSK	Outer_Full	24.82	22.72	23.62
n41	70	30	2592.99	DFT	16QAM	Inner_Full	24.77	22.67	23.57
n41	70	30	2592.99	DFT	16QAM	Edge_1RB_Left	22.01	19.91	20.81
n41	70	30	2592.99	DFT	16QAM	Edge_1RB_Right	22.25	20.15	21.05
n41	70	30	2592.99	DFT	16QAM	Outer_Full	23.95	21.85	22.75
n41	70	30	2592.99	DFT	64QAM	Inner_Full	23.26	21.16	22.06
n41	70	30	2592.99	DFT	64QAM	Edge_1RB_Left	21.89	19.79	20.69
n41	70	30	2592.99	DFT	64QAM	Edge_1RB_Right	22.18	20.08	20.98
n41	70	30	2592.99	DFT	64QAM	Outer_Full	23.35	21.25	22.15
n41	70	30	2592.99	DFT	256QAM	Inner_Full	21.24	19.14	20.04
n41	70	30	2592.99	DFT	256QAM	Edge_1RB_Left	21.02	18.92	19.82
n41	70	30	2592.99	DFT	256QAM	Edge_1RB_Right	21.32	19.22	20.12
n41	70	30	2592.99	DFT	256QAM	Outer_Full	21.36	19.26	20.16
n41	70	30	2592.99	CP	QPSK	Inner_Full	24.38	22.28	23.18
n41	70	30	2592.99	CP	QPSK	Edge_1RB_Left	22.17	20.07	20.97
n41	70	30	2592.99	CP	QPSK	Edge_1RB_Right	22.43	20.33	21.23
n41	70	30	2592.99	CP	QPSK	Outer_Full	21.83	19.73	20.63
n41	70	30	2592.99	CP	16QAM	Inner_Full	23.90	21.80	22.70
n41	70	30	2592.99	CP	16QAM	Edge_1RB_Left	22.12	20.02	20.92
n41	70	30	2592.99	CP	16QAM	Edge_1RB_Right	22.40	20.30	21.20
n41	70	30	2592.99	CP	16QAM	Outer_Full	21.79	19.69	20.59
n41	70	30	2592.99	CP	64QAM	Inner_Full	22.29	20.19	21.09
n41	70	30	2592.99	CP	64QAM	Edge_1RB_Left	21.88	19.78	20.68



BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n41	70	30	2592.99	CP	64QAM	Edge_1RB_Right	22.33	20.23	21.13
n41	70	30	2592.99	CP	64QAM	Outer_Full	22.34	20.24	21.14
n41	70	30	2592.99	CP	256QAM	Inner_Full	19.29	17.19	18.09
n41	70	30	2592.99	CP	256QAM	Edge_1RB_Left	19.00	16.90	17.80
n41	70	30	2592.99	CP	256QAM	Edge_1RB_Right	19.27	17.17	18.07
n41	70	30	2592.99	CP	256QAM	Outer_Full	19.29	17.19	18.09
n41	70	30	2655	DFT	QPSK	Inner_Full	25.94	23.84	24.74
n41	70	30	2655	DFT	QPSK	Edge_1RB_Left	22.15	20.05	20.95
n41	70	30	2655	DFT	QPSK	Edge_1RB_Right	22.54	20.44	21.34
n41	70	30	2655	DFT	QPSK	Outer_Full	24.93	22.83	23.73
n41	70	30	2655	DFT	16QAM	Inner_Full	24.86	22.76	23.66
n41	70	30	2655	DFT	16QAM	Edge_1RB_Left	21.96	19.86	20.76
n41	70	30	2655	DFT	16QAM	Edge_1RB_Right	22.24	20.14	21.04
n41	70	30	2655	DFT	16QAM	Outer_Full	23.92	21.82	22.72
n41	70	30	2655	DFT	64QAM	Inner_Full	23.35	21.25	22.15
n41	70	30	2655	DFT	64QAM	Edge_1RB_Left	21.89	19.79	20.69
n41	70	30	2655	DFT	64QAM	Edge_1RB_Right	22.23	20.13	21.03
n41	70	30	2655	DFT	64QAM	Outer_Full	23.32	21.22	22.12
n41	70	30	2655	DFT	256QAM	Inner_Full	21.31	19.21	20.11
n41	70	30	2655	DFT	256QAM	Edge_1RB_Left	21.09	18.99	19.89
n41	70	30	2655	DFT	256QAM	Edge_1RB_Right	21.44	19.34	20.24
n41	70	30	2655	DFT	256QAM	Outer_Full	21.41	19.31	20.21
n41	70	30	2655	CP	QPSK	Inner_Full	24.34	22.24	23.14
n41	70	30	2655	CP	QPSK	Edge_1RB_Left	22.23	20.13	21.03
n41	70	30	2655	CP	QPSK	Edge_1RB_Right	22.58	20.48	21.38
n41	70	30	2655	CP	QPSK	Outer_Full	21.92	19.82	20.72
n41	70	30	2655	CP	16QAM	Inner_Full	23.98	21.88	22.78
n41	70	30	2655	CP	16QAM	Edge_1RB_Left	22.16	20.06	20.96
n41	70	30	2655	CP	16QAM	Edge_1RB_Right	22.44	20.34	21.24
n41	70	30	2655	CP	16QAM	Outer_Full	21.80	19.70	20.60



BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n41	70	30	2655	CP	64QAM	Inner_Full	22.41	20.31	21.21
n41	70	30	2655	CP	64QAM	Edge_1RB_Left	22.00	19.90	20.80
n41	70	30	2655	CP	64QAM	Edge_1RB_Right	22.22	20.12	21.02
n41	70	30	2655	CP	64QAM	Outer_Full	22.41	20.31	21.21
n41	70	30	2655	CP	256QAM	Inner_Full	19.35	17.25	18.15
n41	70	30	2655	CP	256QAM	Edge_1RB_Left	19.04	16.94	17.84
n41	70	30	2655	CP	256QAM	Edge_1RB_Right	19.39	17.29	18.19
n41	70	30	2655	CP	256QAM	Outer_Full	19.31	17.21	18.11
n41	80	30	2536.02	DFT	QPSK	Inner_Full	25.87	23.77	24.67
n41	80	30	2536.02	DFT	QPSK	Edge_1RB_Left	22.15	20.05	20.95
n41	80	30	2536.02	DFT	QPSK	Edge_1RB_Right	22.14	20.04	20.94
n41	80	30	2536.02	DFT	QPSK	Outer_Full	24.84	22.74	23.64
n41	80	30	2536.02	DFT	16QAM	Inner_Full	24.81	22.71	23.61
n41	80	30	2536.02	DFT	16QAM	Edge_1RB_Left	21.94	19.84	20.74
n41	80	30	2536.02	DFT	16QAM	Edge_1RB_Right	21.96	19.86	20.76
n41	80	30	2536.02	DFT	16QAM	Outer_Full	23.73	21.63	22.53
n41	80	30	2536.02	DFT	64QAM	Inner_Full	23.28	21.18	22.08
n41	80	30	2536.02	DFT	64QAM	Edge_1RB_Left	21.74	19.64	20.54
n41	80	30	2536.02	DFT	64QAM	Edge_1RB_Right	21.86	19.76	20.66
n41	80	30	2536.02	DFT	64QAM	Outer_Full	23.24	21.14	22.04
n41	80	30	2536.02	DFT	256QAM	Inner_Full	21.28	19.18	20.08
n41	80	30	2536.02	DFT	256QAM	Edge_1RB_Left	21.04	18.94	19.84
n41	80	30	2536.02	DFT	256QAM	Edge_1RB_Right	21.09	18.99	19.89
n41	80	30	2536.02	DFT	256QAM	Outer_Full	21.21	19.11	20.01
n41	80	30	2536.02	CP	QPSK	Inner_Full	24.26	22.16	23.06
n41	80	30	2536.02	CP	QPSK	Edge_1RB_Left	22.13	20.03	20.93
n41	80	30	2536.02	CP	QPSK	Edge_1RB_Right	22.19	20.09	20.99
n41	80	30	2536.02	CP	QPSK	Outer_Full	21.89	19.79	20.69
n41	80	30	2536.02	CP	16QAM	Inner_Full	23.94	21.84	22.74
n41	80	30	2536.02	CP	16QAM	Edge_1RB_Left	22.07	19.97	20.87



BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n41	80	30	2536.02	CP	16QAM	Edge_1RB_Right	22.13	20.03	20.93
n41	80	30	2536.02	CP	16QAM	Outer_Full	21.87	19.77	20.67
n41	80	30	2536.02	CP	64QAM	Inner_Full	22.30	20.20	21.10
n41	80	30	2536.02	CP	64QAM	Edge_1RB_Left	21.82	19.72	20.62
n41	80	30	2536.02	CP	64QAM	Edge_1RB_Right	21.95	19.85	20.75
n41	80	30	2536.02	CP	64QAM	Outer_Full	22.27	20.17	21.07
n41	80	30	2536.02	CP	256QAM	Inner_Full	19.30	17.20	18.10
n41	80	30	2536.02	CP	256QAM	Edge_1RB_Left	18.94	16.84	17.74
n41	80	30	2536.02	CP	256QAM	Edge_1RB_Right	19.02	16.92	17.82
n41	80	30	2536.02	CP	256QAM	Outer_Full	19.23	17.13	18.03
n41	80	30	2592.99	DFT	QPSK	Inner_Full	25.93	23.83	24.73
n41	80	30	2592.99	DFT	QPSK	Edge_1RB_Left	22.19	20.09	20.99
n41	80	30	2592.99	DFT	QPSK	Edge_1RB_Right	22.47	20.37	21.27
n41	80	30	2592.99	DFT	QPSK	Outer_Full	24.97	22.87	23.77
n41	80	30	2592.99	DFT	16QAM	Inner_Full	24.86	22.76	23.66
n41	80	30	2592.99	DFT	16QAM	Edge_1RB_Left	22.05	19.95	20.85
n41	80	30	2592.99	DFT	16QAM	Edge_1RB_Right	22.32	20.22	21.12
n41	80	30	2592.99	DFT	16QAM	Outer_Full	23.88	21.78	22.68
n41	80	30	2592.99	DFT	64QAM	Inner_Full	23.36	21.26	22.16
n41	80	30	2592.99	DFT	64QAM	Edge_1RB_Left	21.93	19.83	20.73
n41	80	30	2592.99	DFT	64QAM	Edge_1RB_Right	22.19	20.09	20.99
n41	80	30	2592.99	DFT	64QAM	Outer_Full	23.35	21.25	22.15
n41	80	30	2592.99	DFT	256QAM	Inner_Full	21.24	19.14	20.04
n41	80	30	2592.99	DFT	256QAM	Edge_1RB_Left	21.07	18.97	19.87
n41	80	30	2592.99	DFT	256QAM	Edge_1RB_Right	21.38	19.28	20.18
n41	80	30	2592.99	DFT	256QAM	Outer_Full	21.31	19.21	20.11
n41	80	30	2592.99	CP	QPSK	Inner_Full	24.46	22.36	23.26
n41	80	30	2592.99	CP	QPSK	Edge_1RB_Left	22.21	20.11	21.01
n41	80	30	2592.99	CP	QPSK	Edge_1RB_Right	22.48	20.38	21.28
n41	80	30	2592.99	CP	QPSK	Outer_Full	21.95	19.85	20.75



BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n41	80	30	2592.99	CP	16QAM	Inner_Full	23.87	21.77	22.67
n41	80	30	2592.99	CP	16QAM	Edge_1RB_Left	22.11	20.01	20.91
n41	80	30	2592.99	CP	16QAM	Edge_1RB_Right	22.42	20.32	21.22
n41	80	30	2592.99	CP	16QAM	Outer_Full	21.94	19.84	20.74
n41	80	30	2592.99	CP	64QAM	Inner_Full	22.32	20.22	21.12
n41	80	30	2592.99	CP	64QAM	Edge_1RB_Left	21.99	19.89	20.79
n41	80	30	2592.99	CP	64QAM	Edge_1RB_Right	22.34	20.24	21.14
n41	80	30	2592.99	CP	64QAM	Outer_Full	22.35	20.25	21.15
n41	80	30	2592.99	CP	256QAM	Inner_Full	19.30	17.20	18.10
n41	80	30	2592.99	CP	256QAM	Edge_1RB_Left	19.03	16.93	17.83
n41	80	30	2592.99	CP	256QAM	Edge_1RB_Right	19.27	17.17	18.07
n41	80	30	2592.99	CP	256QAM	Outer_Full	19.38	17.28	18.18
n41	80	30	2649.99	DFT	QPSK	Inner_Full	25.90	23.80	24.70
n41	80	30	2649.99	DFT	QPSK	Edge_1RB_Left	22.17	20.07	20.97
n41	80	30	2649.99	DFT	QPSK	Edge_1RB_Right	22.57	20.47	21.37
n41	80	30	2649.99	DFT	QPSK	Outer_Full	25.05	22.95	23.85
n41	80	30	2649.99	DFT	16QAM	Inner_Full	24.79	22.69	23.59
n41	80	30	2649.99	DFT	16QAM	Edge_1RB_Left	22.04	19.94	20.84
n41	80	30	2649.99	DFT	16QAM	Edge_1RB_Right	22.40	20.30	21.20
n41	80	30	2649.99	DFT	16QAM	Outer_Full	23.90	21.80	22.70
n41	80	30	2649.99	DFT	64QAM	Inner_Full	23.31	21.21	22.11
n41	80	30	2649.99	DFT	64QAM	Edge_1RB_Left	21.78	19.68	20.58
n41	80	30	2649.99	DFT	64QAM	Edge_1RB_Right	22.17	20.07	20.97
n41	80	30	2649.99	DFT	64QAM	Outer_Full	23.36	21.26	22.16
n41	80	30	2649.99	DFT	256QAM	Inner_Full	21.32	19.22	20.12
n41	80	30	2649.99	DFT	256QAM	Edge_1RB_Left	21.10	19.00	19.90
n41	80	30	2649.99	DFT	256QAM	Edge_1RB_Right	21.53	19.43	20.33
n41	80	30	2649.99	DFT	256QAM	Outer_Full	21.31	19.21	20.11
n41	80	30	2649.99	CP	QPSK	Inner_Full	24.46	22.36	23.26
n41	80	30	2649.99	CP	QPSK	Edge_1RB_Left	22.18	20.08	20.98



BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n41	80	30	2649.99	CP	QPSK	Edge_1RB_Right	22.73	20.63	21.53
n41	80	30	2649.99	CP	QPSK	Outer_Full	21.84	19.74	20.64
n41	80	30	2649.99	CP	16QAM	Inner_Full	23.86	21.76	22.66
n41	80	30	2649.99	CP	16QAM	Edge_1RB_Left	22.13	20.03	20.93
n41	80	30	2649.99	CP	16QAM	Edge_1RB_Right	22.46	20.36	21.26
n41	80	30	2649.99	CP	16QAM	Outer_Full	21.82	19.72	20.62
n41	80	30	2649.99	CP	64QAM	Inner_Full	22.28	20.18	21.08
n41	80	30	2649.99	CP	64QAM	Edge_1RB_Left	21.97	19.87	20.77
n41	80	30	2649.99	CP	64QAM	Edge_1RB_Right	22.25	20.15	21.05
n41	80	30	2649.99	CP	64QAM	Outer_Full	22.32	20.22	21.12
n41	80	30	2649.99	CP	256QAM	Inner_Full	19.30	17.20	18.10
n41	80	30	2649.99	CP	256QAM	Edge_1RB_Left	18.97	16.87	17.77
n41	80	30	2649.99	CP	256QAM	Edge_1RB_Right	19.32	17.22	18.12
n41	80	30	2649.99	CP	256QAM	Outer_Full	19.36	17.26	18.16
n41	90	30	2541	DFT	QPSK	Inner_Full	25.88	23.78	24.68
n41	90	30	2541	DFT	QPSK	Edge_1RB_Left	22.18	20.08	20.98
n41	90	30	2541	DFT	QPSK	Edge_1RB_Right	22.24	20.14	21.04
n41	90	30	2541	DFT	QPSK	Outer_Full	25.16	23.06	23.96
n41	90	30	2541	DFT	16QAM	Inner_Full	24.75	22.65	23.55
n41	90	30	2541	DFT	16QAM	Edge_1RB_Left	21.91	19.81	20.71
n41	90	30	2541	DFT	16QAM	Edge_1RB_Right	21.96	19.86	20.76
n41	90	30	2541	DFT	16QAM	Outer_Full	23.77	21.67	22.57
n41	90	30	2541	DFT	64QAM	Inner_Full	23.33	21.23	22.13
n41	90	30	2541	DFT	64QAM	Edge_1RB_Left	21.80	19.70	20.60
n41	90	30	2541	DFT	64QAM	Edge_1RB_Right	21.83	19.73	20.63
n41	90	30	2541	DFT	64QAM	Outer_Full	23.30	21.20	22.10
n41	90	30	2541	DFT	256QAM	Inner_Full	21.30	19.20	20.10
n41	90	30	2541	DFT	256QAM	Edge_1RB_Left	21.09	18.99	19.89
n41	90	30	2541	DFT	256QAM	Edge_1RB_Right	21.15	19.05	19.95
n41	90	30	2541	DFT	256QAM	Outer_Full	21.34	19.24	20.14



BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n41	90	30	2541	CP	QPSK	Inner_Full	24.52	22.42	23.32
n41	90	30	2541	CP	QPSK	Edge_1RB_Left	22.29	20.19	21.09
n41	90	30	2541	CP	QPSK	Edge_1RB_Right	22.31	20.21	21.11
n41	90	30	2541	CP	QPSK	Outer_Full	21.78	19.68	20.58
n41	90	30	2541	CP	16QAM	Inner_Full	23.78	21.68	22.58
n41	90	30	2541	CP	16QAM	Edge_1RB_Left	22.02	19.92	20.82
n41	90	30	2541	CP	16QAM	Edge_1RB_Right	22.17	20.07	20.97
n41	90	30	2541	CP	16QAM	Outer_Full	21.77	19.67	20.57
n41	90	30	2541	CP	64QAM	Inner_Full	22.33	20.23	21.13
n41	90	30	2541	CP	64QAM	Edge_1RB_Left	21.91	19.81	20.71
n41	90	30	2541	CP	64QAM	Edge_1RB_Right	21.97	19.87	20.77
n41	90	30	2541	CP	64QAM	Outer_Full	22.19	20.09	20.99
n41	90	30	2541	CP	256QAM	Inner_Full	19.24	17.14	18.04
n41	90	30	2541	CP	256QAM	Edge_1RB_Left	18.87	16.77	17.67
n41	90	30	2541	CP	256QAM	Edge_1RB_Right	19.03	16.93	17.83
n41	90	30	2541	CP	256QAM	Outer_Full	19.22	17.12	18.02
n41	90	30	2592.99	DFT	QPSK	Inner_Full	25.99	23.89	24.79
n41	90	30	2592.99	DFT	QPSK	Edge_1RB_Left	22.20	20.10	21.00
n41	90	30	2592.99	DFT	QPSK	Edge_1RB_Right	22.48	20.38	21.28
n41	90	30	2592.99	DFT	QPSK	Outer_Full	24.95	22.85	23.75
n41	90	30	2592.99	DFT	16QAM	Inner_Full	24.83	22.73	23.63
n41	90	30	2592.99	DFT	16QAM	Edge_1RB_Left	21.96	19.86	20.76
n41	90	30	2592.99	DFT	16QAM	Edge_1RB_Right	22.31	20.21	21.11
n41	90	30	2592.99	DFT	16QAM	Outer_Full	23.91	21.81	22.71
n41	90	30	2592.99	DFT	64QAM	Inner_Full	23.36	21.26	22.16
n41	90	30	2592.99	DFT	64QAM	Edge_1RB_Left	21.82	19.72	20.62
n41	90	30	2592.99	DFT	64QAM	Edge_1RB_Right	22.26	20.16	21.06
n41	90	30	2592.99	DFT	64QAM	Outer_Full	23.41	21.31	22.21
n41	90	30	2592.99	DFT	256QAM	Inner_Full	21.25	19.15	20.05
n41	90	30	2592.99	DFT	256QAM	Edge_1RB_Left	21.05	18.95	19.85



BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n41	90	30	2592.99	DFT	256QAM	Edge_1RB_Right	21.35	19.25	20.15
n41	90	30	2592.99	DFT	256QAM	Outer_Full	21.35	19.25	20.15
n41	90	30	2592.99	CP	QPSK	Inner_Full	24.37	22.27	23.17
n41	90	30	2592.99	CP	QPSK	Edge_1RB_Left	22.25	20.15	21.05
n41	90	30	2592.99	CP	QPSK	Edge_1RB_Right	22.58	20.48	21.38
n41	90	30	2592.99	CP	QPSK	Outer_Full	21.81	19.71	20.61
n41	90	30	2592.99	CP	16QAM	Inner_Full	23.87	21.77	22.67
n41	90	30	2592.99	CP	16QAM	Edge_1RB_Left	22.09	19.99	20.89
n41	90	30	2592.99	CP	16QAM	Edge_1RB_Right	22.49	20.39	21.29
n41	90	30	2592.99	CP	16QAM	Outer_Full	21.85	19.75	20.65
n41	90	30	2592.99	CP	64QAM	Inner_Full	22.30	20.20	21.10
n41	90	30	2592.99	CP	64QAM	Edge_1RB_Left	21.98	19.88	20.78
n41	90	30	2592.99	CP	64QAM	Edge_1RB_Right	22.40	20.30	21.20
n41	90	30	2592.99	CP	64QAM	Outer_Full	22.36	20.26	21.16
n41	90	30	2592.99	CP	256QAM	Inner_Full	19.27	17.17	18.07
n41	90	30	2592.99	CP	256QAM	Edge_1RB_Left	18.99	16.89	17.79
n41	90	30	2592.99	CP	256QAM	Edge_1RB_Right	19.29	17.19	18.09
n41	90	30	2592.99	CP	256QAM	Outer_Full	19.35	17.25	18.15
n41	90	30	2644.98	DFT	QPSK	Inner_Full	25.90	23.80	24.70
n41	90	30	2644.98	DFT	QPSK	Edge_1RB_Left	21.91	19.81	20.71
n41	90	30	2644.98	DFT	QPSK	Edge_1RB_Right	22.62	20.52	21.42
n41	90	30	2644.98	DFT	QPSK	Outer_Full	24.93	22.83	23.73
n41	90	30	2644.98	DFT	16QAM	Inner_Full	24.79	22.69	23.59
n41	90	30	2644.98	DFT	16QAM	Edge_1RB_Left	21.79	19.69	20.59
n41	90	30	2644.98	DFT	16QAM	Edge_1RB_Right	22.41	20.31	21.21
n41	90	30	2644.98	DFT	16QAM	Outer_Full	23.83	21.73	22.63
n41	90	30	2644.98	DFT	64QAM	Inner_Full	23.31	21.21	22.11
n41	90	30	2644.98	DFT	64QAM	Edge_1RB_Left	21.59	19.49	20.39
n41	90	30	2644.98	DFT	64QAM	Edge_1RB_Right	22.24	20.14	21.04
n41	90	30	2644.98	DFT	64QAM	Outer_Full	23.32	21.22	22.12



BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n41	90	30	2644.98	DFT	256QAM	Inner_Full	21.32	19.22	20.12
n41	90	30	2644.98	DFT	256QAM	Edge_1RB_Left	20.84	18.74	19.64
n41	90	30	2644.98	DFT	256QAM	Edge_1RB_Right	21.49	19.39	20.29
n41	90	30	2644.98	DFT	256QAM	Outer_Full	21.29	19.19	20.09
n41	90	30	2644.98	CP	QPSK	Inner_Full	24.47	22.37	23.27
n41	90	30	2644.98	CP	QPSK	Edge_1RB_Left	21.95	19.85	20.75
n41	90	30	2644.98	CP	QPSK	Edge_1RB_Right	22.67	20.57	21.47
n41	90	30	2644.98	CP	QPSK	Outer_Full	21.81	19.71	20.61
n41	90	30	2644.98	CP	16QAM	Inner_Full	23.84	21.74	22.64
n41	90	30	2644.98	CP	16QAM	Edge_1RB_Left	21.93	19.83	20.73
n41	90	30	2644.98	CP	16QAM	Edge_1RB_Right	22.43	20.33	21.23
n41	90	30	2644.98	CP	16QAM	Outer_Full	21.83	19.73	20.63
n41	90	30	2644.98	CP	64QAM	Inner_Full	22.25	20.15	21.05
n41	90	30	2644.98	CP	64QAM	Edge_1RB_Left	21.69	19.59	20.49
n41	90	30	2644.98	CP	64QAM	Edge_1RB_Right	22.35	20.25	21.15
n41	90	30	2644.98	CP	64QAM	Outer_Full	22.28	20.18	21.08
n41	90	30	2644.98	CP	256QAM	Inner_Full	19.27	17.17	18.07
n41	90	30	2644.98	CP	256QAM	Edge_1RB_Left	18.74	16.64	17.54
n41	90	30	2644.98	CP	256QAM	Edge_1RB_Right	19.44	17.34	18.24
n41	90	30	2644.98	CP	256QAM	Outer_Full	19.29	17.19	18.09
n41	100	30	2546.01	DFT	QPSK	Inner_Full	25.77	23.67	24.57
n41	100	30	2546.01	DFT	QPSK	Edge_1RB_Left	22.18	20.08	20.98
n41	100	30	2546.01	DFT	QPSK	Edge_1RB_Right	22.27	20.17	21.07
n41	100	30	2546.01	DFT	QPSK	Outer_Full	24.82	22.72	23.62
n41	100	30	2546.01	DFT	16QAM	Inner_Full	24.72	22.62	23.52
n41	100	30	2546.01	DFT	16QAM	Edge_1RB_Left	21.93	19.83	20.73
n41	100	30	2546.01	DFT	16QAM	Edge_1RB_Right	22.09	19.99	20.89
n41	100	30	2546.01	DFT	16QAM	Outer_Full	23.84	21.74	22.64
n41	100	30	2546.01	DFT	64QAM	Inner_Full	23.37	21.27	22.17
n41	100	30	2546.01	DFT	64QAM	Edge_1RB_Left	21.85	19.75	20.65



BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n41	100	30	2546.01	DFT	64QAM	Edge_1RB_Right	21.94	19.84	20.74
n41	100	30	2546.01	DFT	64QAM	Outer_Full	23.32	21.22	22.12
n41	100	30	2546.01	DFT	256QAM	Inner_Full	21.29	19.19	20.09
n41	100	30	2546.01	DFT	256QAM	Edge_1RB_Left	21.08	18.98	19.88
n41	100	30	2546.01	DFT	256QAM	Edge_1RB_Right	21.16	19.06	19.96
n41	100	30	2546.01	DFT	256QAM	Outer_Full	21.21	19.11	20.01
n41	100	30	2546.01	CP	QPSK	Inner_Full	24.24	22.14	23.04
n41	100	30	2546.01	CP	QPSK	Edge_1RB_Left	22.21	20.11	21.01
n41	100	30	2546.01	CP	QPSK	Edge_1RB_Right	22.34	20.24	21.14
n41	100	30	2546.01	CP	QPSK	Outer_Full	21.78	19.68	20.58
n41	100	30	2546.01	CP	16QAM	Inner_Full	23.93	21.83	22.73
n41	100	30	2546.01	CP	16QAM	Edge_1RB_Left	22.14	20.04	20.94
n41	100	30	2546.01	CP	16QAM	Edge_1RB_Right	22.21	20.11	21.01
n41	100	30	2546.01	CP	16QAM	Outer_Full	21.75	19.65	20.55
n41	100	30	2546.01	CP	64QAM	Inner_Full	22.36	20.26	21.16
n41	100	30	2546.01	CP	64QAM	Edge_1RB_Left	21.96	19.86	20.76
n41	100	30	2546.01	CP	64QAM	Edge_1RB_Right	22.04	19.94	20.84
n41	100	30	2546.01	CP	64QAM	Outer_Full	22.38	20.28	21.18
n41	100	30	2546.01	CP	256QAM	Inner_Full	19.34	17.24	18.14
n41	100	30	2546.01	CP	256QAM	Edge_1RB_Left	18.93	16.83	17.73
n41	100	30	2546.01	CP	256QAM	Edge_1RB_Right	19.10	17.00	17.90
n41	100	30	2546.01	CP	256QAM	Outer_Full	19.40	17.30	18.20
n41	100	30	2592.99	DFT	QPSK	Inner_Full	25.82	23.72	24.62
n41	100	30	2592.99	DFT	QPSK	Edge_1RB_Left	22.21	20.11	21.01
n41	100	30	2592.99	DFT	QPSK	Edge_1RB_Right	22.63	20.53	21.43
n41	100	30	2592.99	DFT	QPSK	Outer_Full	24.90	22.80	23.70
n41	100	30	2592.99	DFT	16QAM	Inner_Full	24.81	22.71	23.61
n41	100	30	2592.99	DFT	16QAM	Edge_1RB_Left	21.99	19.89	20.79
n41	100	30	2592.99	DFT	16QAM	Edge_1RB_Right	22.30	20.20	21.10
n41	100	30	2592.99	DFT	16QAM	Outer_Full	23.89	21.79	22.69



BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n41	100	30	2592.99	DFT	64QAM	Inner_Full	23.34	21.24	22.14
n41	100	30	2592.99	DFT	64QAM	Edge_1RB_Left	21.93	19.83	20.73
n41	100	30	2592.99	DFT	64QAM	Edge_1RB_Right	22.22	20.12	21.02
n41	100	30	2592.99	DFT	64QAM	Outer_Full	23.37	21.27	22.17
n41	100	30	2592.99	DFT	256QAM	Inner_Full	21.31	19.21	20.11
n41	100	30	2592.99	DFT	256QAM	Edge_1RB_Left	21.11	19.01	19.91
n41	100	30	2592.99	DFT	256QAM	Edge_1RB_Right	21.38	19.28	20.18
n41	100	30	2592.99	DFT	256QAM	Outer_Full	21.35	19.25	20.15
n41	100	30	2592.99	CP	QPSK	Inner_Full	24.37	22.27	23.17
n41	100	30	2592.99	CP	QPSK	Edge_1RB_Left	22.32	20.22	21.12
n41	100	30	2592.99	CP	QPSK	Edge_1RB_Right	22.48	20.38	21.28
n41	100	30	2592.99	CP	QPSK	Outer_Full	21.85	19.75	20.65
n41	100	30	2592.99	CP	16QAM	Inner_Full	23.86	21.76	22.66
n41	100	30	2592.99	CP	16QAM	Edge_1RB_Left	22.13	20.03	20.93
n41	100	30	2592.99	CP	16QAM	Edge_1RB_Right	22.53	20.43	21.33
n41	100	30	2592.99	CP	16QAM	Outer_Full	21.84	19.74	20.64
n41	100	30	2592.99	CP	64QAM	Inner_Full	22.30	20.20	21.10
n41	100	30	2592.99	CP	64QAM	Edge_1RB_Left	22.05	19.95	20.85
n41	100	30	2592.99	CP	64QAM	Edge_1RB_Right	22.24	20.14	21.04
n41	100	30	2592.99	CP	64QAM	Outer_Full	22.36	20.26	21.16
n41	100	30	2592.99	CP	256QAM	Inner_Full	19.30	17.20	18.10
n41	100	30	2592.99	CP	256QAM	Edge_1RB_Left	19.01	16.91	17.81
n41	100	30	2592.99	CP	256QAM	Edge_1RB_Right	19.34	17.24	18.14
n41	100	30	2592.99	CP	256QAM	Outer_Full	19.32	17.22	18.12
n41	100	30	2640	DFT	QPSK	Inner_Full	25.85	23.75	24.65
n41	100	30	2640	DFT	QPSK	Edge_1RB_Left	21.90	19.80	20.70
n41	100	30	2640	DFT	QPSK	Edge_1RB_Right	22.66	20.56	21.46
n41	100	30	2640	DFT	QPSK	Outer_Full	24.89	22.79	23.69
n41	100	30	2640	DFT	16QAM	Inner_Full	24.79	22.69	23.59
n41	100	30	2640	DFT	16QAM	Edge_1RB_Left	21.72	19.62	20.52



BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n41	100	30	2640	DFT	16QAM	Edge_1RB_Right	22.46	20.36	21.26
n41	100	30	2640	DFT	16QAM	Outer_Full	23.84	21.74	22.64
n41	100	30	2640	DFT	64QAM	Inner_Full	23.34	21.24	22.14
n41	100	30	2640	DFT	64QAM	Edge_1RB_Left	21.58	19.48	20.38
n41	100	30	2640	DFT	64QAM	Edge_1RB_Right	22.31	20.21	21.11
n41	100	30	2640	DFT	64QAM	Outer_Full	23.34	21.24	22.14
n41	100	30	2640	DFT	256QAM	Inner_Full	21.32	19.22	20.12
n41	100	30	2640	DFT	256QAM	Edge_1RB_Left	20.78	18.68	19.58
n41	100	30	2640	DFT	256QAM	Edge_1RB_Right	21.56	19.46	20.36
n41	100	30	2640	DFT	256QAM	Outer_Full	21.27	19.17	20.07
n41	100	30	2640	CP	QPSK	Inner_Full	24.35	22.25	23.15
n41	100	30	2640	CP	QPSK	Edge_1RB_Left	21.94	19.84	20.74
n41	100	30	2640	CP	QPSK	Edge_1RB_Right	22.68	20.58	21.48
n41	100	30	2640	CP	QPSK	Outer_Full	21.77	19.67	20.57
n41	100	30	2640	CP	16QAM	Inner_Full	23.91	21.81	22.71
n41	100	30	2640	CP	16QAM	Edge_1RB_Left	21.87	19.77	20.67
n41	100	30	2640	CP	16QAM	Edge_1RB_Right	22.57	20.47	21.37
n41	100	30	2640	CP	16QAM	Outer_Full	21.79	19.69	20.59
n41	100	30	2640	CP	64QAM	Inner_Full	22.42	20.32	21.22
n41	100	30	2640	CP	64QAM	Edge_1RB_Left	21.70	19.60	20.50
n41	100	30	2640	CP	64QAM	Edge_1RB_Right	22.39	20.29	21.19
n41	100	30	2640	CP	64QAM	Outer_Full	22.27	20.17	21.07
n41	100	30	2640	CP	256QAM	Inner_Full	19.29	17.19	18.09
n41	100	30	2640	CP	256QAM	Edge_1RB_Left	18.75	16.65	17.55
n41	100	30	2640	CP	256QAM	Edge_1RB_Right	19.49	17.39	18.29
n41	100	30	2640	CP	256QAM	Outer_Full	19.29	17.19	18.09



n66

BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n66	5	15	1712.5	DFT	QPSK	Inner_Full	24.11	22.51	22.21
n66	5	15	1712.5	DFT	QPSK	Edge_1RB_Left	21.91	20.31	20.01
n66	5	15	1712.5	DFT	QPSK	Edge_1RB_Right	21.94	20.34	20.04
n66	5	15	1712.5	DFT	QPSK	Outer_Full	23.55	21.95	21.65
n66	5	15	1712.5	DFT	16QAM	Inner_Full	23.74	22.14	21.84
n66	5	15	1712.5	DFT	16QAM	Edge_1RB_Left	22.20	20.60	20.30
n66	5	15	1712.5	DFT	16QAM	Edge_1RB_Right	22.28	20.68	20.38
n66	5	15	1712.5	DFT	16QAM	Outer_Full	22.56	20.96	20.66
n66	5	15	1712.5	DFT	64QAM	Inner_Full	22.21	20.61	20.31
n66	5	15	1712.5	DFT	64QAM	Edge_1RB_Left	21.31	19.71	19.41
n66	5	15	1712.5	DFT	64QAM	Edge_1RB_Right	21.38	19.78	19.48
n66	5	15	1712.5	DFT	64QAM	Outer_Full	22.21	20.61	20.31
n66	5	15	1712.5	DFT	256QAM	Inner_Full	20.73	19.13	18.83
n66	5	15	1712.5	DFT	256QAM	Edge_1RB_Left	19.15	17.55	17.25
n66	5	15	1712.5	DFT	256QAM	Edge_1RB_Right	19.18	17.58	17.28
n66	5	15	1712.5	DFT	256QAM	Outer_Full	20.59	18.99	18.69
n66	5	15	1712.5	CP	QPSK	Inner_Full	23.05	21.45	21.15
n66	5	15	1712.5	CP	QPSK	Edge_1RB_Left	20.97	19.37	19.07
n66	5	15	1712.5	CP	QPSK	Edge_1RB_Right	21.04	19.44	19.14
n66	5	15	1712.5	CP	QPSK	Outer_Full	22.01	20.41	20.11
n66	5	15	1712.5	CP	16QAM	Inner_Full	22.65	21.05	20.75
n66	5	15	1712.5	CP	16QAM	Edge_1RB_Left	21.46	19.86	19.56
n66	5	15	1712.5	CP	16QAM	Edge_1RB_Right	21.50	19.90	19.60
n66	5	15	1712.5	CP	16QAM	Outer_Full	21.98	20.38	20.08
n66	5	15	1712.5	CP	64QAM	Inner_Full	22.03	20.43	20.13
n66	5	15	1712.5	CP	64QAM	Edge_1RB_Left	20.23	18.63	18.33
n66	5	15	1712.5	CP	64QAM	Edge_1RB_Right	20.26	18.66	18.36
n66	5	15	1712.5	CP	64QAM	Outer_Full	22.06	20.46	20.16



BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n66	5	15	1712.5	CP	256QAM	Inner_Full	19.76	18.16	17.86
n66	5	15	1712.5	CP	256QAM	Edge_1RB_Left	17.26	15.66	15.36
n66	5	15	1712.5	CP	256QAM	Edge_1RB_Right	17.25	15.65	15.35
n66	5	15	1712.5	CP	256QAM	Outer_Full	19.62	18.02	17.72
n66	5	15	1745	DFT	QPSK	Inner_Full	24.24	22.64	22.34
n66	5	15	1745	DFT	QPSK	Edge_1RB_Left	21.98	20.38	20.08
n66	5	15	1745	DFT	QPSK	Edge_1RB_Right	22.02	20.42	20.12
n66	5	15	1745	DFT	QPSK	Outer_Full	23.68	22.08	21.78
n66	5	15	1745	DFT	16QAM	Inner_Full	23.75	22.15	21.85
n66	5	15	1745	DFT	16QAM	Edge_1RB_Left	22.09	20.49	20.19
n66	5	15	1745	DFT	16QAM	Edge_1RB_Right	22.22	20.62	20.32
n66	5	15	1745	DFT	16QAM	Outer_Full	22.79	21.19	20.89
n66	5	15	1745	DFT	64QAM	Inner_Full	22.50	20.90	20.60
n66	5	15	1745	DFT	64QAM	Edge_1RB_Left	21.18	19.58	19.28
n66	5	15	1745	DFT	64QAM	Edge_1RB_Right	21.28	19.68	19.38
n66	5	15	1745	DFT	64QAM	Outer_Full	22.35	20.75	20.45
n66	5	15	1745	DFT	256QAM	Inner_Full	20.91	19.31	19.01
n66	5	15	1745	DFT	256QAM	Edge_1RB_Left	19.14	17.54	17.24
n66	5	15	1745	DFT	256QAM	Edge_1RB_Right	19.30	17.70	17.40
n66	5	15	1745	DFT	256QAM	Outer_Full	20.75	19.15	18.85
n66	5	15	1745	CP	QPSK	Inner_Full	23.23	21.63	21.33
n66	5	15	1745	CP	QPSK	Edge_1RB_Left	20.99	19.39	19.09
n66	5	15	1745	CP	QPSK	Edge_1RB_Right	21.07	19.47	19.17
n66	5	15	1745	CP	QPSK	Outer_Full	22.17	20.57	20.27
n66	5	15	1745	CP	16QAM	Inner_Full	22.86	21.26	20.96
n66	5	15	1745	CP	16QAM	Edge_1RB_Left	21.33	19.73	19.43
n66	5	15	1745	CP	16QAM	Edge_1RB_Right	21.43	19.83	19.53
n66	5	15	1745	CP	16QAM	Outer_Full	22.14	20.54	20.24
n66	5	15	1745	CP	64QAM	Inner_Full	22.33	20.73	20.43
n66	5	15	1745	CP	64QAM	Edge_1RB_Left	20.09	18.49	18.19



BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n66	5	15	1745	CP	64QAM	Edge_1RB_Right	20.19	18.59	18.29
n66	5	15	1745	CP	64QAM	Outer_Full	22.22	20.62	20.32
n66	5	15	1745	CP	256QAM	Inner_Full	19.80	18.20	17.90
n66	5	15	1745	CP	256QAM	Edge_1RB_Left	17.16	15.56	15.26
n66	5	15	1745	CP	256QAM	Edge_1RB_Right	17.28	15.68	15.38
n66	5	15	1745	CP	256QAM	Outer_Full	19.71	18.11	17.81
n66	5	15	1777.5	DFT	QPSK	Inner_Full	24.05	22.45	22.15
n66	5	15	1777.5	DFT	QPSK	Edge_1RB_Left	21.94	20.34	20.04
n66	5	15	1777.5	DFT	QPSK	Edge_1RB_Right	21.99	20.39	20.09
n66	5	15	1777.5	DFT	QPSK	Outer_Full	23.10	21.50	21.20
n66	5	15	1777.5	DFT	16QAM	Inner_Full	23.24	21.64	21.34
n66	5	15	1777.5	DFT	16QAM	Edge_1RB_Left	22.27	20.67	20.37
n66	5	15	1777.5	DFT	16QAM	Edge_1RB_Right	22.25	20.65	20.35
n66	5	15	1777.5	DFT	16QAM	Outer_Full	22.19	20.59	20.29
n66	5	15	1777.5	DFT	64QAM	Inner_Full	21.92	20.32	20.02
n66	5	15	1777.5	DFT	64QAM	Edge_1RB_Left	21.19	19.59	19.29
n66	5	15	1777.5	DFT	64QAM	Edge_1RB_Right	21.39	19.79	19.49
n66	5	15	1777.5	DFT	64QAM	Outer_Full	21.78	20.18	19.88
n66	5	15	1777.5	DFT	256QAM	Inner_Full	20.41	18.81	18.51
n66	5	15	1777.5	DFT	256QAM	Edge_1RB_Left	19.19	17.59	17.29
n66	5	15	1777.5	DFT	256QAM	Edge_1RB_Right	19.16	17.56	17.26
n66	5	15	1777.5	DFT	256QAM	Outer_Full	20.22	18.62	18.32
n66	5	15	1777.5	CP	QPSK	Inner_Full	22.69	21.09	20.79
n66	5	15	1777.5	CP	QPSK	Edge_1RB_Left	21.02	19.42	19.12
n66	5	15	1777.5	CP	QPSK	Edge_1RB_Right	21.02	19.42	19.12
n66	5	15	1777.5	CP	QPSK	Outer_Full	21.62	20.02	19.72
n66	5	15	1777.5	CP	16QAM	Inner_Full	22.36	20.76	20.46
n66	5	15	1777.5	CP	16QAM	Edge_1RB_Left	21.44	19.84	19.54
n66	5	15	1777.5	CP	16QAM	Edge_1RB_Right	21.44	19.84	19.54
n66	5	15	1777.5	CP	16QAM	Outer_Full	21.58	19.98	19.68



BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n66	5	15	1777.5	CP	64QAM	Inner_Full	21.75	20.15	19.85
n66	5	15	1777.5	CP	64QAM	Edge_1RB_Left	20.18	18.58	18.28
n66	5	15	1777.5	CP	64QAM	Edge_1RB_Right	20.17	18.57	18.27
n66	5	15	1777.5	CP	64QAM	Outer_Full	21.67	20.07	19.77
n66	5	15	1777.5	CP	256QAM	Inner_Full	19.33	17.73	17.43
n66	5	15	1777.5	CP	256QAM	Edge_1RB_Left	17.19	15.59	15.29
n66	5	15	1777.5	CP	256QAM	Edge_1RB_Right	17.23	15.63	15.33
n66	5	15	1777.5	CP	256QAM	Outer_Full	19.27	17.67	17.37
n66	10	15	1715	DFT	QPSK	Inner_Full	24.11	22.51	22.21
n66	10	15	1715	DFT	QPSK	Edge_1RB_Left	22.02	20.42	20.12
n66	10	15	1715	DFT	QPSK	Edge_1RB_Right	22.00	20.40	20.10
n66	10	15	1715	DFT	QPSK	Outer_Full	23.51	21.91	21.61
n66	10	15	1715	DFT	16QAM	Inner_Full	23.54	21.94	21.64
n66	10	15	1715	DFT	16QAM	Edge_1RB_Left	22.19	20.59	20.29
n66	10	15	1715	DFT	16QAM	Edge_1RB_Right	22.26	20.66	20.36
n66	10	15	1715	DFT	16QAM	Outer_Full	22.54	20.94	20.64
n66	10	15	1715	DFT	64QAM	Inner_Full	22.27	20.67	20.37
n66	10	15	1715	DFT	64QAM	Edge_1RB_Left	21.31	19.71	19.41
n66	10	15	1715	DFT	64QAM	Edge_1RB_Right	21.38	19.78	19.48
n66	10	15	1715	DFT	64QAM	Outer_Full	22.08	20.48	20.18
n66	10	15	1715	DFT	256QAM	Inner_Full	20.59	18.99	18.69
n66	10	15	1715	DFT	256QAM	Edge_1RB_Left	19.18	17.58	17.28
n66	10	15	1715	DFT	256QAM	Edge_1RB_Right	19.19	17.59	17.29
n66	10	15	1715	DFT	256QAM	Outer_Full	20.58	18.98	18.68
n66	10	15	1715	CP	QPSK	Inner_Full	23.01	21.41	21.11
n66	10	15	1715	CP	QPSK	Edge_1RB_Left	21.02	19.42	19.12
n66	10	15	1715	CP	QPSK	Edge_1RB_Right	20.98	19.38	19.08
n66	10	15	1715	CP	QPSK	Outer_Full	21.98	20.38	20.08
n66	10	15	1715	CP	16QAM	Inner_Full	22.56	20.96	20.66
n66	10	15	1715	CP	16QAM	Edge_1RB_Left	21.35	19.75	19.45



BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n66	10	15	1715	CP	16QAM	Edge_1RB_Right	21.41	19.81	19.51
n66	10	15	1715	CP	16QAM	Outer_Full	21.91	20.31	20.01
n66	10	15	1715	CP	64QAM	Inner_Full	22.09	20.49	20.19
n66	10	15	1715	CP	64QAM	Edge_1RB_Left	20.08	18.48	18.18
n66	10	15	1715	CP	64QAM	Edge_1RB_Right	20.20	18.60	18.30
n66	10	15	1715	CP	64QAM	Outer_Full	22.02	20.42	20.12
n66	10	15	1715	CP	256QAM	Inner_Full	19.60	18.00	17.70
n66	10	15	1715	CP	256QAM	Edge_1RB_Left	17.27	15.67	15.37
n66	10	15	1715	CP	256QAM	Edge_1RB_Right	17.27	15.67	15.37
n66	10	15	1715	CP	256QAM	Outer_Full	19.55	17.95	17.65
n66	10	15	1745	DFT	QPSK	Inner_Full	24.17	22.57	22.27
n66	10	15	1745	DFT	QPSK	Edge_1RB_Left	21.91	20.31	20.01
n66	10	15	1745	DFT	QPSK	Edge_1RB_Right	22.01	20.41	20.11
n66	10	15	1745	DFT	QPSK	Outer_Full	23.58	21.98	21.68
n66	10	15	1745	DFT	16QAM	Inner_Full	23.74	22.14	21.84
n66	10	15	1745	DFT	16QAM	Edge_1RB_Left	22.18	20.58	20.28
n66	10	15	1745	DFT	16QAM	Edge_1RB_Right	22.25	20.65	20.35
n66	10	15	1745	DFT	16QAM	Outer_Full	22.74	21.14	20.84
n66	10	15	1745	DFT	64QAM	Inner_Full	22.50	20.90	20.60
n66	10	15	1745	DFT	64QAM	Edge_1RB_Left	21.29	19.69	19.39
n66	10	15	1745	DFT	64QAM	Edge_1RB_Right	21.36	19.76	19.46
n66	10	15	1745	DFT	64QAM	Outer_Full	22.22	20.62	20.32
n66	10	15	1745	DFT	256QAM	Inner_Full	20.65	19.05	18.75
n66	10	15	1745	DFT	256QAM	Edge_1RB_Left	19.13	17.53	17.23
n66	10	15	1745	DFT	256QAM	Edge_1RB_Right	19.20	17.60	17.30
n66	10	15	1745	DFT	256QAM	Outer_Full	20.65	19.05	18.75
n66	10	15	1745	CP	QPSK	Inner_Full	23.24	21.64	21.34
n66	10	15	1745	CP	QPSK	Edge_1RB_Left	20.94	19.34	19.04
n66	10	15	1745	CP	QPSK	Edge_1RB_Right	21.01	19.41	19.11
n66	10	15	1745	CP	QPSK	Outer_Full	22.15	20.55	20.25



BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n66	10	15	1745	CP	16QAM	Inner_Full	22.72	21.12	20.82
n66	10	15	1745	CP	16QAM	Edge_1RB_Left	21.34	19.74	19.44
n66	10	15	1745	CP	16QAM	Edge_1RB_Right	21.43	19.83	19.53
n66	10	15	1745	CP	16QAM	Outer_Full	22.20	20.60	20.30
n66	10	15	1745	CP	64QAM	Inner_Full	22.49	20.89	20.59
n66	10	15	1745	CP	64QAM	Edge_1RB_Left	20.13	18.53	18.23
n66	10	15	1745	CP	64QAM	Edge_1RB_Right	20.08	18.48	18.18
n66	10	15	1745	CP	64QAM	Outer_Full	22.25	20.65	20.35
n66	10	15	1745	CP	256QAM	Inner_Full	19.73	18.13	17.83
n66	10	15	1745	CP	256QAM	Edge_1RB_Left	17.23	15.63	15.33
n66	10	15	1745	CP	256QAM	Edge_1RB_Right	17.30	15.70	15.40
n66	10	15	1745	CP	256QAM	Outer_Full	19.64	18.04	17.74
n66	10	15	1775	DFT	QPSK	Inner_Full	24.15	22.55	22.25
n66	10	15	1775	DFT	QPSK	Edge_1RB_Left	21.90	20.30	20.00
n66	10	15	1775	DFT	QPSK	Edge_1RB_Right	22.03	20.43	20.13
n66	10	15	1775	DFT	QPSK	Outer_Full	23.30	21.70	21.40
n66	10	15	1775	DFT	16QAM	Inner_Full	23.44	21.84	21.54
n66	10	15	1775	DFT	16QAM	Edge_1RB_Left	22.21	20.61	20.31
n66	10	15	1775	DFT	16QAM	Edge_1RB_Right	22.26	20.66	20.36
n66	10	15	1775	DFT	16QAM	Outer_Full	22.33	20.73	20.43
n66	10	15	1775	DFT	64QAM	Inner_Full	22.06	20.46	20.16
n66	10	15	1775	DFT	64QAM	Edge_1RB_Left	21.35	19.75	19.45
n66	10	15	1775	DFT	64QAM	Edge_1RB_Right	21.41	19.81	19.51
n66	10	15	1775	DFT	64QAM	Outer_Full	21.88	20.28	19.98
n66	10	15	1775	DFT	256QAM	Inner_Full	20.45	18.85	18.55
n66	10	15	1775	DFT	256QAM	Edge_1RB_Left	19.15	17.55	17.25
n66	10	15	1775	DFT	256QAM	Edge_1RB_Right	19.19	17.59	17.29
n66	10	15	1775	DFT	256QAM	Outer_Full	20.41	18.81	18.51
n66	10	15	1775	CP	QPSK	Inner_Full	22.88	21.28	20.98
n66	10	15	1775	CP	QPSK	Edge_1RB_Left	21.02	19.42	19.12



BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n66	10	15	1775	CP	QPSK	Edge_1RB_Right	21.05	19.45	19.15
n66	10	15	1775	CP	QPSK	Outer_Full	21.78	20.18	19.88
n66	10	15	1775	CP	16QAM	Inner_Full	22.40	20.80	20.50
n66	10	15	1775	CP	16QAM	Edge_1RB_Left	21.32	19.72	19.42
n66	10	15	1775	CP	16QAM	Edge_1RB_Right	21.45	19.85	19.55
n66	10	15	1775	CP	16QAM	Outer_Full	21.69	20.09	19.79
n66	10	15	1775	CP	64QAM	Inner_Full	21.92	20.32	20.02
n66	10	15	1775	CP	64QAM	Edge_1RB_Left	20.14	18.54	18.24
n66	10	15	1775	CP	64QAM	Edge_1RB_Right	20.20	18.60	18.30
n66	10	15	1775	CP	64QAM	Outer_Full	21.81	20.21	19.91
n66	10	15	1775	CP	256QAM	Inner_Full	19.45	17.85	17.55
n66	10	15	1775	CP	256QAM	Edge_1RB_Left	17.31	15.71	15.41
n66	10	15	1775	CP	256QAM	Edge_1RB_Right	17.20	15.60	15.30
n66	10	15	1775	CP	256QAM	Outer_Full	19.30	17.70	17.40
n66	15	15	1717.5	DFT	QPSK	Inner_Full	24.28	22.68	22.38
n66	15	15	1717.5	DFT	QPSK	Edge_1RB_Left	22.10	20.50	20.20
n66	15	15	1717.5	DFT	QPSK	Edge_1RB_Right	22.02	20.42	20.12
n66	15	15	1717.5	DFT	QPSK	Outer_Full	23.70	22.10	21.80
n66	15	15	1717.5	DFT	16QAM	Inner_Full	23.52	21.92	21.62
n66	15	15	1717.5	DFT	16QAM	Edge_1RB_Left	22.29	20.69	20.39
n66	15	15	1717.5	DFT	16QAM	Edge_1RB_Right	22.26	20.66	20.36
n66	15	15	1717.5	DFT	16QAM	Outer_Full	22.70	21.10	20.80
n66	15	15	1717.5	DFT	64QAM	Inner_Full	22.27	20.67	20.37
n66	15	15	1717.5	DFT	64QAM	Edge_1RB_Left	21.35	19.75	19.45
n66	15	15	1717.5	DFT	64QAM	Edge_1RB_Right	21.40	19.80	19.50
n66	15	15	1717.5	DFT	64QAM	Outer_Full	22.28	20.68	20.38
n66	15	15	1717.5	DFT	256QAM	Inner_Full	20.84	19.24	18.94
n66	15	15	1717.5	DFT	256QAM	Edge_1RB_Left	19.25	17.65	17.35
n66	15	15	1717.5	DFT	256QAM	Edge_1RB_Right	19.29	17.69	17.39
n66	15	15	1717.5	DFT	256QAM	Outer_Full	20.74	19.14	18.84



BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n66	15	15	1717.5	CP	QPSK	Inner_Full	22.98	21.38	21.08
n66	15	15	1717.5	CP	QPSK	Edge_1RB_Left	21.08	19.48	19.18
n66	15	15	1717.5	CP	QPSK	Edge_1RB_Right	21.15	19.55	19.25
n66	15	15	1717.5	CP	QPSK	Outer_Full	22.18	20.58	20.28
n66	15	15	1717.5	CP	16QAM	Inner_Full	22.56	20.96	20.66
n66	15	15	1717.5	CP	16QAM	Edge_1RB_Left	21.37	19.77	19.47
n66	15	15	1717.5	CP	16QAM	Edge_1RB_Right	21.46	19.86	19.56
n66	15	15	1717.5	CP	16QAM	Outer_Full	22.08	20.48	20.18
n66	15	15	1717.5	CP	64QAM	Inner_Full	22.14	20.54	20.24
n66	15	15	1717.5	CP	64QAM	Edge_1RB_Left	20.30	18.70	18.40
n66	15	15	1717.5	CP	64QAM	Edge_1RB_Right	20.36	18.76	18.46
n66	15	15	1717.5	CP	64QAM	Outer_Full	22.18	20.58	20.28
n66	15	15	1717.5	CP	256QAM	Inner_Full	19.80	18.20	17.90
n66	15	15	1717.5	CP	256QAM	Edge_1RB_Left	17.23	15.63	15.33
n66	15	15	1717.5	CP	256QAM	Edge_1RB_Right	17.30	15.70	15.40
n66	15	15	1717.5	CP	256QAM	Outer_Full	19.74	18.14	17.84
n66	15	15	1745	DFT	QPSK	Inner_Full	24.18	22.58	22.28
n66	15	15	1745	DFT	QPSK	Edge_1RB_Left	22.01	20.41	20.11
n66	15	15	1745	DFT	QPSK	Edge_1RB_Right	21.97	20.37	20.07
n66	15	15	1745	DFT	QPSK	Outer_Full	23.83	22.23	21.93
n66	15	15	1745	DFT	16QAM	Inner_Full	23.62	22.02	21.72
n66	15	15	1745	DFT	16QAM	Edge_1RB_Left	22.31	20.71	20.41
n66	15	15	1745	DFT	16QAM	Edge_1RB_Right	22.16	20.56	20.26
n66	15	15	1745	DFT	16QAM	Outer_Full	22.78	21.18	20.88
n66	15	15	1745	DFT	64QAM	Inner_Full	22.57	20.97	20.67
n66	15	15	1745	DFT	64QAM	Edge_1RB_Left	21.39	19.79	19.49
n66	15	15	1745	DFT	64QAM	Edge_1RB_Right	21.24	19.64	19.34
n66	15	15	1745	DFT	64QAM	Outer_Full	22.31	20.71	20.41
n66	15	15	1745	DFT	256QAM	Inner_Full	20.86	19.26	18.96
n66	15	15	1745	DFT	256QAM	Edge_1RB_Left	19.21	17.61	17.31



BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n66	15	15	1745	DFT	256QAM	Edge_1RB_Right	19.18	17.58	17.28
n66	15	15	1745	DFT	256QAM	Outer_Full	20.78	19.18	18.88
n66	15	15	1745	CP	QPSK	Inner_Full	23.16	21.56	21.26
n66	15	15	1745	CP	QPSK	Edge_1RB_Left	21.03	19.43	19.13
n66	15	15	1745	CP	QPSK	Edge_1RB_Right	21.01	19.41	19.11
n66	15	15	1745	CP	QPSK	Outer_Full	22.21	20.61	20.31
n66	15	15	1745	CP	16QAM	Inner_Full	22.85	21.25	20.95
n66	15	15	1745	CP	16QAM	Edge_1RB_Left	21.39	19.79	19.49
n66	15	15	1745	CP	16QAM	Edge_1RB_Right	21.47	19.87	19.57
n66	15	15	1745	CP	16QAM	Outer_Full	22.24	20.64	20.34
n66	15	15	1745	CP	64QAM	Inner_Full	22.30	20.70	20.40
n66	15	15	1745	CP	64QAM	Edge_1RB_Left	20.30	18.70	18.40
n66	15	15	1745	CP	64QAM	Edge_1RB_Right	20.37	18.77	18.47
n66	15	15	1745	CP	64QAM	Outer_Full	22.22	20.62	20.32
n66	15	15	1745	CP	256QAM	Inner_Full	19.81	18.21	17.91
n66	15	15	1745	CP	256QAM	Edge_1RB_Left	17.29	15.69	15.39
n66	15	15	1745	CP	256QAM	Edge_1RB_Right	17.29	15.69	15.39
n66	15	15	1745	CP	256QAM	Outer_Full	19.69	18.09	17.79
n66	15	15	1772.5	DFT	QPSK	Inner_Full	24.24	22.64	22.34
n66	15	15	1772.5	DFT	QPSK	Edge_1RB_Left	22.02	20.42	20.12
n66	15	15	1772.5	DFT	QPSK	Edge_1RB_Right	22.01	20.41	20.11
n66	15	15	1772.5	DFT	QPSK	Outer_Full	23.45	21.85	21.55
n66	15	15	1772.5	DFT	16QAM	Inner_Full	23.42	21.82	21.52
n66	15	15	1772.5	DFT	16QAM	Edge_1RB_Left	22.18	20.58	20.28
n66	15	15	1772.5	DFT	16QAM	Edge_1RB_Right	22.18	20.58	20.28
n66	15	15	1772.5	DFT	16QAM	Outer_Full	22.51	20.91	20.61
n66	15	15	1772.5	DFT	64QAM	Inner_Full	22.12	20.52	20.22
n66	15	15	1772.5	DFT	64QAM	Edge_1RB_Left	21.36	19.76	19.46
n66	15	15	1772.5	DFT	64QAM	Edge_1RB_Right	21.29	19.69	19.39
n66	15	15	1772.5	DFT	64QAM	Outer_Full	21.99	20.39	20.09



BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n66	15	15	1772.5	DFT	256QAM	Inner_Full	20.59	18.99	18.69
n66	15	15	1772.5	DFT	256QAM	Edge_1RB_Left	19.24	17.64	17.34
n66	15	15	1772.5	DFT	256QAM	Edge_1RB_Right	19.22	17.62	17.32
n66	15	15	1772.5	DFT	256QAM	Outer_Full	20.45	18.85	18.55
n66	15	15	1772.5	CP	QPSK	Inner_Full	22.87	21.27	20.97
n66	15	15	1772.5	CP	QPSK	Edge_1RB_Left	21.02	19.42	19.12
n66	15	15	1772.5	CP	QPSK	Edge_1RB_Right	21.06	19.46	19.16
n66	15	15	1772.5	CP	QPSK	Outer_Full	21.85	20.25	19.95
n66	15	15	1772.5	CP	16QAM	Inner_Full	22.42	20.82	20.52
n66	15	15	1772.5	CP	16QAM	Edge_1RB_Left	21.32	19.72	19.42
n66	15	15	1772.5	CP	16QAM	Edge_1RB_Right	21.33	19.73	19.43
n66	15	15	1772.5	CP	16QAM	Outer_Full	21.88	20.28	19.98
n66	15	15	1772.5	CP	64QAM	Inner_Full	22.02	20.42	20.12
n66	15	15	1772.5	CP	64QAM	Edge_1RB_Left	20.24	18.64	18.34
n66	15	15	1772.5	CP	64QAM	Edge_1RB_Right	20.27	18.67	18.37
n66	15	15	1772.5	CP	64QAM	Outer_Full	21.87	20.27	19.97
n66	15	15	1772.5	CP	256QAM	Inner_Full	19.57	17.97	17.67
n66	15	15	1772.5	CP	256QAM	Edge_1RB_Left	17.23	15.63	15.33
n66	15	15	1772.5	CP	256QAM	Edge_1RB_Right	17.21	15.61	15.31
n66	15	15	1772.5	CP	256QAM	Outer_Full	19.46	17.86	17.56
n66	20	15	1720	DFT	QPSK	Inner_Full	24.23	22.63	22.33
n66	20	15	1720	DFT	QPSK	Edge_1RB_Left	21.97	20.37	20.07
n66	20	15	1720	DFT	QPSK	Edge_1RB_Right	22.03	20.43	20.13
n66	20	15	1720	DFT	QPSK	Outer_Full	23.80	22.20	21.90
n66	20	15	1720	DFT	16QAM	Inner_Full	23.63	22.03	21.73
n66	20	15	1720	DFT	16QAM	Edge_1RB_Left	22.13	20.53	20.23
n66	20	15	1720	DFT	16QAM	Edge_1RB_Right	22.30	20.70	20.40
n66	20	15	1720	DFT	16QAM	Outer_Full	22.87	21.27	20.97
n66	20	15	1720	DFT	64QAM	Inner_Full	22.30	20.70	20.40
n66	20	15	1720	DFT	64QAM	Edge_1RB_Left	21.21	19.61	19.31



BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n66	20	15	1720	DFT	64QAM	Edge_1RB_Right	21.44	19.84	19.54
n66	20	15	1720	DFT	64QAM	Outer_Full	22.36	20.76	20.46
n66	20	15	1720	DFT	256QAM	Inner_Full	20.75	19.15	18.85
n66	20	15	1720	DFT	256QAM	Edge_1RB_Left	19.20	17.60	17.30
n66	20	15	1720	DFT	256QAM	Edge_1RB_Right	19.19	17.59	17.29
n66	20	15	1720	DFT	256QAM	Outer_Full	20.86	19.26	18.96
n66	20	15	1720	CP	QPSK	Inner_Full	23.13	21.53	21.23
n66	20	15	1720	CP	QPSK	Edge_1RB_Left	20.98	19.38	19.08
n66	20	15	1720	CP	QPSK	Edge_1RB_Right	21.13	19.53	19.23
n66	20	15	1720	CP	QPSK	Outer_Full	22.21	20.61	20.31
n66	20	15	1720	CP	16QAM	Inner_Full	22.64	21.04	20.74
n66	20	15	1720	CP	16QAM	Edge_1RB_Left	21.29	19.69	19.39
n66	20	15	1720	CP	16QAM	Edge_1RB_Right	21.49	19.89	19.59
n66	20	15	1720	CP	16QAM	Outer_Full	22.17	20.57	20.27
n66	20	15	1720	CP	64QAM	Inner_Full	22.41	20.81	20.51
n66	20	15	1720	CP	64QAM	Edge_1RB_Left	20.15	18.55	18.25
n66	20	15	1720	CP	64QAM	Edge_1RB_Right	20.37	18.77	18.47
n66	20	15	1720	CP	64QAM	Outer_Full	22.22	20.62	20.32
n66	20	15	1720	CP	256QAM	Inner_Full	19.88	18.28	17.98
n66	20	15	1720	CP	256QAM	Edge_1RB_Left	17.13	15.53	15.23
n66	20	15	1720	CP	256QAM	Edge_1RB_Right	17.42	15.82	15.52
n66	20	15	1720	CP	256QAM	Outer_Full	19.88	18.28	17.98
n66	20	15	1745	DFT	QPSK	Inner_Full	24.11	22.51	22.21
n66	20	15	1745	DFT	QPSK	Edge_1RB_Left	21.90	20.30	20.00
n66	20	15	1745	DFT	QPSK	Edge_1RB_Right	21.92	20.32	20.02
n66	20	15	1745	DFT	QPSK	Outer_Full	23.67	22.07	21.77
n66	20	15	1745	DFT	16QAM	Inner_Full	23.60	22.00	21.70
n66	20	15	1745	DFT	16QAM	Edge_1RB_Left	22.18	20.58	20.28
n66	20	15	1745	DFT	16QAM	Edge_1RB_Right	22.18	20.58	20.28
n66	20	15	1745	DFT	16QAM	Outer_Full	22.83	21.23	20.93



BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n66	20	15	1745	DFT	64QAM	Inner_Full	22.31	20.71	20.41
n66	20	15	1745	DFT	64QAM	Edge_1RB_Left	21.28	19.68	19.38
n66	20	15	1745	DFT	64QAM	Edge_1RB_Right	21.33	19.73	19.43
n66	20	15	1745	DFT	64QAM	Outer_Full	22.30	20.70	20.40
n66	20	15	1745	DFT	256QAM	Inner_Full	20.76	19.16	18.86
n66	20	15	1745	DFT	256QAM	Edge_1RB_Left	19.11	17.51	17.21
n66	20	15	1745	DFT	256QAM	Edge_1RB_Right	19.10	17.50	17.20
n66	20	15	1745	DFT	256QAM	Outer_Full	20.74	19.14	18.84
n66	20	15	1745	CP	QPSK	Inner_Full	23.16	21.56	21.26
n66	20	15	1745	CP	QPSK	Edge_1RB_Left	20.95	19.35	19.05
n66	20	15	1745	CP	QPSK	Edge_1RB_Right	21.01	19.41	19.11
n66	20	15	1745	CP	QPSK	Outer_Full	22.15	20.55	20.25
n66	20	15	1745	CP	16QAM	Inner_Full	22.79	21.19	20.89
n66	20	15	1745	CP	16QAM	Edge_1RB_Left	21.31	19.71	19.41
n66	20	15	1745	CP	16QAM	Edge_1RB_Right	21.42	19.82	19.52
n66	20	15	1745	CP	16QAM	Outer_Full	22.18	20.58	20.28
n66	20	15	1745	CP	64QAM	Inner_Full	22.32	20.72	20.42
n66	20	15	1745	CP	64QAM	Edge_1RB_Left	20.19	18.59	18.29
n66	20	15	1745	CP	64QAM	Edge_1RB_Right	20.33	18.73	18.43
n66	20	15	1745	CP	64QAM	Outer_Full	22.23	20.63	20.33
n66	20	15	1745	CP	256QAM	Inner_Full	19.80	18.20	17.90
n66	20	15	1745	CP	256QAM	Edge_1RB_Left	17.23	15.63	15.33
n66	20	15	1745	CP	256QAM	Edge_1RB_Right	17.27	15.67	15.37
n66	20	15	1745	CP	256QAM	Outer_Full	19.73	18.13	17.83
n66	20	15	1770	DFT	QPSK	Inner_Full	24.16	22.56	22.26
n66	20	15	1770	DFT	QPSK	Edge_1RB_Left	21.97	20.37	20.07
n66	20	15	1770	DFT	QPSK	Edge_1RB_Right	21.97	20.37	20.07
n66	20	15	1770	DFT	QPSK	Outer_Full	23.44	21.84	21.54
n66	20	15	1770	DFT	16QAM	Inner_Full	23.46	21.86	21.56
n66	20	15	1770	DFT	16QAM	Edge_1RB_Left	22.15	20.55	20.25



BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n66	20	15	1770	DFT	16QAM	Edge_1RB_Right	22.15	20.55	20.25
n66	20	15	1770	DFT	16QAM	Outer_Full	22.52	20.92	20.62
n66	20	15	1770	DFT	64QAM	Inner_Full	22.01	20.41	20.11
n66	20	15	1770	DFT	64QAM	Edge_1RB_Left	21.23	19.63	19.33
n66	20	15	1770	DFT	64QAM	Edge_1RB_Right	21.27	19.67	19.37
n66	20	15	1770	DFT	64QAM	Outer_Full	22.00	20.40	20.10
n66	20	15	1770	DFT	256QAM	Inner_Full	20.51	18.91	18.61
n66	20	15	1770	DFT	256QAM	Edge_1RB_Left	19.09	17.49	17.19
n66	20	15	1770	DFT	256QAM	Edge_1RB_Right	19.08	17.48	17.18
n66	20	15	1770	DFT	256QAM	Outer_Full	20.49	18.89	18.59
n66	20	15	1770	CP	QPSK	Inner_Full	22.83	21.23	20.93
n66	20	15	1770	CP	QPSK	Edge_1RB_Left	20.96	19.36	19.06
n66	20	15	1770	CP	QPSK	Edge_1RB_Right	20.95	19.35	19.05
n66	20	15	1770	CP	QPSK	Outer_Full	21.82	20.22	19.92
n66	20	15	1770	CP	16QAM	Inner_Full	22.31	20.71	20.41
n66	20	15	1770	CP	16QAM	Edge_1RB_Left	21.31	19.71	19.41
n66	20	15	1770	CP	16QAM	Edge_1RB_Right	21.36	19.76	19.46
n66	20	15	1770	CP	16QAM	Outer_Full	21.77	20.17	19.87
n66	20	15	1770	CP	64QAM	Inner_Full	22.03	20.43	20.13
n66	20	15	1770	CP	64QAM	Edge_1RB_Left	20.17	18.57	18.27
n66	20	15	1770	CP	64QAM	Edge_1RB_Right	20.31	18.71	18.41
n66	20	15	1770	CP	64QAM	Outer_Full	21.88	20.28	19.98
n66	20	15	1770	CP	256QAM	Inner_Full	19.54	17.94	17.64
n66	20	15	1770	CP	256QAM	Edge_1RB_Left	17.18	15.58	15.28
n66	20	15	1770	CP	256QAM	Edge_1RB_Right	17.28	15.68	15.38
n66	20	15	1770	CP	256QAM	Outer_Full	19.51	17.91	17.61
n66	25	15	1722.5	DFT	QPSK	Inner_Full	24.19	22.59	22.29
n66	25	15	1722.5	DFT	QPSK	Edge_1RB_Left	22.06	20.46	20.16
n66	25	15	1722.5	DFT	QPSK	Edge_1RB_Right	22.20	20.60	20.30
n66	25	15	1722.5	DFT	QPSK	Outer_Full	23.89	22.29	21.99



BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n66	25	15	1722.5	DFT	16QAM	Inner_Full	23.76	22.16	21.86
n66	25	15	1722.5	DFT	16QAM	Edge_1RB_Left	22.29	20.69	20.39
n66	25	15	1722.5	DFT	16QAM	Edge_1RB_Right	22.40	20.80	20.50
n66	25	15	1722.5	DFT	16QAM	Outer_Full	23.00	21.40	21.10
n66	25	15	1722.5	DFT	64QAM	Inner_Full	22.42	20.82	20.52
n66	25	15	1722.5	DFT	64QAM	Edge_1RB_Left	21.36	19.76	19.46
n66	25	15	1722.5	DFT	64QAM	Edge_1RB_Right	21.54	19.94	19.64
n66	25	15	1722.5	DFT	64QAM	Outer_Full	22.52	20.92	20.62
n66	25	15	1722.5	DFT	256QAM	Inner_Full	20.86	19.26	18.96
n66	25	15	1722.5	DFT	256QAM	Edge_1RB_Left	19.17	17.57	17.27
n66	25	15	1722.5	DFT	256QAM	Edge_1RB_Right	19.41	17.81	17.51
n66	25	15	1722.5	DFT	256QAM	Outer_Full	21.04	19.44	19.14
n66	25	15	1722.5	CP	QPSK	Inner_Full	23.17	21.57	21.27
n66	25	15	1722.5	CP	QPSK	Edge_1RB_Left	21.00	19.40	19.10
n66	25	15	1722.5	CP	QPSK	Edge_1RB_Right	21.23	19.63	19.33
n66	25	15	1722.5	CP	QPSK	Outer_Full	22.43	20.83	20.53
n66	25	15	1722.5	CP	16QAM	Inner_Full	22.79	21.19	20.89
n66	25	15	1722.5	CP	16QAM	Edge_1RB_Left	21.44	19.84	19.54
n66	25	15	1722.5	CP	16QAM	Edge_1RB_Right	21.58	19.98	19.68
n66	25	15	1722.5	CP	16QAM	Outer_Full	22.35	20.75	20.45
n66	25	15	1722.5	CP	64QAM	Inner_Full	22.40	20.80	20.50
n66	25	15	1722.5	CP	64QAM	Edge_1RB_Left	20.30	18.70	18.40
n66	25	15	1722.5	CP	64QAM	Edge_1RB_Right	20.48	18.88	18.58
n66	25	15	1722.5	CP	64QAM	Outer_Full	22.41	20.81	20.51
n66	25	15	1722.5	CP	256QAM	Inner_Full	20.05	18.45	18.15
n66	25	15	1722.5	CP	256QAM	Edge_1RB_Left	17.29	15.69	15.39
n66	25	15	1722.5	CP	256QAM	Edge_1RB_Right	17.42	15.82	15.52
n66	25	15	1722.5	CP	256QAM	Outer_Full	20.02	18.42	18.12
n66	25	15	1745	DFT	QPSK	Inner_Full	24.27	22.67	22.37
n66	25	15	1745	DFT	QPSK	Edge_1RB_Left	22.04	20.44	20.14



BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n66	25	15	1745	DFT	QPSK	Edge_1RB_Right	22.22	20.62	20.32
n66	25	15	1745	DFT	QPSK	Outer_Full	23.94	22.34	22.04
n66	25	15	1745	DFT	16QAM	Inner_Full	23.71	22.11	21.81
n66	25	15	1745	DFT	16QAM	Edge_1RB_Left	22.30	20.70	20.40
n66	25	15	1745	DFT	16QAM	Edge_1RB_Right	22.38	20.78	20.48
n66	25	15	1745	DFT	16QAM	Outer_Full	23.00	21.40	21.10
n66	25	15	1745	DFT	64QAM	Inner_Full	22.35	20.75	20.45
n66	25	15	1745	DFT	64QAM	Edge_1RB_Left	21.34	19.74	19.44
n66	25	15	1745	DFT	64QAM	Edge_1RB_Right	21.49	19.89	19.59
n66	25	15	1745	DFT	64QAM	Outer_Full	22.32	20.72	20.42
n66	25	15	1745	DFT	256QAM	Inner_Full	20.65	19.05	18.75
n66	25	15	1745	DFT	256QAM	Edge_1RB_Left	19.22	17.62	17.32
n66	25	15	1745	DFT	256QAM	Edge_1RB_Right	19.41	17.81	17.51
n66	25	15	1745	DFT	256QAM	Outer_Full	20.94	19.34	19.04
n66	25	15	1745	CP	QPSK	Inner_Full	23.20	21.60	21.30
n66	25	15	1745	CP	QPSK	Edge_1RB_Left	21.08	19.48	19.18
n66	25	15	1745	CP	QPSK	Edge_1RB_Right	21.20	19.60	19.30
n66	25	15	1745	CP	QPSK	Outer_Full	22.29	20.69	20.39
n66	25	15	1745	CP	16QAM	Inner_Full	22.75	21.15	20.85
n66	25	15	1745	CP	16QAM	Edge_1RB_Left	21.47	19.87	19.57
n66	25	15	1745	CP	16QAM	Edge_1RB_Right	21.55	19.95	19.65
n66	25	15	1745	CP	16QAM	Outer_Full	22.35	20.75	20.45
n66	25	15	1745	CP	64QAM	Inner_Full	22.37	20.77	20.47
n66	25	15	1745	CP	64QAM	Edge_1RB_Left	20.31	18.71	18.41
n66	25	15	1745	CP	64QAM	Edge_1RB_Right	20.42	18.82	18.52
n66	25	15	1745	CP	64QAM	Outer_Full	22.23	20.63	20.33
n66	25	15	1745	CP	256QAM	Inner_Full	20.18	18.58	18.28
n66	25	15	1745	CP	256QAM	Edge_1RB_Left	17.34	15.74	15.44
n66	25	15	1745	CP	256QAM	Edge_1RB_Right	17.40	15.80	15.50
n66	25	15	1745	CP	256QAM	Outer_Full	19.86	18.26	17.96



BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n66	25	15	1767.5	DFT	QPSK	Inner_Full	24.07	22.47	22.17
n66	25	15	1767.5	DFT	QPSK	Edge_1RB_Left	22.12	20.52	20.22
n66	25	15	1767.5	DFT	QPSK	Edge_1RB_Right	22.10	20.50	20.20
n66	25	15	1767.5	DFT	QPSK	Outer_Full	23.57	21.97	21.67
n66	25	15	1767.5	DFT	16QAM	Inner_Full	23.38	21.78	21.48
n66	25	15	1767.5	DFT	16QAM	Edge_1RB_Left	22.26	20.66	20.36
n66	25	15	1767.5	DFT	16QAM	Edge_1RB_Right	22.09	20.49	20.19
n66	25	15	1767.5	DFT	16QAM	Outer_Full	22.65	21.05	20.75
n66	25	15	1767.5	DFT	64QAM	Inner_Full	22.02	20.42	20.12
n66	25	15	1767.5	DFT	64QAM	Edge_1RB_Left	21.42	19.82	19.52
n66	25	15	1767.5	DFT	64QAM	Edge_1RB_Right	21.06	19.46	19.16
n66	25	15	1767.5	DFT	64QAM	Outer_Full	21.98	20.38	20.08
n66	25	15	1767.5	DFT	256QAM	Inner_Full	20.39	18.79	18.49
n66	25	15	1767.5	DFT	256QAM	Edge_1RB_Left	19.28	17.68	17.38
n66	25	15	1767.5	DFT	256QAM	Edge_1RB_Right	19.27	17.67	17.37
n66	25	15	1767.5	DFT	256QAM	Outer_Full	20.60	19.00	18.70
n66	25	15	1767.5	CP	QPSK	Inner_Full	22.80	21.20	20.90
n66	25	15	1767.5	CP	QPSK	Edge_1RB_Left	21.13	19.53	19.23
n66	25	15	1767.5	CP	QPSK	Edge_1RB_Right	21.17	19.57	19.27
n66	25	15	1767.5	CP	QPSK	Outer_Full	22.06	20.46	20.16
n66	25	15	1767.5	CP	16QAM	Inner_Full	22.43	20.83	20.53
n66	25	15	1767.5	CP	16QAM	Edge_1RB_Left	21.47	19.87	19.57
n66	25	15	1767.5	CP	16QAM	Edge_1RB_Right	21.54	19.94	19.64
n66	25	15	1767.5	CP	16QAM	Outer_Full	21.97	20.37	20.07
n66	25	15	1767.5	CP	64QAM	Inner_Full	21.94	20.34	20.04
n66	25	15	1767.5	CP	64QAM	Edge_1RB_Left	20.37	18.77	18.47
n66	25	15	1767.5	CP	64QAM	Edge_1RB_Right	20.32	18.72	18.42
n66	25	15	1767.5	CP	64QAM	Outer_Full	21.92	20.32	20.02
n66	25	15	1767.5	CP	256QAM	Inner_Full	19.63	18.03	17.73
n66	25	15	1767.5	CP	256QAM	Edge_1RB_Left	17.30	15.70	15.40



BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n66	25	15	1767.5	CP	256QAM	Edge_1RB_Right	17.38	15.78	15.48
n66	25	15	1767.5	CP	256QAM	Outer_Full	19.51	17.91	17.61
n66	30	15	1725	DFT	QPSK	Inner_Full	24.25	22.65	22.35
n66	30	15	1725	DFT	QPSK	Edge_1RB_Left	21.98	20.38	20.08
n66	30	15	1725	DFT	QPSK	Edge_1RB_Right	22.27	20.67	20.37
n66	30	15	1725	DFT	QPSK	Outer_Full	24.07	22.47	22.17
n66	30	15	1725	DFT	16QAM	Inner_Full	23.88	22.28	21.98
n66	30	15	1725	DFT	16QAM	Edge_1RB_Left	22.27	20.67	20.37
n66	30	15	1725	DFT	16QAM	Edge_1RB_Right	22.38	20.78	20.48
n66	30	15	1725	DFT	16QAM	Outer_Full	23.07	21.47	21.17
n66	30	15	1725	DFT	64QAM	Inner_Full	22.49	20.89	20.59
n66	30	15	1725	DFT	64QAM	Edge_1RB_Left	21.32	19.72	19.42
n66	30	15	1725	DFT	64QAM	Edge_1RB_Right	21.44	19.84	19.54
n66	30	15	1725	DFT	64QAM	Outer_Full	22.58	20.98	20.68
n66	30	15	1725	DFT	256QAM	Inner_Full	21.00	19.40	19.10
n66	30	15	1725	DFT	256QAM	Edge_1RB_Left	19.21	17.61	17.31
n66	30	15	1725	DFT	256QAM	Edge_1RB_Right	19.39	17.79	17.49
n66	30	15	1725	DFT	256QAM	Outer_Full	21.13	19.53	19.23
n66	30	15	1725	CP	QPSK	Inner_Full	23.37	21.77	21.47
n66	30	15	1725	CP	QPSK	Edge_1RB_Left	21.09	19.49	19.19
n66	30	15	1725	CP	QPSK	Edge_1RB_Right	21.16	19.56	19.26
n66	30	15	1725	CP	QPSK	Outer_Full	22.38	20.78	20.48
n66	30	15	1725	CP	16QAM	Inner_Full	22.89	21.29	20.99
n66	30	15	1725	CP	16QAM	Edge_1RB_Left	21.38	19.78	19.48
n66	30	15	1725	CP	16QAM	Edge_1RB_Right	21.63	20.03	19.73
n66	30	15	1725	CP	16QAM	Outer_Full	22.41	20.81	20.51
n66	30	15	1725	CP	64QAM	Inner_Full	22.47	20.87	20.57
n66	30	15	1725	CP	64QAM	Edge_1RB_Left	20.29	18.69	18.39
n66	30	15	1725	CP	64QAM	Edge_1RB_Right	20.51	18.91	18.61
n66	30	15	1725	CP	64QAM	Outer_Full	22.34	20.74	20.44



BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n66	30	15	1725	CP	256QAM	Inner_Full	20.07	18.47	18.17
n66	30	15	1725	CP	256QAM	Edge_1RB_Left	17.29	15.69	15.39
n66	30	15	1725	CP	256QAM	Edge_1RB_Right	17.53	15.93	15.63
n66	30	15	1725	CP	256QAM	Outer_Full	20.11	18.51	18.21
n66	30	15	1745	DFT	QPSK	Inner_Full	24.24	22.64	22.34
n66	30	15	1745	DFT	QPSK	Edge_1RB_Left	22.09	20.49	20.19
n66	30	15	1745	DFT	QPSK	Edge_1RB_Right	22.15	20.55	20.25
n66	30	15	1745	DFT	QPSK	Outer_Full	23.93	22.33	22.03
n66	30	15	1745	DFT	16QAM	Inner_Full	23.80	22.20	21.90
n66	30	15	1745	DFT	16QAM	Edge_1RB_Left	22.29	20.69	20.39
n66	30	15	1745	DFT	16QAM	Edge_1RB_Right	22.41	20.81	20.51
n66	30	15	1745	DFT	16QAM	Outer_Full	22.98	21.38	21.08
n66	30	15	1745	DFT	64QAM	Inner_Full	22.35	20.75	20.45
n66	30	15	1745	DFT	64QAM	Edge_1RB_Left	21.34	19.74	19.44
n66	30	15	1745	DFT	64QAM	Edge_1RB_Right	21.54	19.94	19.64
n66	30	15	1745	DFT	64QAM	Outer_Full	22.50	20.90	20.60
n66	30	15	1745	DFT	256QAM	Inner_Full	20.79	19.19	18.89
n66	30	15	1745	DFT	256QAM	Edge_1RB_Left	19.26	17.66	17.36
n66	30	15	1745	DFT	256QAM	Edge_1RB_Right	19.46	17.86	17.56
n66	30	15	1745	DFT	256QAM	Outer_Full	20.88	19.28	18.98
n66	30	15	1745	CP	QPSK	Inner_Full	23.11	21.51	21.21
n66	30	15	1745	CP	QPSK	Edge_1RB_Left	21.04	19.44	19.14
n66	30	15	1745	CP	QPSK	Edge_1RB_Right	21.19	19.59	19.29
n66	30	15	1745	CP	QPSK	Outer_Full	22.23	20.63	20.33
n66	30	15	1745	CP	16QAM	Inner_Full	23.12	21.52	21.22
n66	30	15	1745	CP	16QAM	Edge_1RB_Left	21.43	19.83	19.53
n66	30	15	1745	CP	16QAM	Edge_1RB_Right	21.65	20.05	19.75
n66	30	15	1745	CP	16QAM	Outer_Full	22.26	20.66	20.36
n66	30	15	1745	CP	64QAM	Inner_Full	20.60	19.00	18.70
n66	30	15	1745	CP	64QAM	Edge_1RB_Left	20.22	18.62	18.32



BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n66	30	15	1745	CP	64QAM	Edge_1RB_Right	20.42	18.82	18.52
n66	30	15	1745	CP	64QAM	Outer_Full	22.26	20.66	20.36
n66	30	15	1745	CP	256QAM	Inner_Full	19.86	18.26	17.96
n66	30	15	1745	CP	256QAM	Edge_1RB_Left	17.39	15.79	15.49
n66	30	15	1745	CP	256QAM	Edge_1RB_Right	17.48	15.88	15.58
n66	30	15	1745	CP	256QAM	Outer_Full	19.96	18.36	18.06
n66	30	15	1765	DFT	QPSK	Inner_Full	24.13	22.53	22.23
n66	30	15	1765	DFT	QPSK	Edge_1RB_Left	21.98	20.38	20.08
n66	30	15	1765	DFT	QPSK	Edge_1RB_Right	22.01	20.41	20.11
n66	30	15	1765	DFT	QPSK	Outer_Full	23.75	22.15	21.85
n66	30	15	1765	DFT	16QAM	Inner_Full	23.37	21.77	21.47
n66	30	15	1765	DFT	16QAM	Edge_1RB_Left	22.27	20.67	20.37
n66	30	15	1765	DFT	16QAM	Edge_1RB_Right	22.10	20.50	20.20
n66	30	15	1765	DFT	16QAM	Outer_Full	22.63	21.03	20.73
n66	30	15	1765	DFT	64QAM	Inner_Full	22.00	20.40	20.10
n66	30	15	1765	DFT	64QAM	Edge_1RB_Left	21.44	19.84	19.54
n66	30	15	1765	DFT	64QAM	Edge_1RB_Right	21.06	19.46	19.16
n66	30	15	1765	DFT	64QAM	Outer_Full	22.14	20.54	20.24
n66	30	15	1765	DFT	256QAM	Inner_Full	20.44	18.84	18.54
n66	30	15	1765	DFT	256QAM	Edge_1RB_Left	19.22	17.62	17.32
n66	30	15	1765	DFT	256QAM	Edge_1RB_Right	19.30	17.70	17.40
n66	30	15	1765	DFT	256QAM	Outer_Full	20.60	19.00	18.70
n66	30	15	1765	CP	QPSK	Inner_Full	22.88	21.28	20.98
n66	30	15	1765	CP	QPSK	Edge_1RB_Left	20.99	19.39	19.09
n66	30	15	1765	CP	QPSK	Edge_1RB_Right	21.09	19.49	19.19
n66	30	15	1765	CP	QPSK	Outer_Full	21.97	20.37	20.07
n66	30	15	1765	CP	16QAM	Inner_Full	22.19	20.59	20.29
n66	30	15	1765	CP	16QAM	Edge_1RB_Left	21.41	19.81	19.51
n66	30	15	1765	CP	16QAM	Edge_1RB_Right	21.52	19.92	19.62
n66	30	15	1765	CP	16QAM	Outer_Full	21.96	20.36	20.06



BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n66	30	15	1765	CP	64QAM	Inner_Full	22.06	20.46	20.16
n66	30	15	1765	CP	64QAM	Edge_1RB_Left	20.38	18.78	18.48
n66	30	15	1765	CP	64QAM	Edge_1RB_Right	20.37	18.77	18.47
n66	30	15	1765	CP	64QAM	Outer_Full	22.03	20.43	20.13
n66	30	15	1765	CP	256QAM	Inner_Full	19.58	17.98	17.68
n66	30	15	1765	CP	256QAM	Edge_1RB_Left	17.35	15.75	15.45
n66	30	15	1765	CP	256QAM	Edge_1RB_Right	17.49	15.89	15.59
n66	30	15	1765	CP	256QAM	Outer_Full	19.62	18.02	17.72
n66	35	15	1727.5	DFT	QPSK	Inner_Full	24.18	22.58	22.28
n66	35	15	1727.5	DFT	QPSK	Edge_1RB_Left	24.08	22.48	22.18
n66	35	15	1727.5	DFT	QPSK	Edge_1RB_Right	24.16	22.56	22.26
n66	35	15	1727.5	DFT	QPSK	Outer_Full	24.14	22.54	22.24
n66	35	15	1727.5	DFT	16QAM	Inner_Full	23.14	21.54	21.24
n66	35	15	1727.5	DFT	16QAM	Edge_1RB_Left	23.19	21.59	21.29
n66	35	15	1727.5	DFT	16QAM	Edge_1RB_Right	23.25	21.65	21.35
n66	35	15	1727.5	DFT	16QAM	Outer_Full	23.13	21.53	21.23
n66	35	15	1727.5	DFT	64QAM	Inner_Full	22.71	21.11	20.81
n66	35	15	1727.5	DFT	64QAM	Edge_1RB_Left	22.71	21.11	20.81
n66	35	15	1727.5	DFT	64QAM	Edge_1RB_Right	22.72	21.12	20.82
n66	35	15	1727.5	DFT	64QAM	Outer_Full	22.71	21.11	20.81
n66	35	15	1727.5	DFT	256QAM	Inner_Full	21.27	19.67	19.37
n66	35	15	1727.5	DFT	256QAM	Edge_1RB_Left	21.23	19.63	19.33
n66	35	15	1727.5	DFT	256QAM	Edge_1RB_Right	21.28	19.68	19.38
n66	35	15	1727.5	DFT	256QAM	Outer_Full	21.27	19.67	19.37
n66	35	15	1727.5	CP	QPSK	Inner_Full	22.59	20.99	20.69
n66	35	15	1727.5	CP	QPSK	Edge_1RB_Left	22.59	20.99	20.69
n66	35	15	1727.5	CP	QPSK	Edge_1RB_Right	22.57	20.97	20.67
n66	35	15	1727.5	CP	QPSK	Outer_Full	22.54	20.94	20.64
n66	35	15	1727.5	CP	16QAM	Inner_Full	22.60	21.00	20.70
n66	35	15	1727.5	CP	16QAM	Edge_1RB_Left	22.60	21.00	20.70



BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n66	35	15	1727.5	CP	16QAM	Edge_1RB_Right	22.59	20.99	20.69
n66	35	15	1727.5	CP	16QAM	Outer_Full	22.59	20.99	20.69
n66	35	15	1727.5	CP	64QAM	Inner_Full	22.61	21.01	20.71
n66	35	15	1727.5	CP	64QAM	Edge_1RB_Left	22.67	21.07	20.77
n66	35	15	1727.5	CP	64QAM	Edge_1RB_Right	22.68	21.08	20.78
n66	35	15	1727.5	CP	64QAM	Outer_Full	22.60	21.00	20.70
n66	35	15	1727.5	CP	256QAM	Inner_Full	20.20	18.60	18.30
n66	35	15	1727.5	CP	256QAM	Edge_1RB_Left	20.20	18.60	18.30
n66	35	15	1727.5	CP	256QAM	Edge_1RB_Right	20.19	18.59	18.29
n66	35	15	1727.5	CP	256QAM	Outer_Full	20.14	18.54	18.24
n66	35	15	1745	DFT	QPSK	Inner_Full	24.13	22.53	22.23
n66	35	15	1745	DFT	QPSK	Edge_1RB_Left	24.22	22.62	22.32
n66	35	15	1745	DFT	QPSK	Edge_1RB_Right	24.12	22.52	22.22
n66	35	15	1745	DFT	QPSK	Outer_Full	24.16	22.56	22.26
n66	35	15	1745	DFT	16QAM	Inner_Full	23.19	21.59	21.29
n66	35	15	1745	DFT	16QAM	Edge_1RB_Left	23.16	21.56	21.26
n66	35	15	1745	DFT	16QAM	Edge_1RB_Right	23.16	21.56	21.26
n66	35	15	1745	DFT	16QAM	Outer_Full	23.24	21.64	21.34
n66	35	15	1745	DFT	64QAM	Inner_Full	22.62	21.02	20.72
n66	35	15	1745	DFT	64QAM	Edge_1RB_Left	22.70	21.10	20.80
n66	35	15	1745	DFT	64QAM	Edge_1RB_Right	22.63	21.03	20.73
n66	35	15	1745	DFT	64QAM	Outer_Full	22.70	21.10	20.80
n66	35	15	1745	DFT	256QAM	Inner_Full	21.10	19.50	19.20
n66	35	15	1745	DFT	256QAM	Edge_1RB_Left	21.14	19.54	19.24
n66	35	15	1745	DFT	256QAM	Edge_1RB_Right	21.18	19.58	19.28
n66	35	15	1745	DFT	256QAM	Outer_Full	21.15	19.55	19.25
n66	35	15	1745	CP	QPSK	Inner_Full	22.52	20.92	20.62
n66	35	15	1745	CP	QPSK	Edge_1RB_Left	22.52	20.92	20.62
n66	35	15	1745	CP	QPSK	Edge_1RB_Right	22.54	20.94	20.64
n66	35	15	1745	CP	QPSK	Outer_Full	22.54	20.94	20.64



BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n66	35	15	1745	CP	16QAM	Inner_Full	22.51	20.91	20.61
n66	35	15	1745	CP	16QAM	Edge_1RB_Left	22.50	20.90	20.60
n66	35	15	1745	CP	16QAM	Edge_1RB_Right	22.55	20.95	20.65
n66	35	15	1745	CP	16QAM	Outer_Full	22.55	20.95	20.65
n66	35	15	1745	CP	64QAM	Inner_Full	22.56	20.96	20.66
n66	35	15	1745	CP	64QAM	Edge_1RB_Left	22.58	20.98	20.68
n66	35	15	1745	CP	64QAM	Edge_1RB_Right	22.64	21.04	20.74
n66	35	15	1745	CP	64QAM	Outer_Full	22.55	20.95	20.65
n66	35	15	1745	CP	256QAM	Inner_Full	20.07	18.47	18.17
n66	35	15	1745	CP	256QAM	Edge_1RB_Left	20.15	18.55	18.25
n66	35	15	1745	CP	256QAM	Edge_1RB_Right	20.08	18.48	18.18
n66	35	15	1745	CP	256QAM	Outer_Full	20.10	18.50	18.20
n66	35	15	1762.5	DFT	QPSK	Inner_Full	24.10	22.50	22.20
n66	35	15	1762.5	DFT	QPSK	Edge_1RB_Left	24.03	22.43	22.13
n66	35	15	1762.5	DFT	QPSK	Edge_1RB_Right	24.19	22.59	22.29
n66	35	15	1762.5	DFT	QPSK	Outer_Full	24.00	22.40	22.10
n66	35	15	1762.5	DFT	16QAM	Inner_Full	22.94	21.34	21.04
n66	35	15	1762.5	DFT	16QAM	Edge_1RB_Left	22.82	21.22	20.92
n66	35	15	1762.5	DFT	16QAM	Edge_1RB_Right	22.93	21.33	21.03
n66	35	15	1762.5	DFT	16QAM	Outer_Full	22.87	21.27	20.97
n66	35	15	1762.5	DFT	64QAM	Inner_Full	22.40	20.80	20.50
n66	35	15	1762.5	DFT	64QAM	Edge_1RB_Left	22.33	20.73	20.43
n66	35	15	1762.5	DFT	64QAM	Edge_1RB_Right	22.33	20.73	20.43
n66	35	15	1762.5	DFT	64QAM	Outer_Full	22.40	20.80	20.50
n66	35	15	1762.5	DFT	256QAM	Inner_Full	20.85	19.25	18.95
n66	35	15	1762.5	DFT	256QAM	Edge_1RB_Left	20.85	19.25	18.95
n66	35	15	1762.5	DFT	256QAM	Edge_1RB_Right	20.92	19.32	19.02
n66	35	15	1762.5	DFT	256QAM	Outer_Full	20.89	19.29	18.99
n66	35	15	1762.5	CP	QPSK	Inner_Full	22.20	20.60	20.30
n66	35	15	1762.5	CP	QPSK	Edge_1RB_Left	22.23	20.63	20.33



BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n66	35	15	1762.5	CP	QPSK	Edge_1RB_Right	22.20	20.60	20.30
n66	35	15	1762.5	CP	QPSK	Outer_Full	22.18	20.58	20.28
n66	35	15	1762.5	CP	16QAM	Inner_Full	22.16	20.56	20.26
n66	35	15	1762.5	CP	16QAM	Edge_1RB_Left	22.16	20.56	20.26
n66	35	15	1762.5	CP	16QAM	Edge_1RB_Right	22.15	20.55	20.25
n66	35	15	1762.5	CP	16QAM	Outer_Full	22.21	20.61	20.31
n66	35	15	1762.5	CP	64QAM	Inner_Full	22.23	20.63	20.33
n66	35	15	1762.5	CP	64QAM	Edge_1RB_Left	22.29	20.69	20.39
n66	35	15	1762.5	CP	64QAM	Edge_1RB_Right	22.29	20.69	20.39
n66	35	15	1762.5	CP	64QAM	Outer_Full	22.28	20.68	20.38
n66	35	15	1762.5	CP	256QAM	Inner_Full	19.81	18.21	17.91
n66	35	15	1762.5	CP	256QAM	Edge_1RB_Left	19.82	18.22	17.92
n66	35	15	1762.5	CP	256QAM	Edge_1RB_Right	19.83	18.23	17.93
n66	35	15	1762.5	CP	256QAM	Outer_Full	19.83	18.23	17.93
n66	40	15	1730	DFT	QPSK	Inner_Full	24.22	22.62	22.32
n66	40	15	1730	DFT	QPSK	Edge_1RB_Left	21.92	20.32	20.02
n66	40	15	1730	DFT	QPSK	Edge_1RB_Right	22.14	20.54	20.24
n66	40	15	1730	DFT	QPSK	Outer_Full	24.21	22.61	22.31
n66	40	15	1730	DFT	16QAM	Inner_Full	24.11	22.51	22.21
n66	40	15	1730	DFT	16QAM	Edge_1RB_Left	22.18	20.58	20.28
n66	40	15	1730	DFT	16QAM	Edge_1RB_Right	22.39	20.79	20.49
n66	40	15	1730	DFT	16QAM	Outer_Full	23.31	21.71	21.41
n66	40	15	1730	DFT	64QAM	Inner_Full	22.76	21.16	20.86
n66	40	15	1730	DFT	64QAM	Edge_1RB_Left	21.25	19.65	19.35
n66	40	15	1730	DFT	64QAM	Edge_1RB_Right	21.50	19.90	19.60
n66	40	15	1730	DFT	64QAM	Outer_Full	22.67	21.07	20.77
n66	40	15	1730	DFT	256QAM	Inner_Full	21.17	19.57	19.27
n66	40	15	1730	DFT	256QAM	Edge_1RB_Left	19.14	17.54	17.24
n66	40	15	1730	DFT	256QAM	Edge_1RB_Right	19.40	17.80	17.50
n66	40	15	1730	DFT	256QAM	Outer_Full	21.22	19.62	19.32



BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n66	40	15	1730	CP	QPSK	Inner_Full	23.57	21.97	21.67
n66	40	15	1730	CP	QPSK	Edge_1RB_Left	20.99	19.39	19.09
n66	40	15	1730	CP	QPSK	Edge_1RB_Right	21.21	19.61	19.31
n66	40	15	1730	CP	QPSK	Outer_Full	22.58	20.98	20.68
n66	40	15	1730	CP	16QAM	Inner_Full	23.20	21.60	21.30
n66	40	15	1730	CP	16QAM	Edge_1RB_Left	21.33	19.73	19.43
n66	40	15	1730	CP	16QAM	Edge_1RB_Right	21.61	20.01	19.71
n66	40	15	1730	CP	16QAM	Outer_Full	22.57	20.97	20.67
n66	40	15	1730	CP	64QAM	Inner_Full	22.74	21.14	20.84
n66	40	15	1730	CP	64QAM	Edge_1RB_Left	20.22	18.62	18.32
n66	40	15	1730	CP	64QAM	Edge_1RB_Right	20.49	18.89	18.59
n66	40	15	1730	CP	64QAM	Outer_Full	22.50	20.90	20.60
n66	40	15	1730	CP	256QAM	Inner_Full	20.22	18.62	18.32
n66	40	15	1730	CP	256QAM	Edge_1RB_Left	17.21	15.61	15.31
n66	40	15	1730	CP	256QAM	Edge_1RB_Right	17.41	15.81	15.51
n66	40	15	1730	CP	256QAM	Outer_Full	20.22	18.62	18.32
n66	40	15	1745	DFT	QPSK	Inner_Full	24.22	22.62	22.32
n66	40	15	1745	DFT	QPSK	Edge_1RB_Left	21.90	20.30	20.00
n66	40	15	1745	DFT	QPSK	Edge_1RB_Right	22.13	20.53	20.23
n66	40	15	1745	DFT	QPSK	Outer_Full	24.29	22.69	22.39
n66	40	15	1745	DFT	16QAM	Inner_Full	24.06	22.46	22.16
n66	40	15	1745	DFT	16QAM	Edge_1RB_Left	22.17	20.57	20.27
n66	40	15	1745	DFT	16QAM	Edge_1RB_Right	22.33	20.73	20.43
n66	40	15	1745	DFT	16QAM	Outer_Full	23.09	21.49	21.19
n66	40	15	1745	DFT	64QAM	Inner_Full	22.48	20.88	20.58
n66	40	15	1745	DFT	64QAM	Edge_1RB_Left	21.31	19.71	19.41
n66	40	15	1745	DFT	64QAM	Edge_1RB_Right	21.44	19.84	19.54
n66	40	15	1745	DFT	64QAM	Outer_Full	22.54	20.94	20.64
n66	40	15	1745	DFT	256QAM	Inner_Full	20.90	19.30	19.00
n66	40	15	1745	DFT	256QAM	Edge_1RB_Left	19.10	17.50	17.20



BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n66	40	15	1745	DFT	256QAM	Edge_1RB_Right	19.33	17.73	17.43
n66	40	15	1745	DFT	256QAM	Outer_Full	21.11	19.51	19.21
n66	40	15	1745	CP	QPSK	Inner_Full	23.32	21.72	21.42
n66	40	15	1745	CP	QPSK	Edge_1RB_Left	20.93	19.33	19.03
n66	40	15	1745	CP	QPSK	Edge_1RB_Right	21.16	19.56	19.26
n66	40	15	1745	CP	QPSK	Outer_Full	22.43	20.83	20.53
n66	40	15	1745	CP	16QAM	Inner_Full	23.07	21.47	21.17
n66	40	15	1745	CP	16QAM	Edge_1RB_Left	21.38	19.78	19.48
n66	40	15	1745	CP	16QAM	Edge_1RB_Right	21.60	20.00	19.70
n66	40	15	1745	CP	16QAM	Outer_Full	22.41	20.81	20.51
n66	40	15	1745	CP	64QAM	Inner_Full	22.46	20.86	20.56
n66	40	15	1745	CP	64QAM	Edge_1RB_Left	20.22	18.62	18.32
n66	40	15	1745	CP	64QAM	Edge_1RB_Right	20.46	18.86	18.56
n66	40	15	1745	CP	64QAM	Outer_Full	22.35	20.75	20.45
n66	40	15	1745	CP	256QAM	Inner_Full	19.96	18.36	18.06
n66	40	15	1745	CP	256QAM	Edge_1RB_Left	17.22	15.62	15.32
n66	40	15	1745	CP	256QAM	Edge_1RB_Right	17.48	15.88	15.58
n66	40	15	1745	CP	256QAM	Outer_Full	20.03	18.43	18.13
n66	40	15	1760	DFT	QPSK	Inner_Full	24.18	22.58	22.28
n66	40	15	1760	DFT	QPSK	Edge_1RB_Left	22.02	20.42	20.12
n66	40	15	1760	DFT	QPSK	Edge_1RB_Right	22.00	20.40	20.10
n66	40	15	1760	DFT	QPSK	Outer_Full	24.03	22.43	22.13
n66	40	15	1760	DFT	16QAM	Inner_Full	23.58	21.98	21.68
n66	40	15	1760	DFT	16QAM	Edge_1RB_Left	22.26	20.66	20.36
n66	40	15	1760	DFT	16QAM	Edge_1RB_Right	22.00	20.40	20.10
n66	40	15	1760	DFT	16QAM	Outer_Full	22.95	21.35	21.05
n66	40	15	1760	DFT	64QAM	Inner_Full	22.30	20.70	20.40
n66	40	15	1760	DFT	64QAM	Edge_1RB_Left	21.36	19.76	19.46
n66	40	15	1760	DFT	64QAM	Edge_1RB_Right	21.19	19.59	19.29
n66	40	15	1760	DFT	64QAM	Outer_Full	22.33	20.73	20.43



BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n66	40	15	1760	DFT	256QAM	Inner_Full	20.66	19.06	18.76
n66	40	15	1760	DFT	256QAM	Edge_1RB_Left	19.09	17.49	17.19
n66	40	15	1760	DFT	256QAM	Edge_1RB_Right	19.21	17.61	17.31
n66	40	15	1760	DFT	256QAM	Outer_Full	20.95	19.35	19.05
n66	40	15	1760	CP	QPSK	Inner_Full	23.06	21.46	21.16
n66	40	15	1760	CP	QPSK	Edge_1RB_Left	20.97	19.37	19.07
n66	40	15	1760	CP	QPSK	Edge_1RB_Right	21.05	19.45	19.15
n66	40	15	1760	CP	QPSK	Outer_Full	22.30	20.70	20.40
n66	40	15	1760	CP	16QAM	Inner_Full	22.49	20.89	20.59
n66	40	15	1760	CP	16QAM	Edge_1RB_Left	21.39	19.79	19.49
n66	40	15	1760	CP	16QAM	Edge_1RB_Right	21.53	19.93	19.63
n66	40	15	1760	CP	16QAM	Outer_Full	22.23	20.63	20.33
n66	40	15	1760	CP	64QAM	Inner_Full	22.14	20.54	20.24
n66	40	15	1760	CP	64QAM	Edge_1RB_Left	20.38	18.78	18.48
n66	40	15	1760	CP	64QAM	Edge_1RB_Right	20.37	18.77	18.47
n66	40	15	1760	CP	64QAM	Outer_Full	22.11	20.51	20.21
n66	40	15	1760	CP	256QAM	Inner_Full	19.74	18.14	17.84
n66	40	15	1760	CP	256QAM	Edge_1RB_Left	17.20	15.60	15.30
n66	40	15	1760	CP	256QAM	Edge_1RB_Right	17.36	15.76	15.46
n66	40	15	1760	CP	256QAM	Outer_Full	19.78	18.18	17.88
n66	45	15	1732.5	DFT	QPSK	Inner_Full	24.32	22.72	22.42
n66	45	15	1732.5	DFT	QPSK	Edge_1RB_Left	24.40	22.80	22.50
n66	45	15	1732.5	DFT	QPSK	Edge_1RB_Right	24.28	22.68	22.38
n66	45	15	1732.5	DFT	QPSK	Outer_Full	24.27	22.67	22.37
n66	45	15	1732.5	DFT	16QAM	Inner_Full	23.34	21.74	21.44
n66	45	15	1732.5	DFT	16QAM	Edge_1RB_Left	23.35	21.75	21.45
n66	45	15	1732.5	DFT	16QAM	Edge_1RB_Right	23.38	21.78	21.48
n66	45	15	1732.5	DFT	16QAM	Outer_Full	23.38	21.78	21.48
n66	45	15	1732.5	DFT	64QAM	Inner_Full	22.74	21.14	20.84
n66	45	15	1732.5	DFT	64QAM	Edge_1RB_Left	22.68	21.08	20.78



BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n66	45	15	1732.5	DFT	64QAM	Edge_1RB_Right	22.75	21.15	20.85
n66	45	15	1732.5	DFT	64QAM	Outer_Full	22.74	21.14	20.84
n66	45	15	1732.5	DFT	256QAM	Inner_Full	21.33	19.73	19.43
n66	45	15	1732.5	DFT	256QAM	Edge_1RB_Left	21.31	19.71	19.41
n66	45	15	1732.5	DFT	256QAM	Edge_1RB_Right	21.26	19.66	19.36
n66	45	15	1732.5	DFT	256QAM	Outer_Full	21.30	19.70	19.40
n66	45	15	1732.5	CP	QPSK	Inner_Full	22.71	21.11	20.81
n66	45	15	1732.5	CP	QPSK	Edge_1RB_Left	22.73	21.13	20.83
n66	45	15	1732.5	CP	QPSK	Edge_1RB_Right	22.69	21.09	20.79
n66	45	15	1732.5	CP	QPSK	Outer_Full	22.70	21.10	20.80
n66	45	15	1732.5	CP	16QAM	Inner_Full	22.61	21.01	20.71
n66	45	15	1732.5	CP	16QAM	Edge_1RB_Left	22.60	21.00	20.70
n66	45	15	1732.5	CP	16QAM	Edge_1RB_Right	22.59	20.99	20.69
n66	45	15	1732.5	CP	16QAM	Outer_Full	22.65	21.05	20.75
n66	45	15	1732.5	CP	64QAM	Inner_Full	22.66	21.06	20.76
n66	45	15	1732.5	CP	64QAM	Edge_1RB_Left	22.67	21.07	20.77
n66	45	15	1732.5	CP	64QAM	Edge_1RB_Right	22.66	21.06	20.76
n66	45	15	1732.5	CP	64QAM	Outer_Full	22.66	21.06	20.76
n66	45	15	1732.5	CP	256QAM	Inner_Full	20.21	18.61	18.31
n66	45	15	1732.5	CP	256QAM	Edge_1RB_Left	20.24	18.64	18.34
n66	45	15	1732.5	CP	256QAM	Edge_1RB_Right	20.24	18.64	18.34
n66	45	15	1732.5	CP	256QAM	Outer_Full	20.18	18.58	18.28
n66	45	15	1745	DFT	QPSK	Inner_Full	24.30	22.70	22.40
n66	45	15	1745	DFT	QPSK	Edge_1RB_Left	24.40	22.80	22.50
n66	45	15	1745	DFT	QPSK	Edge_1RB_Right	24.32	22.72	22.42
n66	45	15	1745	DFT	QPSK	Outer_Full	24.37	22.77	22.47
n66	45	15	1745	DFT	16QAM	Inner_Full	23.33	21.73	21.43
n66	45	15	1745	DFT	16QAM	Edge_1RB_Left	23.27	21.67	21.37
n66	45	15	1745	DFT	16QAM	Edge_1RB_Right	23.26	21.66	21.36
n66	45	15	1745	DFT	16QAM	Outer_Full	23.20	21.60	21.30



BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n66	45	15	1745	DFT	64QAM	Inner_Full	22.69	21.09	20.79
n66	45	15	1745	DFT	64QAM	Edge_1RB_Left	22.64	21.04	20.74
n66	45	15	1745	DFT	64QAM	Edge_1RB_Right	22.63	21.03	20.73
n66	45	15	1745	DFT	64QAM	Outer_Full	22.64	21.04	20.74
n66	45	15	1745	DFT	256QAM	Inner_Full	21.20	19.60	19.30
n66	45	15	1745	DFT	256QAM	Edge_1RB_Left	21.14	19.54	19.24
n66	45	15	1745	DFT	256QAM	Edge_1RB_Right	21.12	19.52	19.22
n66	45	15	1745	DFT	256QAM	Outer_Full	21.18	19.58	19.28
n66	45	15	1745	CP	QPSK	Inner_Full	22.69	21.09	20.79
n66	45	15	1745	CP	QPSK	Edge_1RB_Left	22.61	21.01	20.71
n66	45	15	1745	CP	QPSK	Edge_1RB_Right	22.67	21.07	20.77
n66	45	15	1745	CP	QPSK	Outer_Full	22.58	20.98	20.68
n66	45	15	1745	CP	16QAM	Inner_Full	22.56	20.96	20.66
n66	45	15	1745	CP	16QAM	Edge_1RB_Left	22.55	20.95	20.65
n66	45	15	1745	CP	16QAM	Edge_1RB_Right	22.50	20.90	20.60
n66	45	15	1745	CP	16QAM	Outer_Full	22.48	20.88	20.58
n66	45	15	1745	CP	64QAM	Inner_Full	22.62	21.02	20.72
n66	45	15	1745	CP	64QAM	Edge_1RB_Left	22.55	20.95	20.65
n66	45	15	1745	CP	64QAM	Edge_1RB_Right	22.55	20.95	20.65
n66	45	15	1745	CP	64QAM	Outer_Full	22.55	20.95	20.65
n66	45	15	1745	CP	256QAM	Inner_Full	20.11	18.51	18.21
n66	45	15	1745	CP	256QAM	Edge_1RB_Left	20.09	18.49	18.19
n66	45	15	1745	CP	256QAM	Edge_1RB_Right	20.12	18.52	18.22
n66	45	15	1745	CP	256QAM	Outer_Full	20.12	18.52	18.22
n66	45	15	1757.5	DFT	QPSK	Inner_Full	24.03	22.43	22.13
n66	45	15	1757.5	DFT	QPSK	Edge_1RB_Left	23.84	22.24	21.94
n66	45	15	1757.5	DFT	QPSK	Edge_1RB_Right	23.99	22.39	22.09
n66	45	15	1757.5	DFT	QPSK	Outer_Full	23.94	22.34	22.04
n66	45	15	1757.5	DFT	16QAM	Inner_Full	22.93	21.33	21.03
n66	45	15	1757.5	DFT	16QAM	Edge_1RB_Left	22.99	21.39	21.09



BAND	BW (MHz)	SCS (kHz)	FREQ (MHz)	OFDM	MODULATION	RB LOCATION	POWER (dBm)	ERP/EIRP (dBm) (Upper)	ERP/EIRP (dBm) (Lower)
n66	45	15	1757.5	DFT	16QAM	Edge_1RB_Right	22.93	21.33	21.03
n66	45	15	1757.5	DFT	16QAM	Outer_Full	22.92	21.32	21.02
n66	45	15	1757.5	DFT	64QAM	Inner_Full	22.30	20.70	20.40
n66	45	15	1757.5	DFT	64QAM	Edge_1RB_Left	22.35	20.75	20.45
n66	45	15	1757.5	DFT	64QAM	Edge_1RB_Right	22.30	20.70	20.40
n66	45	15	1757.5	DFT	64QAM	Outer_Full	22.36	20.76	20.46
n66	45	15	1757.5	DFT	256QAM	Inner_Full	20.86	19.26	18.96
n66	45	15	1757.5	DFT	256QAM	Edge_1RB_Left	20.91	19.31	19.01
n66	45	15	1757.5	DFT	256QAM	Edge_1RB_Right	20.92	19.32	19.02
n66	45	15	1757.5	DFT	256QAM	Outer_Full	20.90	19.30	19.00
n66	45	15	1757.5	CP	QPSK	Inner_Full	22.42	20.82	20.52
n66	45	15	1757.5	CP	QPSK	Edge_1RB_Left	22.41	20.81	20.51
n66	45	15	1757.5	CP	QPSK	Edge_1RB_Right	22.45	20.85	20.55
n66	45	15	1757.5	CP	QPSK	Outer_Full	22.43	20.83	20.53
n66	45	15	1757.5	CP	16QAM	Inner_Full	22.28	20.68	20.38
n66	45	15	1757.5	CP	16QAM	Edge_1RB_Left	22.30	20.70	20.40
n66	45	15	1757.5	CP	16QAM	Edge_1RB_Right	22.29	20.69	20.39
n66	45	15	1757.5	CP	16QAM	Outer_Full	22.28	20.68	20.38
n66	45	15	1757.5	CP	64QAM	Inner_Full	22.34	20.74	20.44
n66	45	15	1757.5	CP	64QAM	Edge_1RB_Left	22.35	20.75	20.45
n66	45	15	1757.5	CP	64QAM	Edge_1RB_Right	22.29	20.69	20.39
n66	45	15	1757.5	CP	64QAM	Outer_Full	22.28	20.68	20.38
n66	45	15	1757.5	CP	256QAM	Inner_Full	19.82	18.22	17.92
n66	45	15	1757.5	CP	256QAM	Edge_1RB_Left	19.82	18.22	17.92
n66	45	15	1757.5	CP	256QAM	Edge_1RB_Right	19.81	18.21	17.91
n66	45	15	1757.5	CP	256QAM	Outer_Full	19.83	18.23	17.93

A.2 FIELD STRENGTH OF SPURIOUS RADIATION

Reference

FCC: CFR 2.1053, 22.917, 27.53.


A.2.1 Measurement Method

This measurement is carried out in fully-anechoic chamber FAC-3.


The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment, which is the transmitted carrier. The resolution bandwidth is set 1MHz as outlined in Part 22.917, 24.238,27.53(m) (h) . The spectrum was scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of the NR Band.

The procedure of radiated spurious emissions is as follows:

1. For radiated emissions measurements performed at frequencies less than or equal to 1 GHz, EUT was placed on a 80 cm high non-conductive stand at a 3 meter test distance from the receive antenna. For radiated measurements performed at frequencies above 1 GHz, EUT was placed on a 1.5 meter high non-conductive stand at a 3 meter test distance from the receive antenna. Receiving antenna was placed on the antenna mast 3 meters from the EUT. For emission measurements. The receiving antenna shall be varied from 1 m to 4 m in height above the reference ground in a search for the relative positioning that produces the maximum radiated signal level. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.

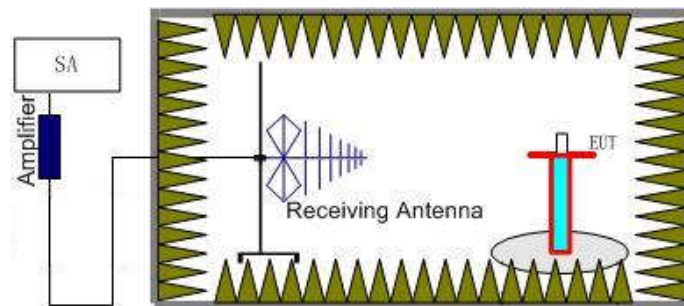

2. The EUT is then put into continuously transmitting mode at its maximum power level during the test. And the maximum value of the receiver should be recorded as (Pr).
3. The EUT shall be replaced by a substitution antenna. The test setup refers to figure below.

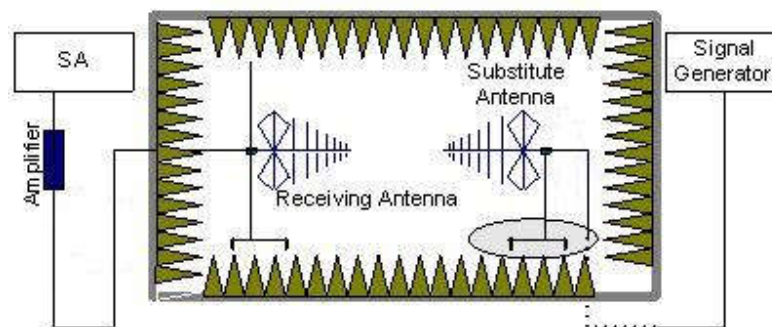

- In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (P_{Mea}) is applied to the input of the substitution antenna and adjusts the level of the signal generator output until the value of the receiver reaches the previously recorded (P_r). The power of signal source (P_{Mea}) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.
4. The Path loss (P_{pl}) between the Signal Source with the Substitution Antenna and the Substitution Antenna Gain(dBi) (G_a) should be recorded after test.
An amplifier should be connected in for the test.
The Path loss (P_{pl}) is the summation of the cable loss and the gain of the amplifier.
The measurement results are obtained as described below:
Power (EIRP)= $P_{Mea} - P_{pl} + G_a$
5. This value is EIRP since the measurement is calibrated using an antenna of known gain (unit: dBi) and known input power.
6. ERP can be calculated from EIRP by subtracting the gain of the dipole, $ERP = EIRP - 2.15dB$.

A.2.2 Measurement Results

Radiated emissions measurements were made only at the upper, middle, and lower carrier frequencies of the NR Band. It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of the NR Band into any of the other blocks. The equipment must still, however, meet emissions requirements with the carrier at all frequencies over which it is capable of operating and it is the manufacturer's responsibility to verify this.
Only worst case result is given below.

**Upper antenna****n2, 5MHz, DFT-OFDM, QPSK, Channel 370500**

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Polarization
4433.25	-57.83	1.30	12.40	-46.73	-13.00	H
5477.62	-55.39	1.30	12.50	-44.19	-13.00	H
6918.92	-59.63	1.80	12.40	-49.03	-13.00	H
9174.92	-56.56	2.10	11.60	-47.06	-13.00	H
14944.62	-52.27	2.70	11.20	-43.77	-13.00	H
17192.31	-51.59	2.90	14.50	-39.99	-13.00	H

n2, 5MHz, DFT-OFDM, QPSK, Channel 376000

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Polarization
5534.25	-55.84	1.40	13.10	-44.14	-13.00	H
7463.08	-58.77	1.90	12.00	-48.67	-13.00	H
9184.15	-57.62	2.10	11.60	-48.12	-13.00	H
11139.23	-54.13	2.50	10.50	-46.13	-13.00	H
13977.23	-54.81	2.50	12.40	-44.91	-13.00	H
16739.54	-53.31	2.90	16.50	-39.71	-13.00	H

n2, 5MHz, DFT-OFDM, QPSK, Channel 381500

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Polarization
4420.50	-57.90	1.30	12.40	-46.80	-13.00	H
5393.62	-55.57	1.20	12.50	-44.27	-13.00	H
7467.23	-59.07	1.90	12.00	-48.97	-13.00	H
9357.69	-58.12	2.00	11.60	-48.52	-13.00	H
12745.85	-56.26	2.60	13.80	-45.06	-13.00	H
16720.62	-53.04	2.90	16.50	-39.44	-13.00	H

**n5, 5MHz, DFT-OFDM, QPSK, Channel 165300**

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak ERP(dBm)	Limit (dBm)	Polarization
5547.38	-56.16	1.40	13.10	-46.61	-13.00	V
6671.29	-58.66	1.80	12.40	-50.21	-13.00	V
7456.43	-58.95	1.90	12.00	-51.00	-13.00	V
8600.71	-58.56	2.00	12.00	-50.71	-13.00	V
9321.14	-57.85	2.00	11.60	-50.40	-13.00	V
9859.71	-57.74	2.30	11.20	-50.99	-13.00	V

n5, 5MHz, DFT-OFDM, QPSK, Channel 167300

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak ERP(dBm)	Limit (dBm)	Polarization
5753.25	-57.12	1.50	13.10	-47.67	-13.00	V
6487.57	-60.30	1.60	13.10	-50.95	-13.00	V
7020.57	-58.87	1.80	12.00	-50.82	-13.00	V
7861.29	-59.14	1.70	11.30	-51.69	-13.00	V
8656.14	-58.97	2.00	12.00	-51.12	-13.00	V
9720.86	-57.50	2.20	11.20	-50.65	-13.00	V

n5, 5MHz, DFT-OFDM, QPSK, Channel 169300

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak ERP(dBm)	Limit (dBm)	Polarization
5823.38	-56.27	1.40	13.10	-46.72	-13.00	V
6679.00	-59.21	1.80	12.40	-50.76	-13.00	V
7360.86	-59.68	1.70	12.00	-51.53	-13.00	V
8041.86	-57.83	2.00	11.30	-50.68	-13.00	V
8835.86	-59.23	1.90	12.00	-51.28	-13.00	V
9311.71	-57.75	2.00	11.60	-50.30	-13.00	V

**n7, 5MHz, DFT-OFDM, QPSK, Channel 500500**

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Polarization
4085.25	-59.30	1.30	12.40	-48.20	-25.00	H
5276.62	-54.98	1.60	12.50	-44.08	-25.00	H
6249.23	-59.13	1.60	13.10	-47.63	-25.00	H
8753.54	-57.34	1.90	12.00	-47.24	-25.00	H
11814.00	-53.95	2.50	11.00	-45.45	-25.00	H
16636.15	-53.81	2.60	16.50	-39.91	-25.00	H

n7, 5MHz, DFT-OFDM, QPSK, Channel 507000

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Polarization
5439.00	-55.48	1.30	12.50	-44.28	-25.00	H
8012.31	-57.70	2.00	11.30	-48.40	-25.00	H
10762.15	-56.52	2.40	10.80	-48.12	-25.00	H
13031.54	-56.95	2.30	13.30	-45.95	-25.00	H
15572.77	-56.50	2.40	15.60	-43.30	-25.00	H
17350.62	-51.23	3.20	14.50	-39.93	-25.00	H

n7, 5MHz, DFT-OFDM, QPSK, Channel 513500

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Polarization
4093.88	-59.23	1.30	12.40	-48.13	-25.00	H
5413.12	-55.33	1.20	12.50	-44.03	-25.00	H
7524.00	-58.22	1.90	11.30	-48.82	-25.00	H
9354.92	-57.78	2.00	11.60	-48.18	-25.00	H
11649.69	-54.97	2.60	11.00	-46.57	-25.00	H
16775.08	-54.60	2.90	16.50	-41.00	-25.00	H

**n38, 10MHz, DFT-OFDM, QPSK, Channel 515000**

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Polarization
5340.00	-55.51	1.30	12.50	-44.31	-25.00	V
7512.92	-58.13	1.90	11.30	-48.73	-25.00	V
9280.62	-57.81	2.10	11.60	-48.31	-25.00	V
12372.00	-55.10	2.60	12.60	-45.10	-25.00	V
14946.46	-52.12	2.70	11.20	-43.62	-25.00	V
16920.46	-54.16	2.90	16.50	-40.56	-25.00	V

n38, 10MHz, DFT-OFDM, QPSK, Channel 519000

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Polarization
5274.75	-55.35	1.60	12.50	-44.45	-25.00	V
7502.77	-58.06	1.90	11.30	-48.66	-25.00	V
8923.85	-59.16	1.90	12.00	-49.06	-25.00	V
10319.54	-57.38	2.10	11.30	-48.18	-25.00	V
12920.77	-56.68	2.50	13.80	-45.38	-25.00	V
14951.54	-51.44	2.70	11.20	-42.94	-25.00	V

n38, 10MHz, DFT-OFDM, QPSK, Channel 523000

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Polarization
4252.50	-59.10	1.20	12.40	-47.90	-25.00	V
5341.12	-55.74	1.30	12.50	-44.54	-25.00	V
6928.62	-58.98	1.80	12.40	-48.38	-25.00	V
8069.08	-57.83	2.00	11.30	-48.53	-25.00	V
11059.38	-55.05	2.30	10.50	-46.85	-25.00	V
16739.54	-53.43	2.90	16.50	-39.83	-25.00	V

**n41, 10MHz, DFT-OFDM, QPSK, Channel 500202**

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Polarization
5821.12	-56.25	1.40	13.10	-44.55	-25.00	H
7491.69	-54.04	1.90	12.00	-43.94	-25.00	H
9217.85	-58.05	2.10	11.60	-48.55	-25.00	H
11679.69	-54.90	2.60	11.00	-46.50	-25.00	H
13564.62	-55.03	2.40	12.40	-45.03	-25.00	H
16631.54	-53.49	2.60	16.50	-39.59	-25.00	H

n41, 10MHz, DFT-OFDM, QPSK, Channel 518598

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Polarization
5473.12	-55.39	1.30	12.50	-44.19	-25.00	H
7767.69	-51.85	1.80	11.30	-42.35	-25.00	H
9320.31	-57.36	2.00	11.60	-47.76	-25.00	H
11963.54	-55.01	2.60	11.00	-46.61	-25.00	H
15646.62	-54.12	2.70	15.60	-41.22	-25.00	H
16616.77	-54.37	2.60	16.50	-40.47	-25.00	H

n41, 10MHz, DFT-OFDM, QPSK, Channel 537000

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Polarization
5342.62	-54.76	1.30	12.50	-43.56	-25.00	H
5672.25	-57.08	1.30	13.10	-45.28	-25.00	H
8043.69	-52.04	2.00	11.30	-42.74	-25.00	H
9100.15	-57.57	2.20	11.60	-48.17	-25.00	H
11753.08	-54.08	2.60	11.00	-45.68	-25.00	H
16721.54	-53.52	2.90	16.50	-39.92	-25.00	H

**n66, 5MHz, DFT-OFDM, QPSK, Channel 342500**

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Polarization
5276.62	-64.73	1.60	12.50	-53.83	-13.00	H
7495.12	-68.92	1.90	12.00	-58.82	-13.00	H
9844.61	-67.30	2.30	11.20	-58.40	-13.00	H
12750.00	-66.36	2.60	13.80	-55.16	-13.00	H
15568.38	-65.61	2.40	15.60	-52.41	-13.00	H
17151.69	-61.50	2.90	14.50	-49.90	-13.00	H

n66, 5MHz, DFT-OFDM, QPSK, Channel 349000

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Polarization
4104.38	-67.85	1.30	12.40	-56.75	-13.00	H
5539.12	-65.15	1.40	13.10	-53.45	-13.00	H
6941.62	-68.58	1.80	12.40	-57.98	-13.00	H
8087.20	-68.09	1.80	11.30	-58.59	-13.00	H
11679.16	-64.84	2.60	11.00	-56.44	-13.00	H
16628.88	-63.18	2.60	16.50	-49.28	-13.00	H

n66, 5MHz, DFT-OFDM, QPSK, Channel 355500

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Polarization
7918.93	-68.64	1.70	11.30	-59.04	-13.00	H
9218.79	-67.73	2.10	11.60	-58.23	-13.00	H
11038.39	-65.85	2.30	10.50	-57.65	-13.00	H
12569.68	-67.41	2.40	13.80	-56.01	-13.00	H
13996.00	-64.14	2.50	12.40	-54.24	-13.00	H
16719.88	-63.12	2.90	16.50	-49.52	-13.00	H

**DC_7A_n2A, 5MHz+5MHz, DFT-OFDM, QPSK, NR Channel 370500**

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Polarization
4073.62	-59.08	1.30	12.40	-47.98	-13.00	H
5322.38	-56.56	1.30	12.50	-45.36	-13.00	H
6575.08	-59.85	1.70	12.40	-49.15	-13.00	H
9314.77	-58.34	2.00	11.60	-48.74	-13.00	H
12306.92	-54.88	2.60	12.60	-44.88	-13.00	H
16543.38	-55.29	2.70	16.50	-41.49	-13.00	H

DC_7A_n2A, 5MHz+5MHz, DFT-OFDM, QPSK, NR Channel 376000

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Polarization
4262.62	-59.22	1.20	12.40	-48.02	-13.00	H
5406.38	-54.87	1.20	12.50	-43.57	-13.00	H
6941.08	-56.90	1.80	12.40	-46.30	-13.00	H
9257.54	-58.10	2.10	11.60	-48.60	-13.00	H
12020.31	-56.62	2.60	12.60	-46.62	-13.00	H
16710.92	-53.86	2.90	16.50	-40.26	-13.00	H

DC_7A_n2A, 5MHz+5MHz, DFT-OFDM, QPSK, NR Channel 381500

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Polarization
5031.75	-57.16	1.30	12.50	-45.96	-13.00	H
6944.77	-58.71	1.80	12.40	-48.11	-13.00	H
9228.46	-58.19	2.10	11.60	-48.69	-13.00	H
11130.00	-54.20	2.50	10.50	-46.20	-13.00	H
12740.77	-56.71	2.60	13.80	-45.51	-13.00	H
14944.15	-52.42	2.70	11.20	-43.92	-13.00	H

**DC_66A_n5A, 1.4MHz+5MHz, DFT-OFDM, QPSK, NR Channel 165300**

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak ERP(dBm)	Limit (dBm)	Polarization
2473.46	-53.96	0.90	9.80	-47.21	-13.00	V
2681.04	-57.31	1.00	10.70	-49.76	-13.00	V
2861.30	-61.04	1.00	10.70	-53.49	-13.00	V
3848.25	-60.12	1.20	12.20	-51.27	-13.00	V
5416.50	-55.68	1.20	12.50	-46.53	-13.00	V
8649.43	-59.00	2.00	12.00	-51.15	-13.00	V

DC_66A_n5A, 1.4MHz+5MHz, DFT-OFDM, QPSK, NR Channel 167300

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak ERP(dBm)	Limit (dBm)	Polarization
2503.39	-53.46	0.90	10.70	-45.81	-13.00	V
2671.54	-58.01	1.00	10.70	-50.46	-13.00	V
3421.50	-55.93	1.20	11.50	-47.78	-13.00	V
5031.38	-56.27	1.30	12.50	-47.22	-13.00	V
6739.71	-58.66	1.70	12.40	-50.11	-13.00	V
7986.00	-59.01	1.90	11.30	-51.76	-13.00	V

DC_66A_n5A, 1.4MHz+5MHz, DFT-OFDM, QPSK, NR Channel 169300

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak ERP(dBm)	Limit (dBm)	Polarization
2533.79	-50.96	0.90	10.70	-43.31	-13.00	V
2660.85	-48.64	1.00	10.70	-41.09	-13.00	V
3441.75	-49.51	1.10	11.50	-41.26	-13.00	V
4350.38	-54.06	1.30	12.40	-45.11	-13.00	V
6952.71	-58.78	1.80	12.40	-50.33	-13.00	V
9685.29	-57.69	2.20	11.20	-50.84	-13.00	V

**DC_2A_n7A, 1.4MHz+5MHz, DFT-OFDM, QPSK, NR Channel 500500**

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Polarization
5362.88	-56.24	1.30	12.50	-45.04	-25.00	H
6738.00	-59.51	1.70	12.40	-48.81	-25.00	H
7500.92	-54.63	1.90	11.30	-45.23	-25.00	H
9369.69	-58.04	2.00	11.60	-48.44	-25.00	H
11110.62	-55.12	2.30	10.50	-46.92	-25.00	H
12760.62	-55.81	2.60	13.80	-44.61	-25.00	H

DC_2A_n7A, 1.4MHz+5MHz, DFT-OFDM, QPSK, NR Channel 507000

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Polarization
4784.25	-58.83	1.30	12.50	-47.63	-25.00	H
5816.62	-56.66	1.50	13.10	-45.06	-25.00	H
7598.77	-51.93	1.80	11.30	-42.43	-25.00	H
9775.85	-57.19	2.30	11.20	-48.29	-25.00	H
12372.00	-55.80	2.60	12.60	-45.80	-25.00	H
17167.38	-51.99	2.90	14.50	-40.39	-25.00	H

DC_2A_n7A, 1.4MHz+5MHz, DFT-OFDM, QPSK, NR Channel 513500

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Polarization
5131.12	-52.33	1.30	12.50	-41.13	-25.00	H
5788.50	-57.33	1.50	13.10	-45.73	-25.00	H
6279.23	-59.46	1.60	13.10	-47.96	-25.00	H
7696.62	-53.00	1.80	11.30	-43.50	-25.00	H
9258.92	-58.05	2.10	11.60	-48.55	-25.00	H
12191.08	-57.16	2.60	12.60	-47.16	-25.00	H

**DC_5A_n7A, 1.4MHz+5MHz, DFT-OFDM, QPSK, NR Channel 500500**

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Polarization
8078.14	-63.06	2.00	11.30	-53.76	-25.00	V
9396.86	-63.57	2.10	11.60	-54.07	-25.00	H
11767.71	-58.34	2.60	11.00	-49.94	-25.00	H
14216.57	-57.02	2.50	11.90	-47.62	-25.00	H
15909.00	-56.89	2.60	15.60	-43.89	-25.00	V
16631.57	-54.17	2.60	16.50	-40.27	-25.00	H

DC_5A_n7A, 1.4MHz+5MHz, DFT-OFDM, QPSK, NR Channel 507000

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Polarization
7598.57	-54.90	1.80	11.30	-45.40	-25.00	V
10622.57	-61.15	2.20	10.80	-52.55	-25.00	V
12569.14	-61.85	2.40	13.80	-50.45	-25.00	H
14328.00	-56.79	2.60	11.90	-47.49	-25.00	V
16615.29	-55.25	2.60	16.50	-41.35	-25.00	V
17677.71	-49.37	3.30	12.80	-39.87	-25.00	V

DC_5A_n7A, 1.4MHz+5MHz, DFT-OFDM, QPSK, NR Channel 513500

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Polarization
8360.57	-63.50	1.80	11.30	-54.00	-25.00	V
9945.00	-62.12	2.20	11.20	-53.12	-25.00	V
11755.71	-58.19	2.60	11.00	-49.79	-25.00	V
13582.29	-58.26	2.40	12.40	-48.26	-25.00	H
14952.86	-54.67	2.70	11.20	-46.17	-25.00	V
16629.00	-54.80	2.60	16.50	-40.90	-25.00	V

**DC_5A_n38A, 1.4MHz+10MHz, DFT-OFDM, QPSK, NR Channel 515000**

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Polarization
6008.14	-69.91	1.50	13.10	-58.31	-25.00	H
7713.43	-63.19	1.80	11.30	-53.69	-25.00	H
10621.29	-67.98	2.20	10.80	-59.38	-25.00	H
11794.71	-65.72	2.60	11.00	-57.32	-25.00	H
15008.14	-64.65	2.40	12.40	-54.65	-25.00	V
16629.43	-64.94	2.60	16.50	-51.04	-25.00	V

DC_5A_n38A, 1.4MHz+10MHz, DFT-OFDM, QPSK, NR Channel 519000

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Polarization
6039.86	-70.26	1.50	13.10	-58.66	-25.00	H
7773.43	-66.91	1.80	11.30	-57.41	-25.00	H
10614.43	-67.93	2.20	10.80	-59.33	-25.00	V
12746.14	-67.35	2.60	13.80	-56.15	-25.00	H
15012.43	-64.86	2.40	12.40	-54.86	-25.00	H
17697.43	-60.29	3.30	12.80	-50.79	-25.00	V

DC_5A_n38A, 1.4MHz+10MHz, DFT-OFDM, QPSK, NR Channel 523000

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Polarization
5417.25	-66.75	1.20	12.50	-55.45	-25.00	H
6000.00	-69.83	1.50	13.10	-58.23	-25.00	H
7833.43	-62.76	1.80	11.30	-53.26	-25.00	H
10647.00	-67.45	2.20	10.80	-58.85	-25.00	H
12733.29	-67.78	2.60	13.80	-56.58	-25.00	H
16694.14	-65.01	2.60	16.50	-51.11	-25.00	V

**DC_4A_n41A, 1.4MHz+10MHz, DFT-OFDM, QPSK, NR Channel 500202**

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Polarization
5019.75	-56.75	1.30	12.50	-45.55	-25.00	H
5392.50	-56.34	1.20	12.50	-45.04	-25.00	H
7491.23	-54.84	1.90	12.00	-44.74	-25.00	H
10201.85	-57.57	2.20	11.30	-48.47	-25.00	H
13156.62	-57.11	2.30	13.30	-46.11	-25.00	H
16617.23	-53.87	2.60	16.50	-39.97	-25.00	H

DC_4A_n41A, 1.4MHz+10MHz, DFT-OFDM, QPSK, NR Channel 518598

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Polarization
4819.12	-58.39	1.30	12.50	-47.19	-25.00	H
5398.50	-55.51	1.20	12.50	-44.21	-25.00	H
7767.23	-52.13	1.80	11.30	-42.63	-25.00	H
9177.23	-58.45	2.10	11.60	-48.95	-25.00	H
11724.46	-54.45	2.60	11.00	-46.05	-25.00	H
16592.31	-55.20	2.60	16.50	-41.30	-25.00	H

DC_4A_n41A, 1.4MHz+10MHz, DFT-OFDM, QPSK, NR Channel 537000

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Polarization
5537.62	-56.31	1.40	13.10	-44.61	-25.00	H
6953.54	-58.58	1.80	12.40	-47.98	-25.00	H
8043.23	-52.14	2.00	11.30	-42.84	-25.00	H
10386.46	-57.48	2.30	11.30	-48.48	-25.00	H
13542.92	-54.85	2.50	12.40	-44.95	-25.00	H
15657.23	-55.00	2.70	15.60	-42.10	-25.00	H

**DC_26A_n41A, 1.4MHz+10MHz, DFT-OFDM, QPSK, NR Channel 500202**

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Polarization
4556.62	-59.06	1.30	12.50	-47.86	-25.00	H
5511.00	-55.93	1.40	13.10	-44.23	-25.00	H
7491.69	-57.44	1.90	12.00	-47.34	-25.00	H
9195.23	-57.96	2.10	11.60	-48.46	-25.00	H
11700.00	-55.01	2.60	11.00	-46.61	-25.00	H
16625.54	-53.67	2.60	16.50	-39.77	-25.00	H

DC_26A_n41A, 1.4MHz+10MHz, DFT-OFDM, QPSK, NR Channel 518598

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Polarization
5387.25	-56.27	1.20	12.50	-44.97	-25.00	H
7767.69	-50.78	1.80	11.30	-41.28	-25.00	H
9777.69	-57.22	2.30	11.20	-48.32	-25.00	H
11898.46	-55.36	2.50	11.00	-46.86	-25.00	H
13348.62	-55.96	2.30	13.30	-44.96	-25.00	H
15568.15	-55.64	2.40	15.60	-42.44	-25.00	H

DC_26A_n41A, 1.4MHz+10MHz, DFT-OFDM, QPSK, NR Channel 537000

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Polarization
4701.00	-58.93	1.30	12.50	-47.73	-25.00	H
5521.12	-56.17	1.40	13.10	-44.47	-25.00	H
8043.23	-52.90	2.00	11.30	-43.60	-25.00	H
9956.31	-57.85	2.20	11.20	-48.85	-25.00	H
12744.92	-56.22	2.60	13.80	-45.02	-25.00	H
16889.08	-53.89	2.90	16.50	-40.29	-25.00	H

**DC_12A_n66A, 1.4MHz+5MHz, DFT-OFDM, QPSK, NR Channel 342500**

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Polarization
5131.50	-57.89	1.30	12.50	-46.69	-13.00	H
6918.96	-68.79	1.80	12.40	-58.19	-13.00	H
9215.41	-67.50	2.10	11.60	-58.00	-13.00	H
11820.91	-64.25	2.50	11.00	-55.75	-13.00	H
14950.19	-61.60	2.70	11.20	-53.10	-13.00	H
16896.63	-63.49	2.90	16.50	-49.89	-13.00	H

DC_12A_n66A, 1.4MHz+5MHz, DFT-OFDM, QPSK, NR Channel 349000

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Polarization
5229.00	-52.58	1.80	12.50	-41.88	-13.00	H
6939.21	-68.18	1.80	12.40	-57.58	-13.00	H
8740.02	-68.79	2.00	12.00	-58.79	-13.00	H
12323.79	-66.06	2.60	12.60	-56.06	-13.00	H
15030.69	-63.86	2.40	12.40	-53.86	-13.00	H
16632.38	-63.01	2.60	16.50	-49.11	-13.00	H

DC_12A_n66A, 1.4MHz+5MHz, DFT-OFDM, QPSK, NR Channel 355500

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Polarization
5326.88	-56.42	1.30	12.50	-45.22	-13.00	H
7457.52	-68.64	1.90	12.00	-58.54	-13.00	H
9349.45	-67.98	2.00	11.60	-58.38	-13.00	H
11759.20	-64.45	2.60	11.00	-56.05	-13.00	H
15030.69	-64.01	2.40	12.40	-54.01	-13.00	H
16689.69	-63.34	2.60	16.50	-49.44	-13.00	H

**Lower antenna****n2, 5MHz, DFT-OFDM, QPSK, Channel 370500**

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Polarization
4100.25	-58.88	1.30	12.40	-47.78	-13.00	H
5313.00	-55.55	1.60	12.50	-44.65	-13.00	H
8052.00	-57.64	2.00	11.30	-48.34	-13.00	H
10191.69	-57.94	2.20	11.30	-48.84	-13.00	H
14257.38	-54.82	2.60	11.90	-45.52	-13.00	H
16631.08	-53.97	2.60	16.50	-40.07	-13.00	H

n2, 5MHz, DFT-OFDM, QPSK, Channel 376000

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Polarization
8119.85	-58.57	1.80	11.30	-49.07	-13.00	H
9631.38	-58.04	2.10	11.20	-48.94	-13.00	H
11097.69	-54.62	2.30	10.50	-46.42	-13.00	H
12812.31	-57.01	2.70	13.80	-45.91	-13.00	H
14976.92	-52.21	2.40	11.20	-43.41	-13.00	H
16688.31	-53.78	2.60	16.50	-39.88	-13.00	H

n2, 5MHz, DFT-OFDM, QPSK, Channel 381500

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Polarization
4434.00	-57.80	1.30	12.40	-46.70	-13.00	H
5471.62	-55.83	1.30	12.50	-44.63	-13.00	H
6940.15	-58.52	1.80	12.40	-47.92	-13.00	H
9211.85	-57.75	2.10	11.60	-48.25	-13.00	H
11748.00	-54.70	2.60	11.00	-46.30	-13.00	H
16127.08	-56.20	2.60	17.40	-41.40	-13.00	H

**n5, 5MHz, DFT-OFDM, QPSK, Channel 165300**

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak ERP(dBm)	Limit (dBm)	Polarization
5428.88	-56.35	1.30	12.50	-47.30	-13.00	V
6480.14	-59.96	1.60	13.10	-50.61	-13.00	V
7374.29	-59.53	1.70	12.00	-51.38	-13.00	V
8043.43	-57.80	2.00	11.30	-50.65	-13.00	V
8751.00	-58.06	2.00	12.00	-50.21	-13.00	V
9764.71	-57.75	2.30	11.20	-51.00	-13.00	V

n5, 5MHz, DFT-OFDM, QPSK, Channel 167300

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak ERP(dBm)	Limit (dBm)	Polarization
5332.50	-55.81	1.30	12.50	-46.76	-13.00	V
6461.00	-60.58	1.60	13.10	-51.23	-13.00	V
7384.86	-59.38	1.70	12.00	-51.23	-13.00	V
7984.71	-57.50	1.90	11.30	-50.25	-13.00	V
8739.86	-57.91	2.00	12.00	-50.06	-13.00	V
9354.57	-58.23	2.00	11.60	-50.78	-13.00	V

n5, 5MHz, DFT-OFDM, QPSK, Channel 169300

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak ERP(dBm)	Limit (dBm)	Polarization
5284.12	-53.84	1.60	12.50	-45.09	-13.00	V
6421.57	-59.37	1.60	13.10	-50.02	-13.00	V
7420.86	-59.79	1.90	12.00	-51.84	-13.00	V
8434.86	-58.90	1.80	11.30	-51.55	-13.00	V
9324.00	-57.99	2.00	11.60	-50.54	-13.00	V
9861.14	-58.03	2.20	11.20	-51.18	-13.00	V

n7, 5MHz, DFT-OFDM, QPSK, Channel 500500

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Polarization
5255.25	-55.24	1.80	12.50	-44.54	-25.00	H
5970.38	-56.78	1.50	13.10	-45.18	-25.00	H
6924.92	-58.20	1.80	12.40	-47.60	-25.00	H
9216.00	-57.82	2.10	11.60	-48.32	-25.00	H
11813.54	-53.74	2.50	11.00	-45.24	-25.00	H
16923.69	-53.66	2.90	16.50	-40.06	-25.00	H

n7, 5MHz, DFT-OFDM, QPSK, Channel 507000

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Polarization
5291.62	-54.95	1.60	12.50	-44.05	-25.00	H
6939.69	-58.97	1.80	12.40	-48.37	-25.00	H
8772.00	-59.34	1.90	12.00	-49.24	-25.00	H
10698.92	-55.66	2.40	10.80	-47.26	-25.00	H
14352.92	-53.95	2.60	11.90	-44.65	-25.00	H
16612.62	-52.70	2.60	16.50	-38.80	-25.00	H

n7, 5MHz, DFT-OFDM, QPSK, Channel 513500

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Polarization
5305.12	-55.14	1.60	12.50	-44.24	-25.00	H
6429.69	-60.36	1.60	13.10	-48.86	-25.00	H
8017.85	-58.38	2.00	11.30	-49.08	-25.00	H
10654.15	-56.38	2.20	10.80	-47.78	-25.00	H
12386.77	-55.52	2.60	12.60	-45.52	-25.00	H
16093.38	-55.53	2.60	17.40	-40.73	-25.00	H

**n38, 10MHz, DFT-OFDM, QPSK, Channel 515000**

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Polarization
4106.25	-59.65	1.30	12.40	-48.55	-25.00	V
5356.50	-56.12	1.30	12.50	-44.92	-25.00	V
6944.31	-57.93	1.80	12.40	-47.33	-25.00	V
8383.38	-58.80	1.80	11.30	-49.30	-25.00	V
9256.62	-57.97	2.10	11.60	-48.47	-25.00	V
12364.62	-55.65	2.60	12.60	-45.65	-25.00	V

n38, 10MHz, DFT-OFDM, QPSK, Channel 519000

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Polarization
3669.75	-60.13	1.20	12.20	-49.13	-25.00	V
4431.38	-57.61	1.30	12.40	-46.51	-25.00	V
6778.62	-59.43	1.60	12.40	-48.63	-25.00	V
10417.85	-57.91	2.30	11.30	-48.91	-25.00	V
12749.08	-55.97	2.60	13.80	-44.77	-25.00	V
16695.23	-53.56	2.60	16.50	-39.66	-25.00	V

n38, 10MHz, DFT-OFDM, QPSK, Channel 523000

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Polarization
4834.88	-58.25	1.30	12.50	-47.05	-25.00	V
6866.31	-59.98	1.80	12.40	-49.38	-25.00	V
8786.31	-58.45	1.90	12.00	-48.35	-25.00	V
11784.00	-54.66	2.60	11.00	-46.26	-25.00	V
14197.38	-54.81	2.50	11.90	-45.41	-25.00	V
17342.77	-50.85	3.20	14.50	-39.55	-25.00	V

**n41, 10MHz, DFT-OFDM, QPSK, Channel 500202**

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Polarization
5479.50	-55.26	1.30	12.50	-44.06	-25.00	H
6948.46	-58.77	1.80	12.40	-48.17	-25.00	H
8011.38	-58.41	2.00	11.30	-49.11	-25.00	H
11714.77	-54.38	2.60	11.00	-45.98	-25.00	H
13969.85	-54.83	2.50	12.40	-44.93	-25.00	H
16580.77	-54.65	2.60	16.50	-40.75	-25.00	H

n41, 10MHz, DFT-OFDM, QPSK, Channel 518598

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Polarization
5436.00	-55.48	1.30	12.50	-44.28	-25.00	H
7995.23	-57.71	1.90	11.30	-48.31	-25.00	H
10273.38	-57.71	2.10	11.30	-48.51	-25.00	H
12921.23	-55.95	2.50	13.80	-44.65	-25.00	H
16727.08	-53.46	2.90	16.50	-39.86	-25.00	H
17998.15	-49.10	3.20	12.80	-39.50	-25.00	H

n41, 10MHz, DFT-OFDM, QPSK, Channel 537000

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Polarization
4249.88	-58.63	1.20	12.40	-47.43	-25.00	H
5350.12	-55.65	1.30	12.50	-44.45	-25.00	H
6957.23	-58.05	1.80	12.40	-47.45	-25.00	H
9313.85	-57.73	2.00	11.60	-48.13	-25.00	H
12344.31	-54.93	2.60	12.60	-44.93	-25.00	H
17334.46	-51.32	3.20	14.50	-40.02	-25.00	H

**n66, 5MHz, DFT-OFDM, QPSK, Channel 342500**

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Polarization
9199.98	-68.02	2.10	11.60	-58.52	-13.00	H
10290.59	-67.14	2.10	11.30	-57.94	-13.00	H
11791.50	-64.47	2.60	11.00	-56.07	-13.00	H
14544.62	-63.18	2.60	11.20	-54.58	-13.00	H
16397.44	-64.89	2.70	17.40	-50.19	-13.00	H
17355.56	-59.92	3.20	14.50	-48.62	-13.00	H

n66, 5MHz, DFT-OFDM, QPSK, Channel 349000

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Polarization
5229.00	-63.22	1.80	12.50	-52.52	-13.00	H
6945.96	-68.46	1.80	12.40	-57.86	-13.00	H
9299.30	-68.73	2.00	11.60	-59.13	-13.00	H
11818.50	-65.35	2.50	11.00	-56.85	-13.00	H
14559.06	-63.33	2.60	11.20	-54.73	-13.00	H
16718.12	-63.29	2.90	16.50	-49.69	-13.00	H

n66, 5MHz, DFT-OFDM, QPSK, Channel 355500

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Polarization
8916.96	-69.39	1.90	12.00	-59.29	-13.00	H
10322.41	-67.43	2.10	11.30	-58.23	-13.00	H
12338.25	-65.64	2.60	12.60	-55.64	-13.00	H
14355.62	-64.13	2.60	11.90	-54.83	-13.00	H
16687.94	-63.28	2.60	16.50	-49.38	-13.00	H
17684.12	-59.27	3.30	12.80	-49.77	-13.00	H

**DC_7A_n2A, 5MHz+5MHz, DFT-OFDM, QPSK, NR Channel 370500**

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Polarization
4102.50	-58.24	1.30	12.40	-47.14	-13.00	H
5264.25	-55.11	1.80	12.50	-44.41	-13.00	H
8043.23	-57.99	2.00	11.30	-48.69	-13.00	H
11771.08	-54.38	2.60	11.00	-45.98	-13.00	H
12795.69	-56.98	2.70	13.80	-45.88	-13.00	H
15660.00	-53.75	2.70	15.60	-40.85	-13.00	H

DC_7A_n2A, 5MHz+5MHz, DFT-OFDM, QPSK, NR Channel 376000

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Polarization
3949.50	-59.56	1.20	12.20	-48.56	-13.00	H
4992.00	-56.88	1.30	12.50	-45.68	-13.00	H
7493.54	-58.53	1.90	12.00	-48.43	-13.00	H
9005.08	-59.86	2.00	11.60	-50.26	-13.00	H
10599.69	-56.41	2.20	10.80	-47.81	-13.00	H
15623.08	-55.03	2.70	15.60	-42.13	-13.00	H

DC_7A_n2A, 5MHz+5MHz, DFT-OFDM, QPSK, NR Channel 381500

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Polarization
5389.12	-56.27	1.20	12.50	-44.97	-13.00	H
7530.00	-57.84	1.90	11.30	-48.44	-13.00	H
8772.92	-59.31	1.90	12.00	-49.21	-13.00	H
10701.69	-56.02	2.40	10.80	-47.62	-13.00	H
13978.15	-55.44	2.50	12.40	-45.54	-13.00	H
16659.69	-53.58	2.60	16.50	-39.68	-13.00	H

**DC_66A_n5A, 1.4MHz+5MHz, DFT-OFDM, QPSK, NR Channel 165300**

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak ERP(dBm)	Limit (dBm)	Polarization
2153.79	-54.94	0.90	9.80	-48.19	-13.00	V
3159.00	-60.08	1.00	11.50	-51.73	-13.00	V
5365.50	-56.07	1.30	12.50	-47.02	-13.00	V
8628.43	-59.38	2.00	12.00	-51.53	-13.00	V
11714.14	-53.71	2.60	11.00	-47.46	-13.00	V
16752.43	-53.52	2.90	16.50	-42.07	-13.00	V

DC_66A_n5A, 1.4MHz+5MHz, DFT-OFDM, QPSK, NR Channel 167300

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak ERP(dBm)	Limit (dBm)	Polarization
2153.31	-54.64	0.90	9.80	-47.89	-13.00	V
3579.38	-61.40	1.10	12.20	-52.45	-13.00	V
5578.50	-56.22	1.40	13.10	-46.67	-13.00	V
7992.43	-58.45	1.90	11.30	-51.20	-13.00	V
11094.86	-55.31	2.30	10.50	-49.26	-13.00	V
16629.86	-53.48	2.60	16.50	-41.73	-13.00	V

DC_66A_n5A, 1.4MHz+5MHz, DFT-OFDM, QPSK, NR Channel 169300

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak ERP(dBm)	Limit (dBm)	Polarization
2153.55	-54.47	0.90	9.80	-47.72	-13.00	V
4245.75	-59.21	1.20	12.40	-50.16	-13.00	V
5414.25	-55.83	1.20	12.50	-46.68	-13.00	V
8790.00	-58.78	1.90	12.00	-50.83	-13.00	V
11860.71	-55.00	2.50	11.00	-48.65	-13.00	V
15672.00	-54.45	2.70	15.60	-43.70	-13.00	V

**DC_2A_n7A, 1.4MHz+5MHz, DFT-OFDM, QPSK, NR Channel 500500**

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Polarization
4286.62	-58.92	1.20	12.40	-47.72	-25.00	H
5589.75	-56.61	1.40	13.10	-44.91	-25.00	H
7501.85	-49.35	1.90	11.30	-39.95	-25.00	H
9366.46	-58.41	2.00	11.60	-48.81	-25.00	H
12356.77	-55.22	2.60	12.60	-45.22	-25.00	H
14977.38	-52.75	2.40	11.20	-43.95	-25.00	H

DC_2A_n7A, 1.4MHz+5MHz, DFT-OFDM, QPSK, NR Channel 507000

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Polarization
4485.00	-58.54	1.20	12.40	-47.34	-25.00	H
5527.12	-56.26	1.40	13.10	-44.56	-25.00	H
7598.77	-49.47	1.80	11.30	-39.97	-25.00	H
11804.77	-54.56	2.50	11.00	-46.06	-25.00	H
15003.23	-54.11	2.40	12.40	-44.11	-25.00	H
16762.62	-53.88	2.90	16.50	-40.28	-25.00	H

DC_2A_n7A, 1.4MHz+5MHz, DFT-OFDM, QPSK, NR Channel 513500

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Polarization
4260.00	-59.28	1.20	12.40	-48.08	-25.00	H
5416.88	-56.28	1.20	12.50	-44.98	-25.00	H
7696.15	-49.55	1.80	11.30	-40.05	-25.00	H
9990.92	-58.47	2.20	11.20	-49.47	-25.00	H
11796.92	-54.53	2.50	11.00	-46.03	-25.00	H
16652.31	-54.50	2.60	16.50	-40.60	-25.00	H

**DC_5A_n7A, 1.4MHz+5MHz, DFT-OFDM, QPSK, NR Channel 500500**

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Polarization
7501.29	-56.47	1.90	11.30	-47.07	-25.00	V
9015.43	-63.91	2.00	11.60	-54.31	-25.00	H
10158.86	-61.72	2.00	11.30	-52.42	-25.00	V
12752.57	-59.87	2.60	13.80	-48.67	-25.00	V
14694.86	-56.49	2.50	11.20	-47.79	-25.00	H
16620.00	-55.28	2.60	16.50	-41.38	-25.00	V

DC_5A_n7A, 1.4MHz+5MHz, DFT-OFDM, QPSK, NR Channel 507000

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Polarization
7598.57	-57.55	1.80	11.30	-48.05	-25.00	V
10052.14	-62.50	2.20	11.30	-53.40	-25.00	V
12736.29	-60.04	2.60	13.80	-48.84	-25.00	H
14225.14	-57.38	2.50	11.90	-47.98	-25.00	V
16592.14	-55.03	2.60	16.50	-41.13	-25.00	V
17698.29	-49.45	3.30	12.80	-39.95	-25.00	V

DC_5A_n7A, 1.4MHz+5MHz, DFT-OFDM, QPSK, NR Channel 513500

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Polarization
10570.29	-61.51	2.30	10.80	-53.01	-25.00	V
11936.14	-58.60	2.60	11.00	-50.20	-25.00	V
13325.57	-59.53	2.30	13.30	-48.53	-25.00	V
14948.14	-54.11	2.70	11.20	-45.61	-25.00	V
16597.71	-55.19	2.60	16.50	-41.29	-25.00	V
17696.14	-49.19	3.30	12.80	-39.69	-25.00	V

**DC_5A_n38A, 1.4MHz+10MHz, DFT-OFDM, QPSK, NR Channel 515000**

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Polarization
6000.00	-69.87	1.50	13.10	-58.27	-25.00	H
7713.43	-68.09	1.80	11.30	-58.59	-25.00	H
10295.57	-68.71	2.10	11.30	-59.51	-25.00	V
12363.43	-66.51	2.60	12.60	-56.51	-25.00	H
15007.71	-64.74	2.40	12.40	-54.74	-25.00	V
16629.00	-64.86	2.60	16.50	-50.96	-25.00	H

DC_5A_n38A, 1.4MHz+10MHz, DFT-OFDM, QPSK, NR Channel 519000

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Polarization
6020.14	-70.42	1.50	13.10	-58.82	-25.00	V
7773.00	-66.46	1.80	11.30	-56.96	-25.00	V
10292.57	-68.71	2.10	11.30	-59.51	-25.00	V
12740.57	-67.63	2.60	13.80	-56.43	-25.00	V
14971.71	-63.37	2.70	11.20	-54.87	-25.00	H
16599.00	-65.65	2.60	16.50	-51.75	-25.00	V

DC_5A_n38A, 1.4MHz+10MHz, DFT-OFDM, QPSK, NR Channel 523000

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Polarization
6413.14	-71.34	1.60	13.10	-59.84	-25.00	H
7833.43	-64.88	1.80	11.30	-55.38	-25.00	H
10320.00	-68.56	2.10	11.30	-59.36	-25.00	V
11778.43	-65.55	2.60	11.00	-57.15	-25.00	V
15327.00	-65.32	2.70	12.40	-55.62	-25.00	H
16688.57	-64.78	2.60	16.50	-50.88	-25.00	H

**DC_4A_n41A, 1.4MHz+10MHz, DFT-OFDM, QPSK, NR Channel 500202**

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Polarization
5397.00	-55.68	1.20	12.50	-44.38	-25.00	H
7491.69	-53.70	1.90	12.00	-43.60	-25.00	H
9377.54	-58.41	2.00	11.60	-48.81	-25.00	H
11808.00	-53.53	2.50	11.00	-45.03	-25.00	H
14993.08	-52.53	2.40	11.20	-43.73	-25.00	H
16891.38	-54.27	2.90	16.50	-40.67	-25.00	H

DC_4A_n41A, 1.4MHz+10MHz, DFT-OFDM, QPSK, NR Channel 518598

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Polarization
5586.75	-56.28	1.40	13.10	-44.58	-25.00	H
7767.23	-49.21	1.80	11.30	-39.71	-25.00	H
11164.15	-55.36	2.50	10.50	-47.36	-25.00	H
12282.46	-57.12	2.60	12.60	-47.12	-25.00	H
14972.77	-52.33	2.70	11.20	-43.83	-25.00	H
16922.31	-54.17	2.90	16.50	-40.57	-25.00	H

DC_4A_n41A, 1.4MHz+10MHz, DFT-OFDM, QPSK, NR Channel 537000

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Polarization
5998.50	-56.58	1.50	13.10	-44.98	-25.00	H
6852.00	-59.97	1.80	12.40	-49.37	-25.00	H
8043.69	-50.66	2.00	11.30	-41.36	-25.00	H
9759.23	-57.67	2.20	11.20	-48.67	-25.00	H
12282.92	-55.93	2.60	12.60	-45.93	-25.00	H
16912.62	-54.16	2.90	16.50	-40.56	-25.00	H

**DC_26A_n41A, 1.4MHz+10MHz, DFT-OFDM, QPSK, NR Channel 500202**

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Polarization
1662.00	-52.50	0.80	8.10	-45.20	-25.00	H
5255.25	-55.61	1.80	12.50	-44.91	-25.00	H
7491.69	-54.16	1.90	12.00	-44.06	-25.00	H
11724.00	-53.79	2.60	11.00	-45.39	-25.00	H
14364.00	-53.91	2.60	11.90	-44.61	-25.00	H
16618.62	-54.04	2.60	16.50	-40.14	-25.00	H

DC_26A_n41A, 1.4MHz+10MHz, DFT-OFDM, QPSK, NR Channel 518598

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Polarization
5273.25	-55.35	1.60	12.50	-44.45	-25.00	H
5977.50	-57.10	1.50	13.10	-45.50	-25.00	H
6949.38	-58.90	1.80	12.40	-48.30	-25.00	H
7767.23	-51.25	1.80	11.30	-41.75	-25.00	H
10672.15	-56.12	2.20	10.80	-47.52	-25.00	H
12356.31	-55.31	2.60	12.60	-45.31	-25.00	H

DC_26A_n41A, 1.4MHz+10MHz, DFT-OFDM, QPSK, NR Channel 537000

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Polarization
5362.88	-55.91	1.30	12.50	-44.71	-25.00	H
8043.23	-56.80	2.00	11.30	-47.50	-25.00	H
11202.92	-55.53	2.50	10.50	-47.53	-25.00	H
12772.15	-57.17	2.60	13.80	-45.97	-25.00	H
14956.15	-52.21	2.70	11.20	-43.71	-25.00	H
16758.92	-53.90	2.90	16.50	-40.30	-25.00	H

**DC_12A_n66A, 1.4MHz+5MHz, DFT-OFDM, QPSK, NR Channel 342500**

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Polarization
5131.50	-57.58	1.30	12.50	-46.38	-13.00	H
6948.86	-68.21	1.80	12.40	-57.61	-13.00	H
9214.45	-67.54	2.10	11.60	-58.04	-13.00	H
11160.38	-64.74	2.50	10.50	-56.74	-13.00	H
13524.38	-64.27	2.50	12.40	-54.37	-13.00	H
16741.31	-63.13	2.90	16.50	-49.53	-13.00	H

DC_12A_n66A, 1.4MHz+5MHz, DFT-OFDM, QPSK, NR Channel 349500

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Polarization
5513.25	-65.16	1.40	13.10	-53.46	-13.00	H
7924.23	-67.79	1.90	11.30	-58.39	-13.00	H
9721.18	-67.49	2.20	11.20	-58.49	-13.00	H
12346.45	-65.19	2.60	12.60	-55.19	-13.00	H
14932.69	-61.55	2.70	11.20	-53.05	-13.00	H
16918.94	-63.35	2.90	16.50	-49.75	-13.00	H

DC_12A_n66A, 1.4MHz+5MHz, DFT-OFDM, QPSK, NR Channel 355500

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Polarization
5326.50	-58.19	1.30	12.50	-46.99	-13.00	H
7992.70	-67.84	1.90	11.30	-58.44	-13.00	H
10297.34	-67.23	2.10	11.30	-58.03	-13.00	H
12752.62	-66.21	2.60	13.80	-55.01	-13.00	H
15544.75	-66.00	2.40	15.60	-52.80	-13.00	H
16686.62	-63.41	2.60	16.50	-49.51	-13.00	H

Note: The maximum value of expanded measurement uncertainty for this test item is $U = 2.87\text{dB}(30\text{MHz}-3\text{GHz})/3.35\text{dB}(3\text{GHz}-18\text{GHz})/2.68\text{dB}(18\text{GHz}-40\text{GHz})$, $k = 2$



A.3 FREQUENCY STABILITY

Reference

FCC: CFR Part 2.1055, 22.355, 27.54.

A.3.1 Method of Measurement

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a "call mode". This is accomplished with the use of E7515B DIGITAL RADIO COMMUNICATION TESTER.

1. Measure the carrier frequency at room temperature.
2. Subject the EUT to overnight soak at -30°C.
3. With the EUT, powered via nominal voltage, connected to the E7515B and in a simulated call on middle channel, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
4. Repeat the above measurements at 10°C increments from -30°C to +50°C. Allow at least 1.5 hours at each temperature, unpowered, before making measurements.
5. Remeasure carrier frequency at room temperature with nominal voltage. Vary supply voltage from minimum voltage to maximum voltage, in 0.1Volt increments remeasuring carrier frequency at each voltage. Pause at nominal voltage for 1.5 hours unpowered, to allow any self-heating to stabilize, before continuing.
6. Subject the EUT to overnight soak at +50°C.
7. With the EUT, powered via nominal voltage, connected to the E7515B and in a simulated call on the centre channel, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
8. Repeat the above measurements at 10 °C increments from +50°C to -30°C. Allow at least 1.5 hours at each temperature, unpowered, before making measurements.
9. At all temperature levels hold the temperature to +/- 0.5°C during the measurement procedure.

A.3.2 Measurement Limit

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. As this transceiver is considered "Hand carried, battery powered equipment" Section 2.1055(d) (2) applies. This requires that the lower voltage for frequency stability testing be specified by the manufacturer. This transceiver is specified to operate with an input voltage of between 3.6V and 4.45V, with a nominal voltage of 3.87V. Operation above or below these voltage limits is prohibited by transceiver software in order to prevent improper operation as well as to protect components from overstress. These voltages represent a tolerance from -7% to 15%. For the purposes of measuring frequency stability these voltage limits are to be used.

A.3.3 Measurement results

n2, 20MHz bandwidth (worst case of all bandwidths)

Frequency Error vs Temperature

Temperature(°C)	Voltage(V)	FL(MHz)	FH(MHz)	Offset(Hz)	Frequency error(ppm)
20	3.87	1850.048	1909.984		
50				6.30	0.0034
40				3.20	0.0017
30				-1.80	0.0010
10				-1.30	0.0007
0				15.60	0.0083
-10				16.30	0.0087
-20				-2.30	0.0012
-30				20.30	0.0108

Frequency Error vs Voltage

Voltage(V)	Temperature(°C)	FL(MHz)	FH(MHz)	Offset(Hz)	Frequency error(ppm)
3.45	20	1850.048	1909.984	2.00	0.0011
4.45				22.10	0.0118

n5, 5MHz bandwidth (worst case of all bandwidths)

Frequency Error vs Temperature

Temperature(°C)	Voltage(V)	FL(MHz)	FH(MHz)	Offset(Hz)	Frequency error(ppm)
20	3.87	824.000	847.640		
50				-2.40	0.0029
40				2.20	0.0026
30				-1.50	0.0018
10				1.90	0.0023
0				1.40	0.0017
-10				0.60	0.0007
-20				-1.00	0.0012
-30				0.00	0.0000

Frequency Error vs Voltage

Voltage(V)	Temperature(°C)	FL(MHz)	FH(MHz)	Offset(Hz)	Frequency error(ppm)
3.45	20	824.000	847.640	-0.30	0.0004
4.45				0.40	0.0005

Expanded measurement uncertainty is 10Hz, $k = 2$


n7, 20MHz bandwidth (worst case of all bandwidths)
Frequency Error vs Temperature

Temperature(°C)	Voltage(V)	FL(MHz)	FH(MHz)	Offset(Hz)	Frequency error(ppm)
20	3.87	2500.464	2569.616		
50				3.50	0.0014
40				-3.50	0.0014
30				0.00	0.0000
10				-2.80	0.0011
0				-5.50	0.0022
-10				-0.90	0.0004
-20				2.00	0.0008
-30				-0.50	0.0002

Frequency Error vs Voltage

Voltage(V)	Temperature(°C)	FL(MHz)	FH(MHz)	Offset(Hz)	Frequency error(ppm)
3.45	20	2500.464	2569.616	1.30	0.0005
4.45				-3.80	0.0015

Expanded measurement uncertainty is 10Hz, $k = 2$
n38, 20MHz bandwidth (worst case of all bandwidths)
Frequency Error vs Temperature

Temperature(°C)	Voltage(V)	FL(MHz)	FH(MHz)	Offset(Hz)	Frequency error(ppm)
20	3.87	2570.768	2619.250		
50				-3.90	0.0015
40				22.00	0.0085
30				0.80	0.0003
10				-4.70	0.0018
0				-2.70	0.0010
-10				-0.90	0.0003
-20				-0.20	0.0001
-30				-1.10	0.0004

Frequency Error vs Voltage

Voltage(V)	Temperature(°C)	FL(MHz)	FH(MHz)	Offset(Hz)	Frequency error(ppm)
3.45	20	2570.768	2619.250	-9.30	0.0036
4.45				4.00	0.0015

Expanded measurement uncertainty is 10Hz, $k = 2$

**n41, 20MHz bandwidth (worst case of all bandwidths)****Frequency Error vs Temperature**

Temperature(°C)	Voltage(V)	FL(MHz)	FH(MHz)	Offset(Hz)	Frequency error(ppm)
20	3.87	2496.736	2688.128		
50				3.10	0.0012
40				5.60	0.0022
30				7.00	0.0027
10				4.50	0.0017
0				-1.20	0.0005
-10				3.40	0.0013
-20				6.30	0.0024
-30				3.30	0.0013

Frequency Error vs Voltage

Voltage(V)	Temperature(°C)	FL(MHz)	FH(MHz)	Offset(Hz)	Frequency error(ppm)
3.45	20	2496.736	2688.128	3.30	0.0013
4.45				6.60	0.0025

Expanded measurement uncertainty is 10Hz, $k = 2$ **n66, 20MHz bandwidth (worst case of all bandwidths)****Frequency Error vs Temperature**

Temperature(°C)	Voltage(V)	FL(MHz)	FH(MHz)	Offset(Hz)	Frequency error(ppm)
20	3.87	1710.016	1779.504		
50				-1.30	0.0007
40				2.10	0.0012
30				-2.20	0.0013
10				4.20	0.0024
0				4.50	0.0026
-10				10.30	0.0059
-20				0.70	0.0004
-30				0.40	0.0002

Frequency Error vs Voltage

Voltage(V)	Temperature(°C)	FL(MHz)	FH(MHz)	Offset(Hz)	Frequency error(ppm)
3.45	20	1710.016	1779.504	2.90	0.0017
4.45				3.00	0.0017

Expanded measurement uncertainty is 10Hz, $k = 2$



A.4 OCCUPIED BANDWIDTH

Occupied bandwidth measurements are only provided for selected frequencies in order to reduce the amount of submitted data. Data were taken at the extreme and mid frequency. The table below lists the measured 99% BW. Spectrum analyzer plots are included on the following pages.

The measurement method is from ANSI C63.26:

- a) The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be set wide enough to capture all modulation products including the emission skirts.
- b) The nominal IF filter 3 dB bandwidth (RBW) shall be in the range of 1% to 5% of the anticipated OBW, and the VBW shall be set $\geq 3 \times \text{RBW}$.
- c) Set the reference level of the instrument as required to prevent the signal amplitude from exceeding the maximum spectrum analyzer input mixer level for linear operation.
- d) Set the detection mode to peak, and the trace mode to max-hold.