

TEST REPORT

Applicant: Shenzhen AIX Video Technology Co., Ltd.

Address of Applicant: 603,Building C,NO.142,Xiangshan Avenue, Bao'an District, Shenzhen

Manufacturer: Shenzhen AIX Video Technology Co., Ltd.

Address of Manufacturer: 603,Building C,NO.142,Xiangshan Avenue, Bao'an District, Shenzhen

Factory: Shenzhen AIX Video Technology Co., Ltd.

Address of Factory: 1304,Building B,No.2,Kefeng Road,Nanshan District, Shenzhen

Equipment Under Test (EUT)

Product Name: HD Intelligent Network Set Top Box

Model No.: Hi96,H1,H2,H3,H4,H5,H6,H7,H8,H9,H10,H16,H18,H20,V1,V2,V3,V4,V5,V6,V7,V8,V9,V10,V16,V18,V20

Trade Mark: N/A

FCC ID: 2A272-HI96

Applicable standards: FCC CFR Title 47 Part 15 Subpart E Section 15.407

Date of sample receipt: Sep.07, 2021

Date of Test: Sep.12, 2021-Oct.28, 2021

Date of report issued: Oct.29, 2021

Test Result : PASS *

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:




Robinson Luo
Laboratory Manager

This results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

2 Version

Version No.	Date	Description
00	Oct.29, 2021	Original


Prepared By:


Project Engineer

Date:

Oct.28, 2021

Check By:


Reviewer

Date:

Oct.29, 2021

3 Contents

	Page
1 COVER PAGE	1
2 VERSION	2
3 CONTENTS	3
4 TEST SUMMARY	4
4.1 MEASUREMENT UNCERTAINTY	4
5 GENERAL INFORMATION	5
5.1 GENERAL DESCRIPTION OF EUT	5
5.2 TEST MODE	7
5.3 DESCRIPTION OF SUPPORT UNITS	7
5.4 DEVIATION FROM STANDARDS	7
5.5 ABNORMALITIES FROM STANDARD CONDITIONS	7
5.6 TEST FACILITY	7
5.7 TEST LOCATION	7
5.8 ADDITIONAL INSTRUCTIONS	8
6 TEST INSTRUMENTS LIST	9
7 TEST RESULTS AND MEASUREMENT DATA	11
7.1 ANTENNA REQUIREMENT	11
7.2 CONDUCTED EMISSIONS	12
7.3 DUTY CYCLE	15
7.4 CONDUCTED PEAK OUTPUT POWER	16
7.5 CHANNEL BANDWIDTH	18
7.6 POWER SPECTRAL DENSITY	24
7.7 BAND EDGE	32
7.7.1 Radiated Emission Method	32
7.8 SPURIOUS EMISSION	39
7.8.1 Radiated Emission Method	39
7.9 FREQUENCY STABILITY	48
8 TEST SETUP PHOTO	50
9 EUT CONSTRUCTIONAL DETAILS	50

4 Test Summary

Test Item	Section in CFR 47	Result
Antenna requirement	15.203	Pass
AC Power Line Conducted Emission	15.207	Pass
Conducted Peak Output Power	15.407(a)(3)	Pass
Channel Bandwidth	15.407(e)	Pass
Power Spectral Density	15.407(a)(3)	Pass
Band Edge	15.407(b)(4)	Pass
Spurious Emission	15.205/15.209/15.407(b)(4)	Pass
Frequency Stability	15.407(g)	Pass

Remarks:

1. Pass: The EUT complies with the essential requirements in the standard.
2. Test according to ANSI C63.10:2013.

4.1 Measurement Uncertainty

Test Item	Frequency Range	Measurement Uncertainty	Notes
Radiated Emission	9kHz-30MHz	3.1dB	(1)
Radiated Emission	30MHz-200MHz	3.8039dB	(1)
Radiated Emission	200MHz-1GHz	3.9679dB	(1)
Radiated Emission	1GHz-18GHz	4.29dB	(1)
Radiated Emission	18GHz-40GHz	3.30dB	(1)
AC Power Line Conducted Emission	0.15MHz ~ 30MHz	3.44dB	(1)

Note (1): The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.

5 General Information

5.1 General Description of EUT

Product Name:	HD Intelligent Network Set Top Box
Model No.:	Hi96,H1,H2,H3,H4,H5,H6,H7,H8,H9,H10,H16,H18,H20,V1,V2,V3,V4,V5,V6,V7,V8,V9,V10,V16,V18,V20
Test Model No:	Hi96
Remark: All models differences are the product name and appearance colour, others are same	
Serial No.:	N/A
Hardware Version:	HHV--TV--V3.1
Software Version:	HHS-TUYA-V1.0.0.5
Test sample(s) ID:	GTSL202111000005-1
Sample(s) Status:	Engineer sample
Operation Frequency:	802.11a/802.11n(HT20)/802.11ac(HT20): 5745MHz ~ 5825MHz 802.11n(HT40)/ 802.11ac(HT40): 5755MHz ~ 5795MHz 802.11ac(HT80): 5775MHz
Channel numbers:	802.11a/802.11n(HT20)/802.11ac(HT20): 5 802.11n(HT40)/ 802.11ac(HT40): 2 802.11ac(HT80): 1
Channel bandwidth:	802.11a/802.11n(HT20)/802.11ac(HT20) : 20MHz 802.11n(HT40)/802.11ac(HT40) : 40MHz 802.11ac(HT80): 80MHz
Modulation technology:	Orthogonal Frequency Division Multiplexing (OFDM)
Antenna Type:	PCB antenna
Antenna gain:	3dBi(Declare by applicant)
Power supply:	DC5V From adapter with 100-240VAC 50/60Hz

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
149	5745MHz	151	5755MHz	153	5765MHz	155	5775MHz
157	5785MHz	159	5795MHz	161	5805MHz	163	5815MHz
165	5825MHz						

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Test channel	Frequency (MHz)		
	802.11 a/n/ac(HT20)	802.11 n/ac(HT40)	802.11ac(HT80)
Lowest channel	5745	5755	
Middle channel	5785		5775
Highest channel	5825	5795	

5.2 Test mode

Transmitting mode	Keep the EUT in continuously transmitting mode EUT was test with 100% duty cycle at its maximum power control level.
<i>Remark: During the test, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.</i>	

We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:

Per-scan all kind of data rate in lowest channel, and found the follow list which it was worst case.

Mode	Data rate
802.11a	6Mbps
802.11n/ac(HT20)	6.5Mbps
802.11n/ac(HT40)	13Mbps
802.11ac(HT80)	29.3Mbps

5.3 Description of Support Units

None.

5.4 Deviation from Standards

None.

5.5 Abnormalities from Standard Conditions

None.

5.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **FCC—Registration No.: 381383**

Designation Number: CN5029

Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully

described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files.

- **IC —Registration No.: 9079A**

CAB identifier: CN0091

The 3m Semi-

anechoic chamber of Global United Technology Services Co., Ltd. has been registered by Certification

and Engineering Bureau of Industry Canada for radio equipment testing

- **NVLAP (LAB CODE:600179-0)**

Global United Technology Services Co., Ltd., is accredited by the National Voluntary Laboratory Accreditation Program (NVLAP).

5.7 Test Location

All tests were performed at:

Global United Technology Services Co., Ltd.
No. 301-309, 3/F., Jinyuan Business Building, No.2, Laodong Industrial Zone,
Xixiang Road, Baoan District, Shenzhen, Guangdong, China
Tel: 0755-27798480
Fax: 0755-27798960

5.8 Additional Instructions

Test Software	Special test command provided by manufacturer
Power level setup	Default
Version	Ver 1.0

6 Test Instruments list

Radiated Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	3m Semi- Anechoic Chamber	ZhongYu Electron	9.2(L)*6.2(W)* 6.4(H)	GTS250	July. 02 2020	July. 01 2025
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A	N/A
3	EMI Test Receiver	Rohde & Schwarz	ESU26	GTS203	June. 24 2021	June. 23 2022
4	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	GTS214	June. 24 2021	June. 23 2022
5	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	BBHA 9120 D	GTS208	June. 24 2021	June. 23 2022
6	Horn Antenna	ETS-LINDGREN	3160	GTS217	June. 24 2021	June. 23 2022
7	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
8	Coaxial Cable	GTS	N/A	GTS213	June. 24 2021	June. 23 2022
9	Coaxial Cable	GTS	N/A	GTS211	June. 24 2021	June. 23 2022
10	Coaxial cable	GTS	N/A	GTS210	June. 24 2021	June. 23 2022
11	Coaxial Cable	GTS	N/A	GTS212	June. 24 2021	June. 23 2022
12	Amplifier(100kHz-3GHz)	HP	8347A	GTS204	June. 24 2021	June. 23 2022
13	Amplifier(2GHz-20GHz)	HP	84722A	GTS206	June. 24 2021	June. 23 2022
14	Amplifier (18-26GHz)	Rohde & Schwarz	AFS33-18002 650-30-8P-44	GTS218	June. 24 2021	June. 23 2022
15	Band filter	Amindeon	82346	GTS219	June. 24 2021	June. 23 2022
16	Power Meter	Anritsu	ML2495A	GTS540	June. 24 2021	June. 23 2022
17	Power Sensor	Anritsu	MA2411B	GTS541	June. 24 2021	June. 23 2022
18	Wideband Radio Communication Tester	Rohde & Schwarz	CMW500	GTS575	June. 24 2021	June. 23 2022
19	Splitter	Agilent	11636B	GTS237	June. 24 2021	June. 23 2022
20	Loop Antenna	ZHINAN	ZN30900A	GTS534	June. 24 2021	June. 23 2022
21	Breitband hornantenne	SCHWARZBECK	BBHA 9170	GTS579	Oct. 17 2021	Oct. 16 2022
22	Amplifier	TDK	PA-02-02	GTS574	Oct. 17 2021	Oct. 16 2022
23	Amplifier	TDK	PA-02-03	GTS576	Oct. 17 2021	Oct. 16 2022
24	PSA Series Spectrum Analyzer	Rohde & Schwarz	FSP	GTS578	June. 24 2021	June. 23 2022

Conducted Emission						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Shielding Room	ZhongYu Electron	7.3(L)x3.1(W)x2.9(H)	GTS252	May.15 2019	May.14 2022
2	EMI Test Receiver	R&S	ESCI 7	GTS552	June. 24 2021	June. 23 2022
3	Coaxial Switch	ANRITSU CORP	MP59B	GTS225	June. 24 2021	June. 23 2022
4	ENV216 2-L-V-NETZNACHB.DE	ROHDE&SCHWARZ	ENV216	GTS226	June. 24 2021	June. 23 2022
5	Coaxial Cable	GTS	N/A	GTS227	N/A	N/A
6	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
7	Thermo meter	KTJ	TA328	GTS233	June. 24 2021	June. 23 2022
8	Absorbing clamp	Elektronik-Feinmechanik	MDS21	GTS229	June. 24 2021	June. 23 2022
9	ISN	SCHWARZBECK	NTFM 8158	GTS565	June. 24 2021	June. 23 2022
10	High voltage probe	SCHWARZBECK	TK9420	GTS537	July. 09 2021	July. 08 2022

RF Conducted Test:						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	MXA Signal Analyzer	Agilent	N9020A	GTS566	June. 24 2021	June. 23 2022
2	EMI Test Receiver	R&S	ESCI 7	GTS552	June. 24 2021	June. 23 2022
3	Spectrum Analyzer	Agilent	E4440A	GTS533	June. 24 2021	June. 23 2022
4	MXG vector Signal Generator	Agilent	N5182A	GTS567	June. 24 2021	June. 23 2022
5	ESG Analog Signal Generator	Agilent	E4428C	GTS568	June. 24 2021	June. 23 2022
6	USB RF Power Sensor	DARE	RPR3006W	GTS569	June. 24 2021	June. 23 2022
7	RF Switch Box	Shongyi	RFSW3003328	GTS571	June. 24 2021	June. 23 2022
8	Programmable Constant Temp & Humi Test Chamber	WEWON	WHTH-150L-40-880	GTS572	June. 24 2021	June. 23 2022


General used equipment:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Humidity/ Temperature Indicator	KTJ	TA328	GTS243	June. 24 2021	June. 23 2022
2	Barometer	ChangChun	DYM3	GTS255	June. 24 2021	June. 23 2022

7 Test results and Measurement Data

7.1 Antenna requirement


Standard requirement:	FCC Part15 C Section 15.203
<i>15.203 requirement:</i> <i>An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</i>	
E.U.T Antenna:	
<i>The antenna is Integrated antenna, the best case gain of the antenna is 3dBi, Two antennas simultaneously transmitting, the Directional Gain is 6dBi, reference to the appendix II for details</i>	

7.2 Conducted Emissions

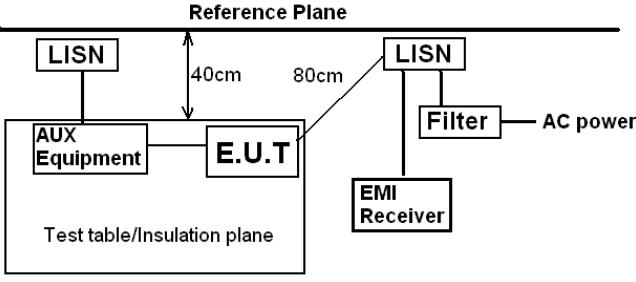Test Requirement:	FCC Part15 C Section 15.207						
Test Method:	ANSI C63.10:2013						
Test Frequency Range:	150KHz to 30MHz						
Class / Severity:	Class B						
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto						
Limit:	Frequency range (MHz)		Limit (dBuV)				
			Quasi-peak		Average		
	0.15-0.5		66 to 56*		56 to 46*		
	0.5-5		56		46		
	5-30		60		50		
* Decreases with the logarithm of the frequency.							
Test setup:	Reference Plane  Remark: E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m						
Test procedure:	1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2013 on conducted measurement.						
Test Instruments:	Refer to section 6.0 for details						
Test mode:	Refer to section 5.2 for details						
Test environment:	Temp.:	23.6 °C	Humid.:	57%	Press.:	1012mbar	
Test voltage:	AC 120V, 60Hz						
Test results:	Pass						


Measurement data

Line:

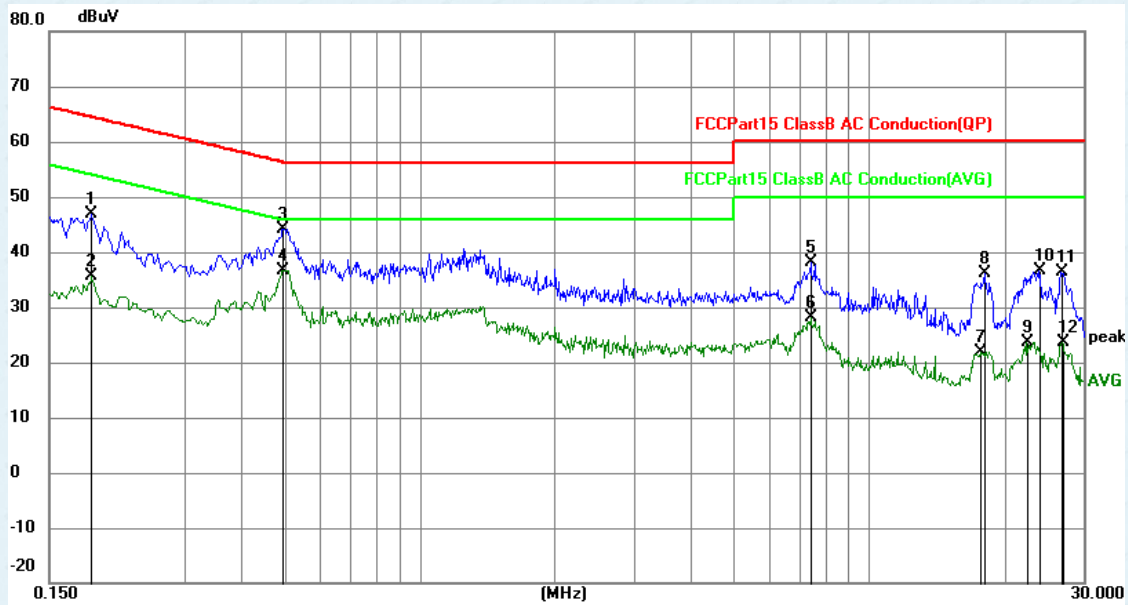

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1862	34.44	12.47	46.91	64.20	-17.29	QP
2	0.1862	23.18	12.47	35.65	54.20	-18.55	AVG
3	0.4964	31.87	12.36	44.23	56.06	-11.83	QP
4	0.4964	24.38	12.36	36.74	46.06	-9.32	AVG
5	7.4355	25.80	12.37	38.17	60.00	-21.83	QP
6	7.4355	15.70	12.37	28.07	50.00	-21.93	AVG
7	17.7179	9.42	12.49	21.91	50.00	-28.09	AVG
8	18.0731	23.61	12.51	36.12	60.00	-23.88	QP
9	22.4832	11.01	12.59	23.60	50.00	-26.40	AVG
10	23.9054	24.01	12.61	36.62	60.00	-23.38	QP
11	26.7630	23.63	12.66	36.29	60.00	-23.71	QP
12	26.8440	10.97	12.66	23.63	50.00	-26.37	AVG

Neutral:

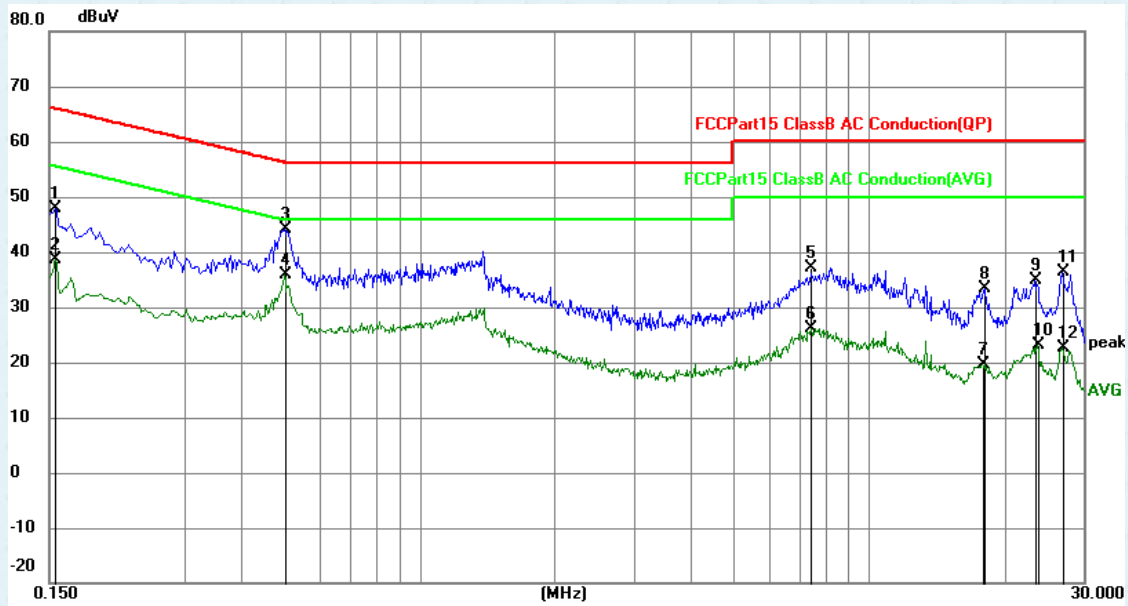


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1547	35.39	12.49	47.88	65.74	-17.86	QP
2	0.1547	26.15	12.49	38.64	55.74	-17.10	AVG
3	0.5010	31.88	12.36	44.24	56.00	-11.76	QP
4	0.5010	23.41	12.36	35.77	46.00	-10.23	AVG
5	7.4355	24.74	12.37	37.11	60.00	-22.89	QP
6	7.4355	13.83	12.37	26.20	50.00	-23.80	AVG
7	17.9340	7.06	12.51	19.57	50.00	-30.43	AVG
8	18.0600	20.86	12.51	33.37	60.00	-26.63	QP
9	23.4465	22.28	12.60	34.88	60.00	-25.12	QP
10	23.6580	10.51	12.61	23.12	50.00	-26.88	AVG
11	26.9205	23.78	12.66	36.44	60.00	-23.56	QP
12	26.9205	9.90	12.66	22.56	50.00	-27.44	AVG

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Receiver Read level + LISN Factor + Cable Loss
4. If the average limit is met when using a quasi-peak detector receiver, the EUT shall be deemed to meet both *limits and measurement with the average detector receiver is unnecessary.*

7.3 Duty Cycle

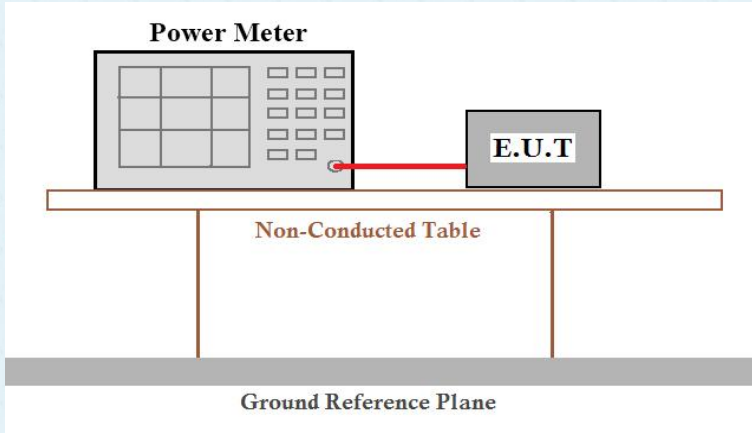Test Requirement:	FCC Part15 E Section 15.407
Test Method:	ANSI C63.10:2013 and KDB 789033 D02 General U-NII Test Procedures New Rules v02r01
Limit:	/
Test setup:	
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass


ANT 1:

Modulation	Duty cycle	Duty Factor
802.11a	100%	0
802.11n(HT20)	100%	0
802.11n(HT40)	100%	0
802.11ac(HT20)	100%	0
802.11ac(HT40)	100%	0
802.11ac(HT80)	100%	0

ANT 2:

Modulation	Duty cycle	Duty Factor
802.11a	100%	0
802.11n(HT20)	100%	0
802.11n(HT40)	100%	0
802.11ac(HT20)	100%	0
802.11ac(HT40)	100%	0
802.11ac(HT80)	100%	0

7.4 Conducted Peak Output Power

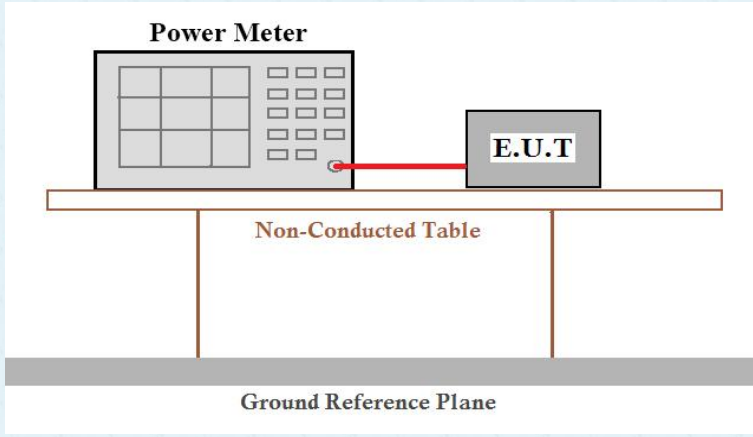Test Requirement:	FCC Part15 E Section 15.407(a)(3)
Test Method:	ANSI C63.10:2013 and KDB 789033 D02 General U-NII Test Procedures New Rules v02r01
Limit:	30dBm
Test setup:	
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Measurement Data

ANT 1:

Test CH	Peak Output Power (dBm)						Limit(dBm)	Result
	802.11a	802.11n (HT20)	802.11ac (HT20)	802.11n (HT40)	802.11ac (HT40)	802.11ac (HT80)		
Lowest	11.76	11.55	11.49	7.31	7.18	---	30.00	Pass
Middle	12.07	11.51	11.52	---	---	6.16		
Highest	12.33	11.98	12.01	7.54	7.41	---		

ANT 2:

Test CH	Peak Output Power (dBm)						Limit(dBm)	Result
	802.11a	802.11n (HT20)	802.11ac (HT20)	802.11n (HT40)	802.11ac (HT40)	802.11ac (HT80)		
Lowest	10.92	10.62	10.59	6.32	6.28	---	30.00	Pass
Middle	10.87	10.41	10.67	---	---	5.01		
Highest	11.19	10.96	10.79	6.63	6.54	---		


Remark: “---”is not applicable

MIMO MODE:

Modulation	Test CH	Peak Output Power (dBm)		Sum Output Power (dBm)	Limit (dBm)	Result
802.11a	149	ANT 1	11.76	14.37	30.00	Pass
		ANT 2	10.92			
	157	ANT 1	12.07	14.52		
		ANT 2	10.87			
	165	ANT 1	12.33	14.81		
		ANT 2	11.19			
802.11n(HT20)	149	ANT 1	11.55	14.12	30.00	Pass
		ANT 2	10.62			
	157	ANT 1	11.51	14.01		
		ANT 2	10.41			
	165	ANT 1	11.98	14.51		
		ANT 2	10.96			
802.11ac(HT20)	149	ANT 1	11.49	14.07	30.00	Pass
		ANT 2	10.59			
	157	ANT 1	11.52	14.13		
		ANT 2	10.67			
	165	ANT 1	12.01	14.45		
		ANT 2	10.79			
802.11n(HT40)	151	ANT 1	7.31	9.85	30.00	Pass
		ANT 2	6.32			
	159	ANT 1	7.54	10.12		
		ANT 2	6.63			
802.11ac(HT40)	151	ANT 1	7.18	9.76	30.00	Pass
		ANT 2	6.28			
	159	ANT 1	7.41	10.01		
		ANT 2	6.54			
802.11ac(HT80)	155	ANT 1	6.16	8.63	30.00	Pass
		ANT 2	5.01			

Note: GANT =3 dBi, Array Gain=10log(NANT/NSS)=3.0dBi, Directional Gain=GANT + Array Gain=6 dBi,
limit=30-(6-6)=30.00dBm

7.5 Channel Bandwidth

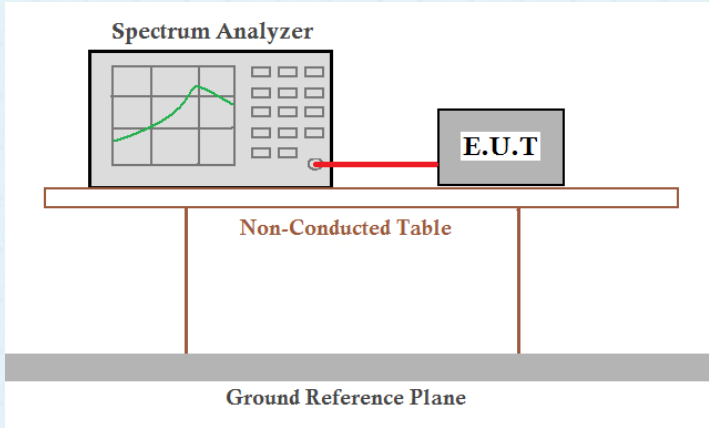Test Requirement:	FCC Part15 E Section 15.407(e)
Test Method:	ANSI C63.10:2013 and KDB 789033 D02 General U-NII Test Procedures New Rules v02r01
Limit:	>500KHz
Test setup:	
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Measurement Data

ANT1

Test CH	Channel Bandwidth (MHz)						Limit (KHz)	Result
	802.11a	802.11n (HT20)	802.11ac (HT20)	802.11n (HT40)	802.11ac (HT40)	802.11ac (HT80)		
Lowest	16.248	17.549	17.499	36.292	35.744	---	>500	Pass
Middle	15.914	17.360	17.512	---	---	75.428		
Highest	15.932	17.532	17.513	35.922	35.717	---		

ANT2

Test CH	Channel Bandwidth (MHz)						Limit (KHz)	Result
	802.11a	802.11n (HT20)	802.11ac (HT20)	802.11n (HT40)	802.11ac (HT40)	802.11ac (HT80)		
Lowest	16.258	17.666	17.499	35.708	35.750	---	>500	Pass
Middle	15.943	17.504	17.512	---	--	75.332		
Highest	15.937	17.063	17.513	35.450	35.765	---		


Remark: “---“is not applicable


Test plot as follows:








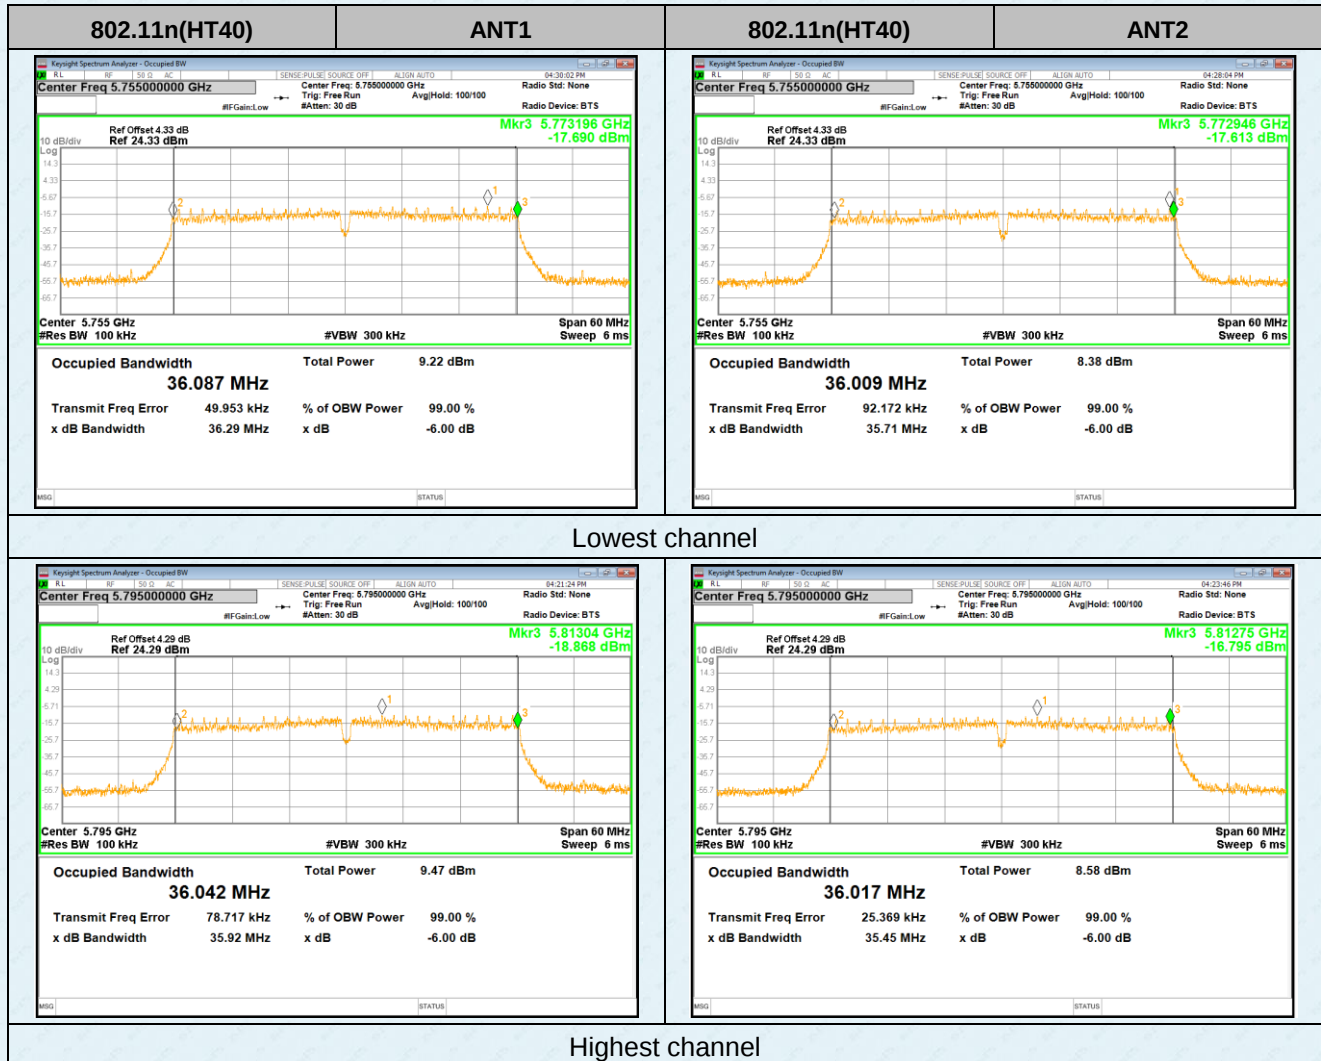


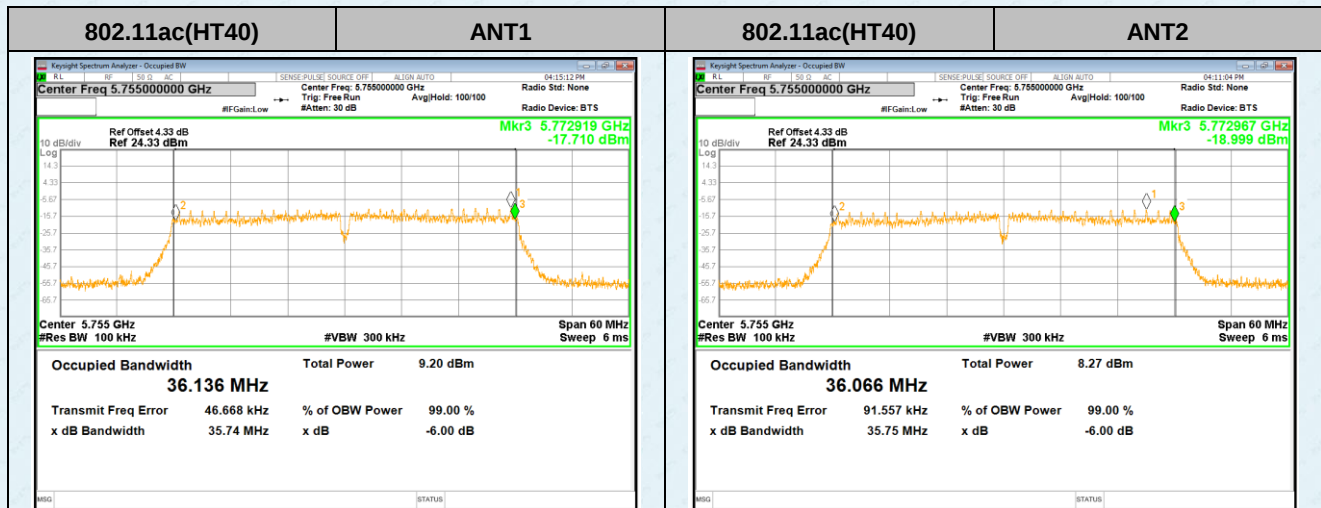

Lowest channel

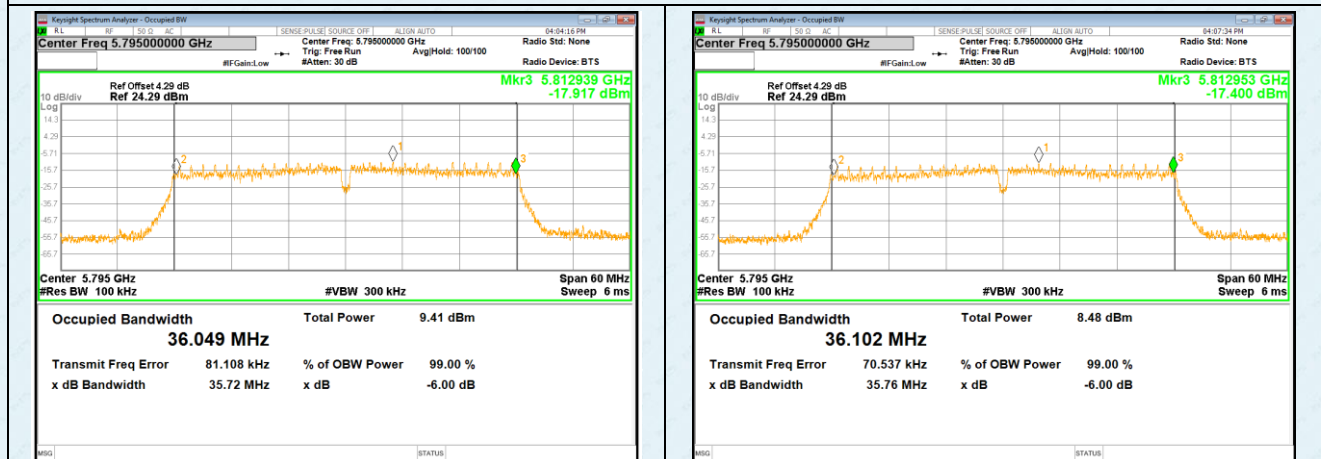


Highest channel

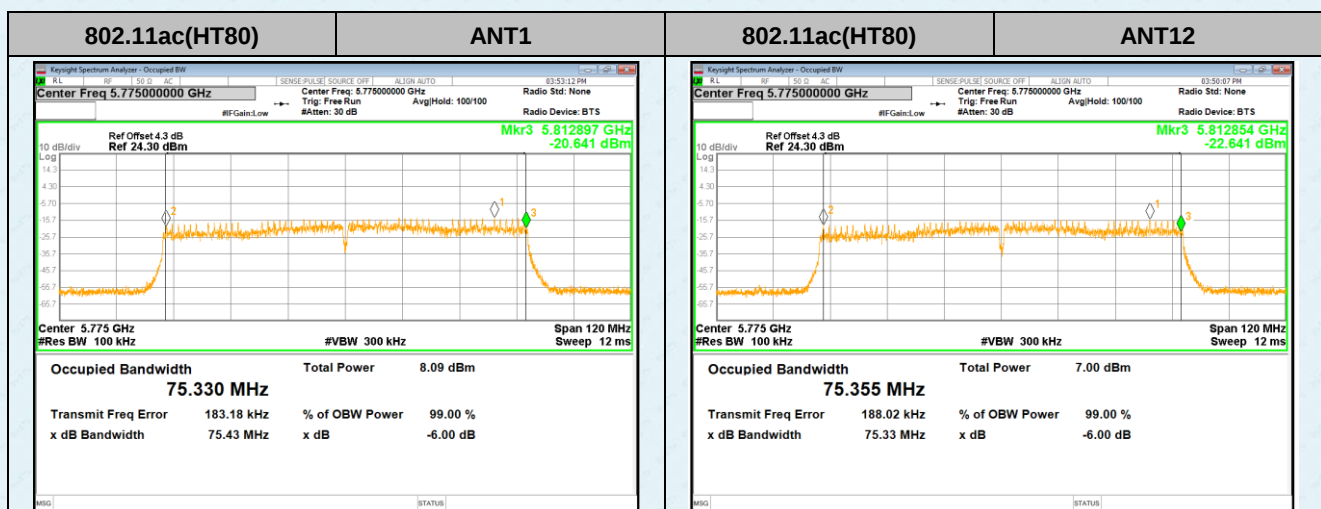

Middle channel

7.6 Power Spectral Density

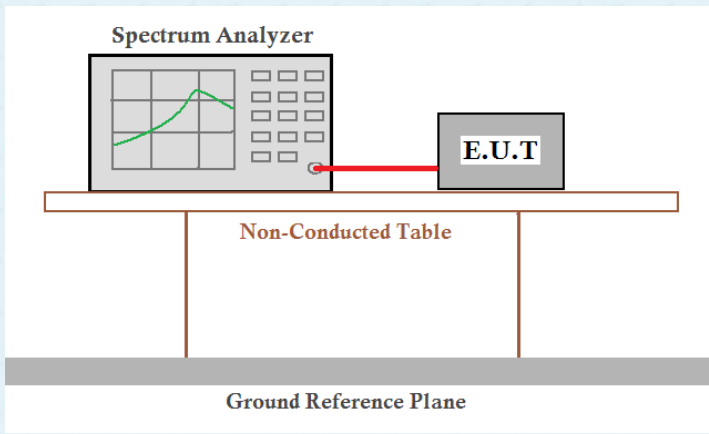Test Requirement:	FCC Part15 E Section 15.407(a)(3)
Test Method:	ANSI C63.10:2013 and KDB 789033 D02 General U-NII Test Procedures New Rules v02r01
Limit:	30dBm/500kHz
Test setup:	
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Measurement Data

Note: If the measurement is X dBm/510kHz, thus $X \text{ dBm/510kHz} = (10^{X/10}) * (500 / 510) \text{ dBm/500kHz}$

ANT 1:

Test CH	Power Spectral Density (dBm/510kHz)			Power Spectral Density (dBm/500kHz)			Limit (dBm/500kHz)	Result
	802.11a	802.11n (HT20)	802.11n (HT40)	802.11a	802.11n (HT20)	802.11n (HT40)		
Lowest	1.971	1.759	-5.736	1.885	1.673	-5.822	30.00	Pass
Middle	2.094	2.672	--	2.008	2.586	--		
Highest	2.149	1.922	-4.523	2.063	1.836	-4.609		

Test CH	Power Spectral Density (dBm/510kHz)			Power Spectral Density (dBm/500kHz)			Limit (dBm/500kHz)	Result
	802.11ac (HT20)	802.11ac (HT40)	802.11ac (HT80)	802.11ac (HT20)	802.11ac (HT40)	802.11ac (HT80)		
Lowest	1.952	-4.971	---	1.866	-5.057	---	30.00	Pass
Middle	1.943	---	-9.296	1.857	---	-9.382		
Highest	2.080	-5.095	---	1.994	-5.181	---		

Remark: "---" is not applicable

ANT 2:

Test CH	Power Spectral Density (dBm/510kHz)			Power Spectral Density (dBm/500kHz)			Limit (dBm/500kHz)	Result
	802.11a	802.11n (HT20)	802.11n (HT40)	802.11a	802.11n (HT20)	802.11n (HT40)		
Lowest	0.682	0.788	-6.364	0.596	0.702	-6.450	30.00	Pass
Middle	0.870	0.191	--	0.784	0.105	--		
Highest	1.429	0.918	-6.203	1.343	0.832	-6.289		

Test CH	Power Spectral Density (dBm/510kHz)			Power Spectral Density (dBm/500kHz)			Limit (dBm/500kHz)	Result
	802.11ac(HT20)	802.11ac(HT40)	802.11ac(HT80)	802.11ac(HT20)	802.11ac(HT40)	802.11ac(HT80)		
Lowest	0.870	-6.179	---	0.784	-6.265	---	30.00	Pass
Middle	0.602	---	-10.230	0.516	---	-10.316		
Highest	1.391	-4.883	---	1.305	-4.969	---		

Remark: "---"is not applicable

MIMO MODE

Modulation	Test CH	Power Spectral Density (dBm/500kHz)		Sum Output Power(dBm)	Limit (dBm/500kHz)	Result
802.11a	149	ANT 1	1.885	4.30	30.00	Pass
		ANT 2	0.596			
	157	ANT 1	2.008	4.45		
		ANT 2	0.784			
	165	ANT 1	2.063	4.73		
		ANT 2	1.343			
802.11n(HT20)	149	ANT 1	1.673	4.22	30.00	Pass
		ANT 2	0.702			
	157	ANT 1	2.586	4.53		
		ANT 2	0.105			
	165	ANT 1	1.836	4.37		
		ANT 2	0.832			
802.11ac(HT20)	149	ANT 1	1.866	4.37	30.00	Pass
		ANT 2	0.784			
	157	ANT 1	1.857	4.25		
		ANT 2	0.516			
	165	ANT 1	1.994	4.67		
		ANT 2	1.305			
802.11n(HT40)	151	ANT 1	-5.822	-3.11	30.00	Pass
		ANT 2	-6.450			
	159	ANT 1	-4.609	-2.36		
		ANT 2	-6.289			
802.11ac(HT40)	151	ANT 1	-5.057	-2.61	30.00	Pass
		ANT 2	-6.265			
	159	ANT 1	-5.181	-2.06		
		ANT 2	-4.969			
802.11ac(HT80)	155	ANT 1	-9.382	-6.81	30.00	Pass
		ANT 2	-10.316			


Note: GANT =3dBi, Array Gain=10log(NANT/NSS)=3.0dBi, Directional Gain=GANT + Array Gain=6dBi,
Limit =30-(6-6) =30dBm


Test plot as follows:








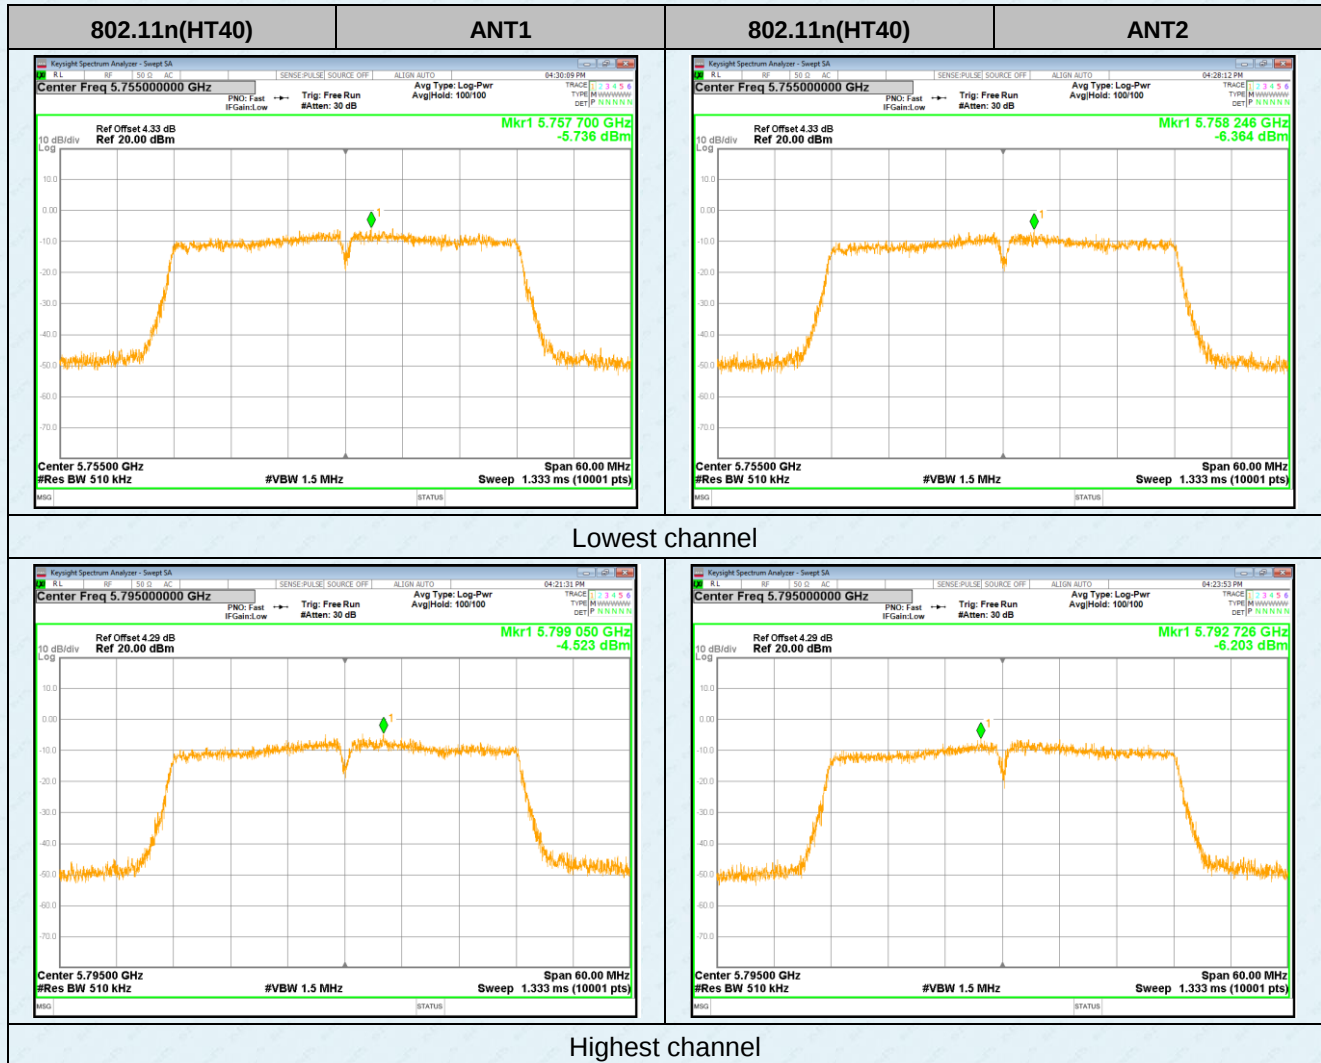


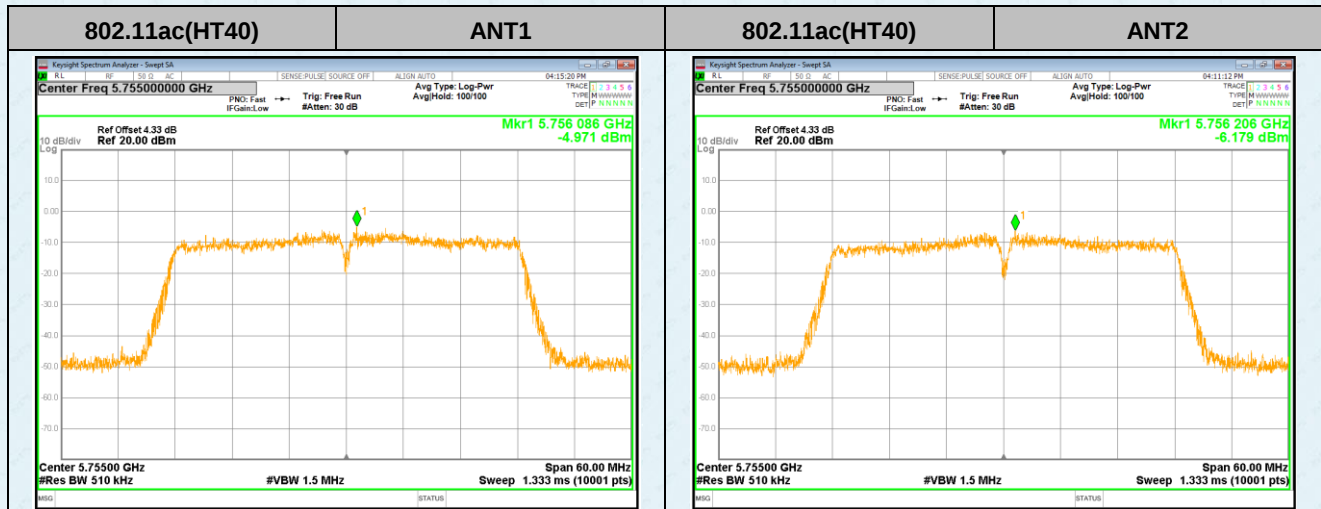

Lowest channel

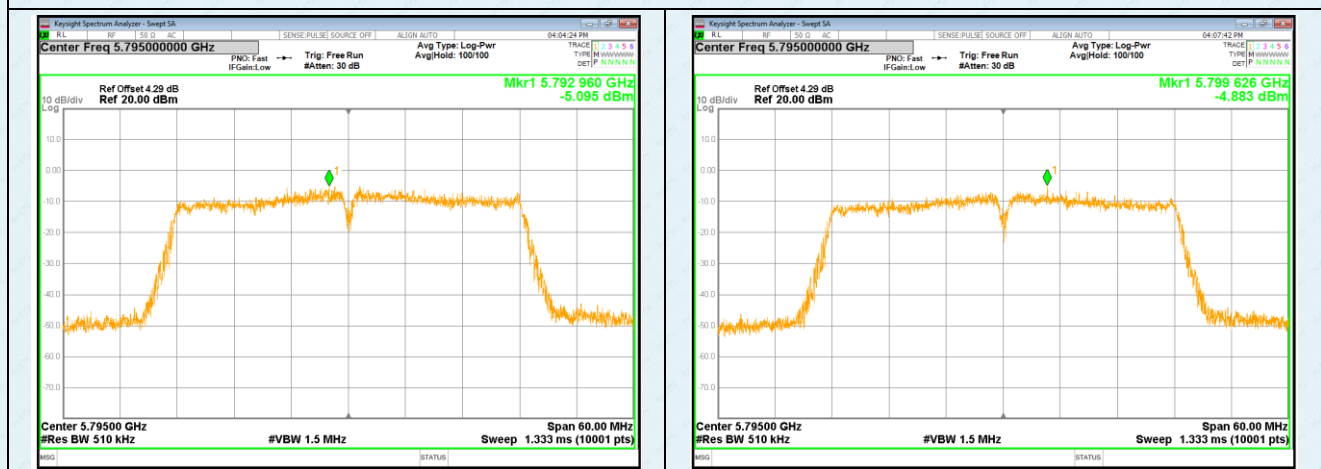


Highest channel

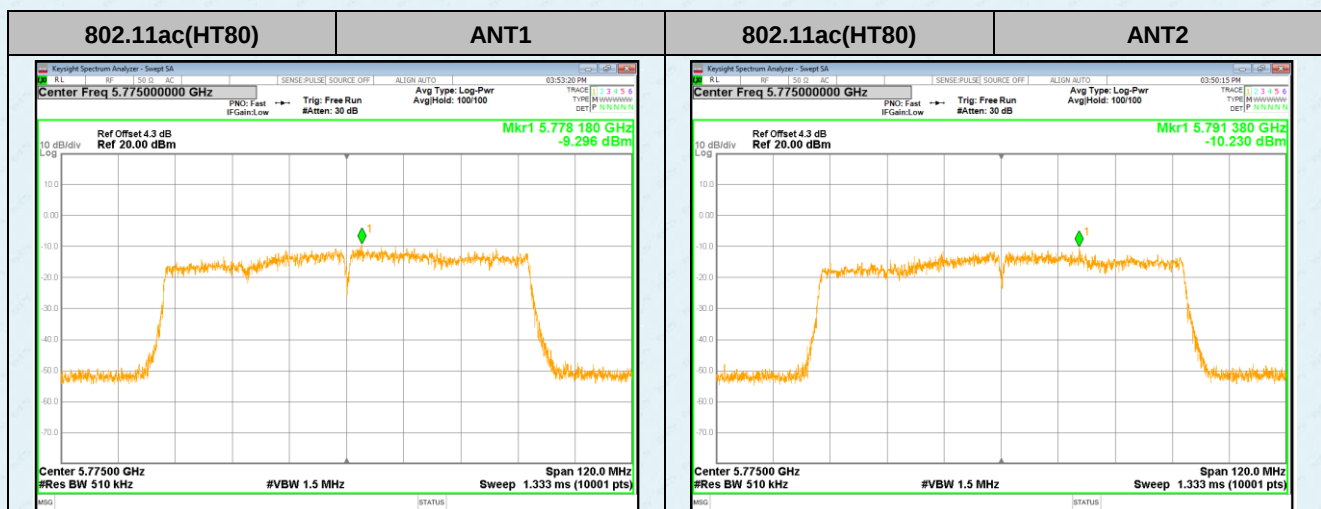

Middle channel

7.7 Band edge

7.7.1 Radiated Emission Method

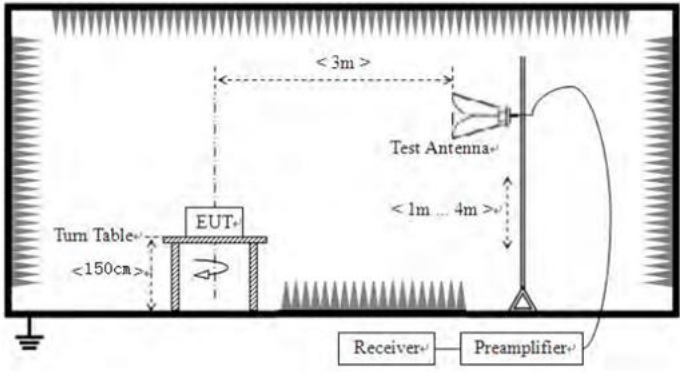Test Requirement:	FCC Part15 C Section 15.209 and 15.205				
Test Method:	ANSI C63.10: 2013				
Test Frequency Range:	9kHz to 40GHz, only worse case is reported				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	Above 1GHz	Peak	1MHz	3MHz	Peak
		RMS	1MHz	3MHz	RMS
Limit:	All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.				
Test setup:					
Test Instruments:	Refer to section 6.0 for details				
Test mode:	Refer to section 5.2 for details				
Test results:	Pass				

Remarks:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.
3. The pre-test were performed on lowest, middle and highest frequencies, only the worst case's (lowest and highest frequencies) data was showed.
4. According to KDB 789033 D02v02r01 section G) 1) d), for measurements above 1000 MHz @3m distance, the limit of field strength is computed as follows:
 $E[dBuV/m] = EIRP[dBm] + 95.2;$
 $E[dBuV/m] = -27 + 95.2 = 68.2dBuV/m.$
 $E[dBuV/m] = 10 + 95.2 = 105.2dBuV/m.$
 $E[dBuV/m] = 15.6 + 95.2 = 110.8dBuV/m.$
 $E[dBuV/m] = 27 + 95.2 = 122.2dBuV/m$

Measurement data:

IEEE 802.11a								
Peak value:								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5650.00	35.93	32.36	9.72	23.83	54.18	68.20	-14.02	Horizontal
5700.00	34.62	32.50	9.79	23.84	53.07	105.20	-52.13	Horizontal
5720.00	36.37	32.53	9.81	23.85	54.86	110.80	-55.94	Horizontal
5725.00	37.78	32.53	9.83	23.86	56.28	122.20	-65.92	Horizontal
5850.00	35.82	32.70	9.99	23.87	54.64	122.20	-67.56	Horizontal
5855.00	35.73	32.72	9.99	23.88	54.56	110.80	-56.24	Horizontal
5875.00	38.52	32.74	10.04	23.89	57.41	105.20	-47.79	Horizontal
5925.00	37.16	32.80	10.11	23.90	56.17	68.20	-12.03	Horizontal
5650.00	38.53	32.36	9.72	23.83	56.78	68.20	-11.42	Vertical
5700.00	38.91	32.50	9.79	23.84	57.36	105.20	-47.84	Vertical
5720.00	37.38	32.53	9.81	23.85	55.87	110.80	-54.93	Vertical
5725.00	36.29	32.53	9.83	23.86	54.79	122.20	-67.41	Vertical
5850.00	39.61	32.70	9.99	23.87	58.43	122.20	-63.77	Vertical
5855.00	38.15	32.72	9.99	23.88	56.98	110.80	-53.82	Vertical
5875.00	36.27	32.74	10.04	23.89	55.16	105.20	-50.04	Vertical
5925.00	35.46	32.80	10.11	23.90	54.47	68.20	-13.73	Vertical

IEEE 802.11n HT20								
Peak value:								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5650.00	37.93	32.36	9.72	23.83	56.18	68.20	-12.02	Horizontal
5700.00	36.16	32.50	9.79	23.84	54.61	105.20	-50.59	Horizontal
5720.00	39.34	32.53	9.81	23.85	57.83	110.80	-52.97	Horizontal
5725.00	41.82	32.53	9.83	23.86	60.32	122.20	-61.88	Horizontal
5850.00	38.51	32.70	9.99	23.87	57.33	122.20	-64.87	Horizontal
5855.00	39.93	32.72	9.99	23.88	58.76	110.80	-52.04	Horizontal
5875.00	41.72	32.74	10.04	23.89	60.61	105.20	-44.59	Horizontal
5925.00	40.45	32.80	10.11	23.90	59.46	68.20	-8.74	Horizontal
5650.00	38.71	32.36	9.72	23.83	56.96	68.20	-11.24	Vertical
5700.00	41.94	32.50	9.79	23.84	60.39	105.20	-44.81	Vertical
5720.00	37.62	32.53	9.81	23.85	56.11	110.80	-54.69	Vertical
5725.00	37.79	32.53	9.83	23.86	56.29	122.20	-65.91	Vertical
5850.00	40.24	32.70	9.99	23.87	59.06	122.20	-63.14	Vertical
5855.00	39.76	32.72	9.99	23.88	58.59	110.80	-52.21	Vertical
5875.00	41.69	32.74	10.04	23.89	60.58	105.20	-44.62	Vertical
5925.00	37.94	32.80	10.11	23.90	56.95	68.20	-11.25	Vertical

IEEE 802.11ac HT20								
Peak value:								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5650.00	38.26	32.36	9.72	23.83	56.51	68.20	-11.69	Horizontal
5700.00	39.12	32.50	9.79	23.84	57.57	105.20	-47.63	Horizontal
5720.00	39.24	32.53	9.81	23.85	57.73	110.80	-53.07	Horizontal
5725.00	41.83	32.53	9.83	23.86	60.33	122.20	-61.87	Horizontal
5850.00	40.21	32.70	9.99	23.87	59.03	122.20	-63.17	Horizontal
5855.00	39.34	32.72	9.99	23.88	58.17	110.80	-52.63	Horizontal
5875.00	39.94	32.74	10.04	23.89	58.83	105.20	-46.37	Horizontal
5925.00	41.38	32.80	10.11	23.90	60.39	68.20	-7.81	Horizontal
5650.00	38.35	32.36	9.72	23.83	56.60	68.20	-11.60	Vertical
5700.00	41.26	32.50	9.79	23.84	59.71	105.20	-45.49	Vertical
5720.00	40.78	32.53	9.81	23.85	59.27	110.80	-51.53	Vertical
5725.00	38.81	32.53	9.83	23.86	57.31	122.20	-64.89	Vertical
5850.00	37.52	32.70	9.99	23.87	56.34	122.20	-65.86	Vertical
5855.00	37.76	32.72	9.99	23.88	56.59	110.80	-54.21	Vertical
5875.00	38.47	32.74	10.04	23.89	57.36	105.20	-47.84	Vertical
5925.00	38.15	32.80	10.11	23.90	57.16	68.20	-11.04	Vertical

IEEE 802.11n HT40								
Peak value:								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5650.00	35.57	32.36	9.72	23.83	53.82	68.20	-14.38	Horizontal
5700.00	36.62	32.50	9.79	23.84	55.07	105.20	-50.13	Horizontal
5720.00	38.36	32.53	9.81	23.85	56.85	110.80	-53.95	Horizontal
5725.00	37.41	32.53	9.83	23.86	55.91	122.20	-66.29	Horizontal
5850.00	36.43	32.70	9.99	23.87	55.25	122.20	-66.95	Horizontal
5855.00	37.16	32.72	9.99	23.88	55.99	110.80	-54.81	Horizontal
5875.00	36.92	32.74	10.04	23.89	55.81	105.20	-49.39	Horizontal
5925.00	36.83	32.80	10.11	23.90	55.84	68.20	-12.36	Horizontal
5650.00	37.15	32.36	9.72	23.83	55.40	68.20	-12.80	Vertical
5700.00	35.47	32.50	9.79	23.84	53.92	105.20	-51.28	Vertical
5720.00	35.61	32.53	9.81	23.85	54.10	110.80	-56.70	Vertical
5725.00	36.42	32.53	9.83	23.86	54.92	122.20	-67.28	Vertical
5850.00	38.14	32.70	9.99	23.87	56.96	122.20	-65.24	Vertical
5855.00	36.06	32.72	9.99	23.88	54.89	110.80	-55.91	Vertical
5875.00	36.72	32.74	10.04	23.89	55.61	105.20	-49.59	Vertical
5925.00	36.83	32.80	10.11	23.90	55.84	68.20	-12.36	Vertical

IEEE 802.11ac HT40								
Peak value:								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5650.00	36.72	32.36	9.72	23.83	54.97	68.20	-13.23	Horizontal
5700.00	37.16	32.50	9.79	23.84	55.61	105.20	-49.59	Horizontal
5720.00	36.44	32.53	9.81	23.85	54.93	110.80	-55.87	Horizontal
5725.00	36.59	32.53	9.83	23.86	55.09	122.20	-67.11	Horizontal
5850.00	37.84	32.70	9.99	23.87	56.66	122.20	-65.54	Horizontal
5855.00	37.61	32.72	9.99	23.88	56.44	110.80	-54.36	Horizontal
5875.00	36.18	32.74	10.04	23.89	55.07	105.20	-50.13	Horizontal
5925.00	36.11	32.80	10.11	23.90	55.12	68.20	-13.08	Horizontal
5650.00	37.43	32.36	9.72	23.83	55.68	68.20	-12.52	Vertical
5700.00	37.62	32.50	9.79	23.84	56.07	105.20	-49.13	Vertical
5720.00	35.38	32.53	9.81	23.85	53.87	110.80	-56.93	Vertical
5725.00	35.92	32.53	9.83	23.86	54.42	122.20	-67.78	Vertical
5850.00	35.23	32.70	9.99	23.87	54.05	122.20	-68.15	Vertical
5855.00	35.52	32.72	9.99	23.88	54.35	110.80	-56.45	Vertical
5875.00	34.61	32.74	10.04	23.89	53.50	105.20	-51.70	Vertical
5925.00	35.46	32.80	10.11	23.90	54.47	68.20	-13.73	Vertical


IEEE 802.11ac HT80								
Peak value:								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5650.00	34.84	32.36	9.72	23.83	53.09	68.20	-15.11	Horizontal
5700.00	34.43	32.50	9.79	23.84	52.88	105.20	-52.32	Horizontal
5720.00	37.05	32.53	9.81	23.85	55.54	110.80	-55.26	Horizontal
5725.00	33.29	32.53	9.83	23.86	51.79	122.20	-70.41	Horizontal
5850.00	36.77	32.70	9.99	23.87	55.59	122.20	-66.61	Horizontal
5855.00	37.28	32.72	9.99	23.88	56.11	110.80	-54.69	Horizontal
5875.00	36.51	32.74	10.04	23.89	55.40	105.20	-49.80	Horizontal
5925.00	34.63	32.80	10.11	23.90	53.64	68.20	-14.56	Horizontal
5650.00	34.17	32.36	9.72	23.83	52.42	68.20	-15.78	Vertical
5700.00	36.25	32.50	9.79	23.84	54.70	105.20	-50.50	Vertical
5720.00	36.52	32.53	9.81	23.85	55.01	110.80	-55.79	Vertical
5725.00	35.84	32.53	9.83	23.86	54.34	122.20	-67.86	Vertical
5850.00	34.71	32.70	9.99	23.87	53.53	122.20	-68.67	Vertical
5855.00	34.18	32.72	9.99	23.88	53.01	110.80	-57.79	Vertical
5875.00	33.27	32.74	10.04	23.89	52.16	105.20	-53.04	Vertical
5925.00	34.15	32.80	10.11	23.90	53.16	68.20	-15.04	Vertical



Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor

7.8 Spurious Emission

7.8.1 Radiated Emission Method

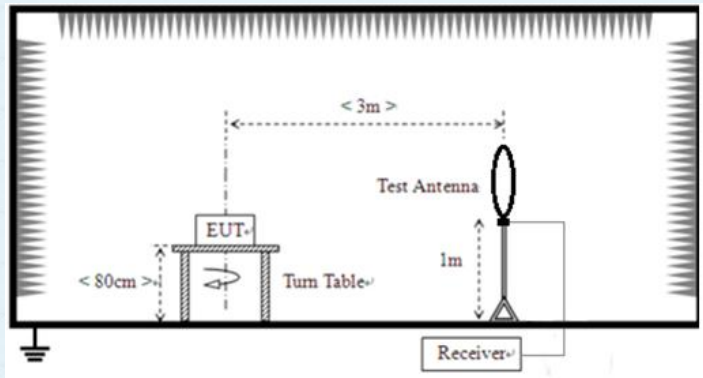Test Requirement:	FCC Part15 C Section 15.209, Part 15E Section 15.407(b)(4)				
Test Method:	ANSI C63.10:2013				
Test Frequency Range:	9kHz to 40GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	9kHz-150KHz	Quasi-peak	200Hz	1kHz	Quasi-peak Value
	150kHz-30MHz	Quasi-peak	9kHz	30kHz	Quasi-peak Value
	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
		AV	1MHz	3MHz	Average Value
Limit:	Frequency		Limit (uV/m)	Value	Measurement Distance
	0.009MHz-0.490MHz		2400/F(KHz)	QP	300m
	0.490MHz-1.705MHz		24000/F(KHz)	QP	300m
	1.705MHz-30MHz		30	QP	30m
	30MHz-88MHz		100	QP	3m
	88MHz-216MHz		150	QP	
	216MHz-960MHz		200	QP	
	960MHz-1GHz		500	QP	
	Frequency		Limit (dBm/MHz)		Remark
	Above 1GHz		-27.0		Peak Value
Test setup:	For radiated emissions from 9kHz to 30MHz				
					
	For radiated emissions from 30MHz to1GHz				

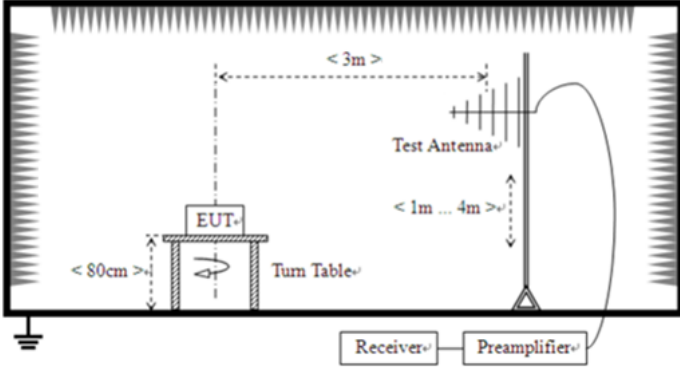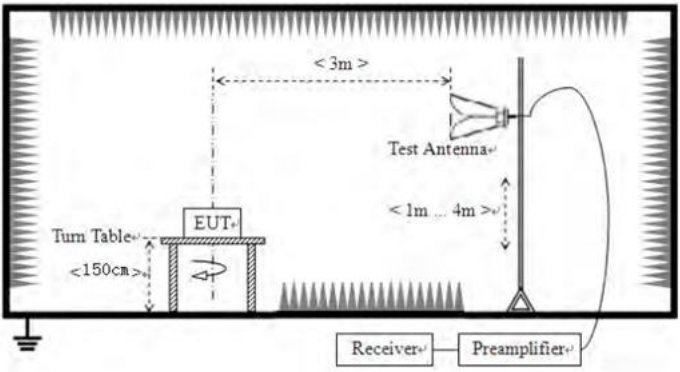	 For radiated emissions above 1GHz 
Test Procedure:	1. The EUT was placed on the top of a rotating table (0.8m for below 1GHz and 1.5 meters for above 1GHz) above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. 7. The radiation measurements are performed in X, Y, Z axis positioning.

	And found the X axis positioning which it is worse case, only the test worst case mode is recorded in the report.					
Test Instruments:	Refer to section 6.0 for details					
Test mode:	Refer to section 5.2 for details					
Test environment:	Temp.:	24.9 °C	Humid.:	48%	Press.:	1012mbar
Test voltage:	DC 5V					
Test results:	Pass					

Remarks:

1. Only the worst case Main Antenna test data.
2. Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis which it is worse case.


Measurement Data:**9 kHz ~ 30 MHz**

The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.

Below 1GHz


Pre-scan all test modes, found worst case at 802.11ac(HT20), and so only show the test result of 802.11ac(HT20)

Horizontal:

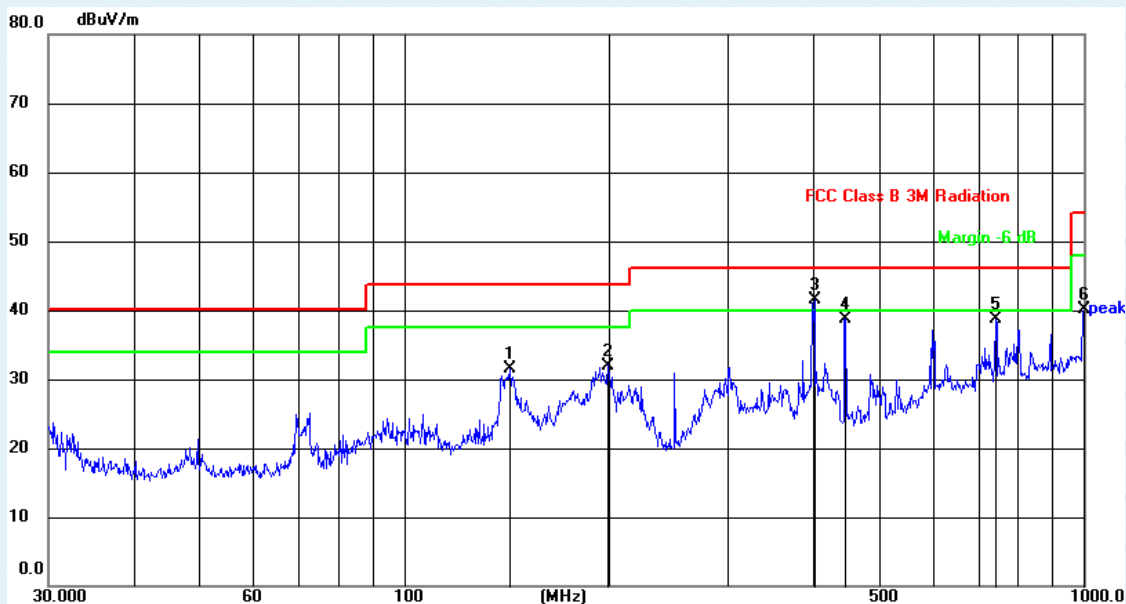

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	143.3259	50.29	-18.72	31.57	43.50	-11.93	QP
2	199.2855	50.52	-18.52	32.00	43.50	-11.50	QP
3	401.8383	57.86	-16.36	41.50	46.00	-4.50	QP
4	446.4139	53.64	-14.86	38.78	46.00	-7.22	QP
5	742.2586	47.09	-8.32	38.77	46.00	-7.23	QP
6	1000.0000	45.62	-5.45	40.17	54.00	-13.83	QP

Vertical:

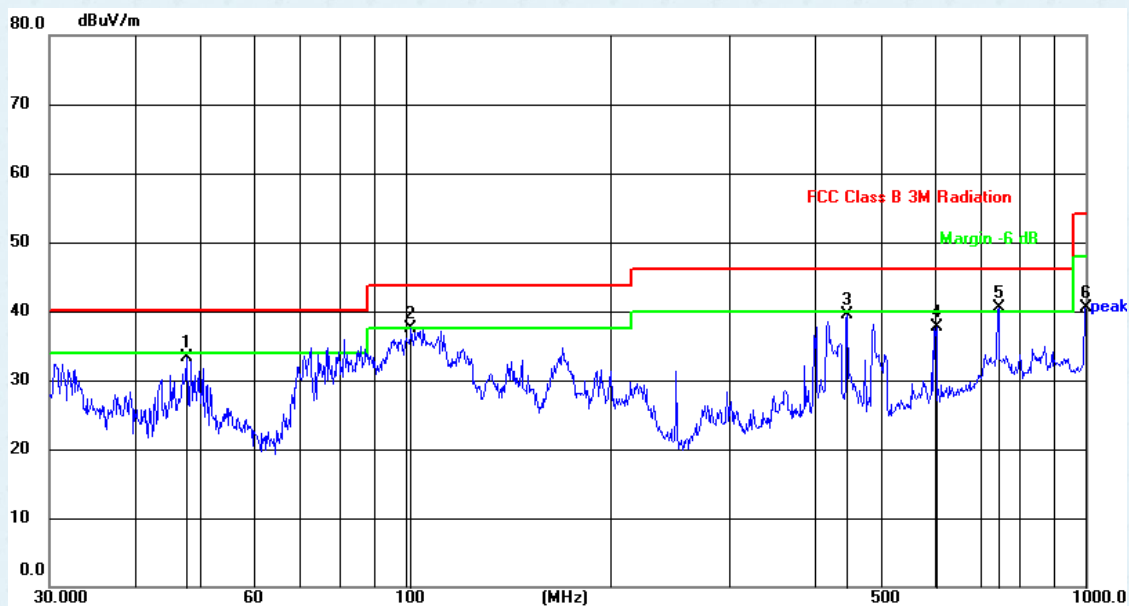

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	47.8260	54.31	-20.98	33.33	40.00	-6.67	QP
2	102.0013	57.47	-19.94	37.53	43.50	-5.97	QP
3	446.4139	54.34	-14.88	39.46	46.00	-6.54	QP
4	603.5390	48.87	-11.09	37.78	46.00	-8.22	QP
5	744.8659	48.75	-8.25	40.50	46.00	-5.50	QP
6	1000.0000	43.91	-3.45	40.46	54.00	-13.54	QP

Above 1GHz:

Test mode:		802.11a		Test channel:		lowest	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV/m)	Factor (dBuV/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
V	11490.00	25.62	21.64	47.26	54(Note3)	-6.74	PK
V	17235.00	22.35	21.80	44.15	54(Note3)	-9.85	PK
H	11490.00	24.94	21.83	46.77	54(Note3)	-7.23	PK
H	17235.00	23.19	21.67	44.86	54(Note3)	-9.14	PK

Test mode:		802.11a		Test channel:		Middle	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV/m)	Factor (dBuV/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
V	11570.00	25.69	21.64	47.33	54(Note3)	-6.67	PK
V	17355.00	24.12	21.80	45.92	54(Note3)	-8.08	PK
H	11570.00	26.47	21.83	48.30	54(Note3)	-5.70	PK
H	17355.00	23.99	21.67	45.66	54(Note3)	-8.34	PK

Test mode:		802.11a		Test channel:		Highest	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV/m)	Factor (dBuV/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
V	11650.00	26.61	21.64	48.25	54(Note3)	-5.75	PK
V	17475.00	24.53	21.80	46.33	54(Note3)	-7.67	PK
H	11650.00	25.17	21.83	47.00	54(Note3)	-7.00	PK
H	17475.00	23.24	21.67	44.91	54(Note3)	-9.09	PK

Test mode:		802.11n(HT20)		Test channel:		lowest	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV/m)	Factor (dBuV/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
V	11490.00	25.69	21.64	47.33	54(Note3)	-6.67	PK
V	17235.00	24.13	21.80	45.93	54(Note3)	-8.07	PK
H	11490.00	26.15	21.83	47.98	54(Note3)	-6.02	PK
H	17235.00	23.48	21.67	45.15	54(Note3)	-8.85	PK

Test mode:		802.11n(HT20)		Test channel:		Middle	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV/m)	Factor (dBuV/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
V	11570.00	27.25	21.64	48.06	54(Note3)	-5.94	PK
V	17355.00	25.01	21.80	47.66	54(Note3)	-6.34	PK
H	11570.00	25.26	21.83	46.24	54(Note3)	-7.76	PK
H	17355.00	23.41	21.67	44.60	54(Note3)	-9.40	PK

Test mode:		802.11n(HT20)		Test channel:		Highest	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV/m)	Factor (dBuV/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
V	11650.00	25.62	21.64	48.89	54(Note3)	-5.11	PK
V	17475.00	24.03	21.80	46.81	54(Note3)	-7.19	PK
H	11650.00	24.84	21.83	47.09	54(Note3)	-6.91	PK
H	17475.00	22.17	21.67	45.08	54(Note3)	-8.92	PK

Test mode:		802.11n(HT40)		Test channel:		Lowest	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV/m)	Factor (dBuV/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
V	11510.00	24.68	21.67	46.35	54(Note3)	-7.65	PK
V	17265.00	22.14	21.83	43.97	54(Note3)	-10.03	PK
H	11510.00	23.11	21.67	44.78	54(Note3)	-9.22	PK
H	17265.00	21.47	21.83	43.30	54(Note3)	-10.70	PK

Test mode:		802.11n(HT40)		Test channel:		Highest	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV/m)	Factor (dBuV/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
V	11590.00	24.14	21.67	45.81	54(Note3)	-8.19	PK
V	17385.00	22.36	21.83	44.19	54(Note3)	-9.81	PK
H	11590.00	23.37	21.67	45.04	54(Note3)	-8.96	PK
H	17385.00	21.58	21.83	43.41	54(Note3)	-10.59	PK

Test mode:		802.11ac(HT20)		Test channel:		lowest	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV/m)	Factor (dBuV/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
V	11490.00	26.27	21.64	47.91	54(Note3)	-6.09	PK
V	17235.00	24.62	21.80	46.42	54(Note3)	-7.58	PK
H	11490.00	25.24	21.83	47.07	54(Note3)	-6.93	PK
H	17235.00	22.84	21.67	44.51	54(Note3)	-9.49	PK

Test mode:		802.11ac(HT20)		Test channel:		Middle	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV/m)	Factor (dBuV/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
V	11570.00	26.38	21.64	48.02	54(Note3)	-5.98	PK
V	17355.00	24.82	21.80	46.62	54(Note3)	-7.38	PK
H	11570.00	25.35	21.83	47.18	54(Note3)	-6.82	PK
H	17355.00	21.49	21.67	43.16	54(Note3)	-10.84	PK

Test mode:		802.11ac(HT20)		Test channel:		Highest	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV/m)	Factor (dBuV/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
V	11650.00	26.37	21.64	48.01	54(Note3)	-5.99	PK
V	17475.00	23.64	21.80	45.44	54(Note3)	-8.56	PK
H	11650.00	26.12	21.83	47.95	54(Note3)	-6.05	PK
H	17475.00	23.58	21.67	45.25	54(Note3)	-8.75	PK

Test mode:		802.11ac(HT40)		Test channel:		Lowest	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV/m)	Factor (dBuV/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
V	11510.00	24.31	21.67	45.98	54(Note3)	-8.02	PK
V	17265.00	21.22	21.83	43.05	54(Note3)	-10.95	PK
H	11510.00	23.81	21.67	45.48	54(Note3)	-8.52	PK
H	17265.00	20.63	21.83	42.46	54(Note3)	-11.54	PK


Test mode:		802.11ac(HT40)		Test channel:		Highest	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV/m)	Factor (dBuV/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
V	11590.00	25.07	21.67	46.74	54(Note3)	-7.26	PK
V	17385.00	22.25	21.83	44.08	54(Note3)	-9.92	PK
H	11590.00	24.15	21.67	45.82	54(Note3)	-8.18	PK
H	17385.00	21.73	21.83	43.56	54(Note3)	-10.44	PK

Test mode:		802.11ac(HT80)		Test channel:		Middle	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV/m)	Factor (dBuV/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
V	11550.00	22.17	21.67	43.84	54(Note3)	-10.16	PK
V	17325.00	20.68	21.83	42.51	54(Note3)	-11.49	PK
H	11550.00	21.27	21.67	42.94	54(Note3)	-11.06	PK
H	17325.00	20.12	21.83	41.95	54(Note3)	-12.05	PK

Notes:

1. Measure Level = Reading Level + Factor.
2. The test trace is same as the ambient noise (the test frequency range: 18GHz~40GHz), therefore no data appear in the report.
3. This limit applies for using average detector, if the test result on peak is lower than average limit, then average measurement needn't be performed.

7.9 Frequency stability

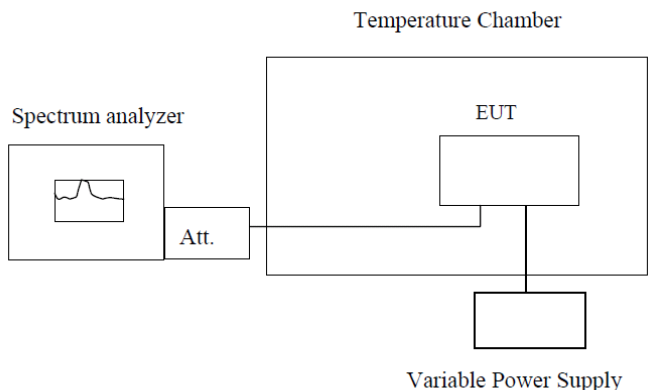Test Requirement:	FCC Part15 C Section 15.407(g)
Test Method:	ANSI C63.10:2013, FCC Part 2.1055
Limit:	Manufactures of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified
Test Procedure:	The EUT was setup to ANSI C63.4, 2003; tested to 2.1055 for compliance to FCC Part 15.407(g) requirements.
Test setup:	 Note : Measurement setup for testing on Antenna connector
Test Instruments:	Refer to section 5.10 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Measurement data:

Frequency stability versus Temp.					
Power Supply: AC 120V					
Temp. (°C)	Operating Frequency (MHz)	0 minute Measured Frequency (MHz)	2 minute Measured Frequency (MHz)	5 minute Measured Frequency (MHz)	10 minute Measured Frequency (MHz)
-30	5775	5774.98	5774.99	5774.96	5774.99
	5795	5794.99	5794.94	5794.98	5794.96
	5825	5824.99	5824.99	5824.99	5824.97
-20	5775	5774.98	5774.97	5775.00	5774.99
	5795	5794.99	5794.99	5795.00	5794.98
	5825	5824.97	5824.98	5824.98	5824.99
-10	5775	5774.94	5774.99	5774.99	5774.99
	5795	5794.99	5794.99	5794.98	5794.99
	5825	5824.96	5824.97	5824.99	5824.97
0	5775	5774.96	5774.99	5774.98	5774.99
	5795	5794.98	5794.94	5794.99	5794.98
	5825	5824.99	5824.97	5824.97	5824.96
10	5775	5774.99	5774.98	5774.94	5774.96
	5795	5794.94	5794.97	5794.99	5794.94
	5825	5824.99	5824.99	5824.96	5824.99
20	5775	5774.96	5774.99	5774.96	5774.97
	5795	5794.98	5794.98	5794.98	5794.98
	5825	5824.99	5824.99	5824.99	5824.99
30	5775	5774.99	5774.98	5774.99	5774.99
	5795	5794.99	5794.99	5794.94	5774.99
	5825	5824.97	5824.98	5824.99	5794.94
40	5775	5774.98	5774.99	5774.97	5824.97
	5795	5794.97	5794.98	5794.99	5774.98
	5825	5824.99	5824.99	5824.98	5794.97
50	5775	5774.98	5774.96	5774.99	5824.99
	5795	5794.97	5794.98	5794.94	5774.99
	5825	5824.99	5824.99	5824.99	5774.99

Frequency stability versus Voltage					
Temperature: 25°C					
Power Supply (VAC)	Operating Frequency (MHz)	0 minute Measured Frequency (MHz)	2 minute Measured Frequency (MHz)	5 minute Measured Frequency (MHz)	10 minute Measured Frequency (MHz)
102	5775	5775.00	5774.99	5774.97	5774.99
	5795	5794.99	5794.98	5794.94	5774.97
	5825	5824.98	5824.99	5824.99	5824.96
120	5775	5774.97	5794.97	5774.98	5774.99
	5795	5794.99	5794.98	5794.94	5774.97
	5825	5824.98	5824.99	5824.99	5824.98
138	5775	5774.97	5774.98	5774.97	5774.99
	5795	5794.94	5794.99	5794.94	5794.98
	5825	5824.99	5824.99	5824.99	5824.96

8 Test Setup Photo

Reference to the **appendix I** for details.

9 EUT Constructional Details

Reference to the **appendix II** for details.

-----END-----