



Test Report No.: W7L-P21100025RF01



FCC TEST REPORT

(Part 15, Subpart C)

Applicant:	COOSEA GROUP (HK) COMPANY LIMITED
Address:	UNIT 5-6 16/F MULTIFIELD PLAZA 3-7A PRAT AVENUE TSIMSHATSUI KL, HONG KONG, CHINA

Manufacturer or Supplier:	COOSEA GROUP (HK) COMPANY LIMITED
Address:	UNIT 5-6 16/F MULTIFIELD PLAZA 3-7A PRAT AVENUE TSIMSHATSUI KL, HONG KONG, CHINA
Product:	LTE Smartphone
Brand Name:	Cricket
Model Name:	SL100EA
FCC ID:	2A28USL100EA
Date of tests:	Oct. 27, 2021 ~ Dec. 23, 2021

The tests have been carried out according to the requirements of the following standard:

- FCC Part 15, Subpart C, Section 15.247**
- ANSI C63.10-2013**

CONCLUSION: The submitted sample was found to COMPLY with the test requirement

Prepared by Simon Wang Engineer / Mobile Department	Approved by Luke Lu Manager / Mobile Department

Date: Dec. 24, 2021

Date: Dec. 24, 2021

This report is governed by, and incorporates by reference, CPS Conditions of Service as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute you unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.



TABLE OF CONTENTS

RELEASE CONTROL RECORD	5
1 SUMMARY OF TEST RESULTS.....	6
1.1 MEASUREMENT UNCERTAINTY	7
2 GENERAL INFORMATION	8
2.1 GENERAL DESCRIPTION OF EUT	8
2.2 DESCRIPTION OF TEST MODES	9
2.2.1 CONFIGURATION OF SYSTEM UNDER TEST	10
2.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL.....	10
2.3 GENERAL DESCRIPTION OF APPLIED STANDARDS	12
2.4 DESCRIPTION OF SUPPORT UNITS.....	12
3 TEST TYPES AND RESULTS.....	13
3.1 CONDUCTED EMISSION MEASUREMENT.....	13
3.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT	13
3.1.2 TEST INSTRUMENTS.....	13
3.1.3 TEST PROCEDURES	13
3.1.4 DEVIATION FROM TEST STANDARD	14
3.1.5 TEST SETUP	14
3.1.6 EUT OPERATING CONDITIONS	14
3.1.7 TEST RESULTS.....	15
3.2 RADIATED EMISSION AND BANDEdge MEASUREMENT.....	17
3.2.1 LIMITS OF RADIATED EMISSION AND BANDEdge MEASUREMENT	17
3.2.2 TEST INSTRUMENTS.....	18
3.2.3 TEST PROCEDURES	19
3.2.4 DEVIATION FROM TEST STANDARD	19
3.2.5 TEST SETUP	20
3.2.6 EUT OPERATING CONDITIONS	21
3.2.7 TEST RESULTS.....	22
3.3 NUMBER OF HOPPING FREQUENCY USED	30
3.3.1 LIMIT OF HOPPING FREQUENCY USED	30
3.3.2 TEST SETUP	30
3.3.3 TEST INSTRUMENTS.....	30
3.3.4 TEST PROCEDURES	31
3.3.5 DEVIATION FROM TEST STANDARD	31
3.3.6 TEST RESULTS.....	31
3.4 DWELL TIME ON EACH CHANNEL.....	32



3.4.1	LIMIT OF DWELL TIME USED	32
3.4.2	TEST SETUP	32
3.4.3	TEST INSTRUMENTS	32
3.4.4	TEST PROCEDURES	32
3.4.5	DEVIATION FROM TEST STANDARD	33
3.4.6	TEST RESULTS	33
3.5	CHANNEL BANDWIDTH	34
3.5.1	LIMITS OF CHANNEL BANDWIDTH	34
3.5.2	TEST SETUP	34
3.5.3	TEST INSTRUMENTS	34
3.5.4	TEST PROCEDURE	34
3.5.5	DEVIATION FROM TEST STANDARD	34
3.5.6	EUT OPERATING CONDITION	35
3.5.7	TEST RESULTS	35
3.6	HOPPING CHANNEL SEPARATION	36
3.6.1	LIMIT OF HOPPING CHANNEL SEPARATION	36
3.6.2	TEST SETUP	36
3.6.3	TEST INSTRUMENTS	36
3.6.4	TEST PROCEDURES	36
3.6.5	DEVIATION FROM TEST STANDARD	36
3.6.6	TEST RESULTS	37
3.7	MAXIMUM OUTPUT POWER	37
3.7.1	LIMITS OF MAXIMUM OUTPUT POWER MEASUREMENT	37
3.7.2	TEST SETUP	37
3.7.3	TEST INSTRUMENTS	37
3.7.4	TEST PROCEDURES	37
3.7.5	DEVIATION FROM TEST STANDARD	38
3.7.6	EUT OPERATING CONDITION	38
3.7.7	TEST RESULTS	39
3.7.7.1	MAXIMUM PEAK OUTPUT POWER	39
3.7.7.2	AVERAGE OUTPUT POWER (FOR REFERENCE)	40
3.8	OUT OF BAND MEASUREMENT	41
3.8.1	LIMITS OF OUT OF BAND MEASUREMENT	41
3.8.2	TEST INSTRUMENTS	41
3.8.3	TEST PROCEDURE	41
3.8.4	DEVIATION FROM TEST STANDARD	41



Test Report No.: W7L-P21100025RF01

3.8.5	EUT OPERATING CONDITION.....	41
3.8.6	TEST RESULTS.....	41
4	PHOTOGRAPHS OF THE TEST CONFIGURATION.....	42
5	MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB	
	43	
6	APPENDIX	44



Test Report No.: W7L-P21100025RF01

BUREAU
VERITAS

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
W7L-P21100025RF01	Original release	Dec. 24, 2021



Test Report No.: W7L-P21100025RF01

1 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 15, Subpart C		
STANDARD	TEST TYPE AND LIMIT	RESULT
§15.207	AC Power Conducted Emission	Compliance
§15.247(a)(1) (iii)	Number of Hopping Frequency Used	Compliance
§15.247(a)(1) (iii)	Dwell Time on Each Channel	Compliance
§15.247(a)(1)	1. Hopping Channel Separation 2. Spectrum Bandwidth of a Frequency Hopping Sequence Spread Spectrum System	Compliance
§15.247(b)	Maximum Peak Output Power	Compliance
§15.247(d)& §15.209	Transmitter Radiated Emissions	Compliance
§15.247(d)	Out of band Measurement	Compliance
§15.203	Antenna Requirement	Compliance

Note: Except the data of RSE, other data please refer to APPENDIX A.

NOTE:

1. If the Frequency Hopping System operating in 2400-2483.5MHz band and the output power less than 125mW. The hopping channel carrier frequencies separated by a minimum of 25kHz or two-thirds of the 20dB bandwidth of hopping channel whichever is greater.
2. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

Test Lab Information Reference:

BV 7Layers Communications Technology (Shenzhen) Co. Ltd

Lab Address:

No.B102, Dazu Chuangxin Mansion, North of Beihuan Avenue, North Area, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, China

Accredited Test Lab Cert 3939.01



Test Report No.: W7L-P21100025RF01

1.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	UNCERTAINTY
AC Power Conducted emissions	±2.70dB
Radiated emissions (30MHz~1GHz)	±4.98dB
Radiated emissions (1GHz ~6GHz)	±4.70dB
Radiated emissions (6GHz ~18GHz)	±4.60dB
Radiated emissions (18GHz ~40GHz)	±4.12dB
Conducted emissions	±4.01dB
Occupied Channel Bandwidth	±43.58KHz
Conducted Output power	±2.06dB
Power Spectral Density	±0.85 dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.



Test Report No.: W7L-P21100025RF01

2 GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

PRODUCT	LTE Smartphone
BRAND NAME	Cricket
MODEL NAME	SL100EA
NOMINAL VOLTAGE	5.0Vdc(adapter or host equipment) 3.85Vdc (Li-ion, battery)
MODULATION TECHNOLOGY	FHSS
MODULATION TYPE	GFSK, 8DPSK, $\pi/4$ DQPSK
OPERATING FREQUENCY	2402MHz~2480MHz
NUMBER OF CHANNEL	79
MAX. OUTPUT POWER	12.08mW (Max. Measured)
ANTENNA TYPE	PIFA Antenna with 2.7dBi gain
HW VERSION	1.0
SW VERSION	SL100EAC010001
I/O PORTS	Refer to user's manual
CABLE SUPPLIED	USB cable: unshielded without ferrite, 1.0meter

NOTE:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
2. For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.
3. In the finger plate, dial the code for entering Engineer mode: *#*#3646633#*#*
EngineerMode->CONNECTIVITY->Wifi->Tx

List of Accessory:

ACCESSORIES	BRAND	MANUFACTURER	MODEL	SPECIFICATION
Battery	COOSEA	ZHONGSHAN TIANMAO BATTERY CO., LTD	BL-A32CT	Capacity : 3.85 Vdc, 3450mAh
AC Adapter	COOSEA	Guangdong Beicom Electronics Co., Ltd.	U312E0A050200	I/P:100-240V,50/60Hz,0.35A, O/P: 5.0V,2.0A 10.0W
USB Cable	COOSEA	Wivtak	TP-C0028-B3	Signal Line, 1.0meter



Test Report No.: W7L-P21100025RF01

2.2 DESCRIPTION OF TEST MODES

79 channels are provided to this EUT:

CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)
0	2402	20	2422	40	2442	60	2462
1	2403	21	2423	41	2443	61	2463
2	2404	22	2424	42	2444	62	2464
3	2405	23	2425	43	2445	63	2465
4	2406	24	2426	44	2446	64	2466
5	2407	25	2427	45	2447	65	2467
6	2408	26	2428	46	2448	66	2468
7	2409	27	2429	47	2449	67	2469
8	2410	28	2430	48	2450	68	2470
9	2411	29	2431	49	2451	69	2471
10	2412	30	2432	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	78	2480
19	2421	39	2441	59	2461		



Test Report No.: W7L-P21100025RF01

2.2.1 CONFIGURATION OF SYSTEM UNDER TEST

Please see section 5 photograph of the test configuration for reference.

2.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports.

The worst case was found when positioned on X axis for radiated emission. Following channel(s) was (were) selected for the final test as listed below:

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE<1G	RE≥1G	PLC	APCM	
-	√	√	√	√	-

Where RE<1G: Radiated Emission below 1GHz
 PLC: Power Line Conducted Emission

RE≥1G: Radiated Emission above 1GHz
APCM: Antenna Port Conducted Measurement

RADIATED EMISSION TEST (BELOW 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, XYZ axis, antenna ports (if EUT with antenna diversity architecture) and packet type.
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	PACKET TYPE
-	0 to 78	78	FHSS	GFSK	DH5

RADIATED EMISSION TEST (ABOVE 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, XYZ axis, antenna ports (if EUT with antenna diversity architecture) and packet type.
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	PACKET TYPE
-	0 to 78	0, 39, 78	FHSS	GFSK	DH5
-	0 to 78	0, 39, 78	FHSS	8DPSK	3DH5



Test Report No.: W7L-P21100025RF01

BUREAU
VERITAS

POWER LINE CONDUCTED EMISSION TEST:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, antenna ports (if EUT with antenna diversity architecture) and packet type.
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	PACKET TYPE
-	0 to 78	39	FHSS	8DPSK	3DH5

ANTENNA PORT CONDUCTED MEASUREMENT:

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, antenna ports (if EUT with antenna diversity architecture), and packet types.
- Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	PACKET TYPE
0 to 78	0, 39, 78	FHSS	GFSK	DH1/DH3/DH5
0 to 78	0, 39, 78	FHSS	$\pi/4$ DQPSK	2DH1/2DH3/2DH5
0 to 78	0, 39, 78	FHSS	8DPSK	3DH1/3DH3/3DH5

TEST CONDITION:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	TEST VOLTAGE (SYSTEM)	TESTED BY
RE<1G	23deg. C, 70%RH	DC 5V By Adapter	Jace Hu
RE≥1G	23deg. C, 70%RH	DC5V By Adapter	Jace Hu
PLC	25deg. C, 52%RH	DC5V By Adapter	James Fu
APCM	25deg. C, 60%RH	DC 3.85V By Battery	James Fu



Test Report No.: W7L-P21100025RF01

2.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C. Section 15.247

ANSI C63.10-2013

NOTE:

1. All test items have been performed and recorded as per the above standards.
2. The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (Certification). The test report has been issued separately.

2.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	Desktop	Lenovo	M73 SFF	PC04GRQV	N/A
2	Desktop	Lenovo	M73 SFF	PC06CS27	N/A
3	Laptop	Lenovo	Thnikpad L440	R90FTFKN	N/A

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	AC Line: Unshielded, Detachable 1.5m
2	AC Line: Unshielded, Detachable 1.5m
3	AC Line: Unshielded, Detachable 1.5m



Test Report No.: W7L-P21100025RF01

3 TEST TYPES AND RESULTS

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
0.15 ~ 0.5 0.5 ~ 5 5 ~ 30	Quasi-peak	Average
	66 to 56	56 to 46
	56	46
	60	50

NOTE: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.
3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

3.1.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESR3	101900	Mar. 03,21	Mar. 02,22
EMC32 test software	Rohde&Schwarz	EMC32	NA	NA	NA
LISN network	Rohde&Schwarz	ENV216	101922	Feb. 25,21	Feb. 24,22

NOTE: 1. The test was performed in CE shielded room.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GRRG/CHINA and NIM/CHINA.

3.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.




Test Report No.: W7L-P21100025RF01

NOTE: All modes of operation were investigated and the worst-case emissions are reported.

3.1.4 DEVIATION FROM TEST STANDARD

No deviation.

3.1.5 TEST SETUP

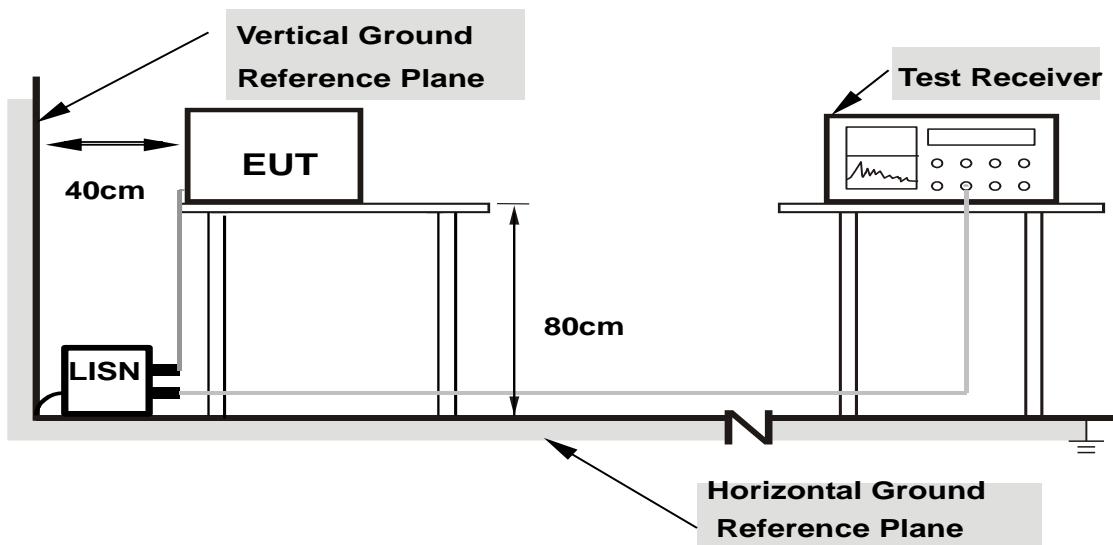

Note:

1. Support units were connected to second LISN.
2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

For the actual test configuration, please refer to the attached file (Test Setup Photo).

3.1.6 EUT OPERATING CONDITIONS

- Turned on the power and connected of all equipment.
- EUT was operated according to the type used was description in manufacturer's specifications or the User's Manual.



Test Report No.: W7L-P21100025RF01

3.1.7 TEST RESULTS


CONDUCTED WORST-CASE DATA:

Frequency Range	150KHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120Vac, 60Hz	Environmental Conditions	26deg. C, 51%RH
Tested By	Carl xie		

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.492000	---	18.91	46.13	27.22	L1	ON	9.7
0.492000	36.48	---	56.13	19.65	L1	ON	9.7
0.824000	---	16.21	46.00	29.79	L1	ON	9.7
0.824000	28.09	---	56.00	27.91	L1	ON	9.7
1.476000	---	15.69	46.00	30.31	L1	ON	9.7
1.476000	27.08	---	56.00	28.92	L1	ON	9.7
2.536000	---	15.57	46.00	30.43	L1	ON	9.7
2.536000	25.40	---	56.00	30.60	L1	ON	9.7
11.008000	---	18.56	50.00	31.44	L1	ON	9.8
11.008000	31.49	---	60.00	28.51	L1	ON	9.8
26.824000	---	20.62	50.00	29.38	L1	ON	9.8
26.824000	33.24	---	60.00	26.76	L1	ON	9.8

REMARKS: 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.

2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Limit value - Emission level
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

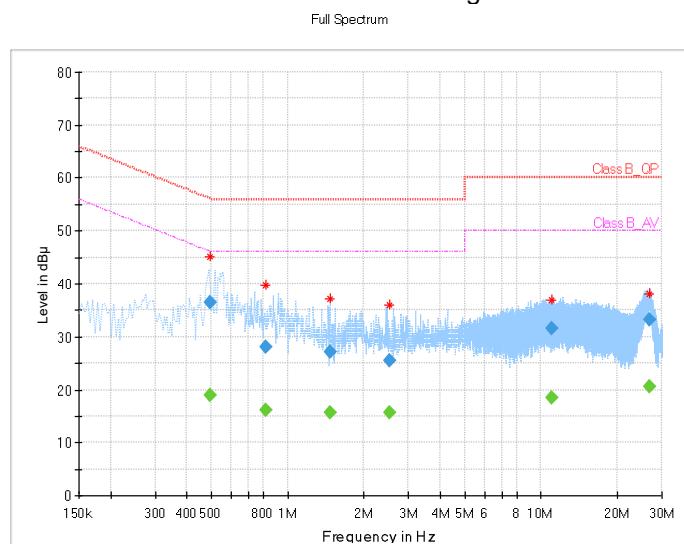



Test Report No.: W7L-P21100025RF01


BUREAU
VERITAS

Frequency Range	150KHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120Vac, 60Hz	Environmental Conditions	26deg. C, 51%RH
Tested By	Carl xie		

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.532000	---	32.64	46.00	13.36	N	ON	9.7
0.532000	46.25	---	56.00	9.75	N	ON	9.7
0.960000	---	23.94	46.00	22.06	N	ON	9.7
0.960000	35.96	---	56.00	20.04	N	ON	9.7
2.162000	---	21.29	46.00	24.71	N	ON	9.8
2.162000	32.18	---	56.00	23.82	N	ON	9.8
3.764000	---	20.70	46.00	25.30	N	ON	9.8
3.764000	31.09	---	56.00	24.91	N	ON	9.8
6.752000	---	19.93	50.00	30.07	N	ON	9.8
6.752000	29.62	---	60.00	30.38	N	ON	9.8
26.472000	---	23.10	50.00	26.90	N	ON	9.9
26.472000	33.97	---	60.00	26.03	N	ON	9.9

REMARKS: 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.

2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Limit value - Emission level
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

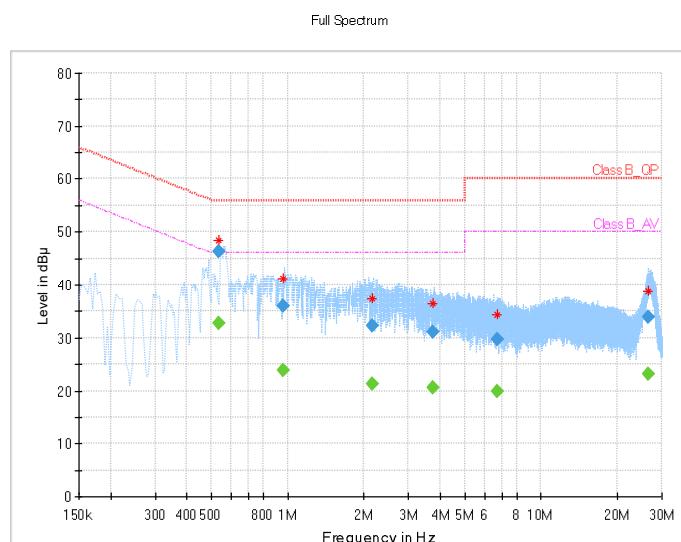



Test Report No.: W7L-P21100025RF01

BUREAU
VERITAS

3.2 RADIATED EMISSION AND BANDEDGE MEASUREMENT

3.2.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a). Other emissions shall be at least 20dB below the highest level of the desired power.

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dB_{uV/m}) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



Test Report No.: W7L-P21100025RF01

3.2.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
3m Semi-anechoic Chamber	ETS-LINDGREN	9m*6m*6m	Euroshieldpn-CT0001143-1216	May. 19,20	May. 18,23
Bilog Antenna	ETS-LINDGREN	3143B	00161965	Mar. 05,21	Mar. 04,22
Horn Antenna	ETS-LINDGREN	3117	00168728	Apr. 02, 21	Apr. 01, 22
Horn Antenna (18GHz-40GHz)	N/A	QWH-SL-18-40-K-SG/QMS-003 61	15433	Aug. 25, 21	Aug. 24, 22
Test Software	E3	V 9.160323	N/A	N/A	N/A
Test Software	ADT	ADT_Radiated_V7.6.15.9.2	N/A	N/A	N/A
10dB Attenuator	JFW/USA	50HF-010-SMA	1505	Jun. 03,21	Jun. 02,22
MXE EMI Receiver	KEYSIGHT	N9038A-544	MY54450026	Apr. 27,21	Apr. 26,22
Signal Pre-Amplifier	EMSI	EMC 9135	980249	Jun. 02,21	Jun. 01,22
Signal Pre-Amplifier	EMSI	EMC 012645B	980257	Jun. 02,21	Jun. 01,22
Signal Pre-Amplifier	EMSI	EMC 184045B	980259	Apr. 30,21	Apr. 29,22
DC Source	Kikusui/JP	PMX18-5A	0000001	Aug. 25,21	Aug. 24,22
Power Meter	Anritsu	ML2495A	1506002	Feb. 25,21	Feb. 24,22
Power Sensor	Anritsu	MA2411B	1339352	Feb. 25,21	Feb. 24,22
Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-051	Feb 14,20	Feb. 13,23

NOTE: 1. The calibration interval of the above test instruments is 12 months or 36 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
2. The test was performed in 3m Chamber.
3. The FCC Site Registration No. is 525120; The Designation No. is CN1171.



3.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters (for below 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, For battery operated equipment, the equipment tests shall be perform using fresh batteries. The turntable was rotated to maximize the emission level.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz for Average detection (AV) at frequency above 1GHz.
4. If the dwell time per channel of the hopping signal is less than 100 ms, then the reading obtained with the 10 Hz VBW may be further adjusted by a "duty cycle correction factor", derived from $20\log(\text{dwell time}/100 \text{ ms})$, in an effort to demonstrate compliance with the 15.209 limit.
5. All modes of operation were investigated and the worst-case emissions are reported.

3.2.4 DEVIATION FROM TEST STANDARD


No deviation.




Test Report No.: W7L-P21100025RF01


3.2.5 TEST SETUP

<Frequency Range 9KHz~30MHz >

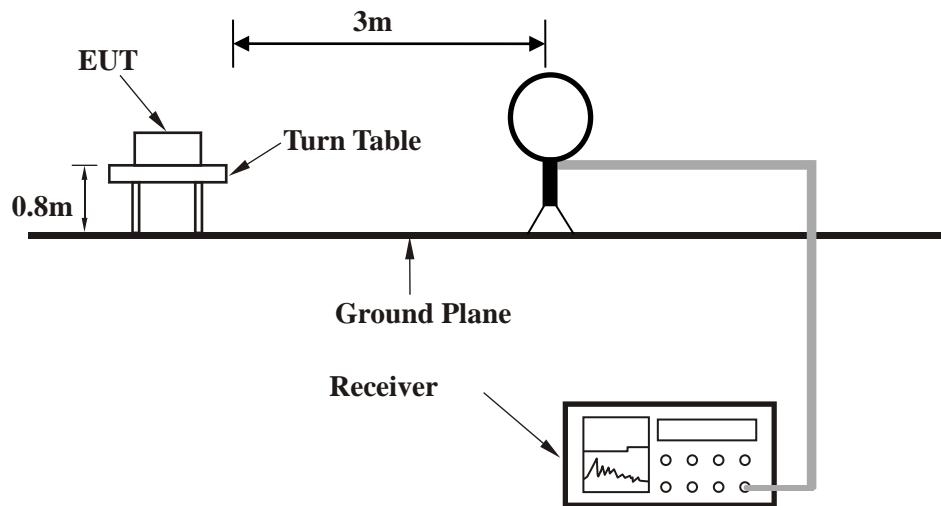

< Frequency Range 30MHz~1GHz >

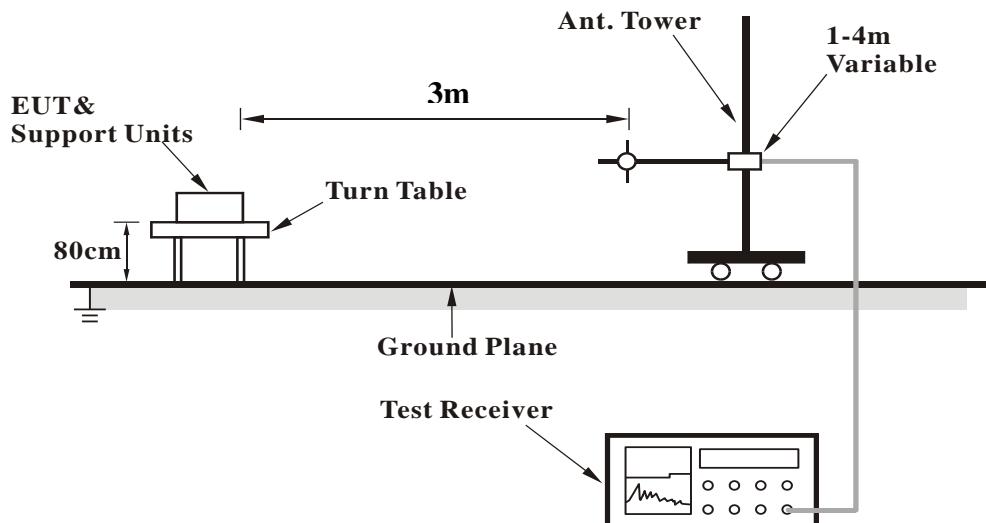
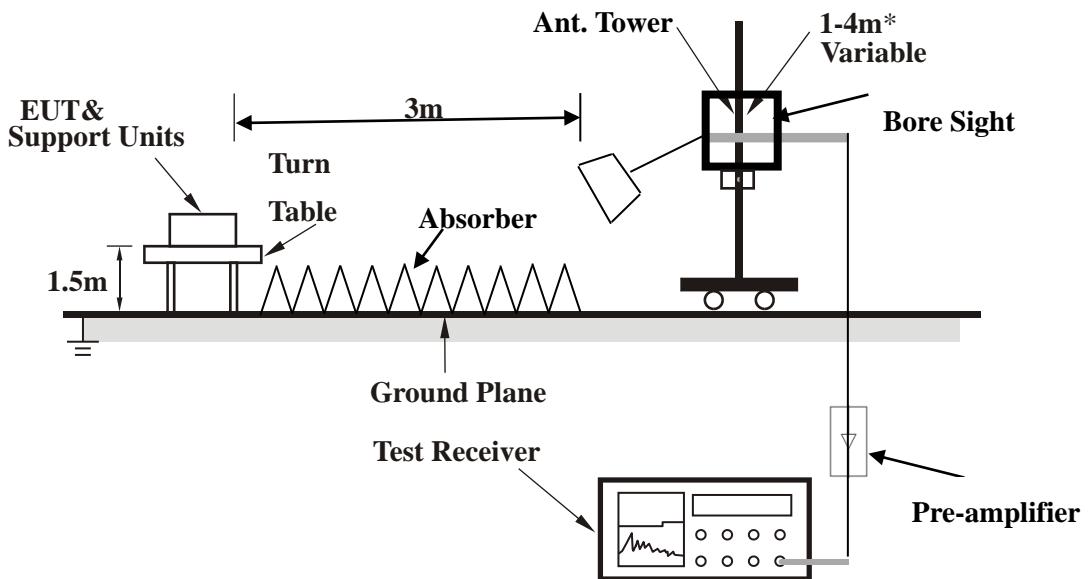
<Frequency Range above 1GHz>


Note: Above 1G is a directional antenna

Depends on the EUT height and the antenna 3dB beamwidth both, refer to section 7.3 of CISPR 16-2-3.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

3.2.6 EUT OPERATING CONDITIONS

- Set the EUT under full load condition and placed them on a testing table.
- Set the transmitter part of EUT under transmission condition continuously at specific channel frequency.
- The necessary accessories enable the EUT in full functions.



Test Report No.: W7L-P21100025RF01

BUREAU
VERITAS

3.2.7 TEST RESULTS

BELOW 1GHz WORST-CASE DATA:

Note: For frequency below 30MHz, the emission was tested 20db below the limit so the data not recorded in the sheet.

30 MHz – 1GHz data:


GFSK

CHANNEL	Channel 78	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
83.361	31.4	60.34	40	-8.6	7.87	0.5	37.31	200	0	Peak
155.13	34.75	60.58	43.5	-8.75	10.27	0.67	36.77	200	0	Peak
290.93	23.8	45.78	46	-22.2	13.85	0.9	36.73	200	0	Peak
422.85	24.14	42.59	46	-21.86	17.31	1.11	36.87	200	0	Peak
562.53	19.84	35.81	46	-26.16	19.95	1.31	37.23	200	0	Peak
678.848	24.48	38.25	46	-21.52	22.28	1.45	37.5	200	0	Peak

REMARKS:

1. Emission Level(dBuV/m) = Read Level(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

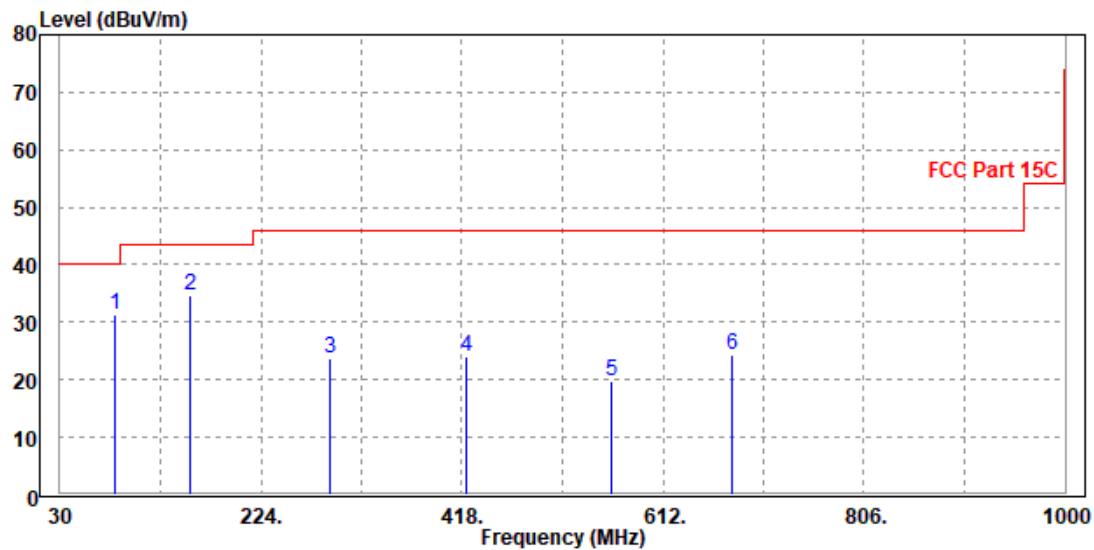



Test Report No.: W7L-P21100025RF01


BUREAU
VERITAS

CHANNEL	Channel 78	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M											
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK	
30.97	32.44	49.71	40	-7.56	19.77	0.32	37.36	300	0	Peak	
89.17	29.91	58.18	43.5	-13.59	8.48	0.51	37.26	300	0	Peak	
156.1	32.51	57.69	43.5	-10.99	10.92	0.67	36.77	300	0	Peak	
335.55	19.36	39.39	46	-26.64	15.78	0.97	36.78	300	0	Peak	
422.85	23.04	41.17	46	-22.96	17.63	1.11	36.87	300	0	Peak	
594.54	24.14	39.34	46	-21.86	20.8	1.35	37.35	300	0	Peak	

REMARKS:

1. Emission Level(dBuV/m) = Read Level(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

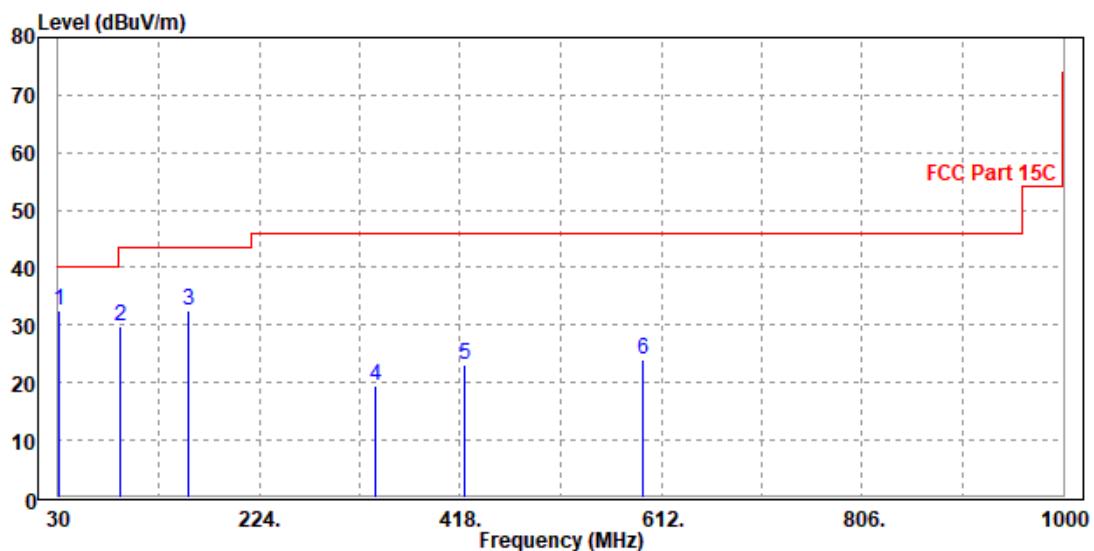



Test Report No.: W7L-P21100025RF01

BUREAU
VERITAS

ABOVE 1GHz WORST-CASE DATA:

Note: For higher frequency, the emission is too low to be detected.

GFSK

CHANNEL	TX Channel 0	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	51.95	60.71	74	-22.05	31.75	5.86	46.37	113	203	Peak
2390	44.93	53.69	54	-9.07	31.75	5.86	46.37	113	203	Average
2402	106.47	115.17			31.79	5.88	46.37	113	203	Peak
2402	106.44	115.14			31.79	5.88	46.37	113	203	Average
2483.5	53.16	61.49	74	-20.84	32.05	5.99	46.37	113	203	Peak
2483.5	44.69	53.02	54	-9.31	32.05	5.99	46.37	113	203	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	52.65	61.02	74	-21.35	32.14	5.86	46.37	100	233	Peak
2390	44.71	53.08	54	-9.29	32.14	5.86	46.37	100	233	Average
2402	101.46	109.79			32.16	5.88	46.37	100	233	Peak
2402	100.89	109.22			32.16	5.88	46.37	100	233	Average
2483.5	52.77	60.79	74	-21.23	32.36	5.99	46.37	100	233	Peak
2483.5	45.08	53.1	54	-8.92	32.36	5.99	46.37	100	233	Average

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 2402MHz: Fundamental frequency.



Test Report No.: W7L-P21100025RF01

BUREAU
VERITAS

CHANNEL	TX Channel 39	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M											
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK	
2390	52.7	61.46	74	-21.3	31.75	5.86	46.37	120	315	Peak	
2390	44.57	53.33	54	-9.43	31.75	5.86	46.37	120	315	Average	
2441	108.48	117.01			31.91	5.93	46.37	120	315	Peak	
2441	108.41	116.94			31.91	5.93	46.37	120	315	Average	
2483.5	52.95	61.28	74	-21.05	32.05	5.99	46.37	120	315	Peak	
2483.5	45.3	53.63	54	-8.7	32.05	5.99	46.37	120	315	Average	

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M											
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK	
2390	52.23	60.6	74	-21.77	32.14	5.86	46.37	100	233	Peak	
2390	45.03	53.4	54	-8.97	32.14	5.86	46.37	100	233	Average	
2441	103.37	111.55			32.26	5.93	46.37	100	233	Peak	
2441	103.23	111.41			32.26	5.93	46.37	100	233	Average	
2483.5	53.44	61.46	74	-20.56	32.36	5.99	46.37	100	233	Peak	
2483.5	45.32	53.34	54	-8.68	32.36	5.99	46.37	100	233	Average	

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 2441MHz: Fundamental frequency.



Test Report No.: W7L-P21100025RF01

BUREAU
VERITAS

CHANNEL	TX Channel 78	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M											
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK	
2390	53.35	62.11	74	-20.65	31.75	5.86	46.37	118	315	Peak	
2390	44.8	53.56	54	-9.2	31.75	5.86	46.37	118	315	Average	
2480	108.14	116.49			32.04	5.98	46.37	118	315	Peak	
2480	107.96	116.31			32.04	5.98	46.37	118	315	Average	
2483.5	54.5	62.83	74	-19.5	32.05	5.99	46.37	118	315	Peak	
2483.5	46.9	55.23	54	-7.1	32.05	5.99	46.37	118	315	Average	

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M											
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK	
2390	53.55	61.92	74	-20.45	32.14	5.86	46.37	100	185	Peak	
2390	44.94	53.31	54	-9.06	32.14	5.86	46.37	100	185	Average	
2480	102.96	111			32.35	5.98	46.37	100	185	Peak	
2480	102.64	110.68			32.35	5.98	46.37	100	185	Average	
2483.5	53.25	61.27	74	-20.75	32.36	5.99	46.37	100	185	Peak	
2483.5	45.13	53.15	54	-8.87	32.36	5.99	46.37	100	185	Average	

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 2480MHz: Fundamental frequency.



Test Report No.: W7L-P21100025RF01

BUREAU
VERITAS

BT_8DPSK

CHANNEL	TX Channel 0	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	51.62	60.38	74	-22.38	31.75	5.86	46.37	110	200	Peak
2390	44.52	53.28	54	-9.48	31.75	5.86	46.37	110	200	Average
2402	106.74	115.44			31.79	5.88	46.37	110	200	Peak
2402	106.52	115.22			31.79	5.88	46.37	110	200	Average
2483.5	52.86	61.19	74	-21.14	32.05	5.99	46.37	110	200	Peak
2483.5	45.14	53.47	54	-8.86	32.05	5.99	46.37	110	200	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	52.49	60.86	74	-21.51	32.14	5.86	46.37	100	263	Peak
2390	45.13	53.5	54	-8.87	32.14	5.86	46.37	100	263	Average
2402	101.09	109.42			32.16	5.88	46.37	100	263	Peak
2402	100.97	109.3			32.16	5.88	46.37	100	263	Average
2483.5	53.36	61.38	74	-20.64	32.36	5.99	46.37	100	263	Peak
2483.5	45.2	53.22	54	-8.8	32.36	5.99	46.37	100	263	Average

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 2402MHz: Fundamental frequency.



Test Report No.: W7L-P21100025RF01

BUREAU
VERITAS

CHANNEL	TX Channel 39	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M											
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK	
2390	51.75	60.51	74	-22.25	31.75	5.86	46.37	115	230	Peak	
2390	44.48	53.24	54	-9.52	31.75	5.86	46.37	115	230	Average	
2441	102.43	110.96			31.91	5.93	46.37	115	230	Peak	
2441	102.25	110.78			31.91	5.93	46.37	115	230	Average	
2483.5	52.74	61.07	74	-21.26	32.05	5.99	46.37	115	230	Peak	
2483.5	44.95	53.28	54	-9.05	32.05	5.99	46.37	115	230	Average	

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M											
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK	
2390	51.95	60.32	74	-22.05	32.14	5.86	46.37	100	280	Peak	
2390	44.88	53.25	54	-9.12	32.14	5.86	46.37	100	280	Average	
2441	100.92	109.1			32.26	5.93	46.37	100	280	Peak	
2441	100.68	108.86			32.26	5.93	46.37	100	280	Average	
2483.5	53.14	61.16	74	-20.86	32.36	5.99	46.37	100	280	Peak	
2483.5	45.38	53.4	54	-8.62	32.36	5.99	46.37	100	280	Average	

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 2441MHz: Fundamental frequency.



Test Report No.: W7L-P21100025RF01

BUREAU
VERITAS

CHANNEL	TX Channel 78	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M											
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK	
2390	51.88	60.64	74	-22.12	31.75	5.86	46.37	120	300	Peak	
2390	44.19	52.95	54	-9.81	31.75	5.86	46.37	120	300	Average	
2480	105.32	113.67			32.04	5.98	46.37	120	300	Peak	
2480	105.34	113.69			32.04	5.98	46.37	120	300	Average	
2483.5	52.35	60.68	74	-21.65	32.05	5.99	46.37	120	300	Peak	
2483.5	45.41	53.74	54	-8.59	32.05	5.99	46.37	120	300	Average	

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M											
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK	
2390	52.6	60.97	74	-21.4	32.14	5.86	46.37	100	205	Peak	
2390	44.9	53.27	54	-9.1	32.14	5.86	46.37	100	205	Average	
2480	101.47	109.51			32.35	5.98	46.37	100	205	Peak	
2480	101.48	109.52			32.35	5.98	46.37	100	205	Average	
2483.5	52.55	60.57	74	-21.45	32.36	5.99	46.37	100	205	Peak	
2483.5	45.43	53.45	54	-8.57	32.36	5.99	46.37	100	205	Average	

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 2480MHz: Fundamental frequency.




Test Report No.: W7L-P21100025RF01

3.3 NUMBER OF HOPPING FREQUENCY USED

3.3.1 LIMIT OF HOPPING FREQUENCY USED

At least 15 channels frequencies, and should be equally spaced.

3.3.2 TEST SETUP

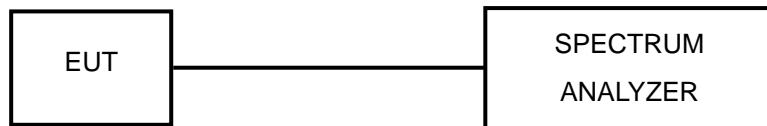

3.3.3 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Power Meter	ANRITSU	ML2495A	1506002	Feb. 25,21	Feb. 24,22
EXA Signal Analyzer	KEYSIGHT	N9010A-526	MY54510322	Apr. 26,21	Apr. 25,22
EXA Signal Analyzer	KEYSIGHT	N9010A-544	MY54510355	Feb. 25,21	Feb. 24,22
Power Sensor	ANRITSU	MA2411B	1339352	Feb. 25,21	Feb. 24,22
CBT32 BLUETOOTH TESTER 4HU	Rohde&Schwarz	CBT32	101176	Mar. 09,21	Mar. 08,22

NOTE:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GRRG/CHINA and NIM/CHINA.
2. The test was performed in RF Oven room.



3.3.4 TEST PROCEDURES

- a. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
- c. Set the SA on MaxHold Mode, and then keep the EUT in hopping mode. Record all the signals from each channel until each one has been recorded.
- d. Set the SA on View mode and then plot the result on SA screen.
- e. Repeat above procedures until all frequencies measured were completed.

3.3.5 DEVIATION FROM TEST STANDARD

No deviation.

3.3.6 TEST RESULTS

There are 79 hopping frequencies in the hopping mode. Please refer to next two pages for the test result. On the plots, it shows that the hopping frequencies are equally spaced.

Please Refer to Appendix A Of this test report.




3.4 DWELL TIME ON EACH CHANNEL

3.4.1 LIMIT OF DWELL TIME USED

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

3.4.2 TEST SETUP



3.4.3 TEST INSTRUMENTS

Refer to section 3.3.3 to get information of above instrument.

3.4.4 TEST PROCEDURES

- a. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
- c. Adjust the center frequency of SA on any frequency to be measured and set SA to zero span mode. And then, set RBW and VBW of spectrum analyzer to proper value.
- d. Measure the time duration of one transmission on the measured frequency. And then plot the result with time difference of this time duration.
- e. Repeat above procedures until all different time-slot modes have been completed.



Test Report No.: W7L-P21100025RF01

3.4.5 DEVIATION FROM TEST STANDARD

No deviation.

3.4.6 TEST RESULTS

Please Refer to Appendix A Of this test report




3.5 CHANNEL BANDWIDTH

3.5.1 LIMITS OF CHANNEL BANDWIDTH

For frequency hopping system operating in the 2400-2483.5MHz, If the 20dB bandwidth of hopping channel is greater than 25kHz, two-thirds 20dB bandwidth of hopping channel shall be a minimum limit for the hopping channel separation.

3.5.2 TEST SETUP



3.5.3 TEST INSTRUMENTS

Refer to section 3.3.3 to get information of above instrument.

3.5.4 TEST PROCEDURE

- a. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- c. Measure the frequency difference of two frequencies that were attenuated 20dB from the reference level. Record the frequency difference as the emission bandwidth.
- d. Repeat above procedures until all frequencies measured were complete.

3.5.5 DEVIATION FROM TEST STANDARD

No deviation.



Test Report No.: W7L-P21100025RF01

3.5.6 EUT OPERATING CONDITION

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

3.5.7 TEST RESULTS

Please Refer to Appendix A Of this test report.




Test Report No.: W7L-P21100025RF01

3.6 HOPPING CHANNEL SEPARATION

3.6.1 LIMIT OF HOPPING CHANNEL SEPARATION

At least 25kHz or two-third of 20dB hopping channel bandwidth (whichever is greater).

3.6.2 TEST SETUP



3.6.3 TEST INSTRUMENTS

Refer to section 3.3.3 to get information of above instrument.

3.6.4 TEST PROCEDURES

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range.
3. By using the MaxHold function record the separation of two adjacent channels.
4. Measure the frequency difference of these two adjacent channels by SA MARK function. And then plot the result on SA screen.
5. Repeat above procedures until all frequencies measured were complete.

3.6.5 DEVIATION FROM TEST STANDARD

No deviation.



Test Report No.: W7L-P21100025RF01

3.6.6 TEST RESULTS


Please Refer to Appendix A Of this test report.

3.7 MAXIMUM OUTPUT POWER

3.7.1 LIMITS OF MAXIMUM OUTPUT POWER MEASUREMENT

The Maximum Output Power Measurement is 125mW.

3.7.2 TEST SETUP

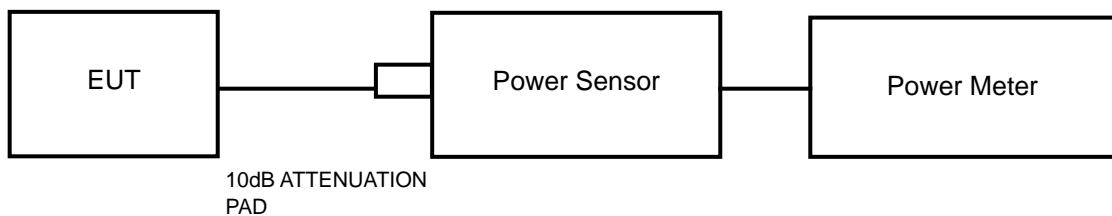

3.7.3 TEST INSTRUMENTS

Refer to section 3.3.3 to get information of above instrument.

3.7.4 TEST PROCEDURES

A peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor. Record the power level.



Test Report No.: W7L-P21100025RF01

3.7.5 DEVIATION FROM TEST STANDARD

No deviation.

3.7.6 EUT OPERATING CONDITION

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



Test Report No.: W7L-P21100025RF01

3.7.7 TEST RESULTS

3.7.7.1 MAXIMUM PEAK OUTPUT POWER

Please Refer to Appendix A Of this test report.



Test Report No.: W7L-P21100025RF01

3.7.7.2 Average Output Power (FOR REFERENCE)

The average power sensor was used on the output port of the EUT. A power meter was used to read the response of the power sensor. Record the power level.

Please Refer to Appendix A Of this test report.



Test Report No.: W7L-P21100025RF01

3.8 OUT OF BAND MEASUREMENT

3.8.1 LIMITS OF OUT OF BAND MEASUREMENT

Below –20dB of the highest emission level of operating band (in 100KHz RBW).

3.8.2 TEST INSTRUMENTS

Refer to section 3.3.3 to get information of above instrument.

3.8.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low loss cable. Spectrum Analyzer was set RBW to 100 kHz and VBW to 300 kHz with suitable frequency span including 100 MHz bandwidth from band edge. Detector = PEAK and Trace mode = Max Hold. The band edges was measured and recorded.

3.8.4 DEVIATION FROM TEST STANDARD

No deviation.

3.8.5 EUT OPERATING CONDITION

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

3.8.6 TEST RESULTS

The spectrum plots are attached on the following images. D1 line indicates the highest level. D2 line indicates the 20dB offset below D1. It shows compliance to the requirement.

Please Refer to Appendix A Of this test report.



Test Report No.: W7L-P21100025RF01

4 PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



Test Report No.: W7L-P21100025RF01

5 MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.



Test Report No.: W7L-P21100025RF01

6 APPENDIX A



Report No.: W7L-P21100025RF01

Appendix A : 2.4G BT2.0

Bandwidth

OBW


Test Result

Mode	TX Type	Frequency (MHz)	Packet Type	Ant	99% Occupied Bandwidth (MHz)		Verdict
					Result		
GFSK	SISO	2402	DH5	1	0.747		Pass
		2441	DH5	1	0.744		Pass
		2480	DH5	1	0.749		Pass
Pi/4DQPSK	SISO	2402	2DH5	1	1.140		Pass
		2441	2DH5	1	1.139		Pass
		2480	2DH5	1	1.142		Pass
8DPSK	SISO	2402	3DH5	1	1.147		Pass
		2441	3DH5	1	1.147		Pass
		2480	3DH5	1	1.153		Pass



Report No.: W7L-P21100025RF01


Test Graph

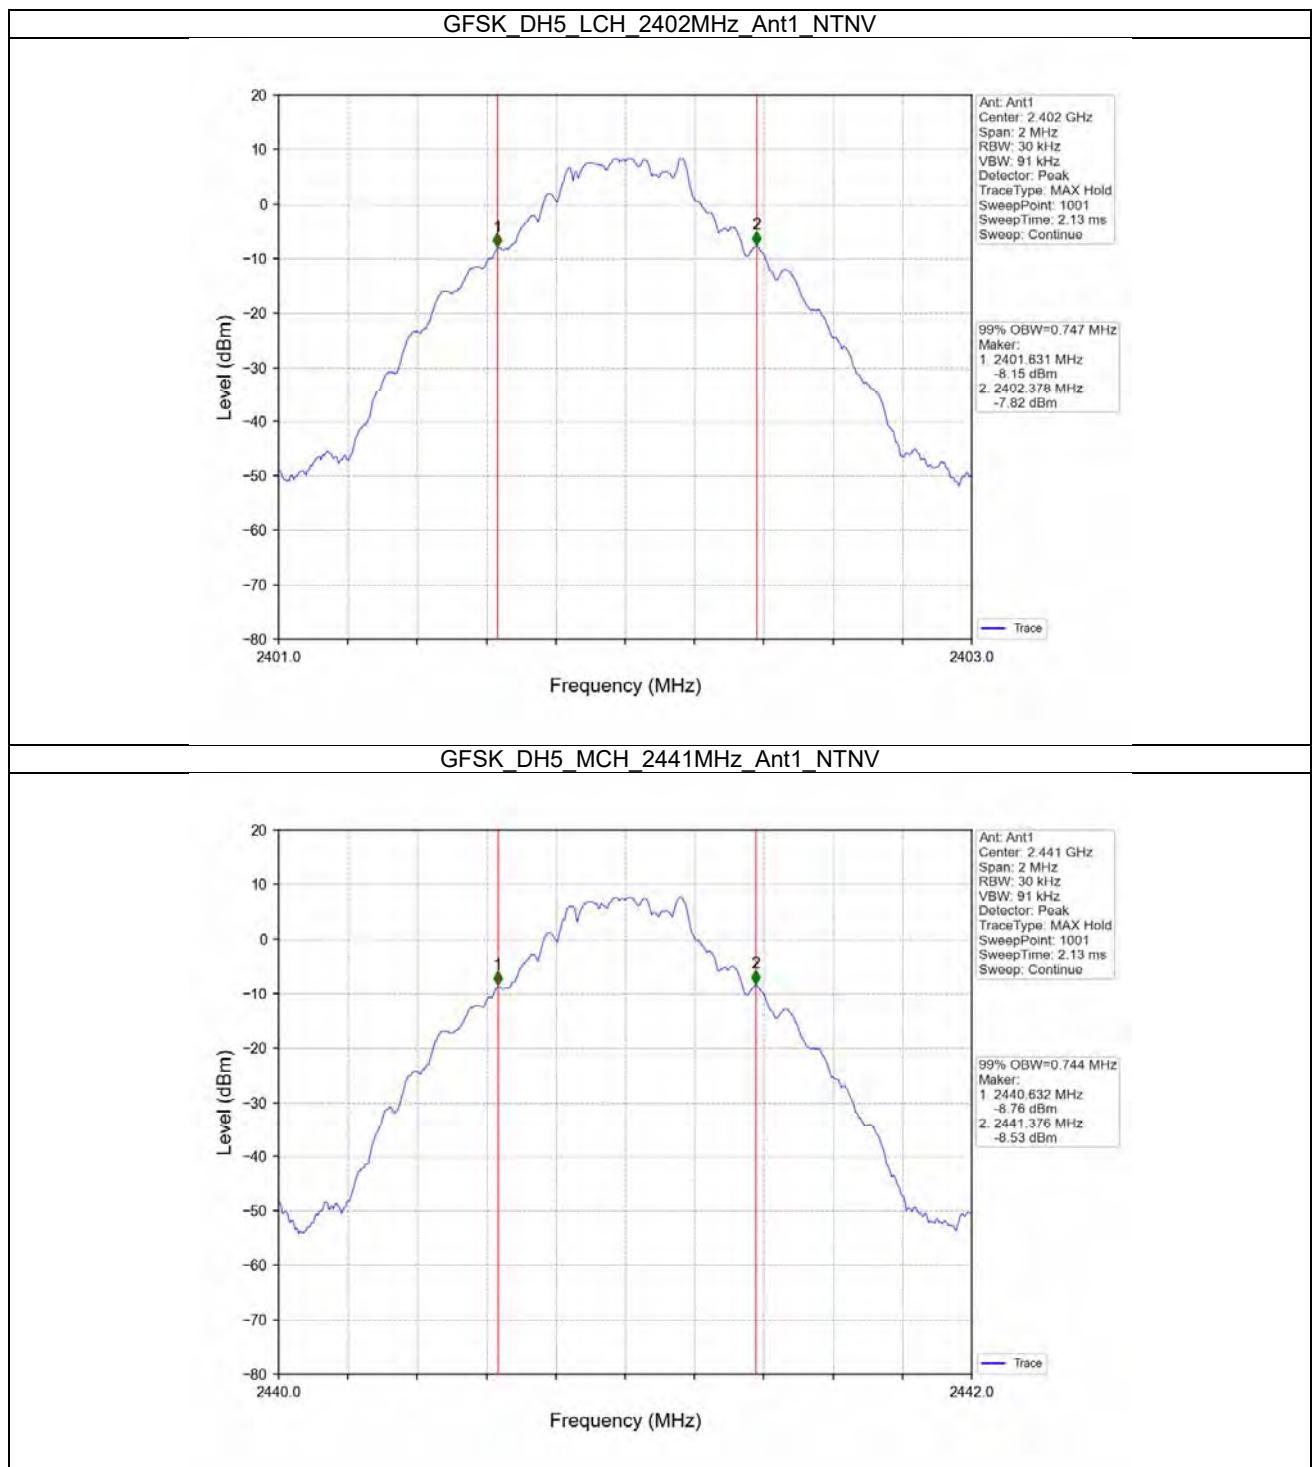




Report No.: W7L-P21100025RF01

GFSK_DH5_HCH_2480MHz_Ant1_NTNV

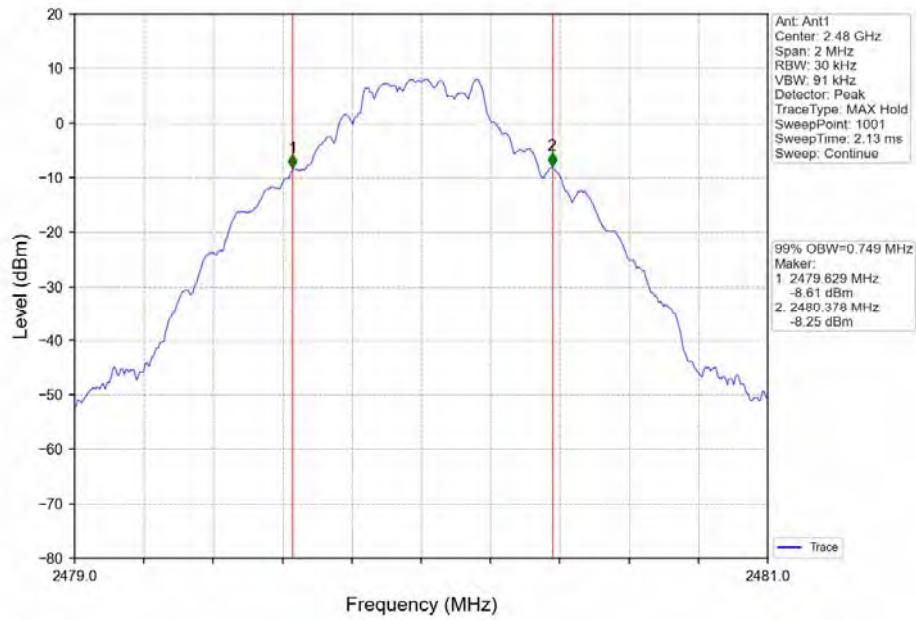


Pi/4DQPSK_2DH5_LCH_2402MHz_Ant1_NTNV

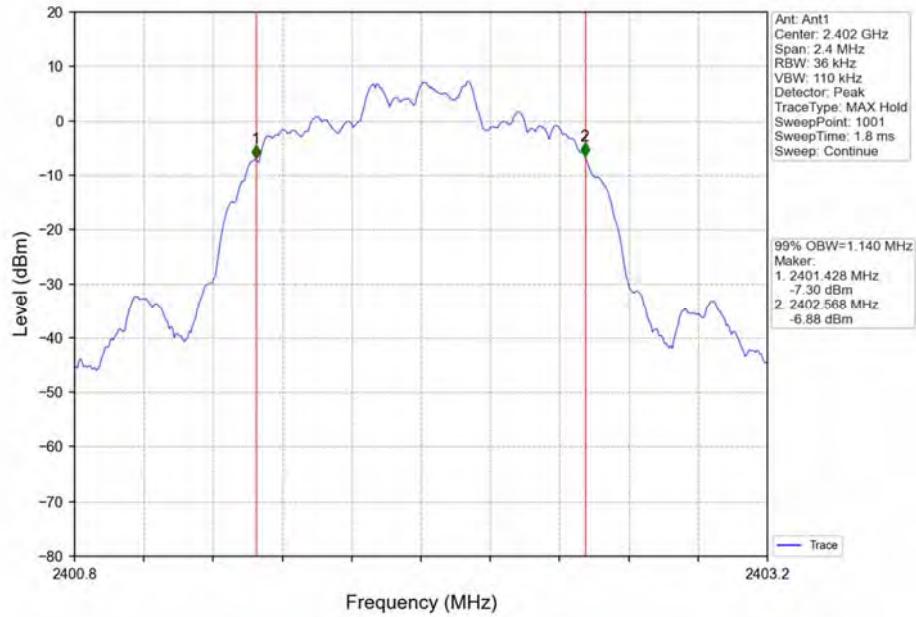




Report No.: W7L-P21100025RF01

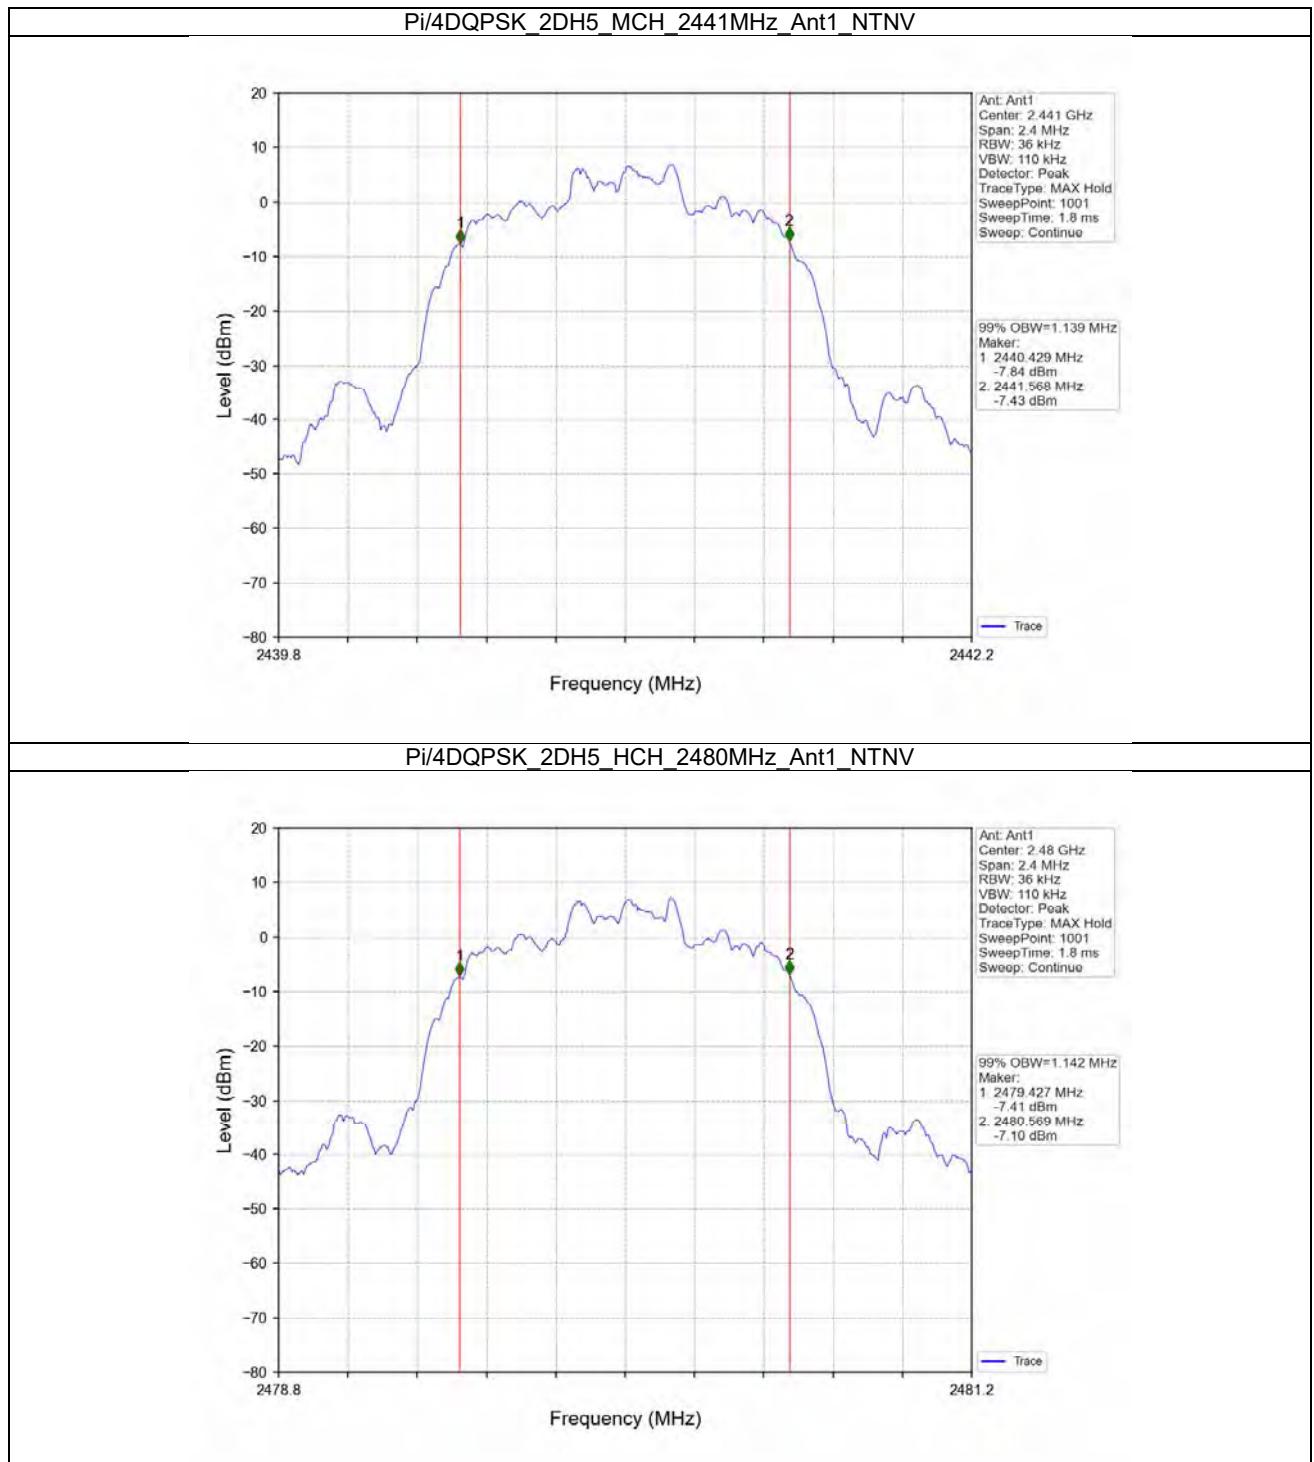




Report No.: W7L-P21100025RF01

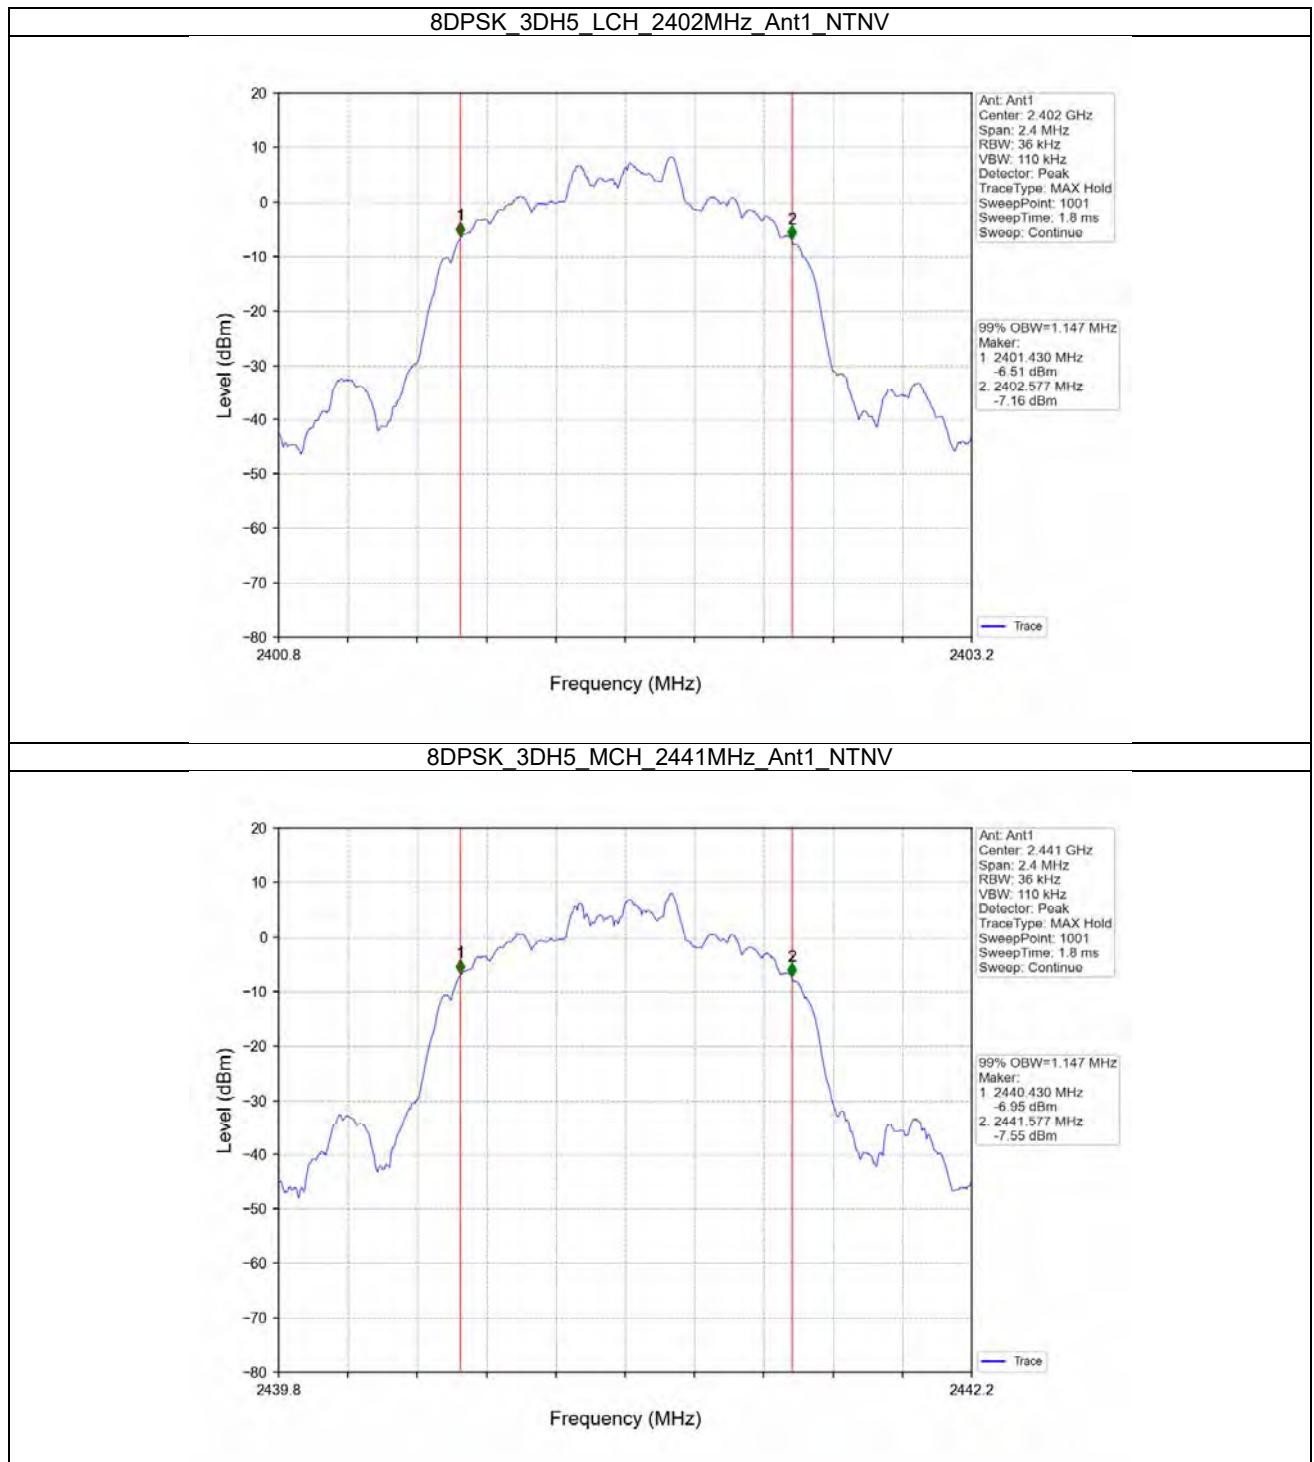



Report No.: W7L-P21100025RF01

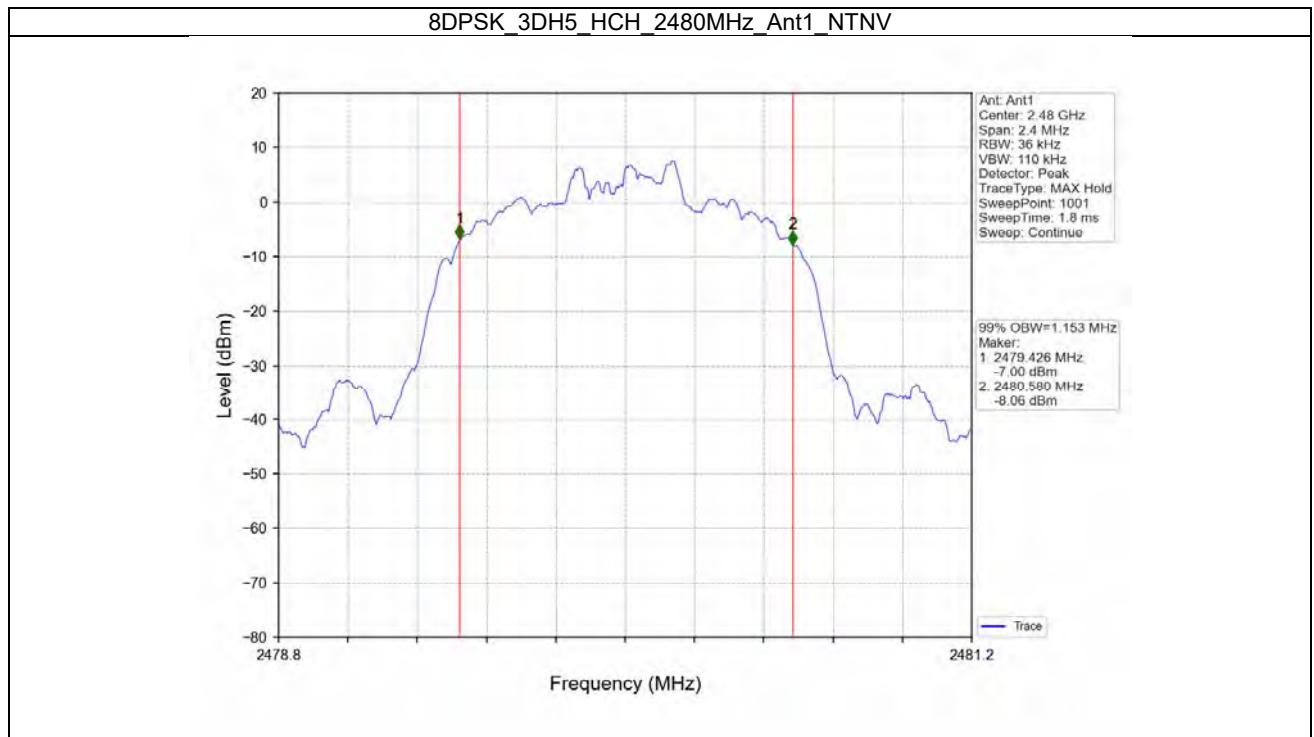




Report No.: W7L-P21100025RF01

20dB BW

Test Result


Mode	TX Type	Frequency (MHz)	Packet Type	Ant	20dB Bandwidth (MHz)		Verdict
					Result		
GFSK	SISO	2402	DH5	1	0.851		Pass
		2441	DH5	1	0.846		Pass
		2480	DH5	1	0.848		Pass
Pi/4DQPSK	SISO	2402	2DH5	1	1.279		Pass
		2441	2DH5	1	1.273		Pass
		2480	2DH5	1	1.276		Pass
8DPSK	SISO	2402	3DH5	1	1.280		Pass
		2441	3DH5	1	1.279		Pass
		2480	3DH5	1	1.291		Pass

Test Graph

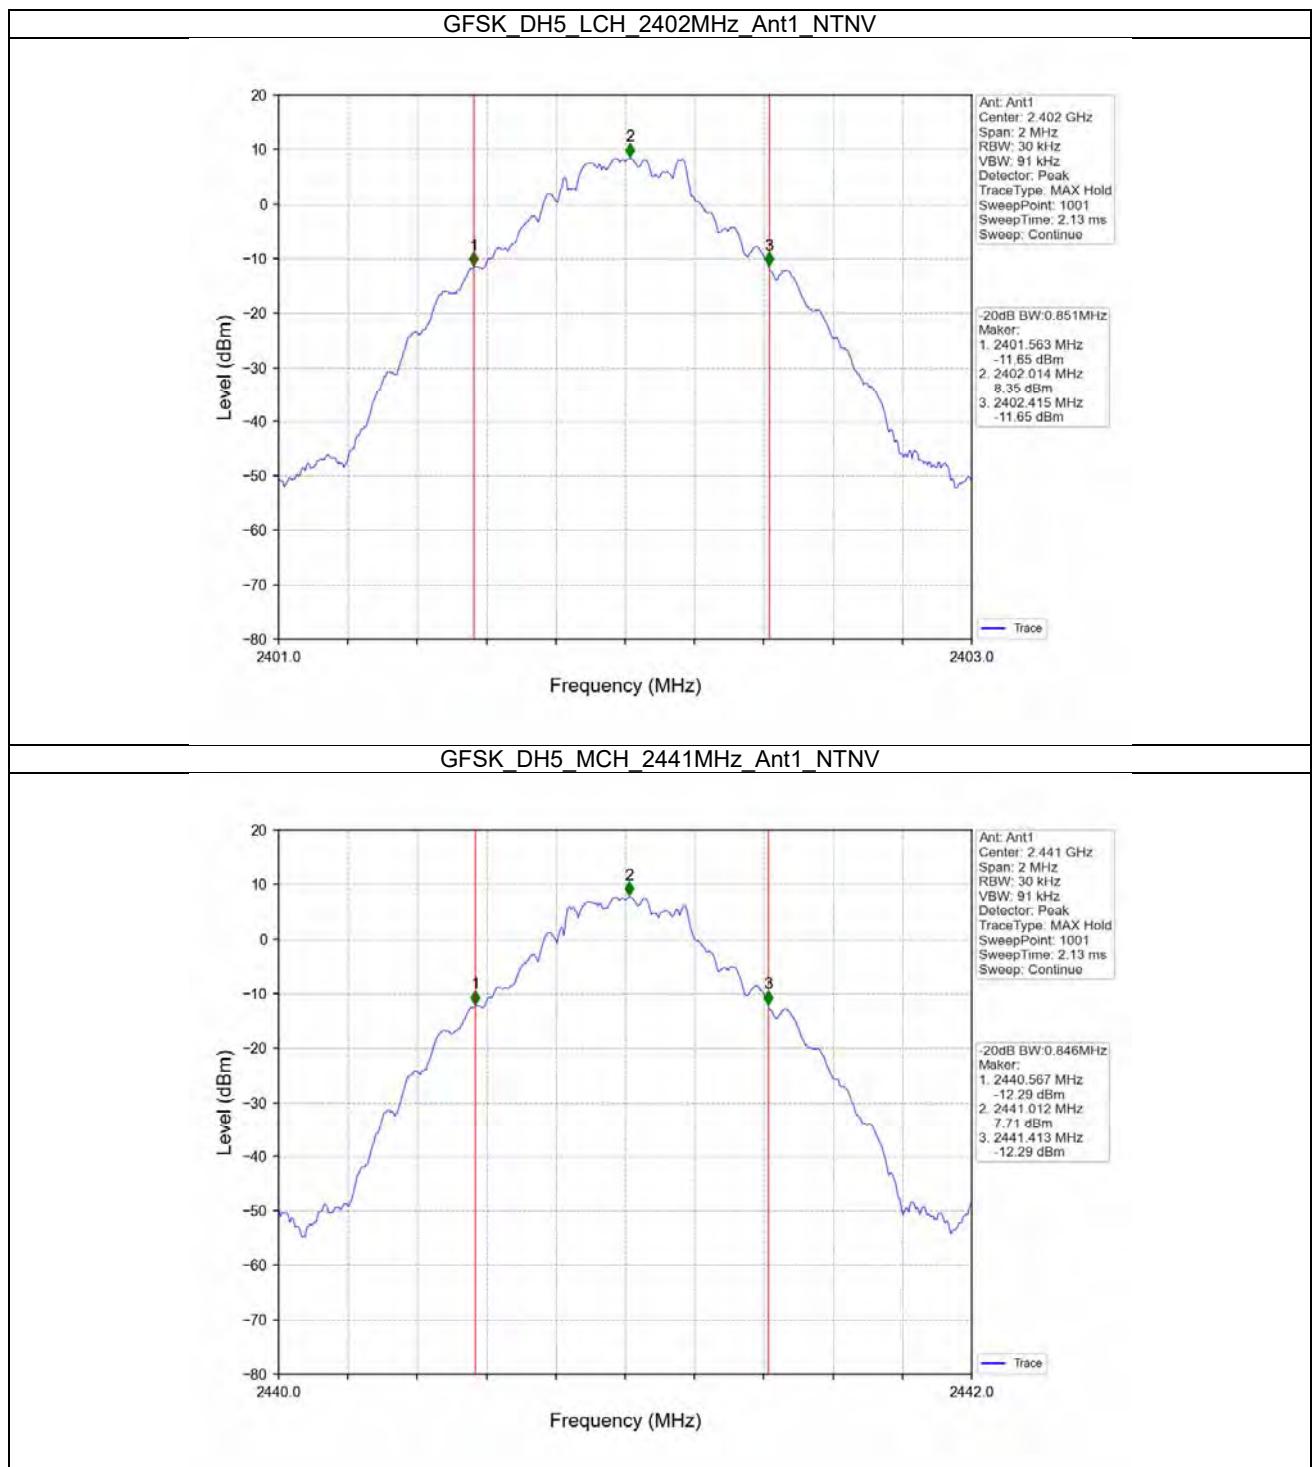




Report No.: W7L-P21100025RF01

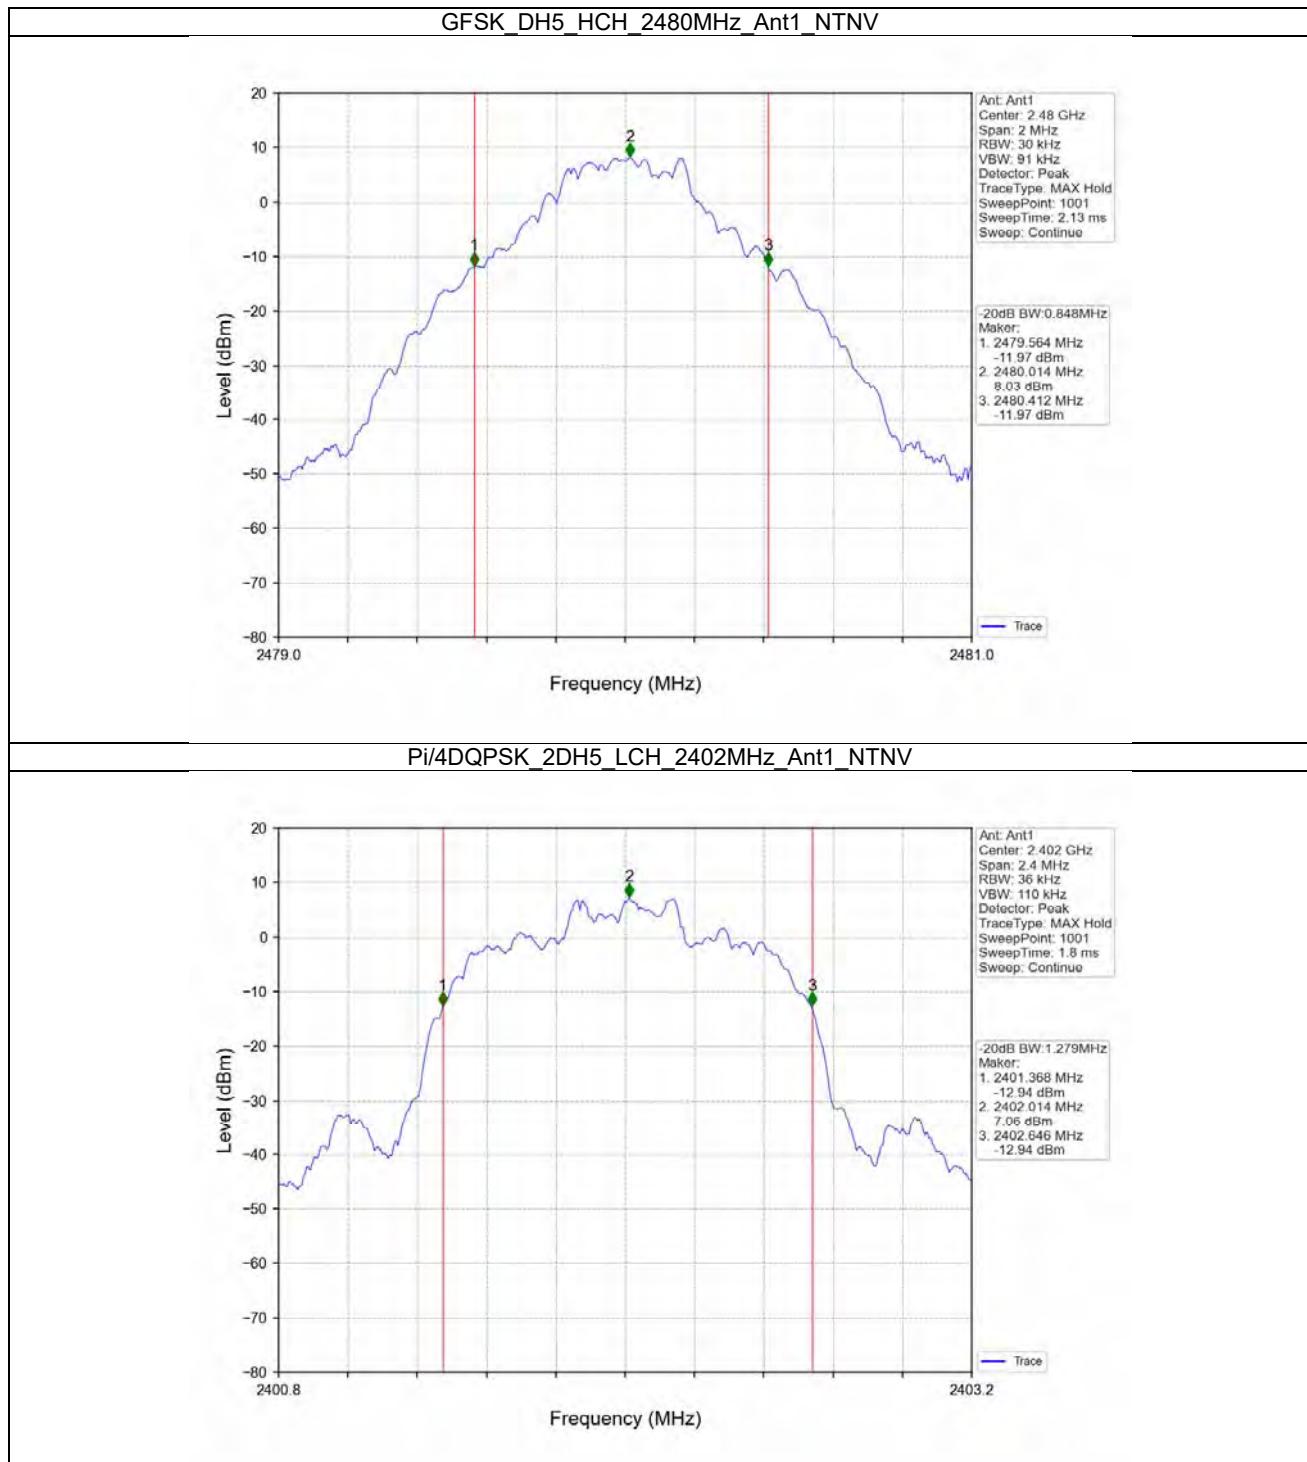




Report No.: W7L-P21100025RF01

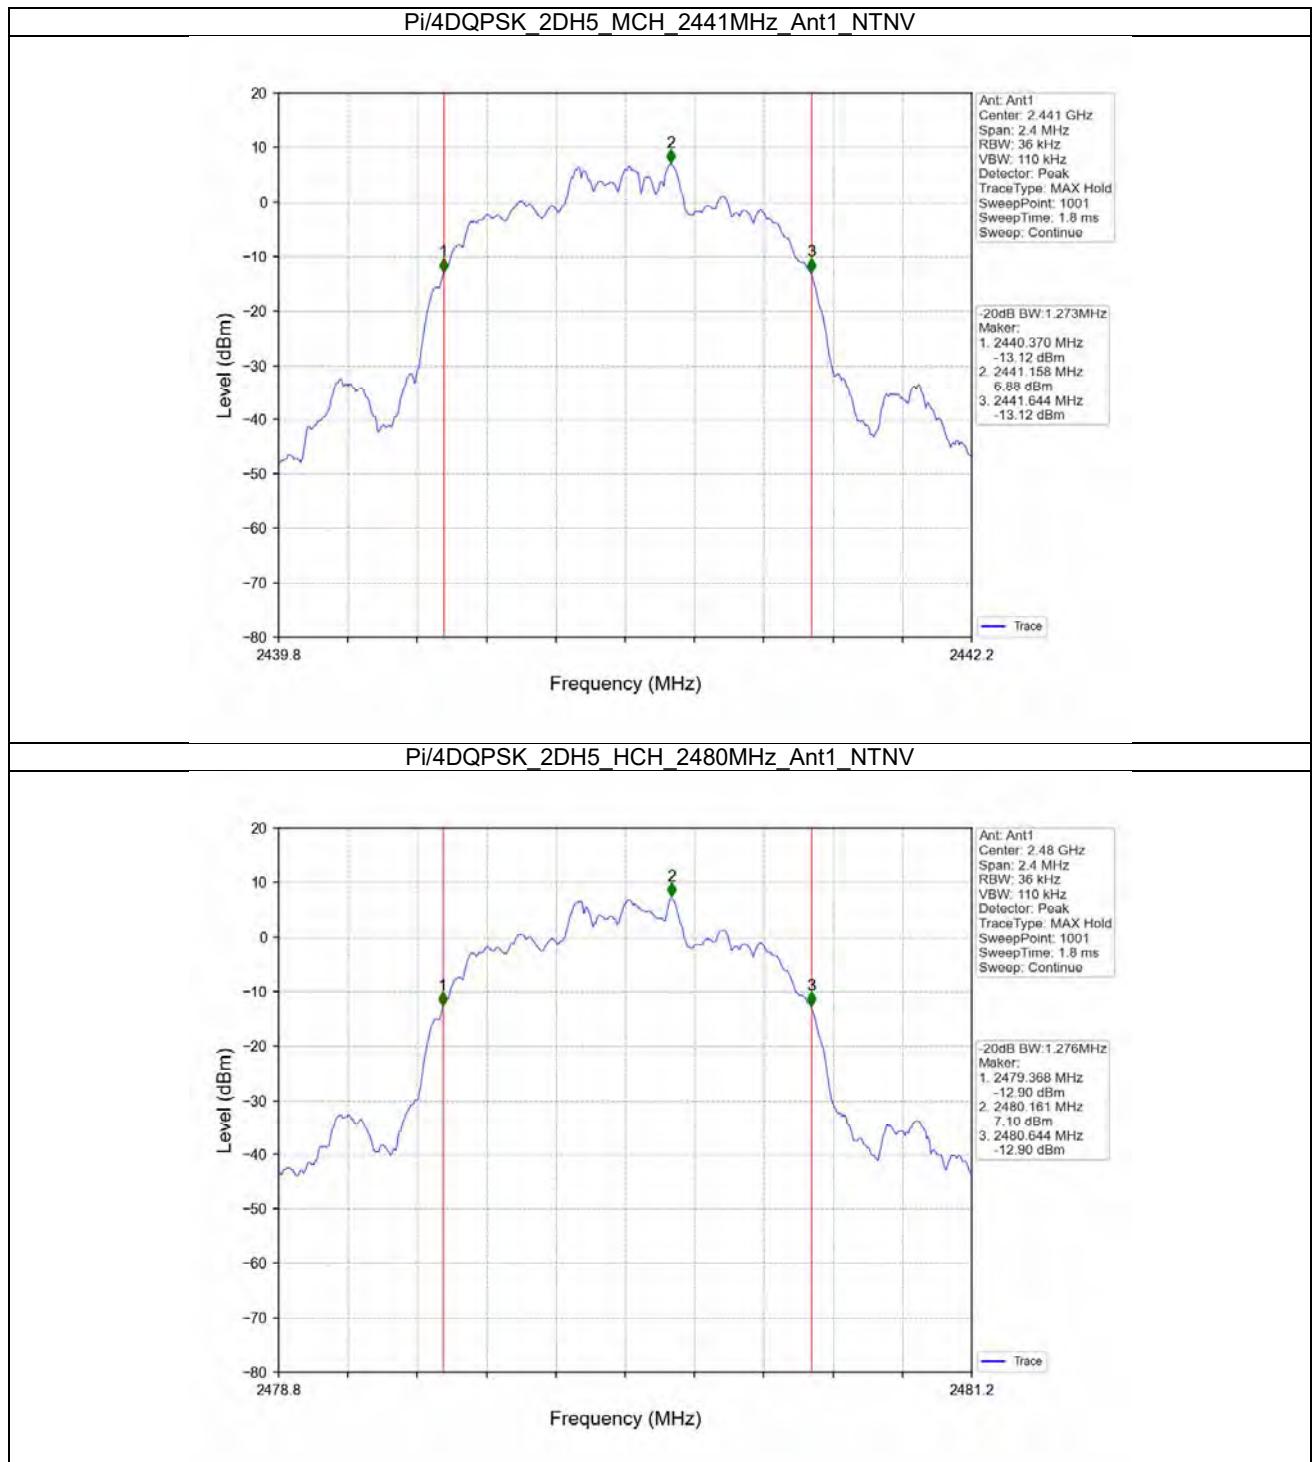




Report No.: W7L-P21100025RF01

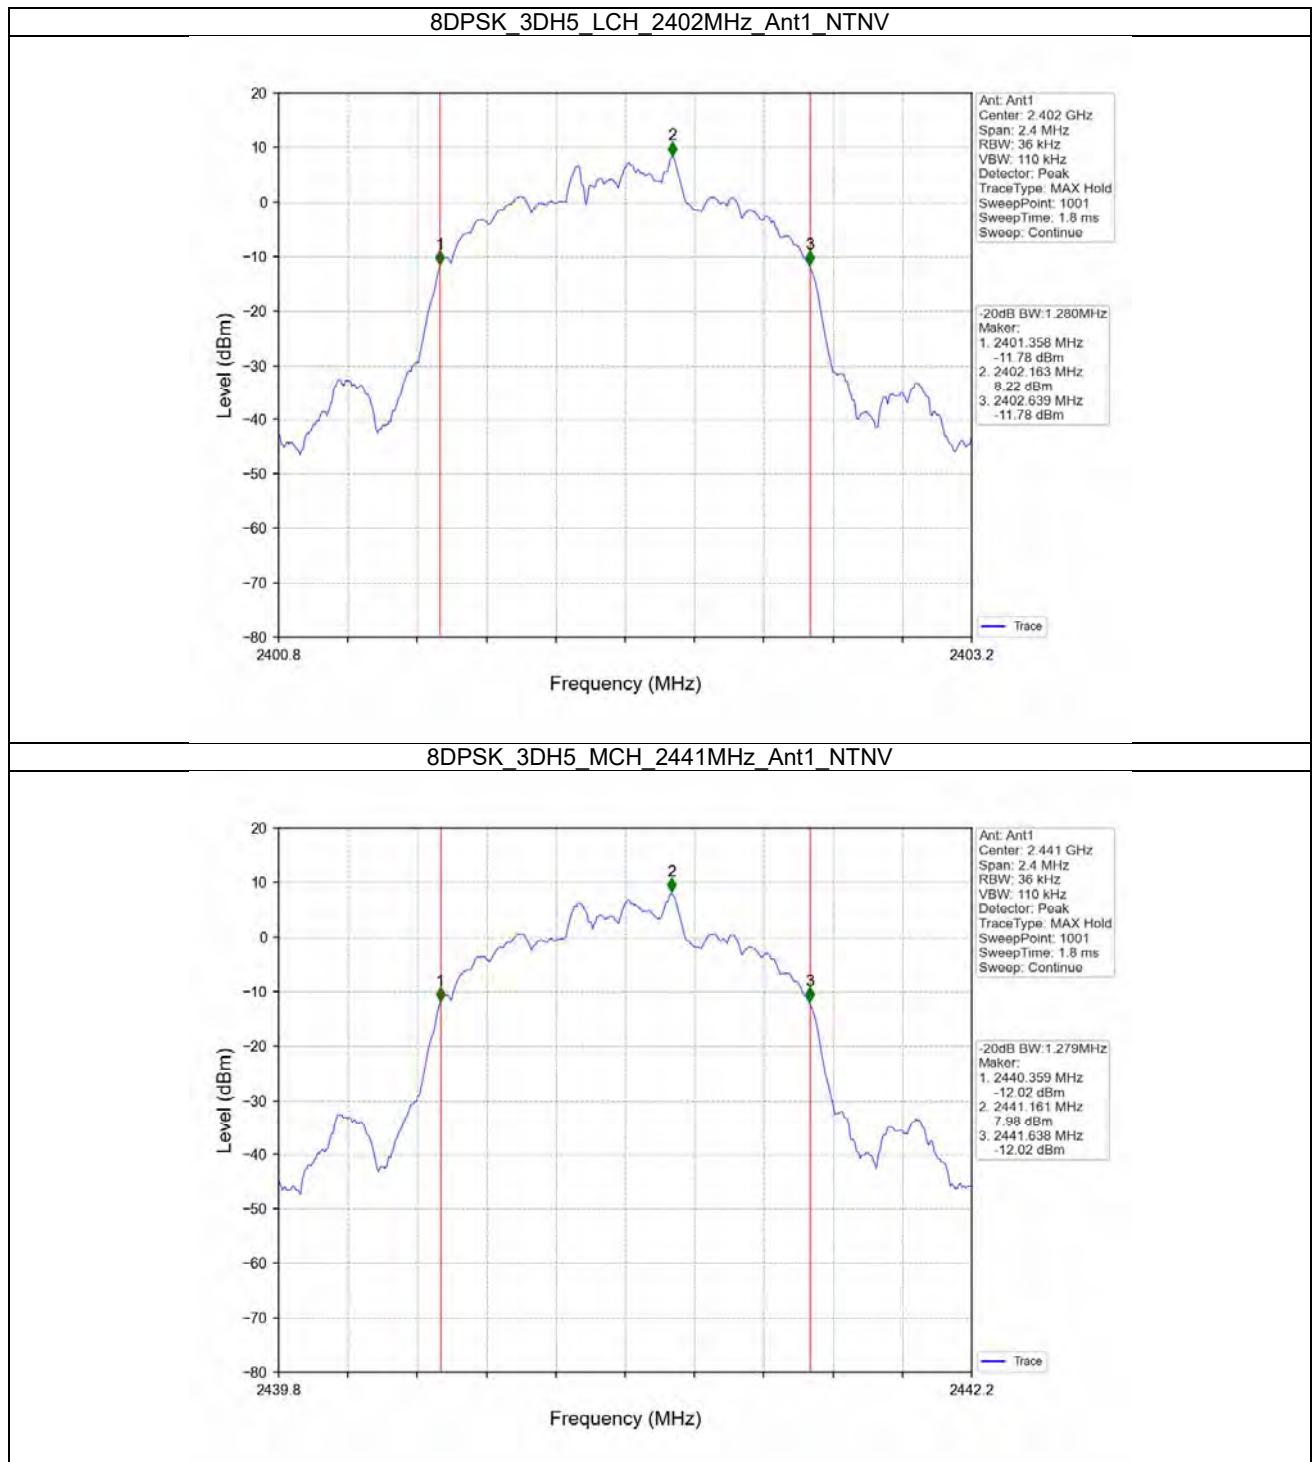



Report No.: W7L-P21100025RF01

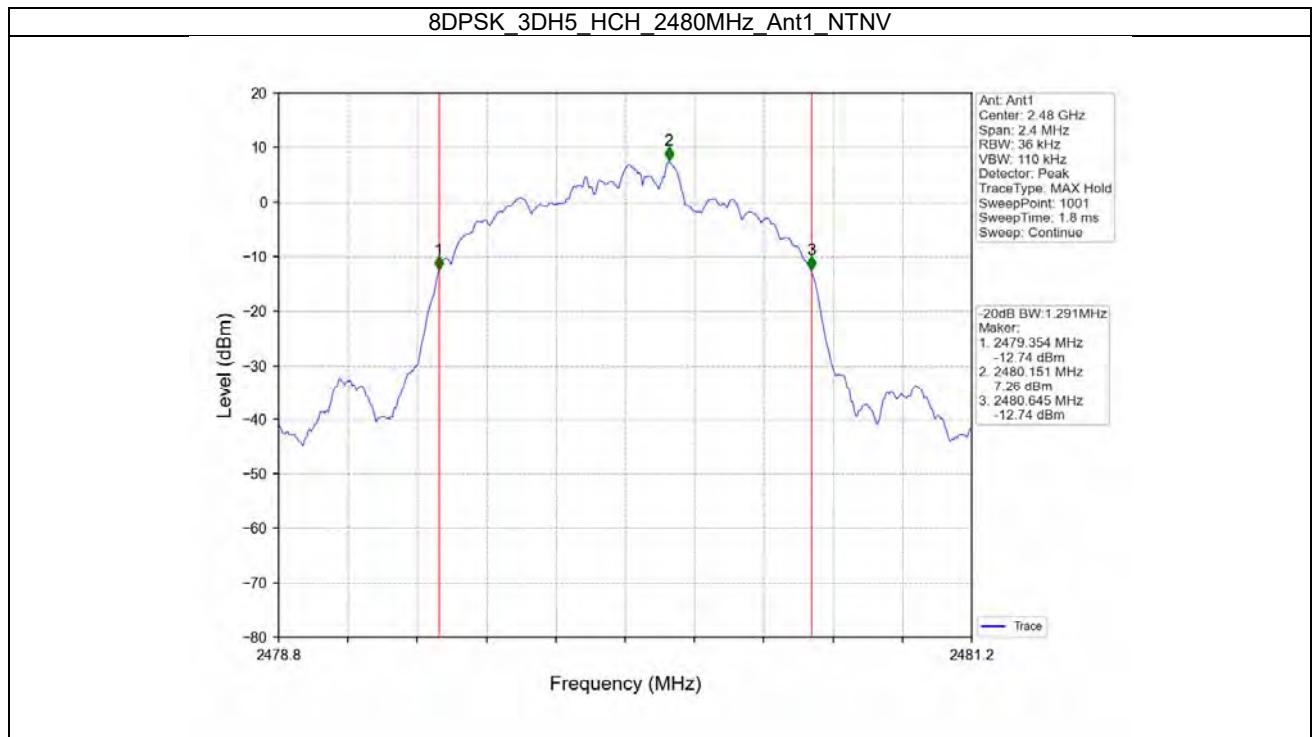



Report No.: W7L-P21100025RF01

Maximum Conducted Output Power

Power

Test Result

Mode	TX Type	Frequency (MHz)	Packet Type	Maximum Peak Conducted Output Power			Verdict	Power setting
				Ant1(dBm)	Ant1(mw)	Limit(mw)		
GFSK	SISO	2402	DH5	10.82	12.08	<= 125	Pass	Defult
		2441	DH5	10.06	10.14	<= 125	Pass	Defult
		2480	DH5	10.47	11.14	<= 125	Pass	Defult
Pi/4DQPSK	SISO	2402	2DH5	10.10	10.23	<= 125	Pass	Defult
		2441	2DH5	9.57	9.06	<= 125	Pass	Defult
		2480	2DH5	9.86	9.68	<= 125	Pass	Defult
8DPSK	SISO	2402	3DH5	10.18	10.42	<= 125	Pass	Defult
		2441	3DH5	9.83	9.62	<= 125	Pass	Defult
		2480	3DH5	9.88	9.73	<= 125	Pass	Defult

Note1: Antenna Gain: Ant1: 2.70dBi;

Mode	TX Type	Frequency (MHz)	Packet Type	Maximum Avg Conducted Output Power			Verdict	Power setting
				Ant1(dBm)	Ant1(mw)	Limit(mw)		
GFSK	SISO	2402	DH5	9.82	/	/	Pass	Defult
		2441	DH5	8.55	/	/	Pass	Defult
		2480	DH5	9.04	/	/	Pass	Defult
Pi/4DQPSK	SISO	2402	2DH5	6.76	/	/	Pass	Defult
		2441	2DH5	5.38	/	/	Pass	Defult
		2480	2DH5	6.12	/	/	Pass	Defult
8DPSK	SISO	2402	3DH5	6.78	/	/	Pass	Defult
		2441	3DH5	5.36	/	/	Pass	Defult
		2480	3DH5	6.09	/	/	Pass	Defult

Note1: Antenna Gain: Ant1: 2.70dBi;



Report No.: W7L-P21100025RF01


Carrier Frequency Separation

Ant1

Test Result


Ant1							
Mode	TX Type	Frequency (MHz)	Packet Type	Channel Separation (MHz)	20dB Bandwidth (MHz)	Limit (MHz)	Verdict
GFSK	SISO	HOPP	DH5	1.017	0.851	>=0.851	Pass
Pi/4DQPSK	SISO	HOPP	2DH5	1.012	1.279	>=0.853	Pass
8DPSK	SISO	HOPP	3DH5	0.990	1.291	>=0.861	Pass

Test Graph

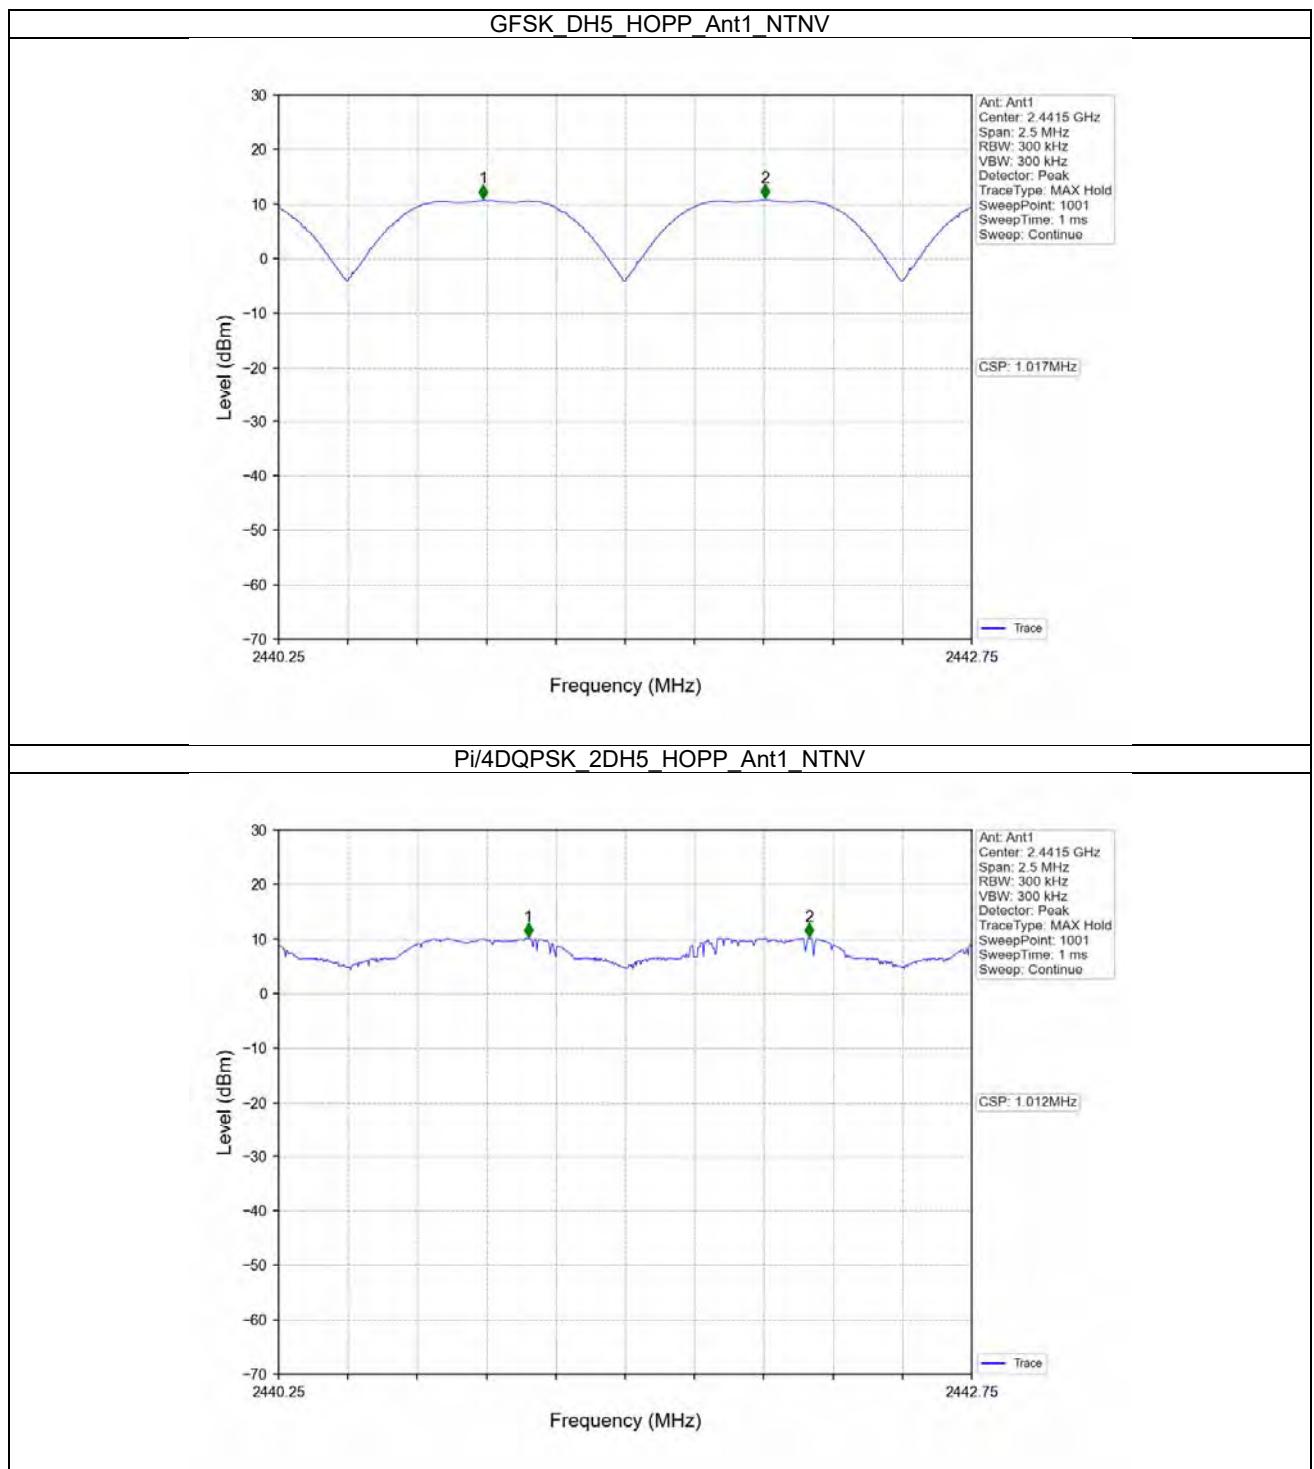



Report No.: W7L-P21100025RF01

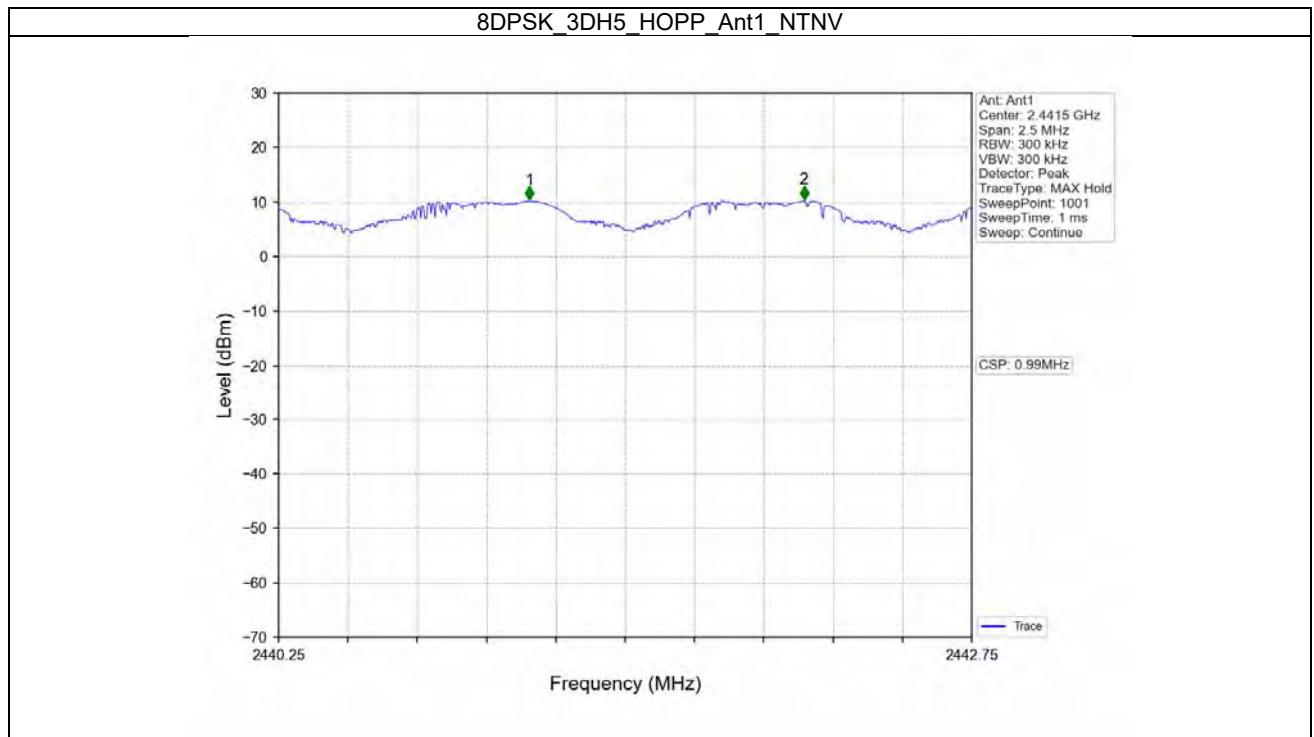



Report No.: W7L-P21100025RF01

Number of Hopping Frequencies

HoppNum


Test Result

Mode	TX Type	Frequency (MHz)	Packet Type	Num of Hopping Frequencies		Verdict
				Ant1	Limit	
GFSK	SISO	HOPP	DH5	79	>=15	Pass
Pi/4DQPSK	SISO	HOPP	2DH5	79	>=15	Pass
8DPSK	SISO	HOPP	3DH5	79	>=15	Pass




Report No.: W7L-P21100025RF01

Test Graph

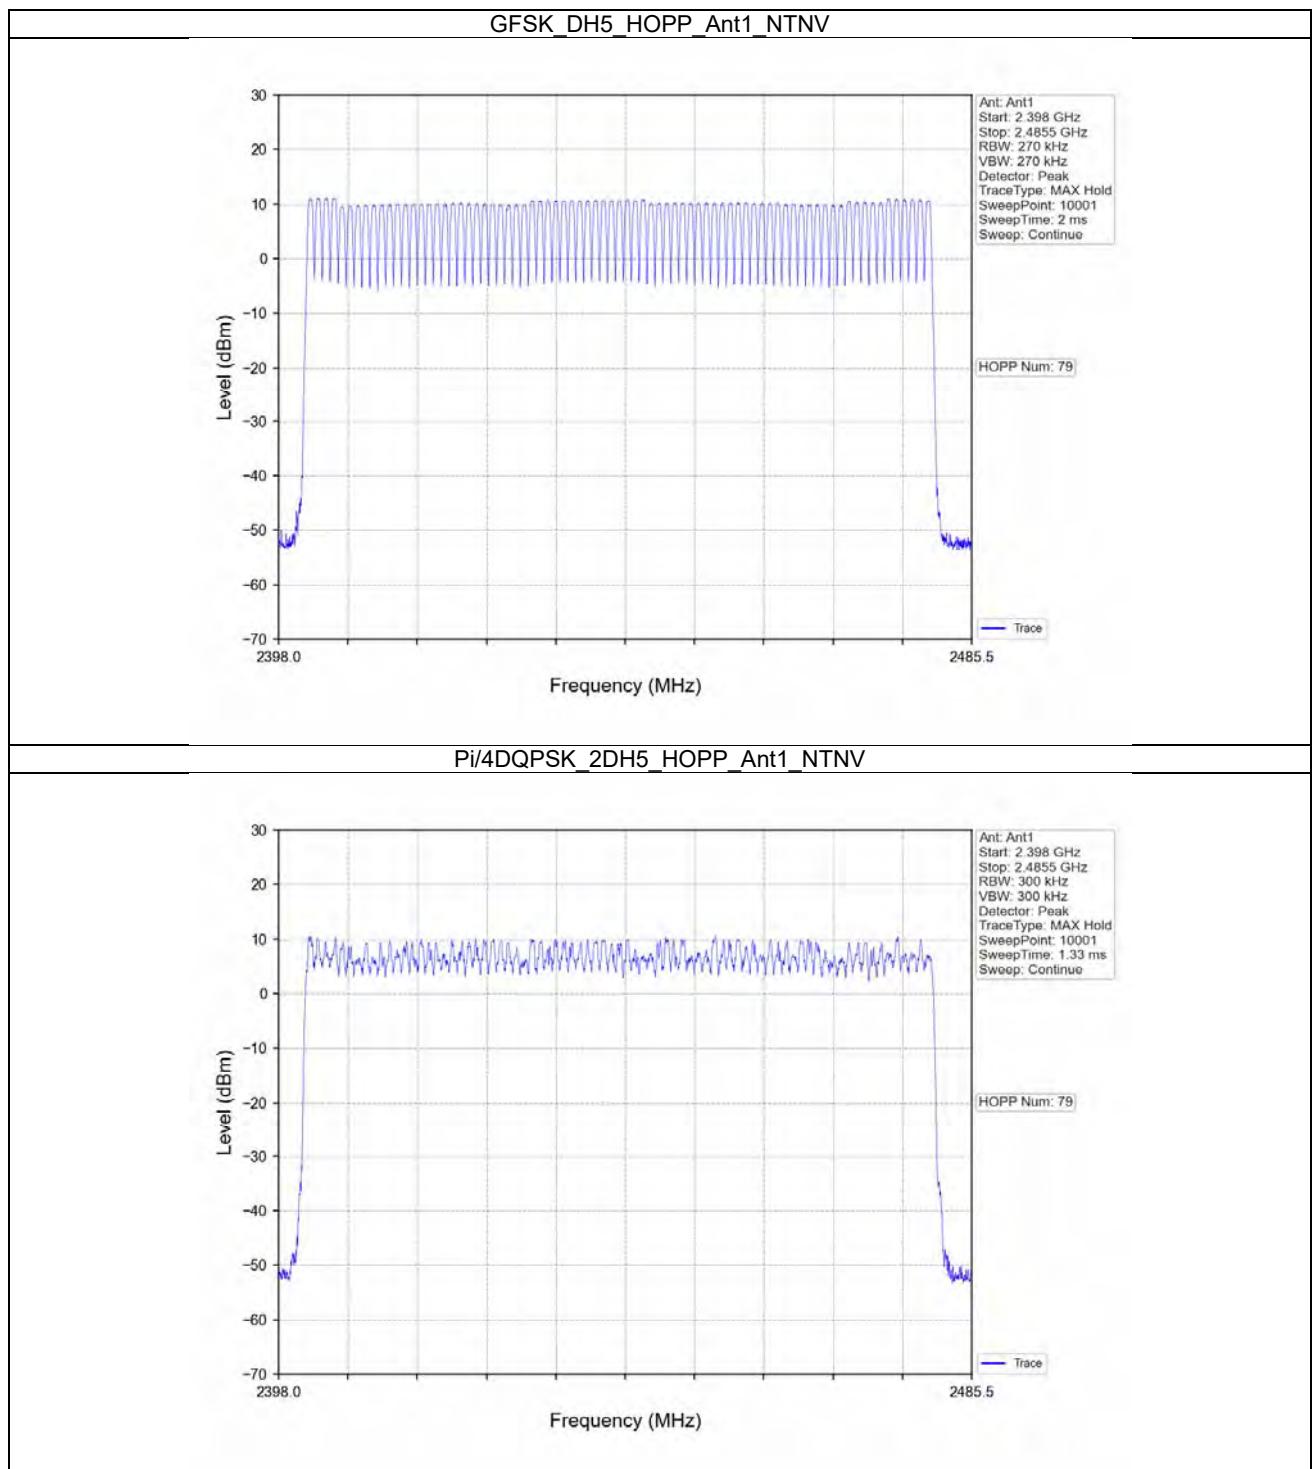



Report No.: W7L-P21100025RF01

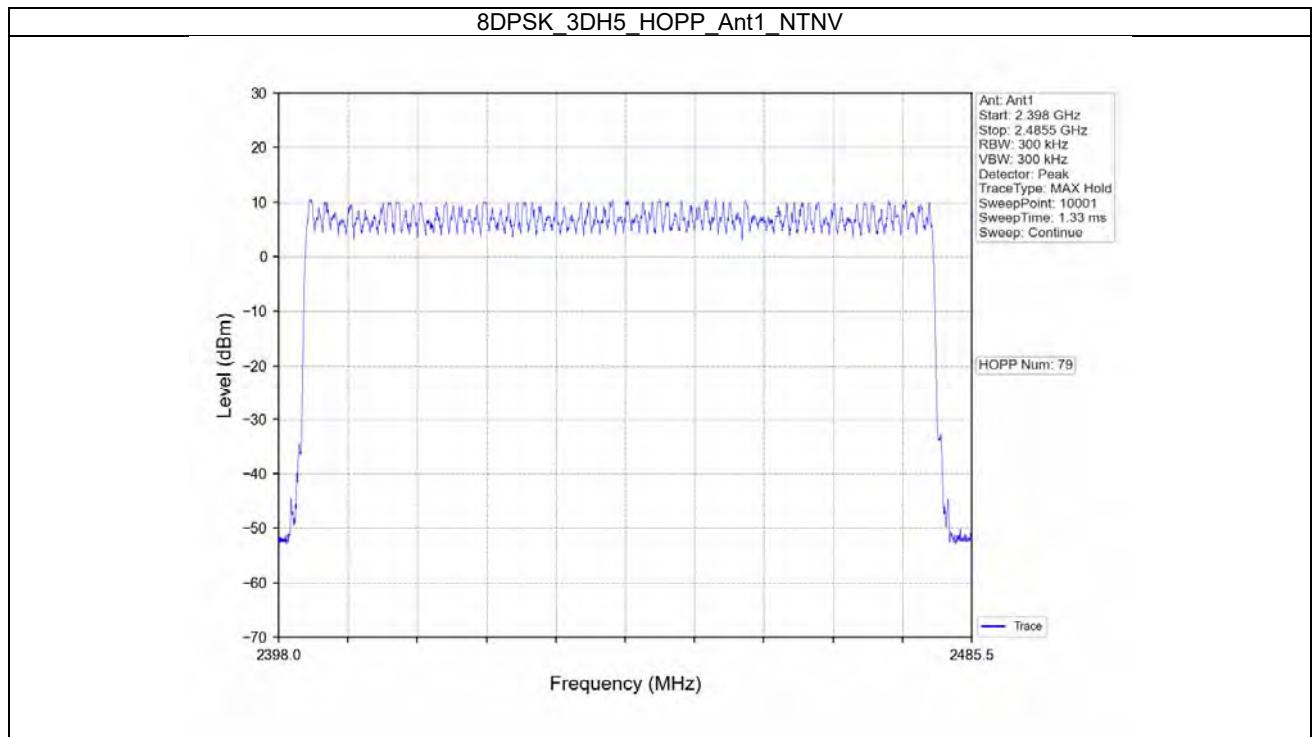



Time of Occupancy (Dwell Time)

Ant1


Test Result

Ant1										
Mode	TX Type	Frequency (MHz)	Packet Type	Duration of Single Pulse (ms)	Observation Period (s)	Num of Pulse in Observation Period	Dwell Time (ms)	Limit (ms)	Verdict	
GFSK	SISO	HOPP	DH1	0.378	31.600	320	120.960	<=400	Pass	
			DH3	1.634	31.600	158	258.172	<=400	Pass	
			DH5	2.882	31.600	116	334.312	<=400	Pass	
Pi/4DQPSK	SISO	HOPP	2DH1	0.386	31.600	422	162.892	<=400	Pass	
			2DH3	1.636	31.600	159	260.124	<=400	Pass	
			2DH5	2.886	31.600	112	323.232	<=400	Pass	
8DPSK	SISO	HOPP	3DH1	0.388	31.600	320	124.160	<=400	Pass	
			3DH3	1.636	31.600	161	263.396	<=400	Pass	
			3DH5	2.888	31.600	110	317.680	<=400	Pass	




Report No.: W7L-P21100025RF01

Test Graph

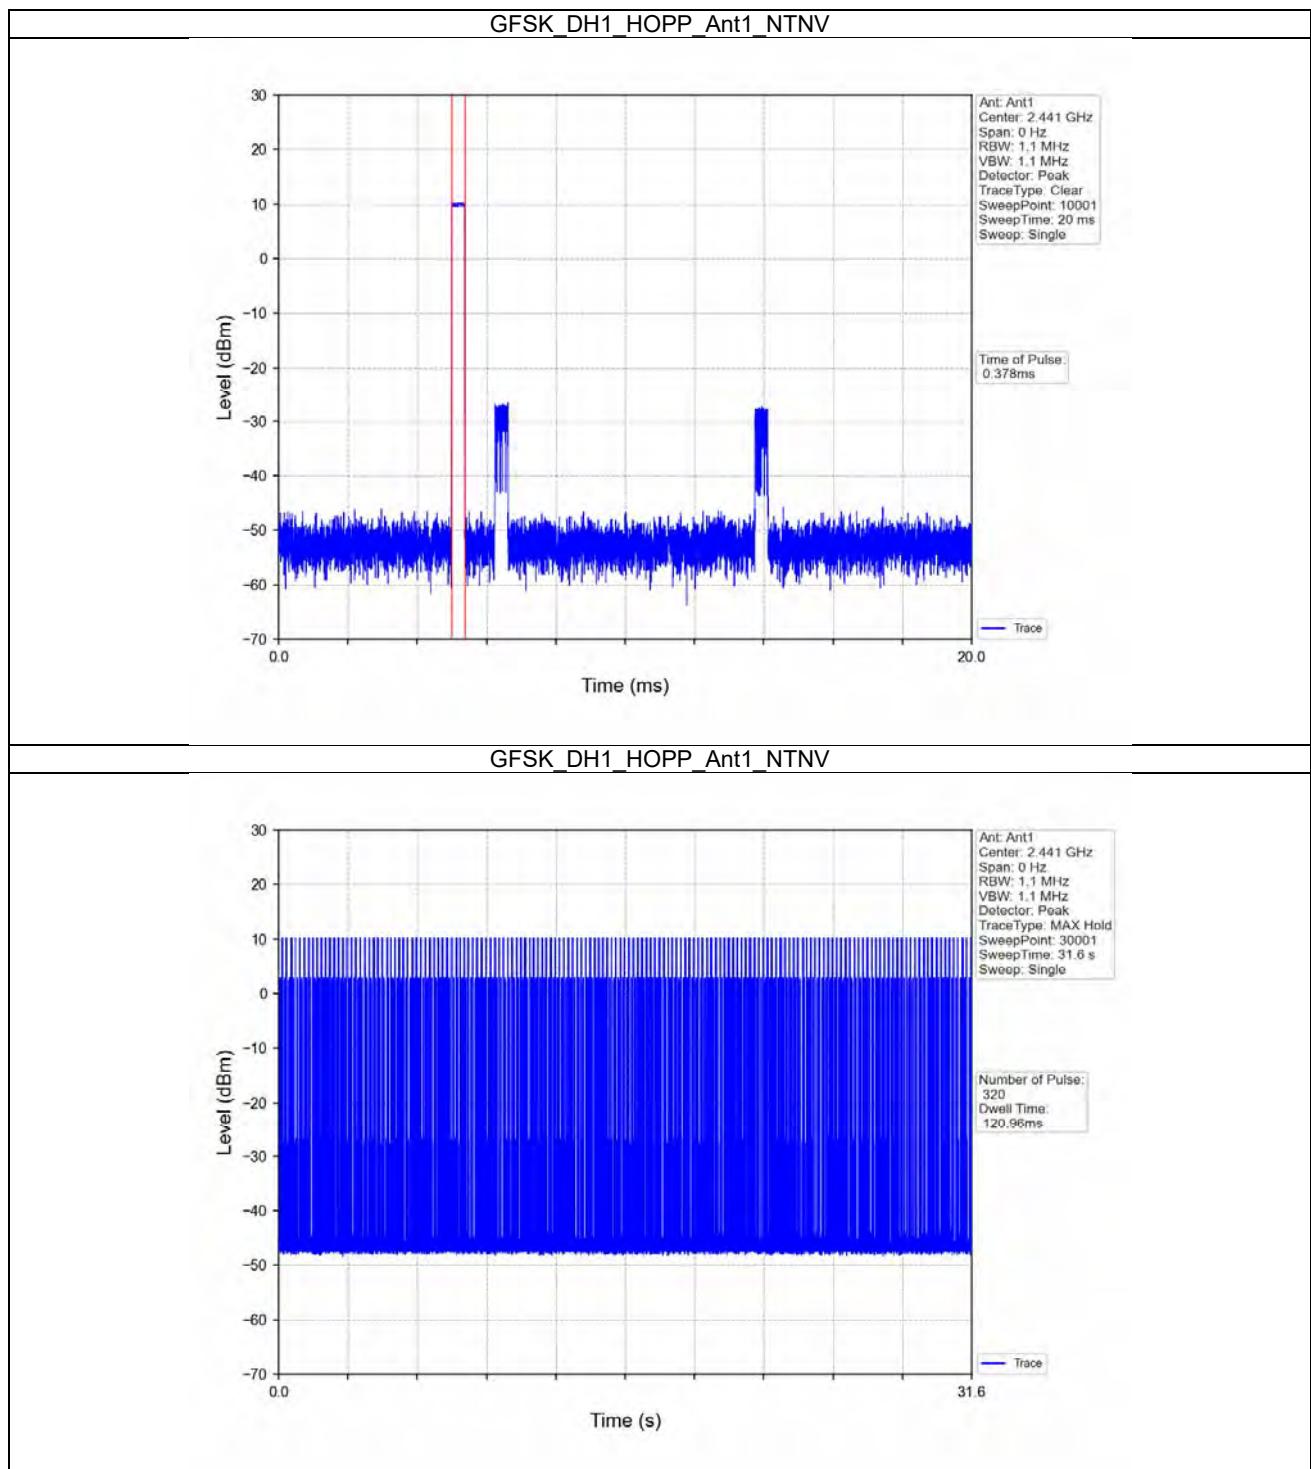




Report No.: W7L-P21100025RF01

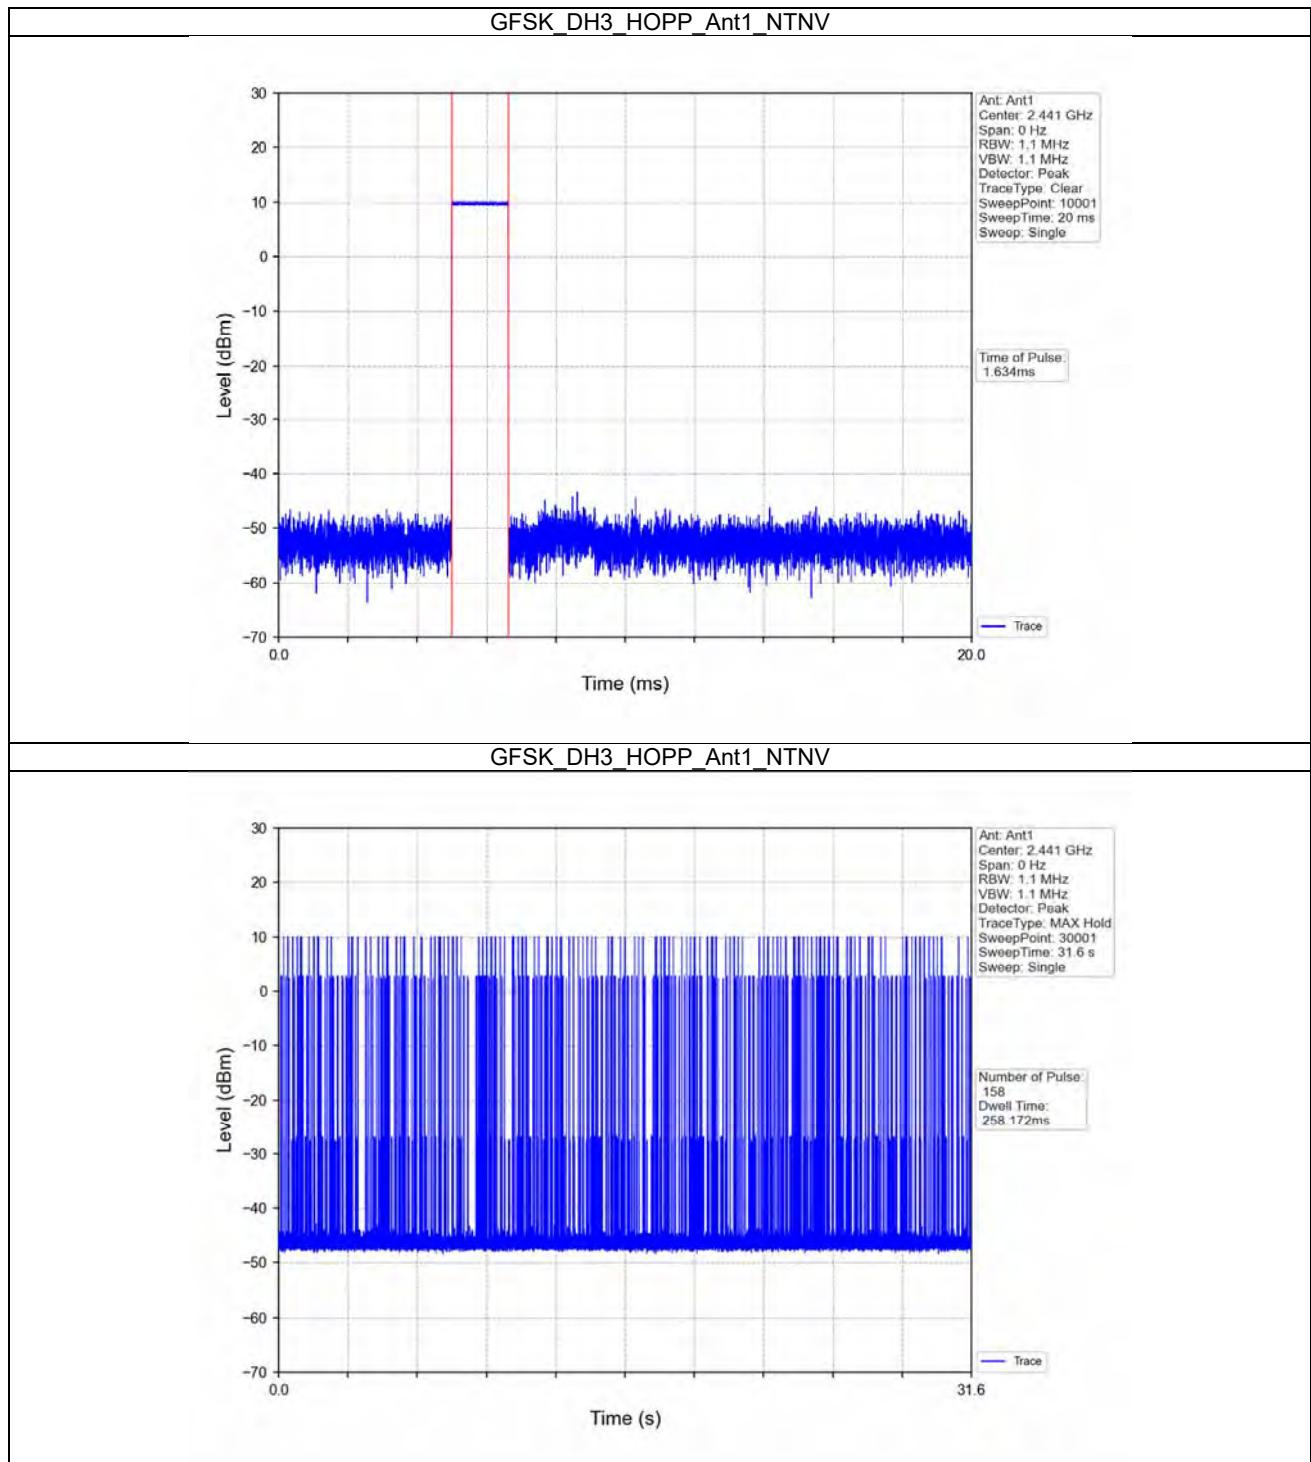




Report No.: W7L-P21100025RF01

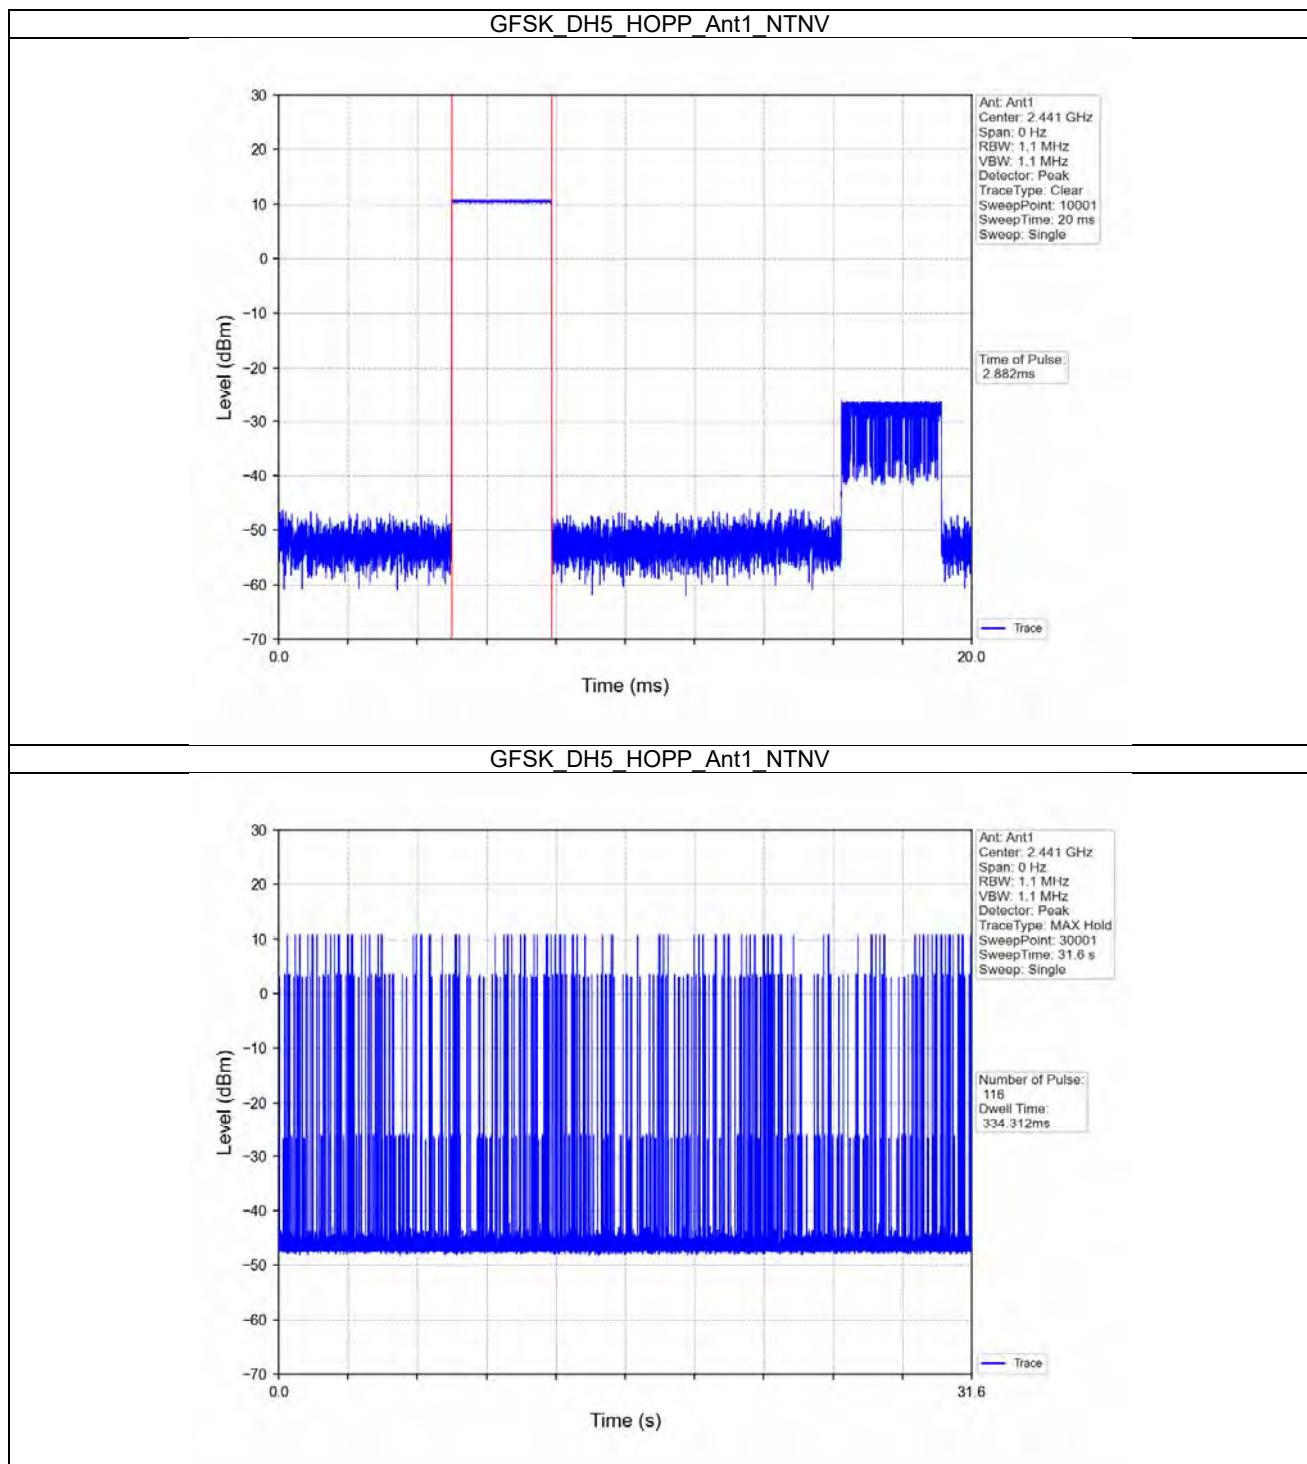




Report No.: W7L-P21100025RF01

Pi/4DQPSK_2DH1_HOPP_Ant1_NTNV

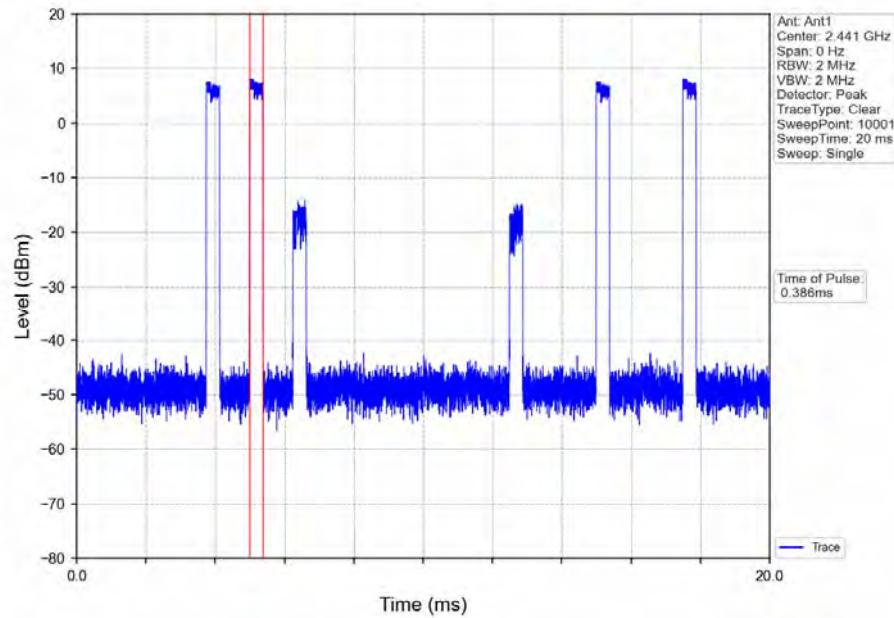


Pi/4DQPSK_2DH1_HOPP_Ant1_NTNV

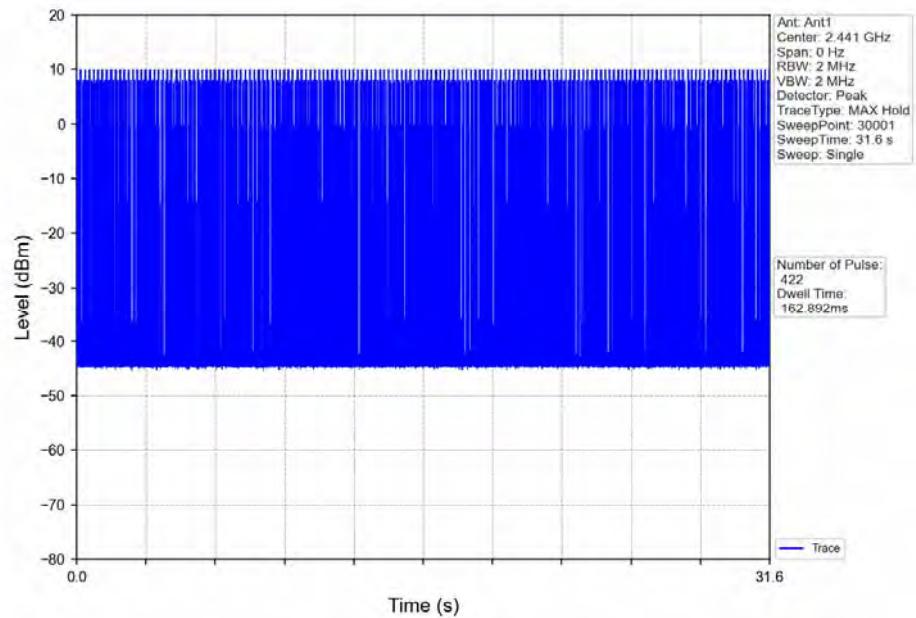




Report No.: W7L-P21100025RF01

Pi/4DQPSK_2DH3_HOPP_Ant1_NTNV

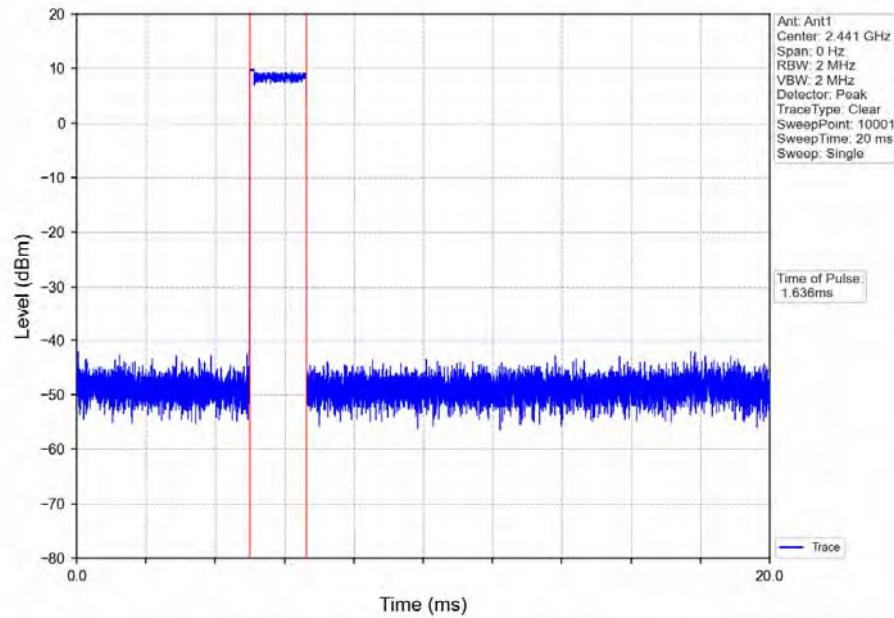


Pi/4DQPSK_2DH3_HOPP_Ant1_NTNV

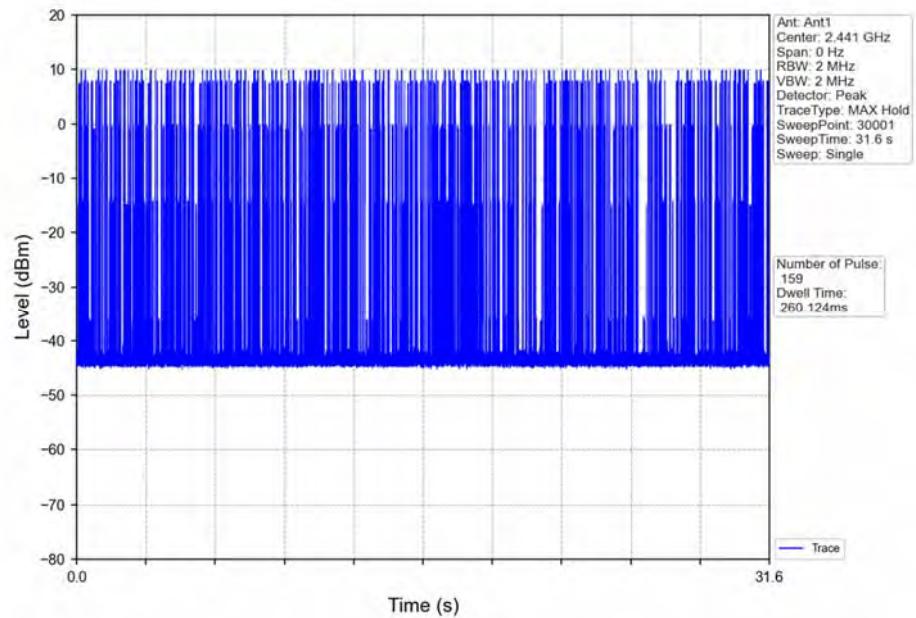




Report No.: W7L-P21100025RF01

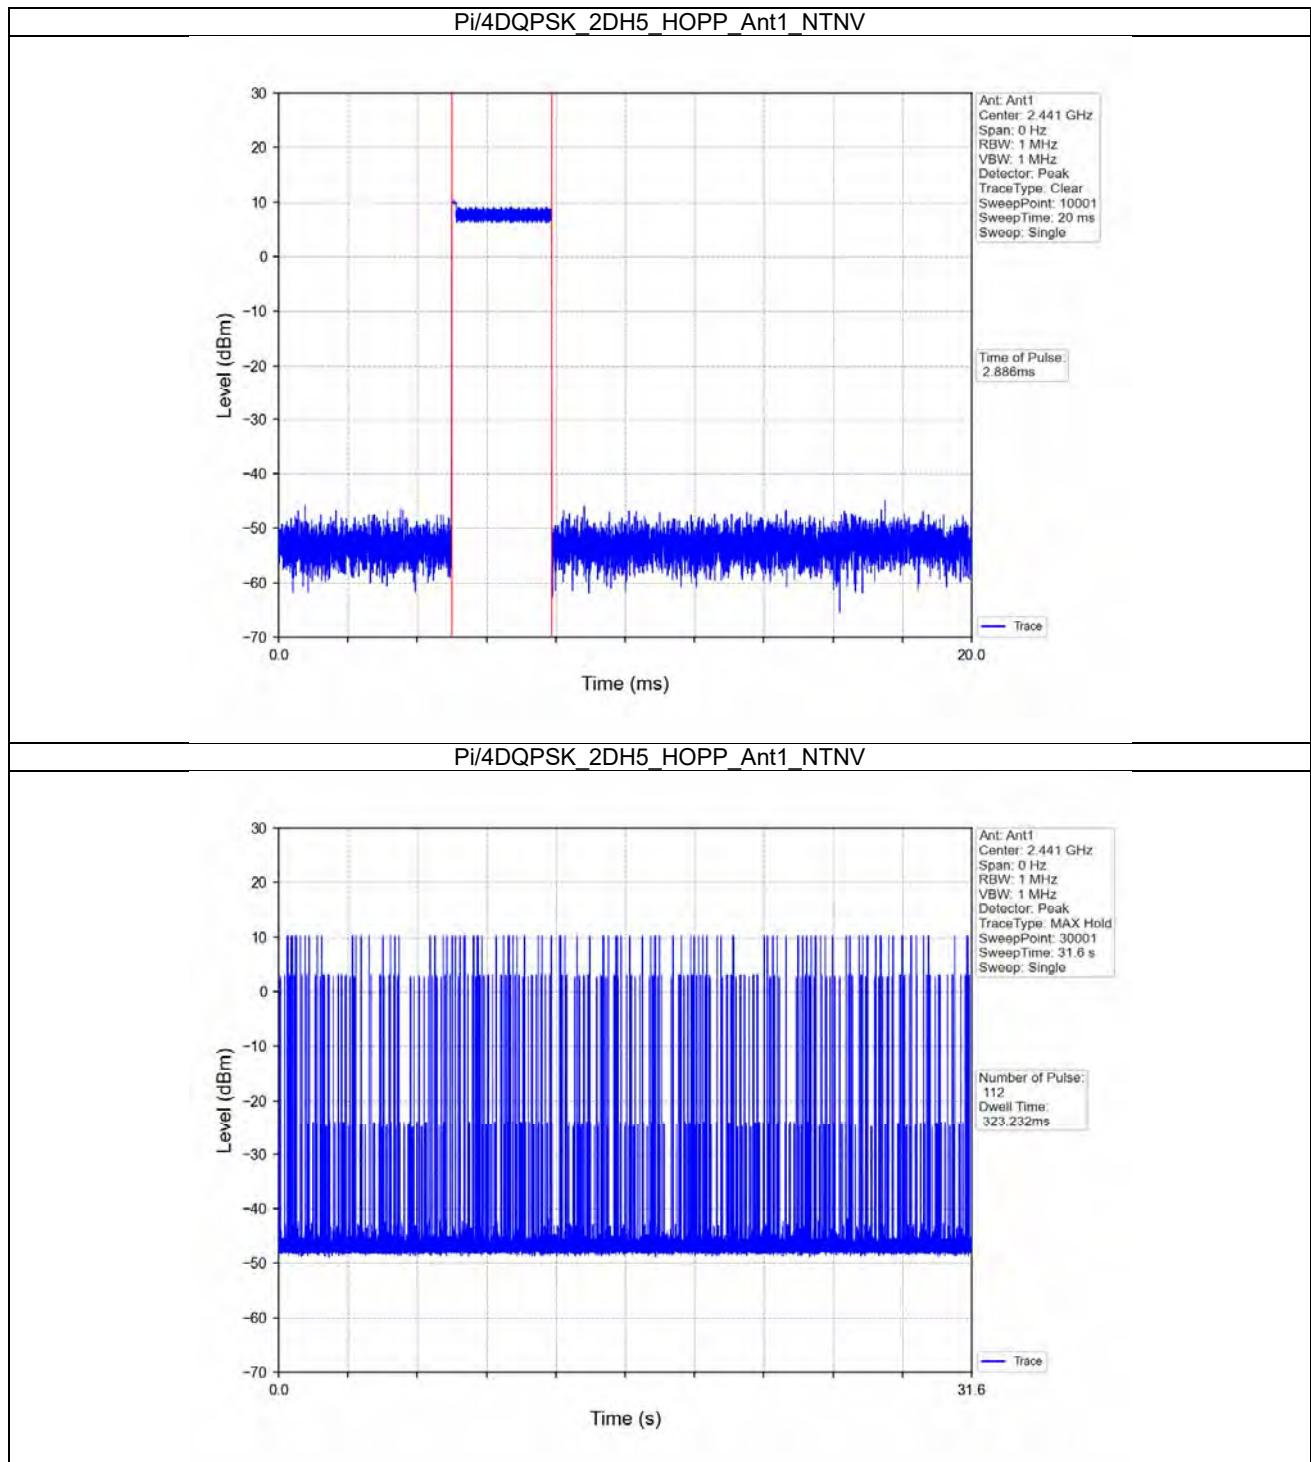




Report No.: W7L-P21100025RF01

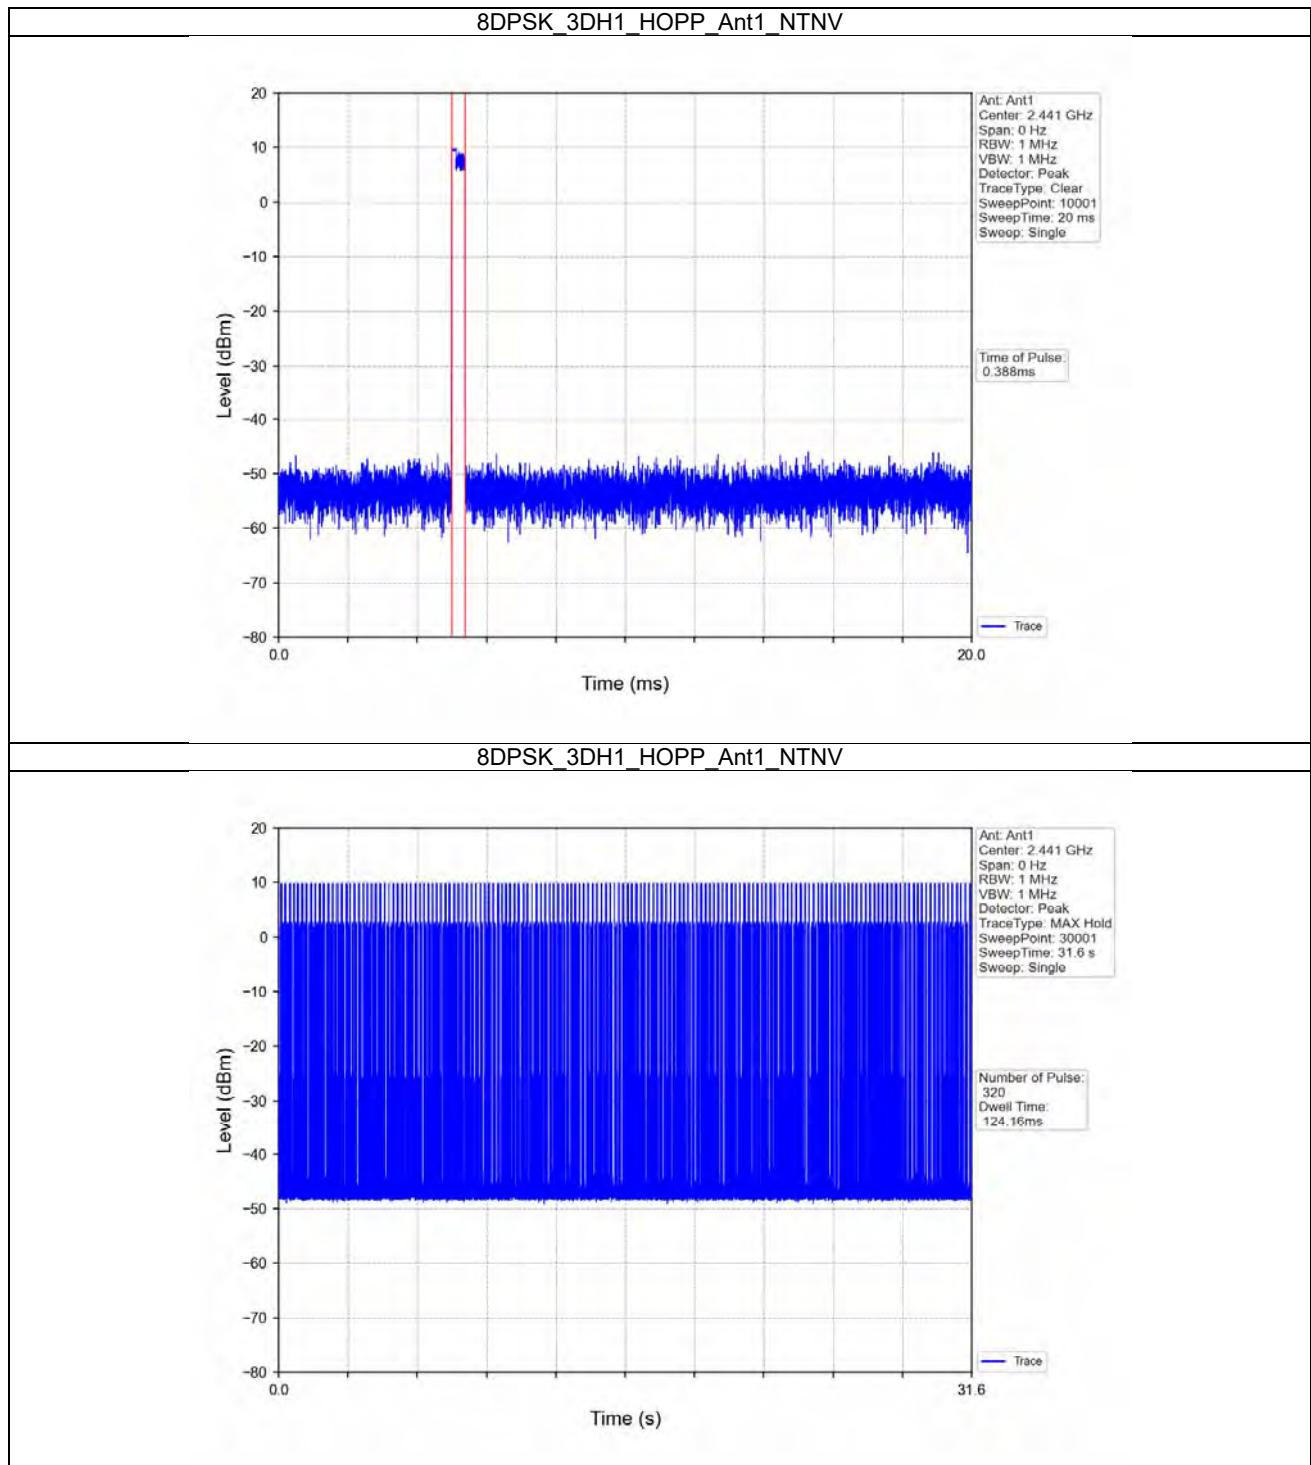




Report No.: W7L-P21100025RF01

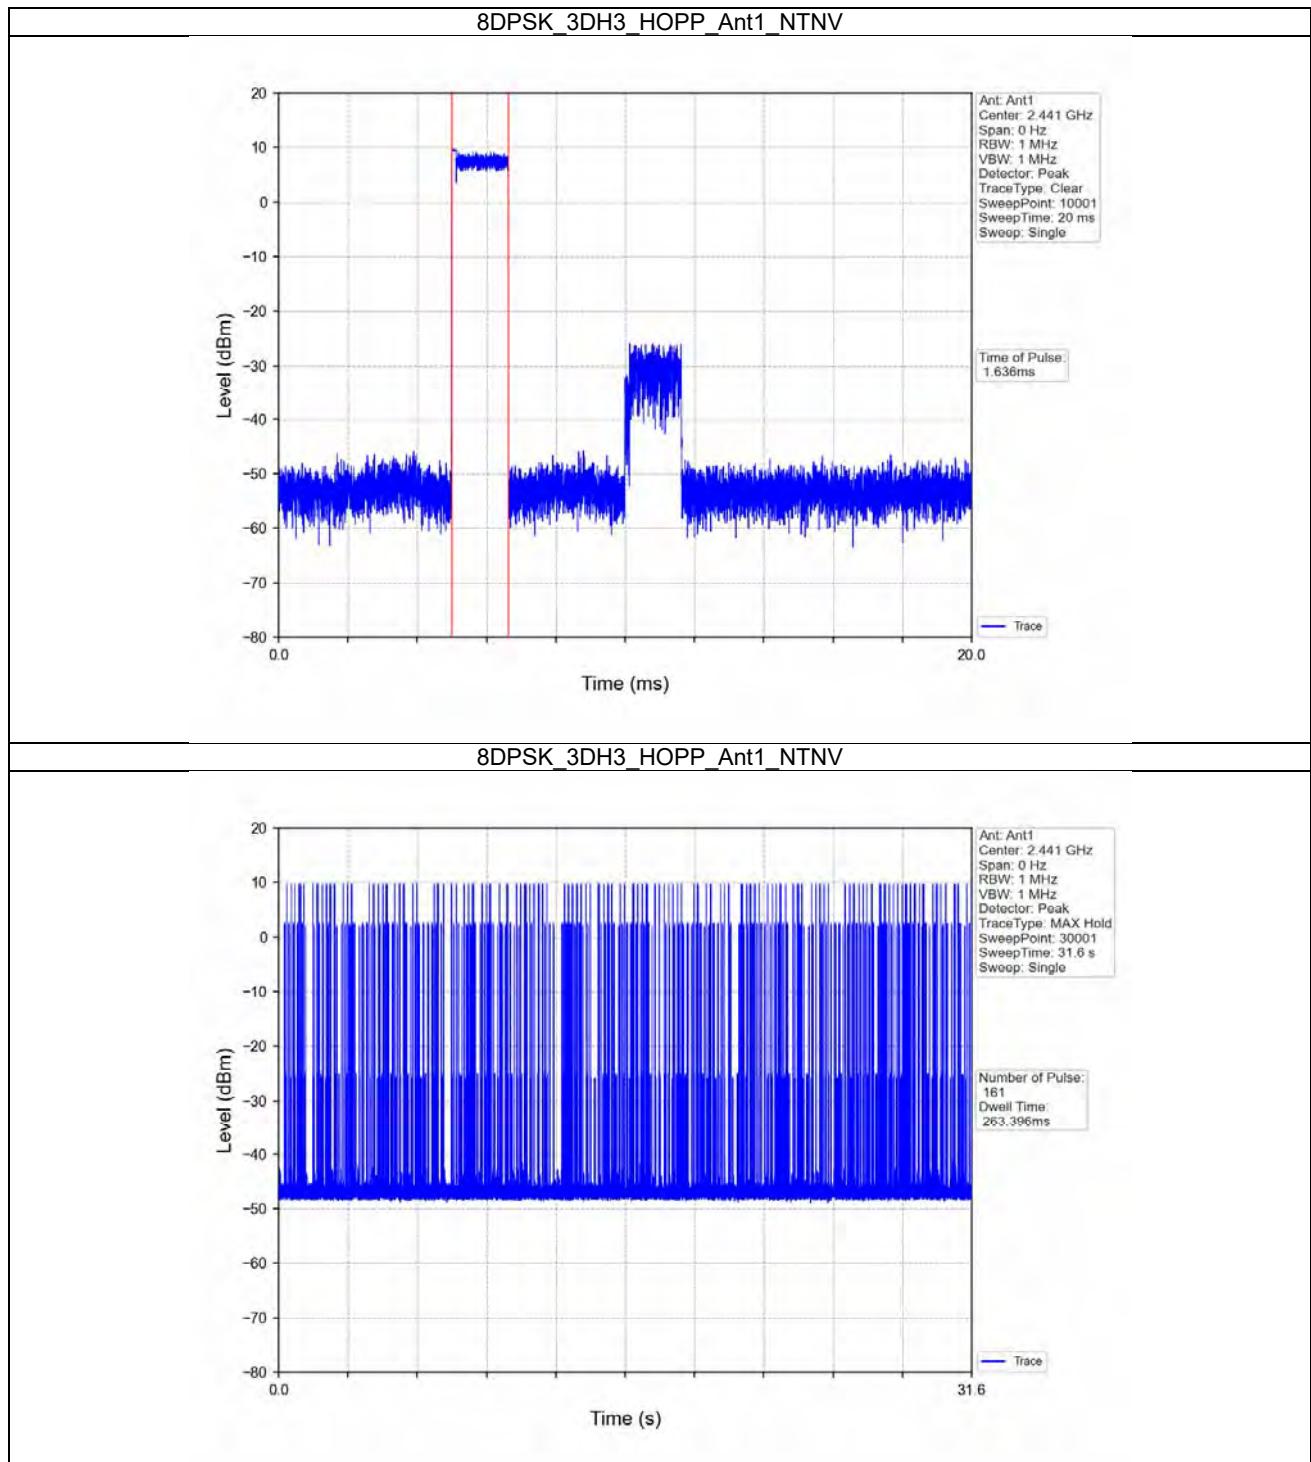



Report No.: W7L-P21100025RF01

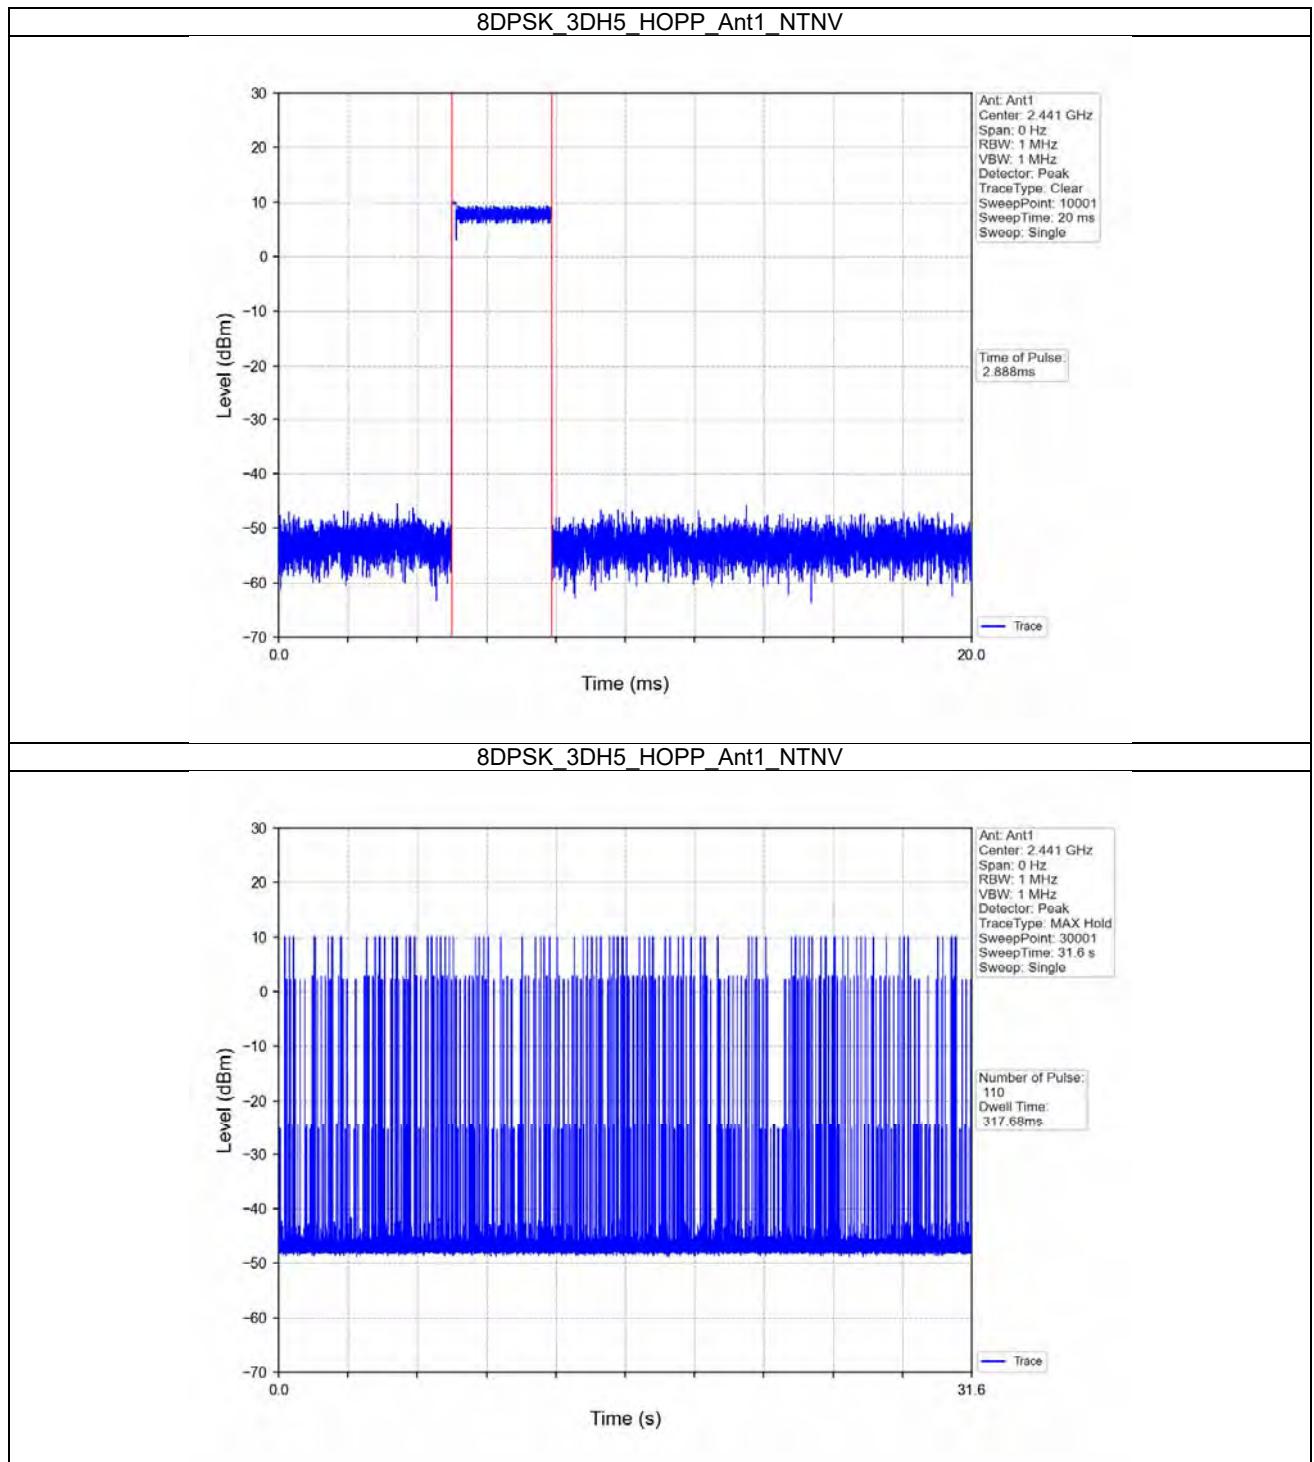



Report No.: W7L-P21100025RF01

Unwanted Emissions In Non-restricted Frequency Bands


Ref

Test Result

Mode	TX Type	Frequency (MHz)	Packet Type	Ant	Level of Reference (dBm)
GFSK	SISO	2402	DH5	1	10.50
		2441	DH5	1	9.77
		2480	DH5	1	10.13
Pi/4DQPSK	SISO	2402	2DH5	1	9.79
		2441	2DH5	1	9.39
		2480	2DH5	1	9.63
8DPSK	SISO	2402	3DH5	1	9.97
		2441	3DH5	1	9.70
		2480	3DH5	1	9.69


Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2013, the channel contains the maximum PSD level was used to establish the reference level.

Test Graph

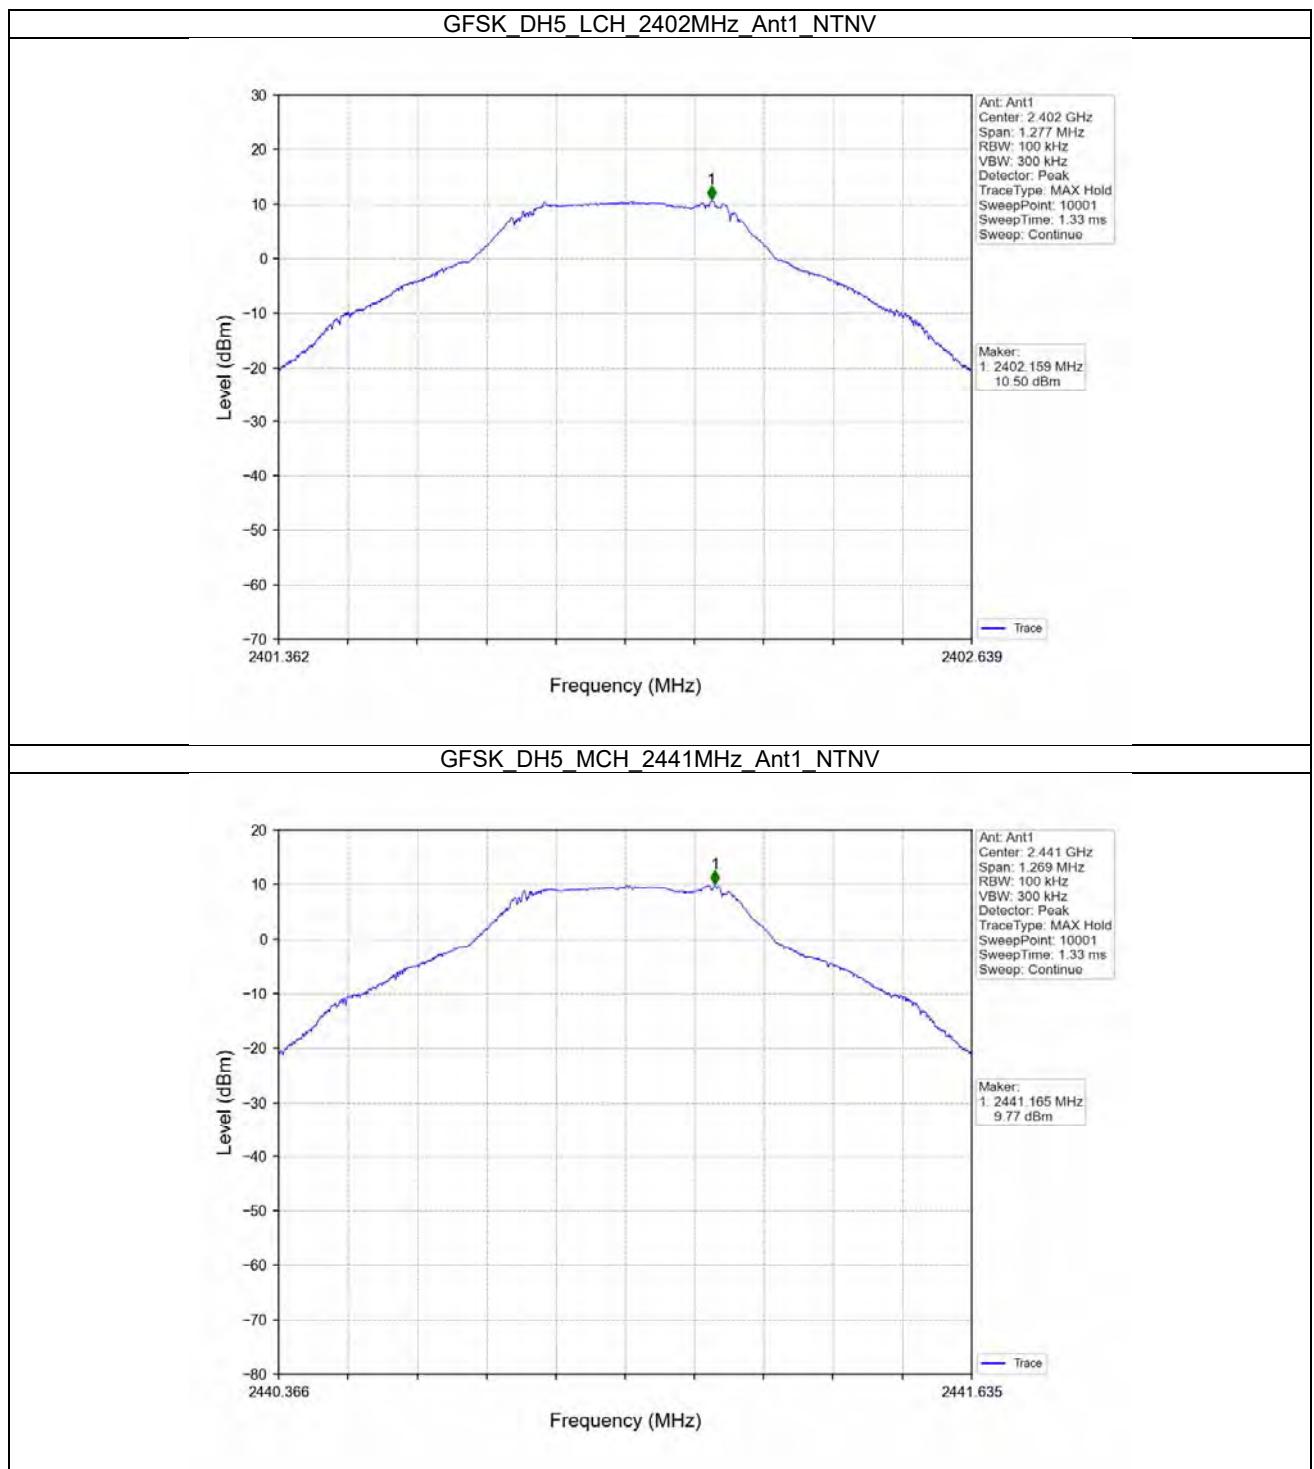




Report No.: W7L-P21100025RF01

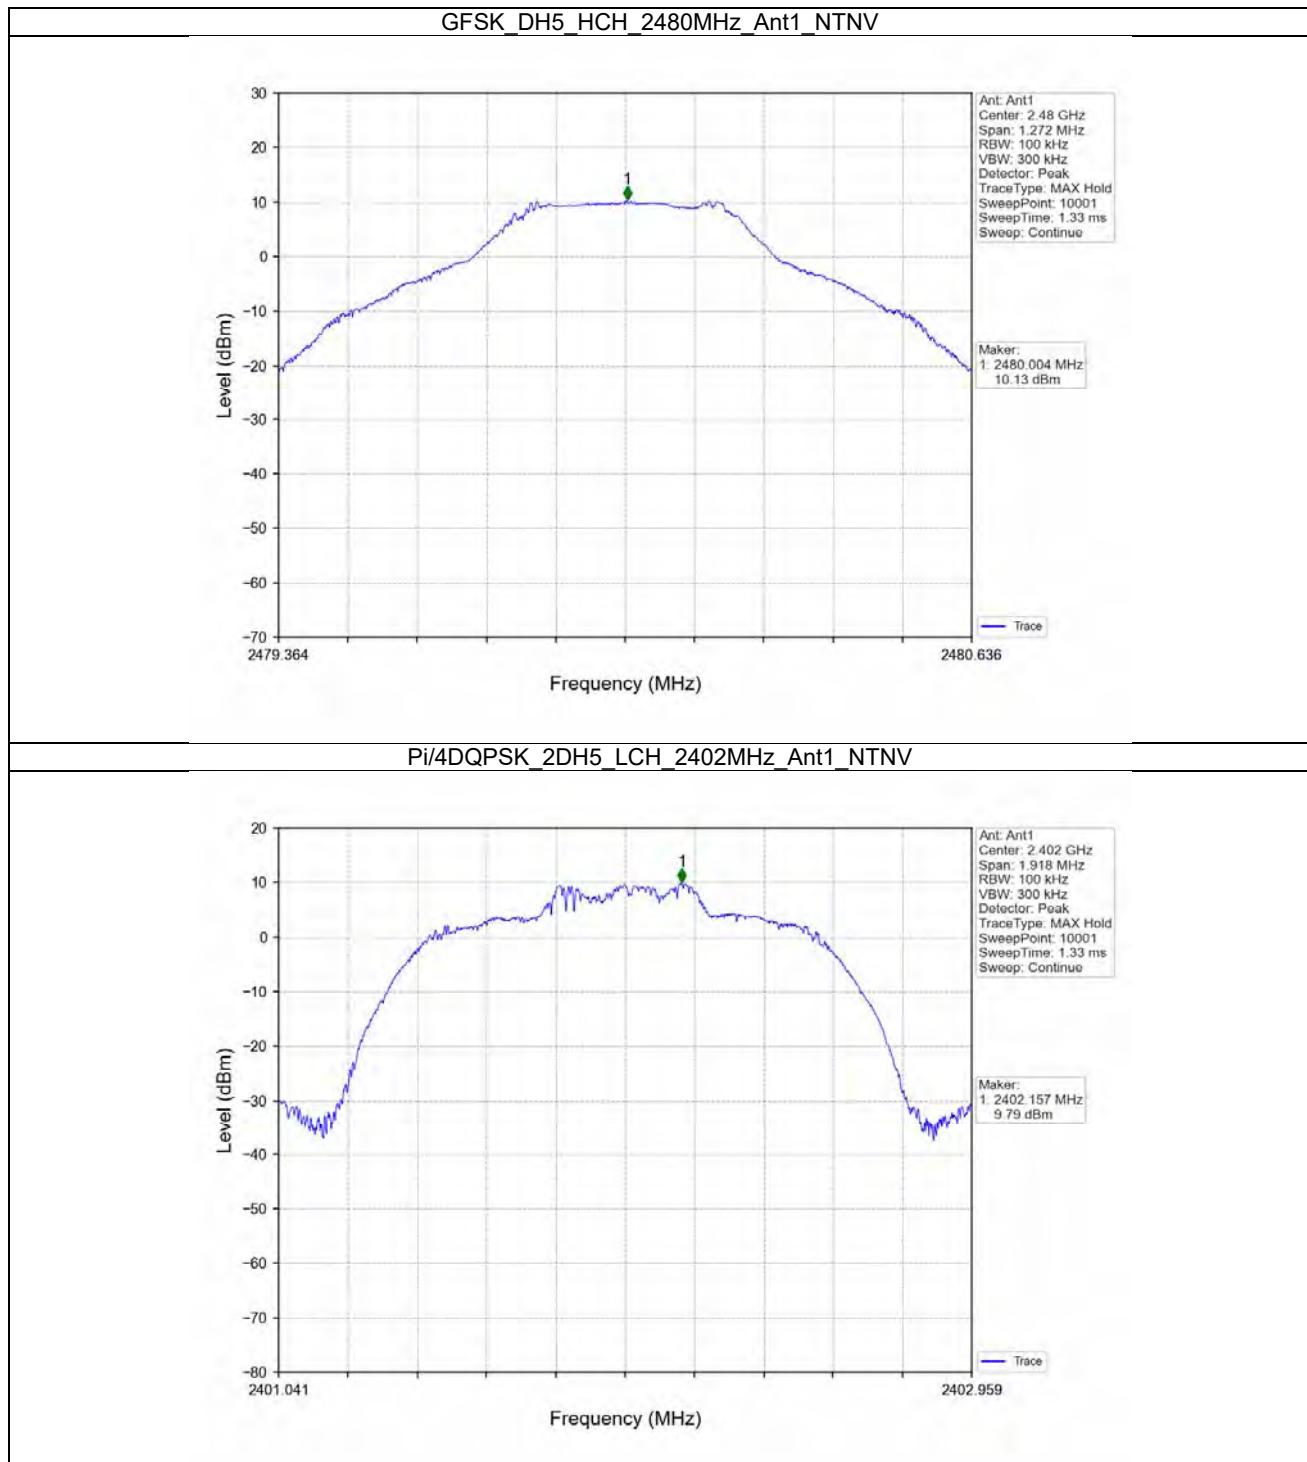




Report No.: W7L-P21100025RF01

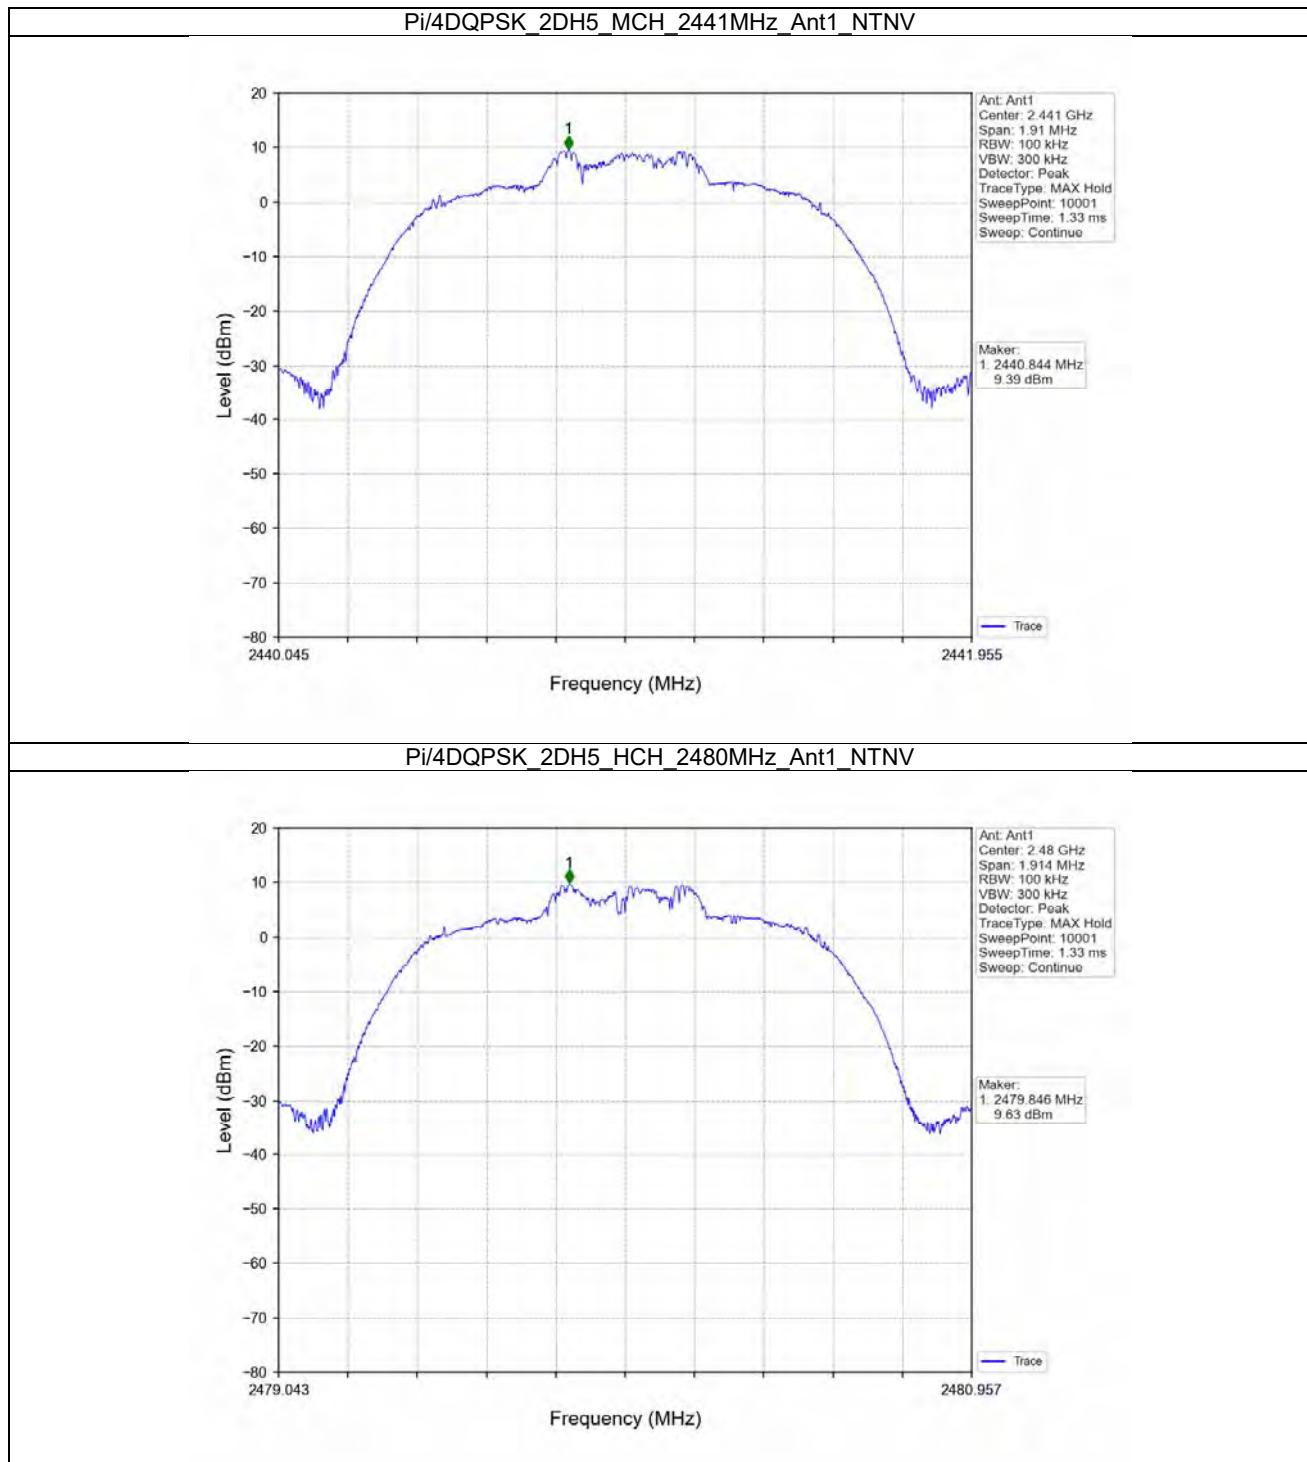




Report No.: W7L-P21100025RF01

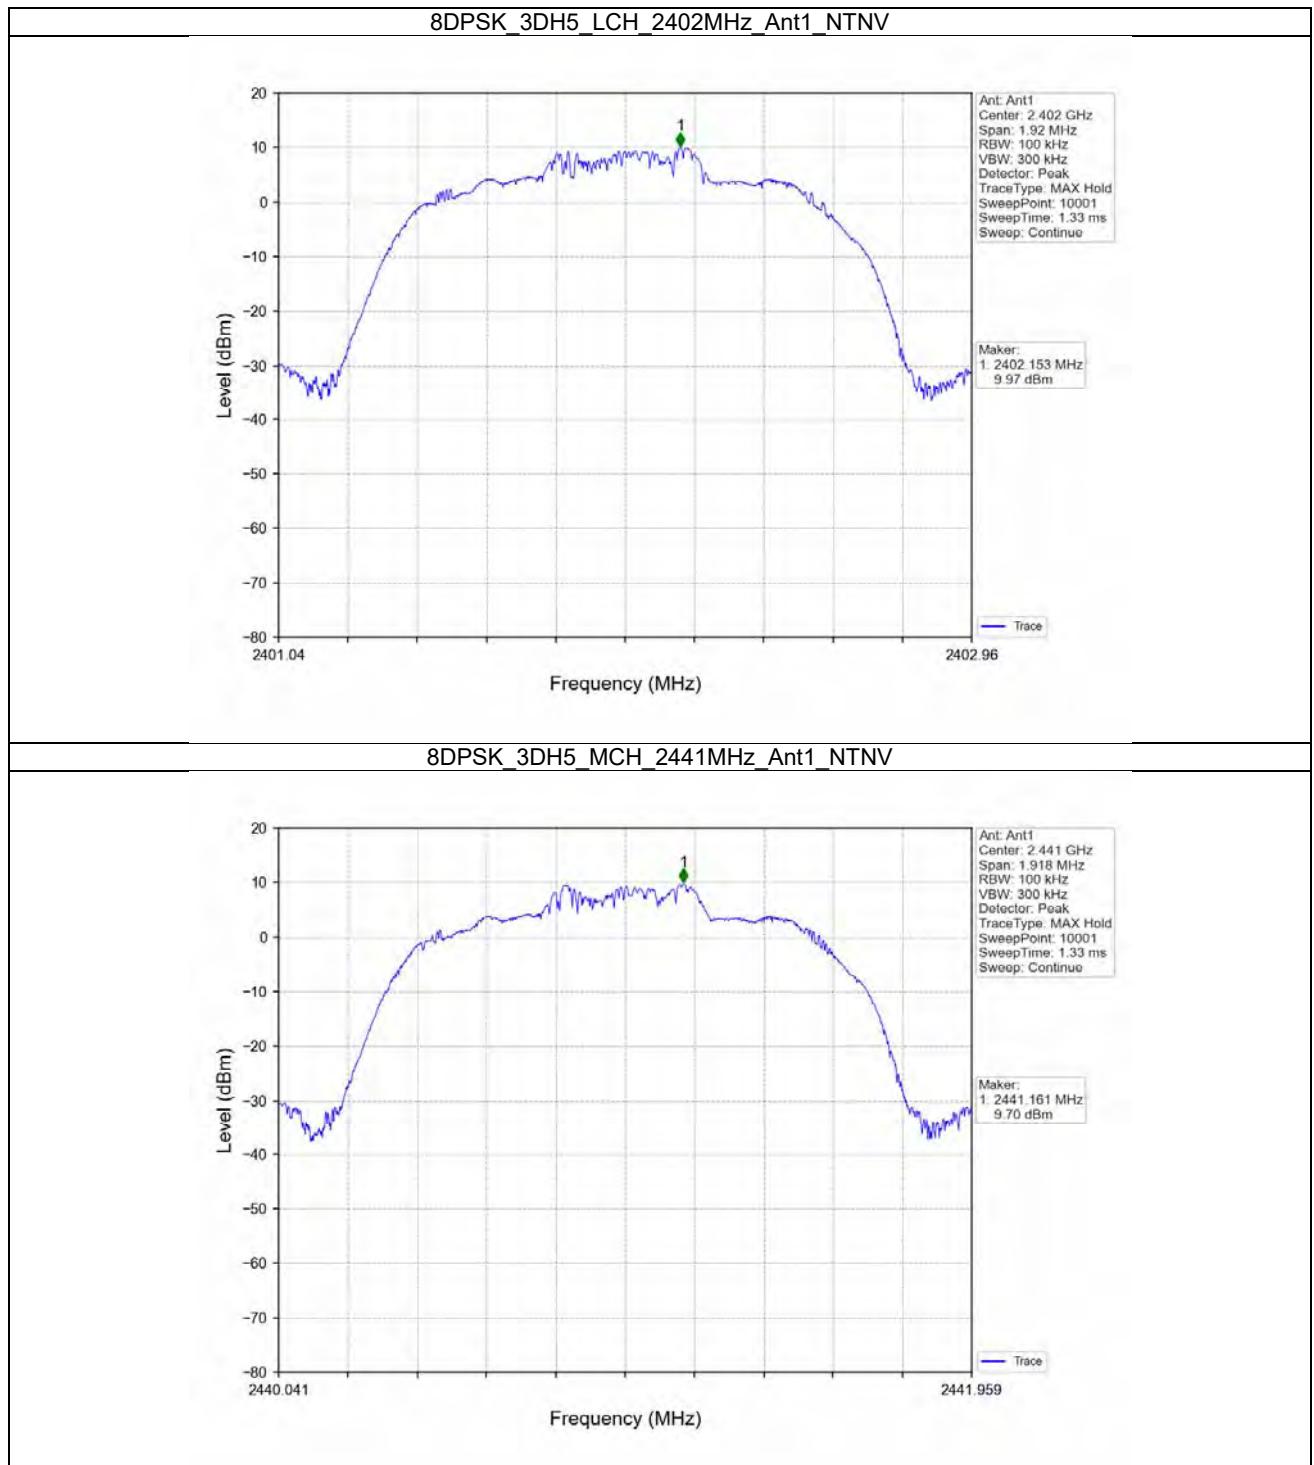



Report No.: W7L-P21100025RF01

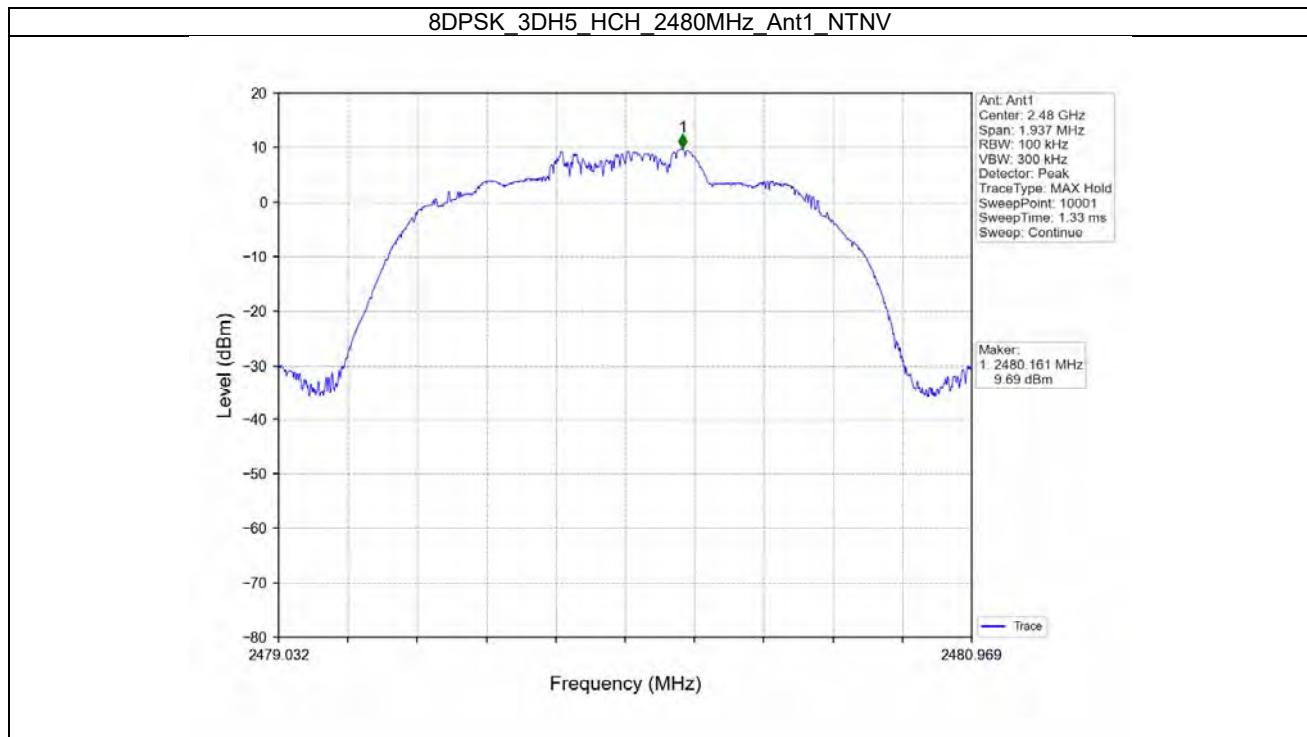



Report No.: W7L-P21100025RF01


CSE

Test Result

Mode	TX Type	Frequency (MHz)	Packet Type	Ant	Level of Reference (dBm)	Limit (dBm)	Verdict
GFSK	SISO	2402	DH5	1	10.50	-9.50	Pass
		2441	DH5	1	10.50	-9.50	Pass
		2480	DH5	1	10.50	-9.50	Pass
		HOPP	DH5	1	10.50	-9.50	Pass
Pi/4DQPSK	SISO	2402	2DH5	1	9.79	-10.21	Pass
		2441	2DH5	1	9.79	-10.21	Pass
		2480	2DH5	1	9.79	-10.21	Pass
		HOPP	2DH5	1	9.79	-10.21	Pass
8DPSK	SISO	2402	3DH5	1	9.97	-10.03	Pass
		2441	3DH5	1	9.97	-10.03	Pass
		2480	3DH5	1	9.97	-10.03	Pass
		HOPP	3DH5	1	9.97	-10.03	Pass


Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2013, the channel contains the maximum PSD level was used to establish the reference level.

Test Graph

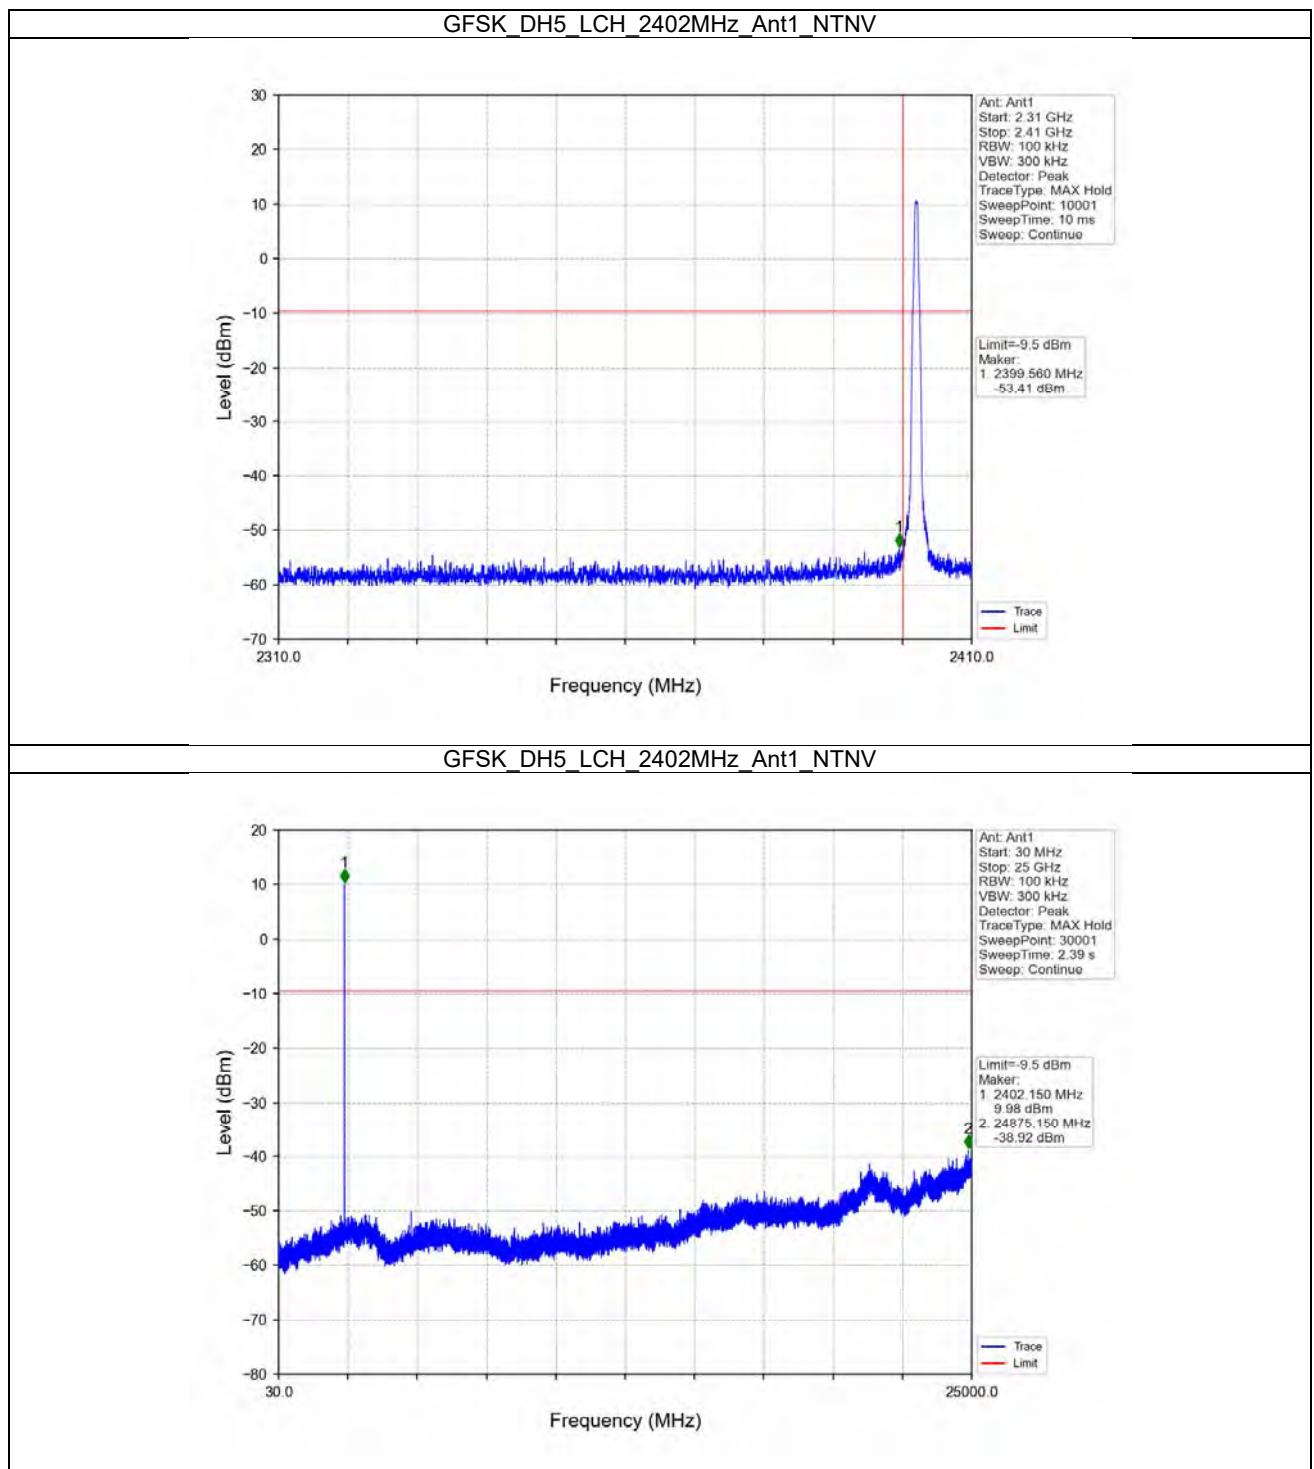




Report No.: W7L-P21100025RF01

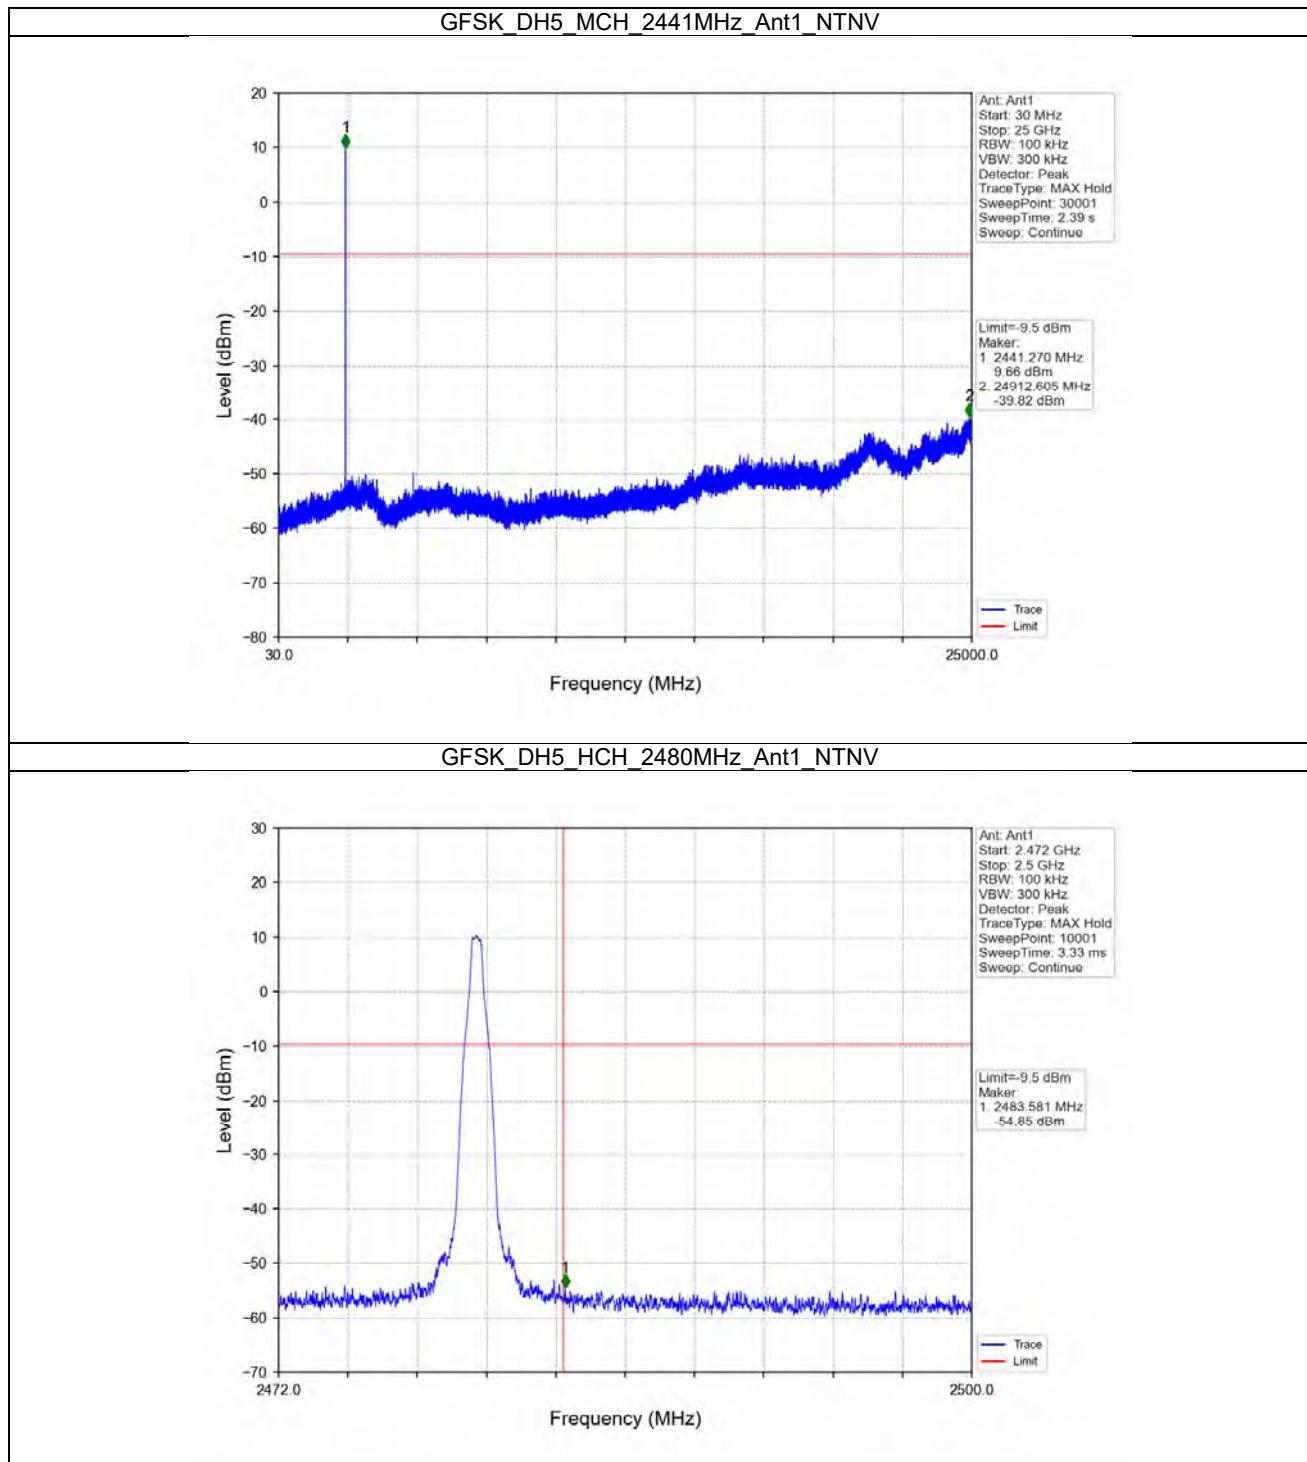





Report No.: W7L-P21100025RF01

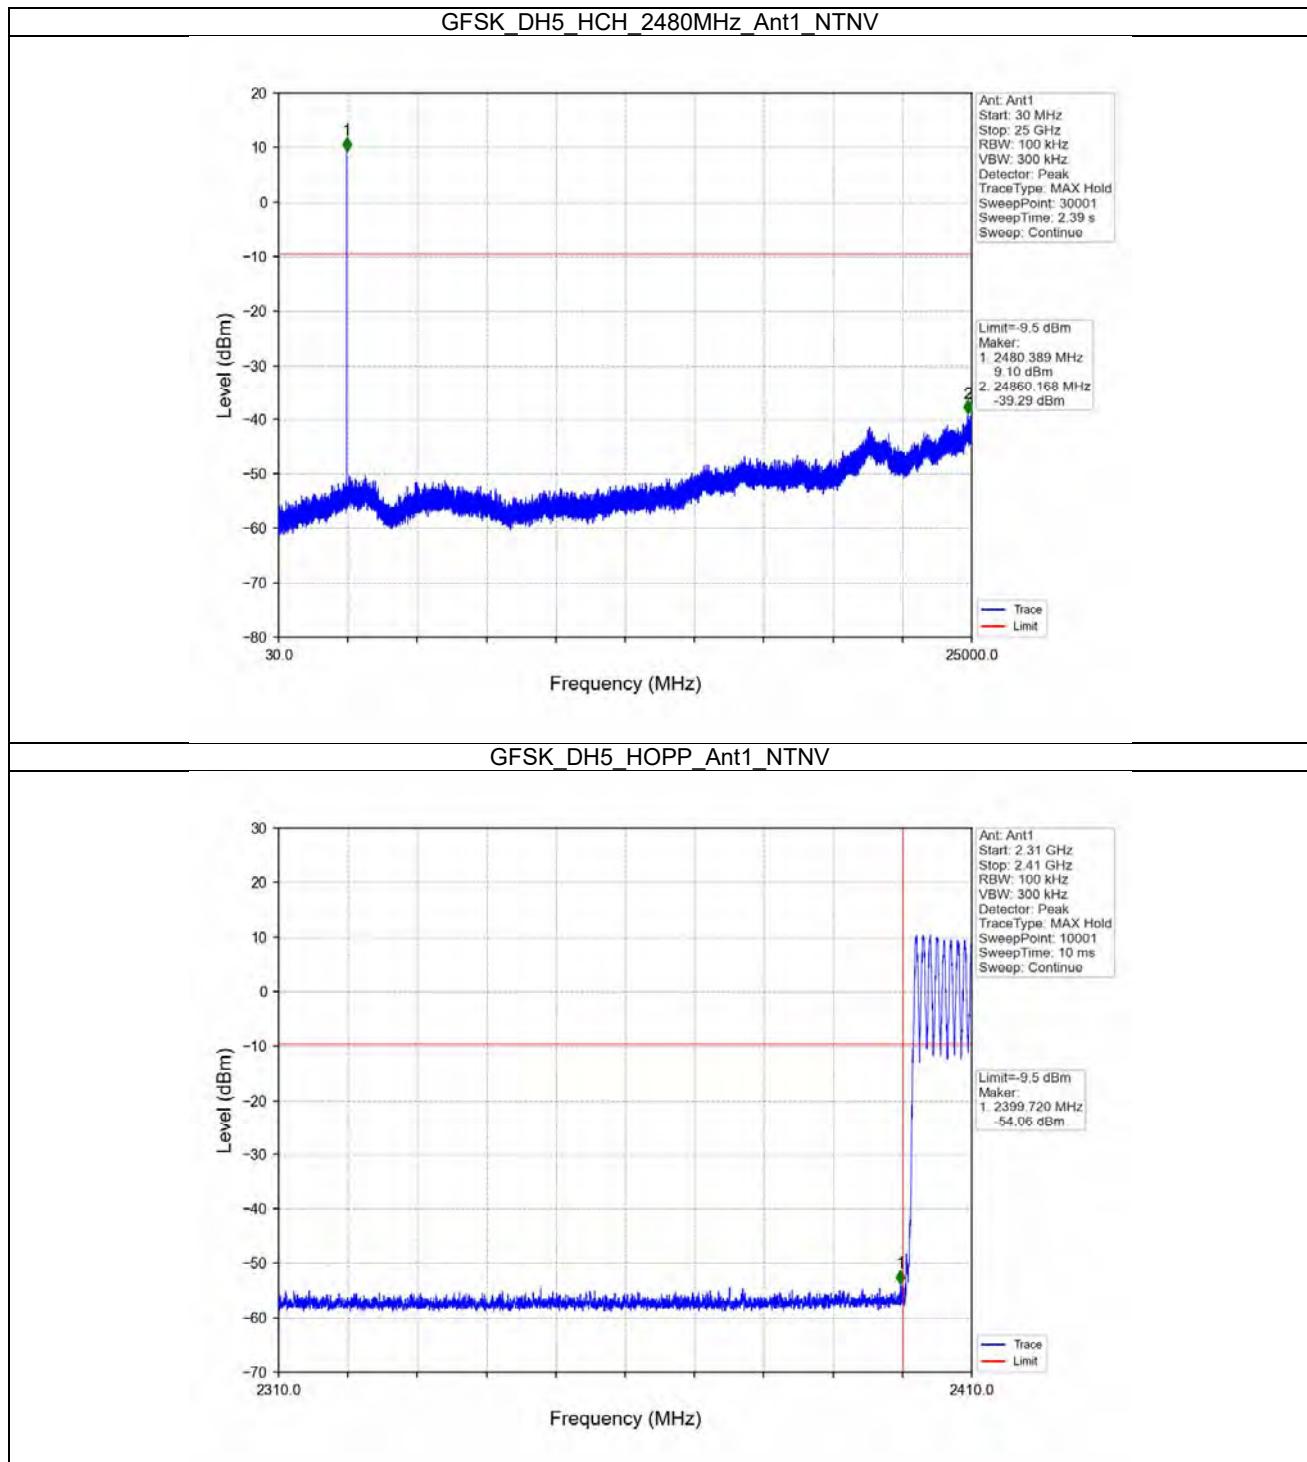




Report No.: W7L-P21100025RF01

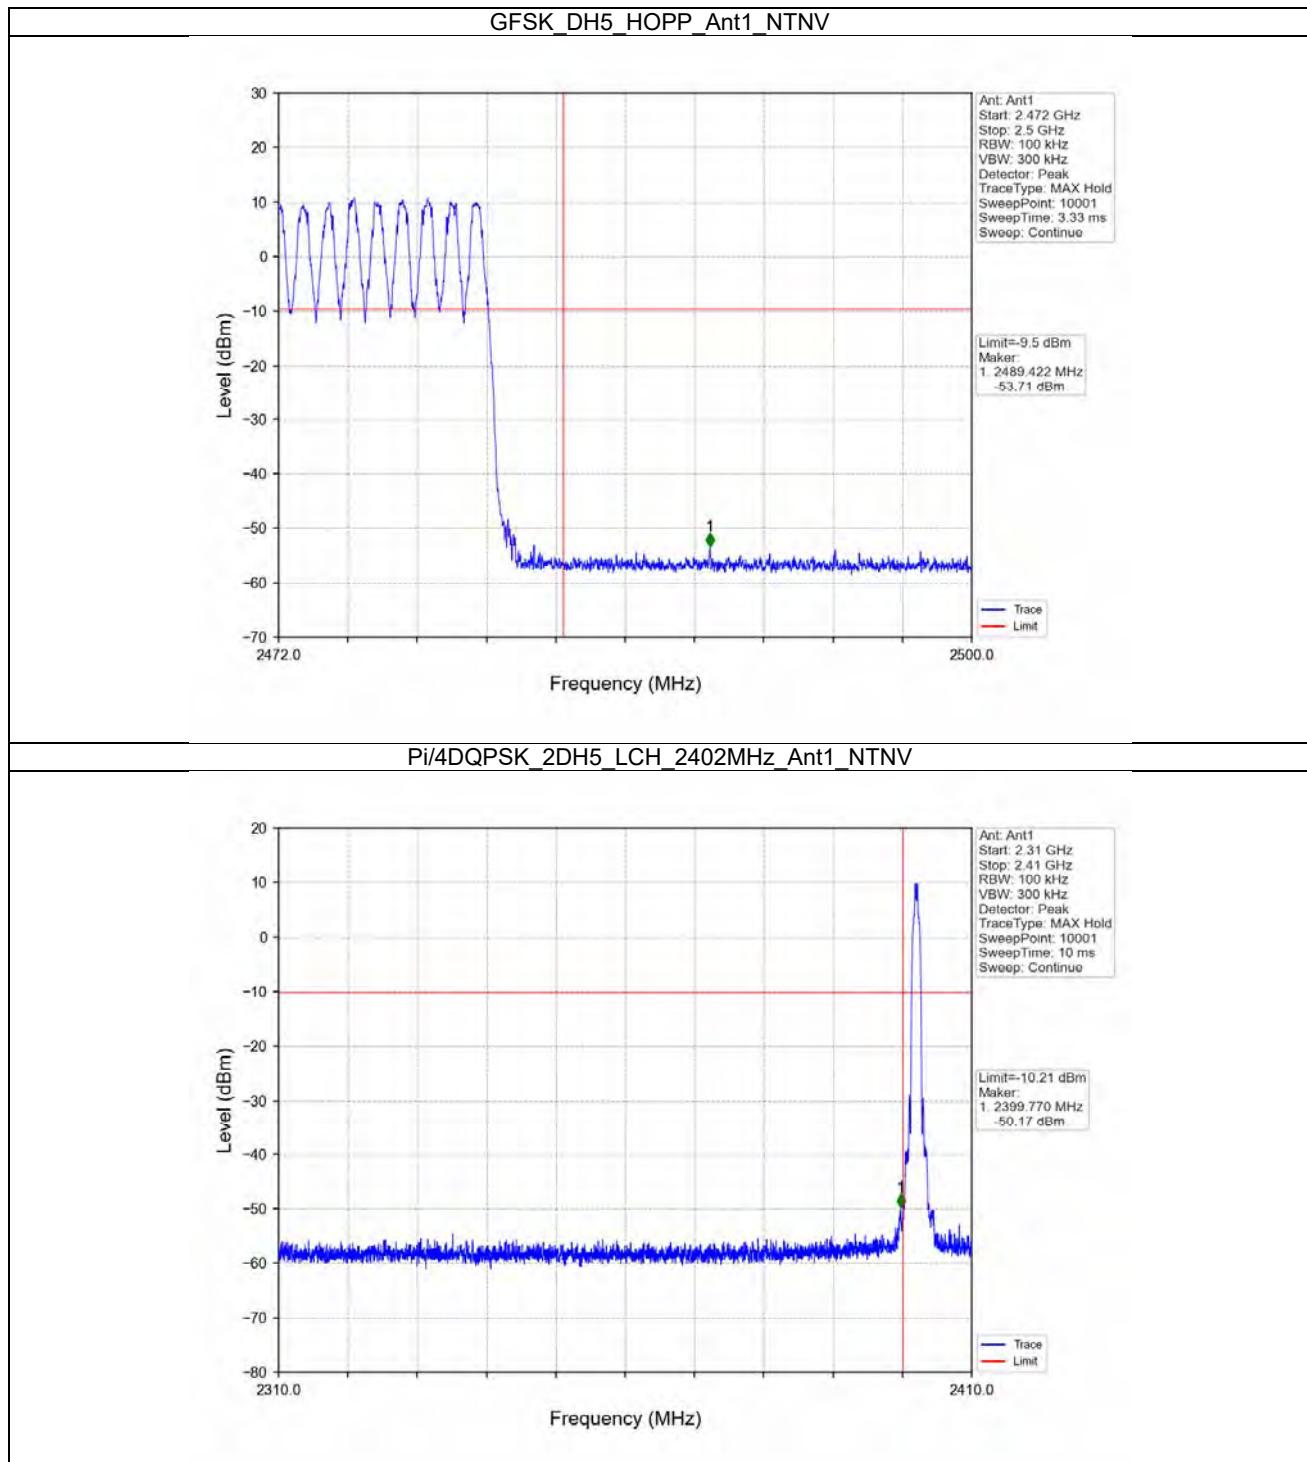

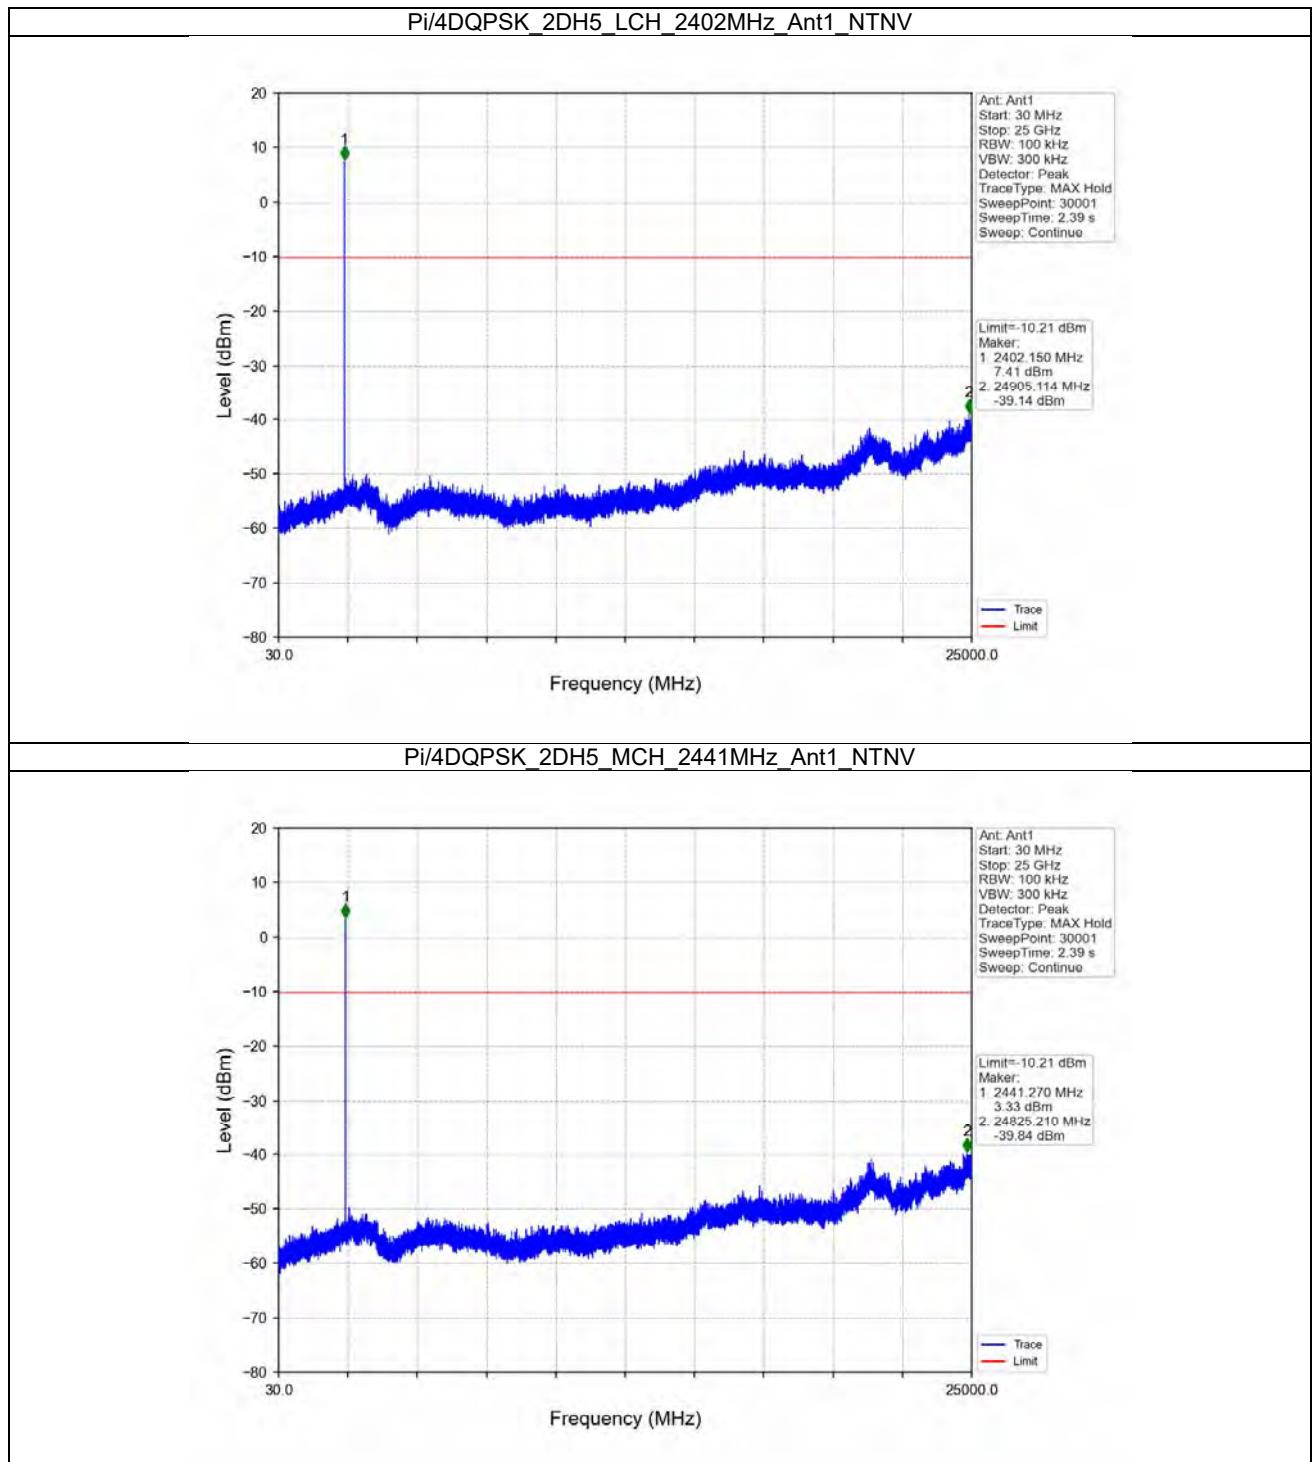




Report No.: W7L-P21100025RF01

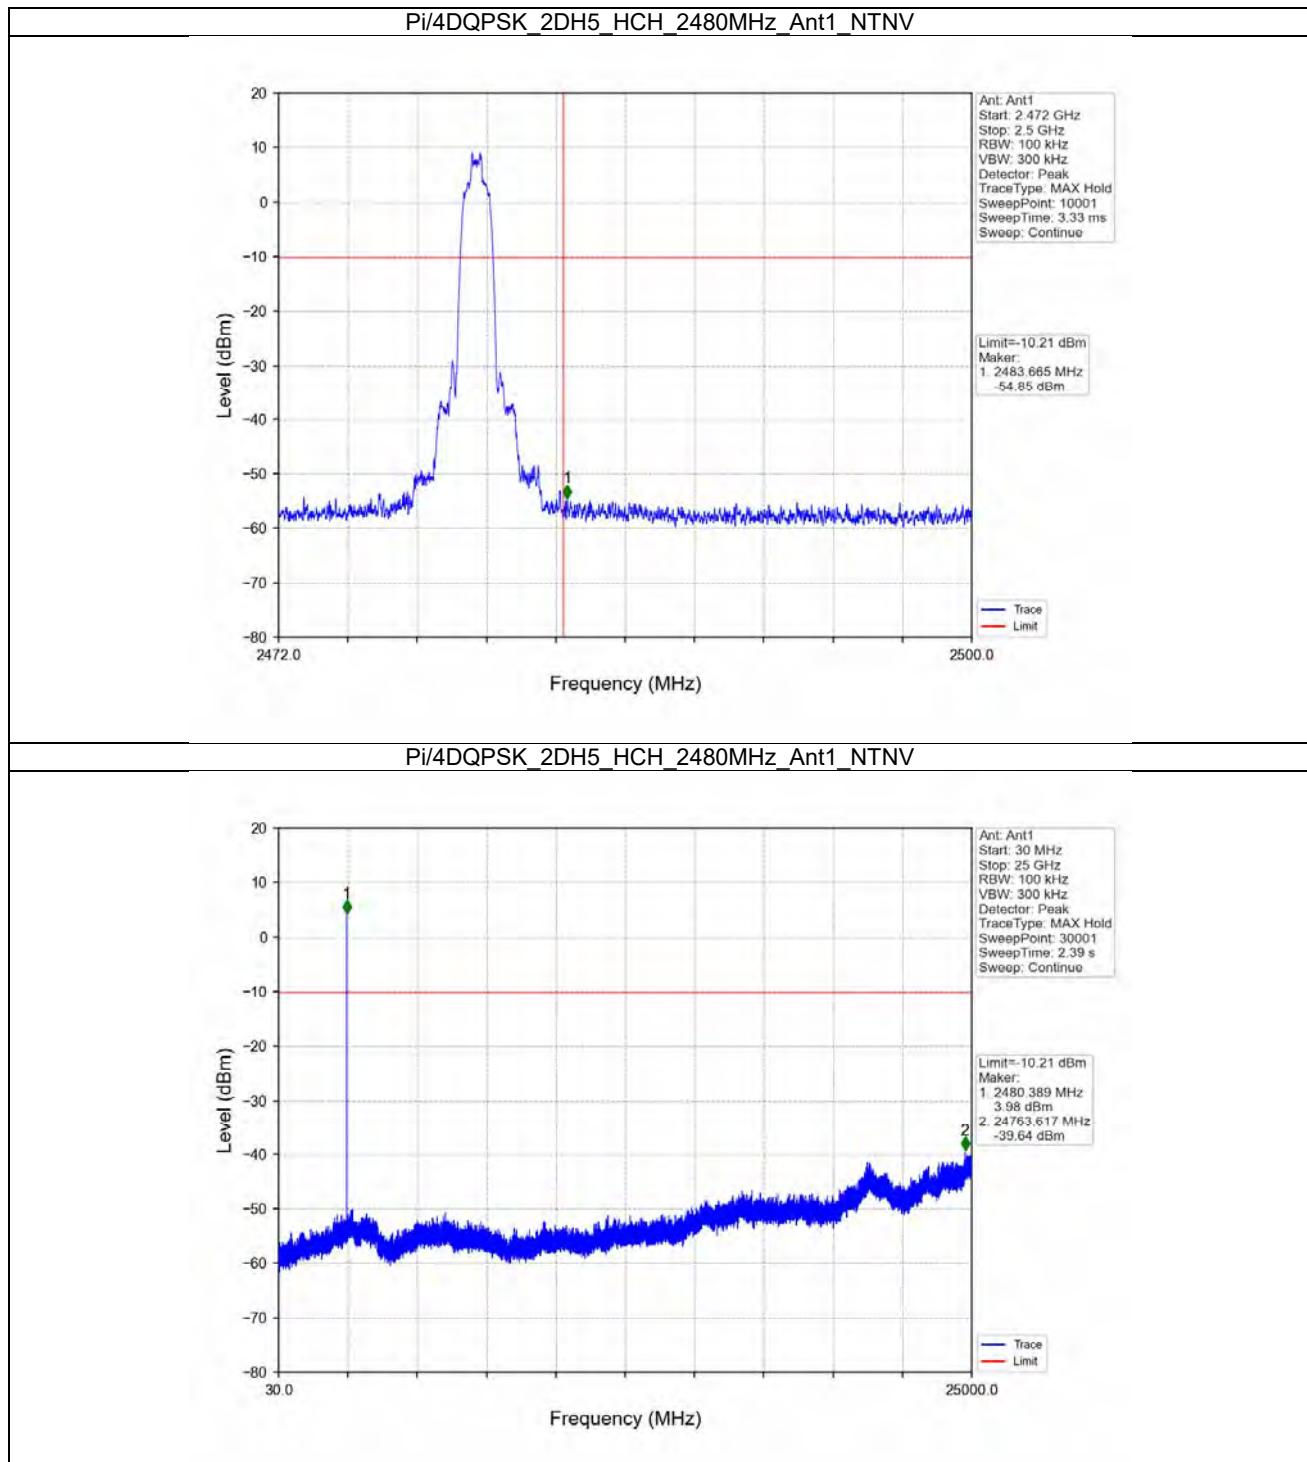





Report No.: W7L-P21100025RF01

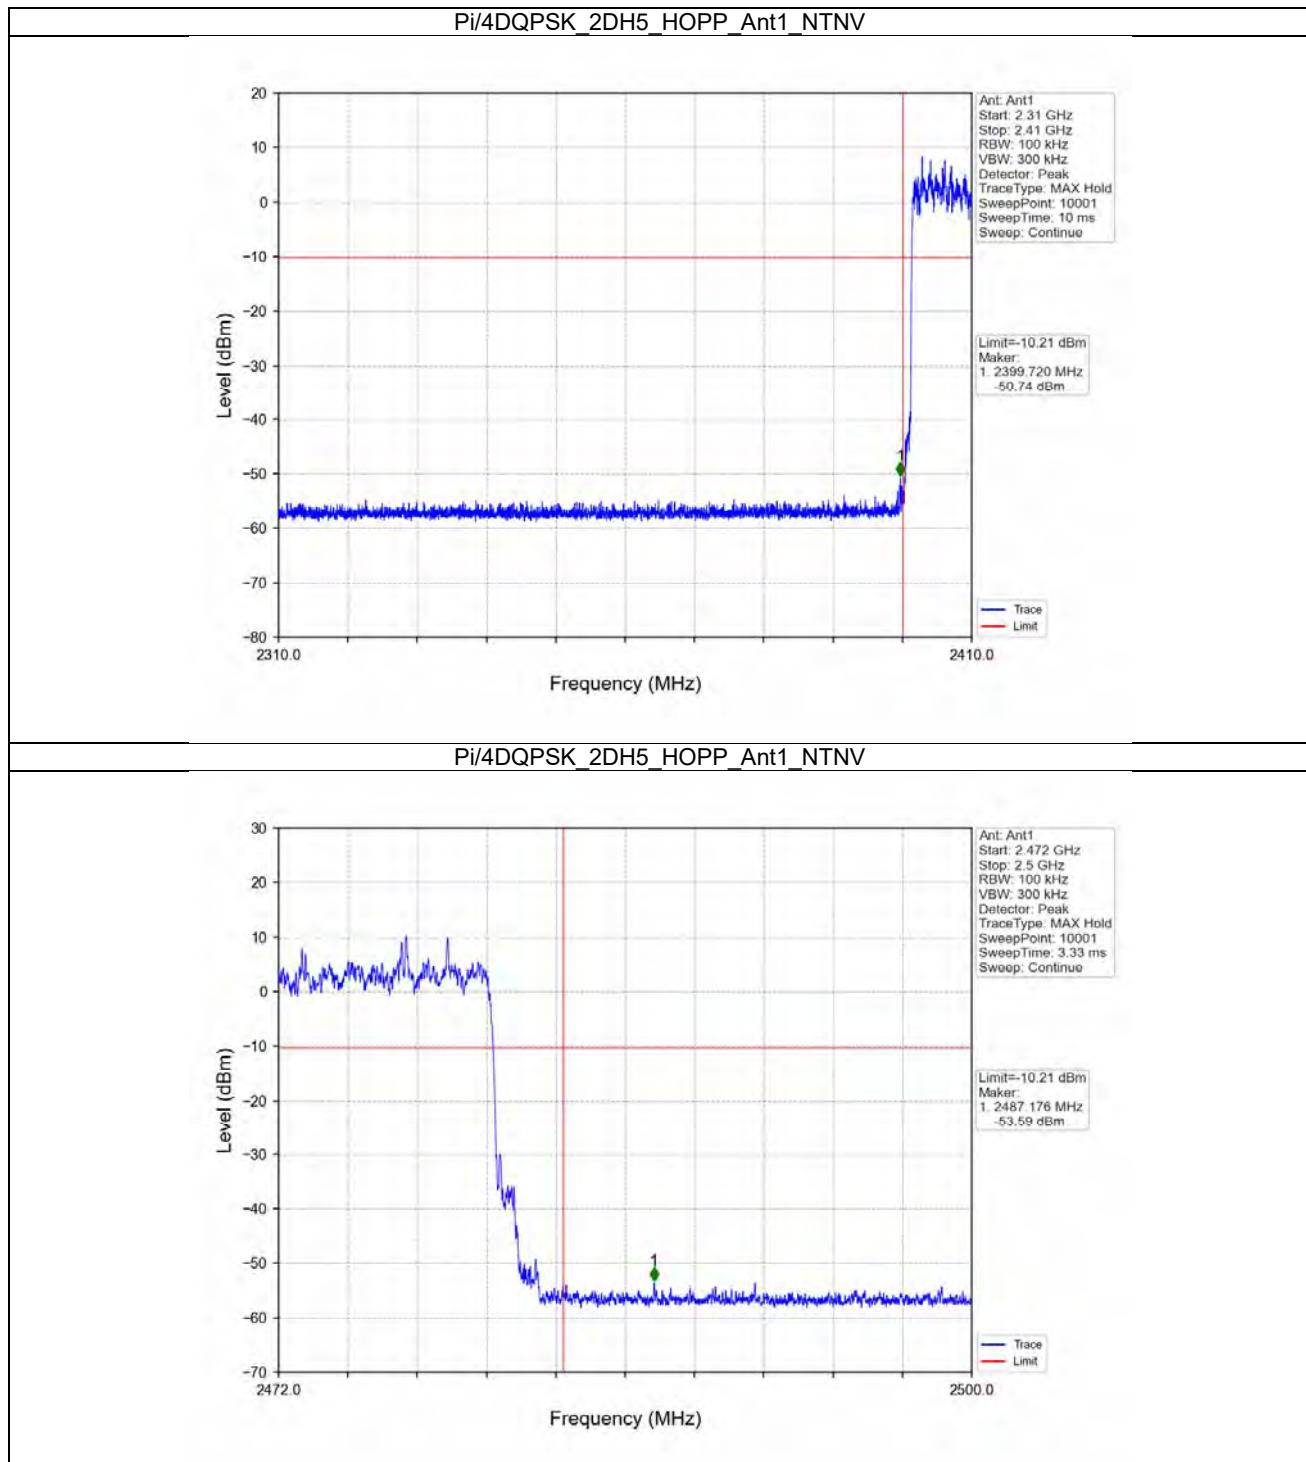




Report No.: W7L-P21100025RF01

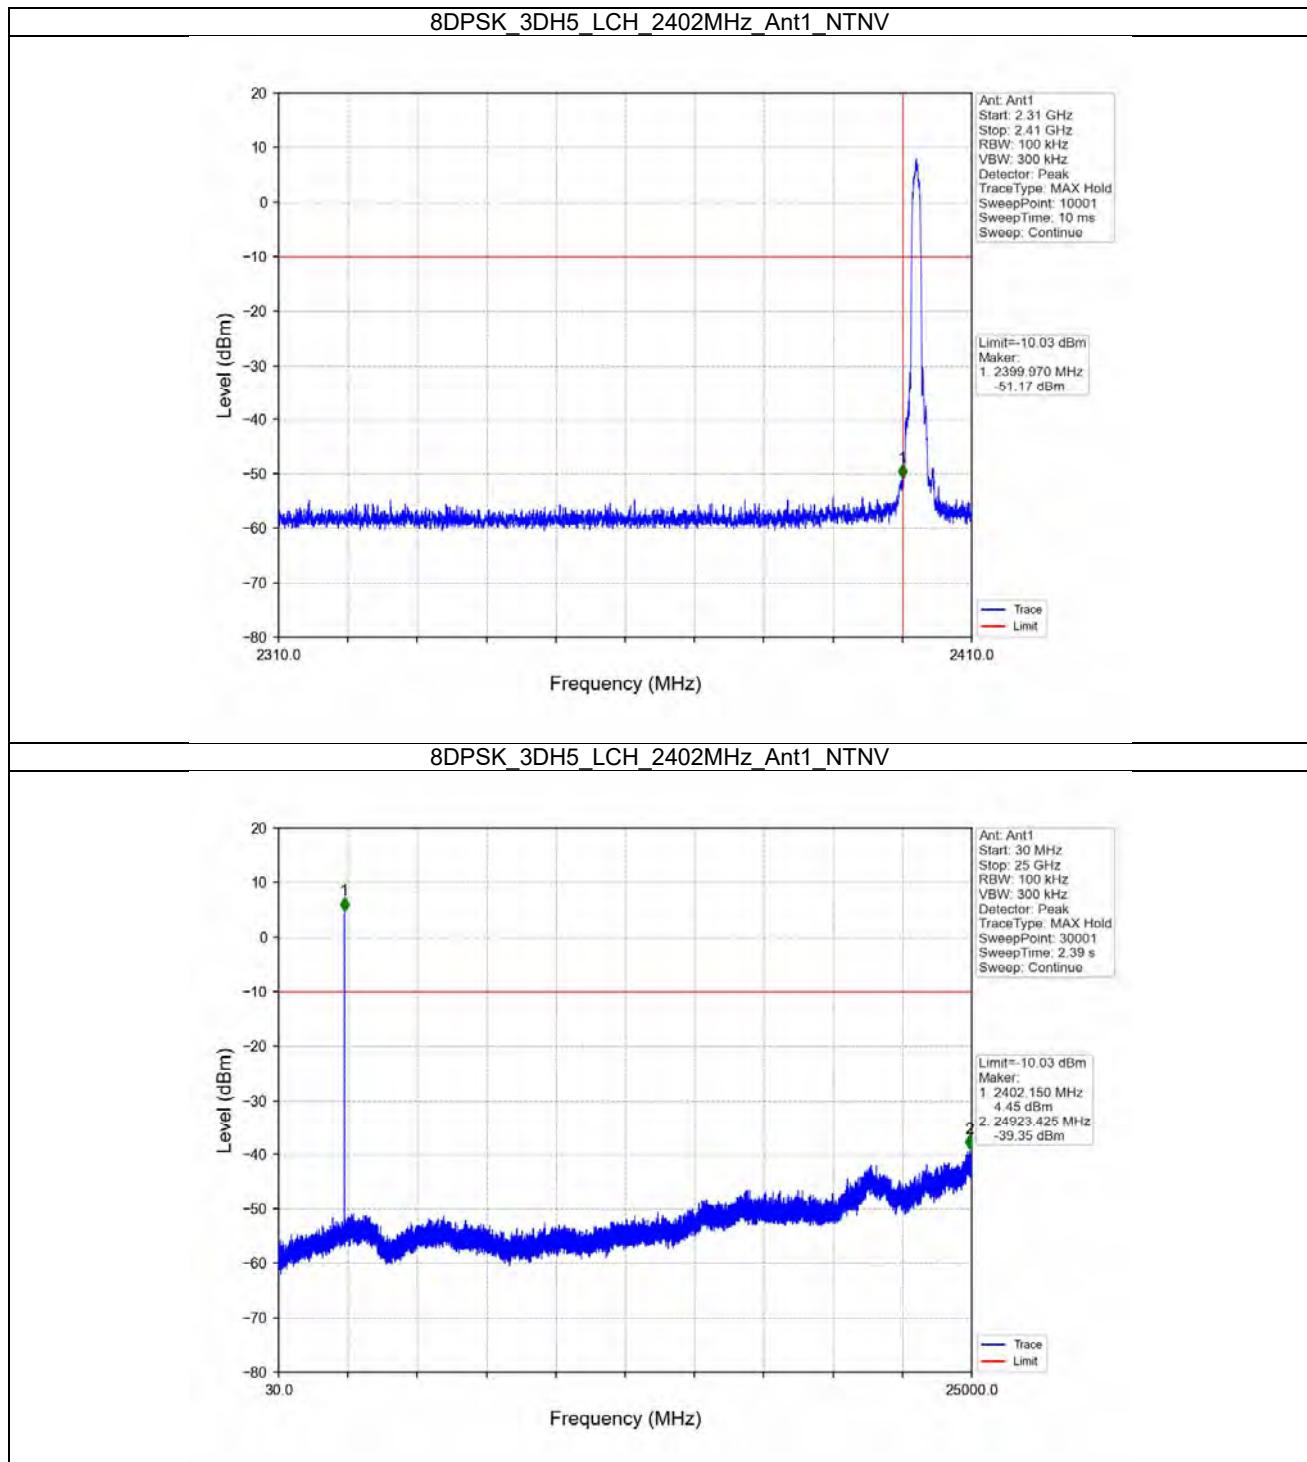

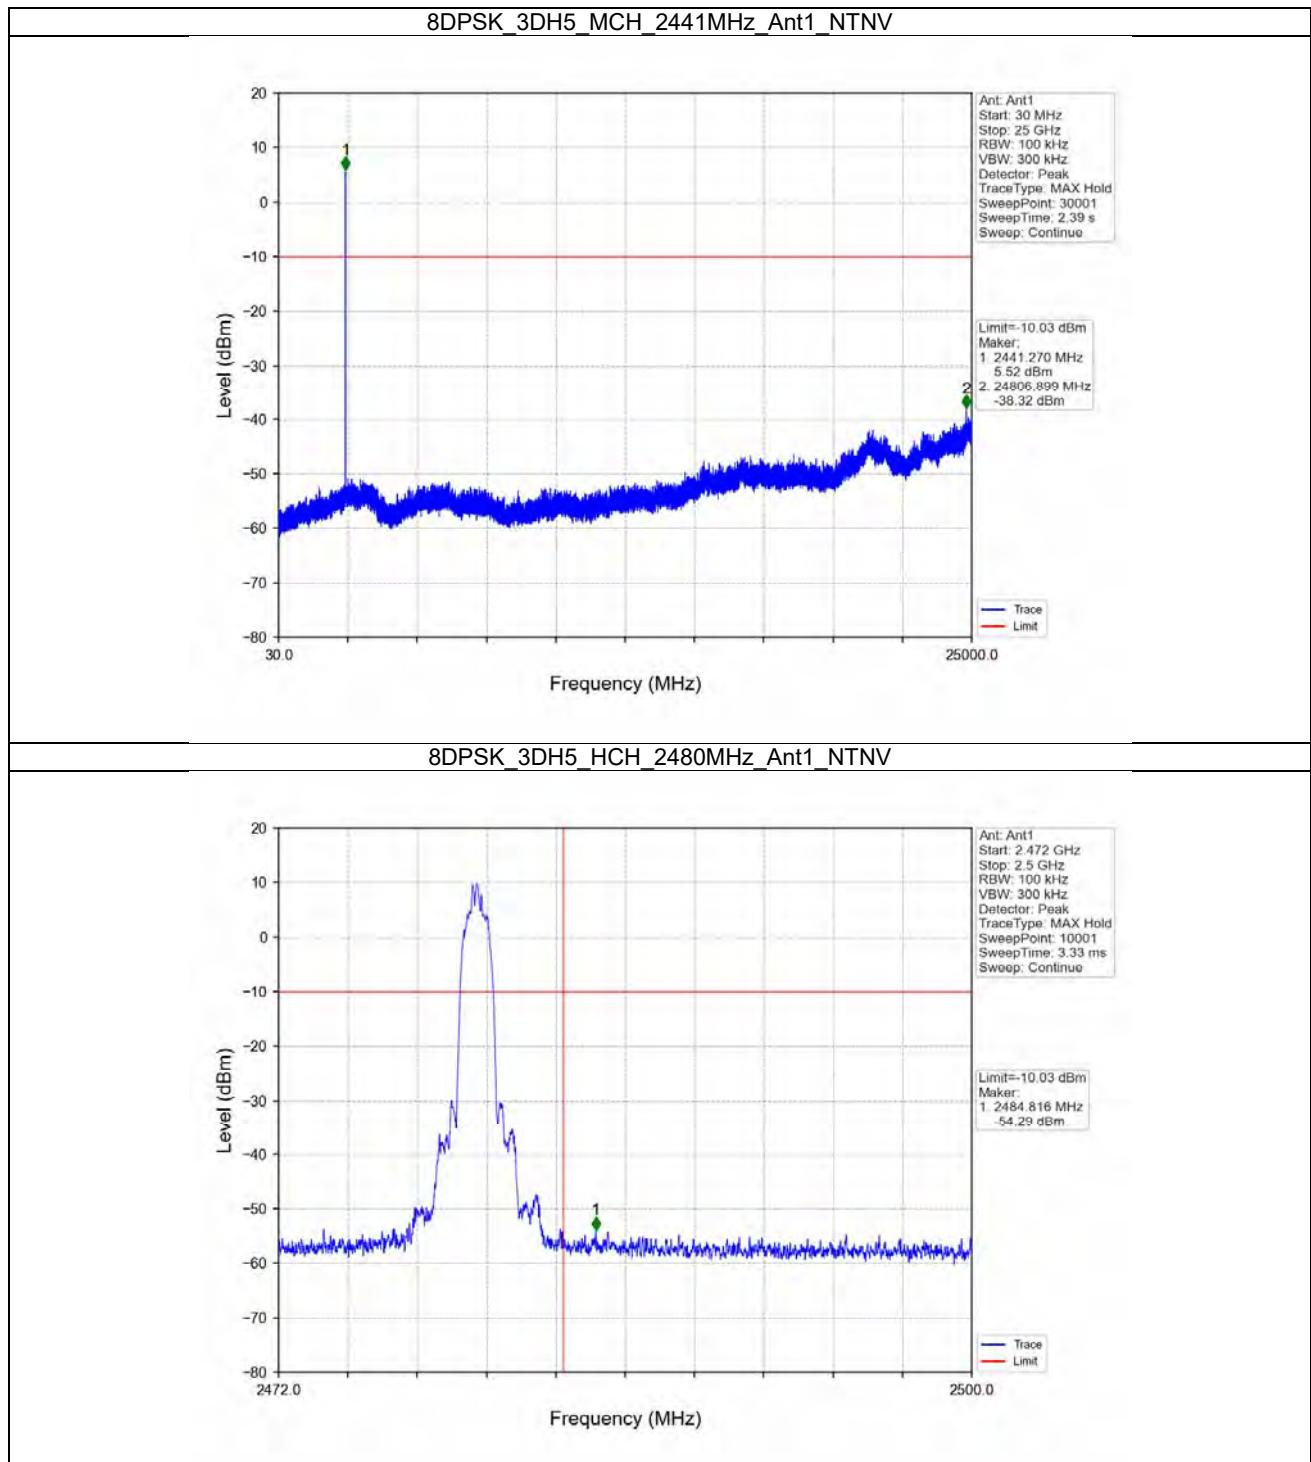



Report No.: W7L-P21100025RF01

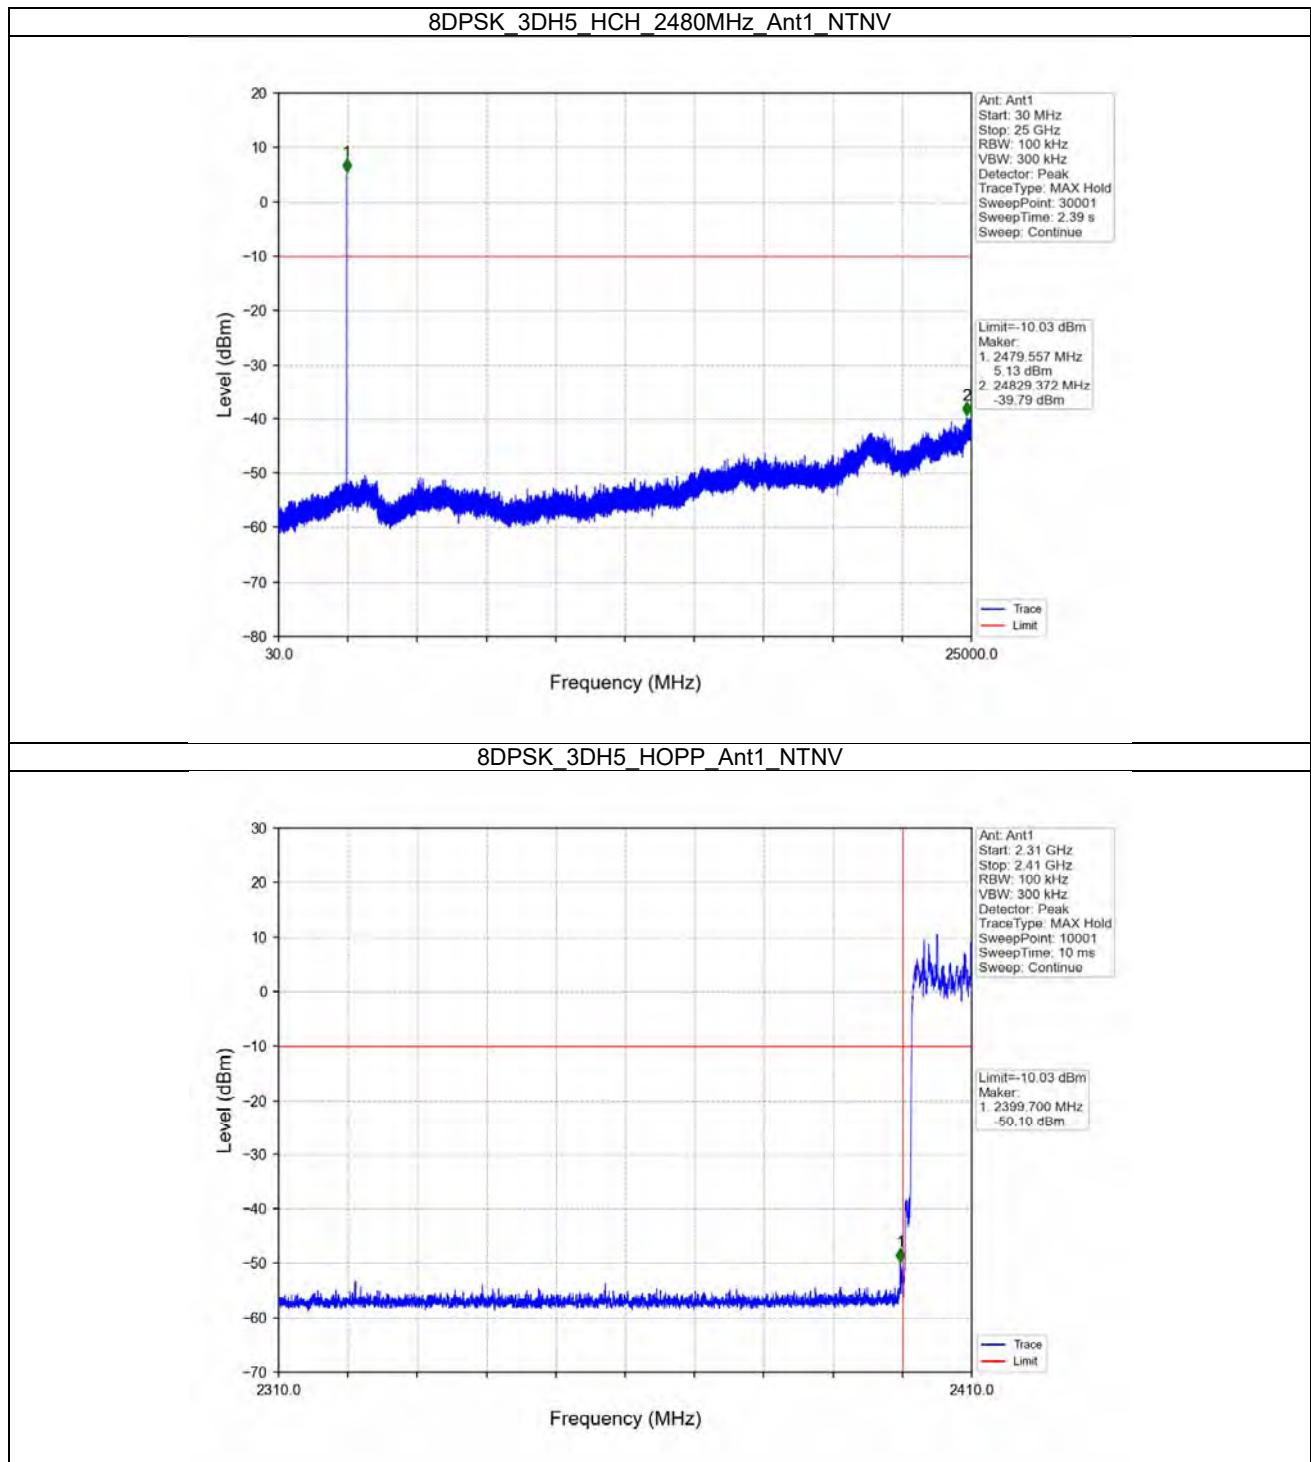



Report No.: W7L-P21100025RF01

