

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032311

Rev.: 01

Page: 1 of 123

FCC SAR TEST REPORT

Application No.: SUCR2504000323WM

Applicant: COOSEA GROUP (HK) COMPANY LIMITED

Manufacturer: COOSEA GROUP (HK) COMPANY LIMITED

Product Name: Smart Phone

Model No.(EUT): SN512A/SN512C -----♣

♣ Please refer to section 1.4 of this report which indicates which model was actually tested and which were electrically identical.

FCC ID: 2A28USN512

Standards: FCC 47CFR §2.1093

Date of Receipt: 2025-04-25

Date of Test: 2025-05-16 to 2025-06-08

Date of Issue: 2025-06-13

Test conclusion: **PASS ***

* In the configuration tested, the EUT detailed in this report complied with the standards specified above.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.


Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone:(86-755) 8307 1443, or email: CN.Doccheck@sgs.com



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032311
Rev.: 01
Page: 2 of 123

Revision Record			
Version	Description	Date	Remark
01	Original	2025/06/13	/

Authorized for issue by:		
Prepared By		
		Leon Liu/ Project Manager
Approved By		
		Nick Hu/ Technical Manager

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032311

Rev.: 01

Page: 3 of 123

TEST SUMMARY

Frequency Band	Maximum Reported SAR(W/kg)			
	Head	Body-worn	Hotspot	Product specific 10g SAR
WCDMA Band II	1.18	0.73	0.87	3.16
WCDMA Band IV	1.16	0.66	1.01	3.15
WCDMA Band V	0.39	0.38	0.42	/
LTE Band 2	1.08	0.65	1.02	2.90
LTE Band 5	0.38	0.41	0.55	/
LTE Band 7	0.96	0.44	1.15	/
LTE Band 12(17)	0.20	0.41	0.42	/
LTE Band 14	0.25	0.39	0.39	/
LTE Band 30	1.13	0.84	0.82	2.97
LTE Band 66(4)	1.13	0.72	1.19	/
NR Band n2	1.17	0.69	1.08	3.00
NR Band n5	0.37	0.43	0.42	/
NR Band n30	0.98	0.96	0.83	2.89
NR Band n66	1.04	0.65	1.04	3.16
NR Band n77	1.18	0.65	0.96	3.08
WI-FI (2.4GHz)	1.01	0.18	0.36	/
WI-FI (5GHz)	1.15	0.57	0.40	1.09
BT	0.26	<0.10	<0.10	/
NFC	/	/	/	<0.10
SAR Limited(W/kg)	1.60			4.00
Maximum Simultaneous Transmission SAR (W/kg)				
Scenario	Head	Body-worn	Hotspot	Product specific 10g SAR
Sum SAR	1.59	1.58	1.59	3.85
SPLSR	/	/	/	/
SPLSR Limited	0.04			0.1

Note:

1) According to TCB workshop October,2014 RF Exposure Procedures Update (Overlapping Bands): SAR for LTE Band 4 (Frequency range:1710 - 1755 MHz)/LTE Band 17 (Frequency range:704-716 MHz) is respectively covered by LTE Band66 (Frequency range:1710 - 1780 MHz)/ LTE Band 12 (Frequency range:699-716 MHz) due to similar frequency range, same maximum tune up limit and same channel bandwidth.

2) For LTE band 4/5/12/14/17/30 and n5/n30/n66/n77 that do not support at least three non-overlapping channels in certain channel bandwidths, test the available non-overlapping channels instead. When a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

CONTENTS

1 General Information	6
1.1 Details of Client	6
1.2 Test Location	6
1.3 Test Facility	6
1.4 General Description of EUT	7
1.4.1 DUT Antenna Locations (Back View)	9
1.4.2 Power reduction specification	10
1.5 Test Specification	11
1.6 RF exposure limits	12
2 Laboratory Environment	13
3 SAR Measurements System Configuration	14
3.1 The SAR Measurement System	14
3.2 Isotropic E-field Probe EX3DV4	16
3.3 Data Acquisition Electronics (DAE)	17
3.4 SAM Twin Phantom	17
3.5 ELI Phantom	18
3.6 Device Holder for Transmitters	19
3.7 Measurement procedure	20
3.7.1 Scanning procedure	20
3.7.2 Data Storage	22
3.7.3 Data Evaluation by SEMCAD	22
4 SAR measurement variability and uncertainty	24
4.1 SAR measurement variability	24
4.2 SAR measurement uncertainty	24
5 Description of Test Position	25
5.1 Head Exposure Condition	25
5.1.1 SAM Phantom Shape	25
5.1.2 EUT constructions	26
5.1.3 Definition of the “cheek” position	26
5.1.4 Definition of the “tilted” position	26
5.2 Body Exposure Condition	28
5.2.1 Body-worn accessory exposure conditions	28
5.2.2 Wireless Router exposure conditions	29
5.3 Extremity exposure conditions	29
5.4 Proximity Sensor Triggering Test	30
6 SAR System Verification Procedure	38
6.1 Tissue Simulate Liquid	38
6.1.1 Recipes for Tissue Simulate Liquid	38
6.1.2 Measurement for Tissue Simulate Liquid	39
6.2 SAR System Check	40
6.2.1 Justification for Extended SAR Dipole Calibrations	41
6.2.2 Summary System Check Result(s)	42
6.2.3 Detailed System Check Results	42
7 Test Configuration	43



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032311

Rev.: 01

Page: 5 of 123

7.1 Operation Configurations	43
7.1.1 WCDMA Test Configuration	43
7.1.2 WiFi Test Configuration	48
7.1.3 Duty cycle	48
7.1.4 BT Test Configuration	55
7.1.5 LTE Test Configuration	56
7.1.6 NR Band Test Configuration	61
8 Test Result	64
8.1 Measurement of RF Conducted Power	64
8.2 Measurement of SAR Data	65
8.2.1 SAR Result of WCDMA Band II	66
8.2.2 SAR Result of WCDMA Band IV	67
8.2.3 SAR Result of WCDMA Band V	68
8.2.4 SAR Result of LTE Band 2	69
8.2.5 SAR Result of LTE Band 5	72
8.2.6 SAR Result of LTE Band 7	73
8.2.7 SAR Result of LTE Band 12	75
8.2.8 SAR Result of LTE Band 14	76
8.2.9 SAR Result of LTE Band 30	77
8.2.10 SAR Result of LTE Band 66	80
8.2.11 SAR Result of 5G NR n2	84
8.2.12 SAR Result of 5G NR n5	88
8.2.13 SAR Result of 5G NR n30	89
8.2.14 SAR Result of 5G NR n66	91
8.2.15 SAR Result of 5G NR n77 (3450-3550 MHz)	94
8.2.16 SAR Result of 5G NR n77 (3700-3980MHz)	96
8.2.17 SAR Result of WIFI 2.4G	98
8.2.18 SAR Result of WIFI 5G	99
8.2.19 SAR Result of BT	101
8.2.20 SAR Result of NFC	102
8.3 Multiple Transmitter Evaluation	103
8.3.1 Simultaneous SAR test evaluation	103
8.3.2 Simultaneous Transmission SAR Summation Scenario	104
9 Equipment list	121
10 Calibration certificate	123
11 Photographs	123
Appendix A: Detailed System Check Results	123
Appendix B: Detailed Test Results	123
Appendix C: Calibration certificate	123
Appendix D: Photographs	123
Appendix E: Conducted RF Output Power	123



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032311

Rev.: 01

Page: 6 of 123

1 General Information

1.1 Details of Client

Applicant:	COOSEA GROUP (HK) COMPANY LIMITED
Address:	UNIT 5-6 16/F MULTIFIELD PLAZA 3-7A PRAT AVENUE TSIMSHATSUI KL
Manufacturer:	COOSEA GROUP (HK) COMPANY LIMITED
Address:	UNIT 5-6 16/F MULTIFIELD PLAZA 3-7A PRAT AVENUE TSIMSHATSUI KL

1.2 Test Location

Company:	SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.
Address:	South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone
Post code:	215000
Test Engineer:	Leon Xu

1.3 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **A2LA (Certificate No. 6336.01)**

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 6336.01.

- **Innovation, Science and Economic Development Canada**

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. has been recognized by ISED as an accredited testing laboratory.

CAB identifier: CN0120.

IC#: 27594.

- **FCC –Designation Number: CN1312**

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. has been recognized as an accredited testing laboratory.

Designation Number: CN1312.

Test Firm Registration Number: 0031225543

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032311

Rev.: 01

Page: 7 of 123

1.4 General Description of EUT

Device Type:	portable device		
Exposure Category:	uncontrolled environment / general population		
Product Name:	Smart Phone		
Model No.(EUT):	SN512A/SN512C		
Product Phase:	Production Unit		
Hardware Version:	1.0		
Software Version:	SN512AA10008		
IMEI:	357772740007318/357772740007326 357772740004273/357772740004281		
Device Operating Configurations:			
Modulation Mode:	WCDMA: QPSK,16QAM; LTE: QPSK,16QAM,64QAM,256QAM; 5G NR: DFT-s-OFDM (QPSK, 16QAM, 64QAM, 256QAM), CP-OFDM (QPSK, 16QAM, 64QAM, 256QAM) WIFI: DSSS, OFDM; BT: GFSK, $\pi/4$ DQPSK,8DPSK NFC: ASK		
HSDPA UE Category:	24	HSUPA UE Category	7
DC-HSDPA UE Category:	24		
Power Class	3, tested with power control “all 1”(WCDMA Band)		
	3, tested with power control Max Power(LTE Band)		
Frequency Bands:	Band	Tx (MHz)	Rx (MHz)
	WCDMA Band II	1850 - 1910	1930 - 1990
	WCDMA Band IV	1710 - 1755	2110 - 2155
	WCDMA Band V	824 - 849	869 - 894
	LTE Band 2	1850 - 1910	1930 - 1990
	LTE Band 4	1710 - 1755	2110 - 2155
	LTE Band 5	824 - 849	869 - 894
	LTE Band 7	2500 - 2570	2620 - 2690
	LTE Band 12	699 - 716	729 - 746
	LTE Band 14	788 - 798	758 - 768
	LTE Band 17	704 - 716	734 - 746
	LTE Band 30	2305 - 2315	2350 - 2360
	LTE Band 66	1710 - 1780	2110 - 2200
	NR Band n2	1850 - 1910	1930 - 1990
	NR Band n5	824 - 849	869 - 894
	NR Band n30	2305 - 2315	2350 - 2360
	NR Band n66	1710 - 1780	2110 - 2200
	NR Band n77	3450-3550	3450-3550
		3700-3980	3700-3980
	Bluetooth	2400 - 2483.5	2400 - 2483.5
	Wi-Fi 2.4G	2402 - 2462	2402 - 2462
	Wi-Fi 5G	5150 - 5250	5150 - 5250
		5250 - 5350	5250 - 5350
		5470 - 5725	5470 - 5725
		5725 - 5850	5725 - 5850



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032311
Rev.: 01
Page: 8 of 123

	NFC	13.56MHz	13.56MHz
RF Cable:	☒ Provided by the applicant ☐ Provided by the laboratory		
Battery Information:	Model:	BL-A97CT	
	Normal Voltage:	3.87V	
	Rated capacity:	4900mAh	
	Manufacturer:	Shenzhen Aerospace Electronic Co.,Ltd.	
Note: *Since the above data and/or information is provided by the client relevant results or conclusions of this report are only made for these data and/or information, SGS is not responsible for the authenticity, integrity and results of the data and information and/or the validity of the conclusion. Remark: 1. As above information is provided and confirmed by the applicant. SGS is not liable to the accuracy, suitability, reliability or/and integrity of the information. 2. The two models named SN512A, SN512C are the same product except that their model names are different for different market segments.			



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032311

Rev.: 01

Page: 9 of 123

1.4.1 DUT Antenna Locations (Back View)

The DUT Antenna Locations can be referred to Appendix D

Ant	Band:
Ant0	WCDMA: B5 LTE: B5/12/14/17 5G NR: N5
Ant1	LTE: B2/30/66 5G NR: N2/66
Ant3	LTE: B2/4/7/30/66 5G NR: N2/30/66
Ant4	5G NR: N77
Ant5	WIFI2.4G,WIFI5G,Bluetooth
Ant8	NFC

Note:

- 1) The test device is a smart phone. The overall diagonal dimension of this device is 181.4 mm. Per KDB 648474 D04, because the diagonal distance of this device is ≥ 160 mm, so it is a phablet.

According to the distance between 5G NR/LTE/WCDMA/WIFI/BT antennas and the sides of the EUT we can draw the conclusion that:

EUT Sides for SAR Testing							
Mode	Exposure Condition	Front	Back	Left	Right	Top	Bottom
Ant 0	Hotspot/Product specific 10g SAR	Yes	Yes	Yes	Yes	No	Yes
Ant 1	Hotspot/Product specific 10g SAR	Yes	Yes	Yes	No	No	Yes
Ant 3	Hotspot/Product specific 10g SAR	Yes	Yes	Yes	No	Yes	No
Ant 4	Hotspot/Product specific 10g SAR	Yes	Yes	Yes	No	Yes	No
Ant 5	Hotspot/Product specific 10g SAR	Yes	Yes	No	Yes	Yes	No
Ant 8	Hotspot/Product specific 10g SAR	Yes	Yes	Yes	Yes	Yes	Yes

Note:

- 1) When the antenna-to-edge distance is greater than 2.5cm, such position does not need to be tested.



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032311

Rev.: 01

Page: 10 of 123

1.4.2 Power reduction specification

This device uses a single fixed level of power reduction through static table look-up for SAR compliance and it is triggered by a single event or operation

- 1) A fixed level power reduction is applied for some frequency bands when hotspot mode becomes active. When the hotspot is disabled, the power value will be recovered.
- 2) A fixed level power reduction is applied for some frequency bands when simultaneously transmitting with the other antennas in certain simultaneous transmission conditions. The standalone SAR compliance still uses the standalone SAR results tested at the maximum output power level without any power reduction
- 3) A fixed level power reduction is applied for some frequency bands when handset operate "held to the ear" condition, the power reduction triggered by audio receiver detection. The audio receiver detection is used to determine head or body scenario.
- 4) The proximity sensor is used to indicate when the device is held close to a user's body exposure condition. It utilizes the proximity sensor to reduce the output power in specific wireless and operating modes of main antenna to ensure SAR compliance (Refer to section 5.4 for detailed proximity Sensor information and validation data per KDB 616217)

The detailed power reduction information can be referred to Appendix E.



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032311

Rev.: 01

Page: 11 of 123

1.5 Test Specification

Identity	Document Title
FCC 47CFR §2.1093	Radiofrequency Radiation Exposure Evaluation: Portable Devices
ANSI/IEEE C95.1-1992	IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz – 300 GHz.
IEEE 1528-2013	Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques
IEC/IEEE 62209-1528:2020	Measurement procedure for the assessment of specific absorption rate of human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices – Part 1528: Human models, instrumentation, and procedures (Frequency range of 4 MHz to 10 GHz)
KDB 941225 D01	3G SAR Measurement Procedures v03r01
KDB 941225 D05	SAR for LTE Devices v02r05
KDB 941225 D05A	LTE Rel.10 KDB Inquiry Sheet v01r02
KDB 941225 D06	Hotspot Mode SAR v02r01
KDB 248227 D01	SAR Guidance for IEEE 802.11 Wi-Fi SAR v02r02
KDB 648474 D04	Handset SAR v01r03
KDB 447498 D04	General RF Exposure Guidance v01
KDB 865664 D01	SAR Measurement 100 MHz to 6 GHz v01r04
KDB 865664 D02	RF Exposure Reporting v01r02
KDB 690783 D01	SAR Listings on Grants v01r03
KDB 616217 D04	SAR for laptop and tablets v01r02



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032311

Rev.: 01

Page: 12 of 123

1.6 RF exposure limits

Human Exposure	Uncontrolled Environment General Population	Controlled Environment Occupational
Spatial Peak SAR* (Brain*Trunk)	1.60 mW/g	8.00 mW/g
Spatial Average SAR** (Whole Body)	0.08 mW/g	0.40 mW/g
Spatial Peak SAR*** (Hands/Feet/Ankle/Wrist)	4.00 mW/g	20.00 mW/g

Notes:

* The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time

** The Spatial Average value of the SAR averaged over the whole body.

*** The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation.)



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032311
Rev.: 01
Page: 13 of 123

2 Laboratory Environment

Temperature	Min. = 18°C, Max. = 25 °C
Relative humidity	Min. = 30%, Max. = 70%
Ambient noise is checked and found very low and in compliance with requirement of standards.	
Reflection of surrounding objects is minimized and in compliance with requirement of standards.	

Table 1: The Ambient Conditions

3 SAR Measurements System Configuration

3.1 The SAR Measurement System

This SAR Measurement System uses a Computer-controlled 3-D stepper motor system (SPEAG DASY professional system). A E-field probe is used to determine the internal electric fields. The SAR can be obtained from the equation $SAR = \sigma (|E|)^2 / \rho$ where σ and ρ are the conductivity and mass density of the tissue-Simulate.


The DASY system for performing compliance tests consists of the following items:

A standard high precision 6-axis robot (Stabile RX family) with controller, teach pendant and software. An arm extension for accommodation the data acquisition electronics (DAE).

A dosimetric probe, i.e., an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.

A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.

The Electro-optical converter (EOC) performs the conversion between optical and electrical of the signals for the digital communication to DAE and for the analog signal from the optical surface detection. The EOC is connected to the measurement server.

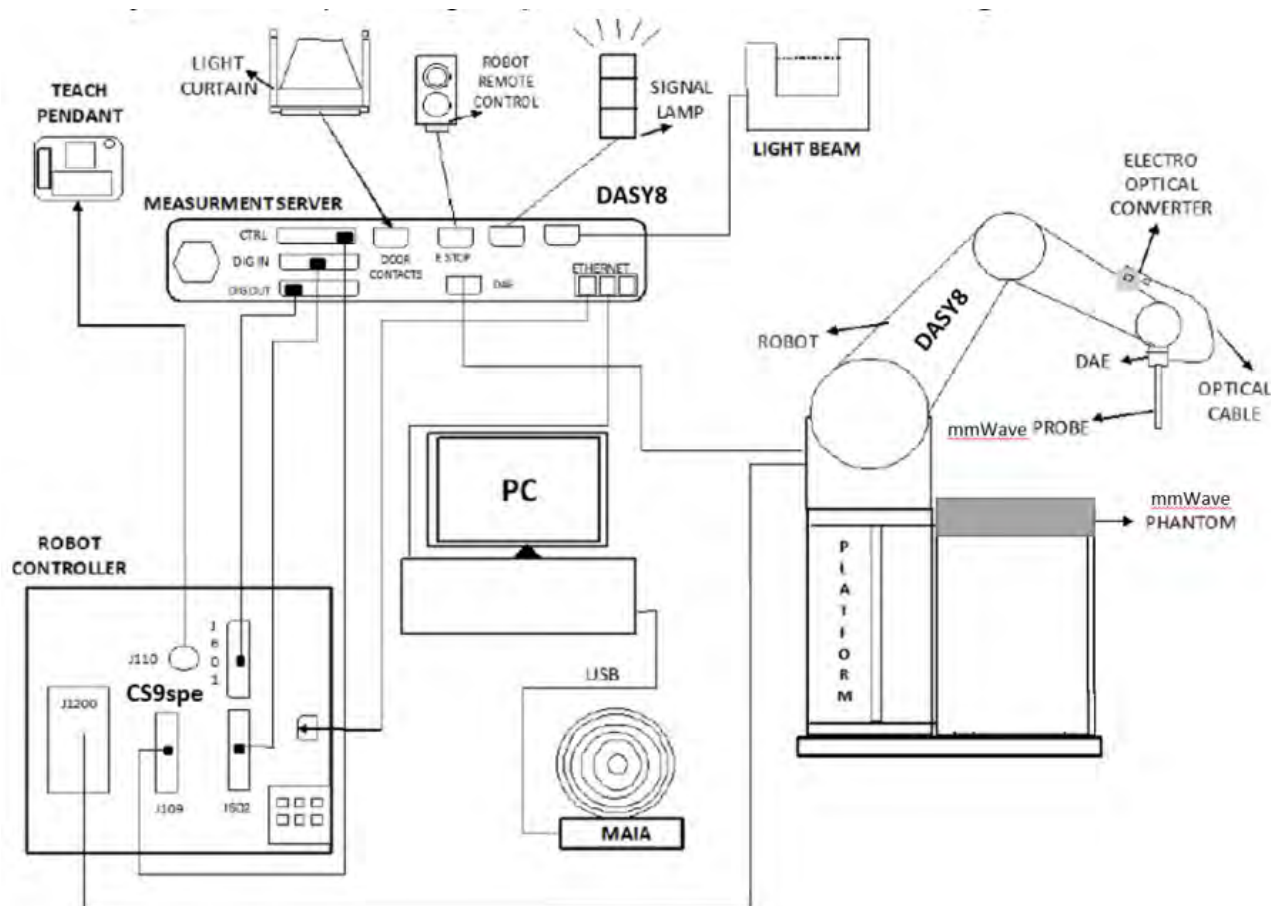

F-1. SAR Measurement System Configuration

- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- A probe alignment unit which improves the (absolute) accuracy of the probe positioning.
- A computer operating Windows system.
- DASY software.
- Remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- The SAM twin phantom enabling testing left-hand, right-hand and Body Worn usage.
- The device holder for handheld mobile phones.
- Tissue simulating liquid mixed according to the given recipes.
- Validation dipole kits allowing to validating the proper functioning of the system.

3.2 Isotropic E-field Probe EX3DV4

	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
Calibration	ISO/IEC 17025 calibration service available.
Frequency	10 MHz to > 6 GHz Linearity: ± 0.2 dB (30 MHz to 6 GHz)
Directivity	± 0.3 dB in TSL (rotation around probe axis) ± 0.5 dB in TSL (rotation normal to probe axis)
Dynamic Range	10 μW/g to > 100 mW/g Linearity: ± 0.2 dB (noise: typically < 1 μW/g)
Dimensions	Overall length: 337 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm
Application	High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields); the only probe that enables compliance testing for frequencies up to 6 GHz with precision of better 30%.
Compatibility	DASY52 SAR and higher, EASY4/MRI

3.3 Data Acquisition Electronics (DAE)

Model	DAE	
Construction	Signal amplifier, multiplexer, A/D converter and control logic. Serial optical link for communication with DASY4/5 embedded system (fully remote controlled). Two step probe touch detector for mechanical surface detection and emergency robot stop.	
Measurement Range	-100 to +300 mV (16 bit resolution and two range settings: 4mV,400mV)	
Input Offset Voltage	< 5μV (with auto zero)	
Input Bias Current	< 50 f A	
Dimensions	60 x 60 x 68 mm	

3.4 SAM Twin Phantom

Material	Vinylester, glass fiber reinforced (VE-GF)	
Liquid Compatibility	Compatible with all SPEAG tissue simulating liquids (incl. DGBE type)	
Shell Thickness	2 ± 0.2 mm (6 ± 0.2 mm at ear point)	
Dimensions (incl. Wooden Support)	Length: 1000 mm Width: 500 mm Height: adjustable feet	
Filling Volume	approx. 25 liters	
Wooden Support	SPEAG standard phantom table	

The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in IEEE 1528. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by teaching three points with the robot.

Twin SAM V5.0 has the same shell geometry and is manufactured from the same material as Twin SAM V4.0, but has reinforced top structure.

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032311

Rev.: 01

Page: 18 of 123

3.5 ELI Phantom

Material	Vinylester, glass fiber reinforced (VE-GF)	
Liquid Compatibility	Compatible with all SPEAG tissue simulating liquids (incl. DGBE type)	
Shell Thickness	2.0 ± 0.2 mm (bottom plate)	
Dimensions	Major axis: 600 mm Minor axis: 400 mm	
Filling Volume	approx. 30 liters	
Wooden Support	SPEAG standard phantom table	

Phantom for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI is fully compatible with the IEEE 1528 standard and all known tissue simulating liquids. ELI has been optimized regarding its performance and can be integrated into our standard phantom tables. A cover prevents evaporation of the liquid. Reference markings on the phantom allow installation of the complete setup, including all predefined phantom positions and measurement grids, by teaching three points. The phantom is compatible with all SPEAG dosimetric probes and dipoles. ELI V5.0 has the same shell geometry and is manufactured from the same material as ELI4, but has reinforced top structure.

3.6 Device Holder for Transmitters



F-2. Device Holder for Transmitters

- The DASY device holder is designed to cope with different positions given in the standard. It has two scales for the device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear reference points). The rotation centres for both scales are the ear reference point (ERP). Thus the device needs no repositioning when changing the angles.
- The DASY device holder has been made out of low-loss POM material having the following dielectric parameters: relative permittivity $\epsilon=3$ and loss tangent $\delta=0.02$. The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.

3.7 Measurement procedure

3.7.1 Scanning procedure

Step 1: Power reference measurement

The “reference” and “drift” measurements are located at the beginning and end of the batch process. They measure the field drift at one single point in the liquid over the complete procedure.

Step 2: Area scan

The SAR distribution at the exposed side of the head was measured at a distance of 4mm from the inner surface of the shell. The area covered the entire dimension of the head and the horizontal grid spacing was 15mm*15mm or 12mm*12mm or 10mm*10mm. Based on the area scan data, the area of the maximum absorption was determined by spline interpolation.

Step 3: Zoom scan

Around this point, a volume of 32mm*32mm*30mm ($f \leq 2\text{GHz}$), 30mm*30mm*30mm (f for 2-3GHz) and 24mm*24mm*22mm (f for 5-6GHz) was assessed by measuring 5x5x7 points ($f \leq 2\text{GHz}$), 7x7x7 points (f for 2-3GHz) and 7x7x12 points (f for 5-6GHz). On this basis of this data set, the spatial peak SAR value was evaluated with the following procedure:

The data at the surface was extrapolated, since the centre of the dipoles is 2.0mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 1.2mm. (This can be variable. Refer to the probe specification). The extrapolation was based on a least square algorithm. A polynomial of the fourth order was calculated through the points in z-axes. This polynomial was then used to evaluate the points between the surface and the probe tip. The maximum interpolated value was searched with a straight-forward algorithm. Around this maximum the SAR values averaged over the spatial volumes (1g or 10g) were computed using the 3D-Spline interpolation algorithm. The volume was integrated with the trapezoidal algorithm. One thousand points were interpolated to calculate the average. All neighbouring volumes were evaluated until no neighboring volume with a higher average value was found.

The area and zoom scan resolutions specified in the table below must be applied to the SAR measurements. Probe boundary effect error compensation is required for measurements with the probe tip closer than half a probe tip diameter to the phantom surface. Both the probe tip diameter and sensor offset distance must satisfy measurement protocols; to ensure probe boundary effect errors are minimized and the higher fields closest to the phantom surface can be correctly measured and extrapolated to the phantom surface for computing 1-g SAR. Tolerances of the post-processing algorithms must be verified by the test laboratory for the scan resolutions used in the SAR measurements, according to the reference distribution functions specified in IEEE Std. 1528-2013.

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032311

Rev.: 01

Page: 21 of 123

			≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface			5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location			$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area}			≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
			When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	
Maximum zoom scan spatial resolution: Δx_{Zoom} , Δy_{Zoom}			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{Zoom}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{Zoom}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm

Step 4: Power reference measurement (drift)

The Power Drift Measurement job measures the field at the same location as the most recent power reference measurement job within the same procedure, and with the same settings. The indicated drift is mainly the variation of the DUT's output power and should vary max ± 5 %.

3.7.2 Data Storage

The DASY software stores the acquired data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files with the extension “.DAE4”. The software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of incorrect parameter settings. For example, if a measurement has been performed with a wrong crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be re-evaluated. The measured data can be visualized or exported in different units or formats, depending on the selected probe type ([V/m], [A/m], [°C], [m W/g], [m W/cm²], [dBrel], etc.). Some of these units are not available in certain situations or show meaningless results, e.g., a SAR output in a lossless media will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

3.7.3 Data Evaluation by SEMCAD

The SEMCAD software automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe parameters:	- Sensitivity	Normi, ai0, ai1, ai2
- Conversion factor	ConvFi	
- Diode compression point	Dcpi	
Device parameters:	- Frequency	f
- Crest factor	cf	
Media parameters:	- Conductivity	ε
- Density	ρ	

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY components. In the direct measuring mode of the multimeter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics.

If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot cf / dcpi$$

With V_i = compensated signal of channel i ($i = x, y, z$)

U_i = input signal of channel i ($i = x, y, z$)

cf = crest factor of exciting field (DASY parameter)

dcpi = diode compression point (DASY parameter)

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032311

Rev.: 01

Page: 23 of 123

From the compensated input signals the primary field data for each channel can be evaluated:

E-field probes:

$$E_i = (V_i / \text{Norm}_i \cdot \text{ConvF})^{1/2}$$

H-field probes:

$$H_i = (V_i)^{1/2} \cdot (a_{i0} + a_{i1}f + a_{i2}f^2) / f$$

With V_i = compensated signal of channel i ($i = x, y, z$)

Norm_i = sensor sensitivity of channel i ($i = x, y, z$)

[mV/(V/m)²] for E-field Probes

ConvF = sensitivity enhancement in solution

a_{ij} = sensor sensitivity factors for H-field probes

f = carrier frequency [GHz]

E_i = electric field strength of channel i in V/m

H_i = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{tot} = (E_x^2 + E_y^2 + E_z^2)^{1/2}$$

The primary field data are used to calculate the derived field units.

$$SAR = (E_{tot}^2 \cdot \sigma) / (\epsilon \cdot 1000)$$

with SAR = local specific absorption rate in mW/g

E_{tot} = total field strength in V/m

σ = conductivity in [mho/m] or [Siemens/m]

ϵ = equivalent tissue density in g/cm³

Note that the density is normally set to 1 (or 1.06), to account for actual brain density rather than the density of the simulation liquid. The power flow density is calculated assuming the excitation field to be a free space field.

$$P_{pwe} = E_{tot}^2 / 3770 \text{ or } P_{pwe} = H_{tot}^2 \cdot 37.7$$

with P_{pwe} = equivalent power density of a plane wave in mW/cm²

E_{tot} = total electric field strength in V/m

H_{tot} = total magnetic field strength in A/m



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032311

Rev.: 01

Page: 24 of 123

4 SAR measurement variability and uncertainty

4.1 SAR measurement variability

Per KDB 865664 D01 SAR measurement 100 MHz to 6 GHz v01r04, SAR measurement variability must be assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. The additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg ($\sim 10\%$ from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

The same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.

4.2 SAR measurement uncertainty

Per KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg, the extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. The equivalent ratio (1.5/1.6) is applied to extremity and occupational exposure conditions.

5 Description of Test Position

5.1 Head Exposure Condition

5.1.1 SAM Phantom Shape




F-3. Front, back, and side views of SAM (model for the phantom shell). Full-head model is for illustration purposes only—procedures in this recommended practice are intended primarily for the phantom setup.


Note: The centre strip including the nose region has a different thickness tolerance.



F-4. Sagittally bisected phantom with extended perimeter (shown placed on its side as used for SAR measurements)

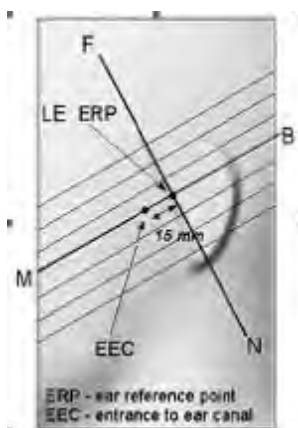


F-5. Close-up side view of phantom, showing the ear region, N-F and B-M lines, and seven cross-sectional plane locations

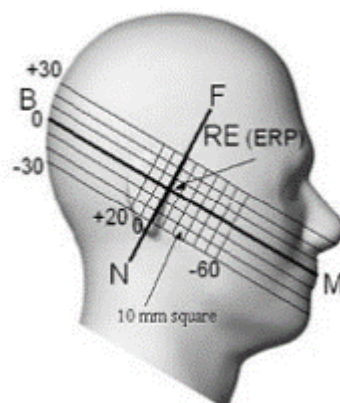


F-6. Side view of the phantom showing relevant markings and seven cross-sectional plane locations

5.1.2 EUT constructions

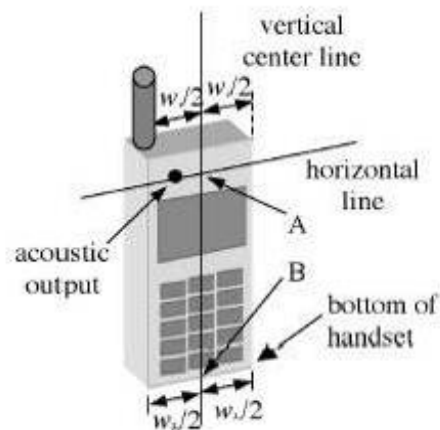

F-7. Handset vertical and horizontal reference lines—"fixed case"

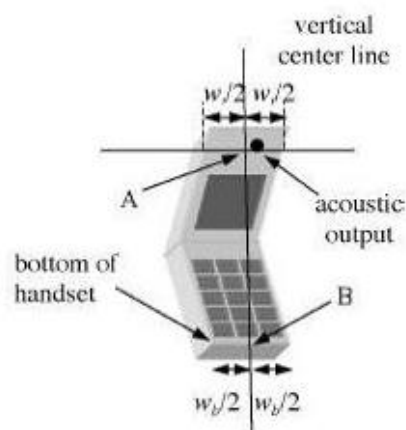

F-8. Handset vertical and horizontal reference lines—"clam-shell case"

5.1.3 Definition of the "cheek" position

a) Position the device with the vertical centre line of the body of the device and the horizontal line crossing the centre of the ear piece in a plane parallel to the sagittal plane of the phantom ("initial position"). While maintaining the device in this plane, align the vertical centre line with the reference plane containing the three ear and mouth reference points (M, RE and LE) and align the centre of the ear piece with the line RE-LE.

b) Translate the mobile phone box towards the phantom with the ear piece aligned with the line LE-RE until telephone touches the ear. While maintaining the device in the reference plane and maintaining the phone contact with the ear, move the bottom of the box until any point on the front side is in contact with the cheek of the phantom or until contact with the ear is lost.

5.1.4 Definition of the "tilted" position

a) Position the device in the "cheek" position described above;


b) While maintaining the device in the reference plane described above and pivoting against the ear, move it outward away from the mouth by an angle of 15 degrees or until contact with the ear is lost.

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250400032311

Rev.: 01

Page: 27 of 123

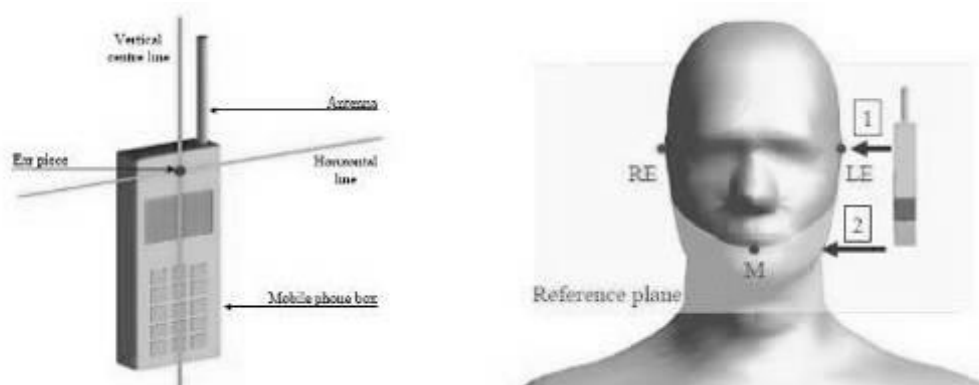

F-9. Definition of the reference lines and points, on the phone and on the phantom and initial position

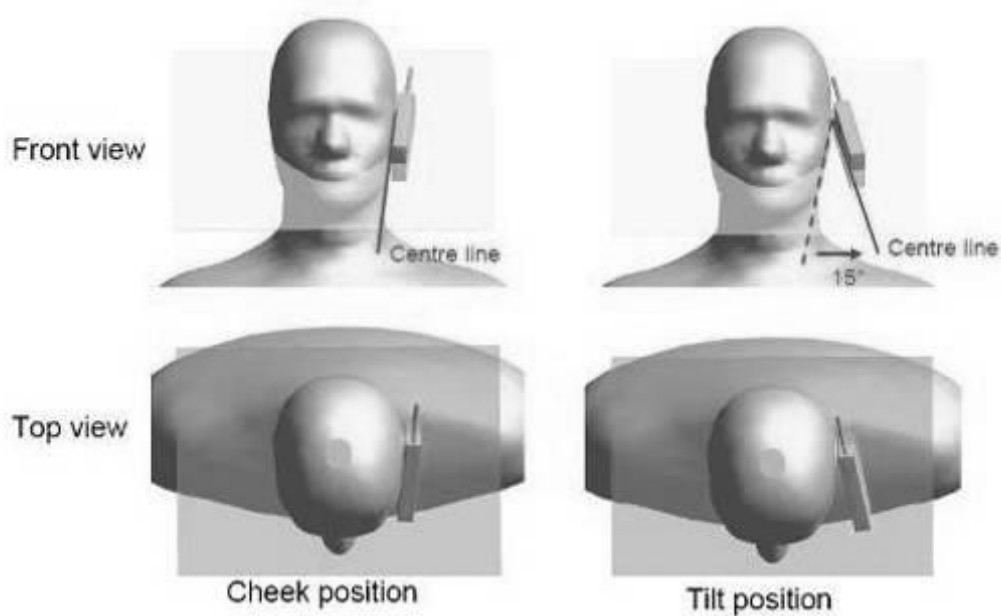

F-10. "Cheek" and "tilt" positions of the mobile phone on the left side

5.2 Body Exposure Condition


5.2.1 Body-worn accessory exposure conditions

Body-worn operating configurations should be tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in normal use configurations.

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration. Per FCC KDB Publication 648474 D04, Body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB Publication 447498 D04 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for a body-worn accessory, measured without a headset connected to the handset, is $> 1.2 \text{ W/kg}$, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

Accessories for Body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are tested with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-clip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

Body-worn accessories may not always be supplied or available as options for some devices intended to be authorized for body-worn use. In this case, a test configuration with a separation distance between the back of the device and the flat phantom is used. Test position spacing was documented. Transmitters that are designed to operate in front of a person's face, as in push-to-talk configurations, are tested for SAR compliance with the front of the device positioned to face the flat phantom in head fluid. For devices that are carried next to the body such as a shoulder, waist or chest-worn transmitters, SAR compliance is tested with the accessories, including headsets and microphones, attached to the device and positioned against a flat phantom in a normal use configuration.

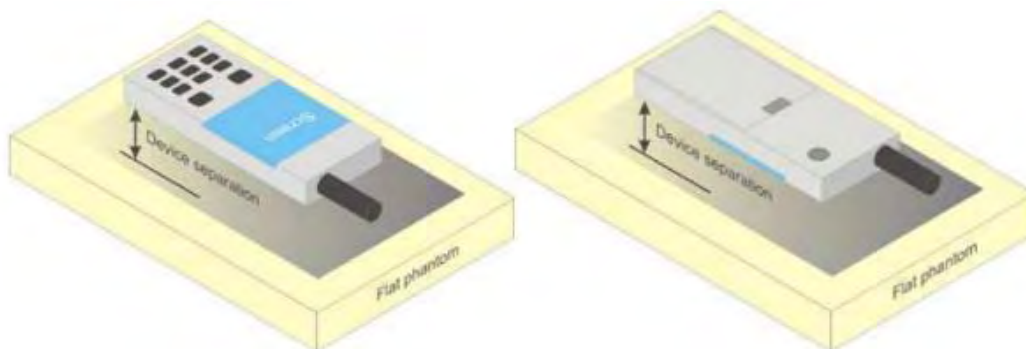

F-11. Test positions for body-worn devices.

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032311

Rev.: 01

Page: 29 of 123

5.2.2 Wireless Router exposure conditions

Some battery-operated handsets have the capability to transmit and receive user data through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06 where SAR test considerations for handsets ($L \times W \geq 9 \text{ cm} \times 5 \text{ cm}$) are based on a composite test separation distance of 10 mm from the front, back and edges of the device containing transmitting antennas within 2.5 cm of their edges, determined from general mixed use conditions for this type of devices. For devices with form factors smaller than 9 cm x 5 cm, a test separation distance of 5 mm is required.

5.3 Extremity exposure conditions


Per FCC KDB 648474 D04, for smart phones with a display diagonal dimension $> 15.0 \text{ cm}$ or an overall diagonal dimension $> 16.0 \text{ cm}$ that provide similar mobile web access and multimedia support found in mini-tablets or UMPC mini-tablets that support voice calls next to the ear, the device is marketed as "Phablet". The UMPC mini-tablet procedures must also be applied to test the SAR of all surfaces and edges with an antenna located at $\leq 25 \text{ mm}$ from that surface or edge, in direct contact with a flat phantom, for Product Specific 10-g SAR according to the body-equivalent tissue dielectric parameters in KDB 865664 to address interactive hand use exposure conditions. The UMPC mini-tablet 1-g SAR at 5 mm is not required. When hotspot mode applies, Product Specific 10-g SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR $> 1.2 \text{ W/kg}$; however, when power reduction applies to hotspot mode the measured SAR must be scaled to the maximum output power, including tolerance, allowed for phablet modes to compare with the 1.2 W/kg SAR test reduction threshold.

Due to the SAR result, only the WCDMA Band 2/4, LTE Band 2/30, n2/30/66/77, WIFI 5G, NFC frequency bands need to test with 0mm for the Product Specific 10-g SAR, the others are not required.

5.4 Proximity Sensor Triggering Test

Proximity sensor triggering distances:

The Proximity sensor triggering was applied to WWAN antenna. Proximity sensor triggering distance testing was performed according to the procedures outlined in KDB 616217 D04 section 6.2, and EUT moving further away from the flat phantom and EUT moving toward the flat phantom were both assessed.


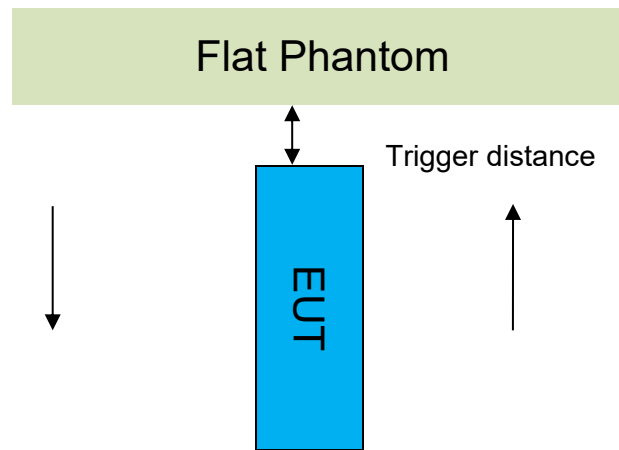


Proximity Sensor Triggering Distance(mm)				
Ant3				
Position	Front Side	Back Side	Left Side	Top Side
Minimum	11	14	5	15
Required SAR Test	10	13	4	14
Ant4				
Position	Back Side		Left Side	
Minimum	5		5	
Required SAR Test	4		4	

Note:

SAR tests with proximity sensor power reduction are only required for the sides of frequency bands in the table above. For the other sides or other frequency bands of the device, SAR is still tested at the maximum power level with sensor off.

● Ant 3 DUT Moving Toward(Trigger)the Phantom

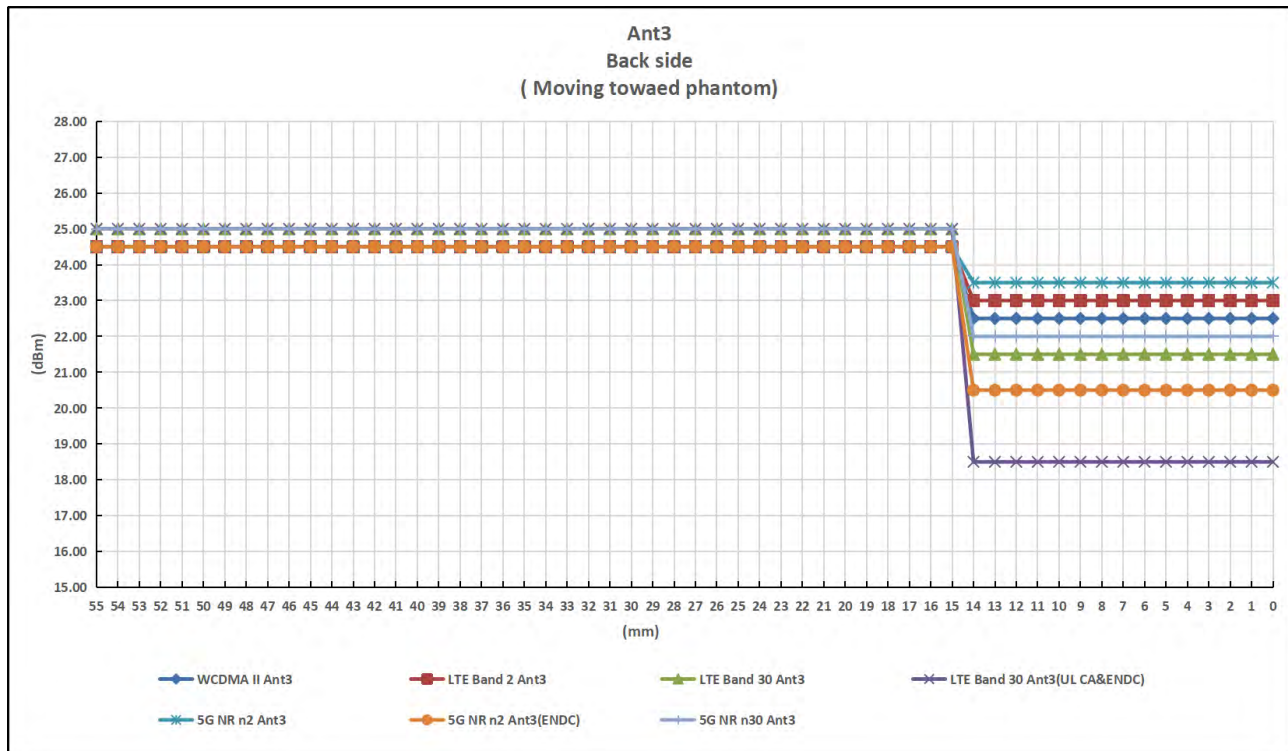
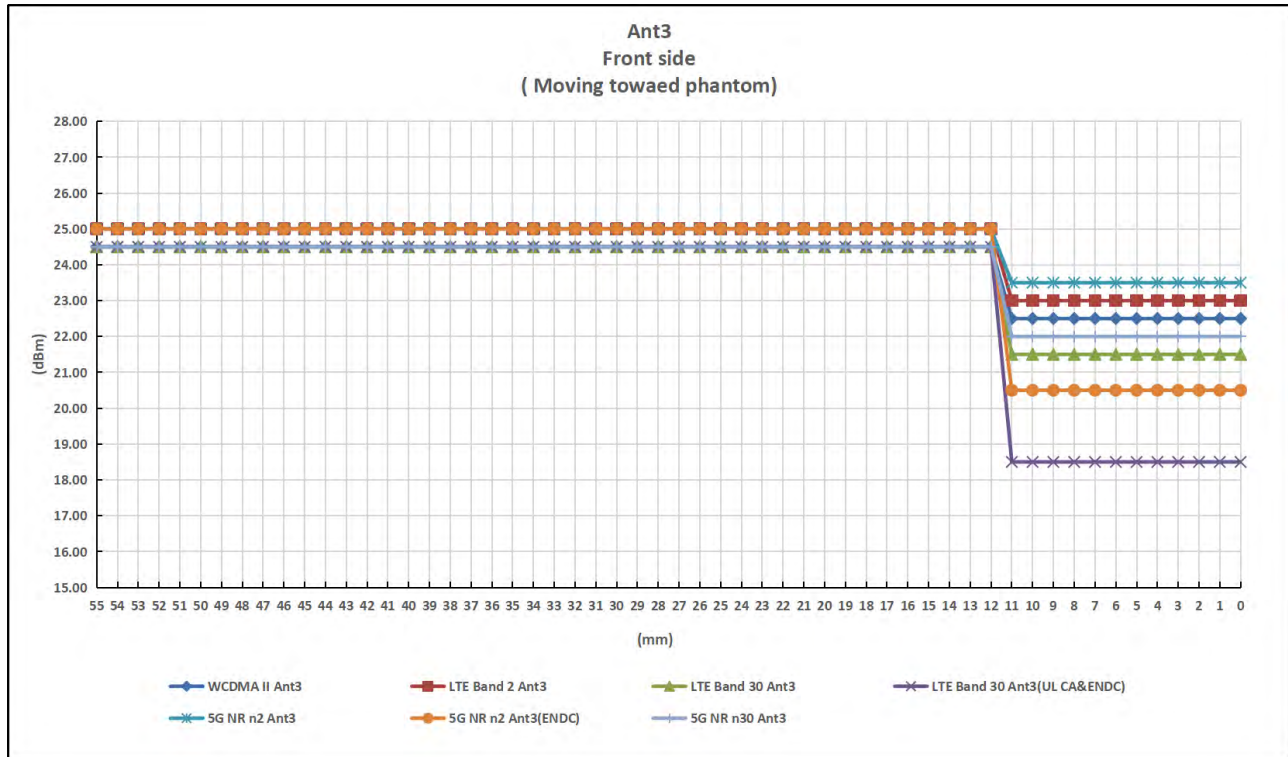


SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032311

Rev.: 01

Page: 32 of 123

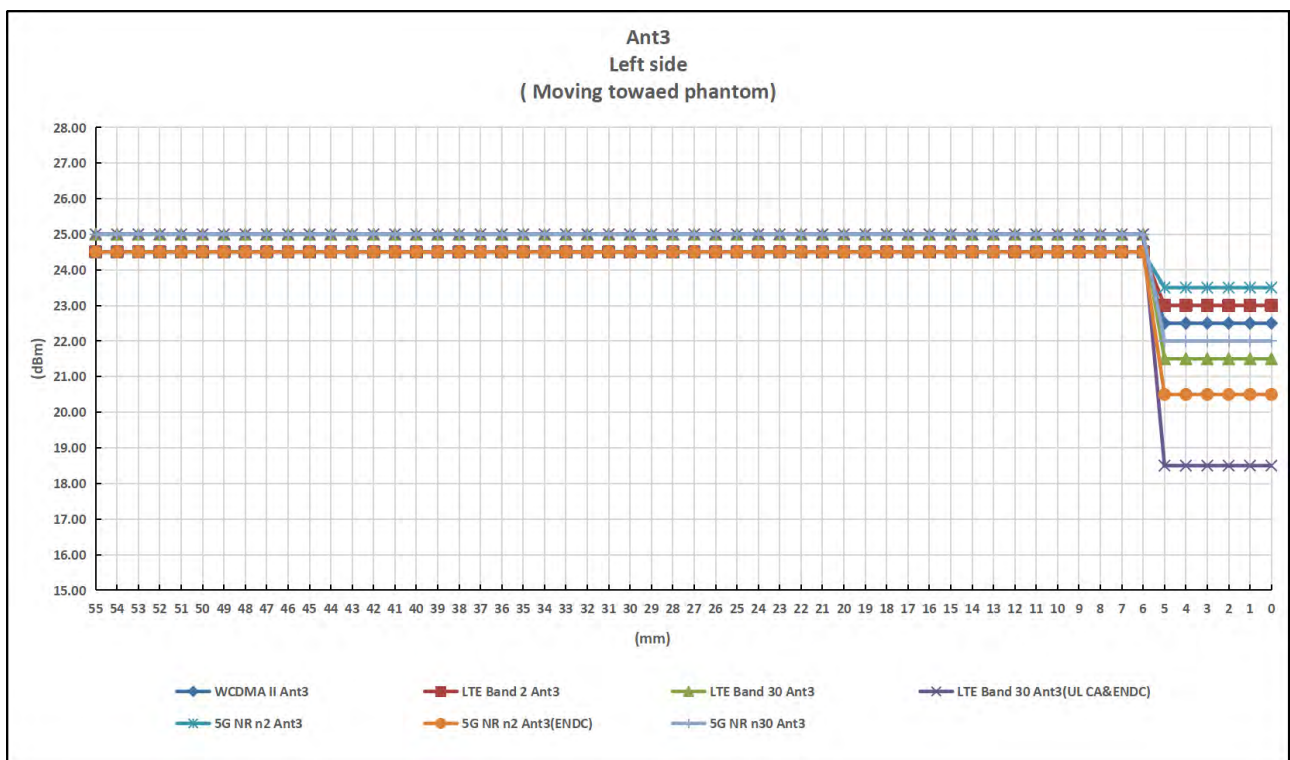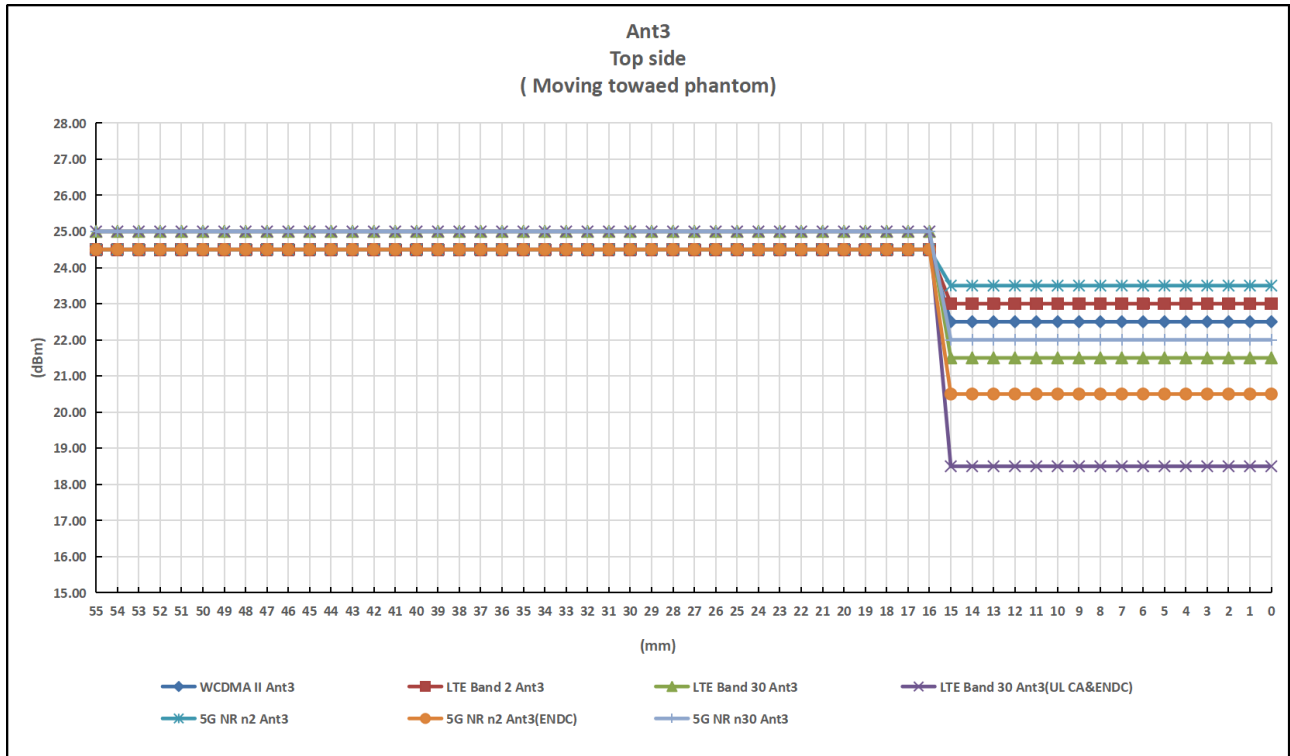



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032311

Rev.: 01

Page: 33 of 123

- Ant 3 DUT Moving Away(Release) from the Phantom

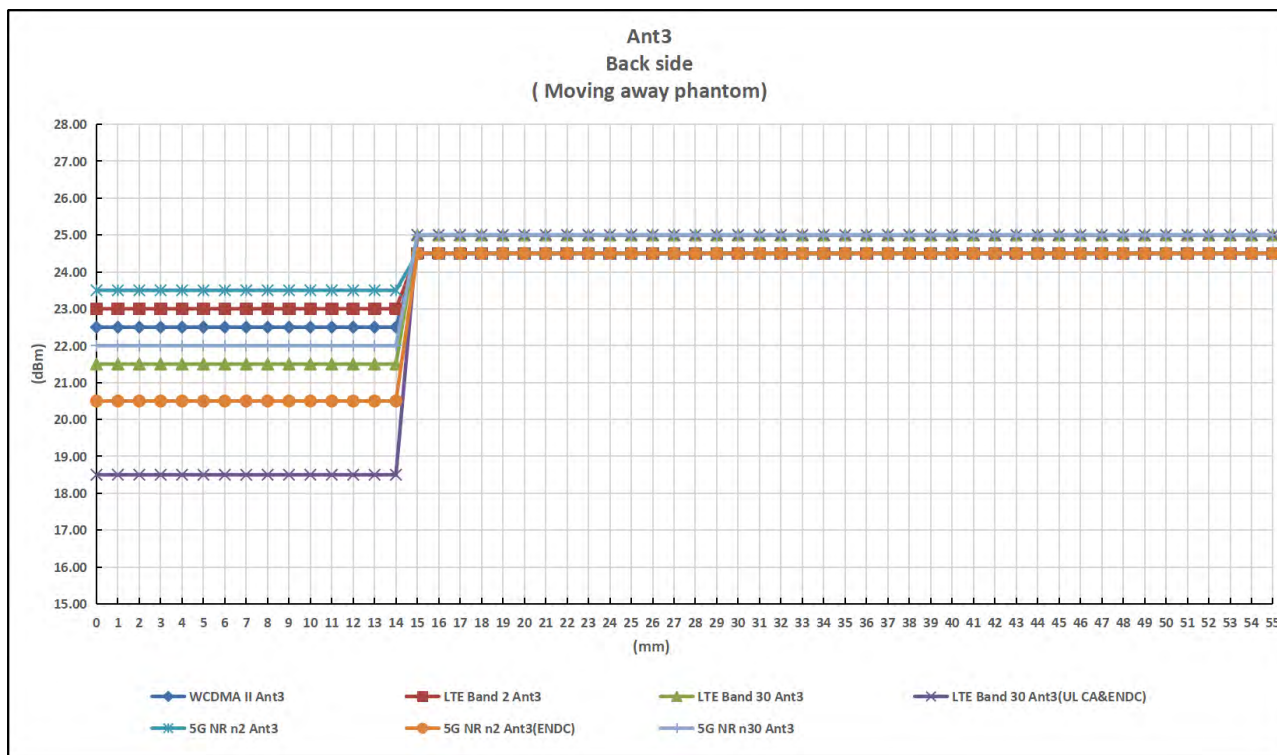
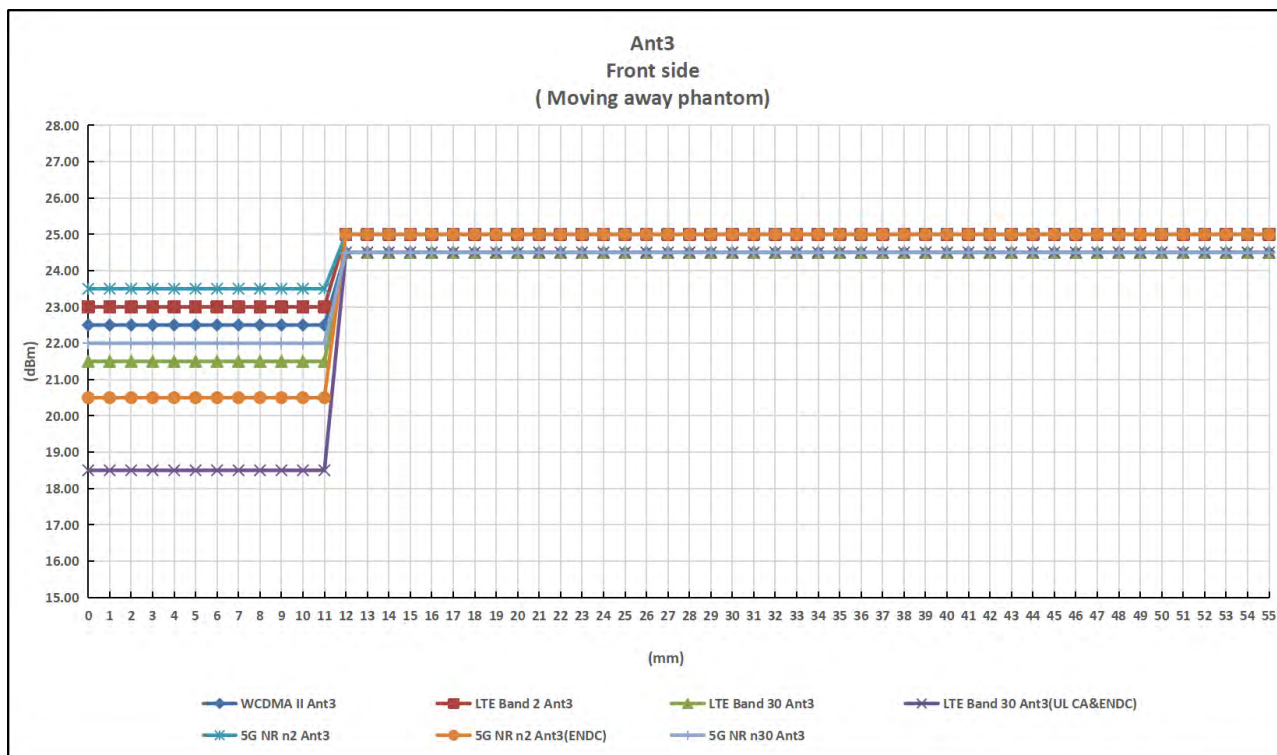


SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250400032311

Rev.: 01


Page: 34 of 123

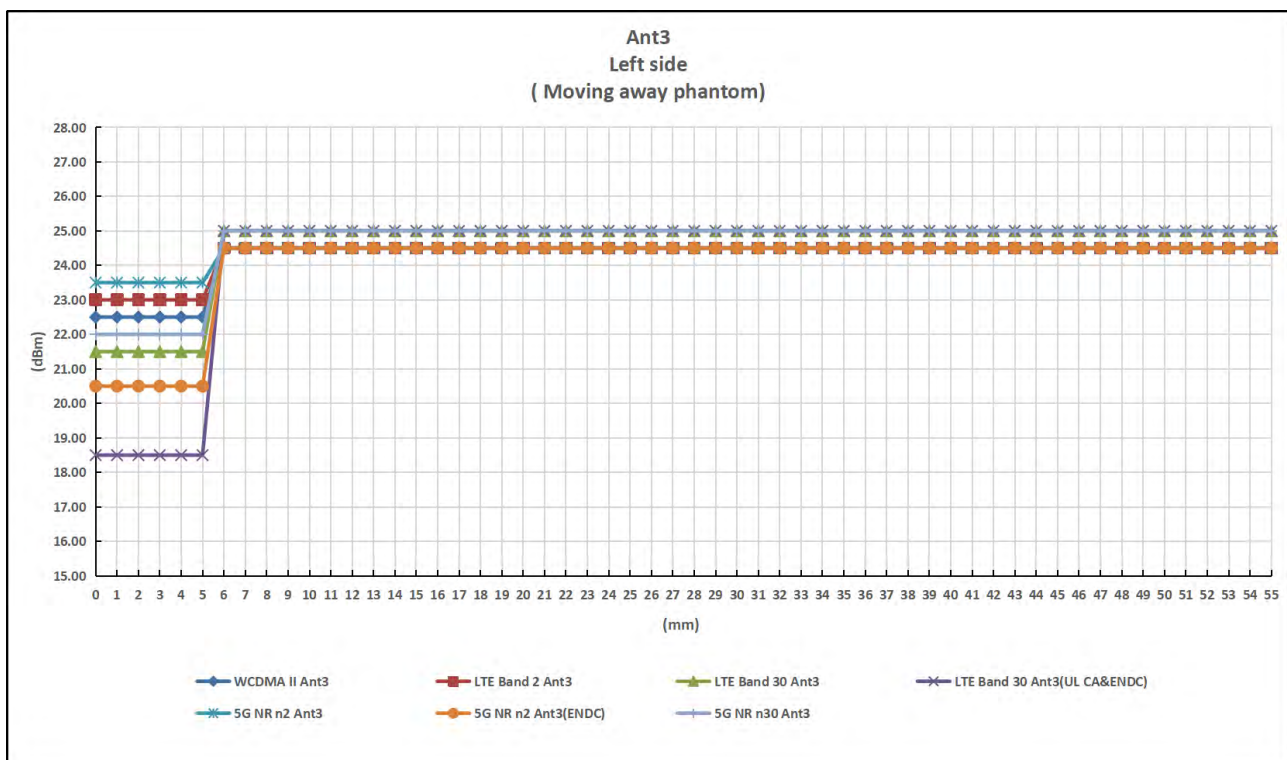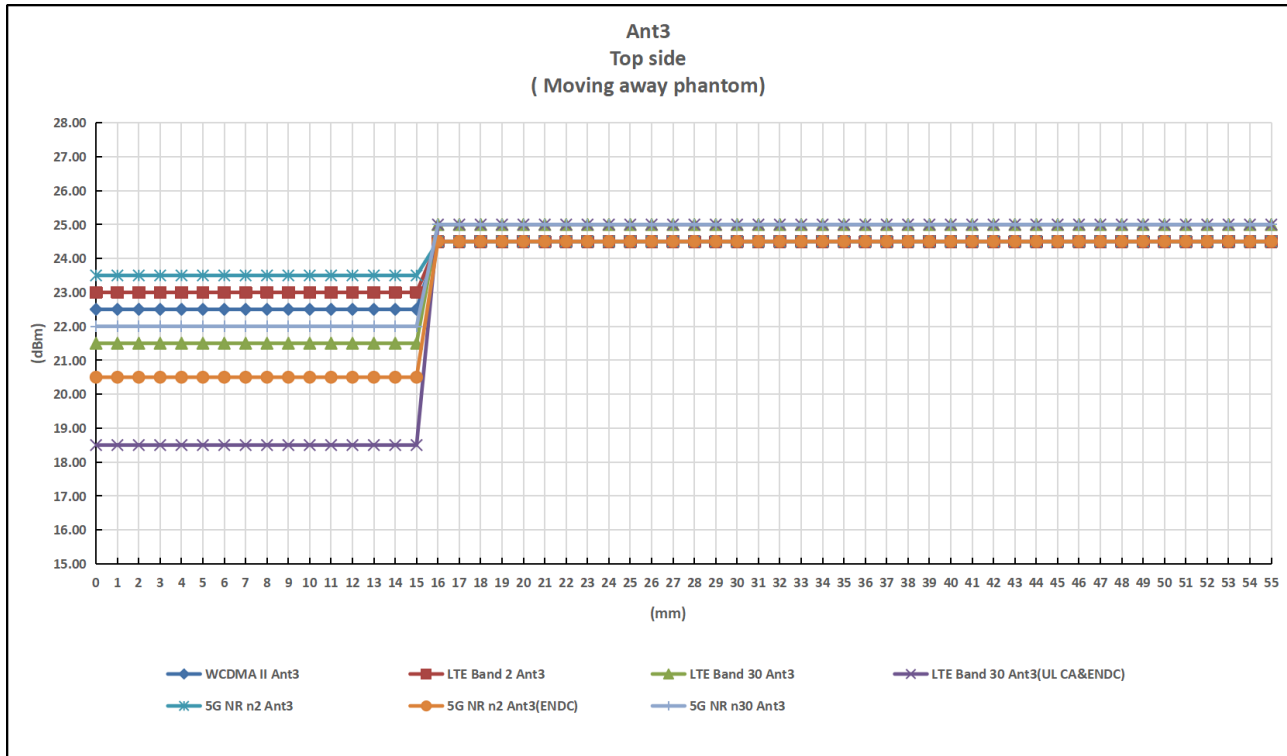

● Ant 4 DUT Moving Toward(Trigger)the Phantom

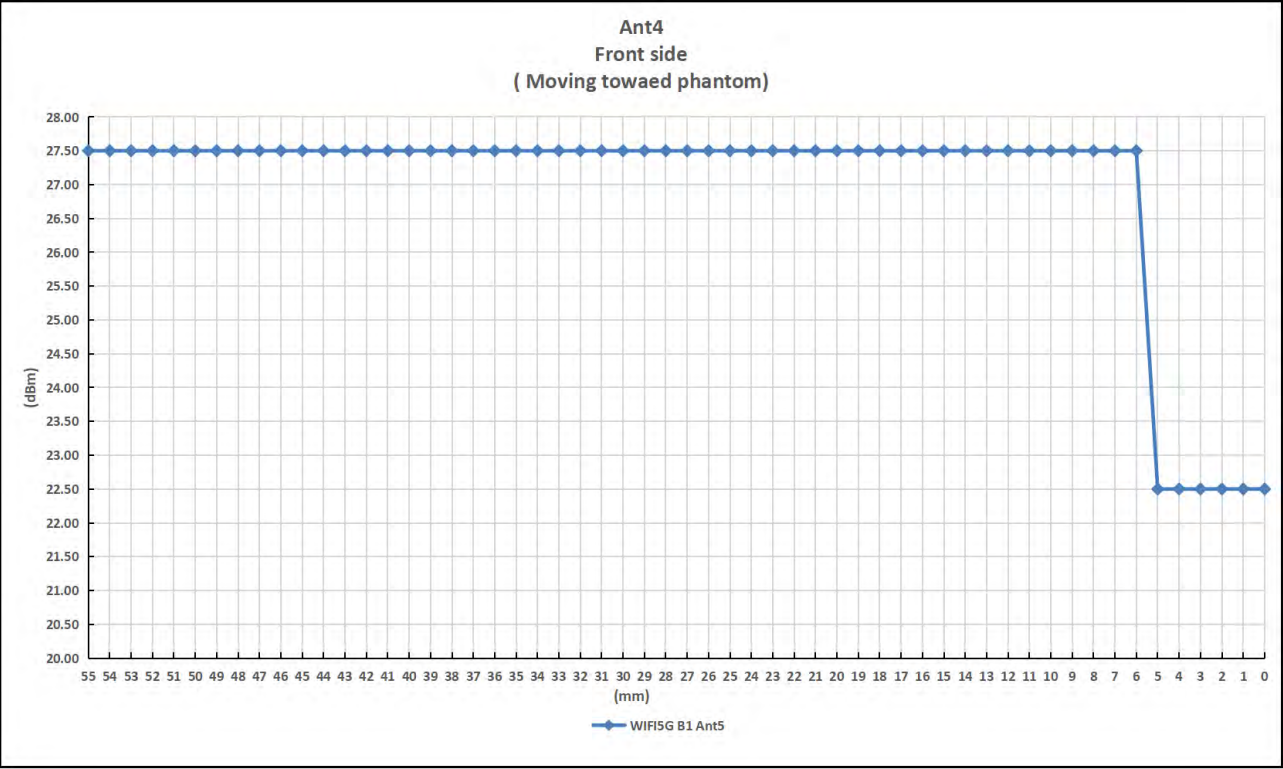

● Ant 4 DUT Moving Away(Release) from the Phantom

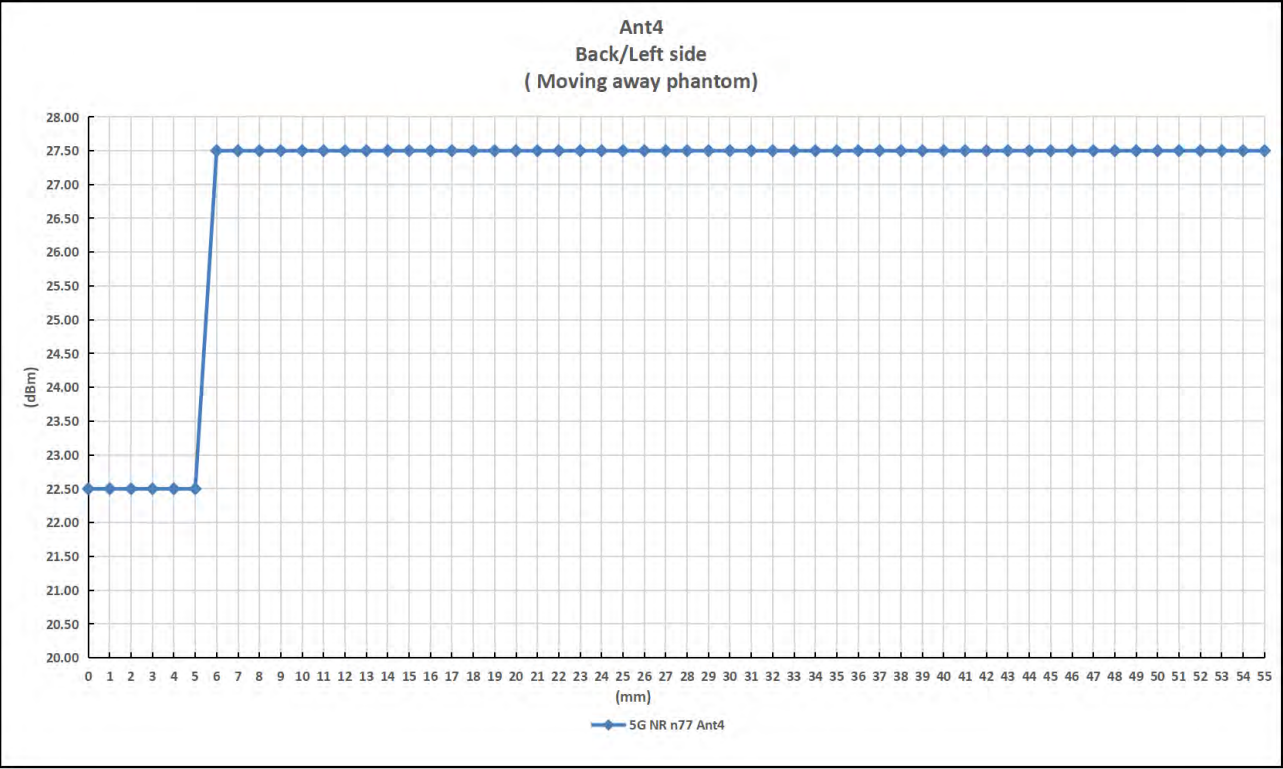



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032311

Rev.: 01

Page: 38 of 123

6 SAR System Verification Procedure

6.1 Tissue Simulate Liquid

6.1.1 Recipes for Tissue Simulate Liquid

The following tables give the recipes for tissue simulating liquids to be used in different frequency bands:

Ingredients (% by weight)	Frequency (MHz)				
	450	700-900	1750-2000	2300-2500	2500-2700
Water	38.56	40.30	55.24	55.00	54.92
Salt (NaCl)	3.95	1.38	0.31	0.2	0.23
Sucrose	56.32	57.90	0	0	0
HEC	0.98	0.24	0	0	0
Bactericide	0.19	0.18	0	0	0
Tween	0	0	44.45	44.80	44.85
Salt: 99+% Pure Sodium Chloride Sucrose: 98+% Pure Sucrose Water: De-ionized, 16 MΩ ⁺ resistivity HEC: Hydroxyethyl Cellulose Tween: Polyoxyethylene (20) sorbitan monolaurate					
HSL13MHz is composed of the following ingredients: Water: 50-90% Non-ionic detergents: 5-50% Nacl: 0-2% Preservative: 0.03-0.1% HSL5GHz is composed of the following ingredients: Water: 50-65% Mineral oil: 10-30% Emulsifiers: 8-25% Sodium salt: 0-1.5%					

Table 2: Recipe of Tissue Simulate Liquid



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032311

Rev.: 01

Page: 39 of 123

6.1.2 Measurement for Tissue Simulate Liquid


The Conductivity (σ) and Permittivity (ρ) are listed in bellow table. For the SAR measurement given in this report. The temperature variation of the Tissue Simulate Liquids was $22\pm 2^{\circ}\text{C}$.

Tissue Type	Measured Frequency (MHz)	Measured Tissue		Target Tissue ($\pm 5\%$)		Deviation (Within $\pm 5\%$)		Liquid Temp. ($^{\circ}\text{C}$)	Test Date
		ϵ_r	$\sigma(\text{S/m})$	ϵ_r	$\sigma(\text{S/m})$	ϵ_r	$\sigma(\text{S/m})$		
13 Head	13	55.7	0.747	56.2	0.761	-0.89%	-1.84%	22.4	2025/05/25
750 Head	750	41.7	0.909	41.9	0.890	-0.48%	2.13%	22.2	2025/05/16
835 Head	835	41.1	0.920	41.5	0.900	-0.96%	2.22%	22.2	2025/05/18
1750 Head	1750	40.7	1.38	40.1	1.37	1.50%	0.73%	22.4	2025/05/20
1950 Head	1950	40.4	1.41	40.0	1.40	1.00%	0.71%	22.1	2025/05/22
2300 Head	2300	39.0	1.69	39.5	1.67	-1.27%	1.20%	22.2	2025/05/26
2450 Head	2450	38.6	1.85	39.2	1.80	-1.53%	2.78%	22.3	2025/06/02
2600 Head	2600	38.1	1.93	39.0	1.96	-2.31%	-1.53%	22.3	2025/05/24
3500 Head	3500	37.9	2.95	37.9	2.91	0.00%	1.37%	22.1	2025/05/28
3900 Head	3900	37.0	3.35	37.5	3.32	-1.33%	0.90%	22.2	2025/05/30
5250 Head	5250	36.5	4.68	35.9	4.71	1.67%	-0.64%	22.3	2025/06/04
5600 Head	5600	35.6	5.06	35.5	5.07	0.28%	-0.20%	22.4	2025/06/06
5750 Head	5750	35.4	5.25	35.4	5.22	0.00%	0.57%	22.4	2025/06/08

Table 3: Measurement result of Tissue electric parameters.

6.2 SAR System Check

The microwave circuit arrangement for system Check is sketched in F-12. The daily system accuracy verification occurs within the flat section of the SAM phantom. A SAR measurement was performed to see if the measured SAR was within $\pm 10\%$ from the target SAR values. The tests were conducted on the same days as the measurement of the EUT. The obtained results from the system accuracy verification are displayed in the following table (A power level of 250mW (below 3GHz) or 100mW (3-6GHz) was input to the dipole antenna). During the tests, the ambient temperature of the laboratory was in the range $22\pm 2^{\circ}\text{C}$, the relative humidity was in the range 60% and the liquid depth above the ear reference points was above 15 ± 0.5 cm in all the cases. It is seen that the system is operating within its specification, as the results are within acceptable tolerance of the reference values.

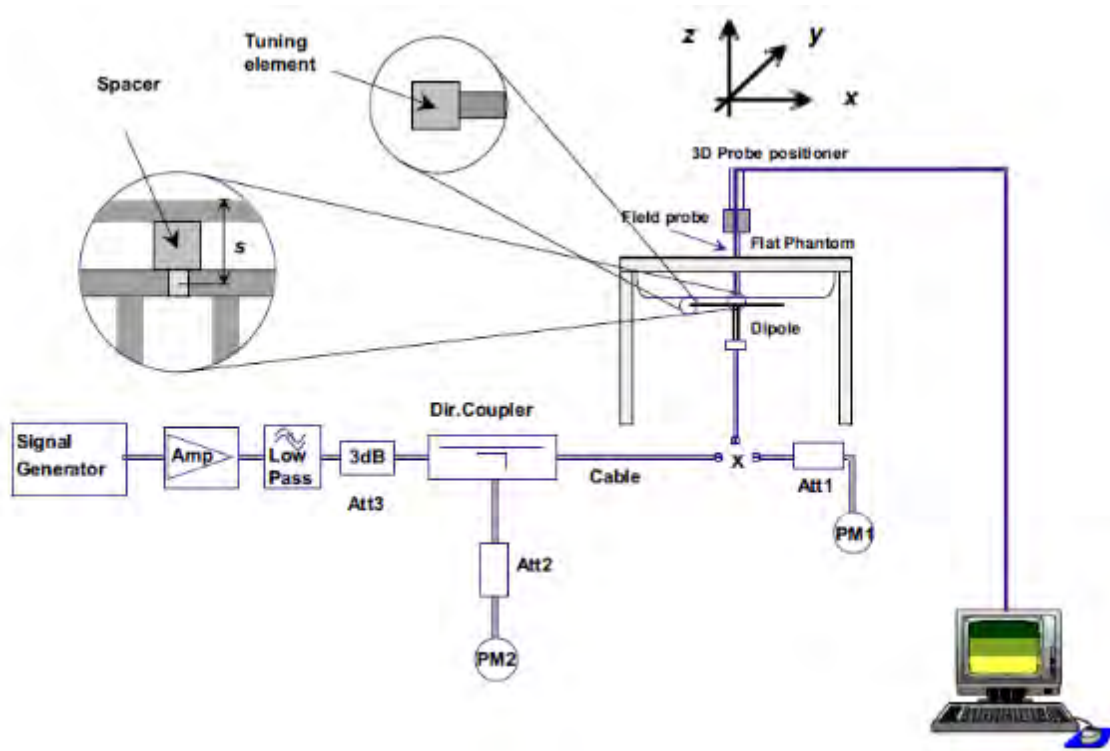

F-12. the microwave circuit arrangement used for SAR system check



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032311

Rev.: 01

Page: 41 of 123

6.2.1 Justification for Extended SAR Dipole Calibrations

1) Instead of the typical annual calibration recommended by measurement standards, longer calibration intervals of up to three years may be considered when it is demonstrated that the SAR target, impedance and return loss of a dipole have remain stable according to the following requirements. Each measured dipole is expected to evaluate with the following criteria at least on annual interval in Appendix C.

- a) There is no physical damage on the dipole;
- b) System check with specific dipole is within 10% of calibrated value;
- c) Return-loss is within 20% of calibrated measurement;
- d) Impedance is within 5Ω from the previous measurement.

2) Network analyzer probe calibration against air, distilled water and a shorting block performed before measuring liquid parameters.



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032311

Rev.: 01

Page: 42 of 123

6.2.2 Summary System Check Result(s)

Validation Kit	Measured SAR 250mW	Measured SAR 250mW	Measured SAR (normalized to 1W)	Measured SAR (normalized to 1W)	Target SAR (normalized to 1W)	Target SAR (normalized to 1W)	Deviation (Within $\pm 10\%$)		Liquid Temp. ($^{\circ}\text{C}$)	Test Date
	1g (W/kg)	10g (W/kg)	1g (W/kg)	10g (W/kg)	1-g(W/kg)	10-g(W/kg)	1- g(W/kg)	10- g(W/kg)		
CLA-13_Head	0.106	0.067	0.424	0.268	0.421	0.266	0.71%	0.75%	22.4	2025/05/25
D750V3_Head	2.26	1.53	9.04	6.12	8.54	5.80	5.85%	5.52%	22.2	2025/05/16
D835V2_Head	2.44	1.61	9.76	6.44	9.60	6.16	1.67%	4.55%	22.2	2025/05/18
D1750V2_Head	9.36	5.14	37.4	20.6	36.3	19.3	3.14%	6.53%	22.4	2025/05/20
D1950V3_Head	9.84	5.16	39.4	20.6	40.4	20.8	-2.57%	-0.77%	22.1	2025/05/22
D2300V2_Head	12.3	5.94	49.2	23.76	49.0	23.5	0.41%	1.11%	22.2	2025/05/26
D2450V2_Head	13.3	6.23	53.2	24.92	52.7	24.6	0.95%	1.30%	22.3	2025/06/02
D2600V2_Head	13.7	6.26	54.8	25.04	55.2	24.7	-0.72%	1.38%	22.3	2025/05/24
Validation Kit	Measured SAR 100mW	Measured SAR 100mW	Measured SAR (normalized to 1W)	Measured SAR (normalized to 1W)	Target SAR (normalized to 1W)	Target SAR (normalized to 1W)	Deviation (Within $\pm 10\%$)		Liquid Temp. ($^{\circ}\text{C}$)	Test Date
	1g (W/kg)	10g (W/kg)	1g (W/kg)	10g (W/kg)	1-g(W/kg)	10-g(W/kg)	1- g(W/kg)	10- g(W/kg)		
D3500V2_3.5GHz_Head	6.54	2.49	65.4	24.9	65.8	25.0	-0.61%	-0.40%	22.1	2025/05/28
D3900V2_3.9GHz_Head	6.72	2.33	67.2	23.3	67.6	23.5	-0.59%	-0.85%	22.2	2025/05/30
D5GHzV2_5.25G_Head	7.48	2.06	74.8	20.6	77.2	21.9	-3.11%	-5.94%	22.3	2025/06/04
D5GHzV2_5.6G_Head	7.94	2.23	79.4	22.3	81.1	22.8	-2.10%	-2.19%	22.4	2025/06/06
D5GHzV2_5.75G_Head	7.56	2.09	75.6	20.9	77.8	21.7	-2.83%	-3.69%	22.4	2025/06/08

Table 4: SAR System Check Result.

6.2.3 Detailed System Check Results

Please see the Appendix A

7 Test Configuration

7.1 Operation Configurations

7.1.1 WCDMA Test Configuration

1) Output Power Verification

Maximum output power is verified on the high, middle and low channels according to procedures described in section 5.2 of 3GPP TS 34.121, using the appropriate RMC or AMR with TPC (transmit power control) set to all "1's" for WCDMA/HSDPA or by applying the required inner loop power control procedures to maintain maximum output power while HSUPA is active. Results for all applicable physical channel configurations (DPCCH, DPDCHn and spreading codes, HSDPA, HSPA) are required in the SAR report. All configurations that are not supported by the handset or cannot be measured due to technical or equipment limitations must be clearly identified.

2) Head SAR

SAR for next to the ear head exposure is measured using a 12.2 kbps RMC with TPC bits configured to all "1's". The 3G SAR test reduction procedure is applied to AMR configurations with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured for 12.2 kbps AMR in 3.4 kbps SRB (signaling radio bearer) using the highest reported SAR configuration in 12.2 kbps RMC for head exposure.

3) Body SAR

SAR for body configurations is measured using a 12.2 kbps RMC with TPC bits configured to all "1's". The 3G SAR test reduction procedure is applied to other spreading codes and multiple DPDCHn configurations supported by the handset with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured using an applicable RMC configuration with the corresponding spreading code or DPDCHn, for the highest reported body-worn accessory exposure SAR configuration in 12.2 kbps RMC. When more than 2 DPDCHn are supported by the handset, it may be necessary to configure additional DPDCHn using FTM (Factory Test Mode) or other chipset based test approaches with parameters similar to those used in 384 kbps and 768 kbps RMC.

4) HSDPA / HSUPA

RMC 12.2kbps setting is used to evaluate SAR. If the maximum output power for production units in HSDPA / HSUPA is $\leq \frac{1}{4}$ dB higher than RMC 12.2Kbps or when the highest measured SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power of HSDPA / HSUPA to RMC12.2Kbps and the adjusted SAR is ≤ 1.5 W/kg, SAR measurement is not required for HSDPA / HSUPA.

a) HSDPA

HSDPA is configured according to the applicable UE category of a test device. The number of HS-DSCH/HS-PDSCHs, HARQ processes, minimum inter-TTI interval, transport block sizes and RV coding sequence are defined by the H-set. To maintain a consistent test configuration and stable transmission conditions, QPSK is used in the H-set for SAR testing. HS-DPCCH should be configured with a CQI feedback cycle of 4 ms and a CQI repetition factor of 2 to maintain a constant rate of active CQI slots. DPCCH and DPDCH gain factors (β_c , β_d), and HS-DPCCH power offset parameters (Δ_{ACK} , Δ_{NACK} , Δ_{CQI}) are set according to values indicated in the following table. The CQI value is determined by the UE category, transport block size, number of HS-PDSCHs and modulation used in the H-set.

Sub-test	β_c	Bd	β_d (SF)	β_c/β_d	β_{hs}	CM(dB)	MPR (dB)
1	2/15	15/15	64	2/15	4/15	0.0	0
2	12/15(3)	15/15(3)	64	12/15(3)	24/15	1.0	0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 8$ Ahs = $\beta_{hs}/\beta_c = 30/15$ $\beta_{hs} = 30/15 \beta_c$

Note2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude(EVM) with HS-DPCCH test in clause 5.13.1.A, and HSDPA EVM with phase

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032311

Rev.: 01

Page: 44 of 123

discontinuity in clause 5.13.1AA, ΔACK and $\Delta\text{NACK} = 8$ ($A_{hs}=30/15$) with $\beta_{hs}=30/15*\beta_c$, and $\Delta\text{CQI} = 7$ ($A_{hs}=24/15$) with $\beta_{hs}=24/15*\beta_c$.

Note3: $CM=1$ for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

The measurements were performed with a Fixed Reference Channel (FRC) and H-Set 1 QPSK.

Parameter	Value
Nominal average inf. bit rate	534 kbit/s
Inter-TTI Distance	3 TTI"s
Number of HARQ Processes	2 Processes
Information Bit Payload	3202 Bits
MAC-d PDU size	336 Bits
Number Code Blocks	1 Block
Binary Channel Bits Per TTI	4800 Bits
Total Available SMLs in UE	19200 SMLs
Number of SMLs per HARQ Process	9600 SMLs
Coding Rate	0.67
Number of Physical Channel Codes	5

Table 1: settings of required H-Set 1 QPSK acc. to 3GPP 34.121

HS-DSCH Category	MaximumHS-DSCH Codes Received	Minimum Inter-TTI Interval	MaximumHS-DSCH TransportBlockBits/HS-DSCH TTI	TotalSoft Channel Bits
1	5	3	7298	19200
2	5	3	7298	28800
3	5	2	7298	28800
4	5	2	7298	38400
5	5	1	7298	57600
6	5	1	7298	67200
7	10	1	14411	115200
8	10	1	14411	134400
9	15	1	25251	172800
10	15	1	27952	172800
11	5	2	3630	14400
12	5	1	3630	28800
13	15	1	34800	259200
14	15	1	42196	259200
15	15	1	23370	345600
16	15	1	27952	345600

Table 2: HSDPA UE category

b) HSUPA

Due to inner loop power control requirements in HSUPA, a commercial communication test set should be used for the output power and SAR tests. The 12.2 kbps RMC, FRC H-set 1 and E-DCH configurations for HSUPA should

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032311

Rev.: 01

Page: 45 of 123

be configured according to the values indicated below as well as other applicable procedures described in the WCDMA Handset and Release 5 HSUPA Data Device sections of 3G device.

Sub-test ^o	$\beta_{e\downarrow}$	$\beta_{d\downarrow}$	β_d (SF) ^o	β_e/β_d	$\beta_{hs\downarrow}(1)$ ^o	$\beta_{ac\downarrow}$	$\beta_{ed\downarrow}$	$\beta_{e\downarrow}$ (SF) ^o	$\beta_{ed\downarrow}$ (code) ^o	CM(²) ^o (dB) ^o	MP R _x ^o (dB) ^o	AG ⁽⁴⁾ Inde _x ^o	E-TFC I ^o
1 ^o	11/15 ⁽³⁾ ^o	15/15 ⁽³⁾ ^o	64 ^o	11/15 ⁽³⁾ ^o	22/15 ^o	209/225 ^o	1039/225 ^o	4 ^o	1 ^o	1.0 ^o	0.0 ^o	20 ^o	75 ^o
2 ^o	6/15 ^o	15/15 ^o	64 ^o	6/15 ^o	12/15 ^o	12/15 ^o	94/75 ^o	4 ^o	1 ^o	3.0 ^o	2.0 ^o	12 ^o	67 ^o
3 ^o	15/15 ^o	9/15 ^o	64 ^o	15/9 ^o	30/15 ^o	30/15 ^o	$\beta_{ed1}:47/15$ $\beta_{ed2}:47/15$	4 ^o	2 ^o	2.0 ^o	1.0 ^o	15 ^o	92 ^o
4 ^o	2/15 ^o	15/15 ^o	64 ^o	2/15 ^o	4/15 ^o	2/15 ^o	56/75 ^o	4 ^o	1 ^o	3.0 ^o	2.0 ^o	17 ^o	71 ^o
5 ^o	15/15 ⁽⁴⁾ ^o	15/15 ⁽⁴⁾ ^o	64 ^o	15/15 ⁽⁴⁾ ^o	30/15 ^o	24/15 ^o	134/15 ^o	4 ^o	1 ^o	1.0 ^o	0.0 ^o	21 ^o	81 ^o
Note 1: ΔACK , $\Delta NACK$ and $\Delta CQI=8$ $A_{hs} = \beta_{hs}/\beta_e = 30/15$ $\beta_{hs} = 30/15 * \beta_{e\downarrow}$ Note 2: CM = 1 for $\beta_e/\beta_d = 12/15$, $\beta_{hs}/\beta_e = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference ^o Note 3 : For subtest 1 the β_e/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_e = 10/15$ and $\beta_d = 15/15$ ^o Note 4 : For subtest 5 the β_e/β_d ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_e = 14/15$ and $\beta_d = 15/15$ ^o Note 5 : Testing UE using E-DPDCH Physical Layer category 1 Sub-test 3 is not required according to TS 25.306 Table 5.1g ^o Note 6: β_{ed} can not be set directly; it is set by Absolute Grant Value. ^o													

Table 3: Subtests for UMTS Release 6 HSUPA

UE E-DCH Category	Maximum E-DCH Codes Transmitted	Number of HARQ Processes	E-DCH TTI(ms)	Minimum Spreading Factor	Maximum E-DCH Transport Block Bits	Max Rate (Mbps)
1	1	4	10	4	7110	0.7296
2	2	8	2	4	2798	1.4592
	2	4	10	4	14484	
3	2	4	10	4	14484	1.4592
4	2	8	2	2	5772	2.9185
	2	4	10	2	20000	2.00
5	2	4	10	2	20000	2.00
6 (No DPDCH)	4	8	10	2SF2&2SF	11484	5.76
	4	4	2	4	20000	2.00
7 (No DPDCH)	4	8	2	2SF2&2SF	22996	?
	4	4	10	4	20000	?
NOTE: When 4 codes are transmitted in parallel, two codes shall be transmitted with SF2 and two with SF4. UE categories 1 to 6 support QPSK only. UE category 7 supports QPSK and 16QAM. (TS25.306-7.3.0).						

Table 4: HSUPA UE category

c) DC-HSDPA

SAR is required for Rel. 8 DC-HSDPA when SAR is required for Rel. 5 HSDPA; otherwise, the 3G SAR test reduction procedure is applied to DC-HSDPA with 12.2 kbps RMC as the primary mode. Power is measured for DC-HSDPA according to the H-Set 12, FRC configuration in Table C.8.1.12 of 3GPP TS 34.121-1 to determine SAR test reduction. A primary and a Second serving HS-DSCH Cell are required to perform the power measurement and for the results to be acceptable.

The following tests were completed according to procedures in section 7.3.13 of 3GPP TS 34.108 v9.5.0. A summary of these settings are illustrated below:

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032311

Rev.: 01

Page: 46 of 123

Downlink Physical Channels are set as per 3GPP TS34.121-1 v9.0.0 E.5.0

Table E.5.0: Levels for HSDPA connection setup

Parameter During Connection setup	Unit	Value
P-CPICH_Ec/Ior	dB	-10
P-CCPCH and SCH_Ec/Ior	dB	-12
PICH_Ec/Ior	dB	-15
HS-PDSCH	dB	off
HS-SCCH_1	dB	off
DPCH_Ec/Ior	dB	-5
OCNS_Ec/Ior	dB	-3.1

Call is set up as per 3GPP TS34.108 v9.5.0 sub clause 7.3.13.

The configurations of the fixed reference channels for HSDPA RF tests are described in 3GPP TS 34.121, annex C for FDD and 3GPP TS 34.122.

The measurements were performed with a Fixed Reference Channel (FRC) H-Set 12 with QPSK.

Parameter	Value
Nominal average inf. bit rate	60 kbit/s
Inter-TTI Distance	1 TTI's
Number of HARQ Processes	6 Processes
Information Bit Payload	120 Bits
Number Code Blocks	1 Block
Binary Channel Bits Per TTI	960 Bits
Total Available SMLs in UE	19200 SMLs
Number of SMLs per HARQ Process	3200 SMLs
Coding Rate	0.15
Number of Physical Channel Codes	1

Table 5: settings of required H-Set 12 QPSK acc. To 3GPP 34.121

Note:

1. The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table above.
2. Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.

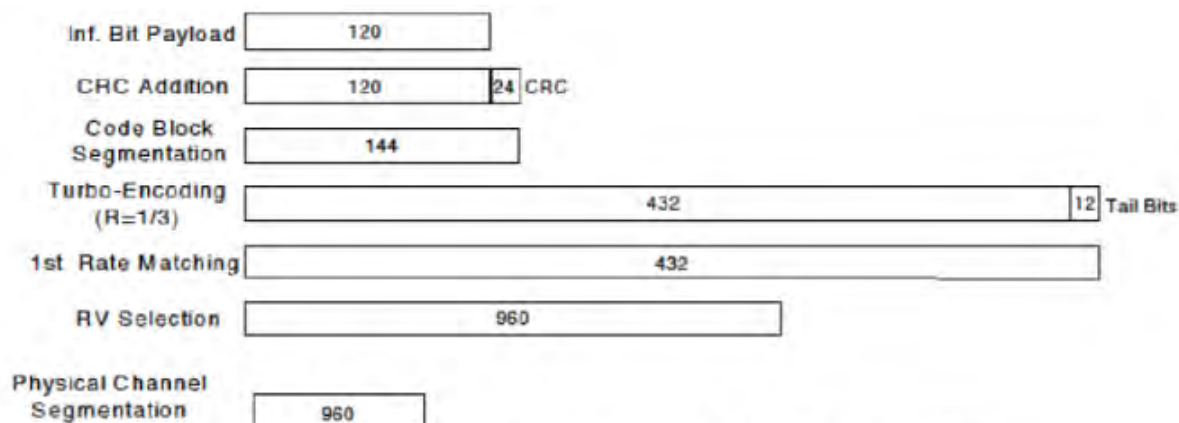


Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)

The following 4 Sub-tests for HSDPA were completed according to Release 5 procedures. A summary of subtest settings are illustrated below:

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032311

Rev.: 01

Page: 48 of 123


7.1.2 WiFi Test Configuration

A Wi-Fi device must be configured to transmit continuously at the required data rate, channel bandwidth and signal modulation, using the highest transmission duty factor supported by the test mode tools for SAR measurement.

7.1.3 Duty cycle

Wi-Fi 2.4GHz 802.11b:

Duty cycle= 100%

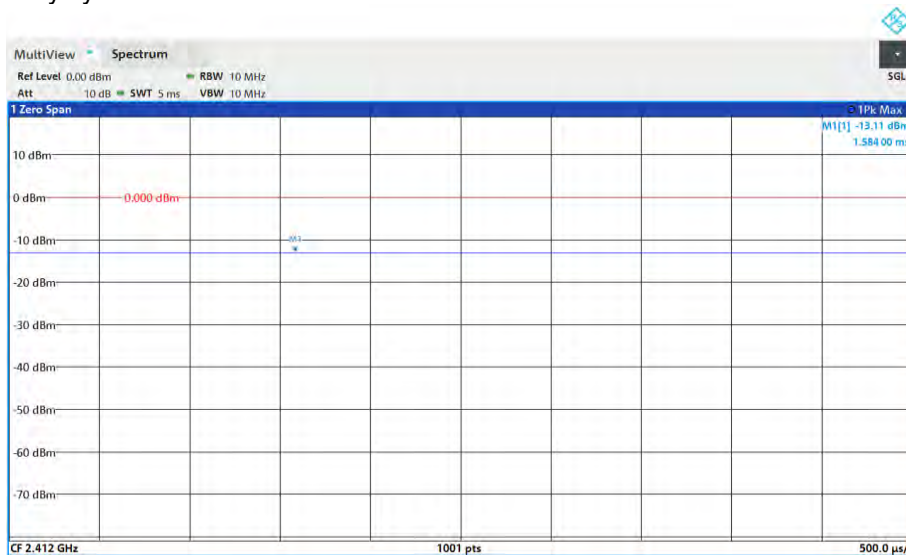

Wi-Fi 5GHz 802.11a:

Duty cycle=97.48%





SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032311

Rev.: 01

Page: 49 of 123

Wi-Fi 5GHz 802.11ac 80M:
Duty cycle=90.53%





SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032311

Rev.: 01

Page: 50 of 123

7.1.3.1 Initial Test Position SAR Test Reduction Procedure

DSSS and OFDM configurations are considered separately according to the required SAR procedures. SAR is measured in the initial test position using the 802.11 transmission mode configuration required by the DSSS procedure or initial test configuration and subsequent test configuration(s) according to the OFDM procedures. The initial test position procedure is described in the following:

- 1) . When the reported SAR of the initial test position is ≤ 0.4 W/kg, further SAR measurement is not required for the other (remaining) test positions in that exposure configuration and 802.11 transmission mode combinations within the frequency band or aggregated band. SAR is also not required for that exposure configuration in the subsequent test configuration(s).
- 2) . When the reported SAR of the initial test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position using subsequent highest extrapolated or estimated 1-g SAR conditions determined by area scans or next closest/smallest test separation distance and maximum RF coupling test positions based on manufacturer justification, on the highest maximum output power channel, until the reported SAR is ≤ 0.8 W/kg or all required test positions (left, right, touch, tilt or subsequent surfaces and edges) are tested.
- 3) . For all positions/configurations tested using the initial test position and subsequent test positions, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested. a) Additional power measurements may be required for this step, which should be limited to those necessary for identifying the subsequent highest output power channels.

7.1.3.2 Initial Test Configuration Procedures

An initial test configuration is determined for OFDM transmission modes according to the channel bandwidth, modulation and data rate combination(s) with the highest maximum output power specified for production units in each standalone and aggregated frequency band. SAR is measured using the highest measured maximum output power channel. For configurations with the same specified or measured maximum output power, additional transmission mode and test channel selection procedures are required. SAR test reduction for subsequent highest output test channels is determined according to *reported* SAR of the initial test configuration.

For next to the ear, hotspot mode and UMC mini-tablet exposure configurations where multiple test positions are required, the initial test position procedure is applied to minimize the number of test positions required for SAR measurement using the initial test configuration transmission mode. For fixed exposure conditions that do not have multiple SAR test positions, SAR is measured in the transmission mode determined by the initial test configuration.

When the *reported* SAR of the initial test configuration is > 0.8 W/kg, SAR measurement is required for subsequent next highest measured output power channel(s) in the initial test configuration until *reported* SAR is ≤ 1.2 W/kg or all required channels are tested.



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032311

Rev.: 01

Page: 51 of 123

7.1.3.3 Subsequent Test Configuration Procedures

SAR measurement requirements for the remaining 802.11 transmission mode configurations that have not been tested in the initial test configuration are determined separately for each standalone and aggregated frequency band, in each exposure condition, according to the maximum output power specified for production units. The initial test position procedure is applied to next to the ear, UMPC mini-tablet and hotspot mode configurations. When the same maximum output power is specified for multiple transmission modes, additional power measurements may be required to determine if SAR measurements are required for subsequent highest output power channels in a subsequent test configuration. The subsequent test configuration and SAR measurement procedures are described in the following.

- 1) . When SAR test exclusion provisions of KDB Publication 447498 are applicable and SAR measurement is not required for the initial test configuration, SAR is also not required for the next highest maximum output power transmission mode subsequent test configuration(s) in that frequency band or aggregated band and exposure configuration.
- 2) . When the highest *reported* SAR for the initial test configuration (when applicable, include subsequent highest output channels), according to the initial test position or fixed exposure position requirements, is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg, SAR is not required for that subsequent test configuration.
- 3) . The number of channels in the initial test configuration and subsequent test configuration can be different due to differences in channel bandwidth. When SAR measurement is required for a subsequent test configuration and the channel bandwidth is smaller than that in the initial test configuration, all channels in the subsequent test configuration that overlap with the larger bandwidth channel tested in the initial test configuration should be used to determine the highest maximum output power channel. This step requires additional power measurement to identify the highest maximum output power channel in the subsequent test configuration to determine SAR test reduction.
 - a) SAR should first be measured for the channel with highest measured output power in the subsequent test configuration.
 - b) SAR for subsequent highest measured maximum output power channels in the subsequent test configuration is required only when the *reported* SAR of the preceding higher maximum output power channel(s) in the subsequent test configuration is > 1.2 W/kg or until all required channels are tested. i) For channels with the same measured maximum output power, SAR should be measured using the channel closest to the center frequency of the larger channel bandwidth channel in the initial test configuration.
- 4) . SAR measurements for the remaining highest specified maximum output power OFDM transmission mode configurations that have not been tested in the initial test configuration (highest maximum output) or subsequent test configuration(s) (subsequent next highest maximum output power) is determined by recursively applying the subsequent test configuration procedures in this section to the remaining configurations according to the following:
 - a) replace "subsequent test configuration" with "next subsequent test configuration" (i.e., subsequent next highest specified maximum output power configuration)
 - b) replace "initial test configuration" with "all tested higher output power configurations"



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032311

Rev.: 01

Page: 52 of 123

7.1.3.4 2.4 GHz WiFi SAR Procedures

Separate SAR procedures are applied to DSSS and OFDM configurations in the 2.4 GHz band to simplify DSSS test requirements. For 802.11b DSSS SAR measurements, DSSS SAR procedure applies to fixed exposure test position and initial test position procedure applies to multiple exposure test positions. When SAR measurement is required for an OFDM configuration, the initial test configuration, subsequent test configuration and initial test position procedures are applied. The SAR test exclusion requirements for 802.11g/n OFDM configurations are described in following.

- **802.11b DSSS SAR Test Requirements**

SAR is measured for 2.4 GHz 802.11b DSSS using either a fixed test position or, when applicable, the initial test position procedure. SAR test reduction is determined according to the following:

- 1) . When the reported SAR of the highest measured maximum output power channel for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
- 2) . When the reported SAR is > 0.8 W/kg, SAR is required for that exposure configuration using the next highest measured output power channel. When any reported SAR is > 1.2 W/kg, SAR is required for the third channel; i.e., all channels require testing.

- **2.4 GHz 802.11g/n OFDM SAR Test Exclusion Requirements**

When SAR measurement is required for 2.4 GHz 802.11g/n OFDM configurations, the measurement and test reduction procedures for OFDM are applied (section 5.3, including sub-sections). SAR is not required for the following 2.4 GHz OFDM conditions.

- 1) . When KDB Publication 447498 SAR test exclusion applies to the OFDM configuration.
- 2) . When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

- **SAR Test Requirements for OFDM configurations**

When SAR measurement is required for 802.11 g/n OFDM configurations, each standalone and frequency aggregated band is considered separately for SAR test reduction. In applying the initial test configuration and subsequent test configuration procedures, the 802.11 transmission configuration with the highest specified maximum output power and the channel within a test configuration with the highest measured maximum output power should be clearly distinguished to apply the procedures.



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032311

Rev.: 01

Page: 53 of 123

7.1.3.5 5 GHz WiFi SAR Procedures

- **U-NII-1 and U-NII-2A Bands**

For devices that operate in only one of the U-NII-1 and U-NII-2A bands, the normally required SAR procedures for OFDM configurations are applied. For devices that operate in both U-NII bands using the same transmitter and antenna(s), SAR test reduction is determined according to the following:

- 1) When the same maximum output power is specified for both bands, begin SAR measurement in U-NII-2A band by applying the OFDM SAR requirements. If the highest reported SAR for a test configuration is ≤ 1.2 W/kg, SAR is not required for U-NII-1 band for that configuration (802.11 mode and exposure condition); otherwise, both bands are tested independently for SAR.
- 2) When different maximum output power is specified for the bands, begin SAR measurement in the band with higher specified maximum output power. The highest reported SAR for the tested configuration is adjusted by the ratio of lower to higher specified maximum output power for the two bands. When the adjusted SAR is ≤ 1.2 W/kg, SAR is not required for the band with lower maximum output power in that test configuration; otherwise, both bands are tested independently for SAR.
- 3) The two U-NII bands may be aggregated to support a 160 MHz channel on channel number 50. Without additional testing, the maximum output power for this is limited to the lower of the maximum output power certified for the two bands. When SAR measurement is required for at least one of the bands and the highest reported SAR adjusted by the ratio of specified maximum output power of aggregated to standalone band is > 1.2 W/kg, SAR is required for the 160 MHz channel. This procedure does not apply to an aggregated band with maximum output higher than the standalone band(s); the aggregated band must be tested independently for SAR. SAR is not required when the 160 MHz channel is operating at a reduced maximum power and also qualifies for SAR test exclusion.

- **U-NII-2C and U-NII-3 Bands**

The frequency range covered by these bands is 380 MHz (5.47 – 5.85 GHz), which requires a minimum of at least two SAR probe calibration frequency points to support SAR measurements. When Terminal Doppler Weather Radar (TDWR) restriction applies, all channels that operate at 5.60 – 5.65 GHz must be included to apply the SAR test reduction and measurement procedures.

When the same transmitter and antenna(s) are used for U-NII-2C band and U-NII-3 band or 5.8 GHz band of §15.247, the bands may be aggregated to enable additional channels with 20, 40 or 80 MHz bandwidth to span across the band gap, as illustrated in Appendix B. The maximum output power for the additional band gap channels is limited to the lower of those certified for the bands. Unless band gap channels are permanently disabled, they must be considered for SAR testing. The frequency range covered by these bands is 380 MHz (5.47 – 5.85 GHz), which requires a minimum of at least two SAR probe calibration frequency points to support SAR measurements. To maintain SAR measurement accuracy and to facilitate test reduction, the channels in U-NII-2C band above 5.65 GHz may be grouped with the 5.8 GHz channels in U-NII-3 or §15.247 band to enable two SAR probe calibration frequency points to cover the bands, including the band gap channels. When band gap channels are supported and the bands are not aggregated for SAR testing, band gap channels must be considered independently in each band according to the normally required OFDM SAR measurement and probe calibration frequency points requirements.



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032311

Rev.: 01

Page: 54 of 123

OFDM Transmission Mode SAR Test Configuration and Channel Selection Requirements

The initial test configuration for 5 GHz OFDM transmission modes is determined by the 802.11 configuration with the highest maximum output power specified for production units, including tune-up tolerance, in each standalone and aggregated frequency band. SAR for the initial test configuration is measured using the highest maximum output power channel determined by the default power measurement procedures. When multiple configurations in a frequency band have the same specified maximum output power, the initial test configuration is determined according to the following steps applied sequentially.

- 1) The largest channel bandwidth configuration is selected among the multiple configurations with the same specified maximum output power.
 - 2) If multiple configurations have the same specified maximum output power and largest channel bandwidth, the lowest order modulation among the largest channel bandwidth configurations is selected.
 - 3) If multiple configurations have the same specified maximum output power, largest channel bandwidth and lowest order modulation, the lowest data rate configuration among these configurations is selected.
 - 4) When multiple transmission modes (802.11a/g/n/ac) have the same specified maximum output power, largest channel bandwidth, lowest order modulation and lowest data rate, the lowest order 802.11 mode is selected; i.e., 802.11a is chosen over 802.11n then 802.11ac or 802.11g is chosen over 802.11n.
- After an initial test configuration is determined, if multiple test channels have the same measured maximum output power, the channel chosen for SAR measurement is determined according to the following. These channel selection procedures apply to both the initial test configuration and subsequent test configuration(s), with respect to the default power measurement procedures or additional power measurements required for further SAR test reduction. The same procedures also apply to subsequent highest output power channel(s) selection.
- a) The channel closest to mid-band frequency is selected for SAR measurement.
 - b) For channels with equal separation from mid-band frequency; for example, high and low channels or two mid-band channels, the higher frequency (number) channel is selected for SAR measurement.

• SAR Test Requirements for OFDM configurations

When SAR measurement is required for 802.11 a/n/ac OFDM configurations, each standalone and frequency aggregated band is considered separately for SAR test reduction. When the same transmitter and antenna(s) are used for U-NII-1 and U-NII-2A bands, additional SAR test reduction applies. When band gap channels between U-NII-2C band and 5.8 GHz U-NII-3 or §15.247 band are supported, the highest maximum output power transmission mode configuration and maximum output power channel across the bands must be used to determine SAR test reduction, according to the initial test configuration and subsequent test configuration requirements. In applying the initial test configuration and subsequent test configuration procedures, the 802.11 transmission configuration with the highest specified maximum output power and the channel within a test configuration with the highest measured maximum output power should be clearly distinguished to apply the procedures.



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032311


Rev.: 01

Page: 55 of 123

7.1.4 BT Test Configuration

For the Bluetooth SAR tests, a communication link is set up with the test mode software for BT mode test. Bluetooth USES frequency hopping technology to divide the transmitted data into packets and transmit the packets respectively through 79 designated Bluetooth channels, frequency hops at 1600 hops/second per the Bluetooth standard, the EUT is operated at the RF continuous emission mode.

BT DH5 Duty Cycle=76.71%

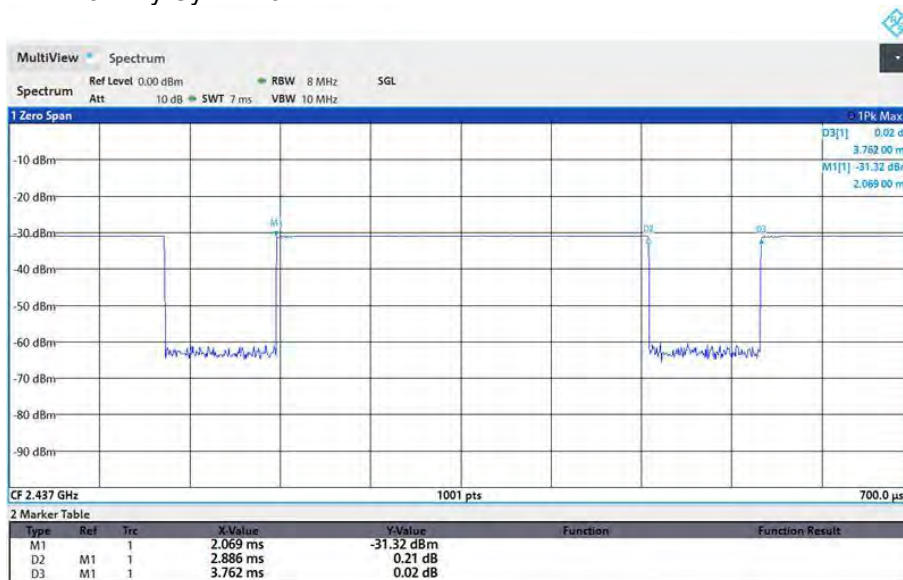

7.1.5 LTE Test Configuration

LTE modes were tested according to FCC KDB 941225 D05 publication. Please see notes after the tabulated SAR data for required test configurations. Establishing connections with base station simulators ensure a consistent means for testing SAR and are recommended for evaluating SAR [4]. The Anritsu MT8820C was used for LTE output power measurements and SAR testing. Max power control was used so the UE transmits with maximum output power during SAR testing. SAR must be measured with the maximum TTI (transmit time interval) supported by the device in each LTE configuration.

TDD LTE test consideration

For Time-Division Duplex (TDD) systems, SAR must be tested using a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by the defined 3GPP LTE TDD configurations.

SAR was tested with the highest transmission duty factor (63.33%) using Uplink-downlink configuration 0 and Special subframe configuration 7.

LTE TDD Band support 3GPP TS 36.211 section 4.2 for Type 2 Frame Structure and Table 4.2-2 for uplink-downlink configurations and Table 4.2-1 for Special subframe configurations.

Frame structure type 2:

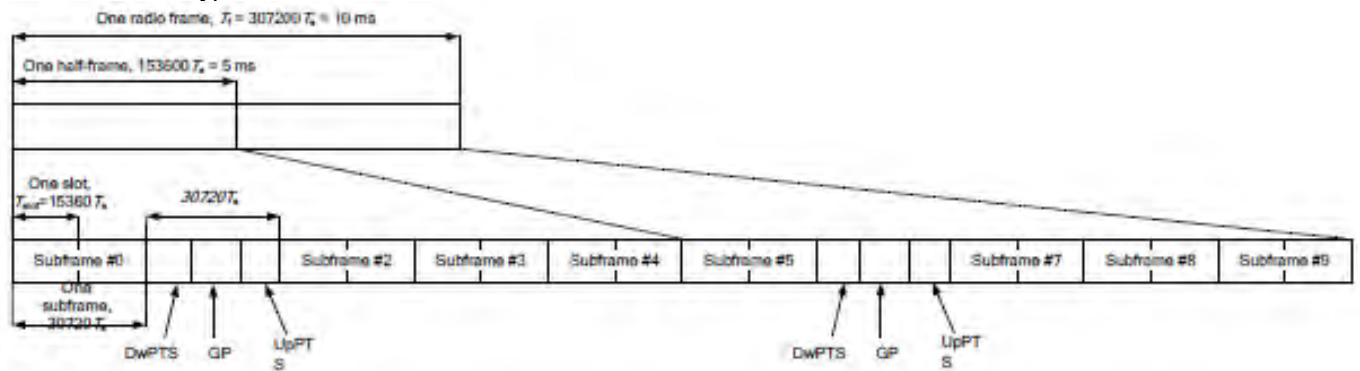


Table 4.2-1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS).

Special subframe configuration	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink		
	DwPTS	UpPTS		DwPTS	UpPTS	
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
0	6592.Ts	2192.Ts	2560.Ts	7680.Ts	2192.Ts	2560.Ts
1	19760.Ts			20480.Ts		
2	21952.Ts			23040.Ts		
3	24144.Ts			25600.Ts		
4	26336.Ts	4384.Ts	5120.Ts	7680.Ts	4384.Ts	5120.Ts
5	6592.Ts			20480.Ts		
6	19760.Ts			23040.Ts		
7	21952.Ts			25600.Ts		
8	24144.Ts			-	-	
9	13168.Ts			-	-	

Table 4.2-2: Uplink-downlink configurations.



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032311

Rev.: 01

Page: 57 of 123

Uplink-downlink configuration	Downlink-to-Uplink Switch-point periodicity	Subframe number									
		0	1	2	3	4	5	6	7	8	9
0	5 ms	D	S	U	U	U	D	S	U	U	U
1	5 ms	D	S	U	U	D	D	S	U	U	D
2	5 ms	D	S	U	D	D	D	S	U	D	D
3	10 ms	D	S	U	U	U	D	D	D	D	D
4	10 ms	D	S	U	U	D	D	D	D	D	D
5	10 ms	D	S	U	D	D	D	D	D	D	D
6	5 ms	D	S	U	U	U	D	S	U	U	D

Calculated Duty Cycle=[Extended cyclic prefix in uplink x (Ts) x # of S + # of U]/10ms

Uplink-Downlink Configuration	Downlink-to-Uplink Switch-point Periodicity	Subframe Number										Calculated Duty Cycle (%)
		0	1	2	3	4	5	6	7	8	9	
0	5 ms	D	S	U	U	U	D	S	U	U	U	63.33
1	5 ms	D	S	U	U	D	D	S	U	U	D	43.33
2	5 ms	D	S	U	D	D	D	S	U	D	D	23.33
3	10 ms	D	S	U	U	U	D	D	D	D	D	31.67
4	10 ms	D	S	U	U	D	D	D	D	D	D	21.67
5	10 ms	D	S	U	D	D	D	D	D	D	D	11.67
6	5 ms	D	S	U	U	U	D	S	U	U	D	53.33

A) Spectrum Plots for RB Configurations

A properly configured base station simulator was used for SAR tests and power measurements. Therefore, spectrum plots for RB configurations were not required to be included in this report.

B) MPR

MPR is permanently implemented for this device by the manufacturer. The specific manufacturer target MPR is indicated alongside the SAR results. MPR is enabled for this device, according to 3GPP TS36.101 Section 6.2.3 – 6.2.5 under Table 6.2.3-1.

Modulation	Channel bandwidth/Transmission bandwidth						MPR (dB)
	1.4 MHz	3 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	0
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	1
16QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	1
16QAM	> 5	> 4	> 8	> 12	> 16	> 18	2
64QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	2
64QAM	> 5	> 4	> 8	> 12	> 16	> 18	3
256QAM	≥ 1						5



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032311

Rev.: 01

Page: 58 of 123

C) A-MPR

A-MPR (Additional MPR) has been disabled for all SAR tests by setting NS=01 on the base station simulator.

D) Largest channel bandwidth standalone SAR test requirements

1) QPSK with 1 RB allocation

Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel. When the reported SAR is ≤ 0.8 W/kg, testing of the remaining RB offset configurations and required test channels is not required for 1 RB allocation; otherwise, SAR is required for the remaining required test channels and only for the RB offset configuration with the highest output power for that channel. When the reported SAR of a required test channel is > 1.45 W/kg, SAR is required for all three RB offset configurations for that required test channel.

2) QPSK with 50% RB allocation

The procedures required for 1 RB allocation in 1) are applied to measure the SAR for QPSK with 50% RB allocation.

3) QPSK with 100% RB allocation

For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation in 1) and 2) are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.

4) Higher order modulations

For each modulation besides QPSK; e.g., 16-QAM, 64-QAM, apply the QPSK procedures in above sections to determine the QAM configurations that may need SAR measurement. For each configuration identified as required for testing, SAR is required only when the highest maximum output power for the configuration in the higher order modulation is $> \frac{1}{2}$ dB higher than the same configuration in QPSK or when the reported SAR for the QPSK configuration is > 1.45 W/kg.

E) Other channel bandwidth standalone SAR test requirements

For the other channel bandwidths used by the device in a frequency band, apply all the procedures required for the largest channel bandwidth in section A) to determine the channels and RB configurations that need SAR testing and only measure SAR when the highest maximum output power of a configuration requiring testing in the smaller channel bandwidth is $> \frac{1}{2}$ dB higher than the equivalent channel configurations in the largest channel bandwidth configuration or the reported SAR of a configuration for the largest channel bandwidth is > 1.45 W/kg.



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032311

Rev.: 01

Page: 59 of 123

F) LTE CA additional specification

The device supports intra-band contiguous and inter-band discontinuous uplink and downlink LTE Carrier Aggregation (CA). When carrier aggregation applies, implementation and measurement details for the following are necessary.

- a) Intra-band carrier aggregation requirements for uplink.
- b) Intra-band and inter-band carrier aggregation requirements for downlink.

The possible downlink and uplink LTE CA combinations supported by this device are as below tables per 3GPP TS 36.101 V15.4.0. The conducted power measurement results of downlink and uplink LTE CA are provided in Appendix E (Conducted RF Output Power). The downlink LTE CA SAR test is not required since the maximum output power for downlink LTE CA was not more than 0.25dB higher than the maximum output power for without downlink LTE CA.

SAR test procedure for intra-band contiguous UL LTE CA is as below:

1) Maximum output power is measured for each UL CA configuration for the required test channels described in KDB 941225 D05

- UL PCC configuration is determined by the required test channel
- SCC and subsequent CCs are added alternatively to either side of the PCC or within the transmission band for channels at the ends of a frequency band.

2) SAR for UL CA is required in each exposure condition and frequency band combination

3) For this device, as the maximum output for Intra-band uplink LTE CA is $\leq$ standalone LTE mode (without CA),

- PCC is configured according to the highest standalone SAR configuration tested.
- SCC and subsequent CCs are configured according to procedures used for power measurement and parameters (BW, RB etc.) similar to that used for the PCC

4) When the reported SAR for UL CA configuration, described above, is > 1.2 W/kg, UL CA SAR is also required for all required test channels (PCC based)

5) UL CA SAR is also required for standalone SAR configurations > 1.2 W/kg when they are scaled to the UL CA power level.

Intra-band contiguous CA operating bands:

E-UTRA CA Band	E-UTRA Band	Uplink (UL) operating band			Downlink (DL) operating band			Duplex Mode
		BS receive / UE transmit			BS transmit / UE receive			
		F _{UL_low} – F _{UL_high}			F _{DL_low} – F _{DL_high}			
CA_5B	5	826.5 MHz	–	846.5 MHz	869 MHz	–	894 MHz	FDD
CA_66B	66	1710 MHz	–	1780 MHz	2110 MHz	–	2200MHz	FDD
CA_66C	66	1710 MHz	–	1780 MHz	2110 MHz	–	2200MHz	FDD

6) General PCC and SCC configuration selection procedure

- PCC uplink channel, channel bandwidth, modulation and RB configurations were selected based on section C)3)b)ii) of KDB 941225 D05 V01r02. All LTE bandwidth conducted powers needed for PCC uplink configuration selection can be found in appendix E. The downlink PCC channel was paired with the selected PCC uplink channel according to normal configurations without carrier aggregation.

- To maximize aggregated bandwidth, highest channel bandwidth available for that CA combination was selected for SCC. For inter-band CA, the SCC downlink channels were selected near the middle of their transmission bands. For contiguous intra-band CA, the downlink channel spacing between the component carriers was set to multiple of 300 kHz less than the nominal channel spacing defined in section 5.4.1A of 3GPP TS 36.521. For non-contiguous intra-band CA, the downlink channel spacing between the component carriers was set to be larger than the nominal channel spacing and provided maximum separation between the component carriers.

All selected PCC and SCC(s) remained fully within the uplink/downlink transmission band of the respective component carrier.



DL CA Power Measurement Setup

c) Inter-band carrier aggregation requirements for uplink.

1. For Inter-band uplink CA SAR, as the existing SAR test system cannot test the multiple different frequency bands simultaneous Transmission SAR at the same time, we suggest that the conservative “max + max” multi-Tx and SAR scaling method can be used to evaluate the inter-band Uplink SAR from standalone SAR test results of each LTE component band and the conservative “max + max” multi-Tx method to combine the scaled SAR value from each LTE component band as the inter-band Uplink SAR. All Simultaneous Transmission Scenarios will be evaluated independently in the final SAR report.

The Inter band Uplink CA as below table:

Band/ Antenna		LTE B5	LTE B12	LTE B14	LTE B30	LTE B66
		Ant0	Ant0	Ant0	Ant3	Ant3
LTE B2	Ant3	√	√	√		
LTE B4	Ant0		√			
LTE B5	Ant0				√	√
LTE B12	Ant0				√	√
LTE B14	Ant0				√	√



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032311

Rev.: 01

Page: 61 of 123

7.1.6 NR Band Test Configuration

2. NR Band n2/5/30/66/77 support SA and NSA mode. LTE+NR Band operations are possible only with LTE under EN-DC mode and the operations are possible as following table:

Band/ Antenna		n2		n5	n30	n66		n77
		Ant1	Ant3	Ant0	Ant3	Ant1	Ant3	Ant4
LTE B2	Ant1		√		√		√	√
	Ant3			√				
LTE B5	Ant0		√		√		√	√
LTE B12	Ant0		√		√		√	√
LTE B14	Ant0		√		√		√	√
LTE B30	Ant1							√
	Ant3	√		√		√		
LTE B66	Ant1				√		√	√
	Ant3			√				

3. The general information supported by the NR band is as following table:

Band			N2	n5	N30	N66	N77
Modulation	DFT-s-OFDM	QPSK	Yes	Yes	Yes	Yes	Yes
		16QAM	Yes	Yes	Yes	Yes	Yes
		64QAM	Yes	Yes	Yes	Yes	Yes
		256QAM	Yes	Yes	Yes	Yes	Yes
	CP-OFDM	QPSK	Yes	Yes	Yes	Yes	Yes
		16QAM	Yes	Yes	Yes	Yes	Yes
		64QAM	Yes	Yes	Yes	Yes	Yes
		256QAM	Yes	Yes	Yes	Yes	Yes
Duty Cycle			100%	100%	100%	100%	100%

Band	SCS	Bandwidth														
		5Mhz	10Mhz	15Mhz	20Mhz	25Mhz	30Mhz	35Mhz	40Mhz	45Mhz	50Mhz	60Mhz	70Mhz	80Mhz	90Mhz	100Mhz
N2	15KHZ	Yes	Yes	Yes	Yes	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
N5	15KHZ	Yes	Yes	Yes	Yes	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
N30	15KHZ	Yes	Yes	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
N66	15KHZ	Yes	Yes	Yes	Yes	N/A	N/A	N/A	Yes	N/A	N/A	N/A	N/A	N/A	N/A	N/A
N77	15KHZ	N/A	Yes	Yes	Yes	N/A	N/A	N/A	Yes	N/A	Yes	N/A	N/A	N/A	N/A	N/A
N77	30KHZ	N/A	Yes	Yes	Yes	N/A	N/A	N/A	Yes	N/A	Yes	Yes	N/A	Yes	Yes	Yes



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032311

Rev.: 01

Page: 62 of 123

4. For 5G NR test procedure was following step similar FCC KDB 941225 D05:
- a. For DFT-OFDM and CP-OFDM output power measurement reduction, according to 3GPP 38.101 maximum power reduction for power class 3, the CP-OFDM mode will not higher than DFT-OFDM mode, therefore, similar FCC KDB 941225 D05 procedure for other modulation output power for each RB allocation configuration is > not $\frac{1}{2}$ dB higher than the same configuration in DFT-QPSK and the reported SAR for the DFT-QPSK configuration is ≤ 1.45 W/kg; CP-OFDM testing is not required.
 - b. For DFT-OFDM output power measurement reduction, according to 38.101 maximum power reduction for power class 3, for PI/2 BPSK/16QAM/64QMA/256QAM and smaller bandwidth output power will spot check largest channel bandwidth worst RB configuration to ensure the PI/2 BPSK/16QAM/64QMA/256QAM and smaller bandwidth output power will not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth.
 - c. SAR testing start with the largest SCS and largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
 - d. 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
 - e. QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
 - f. PI/2 BPSK/16QAM/64QAM/256QAM output powers according to 3GPP MPR will not $\frac{1}{2}$ dB higher than the same configuration in QPSK, also reported SAR for the QPSK configuration is less than 1.45 W/kg, PI/2 BPSK/16QAM/64QAM/256QAM SAR testing are not required.
 - g. Smaller SCS/bandwidth output power for each RB allocation configuration for this device will not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg, smaller bandwidth SAR testing is not required for this device



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032311

Rev.: 01

Page: 63 of 123

5. MPR

MPR is permanently implemented for this device by the manufacturer. The specific manufacturer target MPR is indicated alongside the SAR results. MPR is enabled for this device, according to 3GPP TS 38.101-1 Section 6.2.2 under Table 6.2.2 -1.

Modulation		MPR (dB)		
		Edge RB allocations	Outer RB allocations	Inner RB allocations
DFT-s-OFDM	PI/2 BPSK	$\leq 3.5^1$	$\leq 1.2^1$	$\leq 0.2^1$
		$\leq 0.5^2$	$\leq 0.5^2$	0^2
	QPSK	≤ 1		0
	16 QAM	≤ 2		≤ 1
	64 QAM	≤ 2.5		
CP-OFDM	256 QAM	≤ 4.5		
	QPSK	≤ 3		≤ 1.5
	16 QAM	≤ 3		≤ 2
	64 QAM	≤ 3.5		
	256 QAM	≤ 6.5		

NOTE 1: Applicable for UE operating in TDD mode with Pi/2 BPSK modulation and UE indicates support for UE capability powerBoosting-pi2BPSK and if the IE powerBoostPi2BPSK is set to 1 and 40 % or less slots in radio frame are used for UL transmission for bands n41,n78. The reference power of 0 dB MPR is 26dBm.

NOTE 2: Applicable for UE operating in FDD mode, or in TDD mode in bands other than n41,n78 with Pi/2 BPSK modulation and if the IE powerBoostPi2BPSK is set to 0 and if more than 40 % of slots in radio frame are used for UL transmission for bands n41,n78.

6. For FDD NR Band operation does not have the fixed UL/DL frame structure, but during the transmitting/ receiving it can be operated in the slot structure of 100% UL duty cycle, we are proposing the conservative way to evaluate SAR at 100% duty cycle. For the purpose of test NR Band standalone SAR, and also test SAR level at 100% TX duty cycle.

7. For 5G NR Sub6GHz SISO Mode, SAR Test plan as below:

1) For 5G NR NSA mode with the same UL EN_DC combination but different DL EN_DC combinations, eg: EN-DC configuration: UL DC_7A_n5 (UL two bands) with DL DC_7C_n5 (DL two bands)

a) The UL EN-DC configuration, including the Tx antenna configuration, RF path, the channel bandwidth and other operating parameters are the same.

b) The maximum output power, including tolerance, for the UL EN-DC configuration with DL two or more bands must be $\leq$ the same UL EN-DC configuration with DL two bands only to qualify for the SAR test exclusion.

8. For EN-DC SAR, as the existing SAR test system cannot test the multiple different frequency bands simultaneous Transmission SAR at the same time, we suggest that the conservative "max + max" multi-Tx and SAR scaling method can be used to evaluate the inter-band Uplink EN-DC SAR from standalone SAR test results of each LTE and NR EN-DC component band and the conservative "max + max" multi-Tx method to combine the scaled SAR value from each EN-DC component band as the inter-band Uplink EN-DC SAR. All Simultaneous Transmission Scenarios will be evaluated independently in the final SAR report.

9. When the reported SAR for and EN DC configuration is greater than 1.2 W/kg, EN DC SAR is also required for other NR based test channels.

10. EN DC SAR is also required for standalone NR configurations greater than 1.2 W/kg when scaled to the EN DC power level.



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032311

Rev.: 01

Page: 64 of 123

8 Test Result

8.1 Measurement of RF Conducted Power

The detailed conducted power table can refer to Appendix E.

Note:

- 1) . The frame-averaged power is linearly proportion to the slot number configured and it is linearly scaled the maximum burst-averaged power based on time slots. The calculated method is shown as below:
Frame-averaged power = $10 \times \log (\text{Burst-averaged power mW} \times \text{Slot used} / 8)$
- 2) . When the maximum output power variation across the required test channels is $> \frac{1}{2}$ dB, instead of the middle channel, the highest output power channel must be used
- 3) . According to FCC guidance, the output power with uplink CA active was measured for the high / middle / low channel configuration with the highest reported SAR for each exposure condition, the power was measured with wideband signal integration over both component carriers.
- 4) . In applying the power measurement procedures of KDB 941225 D05A for DL CA to qualify for UL SAR test exclusion, power measurement is required only for the subset in each row with the largest combination of frequency bands and CCs.
- 5) . Maximum output power measurement is required for each UL CA configuration for the required test channels described in KDB 941225 D05.
- 6) . Conducted power measurement results of downlink LTE carrier aggregation are provided to quantify downlink only carrier aggregation SAR test exclusion per KDB 941225 D05A. Uplink maximum output power is measured with downlink carrier aggregation active, using the channel with highest measured maximum output power when downlink carrier aggregation is inactive, to confirm that when downlink carrier aggregation is active uplink maximum output power remains within the specified tune-up tolerance limits and not more than $\frac{1}{4}$ dB higher than the maximum output power measured when downlink carrier aggregation inactive, therefore SAR evaluation with downlink carrier aggregation can be excluded.
The possible downlink LTE CA combinations supported by this device are as below tables per 3GPP TS 36.101 V15.4.0. The detailed conducted power measurement results of downlink LTE CA are provided in the SAR report per 3GPP TS 36.521-1 V14.4.0. According to KDB 941225 D05A, the downlink only carrier aggregation conditions for this device can be excluded from SAR testing.
The conducted power measurement results of downlink LTE CA Conducted Power are as Appendix E conducted RF output power, so the downlink only carrier aggregation conditions for this device can be excluded from SAR testing.
- 7) . For conducted power of WIFI must be measured at each transmit antenna port according to the DSSS and OFDM transmission configurations in each standalone and aggregated frequency band. For each transmission mode configuration, power must be measured for the highest and lowest channels; and at the mid-band channel(s) when there are at least 3 channels. For configurations with multiple mid-band channels, due to an even number of channels, both channels should be measured. Power measurement is required for the transmission mode configuration with the highest maximum output power specified for production units.
 - 1) When the same highest maximum output power specification applies to multiple transmission modes, the largest channel bandwidth configuration with the lowest order modulation and lowest data rate is measured.
 - 2) When the same highest maximum output power is specified for multiple largest channel bandwidth configurations with the same lowest order modulation or lowest order modulation and lowest data rate, power measurement is required for all equivalent 802.11 configurations with the same maximum output power.



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032311

Rev.: 01

Page: 65 of 123

8.2 Measurement of SAR Data

Note:

- 1) The maximum reported SAR value is marked in **bold**. Graph results refer to Appendix B
- 2) Per KDB447498 D04, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - $\leq 0.8\text{W/kg}$ for 1-g or 2.0W/kg for 10-g respectively, when the transmission band is $\leq 100\text{MHz}$.
 - $\leq 0.6\text{ W/kg}$ or 1.5 W/kg , for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz.
 - $\leq 0.4\text{ W/kg}$ or 1.0 W/kg , for 1-g or 10-g respectively, when the transmission band is $\geq 200\text{ MHz}$.
- 3) Maximum bandwidth does not support at least three non-overlapping channels in certain channel bandwidths. When a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
- 4) For WiFi SAR test, as the highest reported SAR is smaller than 1.2 W/kg , and the tune-up of the other 802.11 modes are not higher than SAR measurement mode, therefore the adjusted SAR is $\leq 1.2\text{ W/kg}$ for other 802.11 modes, SAR test for the other 802.11 modes are not required. For Product specific 10gSAR the highest reported SAR is smaller than 3.0 W/kg , SAR test for the other 802.11 modes are also not required.
- 5) For Wi-Fi 5G, U-NII-1 (5150–5250 MHz) and U-NII-3 (5725-5850 MHz) bands does support hotspot function.
- 6) The simultaneous transmission is reduced by XdB (the detailed power reduced can be referred to Conducted Power Appendix E), therefore, those SAR of simultaneous transmission mode are scaled based on standalone SAR results.



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032311

Rev.: 01

Page: 66 of 123

8.2.1 SAR Result of WCDMA Band II

Ant 3 Test Record										
Test position	Test mode	Test ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1-g (W/kg)	Liquid Temp.(°C)
Head Test Data State3										
Left cheek	RMC	9400/1880	1:1	0.409	-0.11	18.05	19.50	1.396	0.571	22.1
Left tilted	RMC	9400/1880	1:1	0.469	-0.06	18.05	19.50	1.396	0.655	22.1
Right cheek	RMC	9400/1880	1:1	0.727	0.10	18.05	19.50	1.396	1.015	22.1
Right cheek	RMC	9262/1852.4	1:1	0.684	0.07	18.01	19.50	1.409	0.964	22.1
Right cheek	RMC	9538/1907.6	1:1	0.703	-0.06	17.96	19.50	1.426	1.002	22.1
Right tilted	RMC	9400/1880	1:1	0.848	-0.06	18.05	19.50	1.396	1.184	22.1
Right tilted-repeated	RMC	9400/1880	1:1	0.841	0.07	18.05	19.50	1.396	1.174	22.1
Right tilted	RMC	9262/1852.4	1:1	0.781	0.09	18.01	19.50	1.409	1.101	22.1
Right tilted	RMC	9538/1907.6	1:1	0.815	0.13	17.96	19.50	1.426	1.162	22.1
Body worn Test data (Separate 15mm) State0										
Front side	RMC	9400/1880	1:1	0.365	0.14	23.08	24.50	1.387	0.506	22.1
Back side	RMC	9400/1880	1:1	0.526	-0.04	23.08	24.50	1.387	0.729	22.1
Hotspot Test data (Separate 10mm) State4										
Front side	RMC	9400/1880	1:1	0.320	0.13	21.01	22.50	1.409	0.451	22.1
Back side	RMC	9400/1880	1:1	0.564	-0.13	21.01	22.50	1.409	0.795	22.1
Left side	RMC	9400/1880	1:1	0.100	-0.01	21.01	22.50	1.409	0.141	22.1
Top side	RMC	9400/1880	1:1	0.616	-0.07	21.01	22.50	1.409	0.868	22.1
Top side	RMC	9262/1852.4	1:1	0.541	0.13	20.98	22.50	1.419	0.768	22.1
Top side	RMC	9538/1907.6	1:1	0.583	-0.03	20.94	22.50	1.432	0.835	22.1
Test position	Test mode	Test ch./Freq.	Duty Cycle	SAR (W/kg) 10-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled 10-g SAR(W/kg)	Liquid Temp.(°C)
Product specific 10g SAR Test data (Separate 0mm, Sensor on) State1										
Back side	RMC	9400/1880	1:1	1.750	0.11	21.01	22.50	1.409	2.466	22.1
Back side	RMC	9262/1852.4	1:1	1.630	0.18	20.98	22.50	1.419	2.313	22.1
Back side	RMC	9538/1907.6	1:1	1.680	-0.13	20.94	22.50	1.432	2.406	22.1
Top side	RMC	9400/1880	1:1	2.240	-0.15	21.01	22.50	1.409	3.157	22.1
Top side-repeated	RMC	9400/1880	1:1	2.170	0.08	21.01	22.50	1.409	3.058	22.1
Top side	RMC	9262/1852.4	1:1	2.020	0.01	20.98	22.50	1.419	2.866	22.1
Top side	RMC	9538/1907.6	1:1	2.090	-0.19	20.94	22.50	1.432	2.993	22.1
Product specific 10g SAR Test data (Sensor off) State0										
Back side-13mm	RMC	9400/1880	1:1	0.371	0.09	23.08	24.50	1.387	0.514	22.1
Top side-14mm	RMC	9400/1880	1:1	0.382	-0.10	23.08	24.50	1.387	0.530	22.1

Test Position	Test ch./Freq.	Measured SAR (W/kg)	1 st Repeated	Ratio	2 nd Repeated	3 rd Repeated
Right tilted	9400/1880	0.848	0.841	1.008	N/A	N/A
Top side-0mm	9400/1880	2.240	2.170	1.032	N/A	N/A

Note: 1) When the original highest measured SAR is ≥ 0.80 W/kg, the measurement was repeated once.

2) A second repeated measurement was preformed only if the ratio of largest to smallest SAR for the original and first repeated measurements was > 1.20 or when the original or repeated measurement was ≥ 1.45 W/kg ($\sim 10\%$ from the 1-g SAR limit).

3) A third repeated measurement was preformed only if the original, first or second repeated measurement was ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

4) Repeated measurements are not required when the original highest measured SAR is < 0.80 W/kg

5) The same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds. The repeated measurement results must be clearly identified in the SAR report.

5) The same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds. The repeated measurement results must be clearly identified in the SAR report.



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032311

Rev.: 01

Page: 68 of 123

8.2.3 SAR Result of WCDMA Band V

Ant 0 Test Record										
Test position	Test mode	Test ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1-g (W/kg)	Liquid Temp.(°C)
Head Test Data State3										
Left cheek	RMC	4182/836.4	1:1	0.268	0.1	23.93	24.50	1.140	0.306	22.2
Left tilted	RMC	4182/836.4	1:1	0.160	0.12	23.93	24.50	1.140	0.182	22.2
Right cheek	RMC	4182/836.4	1:1	0.339	0.06	23.93	24.50	1.140	0.387	22.2
Right tilted	RMC	4182/836.4	1:1	0.196	0.02	23.93	24.50	1.140	0.223	22.2
Body worn Test data(Separate 15mm) State0										
Front side	RMC	4182/836.4	1:1	0.295	0.17	23.93	24.50	1.140	0.336	22.2
Back side	RMC	4182/836.4	1:1	0.336	-0.16	23.93	24.50	1.140	0.383	22.2
Hotspot Test data(Separate 10mm) State4										
Front side	RMC	4182/836.4	1:1	0.348	0.01	23.93	24.50	1.140	0.397	22.2
Back side	RMC	4182/836.4	1:1	0.368	0.09	23.93	24.50	1.140	0.420	22.2
Left side	RMC	4182/836.4	1:1	0.174	-0.16	23.93	24.50	1.140	0.198	22.2
Right side	RMC	4182/836.4	1:1	0.282	0.03	23.93	24.50	1.140	0.322	22.2
Bottom side	RMC	4182/836.4	1:1	0.434	-0.16	23.93	24.50	1.140	0.495	22.2

Ant 3 Test Record											
Test position	BW.	Test mode	Test ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1-g (W/kg)	Liquid Temp.(°C)
Head Test Data (1RB) State3											
Left cheek	20	QPSK 1_0	18900/1880	1:1	0.343	0.10	18.05	19.50	1.396	0.479	22.1
Left tilted	20	QPSK 1_0	18900/1880	1:1	0.411	-0.02	18.05	19.50	1.396	0.574	22.1
Right cheek	20	QPSK 1_0	18900/1880	1:1	0.681	-0.06	18.05	19.50	1.396	0.951	22.1
Right cheek	20	QPSK 1_0	18700/1860	1:1	0.665	0.17	17.84	19.50	1.466	0.975	22.1
Right cheek	20	QPSK 1_0	19100/1900	1:1	0.643	-0.15	17.97	19.50	1.422	0.915	22.1
Right tilted	20	QPSK 1_0	18900/1880	1:1	0.771	-0.10	18.05	19.50	1.396	1.077	22.1
Right tilted	20	QPSK 1_0	18700/1860	1:1	0.714	-0.14	17.84	19.50	1.466	1.046	22.1
Right tilted	20	QPSK 1_0	19100/1900	1:1	0.730	-0.05	17.97	19.50	1.422	1.038	22.1
Head Test Data (50%RB) State3											
Left cheek	20	QPSK 50_0	18900/1880	1:1	0.261	0.04	17.89	19.50	1.449	0.378	22.1
Left tilted	20	QPSK 50_0	18900/1880	1:1	0.332	-0.03	17.89	19.50	1.449	0.481	22.1
Right cheek	20	QPSK 50_0	18900/1880	1:1	0.548	0.14	17.89	19.50	1.449	0.794	22.1
Right tilted	20	QPSK 50_0	18900/1880	1:1	0.610	-0.06	17.89	19.50	1.449	0.884	22.1
Right tilted	20	QPSK 50_0	18700/1860	1:1	0.567	0.09	17.84	19.50	1.466	0.831	22.1
Right tilted	20	QPSK 50_0	19100/1900	1:1	0.572	0.14	17.85	19.50	1.462	0.836	22.1
Head Test Data (100%RB) State3											
Right cheek	20	QPSK 100_0	18900/1880	1:1	0.558	-0.11	17.79	19.50	1.483	0.827	22.1
Right tilted	20	QPSK 100_0	18900/1880	1:1	0.563	-0.06	17.79	19.50	1.483	0.835	22.1
Head Test Data (1RB) State3 (UL CA & ENDC)											
Left cheek	20	QPSK 1_0	18900/1880	1:1	0.343	0.10	18.05	17.00	0.785	0.269	22.1
Left tilted	20	QPSK 1_0	18900/1880	1:1	0.411	-0.02	18.05	17.00	0.785	0.323	22.1
Right cheek	20	QPSK 1_0	18900/1880	1:1	0.681	-0.06	18.05	17.00	0.785	0.535	22.1
Right cheek	20	QPSK 1_0	18700/1860	1:1	0.665	0.17	17.84	17.00	0.824	0.548	22.1
Right cheek	20	QPSK 1_0	19100/1900	1:1	0.643	-0.15	17.97	17.00	0.800	0.514	22.1
Right tilted	20	QPSK 1_0	18900/1880	1:1	0.771	-0.10	18.05	17.00	0.785	0.605	22.1
Right tilted	20	QPSK 1_0	18700/1860	1:1	0.714	-0.14	17.84	17.00	0.824	0.588	22.1
Right tilted	20	QPSK 1_0	19100/1900	1:1	0.730	-0.05	17.97	17.00	0.800	0.584	22.1
Head Test Data (50%RB) State3 (UL CA & ENDC)											
Left cheek	20	QPSK 50_0	18900/1880	1:1	0.261	0.04	17.89	17.00	0.815	0.213	22.1
Left tilted	20	QPSK 50_0	18900/1880	1:1	0.332	-0.03	17.89	17.00	0.815	0.270	22.1
Right cheek	20	QPSK 50_0	18900/1880	1:1	0.548	0.14	17.89	17.00	0.815	0.446	22.1
Right tilted	20	QPSK 50_0	18900/1880	1:1	0.610	-0.06	17.89	17.00	0.815	0.497	22.1
Right tilted	20	QPSK 50_0	18700/1860	1:1	0.567	0.09	17.84	17.00	0.824	0.467	22.1
Right tilted	20	QPSK 50_0	19100/1900	1:1	0.572	0.14	17.85	17.00	0.822	0.470	22.1
Head Test Data (100%RB) State3 (UL CA & ENDC)											
Right cheek	20	QPSK 100_0	18900/1880	1:1	0.558	-0.11	17.79	17.00	0.834	0.465	22.1
Right tilted	20	QPSK 100_0	18900/1880	1:1	0.563	-0.06	17.79	17.00	0.834	0.469	22.1
Body worn Test data (Separate 15mm 1RB) State0											
Front side	20	QPSK 1_0	18900/1880	1:1	0.303	-0.04	23.58	25.00	1.387	0.420	22.1
Back side	20	QPSK 1_0	18900/1880	1:1	0.470	-0.04	23.58	25.00	1.387	0.652	22.1
Body worn Test data (Separate 15mm 50%RB) State0											
Front side	20	QPSK 50_0	18900/1880	1:1	0.259	-0.15	22.41	24.00	1.442	0.374	22.1
Back side	20	QPSK 50_0	18900/1880	1:1	0.408	0.04	22.41	24.00	1.442	0.588	22.1
Hotspot Test data (Separate 10mm 1RB) State4											



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032311

Rev.: 01

Page: 70 of 123

Front side	20	QPSK 1_0	18900/1880	1:1	0.329	0.16	21.54	23.00	1.400	0.460	22.1
Back side	20	QPSK 1_0	18900/1880	1:1	0.535	-0.10	21.54	23.00	1.400	0.749	22.1
Left side	20	QPSK 1_0	18900/1880	1:1	0.100	-0.01	21.54	23.00	1.400	0.140	22.1
Top side	20	QPSK 1_0	18900/1880	1:1	0.588	-0.18	21.54	23.00	1.400	0.823	22.1
Top side	20	QPSK 1_0	18700/1860	1:1	0.540	0.17	21.34	23.00	1.466	0.791	22.1
Top side	20	QPSK 1_0	19100/1900	1:1	0.559	0.11	21.47	23.00	1.422	0.795	22.1
Hotspot Test data (Separate 10mm 50%RB) State4											
Front side	20	QPSK 50_0	18900/1880	1:1	0.252	0.00	21.36	23.00	1.459	0.368	22.1
Back side	20	QPSK 50_0	18900/1880	1:1	0.408	-0.09	21.36	23.00	1.459	0.595	22.1
Left side	20	QPSK 50_0	18900/1880	1:1	0.075	-0.01	21.36	23.00	1.459	0.109	22.1
Top side	20	QPSK 50_0	18900/1880	1:1	0.466	-0.12	21.36	23.00	1.459	0.680	22.1
Hotspot Test data (Separate 10mm 100%RB) State4											
Top side	20	QPSK 100_0	18900/1880	1:1	0.488	0.16	21.29	23.00	1.483	0.723	22.1
Test position	BW.	Test mode	Test ch./Freq.	Duty Cycle	SAR (W/kg) 10-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled 10-g SAR(W/kg)	Liquid Temp.(°C)
Product specific 10g SAR Test data (Separate 0mm 1RB, Sensor on) State1											
Top side	20	QPSK 1_0	18900/1880	1:1	2.070	0.01	21.54	23.00	1.400	2.897	22.1
Top side-repeated	20	QPSK 1_0	18900/1880	1:1	2.030	0.09	21.54	23.00	1.400	2.841	22.1
Top side	20	QPSK 1_0	18700/1860	1:1	1.810	0.06	21.34	23.00	1.466	2.653	22.1
Top side	20	QPSK 1_0	19100/1900	1:1	1.970	-0.14	21.47	23.00	1.422	2.802	22.1
Product specific 10g SAR Test data (Separate 0mm 50%RB, Sensor on) State1											
Top side	20	QPSK 50_0	18900/1880	1:1	1.830	-0.17	21.36	23.00	1.459	2.670	22.1
Top side	20	QPSK 50_0	18700/1860	1:1	1.580	0.08	21.34	23.00	1.466	2.316	22.1
Top side	20	QPSK 50_0	19100/1900	1:1	1.700	-0.06	21.34	23.00	1.466	2.491	22.1
Product specific 10g SAR Test data (Separate 0mm 100%RB, Sensor on) State1											
Top side	20	QPSK 100_0	18900/1880	1:1	1.820	0.19	21.29	23.00	1.483	2.698	22.1
Product specific 10g SAR Test data (Separate 0mm, Sensor off) State0											
Top side-14mm	20	QPSK 1_0	18900/1880	1:1	0.233	0.01	23.58	25.00	1.387	0.323	22.1
Ant 1 Test Record											
Test position	BW.	Test mode	Test ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1-g (W/kg)	Liquid Temp.(°C)
Head Test Data (1RB) State3											
Left cheek	20	QPSK 1_0	18900/1880	1:1	0.223	0.17	23.72	25.00	1.343	0.299	22.1
Left tilted	20	QPSK 1_0	18900/1880	1:1	0.161	0.15	23.72	25.00	1.343	0.216	22.1
Right cheek	20	QPSK 1_0	18900/1880	1:1	0.193	0.03	23.72	25.00	1.343	0.259	22.1
Right tilted	20	QPSK 1_0	18900/1880	1:1	0.159	-0.17	23.72	25.00	1.343	0.213	22.1
Head Test Data (50%RB) State3											
Left cheek	20	QPSK 50_0	18900/1880	1:1	0.218	-0.08	22.55	24.00	1.396	0.304	22.1
Left tilted	20	QPSK 50_0	18900/1880	1:1	0.149	0.17	22.55	24.00	1.396	0.208	22.1
Right cheek	20	QPSK 50_0	18900/1880	1:1	0.178	-0.11	22.55	24.00	1.396	0.249	22.1
Right tilted	20	QPSK 50_0	18900/1880	1:1	0.144	0.12	22.55	24.00	1.396	0.201	22.1
Body worn Test data (Separate 15mm 1RB) State0											
Front side	20	QPSK 1_0	18900/1880	1:1	0.291	-0.16	23.72	25.00	1.343	0.391	22.1
Back side	20	QPSK 1_0	18900/1880	1:1	0.397	0.13	23.72	25.00	1.343	0.533	22.1
Body worn Test data (Separate 15mm 50%RB) State0											
Front side	20	QPSK 50_0	18900/1880	1:1	0.265	-0.17	22.55	24.00	1.396	0.370	22.1
Back side	20	QPSK 50_0	18900/1880	1:1	0.355	-0.04	22.55	24.00	1.396	0.496	22.1
Hotspot Test data (Separate 10mm 1RB) State4											
Front side	20	QPSK 1_0	18900/1880	1:1	0.475	0.13	23.72	25.00	1.343	0.638	22.1

5) The same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds. The repeated measurement results must be clearly identified in the SAR report.



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032311

Rev.: 01

Page: 72 of 123

8.2.5 SAR Result of LTE Band 5

Ant 0 Test Record											
Test position	BW.	Test mode	Test ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1-g (W/kg)	Liquid Temp.(°C)
Head Test Data (1RB) State3											
Left cheek	10	QPSK 1_0	20525/836.5	1:1	0.272	-0.06	24.26	25.00	1.186	0.323	22.2
Left tilted	10	QPSK 1_0	20525/836.5	1:1	0.162	0.17	24.26	25.00	1.186	0.192	22.2
Right cheek	10	QPSK 1_0	20525/836.5	1:1	0.319	-0.18	24.26	25.00	1.186	0.378	22.2
Right cheek-UL CA_5B	10	QPSK 1_0	20501/834.1	1:1	0.306	0.09	24.22	25.00	1.197	0.366	22.2
		QPSK 1_49	20600/844	1:1							
Right tilted	10	QPSK 1_0	20525/836.5	1:1	0.191	-0.13	24.26	25.00	1.186	0.226	22.2
Head Test Data (50%RB) State3											
Left cheek	10	QPSK 25_0	20525/836.5	1:1	0.218	0.05	22.85	24.00	1.303	0.284	22.2
Left tilted	10	QPSK 25_0	20525/836.5	1:1	0.130	0.04	22.85	24.00	1.303	0.169	22.2
Right cheek	10	QPSK 25_0	20525/836.5	1:1	0.253	0.03	22.85	24.00	1.303	0.330	22.2
Right tilted	10	QPSK 25_0	20525/836.5	1:1	0.151	-0.01	22.85	24.00	1.303	0.197	22.2
Body worn Test data (Separate 15mm 1RB) State0											
Front side	10	QPSK 1_0	20525/836.5	1:1	0.311	0.18	24.26	25.00	1.186	0.369	22.2
Back side	10	QPSK 1_0	20525/836.5	1:1	0.349	-0.17	24.26	25.00	1.186	0.414	22.2
Right cheek-UL CA_5B	10	QPSK 1_0	20501/834.1	1:1	0.337	-0.08	24.22	25.00	1.197	0.403	22.2
		QPSK 1_49	20600/844	1:1							
Body worn Test data (Separate 15mm 50%RB) State0											
Front side	10	QPSK 25_0	20525/836.5	1:1	0.242	-0.01	22.85	24.00	1.303	0.315	22.2
Back side	10	QPSK 25_0	20525/836.5	1:1	0.271	0.04	22.85	24.00	1.303	0.353	22.2
Hotspot Test data (Separate 10mm 1RB) State4											
Front side	10	QPSK 1_0	20525/836.5	1:1	0.355	-0.02	24.26	25.00	1.186	0.421	22.2
Back side	10	QPSK 1_0	20525/836.5	1:1	0.385	0.04	24.26	25.00	1.186	0.457	22.2
Left side	10	QPSK 1_0	20525/836.5	1:1	0.188	-0.14	24.26	25.00	1.186	0.223	22.2
Right side	10	QPSK 1_0	20525/836.5	1:1	0.310	0.18	24.26	25.00	1.186	0.368	22.2
Bottom side	10	QPSK 1_0	20525/836.5	1:1	0.466	-0.06	24.26	25.00	1.186	0.553	22.2
Right cheek-UL CA_5B	10	QPSK 1_0	20501/834.1	1:1	0.452	0.03	24.22	25.00	1.197	0.541	22.2
		QPSK 1_49	20600/844	1:1							
Hotspot Test data (Separate 10mm 50%RB) State4											
Front side	10	QPSK 25_0	20525/836.5	1:1	0.273	-0.06	22.85	24.00	1.303	0.356	22.2
Back side	10	QPSK 25_0	20525/836.5	1:1	0.307	0.05	22.85	24.00	1.303	0.400	22.2
Left side	10	QPSK 25_0	20525/836.5	1:1	0.147	0.02	22.85	24.00	1.303	0.192	22.2
Right side	10	QPSK 25_0	20525/836.5	1:1	0.239	-0.02	22.85	24.00	1.303	0.311	22.2
Bottom side	10	QPSK 25_0	20525/836.5	1:1	0.362	0.19	22.85	24.00	1.303	0.472	22.2



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032311

Rev.: 01

Page: 73 of 123

8.2.6 SAR Result of LTE Band 7

Ant 3 Test Record											
Test position	BW.	Test mode	Test ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1-g (W/kg)	Liquid Temp.(℃)
Head Test Data (1RB) State3											
Left cheek	20	QPSK 1_0	21100/2535	1:1	0.161	0.13	19.80	21.00	1.318	0.212	22.3
Left tilted	20	QPSK 1_0	21100/2535	1:1	0.252	0.14	19.80	21.00	1.318	0.332	22.3
Right cheek	20	QPSK 1_0	21100/2535	1:1	0.652	0.15	19.80	21.00	1.318	0.860	22.3
Right cheek	20	QPSK 1_0	20850/2510	1:1	0.634	-0.04	19.70	21.00	1.349	0.855	22.3
Right cheek	20	QPSK 1_0	21350/2560	1:1	0.619	0.02	19.68	21.00	1.355	0.839	22.3
Right tilted	20	QPSK 1_0	21100/2535	1:1	0.729	-0.02	19.80	21.00	1.318	0.961	22.3
Right tilted	20	QPSK 1_0	20850/2510	1:1	0.700	-0.13	19.70	21.00	1.349	0.944	22.3
Right tilted	20	QPSK 1_0	21350/2560	1:1	0.689	-0.14	19.68	21.00	1.355	0.934	22.3
Head Test Data (50%RB) State3											
Left cheek	20	QPSK 50_0	21100/2535	1:1	0.154	-0.10	19.77	21.00	1.327	0.204	22.3
Left tilted	20	QPSK 50_0	21100/2535	1:1	0.208	-0.03	19.77	21.00	1.327	0.276	22.3
Right cheek	20	QPSK 50_0	21100/2535	1:1	0.581	0.19	19.77	21.00	1.327	0.771	22.3
Right tilted	20	QPSK 50_0	21100/2535	1:1	0.666	0.02	19.77	21.00	1.327	0.884	22.3
Right tilted	20	QPSK 50_0	20850/2510	1:1	0.649	0.17	19.72	21.00	1.343	0.871	22.3
Right tilted	20	QPSK 50_0	21350/2560	1:1	0.611	-0.18	19.71	21.00	1.346	0.822	22.3
Head Test Data (100%RB) State3											
Right cheek	20	QPSK 100_0	21100/2535	1:1	0.487	0.18	19.58	21.00	1.387	0.675	22.3
Right tilted	20	QPSK 100_0	21100/2535	1:1	0.564	-0.17	19.58	21.00	1.387	0.782	22.3
Body worn Test data (Separate 15mm 1RB) State0											
Front side	20	QPSK 1_0	21100/2535	1:1	0.175	-0.17	23.82	25.00	1.312	0.230	22.3
Back side	20	QPSK 1_0	21100/2535	1:1	0.336	-0.13	23.82	25.00	1.312	0.441	22.3
Body worn Test data (Separate 15mm 50%RB) State0											
Front side	20	QPSK 50_0	21100/2535	1:1	0.167	-0.03	22.81	24.00	1.315	0.220	22.3
Back side	20	QPSK 50_0	21100/2535	1:1	0.325	-0.12	22.81	24.00	1.315	0.427	22.3
Hotspot Test data (Separate 10mm 1RB) State4											
Front side	20	QPSK 1_0	21100/2535	1:1	0.315	-0.17	23.82	25.00	1.312	0.413	22.3
Back side	20	QPSK 1_0	21100/2535	1:1	0.782	0.08	23.82	25.00	1.312	1.026	22.3
Back side	20	QPSK 1_0	20850/2510	1:1	0.768	-0.07	23.72	25.00	1.343	1.031	22.3
Back side	20	QPSK 1_0	21350/2560	1:1	0.772	-0.03	23.71	25.00	1.346	1.039	22.3
Left side	20	QPSK 1_0	21100/2535	1:1	0.358	-0.19	23.82	25.00	1.312	0.470	22.3
Top side	20	QPSK 1_0	21100/2535	1:1	0.878	0.17	23.82	25.00	1.312	1.152	22.3
Top side-repeated	20	QPSK 1_0	21100/2535	1:1	0.872	0.06	23.82	25.00	1.312	1.144	22.3
Top side	20	QPSK 1_0	20850/2510	1:1	0.816	0.19	23.72	25.00	1.343	1.096	22.3
Top side	20	QPSK 1_0	21350/2560	1:1	0.855	0.03	23.71	25.00	1.346	1.151	22.3
Hotspot Test data (Separate 10mm 50%RB) State4											
Front side	20	QPSK 50_0	21100/2535	1:1	0.269	-0.06	22.81	24.00	1.315	0.354	22.3
Back side	20	QPSK 50_0	21100/2535	1:1	0.683	-0.07	22.81	24.00	1.315	0.898	22.3
Back side	20	QPSK 50_0	20850/2510	1:1	0.651	-0.02	22.75	24.00	1.334	0.868	22.3
Back side	20	QPSK 50_0	21350/2560	1:1	0.643	-0.18	22.76	24.00	1.330	0.855	22.3
Left side	20	QPSK 50_0	21100/2535	1:1	0.282	0.03	22.81	24.00	1.315	0.371	22.3
Top side	20	QPSK 50_0	21100/2535	1:1	0.763	-0.09	22.81	24.00	1.315	1.004	22.3
Top side	20	QPSK 50_0	20850/2510	1:1	0.751	0.09	22.75	24.00	1.334	1.001	22.3
Top side	20	QPSK 50_0	21350/2560	1:1	0.741	0.06	22.76	24.00	1.330	0.986	22.3
Hotspot Test data (Separate 10mm 100%RB) State4											
Back side	20	QPSK 100_0	21100/2535	1:1	0.643	-0.18	22.61	24.00	1.377	0.886	22.3
Top side	20	QPSK 100_0	21100/2535	1:1	0.719	0.11	22.61	24.00	1.377	0.990	22.3



Rev.: 01

Page: 74 of 123

Test Position	Test ch./Freq.	Measured SAR (W/kg)	1 st Repeated	Ratio	2 nd Repeated	3 rd Repeated
Top side	21100/2535	0.878	0.872	1.007	N/A	N/A

Note: 1) When the original highest measured SAR is ≥ 0.80 W/kg, the measurement was repeated once.

2) A second repeated measurement was performed only if the ratio of largest to smallest SAR for the original and first repeated measurements was > 1.20 or when the original or repeated measurement was ≥ 1.45 W/kg ($\sim 10\%$ from the 1-g SAR limit).

3) A third repeated measurement was performed only if the original, first or second repeated measurement was ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

4) Repeated measurements are not required when the original highest measured SAR is $< 0.80 \text{ W/kg}$

5) The same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds. The repeated measurement results must be clearly identified in the SAR report.



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032311

Rev.: 01

Page: 75 of 123

8.2.7 SAR Result of LTE Band 12

Ant 0 Test Record											
Test position	BW.	Test mode	Test ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1-g (W/kg)	Liquid Temp.(°C)
Head Test Data (1RB) State3											
Left cheek	10	QPSK 1_0	23095/707.5	1:1	0.147	0.14	24.11	25.00	1.227	0.180	22.2
Left tilted	10	QPSK 1_0	23095/707.5	1:1	0.091	0.05	24.11	25.00	1.227	0.112	22.2
Right cheek	10	QPSK 1_0	23095/707.5	1:1	0.164	0.03	24.11	25.00	1.227	0.201	22.2
Right tilted	10	QPSK 1_0	23095/707.5	1:1	0.074	-0.07	24.11	25.00	1.227	0.091	22.2
Head Test Data (50%RB) State3											
Left cheek	10	QPSK 25_0	23095/707.5	1:1	0.116	-0.15	23.02	24.00	1.253	0.145	22.2
Left tilted	10	QPSK 25_0	23095/707.5	1:1	0.064	-0.16	23.02	24.00	1.253	0.080	22.2
Right cheek	10	QPSK 25_0	23095/707.5	1:1	0.125	-0.05	23.02	24.00	1.253	0.157	22.2
Right tilted	10	QPSK 25_0	23095/707.5	1:1	0.057	-0.04	23.02	24.00	1.253	0.071	22.2
Body worn Test data (Separate 15mm 1RB) State0											
Front side	10	QPSK 1_0	23095/707.5	1:1	0.258	-0.11	24.11	25.00	1.227	0.317	22.2
Back side	10	QPSK 1_0	23095/707.5	1:1	0.336	-0.01	24.11	25.00	1.227	0.412	22.2
Body worn Test data (Separate 15mm 50%RB) State0											
Front side	10	QPSK 25_0	23095/707.5	1:1	0.209	0.07	23.02	24.00	1.253	0.262	22.2
Back side	10	QPSK 25_0	23095/707.5	1:1	0.277	0.06	23.02	24.00	1.253	0.347	22.2
Hotspot Test data (Separate 10mm 1RB) State4											
Front side	10	QPSK 1_0	23095/707.5	1:1	0.226	0.19	24.11	25.00	1.227	0.277	22.2
Back side	10	QPSK 1_0	23095/707.5	1:1	0.342	-0.13	24.11	25.00	1.227	0.420	22.2
Left side	10	QPSK 1_0	23095/707.5	1:1	0.207	0.06	24.11	25.00	1.227	0.254	22.2
Right side	10	QPSK 1_0	23095/707.5	1:1	0.320	-0.15	24.11	25.00	1.227	0.393	22.2
Bottom side	10	QPSK 1_0	23095/707.5	1:1	0.172	0.17	24.11	25.00	1.227	0.211	22.2
Hotspot Test data (Separate 10mm 50%RB) State4											
Front side	10	QPSK 25_0	23095/707.5	1:1	0.191	-0.07	23.02	24.00	1.253	0.239	22.2
Back side	10	QPSK 25_0	23095/707.5	1:1	0.263	0.14	23.02	24.00	1.253	0.330	22.2
Left side	10	QPSK 25_0	23095/707.5	1:1	0.160	0.04	23.02	24.00	1.253	0.201	22.2
Right side	10	QPSK 25_0	23095/707.5	1:1	0.243	-0.16	23.02	24.00	1.253	0.305	22.2
Bottom side	10	QPSK 25_0	23095/707.5	1:1	0.140	-0.13	23.02	24.00	1.253	0.175	22.2



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032311

Rev.: 01

Page: 76 of 123

8.2.8 SAR Result of LTE Band 14

Ant 0 Test Record											
Test position	BW.	Test mode	Test ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1-g (W/kg)	Liquid Temp.(°C)
Head Test Data (1RB) State3											
Left cheek	10	QPSK 1_0	23330/793	1:1	0.200	0.06	24.15	25.00	1.216	0.243	22.2
Left tilted	10	QPSK 1_0	23330/793	1:1	0.109	0.12	24.15	25.00	1.216	0.133	22.2
Right cheek	10	QPSK 1_0	23330/793	1:1	0.206	0.14	24.15	25.00	1.216	0.251	22.2
Right tilted	10	QPSK 1_0	23330/793	1:1	0.142	0.09	24.15	25.00	1.216	0.173	22.2
Head Test Data (50%RB) State3											
Left cheek	10	QPSK 25_0	23330/793	1:1	0.165	0.03	23.02	24.00	1.253	0.207	22.2
Left tilted	10	QPSK 25_0	23330/793	1:1	0.103	0.09	23.02	24.00	1.253	0.129	22.2
Right cheek	10	QPSK 25_0	23330/793	1:1	0.169	0.08	23.02	24.00	1.253	0.212	22.2
Right tilted	10	QPSK 25_0	23330/793	1:1	0.118	-0.06	23.02	24.00	1.253	0.148	22.2
Body worn Test data (Separate 15mm 1RB) State0											
Front side	10	QPSK 1_0	23330/793	1:1	0.270	0.18	24.15	25.00	1.216	0.328	22.2
Back side	10	QPSK 1_0	23330/793	1:1	0.319	-0.17	24.15	25.00	1.216	0.388	22.2
Body worn Test data (Separate 15mm 50%RB) State0											
Front side	10	QPSK 25_0	23330/793	1:1	0.220	-0.11	23.02	24.00	1.253	0.276	22.2
Back side	10	QPSK 25_0	23330/793	1:1	0.257	0.12	23.02	24.00	1.253	0.322	22.2
Hotspot Test data (Separate 10mm 1RB) State4											
Front side	10	QPSK 1_0	23330/793	1:1	0.259	0.01	24.15	25.00	1.216	0.315	22.2
Back side	10	QPSK 1_0	23330/793	1:1	0.319	-0.08	24.15	25.00	1.216	0.388	22.2
Left side	10	QPSK 1_0	23330/793	1:1	0.165	0.02	24.15	25.00	1.216	0.201	22.2
Right side	10	QPSK 1_0	23330/793	1:1	0.309	0.01	24.15	25.00	1.216	0.376	22.2
Bottom side	10	QPSK 1_0	23330/793	1:1	0.296	-0.04	24.15	25.00	1.216	0.360	22.2
Hotspot Test data (Separate 10mm 50%RB) State4											
Front side	10	QPSK 25_0	23330/793	1:1	0.215	0.14	23.02	24.00	1.253	0.269	22.2
Back side	10	QPSK 25_0	23330/793	1:1	0.261	0.13	23.02	24.00	1.253	0.327	22.2
Left side	10	QPSK 25_0	23330/793	1:1	0.138	0.01	23.02	24.00	1.253	0.173	22.2
Right side	10	QPSK 25_0	23330/793	1:1	0.247	-0.09	23.02	24.00	1.253	0.310	22.2
Bottom side	10	QPSK 25_0	23330/793	1:1	0.198	-0.02	23.02	24.00	1.253	0.248	22.2

Ant 3 Test Record											
Test position	BW.	Test mode	Test ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1-g (W/kg)	Liquid Temp.(°C)
Head Test Data (1RB) State3											
Left cheek	10	QPSK 1_0	27710/2310	1:1	0.236	-0.13	17.81	18.50	1.172	0.277	22.2
Left tilted	10	QPSK 1_0	27710/2310	1:1	0.310	0.06	17.81	18.50	1.172	0.363	22.2
Right cheek	10	QPSK 1_0	27710/2310	1:1	0.734	0.01	17.81	18.50	1.172	0.860	22.2
Right tilted	10	QPSK 1_0	27710/2310	1:1	0.964	-0.01	17.81	18.50	1.172	1.130	22.2
Right tilted-repeated	10	QPSK 1_0	27710/2310	1:1	0.952	0.08	17.81	18.50	1.172	1.116	22.2
Head Test Data (50%RB) State3											
Left cheek	10	QPSK 25_0	27710/2310	1:1	0.235	0.07	17.65	18.50	1.216	0.286	22.2
Left tilted	10	QPSK 25_0	27710/2310	1:1	0.299	-0.02	17.65	18.50	1.216	0.364	22.2
Right cheek	10	QPSK 25_0	27710/2310	1:1	0.706	-0.14	17.65	18.50	1.216	0.859	22.2
Right tilted	10	QPSK 25_0	27710/2310	1:1	0.835	-0.07	17.65	18.50	1.216	1.016	22.2
Head Test Data (100%RB) State3											
Right cheek	10	QPSK 50_0	27710/2310	1:1	0.718	0.15	17.41	18.50	1.285	0.923	22.2
Right tilted	10	QPSK 50_0	27710/2310	1:1	0.798	0.02	17.41	18.50	1.285	1.026	22.2
Head Test Data (1RB) State3 (UL CA & ENDC)											
Left cheek	10	QPSK 1_0	27710/2310	1:1	0.236	-0.13	17.81	15.50	0.587	0.139	22.2
Left tilted	10	QPSK 1_0	27710/2310	1:1	0.310	0.06	17.81	15.50	0.587	0.182	22.2
Right cheek	10	QPSK 1_0	27710/2310	1:1	0.734	0.01	17.81	15.50	0.587	0.431	22.2
Right tilted	10	QPSK 1_0	27710/2310	1:1	0.964	-0.01	17.81	15.50	0.587	0.566	22.2
Right tilted-repeated	10	QPSK 1_0	27710/2310	1:1	0.952	0.08	17.81	15.50	0.587	0.559	22.2
Head Test Data (50%RB) State3 (UL CA & ENDC)											
Left cheek	10	QPSK 25_0	27710/2310	1:1	0.235	0.07	17.65	15.50	0.610	0.143	22.2
Left tilted	10	QPSK 25_0	27710/2310	1:1	0.299	-0.02	17.65	15.50	0.610	0.182	22.2
Right cheek	10	QPSK 25_0	27710/2310	1:1	0.706	-0.14	17.65	15.50	0.610	0.430	22.2
Right tilted	10	QPSK 25_0	27710/2310	1:1	0.835	-0.07	17.65	15.50	0.610	0.509	22.2
Head Test Data (100%RB) State3 (UL CA & ENDC)											
Right cheek	10	QPSK 50_0	27710/2310	1:1	0.718	0.15	17.41	15.50	0.644	0.463	22.2
Right tilted	10	QPSK 50_0	27710/2310	1:1	0.798	0.02	17.41	15.50	0.644	0.514	22.2
Body worn Test data (Separate 15mm 1RB) State0											
Front side	10	QPSK 1_0	27710/2310	1:1	0.396	0.04	23.83	24.50	1.167	0.462	22.2
Back side	10	QPSK 1_0	27710/2310	1:1	0.723	-0.15	23.83	24.50	1.167	0.844	22.2
Body worn Test data (Separate 15mm 50%RB) State0											
Front side	10	QPSK 25_0	27710/2310	1:1	0.282	0.08	22.68	23.50	1.208	0.341	22.2
Back side	10	QPSK 25_0	27710/2310	1:1	0.574	-0.09	22.68	23.50	1.208	0.693	22.2
Body worn Test data (Separate 15mm 100%RB) State0											
Back side	10	QPSK 50_0	27710/2310	1:1	0.547	0.17	22.47	23.50	1.268	0.693	22.2
Body worn Test data (Separate 15mm 1RB) State1 (UL CA & ENDC)											
Front side	10	QPSK 1_0	27710/2310	1:1	0.396	0.04	23.83	18.50	0.293	0.116	22.2
Back side	10	QPSK 1_0	27710/2310	1:1	0.723	-0.15	23.83	18.50	0.293	0.212	22.2
Body worn Test data (Separate 15mm 50%RB) State1 (UL CA & ENDC)											
Front side	10	QPSK 25_0	27710/2310	1:1	0.282	0.08	22.68	18.50	0.382	0.108	22.2
Back side	10	QPSK 25_0	27710/2310	1:1	0.574	-0.09	22.68	18.50	0.382	0.219	22.2
Body worn Test data (Separate 15mm 100%RB) State1 (UL CA & ENDC)											
Back side	10	QPSK 50_0	27710/2310	1:1	0.547	0.17	22.47	18.50	0.401	0.219	22.2
Hotspot Test data (Separate 10mm 1RB) State4											



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032311

Rev.: 01

Page: 78 of 123

Front side	10	QPSK 1_0	27710/2310	1:1	0.415	-0.11	20.77	21.50	1.183	0.491	22.2
Back side	10	QPSK 1_0	27710/2310	1:1	0.690	-0.03	20.77	21.50	1.183	0.816	22.2
Left side	10	QPSK 1_0	27710/2310	1:1	0.181	-0.13	20.77	21.50	1.183	0.214	22.2
Top side	10	QPSK 1_0	27710/2310	1:1	0.631	-0.14	20.77	21.50	1.183	0.746	22.2
Hotspot Test data (Separate 10mm 50%RB) State4											
Front side	10	QPSK 25_0	27710/2310	1:1	0.389	0.03	20.64	21.50	1.219	0.474	22.2
Back side	10	QPSK 25_0	27710/2310	1:1	0.658	-0.13	20.64	21.50	1.219	0.802	22.2
Left side	10	QPSK 25_0	27710/2310	1:1	0.167	-0.14	20.64	21.50	1.219	0.204	22.2
Top side	10	QPSK 25_0	27710/2310	1:1	0.614	-0.09	20.64	21.50	1.219	0.748	22.2
Hotspot Test data (Separate 10mm 100%RB) State4											
Back side	10	QPSK 50_0	27710/2310	1:1	0.627	-0.13	20.46	21.50	1.271	0.797	22.2
Top side	10	QPSK 50_0	27710/2310	1:1	0.602	0.11	20.46	21.50	1.271	0.765	22.2
Hotspot Test data (Separate 10mm 1RB) State4 (UL CA & ENDC)											
Front side	10	QPSK 1_0	27710/2310	1:1	0.415	-0.11	20.77	19.00	0.665	0.276	22.2
Back side	10	QPSK 1_0	27710/2310	1:1	0.690	-0.03	20.77	19.00	0.665	0.459	22.2
Left side	10	QPSK 1_0	27710/2310	1:1	0.181	-0.13	20.77	19.00	0.665	0.120	22.2
Top side	10	QPSK 1_0	27710/2310	1:1	0.631	-0.14	20.77	19.00	0.665	0.420	22.2
Hotspot Test data (Separate 10mm 50%RB) State4 (UL CA & ENDC)											
Front side	10	QPSK 25_0	27710/2310	1:1	0.389	0.03	20.64	19.00	0.685	0.267	22.2
Back side	10	QPSK 25_0	27710/2310	1:1	0.658	-0.13	20.64	19.00	0.685	0.451	22.2
Left side	10	QPSK 25_0	27710/2310	1:1	0.167	-0.14	20.64	19.00	0.685	0.114	22.2
Top side	10	QPSK 25_0	27710/2310	1:1	0.614	-0.09	20.64	19.00	0.685	0.421	22.2
Hotspot Test data (Separate 10mm 100%RB) State4 (UL CA & ENDC)											
Back side	10	QPSK 50_0	27710/2310	1:1	0.627	-0.13	20.46	19.00	0.714	0.448	22.2
Top side	10	QPSK 50_0	27710/2310	1:1	0.602	0.11	20.46	19.00	0.714	0.430	22.2
Test position	BW.	Modulation	Test ch./Freq.	Duty Cycle	SAR (W/kg) 10-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled 10-g SAR(W/kg)	Liquid Temp.(°C)
Product specific 10g SAR Test data (Separate 0mm 1RB,Sensor on) State1											
Back side	10	QPSK 1_0	27710/2310	1:1	2.260	-0.12	20.77	21.50	1.183	2.674	22.2
Top side	10	QPSK 1_0	27710/2310	1:1	2.320	0.05	20.77	21.50	1.183	2.745	22.2
Product specific 10g SAR Test data (Separate 0mm 50%RB,Sensor on) State1											
Back side	10	QPSK 25_0	27710/2310	1:1	2.410	0.07	20.64	21.50	1.219	2.938	22.2
Top side	10	QPSK 25_0	27710/2310	1:1	2.440	0.10	20.64	21.50	1.219	2.974	22.2
Top side-repeated	10	QPSK 25_0	27710/2310	1:1	2.360	-0.11	20.64	21.50	1.219	2.877	22.2
Product specific 10g SAR Test data (Separate 0mm 100%RB,Sensor on) State1											
Back side	10	QPSK 50_0	27710/2310	1:1	1.780	0.10	20.46	21.50	1.271	2.262	22.2
Top side	10	QPSK 50_0	27710/2310	1:1	1.850	0.18	20.46	21.50	1.271	2.351	22.2
Product specific 10g SAR Test data (Separate 0mm 1RB,Sensor on) State1 (UL CA & ENDC)											
Back side	10	QPSK 1_0	27710/2310	1:1	2.260	-0.12	20.77	18.50	0.593	1.340	22.2
Top side	10	QPSK 1_0	27710/2310	1:1	2.320	0.05	20.77	18.50	0.593	1.376	22.2
Product specific 10g SAR Test data (Separate 0mm 50%RB,Sensor on) State1 (UL CA & ENDC)											
Back side	10	QPSK 25_0	27710/2310	1:1	2.410	0.07	20.64	18.50	0.611	1.472	22.2
Top side	10	QPSK 25_0	27710/2310	1:1	2.440	0.10	20.64	18.50	0.611	1.491	22.2
Top side-repeated	10	QPSK 25_0	27710/2310	1:1	2.360	-0.11	20.64	18.50	0.611	1.442	22.2
Product specific 10g SAR Test data (Separate 0mm 100%RB,Sensor on) State1 (UL CA & ENDC)											
Back side	10	QPSK 50_0	27710/2310	1:1	1.780	0.10	20.46	18.50	0.637	1.133	22.2
Top side	10	QPSK 50_0	27710/2310	1:1	1.850	0.18	20.46	18.50	0.637	1.178	22.2
Product specific 10g SAR Test data (Separate 0mm 1RB,Sensor off) State0											
Back side-13mm	10	QPSK 1_0	27710/2310	1:1	0.426	0.08	23.83	24.50	1.167	0.497	22.2



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032311

Rev.: 01

Page: 79 of 123

Top side-14mm	10	QPSK 1_0	27710/2310	1:1	0.471	-0.01	23.83	24.50	1.167	0.550	22.2
Ant 1 Test Record											
Test position	BW.	Test mode	Test ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1-g (W/kg)	Liquid Temp.(°C)
Head Test Data (1RB) State3											
Left cheek	10	QPSK 1_0	27710/2310	1:1	0.192	0.04	23.19	24.50	1.352	0.260	22.2
Left tilted	10	QPSK 1_0	27710/2310	1:1	0.181	-0.04	23.19	24.50	1.352	0.245	22.2
Right cheek	10	QPSK 1_0	27710/2310	1:1	0.167	0.14	23.19	24.50	1.352	0.226	22.2
Right tilted	10	QPSK 1_0	27710/2310	1:1	0.134	-0.07	23.19	24.50	1.352	0.181	22.2
Head Test Data (50%RB) State3											
Left cheek	10	QPSK 25_0	27710/2310	1:1	0.183	-0.04	22.07	23.50	1.390	0.254	22.2
Left tilted	10	QPSK 25_0	27710/2310	1:1	0.168	-0.05	22.07	23.50	1.390	0.234	22.2
Right cheek	10	QPSK 25_0	27710/2310	1:1	0.152	0.07	22.07	23.50	1.390	0.211	22.2
Right tilted	10	QPSK 25_0	27710/2310	1:1	0.120	0.02	22.07	23.50	1.390	0.167	22.2
Body worn Test data (Separate 15mm 1RB) State0											
Front side	10	QPSK 1_0	27710/2310	1:1	0.157	0.11	23.19	24.50	1.352	0.212	22.2
Back side	10	QPSK 1_0	27710/2310	1:1	0.226	-0.01	23.19	24.50	1.352	0.306	22.2
Body worn Test data (Separate 15mm 50%RB) State0											
Front side	10	QPSK 25_0	27710/2310	1:1	0.119	-0.03	22.07	23.50	1.390	0.165	22.2
Back side	10	QPSK 25_0	27710/2310	1:1	0.175	-0.16	22.07	23.50	1.390	0.243	22.2
Hotspot Test data (Separate 10mm 1RB) State4											
Front side	10	QPSK 1_0	27710/2310	1:1	0.290	-0.18	23.19	24.50	1.352	0.392	22.2
Back side	10	QPSK 1_0	27710/2310	1:1	0.486	-0.15	23.19	24.50	1.352	0.657	22.2
Left side	10	QPSK 1_0	27710/2310	1:1	0.350	-0.01	23.19	24.50	1.352	0.473	22.2
Bottom side	10	QPSK 1_0	27710/2310	1:1	0.175	0.07	23.19	24.50	1.352	0.237	22.2
Hotspot Test data (Separate 10mm 50%RB) State4											
Front side	10	QPSK 25_0	27710/2310	1:1	0.237	-0.18	22.07	23.50	1.390	0.329	22.2
Back side	10	QPSK 25_0	27710/2310	1:1	0.391	-0.07	22.07	23.50	1.390	0.543	22.2
Left side	10	QPSK 25_0	27710/2310	1:1	0.300	0.03	22.07	23.50	1.390	0.417	22.2
Bottom side	10	QPSK 25_0	27710/2310	1:1	0.138	0.15	22.07	23.50	1.390	0.192	22.2

Test Position	Test ch./Freq.	Measured SAR (W/kg)	1 st Repeated	Ratio	2 nd Repeated	3 rd Repeated
Right tilted	27710/2310	0.964	0.952	1.013	N/A	N/A
Top side 0mm	27710/2310	2.440	2.360	1.034	N/A	N/A

Note: 1) When the original highest measured SAR is ≥ 0.80 W/kg, the measurement was repeated once.

2) A second repeated measurement was performed only if the ratio of largest to smallest SAR for the original and first repeated measurements was > 1.20 or when the original or repeated measurement was ≥ 1.45 W/kg ($\sim 10\%$ from the 1-g SAR limit).

3) A third repeated measurement was performed only if the original, first or second repeated measurement was ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

4) Repeated measurements are not required when the original highest measured SAR is < 0.80 W/kg

5) The same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds. The repeated measurement results must be clearly identified in the SAR report.

Ant 3 Test Record											
Test position	BW	Test mode	Test ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scale d factor	Scaled SAR 1-g (W/kg)	Liquid Temp.(℃)
Head Test Data (1RB) State3											
Left cheek	20	QPSK 1_0	132322/1745	1:1	0.440	0.11	18.71	20.00	1.346	0.592	22.4
Left tilted	20	QPSK 1_0	132322/1745	1:1	0.520	0.03	18.71	20.00	1.346	0.700	22.4
Right cheek	20	QPSK 1_0	132322/1745	1:1	0.829	0.06	18.71	20.00	1.346	1.116	22.4
Right cheek	20	QPSK 1_0	132072/1720	1:1	0.812	0.01	18.64	20.00	1.368	1.111	22.4
Right cheek	20	QPSK 1_0	132572/1770	1:1	0.803	-0.02	18.59	20.00	1.384	1.111	22.4
Right tilted	20	QPSK 1_0	132322/1745	1:1	0.836	-0.02	18.71	20.00	1.346	1.125	22.4
Right tilted-UL CA_66B	15	QPSK 1_0	132322/1745	1:1	0.821	-0.07	18.67	20.00	1.358	1.115	22.4
	5	QPSK 1_99	132124/1725.2								
Right tilted-UL CA_66C	20	QPSK 1_0	132322/1745	1:1	0.829	0.03	18.69	20.00	1.352	1.121	22.4
	20	QPSK 1_99	132124/1725.2								
Right tilted	20	QPSK 1_0	132072/1720	1:1	0.813	0.15	18.64	20.00	1.368	1.112	22.4
Right tilted	20	QPSK 1_0	132572/1770	1:1	0.806	0.02	18.59	20.00	1.384	1.115	22.4
Head Test Data (50%RB) State3											
Left cheek	20	QPSK 50_0	132322/1745	1:1	0.391	-0.16	18.54	20.00	1.400	0.547	22.4
Left tilted	20	QPSK 50_0	132322/1745	1:1	0.439	-0.13	18.54	20.00	1.400	0.614	22.4
Right cheek	20	QPSK 50_0	132322/1745	1:1	0.750	0.04	18.54	20.00	1.400	1.050	22.4
Right cheek	20	QPSK 50_0	132072/1720	1:1	0.728	-0.11	18.51	20.00	1.409	1.026	22.4
Right cheek	20	QPSK 50_0	132572/1770	1:1	0.739	-0.02	18.53	20.00	1.403	1.037	22.4
Right tilted	20	QPSK 50_0	132322/1745	1:1	0.762	-0.04	18.54	20.00	1.400	1.066	22.4
Right tilted	20	QPSK 50_0	132072/1720	1:1	0.723	0.05	18.51	20.00	1.409	1.019	22.4
Right tilted	20	QPSK 50_0	132572/1770	1:1	0.742	0.02	18.53	20.00	1.403	1.041	22.4
Head Test Data (100%RB) State3											
Right cheek	20	QPSK 100_0	132322/1745	1:1	0.723	0.04	18.38	20.00	1.452	1.050	22.4
Right tilted	20	QPSK 100_0	132322/1745	1:1	0.750	0.07	18.38	20.00	1.452	1.089	22.4
Head Test Data (1RB) State3 (UL CA & ENDC)											
Left cheek	20	QPSK 1_0	132322/1745	1:1	0.440	0.11	18.71	17.00	0.675	0.297	22.4
Left tilted	20	QPSK 1_0	132322/1745	1:1	0.520	0.03	18.71	17.00	0.675	0.351	22.4
Right cheek	20	QPSK 1_0	132322/1745	1:1	0.829	0.06	18.71	17.00	0.675	0.559	22.4
Right cheek	20	QPSK 1_0	132072/1720	1:1	0.812	0.01	18.64	17.00	0.685	0.557	22.4
Right cheek	20	QPSK 1_0	132572/1770	1:1	0.803	-0.02	18.59	17.00	0.693	0.557	22.4
Right tilted	20	QPSK 1_0	132322/1745	1:1	0.836	-0.02	18.71	17.00	0.675	0.564	22.4
Right tilted	20	QPSK 1_0	132072/1720	1:1	0.813	0.15	18.64	17.00	0.685	0.557	22.4
Right tilted	20	QPSK 1_0	132572/1770	1:1	0.806	0.02	18.59	17.00	0.693	0.559	22.4
Head Test Data (50%RB) State3 (UL CA & ENDC)											
Left cheek	20	QPSK 50_0	132322/1745	1:1	0.391	-0.16	18.54	17.00	0.701	0.274	22.4
Left tilted	20	QPSK 50_0	132322/1745	1:1	0.439	-0.13	18.54	17.00	0.701	0.308	22.4
Right cheek	20	QPSK 50_0	132322/1745	1:1	0.750	0.04	18.54	17.00	0.701	0.526	22.4
Right cheek	20	QPSK 50_0	132072/1720	1:1	0.728	-0.11	18.51	17.00	0.706	0.514	22.4
Right cheek	20	QPSK 50_0	132572/1770	1:1	0.739	-0.02	18.53	17.00	0.703	0.520	22.4
Right tilted	20	QPSK 50_0	132322/1745	1:1	0.762	-0.04	18.54	17.00	0.701	0.535	22.4
Right tilted	20	QPSK 50_0	132072/1720	1:1	0.723	0.05	18.51	17.00	0.706	0.511	22.4
Right tilted	20	QPSK 50_0	132572/1770	1:1	0.742	0.02	18.53	17.00	0.703	0.522	22.4
Head Test Data (100%RB) State3 (UL CA & ENDC)											



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032311

Rev.: 01

Page: 81 of 123

Right cheek	20	QPSK 100_0	132322/1745	1:1	0.723	0.04	18.38	17.00	0.728	0.526	22.4
Right tilted	20	QPSK 100_0	132322/1745	1:1	0.750	0.07	18.38	17.00	0.728	0.546	22.4
Body worn Test data (Separate 15mm 1RB) State0											
Front side	20	QPSK 1_0	132322/1745	1:1	0.362	-0.01	23.79	25.00	1.321	0.478	22.4
Back side	20	QPSK 1_0	132322/1745	1:1	0.543	-0.15	23.79	25.00	1.321	0.717	22.4
Back side-UL CA_66B	15	QPSK 1_0	132322/1745	1:1	0.536	-0.04	18.67	25.00	1.340	0.718	22.4
	5	QPSK 1_99	132124/1725.2								
Back side-UL CA_66C	20	QPSK 1_0	132322/1745	1:1	0.532	0.09	18.69	25.00	1.337	0.711	22.4
	20	QPSK 1_99	132124/1725.2								
Body worn Test data (Separate 15mm 50%RB) State0											
Front side	20	QPSK 50_0	132322/1745	1:1	0.284	-0.07	22.58	24.00	1.387	0.394	22.4
Back side	20	QPSK 50_0	132322/1745	1:1	0.429	-0.05	22.58	24.00	1.387	0.595	22.4
Hotspot Test data (Separate 10mm 1RB) State4											
Front side	20	QPSK 1_0	132322/1745	1:1	0.509	0.13	23.79	25.00	1.321	0.673	22.4
Back side	20	QPSK 1_0	132322/1745	1:1	0.901	-0.01	23.79	25.00	1.321	1.190	22.4
Back side-repeated	20	QPSK 1_0	132322/1745	1:1	0.897	0.03	23.79	25.00	1.321	1.185	22.4
Back side-UL CA_66B	15	QPSK 1_0	132322/1745	1:1	0.881	0.02	18.67	25.00	1.340	1.180	22.4
	5	QPSK 1_99	132124/1725.2								
Back side-UL CA_66C	20	QPSK 1_0	132322/1745	1:1	0.884	0.06	18.69	25.00	1.337	1.182	22.4
	20	QPSK 1_99	132124/1725.2								
Back side	20	QPSK 1_0	132072/1720	1:1	0.856	0.17	23.70	25.00	1.349	1.155	22.4
Back side	20	QPSK 1_0	132572/1770	1:1	0.863	0.18	23.65	25.00	1.365	1.178	22.4
Left side	20	QPSK 1_0	132322/1745	1:1	0.235	-0.17	23.79	25.00	1.321	0.311	22.4
Top side	20	QPSK 1_0	132322/1745	1:1	0.679	0.09	23.79	25.00	1.321	0.897	22.4
Top side	20	QPSK 1_0	132072/1720	1:1	0.650	0.16	23.70	25.00	1.349	0.877	22.4
Top side	20	QPSK 1_0	132572/1770	1:1	0.678	0.08	23.65	25.00	1.365	0.925	22.4
Hotspot Test data (Separate 10mm 50%RB) State4											
Front side	20	QPSK 50_0	132322/1745	1:1	0.410	-0.04	22.58	24.00	1.387	0.569	22.4
Back side	20	QPSK 50_0	132322/1745	1:1	0.694	0.11	22.58	24.00	1.387	0.962	22.4
Back side	20	QPSK 50_0	132072/1720	1:1	0.658	0.01	22.54	24.00	1.400	0.921	22.4
Back side	20	QPSK 50_0	132572/1770	1:1	0.675	-0.06	22.55	24.00	1.396	0.943	22.4
Left side	20	QPSK 50_0	132322/1745	1:1	0.178	-0.01	22.58	24.00	1.387	0.247	22.4
Top side	20	QPSK 50_0	132322/1745	1:1	0.545	-0.16	22.58	24.00	1.387	0.756	22.4
Top side	20	QPSK 50_0	132072/1720	1:1	0.469	-0.06	22.54	24.00	1.400	0.656	22.4
Top side	20	QPSK 50_0	132572/1770	1:1	0.519	-0.14	22.55	24.00	1.396	0.725	22.4
Hotspot Test data (Separate 10mm 100%RB) State4											
Back side	20	QPSK 100_0	132322/1745	1:1	0.678	-0.18	22.42	24.00	1.439	0.976	22.4
Top side	20	QPSK 100_0	132322/1745	1:1	0.513	-0.12	22.42	24.00	1.439	0.738	22.4
Hotspot Test data (Separate 10mm 1RB) State4 (UL CA & ENDC)											
Front side	20	QPSK 1_0	132322/1745	1:1	0.509	0.13	23.79	21.50	0.590	0.300	22.4
Back side	20	QPSK 1_0	132322/1745	1:1	0.901	-0.01	23.79	21.50	0.590	0.532	22.4
Back side-repeated	20	QPSK 1_0	132322/1745	1:1	0.897	0.03	23.79	21.50	0.590	0.529	22.4
Back side	20	QPSK 1_0	132072/1720	1:1	0.856	0.17	23.70	21.50	0.603	0.516	22.4
Back side	20	QPSK 1_0	132572/1770	1:1	0.863	0.18	23.65	21.50	0.610	0.526	22.4
Left side	20	QPSK 1_0	132322/1745	1:1	0.235	-0.17	23.79	21.50	0.590	0.139	22.4
Top side	20	QPSK 1_0	132322/1745	1:1	0.679	0.09	23.79	21.50	0.590	0.401	22.4
Top side	20	QPSK 1_0	132072/1720	1:1	0.650	0.16	23.70	21.50	0.603	0.392	22.4
Top side	20	QPSK 1_0	132572/1770	1:1	0.678	0.08	23.65	21.50	0.610	0.413	22.4



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032311

Rev.: 01

Page: 82 of 123

Hotspot Test data (Separate 10mm 50%RB) State4 (UL CA & ENDC)											
Front side	20	QPSK 50_0	132322/1745	1:1	0.410	-0.04	22.58	21.50	0.780	0.320	22.4
Back side	20	QPSK 50_0	132322/1745	1:1	0.694	0.11	22.58	21.50	0.780	0.541	22.4
Back side	20	QPSK 50_0	132072/1720	1:1	0.658	0.01	22.54	21.50	0.787	0.518	22.4
Back side	20	QPSK 50_0	132572/1770	1:1	0.675	-0.06	22.55	21.50	0.785	0.530	22.4
Left side	20	QPSK 50_0	132322/1745	1:1	0.178	-0.01	22.58	21.50	0.780	0.139	22.4
Top side	20	QPSK 50_0	132322/1745	1:1	0.545	-0.16	22.58	21.50	0.780	0.425	22.4
Top side	20	QPSK 50_0	132072/1720	1:1	0.469	-0.06	22.54	21.50	0.787	0.369	22.4
Top side	20	QPSK 50_0	132572/1770	1:1	0.519	-0.14	22.55	21.50	0.785	0.408	22.4
Hotspot Test data (Separate 10mm 100%RB) State4 (UL CA & ENDC)											
Back side	20	QPSK 100_0	132322/1745	1:1	0.678	-0.18	22.42	21.50	0.809	0.549	22.4
Top side	20	QPSK 100_0	132322/1745	1:1	0.513	-0.12	22.42	21.50	0.809	0.415	22.4
Ant 1 Test Record											
Test position	BW	Test mode	Test ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scale d factor	Scaled SAR 1-g (W/kg)	Liquid Temp.(°C)
Head Test Data (1RB) State3											
Left cheek	20	QPSK 1_0	132322/1745	1:1	0.244	-0.09	23.73	25.00	1.340	0.327	22.4
Left tilted	20	QPSK 1_0	132322/1745	1:1	0.154	-0.12	23.73	25.00	1.340	0.206	22.4
Right cheek	20	QPSK 1_0	132322/1745	1:1	0.186	0.06	23.73	25.00	1.340	0.249	22.4
Right tilted	20	QPSK 1_0	132322/1745	1:1	0.139	-0.19	23.73	25.00	1.340	0.186	22.4
Head Test Data (50%RB) State3											
Left cheek	20	QPSK 50_0	132322/1745	1:1	0.223	-0.01	22.55	24.00	1.396	0.311	22.4
Left tilted	20	QPSK 50_0	132322/1745	1:1	0.138	-0.16	22.55	24.00	1.396	0.193	22.4
Right cheek	20	QPSK 50_0	132322/1745	1:1	0.164	0.06	22.55	24.00	1.396	0.229	22.4
Right tilted	20	QPSK 50_0	132322/1745	1:1	0.122	-0.04	22.55	24.00	1.396	0.170	22.4
Body worn Test data (Separate 15mm 1RB) State0											
Front side	20	QPSK 1_0	132322/1745	1:1	0.303	0.01	23.73	25.00	1.340	0.406	22.4
Back side	20	QPSK 1_0	132322/1745	1:1	0.449	-0.12	23.73	25.00	1.340	0.602	22.4
Body worn Test data (Separate 15mm 50%RB) State0											
Front side	20	QPSK 50_0	132322/1745	1:1	0.236	-0.10	22.55	24.00	1.396	0.330	22.4
Back side	20	QPSK 50_0	132322/1745	1:1	0.332	-0.03	22.55	24.00	1.396	0.464	22.4
Hotspot Test data (Separate 10mm 1RB) State4											
Front side	20	QPSK 1_0	132322/1745	1:1	0.354	-0.17	23.73	25.00	1.340	0.474	22.4
Back side	20	QPSK 1_0	132322/1745	1:1	0.549	-0.04	23.73	25.00	1.340	0.735	22.4
Left side	20	QPSK 1_0	132322/1745	1:1	0.413	-0.08	23.73	25.00	1.340	0.553	22.4
Bottom side	20	QPSK 1_0	132322/1745	1:1	0.434	0.02	23.73	25.00	1.340	0.581	22.4
Hotspot Test data (Separate 10mm 50%RB) State4											
Front side	20	QPSK 50_0	132322/1745	1:1	0.286	0.15	22.55	24.00	1.396	0.399	22.4
Back side	20	QPSK 50_0	132322/1745	1:1	0.437	-0.13	22.55	24.00	1.396	0.610	22.4
Left side	20	QPSK 50_0	132322/1745	1:1	0.356	0.10	22.55	24.00	1.396	0.497	22.4
Bottom side	20	QPSK 50_0	132322/1745	1:1	0.325	0.02	22.55	24.00	1.396	0.454	22.4
Hotspot Test data (Separate 10mm 1RB) State4 (ENDC)											
Front side	20	QPSK 1_0	132322/1745	1:1	0.354	-0.17	23.73	23.00	0.845	0.299	22.4
Back side	20	QPSK 1_0	132322/1745	1:1	0.549	-0.04	23.73	23.00	0.845	0.464	22.4
Left side	20	QPSK 1_0	132322/1745	1:1	0.413	-0.08	23.73	23.00	0.845	0.349	22.4
Bottom side	20	QPSK 1_0	132322/1745	1:1	0.434	0.02	23.73	23.00	0.845	0.367	22.4
Hotspot Test data (Separate 10mm 50%RB) State4 (ENDC)											
Front side	20	QPSK 50_0	132322/1745	1:1	0.286	0.15	22.55	23.00	1.109	0.317	22.4



Report No.: SUCR250400032311

Rev.: 01

Page: 83 of 123

Test Position	Test ch./Freq.	Measured SAR (W/kg)	1 st Repeated	Ratio	2 nd Repeated	3 rd Repeated
Back side	132322/1745	0.901	0.897	1.004	N/A	N/A

Note: 1) When the original highest measured SAR is ≥ 0.80 W/kg, the measurement was repeated once.

2) A second repeated measurement was performed only if the ratio of largest to smallest SAR for the original and first repeated measurements was > 1.20 or when the original or repeated measurement was ≥ 1.45 W/kg ($\sim 10\%$ from the 1-g SAR limit).

3) A third repeated measurement was performed only if the original, first or second repeated measurement was ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

4) Repeated measurements are not required when the original highest measured SAR is $< 0.80 \text{ W/kg}$

5) The same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds. The repeated measurement results must be clearly identified in the SAR report.

Ant3 Test Record											
Test position	BW.	Modulation	Test ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1-g (W/kg)	Liquid Temp.(°C)
Head Test Data (1RB) State3											
Left cheek	20	QPSK 1_1	376000/1880	100%	0.409	-0.04	18.44	19.50	1.276	0.522	22.1
Left tilted	20	QPSK 1_1	376000/1880	100%	0.481	0.01	18.44	19.50	1.276	0.614	22.1
Right cheek	20	QPSK 1_1	376000/1880	100%	0.804	0.13	18.44	19.50	1.276	1.026	22.1
Right cheek	20	QPSK 1_1	372000/1860	100%	0.759	0.13	18.36	19.50	1.300	0.987	22.1
Right cheek	20	QPSK 1_1	380000/1900	100%	0.755	0.13	18.31	19.50	1.315	0.993	22.1
Right tilted	20	QPSK 1_1	376000/1880	100%	0.860	0.05	18.44	19.50	1.276	1.098	22.1
Right tilted	20	QPSK 1_1	372000/1860	100%	0.793	0.05	18.36	19.50	1.300	1.031	22.1
Right tilted	20	QPSK 1_1	380000/1900	100%	0.770	-0.14	18.31	19.50	1.315	1.013	22.1
Head Test Data (50%RB) State3											
Left cheek	20	QPSK 50_28	376000/1880	100%	0.455	-0.08	18.34	19.50	1.306	0.594	22.1
Left tilted	20	QPSK 50_28	376000/1880	100%	0.533	-0.03	18.34	19.50	1.306	0.696	22.1
Right cheek	20	QPSK 50_28	376000/1880	100%	0.871	0.15	18.34	19.50	1.306	1.138	22.1
Right cheek	20	QPSK 50_28	372000/1860	100%	0.804	0.13	18.29	19.50	1.321	1.062	22.1
Right cheek	20	QPSK 50_28	380000/1900	100%	0.853	-0.07	18.25	19.50	1.334	1.137	22.1
Right tilted	20	QPSK 50_28	376000/1880	100%	0.894	-0.08	18.34	19.50	1.306	1.168	22.1
Right tilted-repeated	20	QPSK 50_28	376000/1880	100%	0.889	0.02	18.34	19.50	1.306	1.161	22.1
Right tilted	20	QPSK 50_28	372000/1860	100%	0.856	0.03	18.29	19.50	1.321	1.131	22.1
Right tilted	20	QPSK 50_28	380000/1900	100%	0.868	0.18	18.25	19.50	1.334	1.157	22.1
Head Test Data (100%RB) State3											
Right cheek	20	QPSK 100_0	376000/1880	100%	0.795	-0.19	18.23	19.50	1.340	1.065	22.1
Right tilted	20	QPSK 100_0	376000/1880	100%	0.804	0.02	18.23	19.50	1.340	1.077	22.1
Head Test Data (1RB) State3 (ENDC)											
Left cheek	20	QPSK 1_1	376000/1880	100%	0.409	-0.04	18.44	16.50	0.640	0.262	22.1
Left tilted	20	QPSK 1_1	376000/1880	100%	0.481	0.01	18.44	16.50	0.640	0.308	22.1
Right cheek	20	QPSK 1_1	376000/1880	100%	0.804	0.13	18.44	16.50	0.640	0.514	22.1
Right cheek	20	QPSK 1_1	372000/1860	100%	0.759	0.13	18.36	16.50	0.652	0.495	22.1
Right cheek	20	QPSK 1_1	380000/1900	100%	0.755	0.13	18.31	16.50	0.659	0.498	22.1
Right tilted	20	QPSK 1_1	376000/1880	100%	0.860	0.05	18.44	16.50	0.640	0.550	22.1
Right tilted	20	QPSK 1_1	372000/1860	100%	0.793	0.05	18.36	16.50	0.652	0.517	22.1
Right tilted	20	QPSK 1_1	380000/1900	100%	0.770	-0.14	18.31	16.50	0.659	0.508	22.1
Head Test Data (50%RB) State3											
Left cheek	20	QPSK 50_28	376000/1880	100%	0.455	-0.08	18.34	16.50	0.655	0.298	22.1
Left tilted	20	QPSK 50_28	376000/1880	100%	0.533	-0.03	18.34	16.50	0.655	0.349	22.1
Right cheek	20	QPSK 50_28	376000/1880	100%	0.871	0.15	18.34	16.50	0.655	0.570	22.1
Right cheek	20	QPSK 50_28	372000/1860	100%	0.804	0.13	18.29	16.50	0.662	0.532	22.1
Right cheek	20	QPSK 50_28	380000/1900	100%	0.853	-0.07	18.25	16.50	0.668	0.570	22.1
Right tilted	20	QPSK 50_28	376000/1880	100%	0.894	-0.08	18.34	16.50	0.655	0.585	22.1
Right tilted-repeated	20	QPSK 50_28	376000/1880	100%	0.889	0.02	18.34	16.50	0.655	0.582	22.1
Right tilted	20	QPSK 50_28	372000/1860	100%	0.856	0.03	18.29	16.50	0.662	0.567	22.1
Right tilted	20	QPSK 50_28	380000/1900	100%	0.868	0.18	18.25	16.50	0.668	0.580	22.1
Head Test Data (100%RB) State3											
Right cheek	20	QPSK 100_0	376000/1880	100%	0.795	-0.19	18.23	16.50	0.671	0.534	22.1
Right tilted	20	QPSK 100_0	376000/1880	100%	0.804	0.02	18.23	16.50	0.671	0.540	22.1
Body worn Test data (Separate 15mm 1RB) State0											



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032311

Rev.: 01

Page: 85 of 123

Front side	20	QPSK 1_1	376000/1880	100%	0.315	0.10	23.89	25.00	1.291	0.407	22.1
Back side	20	QPSK 1_1	376000/1880	100%	0.463	-0.02	23.89	25.00	1.291	0.598	22.1
Body worn Test data (Separate 15mm 50%RB) State0											
Front side	20	QPSK 50_28	376000/1880	100%	0.341	0.06	23.82	25.00	1.312	0.447	22.1
Back side	20	QPSK 50_28	376000/1880	100%	0.524	-0.04	23.82	25.00	1.312	0.688	22.1
Hotspot Test data (Separate 10mm 1RB) State4											
Front side	20	QPSK 1_1	376000/1880	100%	0.366	0.05	22.35	23.50	1.303	0.477	22.1
Back side	20	QPSK 1_1	376000/1880	100%	0.583	-0.17	22.35	23.50	1.303	0.760	22.1
Left side	20	QPSK 1_1	376000/1880	100%	0.099	-0.17	22.35	23.50	1.303	0.129	22.1
Top side	20	QPSK 1_1	376000/1880	100%	0.628	-0.15	22.35	23.50	1.303	0.818	22.1
Top side	20	QPSK 1_1	372000/1860	100%	0.600	0.01	22.28	23.50	1.324	0.795	22.1
Top side	20	QPSK 1_1	380000/1900	100%	0.566	-0.04	22.32	23.50	1.312	0.743	22.1
Hotspot Test data (Separate 10mm 50%RB) State4											
Front side	20	QPSK 50_28	376000/1880	100%	0.370	-0.06	22.29	23.50	1.321	0.489	22.1
Back side	20	QPSK 50_28	376000/1880	100%	0.605	0.00	22.29	23.50	1.321	0.799	22.1
Back side	20	QPSK 50_28	372000/1860	100%	0.572	0.10	22.29	23.50	1.321	0.756	22.1
Back side	20	QPSK 50_28	380000/1900	100%	0.589	-0.03	22.29	23.50	1.321	0.778	22.1
Left side	20	QPSK 50_28	376000/1880	100%	0.102	-0.03	22.29	23.50	1.321	0.135	22.1
Top side	20	QPSK 50_28	376000/1880	100%	0.672	-0.02	22.29	23.50	1.321	0.888	22.1
Top side	20	QPSK 50_28	372000/1860	100%	0.605	-0.17	22.24	23.50	1.337	0.809	22.1
Top side	20	QPSK 50_28	380000/1900	100%	0.616	-0.19	22.23	23.50	1.340	0.825	22.1
Hotspot Test data (Separate 10mm 100%RB) State4											
Top side	20	QPSK 100_0	376000/1880	100%	0.654	-0.11	22.21	23.50	1.346	0.880	22.1
Hotspot Test data (Separate 10mm 1RB) State4 (ENDC)											
Front side	20	QPSK 1_1	376000/1880	100%	0.366	0.05	22.35	21.00	0.733	0.268	22.1
Back side	20	QPSK 1_1	376000/1880	100%	0.583	-0.17	22.35	21.00	0.733	0.427	22.1
Left side	20	QPSK 1_1	376000/1880	100%	0.099	-0.17	22.35	21.00	0.733	0.073	22.1
Top side	20	QPSK 1_1	376000/1880	100%	0.628	-0.15	22.35	21.00	0.733	0.460	22.1
Top side	20	QPSK 1_1	372000/1860	100%	0.600	0.01	22.28	21.00	0.745	0.447	22.1
Top side	20	QPSK 1_1	380000/1900	100%	0.566	-0.04	22.32	21.00	0.738	0.418	22.1
Hotspot Test data (Separate 10mm 50%RB) State4 (ENDC)											
Front side	20	QPSK 50_28	376000/1880	100%	0.370	-0.06	22.29	21.00	0.743	0.275	22.1
Back side	20	QPSK 50_28	376000/1880	100%	0.605	0.00	22.29	21.00	0.743	0.450	22.1
Back side	20	QPSK 50_28	372000/1860	100%	0.572	0.10	22.29	21.00	0.743	0.425	22.1
Back side	20	QPSK 50_28	380000/1900	100%	0.589	-0.03	22.29	21.00	0.743	0.438	22.1
Left side	20	QPSK 50_28	376000/1880	100%	0.102	-0.03	22.29	21.00	0.743	0.076	22.1
Top side	20	QPSK 50_28	376000/1880	100%	0.672	-0.02	22.29	21.00	0.743	0.499	22.1
Top side	20	QPSK 50_28	372000/1860	100%	0.605	-0.17	22.24	21.00	0.752	0.455	22.1
Top side	20	QPSK 50_28	380000/1900	100%	0.616	-0.19	22.23	21.00	0.753	0.464	22.1
Hotspot Test data (Separate 10mm 100%RB) State4 (ENDC)											
Top side	20	QPSK 100_0	376000/1880	100%	0.654	-0.11	22.21	21.00	0.757	0.495	22.1
Test position	BW.	Modulation	Test ch./Freq.	Duty Cycle	SAR (W/kg) 10-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled 10-g SAR(W/kg)	Liquid Temp.(°C)
Product specific 10g SAR Test data (Separate 0mm 1RB,Sensor on) State1											
Top side	20	QPSK 1_1	376000/1880	100%	2.210	0.03	22.35	23.50	1.303	2.880	22.1
Top side	20	QPSK 1_1	372000/1860	100%	1.970	-0.13	22.28	23.50	1.324	2.609	22.1
Top side	20	QPSK 1_1	380000/1900	100%	2.070	-0.14	22.32	23.50	1.312	2.716	22.1
Product specific 10g SAR Test data (Separate 0mm 50%RB,Sensor on) State1											
Top side	20	QPSK 50_28	376000/1880	100%	2.270	-0.02	22.29	23.50	1.321	2.999	22.1



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032311

Rev.: 01

Page: 86 of 123

Top side-repeated	20	QPSK 50_28	376000/1880	100%	2.210	0.09	22.29	23.50	1.321	2.920	22.1
Top side	20	QPSK 50_28	372000/1860	100%	2.000	-0.07	22.24	23.50	1.337	2.673	22.1
Top side	20	QPSK 50_28	380000/1900	100%	2.160	0.02	22.23	23.50	1.340	2.894	22.1
Product specific 10g SAR Test data (Separate 0mm 100%RB,Sensor on) State1											
Top side	20	QPSK 100_0	376000/1880	100%	1.730	-0.15	22.21	23.50	1.346	2.328	22.1
Product specific 10g SAR Test data (Separate 0mm 1RB,Sensor on) State1 (ENDC)											
Top side	20	QPSK 1_1	376000/1880	100%	2.210	0.03	22.35	20.50	0.653	1.443	22.1
Top side	20	QPSK 1_1	372000/1860	100%	1.970	-0.13	22.28	20.50	0.664	1.308	22.1
Top side	20	QPSK 1_1	380000/1900	100%	2.070	-0.14	22.32	20.50	0.658	1.361	22.1
Product specific 10g SAR Test data (Separate 0mm 50%RB,Sensor on) State1 (ENDC)											
Top side	20	QPSK 50_28	376000/1880	100%	2.270	-0.02	22.29	20.50	0.662	1.503	22.1
Top side-repeated	20	QPSK 50_28	376000/1880	100%	2.210	0.09	22.29	20.50	0.662	1.463	22.1
Top side	20	QPSK 50_28	372000/1860	100%	2.000	-0.07	22.24	20.50	0.670	1.340	22.1
Top side	20	QPSK 50_28	380000/1900	100%	2.160	0.02	22.23	20.50	0.671	1.450	22.1
Product specific 10g SAR Test data (Separate 0mm 100%RB,Sensor on) State1 (ENDC)											
Top side	20	QPSK 100_0	376000/1880	100%	1.730	-0.15	22.21	20.50	0.675	1.167	22.1
Product specific 10g SAR Test data (Separate 0mm 1RB,Sensor off) State0											
Top side-14mm	20	QPSK 1_1	376000/1880	100%	0.326	0.04	23.89	25.00	1.291	0.421	22.1
Ant1 Test Record											
Test position	BW.	Modulation	Test ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1-g (W/kg)	Liquid Temp.(°C)
Head Test Data (1RB) State3											
Left cheek	20	QPSK 1_1	376000/1880	100%	0.239	0.10	23.60	25.00	1.380	0.330	22.1
Left tilted	20	QPSK 1_1	376000/1880	100%	0.172	0.09	23.60	25.00	1.380	0.237	22.1
Right cheek	20	QPSK 1_1	376000/1880	100%	0.195	0.01	23.60	25.00	1.380	0.269	22.1
Right tilted	20	QPSK 1_1	376000/1880	100%	0.147	-0.04	23.60	25.00	1.380	0.203	22.1
Head Test Data (50%RB) State3											
Left cheek	20	QPSK 50_0	376000/1880	100%	0.252	-0.02	23.58	25.00	1.387	0.349	22.1
Left tilted	20	QPSK 50_0	376000/1880	100%	0.183	0.00	23.58	25.00	1.387	0.254	22.1
Right cheek	20	QPSK 50_0	376000/1880	100%	0.206	0.16	23.58	25.00	1.387	0.286	22.1
Right tilted	20	QPSK 50_0	376000/1880	100%	0.159	-0.06	23.58	25.00	1.387	0.220	22.1
Body worn Test data (Separate 15mm 1RB) State0											
Front side	20	QPSK 1_1	376000/1880	100%	0.242	0.05	23.60	25.00	1.380	0.334	22.1
Back side	20	QPSK 1_1	376000/1880	100%	0.324	-0.16	23.60	25.00	1.380	0.447	22.1
Body worn Test data (Separate 15mm 50%RB) State0											
Front side	20	QPSK 50_0	376000/1880	100%	0.294	-0.05	23.58	25.00	1.387	0.408	22.1
Back side	20	QPSK 50_0	376000/1880	100%	0.398	-0.16	23.58	25.00	1.387	0.552	22.1
Hotspot Test data (Separate 10mm 1RB) State4											
Front side	20	QPSK 1_1	376000/1880	100%	0.425	-0.12	23.60	25.00	1.380	0.587	22.1
Back side	20	QPSK 1_1	376000/1880	100%	0.723	0.15	23.60	25.00	1.380	0.998	22.1
Back side	20	QPSK 1_1	372000/1860	100%	0.715	0.07	23.60	25.00	1.380	0.987	22.1
Back side	20	QPSK 1_1	380000/1900	100%	0.705	-0.05	23.60	25.00	1.380	0.973	22.1
Left side	20	QPSK 1_1	376000/1880	100%	0.544	0.16	23.60	25.00	1.380	0.751	22.1
Bottom side	20	QPSK 1_1	376000/1880	100%	0.422	0.08	23.60	25.00	1.380	0.583	22.1
Hotspot Test data (Separate 10mm 50%RB) State4											
Front side	20	QPSK 50_28	376000/1880	100%	0.513	0.17	23.58	25.00	1.387	0.711	22.1
Back side	20	QPSK 50_28	376000/1880	100%	0.781	0.10	23.58	25.00	1.387	1.083	22.1
Back side	20	QPSK 50_28	372000/1860	100%	0.748	0.11	23.58	25.00	1.387	1.037	22.1
Back side	20	QPSK 50_28	380000/1900	100%	0.755	-0.10	23.58	25.00	1.387	1.047	22.1



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032311

Rev.: 01

Page: 87 of 123

Left side	20	QPSK 50_28	376000/1880	100%	0.552	-0.11	23.58	25.00	1.387	0.765	22.1
Bottom side	20	QPSK 50_28	376000/1880	100%	0.498	-0.07	23.58	25.00	1.387	0.691	22.1
Hotspot Test data (Separate 10mm 100%RB) State4											
Back side	20	QPSK 100_0	376000/1880	100%	0.655	0.01	22.47	24.00	1.422	0.932	22.1

Test Position	Test ch./Freq.	Measured SAR (W/kg)	1 st Repeated	Ratio	2 nd Repeated	3 rd Repeated
Right tilted	376000/1880	0.894	0.889	1.006	N/A	N/A
Top side 0mm	376000/1880	2.270	2.210	1.027	N/A	N/A

Note: 1) When the original highest measured SAR is ≥ 0.80 W/kg, the measurement was repeated once.

2) A second repeated measurement was performed only if the ratio of largest to smallest SAR for the original and first repeated measurements was > 1.20 or when the original or repeated measurement was ≥ 1.45 W/kg ($\sim 10\%$ from the 1-g SAR limit).

3) A third repeated measurement was performed only if the original, first or second repeated measurement was ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

4) Repeated measurements are not required when the original highest measured SAR is < 0.80 W/kg

5) The same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds. The repeated measurement results must be clearly identified in the SAR report.



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032311

Rev.: 01

Page: 88 of 123

8.2.12 SAR Result of 5G NR n5

Ant0 Test Record											
Test position	BW.	Modulation	Test ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1-g (W/kg)	Liquid Temp.(°C)
Head Test Data (1RB) State3											
Left cheek	20	QPSK 1_1	167300/836.5	100%	0.262	0.18	24.36	25.00	1.159	0.304	22.2
Left tilted	20	QPSK 1_1	167300/836.5	100%	0.153	-0.10	24.36	25.00	1.159	0.177	22.2
Right cheek	20	QPSK 1_1	167300/836.5	100%	0.298	-0.02	24.36	25.00	1.159	0.345	22.2
Right tilted	20	QPSK 1_1	167300/836.5	100%	0.185	-0.02	24.36	25.00	1.159	0.214	22.2
Head Test Data (50%RB) State3											
Left cheek	20	QPSK 50_28	167300/836.5	100%	0.275	0.17	24.28	25.00	1.180	0.325	22.2
Left tilted	20	QPSK 50_28	167300/836.5	100%	0.159	-0.16	24.28	25.00	1.180	0.188	22.2
Right cheek	20	QPSK 50_28	167300/836.5	100%	0.313	0.07	24.28	25.00	1.180	0.369	22.2
Right tilted	20	QPSK 50_28	167300/836.5	100%	0.204	0.19	24.28	25.00	1.180	0.241	22.2
Body worn Test data (Separate 15mm 1RB) State0											
Front side	20	QPSK 1_1	167300/836.5	100%	0.303	0.15	24.36	25.00	1.159	0.351	22.2
Back side	20	QPSK 1_1	167300/836.5	100%	0.358	-0.07	24.36	25.00	1.159	0.415	22.2
Body worn Test data (Separate 15mm 50%RB) State0											
Front side	20	QPSK 50_28	167300/836.5	100%	0.315	0.15	24.28	25.00	1.180	0.372	22.2
Back side	20	QPSK 50_28	167300/836.5	100%	0.368	-0.04	24.28	25.00	1.180	0.434	22.2
Hotspot Test data (Separate 10mm 1RB) State4											
Front side	20	QPSK 1_1	167300/836.5	100%	0.301	-0.08	24.36	25.00	1.159	0.349	22.2
Back side	20	QPSK 1_1	167300/836.5	100%	0.349	0.00	24.36	25.00	1.159	0.404	22.2
Left side	20	QPSK 1_1	167300/836.5	100%	0.154	-0.19	24.36	25.00	1.159	0.178	22.2
Right side	20	QPSK 1_1	167300/836.5	100%	0.262	0.18	24.36	25.00	1.159	0.304	22.2
Bottom side	20	QPSK 1_1	167300/836.5	100%	0.425	0.09	24.36	25.00	1.159	0.492	22.2
Hotspot Test data (Separate 10mm 50%RB) State4											
Front side	20	QPSK 50_28	167300/836.5	100%	0.314	-0.10	24.28	25.00	1.180	0.371	22.2
Back side	20	QPSK 50_28	167300/836.5	100%	0.358	0.18	24.28	25.00	1.180	0.423	22.2
Left side	20	QPSK 50_28	167300/836.5	100%	0.164	-0.11	24.28	25.00	1.180	0.194	22.2
Right side	20	QPSK 50_28	167300/836.5	100%	0.269	0.08	24.28	25.00	1.180	0.318	22.2
Bottom side	20	QPSK 50_28	167300/836.5	100%	0.457	-0.19	24.28	25.00	1.180	0.539	22.2

Ant3 Test Record											
Test position	BW.	Modulation	Test ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1-g (W/kg)	Liquid Temp.(°C)
Head Test Data (1RB) State3											
Left cheek	10	QPSK 1_1	462000/2310	100%	0.298	0.04	17.73	18.50	1.194	0.356	22.2
Left tilted	10	QPSK 1_1	462000/2310	100%	0.398	0.14	17.73	18.50	1.194	0.475	22.2
Right cheek	10	QPSK 1_1	462000/2310	100%	0.775	-0.14	17.73	18.50	1.194	0.925	22.2
Right tilted	10	QPSK 1_1	462000/2310	100%	0.763	-0.08	17.73	18.50	1.194	0.911	22.2
Head Test Data (50%RB) State3											
Left cheek	10	QPSK 25_14	462000/2310	100%	0.309	-0.03	17.69	18.50	1.205	0.372	22.2
Left tilted	10	QPSK 25_14	462000/2310	100%	0.423	-0.10	17.69	18.50	1.205	0.510	22.2
Right cheek	10	QPSK 25_14	462000/2310	100%	0.812	0.07	17.69	18.50	1.205	0.978	22.2
Right cheek-repeated	10	QPSK 25_14	462000/2310	100%	0.806	0.02	17.69	18.50	1.205	0.971	22.2
Right tilted	10	QPSK 25_14	462000/2310	100%	0.772	0.15	17.69	18.50	1.205	0.930	22.2
Head Test Data (100%RB) State3											
Right cheek	10	QPSK 50_0	462000/2310	100%	0.605	0.18	17.59	18.50	1.233	0.746	22.2
Right tilted	10	QPSK 50_0	462000/2310	100%	0.579	-0.17	17.59	18.50	1.233	0.714	22.2
Head Test Data (1RB) State3 (ENDC)											
Left cheek	10	QPSK 1_1	462000/2310	100%	0.298	0.04	17.73	16.00	0.671	0.200	22.2
Left tilted	10	QPSK 1_1	462000/2310	100%	0.398	0.14	17.73	16.00	0.671	0.267	22.2
Right cheek	10	QPSK 1_1	462000/2310	100%	0.775	-0.14	17.73	16.00	0.671	0.520	22.2
Right tilted	10	QPSK 1_1	462000/2310	100%	0.763	-0.08	17.73	16.00	0.671	0.512	22.2
Head Test Data (50%RB) State3											
Left cheek	10	QPSK 25_14	462000/2310	100%	0.309	-0.03	17.69	16.00	0.678	0.209	22.2
Left tilted	10	QPSK 25_14	462000/2310	100%	0.423	-0.10	17.69	16.00	0.678	0.287	22.2
Right cheek	10	QPSK 25_14	462000/2310	100%	0.812	0.07	17.69	16.00	0.678	0.550	22.2
Right cheek-repeated	10	QPSK 25_14	462000/2310	100%	0.806	0.02	17.69	16.00	0.678	0.546	22.2
Right tilted	10	QPSK 25_14	462000/2310	100%	0.772	0.15	17.69	16.00	0.678	0.523	22.2
Head Test Data (100%RB) State3											
Right cheek	10	QPSK 50_0	462000/2310	100%	0.605	0.18	17.59	16.00	0.693	0.420	22.2
Right tilted	10	QPSK 50_0	462000/2310	100%	0.579	-0.17	17.59	16.00	0.693	0.401	22.2
Body worn Test data (Separate 15mm 1RB) State0											
Front side	10	QPSK 1_1	462000/2310	100%	0.373	0.04	23.77	24.50	1.183	0.441	22.2
Back side	10	QPSK 1_1	462000/2310	100%	0.789	-0.07	23.77	24.50	1.183	0.933	22.2
Body worn Test data (Separate 15mm 50%RB) State0											
Front side	10	QPSK 25_14	462000/2310	100%	0.381	-0.03	23.75	24.50	1.189	0.453	22.2
Back side	10	QPSK 25_14	462000/2310	100%	0.808	0.07	23.75	24.50	1.189	0.960	22.2
Body worn Test data (Separate 15mm 100%RB) State0											
Back side	10	QPSK 50_0	462000/2310	100%	0.612	0.03	22.60	23.50	1.230	0.753	22.2
Body worn Test data (Separate 15mm 1RB) State1(ENDC)											
Front side	10	QPSK 1_1	462000/2310	100%	0.373	0.04	23.77	22.00	0.665	0.248	22.2
Back side	10	QPSK 1_1	462000/2310	100%	0.789	-0.07	23.77	22.00	0.665	0.525	22.2
Body worn Test data (Separate 15mm 50%RB) State1(ENDC)											
Front side	10	QPSK 25_14	462000/2310	100%	0.381	-0.03	23.75	22.00	0.668	0.255	22.2
Back side	10	QPSK 25_14	462000/2310	100%	0.808	0.07	23.75	22.00	0.668	0.540	22.2
Body worn Test data (Separate 15mm 100%RB) State1(ENDC)											
Back side	10	QPSK 50_0	462000/2310	100%	0.612	0.03	22.60	22.00	0.871	0.533	22.2
Hotspot Test data (Separate 10mm 1RB) State4											
Front side	10	QPSK 1_1	462000/2310	100%	0.258	-0.04	21.26	22.00	1.186	0.306	22.2
Back side	10	QPSK 1_1	462000/2310	100%	0.655	-0.03	21.26	22.00	1.186	0.777	22.2
Left side	10	QPSK 1_1	462000/2310	100%	0.161	0.15	21.26	22.00	1.186	0.191	22.2
Top side	10	QPSK 1_1	462000/2310	100%	0.627	0.16	21.26	22.00	1.186	0.743	22.2
Hotspot Test data (Separate 10mm 50%RB) State4											



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032311

Rev.: 01

Page: 90 of 123

Front side	10	QPSK 25_14	462000/2310	100%	0.265	0.14	21.23	22.00	1.194	0.316	22.2
Back side	10	QPSK 25_14	462000/2310	100%	0.698	0.19	21.23	22.00	1.194	0.833	22.2
Left side	10	QPSK 25_14	462000/2310	100%	0.172	-0.03	21.23	22.00	1.194	0.205	22.2
Top side	10	QPSK 25_14	462000/2310	100%	0.674	-0.03	21.23	22.00	1.194	0.805	22.2
Hotspot Test data (Separate 10mm 100%RB) State4											
Back side	10	QPSK 50_0	462000/2310	100%	0.529	-0.16	21.07	22.00	1.239	0.655	22.2
Top side	10	QPSK 50_0	462000/2310	100%	0.471	0.09	21.07	22.00	1.239	0.583	22.2
Hotspot Test data (Separate 10mm 1RB) State4 (ENDC)											
Front side	10	QPSK 1_1	462000/2310	100%	0.258	-0.04	21.26	20.00	0.748	0.193	22.2
Back side	10	QPSK 1_1	462000/2310	100%	0.655	-0.03	21.26	20.00	0.748	0.490	22.2
Left side	10	QPSK 1_1	462000/2310	100%	0.161	0.15	21.26	20.00	0.748	0.120	22.2
Top side	10	QPSK 1_1	462000/2310	100%	0.627	0.16	21.26	20.00	0.748	0.469	22.2
Hotspot Test data (Separate 10mm 50%RB) State4 (ENDC)											
Front side	10	QPSK 25_14	462000/2310	100%	0.265	0.14	21.23	20.00	0.753	0.200	22.2
Back side	10	QPSK 25_14	462000/2310	100%	0.698	0.19	21.23	20.00	0.753	0.526	22.2
Left side	10	QPSK 25_14	462000/2310	100%	0.172	-0.03	21.23	20.00	0.753	0.130	22.2
Top side	10	QPSK 25_14	462000/2310	100%	0.674	-0.03	21.23	20.00	0.753	0.508	22.2
Hotspot Test data (Separate 10mm 100%RB) State4 (ENDC)											
Back side	10	QPSK 50_0	462000/2310	100%	0.529	-0.16	21.07	20.00	0.782	0.413	22.2
Top side	10	QPSK 50_0	462000/2310	100%	0.471	0.09	21.07	20.00	0.782	0.368	22.2
Test position	BW.	Modulation	Test ch./Freq.	Duty Cycle	SAR (W/kg) 10-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled 10-g SAR(W/kg)	Liquid Temp.(°C)
Product specific 10g SAR Test data (Separate 0mm 1RB,Sensor on) State1											
Back side	10	QPSK 1_1	462000/2310	100%	2.240	0.02	21.26	22.00	1.186	2.656	22.2
Top side	10	QPSK 1_1	462000/2310	100%	2.300	0.17	21.26	22.00	1.186	2.727	22.2
Product specific 10g SAR Test data (Separate 0mm 50%RB,Sensor on) State1											
Back side	10	QPSK 25_14	462000/2310	100%	2.390	-0.10	21.23	22.00	1.194	2.854	22.2
Top side	10	QPSK 25_14	462000/2310	100%	2.420	-0.11	21.23	22.00	1.194	2.889	22.2
Top side-repeated	10	QPSK 25_14	462000/2310	100%	2.390	0.06	21.23	22.00	1.194	2.854	22.2
Product specific 10g SAR Test data (Separate 0mm 100%RB,Sensor on) State1											
Back side	10	QPSK 50_0	462000/2310	100%	2.030	-0.03	21.07	22.00	1.239	2.515	22.2
Top side	10	QPSK 50_0	462000/2310	100%	2.110	0.06	21.07	22.00	1.239	2.614	22.2
Product specific 10g SAR Test data (1RB,Sensor off) State1											
Back side-13mm	10	QPSK 1_1	462000/2310	100%	0.481	0.01	23.77	24.50	1.183	0.569	22.2
Top side-14mm	10	QPSK 1_1	462000/2310	100%	0.467	0.04	23.77	24.50	1.183	0.552	22.2

Test Position	Test ch./Freq.	Measured SAR (W/kg)	1 st Repeated	Ratio	2 nd Repeated	3 rd Repeated
Right cheek	462000/2310	0.812	0.806	1.007	N/A	N/A
Top side 0mm	462000/2310	2.420	2.390	1.013	N/A	N/A

Note: 1) When the original highest measured SAR is ≥ 0.80 W/kg, the measurement was repeated once.

2) A second repeated measurement was performed only if the ratio of largest to smallest SAR for the original and first repeated measurements was > 1.20 or when the original or repeated measurement was ≥ 1.45 W/kg ($\sim 10\%$ from the 1-g SAR limit).

3) A third repeated measurement was performed only if the original, first or second repeated measurement was ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

4) Repeated measurements are not required when the original highest measured SAR is < 0.80 W/kg

5) The same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds. The repeated measurement results must be clearly identified in the SAR report.



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032311

Rev.: 01

Page: 91 of 123

8.2.14 SAR Result of 5G NR n66

Ant3 Test Record											
Test position	BW.	Modulation	Test ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1-g (W/kg)	Liquid Temp.(°C)
Head Test Data (1RB) State3											
Left cheek	40	QPSK 1_1	349000/1745	100%	0.420	0.13	18.85	20.00	1.303	0.547	22.4
Left tilted	40	QPSK 1_1	349000/1745	100%	0.505	0	18.85	20.00	1.303	0.658	22.4
Right cheek	40	QPSK 1_1	349000/1745	100%	0.737	-0.02	18.85	20.00	1.303	0.960	22.4
Right tilted	40	QPSK 1_1	349000/1745	100%	0.782	-0.01	18.85	20.00	1.303	1.019	22.4
Head Test Data (50%RB) State3											
Left cheek	40	QPSK 108_54	349000/1745	100%	0.447	0.19	18.83	20.00	1.309	0.585	22.4
Left tilted	40	QPSK 108_54	349000/1745	100%	0.529	0.12	18.83	20.00	1.309	0.693	22.4
Right cheek	40	QPSK 108_54	349000/1745	100%	0.754	0.07	18.83	20.00	1.309	0.987	22.4
Right tilted	40	QPSK 108_54	349000/1745	100%	0.792	-0.13	18.83	20.00	1.309	1.037	22.4
Head Test Data (100%RB) State3											
Right cheek	40	QPSK 216_0	349000/1745	100%	0.652	0.08	18.52	20.00	1.406	0.917	22.4
Right tilted	40	QPSK 216_0	349000/1745	100%	0.687	-0.18	18.52	20.00	1.406	0.966	22.4
Head Test Data (1RB) State3 (ENDC)											
Left cheek	40	QPSK 1_1	349000/1745	100%	0.420	0.13	18.85	17.50	0.733	0.308	22.4
Left tilted	40	QPSK 1_1	349000/1745	100%	0.505	0	18.85	17.50	0.733	0.370	22.4
Right cheek	40	QPSK 1_1	349000/1745	100%	0.737	-0.02	18.85	17.50	0.733	0.540	22.4
Right tilted	40	QPSK 1_1	349000/1745	100%	0.782	-0.01	18.85	17.50	0.733	0.573	22.4
Head Test Data (50%RB) State3											
Left cheek	40	QPSK 108_54	349000/1745	100%	0.447	0.19	18.83	17.50	0.736	0.329	22.4
Left tilted	40	QPSK 108_54	349000/1745	100%	0.529	0.12	18.83	17.50	0.736	0.389	22.4
Right cheek	40	QPSK 108_54	349000/1745	100%	0.754	0.07	18.83	17.50	0.736	0.555	22.4
Right tilted	40	QPSK 108_54	349000/1745	100%	0.792	-0.13	18.83	17.50	0.736	0.583	22.4
Head Test Data (100%RB) State3											
Right cheek	40	QPSK 216_0	349000/1745	100%	0.652	0.08	18.52	17.50	0.791	0.516	22.4
Right tilted	40	QPSK 216_0	349000/1745	100%	0.687	-0.18	18.52	17.50	0.791	0.543	22.4
Body worn Test data (Separate 15mm 1RB) State0											
Front side	40	QPSK 1_1	349000/1745	100%	0.322	0.09	23.87	25.00	1.297	0.418	22.4
Back side	40	QPSK 1_1	349000/1745	100%	0.484	-0.03	23.87	25.00	1.297	0.628	22.4
Body worn Test data (Separate 15mm 50%RB) State0											
Front side	40	QPSK 108_54	349000/1745	100%	0.350	0.04	23.86	25.00	1.300	0.455	22.4
Back side	40	QPSK 108_54	349000/1745	100%	0.500	-0.09	23.86	25.00	1.300	0.650	22.4
Hotspot Test data (Separate 10mm 1RB) State4											
Front side	40	QPSK 1_1	349000/1745	100%	0.447	-0.04	22.86	24.00	1.300	0.581	22.4
Back side	40	QPSK 1_1	349000/1745	100%	0.738	0.09	22.86	24.00	1.300	0.960	22.4
Left side	40	QPSK 1_1	349000/1745	100%	0.238	0.16	22.86	24.00	1.300	0.309	22.4
Top side	40	QPSK 1_1	349000/1745	100%	0.600	-0.09	22.86	24.00	1.300	0.780	22.4
Hotspot Test data (Separate 10mm 50%RB) State4											
Front side	40	QPSK 108_54	349000/1745	100%	0.455	-0.04	22.86	24.00	1.300	0.592	22.4
Back side	40	QPSK 108_54	349000/1745	100%	0.796	0.03	22.86	24.00	1.300	1.035	22.4
Left side	40	QPSK 108_54	349000/1745	100%	0.244	0.07	22.86	24.00	1.300	0.317	22.4
Top side	40	QPSK 108_54	349000/1745	100%	0.628	0.04	22.86	24.00	1.300	0.817	22.4
Hotspot Test data (Separate 10mm 100%RB) State4											
Back side	40	QPSK 216_0	349000/1745	100%	0.723	-0.12	22.51	24.00	1.409	1.019	22.4
Top side	40	QPSK 216_0	349000/1745	100%	0.557	-0.16	22.51	24.00	1.409	0.785	22.4



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032311

Rev.: 01

Page: 92 of 123

Hotspot Test data (Separate 10mm 1RB) State4 (ENDC)											
Front side	40	QPSK 1_1	349000/1745	100%	0.447	-0.04	22.86	21.00	0.652	0.291	22.4
Back side	40	QPSK 1_1	349000/1745	100%	0.738	0.09	22.86	21.00	0.652	0.481	22.4
Left side	40	QPSK 1_1	349000/1745	100%	0.238	0.16	22.86	21.00	0.652	0.155	22.4
Top side	40	QPSK 1_1	349000/1745	100%	0.600	-0.09	22.86	21.00	0.652	0.391	22.4
Hotspot Test data (Separate 10mm 50%RB) State4 (ENDC)											
Front side	40	QPSK 108_54	349000/1745	100%	0.455	-0.04	22.86	21.00	0.652	0.296	22.4
Back side	40	QPSK 108_54	349000/1745	100%	0.796	0.03	22.86	21.00	0.652	0.519	22.4
Left side	40	QPSK 108_54	349000/1745	100%	0.244	0.07	22.86	21.00	0.652	0.159	22.4
Top side	40	QPSK 108_54	349000/1745	100%	0.628	0.04	22.86	21.00	0.652	0.409	22.4
Hotspot Test data (Separate 10mm 100%RB) State4 (ENDC)											
Back side	40	QPSK 216_0	349000/1745	100%	0.723	-0.12	22.51	21.00	0.706	0.511	22.4
Top side	40	QPSK 216_0	349000/1745	100%	0.557	-0.16	22.51	21.00	0.706	0.393	22.4
Test position	BW.	Modulation	Test ch./Freq.	Duty Cycle	SAR (W/kg) 10-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled 10-g SAR(W/kg)	Liquid Temp.(°C)
Product specific 10g SAR Test data (Separate 0mm 1RB) State1											
Back side	40	QPSK 1_1	349000/1745	100%	2.360	-0.03	23.87	25.00	1.297	3.061	22.4
Product specific 10g SAR Test data (Separate 0mm 50%RB) State1											
Back side	40	QPSK 108_54	349000/1745	100%	2.430	-0.08	23.86	25.00	1.300	3.159	22.4
Back side-repeated	40	QPSK 108_54	349000/1745	100%	2.390	0.03	23.86	25.00	1.300	3.107	22.4
Product specific 10g SAR Test data (Separate 0mm 100%RB) State1											
Back side	40	QPSK 216_0	349000/1745	100%	1.820	0.16	22.55	24.00	1.396	2.541	22.4
Ant1 Test Record											
Test position	BW.	Modulation	Test ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1-g (W/kg)	Liquid Temp.(°C)
Head Test Data (1RB) State3											
Left cheek	40	QPSK 1_1	349000/1745	100%	0.259	0.19	23.63	25.00	1.371	0.355	22.4
Left tilted	40	QPSK 1_1	349000/1745	100%	0.162	0.17	23.63	25.00	1.371	0.222	22.4
Right cheek	40	QPSK 1_1	349000/1745	100%	0.187	0	23.63	25.00	1.371	0.256	22.4
Right tilted	40	QPSK 1_1	349000/1745	100%	0.134	0.1	23.63	25.00	1.371	0.184	22.4
Head Test Data (50%RB) State3											
Left cheek	40	QPSK 108_54	349000/1745	100%	0.268	0.13	23.63	25.00	1.371	0.367	22.4
Left tilted	40	QPSK 108_54	349000/1745	100%	0.173	-0.12	23.63	25.00	1.371	0.237	22.4
Right cheek	40	QPSK 108_54	349000/1745	100%	0.193	-0.17	23.63	25.00	1.371	0.265	22.4
Right tilted	40	QPSK 108_54	349000/1745	100%	0.148	-0.14	23.63	25.00	1.371	0.203	22.4
Body worn Test data (Separate 15mm 1RB) State0											
Front side	40	QPSK 1_1	349000/1745	100%	0.311	-0.06	23.63	25.00	1.371	0.426	22.4
Back side	40	QPSK 1_1	349000/1745	100%	0.412	0.19	23.63	25.00	1.371	0.565	22.4
Body worn Test data (Separate 15mm 50%RB) State0											
Front side	40	QPSK 108_54	349000/1745	100%	0.338	0.15	23.63	25.00	1.371	0.463	22.4
Back side	40	QPSK 108_54	349000/1745	100%	0.442	0.01	23.63	25.00	1.371	0.606	22.4
Hotspot Test data (Separate 10mm 1RB) State4											
Front side	40	QPSK 1_1	349000/1745	100%	0.355	0.01	23.63	25.00	1.371	0.487	22.4
Back side	40	QPSK 1_1	349000/1745	100%	0.661	-0.1	23.63	25.00	1.371	0.906	22.4
Left side	40	QPSK 1_1	349000/1745	100%	0.422	0.01	23.63	25.00	1.371	0.579	22.4
Bottom side	40	QPSK 1_1	349000/1745	100%	0.415	-0.16	23.63	25.00	1.371	0.569	22.4
Hotspot Test data (Separate 10mm 50%RB) State4											
Front side	40	QPSK 108_54	349000/1745	100%	0.362	0.11	23.63	25.00	1.371	0.496	22.4
Back side	40	QPSK 108_54	349000/1745	100%	0.674	-0.13	23.63	25.00	1.371	0.924	22.4



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032311

Rev.: 01

Page: 93 of 123

Left side	40	QPSK 108_54	349000/1745	100%	0.433	-0.17	23.63	25.00	1.371	0.594	22.4
Bottom side	40	QPSK 108_54	349000/1745	100%	0.447	0.08	23.63	25.00	1.371	0.613	22.4
Hotspot Test data (Separate 10mm 100%RB) State4											
Back side	40	QPSK 216_0	349000/1745	100%	0.505	0.07	22.53	24.00	1.403	0.708	22.4

Test Position	Test ch./Freq.	Measured SAR (W/kg)	1 st Repeated	Ratio	2 nd Repeated	3 rd Repeated
Back side 0mm	349000/1745	2.430	2.390	1.017	N/A	N/A

Note: 1) When the original highest measured SAR is ≥ 0.80 W/kg, the measurement was repeated once.

2) A second repeated measurement was performed only if the ratio of largest to smallest SAR for the original and first repeated measurements was > 1.20 or when the original or repeated measurement was ≥ 1.45 W/kg ($\sim 10\%$ from the 1-g SAR limit).

3) A third repeated measurement was performed only if the original, first or second repeated measurement was ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

4) Repeated measurements are not required when the original highest measured SAR is < 0.80 W/kg

5) The same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds. The repeated measurement results must be clearly identified in the SAR report.



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032311

Rev.: 01

Page: 94 of 123

8.2.15 SAR Result of 5G NR n77 (3450-3550 MHz)

Ant4 Test Record											
Test position	BW.	Modulation	Test ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1-g (W/kg)	Liquid Temp.(°C)
Head Test Data (1RB) State3											
Left cheek	100	QPSK 1_1	633334/3500.01	100%	0.138	0.12	17.94	19.00	1.276	0.176	22.3
Left tilted	100	QPSK 1_1	633334/3500.01	100%	0.093	-0.03	17.94	19.00	1.276	0.119	22.3
Right cheek	100	QPSK 1_1	633334/3500.01	100%	0.559	-0.11	17.94	19.00	1.276	0.714	22.3
Right tilted	100	QPSK 1_1	633334/3500.01	100%	0.308	-0.01	17.94	19.00	1.276	0.393	22.3
Head Test Data (50%RB) State3											
Left cheek	100	QPSK 135_69	633334/3500.01	100%	0.143	-0.01	17.90	19.00	1.288	0.184	22.3
Left tilted	100	QPSK 135_69	633334/3500.01	100%	0.096	-0.08	17.90	19.00	1.288	0.124	22.3
Right cheek	100	QPSK 135_69	633334/3500.01	100%	0.596	0.02	17.90	19.00	1.288	0.768	22.3
Right tilted	100	QPSK 135_69	633334/3500.01	100%	0.301	-0.05	17.90	19.00	1.288	0.388	22.3
Head Test Data (1RB) State3 (ENDC)											
Left cheek	100	QPSK 1_1	633334/3500.01	100%	0.138	0.12	17.94	16.00	0.640	0.088	22.3
Left tilted	100	QPSK 1_1	633334/3500.01	100%	0.093	-0.03	17.94	16.00	0.640	0.059	22.3
Right cheek	100	QPSK 1_1	633334/3500.01	100%	0.559	-0.11	17.94	16.00	0.640	0.358	22.3
Right tilted	100	QPSK 1_1	633334/3500.01	100%	0.308	-0.01	17.94	16.00	0.640	0.197	22.3
Head Test Data (50%RB) State3											
Left cheek	100	QPSK 135_69	633334/3500.01	100%	0.143	-0.01	17.90	16.00	0.646	0.092	22.3
Left tilted	100	QPSK 135_69	633334/3500.01	100%	0.096	-0.08	17.90	16.00	0.646	0.062	22.3
Right cheek	100	QPSK 135_69	633334/3500.01	100%	0.596	0.02	17.90	16.00	0.646	0.385	22.3
Right tilted	100	QPSK 135_69	633334/3500.01	100%	0.301	-0.05	17.90	16.00	0.646	0.194	22.3
Body worn Test data (Separate 15mm 1RB) State0											
Front side	100	QPSK 1_1	633334/3500.01	100%	0.415	0.04	26.47	27.50	1.268	0.526	22.3
Back side	100	QPSK 1_1	633334/3500.01	100%	0.486	0.18	26.47	27.50	1.268	0.616	22.3
Body worn Test data (Separate 15mm 50%RB) State0											
Front side	100	QPSK 135_69	633334/3500.01	100%	0.428	-0.08	26.41	27.50	1.285	0.550	22.3
Back side	100	QPSK 135_69	633334/3500.01	100%	0.503	-0.10	26.41	27.50	1.285	0.646	22.3
Hotspot Test data (Separate 10mm 1RB) State4											
Front side	100	QPSK 1_1	633334/3500.01	100%	0.162	-0.09	21.42	22.50	1.282	0.208	22.3
Back side	100	QPSK 1_1	633334/3500.01	100%	0.263	0.06	21.42	22.50	1.282	0.337	22.3
Left side	100	QPSK 1_1	633334/3500.01	100%	0.259	-0.01	21.42	22.50	1.282	0.332	22.3
Top side	100	QPSK 1_1	633334/3500.01	100%	0.131	0.01	21.42	22.50	1.282	0.168	22.3
Hotspot Test data (Separate 10mm 50%RB) State4											
Front side	100	QPSK 135_69	633334/3500.01	100%	0.169	0.08	21.36	22.50	1.300	0.220	22.3
Back side	100	QPSK 135_69	633334/3500.01	100%	0.295	-0.14	21.36	22.50	1.300	0.384	22.3
Left side	100	QPSK 135_69	633334/3500.01	100%	0.293	-0.02	21.36	22.50	1.300	0.381	22.3
Top side	100	QPSK 135_69	633334/3500.01	100%	0.133	-0.04	21.36	22.50	1.300	0.173	22.3
Hotspot Test data (Separate 10mm 1RB) State4 (ENDC)											
Front side	100	QPSK 1_1	633334/3500.01	100%	0.162	-0.09	21.42	20.00	0.721	0.117	22.3
Back side	100	QPSK 1_1	633334/3500.01	100%	0.263	0.06	21.42	20.00	0.721	0.190	22.3
Left side	100	QPSK 1_1	633334/3500.01	100%	0.259	-0.01	21.42	20.00	0.721	0.187	22.3
Top side	100	QPSK 1_1	633334/3500.01	100%	0.131	0.01	21.42	20.00	0.721	0.094	22.3
Hotspot Test data (Separate 10mm 50%RB) State4 (ENDC)											
Front side	100	QPSK 135_69	633334/3500.01	100%	0.169	0.08	21.36	20.00	0.731	0.124	22.3
Back side	100	QPSK 135_69	633334/3500.01	100%	0.295	-0.14	21.36	20.00	0.731	0.216	22.3
Left side	100	QPSK 135_69	633334/3500.01	100%	0.293	-0.02	21.36	20.00	0.731	0.214	22.3



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032311

Rev.: 01

Page: 95 of 123

Top side	100	QPSK 135_69	633334/3500.01	100%	0.133	-0.04	21.36	20.00	0.731	0.097	22.3
Test position	BW.	Modulation	Test ch./Freq.	Duty Cycle	SAR (W/kg) 10-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled 10-g SAR(W/kg)	Liquid Temp.(°C)
Product specific 10g SAR Test data (Separate 0mm 1RB,Sensor on) State0											
Back side	100	QPSK 1_1	633334/3500.01	100%	1.350	0.03	21.42	22.50	1.282	1.731	22.3
Left side	100	QPSK 1_1	633334/3500.01	100%	1.470	0.06	21.42	22.50	1.282	1.885	22.3
Product specific 10g SAR Test data (Separate 0mm 50%RB, Sensor on) State0											
Back side	100	QPSK 135_69	633334/3500.01	100%	1.440	-0.05	21.36	22.50	1.300	1.872	22.3
Left side	100	QPSK 135_69	633334/3500.01	100%	1.520	-0.04	21.36	22.50	1.300	1.976	22.3
Product specific 10g SAR Test data (Separate 0mm 1RB,Sensor off) State0											
Back side-4mm	100	QPSK 1_1	633334/3500.01	100%	0.465	0.09	26.47	27.50	1.268	0.589	22.3
Left side-4mm	100	QPSK 1_1	633334/3500.01	100%	0.477	-0.01	26.47	27.50	1.268	0.605	22.3



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032311

Rev.: 01

Page: 96 of 123

8.2.16 SAR Result of 5G NR n77 (3700-3980MHz)

Ant4 Test Record											
Test position	BW.	Modulation	Test ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1-g (W/kg)	Liquid Temp.(°C)
Head Test Data (1RB) State3											
Left cheek	100	QPSK 1_1	656000/3840	100%	0.198	-0.01	18.15	19.00	1.216	0.241	22.3
Left tilted	100	QPSK 1_1	656000/3840	100%	0.143	-0.13	18.15	19.00	1.216	0.174	22.3
Right cheek	100	QPSK 1_1	656000/3840	100%	0.965	-0.19	18.15	19.00	1.216	1.174	22.3
Right tilted	100	QPSK 1_1	656000/3840	100%	0.550	0.15	18.15	19.00	1.216	0.669	22.3
Head Test Data (50%RB) State3											
Left cheek	100	QPSK 135_69	656000/3840	100%	0.219	-0.1	18.14	19.00	1.219	0.267	22.3
Left tilted	100	QPSK 135_69	656000/3840	100%	0.146	0.14	18.14	19.00	1.219	0.178	22.3
Right cheek	100	QPSK 135_69	656000/3840	100%	0.969	0.04	18.14	19.00	1.219	1.181	22.3
Right tilted	100	QPSK 135_69	656000/3840	100%	0.513	0.07	18.14	19.00	1.219	0.625	22.3
Head Test Data (100%RB) State3											
Right cheek	100	QPSK 270_0	656000/3840	100%	0.903	0.17	17.95	19.00	1.274	1.150	22.3
Head Test Data (1RB) State3 (ENDC)											
Left cheek	100	QPSK 1_1	656000/3840	100%	0.198	-0.01	18.15	16.00	0.610	0.121	22.3
Left tilted	100	QPSK 1_1	656000/3840	100%	0.143	-0.13	18.15	16.00	0.610	0.087	22.3
Right cheek	100	QPSK 1_1	656000/3840	100%	0.965	-0.19	18.15	16.00	0.610	0.588	22.3
Right tilted	100	QPSK 1_1	656000/3840	100%	0.550	0.15	18.15	16.00	0.610	0.335	22.3
Head Test Data (50%RB) State3											
Left cheek	100	QPSK 135_69	656000/3840	100%	0.219	-0.1	18.14	16.00	0.611	0.134	22.3
Left tilted	100	QPSK 135_69	656000/3840	100%	0.146	0.14	18.14	16.00	0.611	0.089	22.3
Right cheek	100	QPSK 135_69	656000/3840	100%	0.969	0.04	18.14	16.00	0.611	0.592	22.3
Right tilted	100	QPSK 135_69	656000/3840	100%	0.513	0.07	18.14	16.00	0.611	0.313	22.3
Head Test Data (100%RB) State3											
Right cheek	100	QPSK 270_0	656000/3840	100%	0.903	0.17	17.95	16.00	0.638	0.576	22.3
Body worn Test data (Separate 15mm 1RB) State0											
Front side	100	QPSK 1_1	656000/3840	100%	0.404	-0.06	26.68	27.50	1.208	0.488	22.3
Back side	100	QPSK 1_1	656000/3840	100%	0.464	-0.01	26.68	27.50	1.208	0.560	22.3
Body worn Test data (Separate 15mm 50%RB) State0											
Front side	100	QPSK 135_69	656000/3840	100%	0.415	-0.12	26.63	27.50	1.222	0.507	22.3
Back side	100	QPSK 135_69	656000/3840	100%	0.484	0.15	26.63	27.50	1.222	0.591	22.3
Hotspot Test data (Separate 10mm 1RB) State4											
Front side	100	QPSK 1_1	656000/3840	100%	0.418	0.11	21.67	22.50	1.211	0.506	22.3
Back side	100	QPSK 1_1	656000/3840	100%	0.592	0.17	21.67	22.50	1.211	0.717	22.3
Left side	100	QPSK 1_1	656000/3840	100%	0.751	-0.05	21.67	22.50	1.211	0.909	22.3
Top side	100	QPSK 1_1	656000/3840	100%	0.215	0.05	21.67	22.50	1.211	0.260	22.3
Hotspot Test data (Separate 10mm 50%RB) State4											
Front side	100	QPSK 135_69	656000/3840	100%	0.454	-0.16	21.60	22.50	1.230	0.559	22.3
Back side	100	QPSK 135_69	656000/3840	100%	0.641	0.15	21.60	22.50	1.230	0.789	22.3
Left side	100	QPSK 135_69	656000/3840	100%	0.783	0.19	21.60	22.50	1.230	0.963	22.3
Top side	100	QPSK 135_69	656000/3840	100%	0.226	-0.1	21.60	22.50	1.230	0.278	22.3
Hotspot Test data (Separate 10mm 100%RB) State4											
Left side	100	QPSK 270_0	656000/3840	100%	0.544	-0.12	21.47	22.50	1.268	0.690	22.3
Hotspot Test data (Separate 10mm 1RB) State4 (ENDC)											
Front side	100	QPSK 1_1	656000/3840	100%	0.418	0.11	21.67	20.00	0.681	0.285	22.3
Back side	100	QPSK 1_1	656000/3840	100%	0.592	0.17	21.67	20.00	0.681	0.403	22.3



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032311

Rev.: 01

Page: 97 of 123

Left side	100	QPSK 1_1	656000/3840	100%	0.751	-0.05	21.67	20.00	0.681	0.511	22.3
Top side	100	QPSK 1_1	656000/3840	100%	0.215	0.05	21.67	20.00	0.681	0.146	22.3
Hotspot Test data (Separate 10mm 50%RB) State4 (ENDC)											
Front side	100	QPSK 135_69	656000/3840	100%	0.454	-0.16	21.60	20.00	0.692	0.314	22.3
Back side	100	QPSK 135_69	656000/3840	100%	0.641	0.15	21.60	20.00	0.692	0.443	22.3
Left side	100	QPSK 135_69	656000/3840	100%	0.783	0.19	21.60	20.00	0.692	0.542	22.3
Top side	100	QPSK 135_69	656000/3840	100%	0.226	-0.1	21.60	20.00	0.692	0.156	22.3
Hotspot Test data (Separate 10mm 100%RB) State4 (ENDC)											
Left side	100	QPSK 270_0	656000/3840	100%	0.544	-0.12	21.47	20.00	0.713	0.388	22.3
Test position	BW.	Modulation	Test ch./Freq.	Duty Cycle	SAR (W/kg) 10-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled 10-g SAR(W/kg)	Liquid Temp.(°C)
Product specific 10g SAR Test data (Separate 0mm 1RB,Sensor on) State1											
Back side	100	QPSK 1_1	656000/3840	100%	1.460	0.17	21.67	22.50	1.211	1.767	22.3
Left side	100	QPSK 1_1	656000/3840	100%	2.430	-0.13	21.67	22.50	1.211	2.942	22.3
Product specific 10g SAR Test data (Separate 0mm 50%RB,Sensor on) State1											
Back side	100	QPSK 135_69	656000/3840	100%	1.580	0.18	21.60	22.50	1.230	1.944	22.3
Left side	100	QPSK 135_69	656000/3840	100%	2.500	-0.09	21.60	22.50	1.230	3.076	22.3
Product specific 10g SAR Test data (Separate 0mm 100%RB,Sensor on) State1											
Left side	100	QPSK 270_0	656000/3840	100%	1.900	0.07	21.47	22.50	1.268	2.409	22.3
Product specific 10g SAR Test data (Separate 0mm 1RB,Sensor off) State0											
Back side-4mm	100	QPSK 1_1	656000/3840	100%	0.571	-0.01	26.68	27.50	1.208	0.690	22.3
Left side-4mm	100	QPSK 1_1	656000/3840	100%	0.584	0.09	26.68	27.50	1.208	0.705	22.3



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032311

Rev.: 01

Page: 98 of 123

8.2.17 SAR Result of WIFI 2.4G

Ant5 Test											
Test position	Test mode	Test ch./Freq.	Duty Cycle	Duty Cycle Scaled factor	SAR (W/kg) 1-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1-g (W/kg)	Liquid Temp.(℃)
Head Test Data											
Left cheek	802.11b	6/2437	100.00%	1.000	0.779	-0.14	17.36	18.50	1.300	1.013	22.3
Left tilted	802.11b	6/2437	100.00%	1.000	0.642	-0.12	17.36	18.50	1.300	0.835	22.3
Right cheek	802.11b	6/2437	100.00%	1.000	0.360	-0.12	17.36	18.50	1.300	0.468	22.3
Right tilted	802.11b	6/2437	100.00%	1.000	0.380	0.14	17.36	18.50	1.300	0.494	22.3
Head Test Data (Simultaneous)											
Left cheek	802.11b	6/2437	100.00%	1.000	0.779	-0.14	17.36	16.50	0.820	0.639	22.3
Left tilted	802.11b	6/2437	100.00%	1.000	0.642	-0.12	17.36	16.50	0.820	0.527	22.3
Right cheek	802.11b	6/2437	100.00%	1.000	0.360	-0.12	17.36	16.50	0.820	0.295	22.3
Right tilted	802.11b	6/2437	100.00%	1.000	0.380	0.14	17.36	16.50	0.820	0.312	22.3
Body worn Test data (Separate 15mm)											
Front side	802.11b	6/2437	100.00%	1.000	0.109	-0.18	18.38	19.50	1.294	0.141	22.3
Back side	802.11b	6/2437	100.00%	1.000	0.139	-0.06	18.38	19.50	1.294	0.180	22.3
Hotspot Test data (Separate 10mm)											
Front side	802.11b	6/2437	100.00%	1.000	0.195	-0.03	18.38	19.50	1.294	0.252	22.3
Back side	802.11b	6/2437	100.00%	1.000	0.274	-0.14	18.38	19.50	1.294	0.355	22.3
Right side	802.11b	6/2437	100.00%	1.000	0.235	0.01	18.38	19.50	1.294	0.304	22.3
Top side	802.11b	6/2437	100.00%	1.000	0.230	0.16	18.38	19.50	1.294	0.298	22.3



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032311

Rev.: 01

Page: 99 of 123

8.2.18 SAR Result of WIFI 5G

Ant5 Test											
Test position	Test mode	Test ch./Freq.	Duty Cycle	Duty Cycle Scaled factor	SAR (W/kg) 1-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1-g (W/kg)	Liquid Temp.(°C)
Head Test Data of U-NII-2A											
Left cheek	802.11ac 80M	58/5290	90.53%	1.105	0.672	0.06	14.37	15.50	1.297	0.963	22.3
Left tilted	802.11ac 80M	58/5290	90.53%	1.105	0.715	-0.04	14.37	15.50	1.297	1.025	22.3
Right cheek	802.11ac 80M	58/5290	90.53%	1.105	0.398	0.11	14.37	15.50	1.297	0.570	22.3
Right tilted	802.11ac 80M	58/5290	90.53%	1.105	0.452	0.04	14.37	15.50	1.297	0.648	22.3
Head Test Data of U-NII-2C											
Left cheek	802.11a	116/5580	97.48%	1.026	0.566	0.12	15.96	17.50	1.426	0.828	22.4
Left tilted	802.11a	116/5580	97.48%	1.026	0.776	0.08	15.96	17.50	1.426	1.135	22.4
Left tilted	802.11a	100/5500	97.48%	1.026	0.716	-0.14	15.73	17.50	1.503	1.104	22.4
Left tilted	802.11a	140/5700	97.48%	1.026	0.684	0.07	15.61	17.50	1.545	1.084	22.4
Right cheek	802.11a	116/5580	97.48%	1.026	0.283	0.13	15.96	17.50	1.426	0.414	22.4
Right tilted	802.11a	116/5580	97.48%	1.026	0.410	-0.04	15.96	17.50	1.426	0.600	22.4
Head Test Data of U-NII-3											
Left cheek	802.11a	157/5785	97.48%	1.026	0.582	0.05	15.35	17.00	1.462	0.873	22.4
Left tilted	802.11a	157/5785	97.48%	1.026	0.766	-0.18	15.35	17.00	1.462	1.149	22.4
Left tilted	802.11a	149/5745	97.48%	1.026	0.716	0.09	15.07	17.00	1.560	1.146	22.4
Left tilted	802.11a	165/5825	97.48%	1.026	0.721	-0.03	15.08	17.00	1.556	1.151	22.4
Right cheek	802.11a	157/5785	97.48%	1.026	0.286	-0.03	15.35	17.00	1.462	0.429	22.4
Right tilted	802.11a	157/5785	97.48%	1.026	0.402	-0.09	15.35	17.00	1.462	0.603	22.4
Head Test Data of U-NII-2A (Simultaneous)											
Left cheek	802.11ac 80M	58/5290	90.53%	1.105	0.672	0.06	14.37	12.50	0.650	0.483	22.3
Left tilted	802.11ac 80M	58/5290	90.53%	1.105	0.715	-0.04	14.37	12.50	0.650	0.513	22.3
Right cheek	802.11ac 80M	58/5290	90.53%	1.105	0.398	0.11	14.37	12.50	0.650	0.286	22.3
Right tilted	802.11ac 80M	58/5290	90.53%	1.105	0.452	0.04	14.37	12.50	0.650	0.325	22.3
Head Test Data of U-NII-2C (Simultaneous)											
Left cheek	802.11a	116/5580	97.48%	1.026	0.566	0.12	15.96	14.50	0.714	0.415	22.4
Left tilted	802.11a	116/5580	97.48%	1.026	0.776	0.08	15.96	14.50	0.714	0.569	22.4
Left tilted	802.11a	100/5500	97.48%	1.026	0.716	-0.14	15.73	14.50	0.753	0.553	22.4
Left tilted	802.11a	140/5700	97.48%	1.026	0.684	0.07	15.61	14.50	0.774	0.543	22.4
Right cheek	802.11a	116/5580	97.48%	1.026	0.283	0.13	15.96	14.50	0.714	0.207	22.4
Right tilted	802.11a	116/5580	97.48%	1.026	0.410	-0.04	15.96	14.50	0.714	0.301	22.4
Head Test Data of U-NII-3 (Simultaneous)											
Left cheek	802.11a	157/5785	97.48%	1.026	0.582	0.05	15.35	14.00	0.733	0.438	22.4
Left tilted	802.11a	157/5785	97.48%	1.026	0.766	-0.18	15.35	14.00	0.733	0.576	22.4
Left tilted	802.11a	149/5745	97.48%	1.026	0.716	0.09	15.07	14.00	0.782	0.574	22.4
Left tilted	802.11a	165/5825	97.48%	1.026	0.721	-0.03	15.08	14.00	0.780	0.577	22.4
Right cheek	802.11a	157/5785	97.48%	1.026	0.286	-0.03	15.35	14.00	0.733	0.215	22.4
Right tilted	802.11a	157/5785	97.48%	1.026	0.402	-0.09	15.35	14.00	0.733	0.302	22.4
Body worn Test data of U-NII-2A (Separate 15mm)											
Front side	802.11a	64/5320	97.48%	1.026	0.167	0.06	18.23	19.50	1.340	0.230	22.3
Back side	802.11a	64/5320	97.48%	1.026	0.300	0.12	18.23	19.50	1.340	0.412	22.3
Body worn Test data of U-NII-2C (Separate 15mm)											
Front side	802.11a	116/5580	97.48%	1.026	0.196	0.12	17.99	19.50	1.416	0.285	22.4
Back side	802.11a	116/5580	97.48%	1.026	0.332	-0.02	17.99	19.50	1.416	0.482	22.4



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032311

Rev.: 01

Page: 100 of 123

Body worn Test data of U-NII-3 (Separate 15mm)											
Front side	802.11a	157/5785	97.48%	1.026	0.208	0.06	17.88	19.50	1.452	0.310	22.4
Back side	802.11a	157/5785	97.48%	1.026	0.381	0.19	17.88	19.50	1.452	0.568	22.4
Body worn Test data of U-NII-2A (Separate 15mm,Simultaneous)											
Front side	802.11a	64/5320	97.48%	1.026	0.167	0.06	18.23	18.00	0.948	0.162	22.3
Back side	802.11a	64/5320	97.48%	1.026	0.300	0.12	18.23	18.00	0.948	0.292	22.3
Body worn Test data of U-NII-2C (Separate 15mm,Simultaneous)											
Front side	802.11a	116/5580	97.48%	1.026	0.196	0.12	17.99	17.50	0.893	0.180	22.4
Back side	802.11a	116/5580	97.48%	1.026	0.332	-0.02	17.99	17.50	0.893	0.304	22.4
Body worn Test data of U-NII-3 (Separate 15mm,Simultaneous)											
Front side	802.11a	157/5785	97.48%	1.026	0.208	0.06	17.88	16.50	0.728	0.155	22.4
Back side	802.11a	157/5785	97.48%	1.026	0.381	0.19	17.88	16.50	0.728	0.284	22.4
Hotspot Test data of U-NII-1 (Separate 10mm)											
Front side	802.11a	48/5240	97.48%	1.026	0.070	-0.17	13.28	14.50	1.324	0.095	22.3
Back side	802.11a	48/5240	97.48%	1.026	0.173	-0.16	13.28	14.50	1.324	0.235	22.3
Right side	802.11a	48/5240	97.48%	1.026	0.047	-0.03	13.28	14.50	1.324	0.064	22.3
Top side	802.11a	48/5240	97.48%	1.026	0.279	0.10	13.28	14.50	1.324	0.379	22.3
Hotspot Test data of U-NII-3 (Separate 10mm)											
Front side	802.11a	157/5785	97.48%	1.026	0.107	-0.14	15.38	17.00	1.452	0.159	22.4
Back side	802.11a	157/5785	97.48%	1.026	0.207	0.07	15.38	17.00	1.452	0.308	22.4
Right side	802.11a	157/5785	97.48%	1.026	0.091	0.08	15.38	17.00	1.452	0.136	22.4
Top side	802.11a	157/5785	97.48%	1.026	0.269	0.16	15.38	17.00	1.452	0.401	22.4
Test position	Test mode	Test ch./Freq.	Duty Cycle	Duty Cycle Scaled factor	SAR (W/kg) 10-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 10-g (W/kg)	Liquid Temp.(°C)
Product specific 10gSAR Test data of U-NII-2A (Separate 0mm)											
Front side	802.11a	64/5320	97.48%	1.026	0.259	0.15	18.23	19.50	1.340	0.356	22.3
Back side	802.11a	64/5320	97.48%	1.026	0.228	-0.17	18.23	19.50	1.340	0.313	22.3
Right side	802.11a	64/5320	97.48%	1.026	0.132	0.07	18.23	19.50	1.340	0.181	22.3
Top side	802.11a	64/5320	97.48%	1.026	0.696	-0.02	18.23	19.50	1.340	0.957	22.3
Product specific 10gSAR Test data of U-NII-2C (Separate 0mm)											
Front side	802.11a	116/5580	97.48%	1.026	0.412	-0.12	17.99	19.50	1.416	0.598	22.4
Back side	802.11a	116/5580	97.48%	1.026	0.342	0.08	17.99	19.50	1.416	0.497	22.4
Right side	802.11a	116/5580	97.48%	1.026	0.175	-0.18	17.99	19.50	1.416	0.254	22.4
Top side	802.11a	116/5580	97.48%	1.026	0.752	-0.17	17.99	19.50	1.416	1.092	22.4
Product specific 10gSAR Test data of U-NII-2A (Separate 0mm,Simultaneous)											
Front side	802.11a	64/5320	97.48%	1.026	0.259	0.15	18.23	18.00	0.948	0.252	22.3
Back side	802.11a	64/5320	97.48%	1.026	0.228	-0.17	18.23	18.00	0.948	0.222	22.3
Right side	802.11a	64/5320	97.48%	1.026	0.132	0.07	18.23	18.00	0.948	0.128	22.3
Top side	802.11a	64/5320	97.48%	1.026	0.696	-0.02	18.23	18.00	0.948	0.677	22.3
Product specific 10gSAR Test data of U-NII-2C (Separate 0mm,Simultaneous)											
Front side	802.11a	116/5580	97.48%	1.026	0.412	-0.12	17.99	17.50	0.893	0.378	22.4
Back side	802.11a	116/5580	97.48%	1.026	0.342	0.08	17.99	17.50	0.893	0.313	22.4
Right side	802.11a	116/5580	97.48%	1.026	0.175	-0.18	17.99	17.50	0.893	0.160	22.4
Top side	802.11a	116/5580	97.48%	1.026	0.752	-0.17	17.99	17.50	0.893	0.689	22.4



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032311

Rev.: 01

Page: 101 of 123

8.2.19 SAR Result of BT

Ant5 Test											
Test position	Test mode	Test ch./Freq.	Duty Cycle	Duty Cycle Scaled factor	SAR (W/kg) 1-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1-g (W/kg)	Liquid Temp.(°C)
Head Test Data											
Left cheek	DH5	0/2402	76.71%	1.304	0.126	0.12	9.56	11.50	1.563	0.257	22.3
Left tilted	DH5	0/2402	76.71%	1.304	0.103	0.09	9.56	11.50	1.563	0.210	22.3
Right cheek	DH5	0/2402	76.71%	1.304	0.043	-0.01	9.56	11.50	1.563	0.088	22.3
Right tilted	DH5	0/2402	76.71%	1.304	0.040	0.08	9.56	11.50	1.563	0.082	22.3
Body worn Test data (Separate 15mm)											
Front side	DH5	0/2402	76.71%	1.304	0.006	0.03	9.56	11.50	1.563	0.012	22.3
Back side	DH5	0/2402	76.71%	1.304	0.011	-0.01	9.56	11.50	1.563	0.022	22.3
Hotspot Test data (Separate 10mm)											
Front side	DH5	0/2402	76.71%	1.304	0.018	-0.08	9.56	11.50	1.563	0.037	22.3
Back side	DH5	0/2402	76.71%	1.304	0.025	-0.16	9.56	11.50	1.563	0.051	22.3
Left side	DH5	0/2402	76.71%	1.304	0.006	-0.11	9.56	11.50	1.563	0.012	22.3
Right side	DH5	0/2402	76.71%	1.304	0.008	0.15	9.56	11.50	1.563	0.016	22.3
Top side	DH5	0/2402	76.71%	1.304	0.019	-0.12	9.56	11.50	1.563	0.039	22.3



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032311

Rev.: 01

Page: 102 of 123

8.2.20 SAR Result of NFC

NFC SAR Test Record									
Test position	Test mode	Test ch./Freq.	Duty Cycle	Duty Cycle Scaled factor	SAR (W/kg) 10-g	Power drift (dB)	Scaled factor	Scaled SAR 10-g (W/kg)	Liquid Temp.(°C)
NFC Test data (Separate 0mm)									
Front side	NFC	13.56MHz	100.00%	1.000	0.000	0.00	1.000	0.000	22.4
Back side	NFC	13.56MHz	100.00%	1.000	0.016	0.09	1.000	0.016	22.4
Left side	NFC	13.56MHz	100.00%	1.000	0.000	0.00	1.000	0.000	22.4
Right side	NFC	13.56MHz	100.00%	1.000	0.000	0.00	1.000	0.000	22.4
Top side	NFC	13.56MHz	100.00%	1.000	0.000	0.00	1.000	0.000	22.4
Bottom side	NFC	13.56MHz	100.00%	1.000	0.000	0.00	1.000	0.000	22.4



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032311

Rev.: 01

Page: 103 of 123

8.3 Multiple Transmitter Evaluation

8.3.1 Simultaneous SAR test evaluation

•Simultaneous Transmission Possibilities

No.	Simultaneous Tx Combination	Head	Body	Hotspot	Product Specific 10-g (0mm)
1	WWAN + WLAN 2.4GHz Ant5	Yes	Yes	Yes	Yes
2	WWAN + WLAN 5GHz Ant5 + BT	Yes	Yes	Yes	Yes
3	WWAN + WLAN 5GHz Ant5 + NFC	/	/	/	Yes

Note:

- 1) NFC is different from the working scenario of WWAN/WIFI(Head/Body-worn/Hotspot) and does participate in the simultaneous transmission.
- 2) Per FCC KDB Publication 648474 D04 Handset SAR, Phablet SAR tests were not required if wireless router 1g SAR(Scaled to the maximum output power ,including tolerance) $< 1.2 \text{ W/Kg}$. Therefore, no further analysis beyond tables included in this section was required to determine that possible Simultaneous transmission scenarios would not exceed the SAR limit.



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032311

Rev.: 01

Page: 104 of 123

8.3.2 Simultaneous Transmission SAR Summation Scenario

Head:

Test position		SARmax (W/kg)				Summed SAR	
		Main Ant0	WiFi 2.4G Ant5(chain0)	WiFi 5G Ant5(chain0)	BT		
		1	2	3	4	1+2	1+3+4
WCDMA V	Left cheek	0.306	0.639	0.483	0.257	0.945	1.046
	Left tilted	0.182	0.527	0.577	0.210	0.709	0.969
	Right cheek	0.387	0.295	0.286	0.088	0.682	0.761
	Right tilted	0.223	0.312	0.325	0.082	0.535	0.630
LTE Band 5	Left cheek	0.323	0.639	0.483	0.257	0.962	1.063
	Left tilted	0.192	0.527	0.577	0.210	0.719	0.979
	Right cheek	0.378	0.295	0.286	0.088	0.673	0.752
	Right tilted	0.226	0.312	0.325	0.082	0.538	0.633
LTE Band 12(17)	Left cheek	0.180	0.639	0.483	0.257	0.819	0.920
	Left tilted	0.112	0.527	0.577	0.210	0.639	0.899
	Right cheek	0.201	0.295	0.286	0.088	0.496	0.575
	Right tilted	0.091	0.312	0.325	0.082	0.403	0.498
LTE Band 14	Left cheek	0.243	0.639	0.483	0.257	0.882	0.983
	Left tilted	0.133	0.527	0.577	0.210	0.660	0.920
	Right cheek	0.251	0.295	0.286	0.088	0.546	0.625
	Right tilted	0.173	0.312	0.325	0.082	0.485	0.580
5G NR n5	Left cheek	0.325	0.639	0.483	0.257	0.964	1.065
	Left tilted	0.188	0.527	0.577	0.210	0.715	0.975
	Right cheek	0.369	0.295	0.286	0.088	0.664	0.743
	Right tilted	0.241	0.312	0.325	0.082	0.553	0.648

Test position		SARmax (W/kg)				Summed SAR	
		Main Ant3	WiFi 2.4G Ant5	WiFi 5G Ant5	BT		
		1	2	3	4	1+2	1+3+4
WCDMA II	Left cheek	0.571	0.639	0.483	0.257	1.210	1.311
	Left tilted	0.655	0.527	0.577	0.210	1.182	1.442
	Right cheek	1.015	0.295	0.286	0.088	1.310	1.389
	Right tilted	1.184	0.312	0.325	0.082	1.496	1.591
WCDMA IV	Left cheek	0.708	0.639	0.483	0.257	1.347	1.448
	Left tilted	0.703	0.527	0.577	0.210	1.230	1.490
	Right cheek	1.144	0.295	0.286	0.088	1.439	1.518
	Right tilted	1.160	0.312	0.325	0.082	1.472	1.567
LTE Band 2	Left cheek	0.479	0.639	0.483	0.257	1.118	1.219
	Left tilted	0.574	0.527	0.577	0.210	1.101	1.361
	Right cheek	0.975	0.295	0.286	0.088	1.270	1.349
	Right tilted	1.077	0.312	0.325	0.082	1.389	1.484
LTE Band 7	Left cheek	0.212	0.639	0.483	0.257	0.851	0.952
	Left tilted	0.332	0.527	0.577	0.210	0.859	1.119
	Right cheek	0.860	0.295	0.286	0.088	1.155	1.234
	Right tilted	0.961	0.312	0.325	0.082	1.273	1.368
LTE Band 30	Left cheek	0.286	0.639	0.483	0.257	0.925	1.026
	Left tilted	0.364	0.527	0.577	0.210	0.891	1.151
	Right cheek	0.923	0.295	0.286	0.088	1.218	1.297
	Right tilted	1.130	0.312	0.325	0.082	1.442	1.537



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032311

Rev.: 01

Page: 105 of 123

LTE Band 66(4)	Left cheek	0.592	0.639	0.483	0.257	1.231	1.332
	Left tilted	0.700	0.527	0.577	0.210	1.227	1.487
	Right cheek	1.116	0.295	0.286	0.088	1.411	1.490
	Right tilted	1.125	0.312	0.325	0.082	1.437	1.532
5G NR n2	Left cheek	0.594	0.639	0.483	0.257	1.233	1.334
	Left tilted	0.696	0.527	0.577	0.210	1.223	1.483
	Right cheek	1.138	0.295	0.286	0.088	1.433	1.512
	Right tilted	1.168	0.312	0.325	0.082	1.480	1.575
5G NR n30	Left cheek	0.372	0.639	0.483	0.257	1.011	1.112
	Left tilted	0.510	0.527	0.577	0.210	1.037	1.297
	Right cheek	0.978	0.295	0.286	0.088	1.273	1.352
	Right tilted	0.930	0.312	0.325	0.082	1.242	1.337
5G NR n66	Left cheek	0.585	0.639	0.483	0.257	1.224	1.325
	Left tilted	0.693	0.527	0.577	0.210	1.220	1.480
	Right cheek	0.987	0.295	0.286	0.088	1.282	1.361
	Right tilted	1.037	0.312	0.325	0.082	1.349	1.444

Test position		SARmax (W/kg)				Summed SAR	
		Main Ant4	WiFi 2.4G Ant5	WiFi 5G Ant5	BT		
		1	2	3	4	1+2	1+3+4
5G NR n77	Left cheek	0.267	0.639	0.483	0.257	0.906	1.007
	Left tilted	0.178	0.527	0.577	0.210	0.705	0.965
	Right cheek	1.181	0.295	0.286	0.088	1.476	1.555
	Right tilted	0.669	0.312	0.325	0.082	0.981	1.076

Test position		SARmax (W/kg)				Summed SAR	
		Inter-band UL CA	WiFi 2.4G Ant5(chain0)	WiFi 5G Ant5(chain0)	BT		
		1	2	3	4	1+2	1+3+4
CA_2A-5A	Left cheek	0.592	0.639	0.483	0.257	1.231	1.332
	Left tilted	0.515	0.527	0.577	0.210	1.042	1.302
	Right cheek	0.926	0.295	0.286	0.088	1.221	1.300
	Right tilted	0.831	0.312	0.325	0.082	1.143	1.238
CA_2A-12A	Left cheek	0.449	0.639	0.483	0.257	1.088	1.189
	Left tilted	0.435	0.527	0.577	0.210	0.962	1.222
	Right cheek	0.749	0.295	0.286	0.088	1.044	1.123
	Right tilted	0.696	0.312	0.325	0.082	1.008	1.103
CA_2A-14A	Left cheek	0.512	0.639	0.483	0.257	1.151	1.252
	Left tilted	0.456	0.527	0.577	0.210	0.983	1.243
	Right cheek	0.799	0.295	0.286	0.088	1.094	1.173
	Right tilted	0.778	0.312	0.325	0.082	1.090	1.185
CA_4A-12A	Left cheek	0.477	0.639	0.483	0.257	1.116	1.217
	Left tilted	0.463	0.527	0.577	0.210	0.990	1.250
	Right cheek	0.760	0.295	0.286	0.088	1.055	1.134
	Right tilted	0.655	0.312	0.325	0.082	0.967	1.062
CA_5A-30A	Left cheek	0.466	0.639	0.483	0.257	1.105	1.206
	Left tilted	0.374	0.527	0.577	0.210	0.901	1.161
	Right cheek	0.841	0.295	0.286	0.088	1.136	1.215
	Right tilted	0.792	0.312	0.325	0.082	1.104	1.199
CA_5A-66A	Left cheek	0.620	0.639	0.483	0.257	1.259	1.360



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032311

Rev.: 01

Page: 106 of 123

	Left tilted	0.543	0.527	0.577	0.210	1.070	1.330
	Right cheek	0.937	0.295	0.286	0.088	1.232	1.311
	Right tilted	0.790	0.312	0.325	0.082	1.102	1.197
CA_12A-30A	Left cheek	0.323	0.639	0.483	0.257	0.962	1.063
	Left tilted	0.294	0.527	0.577	0.210	0.821	1.081
	Right cheek	0.664	0.295	0.286	0.088	0.959	1.038
	Right tilted	0.657	0.312	0.325	0.082	0.969	1.064
CA_12A-66A	Left cheek	0.477	0.639	0.483	0.257	1.116	1.217
	Left tilted	0.463	0.527	0.577	0.210	0.990	1.250
	Right cheek	0.760	0.295	0.286	0.088	1.055	1.134
	Right tilted	0.655	0.312	0.325	0.082	0.967	1.062
CA_14A-30A	Left cheek	0.386	0.639	0.483	0.257	1.025	1.126
	Left tilted	0.315	0.527	0.577	0.210	0.842	1.102
	Right cheek	0.714	0.295	0.286	0.088	1.009	1.088
	Right tilted	0.739	0.312	0.325	0.082	1.051	1.146
CA_14A-66A	Left cheek	0.540	0.639	0.483	0.257	1.179	1.280
	Left tilted	0.484	0.527	0.577	0.210	1.011	1.271
	Right cheek	0.810	0.295	0.286	0.088	1.105	1.184
	Right tilted	0.737	0.312	0.325	0.082	1.049	1.144

Test position		SARmax (W/kg)				Summed SAR	
		EN-DC Max SAR	WiFi 2.4G Ant6(chain0)	WiFi 5G Ant6(chain0)	BT		
		1	2	3	4	1+2	1+3+4
DC_2A_n2A	Left cheek	0.602	0.639	0.483	0.257	1.241	1.342
	Left tilted	0.565	0.527	0.577	0.210	1.092	1.352
	Right cheek	0.829	0.295	0.286	0.088	1.124	1.203
	Right tilted	0.798	0.312	0.325	0.082	1.110	1.205
DC_2A_n30A	Left cheek	0.513	0.639	0.483	0.257	1.152	1.253
	Left tilted	0.503	0.527	0.577	0.210	1.030	1.290
	Right cheek	0.809	0.295	0.286	0.088	1.104	1.183
	Right tilted	0.736	0.312	0.325	0.082	1.048	1.143
DC_2A_n66A	Left cheek	0.633	0.639	0.483	0.257	1.272	1.373
	Left tilted	0.605	0.527	0.577	0.210	1.132	1.392
	Right cheek	0.814	0.295	0.286	0.088	1.109	1.188
	Right tilted	0.796	0.312	0.325	0.082	1.108	1.203
DC_2A_n77A	Left cheek	0.438	0.639	0.483	0.257	1.077	1.178
	Left tilted	0.305	0.527	0.577	0.210	0.832	1.092
	Right cheek	0.851	0.295	0.286	0.088	1.146	1.225
	Right tilted	0.548	0.312	0.325	0.082	0.860	0.955
DC_2A_n5A	Left cheek	0.594	0.639	0.483	0.257	1.233	1.334
	Left tilted	0.511	0.527	0.577	0.210	1.038	1.298
	Right cheek	0.917	0.295	0.286	0.088	1.212	1.291
	Right tilted	0.846	0.312	0.325	0.082	1.158	1.253
DC_5A_n2A	Left cheek	0.621	0.639	0.483	0.257	1.260	1.361
	Left tilted	0.541	0.527	0.577	0.210	1.068	1.328
	Right cheek	0.948	0.295	0.286	0.088	1.243	1.322
	Right tilted	0.811	0.312	0.325	0.082	1.123	1.218
DC_5A_n30A	Left cheek	0.532	0.639	0.483	0.257	1.171	1.272
	Left tilted	0.479	0.527	0.577	0.210	1.006	1.266



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032311

Rev.: 01

Page: 107 of 123

	Right cheek	0.928	0.295	0.286	0.088	1.223	1.302
	Right tilted	0.749	0.312	0.325	0.082	1.061	1.156
DC_5A_n66A	Left cheek	0.652	0.639	0.483	0.257	1.291	1.392
	Left tilted	0.581	0.527	0.577	0.210	1.108	1.368
	Right cheek	0.933	0.295	0.286	0.088	1.228	1.307
	Right tilted	0.809	0.312	0.325	0.082	1.121	1.216
DC_5A_n77A	Left cheek	0.457	0.639	0.483	0.257	1.096	1.197
	Left tilted	0.281	0.527	0.577	0.210	0.808	1.068
	Right cheek	0.970	0.295	0.286	0.088	1.265	1.344
	Right tilted	0.561	0.312	0.325	0.082	0.873	0.968
DC_12A_n2A	Left cheek	0.478	0.639	0.483	0.257	1.117	1.218
	Left tilted	0.461	0.527	0.577	0.210	0.988	1.248
	Right cheek	0.771	0.295	0.286	0.088	1.066	1.145
	Right tilted	0.676	0.312	0.325	0.082	0.988	1.083
DC_12A_n30A	Left cheek	0.389	0.639	0.483	0.257	1.028	1.129
	Left tilted	0.399	0.527	0.577	0.210	0.926	1.186
	Right cheek	0.751	0.295	0.286	0.088	1.046	1.125
	Right tilted	0.614	0.312	0.325	0.082	0.926	1.021
DC_12A_n66A	Left cheek	0.509	0.639	0.483	0.257	1.148	1.249
	Left tilted	0.501	0.527	0.577	0.210	1.028	1.288
	Right cheek	0.756	0.295	0.286	0.088	1.051	1.130
	Right tilted	0.674	0.312	0.325	0.082	0.986	1.081
DC_12A_n77A	Left cheek	0.314	0.639	0.483	0.257	0.953	1.054
	Left tilted	0.201	0.527	0.577	0.210	0.728	0.988
	Right cheek	0.793	0.295	0.286	0.088	1.088	1.167
	Right tilted	0.426	0.312	0.325	0.082	0.738	0.833
DC_14A_n2A	Left cheek	0.541	0.639	0.483	0.257	1.180	1.281
	Left tilted	0.482	0.527	0.577	0.210	1.009	1.269
	Right cheek	0.821	0.295	0.286	0.088	1.116	1.195
	Right tilted	0.758	0.312	0.325	0.082	1.070	1.165
DC_14A_n30A	Left cheek	0.452	0.639	0.483	0.257	1.091	1.192
	Left tilted	0.420	0.527	0.577	0.210	0.947	1.207
	Right cheek	0.801	0.295	0.286	0.088	1.096	1.175
	Right tilted	0.696	0.312	0.325	0.082	1.008	1.103
DC_14A_n66A	Left cheek	0.572	0.639	0.483	0.257	1.211	1.312
	Left tilted	0.522	0.527	0.577	0.210	1.049	1.309
	Right cheek	0.806	0.295	0.286	0.088	1.101	1.180
	Right tilted	0.756	0.312	0.325	0.082	1.068	1.163
DC_14A_n77A	Left cheek	0.377	0.639	0.483	0.257	1.016	1.117
	Left tilted	0.222	0.527	0.577	0.210	0.749	1.009
	Right cheek	0.843	0.295	0.286	0.088	1.138	1.217
	Right tilted	0.508	0.312	0.325	0.082	0.820	0.915
DC_30A_n77A	Left cheek	0.394	0.639	0.483	0.257	1.033	1.134
	Left tilted	0.334	0.527	0.577	0.210	0.861	1.121
	Right cheek	0.818	0.295	0.286	0.088	1.113	1.192
	Right tilted	0.516	0.312	0.325	0.082	0.828	0.923
DC_30A_n2A	Left cheek	0.441	0.639	0.483	0.257	1.080	1.181
	Left tilted	0.531	0.527	0.577	0.210	1.058	1.318
	Right cheek	1.033	0.295	0.286	0.088	1.328	1.407



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032311

Rev.: 01

Page: 108 of 123

	Right tilted	1.151	0.312	0.325	0.082	1.463	1.558
DC_30A_n5A	Left cheek	0.468	0.639	0.483	0.257	1.107	1.208
	Left tilted	0.370	0.527	0.577	0.210	0.897	1.157
	Right cheek	0.832	0.295	0.286	0.088	1.127	1.206
	Right tilted	0.807	0.312	0.325	0.082	1.119	1.214
DC_30A_n66A	Left cheek	0.472	0.639	0.483	0.257	1.111	1.212
	Left tilted	0.571	0.527	0.577	0.210	1.098	1.358
	Right cheek	1.018	0.295	0.286	0.088	1.313	1.392
	Right tilted	1.149	0.312	0.325	0.082	1.461	1.556
DC_66A_n30A	Left cheek	0.536	0.639	0.483	0.257	1.175	1.276
	Left tilted	0.493	0.527	0.577	0.210	1.020	1.280
	Right cheek	0.799	0.295	0.286	0.088	1.094	1.173
	Right tilted	0.709	0.312	0.325	0.082	1.021	1.116
DC_66A_n66A	Left cheek	0.656	0.639	0.483	0.257	1.295	1.396
	Left tilted	0.595	0.527	0.577	0.210	1.122	1.382
	Right cheek	0.804	0.295	0.286	0.088	1.099	1.178
	Right tilted	0.769	0.312	0.325	0.082	1.081	1.176
DC_66A_n77A	Left cheek	0.461	0.639	0.483	0.257	1.100	1.201
	Left tilted	0.295	0.527	0.577	0.210	0.822	1.082
	Right cheek	0.841	0.295	0.286	0.088	1.136	1.215
	Right tilted	0.521	0.312	0.325	0.082	0.833	0.928
DC_66A_n5A	Left cheek	0.622	0.639	0.483	0.257	1.261	1.362
	Left tilted	0.539	0.527	0.577	0.210	1.066	1.326
	Right cheek	0.928	0.295	0.286	0.088	1.223	1.302
	Right tilted	0.805	0.312	0.325	0.082	1.117	1.212



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032311

Rev.: 01

Page: 109 of 123

Simultaneous Transmission SAR Summation Scenario for WLAN Body: Body-worn:

Test position		SARmax (W/kg)				Summed SAR	
		Main Ant0	WiFi 2.4G Ant5(chain0)	WiFi 5G Ant5(chain0)	BT		
		1	2	3	4	1+2	1+3+4
WCDMA V	Front side	0.336	0.141	0.180	0.012	0.477	0.528
	Back side	0.383	0.180	0.304	0.022	0.563	0.709
LTE Band 5	Front side	0.369	0.141	0.180	0.012	0.510	0.561
	Back side	0.414	0.180	0.304	0.022	0.594	0.740
LTE Band 12(17)	Front side	0.317	0.141	0.180	0.012	0.458	0.509
	Back side	0.412	0.180	0.304	0.022	0.592	0.738
LTE Band 14	Front side	0.328	0.141	0.180	0.012	0.469	0.520
	Back side	0.388	0.180	0.304	0.022	0.568	0.714
5G NR n5	Front side	0.372	0.141	0.180	0.012	0.513	0.564
	Back side	0.434	0.180	0.304	0.022	0.614	0.760

Test position		SARmax (W/kg)				Summed SAR	
		Main Ant3	WiFi 2.4G Ant5	WiFi 5G Ant5	BT		
		1	2	3	4	1+2	1+3+4
WCDMA II	Front side	0.506	0.141	0.180	0.012	0.647	0.698
	Back side	0.729	0.180	0.304	0.022	0.909	1.055
WCDMA IV	Front side	0.437	0.141	0.180	0.012	0.578	0.629
	Back side	0.657	0.180	0.304	0.022	0.837	0.983
LTE Band 2	Front side	0.506	0.141	0.180	0.012	0.647	0.698
	Back side	0.729	0.180	0.304	0.022	0.909	1.055
LTE Band 7	Front side	0.230	0.141	0.180	0.012	0.371	0.422
	Back side	0.441	0.180	0.304	0.022	0.621	0.767
LTE Band 30	Front side	0.462	0.141	0.180	0.012	0.603	0.654
	Back side	0.844	0.180	0.304	0.022	1.024	1.170
LTE Band 66(4)	Front side	0.478	0.141	0.180	0.012	0.619	0.670
	Back side	0.718	0.180	0.304	0.022	0.898	1.044
5G NR n2	Front side	0.447	0.141	0.180	0.012	0.588	0.639
	Back side	0.688	0.180	0.304	0.022	0.868	1.014
5G NR n30	Front side	0.453	0.141	0.180	0.012	0.594	0.645
	Back side	0.960	0.180	0.304	0.022	1.140	1.286
5G NR n66	Front side	0.455	0.141	0.180	0.012	0.596	0.647
	Back side	0.650	0.180	0.304	0.022	0.830	0.976

Test position		SARmax (W/kg)				Summed SAR	
		Main Ant4	WiFi 2.4G Ant5	WiFi 5G Ant5	BT		
		1	2	3	4	1+2	1+3+4
5G NR n77	Front side	0.550	0.141	0.180	0.012	0.691	0.742
	Back side	0.646	0.180	0.304	0.022	0.826	0.972



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032311

Rev.: 01

Page: 110 of 123

Test position		SARmax (W/kg)				Summed SAR	
		Inter-band UL CA	WiFi 2.4G Ant5(chain0)	WiFi 5G Ant5(chain0)	BT		
		1	2	3	4	1+2	1+3+4
CA_2A-5A	Front side	0.789	0.141	0.180	0.012	0.930	0.981
	Back side	1.066	0.180	0.304	0.022	1.246	1.392
CA_2A-12A	Front side	0.737	0.141	0.180	0.012	0.878	0.929
	Back side	1.064	0.180	0.304	0.022	1.244	1.390
CA_2A-14A	Front side	0.748	0.141	0.180	0.012	0.889	0.940
	Back side	1.040	0.180	0.304	0.022	1.220	1.366
CA_4A-12A	Front side	0.795	0.141	0.180	0.012	0.936	0.987
	Back side	1.130	0.180	0.304	0.022	1.310	1.456
CA_5A-30A	Front side	0.831	0.141	0.180	0.012	0.972	1.023
	Back side	1.258	0.180	0.304	0.022	1.438	1.584
CA_5A-66A	Front side	0.847	0.141	0.180	0.012	0.988	1.039
	Back side	1.132	0.180	0.304	0.022	1.312	1.458
CA_12A-30A	Front side	0.779	0.141	0.180	0.012	0.920	0.971
	Back side	1.256	0.180	0.304	0.022	1.436	1.582
CA_12A-66A	Front side	0.795	0.141	0.180	0.012	0.936	0.987
	Back side	1.130	0.180	0.304	0.022	1.310	1.456
CA_14A-30A	Front side	0.790	0.141	0.180	0.012	0.931	0.982
	Back side	1.232	0.180	0.304	0.022	1.412	1.558
CA_14A-66A	Front side	0.806	0.141	0.180	0.012	0.947	0.998
	Back side	1.106	0.180	0.304	0.022	1.286	1.432

Test position		SARmax (W/kg)				Summed SAR	
		EN-DC Max SAR	WiFi 2.4G Ant6(chain0)	WiFi 5G Ant6(chain0)	BT		
		1	2	3	4	1+2	1+3+4
DC_2A_n2A	Front side	0.838	0.141	0.180	0.012	0.979	1.030
	Back side	1.221	0.180	0.304	0.022	1.401	1.547
DC_2A_n30A	Front side	0.646	0.141	0.180	0.012	0.787	0.838
	Back side	1.073	0.180	0.304	0.022	1.253	1.399
DC_2A_n66A	Front side	0.846	0.141	0.180	0.012	0.987	1.038
	Back side	1.183	0.180	0.304	0.022	1.363	1.509
DC_2A_n77A	Front side	0.941	0.141	0.180	0.012	1.082	1.133
	Back side	1.179	0.180	0.304	0.022	1.359	1.505
DC_2A_n5A	Front side	0.792	0.141	0.180	0.012	0.933	0.984
	Back side	1.086	0.180	0.304	0.022	1.266	1.412
DC_5A_n2A	Front side	0.816	0.141	0.180	0.012	0.957	1.008
	Back side	1.102	0.180	0.304	0.022	1.282	1.428
DC_5A_n30A	Front side	0.624	0.141	0.180	0.012	0.765	0.816
	Back side	0.954	0.180	0.304	0.022	1.134	1.280
DC_5A_n66A	Front side	0.824	0.141	0.180	0.012	0.965	1.016
	Back side	1.064	0.180	0.304	0.022	1.244	1.390
DC_5A_n77A	Front side	0.919	0.141	0.180	0.012	1.060	1.111
	Back side	1.060	0.180	0.304	0.022	1.240	1.386
DC_12A_n2A	Front side	0.764	0.141	0.180	0.012	0.905	0.956
	Back side	1.100	0.180	0.304	0.022	1.280	1.426
DC_12A_n30A	Front side	0.572	0.141	0.180	0.012	0.713	0.764



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032311

Rev.: 01

Page: 111 of 123

	Back side	0.952	0.180	0.304	0.022	1.132	1.278
DC_12A_n66A	Front side	0.772	0.141	0.180	0.012	0.913	0.964
	Back side	1.062	0.180	0.304	0.022	1.242	1.388
DC_12A_n77A	Front side	0.867	0.141	0.180	0.012	1.008	1.059
	Back side	1.058	0.180	0.304	0.022	1.238	1.384
DC_14A_n2A	Front side	0.775	0.141	0.180	0.012	0.916	0.967
	Back side	1.076	0.180	0.304	0.022	1.256	1.402
DC_14A_n30A	Front side	0.583	0.141	0.180	0.012	0.724	0.775
	Back side	0.928	0.180	0.304	0.022	1.108	1.254
DC_14A_n66A	Front side	0.783	0.141	0.180	0.012	0.924	0.975
	Back side	1.038	0.180	0.304	0.022	1.218	1.364
DC_14A_n77A	Front side	0.878	0.141	0.180	0.012	1.019	1.070
	Back side	1.034	0.180	0.304	0.022	1.214	1.360
DC_30A_n77A	Front side	0.762	0.141	0.180	0.012	0.903	0.954
	Back side	0.952	0.180	0.304	0.022	1.132	1.278
DC_30A_n2A	Front side	0.563	0.141	0.180	0.012	0.704	0.755
	Back side	0.907	0.180	0.304	0.022	1.087	1.233
DC_30A_n5A	Front side	0.488	0.141	0.180	0.012	0.629	0.680
	Back side	0.653	0.180	0.304	0.022	0.833	0.979
DC_30A_n66A	Front side	0.571	0.141	0.180	0.012	0.712	0.763
	Back side	0.869	0.180	0.304	0.022	1.049	1.195
DC_66A_n30A	Front side	0.661	0.141	0.180	0.012	0.802	0.853
	Back side	1.142	0.180	0.304	0.022	1.322	1.468
DC_66A_n66A	Front side	0.861	0.141	0.180	0.012	1.002	1.053
	Back side	1.252	0.180	0.304	0.022	1.432	1.578
DC_66A_n77A	Front side	0.956	0.141	0.180	0.012	1.097	1.148
	Back side	1.248	0.180	0.304	0.022	1.428	1.574
DC_66A_n5A	Front side	0.850	0.141	0.180	0.012	0.991	1.042
	Back side	1.152	0.180	0.304	0.022	1.332	1.478



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032311

Rev.: 01

Page: 112 of 123

Hotspot:

Test position		SARmax (W/kg)				Summed SAR	
		Main Ant0	WiFi 2.4G Ant5	WiFi 5G Ant5	BT		
		1	2	3	4	1+2	1+3+4
WCDMA V	Front side	0.397	0.252	0.159	0.037	0.649	0.593
	Back side	0.420	0.355	0.308	0.051	0.775	0.779
	Left side	0.198	/	/	0.012	0.198	0.210
	Right side	0.322	0.304	0.136	0.016	0.626	0.474
	Top side	/	0.298	0.401	0.039	0.298	0.440
	Bottom side	0.495	/	/	/	0.495	0.495
LTE Band 5	Front side	0.421	0.252	0.159	0.037	0.673	0.617
	Back side	0.457	0.355	0.308	0.051	0.812	0.816
	Left side	/	/	/	0.012	/	0.012
	Right side	0.368	0.304	0.136	0.016	0.672	0.520
	Top side	/	0.298	0.401	0.039	0.298	0.440
	Bottom side	0.553	/	/	/	0.553	0.553
LTE Band 12(17)	Front side	0.277	0.252	0.159	0.037	0.529	0.473
	Back side	0.420	0.355	0.308	0.051	0.775	0.779
	Left side	0.254	/	/	0.012	0.254	0.266
	Right side	0.393	0.304	0.136	0.016	0.697	0.545
	Top side	/	0.298	0.401	0.039	0.298	0.440
	Bottom side	0.211	/	/	/	0.211	0.211
LTE Band 14	Front side	0.315	0.252	0.159	0.037	0.567	0.511
	Back side	0.388	0.355	0.308	0.051	0.743	0.747
	Left side	0.201	/	/	0.012	0.201	0.213
	Right side	0.376	0.304	0.136	0.016	0.680	0.528
	Top side	/	0.298	0.401	0.039	0.298	0.440
	Bottom side	0.360	/	/	/	0.360	0.360
5G NR n5	Front side	0.371	0.252	0.159	0.037	0.623	0.567
	Back side	0.423	0.355	0.308	0.051	0.778	0.782
	Left side	0.194	/	/	0.012	0.194	0.206
	Right side	0.318	0.304	0.136	0.016	0.622	0.470
	Top side	/	0.298	0.401	0.039	0.298	0.440
	Bottom side	0.539	/	/	/	0.539	0.539

Test position		SARmax (W/kg)				Summed SAR	
		Main Ant3	WiFi 2.4G Ant5	WiFi 5G Ant5	BT		
		1	2	3	4	1+2	1+3+4
WCDMA II	Front side	0.451	0.252	0.159	0.037	0.703	0.647
	Back side	0.795	0.355	0.308	0.051	1.150	1.154
	Left side	0.141	/	/	0.012	0.141	0.153
	Right side	/	0.304	0.136	0.016	0.304	0.152
	Top side	0.868	0.298	0.401	0.039	1.166	1.308
	Bottom side	/	/	/	/	/	/
WCDMA IV	Front side	0.563	0.252	0.159	0.037	0.815	0.759
	Back side	1.013	0.355	0.308	0.051	1.368	1.372
	Left side	0.250	/	/	0.012	0.250	0.262
	Right side	/	0.304	0.136	0.016	0.304	0.152
	Top side	0.681	0.298	0.401	0.039	0.979	1.121



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032311

Rev.: 01

Page: 113 of 123

	Bottom side	/	/	/	/	/	/
LTE Band 2	Front side	0.460	0.252	0.159	0.037	0.712	0.656
	Back side	0.749	0.355	0.308	0.051	1.104	1.108
	Left side	0.140	/	/	0.012	0.140	0.152
	Right side	/	0.304	0.136	0.016	0.304	0.152
	Top side	0.823	0.298	0.401	0.039	1.121	1.263
	Bottom side	/	/	/	/	/	/
LTE Band 7	Front side	0.413	0.252	0.159	0.037	0.665	0.609
	Back side	1.039	0.355	0.308	0.051	1.394	1.398
	Left side	0.470	/	/	0.012	0.470	0.482
	Right side	/	0.304	0.136	0.016	0.304	0.152
	Top side	1.152	0.298	0.401	0.039	1.450	1.592
	Bottom side	/	/	/	/	/	/
LTE Band 30	Front side	0.491	0.252	0.159	0.037	0.743	0.687
	Back side	0.816	0.355	0.308	0.051	1.171	1.175
	Left side	0.214	/	/	0.012	0.214	0.226
	Right side	/	0.304	0.136	0.016	0.304	0.152
	Top side	0.765	0.298	0.401	0.039	1.063	1.205
	Bottom side	/	/	/	/	/	/
LTE Band 66(4)	Front side	0.673	0.252	0.159	0.037	0.925	0.869
	Back side	1.190	0.355	0.308	0.051	1.545	1.549
	Left side	0.311	/	/	0.012	0.311	0.323
	Right side	/	0.304	0.136	0.016	0.304	0.152
	Top side	0.925	0.298	0.401	0.039	1.223	1.365
	Bottom side	/	/	/	/	/	/
5G NR n2	Front side	0.489	0.252	0.159	0.037	0.741	0.685
	Back side	0.799	0.355	0.308	0.051	1.154	1.158
	Left side	0.135	/	/	0.012	0.135	0.147
	Right side	/	0.304	0.136	0.016	0.304	0.152
	Top side	0.888	0.298	0.401	0.039	1.186	1.328
	Bottom side	/	/	/	/	/	/
5G NR n30	Front side	0.316	0.252	0.159	0.037	0.568	0.512
	Back side	0.833	0.355	0.308	0.051	1.188	1.192
	Left side	0.205	/	/	0.012	0.205	0.217
	Right side	/	0.304	0.136	0.016	0.304	0.152
	Top side	0.805	0.298	0.401	0.039	1.103	1.245
	Bottom side	/	/	/	/	/	/
5G NR n66	Front side	0.592	0.252	0.159	0.037	0.844	0.788
	Back side	1.035	0.355	0.308	0.051	1.390	1.394
	Left side	0.317	/	/	0.012	0.317	0.329
	Right side	/	0.304	0.136	0.016	0.304	0.152
	Top side	0.817	0.298	0.401	0.039	1.115	1.257
	Bottom side	/	/	/	/	/	/



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032311

Rev.: 01

Page: 114 of 123

Test position		SARmax (W/kg)				Summed SAR	
		Main Ant4	WiFi 2.4G Ant5	WiFi 5G Ant5	BT		
		1	2	3	4	1+2	1+3+4
5G NR n77	Front side	0.626	0.252	0.159	0.037	0.878	0.822
	Back side	0.626	0.355	0.308	0.051	0.981	0.985
	Left side	1.027	/	/	0.012	1.027	1.039
	Right side	/	0.304	0.136	0.016	0.304	0.152
	Top side	0.369	0.298	0.401	0.039	0.667	0.809
	Bottom side	/	/	/	/	/	/

Test position		SARmax (W/kg)				Summed SAR	
		Inter-band UL CA	WiFi 2.4G Ant5	WiFi 5G Ant5	BT		
		1	2	3	4	1+2	1+3+4
CA_2A-5A	Front side	0.881	0.252	0.159	0.037	1.133	1.077
	Back side	1.206	0.355	0.308	0.051	1.561	1.565
	Left side	0.140	/	/	0.012	0.140	0.152
	Right side	0.368	0.304	0.136	0.016	0.672	0.520
	Top side	0.823	0.298	0.401	0.039	1.121	1.263
	Bottom side	0.553	/	/	/	0.553	0.553
CA_2A-12A	Front side	0.737	0.252	0.159	0.037	0.989	0.933
	Back side	1.169	0.355	0.308	0.051	1.524	1.528
	Left side	0.394	/	/	0.012	0.394	0.406
	Right side	0.393	0.304	0.136	0.016	0.697	0.545
	Top side	0.823	0.298	0.401	0.039	1.121	1.263
	Bottom side	0.211	/	/	/	0.211	0.211
CA_2A-14A	Front side	0.775	0.252	0.159	0.037	1.027	0.971
	Back side	1.137	0.355	0.308	0.051	1.492	1.496
	Left side	0.341	/	/	0.012	0.341	0.353
	Right side	0.376	0.304	0.136	0.016	0.680	0.528
	Top side	0.823	0.298	0.401	0.039	1.121	1.263
	Bottom side	0.360	/	/	/	0.360	0.360
CA_4A-12A	Front side	0.597	0.252	0.159	0.037	0.849	0.793
	Back side	0.969	0.355	0.308	0.051	1.324	1.328
	Left side	0.393	/	/	0.012	0.393	0.405
	Right side	0.393	0.304	0.136	0.016	0.697	0.545
	Top side	0.425	0.298	0.401	0.039	0.723	0.865
	Bottom side	0.211	/	/	/	0.211	0.211
CA_5A-30A	Front side	0.697	0.252	0.159	0.037	0.949	0.893
	Back side	0.916	0.355	0.308	0.051	1.271	1.275
	Left side	0.120	/	/	0.012	0.120	0.132
	Right side	0.368	0.304	0.136	0.016	0.672	0.520
	Top side	0.430	0.298	0.401	0.039	0.728	0.870
	Bottom side	0.553	/	/	/	0.553	0.553
CA_5A-66A	Front side	0.741	0.252	0.159	0.037	0.993	0.937
	Back side	1.006	0.355	0.308	0.051	1.361	1.365
	Left side	0.139	/	/	0.012	0.139	0.151
	Right side	0.368	0.304	0.136	0.016	0.672	0.520
	Top side	0.425	0.298	0.401	0.039	0.723	0.865



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032311

Rev.: 01

Page: 115 of 123

	Bottom side	0.553	/	/	/	0.553	0.553
CA_12A-30A	Front side	0.553	0.252	0.159	0.037	0.805	0.749
	Back side	0.879	0.355	0.308	0.051	1.234	1.238
	Left side	0.374	/	/	0.012	0.374	0.386
	Right side	0.393	0.304	0.136	0.016	0.697	0.545
	Top side	0.430	0.298	0.401	0.039	0.728	0.870
	Bottom side	0.211	/	/	/	0.211	0.211
CA_12A-66A	Front side	0.597	0.252	0.159	0.037	0.849	0.793
	Back side	0.969	0.355	0.308	0.051	1.324	1.328
	Left side	0.393	/	/	0.012	0.393	0.405
	Right side	0.393	0.304	0.136	0.016	0.697	0.545
	Top side	0.425	0.298	0.401	0.039	0.723	0.865
	Bottom side	0.211	/	/	/	0.211	0.211
CA_14A-30A	Front side	0.591	0.252	0.159	0.037	0.843	0.787
	Back side	0.847	0.355	0.308	0.051	1.202	1.206
	Left side	0.321	/	/	0.012	0.321	0.333
	Right side	0.376	0.304	0.136	0.016	0.680	0.528
	Top side	0.430	0.298	0.401	0.039	0.728	0.870
	Bottom side	0.360	/	/	/	0.360	0.360
CA_14A-66A	Front side	0.635	0.252	0.159	0.037	0.887	0.831
	Back side	0.937	0.355	0.308	0.051	1.292	1.296
	Left side	0.340	/	/	0.012	0.340	0.352
	Right side	0.376	0.304	0.136	0.016	0.680	0.528
	Top side	0.425	0.298	0.401	0.039	0.723	0.865
	Bottom side	0.360	/	/	/	0.360	0.360

Test position		SARmax (W/kg)				Summed SAR	
		EN-DC Max SAR	WiFi 2.4G Ant5	WiFi 5G Ant5	BT		
		1	2	3	4	1+2	1+3+4
DC_2A_n2A	Front side	0.610	0.252	0.159	0.037	0.862	0.806
	Back side	0.987	0.355	0.308	0.051	1.342	1.346
	Left side	0.484	/	/	0.012	0.484	0.496
	Right side	/	0.304	0.136	0.016	0.304	0.152
	Top side	0.499	0.298	0.401	0.039	0.797	0.939
	Bottom side	0.357	/	/	/	0.357	0.357
DC_2A_n30A	Front side	0.611	0.252	0.159	0.037	0.863	0.807
	Back side	0.996	0.355	0.308	0.051	1.351	1.355
	Left side	0.528	/	/	0.012	0.528	0.540
	Right side	/	0.304	0.136	0.016	0.304	0.152
	Top side	0.430	0.298	0.401	0.039	0.728	0.870
	Bottom side	0.357	/	/	/	0.357	0.357
DC_2A_n66A	Front side	0.655	0.252	0.159	0.037	0.907	0.851
	Back side	1.086	0.355	0.308	0.051	1.441	1.445
	Left side	0.547	/	/	0.012	0.547	0.559
	Right side	/	0.304	0.136	0.016	0.304	0.152
	Top side	0.425	0.298	0.401	0.039	0.723	0.865
	Bottom side	0.357	/	/	/	0.357	0.357
DC_2A_n77A	Front side	0.649	0.252	0.159	0.037	0.901	0.845
	Back side	0.980	0.355	0.308	0.051	1.335	1.339



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032311

Rev.: 01

Page: 116 of 123

	Left side	0.950	/	/	0.012	0.950	0.962
	Right side	/	0.304	0.136	0.016	0.304	0.152
	Top side	0.156	0.298	0.401	0.039	0.454	0.596
	Bottom side	0.357	/	/	/	0.357	0.357
DC_2A_n5A	Front side	0.831	0.252	0.159	0.037	1.083	1.027
	Back side	1.172	0.355	0.308	0.051	1.527	1.531
	Left side	0.334	/	/	0.012	0.334	0.346
	Right side	0.318	0.304	0.136	0.016	0.622	0.470
	Top side	0.823	0.298	0.401	0.039	1.121	1.263
	Bottom side	0.539	/	/	/	0.539	0.539
DC_5A_n2A	Front side	0.696	0.252	0.159	0.037	0.948	0.892
	Back side	0.907	0.355	0.308	0.051	1.262	1.266
	Left side	0.076	/	/	0.012	0.076	0.088
	Right side	0.368	0.304	0.136	0.016	0.672	0.520
	Top side	0.499	0.298	0.401	0.039	0.797	0.939
	Bottom side	0.553	/	/	/	0.553	0.553
DC_5A_n30A	Front side	0.697	0.252	0.159	0.037	0.949	0.893
	Back side	0.916	0.355	0.308	0.051	1.271	1.275
	Left side	0.120	/	/	0.012	0.120	0.132
	Right side	0.368	0.304	0.136	0.016	0.672	0.520
	Top side	0.430	0.298	0.401	0.039	0.728	0.870
	Bottom side	0.553	/	/	/	0.553	0.553
DC_5A_n66A	Front side	0.741	0.252	0.159	0.037	0.993	0.937
	Back side	1.006	0.355	0.308	0.051	1.361	1.365
	Left side	0.139	/	/	0.012	0.139	0.151
	Right side	0.368	0.304	0.136	0.016	0.672	0.520
	Top side	0.425	0.298	0.401	0.039	0.723	0.865
	Bottom side	0.553	/	/	/	0.553	0.553
DC_5A_n77A	Front side	0.735	0.252	0.159	0.037	0.987	0.931
	Back side	0.900	0.355	0.308	0.051	1.255	1.259
	Left side	0.542	/	/	0.012	0.542	0.554
	Right side	0.368	0.304	0.136	0.016	0.672	0.520
	Top side	0.156	0.298	0.401	0.039	0.454	0.596
	Bottom side	0.553	/	/	/	0.553	0.553
DC_12A_n2A	Front side	0.552	0.252	0.159	0.037	0.804	0.748
	Back side	0.870	0.355	0.308	0.051	1.225	1.229
	Left side	0.330	/	/	0.012	0.330	0.342
	Right side	0.393	0.304	0.136	0.016	0.697	0.545
	Top side	0.499	0.298	0.401	0.039	0.797	0.939
	Bottom side	0.211	/	/	/	0.211	0.211
DC_12A_n30A	Front side	0.553	0.252	0.159	0.037	0.805	0.749
	Back side	0.879	0.355	0.308	0.051	1.234	1.238
	Left side	0.374	/	/	0.012	0.374	0.386
	Right side	0.393	0.304	0.136	0.016	0.697	0.545
	Top side	0.430	0.298	0.401	0.039	0.728	0.870
	Bottom side	0.211	/	/	/	0.211	0.211
DC_12A_n66A	Front side	0.597	0.252	0.159	0.037	0.849	0.793
	Back side	0.969	0.355	0.308	0.051	1.324	1.328
	Left side	0.393	/	/	0.012	0.393	0.405



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032311

Rev.: 01

Page: 117 of 123

	Right side	0.393	0.304	0.136	0.016	0.697	0.545
	Top side	0.425	0.298	0.401	0.039	0.723	0.865
	Bottom side	0.211	/	/	/	0.211	0.211
DC_12A_n77A	Front side	0.591	0.252	0.159	0.037	0.843	0.787
	Back side	0.863	0.355	0.308	0.051	1.218	1.222
	Left side	0.796	/	/	0.012	0.796	0.808
	Right side	0.393	0.304	0.136	0.016	0.697	0.545
	Top side	0.156	0.298	0.401	0.039	0.454	0.596
	Bottom side	0.211	/	/	/	0.211	0.211
DC_14A_n2A	Front side	0.590	0.252	0.159	0.037	0.842	0.786
	Back side	0.838	0.355	0.308	0.051	1.193	1.197
	Left side	0.277	/	/	0.012	0.277	0.289
	Right side	0.376	0.304	0.136	0.016	0.680	0.528
	Top side	0.499	0.298	0.401	0.039	0.797	0.939
	Bottom side	0.360	/	/	/	0.360	0.360
DC_14A_n30A	Front side	0.591	0.252	0.159	0.037	0.843	0.787
	Back side	0.847	0.355	0.308	0.051	1.202	1.206
	Left side	0.321	/	/	0.012	0.321	0.333
	Right side	0.376	0.304	0.136	0.016	0.680	0.528
	Top side	0.430	0.298	0.401	0.039	0.728	0.870
	Bottom side	0.360	/	/	/	0.360	0.360
DC_14A_n66A	Front side	0.635	0.252	0.159	0.037	0.887	0.831
	Back side	0.937	0.355	0.308	0.051	1.292	1.296
	Left side	0.340	/	/	0.012	0.340	0.352
	Right side	0.376	0.304	0.136	0.016	0.680	0.528
	Top side	0.425	0.298	0.401	0.039	0.723	0.865
	Bottom side	0.360	/	/	/	0.360	0.360
DC_14A_n77A	Front side	0.629	0.252	0.159	0.037	0.881	0.825
	Back side	0.831	0.355	0.308	0.051	1.186	1.190
	Left side	0.743	/	/	0.012	0.743	0.755
	Right side	0.376	0.304	0.136	0.016	0.680	0.528
	Top side	0.156	0.298	0.401	0.039	0.454	0.596
	Bottom side	0.360	/	/	/	0.360	0.360
DC_30A_n77A	Front side	0.706	0.252	0.159	0.037	0.958	0.902
	Back side	1.100	0.355	0.308	0.051	1.455	1.459
	Left side	1.015	/	/	0.012	1.015	1.027
	Right side	/	0.304	0.136	0.016	0.304	0.152
	Top side	0.156	0.298	0.401	0.039	0.454	0.596
	Bottom side	0.237	/	/	/	0.237	0.237
DC_30A_n2A	Front side	0.551	0.252	0.159	0.037	0.803	0.747
	Back side	0.909	0.355	0.308	0.051	1.264	1.268
	Left side	0.196	/	/	0.012	0.196	0.208
	Right side	/	0.304	0.136	0.016	0.304	0.152
	Top side	0.929	0.298	0.401	0.039	1.227	1.369
	Bottom side	/	/	/	/	/	/
DC_30A_n5A	Front side	0.647	0.252	0.159	0.037	0.899	0.843
	Back side	0.882	0.355	0.308	0.051	1.237	1.241
	Left side	0.314	/	/	0.012	0.314	0.326
	Right side	0.318	0.304	0.136	0.016	0.622	0.470



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032311

Rev.: 01

Page: 118 of 123

	Top side	0.430	0.298	0.401	0.039	0.728	0.870
	Bottom side	0.539	/	/	/	0.539	0.539
DC_30A_n66A	Front side	0.596	0.252	0.159	0.037	0.848	0.792
	Back side	1.008	0.355	0.308	0.051	1.363	1.367
	Left side	0.259	/	/	0.012	0.259	0.271
	Right side	/	0.304	0.136	0.016	0.304	0.152
	Top side	0.855	0.298	0.401	0.039	1.153	1.295
	Bottom side	/	/	/	/	/	/
DC_66A_n30A	Front side	0.593	0.252	0.159	0.037	0.845	0.789
	Back side	0.944	0.355	0.308	0.051	1.299	1.303
	Left side	0.515	/	/	0.012	0.515	0.527
	Right side	/	0.304	0.136	0.016	0.304	0.152
	Top side	0.430	0.298	0.401	0.039	0.728	0.870
	Bottom side	0.367	/	/	/	0.367	0.367
DC_66A_n66A	Front side	0.637	0.252	0.159	0.037	0.889	0.833
	Back side	1.034	0.355	0.308	0.051	1.389	1.393
	Left side	0.534	/	/	0.012	0.534	0.546
	Right side	/	0.304	0.136	0.016	0.304	0.152
	Top side	0.425	0.298	0.401	0.039	0.723	0.865
	Bottom side	0.367	/	/	/	0.367	0.367
DC_66A_n77A	Front side	0.631	0.252	0.159	0.037	0.883	0.827
	Back side	0.928	0.355	0.308	0.051	1.283	1.287
	Left side	0.937	/	/	0.012	0.937	0.949
	Right side	/	0.304	0.136	0.016	0.304	0.152
	Top side	0.156	0.298	0.401	0.039	0.454	0.596
	Bottom side	0.367	/	/	/	0.367	0.367
DC_66A_n5A	Front side	0.691	0.252	0.159	0.037	0.943	0.887
	Back side	0.972	0.355	0.308	0.051	1.327	1.331
	Left side	0.333	/	/	0.012	0.333	0.345
	Right side	0.318	0.304	0.136	0.016	0.622	0.470
	Top side	0.425	0.298	0.401	0.039	0.723	0.865
	Bottom side	0.539	/	/	/	0.539	0.539



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032311

Rev.: 01

Page: 119 of 123

Product specific 10g SAR:

Test position		SARmax (W/kg)			Summed SAR
		Main Ant3	WiFi 5G Ant5	NFC	
		1	2	3	1+2+3
WCDMA II	Front side	/	0.378	/	0.378
	Back side	2.466	0.313	0.016	2.795
	Left side	/	/	/	/
	Right side	/	0.16	/	0.16
	Top side	3.157	0.689	/	3.846
	Bottom side	/	/	/	/
WCDMA IV	Front side	/	0.378	/	0.378
	Back side	3.147	0.313	0.016	3.476
	Left side	/	/	/	/
	Right side	/	0.16	/	0.16
	Top side	/	0.689	/	0.689
	Bottom side	/	/	/	/
LTE Band 2	Front side	/	0.378	/	0.378
	Back side	/	0.313	0.016	0.329
	Left side	/	/	/	/
	Right side	/	0.16	/	0.16
	Top side	2.897	0.689	/	3.586
	Bottom side	/	/	/	/
LTE Band 30	Front side	/	0.378	/	0.378
	Back side	2.938	0.313	0.016	3.267
	Left side	/	/	/	/
	Right side	/	0.16	/	0.16
	Top side	2.974	0.689	/	3.663
	Bottom side	/	/	/	/
LTE Band 66	Front side		0.378	/	0.378
	Back side		0.313	0.016	0.329
	Left side		/	/	/
	Right side		0.16	/	0.16
	Top side		0.689	/	0.689
	Bottom side		/	/	/
5G NR n2	Front side	/	0.378	/	0.378
	Back side	/	0.313	0.016	0.329
	Left side	/	/	/	/
	Right side	/	0.16	/	0.16
	Top side	2.999	0.689	/	3.688
	Bottom side	/	/	/	/
5G NR n30	Front side	/	0.378	/	0.378
	Back side	2.854	0.313	0.016	3.183
	Left side	/	/	/	/
	Right side	/	0.16	/	0.16
	Top side	2.889	0.689	/	3.578
	Bottom side	/	/	/	/
5G NR n66	Front side	/	0.378	/	0.378
	Back side	3.159	0.313	0.016	3.488
	Left side	/	/	/	/



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032311

Rev.: 01

Page: 120 of 123

	Right side	/	0.16	/	0.16
	Top side	/	0.689	/	0.689
	Bottom side	/	/	/	/

Test position		SARmax (W/kg)			Summed SAR
		Main Ant4	WiFi 5G Ant5	NFC	
		1	2	3	
5G NR n77	Front side	/	0.378	/	0.378
	Back side	1.944	0.313	0.016	2.273
	Left side	3.076	/	/	3.076
	Right side	/	0.160	/	0.16
	Top side	/	0.689	/	0.689
	Bottom side	/	/	/	/

Test position		SARmax (W/kg)			Summed SAR
		EN-DC Max SAR	WiFi 5G Ant6(chain0)	NFC	
		1	2	3	
DC_30A_n2A	Front side	/	0.378	/	0.378
	Back side	1.472	0.313	0.016	1.801
	Left side	/	/	/	/
	Right side	/	0.160	/	0.160
	Top side	2.994	0.689	/	3.683
	Bottom side	/	/	/	/



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032311

Rev.: 01

Page: 121 of 123

9 Equipment list

Test Platform		SPEAG DASY8 Professional				
Description		SAR Test System				
Software Reference		cDASY8 V16.4.0.5005				
Hardware Reference						
Equipment		Manufacturer	Model	Serial Number	Calibration Date	Due date of calibration
☒	Twin Phantom	SPEAG	ELI V8.0	2217	NCR	NCR
☒	Twin Phantom	SPEAG	Twin-SAM V8.0	2155	NCR	NCR
☒	DAE	SPEAG	DAE4ip	1826	2025-02-17	2026-02-16
☒	E-Field Probe	SPEAG	EX3DV4	7767	2024-12-31	2025-12-30
☒	E-Field Probe	SPEAG	EX3DV4	7735	2025-01-29	2026-01-28
☒	Validation Kits	SPEAG	CLA13	1032	2023-02-09	2026-02-08
☒	Validation Kits	SPEAG	D750V3	1214	2025-04-01	2028-03-31
☒	Validation Kits	SPEAG	D835V2	4d161	2023-08-25	2026-08-24
☒	Validation Kits	SPEAG	D1750V2	1105	2023-11-03	2026-11-02
☒	Validation Kits	SPEAG	D1950V3	1218	2023-05-04	2026-05-03
☒	Validation Kits	SPEAG	D2300V2	1096	2025-04-01	2028-03-31
☒	Validation Kits	SPEAG	D2450V2	922	2023-08-28	2026-08-27
☒	Validation Kits	SPEAG	D2600V2	1158	2025-03-31	2028-03-30
☒	Validation Kits	SPEAG	D3500V2	1133	2025-04-02	2028-04-01
☒	Validation Kits	SPEAG	D3900V2	1083	2025-03-31	2028-03-30
☒	Validation Kits	SPEAG	D5GHzV2	1174	2023-08-23	2026-08-22
☒	Dielectric parameter probes	SPEAG	DAKS-3.5	1120	2024-08-20	2025-08-19
☒	Vector Network Analyzer and Vector Reflectometer	SPEAG	DAKS_VNA R140	50920	2024-08-19	2025-08-18
☒	Dielectric parameter probes	SPEAG	DAKS-12	1043	2024-08-20	2025-08-19
☒	Vector Network Analyzer and Vector Reflectometer	SPEAG	DAKS_VNA R60	21423005	2024-08-20	2025-08-19
☒	Universal Radio Communication Tester	R&S	CMW500	111637	2024-09-16	2025-09-15
☒	RF Bi-Directional Coupler	Agilent	86205-60001	MY31400031	NCR	NCR
☒	Signal Generator	R&S	SMB100A	182393	2025-02-05	2026-02-04
☒	Preamplifier	Qiji	YX28980933	202104001	NCR	NCR
☒	USB Average Power Sensor	Keysight	U2002H	MY5639004	2024-09-10	2025-09-09
☒	USB Average Power Sensor	Agilent	U2002H	MY48200110	2024-11-21	2025-11-20
☒	Average Power Sensor	R&S	NRP6A	103953	2024-11-20	2025-11-19
☒	Average Power Sensor	R&S	NRP6A	103954	2024-11-20	2025-11-19
☒	Attenuator	SHX	TS2-3dB	30704	NCR	NCR
☒	Coaxial low pass filter	Mini-Circuits	VLF-2500(+)	NA	NCR	NCR
☒	Coaxial low pass filter	Microlab Fxr	LA-F13	NA	NCR	NCR



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032311
Rev.: 01
Page: 122 of 123

☒	DC POWER SUPPLY	SAKO	SK1730SL5A	NA	NCR	NCR
☒	Speed reading thermometer	LKM	DTM3000	NA	2024-09-16	2025-09-15
☒	Humidity and Temperature Indicator	MingGao	MingGao	NA	2024-09-16	2025-09-15

Note: All the equipments are within the valid period when the tests are performed.



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032311
Rev.: 01
Page: 123 of 123

10 Calibration certificate

Please see the Appendix C

11 Photographs

Please see the Appendix D

Appendix A: Detailed System Check Results

Appendix B: Detailed Test Results

Appendix C: Calibration certificate

Appendix D: Photographs

Appendix E: Conducted RF Output Power

---END---
