



FCC TEST REPORT

FCC ID:2A2A8JCDN18000

Product	:	Integrated machine
Model Name	:	JC-DN180-00
Brand	:	N/A
Report No.	:	PTC20090703102E-FC02
Prepared for		
FUJIAN SECURE MEDICAL TECHNOLOGY CO.,LTD		
BUILDING 8#,E DISTRICT, FUZHOU SOFTWARE PARK, FUZHOU 350003, CHINA		
Prepared by		
Precise Testing & Certification Co., Ltd.		
Building 1, No. 6, Tongxin Road, Dongcheng Street, Dongguan, Guangdong, China.		



1 TEST RESULT CERTIFICATION

Applicant's name : FUJIAN SECURE MEDICAL TECHNOLOGY CO.,LTD

Address : BUILDING 8#,E DISTRICT, FUZHOU SOFTWARE PARK, FUZHOU 350003, CHINA

Manufacturer's name : FUJIAN SECURE MEDICAL TECHNOLOGY CO.,LTD

Address : BUILDING 8#,E DISTRICT, FUZHOU SOFTWARE PARK, FUZHOU 350003, CHINA

Product name : Integrated machine

Model name : JC-DN180-00

Standards : FCC Part15 Subpart E , Paragraph 15.407

Test procedure : ANSI C63.10: 2013,
KDB 789033 D02 General UNII Test Procedures New Rules v02r01
KDB662911 D01 Multiple Transmitter Output v02r01

Test Date : Mar 01, 2021 to Apr 20, 2021

Date of Issue : Apr 20, 2021

Test Result : Pass

This device described above has been tested by PTC, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of PTC, this document may be altered or revised by PTC, personal only, and shall be noted in the revision of the document.

Test Engineer:

A handwritten signature in black ink that reads 'Leo Yang' with a long, sweeping horizontal stroke at the end.

Leo Yang / Engineer

Technical Manager:

A handwritten signature in black ink that appears to read 'Chris Du' in a stylized, cursive script.

Chris Du / Manager



Contents

	Page
1 TEST RESULT CERTIFICATION.....	2
2 TEST SUMMARY.....	5
3 GENERAL INFORMATION.....	6
3.1 DESCRIPTION OF TEST MODES.....	7
4 GENERAL INFORMATION.....	8
4.1 GENERAL DESCRIPTION OF E.U.T.....	8
4.2 CHANNEL LIST.....	9
4.3 TEST SITE.....	9
5 EQUIPMENT DURING TEST.....	10
5.1 EQUIPMENTS LIST.....	10
5.2 MEASUREMENT UNCERTAINTY.....	11
5.3 DESCRIPTION OF SUPPORT UNITS.....	11
6 CONDUCTED EMISSION TEST.....	12
6.1 TEST STANDARD AND LIMIT.....	12
6.2 TEST SETUP.....	12
6.3 TEST PROCEDURE.....	12
7 . RADIATION SPURIOUS EMISSION AND BAND EDGE.....	15
7.1 TEST STANDARD AND LIMIT.....	15
7.2 TEST SETUP.....	16
7.3 TEST PROCEDURE.....	17
7.4 TEST DATA.....	18
8 MAXIMUM PEAK OUTPUT POWER TEST.....	41
8.1 TEST STANDARD AND LIMIT.....	41
8.2 TEST SETUP.....	41
8.3 TEST PROCEDURE.....	41
8.4 TEST DATA.....	42
9 OCCUPY BANDWIDTH TEST.....	45



9.1 TEST STANDARD.....	45
9.2 TEST SETUP.....	45
9.3 TEST PROCEDURE.....	45
9.4 TEST DATA.....	46
10 POWER SPECTRAL DENSITY TEST.....	78
10.1 TEST STANDARD AND LIMIT.....	78
10.2 TEST SETUP.....	78
10.3 TEST PROCEDURE.....	78
10.4 TEST DATA.....	79
11 ANTENNA REQUIREMENT.....	96
11.1 TEST STANDARD AND REQUIREMENT.....	96
11.2 ANTENNA CONNECTED CONSTRUCTION.....	97
APPENDIX I -- TEST SETUP PHOTOGRAPH.....	99



2 Test Summary

Standard	Test Type	Result
15.207 & 15.407	Conducted Emission	PASS
15.205/15.209/15.407(b)(4)	Spurious Emission	PASS
15.407(b)	Band Edge	PASS
15.407(a)(5)	Occupy Bandwidth	PASS
15.407(e)	-6db Bandwidth	PASS
15.407(a)(3)	Maximum Conducted Output Power	PASS
15.407(a)(1)(3)	Peak Power Spectral Density	PASS
15.203	Antenna Requirement	PASS



3 General Information

Antenna Information

Ant No	Brand	Model	AntennaType	Connector	Gain(dbi)
A	-	-	columnar antenna	-	6
B	-	-	columnar antenna	-	6

Note:

1. The EUT has Two antennas, which can support IEEE802.11A/N20/N40/AC20/AC40/AC80, and can support IEEE802.11N20/N40/AC20/AC40/AC80 with the MIMO function
2. According to ANSI C63.10:2013 14.4.3.2.5 a):
Directional gain=6dbi+10xlog(2/1)db=9.01dBi>6dBi

3.1 Description of Test Modes

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Mode	Test channel	Frequency (MHz)
OFDM(802.11a/n20/ac20)	CH 149	5745MHz
	CH 157	5785MHz
	CH 165	5825MHz
OFDM(802.11n40/ac40)	CH 151	5755MHz
	CH 159	5795MHz
OFDM(802.11ac80)	CH 155	5775MHz

Note:

1. The measurements are performed at the highest, middle, lowest available channels.
2. The EUT has been tested as an independent unit. And Continual Transmitting in maximum power.
3. For the relevant Conducted Measurement, the temporary antenna connector is used during the measurement. Antenna Connector Impedance: 50Ω, Cable Loss: 1.0 dB
4. The EUT was programmed to be in continuously transmitting mode and the transmit duty cycle is more than 98%



4 General Information

4.1 General Description of E.U.T.

Product Name	:	Integrated machine
Model Name	:	JC-DN180-00
Additional model	:	JDB-5341,JDB-M5341,JDB-5741,JDB-M5741,JDB-5782,JDB-M5782, JDB-5781,JDB-5382,JDB-5712,JDB-M5712 Note:These models are exactly the same except for the hard drive and different memory. Maximum memory and hard disk drives were selected for testing
Operation Frequency	:	5745MHz~5825MHz
Number of Channel	:	5 Channels for 802.11a 5 Channels for 802.11n(HT20) 5 Channels for 802.11ac(HT20) 2 Channels for 802.11n(HT40) 2 Channels for 802.11ac(HT40) 1 Channels for 802.11ac(HT80)
Type of Modulation	:	OFDM with BPSK/QPSK/16QAM/64QAM/256QAM
Antenna installation	:	columnar antenna
Antenna Gain	:	6 dBi
The directional gain	:	9.01 dBi
Power supply	:	InputAC100-240V 50-60Hz DC 18.3V 5A
Hardware Version	:	N/A
Software Version	:	N/A



4.2 Channel List

802.11a/n20/ac20

Channel	Freq. (MHz)	Channel	Freq. (MHz)
149	5745	153	5765
157	5785	161	5805
165	5825		

802.11n40/ac40

Channel	Freq. (MHz)	Channel	Freq. (MHz)
151	5755	159	5795

802.11ac80

Channel	Freq. (MHz)
155	5775

4.3 Test Site

Precise Testing & Certification Co., Ltd.

Building 1, No. 6, Tongxin Road, Dongcheng Street, Dongguan, Guangdong, China

FCC Registration Number: 790290

A2LA Certificate No.: 4408.01

IC Registration Number: 12191A-1



5 Equipment During Test

5.1 Equipments List

Name of Equipment	Manufacturer	Model	Serial No.	Characteristics	Calibration Due	Cal. Interval
MXG Signal Analyzer	Agilent	N9020A	SER MY5111038	10Hz-30GHz	Aug. 21, 2021	1 Year
Coaxial Cable	CDS	79254	46107086	10Hz-30GHz	Aug. 21, 2021	1 Year
Power Meter	Anritsu	ML2495A	0949003	300MHz-40GHz	Aug. 21, 2021	1 Year
Power Sensor	Anritsu	MA2411B	0917017	300MHz-40GHz	Aug. 21, 2021	1 Year
EMI Test Receiver	Rohde&Schwarz	ESCI	101417	9KHz-3GHz	Aug. 21, 2021	1 Year
Loop Antenna	Schwarzbeck	FMZB 1519	012	9 KHz -30MHz	Aug. 21, 2021	1 Year
Bilog Antenna	SCHWARZBECK	VULB9160	9160-3355	25MHz-2GHz	Aug. 21, 2021	1 Year
Preamplifier (low frequency)	SCHWARZBECK	BBV 9475	9745-0013	1MHz-1GHz	Aug. 21, 2021	1 Year
Spectrum Analyzer	Agilent	E4407B	MY45109572	9KHz-40GHz	Aug. 21, 2021	1 Year
Horn Antenna	SCHWARZBECK	9120D	9120D-1246	1GHz-18GHz	Aug. 21, 2021	1 Year
Power Amplifier	LUNAR EM	LNA1G18-40	J10100000081	1GHz-26.5GHz	Aug. 21, 2021	1 Year
Horn Antenna	SCHWARZBECK	BBHA 9170	9170-181	14GHz-40GHz	Aug. 21, 2021	1 Year
Amplifier	SCHWARZBECK	BBV 9721	9721-205	18GHz-40GHz	Aug. 21, 2021	1 Year
Artificial Mains Network	Rohde&Schwarz	ENV216	102453	9KHz-300MHz	Aug. 19, 2021	1 Year
Artificial Mains Network	Rohde&Schwarz	ENV216	101342	9KHz-300MHz	Aug. 19, 2021	1 Year



5.2 Measurement Uncertainty

Parameter	Uncertainty
RF output power, conducted	$\pm 1.0\text{dB}$
Power Spectral Density, conducted	$\pm 2.2\text{dB}$
Radio Frequency	$\pm 1 \times 10^{-6}$
Bandwidth	$\pm 1.5 \times 10^{-6}$
Time	$\pm 2\%$
Duty Cycle	$\pm 2\%$
Temperature	$\pm 1^{\circ}\text{C}$
Humidity	$\pm 5\%$
DC and low frequency voltages	$\pm 3\%$
Conducted Emissions (150kHz~30MHz)	$\pm 3.64\text{dB}$
Radiated Emission(30MHz~1GHz)	$\pm 5.03\text{dB}$
Radiated Emission(1GHz~25GHz)	$\pm 4.74\text{dB}$

5.3 Description of Support Units

Equipment	Model No.	Series No.
adapters	Model: PSA301-120250U Input:AC100-240V 50-60Hz Output : DC 18.3V 5A	N/A
keyboards	Input:3.7V battery	N/A
Mouse	Input:3.7V battery	N/A


6 Conducted Emission Test

6.1 Test Standard and Limit

Test Standard	FCC Part15 Section 15.207&15.407		
Test Limit	Frequency	Maximum RF Line Voltage (dBuV)	
		Quasi-peak Level	Average Level
	150kHz~500kHz	66 ~ 56 *	56 ~ 46 *
	500kHz~5MHz	56	46
	5MHz~30MHz	60	50

Remark: (1) *Decreasing linearly with logarithm of the frequency.
(2) The lower limit shall apply at the transition frequency.

6.2 Test Setup

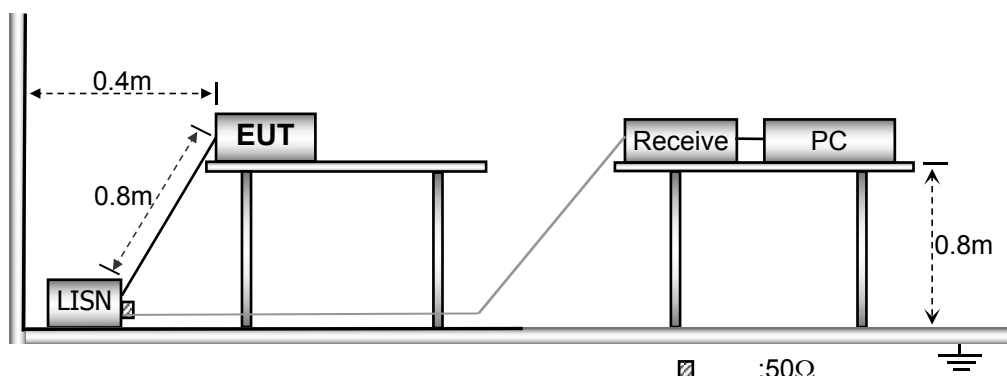

6.3 Test Procedure

The EUT system is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC ANSI C63.10-2013 on Conducted Emission Measurement.

The bandwidth of test receiver (ESCI) set at 9kHz.

The frequency range from 150kHz to 30MHz is checked.



5.4 Test Data

Note: The During the test, pre-scan 120Vac/60Hz and 240Vac/60Hz of the Power supply, found 120Vac/60Hz was worse case mode, the report only reflects the worst mode.


Conducted Emission Test Data

Operating Condition: 802.11ac80 CH 155

Test Specification: AC 120V/60Hz

Comment: Live Line

Tem.: 23.1°C Hum.: 54.6%

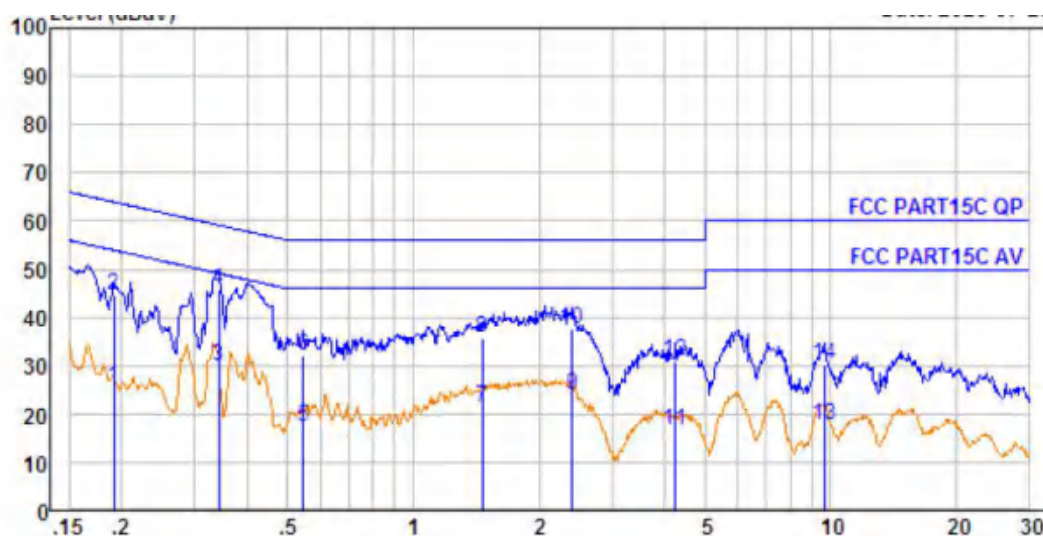

No.	Freq MHz	Cable Loss dB	AMN Factor dB	Receiver Reading dBuV	Emission Level dBuV	Limit dBuV	Over Limit dB	Remark
1.	0.191	0.27	9.59	15.56	25.42	53.98	-28.56	Average
2.	0.191	0.27	9.59	34.72	44.58	63.98	-19.40	QP
3.	0.343	0.39	9.60	19.87	29.86	49.13	-19.27	Average
4.	0.343	0.39	9.60	35.88	45.87	59.13	-13.26	QP
5.	0.546	0.43	9.61	7.33	17.37	46.00	-28.63	Average
6.	0.546	0.43	9.61	22.22	32.26	56.00	-23.74	QP
7.	1.464	0.47	9.61	11.17	21.25	46.00	-24.75	Average
8.	1.464	0.47	9.61	25.64	35.72	56.00	-20.28	QP
9.	2.409	0.47	9.62	13.86	23.95	46.00	-22.05	Average
10.	2.409	0.47	9.62	27.58	37.67	56.00	-18.33	QP
11.	4.247	0.48	9.66	6.49	16.63	46.00	-29.37	Average
12.	4.247	0.48	9.66	20.96	31.10	56.00	-24.90	QP
13.	9.654	0.56	9.77	7.31	17.64	50.00	-32.36	Average
14.	9.654	0.56	9.77	19.83	30.16	60.00	-29.84	QP




Conducted Emission Test Data

Operating Condition: 802.11ac80 CH 155

Test Specification: AC 120V/60Hz

Comment: Neutral Line

Tem.: 23.1°C Hum.: 54.6%

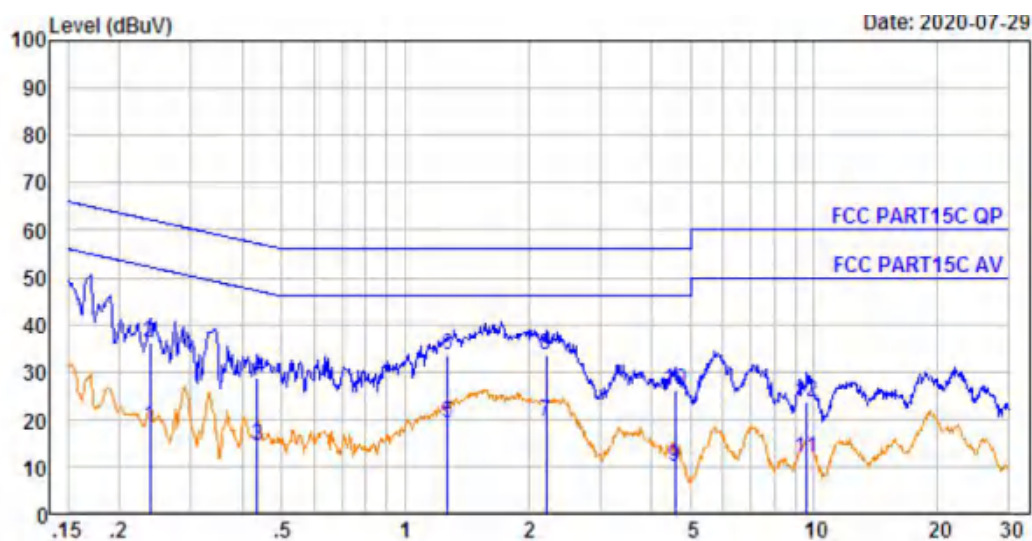

No.	Freq MHz	Cable Loss dB	AMN Factor dB	Receiver Reading dBuV	Emission Level dBuV	Limit dBuV	Over Limit dB	Remark
1.	0.238	0.32	9.61	8.58	18.51	52.17	-33.66	Average
2.	0.238	0.32	9.61	26.36	36.29	62.17	-25.88	QP
3.	0.435	0.41	9.63	4.45	14.49	47.15	-32.66	Average
4.	0.435	0.41	9.63	18.59	28.63	57.15	-28.52	QP
5.	1.269	0.46	9.64	9.22	19.32	46.00	-26.68	Average
6.	1.269	0.46	9.64	23.57	33.67	56.00	-22.33	QP
7.	2.213	0.47	9.64	9.63	19.74	46.00	-26.26	Average
8.	2.213	0.47	9.64	23.40	33.51	56.00	-22.49	QP
9.	4.574	0.49	9.70	-0.23	9.96	46.00	-36.04	Average
10.	4.574	0.49	9.70	15.89	26.08	56.00	-29.92	QP
11.	9.603	0.56	9.80	1.44	11.80	50.00	-38.20	Average
12.	9.603	0.56	9.80	13.34	23.70	60.00	-36.30	QP



7 . Radiation Spurious Emission and Band Edge

7.1 Test Standard and Limit

Test Standard	FCC Part15 C Section 15.209, 15.205 and 15.407				
Test Limit	Frequency (MHz)	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz~0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz~88MHz	100	40.0	Quasi-peak	3
	88MHz~216MHz	150	43.5	Quasi-peak	3
	216MHz~960MHz	200	46.0	Quasi-peak	3
	960MHz~1000MHz	500	54.0	Quasi-peak	3
	Above 1000MHz	500	54.0	Average	3
		-	68.2	Peak	3

Remark:

(1)The lower limit shall apply at the transition frequency.

(2) 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

(3)Above 1GHz limit: $E[dBuV/m] = EIRP[dBm] + 95.2 = 68.2 \text{ dBuV/m}$, for $EIPR[dBm] = -27dBm$.

7.2 Test Setup

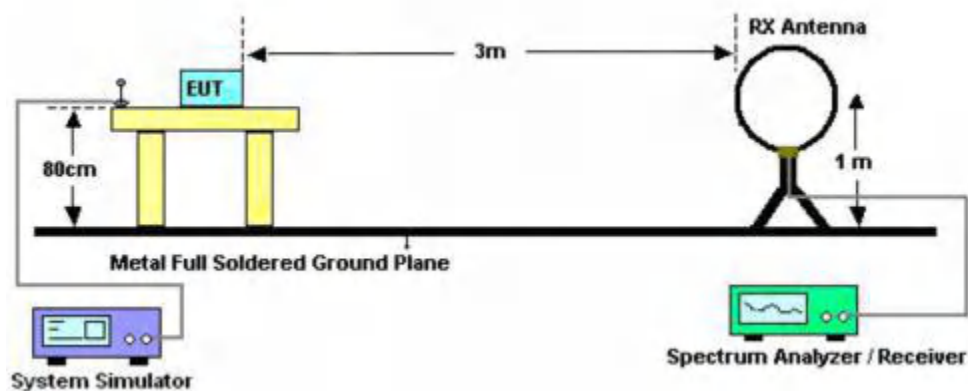


Figure 1. Below 30MHz

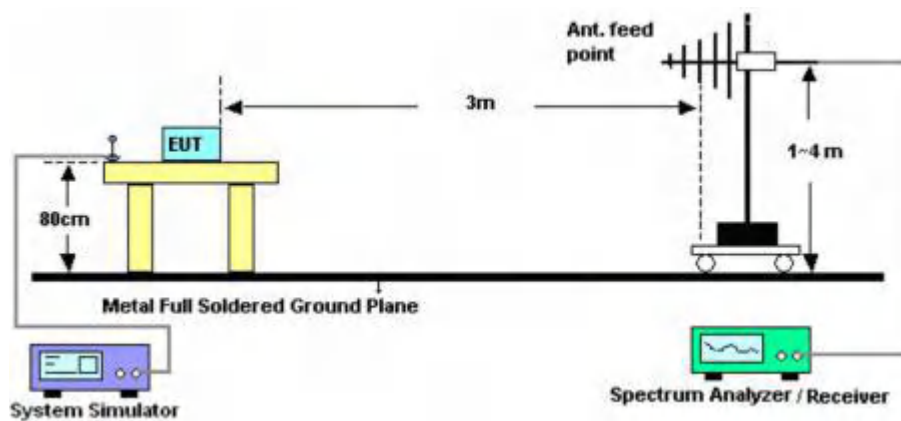


Figure 2. 30MHz to 1GHz

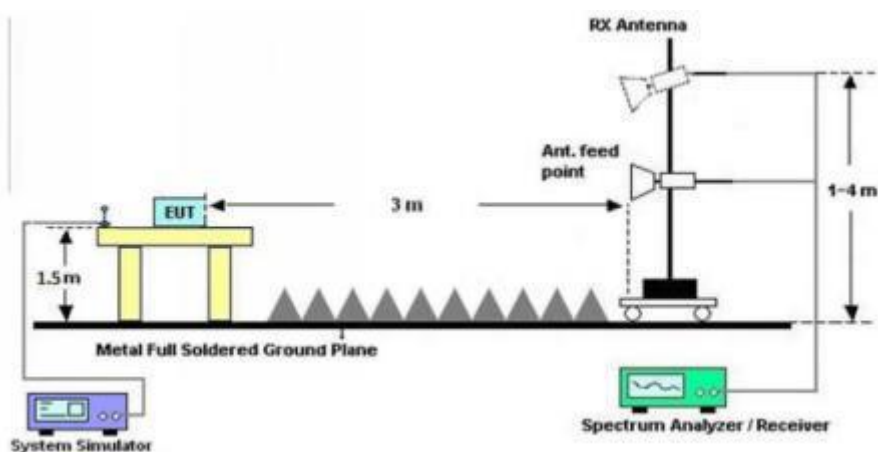


Figure 3. Above 1 GHz



7.3 Test Procedure

For below 1GHz: The EUT is placed on a turntable, which is 0.8m above the ground plane.

For above 1GHz: The EUT is placed on a turntable, which is 1.5m above the ground plane.

The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. The antenna can be moved up and down from 1 to 4 meters to find out the maximum emission level. Rotated the EUT through three orthogonal axes to determine the maximum emissions, both horizontal and vertical polarization of the antenna are set on test. The EUT is tested in 9*6*6 Chamber. The device is evaluated in xyz orientation.

For the radiated emission test above 1GHz:

Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.

For 9kHz to 150kHz, Set the spectrum analyzer as:

RBW = 200Hz, VBW =1kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 150kHz to 30MHz, Set the spectrum analyzer as:

RBW = 9KHz, VBW =30kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 30MHz to 1000MHz, Set the spectrum analyzer as:

RBW = 100kHz, VBW =300kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For above 1GHz, Set the spectrum analyzer as:

RBW =1MHz, VBW =1MHz, Detector= Peak, Trace mode= Max hold, Sweep- auto couple.

RBW =1MHz, VBW =10Hz, Detector= Average, Trace mode= Max hold, Sweep- auto couple.



7.4 Test Data

PASS

The test results of 9kHz-30MHz was attenuated more than 20dB below the permissible limits, so the results don't record in the report.

During the test, pre-scan all modes, and found the 802.11ac80 CH 155 which is the worst case, only the worst case is recorded in the report.



Test Results (30~1000MHz)

Temp.(°C)/Hum.(%RH): 24.5°C/52%

Test Mode: 802.11ac80 CH 155

Power Source: DC 18.3V

Polarization: Horizontal

JC-DN180-00
(DDR4)



No.	Freq MHz	Cable Loss dB	ANT Factor dB/m	Receiver Reading dBuV	Preamplifier Factor dB	Emission Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark
1.	87.418	3.04	8.95	39.58	29.98	21.59	40.00	-18.41	QP
2.	130.379	3.73	12.70	35.45	30.01	21.87	43.50	-21.63	QP
3.	252.948	4.87	12.55	42.11	30.20	29.33	46.00	-16.67	QP
4.	375.939	5.55	14.61	41.91	30.62	31.45	46.00	-14.55	QP
5.	625.078	6.42	19.16	44.89	31.03	39.44	46.00	-6.56	QP
6.	875.247	7.00	21.86	42.57	31.07	40.36	46.00	-5.64	QP



Report No.: PTC20090703102E-FC02


Test Results (30~1000MHz)

Temp.(°C)/Hum.(%RH): 24.5°C/52%

Test Mode: 802.11ac80 CH 155

Power Source: DC 18.3V

Polarization: Vertical

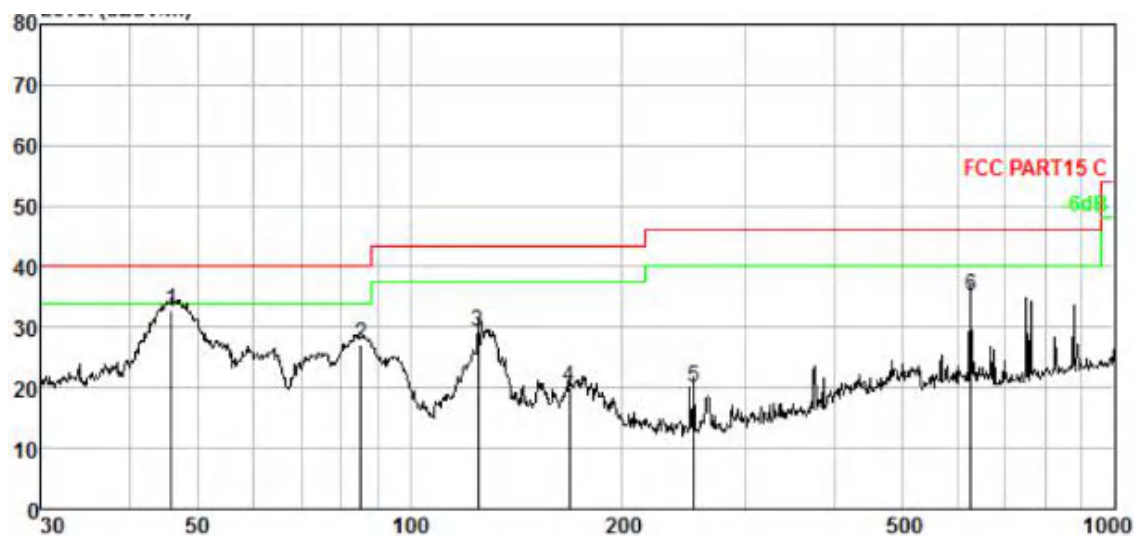


No.	Freq MHz	Cable Loss dB	ANT Factor dB/m	Receiver Reading dBuV	Preamp Factor dB	Emission Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark
1.	45.855	1.93	12.26	48.53	29.92	32.80	40.00	-7.20	QP
2.	85.298	3.00	8.73	45.39	29.97	27.15	40.00	-12.85	QP
3.	125.007	3.66	12.34	43.25	30.01	29.24	43.50	-14.26	QP
4.	168.414	4.17	13.40	32.56	30.03	20.10	43.50	-23.40	QP
5.	252.948	4.87	12.55	32.74	30.20	19.96	46.00	-26.04	QP
6.	625.078	6.42	19.16	40.70	31.03	35.25	46.00	-10.75	QP



JDB-5781: (8GB DDR3 1600) (128G SSD)


Horizontal

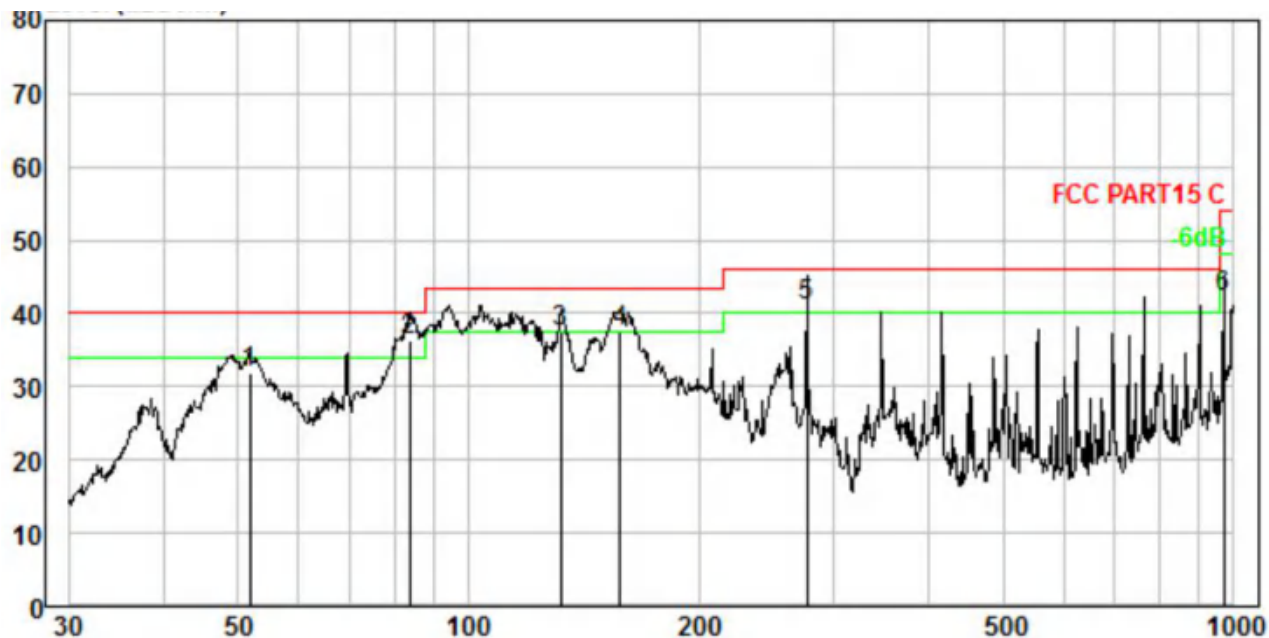

No.	Freq MHz	Cable Loss dB	ANT Factor dB/m	Receiver Reading dBuV	Preamp Factor dB	Emission Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark
1.	51.843	2.14	12.10	47.42	29.92	31.74	40.00	-8.26	QP
2.	83.816	2.97	8.77	54.45	29.97	36.22	40.00	-3.78	QP
3.	132.221	3.75	12.82	50.88	30.01	37.44	43.50	-6.06	QP
4.	158.112	4.06	14.03	49.33	30.02	37.40	43.50	-6.10	QP
5.	277.094	5.02	12.90	53.49	30.27	41.14	46.00	-4.86	QP
6.	972.337	7.18	22.66	43.48	31.05	42.27	54.00	-11.73	QP



Vertical

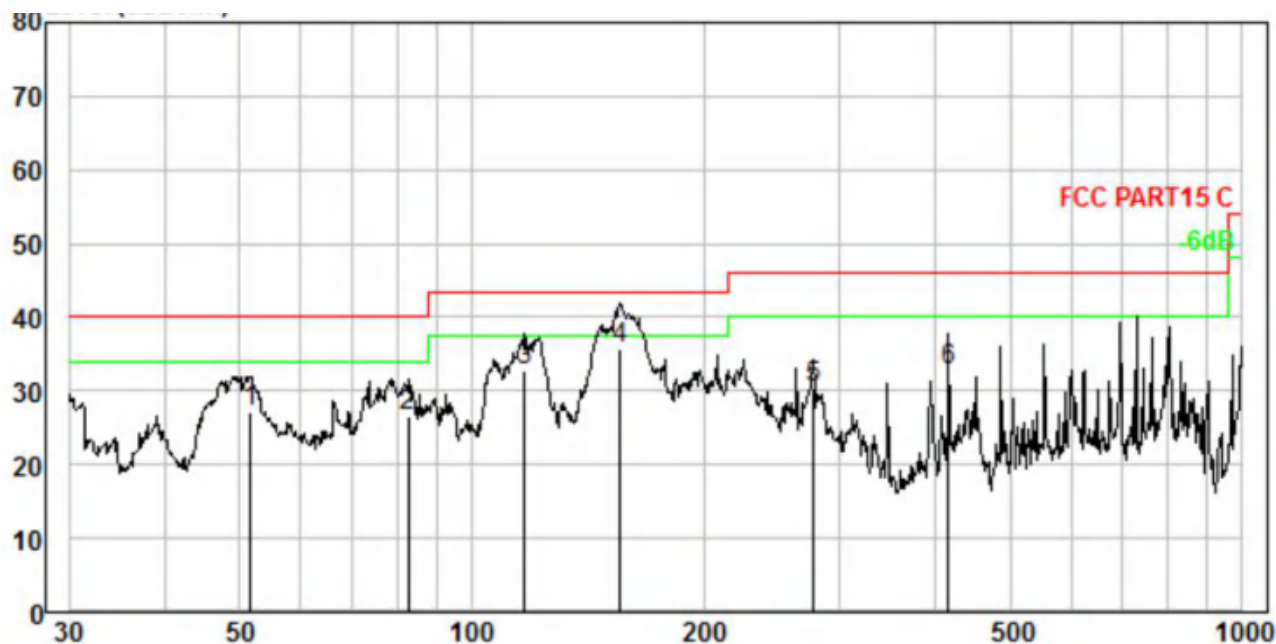

No.	Freq MHz	Cable Loss dB	ANT Factor dB/m	Receiver Reading dBuV	Preamplifier Factor dB	Emission Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark
1.	51.662	2.14	12.10	42.71	29.92	27.03	40.00	-12.97	QP
2.	82.648	2.95	8.84	44.64	29.97	26.46	40.00	-13.54	QP
3.	116.950	3.54	11.64	47.73	30.00	32.91	43.50	-10.59	QP
4.	155.910	4.04	13.94	47.89	30.02	35.85	43.50	-7.65	QP
5.	278.067	5.03	12.91	42.68	30.27	30.35	46.00	-15.65	QP
6.	416.179	5.73	15.17	42.65	30.74	32.81	46.00	-13.19	QP



Test Results (Above 1000MHz)

ANT A:

Test mode:	IEEE 802.11a	Test channel:	Low CH
------------	--------------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
11490.00	40.24	31.98	17.08	33.91	55.39	68.20	-12.81	V
17235.00	39.68	32.65	20.03	34.85	57.51	68.20	-10.69	V
11490.00	41.99	31.98	17.08	33.91	57.14	68.20	-11.06	H
17235.00	40.92	32.65	20.03	34.85	58.75	68.20	-9.45	H

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
11490.00	28.92	31.98	17.08	33.91	44.07	54.00	-9.93	V
17235.00	28.73	32.65	20.03	34.85	46.56	54.00	-7.44	V
11490.00	29.16	31.98	17.08	33.91	44.31	54.00	-9.69	H
17235.00	27.72	32.65	20.03	34.85	45.55	54.00	-8.45	H

Test mode:	IEEE 802.11a	Test channel:	Mid CH
------------	--------------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
11570.00	39.84	32.44	17.18	33.91	55.55	68.20	-12.65	V
17355.00	40.70	32.78	20.12	34.86	58.74	68.20	-9.46	V
11570.00	41.67	32.44	17.18	33.91	57.38	68.20	-10.82	H
17355.00	41.90	32.78	20.12	34.86	59.94	68.20	-8.26	H



Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
11570.00	27.38	32.44	17.18	33.91	43.09	54.00	-10.91	V
17355.00	27.87	32.78	20.12	34.86	45.91	54.00	-8.09	V
11570.00	27.13	32.44	17.18	33.91	42.84	54.00	-11.16	H
17355.00	27.30	32.78	20.12	34.86	45.34	54.00	-8.66	H

Test mode:	IEEE 802.11a	Test channel:	High CH
------------	--------------	---------------	---------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
11650.00	39.70	32.59	18.02	33.92	56.39	68.20	-11.81	V
17475.00	39.88	32.87	20.15	34.88	58.02	68.20	-10.18	V
11650.00	41.55	32.59	18.02	33.92	58.24	68.20	-9.96	H
17475.00	41.70	32.87	20.15	34.88	59.84	68.20	-8.36	H

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
11650.00	27.45	32.59	18.02	33.92	44.14	54.00	-9.86	V
17475.00	27.26	32.87	20.15	34.88	45.40	54.00	-8.60	V
11650.00	28.39	32.59	18.02	33.92	45.08	54.00	-8.92	H
17475.00	27.03	32.87	20.15	34.88	45.17	54.00	-8.83	H


Note:

Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor


All other emissions for frequency 1G~40GHz are attenuated 20dB below the limits, so it does not recorded in report.




Band Edge test:

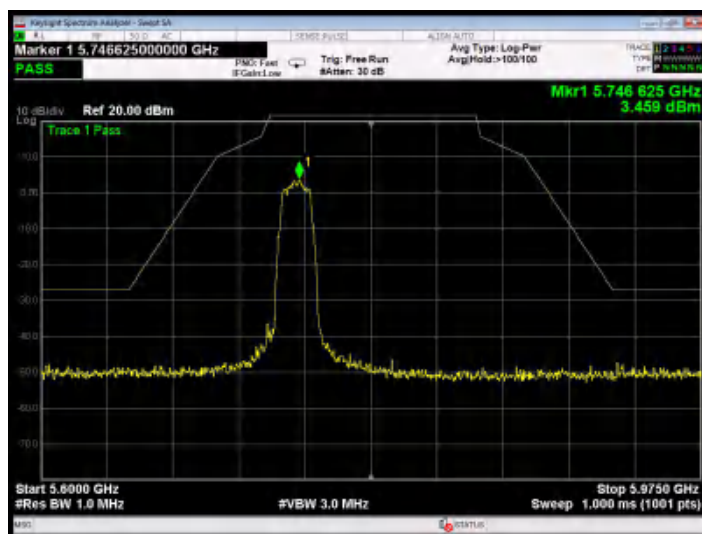


802.11a: Band Edge, Left Side

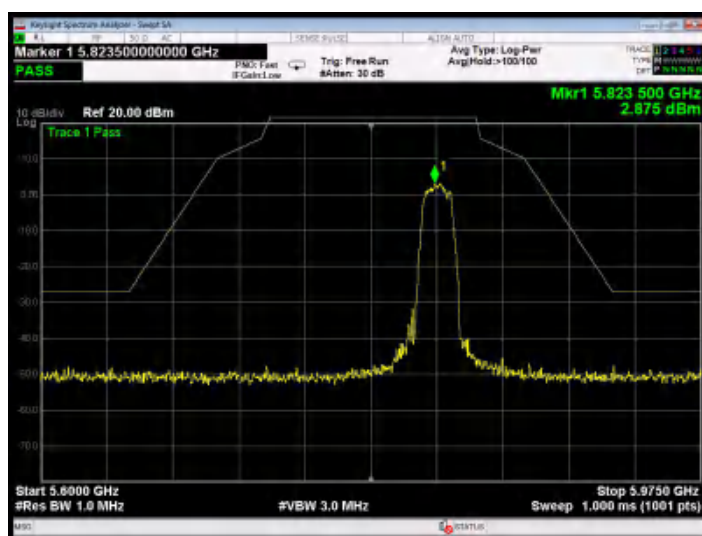


802.11a: Band Edge, Right Side

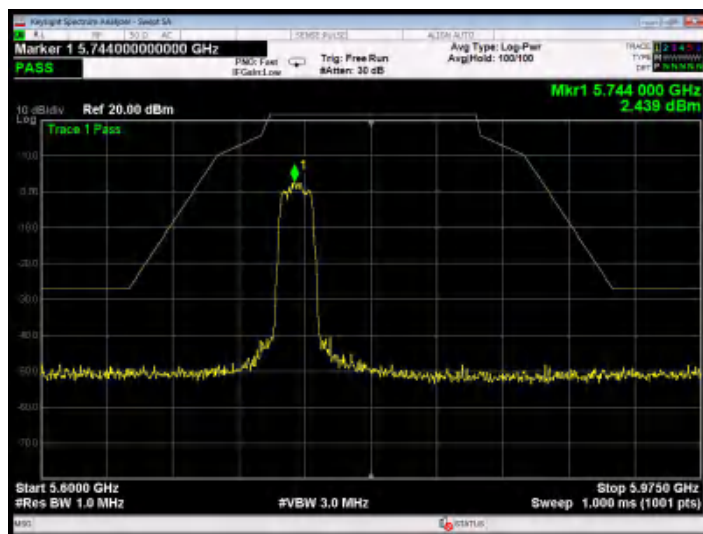


802.11n(20): Band Edge, Left Side

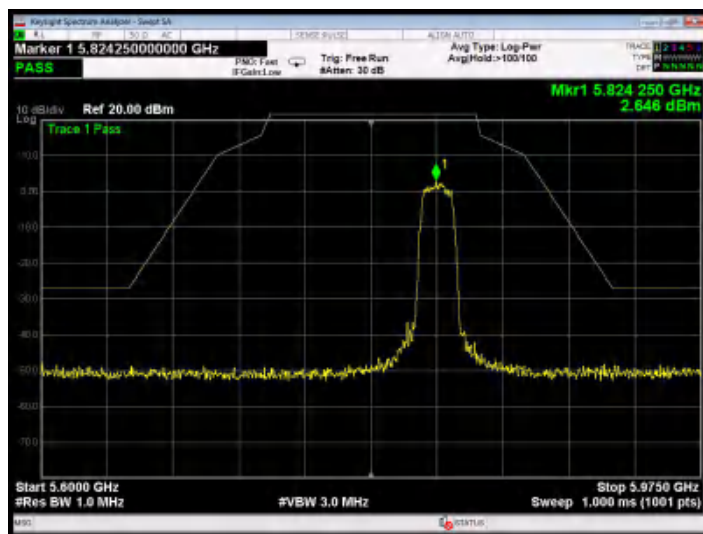


802.11n(20): Band Edge, Right Side

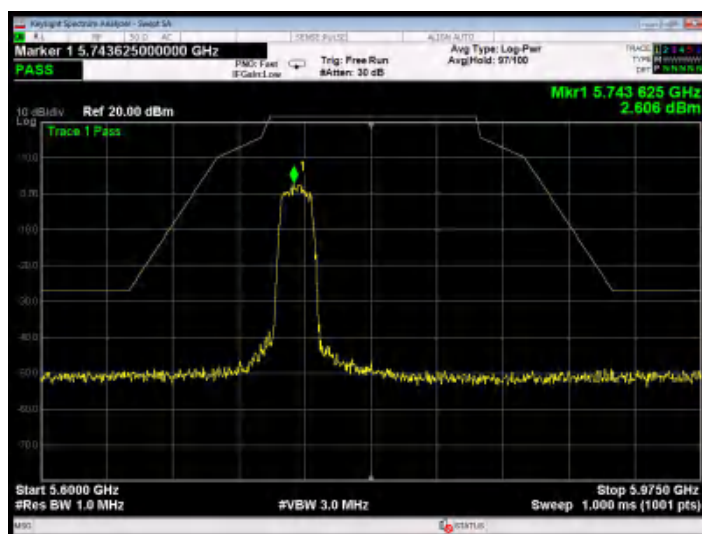


802.11ac(20): Band Edge, Left Side

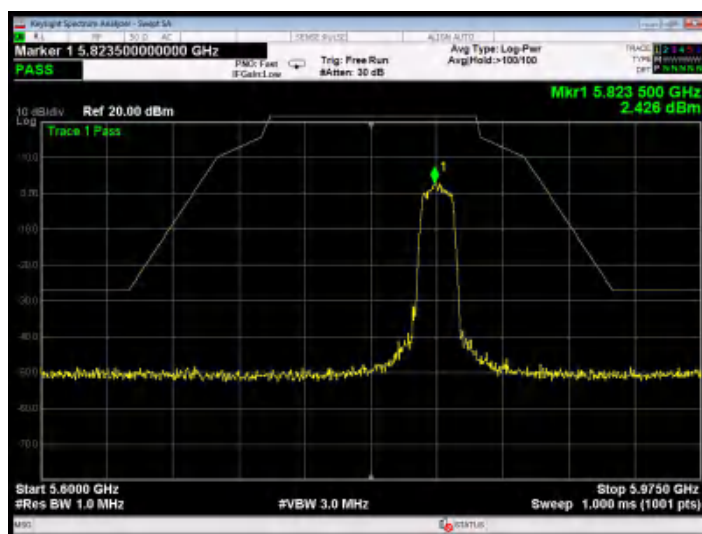


802.11ac(20): Band Edge, Right Side

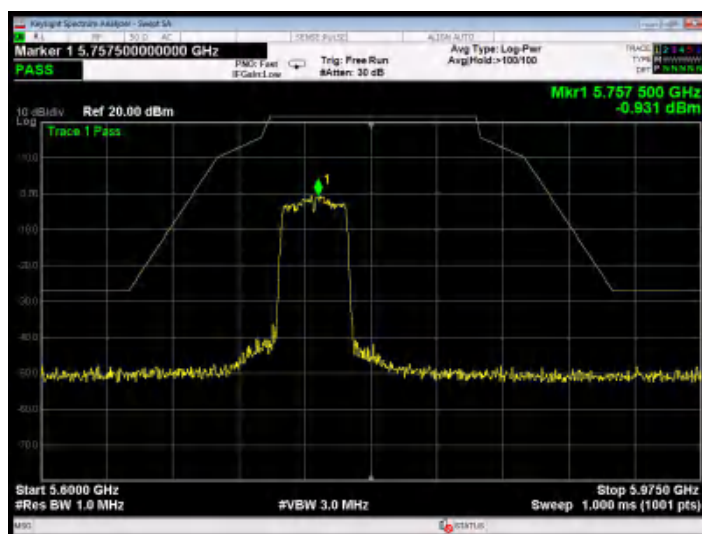


802.11n(40): Band Edge, Left Side

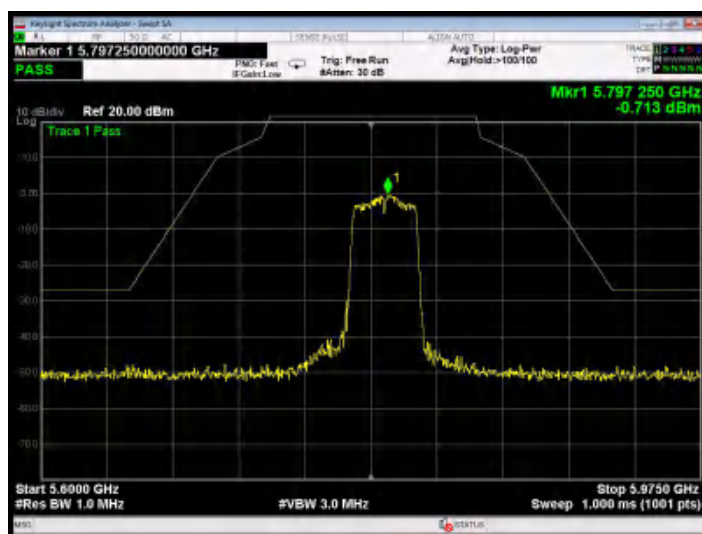


802.11n(40): Band Edge, Right Side

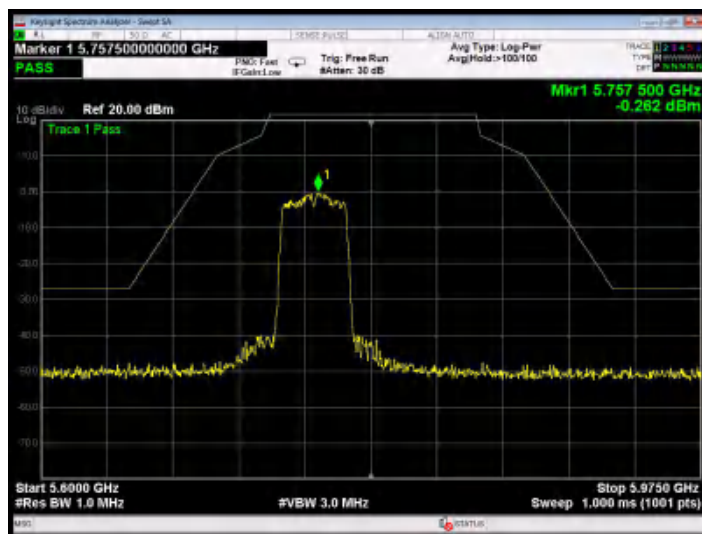

802.11ac(40): Band Edge, Left Side

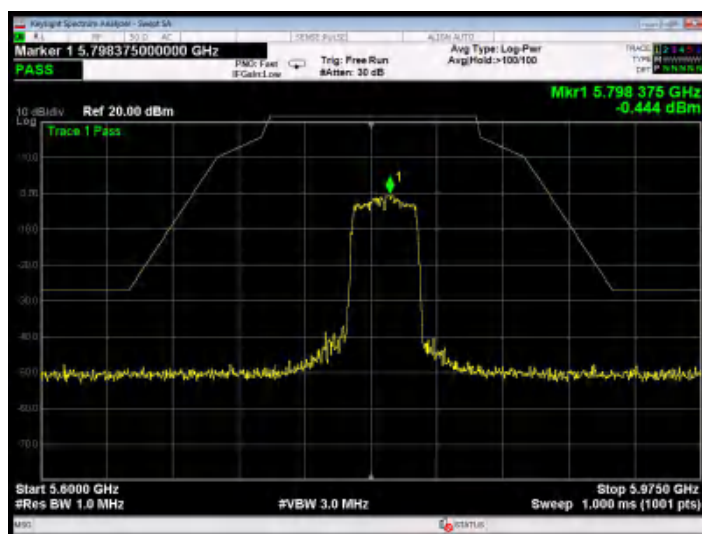

802.11ac(40): Band Edge, Right Side

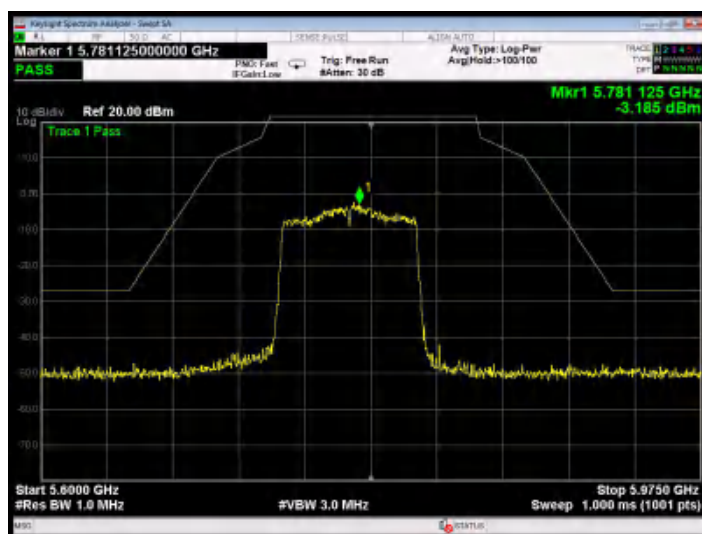

802.11ac(80): Band Edge



Test Results (Above 1000MHz)

ANT B:

Test mode:	IEEE 802.11a	Test channel:	Low CH
------------	--------------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
11490.00	41.93	31.98	17.08	33.91	57.08	68.20	-11.12	V
17235.00	40.88	32.65	20.03	34.85	58.71	68.20	-9.49	V
11490.00	41.64	31.98	17.08	33.91	56.79	68.20	-11.41	H
17235.00	39.70	32.65	20.03	34.85	57.53	68.20	-10.67	H

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
11490.00	27.75	31.98	17.08	33.91	42.90	54.00	-11.10	V
17235.00	27.18	32.65	20.03	34.85	45.01	54.00	-8.99	V
11490.00	29.26	31.98	17.08	33.91	44.41	54.00	-9.59	H
17235.00	27.54	32.65	20.03	34.85	45.37	54.00	-8.63	H

Test mode:	IEEE 802.11a	Test channel:	Mid CH
------------	--------------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
11570.00	41.57	32.44	17.18	33.91	57.28	68.20	-10.92	V
17355.00	39.59	32.78	20.12	34.86	57.63	68.20	-10.57	V
11570.00	41.60	32.44	17.18	33.91	57.31	68.20	-10.89	H
17355.00	41.37	32.78	20.12	34.86	59.41	68.20	-8.79	H



Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
11570.00	27.33	32.44	17.18	33.91	43.04	54.00	-10.96	V
17355.00	29.75	32.78	20.12	34.86	47.79	54.00	-6.21	V
11570.00	28.03	32.44	17.18	33.91	43.74	54.00	-10.26	H
17355.00	29.35	32.78	20.12	34.86	47.39	54.00	-6.61	H

Test mode:	IEEE 802.11a	Test channel:	High CH
------------	--------------	---------------	---------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
11650.00	39.71	32.59	18.02	33.92	56.40	68.20	-11.80	V
17475.00	41.44	32.87	20.15	34.88	59.58	68.20	-8.62	V
11650.00	41.58	32.59	18.02	33.92	58.27	68.20	-9.93	H
17475.00	40.95	32.87	20.15	34.88	59.09	68.20	-9.11	H

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
11650.00	27.40	32.59	18.02	33.92	44.09	54.00	-9.91	V
17475.00	28.87	32.87	20.15	34.88	47.01	54.00	-6.99	V
11650.00	29.59	32.59	18.02	33.92	46.28	54.00	-7.72	H
17475.00	29.91	32.87	20.15	34.88	48.05	54.00	-5.95	H


Note:

1. Final Level =Receiver Read level + Antenna Factor + Cable Loss–Preamplifier Factor


All other emissions for frequency 1G~40GHz are attenuated 20dB below the limits, so it does not recorded in report.




Band Edge test:

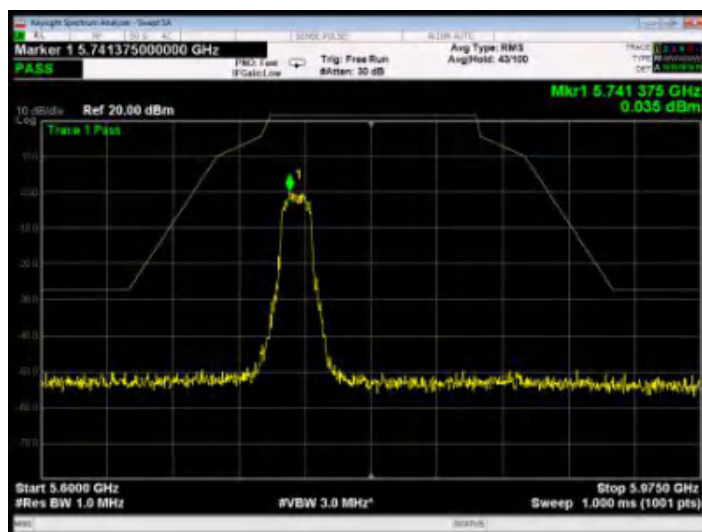


802.11a: Band Edge, Left Side

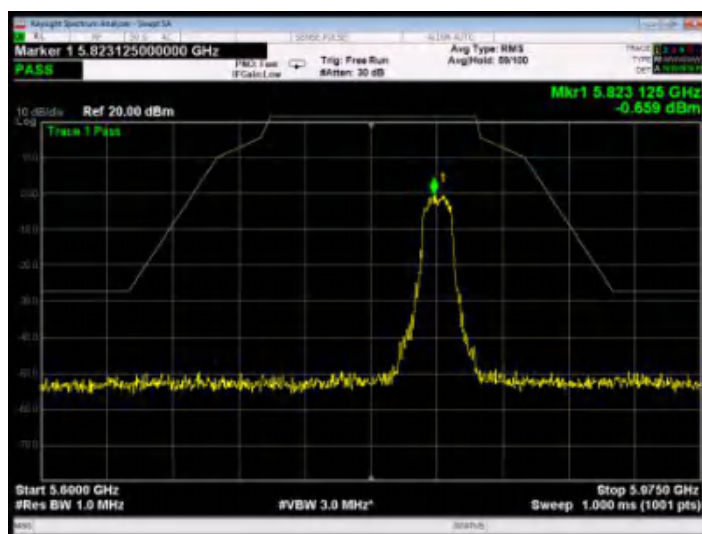


802.11a: Band Edge, Right Side

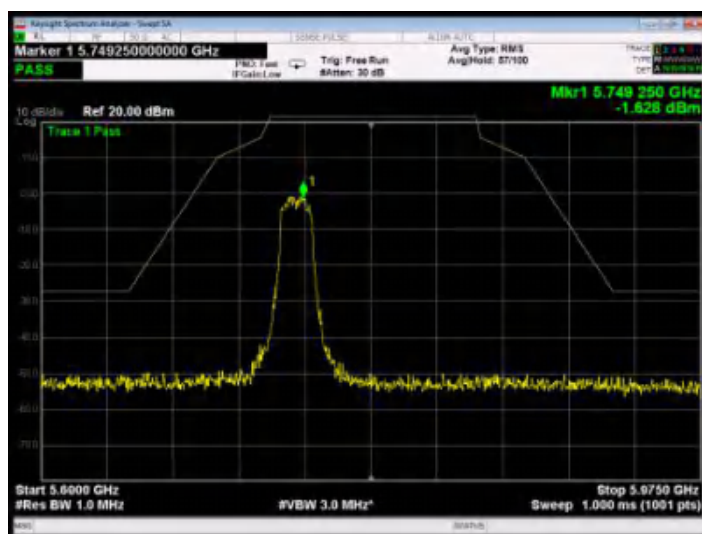


802.11n(20): Band Edge, Left Side

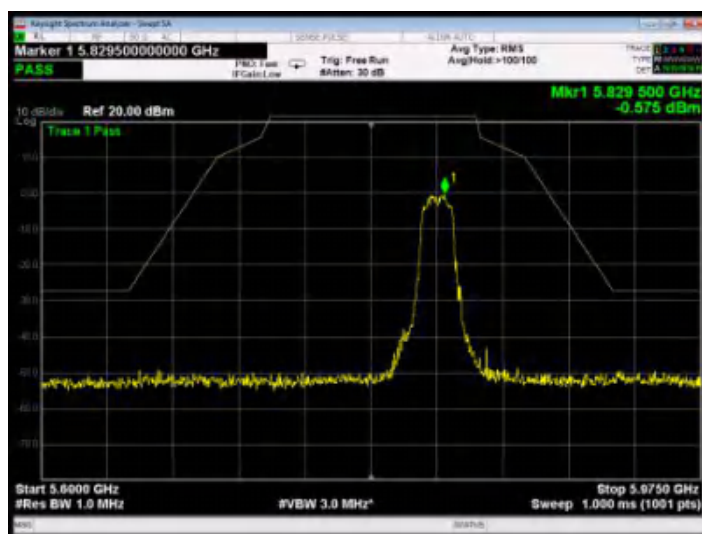


802.11n(20): Band Edge, Right Side

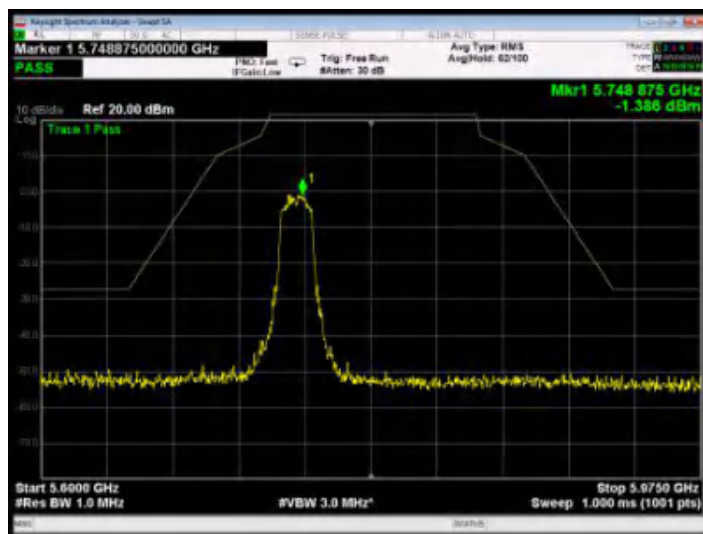


802.11ac(20): Band Edge, Left Side

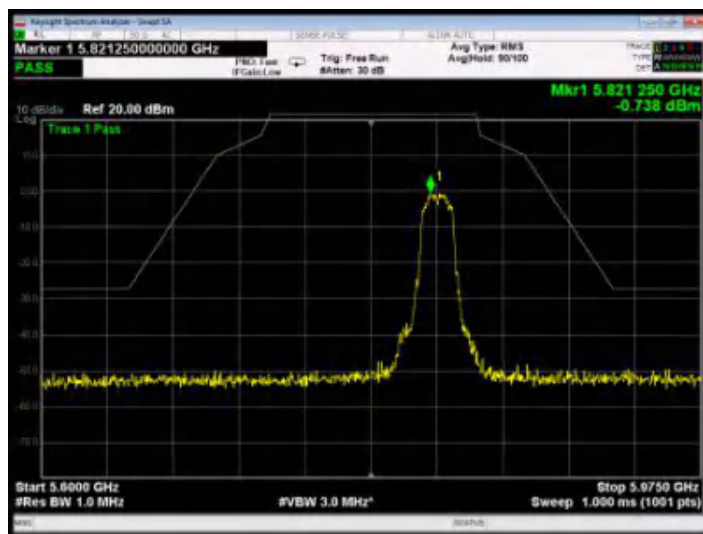


802.11ac(20): Band Edge, Right Side

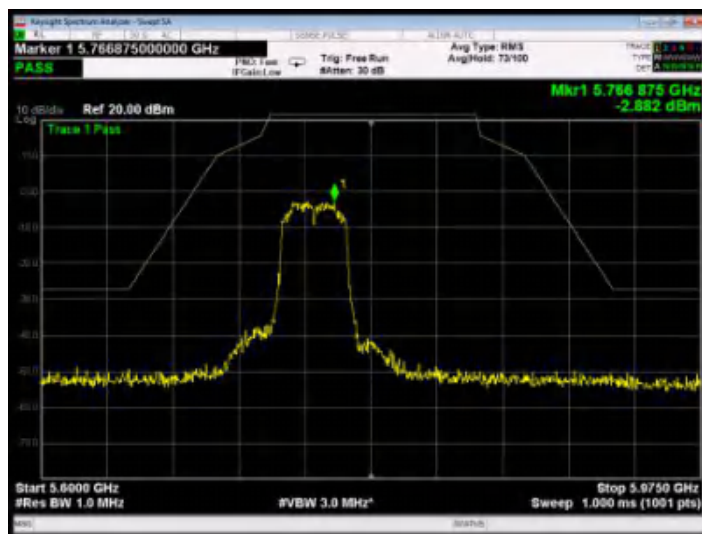


802.11n(40): Band Edge, Left Side

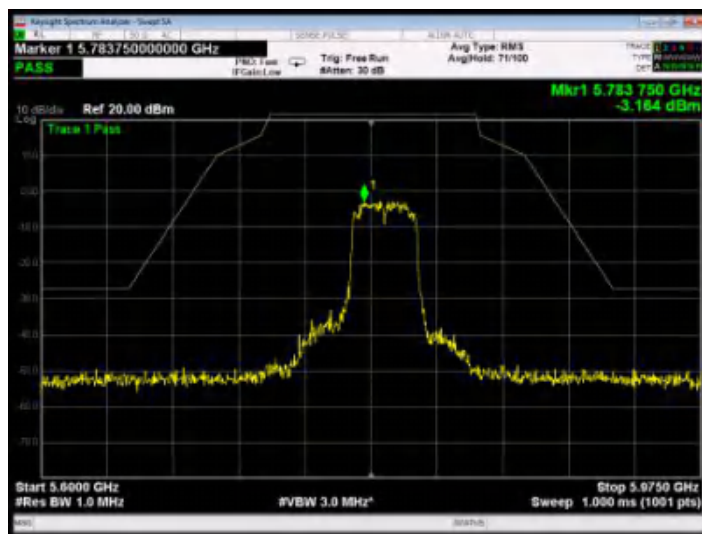


802.11n(40): Band Edge, Right Side

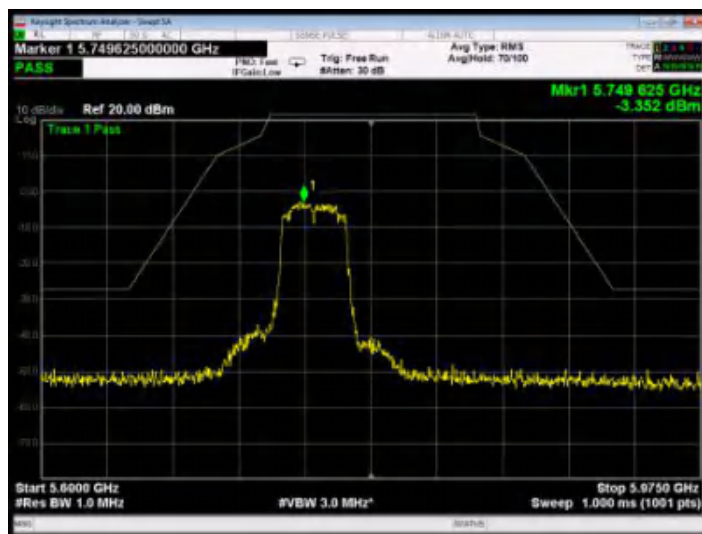

802.11ac(40): Band Edge, Left Side

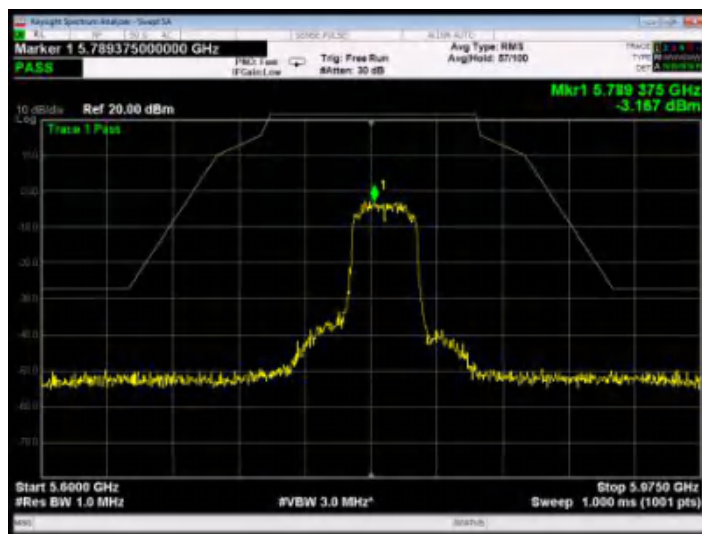

802.11ac(40): Band Edge, Right Side

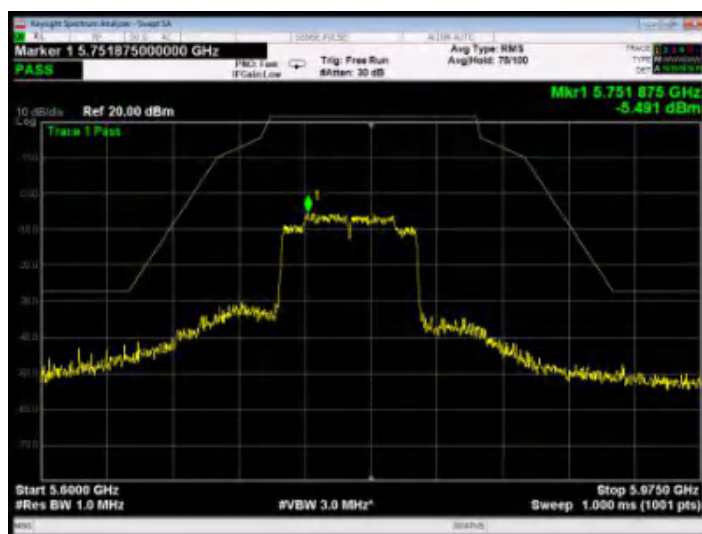

802.11ac(80): Band Edge



Test Results (Above 1000MHz)

ANT A+B:

Test mode:	IEEE 802.11n20	Test channel:	Low CH
------------	----------------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
11490.00	42.18	31.98	17.08	33.91	57.33	68.20	-10.87	V
17235.00	41.75	32.65	20.03	34.85	59.58	68.20	-8.62	V
11490.00	42.18	31.98	17.08	33.91	57.33	68.20	-10.87	H
17235.00	41.49	32.65	20.03	34.85	59.32	68.20	-8.88	H

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
11490.00	29.10	31.98	17.08	33.91	44.25	54.00	-9.75	V
17235.00	29.36	32.65	20.03	34.85	47.19	54.00	-6.81	V
11490.00	30.65	31.98	17.08	33.91	45.80	54.00	-8.20	H
17235.00	29.40	32.65	20.03	34.85	47.23	54.00	-6.77	H

Test mode:	IEEE 802.11n20	Test channel:	Mid CH
------------	----------------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
11570.00	40.45	32.44	17.18	33.91	56.16	68.20	-12.04	V
17355.00	42.91	32.78	20.12	34.86	60.95	68.20	-7.25	V
11570.00	40.78	32.44	17.18	33.91	56.49	68.20	-11.71	H
17355.00	42.72	32.78	20.12	34.86	60.76	68.20	-7.44	H

Average value:



Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
11570.00	30.34	32.44	17.18	33.91	46.05	54.00	-7.95	V
17355.00	29.15	32.78	20.12	34.86	47.19	54.00	-6.81	V
11570.00	30.06	32.44	17.18	33.91	45.77	54.00	-8.23	H
17355.00	29.77	32.78	20.12	34.86	47.81	54.00	-6.19	H

Test mode:	IEEE 802.11n20	Test channel:	High CH
------------	----------------	---------------	---------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
11650.00	42.83	32.59	18.02	33.92	59.52	68.20	-8.68	V
17475.00	40.96	32.87	20.15	34.88	59.10	68.20	-9.10	V
11650.00	42.96	32.59	18.02	33.92	59.65	68.20	-8.55	H
17475.00	40.72	32.87	20.15	34.88	58.86	68.20	-9.34	H

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
11650.00	30.24	32.59	18.02	33.92	46.93	54.00	-7.07	V
17475.00	29.93	32.87	20.15	34.88	48.07	54.00	-5.93	V
11650.00	30.91	32.59	18.02	33.92	47.60	54.00	-6.40	H
17475.00	28.19	32.87	20.15	34.88	46.33	54.00	-7.67	H

Note:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor

All other emissions for frequency 1G~40GHz are attenuated 20dB below the limits, so it does not recorded in report.

ANT A& ANT B both has more than 3dB below the limits, so the MIMO mode is passed.




8 Maximum Average Output Power Test

8.1 Test Standard and Limit

Test Standard	FCC Part15 C Section 15.407 (a) (3)
Test Limit	30dBm

8.2 Test Setup



8.3 Test Procedure

1. The Transmitter output (antenna port) was connected to the power meter.
2. Open the EUT and the power meter, and then record the maximum average power value.
3. Repeat above procedures on all channels needed to be tested.

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.



8.4 Test Data

Test Item	:	Max. Average output power	Test Mode	:	CH Low ~ CH High
Test Voltage	:	DC 18.3V	Test Result	:	PASS

ANT A:

Mode	Channel Frequency (MHz)	Power output (dBm)	Correctional Limit (dBm)	Results
802.11a	5745	13.60	30	PASS
	5785	13.27	30	PASS
	5825	13.14	30	PASS
802.11n20	5745	13.25	30	PASS
	5785	12.84	30	PASS
	5825	12.79	30	PASS
802.11ac20	5745	12.78	30	PASS
	5785	12.79	30	PASS
	5825	12.69	30	PASS
802.11n40	5755	13.15	30	PASS
	5795	12.80	30	PASS
802.11ac40	5755	12.55	30	PASS
	5795	12.60	30	PASS
802.11ac80	5775	13.03	30	PASS



ANT B:

Mode	Channel Frequency (MHz)	Power output (dBm)	Correctional Limit (dBm)	Results
802.11a	5745	12.68	30	PASS
	5785	12.39	30	PASS
	5825	12.31	30	PASS
802.11n20	5745	12.66	30	PASS
	5785	12.18	30	PASS
	5825	13.00	30	PASS
802.11ac20	5745	12.62	30	PASS
	5785	12.19	30	PASS
	5825	12.44	30	PASS
802.11n40	5755	13.72	30	PASS
	5795	13.19	30	PASS
802.11ac40	5755	13.28	30	PASS
	5795	13.17	30	PASS
802.11ac80	5775	13.68	30	PASS



ANT A+B:

Mode	Channel Frequency (MHz)	Power output (dBm)	Correctional Limit (dBm)	Results
802.11n20	5745	15.98	26.99	PASS
	5785	15.53	26.99	PASS
	5825	15.91	26.99	PASS
802.11ac20	5745	15.71	26.99	PASS
	5785	15.51	26.99	PASS
	5825	15.58	26.99	PASS
802.11n40	5755	16.45	26.99	PASS
	5795	16.01	26.99	PASS
802.11ac40	5755	15.94	26.99	PASS
	5795	15.90	26.99	PASS
802.11ac80	5775	16.38	26.99	PASS




9 Occupy Bandwidth Test

9.1 Test Standard

Test Standard	FCC Part15 C Section 15.407 (a)(5)&15.407(e)
---------------	--

9.2 Test Setup



9.3 Test Procedure

1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as:

26 dB & 99% bandwidth

RBW = approximately 1% of the emission bandwidth;

Set the VBW > RBW;

Detector= Peak

Trace mode= Max hold.

Sweep- auto couple.

6 dB bandwidth

RBW = 100kHz;

Set the video bandwidth (VBW) ≥ 3 RBW;

Detector= Peak

Trace mode= Max hold.

Sweep- auto couple.



4. Measure the maximum width of the emission that is 26dB /6dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer

5. Repeat until all the rest channels are investigated.

9.4 Test Data

Test Item : 6dB &26dB BW

Test Voltage : DC 18.3V

Test Mode : CH Low ~ CH High

Test Result : PASS

ANT A:


Mode	Channel Frequency (MHz)	6dB BW(MHz)	Limit	Results
802.11a	5745	16.32	>0.5MHz	PASS
	5785	16.37		PASS
	5825	16.35		PASS
802.11n20	5745	17.32		PASS
	5785	17.30		PASS
	5825	16.91		PASS
802.11ac20	5745	16.92		PASS
	5785	17.58		PASS
	5825	17.55		PASS
802.11n40	5755	35.49		PASS
	5795	35.45		PASS
802.11ac40	5755	35.91		PASS
	5795	35.71		PASS
802.11ac80	5775	75.46		PASS




Mode	Channel Frequency (MHz)	26dB BW(MHz)	99% Bandwidth (MHz)
802.11a	5745	21.09	16.652
	5785	21.17	16.661
	5825	21.27	16.690
802.11n20	5745	21.57	17.871
	5785	21.55	17.855
	5825	21.60	17.797
802.11ac20	5745	21.50	17.770
	5785	21.40	17.815
	5825	21.61	17.903
802.11n40	5755	39.80	36.265
	5795	39.49	36.268
802.11ac40	5755	39.78	36.231
	5795	39.76	36.267
802.11ac80	5775	80.90	75.432




6dB Bandwidth

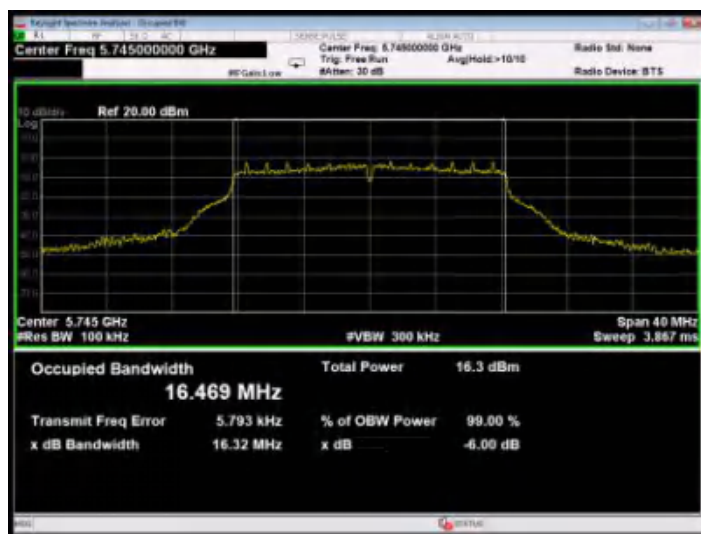


Test Mode: 802.11a--Low

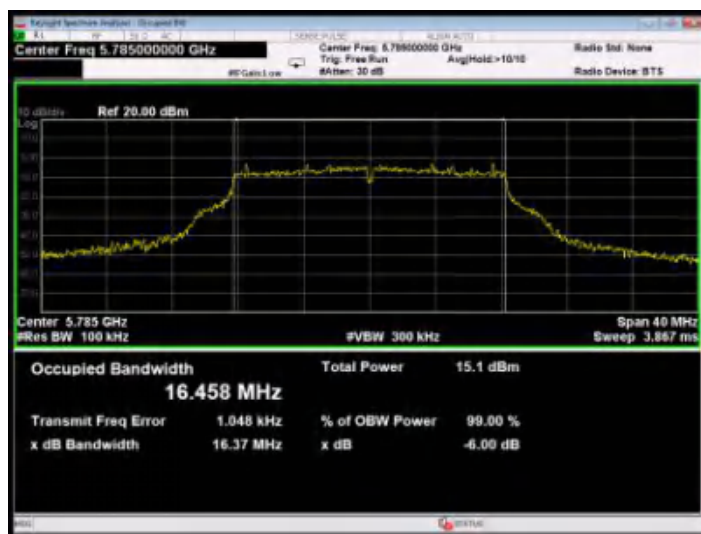


Test Mode: 802.11a---Middle

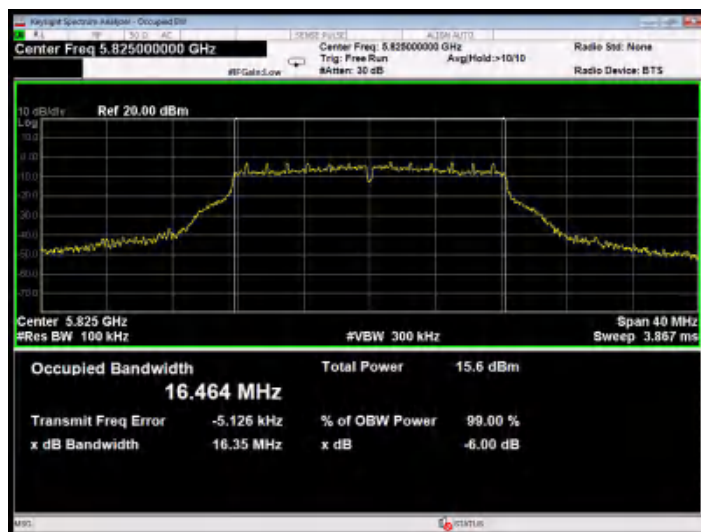


Test Mode: 802.11a---High

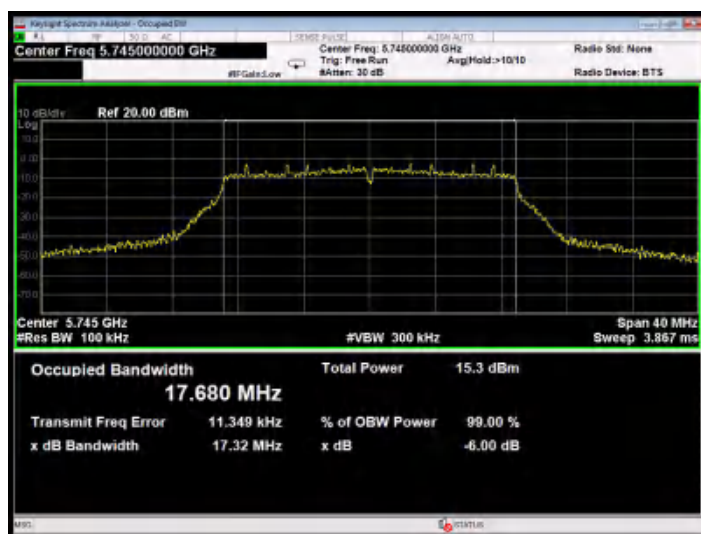


Test Mode: 802.11n20---Low

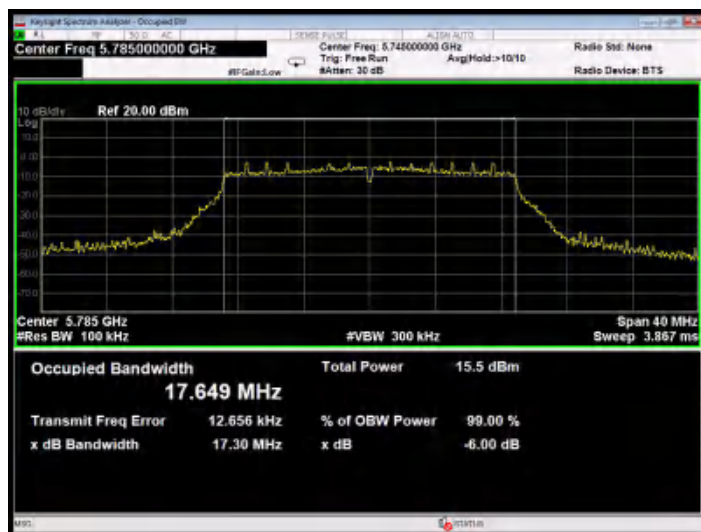


Test Mode: 802.11n20---Middle

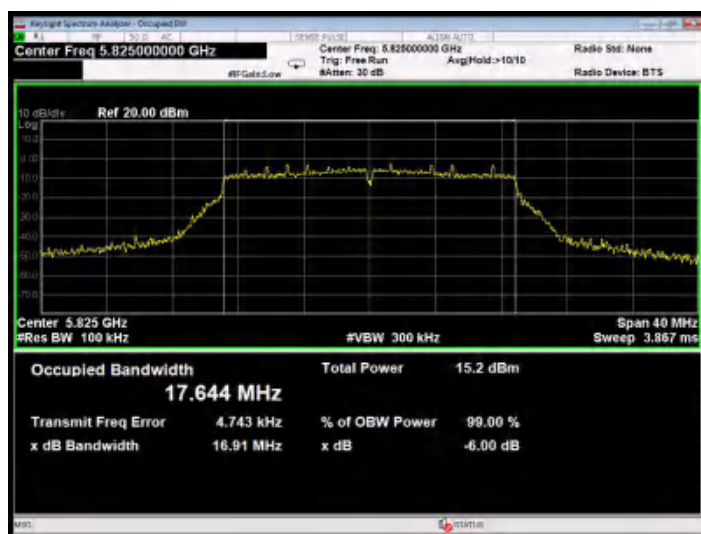


Test Mode: 802.11n20---High

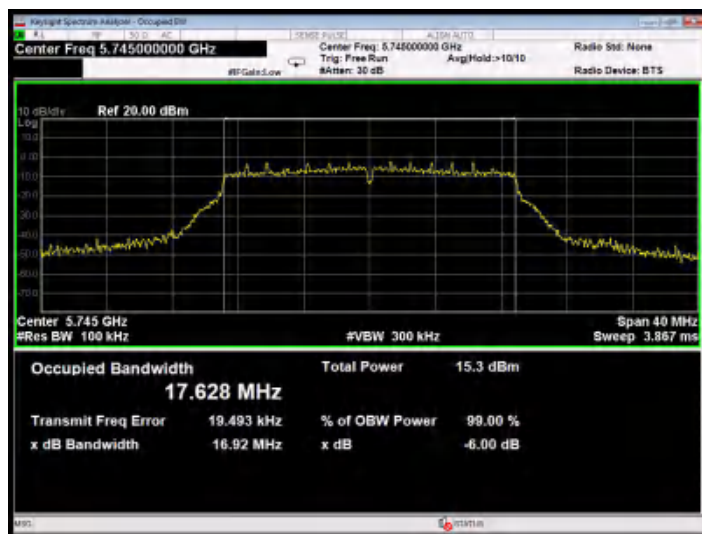


Test Mode: 802.11ac20--Low

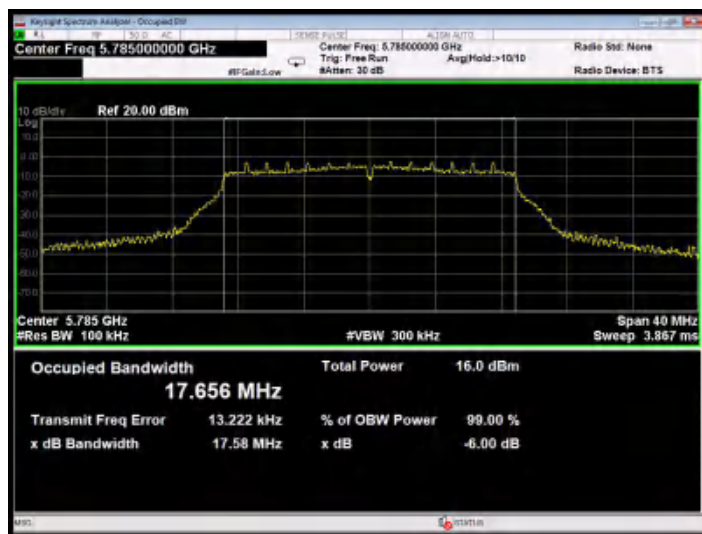


Test Mode: 802.11ac20---Middle

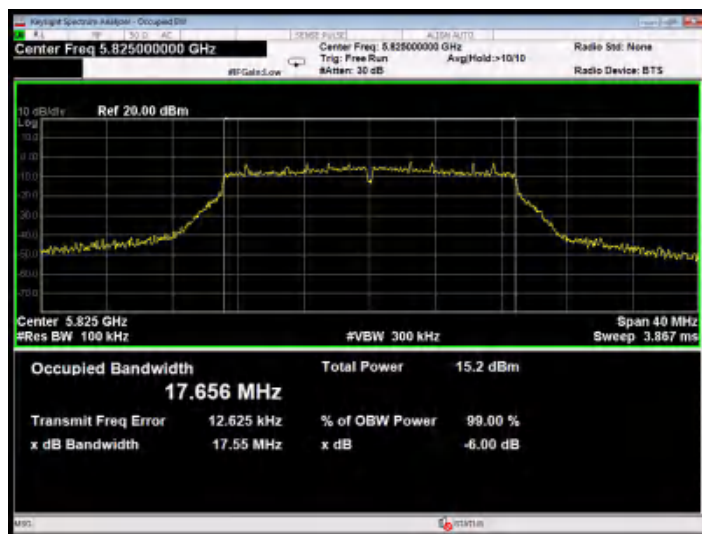


Test Mode: 802.11ac20---High

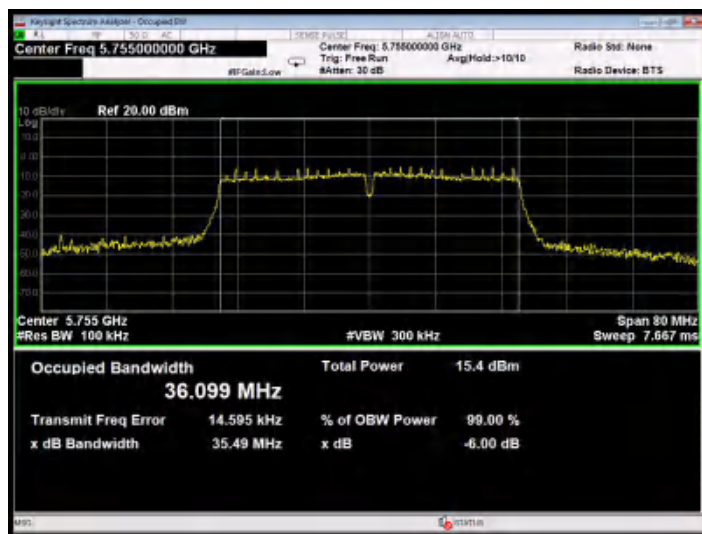


Test Mode: 802.11n40---Low

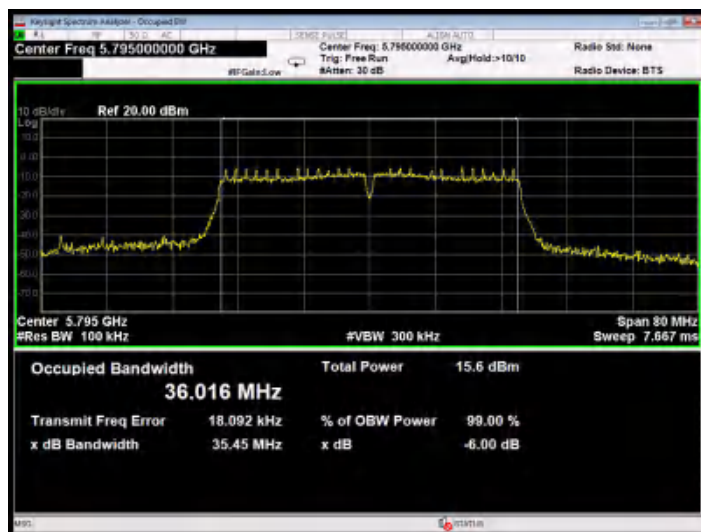


Test Mode: 802.11n40---High

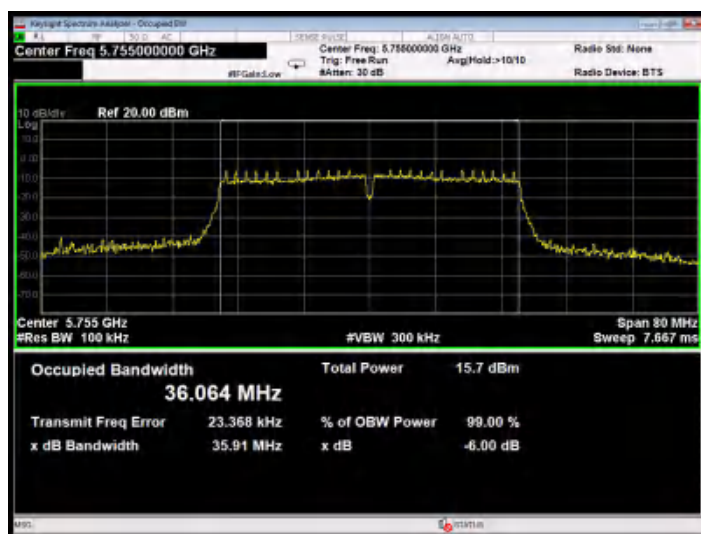

Test Mode: 802.11ac40---Low

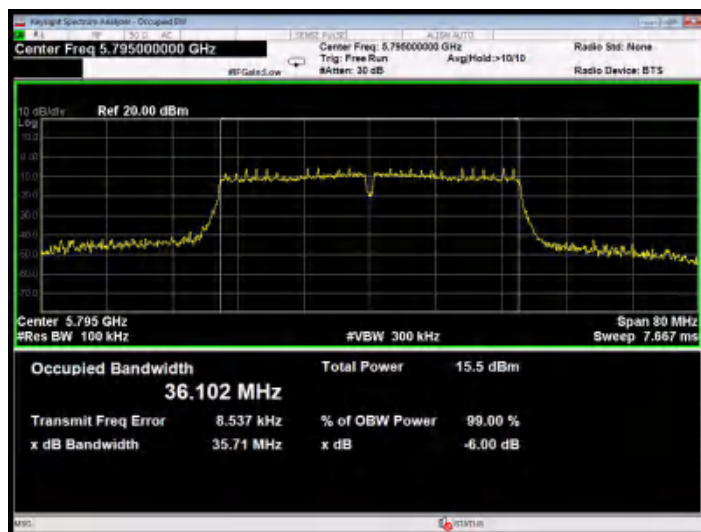


Test Mode: 802.11ac40---High

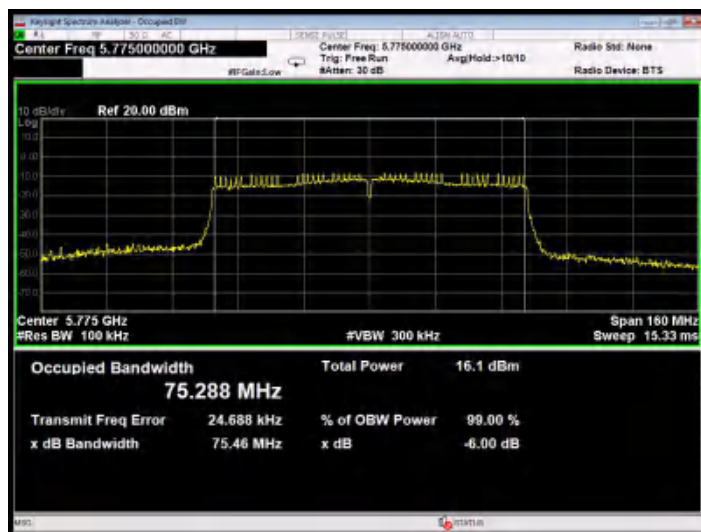


Test Mode: 802.11ac80



26dB & 99% Bandwidth

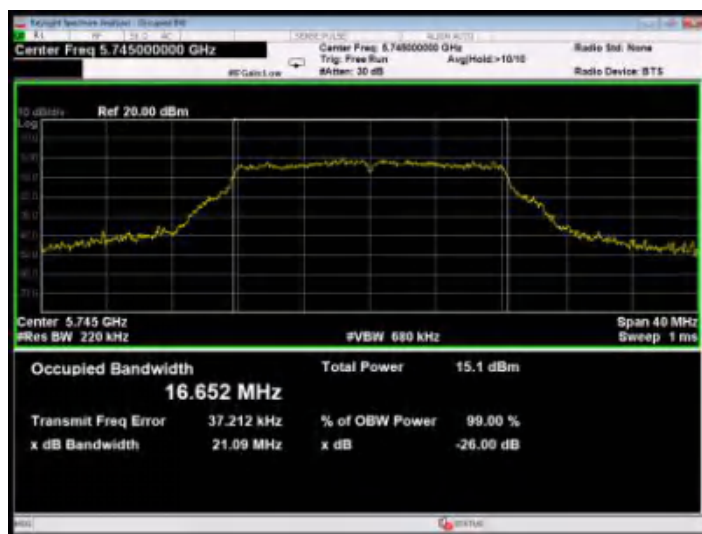


Test Mode: 802.11a--Low

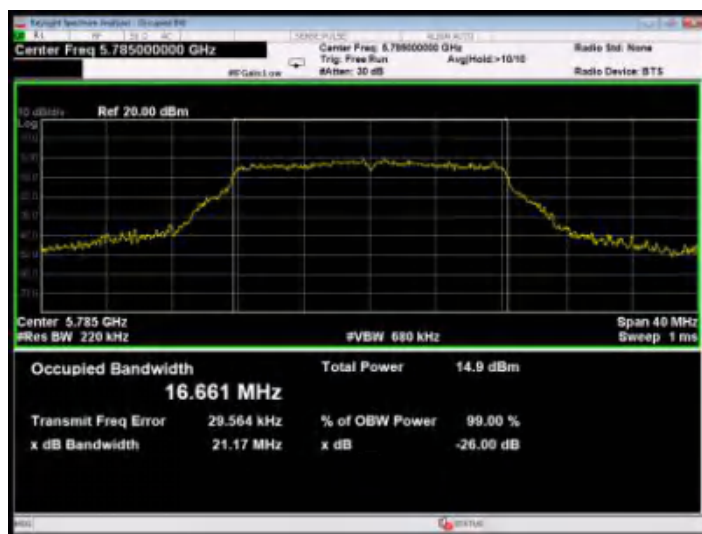

Test Mode: 802.11a---Middle




Test Mode: 802.11a---High

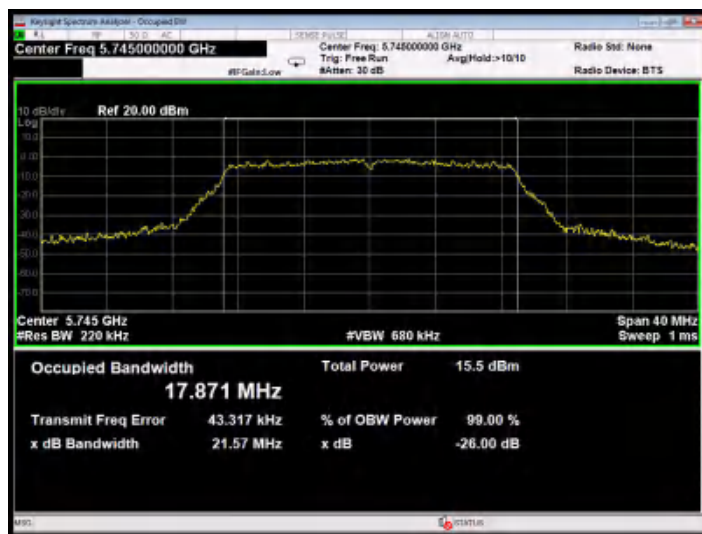


Test Mode: 802.11n20---Low




Test Mode: 802.11n20---Middle

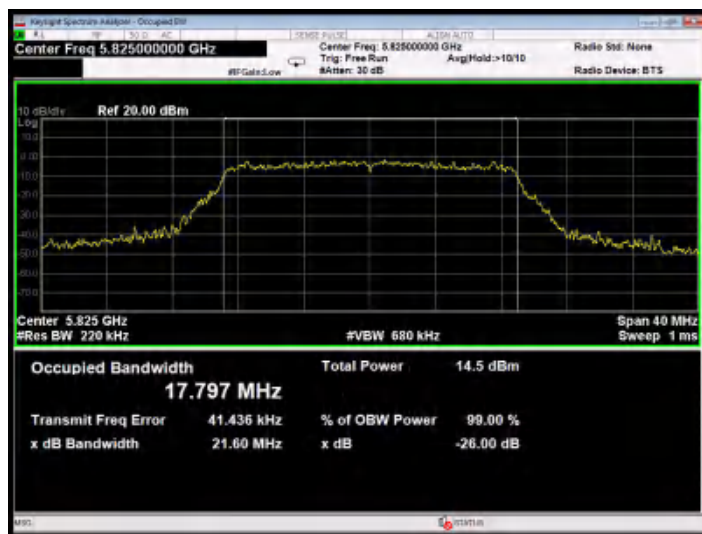

Test Mode: 802.11n20---High

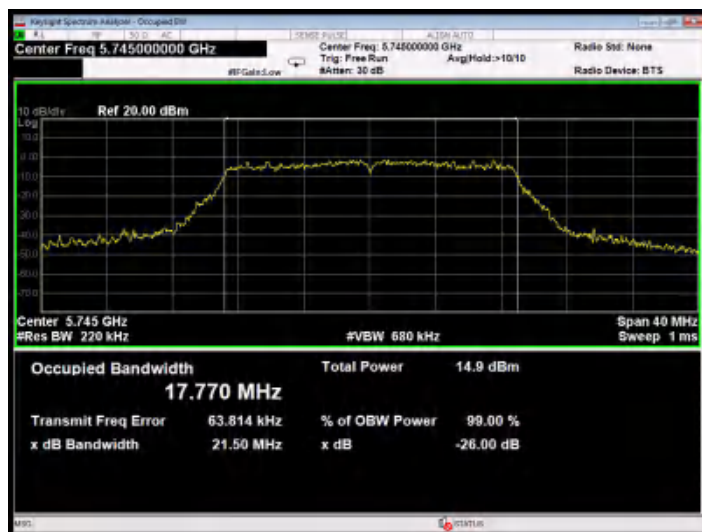


Test Mode: 802.11ac20--Low

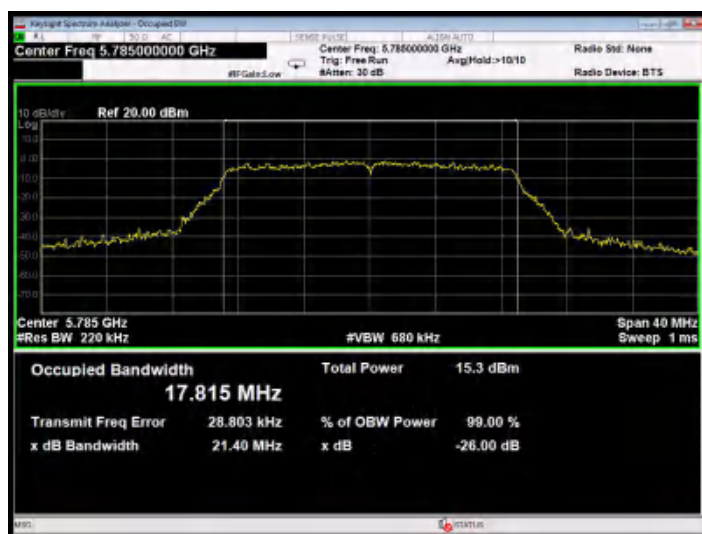

Test Mode: 802.11ac20---Middle




Test Mode: 802.11ac20---High

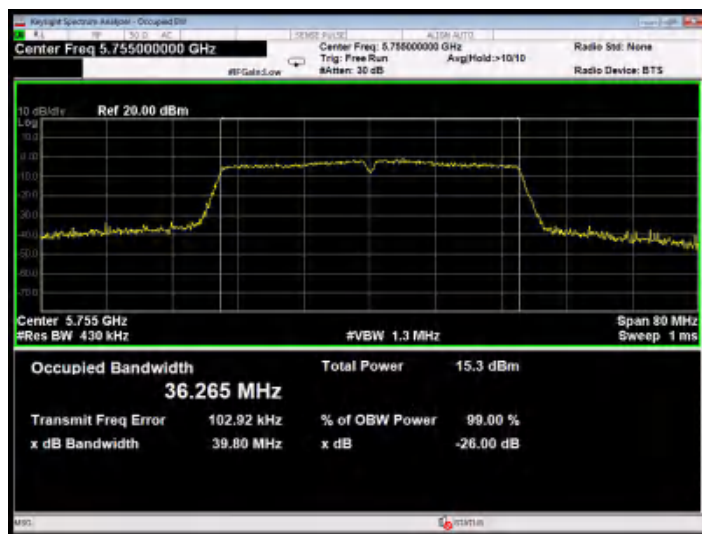


Test Mode: 802.11n40---Low



Test Mode: 802.11n40---High

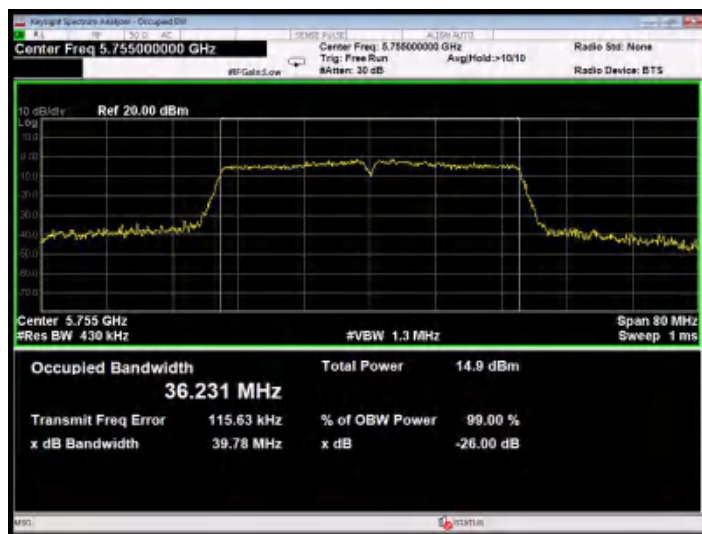

Test Mode: 802.11ac40---Low

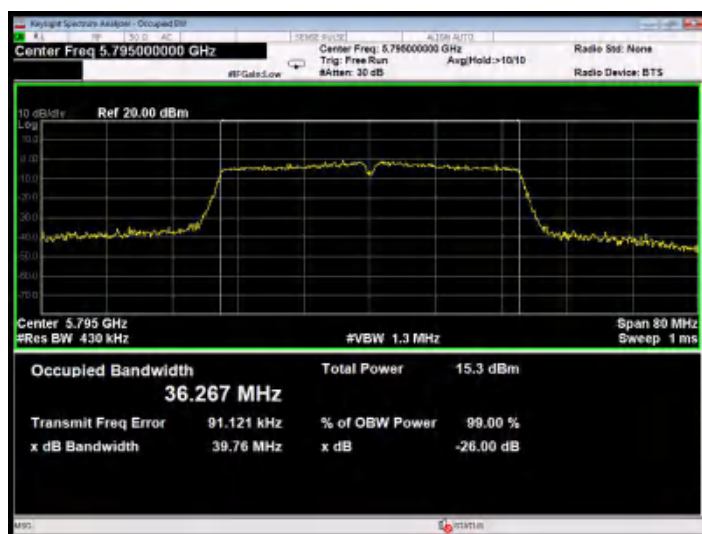

Test Mode: 802.11ac40---High



Test Mode: 802.11ac80



ANT B:


Mode	Channel Frequency (MHz)	6dB BW(MHz)	Limit	Results
802.11a	5745	15.17	>0.5MHz	PASS
	5785	14.42		PASS
	5825	14.09		PASS
802.11n20	5745	13.46		PASS
	5785	11.52		PASS
	5825	15.13		PASS
802.11ac20	5745	15.17		PASS
	5785	15.66		PASS
	5825	12.99		PASS
802.11n40	5755	32.62		PASS
	5795	35.18		PASS
802.11ac40	5755	32.57		PASS
	5795	31.45		PASS
802.11ac80	5775	75.34		PASS

Mode	Channel Frequency (MHz)	26dB BW(MHz)	99% Bandwidth (MHz)
802.11a	5745	22.53	16.479
	5785	21.92	16.473
	5825	22.35	16.509
802.11n20	5745	22.81	17.657
	5785	22.45	17.608
	5825	22.84	17.659
802.11ac20	5745	22.39	17.675




	5785	22.01	17.689
	5825	22.49	17.683
802.11n40	5755	41.06	36.087
	5795	41.27	36.112
802.11ac40	5755	41.07	36.057
	5795	41.16	36.067
802.11ac80	5775	80.84	75.378


6dB Bandwidth

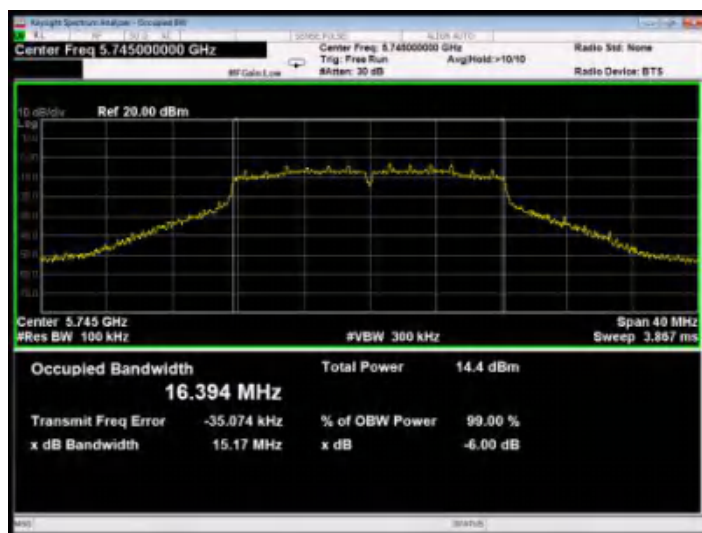


Test Mode: 802.11a--Low

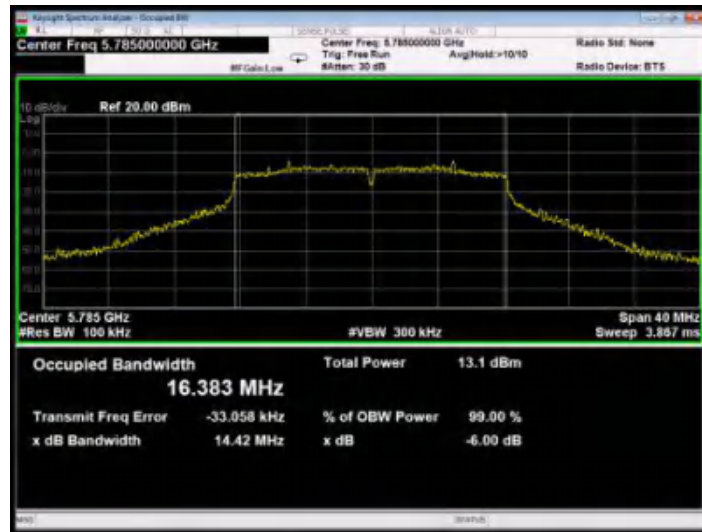


Test Mode: 802.11a---Middle

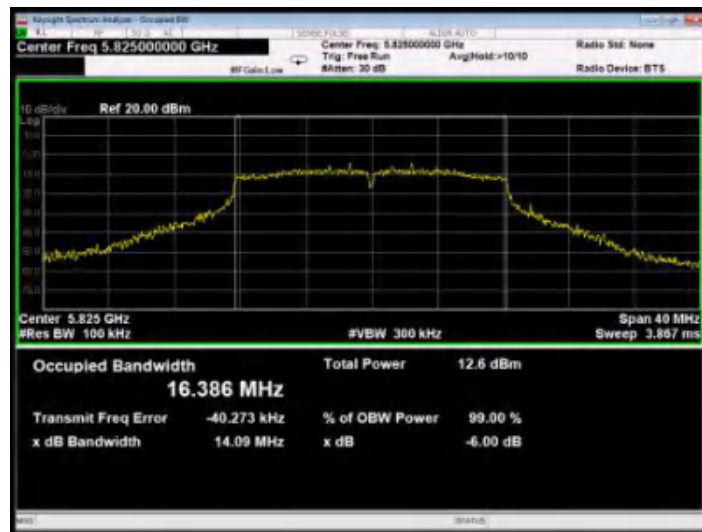


Test Mode: 802.11a---High

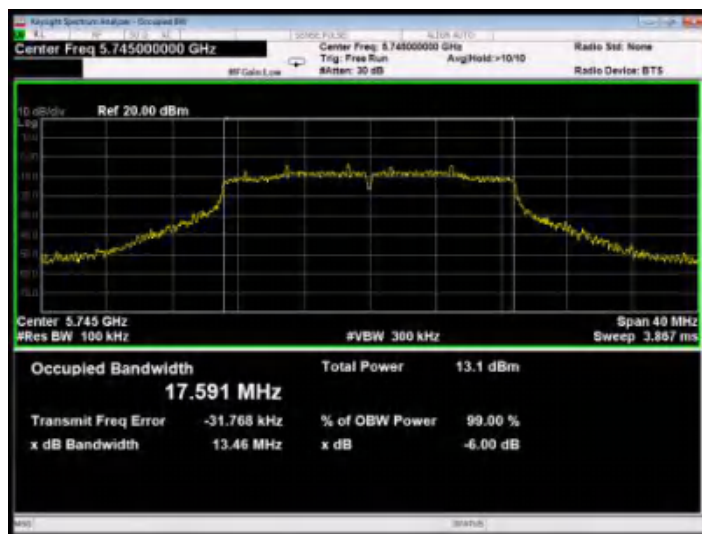


Test Mode: 802.11n20---Low

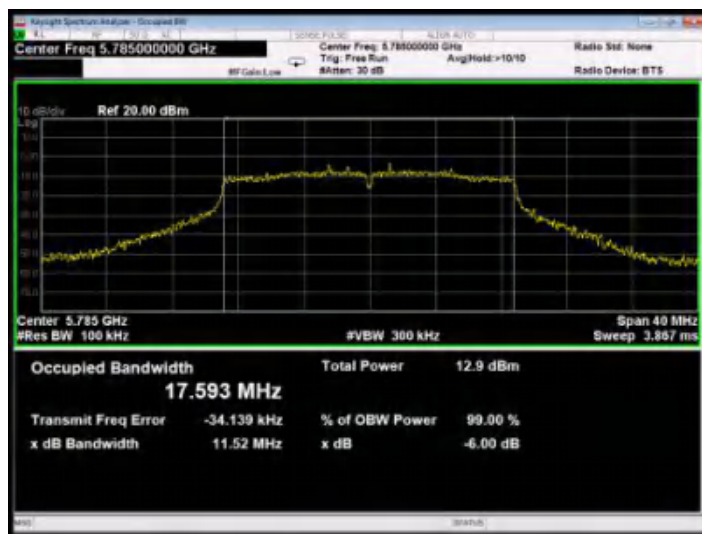


Test Mode: 802.11n20---Middle

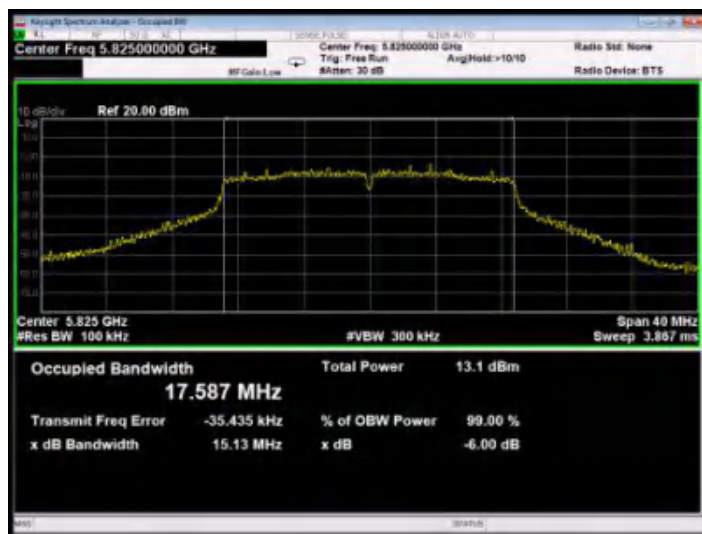


Test Mode: 802.11n20---High

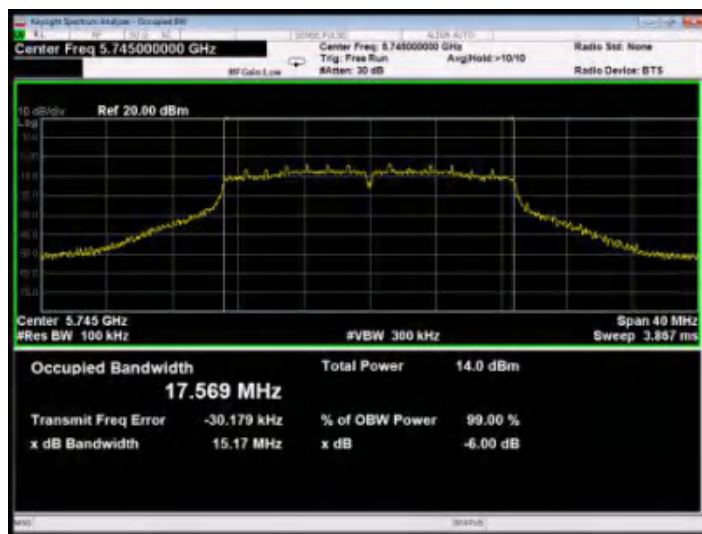


Test Mode: 802.11ac20--Low

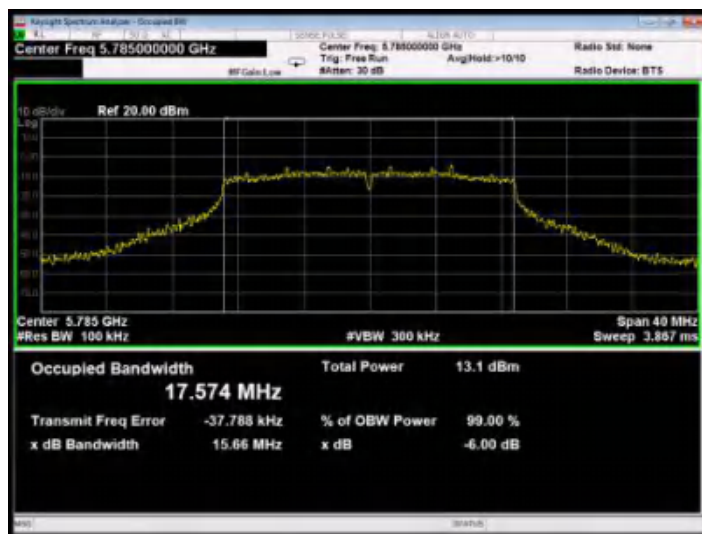


Test Mode: 802.11ac20---Middle

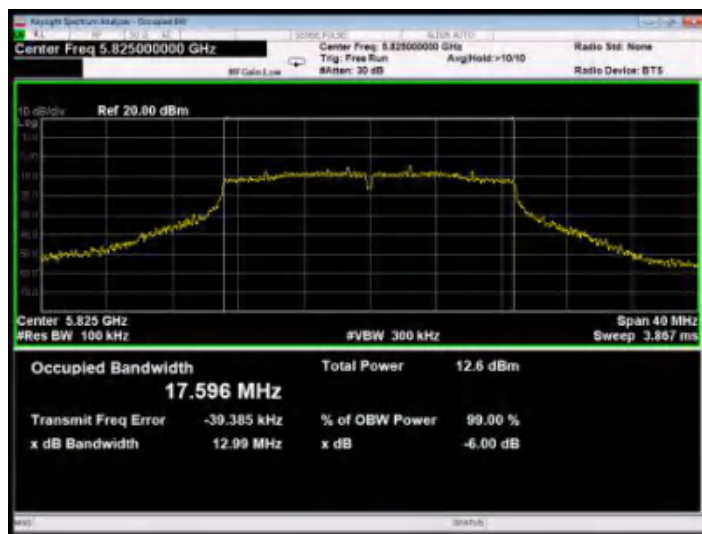


Test Mode: 802.11ac20---High

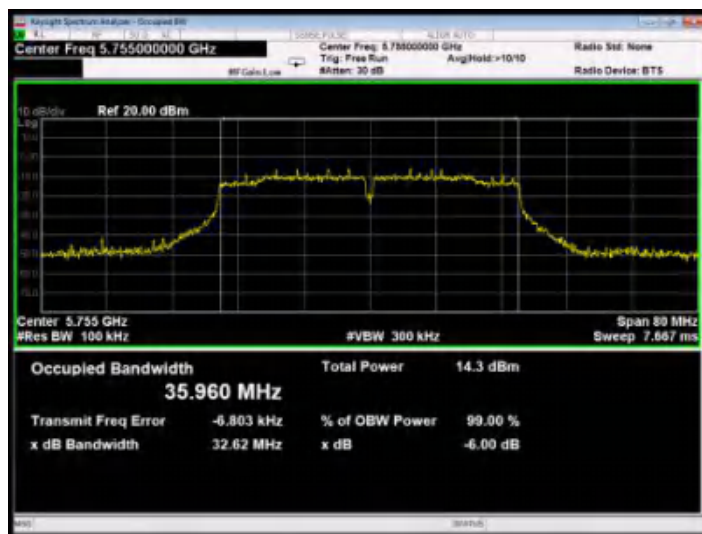


Test Mode: 802.11n40---Low

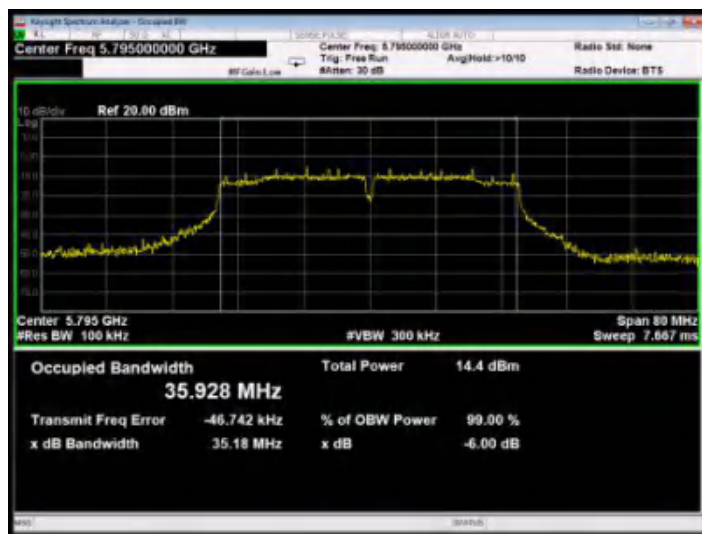


Test Mode: 802.11n40---High

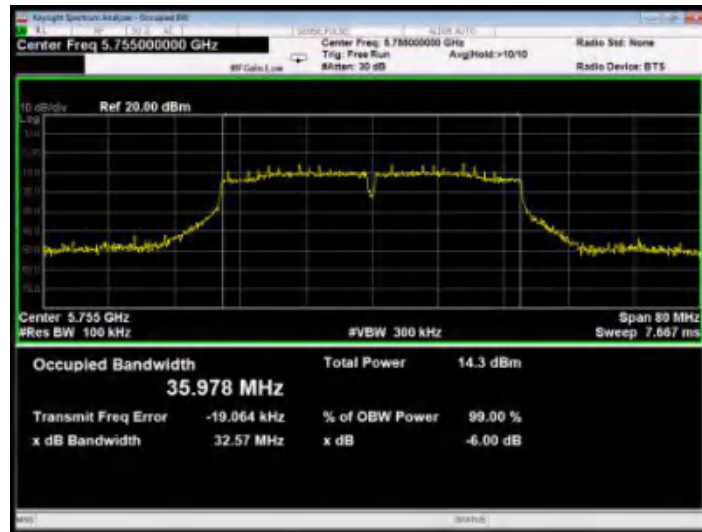

Test Mode: 802.11ac40---Low

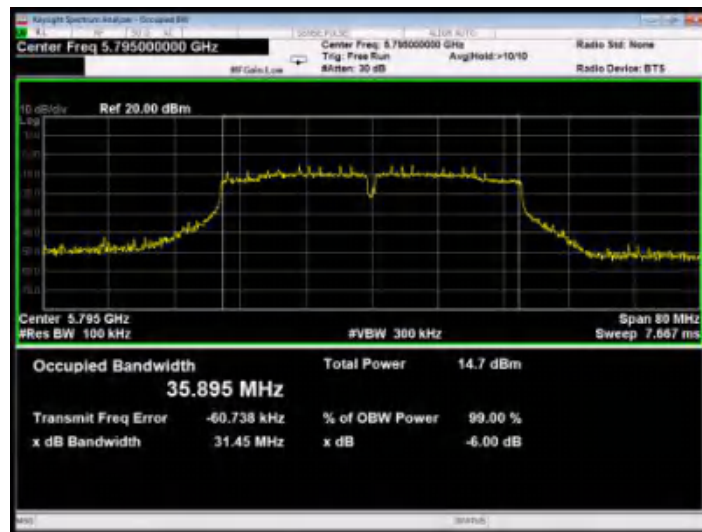


Test Mode: 802.11ac40---High

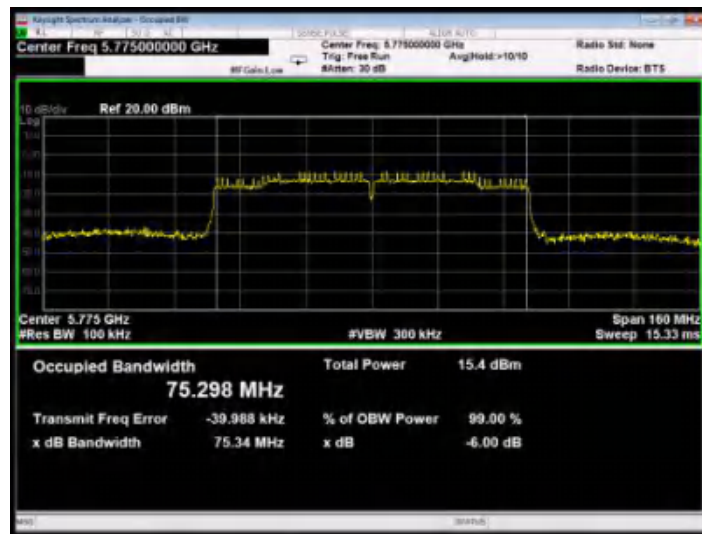


Test Mode: 802.11ac80


26dB & 99% Bandwidth

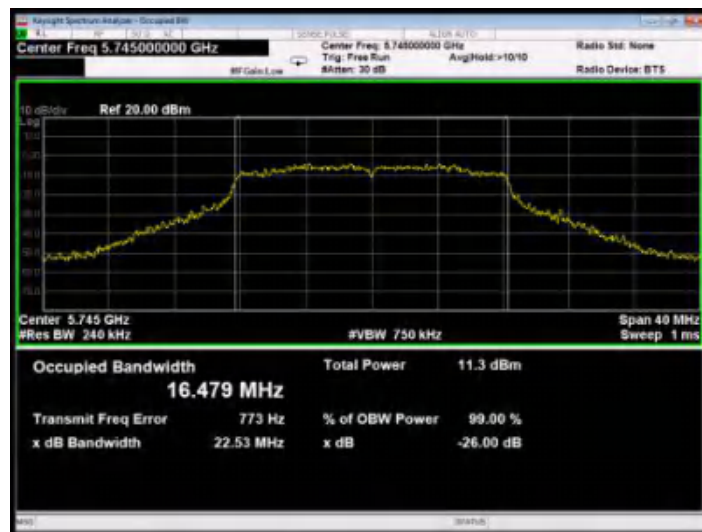

Test Mode: 802.11a--Low

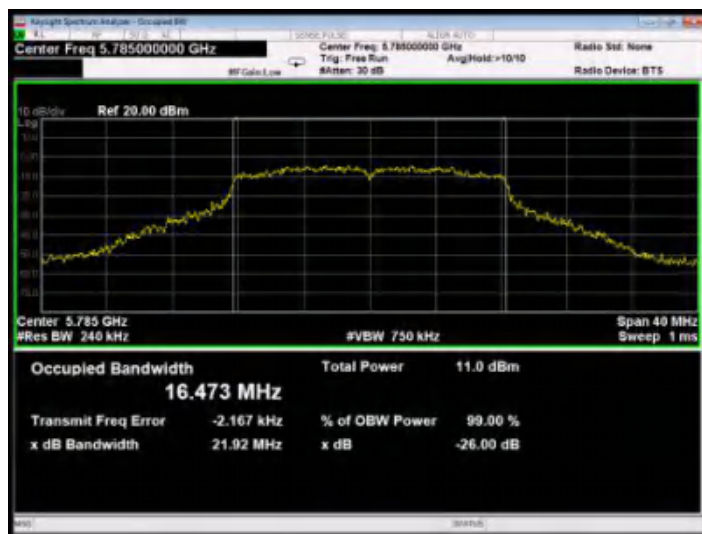


Test Mode: 802.11a---Middle

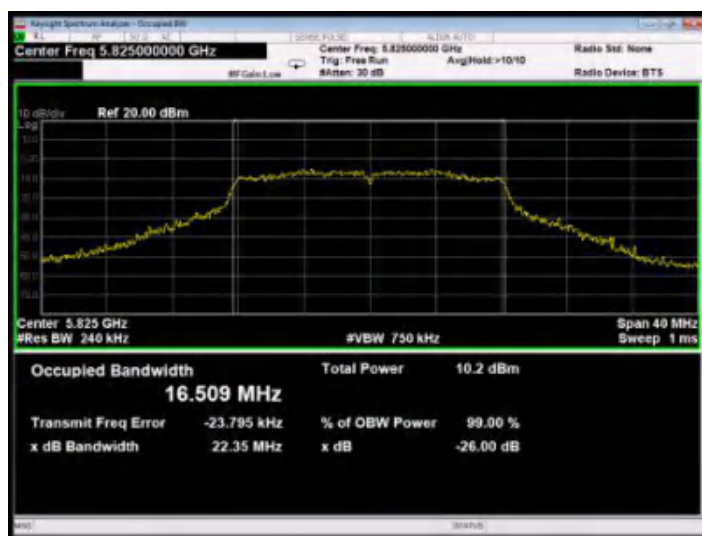

Test Mode: 802.11a---High




Test Mode: 802.11n20---Low

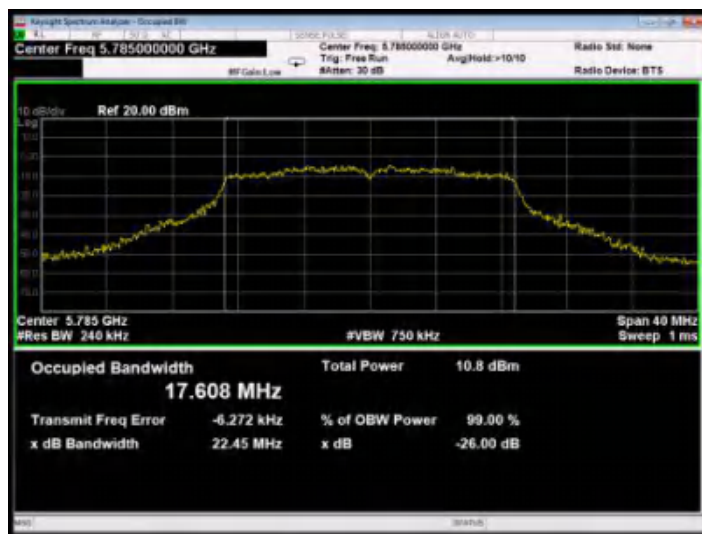


Test Mode: 802.11n20---Middle




Test Mode: 802.11n20---High

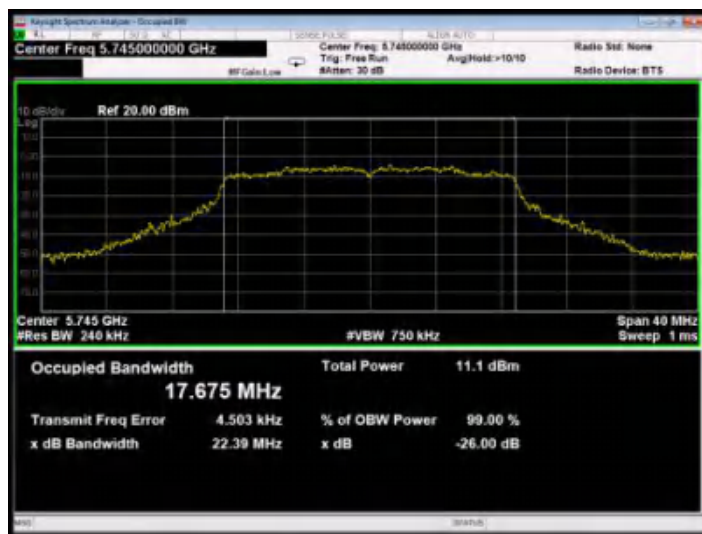


Test Mode: 802.11ac20--Low

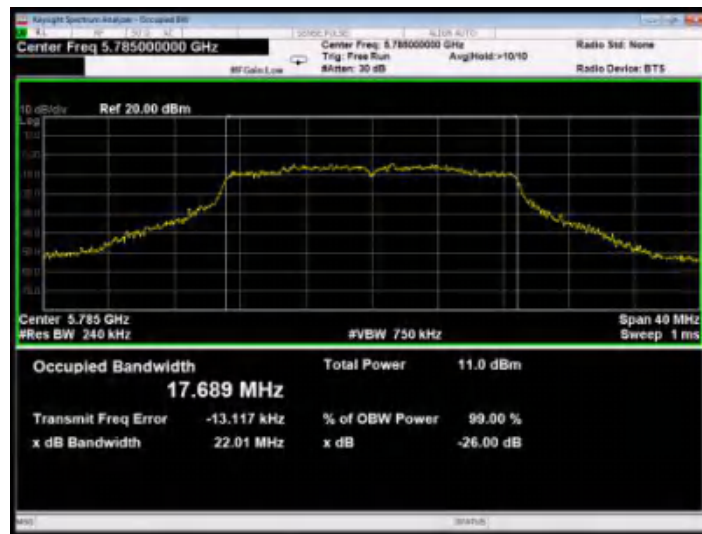


Test Mode: 802.11ac20---Middle

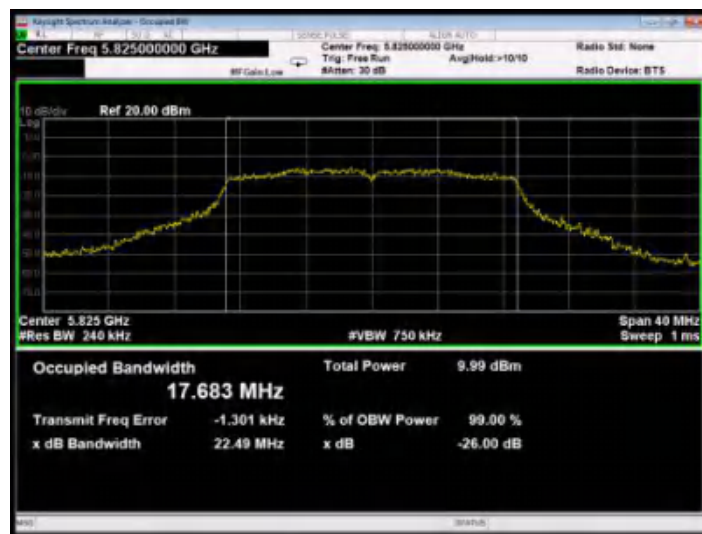


Test Mode: 802.11ac20---High

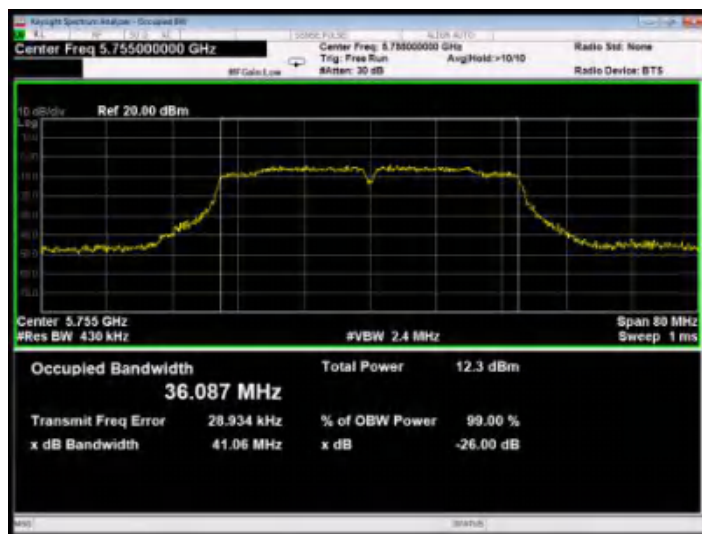


Test Mode: 802.11n40---Low

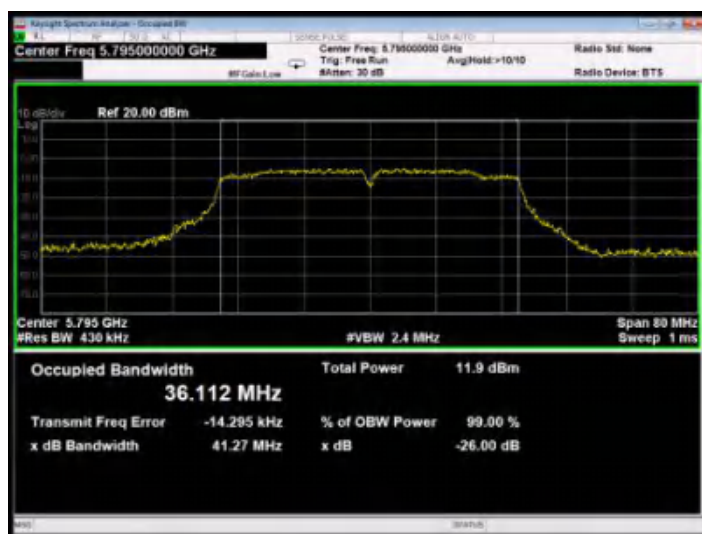

Test Mode: 802.11n40---High

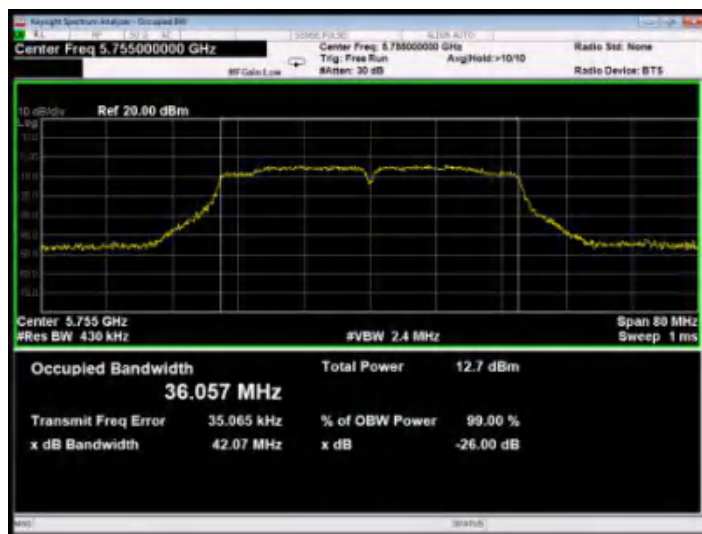


Test Mode: 802.11ac40---Low

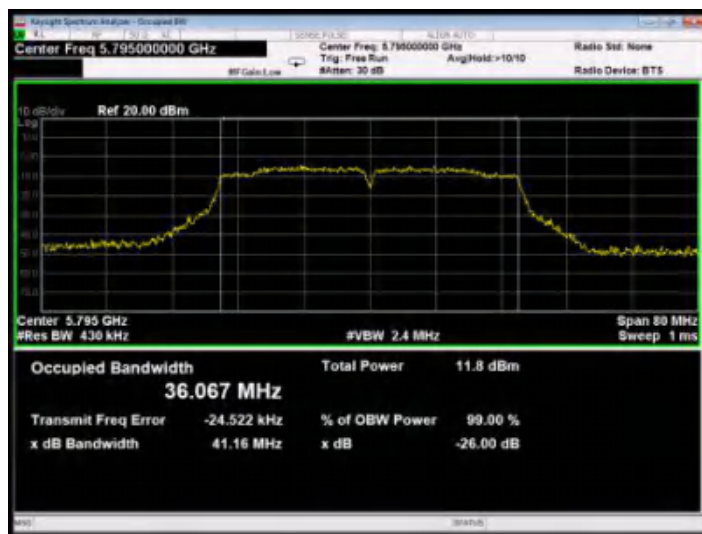

Test Mode: 802.11ac40---High



Report No.: PTC20090703102E-FC02

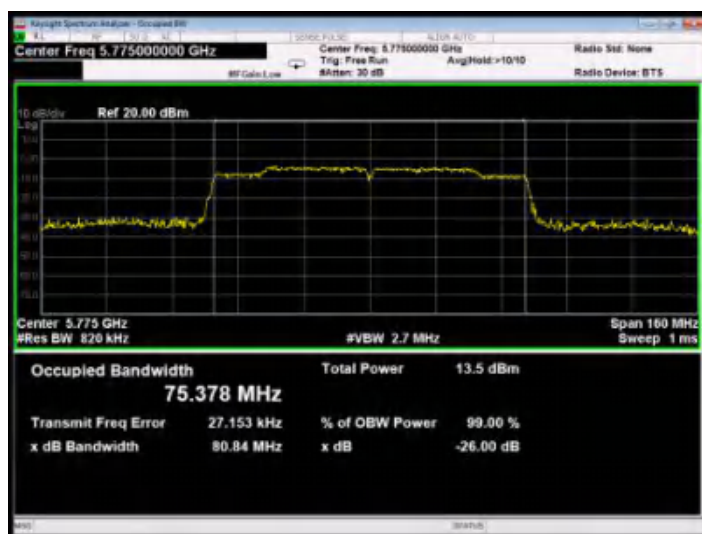

Test Mode: 802.11ac80




10 Power Spectral Density Test

10.1 Test Standard and Limit

Test Standard	FCC Part15 C Section 15.407 (a) (3)
Test Limit	30 dBm/500KHz

10.2 Test Setup



10.3 Test Procedure

For devices operating in the bands 5.15-5.25 GHz, 5.25-5.35 GHz, and 5.47-5.725 GHz, the above procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference bandwidth specified in § 15.407(a)(5). For devices operating in the band 5.725-5.85 GHz, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1 MHz, or 500 kHz, “provided that the measured power is integrated over the full reference bandwidth” to show the total power over the specified measurement bandwidth (i.e., 1 MHz, or 500 kHz).

1. The EUT is directly connected to the spectrum analyzer;
2. Set RBW =510KHz;
3. Set VBW $\geq$ 3 RBW=2MHz;
3. Set the span to encompass the entire emissions bandwidth (EBW) of the signal;
5. Detector=RMS;
6. Sweep time= auto couple;
7. Trace mode=max. hold;



10.4 Test Data

Test Item	: Power Spectral Density	Test Mode	: CH Low ~ CH High
Test Voltage	: DC 18.3V	Test Result	: PASS

ANT A:

Mode	Channel Frequency (MHz)	Test Power Spectral Density (dBm/510KHz)	Final Power Spectral Density (dBm/500KHz)	Limit	Results
802.11a	5745	-0.914	-1.000	30	PASS
	5785	-1.072	-1.158	30	PASS
	5825	-1.031	-1.117	30	PASS
802.11n20	5745	-2.163	-2.249	30	PASS
	5785	-1.630	-1.716	30	PASS
	5825	-1.667	-1.753	30	PASS
802.11ac20	5745	-1.621	-1.707	30	PASS
	5785	-1.579	-1.665	30	PASS
	5825	-1.702	-1.788	30	PASS
802.11n40	5755	-5.574	-5.660	30	PASS
	5795	-4.085	-4.171	30	PASS
802.11ac40	5755	-4.591	-4.677	30	PASS
	5795	-4.191	-4.277	30	PASS
802.11ac80	5775	-8.360	-8.446	30	PASS

Remark: Final Power Spectral Density=Test Power Spectral Density+10log10(500/510)



ANT B:

Mode	Channel Frequency (MHz)	Test Power Spectral Density (dBm/510KHz)	Final Power Spectral Density (dBm/500KHz)	Limit	Results
802.11a	5745	-1.058	-1.144	30	PASS
	5785	-2.431	-2.517	30	PASS
	5825	-2.246	-2.332	30	PASS
802.11n20	5745	-1.863	-1.949	30	PASS
	5785	-2.581	-2.667	30	PASS
	5825	-2.724	-2.810	30	PASS
802.11ac20	5745	-2.140	-2.226	30	PASS
	5785	-2.653	-2.739	30	PASS
	5825	-2.366	-2.452	30	PASS
802.11n40	5755	-4.491	-4.577	30	PASS
	5795	-4.723	-4.809	30	PASS
802.11ac40	5755	-5.087	-5.173	30	PASS
	5795	-4.695	-4.781	30	PASS
802.11ac80	5775	-7.999	-8.085	30	PASS

Remark: Final Power Spectral Density=Test Power Spectral Density+10log10(500/510)




ANT A+B:

Mode	Channel Frequency (MHz)	Final Power Spectral Density (dBm/510KHz)	Final Power Spectral Density (dBm/500KHz)	Limit	Results
802.11n20	5745	1.00	0.914	26.99	PASS
	5785	0.93	0.844	26.99	PASS
	5825	0.85	0.764	26.99	PASS
802.11ac20	5745	1.14	1.054	26.99	PASS
	5785	0.93	0.844	26.99	PASS
	5825	0.99	0.904	26.99	PASS
802.11n40	5755	-1.99	-2.076	26.99	PASS
	5795	-1.38	-1.466	26.99	PASS
802.11ac40	5755	-1.82	-1.906	26.99	PASS
	5795	-1.43	-1.516	26.99	PASS
802.11ac80	5775	-5.17	-5.256	26.99	PASS


Remark: Final Power Spectral Density=Test Power Spectral Density+10log10(500/510)




ANT A

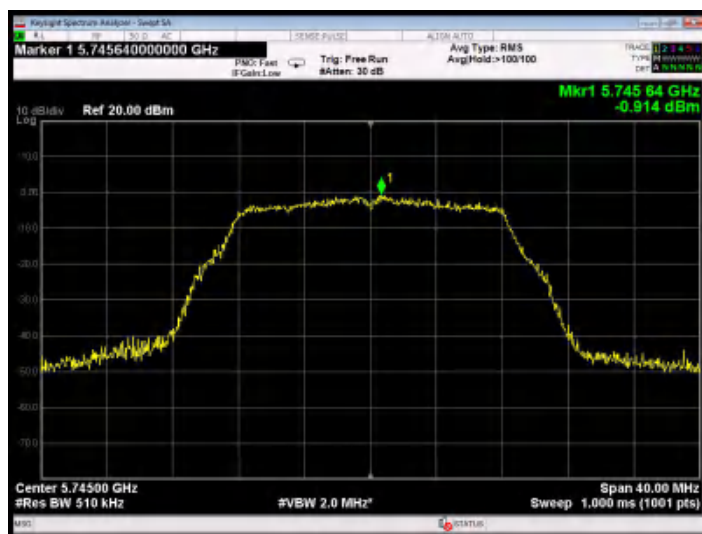


Test Mode: 802.11a--Low

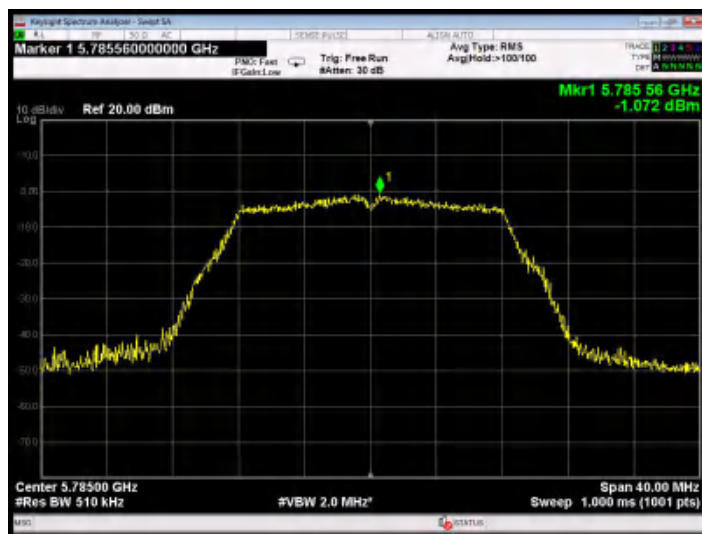


Test Mode: 802.11a---Middle

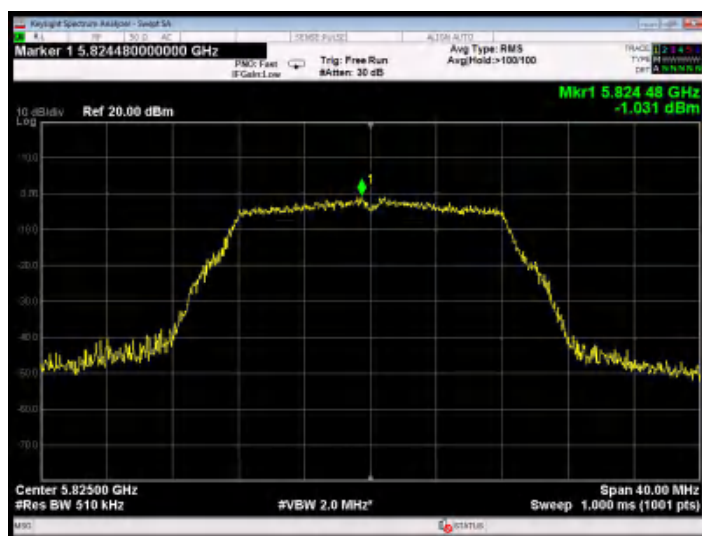


Test Mode: 802.11a---High

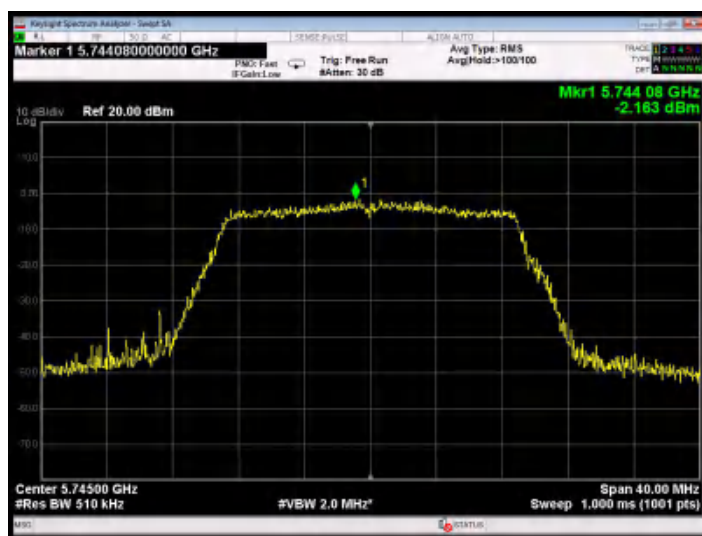


Test Mode: 802.11n20---Low

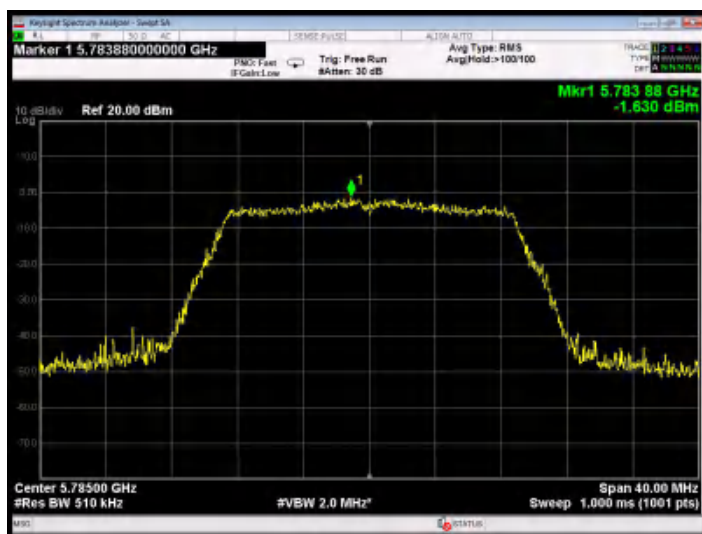


Test Mode: 802.11n20---Middle

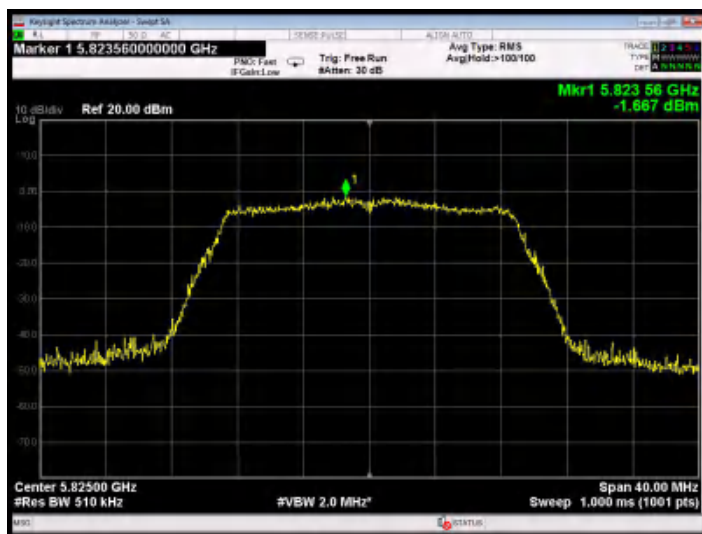


Test Mode: 802.11n20---High

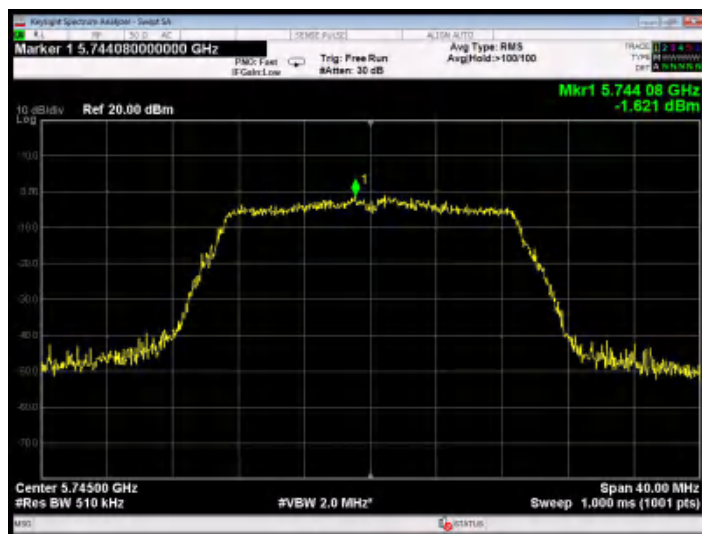


Test Mode: 802.11ac20--Low

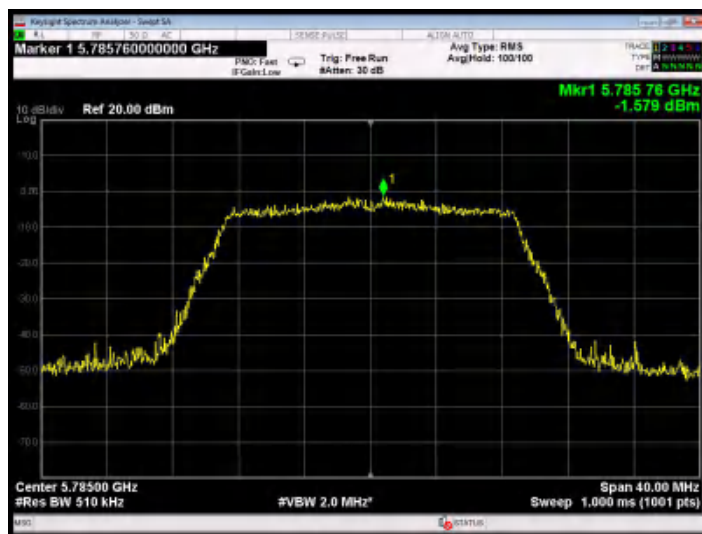


Test Mode: 802.11ac20---Middle

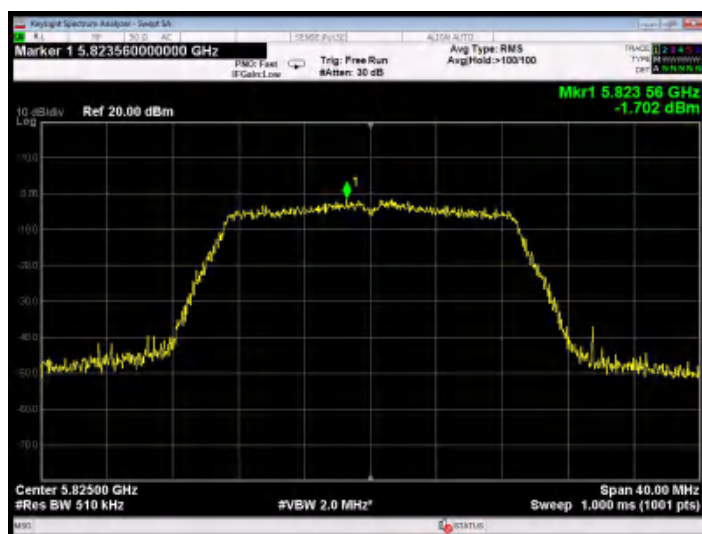


Test Mode: 802.11ac20---High

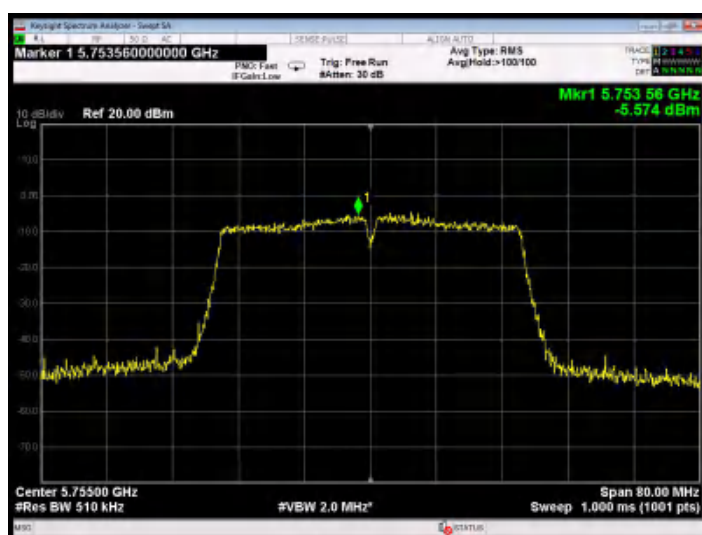


Test Mode: 802.11n40---Low

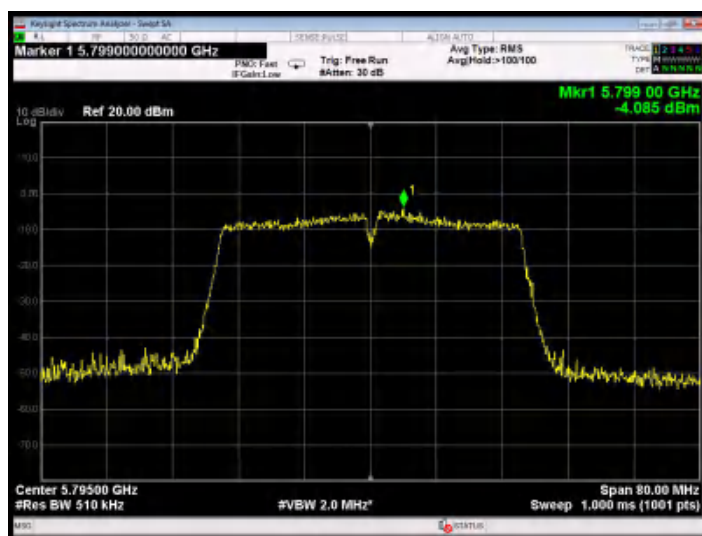


Test Mode: 802.11n40---High

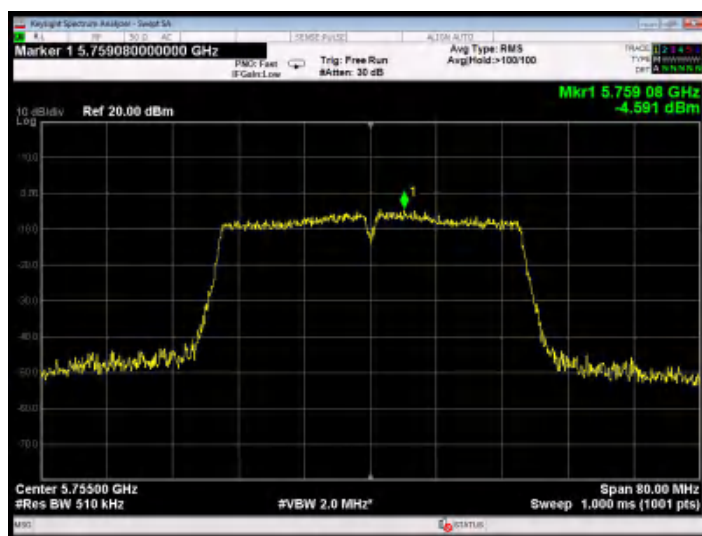

Test Mode: 802.11ac40---Low

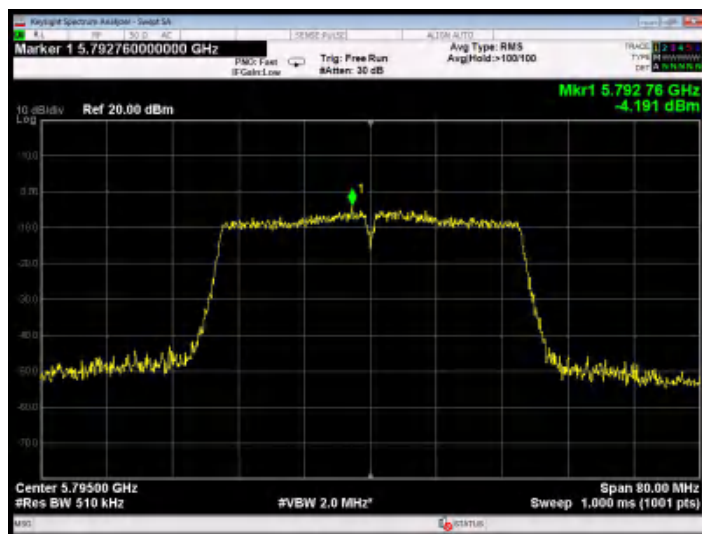


Test Mode: 802.11ac40---High

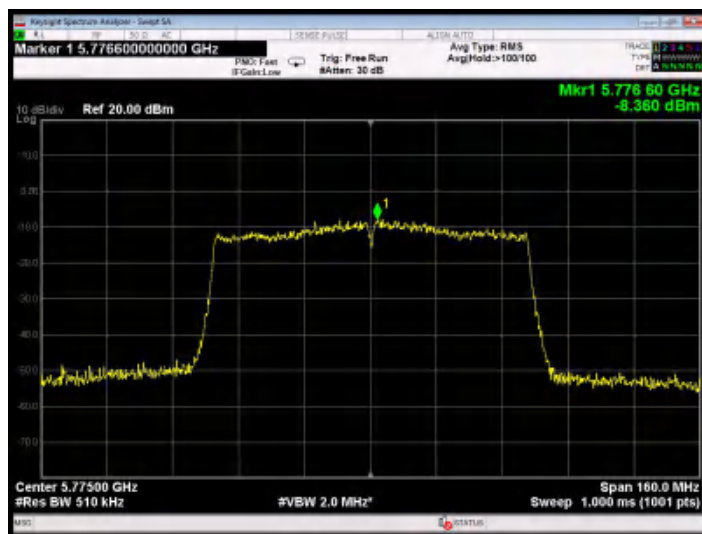


Test Mode: 802.11ac80




ANT B

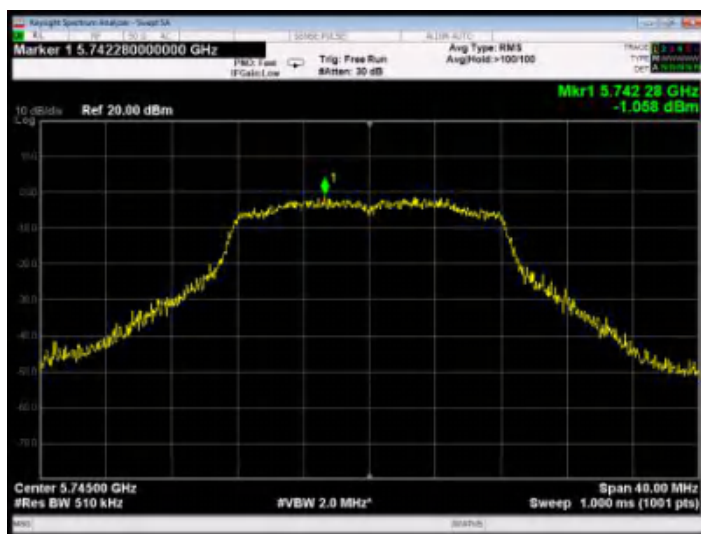


Test Mode: 802.11a--Low

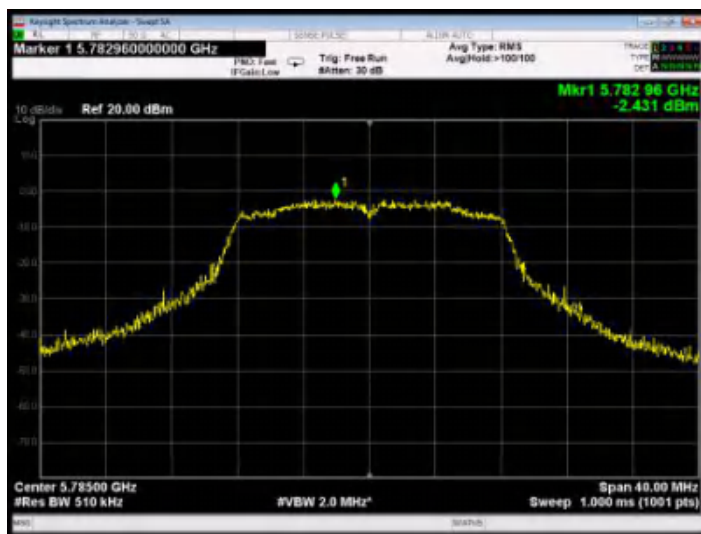


Test Mode: 802.11a---Middle

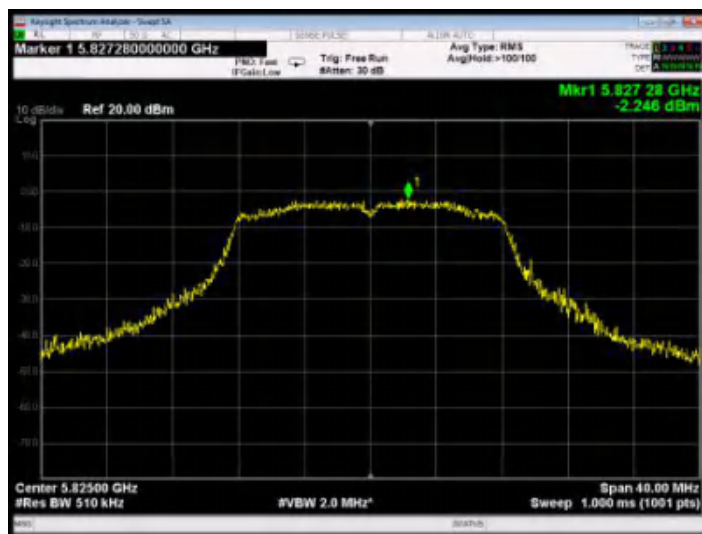


Test Mode: 802.11a---High

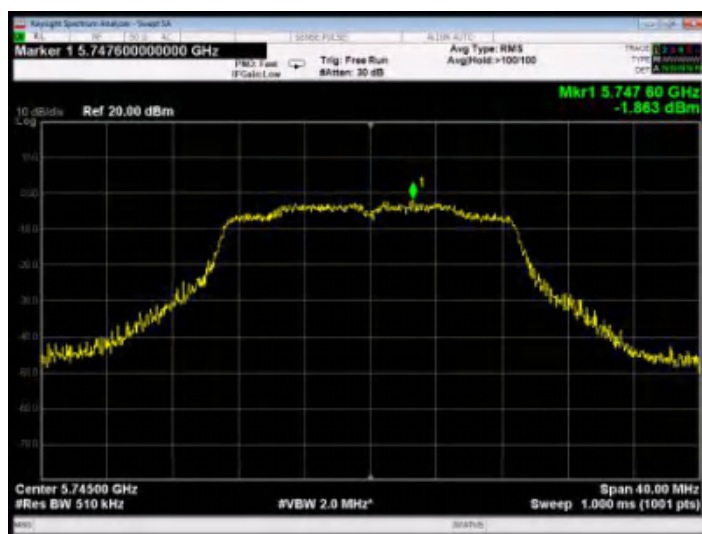


Test Mode: 802.11n20---Low

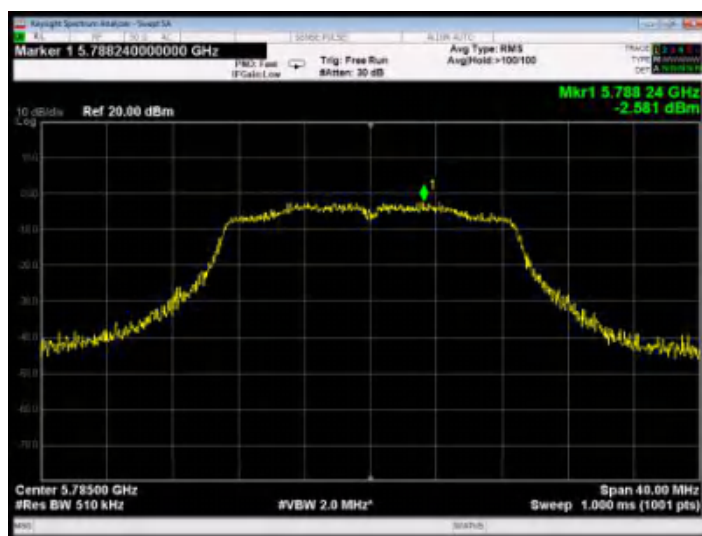


Test Mode: 802.11n20---Middle

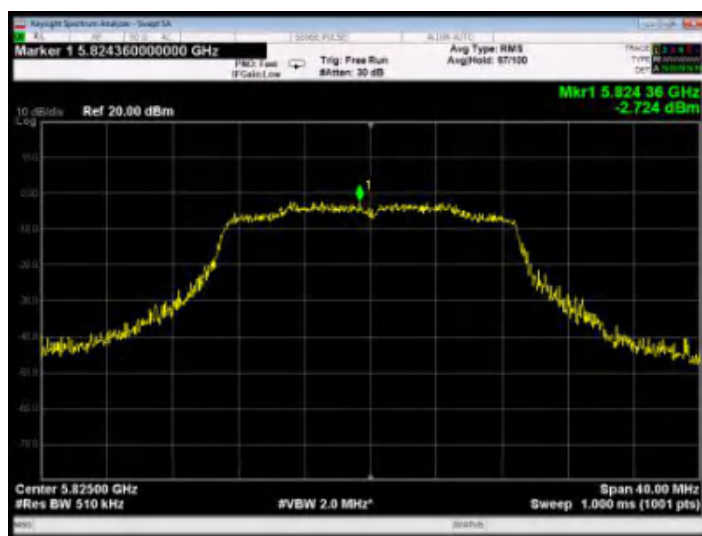


Test Mode: 802.11n20---High

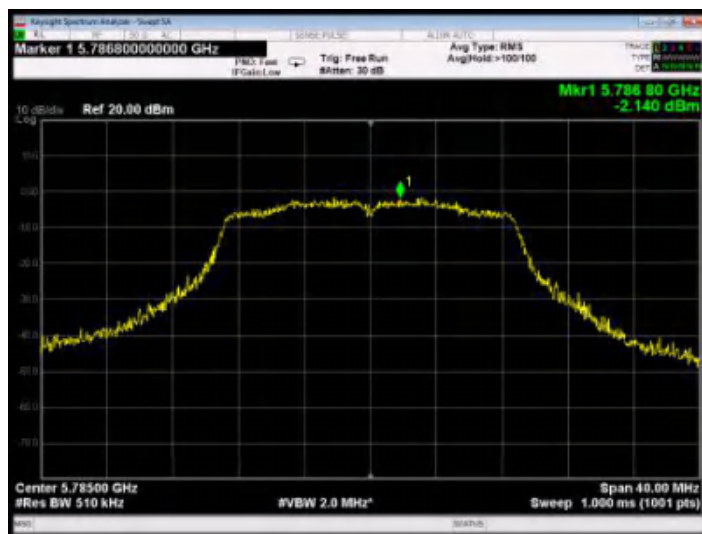


Test Mode: 802.11ac20--Low

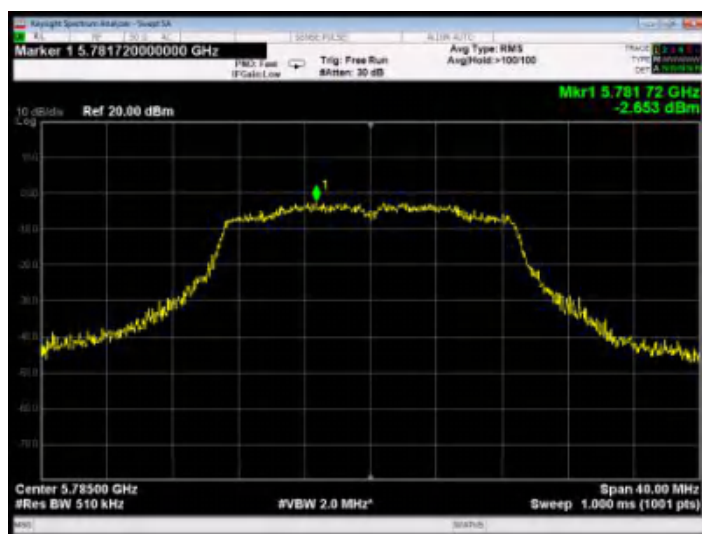


Test Mode: 802.11ac20---Middle

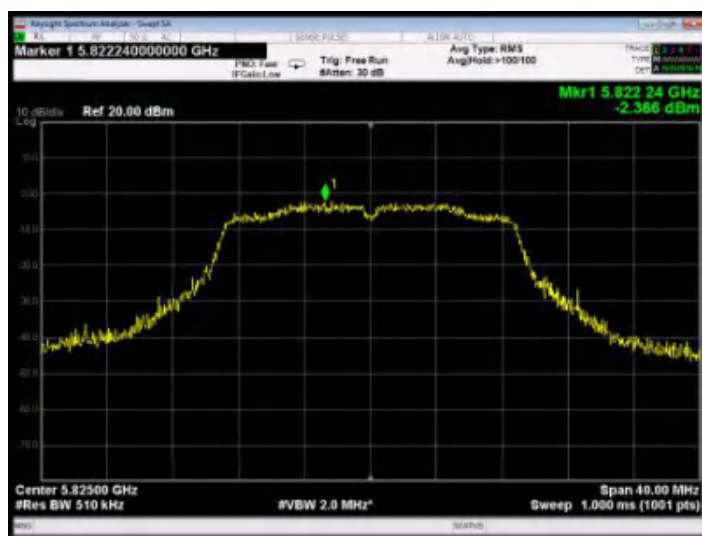


Test Mode: 802.11ac20---High

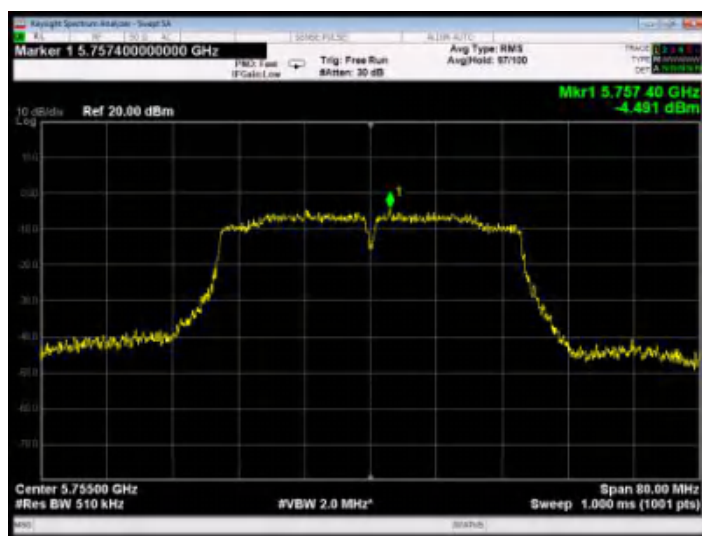


Test Mode: 802.11n40---Low

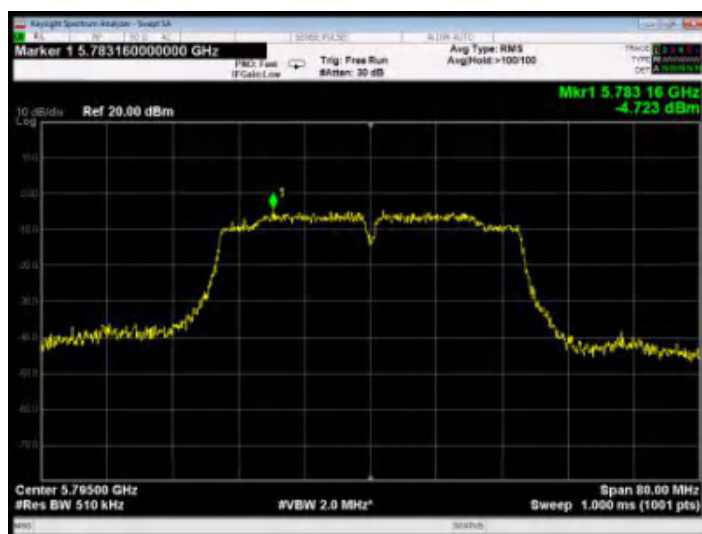

Test Mode: 802.11n40---High

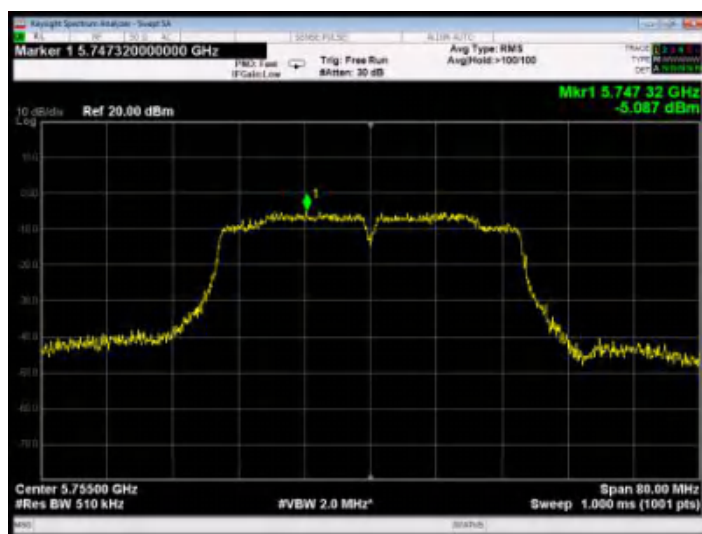

Test Mode: 802.11ac40---Low

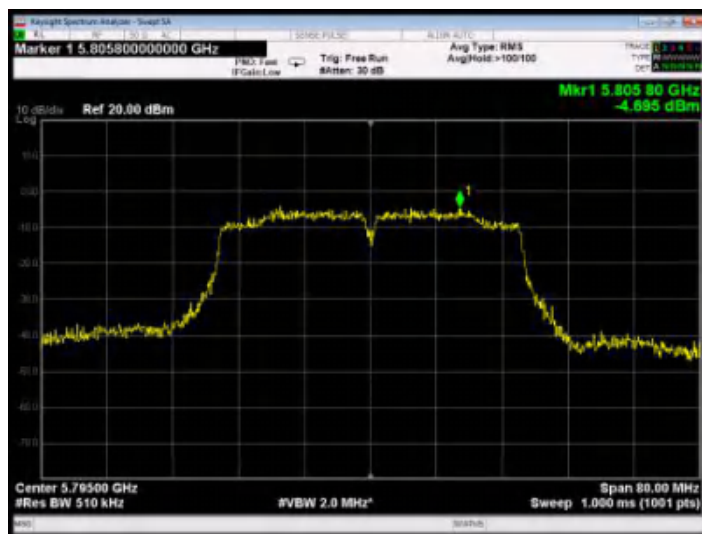

Test Mode: 802.11ac40---High



Test Mode: 802.11ac80



11 Antenna Requirement

11.1 Test Standard and Requirement


Test Standard	FCC Part15 Section 15.203 /15.407
Requirement	1) 15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 2) 15.407 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

11.2 Antenna Connected Construction

The antenna is a columnar antenna which permanently attached, and the best case gain of the antenna is 6 dBi. It complies with the standard requirement.

WIFI Antenna A

WIFI Antenna B

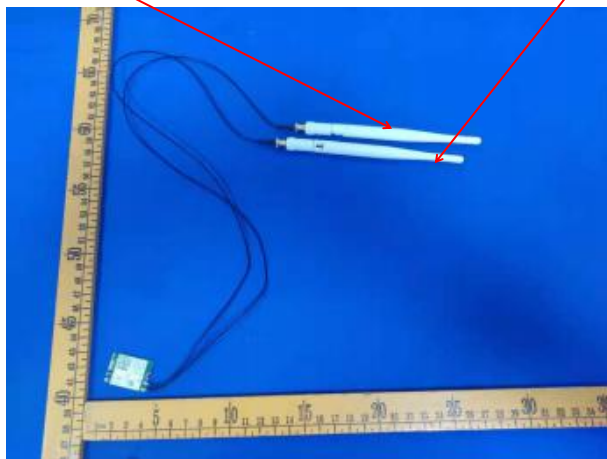



Report No.: PTC20090703102E-FC02





Report No.: PTC20090703102E-FC02

APPENDIX I -- TEST SETUP PHOTOGRAPH

Reference to the test report PTC20090703102E-FC01

----- End of Report -----