



BUREAU
VERITAS

Test Report No.: RF2211WDG0097



Certificate # 2951.01

TEST REPORT

Applicant:	HANDAN CITY JIANERLE TOY CO.,LTD
Address:	Economic Development Zone, Quzhou County, Handan City, Hebei Province, China

Manufacturer or Supplier	HANDAN CITY JIANERLE TOY CO.,LTD
Address	Economic Development Zone, Quzhou County, Handan City, Hebei Province, China
Product:	Battery Operated Children Car
Brand Name:	N/A
Model:	NEL-6688
Additional Models & Model Difference	NEL-903, NEL-918, NEL-007, NEL-900, NEL-601, NEL-118, NEL-797A, NEL-797B, NEL-803, see item 3.1
Date of tests:	Nov. 11, 2022 ~ Nov. 17, 2022

the tests have been carried out according to the requirements of the following standard:

FCC Part 15, Subpart C, Section 15.249

CONCLUSION: The submitted sample was found to COMPLY with the test requirement

Tested by Eric Fang Project Engineer / EMC Department	Approved by Glyn He Assistant Manager / EMC Department

Date: Dec. 26, 2022

This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.



BUREAU
VERITAS

Test Report No.: RF2211WDG0097

TABLE OF CONTENTS

RELEASE CONTROL RECORD	3
1 SUMMARY OF TEST RESULTS.....	4
2 MEASUREMENT UNCERTAINTY	4
3 GENERAL INFORMATION	5
3.1 GENERAL DESCRIPTION OF EUT	5
3.2 DESCRIPTION OF TEST MODES.....	6
3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS	8
3.4 DESCRIPTION OF SUPPORT UNITS	8
4. TEST TYPES AND RESULTS.....	9
4.1 RADIATED EMISSION MEASUREMENT.....	9
4.1.1 LIMITS OF RADIATED EMISSION MEASUREMENT	9
4.1.2 TEST INSTRUMENTS.....	10
4.1.3 TEST PROCEDURES	11
4.1.4 DEVIATION FROM TEST STANDARD	11
4.1.5 TEST SETUP.....	12
4.1.6 EUT OPERATING CONDITIONS	13
4.1.7 TEST RESULTS	14
4.2 20dB BANDWIDTH MEASUREMENT	22
4.2.1 LIMITS OF 20dB BANDWIDTH MEASUREMENT	22
4.2.2 TEST INSTRUMENTS	22
4.2.3 TEST PROCEDURE	23
4.2.4 DEVIATION FROM TEST STANDARD.....	23
4.2.5 TEST SETUP	23
4.2.6 EUT OPERATING CONDITIONS	23
4.2.7 TEST RESULTS	24
5. PHOTOGRAPHS OF THE TEST CONFIGURATION.....	26
6. APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB.....	27



BUREAU
VERITAS

Test Report No.: RF2211WDG0097

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF2211WDG0097	Original release	Dec. 26, 2022



BUREAU
VERITAS

Test Report No.: RF2211WDG0097

1 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC PART 15, SUBPART C (SECTION 15.249)			
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT	REMARK
§15.203	Antenna Requirement	PASS	No antenna connector is used
§15.207 (a)	Conducted Emission	N/A	Powered from battery
§15.205	Restricted Band of Operation	PASS	Compliant
§15.209 §15.249(a)	Radiated Emission	PASS	Compliant
§15.215(c)	20dB Bandwidth Test	PASS	Compliant

2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Radiated emissions	9KHz ~ 30MHz	2.16dB
	30MHz ~ 1GHz	3.63dB
	1GHz ~ 18GHz	4.96dB
	18GHz ~ 40GHz	4.37dB
	20dB Bandwidth	1.132x10 ⁻⁴ %

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k = 2.



BUREAU
VERITAS

Test Report No.: RF2211WDG0097

3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	Battery Operated Children Car
MODEL NO.	NEL-6688
ADDITIONAL MODELS	NEL-903, NEL-918, NEL-007, NEL-900, NEL-601, NEL-118, NEL-797A, NEL-797B, NEL-803
FCC ID	2A2AAZH198520221206
NOMINAL VOLTAGE	DC 3V (1.5V AAA Size*3) from battery
MODULATION TECHNOLOGY	GFSK
OPERATING FREQUENCY	2405-2479MHz
ANTENNA TYPE	PCB Antenna, with 0dBi gain
I/O PORTS	Refer to user's manual
CABLE SUPPLIED	N/A

NOTES:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
2. For the test results, the EUT had been tested with all conditions, but only the worst case was shown in test report.
3. Please refer to the EUT photo document (Reference No.: 2211WDG0097) for detailed product photo.
4. Additional models (See above table) are identical with test model NEL-6688 except the appearance and model no. for trading purpose.



BUREAU
VERITAS

Test Report No.: RF2211WDG0097

3.2 DESCRIPTION OF TEST MODES

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and packet type. The worst case was found when the EUT was positioned on Y axis for radiated emission. The EUT was tested under the following mode.

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE<1G	RE≥1G	PLC	BW	
A	√	√	-	√	DC 3.0V from New Battery

Where

RE<1G: Radiated Emission below 1GHz
PLC: Power Line Conducted Emission

RE≥1G: Radiated Emission above 1GHz
BW: 20db bandwidth

NOTE: No need to concern of Conducted Emission due to the EUT is powered by battery.

Following channel(s) was (were) selected for the test as listed below.

TESTED CHANNEL	TESTED FREQUENCY
Low	2405 MHz
Middle	2440 MHz
High	2479 MHz



BUREAU
VERITAS

Test Report No.: RF2211WDG0097

Channel List

Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
1	2405	27	2431	53	2457
2	2406	28	2432	54	2458
3	2407	29	2433	55	2459
4	2408	30	2434	56	2460
5	2409	31	2435	57	2461
6	2410	32	2436	58	2462
7	2411	33	2437	59	2463
8	2412	34	2438	60	2464
9	2413	35	2439	61	2465
10	2414	36	2440	62	2466
11	2415	37	2441	63	2467
12	2416	38	2442	64	2468
13	2417	39	2443	65	2469
14	2418	40	2444	66	2470
15	2419	41	2445	67	2471
16	2420	42	2446	68	2472
17	2421	43	2447	69	2474
18	2422	44	2448	70	2475
19	2423	45	2449	71	2476
20	2424	46	2450	72	2477
21	2425	47	2451	73	2478
22	2426	48	2452	74	2479
23	2427	49	2453		
24	2428	50	2454		
25	2429	51	2455		
26	2430	52	2456		

Note: The more detailed channel, please refer to the product specifications

TEST CONDITION:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
RE	25deg. C, 55%RH	DC 3.0V from New Battery	Jelly
BW	25deg. C, 56%RH	DC 3.0V from New Battery	Vincent-
PLC	-	-	-



BUREAU
VERITAS

Test Report No.: RF2211WDG0097

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C, Section 15.249

ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together without any other necessary accessories or support units



BUREAU
VERITAS

Test Report No.: RF2211WDG0097

4. TEST TYPES AND RESULTS

4.1 RADIATED EMISSION MEASUREMENT

4.1.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

According to §15.249(a), the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental Frequency	Field strength of fundamental (milli-volts/meter)	Field strength of harmonics (micro-volts/meter)
902-928 MHz	50	500
2400-2483.5 MHz	50	500
5725-5875 MHz	50	500
24.0-24.25 GHz	250	2500

The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply.

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



BUREAU
VERITAS

Test Report No.: RF2211WDG0097

4.1.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESU40	100449	Feb. 22, 23
Signal and Spectrum Analyzer	Rohde&Schwarz	FSV7	102331	May. 09, 23
Active Loop Antenna (9KHz -30MHz)	SCHWARZBECK	FMZB 1519B	1519B-045	Apr. 27, 23
Amplifier (9KHz -1GHz)	Burgeon	BPA-530	100210	Mar. 08, 23
Trilog-Broadband Antenna(20M-2G)	SCHWARZBECK	VULB 9168	01282	Aug. 21, 23
Horn Antenna (1GHz -18GHz)	ETS -Lindgren	3117	00062558	Apr. 27, 23
Horn Antenna (18GHz -40GHz)	SCHWARZBECK	BBHA 9170	BBHA9170147	Apr. 28, 23
3m Semi-anechoic Chamber	ETS-LINDGREN	9m*6m*6m	NSEMC003	May 22, 23
Test Software	ADT	ADT_Radiated_V7.6.15.9.2	N/A	N/A
Broadband Preamplifier (1GHz~18GHz)	SCHWARZBECK	BBV9718	305	Apr. 26, 23
Pre-Amplifier (18GHz-40GHz)	EMCI	EMC 184045	980102	Jan. 10, 23
Test Software	ADT	ADT_Radiated_V7.6.15.9.2	N/A	N/A
BLUETOOTH TESTER	Rohde&Schwarz	CBT32	100811	N/A

NOTES:

1. The test was performed in 966 Chamber.
2. The calibration interval of the above test instruments are 12 months and the calibrations are traceable to CEPREI/CHINA, GRRGT/CHINA and NIM/CHINA.
3. The horn antenna is used only for the measurement of emission frequency above1GHz if tested.
4. The FCC Site Registration No. is 749762.



BUREAU
VERITAS

Test Report No.: RF2211WDG0097

4.1.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 1.5 meters (above 1GHz) and 0.8 meters (below 1GHz) above the ground at a 3 meters semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. For below 30MHz, a loop antenna with its vertical plane is place 3m from the EUT and rotated about its vertical axis for maximum response at each azimuth about the EUT. And the centre of the loop shall be 1.3m above the ground.
- g. If the emission level of the EUT in peak mode was lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

NOTES:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz for Average detection (AV) at frequency above 1GHz.
4. If the dwell time per channel of the pulsed signal is less than 100ms, then the reading obtained with the 10Hz VBW may be further adjusted by a "duty cycle correction factor", derived from $20\log(\text{duty cycle})$, in an effort to demonstrate compliance with the 15.209 limit.
5. All modes of operation were investigated and the worst-case emissions are reported.
6. The testing of the EUT was performed on all 3 orthogonal axes; the worst-case test configuration was reported on the file test setup photo.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation.




BUREAU
VERITAS


Test Report No.: RF2211WDG0097

4.1.5 TEST SETUP

Below 30MHz test setup

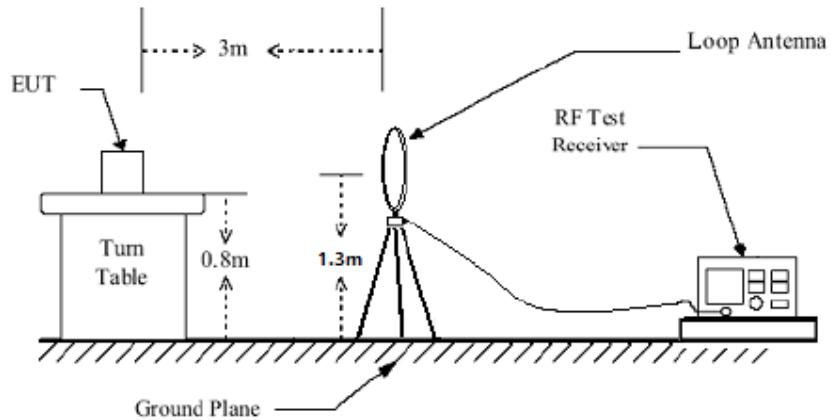

Below 1GHz test setup

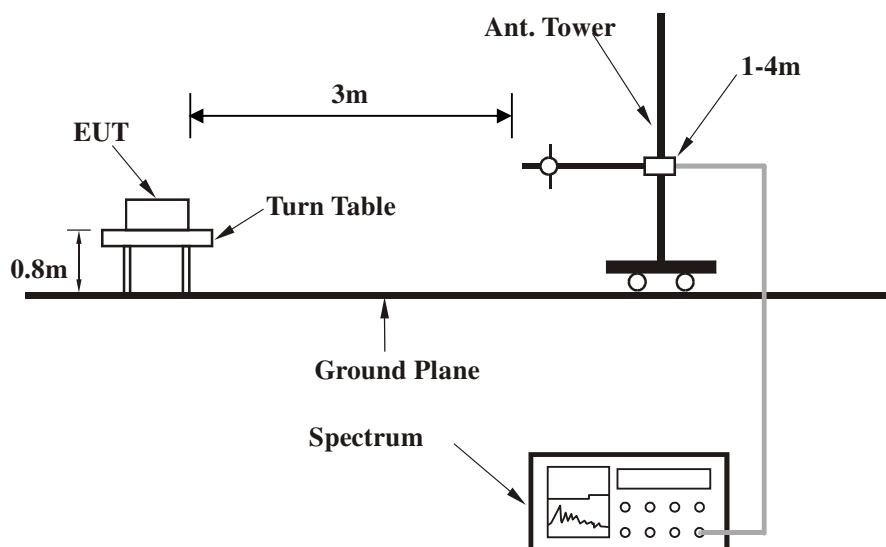




BUREAU
VERITAS

Test Report No.: RF2211WDG0097

Above 1GHz test setup

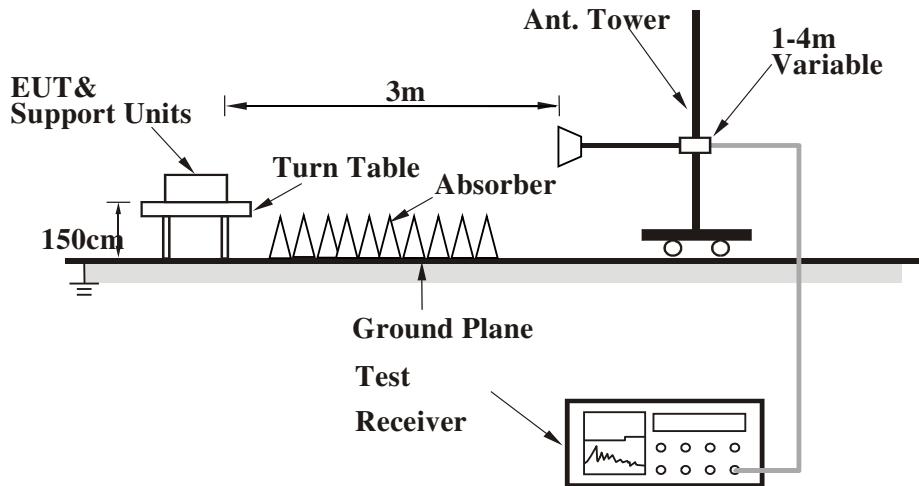

Note: For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT OPERATING CONDITIONS

- Turned on the power of all equipment.
- EUT was operated according to the type used was description in manufacturer's specifications or the User's Manual.



BUREAU
VERITAS

Test Report No.: RF2211WDG0097

4.1.7 TEST RESULTS


BELOW 1GHz WORST-CASE DATA

CHANNEL	TX Middle Channel	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9KHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	65.75	16.09 QP	40.00	-23.91	1.00 H	172	33.66	-17.57
2	141.92	13.33 QP	43.50	-30.17	1.00 H	49	29.41	-16.08
3	311.36	14.09 QP	46.00	-31.91	1.00 H	114	28.23	-14.14
4	460.59	19.20 QP	46.00	-26.80	1.00 H	203	29.07	-9.87
5	539.87	20.27 QP	46.00	-25.73	1.00 H	102	28.78	-8.51
6	586.51	23.94 QP	46.00	-22.06	1.00 H	241	31.08	-7.14

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. 9KHz~30MHz have been test and test data more than 20dB margin.
5. Margin value = Emission level – Limit value.

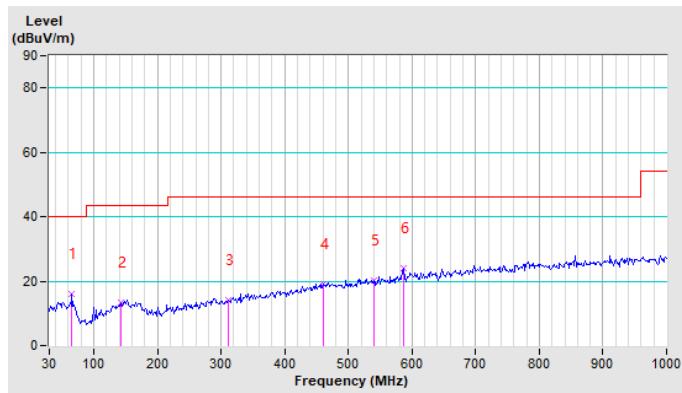

BUREAU
VERITAS


Test Report No.: RF2211WDG0097

CHANNEL	TX Middle Channel	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9KHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	65.75	13.54 QP	40.00	-26.46	1.00 V	142	31.11	-17.57
2	148.14	12.62 QP	43.50	-30.88	1.00 V	78	28.32	-15.70
3	328.46	14.01 QP	46.00	-31.99	1.00 V	263	27.75	-13.74
4	440.38	17.62 QP	46.00	-28.38	1.00 V	179	28.00	-10.38
5	556.97	20.36 QP	46.00	-25.64	1.00 V	32	28.46	-8.10
6	626.92	22.51 QP	46.00	-23.49	1.00 V	300	28.91	-6.40

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. 9KHz~30MHz have been test and test data more than 20dB margin.
5. Margin value = Emission level – Limit value.

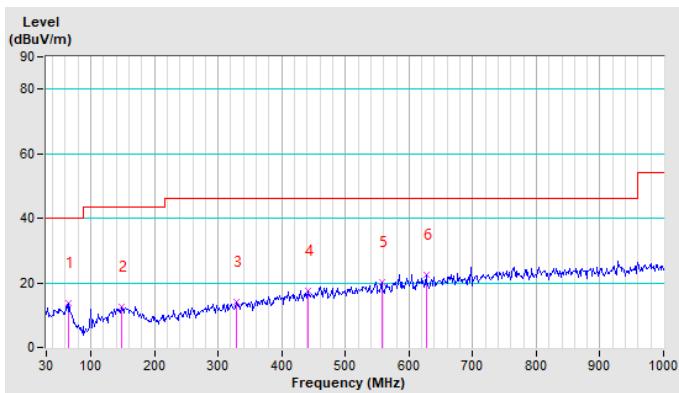

BUREAU
VERITAS

Test Report No.: RF2211WDG0097

ABOVE 1GHz WORST-CASE DATA:

CHANNEL	TX Low Channel	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2400.00	65.59 PK	74.00	-8.41	1.00 H	150	62.76	2.83
2	2400.00	52.02 AV	54.00	-1.98	1.00 H	150	49.19	2.83
3	*2405.00	91.61 PK	114.00	-22.39	1.00 H	150	88.76	2.85
4	*2405.00	78.55 AV	94.00	-15.45	1.00 H	150	75.70	2.85
5	4810.00	52.10 PK	74.00	-21.90	1.00 H	155	45.00	7.10
6	4810.00	39.04 AV	54.00	-14.96	1.00 H	155	31.94	7.10
7	7215.00	53.66 PK	74.00	-20.34	1.00 H	154	43.70	9.96
8	7215.00	40.60 AV	54.00	-13.40	1.00 H	154	30.64	9.96

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2400.00	61.33 PK	74.00	-12.67	1.00 V	120	58.50	2.83
2	2400.00	47.74 AV	54.00	-6.26	1.00 V	120	44.91	2.83
3	*2405.00	85.79 PK	114.00	-28.21	1.00 V	120	82.94	2.85
4	*2405.00	72.73 AV	94.00	-21.27	1.00 V	120	69.88	2.85
5	4810.00	51.94 PK	74.00	-22.06	1.00 V	120	44.84	7.10
6	4810.00	38.88 AV	54.00	-15.12	1.00 V	120	31.78	7.10
7	7215.00	54.83 PK	74.00	-19.17	1.00 V	154	44.87	9.96
8	7215.00	41.77 AV	54.00	-12.23	1.00 V	154	31.81	9.96

REMARK:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. Refer as ANSI C63.10, clause 7.5 average value of pulsed emissions. Adjusted by a "duty cycle correction factor", derived from $20\log$ (duty cycle). Average emission = peak emission + $20\log$ (duty cycle). Please see page 21 for plotted duty.




BUREAU
VERITAS


Test Report No.: RF2211WDG0097

Band edge Plot

2405MHz Horizontal

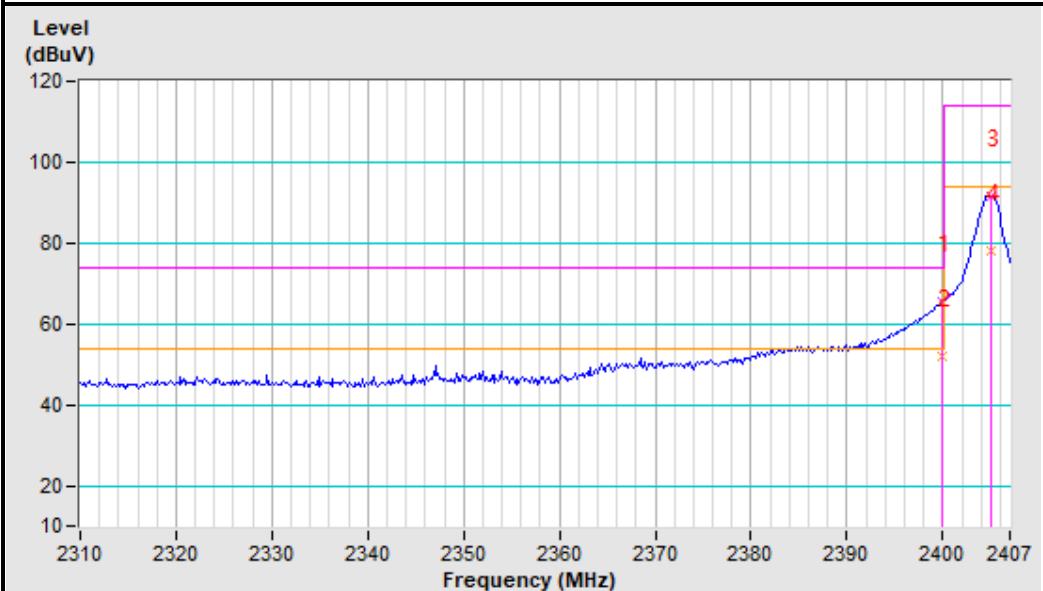

2405MHz Vertical

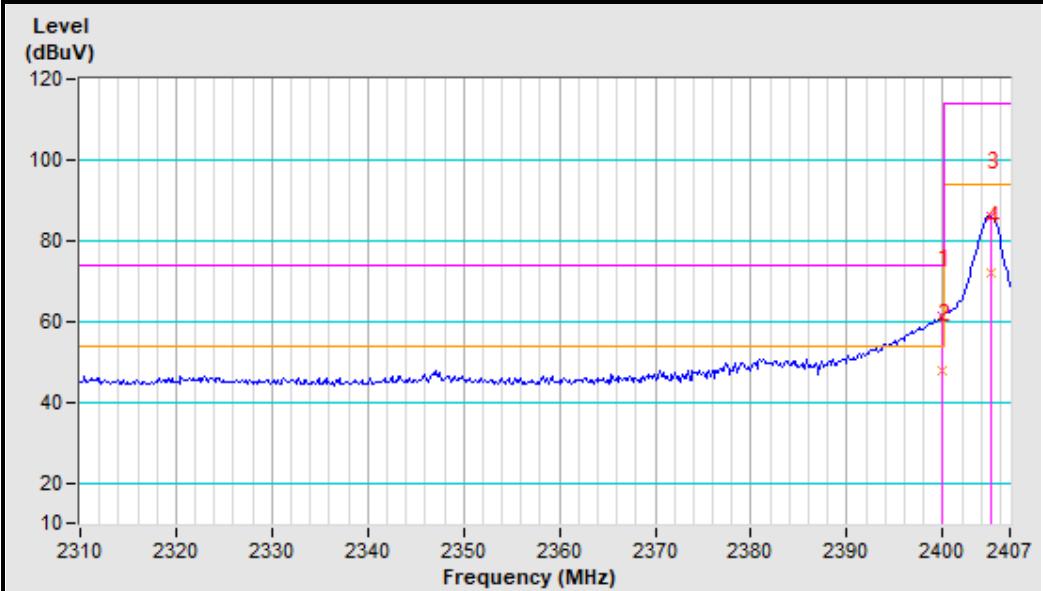

BUREAU
VERITAS

Test Report No.: RF2211WDG0097

CHANNEL	TX Middle Channel	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2440.00	85.00 PK	114.00	-29.00	1.00 H	155	82.05	2.95
2	*2440.00	71.94 AV	94.00	-22.06	1.00 H	155	68.99	2.95
3	4880.00	51.77 PK	74.00	-22.23	1.00 H	158	44.15	7.62
4	4880.00	38.71 AV	54.00	-15.29	1.00 H	158	31.09	7.62
5	7320.00	54.36 PK	74.00	-19.64	1.00 H	154	44.26	10.10
6	7320.00	41.30 AV	54.00	-12.70	1.00 H	154	31.20	10.10
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2440.00	91.00 PK	114.00	-23.00	1.00 V	125	88.05	2.95
2	*2440.00	77.94 AV	94.00	-16.06	1.00 V	125	74.99	2.95
3	4880.00	51.96 PK	74.00	-22.04	1.00 V	155	44.34	7.62
4	4880.00	38.90 AV	54.00	-15.10	1.00 V	155	31.28	7.62
5	7320.00	54.83 PK	74.00	-19.17	1.00 V	135	44.73	10.10
6	7320.00	41.77 AV	54.00	-12.23	1.00 V	135	31.67	10.10

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. Refer as ANSI C63.10, clause 7.5 average value of pulsed emissions. Adjusted by a "duty cycle correction factor", derived from $20\log$ (duty cycle). Average emission = peak emission + $20\log$ (duty cycle). Please see page 21 for plotted duty.

BUREAU
VERITAS

Test Report No.: RF2211WDG0097

CHANNEL	TX High Channel	DETECTOR FUNCTION		Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz			Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2479.00	90.73 PK	114.00	-23.27	1.00 H	125	87.66	3.07
2	*2479.00	77.67 AV	94.00	-16.33	1.00 H	125	74.60	3.07
3	2483.50	65.66 PK	74.00	-8.34	1.00 H	145	62.58	3.08
4	2483.50	52.06 AV	54.00	-1.94	1.00 H	145	48.98	3.08
5	4958.00	52.41 PK	74.00	-21.59	1.00 H	120	44.21	8.20
6	4958.00	39.35 AV	54.00	-14.65	1.00 H	120	31.15	8.20
7	7437.00	54.99 PK	74.00	-19.01	1.00 H	122	44.72	10.27
8	7437.00	41.93 AV	54.00	-12.07	1.00 H	122	31.66	10.27
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2479.00	84.94 PK	114.00	-29.06	1.00 V	133	81.87	3.07
2	*2479.00	71.88 AV	94.00	-22.12	1.00 V	133	68.81	3.07
3	2483.50	58.91 PK	74.00	-15.09	1.00 V	133	55.83	3.08
4	2483.50	45.34 AV	54.00	-8.66	1.00 V	133	42.26	3.08
5	4958.00	52.00 PK	74.00	-22.00	1.00 V	110	43.80	8.20
6	4958.00	38.94 AV	54.00	-15.06	1.00 V	110	30.74	8.20
7	7437.00	55.13 PK	74.00	-18.87	1.00 V	154	44.86	10.27
8	7437.00	42.07 AV	54.00	-11.93	1.00 V	154	31.80	10.27

REMARK:


1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. Refer as ANSI C63.10, clause 7.5 average value of pulsed emissions. Adjusted by a "duty cycle correction factor", derived from $20\log$ (duty cycle). Average emission = peak emission + $20\log$ (duty cycle). Please see page 21 for plotted duty.



BUREAU
VERITAS

Test Report No.: RF2211WDG0097

Band edge Plot

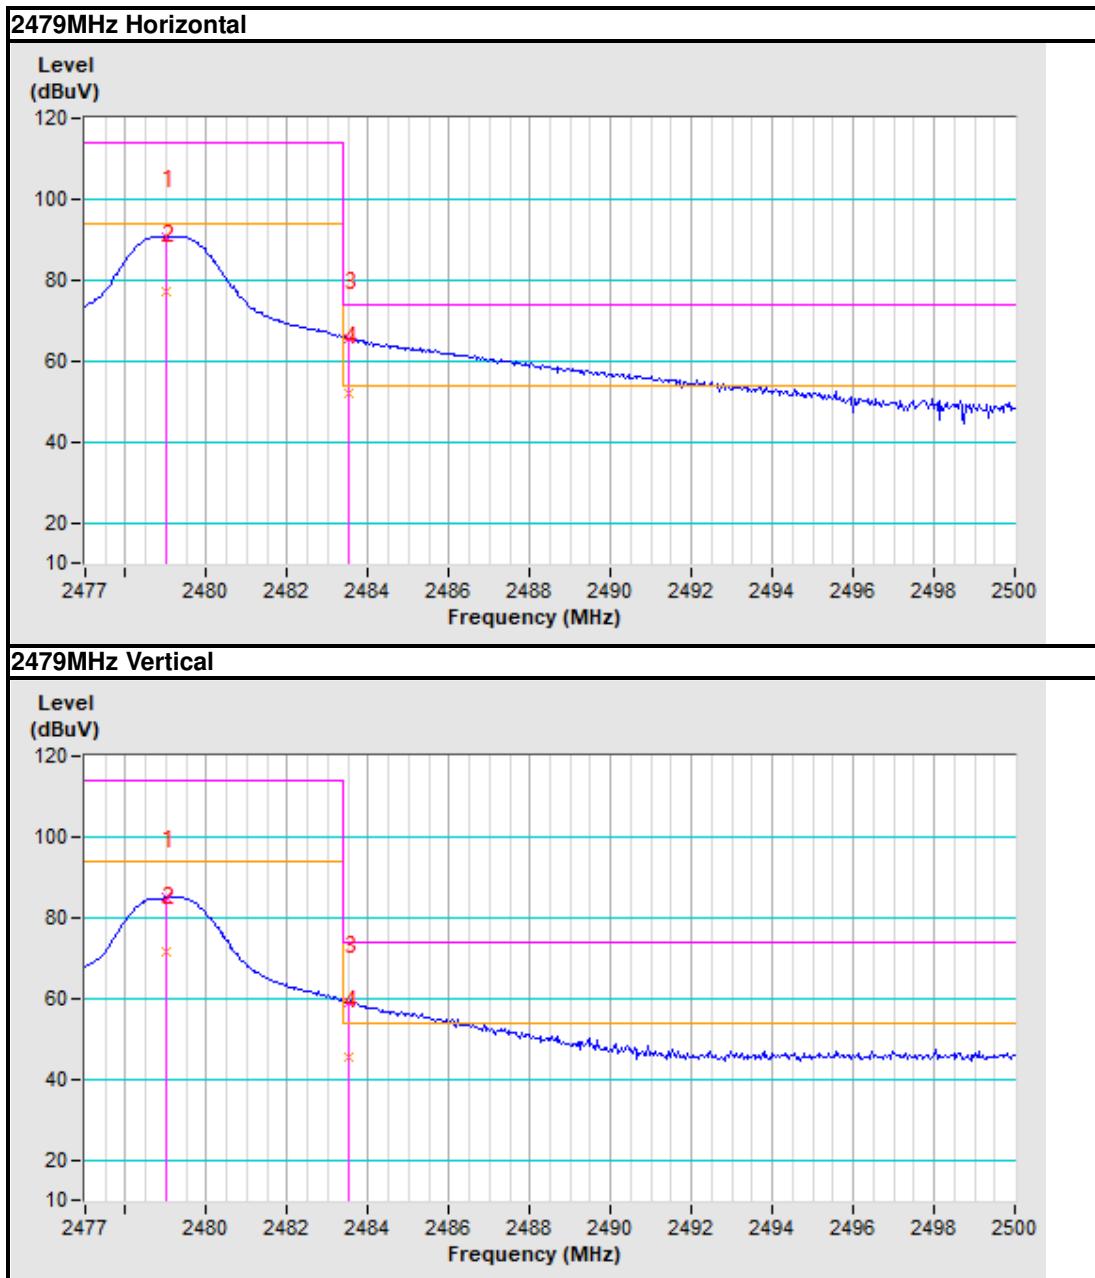




BUREAU
VERITAS

Test Report No.: RF2211WDG0097

Duty Cycle:

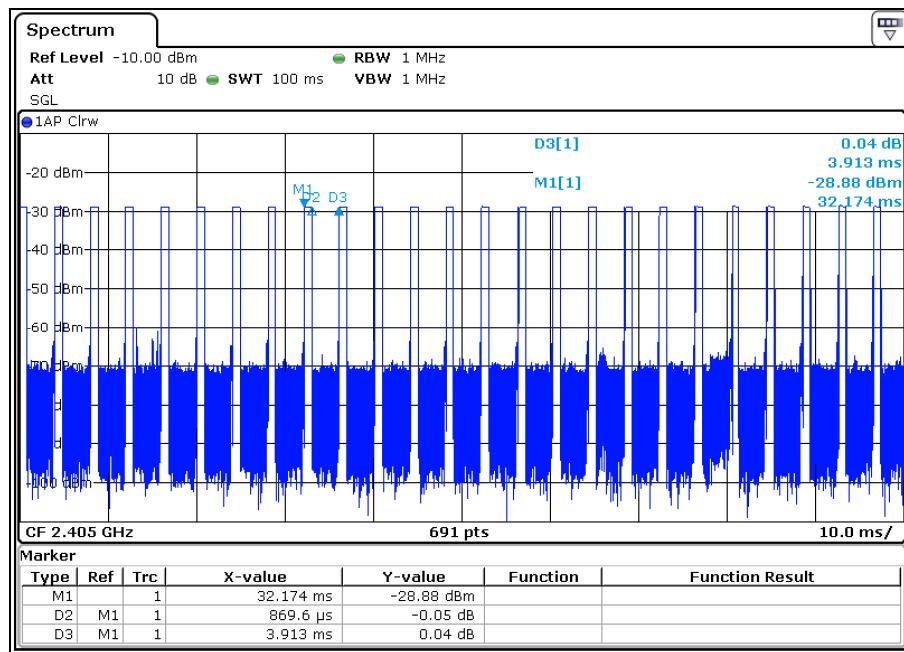

T_p = 3.913ms

T_{on} = 0.8696ms

$$\text{Duty Cycle} = \text{T}_{on} / \text{T}_p * 100\% = 0.8696/3.913 \approx 22.22\%$$

$$\text{AV factor} = 20 \log (\text{Duty cycle}) = 20 \log (22.22\%) \approx -13.06\text{dB}$$



BUREAU
VERITAS

Test Report No.: RF2211WDG0097

4.2 20dB BANDWIDTH MEASUREMENT

4.2.1 LIMITS OF 20dB BANDWIDTH MEASUREMENT

According to FCC 15.215(c), must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

4.2.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Next Cal.
Power Sensor	Keysight	U2021XA	MY57320002	Feb. 23, 23
Power Meter	Anritsu	ML2495A	1139001	Aug. 22, 23
Power Sensor	Anritsu	MA2411B	1531155	Aug. 22, 23
Digital Multimeter	FLUKE	15B	A1220010DG	N/A
Humid & Temp Programmable Tester	Haida	HD-225T	110807201	Nov. 02, 23
Oscilloscope	Agilent	DSO9254A	MY51260160	Jul. 27, 23
Signal and Spectrum Analyzer	Rohde&Schwarz	FSV40	101094	Jan. 16, 23
Signal Generator	Agilent	N5183A	MY50140980	Jul. 20, 23
MXG-B RF Vector Signal Generator	Keysight	N5182B	MY56200288	Jul. 20, 23
BLUETOOTH TESTER	Rohde&Schwarz	CBT32	100811	N/A
Attenuator	MINI	BW-S10W2+	S130129FGE2	N/A
DC Source	Keysight	E3642A	MY56146098	N/A
Test software	ADT	ADT_RF Test Software V6.6.5.3	N/A	N/A

NOTES:

1. The test was performed in RF Oven room. (Chenwu)
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GRRG/CHINA and NIM/CHINA.



BUREAU
VERITAS

Test Report No.: RF2211WDG0097


4.2.3 TEST PROCEDURE

- a. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- c. Measure the frequency difference of two frequencies that were attenuated 20dB from the reference level. Record the frequency difference as the emission bandwidth.
- d. Repeat above procedures until all frequencies measured were complete.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation.

4.2.5 TEST SETUP

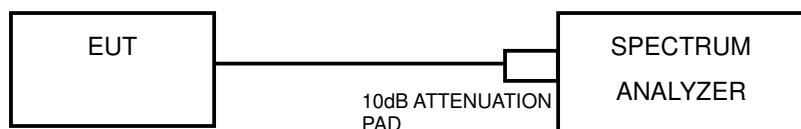

4.2.6 EUT OPERATING CONDITIONS

- a) Turned on the power of all equipment.
- b) EUT was operated according to the type used was description in manufacturer's specifications or the User's Manual.




BUREAU
VERITAS

Test Report No.: RF2211WDG0097

4.2.7 TEST RESULTS

CHANNEL	CHANNEL FREQUENCY (MHz)	20dB BANDWIDTH (MHz)
Low	2405	0.4457
Middle	2440	0.5268
High	2479	0.5384

Test Data: Low channel

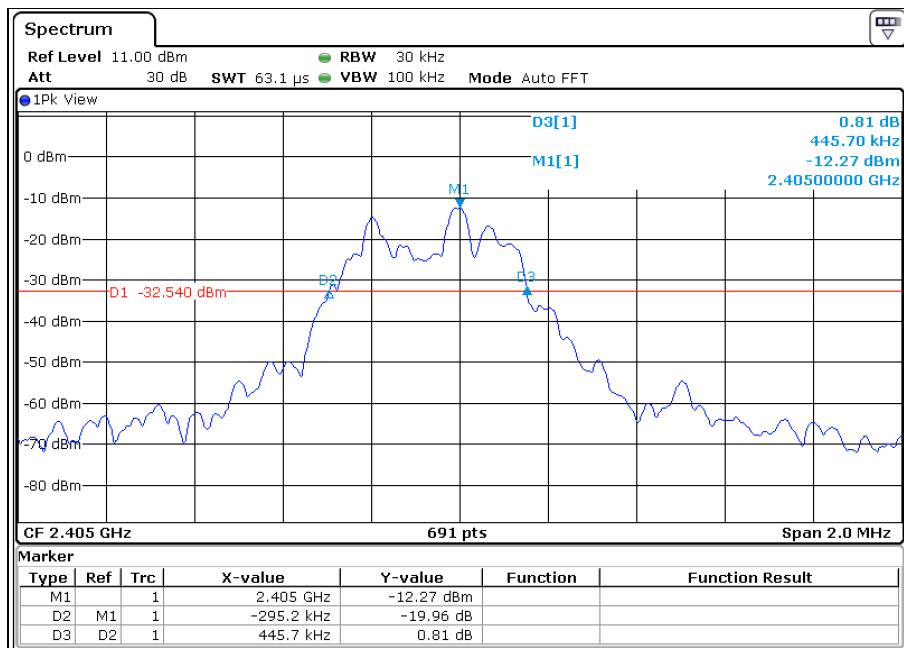





BUREAU
VERITAS

Test Report No.: RF2211WDG0097

Test Data: Middle channel

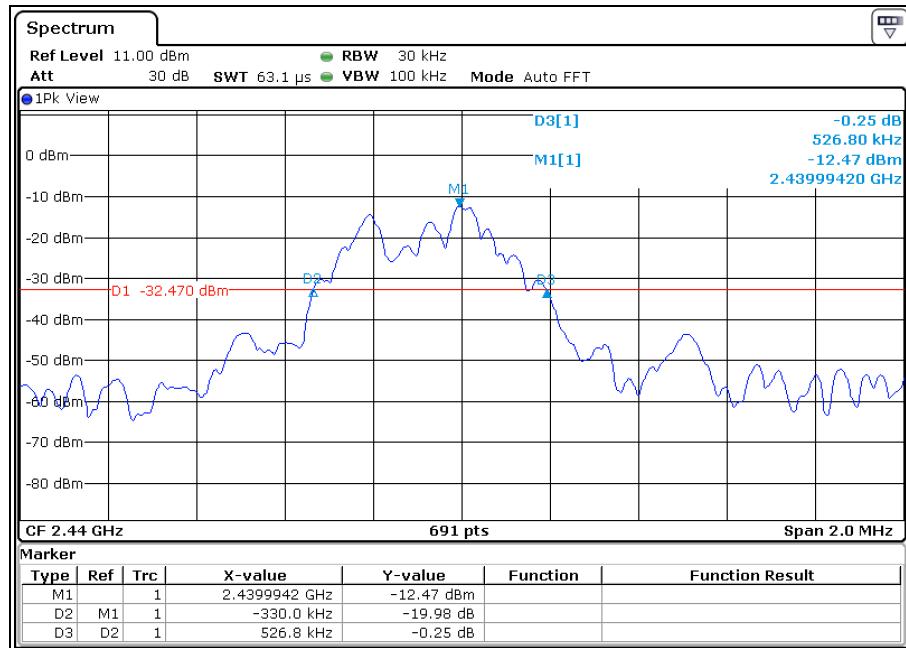

Test Data: High channel

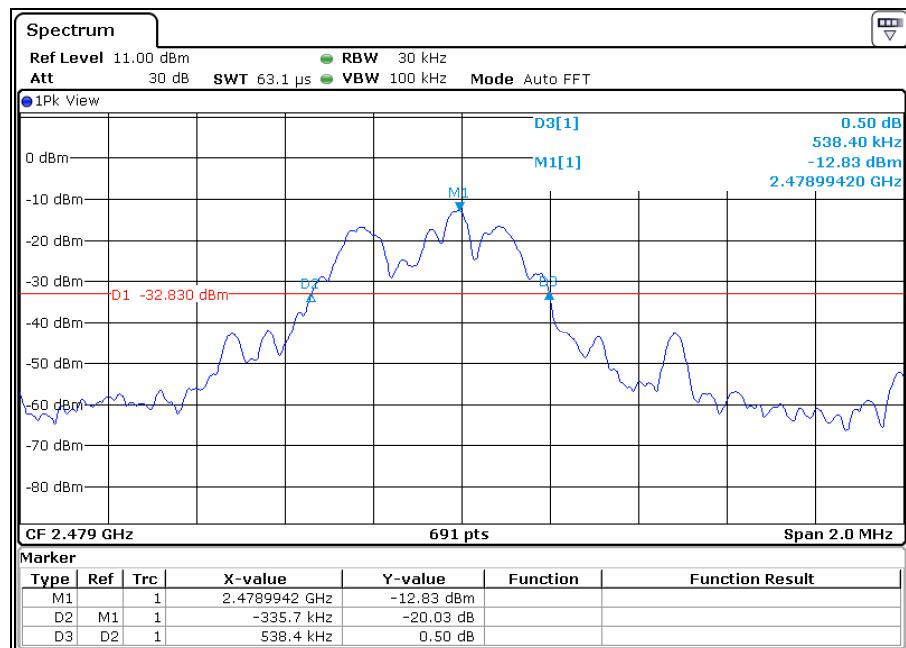



BUREAU
VERITAS

Test Report No.: RF2211WDG0097

5. PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



BUREAU
VERITAS

Test Report No.: RF2211WDG0097

6. APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.

---END---